

Prüfbericht-Nr.: Test report no.:	CN26VTXQ 001	Auftrags-Nr.: Order no.:	48285501	Seite 1 von 24 Page 1 of 24																								
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2025-12-16																									
Auftraggeber: Client:	IPEVO CORP. No. 348, Sec. 6, Nanjing E. Rd., Neihsu Dist., Taipei City 114030, Taiwan (R.O.C.)																											
Prüfgegenstand: Test item:	VZ-X Wireless/HDMI/USB Document Camera																											
Bezeichnung / Typ-Nr.: Identification / Type no.:	CDVH-04IP																											
Auftrags-Inhalt: Order content:	Test Report for JP compliance (WLAN 2.4G)																											
Prüfgrundlage: Test specification:	ARIB STD-T66 (V3.7), MIC notice 88 Appendix 43 Article 2-1-19 of the Certification Ordinance																											
Wareneingangsdatum: Date of sample receipt:	2025-11-04																											
Prüfmuster-Nr.: Test sample no.:	A004130810-002 A004130810-001																											
Prüfzeitraum: Testing period:	2026-01-13 - 2026-01-14																											
Ort der Prüfung: Place of testing:	TÜV Rheinland Taiwan Ltd. New Taipei Branch																											
Prüflaboratorium: Testing laboratory:	TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories																											
Prüfergebnis*: Test result*:	Pass																											
zusammengestellt von: compiled by:	genehmigt von: authorized by:																											
Datum: Date:	2026-01-26	Ausstellungsdatum: Issue date:	2026-01-26																									
Stellung / Position:	Section Manager	Stellung / Position:	Senior Project Manager																									
Sonstiges / Other:																												
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged																										
<table><tr><td>* Legende:</td><td>1 = sehr gut</td><td>2 = gut</td><td>3 = befriedigend</td><td>4 = ausreichend</td><td>5 = mangelhaft</td></tr><tr><td></td><td>P(ass) = entspricht o.g. Prüfgrundlage(n)</td><td></td><td>F(ail) = entspricht nicht o.g. Prüfgrundlage(n)</td><td>N/A = nicht anwendbar</td><td>N/T = nicht getestet</td></tr><tr><td>* Legend:</td><td>1 = very good</td><td>2 = good</td><td>3 = satisfactory</td><td>4 = sufficient</td><td>5 = poor</td></tr><tr><td></td><td>P(ass) = passed a.m. test specification(s)</td><td></td><td>F(ail) = failed a.m. test specification(s)</td><td>N/A = not applicable</td><td>N/T = not tested</td></tr></table>					* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend	5 = mangelhaft		P(ass) = entspricht o.g. Prüfgrundlage(n)		F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet	* Legend:	1 = very good	2 = good	3 = satisfactory	4 = sufficient	5 = poor		P(ass) = passed a.m. test specification(s)		F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend	5 = mangelhaft																							
	P(ass) = entspricht o.g. Prüfgrundlage(n)		F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet																							
* Legend:	1 = very good	2 = good	3 = satisfactory	4 = sufficient	5 = poor																							
	P(ass) = passed a.m. test specification(s)		F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested																							
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>																												

Prüfbericht-Nr.: CN26VTXQ 001
Test report no.:

Seite 2 von 24
Page 2 of 24

Anmerkungen Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 3 von 24
Page 3 of 24

TEST SUMMARY

Report Section	Test Item	Result
5.1	Frequency Tolerance	Pass
5.2	Occupied Bandwidth	Pass
5.3	Spreading Bandwidth	Pass
5.4	Spurious Emissions of Transmitter	Pass
5.5	Antenna Power	Pass
5.6	Spurious Emissions of Receiver	Pass
5.7	Carrier Sense	Pass
5.8	Interference Prevention Function	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 4 von 24
Page 4 of 24

Contents

HISTORY OF THIS TEST REPORT	7
1. GENERAL REMARKS	8
1.1 COMPLEMENTARY MATERIALS.....	8
1.2 DECISION RULE OF CONFORMITY	8
2. TEST SITES	9
2.1 TEST LABORATORY	9
2.2 TEST FACILITY.....	9
2.3 TRACEABILITY	10
2.4 CALIBRATION	10
2.5 MEASUREMENT UNCERTAINTY	10
3. GENERAL PRODUCT INFORMATION.....	11
3.1 PRODUCT FUNCTION AND INTENDED USE	11
3.2 SYSTEM DETAILS AND RATINGS.....	11
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	11
4. TEST SET-UP AND OPERATION MODES.....	12
4.1 PRINCIPLE OF CONFIGURATION SELECTION	12
4.2 CARRIER FREQUENCY AND CHANNEL.....	12
4.3 TEST OPERATION AND TEST SOFTWARE.....	13
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	14
5. TEST RESULTS (WLAN 2.4GHz)	15
5.1 FREQUENCY TOLERANCE MEASUREMENT.....	15
5.2 OCCUPIED BANDWIDTH MEASUREMENT (99% POWER BANDWIDTH)	16
5.3 SPREADING BANDWIDTH MEASUREMENT (90% POWER BANDWIDTH).....	17
5.4 SPURIOUS EMISSIONS FOR TRANSMITTER MEASUREMENT	18
5.5 ANTENNA POWER MEASUREMENT	19
5.6 SPURIOUS EMISSIONS FOR RECEIVER MEASUREMENT	20
5.7 CARRIER SENSE MEASUREMENT	21
5.8 INTERFERENCE PREVENTION FUNCTION.....	23
6. PHOTOGRAPHS OF THE TEST SETUP	24

Prüfbericht - Nr.: **CN26VTXQ 001**
Test Report No.

Seite 5 von 24
Page 5 of 24

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.:
Test Report No.

CN26VTXQ 001

Seite 6 von 24
Page 6 of 24



Prüfbericht - Nr.: **CN26VTXQ 001**
Test Report No.

Seite 7 von 24
Page 7 of 24

HISTORY OF THIS TEST REPORT

Revision	Description	Date Issued
R01	Original Release	2026-01-26

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 8 von 24
Page 8 of 24

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
ARIB STD-T66 (V3.7), MIC notice 88 Appendix 43 Article 2-1-19 of the Certification Ordinance

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 9 von 24
Page 9 of 24

2. Test Sites

2.1 Test Laboratory

TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 10 von 24
Page 10 of 24

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Occupied Bandwidth	$\pm 5 \%$
RF power, conducted	$\pm 1.5 \text{ dB}$
unwanted emissions, conducted	$\pm 3 \text{ dB}$
Temperature	$\pm 1 \text{ }^{\circ}\text{C}$
Humidity	$\pm 5 \%$
DC and low frequency voltages	$\pm 3 \%$

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 11 von 24
Page 11 of 24

3. General Product Information

3.1 Product Function and Intended Use

The EUT is an VZ-X Wireless/HDMI/USB Document Camera. It contains a WLAN compatible module enabling the user to communicate data through a Wireless interface.
For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Technical Specification of EUT

Item	EUT information
Kind of Equipment/Test Item	VZ-X Wireless/HDMI/USB Document Camera
Type Identification	CDVH-04IP
Trademark	IPEVO
Operating Frequency	2412 MHz ~ 2462 MHz
Channel Number	802.11b/g/n HT20: 11 802.11n HT40: 7
Operation Voltage	5 Vdc (USB) 3.7 Vdc (Battery)
Modulation	DSSS (DBPSK, DQPSK, CCK) OFDM (BPSK, QPSK, 16QAM, 64QAM)
Rated RF Power Density	Refer to Note 1
Conducted RF Output Power Density	Refer to Note 1
Antenna Gain	Ant 1: 1.3 dBi Ant 2: 1.3 dBi
Accessory Device	Refer to 4.4

Note:

1. The maximum power density table listed as below:

WLAN 2.4GHz	Rated Power (W/MHz)	Total Conducted RF Output Power Density (mW/MHz)
802.11b	0.00960	9.53
802.11g	0.00970	9.63
802.11n HT20	0.00990	9.90
802.11n HT40	0.00500	4.93

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Table for Parameters of Test Software Setting

802.11b		802.11g		802.11n HT20		802.11n HT40	
Frequency (MHz)	Power Setting	Frequency (MHz)	Power Setting	Frequency (MHz)	Power Setting	Frequency (MHz)	Power Setting
2412	33/35	2412	48/48	2412	48/48	2422	48/48
2442	34/36	2442	50/50	2442	50/50	2442	49/49
2462	35/37	2462	51/51	2462	51/51	2452	49/49

4.2 Carrier Frequency and Channel

802.11b, 802.11g and 802.11n HT20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

802.11n HT40:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	8	2447
4	2427	9	2452
5	2432		
6	2437		
7	2442		

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

The samples were used as follows:

A004130810-002

A004130810-001

Full test was applied on all test modes, but only worst case was shown.

The EUT provides two completed transmitters and receivers.

Modulation Mode	Tx Function
802.11b	2TX
802.11g	2TX
802.11n HT20	2TX
802.11n HT40	2TX

* The EUT supports SISO and MIMO functions. Since the power setting of SISO mode is the same as the MIMO mode of each chain, only MIMO mode was used in the final test.

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Frequency Tolerance	22.2-22.5 °C	60.1-60.6 %	Blake Wang
Occupied Bandwidth	22.2-22.5 °C	60.1-60.6 %	Blake Wang
Spread Bandwidth	22.2-22.5 °C	60.1-60.6 %	Blake Wang
Spurious Emissions	22.2-22.5 °C	60.1-60.6 %	Blake Wang
Antenna Power	22.2-22.5 °C	60.1-60.6 %	Blake Wang
Receiver Spurious Emissions	22.2-22.5 °C	60.1-60.6 %	Blake Wang
Carrier Sense	23.6-23.9 °C	48.3-49.4 %	Rita Chen

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 14 von 24
Page 14 of 24

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT

None

Support Unit

Support Unit					
No	Description	Brand	Model	S/N	Remark
-	Notebook	Acer	N20C4	NXA1UTA00114210D5C3400	--
-	AP	NetGear	RAXE500	6JX62477A03CE	--

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 15 von 24
Page 15 of 24


5. Test Results (WLAN 2.4GHz)

5.1 Frequency Tolerance Measurement

Limit Tolerance of frequency shall be +/- 50 ppm

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manu- facturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date		Cal. Unit	Cal. Method
						From	Until		
Spectrum Analyzer	Keysight	N9010A	MY52221334	2025/03/13	2026/03/12	2026/01/13	2026/01/14	ITRI	C
Power Meter	Anritsu	ML2495A	1901008	2025/02/26	2026/02/25	2026/01/13	2026/01/14	ITRI	C
Power Sensor	Aniritsu	MA2411B	1725269	2025/02/26	2026/02/25	2026/01/13	2026/01/14	ITRI	C
True RMS Multimeter	Pro'sKit	MT1706	19007158	2025/11/28	2026/11/27	2026/01/13	2026/01/14	ITRI	C

Note: Calibration Method

- Calibration conducted by the National Institute of Information and Communications Technology(NICT) or a designated calibration agency under Article 102-18 paragraph (1) of the Radio Law.
- Calibration conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992) Japan Calibration Service System.
- Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- Calibration conducted by using other equipment that listed above from a) to c).

Test Result

Please refer to Appendix A.

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 16 von 24
Page 16 of 24


5.2 Occupied Bandwidth Measurement (99% Power Bandwidth)

Limit

Item	Limit	Remark
Occupied Bandwidth	< 26 MHz	802.11b, g & 802.11n/ac/ax 20MHz
Occupied Bandwidth	< 40 MHz	802.11n/ac/ax 40MHz

Kind of Test Site Shielded room

Test Setup



Test Instruments

Refer to 5.1 Test Instruments

Test Result

Please refer to Appendix A.

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 17 von 24
Page 17 of 24


5.3 Spreading Bandwidth Measurement (90% Power Bandwidth)

Limit

Item	Limit	Remark
Spreading Bandwidth	≥ 500 kHz	(For DSSS, FHSS)
Spreading Factor	≥ 5	Operating Frequency 2400 to 2483.5 MHz

Kind of Test Site Shielded room

Test Setup



Test Instruments

Refer to 5.1 Test Instruments

Test Result

Please refer to Appendix A.

Prüfbericht - Nr.: **CN26VTXQ 001**
Test Report No.

Seite 18 von 24
Page 18 of 24

5.4 Spurious Emissions for Transmitter Measurement

Limit

Frequencies (MHz)	Limit
Operating Frequency 2400 to 2483.5 MHz	
30.0 to 2387.0 MHz	$\leq 2.5 \text{ uW/MHz}$
2387.0 to 2400.0 MHz	$\leq 25 \text{ uW/MHz}$
2483.5 to 2496.5 MHz	$\leq 25 \text{ uW/MHz}$
2496.5 to 12500.0 MHz	$\leq 2.5 \text{ uW/MHz}$

Kind of Test Site Shielded room

Test Setup



Test Instruments

Refer to 5.1 Test Instruments

Test Result

Please refer to Appendix A.

Prüfbericht - Nr.: **CN26VTXQ 001**
Test Report No.

Seite 19 von 24
Page 19 of 24

5.5 Antenna Power Measurement

Limit

Modulation System	Frequency Band Used	Antenna Power (Max.)	EIRP (Max.)	
			Omni-Directional Case	Directional Case
DS	2400 – 2483.5 MHz	10 mW/MHz	12.14 dBm/MHz (16.37 mW/MHz)	22.14 dBm/MHz (163.68 mW/MHz)
OFDM (Note 1)	2400 – 2483.5 MHz	10 mW/MHz	12.14 dBm/MHz (16.37 mW/MHz)	22.14 dBm/MHz (163.68 mW/MHz)
OFDM (Note 2)	2400 – 2483.5 MHz	5 mW/MHz	9.14 dBm/MHz (8.20mW/MHz)	19.14 dBm/MHz (82.04 mW/MHz)


Note:

1. Occupied bandwidth is less than 26 MHz.
2. Occupied bandwidth is more than 26 MHz and less than 40 MHz.
3. The half-power beam width for directional antenna shall be $360/A$ degrees or less, where A is a ratio which causes the EIRP concerned to exceed the omni-directional EIRP upper limit.
4. Tolerance of antenna power shall be +20% (upper value).

Kind of Test Site

Shielded room

Test Setup

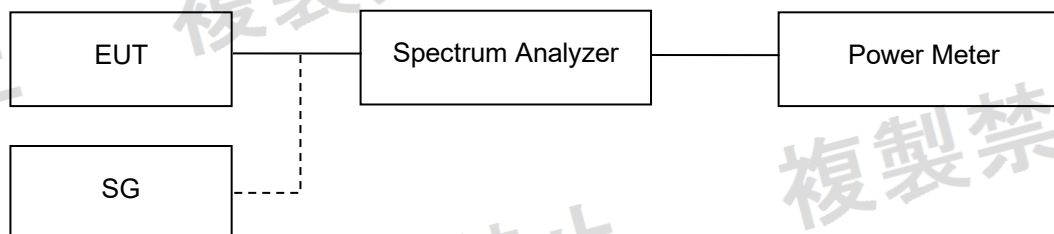

Test Instruments

Refer to 5.1 Test Instruments

Test Result

Please refer to Appendix A.

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 20 von 24
Page 20 of 24


5.6 Spurious Emissions for Receiver Measurement

Limit

Frequencies (MHz)	Limit
Below 1 GHz	≤ 4 nW (-54 dBm)
Above 1 GHz	≤ 20 nW (-47 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Refer to 5.1 Test Instruments

Test Result

Please refer to Appendix A.

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.


Seite 21 von 24
Page 21 of 24

5.7 Carrier Sense Measurement

Limit EUT stop RF transmission signal after carrier inject to EUT.

Kind of Test Site Shielded room

Test Setup

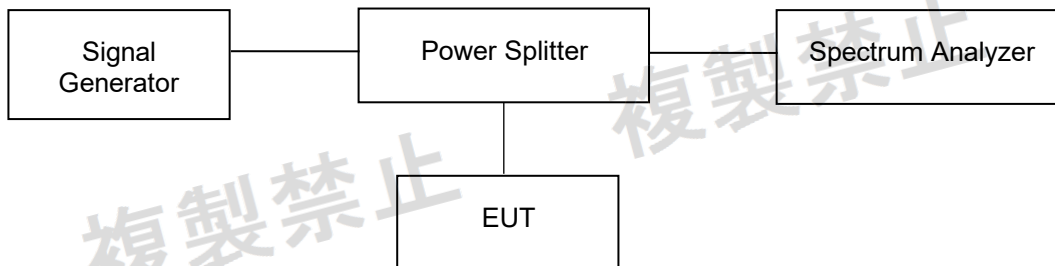

Test Instruments

Kind of Equipment	Manu- facturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date		Cal. Unit	Cal. Method
						From	Until		
Spectrum Analyzer	Keysight	N9000B	MY62361339	2025/02/13	2026/02/12	2026/01/14	2026/01/14	ITRI	C
MXG Vector Signal Generator	Agilent	N5182B	MY53050524	2025/03/20	2026/03/19	2026/01/14	2026/01/14	ITRI	C

Note: Calibration Method

- Calibration conducted by the National Institute of Information and Communications Technology(NICT) or a designated calibration agency under Article 102-18 paragraph (1) of the Radio Law.
- Calibration conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992) Japan Calibration Service System.
- Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- Calibration conducted by using other equipment that listed above from a) to c).

Prüfbericht - Nr.: **CN26VTXQ 001**
Test Report No.

Seite 22 von 24
Page 22 of 24

Test Result

Carrier Sense 40MHz				
Test Frequency	MHz	2422	2442	2452
Mini. Antenna Gain	dBi	1.00	1.00	1.00
Carrier Level Limit	dBm	-43.89	-43.96	-44.00
Result	Pass/Fail	Pass	Pass	Pass

Note:

Pcs (dBm) = $22.79 + Gr - 20\log(F)$

Gr: Antenna Gain

F: Transmission Frequency (MHz)

CF = Distributor loss + cable loss

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 23 von 24
Page 23 of 24


5.8 Interference Prevention Function

Limit

Radio equipment used mainly on the same premises and automatically transmits or receives identification code.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Refer to 5.1 Test Instruments


Test Result

WiFi 2.4 GHz	Test Result
	Pass

Prüfbericht - Nr.: CN26VTXQ 001
Test Report No.

Seite 24 von 24
Page 24 of 24

6. Photographs of the Test Setup

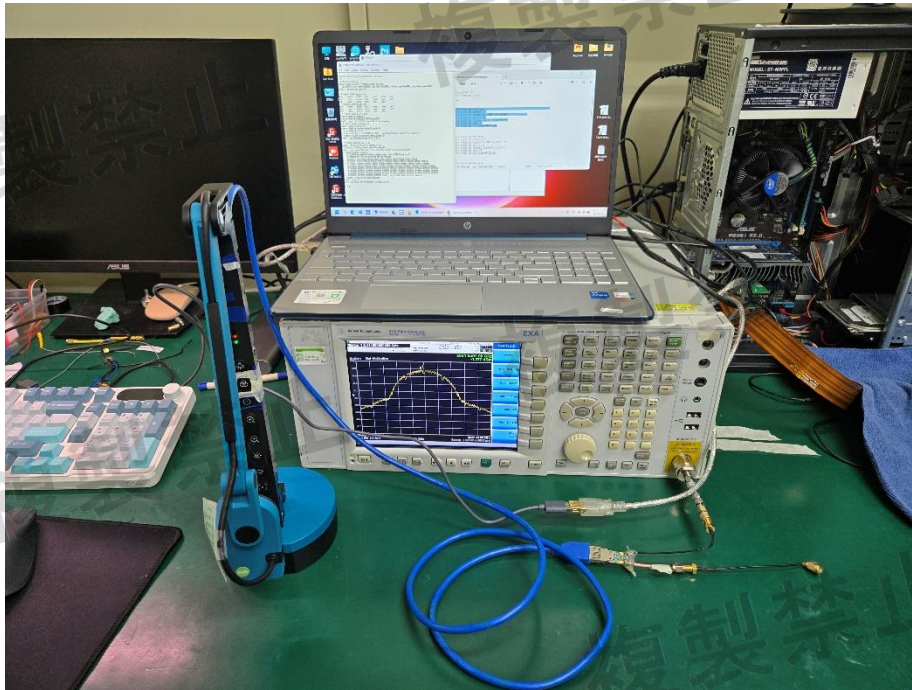

WiFi 2.4G Test Data

CN26VTXQ 001

Appendix A: Test Results of Conducted Test

Test Result of 802.11b

Test Result		Test Voltage	V	Unit	Limit	DC				3.7 V				DC				4.07 V				DC				Result
						2412	2442	2462	(normal)	2412	2442	2462	(high)	2412	2442	2462	(low)									
Frequency Error																										
Port 1		Test Frequency	MHz		50	-9.12	2.87	3.66		-5.39	3.69	3.66		-2.90	3.69	4.06							Pass			
						ppm	50	-7.88	-8.19	-8.53	-8.29	-8.19	-8.53	-8.29	-8.19	-8.12										Pass
Occupied Bandwidth																										
Port 1			MHz	26	15.07	15.22	15.22		15.07	15.22	15.22		15.15	15.22	15.22											
					15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00													
Port 2		MAX	MHz	26	15.07	15.22	15.22		15.07	15.22	15.22		15.15	15.22	15.22								Pass			
Spurious Emissions																										
Port 1	30.0 ~ 2387.0 MHz	uW/MHz	-	0.053	0.090	0.082		0.102	0.103	0.071		0.159	0.078	0.075												
				2332.49	80.39	79.80	2386.12	80.39	79.80	89.52	81.27	80.68														
Port 2	30.0 ~ 2387.0 MHz	uW/MHz	-	0.037	0.045	0.035		0.034	0.038	0.033		0.037	0.039	0.036												
				2316.58	2319.82	2350.17	2370.79	2289.47	2303.32	2334.55	2354.29	2379.63														
	SUM	uW/MHz	2.5	0.089	0.135	0.117		0.136	0.142	0.104		0.197	0.117	0.111									Pass			
Port 1	2387.0 ~ 2400.0 MHz	uW/MHz	-	2.512	0.014	0.012		2.200	0.014	0.013		1.149	0.014	0.010												
				2399.71	2395.44	2387.38	2398.58	2396.42	2388.08	2398.78	2399.96	2388.29														
Port 2	2387.0 ~ 2400.0 MHz	uW/MHz	-	4.573	0.038	0.030		4.815	0.036	0.032		1.365	0.037	0.035												
				2399.86	2395.71	2389.21	2399.99	2394.59	2388.15	2399.14	2390.89	2399.99														
	SUM	uW/MHz	25	7.086	0.052	0.042		7.015	0.051	0.045		2.514	0.051	0.044									Pass			
Port1	2483.5 ~ 2496.5 MHz	uW/MHz	-	0.024	0.015	0.031		0.020	0.015	0.031		0.020	0.015	0.025												
				2491.87	2487.80	2485.25	2491.91	2484.46	2486.32	2491.91	2487.41	2489.30														
Port 2	2483.5 ~ 2496.5 MHz	uW/MHz	-	0.024	0.025	0.030		0.026	0.027	0.030		0.030	0.028	0.032												
				2486.04	2488.32	2487.33	2487.22	2483.55	2484.96	2484.75	2484.29	2484.05														
	SUM	uW/MHz	25	0.048	0.039	0.061		0.046	0.042	0.061		0.050	0.042	0.057									Pass			
Port 1	2496.5 ~ 12500.0 MHz	uW/MHz	-	0.013	0.019	0.008		0.253	0.009	0.009		0.010	0.010	0.011												
				2534.02	2522.76	2536.52	2521.51	2522.76	2501.50	2534.02	2601.55	2522.76														
Port 2	2496.5 ~ 12500.0 MHz	uW/MHz	-	0.016	0.016	0.020		0.014	0.013	0.022		0.014	0.017	0.014												
				2550.28	2544.02	2496.50	2499.00	2535.27	2500.25	2522.76	2571.54	2517.76														
	SUM	uW/MHz	2.5	0.029	0.035	0.028		0.267	0.022	0.031		0.024	0.027	0.025									Pass			
Antenna Power																										
Port 1			mW/MHz	10	4.80	4.77	4.73		4.80	4.76	4.72		4.81	4.76	4.73											
					4.65	4.75	4.80	4.64	4.74	4.80	4.65	4.75	4.79													
Port 2			mW/MHz	10	9.45	9.52	9.53		9.44	9.50	9.52		9.46	9.51	9.52											
					%	-	-1.56	-0.83	-0.73	-1.67	-1.04	-0.83	-1.46	-0.94	-0.83											
			%	20																			Pass			
Collateral Emissions																										
Port 1	30.0 ~ 1000.0 MHz	nW	4	0.002	0.002	0.003		0.002	0.001	0.002		0.001	0.002	0.003												
				902.38	825.38	799.16	879.95	859.57	851.33	781.72	733.46	739.40														
Port 2	30.0 ~ 1000.0 MHz	nW	4	0.002	0.002	0.002		0.002	0.001	0.001		0.002	0.002	0.002												
				993.45	748.62	973.44	753.10	915.36	882.86	320.07	461.10	410.41														
	SUM	nW	4	0.003	0.003	0.005		0.004	0.003	0.003		0.003	0.004	0.005									Pass			
Port 1	1000.0 ~ 12500.0 MHz	nW	20	0.027	0.025	0.034		0.033	0.145	0.028		0.037	0.035	0.034												
				12405.11	9269.53	12498.56	11722.22	2434.80	12446.81	1760.53	5231.09	11953.68														
Port 2	1000.0 ~ 12500.0 MHz	nW	20	0.039	0.071	0.049		0.247	0.076	0.028		0.031	0.031	0.050												
				2469.31	2406.05	2429.05	2465.00	2406.05	6637.14	5614.95	2446.31	2406.05														
	SUM	nW	20	0.065	0.096	0.082		0.279	0.221	0.056		0.068	0.066	0.085									Pass			
Interference Protection																										
				yes	Complies	Complies	Complies		Complies	Complies	Complies		Complies	Complies	Complies									Pass		
																								Pass		

Test Result of 802.11g

Test Result		Test Voltage		Unit	Limit	DC				3.7 V				DC				4.07 V				DC				3.3 V				Result
		Test Frequency		V		2412	2442	2462	(normal)	2412	2442	V	2462	(high)	2412	2442	2462	(low)	2412	2442	2462	(low)								
Frequency Error																														
Port 1			ppm	50	-10.36	-11.47	-11.78		-11.61	-11.47	-11.37		-11.61	-11.47	-11.37		-11.61	-11.47	-11.37		Pass									
Port 2			ppm	50	-7.88	-8.19	-8.12		-8.29	-8.19	-8.12		-8.29	-8.19	-8.12		-8.29	-8.19	-8.12		Pass									
Occupied Bandwidth																														
Port 1			MHz	26	16.72	16.88	16.88		16.80	16.80	16.88		16.80	16.80	16.88		16.80	16.80	16.88											
Port 2			MHz	26	16.80	16.88	16.88		16.72	16.80	16.88		16.80	16.80	16.88		16.80	16.80	16.88											
		MAX	MHz	26	16.80	16.88	16.88		16.80	16.80	16.88		16.80	16.80	16.88		16.80	16.80	16.88		Pass									
Spurious Emissions																														
Port 1	30.0 ~ 2387.0 MHz	uW/MHz	-	0.695	0.076	0.089		0.423	0.066	0.076		0.492	0.068	0.059																
		MHz	-	2385.53	2362.25	2382.29		2384.05	2362.25	2382.29		2387.00	2362.25	2382.29																
Port 2	30.0 ~ 2387.0 MHz	uW/MHz	-	1.189	0.050	0.039		0.634	0.052	0.051		0.975	0.051	0.041																
		MHz	-	2386.71	2360.19	2322.17		2386.71	2367.85	2320.11		2385.53	2323.65	2319.82																
	SUM	uW/MHz	2.5	1.884	0.126	0.109		1.057	0.118	0.127		1.466	0.119	0.100							Pass									
Port 1	2387.0 ~ 2400.0 MHz	uW/MHz	-	2.230	0.054	0.035		2.460	0.065	0.037		2.450	0.055	0.036																
		MHz	-	2399.56	2392.57	2388.55		2399.73	2398.90	2387.67		2399.88	2398.93	2387.17																
Port 2	2387.0 ~ 2400.0 MHz	uW/MHz	-	3.520	0.110	0.046		2.220	0.124	0.042		3.150	0.137	0.042																
		MHz	-	2399.94	2396.50	2392.13		2397.97	2399.99	2399.80		2399.92	2397.98	2399.88																
	SUM	uW/MHz	25	5.750	0.164	0.081		4.660	0.189	0.079		5.600	0.192	0.079							Pass									
Port1	2483.5 ~ 2496.5 MHz	uW/MHz	-	0.033	0.077	0.500		0.033	0.068	0.540		0.032	0.076	0.430																
		MHz	-	2491.97	2484.47	2483.52		2491.94	2484.26	2483.51		2492.12	2484.99	2483.83																
Port 2	2483.5 ~ 2496.5 MHz	uW/MHz	-	0.024	0.262	0.590		0.024	0.270	0.480		0.024	0.231	0.510																
		MHz	-	2486.60	2483.72	2483.55		2492.20	2483.60	2483.76		2496.24	2483.72	2483.70																
	SUM	uW/MHz	25	0.057	0.340	1.090		0.057	0.338	1.020		0.056	0.307	0.940							Pass									
Port 1	2496.5 ~ 12500.0 MHz	uW/MHz	-	0.016	0.018	0.063		0.019	0.016	0.203		0.015	0.016	0.038																
		MHz	-	2536.52	2521.51	2500.25		2539.02	2536.52	2496.50		2534.02	2531.52	2500.25																
Port 2	2496.5 ~ 12500.0 MHz	uW/MHz	-	0.017	0.019	0.067		0.017	0.020	0.162		0.017	0.016	0.093																
		MHz	-	2526.51	2550.28	2499.00		2529.02	2576.54	2496.50		2547.77	2542.77	2497.75																
	SUM	uW/MHz	2.5	0.033	0.037	0.150		0.037	0.036	0.365		0.032	0.032	0.131							Pass									
Antenna Power																														
Port 1		mW/MHz	10	4.84	4.75	4.65		4.83	4.74	4.65		4.83	4.74	4.65																
Port 2		mW/MHz	10	4.73	4.88	4.80		4.73	4.88	4.79		4.73	4.86	4.79																
	SUM	mW/MHz	10	9.57	9.63	9.45		9.56	9.62	9.44		9.56	9.60	9.44							Pass									
		%		-1.34	-0.72	-2.58		-1.44	-0.82	-2.68		-1.44	-1.03	-2.68							Pass									
		%	20																		Pass									
Collateral Emissions																														
Port 1	30.0 ~ 1000.0 MHz	nW	4	0.002	0.001	0.002		0.002	0.002	0.001		0.002	0.002	0.002																
		MHz	-	833.26	856.18	791.55		319.95	864.67	847.12		768.99	901.78	870.49																
Port 2	30.0 ~ 1000.0 MHz	nW	4	0.002	0.002	0.002		0.001	0.002	0.001		0.001	0.002	0.002																
		MHz	-	862.48	888.80	820.07		945.92	783.78	855.33		909.00	796.15	894.98																
	SUM	nW	4	0.003	0.003	0.003		0.003	0.004	0.003		0.003	0.003	0.003							Pass									
Port 1	1000.0 ~ 12500.0 MHz	nW	20	0.064	0.107	0.035		0.499	0.030	0.039		0.090	0.064	0.286																
		MHz	-	2446.31	2446.31	5297.16		2480.81	5993.86	2421.87		2446.31	2462.12	2428.18																
Port 2	1000.0 ~ 12500.0 MHz	nW	20	0.064	0.031	0.030		0.047	0.028	0.101		0.030	0.073	0.030																
		MHz	-	2426.18	9255.16	5113.20		2475.06	11996.25	2476.50		5574.70	2421.87	5252.66																
	SUM	nW	20	0.128	0.138	0.065		0.546	0.058	0.140		0.120	0.158	0.317							Pass									
Interference Distortion																														
		Compens	yes	Compens	Compens	Compens		Compens	Compens	Compens		Compens	Compens	Compens							Pass									

WiFi 2.4G Test Data

CN26VTXQ 001

Test Result of 802.11n HT20

Test Result		Unit		Limit	DC 3.7 V (normal)				DC 4.07 V (high)				DC 3.33 V (low)				Result
		Test Voltage	V		2412	2442	2462		2412	2442	2462		2412	2442	2462		
Frequency Error		Test Frequency	MHz														
Port 1	Port 2		ppm	50	-11.19	-11.88	-11.78		-11.61	-11.88	-11.78		-12.02	-11.88	-11.78	Pass	
			ppm	50	-8.29	-8.19	-8.12		-8.29	-8.19	-8.12		-8.71	-8.19	-8.12	Pass	
Occupied Bandwidth																	
Port 1	Port 2		MHz	26	17.85	17.85	17.85		17.78	17.85	17.85		17.85	17.85	17.85		
			MHz	26	17.85	17.85	17.85		17.85	17.78	17.85		17.85	17.85	17.85		
		MAX	MHz	26	17.85	17.85	17.85		17.85	17.85	17.85		17.85	17.85	17.85	Pass	
Spurious Emissions																	
Port 1	Port 2	30.0 ~ 2387.0 MHz	uW/MHz	-	0.662	0.074	0.082		0.655	0.064	0.082		0.666	0.079	0.082		
			MHz	-	2387.00	2282.40	2382.29		2387.00	2362.84	2382.58		2386.41	2361.95	2302.43		
		30.0 ~ 2387.0 MHz	uW/MHz	-	1.014	0.040	0.056		0.765	0.043	0.042		0.626	0.046	0.040		
			MHz	-	2387.00	2306.26	1766.44		2384.05	2332.19	2337.50		2386.71	2319.82	155.53		
		SUM	uW/MHz	2.5	1.675	0.114	0.138		1.620	0.107	0.104		1.293	0.125	0.122	Pass	
Port 1	Port 2	2387.0 ~ 2400.0 MHz	uW/MHz	-	2.200	0.091	0.035		2.520	0.107	0.035		2.390	0.104	0.045		
			MHz	-	2398.92	2399.24	2389.96		2399.56	2395.23	2390.85		2399.80	2399.96	2388.66		
		2387.0 ~ 2400.0 MHz	uW/MHz	-	3.020	0.157	0.040		2.520	0.177	0.038		3.140	0.211	0.049		
			MHz	-	2399.97	2399.57	2399.34		2398.69	2399.97	2398.60		2399.89	2399.98	2399.84		
		SUM	uW/MHz	25	5.220	0.249	0.075		5.040	0.284	0.072		5.530	0.315	0.093	Pass	
Port 1	Port 2	2483.5 ~ 2496.5 MHz	uW/MHz	-	0.029	0.170	0.510		0.031	0.140	0.680		0.032	0.145	0.620		
			MHz	-	2491.68	2490.94	2484.00		2492.00	2491.09	2483.50		2492.02	2489.84	2483.80		
		2483.5 ~ 2496.5 MHz	uW/MHz	-	0.027	0.155	0.780		0.028	0.127	0.770		0.021	0.115	0.830		
			MHz	-	2480.21	2485.21	2403.56		2491.21	2483.75	2403.51		2480.69	2483.52	2403.52		
		SUM	uW/MHz	25	0.056	0.325	1.290		0.058	0.268	1.450		0.054	0.280	1.450	Pass	
Port 1	Port 2	2496.5 ~ 12500.0 MHz	uW/MHz	-	0.012	0.018	0.064		0.014	0.014	0.253		0.016	0.018	0.107		
			MHz	-	2541.52	2587.79	2499.00		2536.52	2602.80	2496.50		2559.03	2561.53	2499.00		
		2496.5 ~ 12500.0 MHz	uW/MHz	-	0.023	0.019	0.374		0.018	0.018	0.102		0.014	0.021	0.151		
			MHz	-	2554.03	2542.77	2497.75		2505.25	2560.28	2499.00		2545.27	2556.53	2496.50		
		SUM	uW/MHz	2.5	0.035	0.037	0.437		0.032	0.032	0.356		0.030	0.039	0.259	Pass	
Antenna Power																	
Port 1	Port 2		mW/MHz	10	4.93	4.95	4.86		4.93	4.94	4.84		4.93	4.95	4.85		
			mW/MHz	10	4.81	4.91	5.04		4.80	4.91	5.02		4.80	4.90	5.02		
		SUM	mW/MHz	10	9.74	9.86	9.90		9.73	9.85	9.86		9.73	9.85	9.87	Pass	
			%	-	-1.62	-0.40	0.00		-1.72	-0.51	-0.40		-1.72	-0.51	-0.30	Pass	
			%	20												Pass	
Collateral Emissions																	
Port 1	Port 2	30.0 ~ 1000.0 MHz	nW	4	0.001	0.003	0.002		0.002	0.001	0.002		0.001	0.001	0.001		
			MHz	-	973.58	319.95	319.95		852.30	320.07	818.71		414.29	373.54	782.69		
		30.0 ~ 1000.0 MHz	nW	4	0.002	0.002	0.001		0.002	0.002	0.001		0.001	0.001	0.001		
			MHz	-	936.09	876.67	760.62		873.68	193.22	879.83		319.95	891.83	376.45		
		SUM	nW	4	0.003	0.004	0.003		0.003	0.003	0.003		0.003	0.003	0.003	Pass	
Port 1	Port 2	1000.0 ~ 12500.0 MHz	nW	20	0.142	0.330	0.066		0.160	0.130	0.113		0.172	0.306	0.079		
			MHz	-	2446.31	2450.62	2417.55		5767.35	2446.31	2427.62		2457.81	2479.37	2446.31		
		1000.0 ~ 12500.0 MHz	nW	20	0.074	0.097	0.065		0.066	0.265	0.061		0.030	0.317	0.039		
			MHz	-	2476.50	2406.05	2476.50		2475.06	2467.87	2475.06		11766.78	2456.37	2476.50		
		SUM	nW	20	0.216	0.428	0.131		0.226	0.395	0.174		0.203	0.623	0.118	Pass	
Interference Protection				yes	Complies	Complies	Complies		Complies	Complies	Complies		Complies	Complies	Complies	Pass	


Test Result of 802.11n HT40

Test Result		Unit		Limit	DC 3.7 V (normal)				DC 4.07 V (high)				DC 3.33 V (low)				Result		
		V	MHz		2422	2442	2452		2422	2442	4.07 V	2452		2422	2442	2452			
Test Voltage		Test Frequency																	
Frequency Error																			
Part 1	Part 2		ppm	50	-9.91	-11.88	-10.60		-11.15	-11.88	-11.01		-11.56	-11.88	-11.01		Pass		
			ppm	50	-7.43	-8.19	-11.42		-7.84	-8.19	-10.20		-8.26	-8.19	-9.38		Pass		
Occupied Bandwidth																			
Part 1	Part 2		MHz	40	36.00	36.00	36.00		36.00	36.00	36.00		36.00	36.00	36.08		Pass		
			MHz	40	36.00	36.00	36.00		36.00	36.00	35.92		36.00	36.08	35.92				
MAX			MHz	40	36.00	36.00	36.00		36.00	36.00	36.00		36.00	36.08	36.08		Pass		
Spurious Emissions																			
Part 1	Part 2	30.0 ~ 2387.0 MHz	uW/MHz	-	0.700	0.163	0.140		0.700	0.086	0.100		0.710	0.144	0.080		Pass		
			MHz	-	2386.71	2385.82	2386.12		2386.71	2383.76	2384.35		2387.00	2384.94	2372.56				
Part 1	Part 2	30.0 ~ 2387.0 MHz	uW/MHz	-	0.870	0.313	0.060		0.880	0.478	0.040		0.950	0.385	0.050		Pass		
			MHz	-	2386.41	2385.82	2382.58		2386.12	2385.53	2386.12		2386.71	2386.12	2383.76				
SUM			uW/MHz	2.5	1.570	0.476	0.200		1.580	0.564	0.140		1.660	0.529	0.130		Pass		
Part 1	Part 2	2387.0 ~ 2400.0 MHz	uW/MHz	-	1.590	8.269	0.400		1.190	8.486	0.420		1.360	7.869	0.370		Pass		
			MHz	-	2396.83	2399.86	2398.68		2396.85	2399.95	2399.94		2397.11	2399.94	2398.01				
Part 1	Part 2	2387.0 ~ 2400.0 MHz	uW/MHz	-	1.870	7.107	0.240		2.050	6.710	0.200		1.910	5.253	0.290		Pass		
			MHz	-	2398.35	2396.15	2398.70		2397.97	2396.46	2399.99		2397.98	2397.81	2399.51				
SUM			uW/MHz	25	3.460	15.376	0.640		3.240	15.196	0.620		3.270	13.122	0.660		Pass		
Part1	Part 2	2483.5 ~ 2496.5 MHz	uW/MHz	-	0.327	6.300	1.150		0.342	6.503	1.110		0.342	6.471	1.190		Pass		
			MHz	-	2487.16	2485.22	2485.00		2488.21	2483.57	2485.06		2488.73	2485.27	2485.30				
Part 2	Part 2	2483.5 ~ 2496.5 MHz	uW/MHz	-	0.443	6.398	0.630		0.427	5.925	0.530		0.431	5.971	0.500		Pass		
			MHz	-	2487.91	2483.92	2480.03		2487.96	2484.57	2489.40		2488.02	2484.00	2489.64				
SUM			uW/MHz	25	0.770	12.699	1.780		0.770	12.429	1.640		0.773	12.442	1.690		Pass		
Part 1	Part 2	2496.5 ~ 12500.0 MHz	uW/MHz	-	0.062	0.304	0.270		0.105	0.405	0.260		0.037	0.231	0.380		Pass		
			MHz	-	2502.75	2500.25	2500.25		2500.25	2500.25	2499.00		2499.00	2496.50	2496.50				
Part 2	Part 2	2496.5 ~ 12500.0 MHz	uW/MHz	-	0.113	0.203	0.470		0.156	0.141	0.730		0.158	0.136	0.830		Pass		
			MHz	-	2497.75	2507.76	2499.00		2499.00	2497.75	2496.50		2497.75	2505.25	2496.50				
SUM			uW/MHz	2.5	0.175	0.508	0.740		0.261	0.546	0.990		0.194	0.367	1.210		Pass		
Antenna Power																			
Part 1	Part 2		mW/MHz	10	2.47	2.44	2.42		2.47	2.43	2.42		2.47	2.44	2.41		Pass		
			mW/MHz	10	2.46	2.49	2.46		2.45	2.48	2.45		2.45	2.48	2.46				
Part 1	Part 2	SUM	mW/MHz	10	4.93	4.93	4.88		4.92	4.91	4.87		4.92	4.92	4.87		Pass		
			%	-	-1.40	-1.40	-2.40		-1.60	-1.80	-2.60		-1.60	-1.80	-2.60		Pass		
			%	20															
Collateral Emissions																			
Part 1	Part 2	30.0 ~ 1000.0 MHz	nW	4	0.002	0.001	0.002		0.002	0.002	0.002		0.002	0.002	0.001		Pass		
			MHz	-	897.53	888.68	875.46		937.43	320.07	320.07		320.07	856.30	398.52				
Part 2	Part 2	30.0 ~ 1000.0 MHz	nW	4	0.002	0.002	0.002		0.002	0.001	0.002		0.001	0.002	0.001		Pass		
			MHz	-	892.68	896.10	888.80		869.03	978.17	850.36		319.95	853.75	934.15				
SUM			nW	4	0.003	0.003	0.003		0.003	0.003	0.003		0.003	0.003	0.003		Pass		
Part 1	Part 2	1000.0 ~ 12500.0 MHz	nW	20	0.027	0.078	0.029		0.033	0.088	0.035		0.088	0.027	0.109		Pass		
			MHz	-	12475.56	2406.05	6013.19		12343.29	2421.87	2424.74		2421.87	4998.19	2421.87				
Part 2	Part 2	1000.0 ~ 12500.0 MHz	nW	20	0.049	0.027	0.074		0.067	0.084	0.101		0.046	0.059	0.031		Pass		
			MHz	-	2476.50	5935.55	2406.05		2476.50	2406.05	2456.37		2406.05	2421.87	9847.48				
SUM			nW	20	0.076	0.105	0.103		0.100	0.172	0.136		0.134	0.086	0.141		Pass		
Interference Protection				yes	Complies	Complies	Complies		Complies	Complies	Complies		Complies	Complies	Complies		Pass		

Test Plots of Frequency Error


802.11b:2TX

<Chain 0>

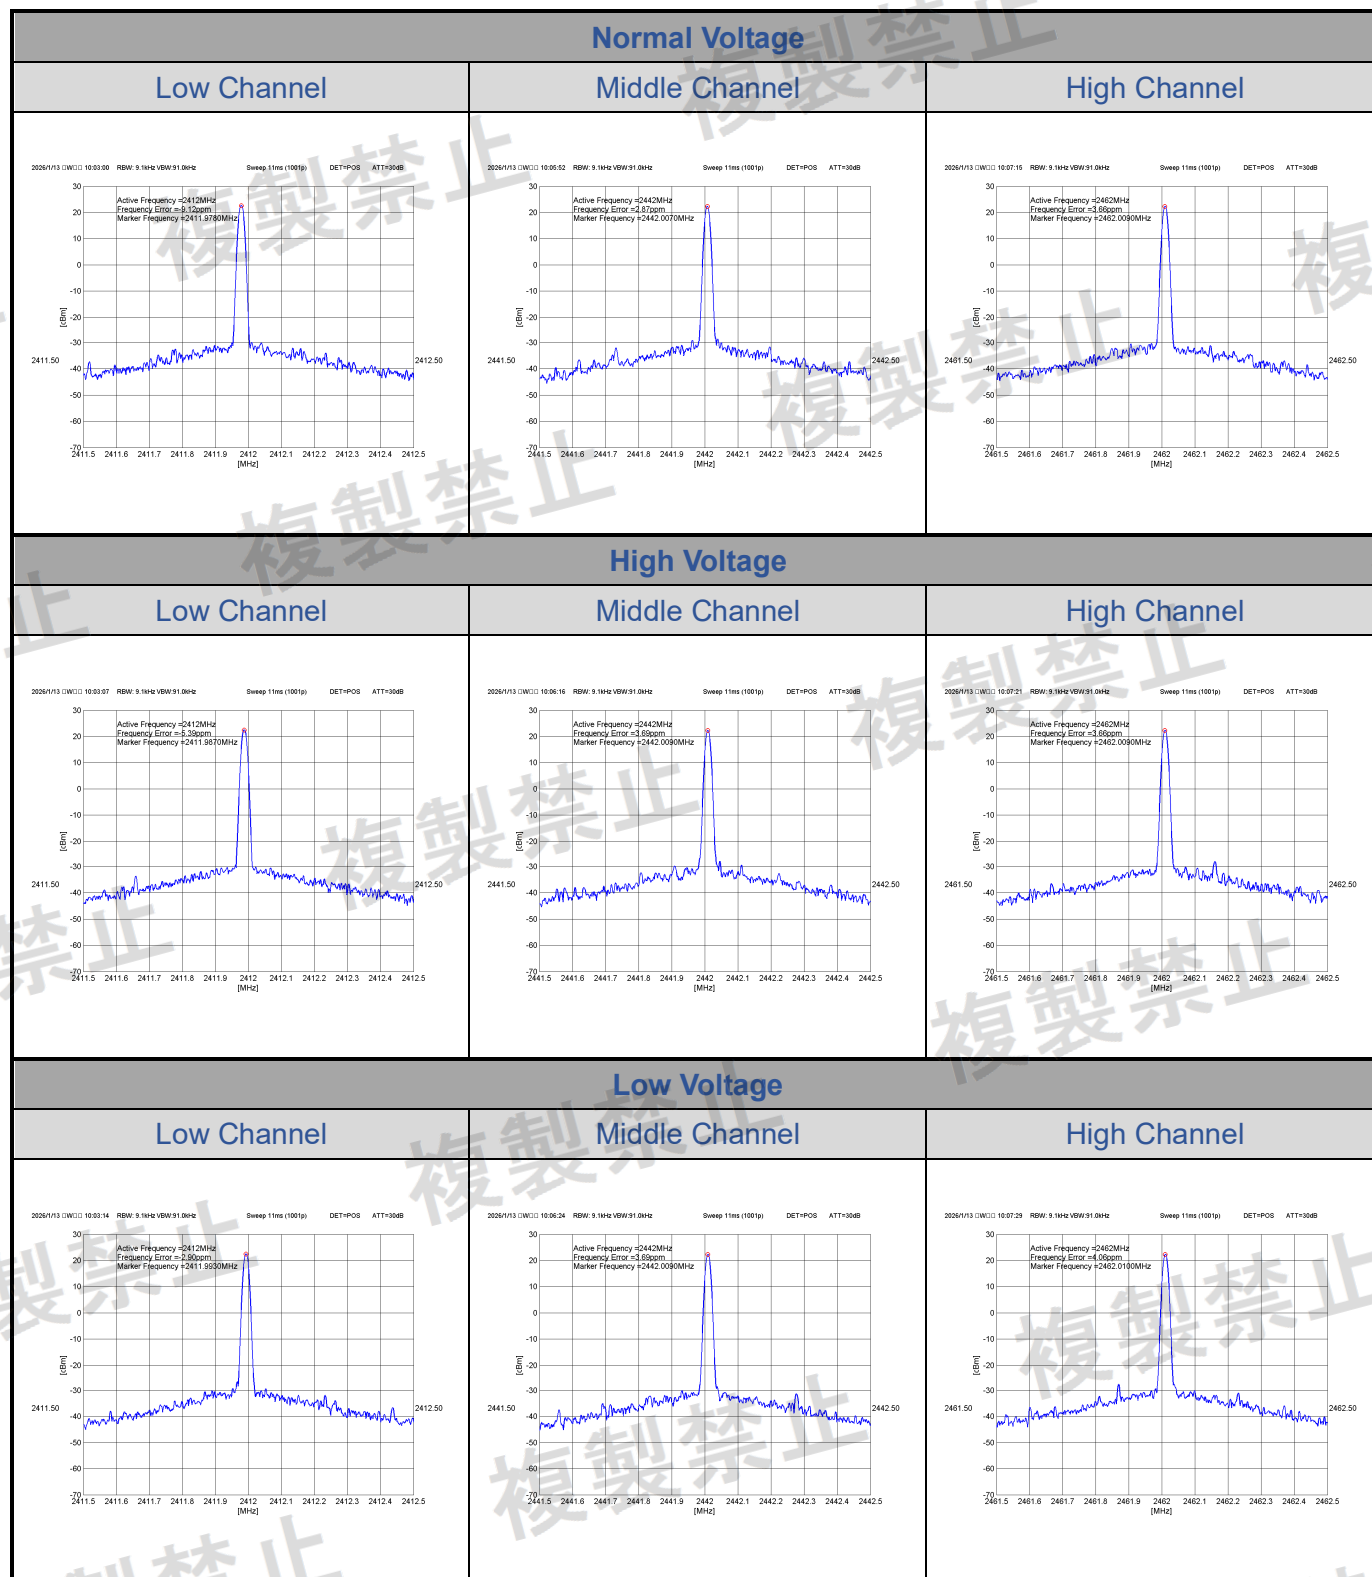


802.11b:2TX

<Chain 1>

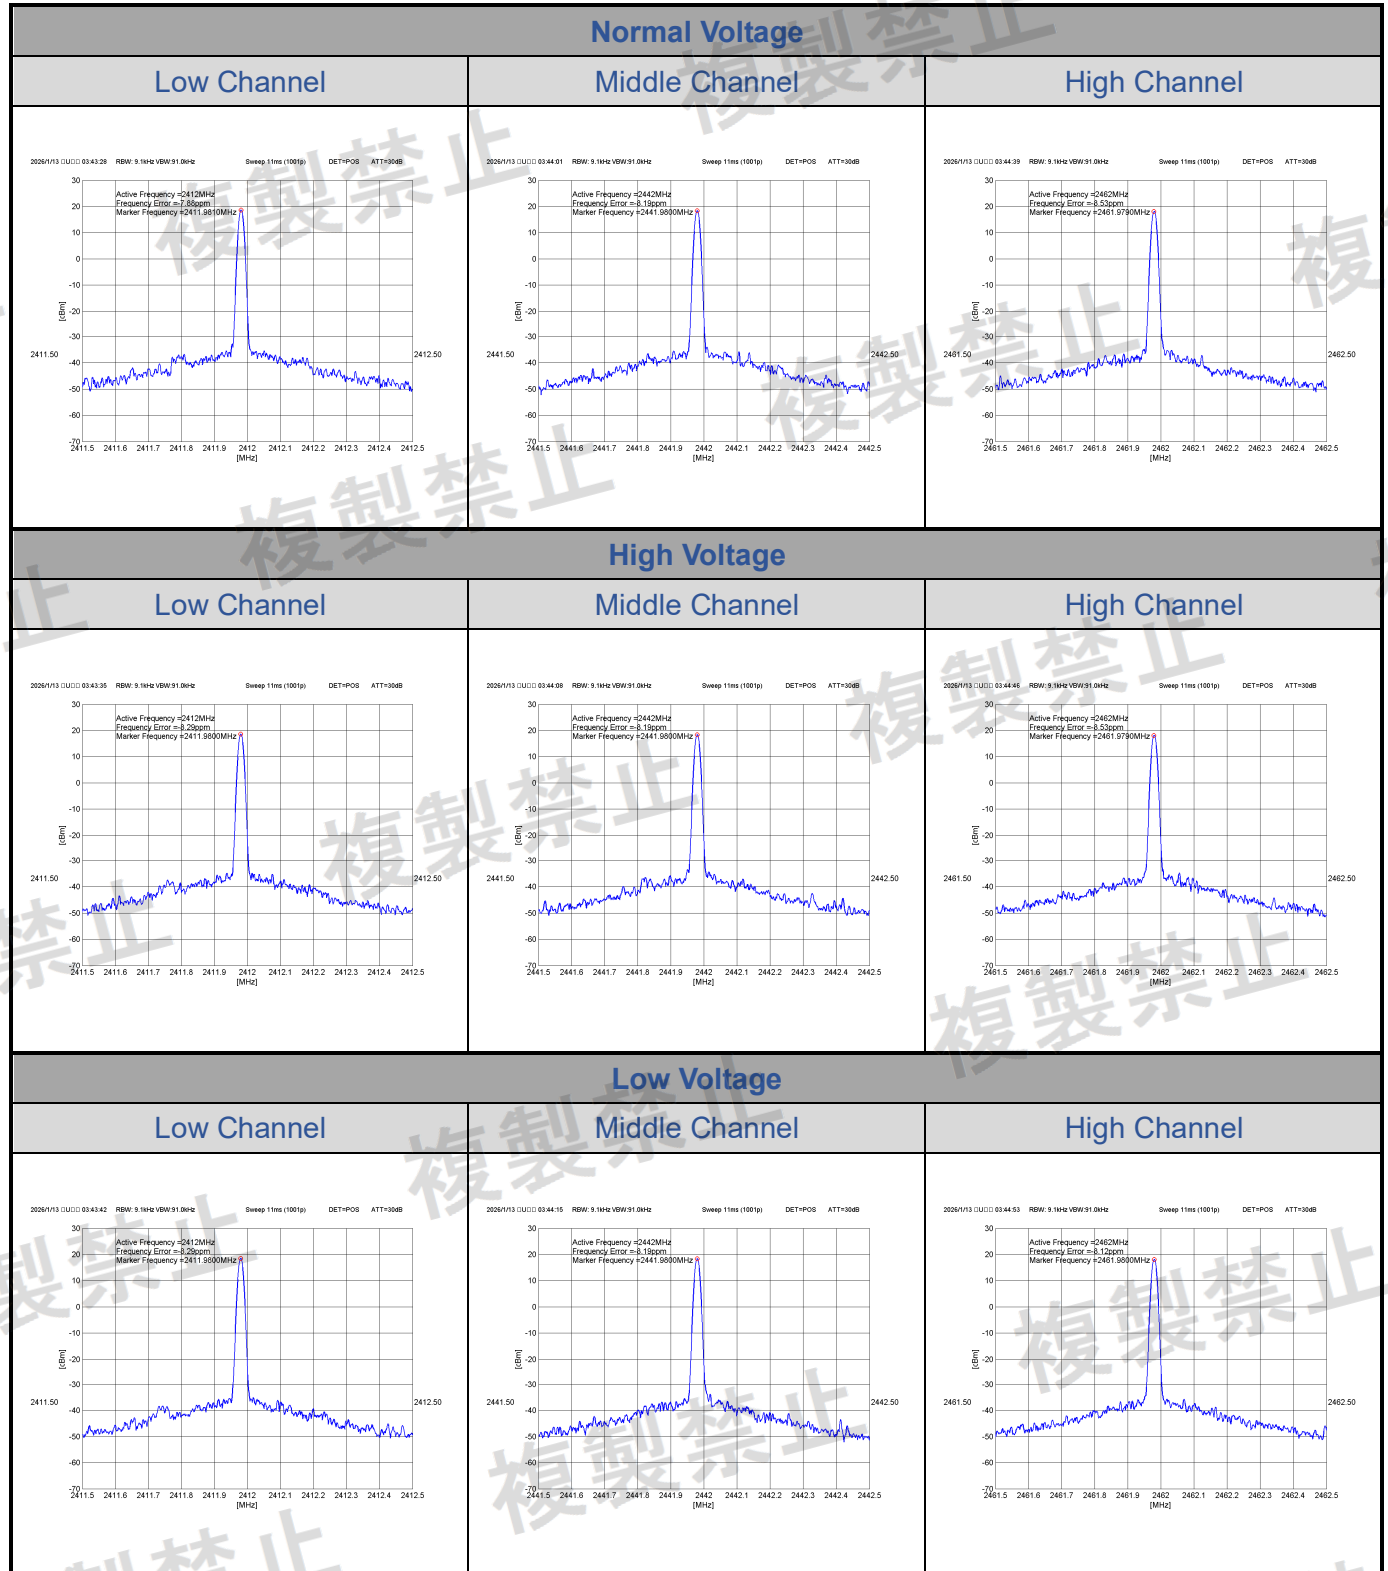


802.11g:2TX

<Chain 0>

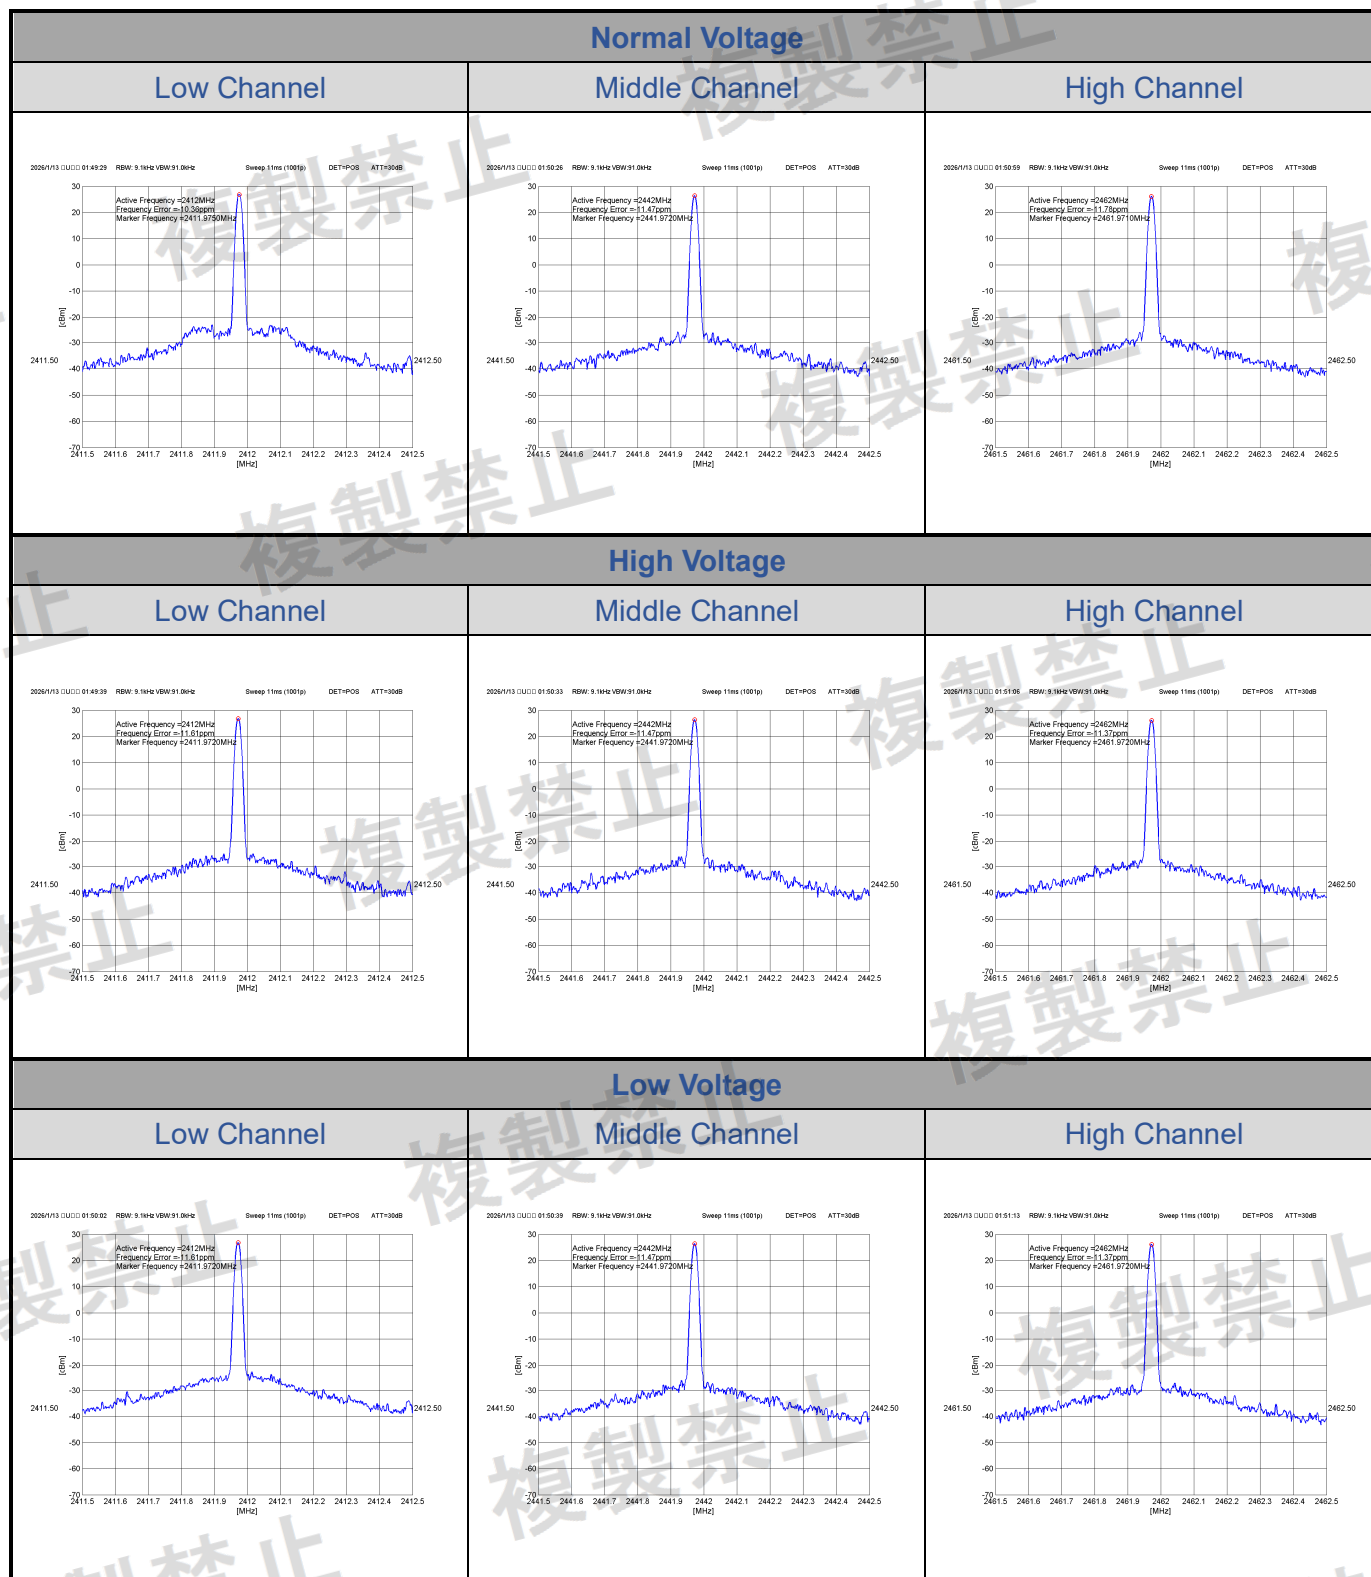


802.11g:2TX

<Chain 1>

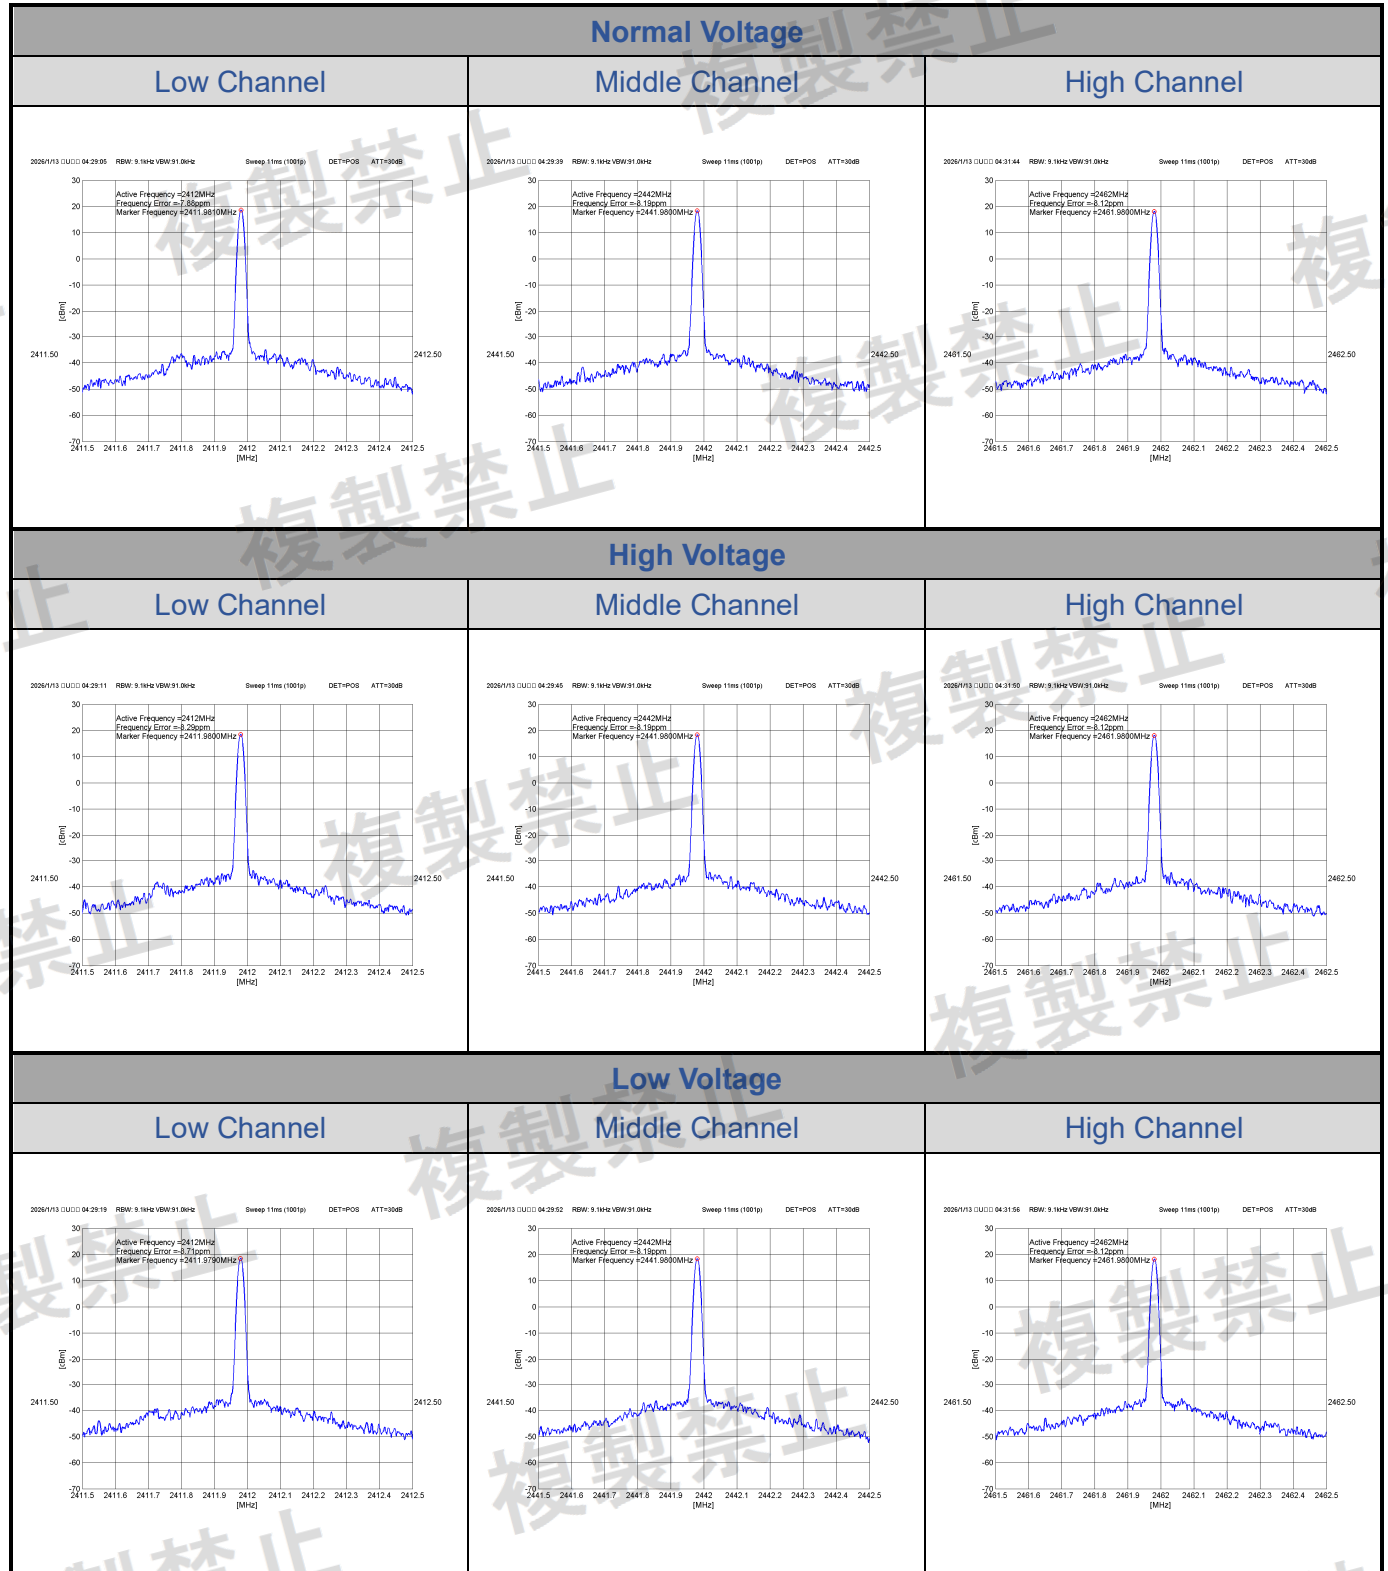


802.11n HT20:2TX

<Chain 0>

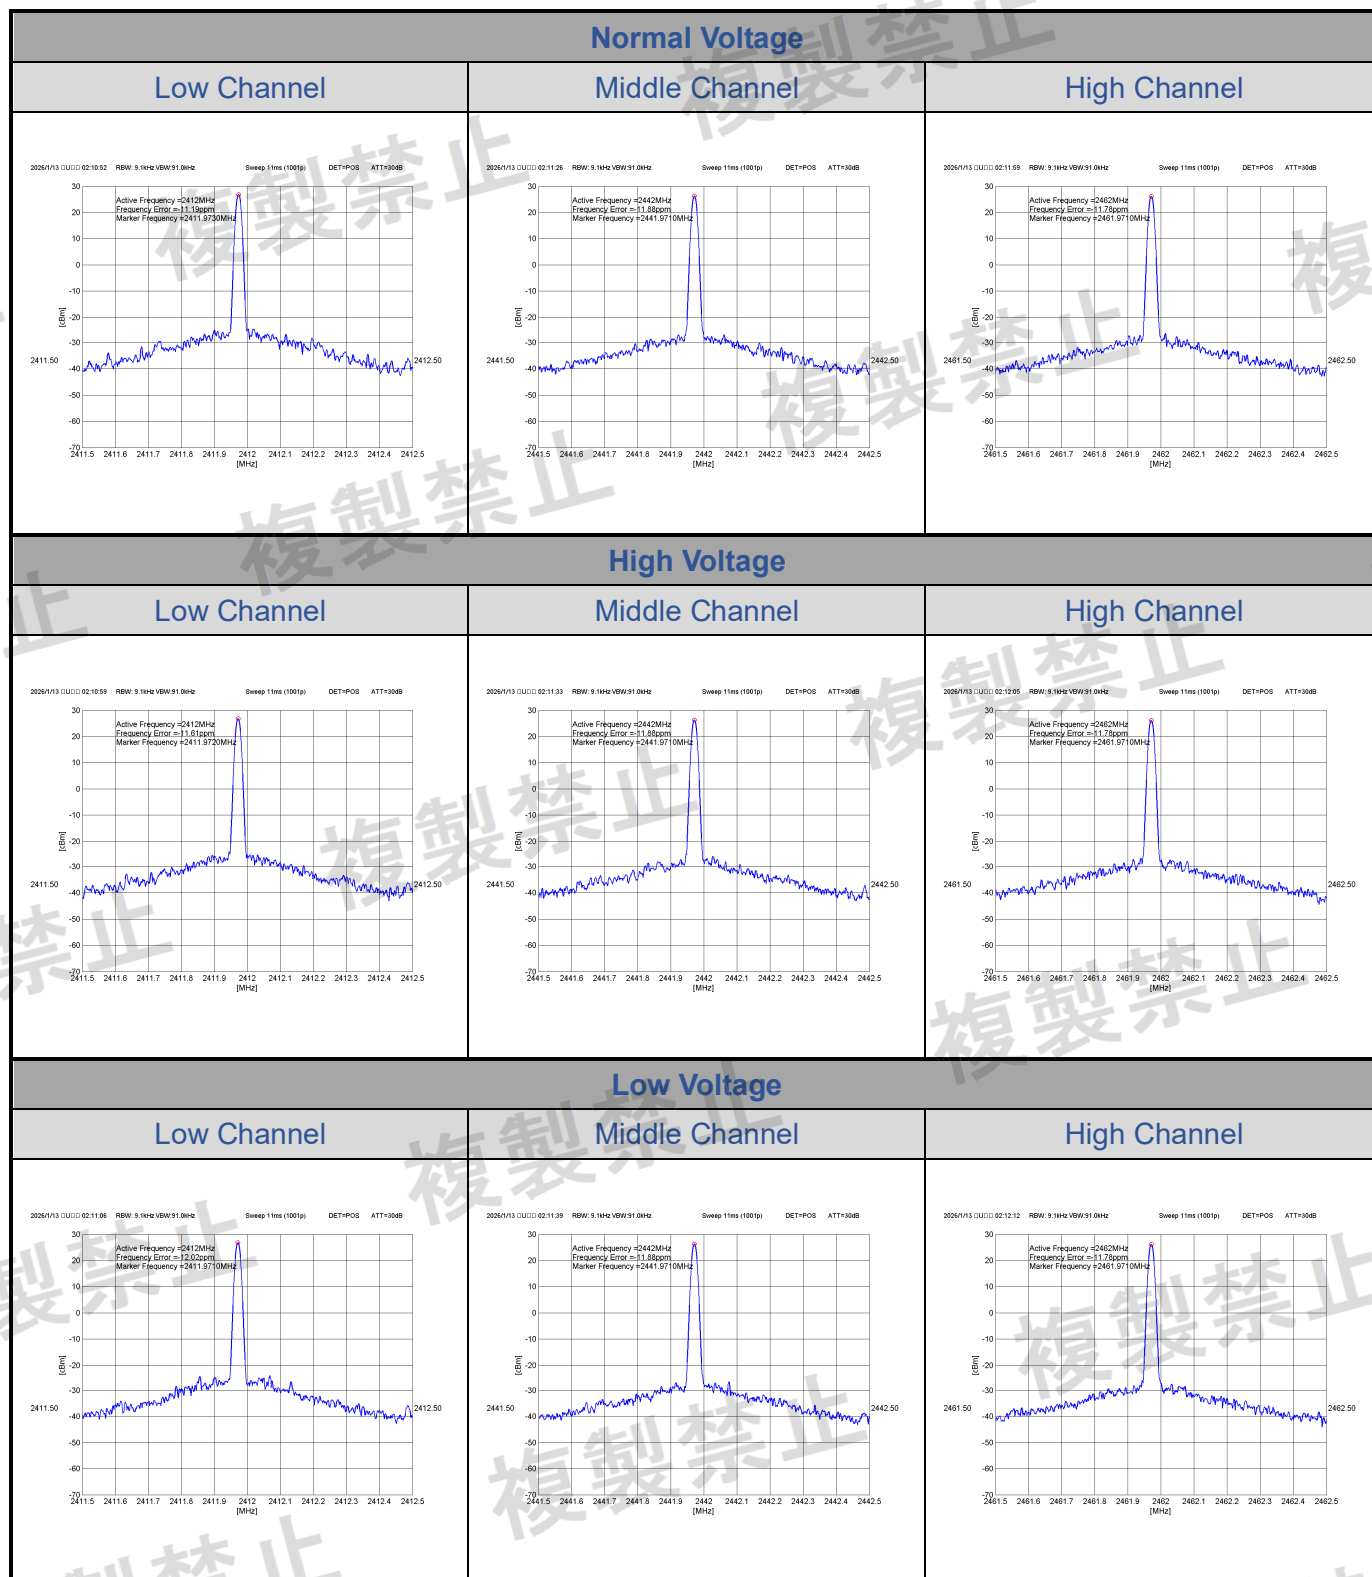


802.11n HT20:2TX

<Chain 1>

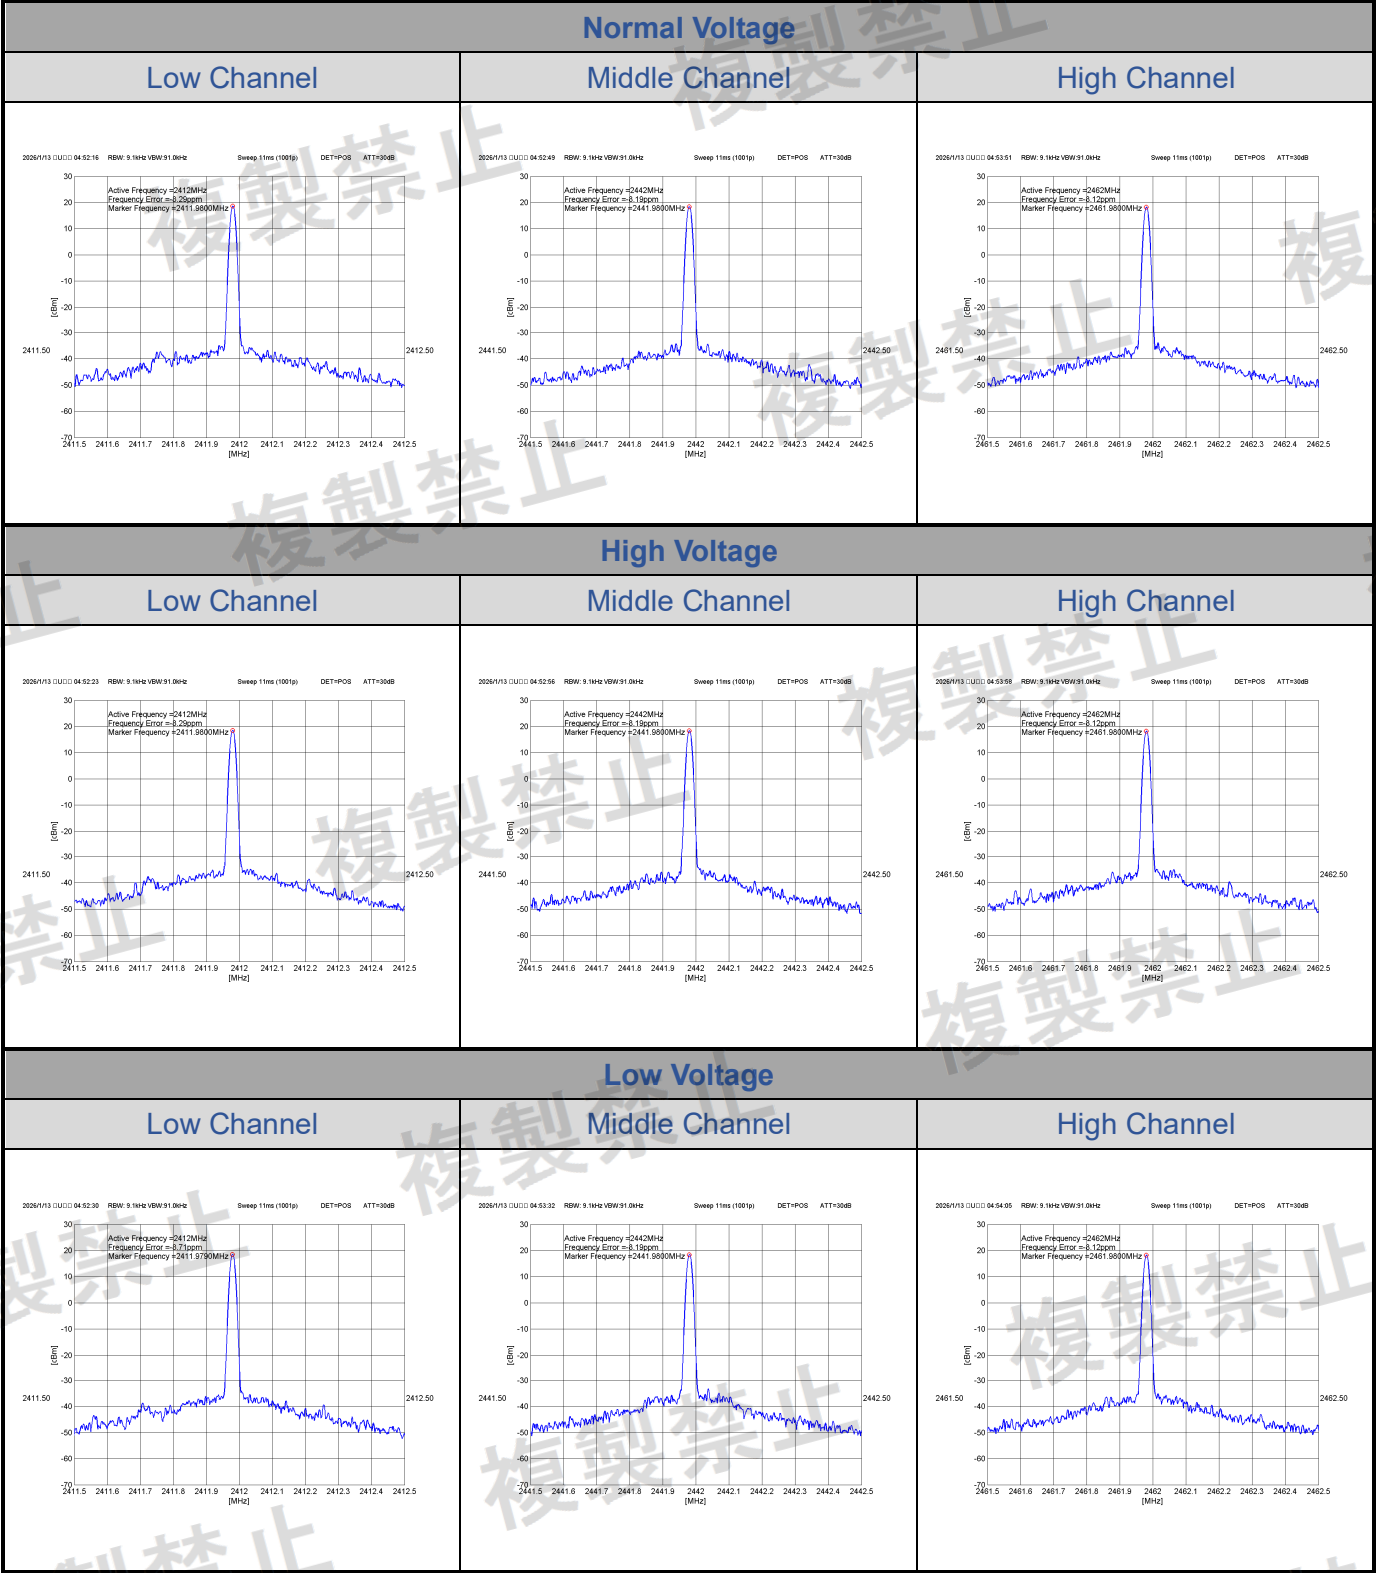


802.11n HT40:2TX

<Chain 0>

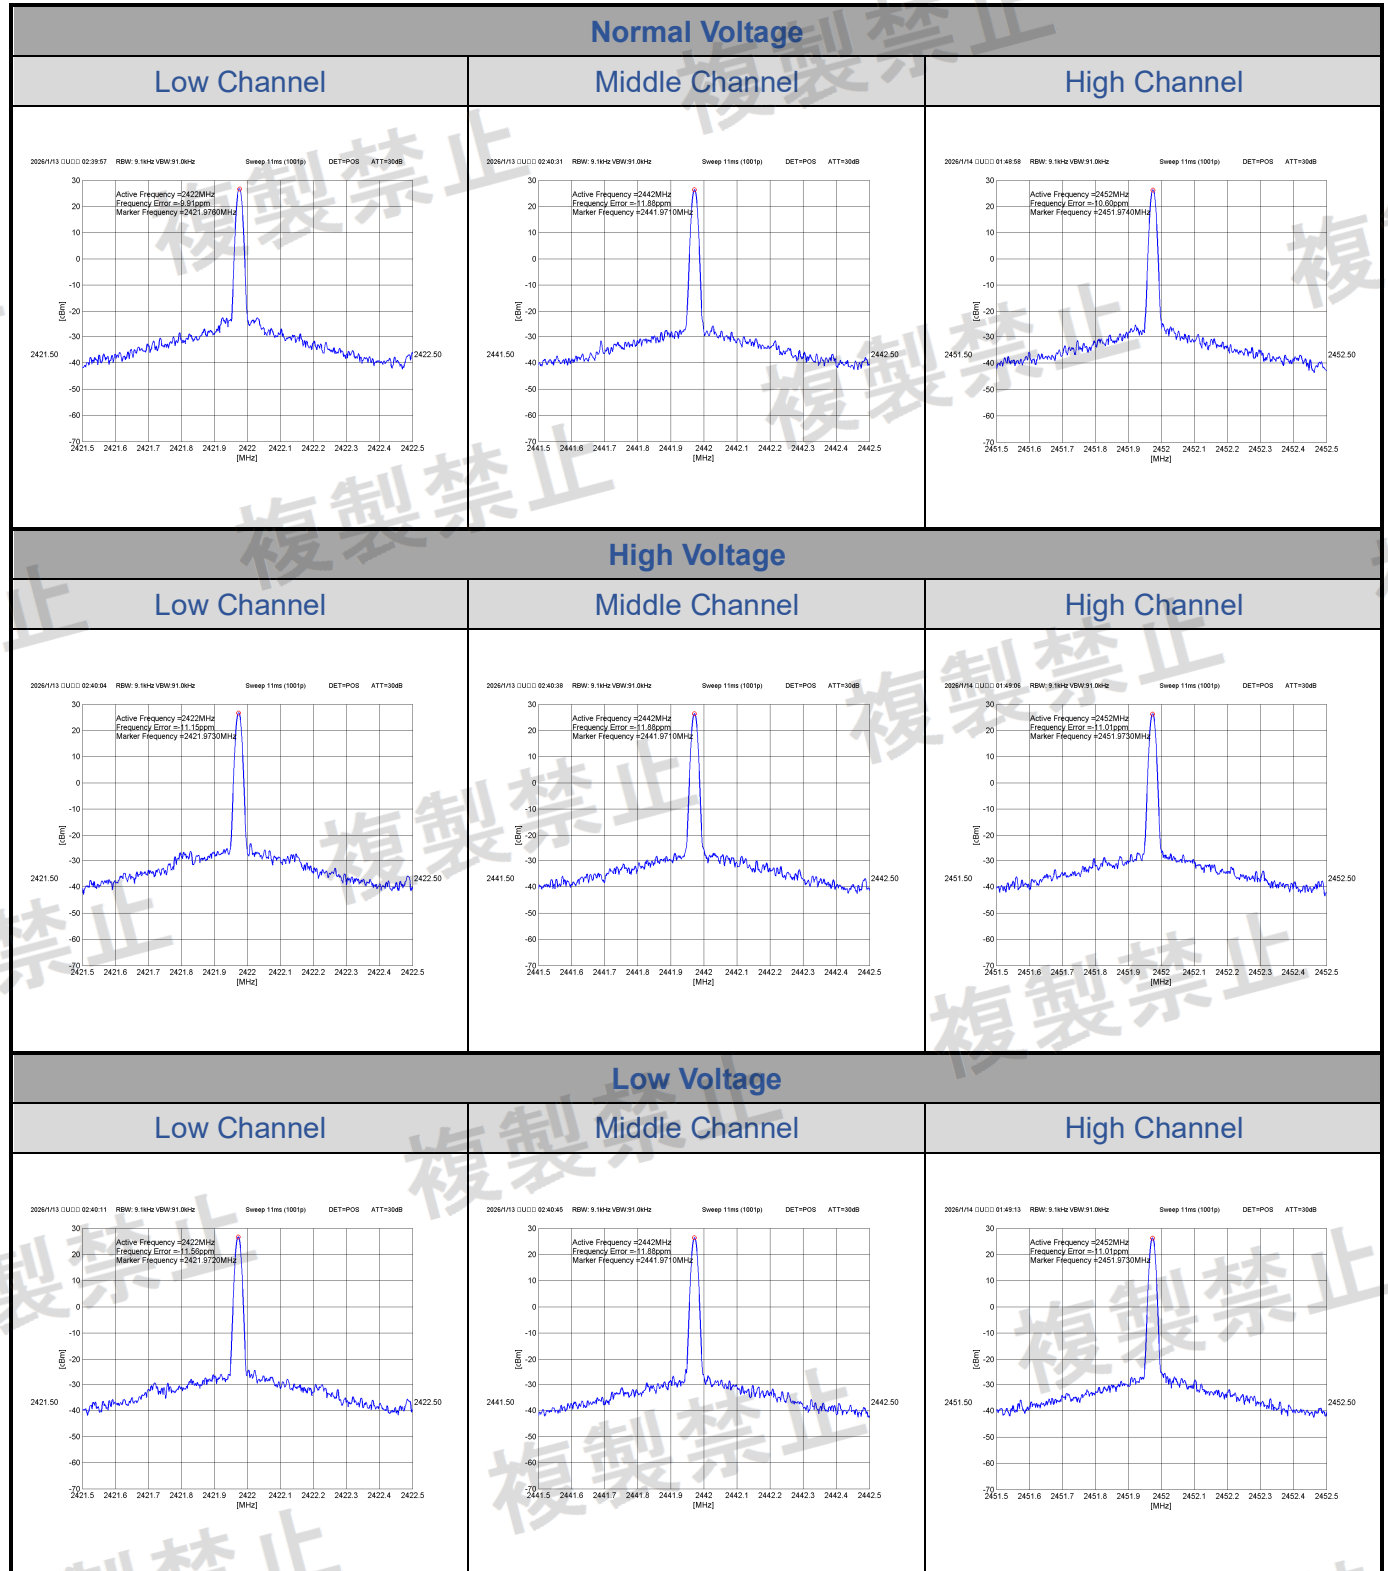

802.11n HT40:2TX

<Chain 1>

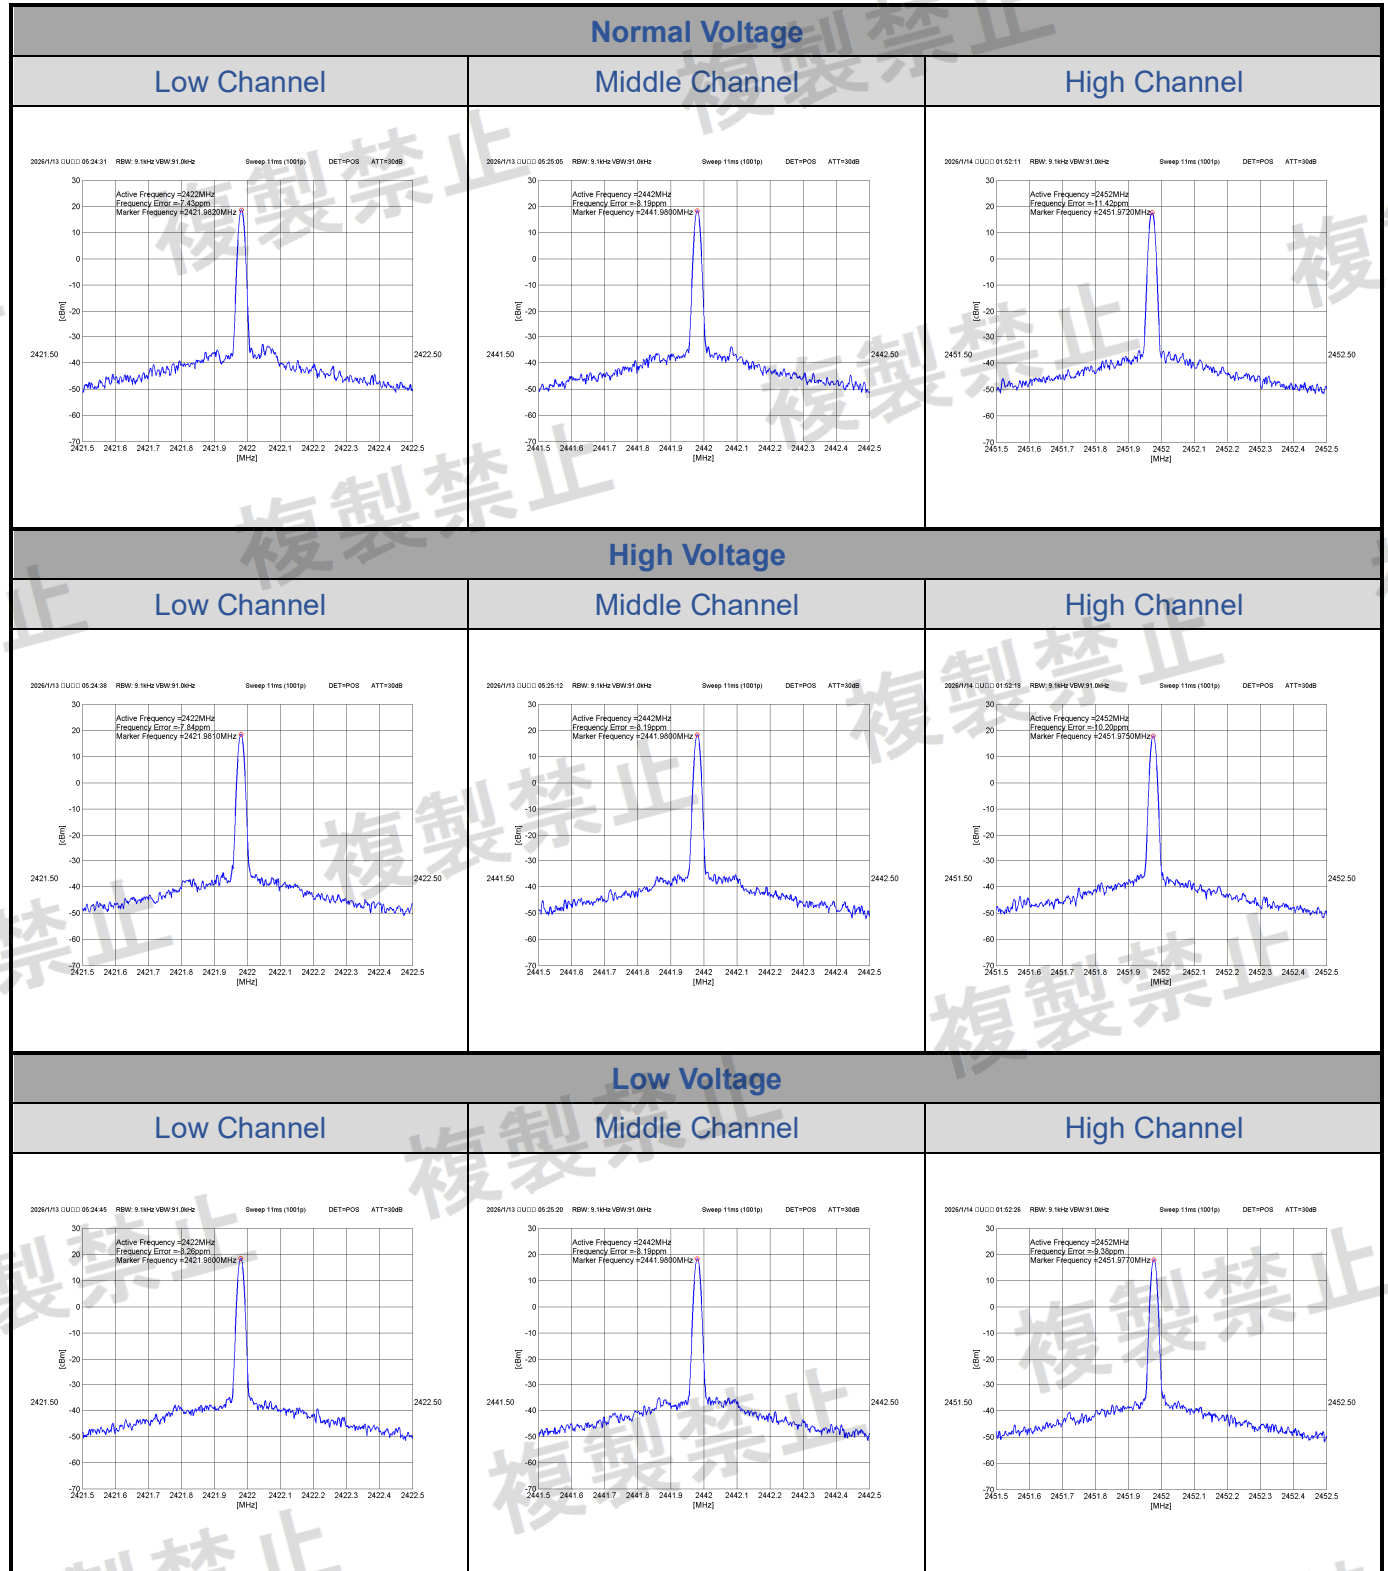


WiFi 2.4G Test Data

CN26VTXQ 001

Test Plots of Occupied Bandwidth (99% Power Bandwidth)


802.11b:2TX

<Chain 0>

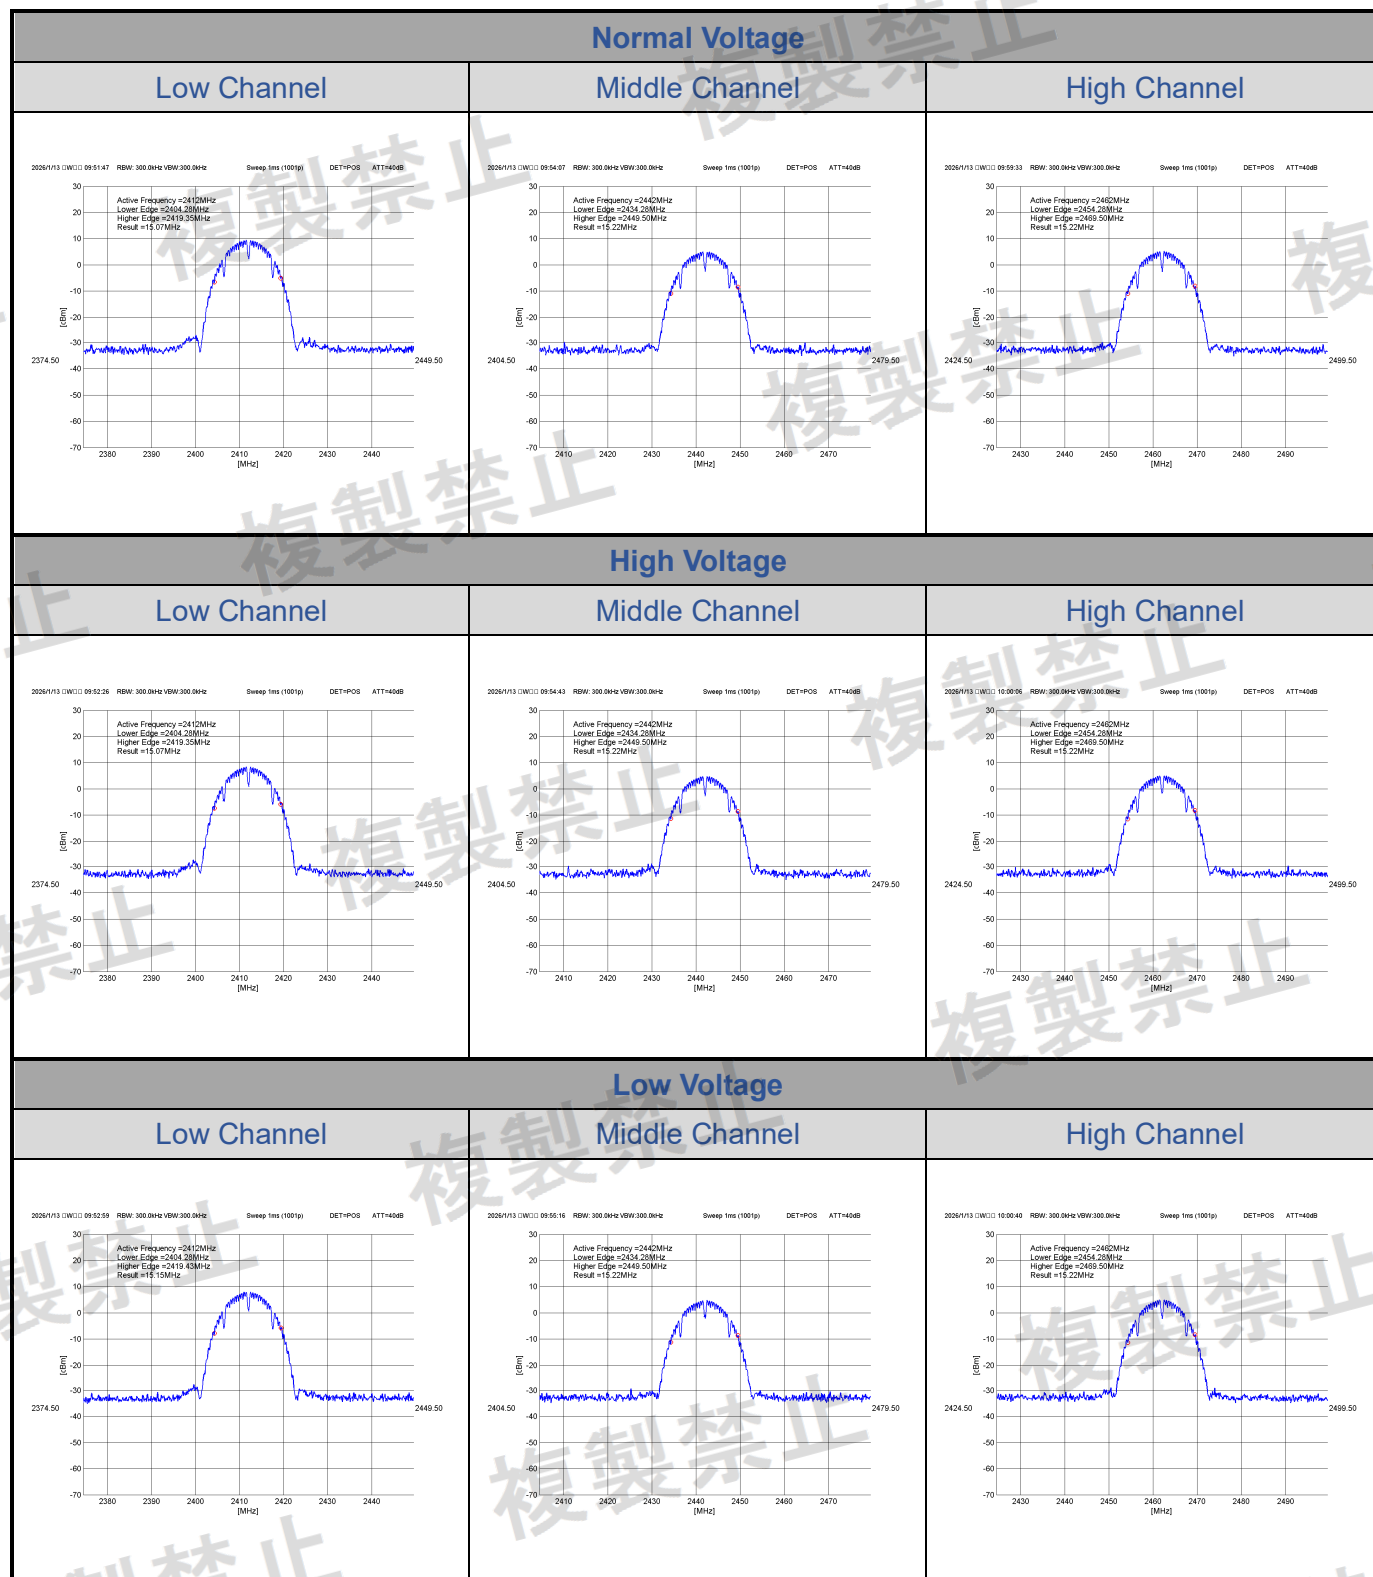


802.11b:2TX

<Chain 1>

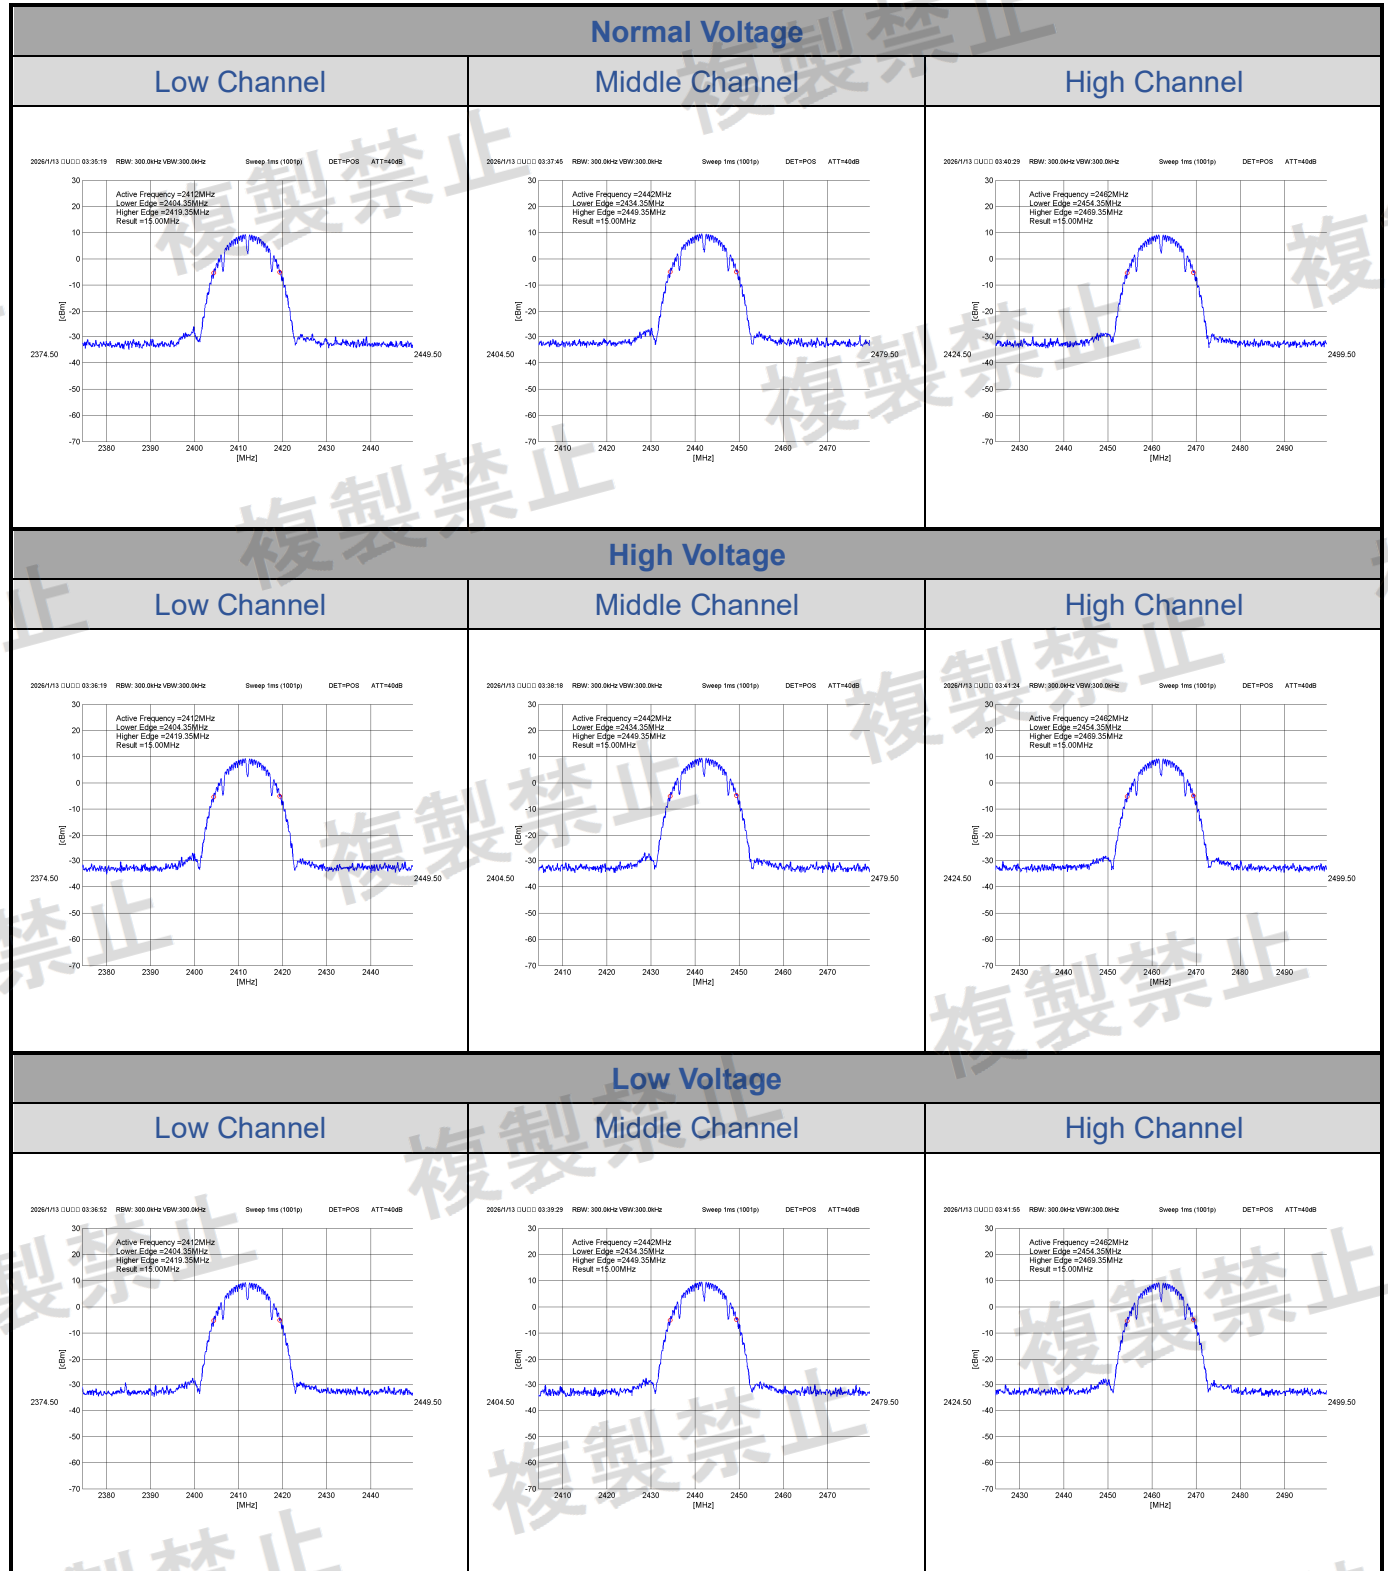


802.11g:2TX

<Chain 0>

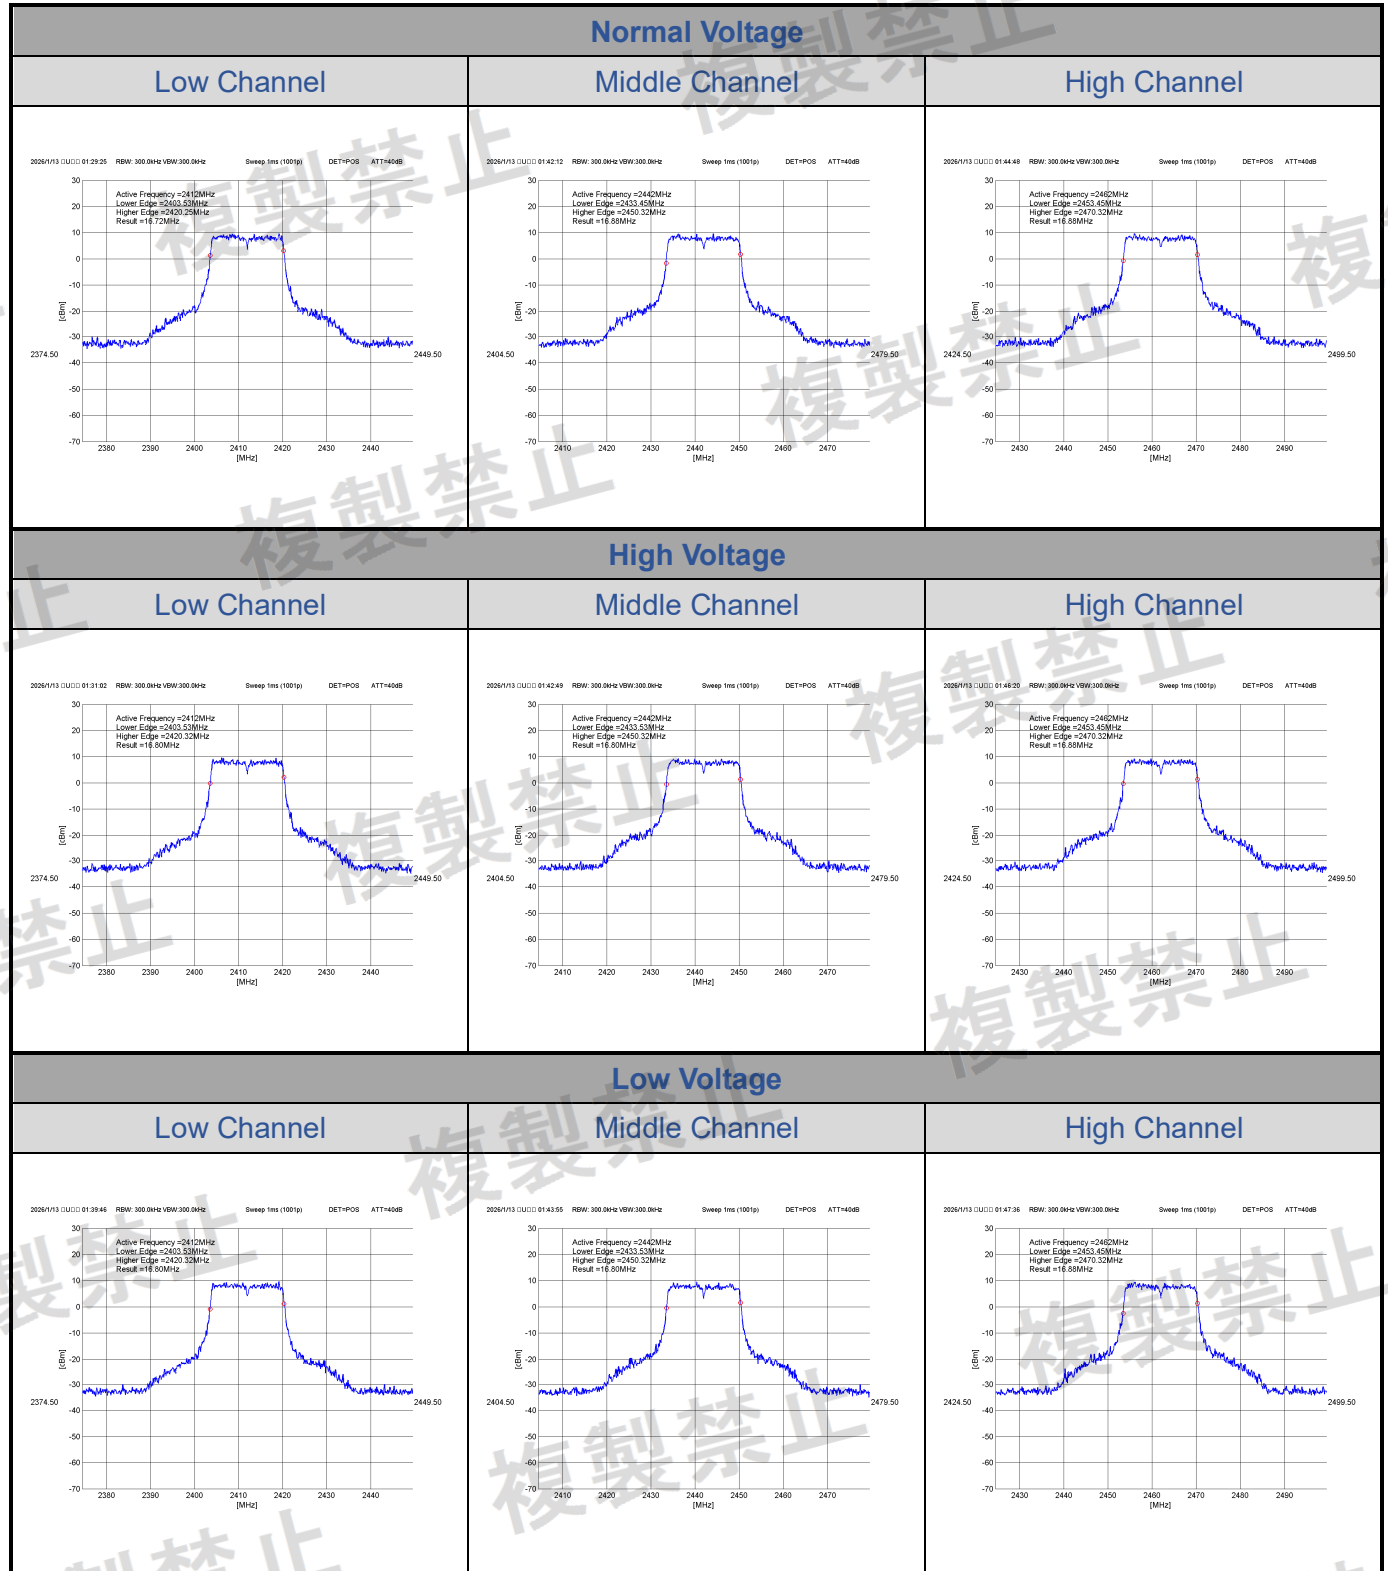

802.11g:2TX

<Chain 1>

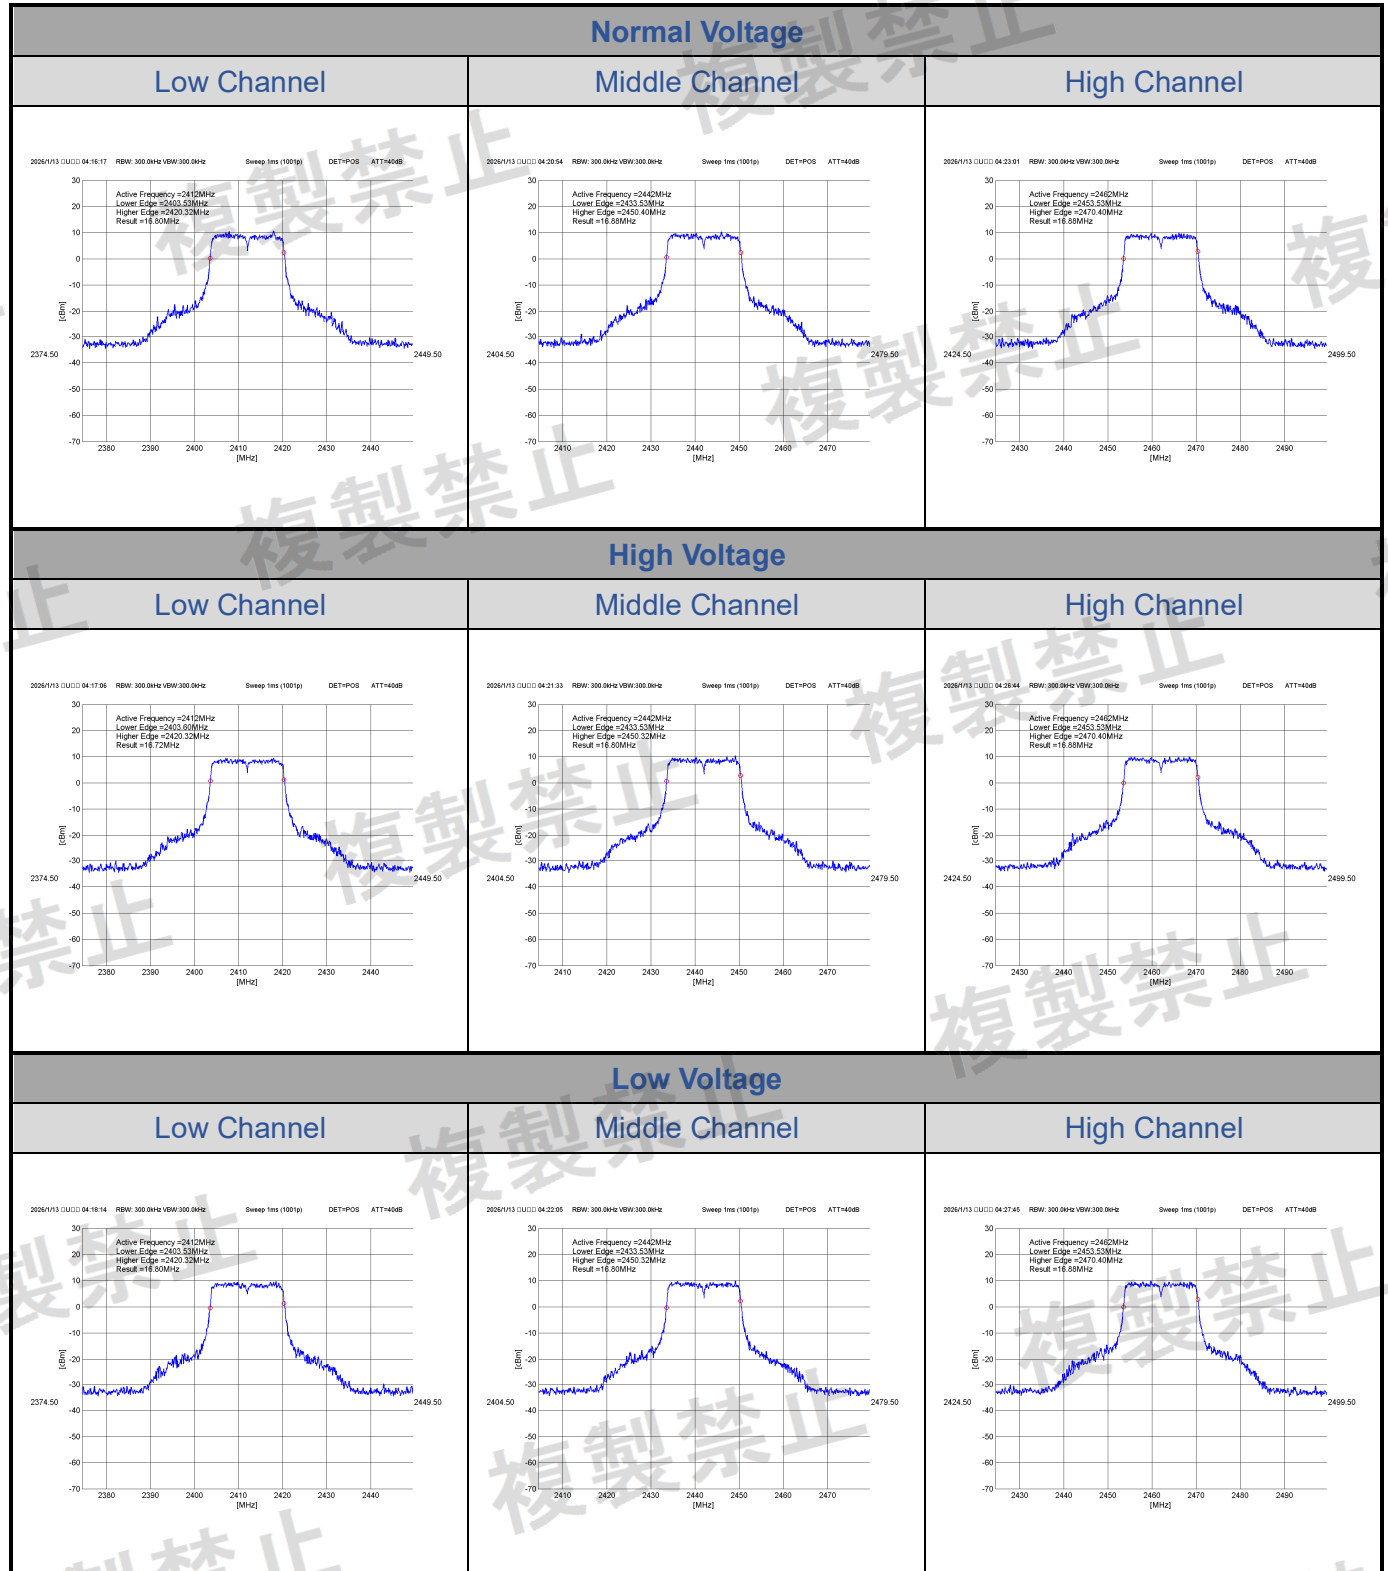


WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT20:2TX

<Chain 0>

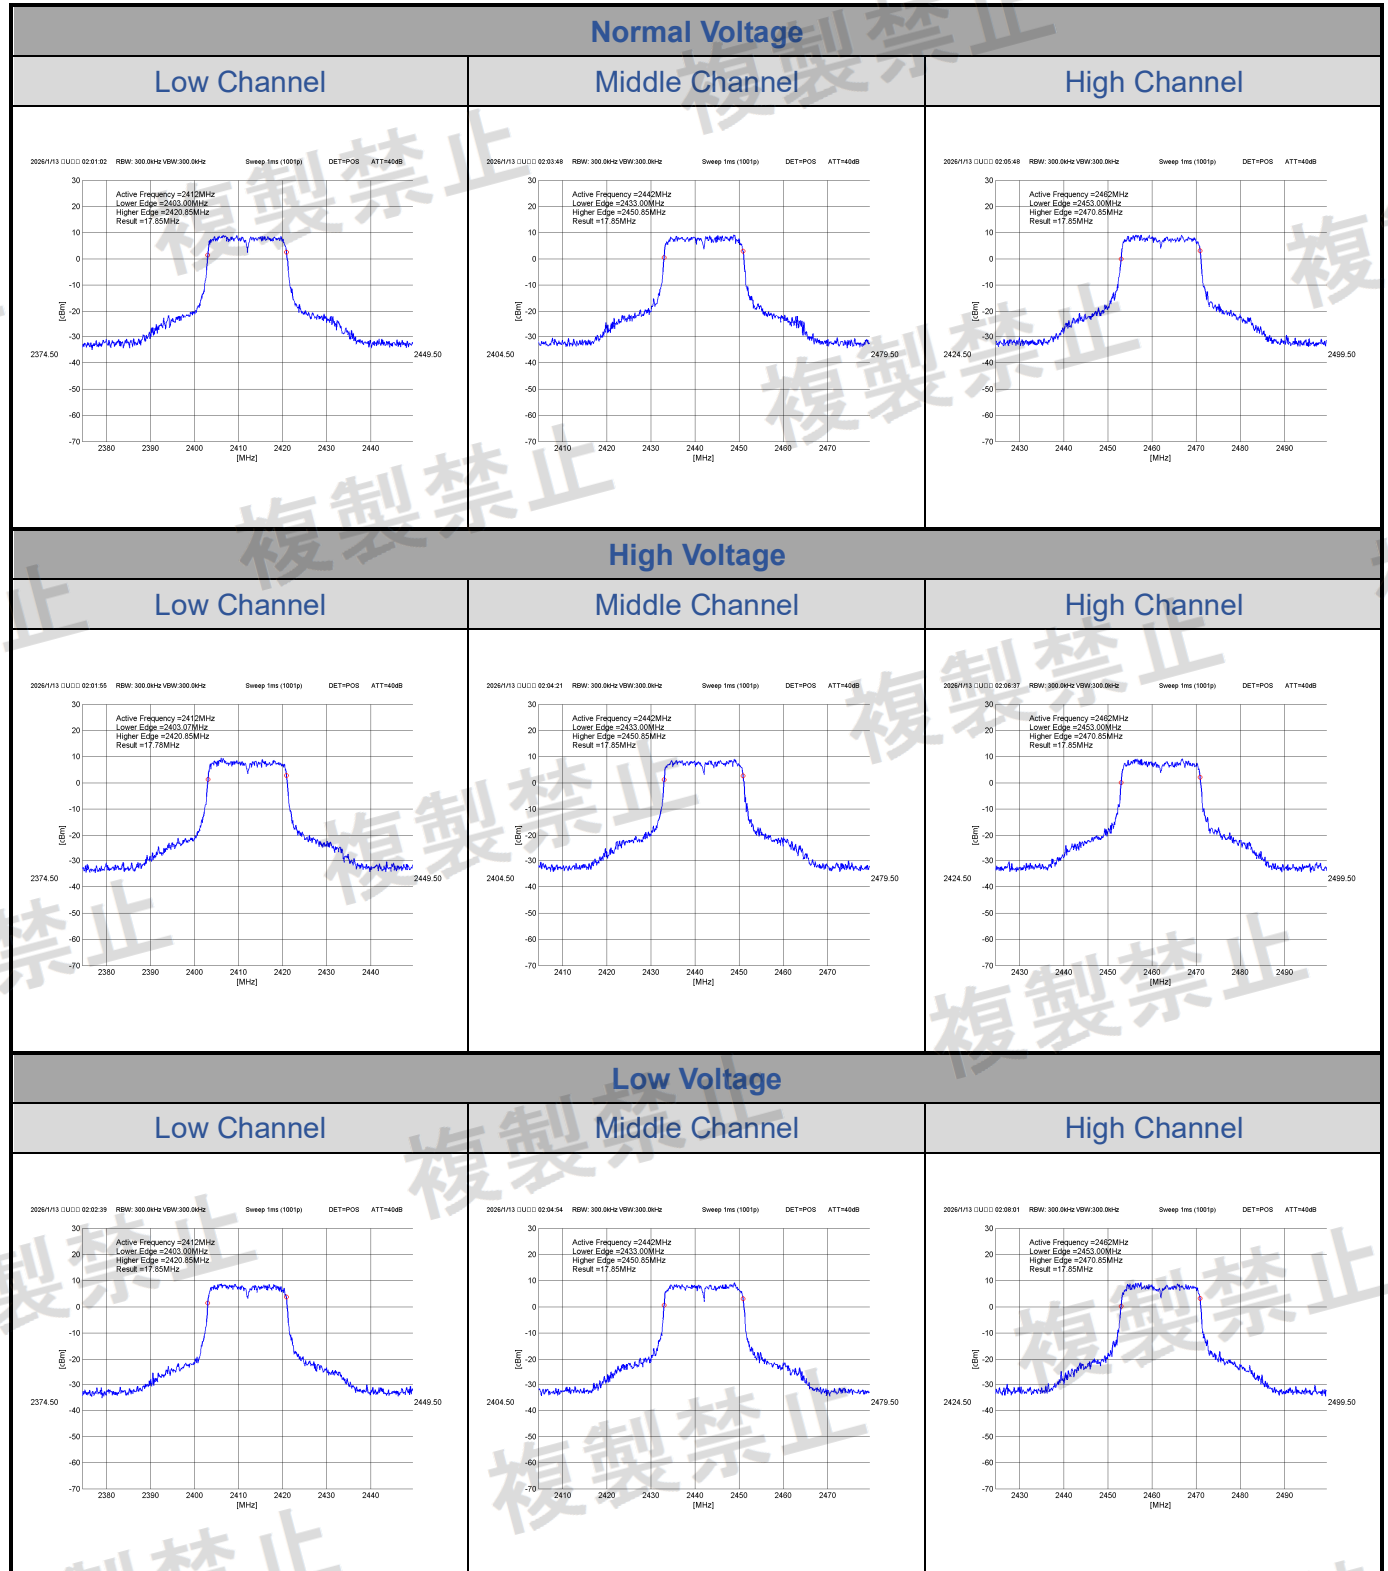


WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT20:2TX

<Chain 1>

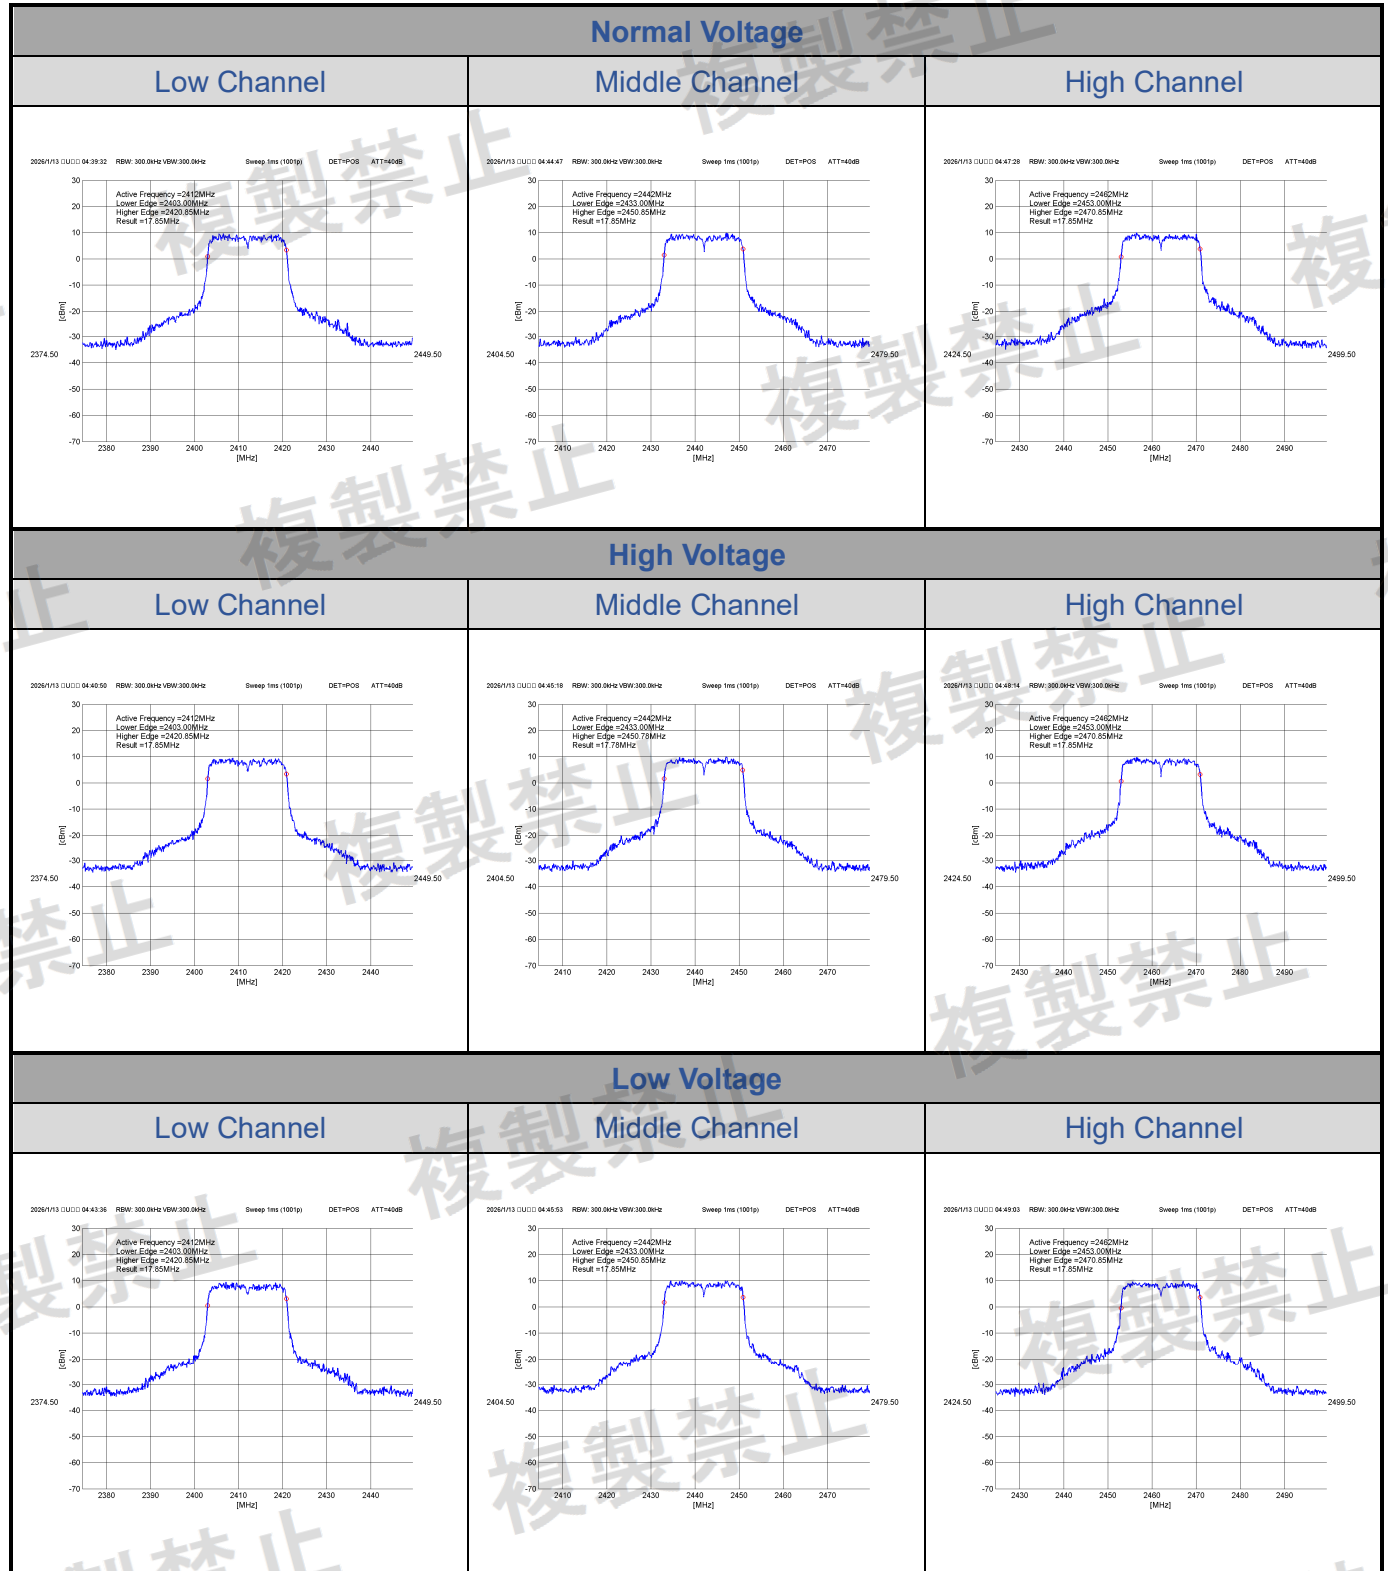


WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT40:2TX

<Chain 0>

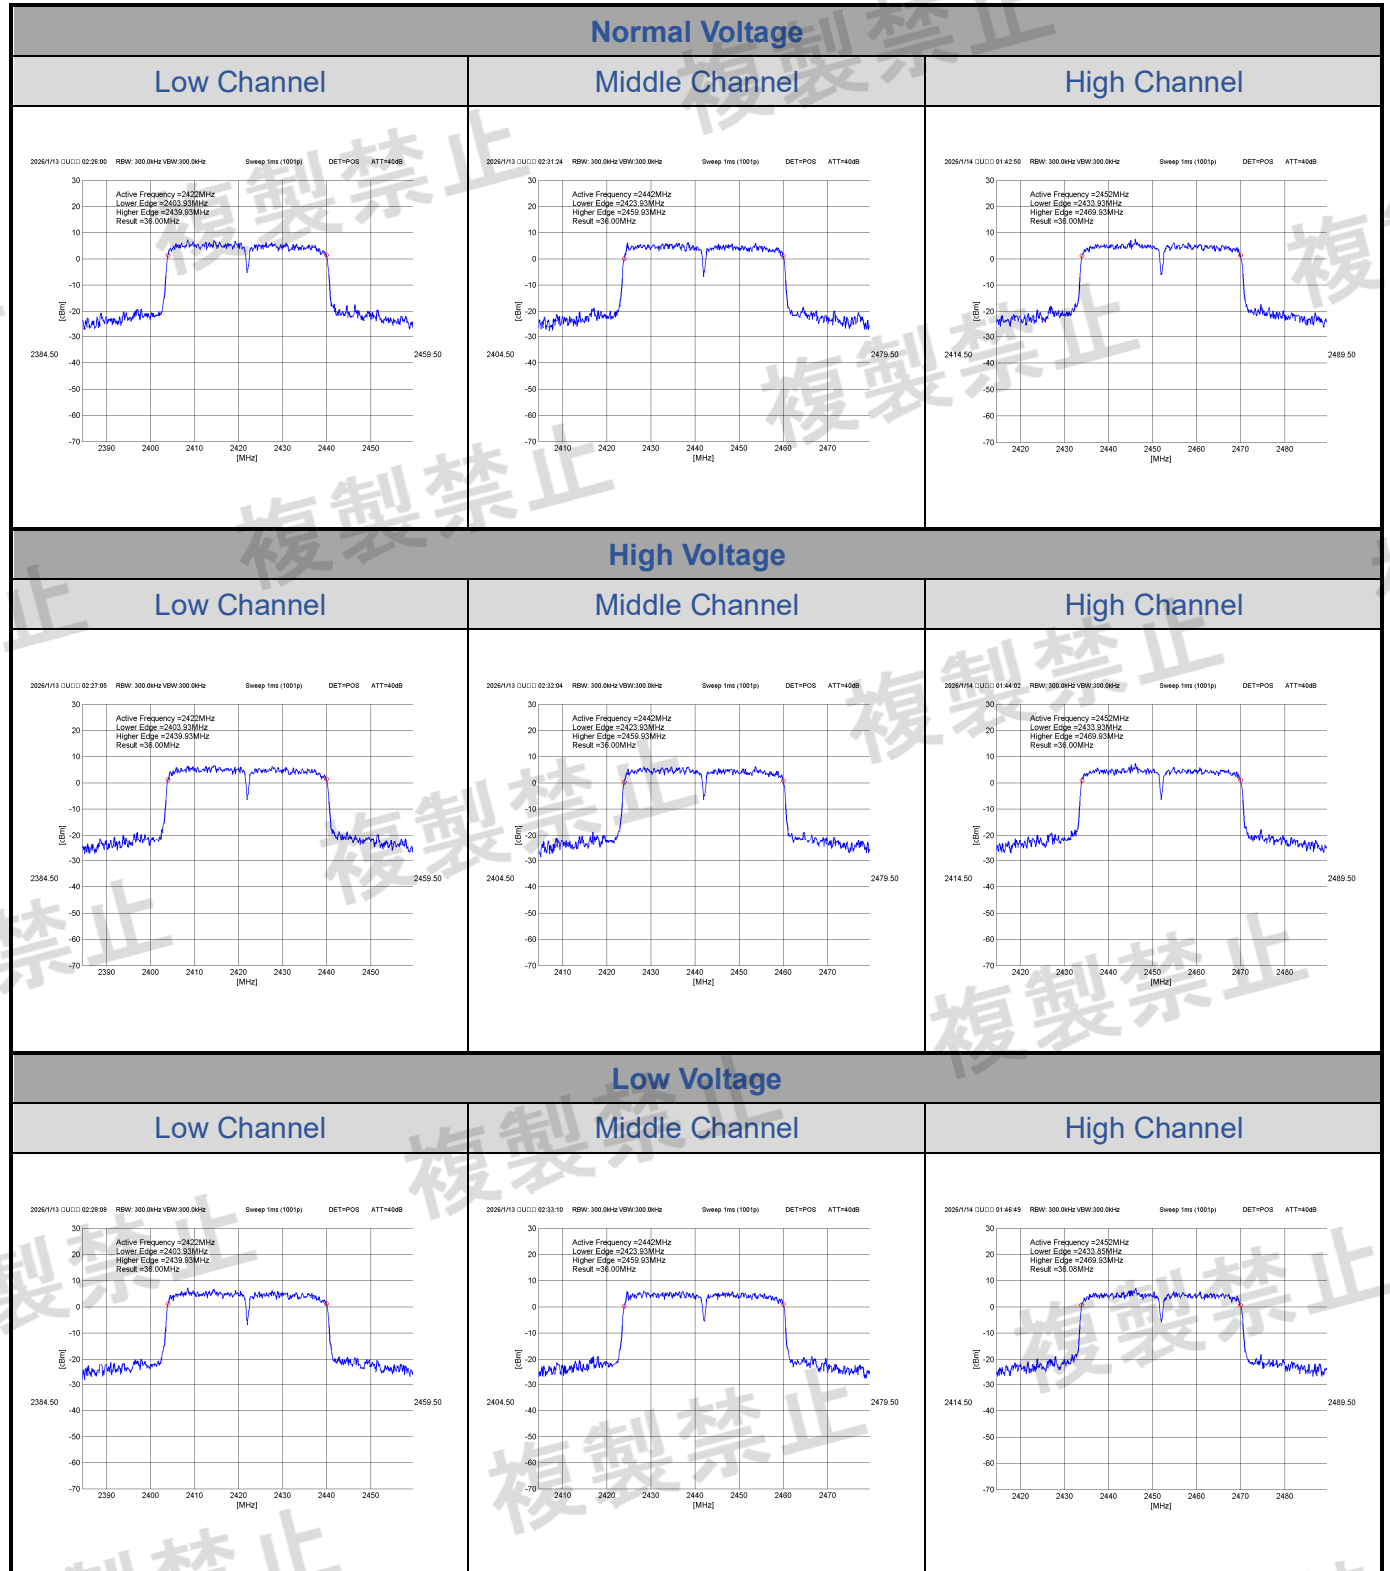


WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT40:2TX


<Chain 1>

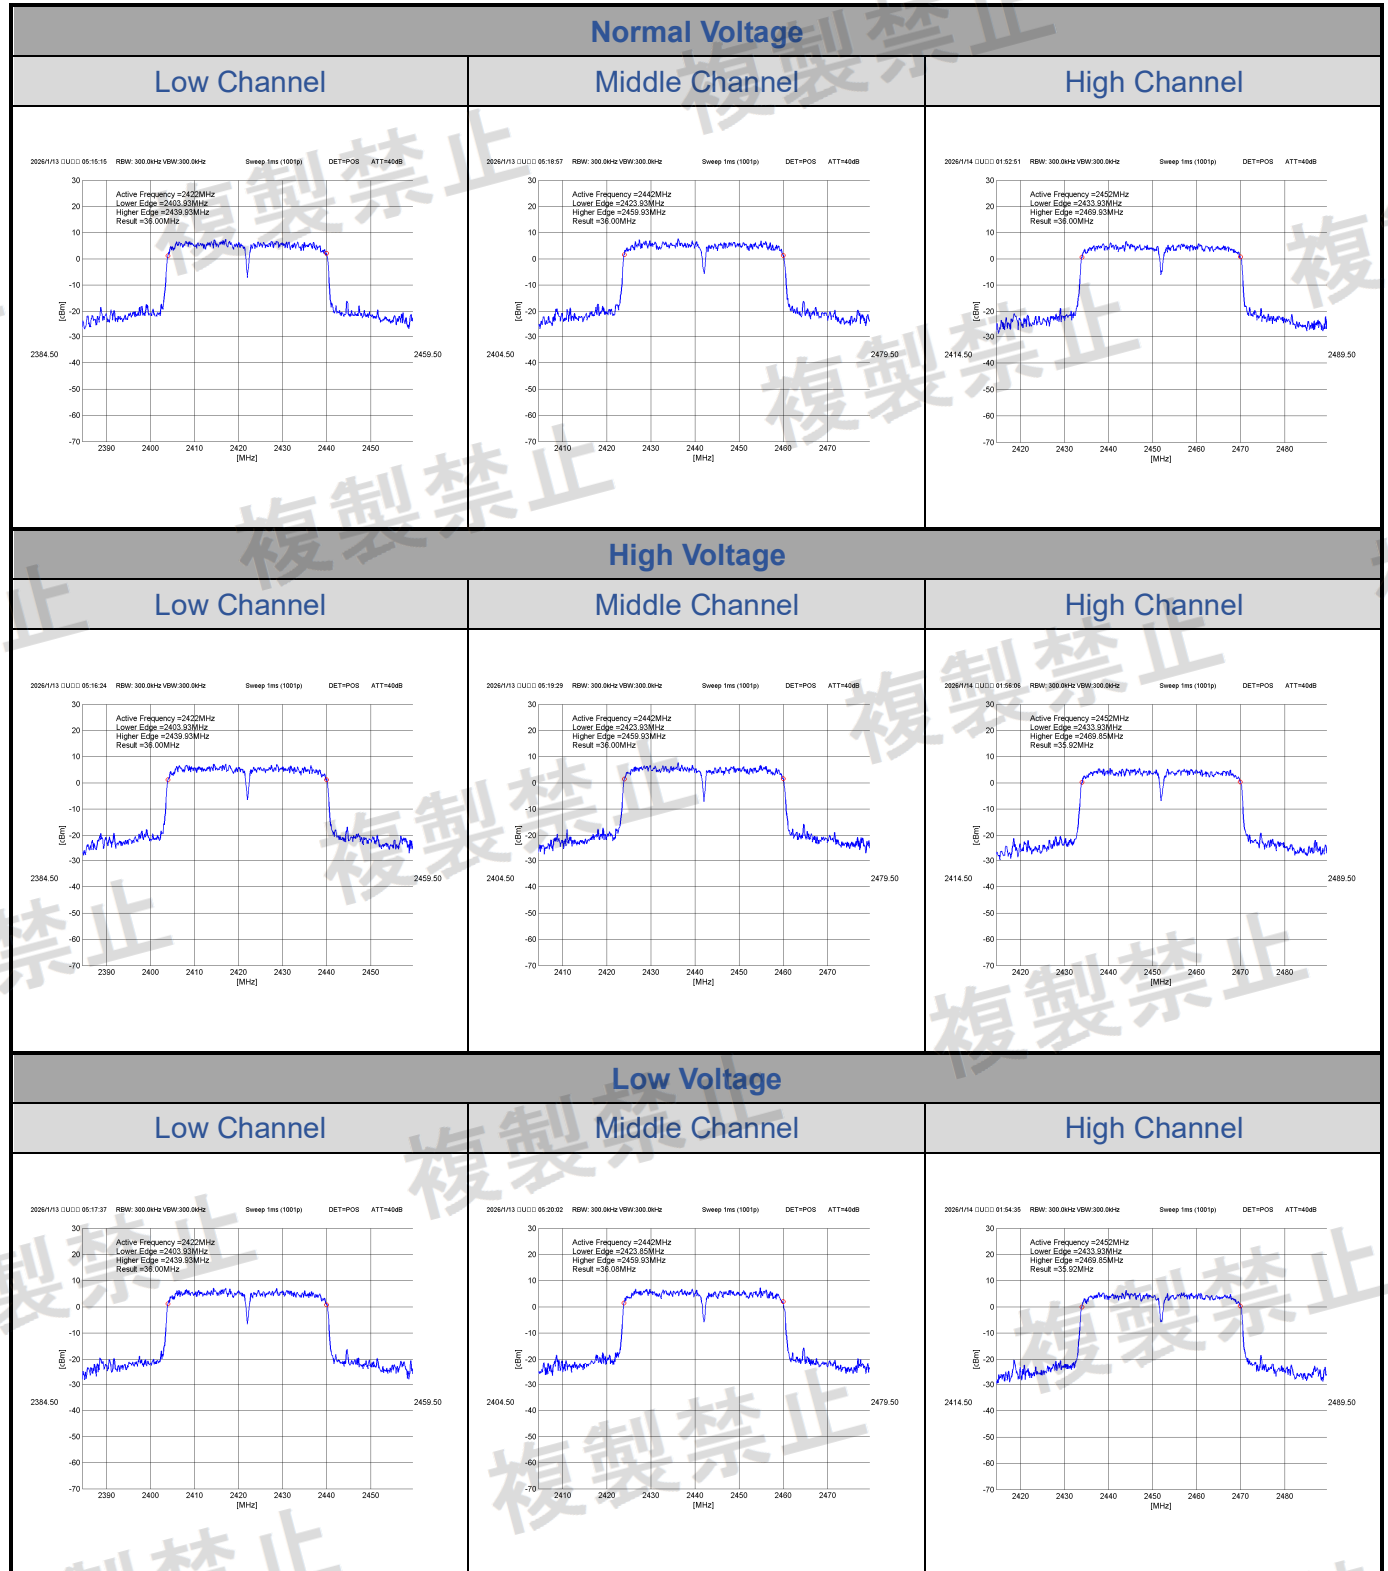

Test Plots of Occupied Bandwidth (90% Power Bandwidth)


802.11b:2TX

<Chain 0>

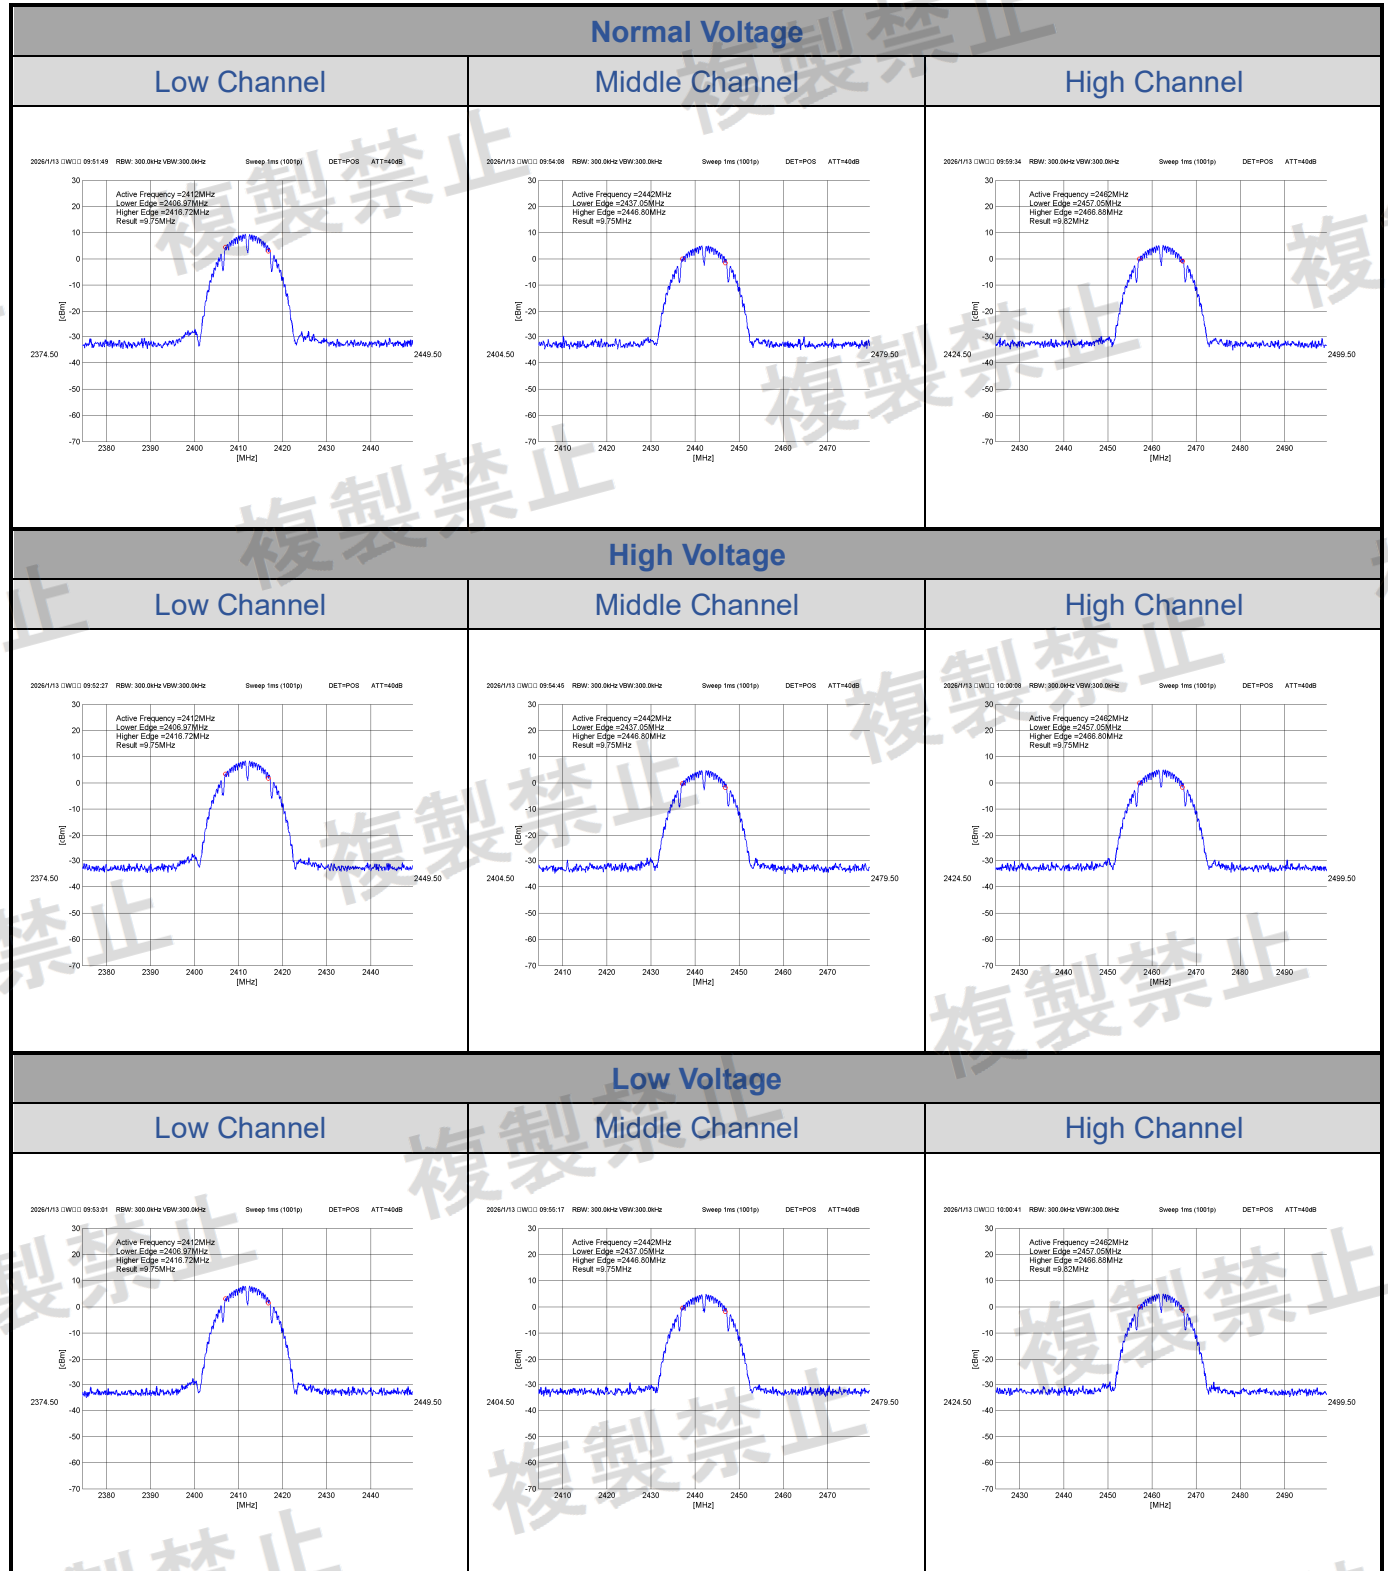

802.11b:2TX

<Chain 1>

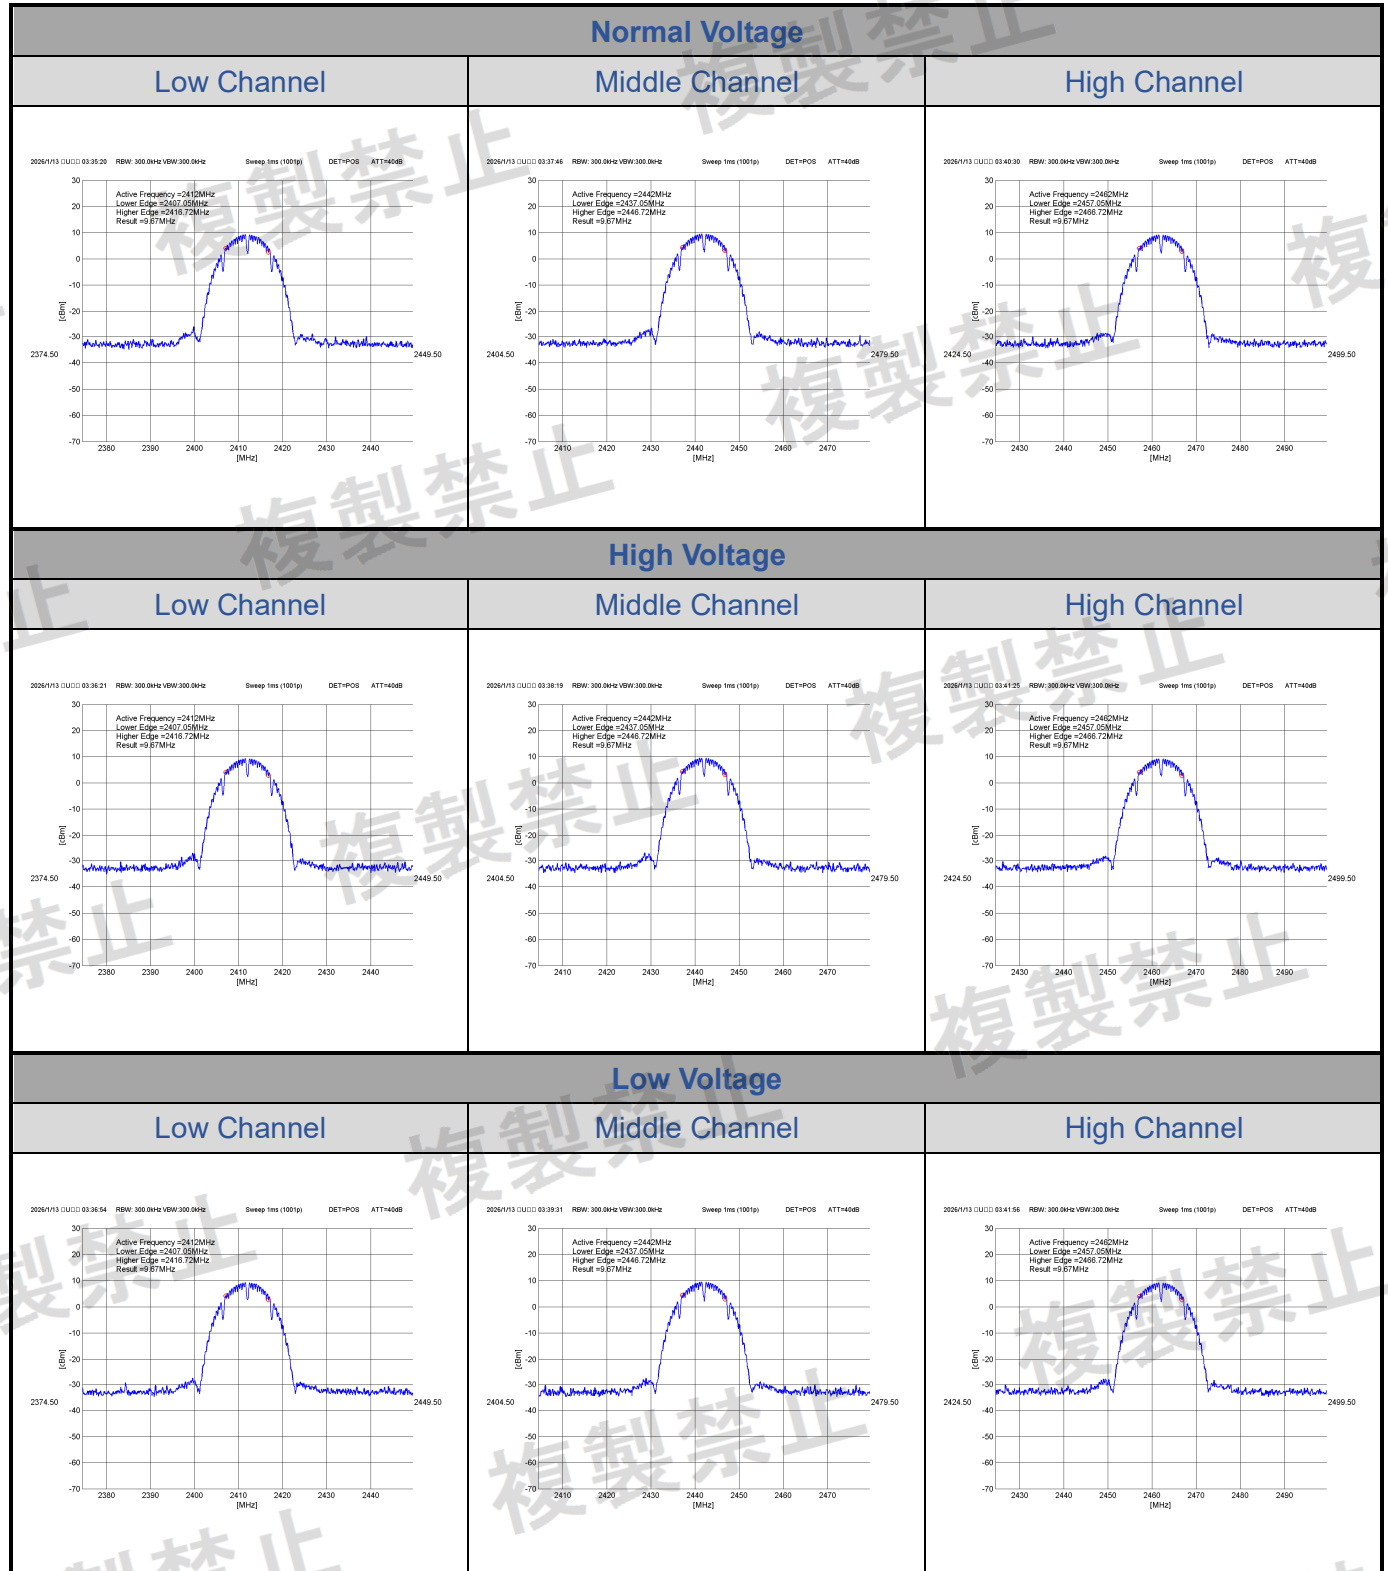


WiFi 2.4G Test Data

CN26VTXQ 001

802.11g:2TX

<Chain 0>

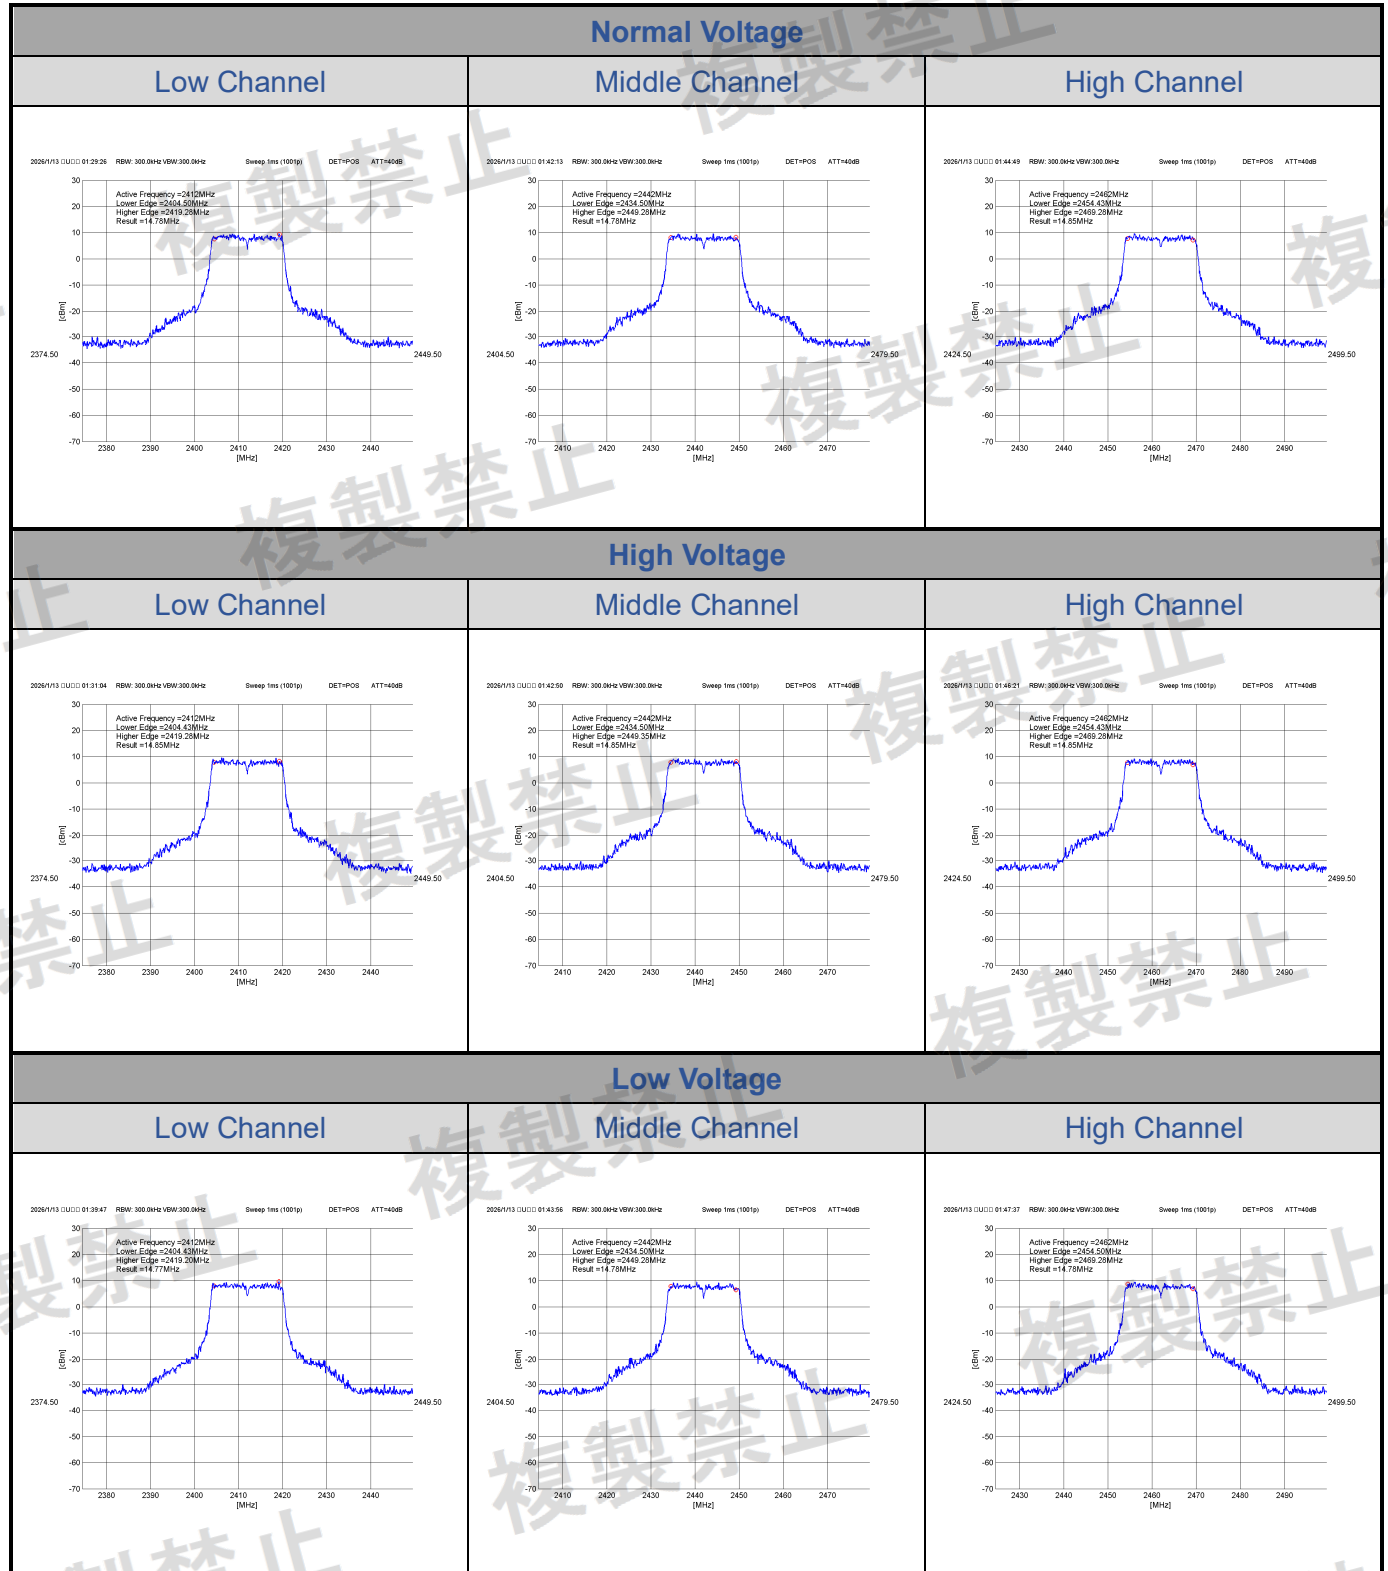


WiFi 2.4G Test Data

CN26VTXQ 001

802.11g:2TX

<Chain 1>

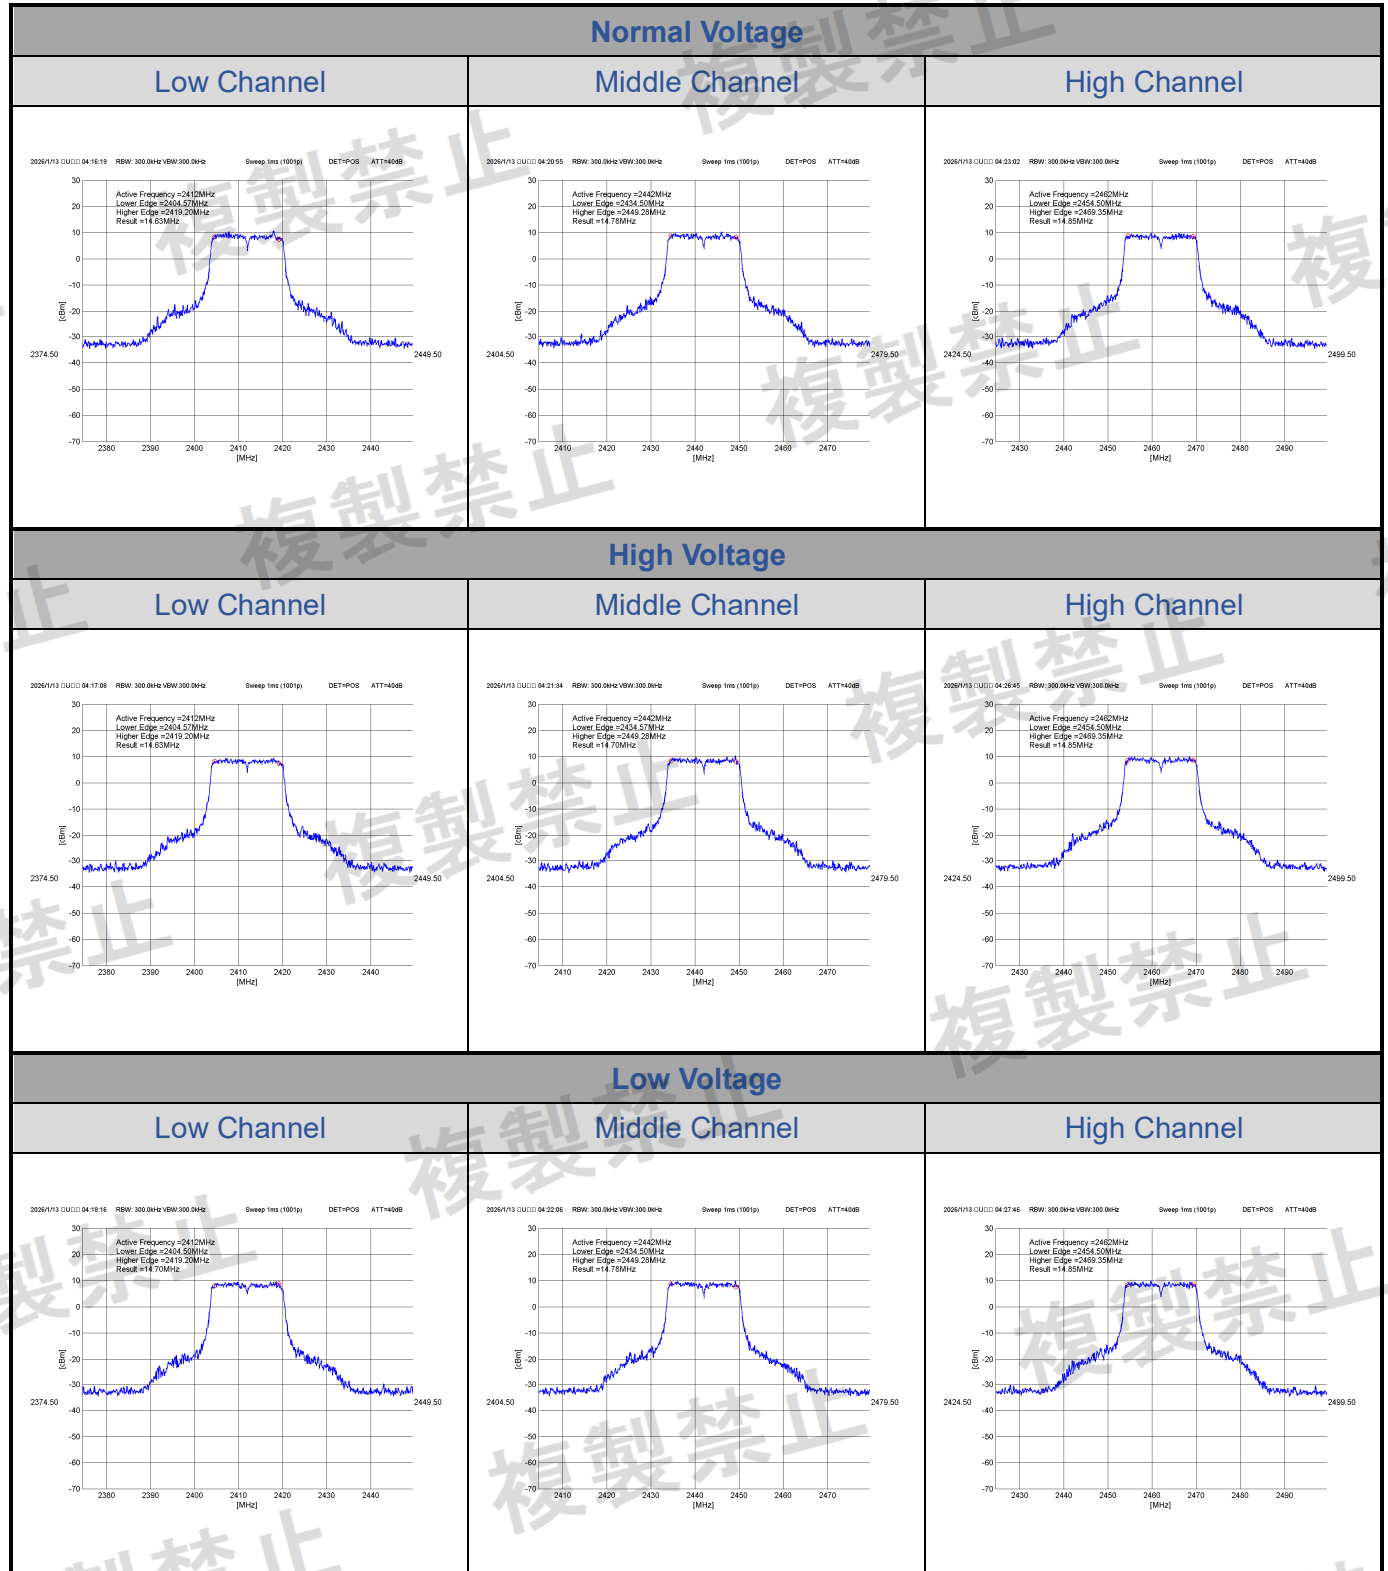


WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT20:2TX

<Chain 0>

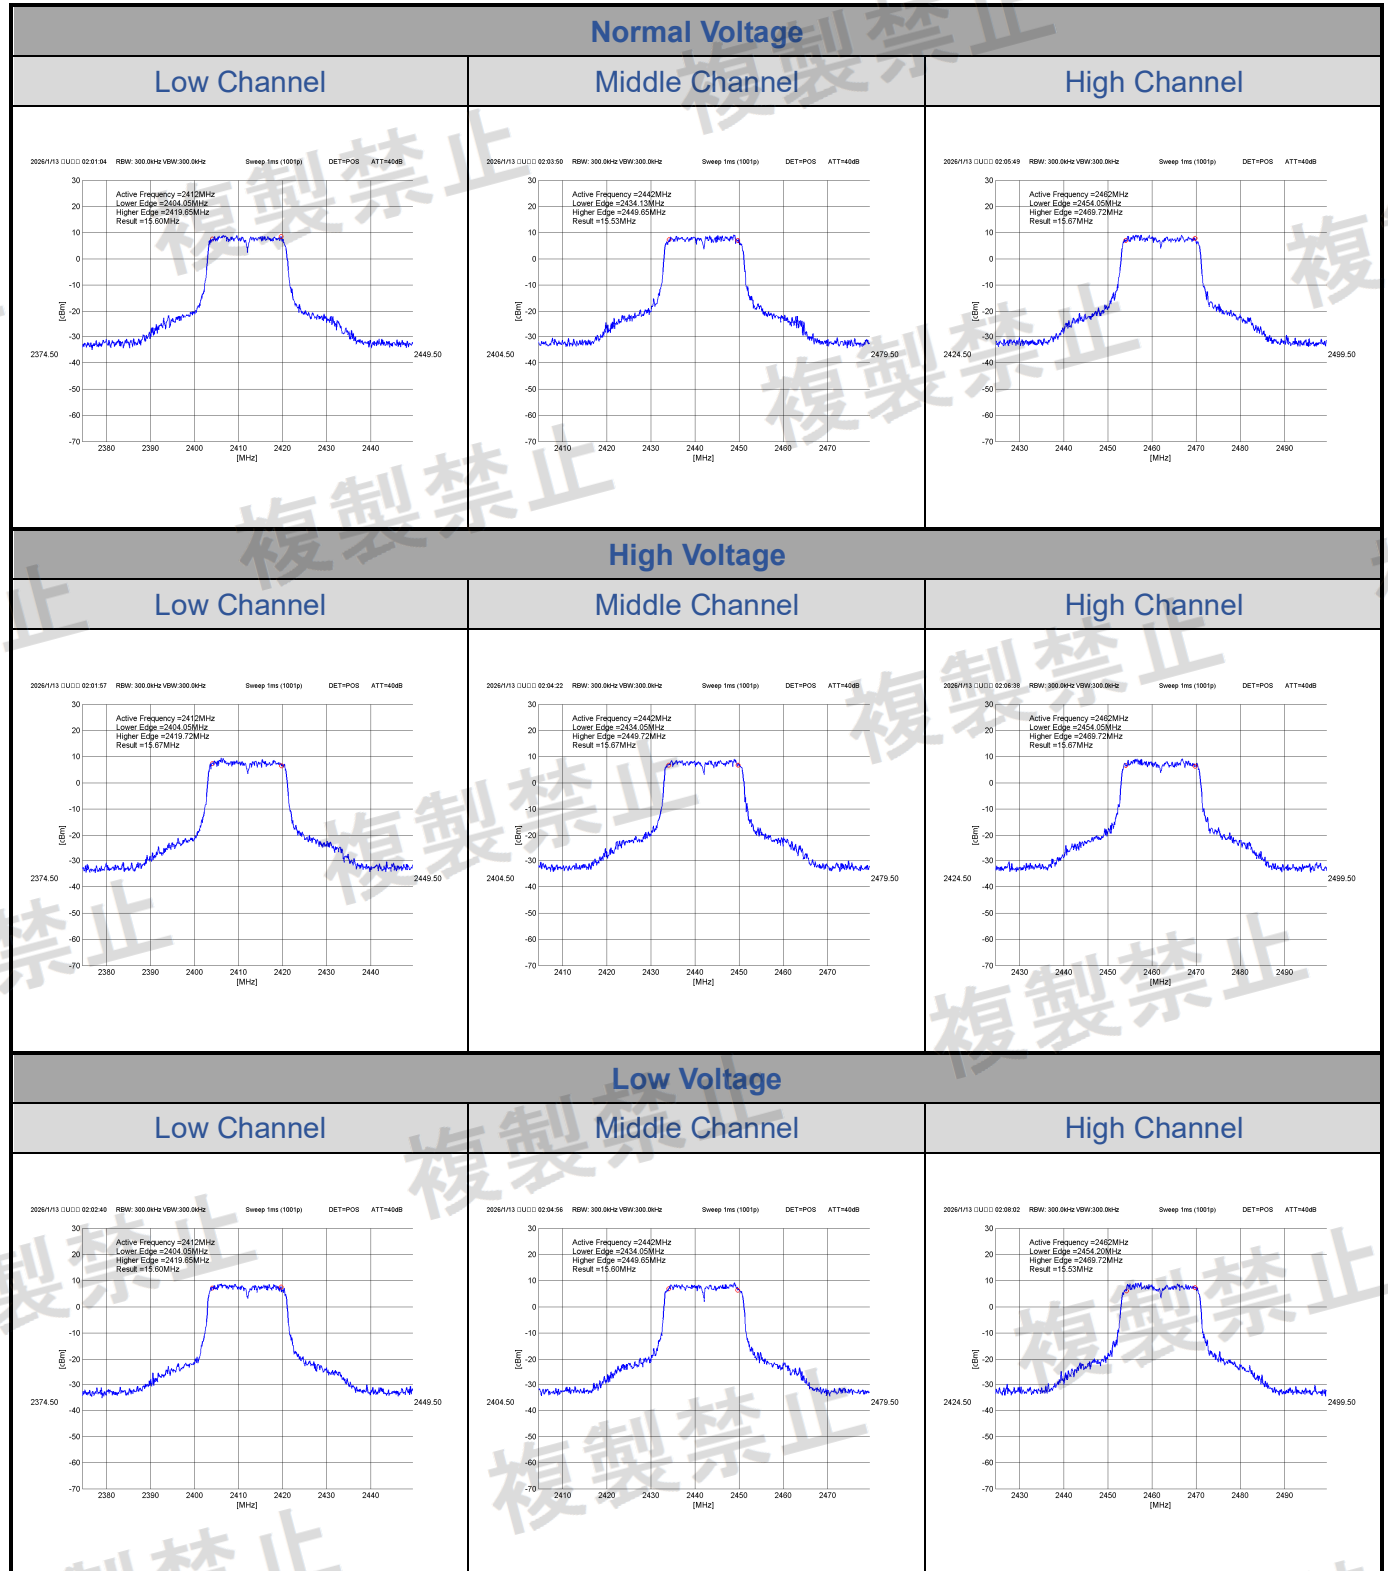


WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT20:2TX

<Chain 1>

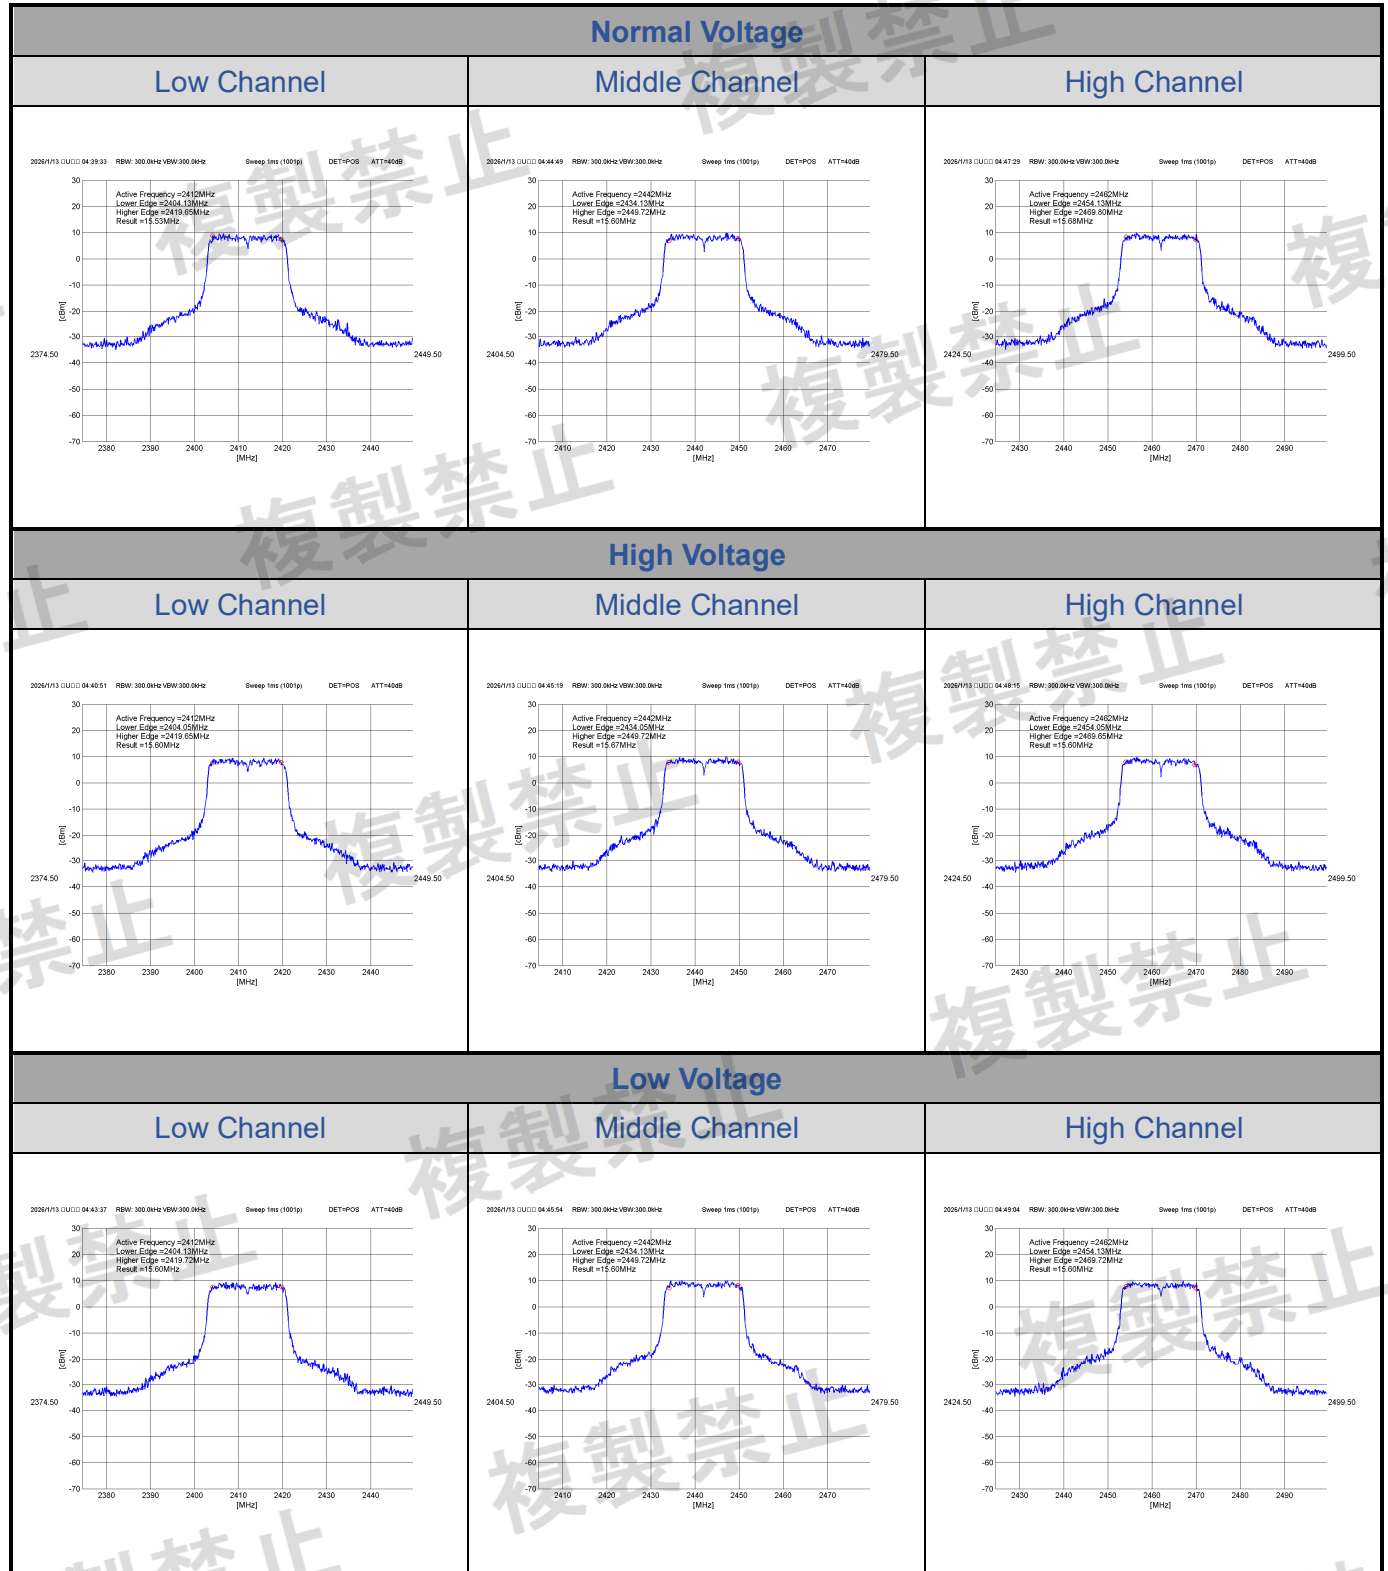


WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT40:2TX

<Chain 0>

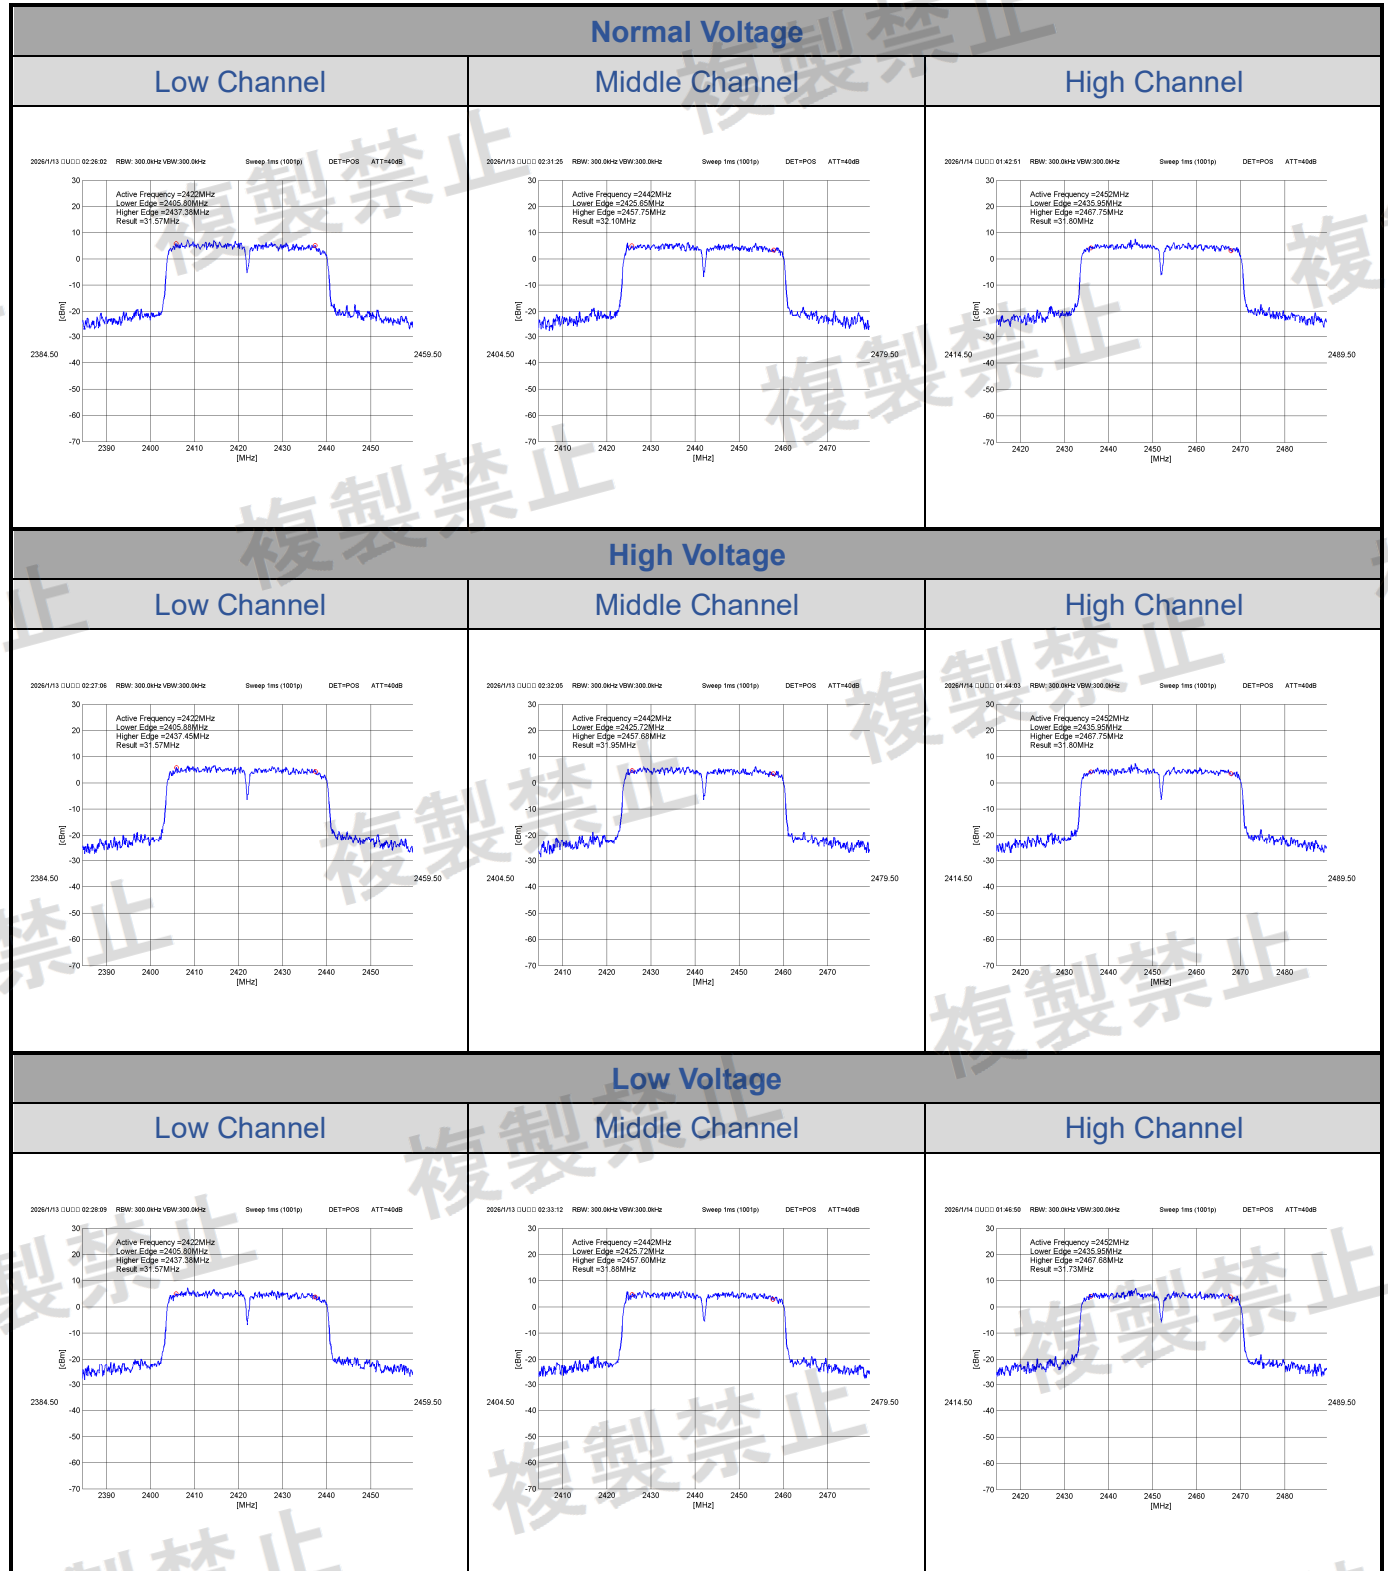


WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT40:2TX

<Chain 1>

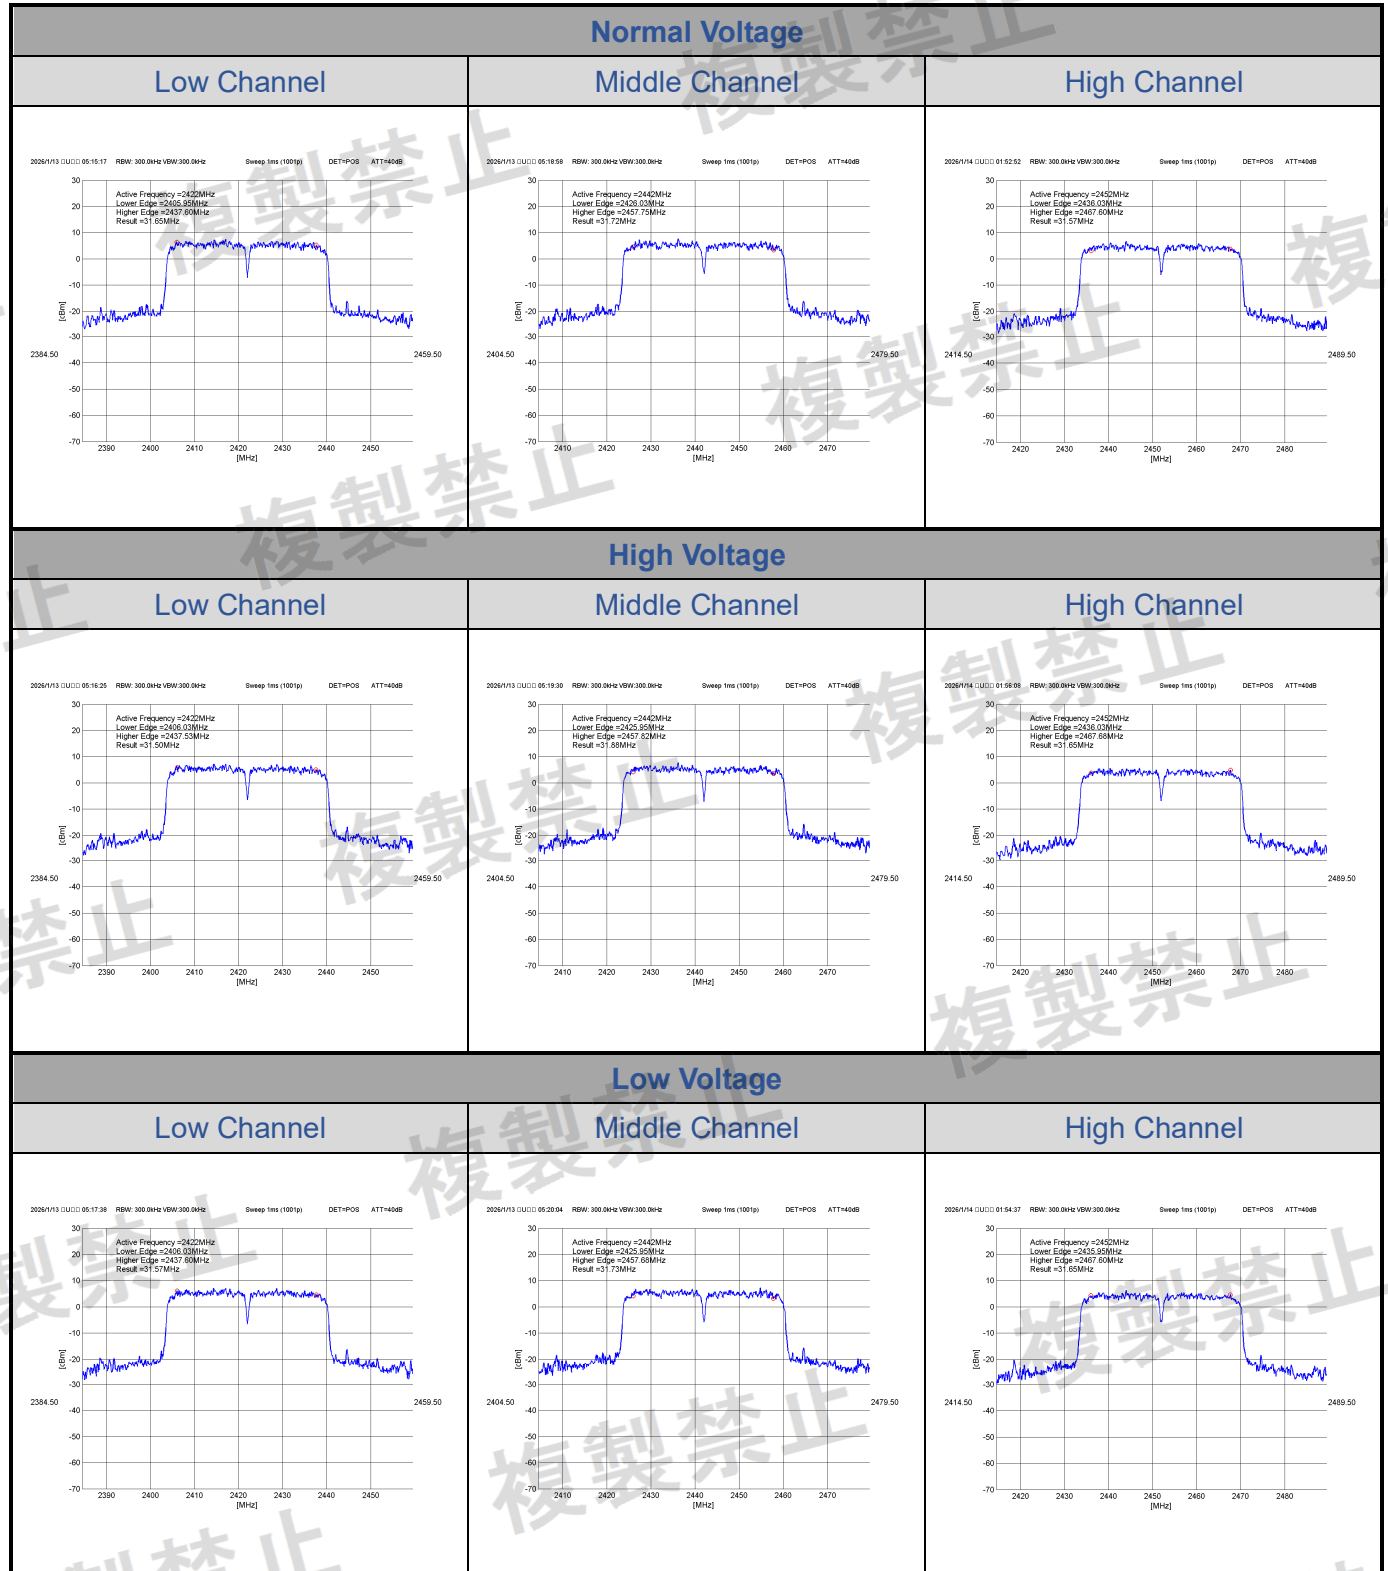


WiFi 2.4G Test Data


CN26VTXQ 001


Test Plots of Transmitter Spurious Emissions


802.11b:2TX


<Chain 0>

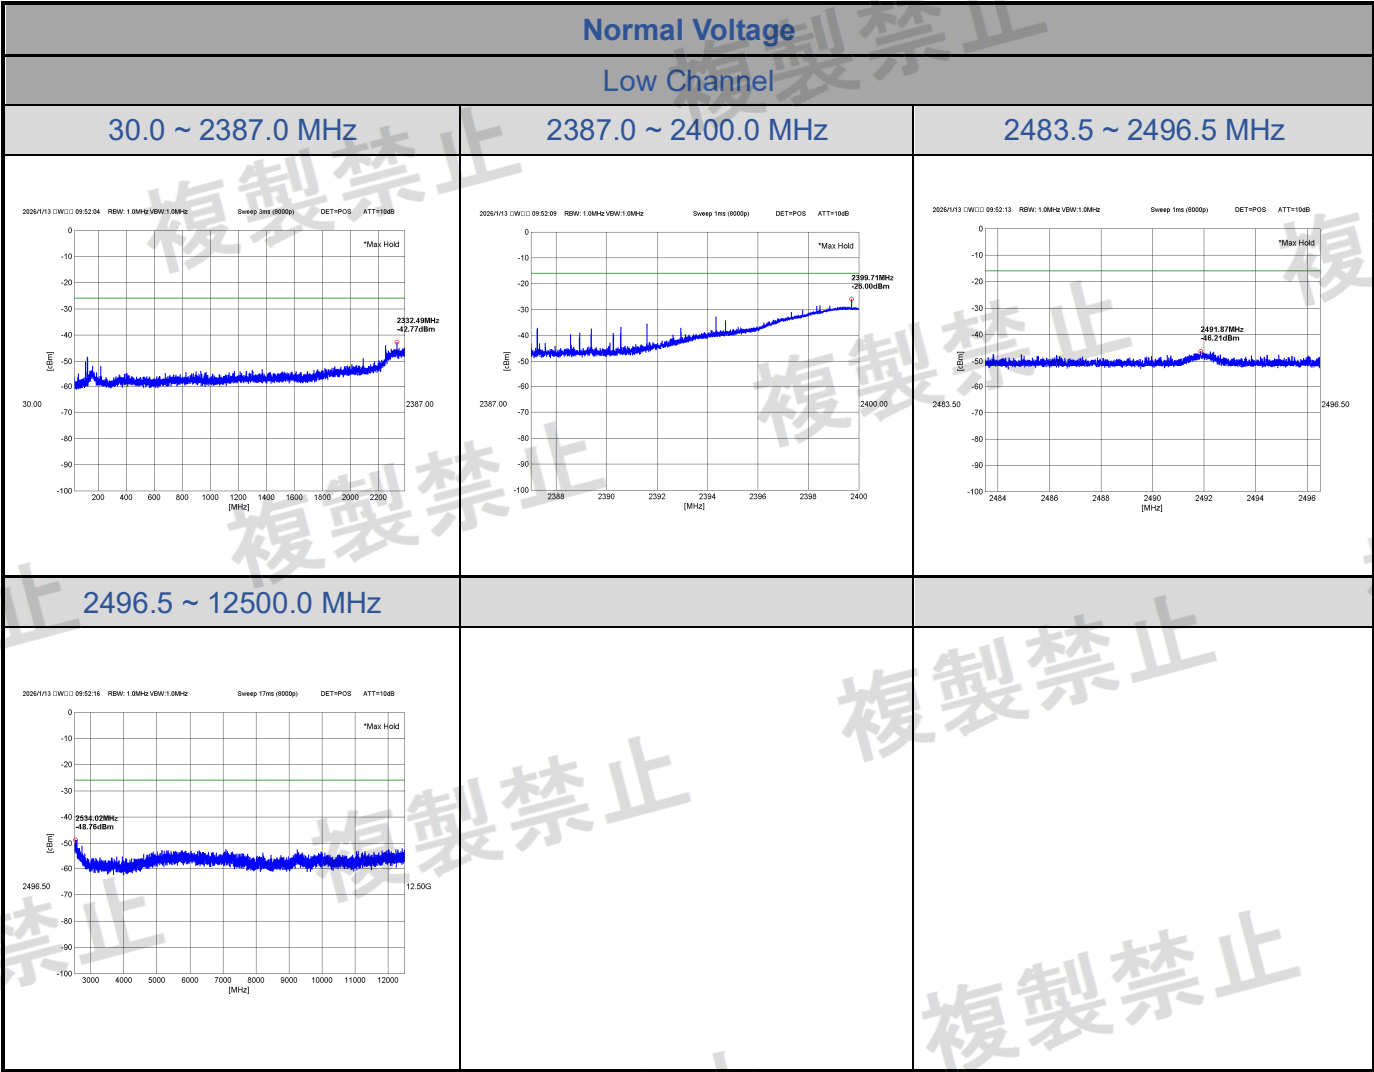


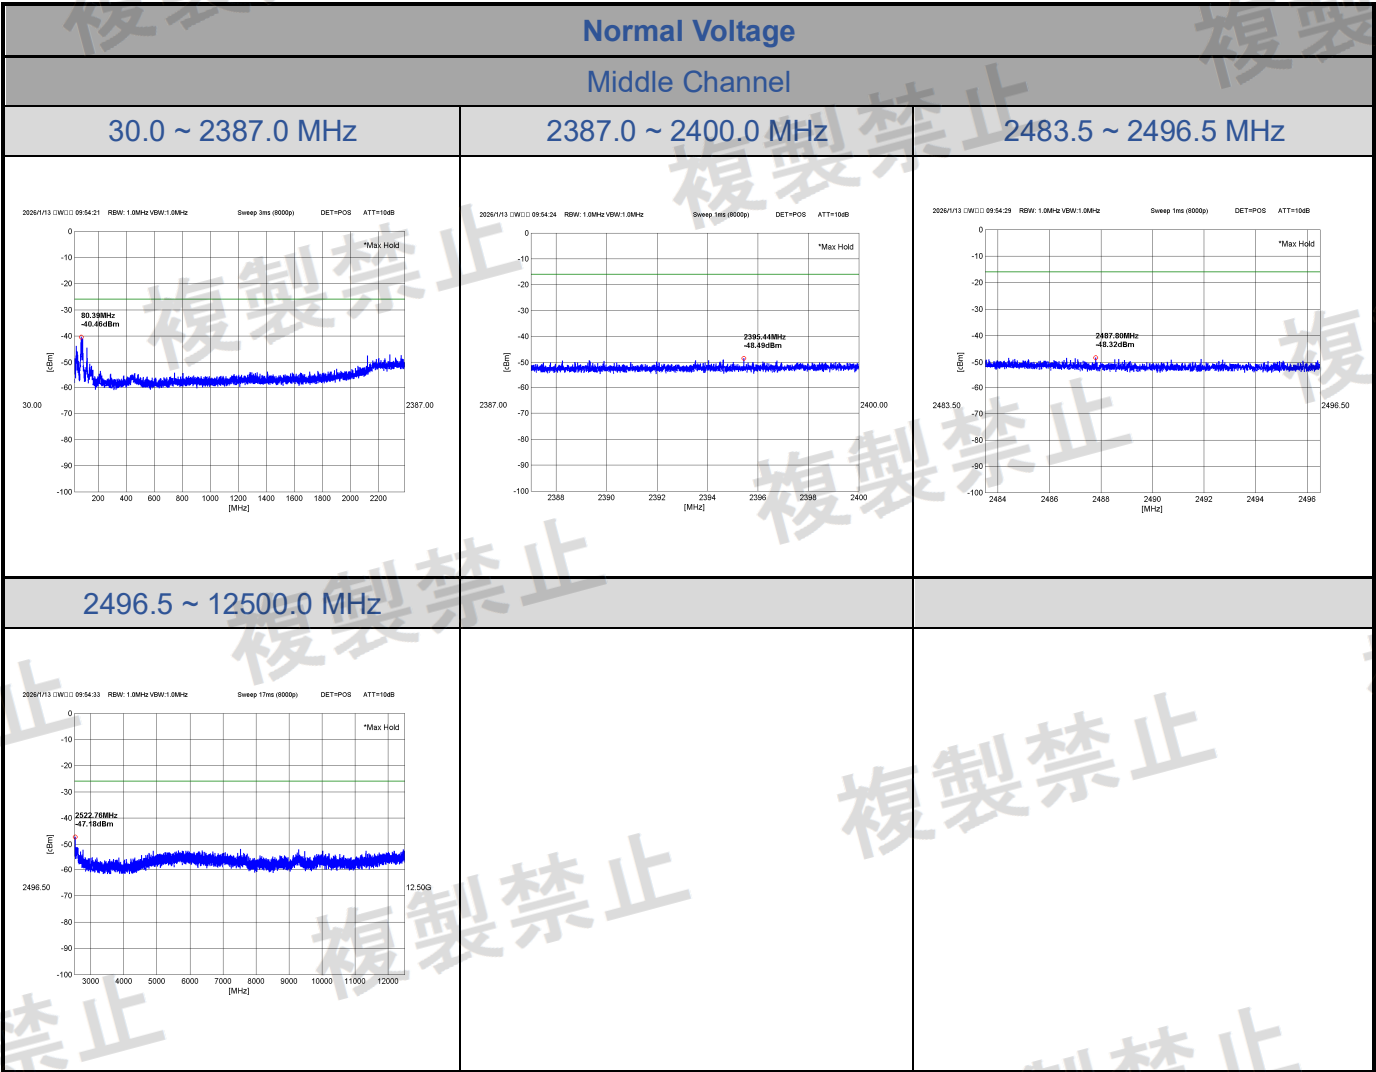


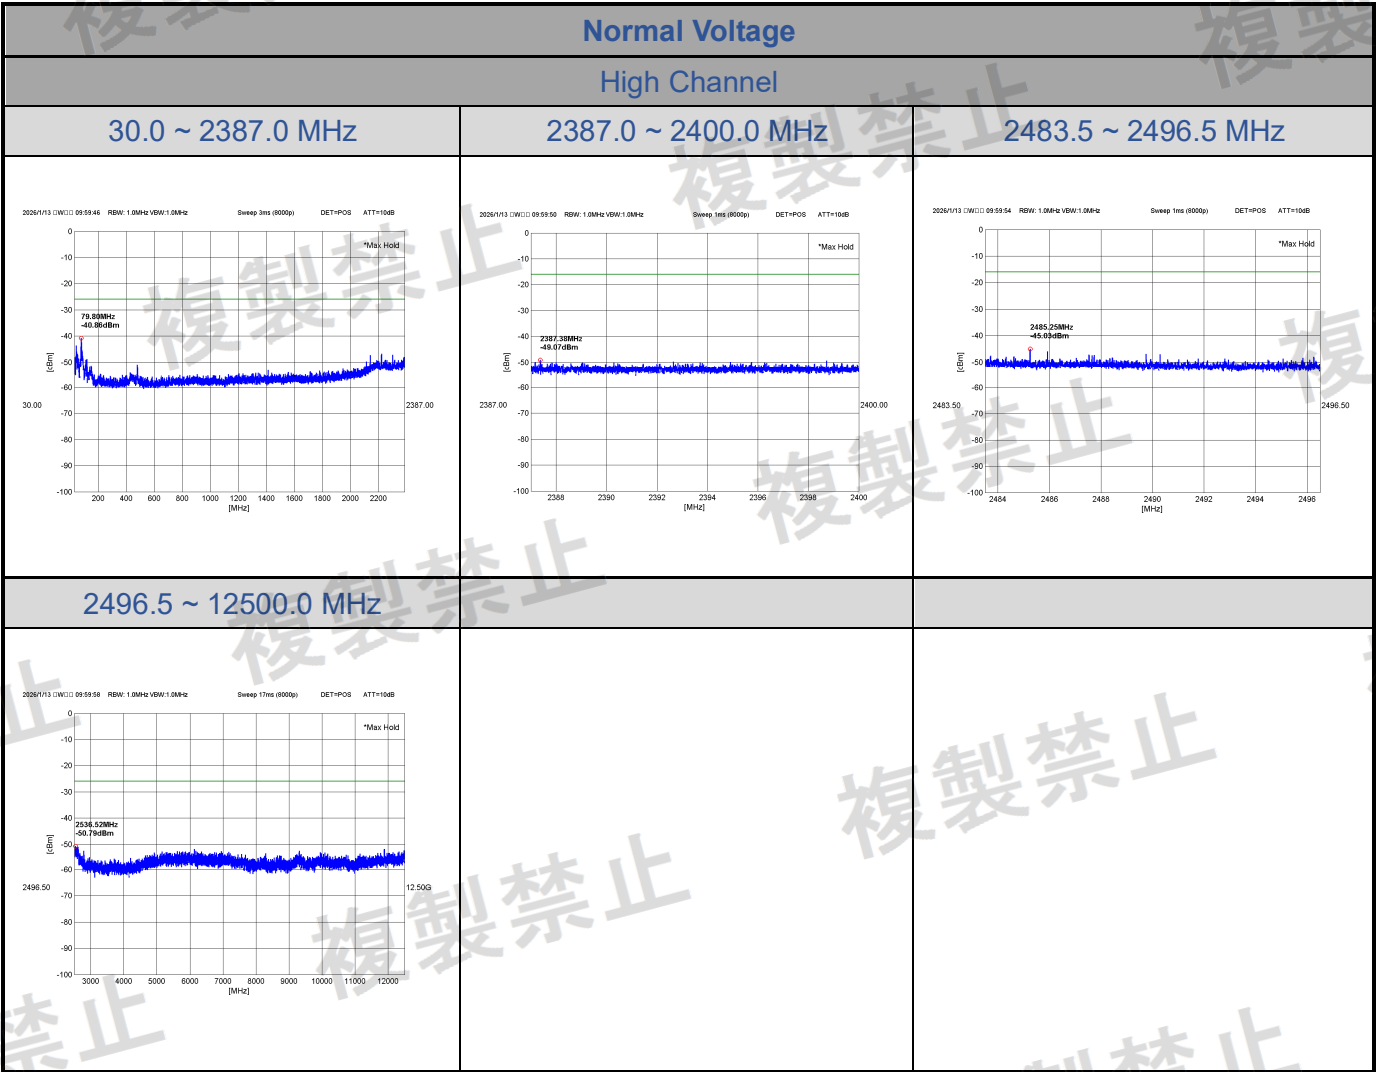


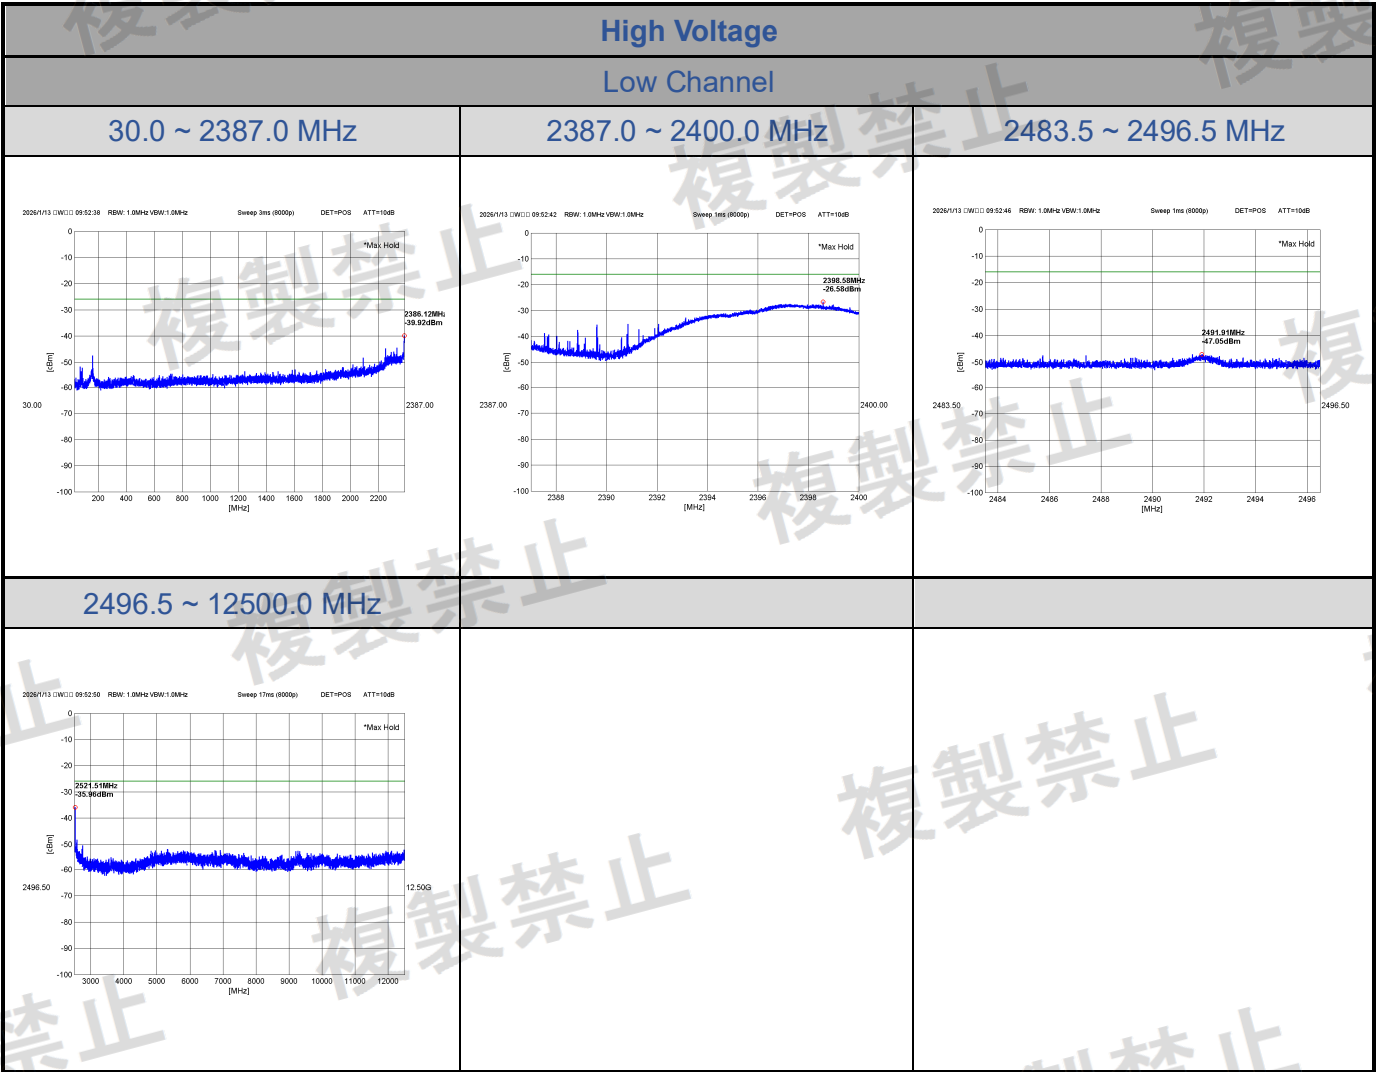

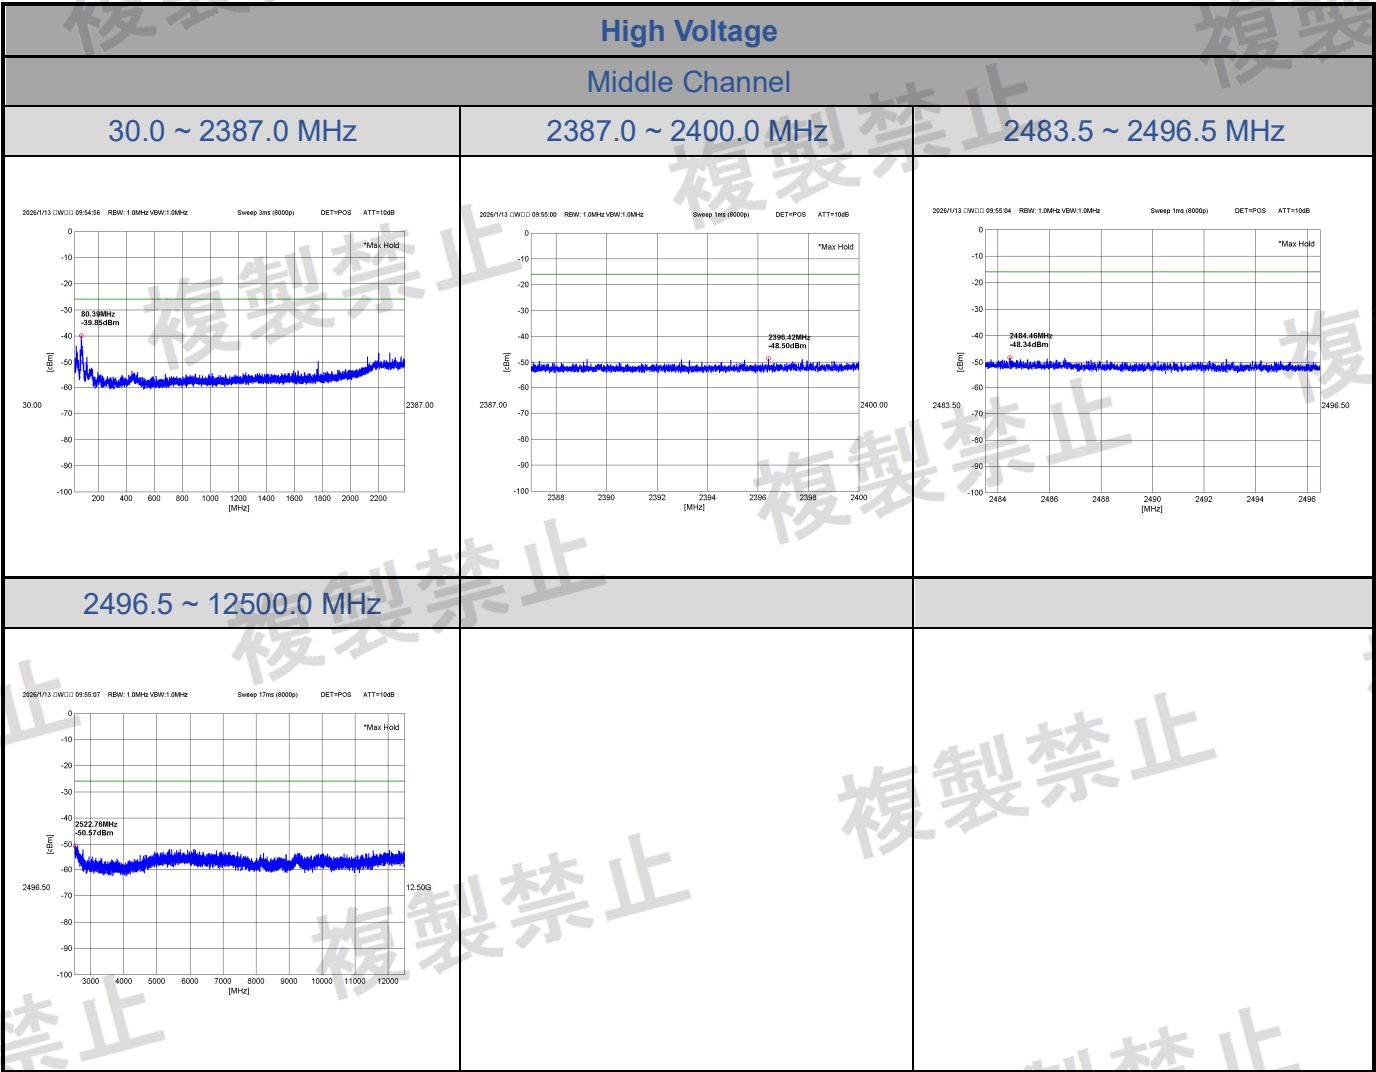

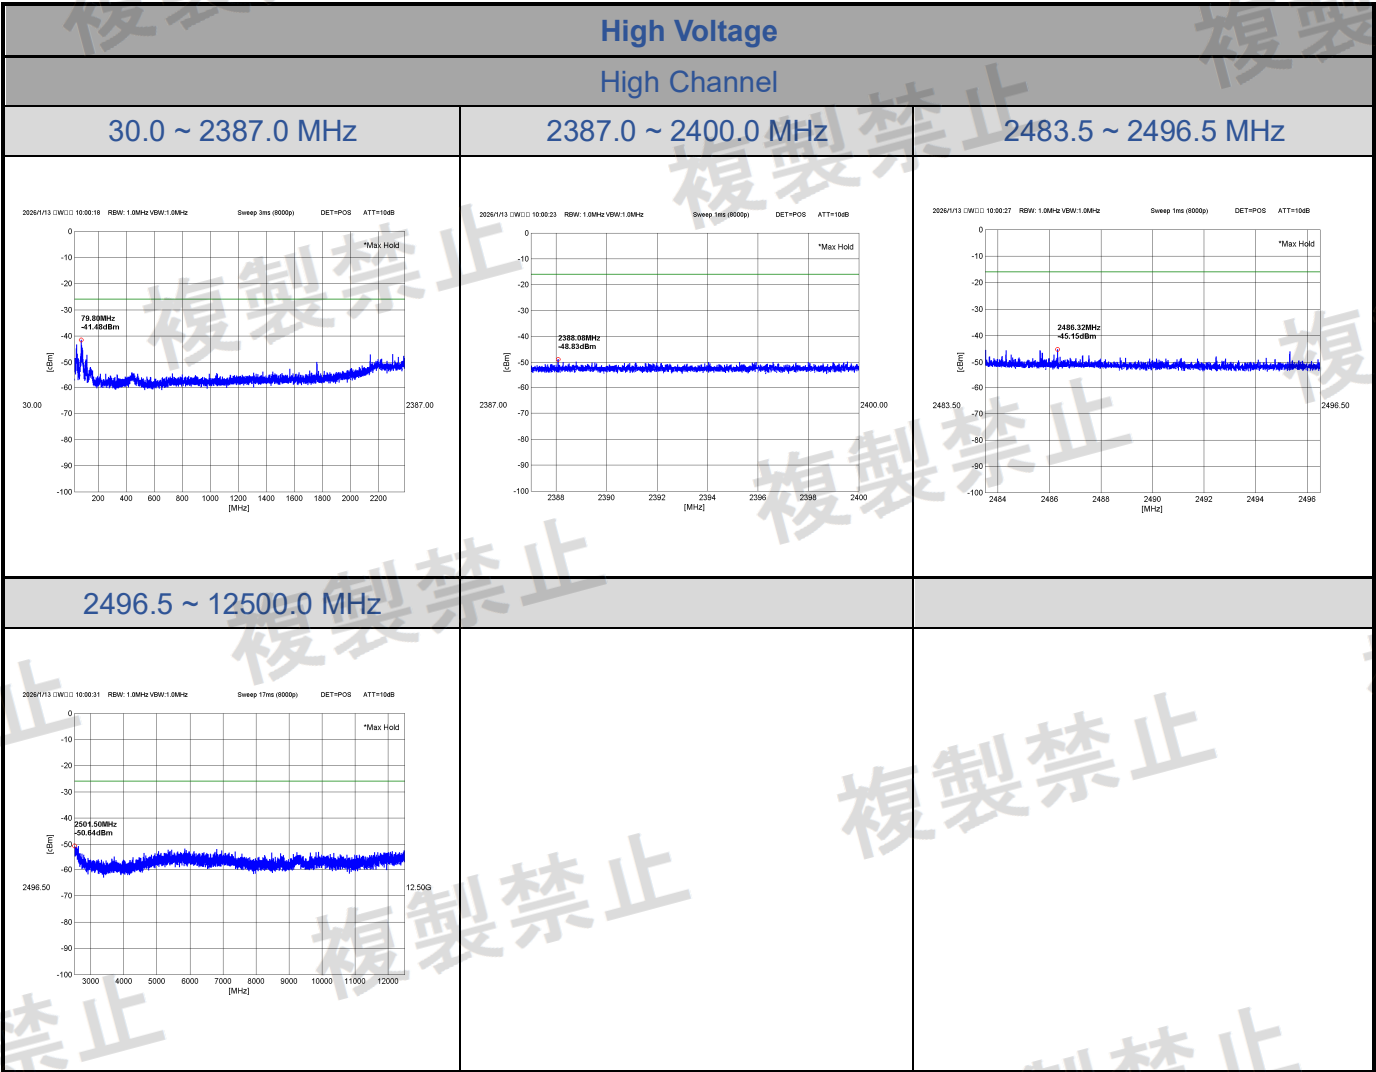


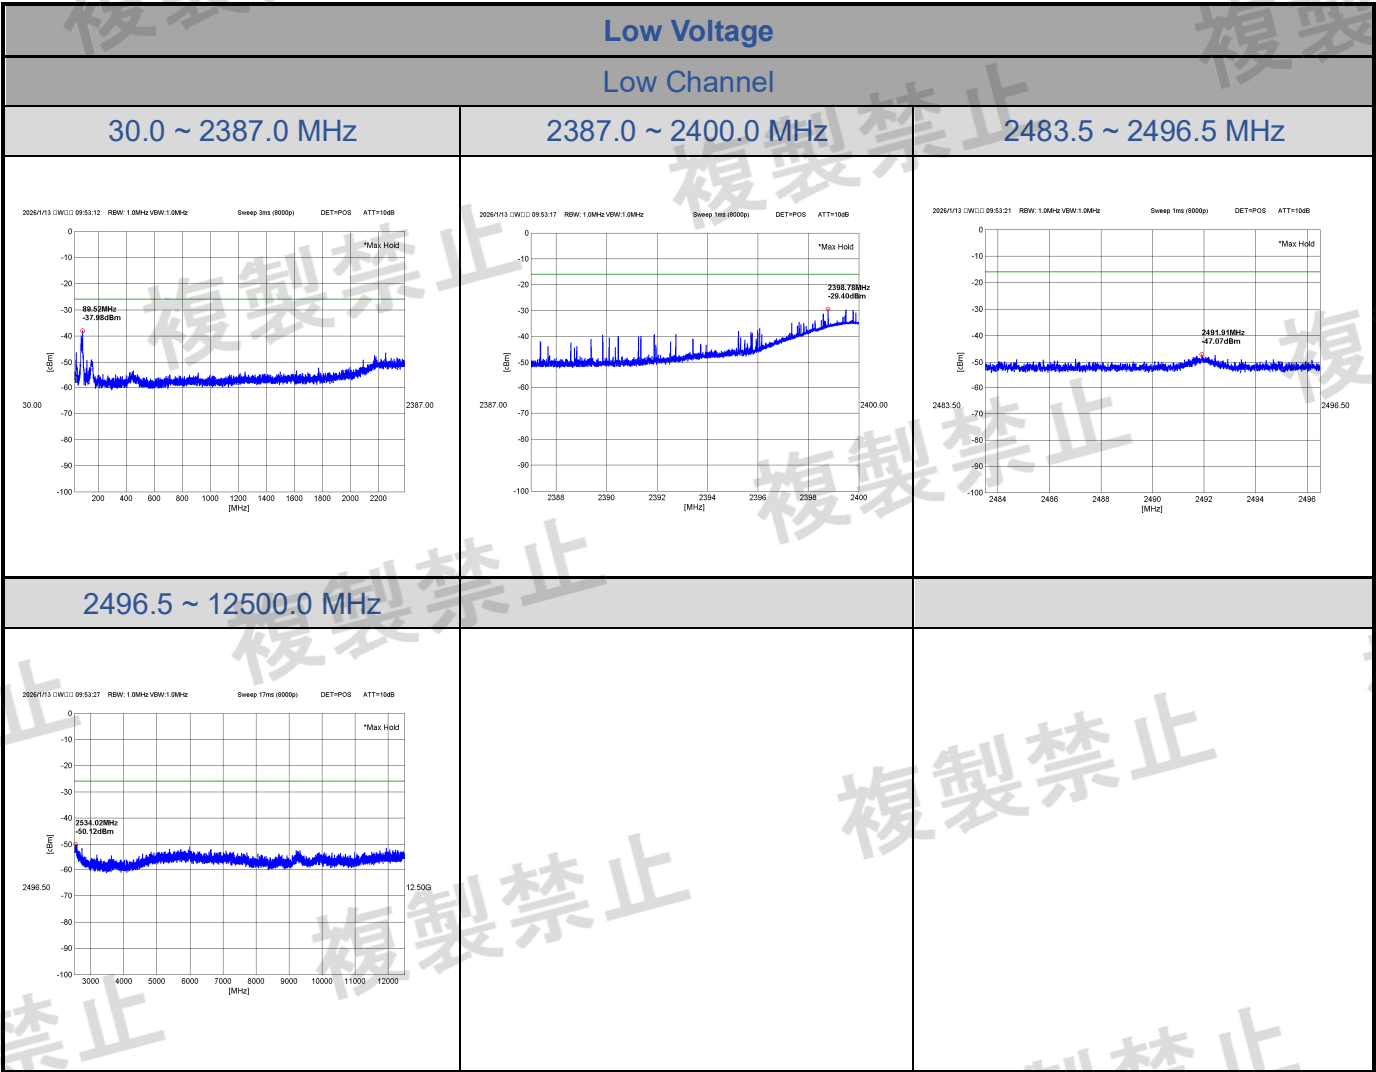

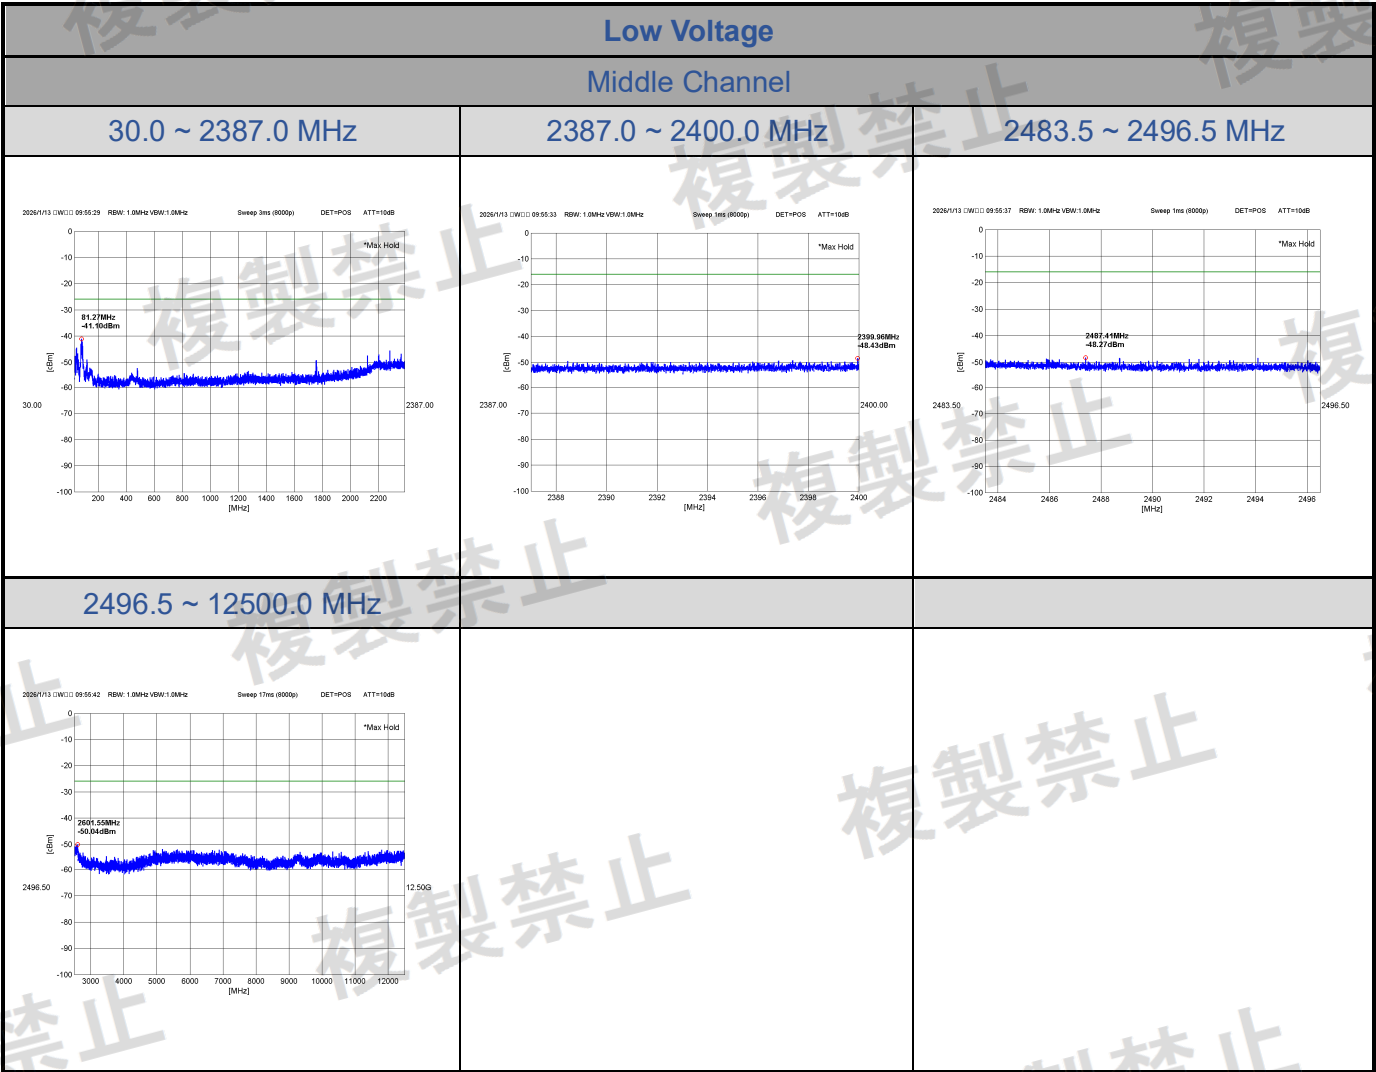

WiFi 2.4G Test Data

CN26VTXQ 001

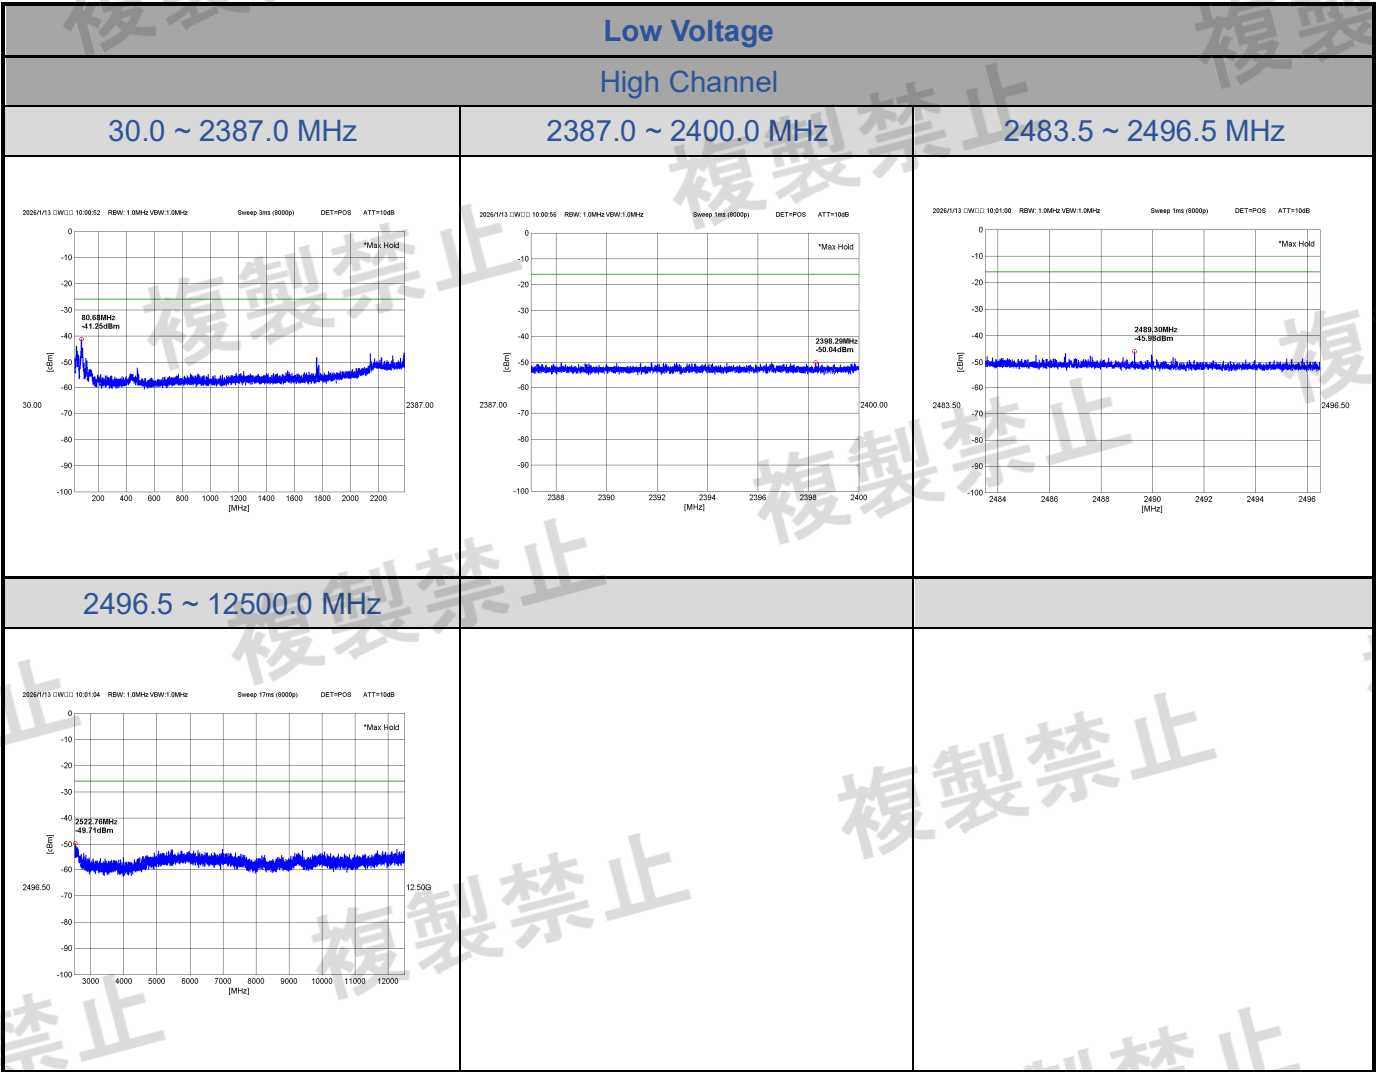


WiFi 2.4G Test Data

CN26VTXQ 001


802.11b:2TX


<Chain 1>

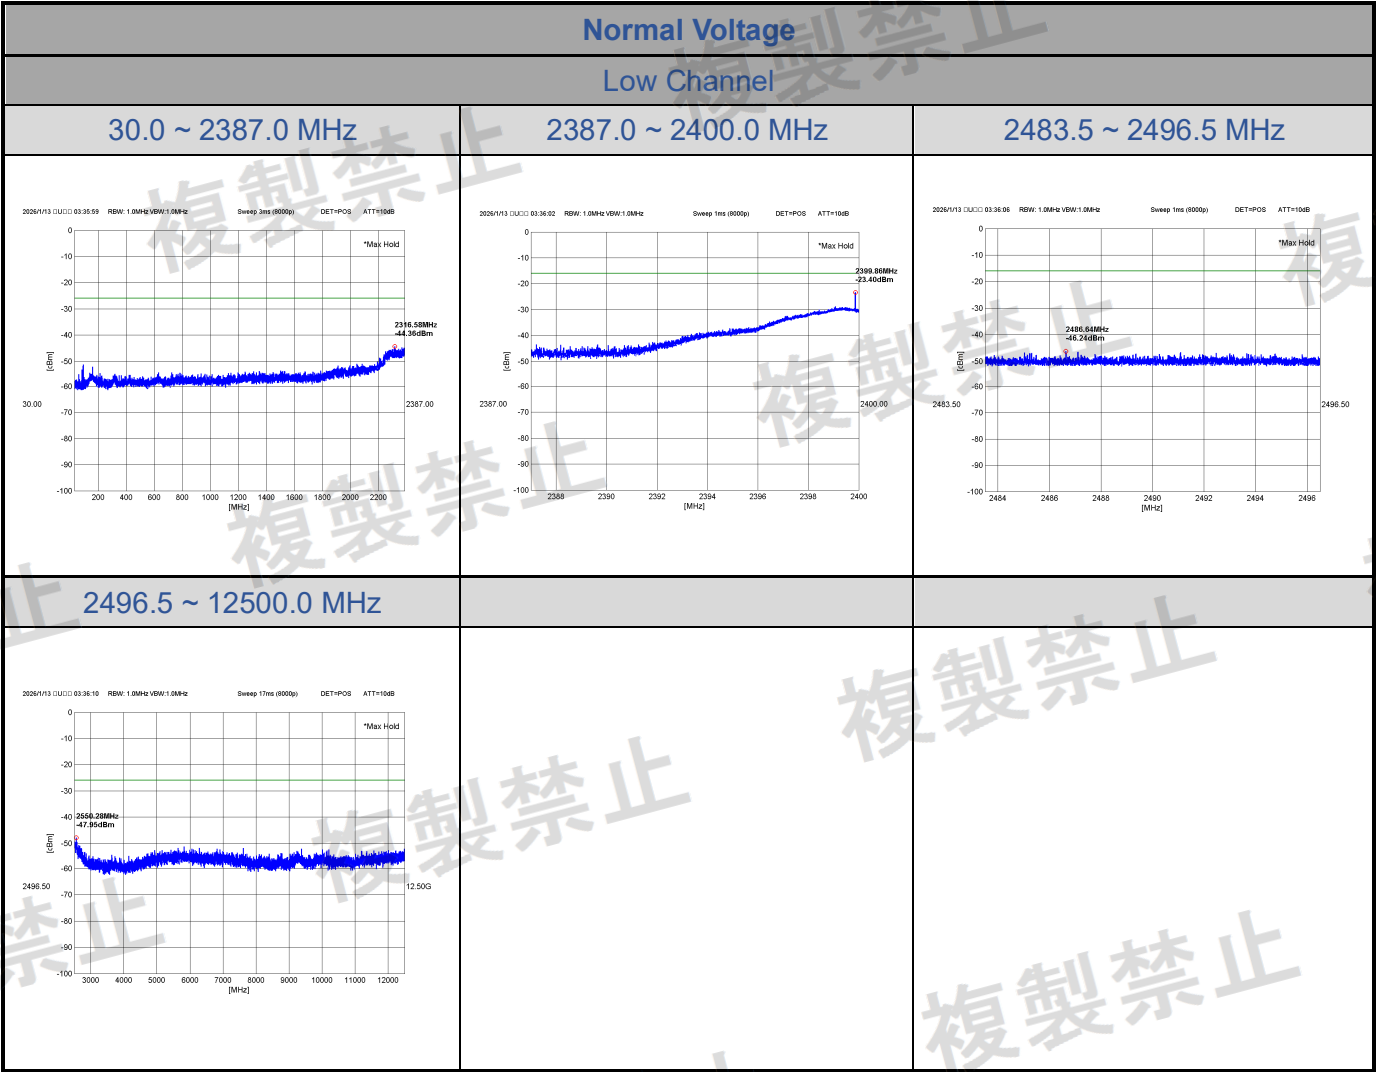



WiFi 2.4G Test Data


CN26VTXQ 001

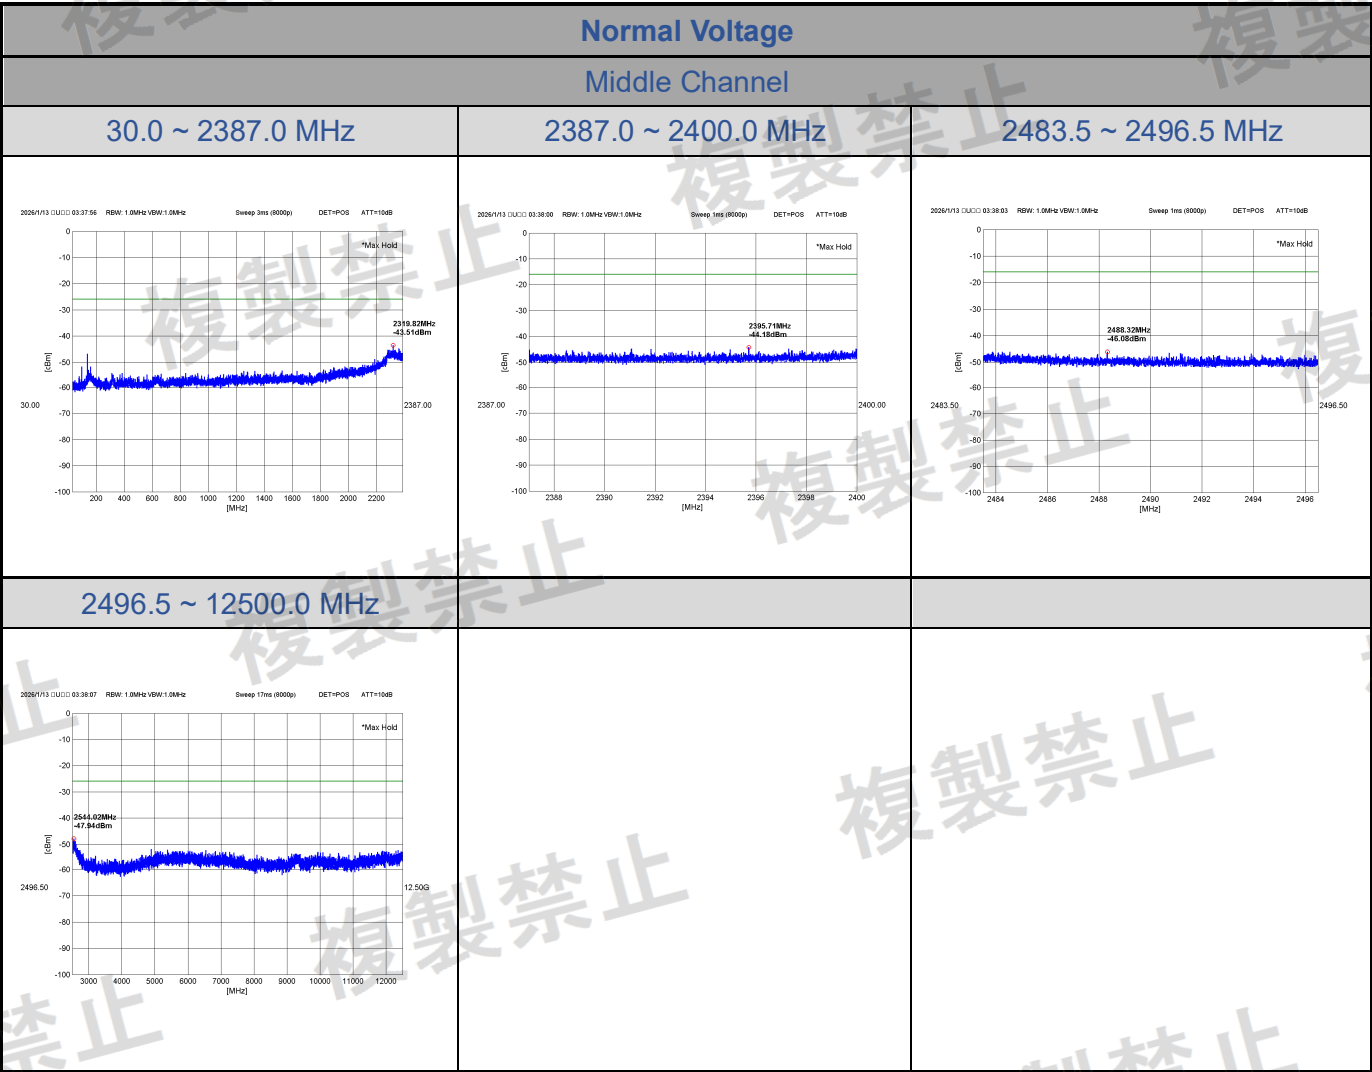


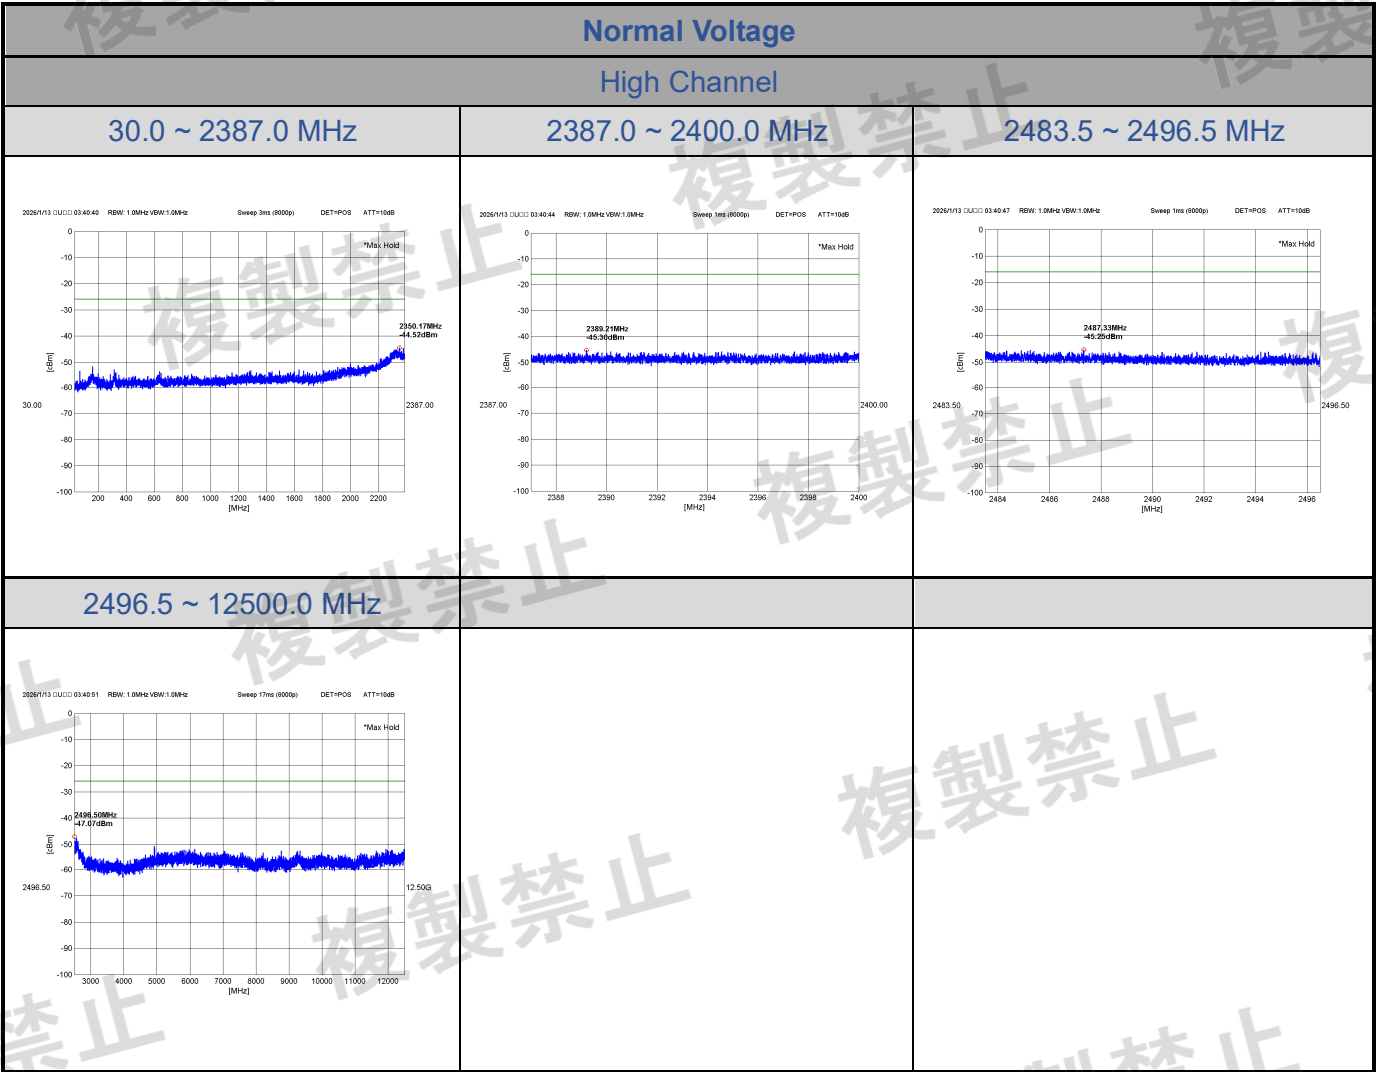


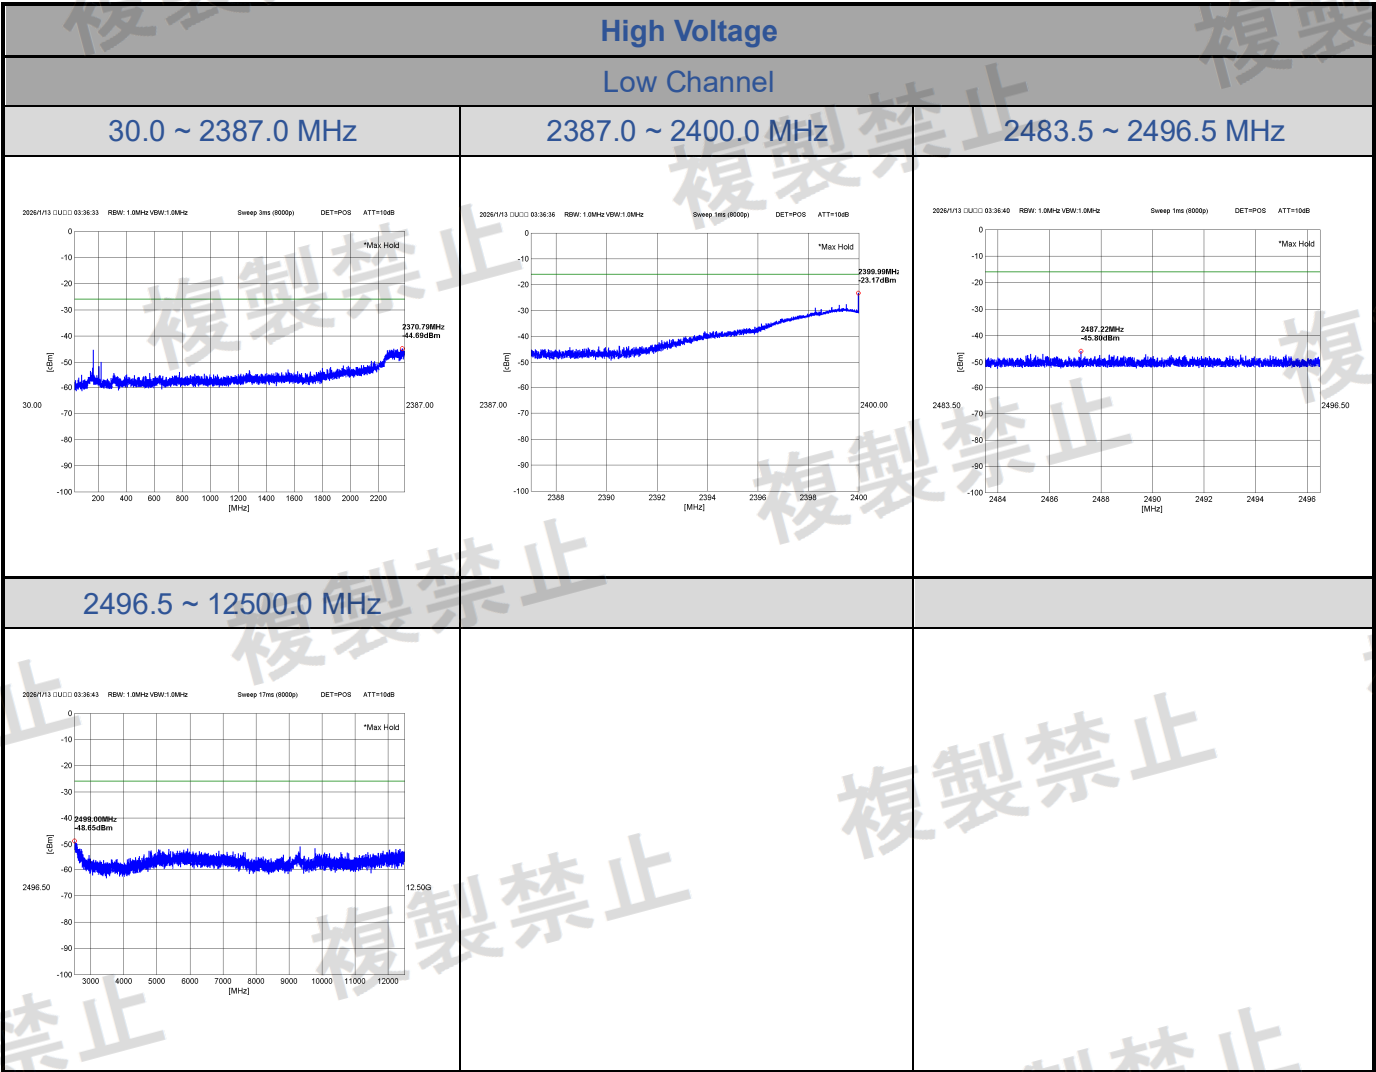


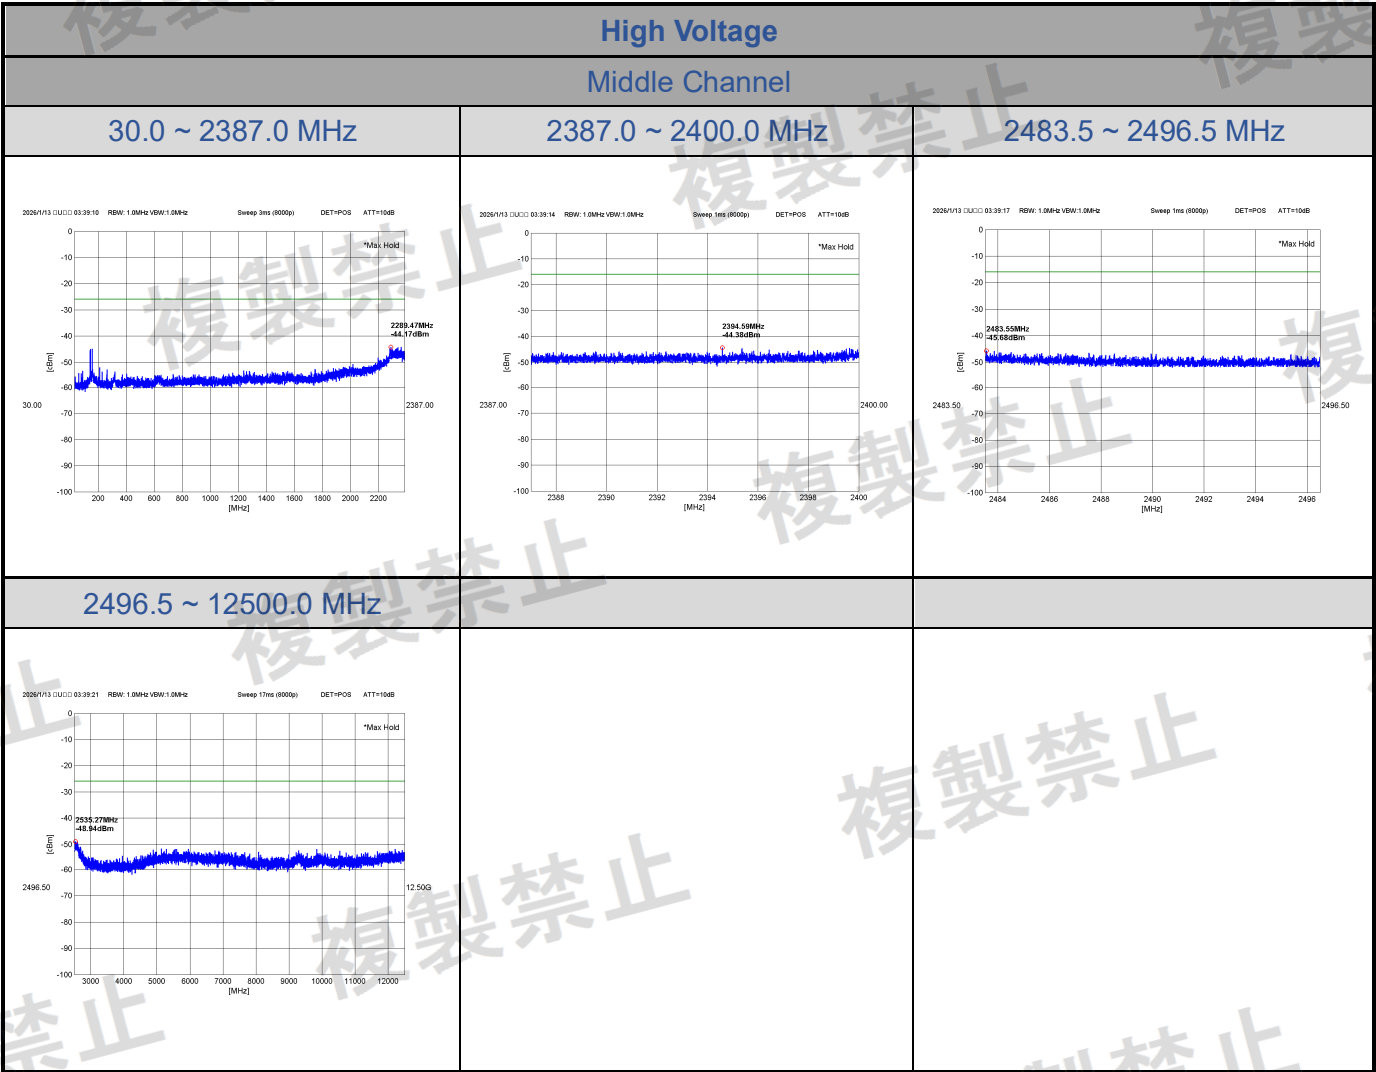

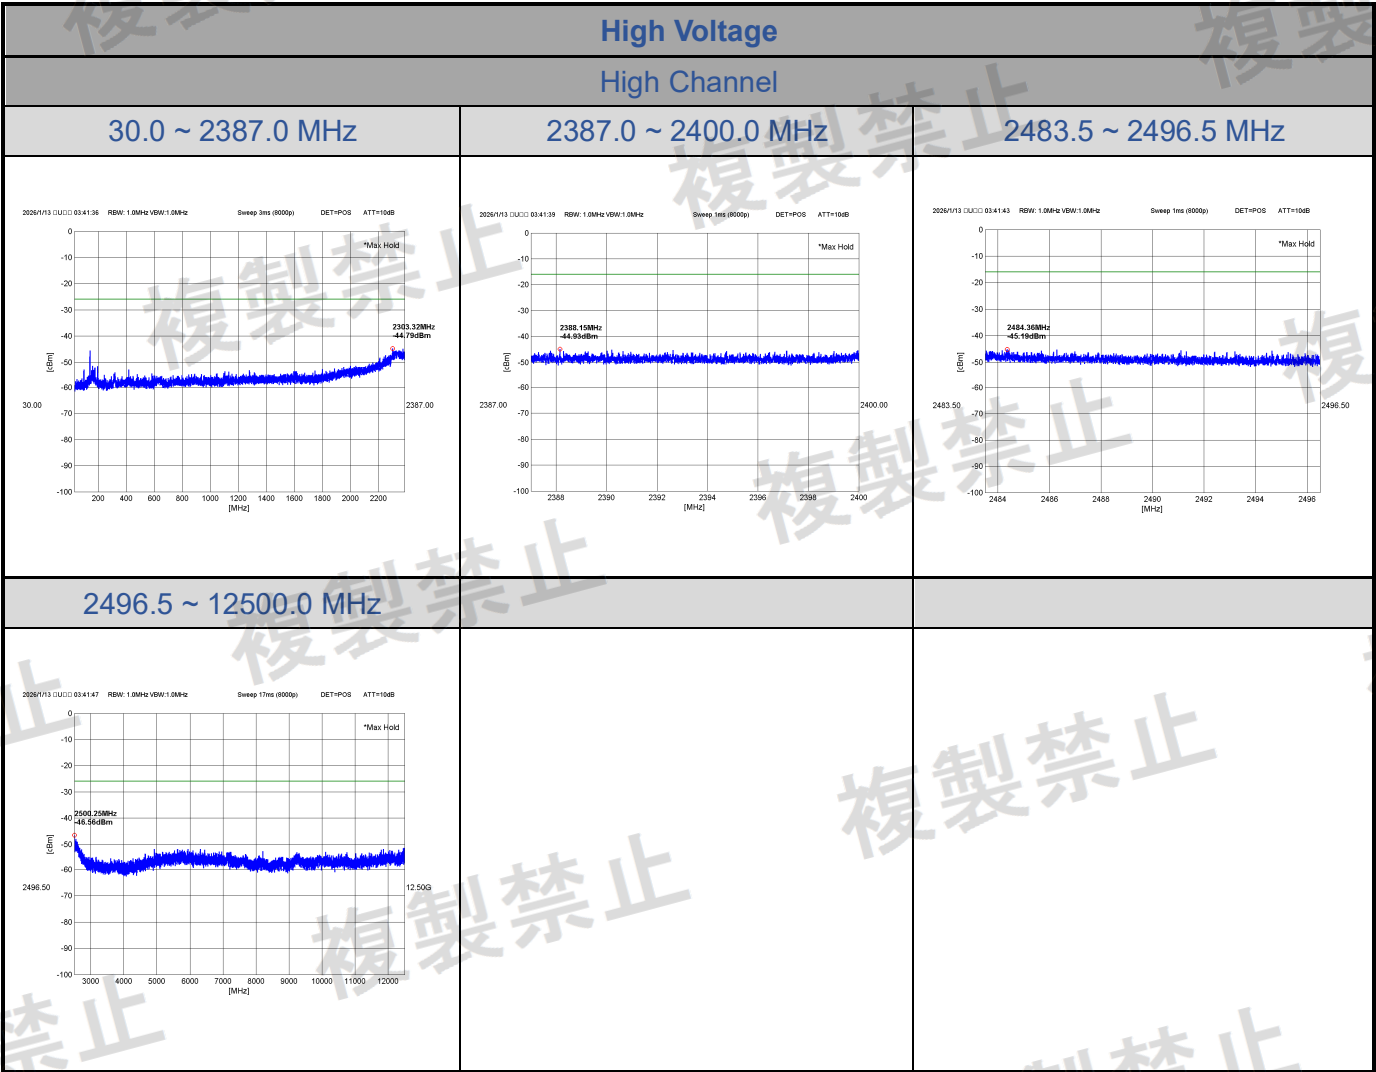

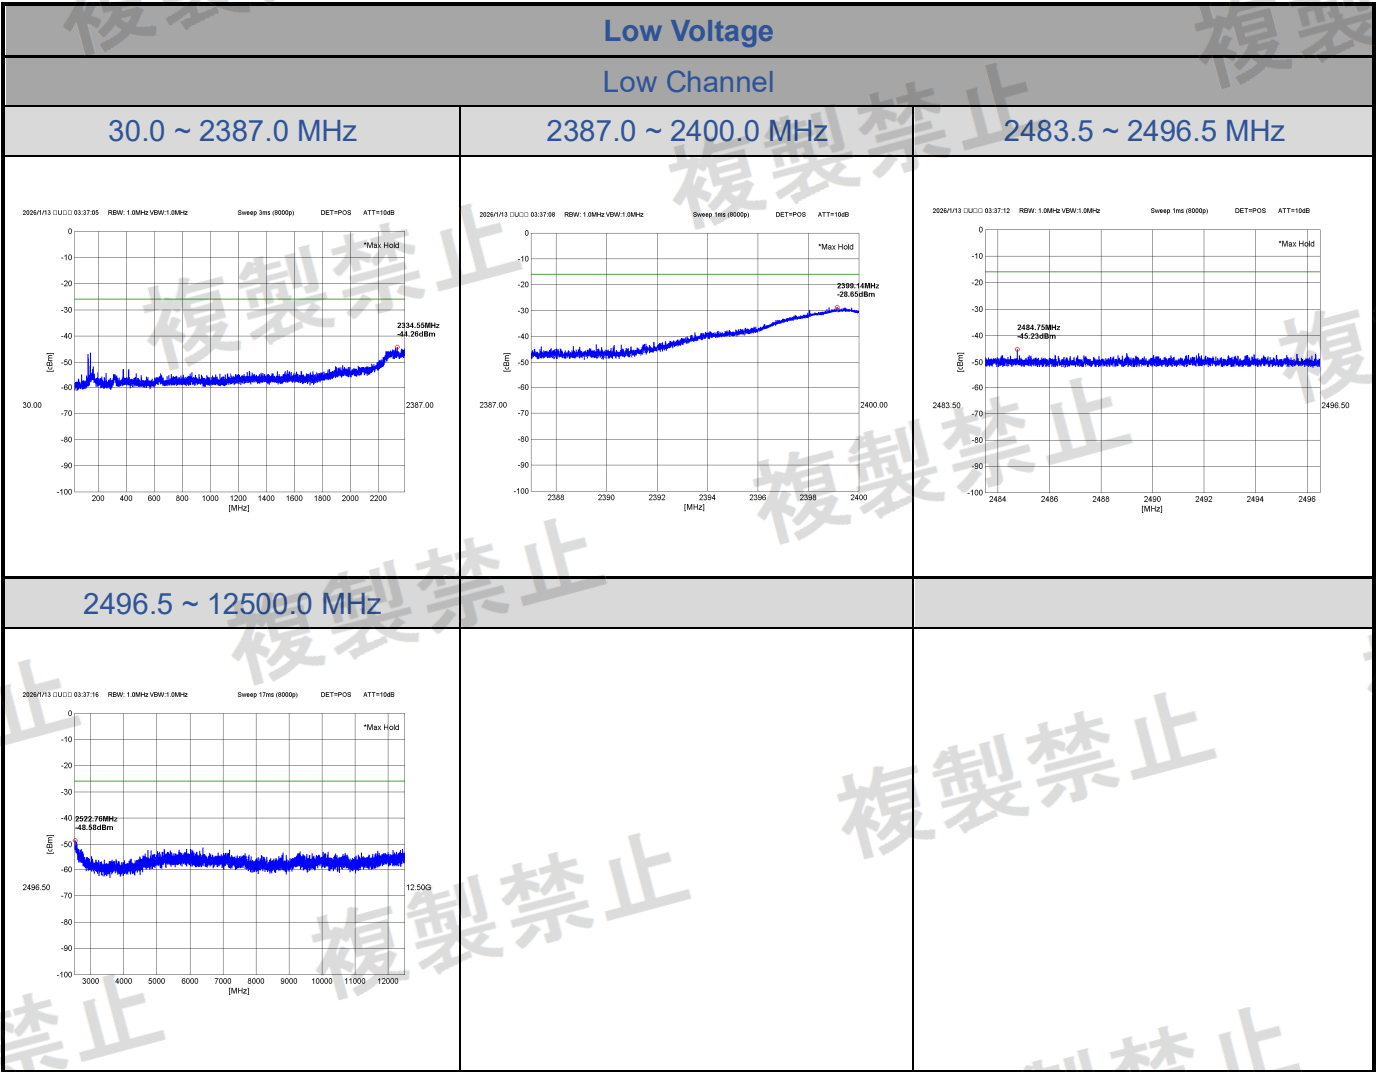

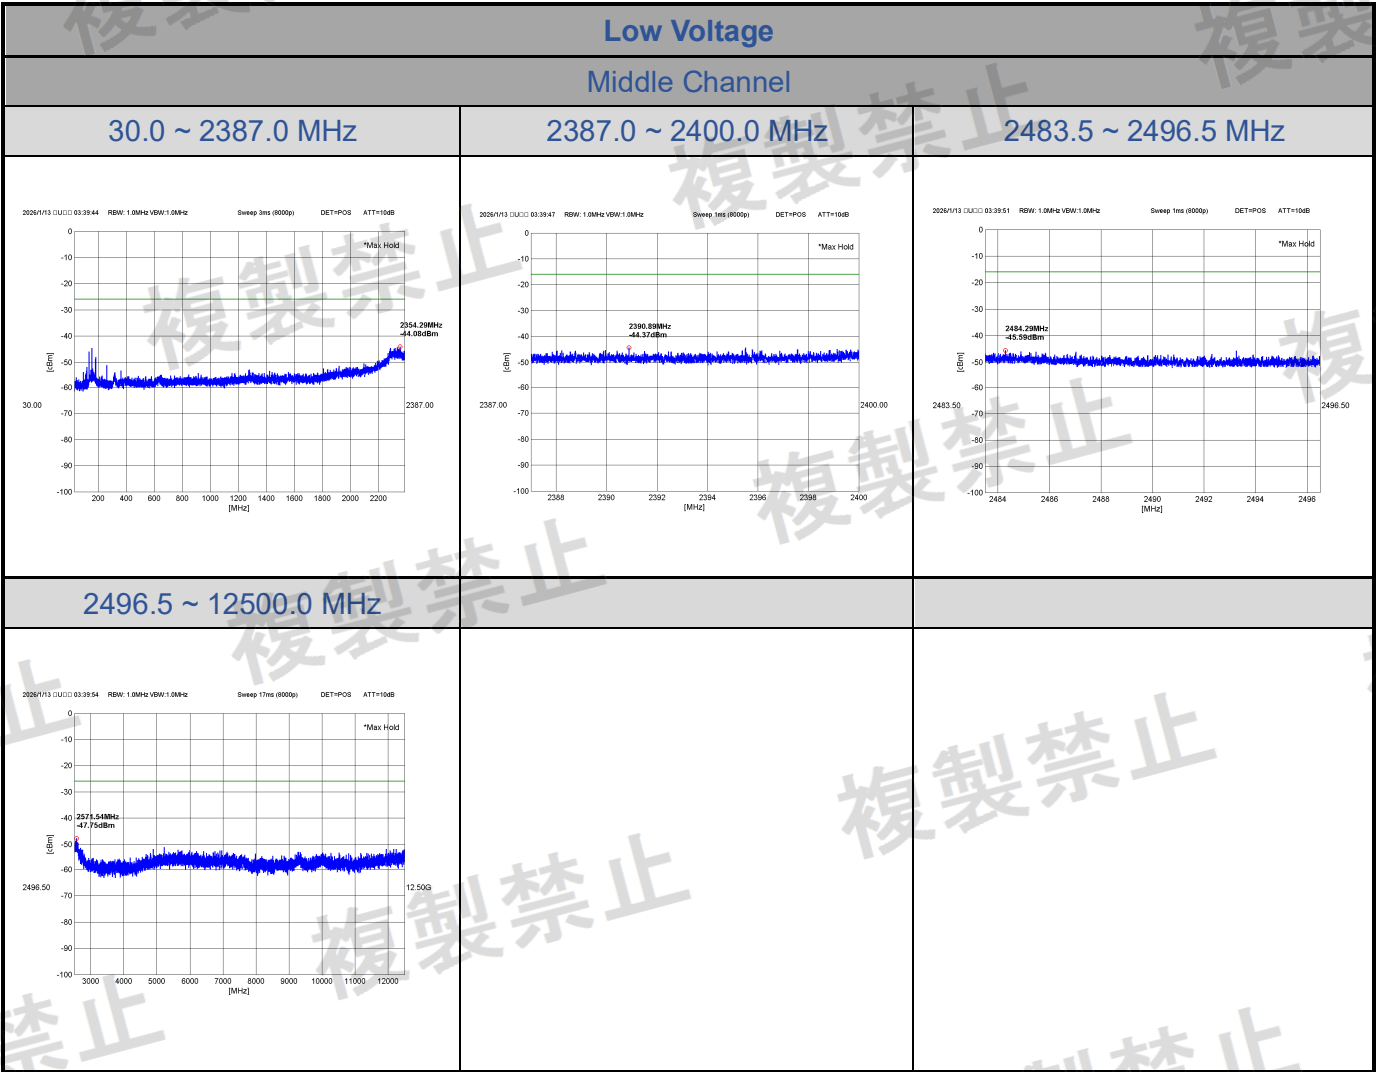

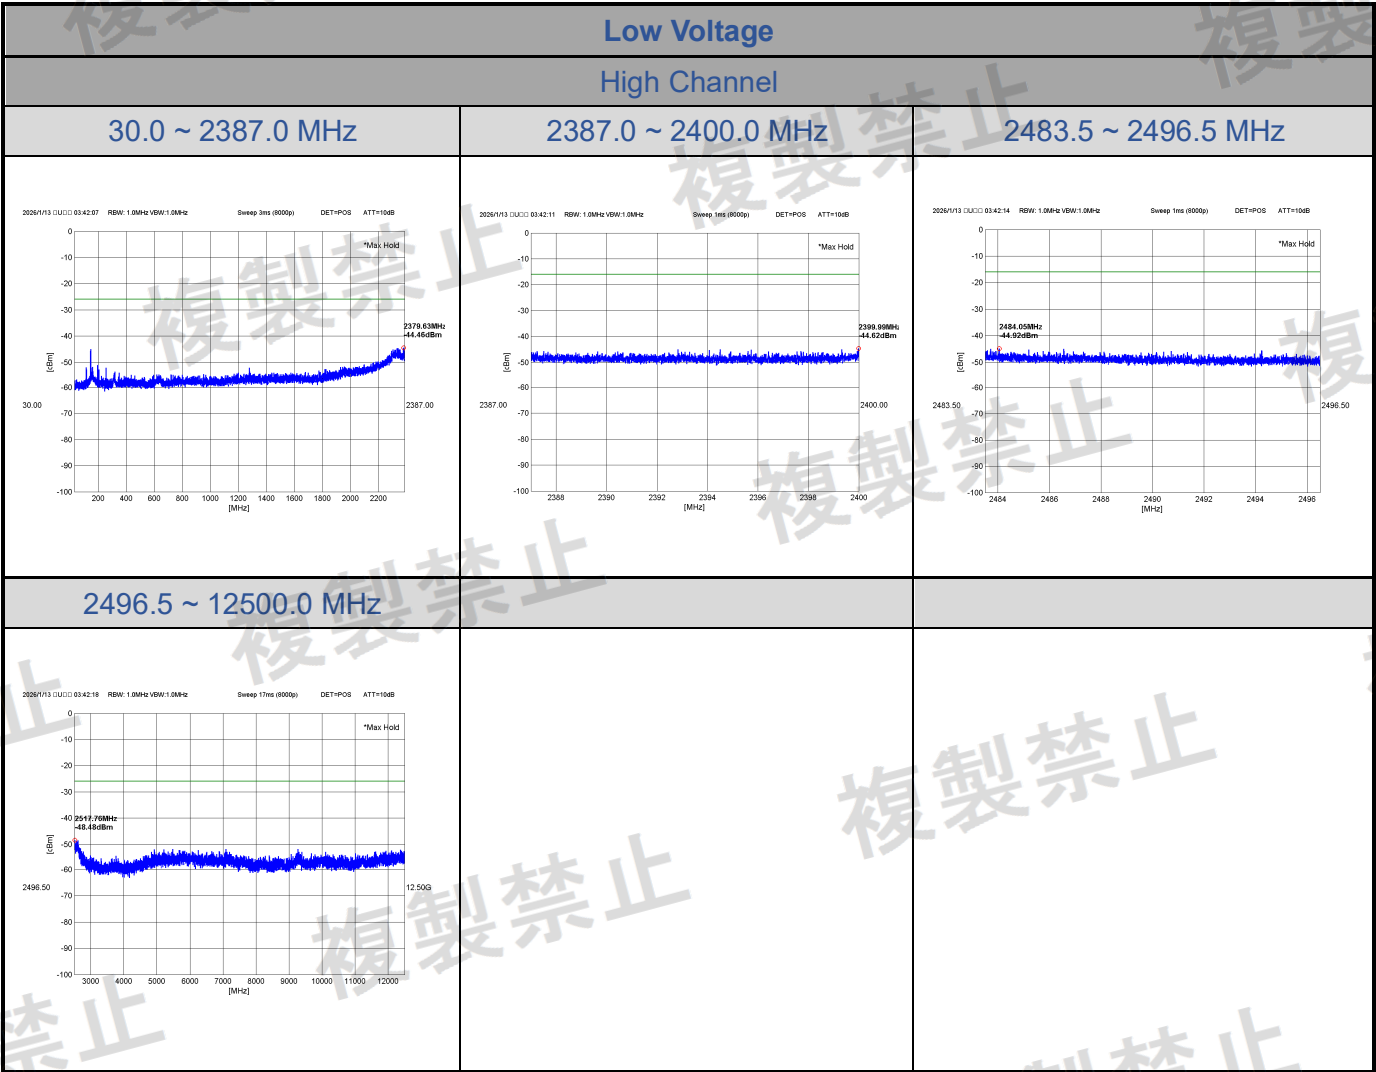



WiFi 2.4G Test Data

CN26VTXQ 001

802.11g:2TX


<Chain 0>

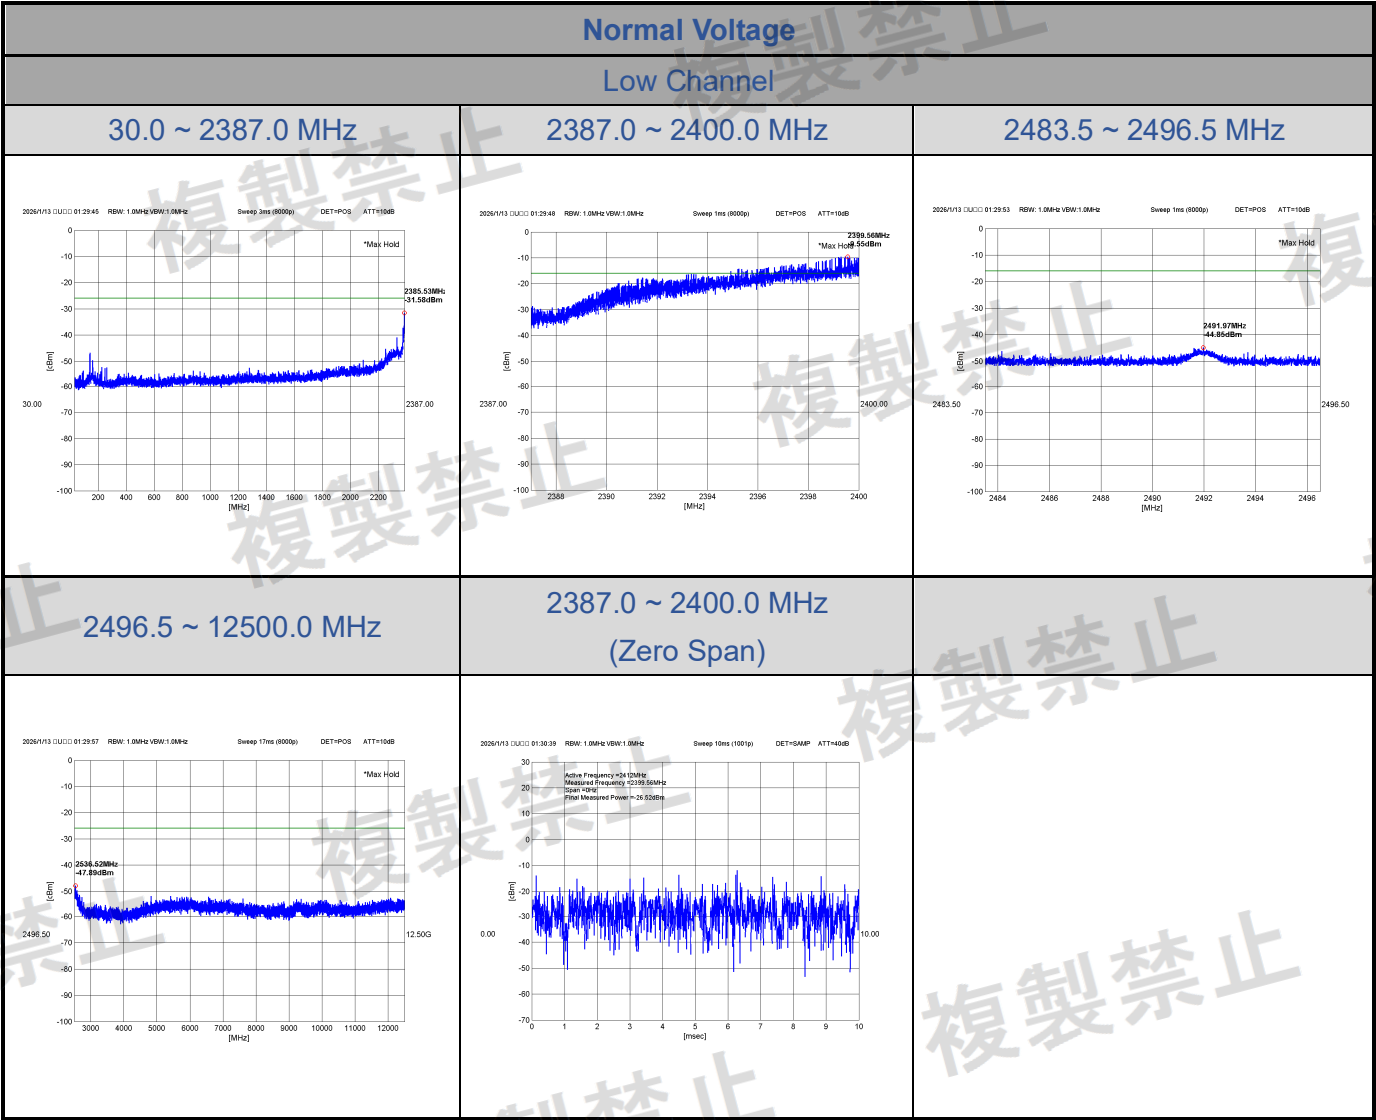

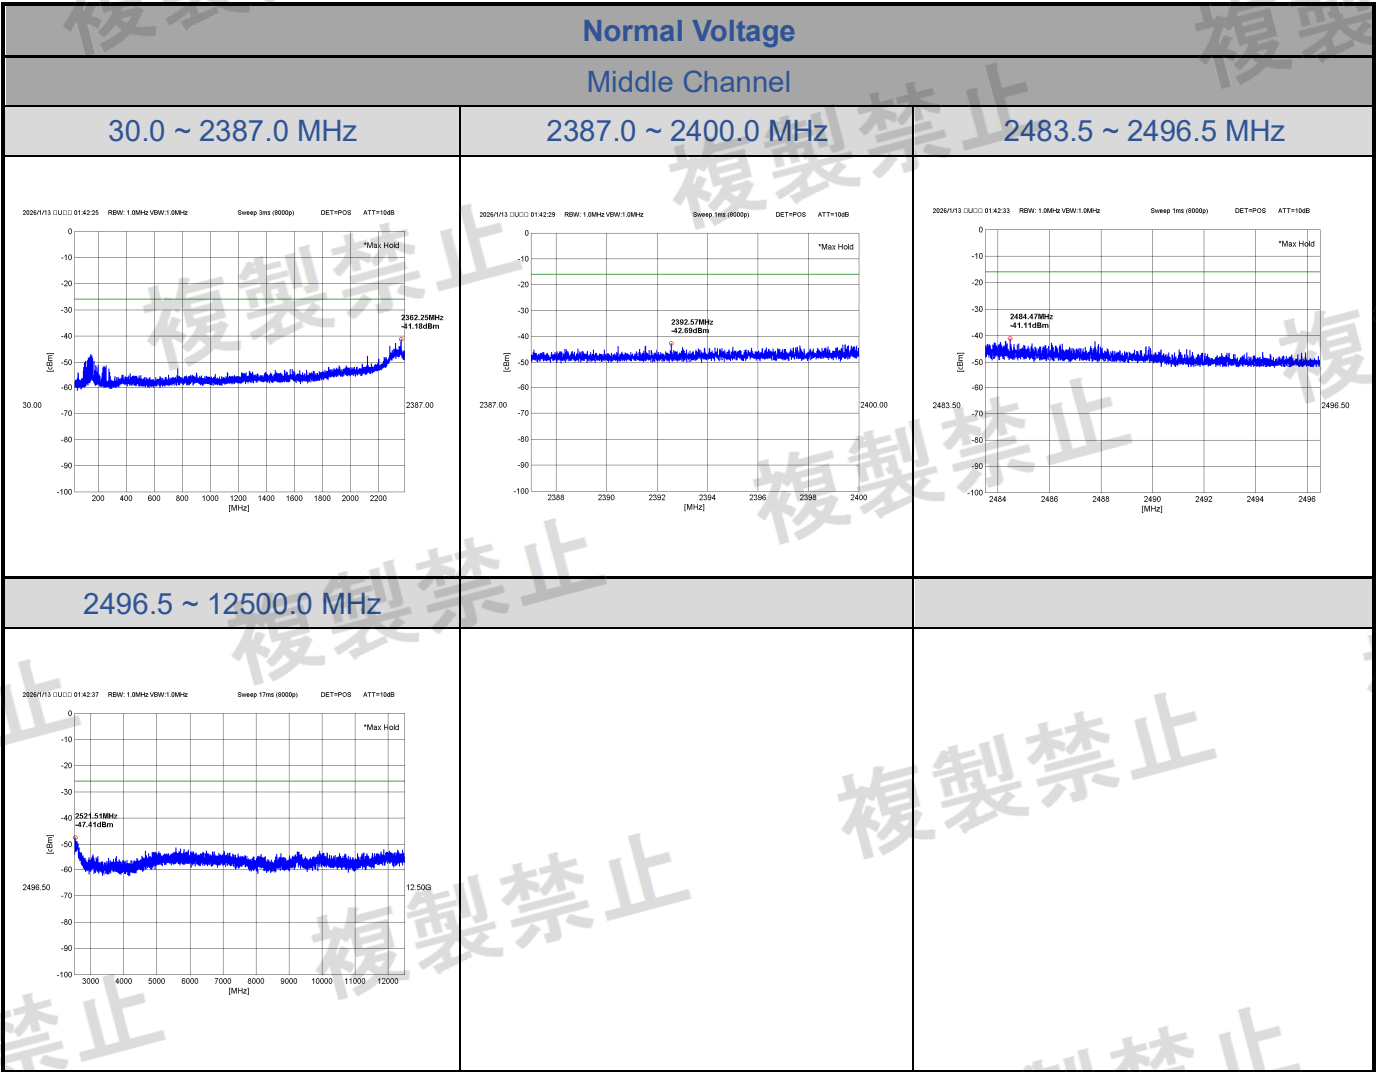


WiFi 2.4G Test Data


CN26VTXQ 001

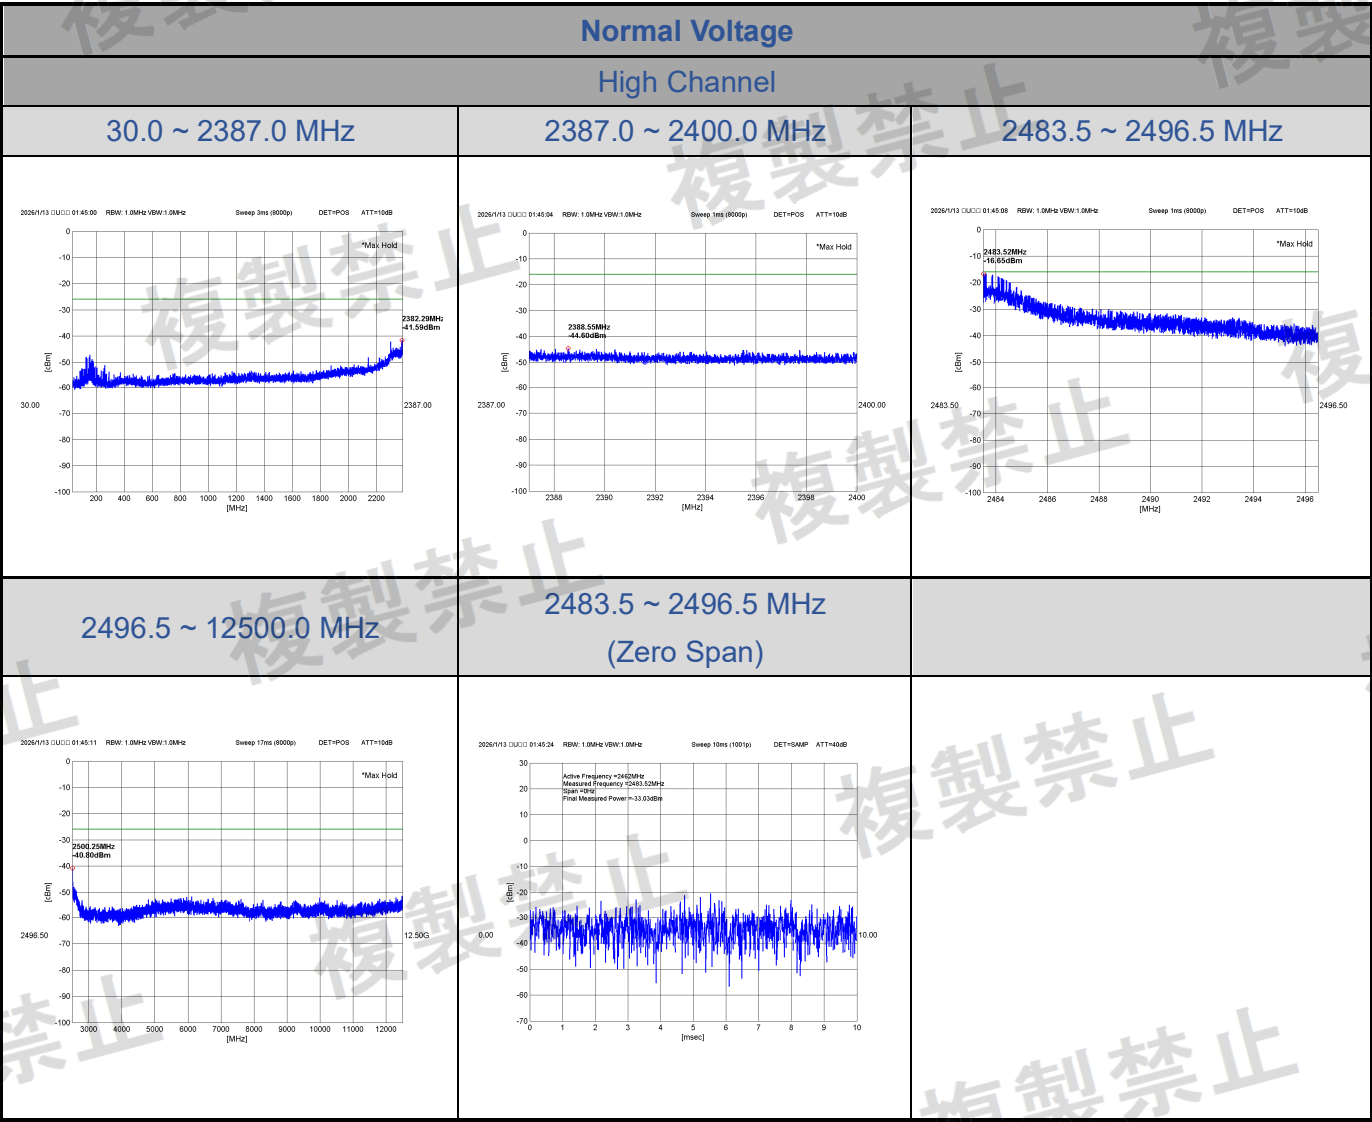

WiFi 2.4G Test Data


CN26VTXQ 001

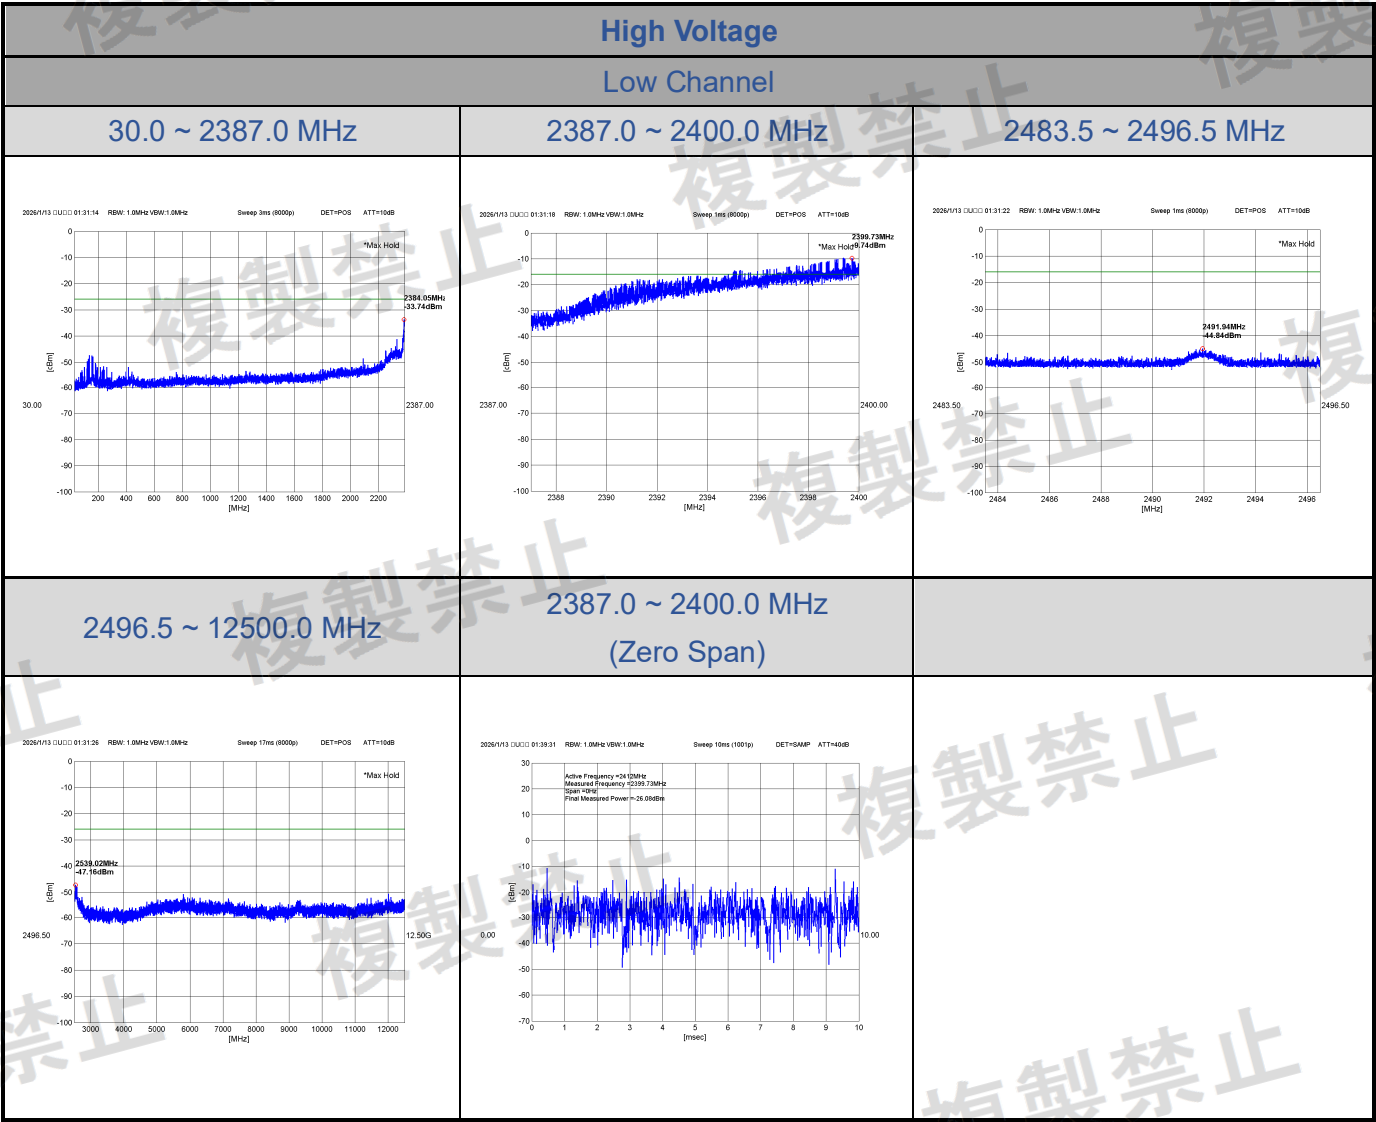

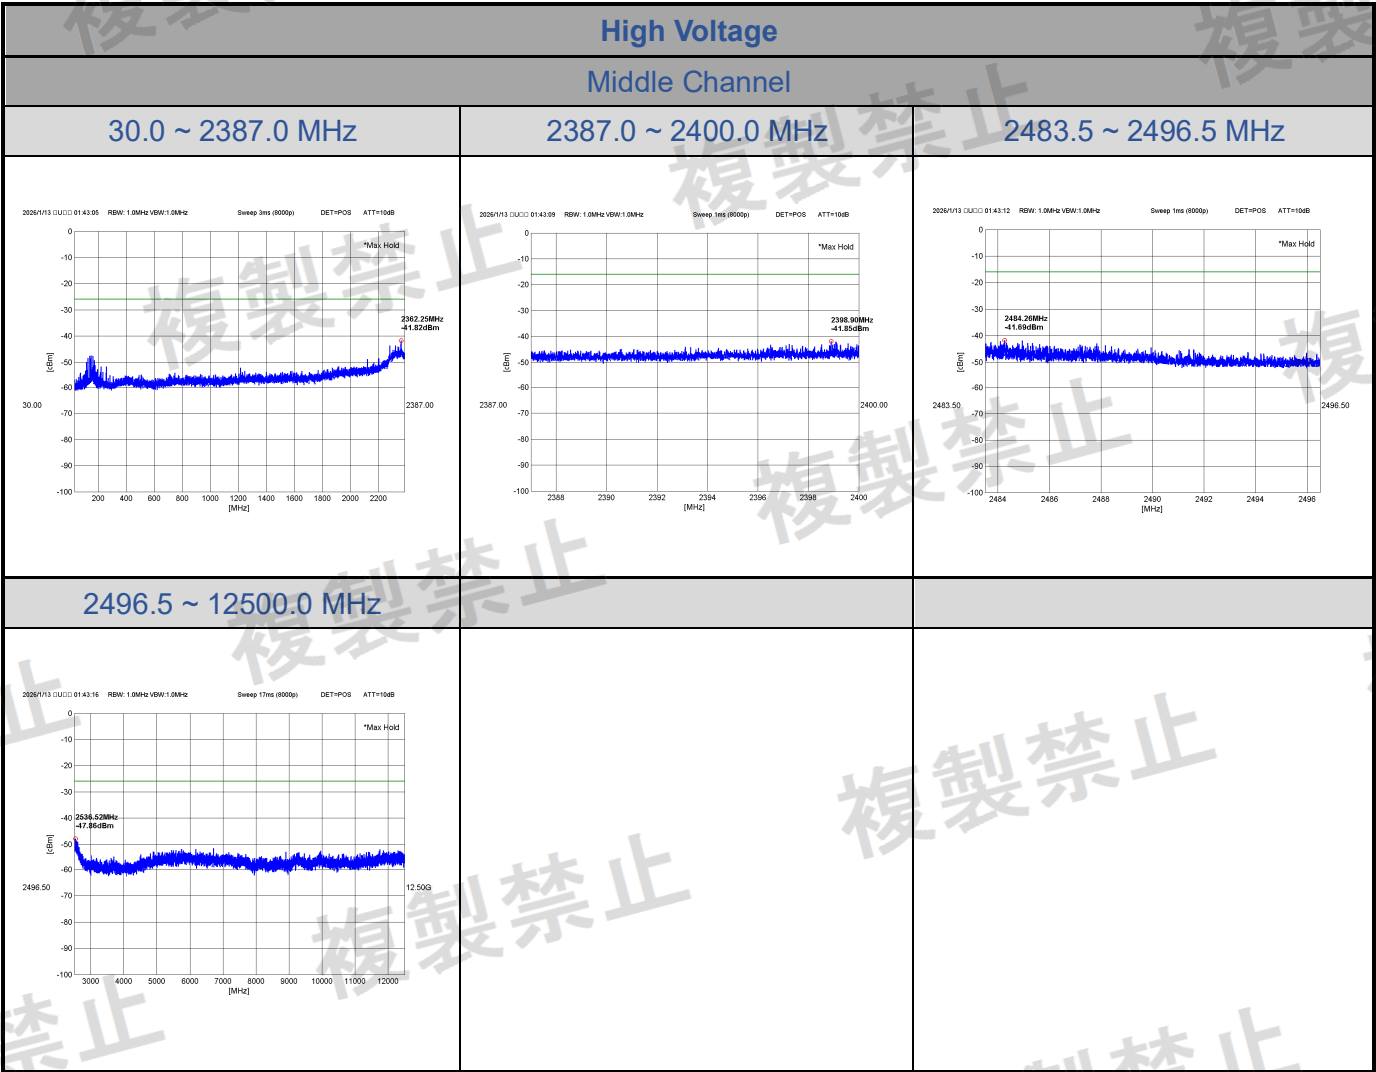


WiFi 2.4G Test Data


CN26VTXQ 001

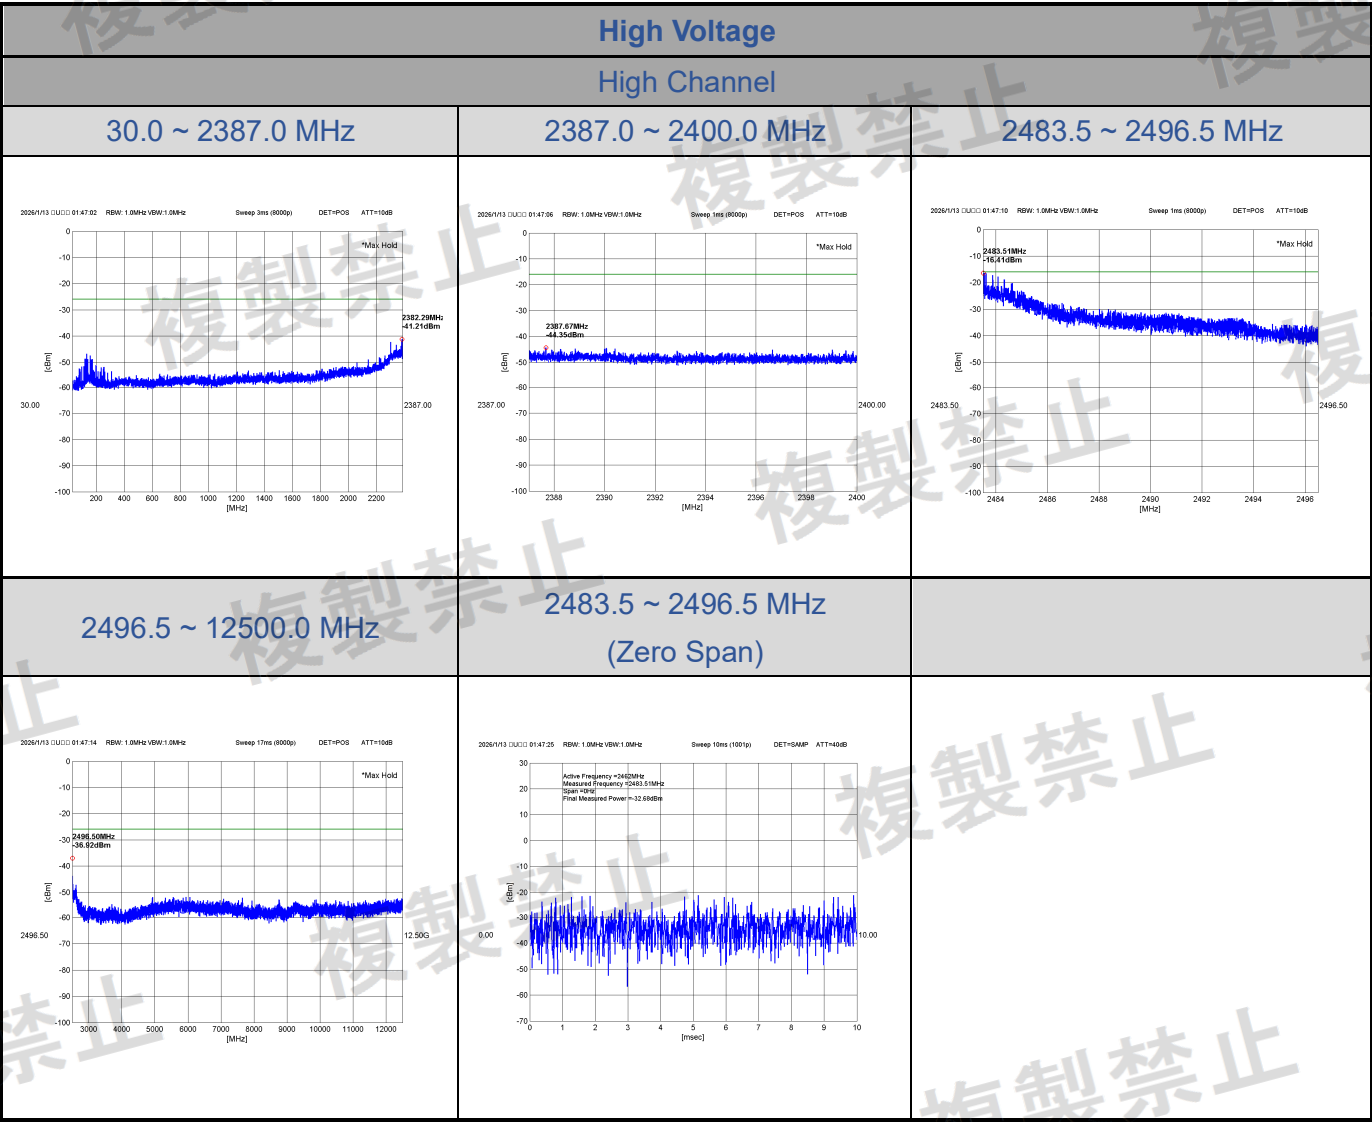

WiFi 2.4G Test Data


CN26VTXQ 001

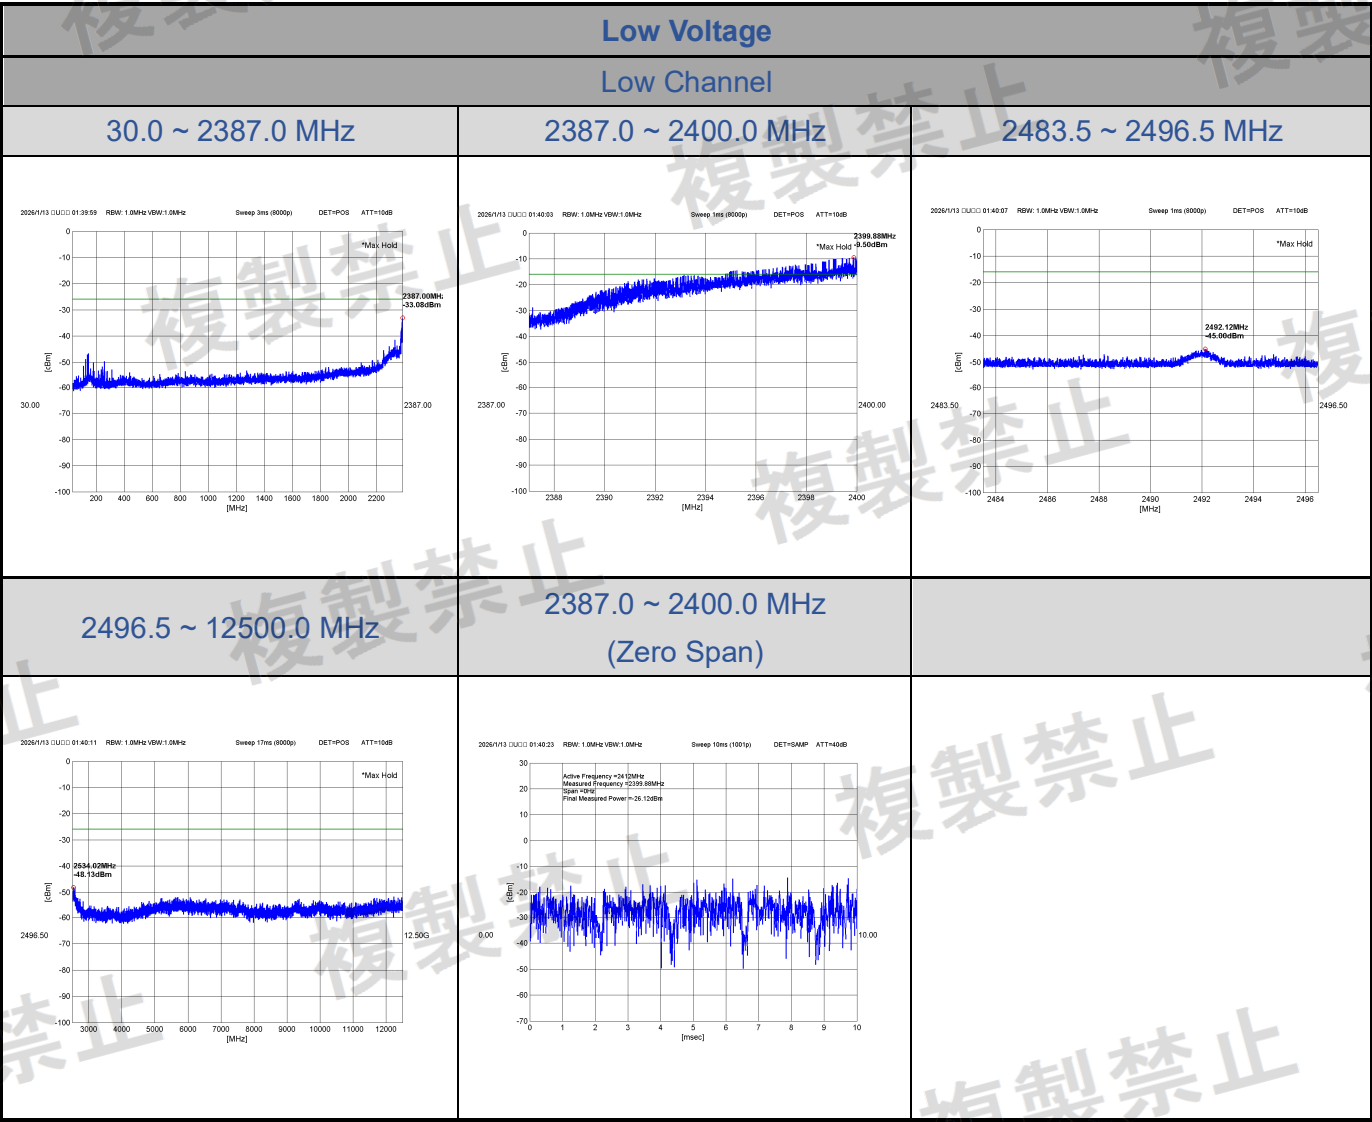

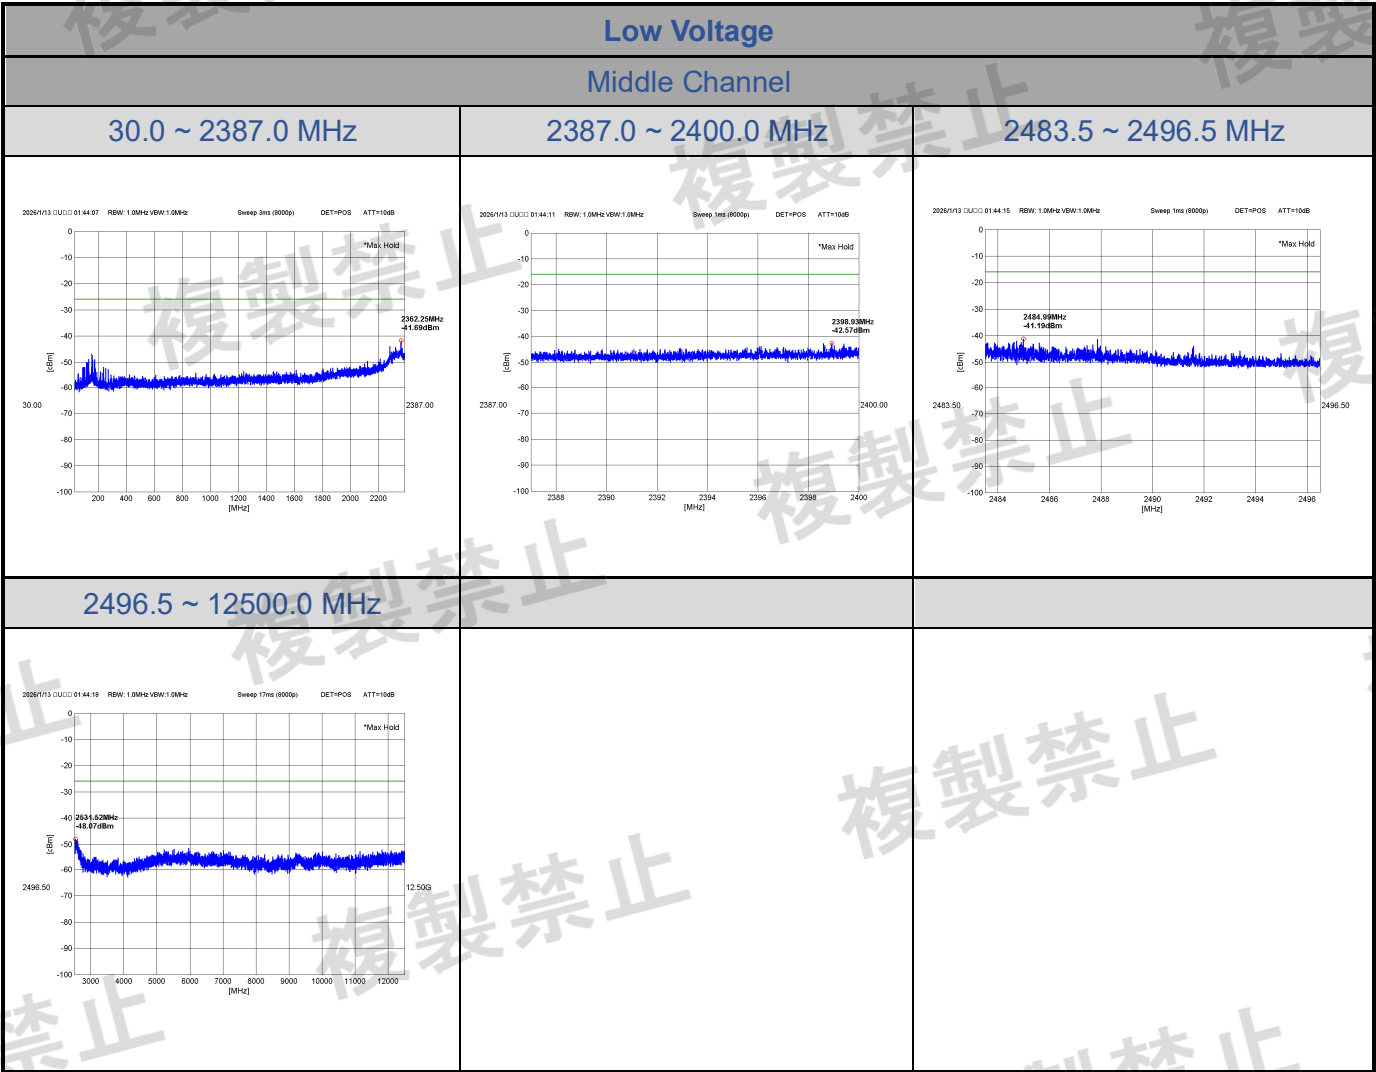

WiFi 2.4G Test Data

CN26VTXQ 001

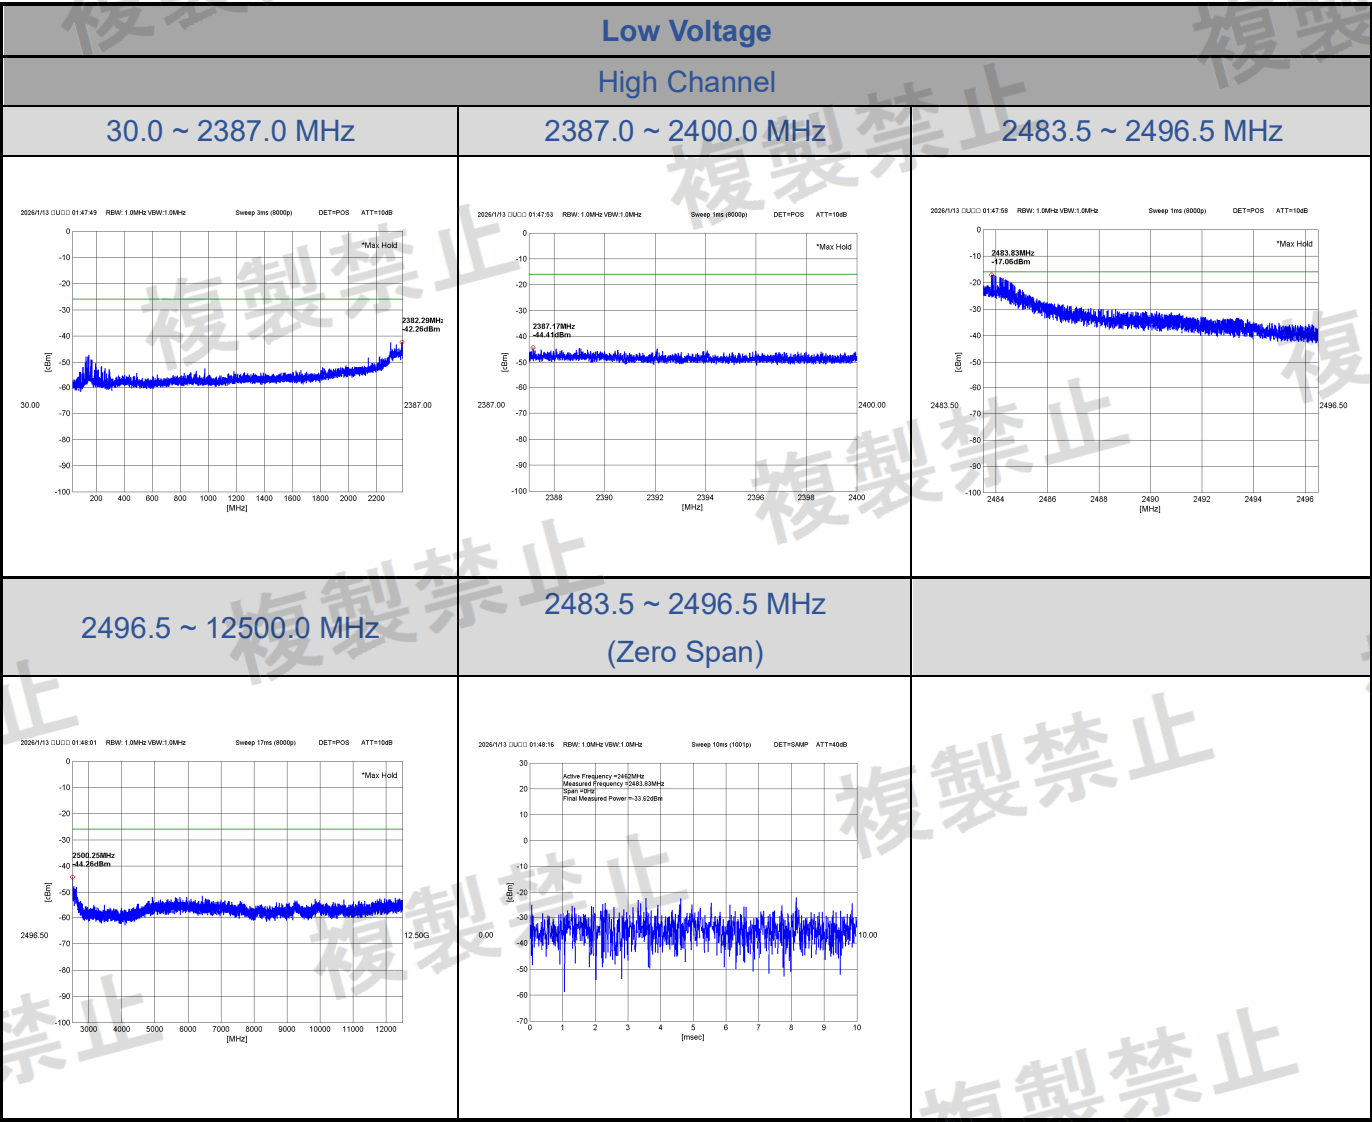



WiFi 2.4G Test Data

CN26VTXQ 001

802.11g:2TX


<Chain 1>

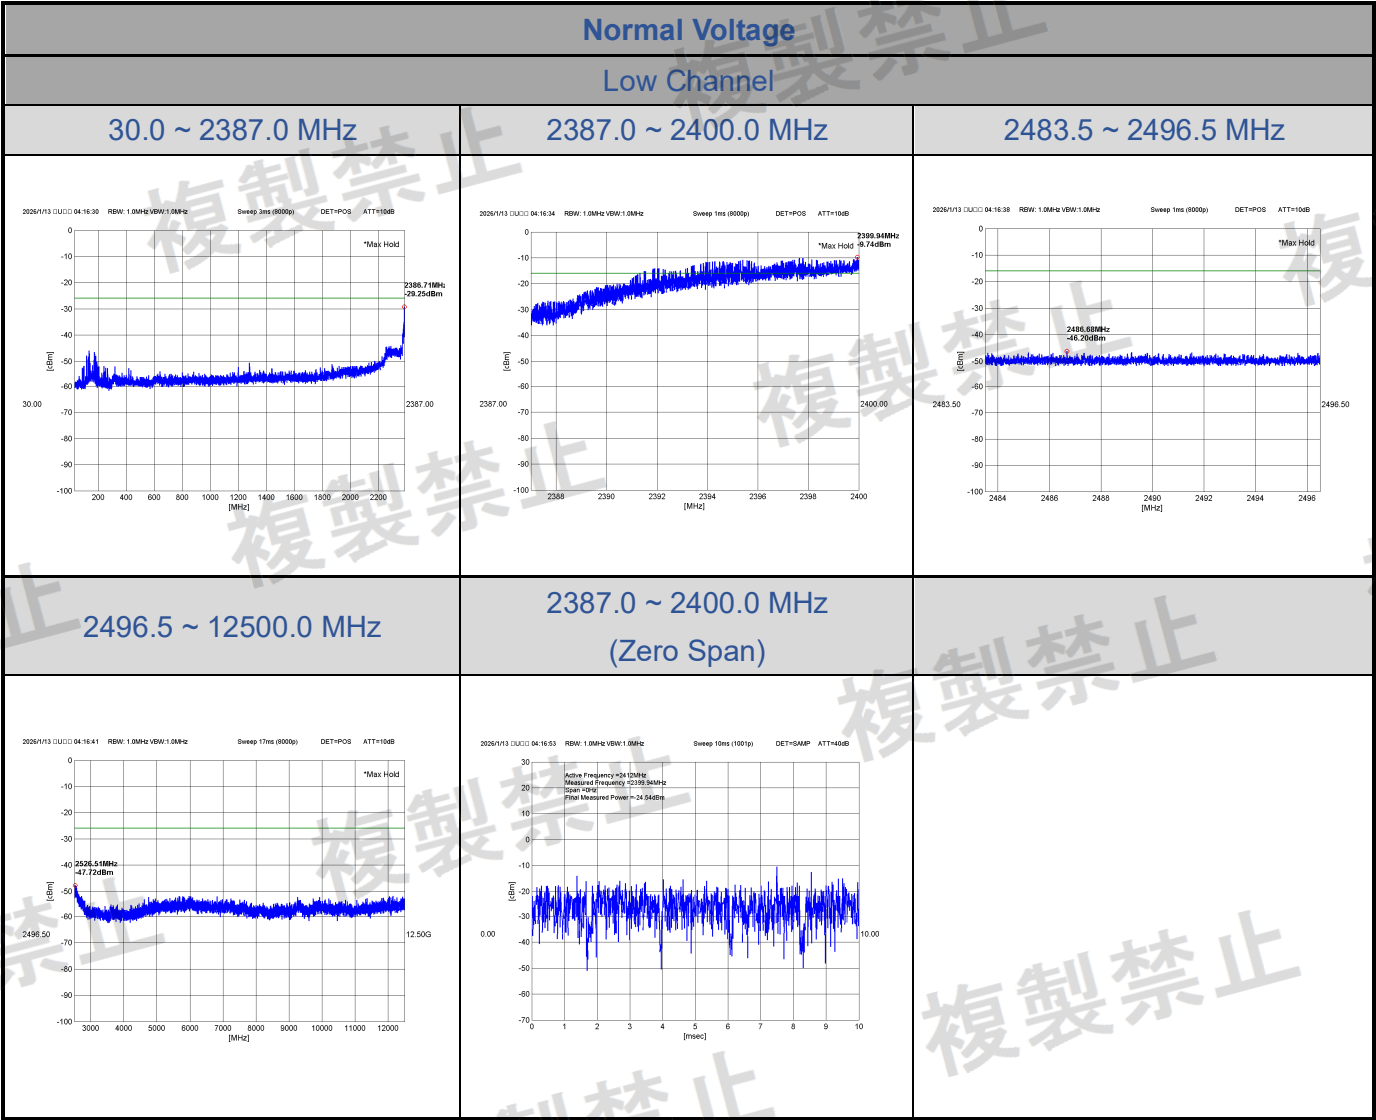

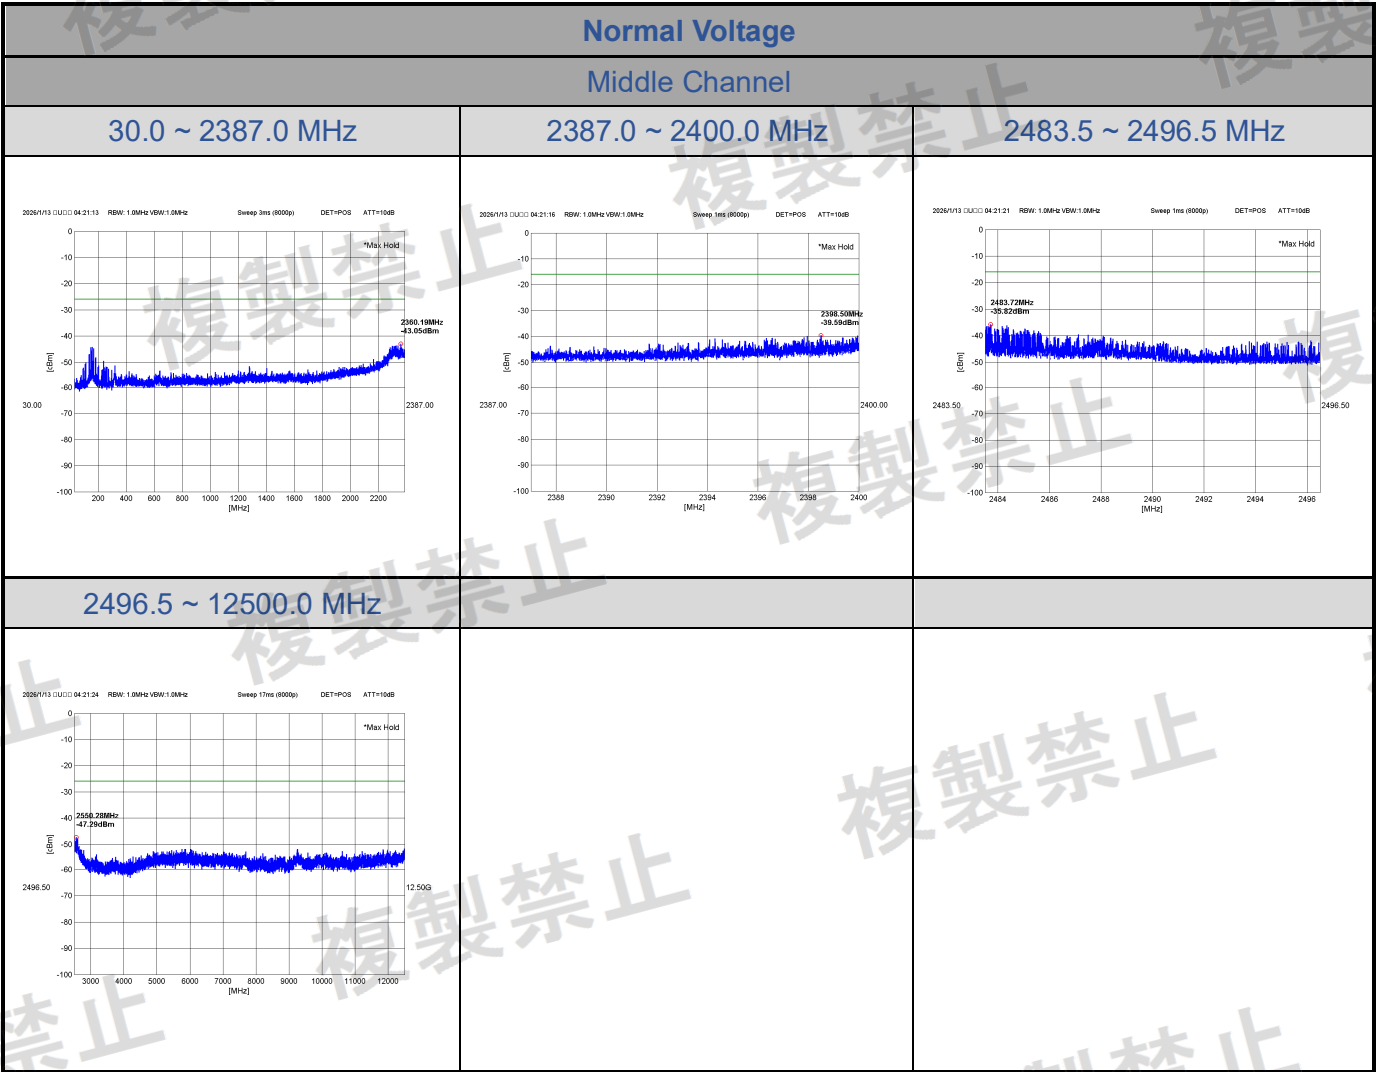


WiFi 2.4G Test Data


CN26VTXQ 001

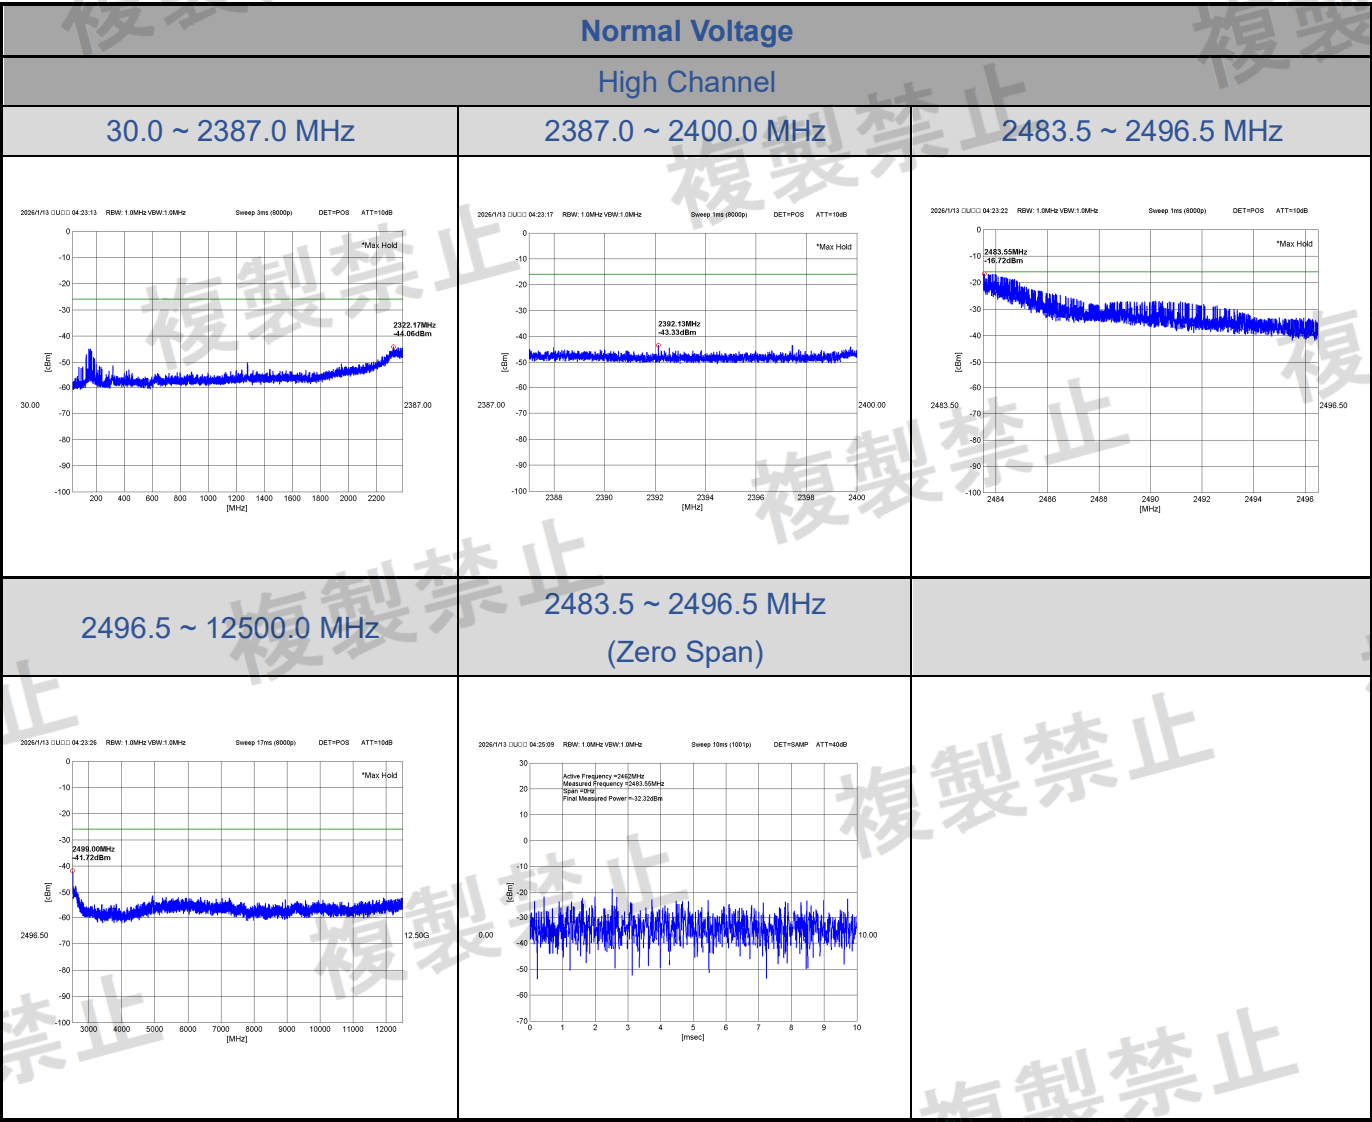

WiFi 2.4G Test Data


CN26VTXQ 001

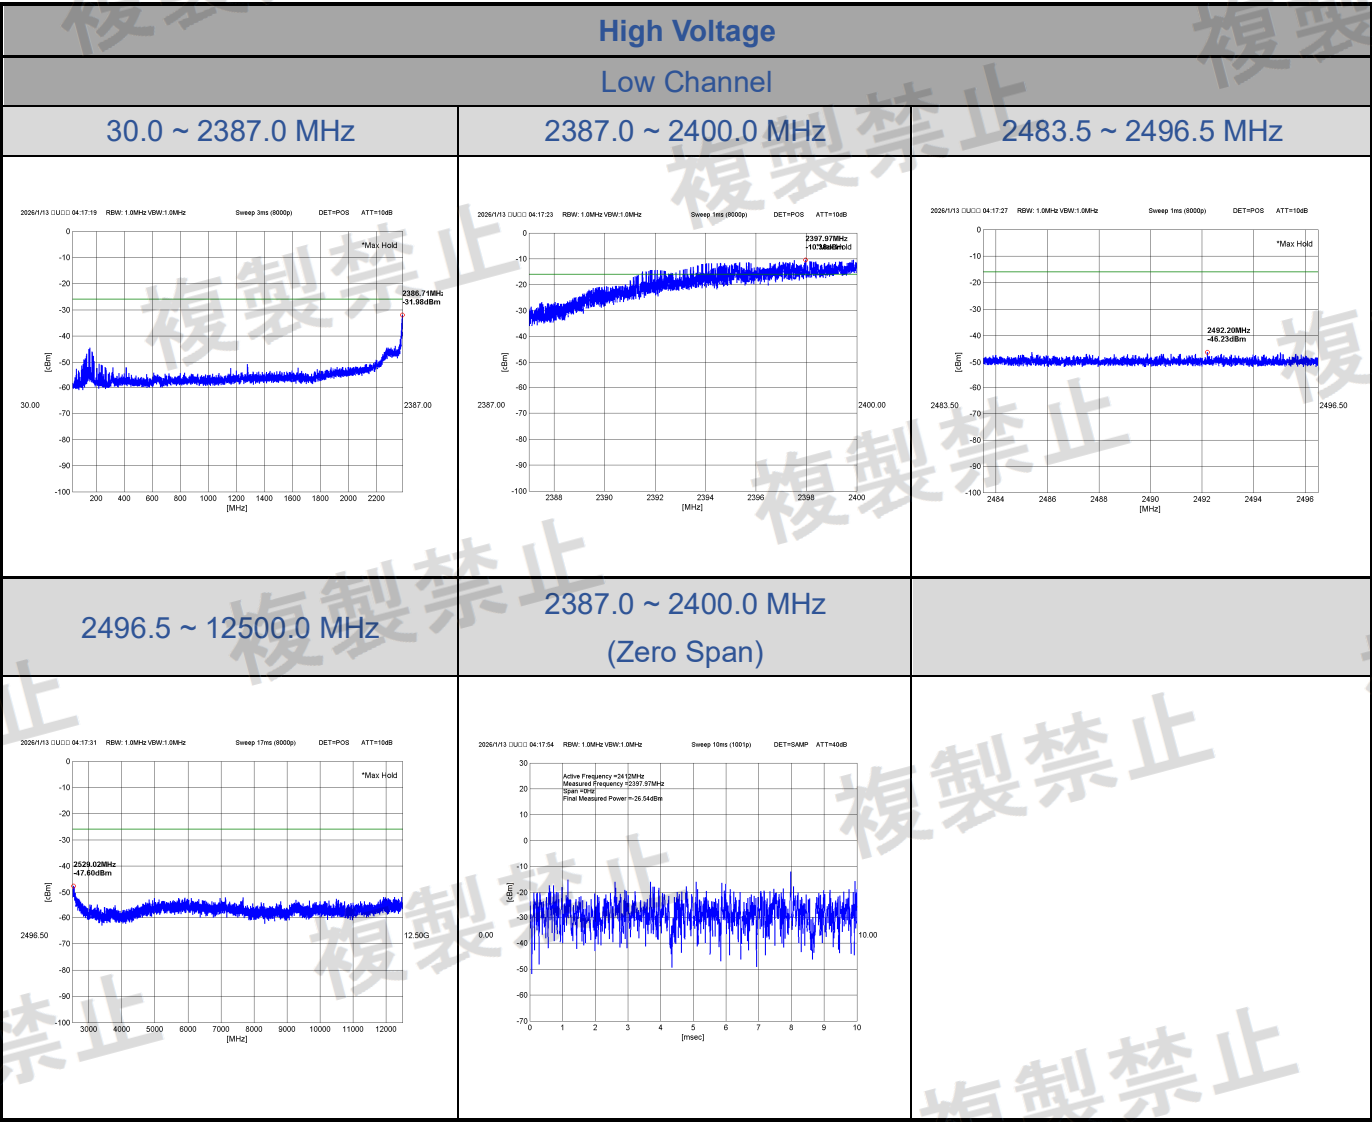

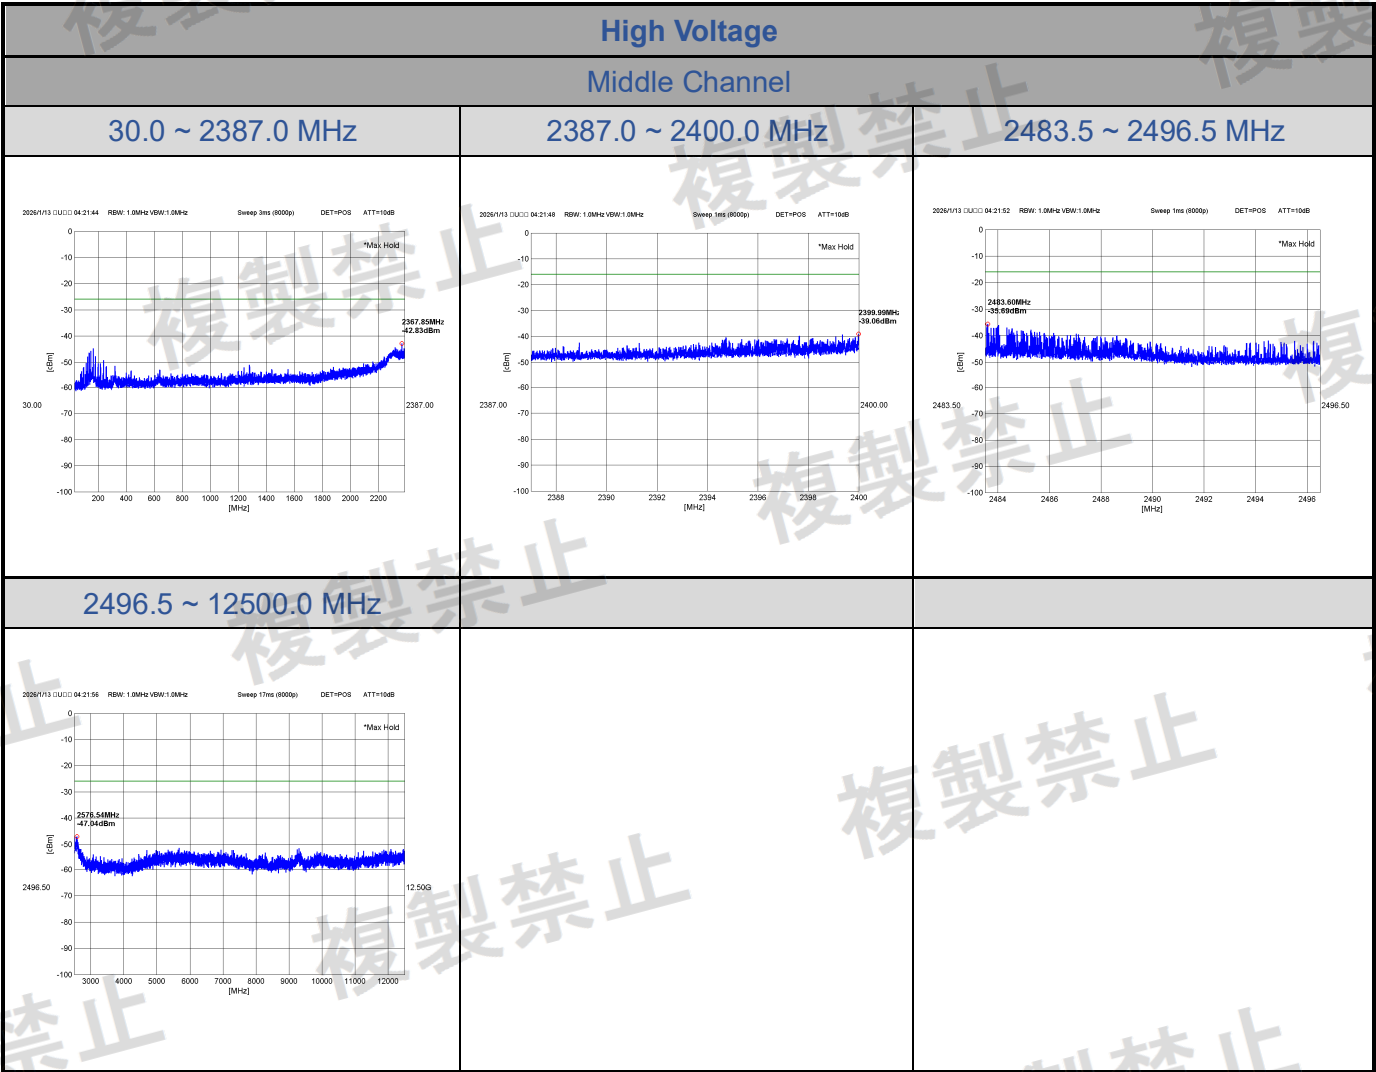


WiFi 2.4G Test Data


CN26VTXQ 001

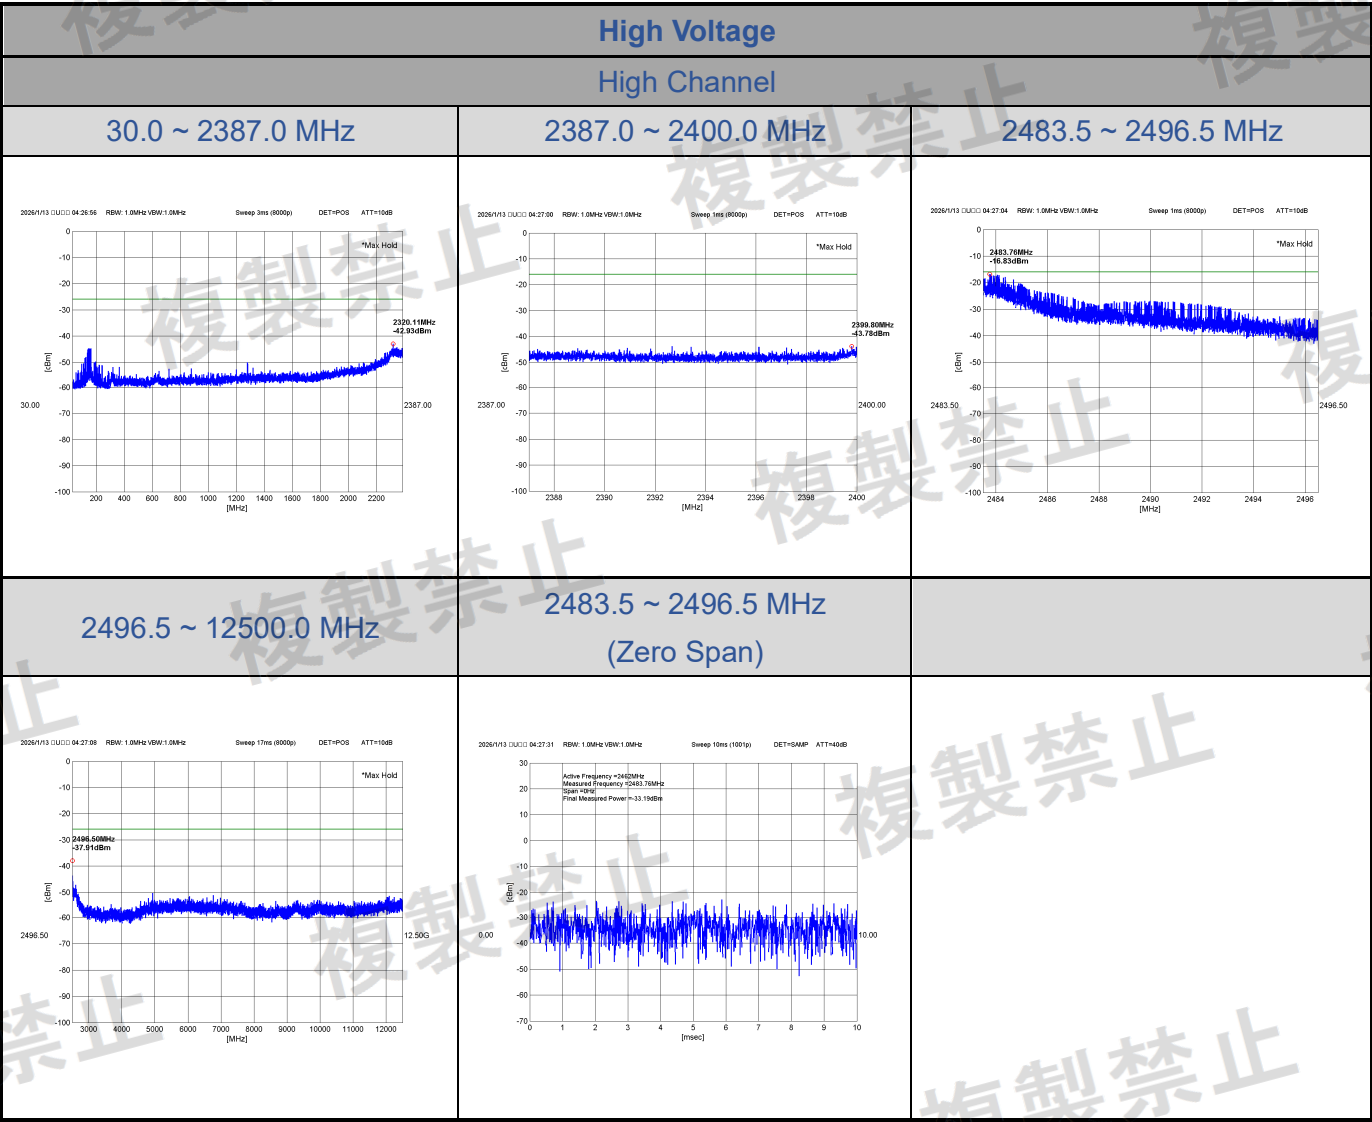

WiFi 2.4G Test Data


CN26VTXQ 001

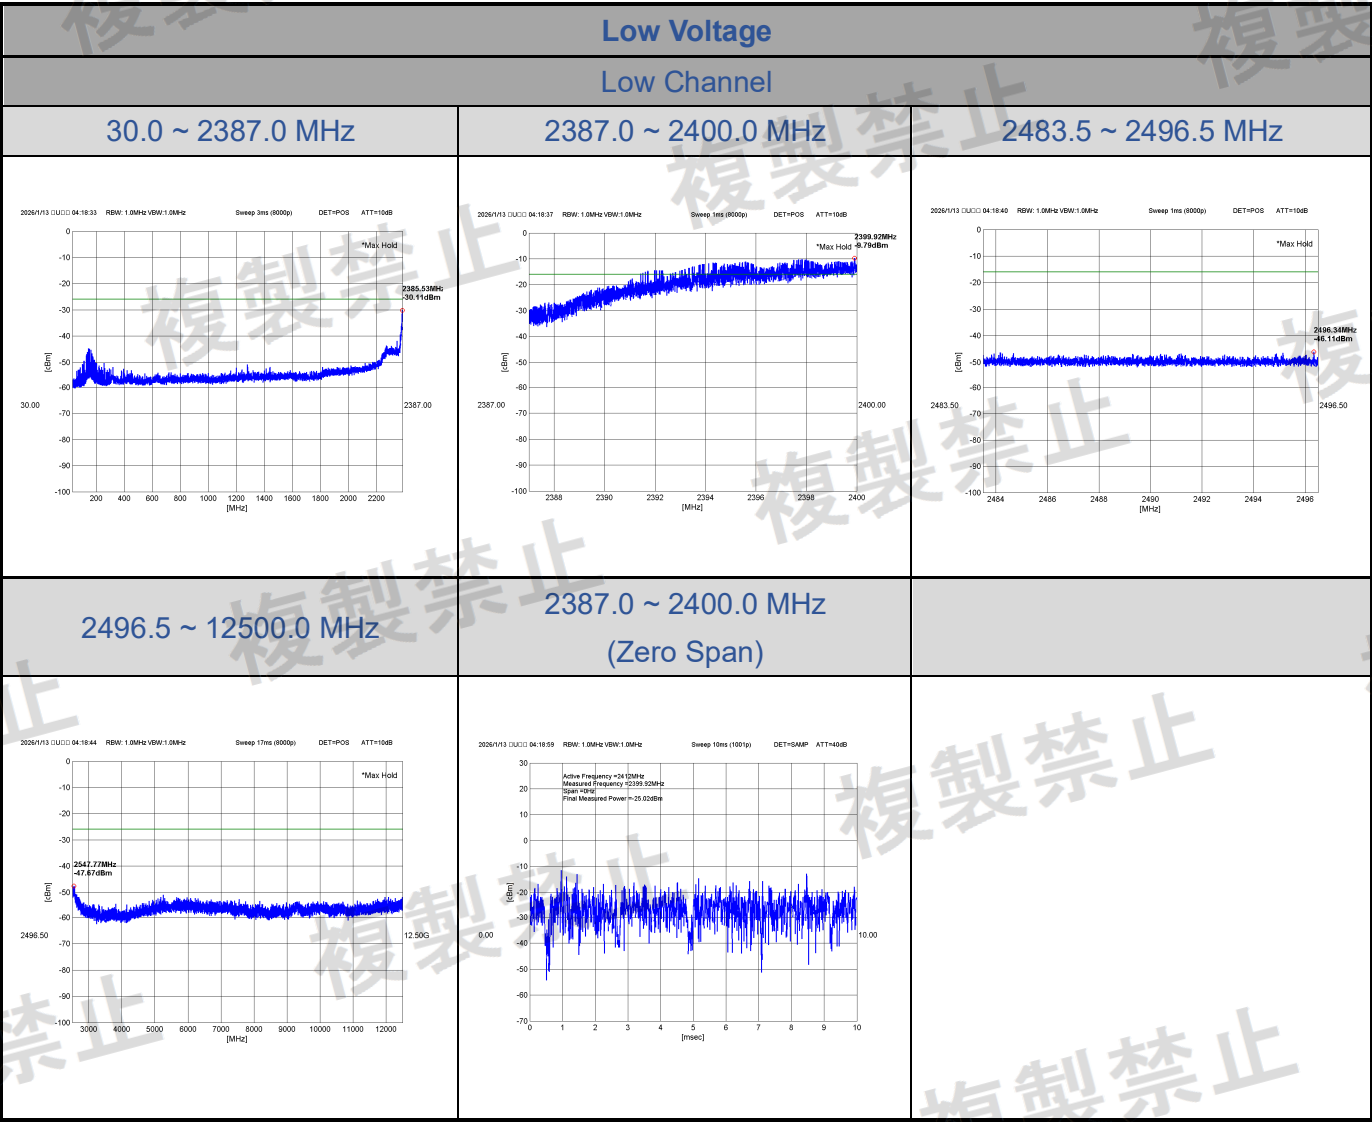

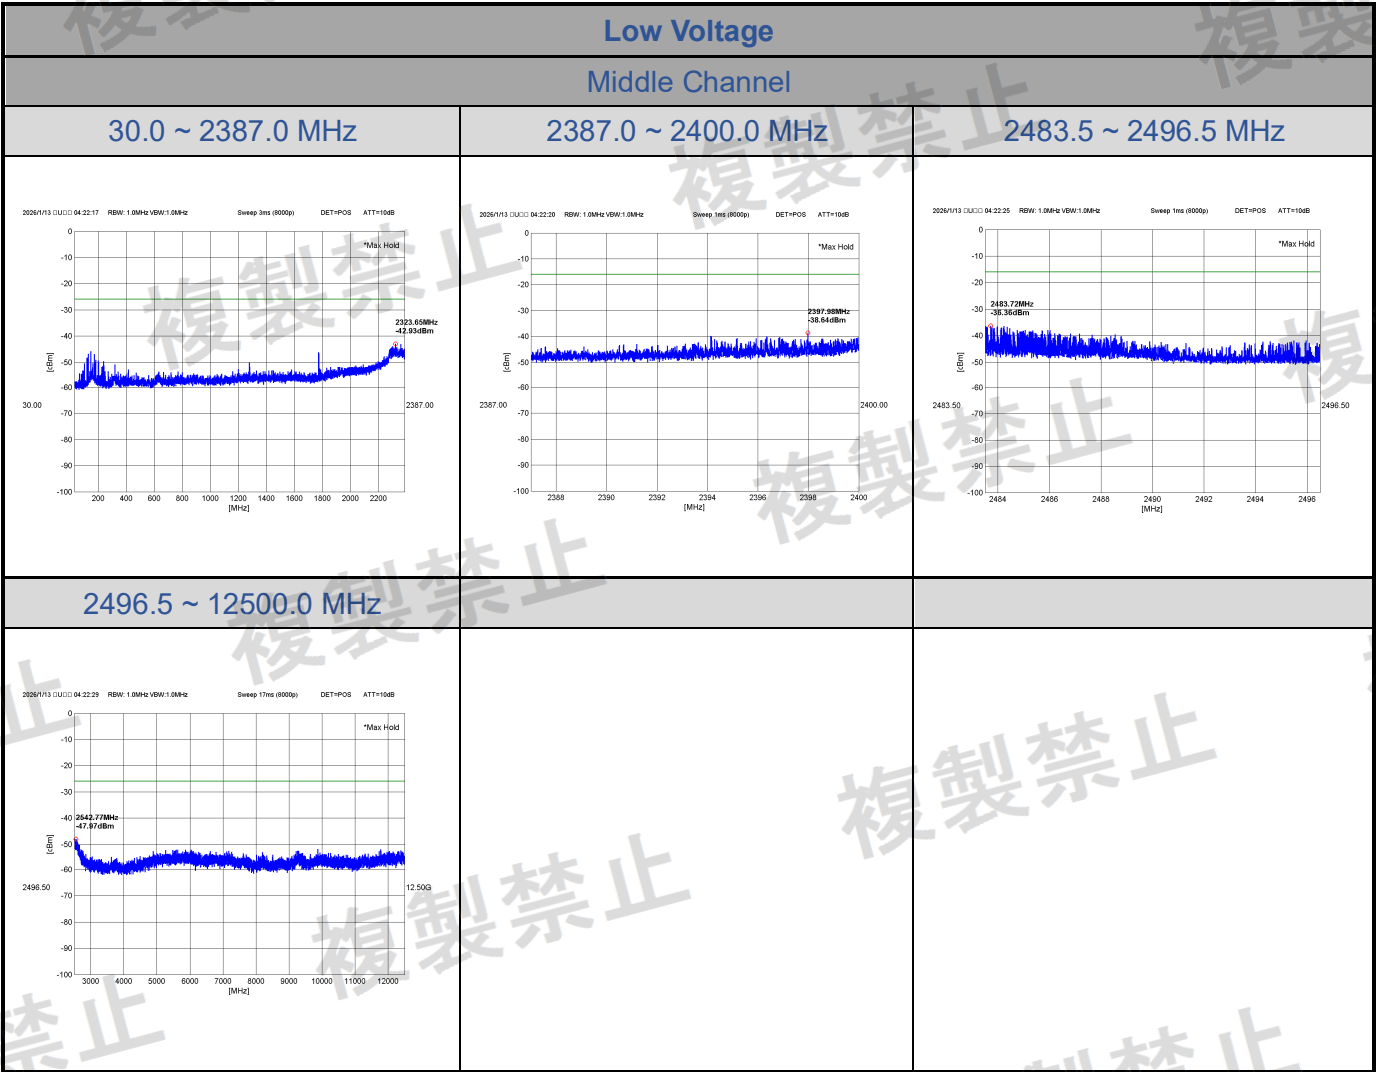

WiFi 2.4G Test Data

CN26VTXQ 001

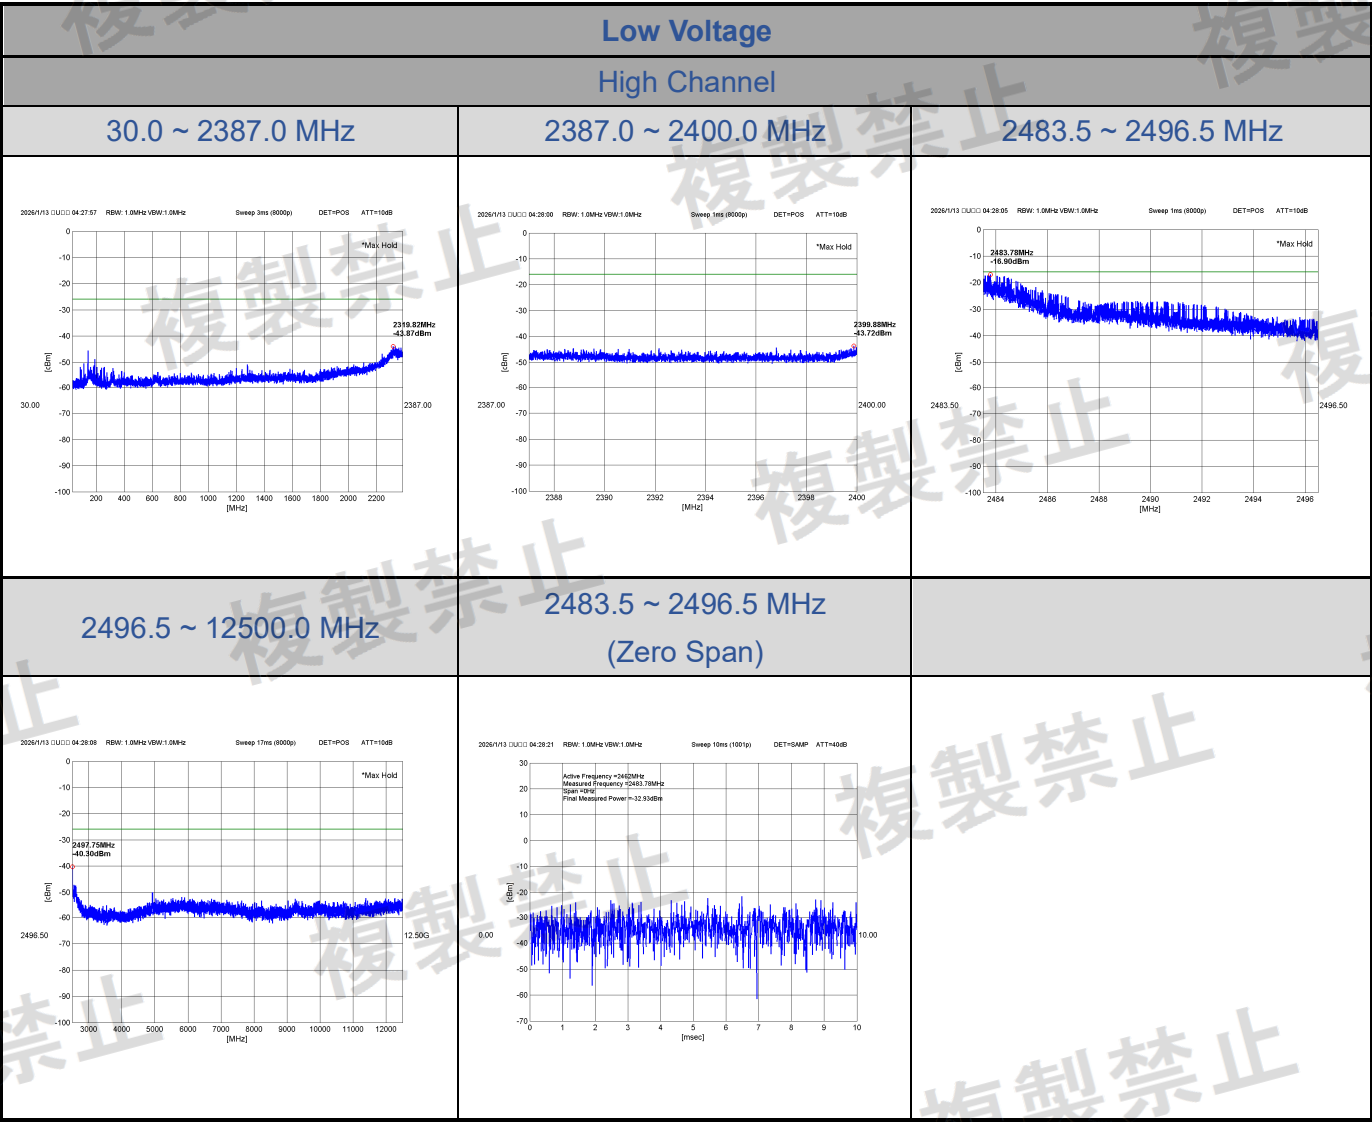



WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT20:2TX


<Chain 0>

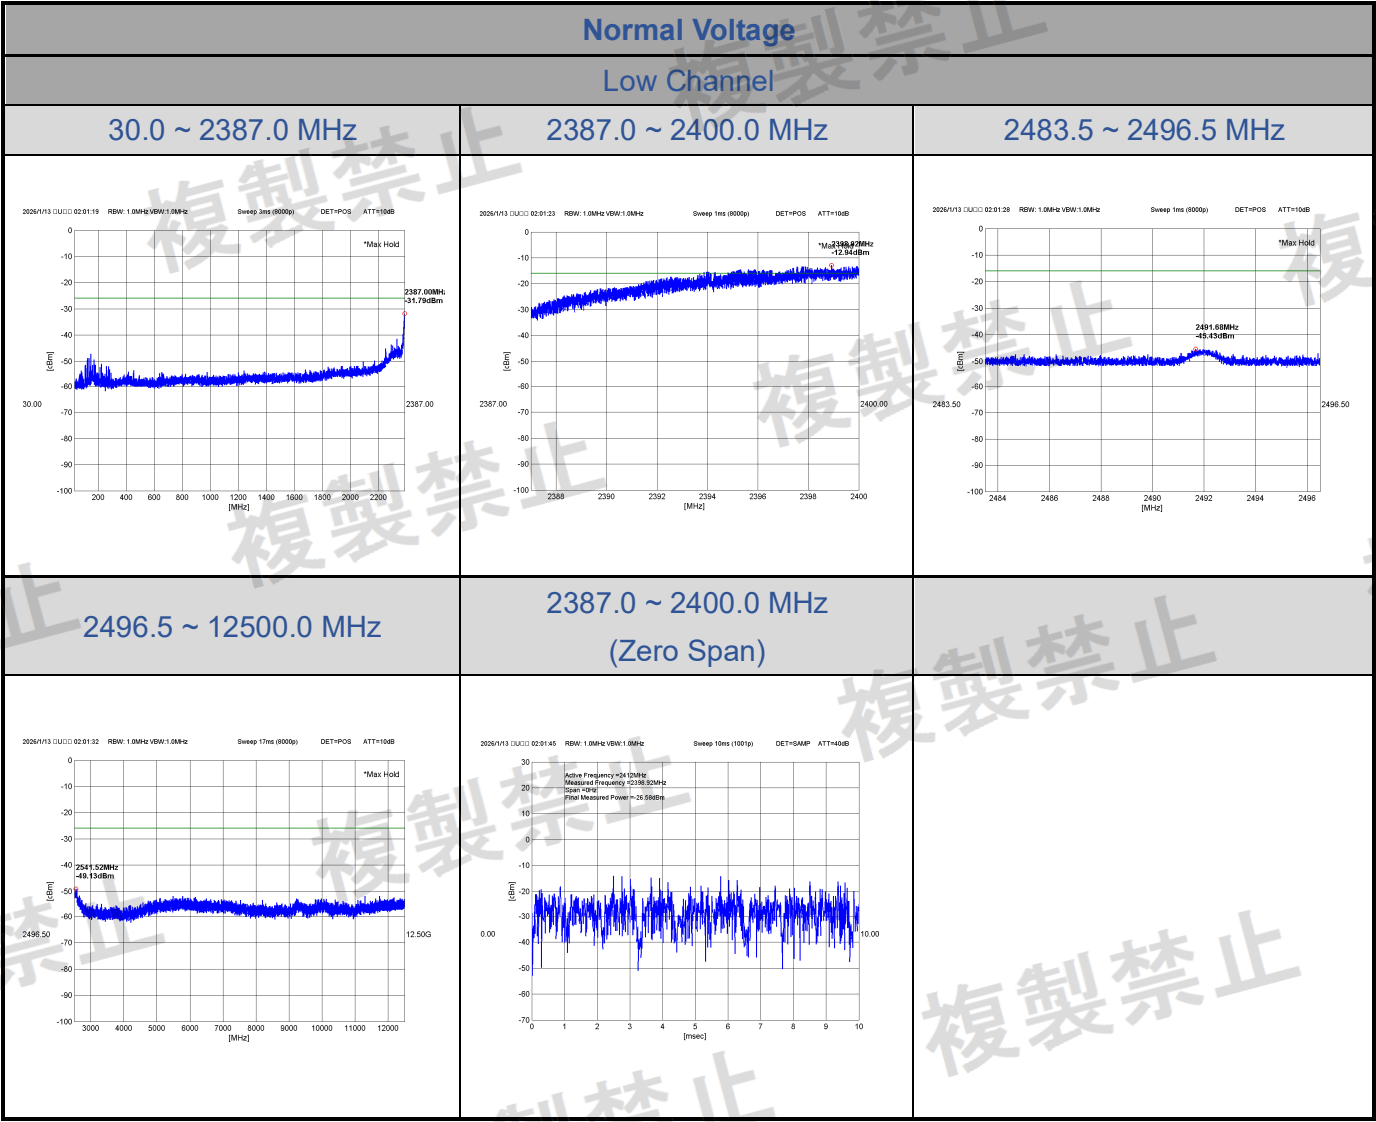

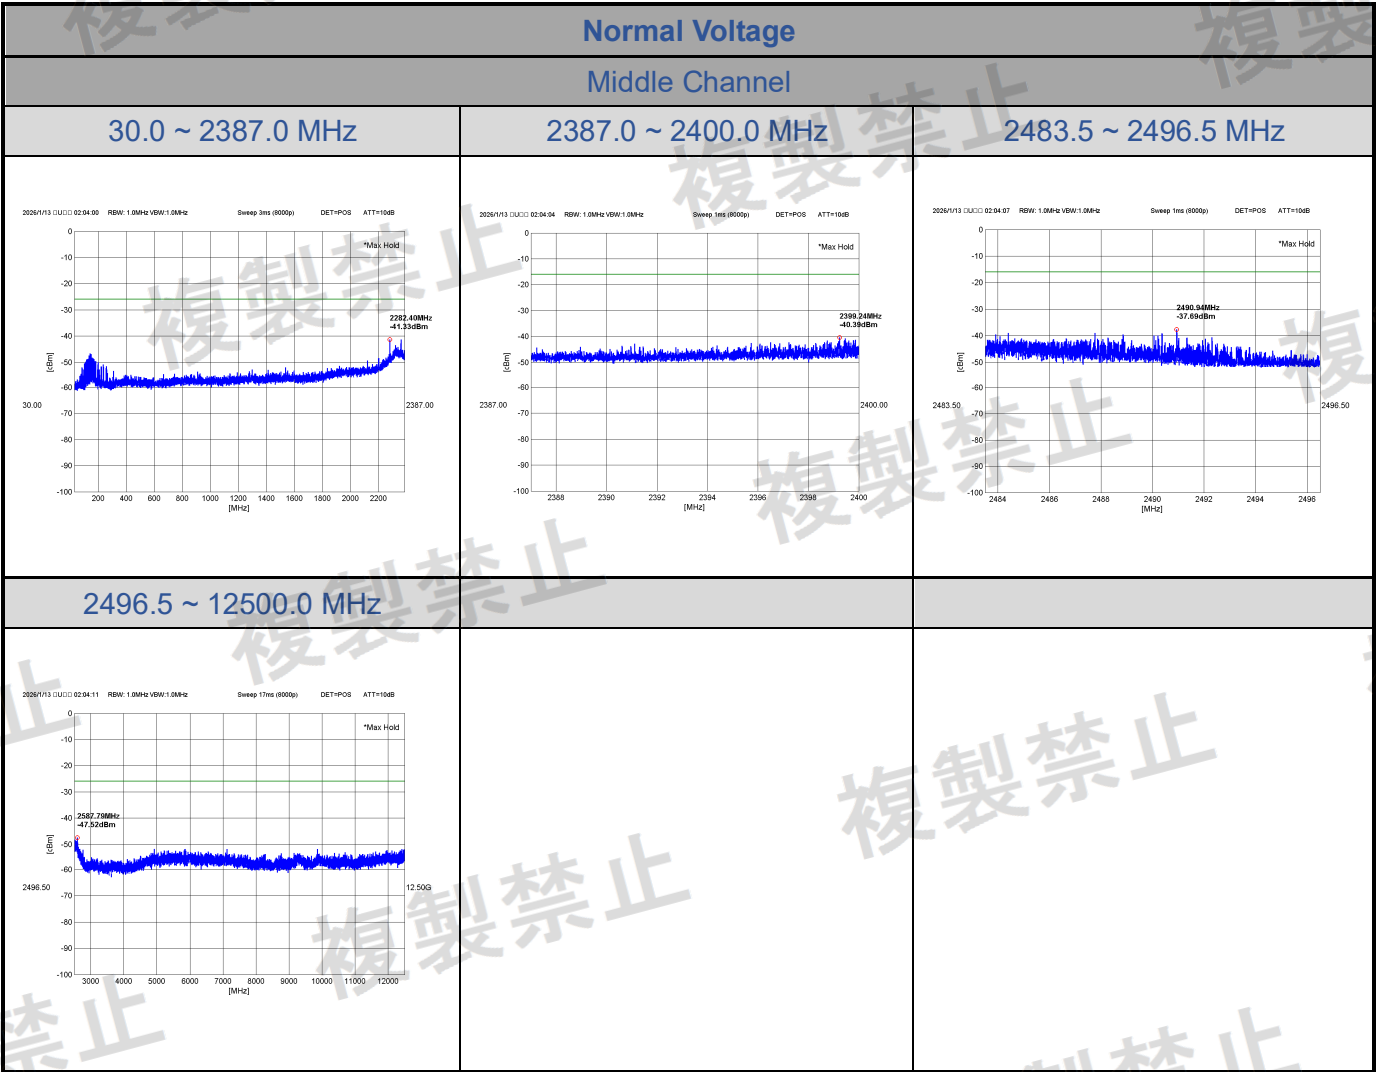


WiFi 2.4G Test Data


CN26VTXQ 001

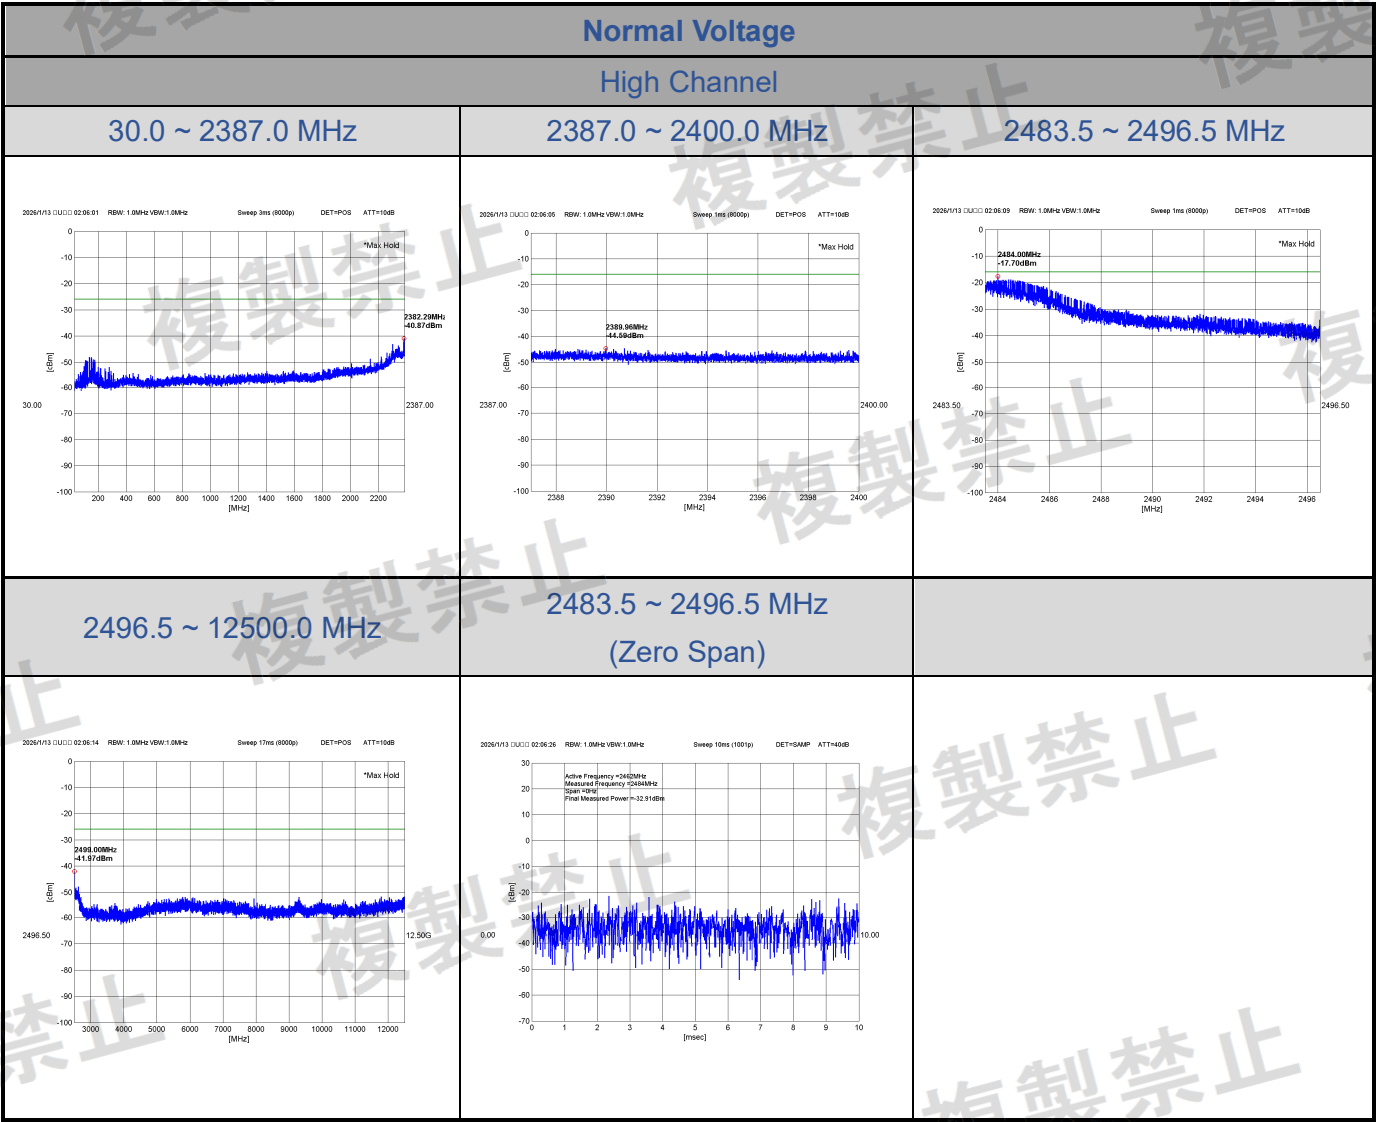

WiFi 2.4G Test Data


CN26VTXQ 001

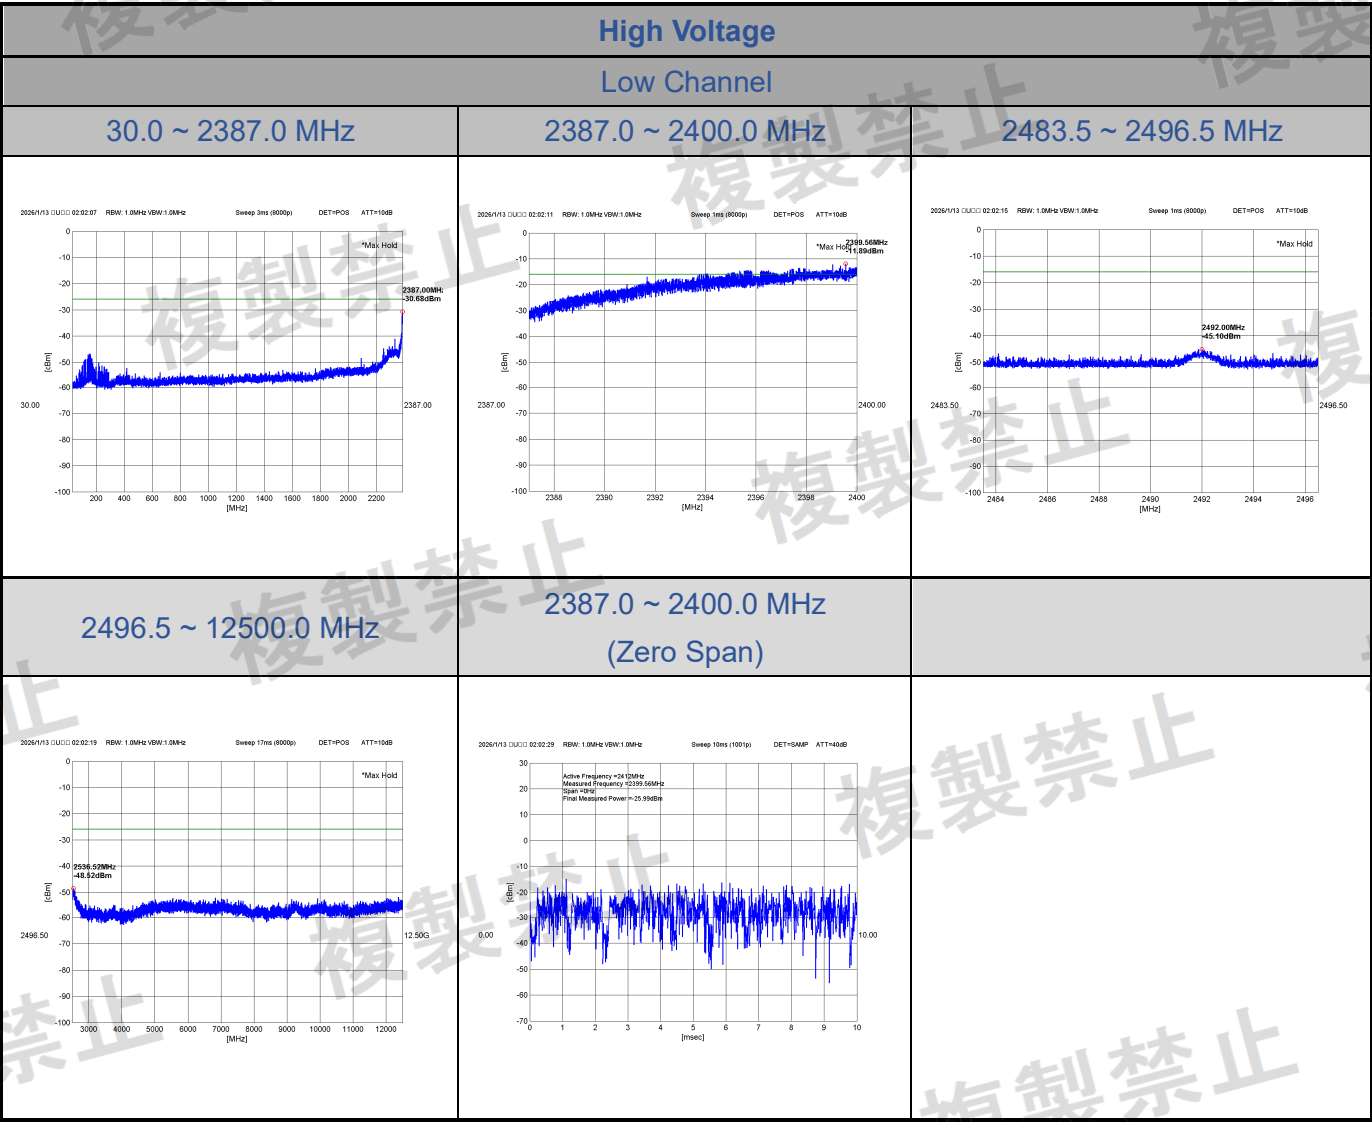

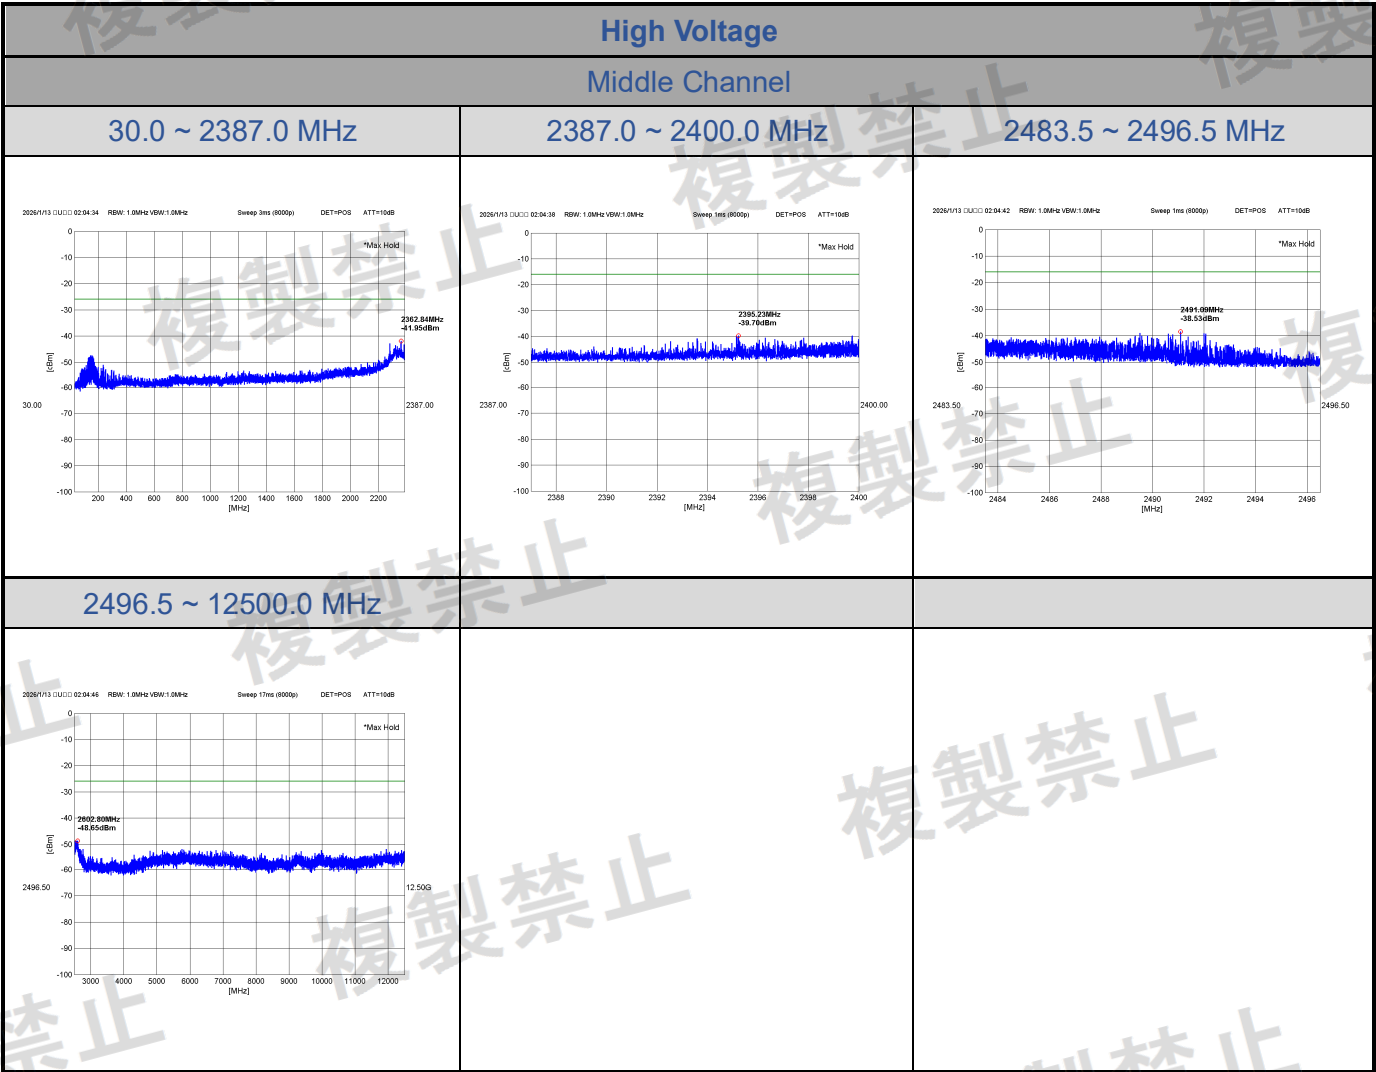


WiFi 2.4G Test Data


CN26VTXQ 001

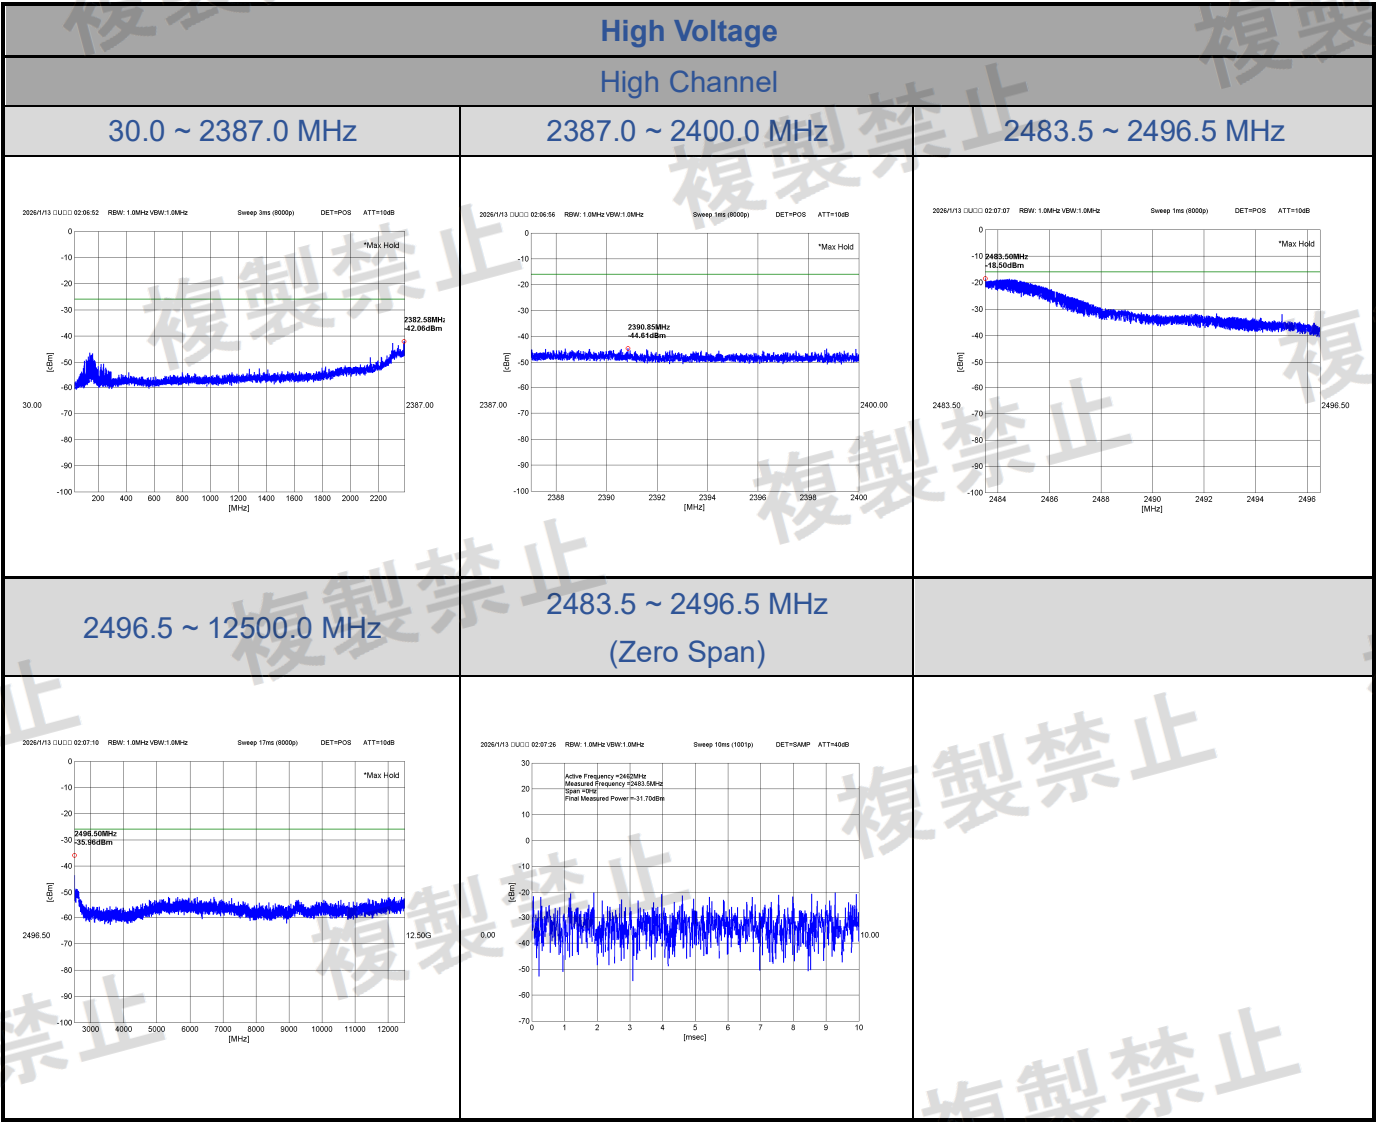

WiFi 2.4G Test Data


CN26VTXQ 001

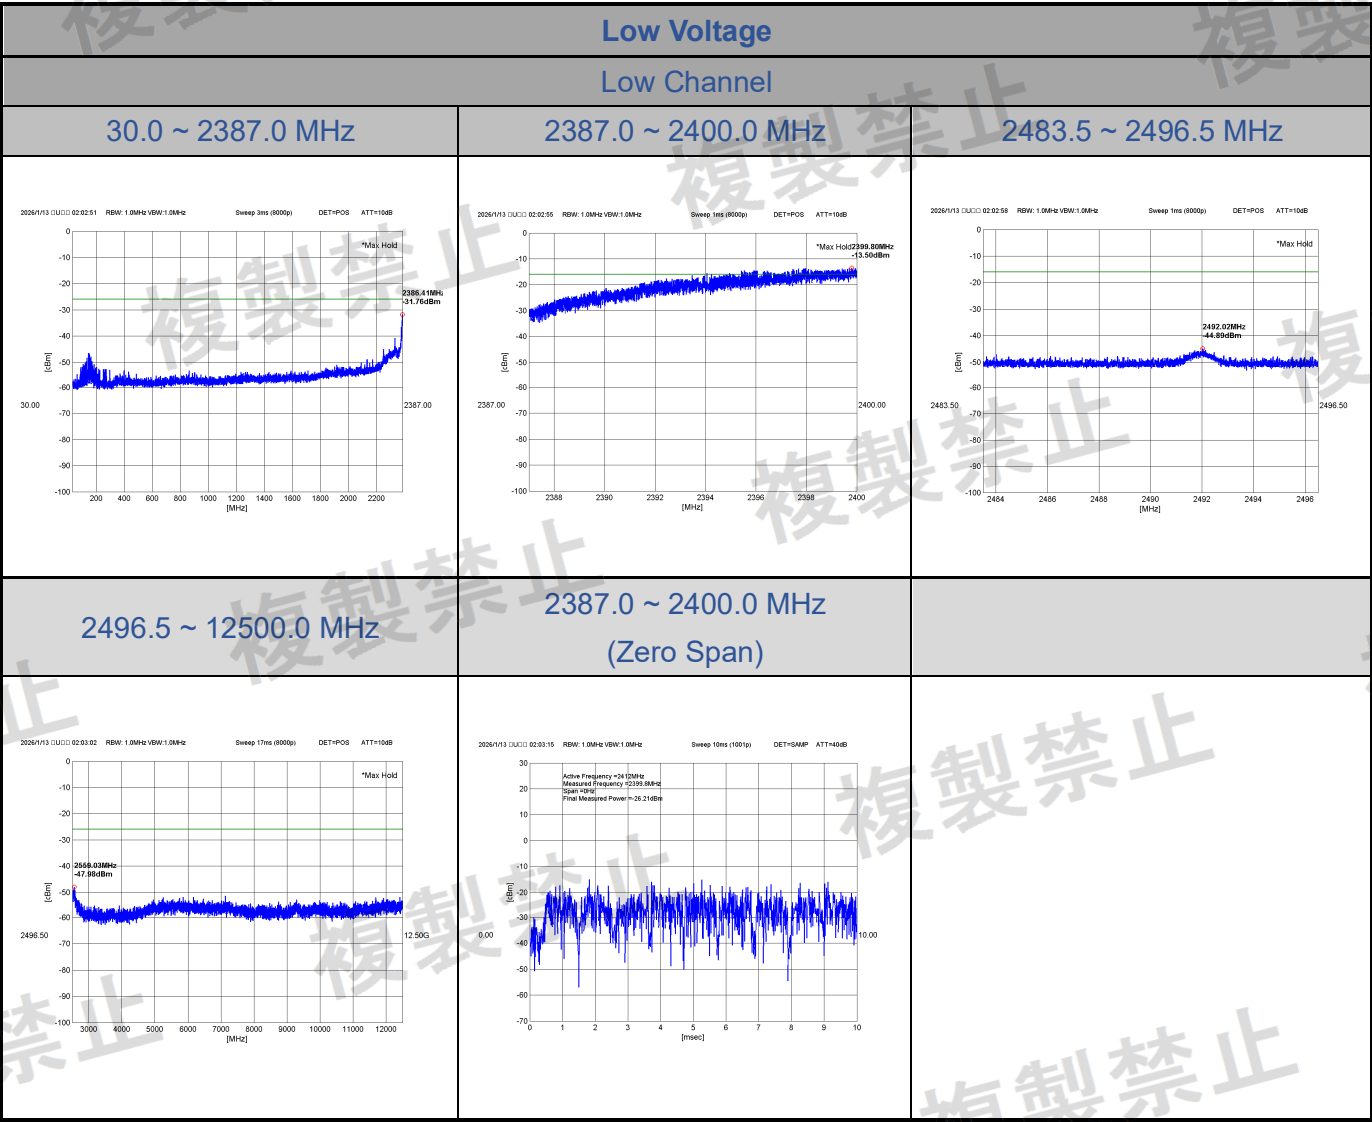

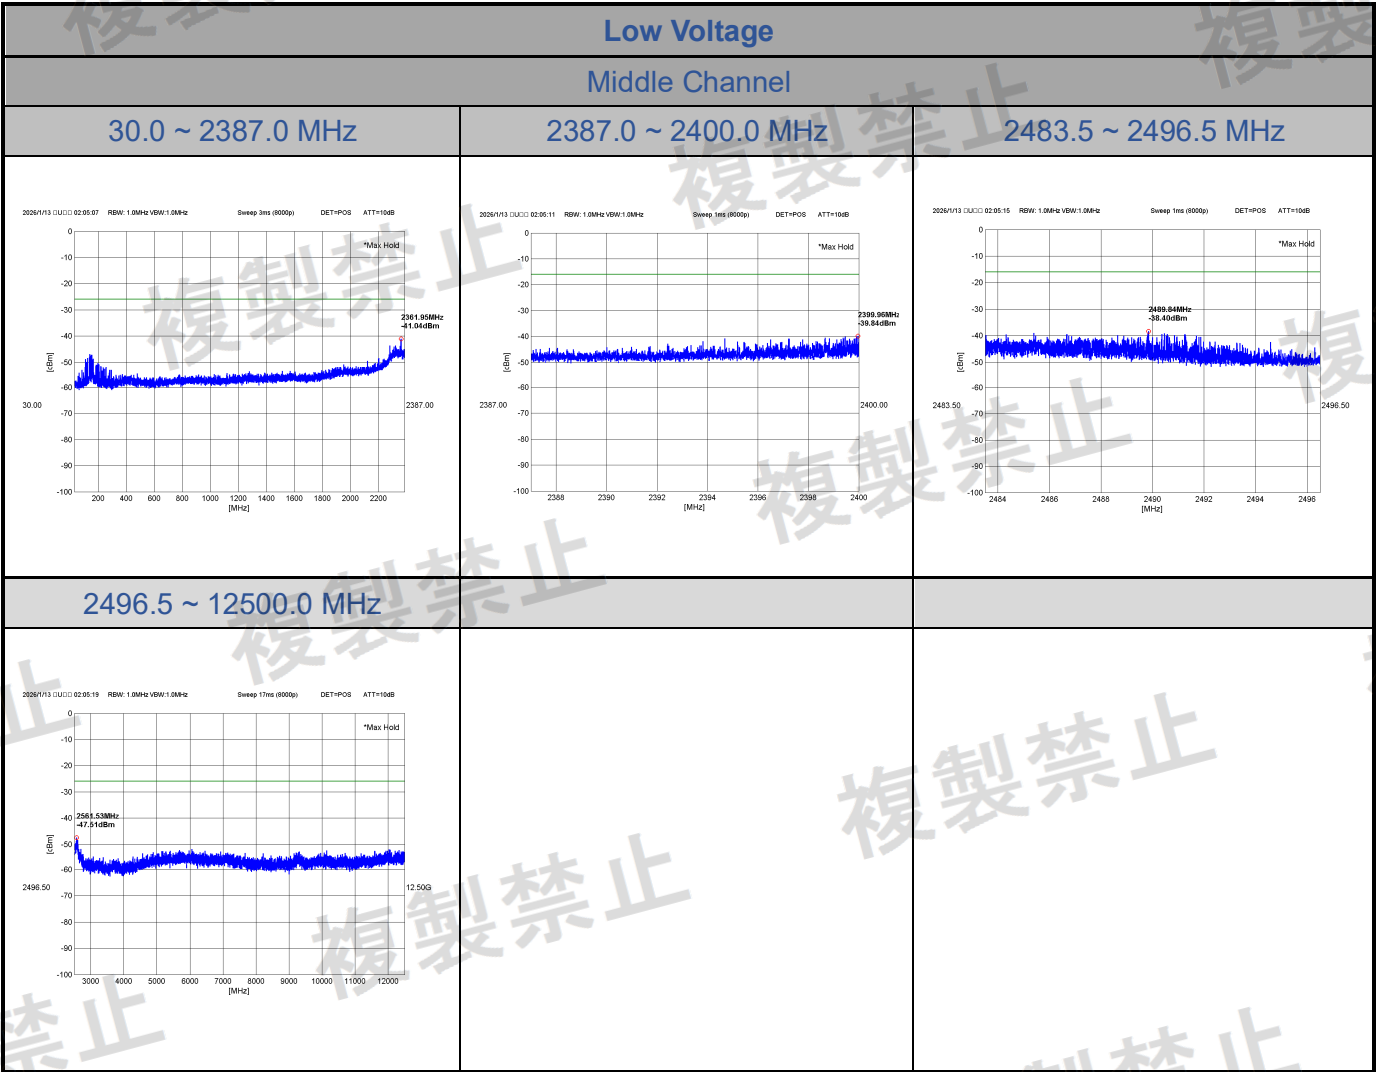

WiFi 2.4G Test Data

CN26VTXQ 001

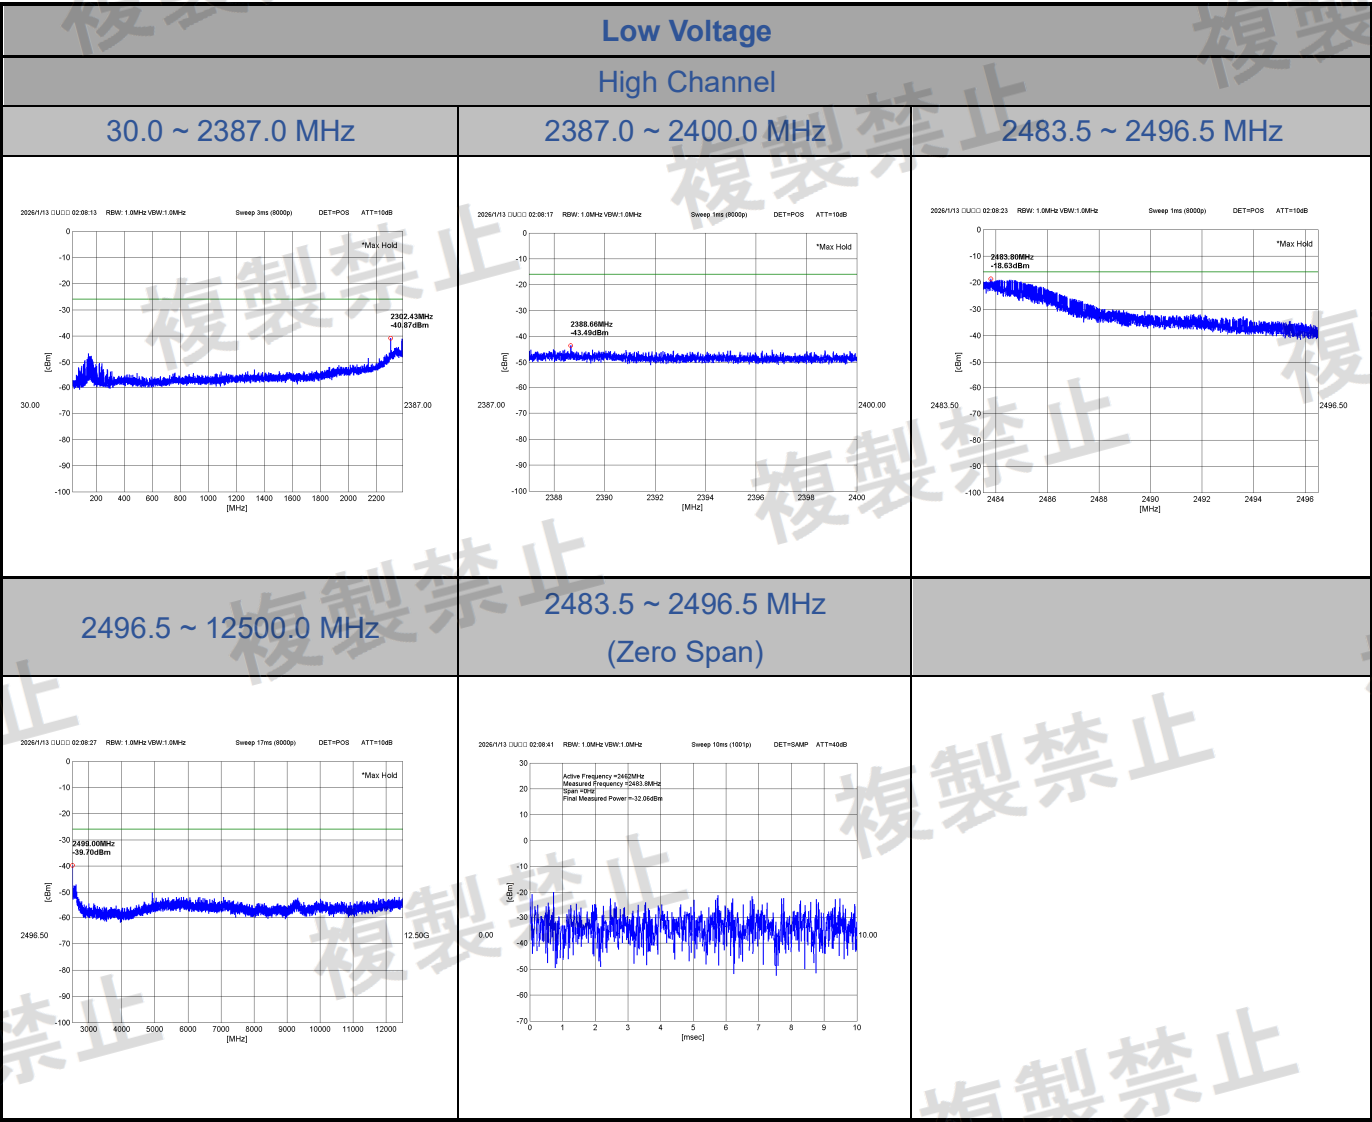



WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT20:2TX


<Chain 1>

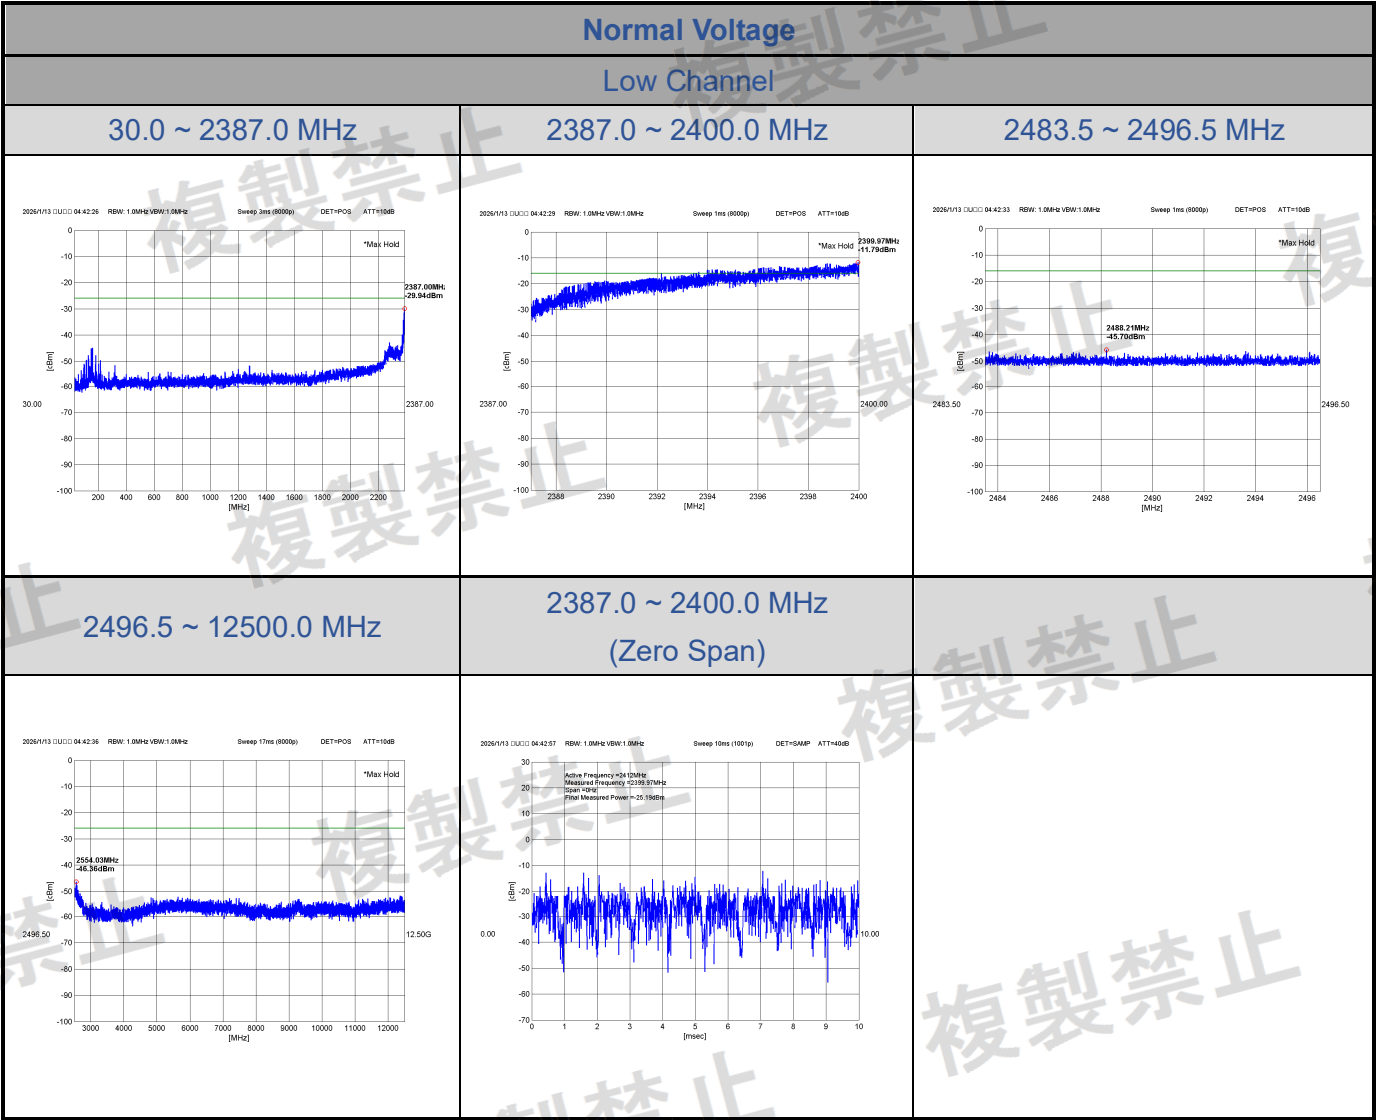

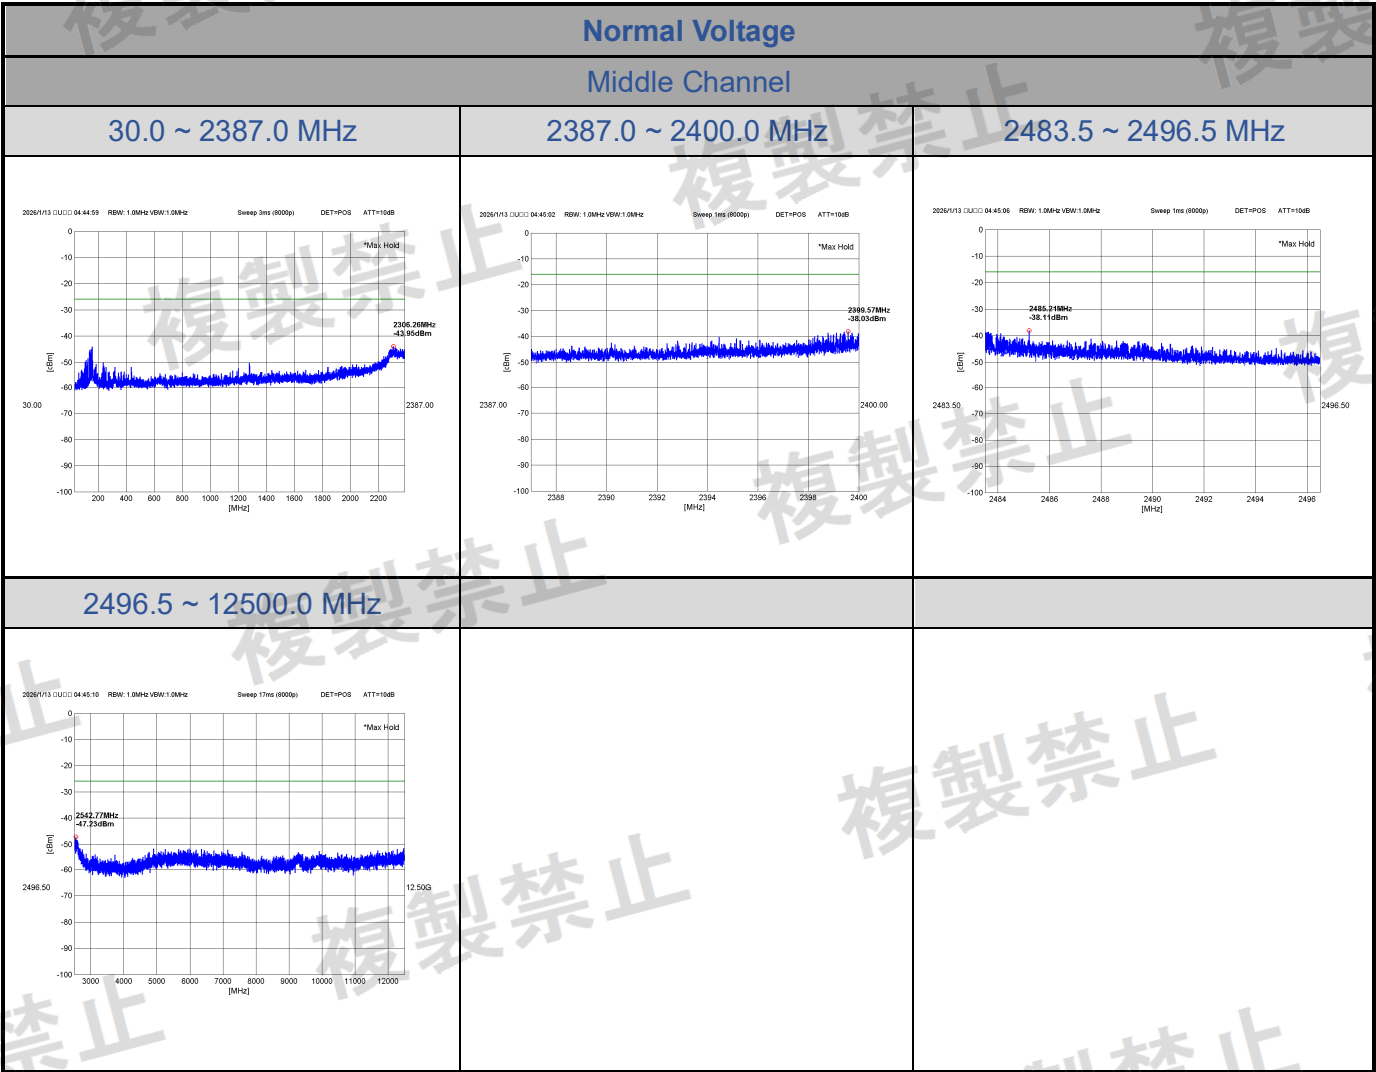


WiFi 2.4G Test Data


CN26VTXQ 001

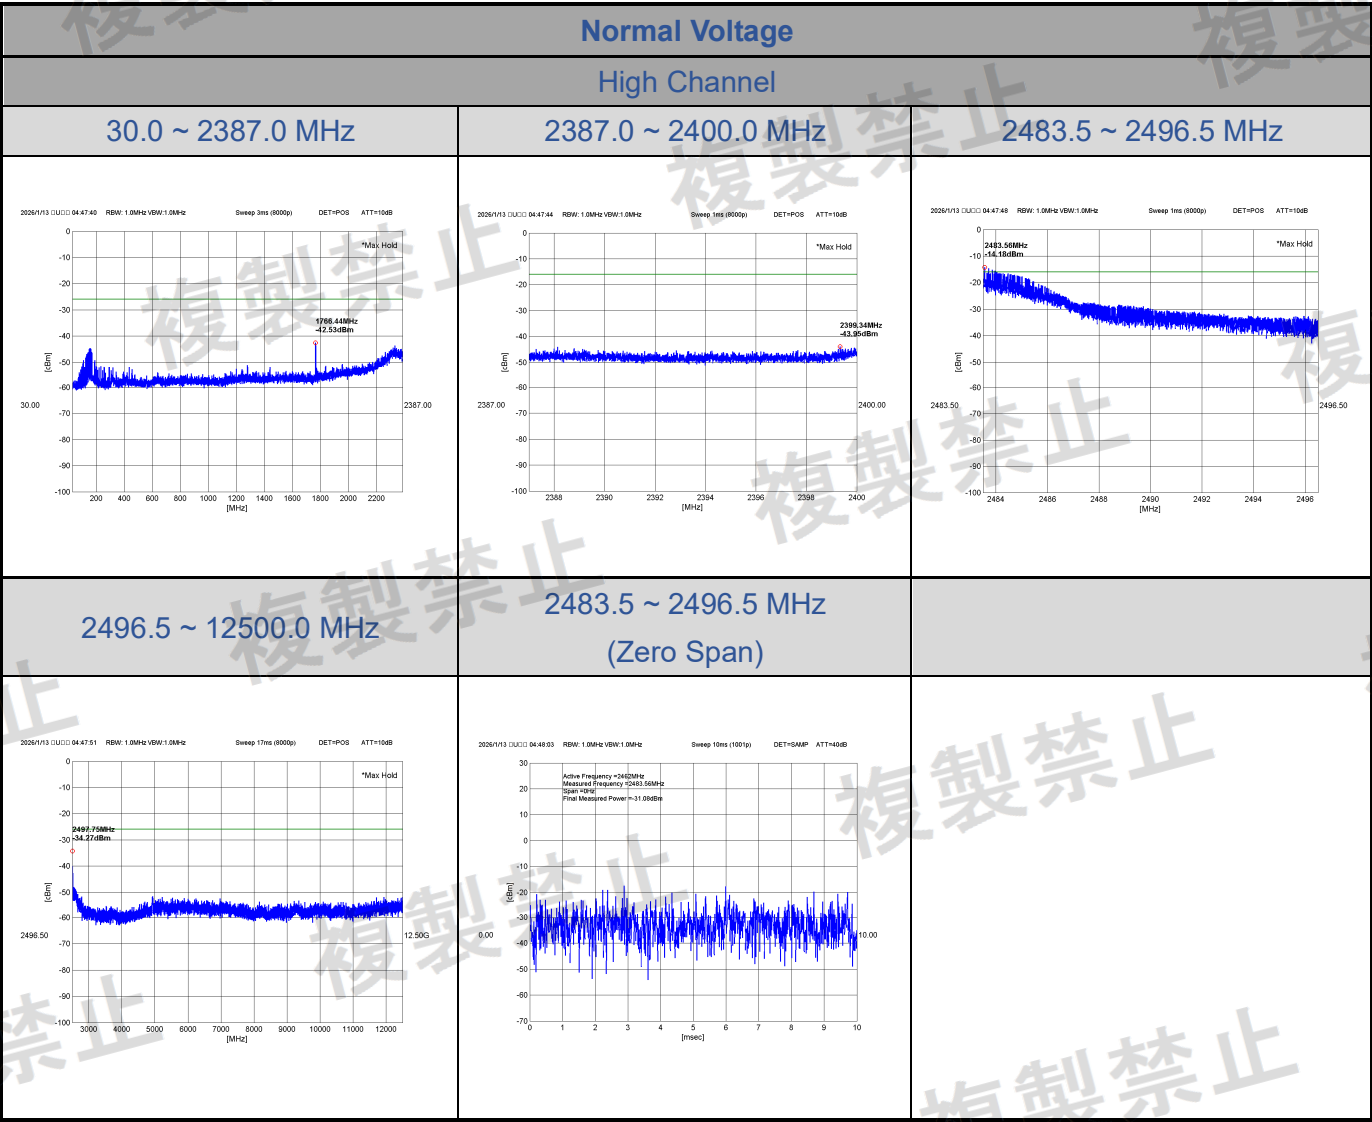

WiFi 2.4G Test Data


CN26VTXQ 001

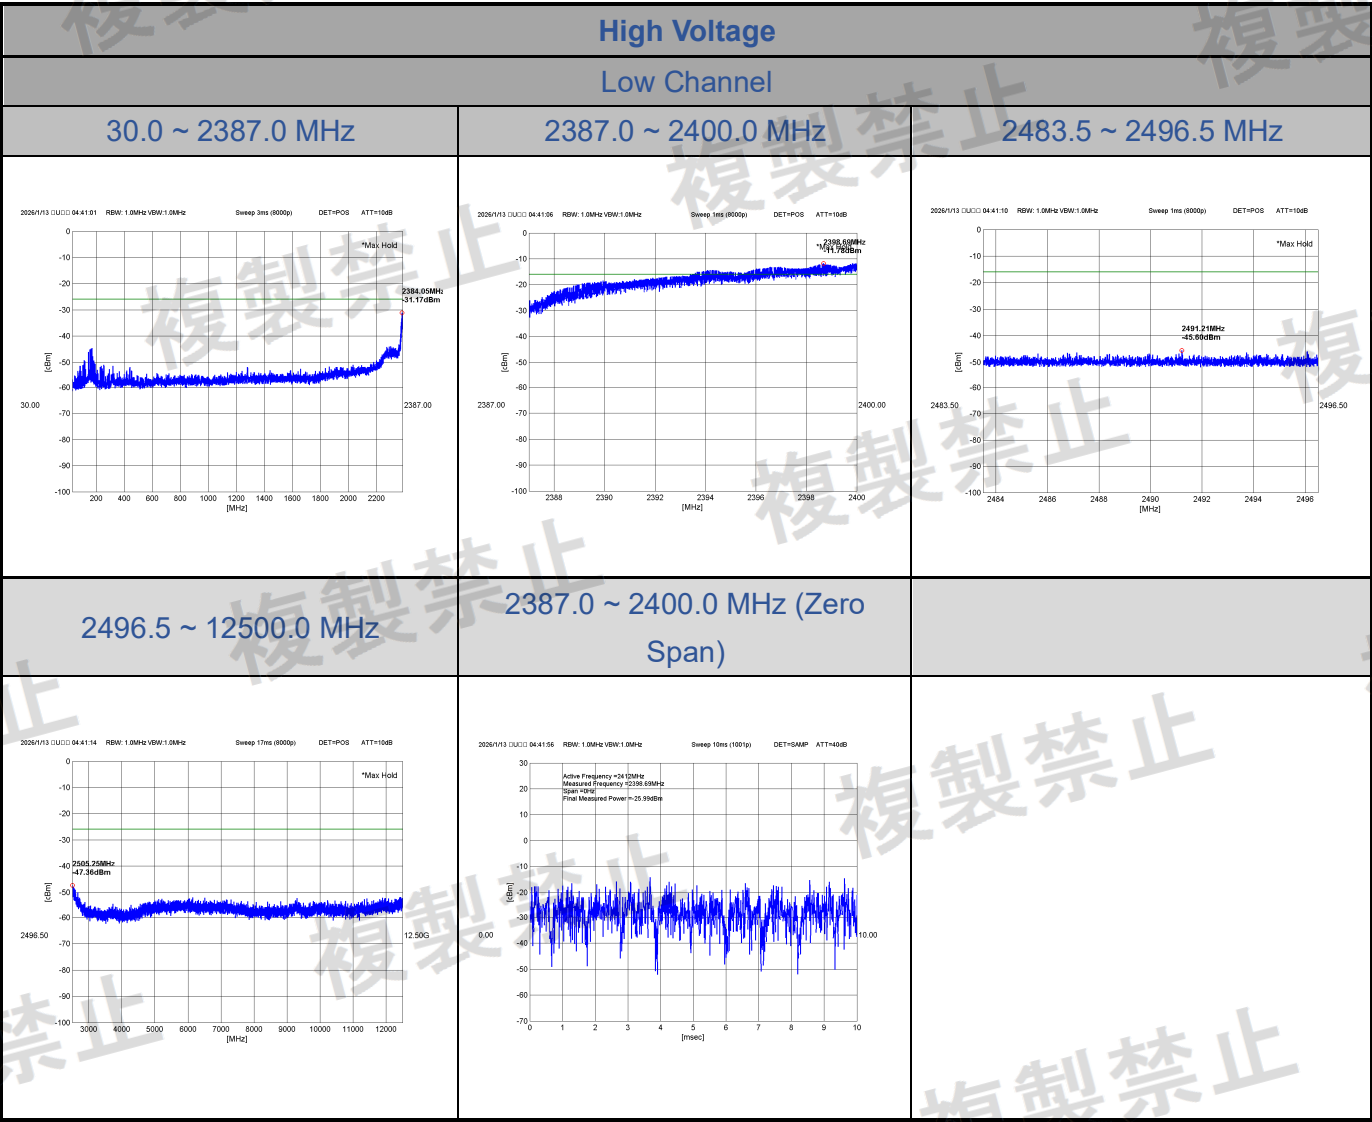

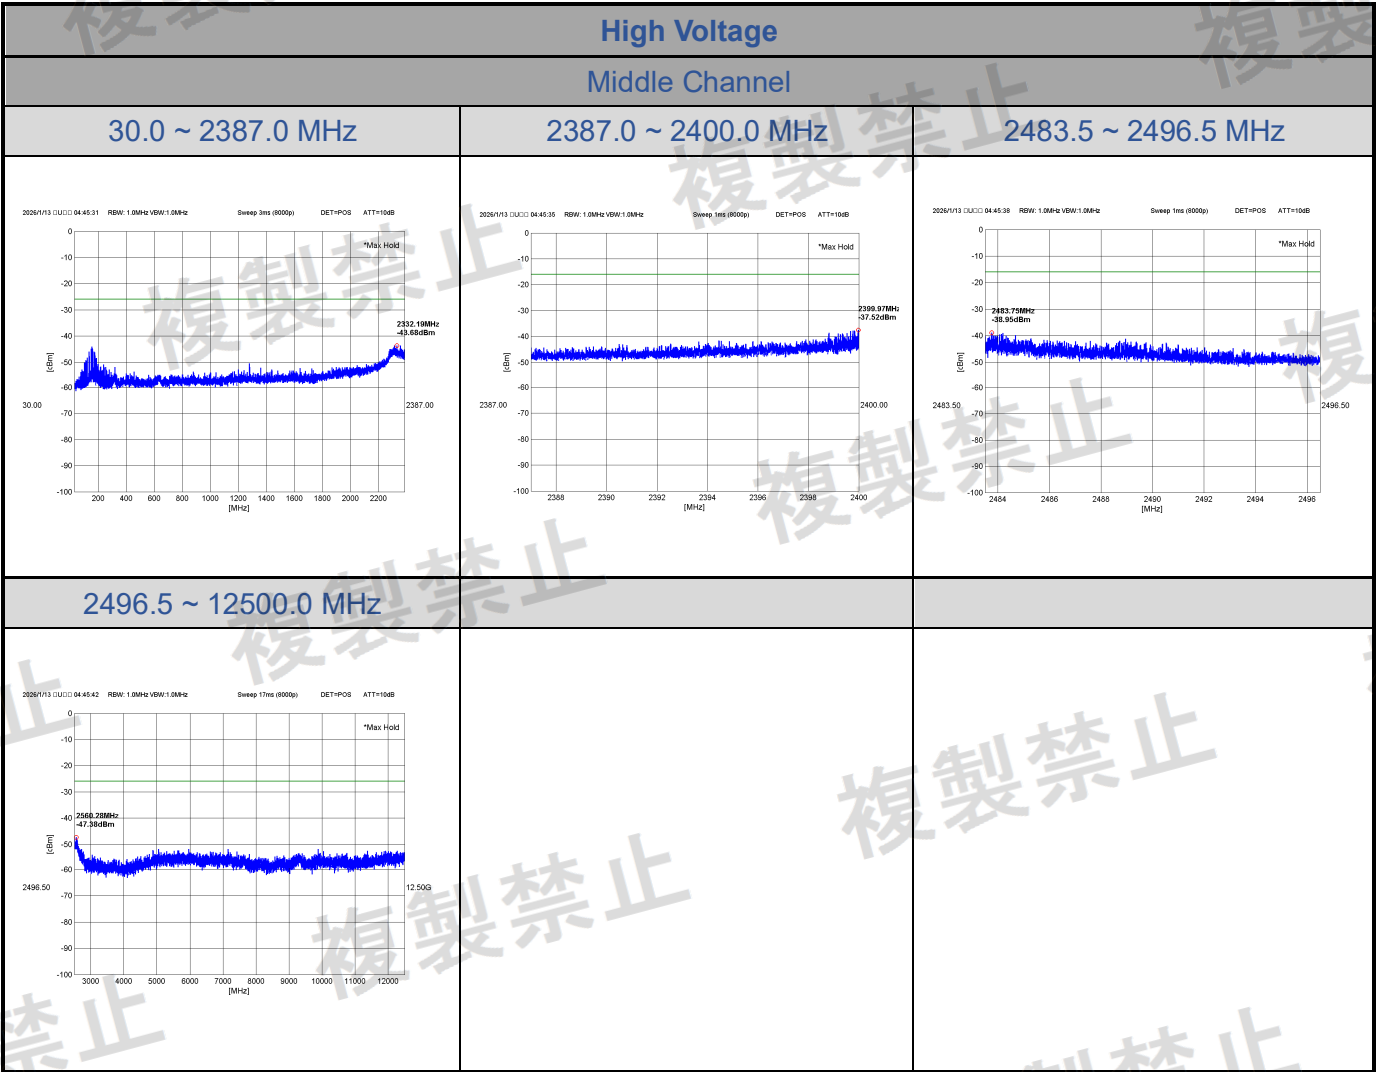


WiFi 2.4G Test Data


CN26VTXQ 001

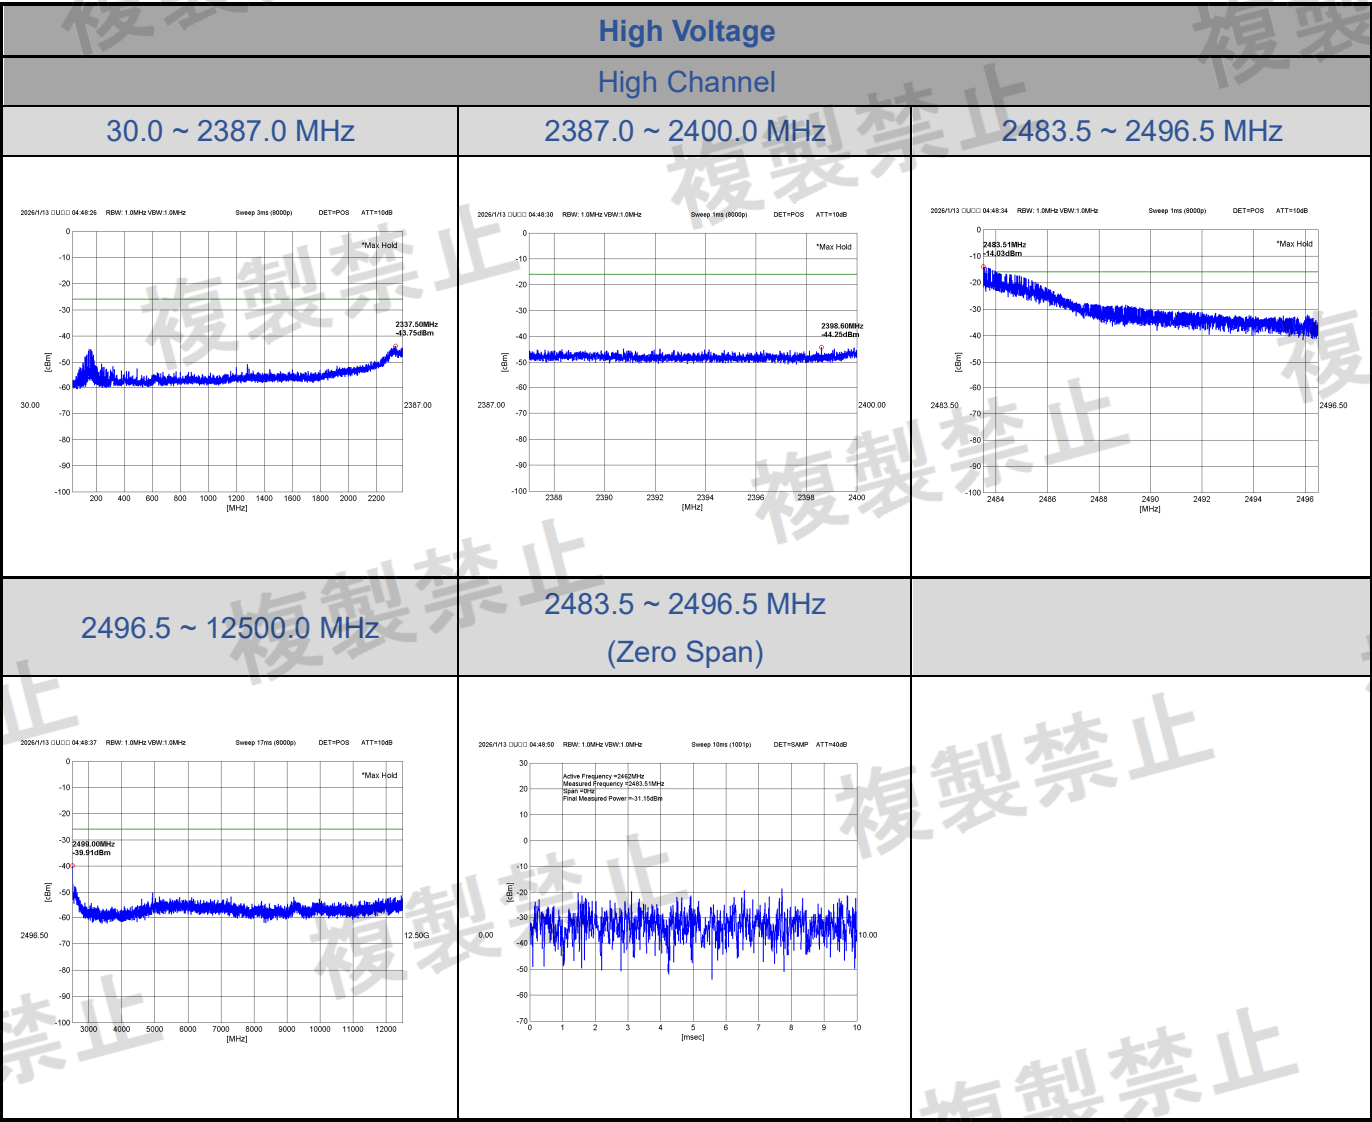

WiFi 2.4G Test Data


CN26VTXQ 001

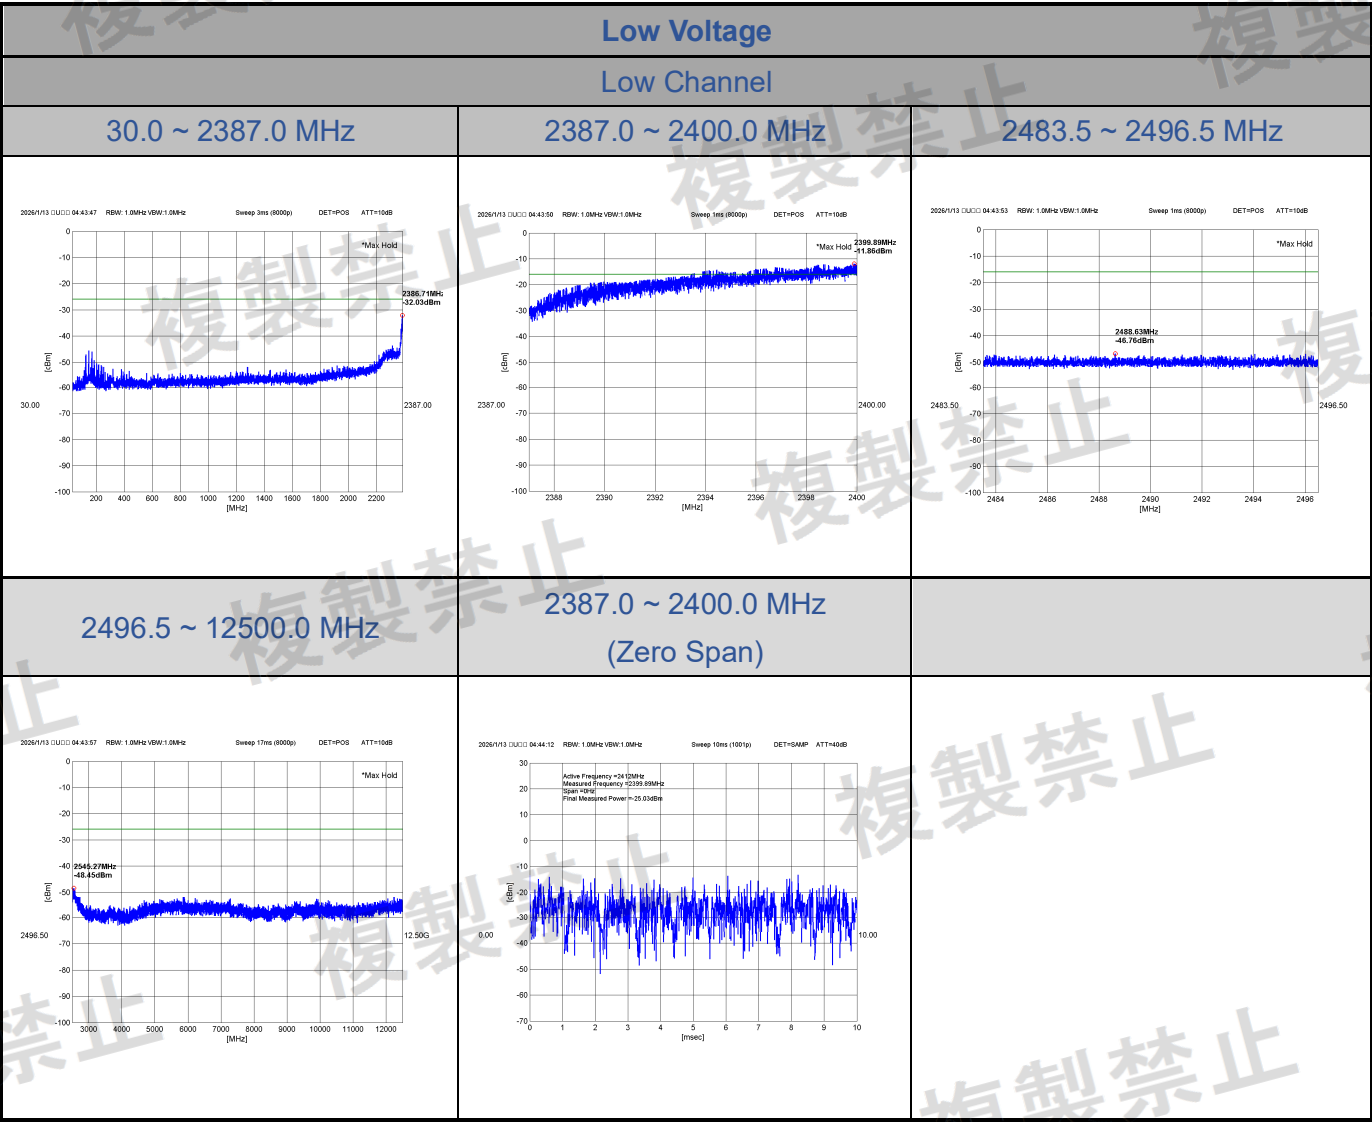

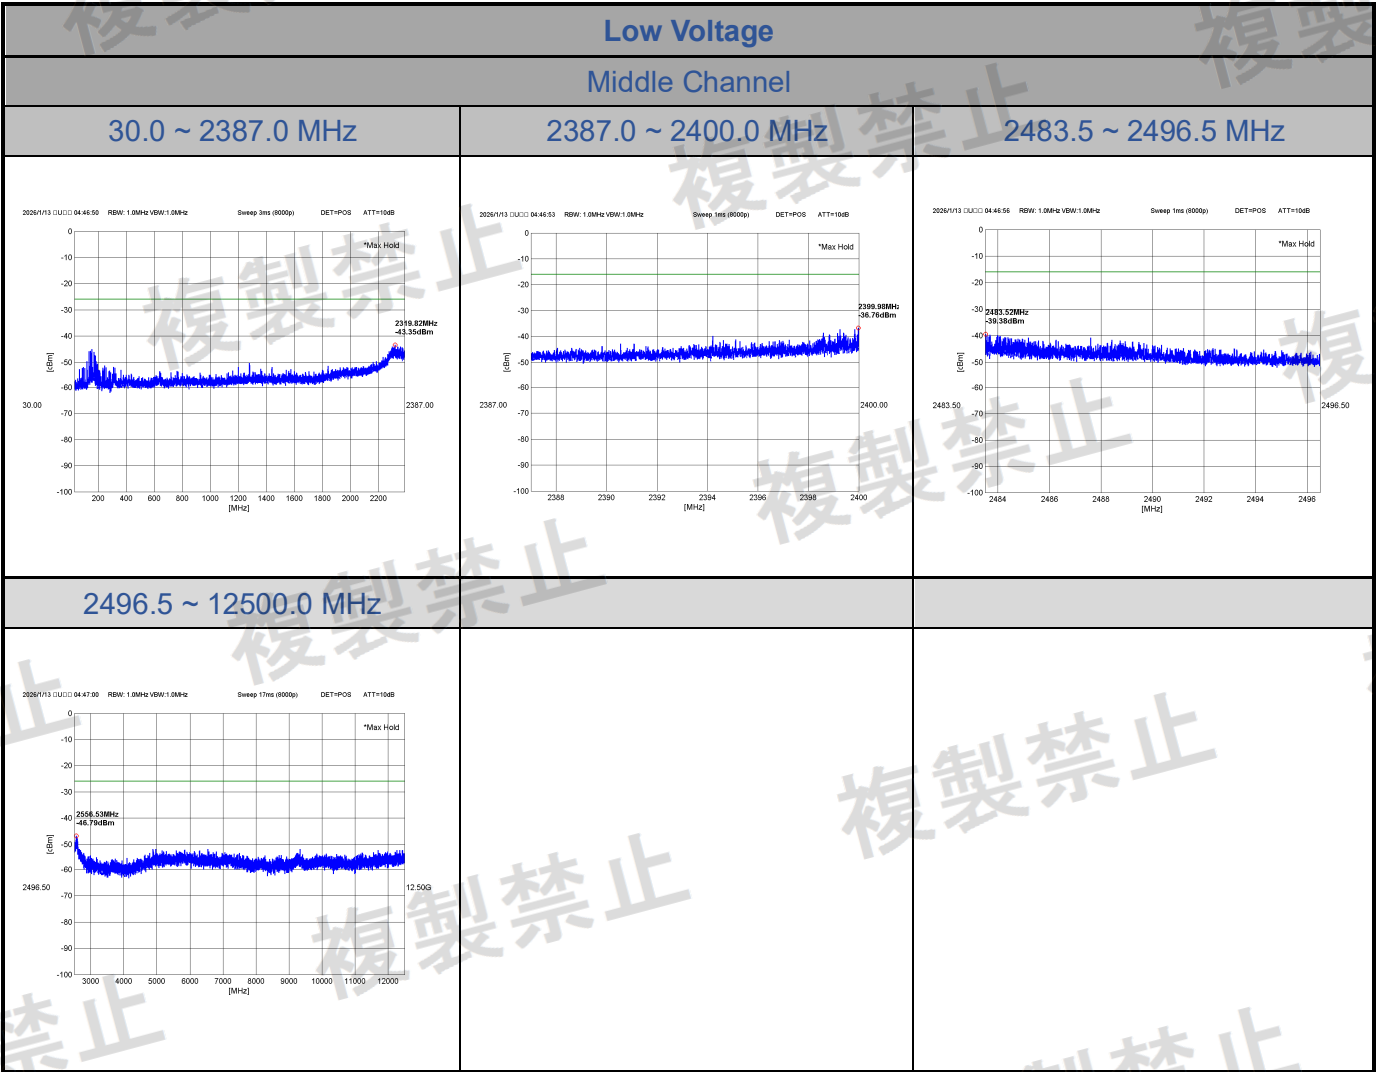

WiFi 2.4G Test Data

CN26VTXQ 001

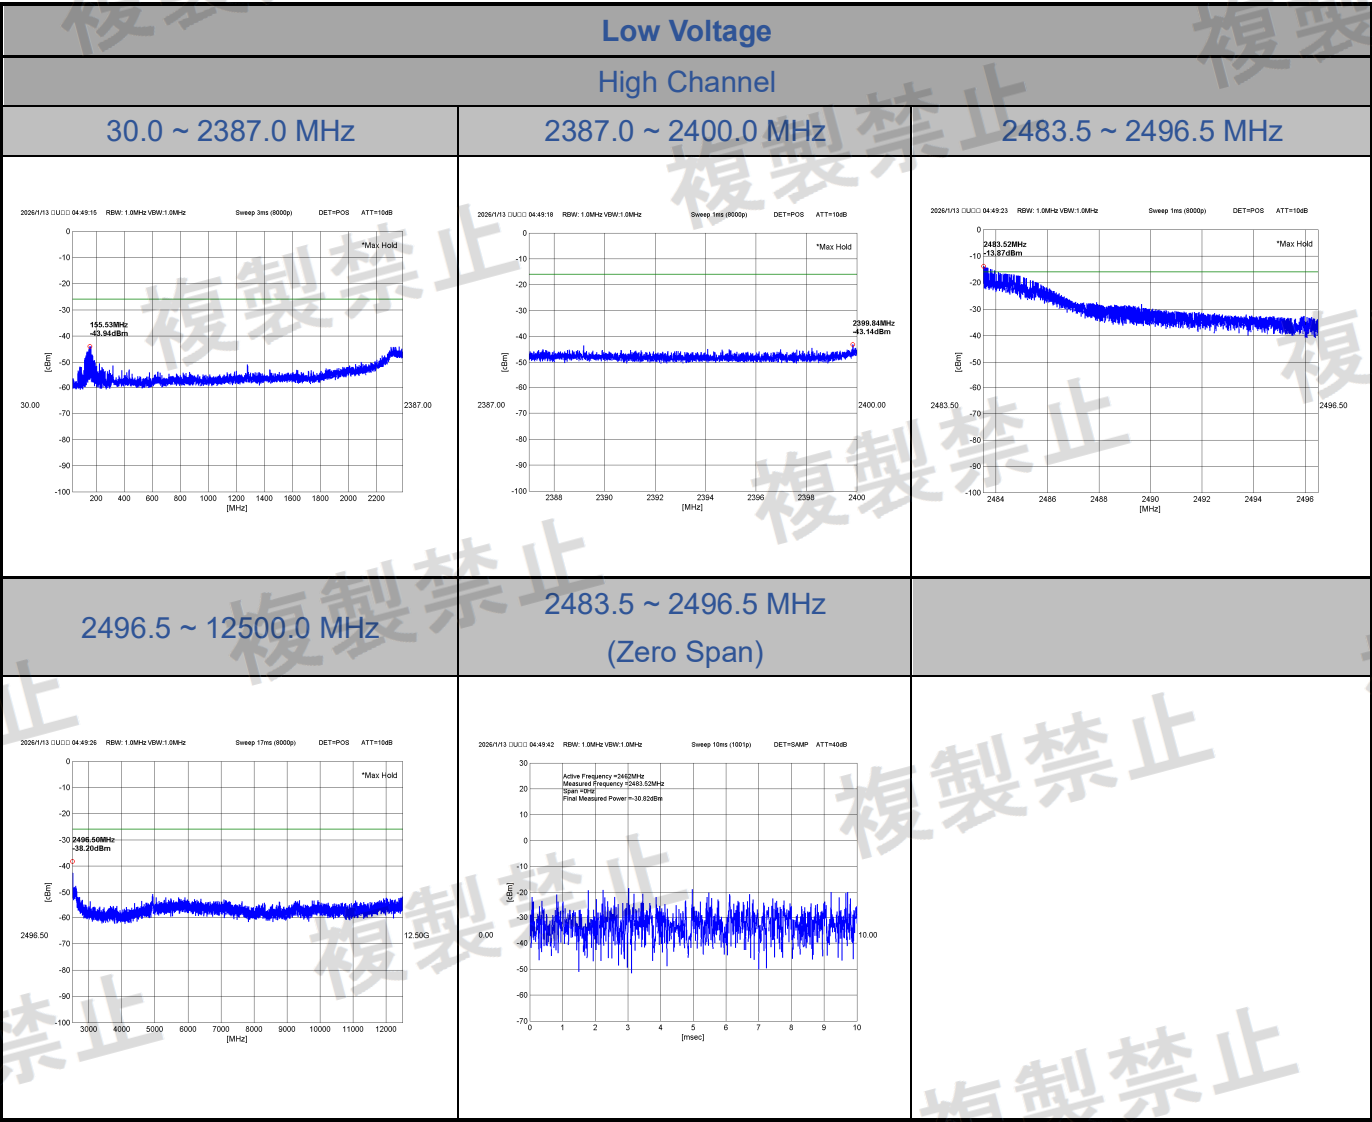



WiFi 2.4G Test Data

CN26VTXQ 001

802.11n HT40:2TX


<Chain 0>

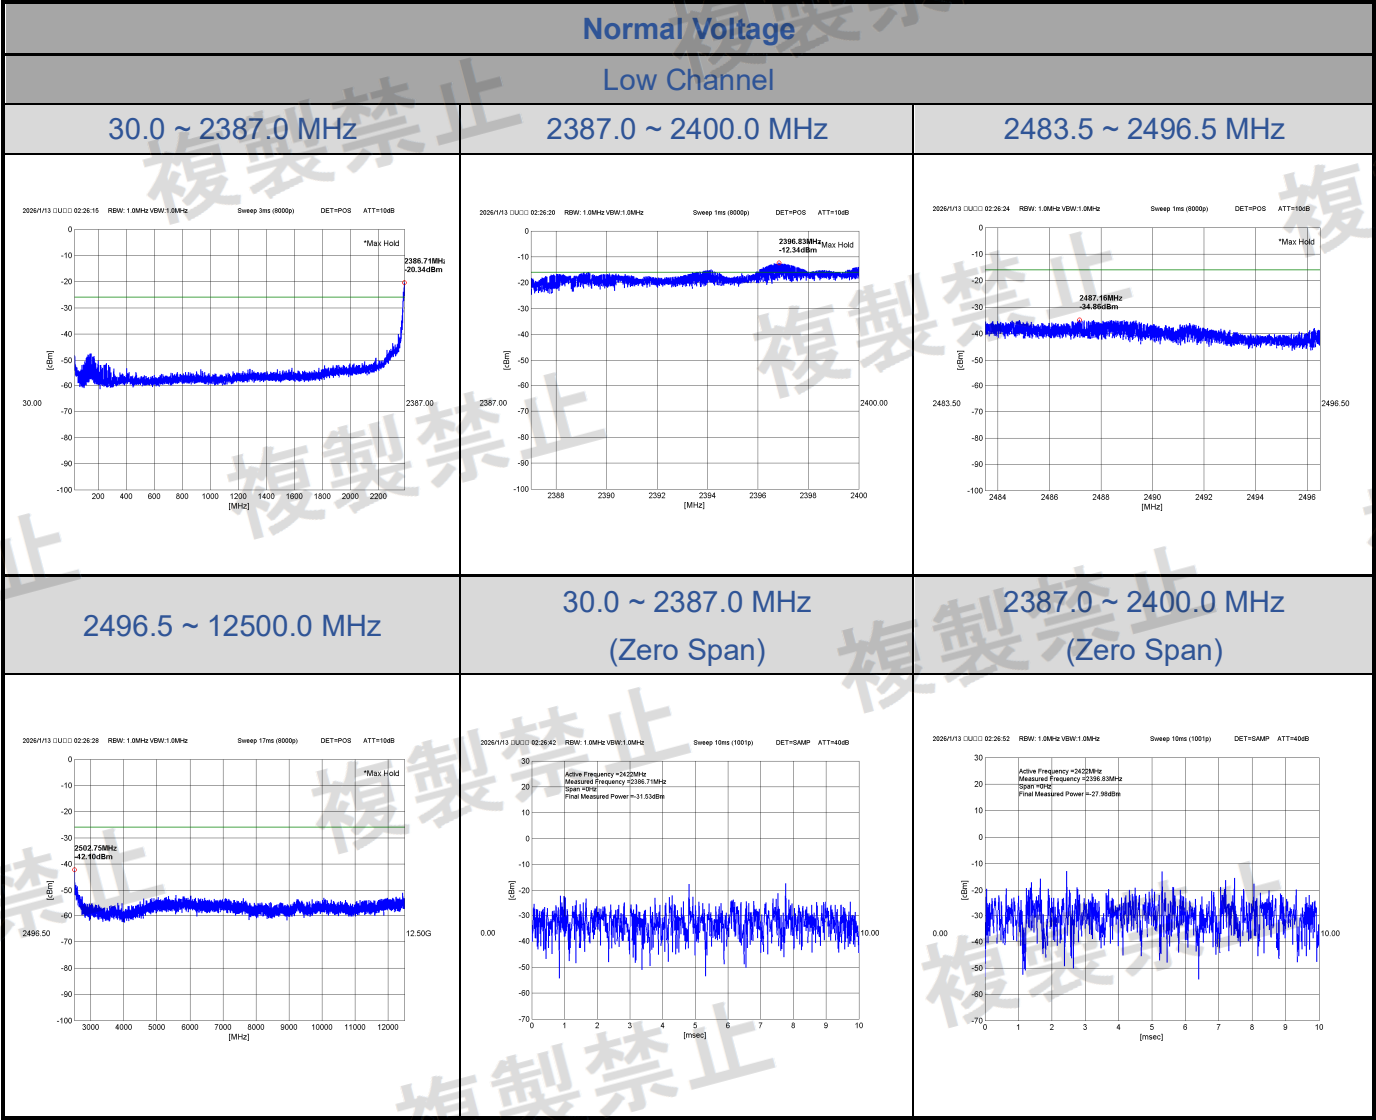

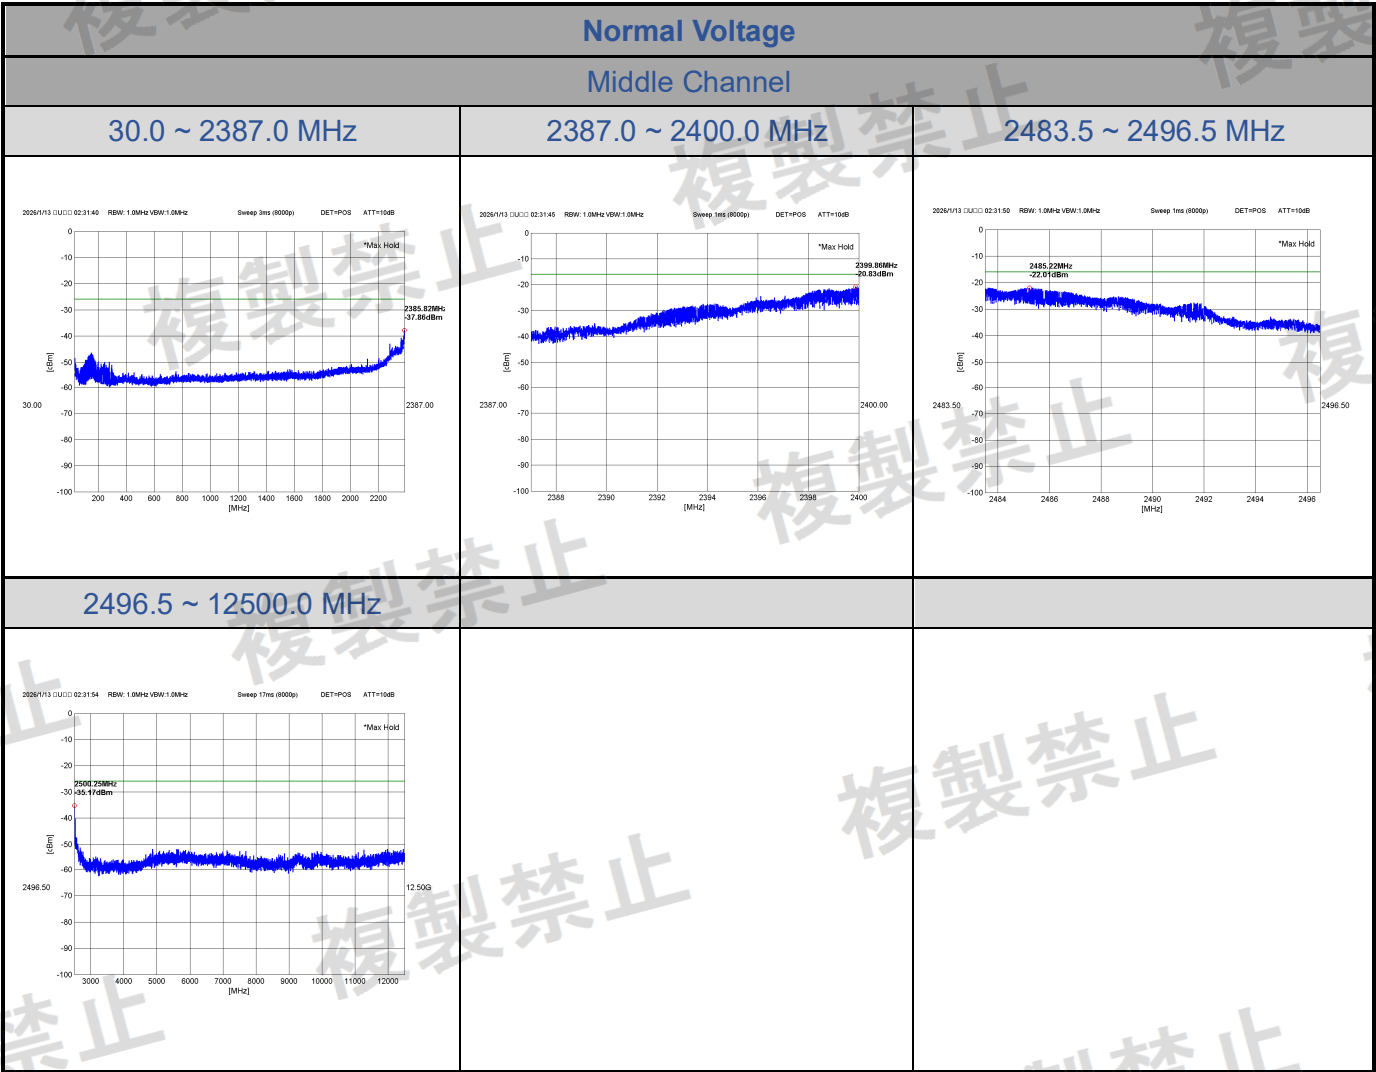


WiFi 2.4G Test Data

CN26VTXQ 001

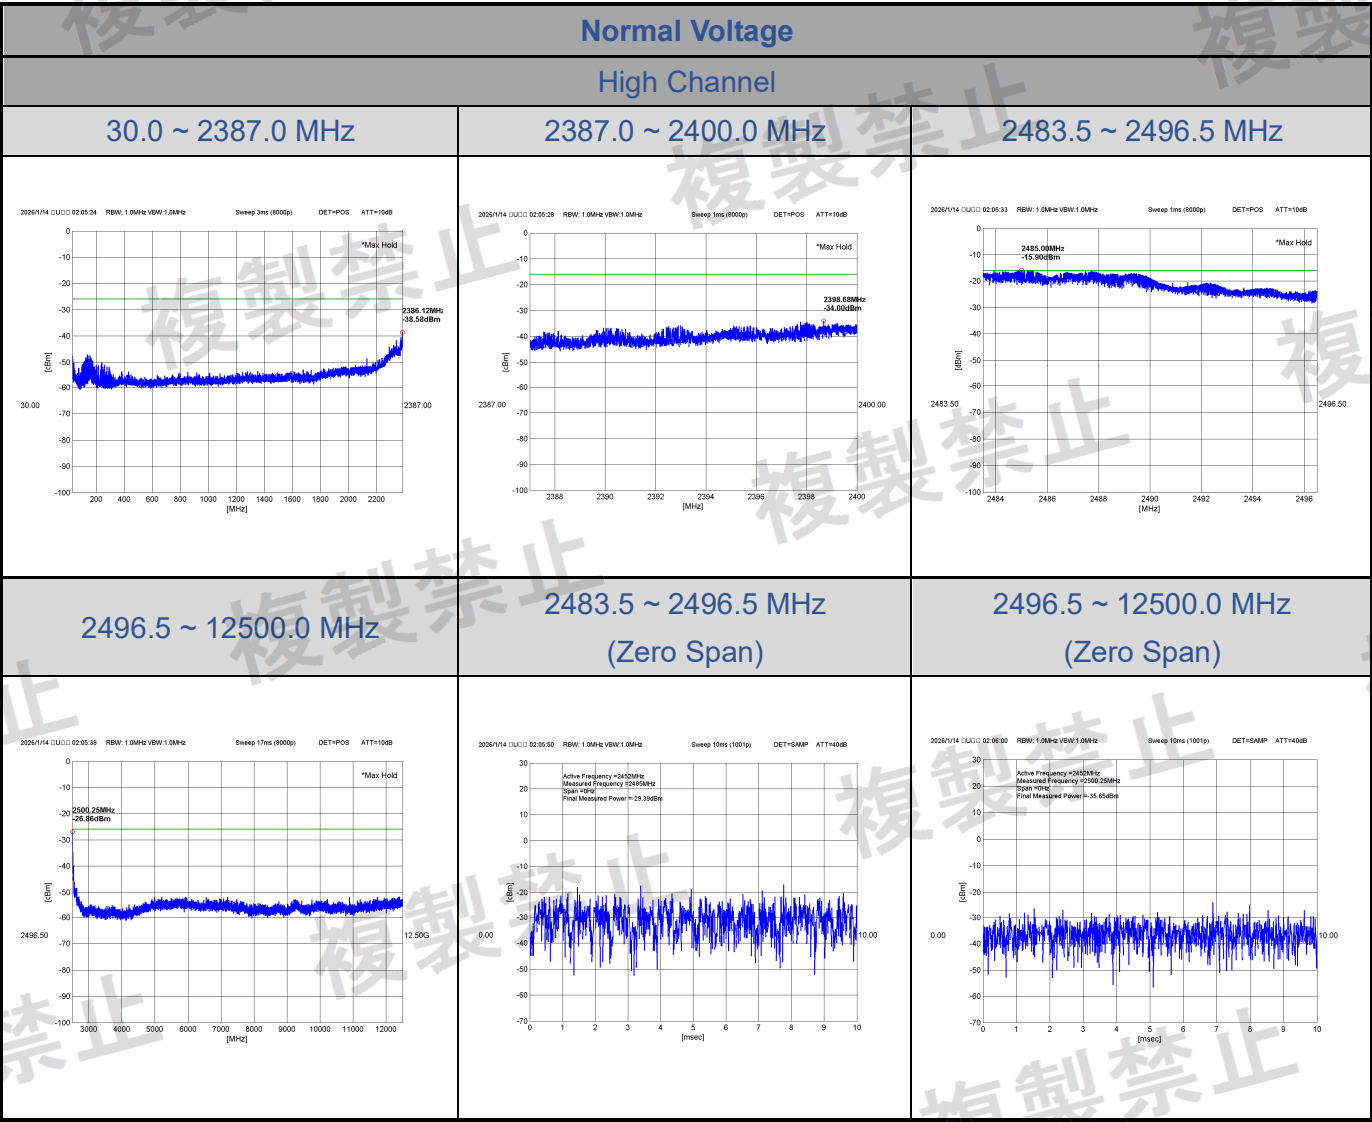


WiFi 2.4G Test Data

CN26VTXQ 001

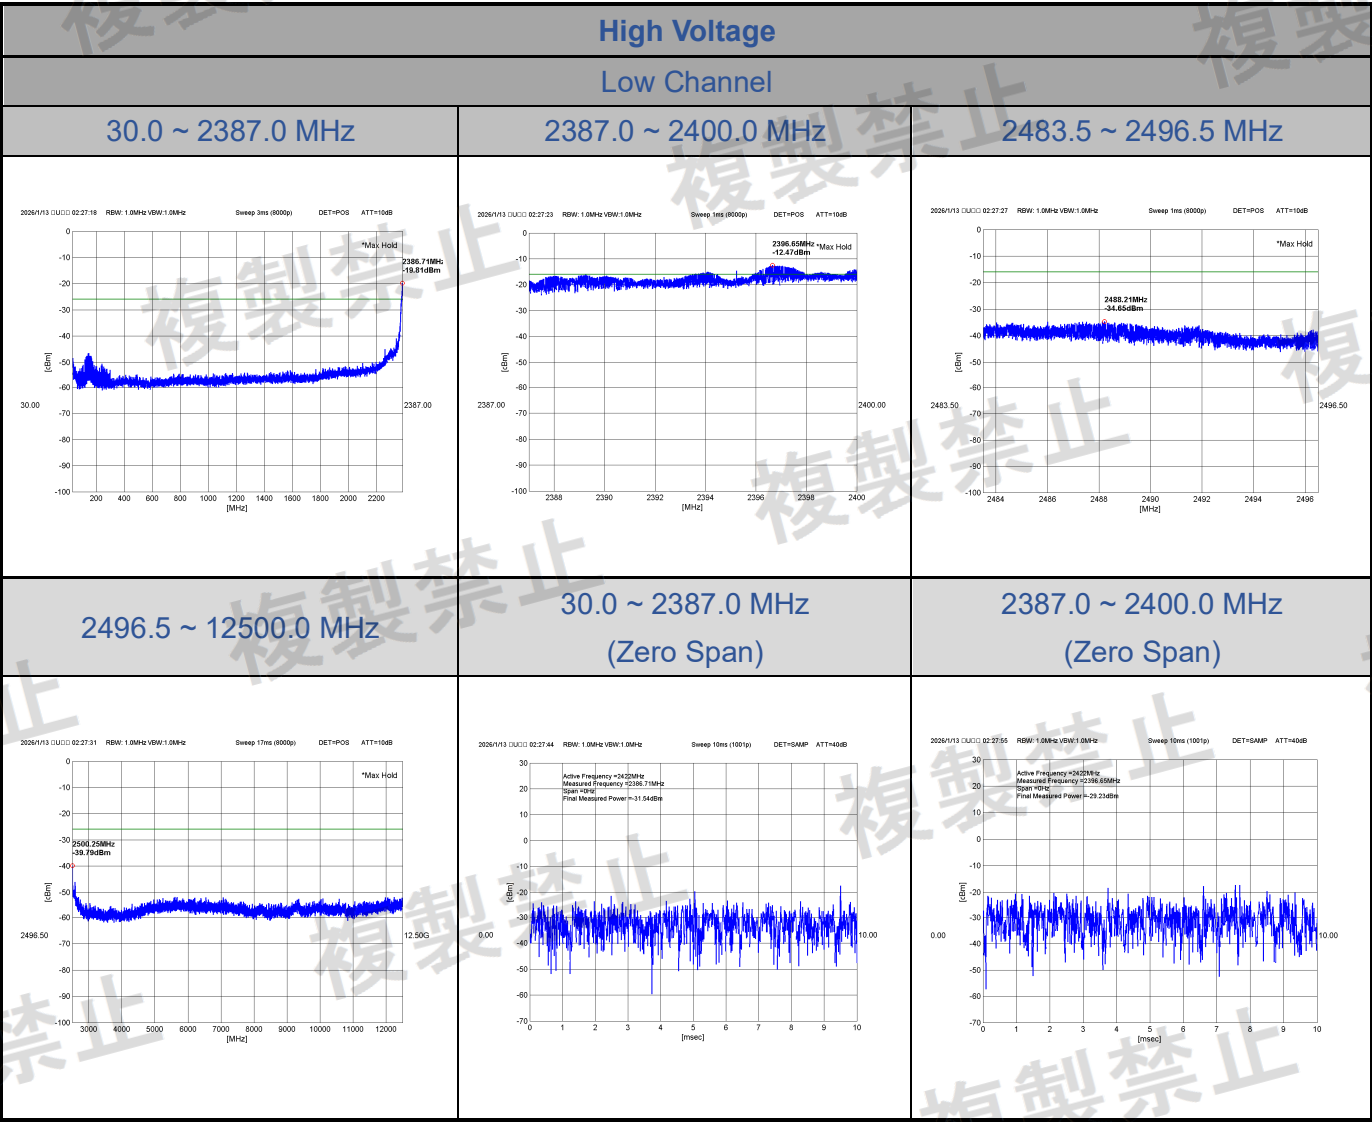


WiFi 2.4G Test Data

CN26VTXQ 001

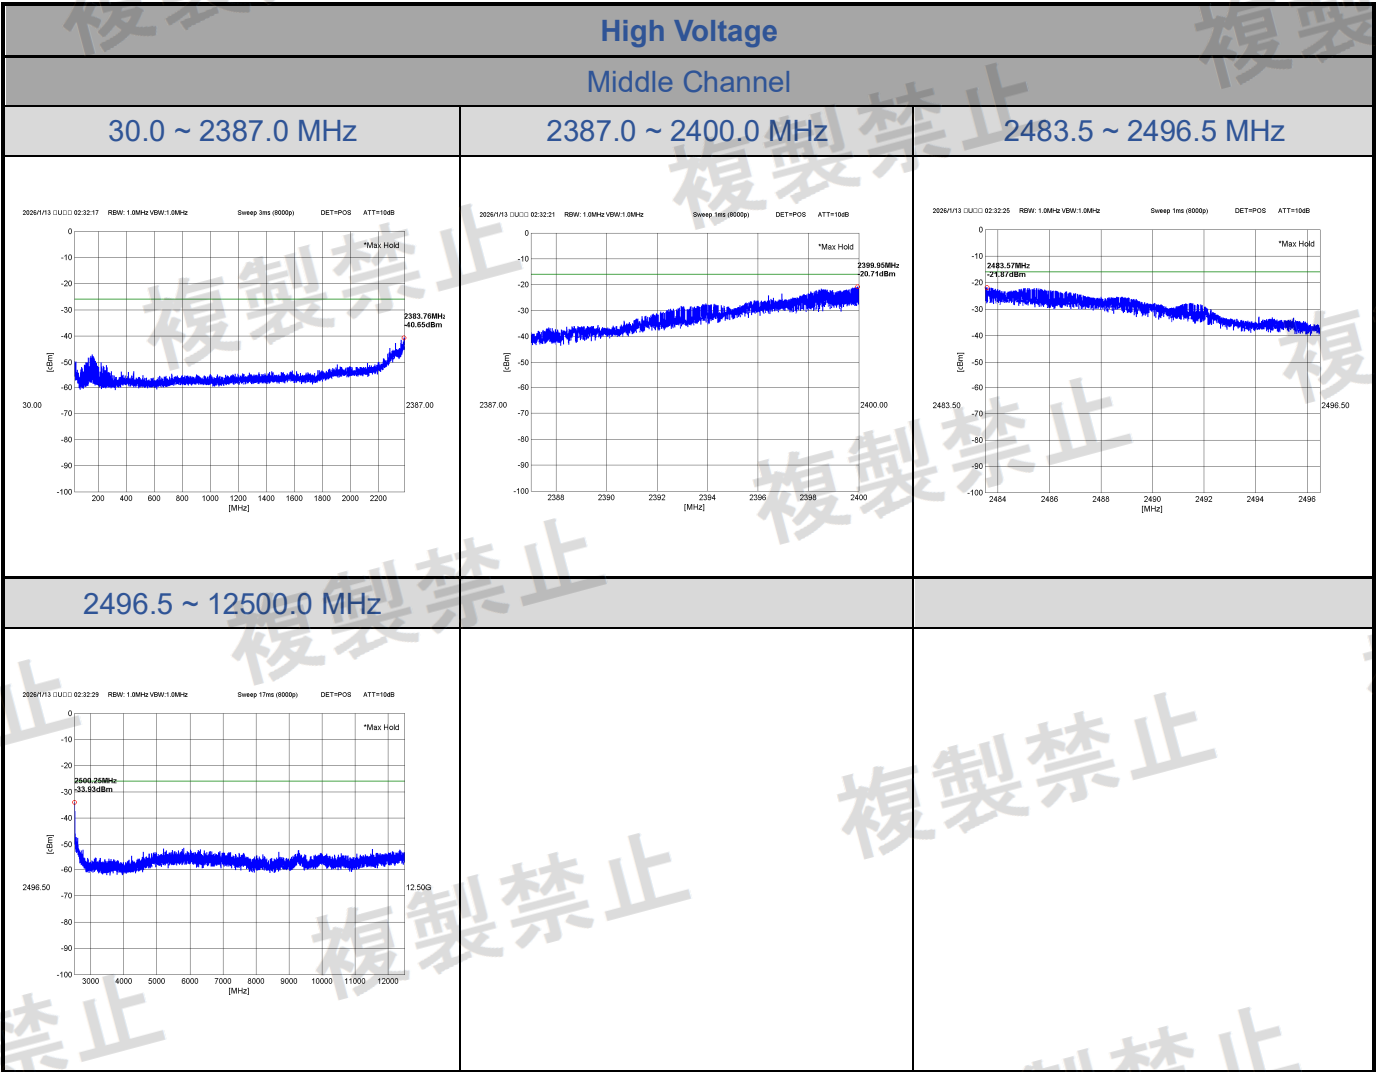


WiFi 2.4G Test Data


CN26VTXQ 001

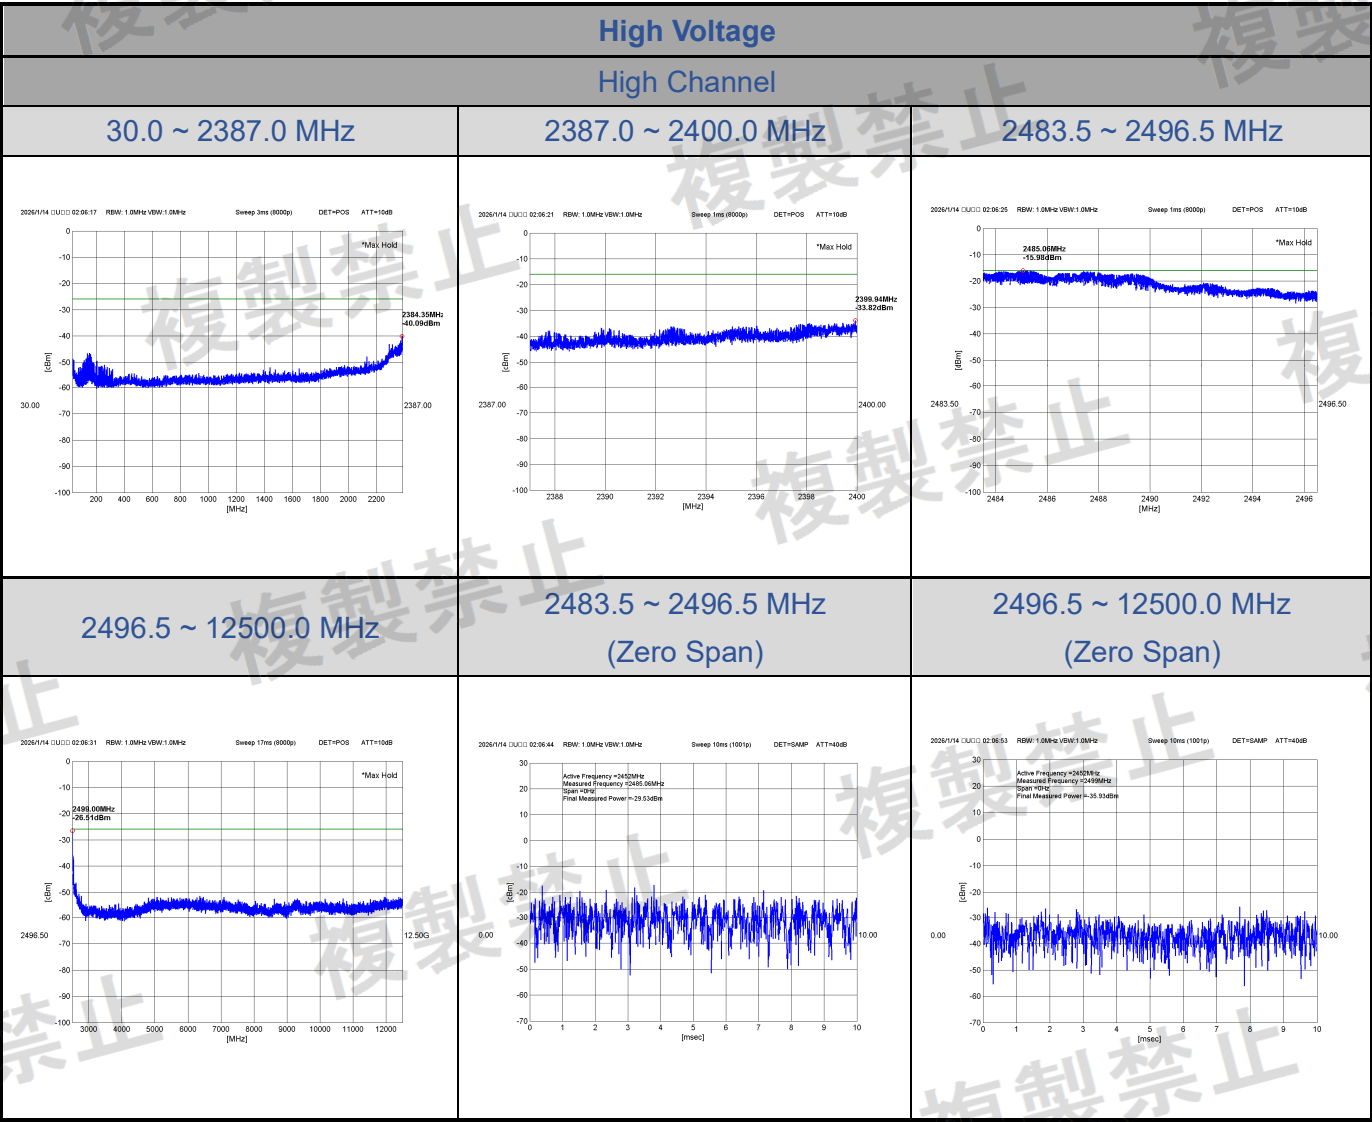

WiFi 2.4G Test Data


CN26VTXQ 001

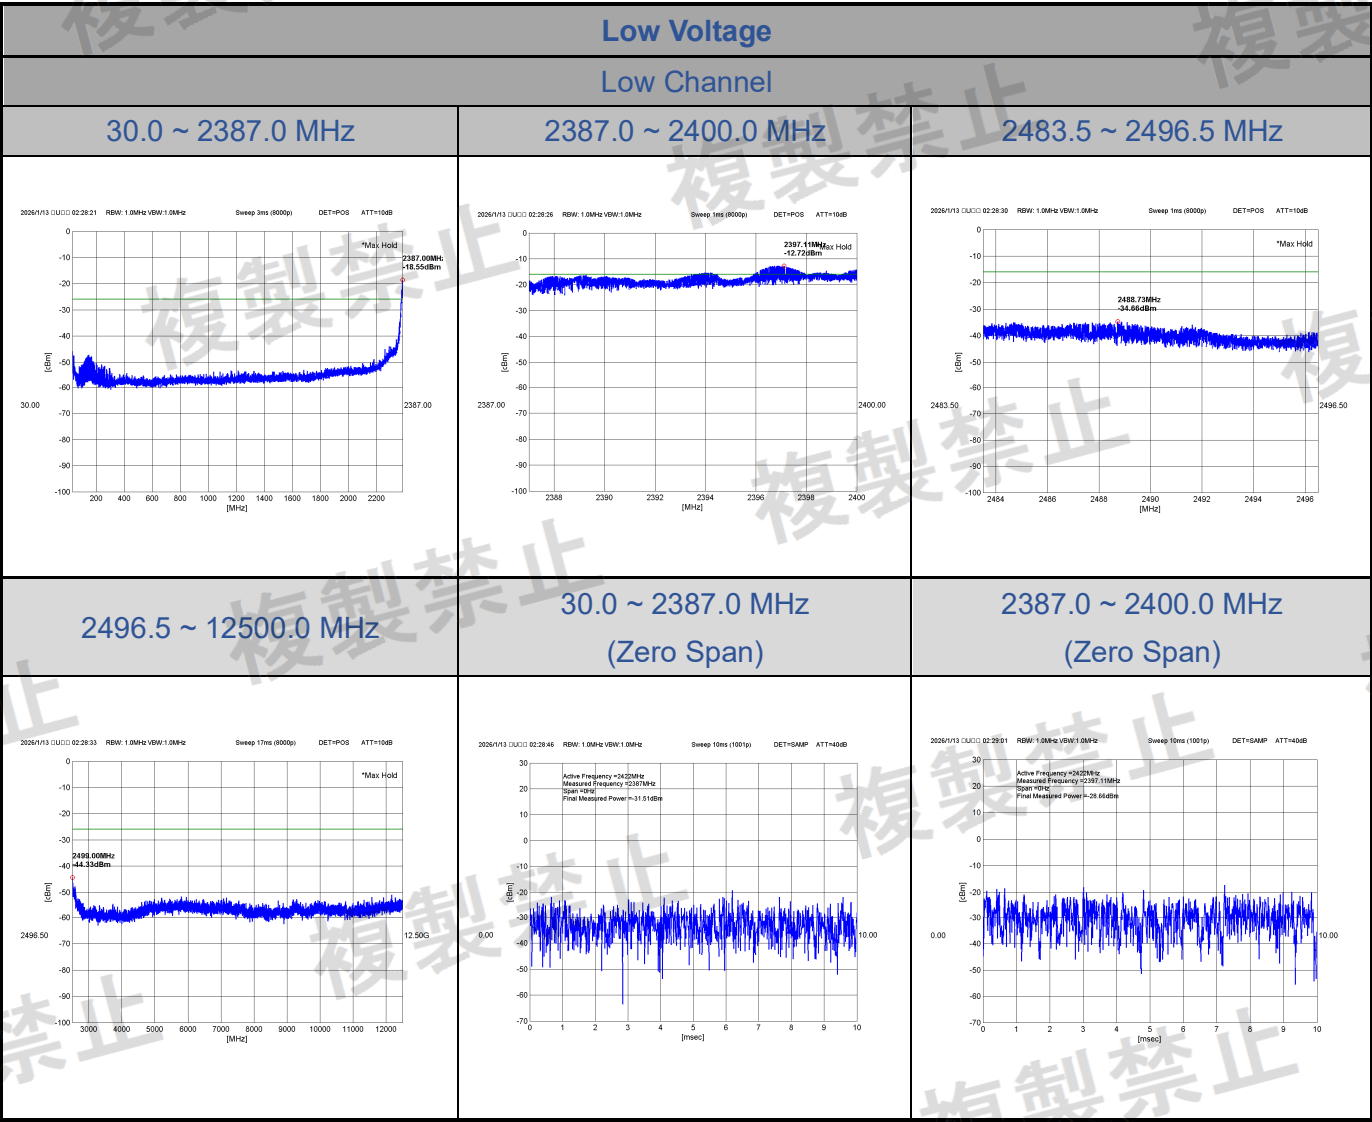

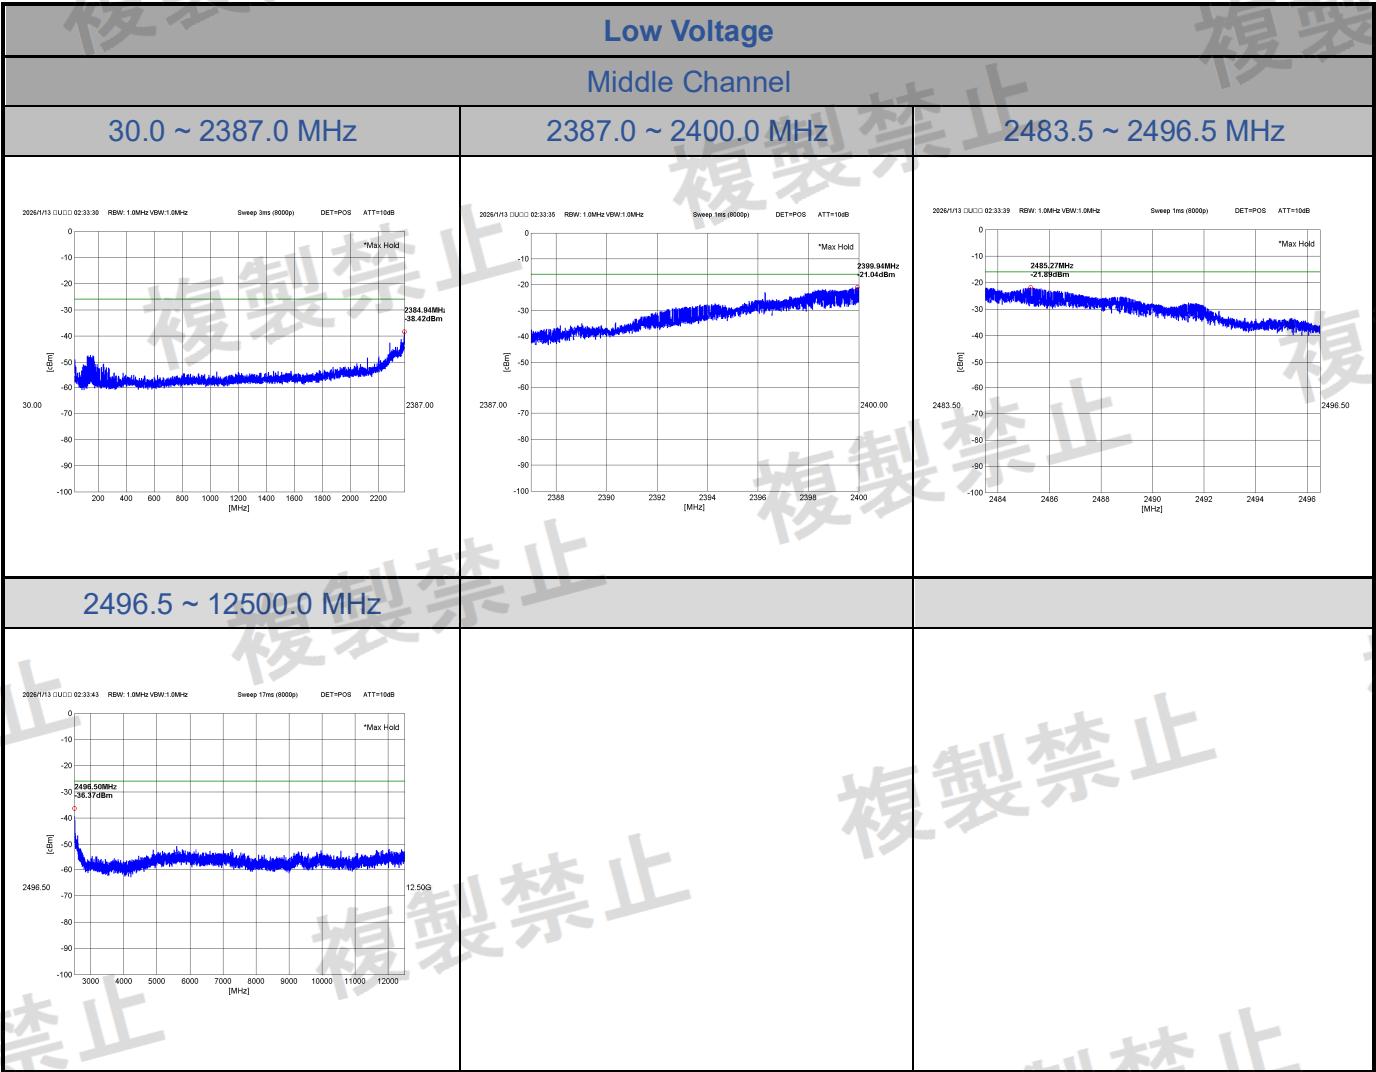

WiFi 2.4G Test Data

CN26VTXQ 001

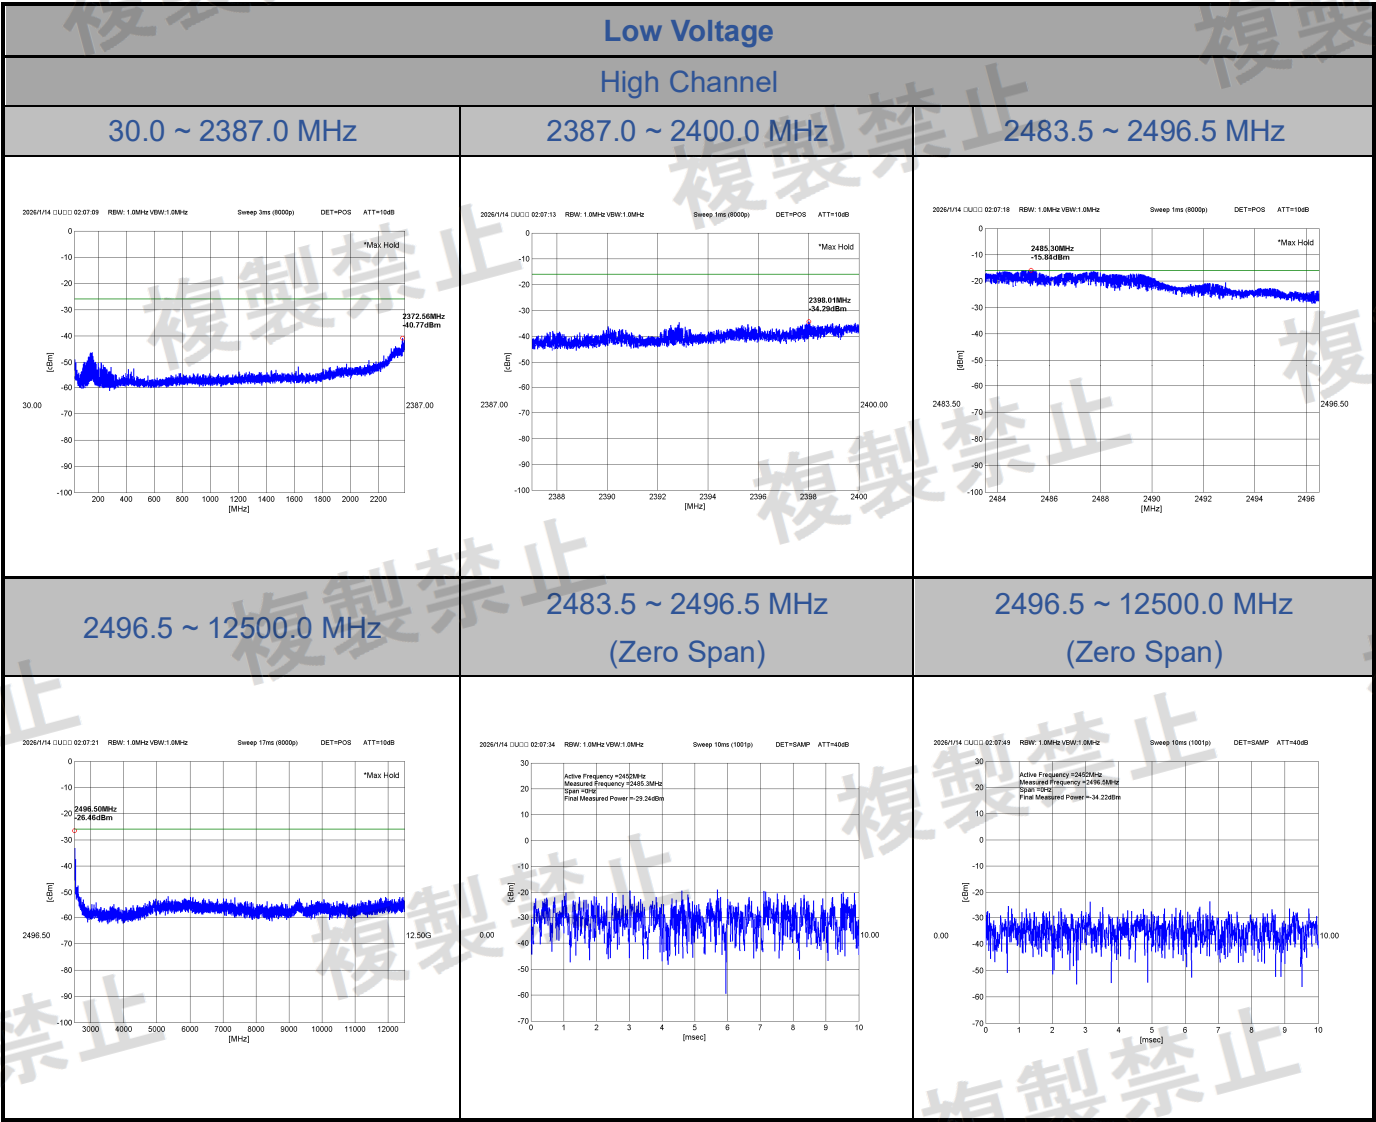


WiFi 2.4G Test Data

CN26VTXQ 001


802.11n HT40:2TX

<Chain 1>

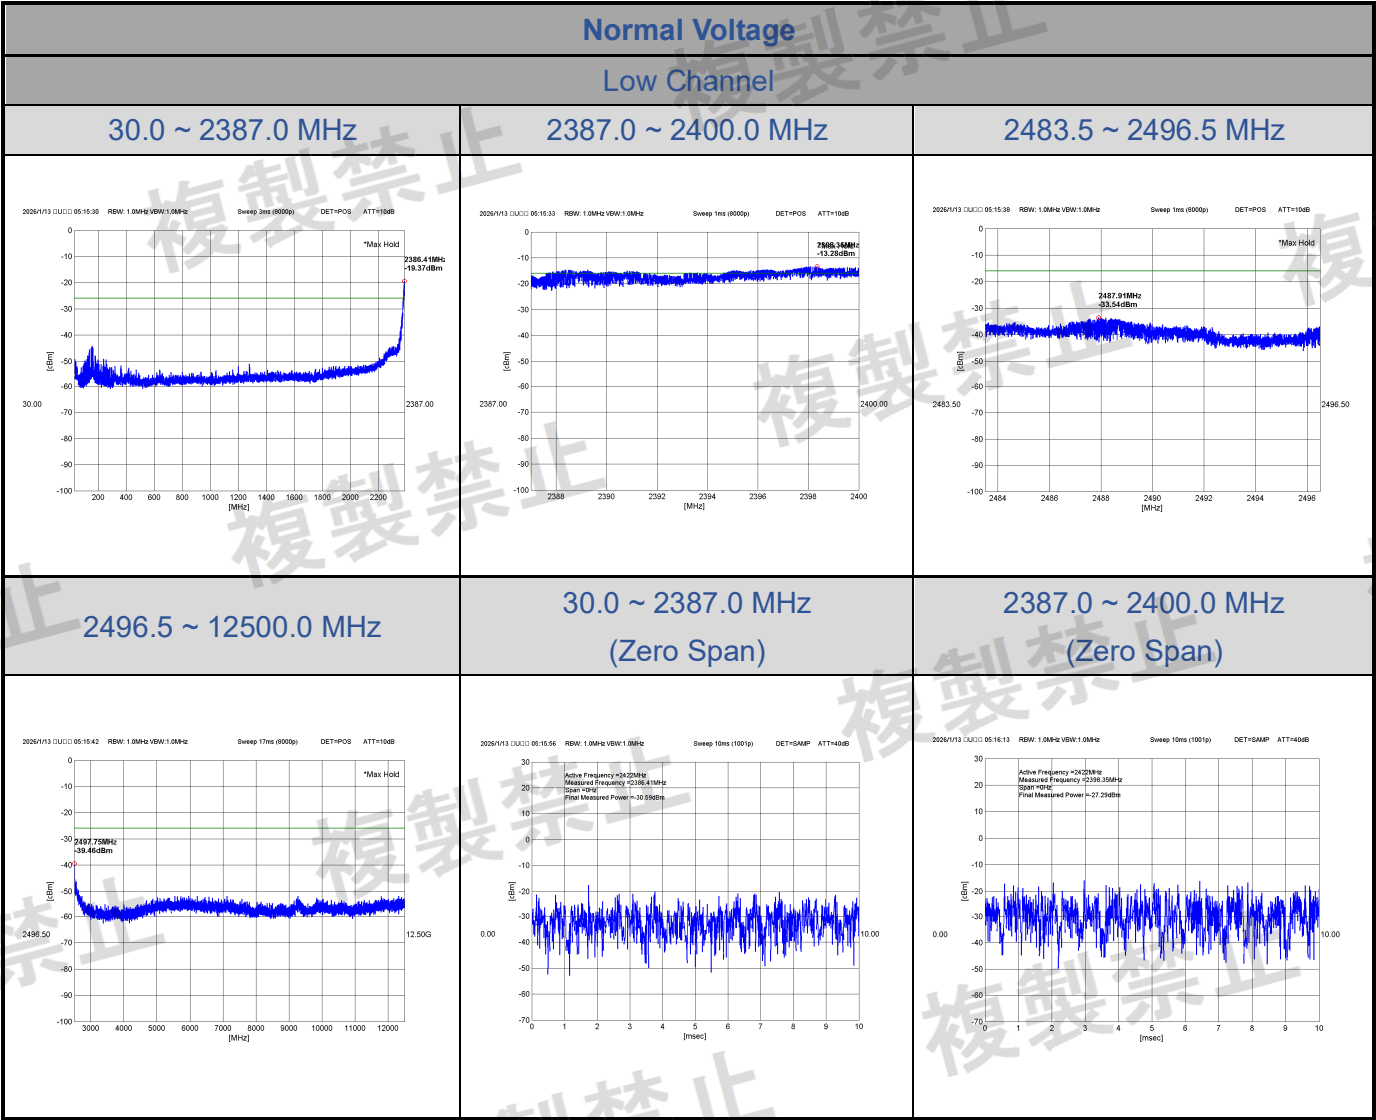


WiFi 2.4G Test Data

CN26VTXQ 001

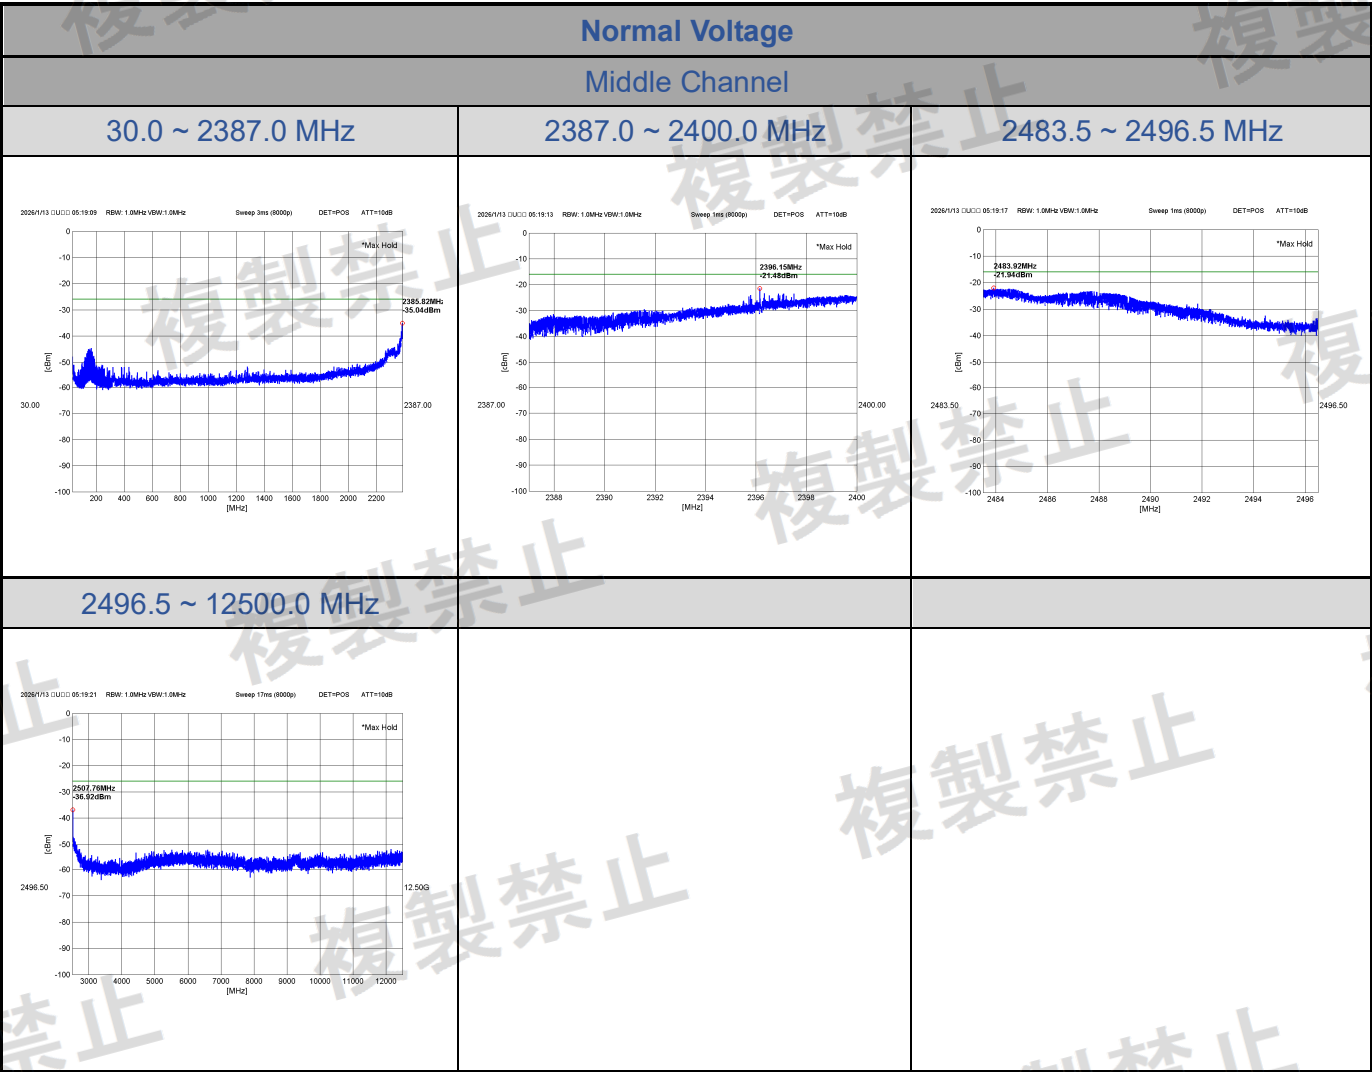


WiFi 2.4G Test Data


CN26VTXQ 001

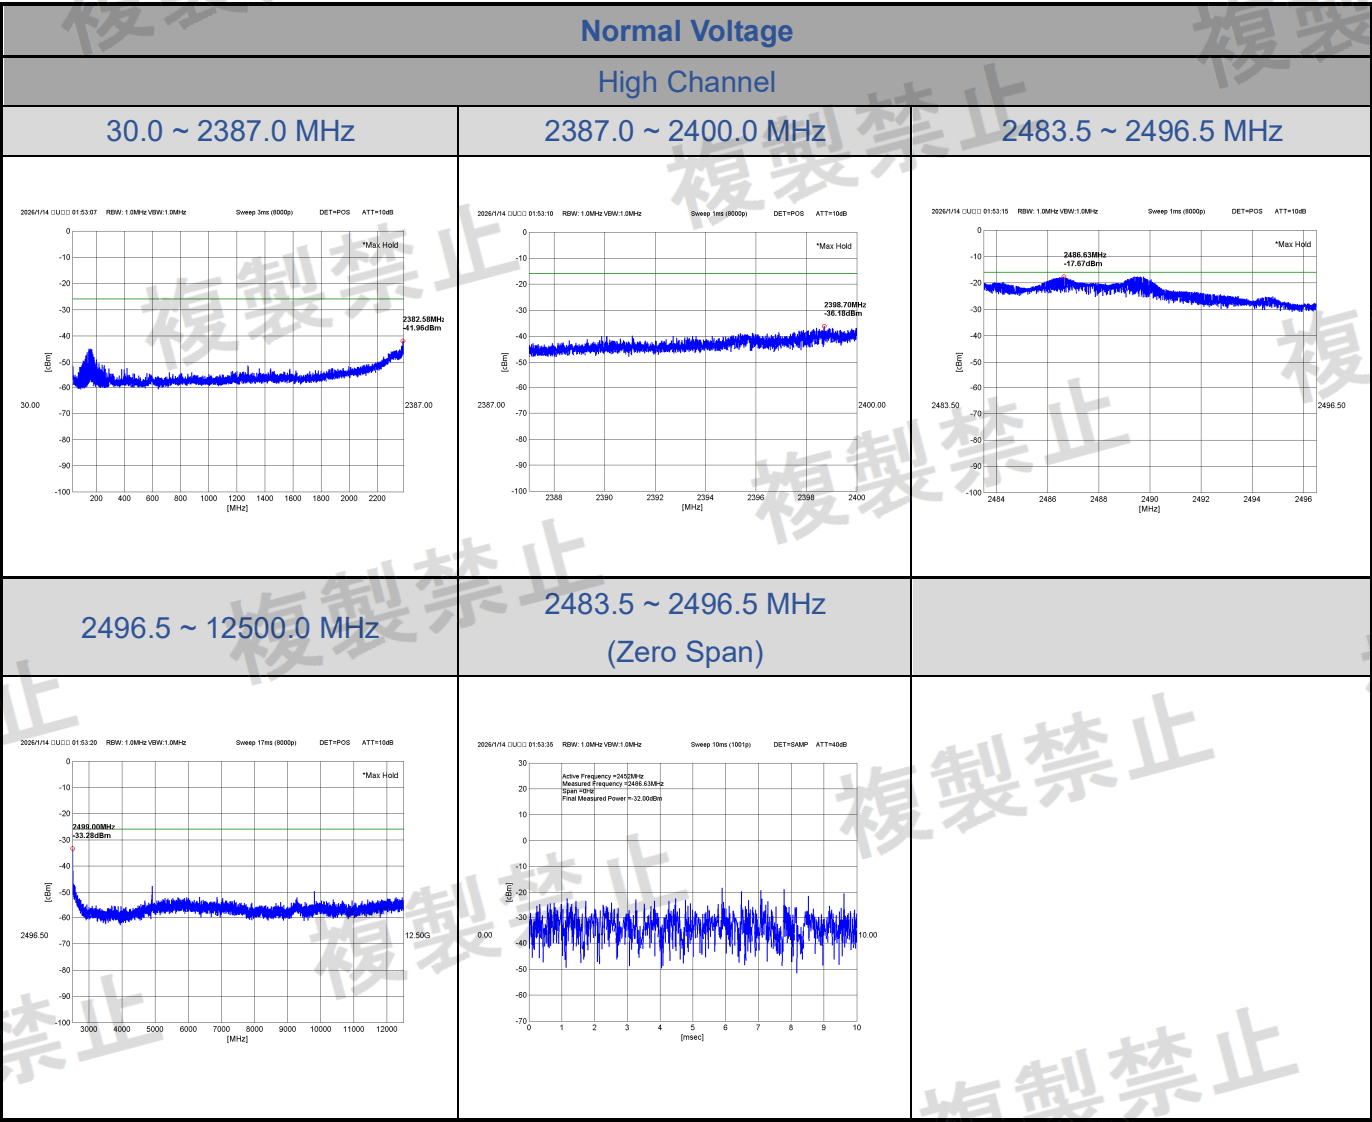

WiFi 2.4G Test Data


CN26VTXQ 001

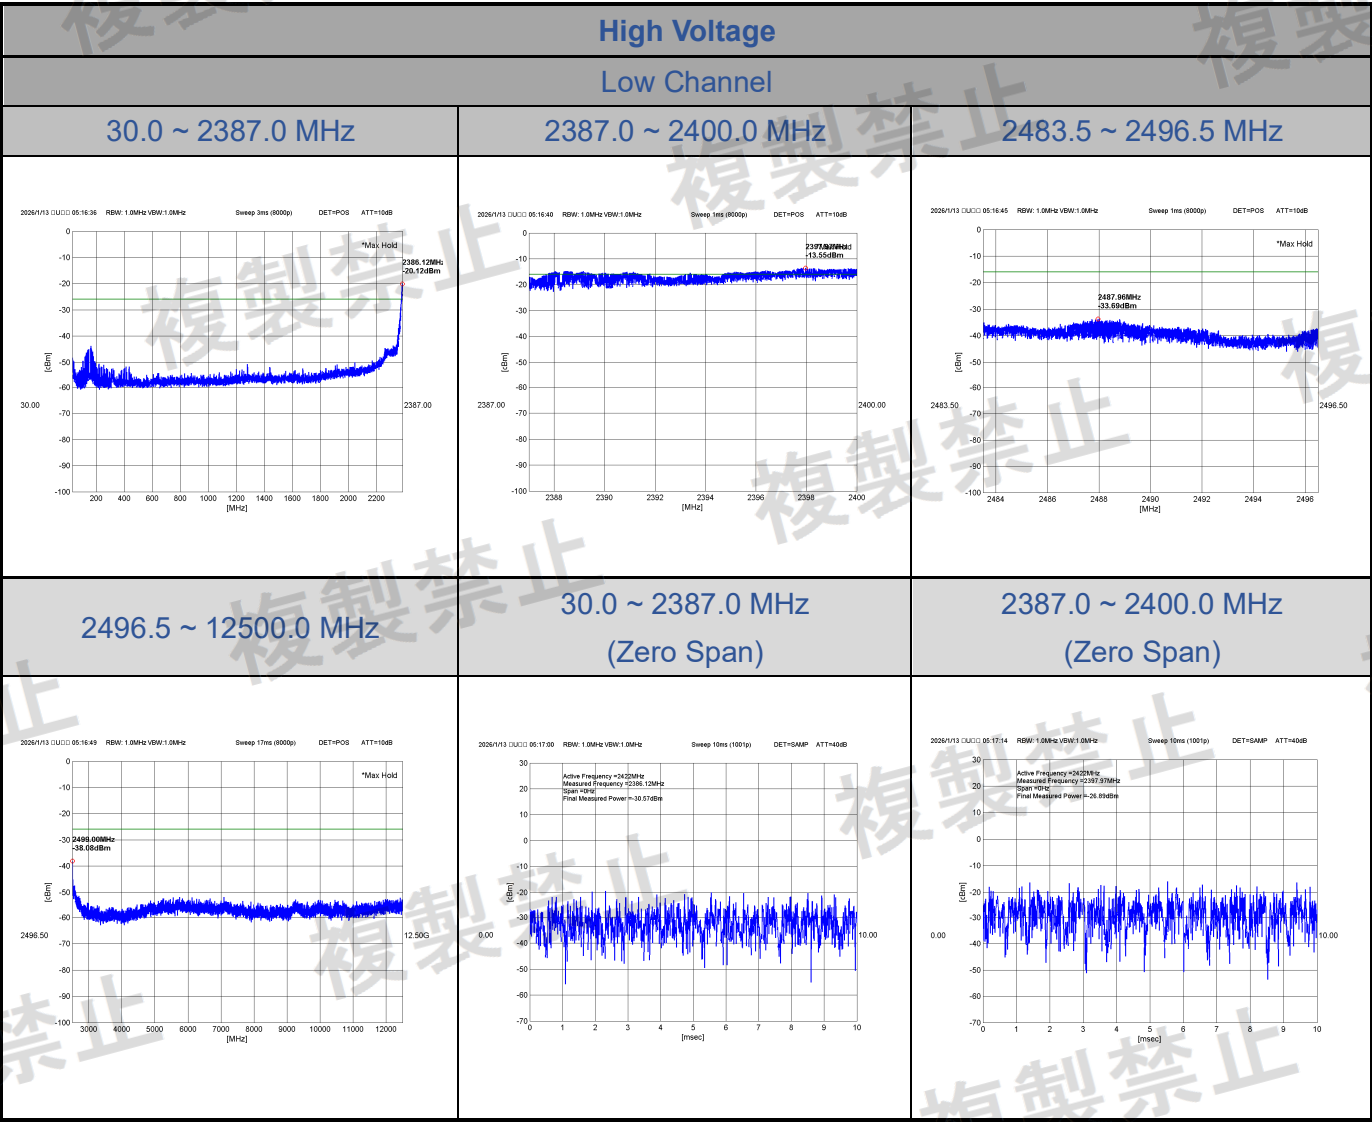

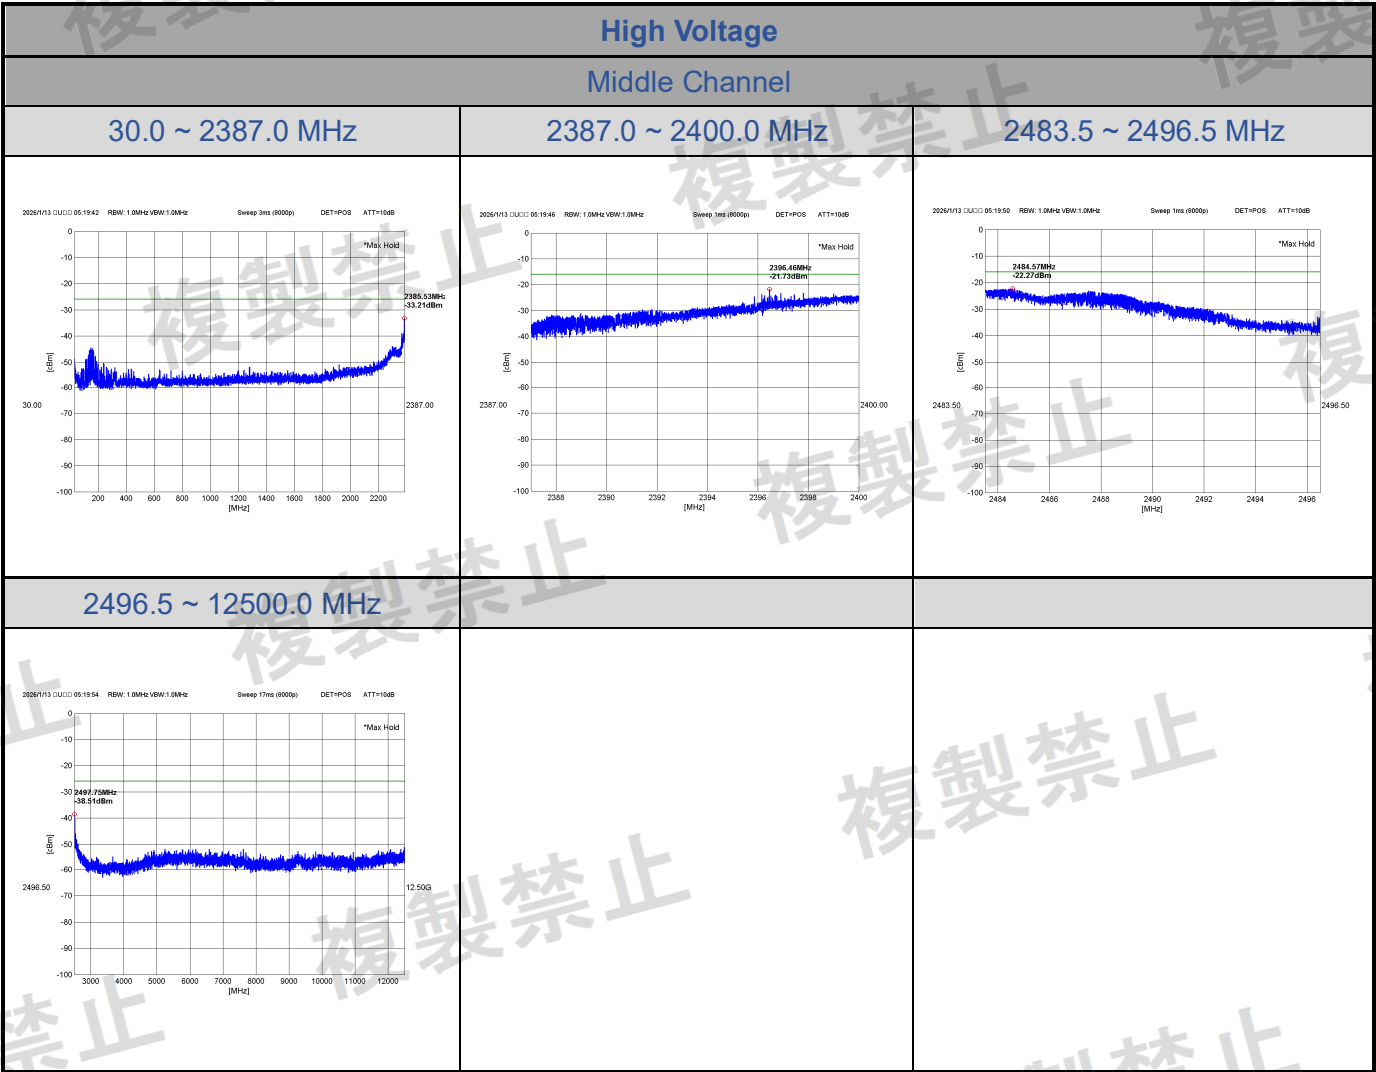


WiFi 2.4G Test Data


CN26VTXQ 001

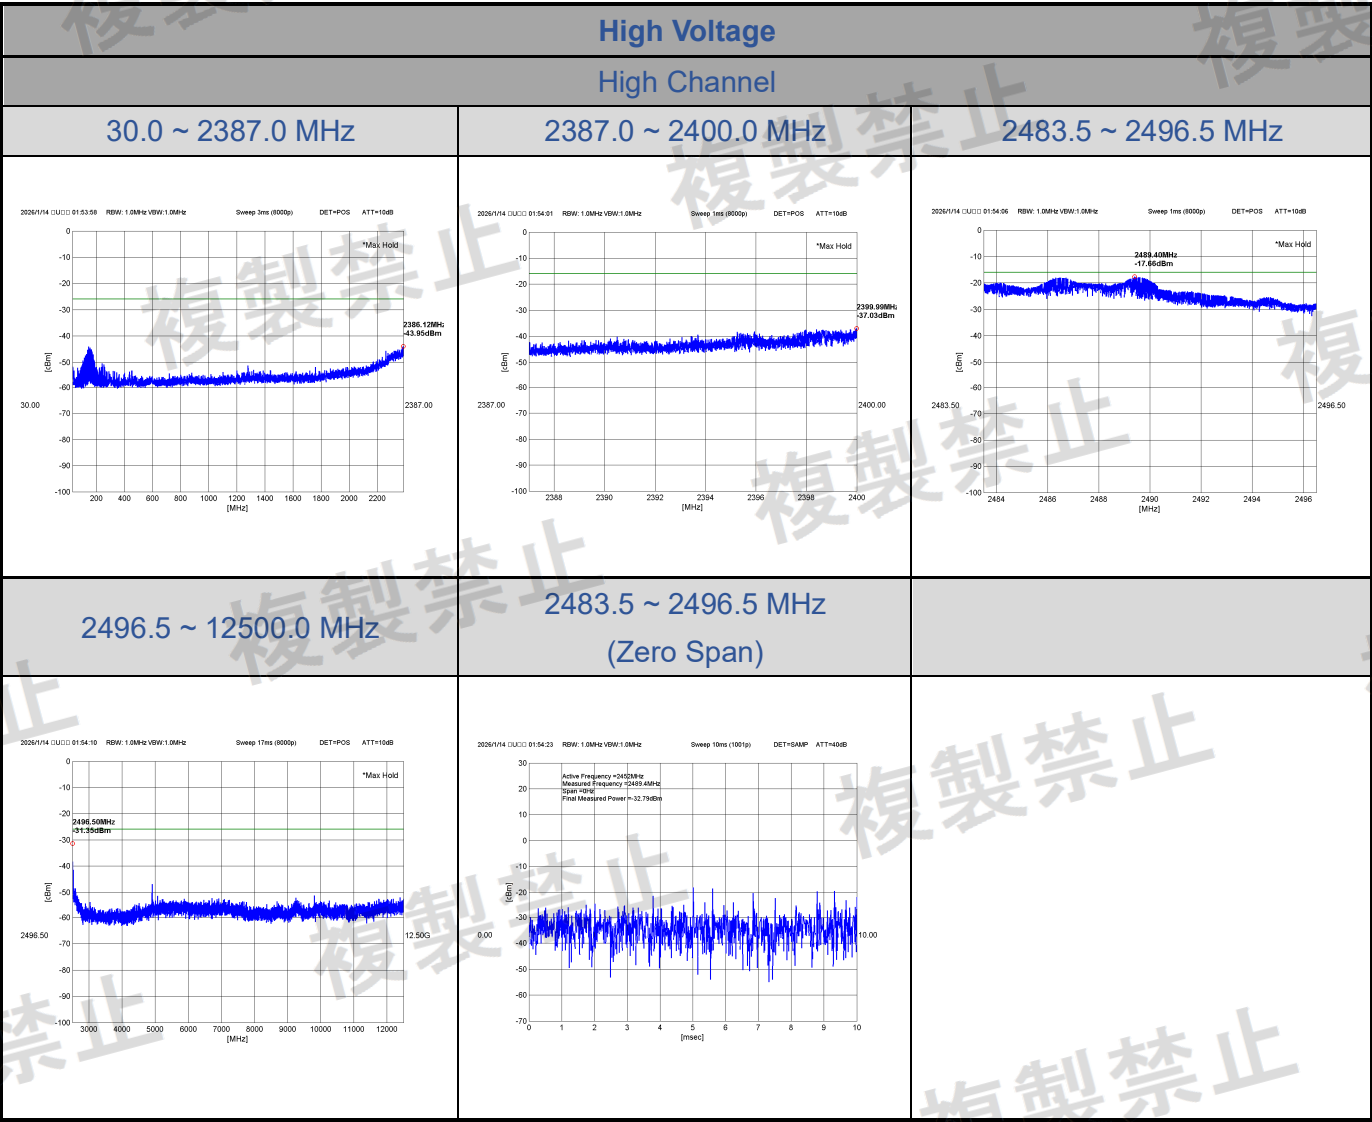


WiFi 2.4G Test Data

CN26VTXQ 001

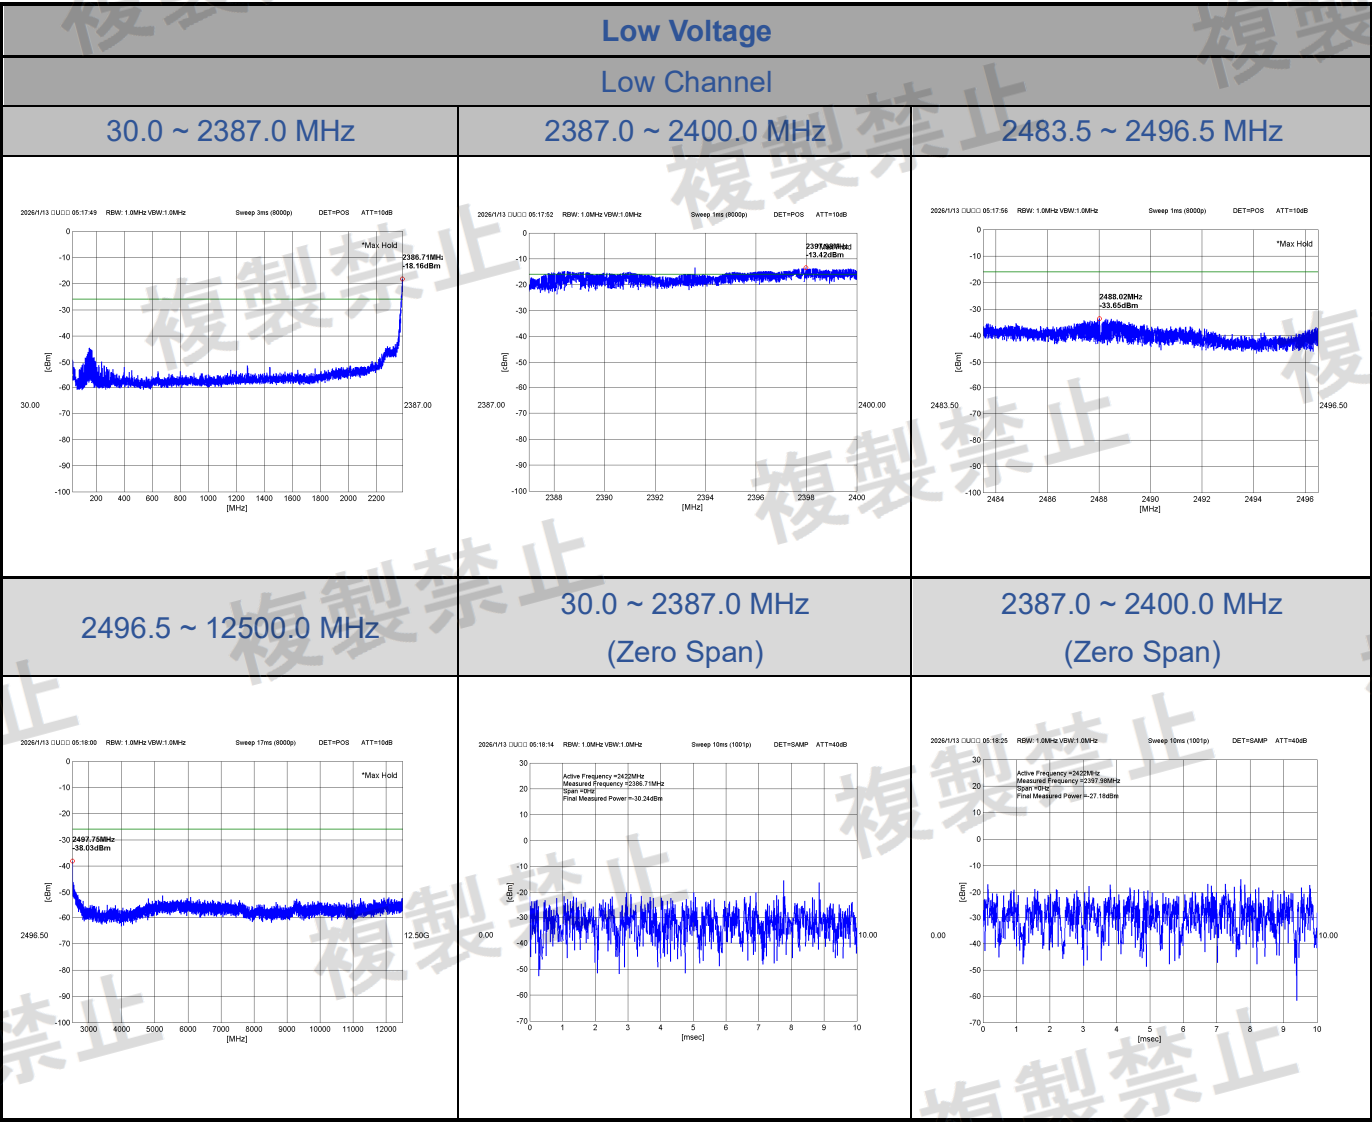

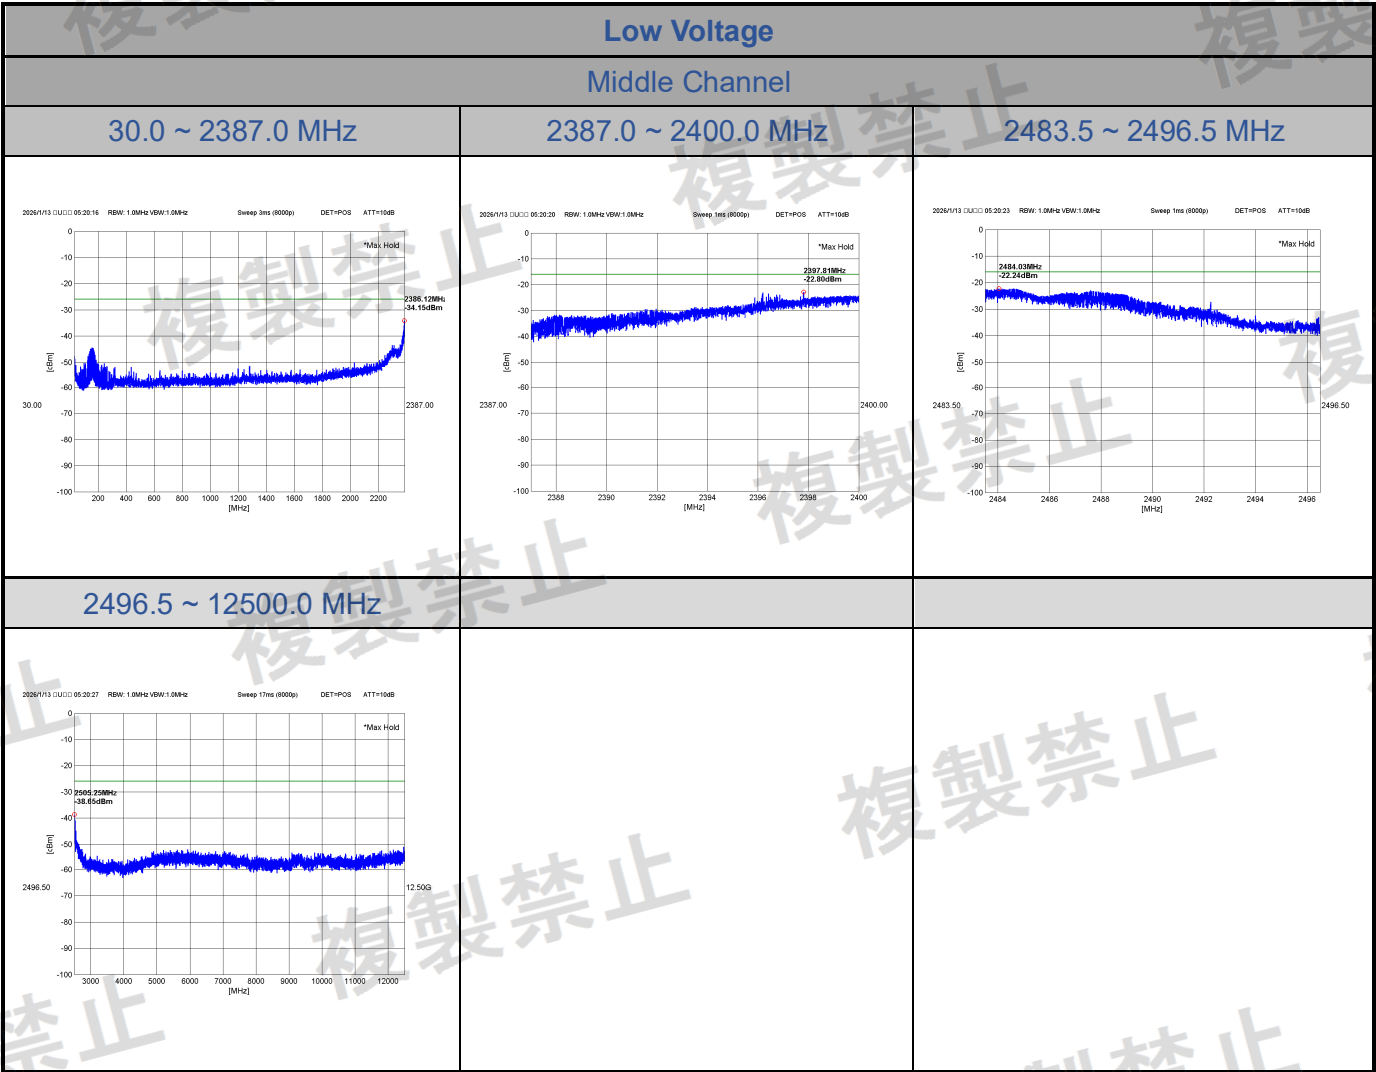

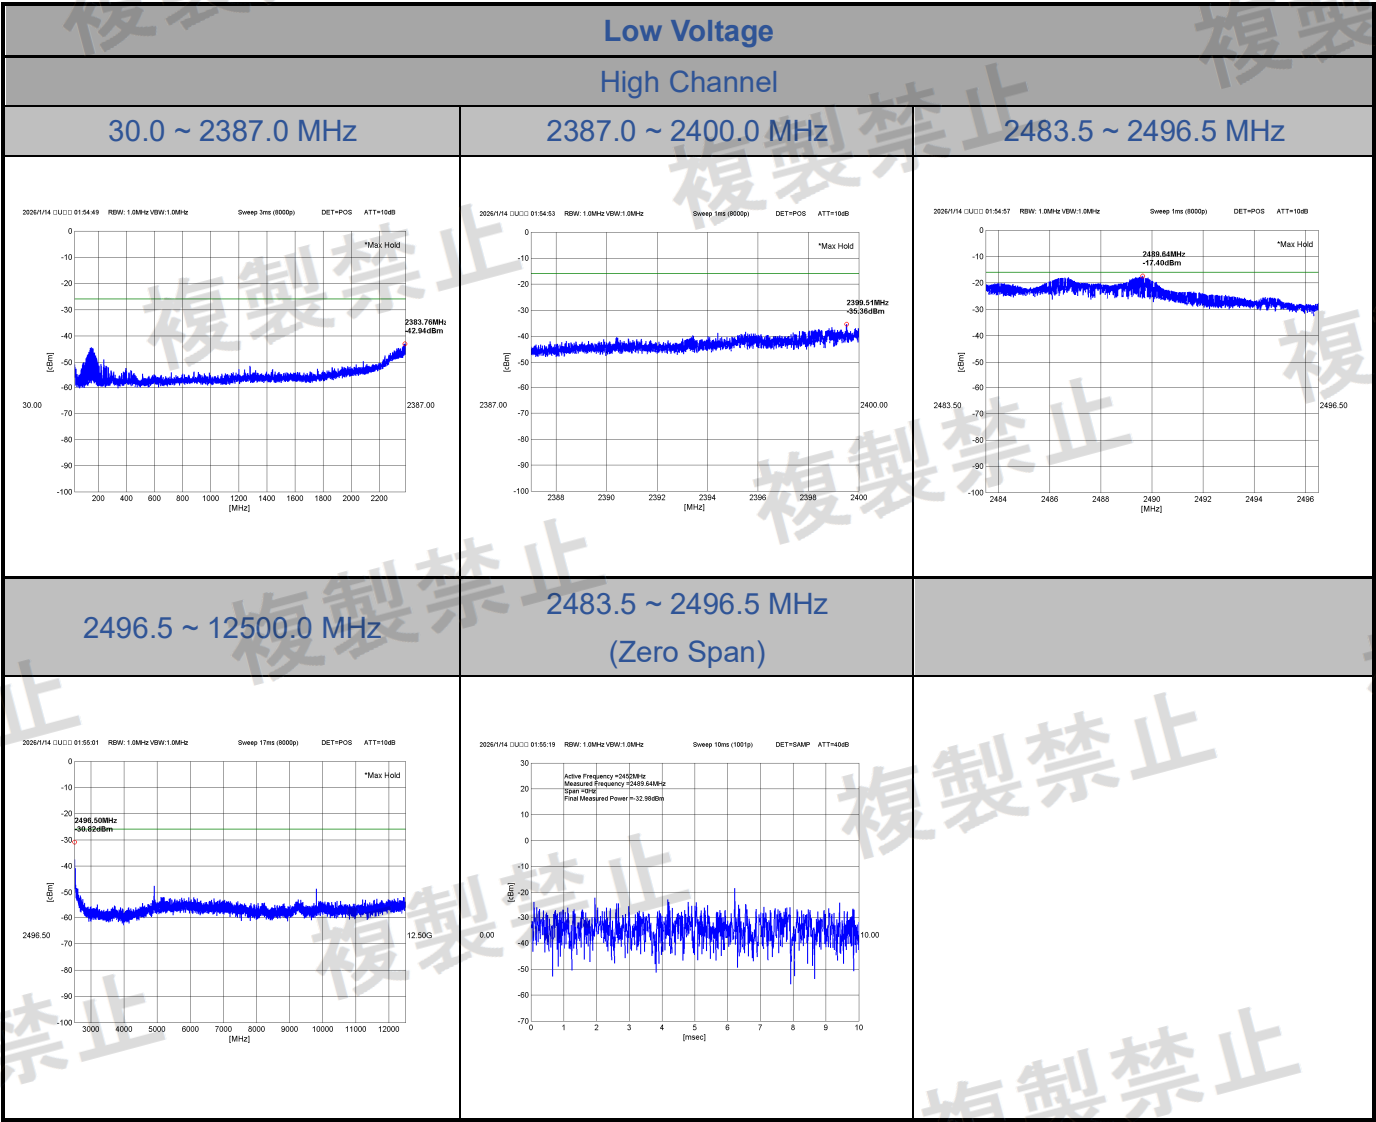


WiFi 2.4G Test Data

CN26VTXQ 001

Test Plots of Receiver Spurious Emissions


802.11b:2TX

<Chain 0>

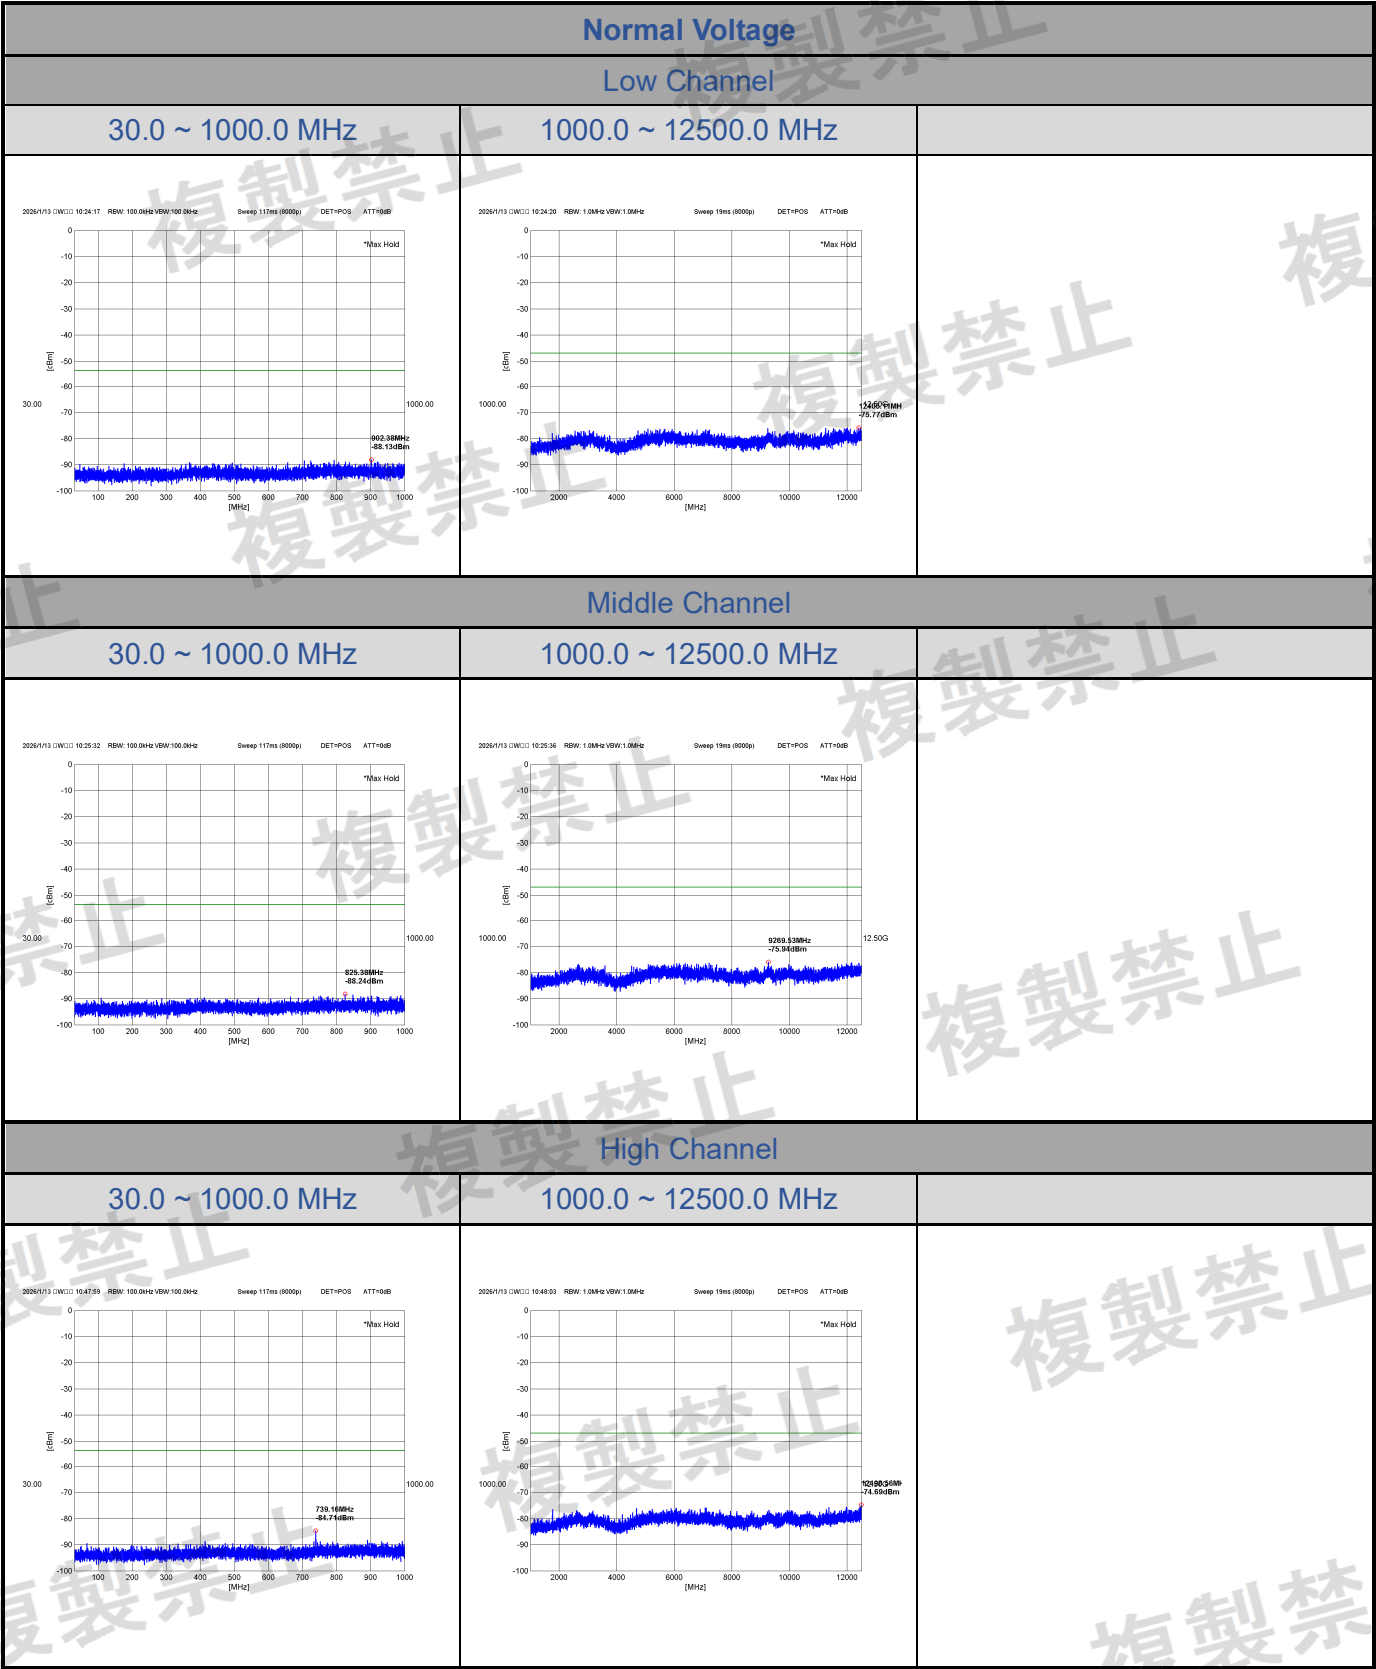


WiFi 2.4G Test Data

CN26VTXQ 001

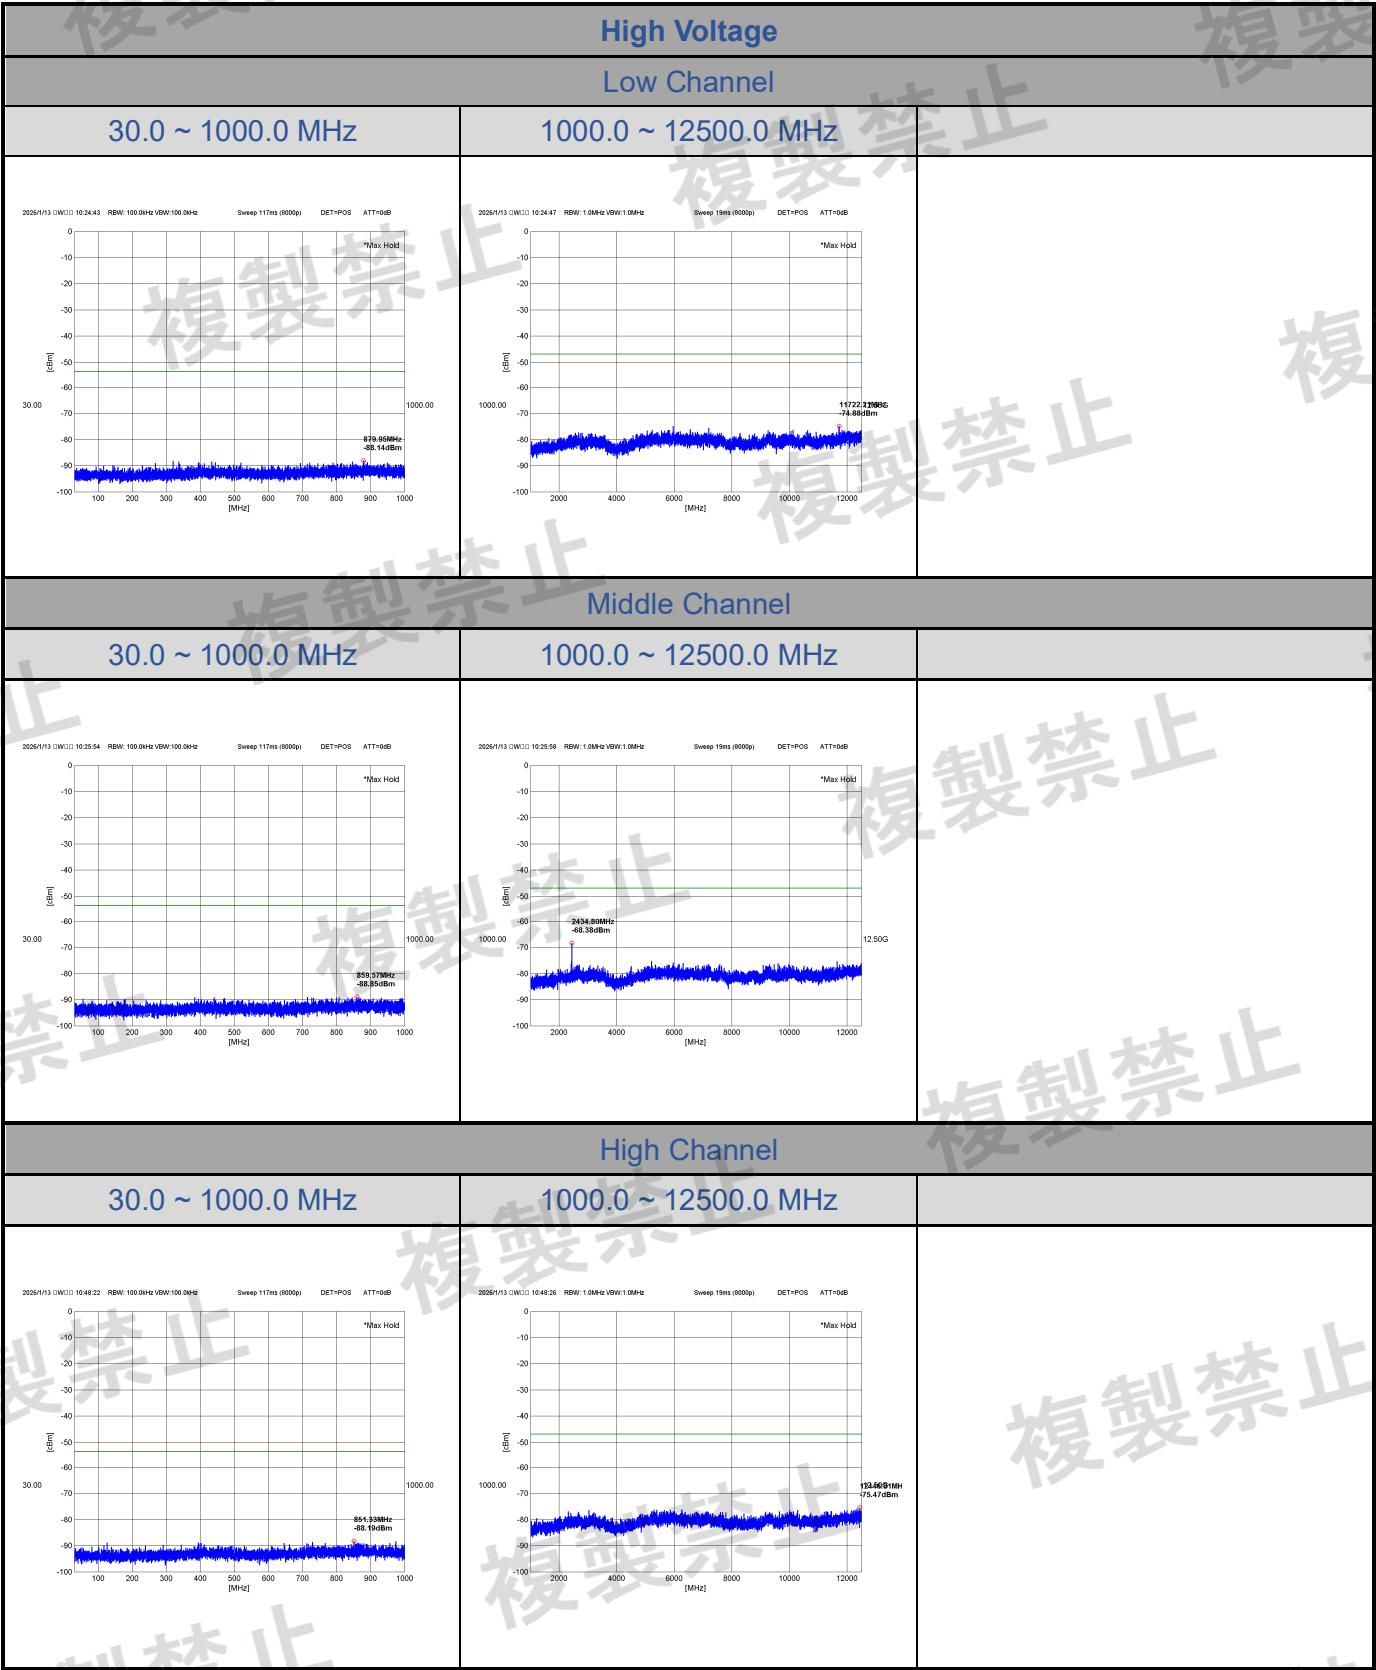

WiFi 2.4G Test Data

CN26VTXQ 001

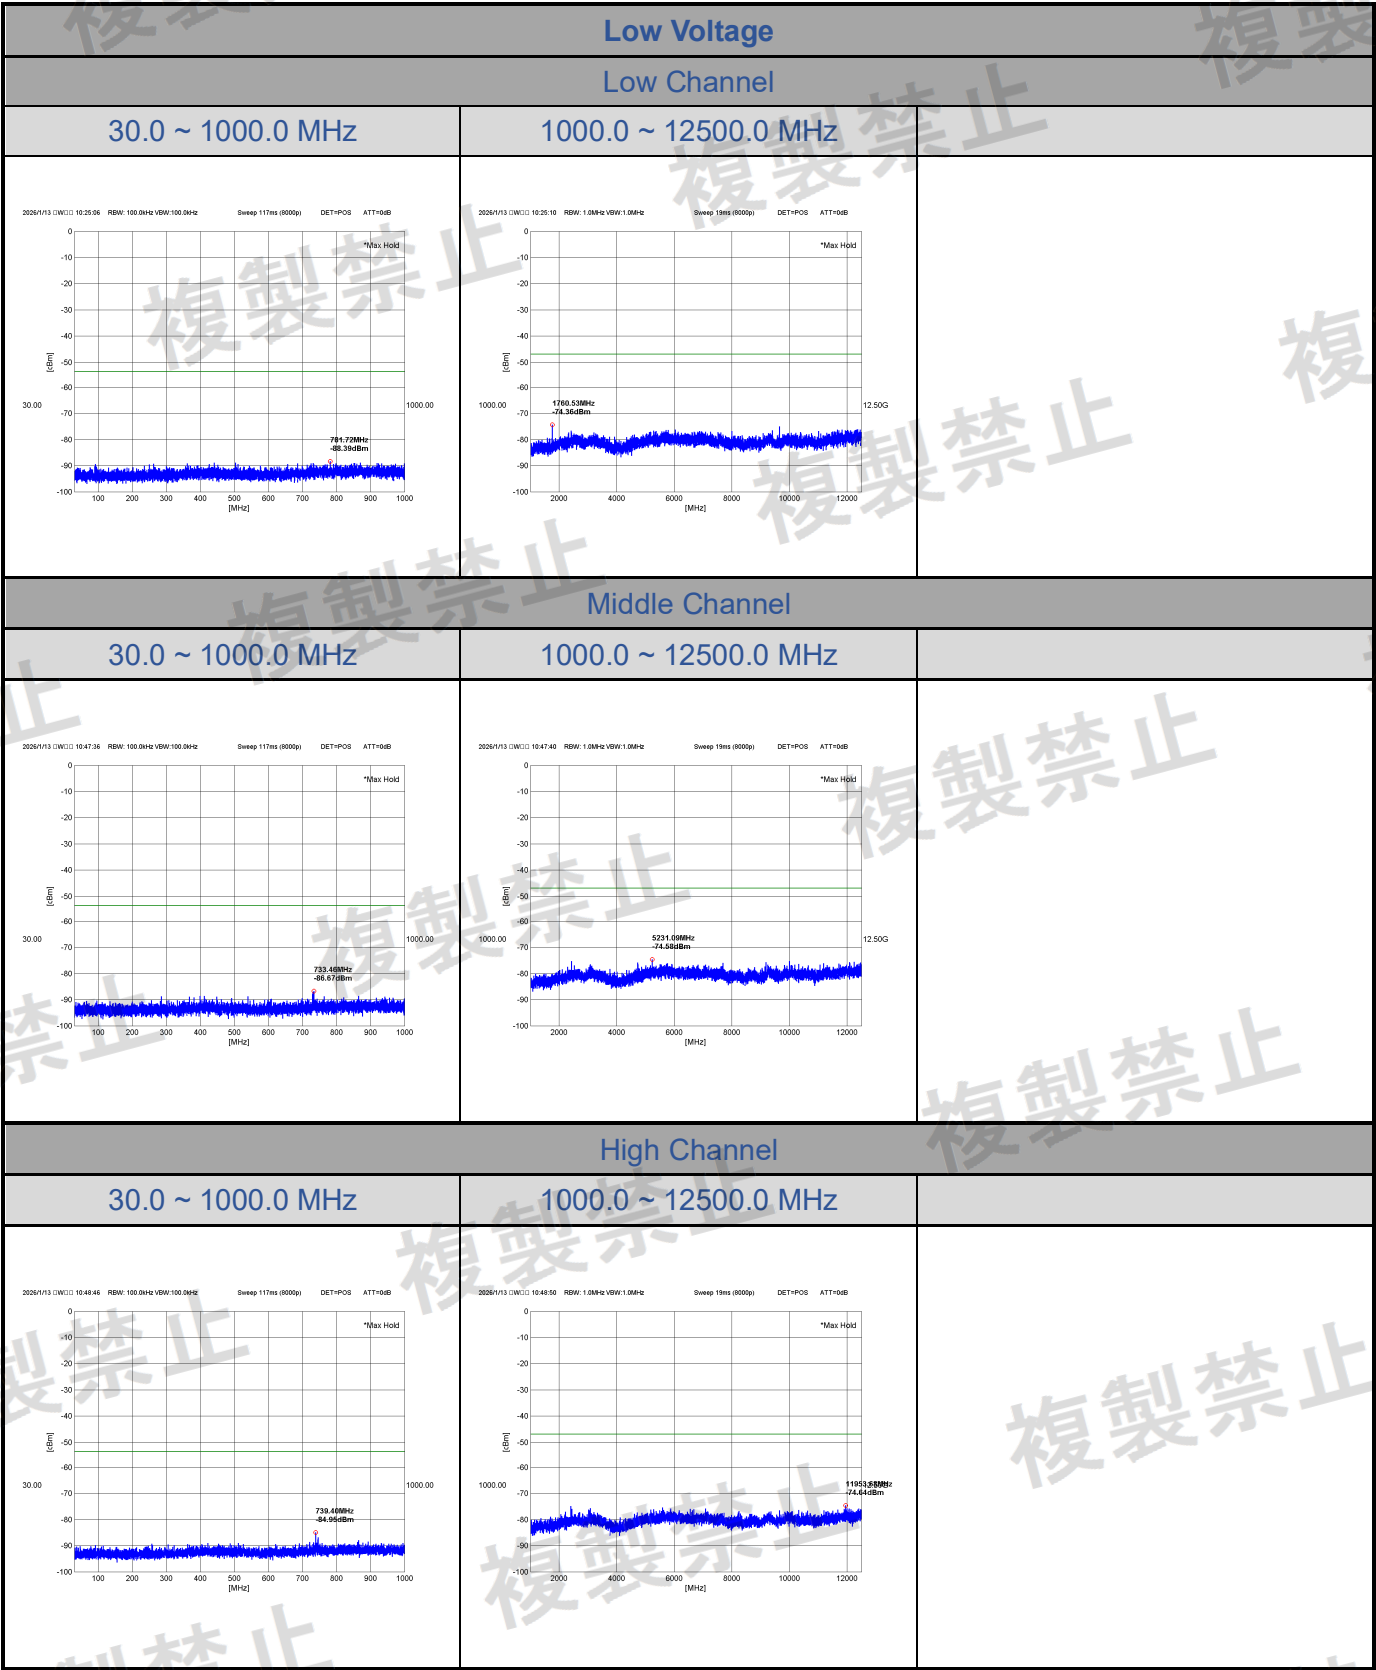


WiFi 2.4G Test Data

CN26VTXQ 001


802.11b:2TX

<Chain 1>

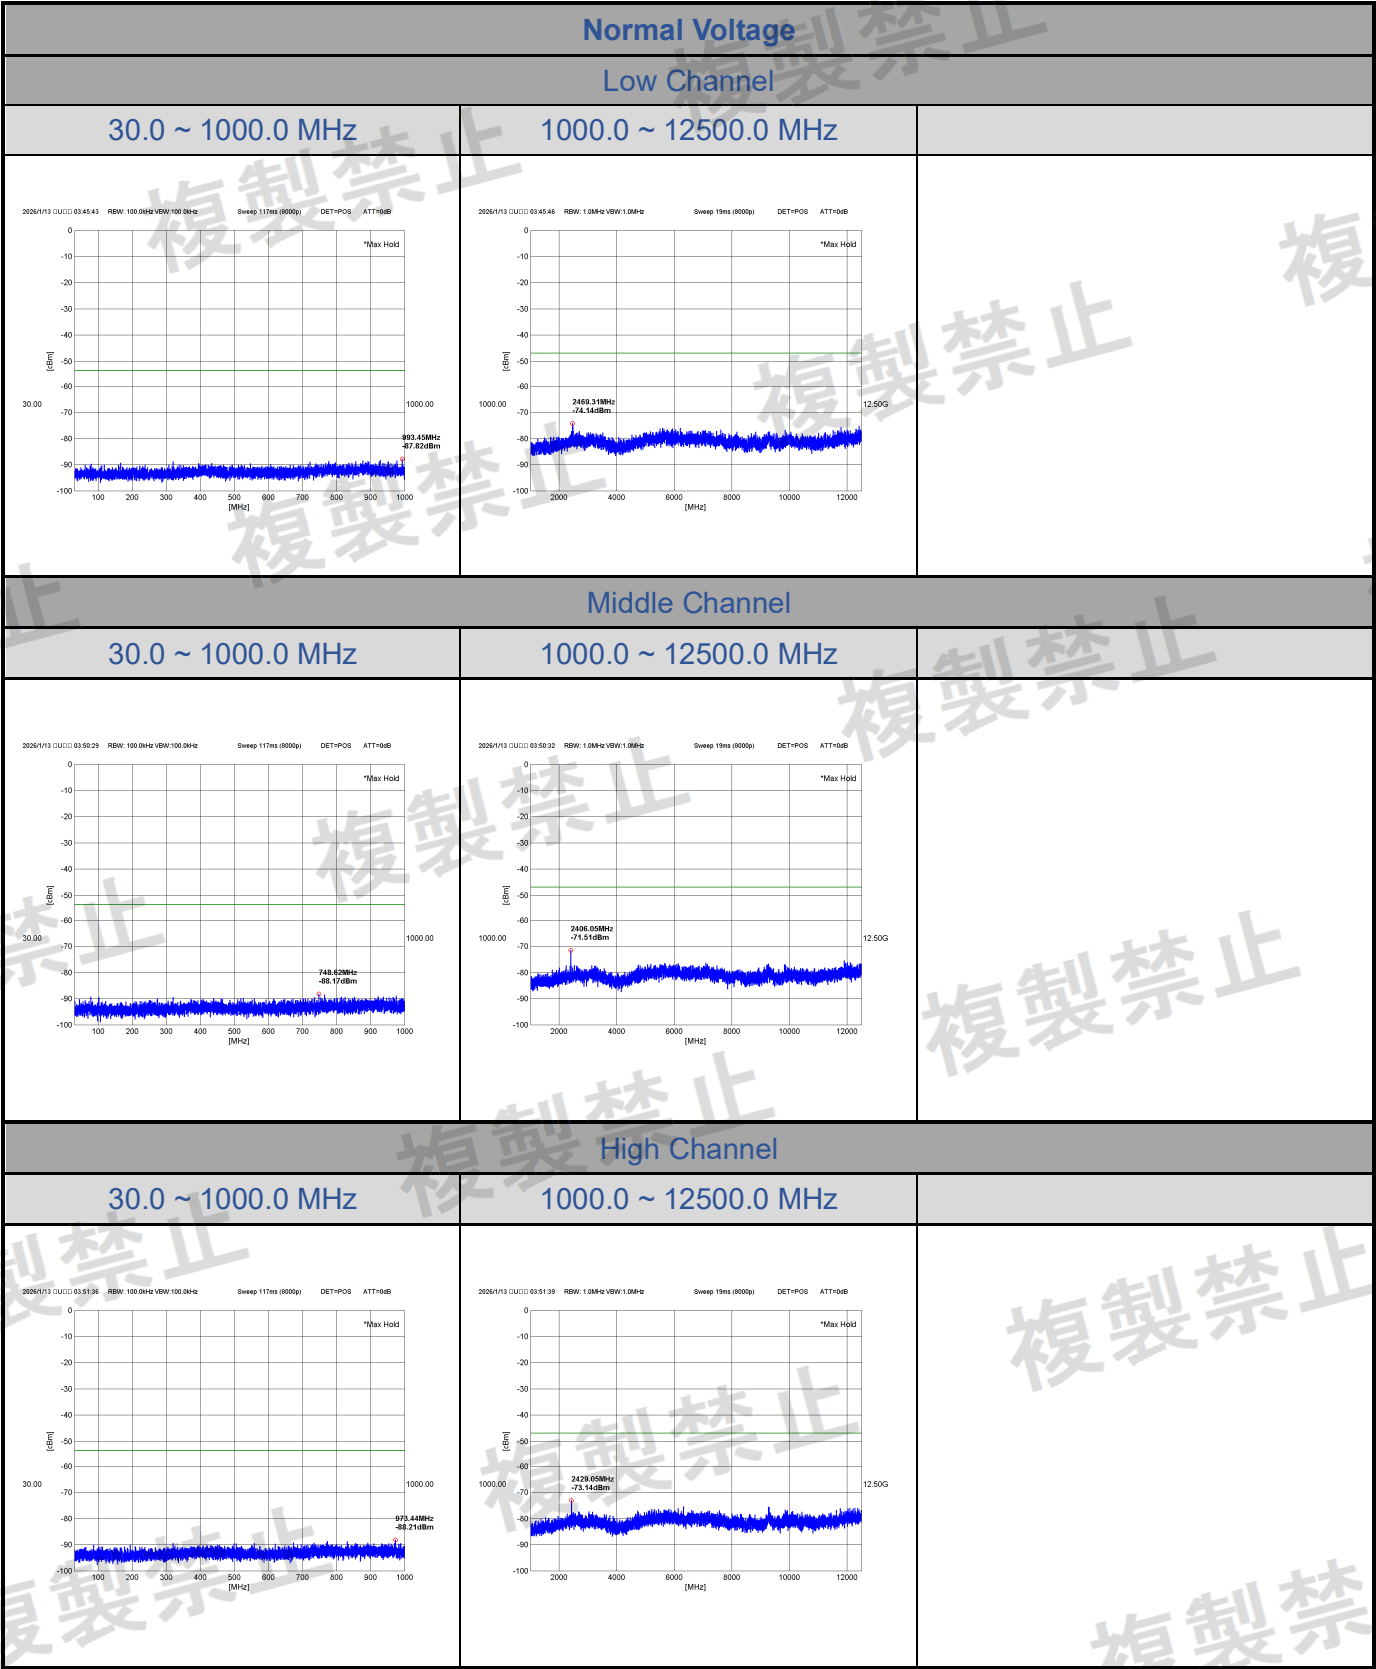


WiFi 2.4G Test Data

CN26VTXQ 001

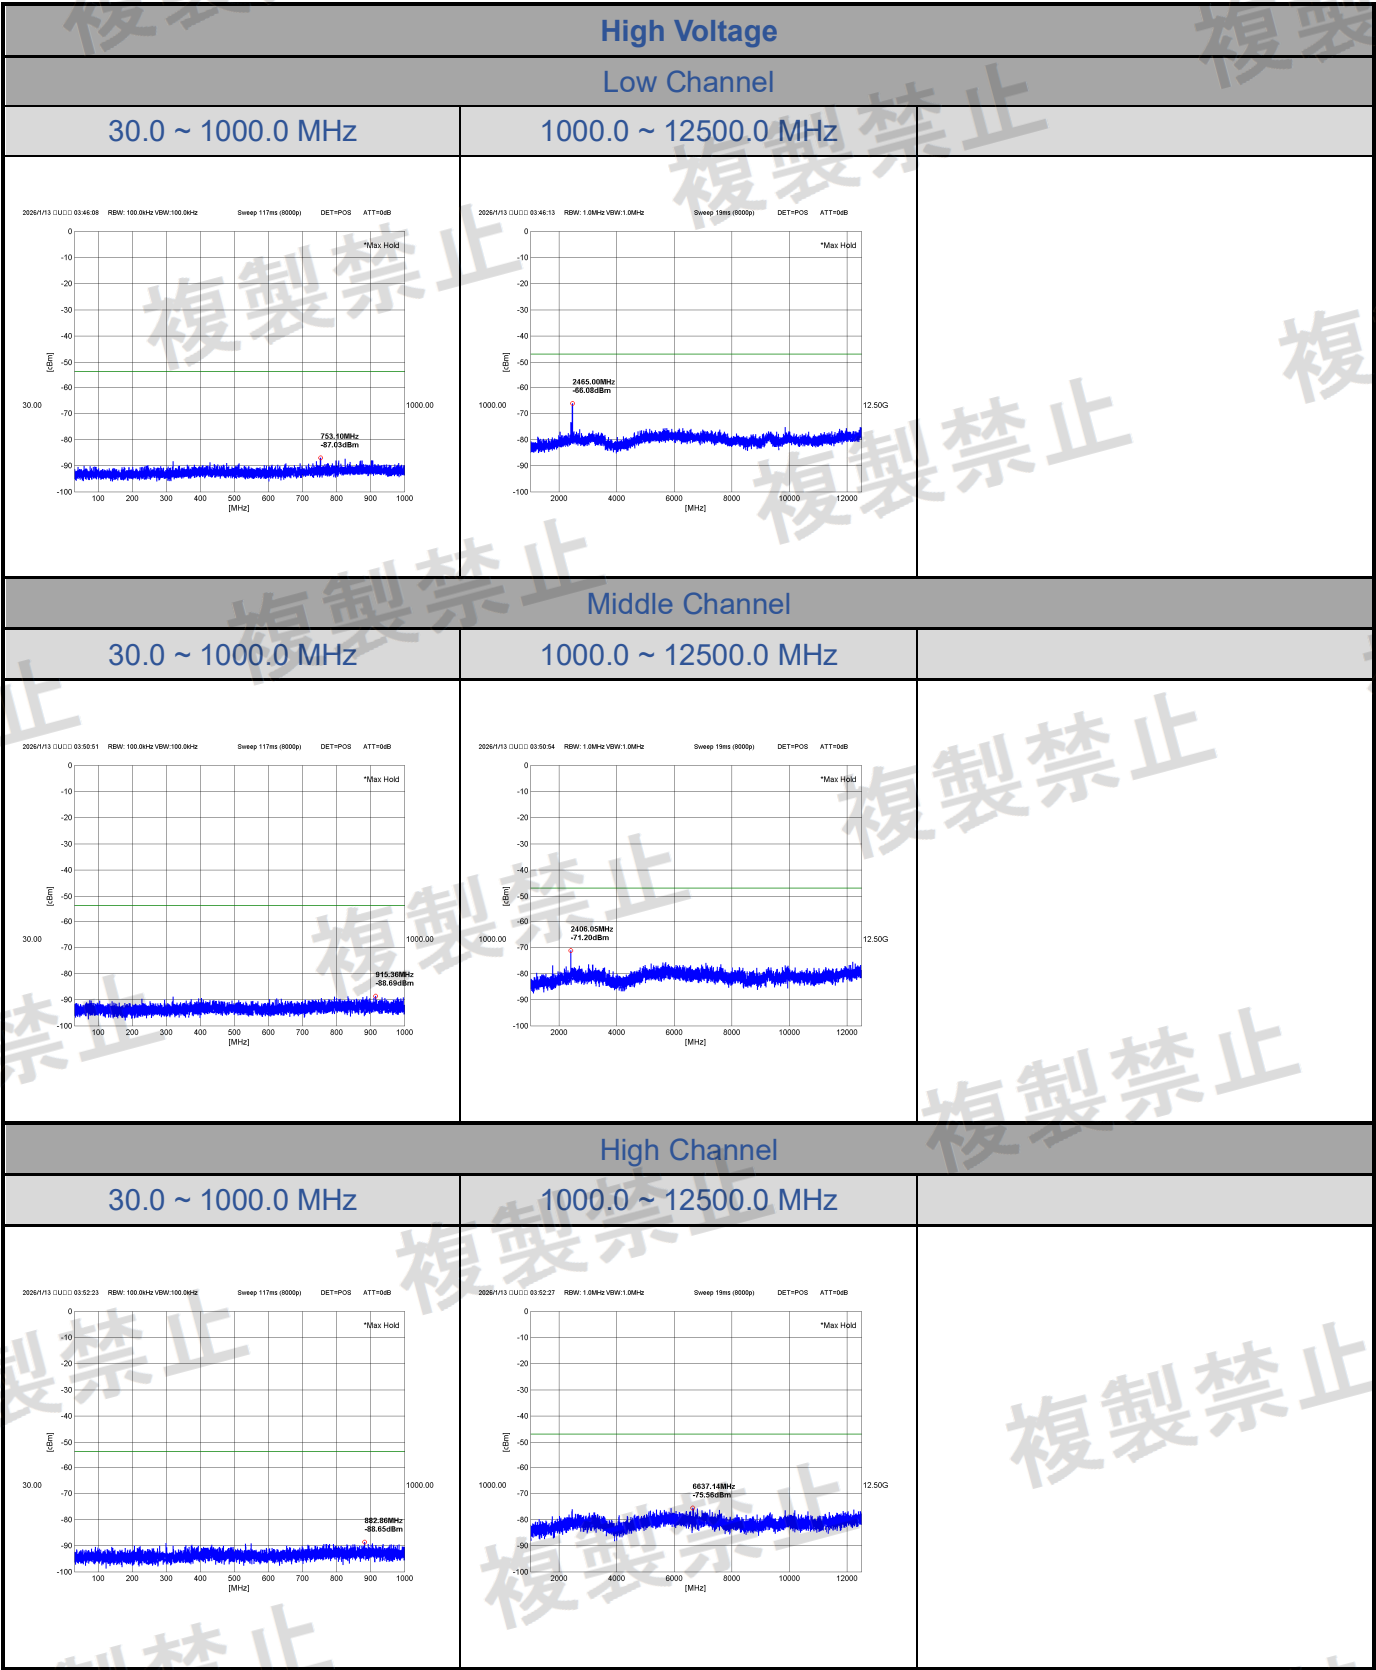

WiFi 2.4G Test Data


CN26VTXQ 001

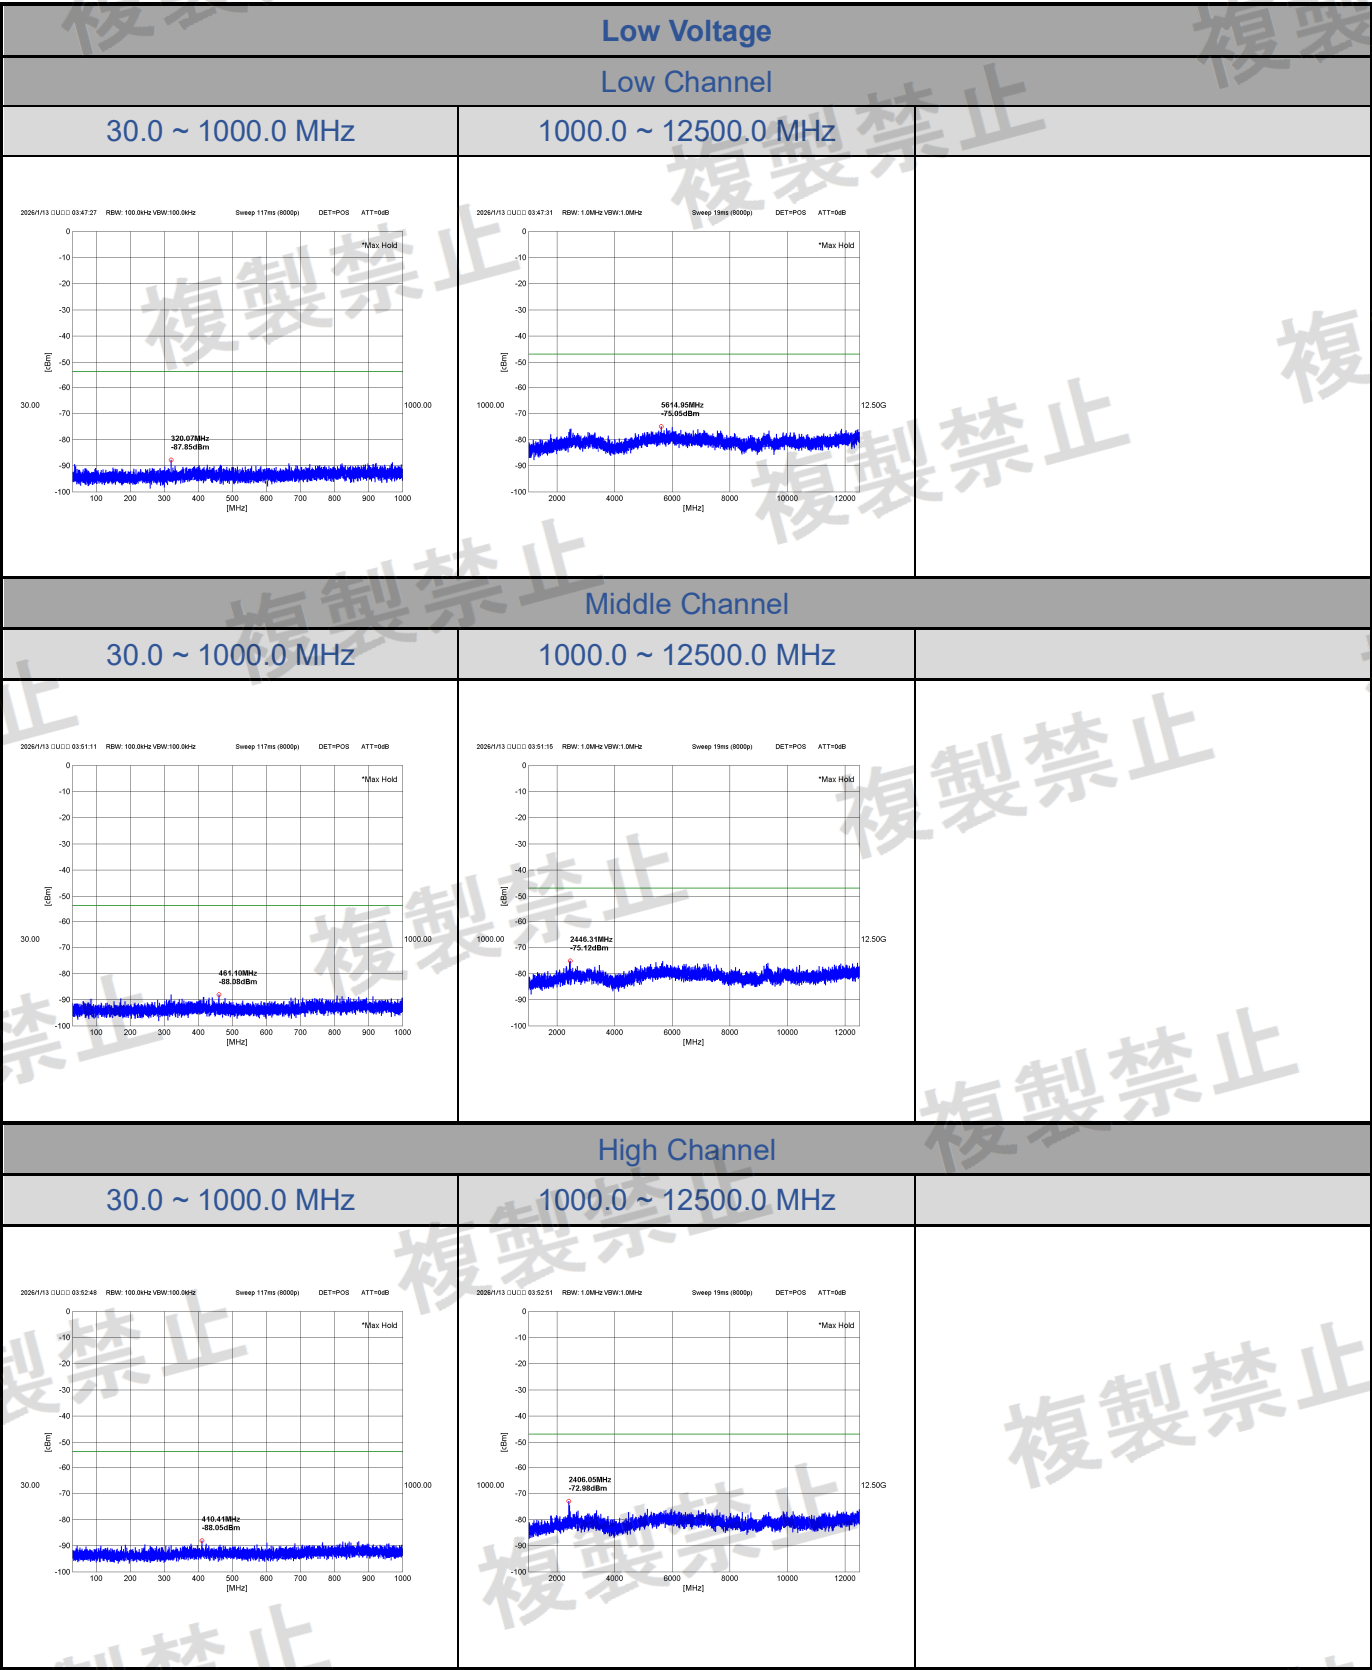

WiFi 2.4G Test Data


CN26VTXQ 001

802.11g
<Chain 0>

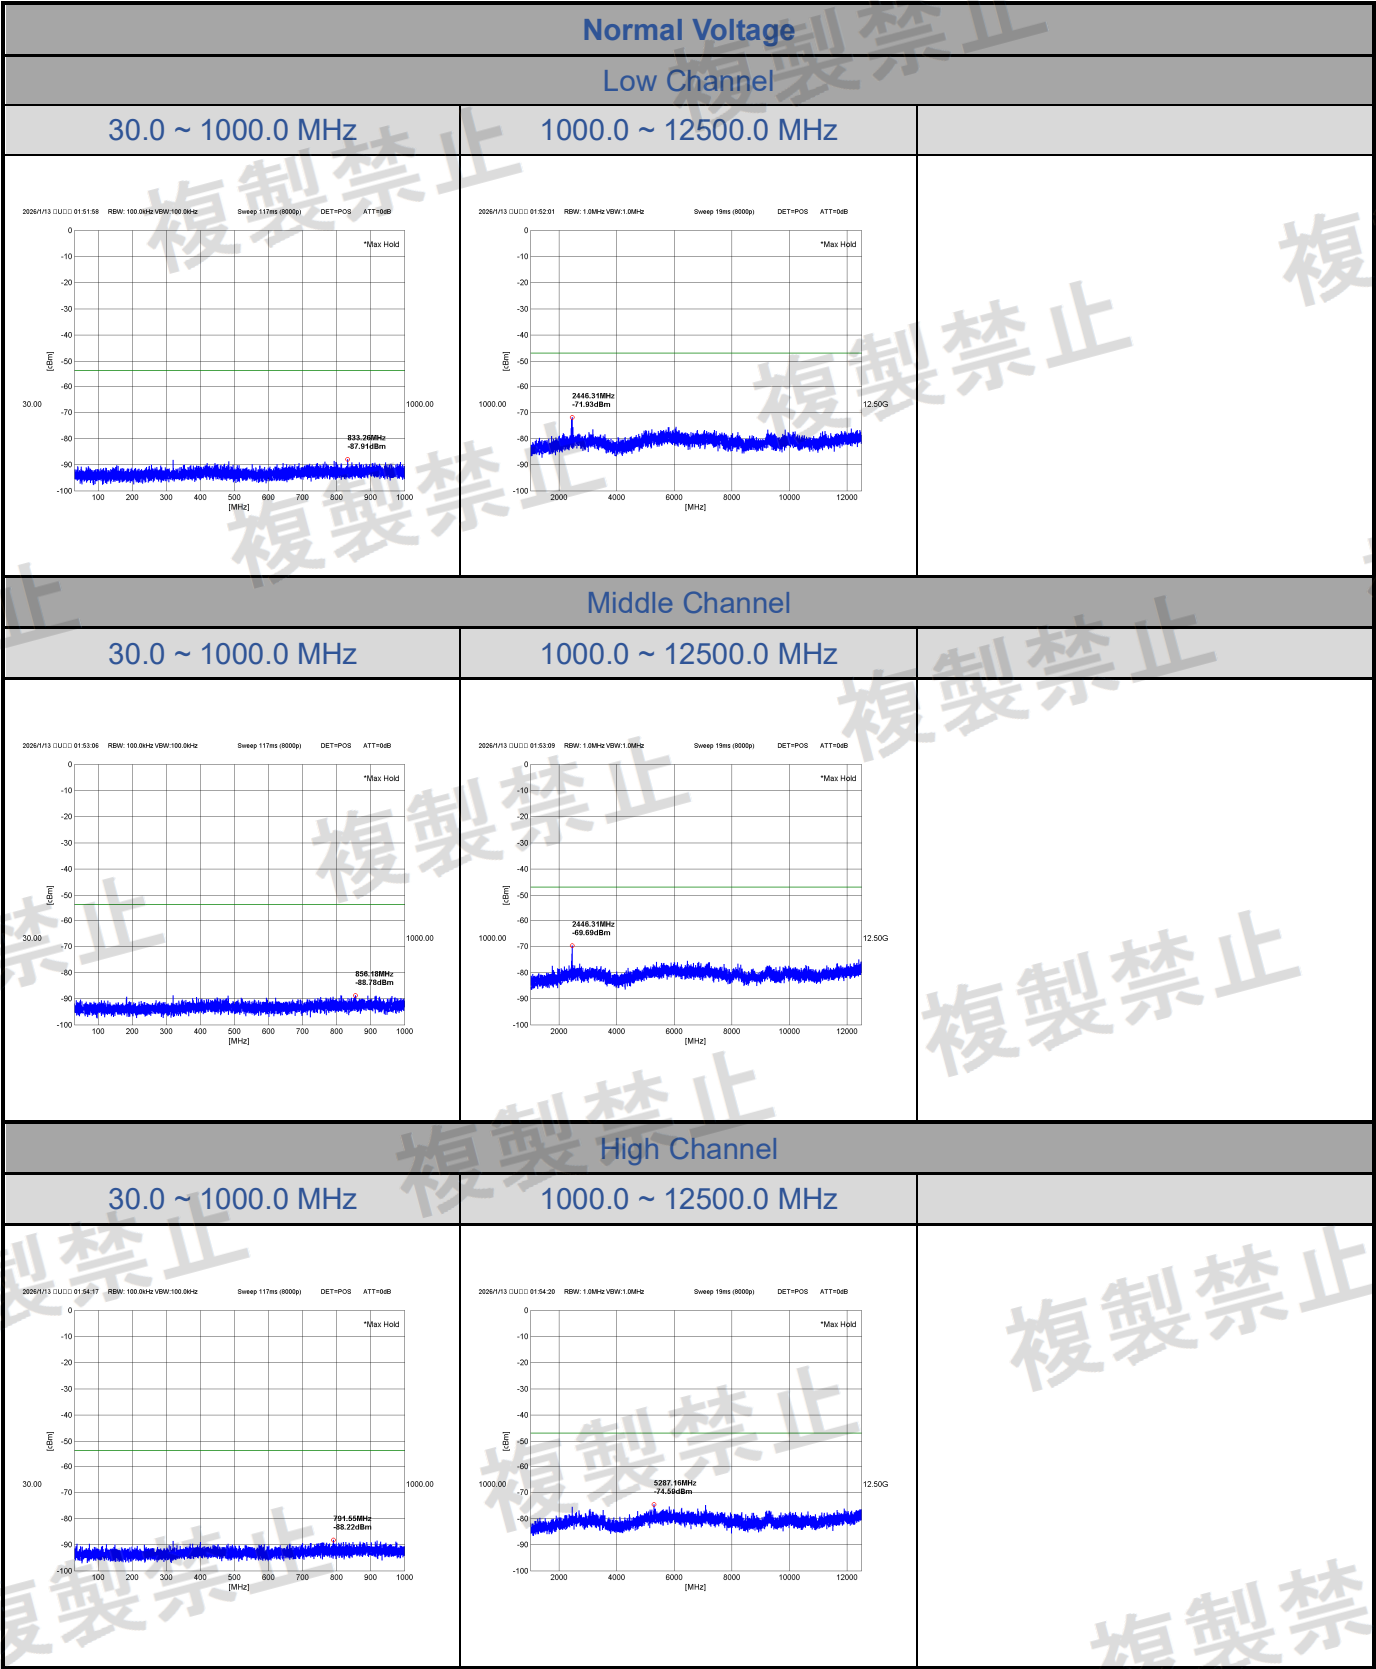


WiFi 2.4G Test Data

CN26VTXQ 001

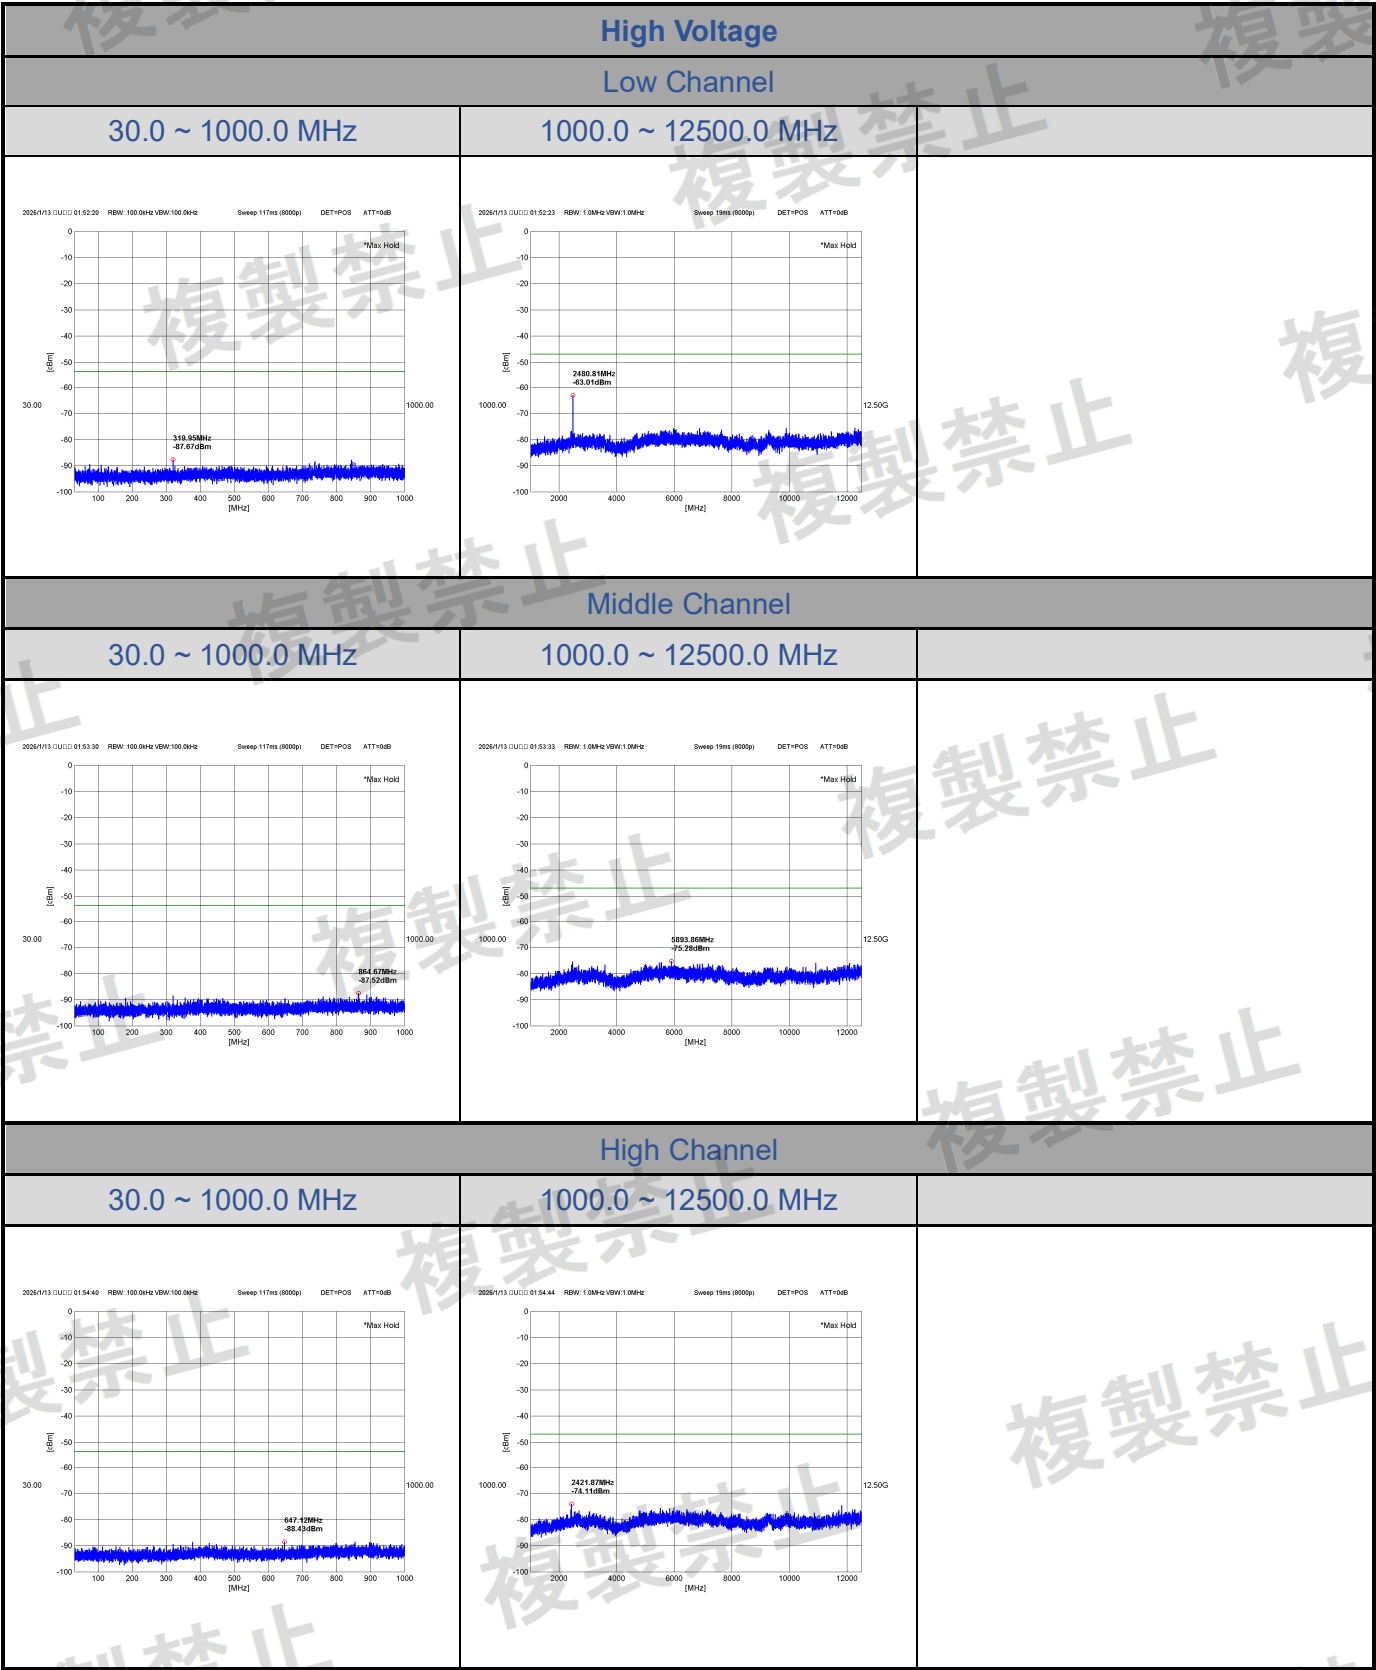

WiFi 2.4G Test Data

CN26VTXQ 001

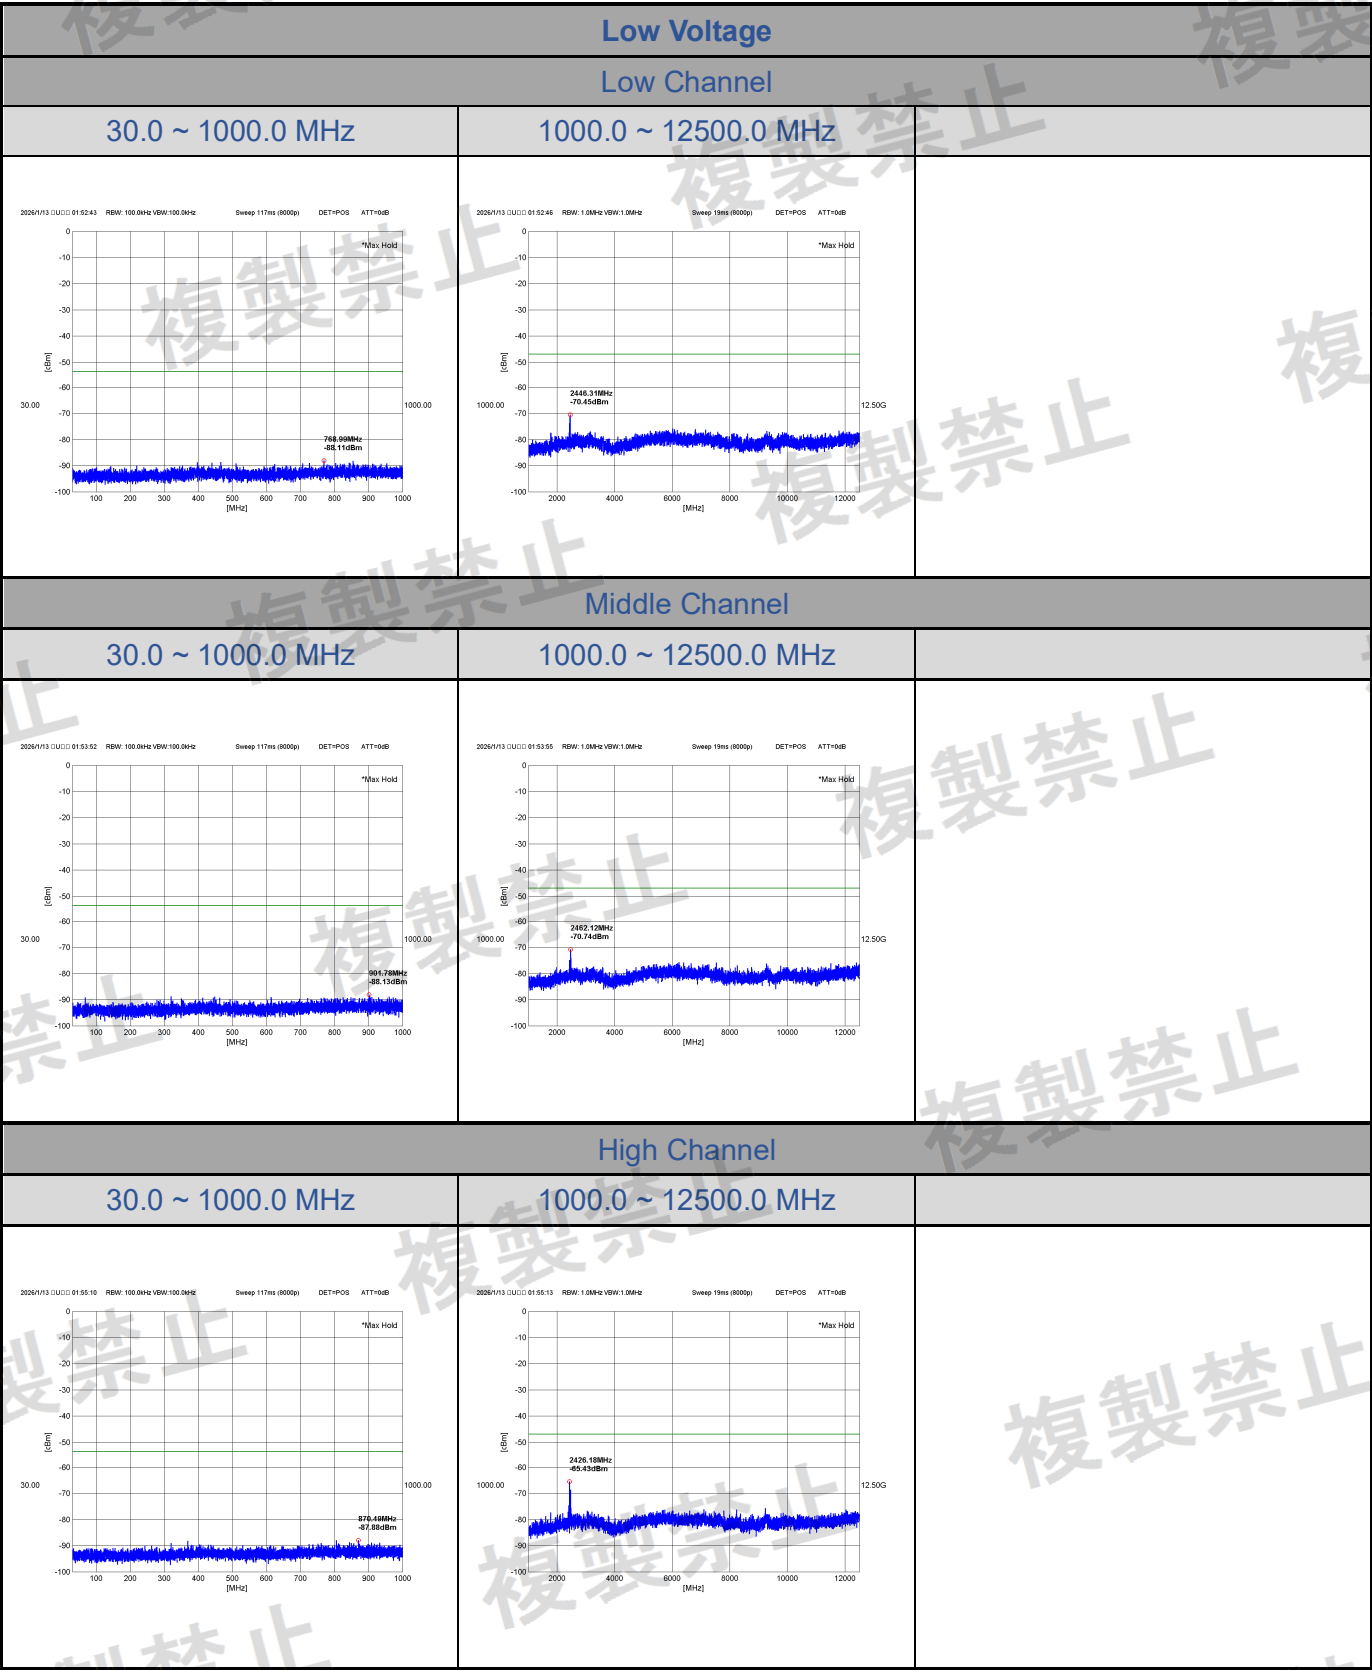


WiFi 2.4G Test Data

CN26VTXQ 001


802.11g:2TX

<Chain 1>

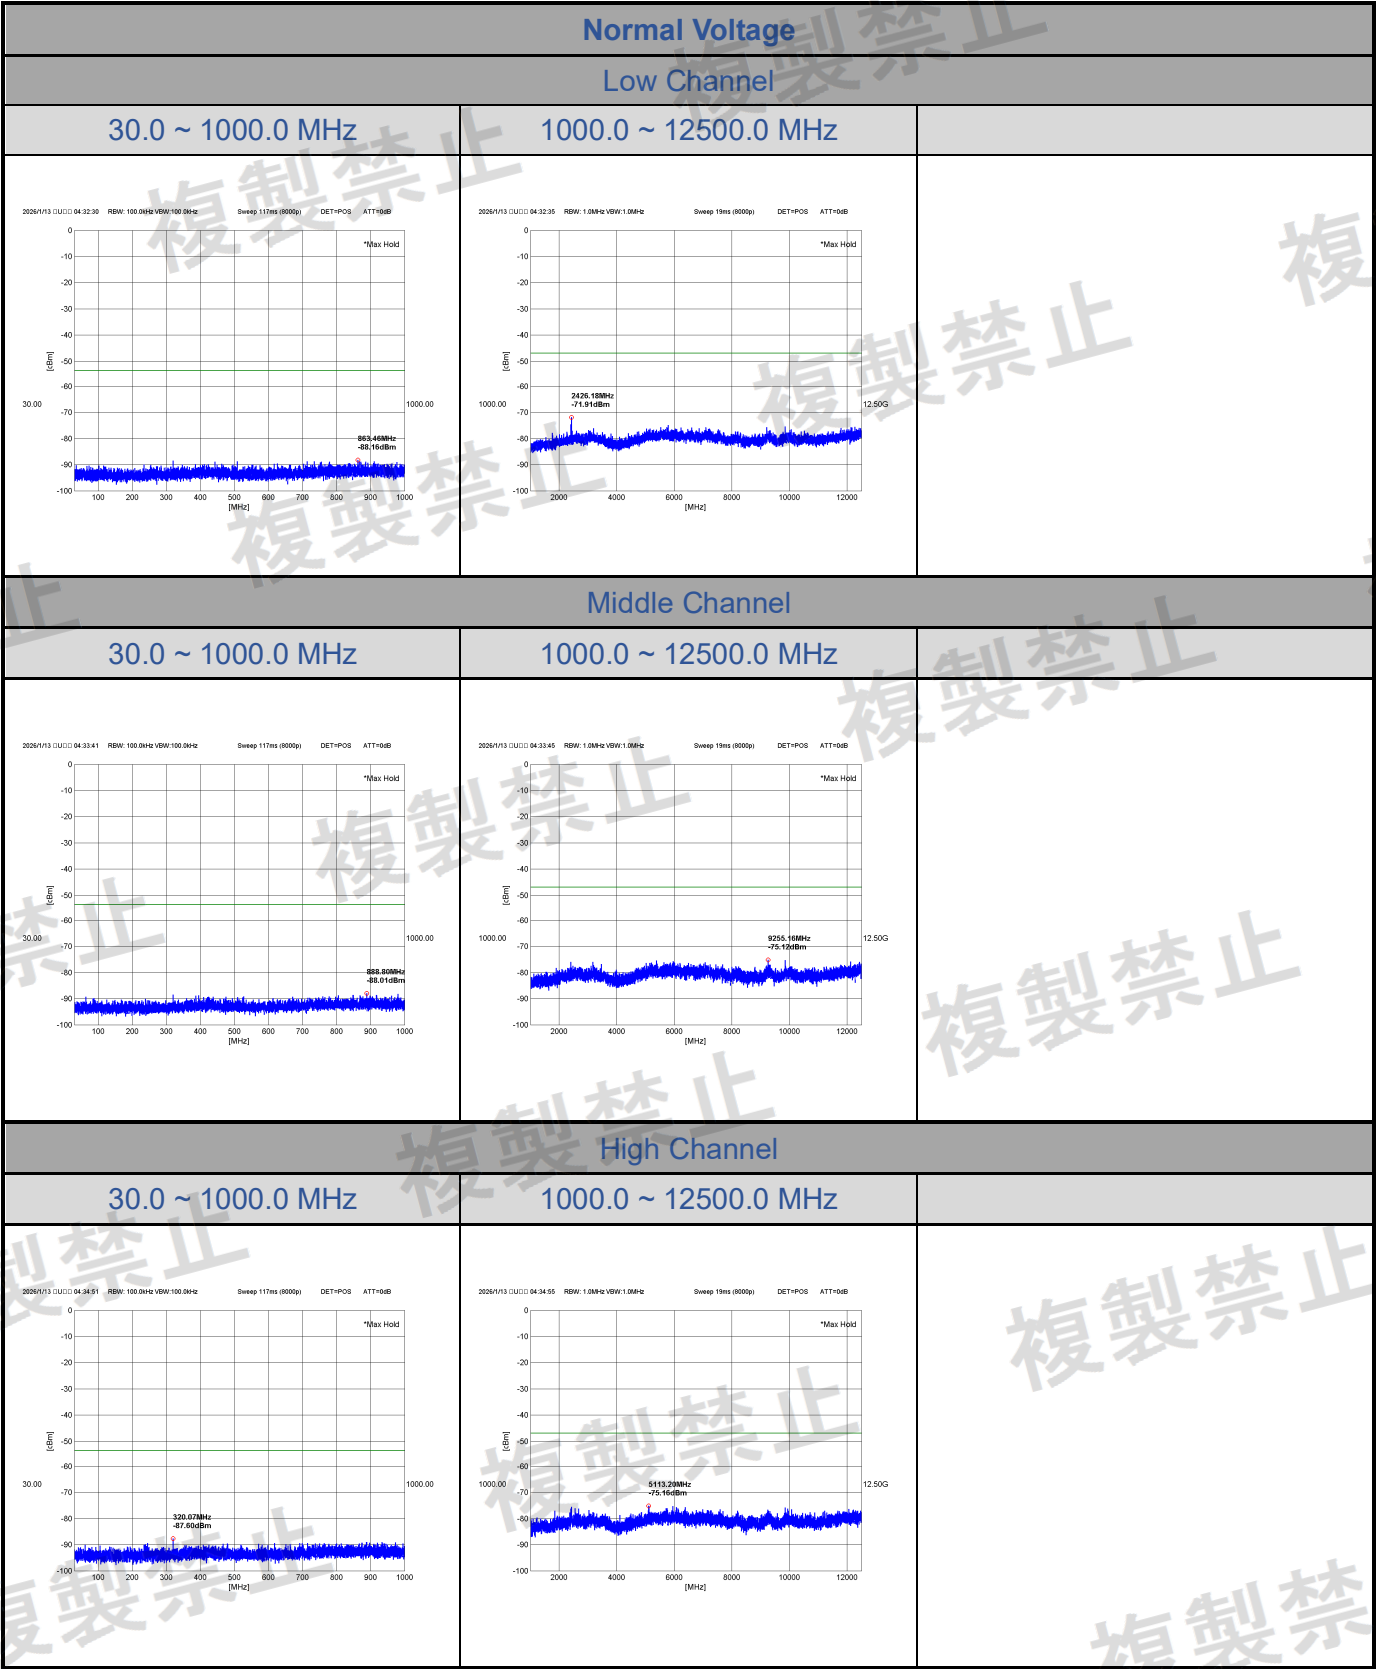


WiFi 2.4G Test Data

CN26VTXQ 001

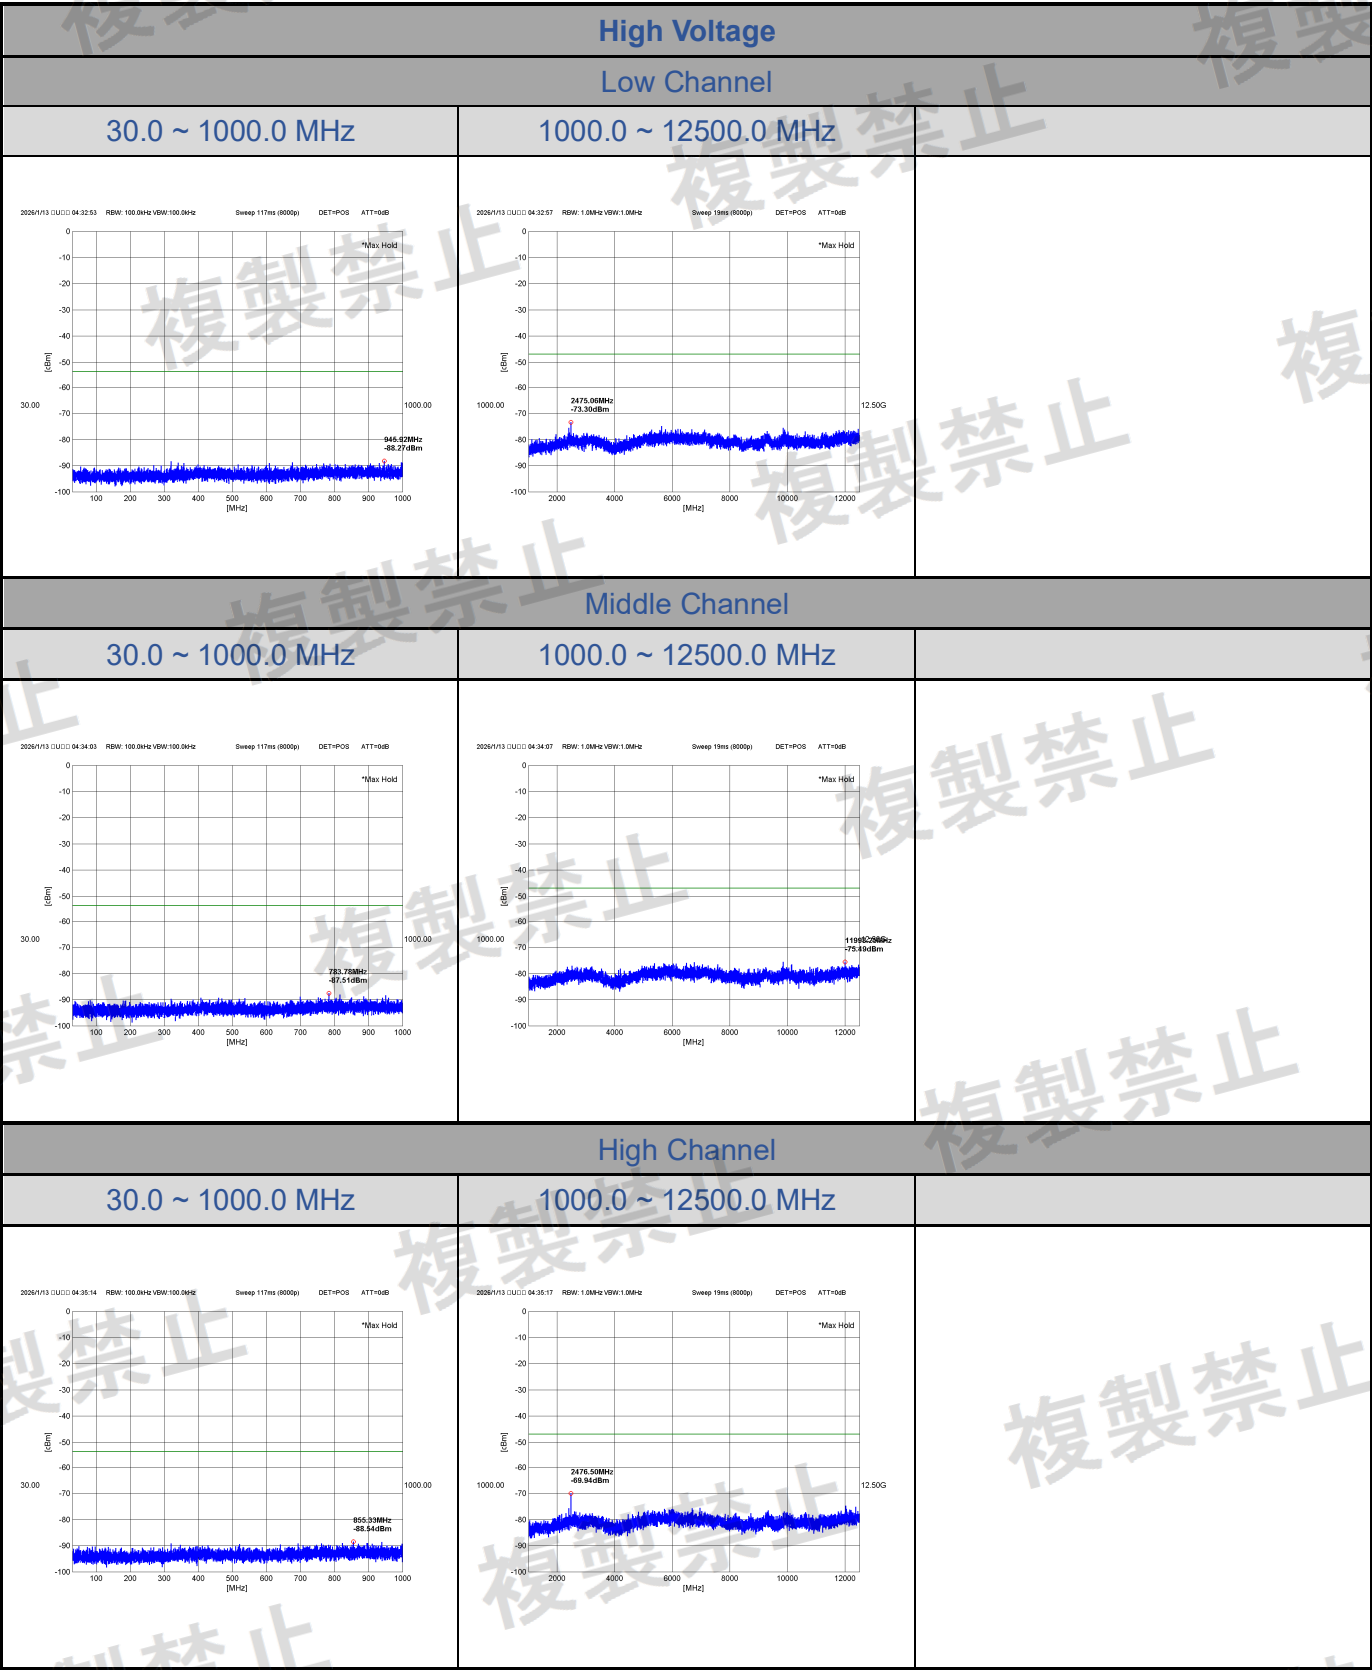

WiFi 2.4G Test Data

CN26VTXQ 001

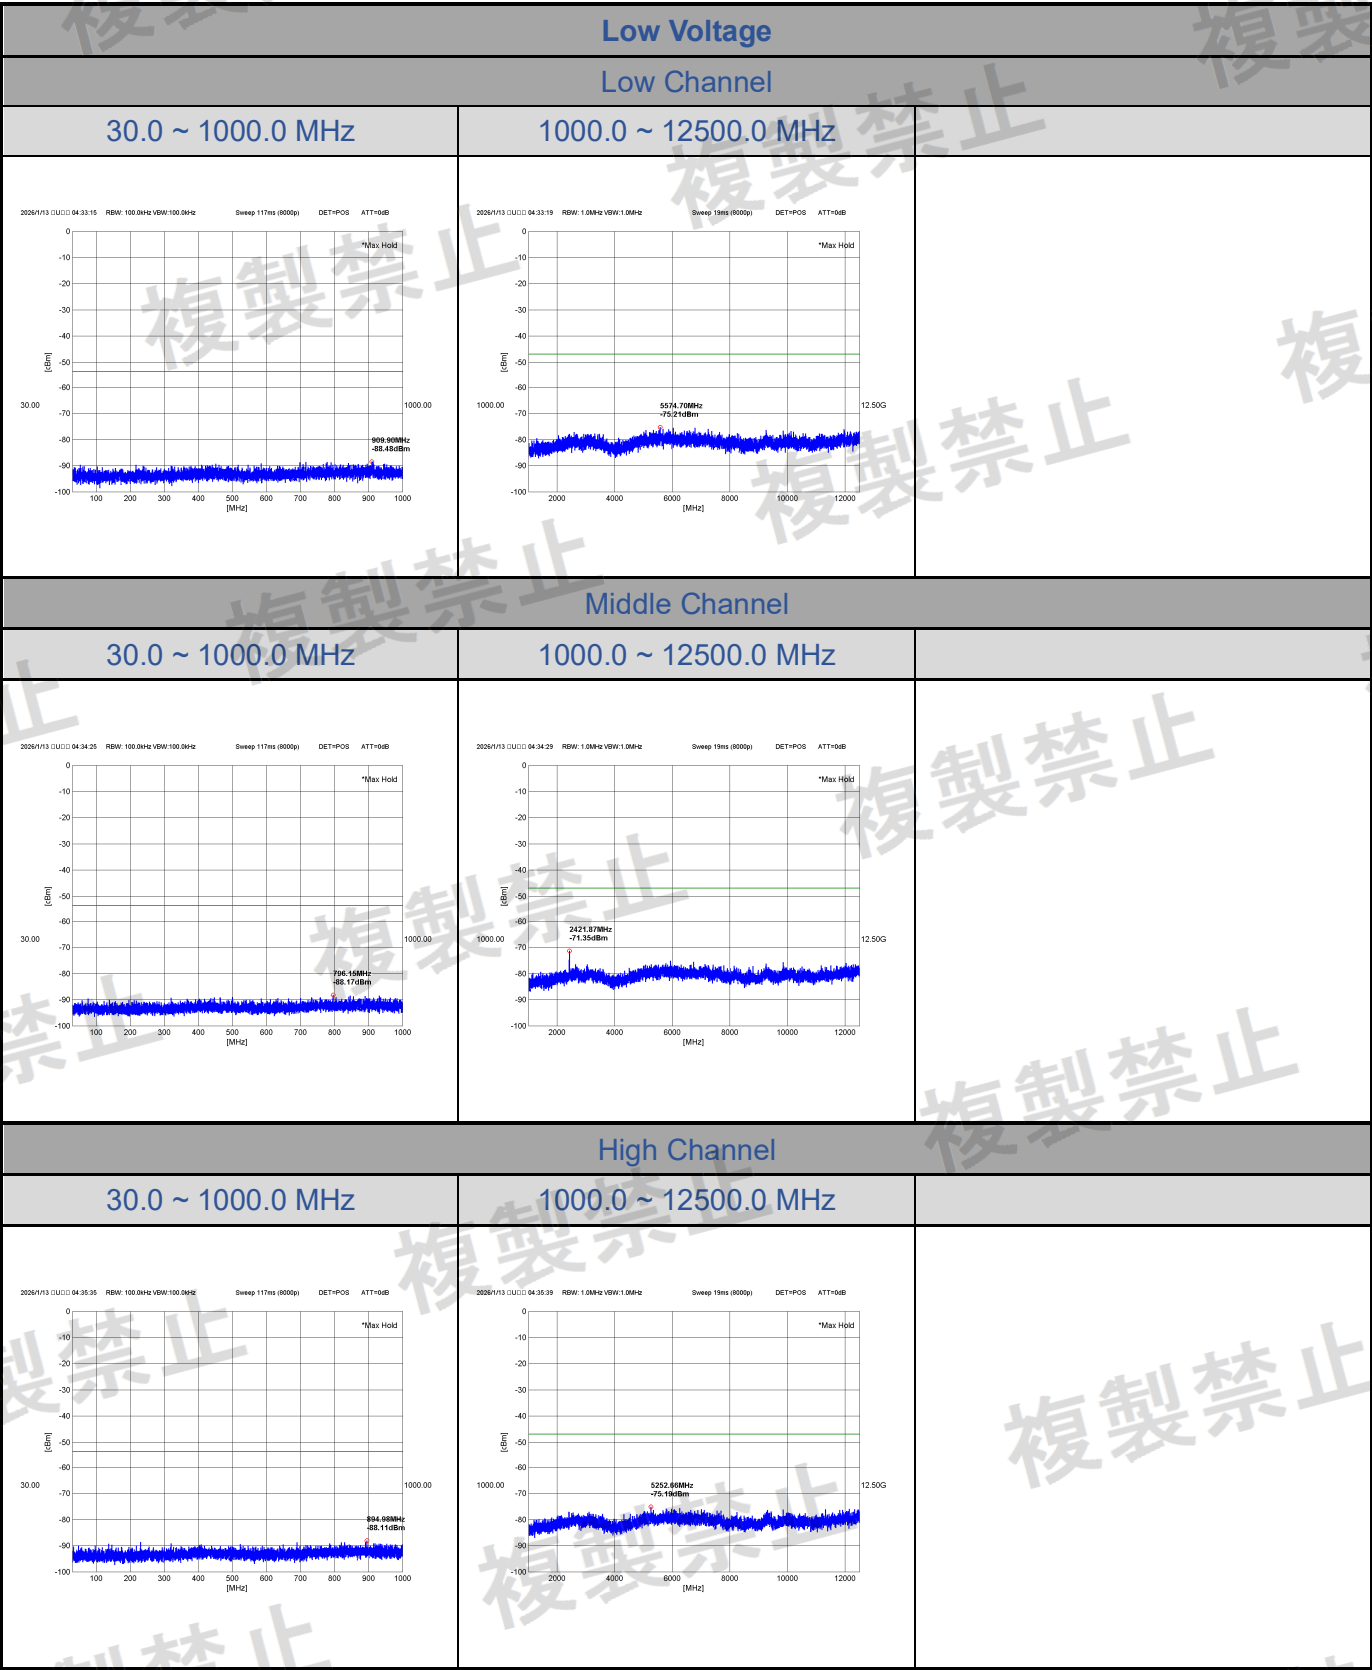


WiFi 2.4G Test Data

CN26VTXQ 001


802.11n HT20:2TX

<Chain 0>

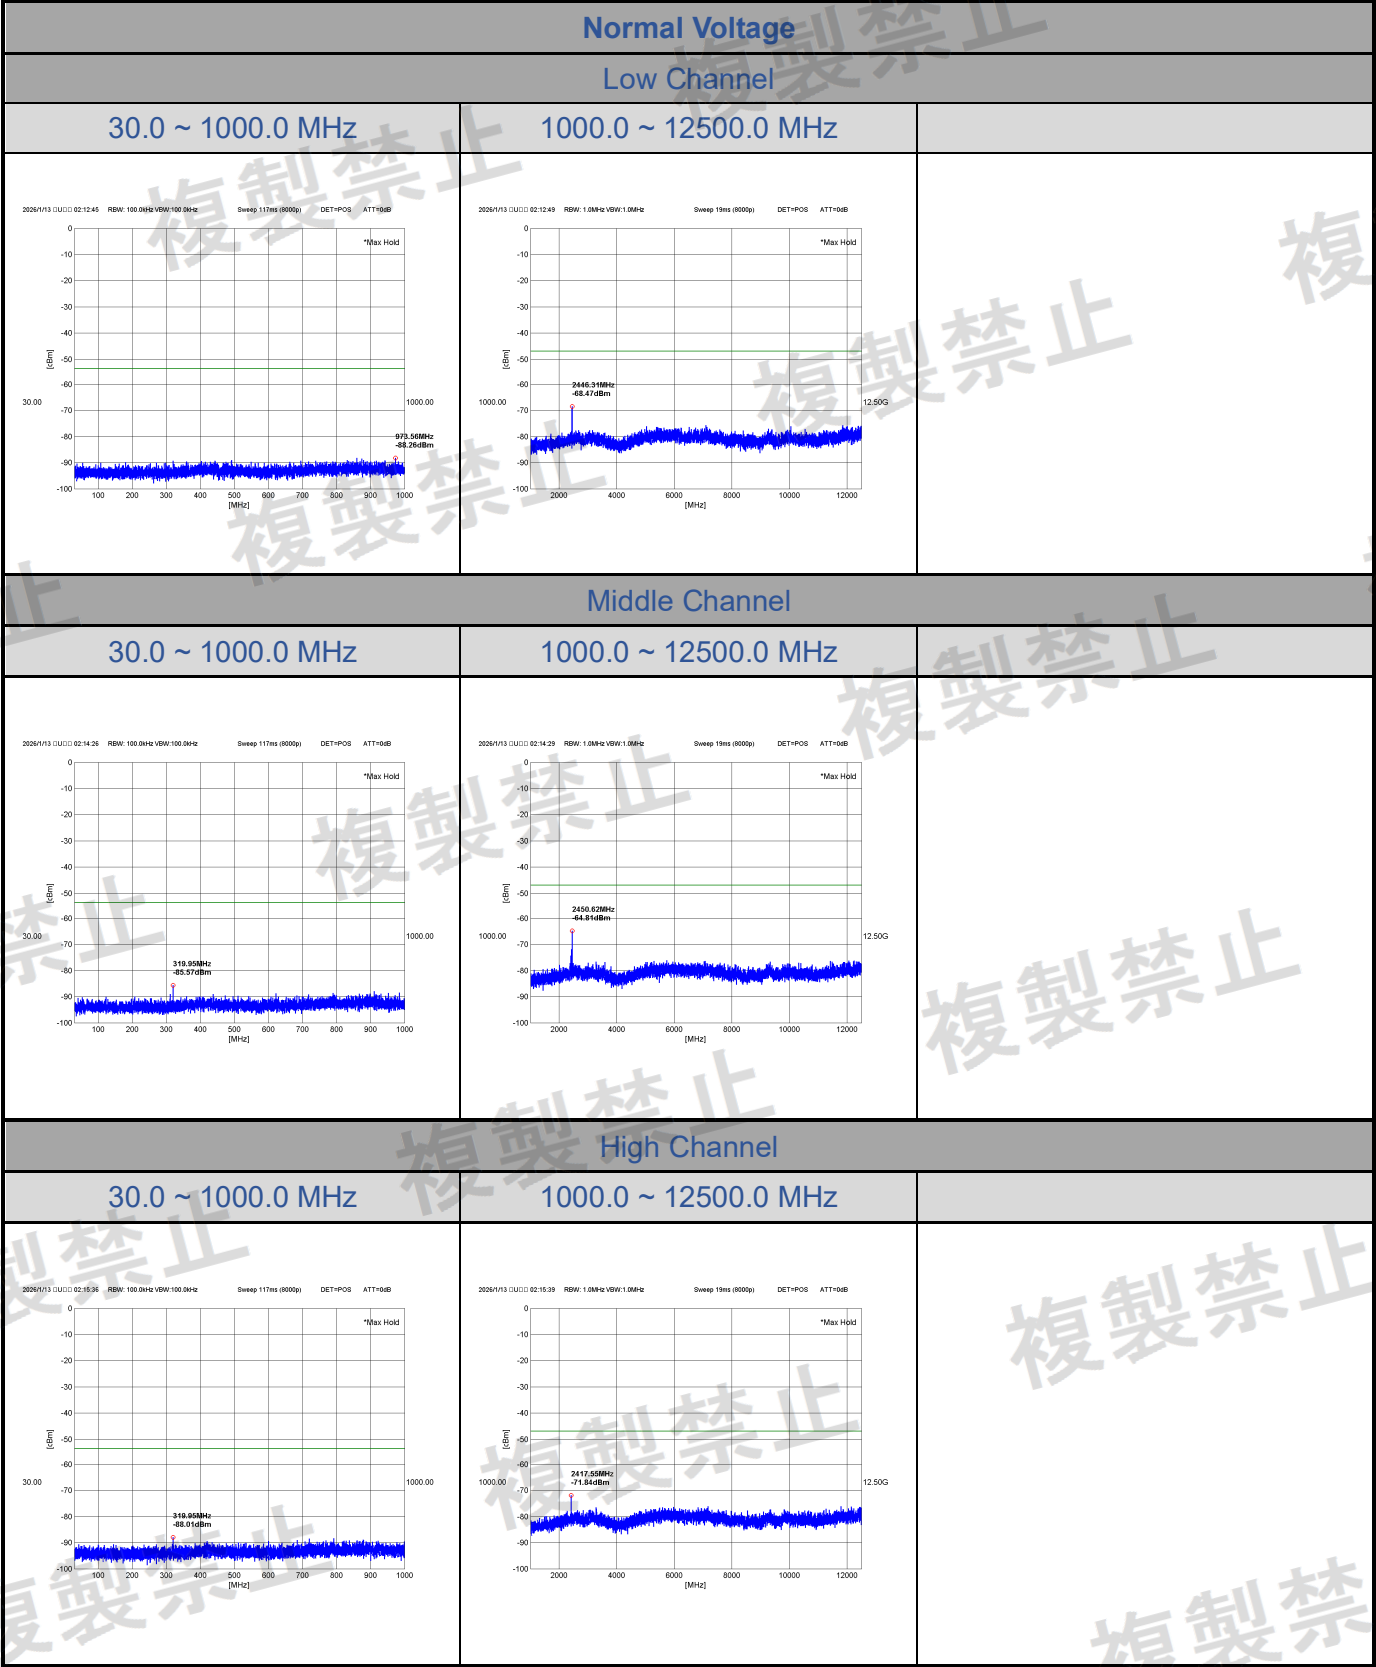


WiFi 2.4G Test Data

CN26VTXQ 001

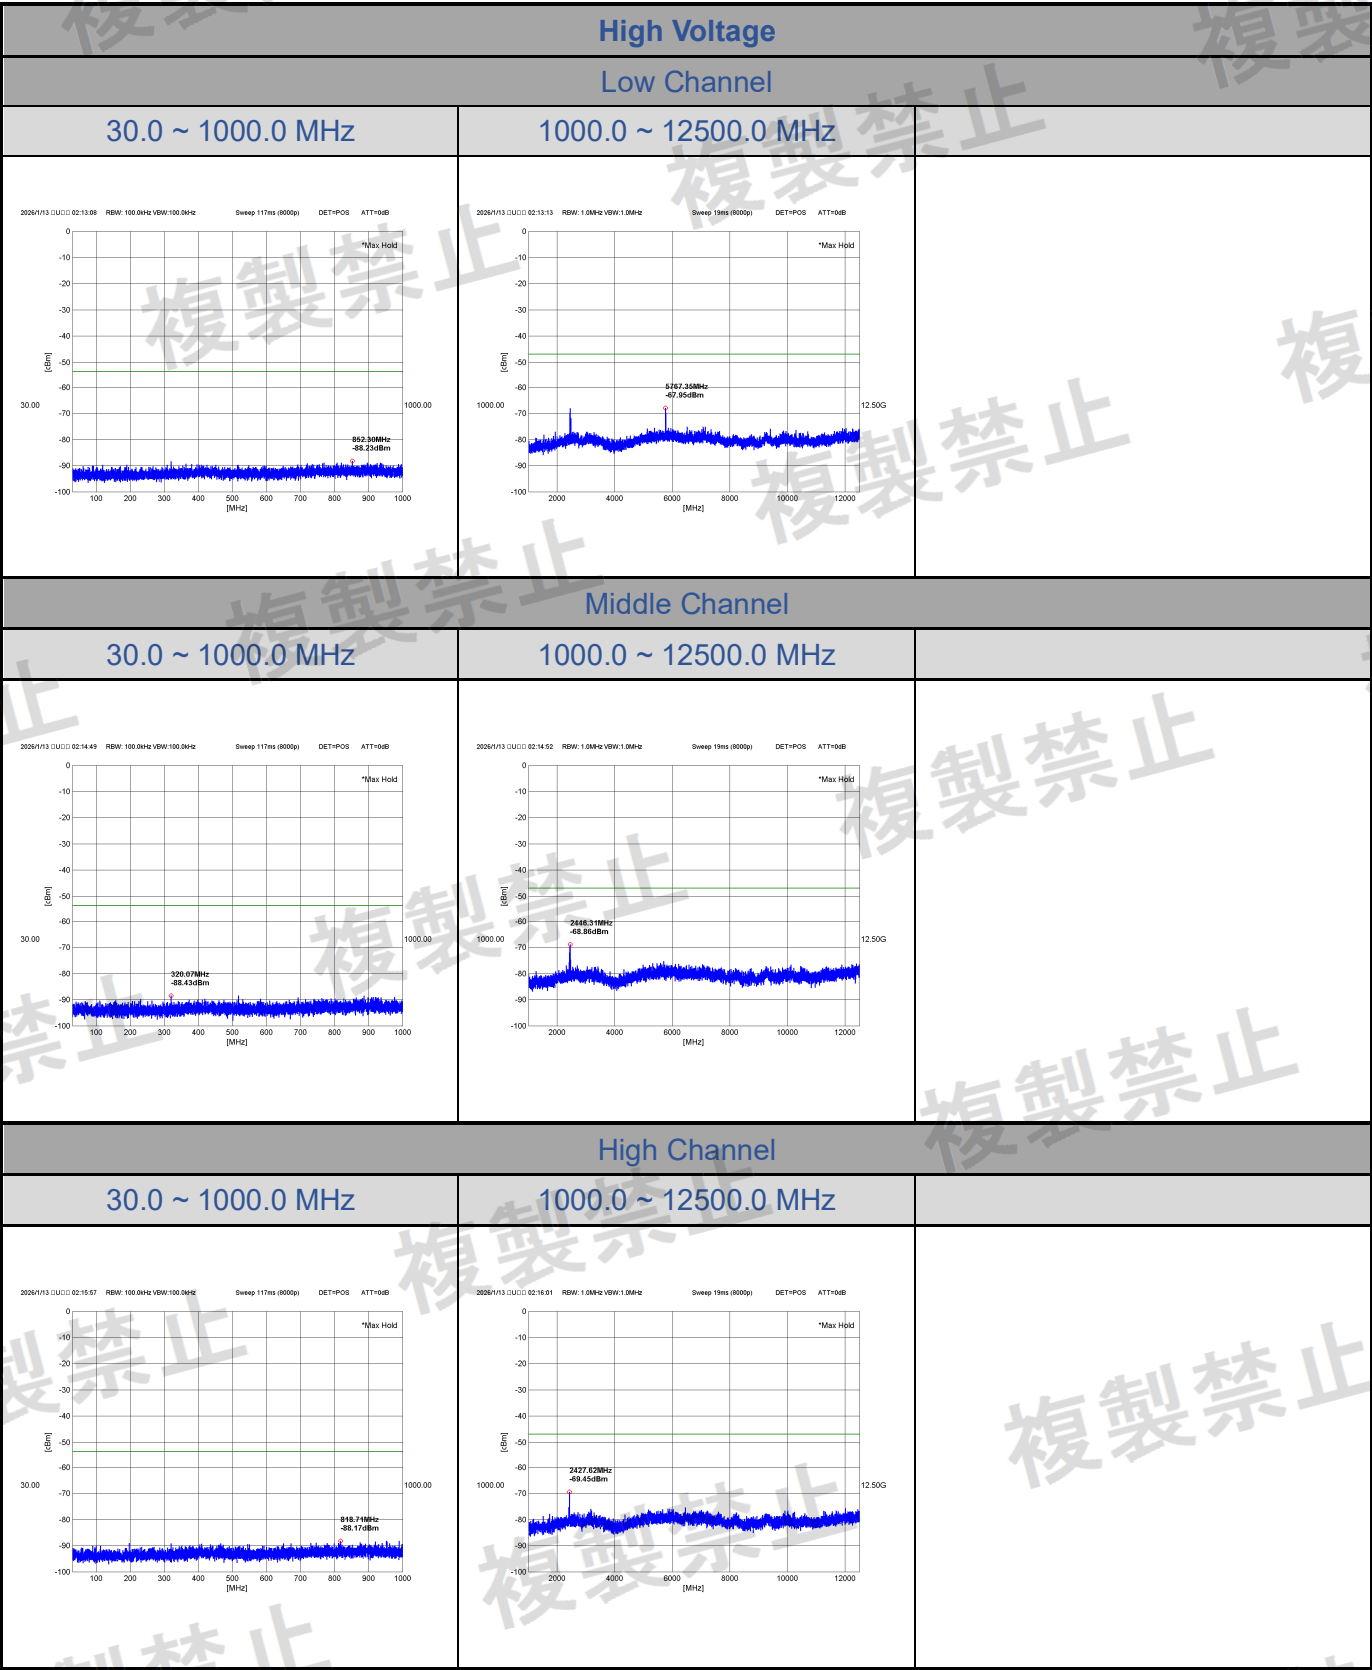

WiFi 2.4G Test Data

CN26VTXQ 001

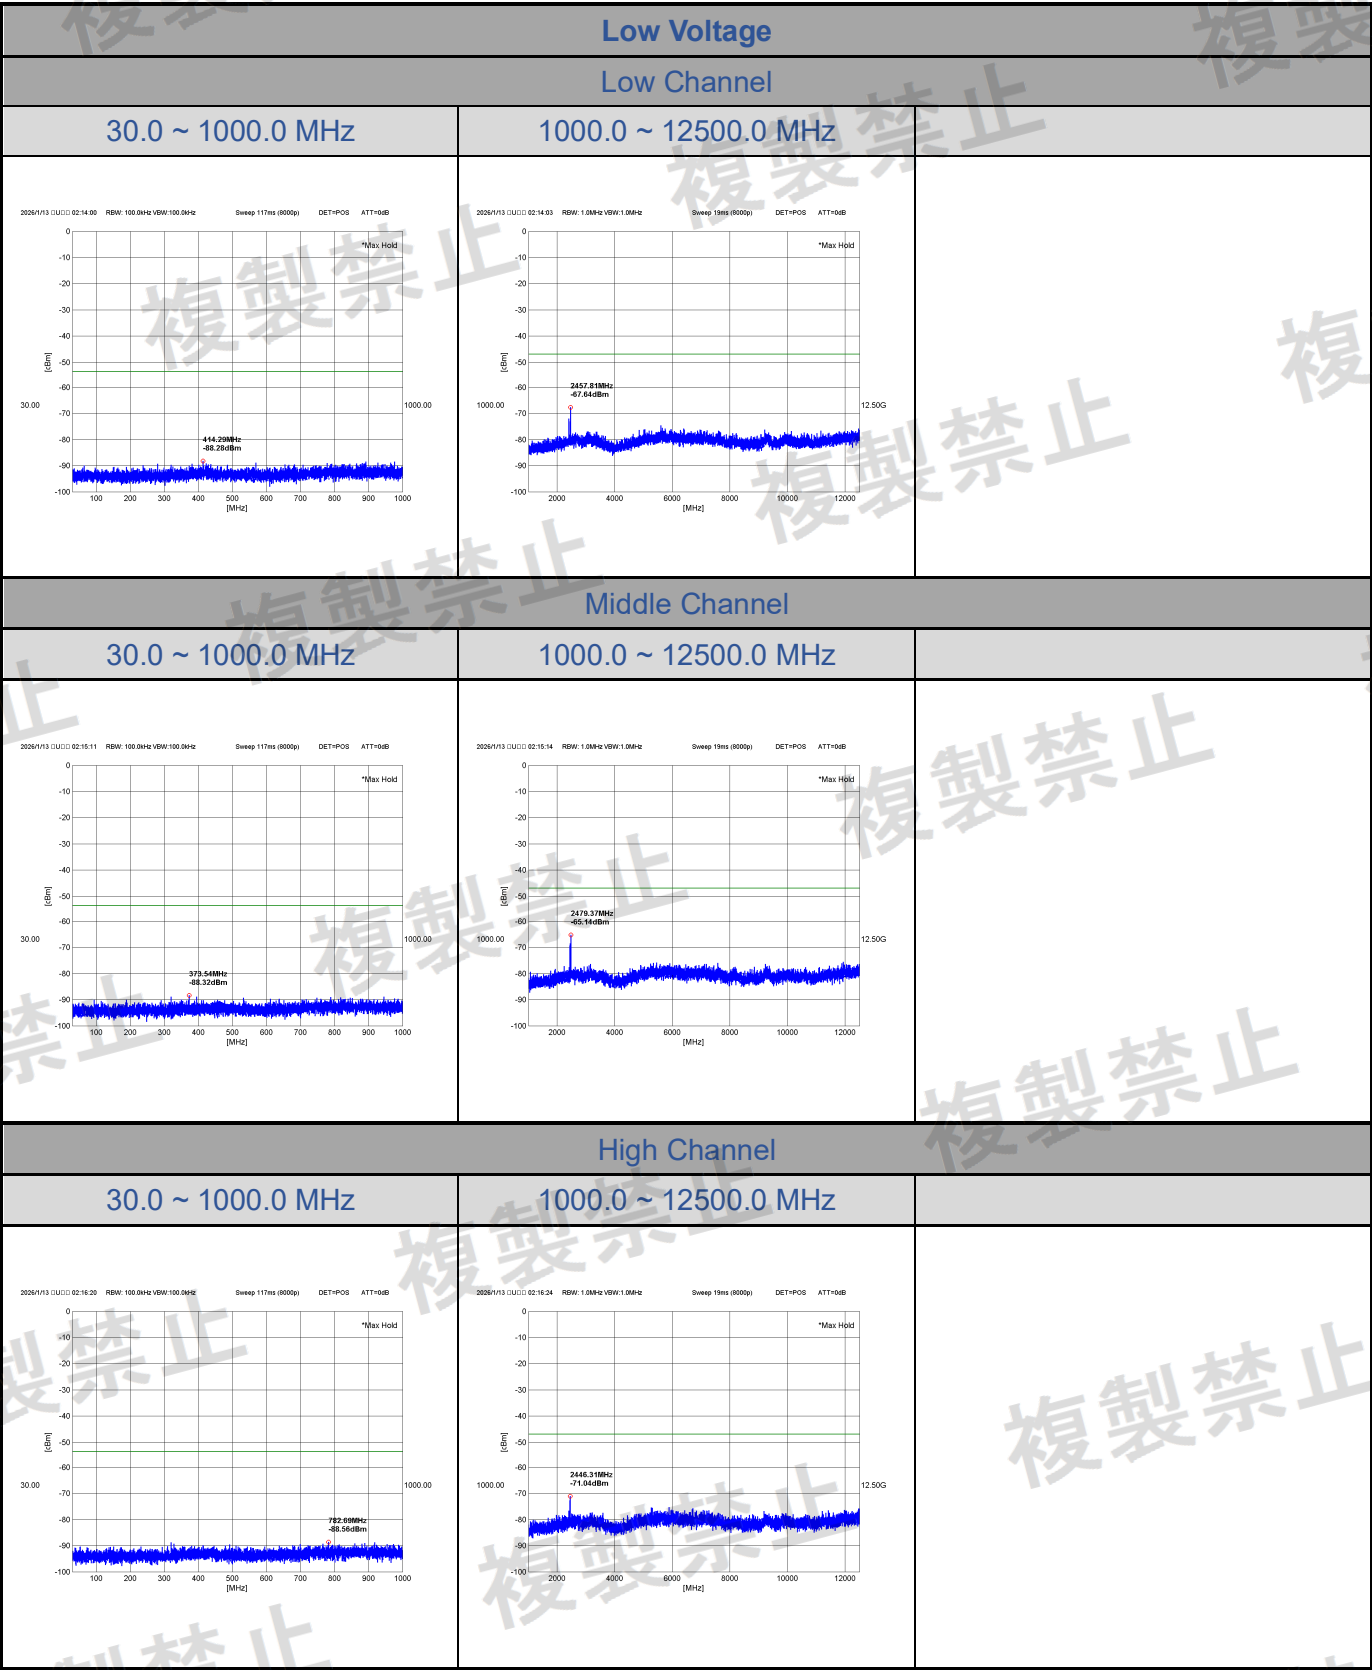


WiFi 2.4G Test Data

CN26VTXQ 001


802.11n HT20:2TX

<Chain 1>

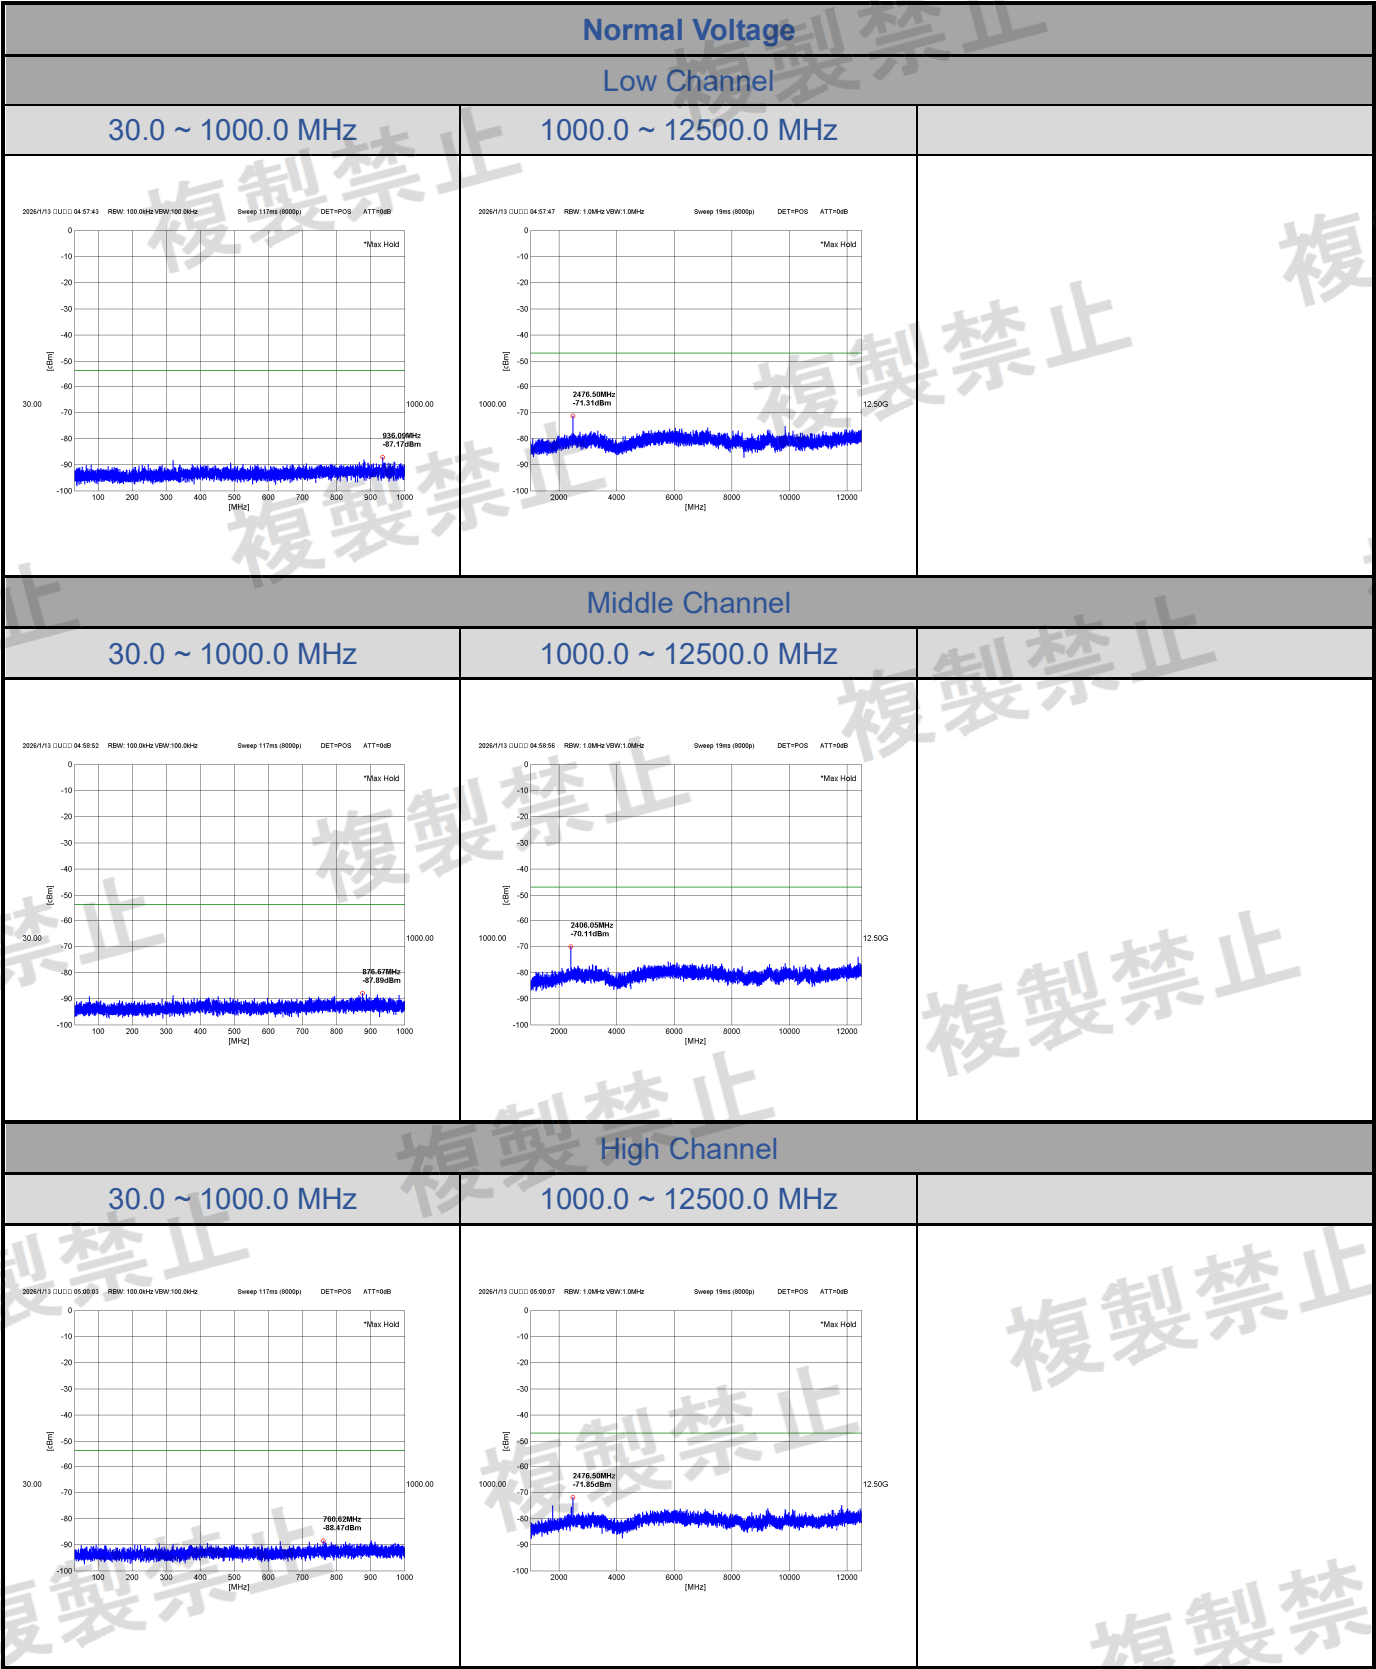


WiFi 2.4G Test Data

CN26VTXQ 001

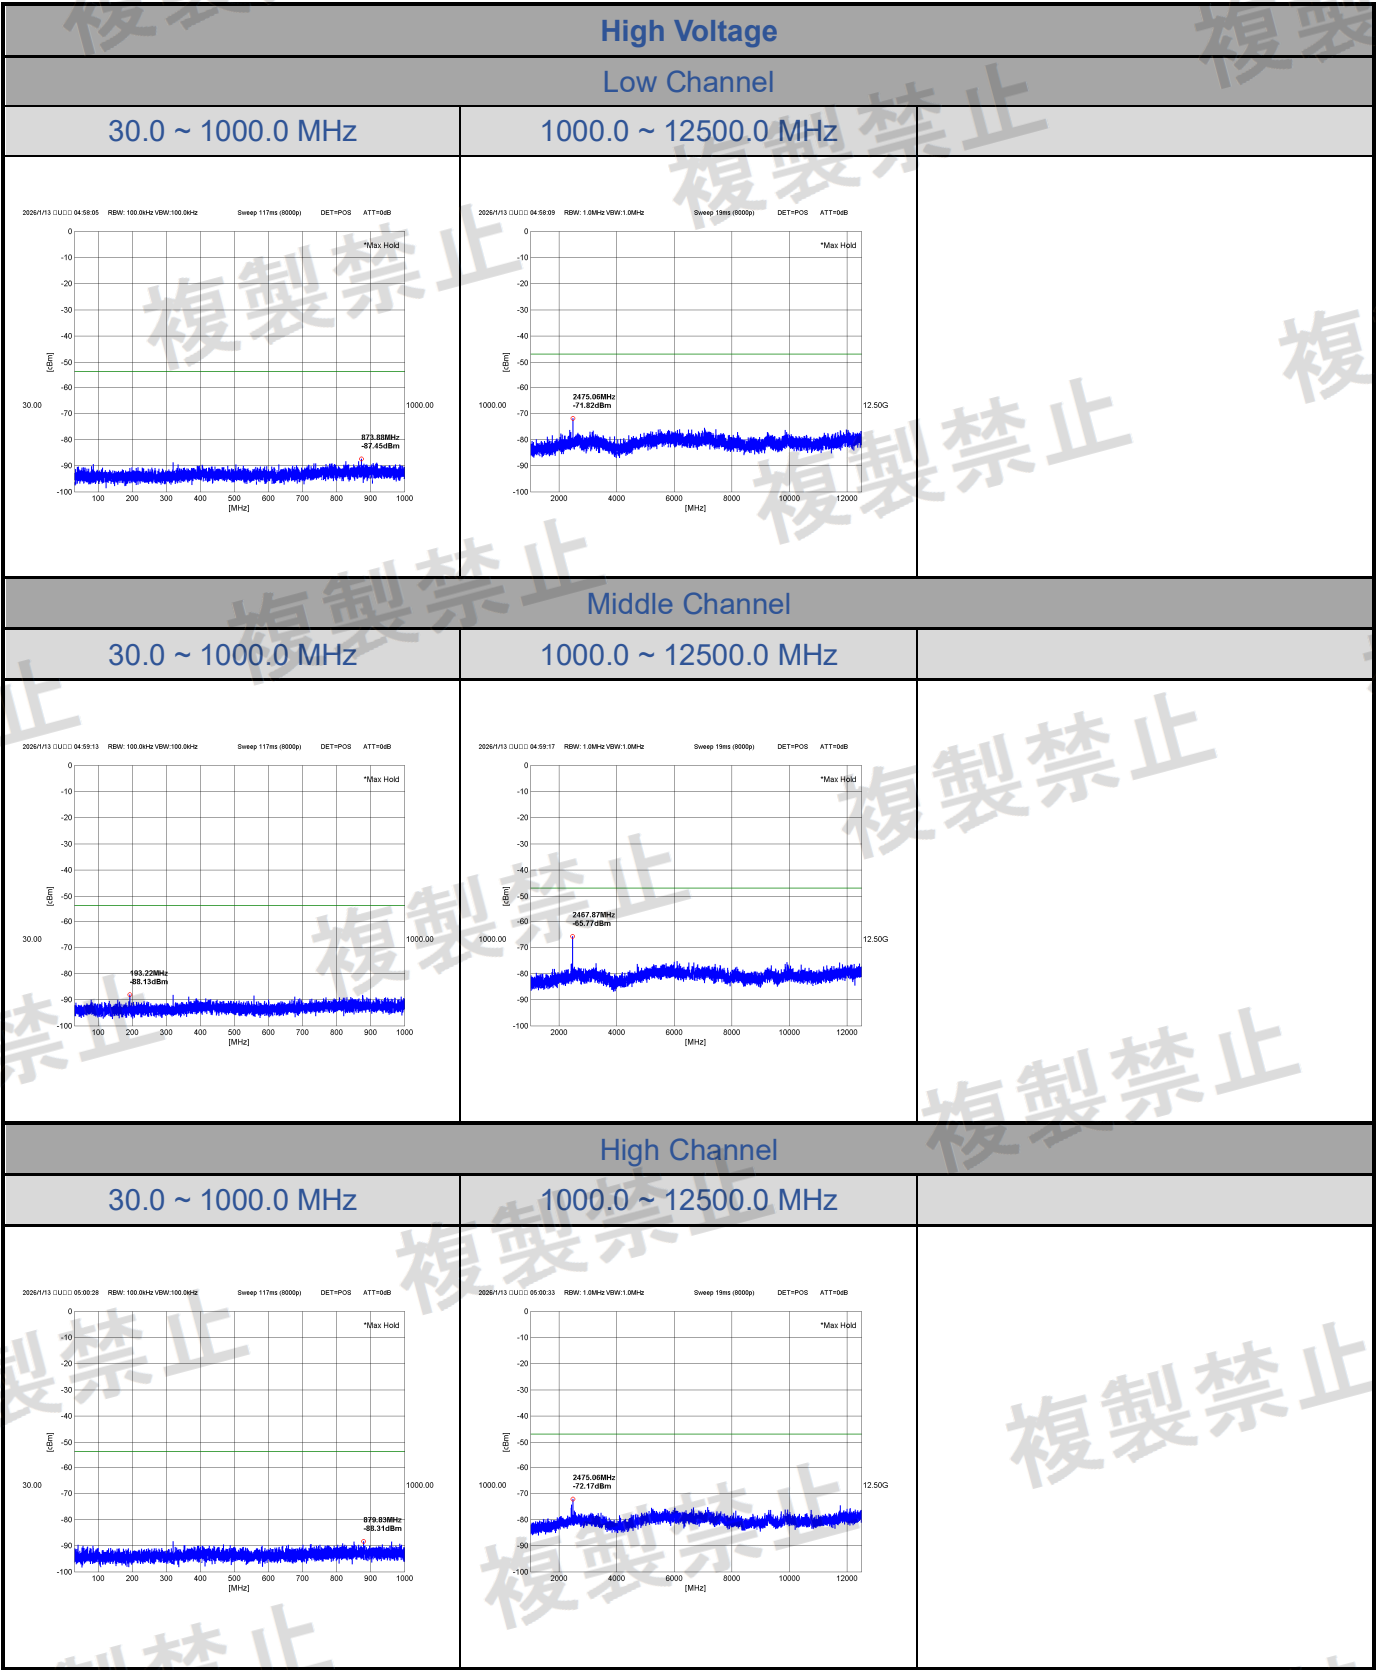

WiFi 2.4G Test Data

CN26VTXQ 001

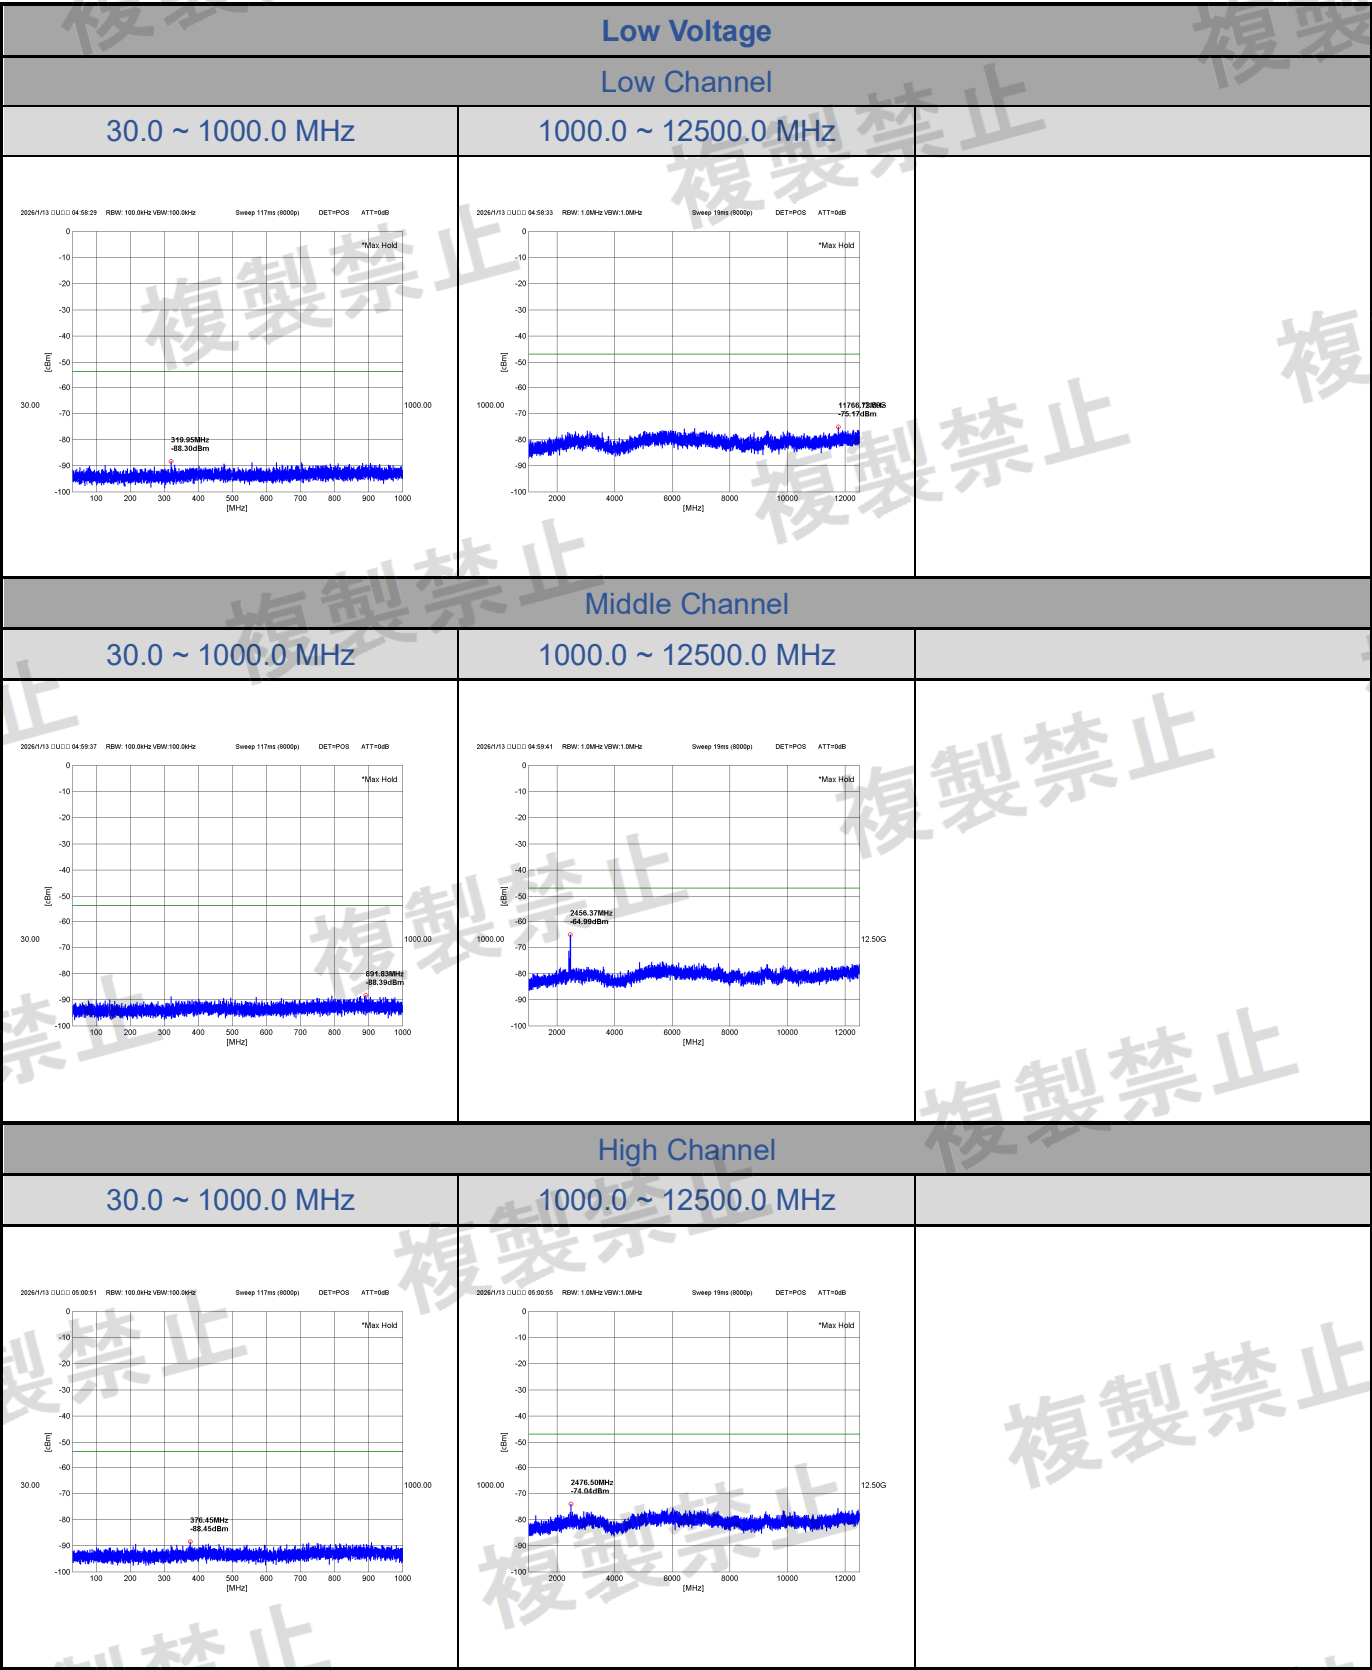


WiFi 2.4G Test Data

CN26VTXQ 001


802.11n HT40:2TX

<Chain 0>

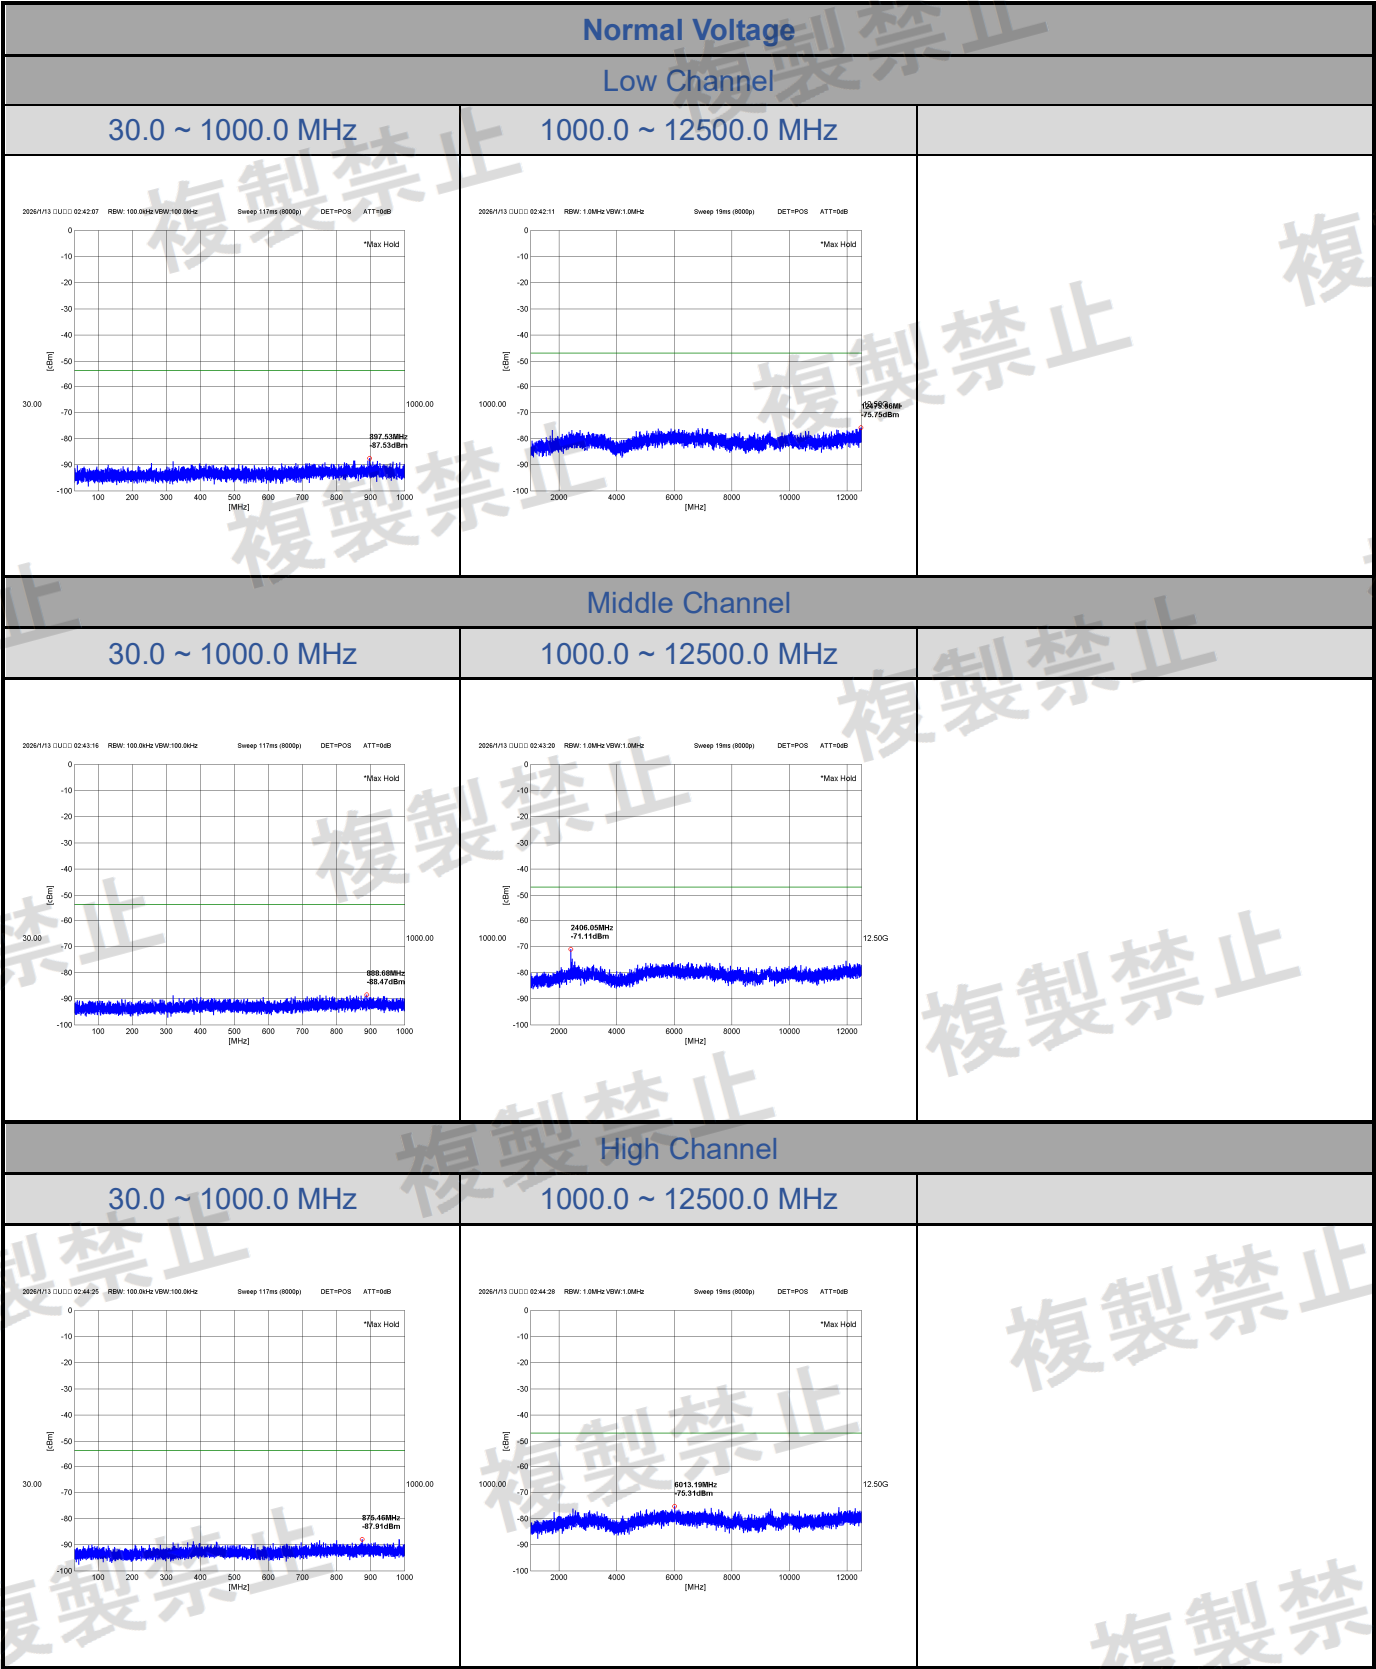


WiFi 2.4G Test Data

CN26VTXQ 001

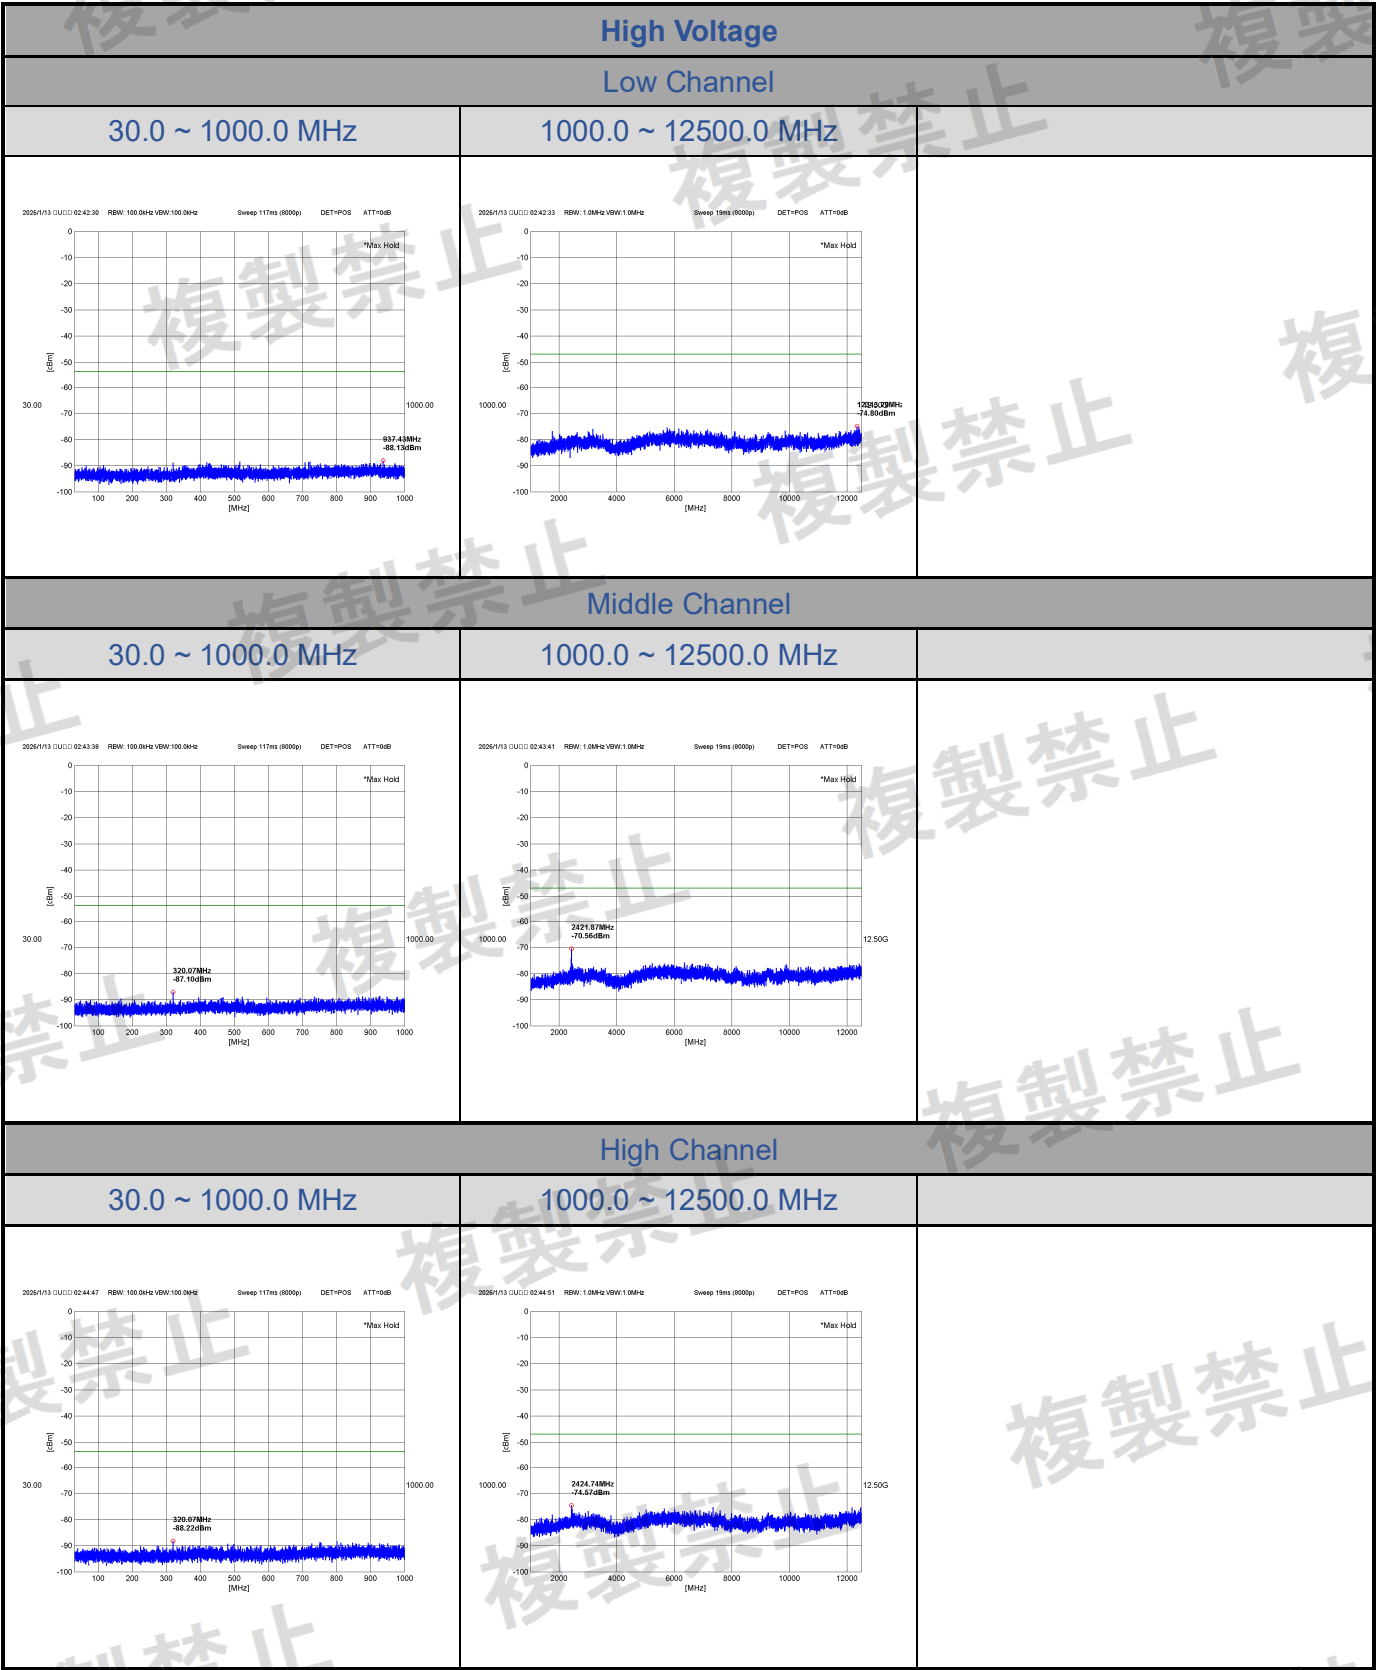

WiFi 2.4G Test Data

CN26VTXQ 001

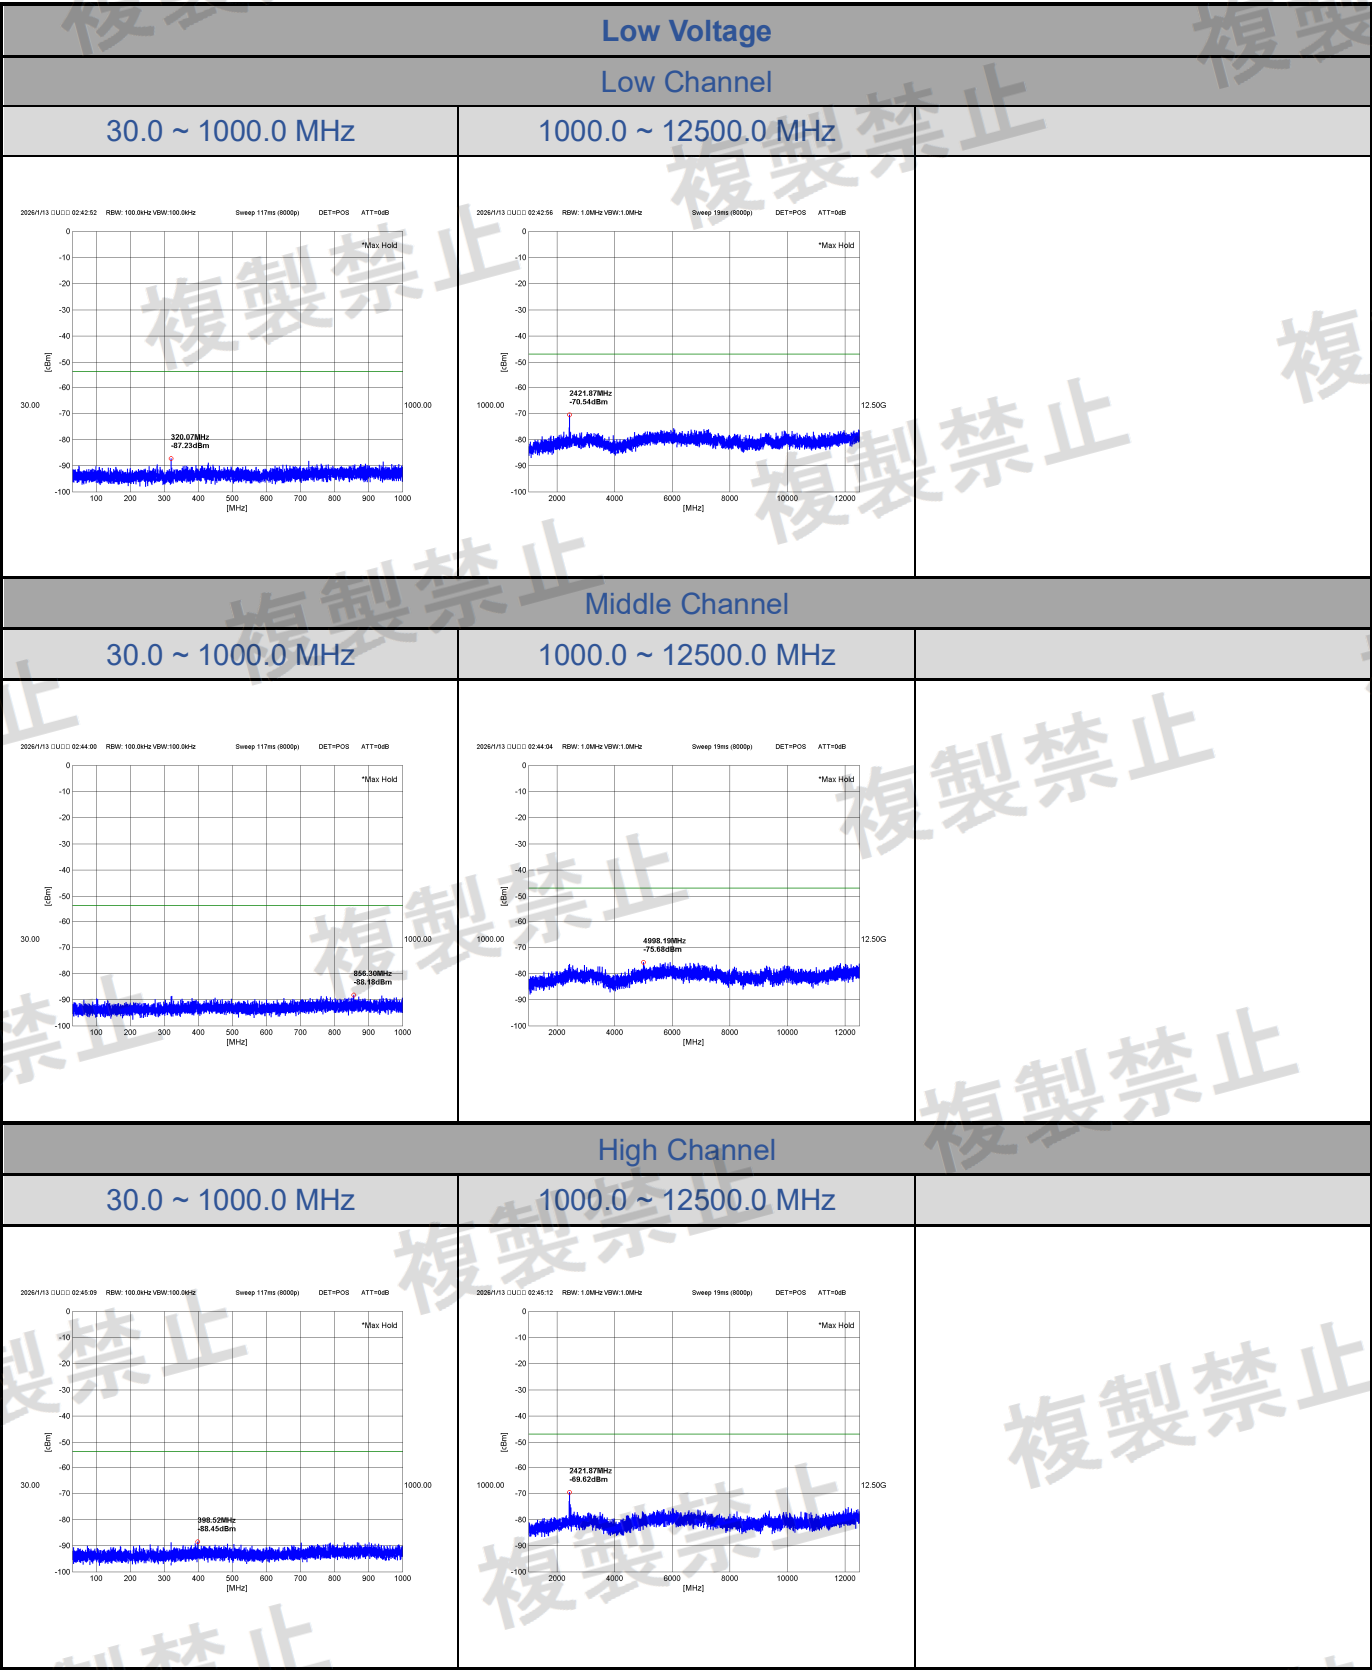


WiFi 2.4G Test Data

CN26VTXQ 001


802.11n HT40:2TX

<Chain 1>

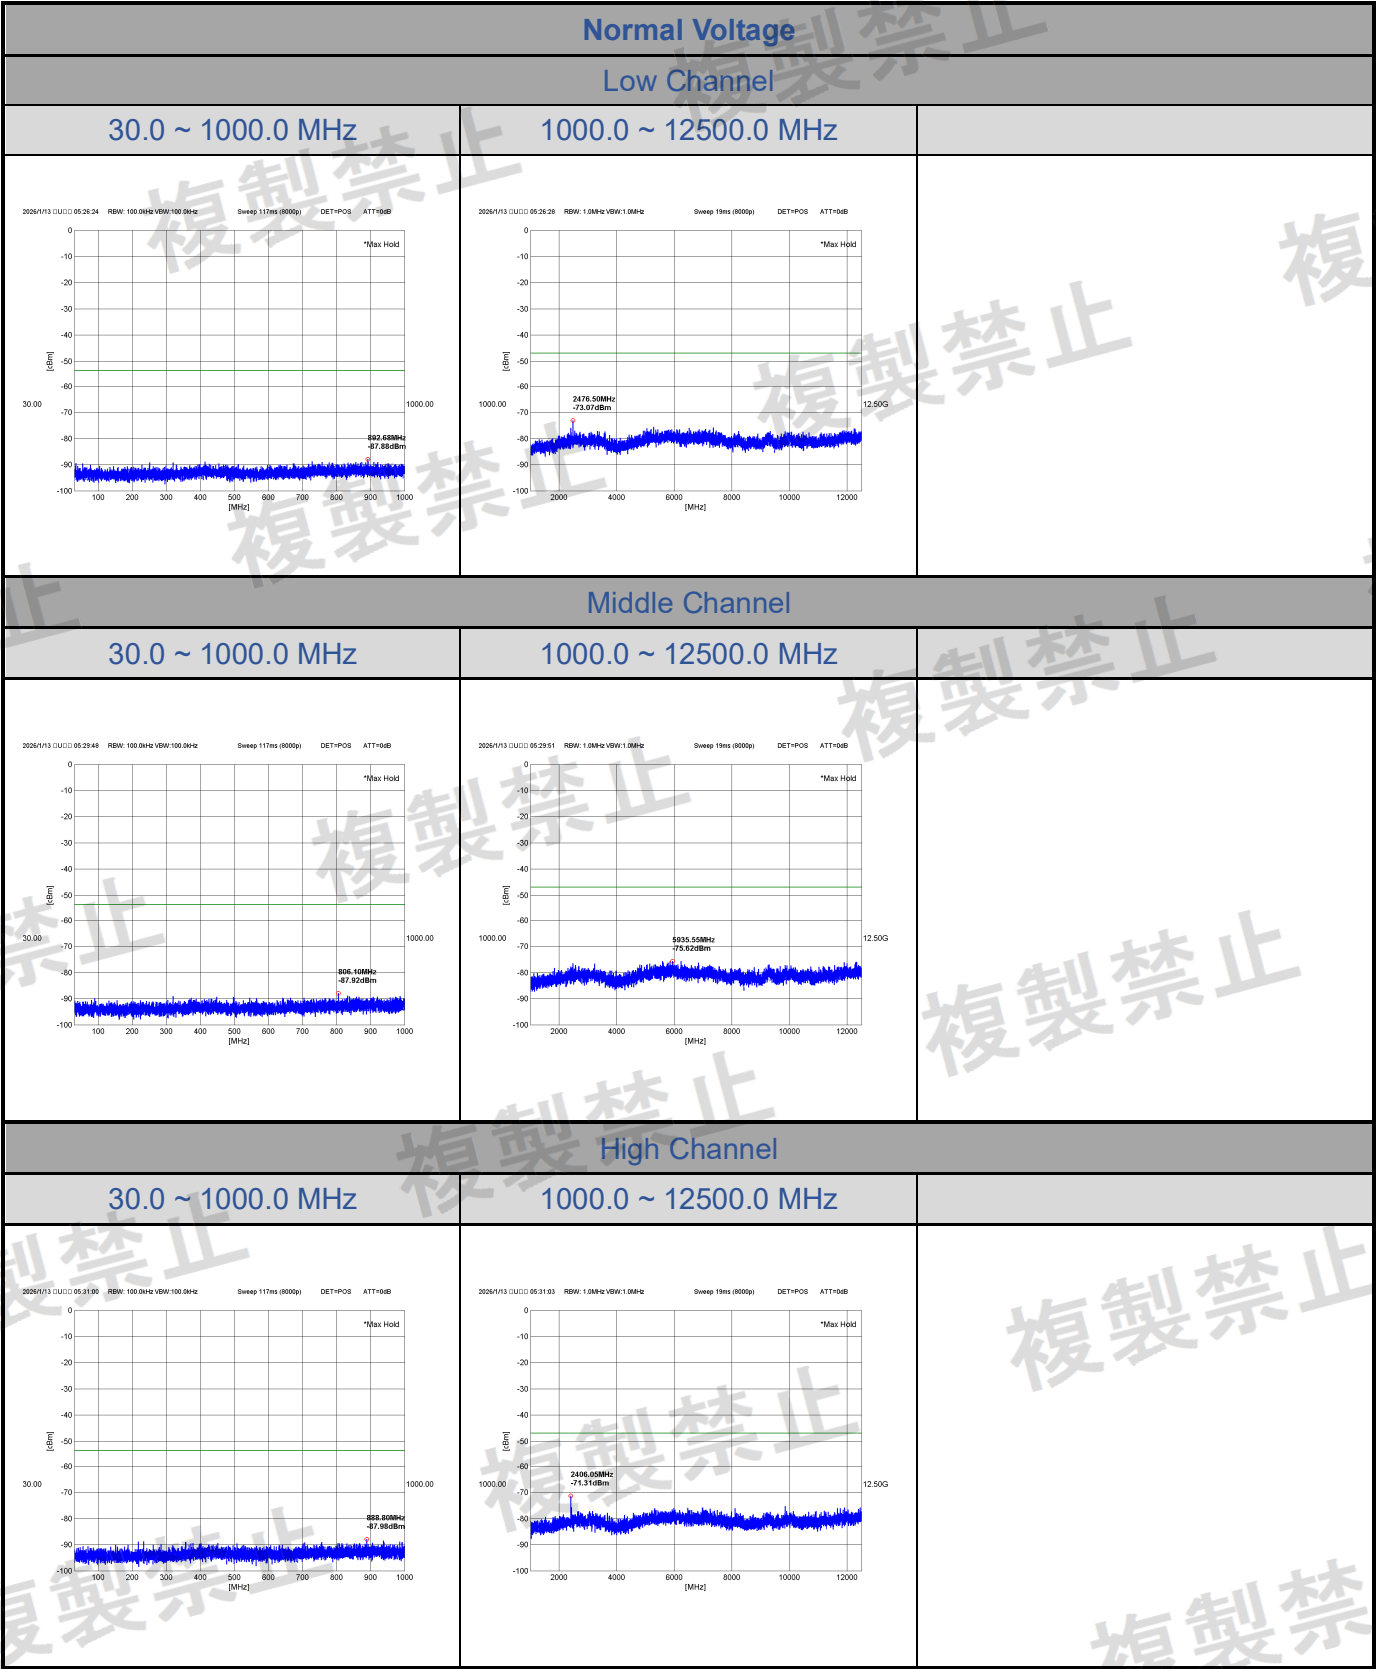

WiFi 2.4G Test Data

CN26VTXQ 001

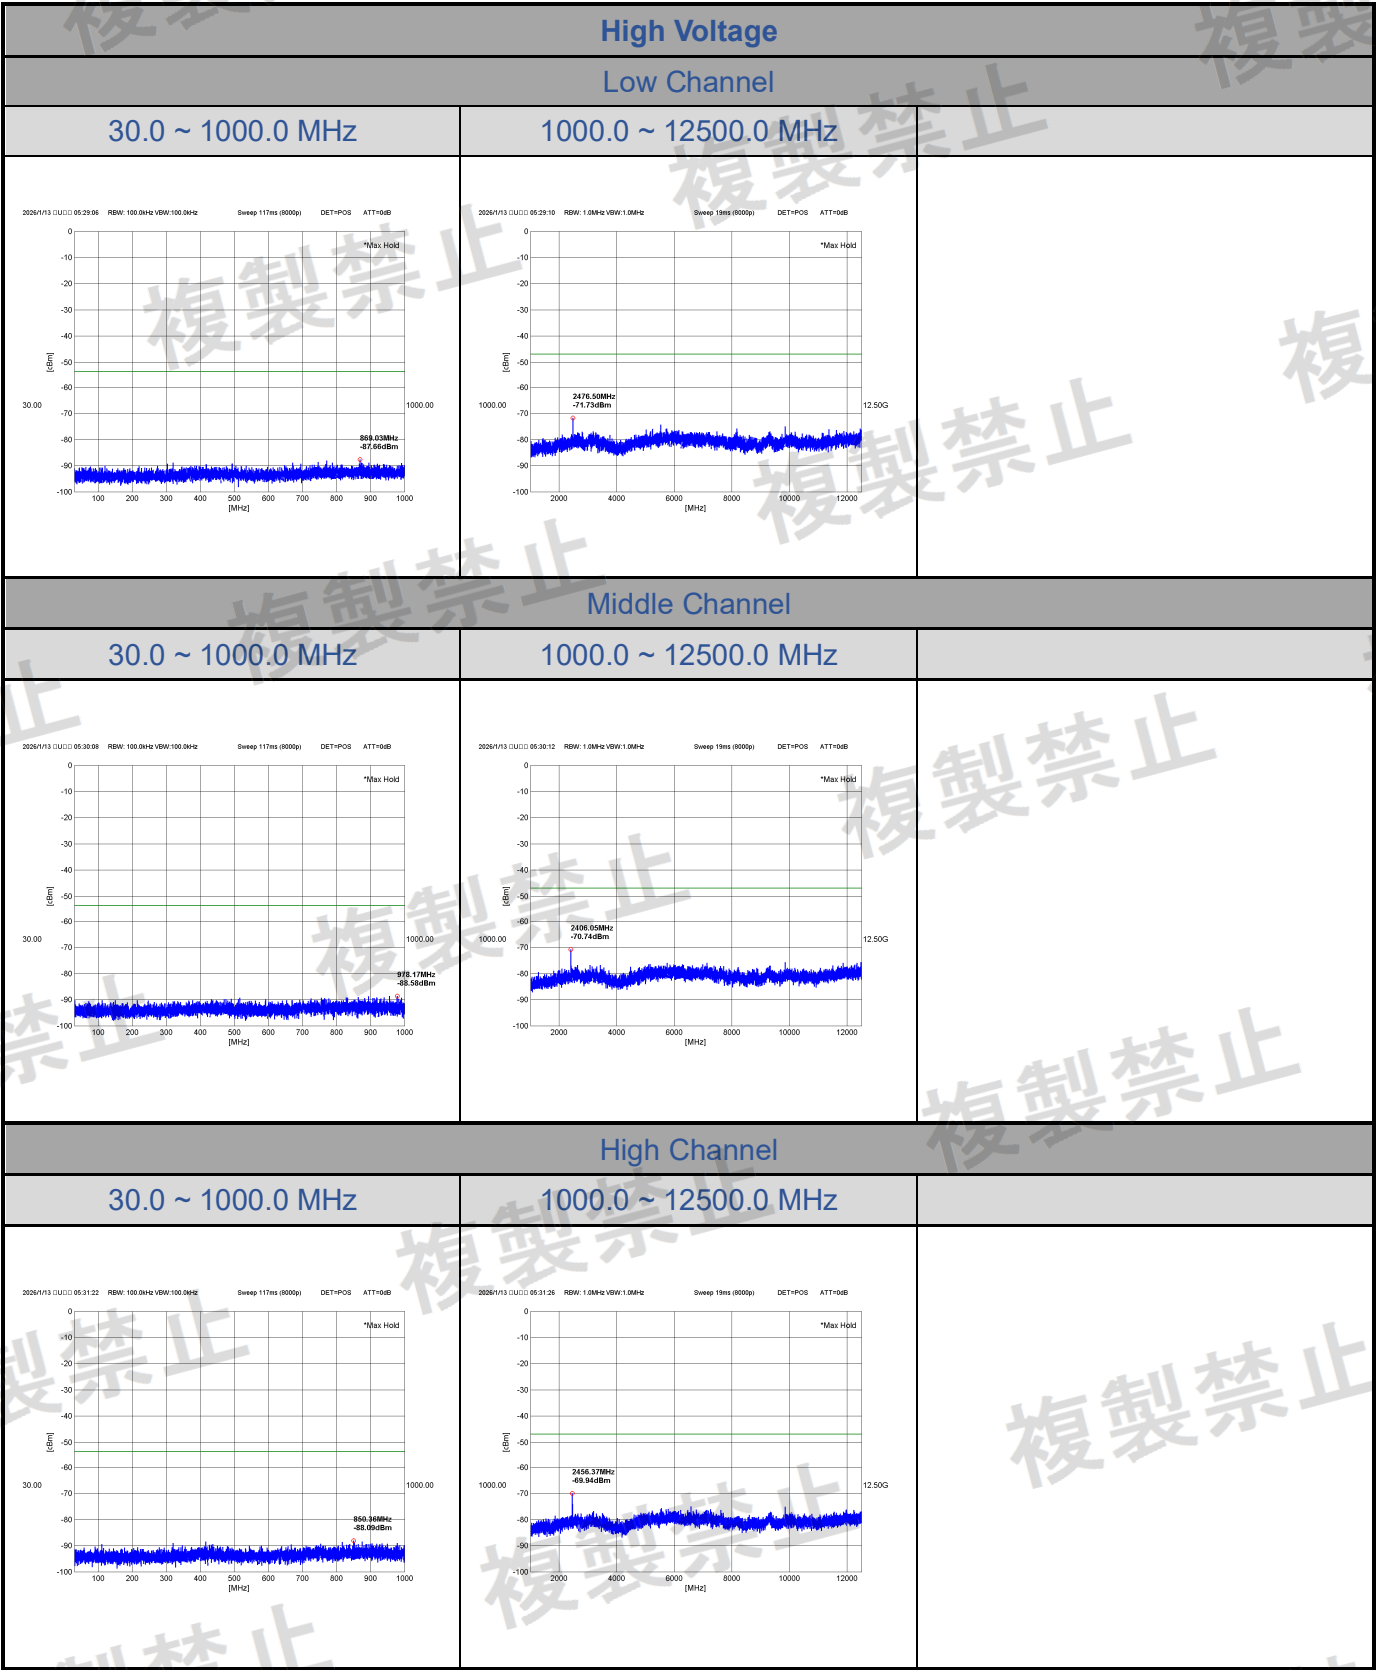

WiFi 2.4G Test Data

CN26VTXQ 001

