Website: www.cblueasia.com
Tel: +86-755-23059481
Email: marketing@cblueasia.com

TEST REPORT

Applicant	:	ONIX ELECTRONICS (UK) LIMITED
Address	:	No.10, Chiwan 1 Road, Shekou Nanshan District of Shenzhen City, China.
Product Name	:	Portable Music Player
Trade mark	:	ONIX
Model No.	:	XM2
Series model	:	Tocata
Report Number	:	BLA-RF-202512-A0201
Date of Issue	:	Dec. 30, 2025
Test standard	:	Item 19 of Article 2 Paragraph 1
Test result	:	PASS

Compiled by: Mark Chen **Review by:** Xavier **Approved by:** Blue Zheng

Issued Date: Dec. 30, 2025

BlueAsia Technical Services (Shenzhen) Co., Ltd BLA

BlueAsia Technical Services (Shenzhen) Co., Ltd

Address: No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

1 Version

Version No.	Date	Description
00	Dec. 30, 2025	Original

BlueAsia
複製禁止

2 Test Summary

Test	Test Requirement	Limit/Severity	Result
Antenna Requirement	Item 19 of Article 2 Paragraph 1	Notice 88 Appendix 43,B-1 (1)&(2)	PASS
Test frequency	Item 19 of Article 2 Paragraph 1	Notice 88 Appendix 43, A-3	PASS
Frequency Error	Item 19 of Article 2 Paragraph 1	±50 PPM or less	PASS
Occupied Bandwidth	Item 19 of Article 2 Paragraph 1	83.5 MHz or less	PASS
Spread-spectrum Bandwidth	Item 19 of Article 2 Paragraph 1	N/A	N/A
Spread Factor	Item 19 of Article 2 Paragraph 1	N/A	N/A
Antenna Power	Item 19 of Article 2 Paragraph 1	Designated value: (1)FH, FH+DS , FH+OFDM 3mW/MHz (Used in the range of 2400~2483.5MHz) (2) OFDM , DS other than (1) : 10mW/MHz (3) Other than (1) & (2) 10mW Tolerance: +20%	PASS
Transmission Antenna Gain (EIRP Antenna Power)	Item 19 of Article 2 Paragraph 1		PASS
Transmission Radiation Angle Width (3dB beam-width)	Item 19 of Article 2 Paragraph 1		Note1
Spurious Emission of Tx	Item 19 of Article 2 Paragraph 1	(1) Below 2387 MHz : -26dBm/MHz (2) 2387 to 2400 MHz : -16dBm/MHz (3) 2483.5 through 2496.5 MHz : -16dBm/MHz (4) Over 2496.5 MHz : -26dBm/MHz	PASS
Dwell Time	Item 19 of Article 2 Paragraph 1	less than 0.4sec	PASS
Pseudorandom Frequency Hopping Sequence	Item 19 of Article 2 Paragraph 1	Notice 88 Appendix 43	PASS
Interference prevention capability	Item 19 of Article 2 Paragraph 1	Notice 88 Appendix 43	PASS
RF accessibility	Item 19 of Article 2 Paragraph 1	Notice 88 Appendix 43	PASS
Spurious Emission of Rx	Item 19 of Article 2 Paragraph 1	(1) Below 1 GHz: -54dBm (2) 1GHz or higher: -47dBm	PASS

Remark:
Model No.: XM2, Tocata
Only the model XM2 was tested, the above models are exactly the same in terms of PCB layout, internal structure and components, except for the difference in model names; Tocata is the sales model no., while XM2 is the model no. of the machine itself.
EUT: In this whole report EUT means Equipment Under Test.
Tx:In this whole report Tx (or tx) means the product in transmitting status.
Rx: In this whole report Rx (or rx) means the product in receiving status.
RF:In this whole report RF means Radiated Frequency.
Note1: The max EIRP power is less than 6.91dBm/MHz, this test is not applicable.

3 Contents

1 Version 2
2 Test Summary 3
3 Contents 4
4 General Information 5
4.1 Client Information 5
4.2 General Description of EUT 5
4.3 Description of Support Units 6
4.4 Test Location 6
5 Equipment List 7
6 Radio Technical Requirements Specification 8
6.1 Transmitter Requirements 10
6.1.1 EUT test voltage and Frequency 10
6.1.2 Antenna Requirement 12
6.1.3 Frequency Error 13
6.1.4 Occupied Bandwidth (99%) 16
6.1.5 Spread spectrum Bandwidth (90%) 19
6.1.6 Antenna Power 22
6.1.7 Spurious Emissions of Tx 24
6.1.8 Dwell Time 39
6.1.9 Pseudorandom Frequency Hopping Sequence 42
6.1.10 Interference prevention function 43
6.1.11 RF accessibility 44
6.2 Receiver Requirements 45
6.2.1 Spurious Emissions of Rx 45
7 Test setup photo 53
8 Photographs 54
8.1 EUT Constructional Details 54

BlueAsia

4 General Information

4.1 Client Information

Applicant:	ONIX ELECTRONICS (UK) LIMITED
Address of Applicant:	No.10, Chiwan 1 Road, Shekou Nanshan District of Shenzhen City, China.
Manufacturer:	ONIX ELECTRONICS (UK) LIMITED
Address of Manufacturer:	No.10, Chiwan 1 Road, Shekou Nanshan District of Shenzhen City, China.
Factory:	ONIX ELECTRONICS (UK) LIMITED
Address of Factory:	No.10, Chiwan 1 Road, Shekou Nanshan District of Shenzhen City, China.

4.2 General Description of EUT

Product Name:	Portable Music Player
Model No.:	XM2
Series model:	Tocata
Operating Frequency:	2402 MHz to 2480 MHz
Conducted rated power:	F1D: 0.50mW/MHz G1D: 0.50mW/MHz
Number of Channels:	79 Channels
Type of Modulation:	GFSK, (π/4)DQPSK, 8DPSK
Channel Separation:	1 MHz
Antenna Type:	FPC antenna
Antenna gain:	-0.1dBi (Provided by customer)
Power supply:	Battery DC 3.85V
Test Voltage:	DC 3.85V
Hardware Version:	V2
Software Version:	V1.0
Sample Received Date:	Dec. 01, 2025
Sample tested Date:	Dec. 01, 2025 to Dec. 18, 2025

BlueAsia
複製禁止

4.3 Description of Support Units

Device Type	Manufacturer	Model Name	Serial No.	Remark
Test board	DevEBox	CH340G	/	/

4.4 Test Location

All tests were performed at:
BlueAsia Technical Services (Shenzhen) Co.,Ltd.
No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

CNAS —Designation No.: L9788
BlueAsia Technical Services(Shenzhen) Co., Ltd is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L9788.

BlueAsia
複製禁止

5 Equipment List

Equipment	Manufacturer	Model	Serial No.	Cal Date	Due Date	Calibration body	Classification
Communication test set test set	Anritsu	MT8852B	06262047872	2025/8/6	2026/8/5	GRGT	(c)
Spectrum Analyzer	Keysight	N9030A	MY52350152	2025/8/6	2026/8/5	GRGT	(c)
Signal Generator	Agilent	E4438C	MY45092582	2025/8/6	2026/8/5	GRGT	(c)
Power sensor	DARE	RPR3006W	14I00889SN042	2025/8/6	2026/8/5	GRGT	(c)

Remark:

(a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) in Japan (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1) in JRL.

(b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No. 51 of 1992) .

(c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).

(d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the right column of appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to （C）

From JRL Article 24-2, paragraph 4, Item 2

Notice: Calibration duration for above equipments is 1 year.

BlueAsia

6 Radio Technical Requirements Specification

Table 1: Radio Technical Requirements Specification for 2.4 GHz band wide-band low-power data communication system (Item 19 of Article 2 Paragraph 1)

Items	Technical standard
Assigned frequency or designated frequency	2400-2483.5MHz
Communication method	One-way communication, simplex, semi-duplex, or duplex operation of digital signal transmission including spread spectrum
Tolerance of frequency ($\times 10^{-6}$)	±50PPM
Tolerance of occupied bandwidth	FH: 83.5MHz or less FH + DS: 83.5MHz or less FH + OFDM: 83.5MHz or less OFDM: 38MHz or less Others: 26MHz or less
Antenna power	Designated value (1) FH, FH+DS , FH+OFDM：3mW/MHz (used in the range of 2400~2483.5 MHz) (2) OFDM , DS other than (1)：10mW/MHz (3) Other than (1) & (2)：10mW Tolerance ：+20%
Antenna gain	1) 12.14 dBi or less in principle 2) In case of directional antenna (1) FH, FH+DS or FH+OFDM using 2400~2483.5 MHz EIRP≤ 16.91 dBm/MHz (2) OFDM or DS other than (1) EIRP≤ 22.14 dBm/MHz (3) Other than (1) and (2): 22.14 dBm or less (4) OFDM OBW 26 - 38MHz: 19.14dBm/MHz (5) Half-power angle of directional antenna (e) in case of the item 2):e≤ 360/A (The A is 10 in maximum.)
Tolerance of spurious emission intensity	(1) Below 2387 MHz: 2.5μW/MHz (2) 2387 to 2400 MHz: 25μW/MHz (3) 2483.5 through 2496.5 MHz: 25μW/MHz (4) Over 2496.5 MHz: 2.5μW/MHz
Spreading bandwidth	N/A
Spreading factor	N/A
Limit of secondary radiated emissions	(1) Below 1 GHz: 4nW (2) 1 GHz or higher: 20nW
Dwell Time	Calculated method: Dwell time= 0.4s *Spreading Rate *one brurst time* number of transmission (1s) Note: * Spreading rate = [Spread bandwidth (actual measurement value)] / [Transmission rate] Number of transmission (1s) of DH1/2DH1/3DH1=1600/(2*79) Number of transmission (1s) of DH3/2DH3/3DH3=1600/(4*79) Number of transmission (1s) of DH5/2DH5/3DH5=1600/(6*79)
Interference prevention function	Shall have the function of automatic transmission and reception of identification sign.
Structure	Shall be of the structure that the RF and modulator sections excluding antenna cannot easily be opened.
Note	DS: Direct spread FH: Frequency hopping


	OFDM: Orthogonal frequency division multiplexing

Note: The Technical Standards described here do not cover all of the regulated items.

BlueAsia

6.1 Transmitter Requirements

6.1.1 EUT test voltage and Frequency

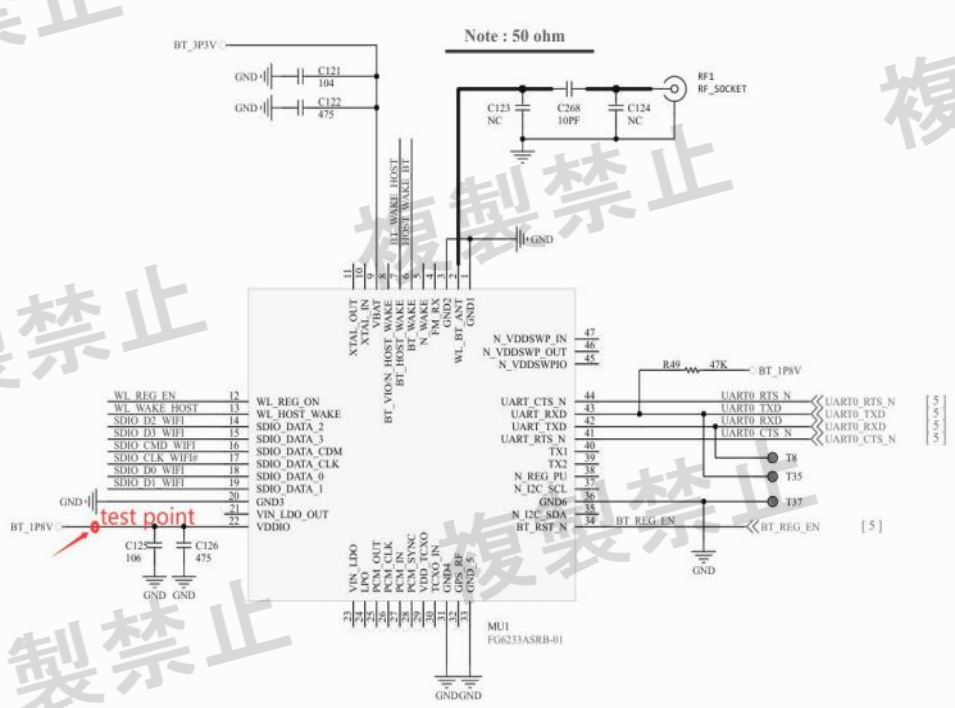EUT test voltage	
Power Supply:	DC 3.85V
Test voltage require:	The power supply is DC 3.85V by battery. The supply voltage of RF part is varied within +/-1%. When DC 3.85V +/- 10%, so DC 3.85V is shown in the test report.
Power Supply view:	
Power Supply result:	The measurement result of the voltage fluctuation at RF circuit when DC 3.85V +/- 10%.

DC INPUT	RF circuit
4.235V	1.80V
3.850V	1.80V
3.465V	1.80V

Test condition	Ambient		
	Temperature(℃)	Humidity(%)	Voltage(V)
NTNV	24	48	DC 3.85
NTLV	N/A	N/A	N/A
NTHV	N/A	N/A	N/A

6.1.1.1 Test frequency

Test frequencies:	If the EUT can be set to 3 of more different (carrier) frequencies in 1 allocated band, testing shall be performed using the Lowest, Middle and the Highest frequency (L,M and H). If there are 2 or fewer frequencies, testing shall be performed with the available frequencies.

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top. 1 near middle and 1 near bottom


EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	N/A	N/A

Test frequencies are the lowest channel: 0 channel (2402 MHz), Middle channel, 39 channel (2441 MHz) and highest channel: 78 channel (2480 MHz).


6.1.2 Antenna Requirement

Standard requirement
Applicable for equipment with an antenna terminal, including testing terminals) If an antenna connector is available, all relevant tests will be carried out conducted. If not, tests will be carried out in an anechoic room or with a suitable test-fixture.
EUT Antenna
The antenna is FPC Antenna. The best case gain of the antenna is -0.1dBi from 2402~2480MHz.

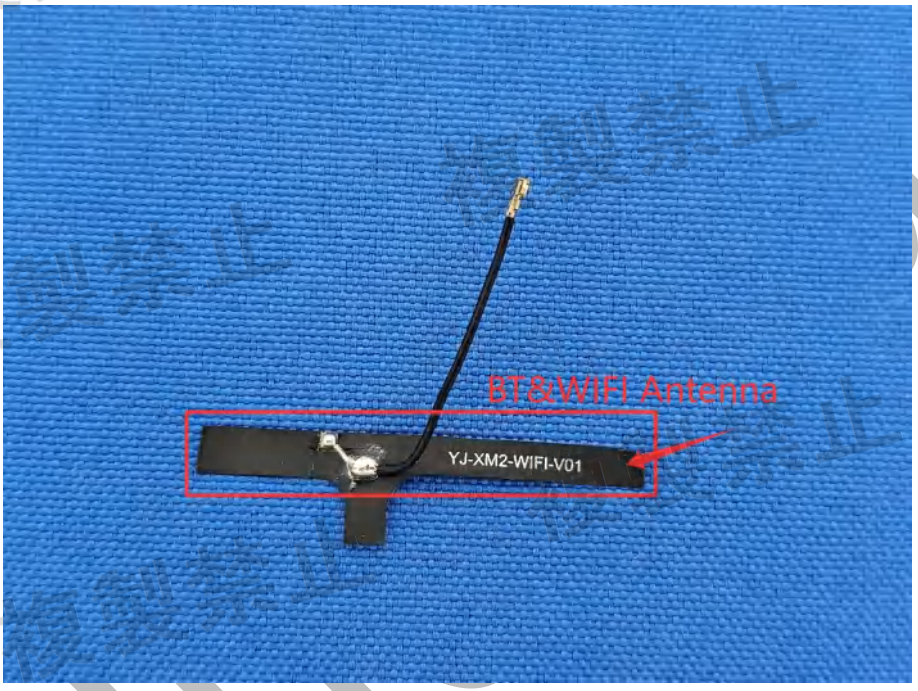

Result: An antenna connector is available; all relevant tests will be carried out conducted.

6.1.3 Frequency Error

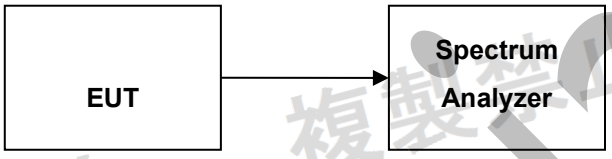Test Requirement:	Item 19 of Article 2 Paragraph 1		
Test Method:	MIC Notice No.88 Appendix No.43		
EUT Operation:			
Ambient:	Temp.: 24°C	Humid.: 46%	Press.: 1010 mbar
Test Status:	Test the EUT in transmitting mode without modulation. Test in Channel lowest (2402MHz), middle (2441MHz) and highest (2480MHz), keep in continuously transmitting status.		
Test Configuration:			
			
Test Conditions:	Frequency Counter or Spectrum Analyzer is used for measurement.		
EUT conditions:	Modulation/Spread/Hopping off, CW Tx If EUT does not accept “Modulation OFF” mode in the measurement, you may use “Modulation ON” mode. In that case you can use the Max power Frequency as the measuring results.		
Spectrum Analyzer conditions:	Frequency: Test Frequency Span 1MHz RBW 10KHz VBW 10KHz Sweep Time Auto Detector mode Positive peak Indication mode Max hold		
Technical standard:	Tolerance of frequency: ±50×10^{-6}		
Test result:	PASS		

BlueAsia
複製禁止

Measurement Record: **Uncertainty: ± 10Hz**


Test Result

TestCondition	TestMode	Channel	Result[ppm]	Limit[ppm]	Verdict
NTNV	CW	2402	3.33056	±50	PASS
		2441	3.27735	±50	PASS
		2480	3.22581	±50	PASS


Note: The nominal frequency shall be confirmed by the applicant and test lab.

Result plot as follows:


Test Graphs

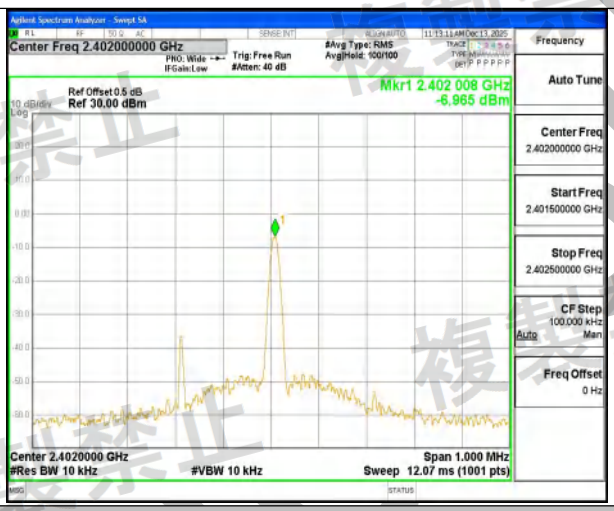

NTNV-CW-Ant1-2402-PASS

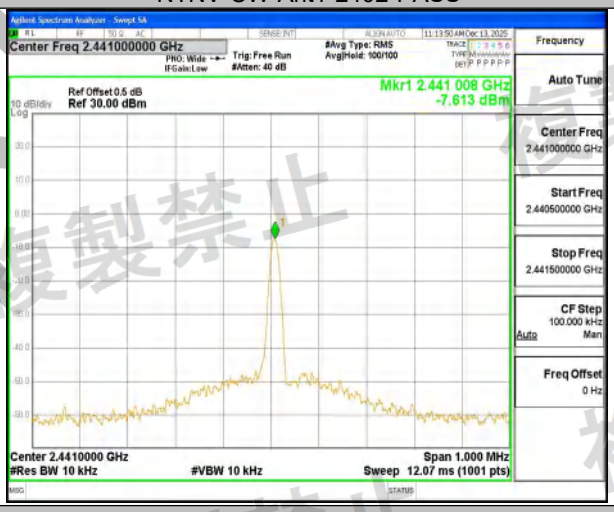


NTNV-CW-Ant1-2441-PASS

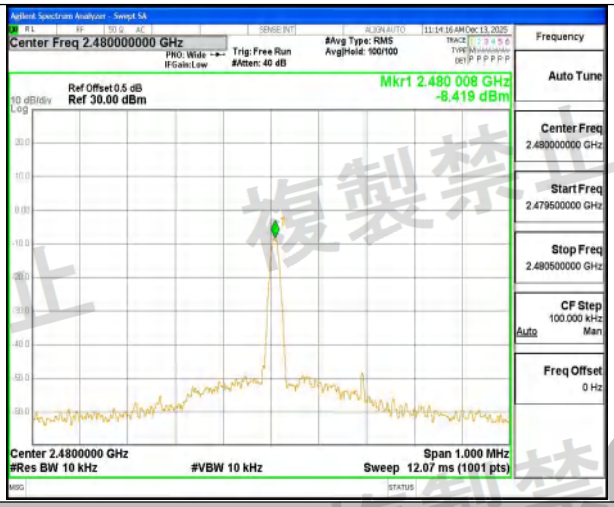

NTNV-CW-Ant1-2480-PASS

BlueAsia

6.1.4 Occupied Bandwidth (99%)

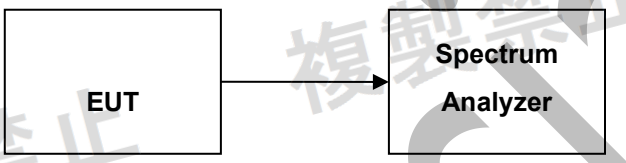Test Requirement:	Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
EUT Operation:	
Ambient:	Temp.: 24°C Humid.: 46% Press.: 1010 mbar
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listedbelow.
Test Configuration:	
	
EUT conditions:	Modulation/Spread/Hopping on, PN9 Modulation Tx For equipment using diffusion code, set to the test diffusion code and modulate with standard coding testsignal.
Spectrum Analyzer conditions:	Frequency: Test Frequency Span 120MHz (FHSS), RBW 1MHz VBW 1MHz Sweep Time Auto detector mode Positive peak Indication mode Max hold OBW 99%
Technical standard:	FH : 83.5MHz
Test result:	PASS

BlueAsia


Measurement Record: **Uncertainty: ± 10KHz**

Test Result


TestCondition	TestMode	Channel	Result [MHz]	Limit [MHz]	Verdict
NTNV	DH5	Hop	78.183	<=83.5	PASS
	2DH5	Hop	78.420	<=83.5	PASS
	3DH5	Hop	78.296	<=83.5	PASS

Result plot as follows:


Test Graphs

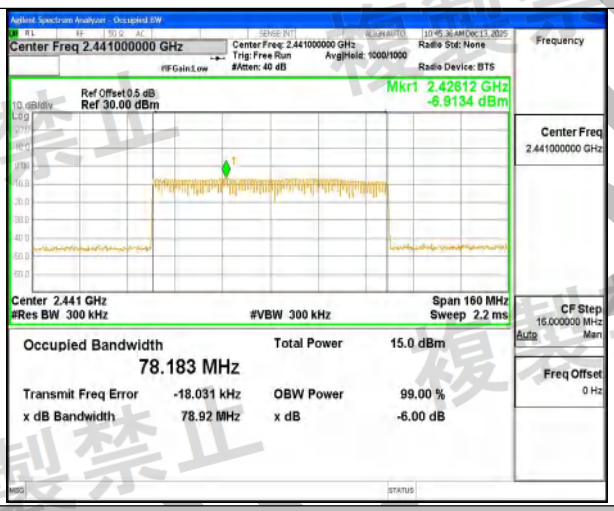

NTNV-DH5-Ant1-Hop_2441-PASS

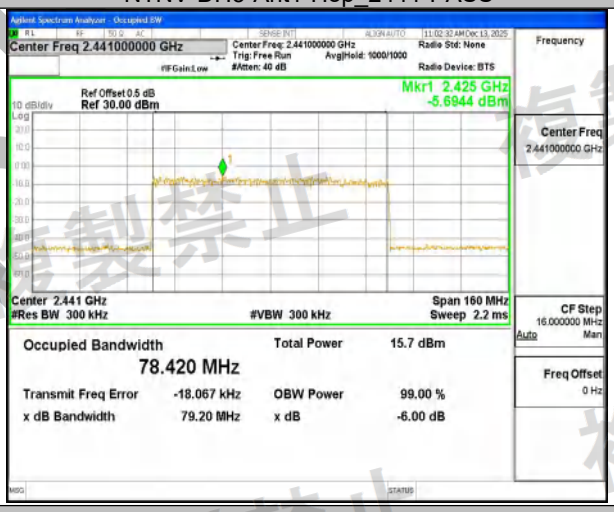


NTNV-2DH5-Ant1-Hop_2441-PASS

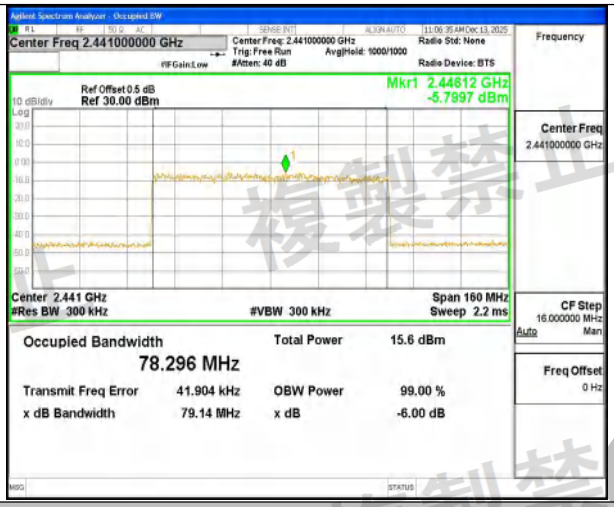

NTNV-3DH5-Ant1-Hop_2441-PASS

BlueAsia

6.1.5 Spread spectrum Bandwidth (90%)

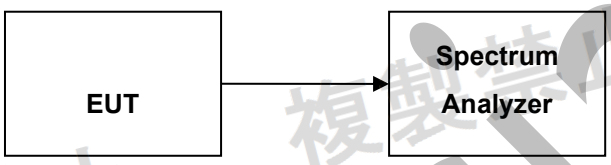Test Requirement:	Item 19 of Article 2 Paragraph 1		
Test Method:	MIC Notice No.88 Appendix No.43		
EUT Operation:			
Ambient:	Temp.: 24°C	Humid.: 46%	Press.: 1010 mbar
Test Status:	Pre-Scan has been conducted to determine the worst-case mode formal possible combinations between available modulations, data ratesand antenna ports (if EUT with antenna diversity architecture).Following channel(s) was (were) selected for the final test as listed below.		
Test Configuration:			
			
EUT conditions:	Modulation/Spread/Hopping on, PN9 Modulation Tx For equipment using diffusion code, set to the test diffusion code and modulate with standard coding testsignal.		
Spectrum Analyzer conditions:	Frequency: Test Frequency Span 120MHz (FHSS), RBW 1MHz VBW 1MHz Sweep Time Auto detector mode Positive peak Indication mode Max hold OBW 90% Spreading factor=90% Spread bandwidth/Transmission rate>=5 Transmission rate =1Mbps		
Technical standard:	N/A		
Test result:	N/A		

Measurement Record: **Uncertainty: ± 10KHz**

Test Result

TestCondition	TestMode	Channel	Result [MHz]	Verdict
NTNV	DH5	Hop	70.422	N/A
	2DH5	Hop	70.093	N/A
	3DH5	Hop	70.556	N/A


Note: Spread Factor = Spread Bandwidth/Symbol Rate

Symbol Rate=1 for DH5/2DH5/3DH5


BlueAsia
複製禁止

Result plot as follows:


Test Graphs

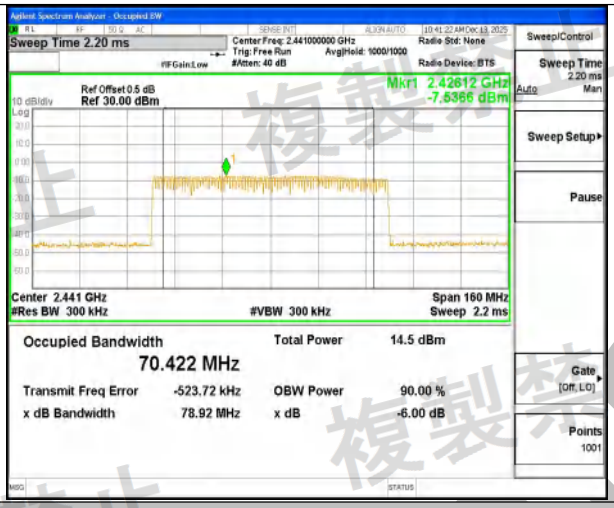

NTNV-DH5-Ant1-Hop_2441-PASS

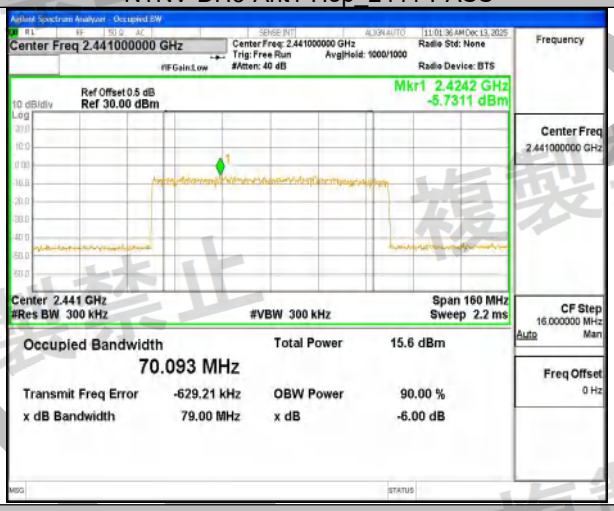


NTNV-2DH5-Ant1-Hop_2441-PASS

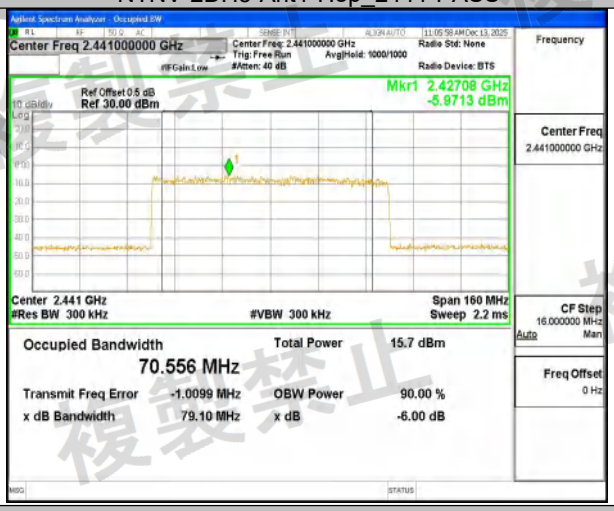

NTNV-3DH5-Ant1-Hop_2441-PASS

6.1.6 Antenna Power

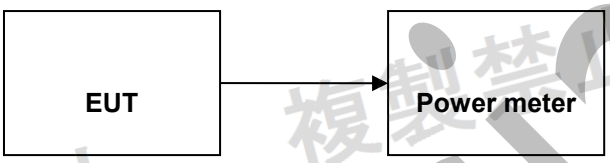Test Requirement:	Item 19 of Article 2 Paragraph 1		
Test Method:	MIC Notice No.88 Appendix No.43		
EUT Operation:			
Ambient:	Temp.: 24°C	Humid.: 46%	Press.: 1010mbar
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.		
Test Configuration:			
			
EUT conditions:	Modulation/Spread/Hopping on, PN9 Modulation Tx For equipment using diffusion code, set to the test diffusion code and modulate with standard coding testsignal.		
Power meter conditions(FHSS):	Step1: First, measure the total power using a power meter. Step2: Antenna power(mW/MHz)=conducted power(mW)/Spread bandwidth(MHz).		
Technical standard:	Antenna Power (1) FH, FH+DS , FH+OFDM 3mW/MHz or less (used in the range of 2400~2483.5 MHz) (2) OFDM , DS other than (1) 10mW/MHz or less (3) Other than (1) & (2) 10mW or less Tolerance: ＋20%		
Test result:	PASS		

Measurement Record: **Uncertainty: ± 10 kHz / ±1dB**

Test Result

Test Mode	Antenna	Channel	Total conducted power (dBm)	Total conducted power (mW)	Spread bandwidth (MHz)	Antenna power (mW/MHz)	Limit (mw/MHz)	Verdict
DH5	Ant1	Hopping	10.70	11.749	70.422	0.1668	<=3	PASS
2DH5	Ant1	Hopping	10.98	12.531	70.093	0.1788	<=3	PASS
3DH5	Ant1	Hopping	11.28	13.428	70.556	0.1903	<=3	PASS

Remark:

Antenna power(mW/MHz)=conducted power(mW)/Spread bandwidth(MHz) .

Tolerance								
Test Condition	Test Mode	Antenna	Channel	Power (mW/MHz)	RatedPower (mW/MHz)	Result (%)	Limit (%)	Verdict
NTNV	DH5	Ant1	Hopping	0.1668	0.50	-66.64	+20	PASS
	2DH5	Ant1	Hopping	0.1788	0.50	-64.24	+20	PASS
	3DH5	Ant1	Hopping	0.1903	0.50	-61.94	+20	PASS

EIRP							
TestCondition	TestMode	Antenna	Channel	EIRP (mW/MHz)	EIRP (dBm/MHz)	Limit(dBm/MHz)	Verdict
NTNV	DH5	Ant1	Hopping	0.1630	-7.878	<=6.91	PASS
	2DH5	Ant1	Hopping	0.1747	-7.577	<=6.91	PASS
	3DH5	Ant1	Hopping	0.1860	-7.305	<=6.91	PASS

Remark:

Conducted rated power:


F1D: 0.50mW/MHz

G1D: 0.50mW/MHz

Tolerance (%) :[(test value- rate power)/rater power]*100

EIRP= antenna power in dBm/MHz+ gain in dBi

6.1.7 Spurious Emissions of Tx

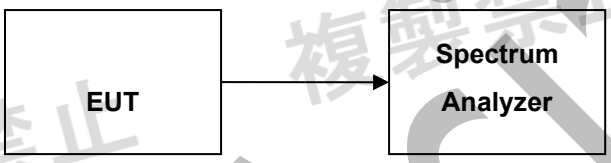Test Requirement:	Item 19 of Article 2 Paragraph 1		
Test Method:	MIC Notice No.88 Appendix No.43		
EUT Operation:			
Ambient:	Temp.: 24°C	Humid.: 46%	Press.: 1010 mbar
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.		
Test Configuration:			
			
EUT conditions:	Modulation/Spread/Hopping on, PN9 Modulation Tx For equipment using diffusion code, set to the test diffusion code and modulate with standard coding testsignal.		
Measurement Procedure:	Step1 All spurious are measured from 30MHz to 13GHz by peak mode.		
Spectrum Analyzer conditions(Step 1):	Frequency: 30MHz – 2400MHz , 2483.5MHz –13GHz RBW 1000kHz (30 – 1GHz) , 1000KHz (over 1GHz) VBW 1000kHz (30 – 1GHz) , 1000KHz (over 1GHz) Sweep Time Auto detector mode Positive peak Indication mode Max hold		
Spectrum Analyzer conditions(Step 2):	Frequency: Spurious Frequency Span 0Hz RBW 1MHz VBW 1MHz Sweep Time Auto Detector mode Sample Indication mode Max hold		
Technical standard:	(1) Below 2387 MHz : 2.5μW/MHz;-26dbm/Mhz (2) 2387 to 2400 MHz : 25μW/MHz;-16dbm/Mhz (3) 2483.5 through 2496.5 MHz : 25μW/MHz;-16dbm/Mhz (4) Over 2496.5 MHz : 2.5μW/MHz;-26dbm/Mhz		
Test result:	PASS		

Measurement Record: **Uncertainty:** ±1dB


Test Result

Test Condition	Test Mode	Antenna	Frequency[MHz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm/ MHz]	Limit [dBm/ MHz]	Verdict
NTNV	DH5	Ant1	2402	30~2387	2285.65	-57.34	≤-26	PASS
NTNV	DH5	Ant1	2402	2387~2400	2397.93	-40.41	≤-16	PASS
NTNV	DH5	Ant1	2402	2483.5~2496.5	2491.89	-62.53	≤-16	PASS
NTNV	DH5	Ant1	2402	2496.5~13000	6485.93	-54.85	≤-26	PASS
NTNV	DH5	Ant1	2441	30~2387	2363.43	-61.44	≤-26	PASS
NTNV	DH5	Ant1	2441	2387~2400	2390.78	-62.24	≤-16	PASS
NTNV	DH5	Ant1	2441	2483.5~2496.5	2490.23	-51.00	≤-16	PASS
NTNV	DH5	Ant1	2441	2496.5~13000	6485.40	-55.39	≤-26	PASS
NTNV	DH5	Ant1	2480	30~2387	2378.75	-54.80	≤-26	PASS
NTNV	DH5	Ant1	2480	2387~2400	2397.69	-40.74	≤-16	PASS
NTNV	DH5	Ant1	2480	2483.5~2496.5	2485.24	-61.76	≤-16	PASS
NTNV	DH5	Ant1	2480	2496.5~13000	6499.06	-54.55	≤-26	PASS
NTNV	2DH5	Ant1	2402	30~2387	2217.59	-60.86	≤-26	PASS
NTNV	2DH5	Ant1	2402	2387~2400	2399.97	-40.76	≤-16	PASS
NTNV	2DH5	Ant1	2402	2483.5~2496.5	2494.53	-61.62	≤-16	PASS
NTNV	2DH5	Ant1	2402	2496.5~13000	6512.19	-55.58	≤-26	PASS
NTNV	2DH5	Ant1	2441	30~2387	2177.23	-59.06	≤-26	PASS
NTNV	2DH5	Ant1	2441	2387~2400	2397.75	-41.15	≤-16	PASS
NTNV	2DH5	Ant1	2441	2483.5~2496.5	2486.50	-61.93	≤-16	PASS
NTNV	2DH5	Ant1	2441	2496.5~13000	6472.27	-54.64	≤-26	PASS
NTNV	2DH5	Ant1	2480	30~2387	2293.01	-54.11	≤-26	PASS
NTNV	2DH5	Ant1	2480	2387~2400	2392.72	-61.66	≤-16	PASS
NTNV	2DH5	Ant1	2480	2483.5~2496.5	2491.38	-52.90	≤-16	PASS
NTNV	2DH5	Ant1	2480	2496.5~13000	6431.83	-54.09	≤-26	PASS
NTNV	3DH5	Ant1	2402	30~2387	2364.61	-61.44	≤-26	PASS
NTNV	3DH5	Ant1	2402	2387~2400	2399.96	-42.08	≤-16	PASS
NTNV	3DH5	Ant1	2402	2483.5~2496.5	2492.55	-61.92	≤-16	PASS
NTNV	3DH5	Ant1	2402	2496.5~13000	6512.19	-54.89	≤-26	PASS
NTNV	3DH5	Ant1	2441	30~2387	2311.58	-55.24	≤-26	PASS
NTNV	3DH5	Ant1	2441	2387~2400	2399.60	-50.19	≤-16	PASS
NTNV	3DH5	Ant1	2441	2483.5~2496.5	2490.78	-61.86	≤-16	PASS


NTNV	3DH5	Ant1	2441	2496.5~13000	6485.40	-55.60	≤-26	PASS
NTNV	3DH5	Ant1	2480	30~2387	2286.83	-53.70	≤-26	PASS
NTNV	3DH5	Ant1	2480	2387~2400	2397.22	-46.45	≤-16	PASS
NTNV	3DH5	Ant1	2480	2483.5~2496.5	2484.23	-61.77	≤-16	PASS
NTNV	3DH5	Ant1	2480	2496.5~13000	6432.36	-55.35	≤-26	PASS

BlueAsia


Test Graphs

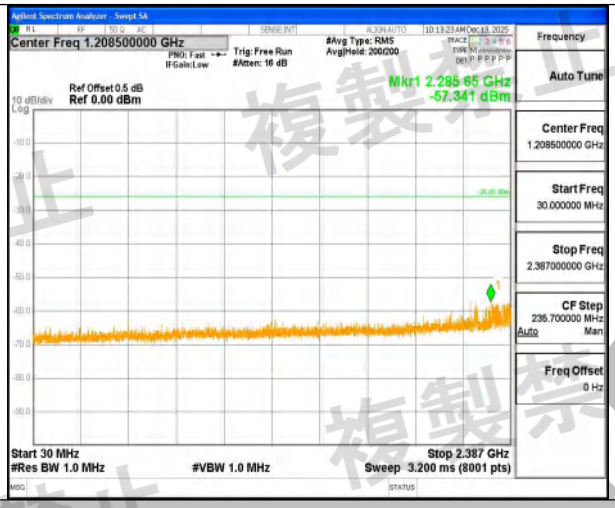


NTNV-DH5-Ant1-2402-30~2387-PASS

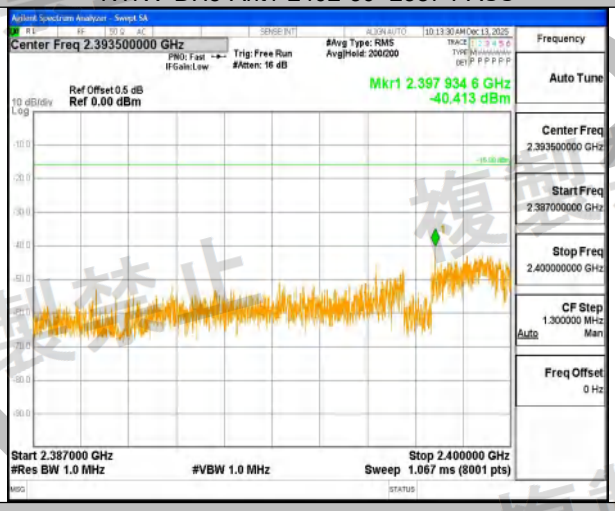


NTNV-DH5-Ant1-2402-2387~2400-PASS

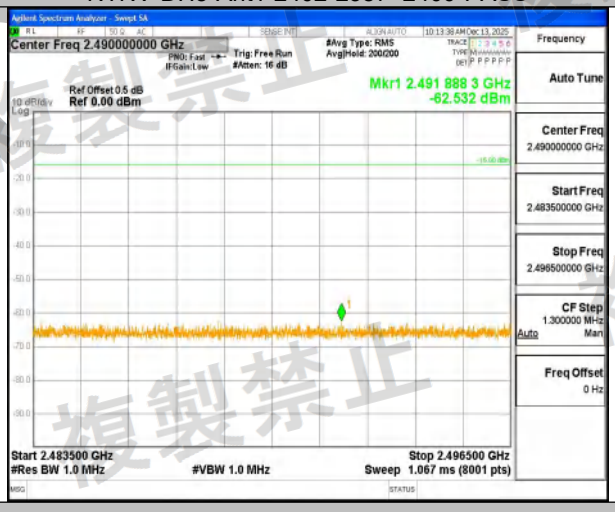


NTNV-DH5-Ant1-2402-2483.5~2496.5-PASS

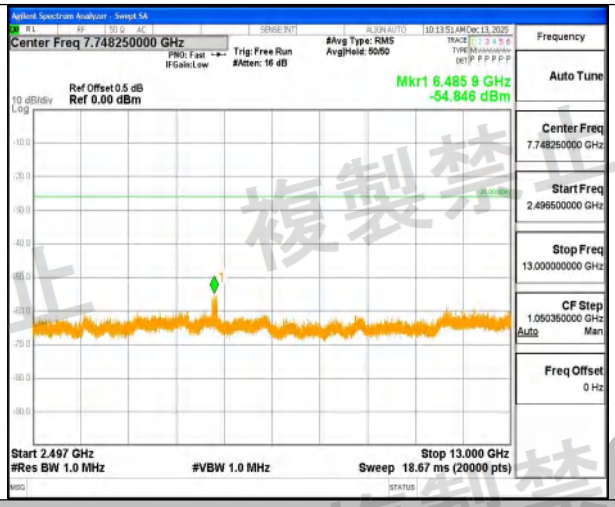


NTNV-DH5-Ant1-2402-2496.5~13000-PASS

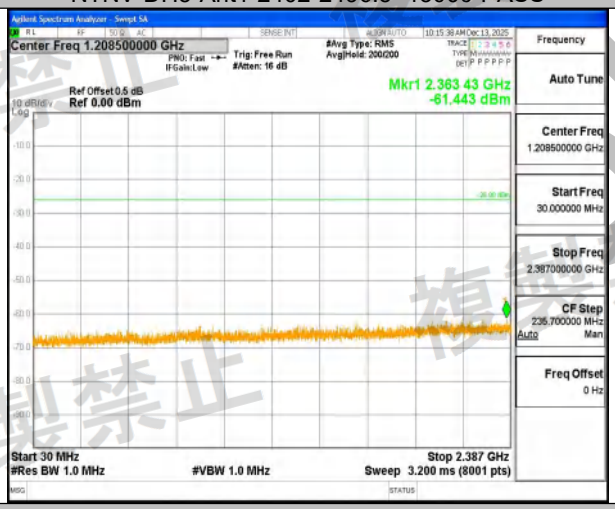


NTNV-DH5-Ant1-2441-30~2387-PASS

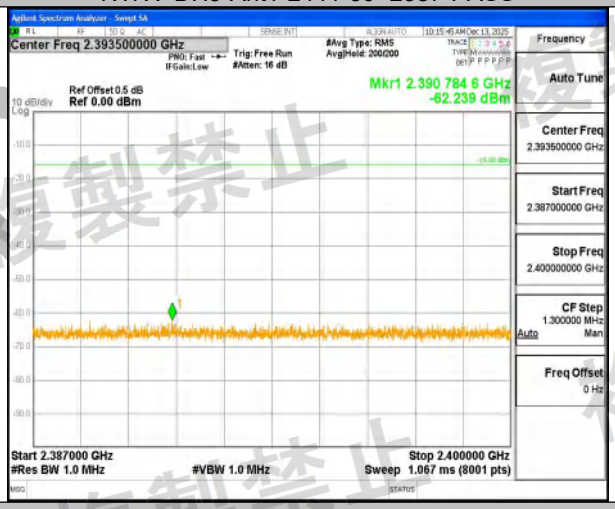


NTNV-DH5-Ant1-2441-2387~2400-PASS

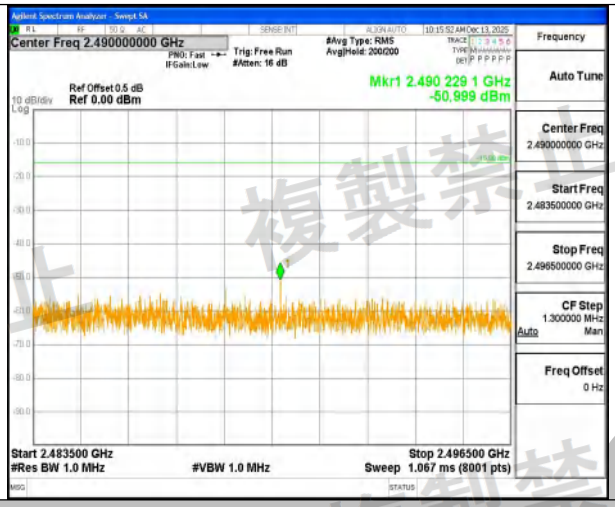


NTNV-DH5-Ant1-2441-2483.5~2496.5-PASS

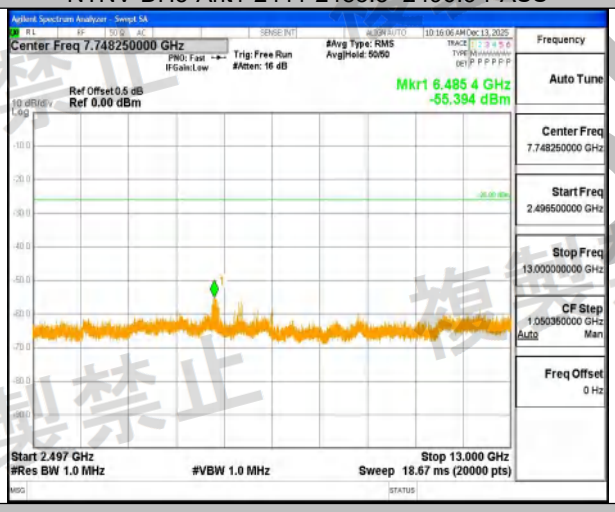


NTNV-DH5-Ant1-2441-2496.5~13000-PASS

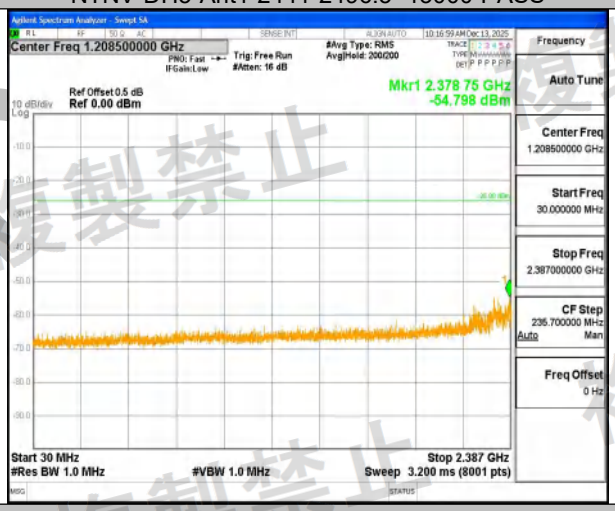


NTNV-DH5-Ant1-2480-30~2387-PASS

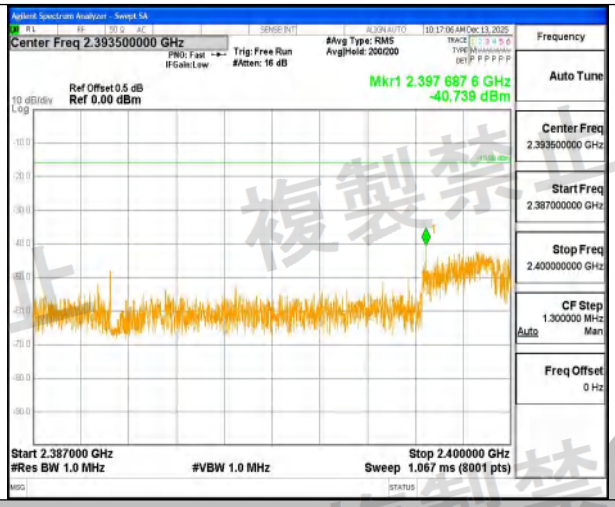


NTNV-DH5-Ant1-2480-2387~2400-PASS

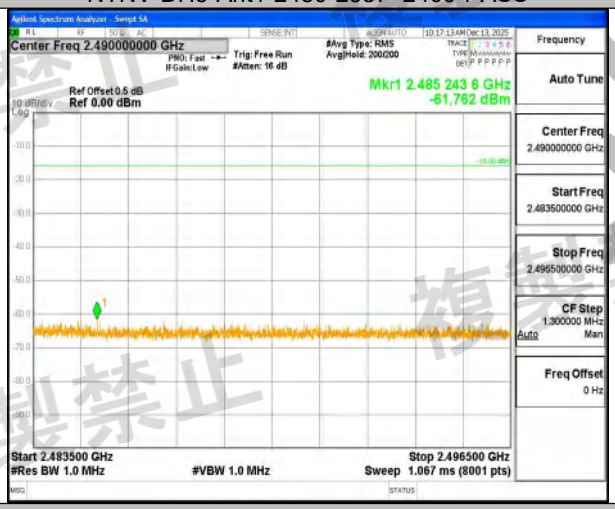


NTNV-DH5-Ant1-2480-2483.5~2496.5-PASS

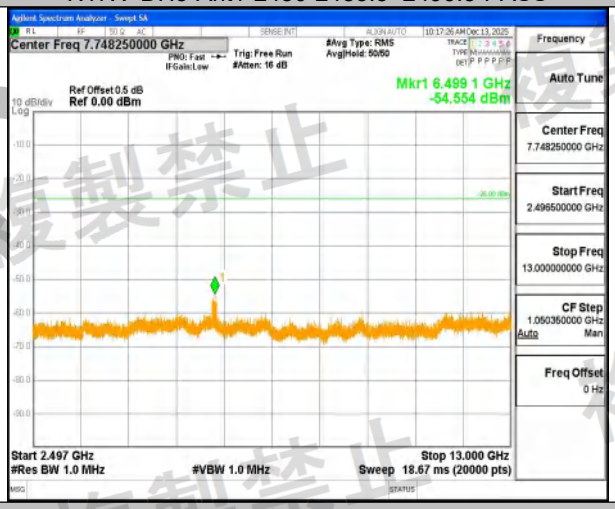


NTNV-DH5-Ant1-2480-2496.5~13000-PASS

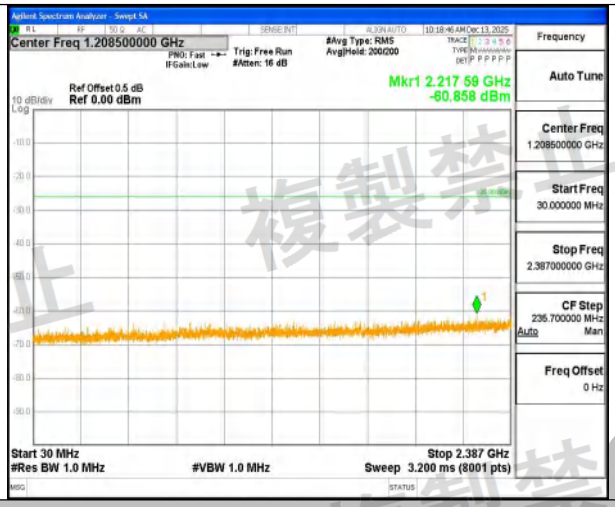


NTNV-2DH5-Ant1-2402-30~2387-PASS

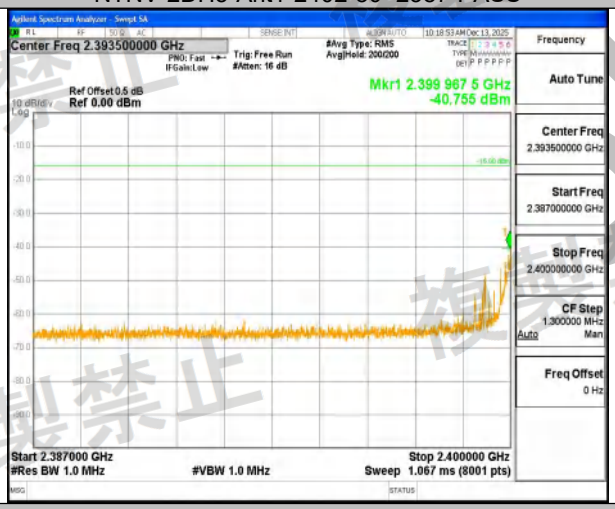


NTNV-2DH5-Ant1-2402-2387~2400-PASS

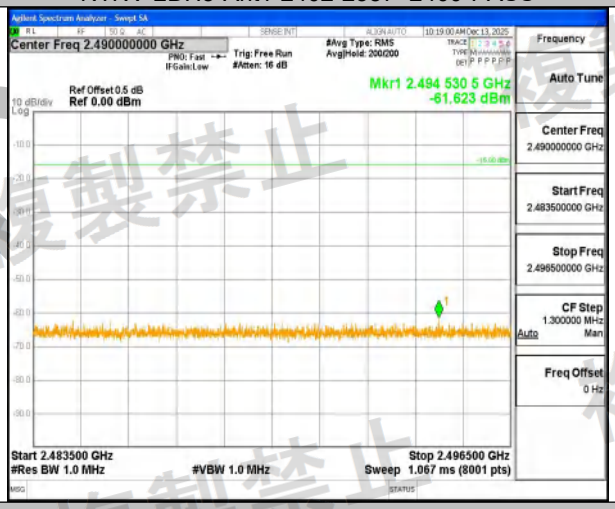


NTNV-2DH5-Ant1-2402-2483.5~2496.5-PASS

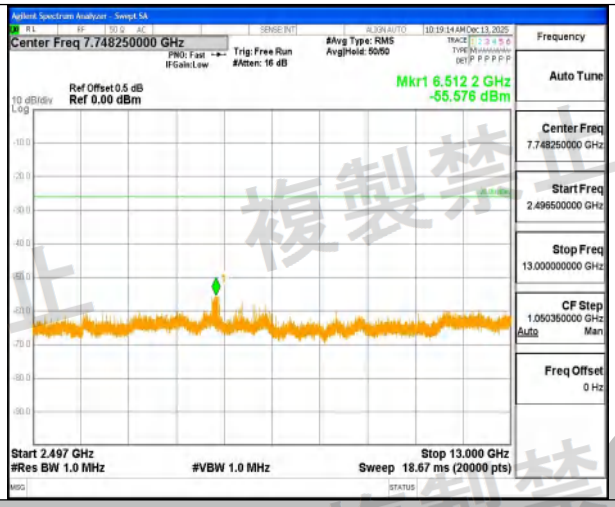


NTNV-2DH5-Ant1-2402-2496.5~13000-PASS

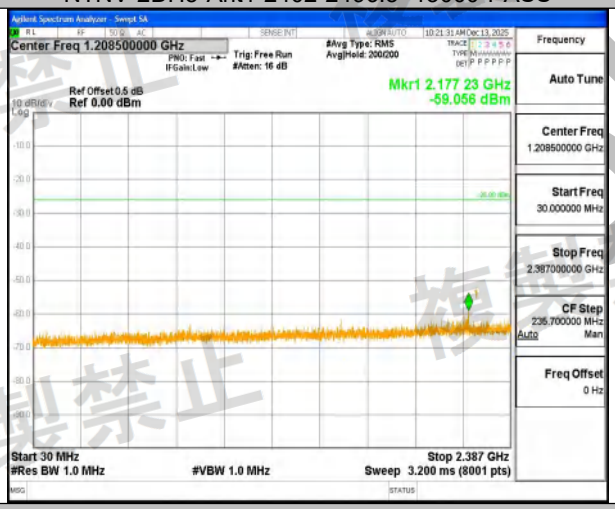


NTNV-2DH5-Ant1-2441-30~2387-PASS

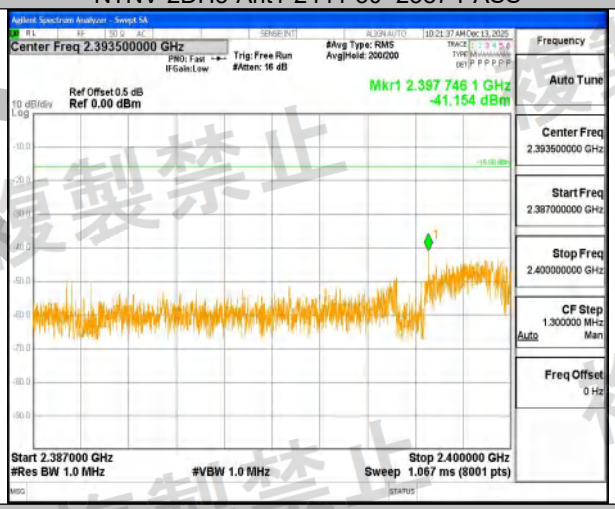


NTNV-2DH5-Ant1-2441-2387~2400-PASS

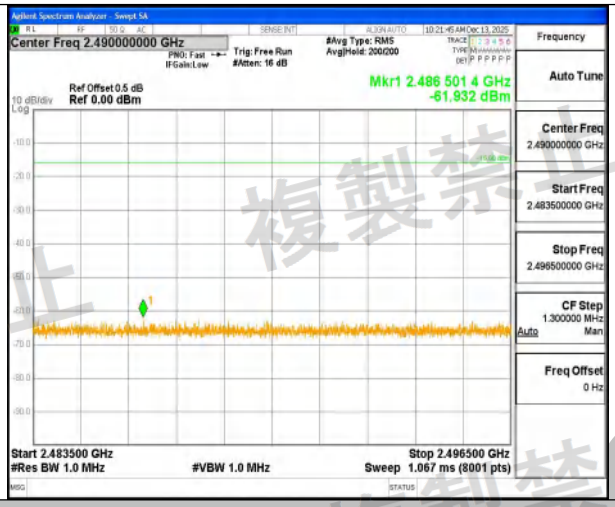


NTNV-2DH5-Ant1-2441-2483.5~2496.5-PASS

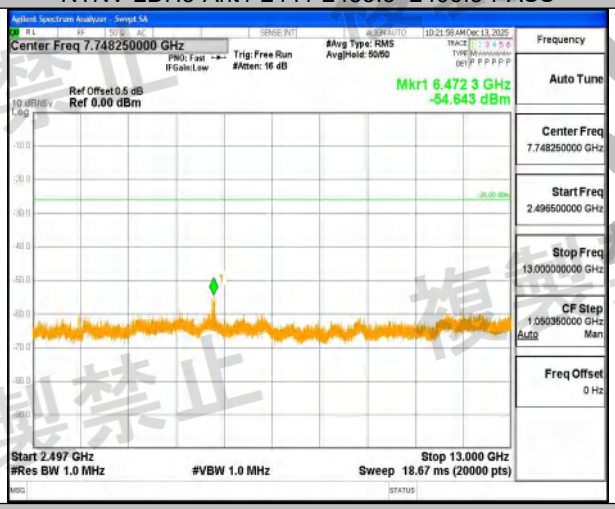


NTNV-2DH5-Ant1-2441-2496.5~13000-PASS

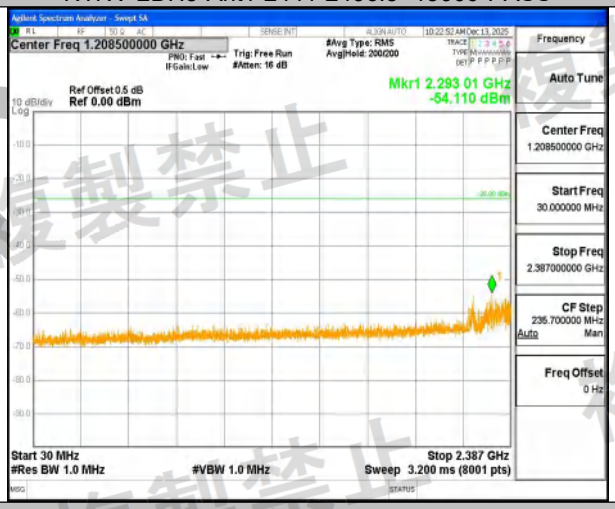


NTNV-2DH5-Ant1-2480-30~2387-PASS

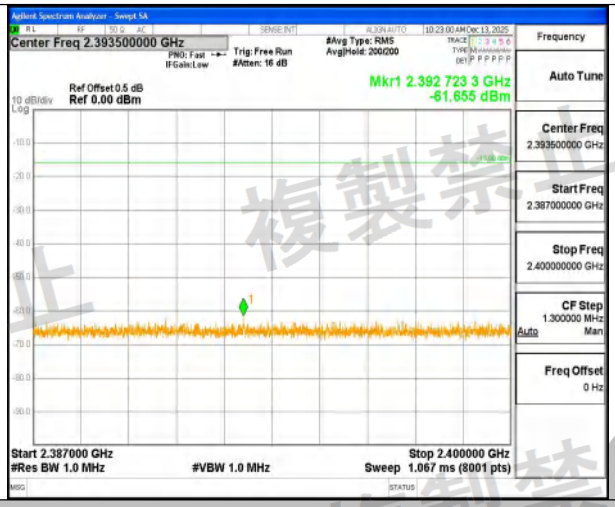


NTNV-2DH5-Ant1-2480-2387~2400-PASS

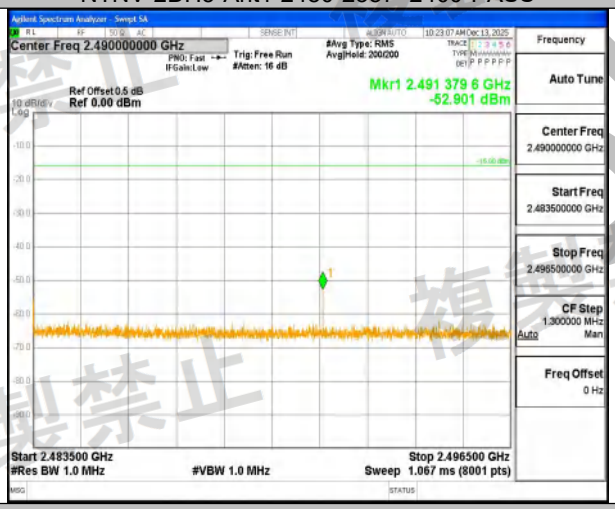


NTNV-2DH5-Ant1-2480-2483.5~2496.5-PASS

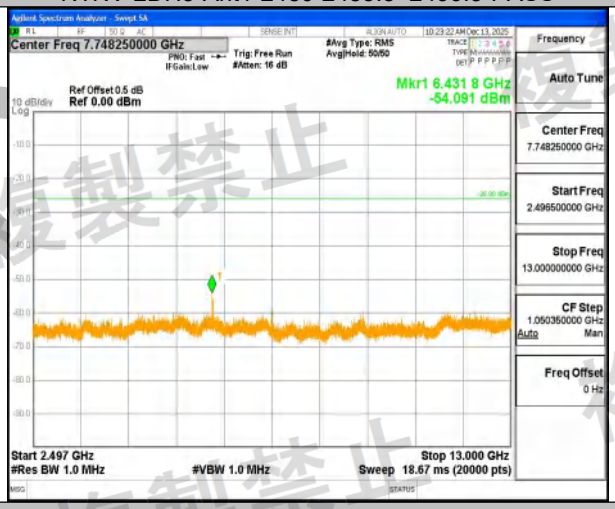


NTNV-2DH5-Ant1-2480-2496.5~13000-PASS

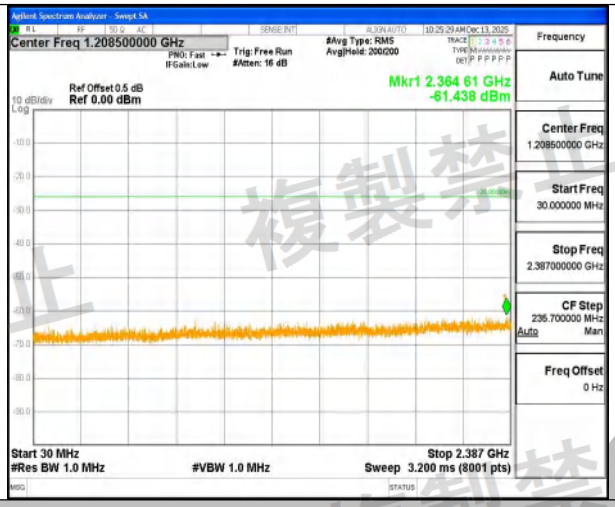


NTNV-3DH5-Ant1-2402-30~2387-PASS

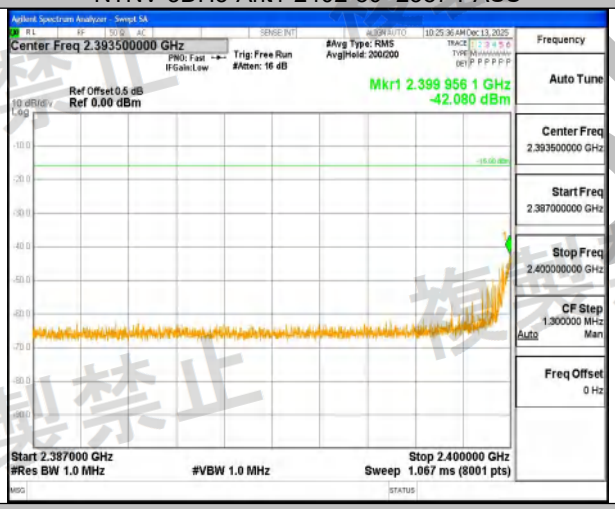


NTNV-3DH5-Ant1-2402-2387~2400-PASS

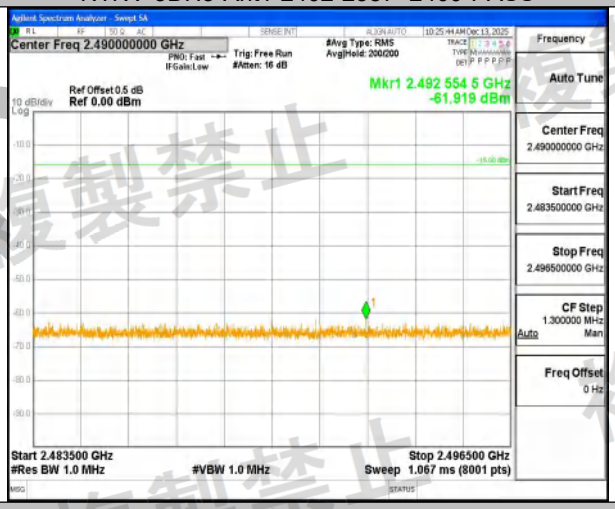


NTNV-3DH5-Ant1-2402-2483.5~2496.5-PASS

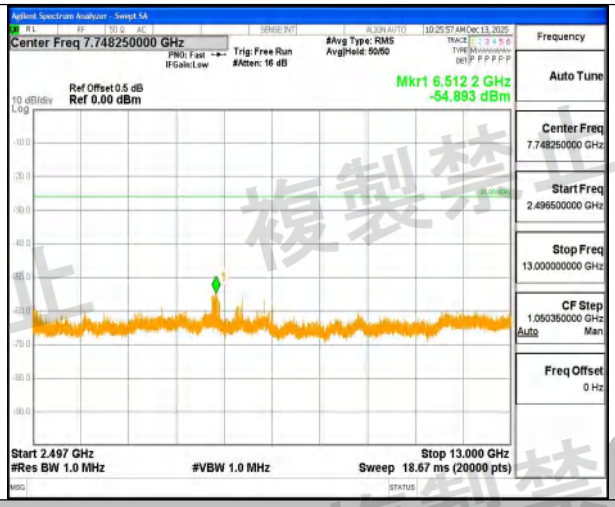


NTNV-3DH5-Ant1-2402-2496.5~13000-PASS

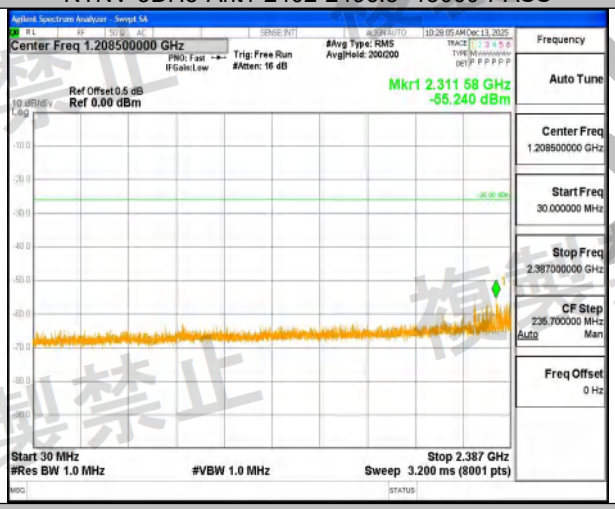


NTNV-3DH5-Ant1-2441-30~2387-PASS

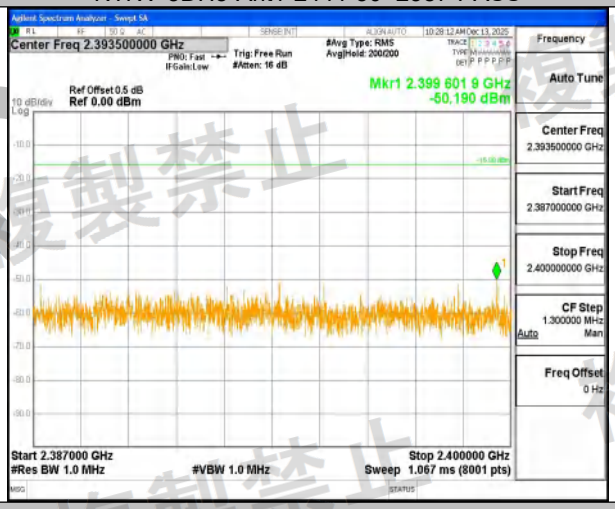


NTNV-3DH5-Ant1-2441-2387~2400-PASS

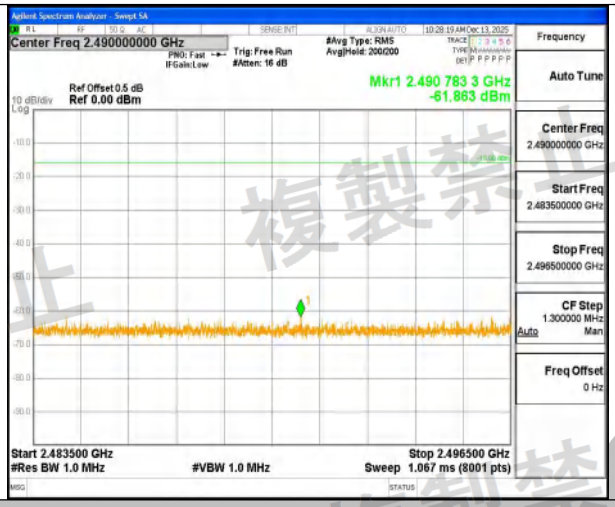


NTNV-3DH5-Ant1-2441-2483.5~2496.5-PASS

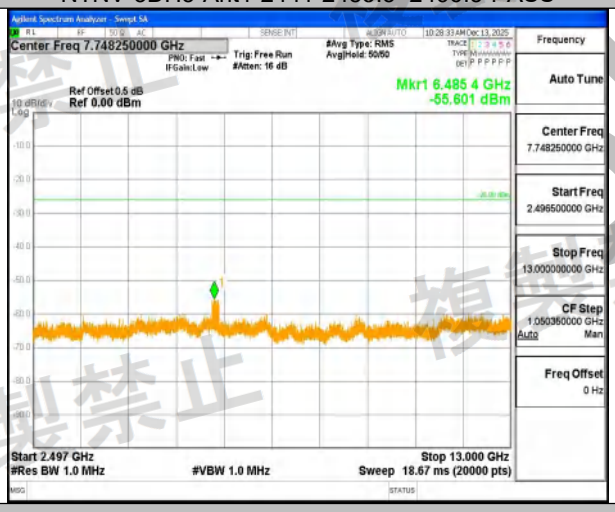


NTNV-3DH5-Ant1-2441-2496.5~13000-PASS

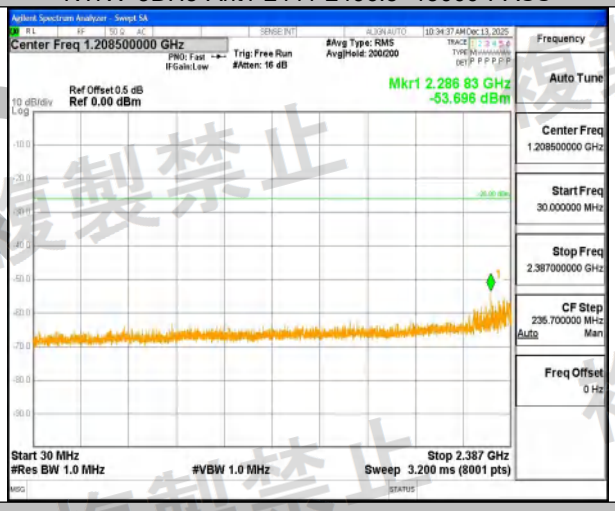


NTNV-3DH5-Ant1-2480-30~2387-PASS

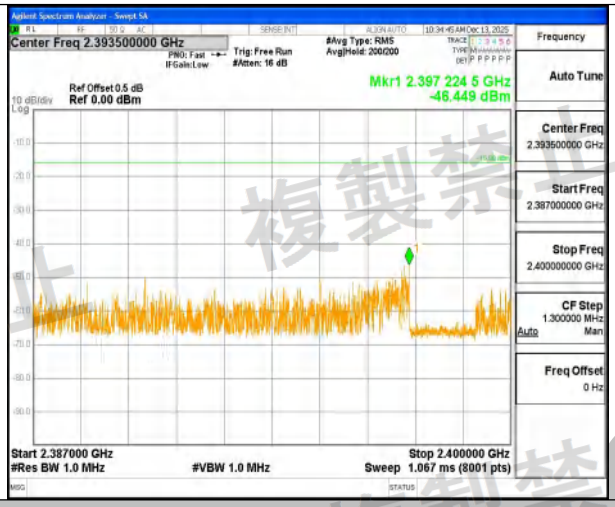

NTNV-3DH5-Ant1-2480-2387~2400-PASS

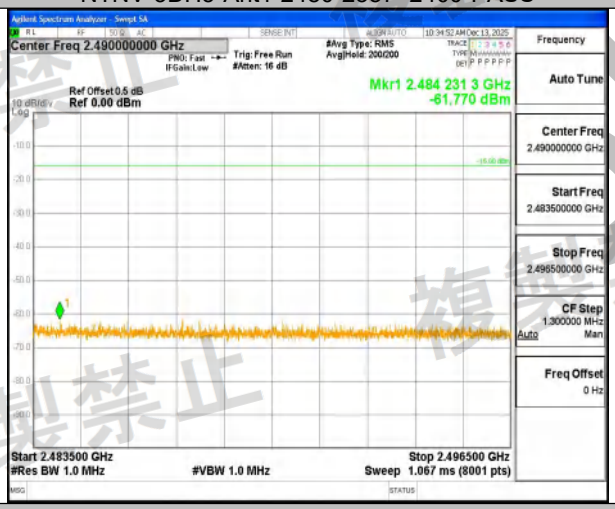


NTNV-3DH5-Ant1-2480-2483.5~2496.5-PASS

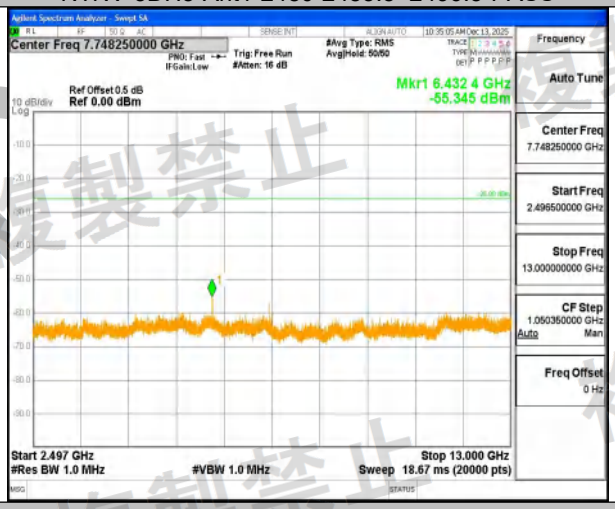

NTNV-3DH5-Ant1-2480-2496.5~13000-PASS

6.1.8 Dwell Time

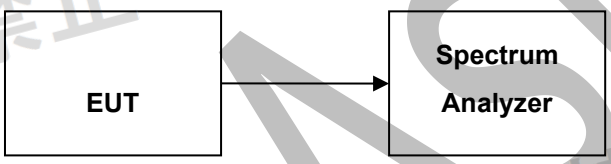Test Requirement:	Item 19 of Article 2 Paragraph 1		
Test Method:	MIC Notice No.88 Appendix No.43		
EUT Operation:			
Ambient:	Temp.: 24°C	Humid.: 46%	Press.: 1010 mbar
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below. Modulation/Spread/Hopping ON, Hopping frequency is fixed, Bluetooth equipment is setting DH5 mode		
Test Configuration:			
			
EUT conditions:	Modulation/Spread/Hopping ON,Hopping frequency is fixed, Bluetooth equipment is setting DH5 mode For equipment using diffusion code, set to the test diffusion code and modulate with standard coding testsignal.		
SpectrumAnalyzerconditions:	Frequency: Test Frequency (fixed hopping frequency) Span 0 Hz RBW 1 MHz VBW 1 MHz Sweep Time EUT condition Trigger Video Trigger Measures the Transmission time of 1 burst (sec) Measures the Burst cycle (sec)		
Calculation procedure :	Dwell time= 0.4s x Spreading Rate x one brurst time x Number of transmission (1s) Note: Spreading rate = [Spread bandwidth (actual measurement value)] / [Transmission rate] Number of transmission (1s) of DH1/2DH1/3DH1=1600/(2x79) Number of transmission (1s) of DH3/2DH3/3DH3=1600/(4x79) Number of transmission (1s) of DH5/2DH5/3DH5=1600/(6x79)		
Technical standard:	Less than 0.4 sec		
Test result:	PASS		


Test Result

Test Condition	Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	Result[s]	Limit [s]	Verdict
NTNV	DH5	Ant1	Hop_2441	2.89	0.308	≤0.4	PASS
NTNV	2DH5	Ant1	Hop_2441	2.89	0.308	≤0.4	PASS
NTNV	3DH5	Ant1	Hop_2441	2.89	0.308	≤0.4	PASS


Remark: Calculated method: Dwell time=0.4s x Spreading Rate x One brurst time x number of transmission (1s)
Note: Spreading rate=[Spread bandwidth (actual measurement value)]/[Transmission rate]
Transmission rate is 1.0 Mbps.
One brurst time [s]= Mark2/1000, Mark2 selected in Test Graphs
Number of transmission (1s) of DH5/2DH5/3DH5=1600/(6 x 79)
No. of hopping channel=79

BlueAsia


Test Graphs

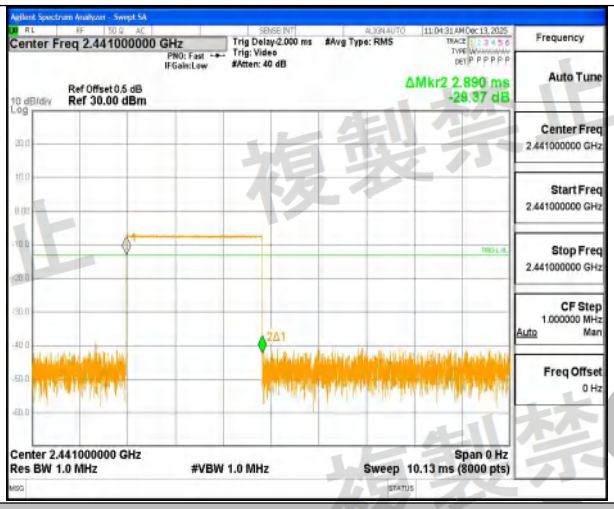

NTNV-DH5-Ant1-Hop_2441-PASS

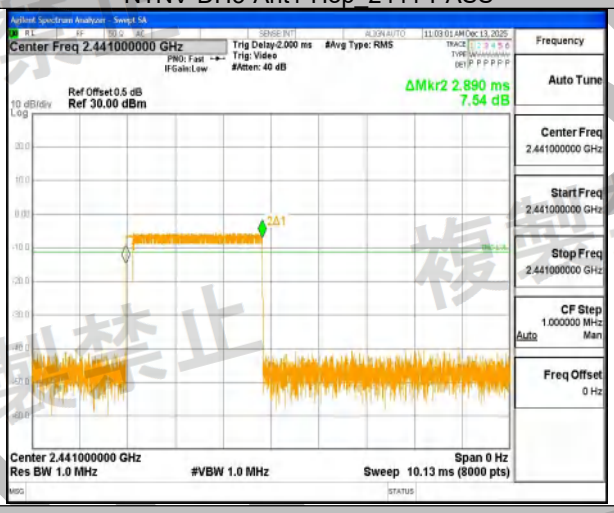

NTNV-2DH5-Ant1-Hop_2441-PASS

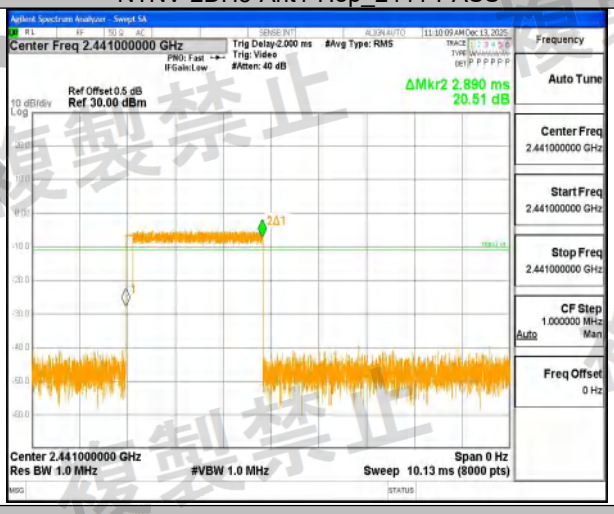

NTNV-3DH5-Ant1-Hop_2441-PASS

6.1.9 Pseudorandom Frequency Hopping Sequence

Standard requirement


Article 2, Item (19) Notice 88 Appendix 43 requirement:
The EUT shall have the capability to transmit or to receive the MAC identification automatically, so that sender and receiver shall exclude other equipment.
EUT Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

• Number of shift register stages: 9


• Length of pseudo-random sequence: 2^9 -1 = 511 bits

• Longest sequence of zeros: 8 (non-inverted signal)

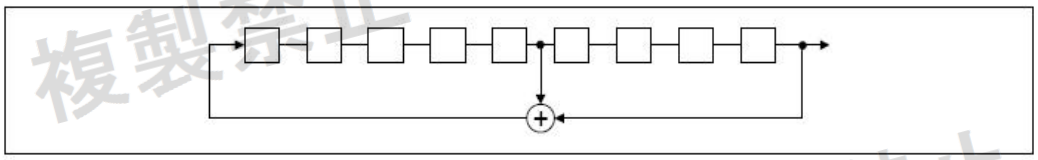

Linear Feedback Shift Register for Generation of the PRBS sequence

An example ofPseudorandom Frequency Hopping Sequence as follow:

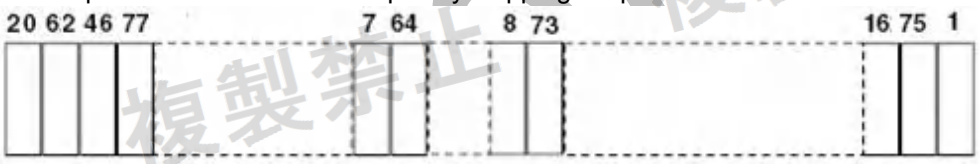

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6.1.10 Interference prevention function

1) Measurement system diagram

(1) When transmitting identification code



2)Condition of measuring instrument

(1) Demodulator must be able to demodulate the transmitting signal emitted by test equipment and to indicate the identification code.

3)Condition of test equipment The mode of normal use.

4) Measuring operation procedure

(1) When test equipment has the function to transmit identification code automatically:

A)Transmit the predetermined identification code from test equipment.

B)Confirm the transmitted identification code by demodulator.

MAC Address:

22:22:63:73:f6:a8

5)Test result: The unit does meet the requirements (Good).

Test result: PASS

BlueAsia


6.1.11 RF accessibility

Standard requirement

Article 49-20, paragraph 1 (a)


The EUT shall be constructed in such a way that sensitive RF parts, (like modulation and oscillator parts) cannot be reached easily by the user. These parts shall be covered by soldered metal caps or glue or by other mechanical covers. If the covers are fixed with screws, these shall be not the common type(s) like a Phillips, but special versions like Torx, so that the user cannot open the device with common tools.

☒ RF and Modulation components are covered with shielding case and this shielding case is soldered.
☐ RF and Modulation parts are mounted on PCB with surface mount technology, the antenna is printed on PCB, chip is welded on PCB,and there is no any adjustable parts on PCB or adjustable parts are not exposed. The interval of terminals: 0.5 mm Number of terminals: 33

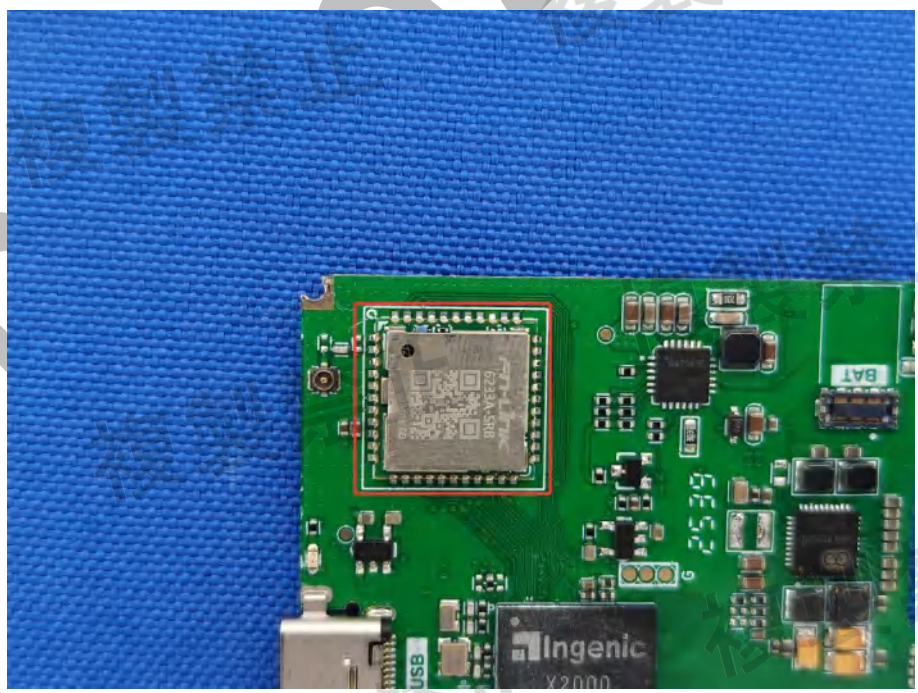

6.2 Receiver Requirements


6.2.1 Spurious Emissions of Rx

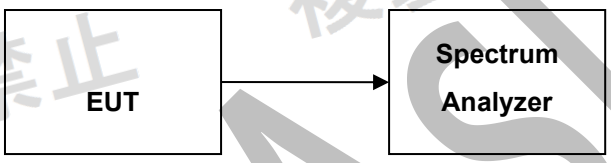Test Requirement:	Item 19 of Article 2 Paragraph 1		
Test Method:	MIC Notice No.88 Appendix No.43		
EUT Operation:			
Ambient:	Temp.: 24°C	Humid.: 46%	Press.: 1010 mbar
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.		
Test Configuration:			
			
EUT conditions:	Rx		
Measurement Procedure:	Step1 All spurious are measured from 30MHz to 13 GHz by peak mode.		
Spectrum Analyzer conditions(Step 1):	Frequency: 30MHz – 2400MHz , 2483.5MHz –13GHz RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) Sweep Time Auto detector mode Positive peak Indication mode Max hold		
Spectrum Analyzer Conditions(Step 2):	Frequency: Spurious Frequency Span 0 Hz RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) Sweep Time Auto detector mode Sample Indication mode Max hold		
Technical standard:	(1) Below 1 GHz : 4 nW ;-54dbm (2) 1 GHz and over : 20 nW ;-47dbm		
Test result:	PASS		


Test Result

Test Condition	Test Mode	Antenna	Frequency[MHz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Verdict
NTNV	DH5	Ant1	2402	30~1000	984.36	-79.15	≤-54	PASS
NTNV	DH5	Ant1	2402	1000~13000	3200.91	-74.03	≤-47	PASS
NTNV	DH5	Ant1	2441	30~1000	984.36	-79.06	≤-54	PASS
NTNV	DH5	Ant1	2441	1000~13000	3253.11	-73.25	≤-47	PASS
NTNV	DH5	Ant1	2480	30~1000	984.36	-79.08	≤-54	PASS
NTNV	DH5	Ant1	2480	1000~13000	7766.54	-59.61	≤-47	PASS
NTNV	2DH5	Ant1	2402	30~1000	984.36	-78.84	≤-54	PASS
NTNV	2DH5	Ant1	2402	1000~13000	3506.93	-71.86	≤-47	PASS
NTNV	2DH5	Ant1	2441	30~1000	984.36	-79.00	≤-54	PASS
NTNV	2DH5	Ant1	2441	1000~13000	7626.73	-60.16	≤-47	PASS
NTNV	2DH5	Ant1	2480	30~1000	984.36	-78.97	≤-54	PASS
NTNV	2DH5	Ant1	2480	1000~13000	7767.14	-59.70	≤-47	PASS
NTNV	3DH5	Ant1	2402	30~1000	890.63	-79.23	≤-54	PASS
NTNV	3DH5	Ant1	2441	30~1000	80.44	-70.91	≤-54	PASS
NTNV	3DH5	Ant1	2441	1000~13000	1205.21	-68.59	≤-47	PASS
NTNV	3DH5	Ant1	2480	30~1000	310.94	-66.43	≤-54	PASS
NTNV	3DH5	Ant1	2480	1000~13000	6404.47	-76.82	≤-47	PASS


Test Graphs

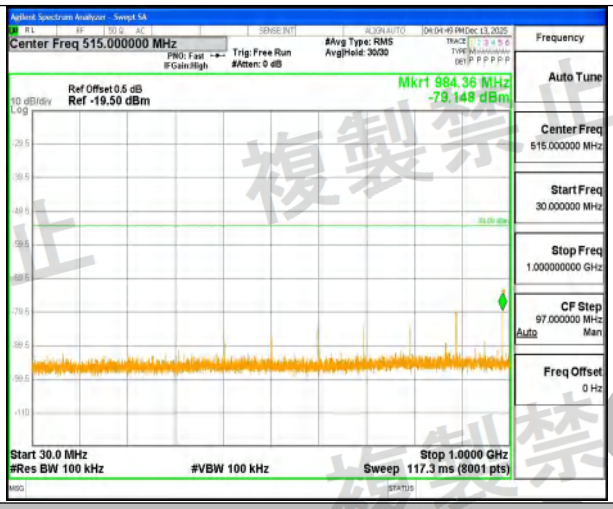


NTNV-DH5-Ant1-2402-30~1000-PASS

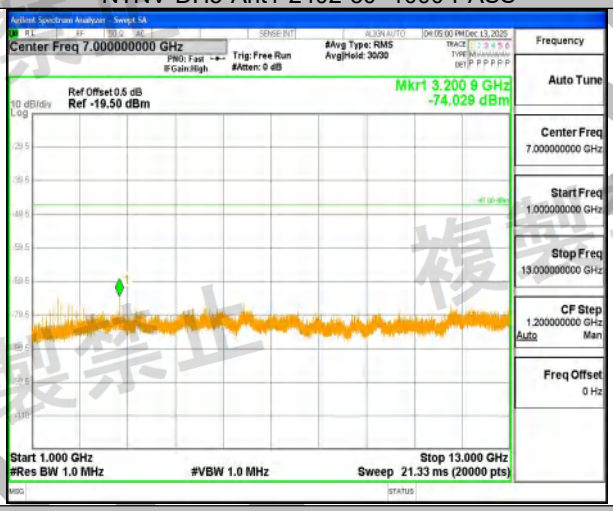


NTNV-DH5-Ant1-2402-1000~13000-PASS

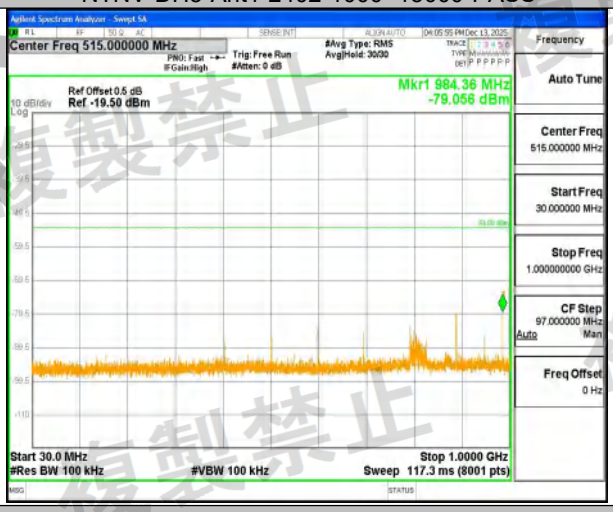


NTNV-DH5-Ant1-2441-30~1000-PASS

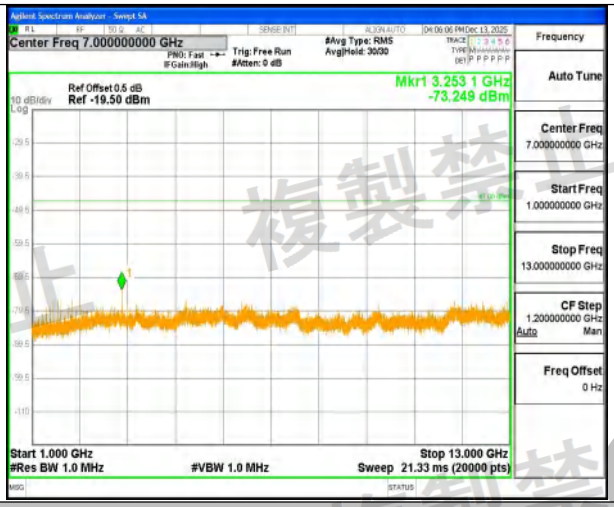


NTNV-DH5-Ant1-2441-1000~13000-PASS

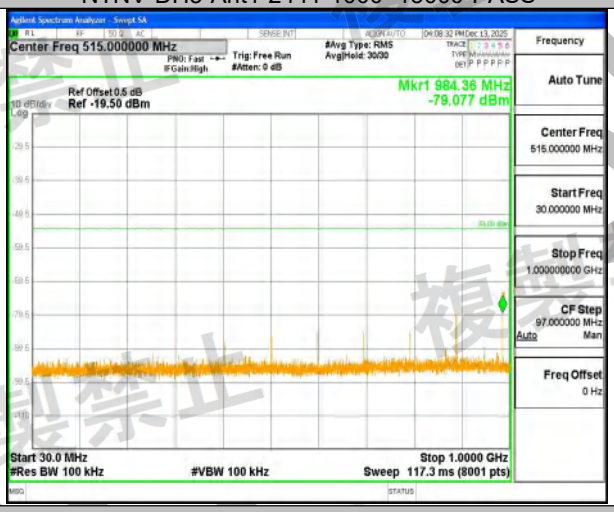


NTNV-DH5-Ant1-2480-30~1000-PASS

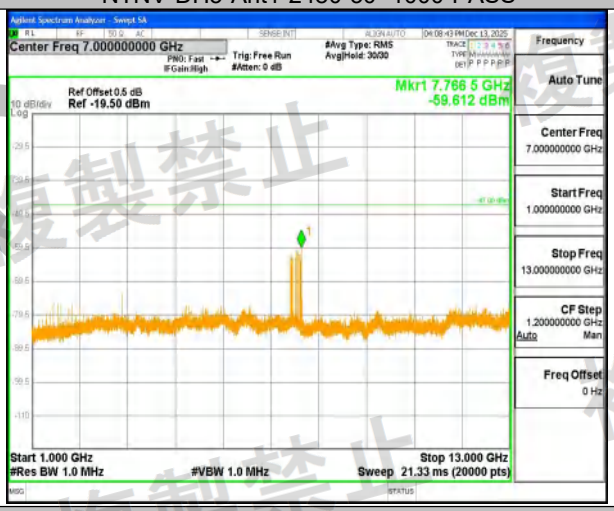


NTNV-DH5-Ant1-2480-1000~13000-PASS

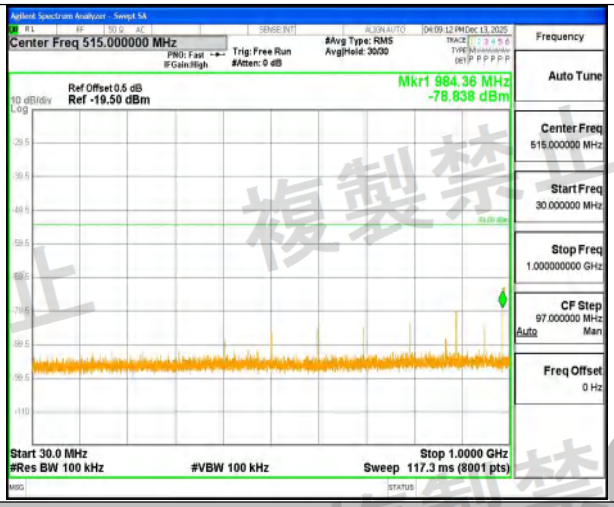


NTNV-2DH5-Ant1-2402-30~1000-PASS

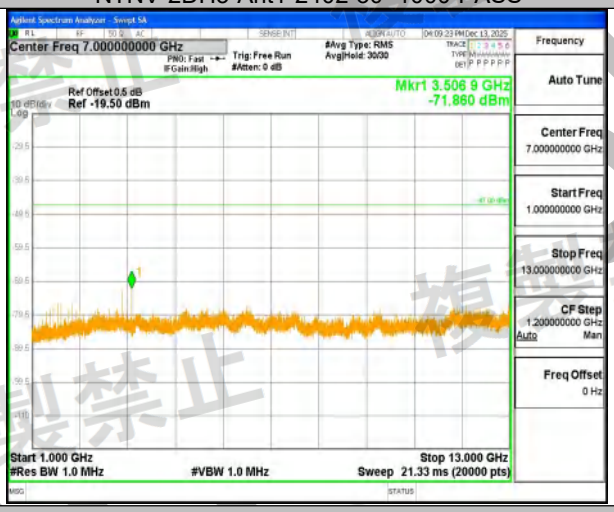


NTNV-2DH5-Ant1-2402-1000~13000-PASS

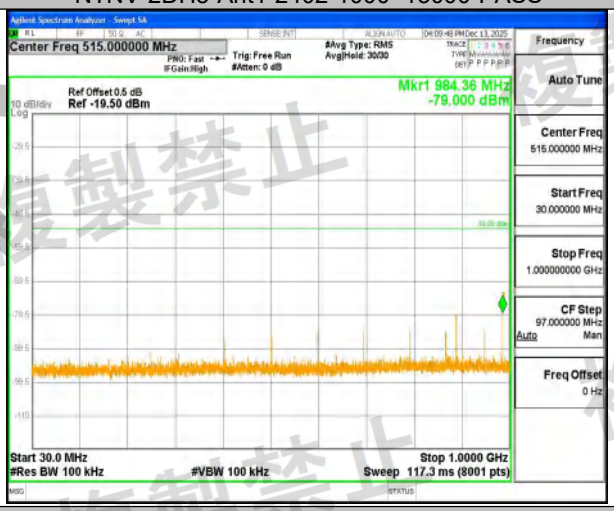


NTNV-2DH5-Ant1-2441-30~1000-PASS

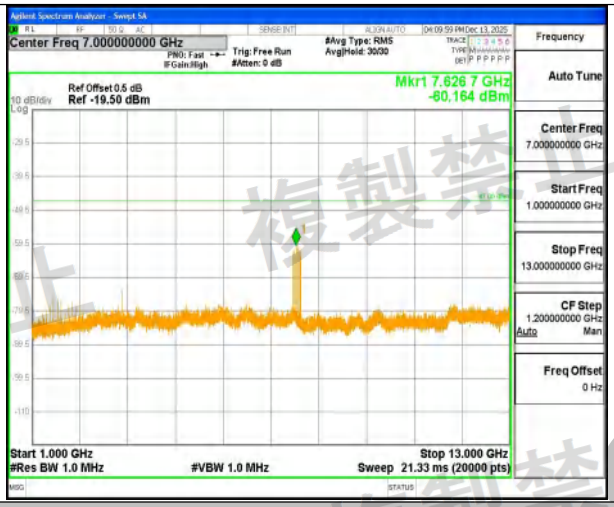


NTNV-2DH5-Ant1-2441-1000~13000-PASS

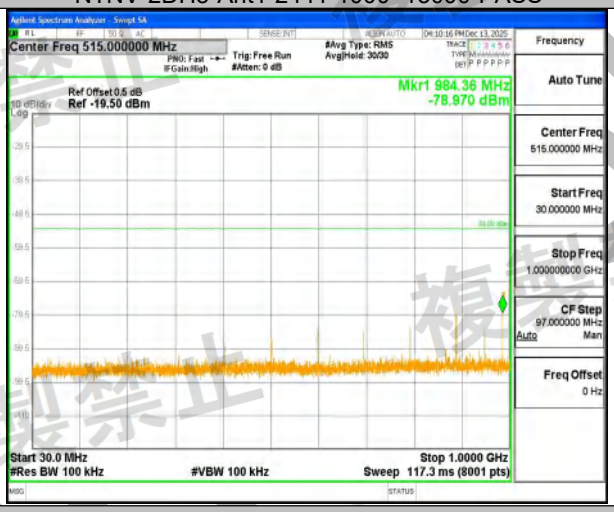


NTNV-2DH5-Ant1-2480-30~1000-PASS

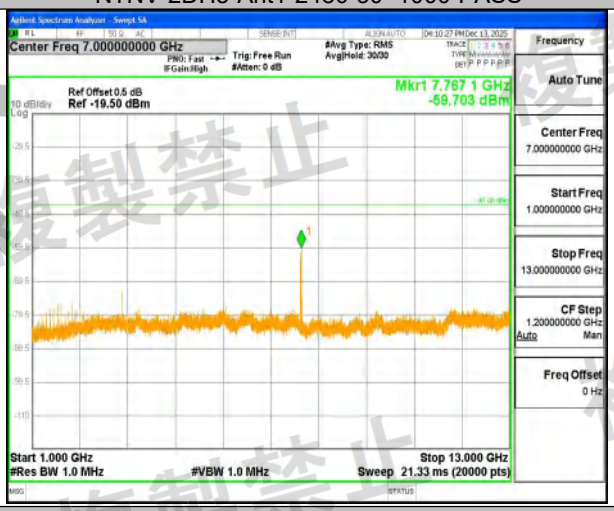


NTNV-2DH5-Ant1-2480-1000~13000-PASS

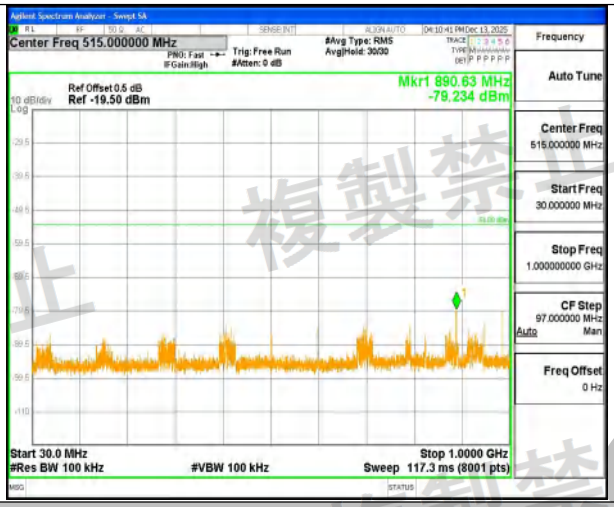


NTNV-3DH5-Ant1-2402-30~1000-PASS

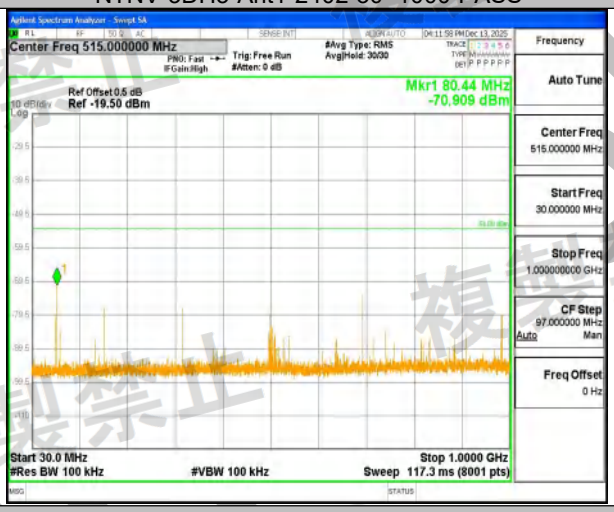


NTNV-3DH5-Ant1-2441-30~1000-PASS

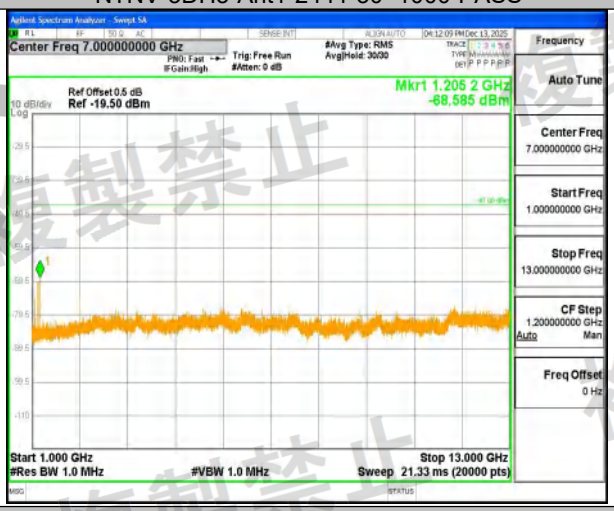

NTNV-3DH5-Ant1-2441-1000~13000-PASS

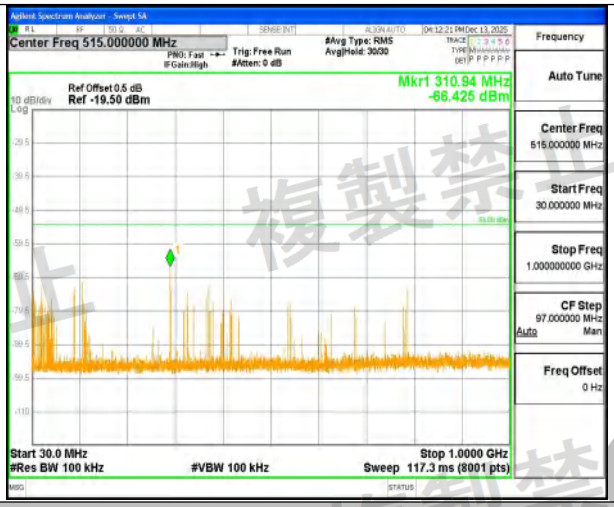


NTNV-3DH5-Ant1-2480-30~1000-PASS

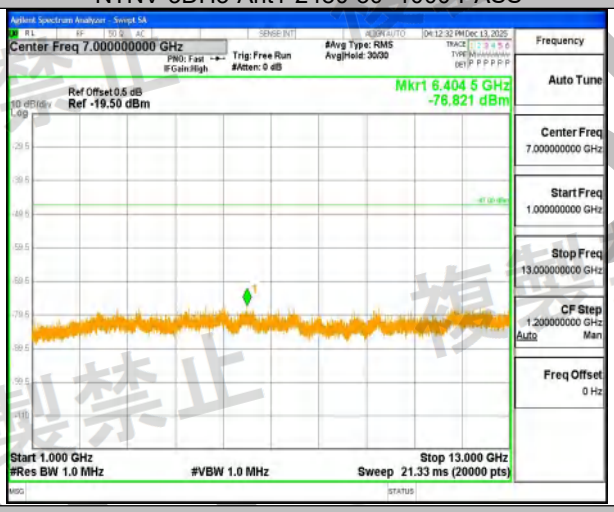

NTNV-3DH5-Ant1-2480-1000~13000-PASS

7 Test setup photo

RF TEST

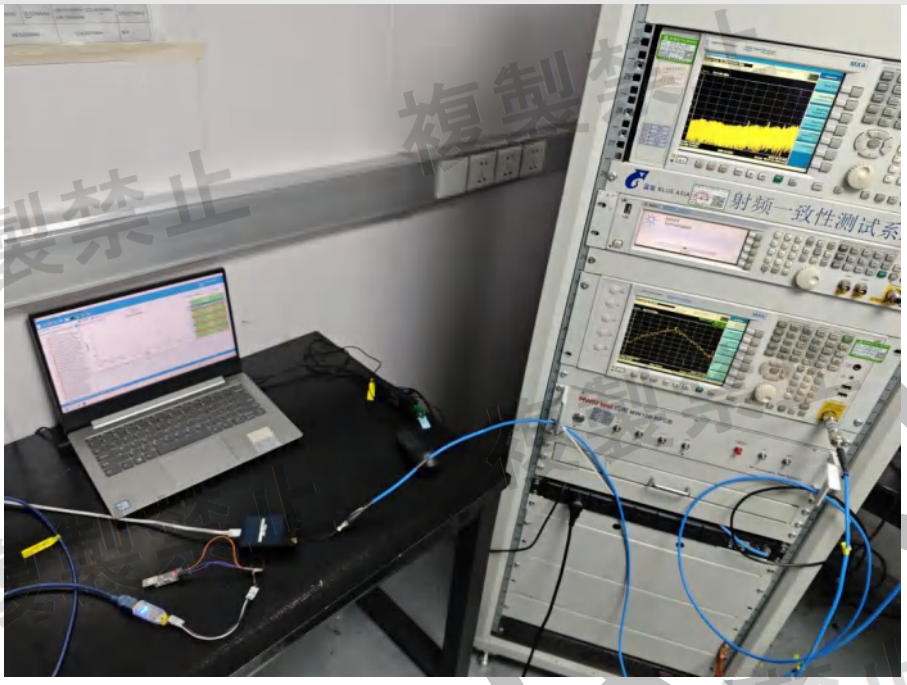


8 Photographs

8.1 EUT Constructional Details




View of Product-1

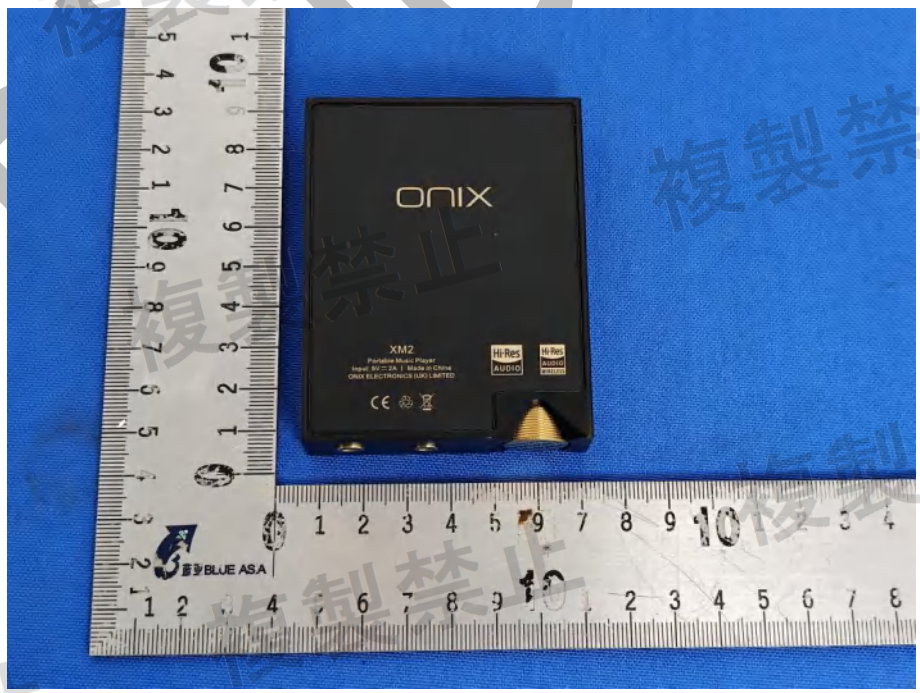


View of Product-2




View of Product-3

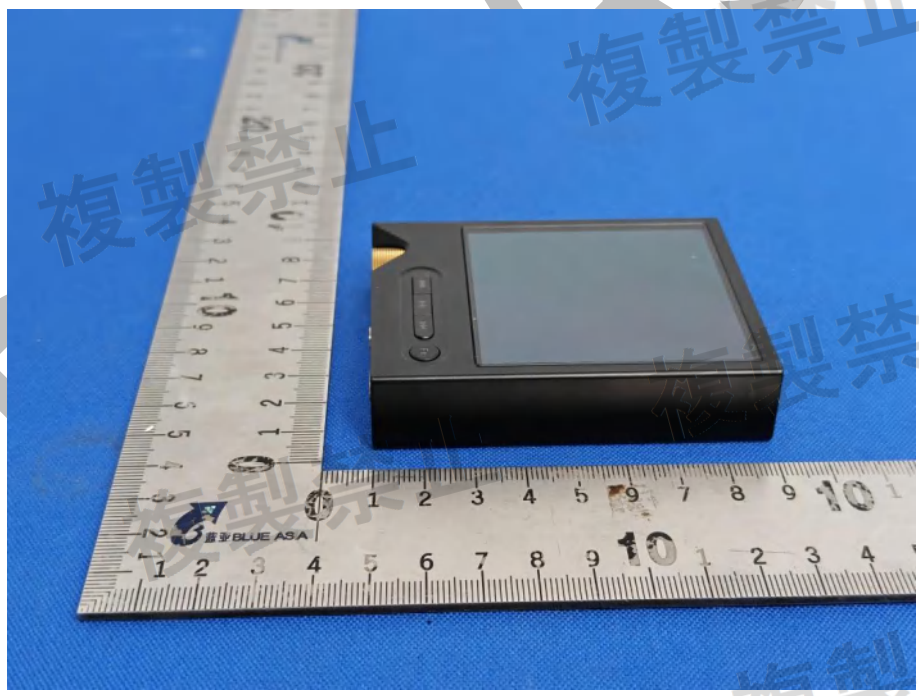


View of Product-4

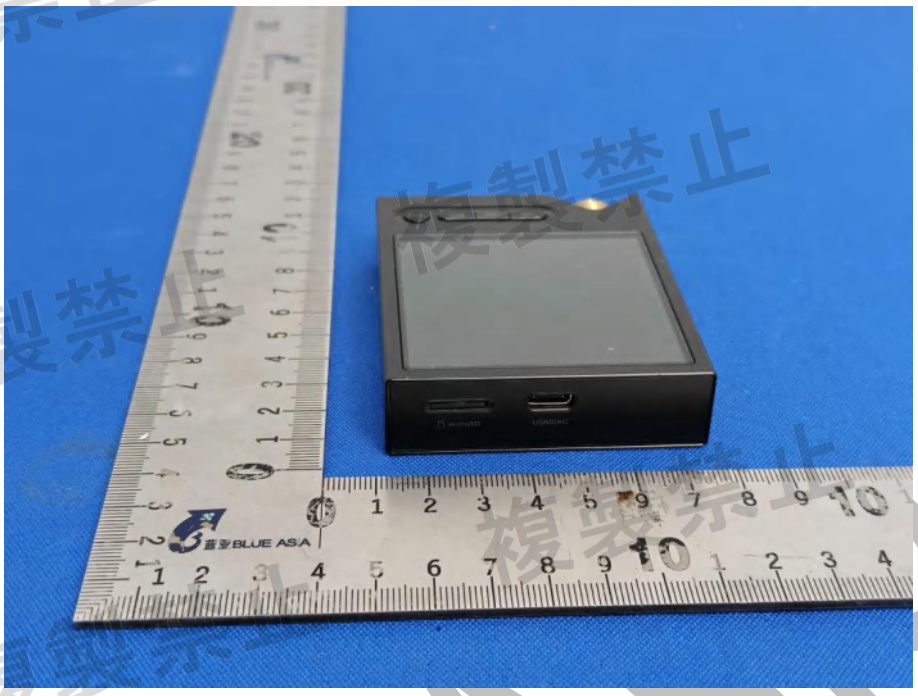

View of Product-5

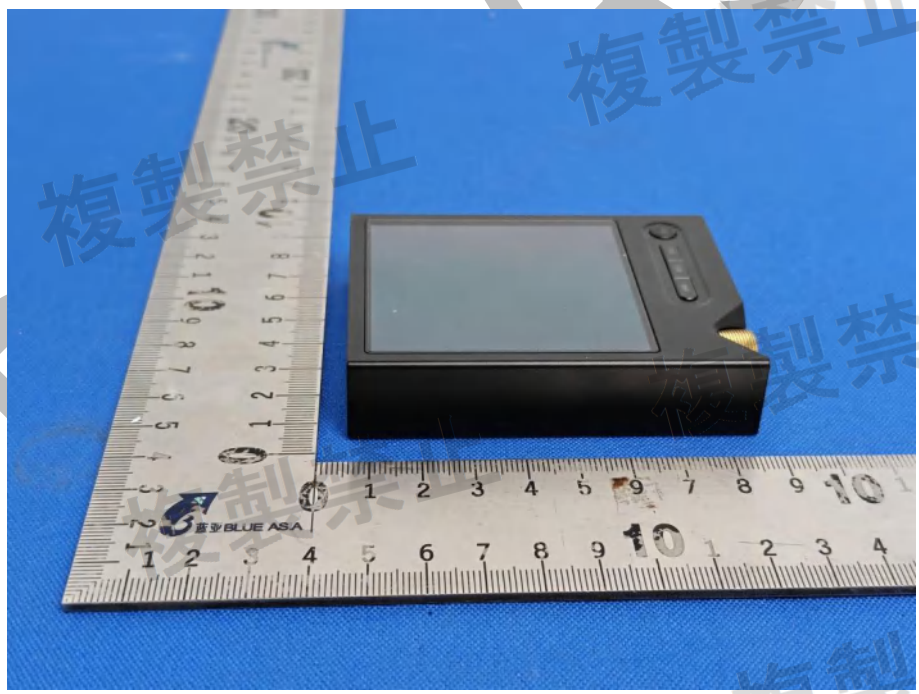


View of Product-6

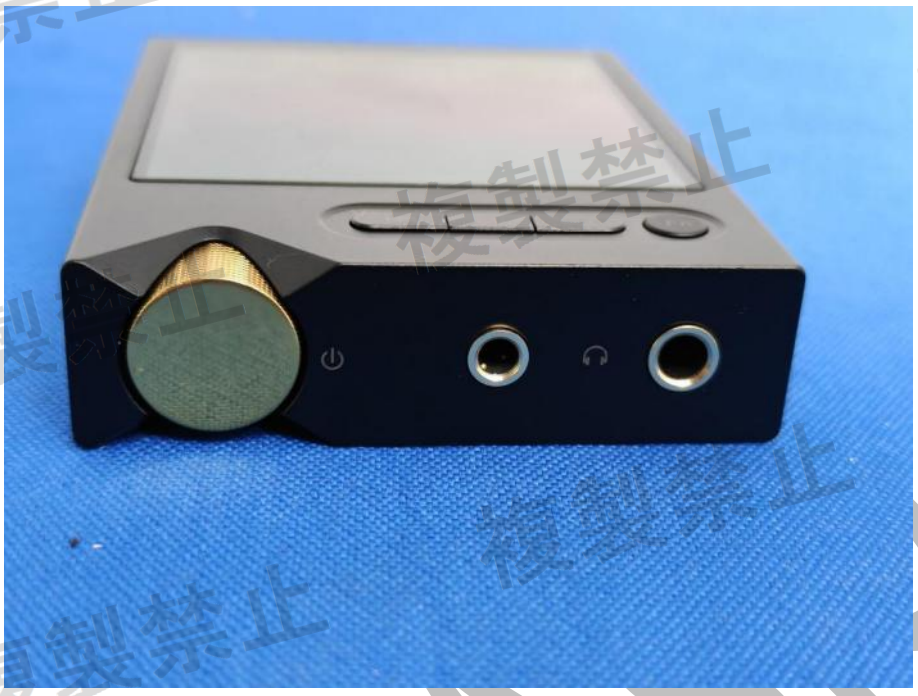


View of Product-7



View of Product-8

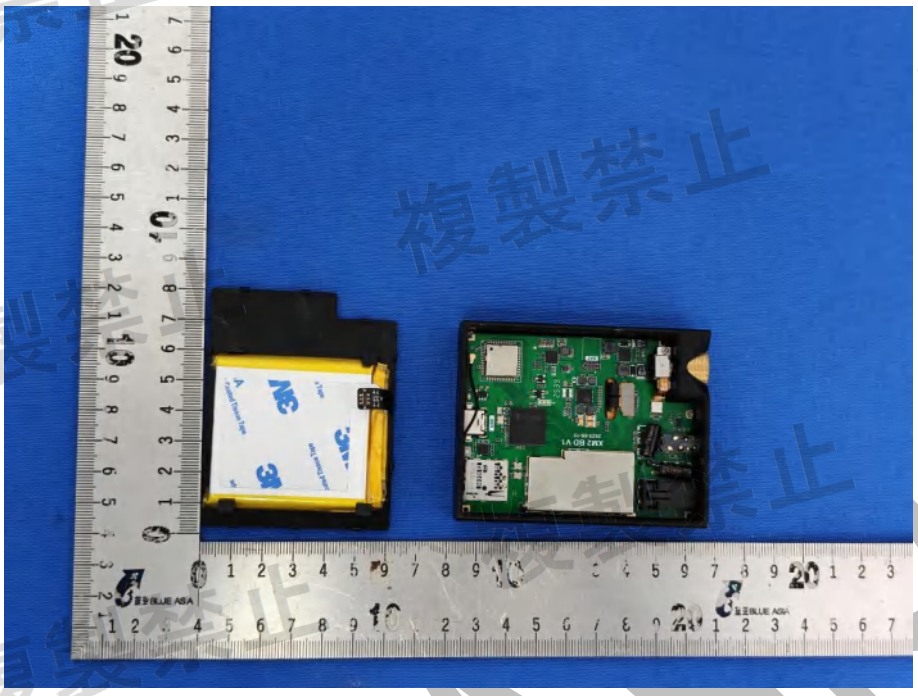


View of Product-9

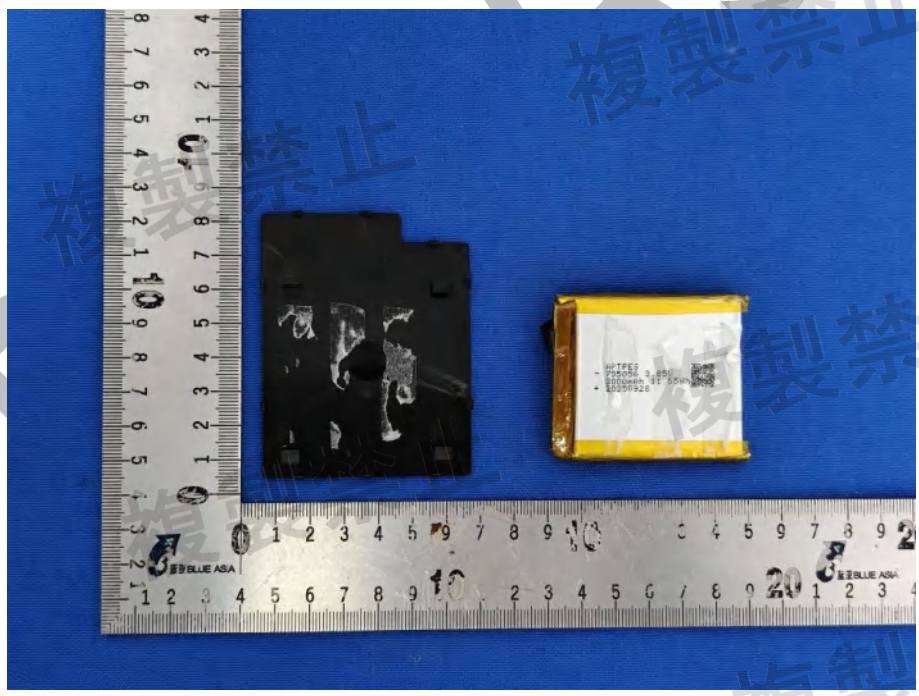


View of Product-10




View of Product-11

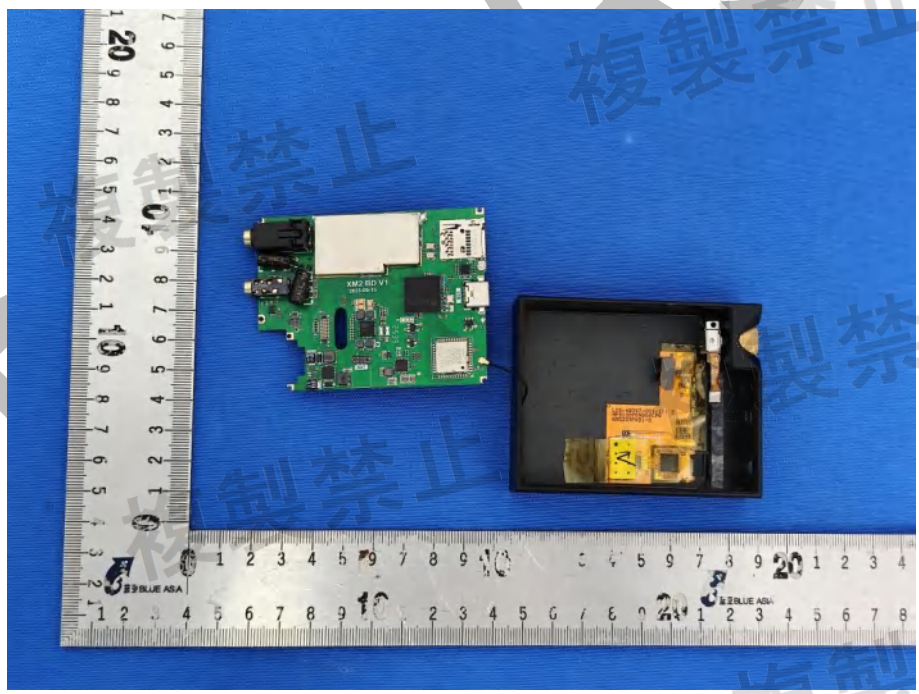


View of Product-12

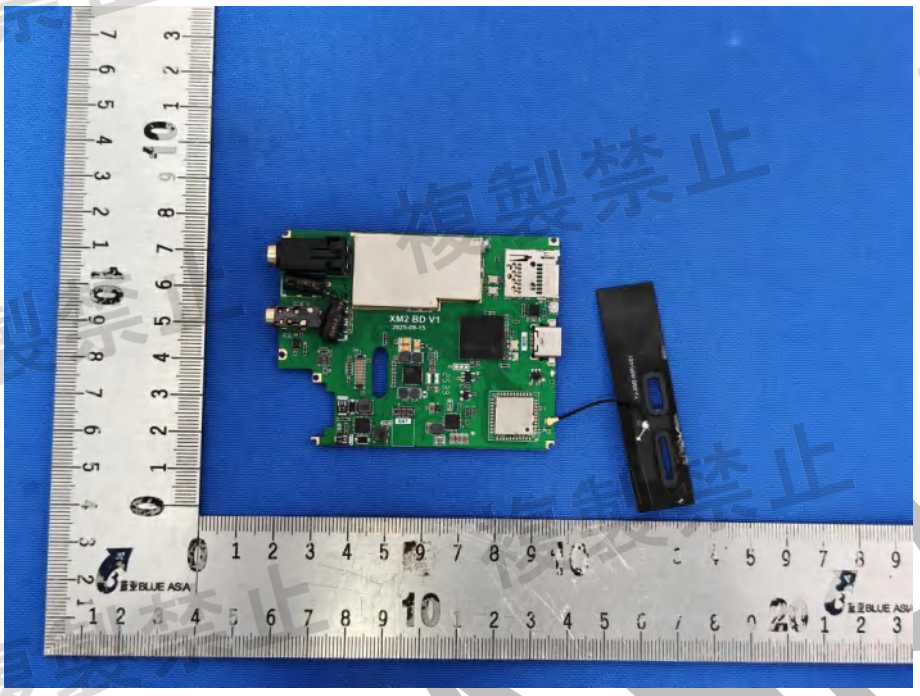


View of Product-13

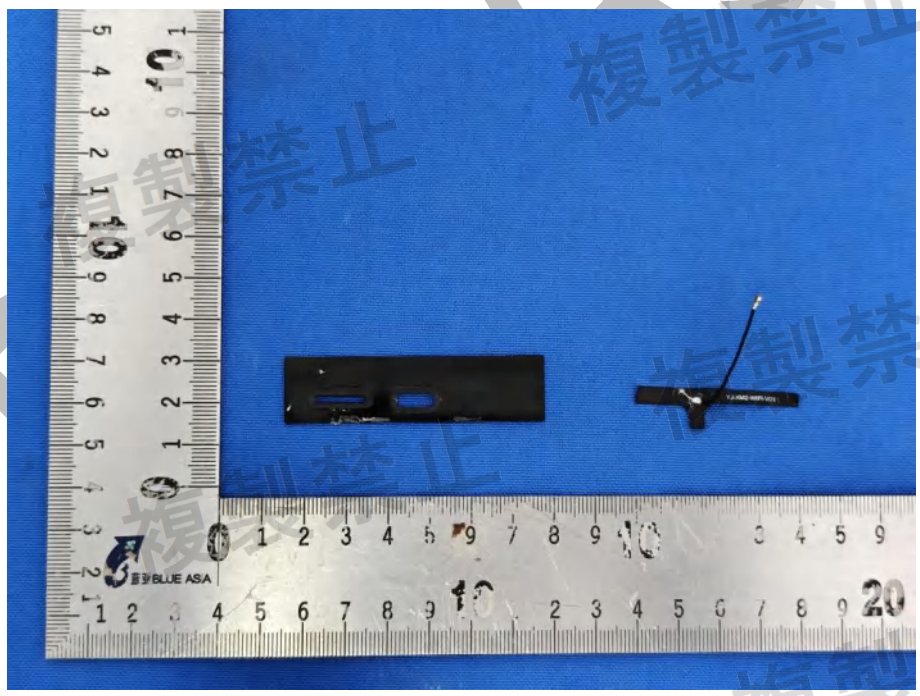


View of Product-14

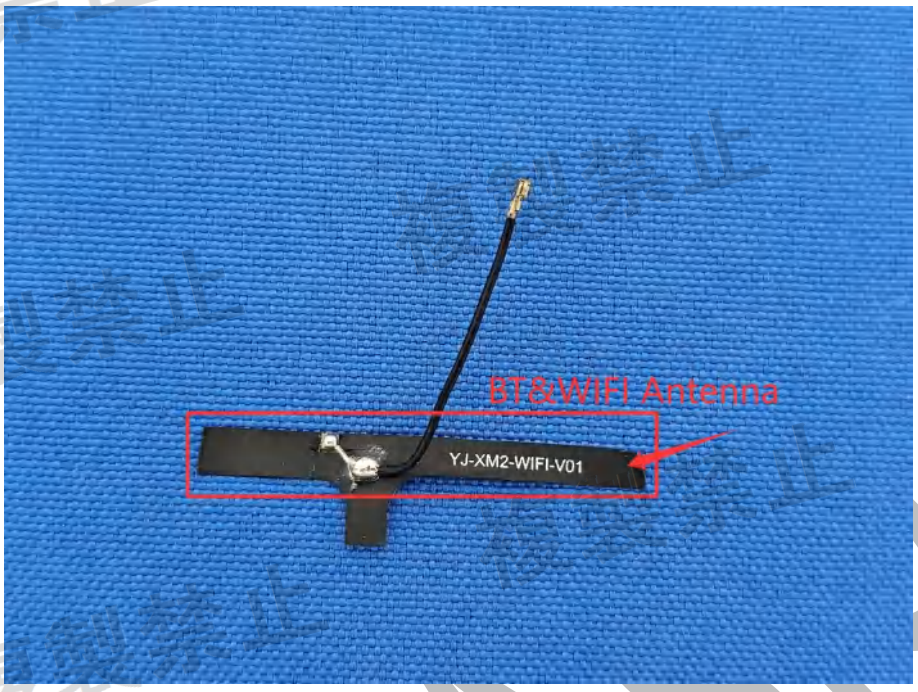


View of Product-15

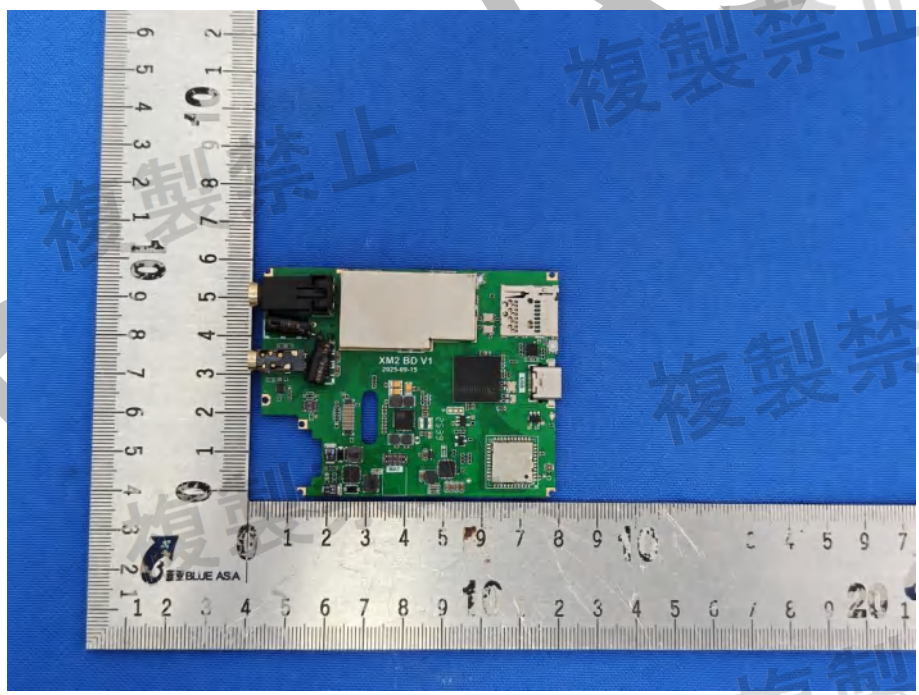

View of Product-16

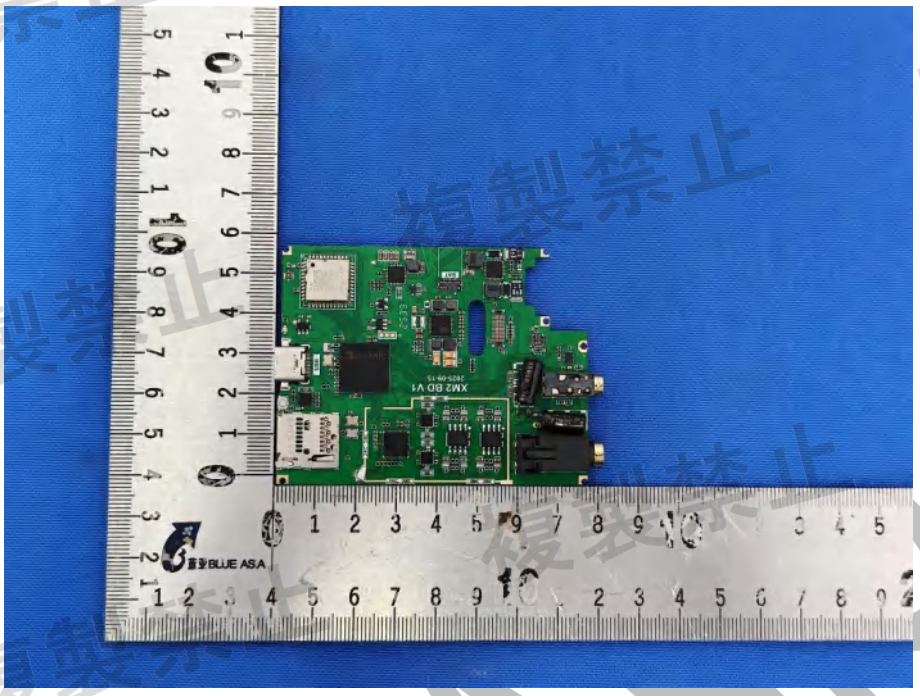

View of Product-17

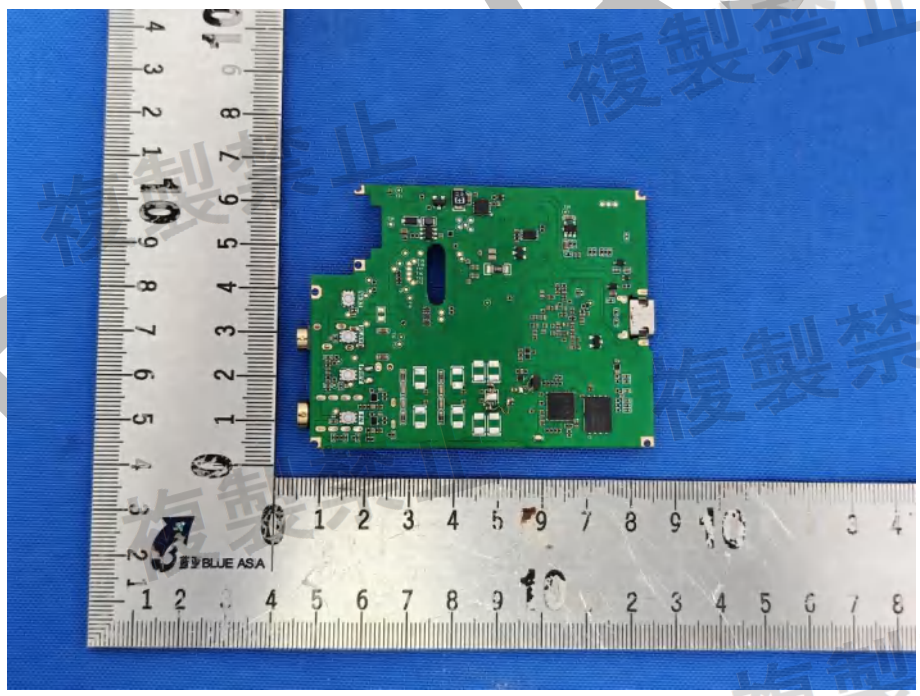


View of Product-18




View of Product-19



View of Product-20

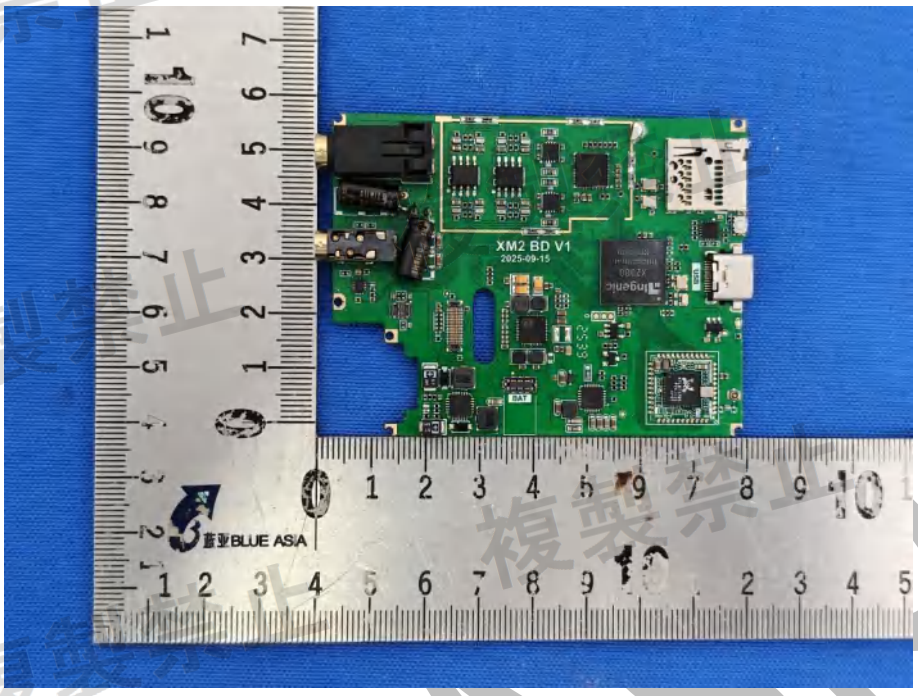

View of Product-21

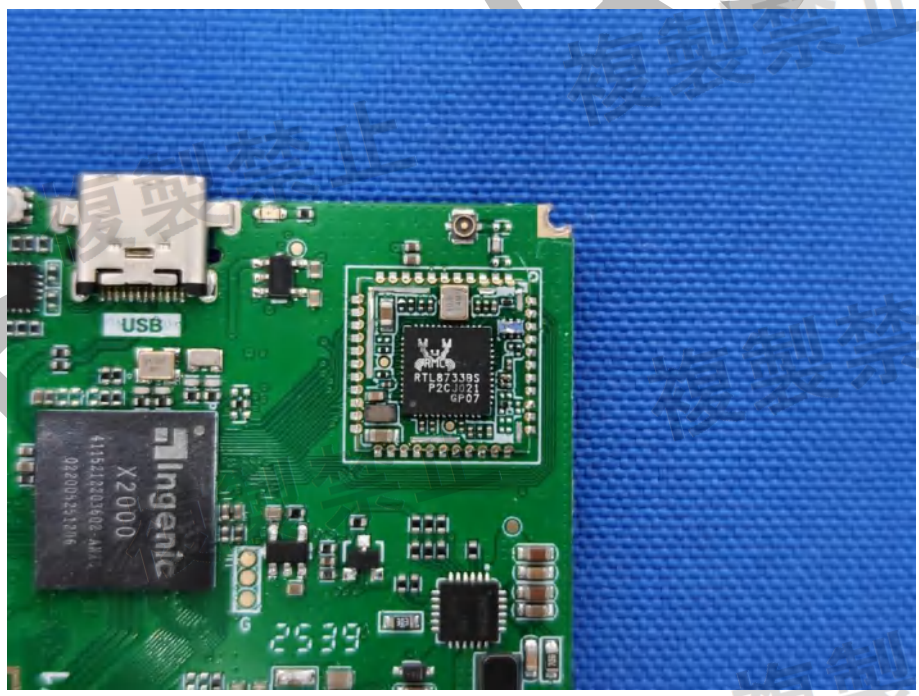

View of Product-22

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.