

Test Report No.50307265 001

## Appendix D: Radiated and Mains Spurious Emission Data


(File: 50307265 001 AppendixD)

## Contents

|                                                 |    |
|-------------------------------------------------|----|
| ANT.....                                        | 3  |
| Spurious Emissions, Band Edges, 2.35-2.5G ..... | 3  |
| Spurious Emissions, TX Mode, 1-18G.....         | 11 |
| Spurious Emissions, TX Mode, 18-26G.....        | 17 |
| Spurious Emissions, TX Mode, 30M-1G .....       | 23 |
| Spurious Emissions, TX Mode, 9k-30M .....       | 25 |
| Spurious Emissions, RX Mode, 1-18G .....        | 27 |
| Spurious Emissions, RX Mode, 18-26G.....        | 29 |
| Spurious Emissions, RX Mode, 30M-1G .....       | 31 |
| Spurious Emissions, RX Mode, 9K-30M .....       | 33 |
| BLE .....                                       | 35 |
| Spurious Emissions, Band Edges, 2.35-2.5G ..... | 35 |
| Spurious Emissions, TX Mode, 1-18G.....         | 43 |
| Spurious Emissions, TX Mode, 18-26G.....        | 49 |
| Spurious Emissions, TX Mode, 30M-1G .....       | 55 |
| Spurious Emissions, TX Mode, 9k-30M .....       | 57 |
| Spurious Emissions, RX Mode, 1-18G .....        | 59 |
| Spurious Emissions, RX Mode, 18-26G.....        | 61 |
| Spurious Emissions, RX Mode, 30M-1G .....       | 63 |
| Spurious Emissions, RX Mode, 9K-30M .....       | 65 |
| Mains .....                                     | 67 |


**Spurious Emissions, Band Edges, 2.35-2.5G**

TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

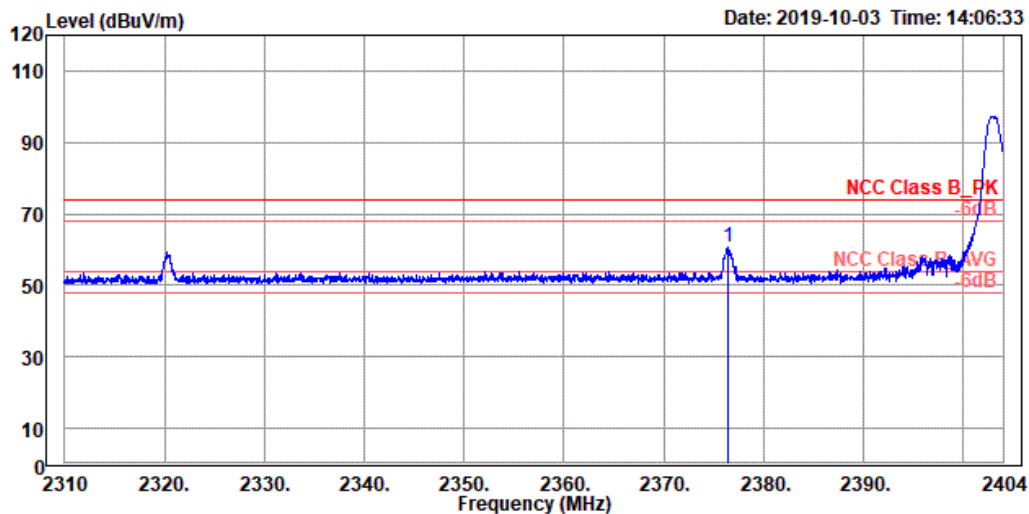


Site : 3m Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2403MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark |
|---|----------|--------|---------------|--------|---------------|---------------|------|------|--------|
|   | MHz      | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |        |
| 1 | 2376.395 | 60.53  | 23.14         | 37.39  | 74.00         | -13.47        | 100  | 196  | Peak   |

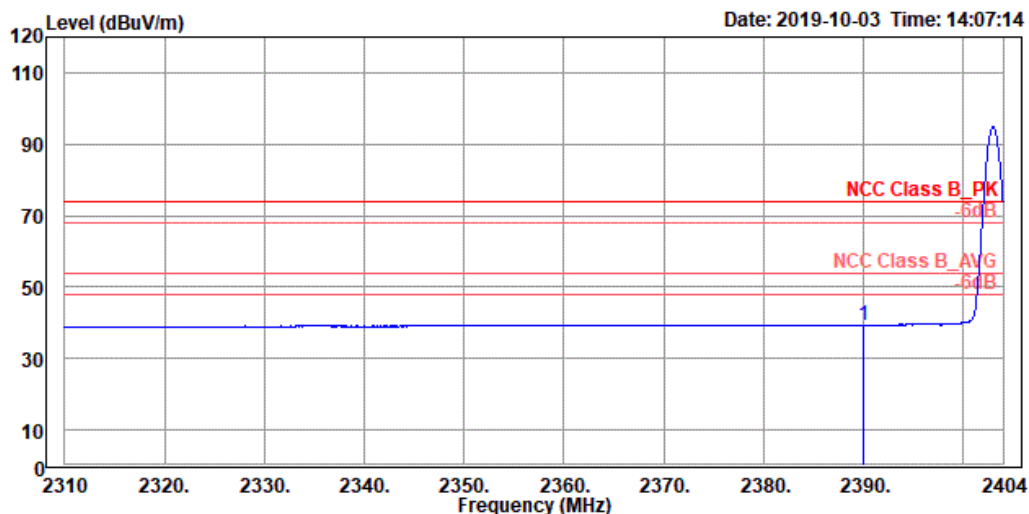


Site : 3m Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2403MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 2389.994 | 39.39  | 1.96       | 37.43  | 54.00      | -14.61     | 100  | 196  | Average |

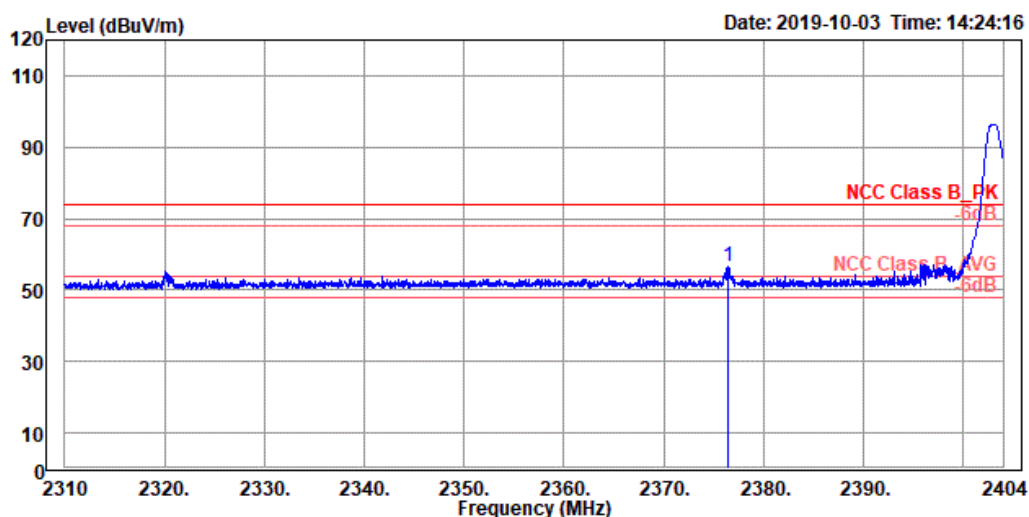


Site : 3m Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2403MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 2376.427 | 56.73  | 19.34      | 37.39  | 74.00      | -17.27     | 388  | 349  | Peak   |

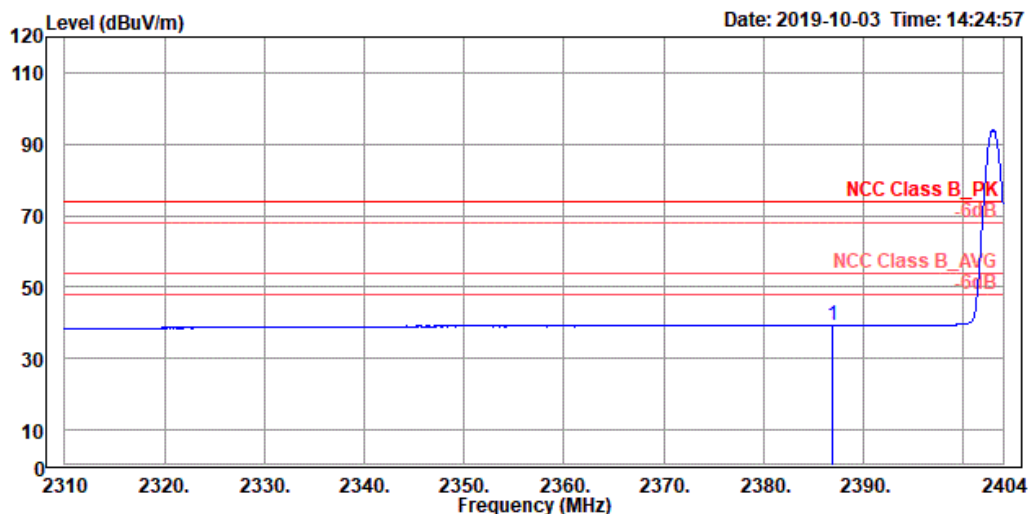


Site : 3m Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2403MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 2386.986 | 39.20  | 1.78       | 37.42  | 54.00      | -14.80     | 388  | 349  | Average |

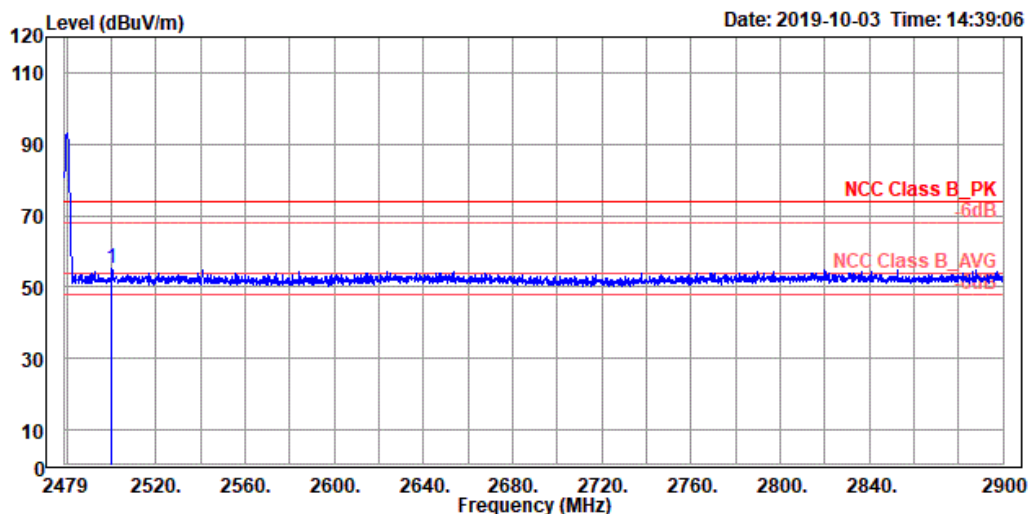


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2480MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 2500.050 | 54.99  | 17.21      | 37.78  | 74.00      | -19.01     | 198  | 221  | Peak   |

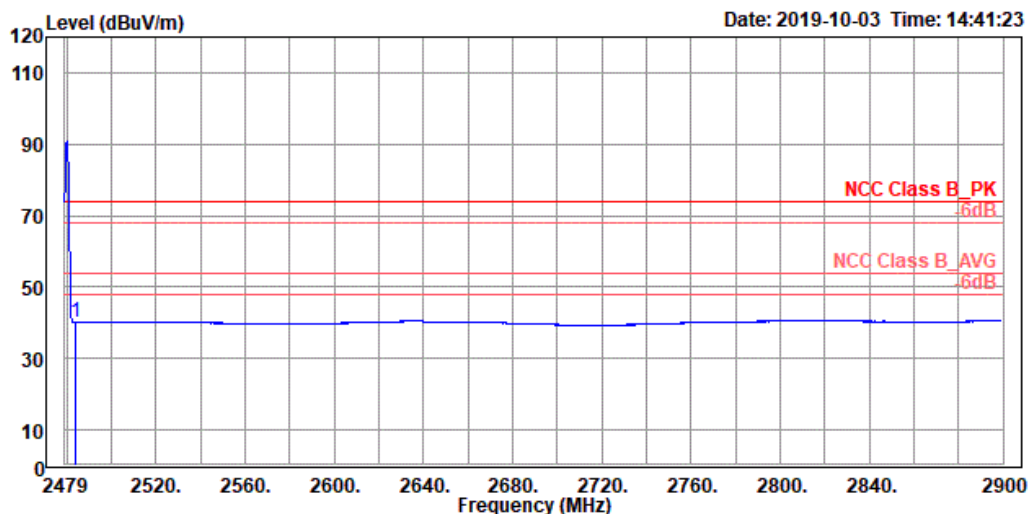


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2480MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 2483.912 | 40.14  | 2.38       | 37.76  | 54.00      | -13.86     | 198  | 221  | Average |

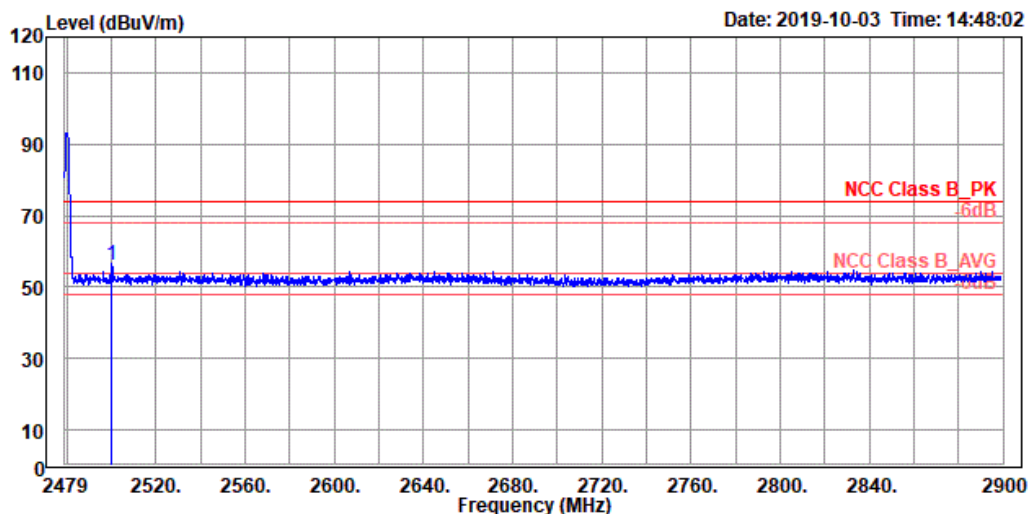

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2480MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 2499.769 | 56.16  | 18.38      | 37.78  | 74.00      | -17.84     | 100  | 187  | Peak   |

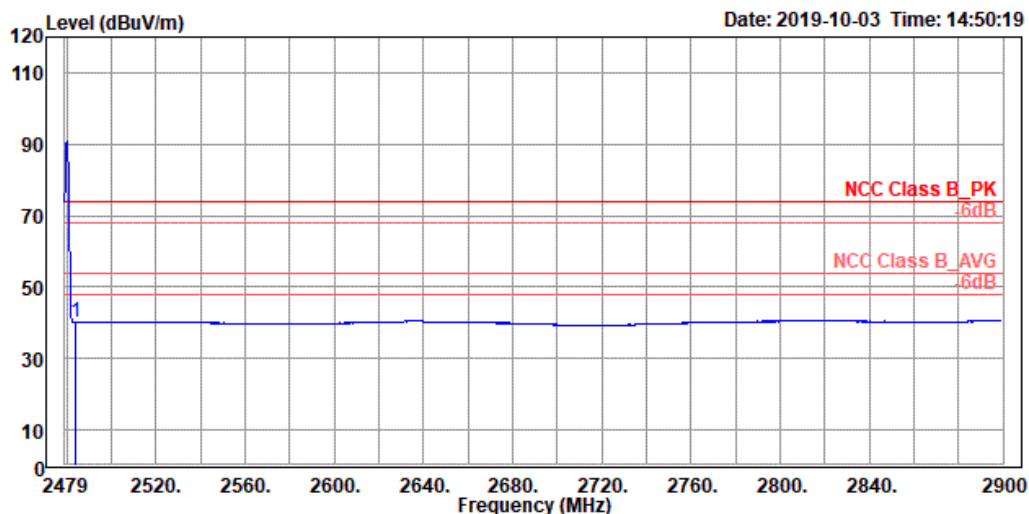


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2480MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 2483.631 | 40.17  | 2.41       | 37.76  | 54.00      | -13.83     | 100  | 187  | Average |

# Spurious Emissions, TX Mode, 1-18G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

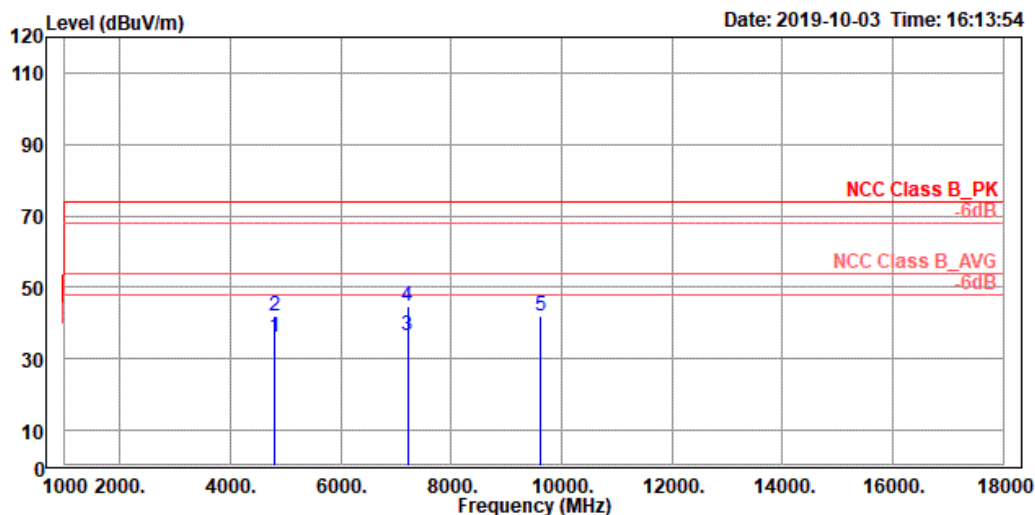


Site : 3m Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2403MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4806.000 | 36.19  | 46.20      | -10.01 | 54.00      | -17.81     | 100  | 75   | Average |
| 2 | 4806.000 | 41.86  | 51.87      | -10.01 | 74.00      | -32.14     | 100  | 75   | Peak    |
| 3 | 7209.000 | 36.37  | 44.11      | -7.74  | 54.00      | -17.63     | 200  | 146  | Average |
| 4 | 7209.000 | 44.64  | 52.38      | -7.74  | 74.00      | -29.36     | 200  | 146  | Peak    |
| 5 | 9612.000 | 42.00  | 47.27      | -5.27  | 74.00      | -32.00     | 318  | 360  | Peak    |

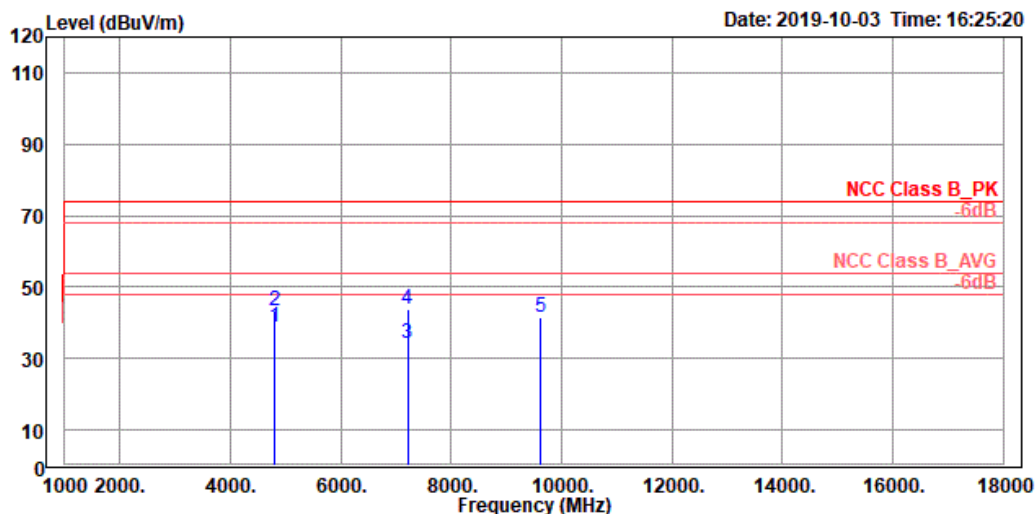


Site : 3m Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2403MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4806.000 | 38.67  | 48.68      | -10.01 | 54.00      | -15.33     | 200  | 207  | Average |
| 2 | 4806.000 | 43.20  | 53.21      | -10.01 | 74.00      | -30.80     | 200  | 207  | Peak    |
| 3 | 7209.000 | 34.02  | 41.76      | -7.74  | 54.00      | -19.98     | 100  | 184  | Average |
| 4 | 7209.000 | 43.97  | 51.71      | -7.74  | 74.00      | -30.03     | 100  | 184  | Peak    |
| 5 | 9612.000 | 41.34  | 46.61      | -5.27  | 74.00      | -32.66     | 400  | 170  | Peak    |

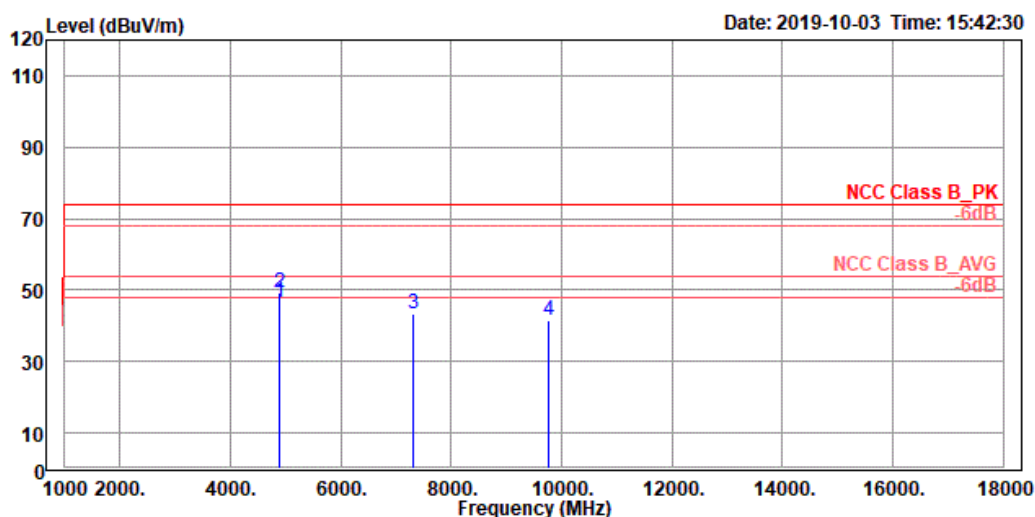


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2442MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4884.000 | 46.51  | 56.56      | -10.05 | 54.00      | -7.49      | 200  | 208  | Average |
| 2 | 4884.000 | 49.41  | 59.46      | -10.05 | 74.00      | -24.59     | 200  | 208  | Peak    |
| 3 | 7326.000 | 43.42  | 51.16      | -7.74  | 74.00      | -30.58     | 200  | 182  | Peak    |
| 4 | 9768.000 | 41.63  | 46.58      | -4.95  | 74.00      | -32.37     | 108  | 360  | Peak    |

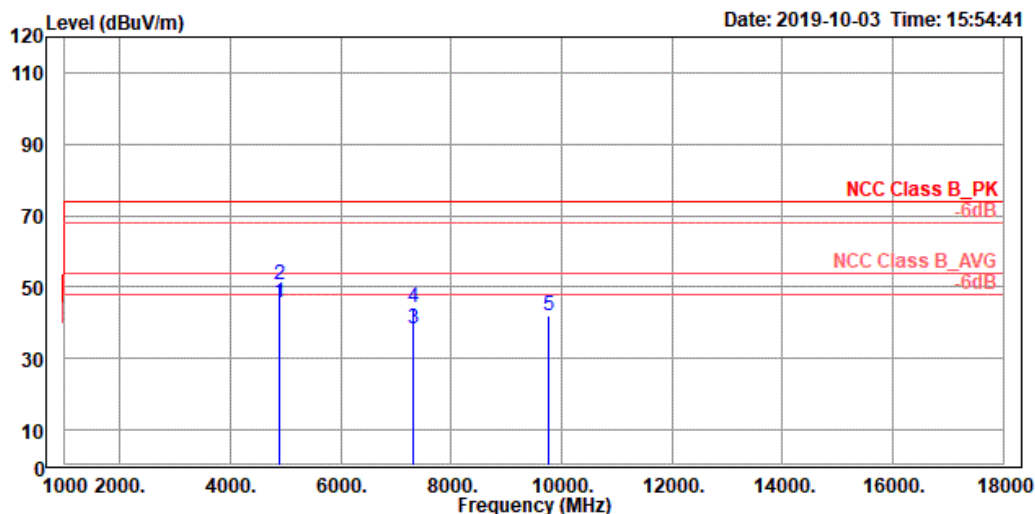


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2442MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4884.000 | 45.62  | 55.67      | -10.05 | 54.00      | -8.38      | 318  | 148  | Average |
| 2 | 4884.000 | 50.54  | 60.59      | -10.05 | 74.00      | -23.46     | 318  | 148  | Peak    |
| 3 | 7326.000 | 38.27  | 46.01      | -7.74  | 54.00      | -15.73     | 300  | 188  | Average |
| 4 | 7326.000 | 44.44  | 52.18      | -7.74  | 74.00      | -29.56     | 300  | 188  | Peak    |
| 5 | 9768.000 | 41.93  | 46.88      | -4.95  | 74.00      | -32.07     | 100  | 101  | Peak    |

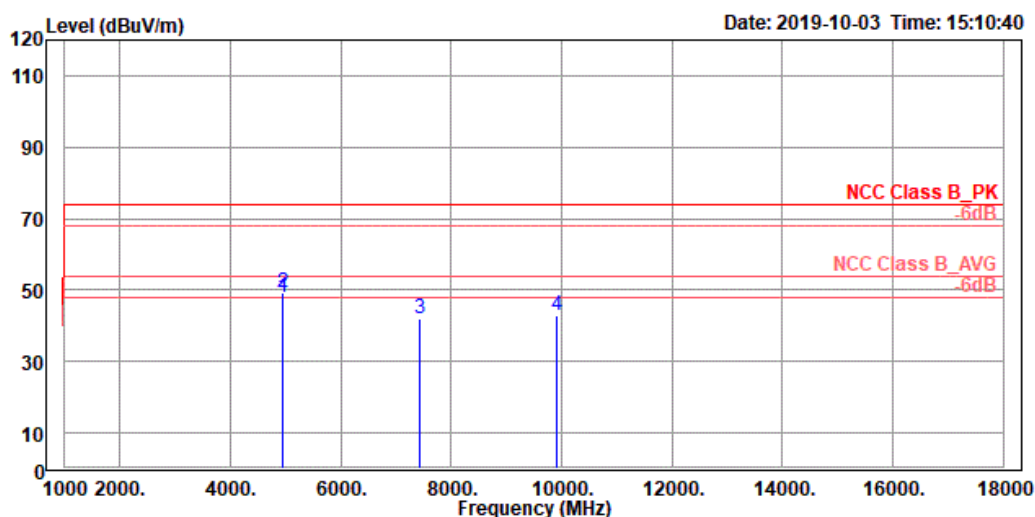

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2480MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4960.000 | 47.71  | 57.71      | -10.00 | 54.00      | -6.29      | 300  | 146  | Average |
| 2 | 4960.000 | 49.16  | 59.16      | -10.00 | 74.00      | -24.84     | 300  | 146  | Peak    |
| 3 | 7440.000 | 41.98  | 49.64      | -7.66  | 74.00      | -32.02     | 400  | 179  | Peak    |
| 4 | 9920.000 | 42.93  | 47.55      | -4.62  | 74.00      | -31.07     | 100  | 129  | Peak    |

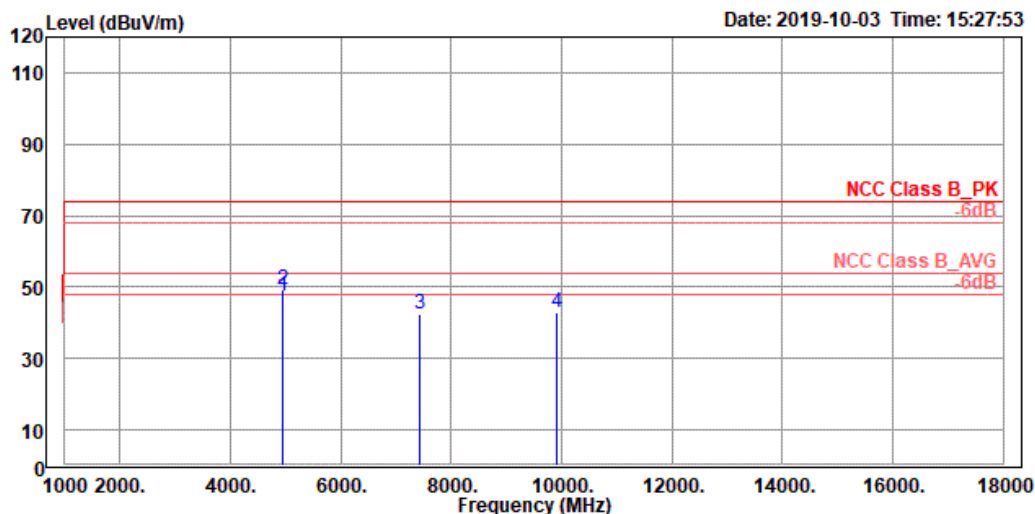


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2480MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4960.000 | 47.65  | 57.65      | -10.00 | 54.00      | -6.35      | 200  | 212  | Average |
| 2 | 4960.000 | 49.07  | 59.07      | -10.00 | 74.00      | -24.93     | 200  | 212  | Peak    |
| 3 | 7440.000 | 42.37  | 50.03      | -7.66  | 74.00      | -31.63     | 200  | 252  | Peak    |
| 4 | 9920.000 | 42.75  | 47.37      | -4.62  | 74.00      | -31.25     | 191  | 360  | Peak    |

# Spurious Emissions, TX Mode, 18-26G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

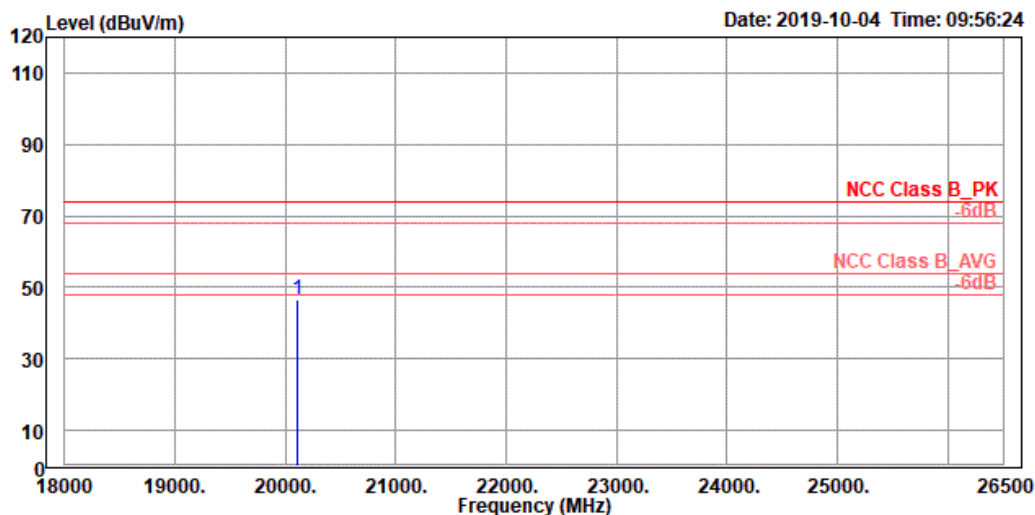


Site : 3m Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2403MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 20101.390 | 46.69  | 47.69      | -1.00  | 74.00      | -27.31     | 100  | 169  | Peak   |

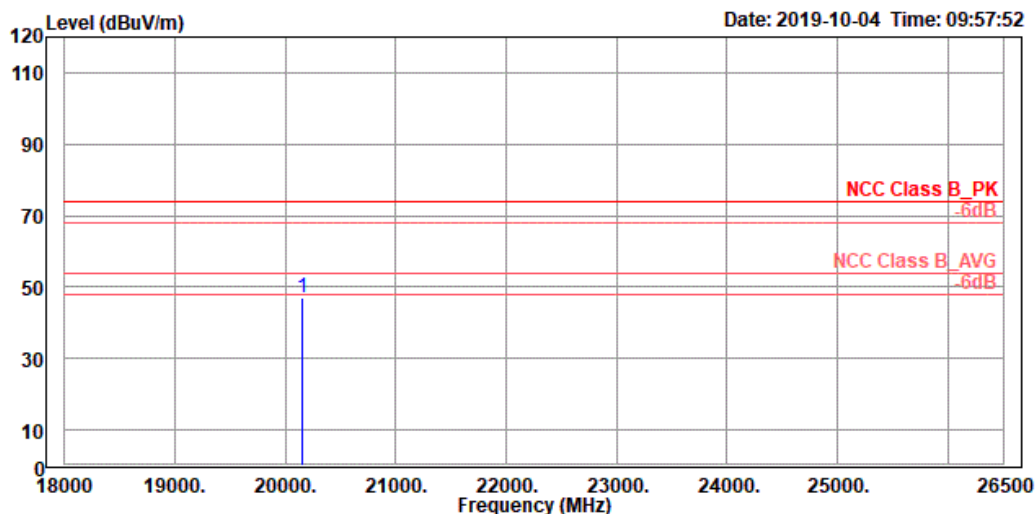


Site : 3m Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2403MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 20157.110 | 47.12  | 48.06      | -0.94  | 74.00      | -26.88     | 100  | 174  | Peak   |

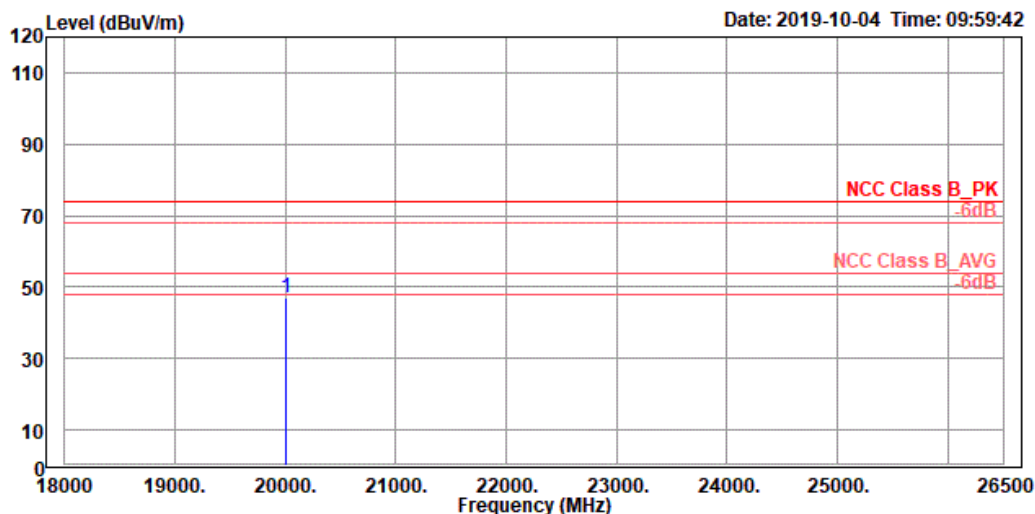


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2442MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 20006.000 | 46.87  | 47.98      | -1.11  | 74.00      | -27.13     | 100  | 135  | Peak   |

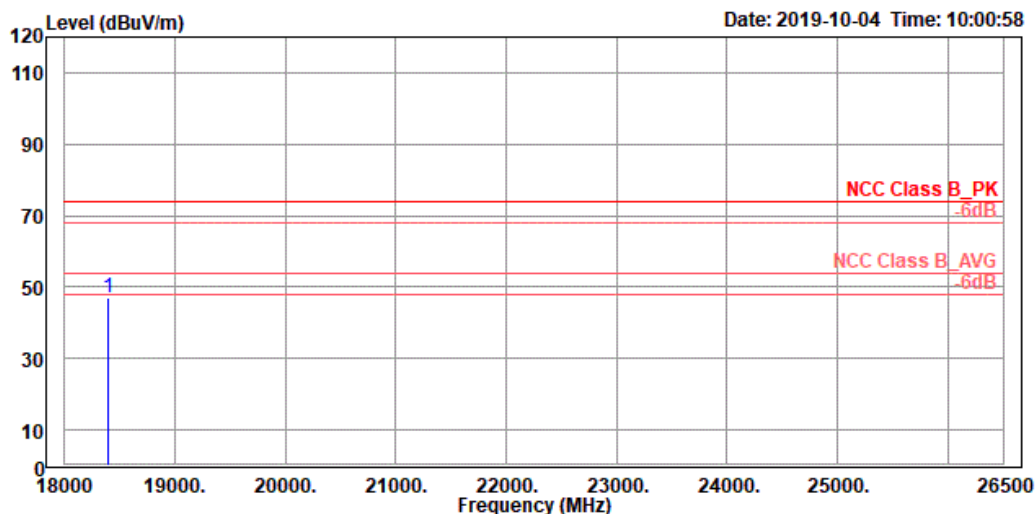


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2442MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 18391.950 | 46.89  | 49.09      | -2.20  | 74.00      | -27.11     | 100  | 42   | Peak   |

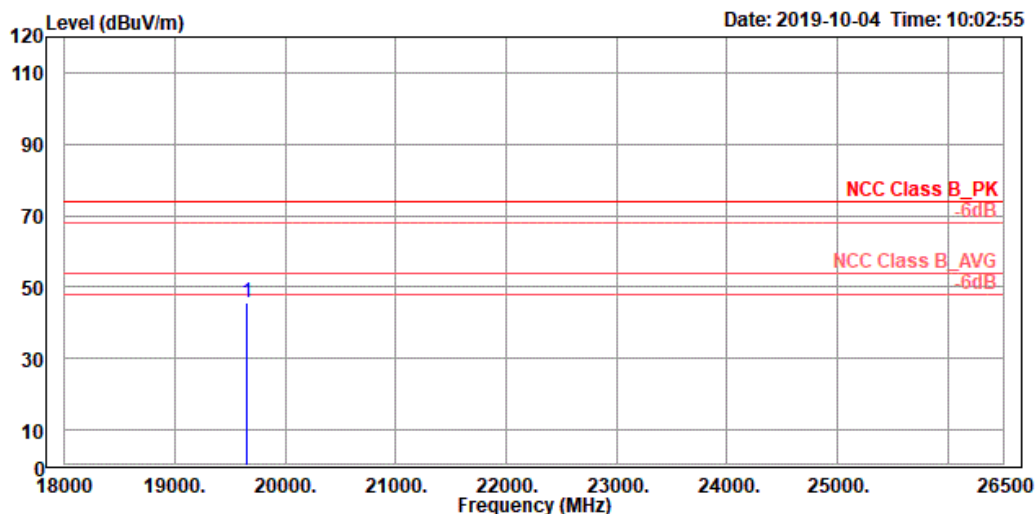

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2480MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 19648.050 | 45.50  | 47.04      | -1.54  | 74.00      | -28.50     | 100  | 210  | Peak   |

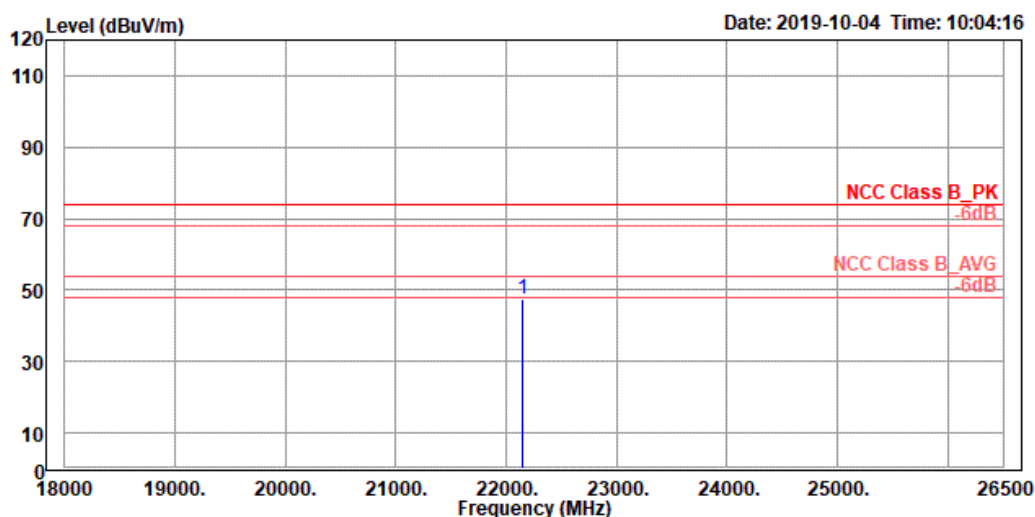


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2480MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 22142.330 | 47.46  | 46.00      | 1.46   | 74.00      | -26.54     | 100  | 32   | Peak   |

## Spurious Emissions, TX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

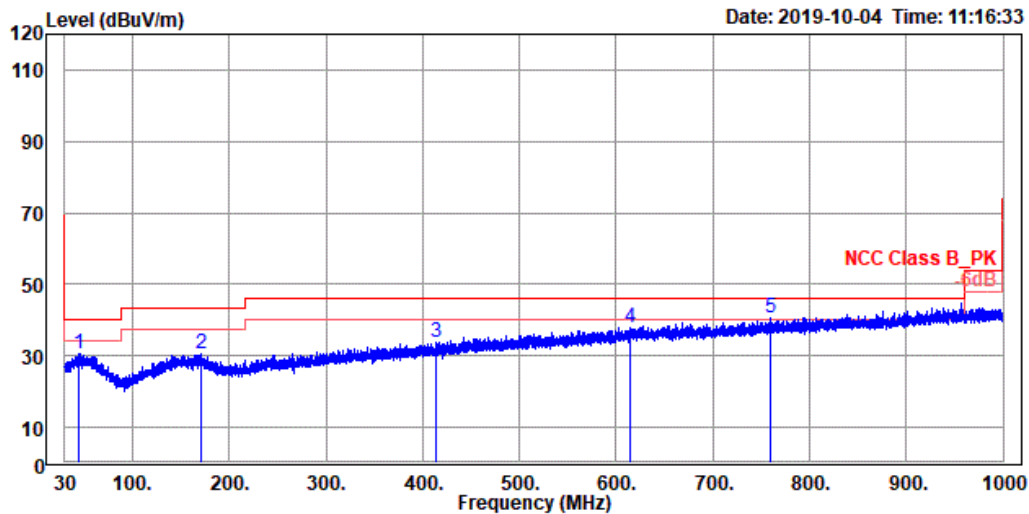

Site : 3m\_Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2442MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1   | 44.065  | 30.45  | 38.05      | -7.60  | 40.00      | -9.55      | 114  | 360  | QP     |
| 2   | 171.426 | 30.74  | 38.12      | -7.38  | 43.50      | -12.76     | 200  | 42   | QP     |
| 3   | 413.635 | 33.85  | 38.28      | -4.43  | 46.00      | -12.15     | 200  | 360  | QP     |
| 4   | 614.716 | 38.05  | 38.95      | -0.90  | 46.00      | -7.95      | 100  | 143  | QP     |
| 5 ! | 760.410 | 40.55  | 39.24      | 1.31   | 46.00      | -5.45      | 100  | 277  | QP     |

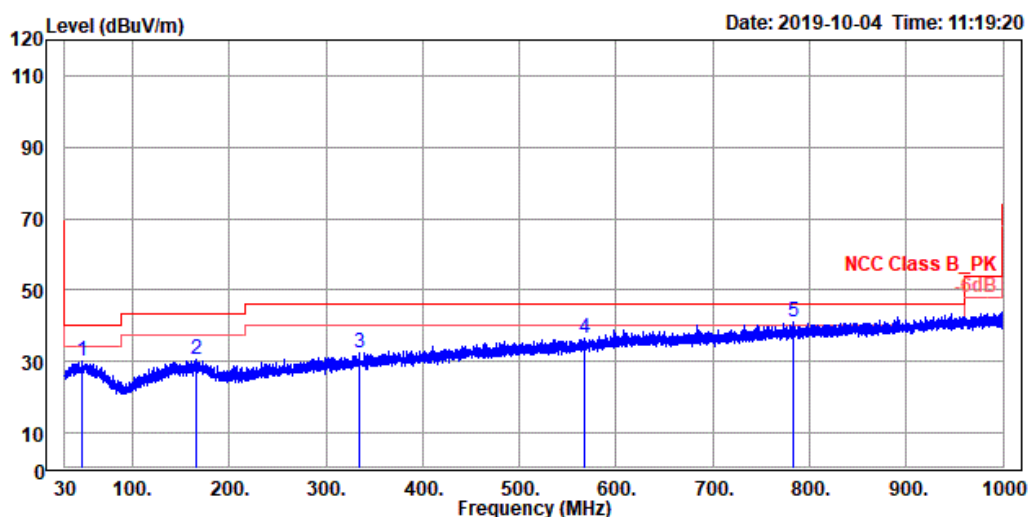


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2442MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|     | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|-----|---------|--------|------------|--------|------------|------------|------|------|--------|
|     | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1   | 47.751  | 29.90  | 37.43      | -7.53  | 40.00      | -10.10     | 200  | 214  | QP     |
| 2   | 165.218 | 30.76  | 38.03      | -7.27  | 43.50      | -12.74     | 200  | 0    | QP     |
| 3   | 335.162 | 32.59  | 38.31      | -5.72  | 46.00      | -13.41     | 200  | 13   | QP     |
| 4   | 566.701 | 36.38  | 38.30      | -1.92  | 46.00      | -9.62      | 100  | 0    | QP     |
| 5 ! | 782.720 | 41.14  | 39.60      | 1.54   | 46.00      | -4.86      | 100  | 188  | QP     |

## Spurious Emissions, TX Mode, 9k-30M




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

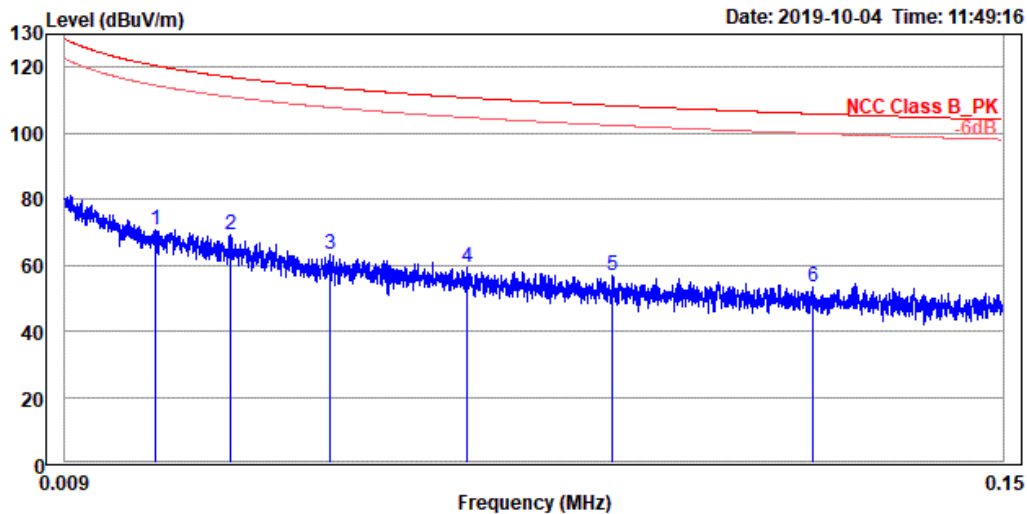

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2442MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq  | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz   | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 0.023 | 70.61  | -1.46      | 72.07  | 120.50     | -49.89     | 100  | 234  | QP     |
| 2 | 0.034 | 69.24  | -0.25      | 69.49  | 116.98     | -47.74     | 100  | 125  | QP     |
| 3 | 0.049 | 63.41  | -1.94      | 65.35  | 113.82     | -50.41     | 100  | 55   | QP     |
| 4 | 0.070 | 59.45  | -2.96      | 62.41  | 110.75     | -51.30     | 100  | 102  | QP     |
| 5 | 0.091 | 56.98  | -3.31      | 60.29  | 108.38     | -51.40     | 100  | 197  | QP     |
| 6 | 0.121 | 53.36  | -4.65      | 58.01  | 105.91     | -52.55     | 100  | 112  | QP     |

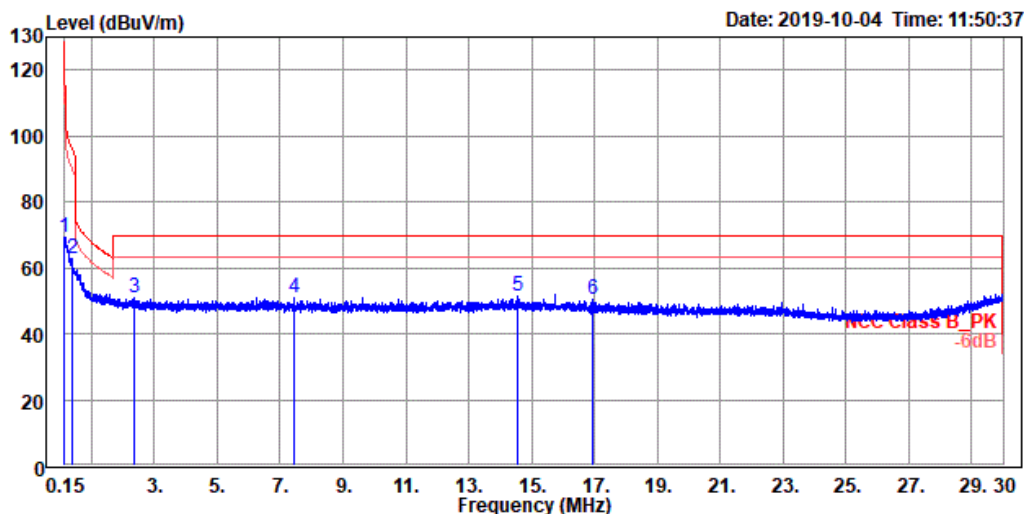


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_TX\_CH2442MHz  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq   | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|--------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz    | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 0.150  | 69.30  | 12.95      | 56.35  | 104.08     | -34.78     | 100  | 225  | Peak   |
| 2 | 0.383  | 62.64  | 13.92      | 48.72  | 95.94      | -33.30     | 100  | 178  | Peak   |
| 3 | 2.371  | 50.78  | 12.26      | 38.52  | 69.50      | -18.72     | 100  | 104  | Peak   |
| 4 | 7.463  | 50.92  | 12.70      | 38.22  | 69.50      | -18.58     | 100  | 207  | Peak   |
| 5 | 14.550 | 51.36  | 13.69      | 37.67  | 69.50      | -18.14     | 100  | 298  | Peak   |
| 6 | 16.932 | 50.22  | 13.05      | 37.17  | 69.50      | -19.28     | 100  | 310  | Peak   |

## Spurious Emissions, RX Mode, 1-18G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

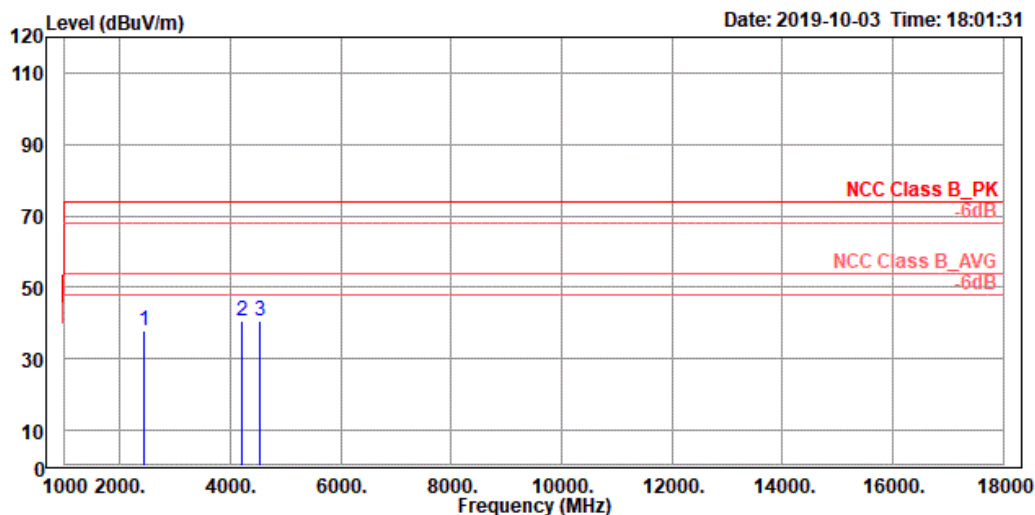

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_RX\_CH2442MHz  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read  | Limit  | Over   | APos   | TPos | Remark   |
|---|----------|--------|-------|--------|--------|--------|------|----------|
|   | MHz      | dBuV/m | Level | Factor | Line   | Limit  |      |          |
|   |          |        | dBuV  | dB/m   | dBuV/m | dB     | cm   | deg      |
| 1 | 2436.000 | 37.93  | 51.96 | -14.03 | 74.00  | -36.07 | 200  | 54 Peak  |
| 2 | 4218.000 | 40.59  | 51.79 | -11.20 | 74.00  | -33.41 | 100  | 337 Peak |
| 3 | 4525.000 | 40.82  | 51.28 | -10.46 | 74.00  | -33.18 | 100  | 141 Peak |

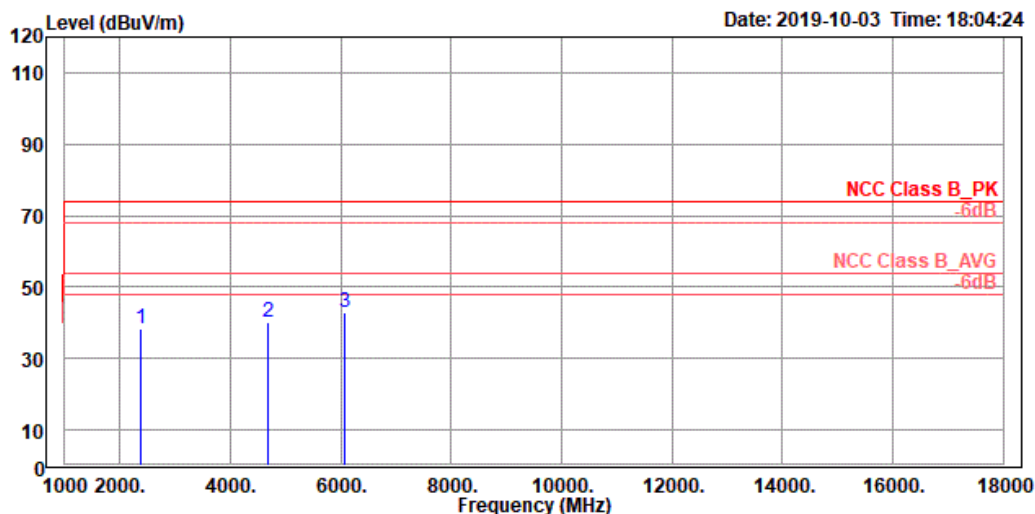


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_RX\_CH2442MHz  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 2385.000 | 38.23  | 52.49      | -14.26 | 74.00      | -35.77     | 100  | 327  | Peak   |
| 2 | 4684.000 | 40.36  | 50.45      | -10.09 | 74.00      | -33.64     | 100  | 187  | Peak   |
| 3 | 6085.000 | 43.00  | 50.93      | -7.93  | 74.00      | -31.00     | 200  | 281  | Peak   |

## Spurious Emissions, RX Mode, 18-26G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

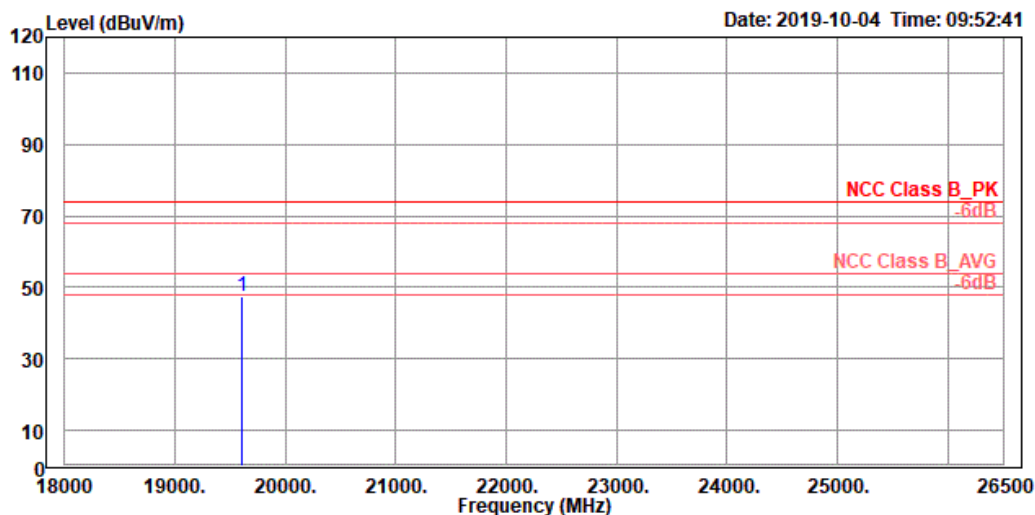

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_RX\_CH2442MHz  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark |
|---|-----------|--------|---------------|--------|---------------|---------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |        |
| 1 | 19609.330 | 47.43  | 49.02         | -1.59  | 74.00         | -26.57        | 100  | 32   | Peak   |

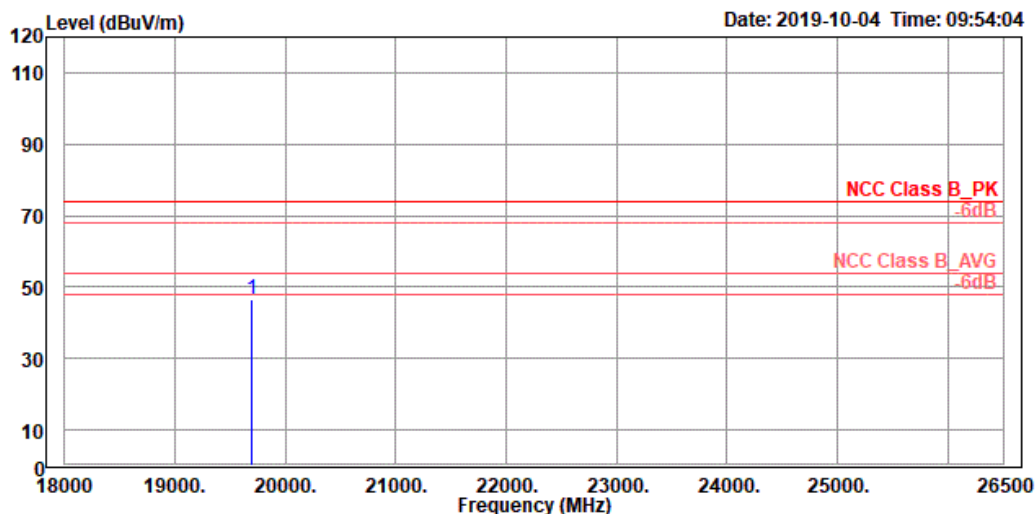


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_RX\_CH2442MHz  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read<br>Level | Factor | Limit<br>Line | Over<br>Limit | APos | TPos | Remark |
|---|-----------|--------|---------------|--------|---------------|---------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV          | dB/m   | dBuV/m        | dB            | cm   | deg  |        |
| 1 | 19699.050 | 46.62  | 48.10         | -1.48  | 74.00         | -27.38        | 100  | 198  | Peak   |

## Spurious Emissions, RX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

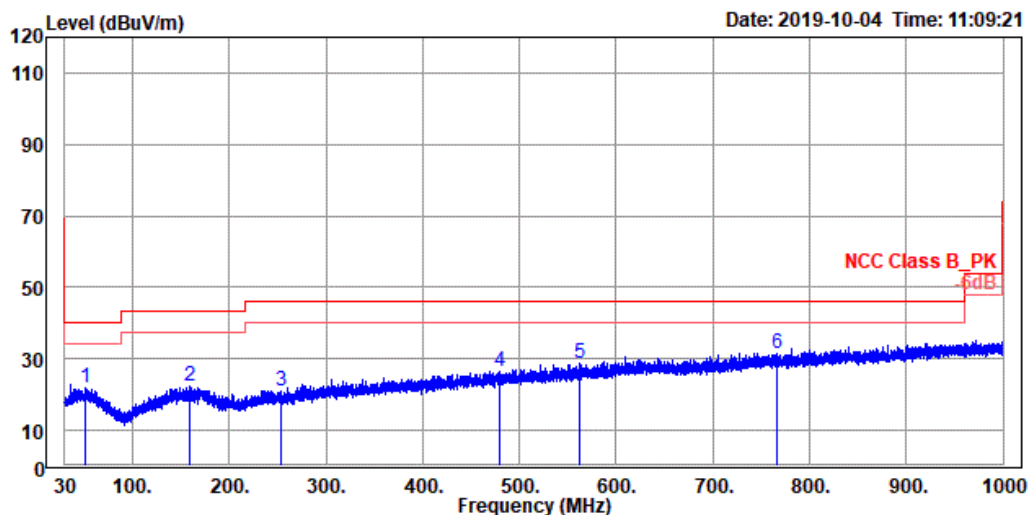

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_RX\_CH2442MHz  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq    | Level  | Read Level | Factor | Limit  | Over Limit | APos | TPos | Remark |
|---|---------|--------|------------|--------|--------|------------|------|------|--------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m | dB         | cm   | deg  |        |
| 1 | 50.661  | 21.96  | 29.42      | -7.46  | 40.00  | -18.04     | 200  | 70   | QP     |
| 2 | 159.495 | 22.30  | 29.78      | -7.48  | 43.50  | -21.20     | 200  | 118  | QP     |
| 3 | 253.682 | 21.19  | 29.21      | -8.02  | 46.00  | -24.81     | 200  | 30   | QP     |
| 4 | 480.080 | 26.54  | 30.13      | -3.59  | 46.00  | -19.46     | 200  | 67   | QP     |
| 5 | 562.821 | 28.84  | 30.88      | -2.04  | 46.00  | -17.16     | 200  | 20   | QP     |
| 6 | 765.745 | 31.45  | 30.06      | 1.39   | 46.00  | -14.55     | 100  | 360  | QP     |

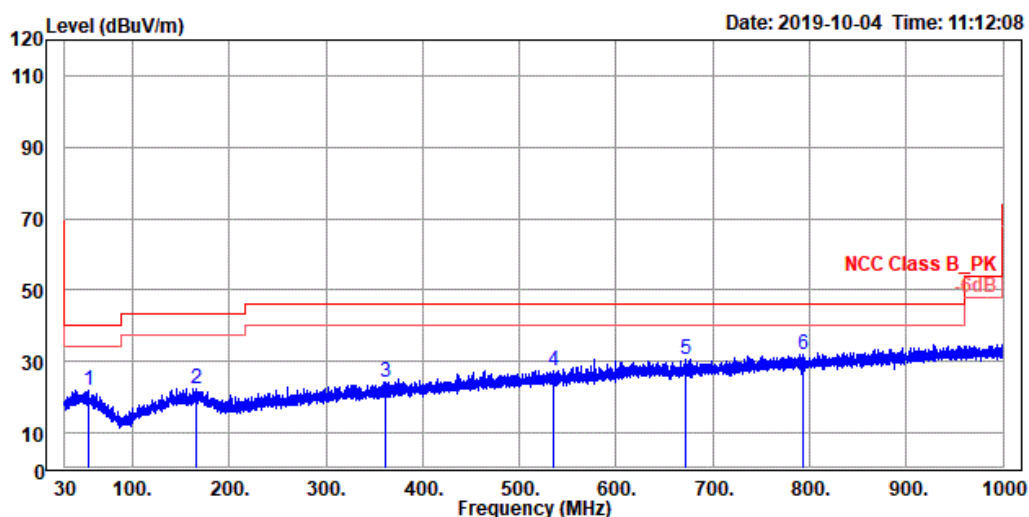


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_RX\_CH2442MHz  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq    | Level  | Read Level | Factor | Limit  | Over Limit | APos | TPos | Remark |
|---|---------|--------|------------|--------|--------|------------|------|------|--------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m | dB         | cm   | deg  |        |
| 1 | 54.347  | 22.02  | 29.65      | -7.63  | 40.00  | -17.98     | 200  | 328  | QP     |
| 2 | 166.479 | 22.34  | 29.57      | -7.23  | 43.50  | -21.16     | 200  | 22   | QP     |
| 3 | 361.643 | 24.06  | 29.54      | -5.48  | 46.00  | -21.94     | 100  | 144  | QP     |
| 4 | 535.370 | 27.58  | 30.20      | -2.62  | 46.00  | -18.42     | 100  | 160  | QP     |
| 5 | 671.752 | 30.48  | 30.87      | -0.39  | 46.00  | -15.52     | 100  | 224  | QP     |
| 6 | 793.778 | 32.07  | 30.45      | 1.62   | 46.00  | -13.93     | 200  | 191  | QP     |

## Spurious Emissions, RX Mode, 9K-30M




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

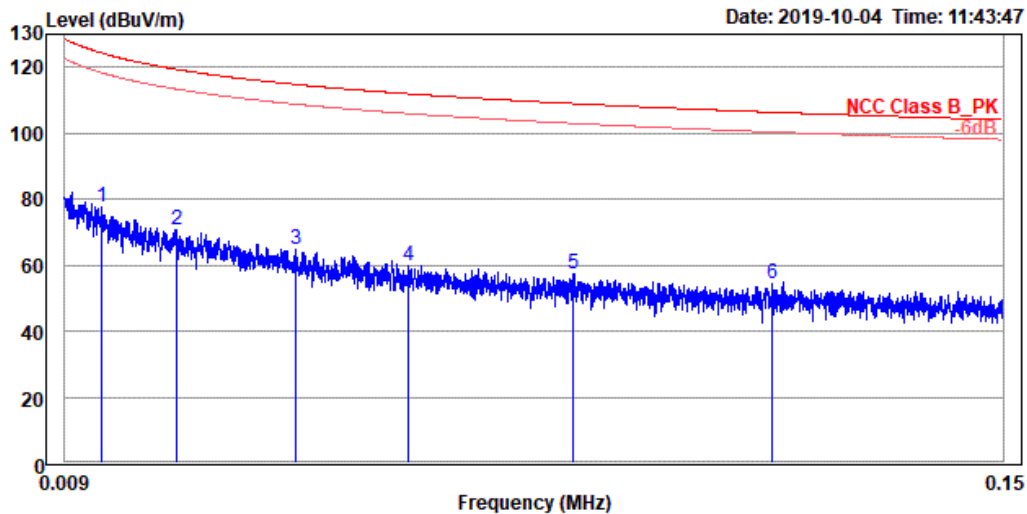

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_RX\_CH2442MHz  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq  | Level  | Read  | Limit  | Over   | APos   | TPos | Remark |
|---|-------|--------|-------|--------|--------|--------|------|--------|
|   | MHz   | dBuV/m | Level | Factor | Line   | Limit  |      |        |
|   |       |        | dBuV  | dB/m   | dBuV/m | dB     | cm   | deg    |
| 1 | 0.015 | 77.84  | 1.88  | 75.96  | 124.32 | -46.48 | 100  | 31 QP  |
| 2 | 0.026 | 70.78  | -0.73 | 71.51  | 119.38 | -48.60 | 100  | 51 QP  |
| 3 | 0.044 | 64.52  | -2.09 | 66.61  | 114.77 | -50.25 | 100  | 156 QP |
| 4 | 0.061 | 59.97  | -3.59 | 63.56  | 111.94 | -51.97 | 100  | 23 QP  |
| 5 | 0.086 | 57.47  | -3.34 | 60.81  | 108.96 | -51.49 | 100  | 157 QP |
| 6 | 0.115 | 54.27  | -4.09 | 58.36  | 106.36 | -52.09 | 100  | 6 QP   |

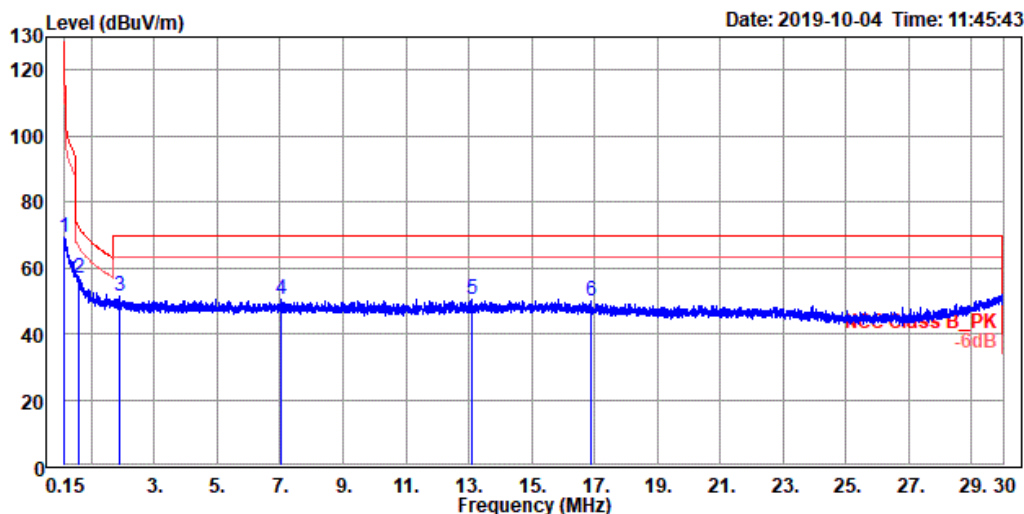


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : ANT+\_RX\_CH2442MHz  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq   | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|--------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz    | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 0.150  | 69.28  | 12.93      | 56.35  | 104.08     | -34.80     | 100  | 16   | QP     |
| 2 | 0.607  | 56.95  | 11.91      | 45.04  | 71.94      | -14.99     | 100  | 251  | QP     |
| 3 | 1.899  | 51.42  | 12.59      | 38.83  | 69.50      | -18.08     | 100  | 312  | QP     |
| 4 | 7.010  | 50.38  | 12.02      | 38.36  | 69.50      | -19.12     | 100  | 185  | QP     |
| 5 | 13.108 | 50.42  | 12.99      | 37.43  | 69.50      | -19.08     | 100  | 220  | QP     |
| 6 | 16.911 | 49.73  | 12.55      | 37.18  | 69.50      | -19.77     | 100  | 302  | QP     |


**Spurious Emissions, Band Edges, 2.35-2.5G**

TÜV Rheinland Waiwan Ltd.  
 No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel:+886-2172-1000 Fax:+886-2172-1322

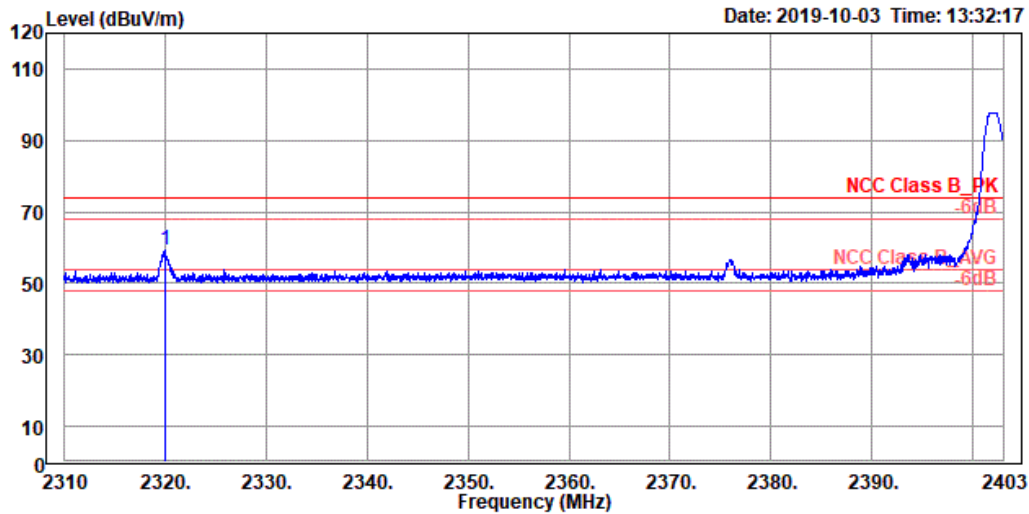


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
 Condition : NCC Class B\_PK Horizontal  
 Test Engineer: Kay Wu  
 Product : 自行車訓練台  
 Model NO : T2980  
 Mode : LE\_TX\_CH00  
 Power setting: 4 dB  
 Test Rating : 230Vac/50Hz  
 Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 2319.889 | 59.11  | 22.44      | 36.67  | 74.00      | -14.89     | 370  | 141  | Peak   |

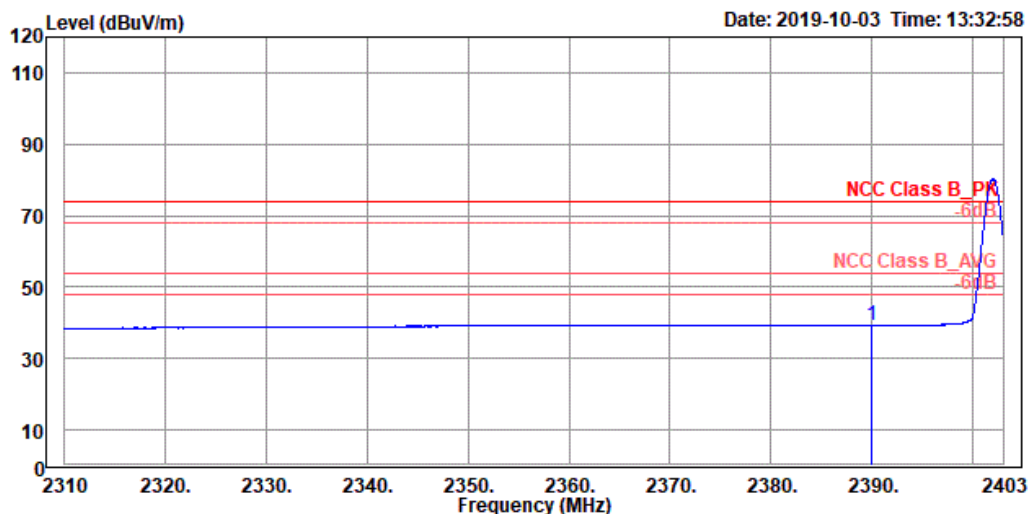


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH00  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 2389.918 | 39.28  | 1.85       | 37.43  | 54.00      | -14.72     | 370  | 141  | Average |

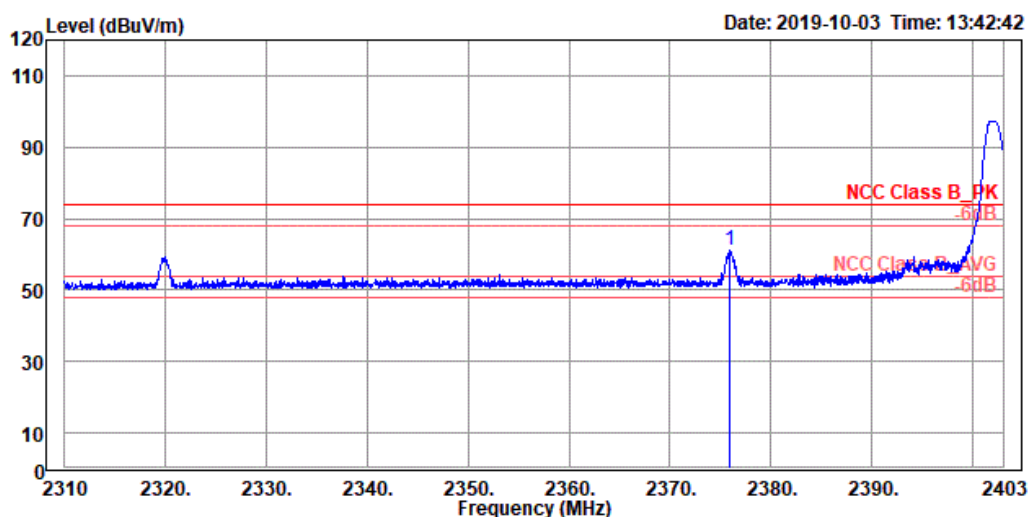


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH00  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 2375.875 | 60.95  | 23.56      | 37.39  | 74.00      | -13.05     | 100  | 195  | Peak   |

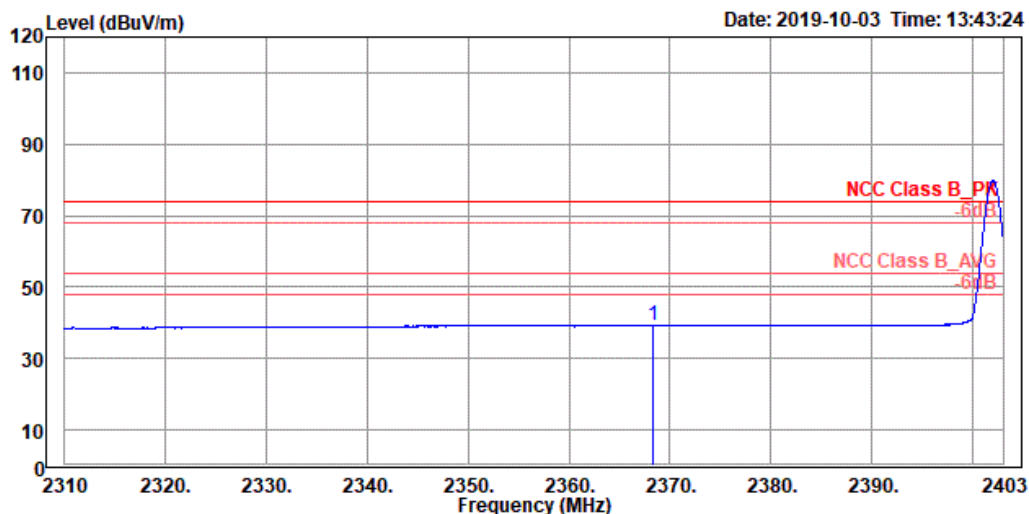


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH00  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 2368.280 | 39.31  | 1.94       | 37.37  | 54.00      | -14.69     | 100  | 195  | Average |

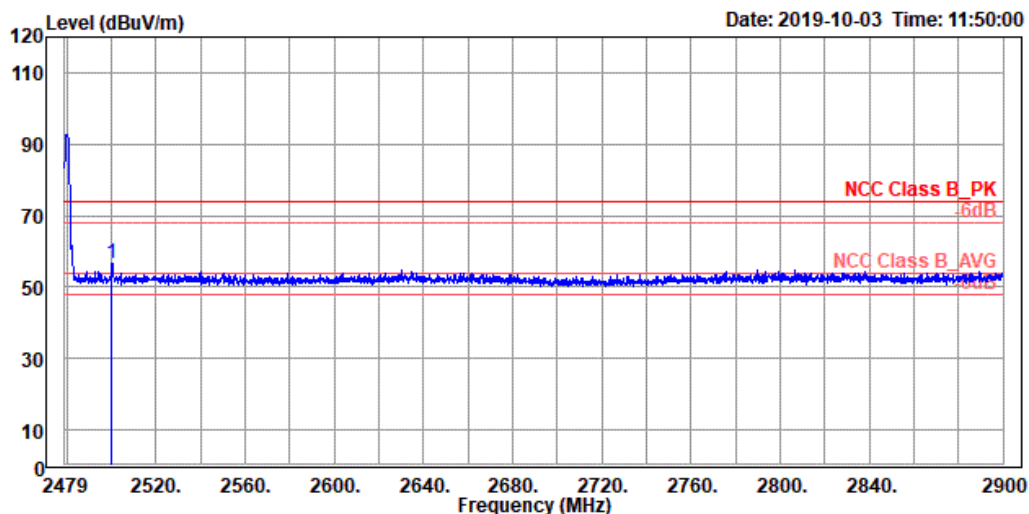


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH39  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 2499.910 | 56.75  | 18.97      | 37.78  | 74.00      | -17.25     | 100  | 189  | Peak   |

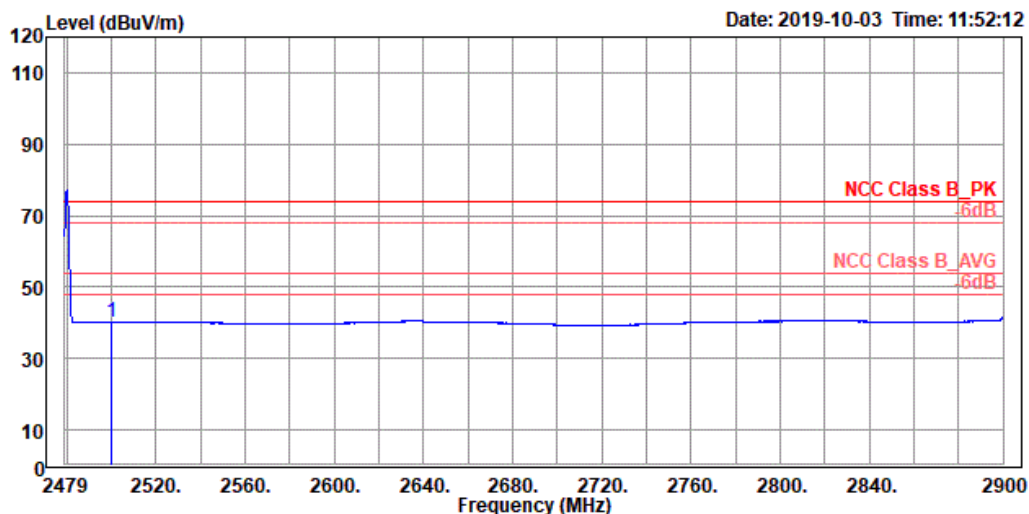


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH39  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 2500.050 | 40.24  | 2.46       | 37.78  | 54.00      | -13.76     | 100  | 189  | Average |

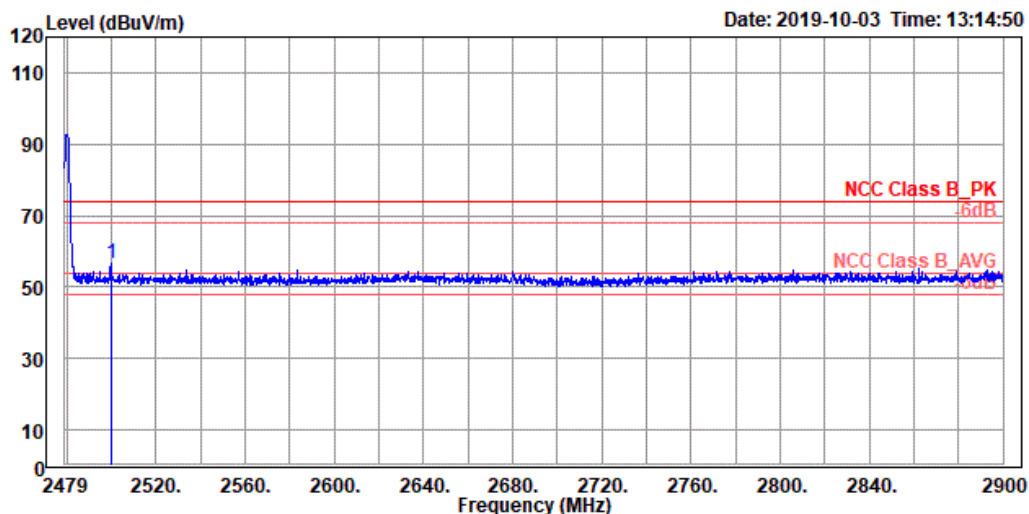

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH39  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 2499.910 | 56.57  | 18.79      | 37.78  | 74.00      | -17.43     | 195  | 219  | Peak   |

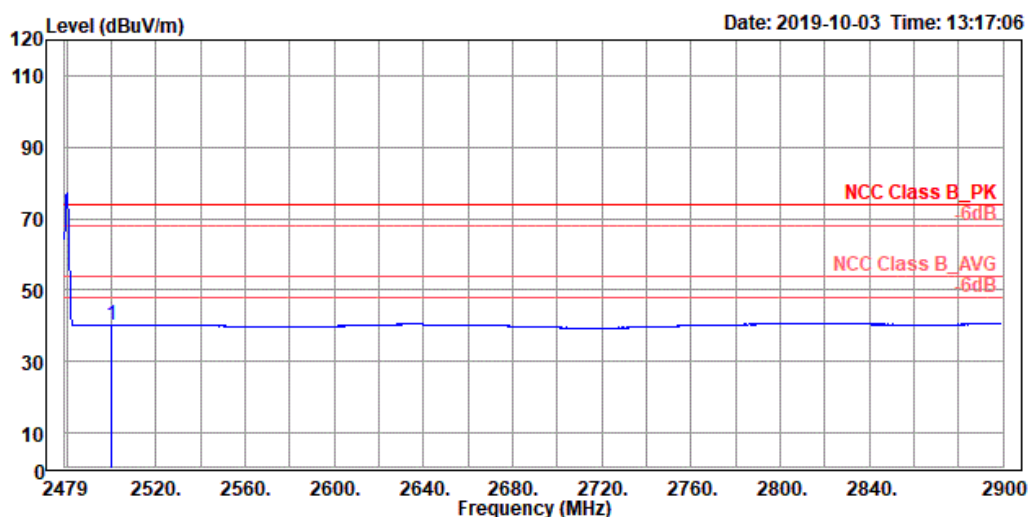


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH39  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 2499.910 | 40.22  | 2.44       | 37.78  | 54.00      | -13.78     | 195  | 219  | Average |

## Spurious Emissions, TX Mode, 1-18G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

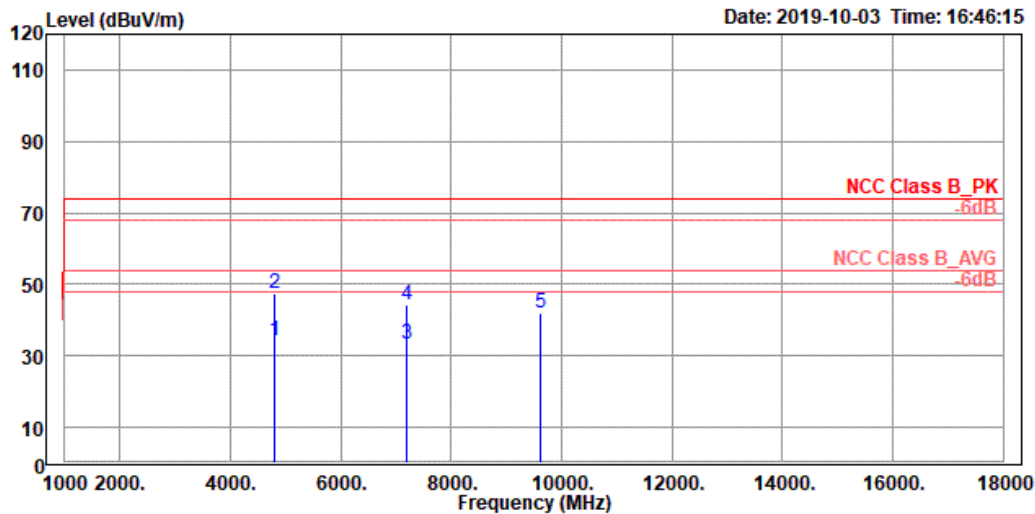


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH00  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4804.000 | 34.00  | 44.02      | -10.02 | 54.00      | -20.00     | 200  | 153  | Average |
| 2 | 4804.000 | 47.64  | 57.66      | -10.02 | 74.00      | -26.36     | 200  | 153  | Peak    |
| 3 | 7206.000 | 33.42  | 41.15      | -7.73  | 54.00      | -20.58     | 200  | 159  | Average |
| 4 | 7206.000 | 44.28  | 52.01      | -7.73  | 74.00      | -29.72     | 200  | 159  | Peak    |
| 5 | 9608.000 | 41.76  | 47.03      | -5.27  | 74.00      | -32.24     | 283  | 0    | Peak    |

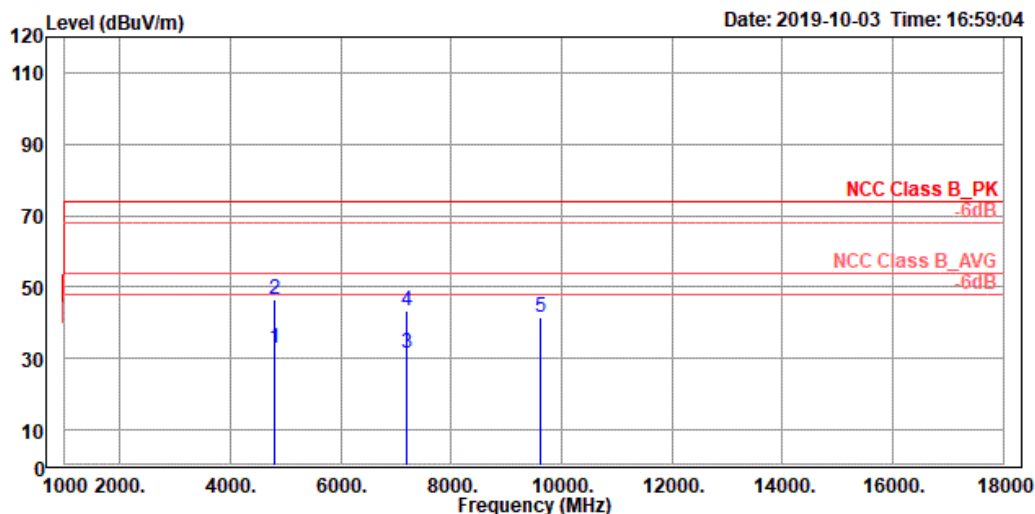


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH00  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4804.000 | 32.74  | 42.76      | -10.02 | 54.00      | -21.26     | 100  | 86   | Average |
| 2 | 4804.000 | 46.35  | 56.37      | -10.02 | 74.00      | -27.65     | 100  | 86   | Peak    |
| 3 | 7206.000 | 31.49  | 39.22      | -7.73  | 54.00      | -22.51     | 200  | 219  | Average |
| 4 | 7206.000 | 43.54  | 51.27      | -7.73  | 74.00      | -30.46     | 200  | 219  | Peak    |
| 5 | 9608.000 | 41.68  | 46.95      | -5.27  | 74.00      | -32.32     | 400  | 288  | Peak    |

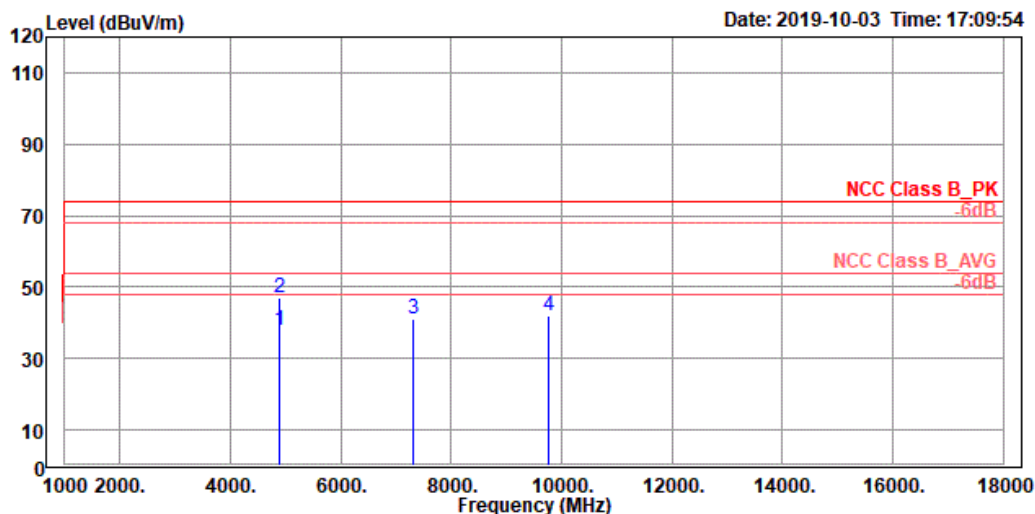


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH19  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4880.000 | 37.78  | 47.84      | -10.06 | 54.00      | -16.22     | 200  | 75   | Average |
| 2 | 4880.000 | 47.10  | 57.16      | -10.06 | 74.00      | -26.90     | 200  | 75   | Peak    |
| 3 | 7320.000 | 41.14  | 48.88      | -7.74  | 74.00      | -32.86     | 200  | 155  | Peak    |
| 4 | 9760.000 | 41.90  | 46.86      | -4.96  | 74.00      | -32.10     | 400  | 129  | Peak    |

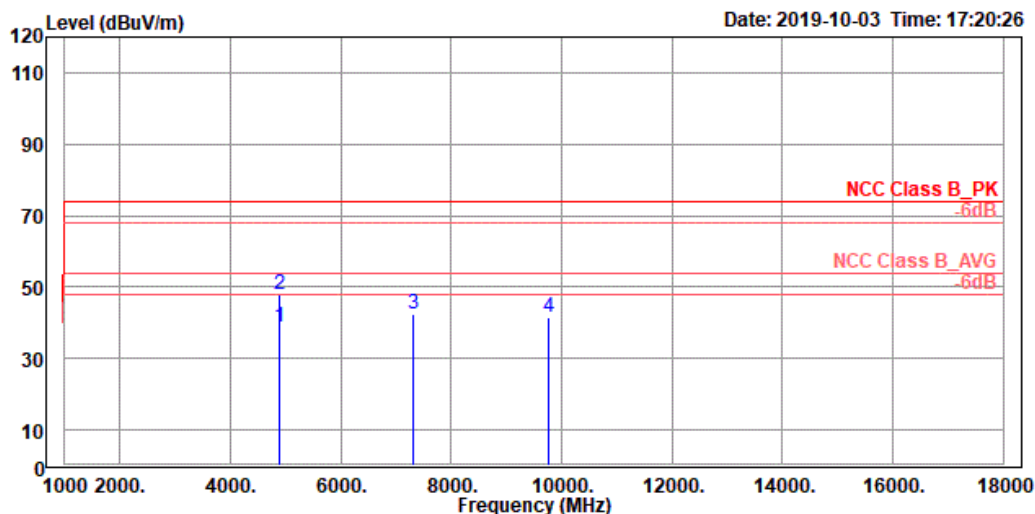


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH19  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4880.000 | 38.62  | 48.68      | -10.06 | 54.00      | -15.38     | 200  | 211  | Average |
| 2 | 4880.000 | 47.73  | 57.79      | -10.06 | 74.00      | -26.27     | 200  | 211  | Peak    |
| 3 | 7320.000 | 42.23  | 49.97      | -7.74  | 74.00      | -31.77     | 200  | 204  | Peak    |
| 4 | 9760.000 | 41.72  | 46.68      | -4.96  | 74.00      | -32.28     | 400  | 222  | Peak    |

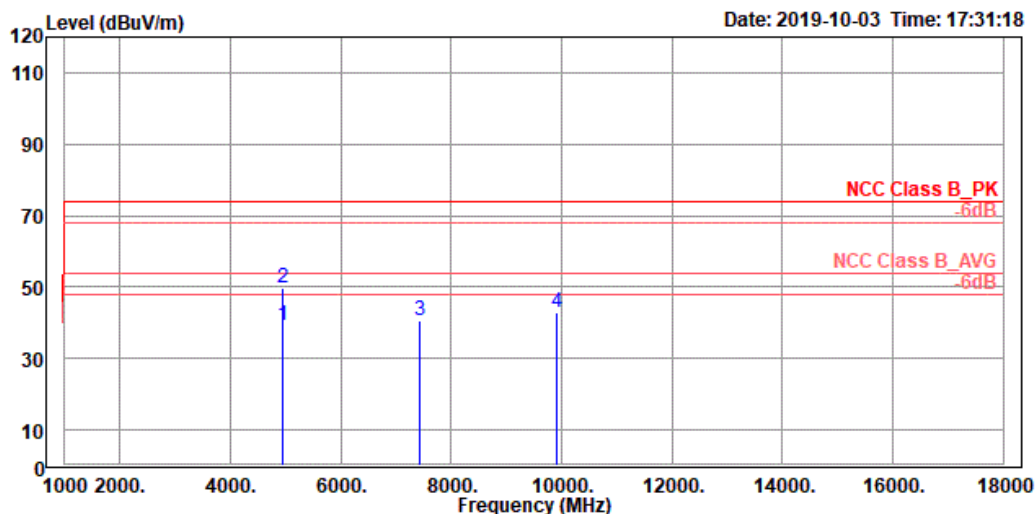

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH39  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4960.000 | 39.38  | 49.38      | -10.00 | 54.00      | -14.62     | 200  | 209  | Average |
| 2 | 4960.000 | 49.58  | 59.58      | -10.00 | 74.00      | -24.42     | 200  | 209  | Peak    |
| 3 | 7440.000 | 40.67  | 48.33      | -7.66  | 74.00      | -33.33     | 200  | 190  | Peak    |
| 4 | 9920.000 | 42.78  | 47.40      | -4.62  | 74.00      | -31.22     | 400  | 90   | Peak    |

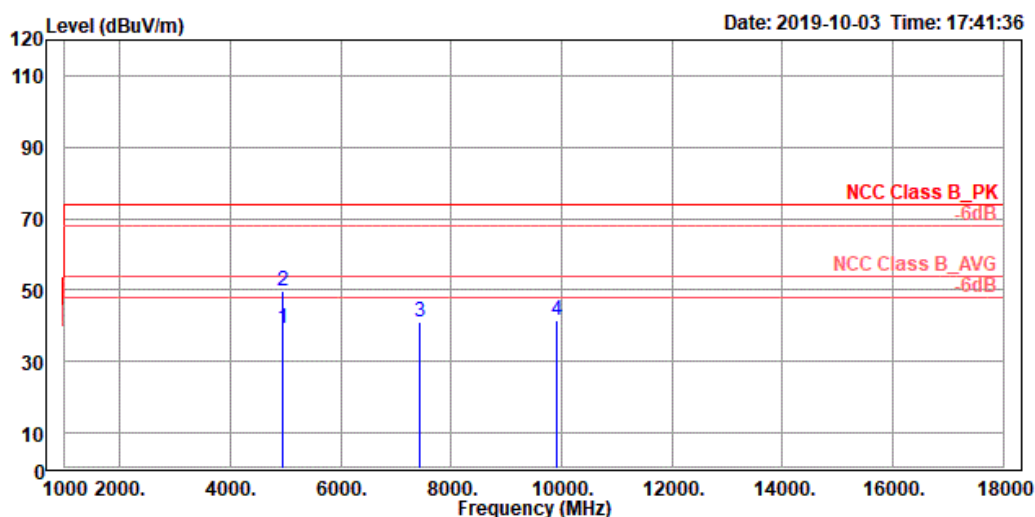


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH39  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark  |
|---|----------|--------|------------|--------|------------|------------|------|------|---------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |         |
| 1 | 4960.000 | 39.01  | 49.01      | -10.00 | 54.00      | -14.99     | 300  | 155  | Average |
| 2 | 4960.000 | 49.69  | 59.69      | -10.00 | 74.00      | -24.31     | 300  | 155  | Peak    |
| 3 | 7440.000 | 41.10  | 48.76      | -7.66  | 74.00      | -32.90     | 200  | 90   | Peak    |
| 4 | 9920.000 | 41.68  | 46.30      | -4.62  | 74.00      | -32.32     | 100  | 247  | Peak    |

# Spurious Emissions, TX Mode, 18-26G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

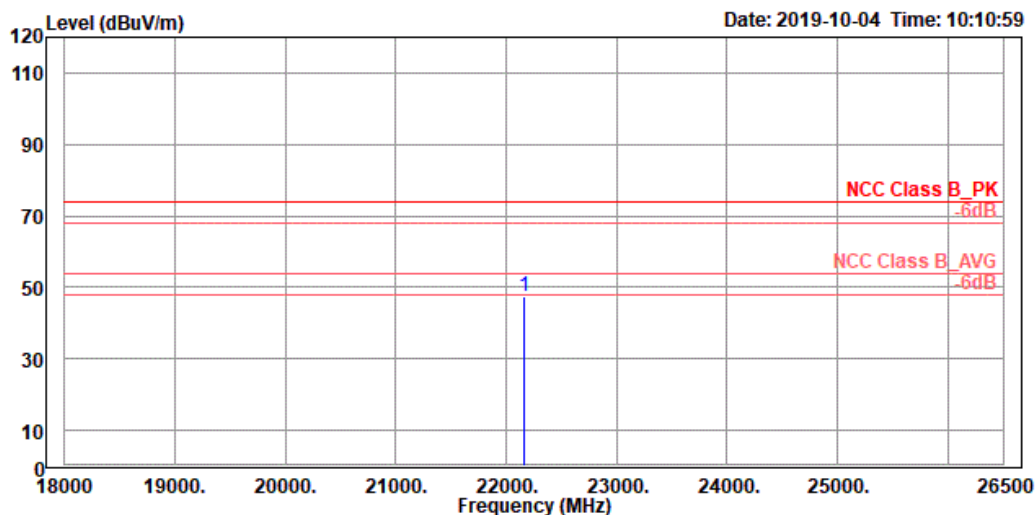


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH00  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 22162.170 | 47.35  | 45.88      | 1.47   | 74.00      | -26.65     | 100  | 46   | Peak   |

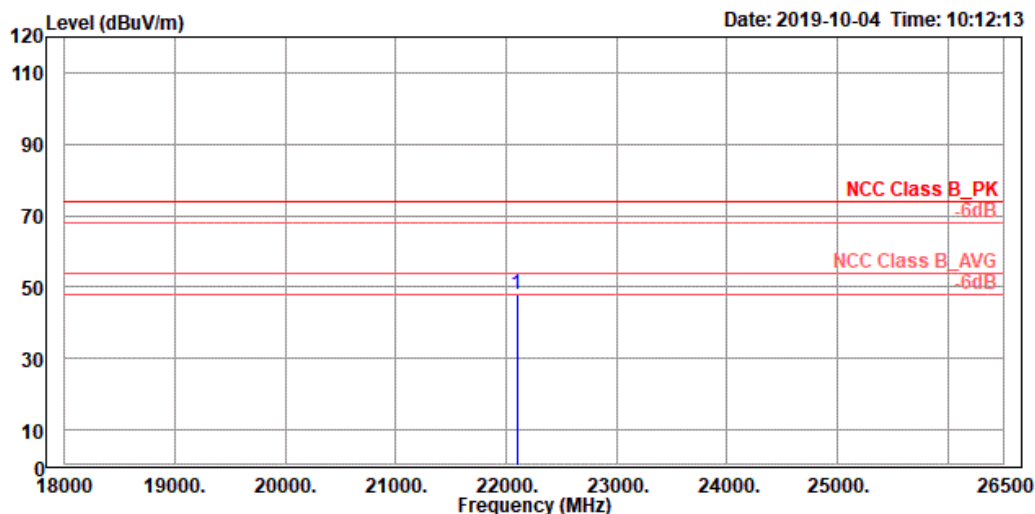


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH00  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 22095.110 | 47.92  | 46.52      | 1.40   | 74.00      | -26.08     | 100  | 231  | Peak   |

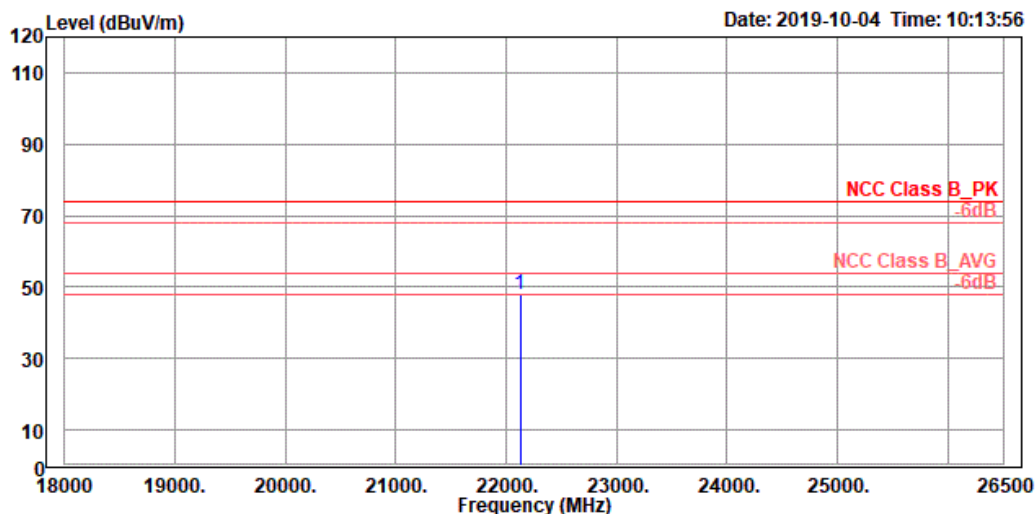


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH19  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 22124.390 | 47.71  | 46.28      | 1.43   | 74.00      | -26.29     | 100  | 123  | Peak   |

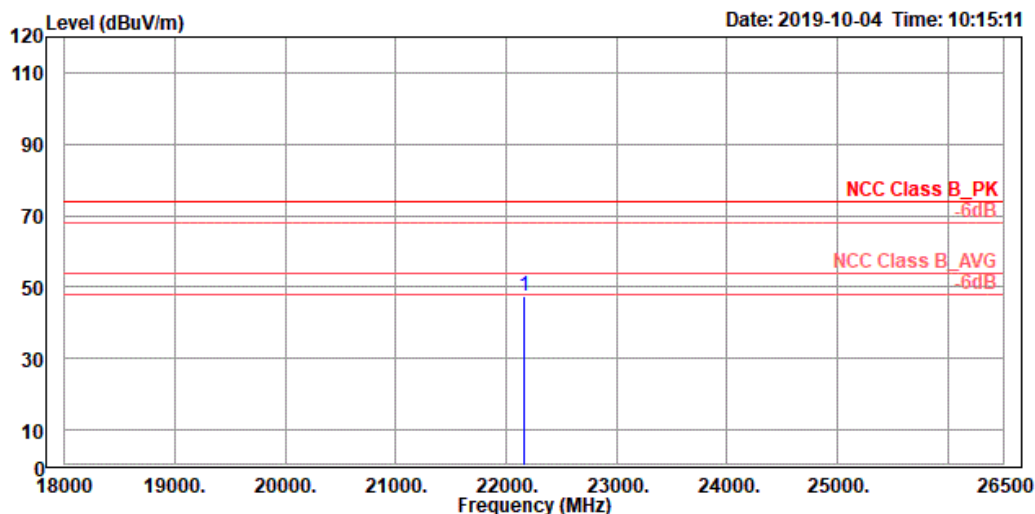


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH19  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 22155.550 | 47.51  | 46.04      | 1.47   | 74.00      | -26.49     | 100  | 231  | Peak   |

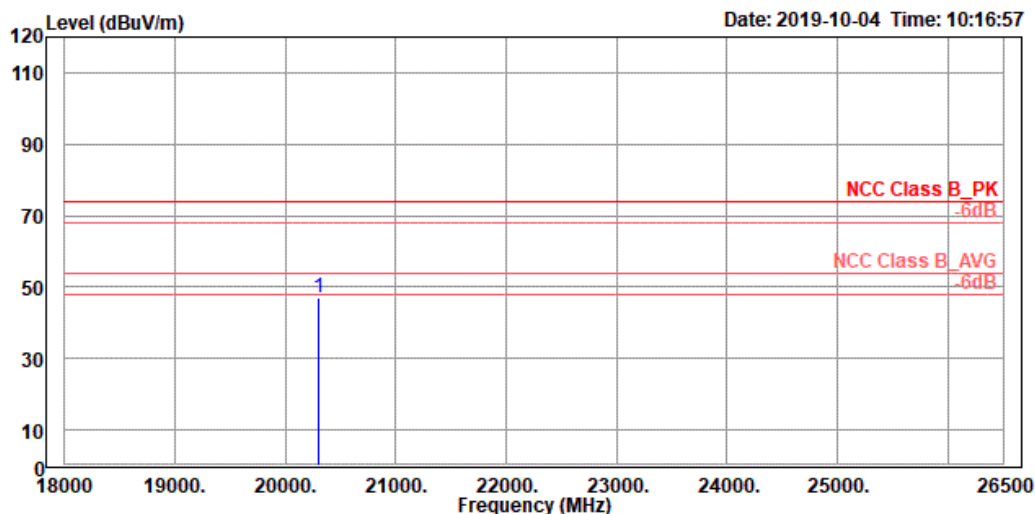

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH39  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 20304.450 | 46.83  | 47.59      | -0.76  | 74.00      | -27.17     | 100  | 195  | Peak   |

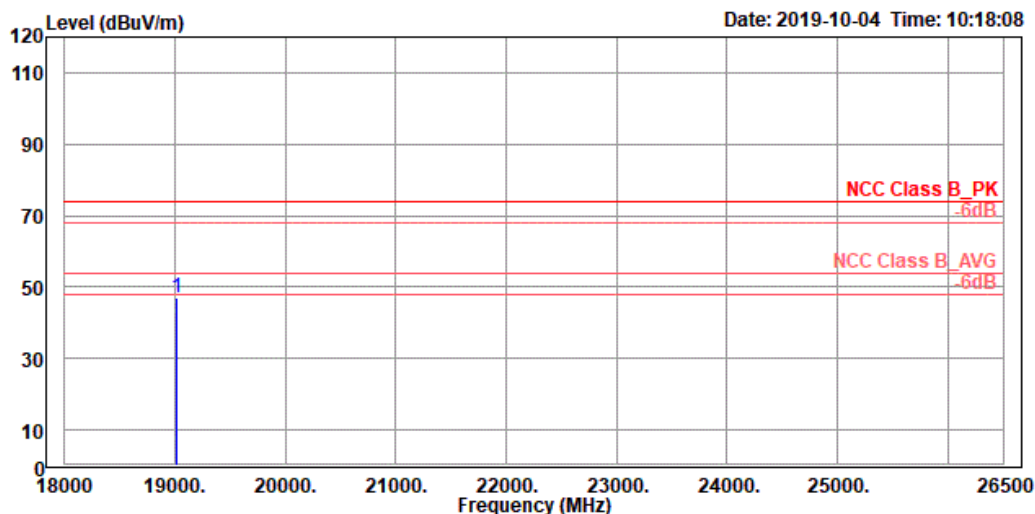


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH39  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 19010.550 | 47.05  | 48.83      | -1.78  | 74.00      | -26.95     | 100  | 89   | Peak   |

## Spurious Emissions, TX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

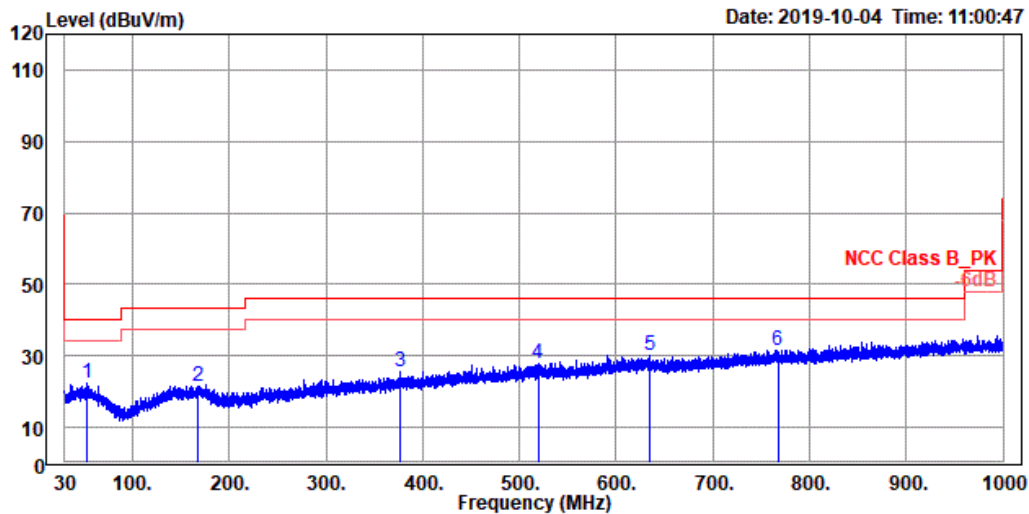

Site : 3m\_Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH19  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq    | Level  | Read Level | Factor | Limit  | Over Limit | APos | TPos | Remark |
|---|---------|--------|------------|--------|--------|------------|------|------|--------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m | dB         | cm   | deg  |        |
| 1 | 52.213  | 22.16  | 29.62      | -7.46  | 40.00  | -17.84     | 100  | 241  | QP     |
| 2 | 168.031 | 21.63  | 28.84      | -7.21  | 43.50  | -21.87     | 200  | 198  | QP     |
| 3 | 376.872 | 25.69  | 30.75      | -5.06  | 46.00  | -20.31     | 100  | 9    | QP     |
| 4 | 519.268 | 27.81  | 30.62      | -2.81  | 46.00  | -18.19     | 200  | 60   | QP     |
| 5 | 634.601 | 30.02  | 30.74      | -0.72  | 46.00  | -15.98     | 200  | 356  | QP     |
| 6 | 767.200 | 31.42  | 30.02      | 1.40   | 46.00  | -14.58     | 100  | 285  | QP     |

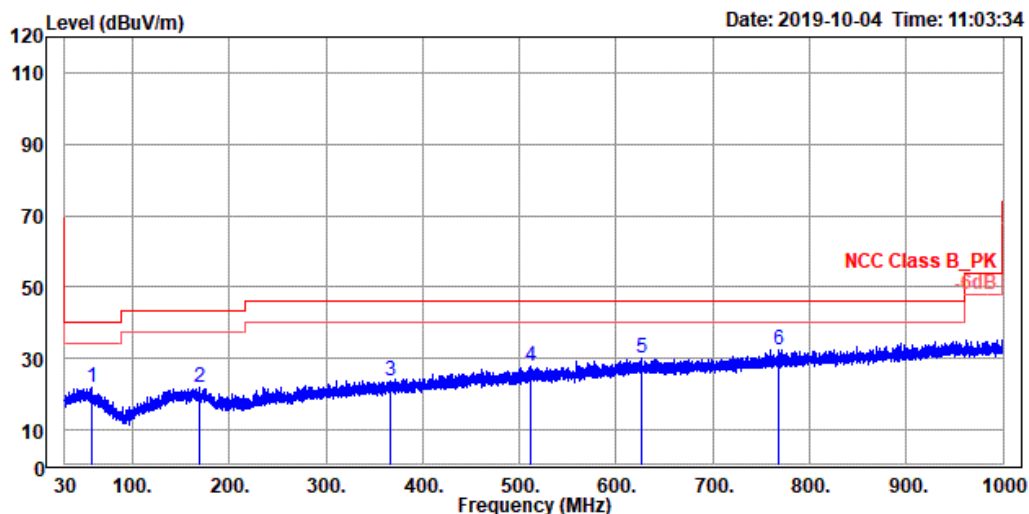


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH19  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|---------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 57.160  | 21.71  | 29.61      | -7.90  | 40.00      | -18.29     | 200  | 354  | QP     |
| 2 | 168.807 | 22.10  | 29.33      | -7.23  | 43.50      | -21.40     | 200  | 148  | QP     |
| 3 | 366.008 | 23.66  | 28.99      | -5.33  | 46.00      | -22.34     | 200  | 300  | QP     |
| 4 | 510.926 | 27.86  | 30.82      | -2.96  | 46.00      | -18.14     | 100  | 72   | QP     |
| 5 | 626.744 | 30.31  | 31.09      | -0.78  | 46.00      | -15.69     | 100  | 15   | QP     |
| 6 | 767.685 | 32.54  | 31.12      | 1.42   | 46.00      | -13.46     | 200  | 29   | QP     |

# Spurious Emissions, TX Mode, 9k-30M




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

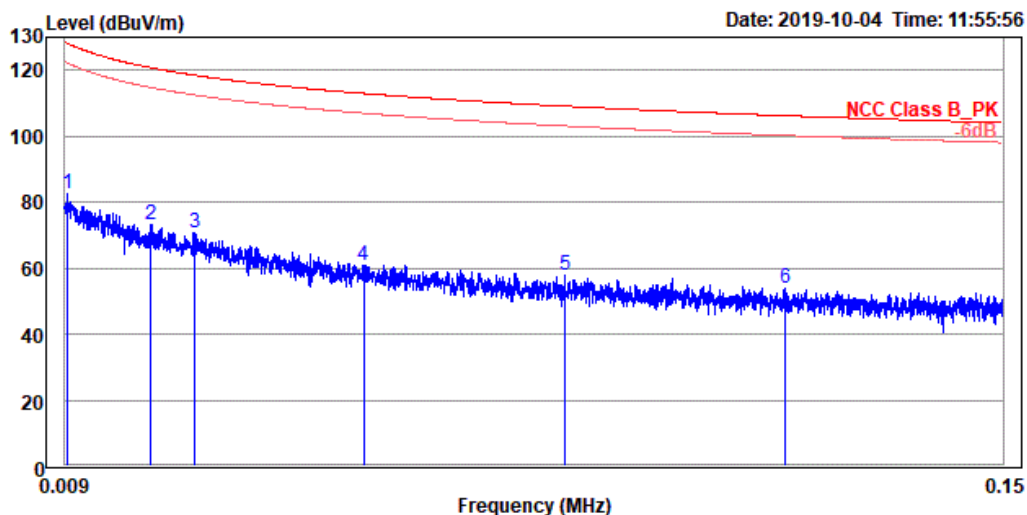

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH19  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq  | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz   | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 0.009 | 82.40  | 2.80       | 79.60  | 128.21     | -45.81     | 100  | 332  | QP     |
| 2 | 0.022 | 73.17  | 0.99       | 72.18  | 120.75     | -47.58     | 100  | 284  | QP     |
| 3 | 0.029 | 70.81  | -0.20      | 71.01  | 118.49     | -47.68     | 100  | 107  | QP     |
| 4 | 0.054 | 60.91  | -3.60      | 64.51  | 112.96     | -52.05     | 100  | 99   | QP     |
| 5 | 0.084 | 57.84  | -3.08      | 60.92  | 109.10     | -51.26     | 100  | 73   | QP     |
| 6 | 0.117 | 53.97  | -4.28      | 58.25  | 106.21     | -52.24     | 100  | 52   | QP     |

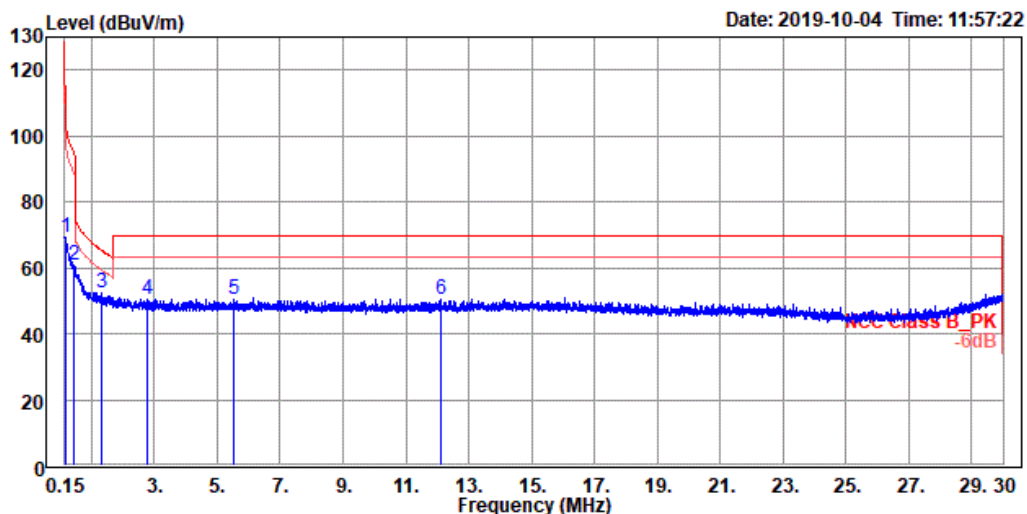


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_TX\_CH19  
Power setting: 4 dB  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq   | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|--------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz    | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 0.165  | 69.44  | 13.96      | 55.48  | 103.25     | -33.81     | 100  | 133  | QP     |
| 2 | 0.449  | 60.65  | 13.06      | 47.59  | 94.57      | -33.92     | 100  | 25   | QP     |
| 3 | 1.308  | 52.49  | 12.90      | 39.59  | 65.27      | -12.78     | 100  | 198  | QP     |
| 4 | 2.780  | 50.53  | 12.21      | 38.32  | 69.50      | -18.97     | 100  | 331  | QP     |
| 5 | 5.511  | 50.53  | 12.18      | 38.35  | 69.50      | -18.97     | 100  | 241  | QP     |
| 6 | 12.099 | 50.21  | 12.90      | 37.31  | 69.50      | -19.29     | 100  | 312  | QP     |

## Spurious Emissions, RX Mode, 1-18G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

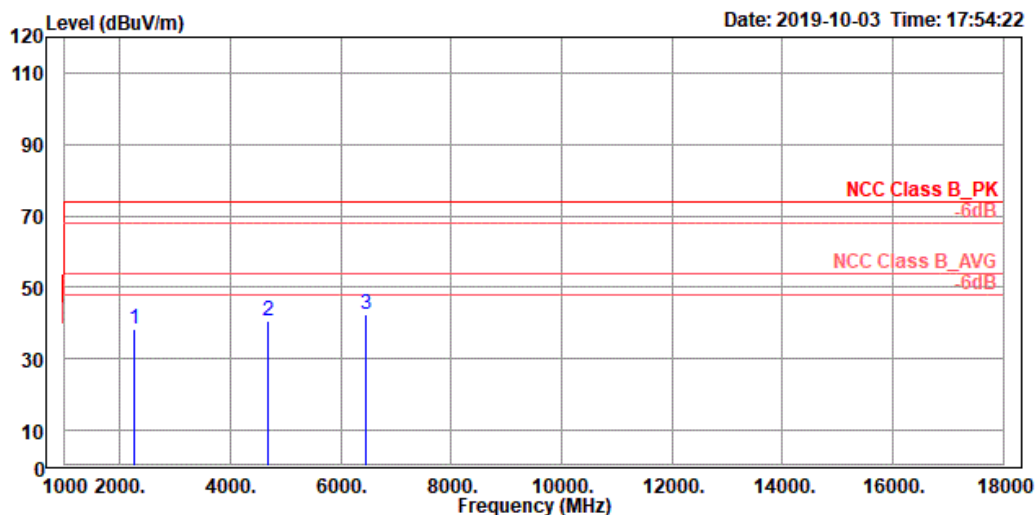

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_RX\_CH19  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read  | Limit  | Over   | APos   | TPos | Remark   |
|---|----------|--------|-------|--------|--------|--------|------|----------|
|   | MHz      | dBuV/m | Level | Factor | Line   | Limit  |      |          |
|   |          |        | dBuV  | dB/m   | dBuV/m | dB     | cm   | deg      |
| 1 | 2247.000 | 38.16  | 53.04 | -14.88 | 74.00  | -35.84 | 100  | 220 Peak |
| 2 | 4684.000 | 40.52  | 50.61 | -10.09 | 74.00  | -33.48 | 200  | 233 Peak |
| 3 | 6461.000 | 42.35  | 50.20 | -7.85  | 74.00  | -31.65 | 100  | 165 Peak |

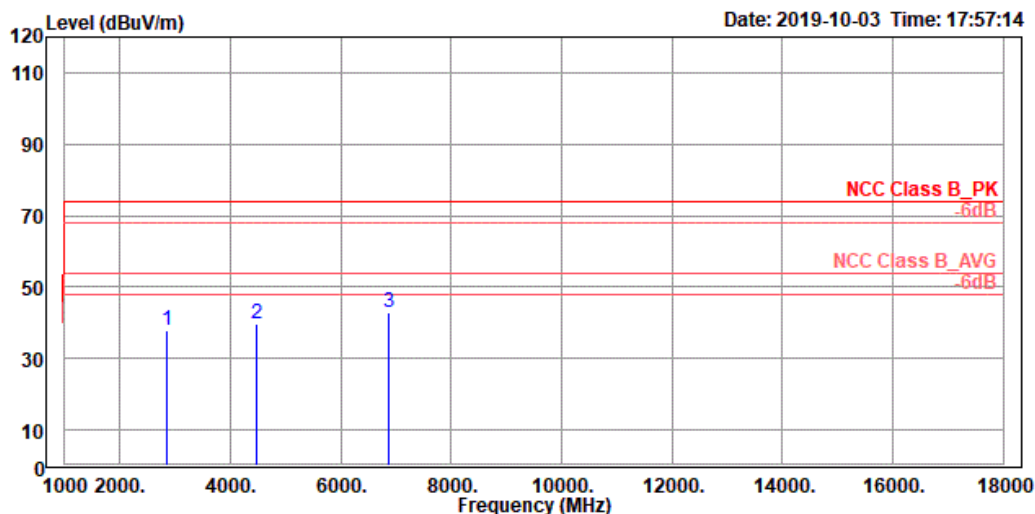


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_RX\_CH19  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq     | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz      | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 2835.000 | 38.06  | 51.67      | -13.61 | 74.00      | -35.94     | 100  | 311  | Peak   |
| 2 | 4474.000 | 39.75  | 50.34      | -10.59 | 74.00      | -34.25     | 100  | 230  | Peak   |
| 3 | 6857.000 | 42.94  | 50.65      | -7.71  | 74.00      | -31.06     | 200  | 32   | Peak   |

## Spurious Emissions, RX Mode, 18-26G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

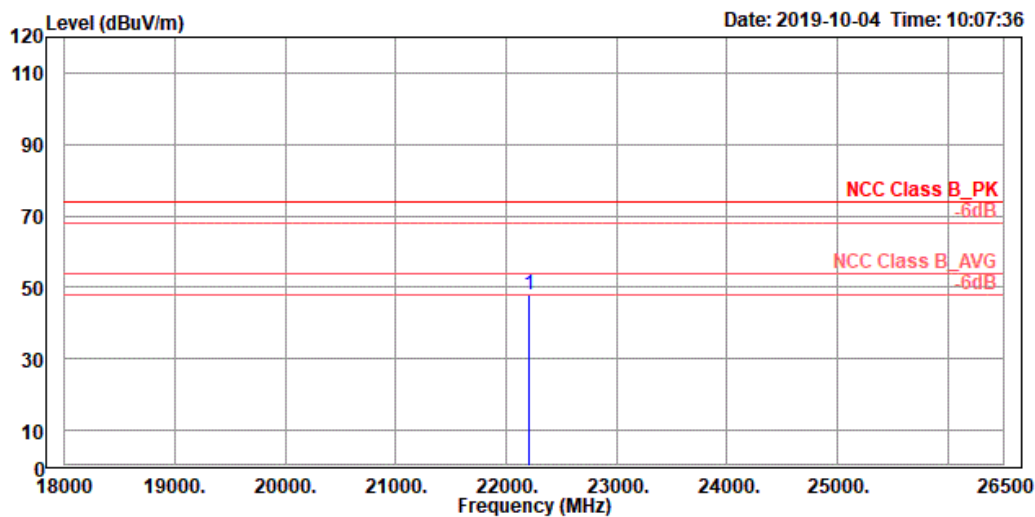

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_RX\_CH19  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 22202.780 | 47.74  | 46.21      | 1.53   | 74.00      | -26.26     | 100  | 86   | Peak   |

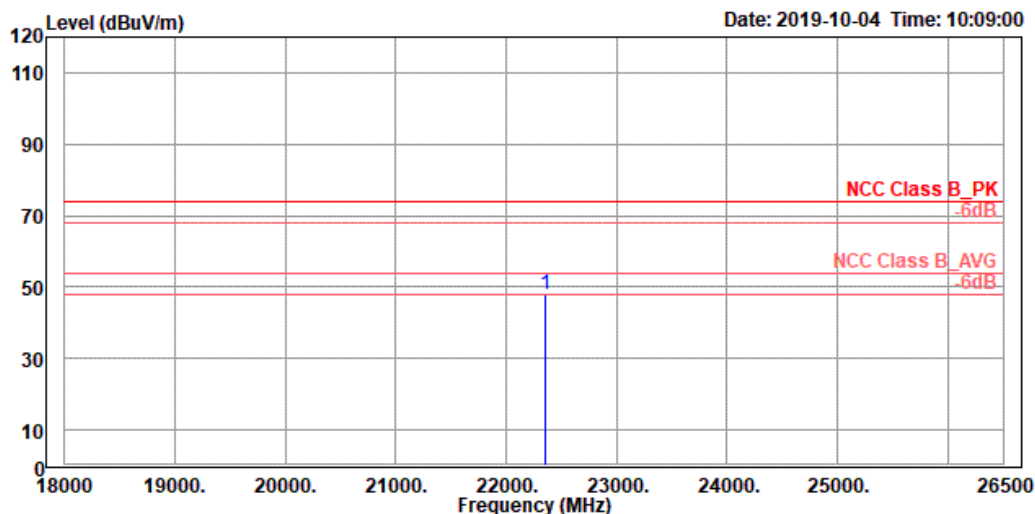


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_RX\_CH19  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq      | Level  | Read Level | Factor | Limit  | Over Limit | APos | TPos | Remark |
|---|-----------|--------|------------|--------|--------|------------|------|------|--------|
|   | MHz       | dBuV/m | dBuV       | dB/m   | dBuV/m | dB         | cm   | deg  |        |
| 1 | 22351.050 | 47.96  | 46.21      | 1.75   | 74.00  | -26.04     | 100  | 312  | Peak   |

## Spurious Emissions, RX Mode, 30M-1G




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

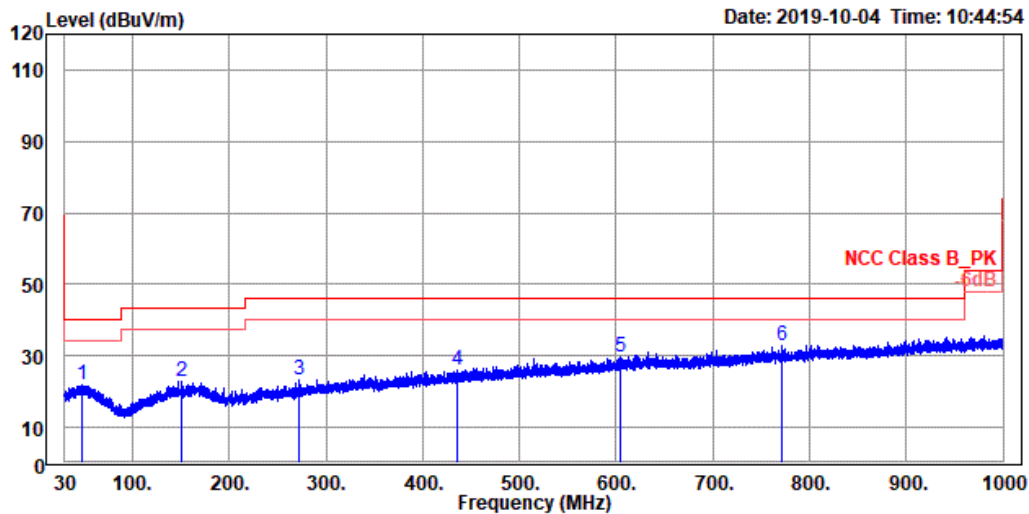

Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK vertical  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_RX\_CH19  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|---------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 47.751  | 21.77  | 29.30      | -7.53  | 40.00      | -18.23     | 200  | 138  | QP     |
| 2 | 151.153 | 22.85  | 30.52      | -7.67  | 43.50      | -20.65     | 400  | 31   | QP     |
| 3 | 272.597 | 23.47  | 30.78      | -7.31  | 46.00      | -22.53     | 134  | 360  | QP     |
| 4 | 436.236 | 25.92  | 29.89      | -3.97  | 46.00      | -20.08     | 352  | 360  | QP     |
| 5 | 604.531 | 29.55  | 30.72      | -1.17  | 46.00      | -16.45     | 300  | 88   | QP     |
| 6 | 771.953 | 32.94  | 31.48      | 1.46   | 46.00      | -13.06     | 100  | 286  | QP     |

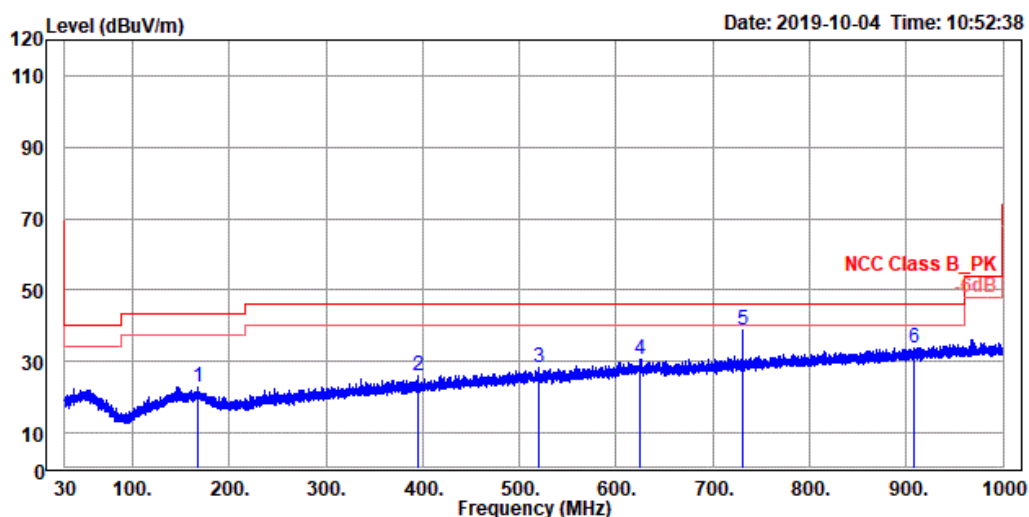


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK horizontal  
Test Engineer: Kay Wu  
Product : 自行車訓練台  
Model NO : T2980  
Mode : LE\_RX\_CH19  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq    | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|---------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz     | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 167.255 | 22.71  | 29.93      | -7.22  | 43.50      | -20.79     | 377  | 360  | QP     |
| 2 | 394.817 | 26.08  | 30.86      | -4.78  | 46.00      | -19.92     | 300  | 96   | QP     |
| 3 | 520.626 | 28.22  | 31.01      | -2.79  | 46.00      | -17.78     | 400  | 241  | QP     |
| 4 | 625.095 | 30.63  | 31.42      | -0.79  | 46.00      | -15.37     | 200  | 44   | QP     |
| 5 | 731.116 | 38.59  | 37.86      | 0.73   | 46.00      | -7.41      | 300  | 360  | QP     |
| 6 | 908.335 | 33.76  | 30.31      | 3.45   | 46.00      | -12.24     | 300  | 96   | QP     |

## Spurious Emissions, RX Mode, 9K-30M




TUV Rheinland Waiwan Ltd.  
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel:+886-2172-1000 Fax:+886-2172-1322

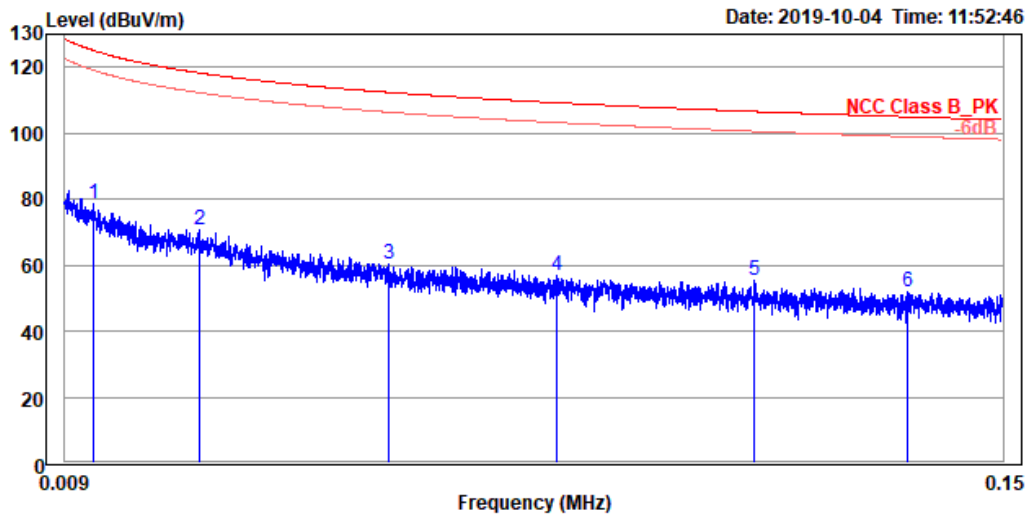

Site : 3m\_Semi-Anechoic Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : Electromagnetic brake unit  
Model NO : Flux 2  
Mode : LE\_RX\_CH19  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq  | Level  | Read  | Limit  | Over   | APos   | TPos | Remark |
|---|-------|--------|-------|--------|--------|--------|------|--------|
|   | MHz   | dBuV/m | Level | Factor | Line   | Limit  |      |        |
|   |       |        | dBuV  | dB/m   | dBuV/m | dB     | cm   | deg    |
| 1 | 0.013 | 78.78  | 2.05  | 76.73  | 125.08 | -46.30 | 100  | 133 QP |
| 2 | 0.029 | 70.73  | -0.17 | 70.90  | 118.30 | -47.57 | 100  | 257 QP |
| 3 | 0.058 | 60.09  | -3.90 | 63.99  | 112.39 | -52.30 | 100  | 132 QP |
| 4 | 0.083 | 56.76  | -4.25 | 61.01  | 109.22 | -52.46 | 100  | 298 QP |
| 5 | 0.113 | 55.42  | -3.09 | 58.51  | 106.56 | -51.14 | 100  | 107 QP |
| 6 | 0.136 | 51.99  | -5.20 | 57.19  | 104.95 | -52.96 | 100  | 331 QP |

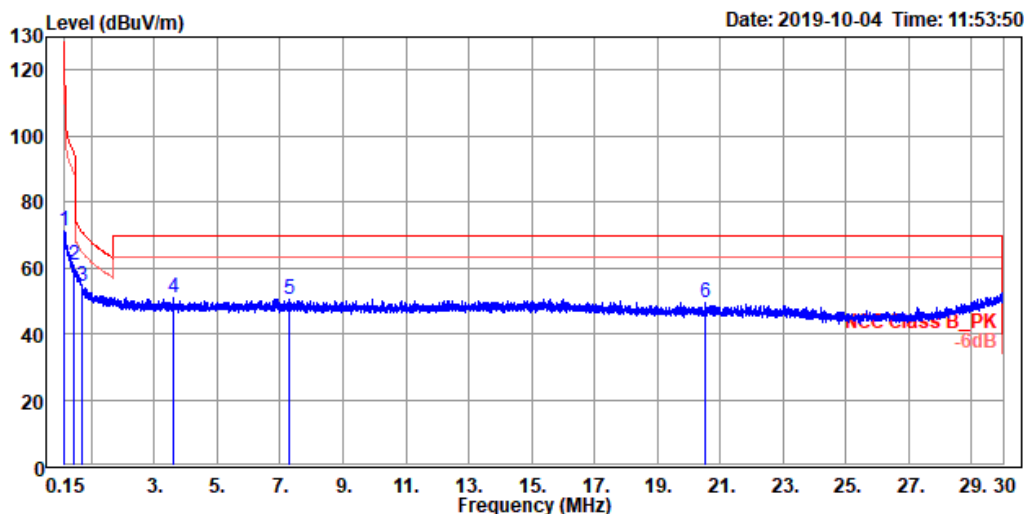


Site : 3m\_Semi-Anechoic\_Chamber(966\_C)  
Condition : NCC Class B\_PK Vertical  
Test Engineer: Kay Wu  
Product : Electromagnetic brake unit  
Model NO : Flux 2  
Mode : LE\_RX\_CH19  
Test Rating : 230Vac/50Hz  
Tmp/Hum : 26°C/63.5%

|   | Freq   | Level  | Read Level | Factor | Limit Line | Over Limit | APos | TPos | Remark |
|---|--------|--------|------------|--------|------------|------------|------|------|--------|
|   | MHz    | dBuV/m | dBuV       | dB/m   | dBuV/m     | dB         | cm   | deg  |        |
| 1 | 0.150  | 71.02  | 14.67      | 56.35  | 104.08     | -33.06     | 100  | 312  | QP     |
| 2 | 0.425  | 60.87  | 12.89      | 47.98  | 95.04      | -34.17     | 100  | 88   | QP     |
| 3 | 0.708  | 54.44  | 11.43      | 43.01  | 70.60      | -16.16     | 100  | 251  | QP     |
| 4 | 3.598  | 51.13  | 12.85      | 38.28  | 69.50      | -18.37     | 100  | 197  | QP     |
| 5 | 7.266  | 50.18  | 11.90      | 38.28  | 69.50      | -19.32     | 100  | 280  | QP     |
| 6 | 20.547 | 49.66  | 13.51      | 36.15  | 69.50      | -19.84     | 100  | 302  | QP     |




TUV Rheinland Taiwan Ltd.  
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105  
Tel:+886-2172-7000 Fax:+886-2528-0018

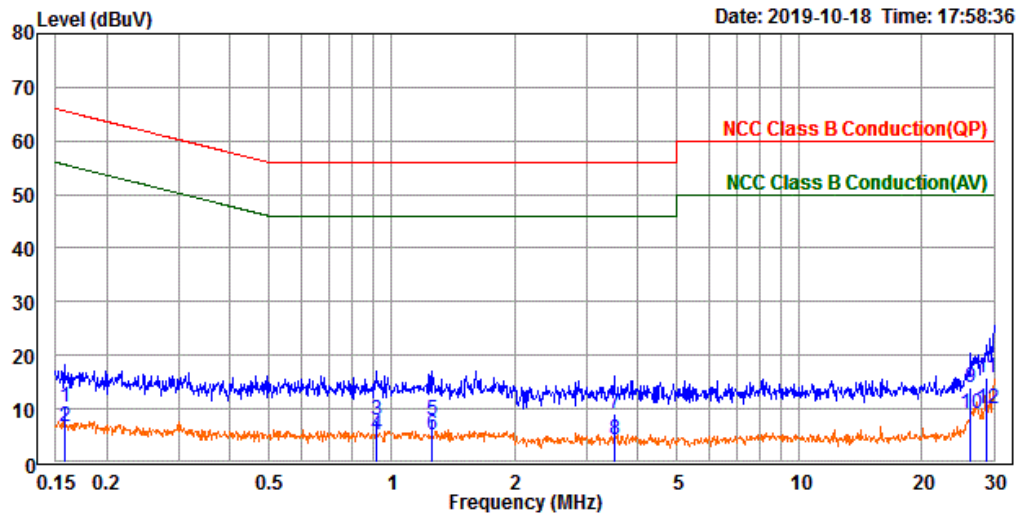

Trace: 1

Site : Conduction room  
Condition : NCC Class B Conduction(QP) line1  
Test Engineer: Simon Tsai  
Product : 自行車訓練台  
Model No. : T2980  
Power setting : 4db  
Test Rating : 230V 50Hz  
Tmp/Hum : 21.9°C / 43%  
Memo : BLE 2440MHz


|    | Freq   | Read Level | Factor | Level | Limit Line | Over Limit | Remark  |
|----|--------|------------|--------|-------|------------|------------|---------|
|    | MHz    | dBuV       | dB     | dBuV  | dBuV       | dB         |         |
| 1  | 0.158  | 0.65       | 9.61   | 10.26 | 65.59      | -55.33     | QP      |
| 2  | 0.158  | -2.81      | 9.61   | 6.80  | 55.59      | -48.79     | Average |
| 3  | 0.916  | -1.60      | 9.62   | 8.02  | 56.00      | -47.98     | QP      |
| 4  | 0.916  | -4.49      | 9.62   | 5.13  | 46.00      | -40.87     | Average |
| 5  | 1.254  | -1.68      | 9.62   | 7.94  | 56.00      | -48.06     | QP      |
| 6  | 1.254  | -4.55      | 9.62   | 5.07  | 46.00      | -40.93     | Average |
| 7  | 3.518  | -0.67      | 9.67   | 9.00  | 56.00      | -47.00     | QP      |
| 8  | 3.518  | -5.34      | 9.67   | 4.33  | 46.00      | -41.67     | Average |
| 9  | 26.354 | 4.23       | 9.77   | 14.00 | 60.00      | -46.00     | QP      |
| 10 | 26.354 | -0.74      | 9.77   | 9.03  | 50.00      | -40.97     | Average |
| 11 | 28.684 | 6.07       | 9.76   | 15.83 | 60.00      | -44.17     | QP      |
| 12 | 28.684 | 0.22       | 9.76   | 9.98  | 50.00      | -40.02     | Average |

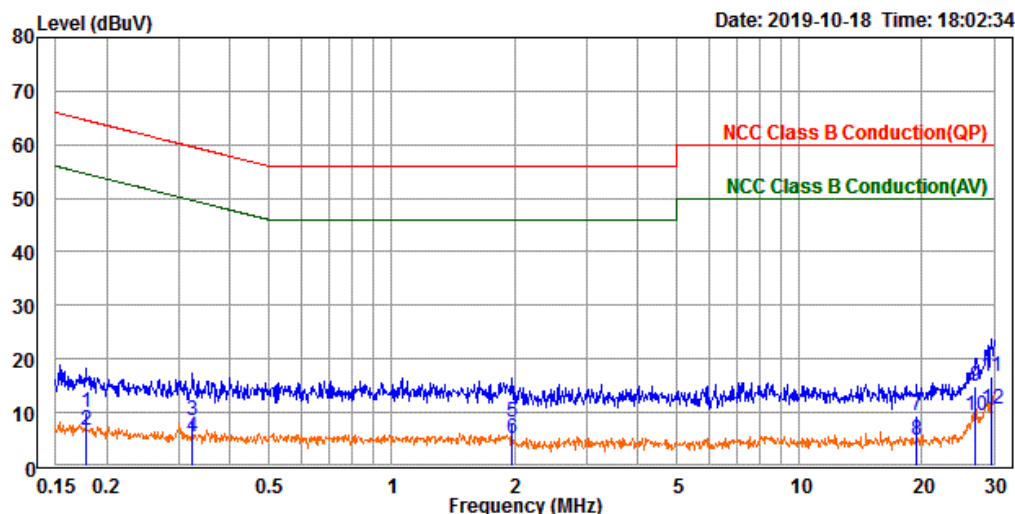

Trace: 1

Site : Conduction room  
Condition : NCC Class B Conduction(QP) neutral  
Test Engineer: Simon Tsai  
Product : 自行車訓練台  
Model No. : T2980  
Powersetting : 4db  
Test Rating : 230V 50Hz  
Tmp/Hum : 21.9°C/43%  
Memo : BLE 2440MHz


|    | Freq   | Read  |        | Limit | Over  |                |
|----|--------|-------|--------|-------|-------|----------------|
|    | MHz    | Level | Factor | Level | Line  | Limit Remark   |
|    | MHz    | dBuV  | dB     | dBuV  | dBuV  | dB             |
| 1  | 0.178  | 0.44  | 9.62   | 10.06 | 64.59 | -54.53 QP      |
| 2  | 0.178  | -3.02 | 9.62   | 6.60  | 54.59 | -47.99 Average |
| 3  | 0.325  | -1.17 | 9.62   | 8.45  | 59.58 | -51.13 QP      |
| 4  | 0.325  | -4.21 | 9.62   | 5.41  | 49.58 | -44.17 Average |
| 5  | 1.964  | -1.43 | 9.65   | 8.22  | 56.00 | -47.78 QP      |
| 6  | 1.964  | -4.55 | 9.65   | 5.10  | 46.00 | -40.90 Average |
| 7  | 19.444 | -0.52 | 9.83   | 9.31  | 60.00 | -50.69 QP      |
| 8  | 19.444 | -5.10 | 9.83   | 4.73  | 50.00 | -45.27 Average |
| 9  | 27.019 | 5.15  | 9.84   | 14.99 | 60.00 | -45.01 QP      |
| 10 | 27.019 | -0.45 | 9.84   | 9.39  | 50.00 | -40.61 Average |
| 11 | 29.555 | 6.89  | 9.84   | 16.73 | 60.00 | -43.27 QP      |
| 12 | 29.555 | 0.73  | 9.84   | 10.57 | 50.00 | -39.43 Average |

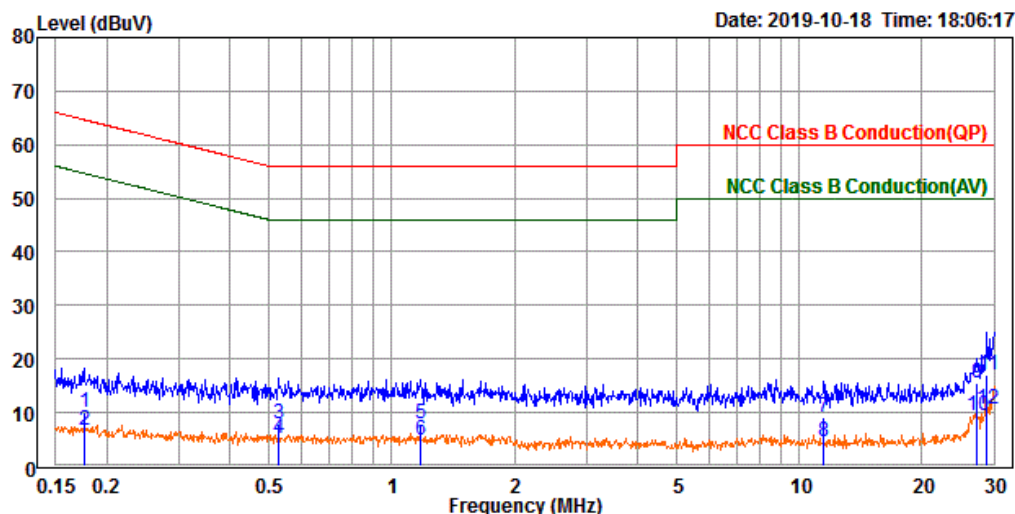

Trace: 1

Site : Conduction room  
Condition : NCC Class B Conduction(QP) neutral  
Test Engineer: Simon Tsai  
Product : 自行車訓練台  
Model No. : T2980  
Powersetting : 4db  
Test Rating : 230V 50Hz  
Tmp/Hum : 21.9°C/43%  
Memo : ANT+ 2442MHz

|    | Freq   | Read Level | Factor | Level | Limit Line | Over Limit | Remark  |
|----|--------|------------|--------|-------|------------|------------|---------|
|    | MHz    | dBuV       | dB     | dBuV  | dBuV       | dB         |         |
| 1  | 0.176  | 0.51       | 9.62   | 10.13 | 64.68      | -54.55     | QP      |
| 2  | 0.176  | -2.98      | 9.62   | 6.64  | 54.68      | -48.04     | Average |
| 3  | 0.527  | -1.69      | 9.63   | 7.94  | 56.00      | -48.06     | QP      |
| 4  | 0.527  | -4.46      | 9.63   | 5.17  | 46.00      | -40.83     | Average |
| 5  | 1.181  | -1.78      | 9.63   | 7.85  | 56.00      | -48.15     | QP      |
| 6  | 1.181  | -4.62      | 9.63   | 5.01  | 46.00      | -40.99     | Average |
| 7  | 11.464 | -0.66      | 9.75   | 9.09  | 60.00      | -50.91     | QP      |
| 8  | 11.464 | -5.22      | 9.75   | 4.53  | 50.00      | -45.47     | Average |
| 9  | 27.154 | 5.53       | 9.84   | 15.37 | 60.00      | -44.63     | QP      |
| 10 | 27.154 | -0.44      | 9.84   | 9.40  | 50.00      | -40.60     | Average |
| 11 | 28.827 | 7.15       | 9.84   | 16.99 | 60.00      | -43.01     | QP      |
| 12 | 28.827 | 0.93       | 9.84   | 10.77 | 50.00      | -39.23     | Average |

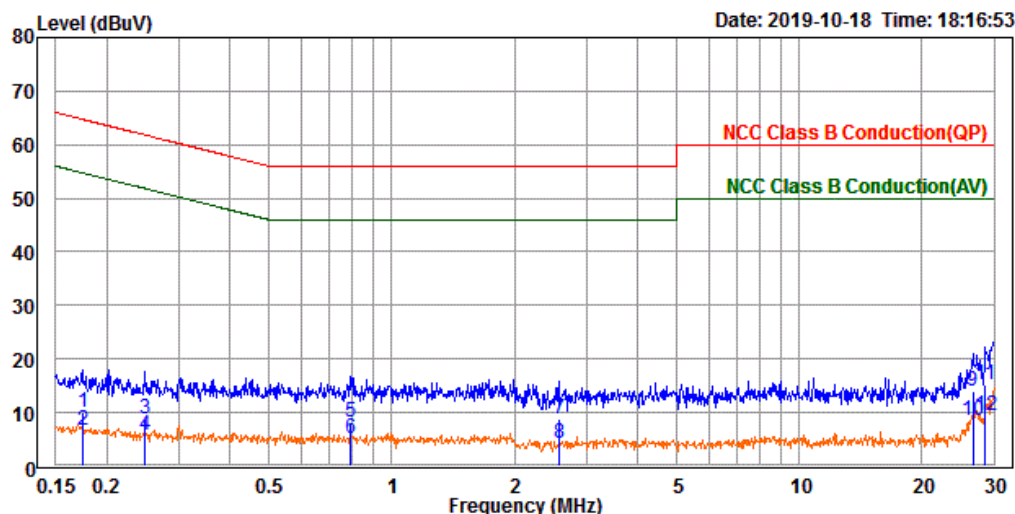

Trace: 1

Site : Conduction room  
Condition : NCC Class B Conduction(QP) line1  
Test Engineer: Simon Tsai  
Product : 自行車訓練台  
Model No. : T2980  
Power setting : 4db  
Test Rating : 230V 50Hz  
Tmp/Hum : 21.9°C/43%  
Memo : ANT+ 2442MHz

|    | Freq   | Read Level | Factor | Level | Limit Line | Over Limit | Remark  |
|----|--------|------------|--------|-------|------------|------------|---------|
|    | MHz    | dBuV       | dB     | dBuV  | dBuV       | dB         |         |
| 1  | 0.174  | 0.51       | 9.61   | 10.12 | 64.76      | -54.64     | QP      |
| 2  | 0.174  | -2.88      | 9.61   | 6.73  | 54.76      | -48.03     | Average |
| 3  | 0.248  | -0.84      | 9.61   | 8.77  | 61.82      | -53.05     | QP      |
| 4  | 0.248  | -3.89      | 9.61   | 5.72  | 51.82      | -46.10     | Average |
| 5  | 0.789  | -1.43      | 9.62   | 8.19  | 56.00      | -47.81     | QP      |
| 6  | 0.789  | -4.51      | 9.62   | 5.11  | 46.00      | -40.89     | Average |
| 7  | 2.570  | -0.89      | 9.65   | 8.76  | 56.00      | -47.24     | QP      |
| 8  | 2.570  | -5.50      | 9.65   | 4.15  | 46.00      | -41.85     | Average |
| 9  | 26.618 | 4.30       | 9.77   | 14.07 | 60.00      | -45.93     | QP      |
| 10 | 26.618 | -1.18      | 9.77   | 8.59  | 50.00      | -41.41     | Average |
| 11 | 28.541 | 5.51       | 9.76   | 15.27 | 60.00      | -44.73     | QP      |
| 12 | 28.541 | -0.20      | 9.76   | 9.56  | 50.00      | -40.44     | Average |