


Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5690MHz with OAW-AP1322	

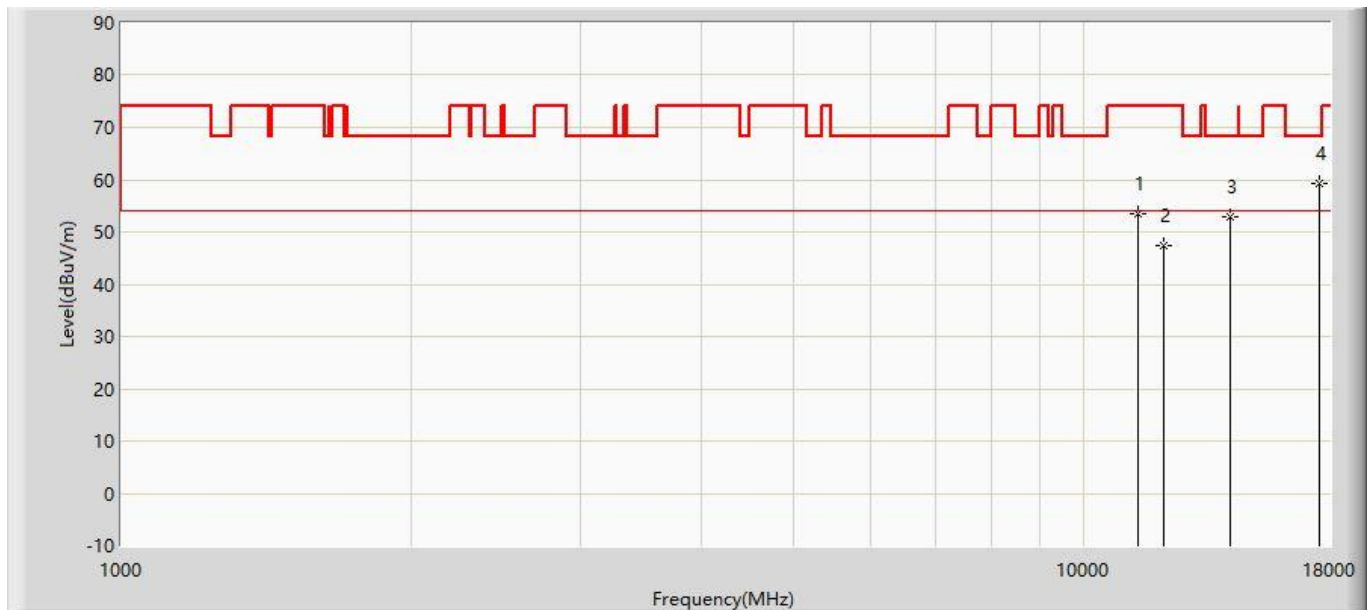


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11387.000	53.489	35.545	-20.511	74.000	17.944	PK
2			12084.000	47.498	29.680	-26.502	74.000	17.818	PK
3			14158.000	52.968	32.064	-15.232	68.200	20.904	PK
4		*	17558.000	59.318	28.935	-8.882	68.200	30.383	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5690MHz with OAW-AP1322	

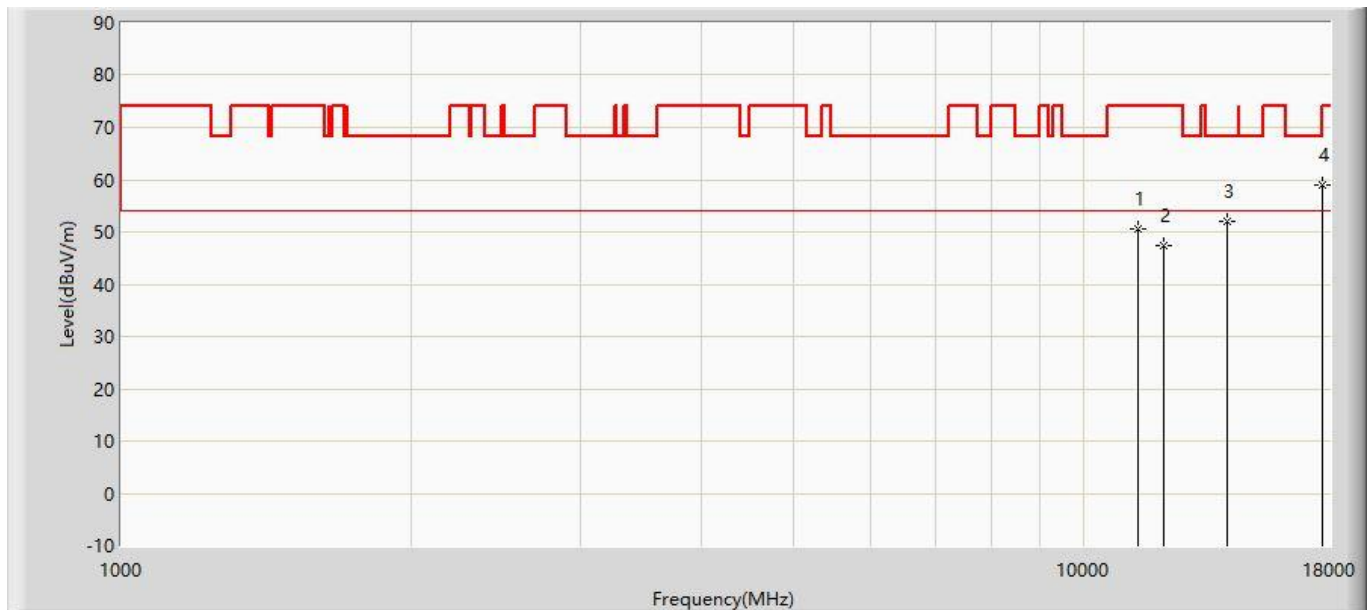


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11387.000	50.670	32.726	-23.330	74.000	17.944	PK
2			12084.000	47.498	29.680	-26.502	74.000	17.818	PK
3			14090.000	52.164	31.210	-16.036	68.200	20.954	PK
4		*	17660.000	58.905	28.271	-9.295	68.200	30.634	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz with OAW-AP1322	

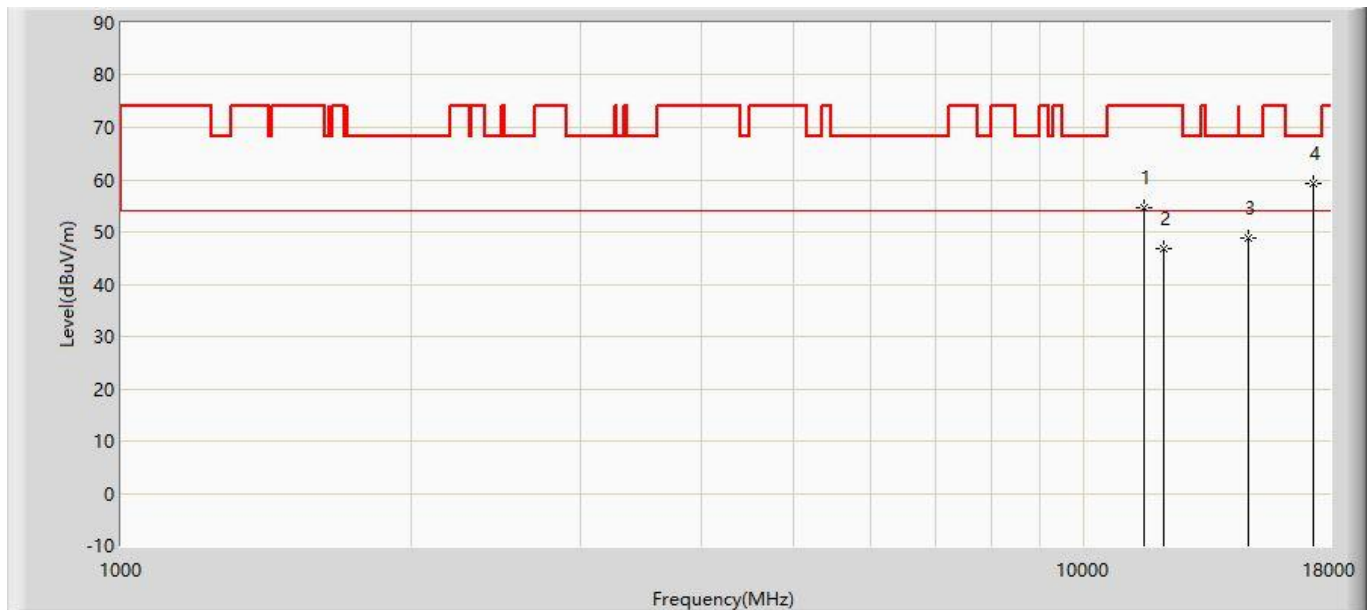


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11557.000	54.712	36.688	-19.288	74.000	18.024	PK
2			12118.000	46.741	28.925	-27.259	74.000	17.816	PK
3			14821.000	48.912	28.170	-19.288	68.200	20.742	PK
4		*	17303.000	59.317	30.941	-8.883	68.200	28.376	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz with OAW-AP1322	

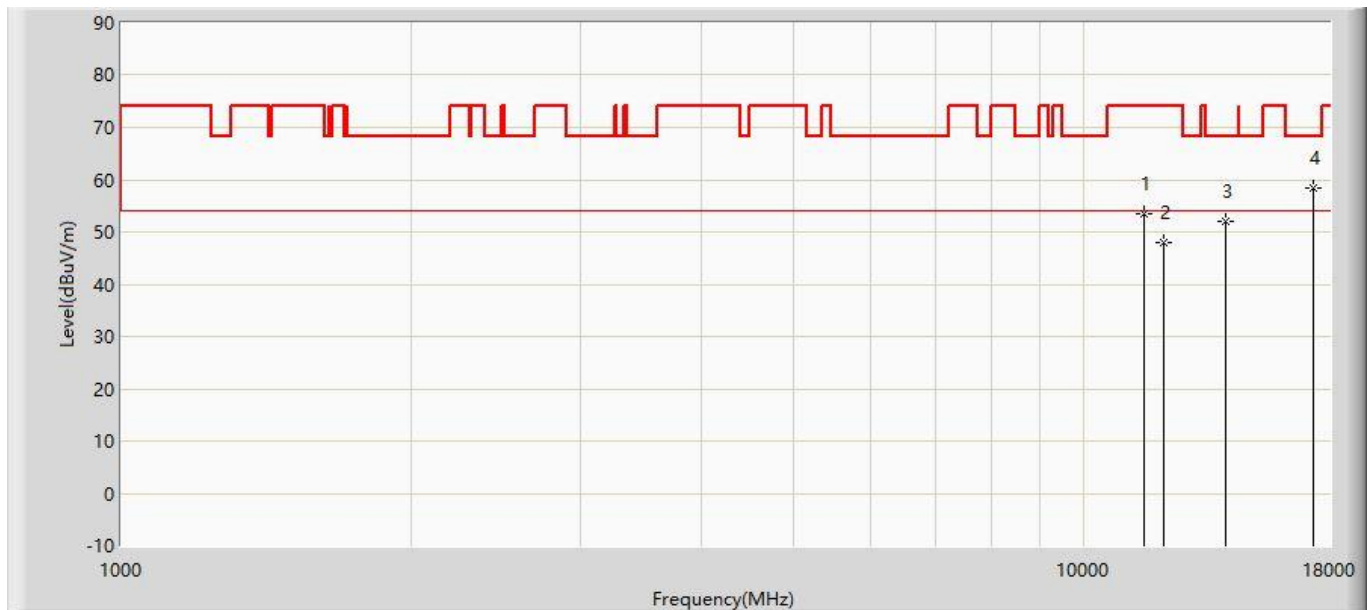


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11557.000	53.464	35.440	-20.536	74.000	18.024	PK
2			12118.000	48.049	30.233	-25.951	74.000	17.816	PK
3			14005.000	51.965	30.949	-16.235	68.200	21.016	PK
4		*	17269.000	58.438	30.384	-9.762	68.200	28.054	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE 80+80 at channel 5210MHz+5290MHz with OAW-AP1322	

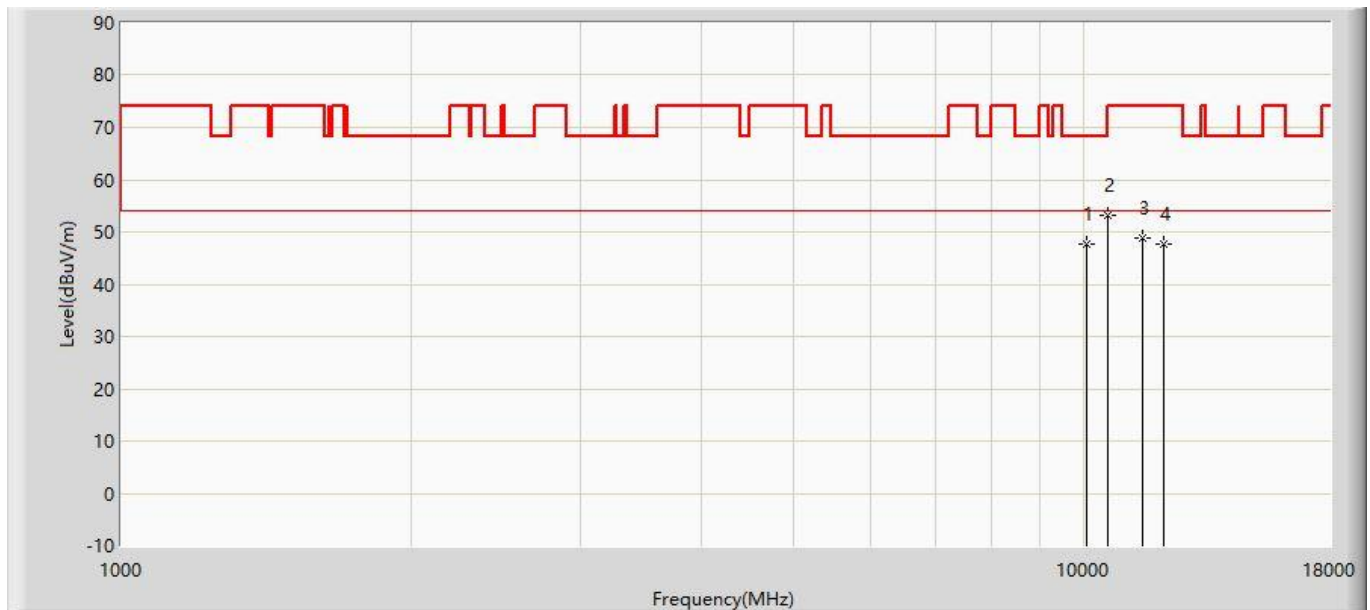


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10061.000	47.625	32.169	-20.575	68.200	15.456	PK
2		*	10588.000	53.153	36.159	-15.047	68.200	16.994	PK
3			11489.000	48.957	30.917	-25.043	74.000	18.040	PK
4			12118.000	47.644	29.828	-26.356	74.000	17.816	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE 80+80 at channel 5210MHz+5290MHz with OAW-AP1322	

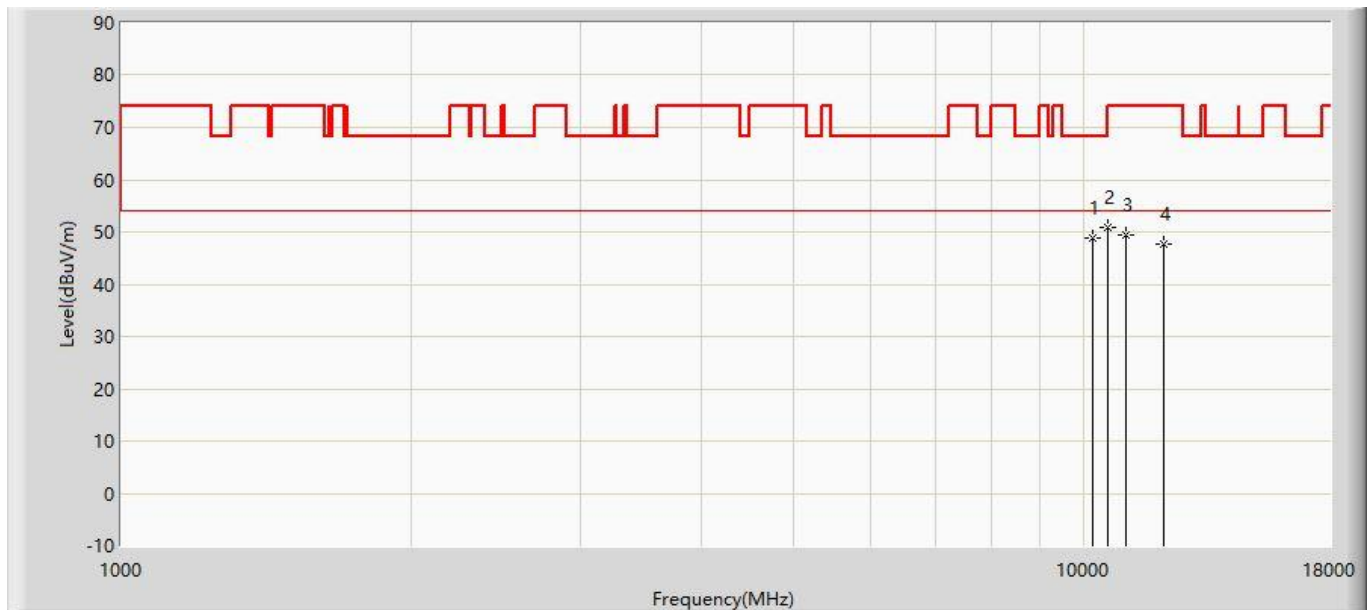


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10214.000	48.894	32.945	-19.306	68.200	15.949	PK
2		*	10588.000	50.779	33.785	-17.421	68.200	16.994	PK
3			11047.000	49.413	31.789	-24.587	74.000	17.624	PK
4			12118.000	47.644	29.828	-26.356	74.000	17.816	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE 80+80 at channel 5530MHz+5610MHz with OAW-AP1322	

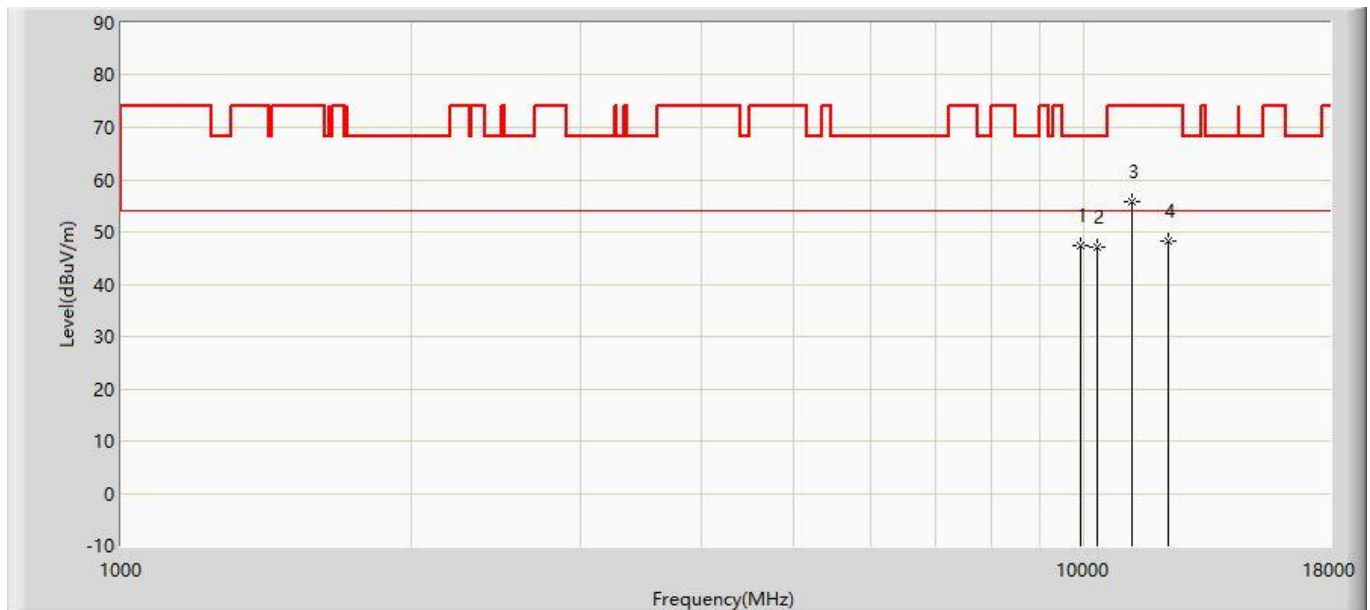


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9908.000	47.425	32.466	-20.775	68.200	14.959	PK
2			10316.000	47.084	30.806	-21.116	68.200	16.278	PK
3		*	11217.000	55.864	38.080	-18.136	74.000	17.784	PK
4			12220.000	48.373	30.559	-25.627	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE 80+80 at channel 5530MHz+5610MHz with OAW-AP1322	

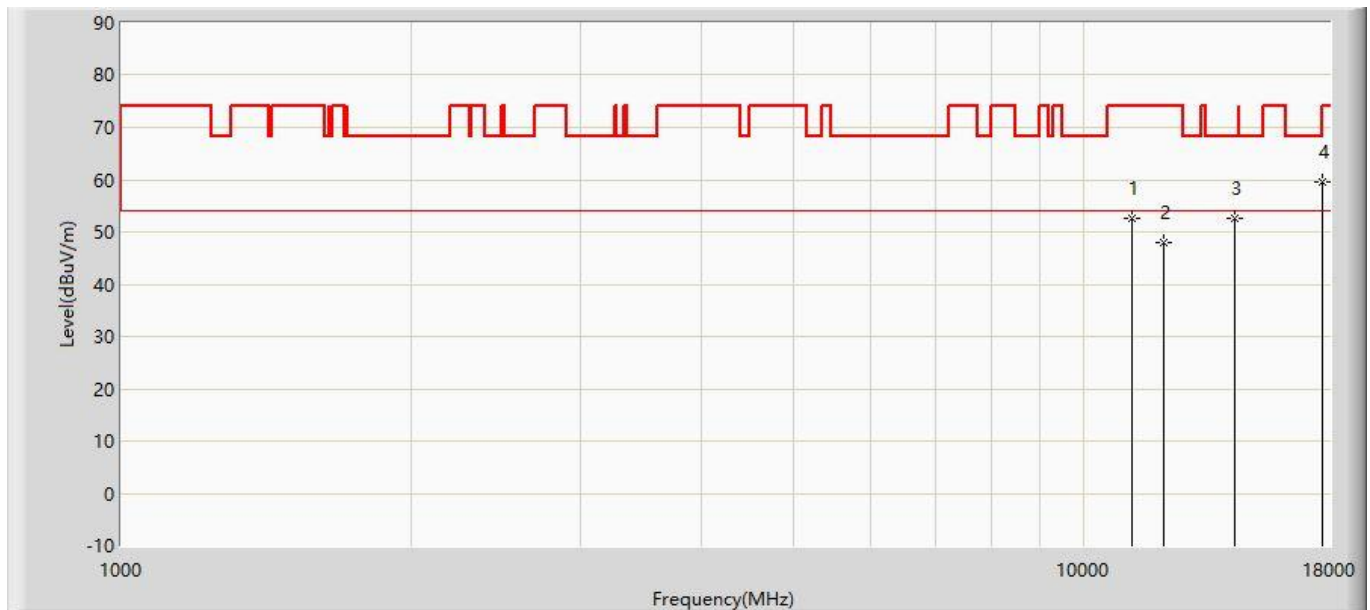


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11217.000	52.735	34.951	-21.265	74.000	17.784	PK
2			12101.000	47.973	30.156	-26.027	74.000	17.817	PK
3			14345.000	52.746	31.978	-15.454	68.200	20.768	PK
4		*	17660.000	59.700	29.066	-8.500	68.200	30.634	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

無線基地台-OAW-AP1322-Beamforming Mode

Site: AC1	Time: 2020/04/24 - 16:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz with OAW-AP1322	

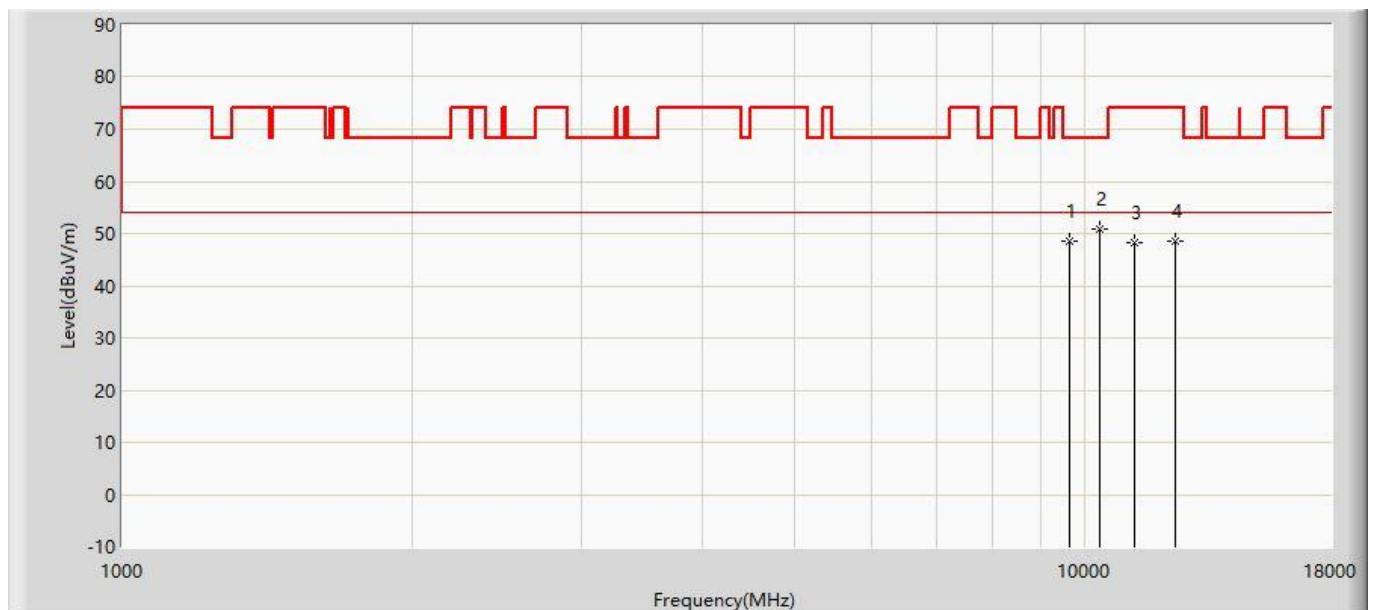


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9644.500	48.676	34.582	-19.524	68.200	14.094	PK
2	*	10358.500	50.725	34.311	-17.475	68.200	16.414	PK
3		11259.500	48.346	30.522	-25.654	74.000	17.824	PK
4		12398.500	48.689	30.881	-25.311	74.000	17.807	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz with OAW-AP1322	

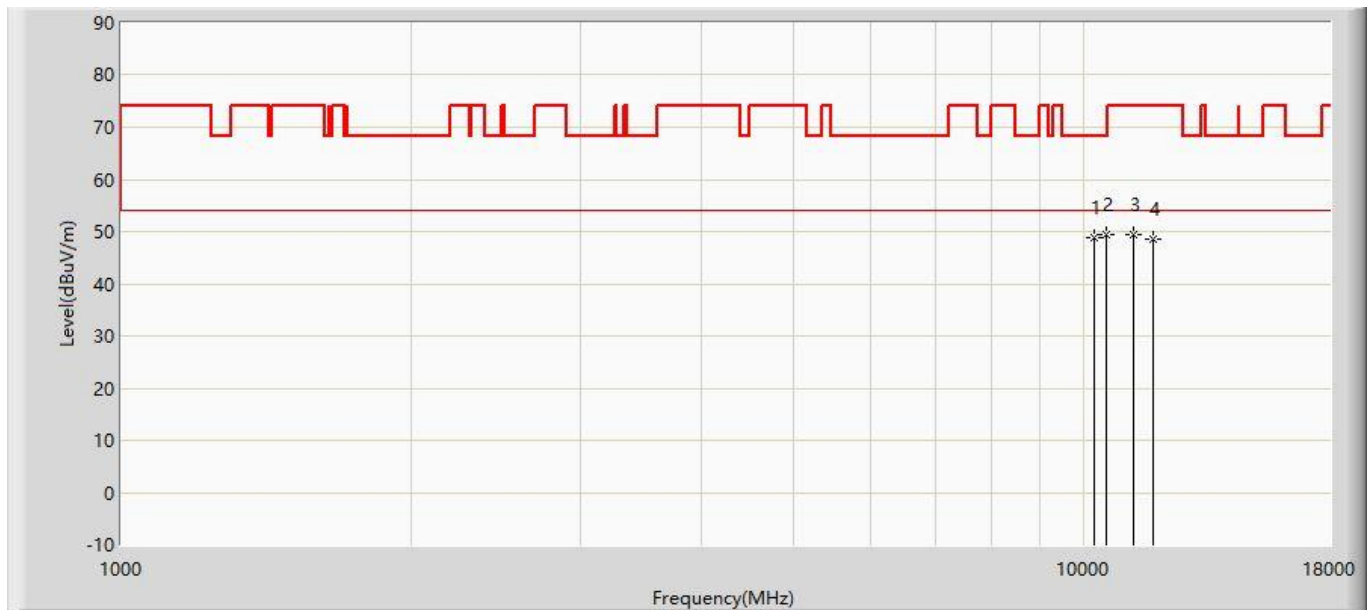


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10248.000	48.780	32.721	-19.420	68.200	16.059	PK
2	*	10554.000	49.390	32.443	-18.810	68.200	16.947	PK
3		11268.000	49.367	31.535	-24.633	74.000	17.832	PK
4		11803.500	48.544	30.634	-25.456	74.000	17.911	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5220MHz with OAW-AP1322	

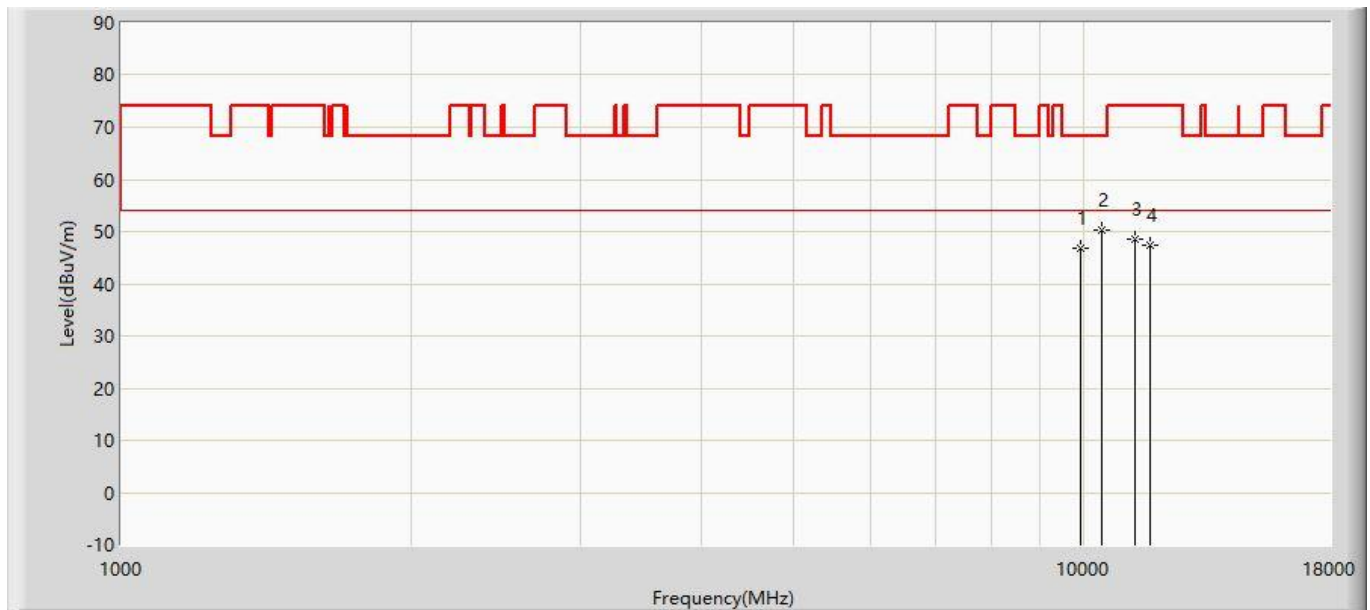


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9933.500	46.736	31.695	-21.464	68.200	15.041	PK
2	*	10443.500	50.230	33.542	-17.970	68.200	16.688	PK
3		11276.500	48.600	30.760	-25.400	74.000	17.840	PK
4		11693.000	47.429	29.468	-26.571	74.000	17.961	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5220MHz with OAW-AP1322	

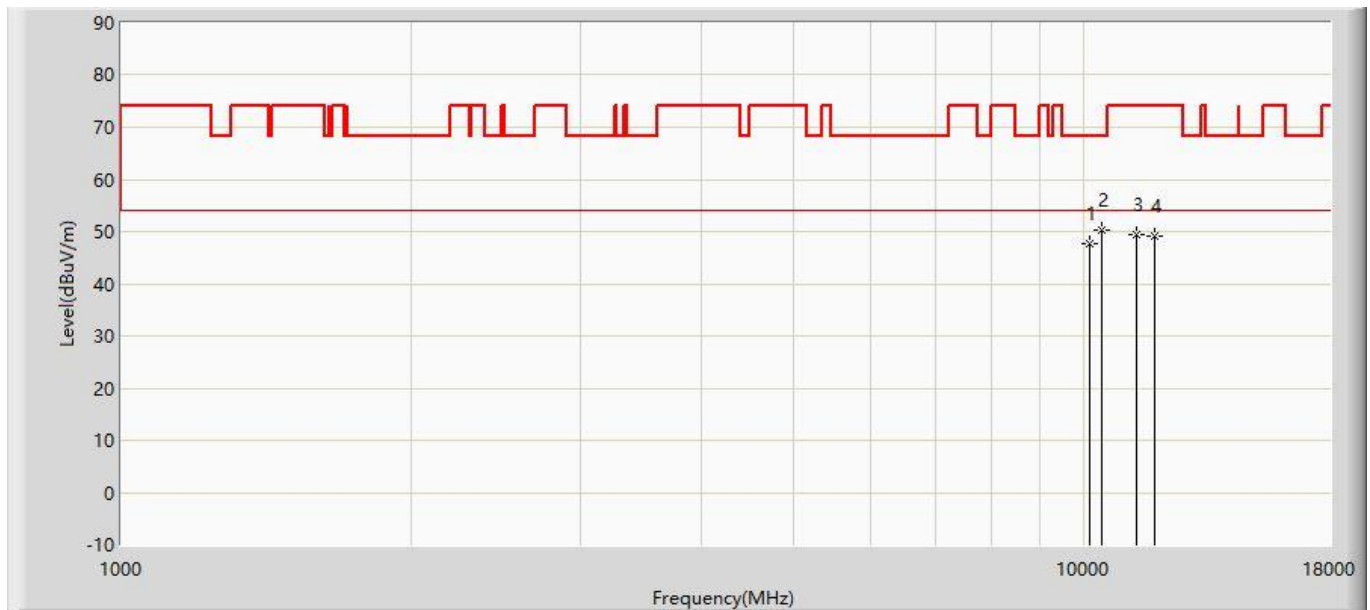


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10137.500	47.642	31.939	-20.558	68.200	15.702	PK
2	*	10443.500	50.423	33.735	-17.777	68.200	16.688	PK
3		11336.000	49.468	31.572	-24.532	74.000	17.896	PK
4		11829.000	49.017	31.118	-24.983	74.000	17.899	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5240MHz with OAW-AP1322	

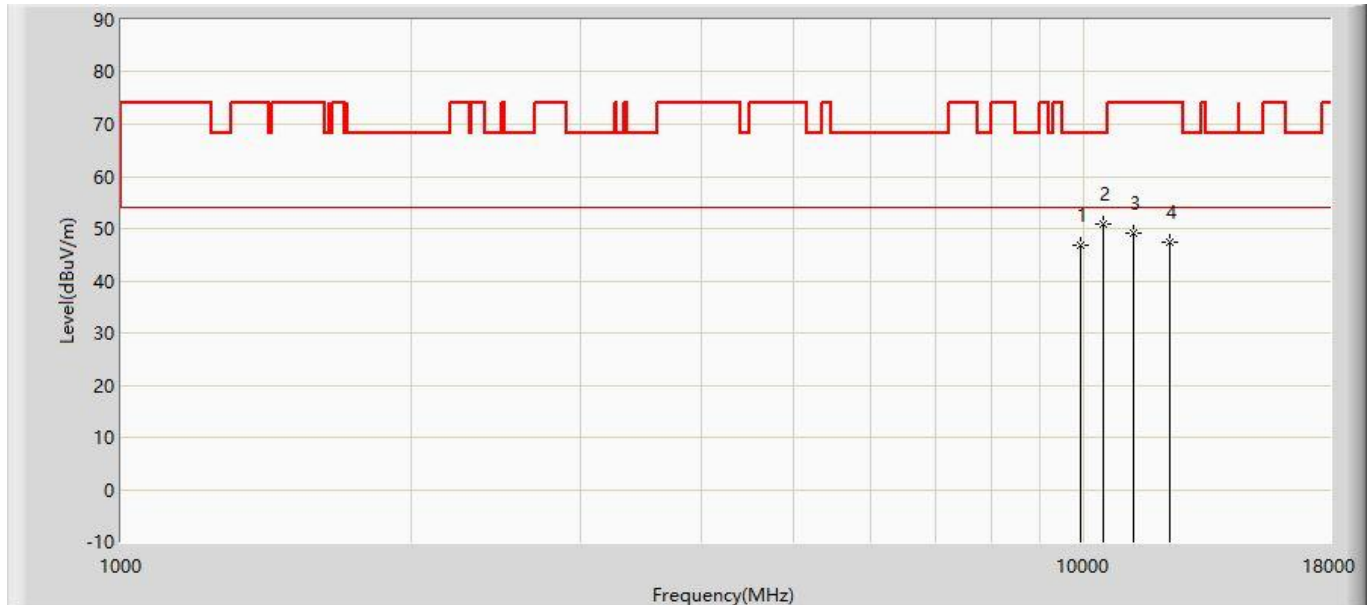


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9899.500	46.805	31.874	-21.395	68.200	14.931	PK
2	*	10477.500	50.891	34.094	-17.309	68.200	16.797	PK
3		11251.000	49.198	31.382	-24.802	74.000	17.816	PK
4		12279.500	47.365	29.554	-26.635	74.000	17.810	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5240MHz with OAW-AP1322	

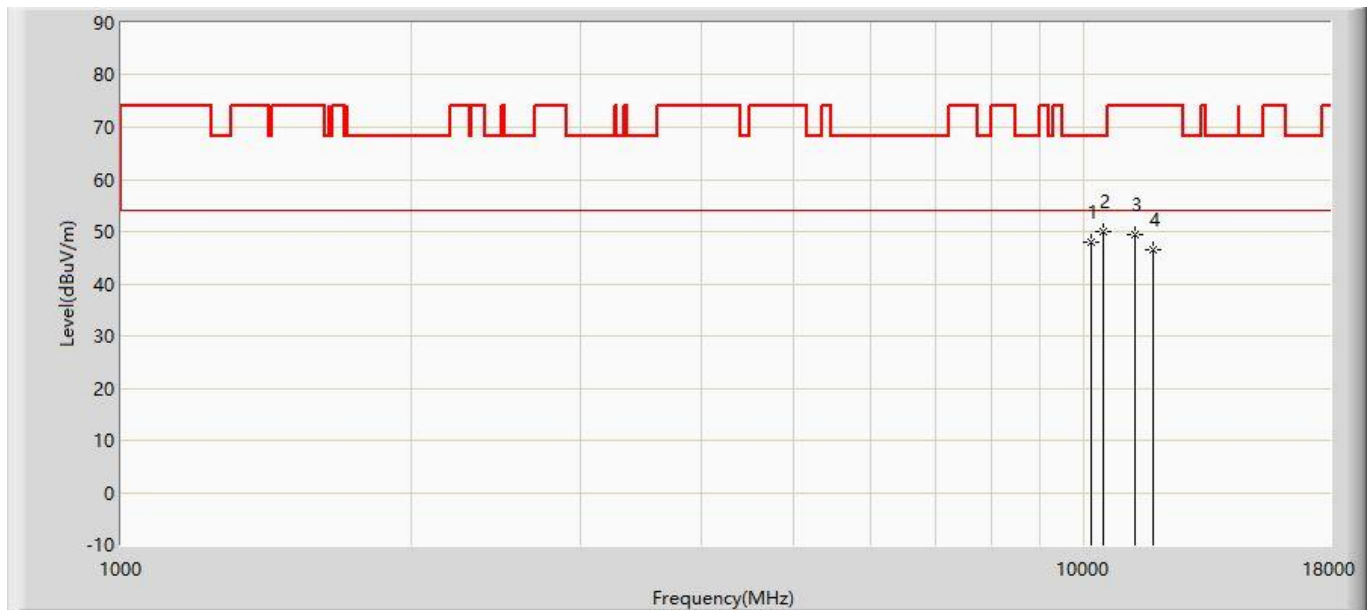


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10154.500	47.840	32.082	-20.360	68.200	15.759	PK
2	*	10477.500	50.090	33.293	-18.110	68.200	16.797	PK
3		11285.000	49.309	31.462	-24.691	74.000	17.847	PK
4		11812.000	46.496	28.590	-27.504	74.000	17.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5260MHz with OAW-AP1322	

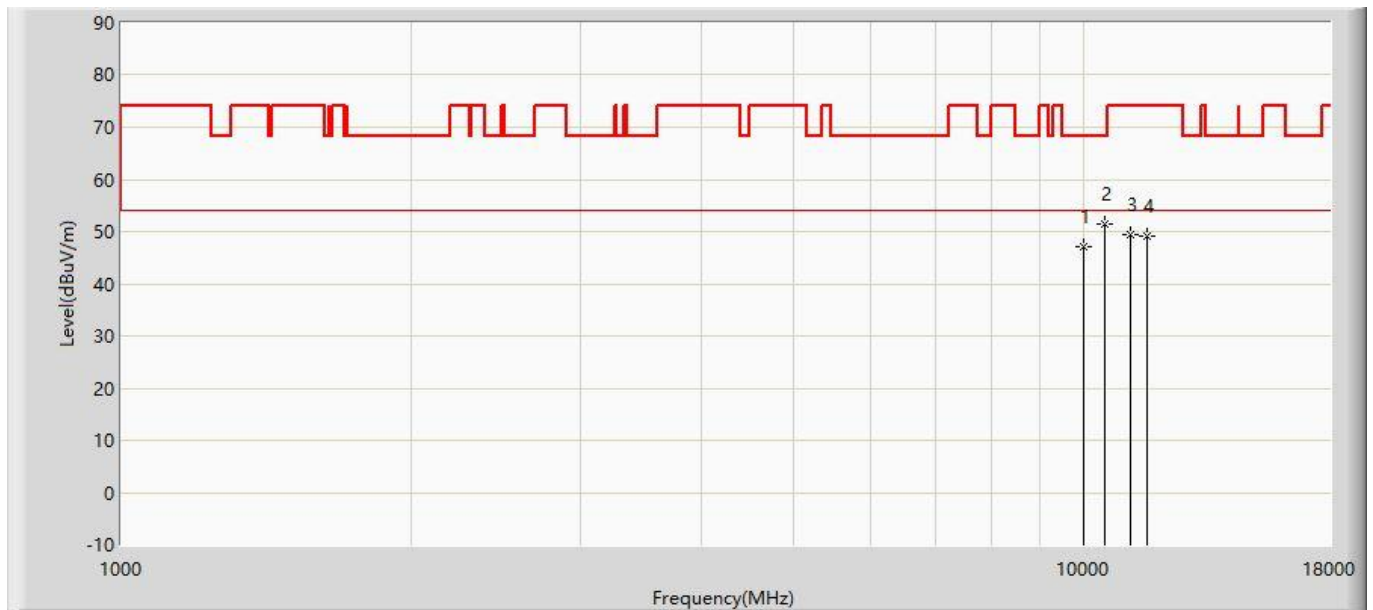


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10001.500	47.043	31.778	-21.157	68.200	15.265	PK
2	*	10520.000	51.528	34.630	-16.672	68.200	16.898	PK
3		11157.500	49.335	31.607	-24.665	74.000	17.728	PK
4		11642.000	49.104	31.119	-24.896	74.000	17.985	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5260MHz with OAW-AP1322	

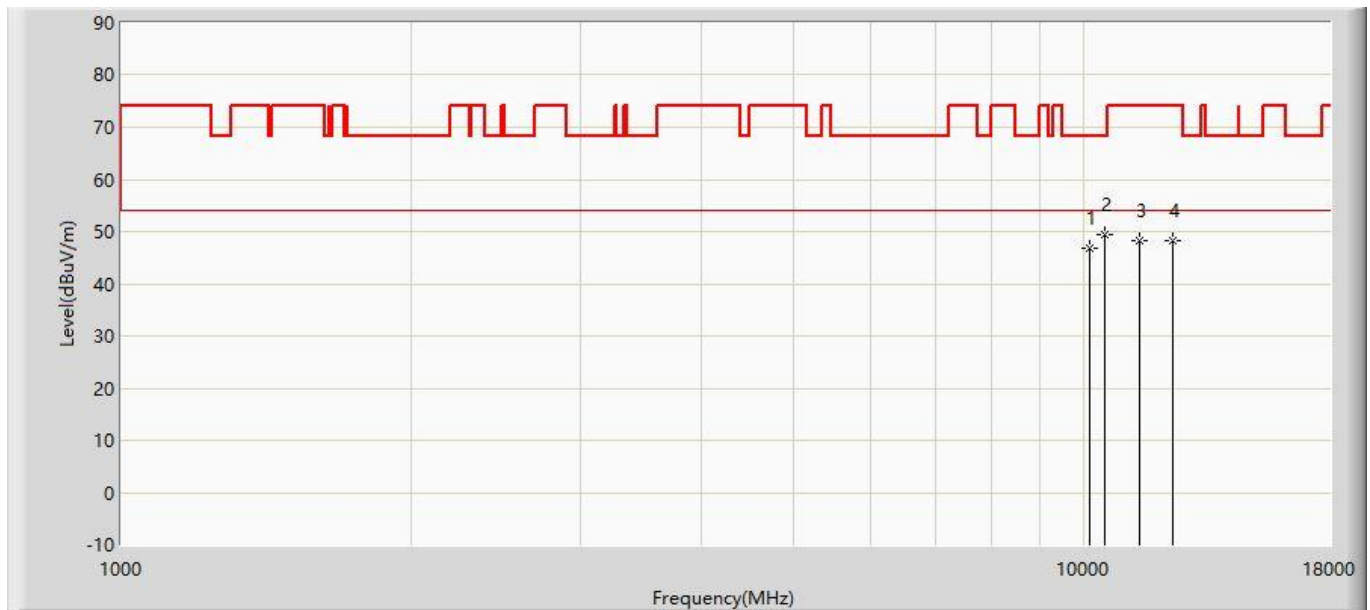


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10137.500	46.894	31.191	-21.306	68.200	15.702	PK
2	*	10520.000	49.538	32.640	-18.662	68.200	16.898	PK
3		11438.000	48.252	30.261	-25.748	74.000	17.991	PK
4		12373.000	48.320	30.511	-25.680	74.000	17.809	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5300MHz with OAW-AP1322	

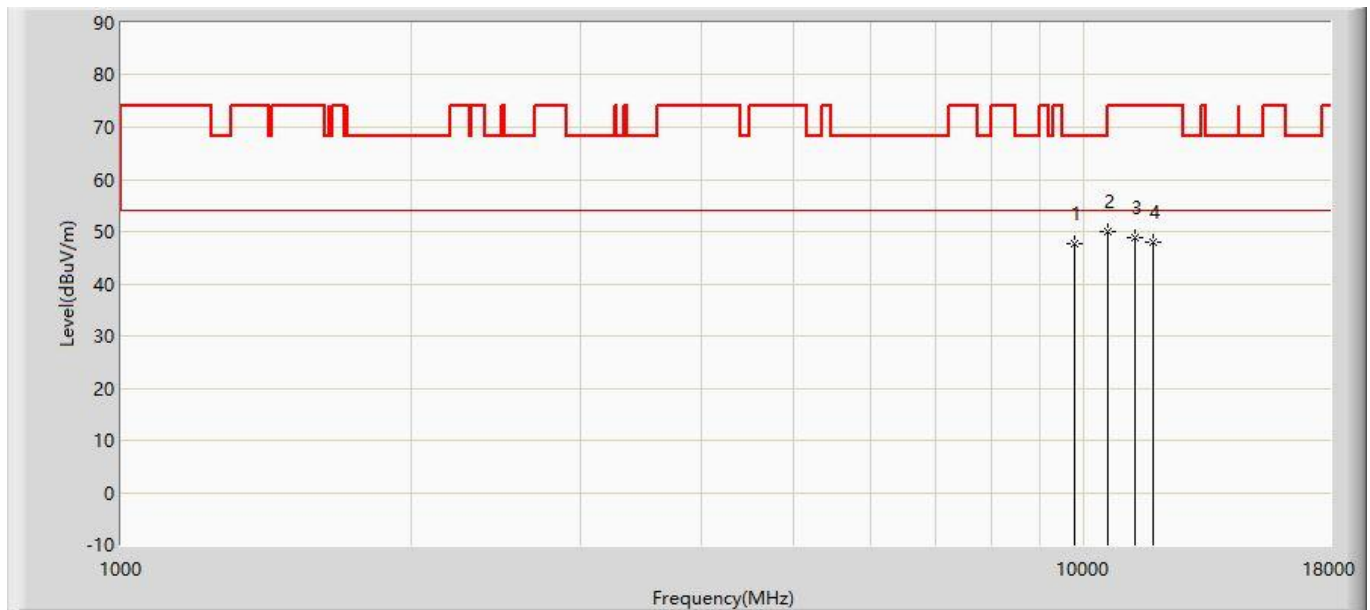


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9772.000	47.825	33.313	-20.375	68.200	14.512	PK
2	*	10596.500	50.032	33.025	-18.168	68.200	17.007	PK
3		11302.000	48.874	31.010	-25.126	74.000	17.864	PK
4		11795.000	47.985	30.071	-26.015	74.000	17.914	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5300MHz with OAW-AP1322	

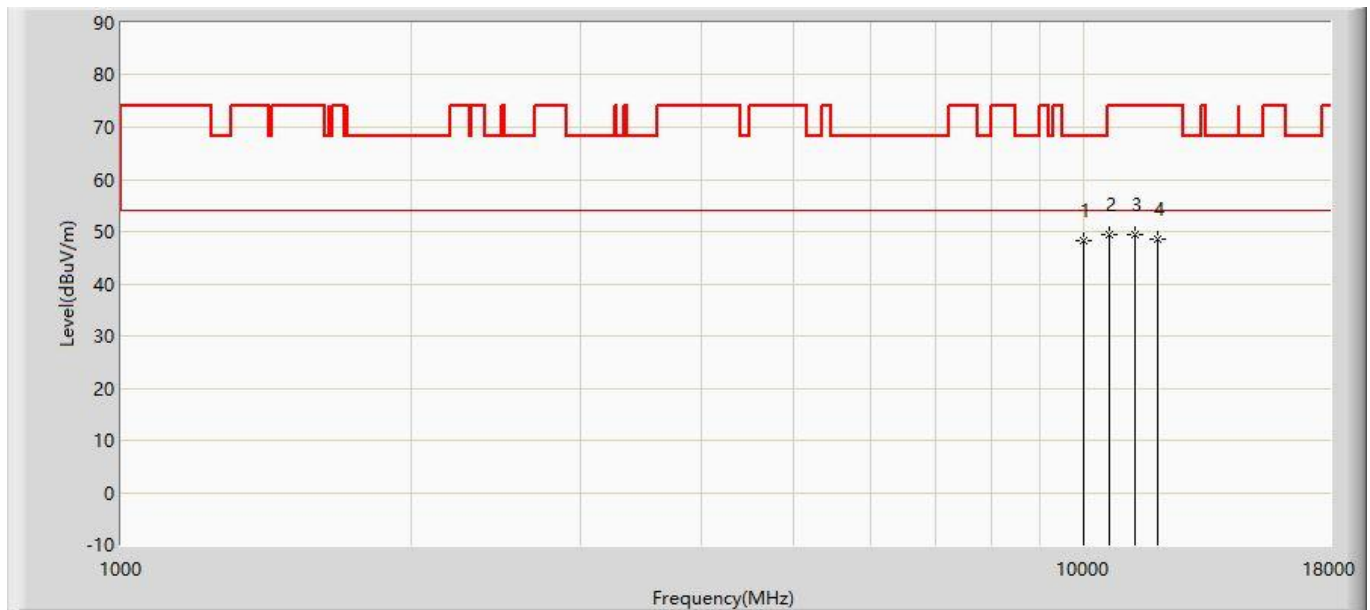


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	9976.000	48.401	33.219	-19.799	68.200	15.182	PK
2		10613.500	49.540	32.509	-24.460	74.000	17.031	PK
3		11293.500	49.390	31.534	-24.610	74.000	17.855	PK
4		11922.500	48.510	30.654	-25.490	74.000	17.856	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz with OAW-AP1322	

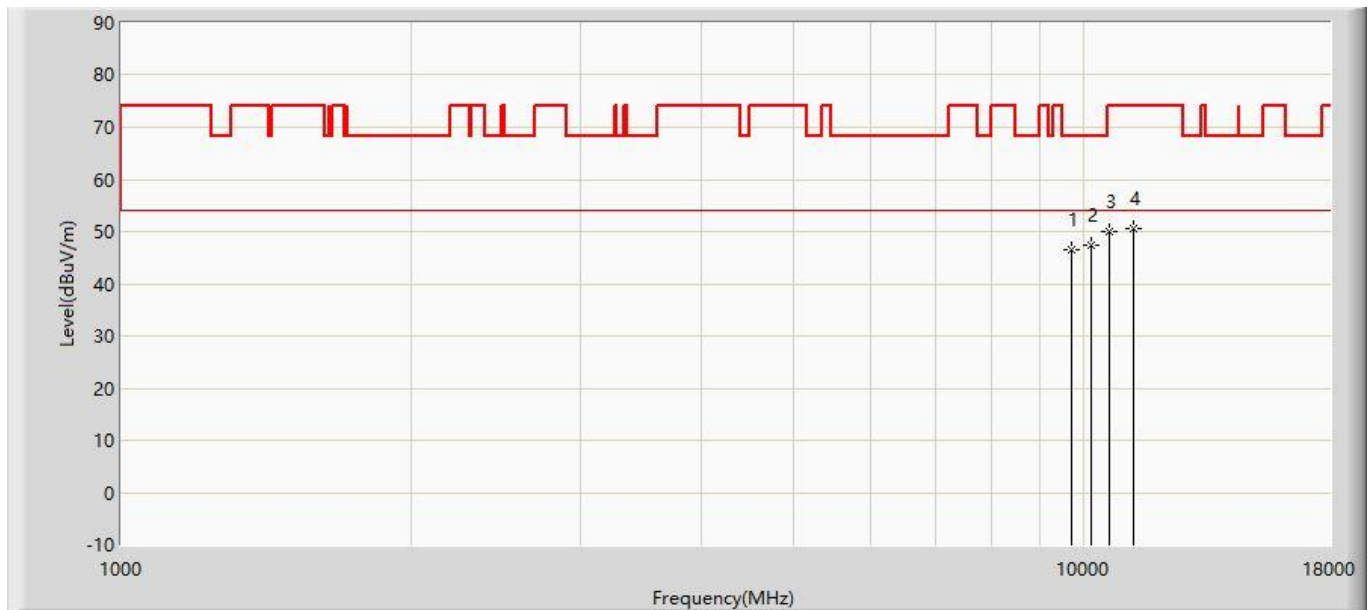


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9712.500	46.547	32.230	-21.653	68.200	14.316	PK
2	*	10163.000	47.412	31.627	-20.788	68.200	15.785	PK
3		10639.000	50.132	33.064	-23.868	74.000	17.068	PK
4		11268.000	50.472	32.640	-23.528	74.000	17.832	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz with OAW-AP1322	

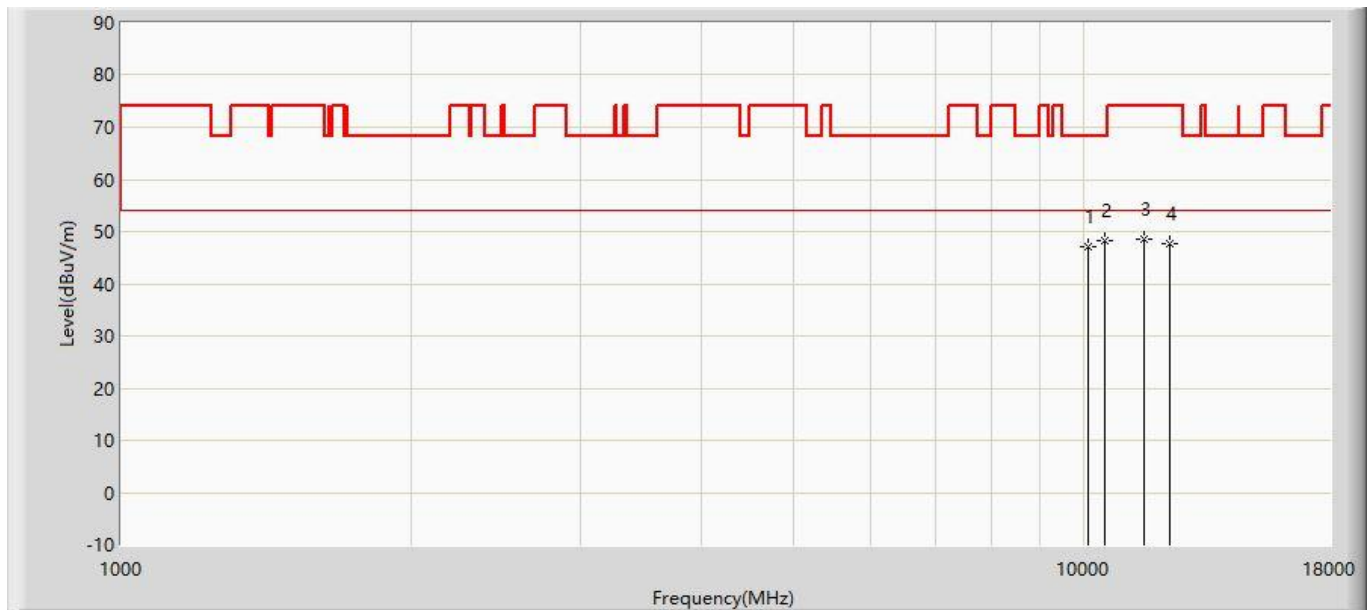


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10086.500	47.134	31.595	-21.066	68.200	15.539	PK
2	*	10494.500	48.302	31.453	-19.898	68.200	16.849	PK
3		11540.000	48.489	30.457	-25.511	74.000	18.032	PK
4		12288.000	47.770	29.959	-26.230	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz with OAW-AP1322	

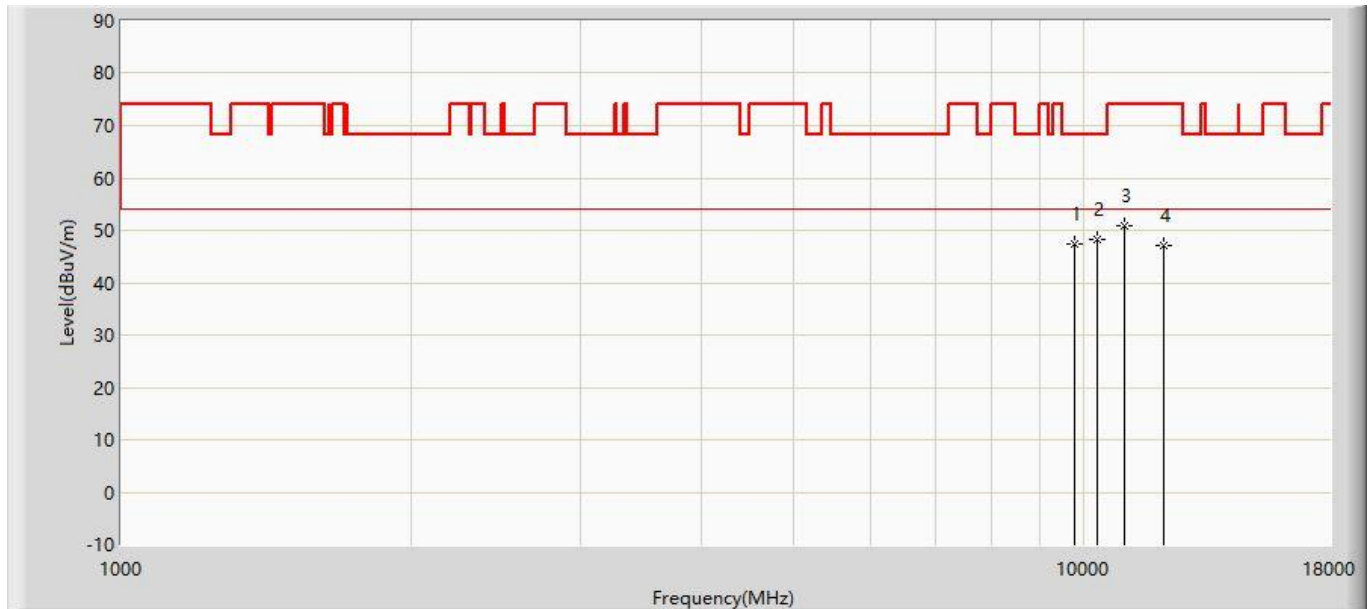


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9780.500	47.300	32.760	-20.900	68.200	14.540	PK
2		*	10333.000	48.144	31.811	-20.056	68.200	16.333	PK
3			10996.000	50.845	33.270	-23.155	74.000	17.575	PK
4			12109.500	47.006	29.190	-26.994	74.000	17.816	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz with OAW-AP1322	

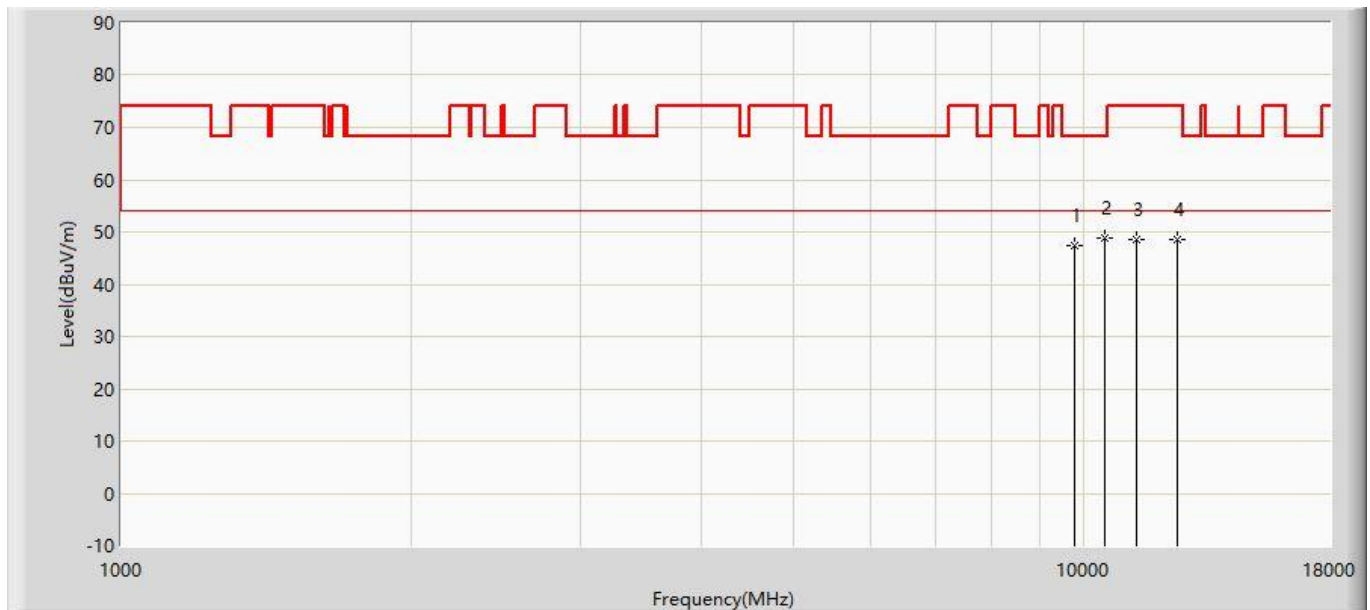


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9780.500	47.300	32.760	-20.900	68.200	14.540	PK
2		*	10503.000	48.824	31.951	-19.376	68.200	16.873	PK
3			11319.000	48.597	30.717	-25.403	74.000	17.880	PK
4			12517.500	48.544	30.694	-25.456	74.000	17.849	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5600MHz with OAW-AP1322	

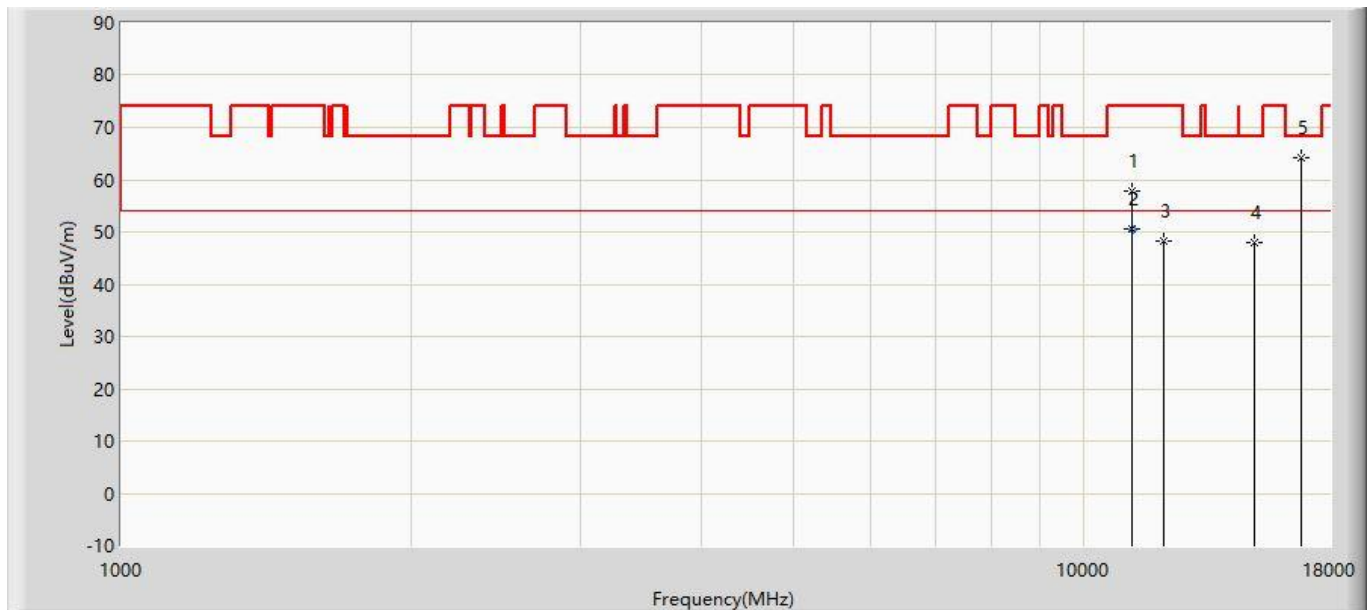


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11200.000	57.858	40.090	-16.142	74.000	17.768	PK
2		*	11200.000	50.559	32.791	-3.441	54.000	17.768	AV
3			12075.500	48.282	30.464	-25.718	74.000	17.818	PK
4			15025.000	48.024	27.226	-20.176	68.200	20.798	PK
5			16810.000	64.205	40.044	-3.995	68.200	24.161	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5600MHz with OAW-AP1322	

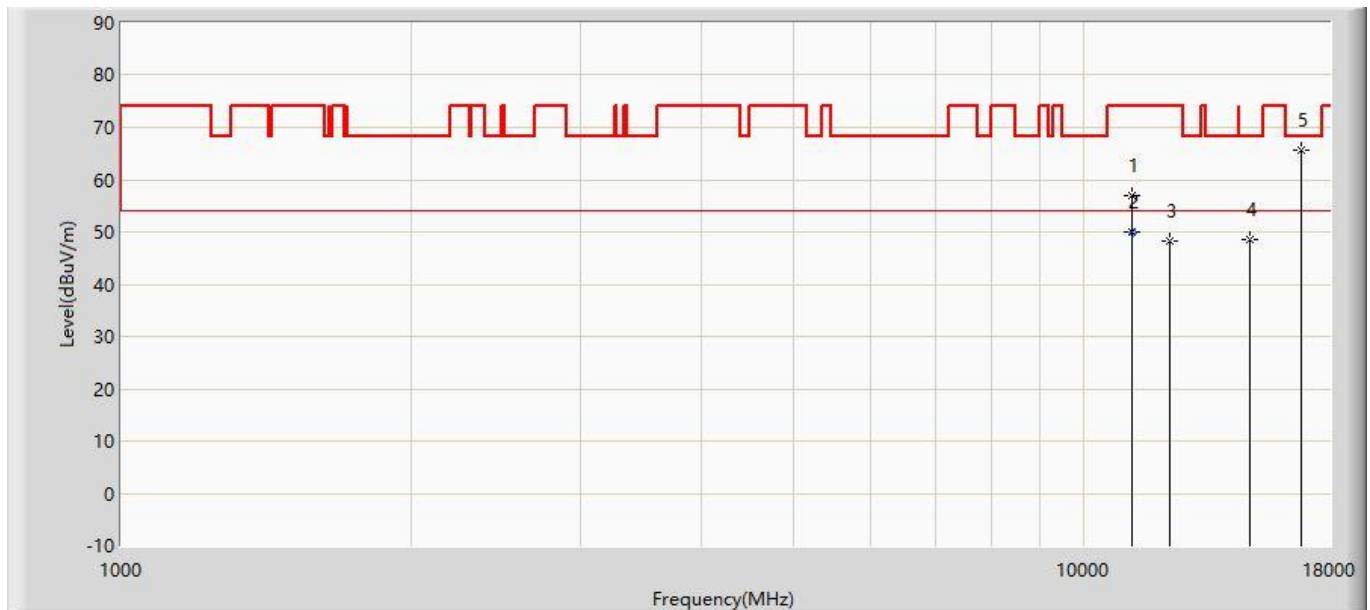


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11200.000	57.013	39.245	-16.987	74.000	17.768	PK
2			11200.000	50.109	32.341	-3.891	54.000	17.768	AV
3			12262.500	48.303	30.491	-25.697	74.000	17.811	PK
4			14855.000	48.468	27.717	-19.732	68.200	20.751	PK
5		*	16810.000	65.669	41.508	-2.531	68.200	24.161	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz with OAW-AP1322	

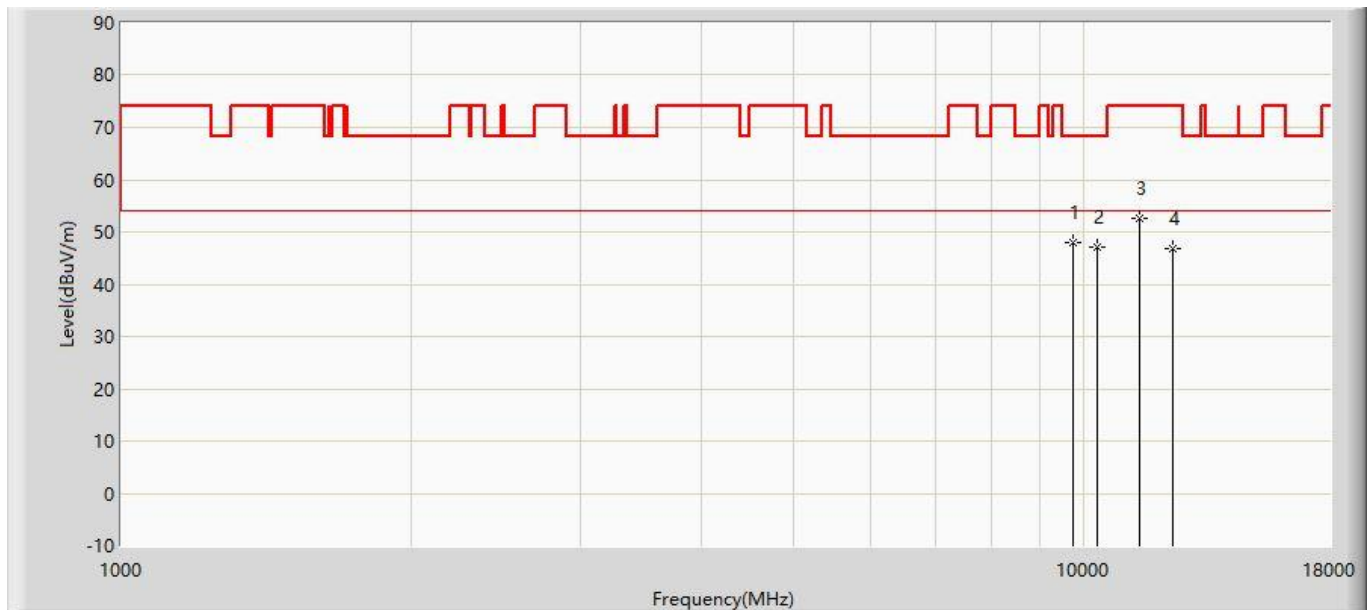


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9746.500	48.105	33.676	-20.095	68.200	14.428	PK
2			10316.000	47.089	30.811	-21.111	68.200	16.278	PK
3			11404.000	52.752	34.792	-21.248	74.000	17.960	PK
4			12381.500	46.877	29.068	-27.123	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz with OAW-AP1322	

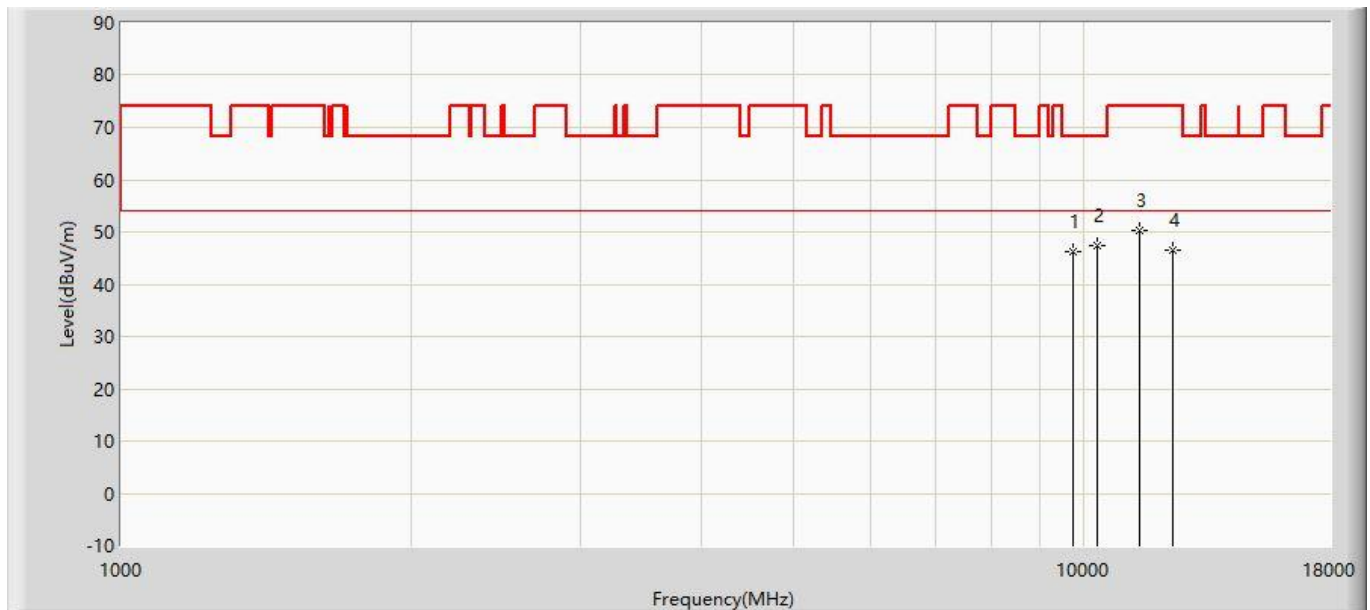


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9755.000	46.340	31.884	-21.860	68.200	14.456	PK
2		*	10307.500	47.281	31.030	-20.919	68.200	16.251	PK
3			11404.000	50.231	32.271	-23.769	74.000	17.960	PK
4			12381.500	46.447	28.638	-27.553	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5720MHz with OAW-AP1322	

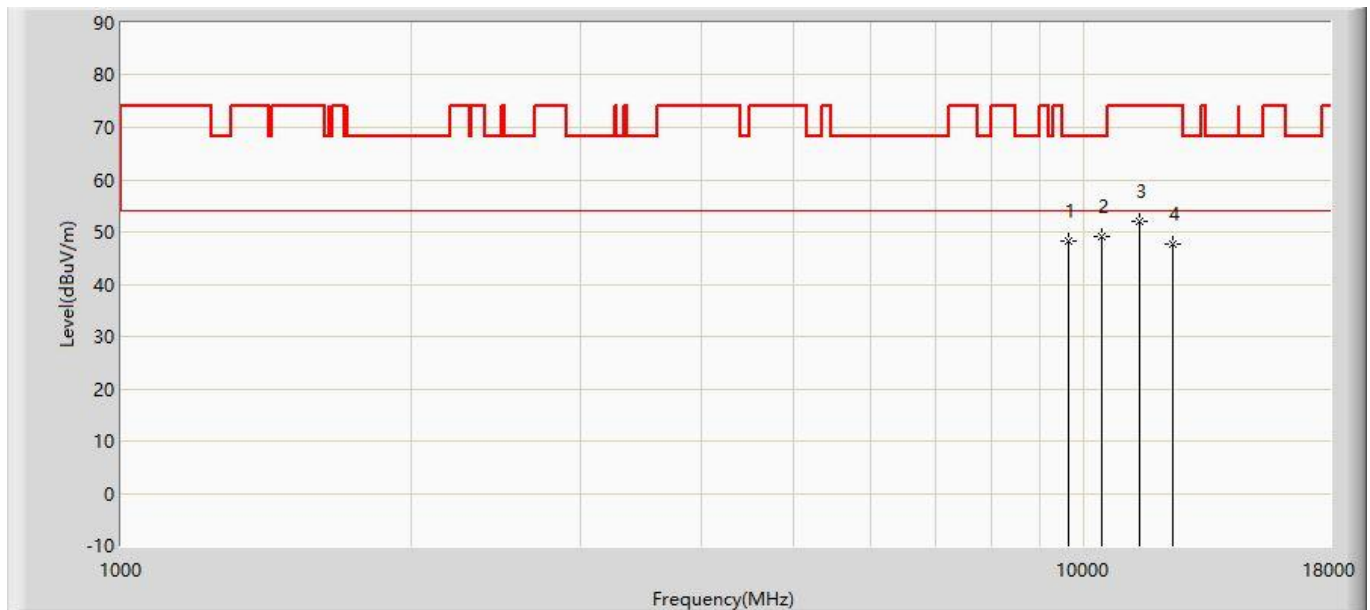


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.388	34.294	-19.812	68.200	14.094	PK
2		*	10418.000	49.033	32.427	-19.167	68.200	16.606	PK
3			11438.000	52.026	34.035	-21.974	74.000	17.991	PK
4			12381.500	47.623	29.814	-26.377	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5720MHz with OAW-AP1322	

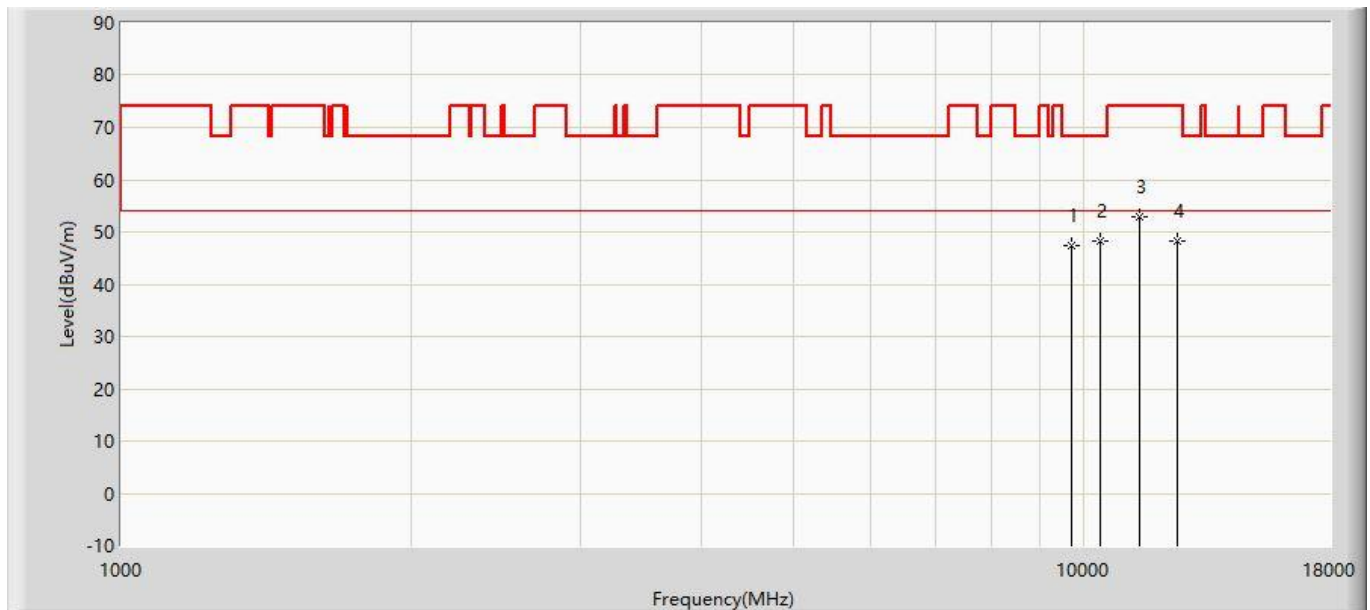


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	47.513	33.224	-20.687	68.200	14.289	PK
2		*	10401.000	48.403	31.852	-19.797	68.200	16.551	PK
3			11438.000	52.763	34.772	-21.237	74.000	17.991	PK
4			12517.500	48.361	30.511	-25.639	74.000	17.849	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz with OAW-AP1322	

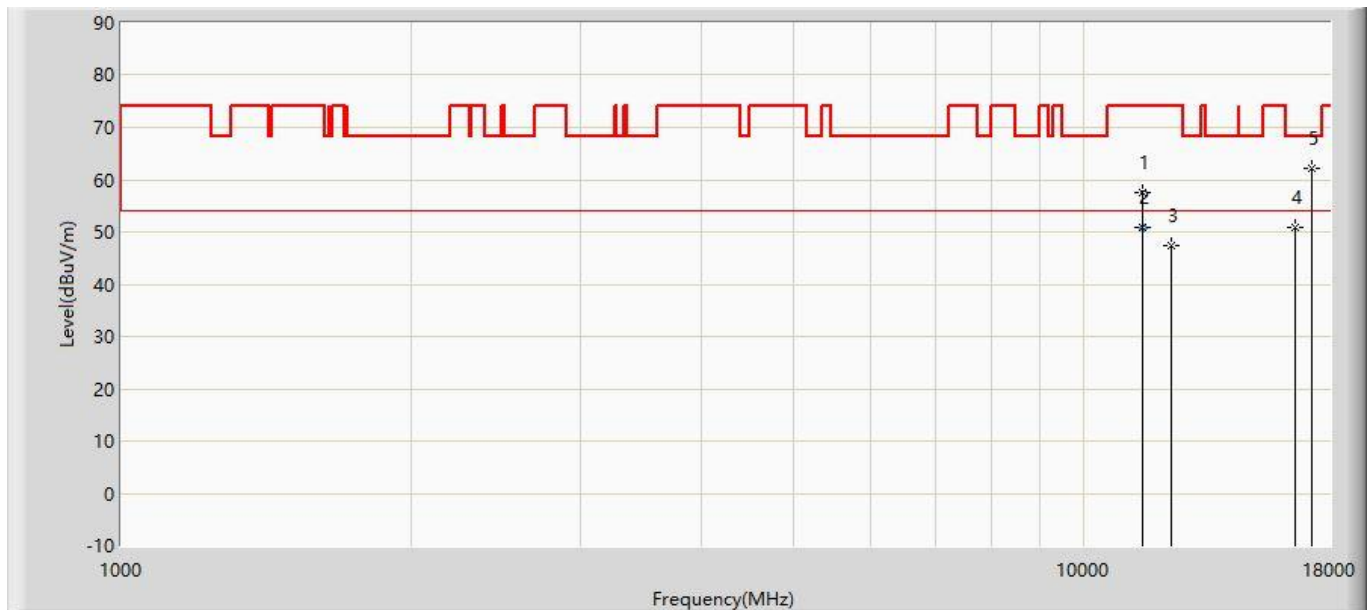


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11480.500	57.641	39.609	-16.359	74.000	18.031	PK
2		*	11481.500	50.927	32.894	-3.073	54.000	18.032	AV
3			12305.000	47.308	29.497	-26.692	74.000	17.811	PK
4			16555.000	50.729	28.379	-17.471	68.200	22.350	PK
5			17235.000	62.060	34.327	-6.140	68.200	27.733	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz with OAW-AP1322	

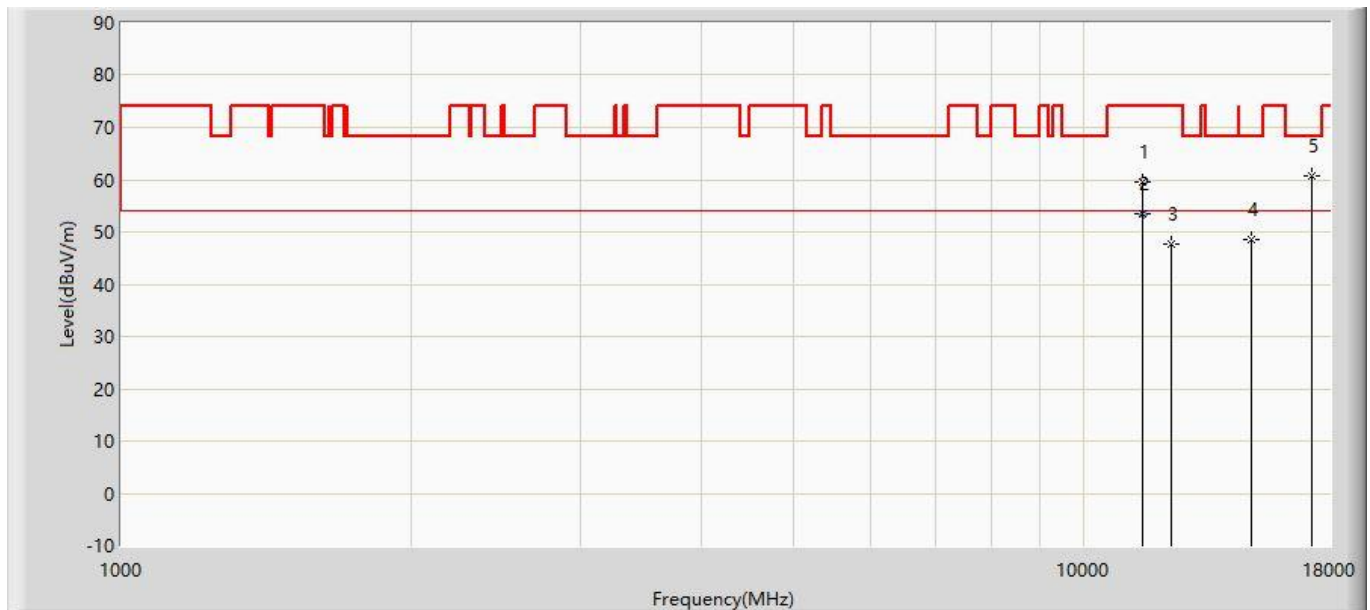


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	59.624	41.584	-14.376	74.000	18.040	PK
2		*	11490.010	53.377	35.337	-0.623	54.000	18.040	AV
3			12339.000	47.665	29.855	-26.335	74.000	17.810	PK
4			14914.500	48.607	27.840	-19.593	68.200	20.767	PK
5			17218.000	60.810	33.237	-7.390	68.200	27.573	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5785MHz with OAW-AP1322	

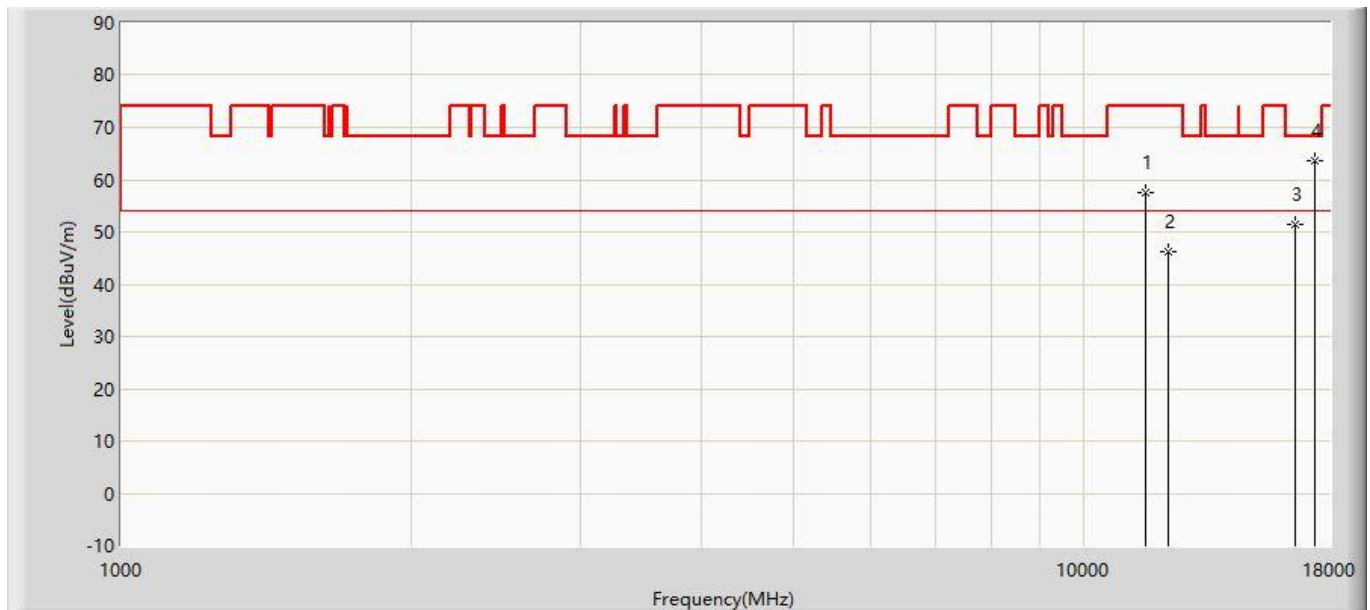


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11565.500	57.624	39.604	-16.376	74.000	18.020	PK
2			12220.000	46.252	28.438	-27.748	74.000	17.814	PK
3			16589.000	51.444	28.852	-16.756	68.200	22.592	PK
4		*	17354.000	63.716	34.858	-4.484	68.200	28.858	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5785MHz with OAW-AP1322	

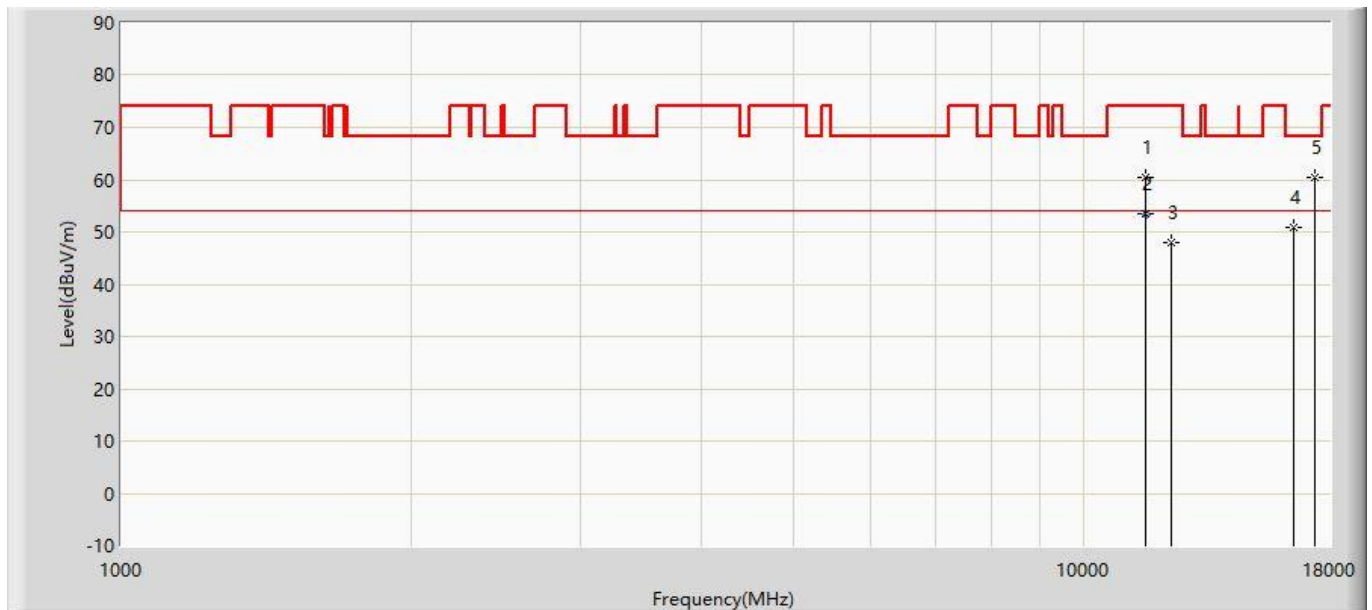


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11565.500	60.371	42.351	-13.629	74.000	18.020	PK
2		*	11565.650	53.465	35.445	-0.535	54.000	18.020	AV
3			12330.500	47.836	30.026	-26.164	74.000	17.810	PK
4			16495.500	50.814	28.859	-17.386	68.200	21.955	PK
5			17354.000	60.302	31.444	-7.898	68.200	28.858	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz with OAW-AP1322	

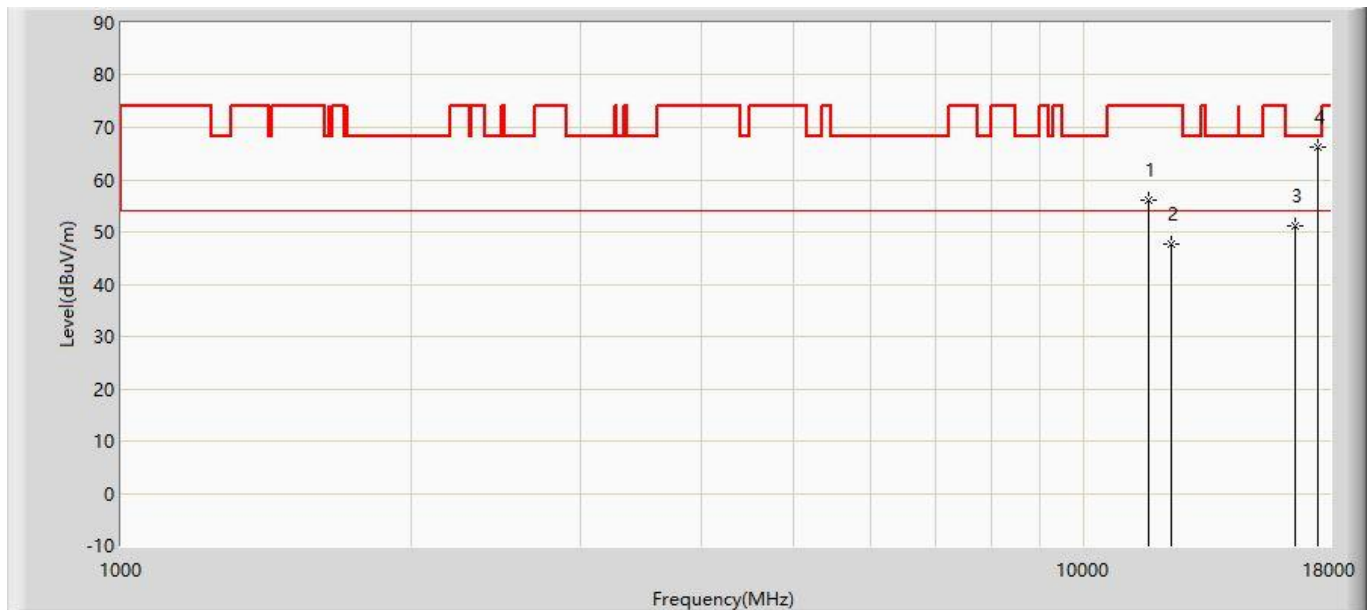


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11650.500	56.223	38.242	-17.777	74.000	17.981	PK
2			12339.000	47.550	29.740	-26.450	74.000	17.810	PK
3			16572.000	51.151	28.680	-17.049	68.200	22.471	PK
4		*	17473.000	66.295	36.310	-1.905	68.200	29.985	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz with OAW-AP1322	

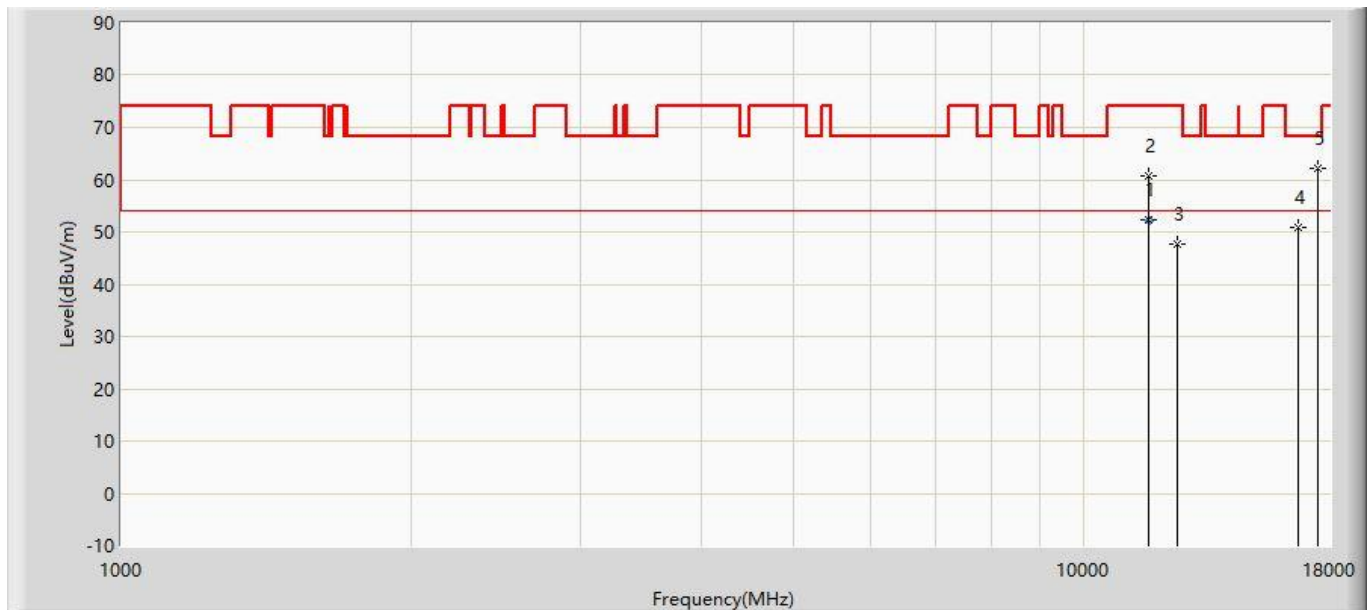


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	11650.270	52.322	34.341	-1.678	54.000	17.980	AV
2			11650.500	60.672	42.691	-13.328	74.000	17.981	PK
3			12517.500	47.653	29.803	-26.347	74.000	17.849	PK
4			16674.000	50.881	27.685	-17.319	68.200	23.196	PK
5			17473.000	62.087	32.102	-6.113	68.200	29.985	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz with OAW-AP1322	

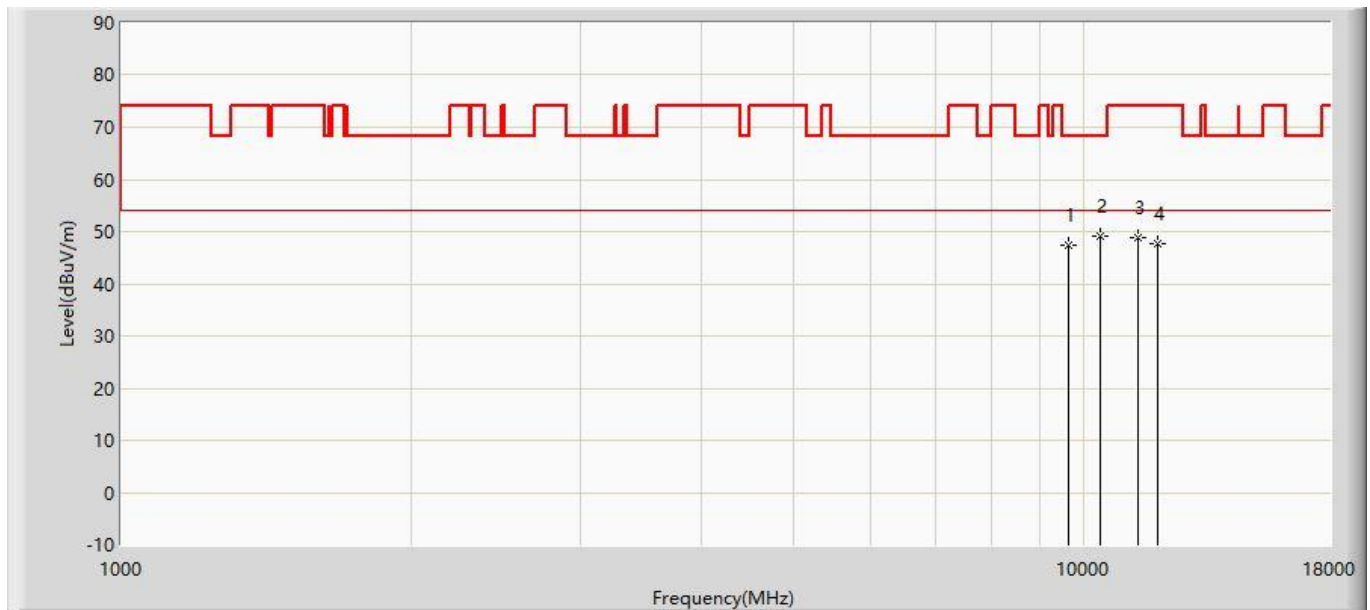


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9644.500	47.474	33.380	-20.726	68.200	14.094	PK
2	*	10384.000	49.004	32.508	-19.196	68.200	16.496	PK
3		11361.500	48.787	30.868	-25.213	74.000	17.919	PK
4		11922.500	47.794	29.938	-26.206	74.000	17.856	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz with OAW-AP1322	

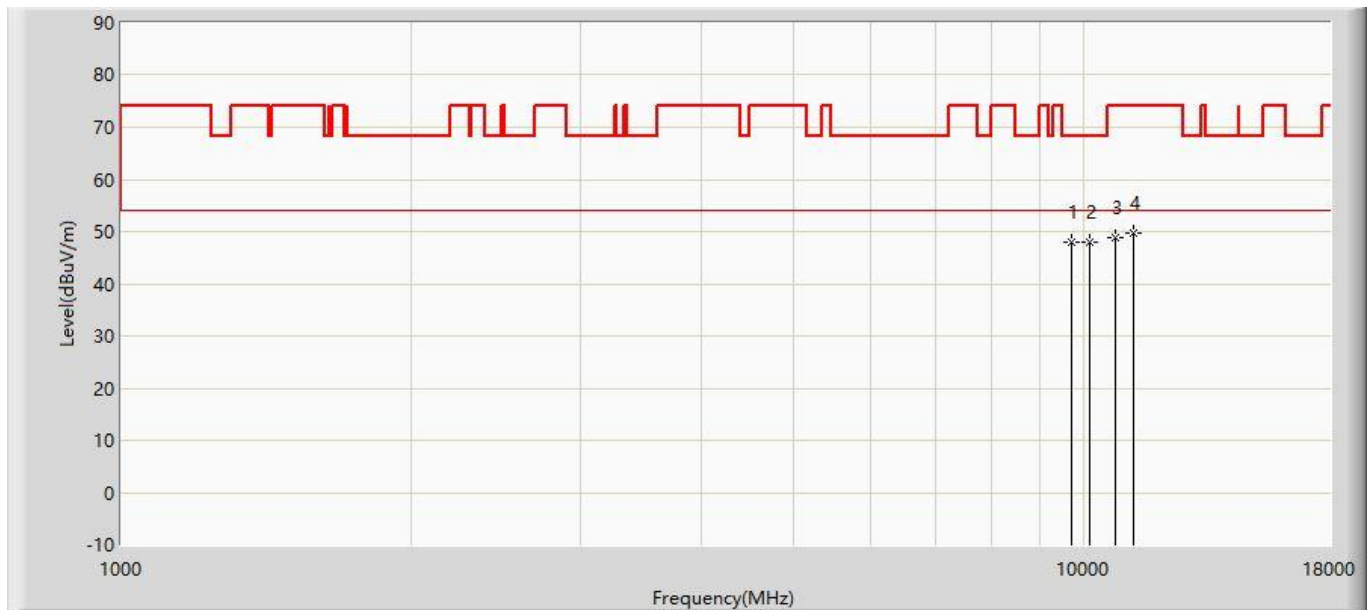


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9721.000	47.868	33.523	-20.332	68.200	14.345	PK
2	*	10146.000	47.931	32.201	-20.269	68.200	15.730	PK
3		10783.500	48.897	31.624	-25.103	74.000	17.273	PK
4		11268.000	49.728	31.896	-24.272	74.000	17.832	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5230MHz with OAW-AP1322	

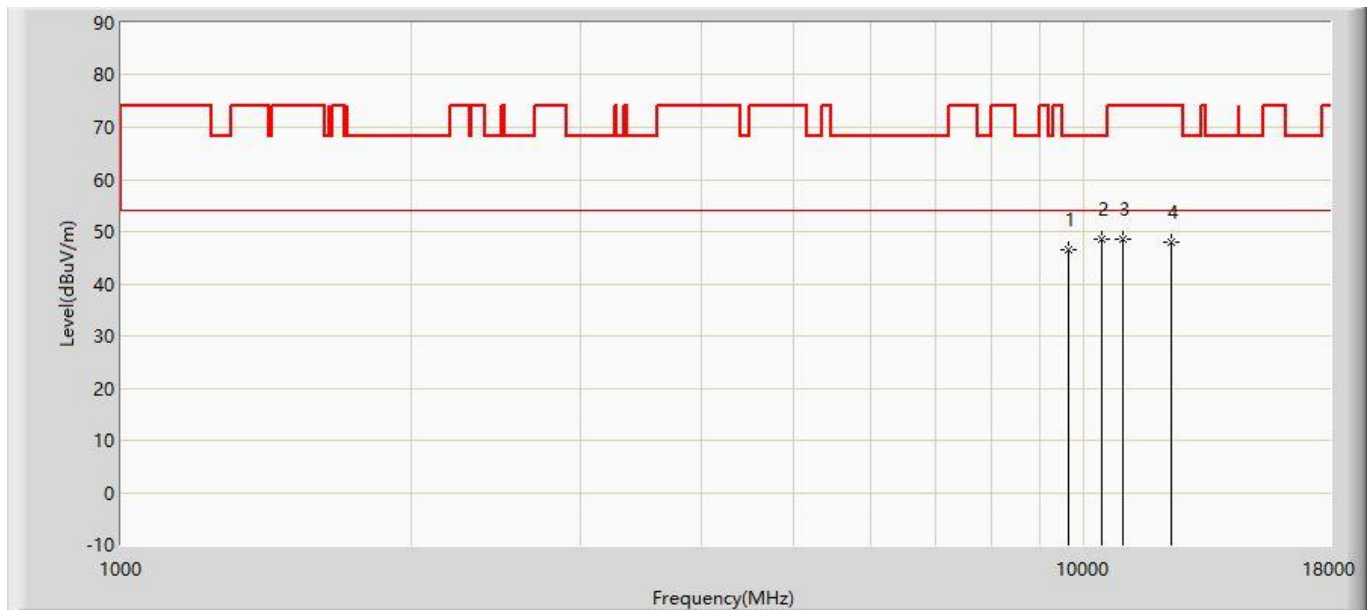


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9644.500	46.409	32.315	-21.791	68.200	14.094	PK
2	*	10443.500	48.540	31.852	-19.660	68.200	16.688	PK
3		10970.500	48.545	31.007	-25.455	74.000	17.538	PK
4		12305.000	47.936	30.125	-26.064	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5230MHz with OAW-AP1322	

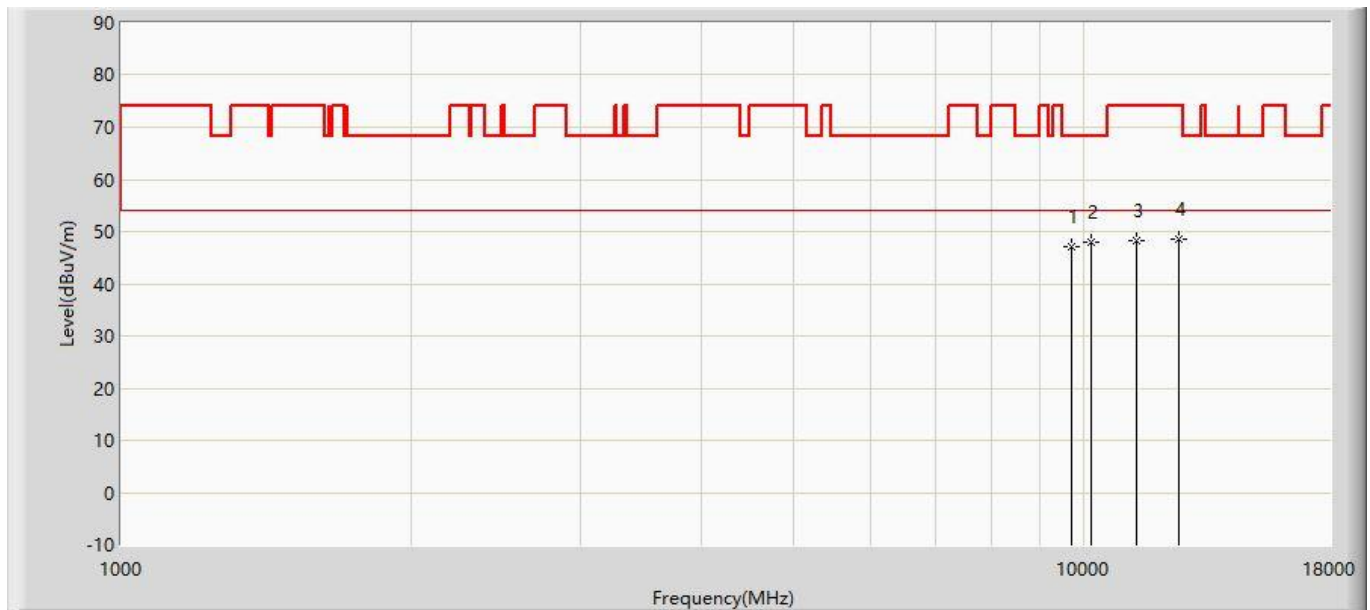


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9704.000	47.037	32.748	-21.163	68.200	14.289	PK
2	*	10180.000	48.045	32.205	-20.155	68.200	15.840	PK
3		11336.000	48.345	30.449	-25.655	74.000	17.896	PK
4		12560.000	48.662	30.703	-25.338	74.000	17.959	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5270MHz with OAW-AP1322	

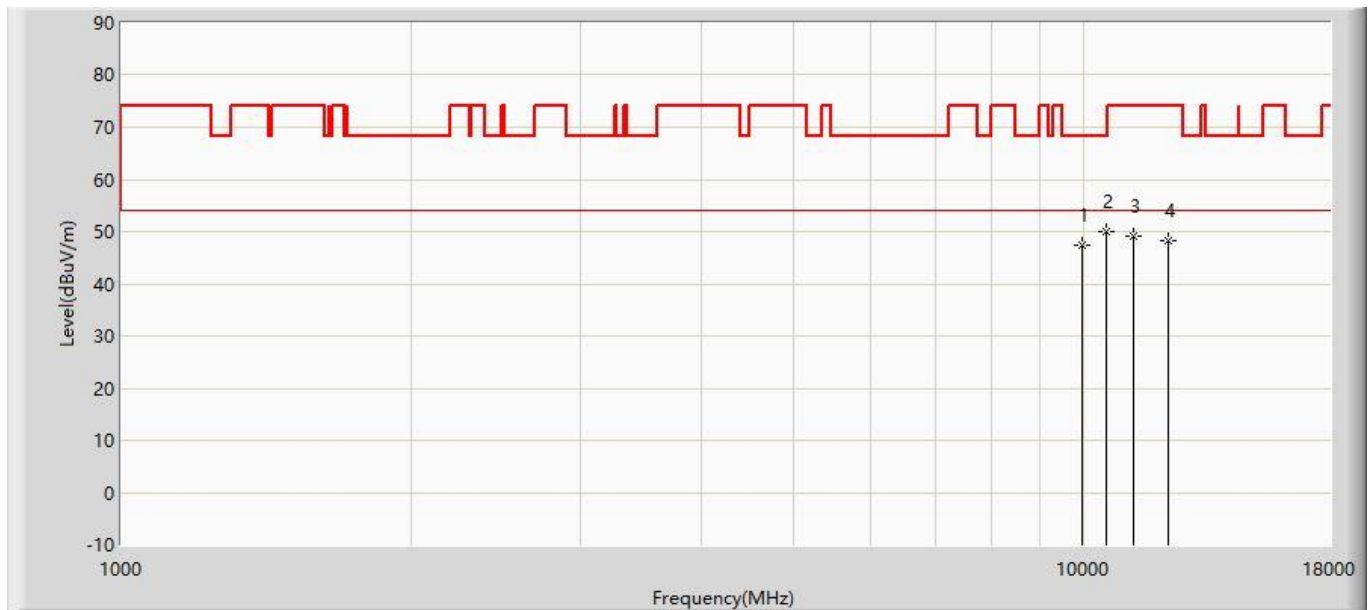


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9967.500	47.293	32.139	-20.907	68.200	15.154	PK
2	*	10537.000	49.886	32.963	-18.314	68.200	16.923	PK
3		11268.000	49.252	31.420	-24.748	74.000	17.832	PK
4		12237.000	48.199	30.386	-25.801	74.000	17.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5270MHz with OAW-AP1322	

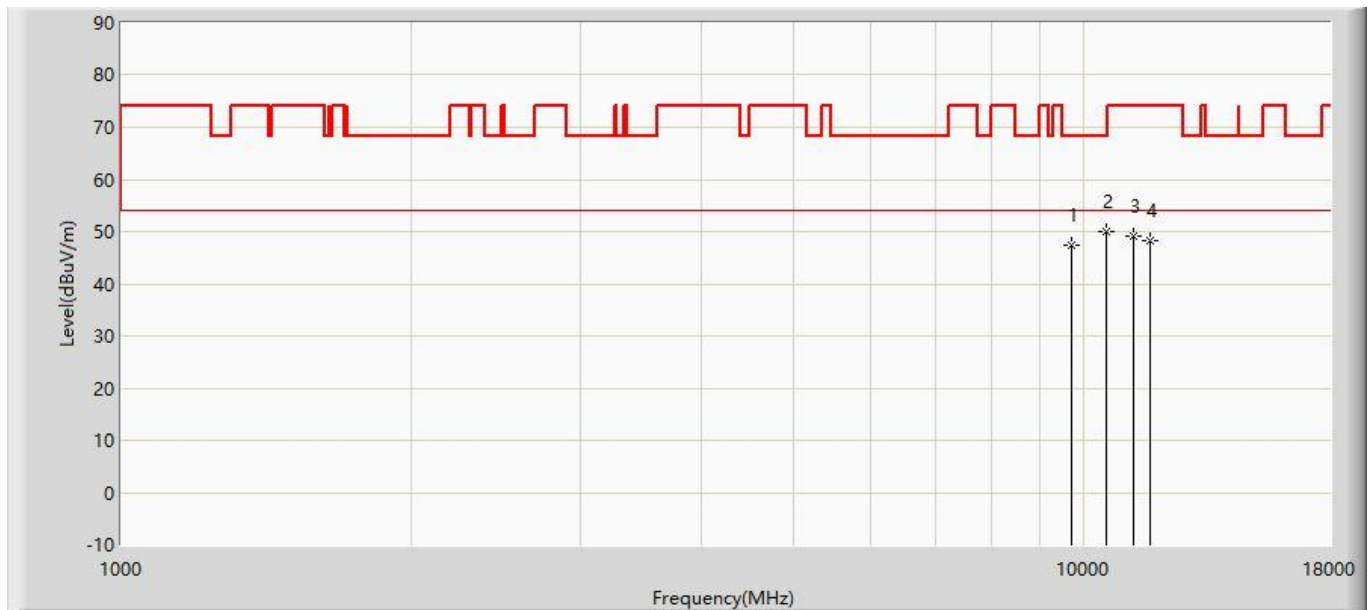


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9712.500	47.333	33.016	-20.867	68.200	14.316	PK
2	*	10537.000	49.886	32.963	-18.314	68.200	16.923	PK
3		11268.000	49.252	31.420	-24.748	74.000	17.832	PK
4		11710.000	48.403	30.449	-25.597	74.000	17.954	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz with OAW-AP1322	

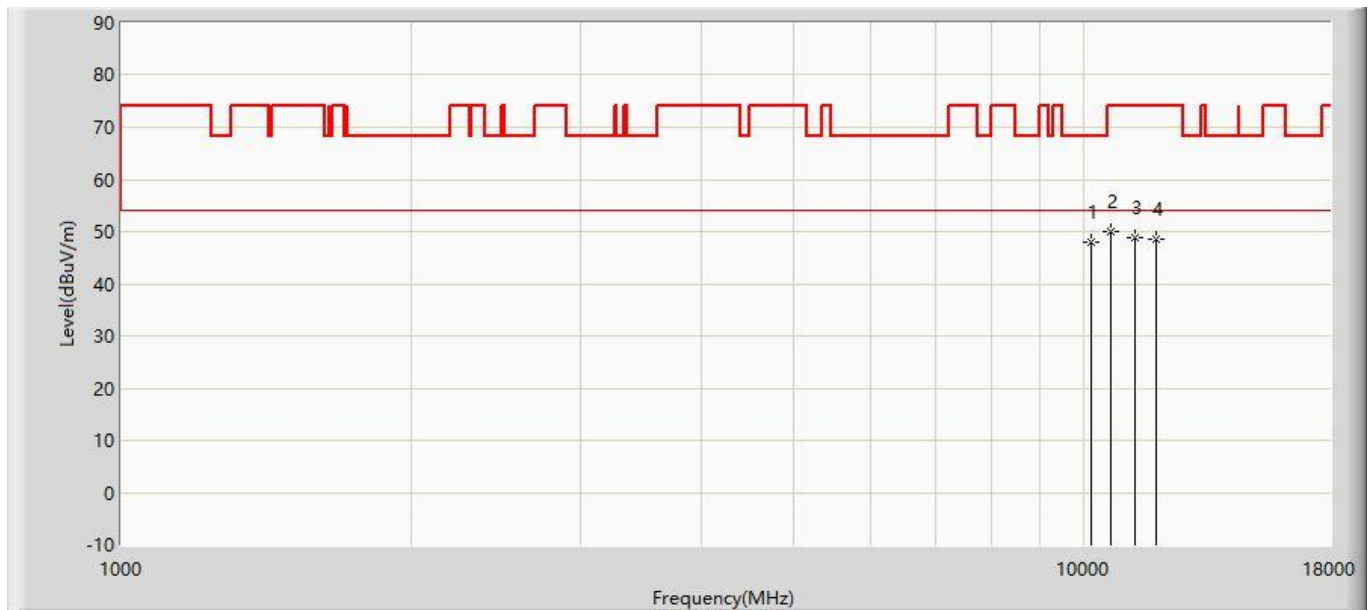


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	10171.500	48.006	32.194	-20.194	68.200	15.812	PK
2		10647.500	50.009	32.929	-23.991	74.000	17.080	PK
3		11276.500	48.741	30.901	-25.259	74.000	17.840	PK
4		11897.000	48.611	30.744	-25.389	74.000	17.867	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz with OAW-AP1322	

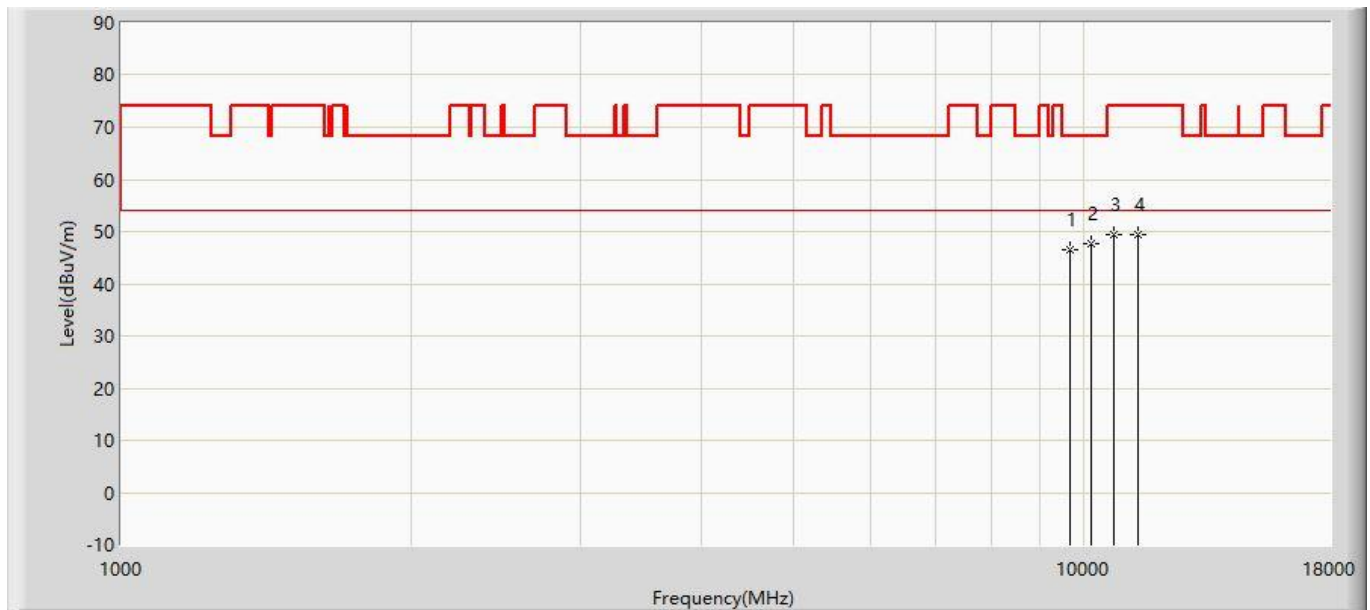


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9653.000	46.426	32.304	-21.774	68.200	14.122	PK
2	*	10180.000	47.776	31.936	-20.424	68.200	15.840	PK
3		10724.000	49.326	32.138	-24.674	74.000	17.188	PK
4		11361.500	49.313	31.394	-24.687	74.000	17.919	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz with OAW-AP1322	

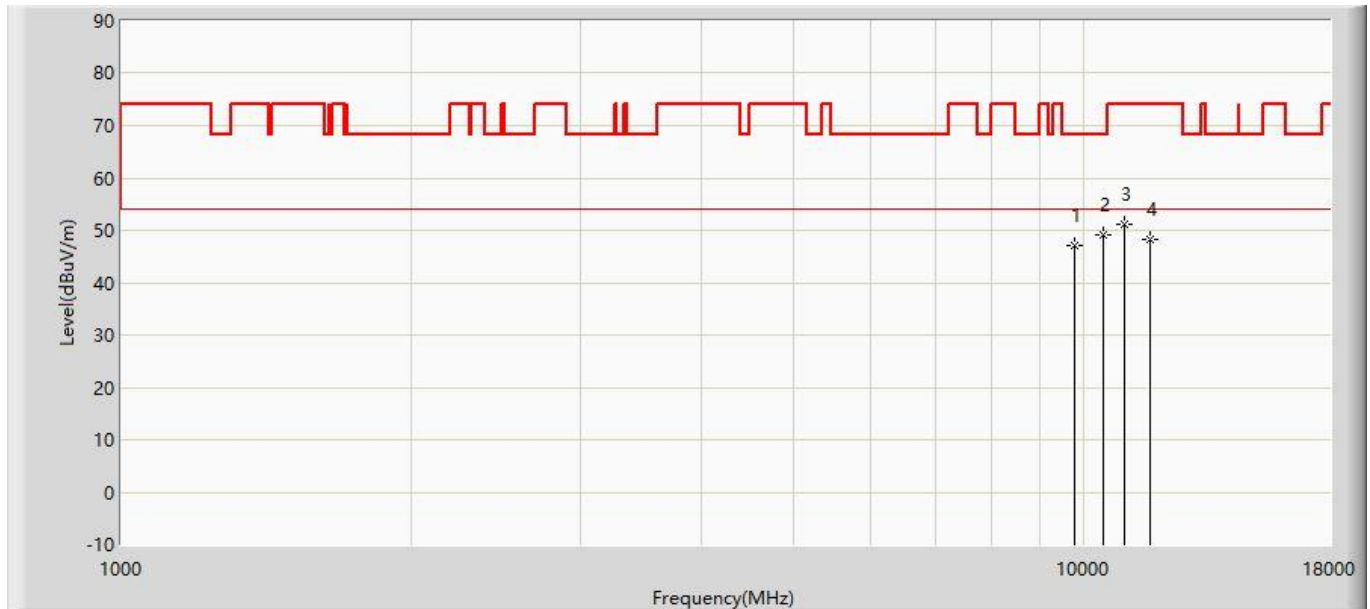


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	47.027	32.515	-21.173	68.200	14.512	PK
2		*	10486.000	49.025	32.200	-19.175	68.200	16.825	PK
3			11021.500	51.256	33.656	-22.744	74.000	17.600	PK
4			11718.500	48.271	30.321	-25.729	74.000	17.949	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz with OAW-AP1322	

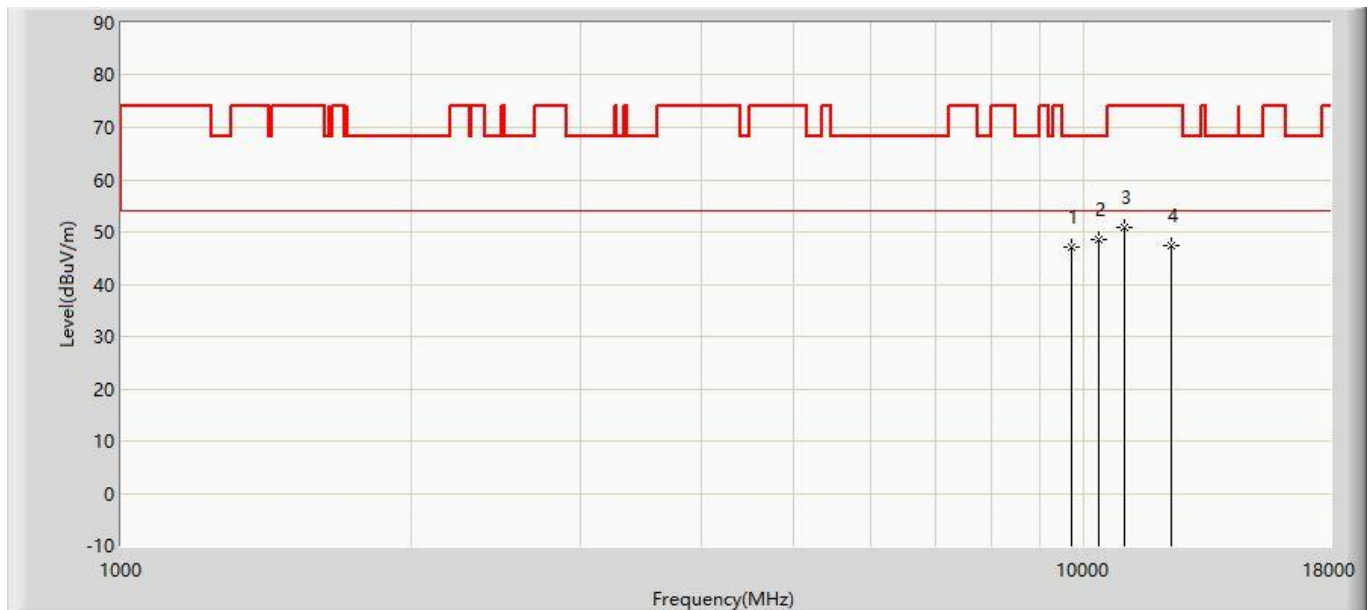


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	47.088	32.799	-21.112	68.200	14.289	PK
2		*	10367.000	48.531	32.090	-19.669	68.200	16.441	PK
3			11021.500	50.797	33.197	-23.203	74.000	17.600	PK
4			12305.000	47.327	29.516	-26.673	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5590MHz with OAW-AP1322	

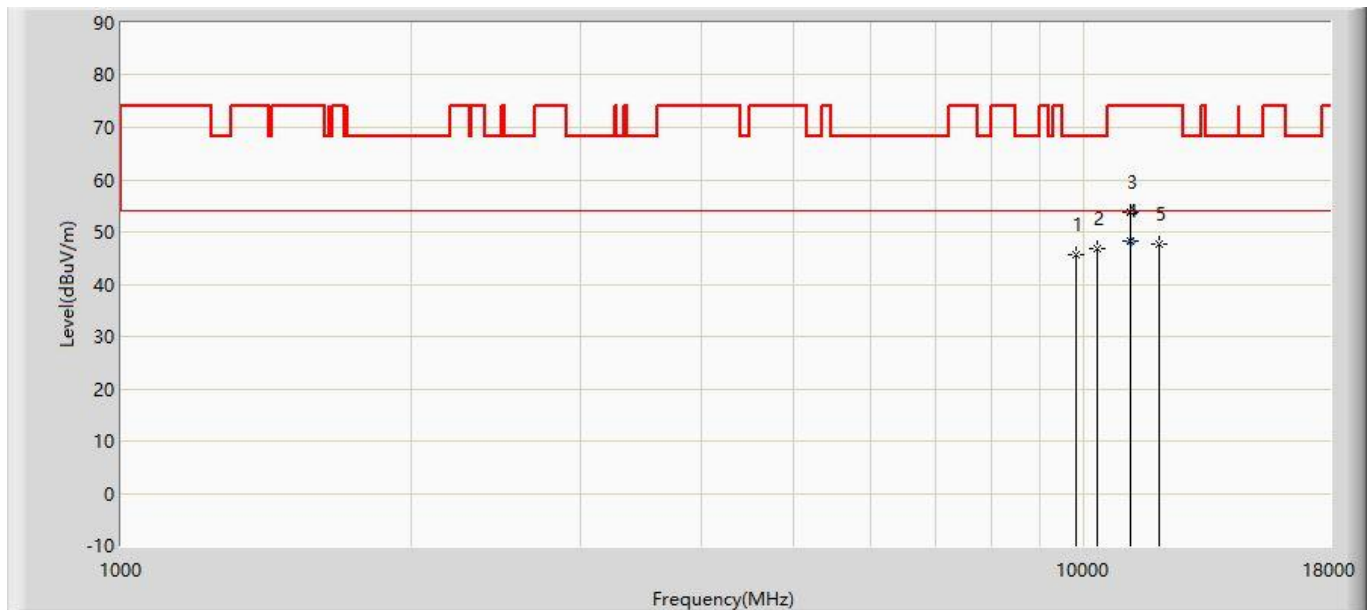


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	45.764	31.112	-22.436	68.200	14.652	PK
2			10324.500	46.746	30.441	-21.454	68.200	16.305	PK
3			11183.000	53.738	35.986	-20.262	74.000	17.752	PK
4		*	11183.000	48.311	30.559	-5.689	54.000	17.752	AV
5			11948.000	47.691	29.847	-26.309	74.000	17.844	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5590MHz with OAW-AP1322	

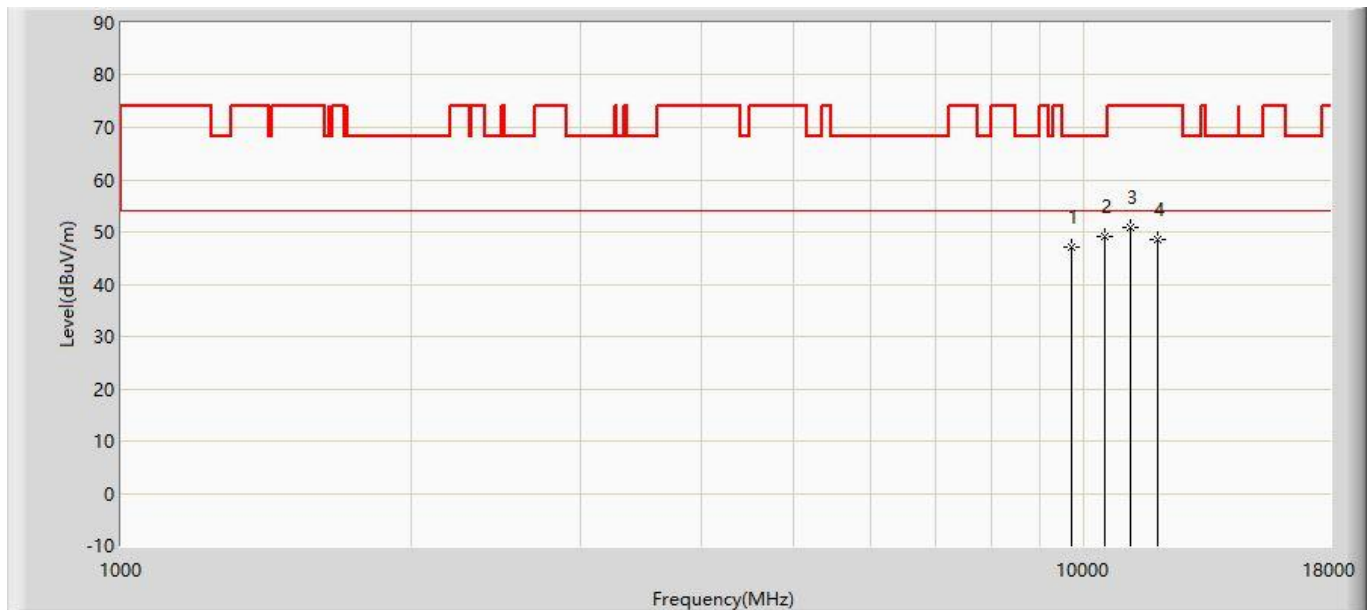


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	47.088	32.799	-21.112	68.200	14.289	PK
2		*	10494.500	48.987	32.138	-19.213	68.200	16.849	PK
3			11183.000	50.764	33.012	-23.236	74.000	17.752	PK
4			11914.000	48.617	30.757	-25.383	74.000	17.860	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz with OAW-AP1322	

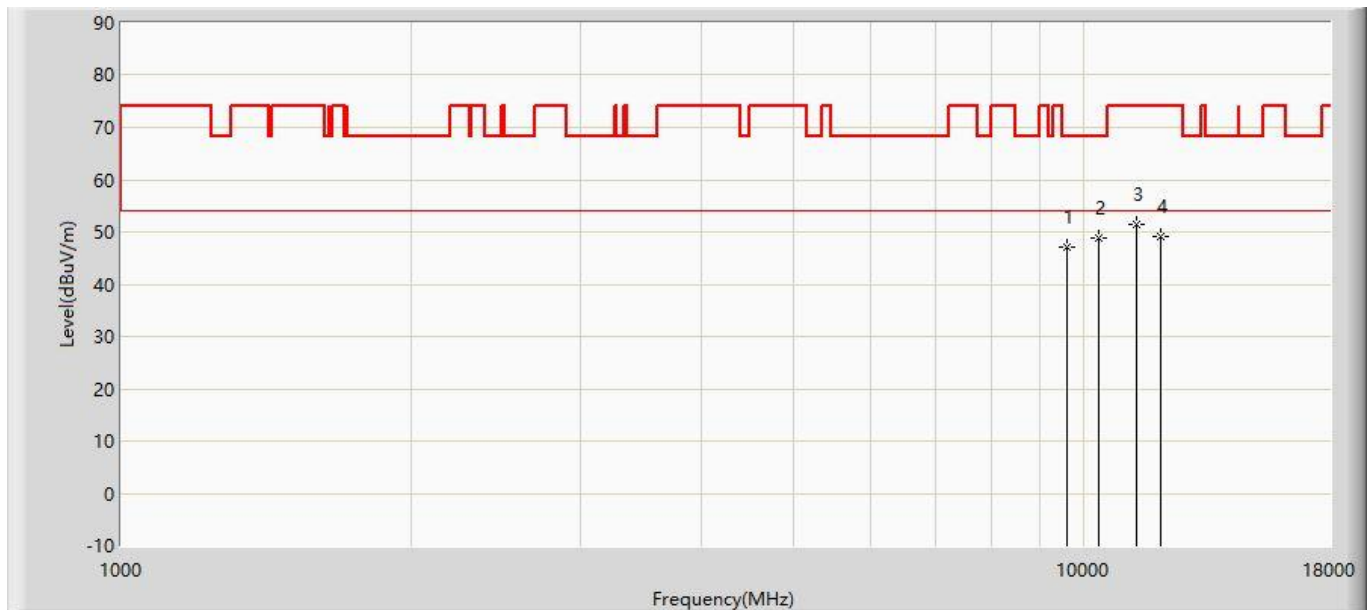


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9602.000	47.066	33.112	-21.134	68.200	13.954	PK
2		*	10341.500	48.814	32.454	-19.386	68.200	16.360	PK
3			11344.500	51.520	33.616	-22.480	74.000	17.903	PK
4			12016.000	49.046	31.227	-24.954	74.000	17.819	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz with OAW-AP1322	

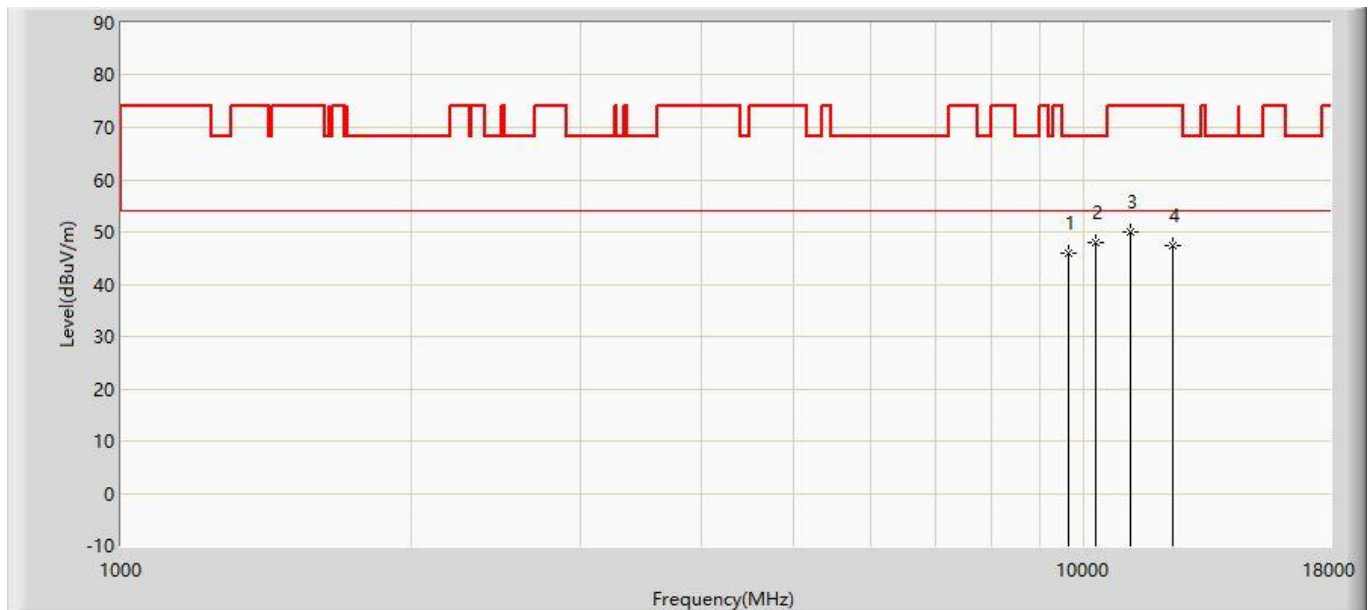


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9636.000	45.817	31.751	-22.383	68.200	14.066	PK
2		*	10299.000	47.936	31.713	-20.264	68.200	16.223	PK
3			11157.500	49.900	32.172	-24.100	74.000	17.728	PK
4			12373.000	47.306	29.497	-26.694	74.000	17.809	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5710MHz with OAW-AP1322	

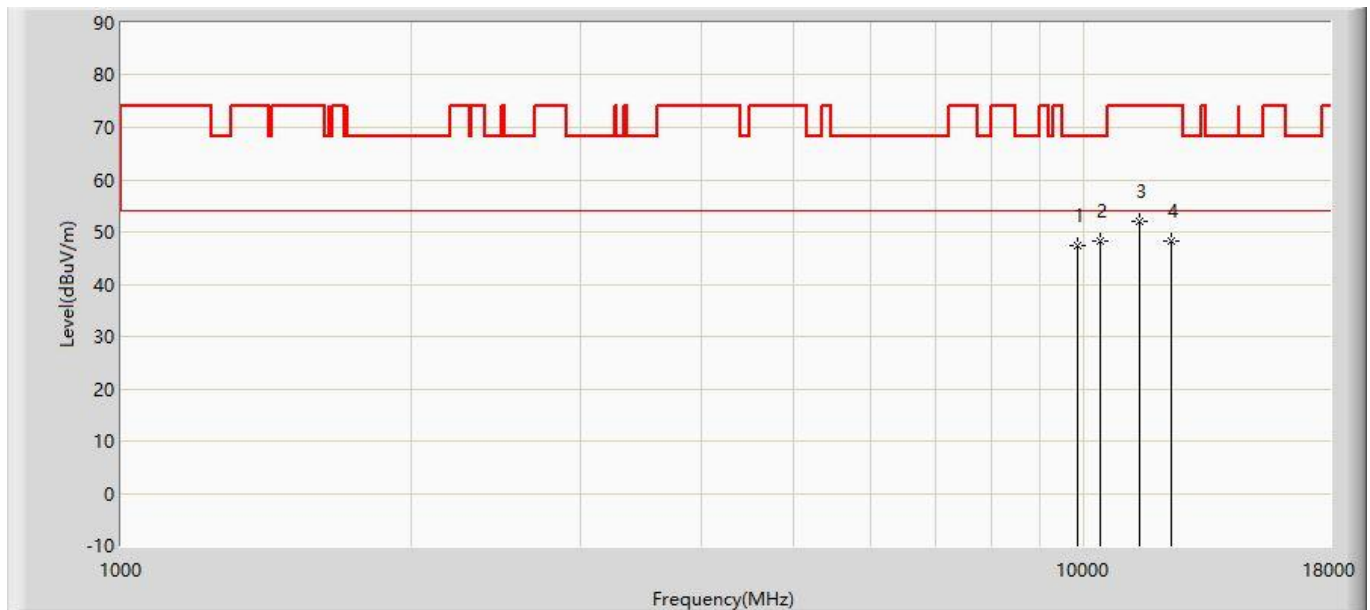


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9857.000	47.295	32.505	-20.905	68.200	14.790	PK
2		*	10409.500	48.329	31.750	-19.871	68.200	16.579	PK
3			11421.000	52.039	34.064	-21.961	74.000	17.975	PK
4			12322.000	48.242	30.431	-25.758	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5710MHz with OAW-AP1322	

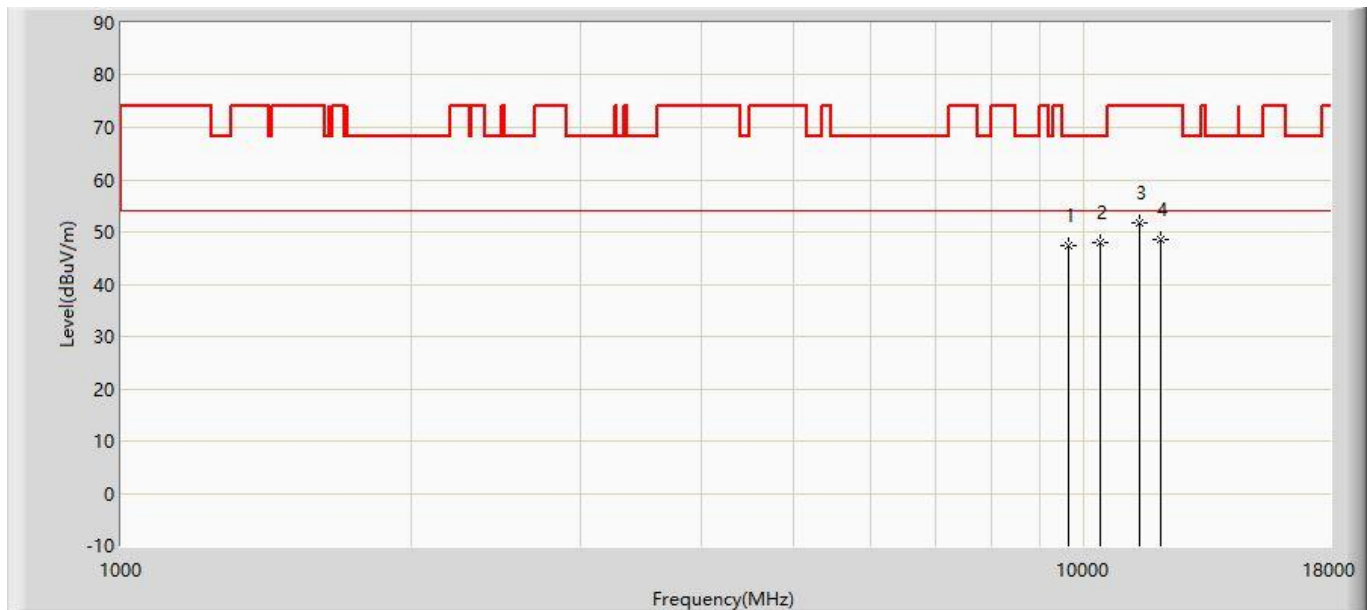


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9636.000	47.254	33.188	-20.946	68.200	14.066	PK
2		*	10401.000	48.003	31.452	-20.197	68.200	16.551	PK
3			11421.000	51.702	33.727	-22.298	74.000	17.975	PK
4			12016.000	48.633	30.814	-25.367	74.000	17.819	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz with OAW-AP1322	

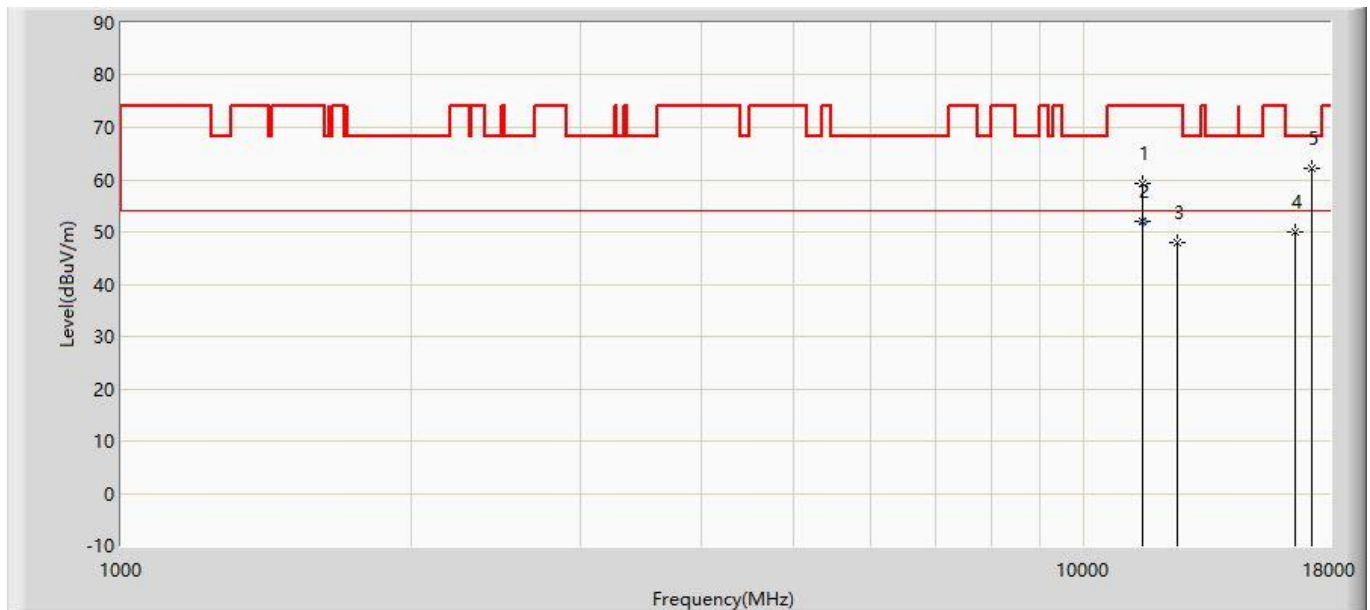


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11514.500	59.402	41.359	-14.598	74.000	18.044	PK
2		*	11514.600	52.036	33.993	-1.964	54.000	18.044	AV
3			12500.500	48.002	30.185	-25.998	74.000	17.816	PK
4			16555.000	50.009	27.659	-18.191	68.200	22.350	PK
5			17260.500	62.169	34.195	-6.031	68.200	27.974	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz with OAW-AP1322	

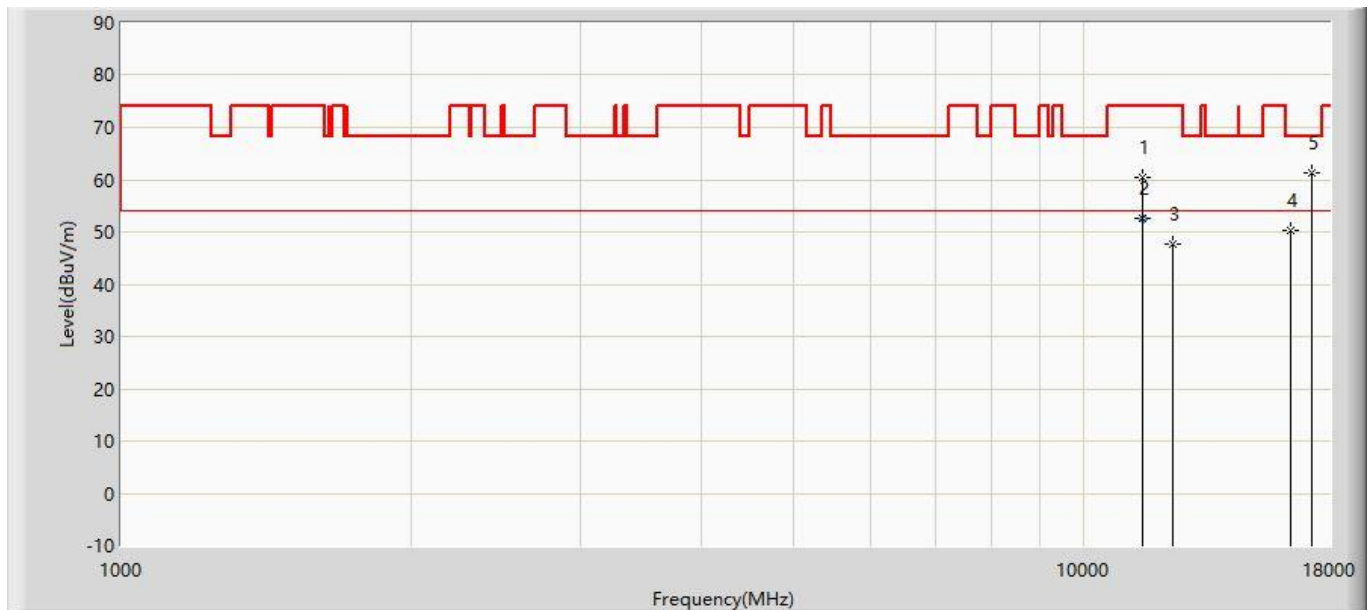


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11514.500	60.433	42.390	-13.567	74.000	18.044	PK
2		*	11514.500	52.736	34.693	-1.264	54.000	18.044	AV
3			12381.500	47.614	29.805	-26.386	74.000	17.808	PK
4			16402.000	50.319	28.644	-17.881	68.200	21.675	PK
5			17260.500	61.191	33.217	-7.009	68.200	27.974	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz with OAW-AP1322	

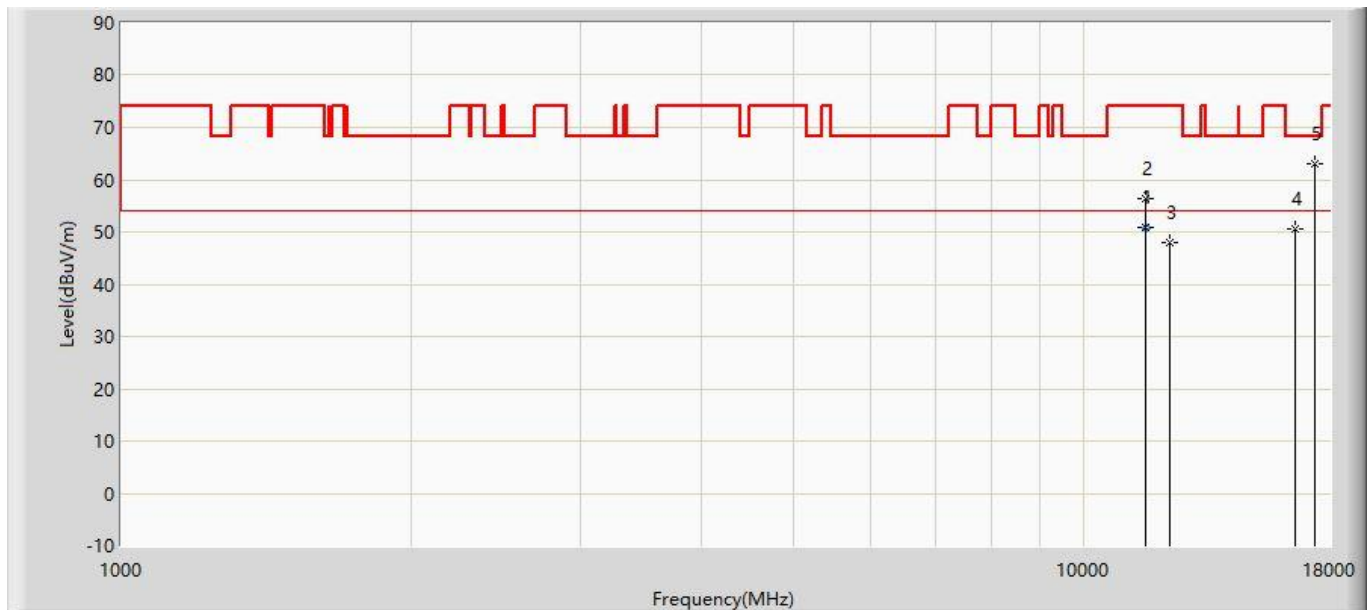


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	11590.560	50.808	32.799	-3.192	54.000	18.009	AV
2			11591.000	56.431	38.423	-17.569	74.000	18.008	PK
3			12288.000	47.839	30.028	-26.161	74.000	17.811	PK
4			16589.000	50.711	28.119	-17.489	68.200	22.592	PK
5			17379.500	63.141	34.040	-5.059	68.200	29.101	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz with OAW-AP1322	

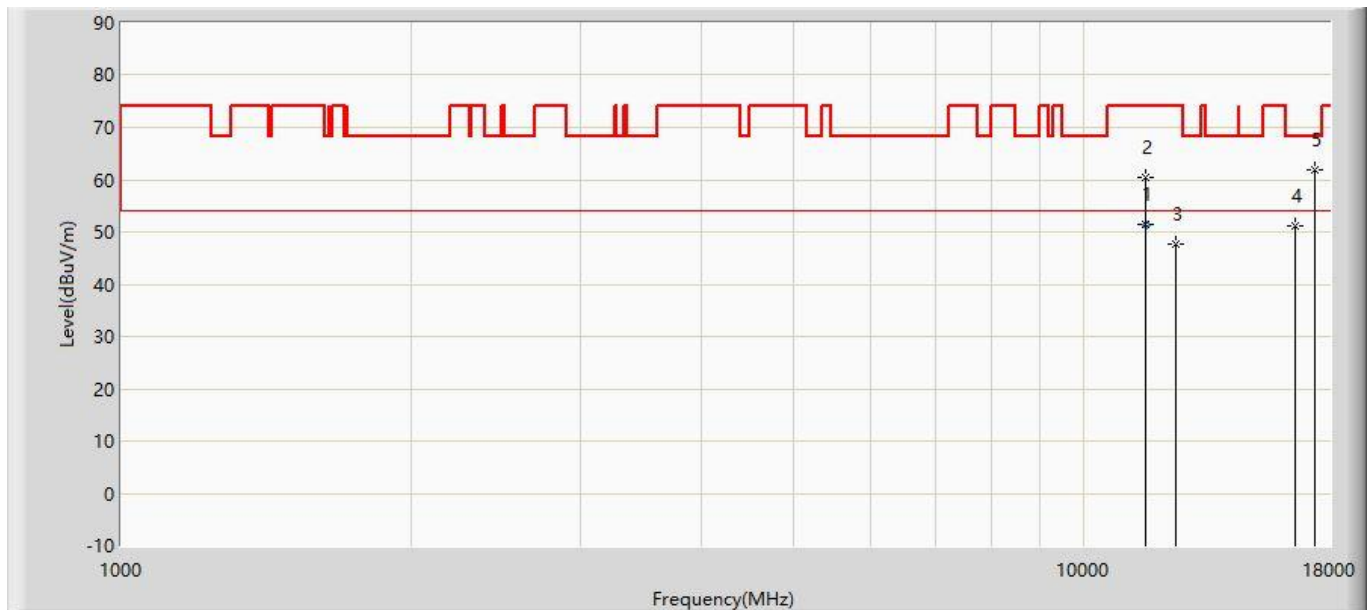


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	11590.270	51.384	33.375	-2.616	54.000	18.009	AV
2			11599.500	60.550	42.546	-13.450	74.000	18.004	PK
3			12458.000	47.617	29.811	-26.383	74.000	17.806	PK
4			16563.500	51.174	28.763	-17.026	68.200	22.411	PK
5			17388.000	62.015	32.834	-6.185	68.200	29.181	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz with OAW-AP1322	

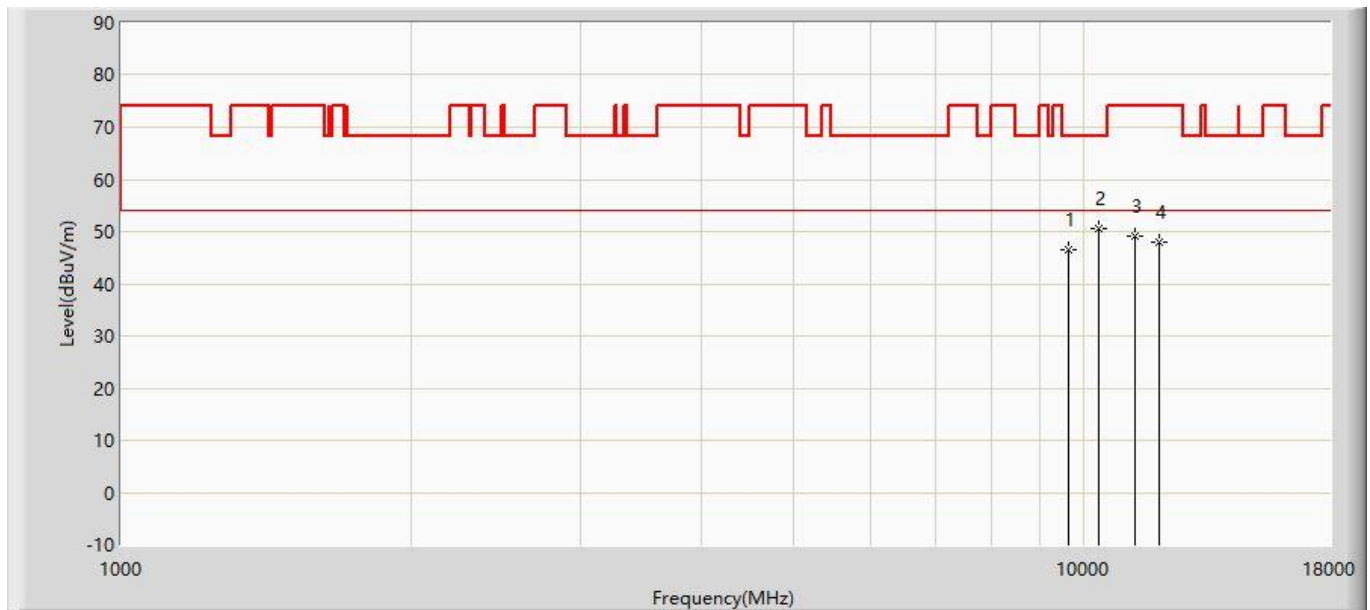


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9619.000	46.381	32.371	-21.819	68.200	14.010	PK
2	*	10358.500	50.436	34.022	-17.764	68.200	16.414	PK
3		11276.500	49.267	31.427	-24.733	74.000	17.840	PK
4		11965.000	47.971	30.135	-26.029	74.000	17.836	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz with OAW-AP1322	

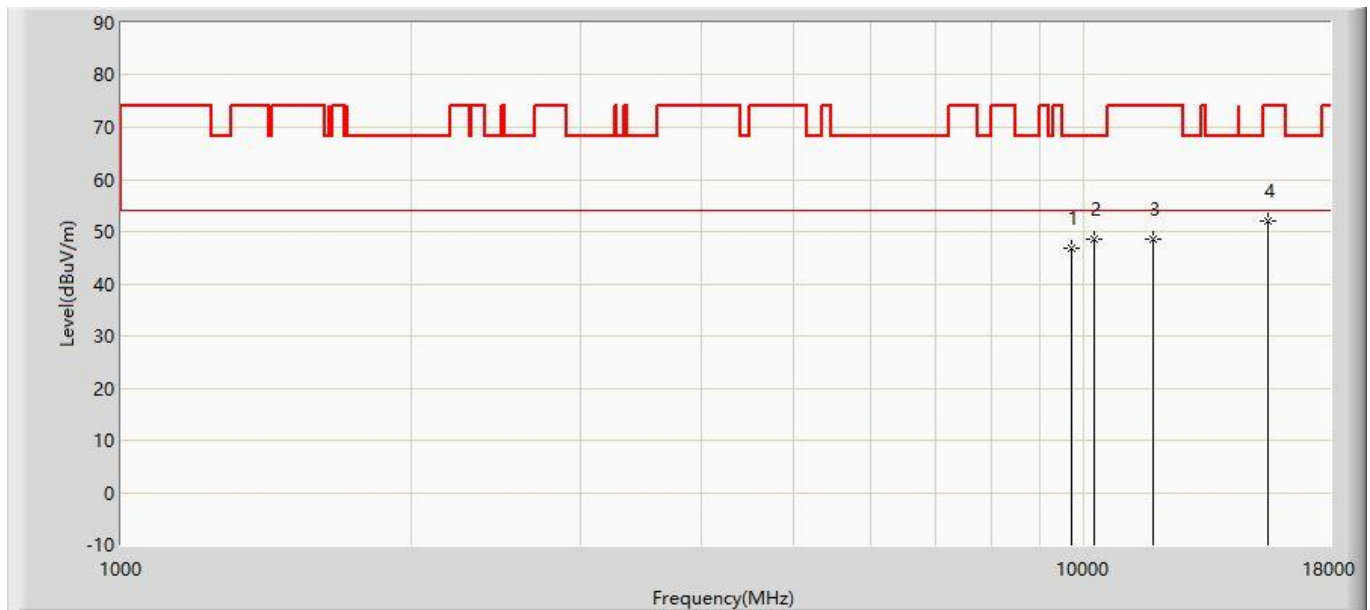


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9712.500	46.796	32.479	-21.404	68.200	14.316	PK
2	*	10248.000	48.572	32.513	-19.628	68.200	16.059	PK
3		11786.500	48.423	30.504	-25.577	74.000	17.918	PK
4		15543.500	52.135	31.224	-21.865	74.000	20.912	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5220MHz with OAW-AP1322	

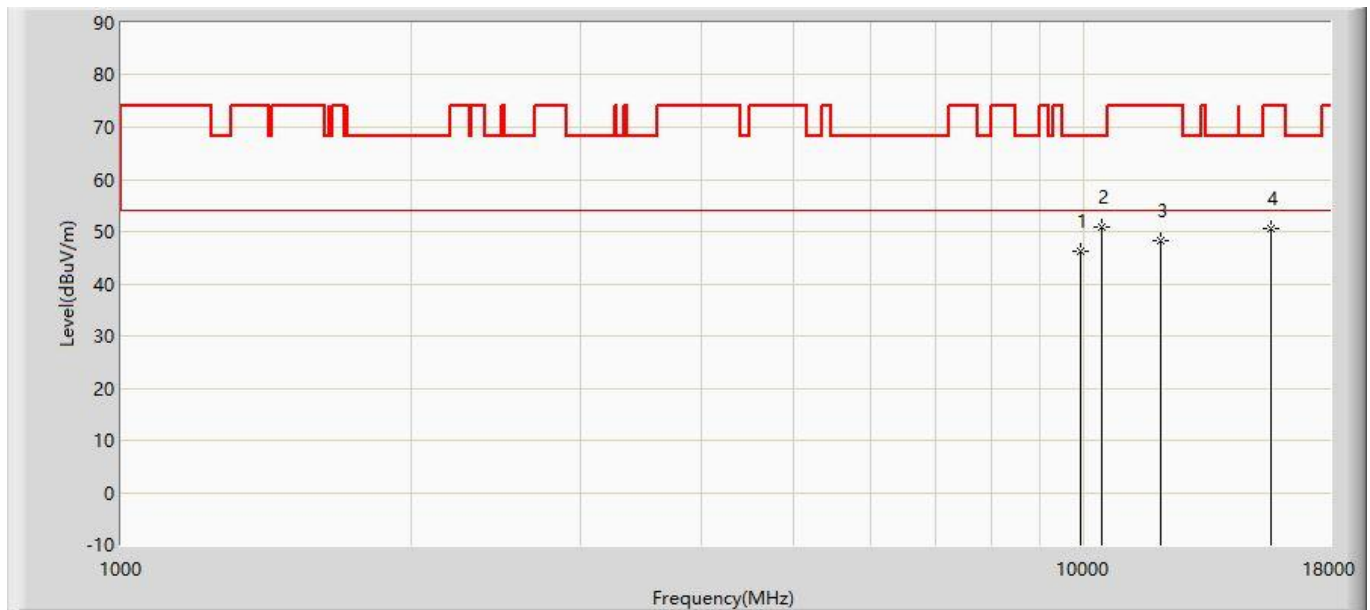


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9899.500	46.180	31.249	-22.020	68.200	14.931	PK
2	*	10443.500	50.994	34.306	-17.206	68.200	16.688	PK
3		11990.500	48.142	30.317	-25.858	74.000	17.825	PK
4		15654.000	50.540	29.725	-23.460	74.000	20.815	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5220MHz with OAW-AP1322	

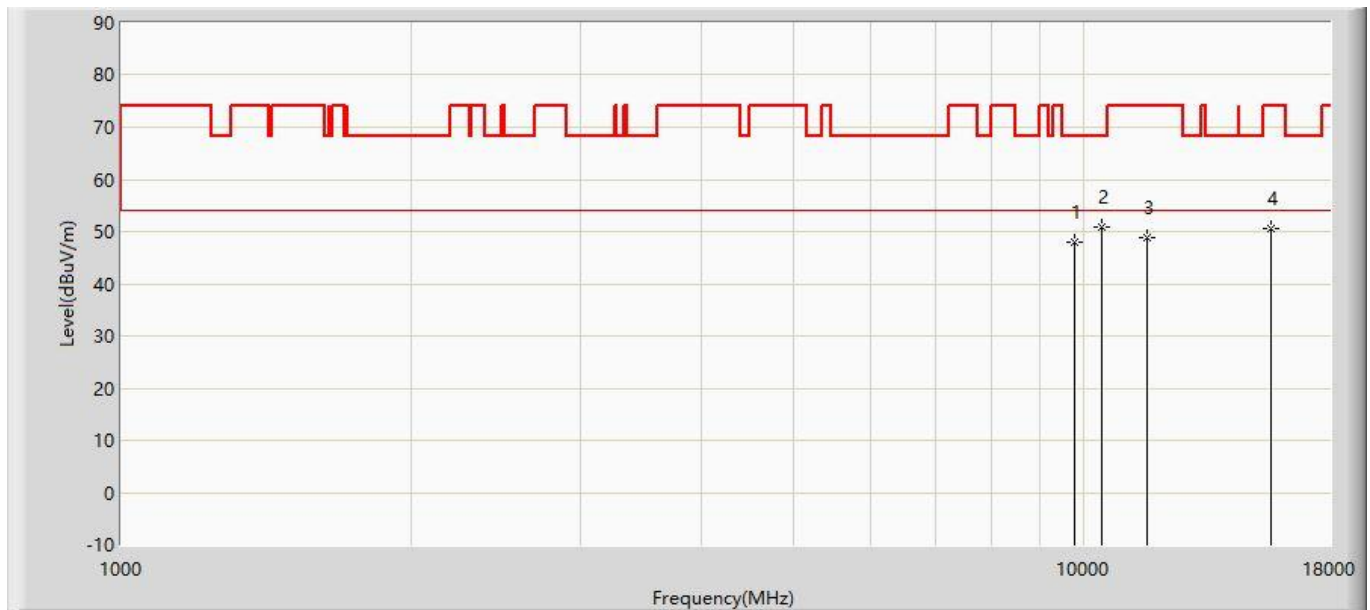


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9763.500	47.915	33.431	-20.285	68.200	14.485	PK
2	*	10443.500	50.994	34.306	-17.206	68.200	16.688	PK
3		11633.500	48.964	30.975	-25.036	74.000	17.989	PK
4		15654.000	50.540	29.725	-23.460	74.000	20.815	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5240MHz with OAW-AP1322	

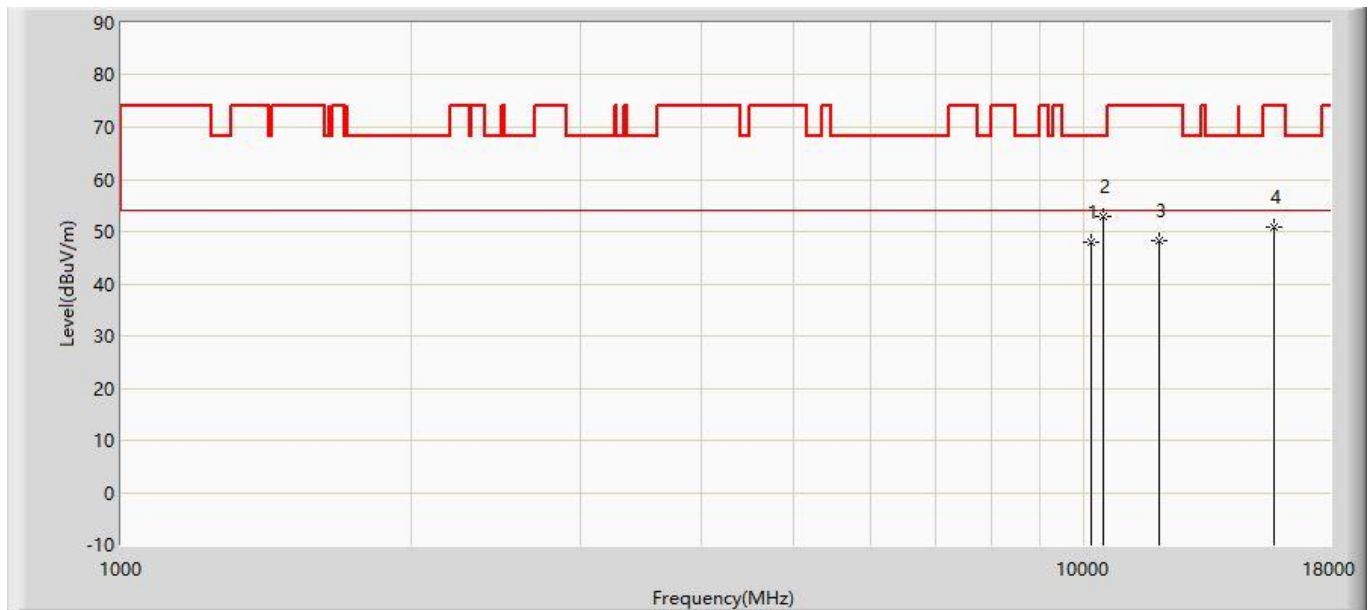


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10171.500	47.873	32.061	-20.327	68.200	15.812	PK
2	*	10477.500	53.004	36.207	-15.196	68.200	16.797	PK
3		11948.000	48.388	30.544	-25.612	74.000	17.844	PK
4		15722.000	50.790	30.036	-23.210	74.000	20.754	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5240MHz with OAW-AP1322	

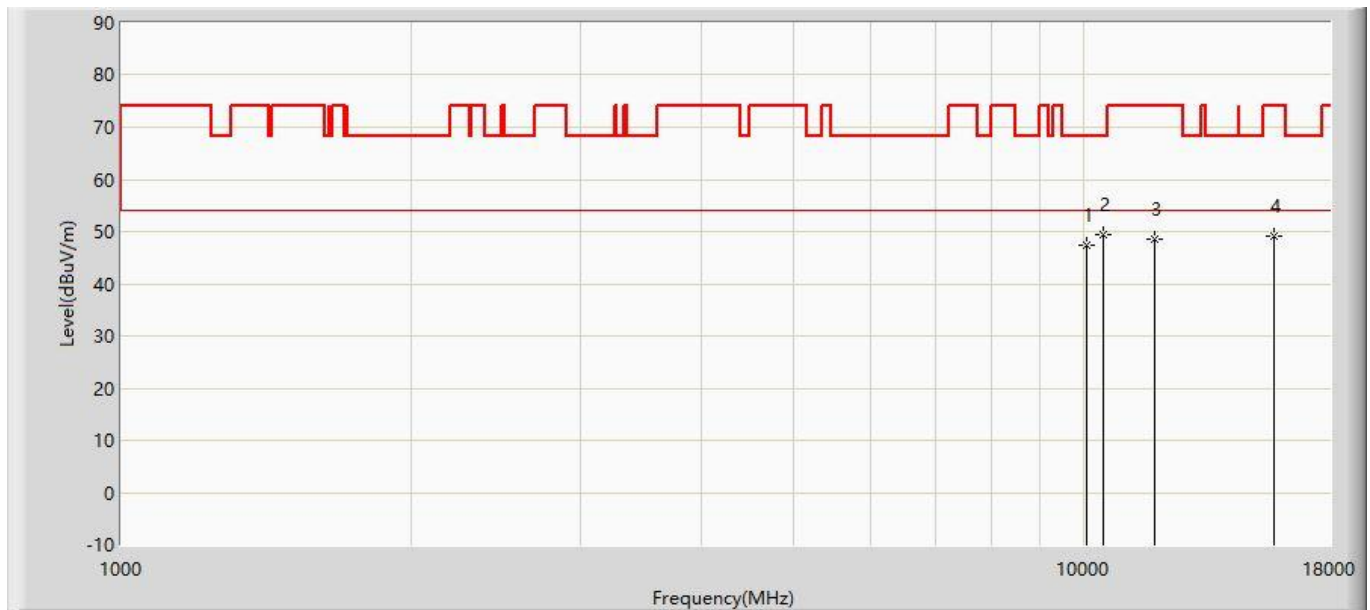


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10044.000	47.373	31.972	-20.827	68.200	15.401	PK
2	*	10477.500	49.519	32.722	-18.681	68.200	16.797	PK
3		11820.500	48.494	30.592	-25.506	74.000	17.903	PK
4		15722.000	49.235	28.481	-24.765	74.000	20.754	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5260MHz with OAW-AP1322	

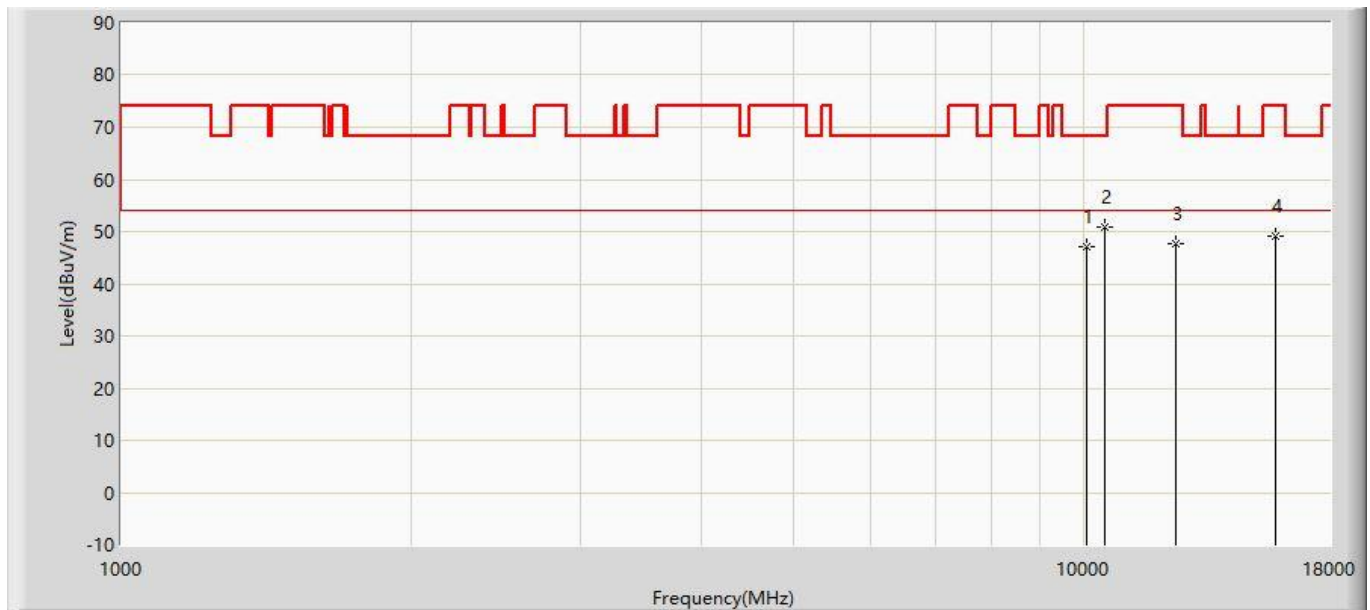


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10052.500	47.009	31.580	-21.191	68.200	15.428	PK
2	*	10520.000	50.971	34.073	-17.229	68.200	16.898	PK
3		12458.000	47.808	30.002	-26.192	74.000	17.806	PK
4		15781.500	49.142	28.440	-24.858	74.000	20.702	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5260MHz with OAW-AP1322	

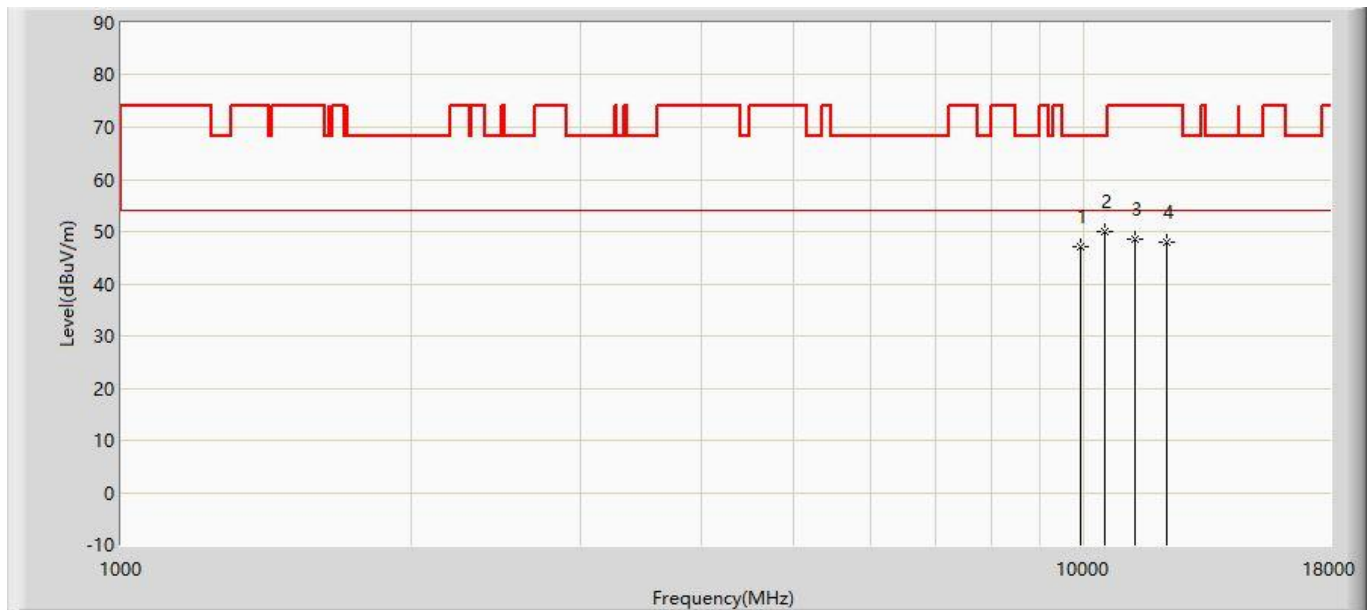


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9908.000	47.065	32.106	-21.135	68.200	14.959	PK
2	*	10520.000	49.961	33.063	-18.239	68.200	16.898	PK
3		11285.000	48.589	30.742	-25.411	74.000	17.847	PK
4		12203.000	47.830	30.017	-26.170	74.000	17.813	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5300MHz with OAW-AP1322	

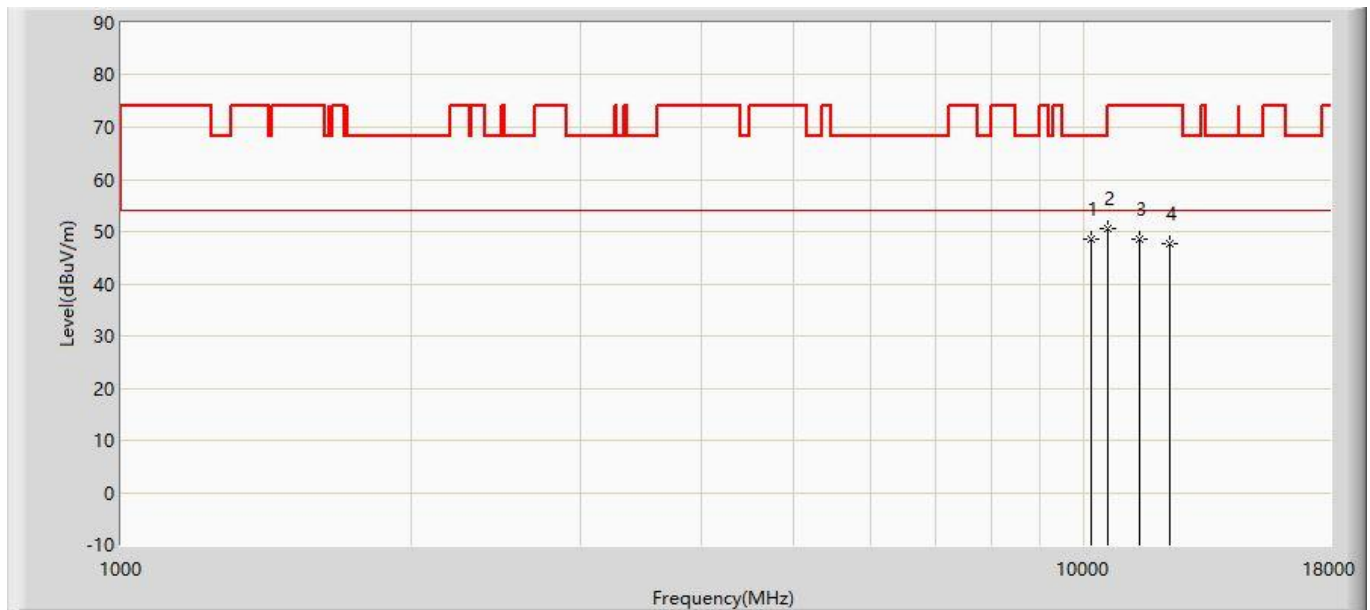


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10154.500	48.568	32.810	-19.632	68.200	15.759	PK
2	*	10596.500	50.708	33.701	-17.492	68.200	17.007	PK
3		11438.000	48.655	30.664	-25.345	74.000	17.991	PK
4		12254.000	47.640	29.827	-26.360	74.000	17.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5300MHz with OAW-AP1322	

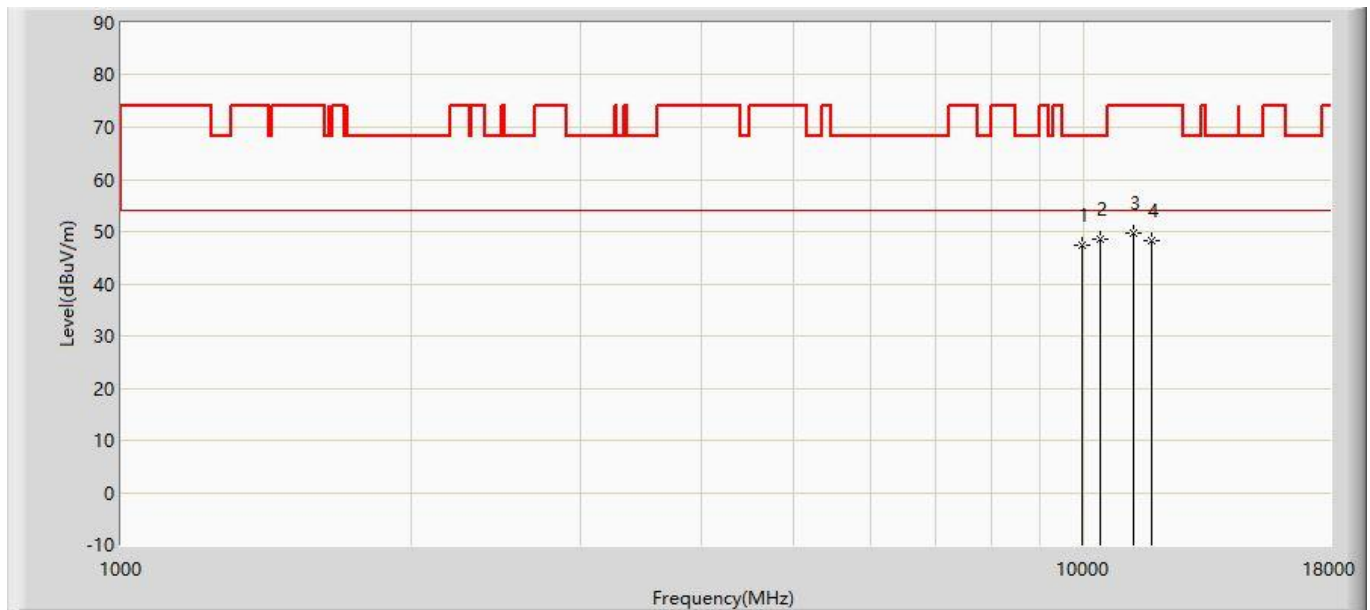


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9959.000	47.291	32.166	-20.909	68.200	15.125	PK
2	*	10392.500	48.509	31.986	-19.691	68.200	16.524	PK
3		11259.500	49.589	31.765	-24.411	74.000	17.824	PK
4		11735.500	48.382	30.441	-25.618	74.000	17.941	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz with OAW-AP1322	

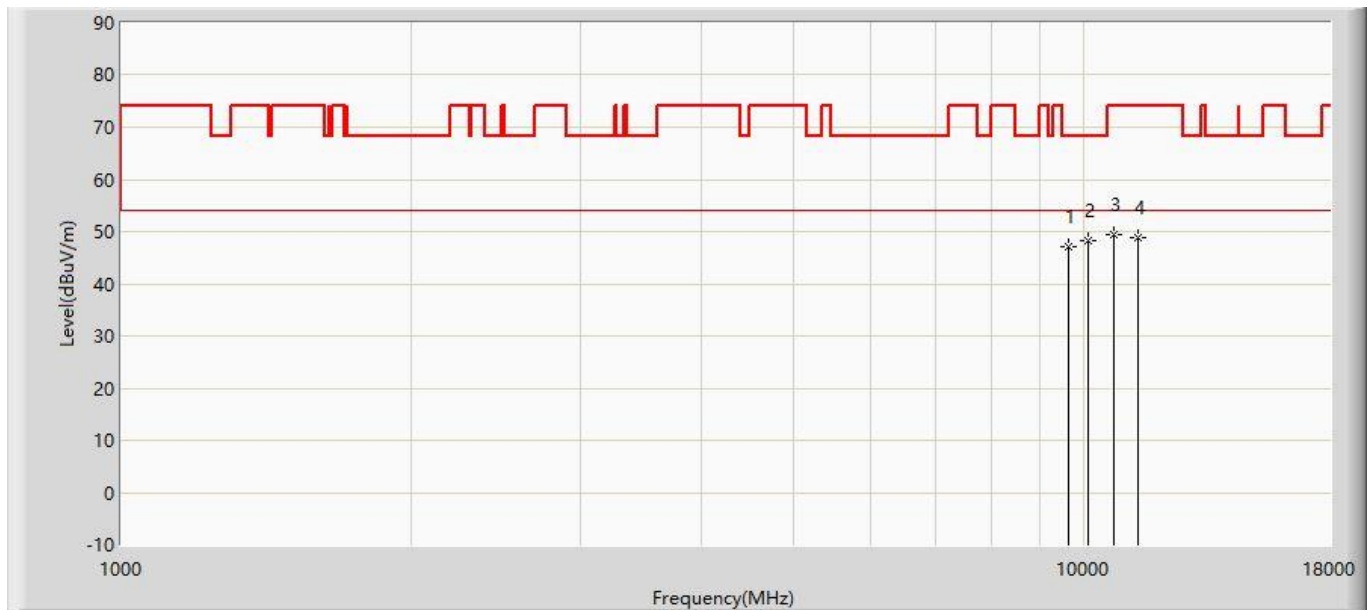


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9644.500	47.091	32.997	-21.109	68.200	14.094	PK
2	*	10095.000	48.166	32.600	-20.034	68.200	15.566	PK
3		10732.500	49.305	32.105	-24.695	74.000	17.200	PK
4		11370.000	48.973	31.045	-25.027	74.000	17.928	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz with OAW-AP1322	

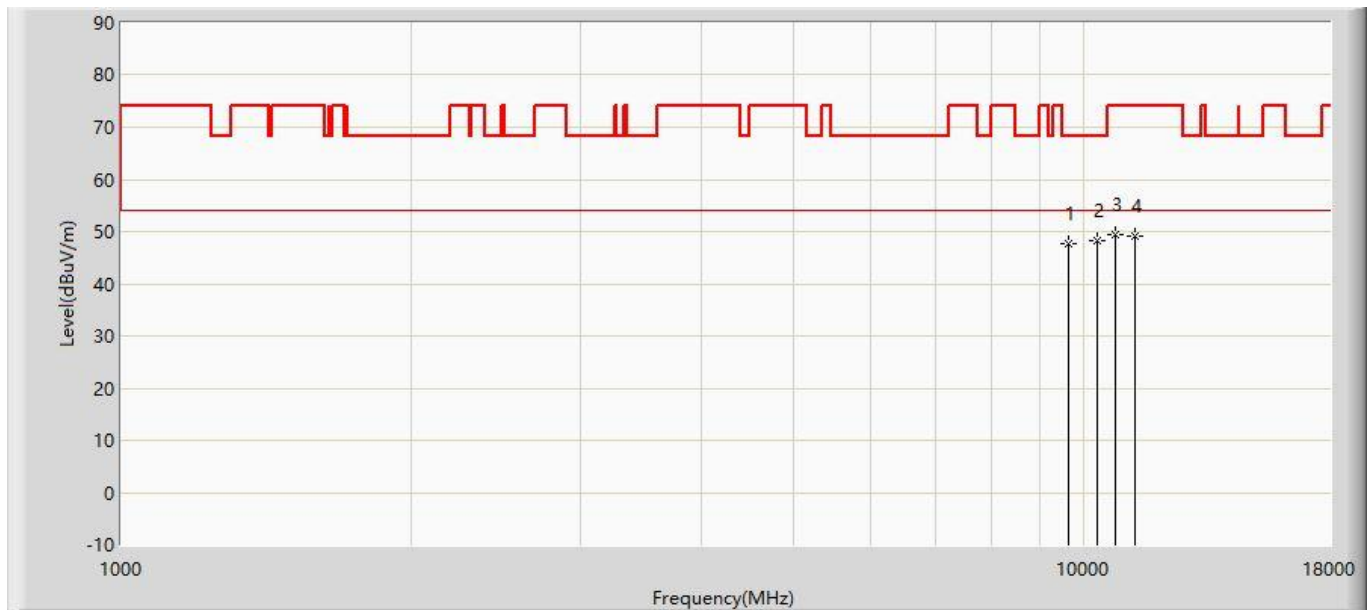


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		9627.500	47.545	33.507	-20.655	68.200	14.038	PK
2	*	10333.000	48.331	31.998	-19.869	68.200	16.333	PK
3		10783.500	49.536	32.263	-24.464	74.000	17.273	PK
4		11285.000	49.011	31.164	-24.989	74.000	17.847	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz with OAW-AP1322	

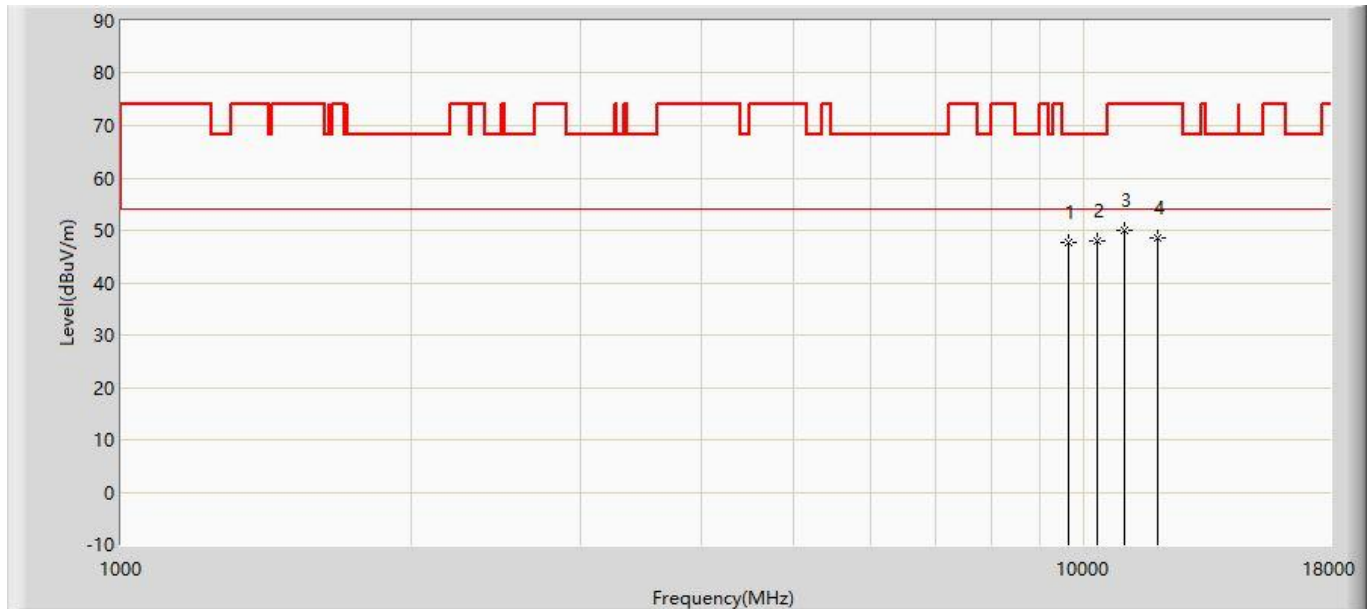


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.768	33.674	-20.432	68.200	14.094	PK
2		*	10316.000	47.926	31.648	-20.274	68.200	16.278	PK
3			10996.000	49.888	32.313	-24.112	74.000	17.575	PK
4			11914.000	48.491	30.631	-25.509	74.000	17.860	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz with OAW-AP1322	

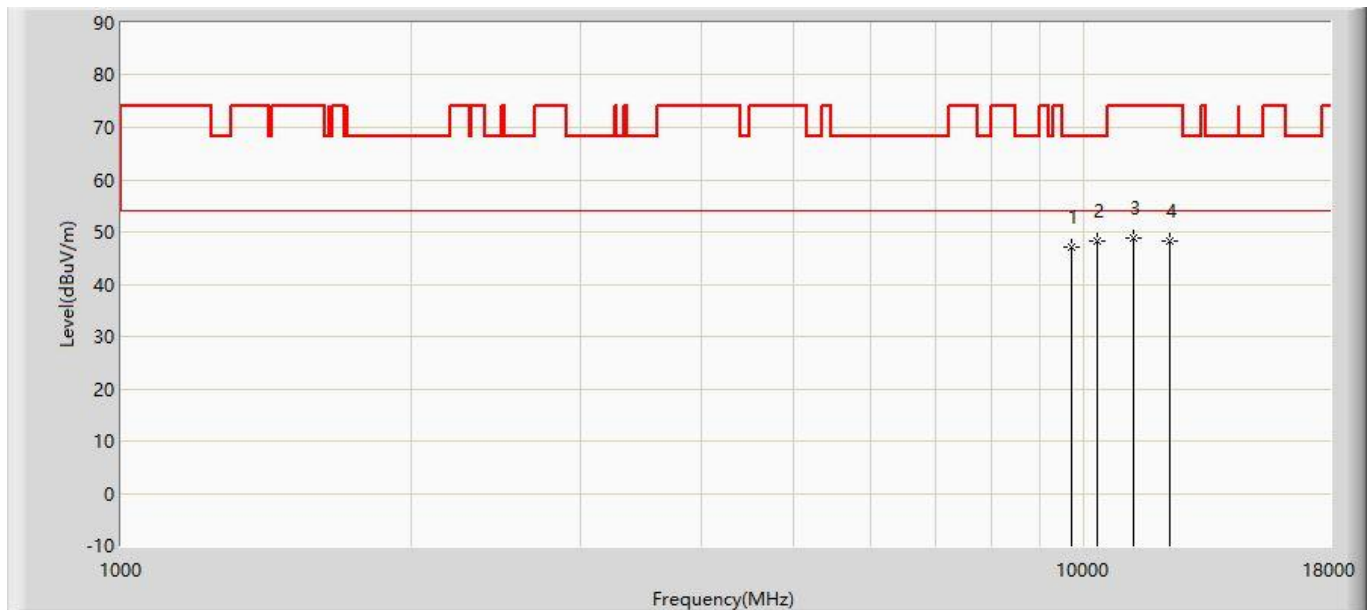


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9695.500	47.081	32.820	-21.119	68.200	14.261	PK
2		*	10333.000	48.327	31.994	-19.873	68.200	16.333	PK
3			11268.000	48.967	31.135	-25.033	74.000	17.832	PK
4			12288.000	48.170	30.359	-25.830	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5600MHz with OAW-AP1322	

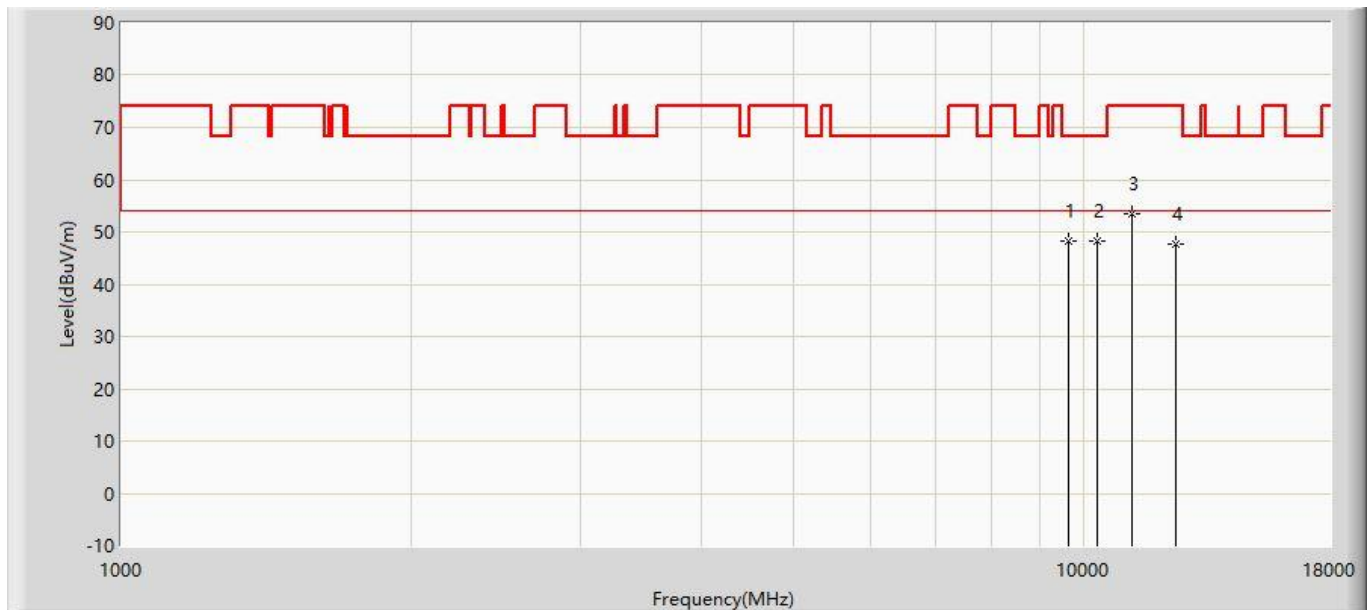


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	48.314	34.220	-19.886	68.200	14.094	PK
2			10333.000	48.169	31.836	-20.031	68.200	16.333	PK
3			11200.000	53.372	35.604	-20.628	74.000	17.768	PK
4			12449.500	47.779	29.973	-26.221	74.000	17.806	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5600MHz with OAW-AP1322	

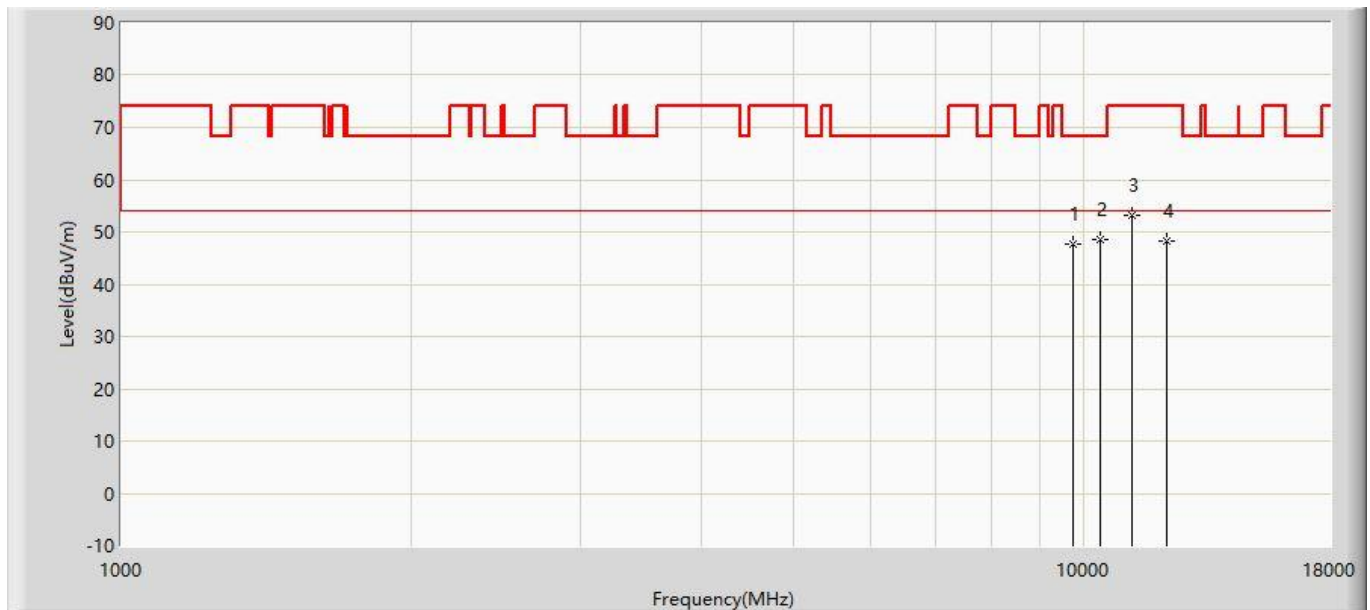


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	47.768	33.339	-20.432	68.200	14.428	PK
2		*	10401.000	48.634	32.083	-19.566	68.200	16.551	PK
3			11200.000	53.056	35.288	-20.944	74.000	17.768	PK
4			12177.500	48.131	30.316	-25.869	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz with OAW-AP1322	

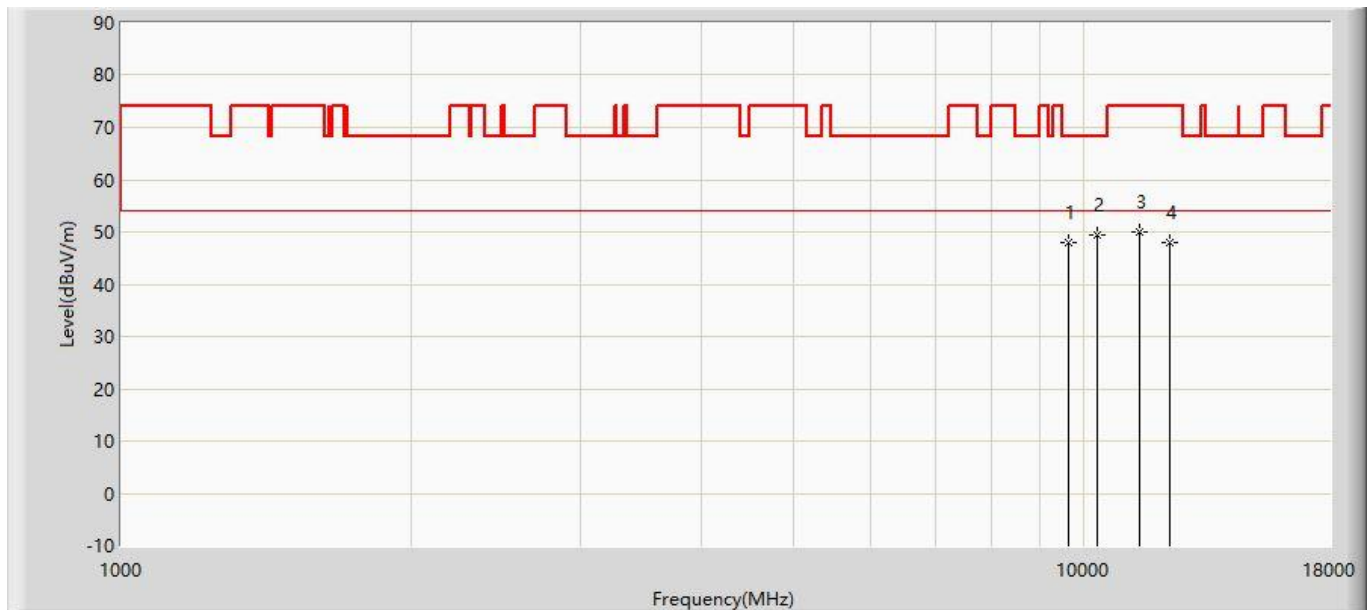


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.109	34.015	-20.091	68.200	14.094	PK
2		*	10333.000	49.353	33.020	-18.847	68.200	16.333	PK
3			11404.000	50.066	32.106	-23.934	74.000	17.960	PK
4			12262.500	48.031	30.219	-25.969	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz with OAW-AP1322	

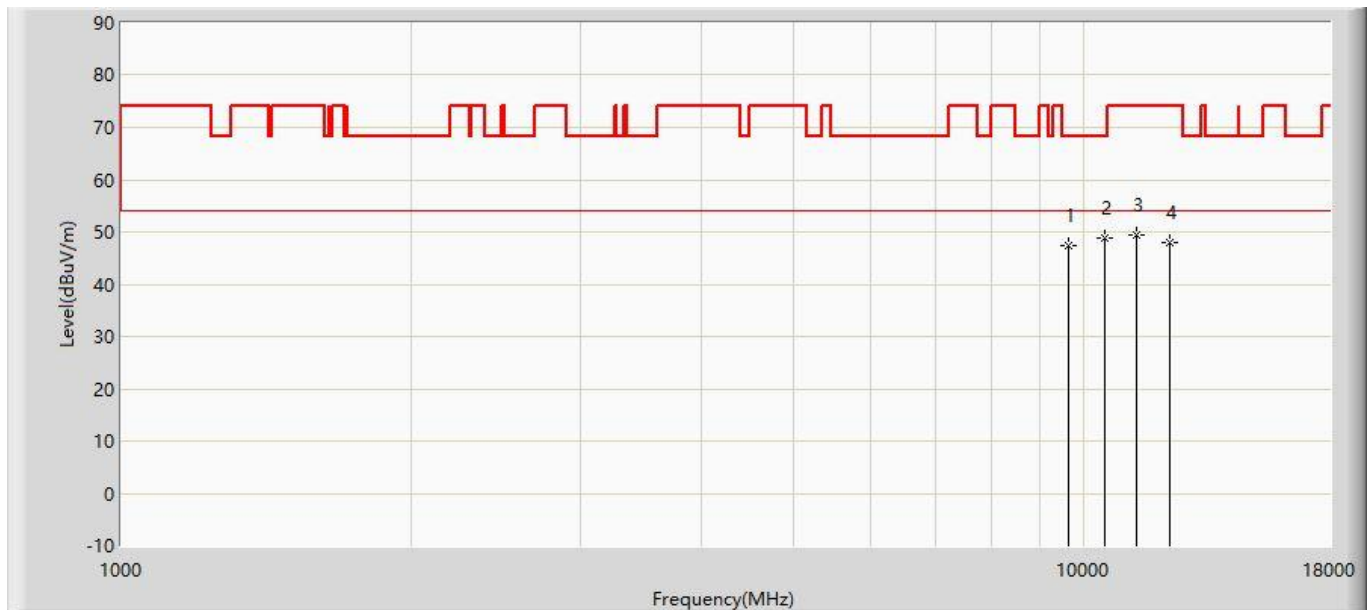


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.366	33.272	-20.834	68.200	14.094	PK
2		*	10494.500	48.884	32.035	-19.316	68.200	16.849	PK
3			11319.000	49.320	31.440	-24.680	74.000	17.880	PK
4			12262.500	48.031	30.219	-25.969	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5720MHz with OAW-AP1322	

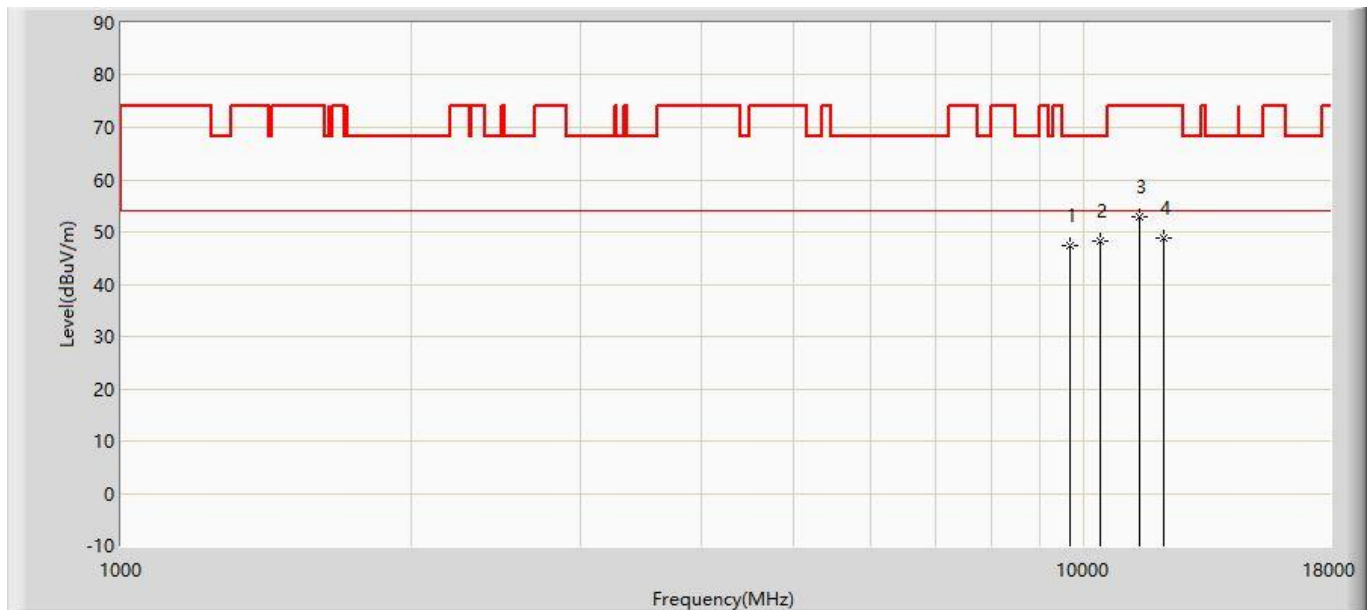


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9678.500	47.328	33.123	-20.872	68.200	14.205	PK
2		*	10392.500	48.210	31.687	-19.990	68.200	16.524	PK
3			11438.000	53.005	35.014	-20.995	74.000	17.991	PK
4			12092.500	48.825	31.008	-25.175	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5720MHz with OAW-AP1322	

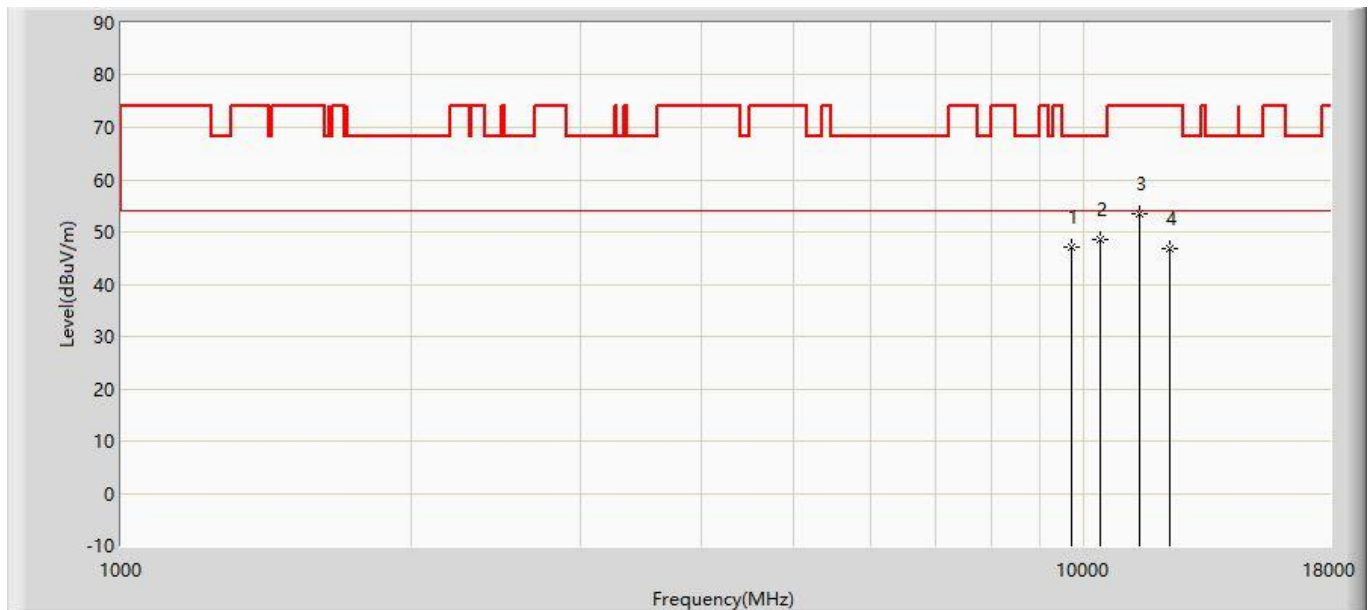


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9687.000	47.223	32.991	-20.977	68.200	14.232	PK
2		*	10401.000	48.457	31.906	-19.743	68.200	16.551	PK
3			11438.000	53.424	35.433	-20.576	74.000	17.991	PK
4			12271.000	46.729	28.918	-27.271	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz with OAW-AP1322	

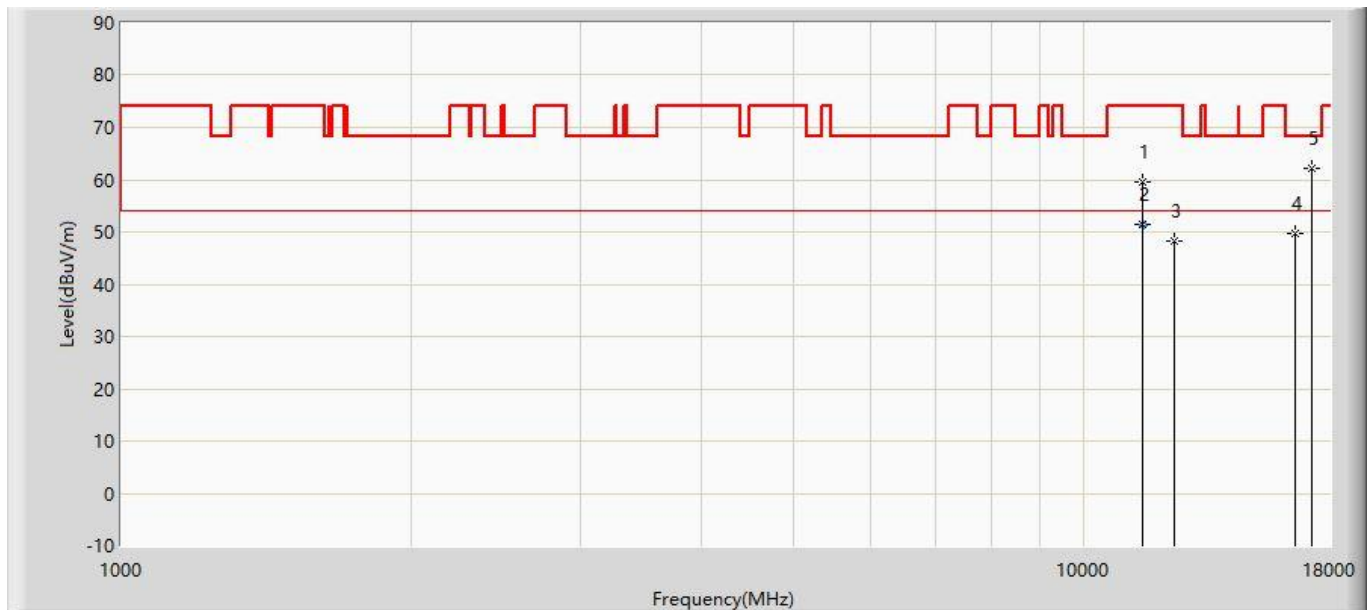


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	59.703	41.663	-14.297	74.000	18.040	PK
2		*	11490.450	51.410	33.370	-2.590	54.000	18.041	AV
3			12398.500	48.312	30.504	-25.688	74.000	17.807	PK
4			16572.000	49.821	27.350	-18.379	68.200	22.471	PK
5			17235.000	62.135	34.402	-6.065	68.200	27.733	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz with OAW-AP1322	

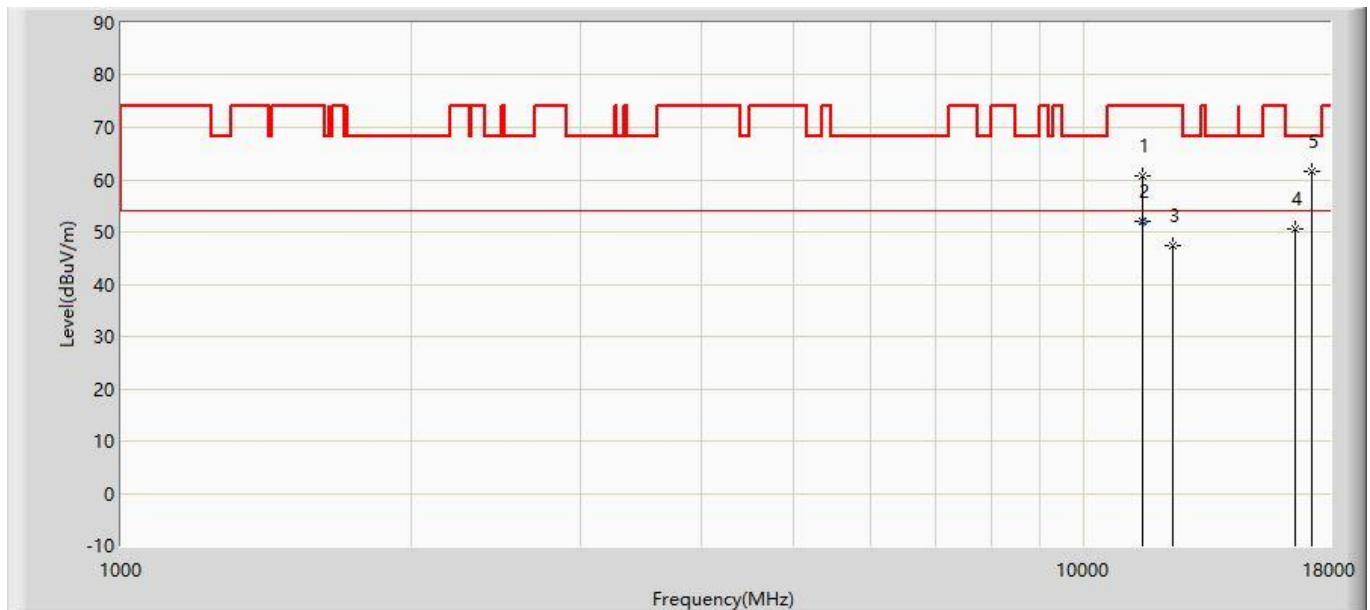


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	60.861	42.821	-13.139	74.000	18.040	PK
2		*	11490.040	51.927	33.887	-2.073	54.000	18.040	AV
3			12347.500	47.339	29.530	-26.661	74.000	17.809	PK
4			16563.500	50.696	28.285	-17.504	68.200	22.411	PK
5			17226.500	61.673	34.020	-6.527	68.200	27.653	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 09:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5785MHz with OAW-AP1322	

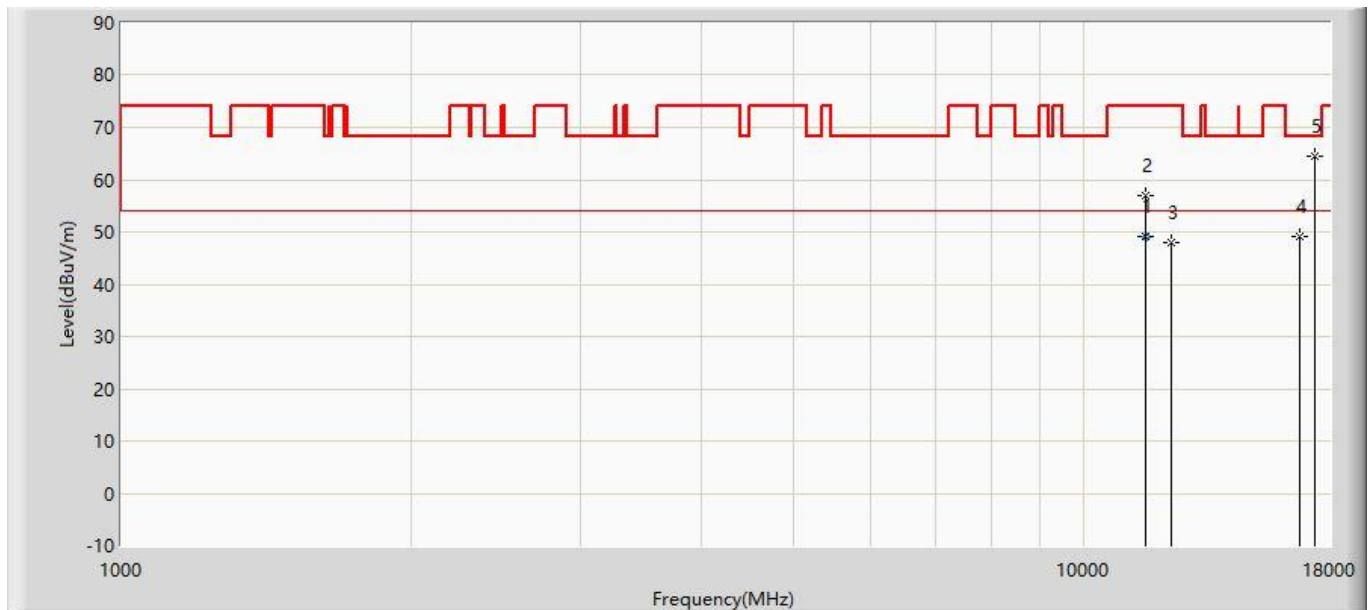

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11572.000	49.229	31.212	-4.771	54.000	18.017	AV
2			11574.000	56.878	38.862	-17.122	74.000	18.016	PK
3			12296.500	47.857	30.046	-26.143	74.000	17.811	PK
4			16742.000	49.059	25.381	-19.141	68.200	23.678	PK
5		*	17345.500	64.516	35.738	-3.684	68.200	28.778	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)