


附錄一

受測裝置之測試結果

目錄	頁次
1. 電源線傳導干擾之量測.....	2
2. 場強輻射之量測.....	4
2.1. 30-1000MHz 頻率範圍，其他不必要發射量測	5
2.2. 1000MHz 以上頻率範圍，其他不必要發射量測	7
2.3. 禁用頻帶量測結果 (其他不必要發射).....	9
3. 發射頻寬之量測.....	13
3.1. 發射頻寬.....	13
3.2. 發射頻寬之量測圖.....	14
4. 峰值輸出功率之量測.....	15
4.1. 峰值輸出功率.....	15
4.2. 峰值輸出功率之量測圖.....	16
5. 頻帶邊緣之 RF 傳導發射之量測	17
6. 混附發射之 RF 傳導發射之量測	18
7. 功率密度之量測.....	21
7.1. 功率密度.....	21
7.2. 功率密度之量測圖.....	21

1. 電源線傳導干擾之量測

測試日期	2021/10/14	環境溫/濕度	27°C/50%
測試電壓	DC 5V (經 USB 電源供電)		

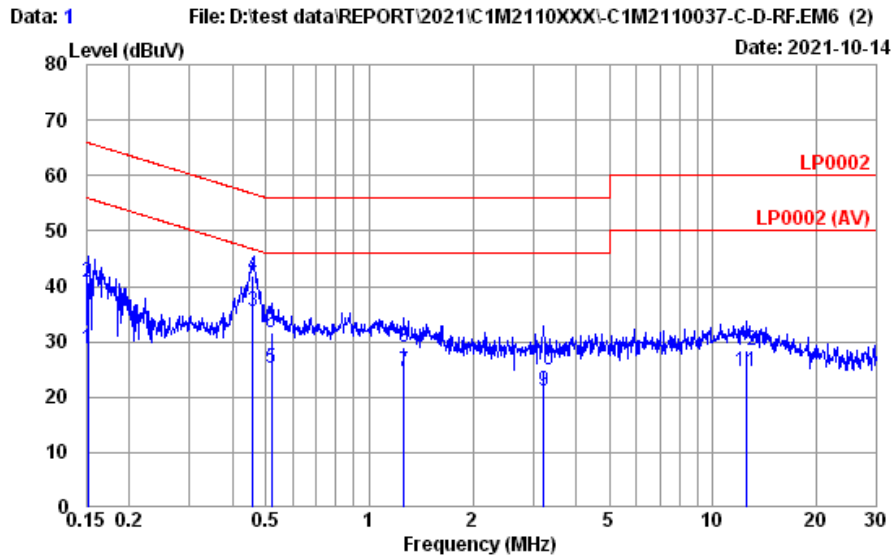


Site No. : No.8 Shielded Room Data No. : 1
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : LP0002 Phase : NEUTRAL
 Environment : 27°C / 50% Engineer : Roy Hung
 EUT Model : WH-XB910H Test Rating : 110Vac/60Hz
 Test Mode : Normal+Charge

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	8.56	28.85	55.91	27.06	Average
2	0.152	10.41	0.03	9.85	20.41	40.70	65.91	25.21	QP
3	0.459	10.37	0.03	9.85	15.21	35.46	46.71	11.25	Average
4	0.459	10.37	0.03	9.85	21.69	41.94	56.71	14.77	QP
5	0.518	10.37	0.03	9.85	5.00	25.25	46.00	20.75	Average
6	0.518	10.37	0.03	9.85	11.49	31.74	56.00	24.26	QP
7	1.262	10.39	0.05	9.85	4.44	24.73	46.00	21.27	Average
8	1.262	10.39	0.05	9.85	8.66	28.95	56.00	27.05	QP
9	3.224	10.44	0.08	9.86	0.57	20.95	46.00	25.05	Average
10	3.224	10.44	0.08	9.86	4.49	24.87	56.00	31.13	QP
11	12.449	10.81	0.15	9.90	3.69	24.55	50.00	25.45	Average
12	12.449	10.81	0.15	9.90	7.63	28.49	60.00	31.51	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

測試日期	2021/10/14	環境溫/濕度	27°C/50%
測試電壓	DC 5V (經 USB 電源供電)		

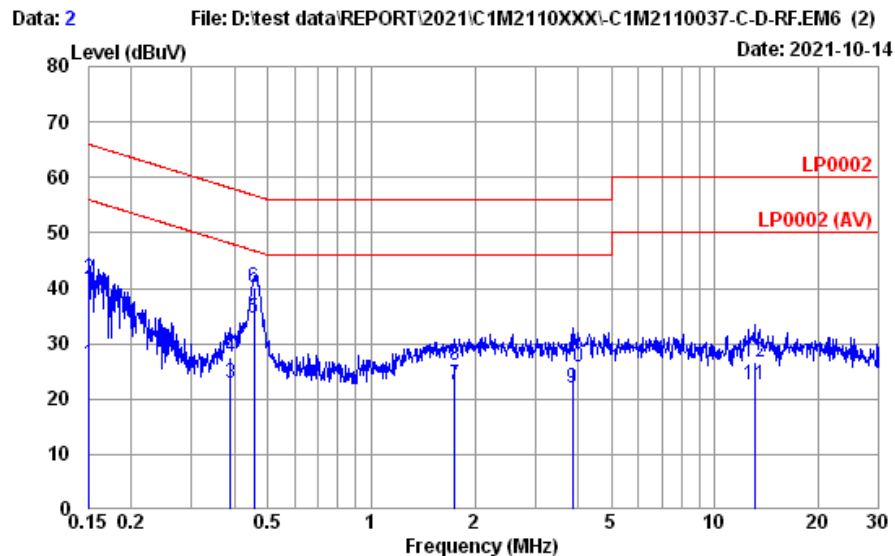

Site No. : No.8 Shielded Room Data No. : 2
Instrument 1 : Receiver ESR3(774)
Instrument 2 : EHV432 (567)(A) | CE-08 | ESH3-Z2 (354)
Limit : LP0002 Phase : LINE
Environment : 27°C / 50% Engineer : Roy Hung
EUT Model : WH-XB910W Test Rating : 110Vac/60Hz
Test Mode : Normal+Charge

	Freq. (MHz)	AMF Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.40	0.03	9.85	6.11	26.39	55.96	29.57	Average
2	0.151	10.40	0.03	9.85	21.36	41.64	65.96	24.32	QP
3	0.389	10.37	0.03	9.85	2.60	22.85	48.08	25.23	Average
4	0.389	10.37	0.03	9.85	7.27	27.52	58.08	30.56	QP
5	0.456	10.37	0.03	9.85	14.46	34.71	46.76	12.05	Average
6	0.456	10.37	0.03	9.85	19.80	40.05	56.76	16.71	QP
7	1.753	10.40	0.06	9.86	2.35	22.67	46.00	23.33	Average
8	1.753	10.40	0.06	9.86	5.79	26.11	56.00	29.89	QP
9	3.860	10.42	0.09	9.86	1.70	22.07	46.00	23.93	Average
10	3.860	10.42	0.09	9.86	5.32	25.69	56.00	30.31	QP
11	13.057	10.64	0.16	9.90	1.76	22.46	50.00	27.54	Average
12	13.057	10.64	0.16	9.90	5.96	26.66	60.00	33.34	QP

Remarks: 1. Emission Level= AMF Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

2. 場強輻射之量測

【經實驗室評估量測後，以最差之傳輸速率 2M 進行本章節之測試】

本裝置有兩種電源供應模式分別為(1)電池(DC 3.85V)、(2)USB 供電(DC 5V)，實實驗室以 USB 供電及單機(電池供電)先行評估三種不同的擺設方式(站立、平放、側立)，最後選取最大場強值的擺設方式單機(電池供電，站立)，依下列測試模式進行量測，並將下列測試模式之測試數據隨案件所附。所得讀值資料請見章節 2.1 ~2.2：

模式	動作狀態	基本頻率	量測頻率範圍
Normal+Charge	---	---	30-1000MHz
			1000-25000MHz
模式	動作狀態	基本頻率	量測頻率範圍
BLE	發射	2402MHz	1000-25000MHz
		2440MHz*	30-1000MHz
			1000-25000MHz
		2480MHz	1000-25000MHz
	接收	2440MHz	30-1000MHz
			1000-25000MHz

註:*. 經評估後，以最差頻率進行 30-1000MHz 量測。

對受測物裝置落於技術規範第 3.5 章節的禁用頻帶之混附發射以下列測試模式依規定分別進行量測，所得量測資料請見章節 2.3。

模式	動作狀態	基本頻率	量測頻率範圍
BLE	發射	2402MHz	2310-2410MHz
		2480MHz	2430-2930MHz

測試日期	2021/10/15 ~ 18	環境溫/濕度	24 ~ 26°C/47 ~ 51%
測試電壓	(1)DC 5V (經 USB 電源供電) (2)DC 3.85V (經鋰電池供電)	測試人員	Martin Chen

2.1. 30-1000MHz 頻率範圍，其他不必要發射量測

- Normal+Charge 模式

Mode	Normal+Charge	Frequency	---
------	---------------	-----------	-----

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.820	21.22	1.30	26.50	34.07	30.09	40.00	9.91	Peak
120.210	17.96	2.53	26.17	34.91	29.23	43.50	14.27	Peak
222.060	16.56	3.59	25.78	37.29	31.66	46.00	14.34	Peak
384.050	21.06	5.36	26.39	34.97	35.00	46.00	11.00	Peak
535.370	23.57	6.56	27.27	30.99	33.85	46.00	12.15	Peak
978.660	26.96	8.86	26.75	29.31	38.38	54.00	15.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	26.51	40.31	38.26	40.00	1.74	Peak
120.210	17.96	2.53	26.17	38.29	32.61	43.50	10.89	Peak
535.370	23.57	6.56	27.27	32.79	35.65	46.00	10.35	Peak
689.600	24.74	7.22	27.46	30.44	34.94	46.00	11.06	Peak
873.900	26.22	8.29	27.11	29.80	37.20	46.00	8.80	Peak
979.630	26.96	8.86	26.75	28.81	37.88	54.00	16.12	Peak

● BLE 測試模式

Mode	BLE			Frequency	TX 2440MHz			
------	-----	--	--	-----------	------------	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.820	21.22	1.30	26.50	32.95	28.97	40.00	11.03	Peak
120.210	17.96	2.53	26.17	34.66	28.98	43.50	14.52	Peak
225.940	16.80	3.63	25.77	36.17	30.83	46.00	15.17	Peak
471.350	22.68	6.20	27.00	33.67	35.55	46.00	10.45	Peak
900.090	26.30	8.44	27.04	29.83	37.53	46.00	8.47	Peak
1000.000	27.13	8.97	26.69	28.51	37.92	54.00	16.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	26.51	40.05	38.00	40.00	2.00	Peak
120.210	17.96	2.53	26.17	37.79	32.11	43.50	11.39	Peak
508.210	23.22	6.46	27.20	32.25	34.73	46.00	11.27	Peak
771.080	25.63	7.67	27.36	29.43	35.37	46.00	10.63	Peak
885.540	26.25	8.35	27.09	29.47	36.98	46.00	9.02	Peak
973.810	26.91	8.83	26.75	29.16	38.15	54.00	15.85	Peak

Mode	---			Frequency	RX 2440MHz			
------	-----	--	--	-----------	------------	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
36.790	20.71	1.32	26.50	32.67	28.20	40.00	11.80	Peak
120.210	17.96	2.53	26.17	35.16	29.48	43.50	14.02	Peak
222.060	16.56	3.59	25.78	39.18	33.55	46.00	12.45	Peak
781.750	25.76	7.72	27.35	30.41	36.54	46.00	9.46	Peak
838.980	26.09	8.07	27.20	30.04	37.00	46.00	9.00	Peak
1000.000	27.13	8.97	26.69	28.96	38.37	54.00	15.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	26.51	39.64	37.59	40.00	2.41	Peak
120.210	17.96	2.53	26.17	38.53	32.85	43.50	10.65	Peak
473.290	22.70	6.22	27.00	32.01	33.93	46.00	12.07	Peak
581.930	24.12	6.72	27.39	30.67	34.12	46.00	11.88	Peak
879.720	26.23	8.31	27.09	29.41	36.86	46.00	9.14	Peak
1000.000	27.13	8.97	26.69	28.43	37.84	54.00	16.16	Peak

2.2. 1000MHz 以上頻率範圍，其他不必要發射量測

頻率範圍量測至主波發射的 10 倍諧波，其他未列在報告上乃因訊號太小無法量測。

● Normal+Charge 模式

Mode	Normal+Charge			Frequency	TX 2402MHz			
------	---------------	--	--	-----------	------------	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2050.000	28.40	5.47	40.00	48.86	42.73	54.00	11.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2032.000	28.33	5.45	40.01	49.54	43.31	54.00	10.69	Peak

● BLE 測試模式

Mode	BLE			Frequency	TX 2402MHz			
------	-----	--	--	-----------	------------	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.10	8.68	39.39	43.15	45.54	54.00	8.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.10	8.68	39.39	43.81	46.20	54.00	7.80	Peak

Mode	BLE			Frequency	TX 2440MHz			
------	-----	--	--	-----------	------------	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.20	8.72	39.35	44.43	47.00	54.00	7.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.20	8.72	39.35	44.94	47.51	54.00	6.49	Peak

Mode	BLE			Frequency	TX 2480MHz			
------	-----	--	--	-----------	------------	--	--	--

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.38	8.77	39.31	43.88	46.72	54.00	7.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.38	8.77	39.31	44.46	47.30	54.00	6.70	Peak

Mode	BLE			Frequency	RX 2440MHz			
------	-----	--	--	-----------	------------	--	--	--

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2012.000	28.25	5.42	40.01	49.62	43.28	54.00	10.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2008.000	28.23	5.39	40.01	49.82	43.43	54.00	10.57	Peak


2.3. 禁用頻帶量測結果 (其他不必要發射)

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

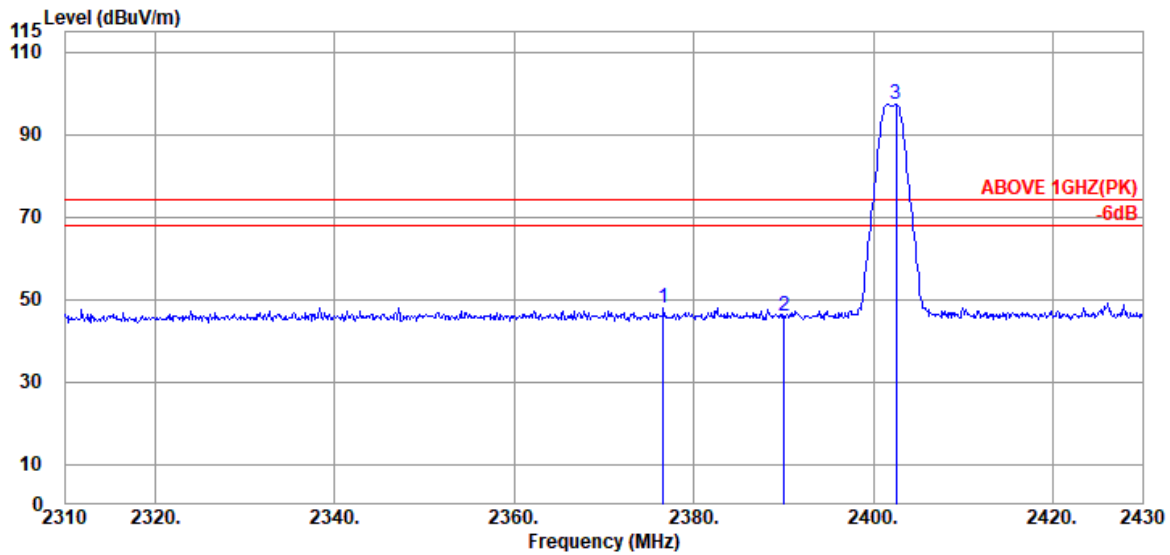

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.600	28.20	6.01	39.96	53.73	47.98	74.00	26.02	Peak
2390.040	28.20	6.04	39.95	51.49	45.78	74.00	28.22	Peak
@ 2402.520	28.20	6.07	39.95	103.02	97.34	---	---	Peak

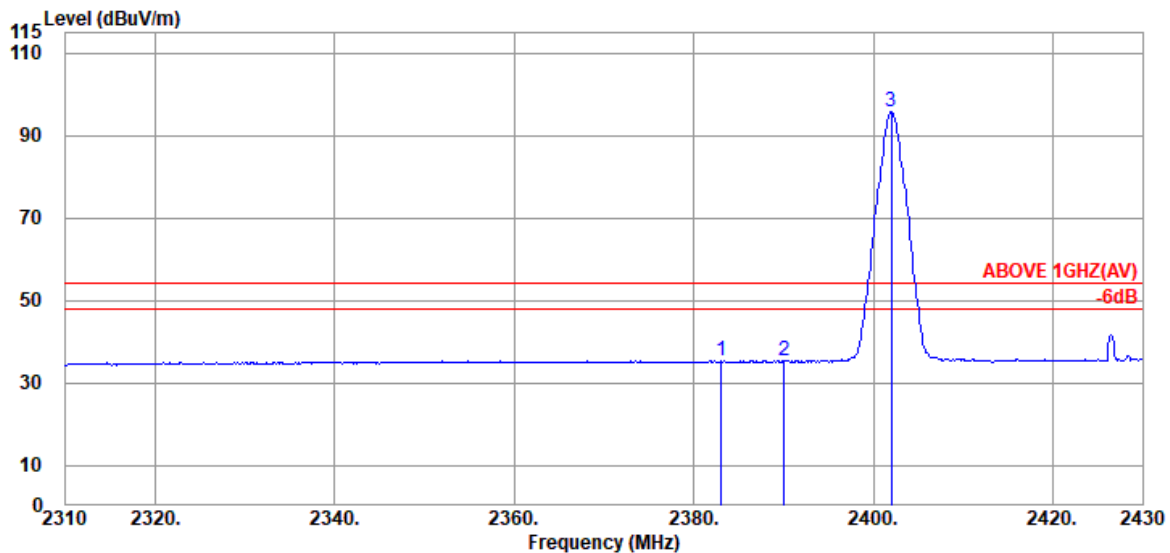


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.080	28.20	6.01	39.96	41.02	35.27	54.00	18.73	Average
2390.040	28.20	6.04	39.95	40.88	35.17	54.00	18.83	Average
@ 2402.040	28.20	6.04	39.95	101.45	95.74	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

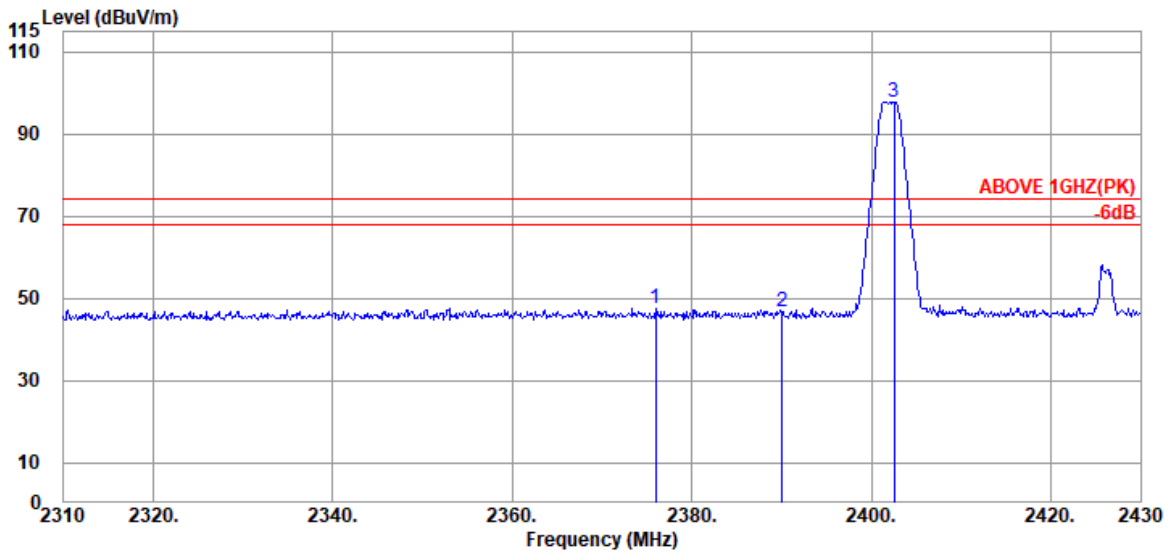

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.000	28.20	6.01	39.96	53.16	47.41	74.00	26.59	Peak
2390.040	28.20	6.04	39.95	52.34	46.63	74.00	27.37	Peak
@ 2402.520	28.20	6.07	39.95	103.60	97.92	---	---	Peak

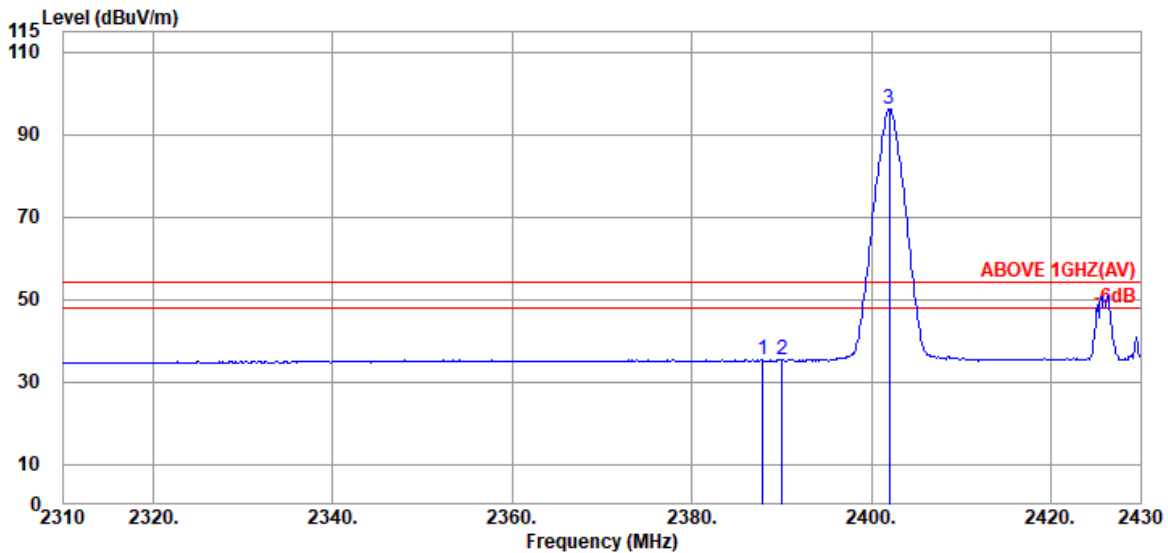


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.880	28.20	6.04	39.95	40.95	35.24	54.00	18.76	Average
2390.040	28.20	6.04	39.95	40.94	35.23	54.00	18.77	Average
@ 2402.040	28.20	6.04	39.95	101.89	96.18	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

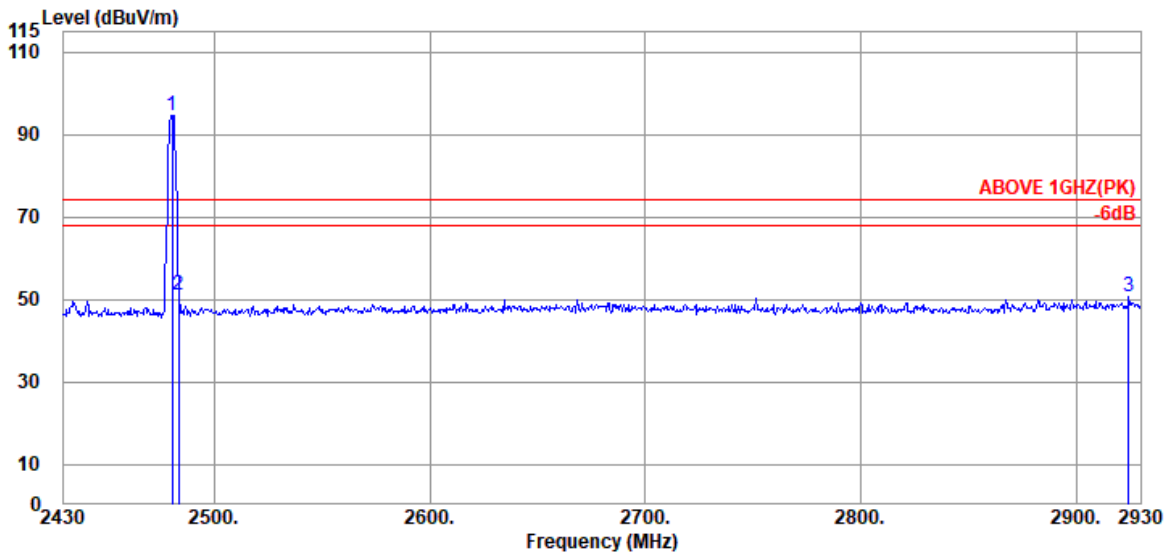

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	28.46	6.18	39.94	99.96	94.66	---	---	Peak
	2483.500	28.47	6.18	39.94	56.31	51.02	74.00	22.98	Peak
	2924.500	29.85	6.75	40.06	53.95	50.49	74.00	23.51	Peak

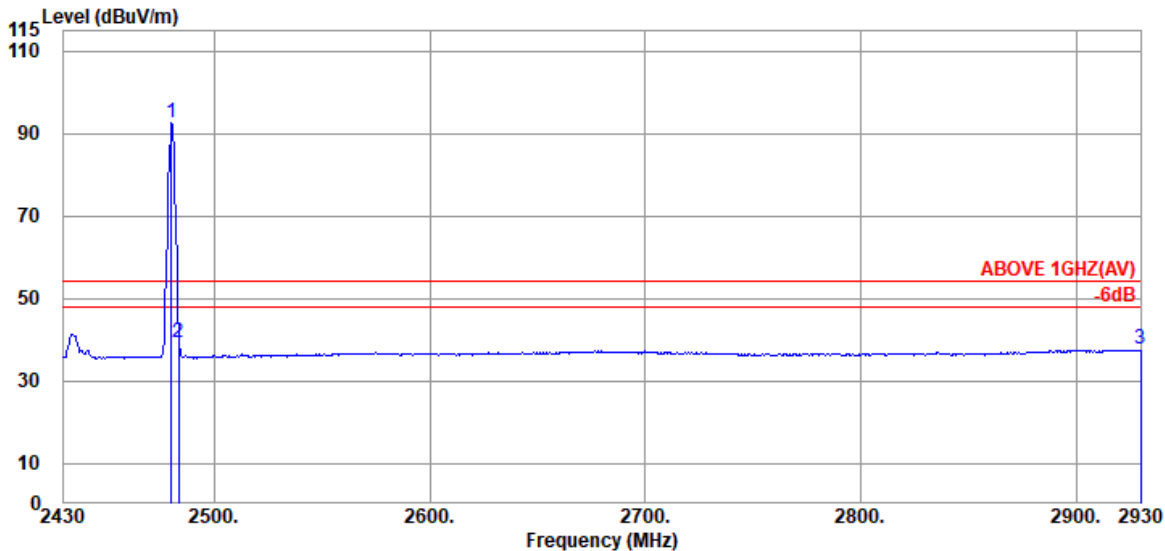


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.000	28.46	6.18	39.94	97.90	92.60	---	---	Average
	2483.500	28.47	6.18	39.94	44.56	39.27	54.00	14.73	Average
	2930.000	29.87	6.77	40.06	41.04	37.62	54.00	16.38	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

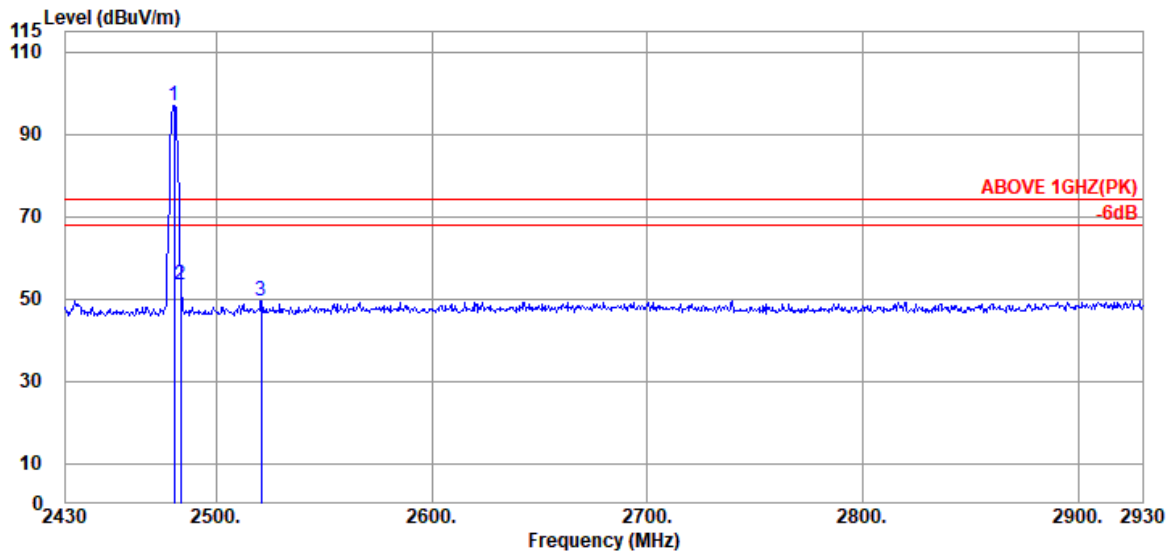

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	28.46	6.18	39.94	102.10	96.80	---	---	Peak
	2483.500	28.47	6.18	39.94	58.67	53.38	74.00	20.62	Peak
	2521.000	28.59	6.23	39.95	54.74	49.61	74.00	24.39	Peak

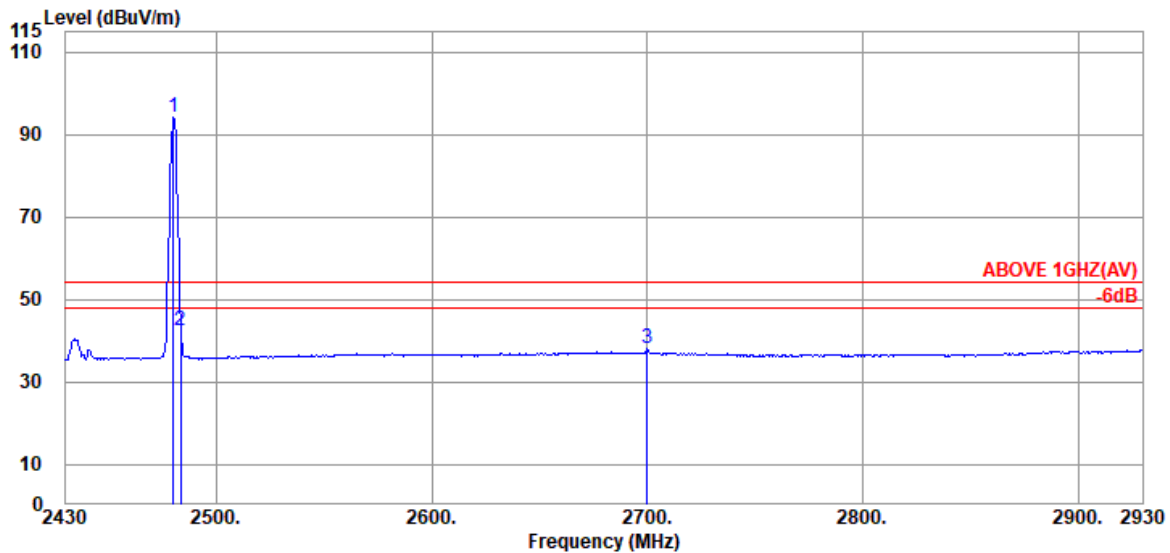

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.000	28.46	6.18	39.94	99.53	94.23	---	---	Average
	2483.500	28.47	6.18	39.94	47.59	42.30	54.00	11.70	Average
	2700.000	29.00	6.47	40.00	42.77	38.24	54.00	15.76	Average

備註：“@”為主波，在此章節是不予以判定。


3. 發射頻寬之量測

測試日期	2021/10/13	環境溫/濕度	24°C/58%
測試電壓	DC 3.85V (經鋰電池供電)	電纜損失	0.30dB
		測試人員	Martin Chen

3.1. 發射頻寬

模式	測試頻率 (MHz)	6dB 頻寬 (MHz)	限制值 (kHz)
BLE (1M)	2402	0.6708	>500
	2440	0.6720	
	2480	0.6704	
BLE (2M)	2402	1.250	>500
	2440	1.242	
	2480	1.245	

3.2. 發射頻寬之量測圖

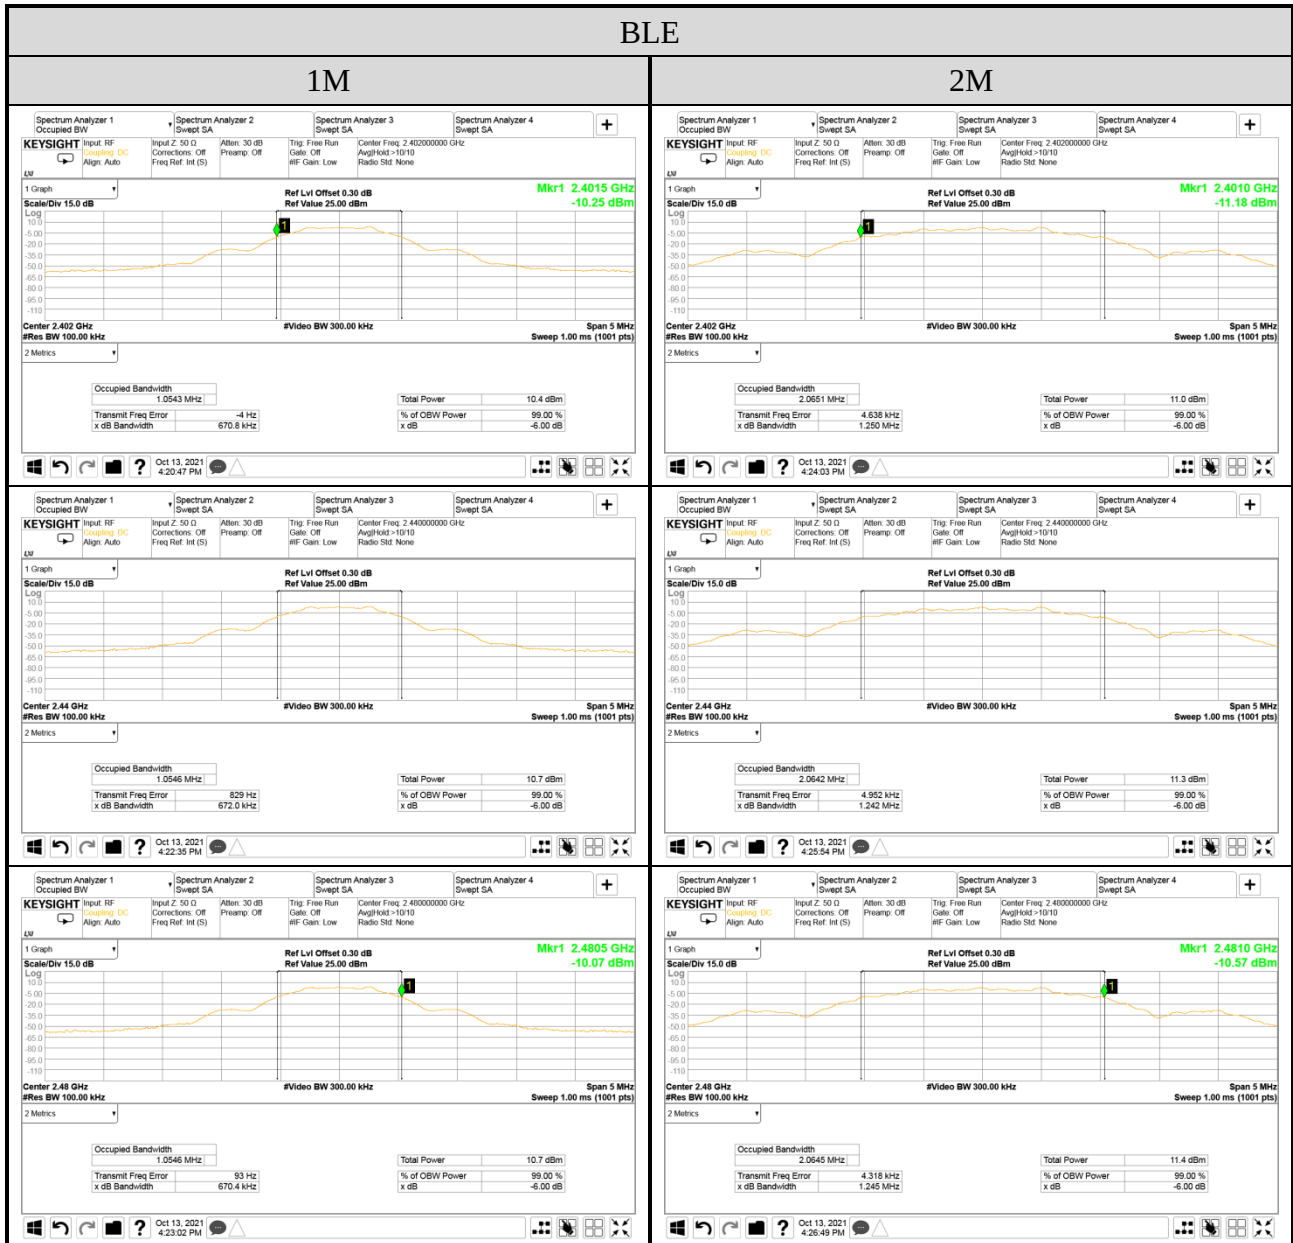


4. 峰值輸出功率之量測

測試日期	2021/10/13	環境溫/濕度	24°C/58%
測試電壓	DC 3.85V (經鋰電池供電)	電纜損失	0.30dB
		測試人員	Martin Chen

4.1. 峰值輸出功率


模式	測試頻率 (MHz)	輸出功率 (dBm)	限制值 (dBm)
BLE (1M)	2402	3.75	30
	2440	4.15	
	2480	4.11	
BLE (2M)	2402	3.82	30
	2440	4.15	
	2480	4.12	

4.2. 峰值輸出功率之量測圖

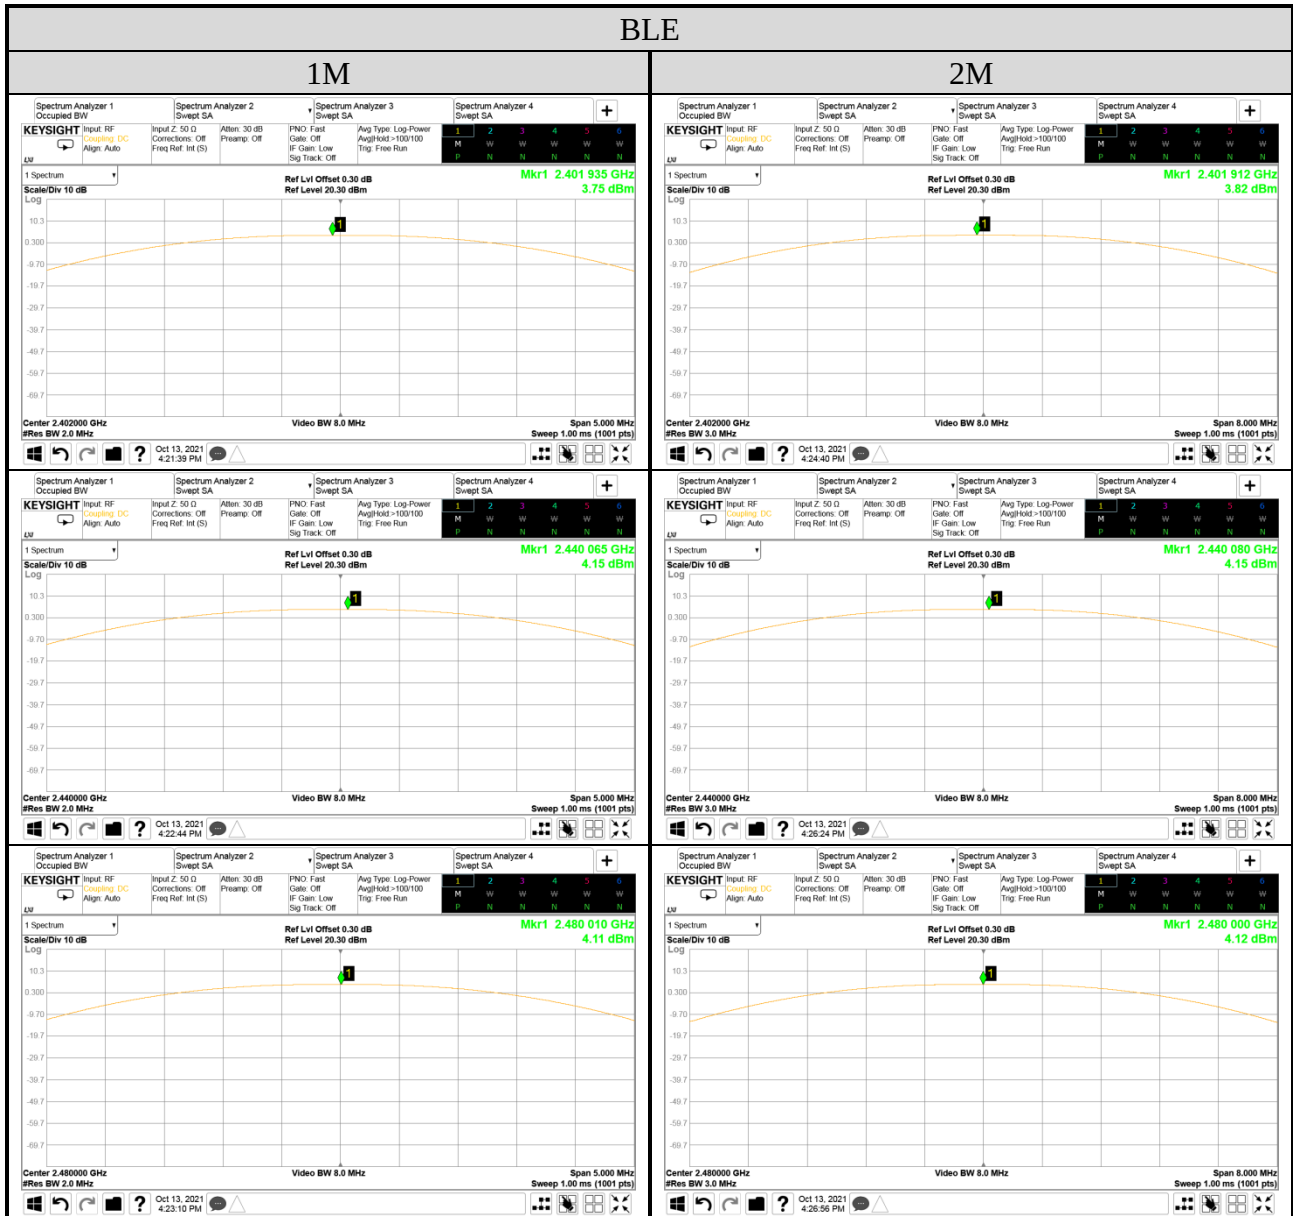


5. 頻帶邊緣之 RF 傳導發射之量測

測試日期	2021/10/13	環境溫/濕度	24°C/58%
測試電壓	DC 3.85V (經鋰電池供電)	電纜損失	0.30dB
		測試人員	Martin Chen




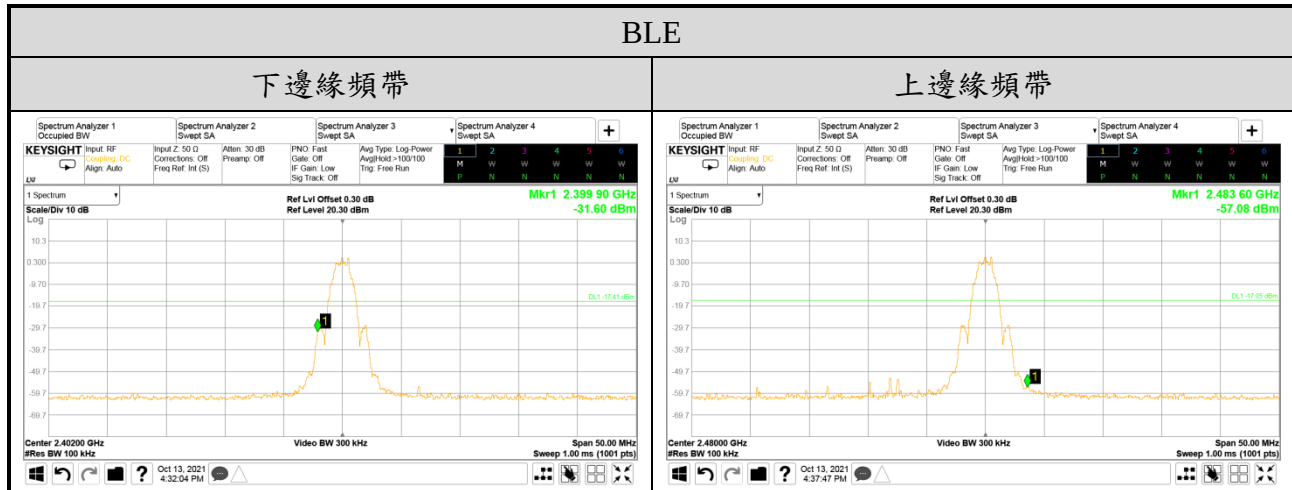


6. 混附發射之 RF 傳導發射之量測





測試日期	2021/10/13	環境溫/濕度	24°C/58%
電纜損失	0.30dB	測試人員	Martin Chen
測試電壓	DC 3.85V (經鋰電池供電)	模式	BLE
		測試頻率	2402MHz

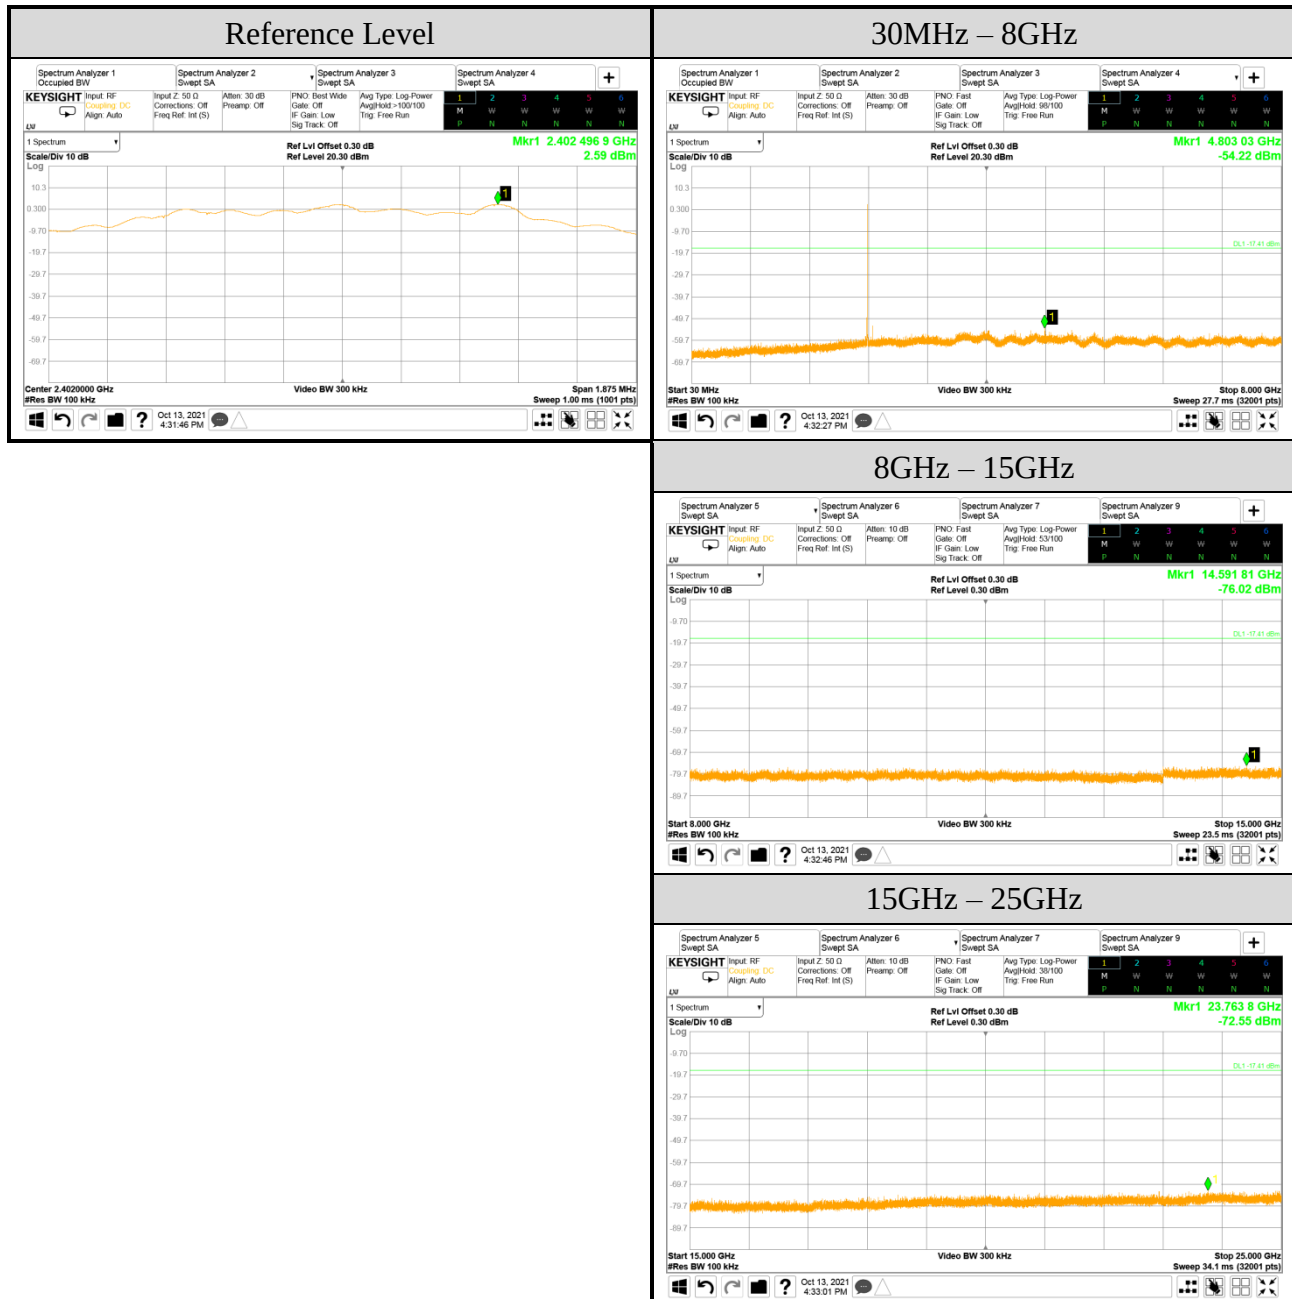

測試日期	2021/10/13	環境溫/濕度	24°C/58%
電纜損失	0.30dB	測試人員	Martin Chen
測試電壓	DC 3.85V (經鋰電池供電)	模式	BLE
		測試頻率	2440MHz

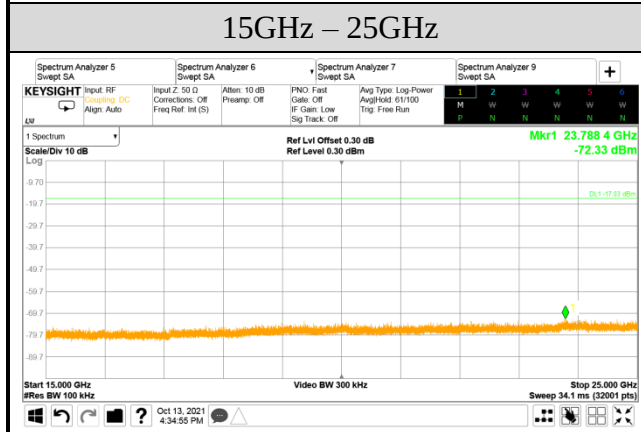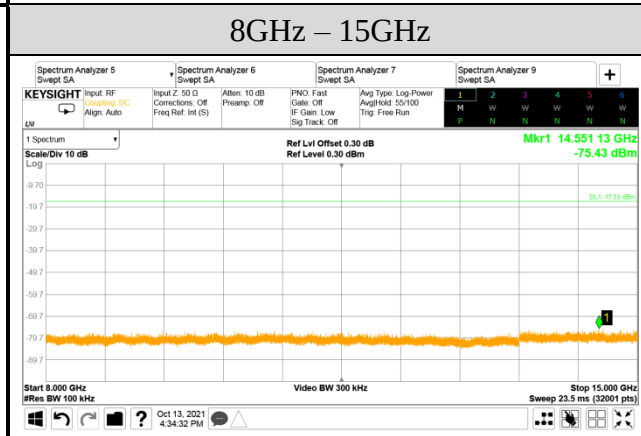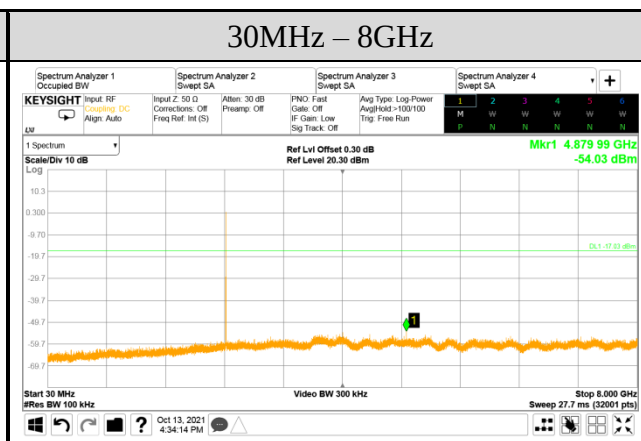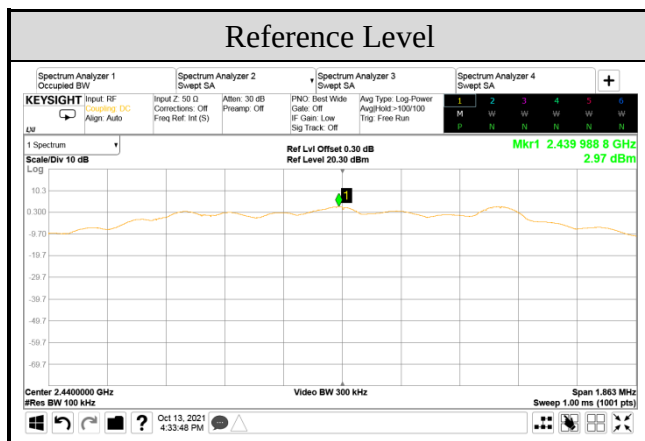

測試日期	2021/10/13	環境溫/濕度	24°C/58%
電纜損失	0.30dB	測試人員	Martin Chen
測試電壓	DC 3.85V (經鋰電池供電)	模式	BLE
		測試頻率	2480MHz

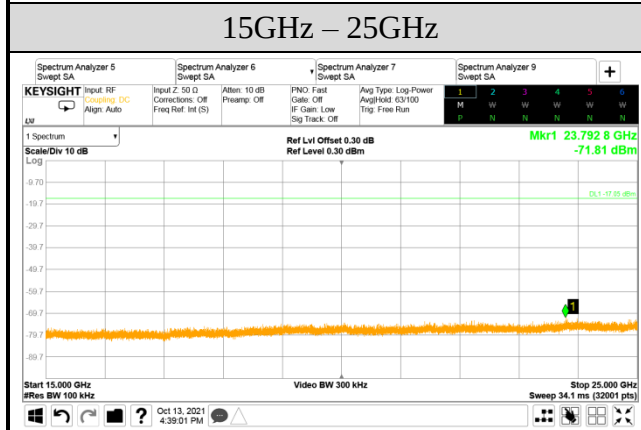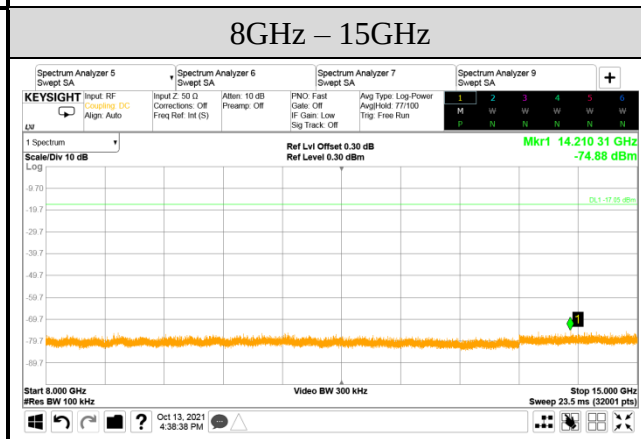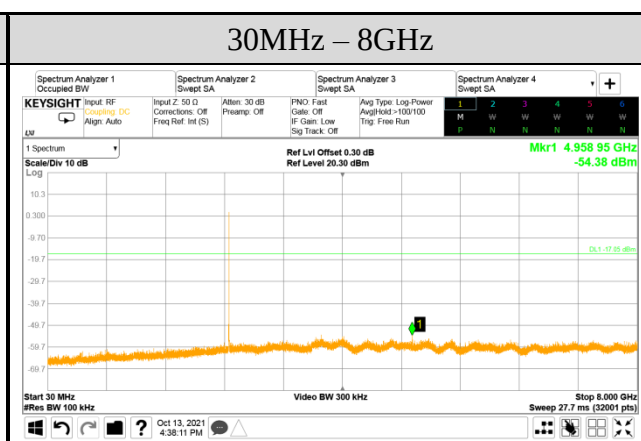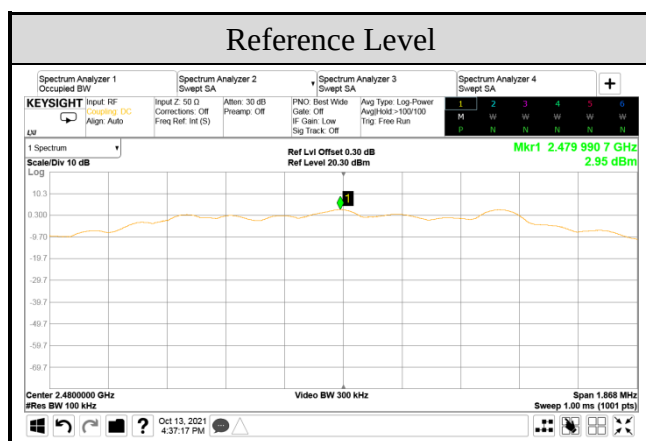

7. 功率密度之量測

測試日期	2021/10/13	環境溫/濕度	24°C/58%
測試電壓	DC 3.85V (經鋰電池供電)	電纜損失	0.30dB
		測試人員	Martin Chen

7.1. 功率密度

模式	測試頻率 (MHz)	功率密度 (dBm)	限制值 (dBm)
BLE	2402	2.59	<8dBm/3kHz
	2440	2.97	
	2480	2.95	

BLE 模式測試結果係依照 FCC 公告之 KDB558074 D01 v05r02，且解析頻寬以 100kHz 量測其測試結果較 3kHz 嚴格

7.2. 功率密度之量測圖

