Band 1, ANT B

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH38

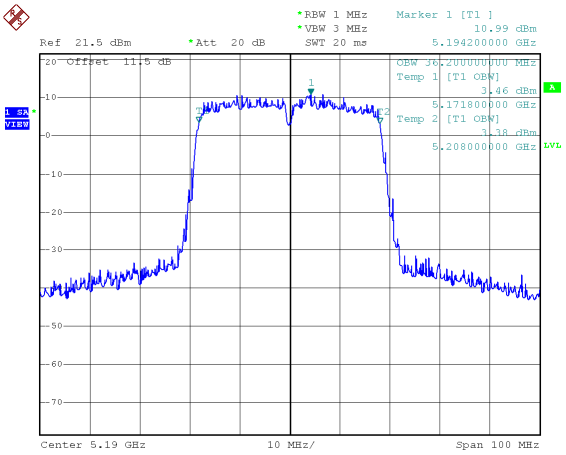

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH42

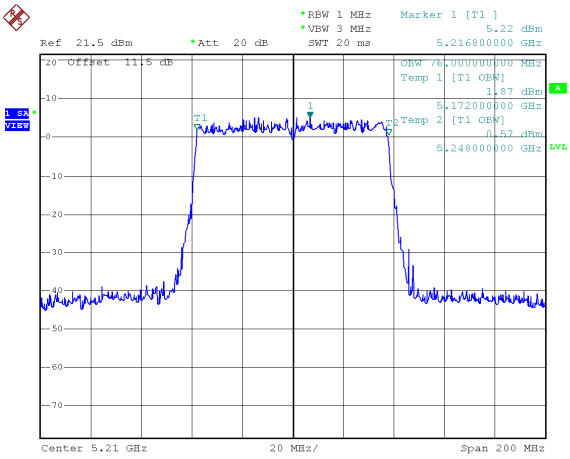

CH46

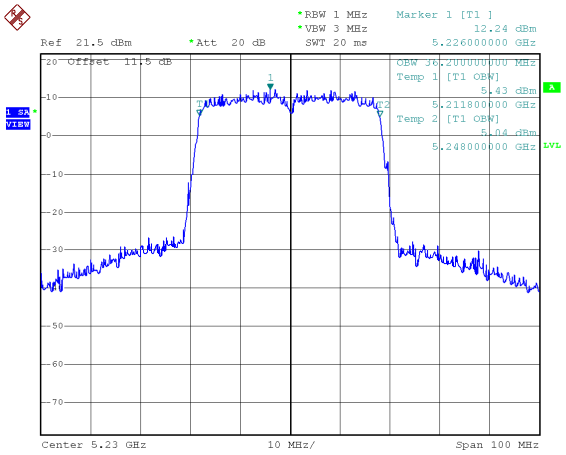

Band 2, ANT A
Modulation Standard: 802.11a (6Mbps)
CH52

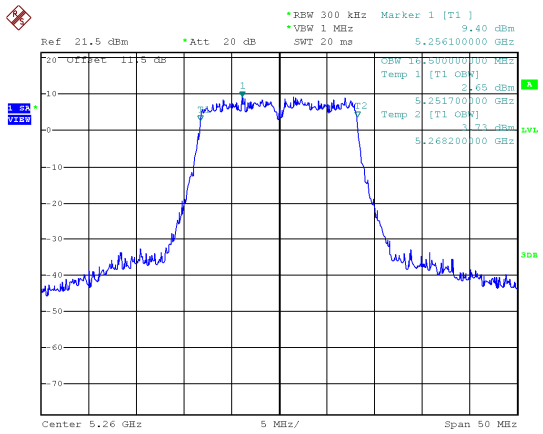

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH52

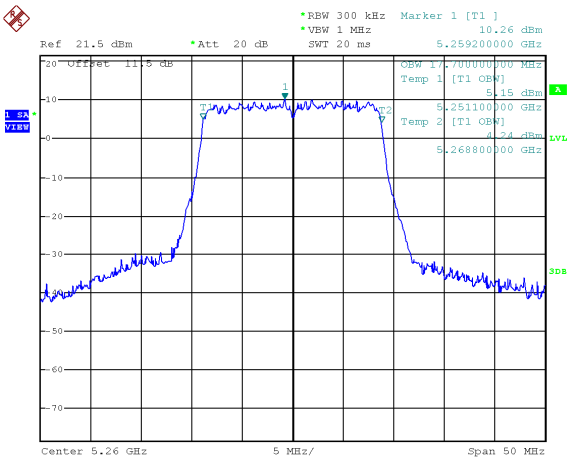

CH60

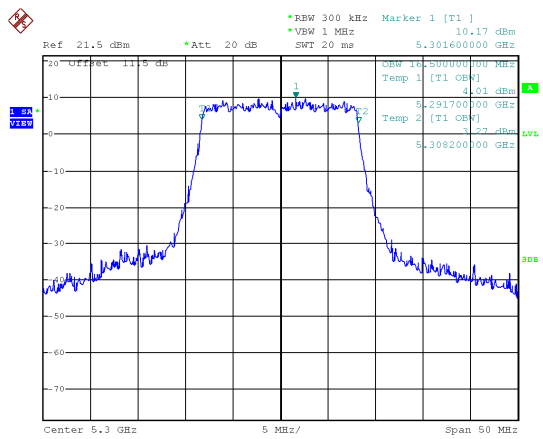

CH60

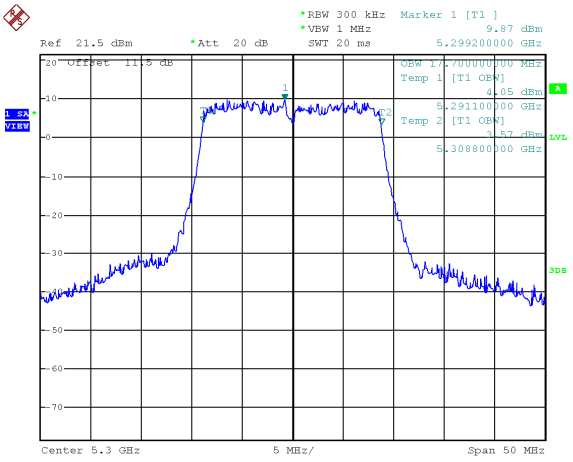

CH64

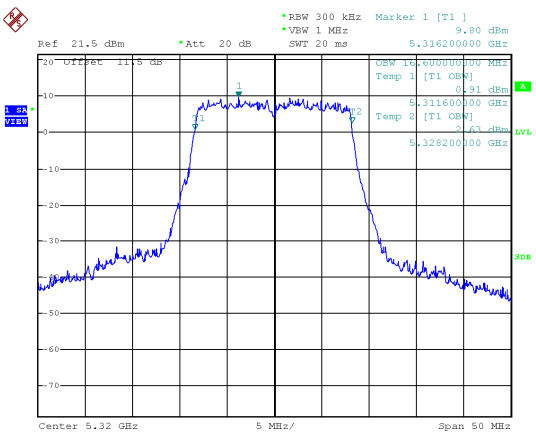

CH64

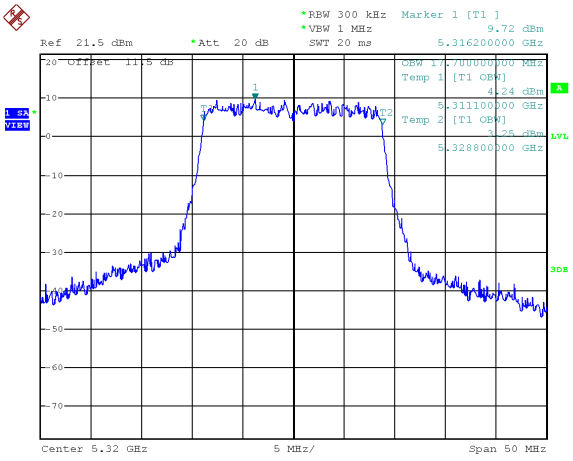

Band 2, ANT A

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH54

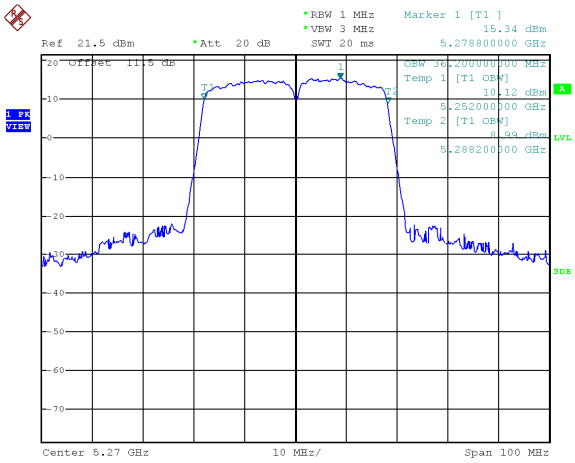

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH58

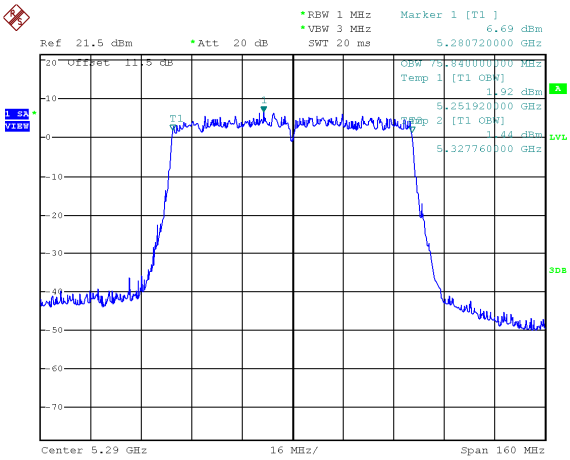

CH62

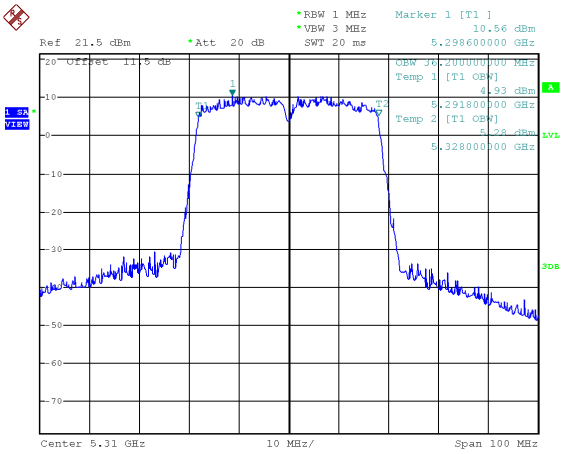

Band 2, ANT B
Modulation Standard: 802.11a (6Mbps)
CH52

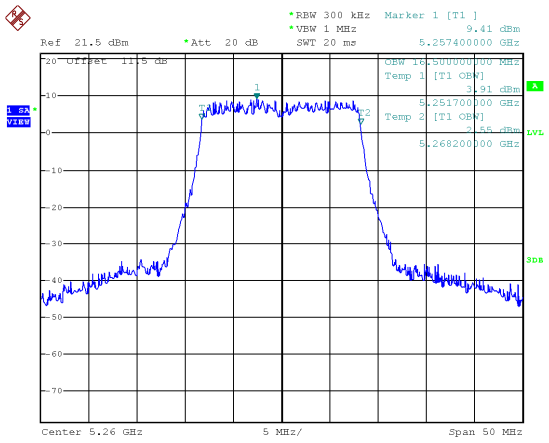

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH52

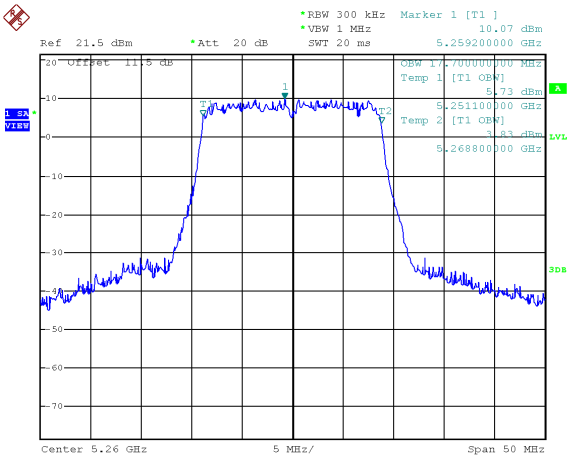

CH60

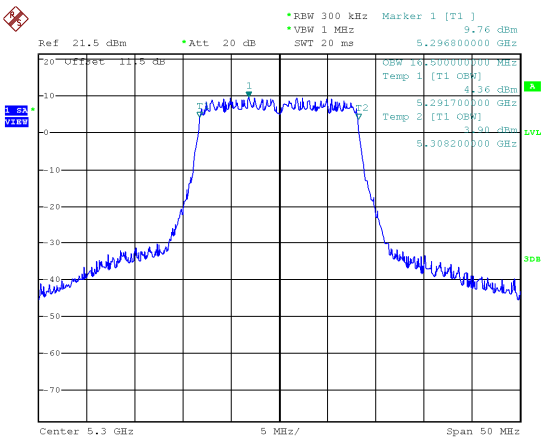

CH60

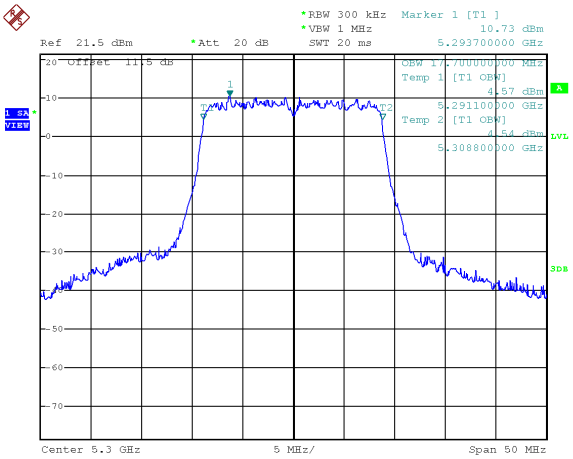

CH64

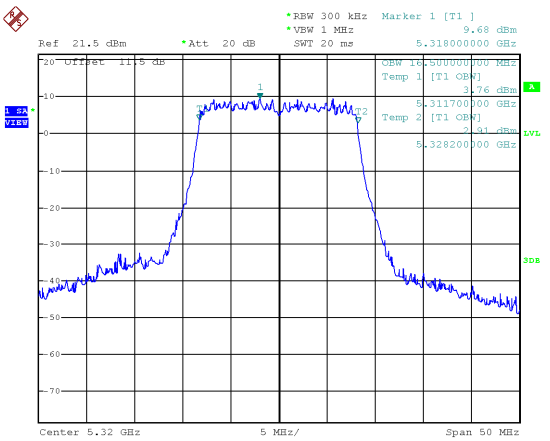

CH64

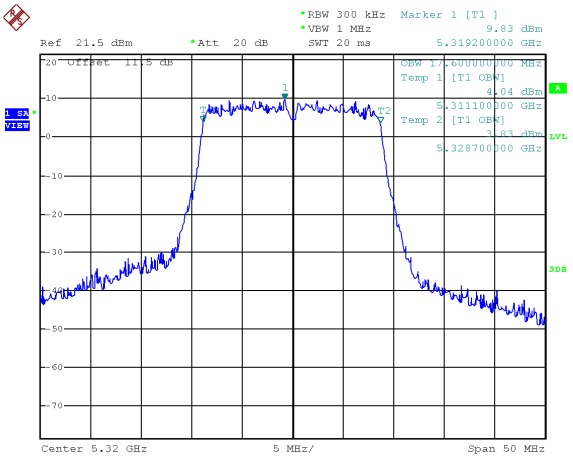

Band 2, ANT B

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH54

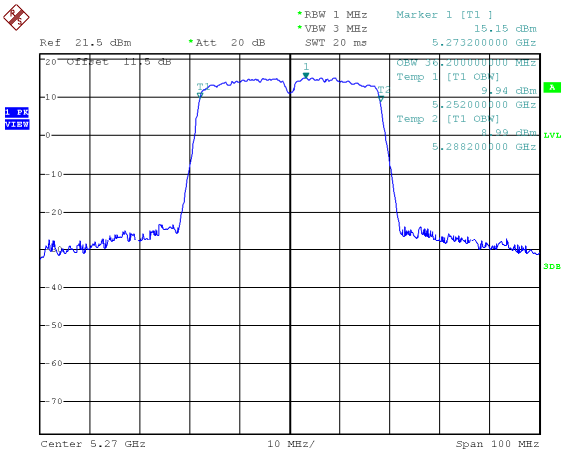

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH58

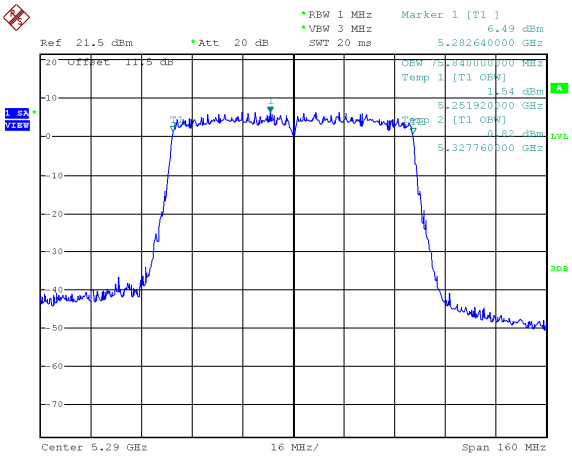

CH62

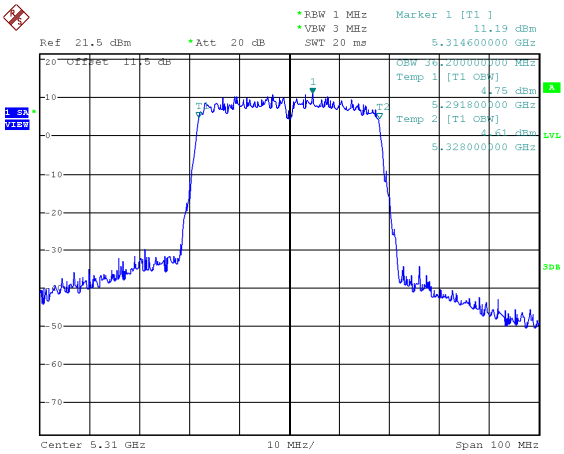

Band 3, ANT A
Modulation Standard: 802.11a (6Mbps)
CH100

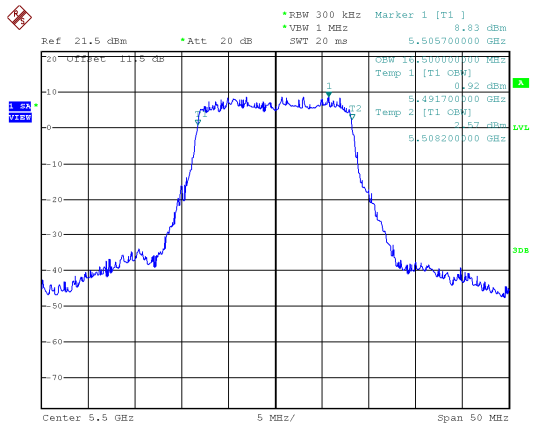

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH100

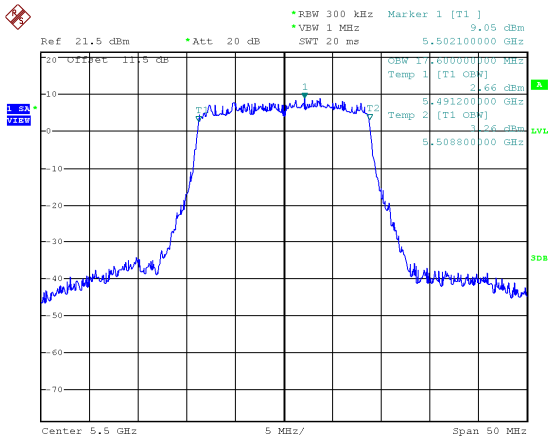

CH116

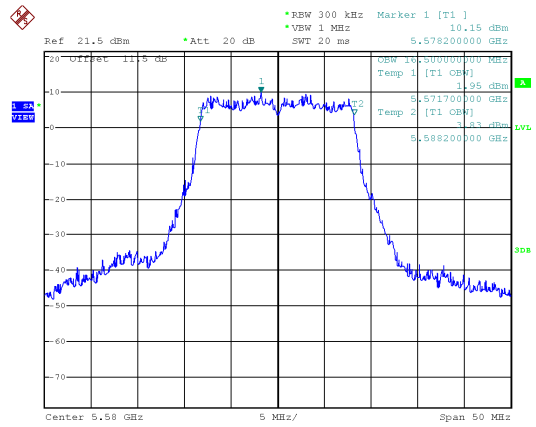

CH116

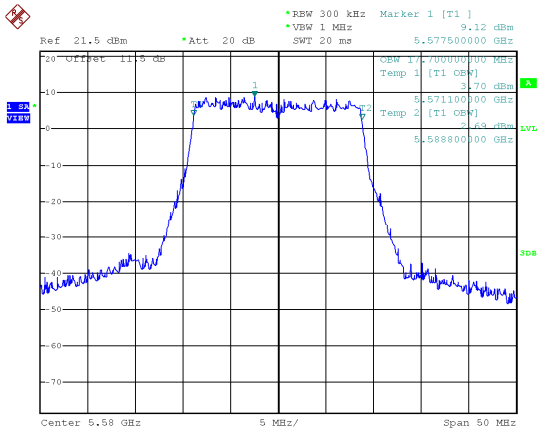

CH140

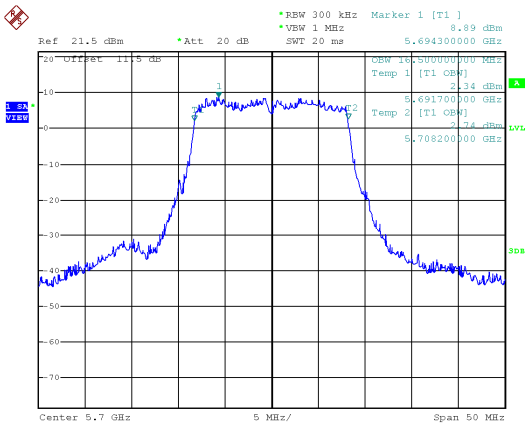

CH140

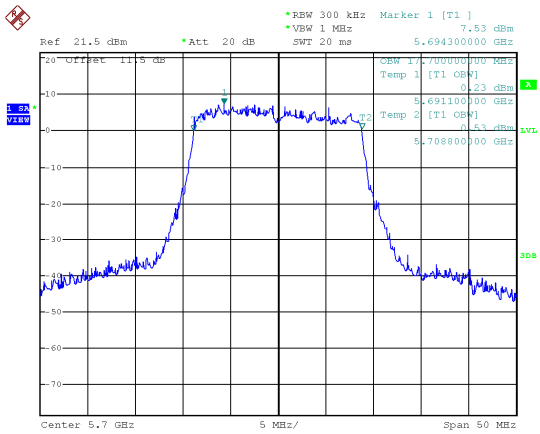

Band 3, ANT A

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH102

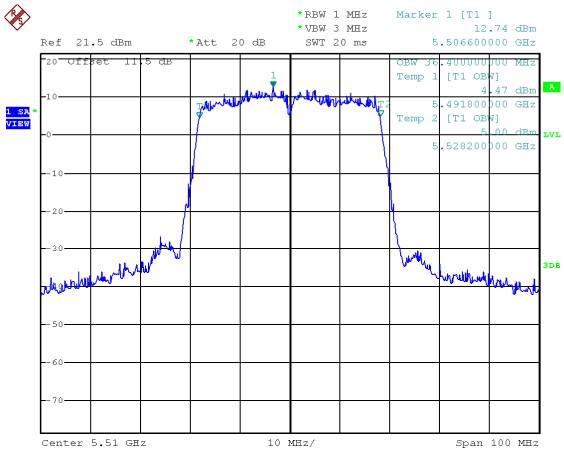

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH106

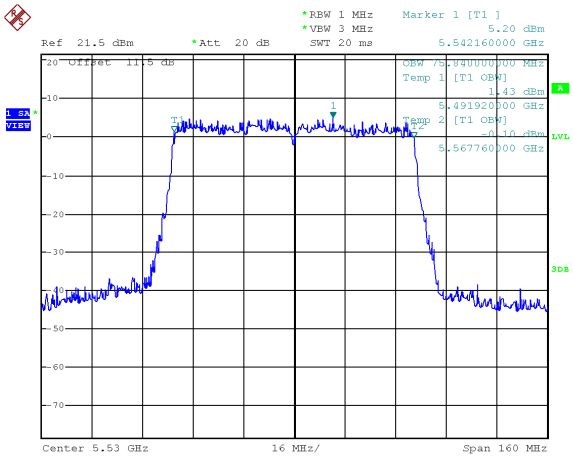

CH110

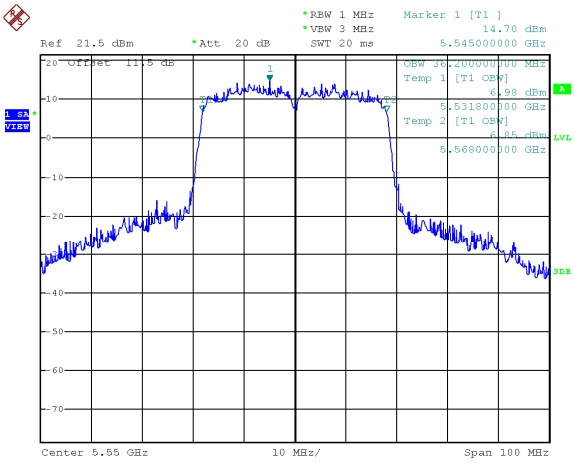

CH134

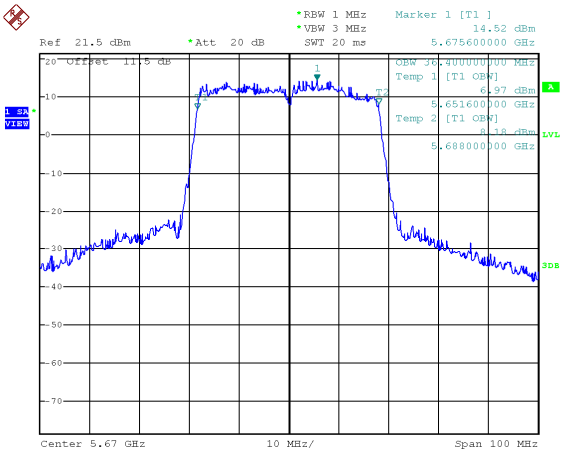

Band 3, ANT B
Modulation Standard: 802.11a (6Mbps)
CH100

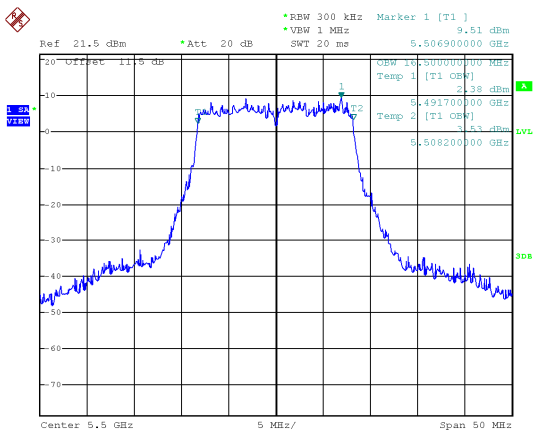

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH100

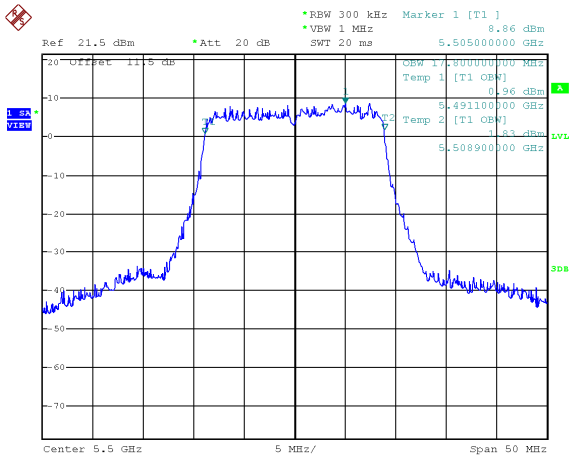

CH116

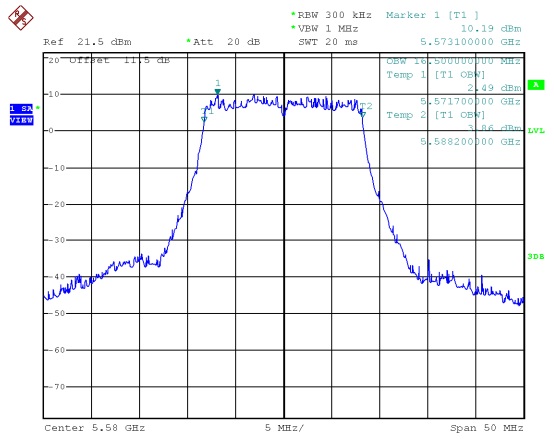

CH116

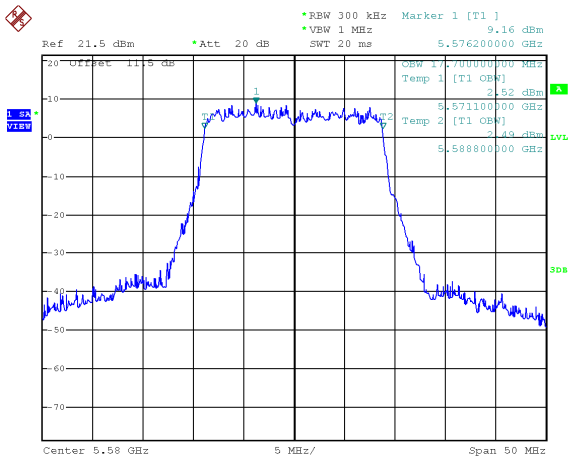

CH140

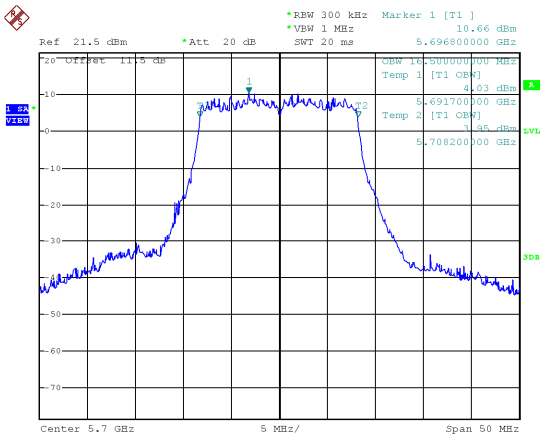

CH140

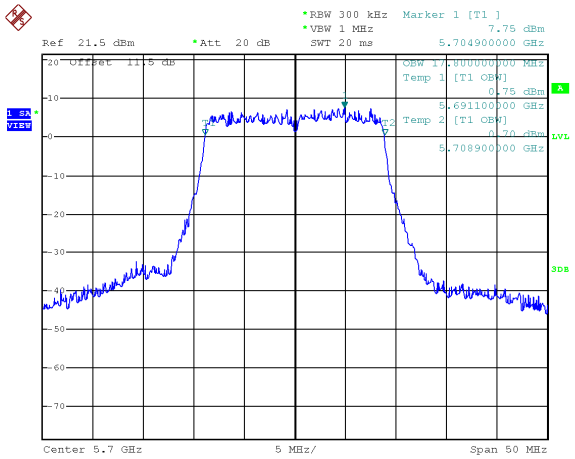

Band 3, ANT B

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH102

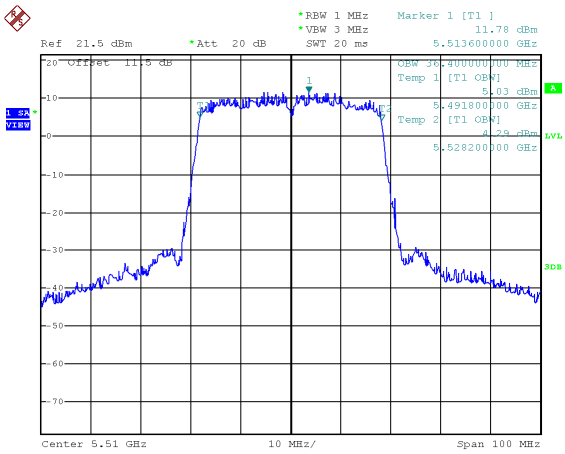

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH106

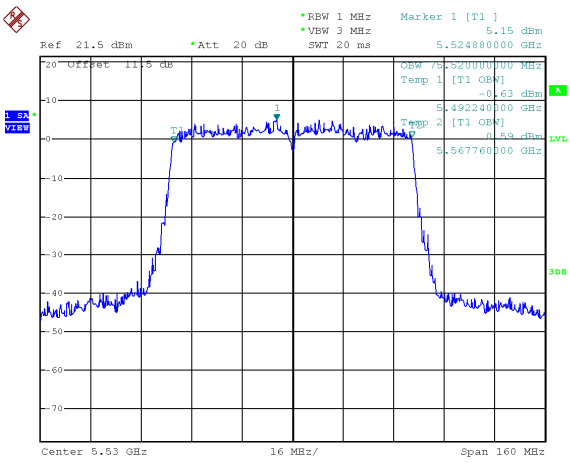

CH110

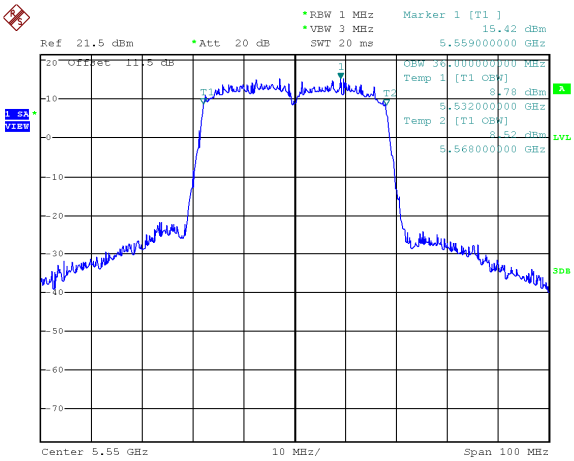

CH134

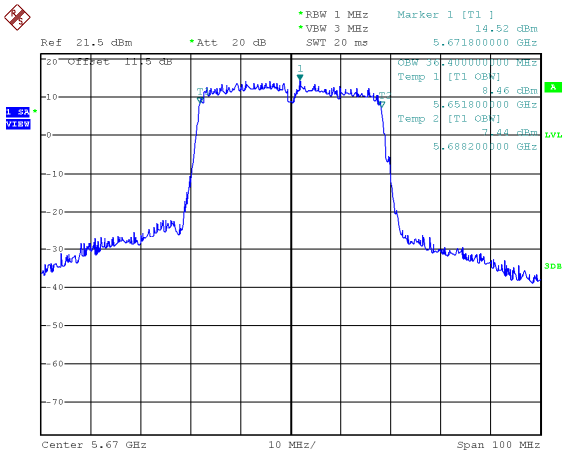

Within 5470-5725MHz Band, Straddle Channel, ANT A

Modulation Standard: 802.11a (6Mbps)
CH144

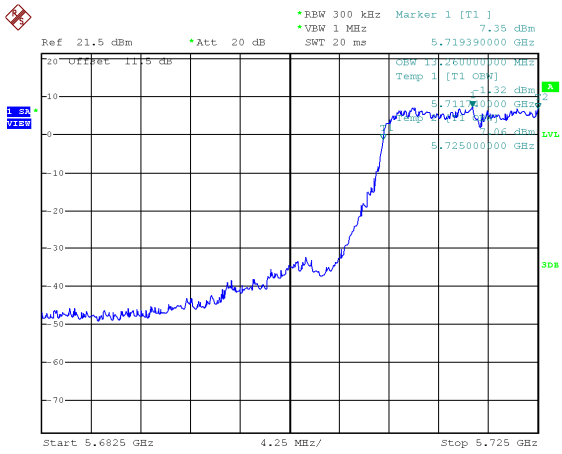

Modulation Standard: 802.11ac VHT80 (29.3Mbps)
CH138

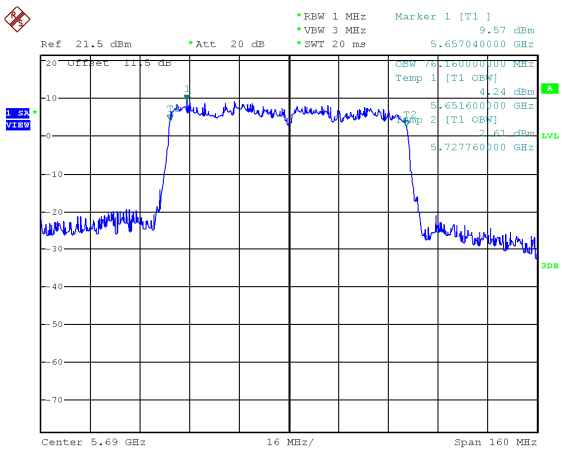

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH144

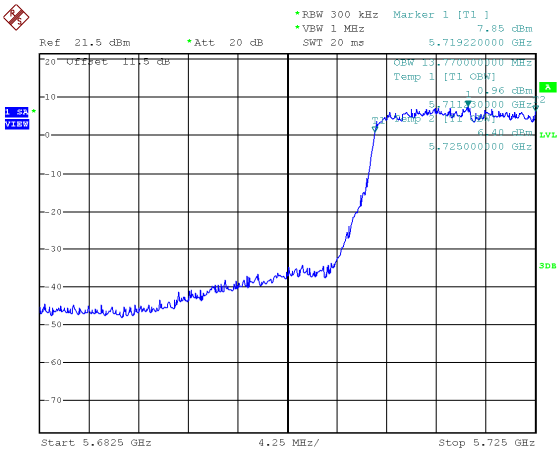

Modulation Standard: 802.11ac VHT40 (13.5Mbps)
CH142

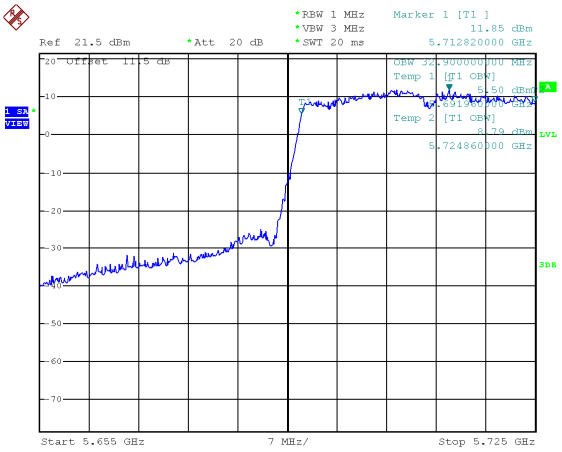

Within 5470-5725MHz Band, Straddle Channel, ANT B

Modulation Standard: 802.11a (6Mbps)
CH144

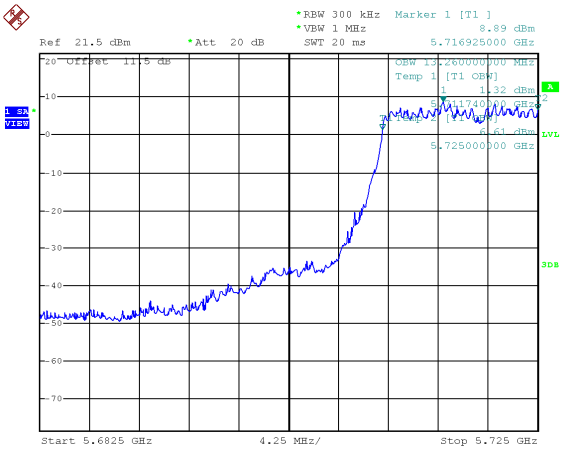

Modulation Standard: 802.11ac VHT80 (29.3Mbps)
CH138

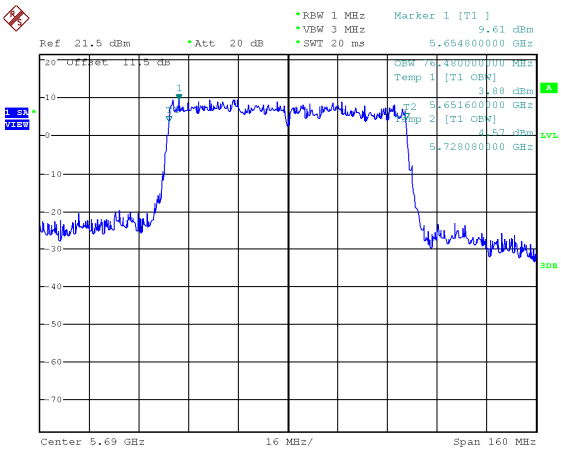

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH144

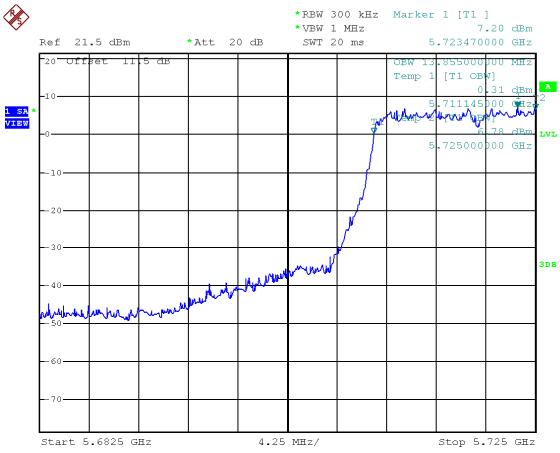

Modulation Standard: 802.11ac VHT40 (13.5Mbps)
CH142

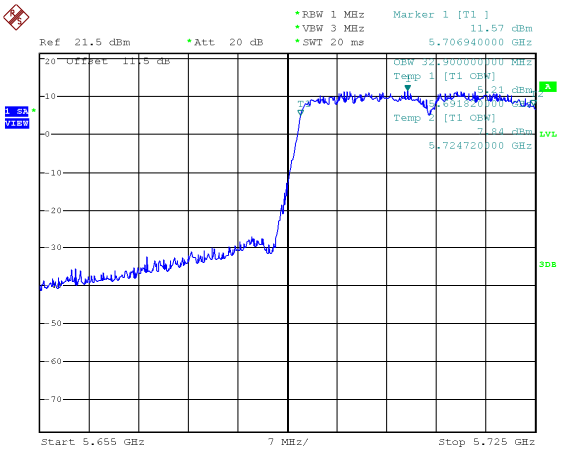

Extends across 5725MHz Band, Straddle Channel, ANT A

Modulation Standard: 802.11a (6Mbps)
CH144

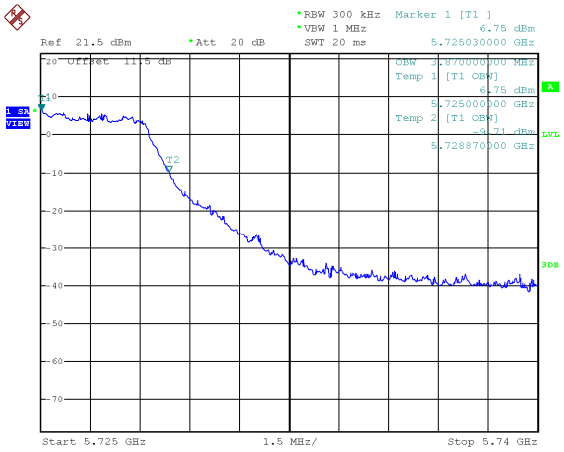

Modulation Standard: 802.11ac VHT80 (29.3Mbps)
CH138

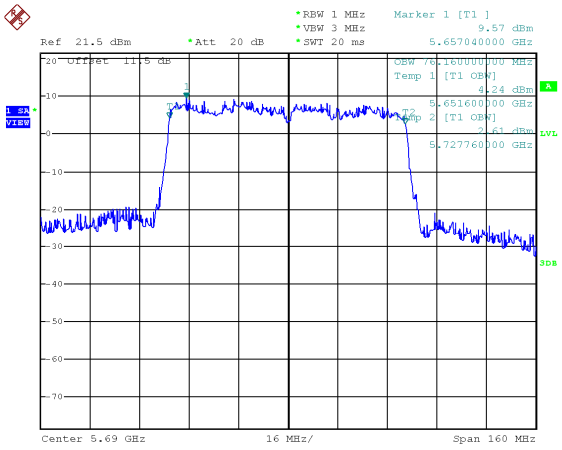

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH144

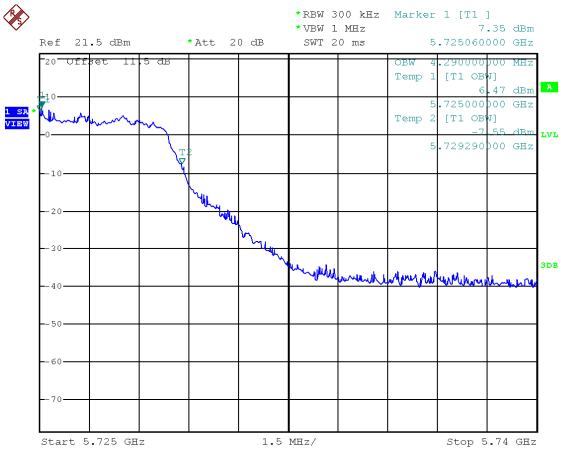

Modulation Standard: 802.11ac VHT40 (13.5Mbps)
CH142

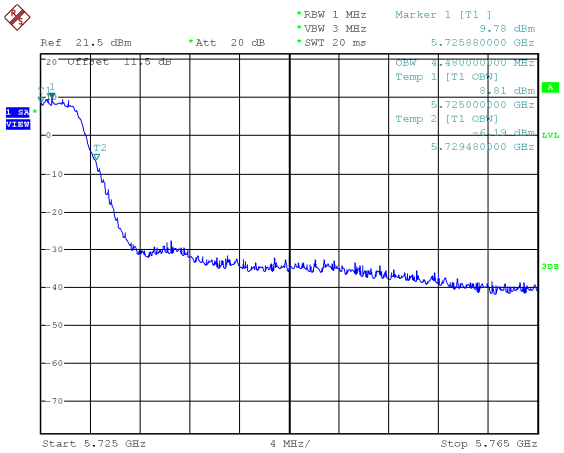

Extends across 5725MHz Band, Straddle Channel, ANT B

Modulation Standard: 802.11a (6Mbps)
CH144

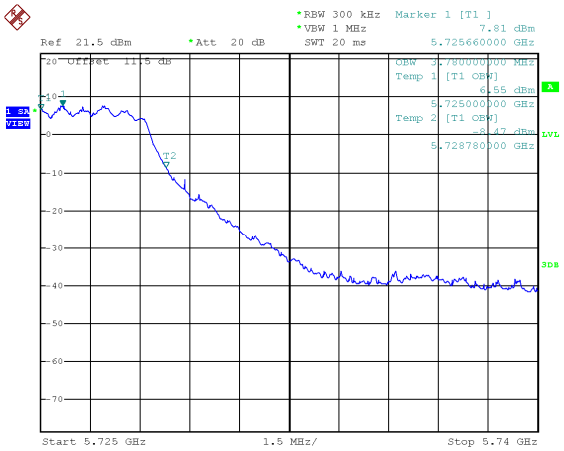

Modulation Standard: 802.11ac VHT80 (29.3Mbps)
CH138

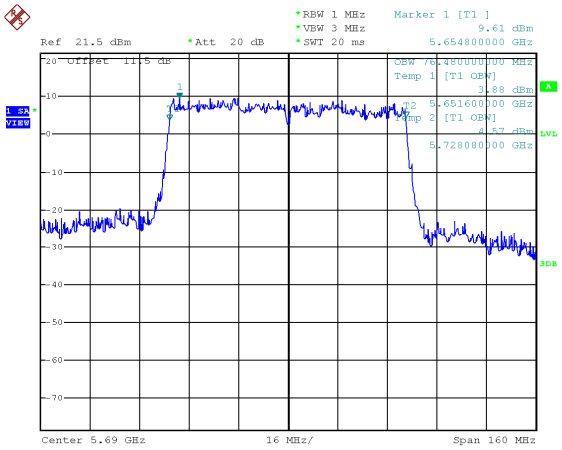

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH144

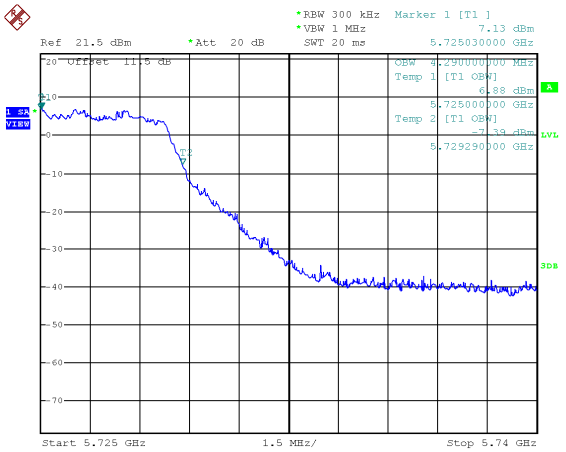

Modulation Standard: 802.11ac VHT40 (13.5Mbps)
CH142

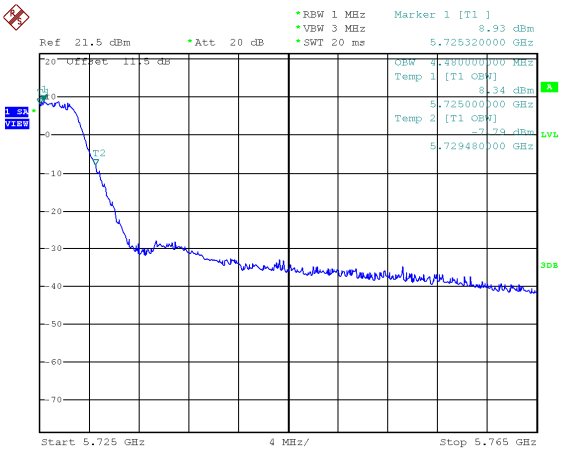

9. 傳導輸出功率

9.1. 適用標準

依照國家通訊傳播委員會低功率射頻電機技術規範(4.7.3)節功率限制規定如下:

操作於 5.15G-5.25G 頻段者	
☐	供戶外操作使用：最大傳導輸出功率應小於 1W。
☒	供室內操作使用：最大傳導輸出功率應小於 1W。
☐	供固定式點對點操作使用：最大傳導輸出功率應小於 1W。
☐	供用戶端裝置(Client Device)操作使用：最大傳導輸出功率應小於 250mW。
操作於 5.25G-5.35G 與 5.470G-5.725G 頻段者 最大傳導輸出功率應小於 250mW 或 11dBm+10logB(B 是 26dB 發射頻寬，單位 MHz)之較小者。	
操作於 5.725G-5.850G 頻段者 最大傳導輸出功率應小於 1W。	

9.2. 測試方法

The transmitter output is connected to a power meter.
Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

9.3. 測試配置



9.4. 測試結果及數據

Temperature: 21°C Humidity: 64%

Test Date: Feb. 08, 2018 Test Mode: Non-Beamforming

In the 5.2GHz Band

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)		Total Power (dBm)	Total Power (mW)	Power Limit (dBm)
			ANT A	ANT B			
802.11a	36	5180	18.76	18.73	21.76	149.81	30.00
	44	5220	19.95	19.93	22.95	197.26	30.00
	48	5240	18.96	19.23	22.11	162.46	30.00
802.11an HT20	36	5180	18.71	18.62	21.68	147.08	30.00
	44	5220	19.82	19.88	22.86	193.21	30.00
	48	5240	18.75	19.03	21.90	154.97	30.00
802.11an HT40	38	5190	17.71	17.79	20.76	119.14	30.00
	46	5230	19.01	19.03	22.03	159.60	30.00
802.11ac VHT20	36	5180	18.74	18.66	21.71	148.27	30.00
	44	5220	19.86	19.98	22.93	196.37	30.00
	48	5240	18.83	19.12	21.99	158.04	30.00
802.11ac VHT40	38	5190	14.53	14.15	17.35	54.381	30.00
	46	5230	19.07	19.11	22.10	162.19	30.00
802.11ac VHT80	42	5210	13.44	13.22	16.34	43.069	30.00

Temperature: 22°C Humidity: 64%

Test Date: Jun. 10, 2018 Test Mode: Non-Beamforming

In the 5.3GHz Band

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)		Total Power (dBm)	Total Power (mW)	Power Limit (dBm)
			ANT A	ANT B			
802.11a	52	5260	17.95	17.21	20.61	114.98	24.00
	60	5300	18.01	16.98	20.54	113.13	24.00
	64	5320	17.71	17.22	20.48	111.74	24.00
802.11an HT20	52	5260	18.27	17.66	20.99	125.49	24.00
	60	5300	18.48	17.57	21.06	127.62	24.00
	64	5320	18.01	17.69	20.86	121.99	24.00
802.11an HT40	54	5270	20.67	19.91	23.32	214.63	24.00
	62	5310	16.64	15.58	19.15	82.27	24.00
802.11ac VHT20	52	5260	18.29	17.69	21.01	126.20	24.00
	60	5300	18.5	17.61	21.09	128.47	24.00
	64	5320	18.03	17.72	20.89	122.69	24.00
802.11ac VHT40	54	5270	20.69	19.94	23.34	215.85	24.00
	62	5310	16.66	15.6	19.17	82.65	24.00
802.11ac VHT80	58	5290	15.12	14.03	17.62	57.80	24.00

Temperature: 22°C
Humidity: 64%
Test Date: Jun. 10, 2018
Test Mode: Non-Beamforming

In the 5.5GHz Band

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)		Total Power (dBm)	Total Power (mW)	Power Limit (dBm)
			ANT A	ANT B			
802.11a	100	5500	16.22	16.31	19.28	84.64	24.00
	116	5580	16.72	16.37	19.56	90.34	24.00
	140	5700	17.07	17.21	20.15	103.53	24.00
802.11an HT20	100	5500	16.6	16.72	19.67	92.70	24.00
	116	5580	16.25	16.01	19.14	82.07	24.00
	140	5700	15.16	15.2	18.19	65.92	24.00
802.11an HT40	102	5510	17.01	16.93	19.98	99.55	24.00
	110	5550	19.46	19.72	22.60	182.06	24.00
	134	5670	19.62	19.94	22.79	190.25	24.00
802.11ac VHT20	100	5500	16.63	16.75	19.70	93.34	24.00
	116	5580	16.27	16.03	19.16	82.45	24.00
	140	5700	15.18	15.22	18.21	66.23	24.00
802.11ac VHT40	102	5510	17.04	16.95	20.01	100.13	24.00
	110	5550	19.48	19.75	22.63	183.12	24.00
	134	5670	19.65	19.97	22.82	191.57	24.00
802.11ac VHT80	106	5530	13.64	13.43	16.55	45.15	24.00

Within 5470-5725MHz Band, Straddle Channel

Modulation Type	CH	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (mW)	With duty factor Total power (dBm)	NCC Limit (dBm)
			ANT A	ANT B					
802.11a	144	5720	14.55	14.95	17.76	0.00	59.771	17.76	22.67
802.11an HT20	144	5720	13.54	14.88	17.27	0.00	53.355	17.27	22.82
802.11an HT40	142	5710	16.32	16.98	19.67	0.00	92.743	19.67	24.00
802.11ac VHT20	144	5720	13.98	15.22	17.65	0.00	58.269	17.65	22.80
802.11ac VHT40	142	5710	16.55	17.02	19.80	0.00	95.536	19.80	24.00
802.11ac VHT80	138	5690	19.50	18.71	22.13	0.22	171.919	22.35	24.00

Temperature: 22°C
Humidity: 64%
Test Date: Jun. 10, 2018
Test Mode: Non-Beamforming

Extends across 5725MHz Band, Straddle Channel

Modulation Type	CH	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (mW)	With duty factor Total power (dBm)	NCC Limit (dBm)
			ANT A	ANT B					
802.11a	144	5720	7.90	8.86	11.42	0.00	13.857	11.42	30.00
802.11an HT20	144	5720	9.58	8.66	12.15	0.00	16.423	12.15	30.00
802.11an HT40	142	5710	4.02	5.44	7.80	0.00	6.023	7.80	30.00
802.11ac VHT20	144	5720	9.78	8.87	12.36	0.00	17.215	12.36	30.00
802.11ac VHT40	142	5710	4.06	5.64	7.93	0.00	6.211	7.93	30.00
802.11ac VHT80	138	5690	4.10	3.39	6.77	0.22	5.000	6.99	30.00

Reference Power Meter for Straddle Channel

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)		Total Power (dBm)
			ANT A	ANT B	
802.11a	144	5720	15.99	16.35	19.18
802.11an HT20	144	5720	15.44	15.98	18.73
802.11an HT40	142	5710	17.12	17.55	20.35
802.11ac VHT20	144	5720	15.81	16.00	18.92
802.11ac VHT40	142	5710	17.43	17.82	20.64
802.11ac VHT80	138	5690	19.38	19.66	22.53

*For reference only

Temperature: 21°C Humidity: 64%

Test Date: Feb. 08, 2018 Test Mode: Non-Beamforming

In the 5.8GHzHz Band

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)		Total Power (dBm)	Total Power (mW)	Power Limit (dBm)
			ANT A	ANT B			
802.11a	149	5745	18.51	18.27	21.40	138.10	30.00
	157	5785	19.67	19.97	22.83	191.99	30.00
	165	5825	19.11	18.61	21.88	154.08	30.00
802.11an HT20	149	5745	17.91	18.15	21.04	127.11	30.00
	157	5785	19.36	19.71	22.55	179.84	30.00
	165	5825	18.48	18.99	21.75	149.72	30.00
802.11an HT40	151	5755	19.03	19.25	22.15	164.12	30.00
	159	5795	19.13	19.54	22.35	171.80	30.00
802.11ac VHT20	149	5745	17.97	18.23	21.11	129.19	30.00
	157	5785	19.44	19.78	22.62	182.96	30.00
	165	5825	18.53	19.05	21.81	151.64	30.00
802.11ac VHT40	151	5755	19.13	19.33	22.24	167.55	30.00
	159	5795	19.21	19.62	22.43	174.99	30.00
802.11ac VHT80	155	5775	18.99	19.1	22.06	160.53	30.00

Temperature: 21°C Humidity: 64%
Test Date: Feb. 08, 2018 Test Mode: Beamforming

In the 5.2GHz Band

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)		Total Power (dBm)	Total Power (mW)	Power Limit (dBm)
			ANT A	ANT B			
802.11a	36	5180	15.75	15.72	18.75	74.91	28.49
	44	5220	16.94	16.92	19.94	98.64	28.49
	48	5240	15.95	16.22	19.10	81.23	28.49
802.11an HT20	36	5180	15.7	15.61	18.67	73.55	28.49
	44	5220	16.81	16.87	19.85	96.61	28.49
	48	5240	15.74	16.02	18.89	77.49	28.49
802.11an HT40	38	5190	14.7	14.78	17.75	59.57	28.49
	46	5230	16	16.02	19.02	79.81	28.49
802.11ac VHT20	36	5180	15.73	15.65	18.70	74.14	28.49
	44	5220	16.85	16.97	19.92	98.19	28.49
	48	5240	15.82	16.11	18.98	79.03	28.49
802.11ac VHT40	38	5190	11.52	11.14	14.34	27.192	28.49
	46	5230	16.06	16.1	19.09	81.10	28.49
802.11ac VHT80	42	5210	10.43	10.21	13.33	21.536	28.49

Temperature: 22°C Humidity: 64%
Test Date: Jun. 10, 2018 Test Mode: Beamforming

In the 5.3GHz Band

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)		Total Power (dBm)	Total Power (mW)	Power Limit (dBm)
			ANT A	ANT B			
802.11a	52	5260	14.94	14.2	17.60	57.49	22.49
	60	5300	15.00	13.97	17.53	56.57	22.49
	64	5320	14.70	14.21	17.47	55.88	22.49
802.11an HT20	52	5260	15.26	14.65	17.98	62.75	22.49
	60	5300	15.47	14.56	18.05	63.81	22.49
	64	5320	15.00	14.68	17.85	61.00	22.49
802.11an HT40	54	5270	17.66	16.9	20.31	107.32	22.49
	62	5310	13.63	12.57	16.14	41.14	22.49
802.11ac VHT20	52	5260	15.28	14.68	18.00	63.11	22.49
	60	5300	15.49	14.6	18.08	64.24	22.49
	64	5320	15.02	14.71	17.88	61.35	22.49
802.11ac VHT40	54	5270	17.68	16.93	20.33	107.93	22.49
	62	5310	13.65	12.59	16.16	41.33	22.49
802.11ac VHT80	58	5290	12.11	11.02	14.61	28.90	22.49

Temperature: 22°C Humidity: 64%

Test Date: Jun. 10, 2018 Test Mode: Beamforming

In the 5.5GHz Band

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)		Total Power (dBm)	Total Power (mW)	Power Limit (dBm)
			ANT A	ANT B			
802.11a	100	5500	13.21	13.30	16.27	42.32	22.44
	116	5580	13.71	13.36	16.55	45.17	22.44
	140	5700	14.06	14.20	17.14	51.77	22.44
802.11an HT20	100	5500	13.59	13.71	16.66	46.35	22.44
	116	5580	13.24	13.00	16.13	41.04	22.44
	140	5700	12.15	12.19	15.18	32.96	22.44
802.11an HT40	102	5510	14.00	13.92	16.97	49.78	22.44
	110	5550	16.45	16.71	19.59	91.04	22.44
	134	5670	16.61	16.93	19.78	95.13	22.44
802.11ac VHT20	100	5500	13.62	13.74	16.69	46.67	22.44
	116	5580	13.26	13.02	16.15	41.23	22.44
	140	5700	12.17	12.21	15.20	33.12	22.44
802.11ac VHT40	102	5510	14.03	13.94	17.00	50.07	22.44
	110	5550	16.47	16.74	19.62	91.57	22.44
	134	5670	16.64	16.96	19.81	95.79	22.44
802.11ac VHT80	106	5530	10.63	10.42	13.54	22.58	22.44

Within 5470-5725MHz Band, Straddle Channel

Modulation Type	CH	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (mW)	With duty factor Total power (dBm)	NCC Limit (dBm)
			ANT A	ANT B					
802.11a	144	5720	11.54	11.94	14.75	0.00	29.888	14.75	22.44
802.11an HT20	144	5720	10.53	11.87	14.26	0.00	26.680	14.26	22.44
802.11an HT40	142	5710	13.31	13.97	16.66	0.00	46.375	16.66	22.44
802.11ac VHT20	144	5720	10.97	12.21	14.64	0.00	29.137	14.64	22.44
802.11ac VHT40	142	5710	13.54	14.01	16.79	0.00	47.771	16.79	22.44
802.11ac VHT80	138	5690	16.49	15.70	19.12	0.22	85.965	19.34	22.44

Temperature: 22°C Humidity: 64%

Test Date: Jun. 10, 2018 Test Mode: Beamforming

Extends across 5725MHz Band, Straddle Channel

Modulation Type	CH	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (mW)	With duty factor Total power (dBm)	NCC Limit (dBm)
			ANT A	ANT B					
802.11a	144	5720	4.89	5.85	8.41	0.00	6.929	8.41	30.00
802.11an HT20	144	5720	6.57	5.65	9.14	0.00	8.212	9.14	30.00
802.11an HT40	142	5710	1.01	2.43	4.79	0.00	3.012	4.79	30.00
802.11ac VHT20	144	5720	6.77	5.86	9.35	0.00	8.608	9.35	30.00
802.11ac VHT40	142	5710	1.05	2.63	4.92	0.00	3.106	4.92	30.00
802.11ac VHT80	138	5690	1.09	0.38	3.76	0.22	2.500	3.98	30.00

Reference Power Meter for Straddle Channel

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)		Total Power (dBm)
			ANT A	ANT B	
802.11a	144	5720	12.98	13.34	16.17
802.11an HT20	144	5720	12.43	12.97	15.72
802.11an HT40	142	5710	14.11	14.54	17.34
802.11ac VHT20	144	5720	12.8	12.99	15.91
802.11ac VHT40	142	5710	14.42	14.81	17.63
802.11ac VHT80	138	5690	16.37	16.65	19.52

*For reference only

Temperature: 21°C
Test Date: Feb. 08, 2018

Humidity: 64%
Test Mode: Beamforming

In the 5.8GHzHz Band

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)		Total Power (dBm)	Total Power (mW)	Power Limit (dBm)
			ANT A	ANT B			
802.11a	149	5745	15.5	15.26	18.39	69.06	28.44
	157	5785	16.66	16.96	19.82	96.00	28.44
	165	5825	16.1	15.6	18.87	77.05	28.44
802.11an HT20	149	5745	14.9	15.14	18.03	63.56	28.44
	157	5785	16.35	16.7	19.54	89.93	28.44
	165	5825	15.47	15.98	18.74	74.86	28.44
802.11an HT40	151	5755	16.02	16.24	19.14	82.07	28.44
	159	5795	16.12	16.53	19.34	85.90	28.44
802.11ac VHT20	149	5745	14.96	15.22	18.10	64.60	28.44
	157	5785	16.43	16.77	19.61	91.49	28.44
	165	5825	15.52	16.04	18.80	75.82	28.44
802.11ac VHT40	151	5755	16.12	16.32	19.23	83.78	28.44
	159	5795	16.2	16.61	19.42	87.50	28.44
802.11ac VHT80	155	5775	15.98	16.09	19.05	80.27	28.44

Within 5470-5725MHz Band, Straddle Channel, ANT A

Modulation Standard: 802.11a (6Mbps)
CH144

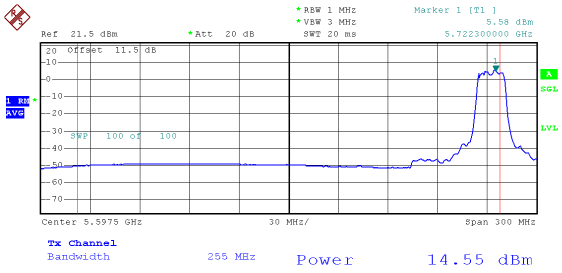

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH144

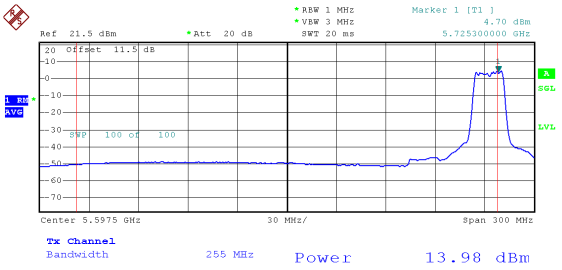

Modulation Standard: 802.11an HT20 (6.5Mbps)
CH144

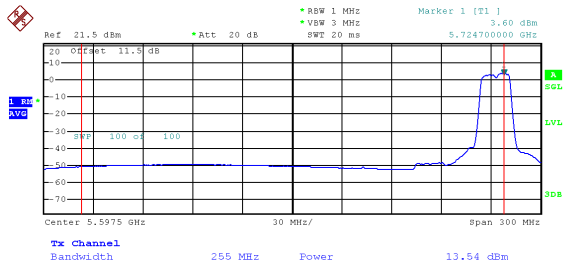

Modulation Standard: 802.11ac VHT40 (13.5Mbps)
CH142

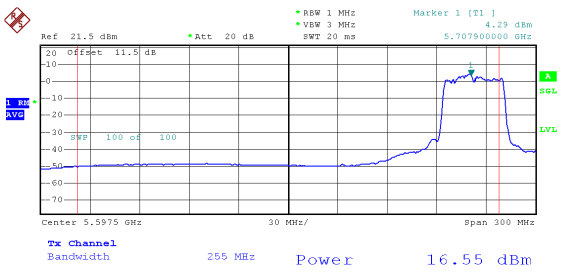

Modulation Standard: 802.11an HT40 (13.5Mbps)
CH142

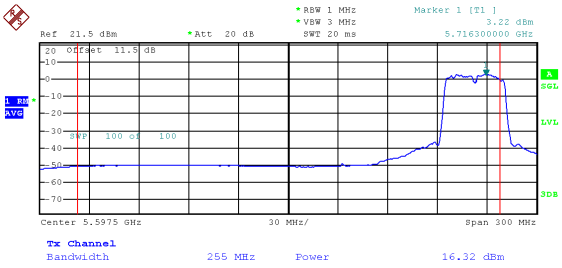

Modulation Standard: 802.11ac VHT80 (29.3Mbps)
CH138

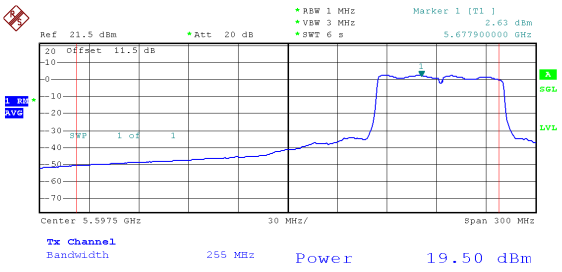

Within 5470-5725MHz Band, Straddle Channel, ANT B

Modulation Standard: 802.11a (6Bps)
CH144

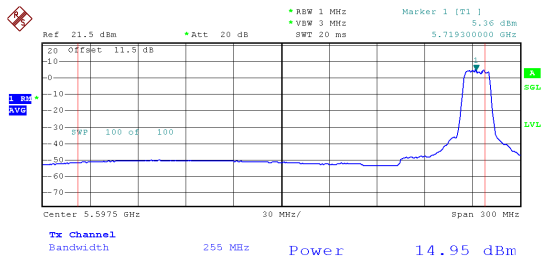

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH144

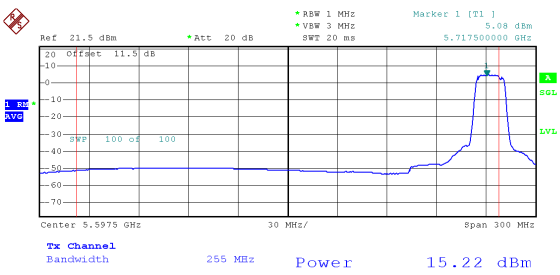

Modulation Standard: 802.11an HT20 (6.5Mbps)
CH144

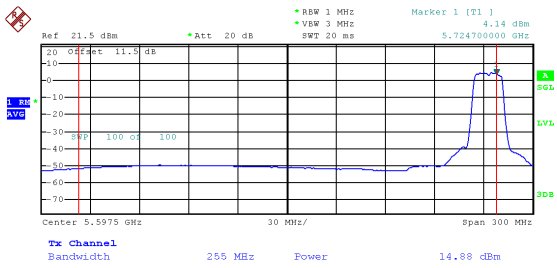

Modulation Standard: 802.11ac VHT40 (13.5Mbps)
CH142

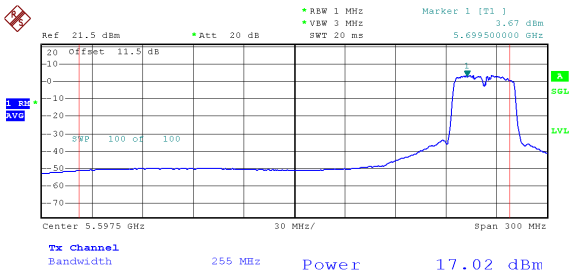

Modulation Standard: 802.11an HT40 (13.5Mbps)
CH142

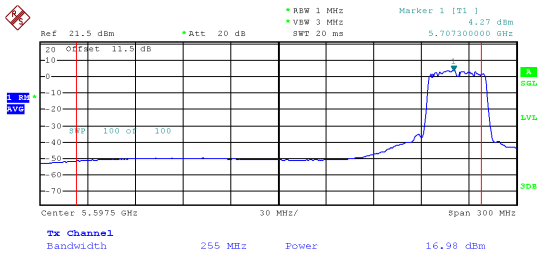

Modulation Standard: 802.11ac VHT80 (29.3Mbps)
CH138

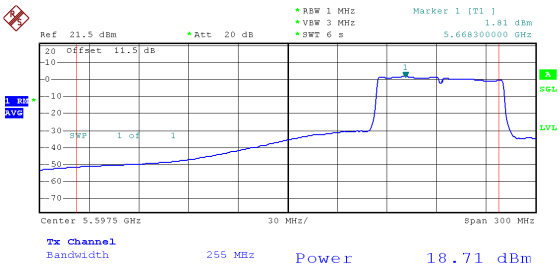

Extends across 5725MHz Band, Straddle Channel, ANT A

Modulation Standard: 802.11a (6Mbps)
CH144

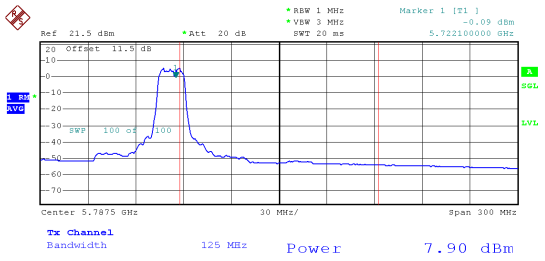

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH144

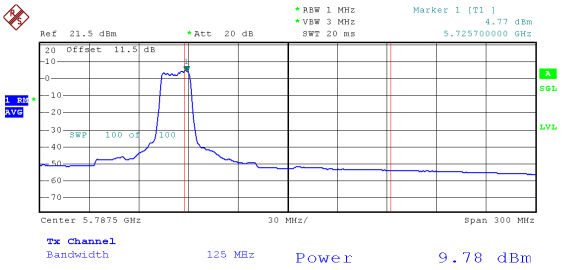

Modulation Standard: 802.11an HT20 (6.5Mbps)
CH144

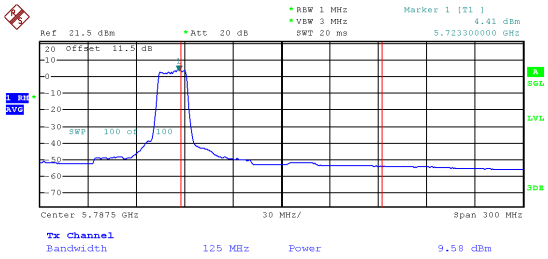

Modulation Standard: 802.11ac VHT40 (13.5Mbps)
CH142

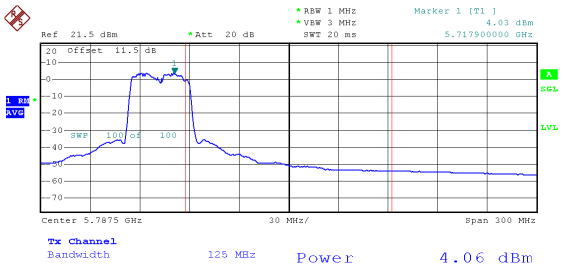

Modulation Standard: 802.11an HT40 (13.5Mbps)
CH142

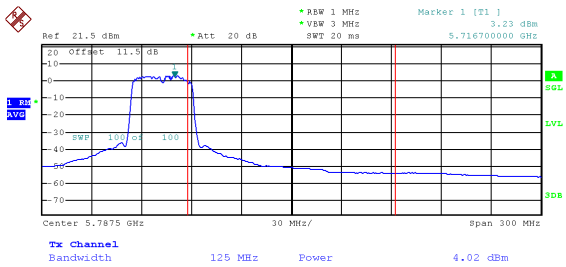

Modulation Standard: 802.11ac VHT80 (29.3Mbps)
CH138

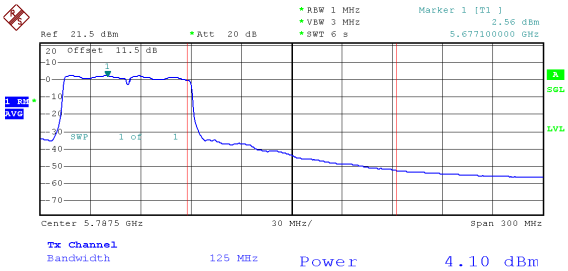

Extends across 5725MHz Band, Straddle Channel, ANT B

Modulation Standard: 802.11a (6Mbps)
CH144

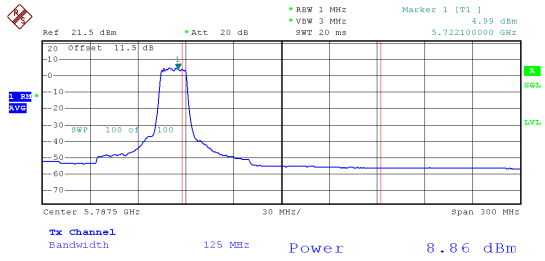

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH144

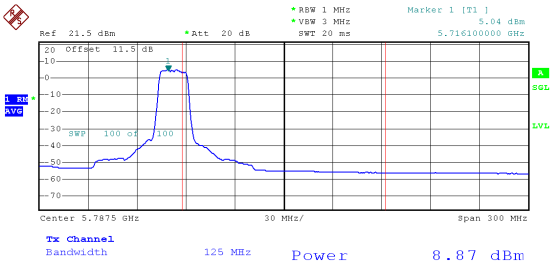

Modulation Standard: 802.11an HT20 (6.5Mbps)
CH144

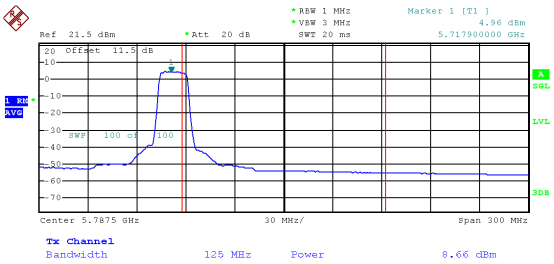

Modulation Standard: 802.11ac VHT40 (13.5Mbps)
CH142

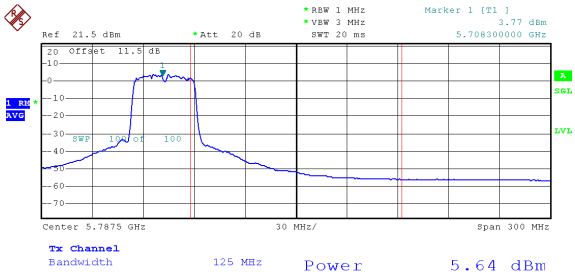

Modulation Standard: 802.11an HT40 (13.5Mbps)
CH142

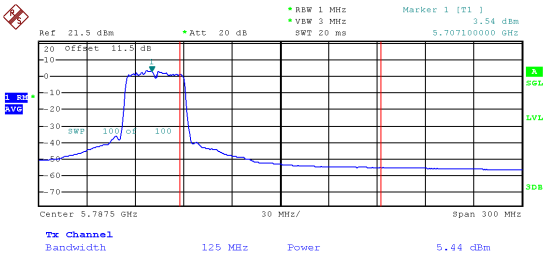

Modulation Standard: 802.11ac VHT80 (29.3Mbps)
CH138

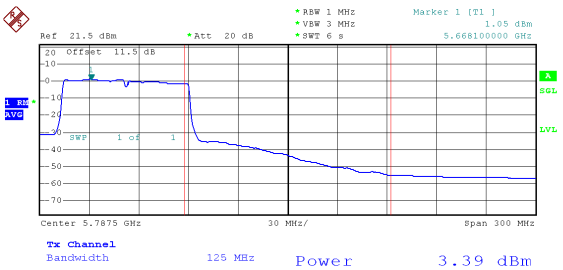

10. 最大功率頻譜密度

10.1. 適用標準

依照國家通訊傳播委員會低功率射頻電機技術規範(4.7.3)節功率限制規定如下:

操作於 5.15G-5.25G 頻段者	
☐	供戶外操作使用：在任何 1MHz 頻帶中最大功率頻譜密度應小於或等於 17dBm。
☒	供室內操作使用：在任何 1MHz 頻帶中最大功率頻譜密度應小於或等於 17dBm。
☐	供固定式點對點操作使用:在任何 1MHz 頻帶中最大功率頻譜密度應小於或等 17dBm。
☐	供用戶端裝置(Client Device)操作使用:在任何 1MHz 頻帶中最大功率頻譜密度應小於或等於 11dBm。
操作於 5.25G-5.35G 與 5.470G-5.725G 頻段者 在任何 1MHz 頻帶中最大功率頻譜密度應小於或等於 11Bm。	
操作於 5.725G-5.850G 頻段者 在任何 500KHz 頻帶中最大功率頻譜密度應小於或等於 30Bm。	

10.2.測試方法

依照KDB 789033 D02 General UNII Test Procedures New Rules測試方法如下

For 5150~5250 MHz, 5250~5350 MHz, 5470~5725 MHz	
☒	Method SA-1 1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS. 2. Trace average 100 traces. 3. Use the peak marker function to determine the maximum amplitude level.
☐	Method SA-2 Alternative 1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS. 2. Set sweep time ≥ 10 * (number of points in sweep) * (total on/off period of the transmitted signal). 3. Perform a single sweep. 4. Use the peak marker function to determine the maximum amplitude level. 5. Add 10 log(1/x), where x is the duty cycle.
For 5725~5850 MHz	
☒	Method SA-1 1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS. 2. Trace average 100 traces. 3. Use the peak marker function to determine the maximum amplitude level. 4. Add 10 log(500KHz/1000KHz)
☐	Method SA-2 Alternative 1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS. 2. Set sweep time ≥ 10 * (number of points in sweep) * (total on/off period of the transmitted signal). 3. Perform a single sweep. 4. Use the peak marker function to determine the maximum amplitude level. 5. Add 10 log(1/x), where x is the duty cycle 6. Add 10 log(500KHz/1000KHz)

10.3.測試配置



10.4. 測試結果及數據

Temperature: 21°C Humidity: 64%

Test Date: Feb. 08, 2018

In the 5.2GHz Band

Modulation Type	CH	Freq. (MHz)	Meas PSD (dBm/MHz)		Sum chain (dBm)	Duty Cycle CF(dB)	Total Corr'd PSD (dBm/MHz)	PSD Limit (dBm/MHz)
			ANT A	ANT B				
802.11a	36	5180	6.87	6.86	9.88	0.00	9.88	15.49
	44	5220	8.02	7.74	10.89	0.00	10.89	15.49
	48	5240	7.12	7.16	10.15	0.00	10.15	15.49
802.11ac VHT20	36	5180	6.68	6.55	9.63	0.00	9.63	15.49
	44	5220	7.67	7.80	10.75	0.00	10.75	15.49
	48	5240	6.71	7.08	9.91	0.00	9.91	15.49
802.11ac VHT40	38	5190	0.52	-0.30	3.14	0.00	3.14	15.49
	46	5230	4.08	4.22	7.16	0.00	7.16	15.49
802.11ac VHT80	42	5210	-3.73	-4.35	-1.02	0.22	-0.80	15.49

Temperature: 22°C Humidity: 64%

Test Date: Jun. 10, 2018

In the 5.3GHz Band

Modulation Type	CH	Freq. (MHz)	Meas PSD (dBm/MHz)		Sum chain (dBm)	Duty Cycle CF(dB)	Total Corr'd PSD (dBm/MHz)	PSD Limit (dBm/MHz)
			ANT A	ANT B				
802.11a	52	5260	6.67	5.96	9.34	0.00	9.34	9.88
	60	5300	6.33	5.50	8.95	0.00	8.95	9.88
	64	5320	6.15	5.72	8.95	0.00	8.95	9.88
802.11ac VHT20	52	5260	6.50	6.23	9.38	0.00	9.38	9.88
	60	5300	6.57	5.82	9.22	0.00	9.22	9.88
	64	5320	6.00	5.90	8.96	0.00	8.96	9.88
802.11ac VHT40	54	5270	6.14	5.68	8.93	0.00	8.93	9.88
	62	5310	6.15	5.67	8.93	0.00	8.93	9.88
802.11ac VHT80	58	5290	3.25	2.33	5.82	0.22	6.04	9.88

Temperature: 22°C Humidity: 64%

Test Date: Jun. 10, 2018

In the 5.5GHz Band

Modulation Type	CH	Freq. (MHz)	Meas PSD (dBm/MHz)		Sum chain (dBm)	Duty Cycle CF(dB)	Total Corr'd PSD (dBm/MHz)	PSD Limit (dBm/MHz)
			ANT A	ANT B				
802.11a	100	5500	6.06	6.04	9.06	0.00	9.06	9.54
	116	5580	6.23	6.30	9.28	0.00	9.28	9.54
	140	5700	6.28	6.51	9.41	0.00	9.41	9.54
	144	5720	5.66	5.40	8.54	0.00	8.54	9.54
802.11ac VHT20	100	5500	6.22	6.09	9.17	0.00	9.17	9.54
	116	5580	6.06	6.16	9.12	0.00	9.12	9.54
	140	5700	5.68	6.17	8.94	0.00	8.94	9.54
	144	5720	4.81	5.06	7.95	0.00	7.95	9.54
802.11ac VHT40	102	5510	6.27	6.46	9.38	0.00	9.38	9.54
	110	5550	5.92	6.19	9.07	0.00	9.07	9.54
	134	5670	6.15	6.18	9.18	0.00	9.18	9.54
	142	5710	4.38	3.87	7.14	0.00	7.14	9.54
802.11ac VHT80	106	5530	4.04	3.17	6.64	0.22	6.86	9.54
	138	5690	2.77	2.44	5.62	0.22	5.84	9.54

Temperature: 21°C Humidity: 64%

Test Date: Feb. 08, 2018

In the 5.8GHzHz Band

Modulation Type	CH	Freq. (MHz)	Meas PSD (dBm/MHz)		Sum chain (dBm)	Duty Cycle CF(dB)	10log(500KHz/RBW) CF (dB)	Total Corr'd PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)
			ANT A	ANT B					
802.11a	149	5745	7.23	7.36	10.31	0.00	-3.01	7.30	28.44
	157	5785	8.12	8.53	11.34	0.00	-3.01	8.33	28.44
	165	5825	6.98	7.45	10.23	0.00	-3.01	7.22	28.44
802.11ac VHT20	149	5745	7.22	6.85	10.05	0.00	-3.01	7.04	28.44
	157	5785	7.99	8.21	11.11	0.00	-3.01	8.10	28.44
	165	5825	6.41	6.99	9.72	0.00	-3.01	6.71	28.44
802.11ac VHT40	155	5755	5.18	5.02	8.11	0.00	-3.01	5.10	28.44
	159	5795	4.84	4.95	7.91	0.00	-3.01	4.90	28.44
802.11ac VHT80	155	5775	1.72	1.65	4.70	0.22	-3.01	1.91	28.44

備註：繪圖資料請參考下頁。

10.5. 結果判定

高、中、低頻段的數值皆低於限制值要求，合乎標準規定。

Band 1, ANT A

Modulation Standard: 802.11a (6Mbps)

CH36

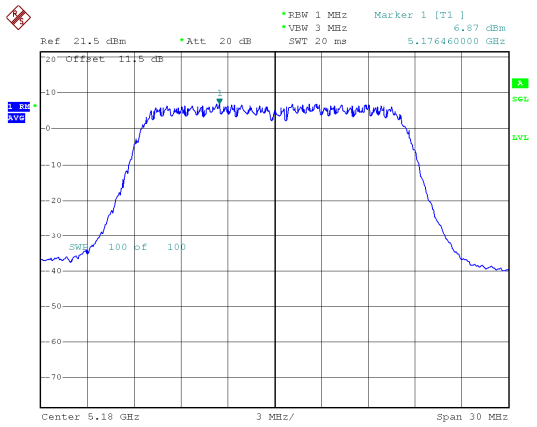

Modulation Standard: 802.11ac VHT20 (6.5Mbps)

CH36

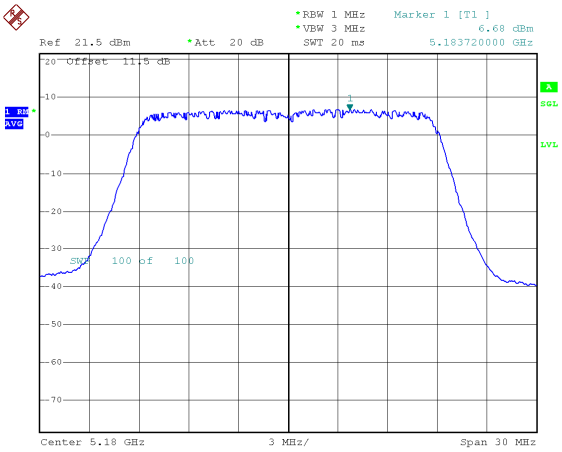

CH44

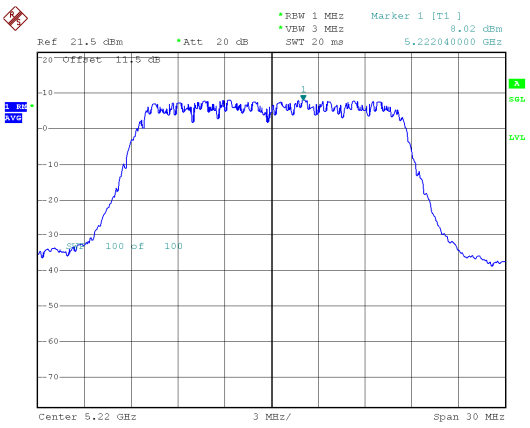

CH44

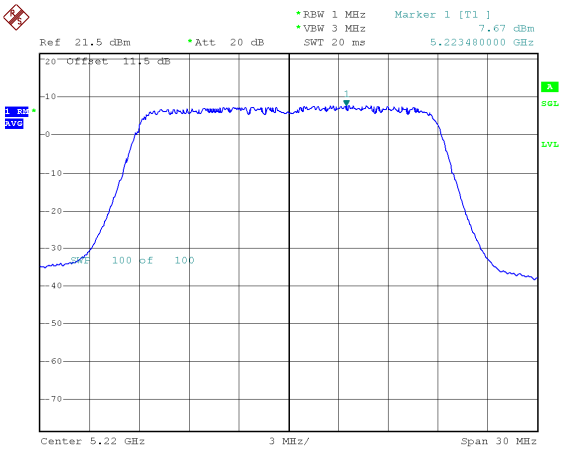

CH48

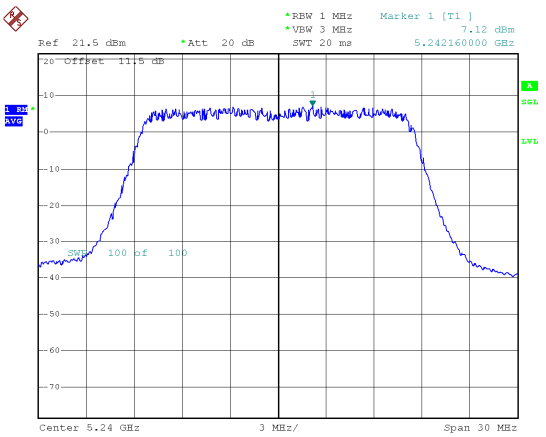

CH48

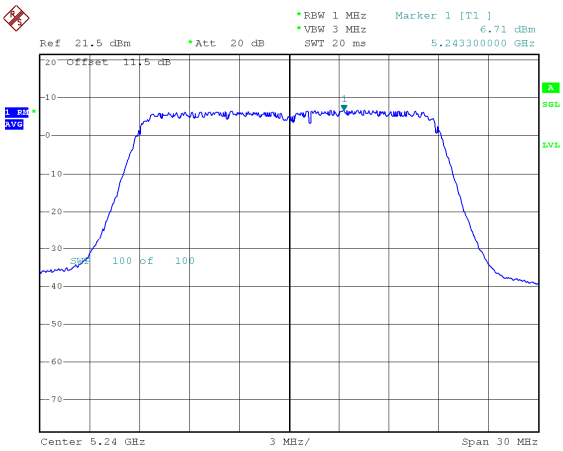

Band 1, ANT A

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH38

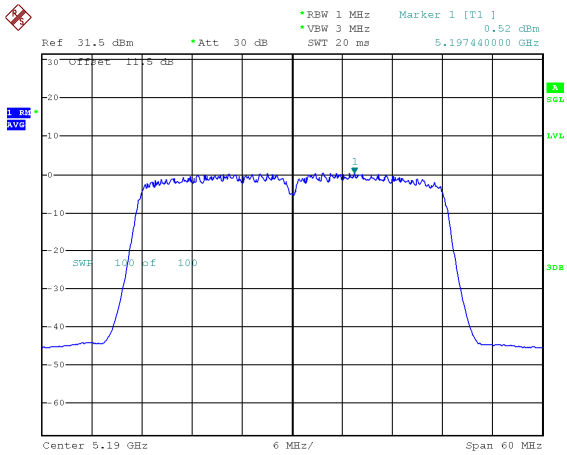

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH42

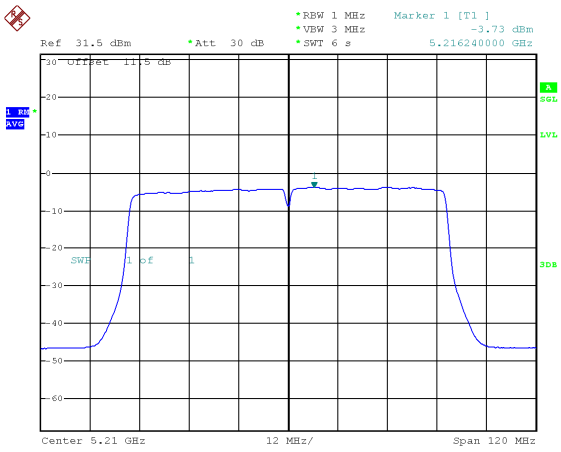

CH46

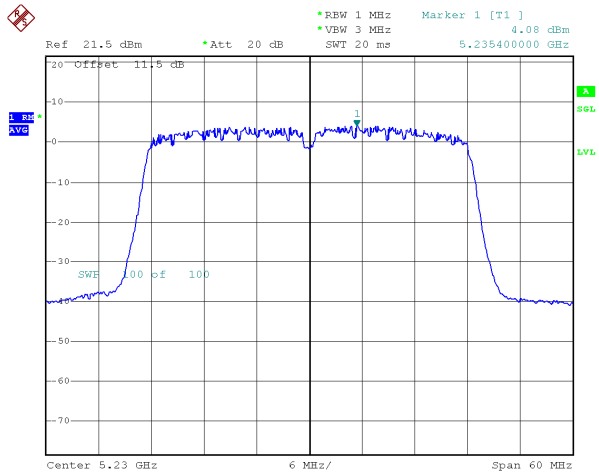

Band 1, ANT B
Modulation Standard: 802.11a (6Mbps)
CH36

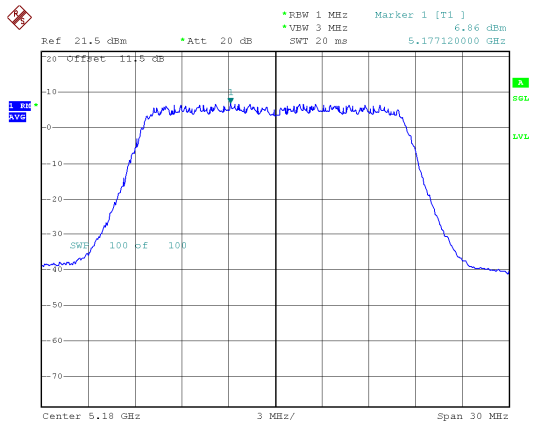

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH36

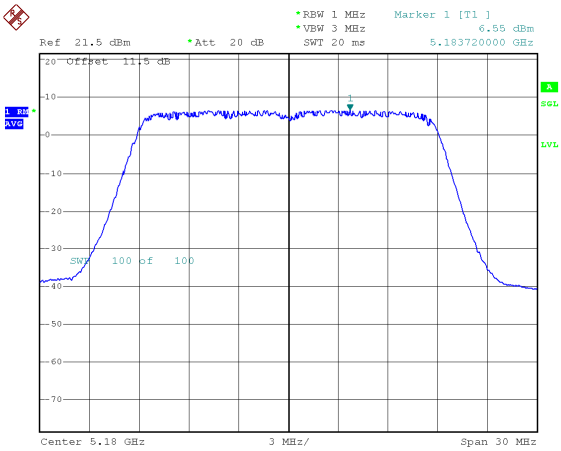

CH44

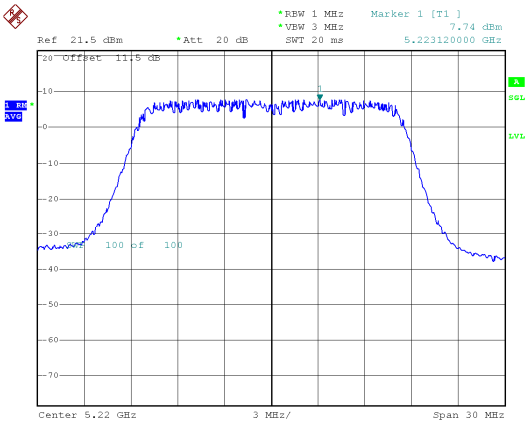

CH44

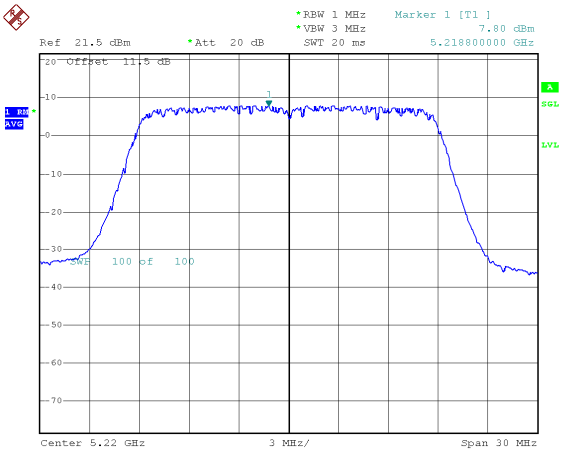

CH48

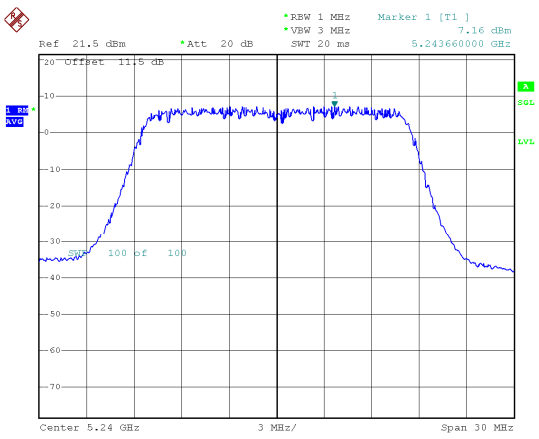

CH48

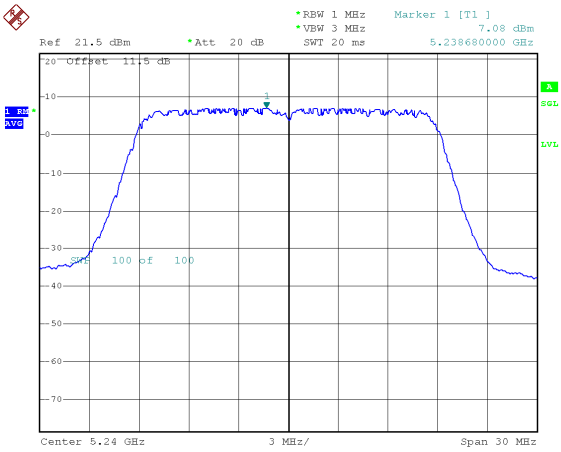

Band 1, ANT B

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH38

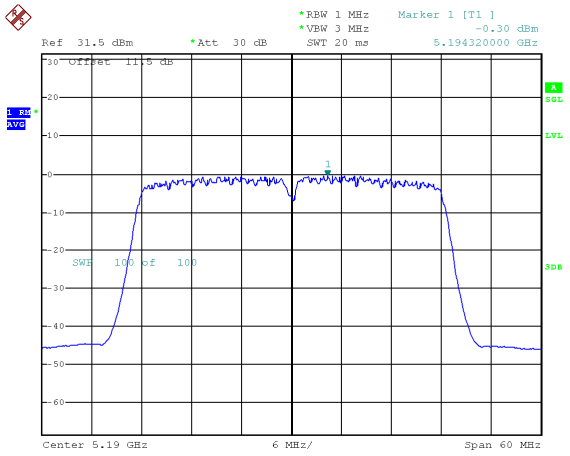

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH42

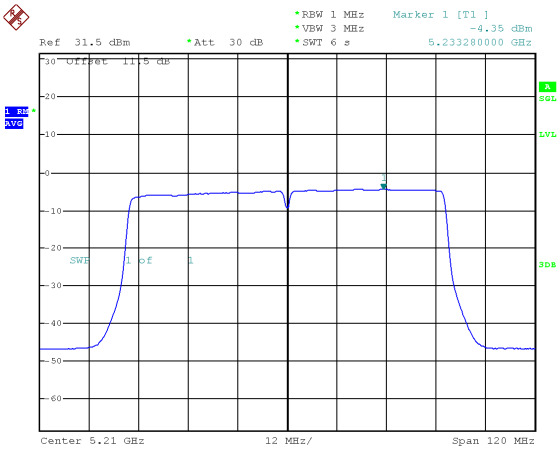

CH46

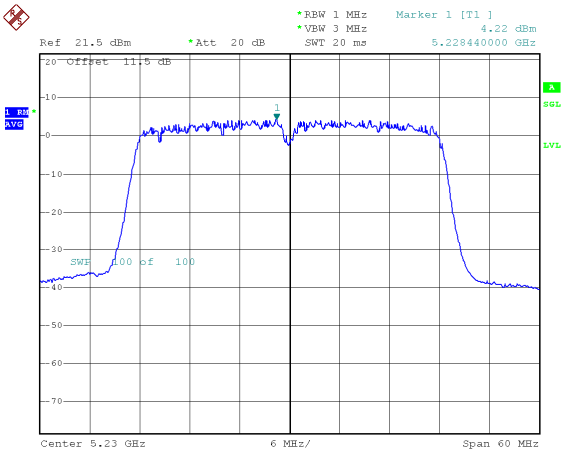

Band 2, ANT A
Modulation Standard: 802.11a (6Mbps)
CH52

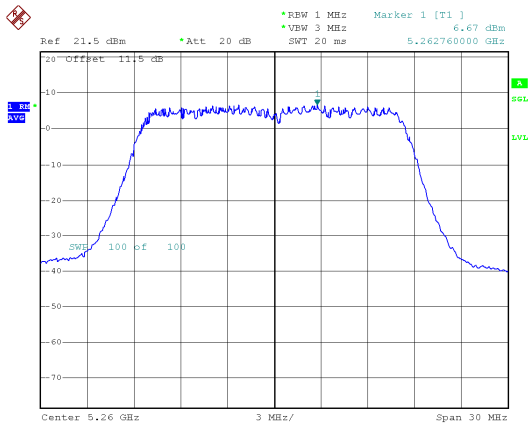

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH52

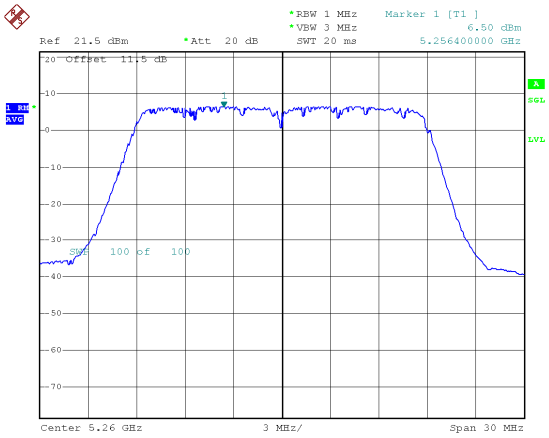

CH60

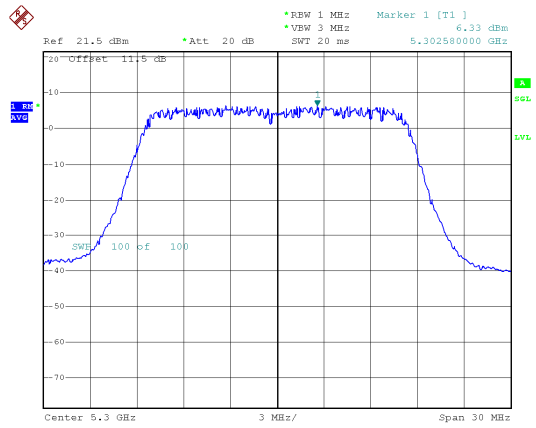

CH60

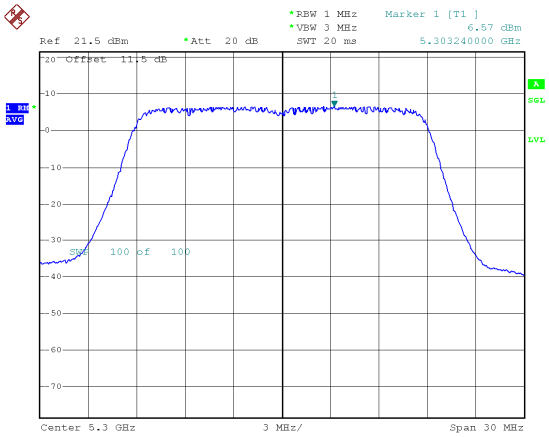

CH64

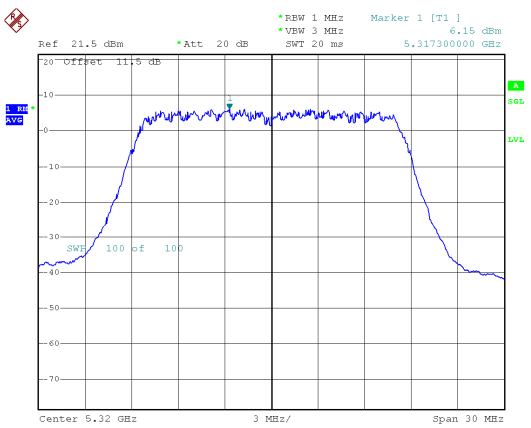

CH64

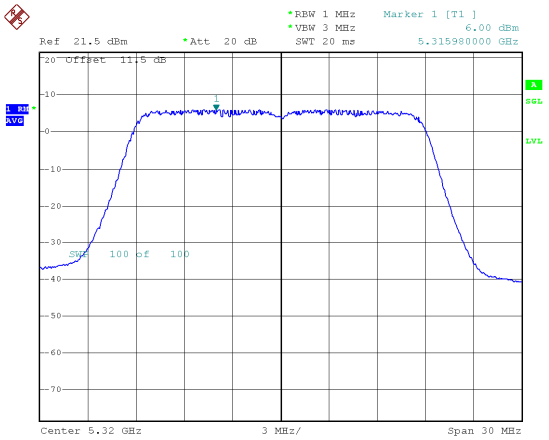

Band 2, ANT A

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH54

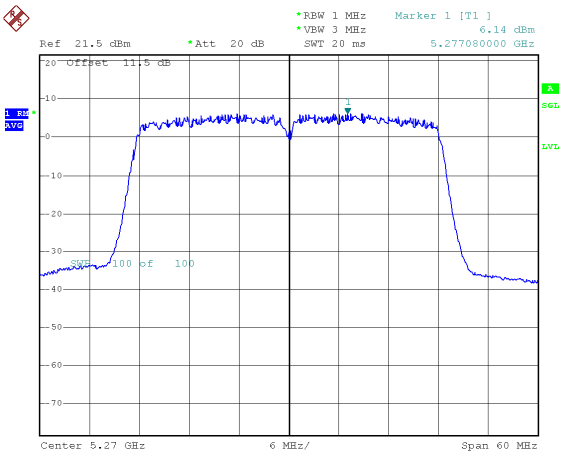

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH58

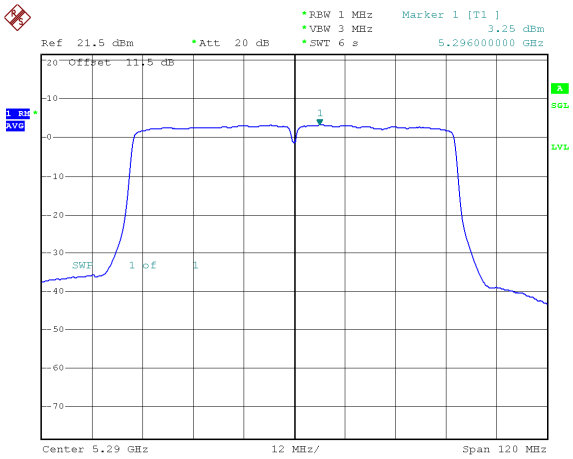

CH62

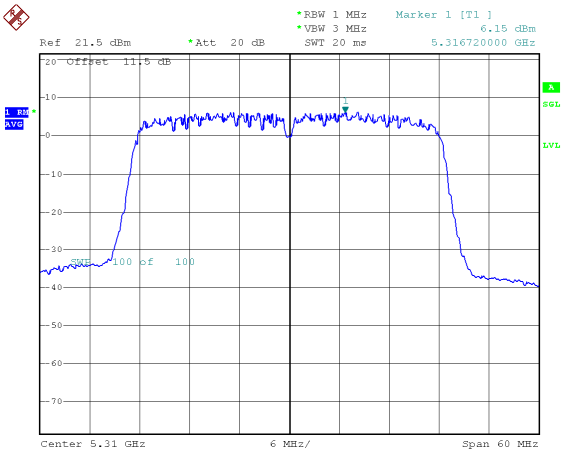

Band 2, ANT B
Modulation Standard: 802.11a (6Mbps)
CH52

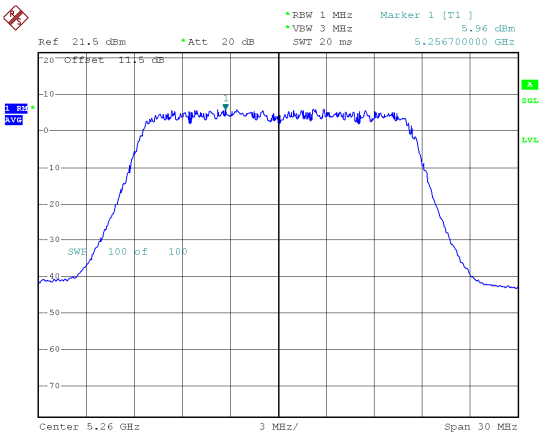

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH52

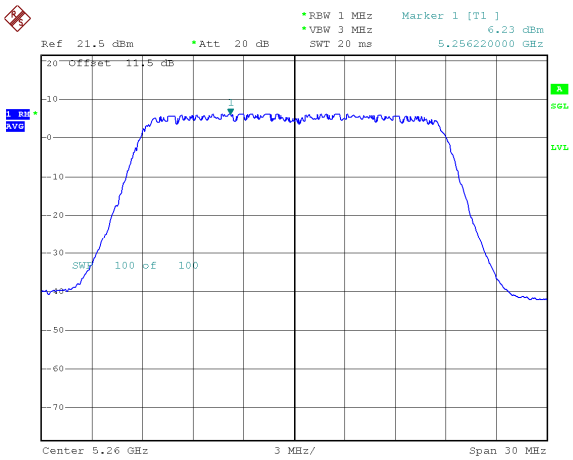

CH60

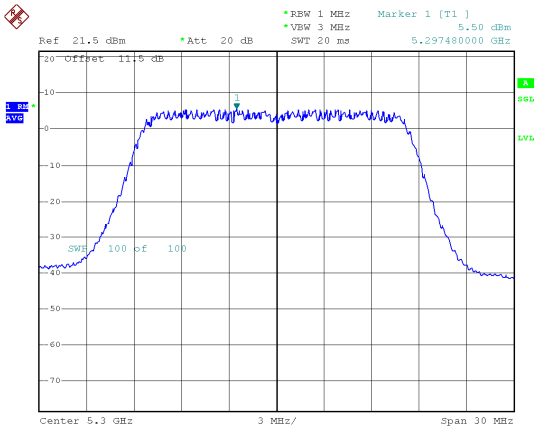

CH60

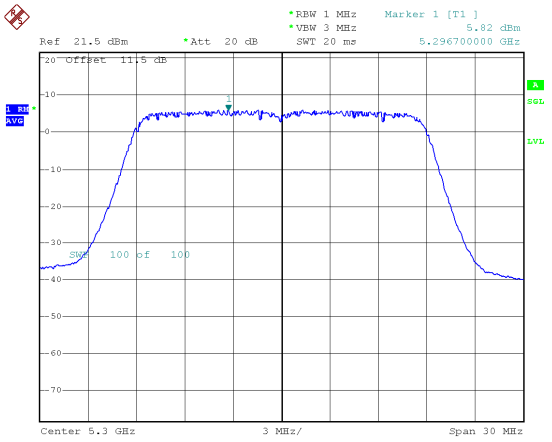

CH64

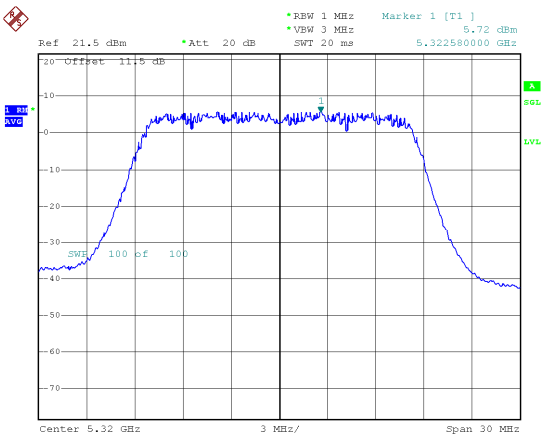

CH64

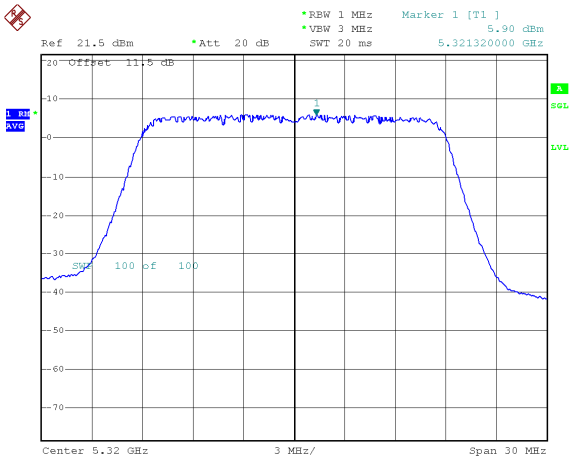

Band 2, ANT B

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH54

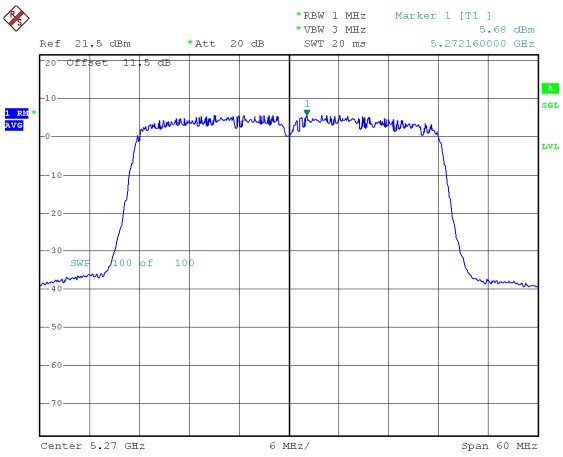

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH58

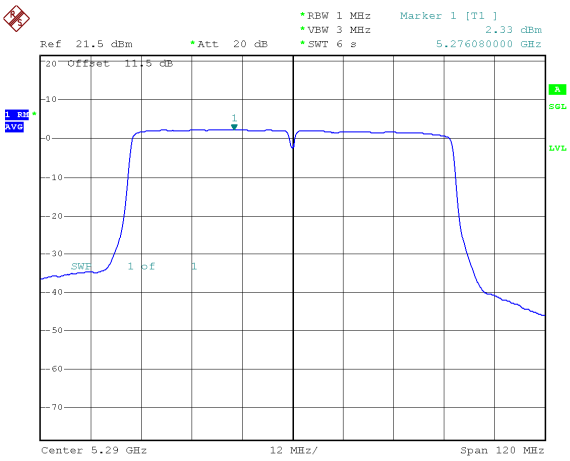

CH62

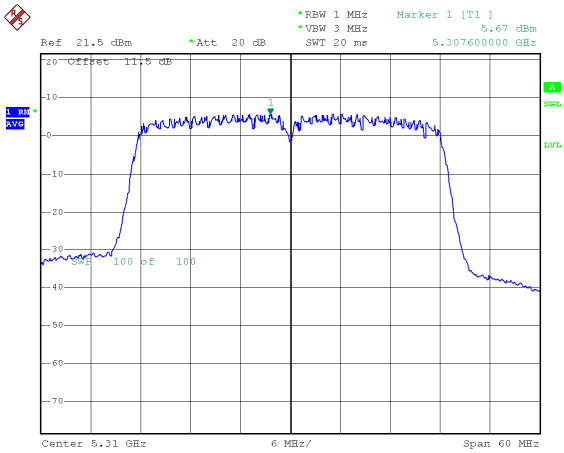

Band 3, ANT A
Modulation Standard: 802.11a (6Mbps)
CH100

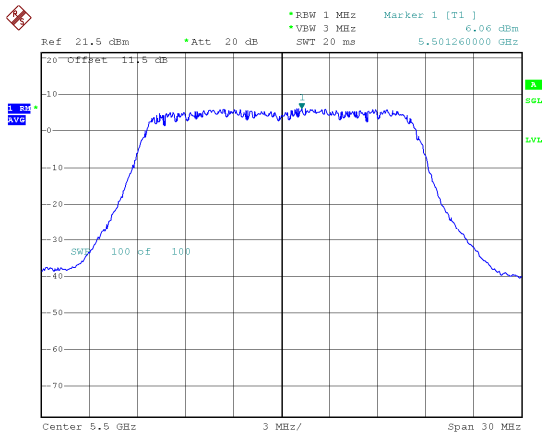

Modulation Standard: 802.11a (6Mbps)
CH144

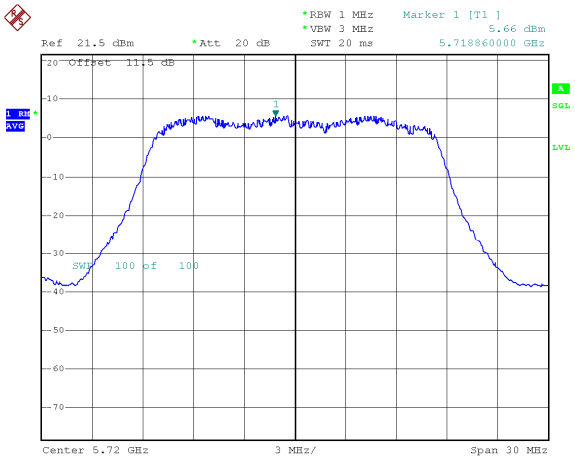

CH116

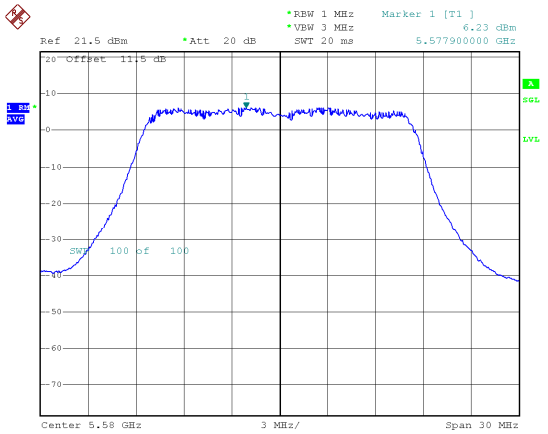

CH140

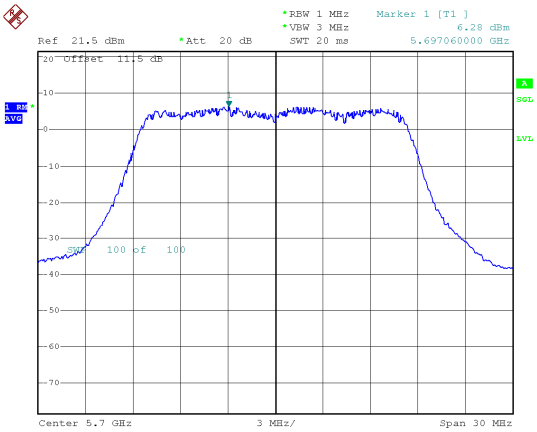

Band 3, ANT A

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH100

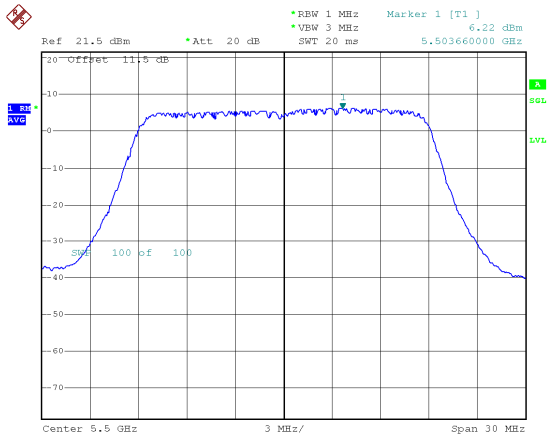

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH144

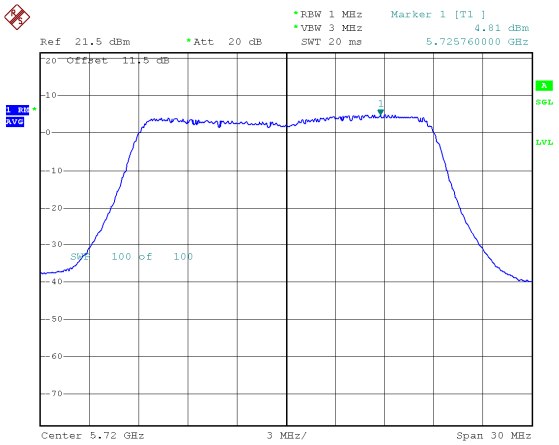

CH116

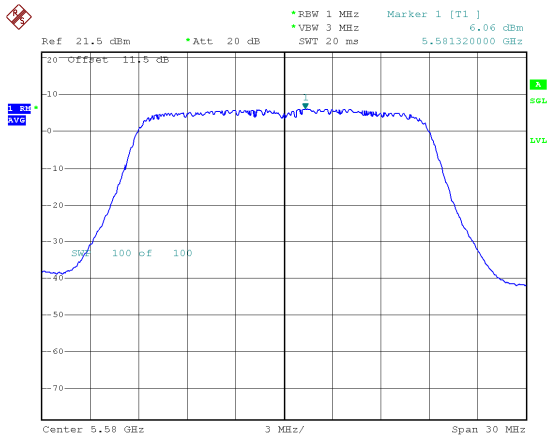

CH140

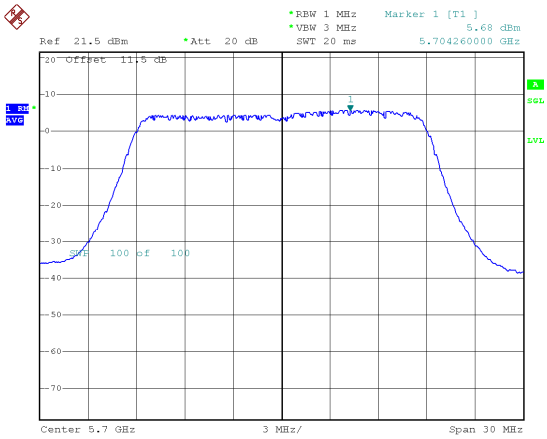

Band 3, ANT A

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH102

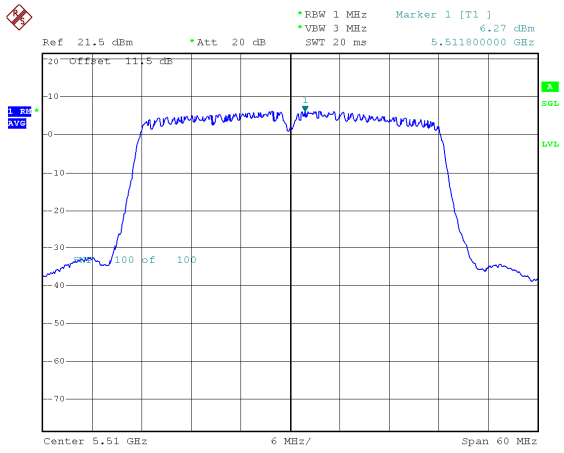

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH142

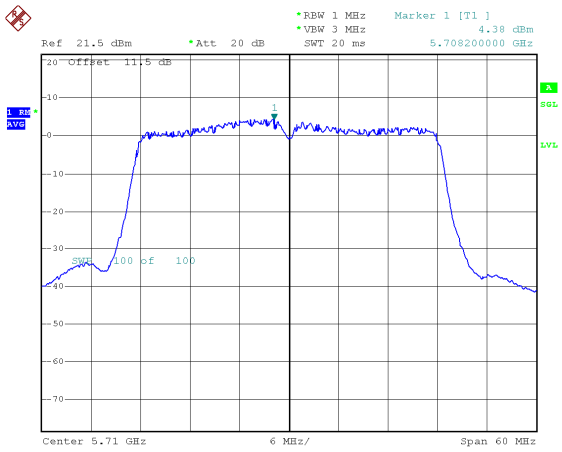

CH110

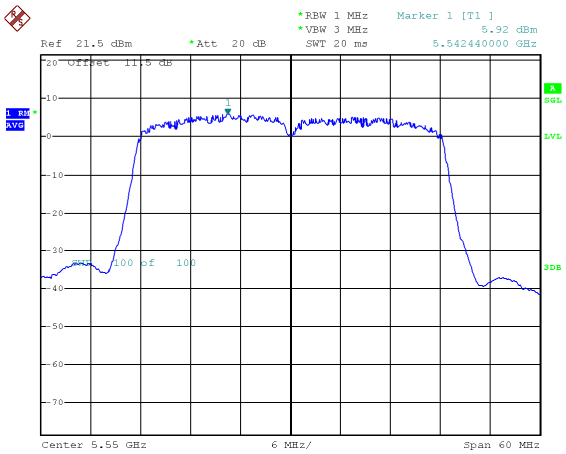

CH134

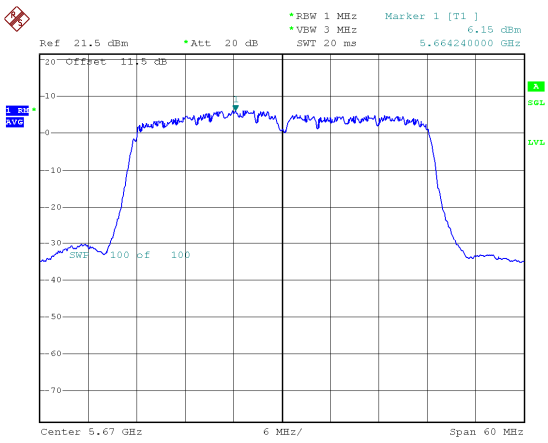

Band 3, ANT A
Modulation Standard: 802.11ac VHT80 (29.3Mbps)
CH106

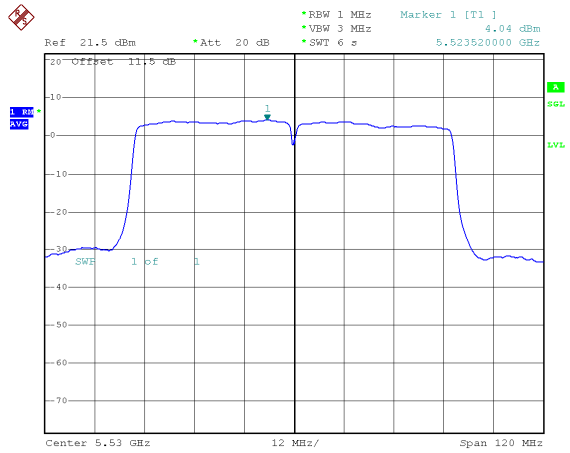

CH138

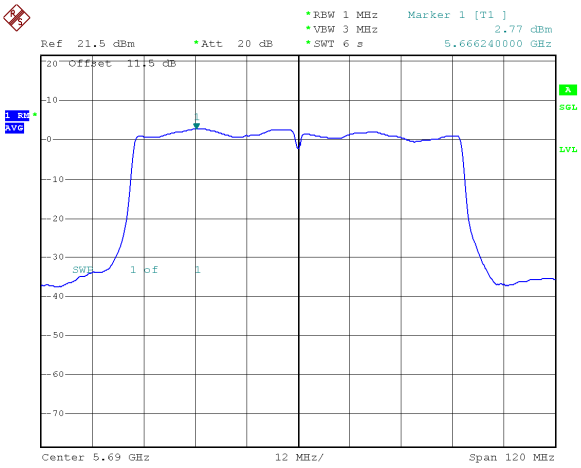

Band 3, ANT B
Modulation Standard: 802.11a (6Mbps)
CH100

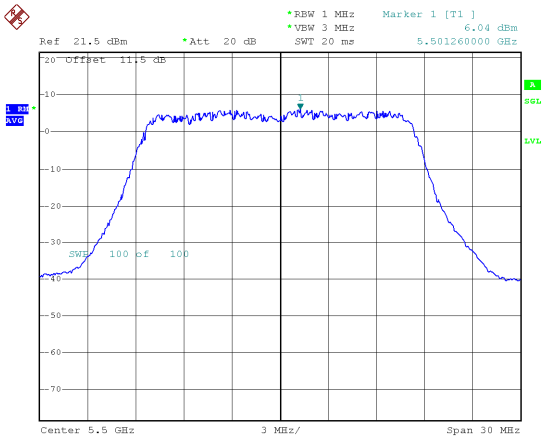

Modulation Standard: 802.11a (6Mbps)
CH144

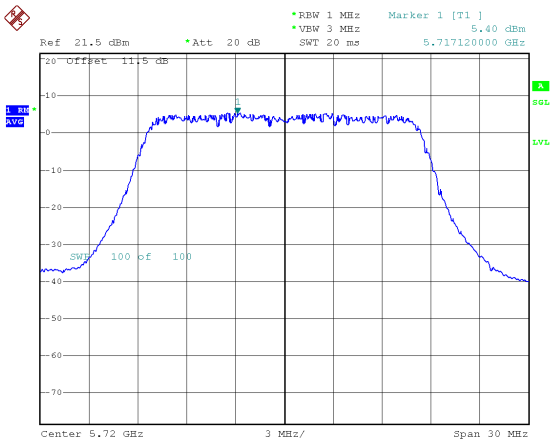

CH116

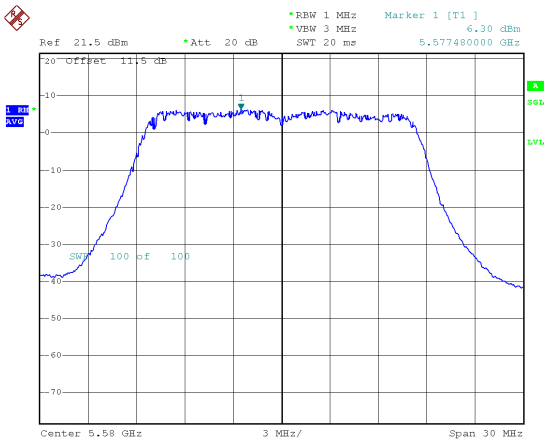

CH140

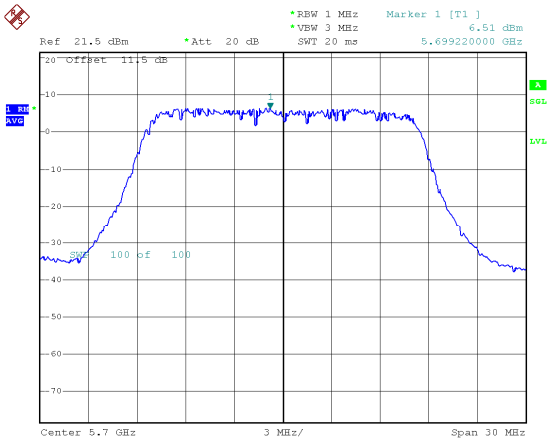

Band 3, ANT B
Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH100

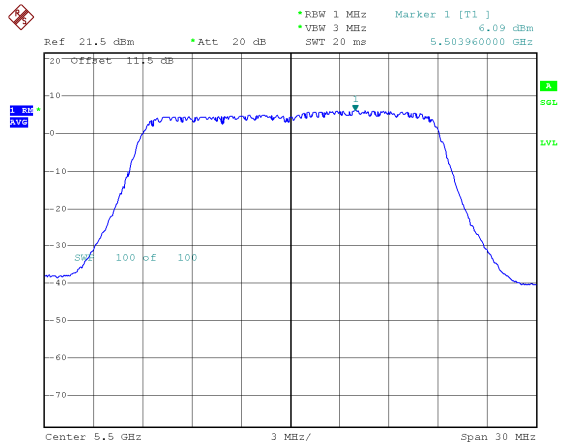

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH144

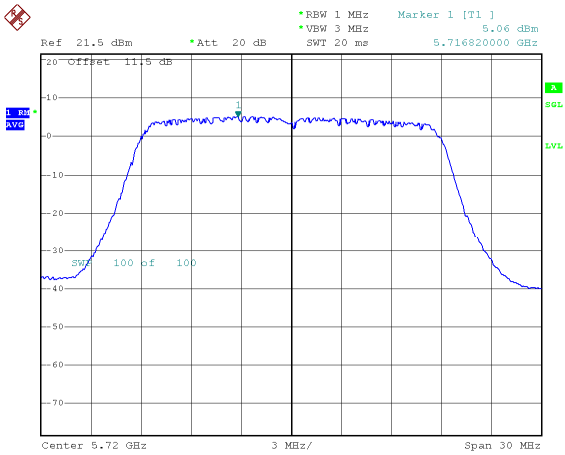

CH116

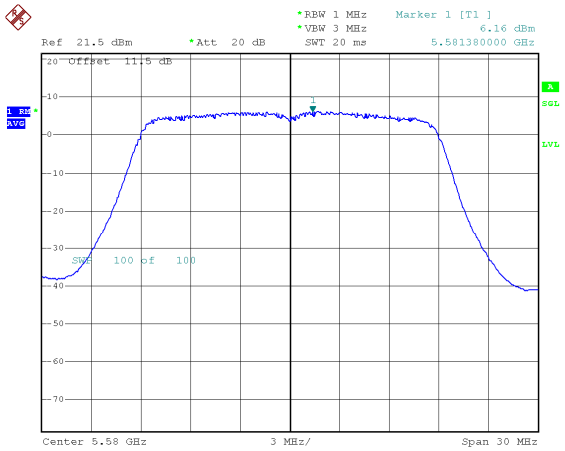

CH140

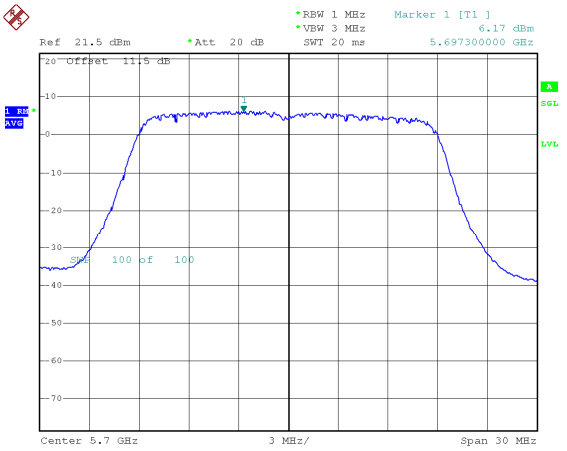

Band 3, ANT B
Modulation Standard: 802.11ac VHT40 (13.5Mbps)
CH102

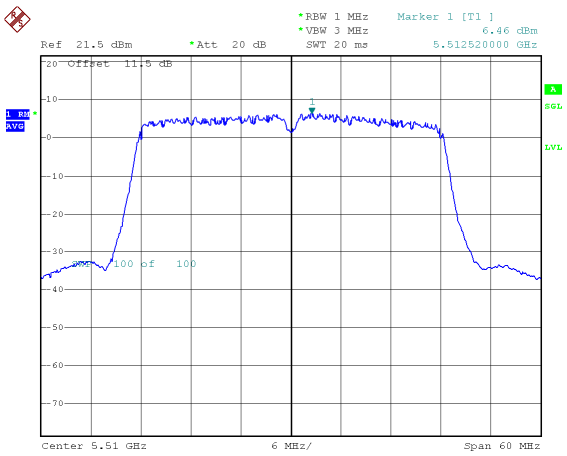

Modulation Standard: 802.11ac VHT40 (13.5Mbps)
CH142

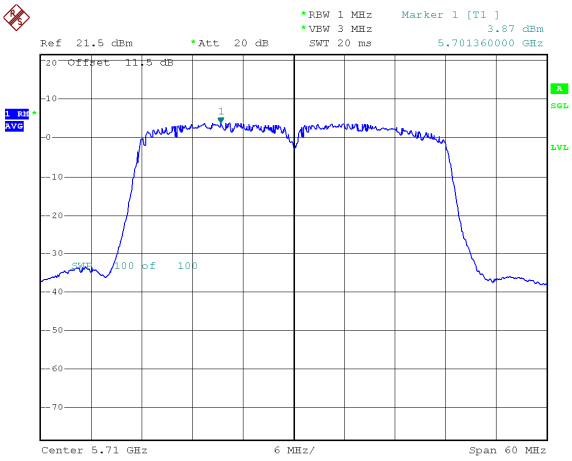

CH110

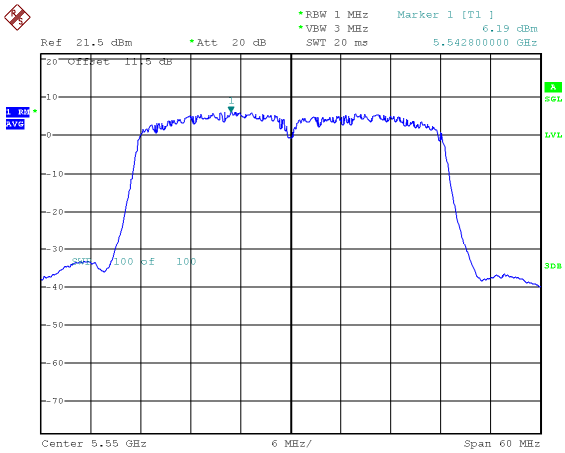

CH134

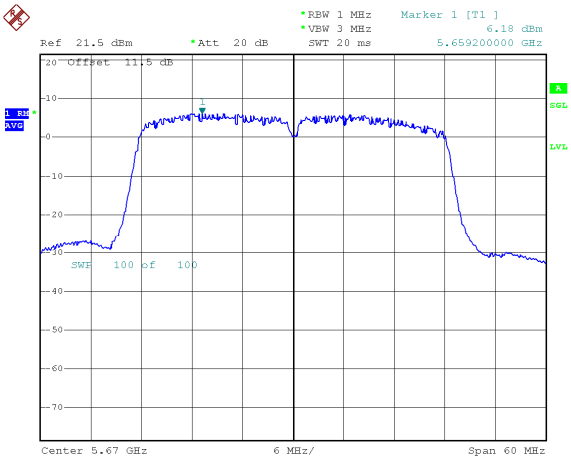

Band 3, ANT B
Modulation Standard: 802.11ac VHT80 (29.3Mbps)
CH106

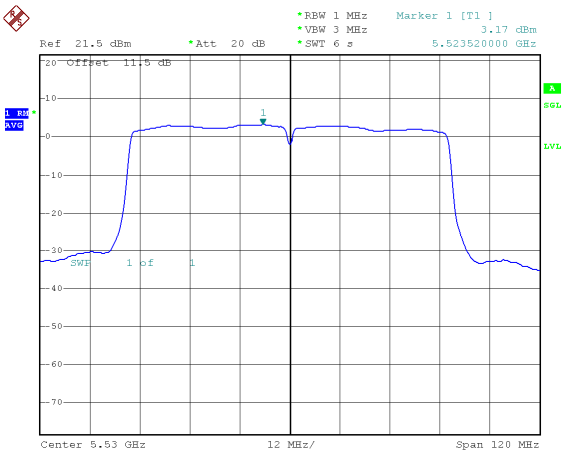

CH138

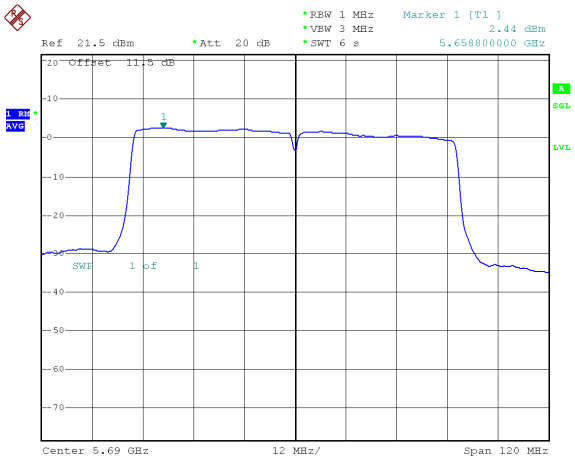

Band 4, ANT A
Modulation Standard: 802.11a (6Mbps)
CH149

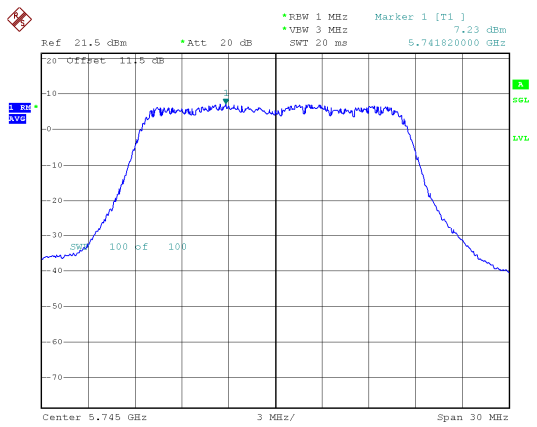

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH149

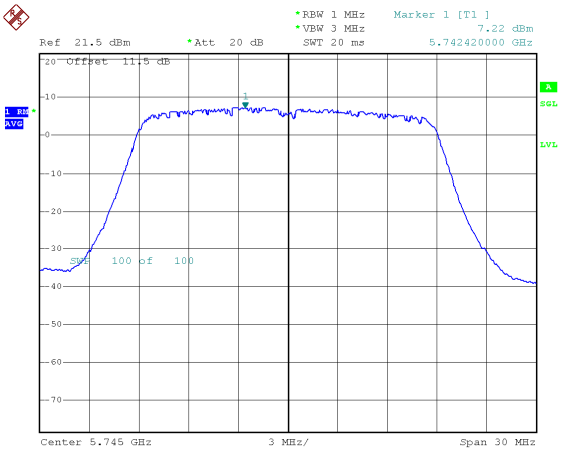

CH157

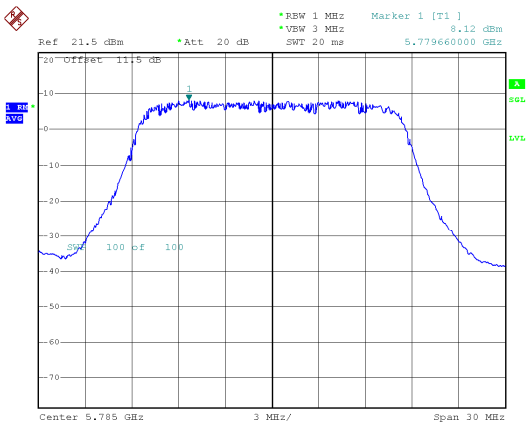

CH157

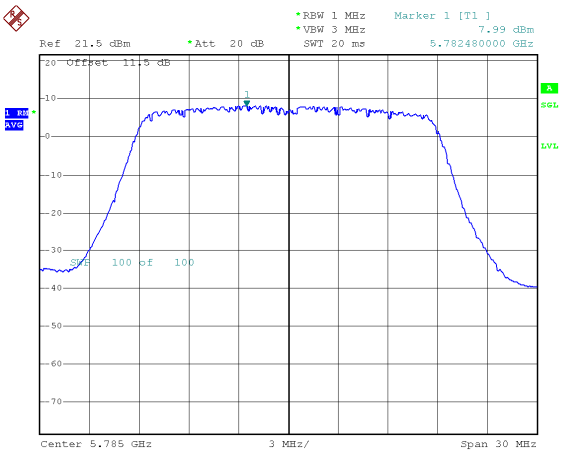

CH165

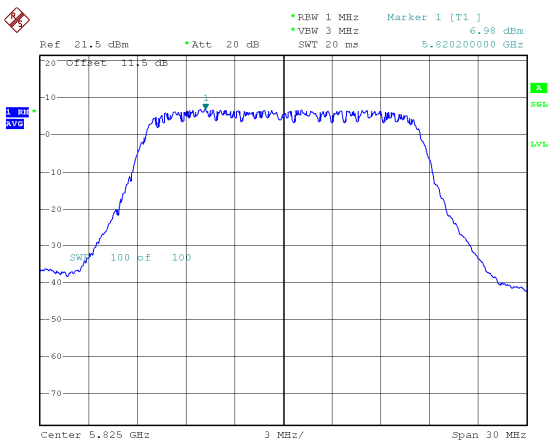

CH165

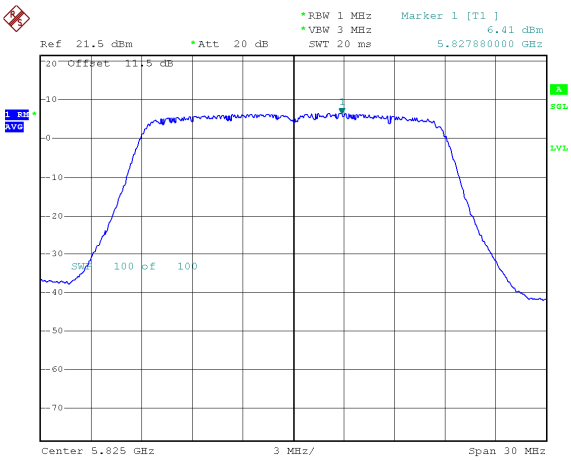

Band 4, ANT A

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH151

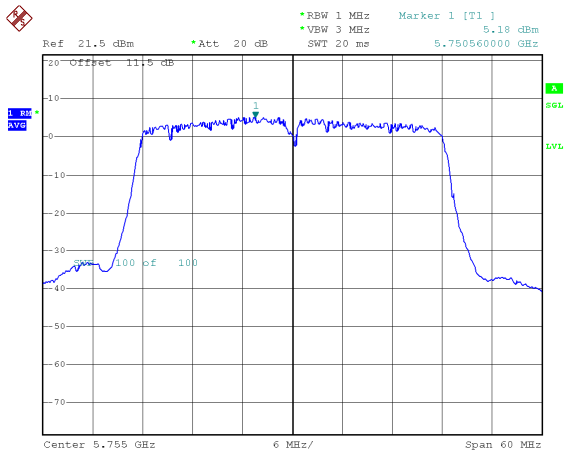

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH155

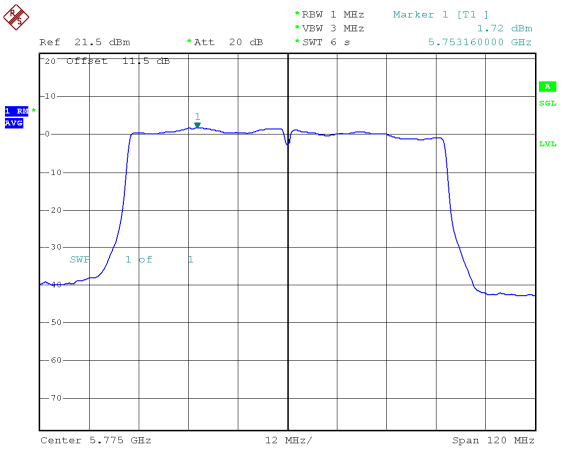

CH159

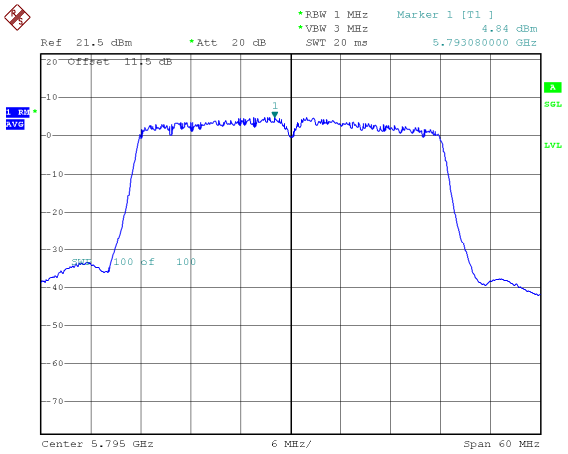

Band 4, ANT B
Modulation Standard: 802.11a (6Mbps)
CH149

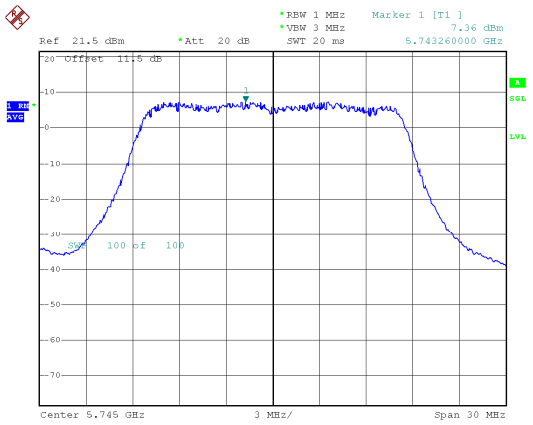

Modulation Standard: 802.11ac VHT20 (6.5Mbps)
CH149

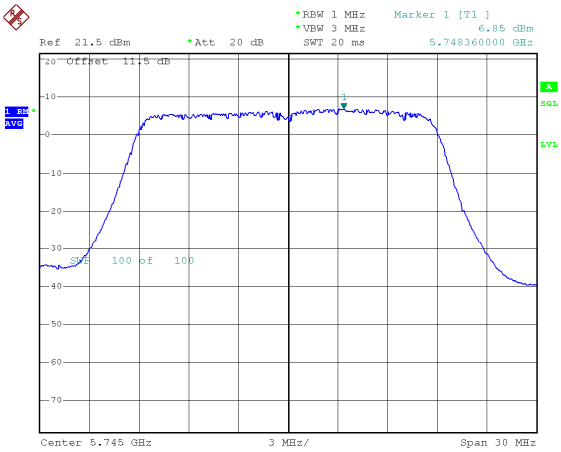

CH157

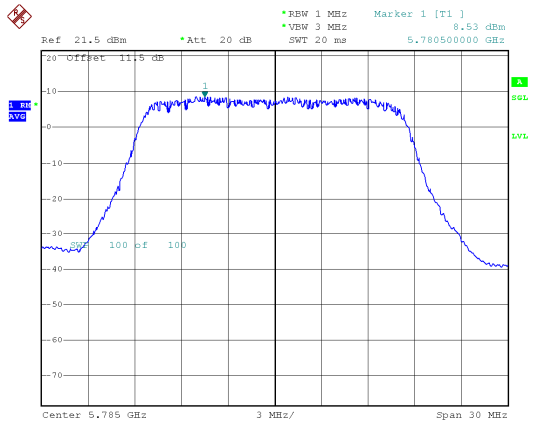

CH157

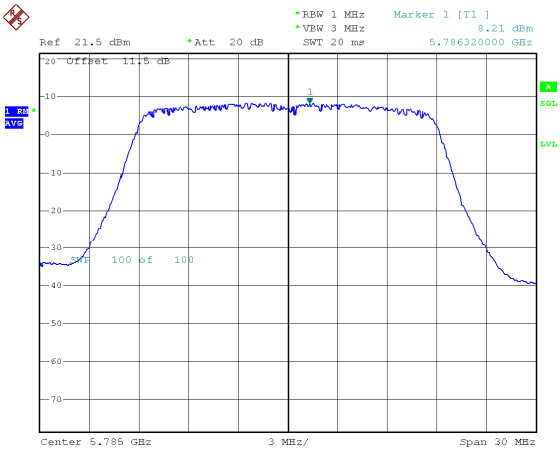

CH165

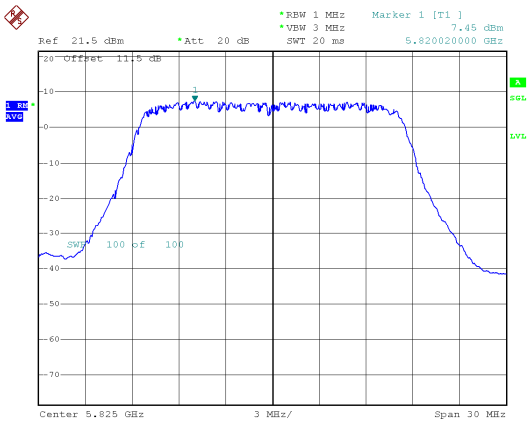

CH165

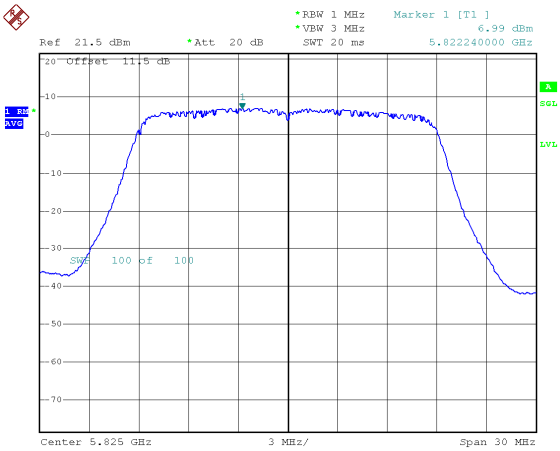

Band 4, ANT B

Modulation Standard: 802.11ac VHT40 (13.5Mbps)

CH151

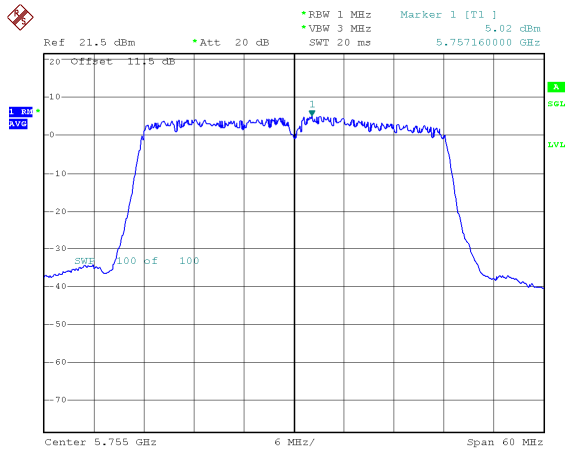

Modulation Standard: 802.11ac VHT80 (29.3Mbps)

CH155

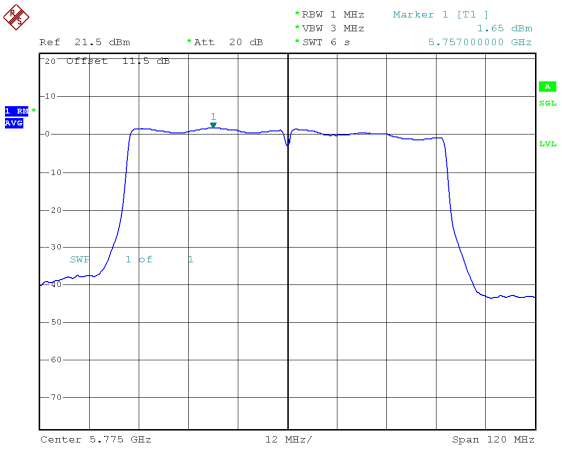

CH159

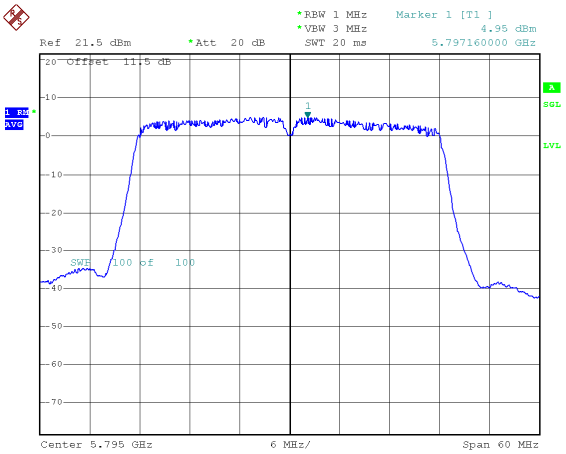

11. 動態頻率選擇

11.1. Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 6 and 7 for the applicability of DFS requirements for each of the operational modes.

Table 6: Applicability of DFS Requirements Prior to Use a Channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	V	V_{Note}	V
DFS Detection Threshold	V	Not required	V
Channel Availability Check Time	V	Not required	Not required
U-NII Detection Bandwidth	V	Not required	V
Note: Per KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.			

Table 7: Applicability of DFS Requirements during Normal Operation

Requirement	Operational Mode	
	Master or Client with radar detection	Client without radar detection
DFS Detection Threshold	V	Not required
Channel Closing Transmission Time	V	V
Channel Move Time	V	V
U-NII Detection Bandwidth	V	Not required

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

11.2. Test Limits and Radar Signal Parameters

Detection Threshold Values

Table 8: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 9: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to acilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Parameters of DFS Test Signals

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 10: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066μ sec, with a minimum increment of 1μ sec, excluding PRI values selected in Test A	Roundup $\left\{\left(\frac{1}{360}\right)\cdot\left(\frac{19\cdot 10^{6}}{PRI_{\mu sec}}\right)\right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Table 11: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency.

a) the Channel center frequency

b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth

c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth

It include 10 trails for every subset, the formula as below,

For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel.

For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by:

*FL+(0.4*Chirp Width [in MHz])*

For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by:

*FL-(0.4*Chirp Width [in MHz])*

Table 12: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

Note: EUT Version: 5.0.0.A19

11.3. Test Setup

Setup for Master with injection at the Master

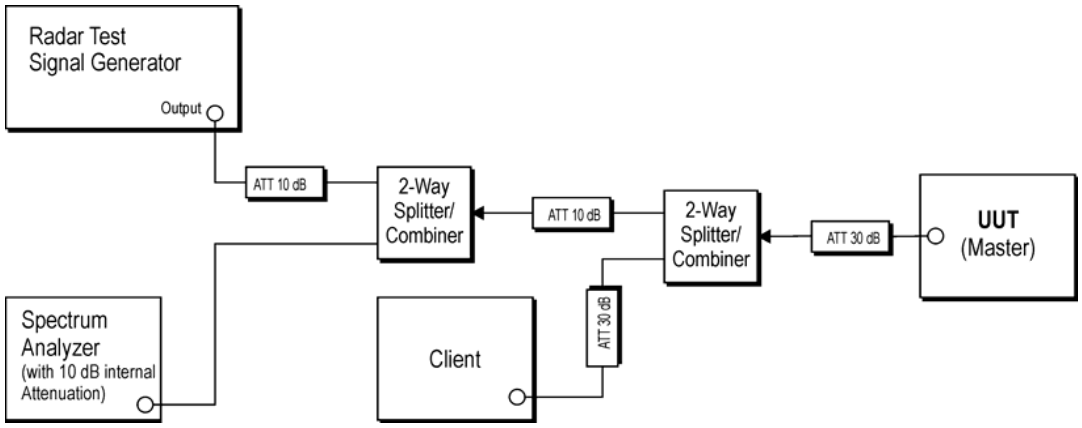

Figure 2: Example Conducted Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

Setup for Client with injection at the Master

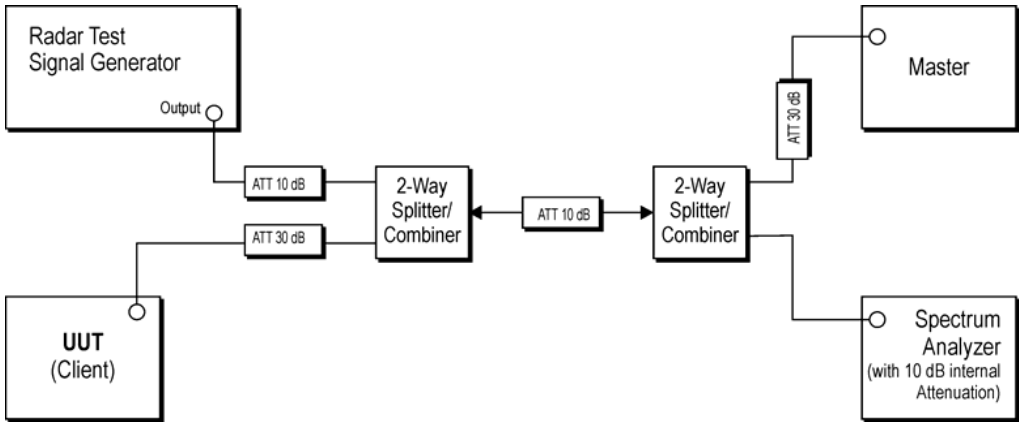

Figure 3: Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Master

Setup for Client with injection at the Client

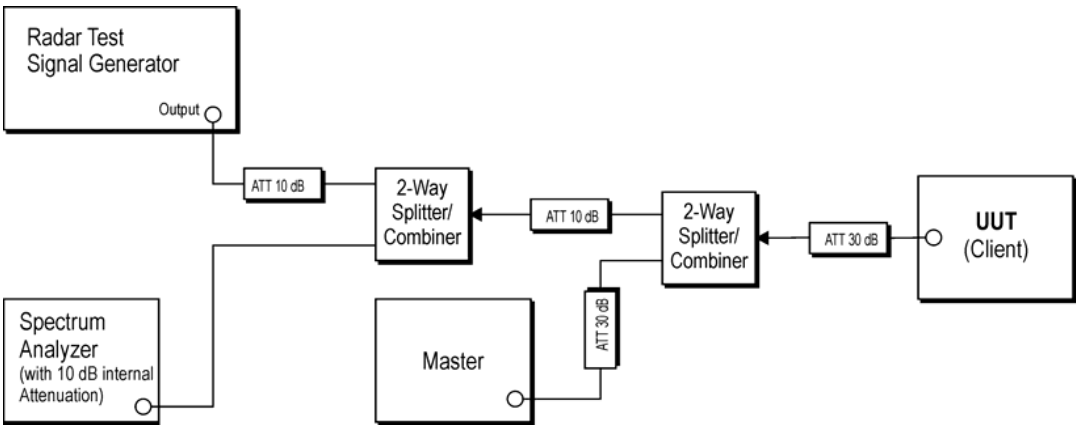

Figure 4: Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Client

Radiated Tests Setup for Master with injection at the Master

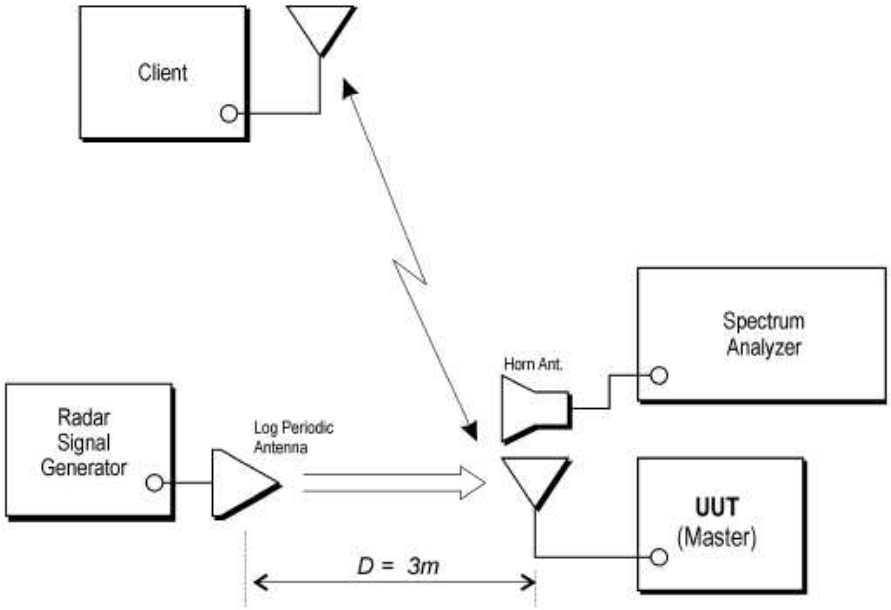

Figure 5: Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master.

Radiated Tests Setup for Client with injection at the Master

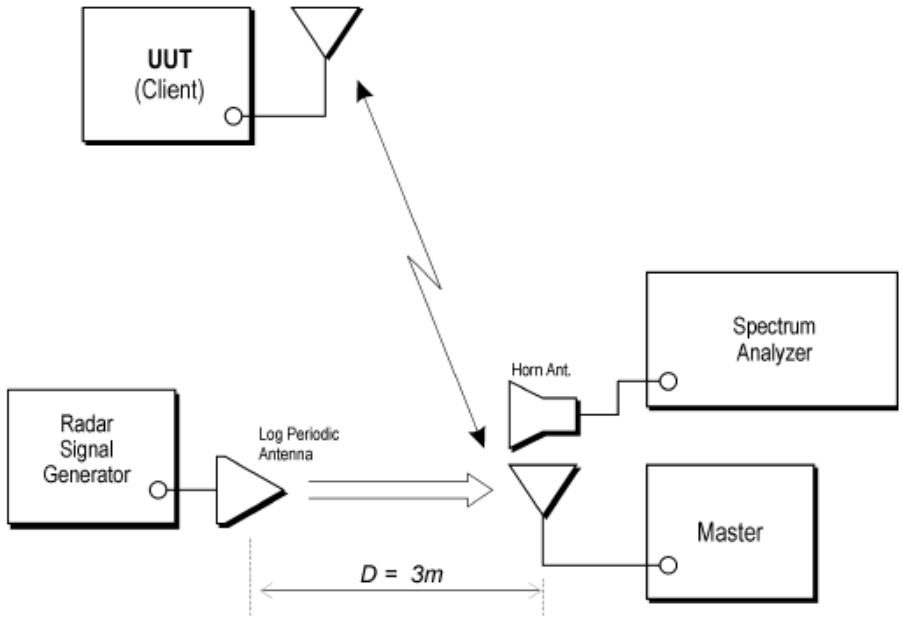

Figure 6: Example Radiated Setup where UUT is a Client and Radar Test Waveforms are injected into the Master

Radiated Tests Setup for Client with injection at the Client

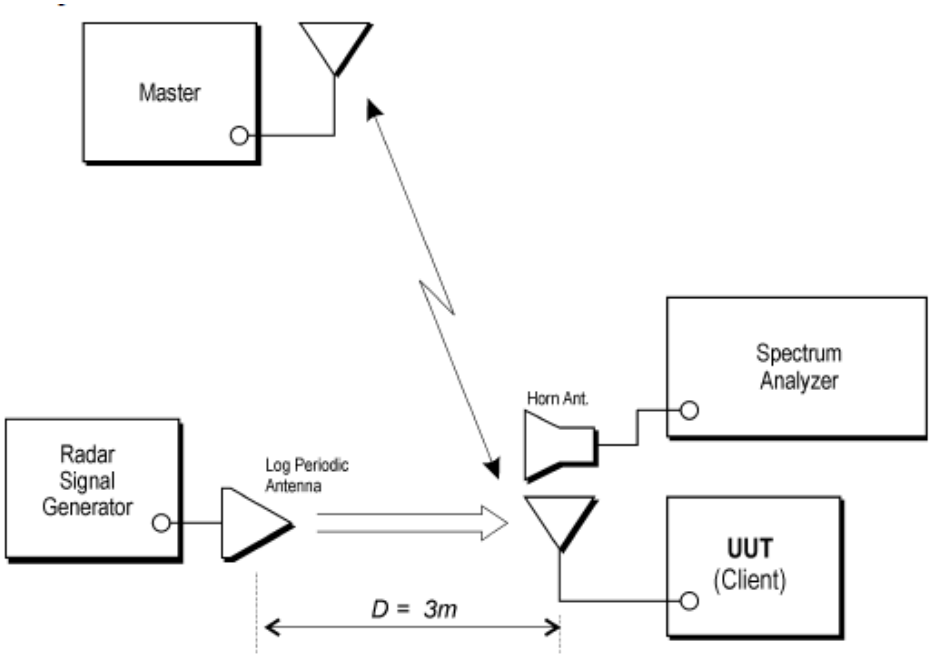

Figure 7: Example Radiated Setup where UUT is a Client and Radar Test Waveforms are injected into the Client.

11.4. DFS Detection Threshold

DFS Detection Threshold is the level used by the DFS mechanism to detect radar interference.

11.4.1. Test Limit

Limits Clause 4.7.2.1.2
DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

MAXIMUM TRANSMIT POWER	VALUE (SEE Note 1 and 2)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911	

11.4.2. Test Result of DFS Detection Threshold

Radar Type 1 Calibration Plot

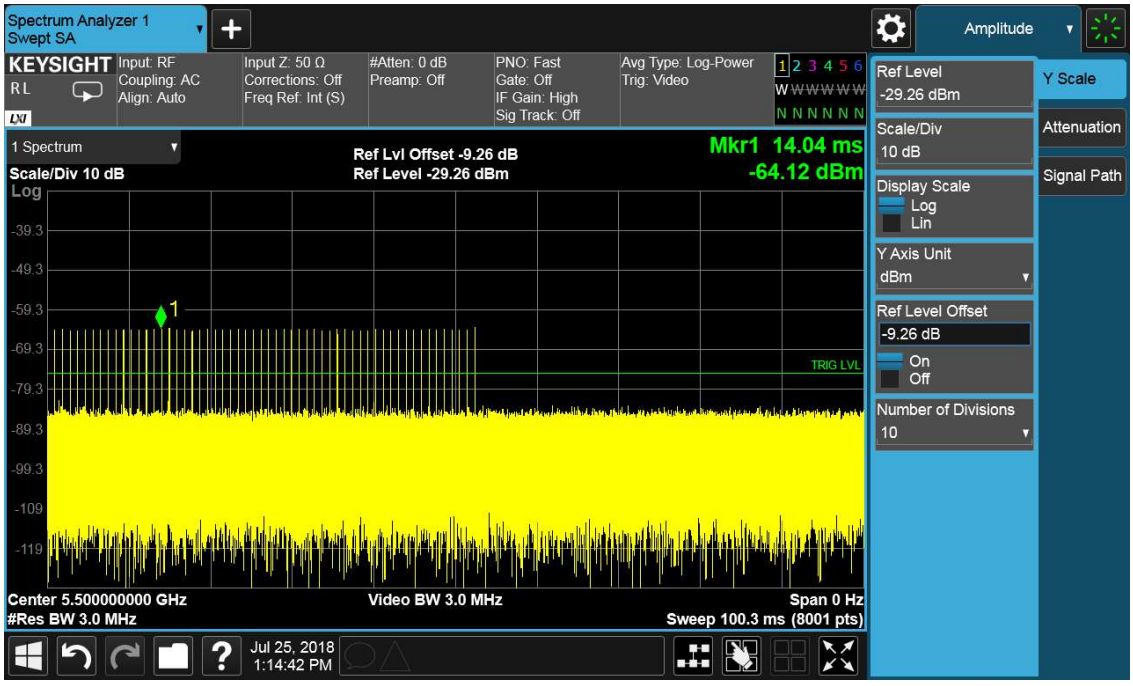

Radar Type 2 Calibration Plot

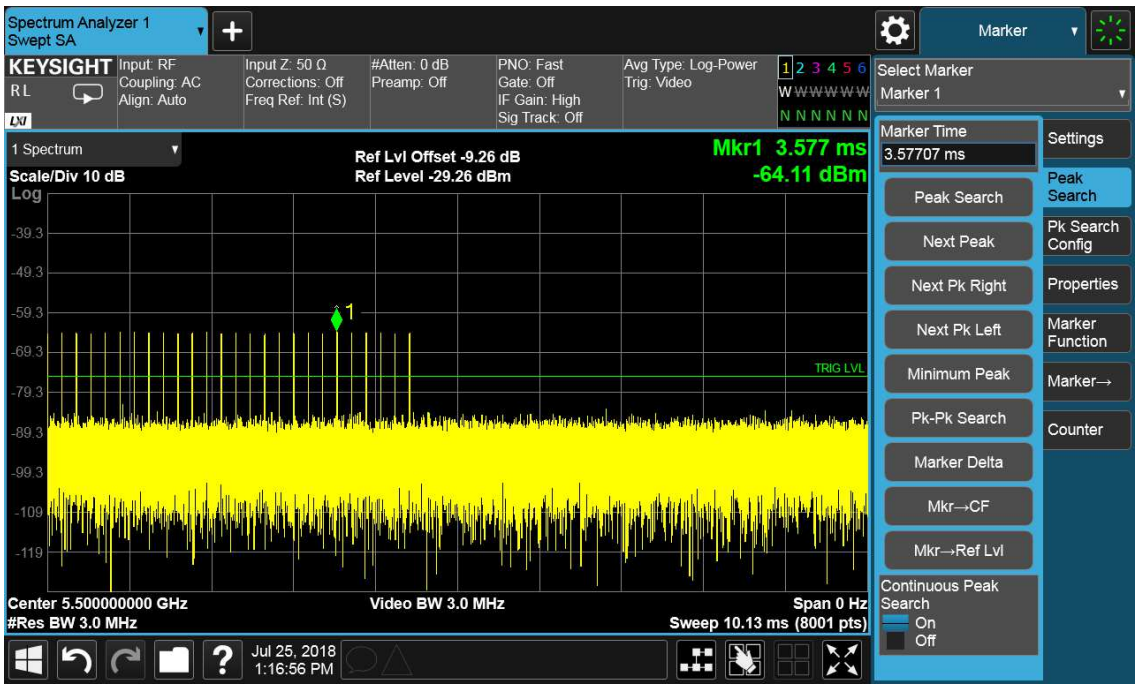

Radar Type 3 Calibration Plot

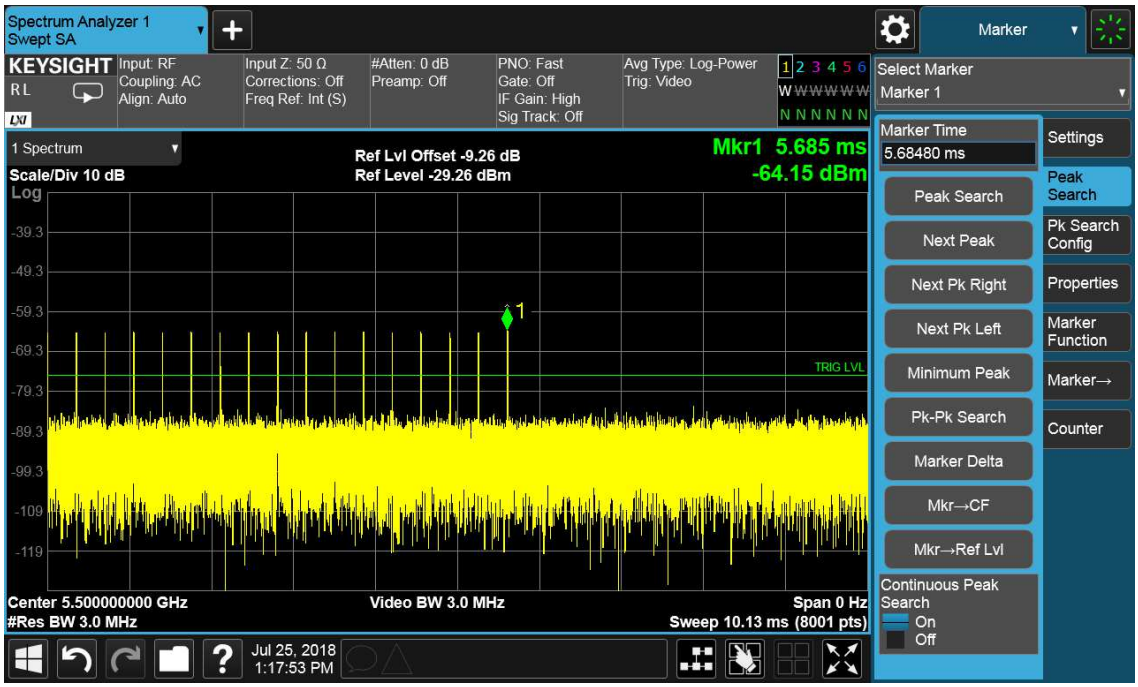

Radar Type 4 Calibration Plot

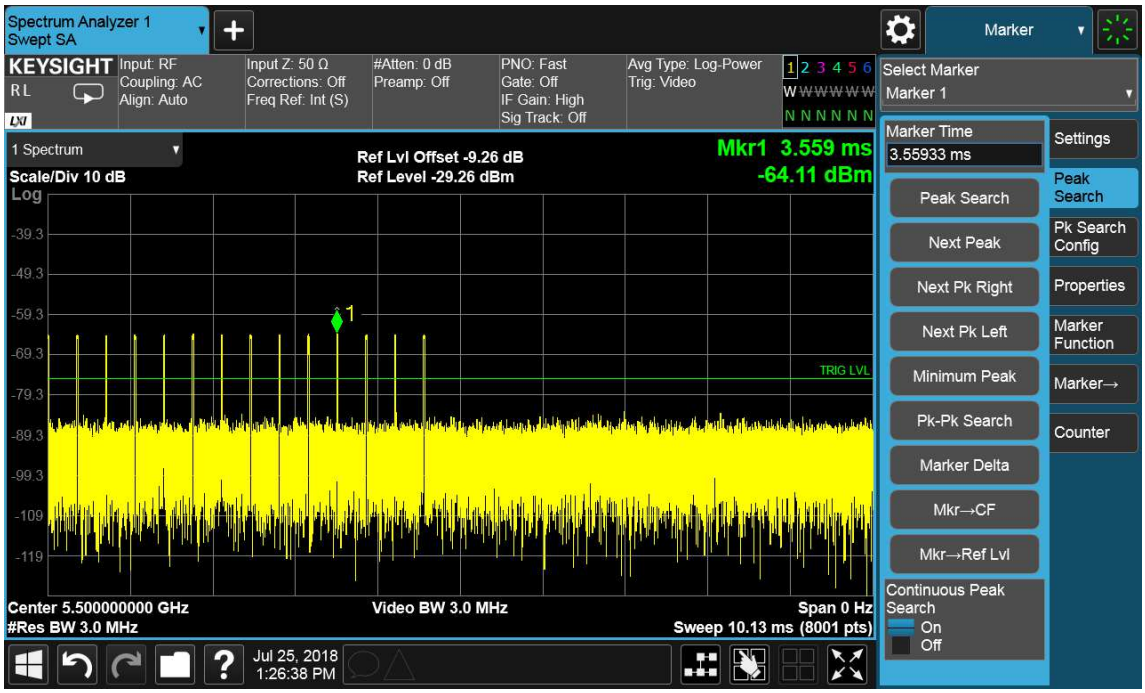

Radar Type 5 Calibration Plot

Radar Type 6 Calibration Plot

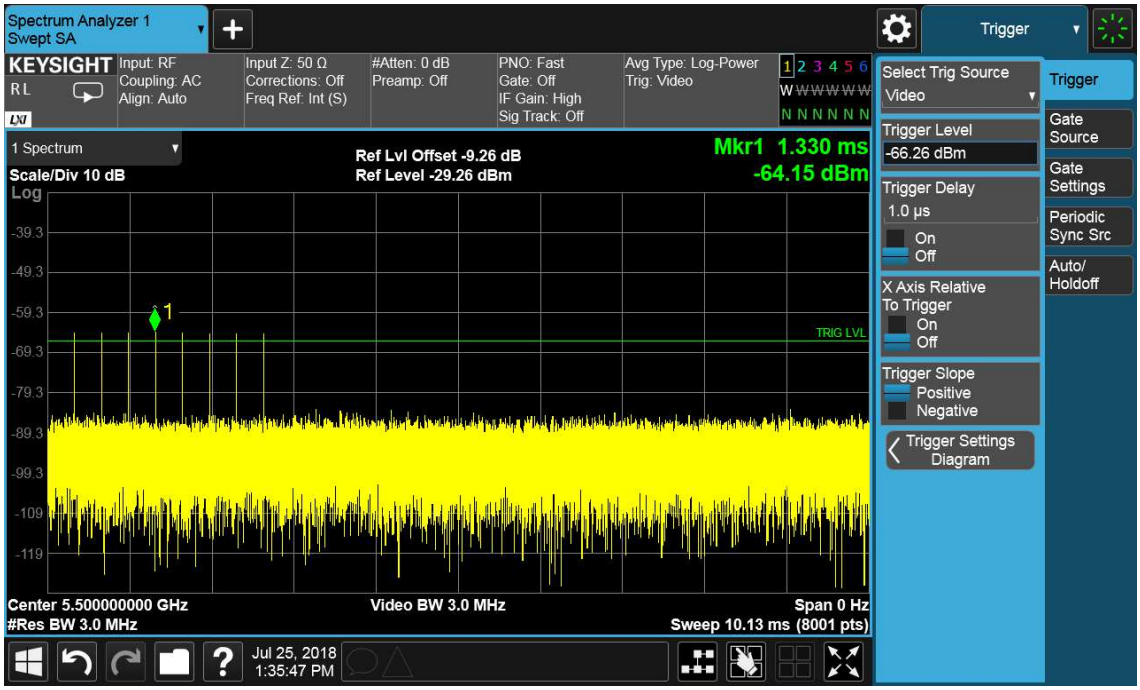

11.5. Channel Availability Check Time

The Channel Availability Check is defined as the mechanism by which an RLAN device checks a channel for the presence of radar signals.
There shall be no transmissions by the device within the channel being checked during this process.
If no radars have been detected, the channel becomes an Available Channel valid for a period of time.
The RLAN shall only start transmissions on Available Channels.
At power-up, the RLAN is assumed to have no Available Channels.

11.5.1. **Test Limit**

Limits Clause 4.7.2.1.2
Table D.2: DFS requirement values

Parameter	Value
Channel Availability Check	> 60s

11.5.2. **Test Result of Channel Availability Check**

Modulation Standard: 802.11ac VHT20

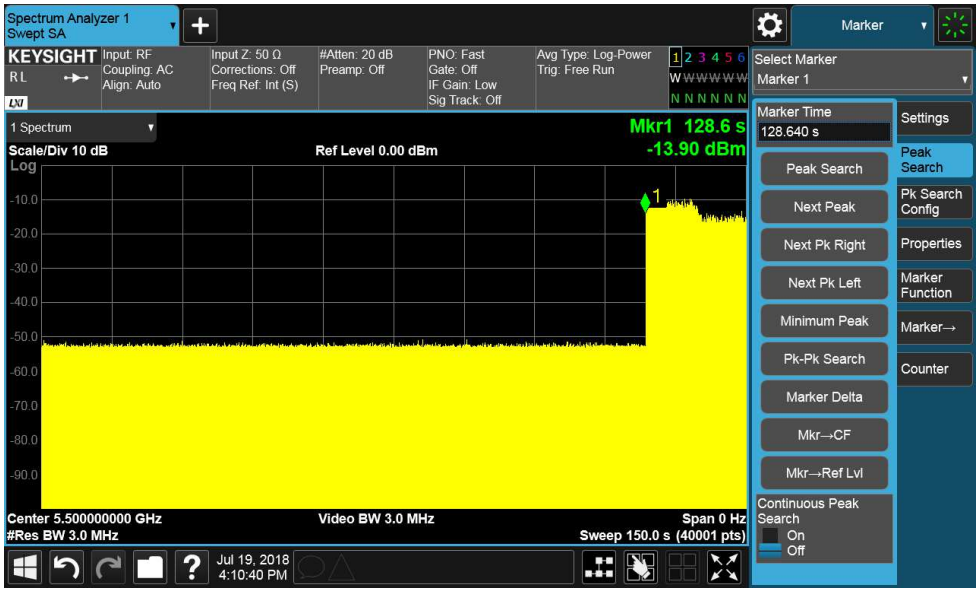

Modulation Standard: 802.11ac VHT40

Modulation Standard: 802.11ac VHT80

11.6. Radar Burst at the Beginning of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time. This is illustrated in **Figure 15**.

a) The Radar Waveform generator and UUT are connected using the applicable test setup described in the sections on configuration for Conducted Tests or Radiated Tests and the power of the UUT is switched off.

b) The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence (Tpower_up). The Channel Availability Check Time commences on Chr at instant T1 and will end no sooner than T1 + Tch_avail_check.

c) A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window starting at T1. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.

d) Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for UUT emissions will continue for 2.5 minutes after the radar Burst has been generated.

e) Verify that during the 2.5 minute measurement window no UUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

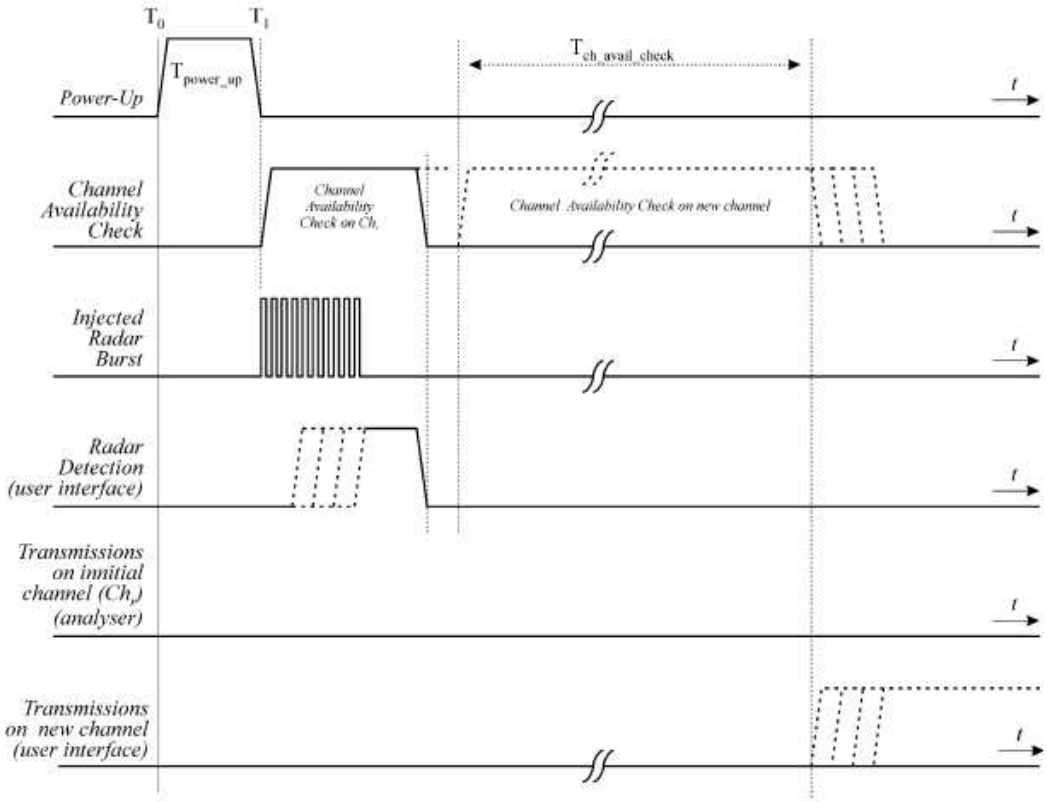

Figure 15: Example of timing for radar testing at the beginning of the Channel Availability Check Time

11.6.1. **Test Result of radar burst at the beginning of the Channel Availability Check Time**

Modulation Standard: 802.11ac VHT80, 5280MHz

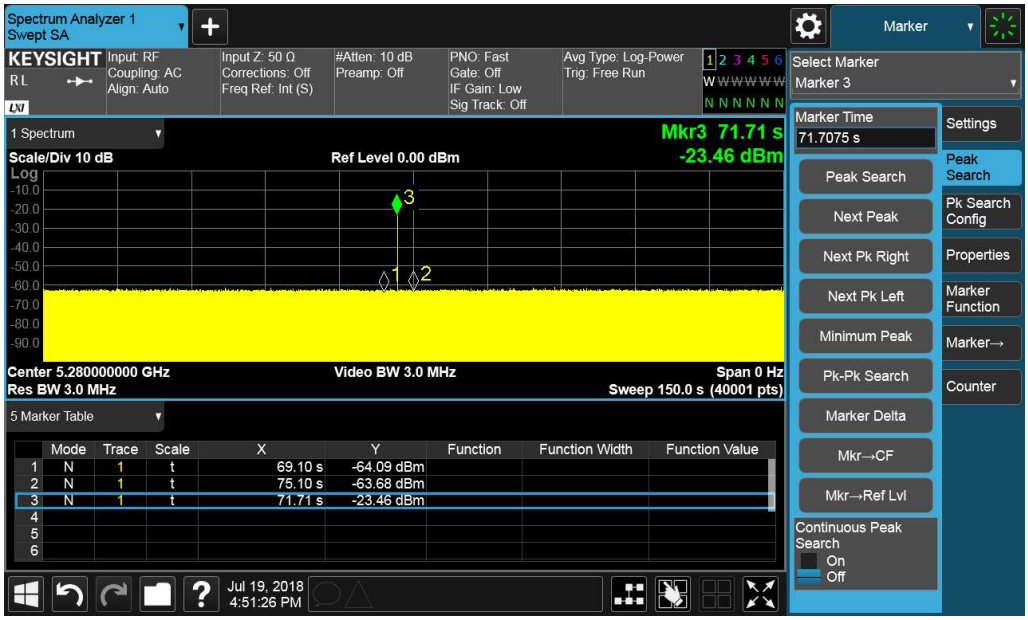

Modulation Standard: 802.11ac VHT80, 5500MHz

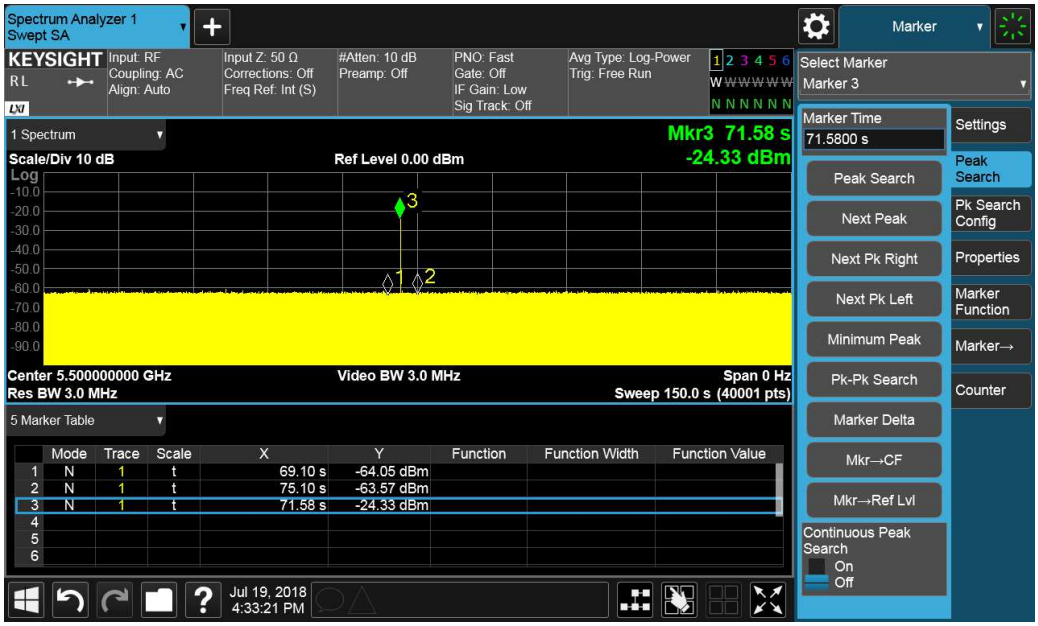

11.7. Radar Burst at the End of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1dB occurs at the end of the Channel Availability Check Time. This is illustrated in **Figure 16**.

a) The Radar Waveform generator and UUT are connected using the applicable test setup described in the sections for Conducted Tests or Radiated Tests and the power of the UUT is switched off.

b) The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence (Tpower_up). The Channel Availability Check Time commences on Chr at instant T1 and will end no sooner than T1 + Tch_avail_check.

c) A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window starting at T1 + 54 seconds. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.

d) Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for UUT emissions will continue for 2.5 minutes after the radar Burst has been generated.

e) Verify that during the 2.5 minute measurement window no UUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

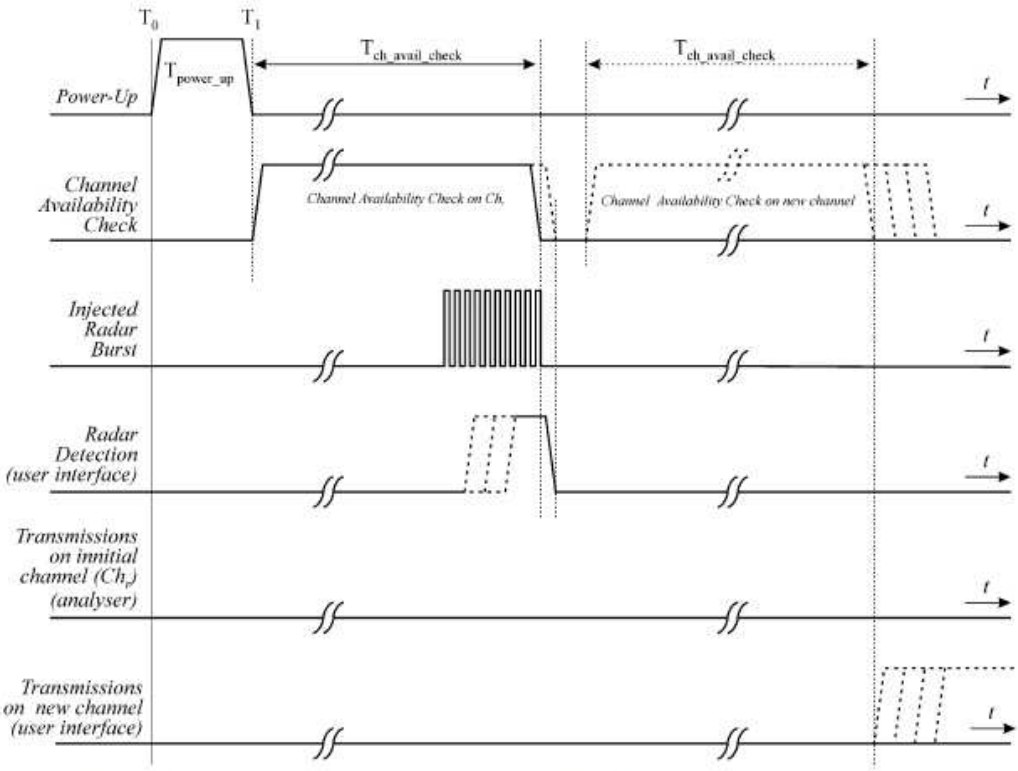

Figure 16: Example of timing for radar testing towards the end of the Channel Availability Check Time

11.7.1. **Test Result of radar burst at the end of the Channel Availability Check Time**

Modulation Standard: 802.11ac VHT80, 5280MHz

Modulation Standard: 802.11ac VHT80, 5500MHz

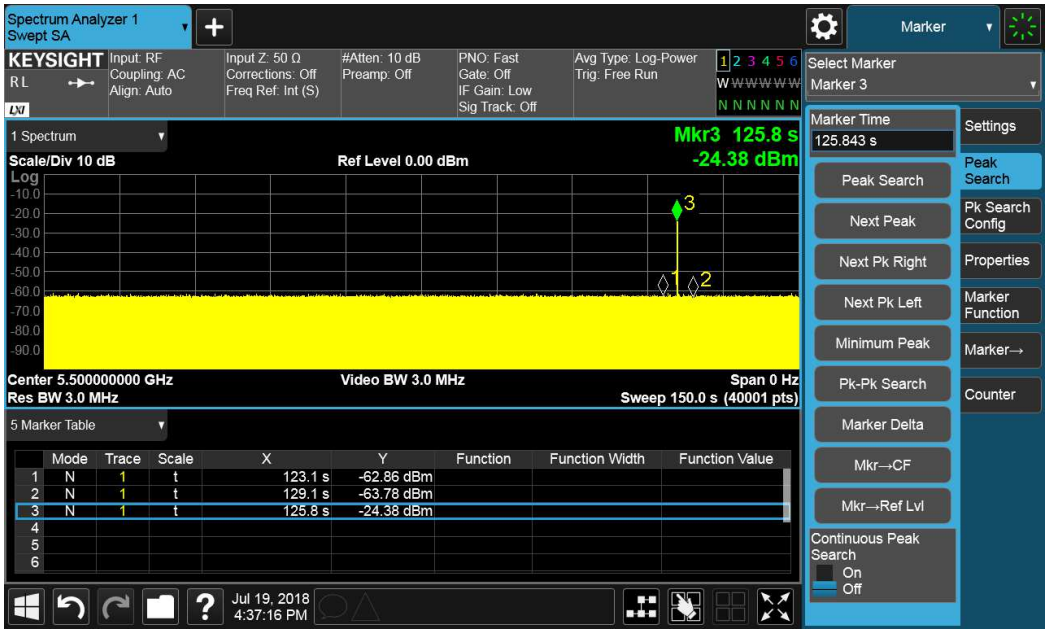

11.8.U-NII Detection Bandwidth

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

11.8.1. **Test Limit**

Limits Clause 4.7.2.1.2 Table D.2: DFS requirement values

Parameter	Value
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission
Note : During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

11.8.2. Test Result of U-NII Detection Bandwidth

20 MHz Signal Bandwidth											
EUT Frequency = 5320MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5310(FL)	1	1	1	1	1	1	1	1	1	1	100%
5311	1	1	1	1	1	1	1	1	1	1	100%
5312	1	1	1	1	1	1	1	1	1	1	100%
5313	1	1	1	1	1	1	1	1	1	1	100%
5314	1	1	1	1	1	1	1	1	1	1	100%
5315	1	1	1	1	1	1	1	1	1	1	100%
5316	1	1	1	1	1	1	1	1	1	1	100%
5317	1	1	1	1	1	1	1	1	1	1	100%
5318	1	1	1	1	1	1	1	1	1	1	100%
5319	1	1	1	1	1	1	1	1	1	1	100%
5320	1	1	1	1	1	1	1	1	1	1	100%
5321	1	1	1	1	1	1	1	1	1	1	100%
5322	1	1	1	1	1	1	1	1	1	1	100%
5323	1	1	1	1	1	1	1	1	1	1	100%
5324	1	1	1	1	1	1	1	1	1	1	100%
5325	1	1	1	1	1	1	1	1	1	1	100%
5326	1	1	1	1	1	1	1	1	1	1	100%
5327	1	1	1	1	1	1	1	1	1	1	100%
5328	1	1	1	1	1	1	1	1	1	1	100%
5329	1	1	1	1	1	1	1	1	1	1	100%
5330(FH)	1	1	1	1	1	1	1	1	1	1	100%
20 MHz Detection Bandwidth = Fh - Fl = 5330MHz - 5310MHz = 20MHz											
EUT 99% Bandwidth = 18.795MHz											

20 MHz Signal Bandwidth											
EUT Frequency = 5500MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5490(FL)	1	1	1	1	1	1	1	1	1	1	100%
5491	1	1	1	1	1	1	1	1	1	1	100%
5492	1	1	1	1	1	1	1	1	1	1	100%
5493	1	1	1	1	1	1	1	1	1	1	100%
5494	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5496	1	1	1	1	1	1	1	1	1	1	100%
5497	1	1	1	1	1	1	1	1	1	1	100%
5498	1	1	1	1	1	1	1	1	1	1	100%
5499	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5501	1	1	1	1	1	1	1	1	1	1	100%
5502	1	1	1	1	1	1	1	1	1	1	100%
5503	1	1	1	1	1	1	1	1	1	1	100%
5504	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5506	1	1	1	1	1	1	1	1	1	1	100%
5507	1	1	1	1	1	1	1	1	1	1	100%
5508	1	1	1	1	1	1	1	1	1	1	100%
5509	1	1	1	1	1	1	1	1	1	1	100%
5510(FH)	1	1	1	1	1	1	1	1	1	1	100%
20 MHz Detection Bandwidth = Fh - Fl = 5510MHz - 5490MHz = 20MHz											
EUT 99% Bandwidth = 18.795MHz											

40 MHz Signal Bandwidth											
EUT Frequency = 5310MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5291(FL)	1	1	1	1	1	1	1	1	1	1	100%
5292	1	1	1	1	1	1	1	1	1	1	100%
5293	1	1	1	1	1	1	1	1	1	1	100%
5294	1	1	1	1	1	1	1	1	1	1	100%
5295	1	1	1	1	1	1	1	1	1	1	100%
5296	1	1	1	1	1	1	1	1	1	1	100%
5297	1	1	1	1	1	1	1	1	1	1	100%
5298	1	1	1	1	1	1	1	1	1	1	100%
5299	1	1	1	1	1	1	1	1	1	1	100%
5300	1	1	1	1	1	1	1	1	1	1	100%
5301	1	1	1	1	1	1	1	1	1	1	100%
5302	1	1	1	1	1	1	1	1	1	1	100%
5303	1	1	1	1	1	1	1	1	1	1	100%
5304	1	1	1	1	1	1	1	1	1	1	100%
5305	1	1	1	1	1	1	1	1	1	1	100%
5306	1	1	1	1	1	1	1	1	1	1	100%
5307	1	1	1	1	1	1	1	1	1	1	100%
5308	1	1	1	1	1	1	1	1	1	1	100%
5309	1	1	1	1	1	1	1	1	1	1	100%
5310	1	1	1	1	1	1	1	1	1	1	100%
5311	1	1	1	1	1	1	1	1	1	1	100%
5312	1	1	1	1	1	1	1	1	1	1	100%
5313	1	1	1	1	1	1	1	1	1	1	100%
5314	1	1	1	1	1	1	1	1	1	1	100%
5315	1	1	1	1	1	1	1	1	1	1	100%
5316	1	1	1	1	1	1	1	1	1	1	100%
5317	1	1	1	1	1	1	1	1	1	1	100%

40 MHz Signal Bandwidth											
EUT Frequency = 5310MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5318	1	1	1	1	1	1	1	1	1	1	100%
5319	1	1	1	1	1	1	1	1	1	1	100%
5320	1	1	1	1	1	1	1	1	1	1	100%
5321	1	1	1	1	1	1	1	1	1	1	100%
5322	1	1	1	1	1	1	1	1	1	1	100%
5323	1	1	1	1	1	1	1	1	1	1	100%
5324	1	1	1	1	1	1	1	1	1	1	100%
5325	1	1	1	1	1	1	1	1	1	1	100%
5326	1	1	1	1	1	1	1	1	1	1	100%
5327	1	1	1	1	1	1	1	1	1	1	100%
5328	1	1	1	1	1	1	1	1	1	1	100%
5329(FH)	1	1	1	1	1	1	1	1	1	1	100%
40 MHz Detection Bandwidth = Fh - Fl = 5329MHz - 5291MHz = 38MHz											
EUT 99% Bandwidth = 36.506MHz											

40 MHz Signal Bandwidth											
EUT Frequency = 5510MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5491(FL)	1	1	1	1	1	1	1	1	1	1	100%
5492	1	1	1	1	1	1	1	1	1	1	100%
5493	1	1	1	1	1	1	1	1	1	1	100%
5494	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5496	1	1	1	1	1	1	1	1	1	1	100%
5497	1	1	1	1	1	1	1	1	1	1	100%
5498	1	1	1	1	1	1	1	1	1	1	100%
5499	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5501	1	1	1	1	1	1	1	1	1	1	100%
5502	1	1	1	1	1	1	1	1	1	1	100%
5503	1	1	1	1	1	1	1	1	1	1	100%
5504	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5506	1	1	1	1	1	1	1	1	1	1	100%
5507	1	1	1	1	1	1	1	1	1	1	100%
5508	1	1	1	1	1	1	1	1	1	1	100%
5509	1	1	1	1	1	1	1	1	1	1	100%
5510	1	1	1	1	1	1	1	1	1	1	100%
5511	1	1	1	1	1	1	1	1	1	1	100%
5512	1	1	1	1	1	1	1	1	1	1	100%
5513	1	1	1	1	1	1	1	1	1	1	100%
5514	1	1	1	1	1	1	1	1	1	1	100%
5515	1	1	1	1	1	1	1	1	1	1	100%
5516	1	1	1	1	1	1	1	1	1	1	100%
5517	1	1	1	1	1	1	1	1	1	1	100%

40 MHz Signal Bandwidth											
EUT Frequency = 5510MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5518	1	1	1	1	1	1	1	1	1	1	100%
5519	1	1	1	1	1	1	1	1	1	1	100%
5520	1	1	1	1	1	1	1	1	1	1	100%
5521	1	1	1	1	1	1	1	1	1	1	100%
5522	1	1	1	1	1	1	1	1	1	1	100%
5523	1	1	1	1	1	1	1	1	1	1	100%
5524	1	1	1	1	1	1	1	1	1	1	100%
5525	1	1	1	1	1	1	1	1	1	1	100%
5526	1	1	1	1	1	1	1	1	1	1	100%
5527	1	1	1	1	1	1	1	1	1	1	100%
5528	1	1	1	1	1	1	1	1	1	1	100%
5529(FH)	1	1	1	1	1	1	1	1	1	1	100%
40 MHz Detection Bandwidth = Fh - Fl = 5529MHz - 5491MHz = 38MHz											
EUT 99% Bandwidth = 36.506MHz											

80 MHz Signal Bandwidth											
EUT Frequency = 5290MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5251(FL)	1	1	1	1	1	1	1	1	1	1	100%
5252	1	1	1	1	1	1	1	1	1	1	100%
5253	1	1	1	1	1	1	1	1	1	1	100%
5254	1	1	1	1	1	1	1	1	1	1	100%
5255	1	1	1	1	1	1	1	1	1	1	100%
5256	1	1	1	1	1	1	1	1	1	1	100%
5257	1	1	1	1	1	1	1	1	1	1	100%
5258	1	1	1	1	1	1	1	1	1	1	100%
5259	1	1	1	1	1	1	1	1	1	1	100%
5260	1	1	1	1	1	1	1	1	1	1	100%
5261	1	1	1	1	1	1	1	1	1	1	100%
5262	1	1	1	1	1	1	1	1	1	1	100%
5263	1	1	1	1	1	1	1	1	1	1	100%
5264	1	1	1	1	1	1	1	1	1	1	100%
5265	1	1	1	1	1	1	1	1	1	1	100%
5266	1	1	1	1	1	1	1	1	1	1	100%
5267	1	1	1	1	1	1	1	1	1	1	100%
5268	1	1	1	1	1	1	1	1	1	1	100%
5269	1	1	1	1	1	1	1	1	1	1	100%
5270	1	1	1	1	1	1	1	1	1	1	100%
5271	1	1	1	1	1	1	1	1	1	1	100%
5272	1	1	1	1	1	1	1	1	1	1	100%
5273	1	1	1	1	1	1	1	1	1	1	100%
5274	1	1	1	1	1	1	1	1	1	1	100%
5275	1	1	1	1	1	1	1	1	1	1	100%
5276	1	1	1	1	1	1	1	1	1	1	100%

80 MHz Signal Bandwidth											
EUT Frequency = 5290MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5277	1	1	1	1	1	1	1	1	1	1	100%
5278	1	1	1	1	1	1	1	1	1	1	100%
5279	1	1	1	1	1	1	1	1	1	1	100%
5280	1	1	1	1	1	1	1	1	1	1	100%
5281	1	1	1	1	1	1	1	1	1	1	100%
5282	1	1	1	1	1	1	1	1	1	1	100%
5283	1	1	1	1	1	1	1	1	1	1	100%
5284	1	1	1	1	1	1	1	1	1	1	100%
5285	1	1	1	1	1	1	1	1	1	1	100%
5286	1	1	1	1	1	1	1	1	1	1	100%
5287	1	1	1	1	1	1	1	1	1	1	100%
5288	1	1	1	1	1	1	1	1	1	1	100%
5289	1	1	1	1	1	1	1	1	1	1	100%
5290	1	1	1	1	1	1	1	1	1	1	100%
5291	1	1	1	1	1	1	1	1	1	1	100%
5292	1	1	1	1	1	1	1	1	1	1	100%
5293	1	1	1	1	1	1	1	1	1	1	100%
5294	1	1	1	1	1	1	1	1	1	1	100%
5295	1	1	1	1	1	1	1	1	1	1	100%
5296	1	1	1	1	1	1	1	1	1	1	100%
5297	1	1	1	1	1	1	1	1	1	1	100%
5298	1	1	1	1	1	1	1	1	1	1	100%
5299	1	1	1	1	1	1	1	1	1	1	100%
5300	1	1	1	1	1	1	1	1	1	1	100%
5301	1	1	1	1	1	1	1	1	1	1	100%
5302	1	1	1	1	1	1	1	1	1	1	100%
5303	1	1	1	1	1	1	1	1	1	1	100%
5304	1	1	1	1	1	1	1	1	1	1	100%
5305	1	1	1	1	1	1	1	1	1	1	100%
5306	1	1	1	1	1	1	1	1	1	1	100%

80 MHz Signal Bandwidth											
EUT Frequency = 5290MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5307	1	1	1	1	1	1	1	1	1	1	100%
5308	1	1	1	1	1	1	1	1	1	1	100%
5309	1	1	1	1	1	1	1	1	1	1	100%
5310	1	1	1	1	1	1	1	1	1	1	100%
5311	1	1	1	1	1	1	1	1	1	1	100%
5312	1	1	1	1	1	1	1	1	1	1	100%
5313	1	1	1	1	1	1	1	1	1	1	100%
5314	1	1	1	1	1	1	1	1	1	1	100%
5315	1	1	1	1	1	1	1	1	1	1	100%
5316	1	1	1	1	1	1	1	1	1	1	100%
5317	1	1	1	1	1	1	1	1	1	1	100%
5318	1	1	1	1	1	1	1	1	1	1	100%
5319	1	1	1	1	1	1	1	1	1	1	100%
5320	1	1	1	1	1	1	1	1	1	1	100%
5321	1	1	1	1	1	1	1	1	1	1	100%
5322	1	1	1	1	1	1	1	1	1	1	100%
5323	1	1	1	1	1	1	1	1	1	1	100%
5324	1	1	1	1	1	1	1	1	1	1	100%
5325	1	1	1	1	1	1	1	1	1	1	100%
5326	1	1	1	1	1	1	1	1	1	1	100%
5327	1	1	1	1	1	1	1	1	1	1	100%
5328	1	1	1	1	1	1	1	1	1	1	100%
5329(FH)	1	1	1	1	1	1	1	1	1	1	100%
80 MHz Detection Bandwidth = Fh - Fl = 5329MHz - 5251MHz = 78MHz											
EUT 99% Bandwidth = 76.03MHz											

80 MHz Signal Bandwidth											
EUT Frequency = 5530MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5491(FL)	1	1	1	1	1	1	1	1	1	1	100%
5492	1	1	1	1	1	1	1	1	1	1	100%
5493	1	1	1	1	1	1	1	1	1	1	100%
5494	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5496	1	1	1	1	1	1	1	1	1	1	100%
5497	1	1	1	1	1	1	1	1	1	1	100%
5498	1	1	1	1	1	1	1	1	1	1	100%
5499	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5501	1	1	1	1	1	1	1	1	1	1	100%
5502	1	1	1	1	1	1	1	1	1	1	100%
5503	1	1	1	1	1	1	1	1	1	1	100%
5504	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5506	1	1	1	1	1	1	1	1	1	1	100%
5507	1	1	1	1	1	1	1	1	1	1	100%
5508	1	1	1	1	1	1	1	1	1	1	100%
5509	1	1	1	1	1	1	1	1	1	1	100%
5510	1	1	1	1	1	1	1	1	1	1	100%
5511	1	1	1	1	1	1	1	1	1	1	100%
5512	1	1	1	1	1	1	1	1	1	1	100%
5513	1	1	1	1	1	1	1	1	1	1	100%
5514	1	1	1	1	1	1	1	1	1	1	100%
5515	1	1	1	1	1	1	1	1	1	1	100%
5516	1	1	1	1	1	1	1	1	1	1	100%

80 MHz Signal Bandwidth											
EUT Frequency = 5530MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5517	1	1	1	1	1	1	1	1	1	1	100%
5518	1	1	1	1	1	1	1	1	1	1	100%
5519	1	1	1	1	1	1	1	1	1	1	100%
5520	1	1	1	1	1	1	1	1	1	1	100%
5521	1	1	1	1	1	1	1	1	1	1	100%
5522	1	1	1	1	1	1	1	1	1	1	100%
5523	1	1	1	1	1	1	1	1	1	1	100%
5524	1	1	1	1	1	1	1	1	1	1	100%
5525	1	1	1	1	1	1	1	1	1	1	100%
5526	1	1	1	1	1	1	1	1	1	1	100%
5527	1	1	1	1	1	1	1	1	1	1	100%
5528	1	1	1	1	1	1	1	1	1	1	100%
5529	1	1	1	1	1	1	1	1	1	1	100%
5530	1	1	1	1	1	1	1	1	1	1	100%
5531	1	1	1	1	1	1	1	1	1	1	100%
5532	1	1	1	1	1	1	1	1	1	1	100%
5533	1	1	1	1	1	1	1	1	1	1	100%
5534	1	1	1	1	1	1	1	1	1	1	100%
5535	1	1	1	1	1	1	1	1	1	1	100%
5536	1	1	1	1	1	1	1	1	1	1	100%
5537	1	1	1	1	1	1	1	1	1	1	100%
5538	1	1	1	1	1	1	1	1	1	1	100%
5539	1	1	1	1	1	1	1	1	1	1	100%
5540	1	1	1	1	1	1	1	1	1	1	100%
5541	1	1	1	1	1	1	1	1	1	1	100%
5542	1	1	1	1	1	1	1	1	1	1	100%
5543	1	1	1	1	1	1	1	1	1	1	100%
5544	1	1	1	1	1	1	1	1	1	1	100%
5545	1	1	1	1	1	1	1	1	1	1	100%
5546	1	1	1	1	1	1	1	1	1	1	100%

80 MHz Signal Bandwidth											
EUT Frequency = 5290MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										
	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5547	1	1	1	1	1	1	1	1	1	1	100%
5548	1	1	1	1	1	1	1	1	1	1	100%
5549	1	1	1	1	1	1	1	1	1	1	100%
5550	1	1	1	1	1	1	1	1	1	1	100%
5551	1	1	1	1	1	1	1	1	1	1	100%
5552	1	1	1	1	1	1	1	1	1	1	100%
5553	1	1	1	1	1	1	1	1	1	1	100%
5554	1	1	1	1	1	1	1	1	1	1	100%
5555	1	1	1	1	1	1	1	1	1	1	100%
5556	1	1	1	1	1	1	1	1	1	1	100%
5557	1	1	1	1	1	1	1	1	1	1	100%
5558	1	1	1	1	1	1	1	1	1	1	100%
5559	1	1	1	1	1	1	1	1	1	1	100%
5560	1	1	1	1	1	1	1	1	1	1	100%
5561	1	1	1	1	1	1	1	1	1	1	100%
5562	1	1	1	1	1	1	1	1	1	1	100%
5563	1	1	1	1	1	1	1	1	1	1	100%
5564	1	1	1	1	1	1	1	1	1	1	100%
5565	1	1	1	1	1	1	1	1	1	1	100%
5566	1	1	1	1	1	1	1	1	1	1	100%
5567	1	1	1	1	1	1	1	1	1	1	100%
5568	1	1	1	1	1	1	1	1	1	1	100%
5569(FH)	1	1	1	1	1	1	1	1	1	1	100%
80 MHz Detection Bandwidth = Fh - Fl = 5569MHz - 5492MHz = 77MHz											
EUT 99% Bandwidth = 76.622MHz											

11.9.Statistical Performance Check

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

11.9.1. **Test Result (For 802.11ac VHT20, Band 2)**

Type 1 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	100%

Type 2 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	100%

Type 3 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	100%

Type 4 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	100%

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is as follows: $\frac{P_d1+P_d2+P_d3+P_d4}{4}$ =

(100%+100%+100%+100%)/4 = 100% (>80%)

Type 5 Radar Statistical Performance		
Trial Number	1=Detection Blank=No Detection	
1	1	
2	1	
3	1	
4	1	
5	1	
6	1	
7	1	
8	1	
9	1	
10	1	
11	0	
12	0	
13	1	
14	1	
15	0	
16	1	
17	0	
18	1	
19	1	
20	1	
21	1	
22	1	
23	1	
24	1	
25	1	
26	1	
27	1	
28	1	
29	1	
30	1	
Detection Percentage	Limit >80%	87%

See the type 5 Radar Characteristics at the Section 13.8.7 of this report

Type 6 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

11.9.2. **Test Result (For 802.11ac VHT20, Band 3)**

Type 1 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	100%

Type 2 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	100%

Type 3 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	100%

Type 4 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	100%

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is as follows: $\frac{P_d1+P_d2+P_d3+P_d4}{4}$ =

(100%+100%+100%+100%)/4 = 100% (>80%)

Type 5 Radar Statistical Performance		
Trial Number	1=Detection Blank=No Detection	
1	1	
2	1	
3	1	
4	1	
5	1	
6	1	
7	1	
8	1	
9	1	
10	1	
11	1	
12	1	
13	1	
14	1	
15	1	
16	1	
17	1	
18	1	
19	1	
20	1	
21	1	
22	1	
23	1	
24	1	
25	1	
26	1	
27	1	
28	1	
29	1	
30	1	
Detection Percentage	Limit >80%	100%

See the type 5 Radar Characteristics at the Section 13.8.7 of this report

Type 6 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

11.9.3. **Test Result (For 802.11ac VHT40, Band 2)**

Type 1 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	100%

Type 2 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	100%

Type 3 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	100%

Type 4 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	100%

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is as follows: $\frac{P_d1+P_d2+P_d3+P_d4}{4}$ =

(100%+100%+100%+100%)/4 = 100% (>80%)

Type 5 Radar Statistical Performance		
Trial Number	1=Detection Blank=No Detection	
1	1	
2	1	
3	1	
4	1	
5	1	
6	1	
7	1	
8	1	
9	1	
10	1	
11	1	
12	1	
13	1	
14	1	
15	1	
16	1	
17	1	
18	1	
19	1	
20	1	
21	1	
22	1	
23	1	
24	1	
25	1	
26	1	
27	1	
28	1	
29	1	
30	1	
Detection Percentage	Limit >80%	100%

See the type 5 Radar Characteristics at the Section 13.8.7 of this report

Type 6 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

11.9.4. **Test Result (For 802.11ac VHT40, Band 3)**

Type 1 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	100%

Type 2 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	100%

Type 3 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	100%

Type 4 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	100%

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is as follows: $\frac{P_d1+P_d2+P_d3+P_d4}{4}$ =

(100%+100%+100%+100%)/4 =100% (>80%)

Type 5 Radar Statistical Performance		
Trial Number	1=Detection Blank=No Detection	
1	1	
2	1	
3	1	
4	1	
5	1	
6	1	
7	1	
8	1	
9	1	
10	1	
11	1	
12	1	
13	1	
14	1	
15	1	
16	1	
17	1	
18	1	
19	1	
20	1	
21	1	
22	1	
23	1	
24	1	
25	1	
26	1	
27	1	
28	1	
29	1	
30	1	
Detection Percentage	Limit >80%	100%

See the type 5 Radar Characteristics at the Section 13.8.7 of this report

Type 6 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

11.9.5. **Test Result (For 802.11ac VHT80, Band 2)**

Type 1 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	100%

Type 2 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	100%

Type 3 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	100%

Type 4 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	100%

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is as follows: $\frac{P_d1+P_d2+P_d3+P_d4}{4}$ =

(100%+100%+100%+100%)/4 = 100% (>80%)

Type 5 Radar Statistical Performance		
Trial Number	1=Detection Blank=No Detection	
1	1	
2	1	
3	1	
4	1	
5	1	
6	1	
7	1	
8	1	
9	1	
10	1	
11	1	
12	1	
13	1	
14	1	
15	1	
16	1	
17	1	
18	1	
19	1	
20	1	
21	1	
22	1	
23	1	
24	1	
25	1	
26	1	
27	1	
28	1	
29	1	
30	1	
Detection Percentage	Limit >80%	100%

See the type 5 Radar Characteristics at the Section 13.8.7 of this report

Type 6 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

11.9.6. **Test Result (For 802.11ac VHT80, Band 3)**

Type 1 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	100%

Type 2 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	100%

Type 3 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	100%

Type 4 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	100%

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is as follows: $\frac{P_d1+P_d2+P_d3+P_d4}{4}$ =

(100%+100%+100%+100%)/4 = 100% (>80%)

Type 5 Radar Statistical Performance		
Trial Number	1=Detection Blank=No Detection	
1	1	
2	1	
3	1	
4	1	
5	1	
6	1	
7	1	
8	1	
9	1	
10	1	
11	1	
12	1	
13	1	
14	1	
15	1	
16	1	
17	1	
18	1	
19	1	
20	1	
21	1	
22	1	
23	1	
24	1	
25	1	
26	1	
27	1	
28	1	
29	1	
30	1	
Detection Percentage	Limit >80%	100%

See the type 5 Radar Characteristics at the Section 13.8.7 of this report

Type 6 Radar Statistical Performance					
Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

11.9.7. **Test Result (Type 5 Radar Statistical Performance)**

Trial Number 1							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	395530.0	68.4	13	2	1587.0	1114.0	-
2	588564.0	76.7	13	2	2000.0	1155.0	-
3	783794.0	53.2	13	1	1147.0	-	-
4	177933.0	85.7	13	3	1433.0	1695.0	1394.0
5	370624.0	94.3	13	3	1670.0	1426.0	1935.0
6	564893.0	77.6	13	2	1294.0	1671.0	-
7	759583.0	65.7	13	1	1512.0	-	-
8	154262.0	93.5	13	3	1444.0	1130.0	1468.0
9	395530.0	68.4	13	2	1587.0	1114.0	-
10	588564.0	76.7	13	2	2000.0	1155.0	-
11	783794.0	53.2	13	1	1147.0	-	-
12	177933.0	85.7	13	3	1433.0	1695.0	1394.0
13	370624.0	94.3	13	3	1670.0	1426.0	1935.0
14	564893.0	77.6	13	2	1294.0	1671.0	-
15	759583.0	65.7	13	1	1512.0	-	-

Trial Number 2							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	653020.0	75.0	5	2	1880.0	1527.0	-
2	1015643.0	99.4	5	3	1401.0	1262.0	1257.0
3	1379398.0	67.4	5	2	1531.0	1403.0	-
4	245489.0	73.6	5	2	1449.0	1041.0	-
5	609113.0	65.9	5	1	1432.0	-	-
6	970852.0	83.8	5	3	1356.0	1292.0	1419.0
7	1335913.0	65.5	5	1	1543.0	-	-
8	200406.0	98.6	5	3	1548.0	1796.0	1728.0

Trial Number 3							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	409565.0	73.8	9	2	1806.0	1538.0	-
2	673692.0	69.5	9	2	1117.0	1649.0	-
3	938562.0	51.9	9	1	1651.0	-	-
4	113209.0	84.6	9	3	1976.0	1032.0	1271.0
5	376726.0	95.4	9	3	1060.0	1903.0	1388.0
6	641212.0	68.0	9	2	1368.0	1351.0	-
7	903714.0	89.6	9	3	1338.0	1514.0	1573.0
8	80863.0	81.9	9	2	1022.0	1689.0	-
9	344067.0	88.3	9	3	1810.0	1330.0	1838.0
10	609331.0	53.7	9	1	1597.0	-	-
11	871542.0	91.3	9	3	1961.0	1106.0	1001.0

Trial Number 4							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	26541.0	68.1	19	2	1339.0	1355.0	-
2	171821.0	58.7	19	1	1251.0	-	-
3	316229.0	75.3	19	2	1136.0	1640.0	-
4	461864.0	56.4	19	1	1753.0	-	-
5	8677.0	99.7	19	3	1196.0	1708.0	1159.0
6	153995.0	57.7	19	1	1013.0	-	-
7	299238.0	59.5	19	1	1072.0	-	-
8	443177.0	80.0	19	2	1482.0	1369.0	-
9	587671.0	82.0	19	2	1993.0	1197.0	-
10	135674.0	82.8	19	2	1883.0	1005.0	-
11	279928.0	88.0	19	3	1061.0	1928.0	1101.0
12	424279.0	93.2	19	3	1207.0	1907.0	1223.0
13	570132.0	70.4	19	2	1526.0	1360.0	-
14	117439.0	95.3	19	3	1171.0	1955.0	1775.0
15	262502.0	81.9	19	2	1690.0	1545.0	-
16	406573.0	98.5	19	3	1975.0	1169.0	1062.0
17	553328.0	65.0	19	1	1767.0	-	-
18	99799.0	85.4	19	3	1011.0	1637.0	1425.0
19	244095.0	91.6	19	3	1878.0	1445.0	1325.0
20	390012.0	67.3	19	2	1091.0	1218.0	-

Trial Number 5							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	629614.0	67.9	16	2	1320.0	1133.0	-
2	96856.0	62.3	16	1	1957.0	-	-
3	267719.0	53.3	16	1	1592.0	-	-
4	436784.0	90.0	16	3	1900.0	1153.0	1346.0
5	608289.0	77.1	16	2	1166.0	1646.0	-
6	75610.0	83.9	16	3	1278.0	1232.0	1459.0
7	245638.0	89.1	16	3	1240.0	1384.0	1939.0
8	416355.0	81.8	16	2	1833.0	1676.0	-
9	588736.0	50.3	16	1	1075.0	-	-
10	54571.0	87.1	16	3	1116.0	1996.0	1756.0
11	225175.0	71.3	16	2	1225.0	1815.0	-
12	394825.0	97.5	16	3	1884.0	1465.0	1132.0
13	565361.0	90.6	16	3	1561.0	1040.0	1354.0
14	33643.0	86.3	16	3	1596.0	1183.0	1792.0
15	203957.0	97.6	16	3	1365.0	1073.0	1361.0
16	373812.0	84.7	16	3	1021.0	1718.0	1854.0
17	544060.0	99.7	16	3	1150.0	1244.0	1988.0

Trial Number 6							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	15438.0	92.9	12	3	1085.0	1564.0	1407.0
2	222486.0	67.7	12	2	1744.0	1747.0	-
3	430731.0	65.8	12	1	1092.0	-	-
4	637784.0	56.3	12	1	1851.0	-	-
5	845342.0	53.7	12	1	1727.0	-	-
6	196720.0	83.5	12	3	1679.0	1930.0	1025.0
7	404955.0	65.8	12	1	1519.0	-	-
8	610711.0	85.9	12	3	1134.0	1034.0	1808.0
9	818057.0	76.3	12	2	1606.0	1926.0	-
10	171459.0	81.5	12	2	1891.0	1714.0	-
11	377969.0	89.4	12	3	1310.0	1594.0	1827.0
12	586875.0	63.4	12	1	1568.0	-	-
13	792834.0	69.6	12	2	1307.0	1925.0	-
14	146044.0	74.5	12	2	1264.0	1846.0	-

Trial Number 7							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	329022.0	96.6	13	3	1182.0	1609.0	1581.0
2	521718.0	96.7	13	3	1829.0	1799.0	1154.0
3	714222.0	86.5	13	3	1923.0	1396.0	1865.0
4	112450.0	73.3	13	2	1908.0	1318.0	-
5	306283.0	55.8	13	1	1688.0	-	-
6	500239.0	55.4	13	1	1145.0	-	-
7	690932.0	85.3	13	3	1336.0	1504.0	1820.0
8	88645.0	79.4	13	2	1344.0	1893.0	-
9	282508.0	65.7	13	1	1476.0	-	-
10	475842.0	68.6	13	2	1008.0	1028.0	-
11	667887.0	77.7	13	2	1972.0	1835.0	-
12	64845.0	79.6	13	2	1882.0	1331.0	-
13	257755.0	94.9	13	3	1830.0	1070.0	1349.0
14	452335.0	61.4	13	1	1451.0	-	-
15	643395.0	90.6	13	3	1233.0	1562.0	1887.0

Trial Number 8							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	51446.0	52.6	10	1	1210.0	-	-
2	292696.0	84.1	10	3	1314.0	1725.0	1529.0
3	533989.0	97.7	10	3	1139.0	1868.0	1805.0
4	775564.0	97.3	10	3	1341.0	1446.0	1755.0
5	21542.0	98.8	10	3	1544.0	1386.0	1302.0
6	263385.0	72.2	10	2	1771.0	1184.0	-
7	505581.0	67.6	10	2	1175.0	1027.0	-
8	747058.0	75.7	10	2	1026.0	1871.0	-
9	989976.0	60.9	10	1	1798.0	-	-
10	234024.0	64.2	10	1	1138.0	-	-
11	475207.0	78.8	10	2	1784.0	1604.0	-
12	715825.0	87.5	10	3	1511.0	1712.0	1683.0

Trial Number 9							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	823112.0	54.1	13	1	1415.0	-	-
2	174965.0	50.7	13	1	1221.0	-	-
3	382216.0	52.3	13	1	1974.0	-	-
4	587395.0	99.8	13	3	1558.0	1696.0	1949.0
5	796897.0	68.4	13	2	1014.0	1099.0	-
6	149042.0	80.8	13	2	1736.0	1505.0	-
7	356750.0	62.5	13	1	1778.0	-	-
8	563824.0	74.8	13	2	1149.0	1204.0	-
9	772314.0	50.8	13	1	1049.0	-	-
10	123796.0	54.0	13	1	1417.0	-	-
11	331215.0	63.0	13	1	1730.0	-	-
12	537402.0	91.8	13	3	1143.0	1270.0	1347.0
13	744805.0	79.3	13	2	1274.0	1992.0	-
14	98172.0	64.3	13	1	1937.0	-	-

Trial Number 10							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	535615.0	63.4	6	1	1043.0	-	-
2	898668.0	52.0	6	1	1863.0	-	-
3	1259235.0	97.2	6	3	1973.0	1605.0	1583.0
4	127106.0	78.7	6	2	1466.0	1743.0	-
5	490358.0	74.2	6	2	1280.0	1219.0	-
6	852409.0	88.7	6	3	1293.0	1934.0	1273.0
7	1217152.0	54.3	6	1	1991.0	-	-
8	82296.0	95.4	6	3	1580.0	1555.0	1791.0

Trial Number 11							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	209249.0	73.7	16	2	1208.0	1497.0	-
2	378386.0	97.4	16	3	1942.0	1754.0	1613.0
3	548411.0	91.7	16	3	1999.0	1702.0	1462.0
4	17733.0	66.2	16	1	1393.0	-	-
5	187952.0	70.8	16	2	1968.0	1821.0	-
6	359277.0	52.3	16	1	1740.0	-	-
7	528886.0	78.9	16	2	1308.0	1984.0	-
8	700166.0	70.9	16	2	1050.0	1358.0	-
9	167197.0	75.6	16	2	1437.0	1430.0	-
10	338262.0	59.1	16	1	1697.0	-	-
11	508324.0	77.0	16	2	1397.0	1304.0	-
12	678689.0	67.9	16	2	1803.0	1083.0	-
13	146031.0	81.2	16	2	1720.0	1932.0	-
14	316923.0	78.7	16	2	1247.0	1121.0	-
15	488056.0	63.3	16	1	1634.0	-	-
16	657326.0	68.9	16	2	1849.0	1423.0	-
17	125509.0	59.3	16	1	1093.0	-	-

Trial Number 12							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	263736.0	98.9	19	3	1381.0	1680.0	1488.0
2	416459.0	82.3	19	2	1716.0	1855.0	-
3	567902.0	86.7	19	3	1211.0	1400.0	1919.0
4	92979.0	89.7	19	3	1861.0	1068.0	1282.0
5	245155.0	98.6	19	3	1507.0	1194.0	1461.0
6	397609.0	71.1	19	2	1921.0	1789.0	-
7	551431.0	55.9	19	1	1947.0	-	-
8	74413.0	67.9	19	2	1350.0	1372.0	-
9	226559.0	84.4	19	3	1203.0	1107.0	1443.0
10	380056.0	58.8	19	1	1715.0	-	-
11	533408.0	65.6	19	1	1017.0	-	-
12	55547.0	78.5	19	2	1911.0	1704.0	-
13	207876.0	82.3	19	2	1845.0	1686.0	-
14	359771.0	90.1	19	3	1938.0	1071.0	1266.0
15	511297.0	90.2	19	3	1989.0	1089.0	1950.0
16	36803.0	83.1	19	2	1943.0	1406.0	-
17	189652.0	58.8	19	1	1742.0	-	-
18	341809.0	77.0	19	2	1187.0	1657.0	-
19	495737.0	55.0	19	1	1012.0	-	-

Trial Number 13							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	22911.0	58.1	13	1	1929.0	-	-
2	216473.0	52.1	13	1	1910.0	-	-
3	410004.0	59.9	13	1	1971.0	-	-
4	603671.0	60.2	13	1	1812.0	-	-
5	794160.0	95.9	13	3	1399.0	1906.0	1608.0
6	192251.0	79.9	13	2	1626.0	1859.0	-
7	385590.0	78.5	13	2	1238.0	1917.0	-
8	579862.0	53.8	13	1	1763.0	-	-
9	773423.0	64.7	13	1	1800.0	-	-
10	168898.0	61.4	13	1	1390.0	-	-
11	361606.0	83.2	13	2	1692.0	1858.0	-
12	553866.0	84.7	13	3	1533.0	1677.0	1638.0
13	747241.0	88.7	13	3	1703.0	1528.0	1058.0
14	144710.0	78.3	13	2	1258.0	1951.0	-
15	337856.0	69.3	13	2	1731.0	1717.0	-

Trial Number 14							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	22911.0	58.1	13	1	1929.0	-	-
2	216473.0	52.1	13	1	1910.0	-	-
3	410004.0	59.9	13	1	1971.0	-	-
4	603671.0	60.2	13	1	1812.0	-	-
5	794160.0	95.9	13	3	1399.0	1906.0	1608.0
6	192251.0	79.9	13	2	1626.0	1859.0	-
7	385590.0	78.5	13	2	1238.0	1917.0	-
8	579862.0	53.8	13	1	1763.0	-	-
9	773423.0	64.7	13	1	1800.0	-	-
10	168898.0	61.4	13	1	1390.0	-	-
11	361606.0	83.2	13	2	1692.0	1858.0	-
12	553866.0	84.7	13	3	1533.0	1677.0	1638.0

Trial Number 15							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	361323.0	93.3	18	3	1983.0	1912.0	1535.0
2	515261.0	69.1	18	2	1102.0	1794.0	-
3	39025.0	86.9	18	3	1044.0	1152.0	1148.0
4	190900.0	84.9	18	3	1894.0	1948.0	1118.0
5	343941.0	72.3	18	2	1094.0	1916.0	-
6	497624.0	51.7	18	1	1447.0	-	-
7	20319.0	58.3	18	1	1429.0	-	-
8	172999.0	60.8	18	1	1979.0	-	-
9	325872.0	57.1	18	1	1641.0	-	-
10	475841.0	88.9	18	3	1886.0	1964.0	1489.0
11	1489.0	72.0	18	2	1909.0	1297.0	-
12	153647.0	90.9	18	3	1261.0	1566.0	1370.0
13	307096.0	59.8	18	1	1552.0	-	-
14	458804.0	70.0	18	2	1759.0	1291.0	-
15	610798.0	67.2	18	2	1625.0	1881.0	-
16	134759.0	91.2	18	3	1382.0	1832.0	1661.0
17	288306.0	56.5	18	1	1483.0	-	-
18	441296.0	51.2	18	1	1237.0	-	-
19	592780.0	74.1	18	2	1471.0	1245.0	-

Trial Number 16							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	158286.0	76.9	12	2	1110.0	1140.0	-
2	366024.0	50.2	12	1	1316.0	-	-
3	573452.0	62.9	12	1	1520.0	-	-
4	780619.0	64.7	12	1	1902.0	-	-
5	132455.0	83.8	12	3	1410.0	1097.0	1621.0
6	340207.0	65.4	12	1	1944.0	-	-
7	548208.0	53.2	12	1	1024.0	-	-
8	755333.0	51.7	12	1	1603.0	-	-
9	107117.0	78.7	12	2	1804.0	1168.0	-
10	314500.0	72.4	12	2	1030.0	1343.0	-
11	522447.0	53.8	12	1	1327.0	-	-
12	728517.0	73.6	12	2	1524.0	1553.0	-
13	81611.0	66.7	12	2	1722.0	1122.0	-
14	288948.0	82.5	12	2	1404.0	1019.0	-

Trial Number 17							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	345766.0	87.6	20	3	1565.0	1055.0	1840.0
2	490019.0	85.2	20	3	1735.0	1541.0	1408.0
3	39073.0	84.8	20	3	1534.0	1889.0	1463.0
4	183923.0	77.9	20	2	1749.0	1460.0	-
5	328777.0	76.5	20	2	1518.0	1485.0	-
6	474728.0	60.9	20	1	1540.0	-	-
7	21394.0	83.0	20	2	1080.0	1010.0	-
8	165992.0	80.4	20	2	1824.0	1752.0	-
9	310973.0	67.5	20	2	1764.0	1181.0	-
10	456884.0	62.1	20	1	1495.0	-	-
11	3515.0	86.4	20	3	1773.0	1966.0	1263.0
12	147928.0	84.3	20	3	1593.0	1188.0	1788.0
13	293225.0	76.9	20	2	1226.0	1537.0	-
14	436922.0	95.8	20	3	1192.0	1298.0	1844.0
15	584015.0	55.2	20	1	1644.0	-	-
16	130832.0	59.0	20	1	1402.0	-	-
17	274684.0	94.5	20	3	1296.0	1700.0	1283.0
18	418579.0	91.9	20	3	1970.0	1978.0	1165.0
19	563464.0	85.2	20	3	1732.0	1551.0	1189.0
20	112787.0	69.5	20	2	1038.0	1224.0	-

Trial Number 18							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	429224.0	86.4	10	3	1259.0	1918.0	1455.0
2	670241.0	92.2	10	3	1598.0	1719.0	1895.0
3	912880.0	80.4	10	2	1816.0	1899.0	-
4	158603.0	54.3	10	1	1335.0	-	-
5	400824.0	53.1	10	1	1303.0	-	-
6	641915.0	69.4	10	2	1503.0	1546.0	-
7	883823.0	69.1	10	2	1279.0	1639.0	-
8	128373.0	100.0	10	3	1375.0	1438.0	1595.0
9	370379.0	79.6	10	2	1239.0	1705.0	-
10	611194.0	88.4	10	3	1374.0	1579.0	1623.0
11	855665.0	53.3	10	1	1016.0	-	-
12	98897.0	65.3	10	1	1709.0	-	-

Trial Number 19							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	292143.0	55.3	12	1	1920.0	-	-
2	499633.0	58.3	12	1	1797.0	-	-
3	706377.0	72.3	12	2	1610.0	1039.0	-
4	58989.0	84.8	12	3	1131.0	1761.0	1721.0
5	266161.0	82.5	12	2	1875.0	1431.0	-
6	474469.0	63.3	12	1	1095.0	-	-
7	680544.0	80.0	12	2	1119.0	1913.0	-
8	33519.0	90.3	12	3	1660.0	1853.0	1123.0
9	240319.0	91.1	12	3	1539.0	1783.0	1172.0
10	447400.0	96.6	12	3	1525.0	1036.0	1385.0
11	654516.0	82.7	12	2	1710.0	1990.0	-
12	8083.0	50.7	12	1	1234.0	-	-
13	215435.0	78.4	12	2	1047.0	1109.0	-
14	421325.0	99.5	12	3	1299.0	1965.0	1869.0

Trial Number 20							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	733725.0	88.6	10	3	1501.0	1067.0	1927.0
2	977882.0	57.4	10	1	1723.0	-	-
3	221197.0	96.6	10	3	1086.0	1658.0	1324.0
4	462915.0	69.7	10	2	1751.0	1945.0	-
5	705071.0	77.9	10	2	1642.0	1317.0	-
6	947923.0	62.0	10	1	1866.0	-	-
7	191373.0	88.4	10	3	1997.0	1077.0	1366.0
8	432561.0	97.3	10	3	1790.0	1896.0	1367.0
9	674004.0	96.2	10	3	1391.0	1787.0	1672.0
10	915842.0	95.4	10	3	1020.0	1892.0	1414.0
11	162176.0	54.8	10	1	1084.0	-	-
12	403553.0	80.4	10	2	1850.0	1436.0	-

Trial Number 21							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	483470.0	74.7	15	2	1619.0	1611.0	-
2	666072.0	57.1	15	1	1560.0	-	-
3	98810.0	91.9	15	3	1392.0	1475.0	1276.0
4	279914.0	83.1	15	2	1809.0	1772.0	-
5	462536.0	50.7	15	1	1003.0	-	-
6	642324.0	79.2	15	2	1574.0	1600.0	-
7	76831.0	58.7	15	1	1186.0	-	-
8	257785.0	71.0	15	2	1521.0	1567.0	-
9	438554.0	79.0	15	2	1777.0	1960.0	-
10	620397.0	68.5	15	2	1284.0	1428.0	-
11	54310.0	73.5	15	2	1904.0	1352.0	-
12	235506.0	70.5	15	2	1864.0	1115.0	-
13	417036.0	76.6	15	2	1045.0	1300.0	-
14	597974.0	81.2	15	2	1160.0	1675.0	-
15	32086.0	61.8	15	1	1277.0	-	-
16	212751.0	94.9	15	3	1450.0	1206.0	1860.0

Trial Number 22							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	526149.0	78.5	9	2	1653.0	1698.0	-
2	767135.0	89.8	9	3	1174.0	1962.0	1167.0
3	12955.0	59.4	9	1	1982.0	-	-
4	254612.0	79.6	9	2	1633.0	1890.0	-
5	496588.0	76.0	9	2	1112.0	1811.0	-
6	739728.0	53.6	9	1	1144.0	-	-
7	980872.0	80.9	9	2	1220.0	1053.0	-
8	225249.0	61.6	9	1	1724.0	-	-
9	467279.0	53.4	9	1	1901.0	-	-
10	709720.0	59.9	9	1	1379.0	-	-
11	951847.0	60.4	9	1	1453.0	-	-
12	194839.0	91.4	9	3	1768.0	1726.0	1227.0

Trial Number 23							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	261858.0	77.0	20	2	1191.0	1363.0	-
2	407646.0	58.1	20	1	1248.0	-	-
3	552319.0	62.1	20	1	1836.0	-	-
4	99107.0	76.9	20	2	1334.0	1236.0	-
5	243514.0	80.0	20	2	1914.0	1852.0	-
6	389464.0	52.0	20	1	1701.0	-	-
7	531093.0	88.6	20	3	1693.0	1995.0	1905.0
8	81159.0	72.9	20	2	1922.0	1387.0	-
9	225245.0	98.5	20	3	1839.0	1746.0	1389.0
10	371906.0	57.9	20	1	1193.0	-	-
11	514197.0	95.9	20	3	1659.0	1870.0	1066.0
12	63561.0	53.5	20	1	1162.0	-	-
13	207510.0	92.0	20	3	1745.0	1654.0	1458.0
14	353638.0	57.3	20	1	1834.0	-	-
15	497515.0	70.5	20	2	1684.0	1586.0	-
16	45553.0	70.0	20	2	1042.0	1664.0	-
17	189821.0	84.0	20	3	1765.0	1630.0	1176.0
18	335330.0	76.1	20	2	1557.0	1057.0	-
19	478825.0	93.2	20	3	1985.0	1018.0	1340.0
20	27594.0	96.8	20	3	1760.0	1614.0	1817.0

Trial Number 24							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	247117.0	50.1	12	1	1841.0	-	-
2	453362.0	93.5	12	3	1590.0	1081.0	1413.0
3	660875.0	68.8	12	2	1707.0	1577.0	-
4	14140.0	56.3	12	1	1056.0	-	-
5	220734.0	86.0	12	3	1953.0	1108.0	1987.0
6	428367.0	75.2	12	2	1572.0	1536.0	-
7	636681.0	54.4	12	1	1517.0	-	-
8	843157.0	71.1	12	2	1329.0	1243.0	-
9	195585.0	76.2	12	2	1940.0	1770.0	-
10	403231.0	80.2	12	2	1098.0	1209.0	-
11	610202.0	79.7	12	2	1588.0	1214.0	-
12	815229.0	90.9	12	3	1615.0	1862.0	1601.0
13	170267.0	68.7	12	2	1377.0	1441.0	-
14	377306.0	67.4	12	2	1872.0	1313.0	-

Trial Number 25							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	628071.0	94.0	11	3	1643.0	1748.0	1941.0
2	853391.0	70.8	11	2	1177.0	1201.0	-
3	156223.0	56.3	11	1	1006.0	-	-
4	378734.0	96.7	11	3	1230.0	1163.0	1332.0
5	601331.0	90.6	11	3	1217.0	1582.0	1498.0
6	825462.0	74.5	11	2	1569.0	1281.0	-
7	128265.0	92.6	11	3	1065.0	1669.0	1222.0
8	351161.0	89.0	11	3	1493.0	1135.0	1380.0
9	573425.0	96.5	11	3	1607.0	1822.0	1602.0
10	798431.0	70.5	11	2	1141.0	1178.0	-
11	100737.0	94.0	11	3	1009.0	1629.0	1956.0
12	324661.0	55.8	11	1	1290.0	-	-
13	546278.0	87.7	11	3	1435.0	1963.0	1164.0

Trial Number 26							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1253842.0	68.6	5	2	1306.0	1161.0	-
2	119486.0	83.1	5	2	1420.0	1315.0	-
3	482958.0	60.9	5	1	1687.0	-	-
4	845641.0	77.7	5	2	1776.0	1158.0	-
5	1208428.0	77.4	5	2	1793.0	1510.0	-
6	74748.0	66.8	5	2	1576.0	1323.0	-
7	438300.0	63.7	5	1	1333.0	-	-
8	800152.0	91.2	5	3	1409.0	1681.0	1275.0

Trial Number 27							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	545865.0	83.6	16	3	1632.0	1195.0	1000.0
2	14067.0	89.4	16	3	1173.0	1627.0	1656.0
3	184953.0	55.8	16	1	1532.0	-	-
4	353759.0	90.9	16	3	1981.0	1554.0	1998.0
5	526388.0	54.7	16	1	1825.0	-	-
6	694806.0	97.7	16	3	1734.0	1202.0	1250.0
7	163568.0	67.5	16	2	1571.0	1434.0	-
8	333410.0	96.7	16	3	1589.0	1469.0	1268.0
9	504006.0	68.3	16	2	1750.0	1954.0	-
10	675297.0	78.3	16	2	1591.0	1082.0	-
11	142890.0	55.0	16	1	1427.0	-	-
12	312479.0	84.9	16	3	1129.0	1936.0	1199.0
13	482953.0	74.6	16	2	1959.0	1856.0	-
14	655022.0	63.3	16	1	1885.0	-	-
15	121457.0	99.8	16	3	1035.0	1515.0	1120.0
16	292606.0	63.6	16	1	1647.0	-	-
17	461322.0	87.3	16	3	1931.0	1051.0	1831.0

Trial Number 28							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	565136.0	85.6	19	3	1946.0	1078.0	1015.0
2	89970.0	68.6	19	2	1029.0	1780.0	-
3	243121.0	54.2	19	1	1111.0	-	-
4	396034.0	61.2	19	1	1104.0	-	-
5	546225.0	97.1	19	3	1157.0	1969.0	1100.0
6	70998.0	98.3	19	3	1142.0	1699.0	1622.0
7	224093.0	62.4	19	1	1655.0	-	-
8	376127.0	80.2	19	2	1126.0	1769.0	-
9	527806.0	87.5	19	3	1216.0	1448.0	1179.0
10	52247.0	85.8	19	3	1847.0	1348.0	1472.0
11	204582.0	88.1	19	3	1023.0	1124.0	1631.0
12	357941.0	65.3	19	1	1848.0	-	-
13	510977.0	52.5	19	1	1470.0	-	-
14	33698.0	52.3	19	1	1312.0	-	-
15	186023.0	74.1	19	2	1915.0	1200.0	-
16	339327.0	54.9	19	1	1479.0	-	-
17	491053.0	76.2	19	2	1376.0	1502.0	-
18	14858.0	60.4	19	1	1758.0	-	-
19	167387.0	81.5	19	2	1491.0	1103.0	-

Trial Number 29							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	507709.0	50.5	10	1	1857.0	-	-
2	750249.0	55.7	10	1	1246.0	-	-
3	989003.0	85.8	10	3	1774.0	1002.0	1967.0
4	235634.0	76.9	10	2	1125.0	1474.0	-
5	477675.0	75.1	10	2	1254.0	1052.0	-
6	718312.0	92.3	10	3	1180.0	1486.0	1492.0
7	960895.0	78.1	10	2	1301.0	1757.0	-
8	205370.0	92.2	10	3	1898.0	1252.0	1713.0
9	446940.0	89.0	10	3	1260.0	1706.0	1411.0
10	689225.0	70.9	10	2	1578.0	1620.0	-
11	932305.0	63.1	10	1	1782.0	-	-
12	176231.0	55.3	10	1	1522.0	-	-

Trial Number 30							
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	277485.0	83.4	17	3	1454.0	1205.0	1801.0
2	437880.0	97.3	17	3	1319.0	1826.0	1635.0
3	598445.0	90.4	17	3	1079.0	1986.0	1674.0
4	97088.0	91.8	17	3	1563.0	1151.0	1802.0
5	257251.0	98.2	17	3	1876.0	1977.0	1766.0
6	419893.0	59.5	17	1	1952.0	-	-
7	580724.0	80.0	17	2	1253.0	1137.0	-
8	77366.0	86.5	17	3	1054.0	1128.0	1828.0
9	238032.0	91.1	17	3	1105.0	1599.0	1442.0
10	398605.0	93.5	17	3	1867.0	1373.0	1087.0
11	562025.0	60.7	17	1	1033.0	-	-
12	57684.0	67.2	17	2	1288.0	1405.0	-
13	219083.0	61.8	17	1	1585.0	-	-
14	379234.0	79.4	17	2	1933.0	1667.0	-
15	540896.0	81.4	17	2	1096.0	1464.0	-
16	37916.0	65.7	17	1	1496.0	-	-
17	198794.0	76.0	17	2	1733.0	1255.0	-
18	359754.0	81.0	17	2	1326.0	1668.0	-

11.10. Uniform Spreading

The UUT will select channel by random mode and remember this channel when detect radar signal, so that will select unused channel by random mode.

11.10.1. **Test Result of Uniform Spreading**

Not required

11.11. In-Service Monitoring

The In-Service Monitoring is defined as the process by which an RLAN monitors the Operating Channel for the presence of radar signals.

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20Hz channels and the channel center frequency.		

11.11.1. **Test Limit**

Parameter	Value
Channel Move Time	< 10 s (See Note 1)
Channel Closing Transmission Time	< 200 ms+ an aggregate of 60 milliseconds over remaining 10 second period. (See Notes 1 and Notes 2.)
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.	

Limits Clause 4.7.2.2.2

The In-Service Monitoring shall be used to continuously monitor an Operating Channel.

The In-Service-Monitoring shall start immediately after the RLAN has started transmissions on an Operating Channel.

11.11.2. **Test Result of In-Service Monitoring**

Modulation Standard: 802.11ac VHT80, 5260MHz

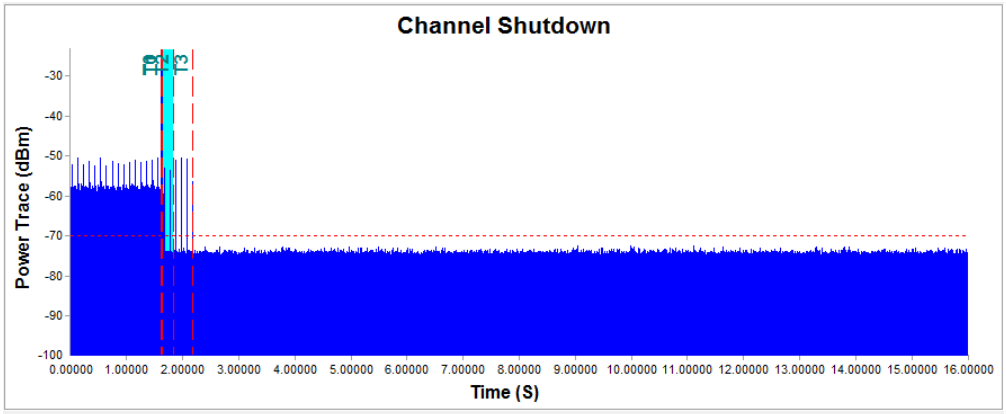

Time Index Info

T0 : 1.6160 S (Radar Injection Start)
T1 : 1.6408 S (Radar Injection Stop)
T2 : 1.8408 S (200msec Interval)
T3 : 2.1751 S (Channel Move Time)

Time Per Bin:0.39999 ms
T2~T3 Bins Over Threshold: = 7 Bins

Channel Move Time: 0.5343866 S
Channel Close Time: 0.0027999 S

Modulation Standard: 802.11ac VHT80, 5500MHz

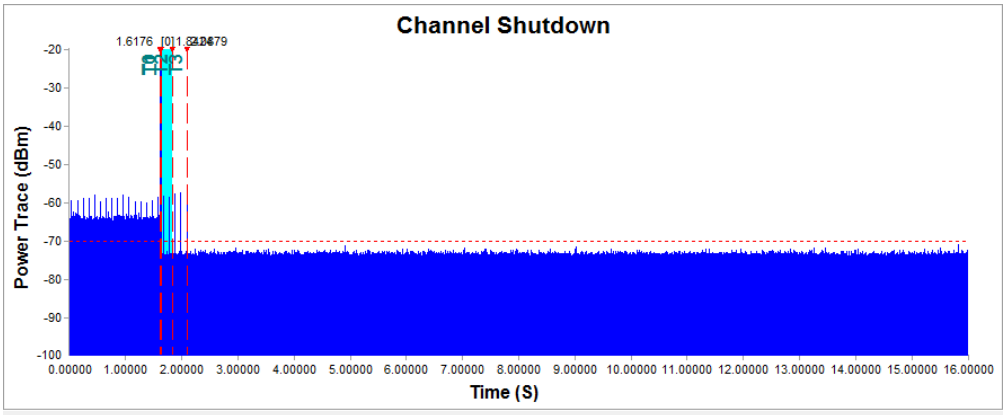

Time Index Info

T0 : 1.6176 S (Radar Injection Start)
T1 : 1.6424 S (Radar Injection Stop)
T2 : 1.8424 S (200msec Interval)
T3 : 2.0879 S (Channel Move Time)

Time Per Bin:0.39999 ms
T2~T3 Bins Over Threshold: = 3 Bins

Channel Move Time: 0.4455889 S
Channel Close Time: 0.0012 S

11.12. Non-Occupancy Period

The Channel Shutdown is defined as the process initiated by the RLAN device immediately after a radar signal has been detected on an Operating Channel.
The master device shall instruct all associated slave devices to stop transmitting on this channel, which they shall do within the Channel Move Time.
Slave devices with a Radar Interference Detection function, shall stop their own transmissions within the Channel Move Time.
The aggregate duration of all transmissions of the RLAN device on this channel during the Channel Move Time shall be limited to the Channel Closing Transmission Time. The aggregate duration of all transmissions shall not include quiet periods in between transmissions.

11.12.1. **Test Limit**

Radar Test Signal	Master (min)	Client (min)
0	> 30	> 30

11.12.2. **Channel Loading**

Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time). This can be done with any appropriate channel BW and modulation type

Modulation Standard: 802.11ac VHT80 Channel 58
Duty Cycle=17.76%

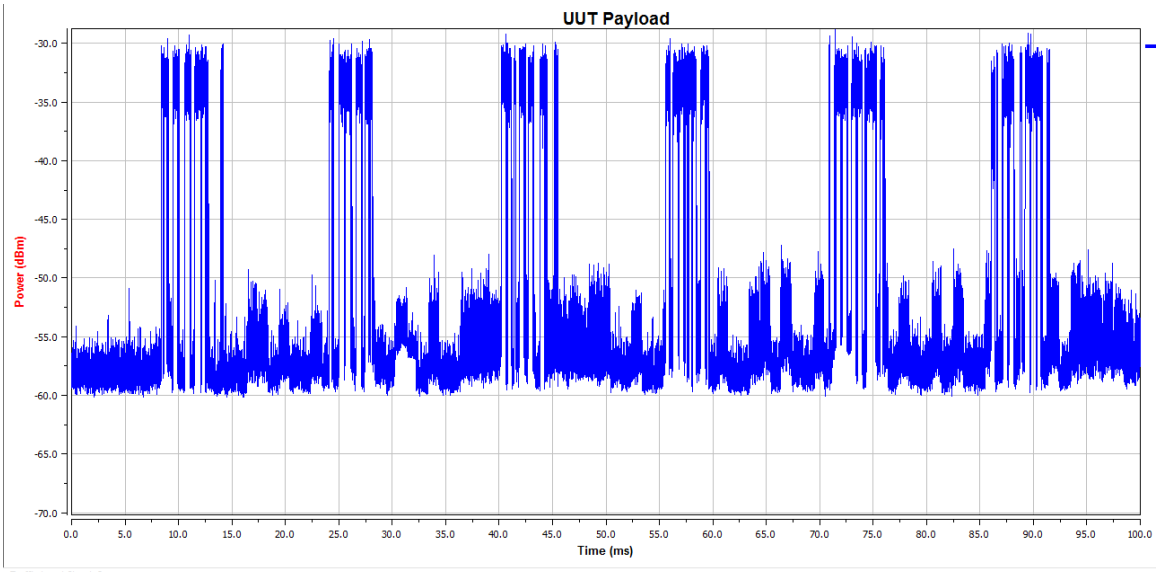

Traffic Load Check Status

Duty Cycle (%) : 17.76

***Please make sure when we want to do the Adaptivity Test, the Duty Cycle in Traffic Load must over then 30%.**

Modulation Standard: 802.11ac VHT80 Channel 106
Duty Cycle=17.11%

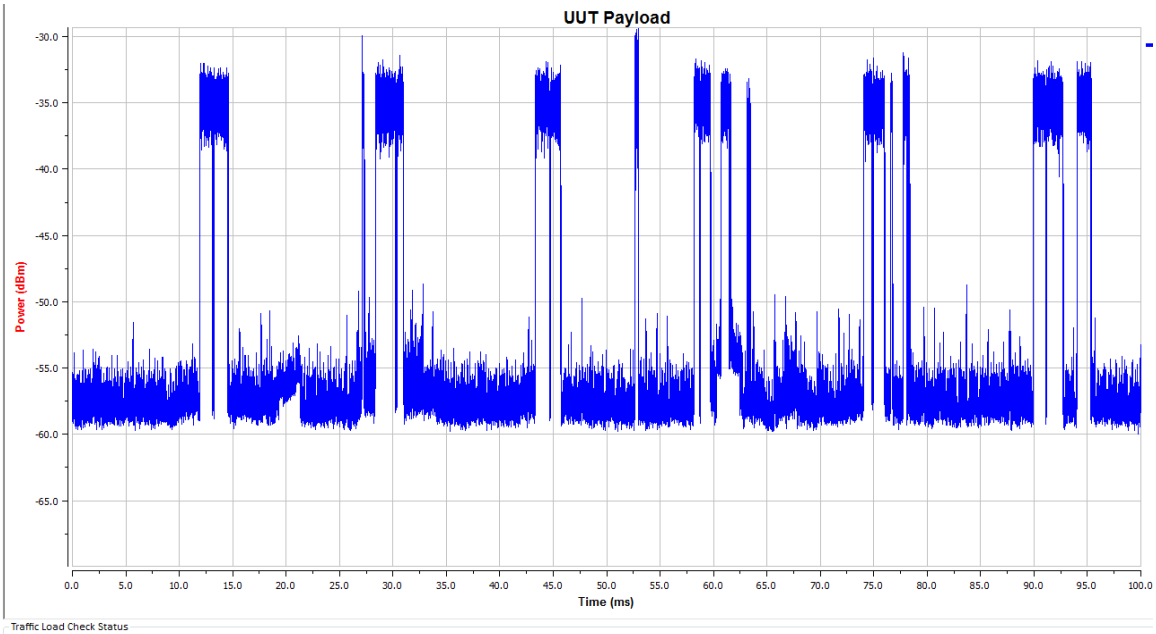

Traffic Load Check Status

Duty Cycle (%) : 17.11

***Please make sure when we want to do the Adaptivity Test, the Duty Cycle in Traffic Load must over then 30%.**

11.12.3. **Test Result of Non-Occupancy Period**

Modulation Standard: 802.11ac VHT80, 5260MHz

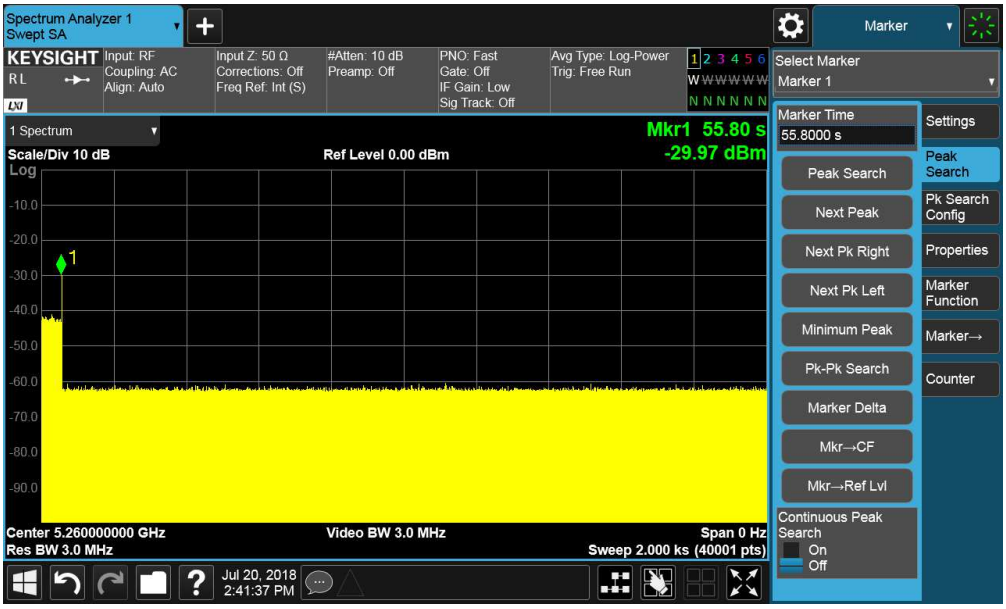

Modulation Standard: 802.11ac VHT80, 5500MHz

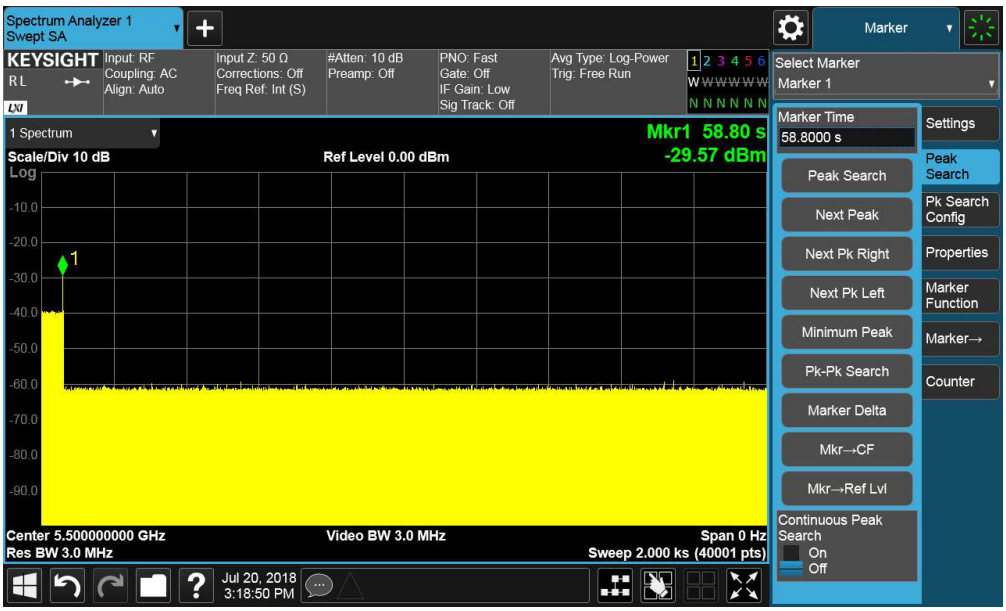

11.13. EUT Setup Photos

12. 電波暴露量之評估

12.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範 5.20 節之(5.20.2)規定，若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure，MPE)以證明其符電波暴露量之要求。限制值如下：

(1) 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3-3.0	614	1.63	*100	6
3-30	1842/f	4.89/f	$*900/f^2$	6
30-300	61.4	0.163	1.0	6
300-1,500	-----	-----	f/300	6
1,500-100,000	-----	-----	5.0	6

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：百萬赫(MHz)。

(2) 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3-3.0	614	1.63	*100	30
3-30	1842/f	4.89/f	$*180/f^2$	30
30-300	27.5	0.073	1.0	30
300-1,500	-----	-----	f/1500	30
1,500-100,000	-----	-----	1.0	30

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：百萬赫(MHz)。

12.2. 電波暴露量之評估結果及數據

Temperature : 22℃ Humidity : 64%

Test Date : Jun. 10, 2018 Test Mode : Non-Beamforming

Modulation Mode	Frequency band (MHz)	Max. Conducted output power (dBm)	Antenna gain (dBi)	Distance (cm)	Power density (mW/cm2)	Limit (mW/cm2)
802.11a	5150-5250	22.95	4.81	20	0.1188	1
802.11a	5250-5350	20.61	4.2	20	0.0602	1
802.11a	5470-5725	20.15	4.83	20	0.0626	1
802.11a	5725-5850	22.83	4.9	20	0.1180	1
802.11an HT20	5150-5250	22.86	4.81	20	0.1164	1
802.11an HT20	5250-5350	21.06	4.2	20	0.0668	1
802.11an HT20	5470-5725	19.67	4.83	20	0.0561	1
802.11an HT20	5725-5850	22.55	4.9	20	0.1106	1
802.11an HT40	5150-5250	22.03	4.81	20	0.0961	1
802.11an HT40	5250-5350	23.32	4.2	20	0.1123	1
802.11an HT40	5470-5725	22.79	4.83	20	0.1151	1
802.11an HT40	5725-5850	22.35	4.9	20	0.1056	1
802.11ac VHT20	5150-5250	22.93	4.81	20	0.1183	1
802.11ac VHT20	5250-5350	21.09	4.2	20	0.0672	1
802.11ac VHT20	5470-5725	19.70	4.83	20	0.0565	1
802.11ac VHT20	5725-5850	22.62	4.9	20	0.1125	1
802.11ac VHT40	5150-5250	22.10	4.81	20	0.0977	1
802.11ac VHT40	5250-5350	23.34	4.2	20	0.1129	1
802.11ac VHT40	5470-5725	22.82	4.83	20	0.1159	1
802.11ac VHT40	5725-5850	22.43	4.9	20	0.1076	1
802.11ac VHT80	5150-5250	16.34	4.81	20	0.0259	1
802.11ac VHT80	5250-5350	17.62	4.2	20	0.0302	1
802.11ac VHT80	5470-5725	22.35	4.83	20	0.1039	1
802.11ac VHT80	5725-5850	22.06	4.9	20	0.0987	1

Temperature : 22℃ Humidity : 64%

Test Date : Jun. 10, 2018 Test Mode : Beamforming

Modulation Mode	Frequency band (MHz)	Max. Conducted output power (dBm)	Antenna gain (dBi)	Distance (cm)	Power density (mW/cm2)	Limit (mW/cm2)
802.11a	5150-5250	19.94	7.51	20	0.1106	1
802.11a	5250-5350	17.60	7.12	20	0.0589	1
802.11a	5470-5725	17.14	7.46	20	0.0574	1
802.11a	5725-5850	19.82	7.56	20	0.1089	1
802.11an HT20	5150-5250	19.85	7.51	20	0.1083	1
802.11an HT20	5250-5350	18.05	7.12	20	0.0654	1
802.11an HT20	5470-5725	16.66	7.46	20	0.0514	1
802.11an HT20	5725-5850	19.54	7.56	20	0.1020	1
802.11an HT40	5150-5250	19.02	7.51	20	0.0895	1
802.11an HT40	5250-5350	20.31	7.12	20	0.1100	1
802.11an HT40	5470-5725	19.78	7.46	20	0.1055	1
802.11an HT40	5725-5850	19.34	7.56	20	0.0974	1
802.11ac VHT20	5150-5250	19.92	7.51	20	0.1101	1
802.11ac VHT20	5250-5350	18.08	7.12	20	0.0658	1
802.11ac VHT20	5470-5725	16.69	7.46	20	0.0517	1
802.11ac VHT20	5725-5850	19.61	7.56	20	0.1038	1
802.11ac VHT40	5150-5250	19.09	7.51	20	0.0909	1
802.11ac VHT40	5250-5350	20.33	7.12	20	0.1106	1
802.11ac VHT40	5470-5725	19.81	7.46	20	0.1062	1
802.11ac VHT40	5725-5850	19.42	7.56	20	0.0993	1
802.11ac VHT80	5150-5250	13.33	7.51	20	0.0241	1
802.11ac VHT80	5250-5350	14.61	7.12	20	0.0296	1
802.11ac VHT80	5470-5725	19.34	7.46	20	0.0952	1
802.11ac VHT80	5725-5850	19.05	7.56	20	0.0911	1