



Test Report

Report No.: RKEYS251201192

Date: Jan. 15, 2025

Page 1 of 37

JAPAN RF TEST REPORT

For

Product: Single Board Computer

Model: BPI-M4 ZERO

Report No.: RKEYS251201192

Issued for

FINGGAL LINK CO., LTD

2-6-6, Motoasakusa, Taito-ku, Tokyo 111-0041, Japan

Issued by

Guangdong KEYS Testing Technology Co., Ltd.

**Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong,
China**

Table of Contents

1. TEST CERTIFICATION	4
2. GENERAL INFORMATION	5
2.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
2.2 SYSTEM TEST CONFIGURATION	6
2.3 SUMMARY OF TEST RESULTS	8
2.4 LIST OF TEST AND MEASUREMENT INSTRUMENTS	9
2.5 MEASUREMENT UNCERTAINTY	9
3. FREQUENCY ERROR MEASUREMENT	10
3.1 LIMIT	10
3.2 TEST PROCEDURES	10
3.3 TEST SETUP	10
3.4 TEST RESULT	10
OCCUPIED BANDWIDTH (99%) AND SPREADING BANDWIDTH	12
4.1 LIMIT	12
4.2 MEASUREMENT PROCEDURE	12
4.3 TEST SETUP	13
4.4 TEST RESULT	13
SPURIOUS EMISSION INTENSITY	17
5.1 LIMIT	17
5.2 MEASUREMENT PROCEDURE	17
5.3 TEST SETUP	17
5.4 TEST RESULT	17
6. SECONDARY SPURIOUS EMISSIONS	28
6.1 LIMIT	28
6.2 MEASUREMENT PROCEDURE	28
6.3 TEST SETUP	28
6.4 TEST RESULT	29
7. ANTENNA POWER ERROR AND EIRP ANTENNA POWER	33
7.1 LIMIT	33
7.2 MEASUREMENT PROCEDURE	33
7.3 TEST SETUP	33



7.4 TEST RESULT	33
8. INTERFERENCE PREVENTION FUNCTION	35
8.1 LIMIT	35
8.2 MEASUREMENT PROCEDURE	35
8.3 TEST RESULT	35
9. PHOTOGRAPHS OF TEST SET-UP	36
10. PHOTOGRAPHS OF THE EUT	37

1. TEST CERTIFICATION


Product:	Single Board Computer
Trade mark:	/
Main Model:	BPI-M4 ZERO
Applicant :	FINGGAL LINK CO., LTD
Address:	2-6-6, Motoasakusa, Taito-ku, Tokyo 111-0041,Japan
Manufacturer:	Bipai Electronic Technology (Dongguan) Co.,LTD
Address:	Room 301, Building 3, No. 31 Lixiang Road, Dalang Town, Dongguan City, Guangdong Province, China
Sample Receive Date:	Dec. 01, 2025
Test Date:	Dec. 01, 2025~Jan. 15, 2025
Applicable Standards:	MIC Notice No.88 Appendix No.43 Article 2, Paragraph 1, Item 19 Rules Section
Application Purpose	Original Grant

The above equipment has been tested by Guangdong KEYS Testing Technology Co., Ltd. and found compliance with the requirements in the technical standards mentioned above. The test results presented in this report only relate to the product/system tested. The other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Prepared by:

Evan Fang / Engineer



Approved by:

Bruce Zhang / Manager

2. GENERAL INFORMATION

2.1 Product Description for Equipment under Test (EUT)

EUT Description	Single Board Computer
Model No.	BPI-M4 ZERO
Model Lists	/
Input voltage	Type-C Input : DC 5V/3A
Radio Type	2.4GHz
Type of Modulation	DSSS,OFDM
Operation Frequency	B/g/n20:2412-2472MHz
Rated Power	802.11 b:4mW/MHz 802.11 g:4mW/MHz 802.11 n20:4mW/MHz
Antenna Type	External antenna
Antenna Gain	5.02dBi
Sample/EUT Status	Good condition
Adapter	/

2.2 System Test Configuration

2.2.1 Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

2.2.2 EUT Exercise Software


Test software:Sending command by Serial port tool IPOP V4.1

Mode	Data rate	Power Setting
802.11b	1Mbps	10
802.11g	6Mbps	10
802.11n20	MCS0	10

2.2.3 Support Equipment

Manufacturer	Description	Model	Serial Number
Notebook	Lenovo Rescuer 15ISK	PF0GS9S1	Lenovo

2.2.4 Block Diagram of Configuration



2.2.5 Test Voltage

The EUT has its own voltage regulator principle from LDO of chip AXP313A, the output voltage of the chip is 3.3V and the fluctuation of power supply to the RF circuit of EUT is equal to or less than +/- 1%. So exempt extremely high and low supply voltage condition tests, EUT only operated in normal voltage to test all regulations.

1.2.1 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 20~30°C
- Humidity: 25~75%
- Atmospheric pressure: 86-106 kPa

Test Item	Environmental Condition
Frequency Error	22.3°C,53%RH
Occupied Bandwidth and Spreading Bandwidth	22.8°C,56%RH
Spurious emission intensity	22.3°C,53%RH
Antenna Power Error and EIRP Antenna Power	22.8°C,56%RH
Secondary Spurious Emissions	22.3°C,53%RH
Interference Prevention Function	22.3°C,53%RH
Construction Protection Confirmation	22.3°C,53%RH

1.2.2 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

1.2.3 Special Accessories

Not available for this EUT intended for grant.

2.3 Summary of Test Results

Article 2, Paragraph 1, Item 19	Ordinance Regulating Radio Equipment	Description of Test	Test result
	Article 5	Frequency Error	PASS
	Article 6	Occupied Bandwidth and Spreading Bandwidth	PASS
	Article 7	Spurious emission intensity	PASS
	Article 14&Article 49-20	Antenna Power Error and EIRP Antenna Power	PASS
	Article 24.2	Secondary Spurious Emissions	PASS
	Article 49-20	Transmission Antenna Gain	Not Applicable
	Article 49-20	Transmission Radiation Angle Width	Not Applicable
	Article 49-20	Carrier Sense	Not Applicable*
	Article 49-20	Frequency Hopping Dwell Time	Not Applicable**
	Article 9-4.5	Interference Prevention Function	PASS
	Article 49-20	Construction Protection Confirmation	PASS

Not Applicable

- This test item was not required

Not Applicable*

- Application to transmitting devices which E.I.R.P. is less than [2.14dBi+antenna power limit] and the shortage of E.I.R.P. is compensated by the antenna power.

- Application to transmitting devices with OFDM modulation and the occupied bandwidth greater than 26MHz.

Not Applicable**

- Testing is only required for FHSS system devices.

Construction Protection Confirmation:Please refer to document "C5266098 X10 Ed.2 Japan Radio Protection Statement 9" for detail description about Protection Statement.

2.4 List of Test and Measurement Instruments

Equipment	Manufacturer	Model No.	Equipment No.	Last Cal.	Cal. Interval
Spectrum Analyzer	Keysight	N9020A	KEYS-EL-238	Mar. 03, 2025	1 Year
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	KEYS-EL-236	Mar. 03, 2025	1 Year
DC Power	Agilent	E3632A	KEYS-EL-243	Mar. 03, 2025	1 Year
Signal Generator	Agilent	N 5182A	KEYS-EL-237	Mar. 03, 2025	1 Year
Power meter	Agilent	E4417A	KEYS-EL-260	May 17, 2025	1 Year
Power Probe	Agilent	E9304A	KEYS-EL-261	May 17, 2025	1 Year
Temperature & Humidity Meter	Beichuang	HTC-1	KEYS-EL-226	Mar. 03, 2025	1 Year

Note:

The body that the calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1). For all equipment in the above table, the calibration company is CCIC (Shenzhen) Metrology & Testing Service Co.,Ltd.

2.5 Measurement Uncertainty

Uncertainty	
Parameter	Uncertainty
Radio frequency	± 0.12 ppm
Occupied Channel Bandwidth	± 142.12 kHz
RF power conducted	± 0.74 dB
RF power density test	± 1.28 dB
Spurious emissions, conducted	± 1.78 dB
Humidity	$\pm 4.6\%$
Temperature	$\pm 0.7^{\circ}\text{C}$
Time	$\pm 1.25\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$

3. Frequency Error Measurement Limit


Standard	Item	Limit
Article 2-1 Item 19	Tolerance of Frequency	± 50 ppm or less

3.2 Test Procedures

- Connect EUT antenna terminal to the Spectrum Analyzer.
- Set Spectrum Analyzer as below:

Frequency : Test Frequency
 SPAN : 500kHz
 RBW : 10kHz
 VBW : 10kHz
 Sweep Time : Auto
 Detector Mode : Peak
 Display Mode : Max Hold

3.3 Test Setup




3.4 Test Result

Please refer to following tables.

Condition	Mode	Ch.	Antenna	Center Frequency (MHz)	Measured Value (MHz)	Deviation (ppm)	Limit (ppm)	Result
NTNV	CW	1	0	2412	2411.988	-4.79	± 50	PASS
		7		2442	2441.987	-5.22		PASS
		13		2472	2471.988	-4.71		PASS

Test Graphs

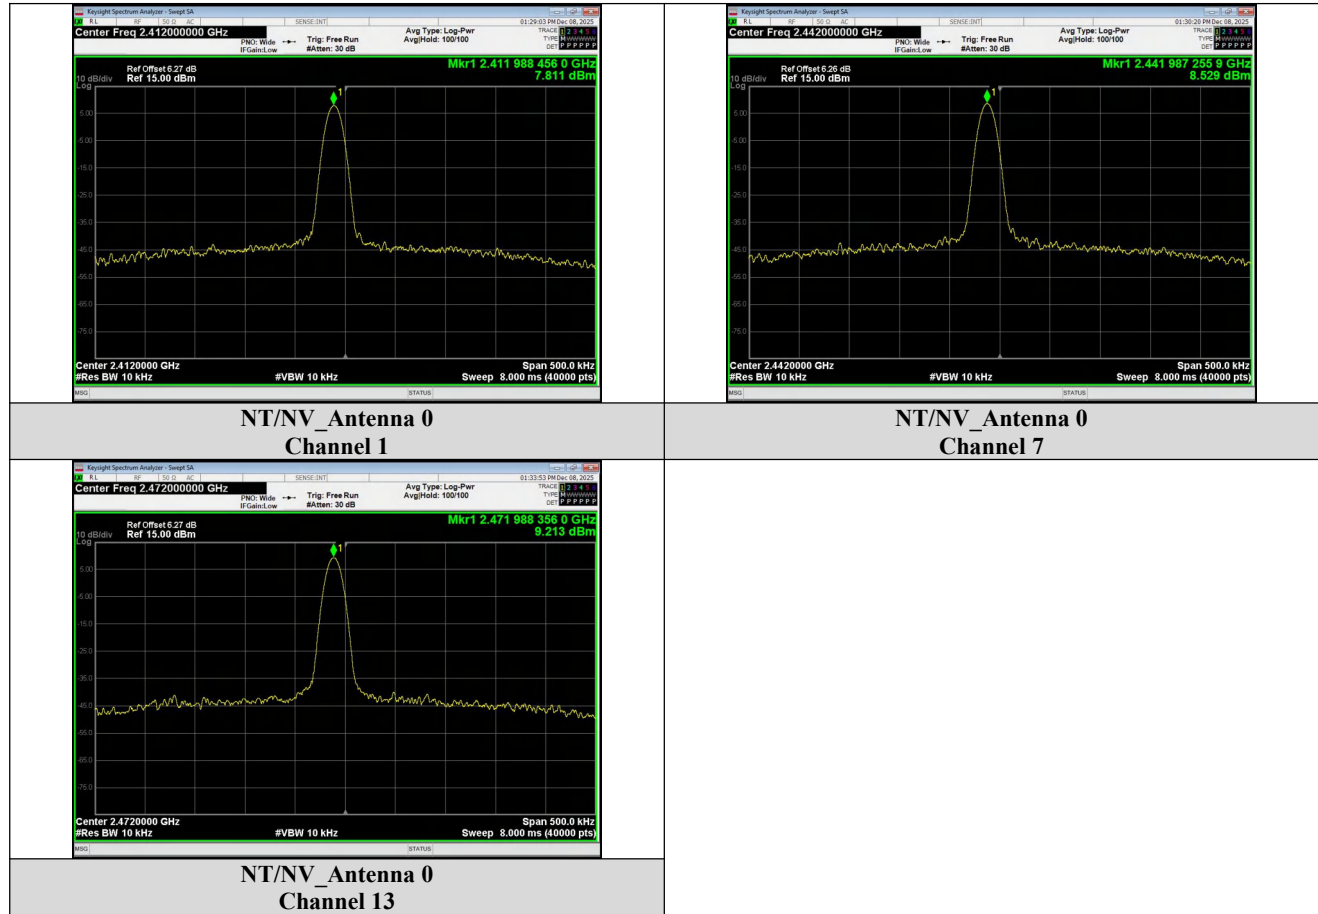

4. Occupied Bandwidth (99%) and Spreading BandwidthLimit

Occupied Bandwidth

Standard	Type	Limit
Article 2-1 Item 19	FHSS	$\leq 83.5\text{MHz}$
	DSSS	$\leq 26\text{MHz}$
	OFDM	$\leq 38\text{MHz}$
	others	$\leq 26\text{MHz}$

Spreading Bandwidth

Standard	Item	Limit
Article 2-1 Item 19	Spreading Bandwidth	/

4.2 Measurement Procedure

- Connect EUT antenna terminal to the Spectrum Analyzer.
- Set Spectrum Analyzer as below:


Occupied Bandwidth

Frequency : Test Frequency
 SPAN : 40MHz
 RBW : 300kHz
 VBW : 300kHz
 Sweep Time : Auto
 Detector Mode : Peak
 Display Mode : Max Hold

Spreading Bandwidth

Frequency : Test Frequency
 SPAN : (Spreading Bandwidth
 limit * 3) MHz (example; 200MHz)
 RBW : 300kHz
 VBW : 300kHz
 Sweep Time : Auto
 Detector Mode : Peak
 Display Mode : Max Hold

4.3 Test Setup

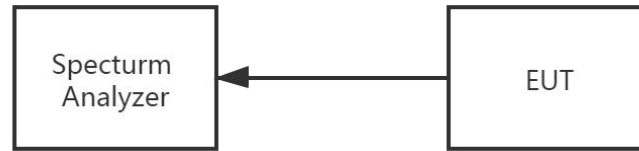



4.4 Test Result

Please refer to following tables and plots.

Condition	Mode	Channel	Antenna	Frequency (MHz)	99% BW (MHz)	Limit (MHz)	Result
NT/NV	IEEE 802.11b	1	0	2412	14.001	26	PASS
		7		2442	13.914		PASS
		13		2472	13.995		PASS
	IEEE 802.11g	1		2412	16.432		PASS
		7		2442	16.369		PASS
		13		2472	16.395		PASS
	IEEE 802.11n_20	1		2412	17.538		PASS
		7		2442	17.471		PASS
		13		2472	17.513		PASS

Test Graphs

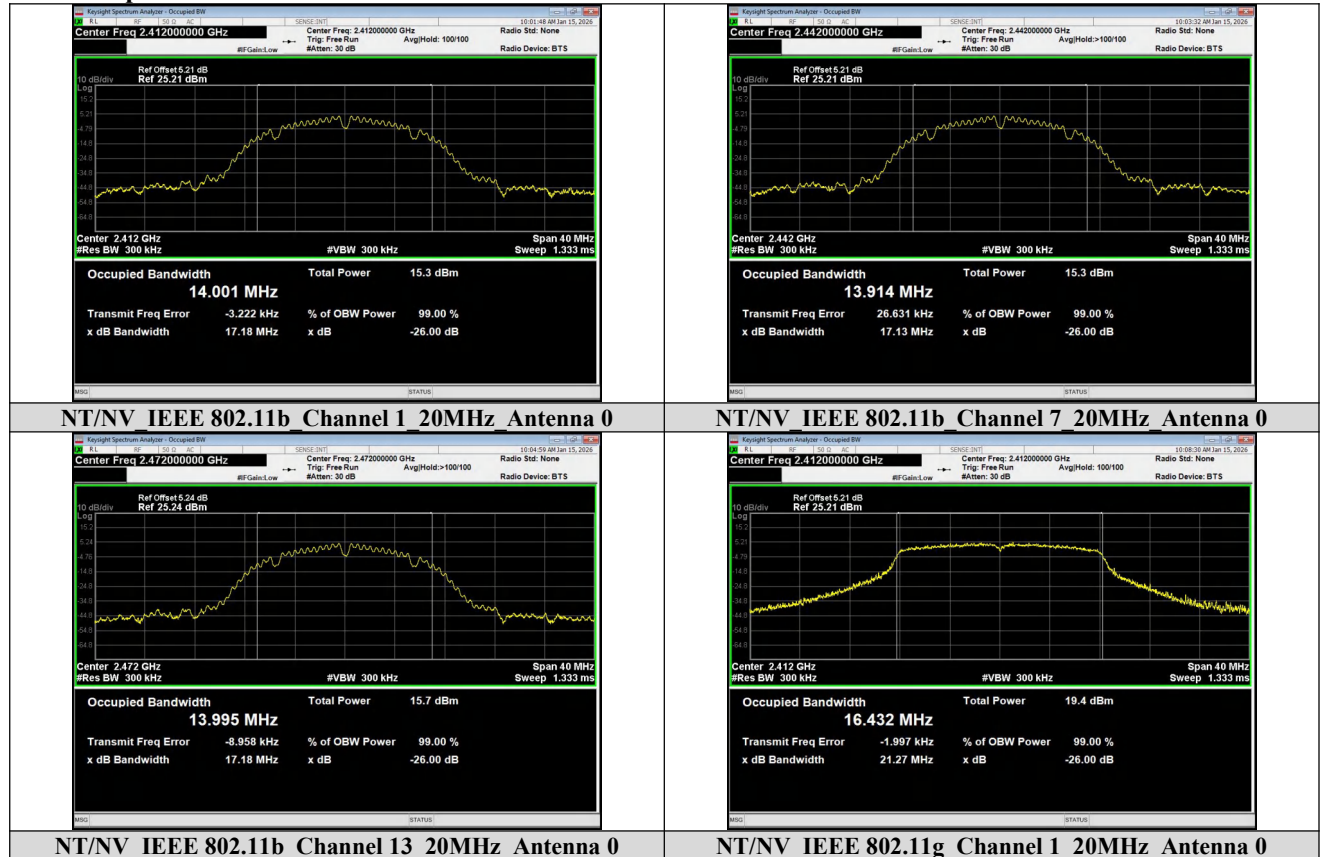

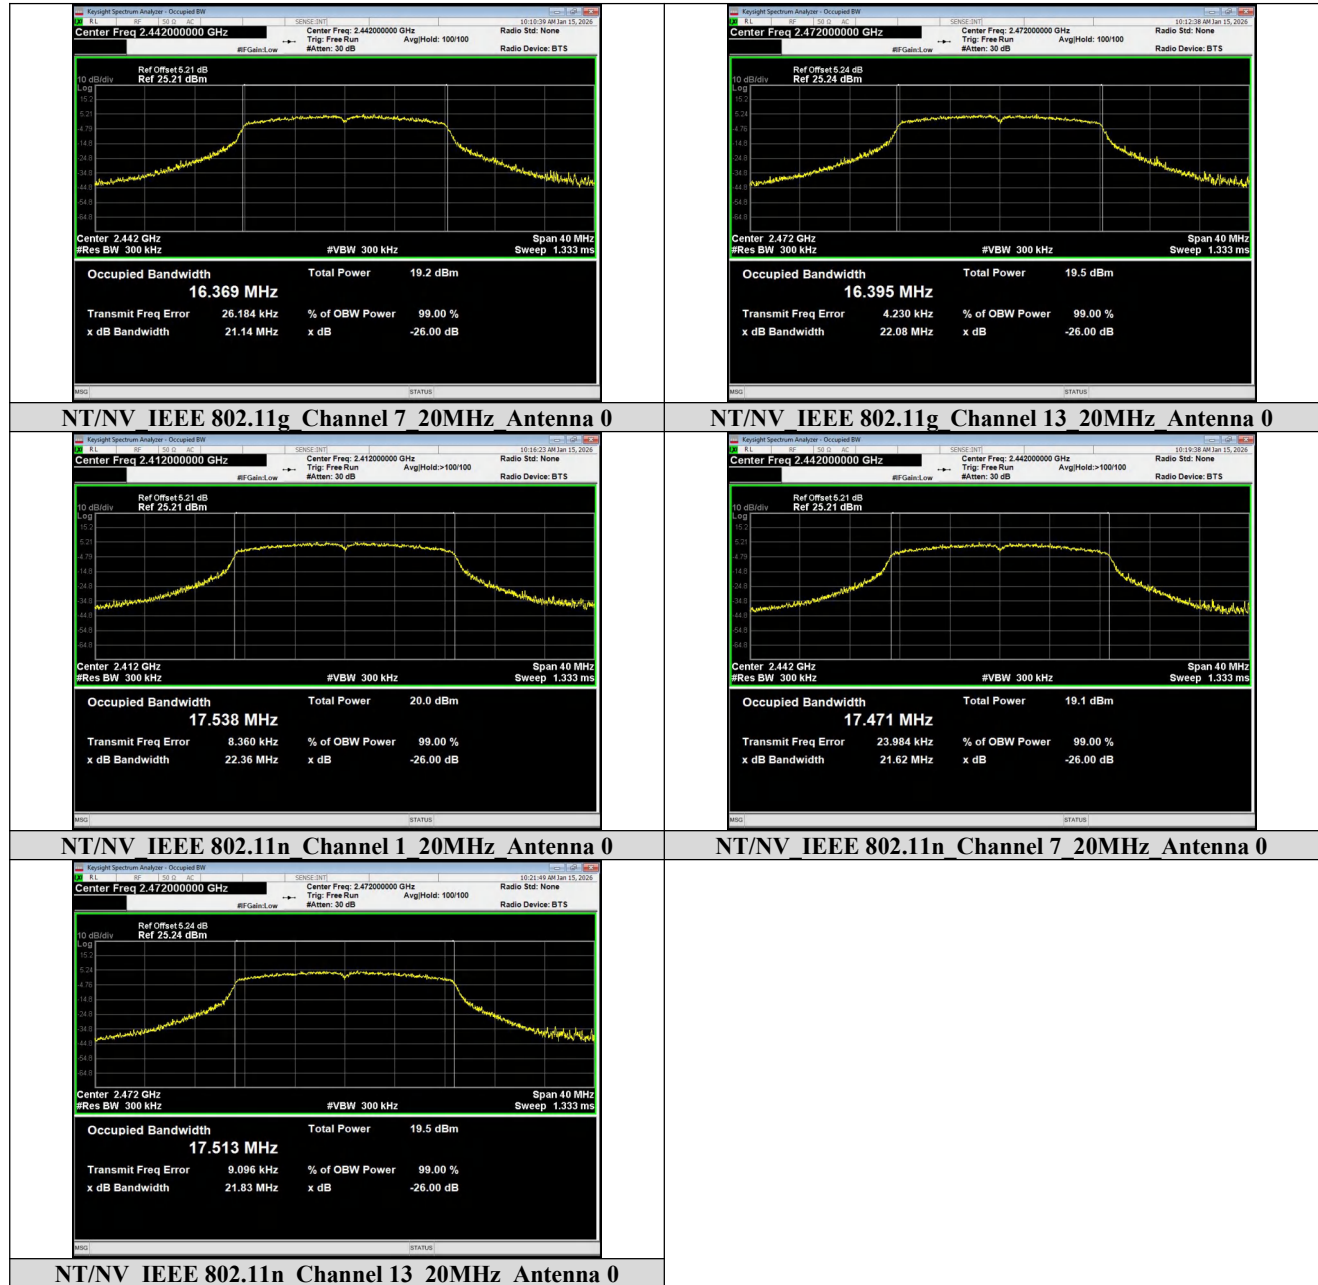

Condition	Mode	Channel	Antenna	Frequency	90%	Spreading	Spreading	Result
-----------	------	---------	---------	-----------	-----	-----------	-----------	--------


Guangdong KEYS Testing Technology Co.,Ltd.


Address: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China
Tel: +86-0769-22221088 <http://www.keys-lab.com> E-mail: info@keys-lab.com

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.
This report shall not be altered, increased or deleted. Without written approval of KEYS, this test report shall not be copied except in full and published as advertisement.

				(MHz)	SBW (MHz)	factor	factor Limit	
NT/NV	IEEE 802.11b	1	0	2412	9.201	6.6915	5	PASS
		7		2442	9.102	6.6196		PASS
		13		2472	9.206	6.6954		PASS
	IEEE 802.11g	1		2412	13.663	9.1087		PASS
		7		2442	13.533	9.0218		PASS
		13		2472	13.656	9.1037		PASS
	IEEE 802.11n_20	1		2412	14.465	9.6434		PASS
		7		2442	14.328	9.5517		PASS
		13		2472	14.435	9.6234		PASS

Test Graphs

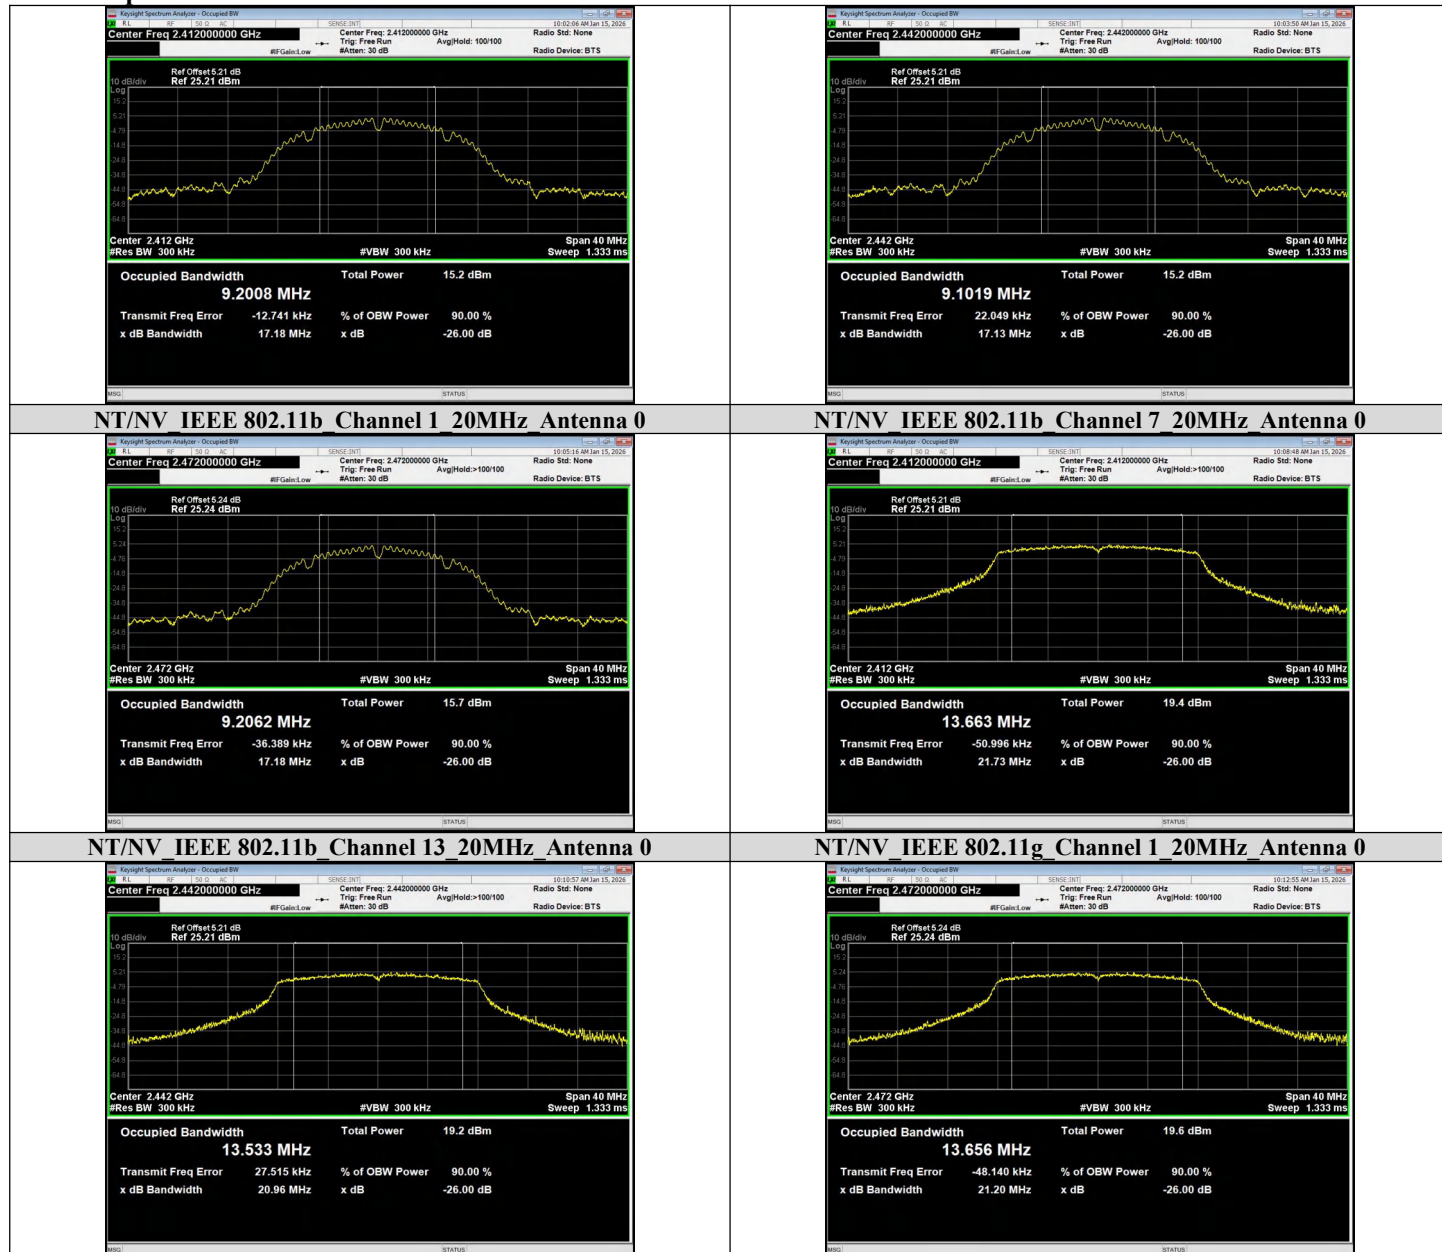

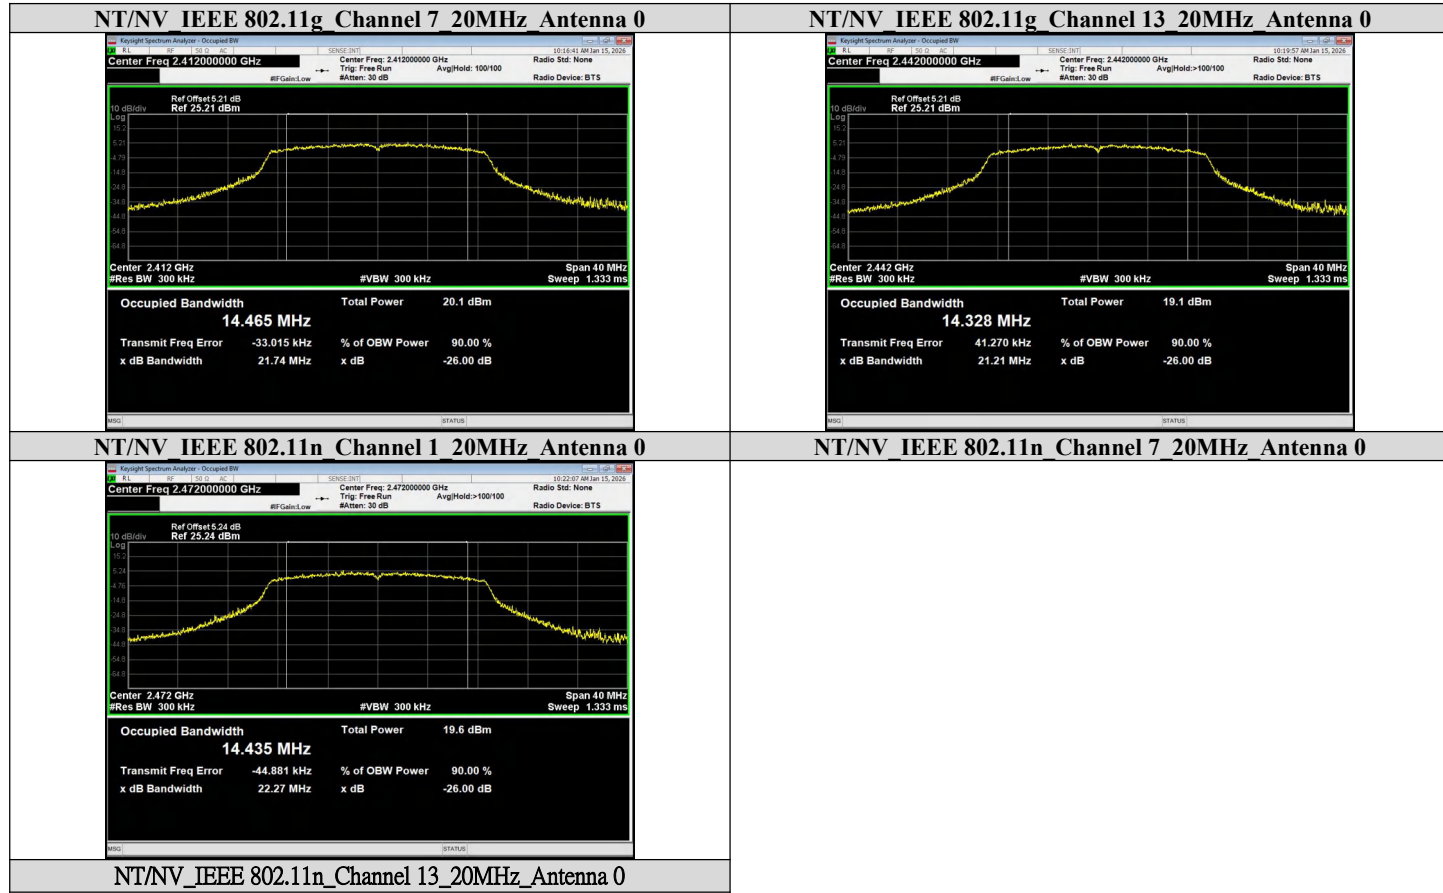

5. Spurious Emission IntensityLimit


Standard	Item	Frequency	Limit
Article 2-1 Item 19	TX Spurious Emission	30 - 1000MHz	2.5 μ W/MHz
		1000 - 2387MHz	2.5 μ W/MHz
		2387 - 2400MHz	25 μ W/MHz
		2483.5 - 2496.5MHz	25 μ W/MHz
		2496.5MHz - 12.5GHz	2.5 μ W/MHz

5.2 Measurement Procedure

- Connect EUT antenna terminal to the Spectrum Analyzer.
- Set Spectrum Analyzer as below:

Frequency : 30- 1000MHz;
 1000 - 2387MHz;
 2387-2400MHz;
 2483.5-2496.5MHz;
 2496.5MHz-12.5GHz
 RBW : 100kHz for Below 1GHz
 1MHz for Above 1GHz
 VBW : 100kHz for Below 1GHz
 1MHz for Above 1GHz
 Sweep Time : Auto
 Detector Mode : Peak
 Display Mode : Max Hold

5.3 Test Setup



5.4 Test Result

Please refer to following table and plots.

ENV	Mode	Channel	RU	Range (MHz)	Ant.0 (dBm)	Ant.0 (uW/MHz)	Limit (uW/MHz)	Result
NT/NV	IEEE	1	N/A	30 to	-70.166	0.00096	2.5	PASS





	802.11b			1000				
NT/NV	IEEE 802.11b	1	N/A	1000 to 2387	-44.682	0.034025	2.5	PASS
NT/NV	IEEE 802.11b	1	N/A	2387 to 2400	-27.846	1.64248	25	PASS
NT/NV	IEEE 802.11b	1	N/A	2483.5 to 2496.5	-53.374	0.004598	25	PASS
NT/NV	IEEE 802.11b	1	N/A	2496.5 to 12500	-52.483	0.005645	2.5	PASS
NT/NV	IEEE 802.11b	7	N/A	30 to 1000	-70.392	0.00091	2.5	PASS
NT/NV	IEEE 802.11b	7	N/A	1000 to 2387	-63.256	0.000472	2.5	PASS
NT/NV	IEEE 802.11b	7	N/A	2387 to 2400	-50.901	0.008126	25	PASS
NT/NV	IEEE 802.11b	7	N/A	2483.5 to 2496.5	-50.392	0.009137	25	PASS
NT/NV	IEEE 802.11b	7	N/A	2496.5 to 12500	-54.825	0.003292	2.5	PASS
NT/NV	IEEE 802.11b	13	N/A	30 to 1000	-70.325	9.3e-05	2.5	PASS
NT/NV	IEEE 802.11b	13	N/A	1000 to 2387	-58.098	0.00155	2.5	PASS
NT/NV	IEEE 802.11b	13	N/A	2387 to 2400	-56.067	0.002473	25	PASS
NT/NV	IEEE 802.11b	13	N/A	2483.5 to 2496.5	-36.557	0.220953	25	PASS
NT/NV	IEEE 802.11b	13	N/A	2496.5 to 12500	-50.074	0.009831	2.5	PASS
NT/NV	IEEE 802.11g	1	N/A	30 to 1000	-70.296	0.00093	2.5	PASS
NT/NV	IEEE 802.11g	1	N/A	1000 to 2387	-51.681	0.00679	2.5	PASS
NT/NV	IEEE 802.11g	1	N/A	2387 to 2400	-22.652	5.430002	25	PASS
NT/NV	IEEE 802.11g	1	N/A	2483.5 to 2496.5	-56.314	0.002337	25	PASS
NT/NV	IEEE 802.11g	1	N/A	2496.5 to 12500	-56.642	0.002167	2.5	PASS
NT/NV	IEEE 802.11g	7	N/A	30 to 1000	-70.440	0.0009	2.5	PASS
NT/NV	IEEE 802.11g	7	N/A	1000 to 2387	-56.367	0.002308	2.5	PASS
NT/NV	IEEE 802.11g	7	N/A	2387 to 2400	-51.789	0.006624	25	PASS
NT/NV	IEEE 802.11g	7	N/A	2483.5 to 2496.5	-52.808	0.005238	25	PASS
NT/NV	IEEE 802.11g	7	N/A	2496.5 to 12500	-54.518	0.003533	2.5	PASS
NT/NV	IEEE 802.11g	13	N/A	30 to 1000	-70.237	0.00095	2.5	PASS
NT/NV	IEEE 802.11g	13	N/A	1000 to 2387	-59.653	0.001083	2.5	PASS
NT/NV	IEEE 802.11g	13	N/A	2387 to 2400	-57.293	0.001865	25	PASS
NT/NV	IEEE 802.11g	13	N/A	2483.5 to 2496.5	-23.920	4.055085	25	PASS
NT/NV	IEEE	13	N/A	2496.5 to	-49.594	0.01098	2.5	PASS





	802.11g			12500				
NT/NV	IEEE 802.11n_20	1	N/A	30 to 1000	-70.127	0.00097	2.5	PASS
NT/NV	IEEE 802.11n_20	1	N/A	1000 to 2387	-50.825	0.00827	2.5	PASS
NT/NV	IEEE 802.11n_20	1	N/A	2387 to 2400	-22.707	5.361669	25	PASS
NT/NV	IEEE 802.11n_20	1	N/A	2483.5 to 2496.5	-56.125	0.002441	25	PASS
NT/NV	IEEE 802.11n_20	1	N/A	2496.5 to 12500	-56.767	0.002105	2.5	PASS
NT/NV	IEEE 802.11n_20	7	N/A	30 to 1000	-70.207	0.00095	2.5	PASS
NT/NV	IEEE 802.11n_20	7	N/A	1000 to 2387	-53.624	0.004341	2.5	PASS
NT/NV	IEEE 802.11n_20	7	N/A	2387 to 2400	-47.724	0.016889	25	PASS
NT/NV	IEEE 802.11n_20	7	N/A	2483.5 to 2496.5	-47.210	0.019011	25	PASS
NT/NV	IEEE 802.11n_20	7	N/A	2496.5 to 12500	-52.402	0.005752	2.5	PASS
NT/NV	IEEE 802.11n_20	13	N/A	30 to 1000	-69.976	0.00101	2.5	PASS
NT/NV	IEEE 802.11n_20	13	N/A	1000 to 2387	-59.678	0.001077	2.5	PASS
NT/NV	IEEE 802.11n_20	13	N/A	2387 to 2400	-56.954	0.002017	25	PASS
NT/NV	IEEE 802.11n_20	13	N/A	2483.5 to 2496.5	-22.387	5.77165	25	PASS
NT/NV	IEEE 802.11n_20	13	N/A	2496.5 to 12500	-50.112	0.009745	2.5	PASS


Test Graphs

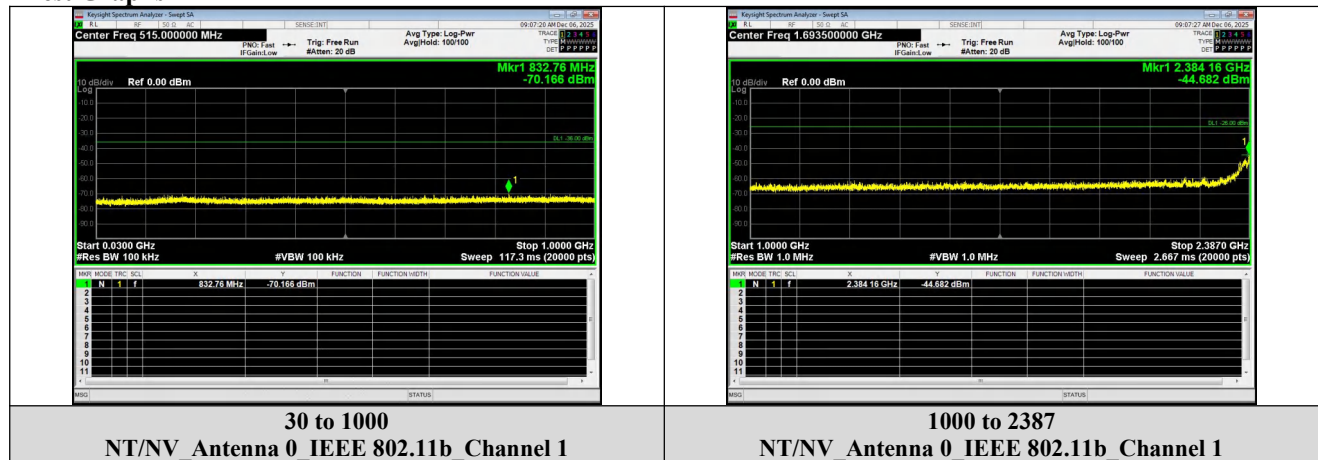


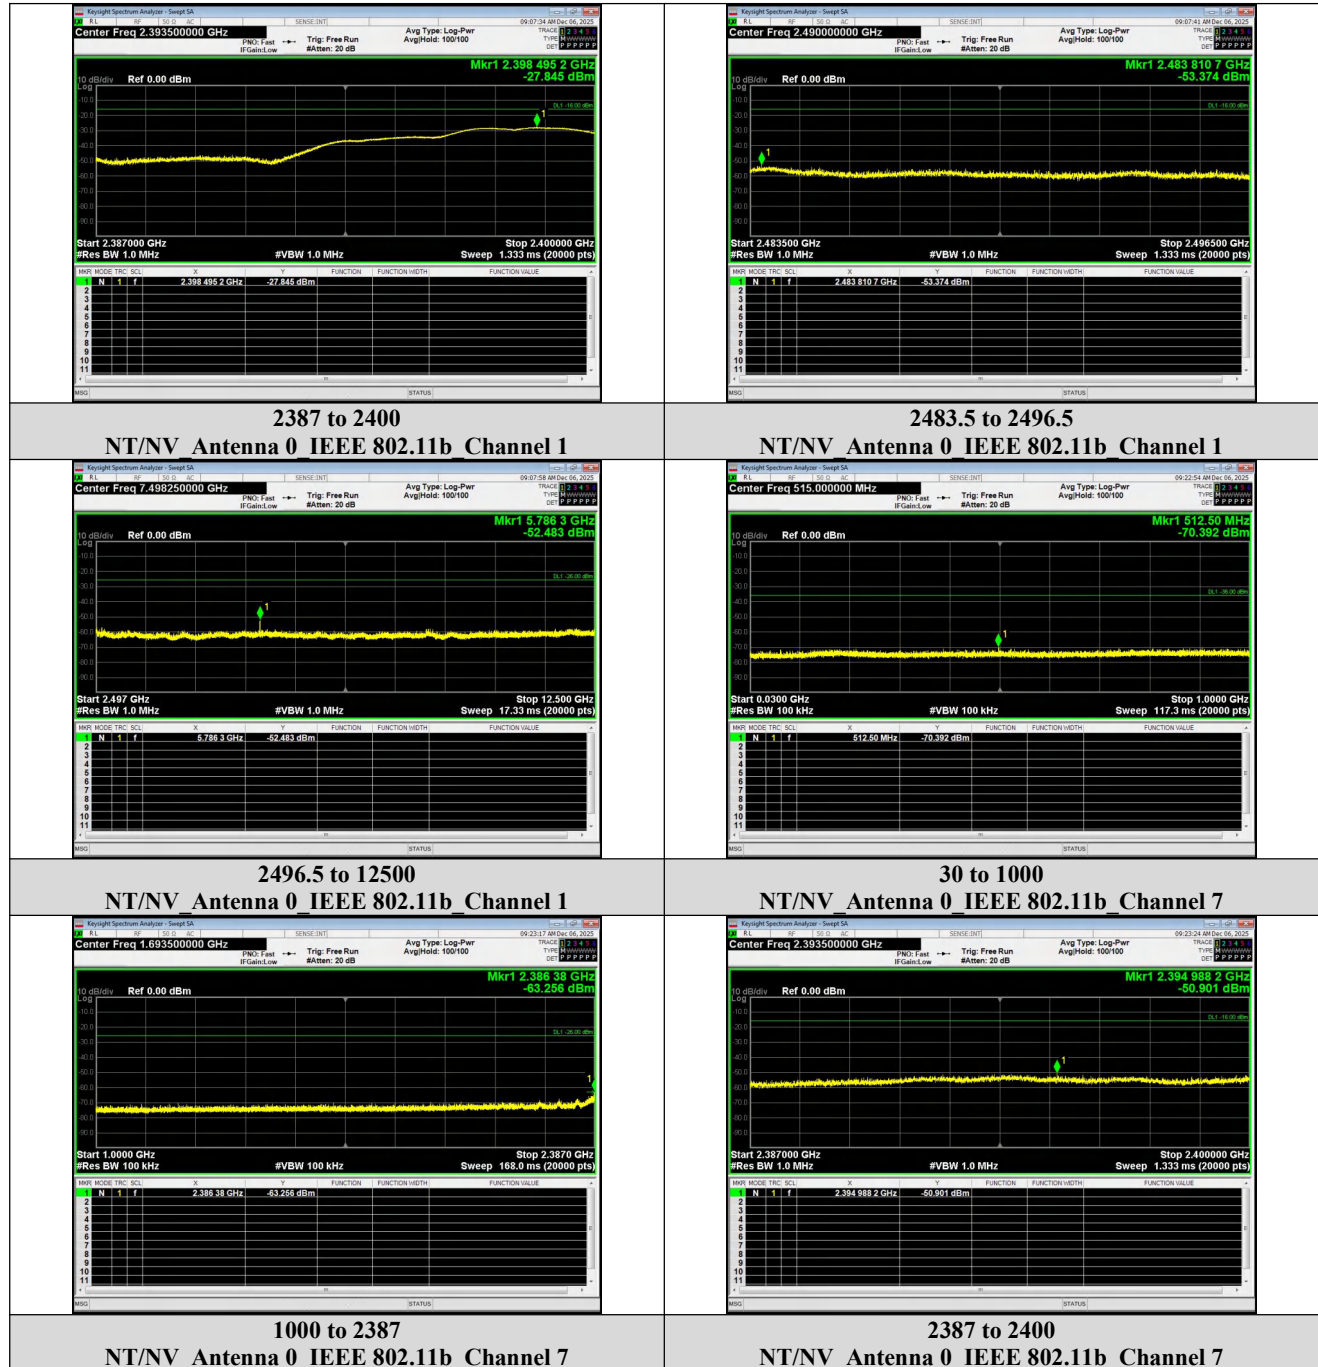


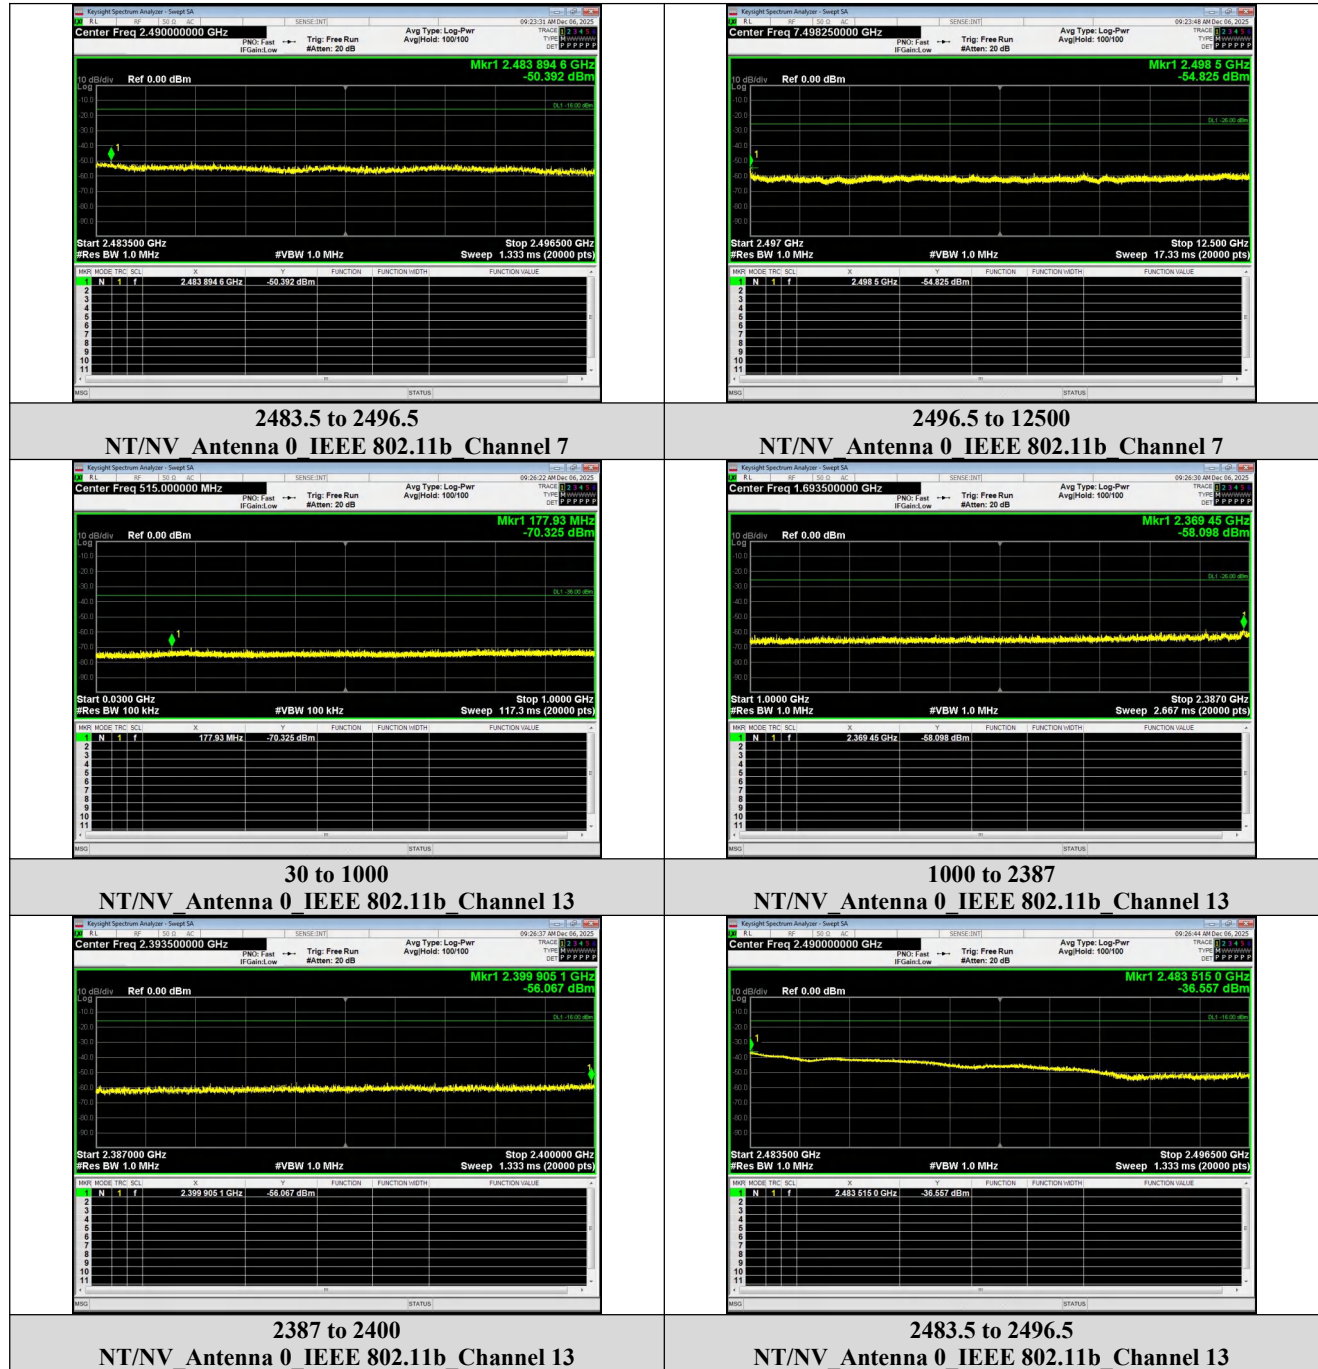


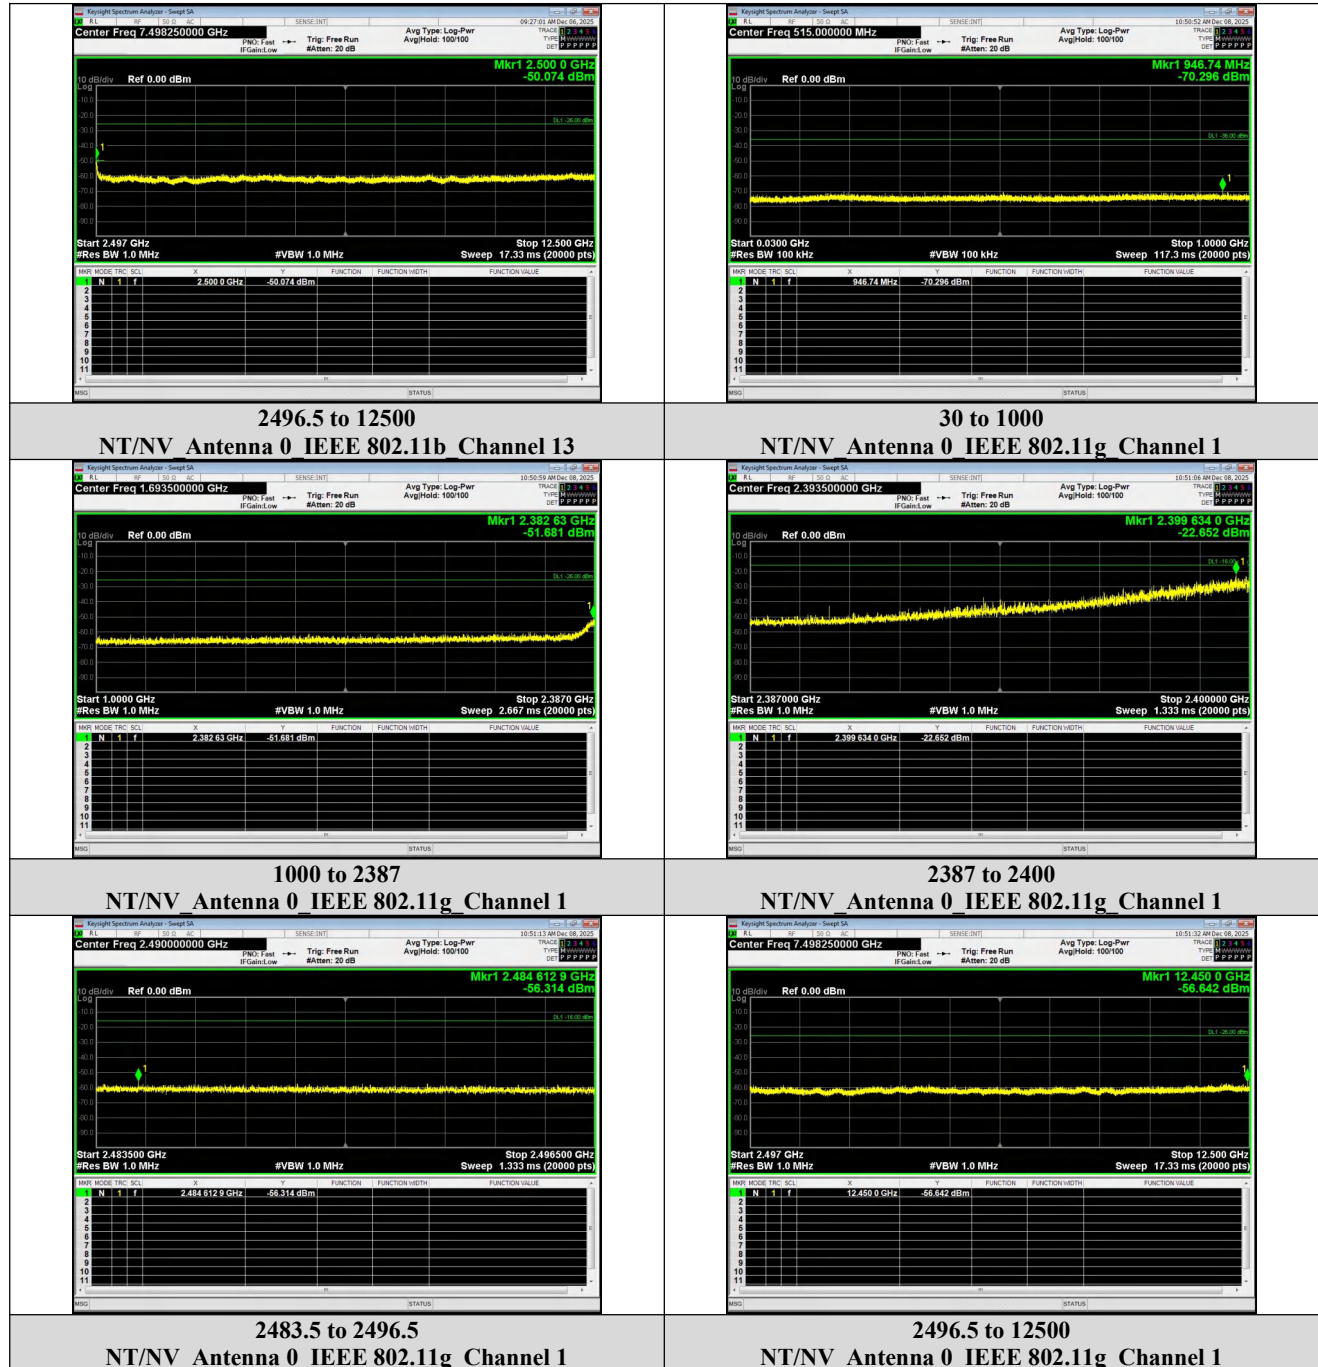

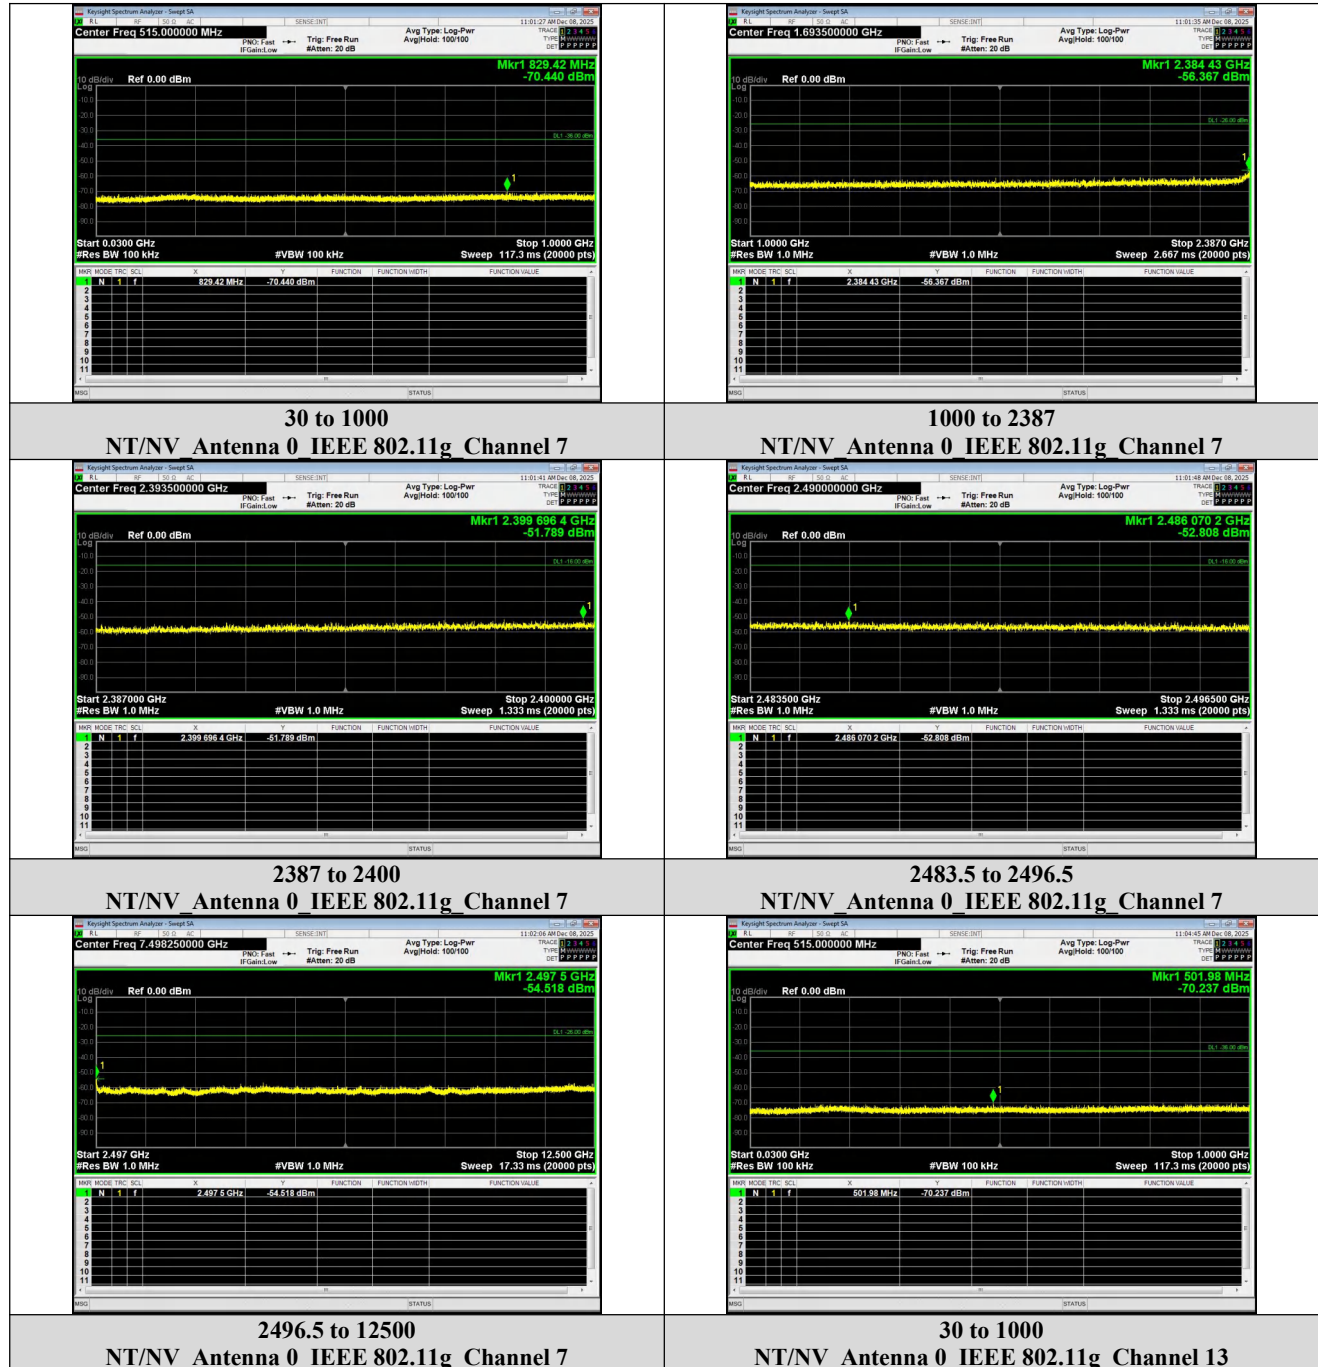

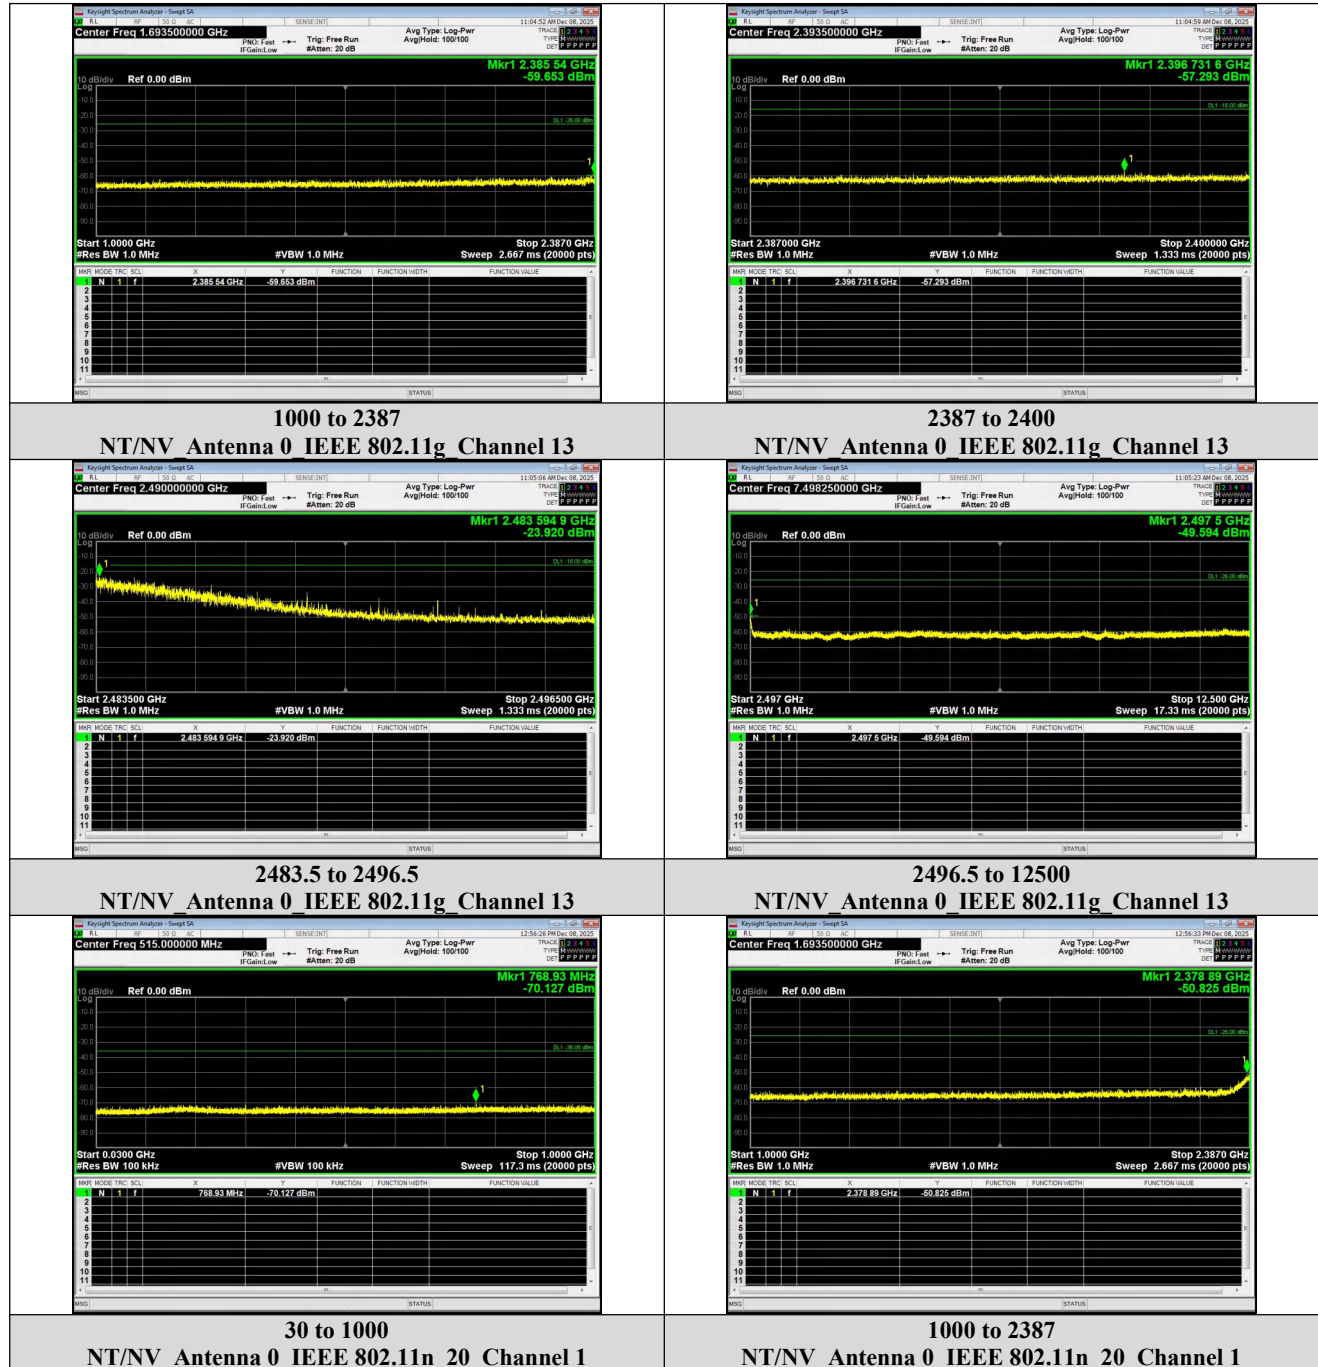

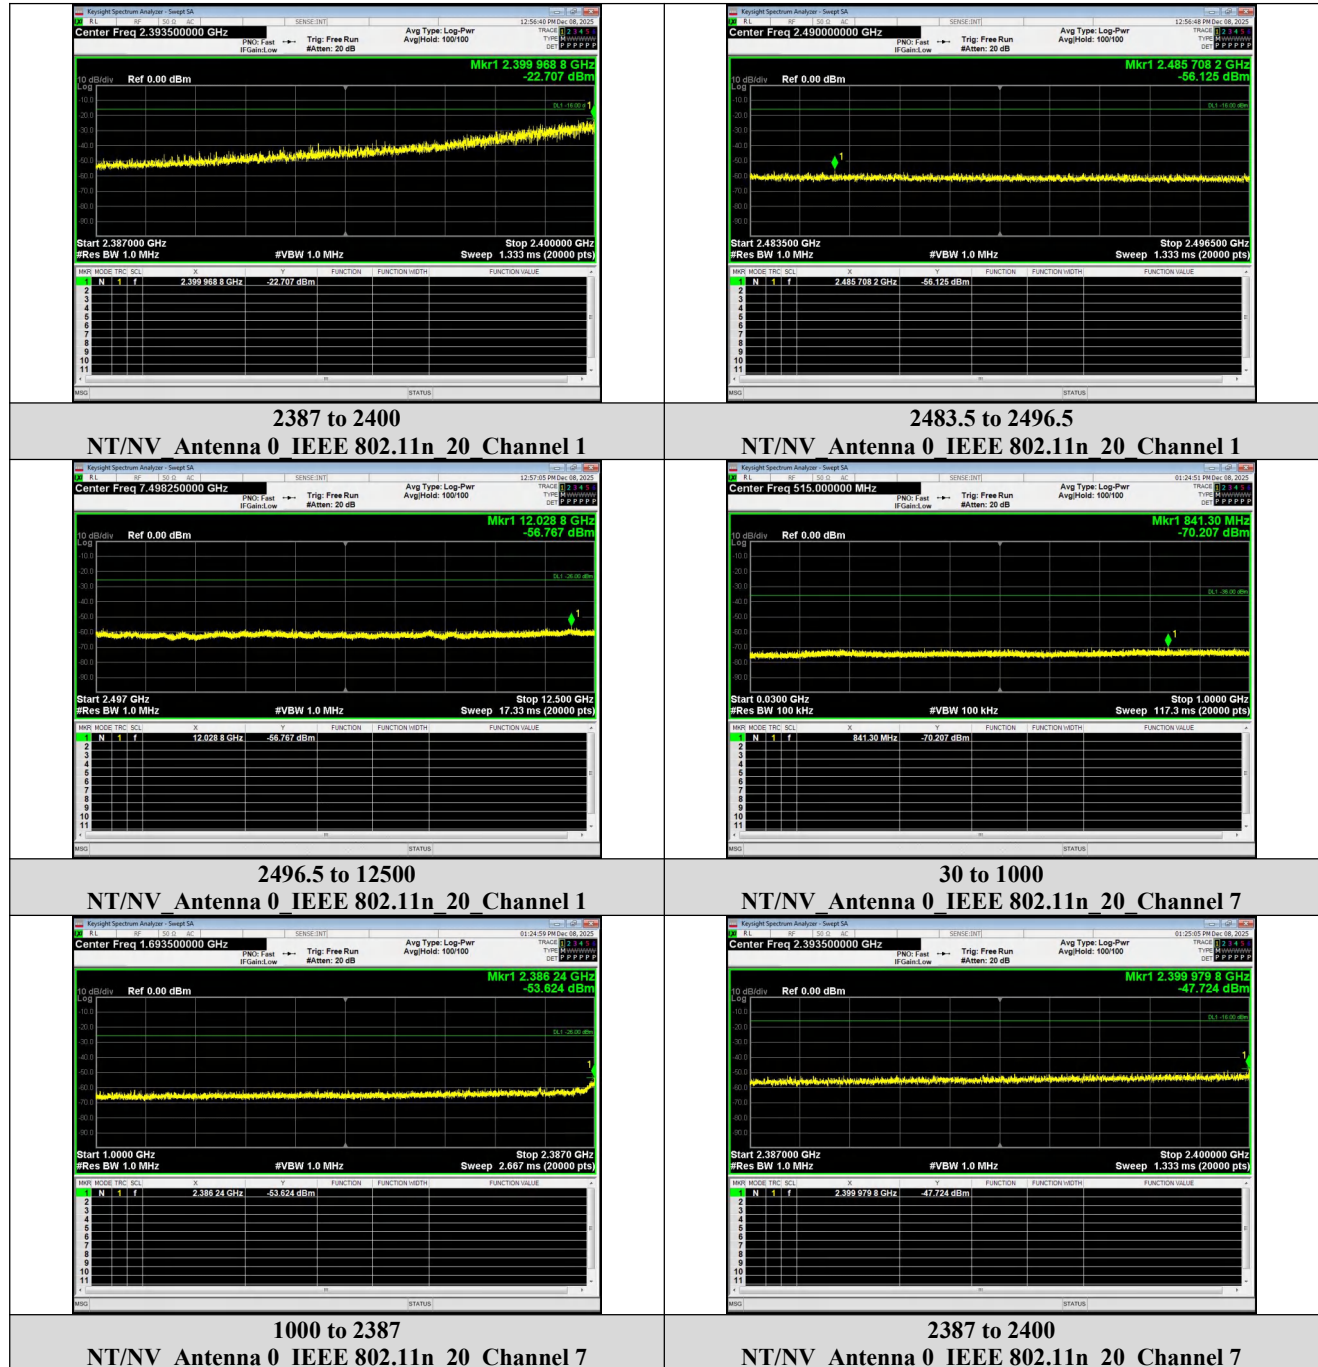

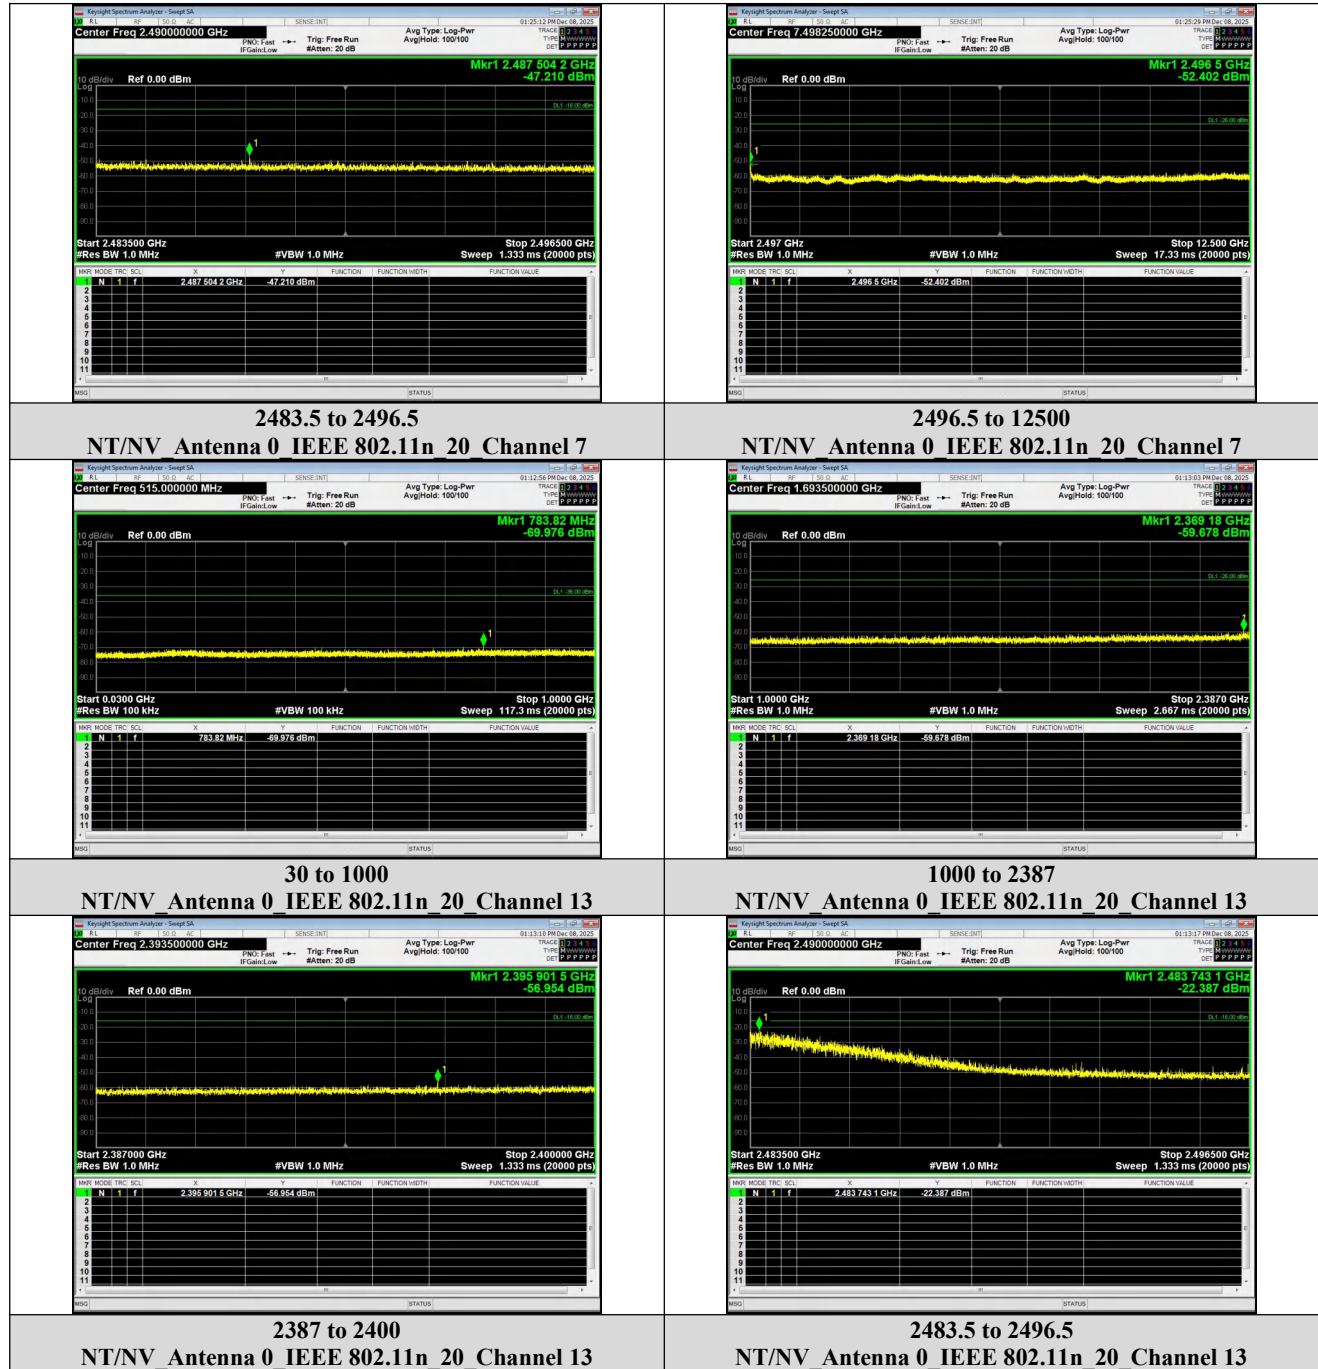




Report No.:RKEYS251201192

Date: Jan. 15, 2025

Page 27 of 37

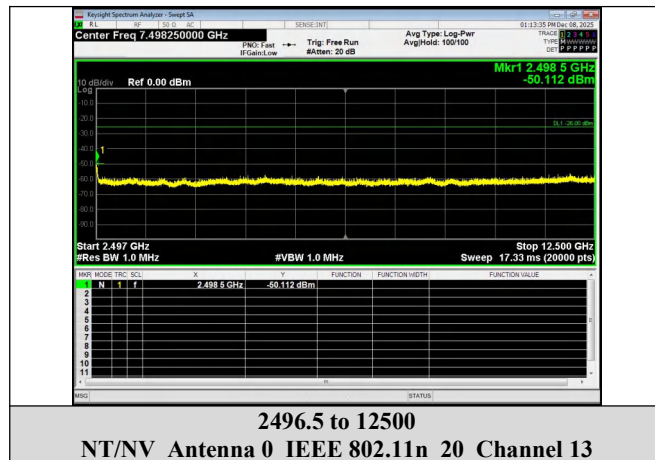

Guangdong KEYS Testing Technology Co.,Ltd.

Address: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China
Tel: +86-0769-22221088 <http://www.keys-lab.com> E-mail: info@keys-lab.com

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.
This report shall not be altered, increased or deleted. Without written approval of KEYS, this test report shall not be copied except in full and published as advertisement.

6. Secondary Spurious Emissions Limit

Standard	Item	Frequency	Limit
Article 2-1 Item 19	Spurious Emission	Below 1GHz	4nW
		Above 1GHz	20nW


6.2 Measurement Procedure

- Connect EUT antenna terminal to the Spectrum Analyzer.

- Set Spectrum Analyzer as below:

Frequency : Below 1GHz(30MHz-1GHz)
Above 1GHz(1-12.5GHz)
RBW : 100kHz for Below 1GHz
1MHz for Above 1GHz
VBW : 100kHz for Below 1GHz
1MHz for Above 1GHz
Sweep Time : Auto
Detector Mode : Peak
Display Mode : Max Hold

6.3 Test Setup

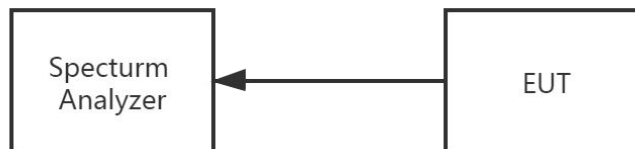


6.4 Test Result





Please refer to following table and plots.


Condition	Mode	Channel	Frequency Range (MHz)	Peak (MHz)	Measured Value (dBm)	Measured Value (nW)	Limit (nW)	Result
NT/NV	IEEE 802.11b	1	30-1000	936.847	-91.470	0.0007	4	PASS
			1000-12500	12035.385	-78.352	0.01	20	PASS
		7	30-1000	780.539	-91.511	0.0007	4	PASS
			1000-12500	11960.249	-77.657	0.02	20	PASS
		13	30-1000	897.795	-90.668	0.0009	4	PASS
			1000-12500	2463.232	-76.440	0.02	20	PASS
	IEEE 802.11g	1	30-1000	948.797	-90.794	0.0008	4	PASS
			1000-12500	2453.648	-72.571	0.06	20	PASS
		7	30-1000	215.760	-91.019	0.0008	4	PASS
			1000-12500	2463.999	-76.611	0.02	20	PASS
		13	30-1000	835.692	-90.676	0.0009	4	PASS
			1000-12500	2455.565	-74.802	0.03	20	PASS
	IEEE 802.11n_20	1	30-1000	802.190	-90.891	0.0008	4	PASS
			1000-12500	2464.382	-76.949	0.02	20	PASS
		7	30-1000	774.738	-91.410	0.0007	4	PASS
			1000-12500	2463.999	-76.934	0.02	20	PASS
		13	30-1000	829.591	-90.884	0.0008	4	PASS
			1000-12500	2463.999	-76.020	0.03	20	PASS

Test Graphs

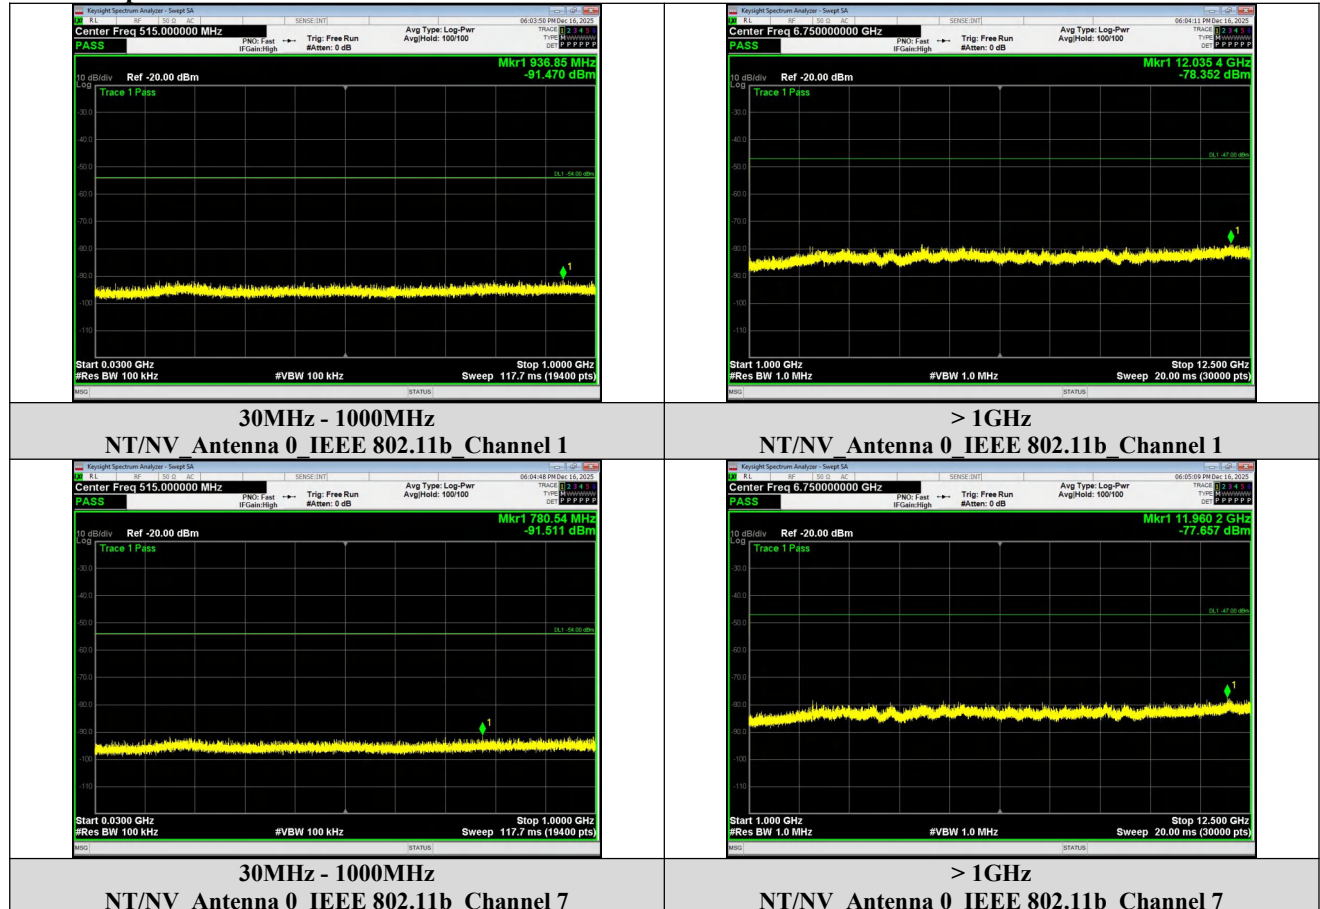

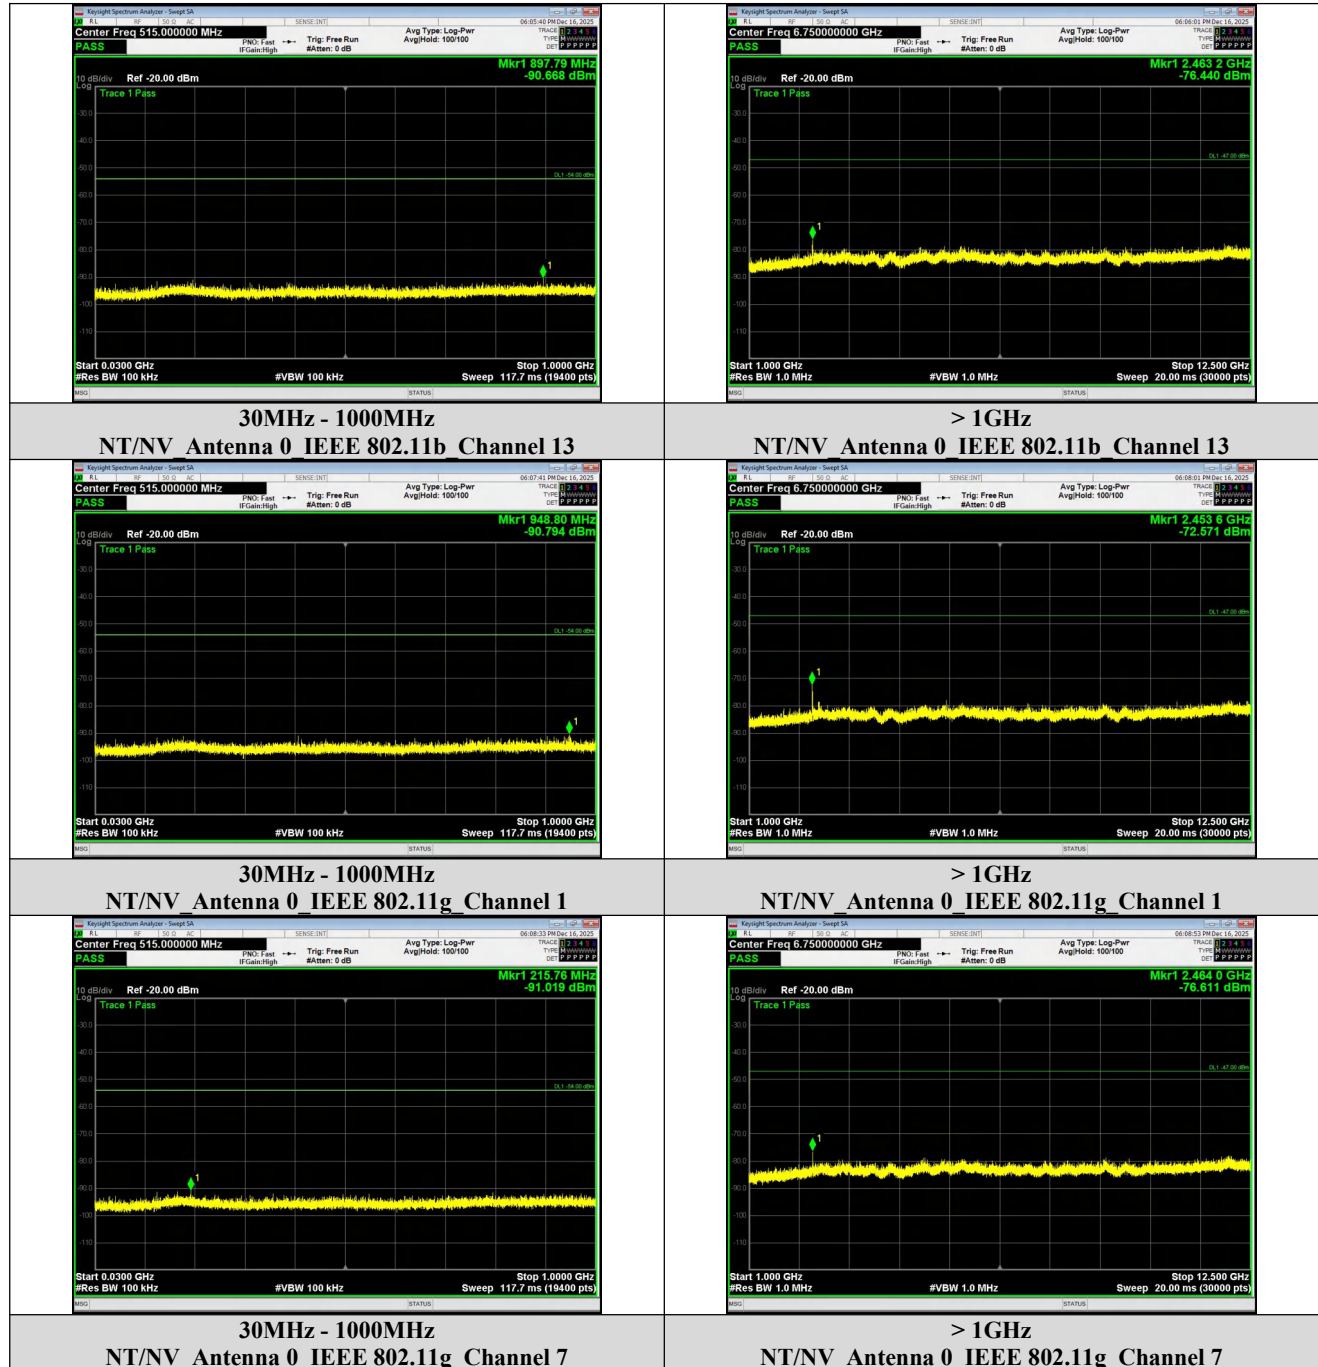

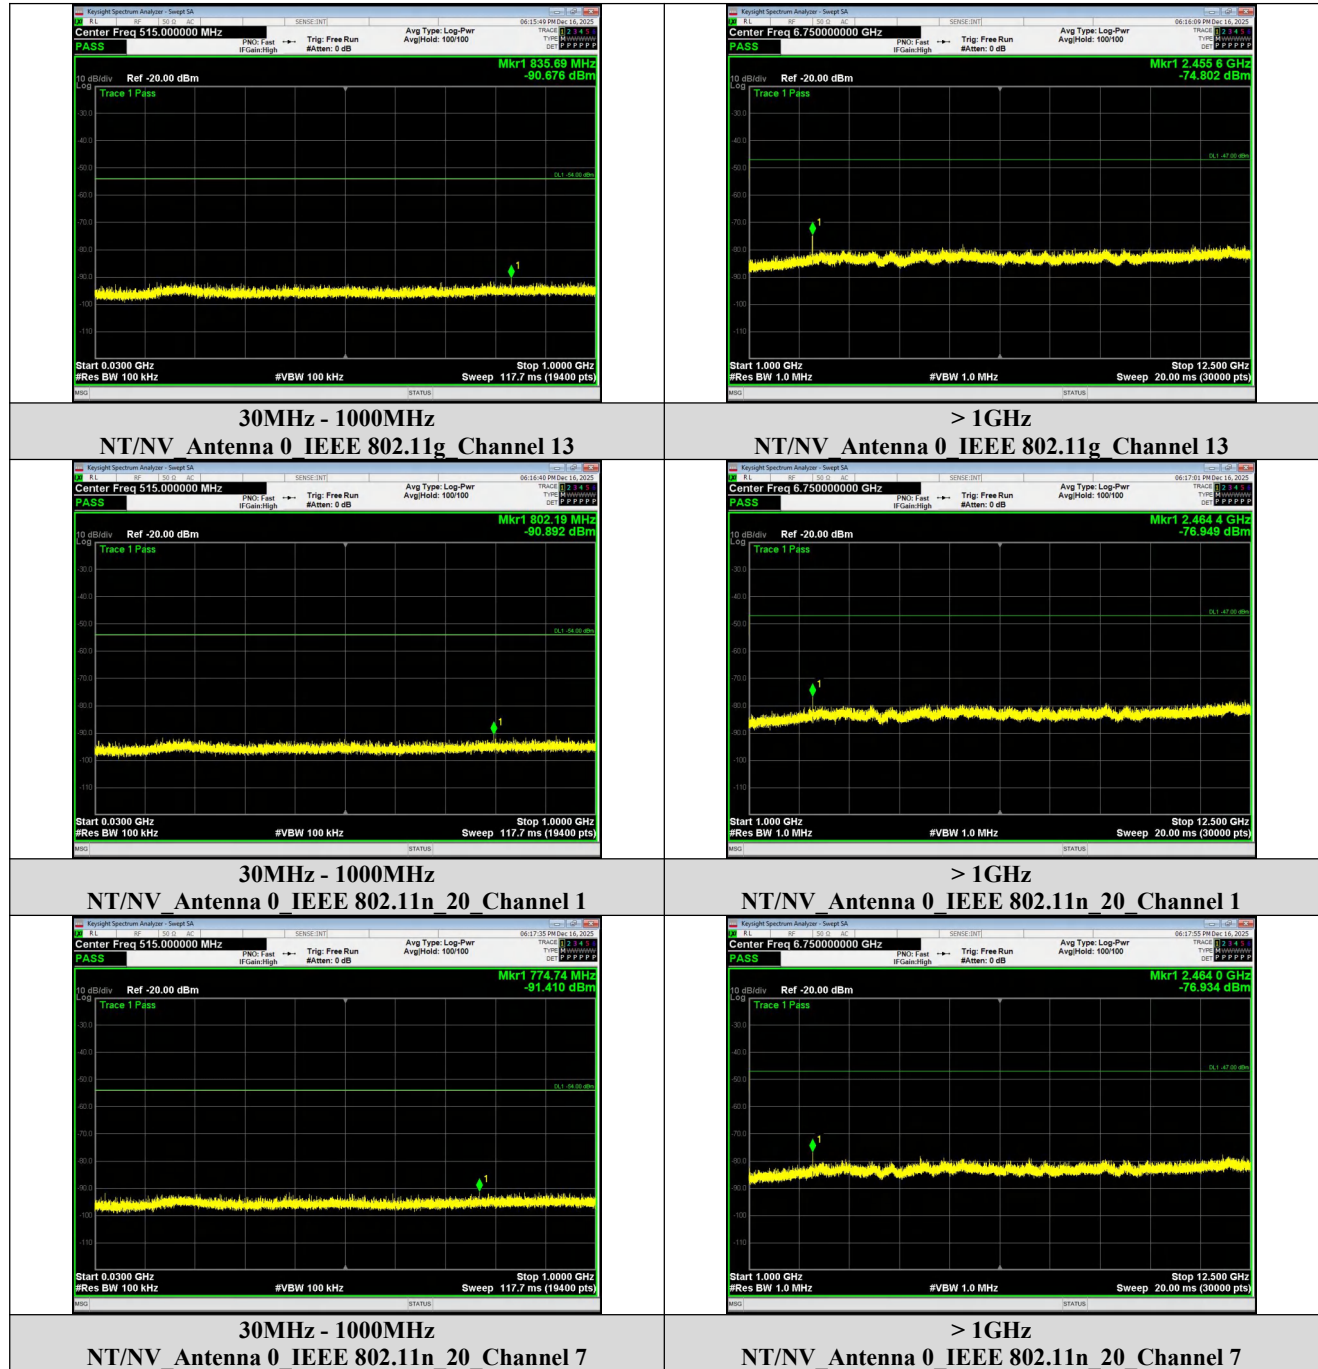

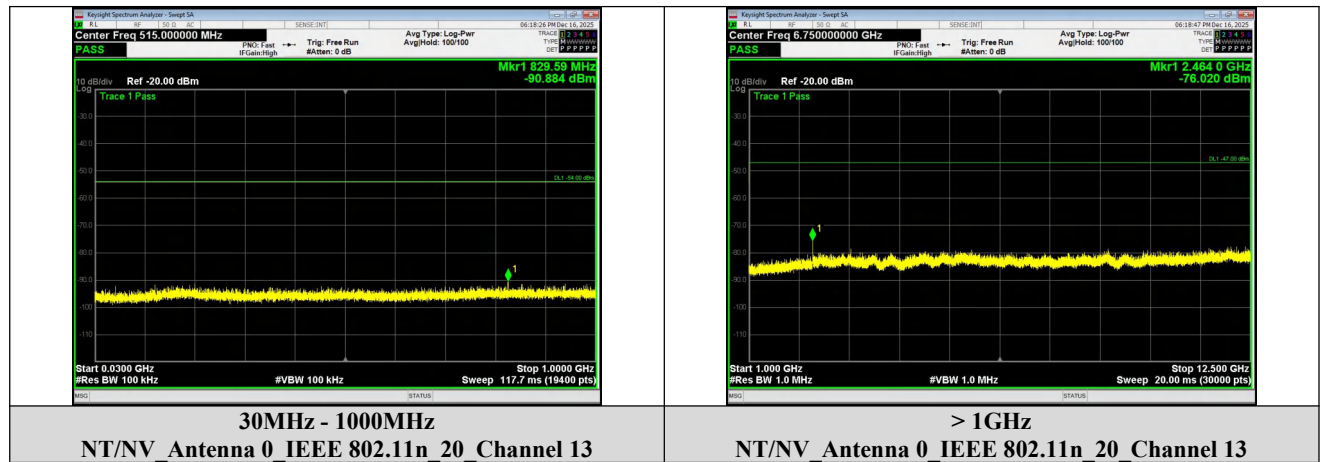


7. Antenna Power Error and EIRP Antenna Power Limit

Standard	Item	Limit
Article 2-1 Item 19	Antenna Power Density	$\leq 3 \text{ mW /MHz}$ (FHSS from 2400-2483.5 MHz) $\leq 10 \text{ mW/MHz}$ (OFDM, DSSS from 2400-2483.5 MHz) $\leq 10 \text{ mW}$ (Other method(Except FHSS & OFDM)from 2400-2483.5 MHz)
	Antenna Power Error	$\leq 20\%$
	EIRP Antenna Power	$\leq 12.14 \text{ dBm/MHz}$

7.2 Measurement Procedure

1. EUT turn to test frequency channel and keep continuous transmission.
2. Reading the output power from the Power sensor as P_{EUT} .
3. Turn the Signal generator to frequency channel the same as the EUT.
4. Turn the level of Signal generator, scan with the power meter until the power equal to P_{EUT} , the level of Signal generator recorded as “P”.
5. The antenna power of EUT is “P”.
6. EIRP power=“P”+antenna gain.

7.3 Test Setup

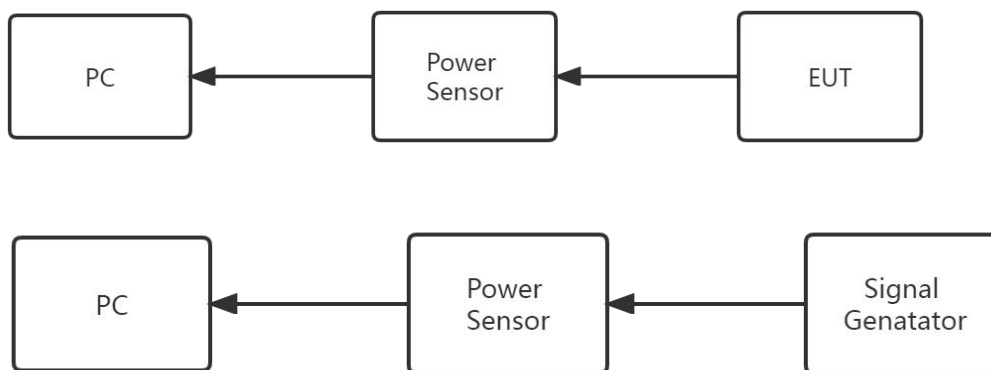

7.4 Test Result

Please refer to following table.

Antenna Power Error

Guangdong KEYS Testing Technology Co.,Ltd.

Address: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China
Tel: +86-0769-22221088 <http://www.keys-lab.com> E-mail: info@keys-lab.com

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.
This report shall not be altered, increased or deleted. Without written approval of KEYS, this test report shall not be copied except in full and published as advertisement.

Condition	Mode	Frequency (MHz)	Antenna	Antenna Power (dBm/MHz)	Antenna Power (mW/MHz)	Declared Power (mW/MHz)	Tolerance (%)	Upper Limit (%)	Verdict
NVNT	b	2412	Ant0	5.405	3.471	4	-13.22	20	Pass
NVNT	b	2442	Ant0	5.441	3.500	4	-12.49	20	Pass
NVNT	b	2472	Ant0	5.838	3.835	4	-4.12	20	Pass
NVNT	g	2412	Ant0	5.494	3.543	4	-11.42	20	Pass
NVNT	g	2442	Ant0	5.702	3.717	4	-7.07	20	Pass
NVNT	g	2472	Ant0	5.515	3.560	4	-10.99	20	Pass
NVNT	n20	2412	Ant0	5.814	3.814	4	-4.65	20	Pass
NVNT	n20	2442	Ant0	5.653	3.675	4	-8.12	20	Pass
NVNT	n20	2472	Ant0	5.275	3.369	4	-15.78	20	Pass

EIRP Antenna Power

Condition	Mode	Frequency (MHz)	Antenna Power (dBm/MHz)	Gain (dBi)	EIRP Power (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	5.405	5.02	10.425	12.14	Pass
NVNT	b	2442	5.441	5.02	10.461	12.14	Pass
NVNT	b	2472	5.838	5.02	10.858	12.14	Pass
NVNT	g	2412	5.494	5.02	10.514	12.14	Pass
NVNT	g	2442	5.702	5.02	10.722	12.14	Pass
NVNT	g	2472	5.515	5.02	10.535	12.14	Pass
NVNT	n20	2412	5.814	5.02	10.834	12.14	Pass
NVNT	n20	2442	5.653	5.02	10.673	12.14	Pass
NVNT	n20	2472	5.275	5.02	10.295	12.14	Pass

Note:

1.Declared Power by manufacturer.

2.Antenna power tolerance(%)=(Antenna power-declared power)/declared power*100%

3.EIRP (dBm/MHz) = $\log_{10}$ Antenna power(mW/MHz)+Antenna Gain

8. INTERFERENCE PREVENTION FUNCTION

8.1 Limit

According to Item 19 of Article 2 Paragraph 1. The device shall have the function of automatic transmission or reception of identification code.

8.2 Measurement Procedure

1. Set the EUT in the usual operation condition
2. The radio equipment with automatic transmitting function of identification code
 - A. Transmit the assigned identification code from the radio equipment.
 - B. Confirm the identification code received by the demodulator.
3. The radio equipment with automatic receiving function of identification code
 - A. Transmit the assigned identification code from the opposite equipment.
 - B. Confirm that the usual communication is available.
 - C. Transmit the identification code distinct from the assigned one from the opposite equipment.
 - D. Confirm that the radio equipment is stopped or an indication is displayed as the identification code is different.
4. The identification function shall be recorded with “Good” or “No”.

8.3 Test Result

Test Item	Test Result	Verdict
Transmitting Function of Identification Code	The device have the function of automatic transmission or reception of identification code	Pass
Receiving Function of Identification Code	The device have the function of automatic transmission or reception of identification code	Pass

Mac address:16:06:31:09:8e:f6



9. PHOTOGRAPHS OF TEST SET-UP

For photographs of the test set-up, refer to report No.RKEYS251201190.

10. PHOTOGRAPHS OF THE EUT

For photographs of the EUT, refer to report No.RKEYS251201190.

****End of Report****