

Conducted Bandedge Average Table

Antenna Gain: 13dBi									
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Duty Cycle Correction (dB)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	-58.7		0.0	-45.7	-41.25	4.43
	Non HT20, 6 to 54 Mbps	2	13	-59.6	-56.4	0.0	-41.7	-41.25	0.43
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-59.6	-56.4	0.0	-41.7	-41.25	0.43
	HT/VHT20, M0 to M7	1	13	-58.2		0.0	-45.2	-41.25	3.93
	HT/VHT20, M0 to M7	2	13	-59.3	-56.0	0.0	-41.3	-41.25	0.07
	HT/VHT20, M8 to M15	2	13	-59.3	-56.0	0.0	-41.3	-41.25	0.07
	HT/VHT20 Beam Forming, M0 to M7	2	13	-59.3	-56.0	0.0	-41.3	-41.25	0.07
	HT/VHT20 Beam Forming, M8 to M15	2	13	-59.3	-56.0	0.0	-41.3	-41.25	0.07
	HT/VHT20 STBC, M0 to M7	2	13	-59.3	-56.0	0.0	-41.3	-41.25	0.07
5190	Non HT40, 6 to 54 Mbps	1	13	-56.3		0.0	-43.3	-41.25	2.03
	Non HT40, 6 to 54 Mbps	2	13	-59.2	-56.2	0.0	-41.4	-41.25	0.16
	HT/VHT40, M0 to M7	1	13	-54.9		0.1	-41.8	-41.25	0.59
	HT/VHT40, M0 to M7	2	13	-62.0	-56.2	0.1	-42.1	-41.25	0.88
	HT/VHT40, M8 to M15	2	13	-62.0	-56.2	0.1	-42.1	-41.25	0.88
	HT/VHT40 Beam Forming, M0 to M7	2	13	-62.0	-56.2	0.1	-42.1	-41.25	0.88
	HT/VHT40 Beam Forming, M8 to M15	2	13	-62.0	-56.2	0.1	-42.1	-41.25	0.88
	HT/VHT40 STBC, M0 to M7	2	13	-62.0	-56.2	0.1	-42.1	-41.25	0.88
5210	Non HT80, 6 to 54 Mbps	1	13	-56.1		0.0	-43.1	-41.25	1.83
	Non HT80, 6 to 54 Mbps	2	13	-60.9	-56.5	0.0	-42.1	-41.25	0.88
	VHT80, M0 to M9 1ss	1	13	-55.1		0.1	-42.0	-41.25	0.74
	VHT80, M0 to M9 1ss	2	13	-59.7	-59.2	0.1	-43.3	-41.25	2.07
	VHT80, M0 to M9 2ss	2	13	-59.7	-59.2	0.1	-43.3	-41.25	2.07
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-59.7	-59.2	0.1	-43.3	-41.25	2.07
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-59.7	-59.2	0.1	-43.3	-41.25	2.07
	VHT80 STBC, M0 to M9 1ss	2	13	-59.7	-59.2	0.1	-43.3	-41.25	2.07


Conducted Band edge Peak Table

Antenna Gain: 13dBi

Page No: 63 of 109

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	-45.0		-32.0	-21.25	10.73
	Non HT20, 6 to 54 Mbps	2	13	-47.8	-46.0	-30.8	-21.25	9.52
	Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-47.8	-46.0	-30.8	-21.25	9.52
	HT/VHT20, M0 to M7	1	13	-41.8		-28.8	-21.25	7.53
	HT/VHT20, M0 to M7	2	13	-45.0	-45.0	-29.0	-21.25	7.72
	HT/VHT20, M8 to M15	2	13	-45.0	-45.0	-29.0	-21.25	7.72
	HT/VHT20 Beam Forming, M0 to M7	2	13	-45.0	-45.0	-29.0	-21.25	7.72
	HT/VHT20 Beam Forming, M8 to M15	2	13	-45.0	-45.0	-29.0	-21.25	7.72
	HT/VHT20 STBC, M0 to M7	2	13	-45.0	-45.0	-29.0	-21.25	7.72
5190	Non HT40, 6 to 54 Mbps	1	13	-43.2		-30.2	-21.25	8.93
	Non HT40, 6 to 54 Mbps	2	13	-48.0	-46.7	-31.3	-21.25	10.02
	HT/VHT40, M0 to M7	1	13	-40.0		-26.9	-21.25	5.69
	HT/VHT40, M0 to M7	2	13	-44.7	-37.8	-23.9	-21.25	2.69
	HT/VHT40, M8 to M15	2	13	-44.7	-37.8	-23.9	-21.25	2.69
	HT/VHT40 Beam Forming, M0 to M7	2	13	-44.7	-37.8	-23.9	-21.25	2.69
	HT/VHT40 Beam Forming, M8 to M15	2	13	-44.7	-37.8	-23.9	-21.25	2.69
	HT/VHT40 STBC, M0 to M7	2	13	-44.7	-37.8	-23.9	-21.25	2.69
5210	Non HT80, 6 to 54 Mbps	1	13	-45.6		-32.6	-21.25	11.33
	Non HT80, 6 to 54 Mbps	2	13	-48.4	-46.7	-31.4	-21.25	10.18
	VHT80, M0 to M9 1ss	1	13	-46.0		-32.9	-21.25	11.64
	VHT80, M0 to M9 1ss	2	13	-50.4	-41.2	-27.6	-21.25	6.35
	VHT80, M0 to M9 2ss	2	13	-50.4	-41.2	-27.6	-21.25	6.35
	VHT80 Beam Forming, M0 to M9 1ss	2	13	-50.4	-41.2	-27.6	-21.25	6.35
	VHT80 Beam Forming, M0 to M9 2ss	2	13	-50.4	-41.2	-27.6	-21.25	6.35
	VHT80 STBC, M0 to M9 1ss	2	13	-50.4	-41.2	-27.6	-21.25	6.35


Antenna Gain: 7dBi
Conducted Band edge Average, 5190 MHz, Non HT40, 6 to 54 Mbps

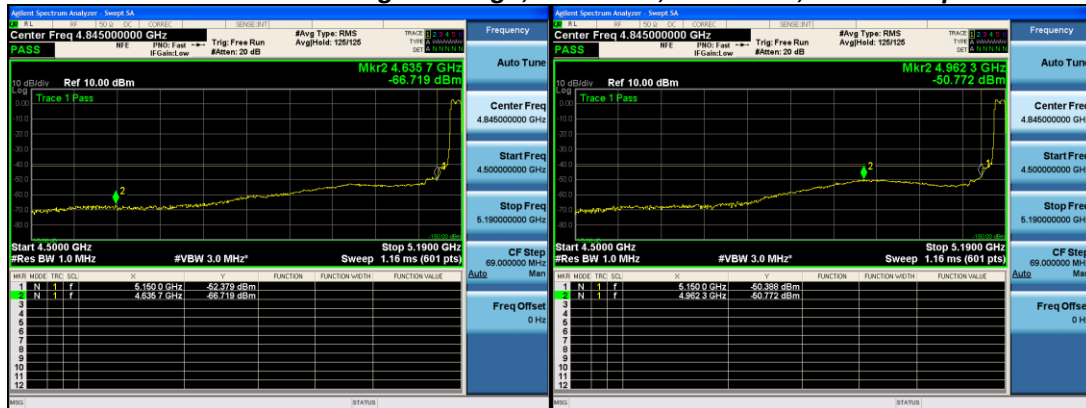

Antenna A

Antenna B


Antenna Gain: 7dBi
Conducted Band edge Peak, 5190 MHz, HT/VHT40 Beam Forming, M0 to M7

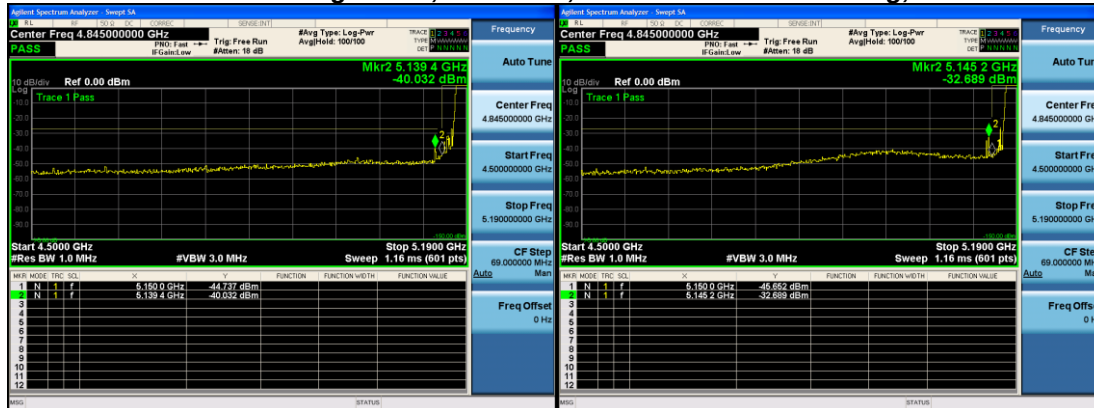


Antenna A

Antenna B

Antenna Gain: 13dBi
Conducted band edge Average, 5180 MHz, HT/VHT20, M0 to M7

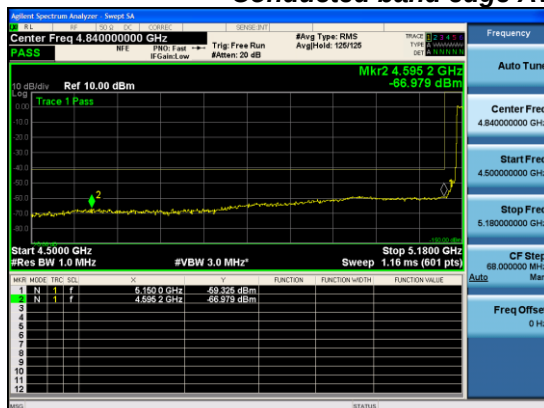


Antenna A

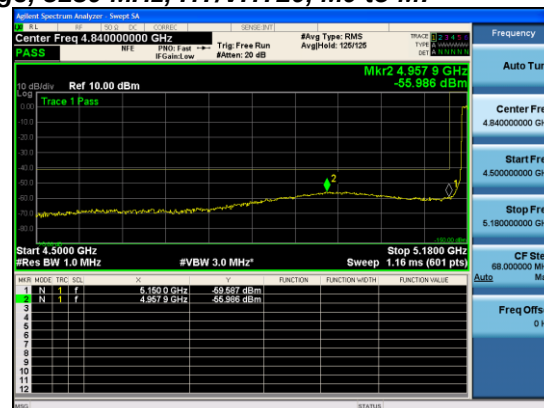


Antenna B

Antenna Gain: 13dBi
Conducted band edge Peak, 5190 MHz, HT/VHT40, M0 to M7

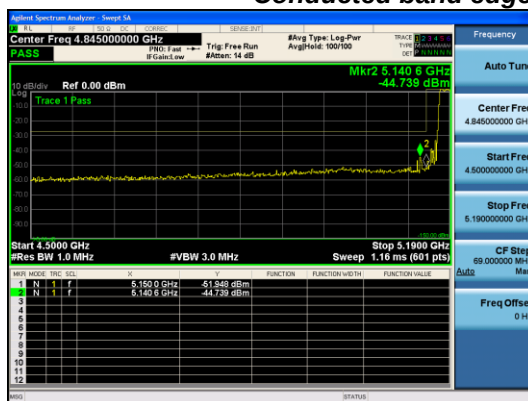

Antenna A

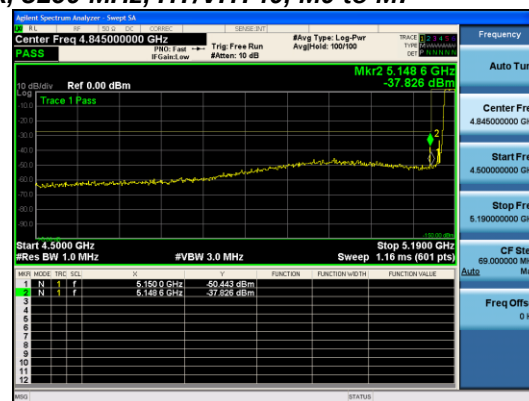

Antenna B


Appendix B: Radiated Spurious and AC Conducted Emissions


Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

B.1 Radiated Spurious Emissions

B1.1 Setup Diagram

Below 1G (Preamp used is optional)

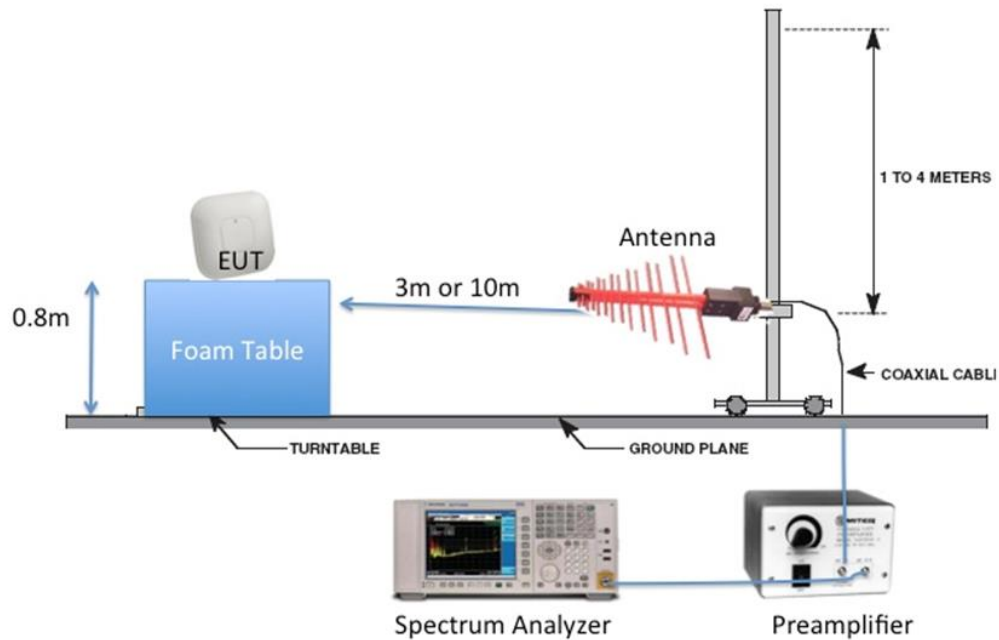

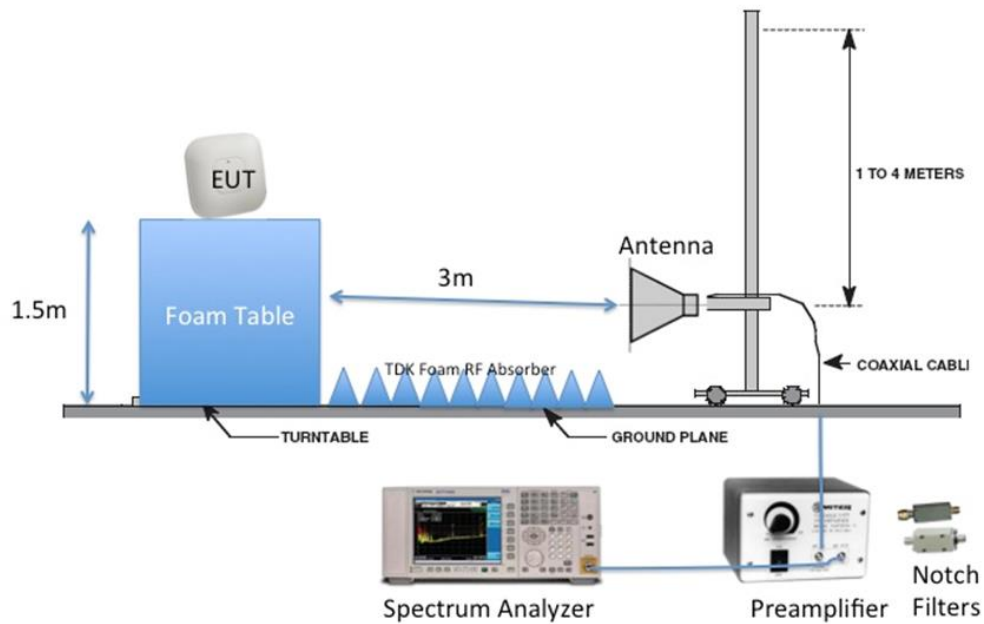Above 1G

B1.2 Restricted Bands

15.407 (b) (7), **LP0002:2.7** The provisions of 15.205 apply to intentional radiators operating under this section

15.205 (b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. Refer to limit section for detailed limits.

Restricted Bands for FCC			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Restricted Bands for LP0002			
MHz	MHz	MHz	MHz
0.090~0.110	108.00~138.00	1660.0~1785.0	8025.0~8500.0
0.490~0.510	149.90~150.05	1805.0~1880.0	9000.0~9200.0
2.172~2.198	156.70~156.90	1885.0~1900.0	9300.0~9500.0
3.013~3.033	162.01~167.17	1905.0~1985.0	10600~12700
4.115~4.198	167.72~173.20	2010.0~2025.0	13250~13400
5.670~5.690	240.00~285.00	2110.0~2170.0	14470~14500
6.200~6.300	322.00~335.40	2200.0~2300.0	15350~16200
8.230~8.400	399.90~410.00	2310.0~2390.0	17700~21400
12.265~12.600	485.00~510.00	2483.5~2900.0	22010~23120
13.340~13.430	608.00~614.00	3260.0~3267.0	23600~24000
14.965~15.020	703.00~748.00	3332.0~3339.0	31200~31800
16.700~16.755	758.00~803.00	3345.8~3358.0	36430~36500
19.965~20.020	825.00~915.00	3500.0~4400.0	Above 38600
25.500~25.700	930.00~1240.0	4500.0~5250.0	
37.475~38.275	1300.0~1427.0	5350.0~5460.0	
73.500~75.400	1435.0~1626.5	7250.0~7750.0	

RSS-Gen 8.10

(b) Unwanted emissions that fall into restricted bands of [Table 6](#) shall comply with the limits specified in RSS-Gen.

(c) Unwanted emissions that do not fall within the restricted frequency bands of [Table 6](#) shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Table 6 Restricted Bands

MHz	MHz	GHz
0.090-0.110	74.8-75.2	9.0-9.2
2.1735-2.1905	108-138	9.3-9.5
3.020-3.026	156.52475-156.52525	10.6-12.7
4.125-4.128	156.7-156.9	13.25-13.4
4.17725-4.17775	240-285	14.47-14.5
4.20725-4.20775	322-335.4	15.35-16.2
5.677-5.683	399.9-410	17.7-21.4
6.215-6.218	608-614	22.01-23.12
6.26775-6.26825	960-1427	23.6-24.0
6.31175-6.31225	1435-1626.5	31.2-31.8
8.291-8.294	1645.5-1646.5	36.43-36.5
8.362-8.366	1660-1710	Above 38.6
8.37625-8.38675	1718.8-1722.2	*
8.41425-8.41475	2200-2300	
12.29-12.293	2310-2390	
12.51975-12.52025	2655-2900	
12.57675-12.57725	3260-3267	
13.36-13.41	3332-3339	
16.42-16.423	3345.8-3358	
16.69475-16.69525	3500-4400	
16.80425-16.80475	4500-5150	
25.5-25.67	5350-5460	
37.5-38.25	7250-7750	
73-74.6	8025-8500	

B1.3 Limits

Below 1 GHz

FCC 15.209, LP0002:2.8

The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the table specified in the table in FCC§15.209(a).

FCC15.407, LP0002:2.8

(b) (6) Unwanted emissions below 1GHz must comply with general field strength limits set forth in §15.209.

RSS-Gen 8.9: Except when the requirements applicable to a given device state otherwise, emissions from license-exempt transmitters shall comply with the field strength limits shown in Table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

General Field Strength Limits Table			
Frequency (MHz)	Field strength (uV/meter)	Field strength (dBuV/meter)	Measurement distance (meters)
30-88	100**	40 Qp	3
88-216	150**	43.5 Qp	3
216-960	200**	46 Qp	3
Above 960	500	54 Av / 74 Pk	3

Above 1 GHz

15.407 (b), LP0002:4.7.4.1 *Undesirable emission limits.* Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

RSS-247 6.2.1.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

Limit Conversion (power to field strength)

The field strength limit in dBμV can be converted from power (logarithmic) by using the field strength (linear) approach formula as follows:

$$V/m = \frac{\sqrt{30 \times P_t \times g_t}}{d}$$

where: **pt**= transmitter output power in watts,
gt= numeric gain of the transmitting antenna (unit less),
E = electric field strength in V/m,
d = measurement distance in meters (m).

From the equation above, unit conversion from log => linear with a known power limit of -27 dBm.

(1) Conversion from dBm to Watt

$$\text{dBm to Watts } W = 10^{((\text{dBm} - 30)/10)}$$

$$\begin{aligned} P(W) &= 10^{(-27 - 120) / 20} \\ &= 10^{-5.7} \\ &= 1.995 \times 10^{-6} \end{aligned}$$

(2) Convert from Watt to field strength

- a. Convert from Watt to V/m @ 3m distance

$$\begin{aligned} V/m &= \frac{\sqrt{30 \times P_t \times g_t}}{3} \\ &= \frac{\sqrt{30 \times 0.000001995 \times 1}}{3} \\ &= 0.00257 \end{aligned}$$

- b. Convert field strength to power density (V/m to dBμV/m)

$$\begin{aligned} \text{dB}\mu\text{V/m} &= 20 \log (V/m) + 120 \\ &= 68.2 \end{aligned}$$

Mode Setting#	Wi-Fi Worst Case Mode	Modulation	Data Rate
1 (single antenna)	802.11a*	OFDM	6 Mbps
6 (dual antenna)	802.11n (HT40) *	OFDM	(MCS0)

Tested By: Test Engineer(s): Farida Rahmanzai, Jose Huamani	Date of testing: Date of testing: 18-Sept-2019 - 02-Oct-2019
Test Result: PASS	

B1.4 Test Procedure**Ref.** ANSIC63.10-2013 section 6.5 & 6.6, Cisp16-1-1

ANSI C63.10: 2013 section 4.1.4 / section 12.7.5 (Quasi-Peak), section 12.7.6 (peak), section 12.7.7.3 (average)

Test parameters

- (i) Span = Entire frequency range or segment if necessary.
- (ii) Reference Level = 80 dBuV
- (iii) RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)
- (iv) VBW $\geq 3 \times$ RBW
- (v) Detector = Peak & Quasi-Peak (frequency range 30 MHz to 1 GHz);
Peak & Average (frequency range above 1 GHz); Change VBW to 10 Hz for average measurement
- (vi) Sweep Time = Couple

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

30MHz – 18GHz,

Save plots: Peak plot (Vertical and Horizontal) @3m

Above 18 GHz,


Save plots: Peak plot (Vertical and Horizontal) @1m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
Also measure any emissions in the restricted bands.

Note: The data displayed on the plots detailed in the graphical test results section were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements.

B1.5 TX Radiated Spurious Emissions Graphical Data Results

Subtest Date:	03-Oct-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	30MHz - 1GHz
Comments on the above Test Results	802.11a, Tx Channel 36 (5180 MHz) (Worst case)

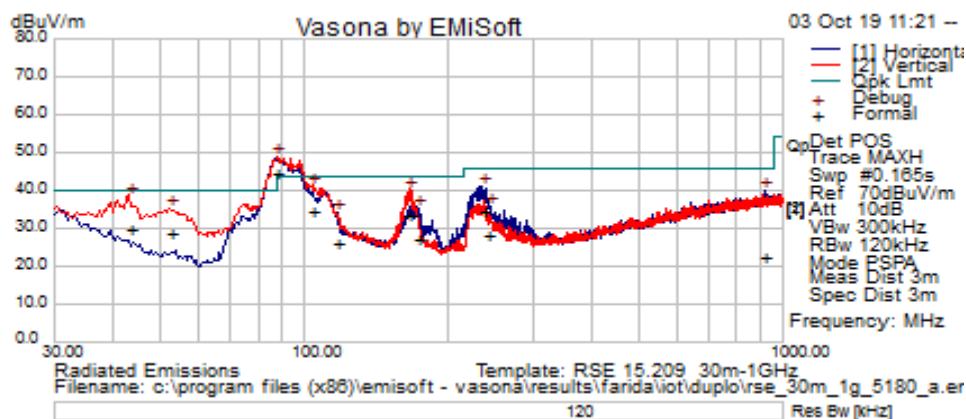

Title: TX Spurious Emissions from 30MHz-1GHz – Ch36 (5180 MHz)


Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarit y	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
87.532	36.03	0.98	7.5	44.51	Quasi Max	H	211	116	50*	-5.49	Pass	See notes
43.22975	17.82	0.68	11.56	30.06	Quasi Max	V	117	148	40	-9.94	Pass	
103.868	22.43	1.06	10.96	34.45	Quasi Max	H	294	131	43.5	-9.05	Pass	
165.1568	20.55	1.36	11.78	33.69	Quasi Max	V	100	195	43.5	-9.81	Pass	
52.4445	20.51	0.79	7.41	28.7	Quasi Max	V	120	107	40	-11.3	Pass	
235.1743	21.33	1.6	11.5	34.43	Quasi Max	H	102	214	46	-11.57	Pass	
912.3215	-2.88	3.16	22.2	22.48	Quasi Max	V	394	139	46	-23.52	Pass	
172.6913	14.64	1.39	11.23	27.27	Quasi Max	H	186	18	43.5	-16.23	Pass	
116.4638	11.88	1.14	13.39	26.4	Quasi Max	V	163	58	43.5	-17.1	Pass	
242.496	14.84	1.62	11.7	28.16	Quasi Max	H	103	192	46	-17.84	Pass	

Note1: 87.53MHz is determined to be non-radio related signal. FCC part15.109 class A limit applied. Also see FCC Part15.109 test report.

Note2: * means FCC part15.109 class A limit.

Subtest Date:	03-Oct-2019
---------------	-------------

Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	30MHz - 1GHz
Comments on the above Test Results	802.11a, Tx Channel 44 (5220 MHz) (Worst case)

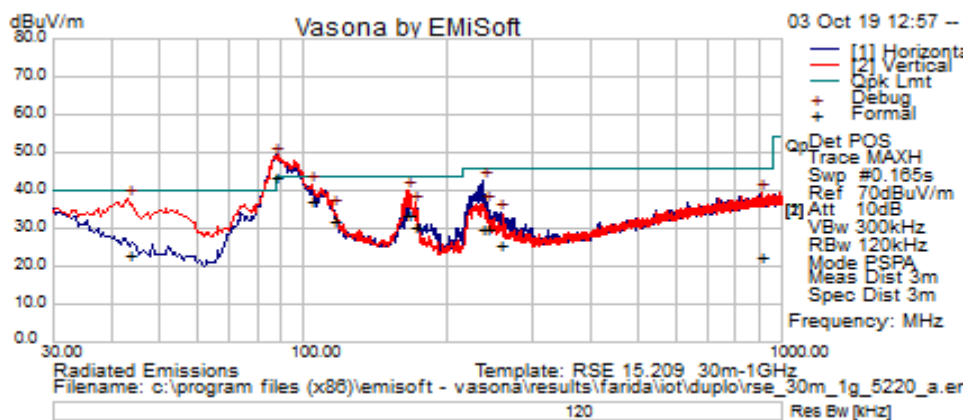

Title: TX Spurious Emissions from 30MHz-1GHz – Ch44 (5220 MHz)

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarit y	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Result s Pass / Fail	Comment s
87.61925	34.87	0.98	7.5	43.35	Quasi Max	H	208	85	50*	-6.65	Pass	See notes
104.2818	25.05	1.06	11.06	37.17	Quasi Max	V	123	132	43.5	-6.33	Pass	
43.072	10.83	0.68	11.66	23.17	Quasi Max	V	269	207	40	-16.83	Pass	
164.7975	20.33	1.36	11.8	33.49	Quasi Max	V	101	177	43.5	-10.01	Pass	
237.2633	16.53	1.61	11.6	29.74	Quasi Max	H	166	209	46	-16.26	Pass	
905.612	-2.92	3.16	22.1	22.34	Quasi Max	H	161	230	46	-23.66	Pass	
170.4845	17.44	1.38	11.35	30.17	Quasi Max	H	115	213	43.5	-13.33	Pass	
115.3523	17.41	1.13	13.24	31.77	Quasi Max	H	244	221	43.5	-11.73	Pass	
242.4548	16.74	1.62	11.7	30.06	Quasi Max	H	114	207	46	-15.94	Pass	
258.743	12.1	1.68	11.87	25.65	Quasi Max	H	107	125	46	-20.35	Pass	


Note1: 87.62MHz is determined to be non-radio related signal. FCC part15.109 class A limit applied.

Also see FCC Part15.109 test report.

Note2: * means FCC part15.109 class A limit.

Subtest Date:	03-Oct-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic

Subtest Title	Transmitter Spurious Emissions
Frequency Range	30MHz - 1GHz
Comments on the above Test Results	802.11a, Tx Channel 48 (5240 MHz) (Worst case)

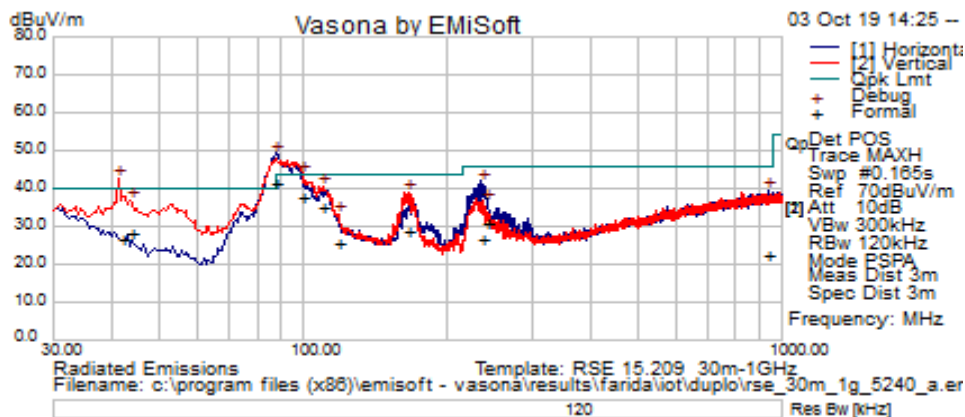

Title: TX Spurious Emissions from 30MHz-1GHz – Ch48 (5240 MHz)


Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
87.2255	33.26	0.98	7.5	41.73	Quasi Max	H	257	78	50*	-8.27	Pass	See notes
41.642	13.27	0.67	12.75	26.69	Quasi Max	V	106	71	40	-13.31	Pass	
99.67525	26.66	1.03	9.84	37.53	Quasi Max	V	121	142	43.5	-5.97	Pass	
109.9983	21.85	1.1	12.2	35.15	Quasi Max	H	223	210	43.5	-8.35	Pass	
43.59775	16.17	0.68	11.34	28.19	Quasi Max	V	171	127	40	-11.81	Pass	
235.5163	13.84	1.6	11.5	26.94	Quasi Max	H	186	94	46	-19.06	Pass	
165.7375	15.89	1.37	11.73	28.98	Quasi Max	H	111	201	43.5	-14.52	Pass	
934.7258	-2.99	3.19	22.4	22.6	Quasi Max	V	141	257	46	-23.4	Pass	
242.1415	17.68	1.62	11.7	31	Quasi Max	H	129	220	46	-15	Pass	
118.0745	10.77	1.14	13.61	25.52	Quasi Max	V	107	336	43.5	-17.98	Pass	

Note1: 87.22MHz is determined to be non-radio related signal. FCC part15.109 class A limit applied.

Also see FCC Part15.109 test report.

Note2: * means FCC part15.109 class A limit.

Subtest Date:	26-Sep-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	802.11a, Tx Channel 36 (5180 MHz)

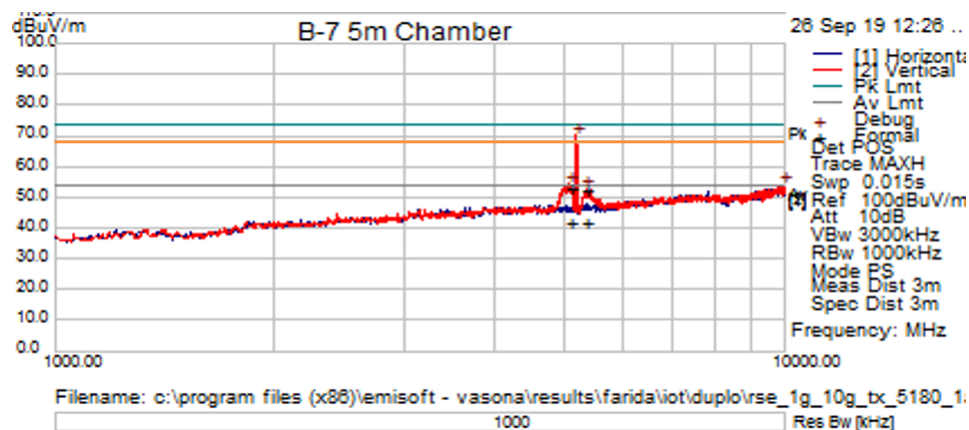


Title: TX Spurious Emissions from 1GHz-10GHz – Ch36 (5180 MHz)

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5173.75	66.88	9.02	-5.71	70.2	Peak	V	100	18	N/A	N/A	Ignored	Fundamental
5061.25	49.85	8.93	-5.83	52.95	Peak	V	107	15	68.2	-15.25	Pass	RB
5061.25	38.92	8.93	-5.83	42.02	Average	V	107	15	54	-11.98	Pass	RB
5336.875	48.73	9.19	-5.53	52.39	Peak	V	115	21	68.2	-15.81	Pass	RB
5336.875	38.16	9.19	-5.53	41.82	Average	V	115	21	54	-12.18	Pass	RB

Note: RB means restricted band

Subtest Date:	26-Sep-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	802.11a, Tx Channel 44 (5220 MHz)

Subtest Date:	26-Sep-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	802.11a, Tx Channel 44 (5220 MHz)

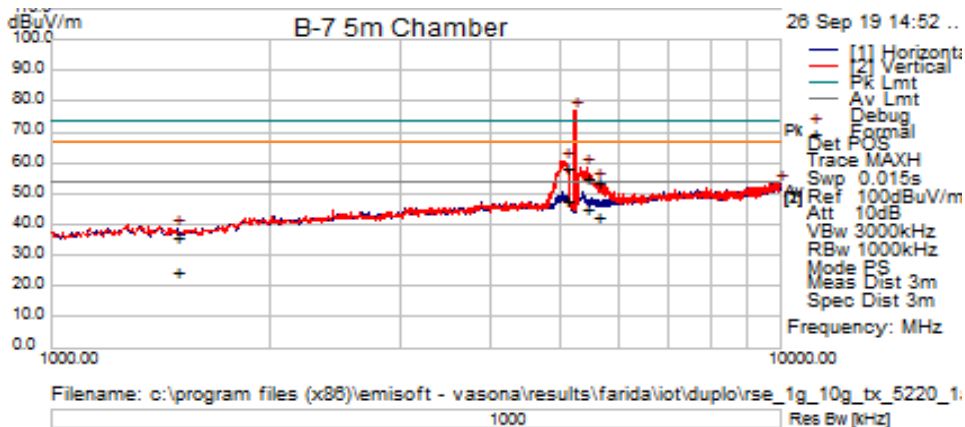


Title: TX Spurious Emissions from 1GHz-10GHz – Ch44 (5220 MHz)

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarit y	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Result s Pass / Fail	Comments
5224.375	73.95	9.06	-5.77	77.23	Peak	V	125	19	N/A	N/A	Ignored	Fundamental
5066.875	55.68	8.93	-5.87	58.75	Peak	V	163	19	68.2	-9.45	Pass	
5066.875	44.68	8.93	-5.87	47.75	Average	V	163	19	54	-6.25	Pass	
5426.875	51.73	9.25	-5.51	55.46	Peak	V	141	26	68.2	-12.74	Pass	RB
5426.875	41.21	9.25	-5.51	44.95	Average	V	141	26	54	-9.05	Pass	RB
5612.5	49.8	9.43	-5.32	53.9	Peak	V	125	24	68.2	-14.3	Pass	
5612.5	38.47	9.43	-5.32	42.58	Average	V	125	24	54	-11.42	Pass	

Note: RB means restricted band

Subtest Date:	26-Sep-2019
----------------------	-------------

Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	802.11a, Tx Channel 48 (5240 MHz)

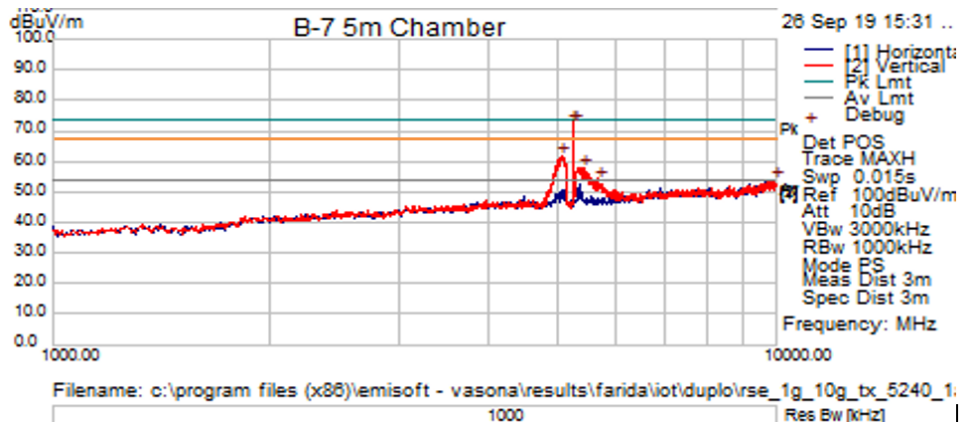


Title: TX Spurious Emissions from 1GHz-10GHz – Ch48 (5240 MHz)

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5246.875	69.54	9.09	-5.71	72.93	Peak	V	125	18	N/A	N/A	Ignored	Fundamental
5050	58.75	8.91	-5.87	61.8	Peak	V	110	21	68.2	-6.40	Pass	RB
5050	47.77	8.91	-5.87	50.81	Average	V	110	21	54	-3.19	Pass	RB
5404.375	51.81	9.24	-5.53	55.52	Peak	V	142	10	68.2	-12.68	Pass	RB
5404.375	40.46	9.24	-5.53	44.17	Average	V	142	10	54	-9.83	Pass	RB
5685.625	48.76	9.46	-5.22	53	Peak	V	119	18	68.2	-15.2	Pass	
5685.625	38.02	9.46	-5.22	42.26	Average	V	119	18	54	-11.74	Pass	

Note: RB means restricted band

Subtest Date:	23-Sep-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	802.11n40, Tx Channel 38 (5190 MHz)

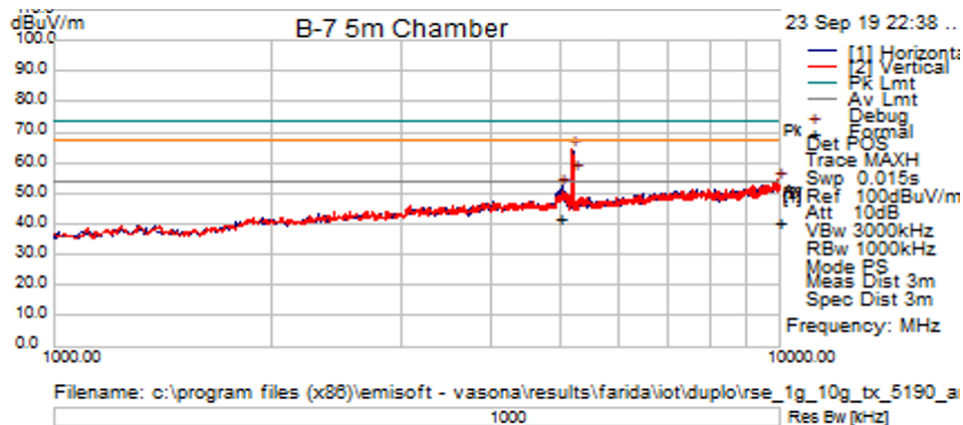


Title: TX Spurious Emissions from 1GHz-10GHz – Ch38 (5190 MHz)

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5173.75	61.15	9.02	-5.71	64.47	Peak	V	100	322	N/A	N/A	Ignored	Fundamental
5016.25	49.52	8.86	-5.91	52.48	Peak	H	100	316	68.2	-15.72	Pass	RB
4978.008	39.17	8.85	-5.99	42.03	Average	H	99	312	54	-11.97	Pass	RB

Note: RB means restricted band

Subtest Date:	23-Sep-2019
----------------------	-------------

Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1GHz - 10GHz
Comments on the above Test Results	802.11n40, Tx Channel 46 (5230 MHz)

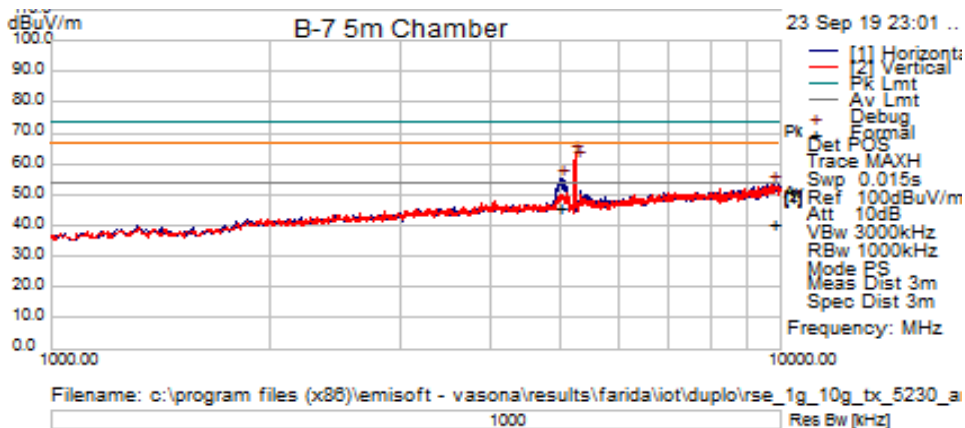


Title: TX Spurious Emissions from 1GHz-10GHz – Ch46 (5230 MHz)

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5224.375	59.99	9.06	-5.77	63.27	Peak	V	150	309	N/A	N/A	Ignored	Fundamental
5246.875	57.91	9.09	-5.71	61.29	Peak	H	100	316	N/A	N/A	Ignored	Fundamental
5016.25	52.41	8.86	-5.91	55.36	Peak	H	100	308	68.2	-12.84	Pass	RB
4972.98	42.86	8.84	-6	45.69	Average	H	110	315	54	-8.31	Pass	RB


Note: RB means restricted band

Subtest Date:	23-Sep-2019 - 24-Sep-2019
---------------	---------------------------

Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	10GHz - 18GHz
Comments on the above Test Results	802.11a, Tx Channel 36 (5180 MHz) 802.11n40, Tx Channel 38 (5190 MHz)

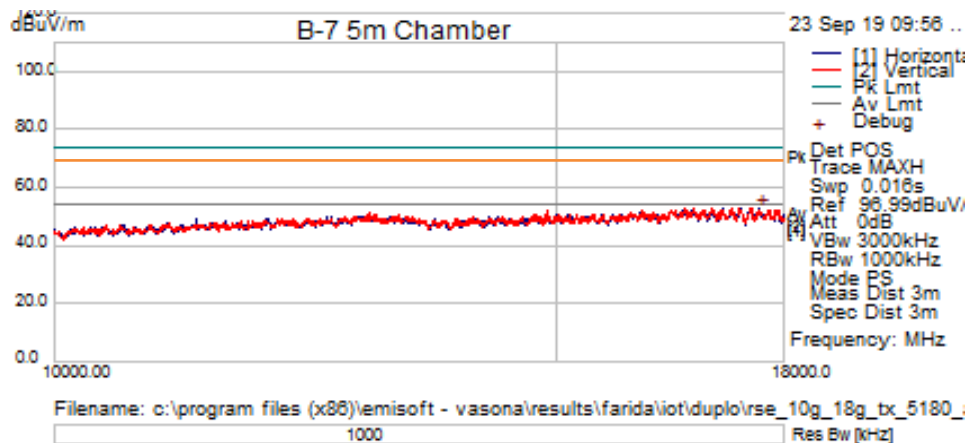


Title: TX Spurious Emissions from 10GHz-18GHz – Ch36 (5180 MHz)

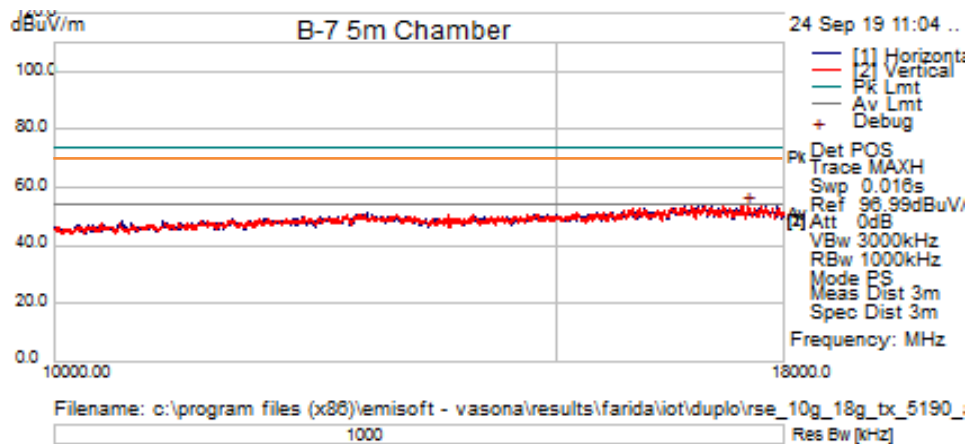


Title: TX Spurious Emissions from 10GHz-18GHz – Ch38 (5190 MHz)

Subtest Date:	20-Sep-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	10GHz - 18GHz
Comments on the above Test Results	802.11a, Tx Channel 44 (5220 MHz) 802.11n40, Tx Channel 46 (5230 MHz)

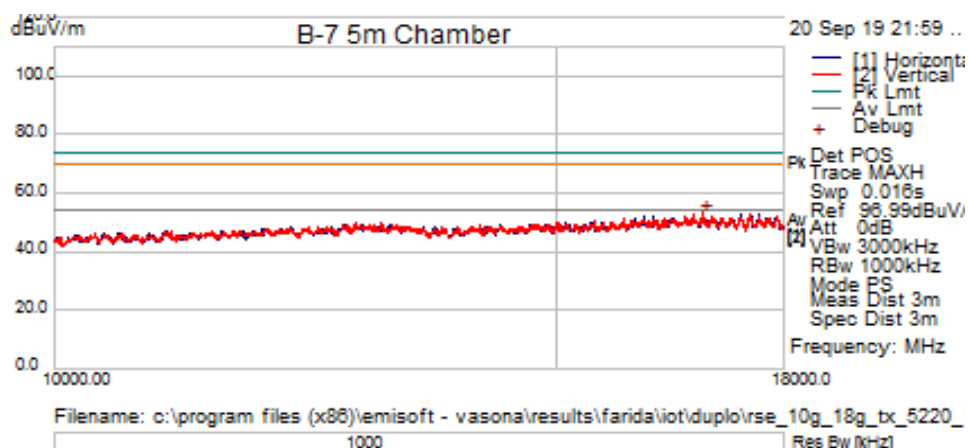


Title: TX Spurious Emissions from 10GHz-18GHz – Ch44 (5220 MHz)

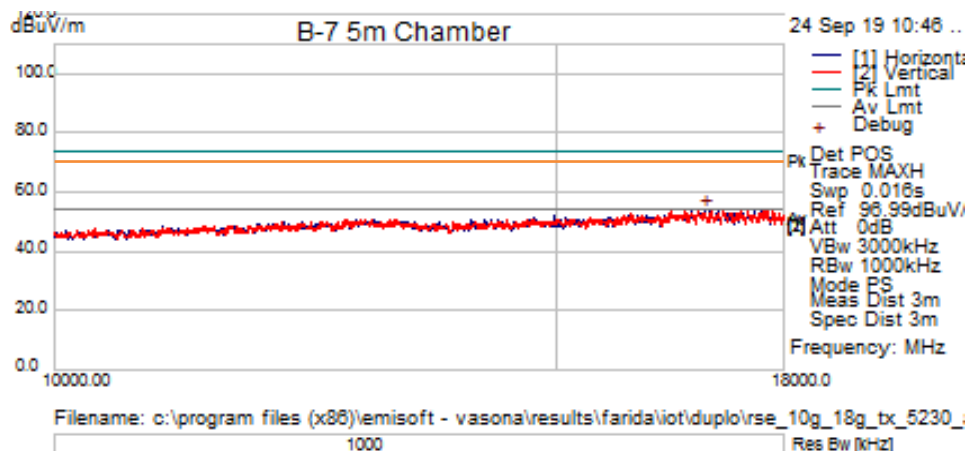

Title: TX Spurious Emissions from 10GHz-18GHz – Ch46 (5230 MHz)


Subtest Date:	20-Sep-2019
---------------	-------------

Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	10GHz - 18GHz
Comments on the above Test Results	802.11a, Tx Channel 48 (5240 MHz)

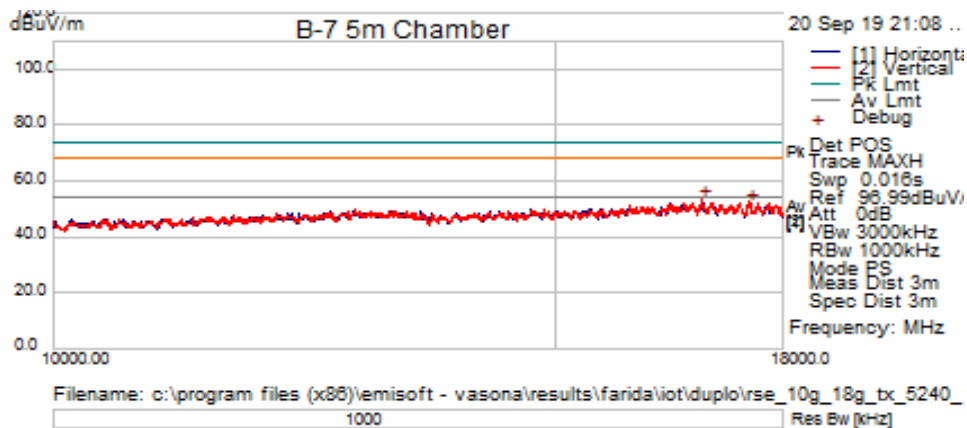


Title: TX Spurious Emissions from 10MHz-18GHz – Ch48 (5240 MHz)

Subtest Date:	08-Oct-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	18GHz - 40GHz
Comments on the above Test Results	802.11a , Tx Channel 44 (5220 MHz)

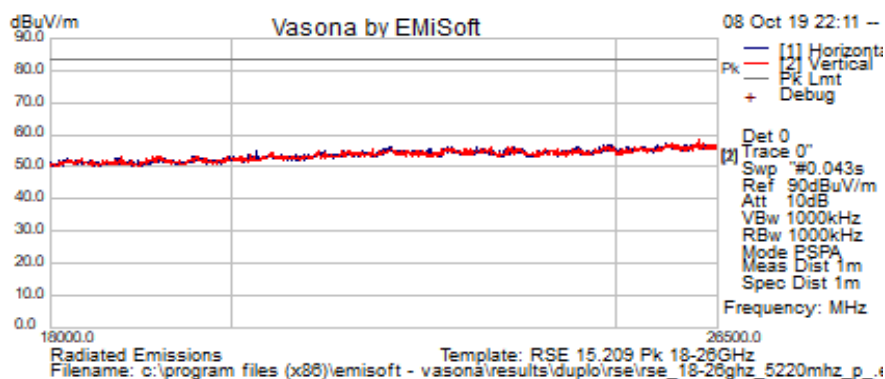


Title: TX Spurious Emissions from 18GHz-26.5GHz – Ch44 (5220 MHz)

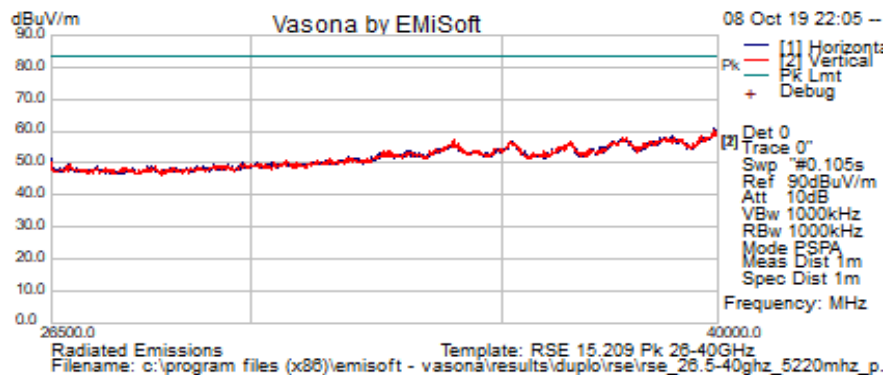


Title: TX Spurious Emissions from 26.5GHz-40GHz – Ch44 (5220 MHz)

Subtest Date:	08-Oct-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	18GHz - 40GHz
Comments on the above Test Results	802.11n40, Tx Channel 46 (5230 MHz)

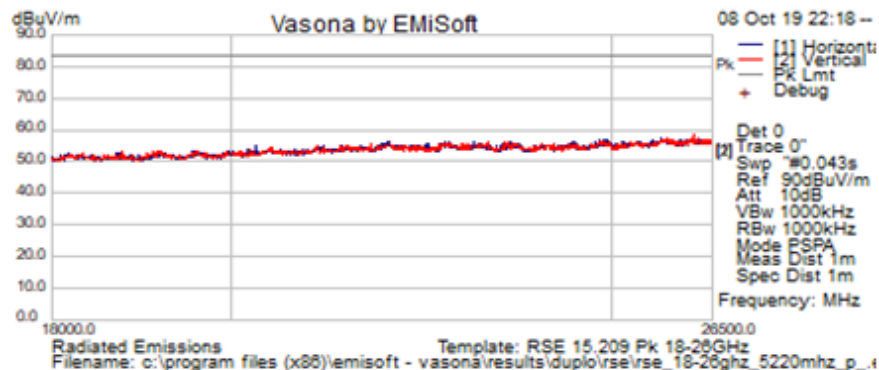

Title: TX Spurious Emissions from 18GHz-26.5GHz – Ch46 (5230 MHz)

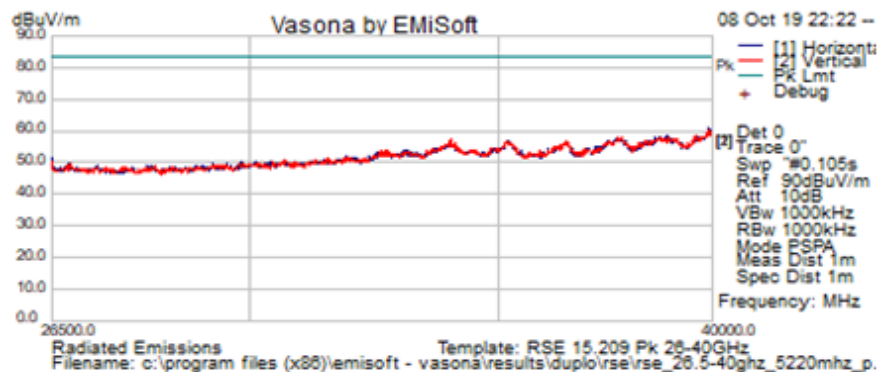

Title: TX Spurious Emissions from 26.5GHz-40GHz –Ch46 (5230 MHz)

B.2 AC Conducted Emissions

B2.1 Limits

FCC 15.207: (a) , **LP0002:2.3** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency of Emission (MHz)	Conducted Limits	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

RSS-Gen 8.8: Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4 (AC power-line conducted emissions limit), as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

B2.2 Test Procedures

Ref: C63.10:2013, section 6.2.2

Section 6.2.2 Measurement requirements

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument, or where permitted or required, the emission currents on the power line sensed by a current probe. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer, and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements, using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having a 50 Ω input impedance. All other ports are terminated in 50 Ω loads. Figure 5, Figure 6, and Figure 7 show typical test setups for ac powerline conducted emissions testing (see 6.13). For information about the use of a RF-shielded (screen) room, vertical conducting plane and voltage probe, see ANSI C63.4.

Tabletop devices shall be placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screen) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

Section 6.2.5 Final ac power-line conducted emission measurements

Based on the exploratory tests of the EUT performed in 6.2.4, the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency.

Ref. C63.10-2013 section 6.2

Test Procedure

1. Using Vasona software, configure the spectrum analyzer as shown above (be sure to enter all losses between the transmitter output and the spectrum analyzer).
2. Set the radio in continuous transmit mode.
3. Connect cable end to LISN Hot port and other cable end to the spectrum Analyzer/EMC receiver RF input port. Terminate the LISN neutral port with a 50 Ω impedance terminator.
4. Sweep the frequency range from 150 kHz to 30 MHz (segment if necessary)
5. Use the peak marker function to determine the maximum amplitude level.
6. Center marker frequency and perform final measurement using applicable detector (Quasi-Pk/Average).
7. Record at least 6 highest reading for the worst case operating modes in Quasi-peak/Average.
8. Repeat the test on Neutral lead.
9. Repeat step 3 – 7 with the radio sets in the Receiver mode.
10. Record at least 6 highest reading in Quasi-peak/Average

Ref. C63.10-2013 section 4 / CISPR16-1-1

Test Parameters
Span = Entire frequency range or segment if necessary. Reference Level = 70 dBuV RBW = 9 kHz VBW $\geq 3 \times$ RBW Sweep Time = Couple Detector = Quasi-Peak & Average

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
2	EUT	IW-6300H with Air-ANT2513P4M-N antenna	☒	☐
	Support	IW-6300H-AC-X-K9 power supply	☐	☒

Mode Setting#	Wi-Fi Mode	Modulation	Data Rate
1 (single antenna)	802.11a*	BPSK	6 Mbps


Tested By: Test Engineer(s): Farida Rahmanzai, Jose Huamani	Date of testing: 12-Nov-2019
Test Result: PASS	

Test Equipment

See Appendix C for list of test equipment

B2.3 AC Conducted Emissions Test Data and Graphical Test Results


Subtest Date:	12-Nov-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, formal immunity room
Subtest Title	Conducted Emissions
Frequency Range	150 kHz - 30 MHz
Comments on the above Test Results	TX Ch44 (5220 MHz) with BPSK modulation – 6 Mbps

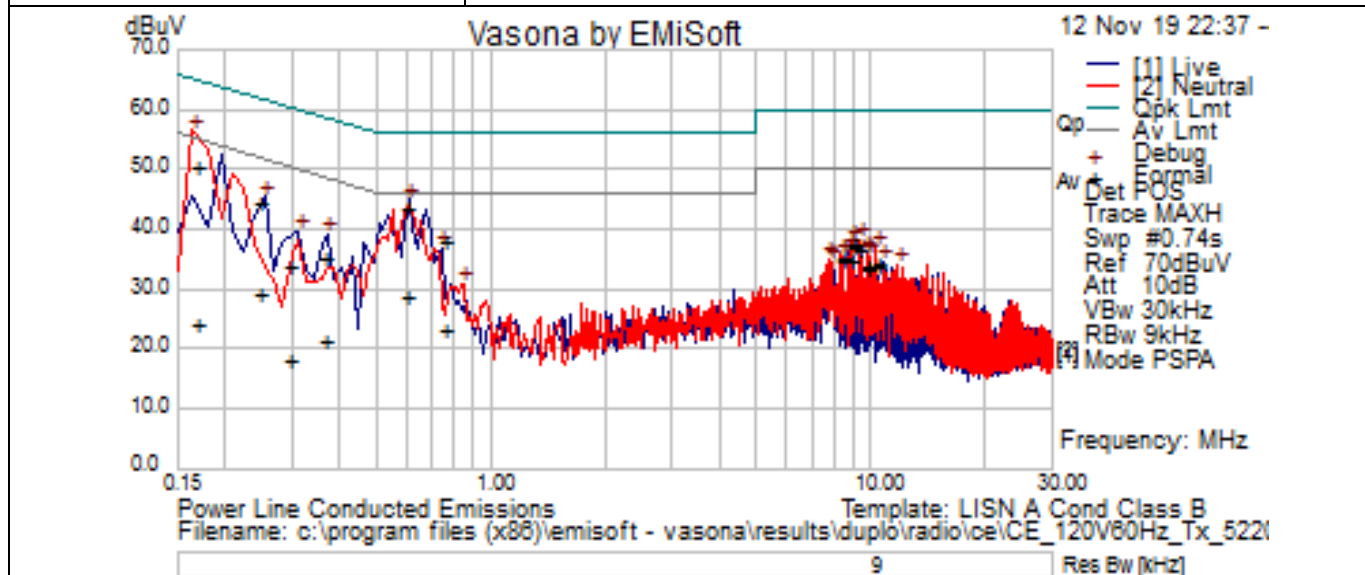

AC Conducted Emissions Test Result Tables for 802.11a / TX Ch44

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	Factors (dB)	Level (dBuV)	Detector	Lines (Live/Neutral)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
0.245313	23.93	20.66	0.08	44.67	Quasi Peak	Live	61.91	-17.24	Pass	TX / Ch 44
0.245313	8.51	20.66	0.08	29.26	Average	Live	51.91	-22.66	Pass	TX / Ch 44
0.296265	13.57	20.45	0.07	34.09	Quasi Peak	Live	60.35	-26.25	Pass	TX / Ch 44
0.296265	-2.2	20.45	0.07	18.32	Average	Live	50.35	-32.03	Pass	TX / Ch 44
0.366405	15.16	20.21	0.07	35.44	Quasi Peak	Live	58.58	-23.14	Pass	TX / Ch 44
0.366405	1.27	20.21	0.07	21.56	Average	Live	48.58	-27.03	Pass	TX / Ch 44
0.602217	23.79	19.98	0.07	43.84	Quasi Peak	Live	56	-12.16	Pass	TX / Ch 44
0.602217	9.05	19.98	0.07	29.09	Average	Live	46	-16.91	Pass	TX / Ch 44
0.750888	18.26	19.98	0.07	38.3	Quasi Peak	Live	56	-17.7	Pass	TX / Ch 44
0.750888	3.43	19.98	0.07	23.47	Average	Live	46	-22.53	Pass	TX / Ch 44
8.776758	14.73	20.13	0.11	34.97	Quasi Peak	Live	60	-25.03	Pass	TX / Ch 44


Subtest Date:	12-Nov-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, formal immunity room
Subtest Title	Conducted Emissions
Frequency Range	150 kHz - 30 MHz
Comments on the above Test Results	TX Ch44 (5220 MHz) with BPSK modulation – 6 Mbps

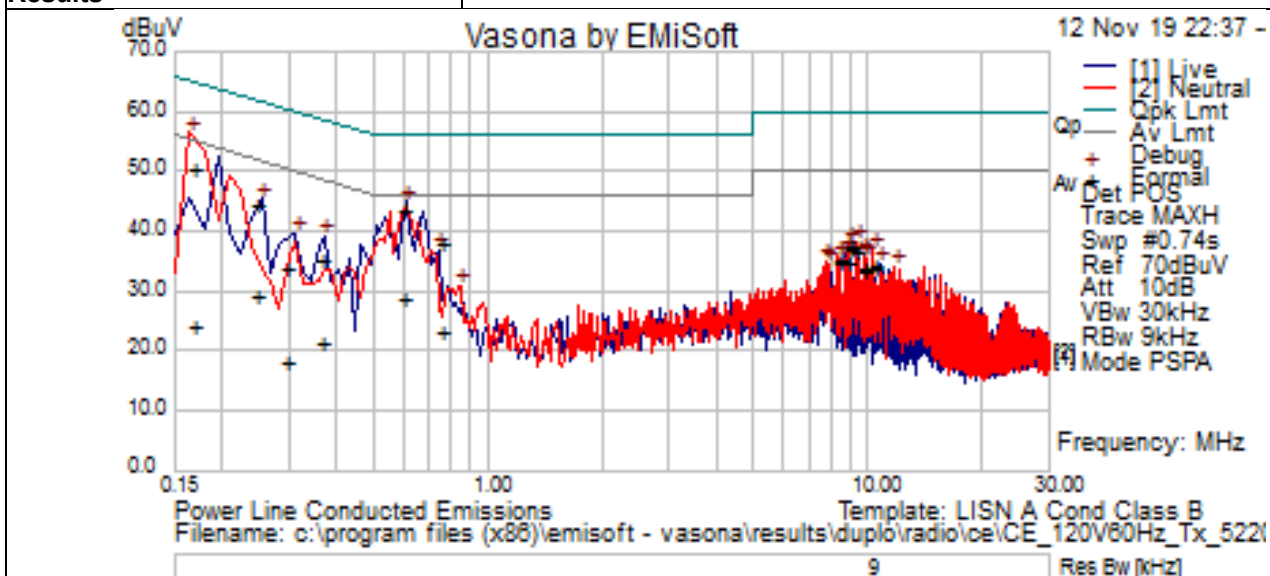

AC Conducted Emissions Test Result Tables for 802.11a / TX Ch44

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	Factors (dB)	Level (dBuV)	Detector	Lines (Live/Neutral)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
8.776758	14.5	20.13	0.11	34.74	Average	Live	50	-15.26	Pass	TX / Ch 44
0.168309	29.37	21.08	0.1	50.56	Quasi Peak	Neutral	65.04	-14.48	Pass	TX / Ch 44
0.168309	2.94	21.08	0.1	24.13	Average	Neutral	55.04	-30.91	Pass	TX / Ch 44
8.344041	15.15	20.13	0.08	35.36	Quasi Peak	Neutral	60	-24.64	Pass	TX / Ch 44
8.344041	14.75	20.13	0.08	34.96	Average	Neutral	50	-15.04	Pass	TX / Ch 44
8.919867	17.24	20.14	0.1	37.47	Quasi Peak	Neutral	60	-22.53	Pass	TX / Ch 44
8.919867	17.18	20.14	0.1	37.41	Average	Neutral	50	-12.59	Pass	TX / Ch 44
9.351399	16.69	20.14	0.11	36.94	Quasi Peak	Neutral	60	-23.06	Pass	TX / Ch 44
9.351399	16.48	20.14	0.11	36.73	Average	Neutral	50	-13.27	Pass	TX / Ch 44
9.781755	13.92	20.15	0.1	34.17	Quasi Peak	Neutral	60	-25.83	Pass	TX / Ch 44
9.781755	13.29	20.15	0.1	33.54	Average	Neutral	50	-16.46	Pass	TX / Ch 44
10.35859	14.29	20.16	0.1	34.55	Quasi Peak	Neutral	60	-25.45	Pass	TX / Ch 44

Subtest Date:	12-Nov-2019
Engineer	Farida Rahmanzai Jose Huamani
Lab Information	Building 7, formal immunity room
Subtest Title	Conducted Emissions
Frequency Range	150 kHz - 30 MHz
Comments on the above Test Results	TX Ch44 (5220 MHz) with BPSK modulation – 6 Mbps

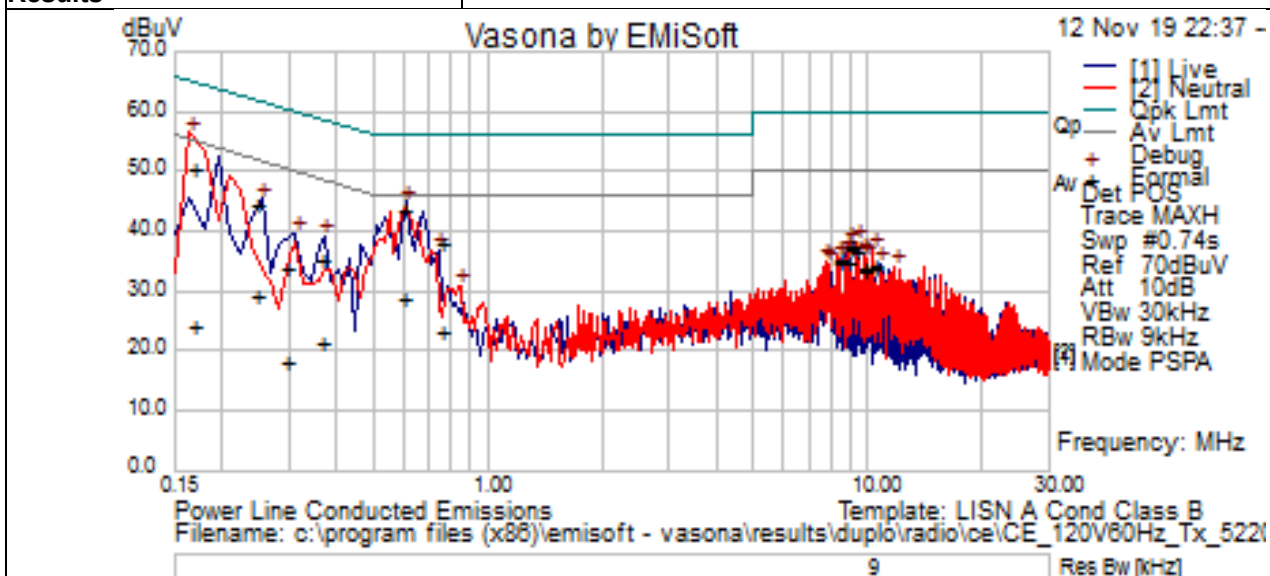

AC Conducted Emissions Test Result Tables for 802.11a / TX Ch44

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	Factors (dB)	Level (dBuV)	Detector	Lines (Live/Neutral)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
10.35859	13.81	20.16	0.1	34.07	Average	Neutral	50	-15.93	Pass	TX / Ch 44

Appendix B: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due
RF Conducted at output antenna port				
7329	OMEGA/CT485B	Chart Recorder	18 Feb. 2019	18 Feb. 2020
49516	Keysight (Agilent/HP) / N9030A	PXA Signal Analyzer, 3Hz to 50GHz	29 Nov. 2019	29 Nov. 2019
55097	National Instruments / PXI-1042	Chassis PXI	Cal Not Required	Cal Not Required
56089	National Instruments / PXI-2796	40GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use
56328	Pasternack / PE5019-1	Torque Wrench	13 Feb. 2019	13 Feb. 2020
57233	National Instruments / PXI-8115	Embedded Controller	Cal Not Required	Cal Not Required
57253	National Instruments / PXI-2796	40GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use
57254	National Instruments / PXI-2799	Switch 1x1	Verify Before Use	Verify Before Use
57479	CISCO / ATIL	Automation Test Insertion Loss System	Verify Before Use	Verify Before Use

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for Radiated Emissions					
CIS008113	Cisco/NSA 5m Chamber	NSA 5m Chamber	01-Oct-19	01-Oct-20	B1
CIS037581	ETS Lindgren / 3117	Double Ridged Guide Horn Antenna	25-Jan-19	25-Jan-20	B1
CIS039131	Cisco / TH0118	Mast Mount Preamplifier Array, 1-18GHz	25-Feb-19	25-Feb-20	B1
CIS038404	Sunol Sciences / JB1	Combination Bi-Log Antenna, 30MHz-2GHz	31-Jan-19	31-Jan-20	B1
CIS036710	Cisco/1840	18-40GHz EMI Test Head/Verification Fixture	12-Aug-19	12-Aug-20	B1
CIS018231	Rohde & Schwarz / ESI 40(ESIB 40)	EMI RECEIVER TEST 20Hz-40GHz	07-Mar-19	07-Mar-20	B1
CIS042012	Rohde & Schwarz / ESCI	EMI Test Receiver	12-Aug-19	12-Aug-20	B1
CIS040604	Agilent / E4440A	Precision Spectrum Analyzer	19-Oct-18	19-Oct-20	B1
CIS047311	Huber+ Suhner/Sucoflex 106PA	RF Coaxial Cable, to 18GHz, 8.5 m	30-Sep-19	30-Sep-20	B1
CIS055178	Huber+ Suhner/Sucoflex 106PA	RF Coaxial Cable, to 18GHz, 8.5 m	30-Sep-19	30-Sep-20	B1
CIS025660	Micro-Coax / UFB311A-1-0840-504504	RF Coaxial Cable, to 18GHz, 8.5 m	30-Sep-19	30-Sep-20	B1
CIS025640	Micro-Coax / UFB311A-0-2720-520520	Coaxial Cable, 272.0 in. to 18GHz	30-Sep-19	30-Sep-20	B1
CIS056056	Wainwright Instruments/ WRCJV8-5100-5150-5250-530 0-40SS	SMA Band Reject Filter 5.150GHz to 5.250GHz	10-Apr-19	10-Apr-20	B1
Test Equipment used for AC Conducted Emissions					
CIS41955	Rohde & Schwarz / ESCI	EMI Test Receiver	25-Apr-19	25-Apr-20	B2
CIS08187	Fisher Custom Com / FCC-450B-2.4-N	Pulse Limiter	15-May-19	15-May-20	B2
CIS019210	TTE / H785-150K-50-21378	High Pass Filter 150KHz	25-Feb-19	25-Feb-20	B2
CIS05039	Fisher Custom Com / 50/250-50-2-02	LISN (9kHz-30MHz)	21-Feb-19	21-Feb-20	B2
CIS034158	Fisher Custom Com / 50-2-RA-NEMA-5-20R	LISN Receptacle Adaptor	21-Feb-19	21-Feb-20	B2
CIS040532	Coleman / RG-223	25 ft RG-223 Cable	04-Dec-18	04-Dec-19	B2
51663	Bird / 5-T-MB	50Ω termination	04-Dec-18	04-Dec-19	B2

Appendix C: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1×10^3)
EN	European Norm	MHz	MegaHertz (1×10^6)
IEC	International Electro technical Commission	GHz	Gigahertz (1×10^9)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1×10^3)
L1	Line 1	μ V	Microvolt (1×10^{-6})
L2	Line2	A	Amp
L3	Line 3	μ A	Micro Amp (1×10^{-6})
DC	Direct Current	mS	Milli Second (1×10^{-3})
RAW	Uncorrected measurement value, as indicated by the measuring device	μ S	Micro Second (1×10^{-6})
RF	Radio Frequency	μ S	Micro Second (1×10^{-6})
SLCE	Signal Line Conducted Emissions	m	Meter
Measdist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

Appendix D: Photographs of Test Setups


Title: EUT Pictures





Appendix E: Photographs of Test Setups

Title: Radio Conducted Test Setup

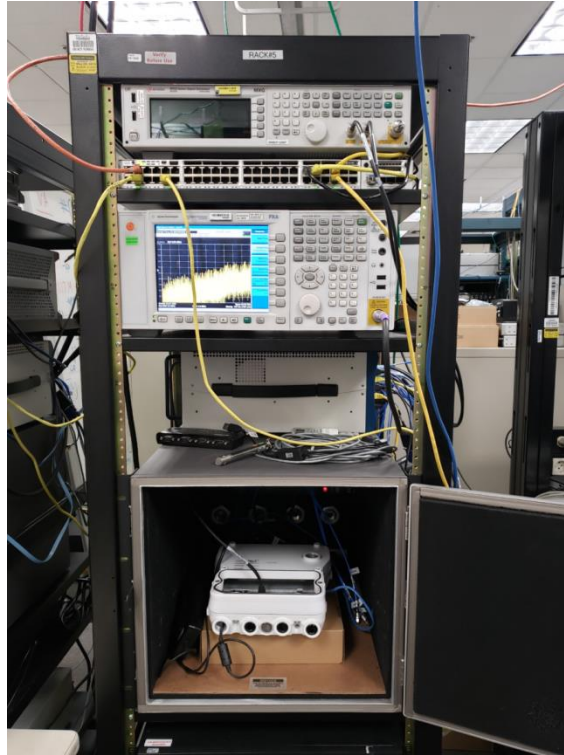





Title: Radiated Spurious Emissions Test Setup




Title: Radiated Spurious Emissions 30MHz-1GHz – Test Setup

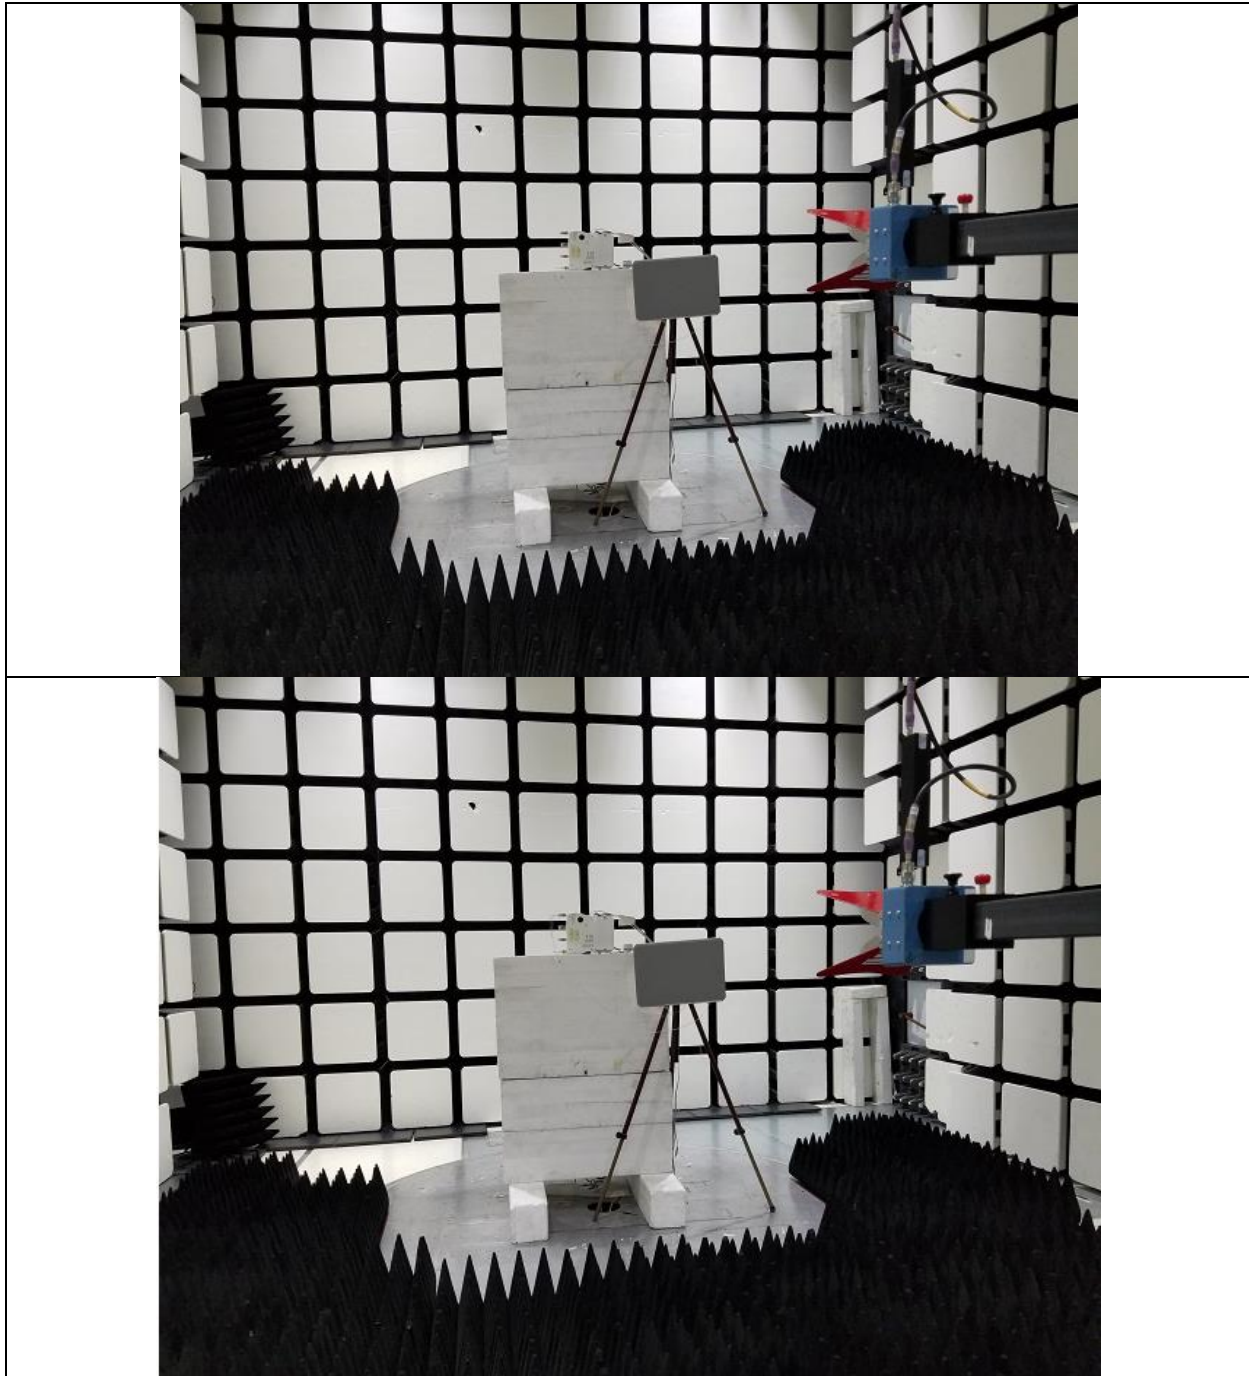

Title: Radiated Spurious Emissions 1GHz-18GHz – Test Setup

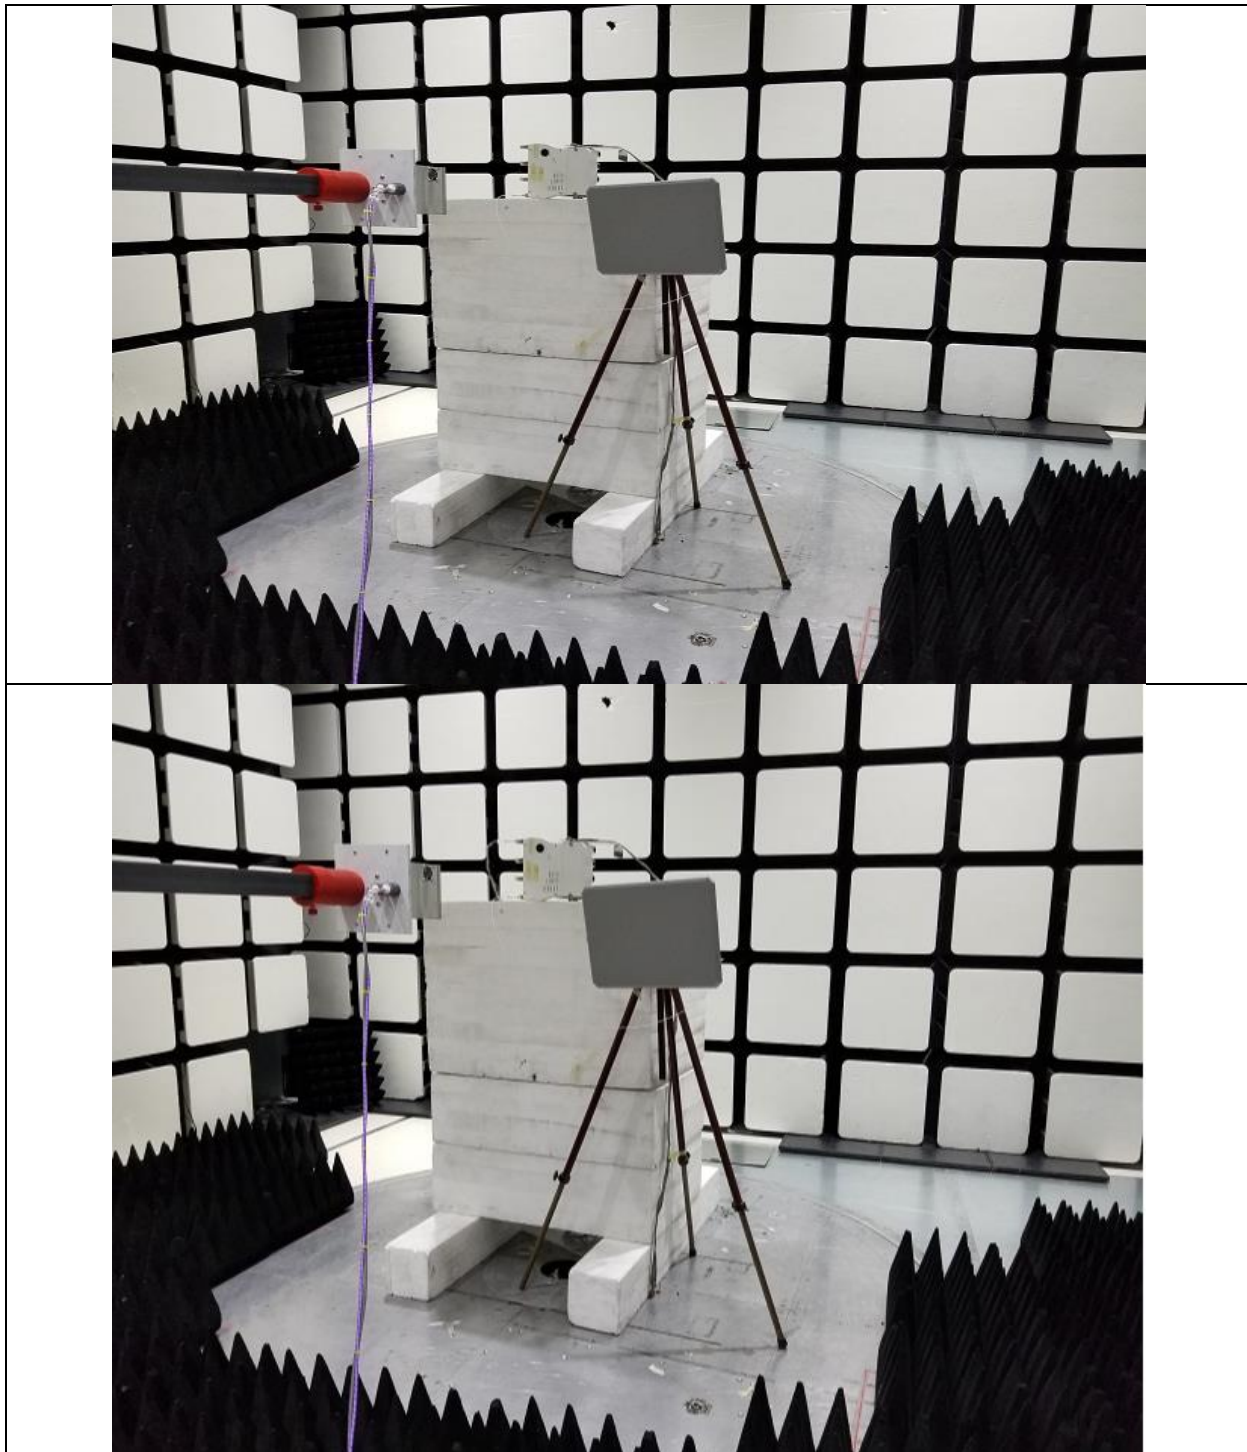

Title: Radiated Spurious Emissions 18GHz-40GHz – Test Setup

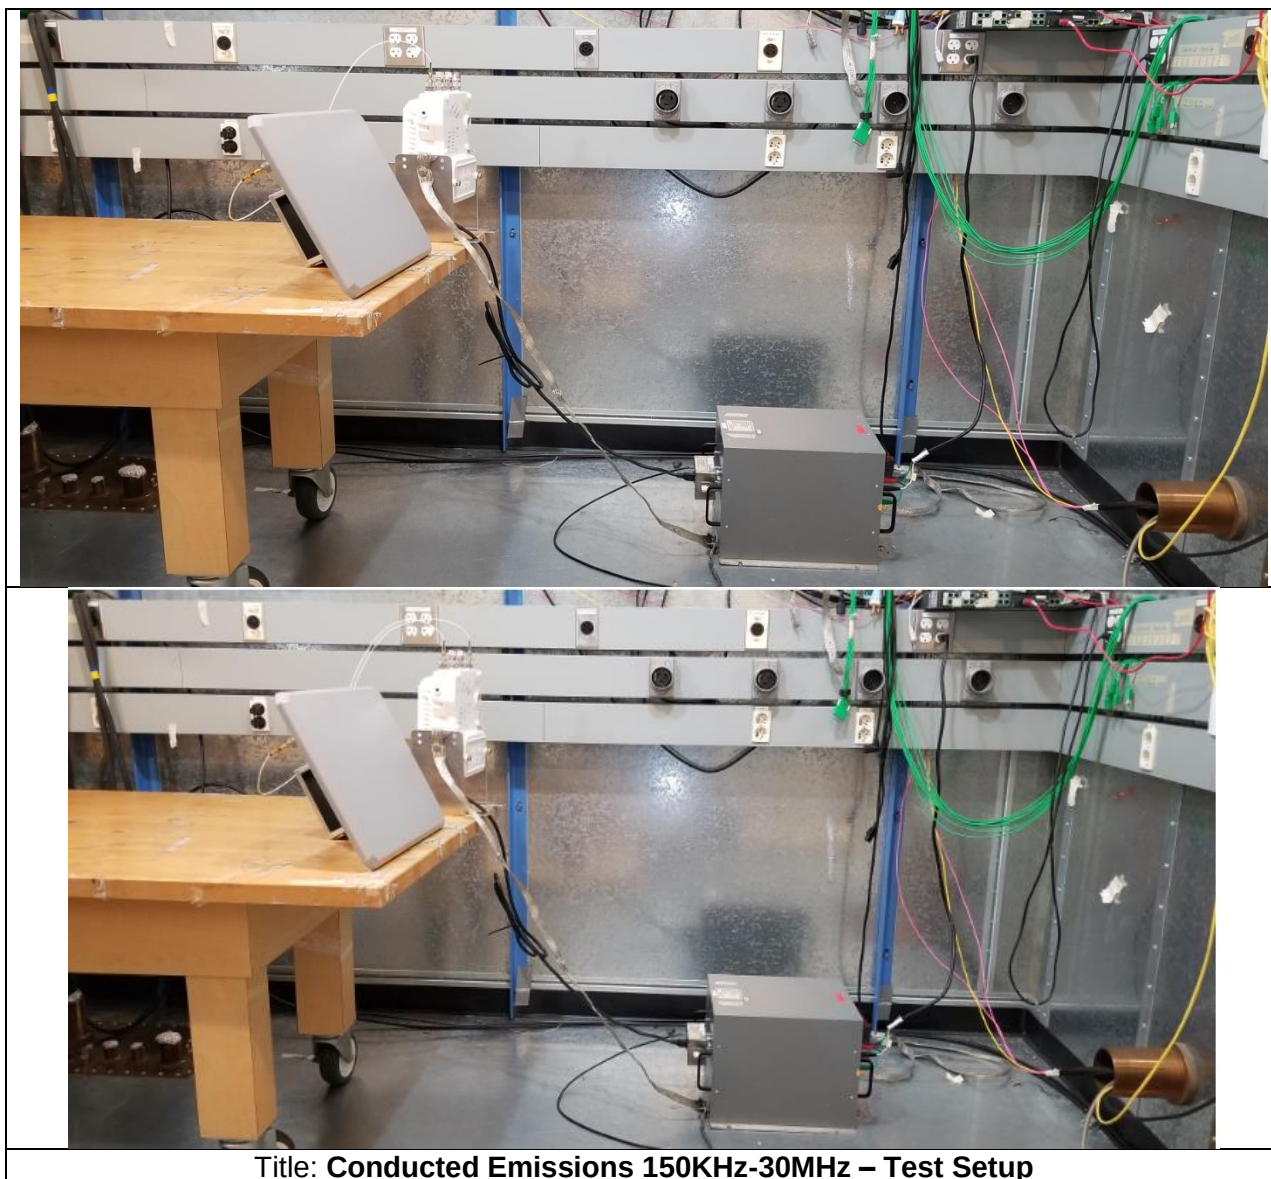

Title: **Conducted Emissions 150KHz-30MHz – Test Setup**

Appendix F: Software Used to Perform Testing

EMIssoftVasona, version 6.024

Appendix G: Test Procedures

Measurements were made in accordance with

- KDB 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # 1445048
FCC 5GHz RSE Test Procedures	EDCS # 1511600

AppendixH: Scope of Accreditation (A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

Appendix I: Test Assessment Plan

Compliance Test Plan (Excel) EDCS# 18357550
Target Power Tables EDCS# 18295686

Appendix J: Worst Case Justification

All 3 orientations (Z, Y, Z) of the EUT were assessed by performing pre-scan.
The Z orientation was determined to be the worst-case orientation.

Worst Case Mode: Worst case mode shall be the mode that produces the highest power level based on conducted power measurement.

Also see Appendix A the test report.

End