


EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz - CDD Mode	Test Voltage	110V/60Hz

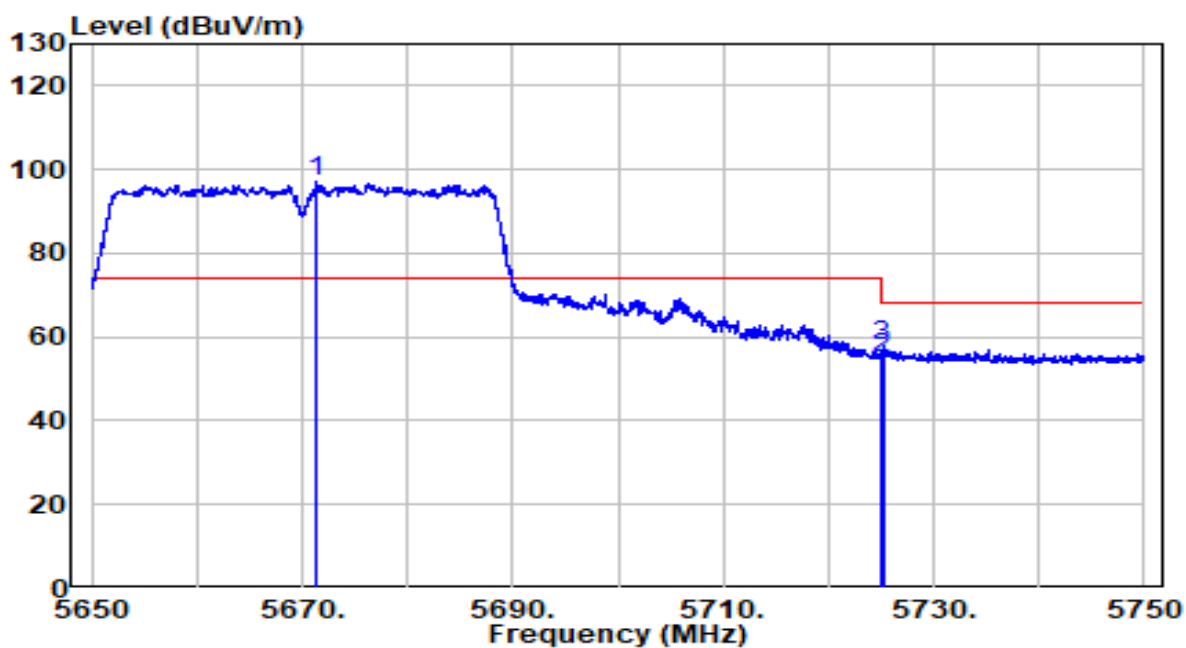


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5671.300	76.49	20.83	97.32	N/A	N/A	Peak
2		5725.000	33.74	21.00	54.74	-13.46	68.20	Peak
3		5725.150	36.77	21.00	57.77	-10.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz - CDD Mode	Test Voltage	110V/60Hz

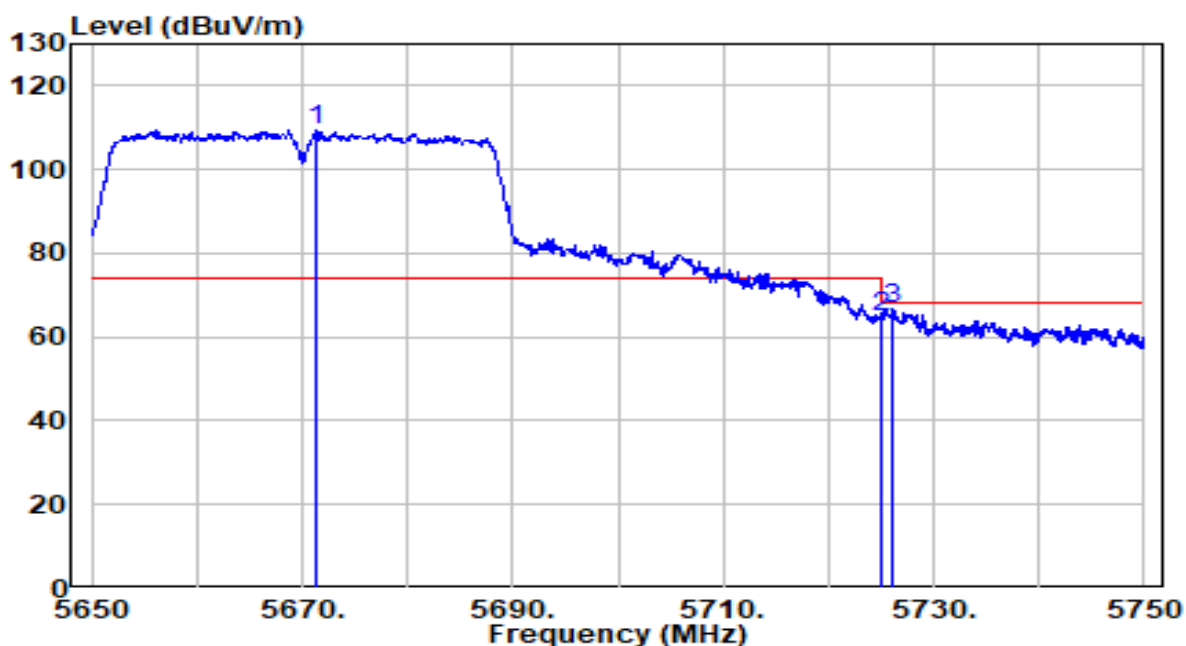


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5671.350	88.64	20.83	109.46	N/A	N/A	Peak
2		5725.000	43.71	21.00	64.71	-3.49	68.20	Peak
3		5726.100	45.81	21.00	66.81	-1.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755MHz - CDD Mode	Test Voltage	110V/60Hz

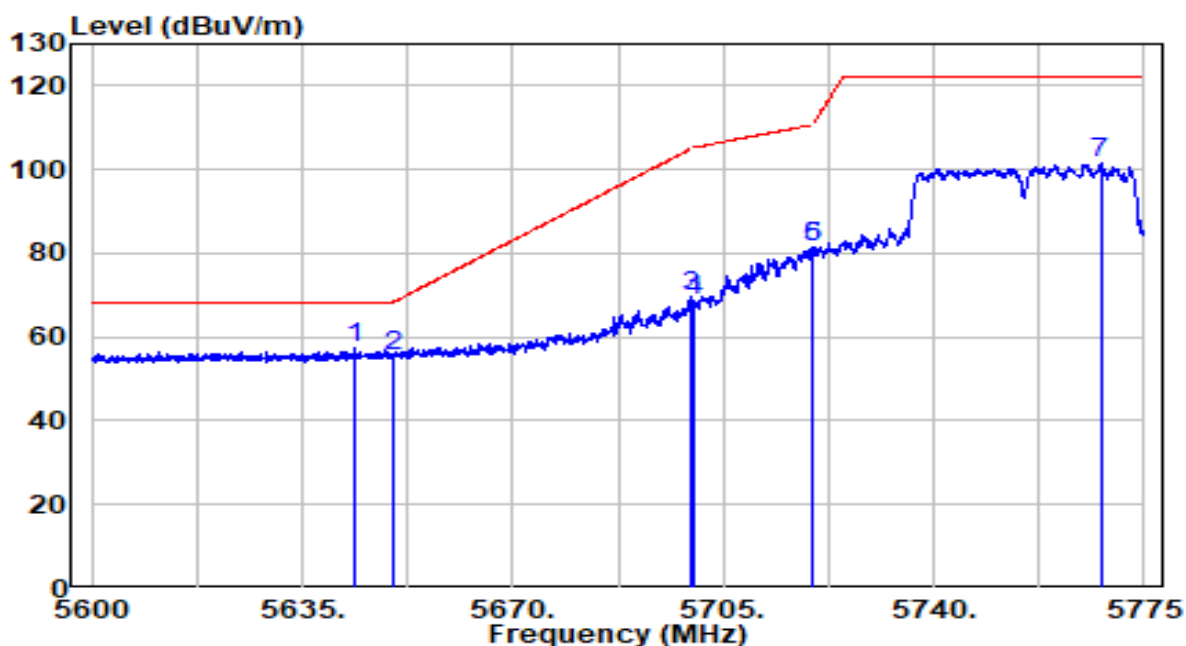


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5643.925	36.43	20.74	57.17	-11.03	68.20	Peak
2		5650.000	34.63	20.76	55.39	-12.81	68.20	Peak
3		5699.750	48.72	20.92	69.64	-35.38	105.02	Peak
4		5700.000	47.98	20.92	68.90	-36.30	105.20	Peak
5		5719.962	60.55	20.98	81.53	-29.26	110.79	Peak
6		5720.000	60.55	20.98	81.53	-29.27	110.80	Peak
7		5767.737	80.20	21.14	101.34	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755MHz - CDD Mode	Test Voltage	110V/60Hz

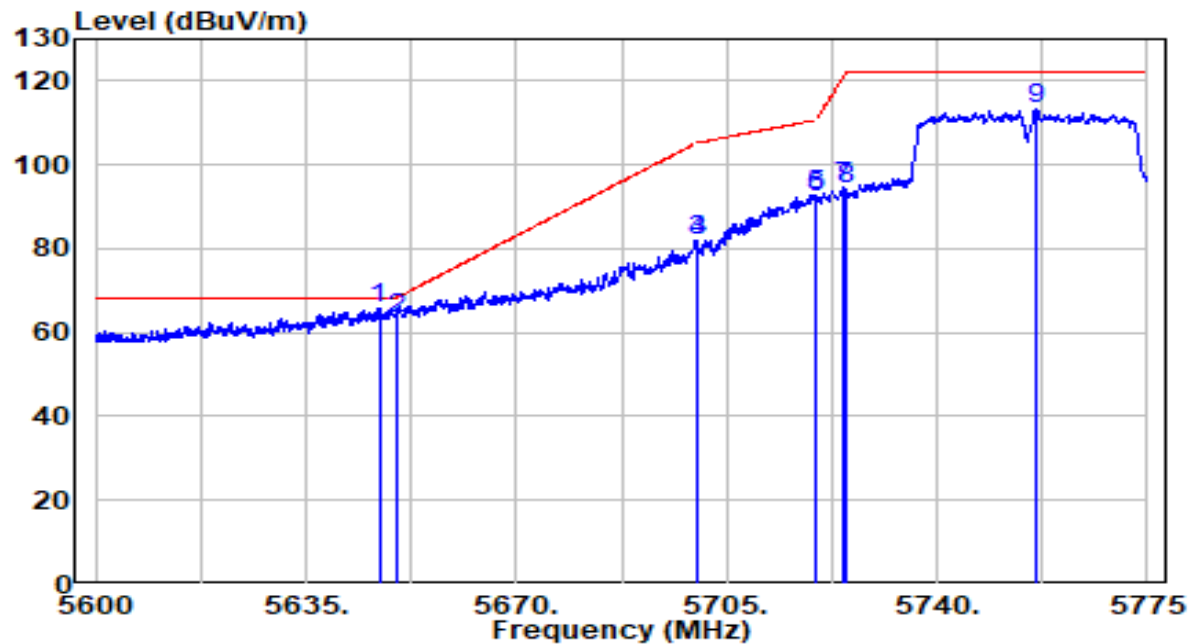


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5647.163	45.07	20.75	65.81	-2.39	68.20	Peak
2		5650.000	42.40	20.76	63.16	-5.04	68.20	Peak
3		5700.000	61.12	20.92	82.04	-23.16	105.20	Peak
4		5700.013	61.12	20.92	82.04	-23.16	105.20	Peak
5		5719.700	71.94	20.98	92.92	-17.79	110.72	Peak
6		5720.000	71.08	20.98	92.06	-18.74	110.80	Peak
7		5724.600	73.88	21.00	94.88	-26.41	121.29	Peak
8		5725.000	73.07	21.00	94.07	-28.13	122.20	Peak
9		5756.362	92.15	21.10	113.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795MHz - CDD Mode	Test Voltage	110V/60Hz

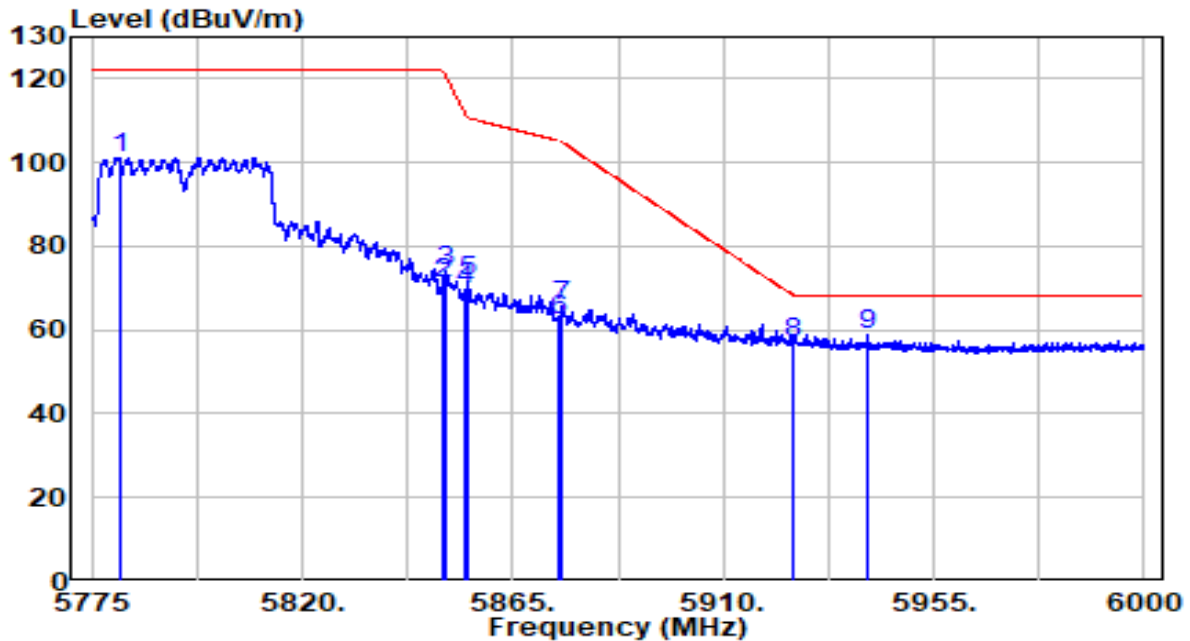


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5780.850	80.06	21.18	101.24	N/A	N/A	Peak
2	5850.000	49.69	21.40	71.09	-51.11	122.20	Peak
3	5850.938	52.52	21.41	73.93	-46.13	120.06	Peak
4	5855.000	48.23	21.42	69.65	-41.15	110.80	Peak
5	5855.550	49.96	21.42	71.39	-39.26	110.65	Peak
6	5875.000	40.71	21.49	62.19	-43.01	105.20	Peak
7	5875.350	44.24	21.49	65.73	-39.21	104.94	Peak
8	5925.000	35.44	21.65	57.09	-11.11	68.20	Peak
9 *	5940.712	37.33	21.70	59.03	-9.17	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795MHz - CDD Mode	Test Voltage	110V/60Hz

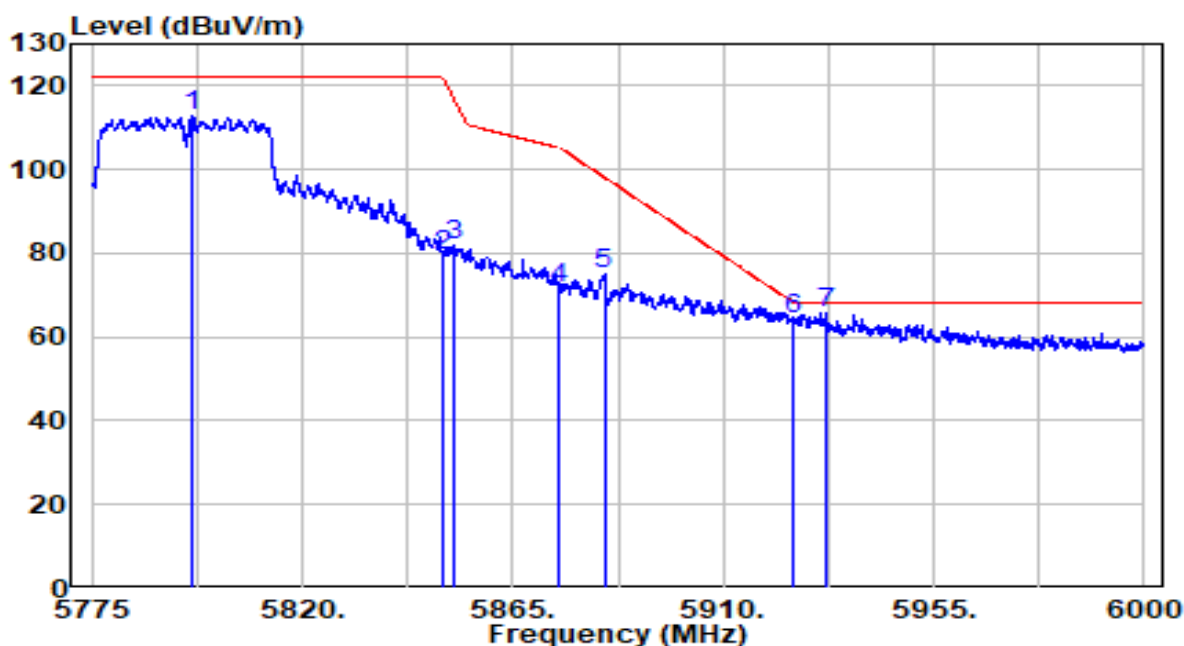


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5796.263	91.82	21.23	113.05	N/A	N/A	Peak
2	5850.000	58.24	21.40	79.64	-42.56	122.20	Peak
3	5852.288	60.27	21.41	81.69	-35.30	116.98	Peak
4	5875.000	50.30	21.49	71.78	-33.42	105.20	Peak
5	5884.575	53.45	21.52	74.96	-23.13	98.09	Peak
6	5925.000	42.77	21.65	64.41	-3.79	68.20	Peak
7	* 5932.050	43.93	21.67	65.60	-2.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

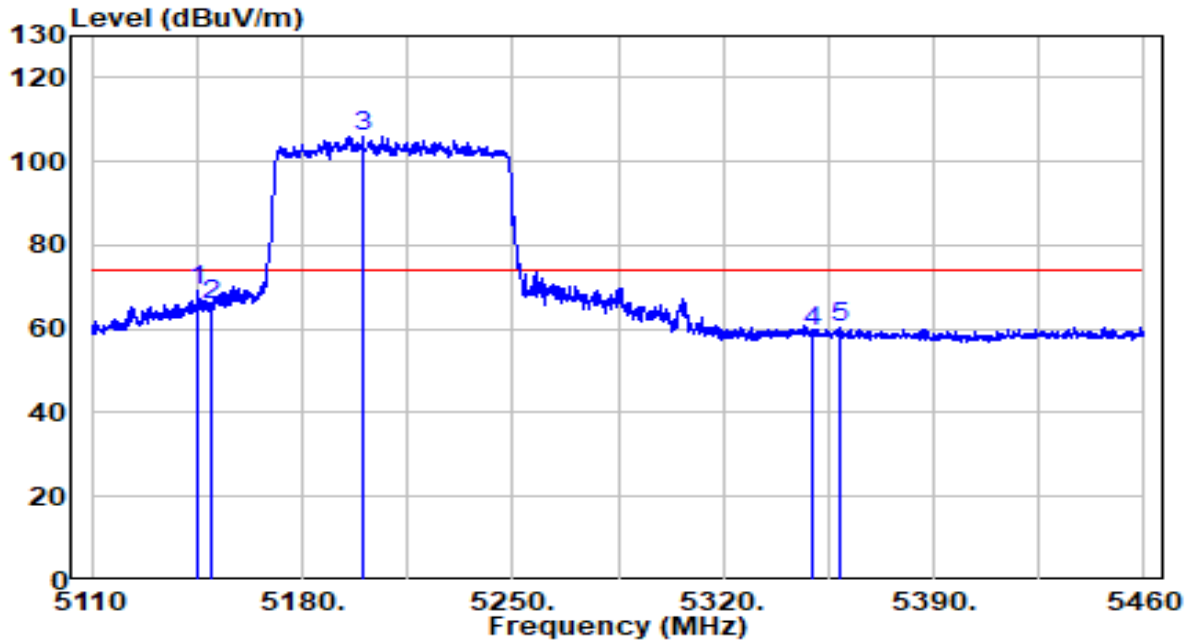


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.350	49.13	19.90	69.03	-4.97	74.00	Peak
2	5150.000	45.79	19.91	65.70	-8.30	74.00	Peak
3	5199.950	86.20	19.96	106.16	N/A	N/A	Peak
4	5350.000	39.36	20.11	59.47	-14.53	74.00	Peak
5	5358.850	40.39	20.12	60.51	-13.49	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

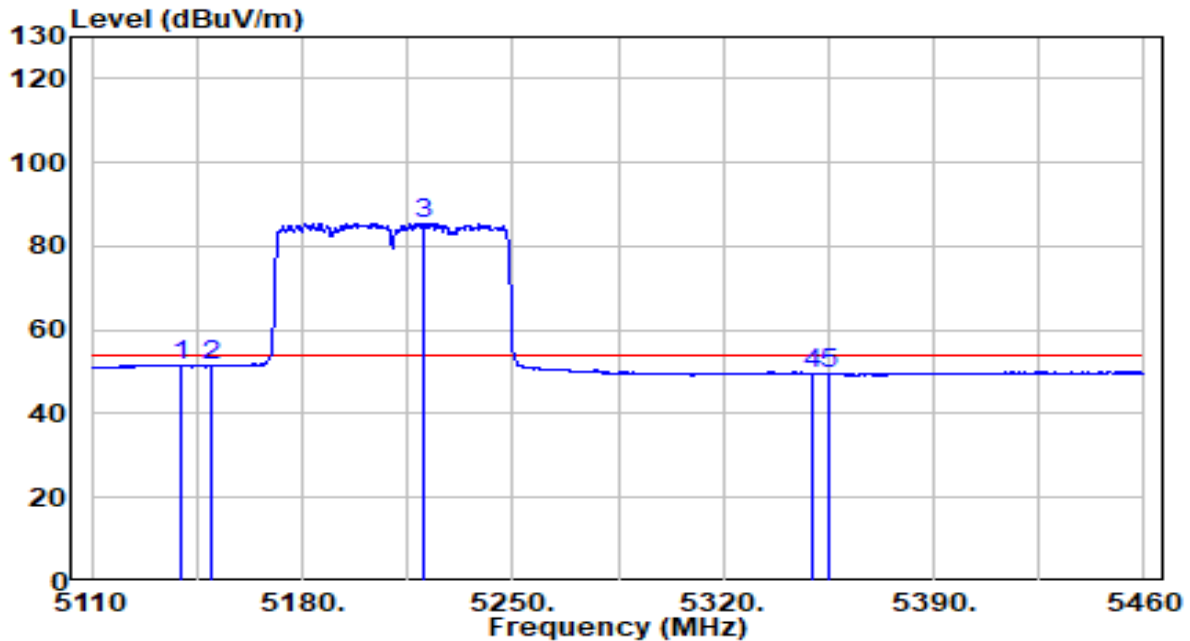


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5139.400	31.84	19.89	51.74	-2.26	54.00	Average
2	5150.000	31.57	19.91	51.47	-2.53	54.00	Average
3	* 5220.775	65.55	19.98	85.53	N/A	N/A	Average
4	5350.000	29.46	20.11	49.58	-4.42	54.00	Average
5	5354.825	29.55	20.12	49.67	-4.33	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

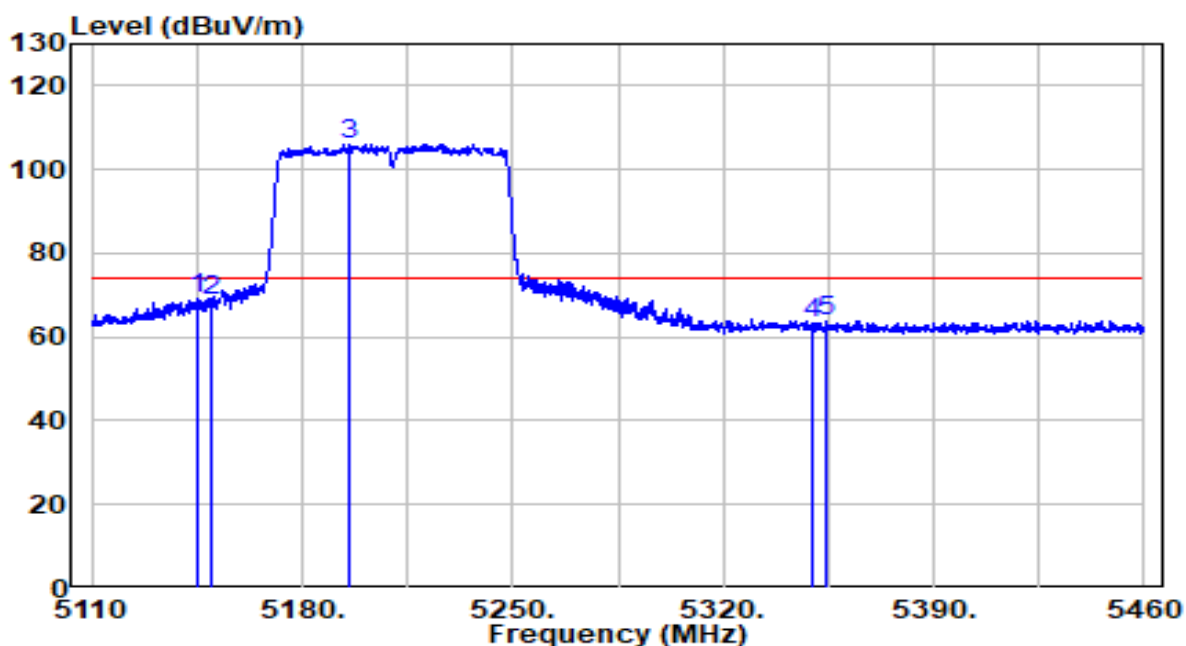


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.525	49.12	19.90	69.02	-4.98	74.00	Peak
2	5150.000	48.62	19.91	68.52	-5.48	74.00	Peak
3	* 5195.575	86.15	19.95	106.11	N/A	N/A	Peak
4	5350.000	43.17	20.11	63.29	-10.71	74.00	Peak
5	5354.475	43.88	20.12	64.00	-10.00	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

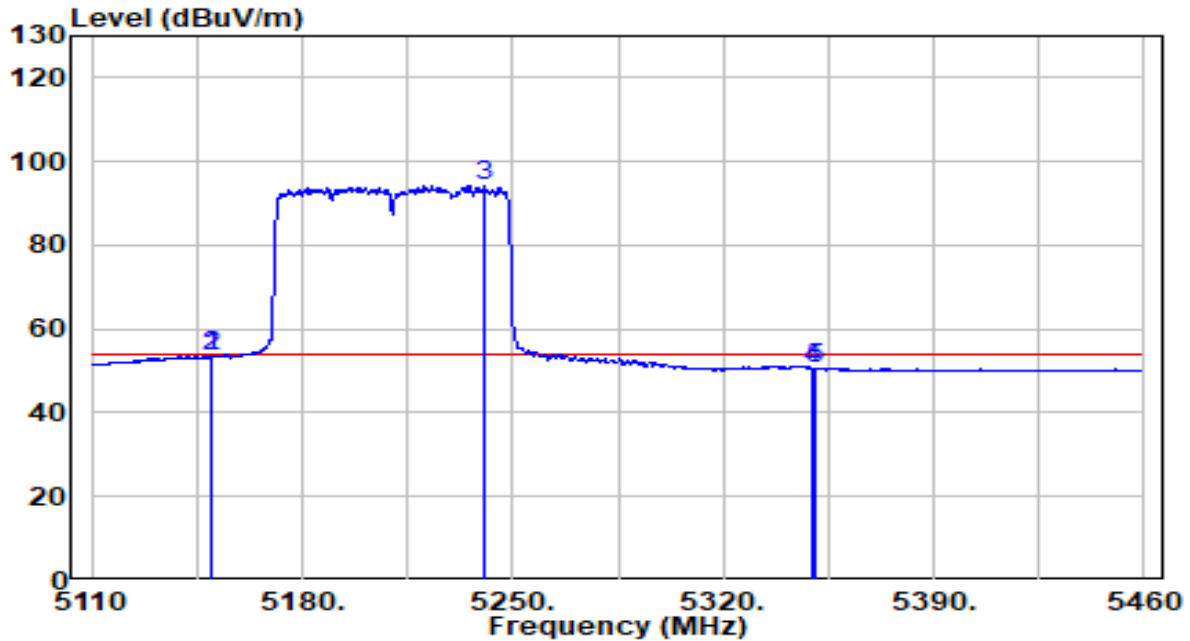


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.900	33.58	19.91	53.48	-0.52	54.00	Average
2	5150.000	33.50	19.91	53.41	-0.59	54.00	Average
3	* 5240.725	74.20	20.00	94.20	N/A	N/A	Average
4	5350.000	30.34	20.11	50.45	-3.55	54.00	Average
5	5350.275	30.60	20.11	50.71	-3.29	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

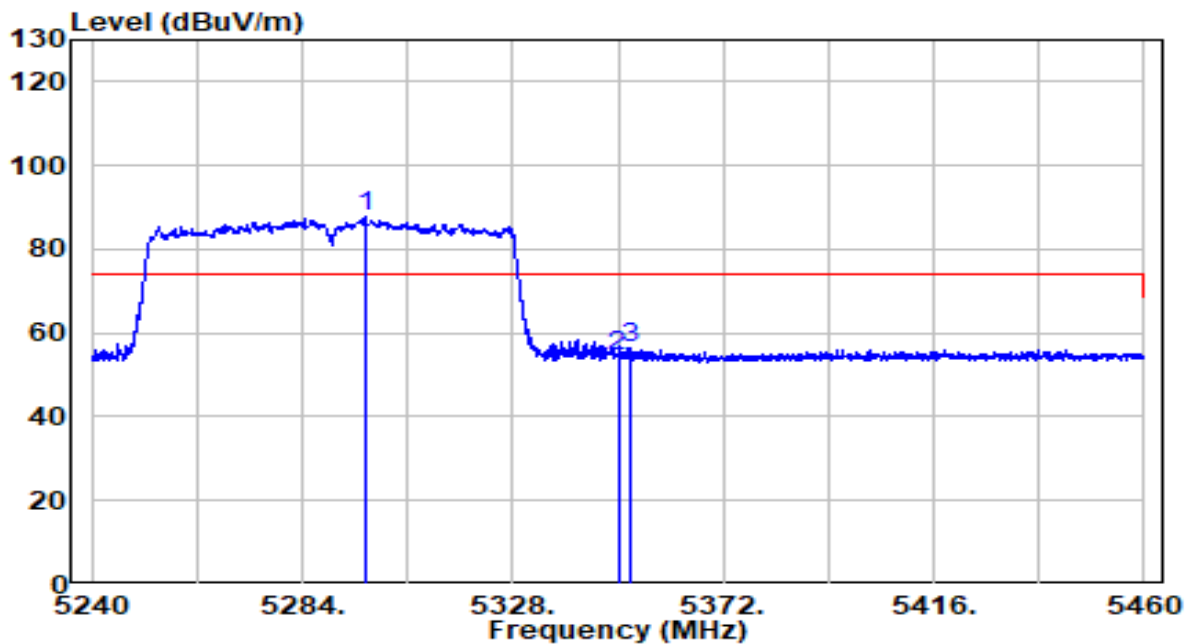


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5297.090	67.61	20.06	87.67	N/A	N/A	Peak
2		5350.000	34.42	20.11	54.53	-19.47	74.00	Peak
3		5352.750	36.18	20.12	56.30	-17.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

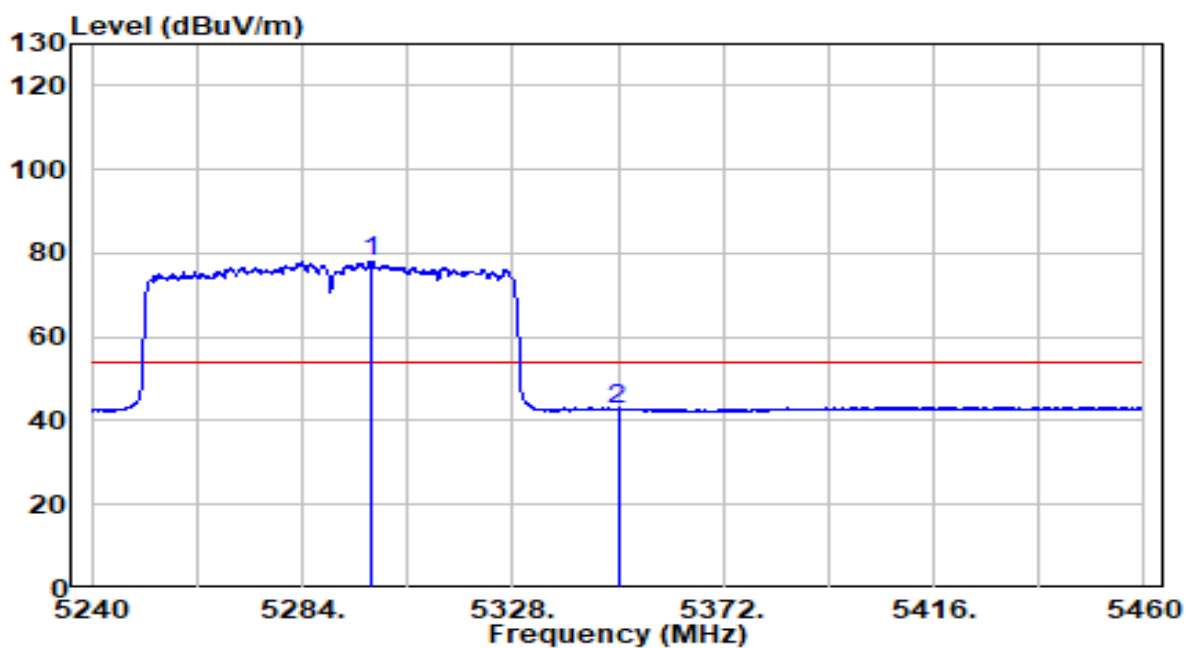


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5298.410	58.03	20.06	78.09	N/A	N/A	Average
2		5350.000	22.43	20.11	42.54	-11.46	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

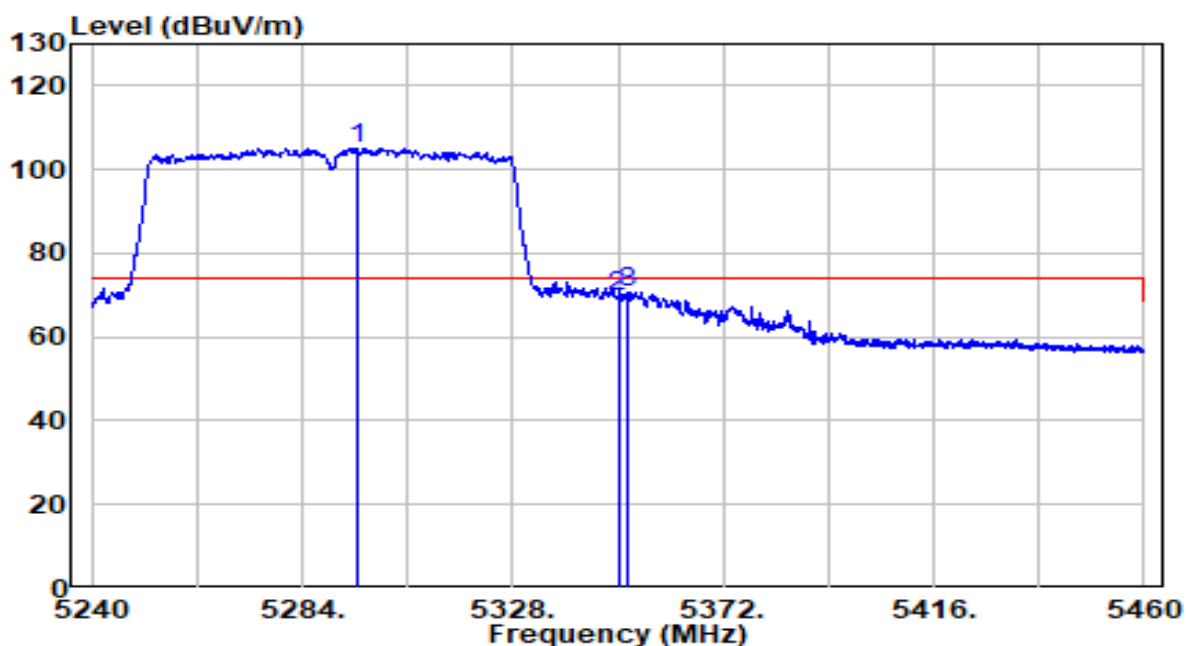


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5295.550	85.05	20.06	105.11	N/A	N/A	Peak
2		5350.000	49.42	20.11	69.54	-4.46	74.00	Peak
3		5352.200	50.58	20.12	70.70	-3.30	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

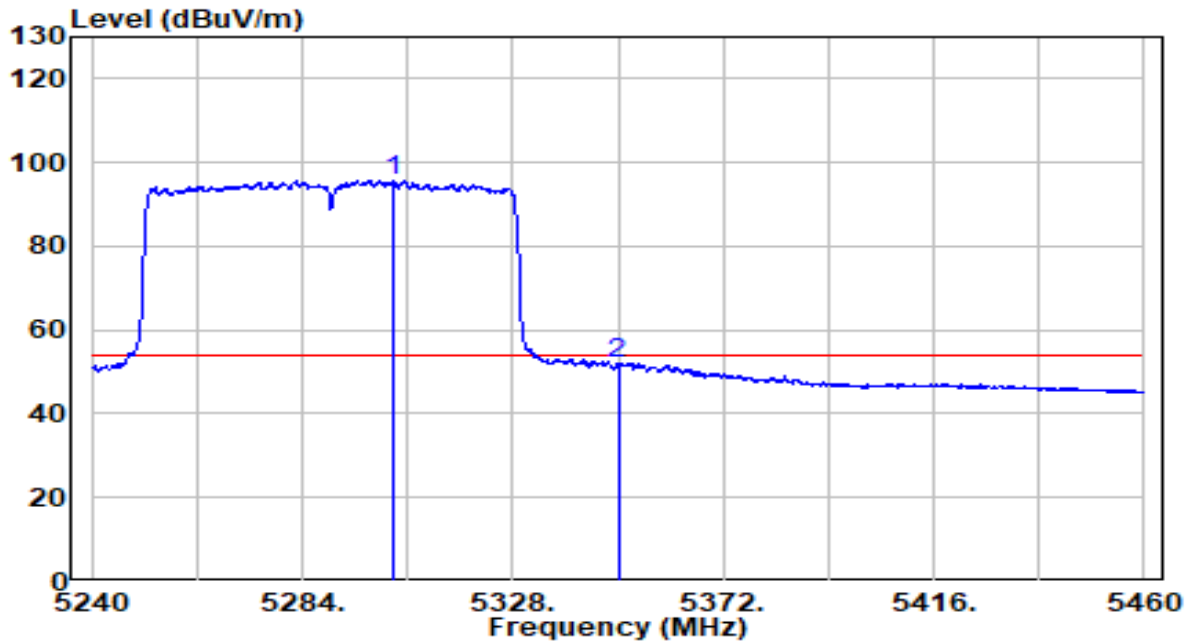


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5302.920	75.81	20.07	95.87	N/A	N/A	Average
2		5350.000	32.11	20.11	52.22	-1.78	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

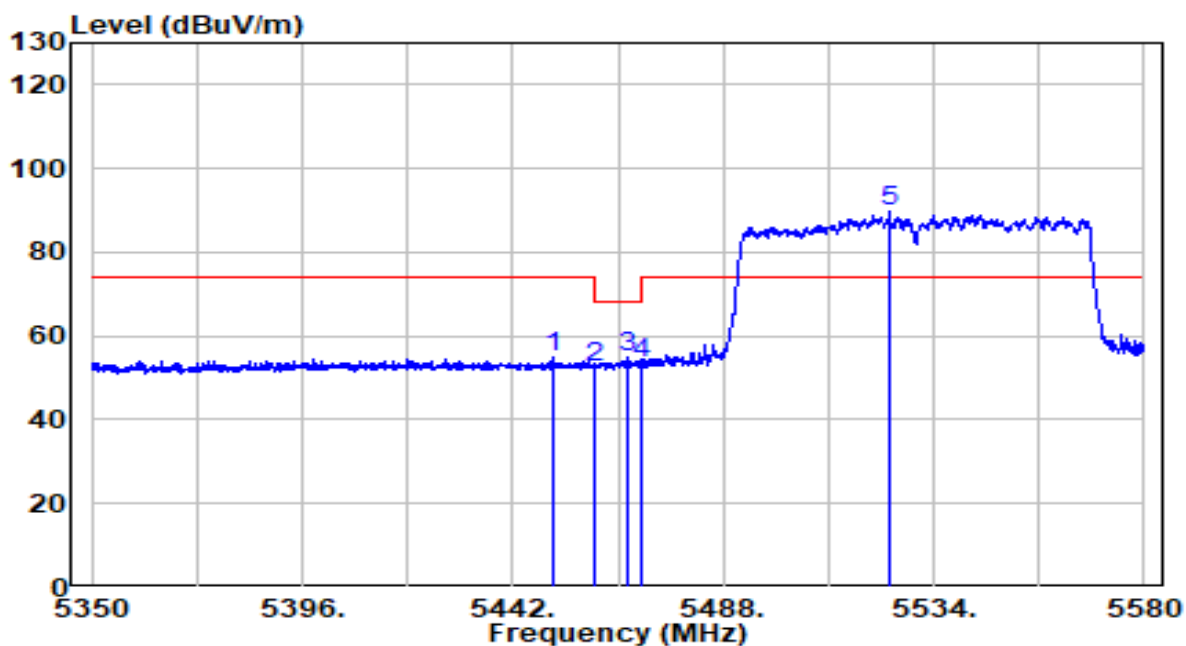


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5450.625	34.66	20.22	54.87	-19.13	74.00	Peak
2	5460.000	32.43	20.23	52.66	-15.54	68.20	Peak
3	5467.070	34.65	20.24	54.89	-13.31	68.20	Peak
4	5470.000	33.00	20.24	53.24	-14.96	68.20	Peak
5	* 5524.340	69.20	20.35	89.55	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

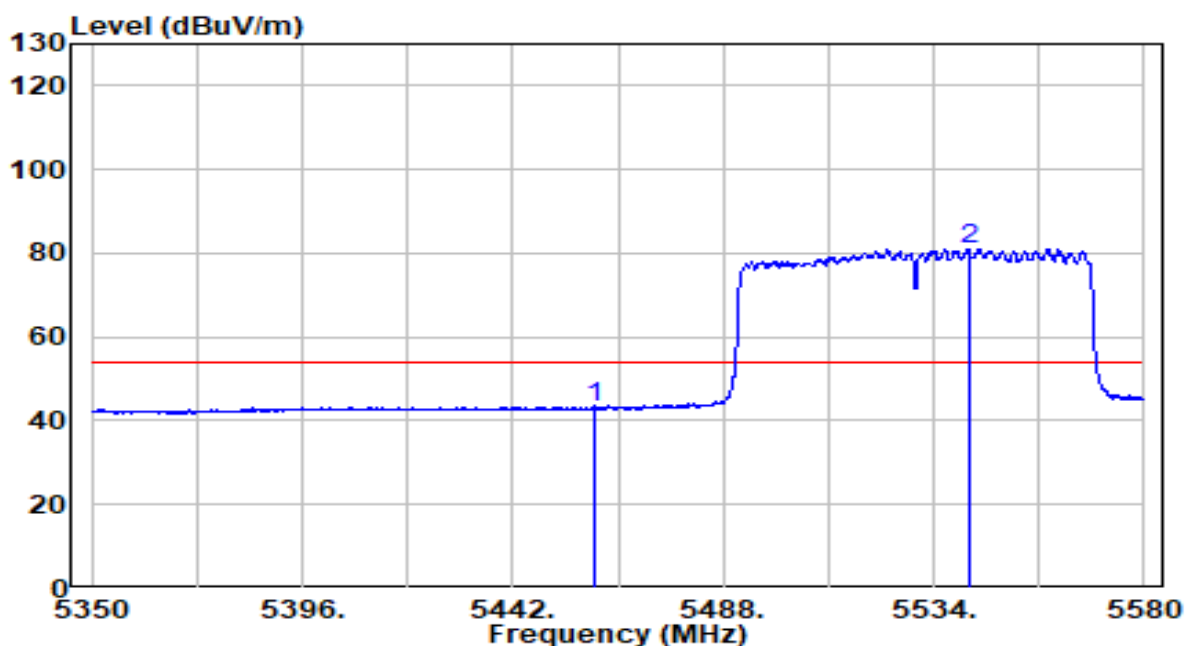


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5460.000	22.89	20.23	43.12	-10.88	54.00	Average
2	* 5541.590	60.75	20.40	81.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

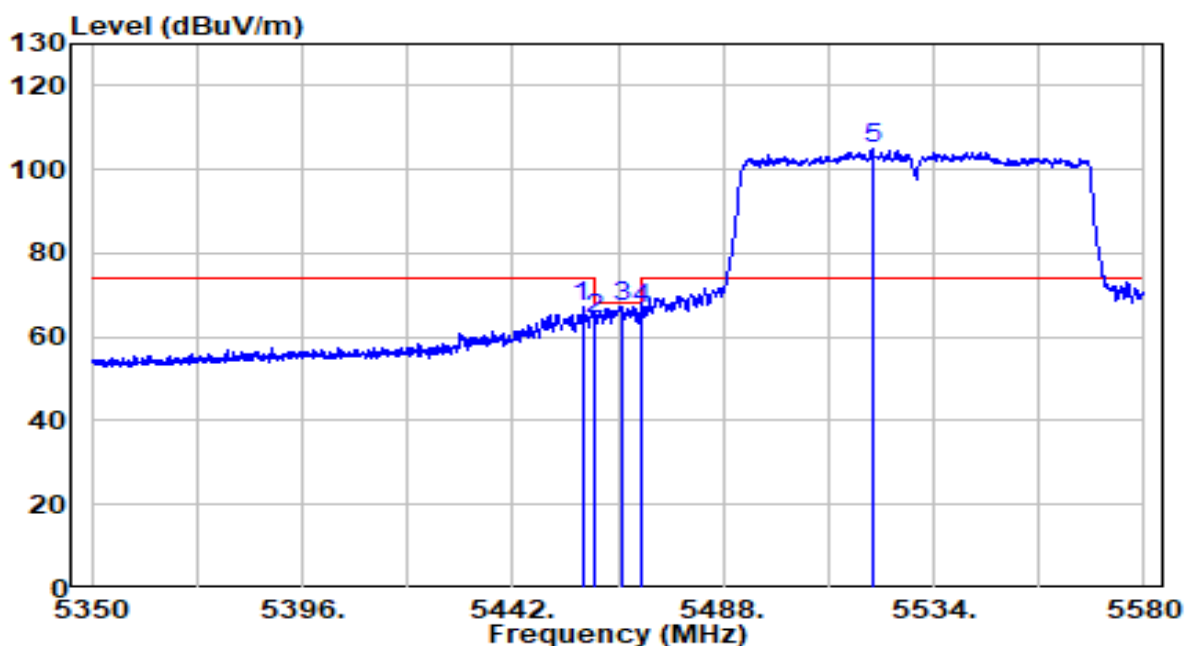


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.180	47.17	20.23	67.40	-6.60	74.00	Peak
2	5460.000	43.99	20.23	64.22	-3.98	68.20	Peak
3	5465.805	47.09	20.23	67.32	-0.88	68.20	Peak
4	5470.000	46.33	20.24	66.56	-1.64	68.20	Peak
5	* 5520.660	84.80	20.34	105.14	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

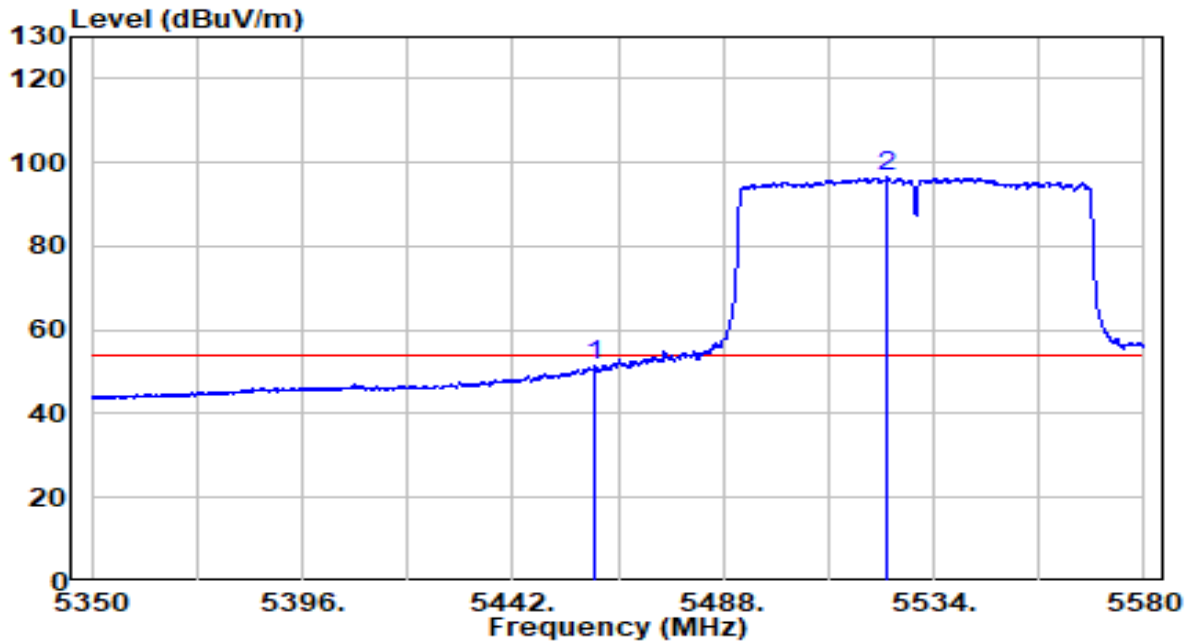


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	31.31	20.23	51.53	-2.47	54.00	Average
2	* 5523.995	76.08	20.35	96.43	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at channel 5775MHz - CDD Mode	Test Voltage	110V/60Hz

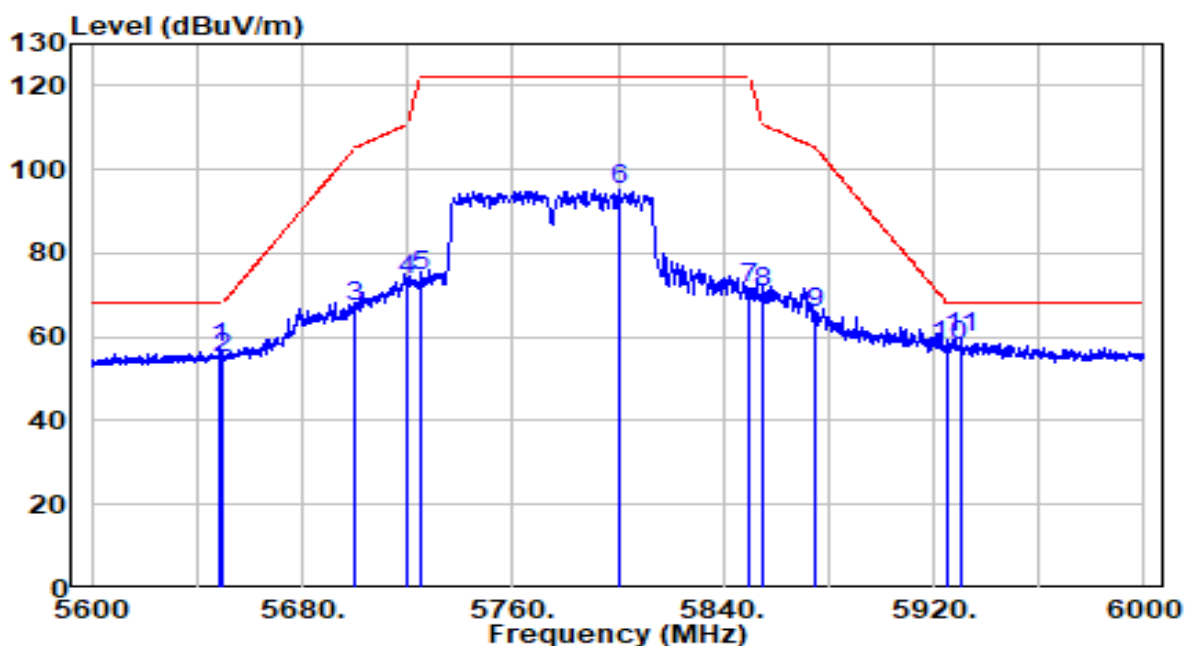


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5648.400	36.82	20.75	57.57	-10.63	68.20	Peak
2	5650.000	34.19	20.76	54.95	-13.25	68.20	Peak
3	5700.000	46.07	20.92	66.99	-38.21	105.20	Peak
4	5720.000	52.39	20.98	73.37	-37.43	110.80	Peak
5	5725.000	53.79	21.00	74.79	-47.41	122.20	Peak
6	5800.600	73.70	21.24	94.94	N/A	N/A	Peak
7	5850.000	50.04	21.40	71.45	-50.75	122.20	Peak
8	5855.000	49.42	21.42	70.84	-39.96	110.80	Peak
9	5875.000	44.38	21.49	65.86	-39.34	105.20	Peak
10	5925.000	36.12	21.65	57.76	-10.44	68.20	Peak
11	* 5930.200	38.02	21.66	59.68	-8.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at channel 5775MHz - CDD Mode	Test Voltage	110V/60Hz

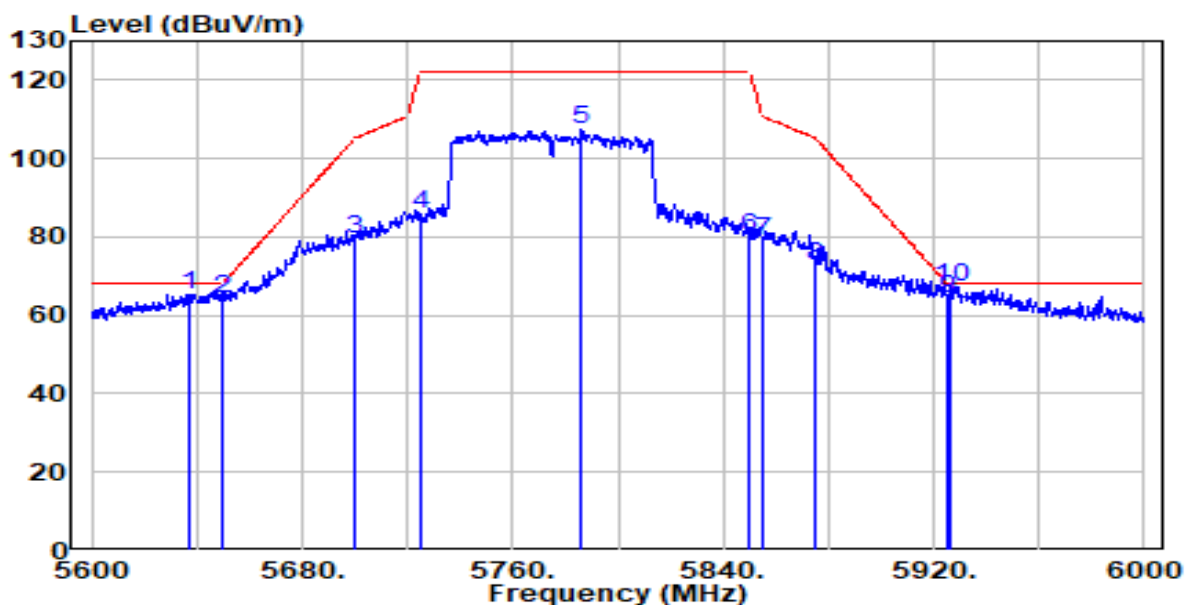


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5637.200	44.75	20.71	65.46	-2.74	68.20	Peak
2	5650.000	43.34	20.76	64.10	-4.10	68.20	Peak
3	5700.000	58.60	20.92	79.51	-25.69	105.20	Peak
4	5725.000	64.63	21.00	85.63	-36.57	122.20	Peak
5	5786.200	86.08	21.20	107.28	N/A	N/A	Peak
6	5850.000	58.72	21.40	80.12	-42.08	122.20	Peak
7	5855.000	57.60	21.42	79.02	-31.78	110.80	Peak
8	5875.000	51.24	21.49	72.72	-32.48	105.20	Peak
9	5925.000	42.82	21.65	64.47	-3.73	68.20	Peak
10	* 5926.600	45.77	21.65	67.42	-0.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

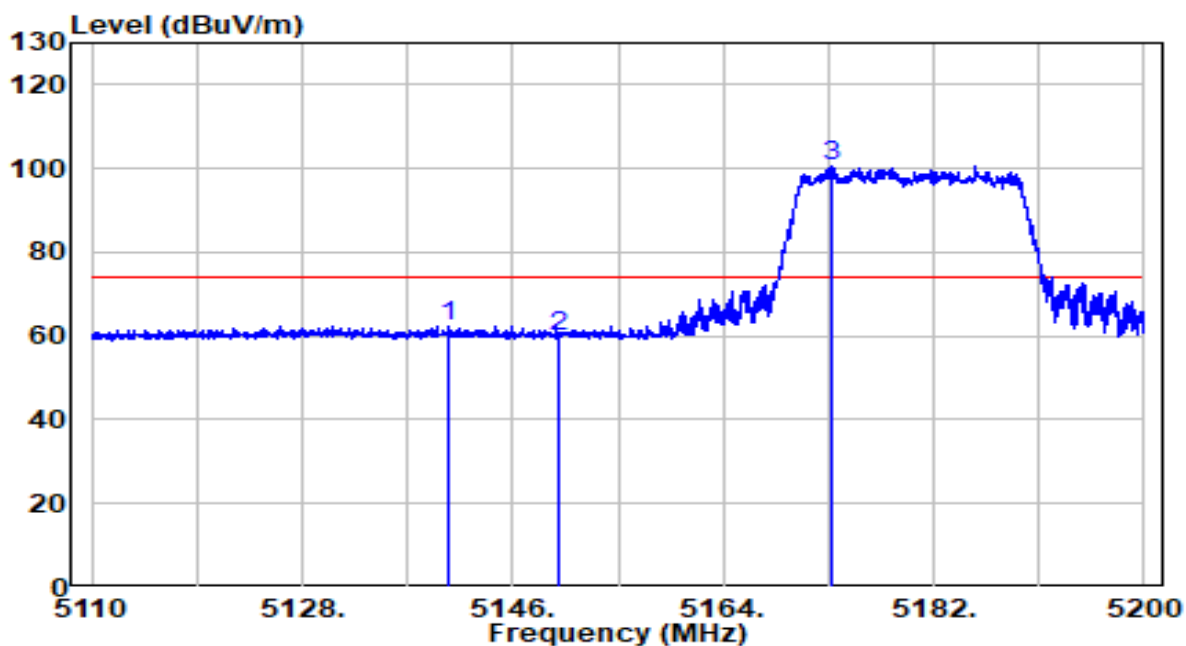


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5140.510	42.53	19.90	62.42	-11.58	74.00	Peak
2	5150.000	40.04	19.91	59.94	-14.06	74.00	Peak
3	* 5173.360	80.76	19.93	100.69	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

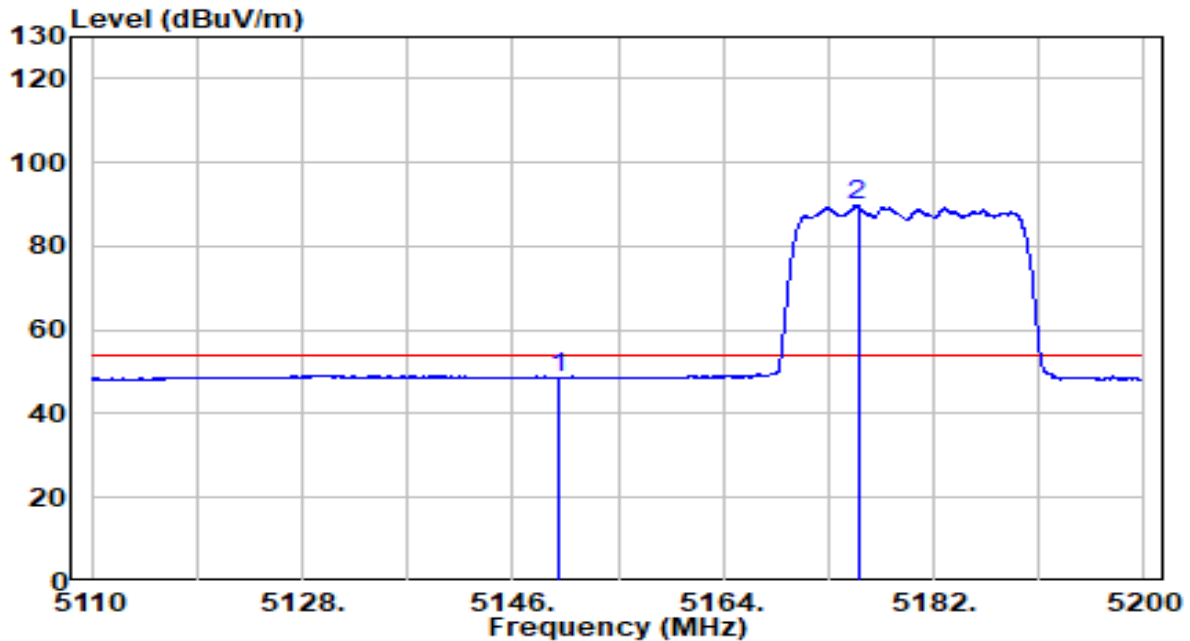


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.73	19.91	48.64	-5.36	54.00	Average
2	* 5175.520	69.68	19.93	89.61	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

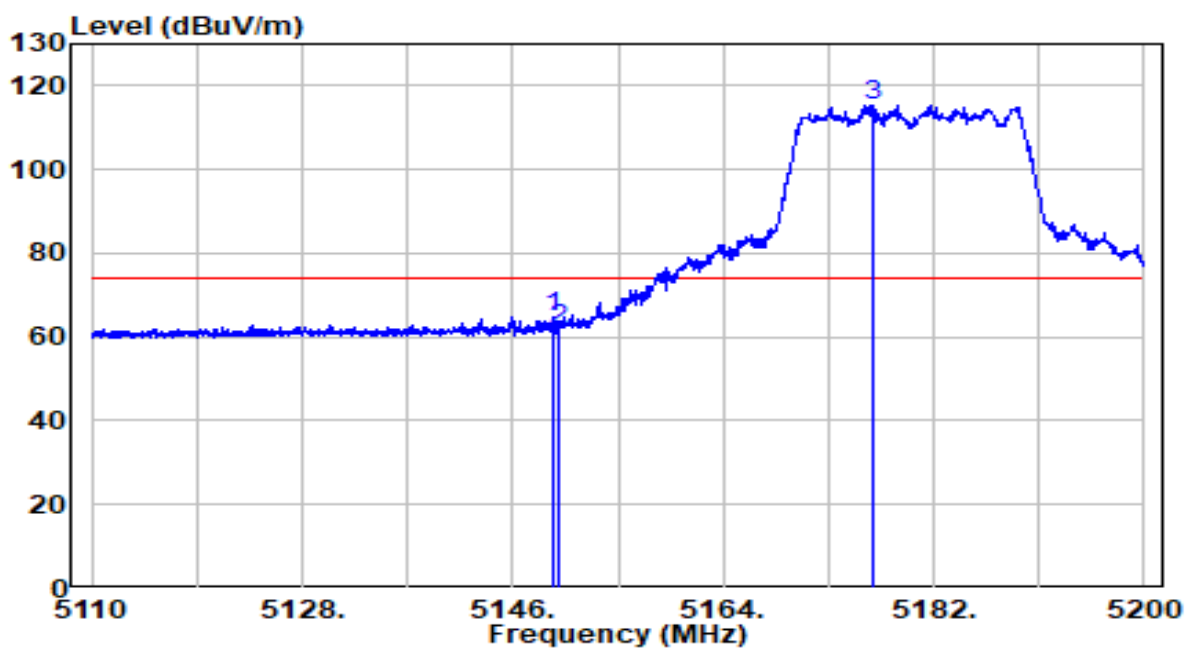


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.420	44.75	19.91	64.65	-9.35	74.00	Peak
2	5150.000	41.87	19.91	61.77	-12.23	74.00	Peak
3	* 5176.825	95.56	19.93	115.49	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

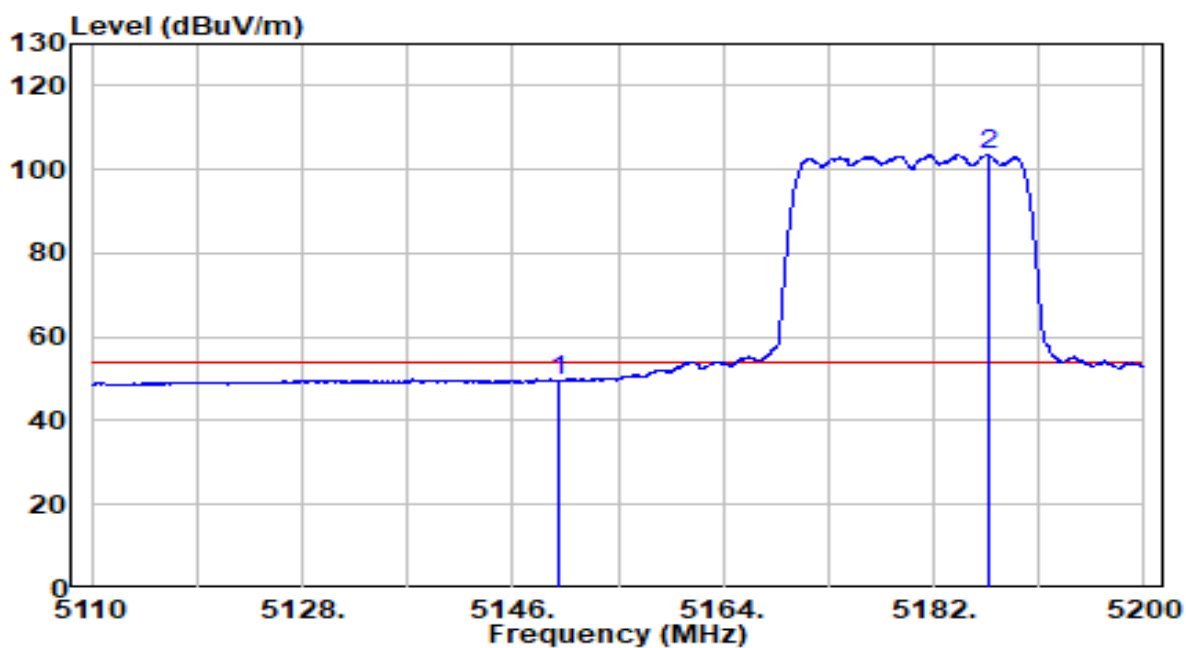


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.67	19.91	49.57	-4.43	54.00	Average
2	* 5186.635	83.68	19.94	103.63	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

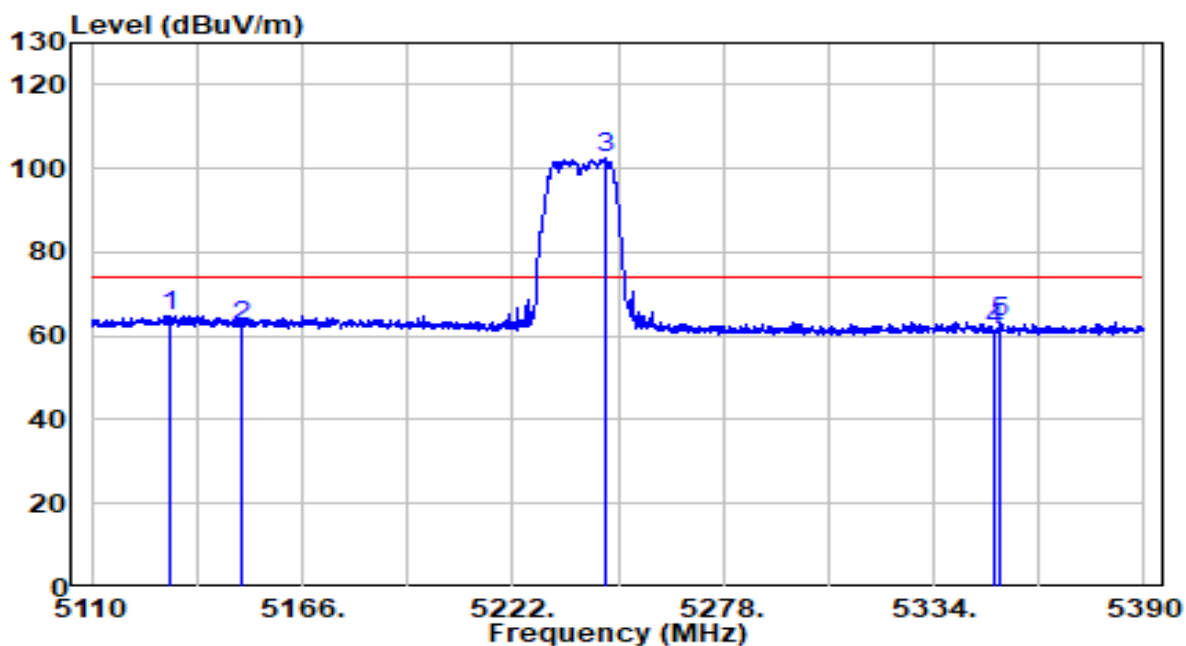


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5130.580	45.08	19.89	64.96	-9.04	74.00	Peak
2	5150.000	42.46	19.91	62.37	-11.63	74.00	Peak
3	* 5246.640	82.66	20.01	102.66	N/A	N/A	Peak
4	5350.000	41.18	20.11	61.30	-12.70	74.00	Peak
5	5351.780	43.03	20.12	63.14	-10.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

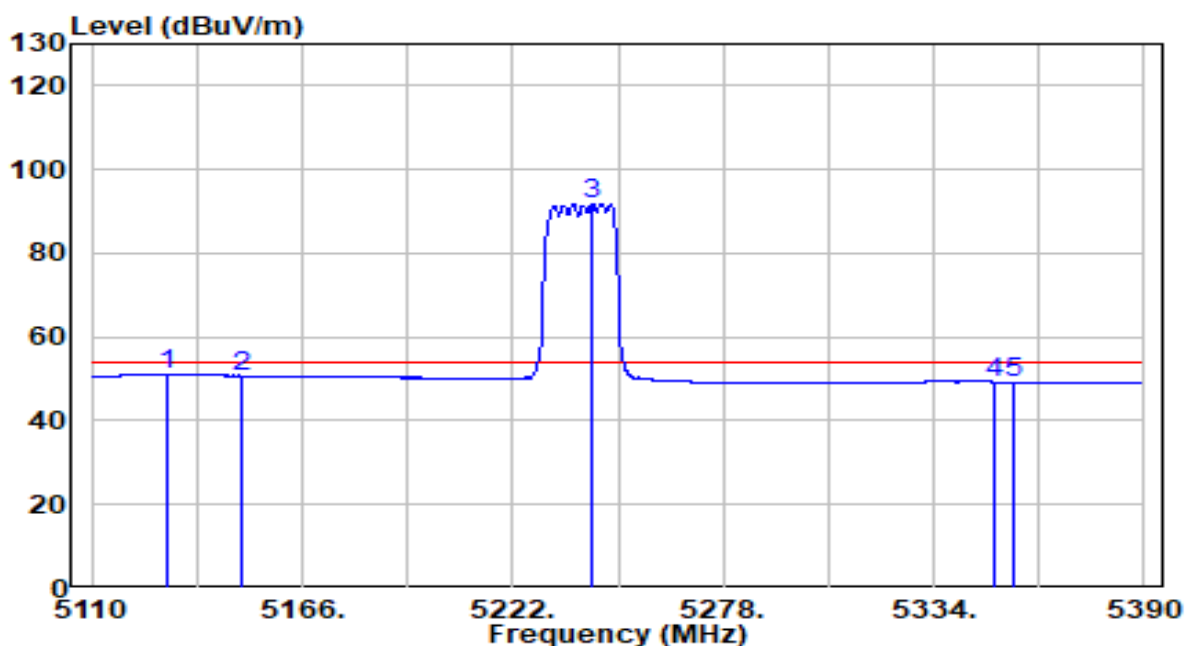


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5129.740	31.29	19.88	51.17	-2.83	54.00	Average
2	5150.000	30.85	19.91	50.75	-3.25	54.00	Average
3	* 5243.140	71.89	20.00	91.90	N/A	N/A	Average
4	5350.000	29.11	20.11	49.23	-4.77	54.00	Average
5	5355.000	29.11	20.12	49.23	-4.77	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

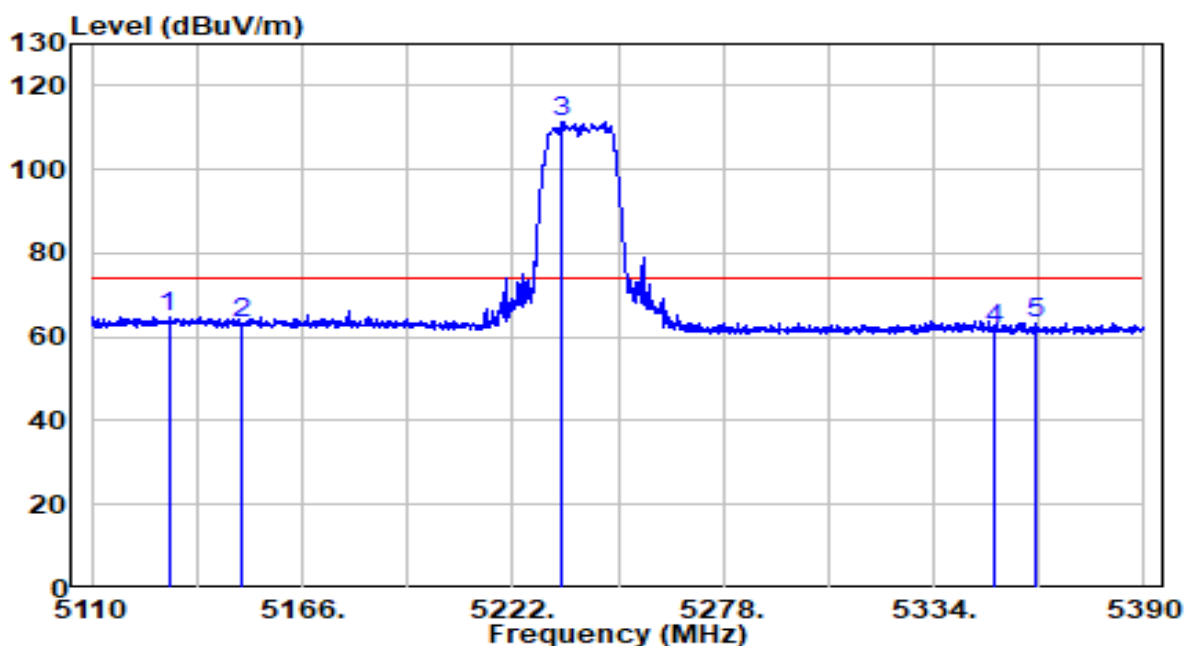


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5130.440	44.73	19.89	64.61	-9.39	74.00	Peak
2	5150.000	43.52	19.91	63.43	-10.57	74.00	Peak
3	* 5235.300	91.56	19.99	111.56	N/A	N/A	Peak
4	5350.000	41.88	20.11	61.99	-12.01	74.00	Peak
5	5361.440	43.27	20.13	63.40	-10.60	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

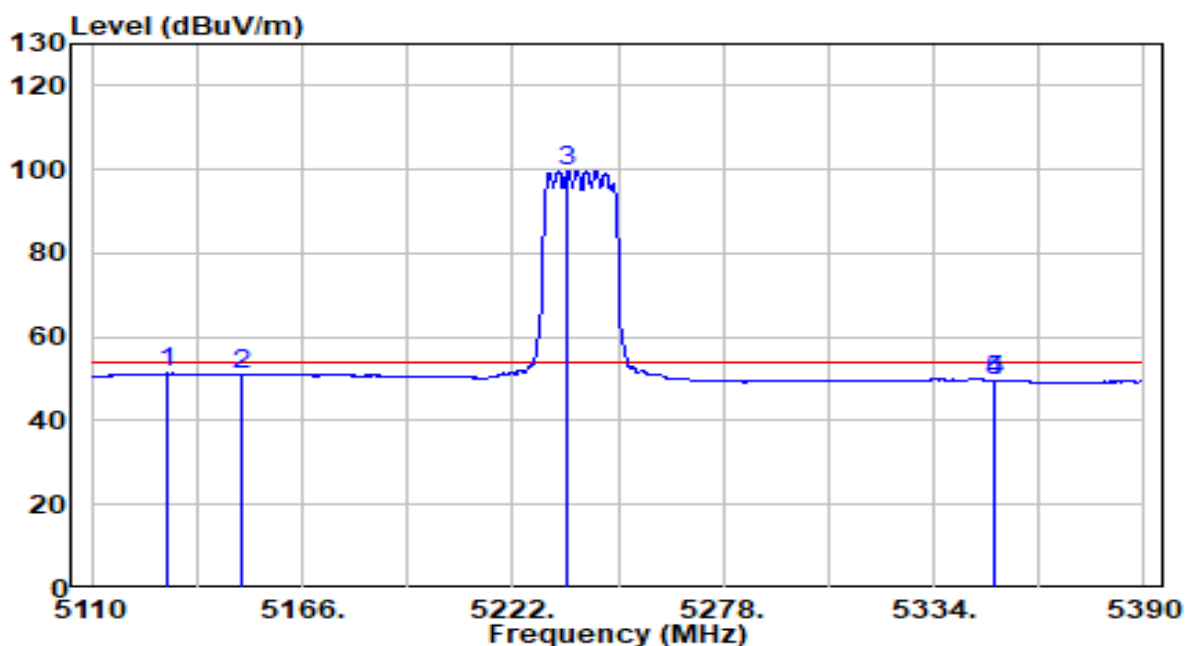


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5129.740	31.40	19.88	51.29	-2.71	54.00	Average
2	5150.000	31.00	19.91	50.91	-3.09	54.00	Average
3	* 5236.700	79.66	20.00	99.66	N/A	N/A	Average
4	5350.000	29.42	20.11	49.54	-4.46	54.00	Average
5	5350.100	29.39	20.11	49.50	-4.50	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

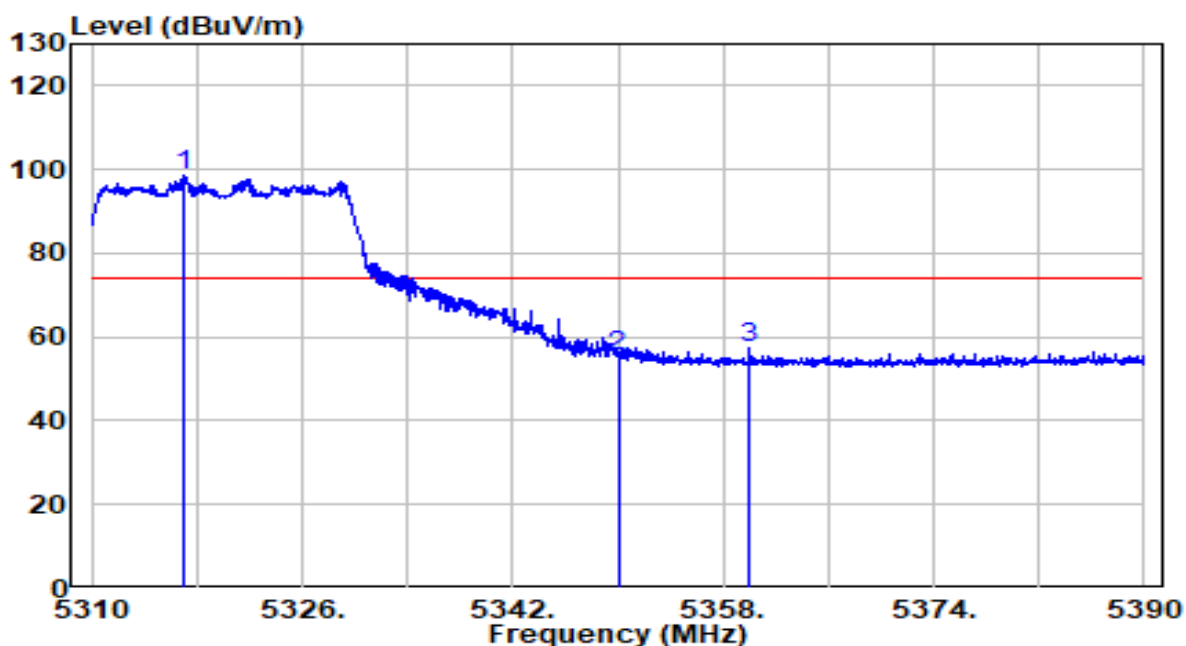


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5316.960	78.32	20.08	98.40	N/A	N/A	Peak
2		5350.000	35.54	20.11	55.65	-18.35	74.00	Peak
3		5359.960	37.15	20.12	57.28	-16.72	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

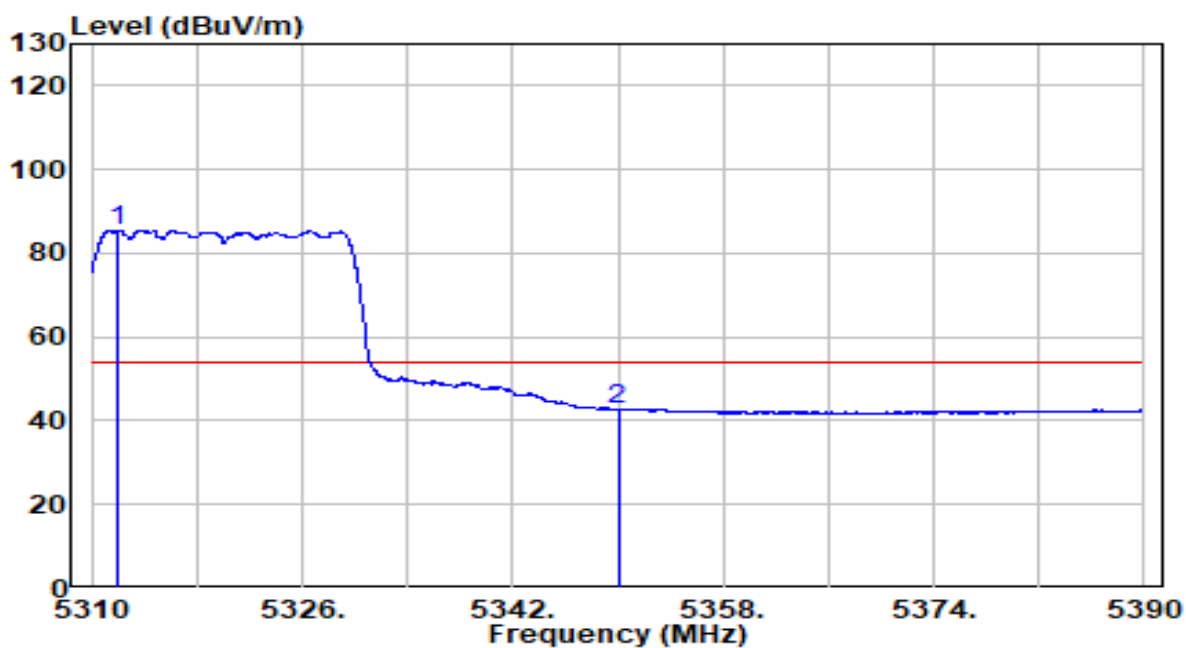


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5311.960	65.44	20.07	85.51	N/A	N/A	Average
2	5350.000	22.52	20.11	42.63	-11.37	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

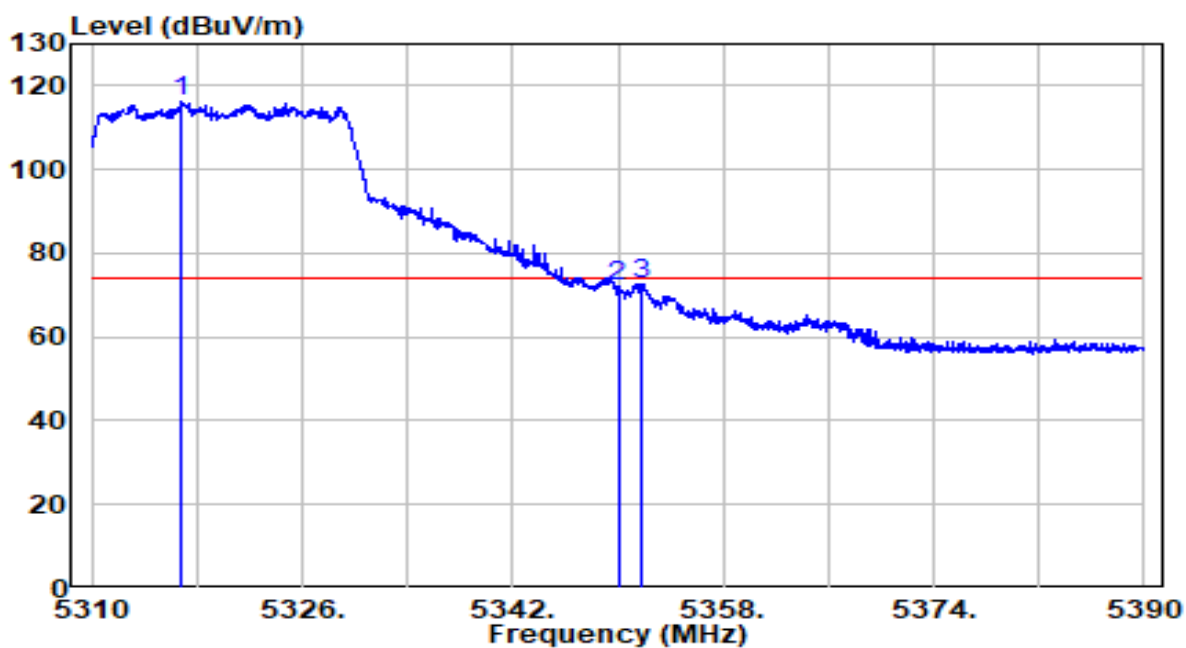


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5316.880	96.07	20.08	116.15	N/A	N/A	Peak
2		5350.000	52.09	20.11	72.21	-1.79	74.00	Peak
3		5351.760	52.53	20.12	72.64	-1.36	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

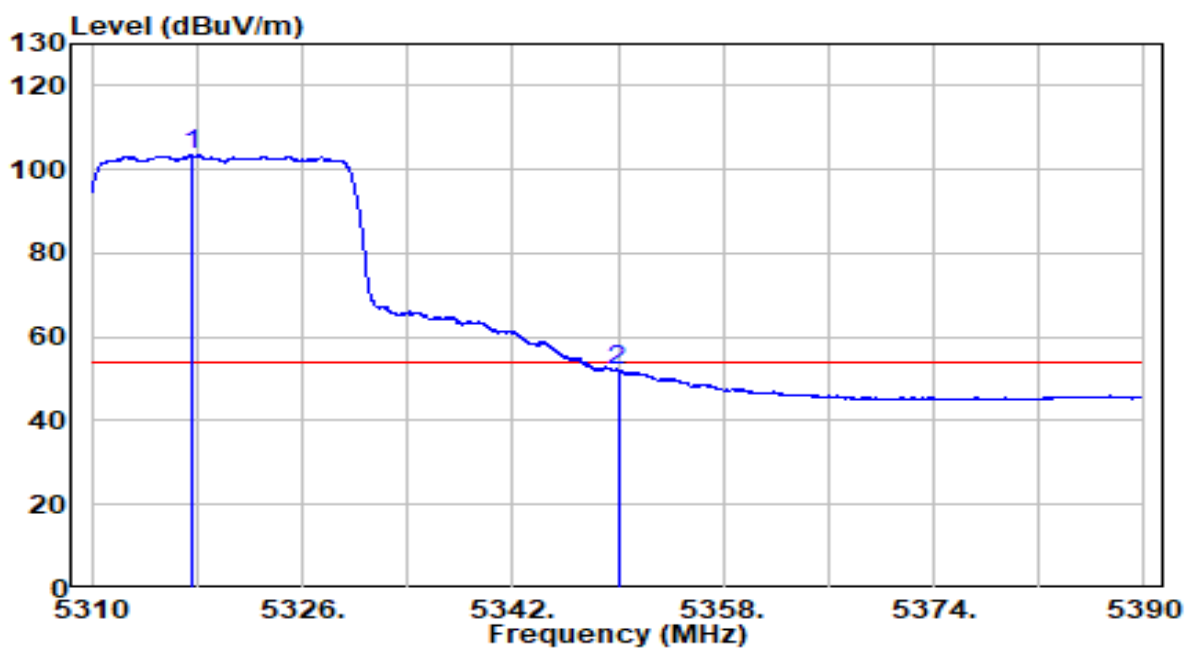


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5317.680	83.39	20.08	103.47	N/A	N/A	Average
2		5350.000	31.95	20.11	52.06	-1.94	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

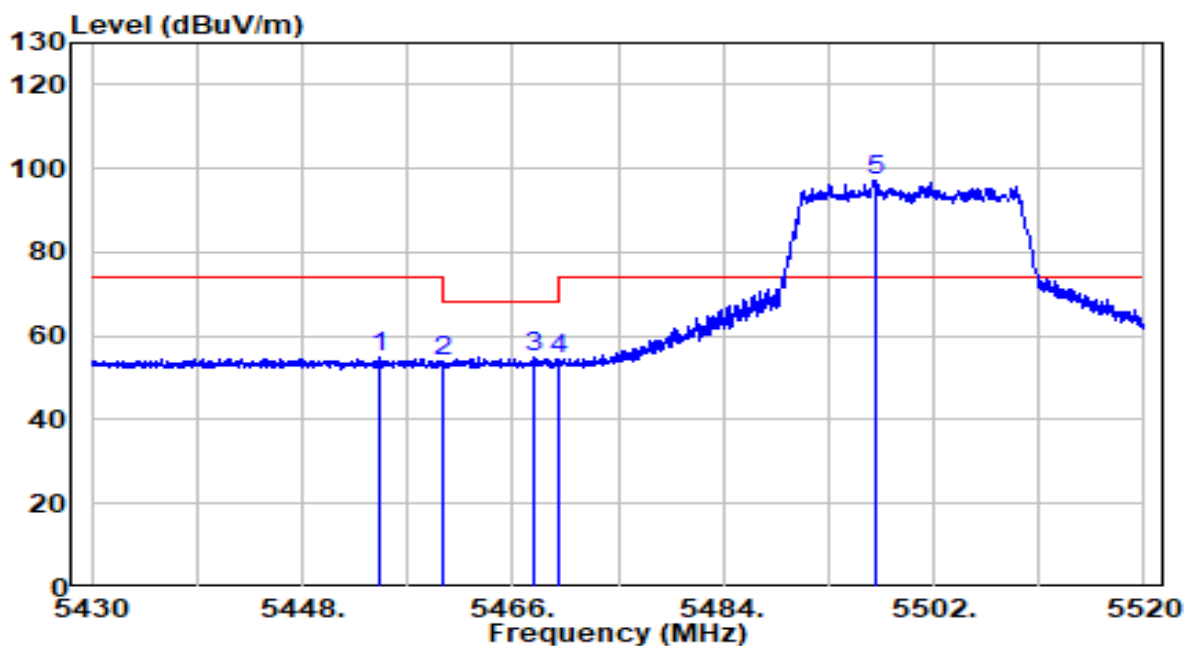


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.525	34.62	20.22	54.84	-19.16	74.00	Peak
2	5460.000	33.72	20.23	53.95	-14.25	68.20	Peak
3	5467.845	34.55	20.24	54.79	-13.41	68.20	Peak
4	5470.000	34.02	20.24	54.26	-13.94	68.20	Peak
5	* 5497.005	77.08	20.27	97.35	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

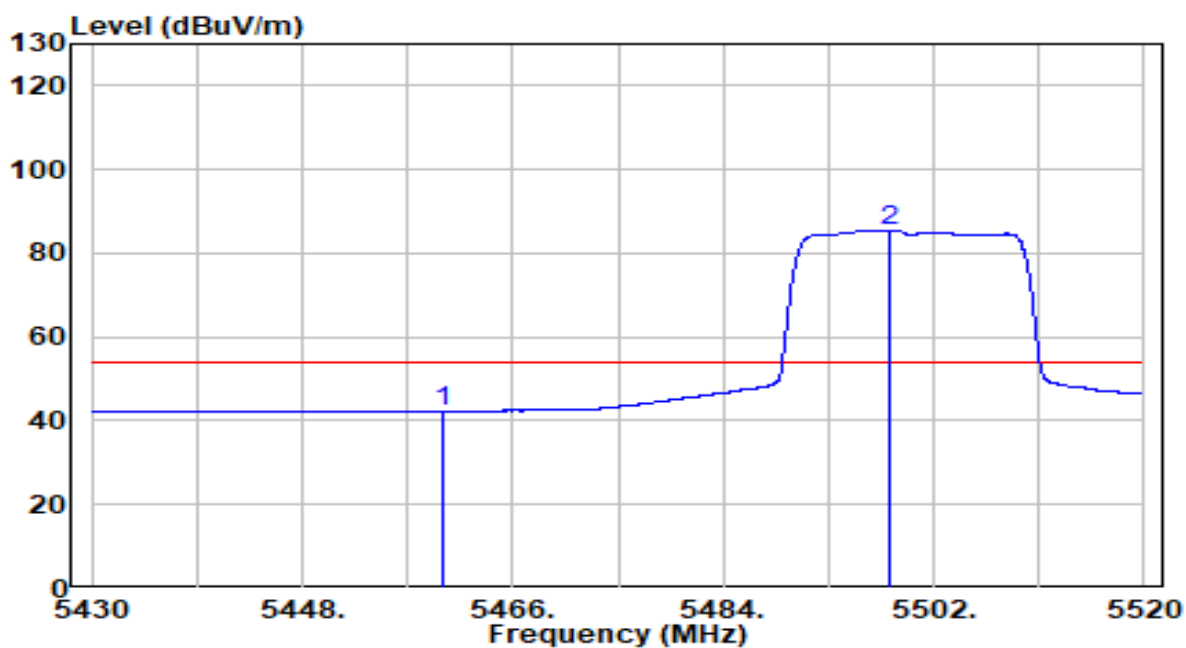


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	22.05	20.23	42.28	-11.72	54.00	Average
2	* 5498.175	65.17	20.27	85.44	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

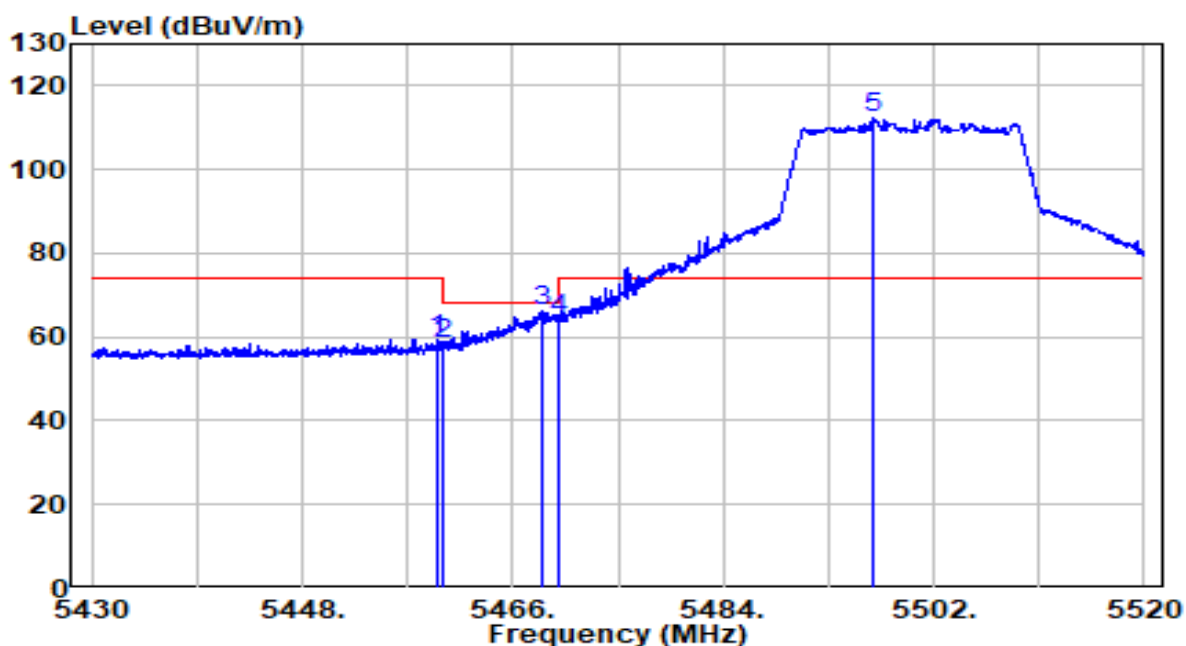


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.565	39.13	20.23	59.36	-14.64	74.00	Peak
2	5460.000	37.94	20.23	58.16	-10.04	68.20	Peak
3	5468.565	45.95	20.24	66.18	-2.02	68.20	Peak
4	5470.000	43.93	20.24	64.17	-4.03	68.20	Peak
5	* 5496.915	91.85	20.27	112.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

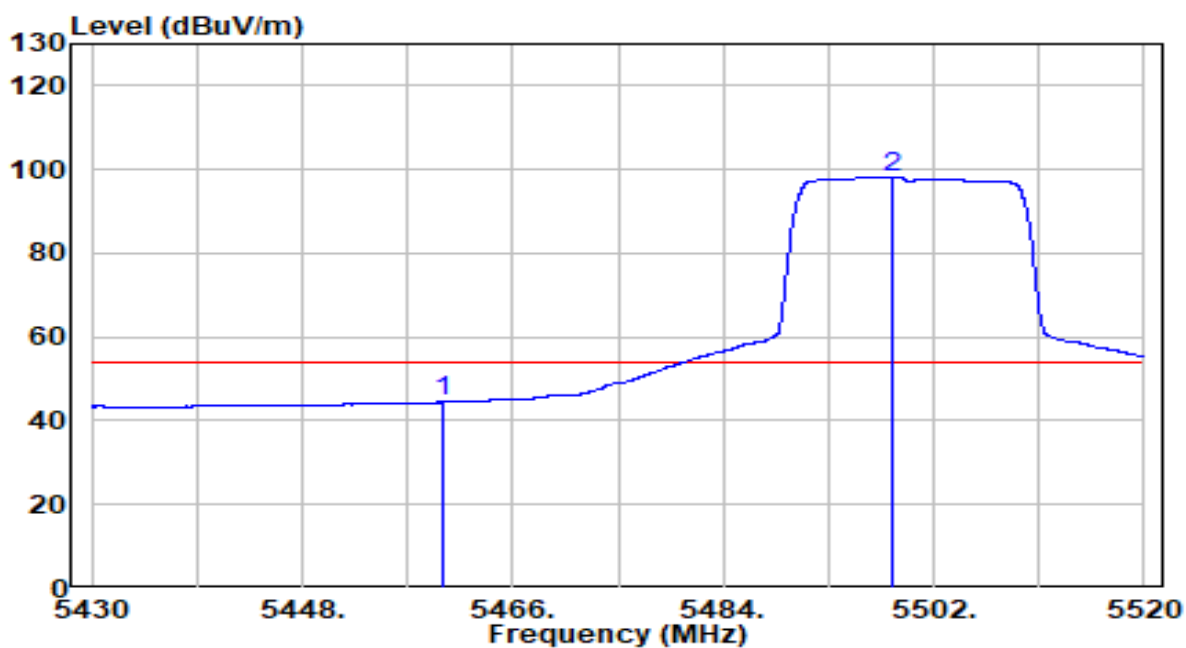


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	24.19	20.23	44.42	-9.58	54.00	Average
2	* 5498.400	77.96	20.27	98.22	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

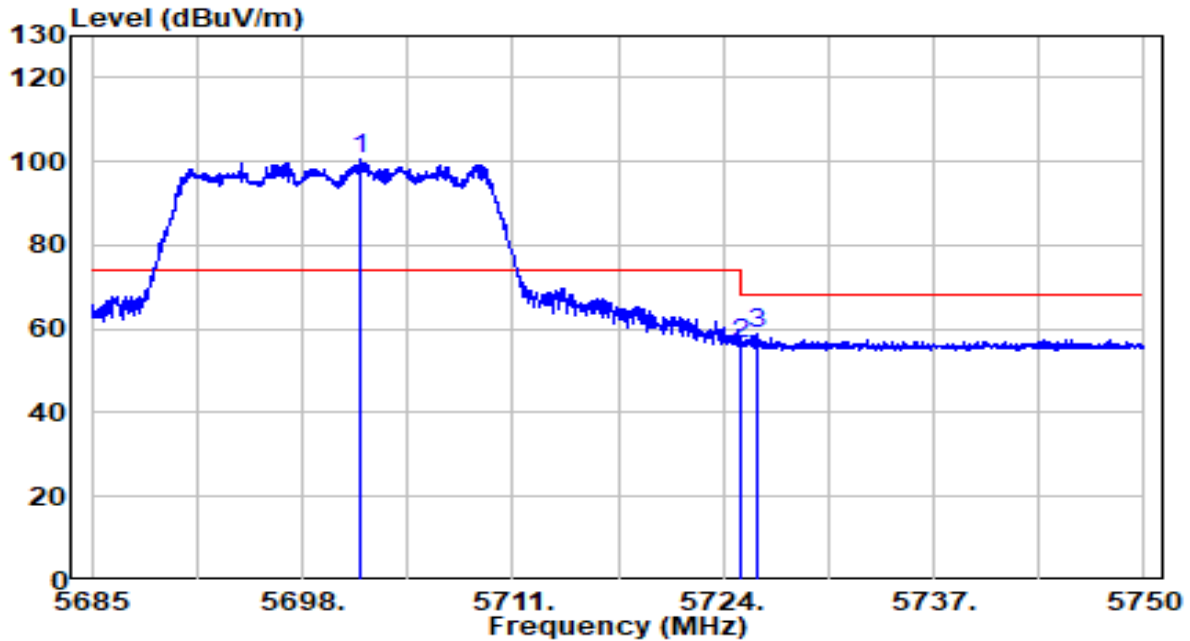


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5701.542	79.54	20.92	100.47	N/A	N/A	Peak
2		5725.000	35.47	21.00	56.47	-11.73	68.20	Peak
3		5726.145	37.90	21.00	58.90	-9.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

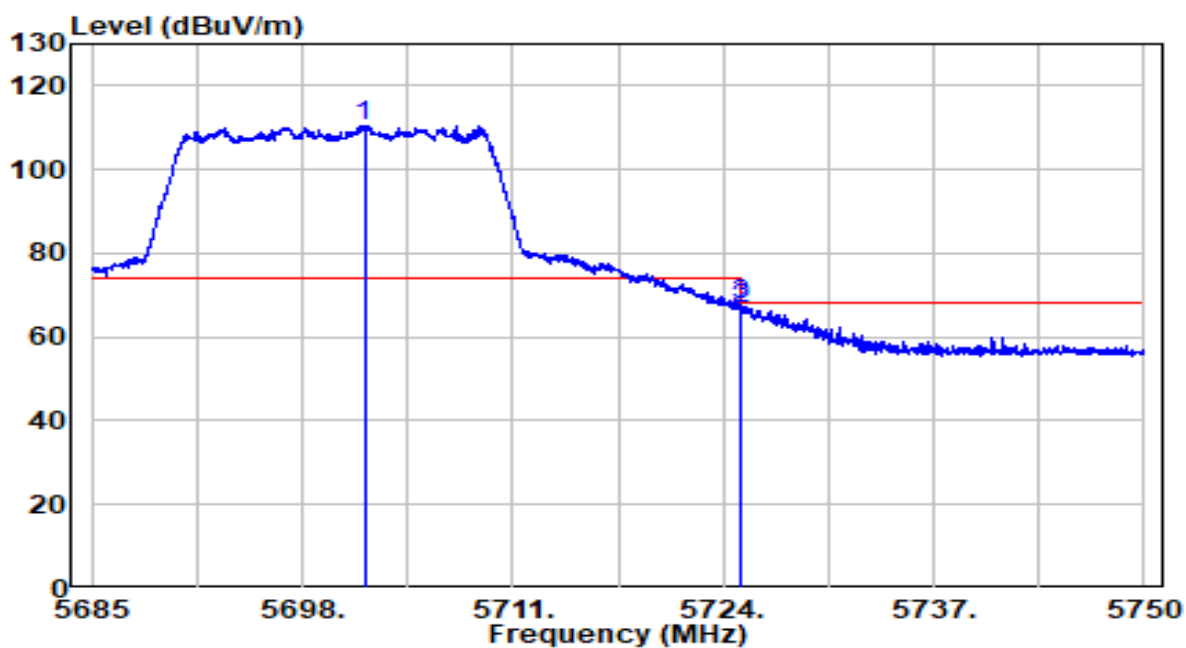


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5701.835	89.70	20.92	110.62	N/A	N/A	Peak
2		5725.000	45.81	21.00	66.81	-1.39	68.20	Peak
3		5725.072	46.54	21.00	67.54	-0.66	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

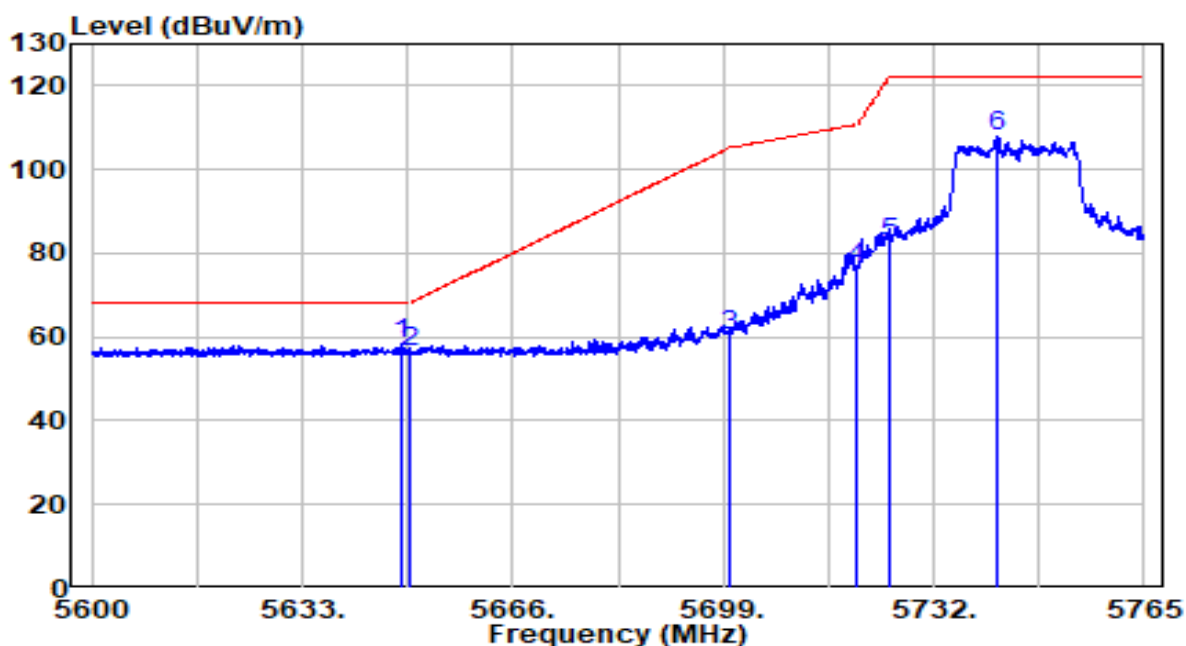


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5648.675	37.67	20.75	58.42	-9.78	68.20	Peak
2		5650.000	35.90	20.76	56.65	-11.55	68.20	Peak
3		5700.000	39.40	20.92	60.32	-44.88	105.20	Peak
4		5720.000	55.58	20.98	76.56	-34.24	110.80	Peak
5		5725.000	61.40	21.00	82.40	-39.80	122.20	Peak
6		5741.982	86.70	21.05	107.75	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

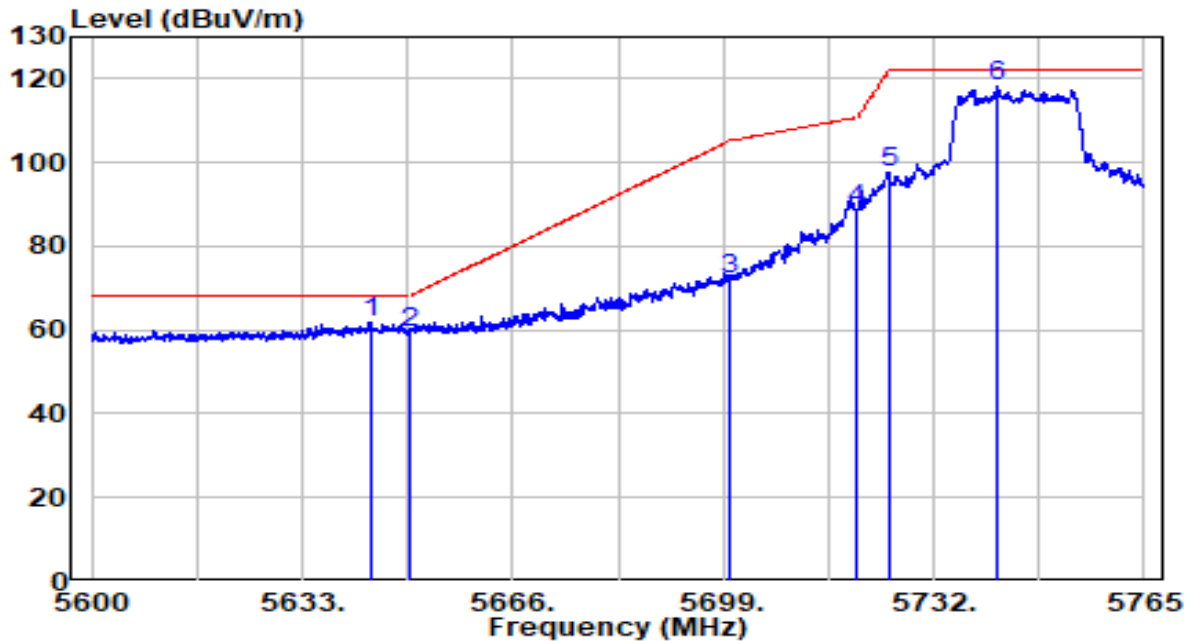


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5643.890	40.94	20.74	61.68	-6.52	68.20	Peak
2	5650.000	38.51	20.76	59.27	-8.93	68.20	Peak
3	5700.000	51.16	20.92	72.08	-33.12	105.20	Peak
4	5720.000	67.91	20.98	88.89	-21.91	110.80	Peak
5	5725.000	76.39	21.00	97.39	-24.81	122.20	Peak
6	* 5742.147	97.03	21.05	118.09	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

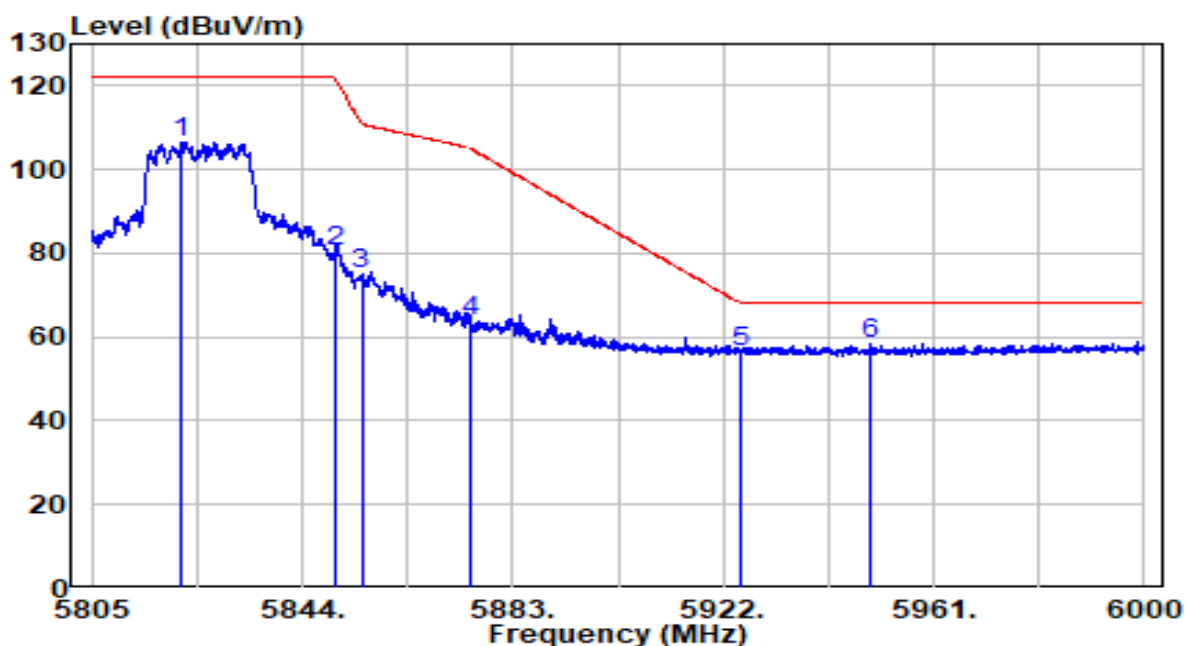


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5821.770	85.20	21.31	106.51	N/A	N/A	Peak
2	5850.000	59.12	21.40	80.52	-41.68	122.20	Peak
3	5855.000	53.87	21.42	75.29	-35.51	110.80	Peak
4	5875.000	42.28	21.49	63.76	-41.44	105.20	Peak
5	5925.000	34.90	21.65	56.55	-11.65	68.20	Peak
6	* 5949.203	36.54	21.73	58.26	-9.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

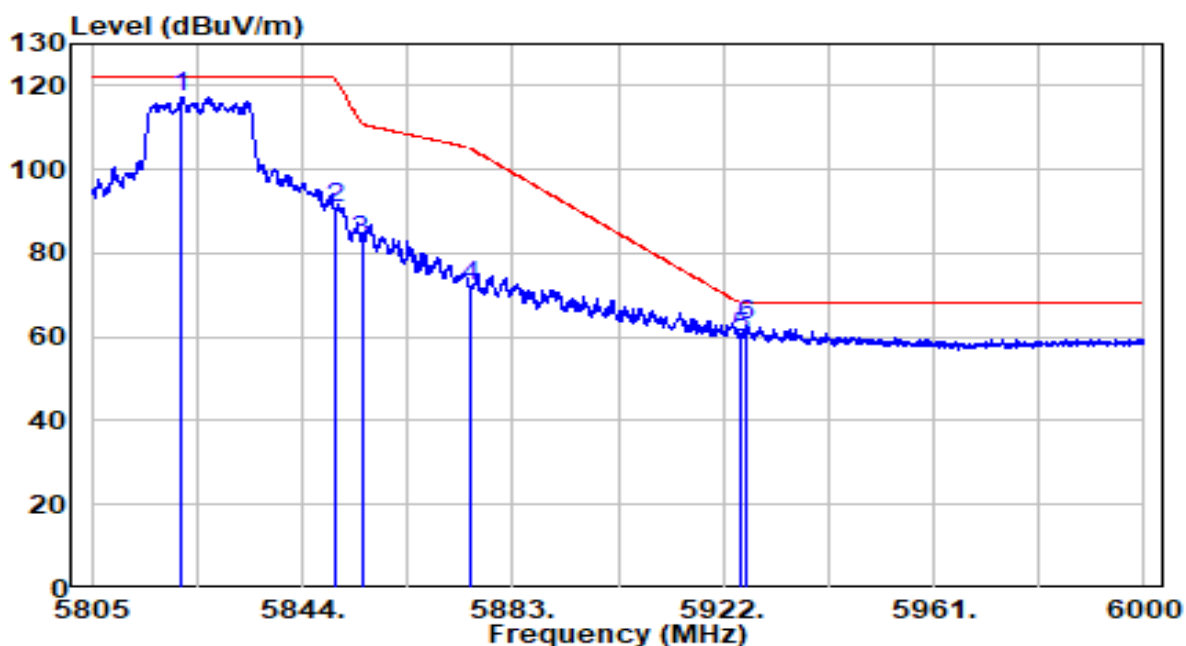


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5821.770	96.04	21.31	117.35	N/A	N/A	Peak
2		5850.000	69.28	21.40	90.68	-31.52	122.20	Peak
3		5855.000	61.52	21.42	82.94	-27.86	110.80	Peak
4		5875.000	50.48	21.49	71.97	-33.23	105.20	Peak
5		5925.000	38.43	21.65	60.07	-8.13	68.20	Peak
6		5926.388	40.98	21.65	62.63	-5.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

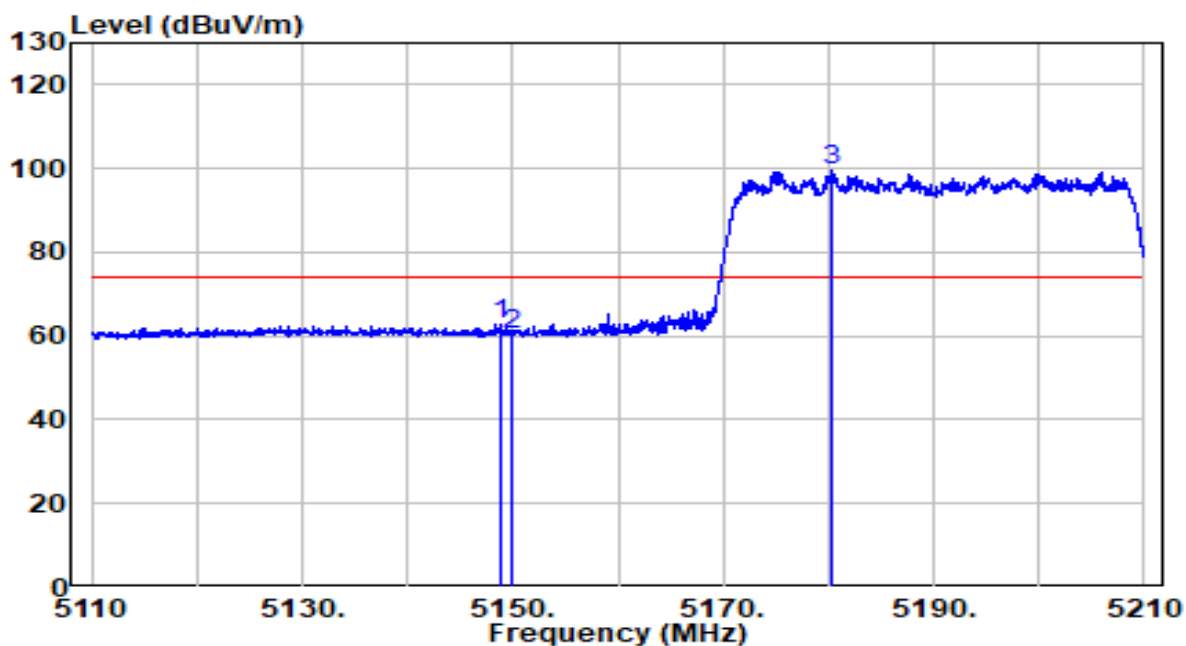


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.850	42.78	19.90	62.68	-11.32	74.00	Peak
2	5150.000	40.60	19.91	60.51	-13.49	74.00	Peak
3	* 5180.250	79.51	19.94	99.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

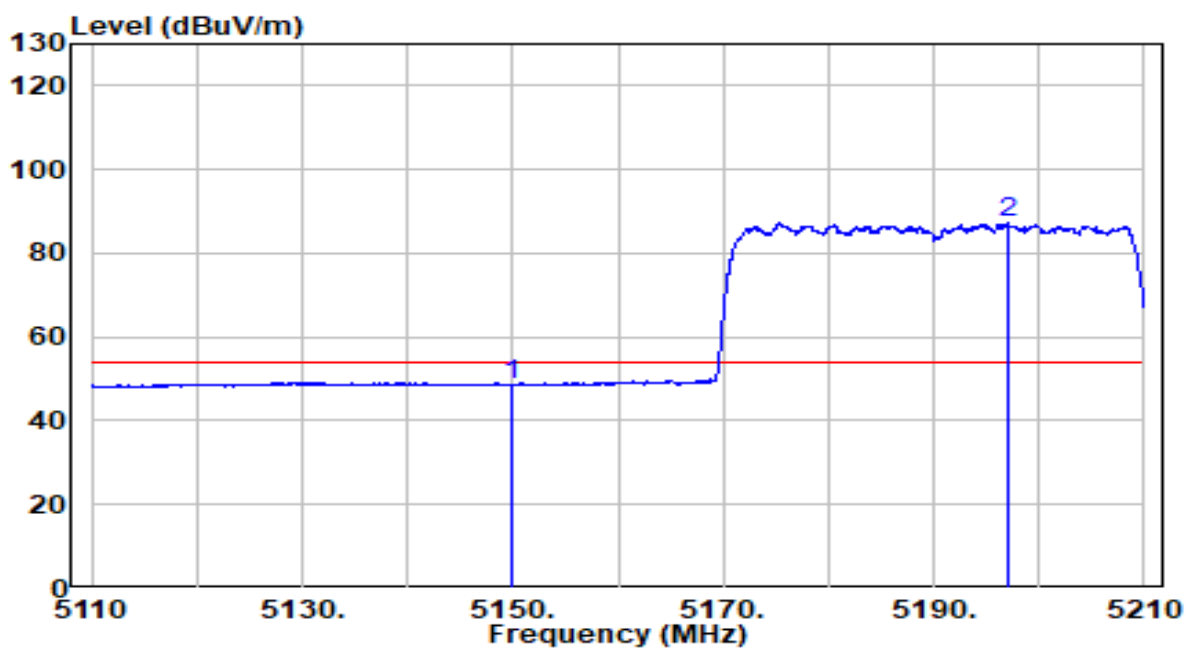


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.67	19.91	48.57	-5.43	54.00	Average
2	* 5197.050	67.29	19.95	87.24	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

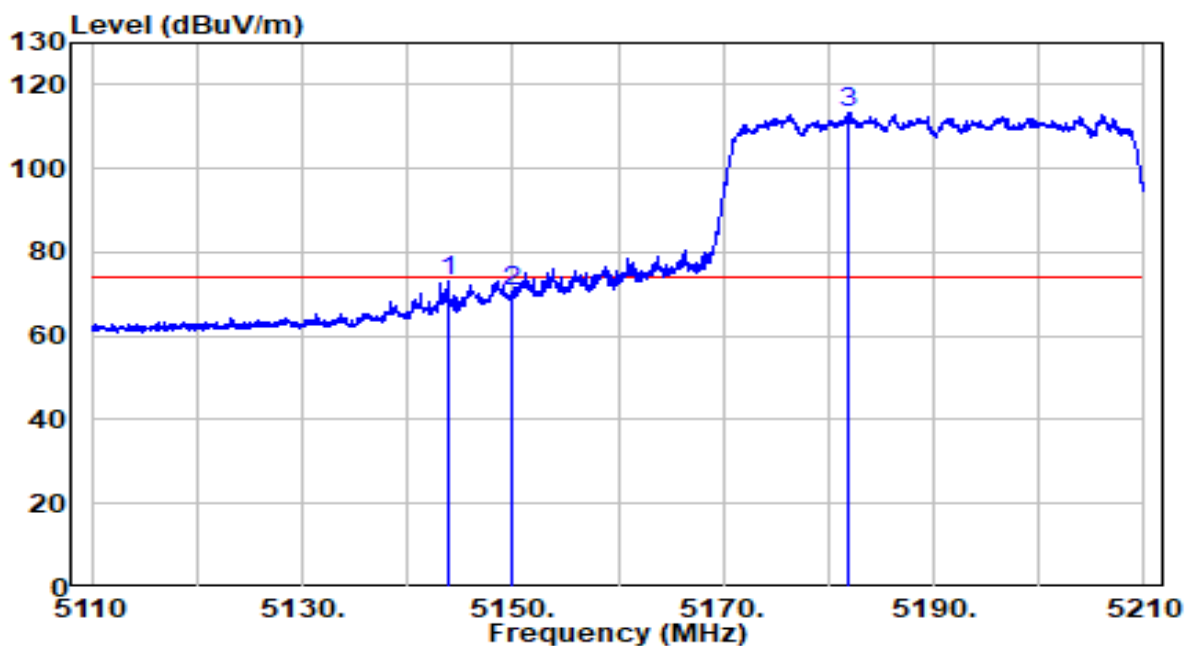


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.800	53.24	19.90	73.14	-0.86	74.00	Peak
2	5150.000	50.78	19.91	70.68	-3.32	74.00	Peak
3	* 5181.850	93.51	19.94	113.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

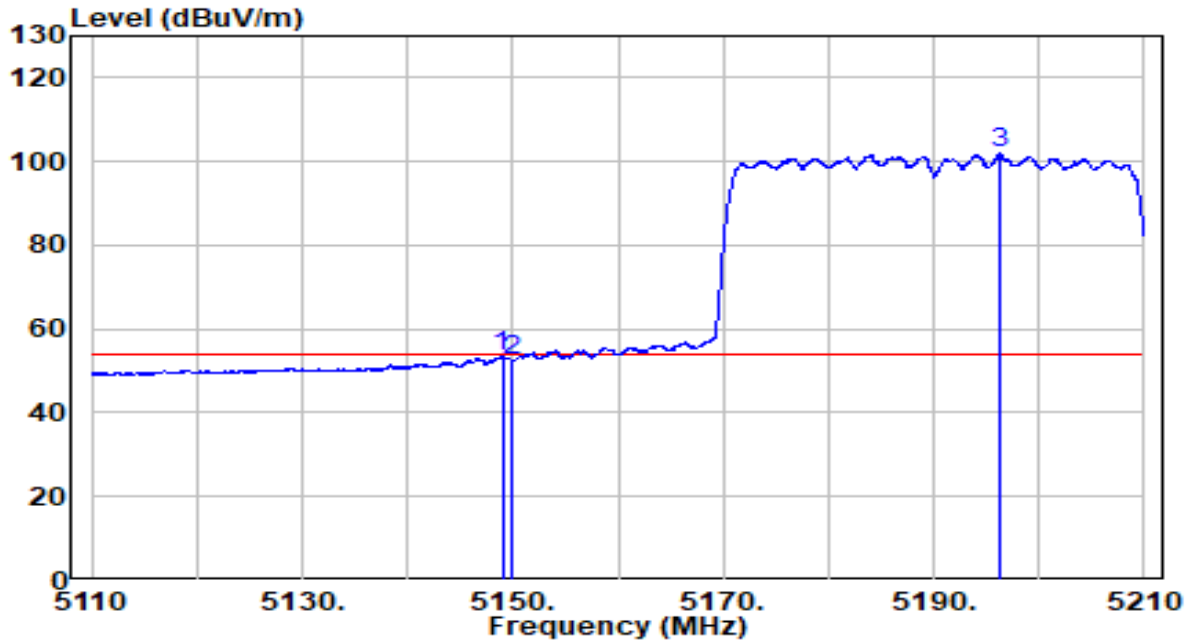


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.000	33.39	19.90	53.30	-0.70	54.00	Average
2	5150.000	32.72	19.91	52.62	-1.38	54.00	Average
3	* 5196.300	82.16	19.95	102.12	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

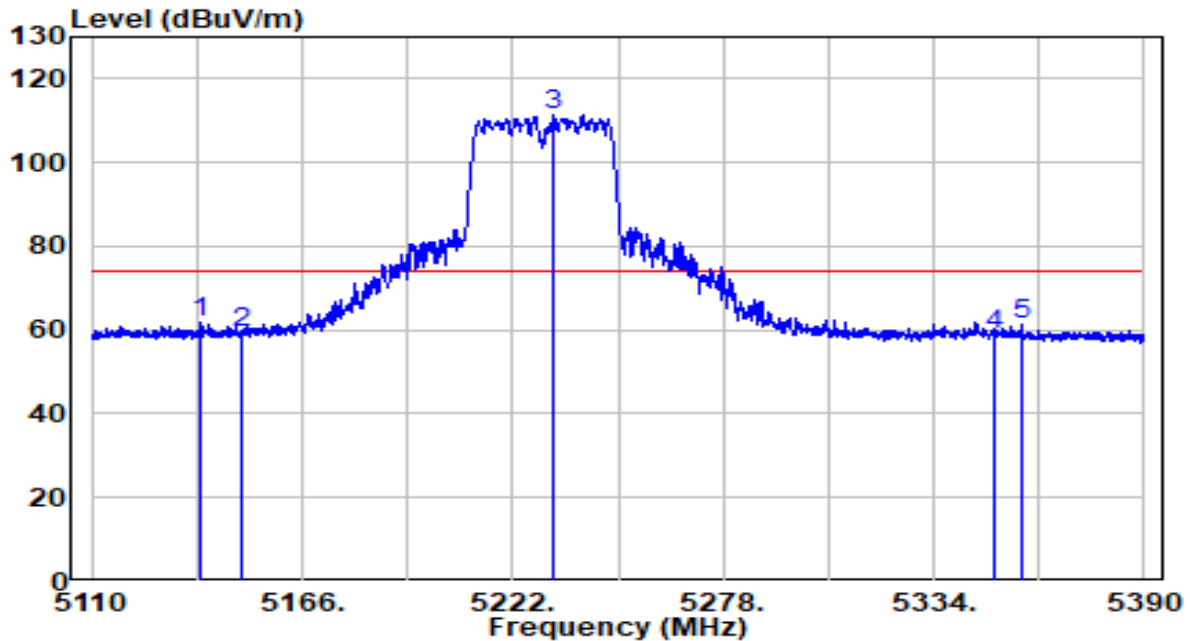


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5139.120	41.98	19.89	61.87	-12.13	74.00	Peak
2	5150.000	39.50	19.91	59.40	-14.60	74.00	Peak
3	* 5232.920	91.42	19.99	111.41	N/A	N/A	Peak
4	5350.000	38.72	20.11	58.83	-15.17	74.00	Peak
5	5357.240	41.01	20.12	61.13	-12.87	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

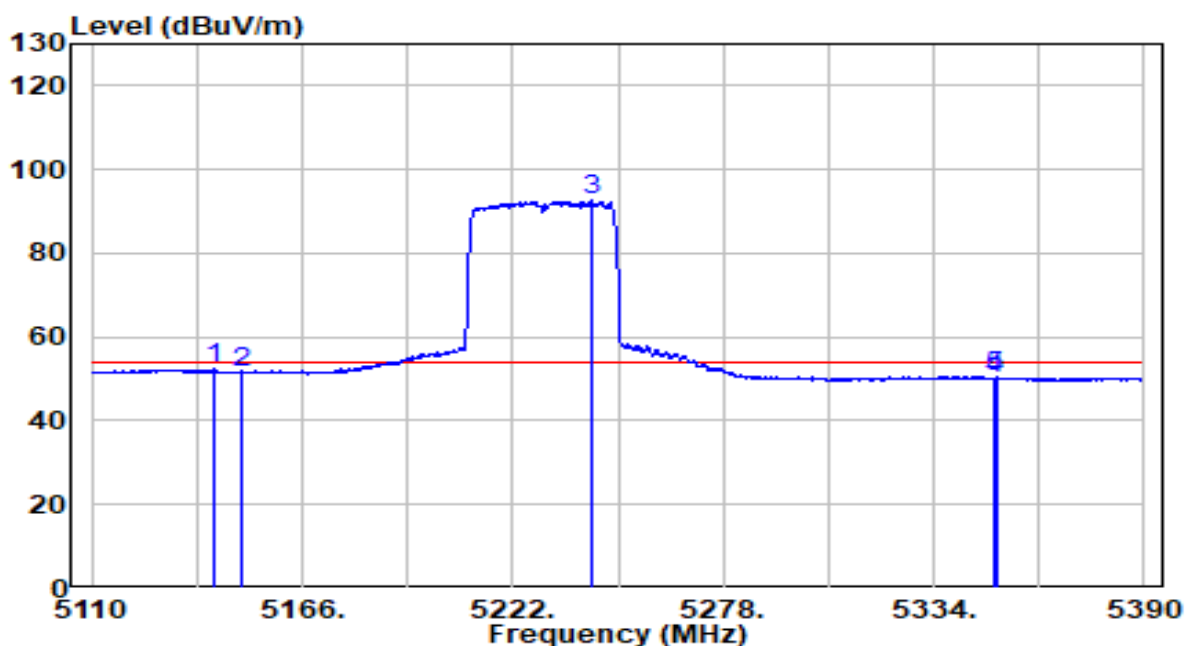


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5142.760	32.36	19.90	52.26	-1.74	54.00	Average
2	5150.000	31.74	19.91	51.65	-2.35	54.00	Average
3	* 5243.000	72.67	20.00	92.68	N/A	N/A	Average
4	5350.000	29.91	20.11	50.03	-3.97	54.00	Average
5	5350.520	30.24	20.11	50.35	-3.65	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

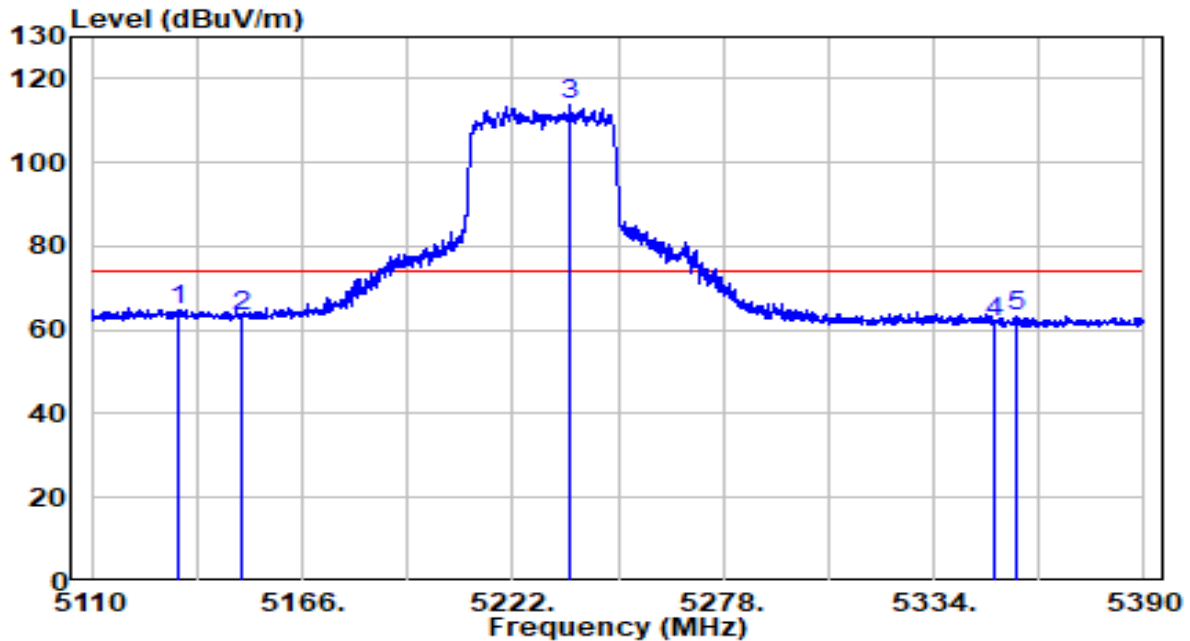


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5133.240	45.08	19.89	64.97	-9.03	74.00	Peak
2	5150.000	43.37	19.91	63.27	-10.73	74.00	Peak
3	* 5237.400	93.86	20.00	113.86	N/A	N/A	Peak
4	5350.000	41.57	20.11	61.68	-12.32	74.00	Peak
5	5356.120	43.24	20.12	63.36	-10.64	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

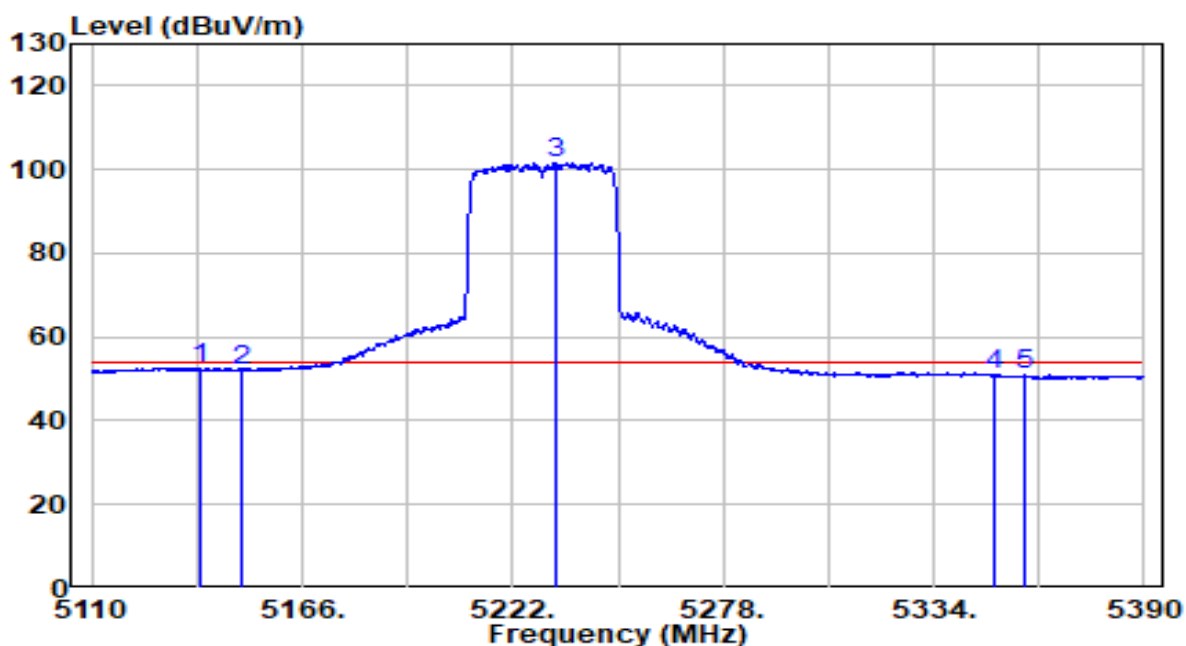


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5138.700	32.72	19.89	52.61	-1.39	54.00	Average
2	5150.000	32.15	19.91	52.05	-1.95	54.00	Average
3	* 5233.200	81.56	19.99	101.55	N/A	N/A	Average
4	5350.000	30.66	20.11	50.78	-3.22	54.00	Average
5	5358.360	30.79	20.12	50.92	-3.08	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

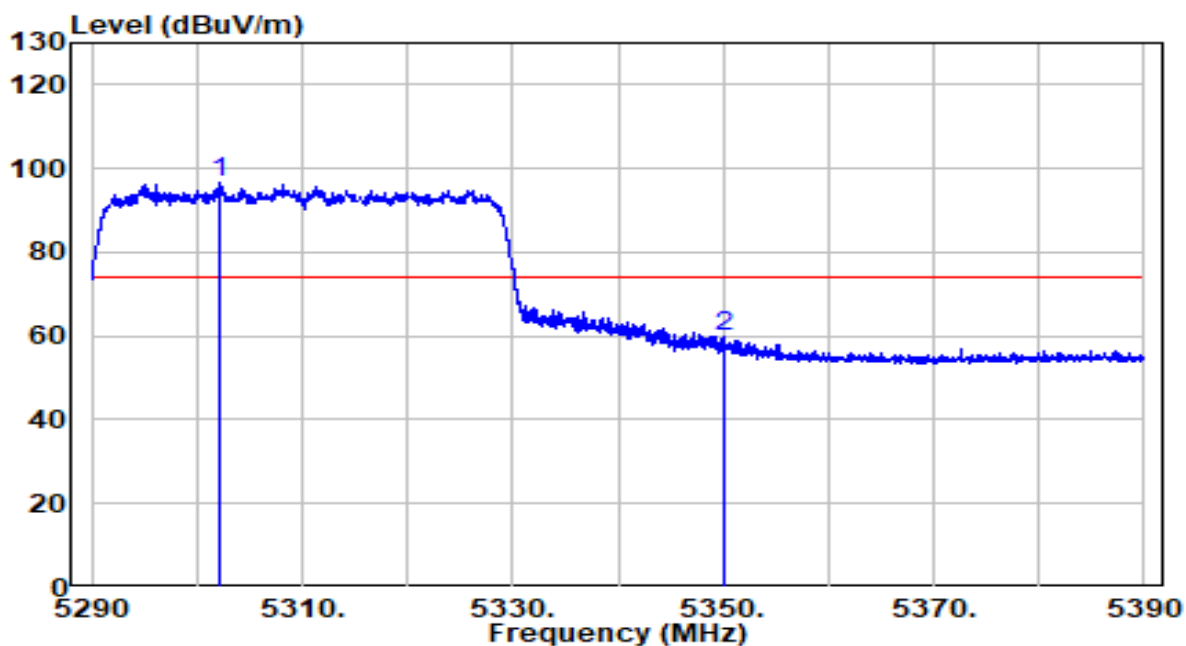


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5302.200	80.15	16.32	96.46	N/A	N/A	Peak
2		5350.000	43.55	16.08	59.63	-14.37	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

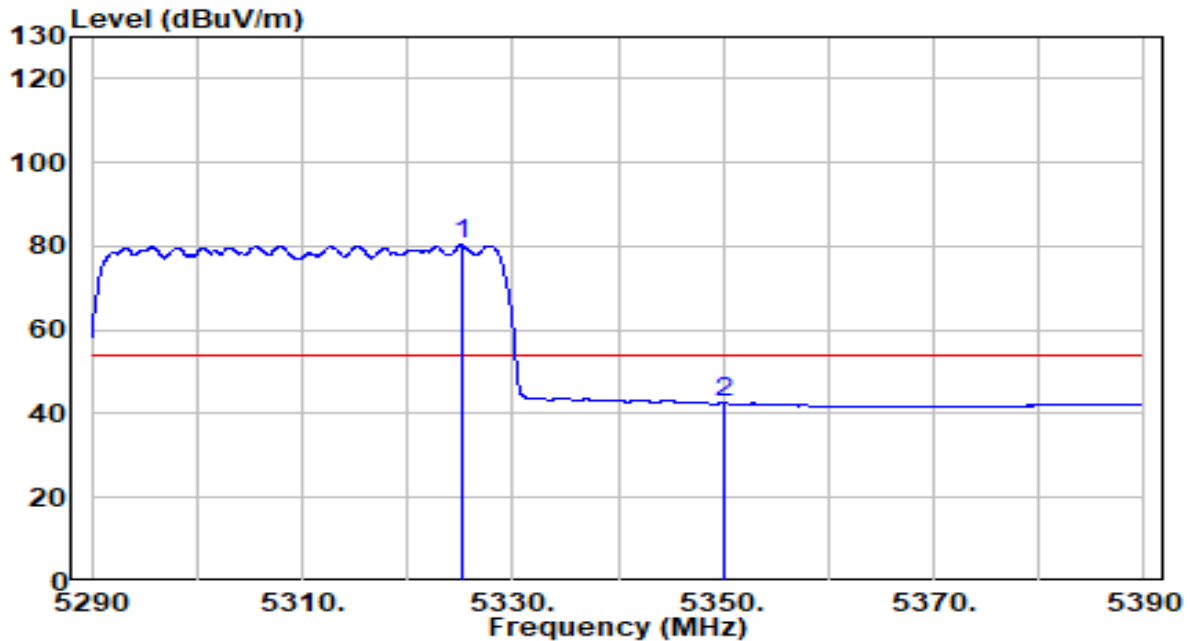


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5325.150	64.42	15.81	80.23	N/A	N/A	Average
2		5350.000	26.37	16.08	42.45	-11.55	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

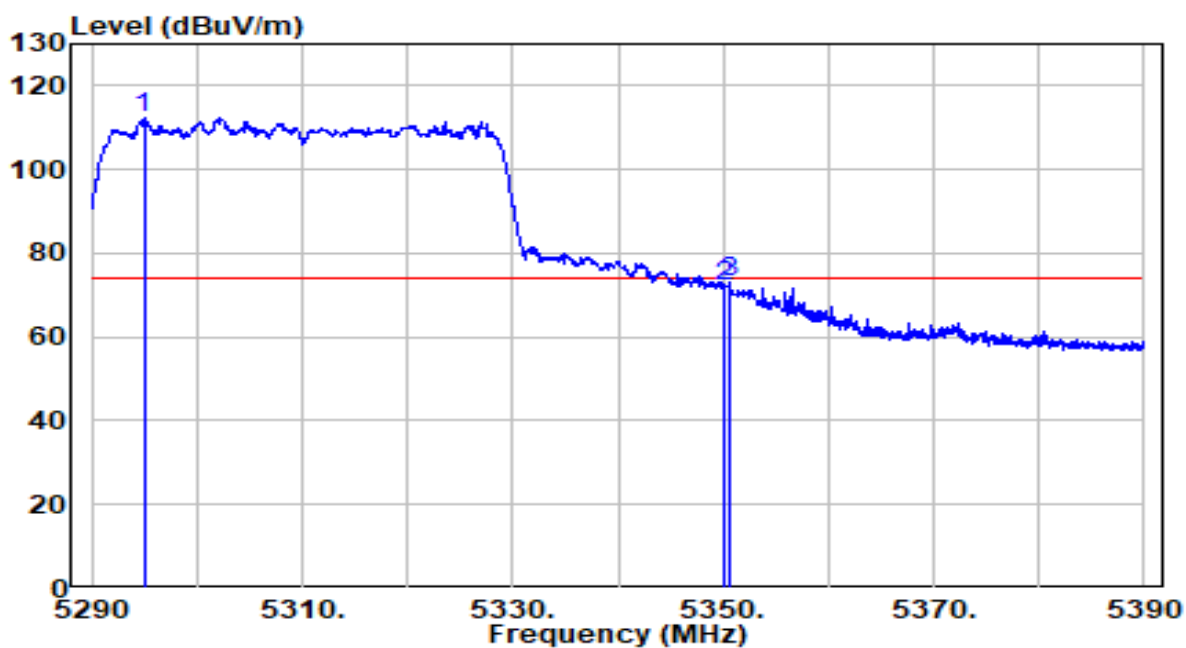


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5294.950	95.86	16.32	112.18	N/A	N/A	Peak
2		5350.000	55.91	16.08	71.99	-2.01	74.00	Peak
3		5350.550	57.25	16.08	73.33	-0.67	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

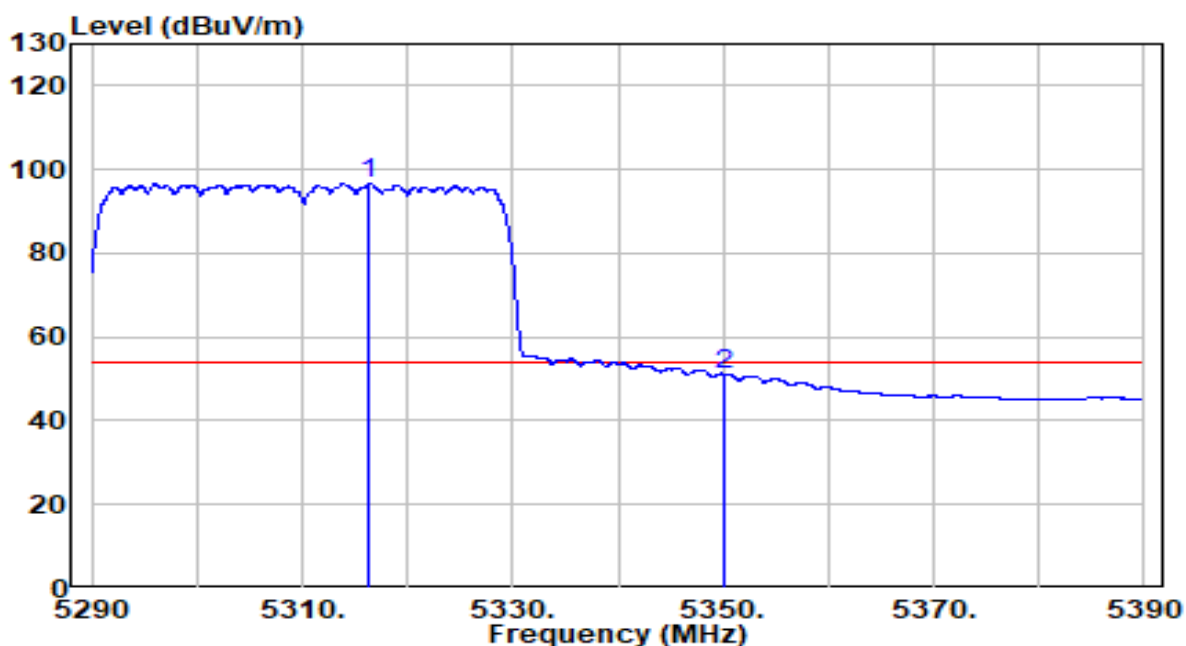


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5316.400	80.57	15.98	96.55	N/A	N/A	Average
2		5350.000	35.18	16.08	51.26	-2.74	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

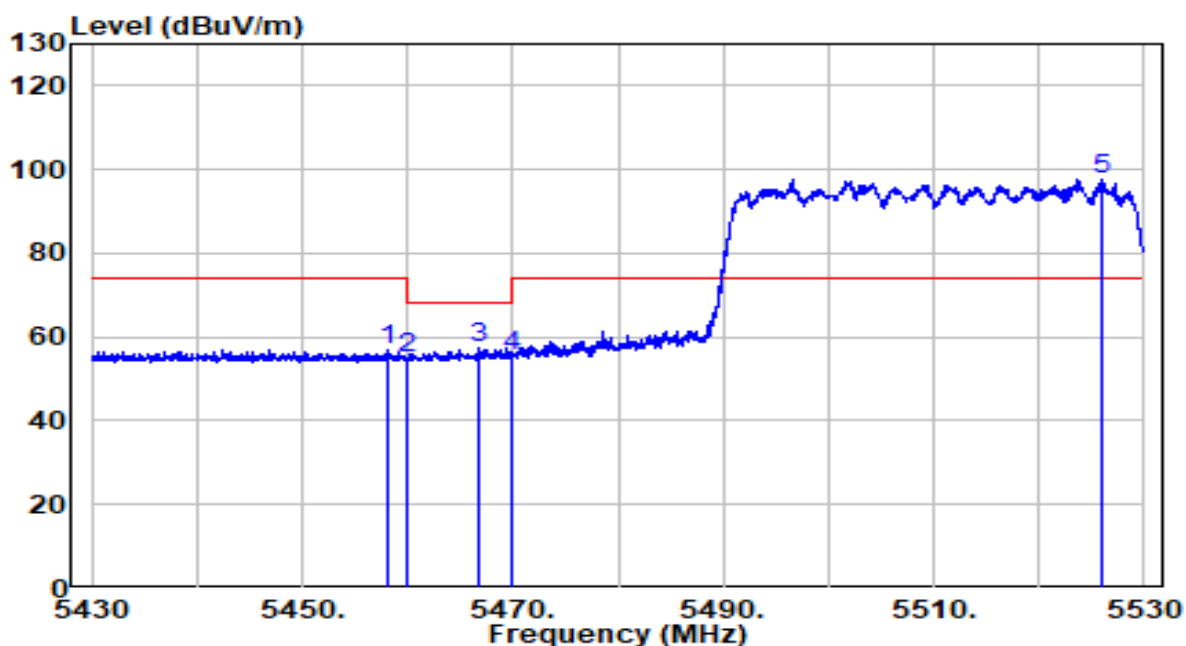


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.250	36.56	20.23	56.78	-17.22	74.00	Peak
2	5460.000	34.95	20.23	55.18	-13.02	68.20	Peak
3	5466.800	37.03	20.24	57.27	-10.93	68.20	Peak
4	5470.000	35.25	20.24	55.49	-12.71	68.20	Peak
5	* 5525.950	77.41	20.35	97.76	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

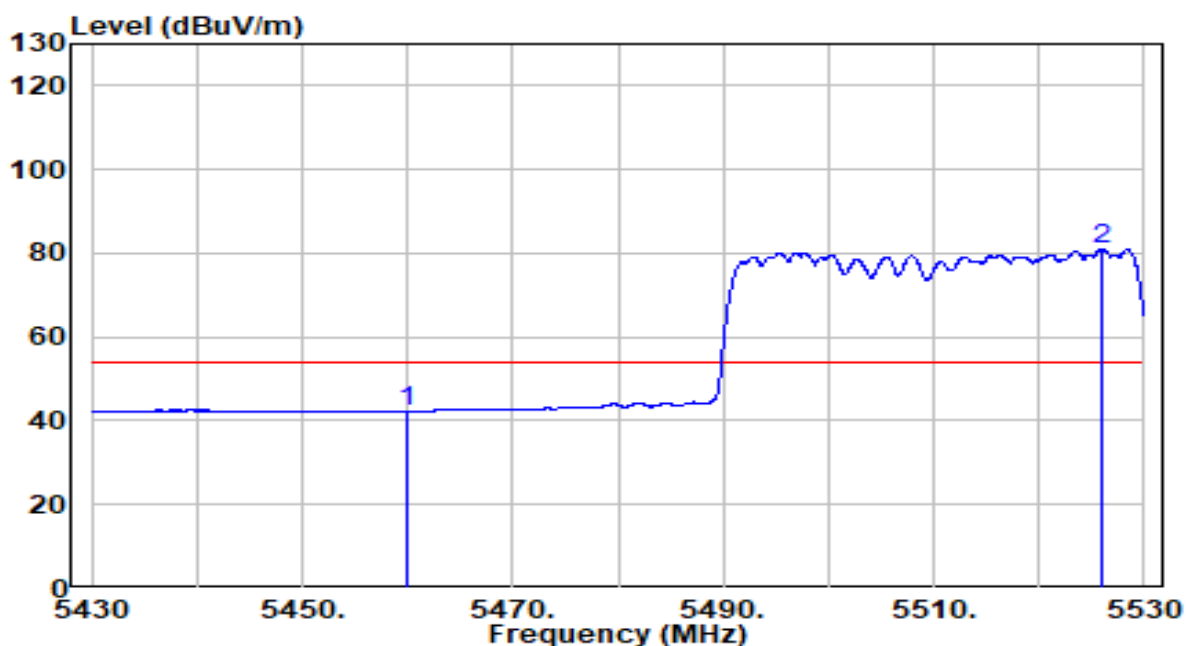


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	22.17	20.23	42.39	-11.61	54.00	Average
2	* 5525.950	60.66	20.35	81.01	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

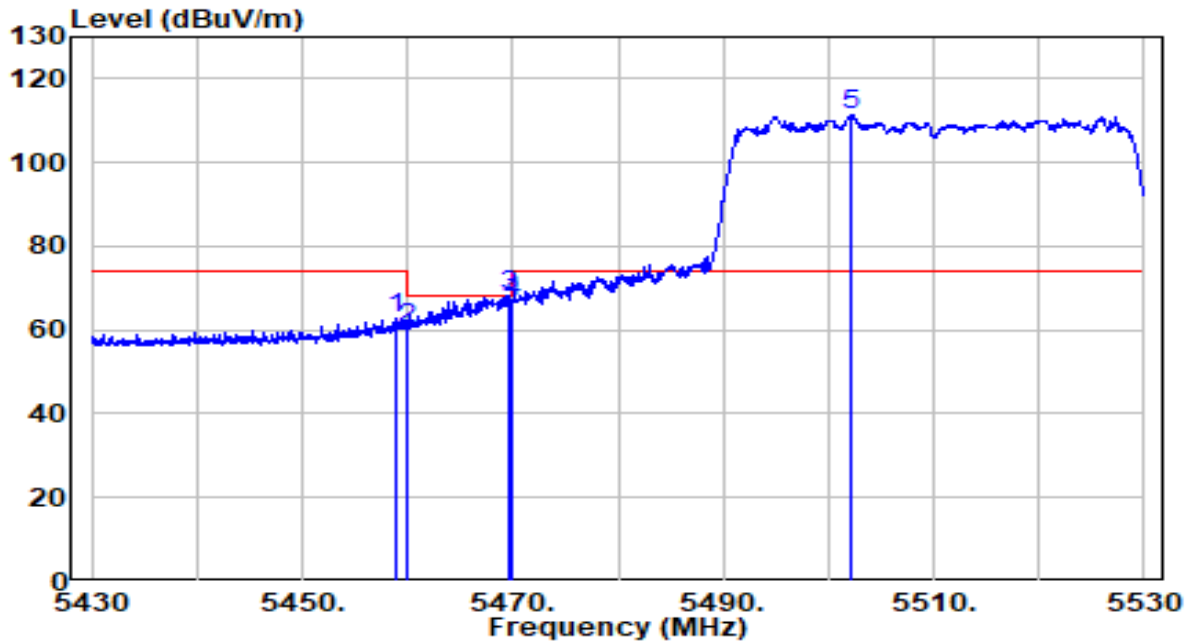


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.800	42.69	20.23	62.91	-11.09	74.00	Peak
2	5460.000	40.13	20.23	60.36	-7.84	68.20	Peak
3	5469.600	47.94	20.24	68.18	-0.02	68.20	Peak
4	5470.000	46.72	20.24	66.96	-1.24	68.20	Peak
5	* 5502.250	91.00	20.28	111.28	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

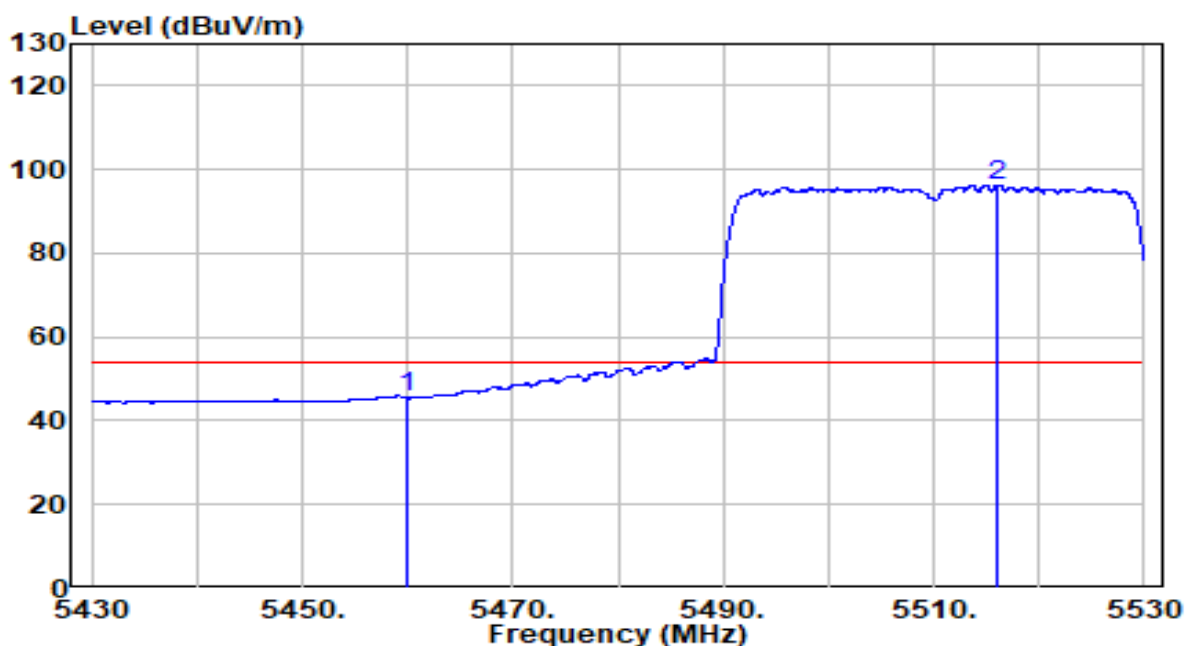


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	25.20	20.23	45.42	-8.58	54.00	Average
2	* 5516.150	76.03	20.32	96.35	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz - CDD Mode	Test Voltage	110V/60Hz

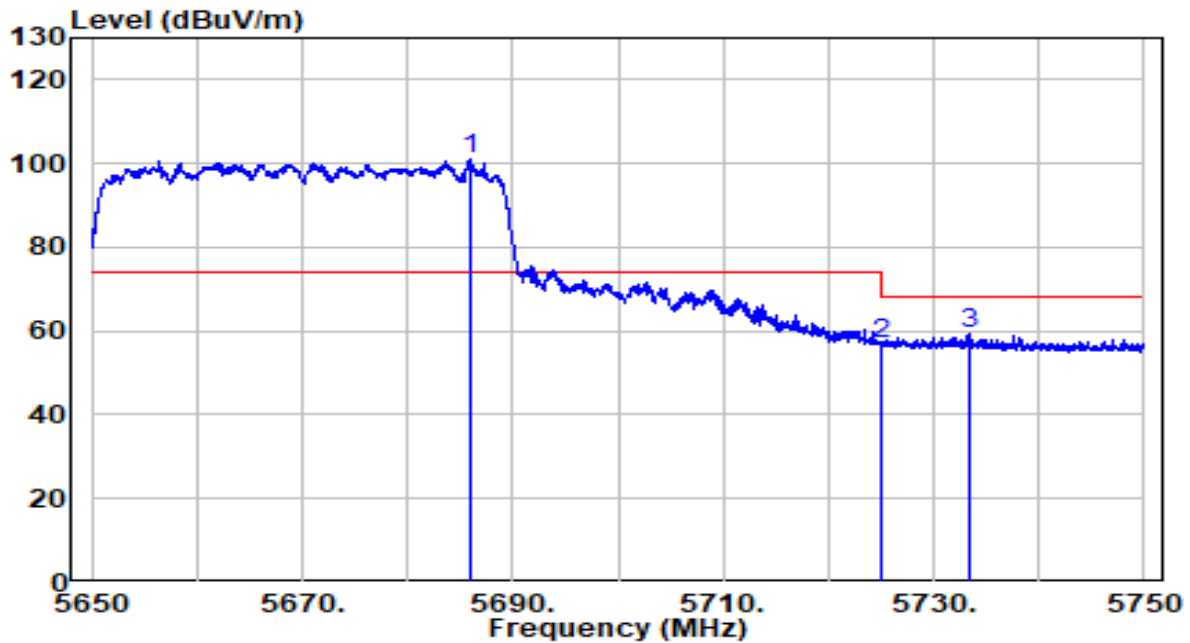


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5685.900	80.00	20.87	100.87	N/A	N/A	Peak
2		5725.000	35.78	21.00	56.78	-11.42	68.20	Peak
3		5733.500	38.30	21.03	59.33	-8.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz - CDD Mode	Test Voltage	110V/60Hz

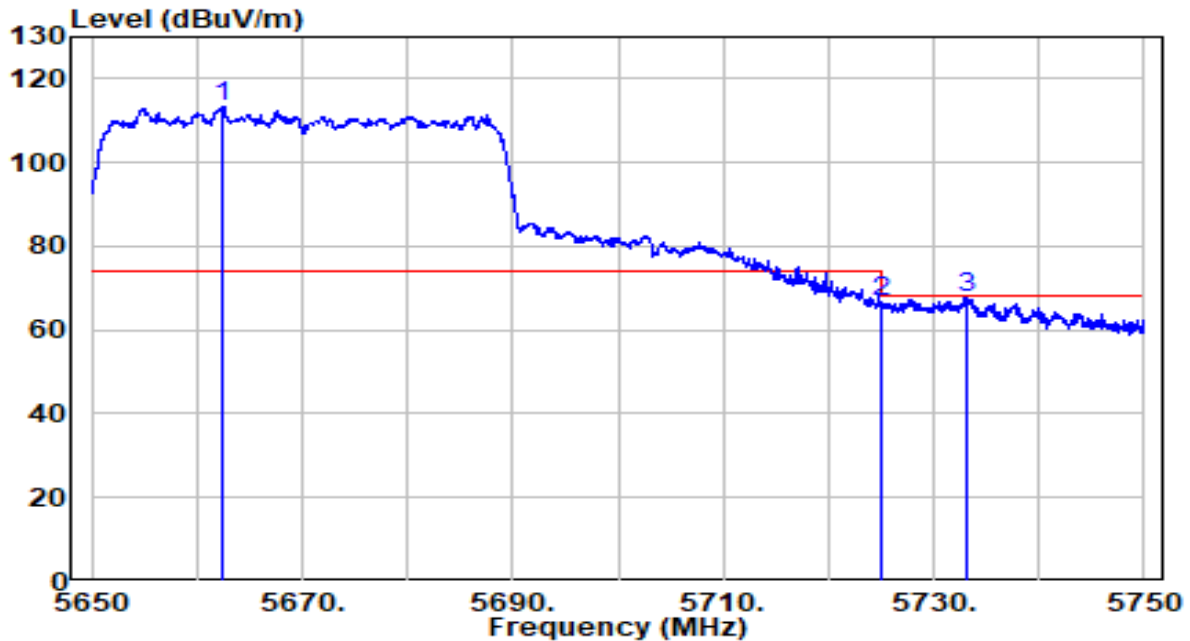


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5662.500	92.34	20.80	113.14	N/A	N/A	Peak
2		5725.000	45.76	21.00	66.76	-1.44	68.20	Peak
3		5733.150	46.51	21.03	67.53	-0.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz - CDD Mode	Test Voltage	110V/60Hz

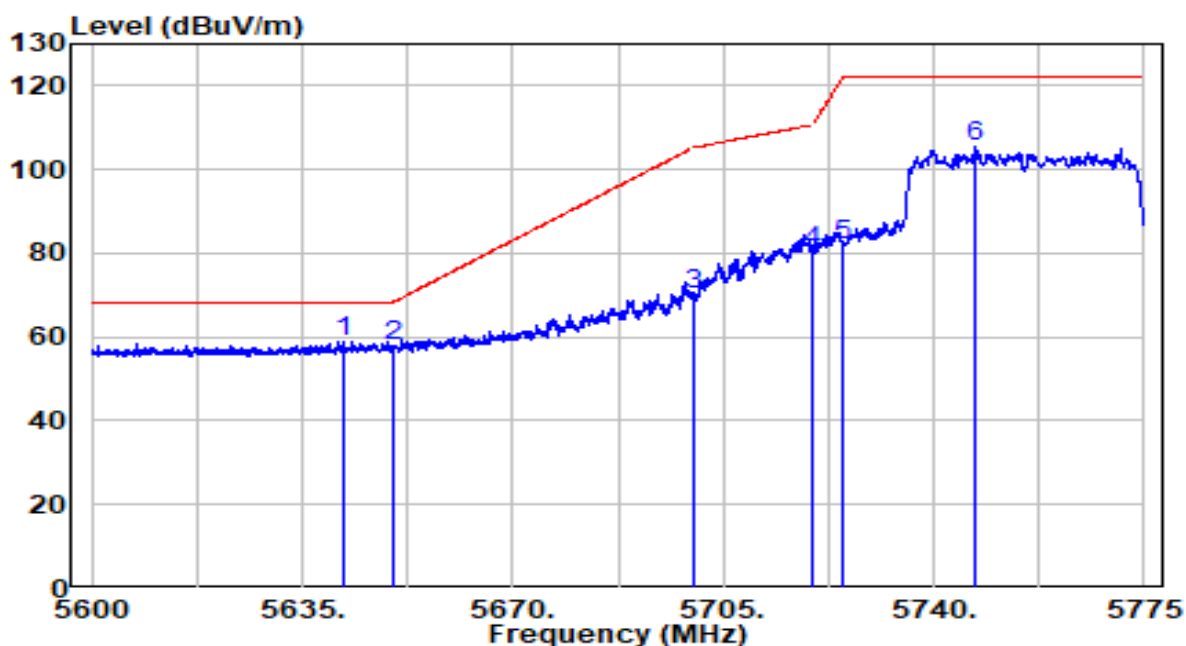


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5642.000	38.38	20.73	59.11	-9.09	68.20	Peak
2		5650.000	37.27	20.76	58.03	-10.17	68.20	Peak
3		5700.000	49.21	20.92	70.13	-35.07	105.20	Peak
4		5720.000	59.68	20.98	80.66	-30.14	110.80	Peak
5		5725.000	60.73	21.00	81.73	-40.47	122.20	Peak
6		5747.087	84.21	21.07	105.28	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz - CDD Mode	Test Voltage	110V/60Hz

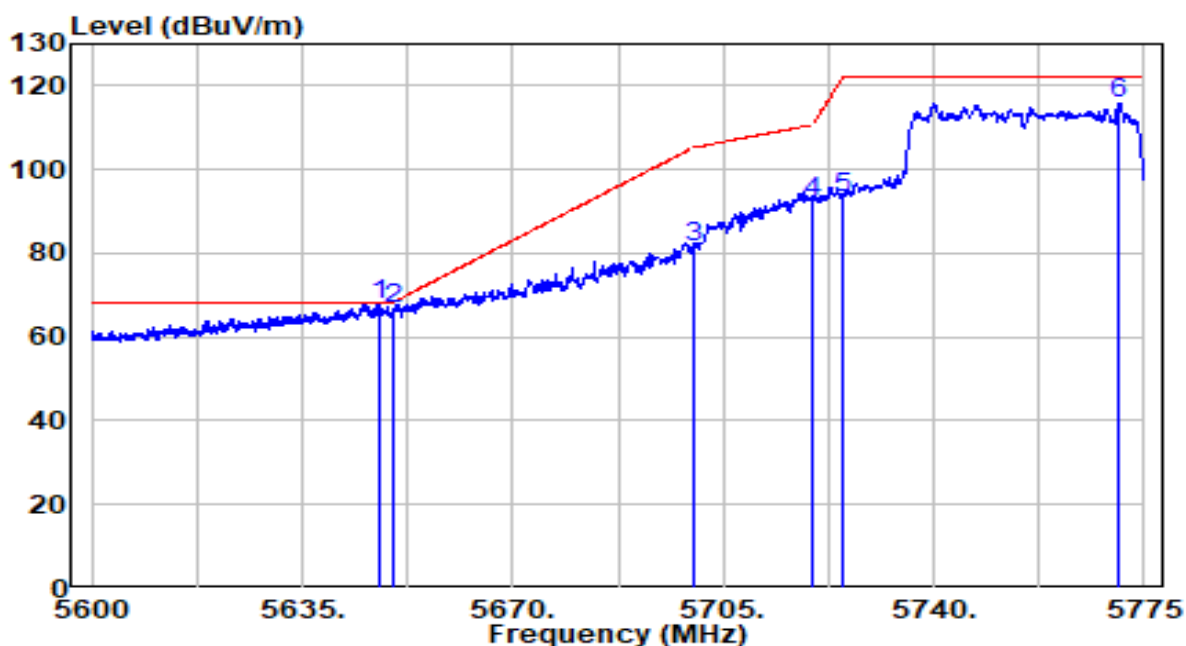


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5647.775	47.18	20.75	67.93	-0.27	68.20	Peak
2		5650.000	45.80	20.76	66.56	-1.64	68.20	Peak
3		5700.000	60.72	20.92	81.64	-23.56	105.20	Peak
4		5720.000	71.38	20.98	92.36	-18.44	110.80	Peak
5		5725.000	72.31	21.00	93.31	-28.89	122.20	Peak
6		5770.888	94.64	21.15	115.79	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz - CDD Mode	Test Voltage	110V/60Hz

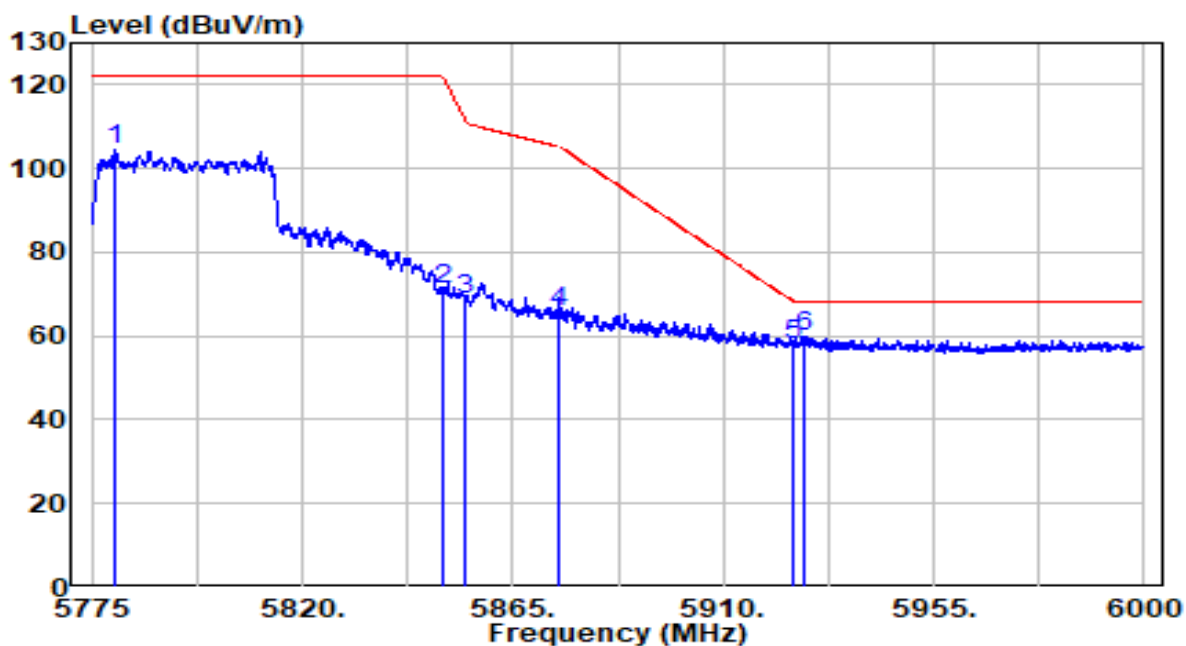


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5779.950	83.48	21.18	104.66	N/A	N/A	Peak
2	5850.000	49.88	21.40	71.28	-50.92	122.20	Peak
3	5855.000	47.37	21.42	68.79	-42.01	110.80	Peak
4	5875.000	44.23	21.49	65.71	-39.49	105.20	Peak
5	5925.000	36.28	21.65	57.93	-10.27	68.20	Peak
6	* 5927.212	38.30	21.65	59.95	-8.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz - CDD Mode	Test Voltage	110V/60Hz

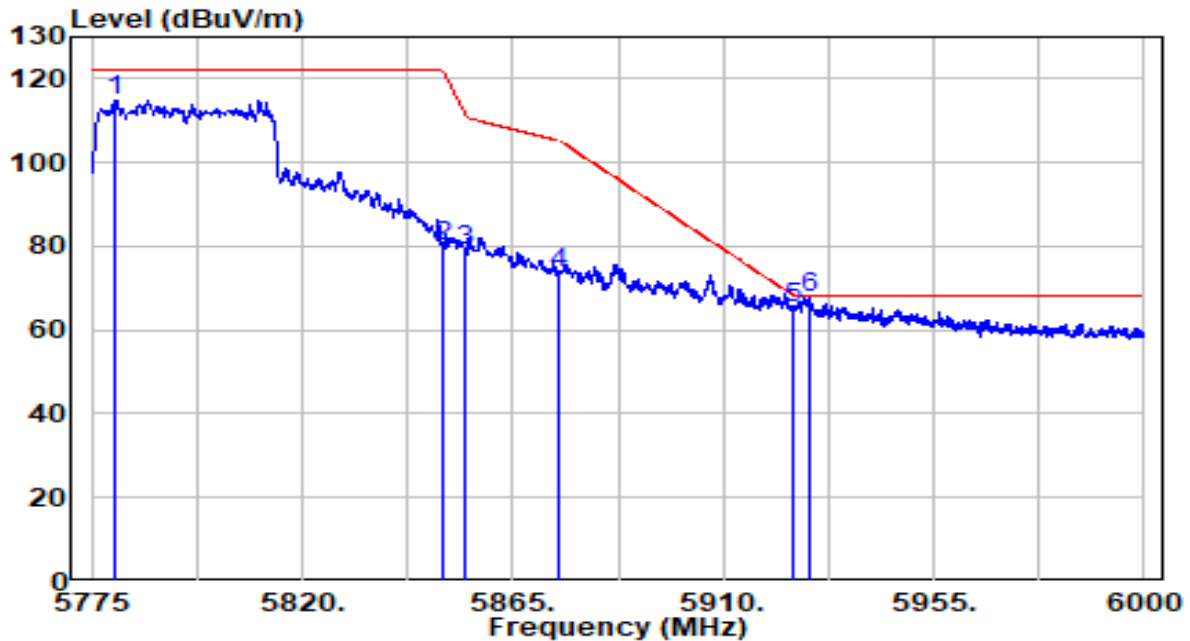


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5780.175	93.74	21.18	114.92	N/A	N/A	Peak
2	5850.000	58.55	21.40	79.95	-42.25	122.20	Peak
3	5855.000	57.65	21.42	79.07	-31.73	110.80	Peak
4	5875.000	52.31	21.49	73.80	-31.40	105.20	Peak
5	5925.000	43.49	21.65	65.14	-3.06	68.20	Peak
6	* 5928.675	46.00	21.66	67.66	-0.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

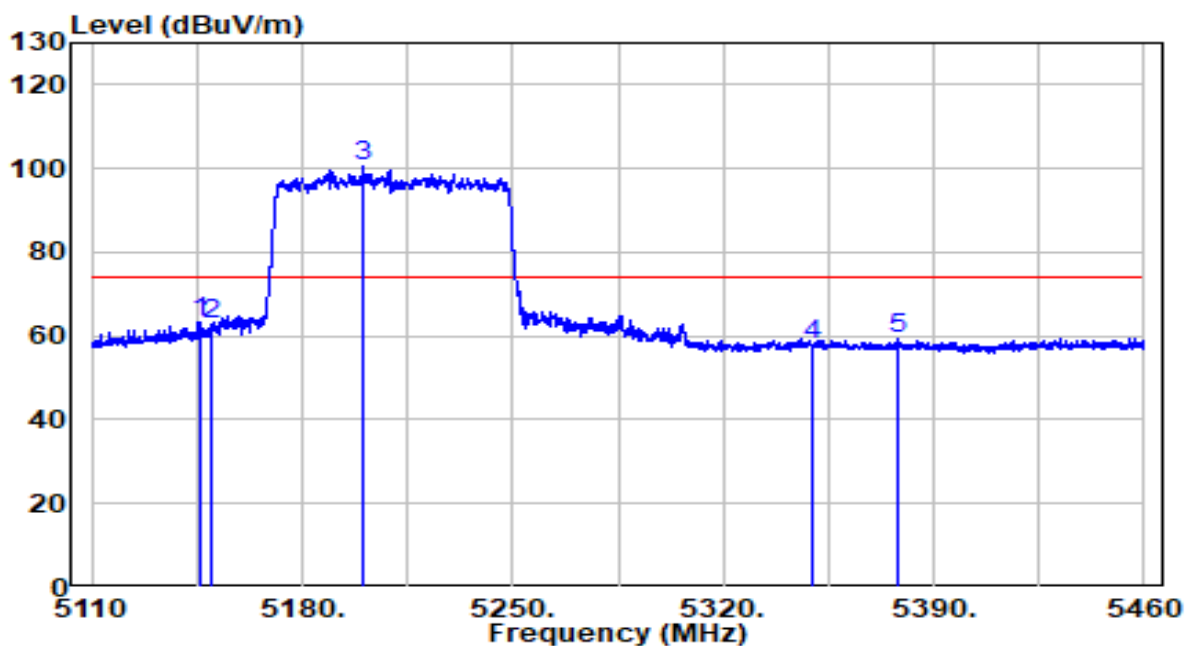


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.875	43.62	19.90	63.52	-10.48	74.00	Peak
2	5150.000	43.02	19.91	62.93	-11.07	74.00	Peak
3	* 5200.300	80.37	19.96	100.33	N/A	N/A	Peak
4	5350.000	37.88	20.11	57.99	-16.01	74.00	Peak
5	5378.275	39.06	20.14	59.20	-14.80	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

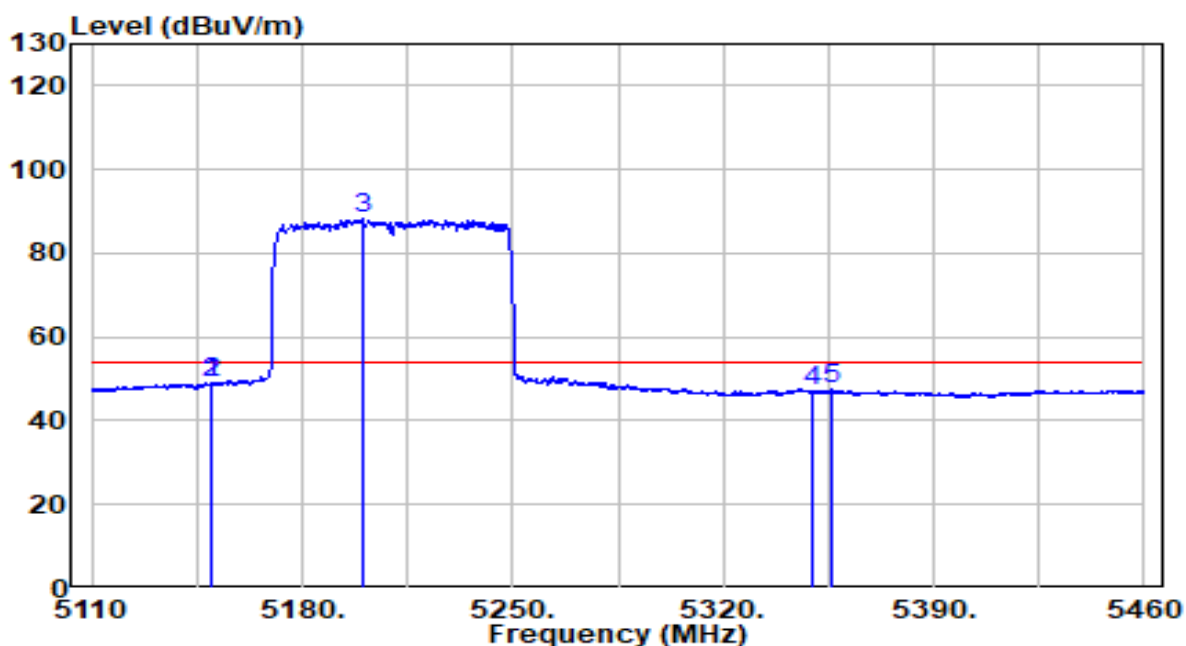


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.725	29.17	19.91	49.07	-4.93	54.00	Average
2	5150.000	29.15	19.91	49.06	-4.94	54.00	Average
3	* 5199.950	68.38	19.96	88.34	N/A	N/A	Average
4	5350.000	26.74	20.11	46.85	-7.15	54.00	Average
5	5356.225	27.29	20.12	47.41	-6.59	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

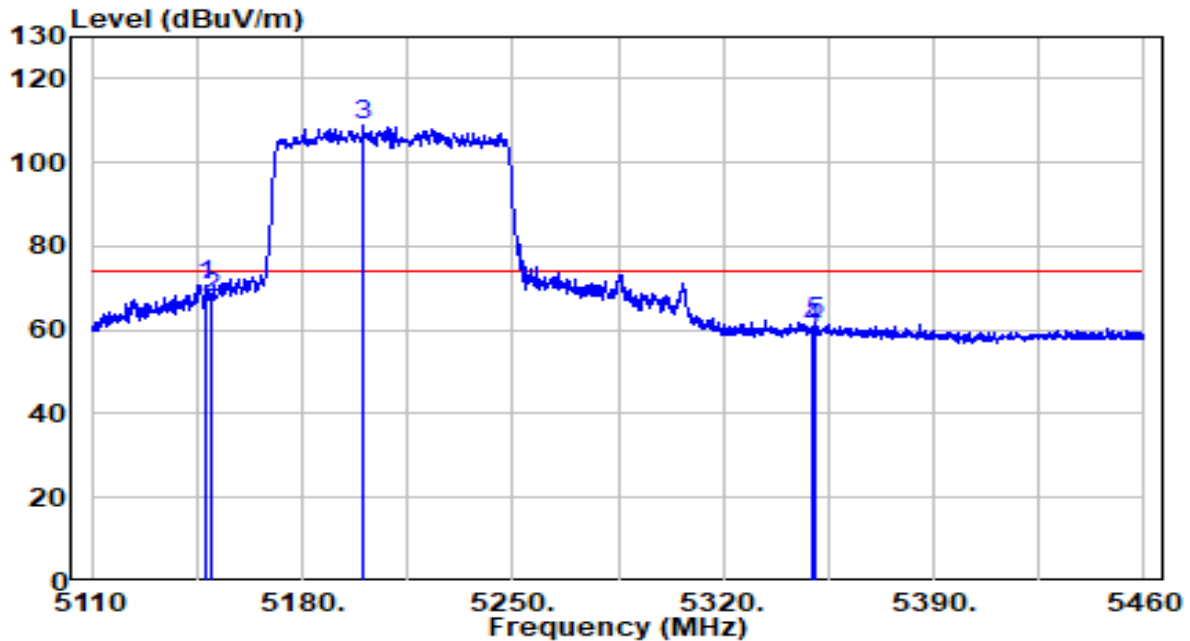


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.325	50.93	19.90	70.83	-3.17	74.00	Peak
2	5150.000	47.55	19.91	67.46	-6.54	74.00	Peak
3	* 5200.300	88.95	19.96	108.91	N/A	N/A	Peak
4	5350.000	40.34	20.11	60.45	-13.55	74.00	Peak
5	5350.975	41.70	20.12	61.81	-12.19	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

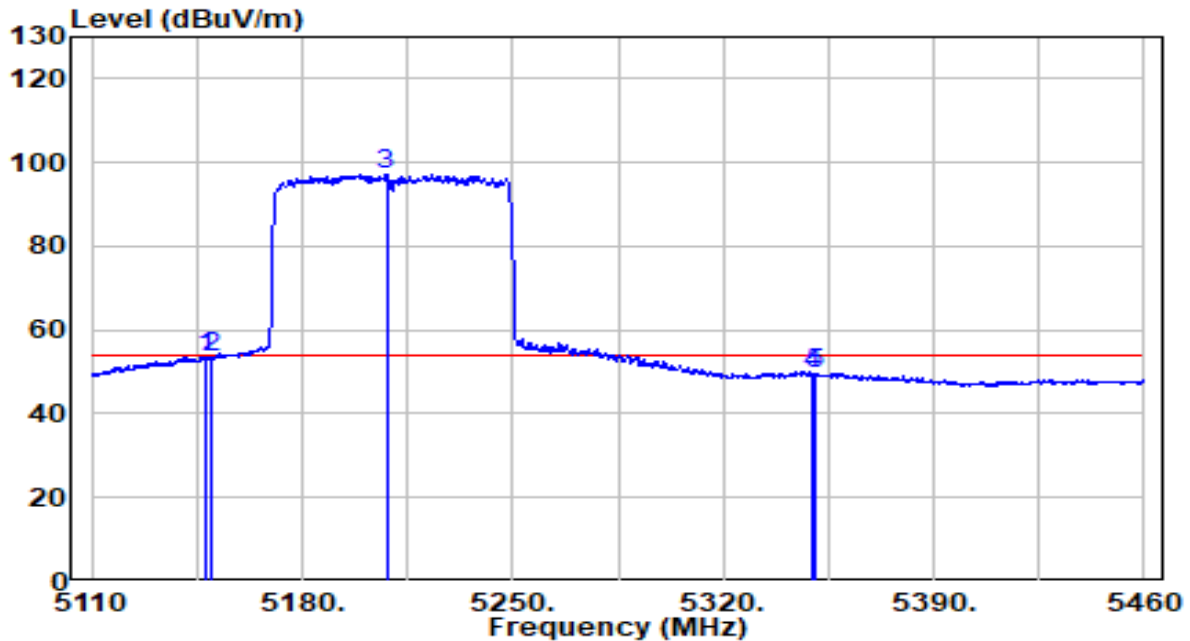


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.150	33.77	19.90	53.68	-0.32	54.00	Average
2	5150.000	33.63	19.91	53.53	-0.47	54.00	Average
3	* 5208.000	77.30	19.97	97.27	N/A	N/A	Average
4	5350.000	29.31	20.11	49.42	-4.58	54.00	Average
5	5350.275	29.67	20.11	49.78	-4.22	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

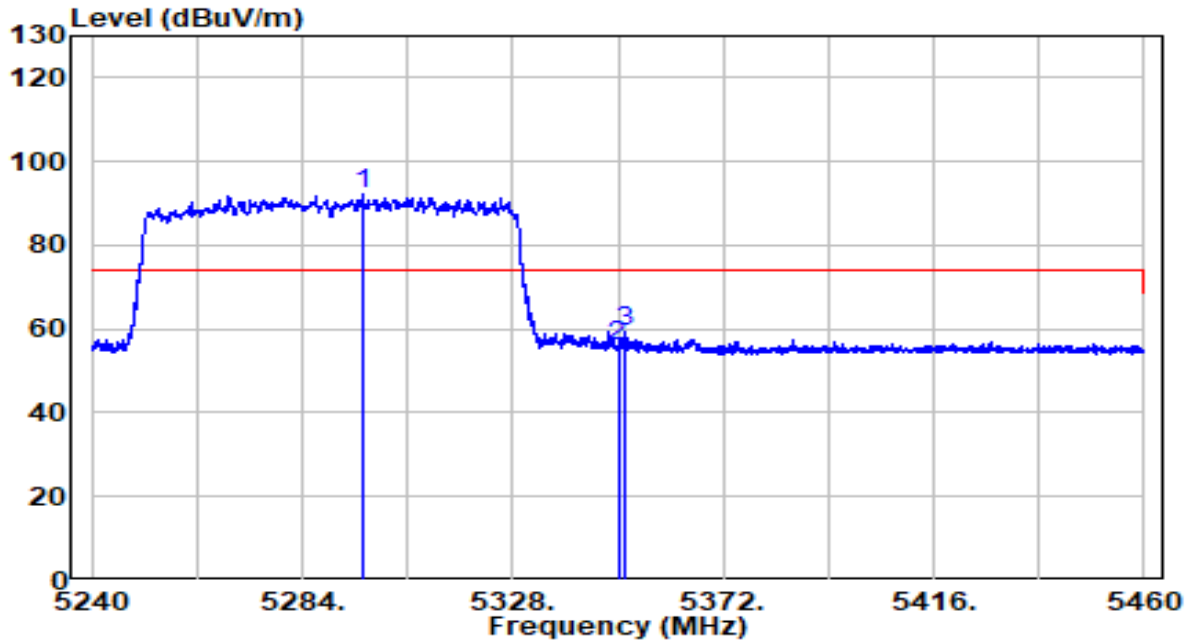


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5296.540	72.07	20.06	92.13	N/A	N/A	Peak
2		5350.000	35.57	20.11	55.69	-18.31	74.00	Peak
3		5351.210	39.02	20.12	59.14	-14.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

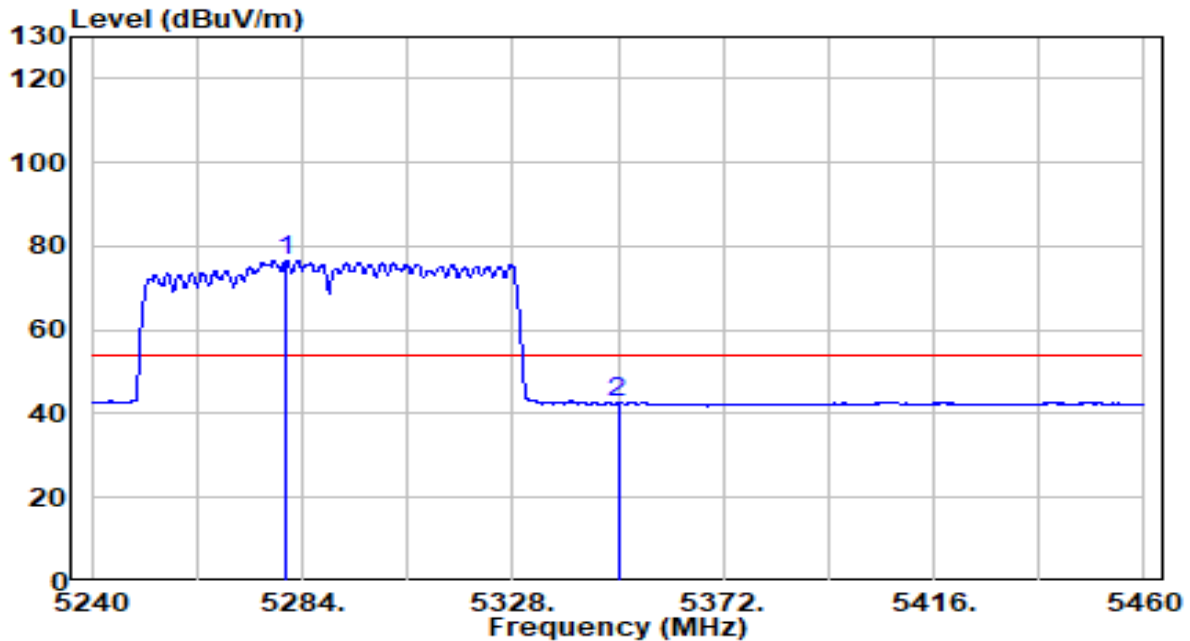


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5280.700	56.60	20.04	76.64	N/A	N/A	Average
2		5350.000	22.50	20.11	42.61	-11.39	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

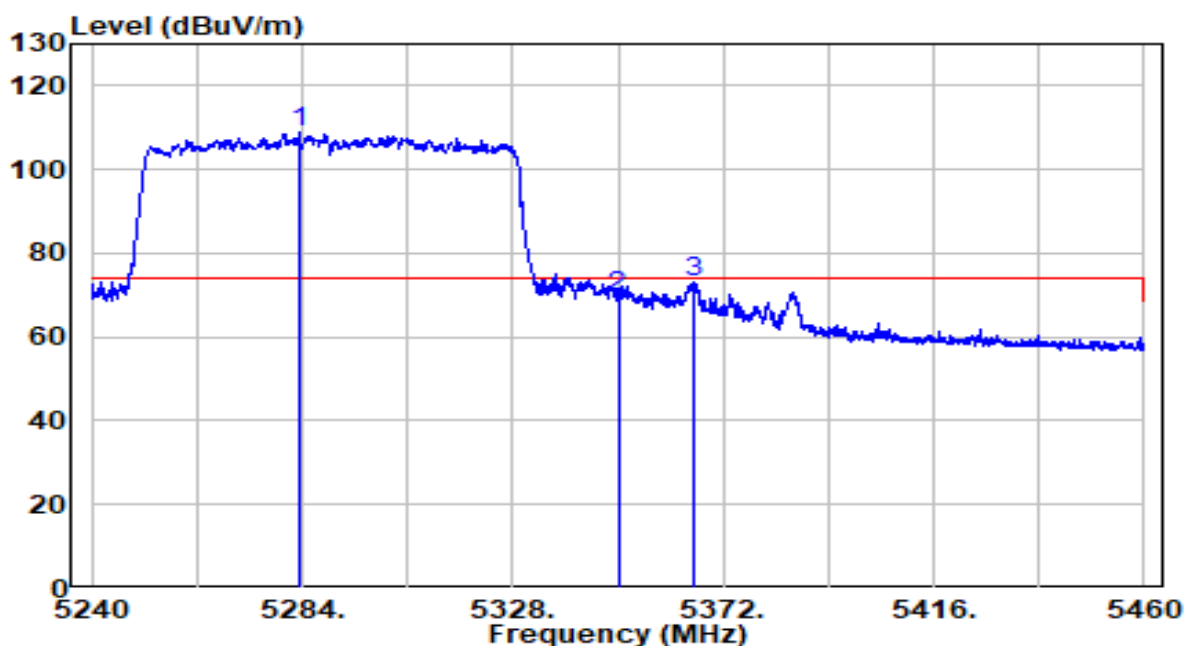


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5283.230	88.77	20.04	108.82	N/A	N/A	Peak
2		5350.000	49.65	20.11	69.76	-4.24	74.00	Peak
3		5365.950	53.07	20.13	73.20	-0.80	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

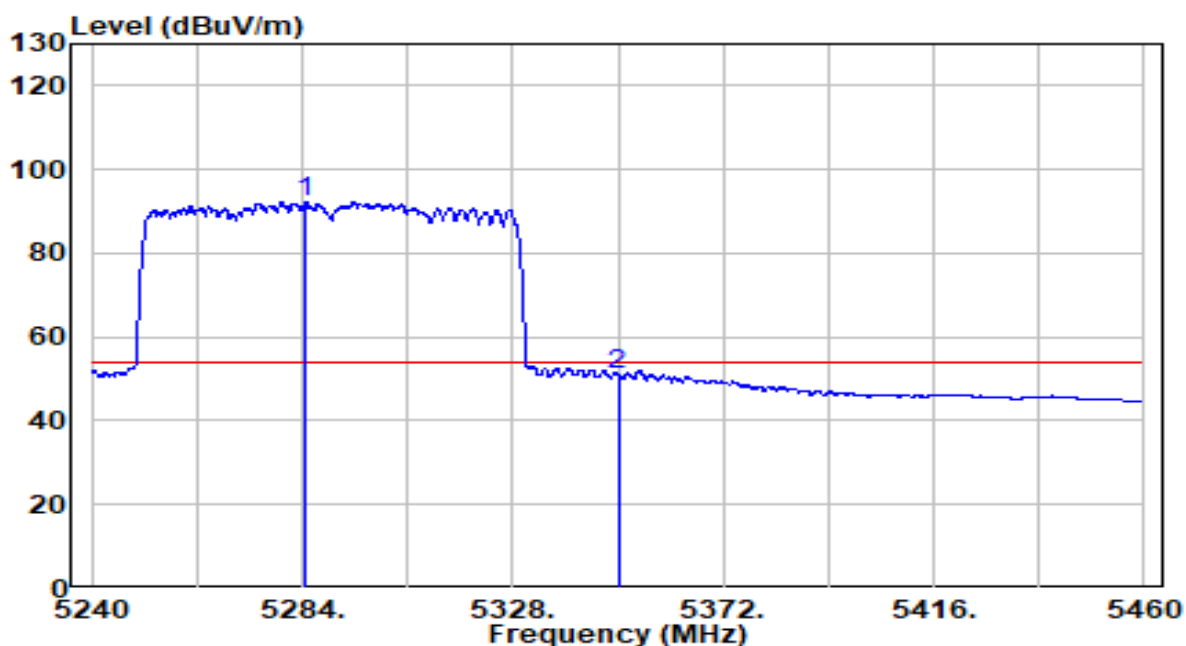


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5284.770	72.31	20.05	92.35	N/A	N/A	Average
2		5350.000	30.86	20.11	50.98	-3.02	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

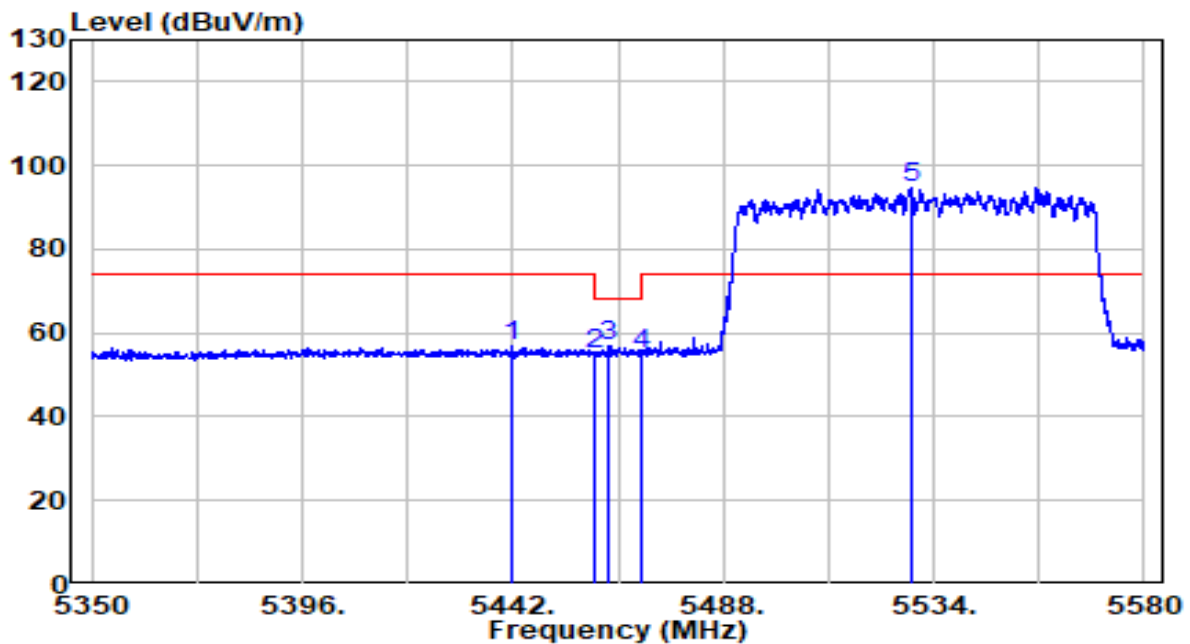


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5442.000	36.50	20.21	56.71	-17.29	74.00	Peak
2	5460.000	34.81	20.23	55.04	-13.16	68.20	Peak
3	5463.160	36.60	20.23	56.83	-11.37	68.20	Peak
4	5470.000	34.65	20.24	54.89	-13.31	68.20	Peak
5	* 5529.055	74.56	20.36	94.92	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

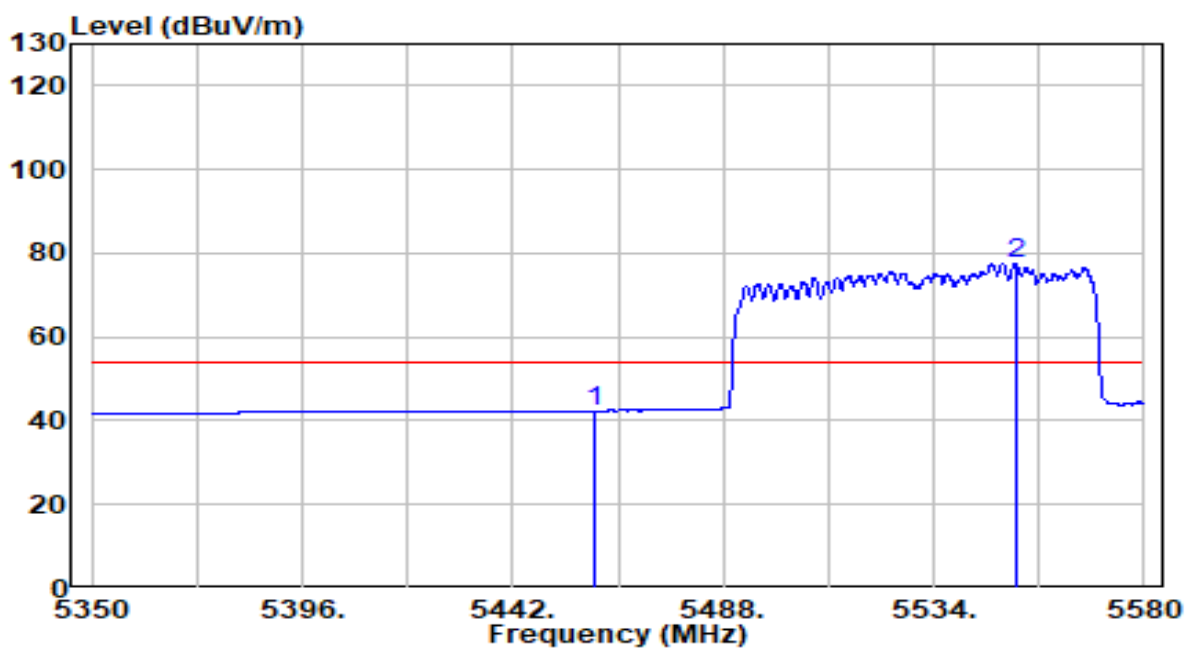


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	22.12	20.23	42.34	-11.66	54.00	Average
2	* 5551.940	57.10	20.44	77.54	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

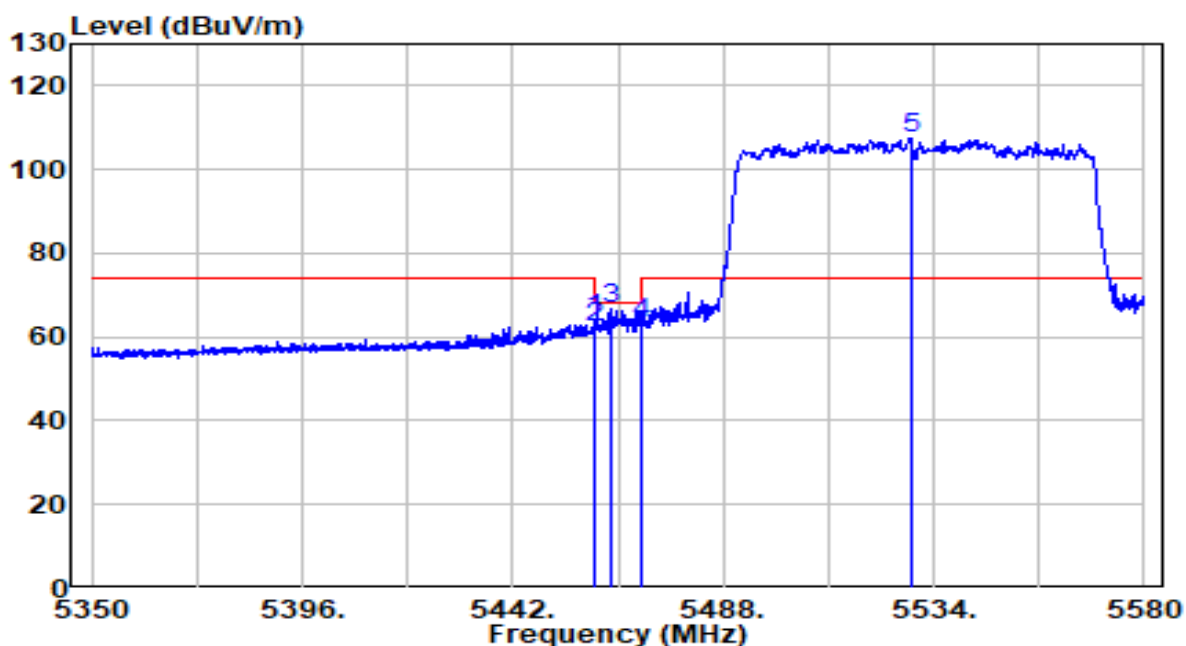


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.710	43.96	20.23	64.19	-9.81	74.00	Peak
2	5460.000	42.00	20.23	62.23	-5.97	68.20	Peak
3	5463.620	46.51	20.23	66.75	-1.45	68.20	Peak
4	5470.000	43.15	20.24	63.38	-4.82	68.20	Peak
5	* 5528.940	87.31	20.36	107.67	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

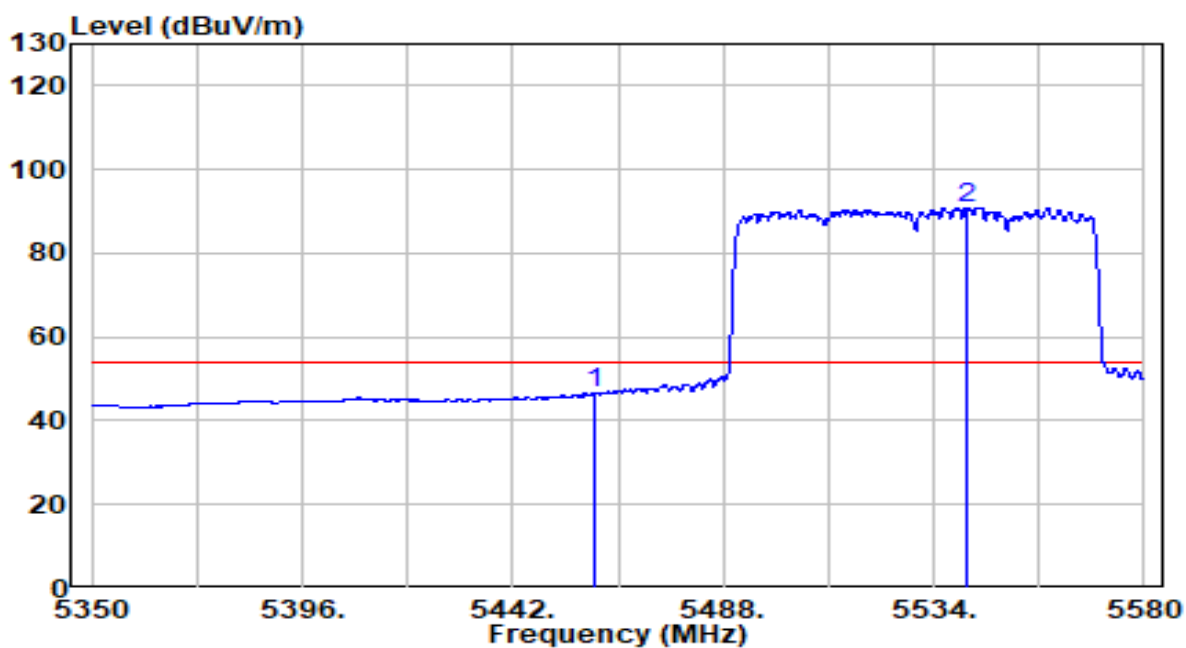


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	26.26	20.23	46.49	-7.51	54.00	Average
2	* 5541.130	70.54	20.40	90.94	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5775MHz - CDD Mode	Test Voltage	110V/60Hz

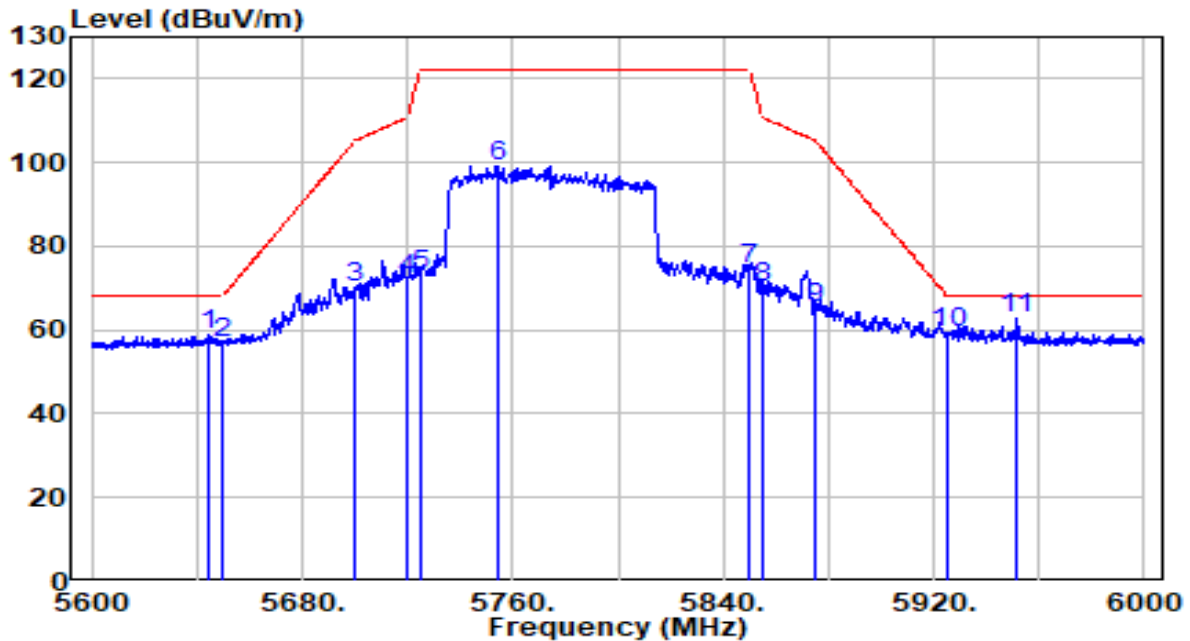


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5644.400	38.03	20.74	58.76	-9.44	68.20	Peak
2	5650.000	35.92	20.76	56.67	-11.53	68.20	Peak
3	5700.000	49.16	20.92	70.08	-35.12	105.20	Peak
4	5720.000	51.25	20.98	72.23	-38.57	110.80	Peak
5	5725.000	51.90	21.00	72.90	-49.30	122.20	Peak
6	5754.200	78.17	21.09	99.26	N/A	N/A	Peak
7	5850.000	53.19	21.40	74.59	-47.61	122.20	Peak
8	5855.000	48.76	21.42	70.18	-40.62	110.80	Peak
9	5875.000	43.78	21.49	65.27	-39.93	105.20	Peak
10	5925.000	37.80	21.65	59.45	-8.75	68.20	Peak
11	* 5951.400	40.82	21.73	62.55	-5.65	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5775MHz - CDD Mode	Test Voltage	110V/60Hz

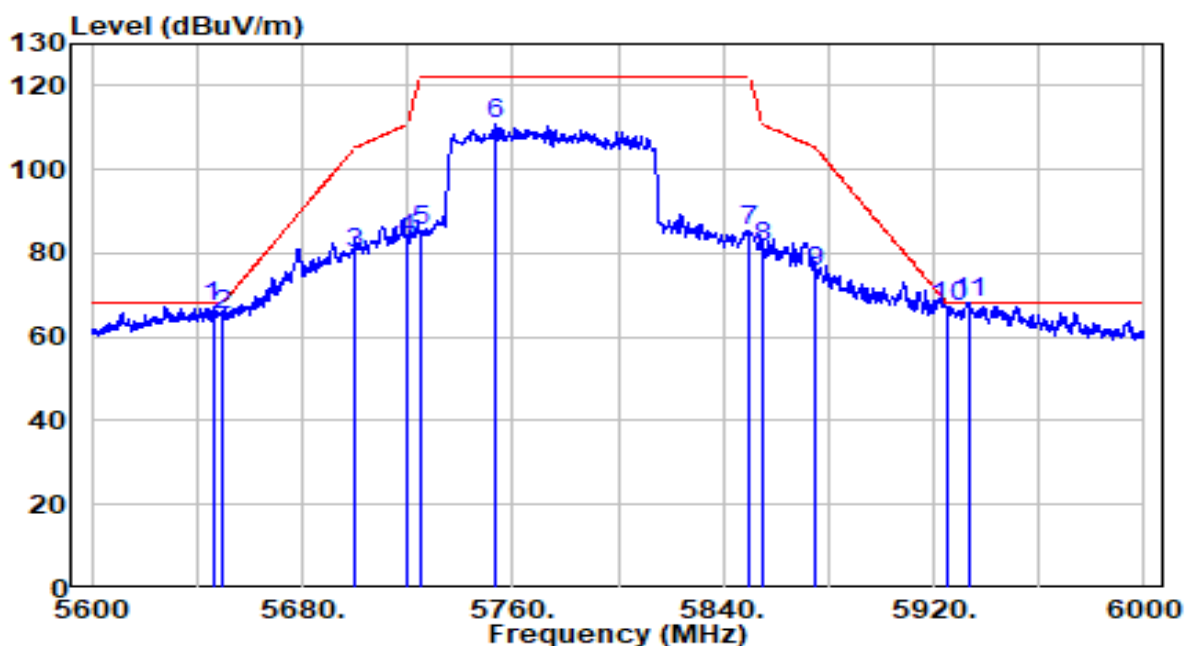


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5646.000	46.31	20.74	67.05	-1.15	68.20	Peak
2	5650.000	44.30	20.76	65.05	-3.15	68.20	Peak
3	5700.000	59.26	20.92	80.18	-25.02	105.20	Peak
4	5720.000	62.47	20.98	83.45	-27.35	110.80	Peak
5	5725.000	64.43	21.00	85.43	-36.77	122.20	Peak
6	5753.600	89.96	21.09	111.05	N/A	N/A	Peak
7	5850.000	63.94	21.40	85.34	-36.86	122.20	Peak
8	5855.000	59.80	21.42	81.22	-29.58	110.80	Peak
9	5875.000	54.09	21.49	75.57	-29.63	105.20	Peak
10	5925.000	45.60	21.65	67.24	-0.96	68.20	Peak
11	* 5933.200	46.42	21.67	68.09	-0.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

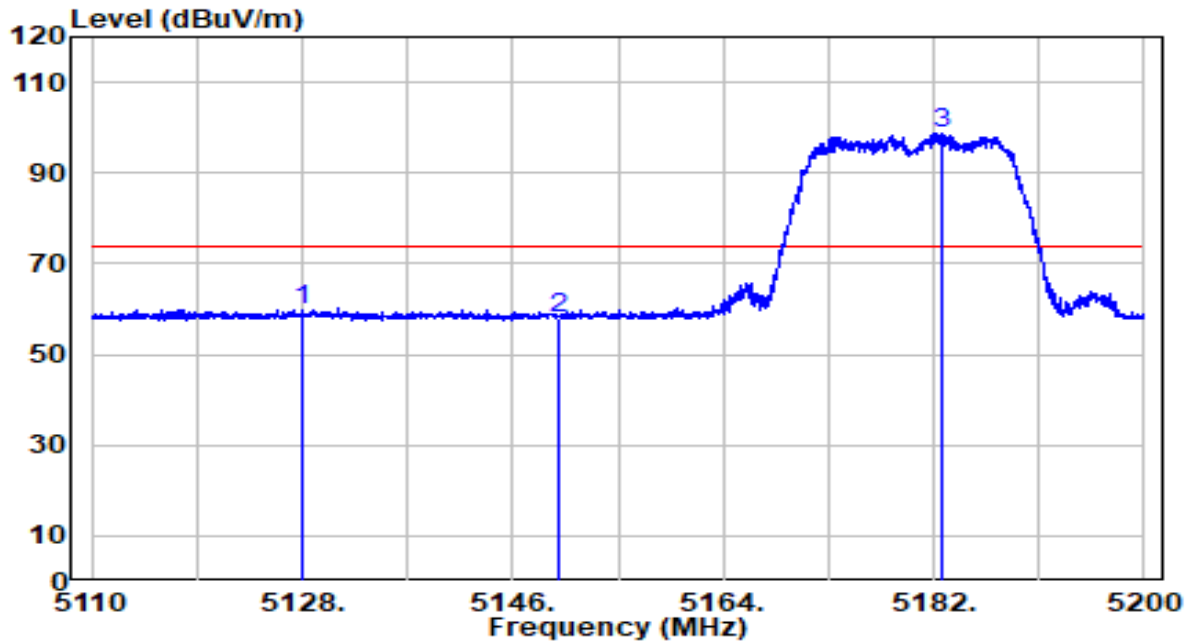


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5128.000	39.70	19.88	59.59	-14.41	74.00	Peak
2	5150.000	38.08	19.91	57.99	-16.01	74.00	Peak
3	* 5182.720	78.89	19.94	98.83	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

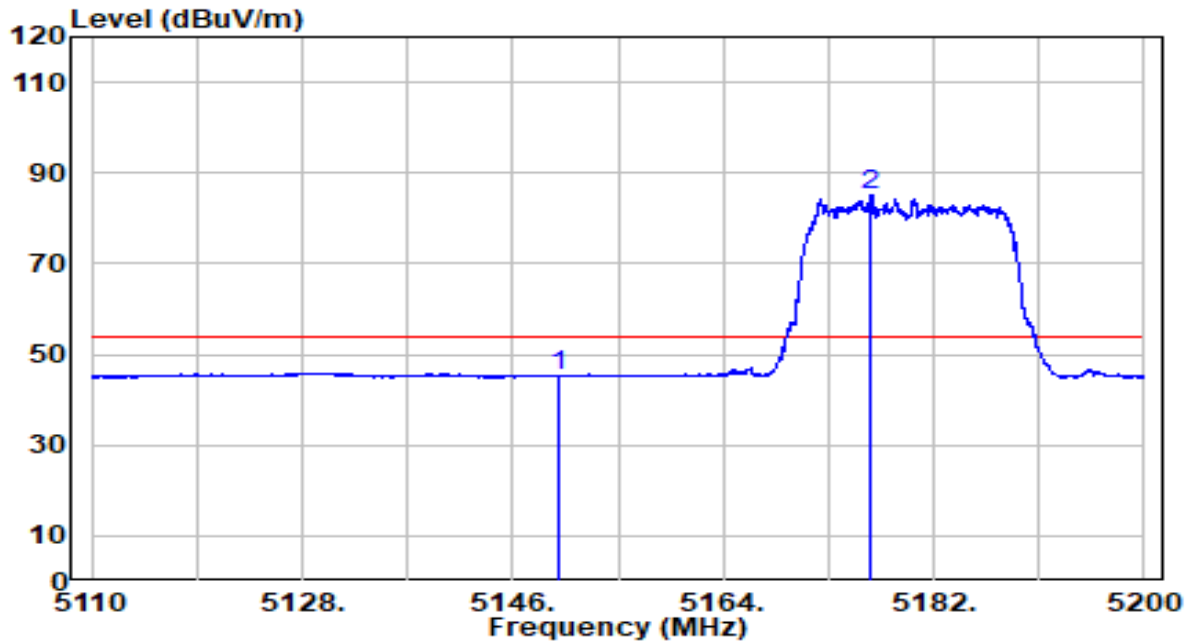


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	25.46	19.91	45.36	-8.64	54.00	Average
2	* 5176.645	65.22	19.93	85.15	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

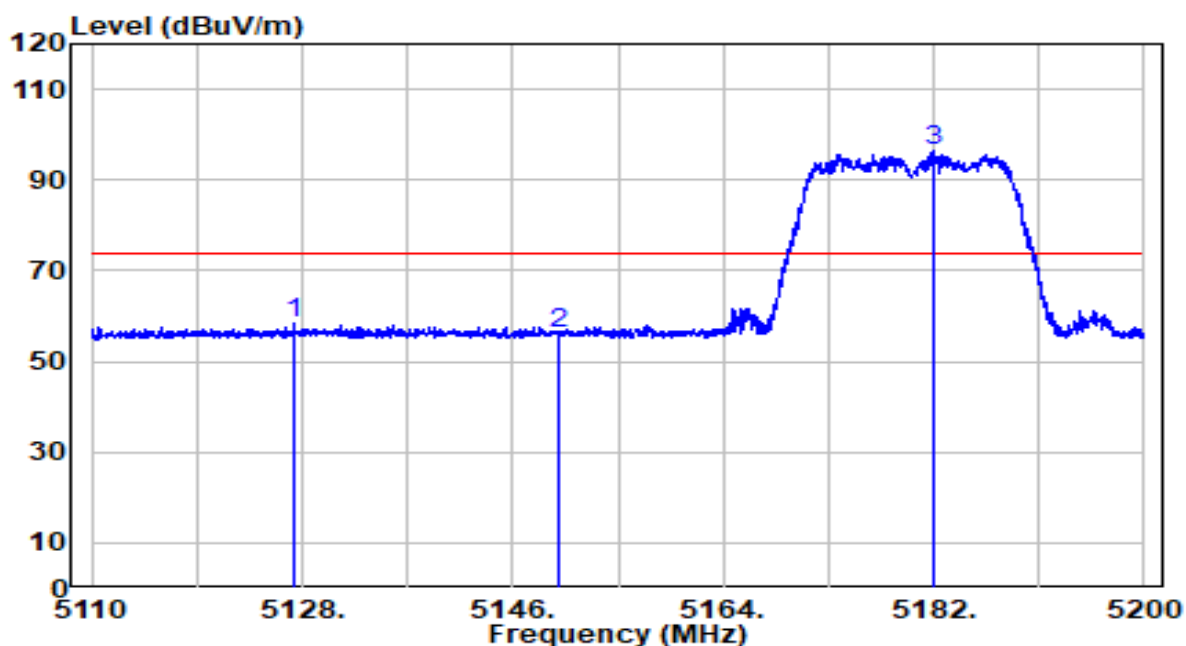


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5127.235	38.38	19.88	58.26	-15.74	74.00	Peak
2	5150.000	36.13	19.91	56.04	-17.96	74.00	Peak
3	* 5182.090	76.45	19.94	96.39	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

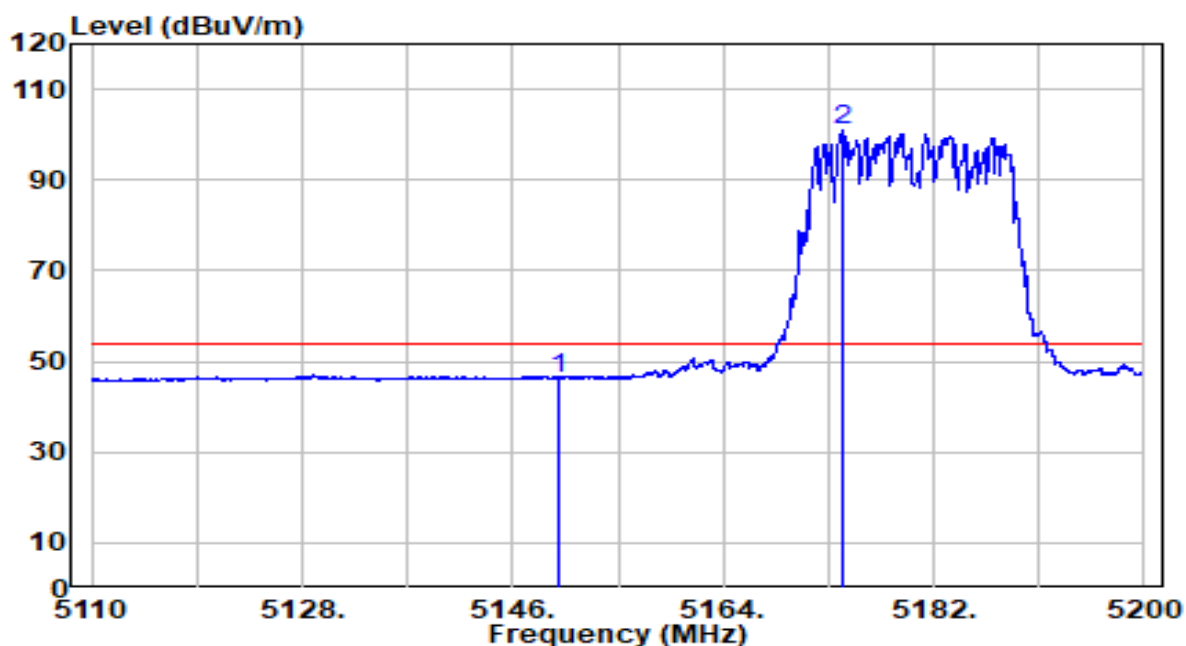


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	26.44	19.91	46.35	-7.65	54.00	Average
2	* 5174.215	81.07	19.93	101.00	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz - Beamforming Mode	Test Voltage	120V/50Hz

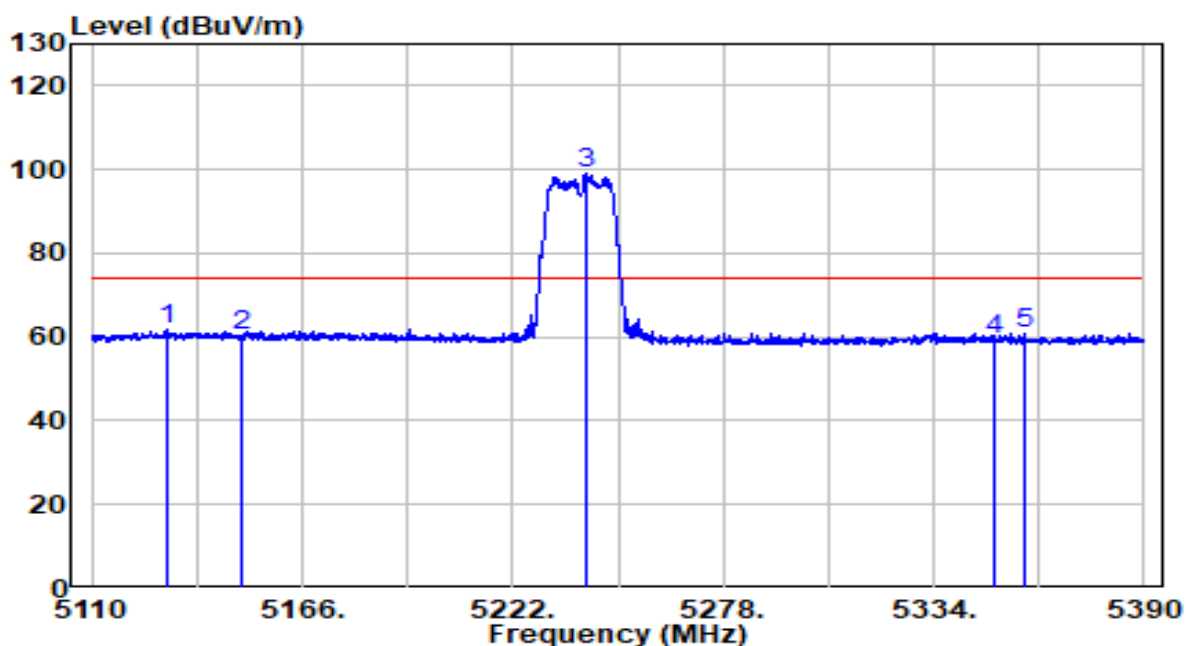


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5130.160	41.99	19.89	61.88	-12.12	74.00	Peak
2	5150.000	40.37	19.91	60.27	-13.73	74.00	Peak
3	* 5241.880	79.14	20.00	99.14	N/A	N/A	Peak
4	5350.000	39.04	20.11	59.16	-14.84	74.00	Peak
5	5358.500	40.60	20.12	60.73	-13.27	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz - Beamforming Mode	Test Voltage	120V/50Hz

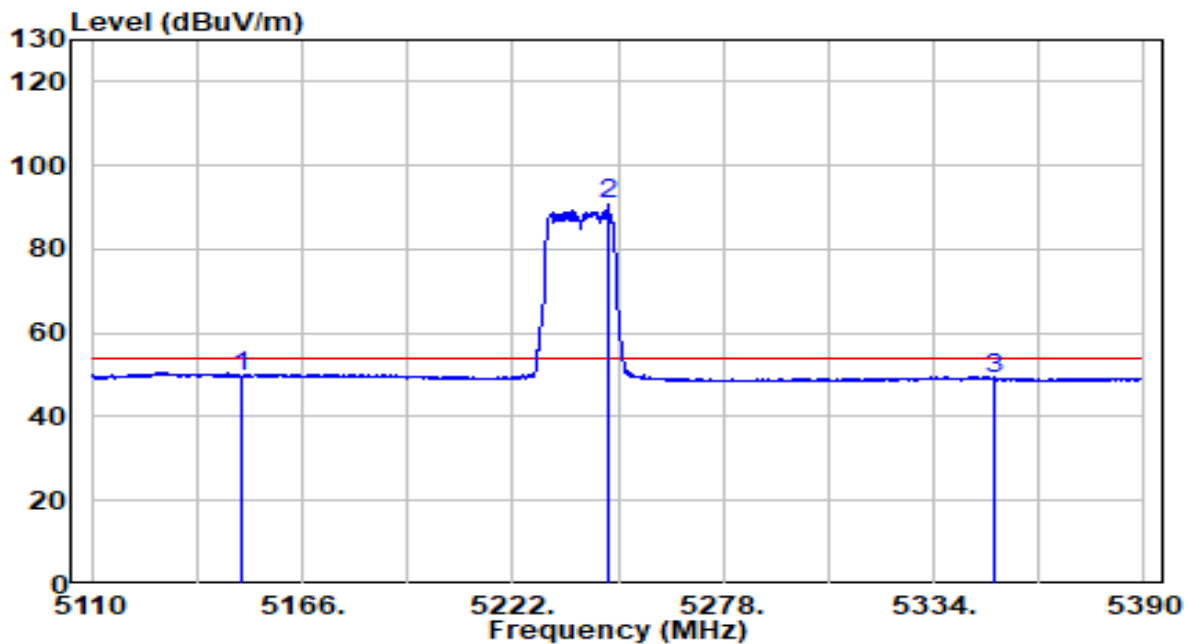


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.83	19.91	49.73	-4.27	54.00	Average
2	* 5247.620	70.66	20.01	90.67	N/A	N/A	Average
3	5350.000	28.76	20.11	48.87	-5.13	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz - Beamforming Mode	Test Voltage	120V/50Hz

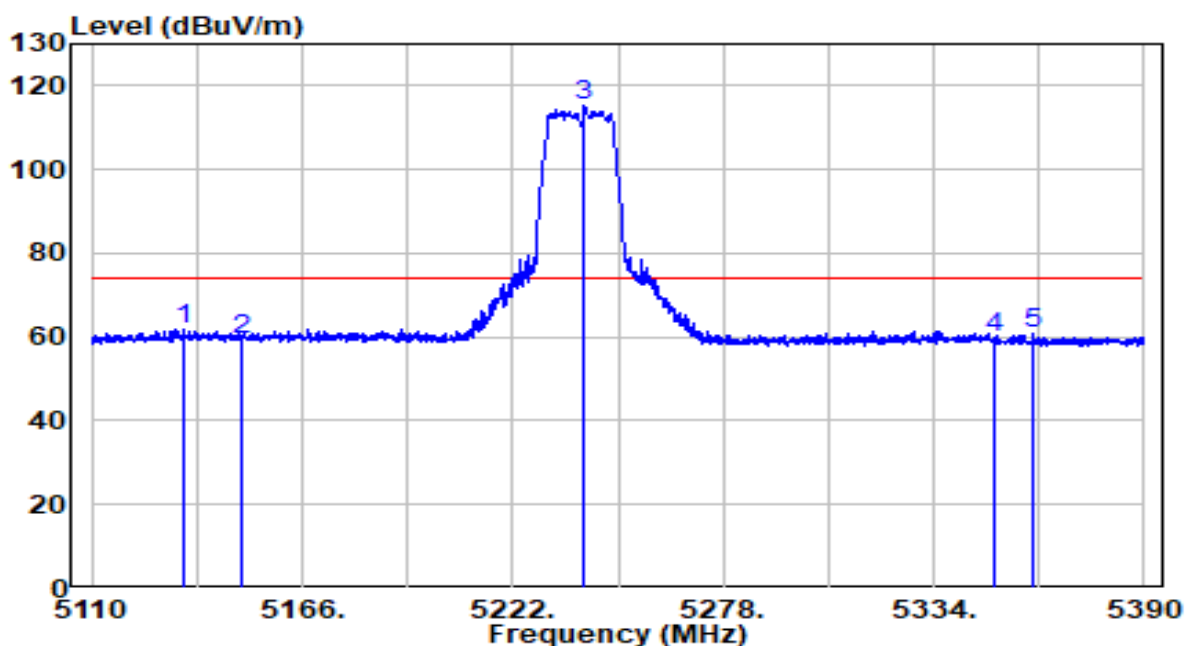


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5134.220	41.95	19.89	61.84	-12.16	74.00	Peak
2	5150.000	39.65	19.91	59.56	-14.44	74.00	Peak
3	* 5241.180	95.05	20.00	115.05	N/A	N/A	Peak
4	5350.000	39.61	20.11	59.72	-14.28	74.00	Peak
5	5360.600	40.56	20.13	60.68	-13.32	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz - Beamforming Mode	Test Voltage	120V/50Hz

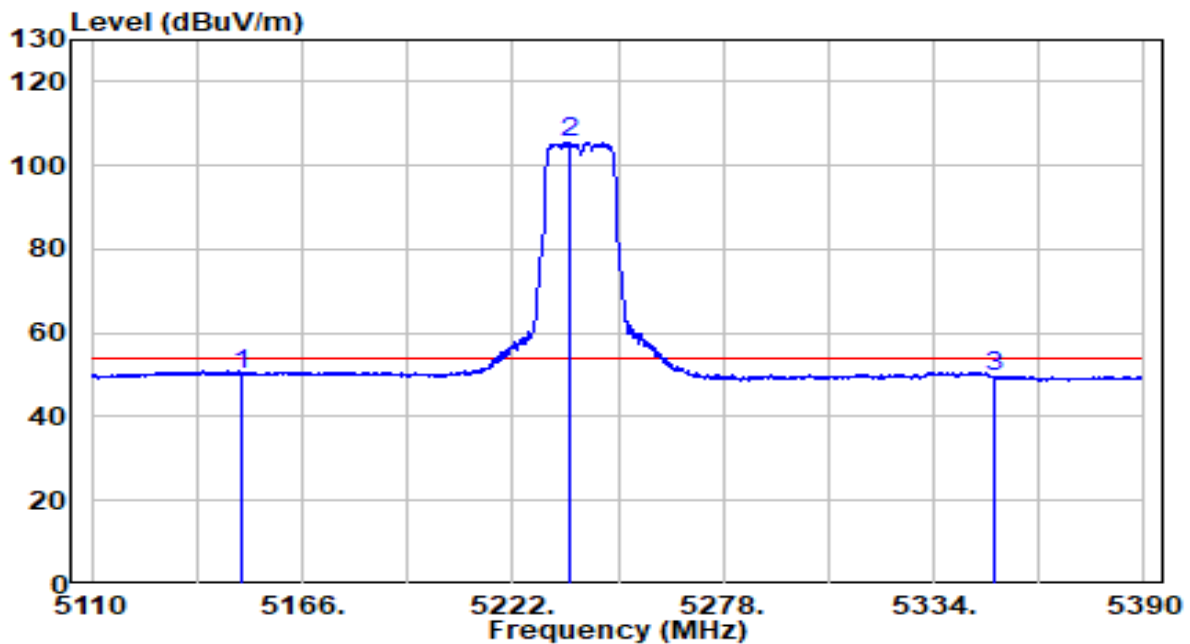


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	30.12	19.91	50.03	-3.97	54.00	Average
2	* 5236.840	85.55	20.00	105.54	N/A	N/A	Average
3	5350.000	29.41	20.11	49.52	-4.48	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz - Beamforming mode	Test Voltage	110V/60Hz

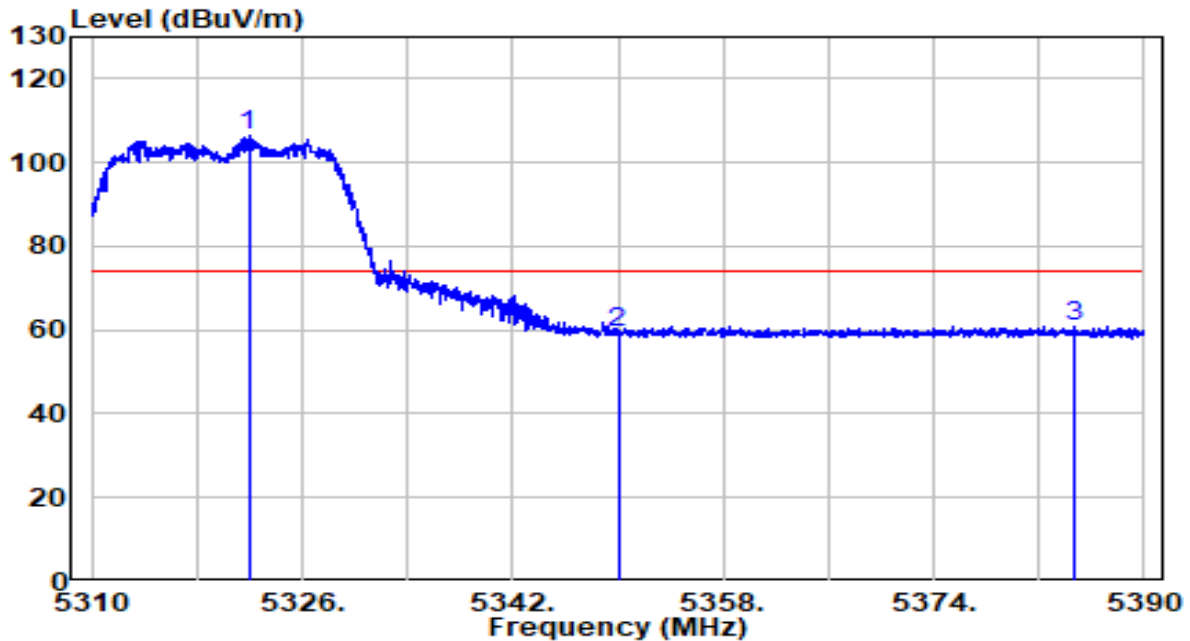


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5321.920	86.29	20.08	106.37	N/A	N/A	Peak
2		5350.000	39.43	20.11	59.54	-14.46	74.00	Peak
3		5384.680	40.67	20.15	60.82	-13.18	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz - Beamforming mode	Test Voltage	110V/60Hz

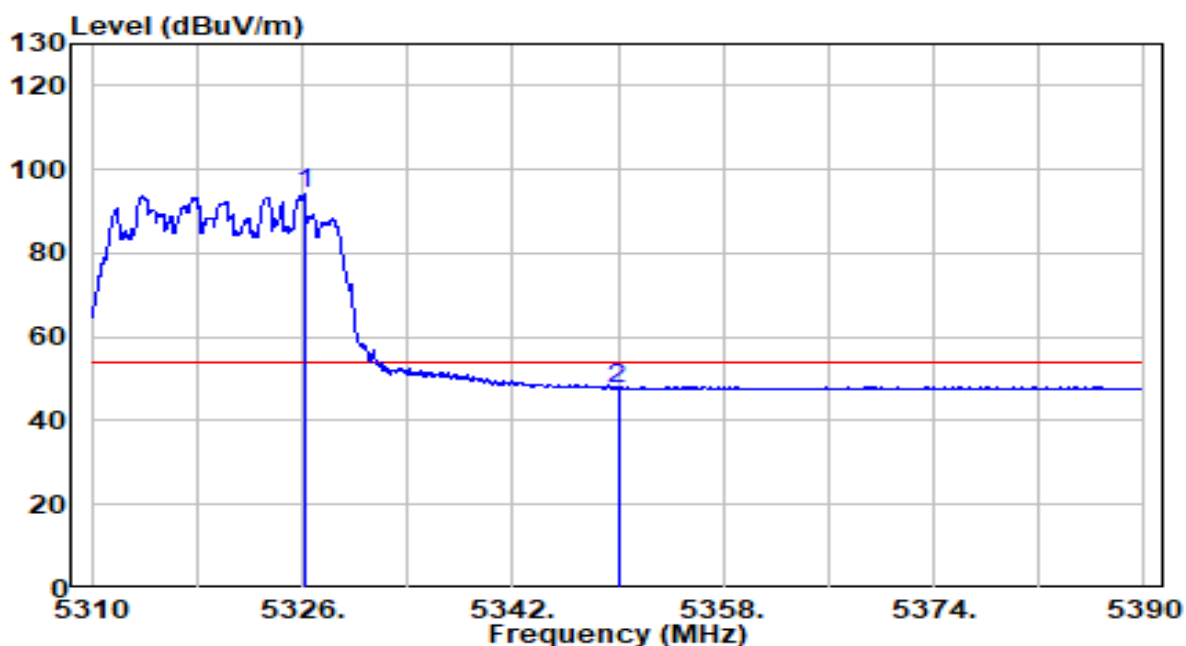


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5326.160	74.10	20.09	94.19	N/A	N/A	Average
2		5350.000	27.70	20.11	47.81	-6.19	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz - Beamforming mode	Test Voltage	110V/60Hz

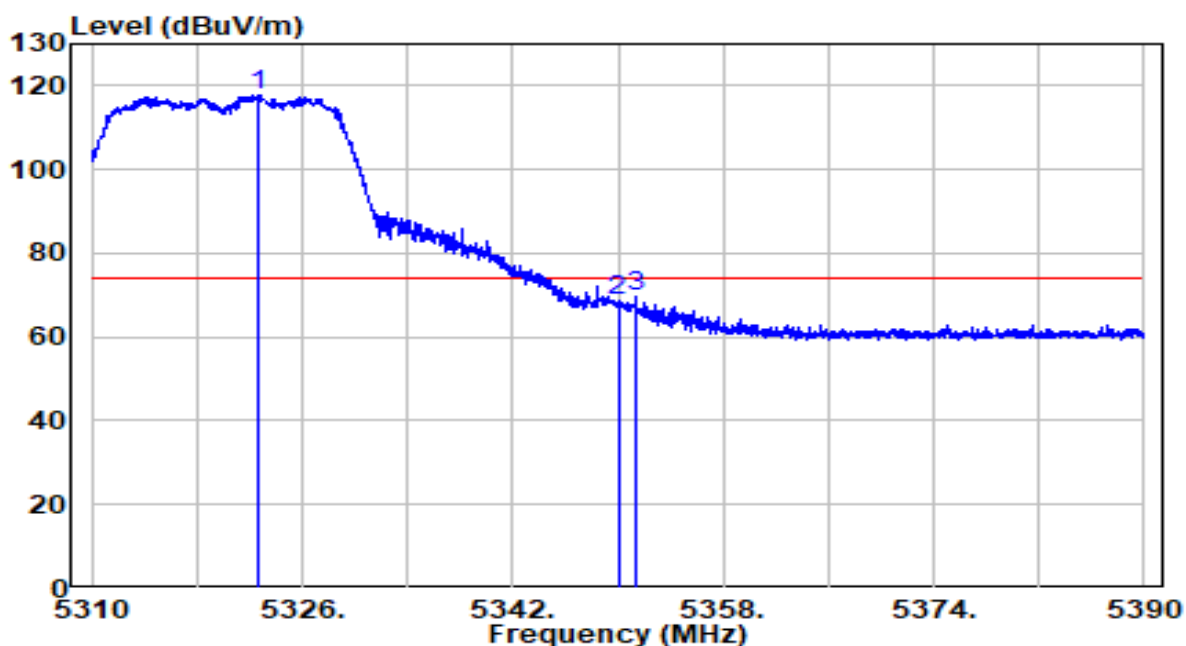


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5322.600	97.64	20.09	117.73	N/A	N/A	Peak
2		5350.000	48.71	20.11	68.82	-5.18	74.00	Peak
3		5351.400	49.70	20.12	69.81	-4.19	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz - Beamforming mode	Test Voltage	110V/60Hz

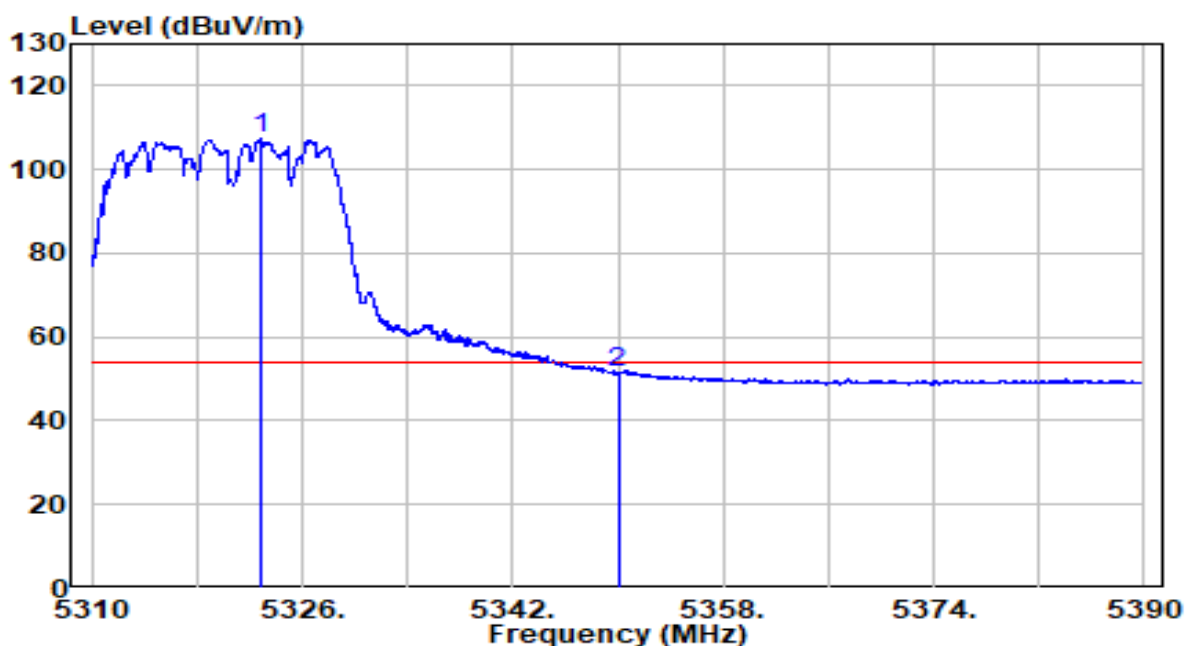


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5322.840	87.18	20.09	107.27	N/A	N/A	Average
2		5350.000	31.43	20.11	51.54	-2.46	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz - Beamforming mode	Test Voltage	110V/60Hz

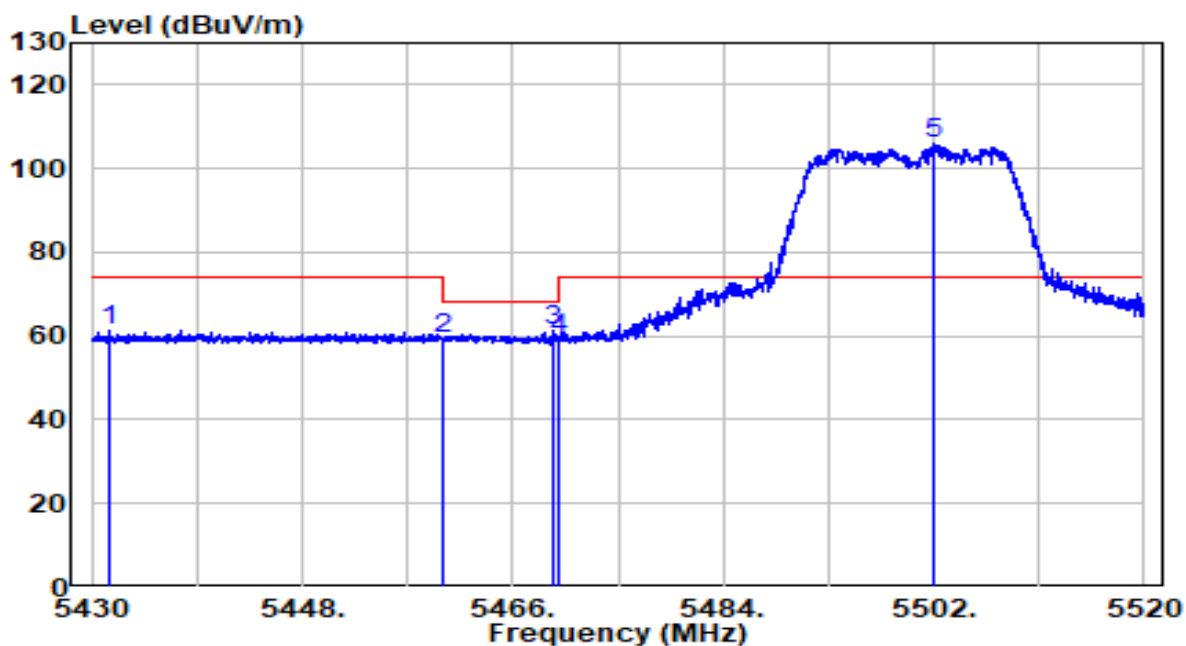


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5431.530	41.14	20.20	61.34	-12.66	74.00	Peak
2	5460.000	38.98	20.23	59.21	-8.99	68.20	Peak
3	5469.420	40.89	20.24	61.12	-7.08	68.20	Peak
4	5470.000	39.04	20.24	59.28	-8.92	68.20	Peak
5	* 5501.910	85.45	20.28	105.73	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz - Beamforming mode	Test Voltage	110V/60Hz

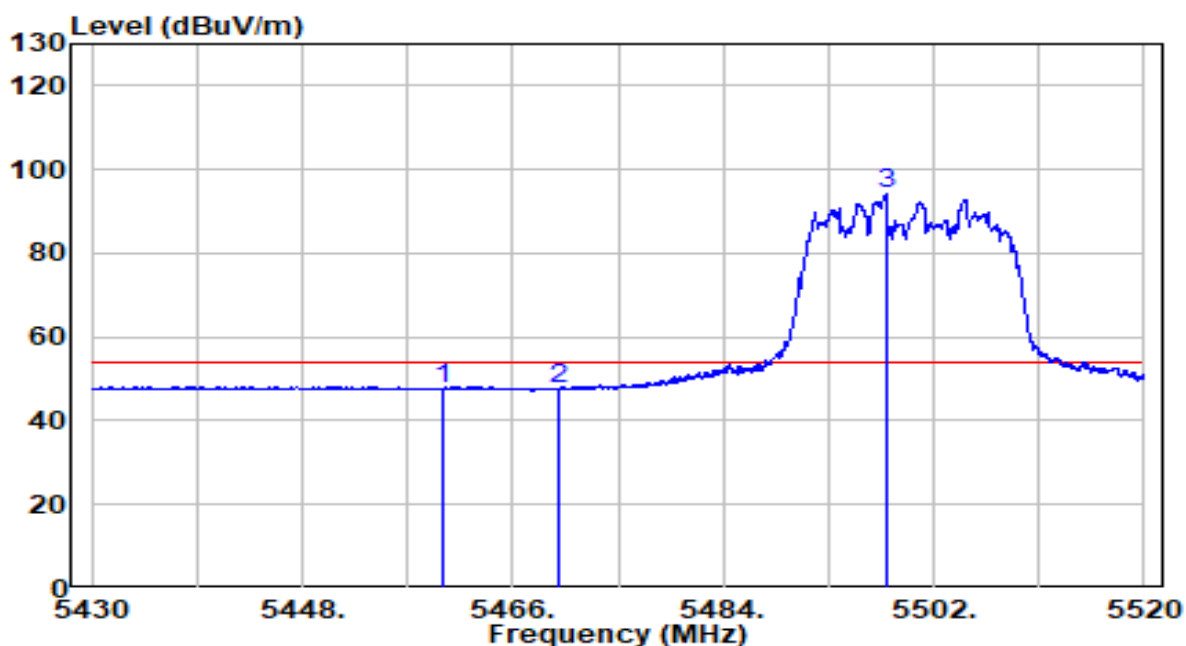


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.46	20.23	47.69	-6.31	54.00	Average
2	5470.000	27.39	20.24	47.63	-6.37	54.00	Average
3	* 5498.040	73.87	20.27	94.14	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz - Beamforming mode	Test Voltage	110V/60Hz

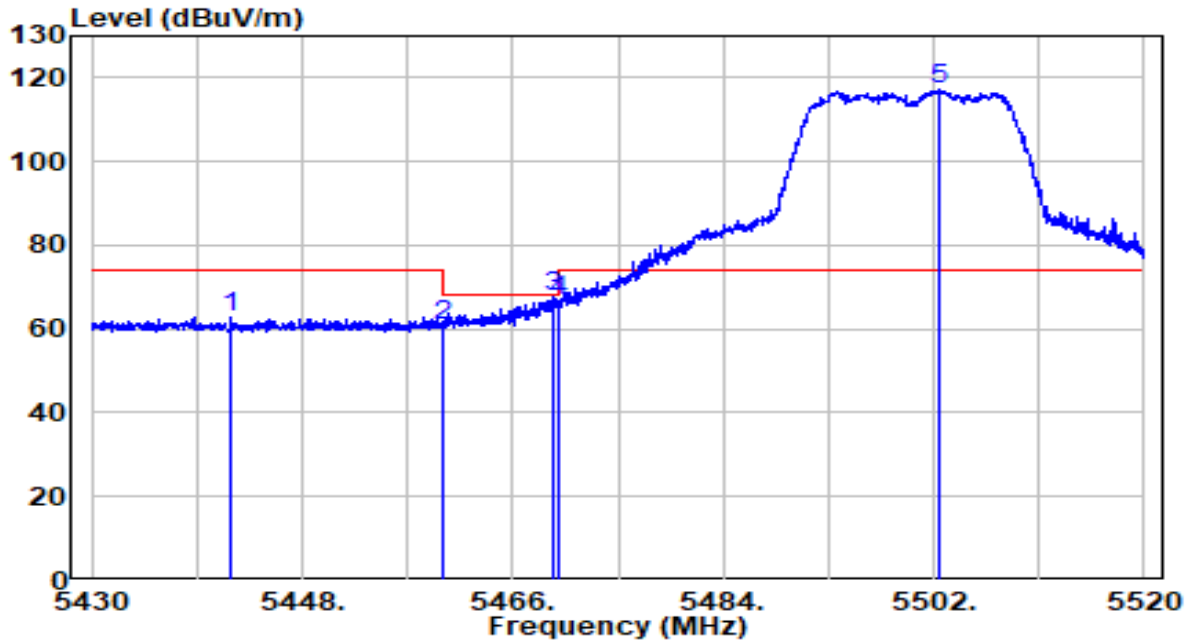


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5441.970	42.53	20.21	62.74	-11.26	74.00	Peak
2	5460.000	40.80	20.23	61.02	-7.18	68.20	Peak
3	5469.465	47.35	20.24	67.59	-0.61	68.20	Peak
4	5470.000	46.49	20.24	66.73	-1.47	68.20	Peak
5	* 5502.540	96.80	20.28	117.08	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz - Beamforming mode	Test Voltage	110V/60Hz

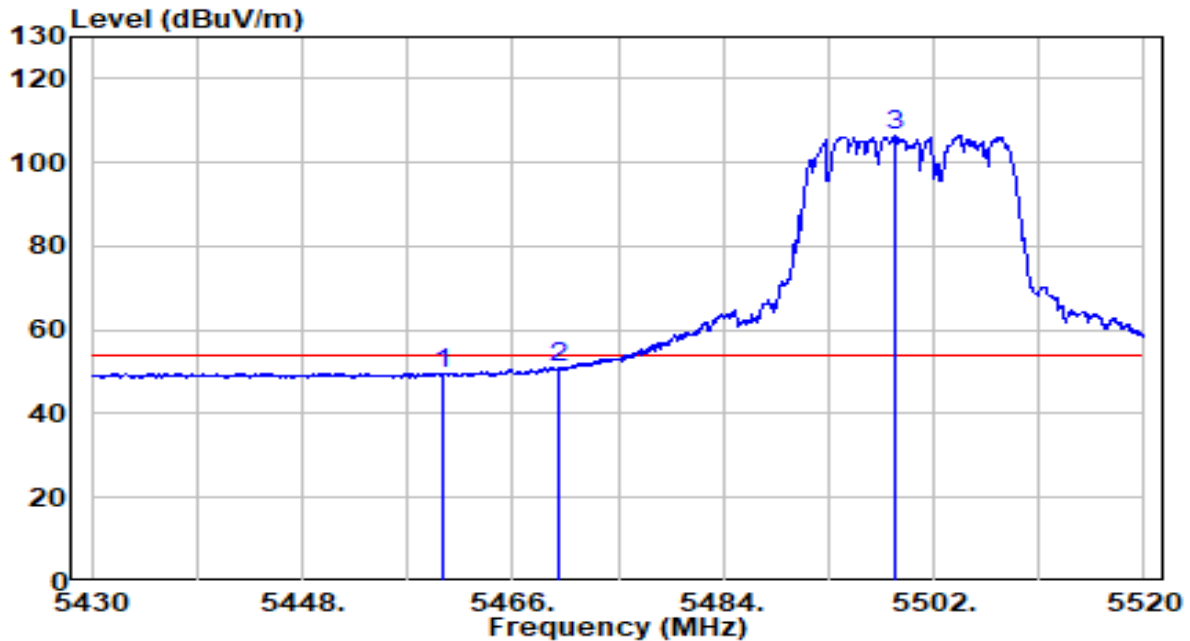


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.35	20.23	49.58	-4.42	54.00	Average
2	5470.000	30.86	20.24	51.10	-2.90	54.00	Average
3	* 5498.715	86.26	20.27	106.53	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz - Beamforming mode	Test Voltage	110V/60Hz

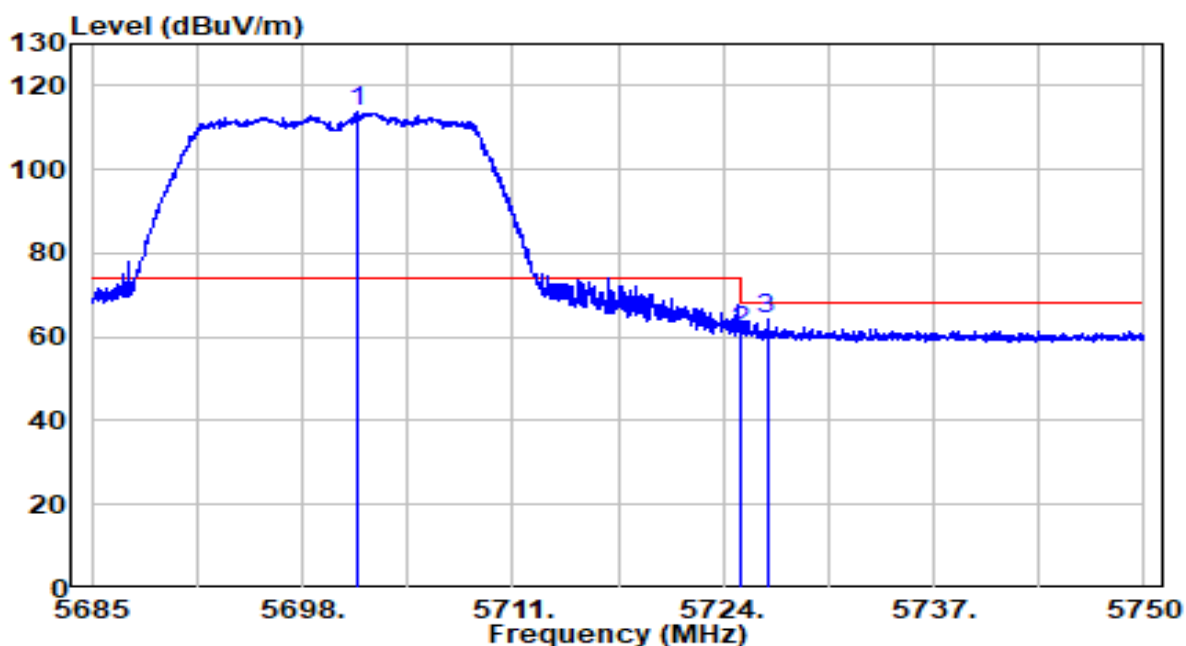


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5701.348	92.65	20.92	113.57	N/A	N/A	Peak
2		5725.000	40.26	21.00	61.26	-6.94	68.20	Peak
3		5726.697	43.18	21.00	64.18	-4.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz - Beamforming mode	Test Voltage	110V/60Hz

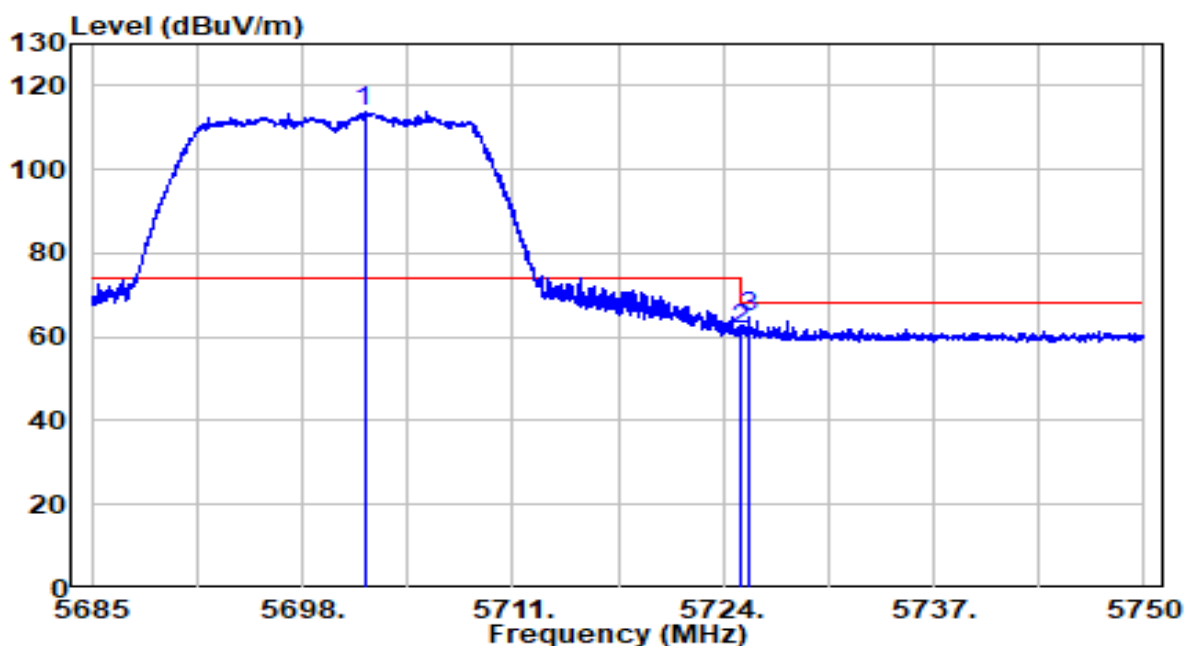


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5701.835	92.82	20.92	113.74	N/A	N/A	Peak
2		5725.000	40.88	21.00	61.88	-6.32	68.20	Peak
3		5725.625	43.86	21.00	64.86	-3.34	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz - Beamforming Mode	Test Voltage	110V/60Hz

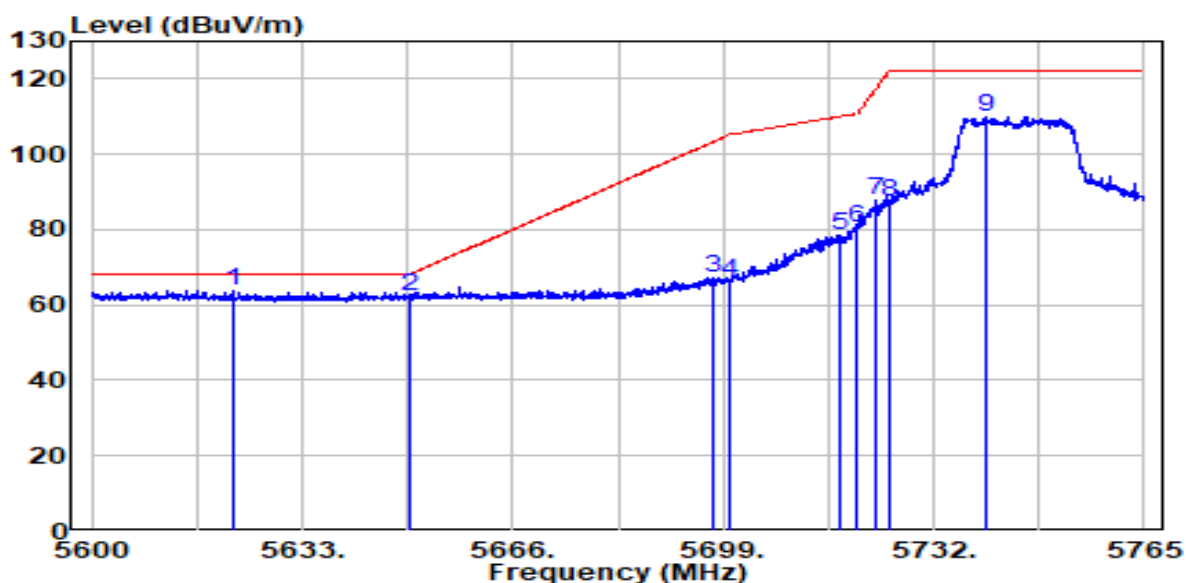


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5622.027	43.09	20.67	63.76	-4.44	68.20	Peak
2		5649.995	41.79	20.76	62.55	-5.65	68.20	Peak
3		5697.515	46.33	20.91	67.24	-36.13	103.37	Peak
4		5700.000	45.46	20.92	66.38	-38.82	105.20	Peak
5		5717.480	57.58	20.97	78.55	-31.54	110.10	Peak
6		5720.000	59.59	20.98	80.58	-30.22	110.80	Peak
7		5723.090	66.77	20.99	87.76	-30.08	117.85	Peak
8		5725.000	66.26	21.00	87.26	-34.94	122.20	Peak
9		5740.333	88.80	21.05	109.85	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz - Beamforming Mode	Test Voltage	110V/60Hz

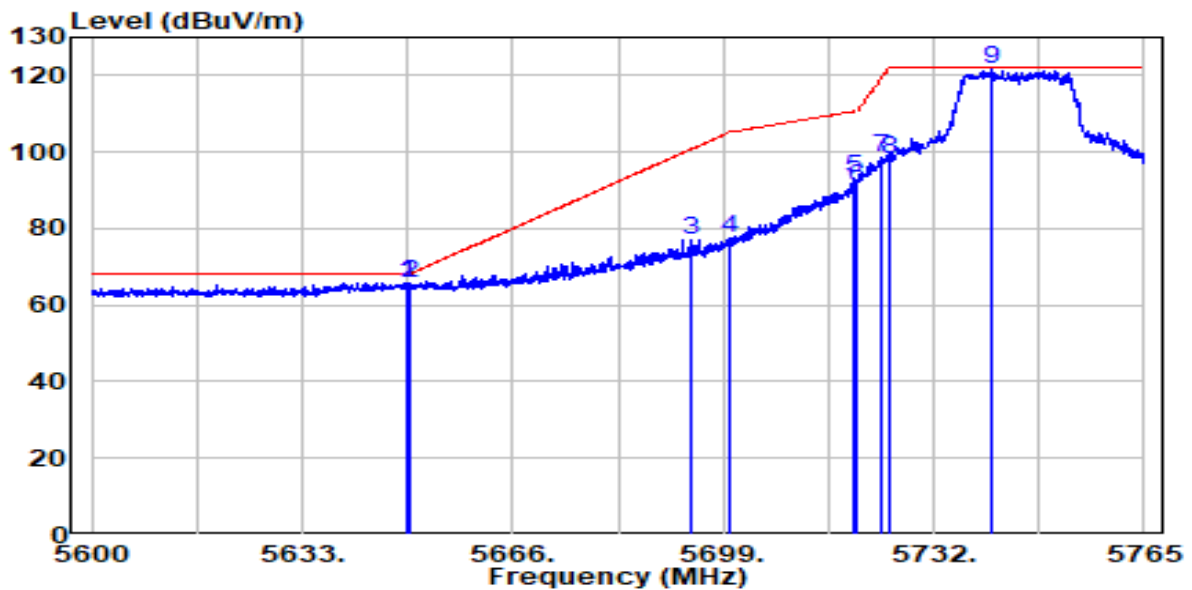


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5649.500	45.16	20.75	65.91	-2.29	68.20	Peak
2	5649.995	44.80	20.76	65.56	-2.64	68.20	Peak
3	5693.803	56.05	20.90	76.94	-23.69	100.63	Peak
4	5700.000	56.37	20.92	77.29	-27.91	105.20	Peak
5	5719.625	72.02	20.98	93.00	-17.70	110.70	Peak
6	5720.000	69.86	20.98	90.84	-19.96	110.80	Peak
7	5723.833	77.84	21.00	98.84	-20.70	119.54	Peak
8	5725.000	77.28	21.00	98.28	-23.92	122.20	Peak
9	* 5741.240	100.47	21.05	121.52	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz - Beamforming Mode	Test Voltage	110V/60Hz

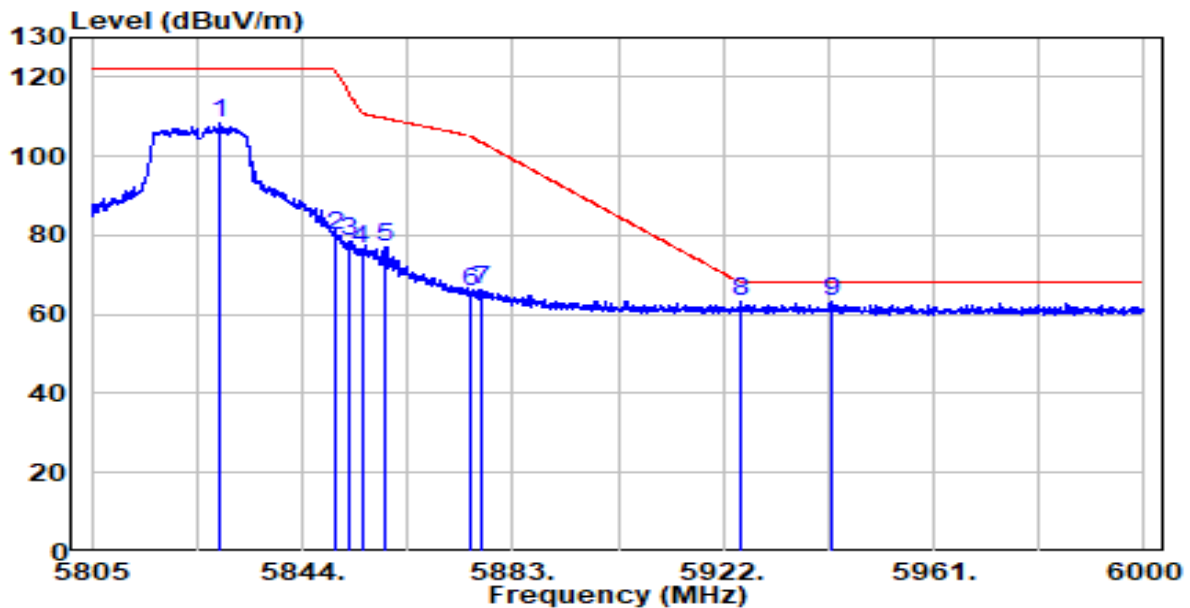


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5828.790	86.92	21.34	108.25	N/A	N/A	Peak
2	5850.000	58.54	21.40	79.94	-42.26	122.20	Peak
3	5852.775	56.97	21.41	78.38	-37.49	115.87	Peak
4	5855.000	55.35	21.42	76.77	-34.03	110.80	Peak
5	5859.210	55.65	21.43	77.08	-32.54	109.62	Peak
6	5875.000	44.48	21.49	65.97	-39.23	105.20	Peak
7	5877.248	44.87	21.49	66.37	-37.16	103.53	Peak
8	5925.000	41.41	21.65	63.06	-5.14	68.20	Peak
9	* 5942.280	41.41	21.70	63.11	-5.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz - Beamforming Mode	Test Voltage	110V/60Hz

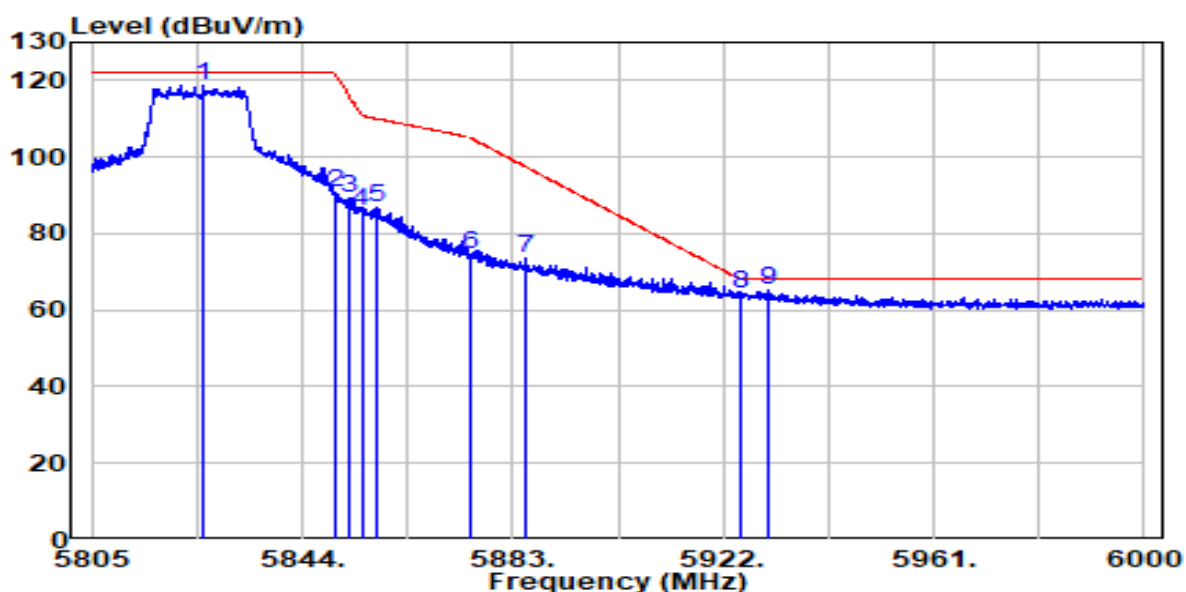


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5825.865	97.27	21.33	118.59	N/A	N/A	Peak
2	5850.000	69.19	21.40	90.60	-31.60	122.20	Peak
3	5852.482	67.98	21.41	89.40	-27.14	116.54	Peak
4	5855.000	64.44	21.42	85.86	-24.94	110.80	Peak
5	5857.942	65.22	21.43	86.65	-23.32	109.97	Peak
6	5875.000	53.05	21.49	74.53	-30.67	105.20	Peak
7	5885.340	52.02	21.52	73.54	-23.99	97.52	Peak
8	5925.000	42.62	21.65	64.27	-3.93	68.20	Peak
9	* 5930.482	43.67	21.66	65.34	-2.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

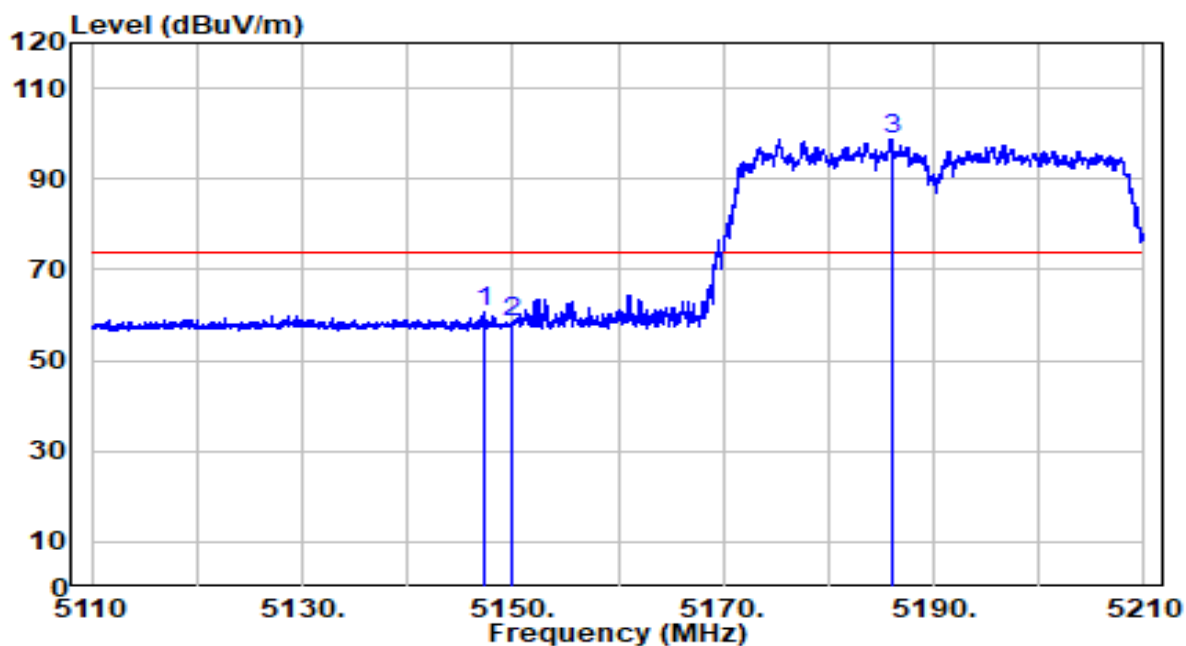


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.350	40.68	19.90	60.59	-13.41	74.00	Peak
2	5150.000	38.63	19.91	58.54	-15.46	74.00	Peak
3	* 5186.050	78.84	19.94	98.78	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

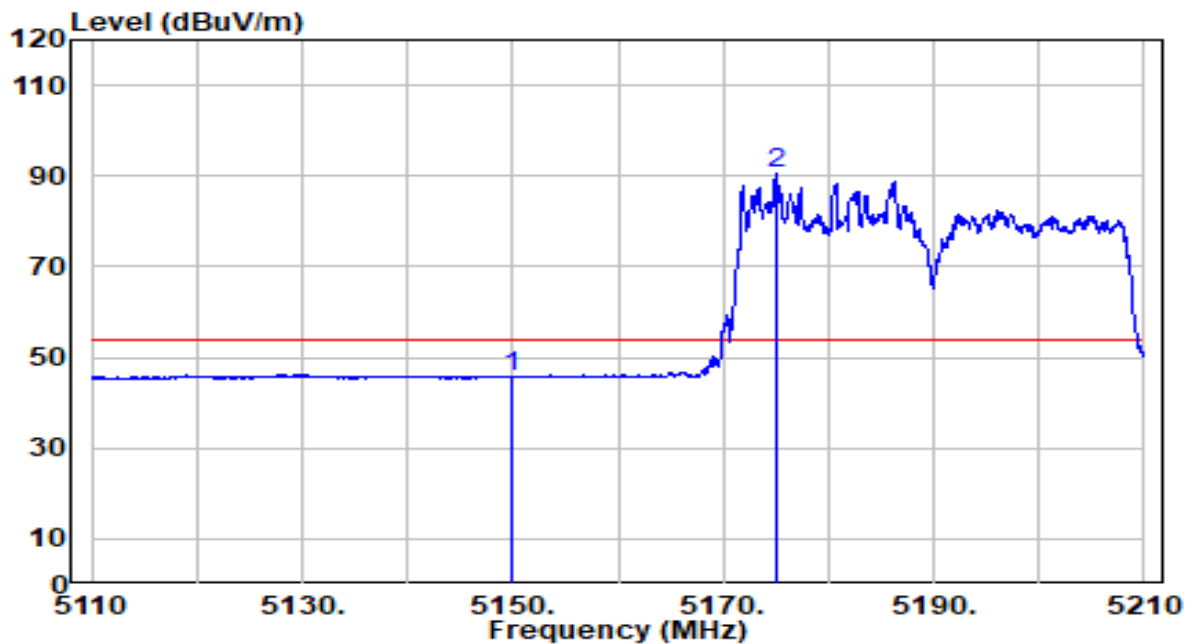


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	25.81	19.91	45.71	-8.29	54.00	Average
2	* 5175.100	70.45	19.93	90.38	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

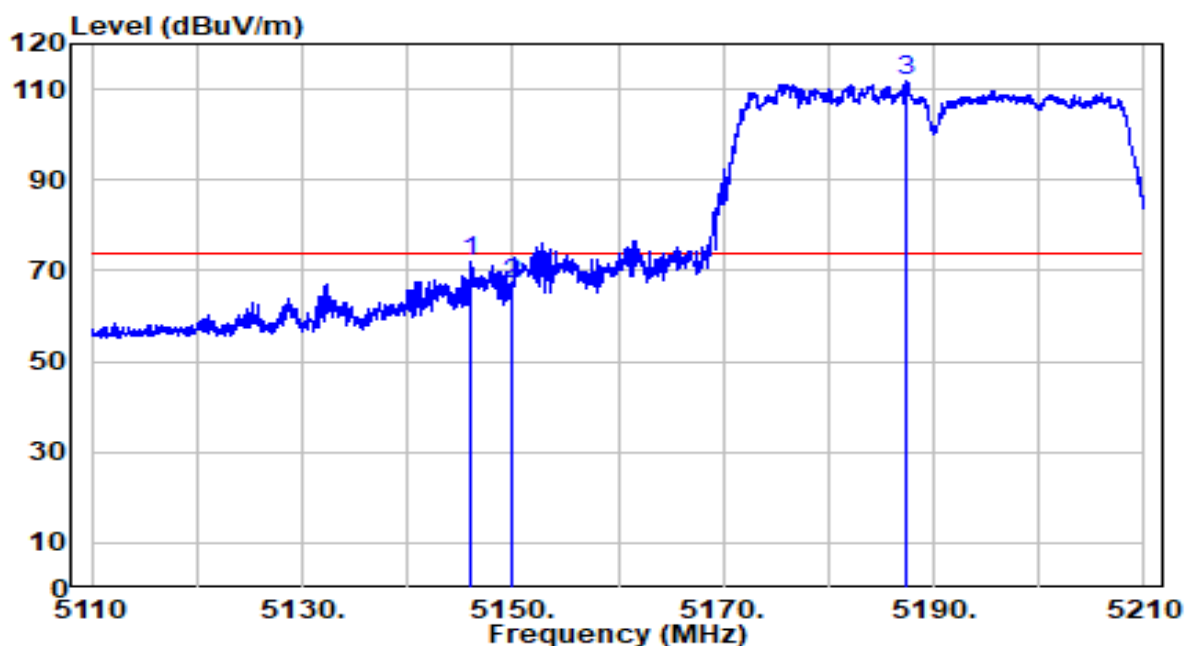


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.100	52.29	19.90	72.19	-1.81	74.00	Peak
2	5150.000	47.13	19.91	67.03	-6.97	74.00	Peak
3	* 5187.450	91.69	19.94	111.64	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

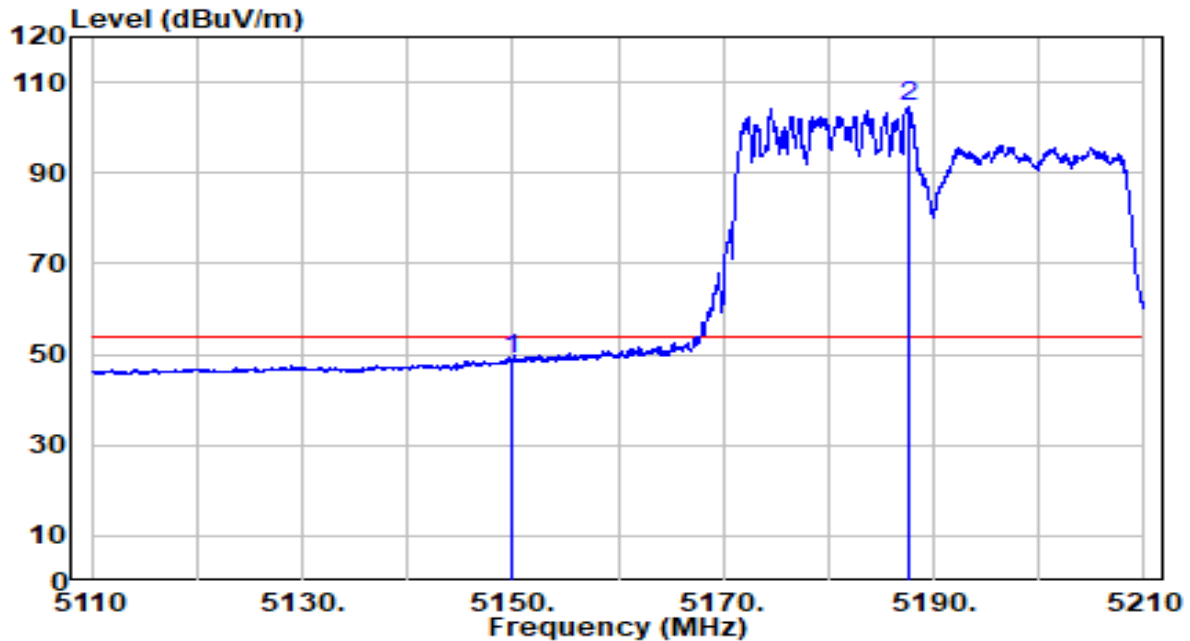


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.84	19.91	48.75	-5.25	54.00	Average
2	* 5187.650	84.80	19.95	104.74	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz - Beamforming Mode	Test Voltage	120V/50Hz

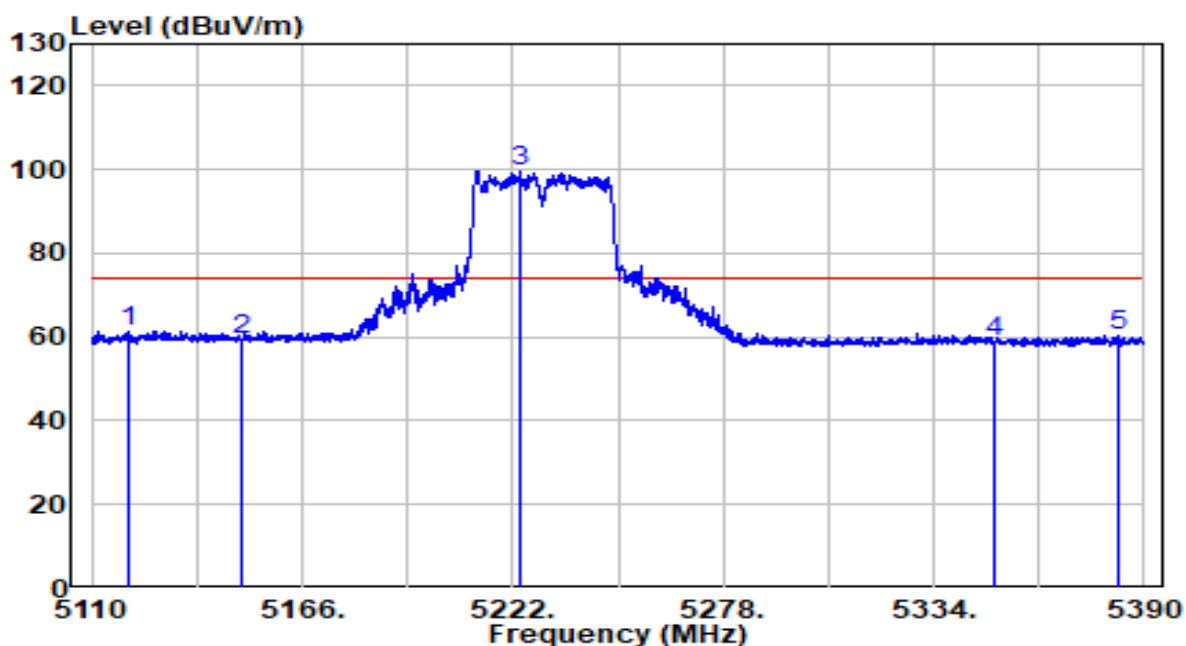


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5119.660	41.58	19.87	61.45	-12.55	74.00	Peak
2	5150.000	39.64	19.91	59.55	-14.45	74.00	Peak
3	* 5223.820	79.81	19.98	99.79	N/A	N/A	Peak
4	5350.000	38.70	20.11	58.82	-15.18	74.00	Peak
5	5383.140	40.16	20.15	60.31	-13.69	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz - Beamforming Mode	Test Voltage	120V/50Hz

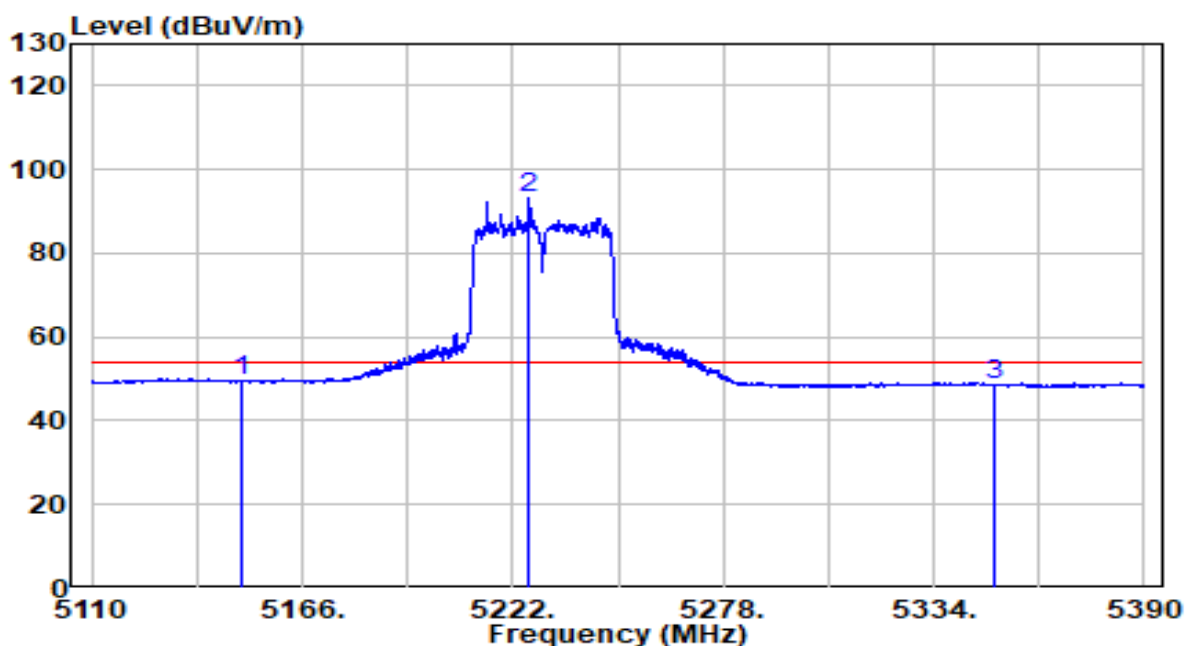


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.40	19.91	49.31	-4.69	54.00	Average
2	* 5226.200	73.18	19.99	93.17	N/A	N/A	Average
3	5350.000	28.51	20.11	48.62	-5.38	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz - Beamforming Mode	Test Voltage	120V/50Hz

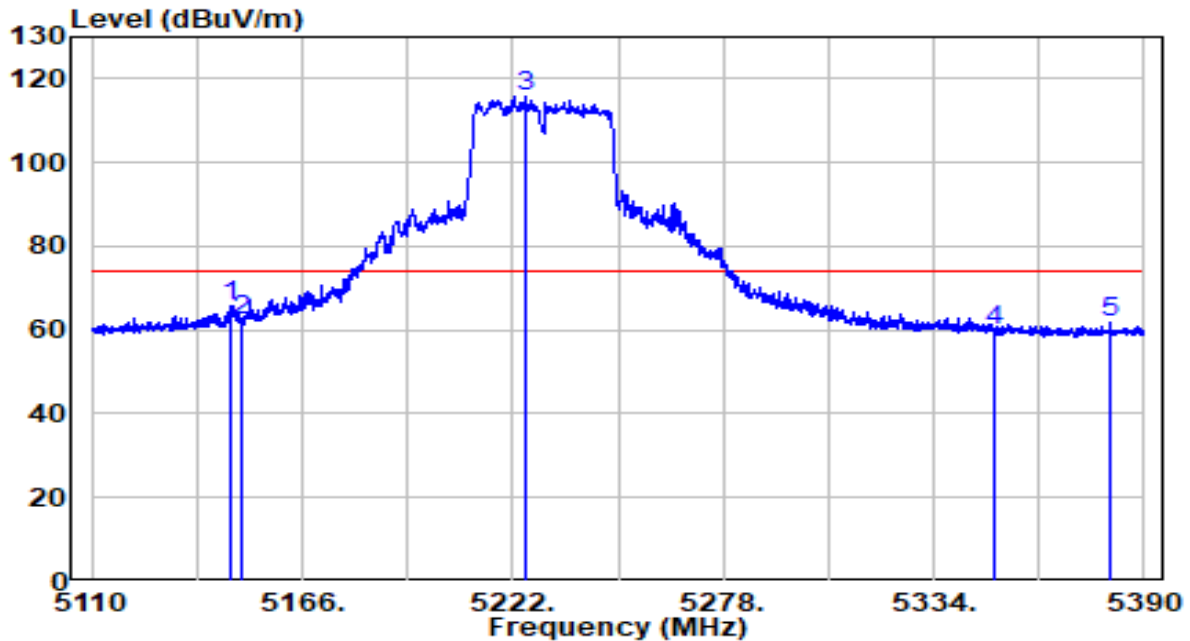


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.100	45.99	19.90	65.90	-8.10	74.00	Peak
2	5150.000	42.29	19.91	62.19	-11.81	74.00	Peak
3	* 5225.500	95.81	19.98	115.79	N/A	N/A	Peak
4	5350.000	39.78	20.11	59.90	-14.10	74.00	Peak
5	5380.760	41.71	20.15	61.86	-12.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz - Beamforming Mode	Test Voltage	120V/50Hz

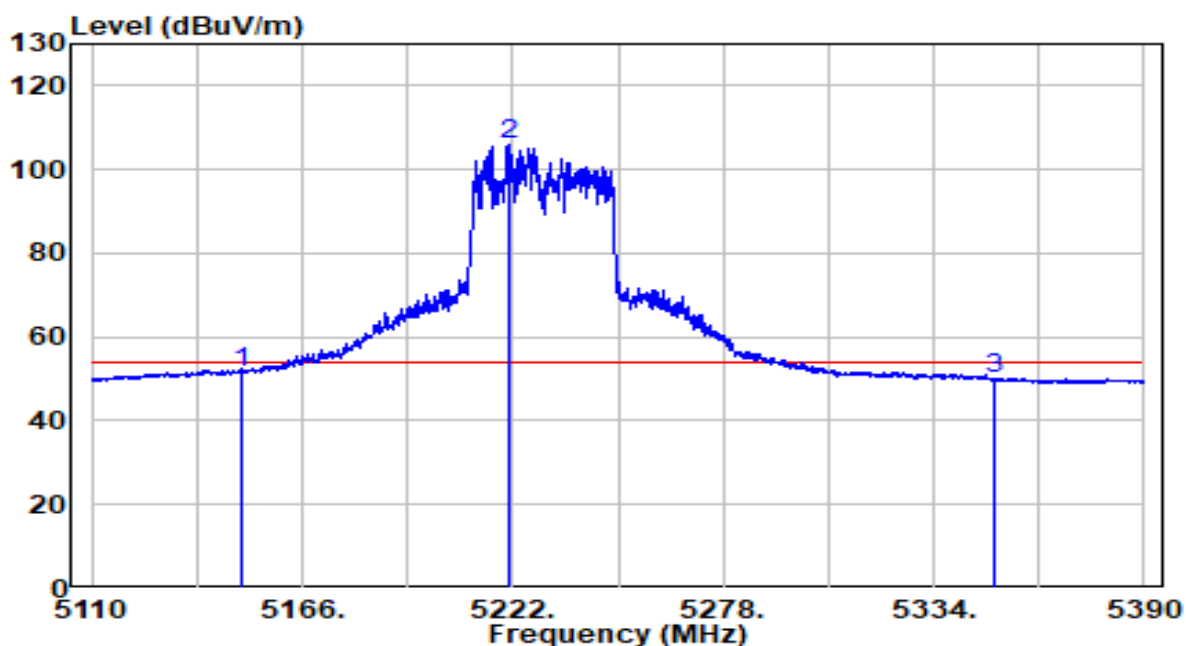


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	31.84	19.91	51.74	-2.26	54.00	Average
2	* 5221.020	85.87	19.98	105.85	N/A	N/A	Average
3	5350.000	29.72	20.11	49.83	-4.17	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz - Beamforming mode	Test Voltage	110V/60Hz

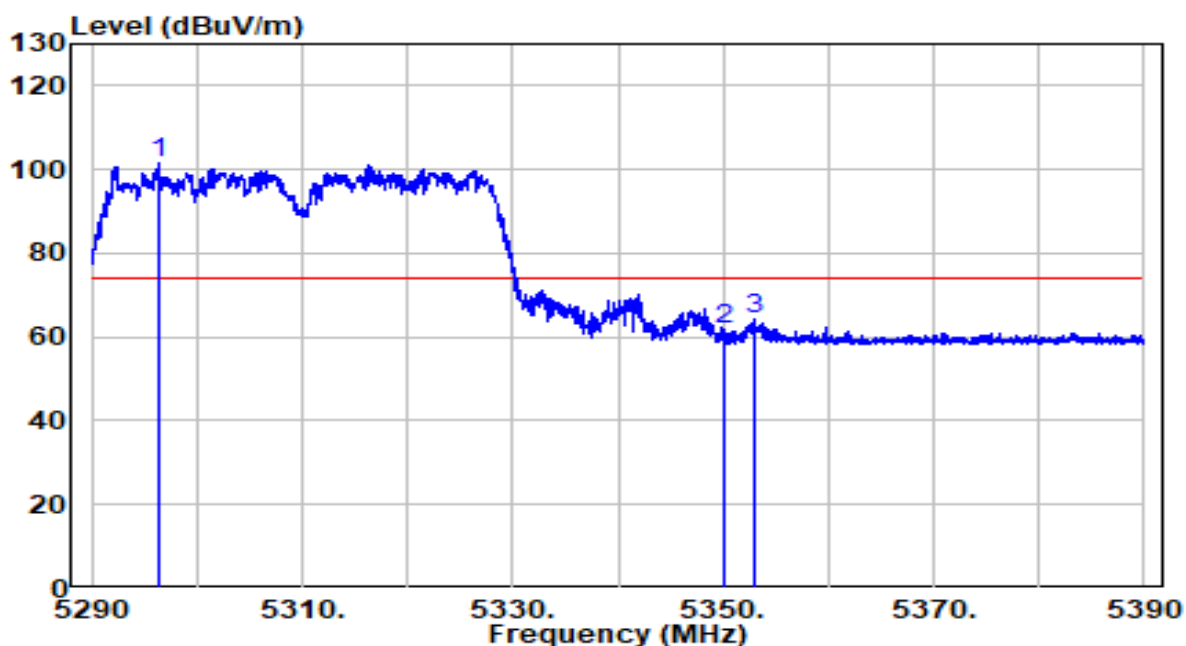


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5296.450	81.40	20.06	101.46	N/A	N/A	Peak
2		5350.000	41.62	20.11	61.74	-12.26	74.00	Peak
3		5352.850	44.08	20.12	64.20	-9.80	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz - Beamforming mode	Test Voltage	110V/60Hz

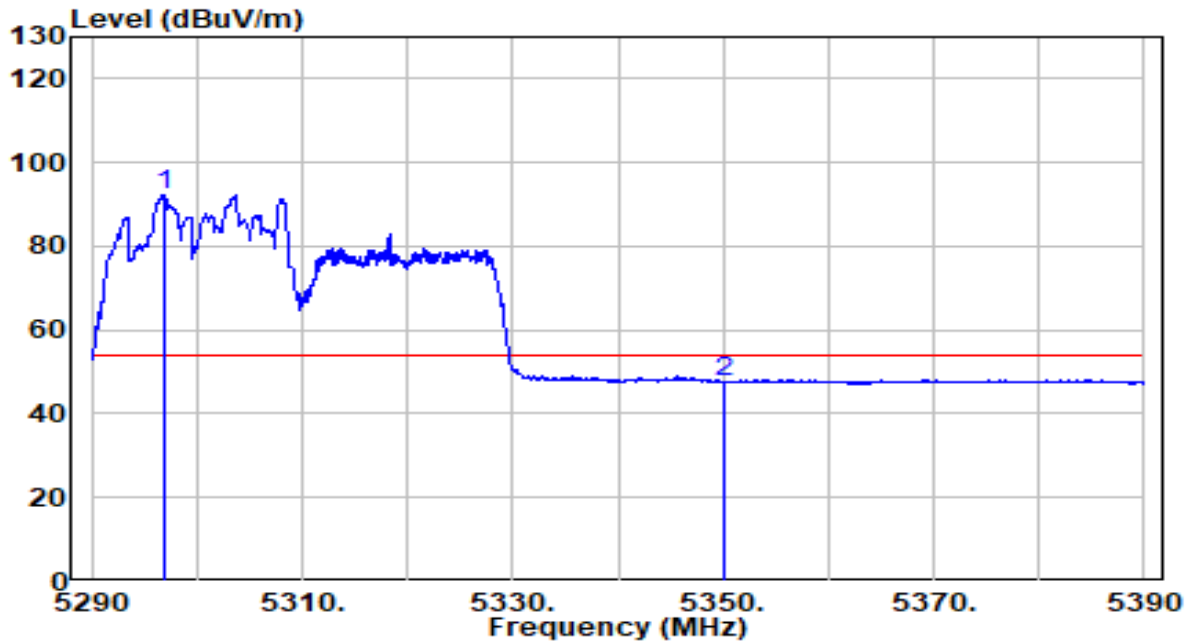


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5296.800	72.14	20.06	92.20	N/A	N/A	Average
2		5350.000	27.54	20.11	47.65	-6.35	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz - Beamforming mode	Test Voltage	110V/60Hz

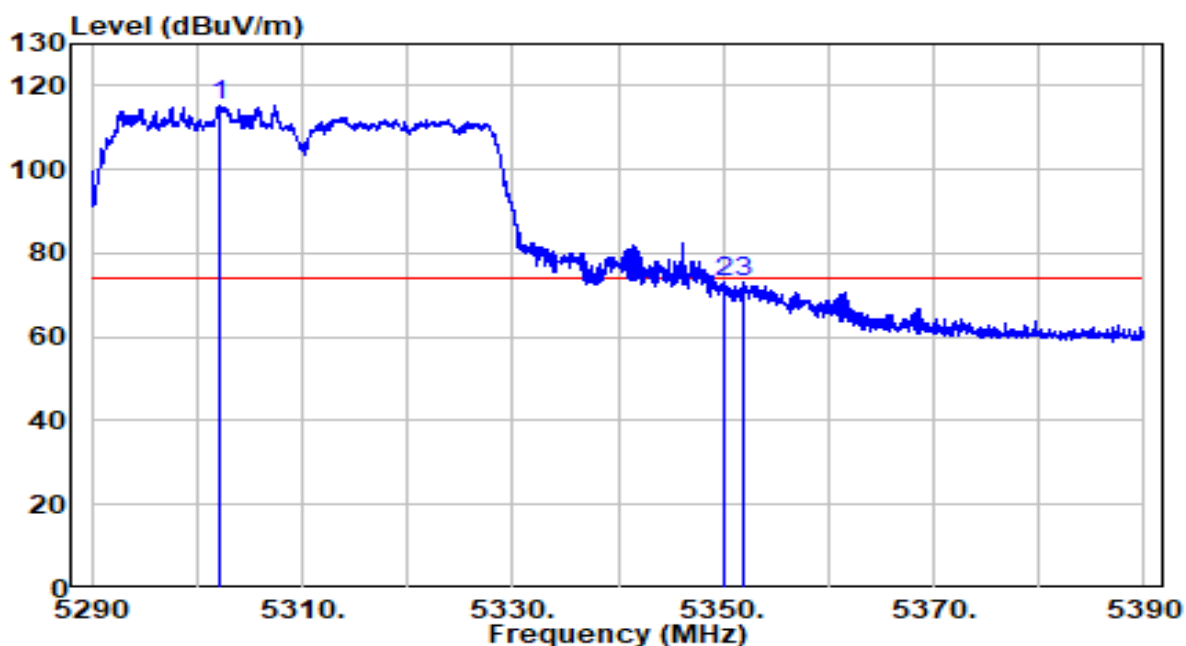


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5302.100	95.13	20.06	115.19	N/A	N/A	Peak
2		5350.000	52.82	20.11	72.94	-1.07	74.00	Peak
3		5352.000	52.80	20.12	72.92	-1.08	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz - Beamforming mode	Test Voltage	110V/60Hz

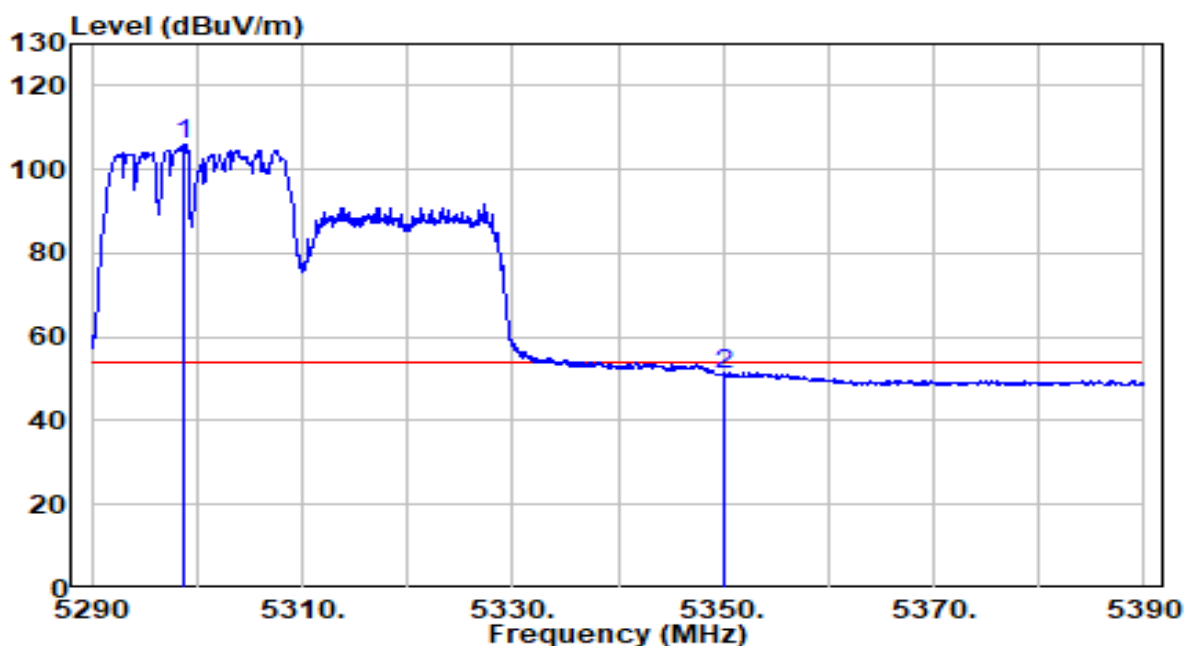


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5298.700	85.94	20.06	106.00	N/A	N/A	Average
2		5350.000	30.82	20.11	50.93	-3.07	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz - Beamforming mode	Test Voltage	110V/60Hz

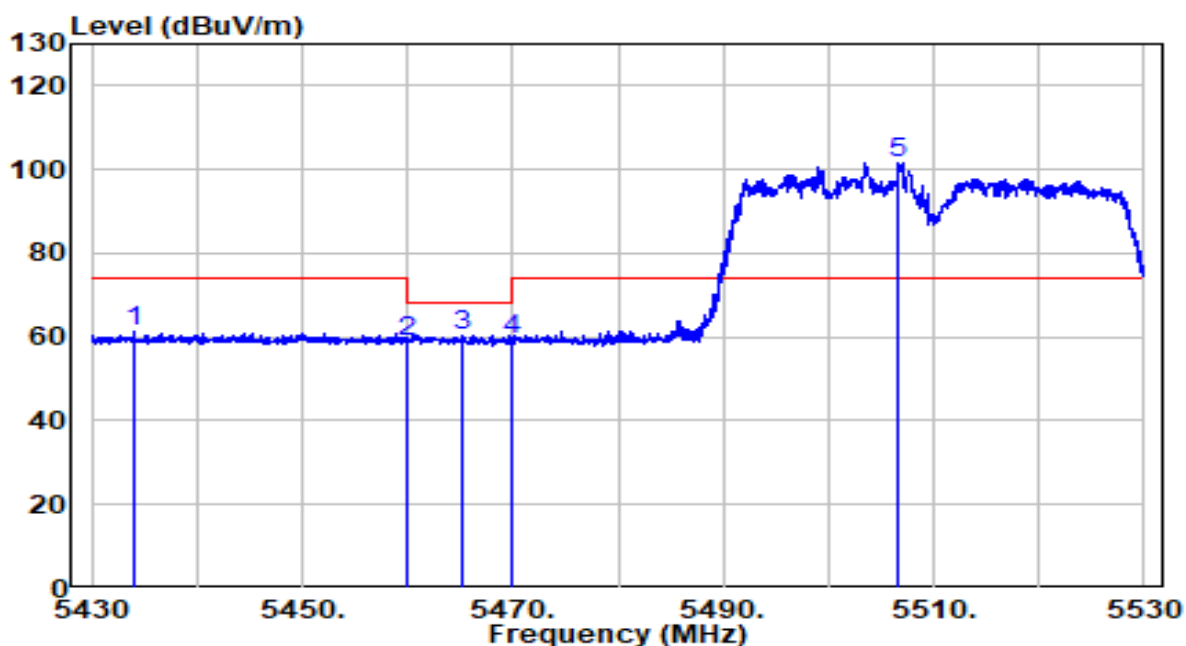


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5433.950	40.97	20.20	61.17	-12.83	74.00	Peak
2	5460.000	38.51	20.23	58.73	-9.47	68.20	Peak
3	5465.200	40.19	20.23	60.43	-7.77	68.20	Peak
4	5470.000	39.16	20.24	59.40	-8.80	68.20	Peak
5	* 5506.700	81.43	20.29	101.72	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz - Beamforming mode	Test Voltage	110V/60Hz

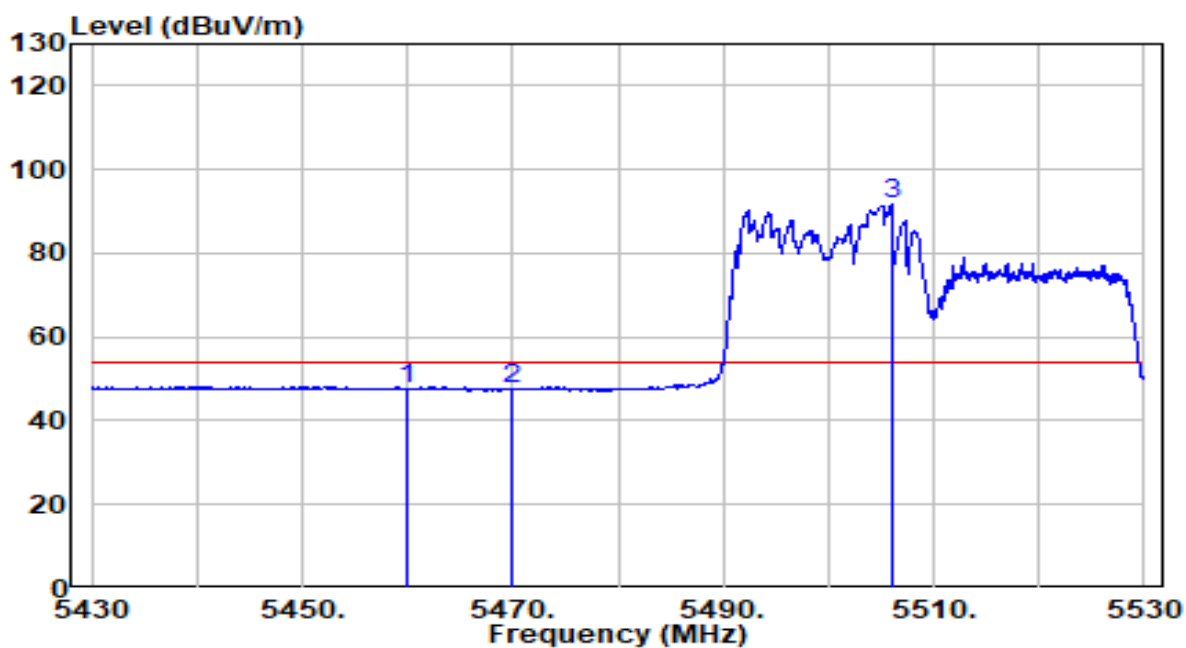


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.45	20.23	47.67	-6.33	54.00	Average
2	5470.000	27.46	20.24	47.69	-6.31	54.00	Average
3	* 5505.950	71.35	20.29	91.64	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz - Beamforming mode	Test Voltage	110V/60Hz

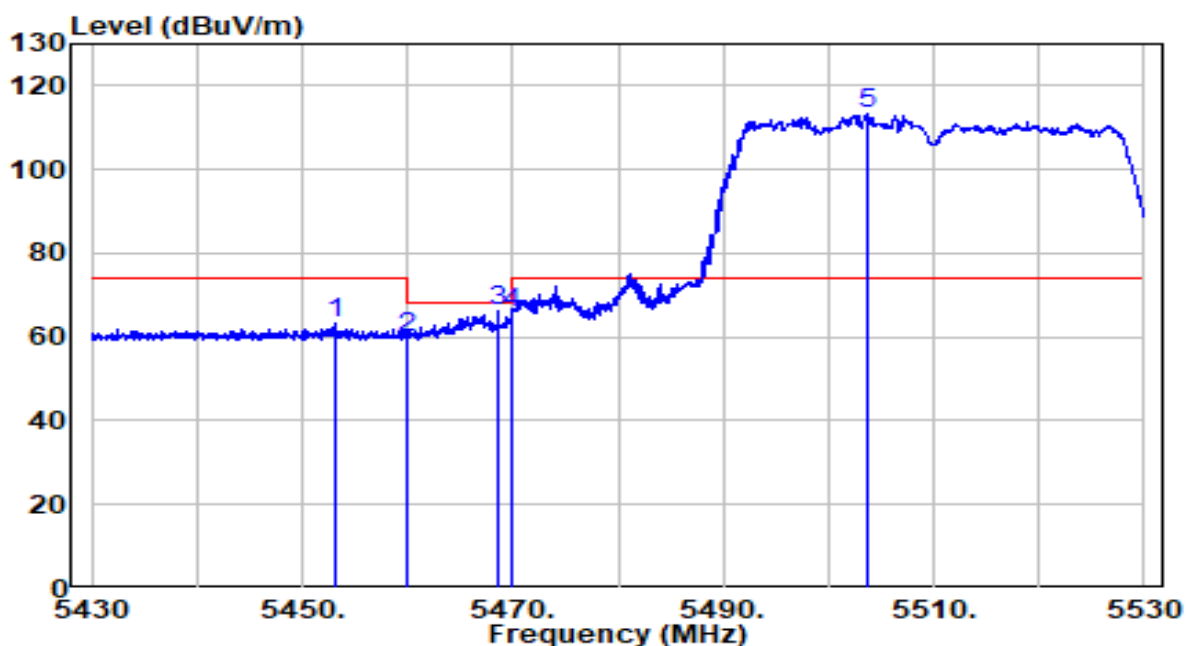


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.100	42.98	20.22	63.20	-10.80	74.00	Peak
2	5460.000	39.76	20.23	59.99	-8.21	68.20	Peak
3	5468.600	46.11	20.24	66.35	-1.85	68.20	Peak
4	5470.000	45.38	20.24	65.62	-2.58	68.20	Peak
5	* 5503.600	92.98	20.28	113.26	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz - Beamforming mode	Test Voltage	110V/60Hz

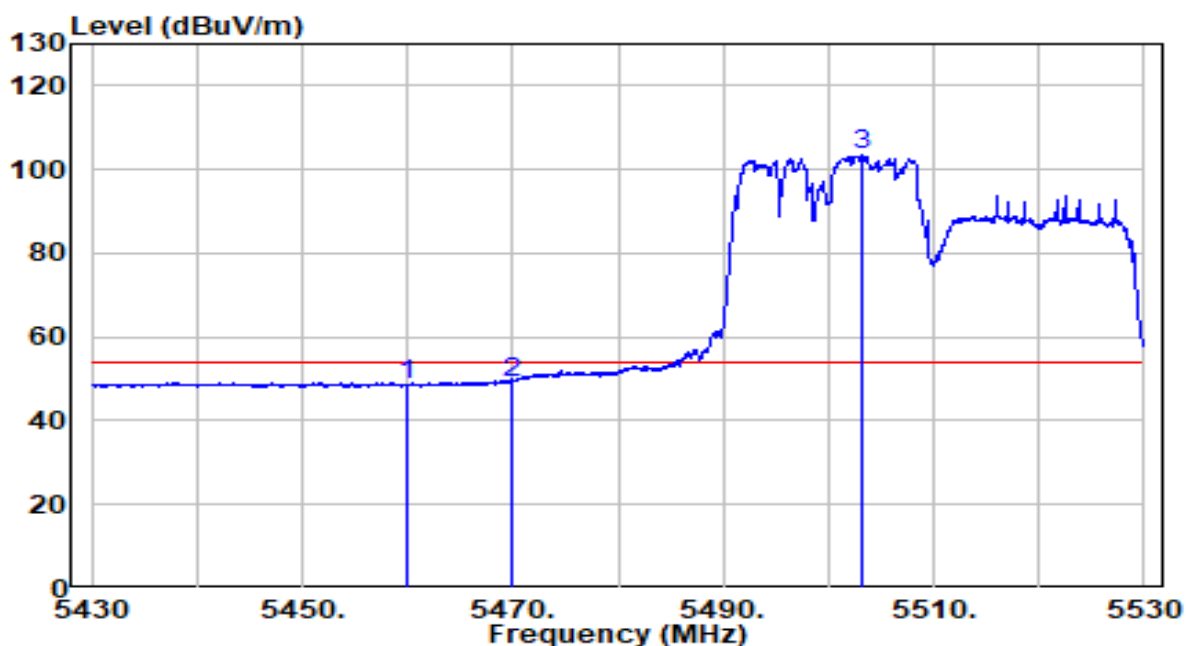


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	28.46	20.23	48.69	-5.31	54.00	Average
2	5470.000	29.01	20.24	49.25	-4.75	54.00	Average
3	* 5503.300	83.01	20.28	103.29	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz - Beamforming mode	Test Voltage	110V/60Hz

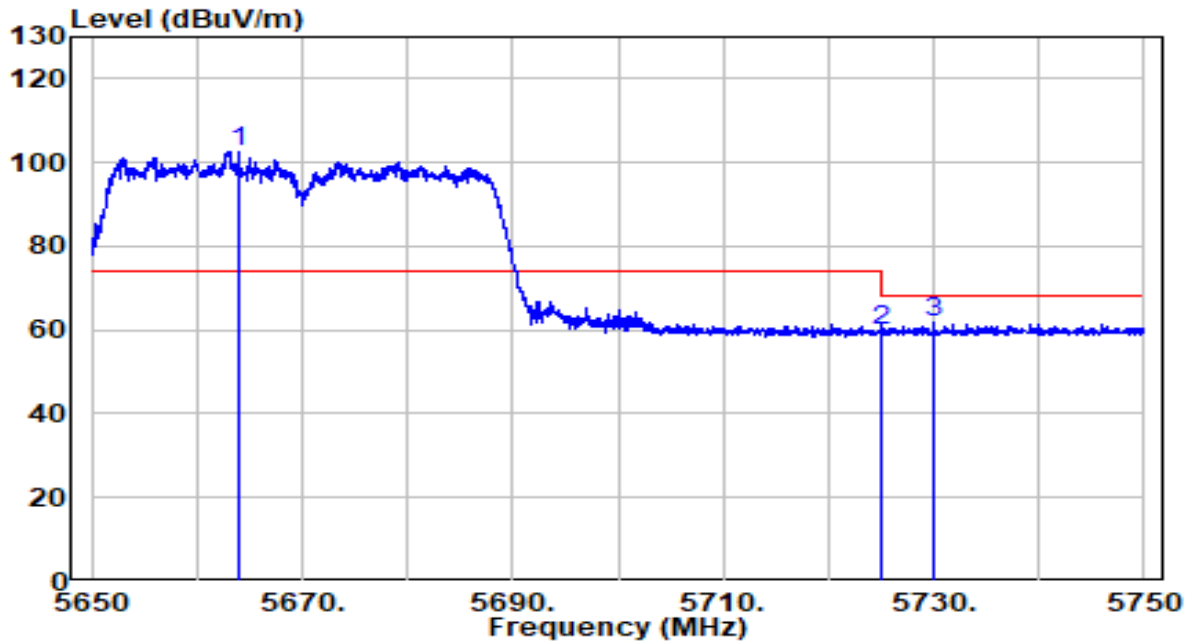


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5663.950	81.93	20.80	102.73	N/A	N/A	Peak
2		5725.000	38.93	21.00	59.93	-8.27	68.20	Peak
3		5730.050	40.63	21.02	61.65	-6.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz - Beamforming mode	Test Voltage	110V/60Hz

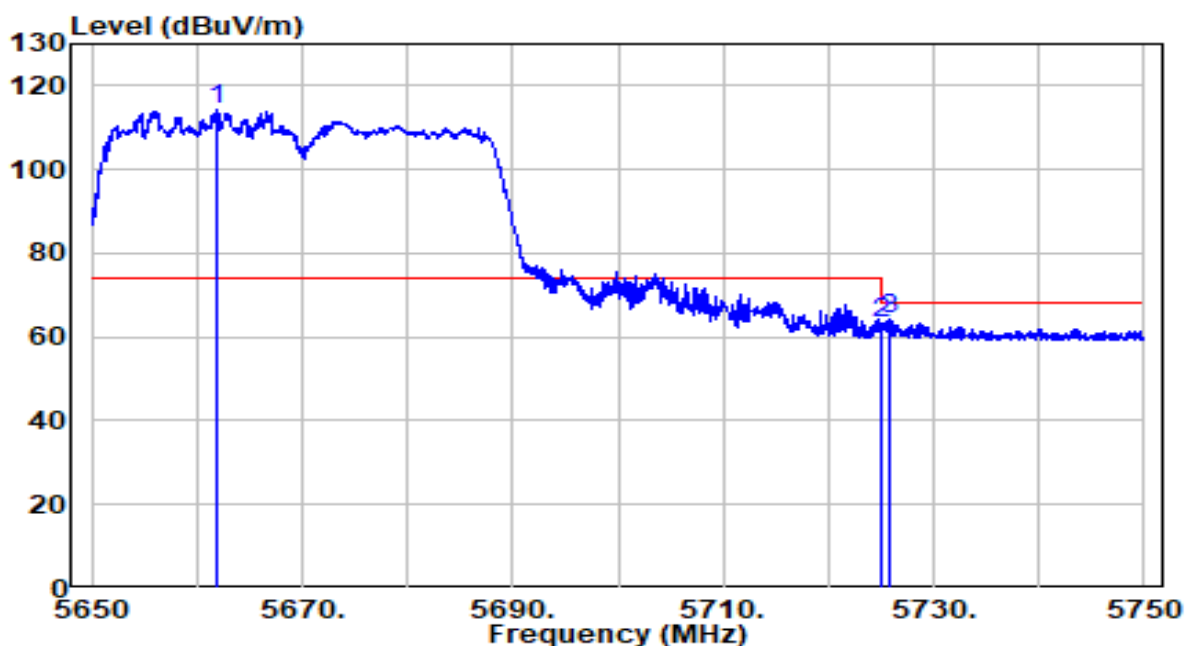


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5661.850	93.29	20.79	114.08	N/A	N/A	Peak
2		5725.000	42.22	21.00	63.22	-4.98	68.20	Peak
3		5725.750	43.44	21.00	64.44	-3.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz - Beamforming Mode	Test Voltage	110V/60Hz

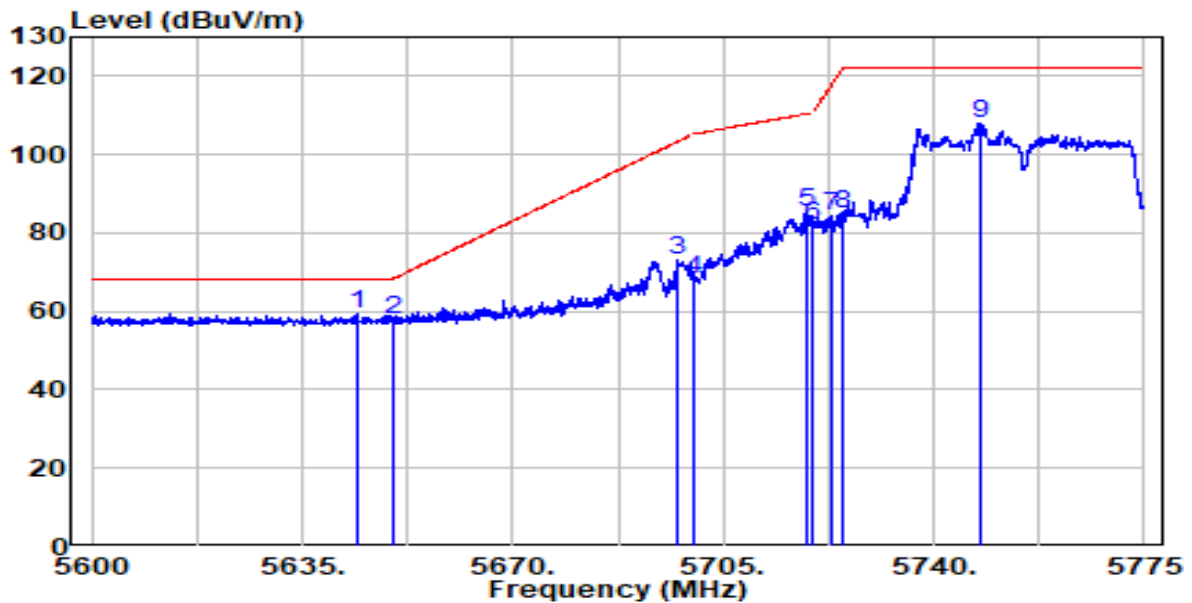


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5644.013	38.54	20.74	59.28	-8.92	68.20	Peak
2		5650.000	37.23	20.76	57.98	-10.22	68.20	Peak
3		5697.563	52.08	20.91	72.99	-30.41	103.40	Peak
4		5700.000	47.32	20.92	68.23	-36.97	105.20	Peak
5		5719.087	64.22	20.98	85.20	-25.34	110.54	Peak
6		5720.000	60.85	20.98	81.83	-28.97	110.80	Peak
7		5723.025	63.59	20.99	84.59	-33.11	117.70	Peak
8		5725.000	63.87	21.00	84.87	-37.33	122.20	Peak
9		5747.612	86.85	21.07	107.92	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz - Beamforming Mode	Test Voltage	110V/60Hz

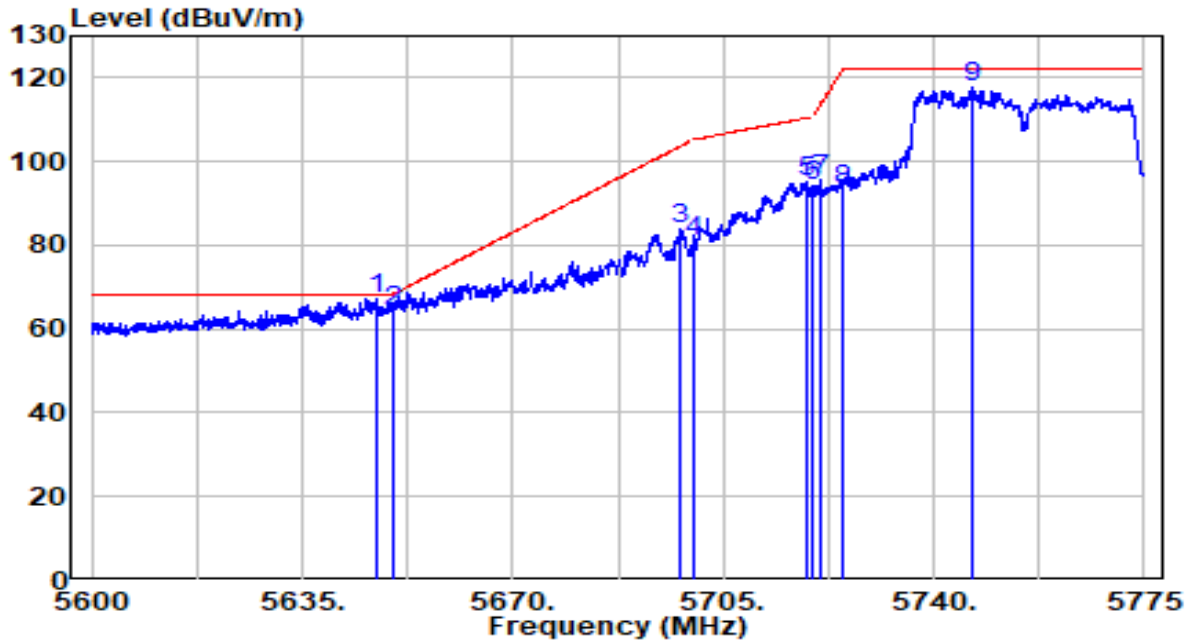


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5647.425	46.49	20.75	67.24	-0.96	68.20	Peak
2		5650.000	43.47	20.76	64.22	-3.98	68.20	Peak
3		5697.825	62.76	20.91	83.68	-19.92	103.60	Peak
4		5700.000	59.88	20.92	80.80	-24.40	105.20	Peak
5		5718.825	74.14	20.98	95.12	-15.35	110.47	Peak
6		5720.000	73.36	20.98	94.34	-16.46	110.80	Peak
7		5721.275	74.50	20.99	95.48	-18.22	113.71	Peak
8		5725.000	72.41	21.00	93.41	-28.79	122.20	Peak
9		5746.563	96.51	21.07	117.58	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz - Beamforming Mode	Test Voltage	110V/60Hz

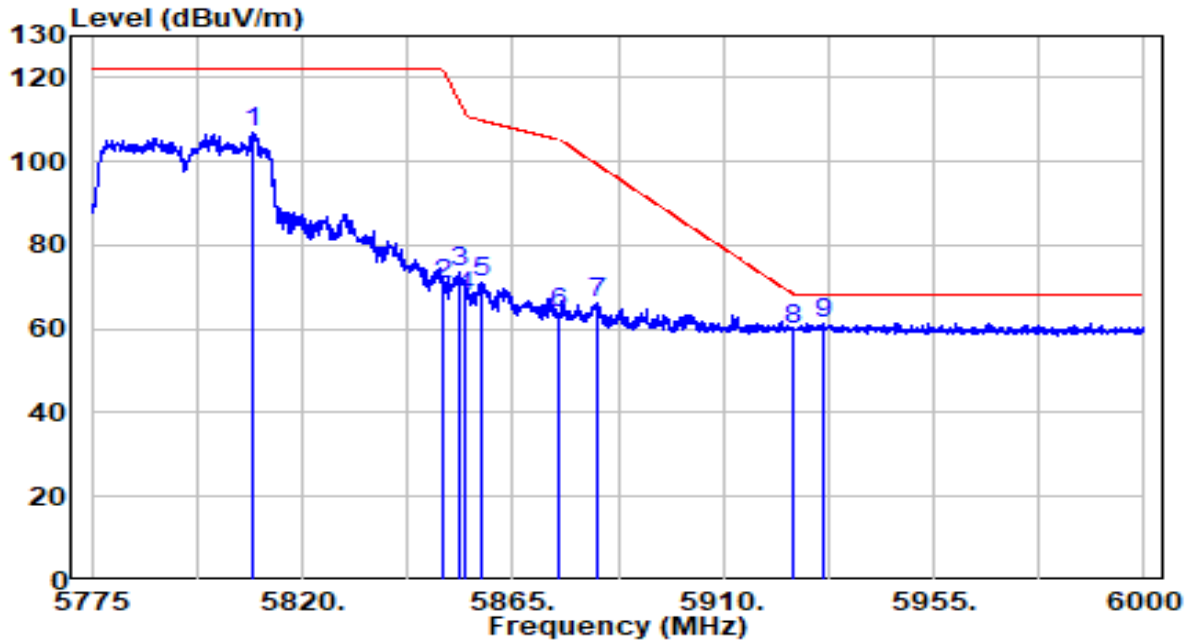


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5809.313	85.48	21.27	106.75	N/A	N/A	Peak
2	5850.000	49.30	21.40	70.70	-51.50	122.20	Peak
3	5853.638	52.14	21.42	73.56	-40.35	113.91	Peak
4	5855.000	46.12	21.42	67.54	-43.26	110.80	Peak
5	5858.138	49.77	21.43	71.21	-38.71	109.92	Peak
6	5875.000	42.39	21.49	63.87	-41.33	105.20	Peak
7	5883.112	44.68	21.51	66.19	-32.99	99.18	Peak
8	5925.000	38.09	21.65	59.73	-8.47	68.20	Peak
9	* 5931.263	39.80	21.67	61.47	-6.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz - Beamforming Mode	Test Voltage	110V/60Hz

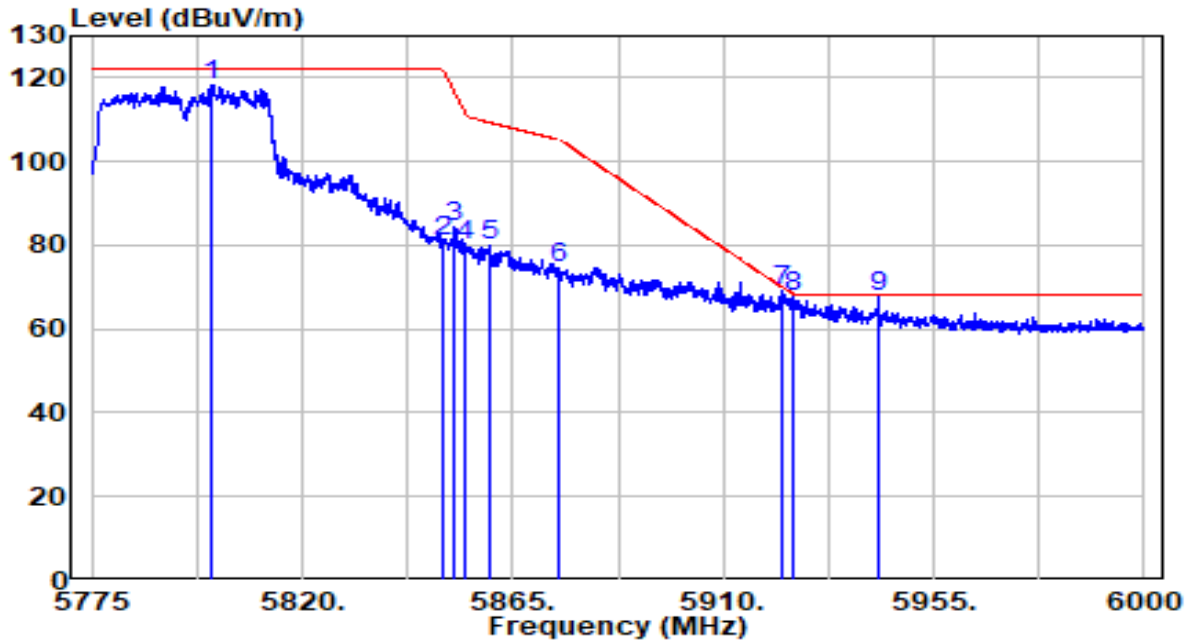


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5800.538	97.15	21.24	118.39	N/A	N/A	Peak
2	5850.000	59.53	21.40	80.93	-41.27	122.20	Peak
3	5852.625	62.79	21.41	84.20	-32.01	116.21	Peak
4	5855.000	58.33	21.42	79.75	-31.05	110.80	Peak
5	5860.163	58.71	21.44	80.15	-29.21	109.35	Peak
6	5875.000	53.24	21.49	74.73	-30.47	105.20	Peak
7	5922.600	47.73	21.64	69.37	-0.60	69.97	Peak
8	5925.000	45.92	21.65	67.57	-0.63	68.20	Peak
9	* 5943.300	46.06	21.71	67.77	-0.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

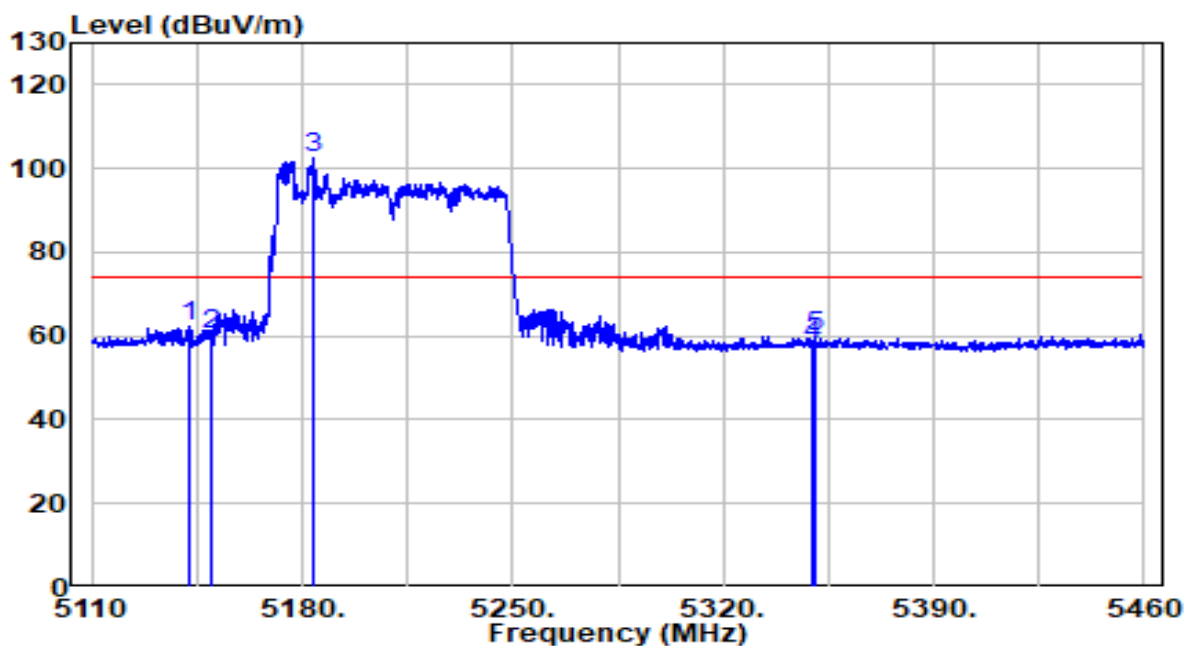


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5142.025	42.36	19.90	62.26	-11.74	74.00	Peak
2	5150.000	40.62	19.91	60.53	-13.47	74.00	Peak
3	* 5183.850	82.68	19.94	102.62	N/A	N/A	Peak
4	5350.000	37.66	20.11	57.77	-16.23	74.00	Peak
5	5350.625	39.55	20.11	59.66	-14.34	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

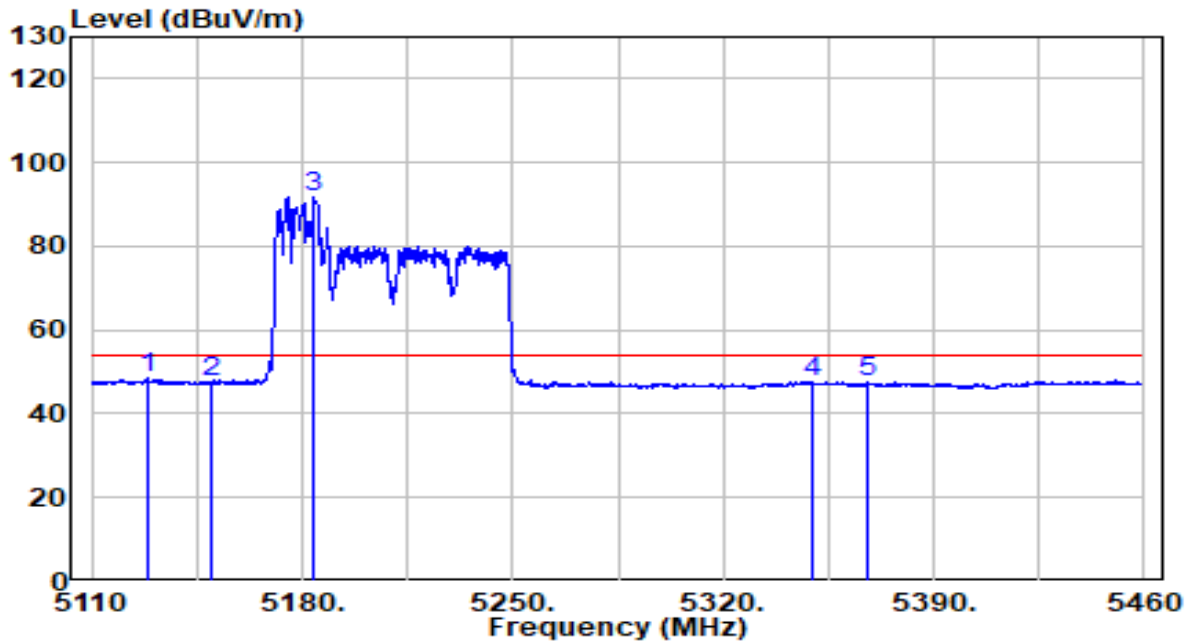


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5128.375	28.59	19.88	48.48	-5.52	54.00	Average
2	5150.000	27.52	19.91	47.43	-6.57	54.00	Average
3	* 5183.850	71.72	19.94	91.66	N/A	N/A	Average
4	5350.000	27.28	20.11	47.39	-6.61	54.00	Average
5	5367.600	27.30	20.13	47.43	-6.57	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

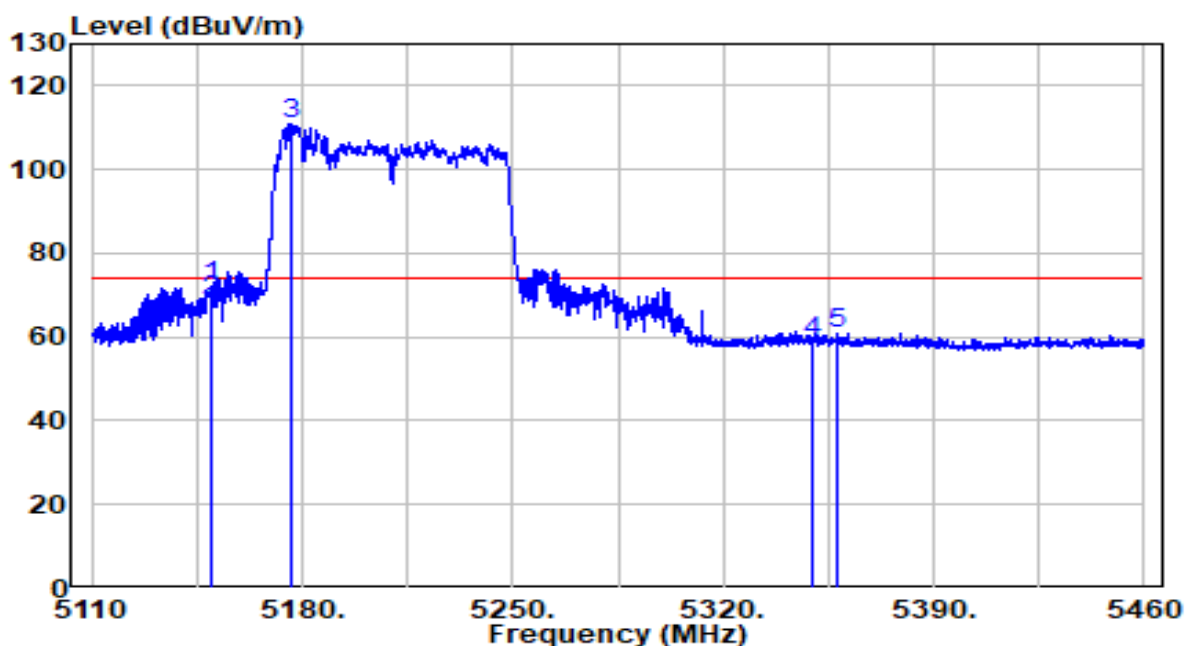


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.900	52.30	19.91	72.21	-1.79	74.00	Peak
2	5150.000	48.53	19.91	68.44	-5.56	74.00	Peak
3	* 5176.675	91.05	19.93	110.98	N/A	N/A	Peak
4	5350.000	38.64	20.11	58.76	-15.24	74.00	Peak
5	5357.800	40.68	20.12	60.81	-13.19	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

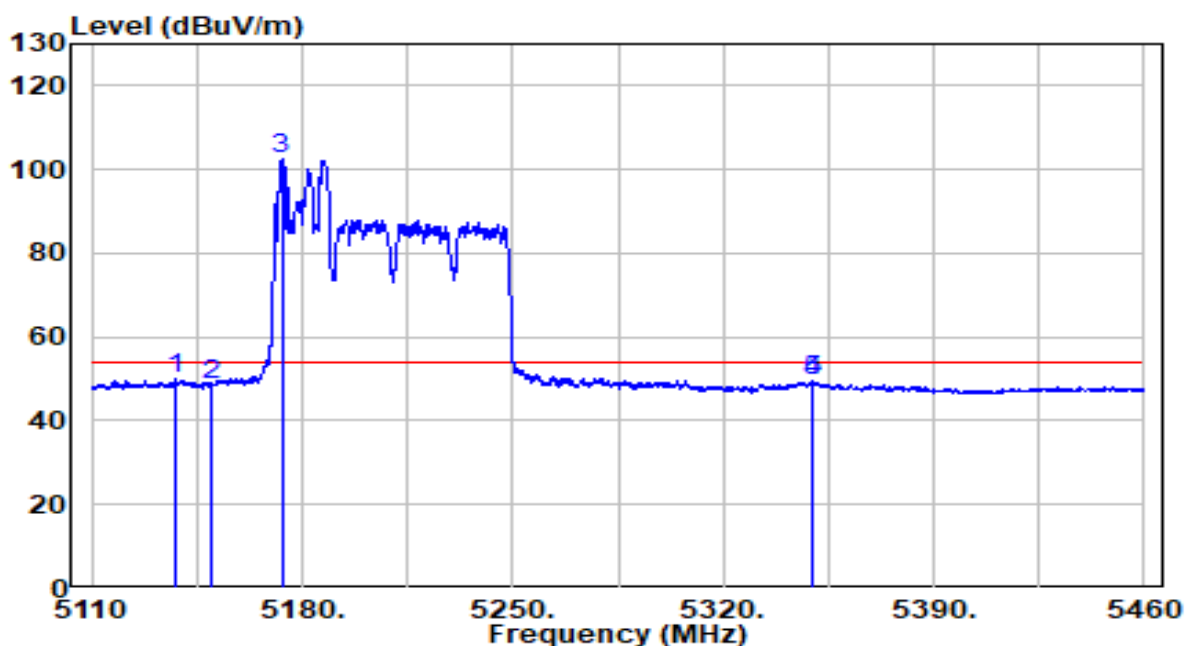


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5137.825	30.19	19.89	50.09	-3.91	54.00	Average
2	5150.000	28.60	19.91	48.51	-5.49	54.00	Average
3	* 5173.175	82.42	19.93	102.35	N/A	N/A	Average
4	5349.925	29.20	20.11	49.31	-4.69	54.00	Average
5	5350.000	29.20	20.11	49.31	-4.69	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz - Beamforming mode	Test Voltage	110V/60Hz

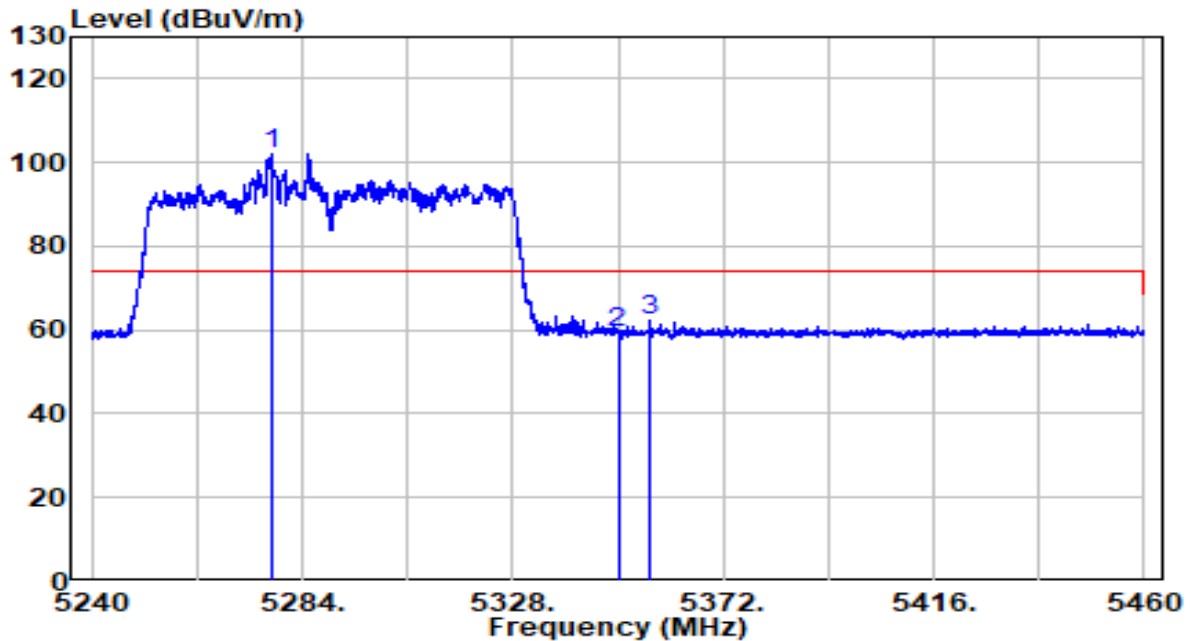


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5277.510	81.95	20.04	101.99	N/A	N/A	Peak
2		5350.000	39.08	20.11	59.19	-14.81	74.00	Peak
3		5356.490	42.25	20.12	62.37	-11.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz - Beamforming mode	Test Voltage	110V/60Hz

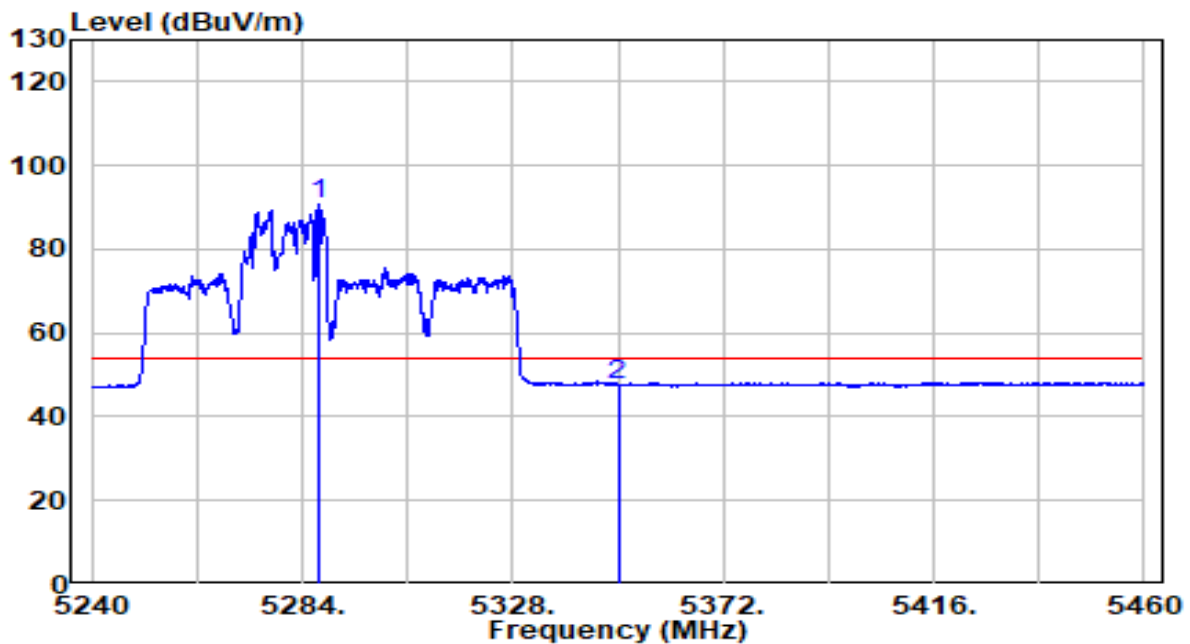


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5287.410	70.81	20.05	90.86	N/A	N/A	Average
2		5350.000	27.63	20.11	47.75	-6.25	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz - Beamforming mode	Test Voltage	110V/60Hz

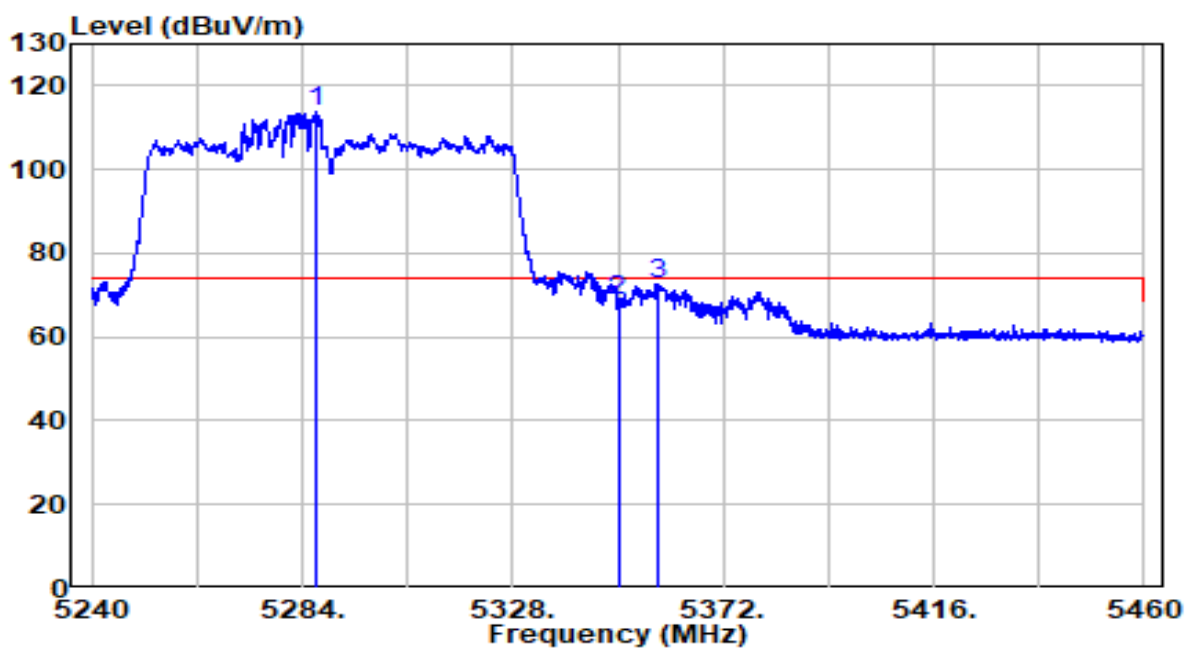


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5287.080	93.63	20.05	113.68	N/A	N/A	Peak
2		5350.000	48.64	20.11	68.75	-5.25	74.00	Peak
3		5358.360	52.43	20.12	72.55	-1.45	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz - Beamforming mode	Test Voltage	110V/60Hz

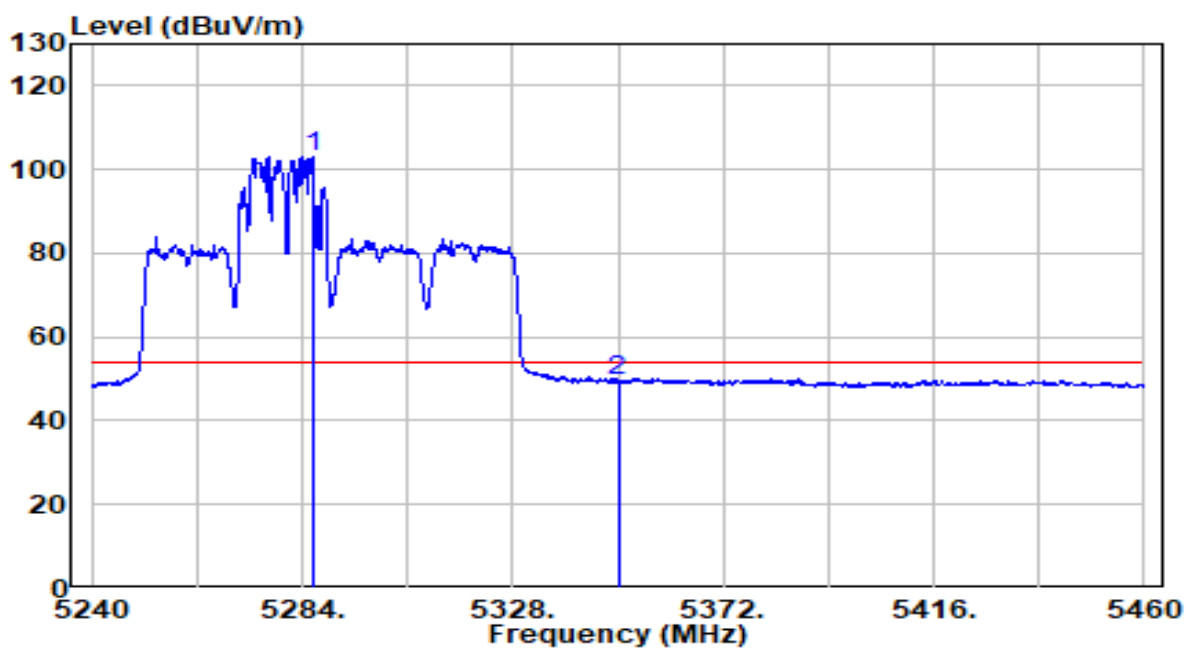


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5286.200	83.10	20.05	103.15	N/A	N/A	Average
2		5350.000	29.37	20.11	49.48	-4.52	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz - Beamforming mode	Test Voltage	110V/60Hz

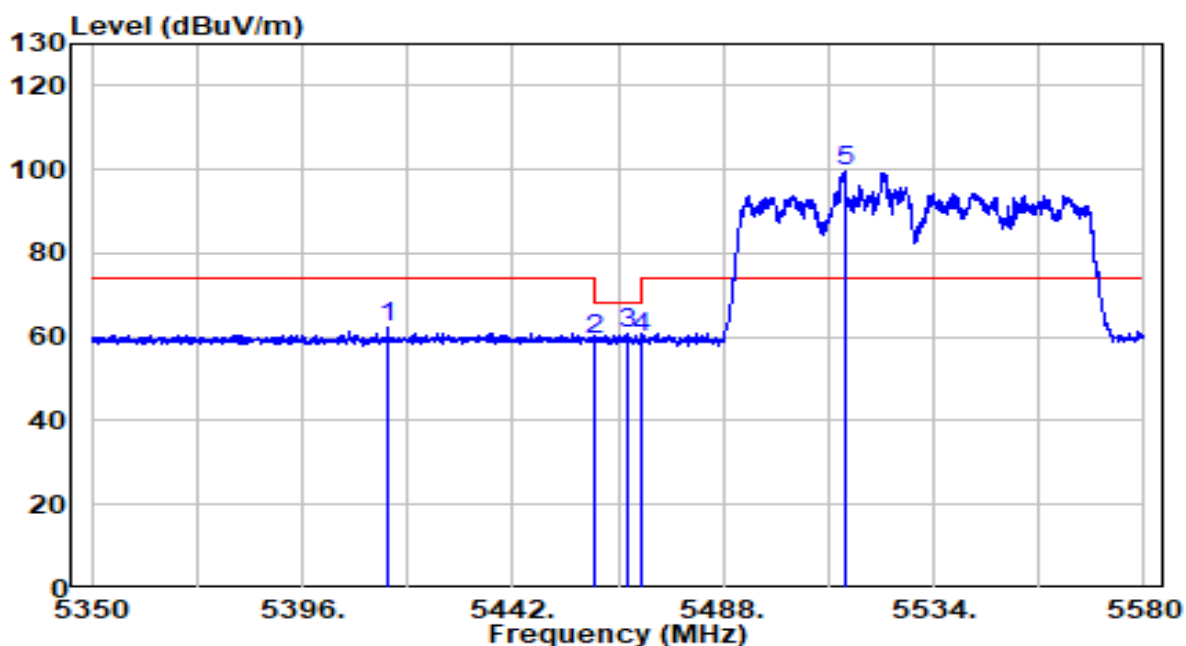


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5414.860	42.03	20.18	62.22	-11.78	74.00	Peak
2	5460.000	39.14	20.23	59.37	-8.83	68.20	Peak
3	5466.840	40.55	20.24	60.79	-7.41	68.20	Peak
4	5470.000	39.56	20.24	59.80	-8.40	68.20	Peak
5	* 5514.450	79.27	20.32	99.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz - Beamforming mode	Test Voltage	110V/60Hz

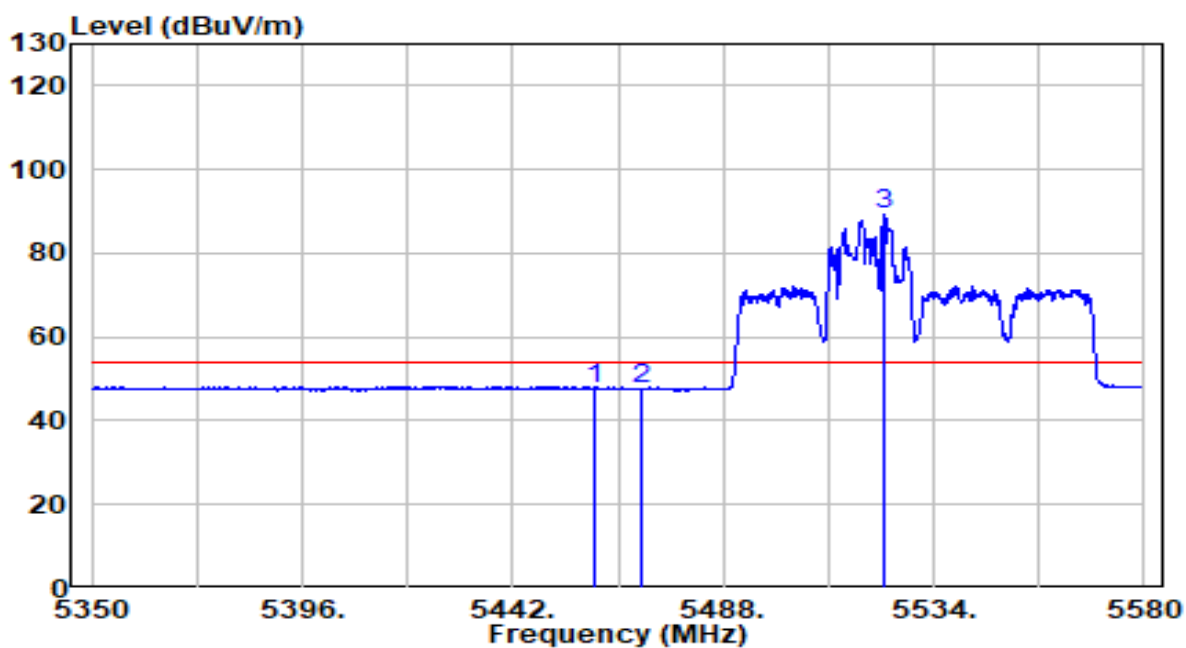


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.42	20.23	47.65	-6.35	54.00	Average
2	5470.000	27.29	20.24	47.53	-6.47	54.00	Average
3	* 5523.190	68.92	20.35	89.26	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz - Beamforming mode	Test Voltage	110V/60Hz

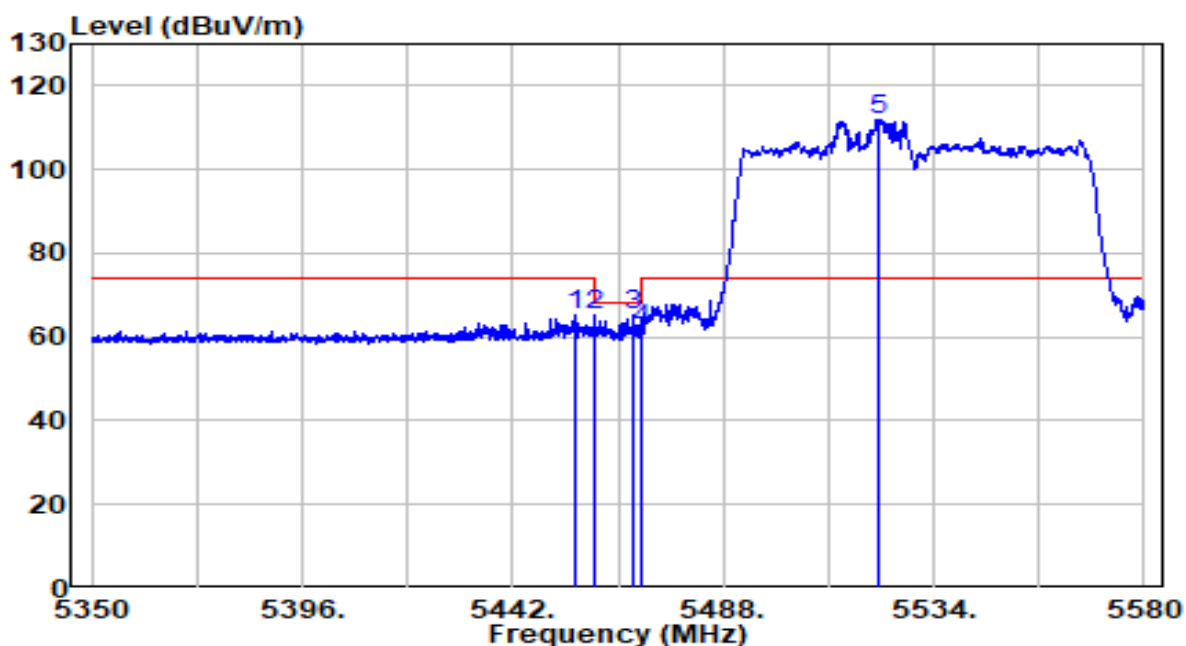


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.455	45.14	20.22	65.36	-8.64	74.00	Peak
2	5460.000	45.18	20.23	65.41	-2.79	68.20	Peak
3	5468.565	44.78	20.24	65.01	-3.19	68.20	Peak
4	5470.000	41.43	20.24	61.67	-6.53	68.20	Peak
5	* 5521.810	91.55	20.34	111.89	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz - Beamforming mode	Test Voltage	110V/60Hz

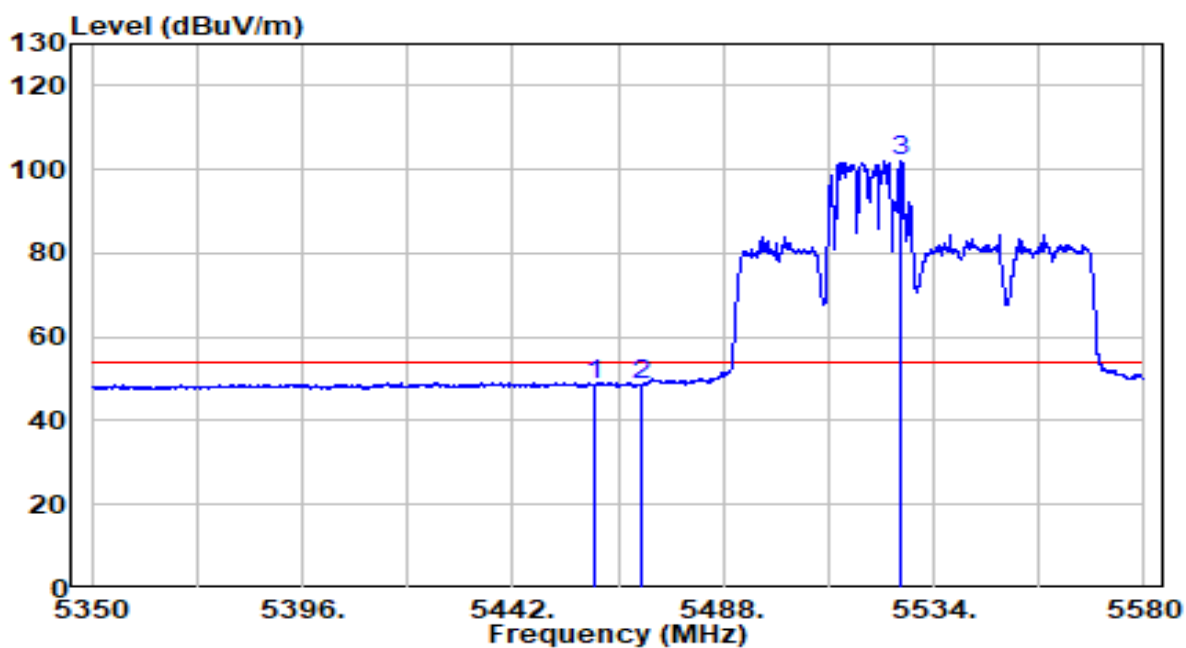


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	28.32	20.23	48.55	-5.45	54.00	Average
2	5470.000	28.10	20.24	48.33	-5.67	54.00	Average
3	* 5526.870	81.73	20.36	102.09	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz - Beamforming Mode	Test Voltage	110V/60Hz

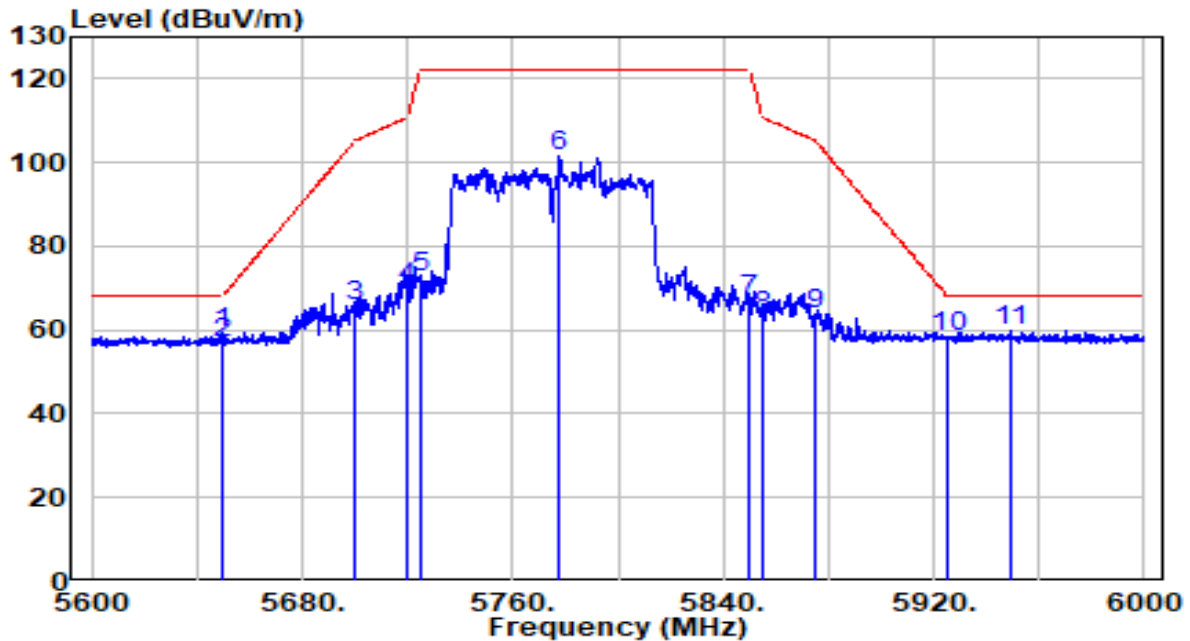


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5649.600	38.45	20.75	59.20	-9.00	68.20	Peak
2	5650.000	36.11	20.76	56.87	-11.33	68.20	Peak
3	5700.000	44.92	20.92	65.84	-39.36	105.20	Peak
4	5720.000	49.23	20.98	70.21	-40.59	110.80	Peak
5	5725.000	51.55	21.00	72.55	-49.65	122.20	Peak
6	5777.600	80.53	21.17	101.70	N/A	N/A	Peak
7	5850.000	45.75	21.40	67.15	-55.05	122.20	Peak
8	5855.000	41.92	21.42	63.34	-47.46	110.80	Peak
9	5875.000	42.33	21.49	63.81	-41.39	105.20	Peak
10	5925.000	36.80	21.65	58.45	-9.75	68.20	Peak
11	* 5949.200	37.91	21.73	59.64	-8.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz - Beamforming Mode	Test Voltage	110V/60Hz

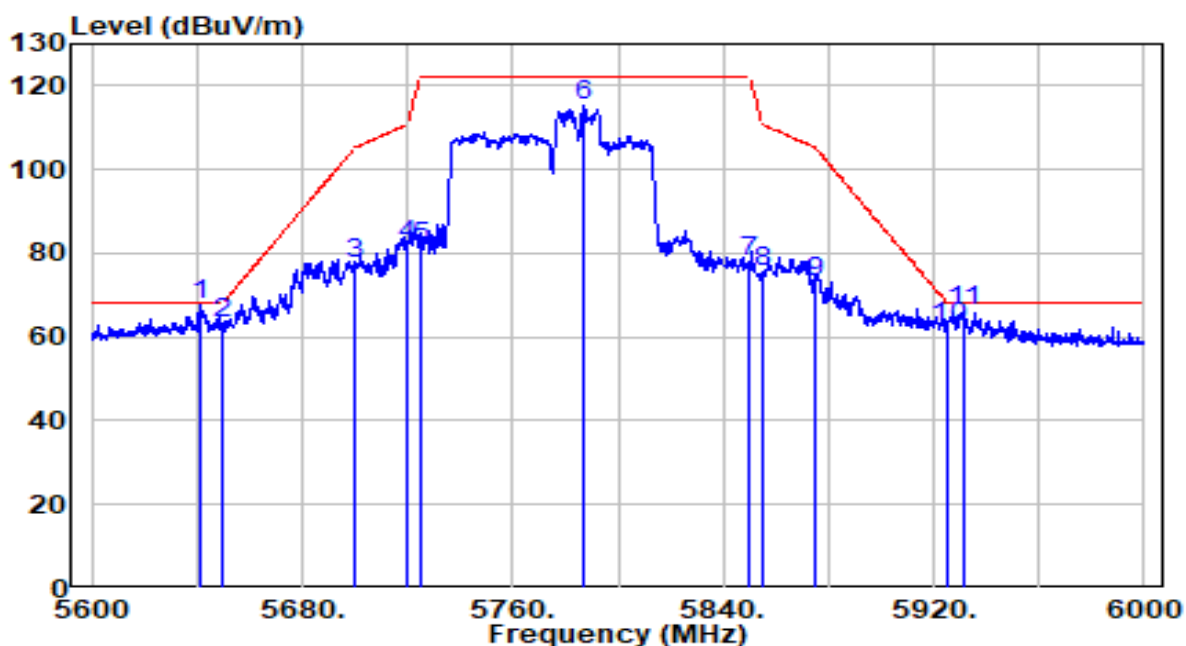


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5640.800	47.21	20.73	67.94	-0.26	68.20	Peak
2		5650.000	42.61	20.76	63.36	-4.84	68.20	Peak
3		5700.000	56.43	20.92	77.35	-27.85	105.20	Peak
4		5720.000	61.07	20.98	82.06	-28.74	110.80	Peak
5		5725.000	60.30	21.00	81.30	-40.90	122.20	Peak
6		5787.200	94.27	21.20	115.47	N/A	N/A	Peak
7		5850.000	56.61	21.40	78.01	-44.19	122.20	Peak
8		5855.000	53.94	21.42	75.36	-35.44	110.80	Peak
9		5875.000	51.62	21.49	73.11	-32.09	105.20	Peak
10		5925.000	40.55	21.65	62.20	-6.00	68.20	Peak
11		5931.400	44.55	21.67	66.22	-1.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

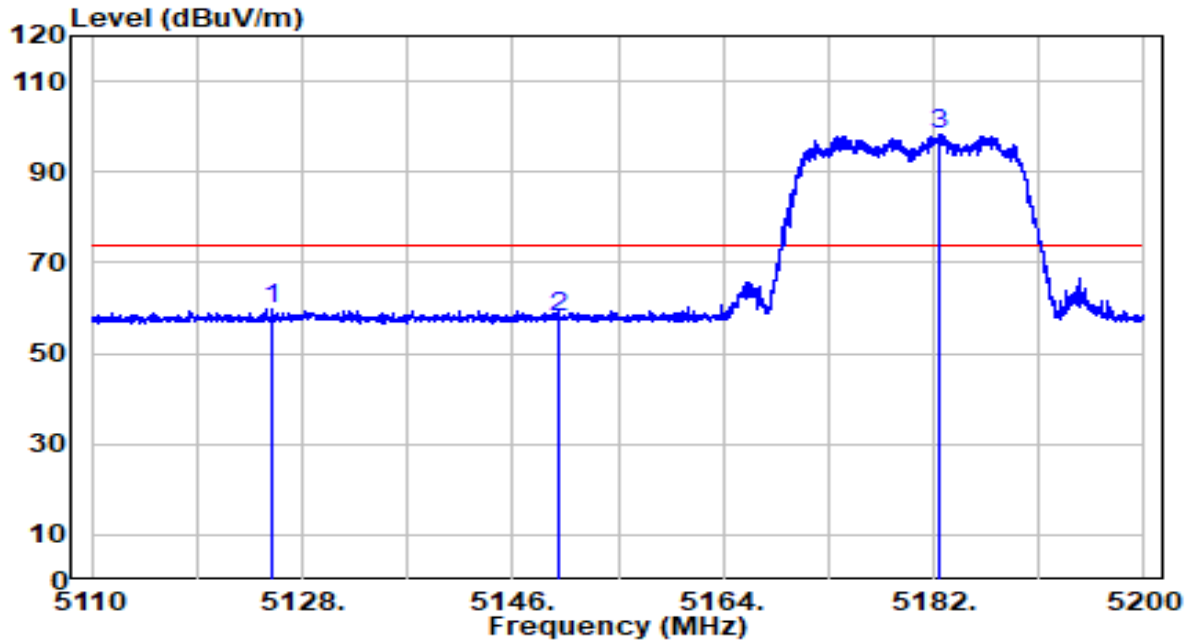


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5125.390	39.91	19.88	59.79	-14.21	74.00	Peak
2	5150.000	38.24	19.91	58.14	-15.86	74.00	Peak
3	* 5182.495	78.17	19.94	98.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

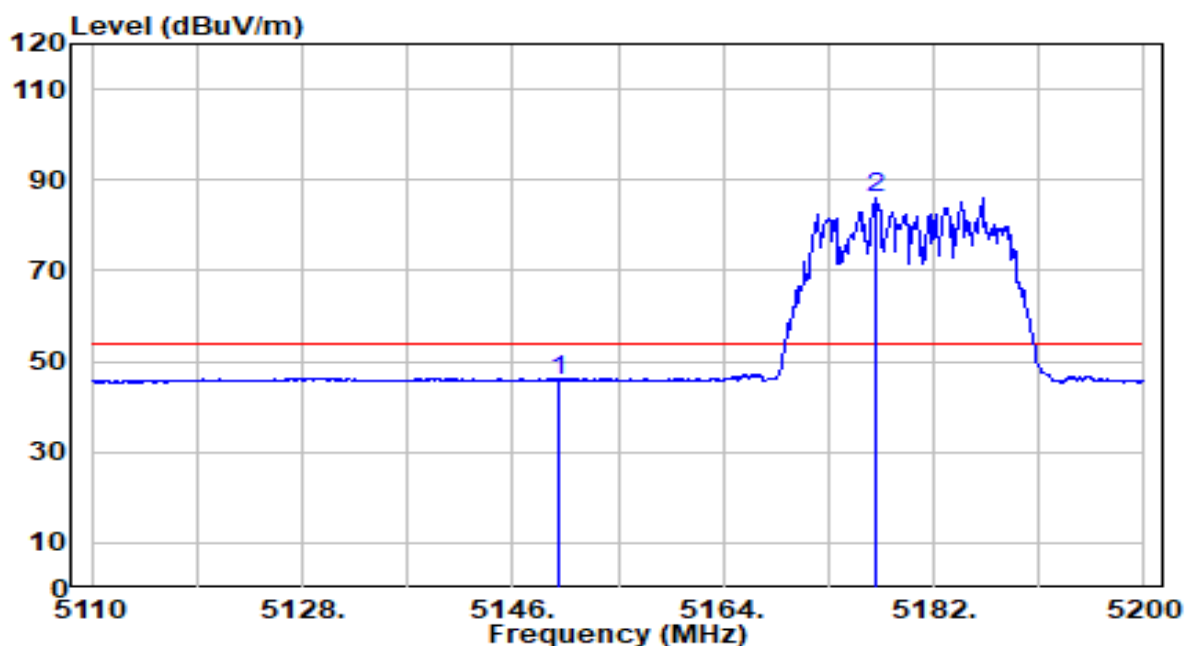


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	25.96	19.91	45.87	-8.13	54.00	Average
2	* 5177.140	66.24	19.93	86.18	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

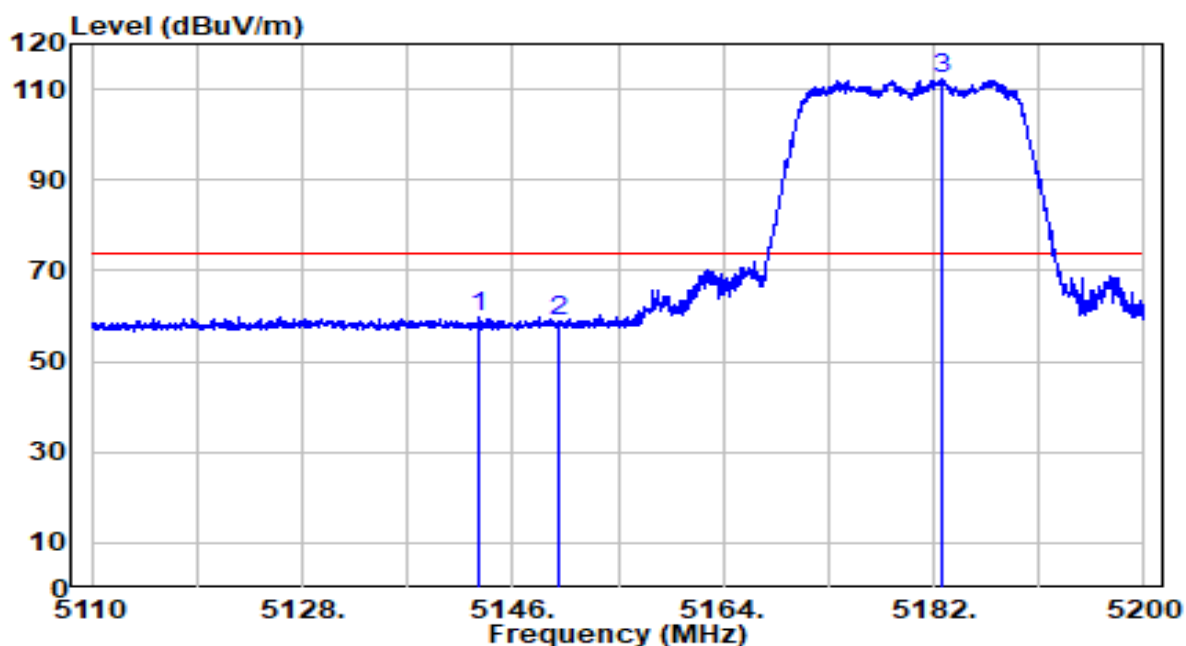


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.075	40.04	19.90	59.94	-14.06	74.00	Peak
2	5150.000	38.99	19.91	58.89	-15.11	74.00	Peak
3	* 5182.765	92.19	19.94	112.13	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz - Beamforming Mode	Test Voltage	110V/60Hz

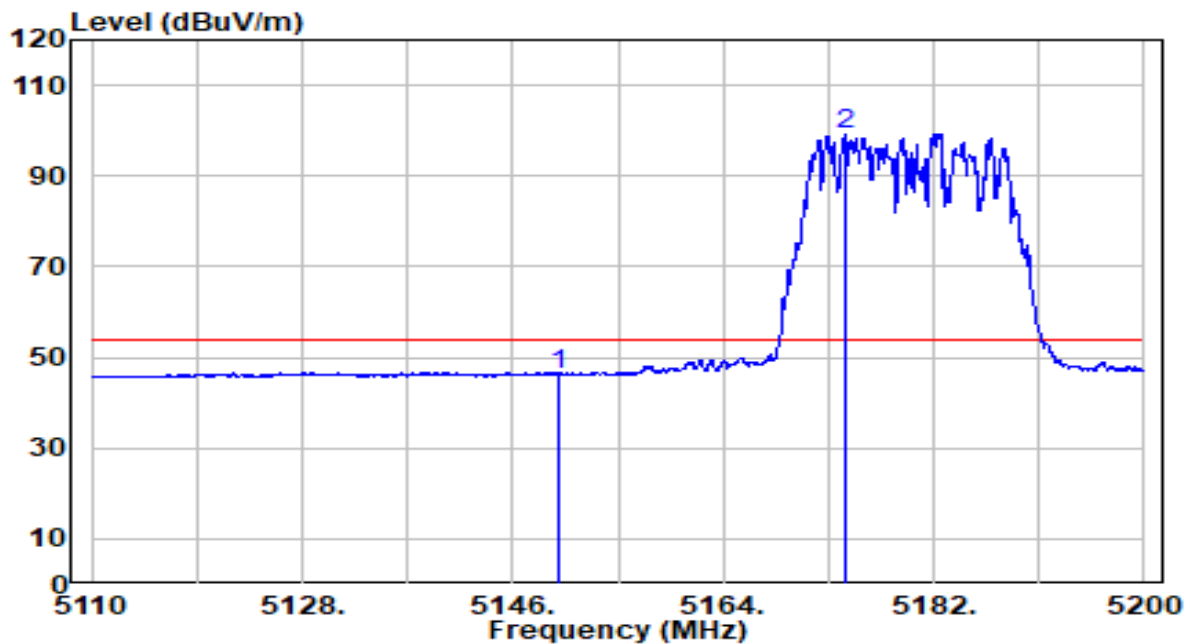


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	26.34	19.91	46.25	-7.75	54.00	Average
2	* 5174.440	79.45	19.93	99.38	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz - Beamforming Mode	Test Voltage	120V/50Hz

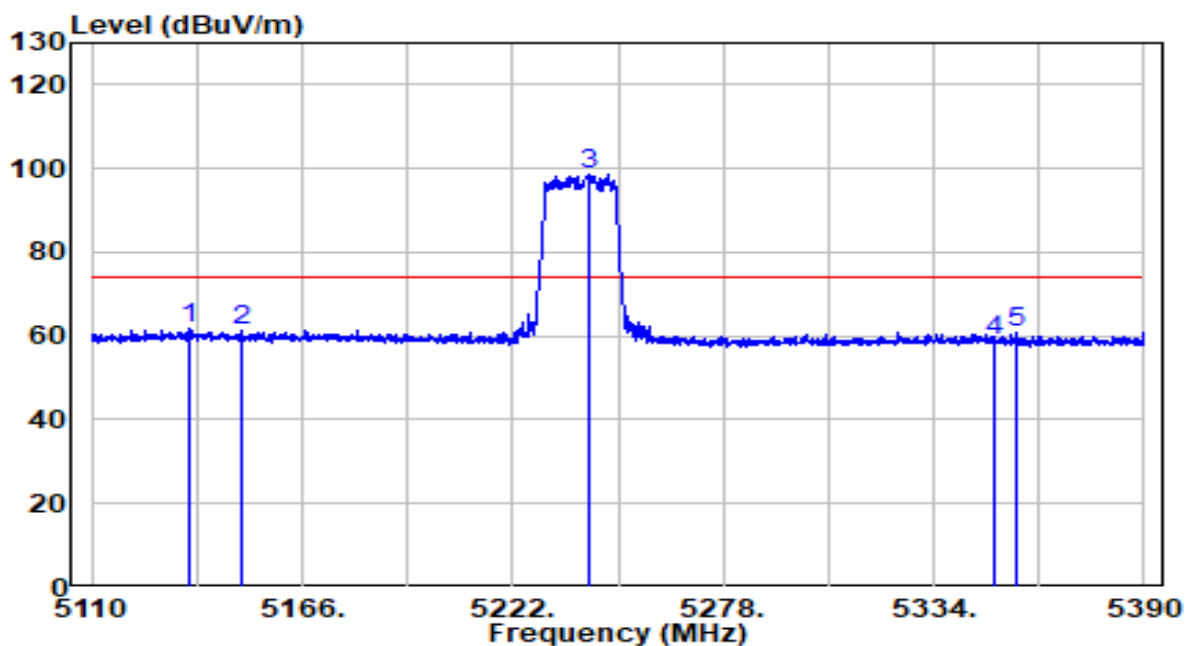


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5135.900	42.00	19.89	61.89	-12.11	74.00	Peak
2	5150.000	41.49	19.91	61.39	-12.61	74.00	Peak
3	* 5242.020	78.64	20.00	98.64	N/A	N/A	Peak
4	5350.000	38.91	20.11	59.03	-14.97	74.00	Peak
5	5355.700	40.57	20.12	60.69	-13.31	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz - Beamforming Mode	Test Voltage	120V/50Hz

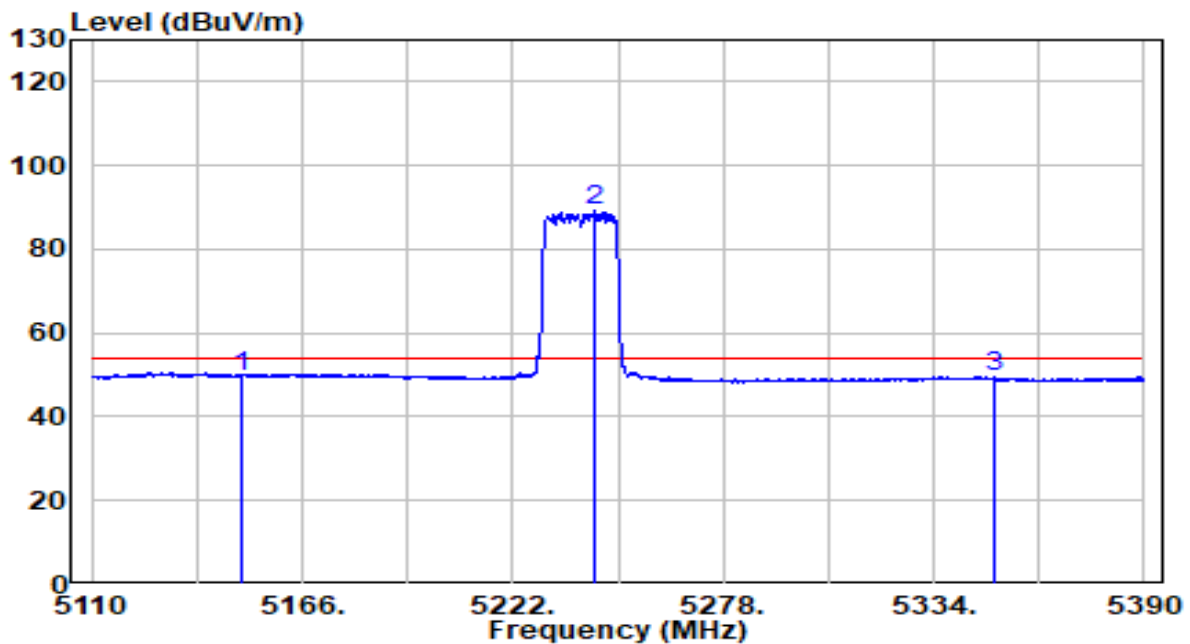


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.86	19.91	49.77	-4.23	54.00	Average
2	* 5243.700	69.39	20.00	89.39	N/A	N/A	Average
3	5350.000	29.25	20.11	49.36	-4.64	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz - Beamforming Mode	Test Voltage	120V/50Hz

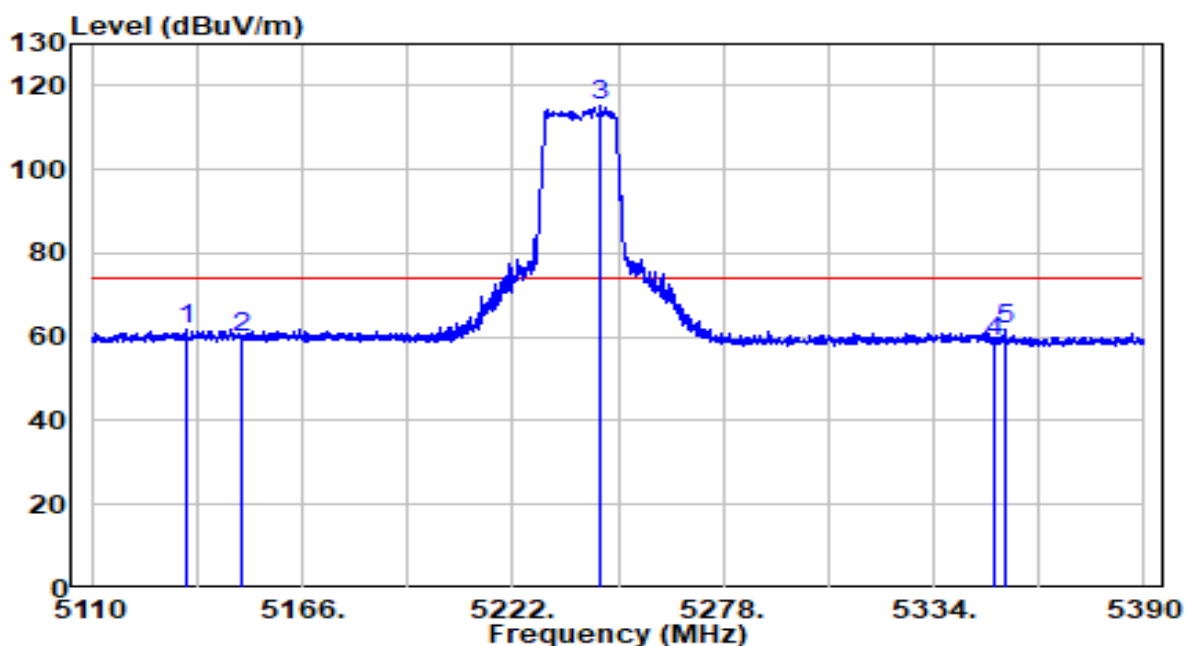


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5135.060	42.02	19.89	61.91	-12.09	74.00	Peak
2	5150.000	39.81	19.91	59.71	-14.29	74.00	Peak
3	* 5245.380	95.11	20.01	115.12	N/A	N/A	Peak
4	5350.000	38.53	20.11	58.64	-15.36	74.00	Peak
5	5353.040	41.85	20.12	61.97	-12.03	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz - Beamforming Mode	Test Voltage	120V/50Hz

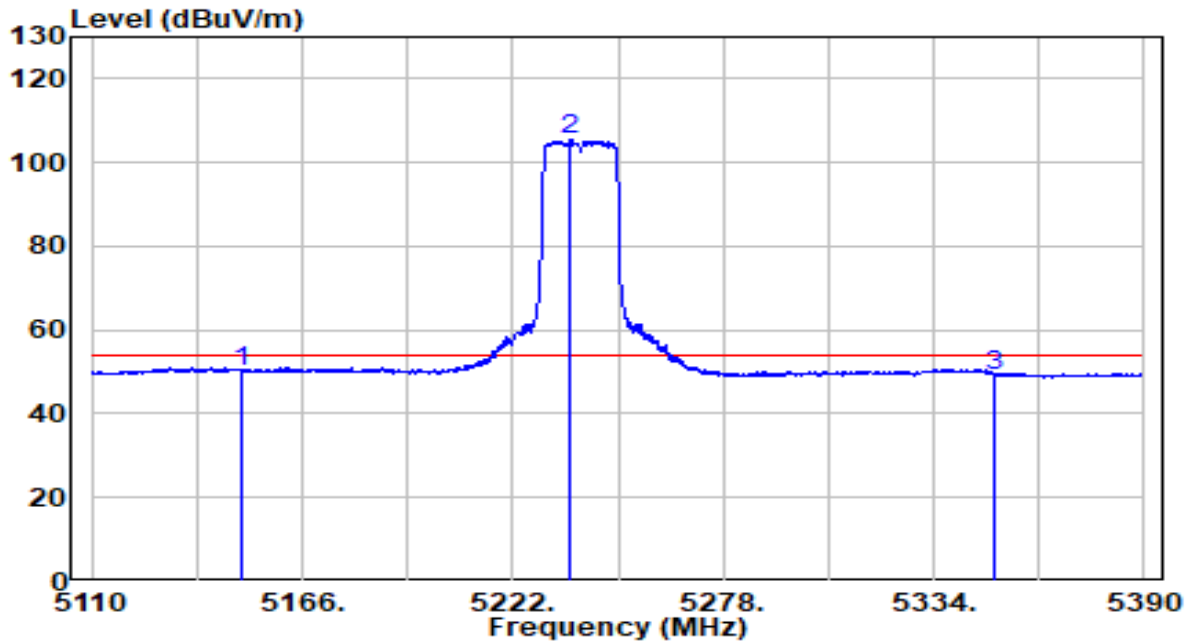


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	30.22	19.91	50.13	-3.87	54.00	Average
2	* 5237.400	85.39	20.00	105.39	N/A	N/A	Average
3	5350.000	29.06	20.11	49.18	-4.82	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz - Beamforming mode	Test Voltage	110V/60Hz

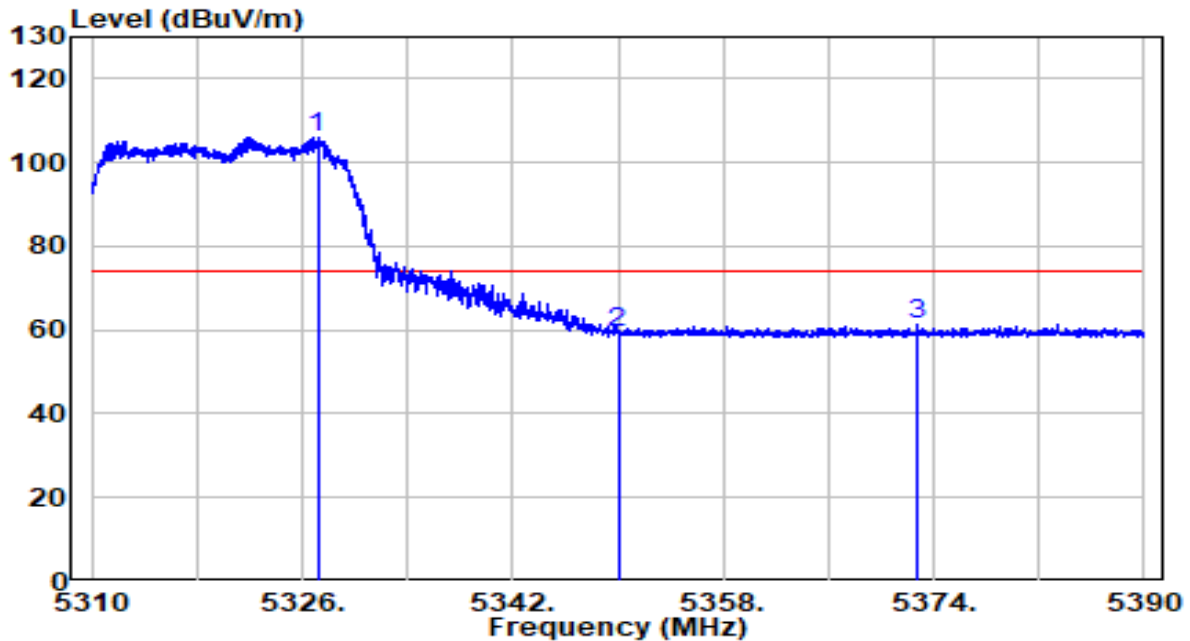

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5327.160	85.93	20.09	106.02	N/A	N/A	Peak
2		5350.000	39.39	20.11	59.51	-14.49	74.00	Peak
3		5372.840	41.01	20.14	61.15	-12.85	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.