

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

TEST REPORT**Report Reference No.****GTS20251202007-1-02**Compiled by
(position+printed name+signature)...

File administrators Peter Xiao

Supervised by
(position+printed name+signature)...

Test Engineer Evan Ouyang

Approved by
(position+printed name+signature)...

Manage Jason Hu

Date of issue

Jan.13, 2026



Test Laboratory Name

Shenzhen Global Test Service Co.,Ltd.

Address

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

Applicant's name**Gogogo technology Co., Limited**

Address

FLAT/RM A, 9/F SILVERCORP INT'L TOWER, 707-713 NATHAN RD, MONGKOK, KL, CHINA

Test specification

Standard

MIC Notice No.88 Appendix No.43 Article 2 Paragraph 1 Item 19 ARIB STD-T66 V3.8

TRF Originator

Shenzhen Global Test Service Co.,Ltd.

Master TRF

Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description**Tablet**

Trade Mark

QAZIPO

Manufacturer

Gogogo technology Co., Limited

Model/Type reference

JPK07

List Model

JPK05,JPK06,JPK08,JPK09,JPK10,JPL05,JPL06,JPL07,JPL08,JPL09,JPL10,JPL11,JPL12,JPL13,PL15,JPL16,JPL17,JPL18,PL19,JPL20,JPE10,JPE11,JPE12,JPE13,JPE15,EZpad Q12 Pro,EZpad V10 Plus

Operation Frequency

From 2402MHz to 2480MHz

Modulation Type

GFSK, $\pi/4$ -DQPSK, 8-DPSK

Hardware version

N/A

Software version

N/A

Ratings

DC 12.0V/3.0A by Adapter

Result

PASS

TEST REPORT

Test Report No. : GTS20251202007-1-02

Jan.13, 2026

Date of issue

Equipment under Test : Tablet

Model /Type : JPK07

Listed model : JPK05,JPK06,JPK08,JPK09,JPK10,JPL05,JPL06,JPL07,JPL08,
JPL09, JPL10, JPL11, JPL12, JPL13, PL15, JPL16, JPL17,
JPL18, PL19,JPL20, JPE10,JPE11,JPE12,JPE13,JPE15,
EZpad Q12 Pro,EZpad V10 Plus

Applicant : Gogogo technology Co., Limited

Address : FLAT/RM A, 9/F SILVERCORP INT'L TOWER, 707-713 NATHAN RD,
MONGKOK, KL, CHINA

Manufacturer : Gogogo technology Co., Limited

Address : FLAT/RM A, 9/F SILVERCORP INT'L TOWER, 707-713 NATHAN RD,
MONGKOK, KL, CHINA

Test Result:

PASS

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. General Description of EUT.....	5
2.3. Equipment Under Test	7
2.4. Table for Parameters of Test Software Setting	7
2.5. Description of Test Modes	7
2.6. EUT configuration	8
2.7. Modifications	8
3. TEST ENVIRONMENT	9
3.1. Address of the test laboratory	9
3.2. Test Facility	9
3.3. Environmental conditions	9
3.4. Test Description	9
3.5. Measurement Uncertainty	10
3.6. Measurement Instruments List	10
4. TEST CONDITIONS AND RESULTS	11
4.1. Frequency Error	11
4.2. Antenna Output Power and Output Power Tolerance.....	12
4.3. Occupied Bandwidth and Spreading Bandwidth	14
4.4. Dwell time	15
4.5. Unwanted Emission Strength	16
4.6. Secondary Radiated Emission Strength.....	17
4.7. Construction protection method.....	18
4.8. Interference Prevention Function	18
4.9. Number of Carriers	18
5. TEST SETUP PHOTOS OF THE EUT	19
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....	19

1. TEST STANDARDS

The tests were performed according to following standards:

[MIC Notice No.88 Appendix No.43 Article 2 Paragraph 1 Item 19](#)

[ARIB STD-T66 V3.8](#)

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Dec.19, 2025
Testing commenced on	:	Dec.19, 2025
Testing concluded on	:	Jan.12, 2026

2.2. General Description of EUT

Product Name:	Tablet
Trade Mark:	QAZIPO
Model/Type reference:	JPK07
List Model:	JPK05,JPK06,JPK08,JPK09,JPK10,JPL05,JPL06,JPL07,JPL08,JPL09,JPL10,JPL11,JPL12,JPL13,PL15,JPL16,JPL17,JPL18,PL19,JPL20,JPE10,JPE11,JPE12,JPE13,JPE15,EZpad Q12 Pro,EZpad V10 Plus
Model Declaration	PCB board, structure and internal of these model(s) are the same, Only the model name different, So no additional models were tested.
Power supply:	DC 12.0V/3.0A by Adapter
BT	
Operation frequency	2402MHz ~ 2480MHz
Channel Number	79 channels for Bluetooth (BDR/EDR) 40 channels for Bluetooth (BT LE)
Channel Spacing	1MHz for Bluetooth (BDR/EDR) 2MHz for Bluetooth (BT LE)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth (BDR/EDR) GFSK for Bluetooth (BT LE)
2.4GWLAN	
WLAN Operation frequency	IEEE 802.11b:2412-2472MHz IEEE 802.11g:2412-2472MHz IEEE 802.11n HT20:2412-2472MHz IEEE 802.11n HT40:2422-2462MHz
WLAN Modulation Type	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel number:	13 Channel for IEEE 802.11b/g/n (HT20) 9 Channel for IEEE 802.11n (HT40)
Channel separation:	5MHz
WIFI (5G Band)	
Operation frequency	5180-5240MHz
Modulation Type	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK)

	IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT20: OFDM (256QAM,64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT40: OFDM (256QAM,64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT80: OFDM (256QAM,64QAM,16QAM, QPSK, BPSK)
Channel number	4 Channels for 20MHz bandwidth(5180-5240MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Antenna Description	Two PIFA antennas; WLAN not support 2*2MIMO technology ANT1 used for Bluetooth &WIFI TX/RX, 1.28 dBi(Max.) for 2.4G Band and 2.27 dBi(Max.) for 5G Band ANT2 used for WIFI TX/RX, 0.02 dBi(Max.) for 2.4G Band and 1.48 dBi(Max.) for 5G Band

Note: For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 120V / 60 Hz	☐ 230V / 50Hz
		☒ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

DC 12.0V

2.4. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters:

Test Software Version	setup.exe		
Frequency	2402MHz	2441MHz	2480MHz
Bluetooth	Default	Default	Default

2.5. Description of Test Modes

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: Test performed at the lowest/middle/highest frequencies selected in the list above for EUT supported while working on specified mode.

Summary of measurement results

EUT and Module Power tables			
EUT Setup Value(Vdc)	Normal	High(+10%)	Low(-10%)
	12.0	13.2	10.8
Module Vdd Power Measurement Value(Vdc)	Normal	High(+10%)	Low(-10%)
	3.303	3.306	3.297
Voltage error(%)	Result	Ref.level	0.09
	Limit	±1	
Judgment		pass	pass

NOTE: The module integrates a voltage regulator circuit to ensure that the input voltage (VCC) of the RF module is stable declared by IC manufacturer.

2.6. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

●	Adapter	Length (m) :	1.0m
		Shield :	Non-Shielded
		Detachable :	No

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1401.

FCC Registered Test Site Number is 684561.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature: 25 °C

High Temperature: 55 °C

Low Temperature: -20 °C

Normal Voltage : DC 12.0V

High Voltage:DC 13.2V

Low Voltage:DC 10.8V

Relative Humidity: 55 %

Air Pressure: 989 hPa

3.4. Test Description

MIC Notice No.88 Appendix No.43 Article 2 Paragraph 1 Item 19		
Clause	Description of Test (Transmitter Parameters)	Result
6	Antenna Power	PASS
6	Tolerances for Antenna Power	PASS
3	Frequency Tolerance	PASS
4	Transmission Rate	PASS
4	Occupied Frequency Bandwidth	PASS
4	Spread Bandwidth	PASS
13	Dwell Time	PASS
5	Spurious Emissions	PASS
10	Transmission Antenna Gain (EIRP Antenna Power)	PASS
11	Transmission Radiated Angle Width (3dB Beam width)	N/A
12	Interference prevention function	PASS
8	Carrier Sensing function	N/A
Receiver Parameters		
7	Secondary Radiated Emissions	PASS
N/A is an abbreviation for Not Applicable.		

3.5. Measurement Uncertainty

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR100028-1 [2] and shall correspond to an expansion factor (coverage factor) $K=1.96$ or $K=2$ (which provide confidence levels of respectively 95% and 95.5% in the case where the distributions characterizing the actual measurement uncertainties are normal).

Parameter	Uncertainty
Frequency error / 99%&90% bandwidth	$\pm 1.62 \times 10^{-6}$
Total RF power, conducted	$\pm 0.8\text{dB}$
Spurious emissions, conducted	$\pm 0.8\text{dB}$
DC and low frequency voltages	$\pm 0.05\%$
Humidity	$\pm 5\%$
Temperature	$\pm 1^\circ\text{C}$

3.6. Measurement Instruments List

Item	Test Equipment	Manufacturer	Model No.	Serial No	Last Cal.
1	Spectrum Analyzer	Agilent	N9020A	MY48010425	2025/07/04
2	RF Cable	H&S	GTS-C008	---	2025/07/15
3	DC Power Supply	ITECH	IT6302	600071010727010049	2025/07/04
4	Oscilloscope	Tektronix	TDS3012	B035361	2025/07/15
5	Signal generator	Agilent	N5182A	MY50141550	2025/07/04
6	Power meter	Keysight	E4419B	GB39290521	2025/07/07
7	Power Sensor	Keysight	E9301A	MY41495308	2025/07/04

Note 1: The validity of measurement equipment is one year from the first day of the following month of the calibration date. (e.g. If the calibration date is July 15th, 2024, measurement equipment can be used from July 15th, 2024 to July 14th, 2025.)

Note 2: Calibration Method

Calibration conducted by the SMICOM or designated calibration agency under Article 102-18 paragraph (1)

Correcting mechanism: Bay Area Metrology Services Co.,Ltd

4. TEST CONDITIONS AND RESULTS

4.1. Frequency Error

LIMIT

50ppm

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: non-modulation

Spectrum Condition:

- Frequency: test frequency
- Span: 3MHz
- RBW: 10KHz
- VBW: 10 KHz
- Sweep time: Auto
- Detector mode: Positive peak
- Indication mode: max hold

TEST RESULTS

For reporting purpose only.

Please refer to Appendix B.1.

4.2. Antenna Output Power and Output Power Tolerance

LIMIT

- $\leq 3 \text{ mW /MHz}$ (FHSS from 2402-2480 MHz)


The Output Power Tolerance must be $\leq 20\%$.

E.i.r.p:

- $\leq 6.91 \text{ dBm/MHz}$ (FHSS form 2400-2483.5MHz)

Note: E.I.R.P will not be applied to the transmission antenna which has a gain of 2.14dBi or less.

TEST CONFIGURATION

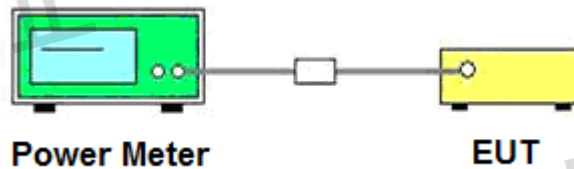

TEST PROCEDURE

- EUT have transmitted continuous maximum power
- Antenna Power Error is definition that actual measure antenna power tolerance $\leq 20\%$ power range that base on manufacturer declare the conducted power density.
- The EUT was programmed to be in continuously transmitting mode.

TEST RESULTS


Modulation type	mode	Average burst power (dBm)	Duty cycle	Spread Bandwidth (MHz)	Output power (mW/MHz)	Limit (mW/MHz)	Rated output power (mW/MHz)	Tolerance (%)	Limit	Result
GFSK	Hopping	3.67	1.0	70.053	0.03	3	0.10	-70.00	≤+20 %	Pass
π/4-DQPSK	Hopping	4.63	1.0	70.369	0.04	3	0.10	-60.00		
8-DPSK	Hopping	5.40	1.0	70.531	0.05	3	0.10	-50.00		

Remark:

Output power= Average value / (Duty Cycle * Spreading bandwidth)

Duty cycle=100%

Duty cycle= [Ton/ (Ton+Toff)]*100%=30.4/30.4*100%=100%

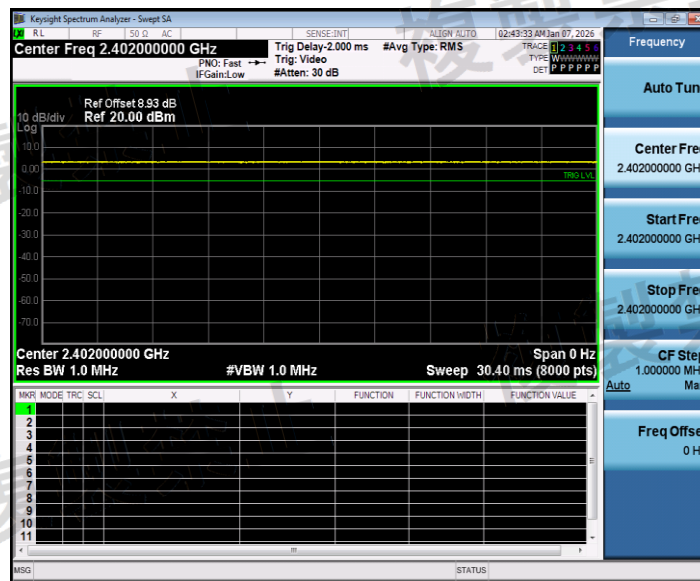

Test Result of EIRP					
Mode	mode	Conducted test Power(mW/MHz)	Antenna gain	Measured EIRP Value(dBm/MHz)	Limit (dBm/MHz)
GFSK	Hopping	0.03	1.28	-13.95	6.91
π/4-DQPSK	Hopping	0.04	1.28	-12.70	6.91
8-DPSK	Hopping	0.05	1.28	-11.73	6.91

Note: Declared E.I.R.P= Conduced test Power+ Antenna gain

4.3. Occupied Bandwidth and Spreading Bandwidth

LIMIT

- Occupied bandwidth: $FH \leq 83.5$ MHz;

TEST CONFIGURATION



TEST PROCEDURE

1. Setting of SA is following as fellow:
 - RBW: under 3% of OBW
 - VBW: = RBW
 - Sweep time: Auto
 - Sweep Mode: Continuous sweep
 - Detect mode: Positive peak
 - Trace mode: Max hold
2. EUT have transmitted the maximum modulation signal and fixed channelize. SA set to 99% of occupied bandwidth to measure occupied bandwidth.
3. EUT have transmitted the maximum modulation signal and fixed channelize. SA set to 90% of occupied bandwidth to measure spread bandwidth.
4. Spread Factor=Spread Bandwidth/modulation rate. The modulation rate: MR=1Mbps (declare by client)

TEST RESULTS

For reporting purpose only.

Please refer to Appendix B.2.

Please refer to Appendix B.3.

Note: Spread Factor=Spread Bandwidth/modulation rate.


4.4. Dwell time

LIMIT

0.4 second or less

NOTE: Dwell time only applicable to HFSS system device.

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

- Frequency: test channel
- Span=0MHz
- RBW: 1MHz&510KHz
- VBW: 3MHz
- Sweep time: Auto
- Detector mode: Positive peak

TEST RESULTS

For reporting purpose only.

Please refer to Appendix B.6.

Remark: Dwell time= transmission time of 1 burst* Total Hops*1000

4.5. Unwanted Emission Strength

LIMIT


Below 2387 MHz: 2.5 μ W/MHz or less

2387 to 2400 MHz: 25 μ W/MHz or less

2483.5 Through 2496.5 MHz: 25 μ W/MHz or less

Over 2496.5 MHz: 2.5 μ W/MHz or less

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

- Frequency: 30MHz-13GHz
- RBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)
- VBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)
- Sweep time: Auto
- Detector mode: Positive average
- Indication mode: max hold

NOTE:30~1000MHz,limit is 2.5uW/MHz=-26dBm/MHz=-36dBm/100KHz

TEST RESULTS

For reporting purpose only.

Please refer to Appendix B.4.


4.6. Secondary Radiated Emission Strength

LIMIT

Below 1GHz: 4.0nW or less

Above 1GHz: 20nW or less

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

- Frequency: 30MHz-13GHz
- RBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)
- VBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)
- Sweep time: Auto
- Detector mode: Positive average
- Indication mode: max hold

TEST RESULTS

For reporting purpose only.

Please refer to Appendix B.5.

4.7. Construction protection method

Requirement

The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily

Confirmation method

Protected Method	Metal Cover Shielded
Description	shielding case are metal cover at the RF Modular to protect anybody to remove it easily.

4.8. Interference Prevention Function

Requirement

Clarify the one automatically to transmit and to receive identification code with the wireless equipment of the wireless station used in the same premises.

Interference Prevention Function Confirm

A communication link was made where the ID code is correct (Identical).

TEST PROCEDURE

1. Connect the EUT in network
2. Open the software
3. We can get the information as follows:

TEST RESULTS

The radio equipment has an identification code. A verification of this code is done before a communication channel is established.

MAC Address: A14235EBCCEE

4.9. Number of Carriers

LIMIT

The number of Carriers: 1 or more/MHz

TEST RESULTS

N/A

5. TEST SETUP PHOTOS OF THE EUT

Reference to the test report No. GTS20251202007-1-01.

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the test report No. GTS20251202007-1-01.

*****THE END*****