


Site: AC1	Time: 2017/08/20 - 14:44
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

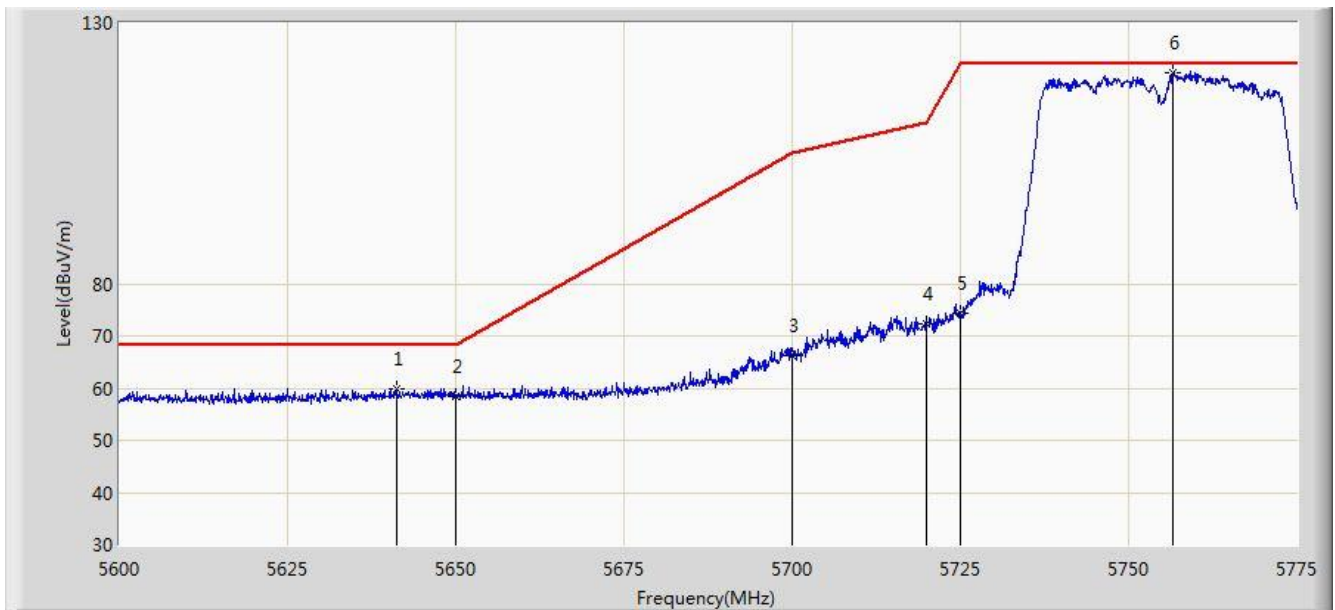


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.125	59.989	55.348	-8.211	68.200	4.641	PK
2			5650.000	58.404	53.733	-9.796	68.200	4.671	PK
3			5700.000	66.246	61.368	-38.954	105.200	4.878	PK
4			5720.000	72.304	67.307	-38.496	110.800	4.997	PK
5			5725.000	74.235	69.206	-47.965	122.200	5.029	PK
6		*	5756.538	120.543	115.323	N/A	N/A	5.220	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 14:53
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

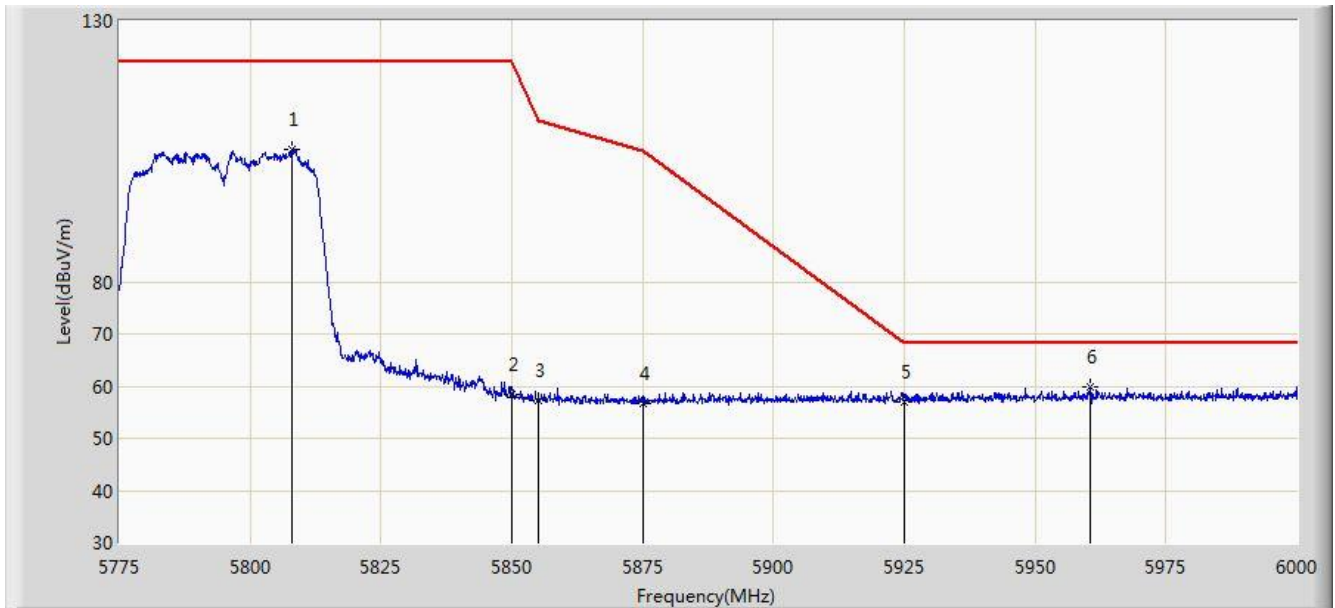


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5807.962	105.327	99.838	N/A	N/A	5.489	PK
2			5850.000	58.408	52.682	-63.792	122.200	5.726	PK
3			5855.000	57.269	51.523	-53.531	110.800	5.746	PK
4			5875.000	56.691	50.871	-48.509	105.200	5.820	PK
5			5925.000	56.978	51.012	-11.222	68.200	5.967	PK
6		*	5960.625	59.993	53.948	-8.207	68.200	6.045	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 15:02
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

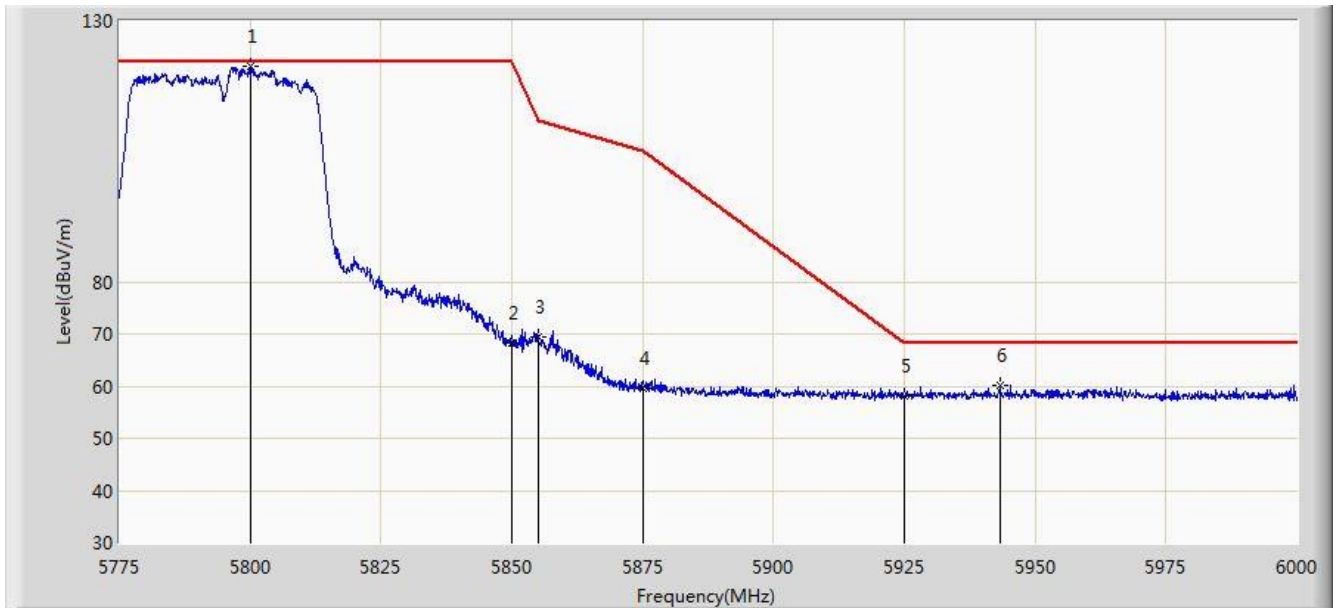


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5800.087	121.326	115.880	N/A	N/A	5.445	PK
2			5850.000	68.349	62.623	-53.851	122.200	5.726	PK
3			5855.000	69.538	63.792	-41.262	110.800	5.746	PK
4			5875.000	59.531	53.711	-45.669	105.200	5.820	PK
5			5925.000	58.060	52.094	-10.140	68.200	5.967	PK
6			5943.187	60.183	54.172	-8.017	68.200	6.011	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 15:10
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

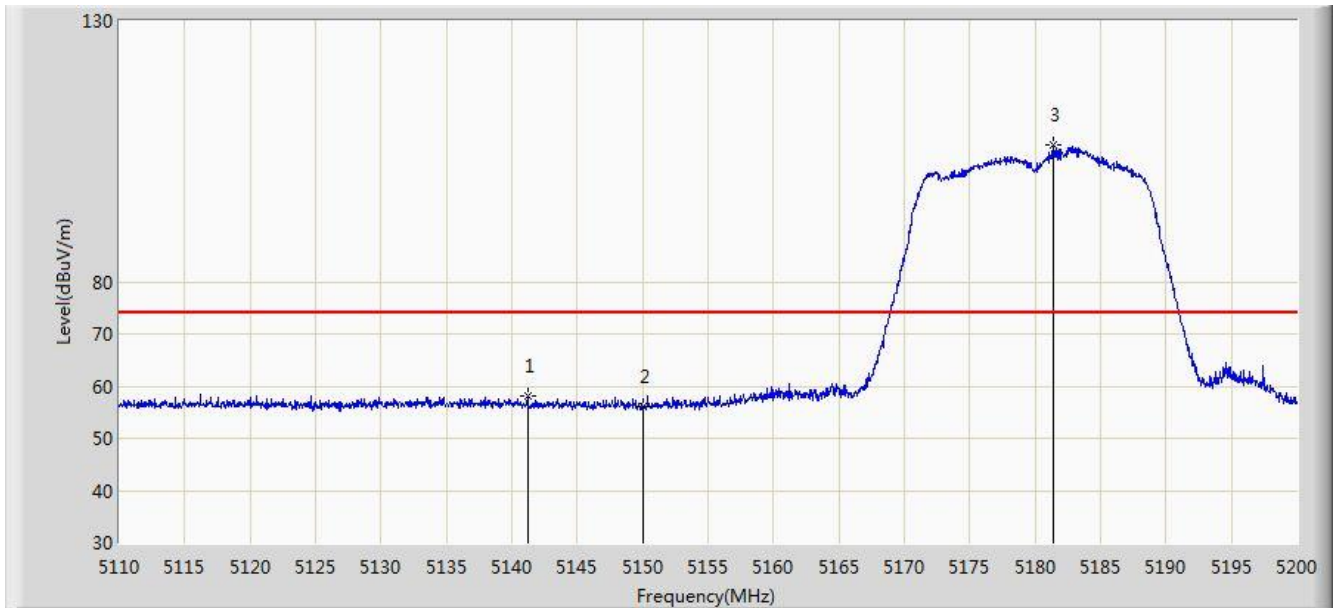


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.230	58.235	54.059	-15.765	74.000	4.175	PK
2			5150.000	56.036	51.867	-17.964	74.000	4.170	PK
3		*	5181.415	106.354	102.290	N/A	N/A	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 15:11
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

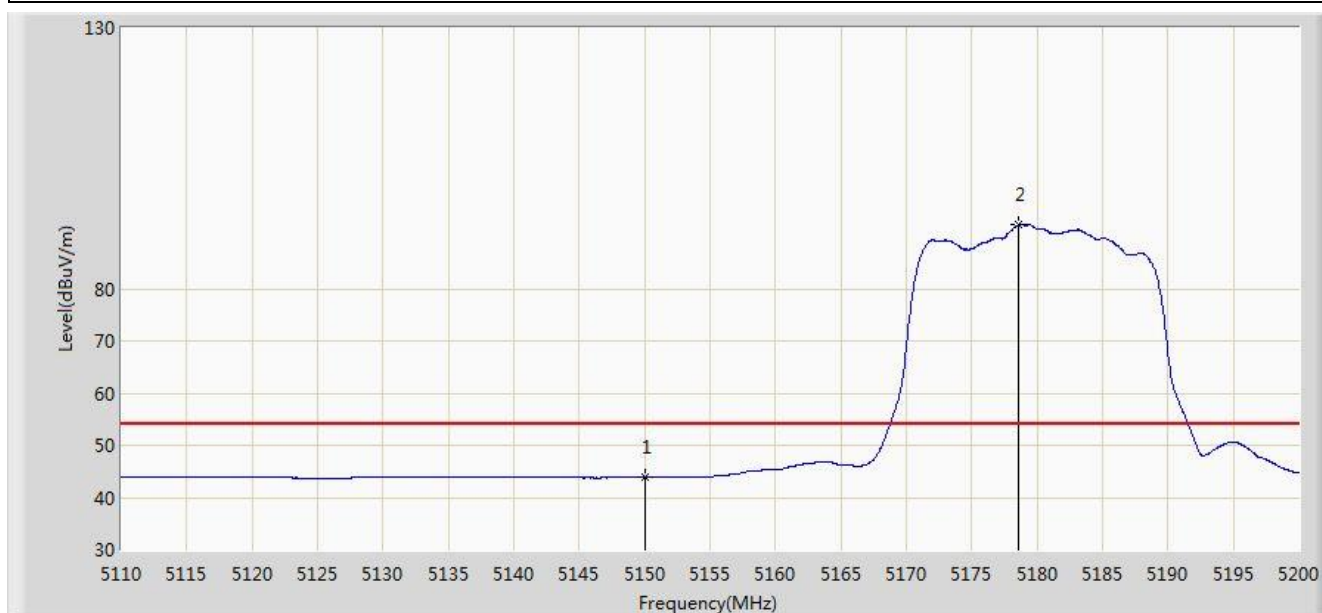


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	43.839	39.670	-10.161	54.000	4.170	AV
2		*	5178.580	92.229	88.155	N/A	N/A	4.074	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 15:07
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

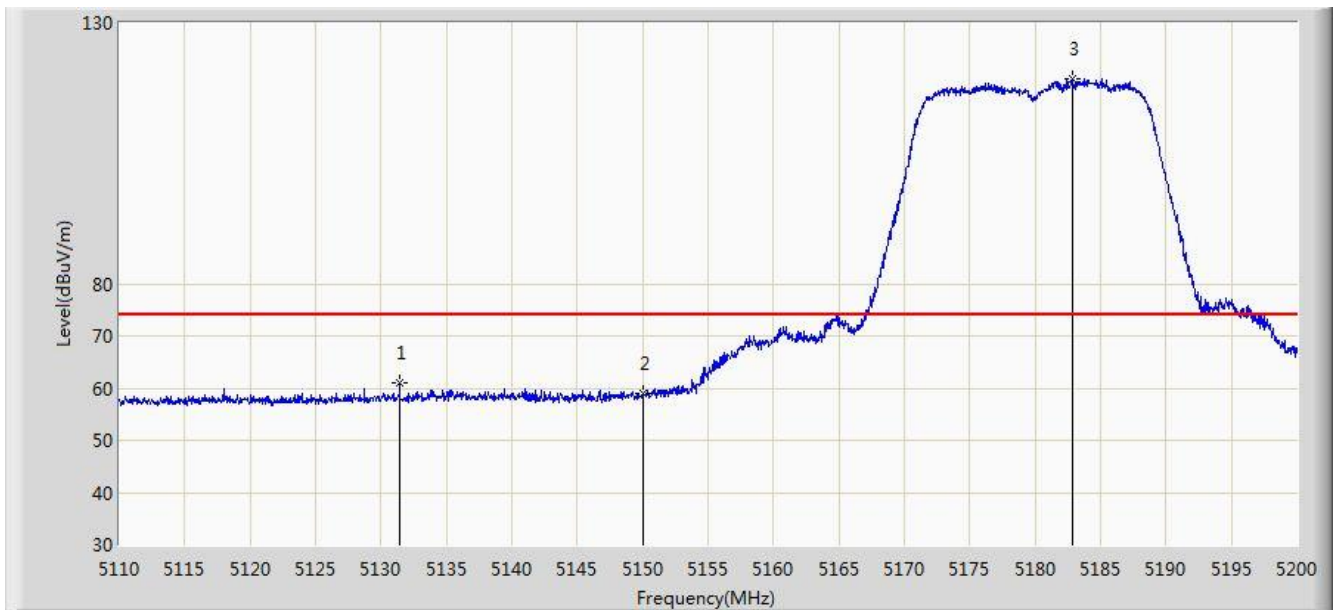


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.420	60.963	56.788	-13.037	74.000	4.175	PK
2			5150.000	59.022	54.853	-14.978	74.000	4.170	PK
3		*	5182.810	119.299	115.240	N/A	N/A	4.059	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 15:08
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

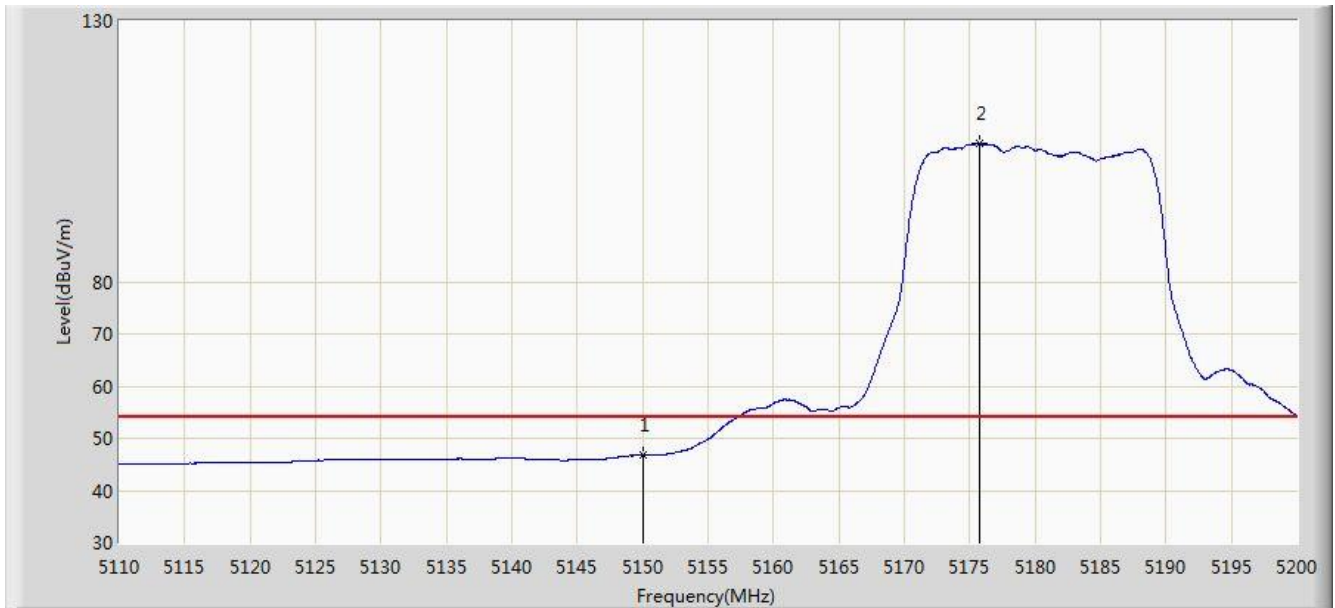


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.792	42.623	-7.208	54.000	4.170	AV
2		*	5175.745	106.499	102.415	N/A	N/A	4.084	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 15:37
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

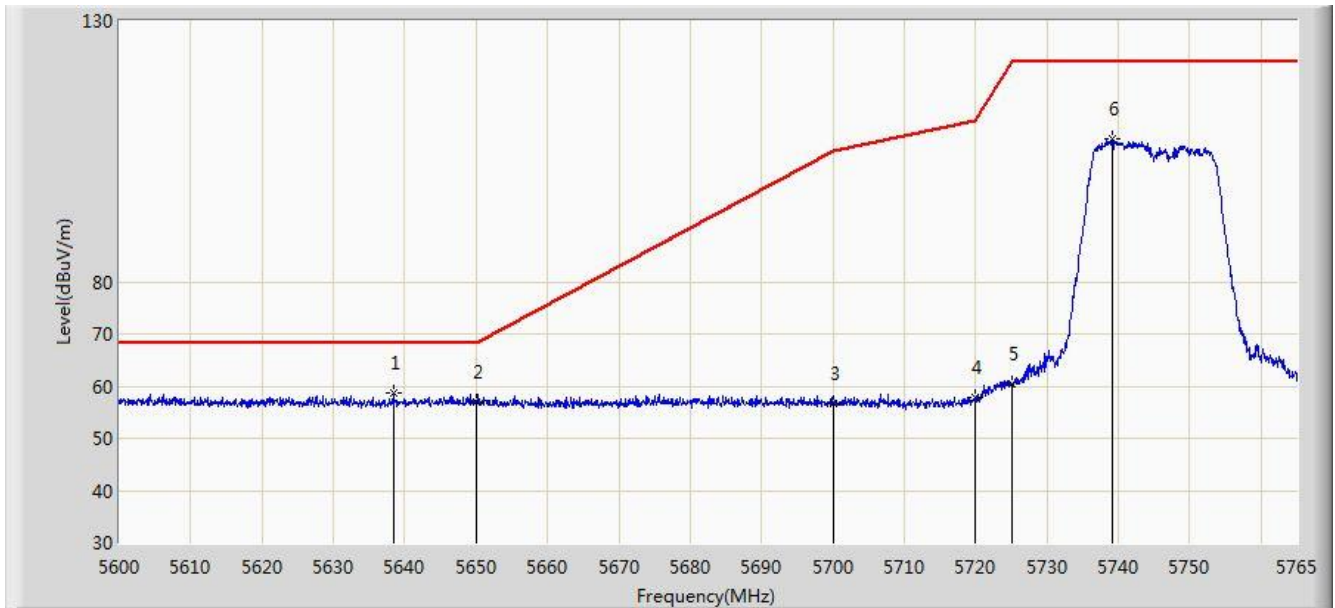


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5638.362	58.631	53.998	-9.569	68.200	4.633	PK
2			5650.000	56.987	52.316	-11.213	68.200	4.671	PK
3			5700.000	56.595	51.717	-48.605	105.200	4.878	PK
4			5720.000	57.698	52.701	-53.102	110.800	4.997	PK
5			5725.000	60.534	55.505	-61.666	122.200	5.029	PK
6			5739.095	107.269	102.150	N/A	N/A	5.119	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 15:41
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

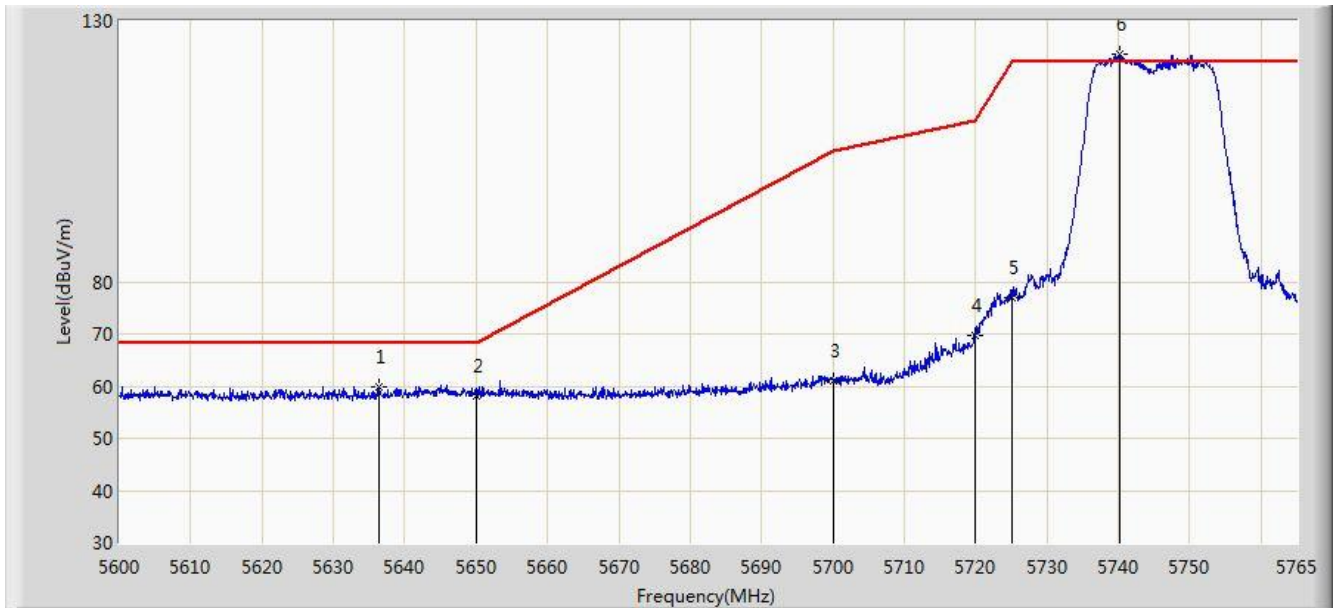


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5636.382	59.984	55.357	-8.216	68.200	4.627	PK
2			5650.000	58.189	53.518	-10.011	68.200	4.671	PK
3			5700.000	61.150	56.272	-44.050	105.200	4.878	PK
4			5720.000	69.701	64.704	-41.099	110.800	4.997	PK
5			5725.000	77.031	72.002	-45.169	122.200	5.029	PK
6		*	5740.250	123.583	118.457	N/A	N/A	5.127	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 15:44
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

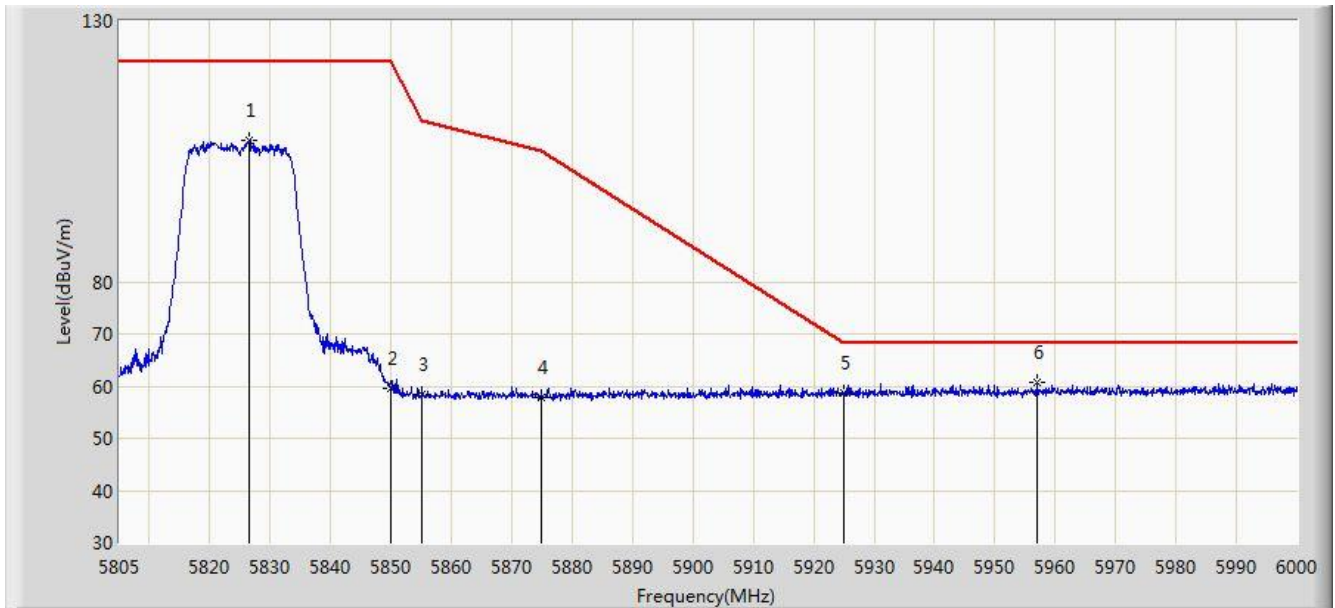


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5826.547	107.226	101.629	N/A	N/A	5.596	PK
2			5850.000	59.490	53.764	-62.710	122.200	5.726	PK
3			5855.000	58.282	52.536	-52.518	110.800	5.746	PK
4			5875.000	57.708	51.888	-47.492	105.200	5.820	PK
5			5925.000	58.707	52.741	-9.493	68.200	5.967	PK
6		*	5956.905	60.716	54.678	-7.484	68.200	6.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 15:49
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

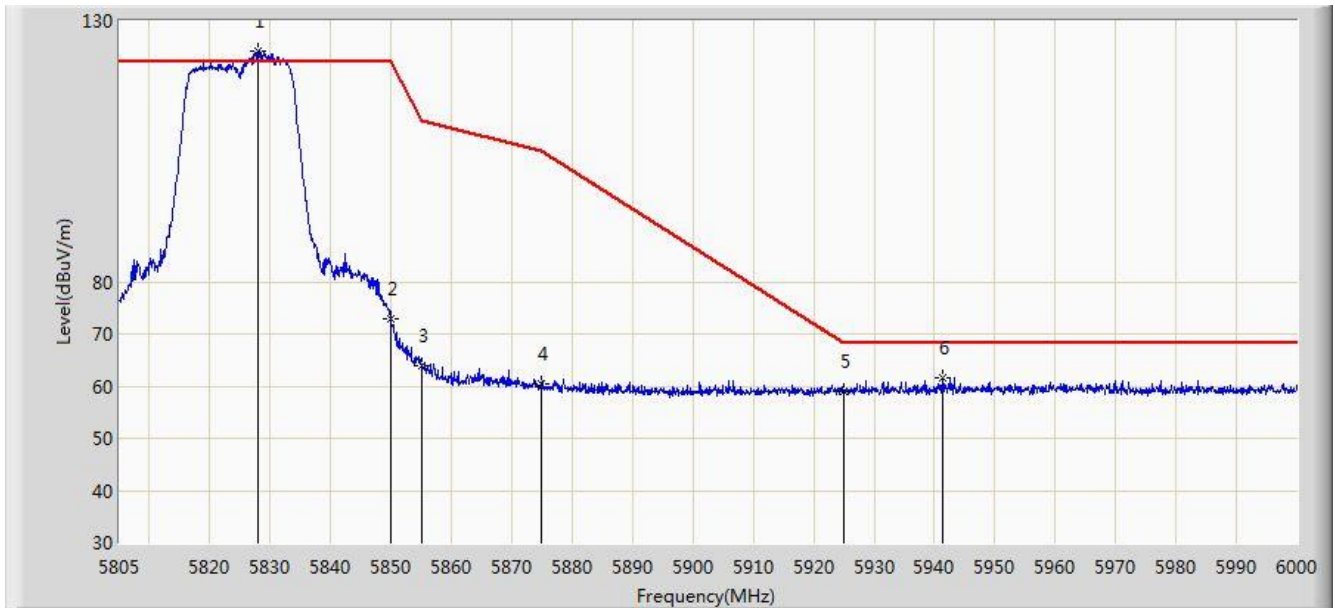


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.010	124.177	118.571	N/A	N/A	5.606	PK
2			5850.000	72.755	67.029	-49.445	122.200	5.726	PK
3			5855.000	63.828	58.082	-46.972	110.800	5.746	PK
4			5875.000	60.390	54.570	-44.810	105.200	5.820	PK
5			5925.000	59.127	53.161	-9.073	68.200	5.967	PK
6			5941.402	61.606	55.599	-6.594	68.200	6.007	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 16:02
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

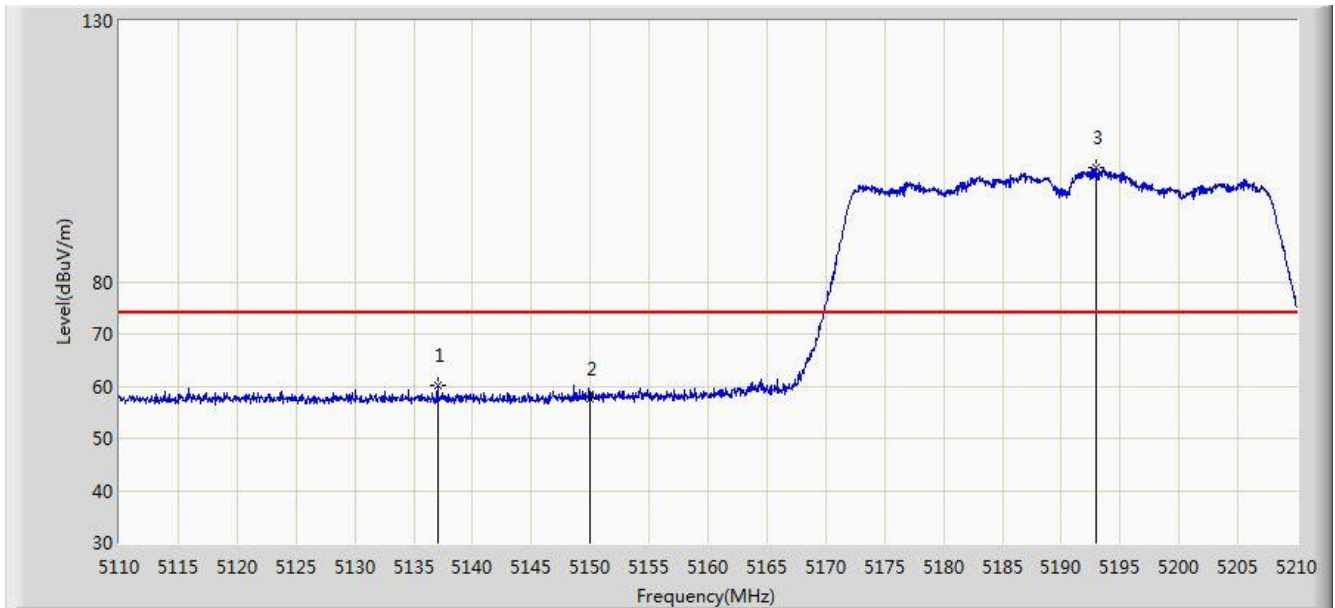


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.050	60.237	56.062	-13.763	74.000	4.175	PK
2			5150.000	57.589	53.420	-16.411	74.000	4.170	PK
3		*	5192.900	101.922	97.899	N/A	N/A	4.023	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 16:03
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

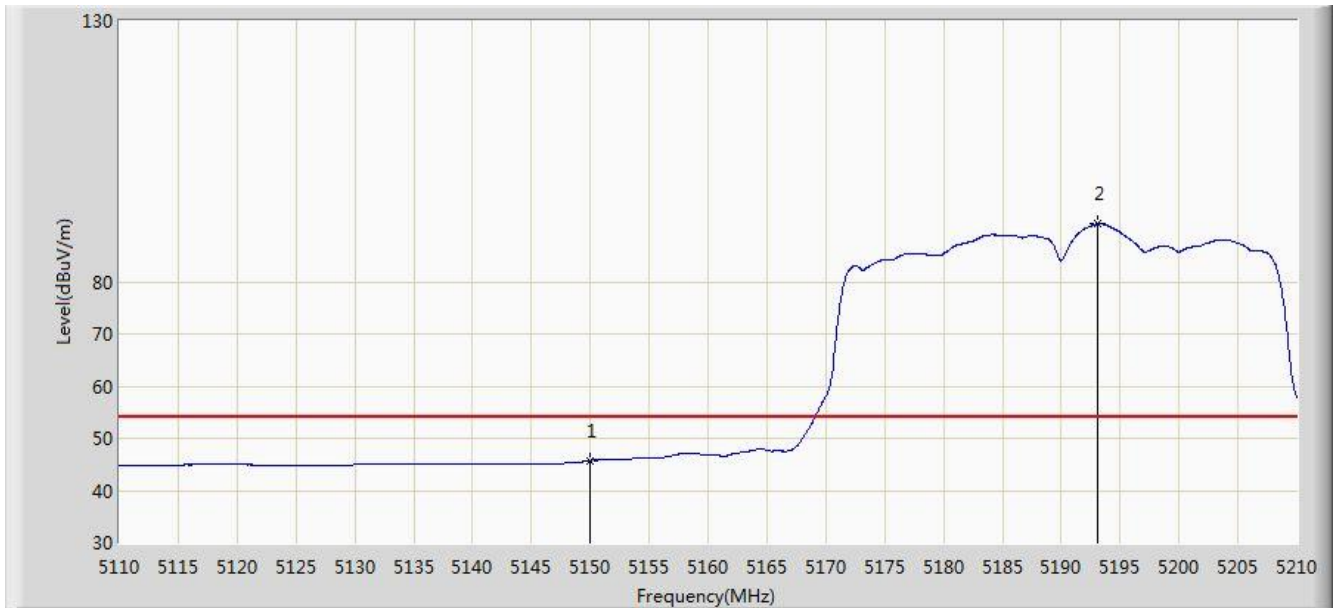


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.731	41.562	-8.269	54.000	4.170	AV
2		*	5193.100	91.031	87.009	N/A	N/A	4.023	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 16:00
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

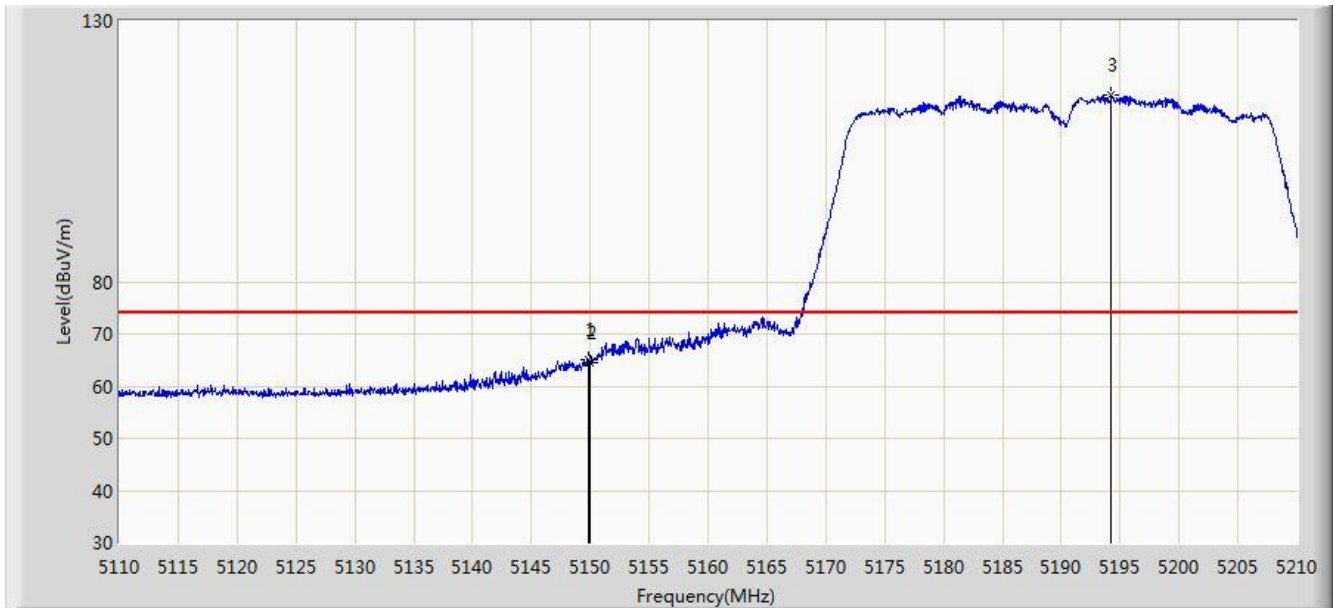


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.850	65.186	61.016	-8.814	74.000	4.170	PK
2			5150.000	64.470	60.301	-9.530	74.000	4.170	PK
3		*	5194.200	115.820	111.801	N/A	N/A	4.018	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 15:58
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

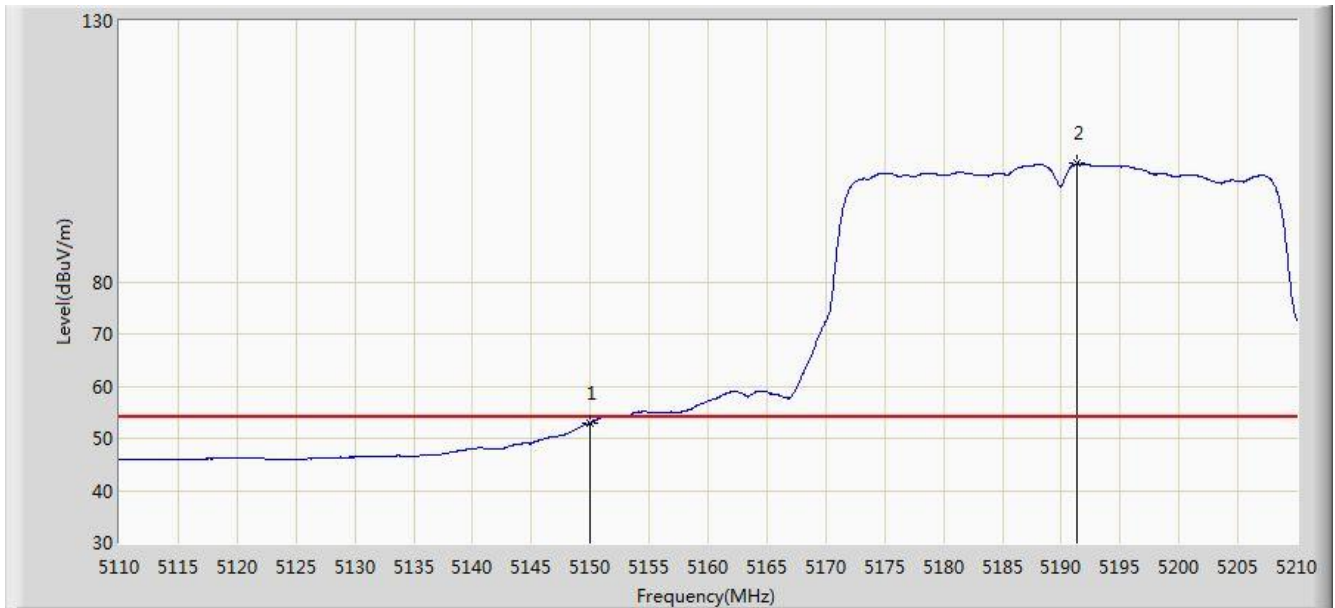


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.971	48.802	-1.029	54.000	4.170	AV
2		*	5191.300	102.624	98.595	N/A	N/A	4.028	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 16:27
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

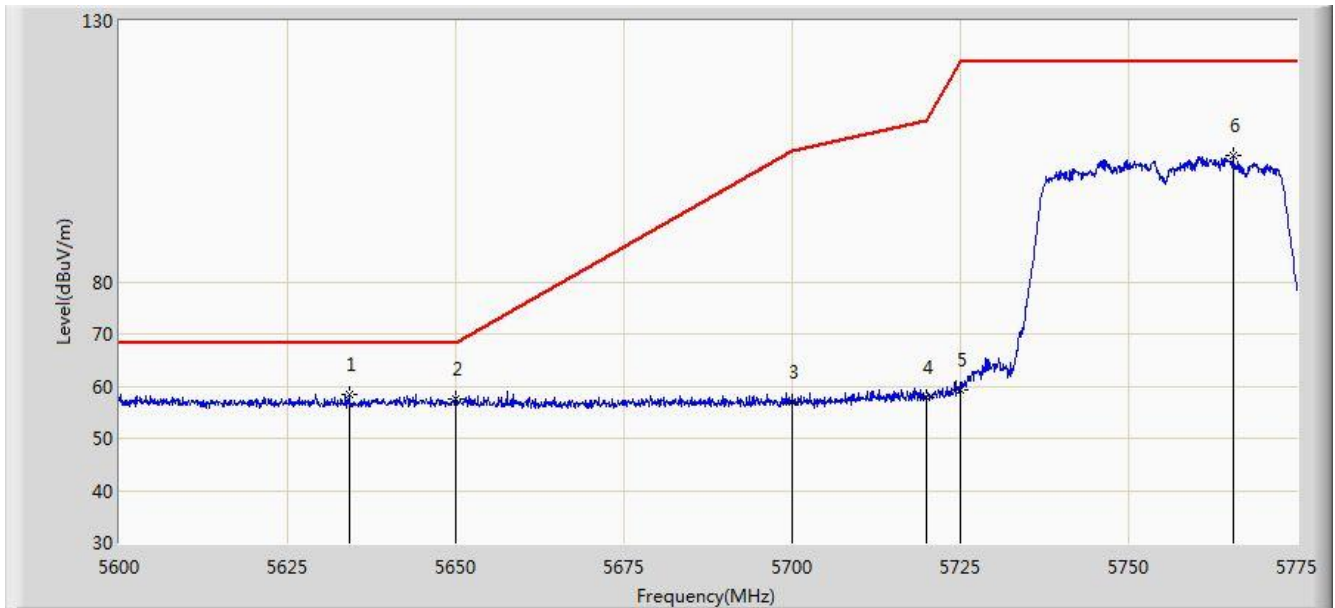


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5634.125	58.421	53.800	-9.779	68.200	4.621	PK
2			5650.000	57.642	52.971	-10.558	68.200	4.671	PK
3			5700.000	56.819	51.941	-48.381	105.200	4.878	PK
4			5720.000	57.732	52.735	-53.068	110.800	4.997	PK
5			5725.000	59.309	54.280	-62.891	122.200	5.029	PK
6			5765.462	104.201	98.933	N/A	N/A	5.267	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 16:33
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

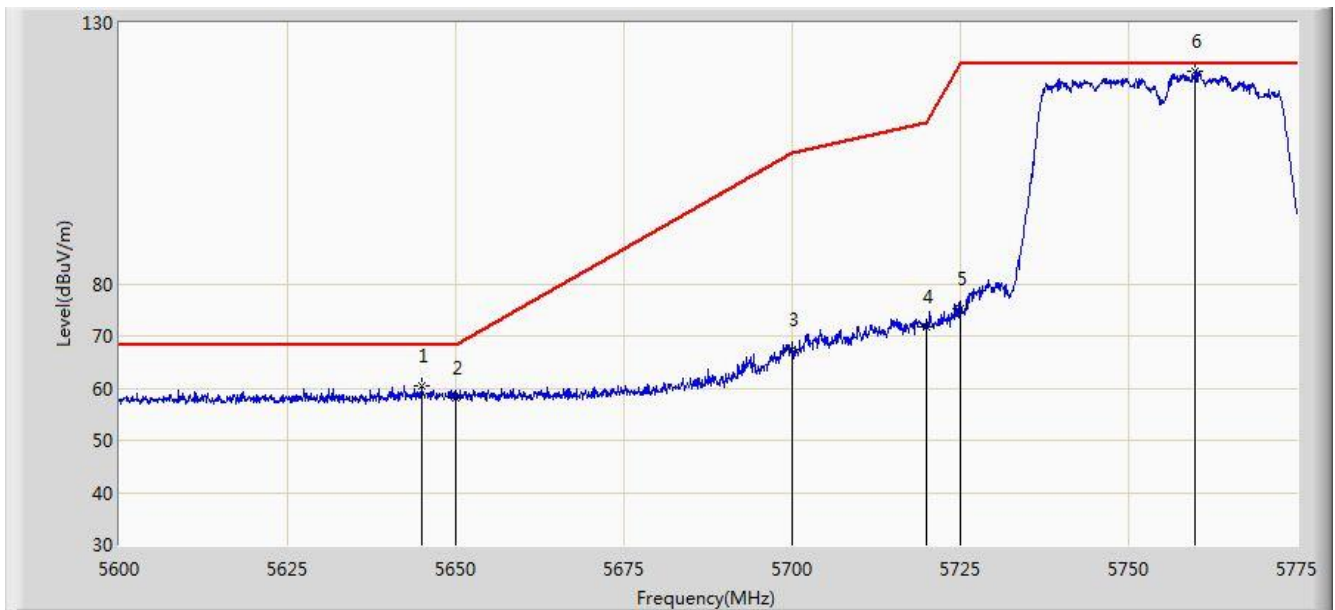


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5644.888	60.415	55.761	-7.785	68.200	4.654	PK
2			5650.000	58.226	53.555	-9.974	68.200	4.671	PK
3			5700.000	67.447	62.569	-37.753	105.200	4.878	PK
4			5720.000	71.865	66.868	-38.935	110.800	4.997	PK
5			5725.000	75.235	70.206	-46.965	122.200	5.029	PK
6		*	5759.950	120.600	115.360	N/A	N/A	5.240	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 16:41
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

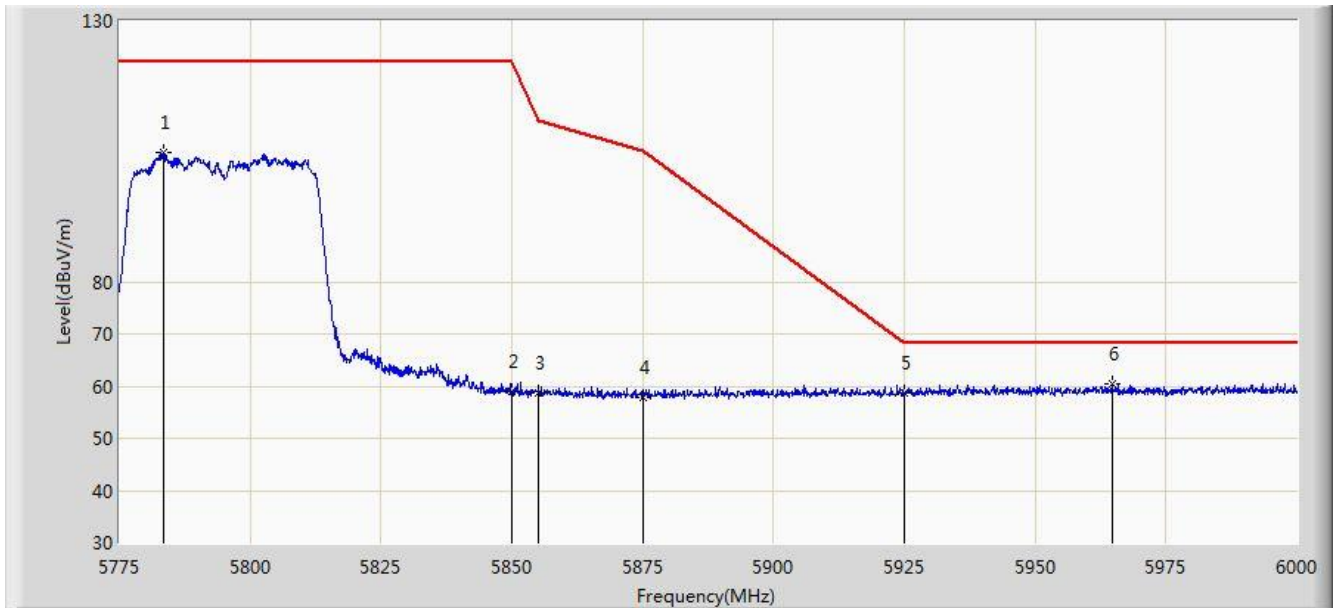


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5783.550	104.749	99.390	N/A	N/A	5.360	PK
2			5850.000	58.873	53.147	-63.327	122.200	5.726	PK
3			5855.000	58.657	52.911	-52.143	110.800	5.746	PK
4			5875.000	57.836	52.016	-47.364	105.200	5.820	PK
5			5925.000	58.575	52.609	-9.625	68.200	5.967	PK
6		*	5964.675	60.407	54.355	-7.793	68.200	6.053	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 16:37
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

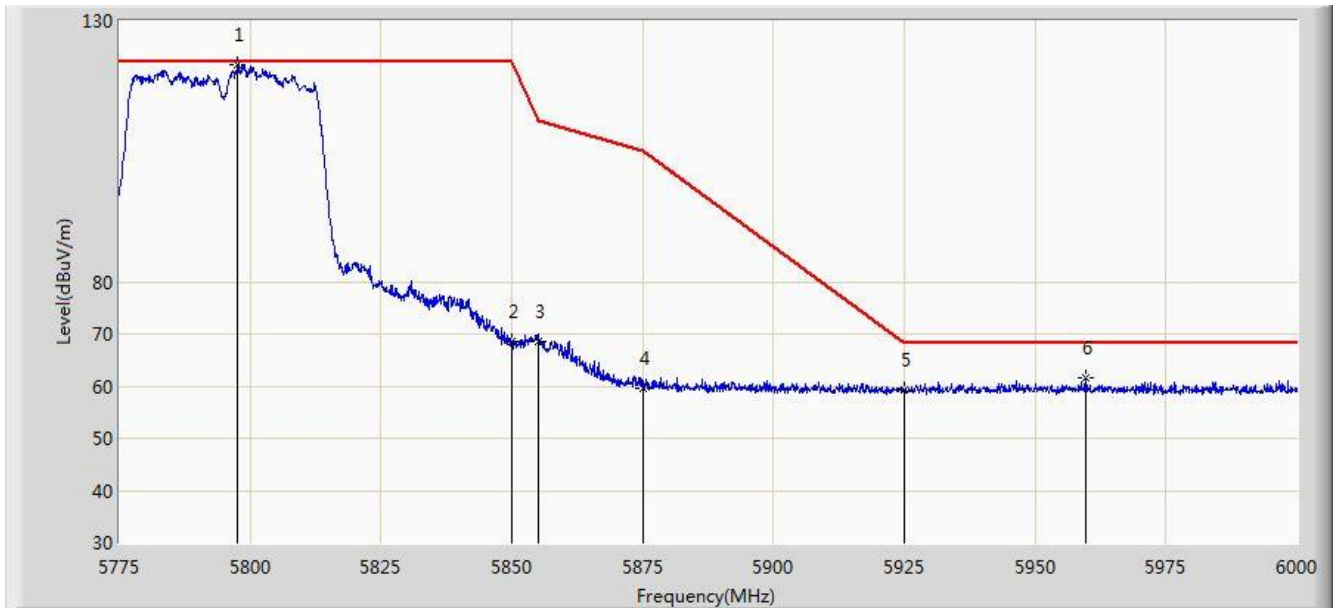


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5797.612	121.579	116.147	N/A	N/A	5.431	PK
2			5850.000	68.453	62.727	-53.747	122.200	5.726	PK
3			5855.000	68.427	62.681	-42.373	110.800	5.746	PK
4			5875.000	59.707	53.887	-45.493	105.200	5.820	PK
5			5925.000	59.288	53.322	-8.912	68.200	5.967	PK
6			5959.612	61.476	55.433	-6.724	68.200	6.043	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 17:00
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

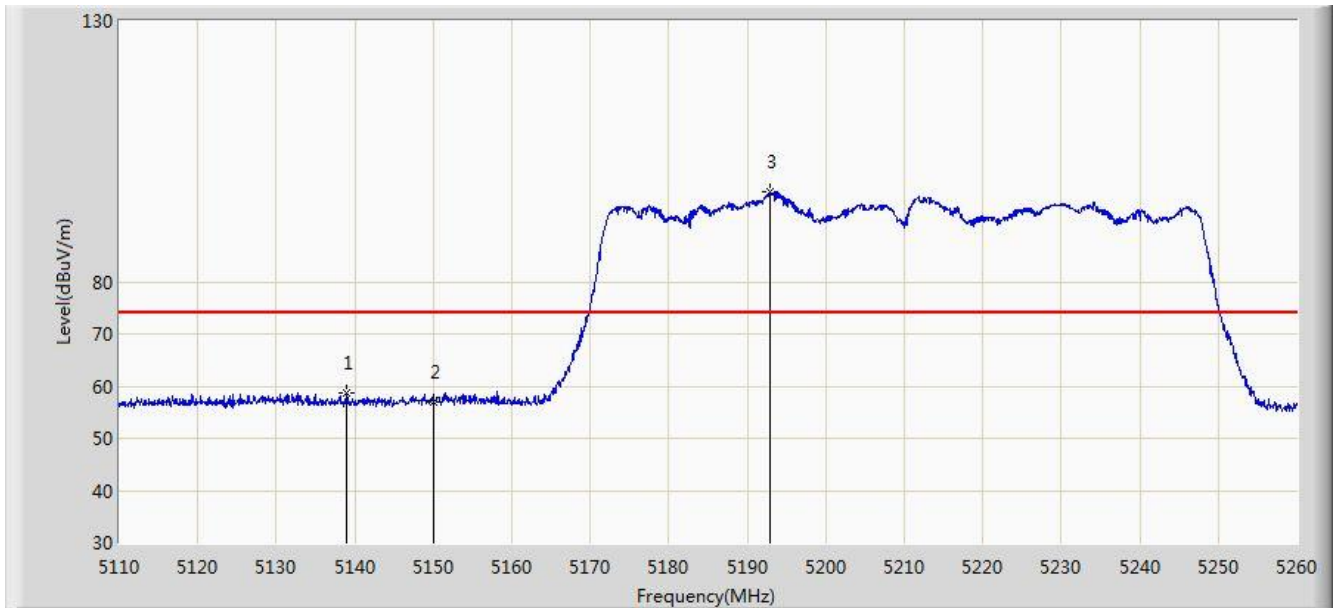


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.875	58.612	54.437	-15.388	74.000	4.175	PK
2			5150.000	56.947	52.778	-17.053	74.000	4.170	PK
3		*	5192.875	97.223	93.200	N/A	N/A	4.023	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 17:02
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

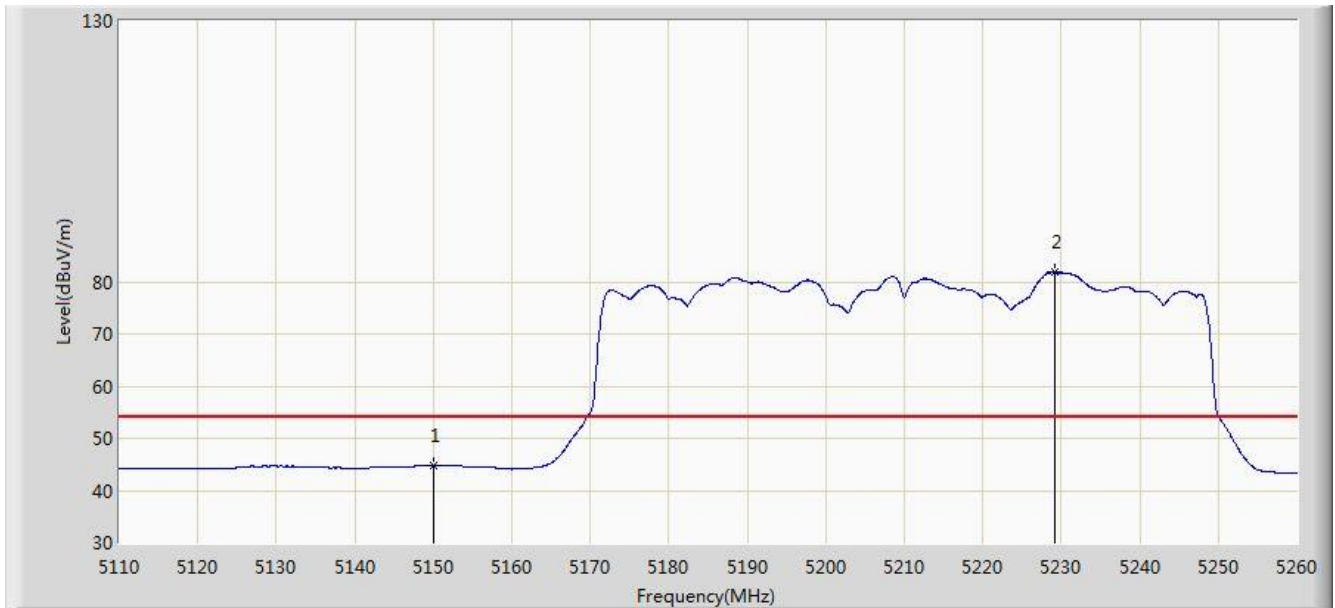


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.734	40.565	-9.266	54.000	4.170	AV
2		*	5229.100	81.856	77.944	N/A	N/A	3.913	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 16:59
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

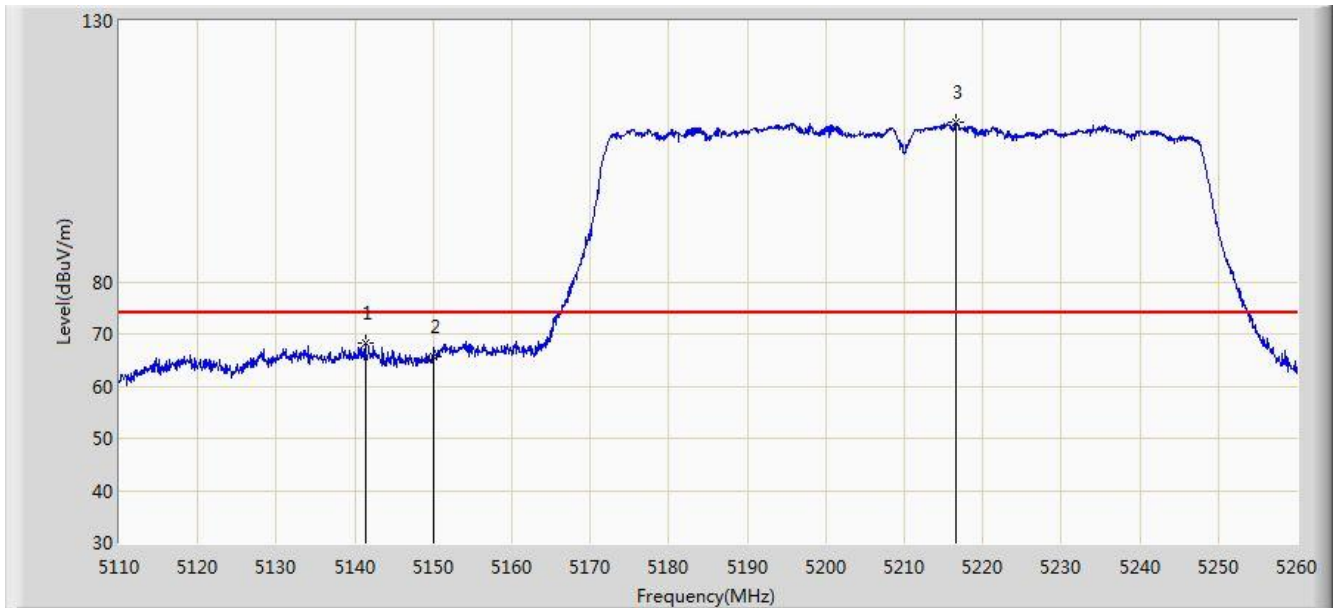


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.350	68.271	64.095	-5.729	74.000	4.175	PK
2			5150.000	65.530	61.361	-8.470	74.000	4.170	PK
3		*	5216.500	110.485	106.536	N/A	N/A	3.950	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 16:56
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

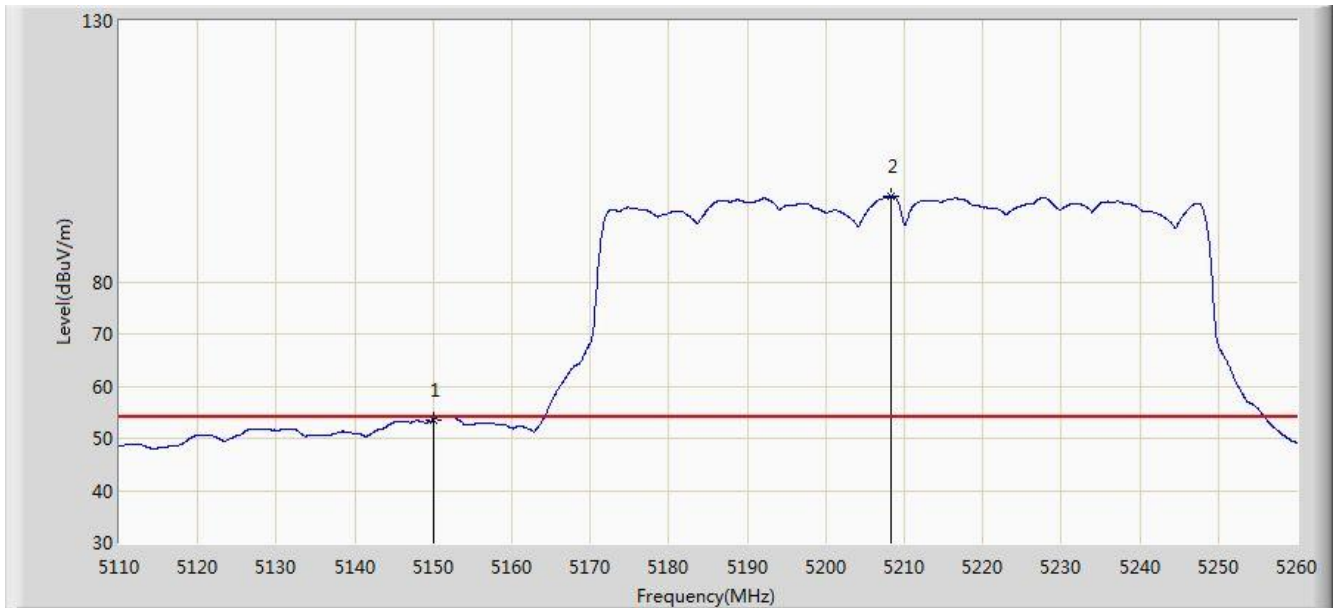


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.521	49.352	-0.479	54.000	4.170	AV
2		*	5208.325	96.356	92.382	N/A	N/A	3.973	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/20 - 17:38
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

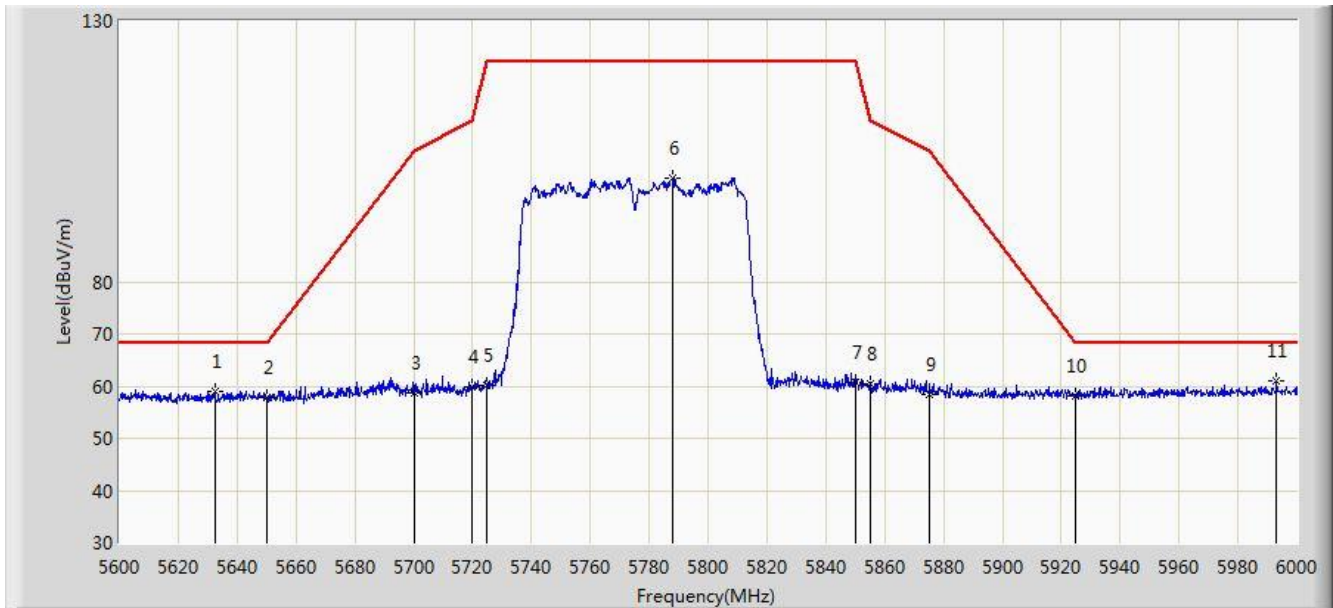


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5632.400	58.966	54.350	-9.234	68.200	4.616	PK
2			5650.000	57.946	53.275	-10.254	68.200	4.671	PK
3			5700.000	58.779	53.901	-46.421	105.200	4.878	PK
4			5720.000	59.896	54.899	-50.904	110.800	4.997	PK
5			5725.000	60.208	55.179	-61.992	122.200	5.029	PK
6			5788.000	99.916	94.534	N/A	N/A	5.381	PK
7			5850.000	60.776	55.050	-61.424	122.200	5.726	PK
8			5855.000	60.328	54.582	-50.472	110.800	5.746	PK
9			5875.000	58.448	52.628	-46.752	105.200	5.820	PK
10			5925.000	58.042	52.076	-10.158	68.200	5.967	PK
11		*	5993.200	61.048	54.949	-7.152	68.200	6.099	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/12 - 11:33
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHZ_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

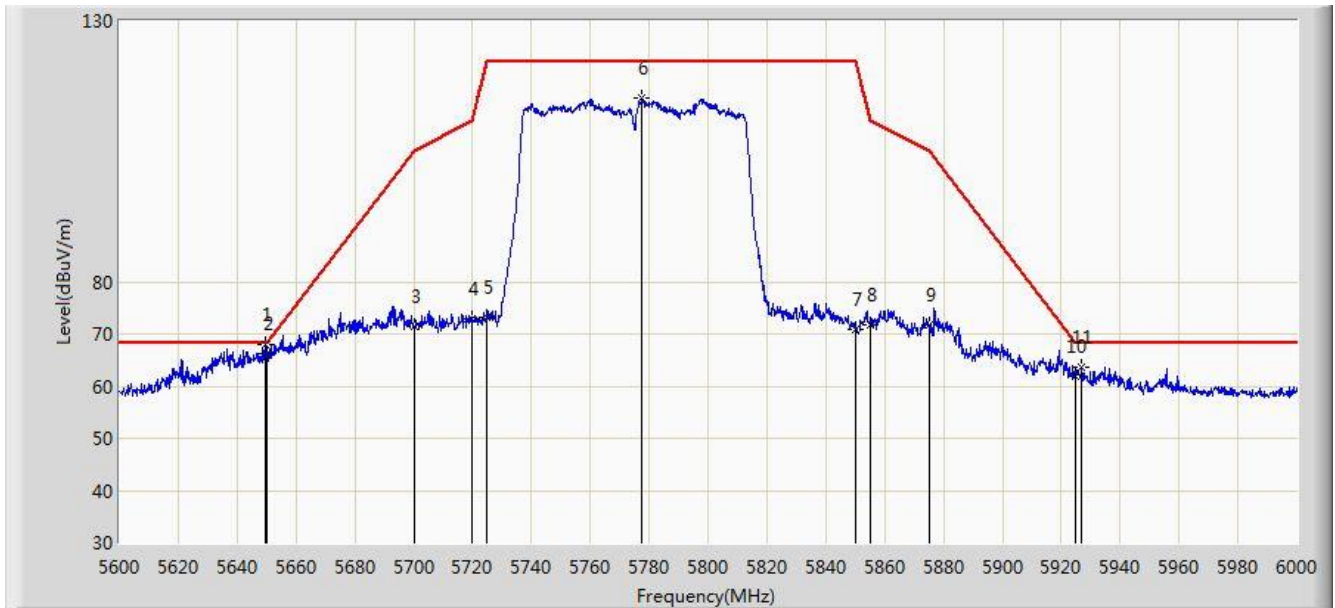


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5649.400	67.949	63.280	-0.251	68.200	4.669	PK
2			5650.000	66.105	61.434	-2.095	68.200	4.671	PK
3			5700.000	71.543	66.665	-33.657	105.200	4.878	PK
4			5720.000	72.957	67.960	-37.843	110.800	4.997	PK
5			5725.000	73.214	68.185	-48.986	122.200	5.029	PK
6			5777.600	115.132	109.802	N/A	N/A	5.330	PK
7			5850.000	70.975	65.249	-51.225	122.200	5.726	PK
8			5855.000	71.775	66.029	-39.025	110.800	5.746	PK
9			5875.000	71.721	65.901	-33.479	105.200	5.820	PK
10			5925.000	61.889	55.922	-6.311	68.200	5.967	PK
11			5927.000	63.605	57.634	-4.595	68.200	5.971	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/09 - 19:27
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

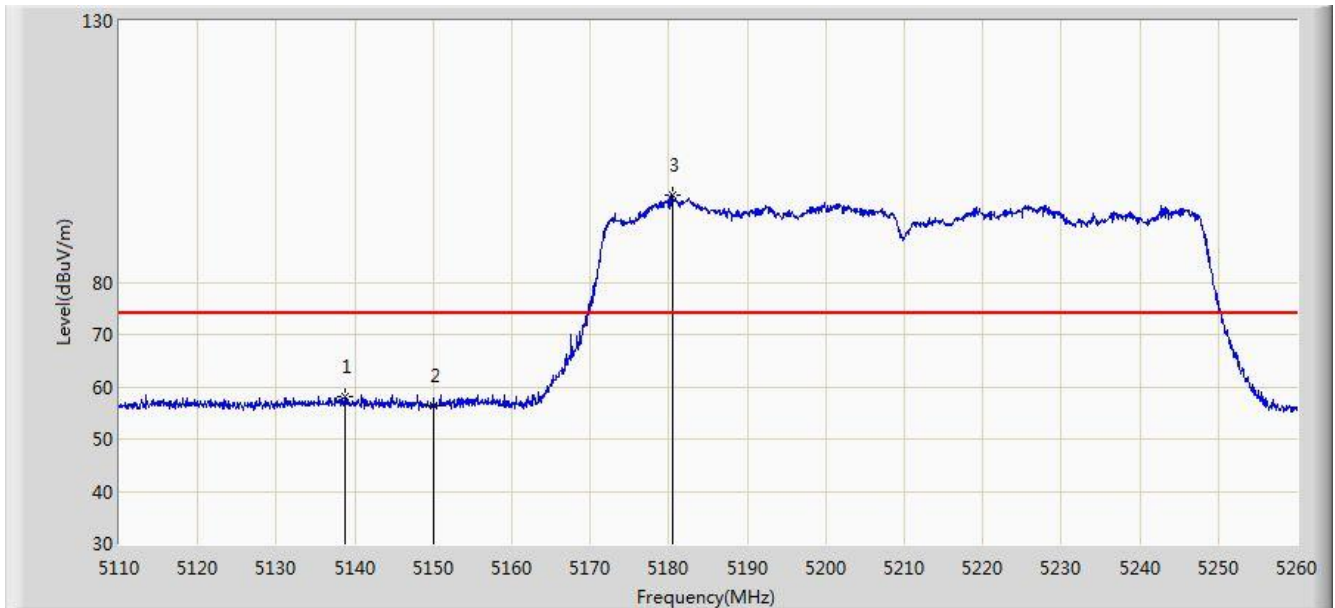


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.800	58.169	53.994	-15.831	74.000	4.175	PK
2			5150.000	56.261	52.092	-17.739	74.000	4.170	PK
3		*	5180.425	96.654	92.587	N/A	N/A	4.067	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/09 - 19:29
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

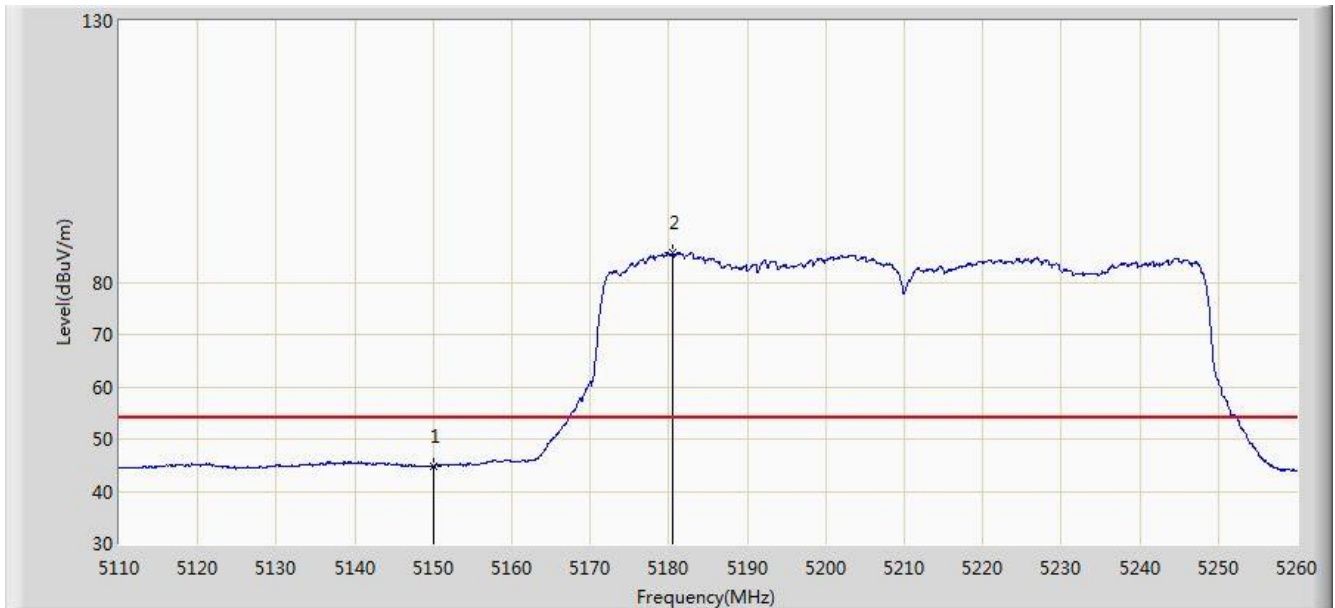


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.902	40.733	-9.098	54.000	4.170	AV
2		*	5180.425	85.537	81.470	N/A	N/A	4.067	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/09 - 19:27
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

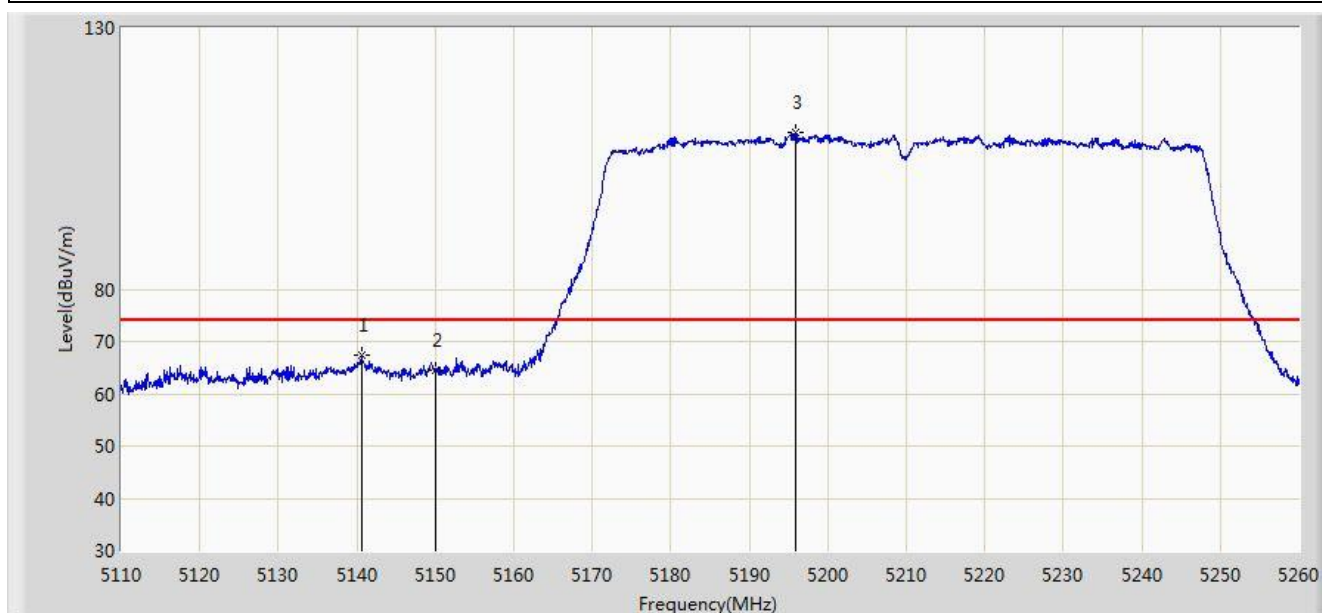


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.600	67.261	63.086	-6.739	74.000	4.176	PK
2			5150.000	64.371	60.202	-9.629	74.000	4.170	PK
3		*	5195.875	110.040	106.027	N/A	N/A	4.013	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/09 - 19:25
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

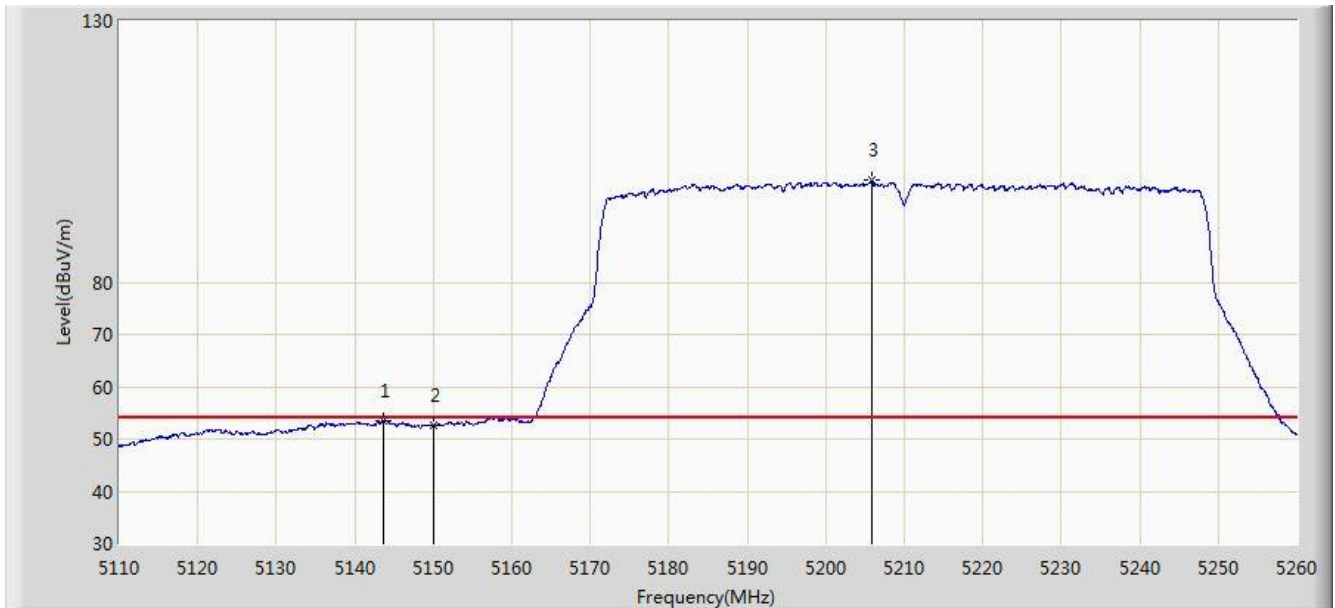


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.600	53.569	49.393	-0.431	54.000	4.175	AV
2			5150.000	52.574	48.405	-1.426	54.000	4.170	AV
3		*	5205.850	99.436	95.455	N/A	N/A	3.980	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/10 - 14:44
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

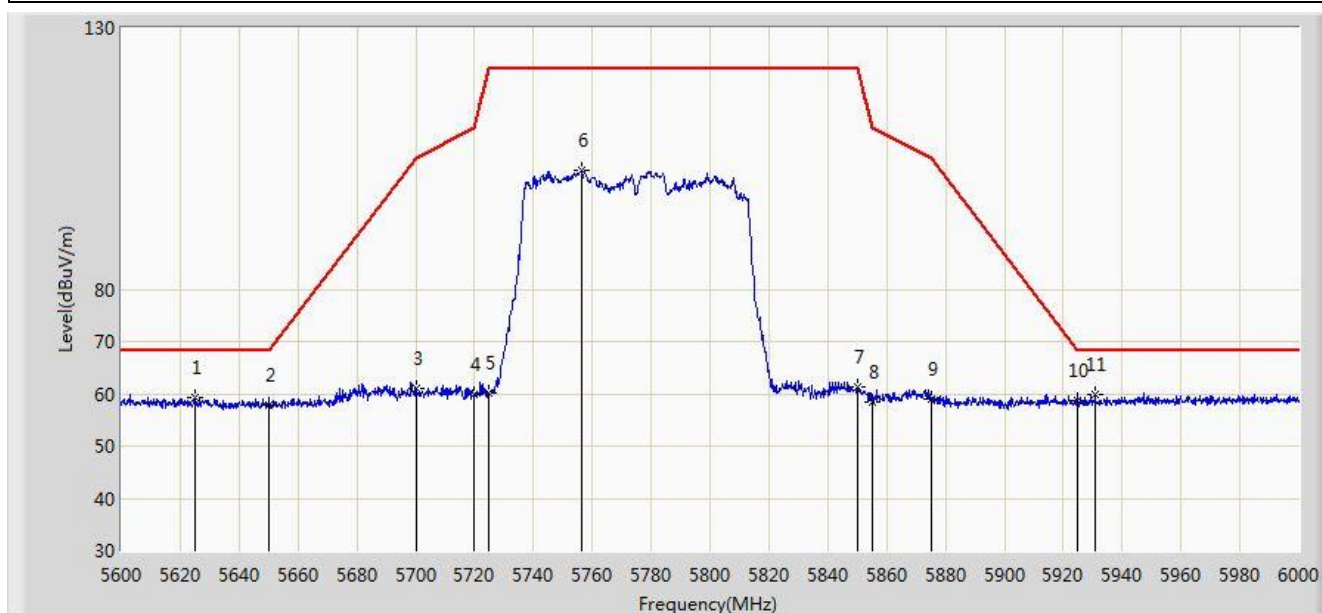


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5625.000	59.288	54.693	-8.912	68.200	4.595	PK
2			5650.000	57.806	53.135	-10.394	68.200	4.671	PK
3			5700.000	60.892	56.014	-44.308	105.200	4.878	PK
4			5720.000	59.726	54.729	-51.074	110.800	4.997	PK
5			5725.000	60.242	55.213	-61.958	122.200	5.029	PK
6			5756.200	102.887	97.669	N/A	N/A	5.219	PK
7			5850.000	61.449	55.723	-60.751	122.200	5.726	PK
8			5855.000	58.550	52.804	-52.250	110.800	5.746	PK
9			5875.000	59.033	53.213	-46.167	105.200	5.820	PK
10			5925.000	58.715	52.749	-9.485	68.200	5.967	PK
11		*	5930.800	59.810	53.829	-8.390	68.200	5.981	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/10 - 14:46
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

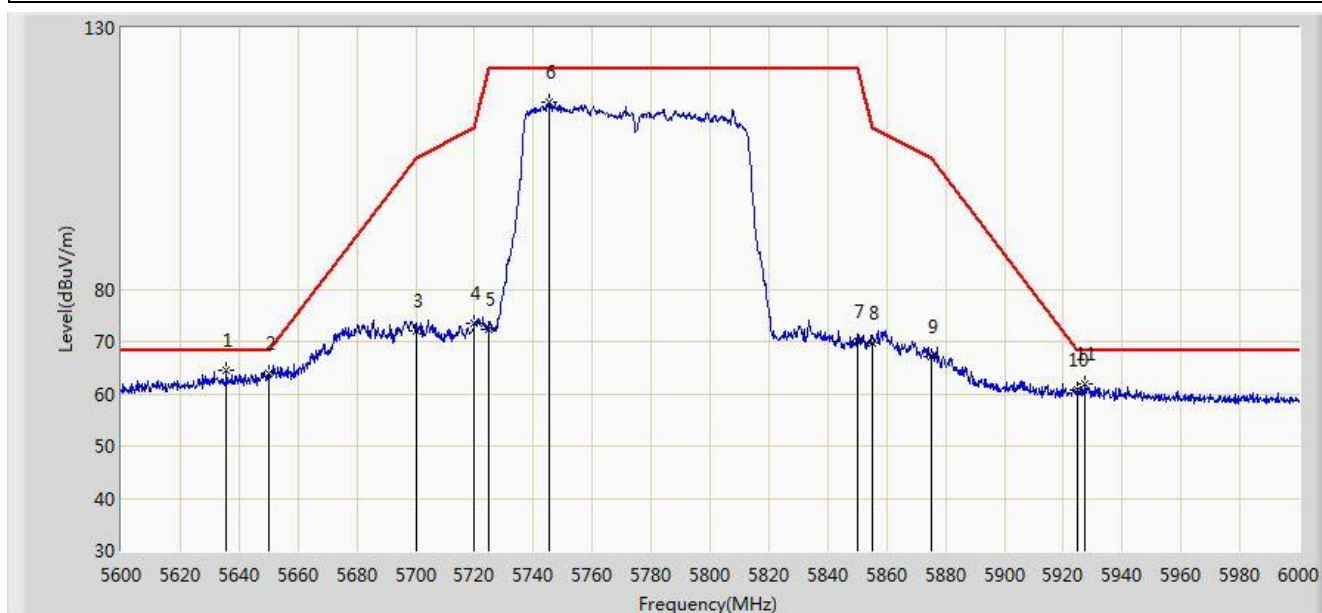


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5635.800	64.551	59.925	-3.649	68.200	4.625	PK
2			5650.000	63.896	59.225	-4.304	68.200	4.671	PK
3			5700.000	72.146	67.268	-33.054	105.200	4.878	PK
4			5720.000	73.503	68.506	-37.297	110.800	4.997	PK
5			5725.000	72.208	67.179	-49.992	122.200	5.029	PK
6			5745.200	115.695	110.539	N/A	N/A	5.156	PK
7			5850.000	70.046	64.320	-52.154	122.200	5.726	PK
8			5855.000	69.722	63.976	-41.078	110.800	5.746	PK
9			5875.000	67.154	61.334	-38.046	105.200	5.820	PK
10			5925.000	60.644	54.678	-7.556	68.200	5.967	PK
11			5927.400	61.930	55.958	-6.270	68.200	5.973	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/09 - 19:52
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

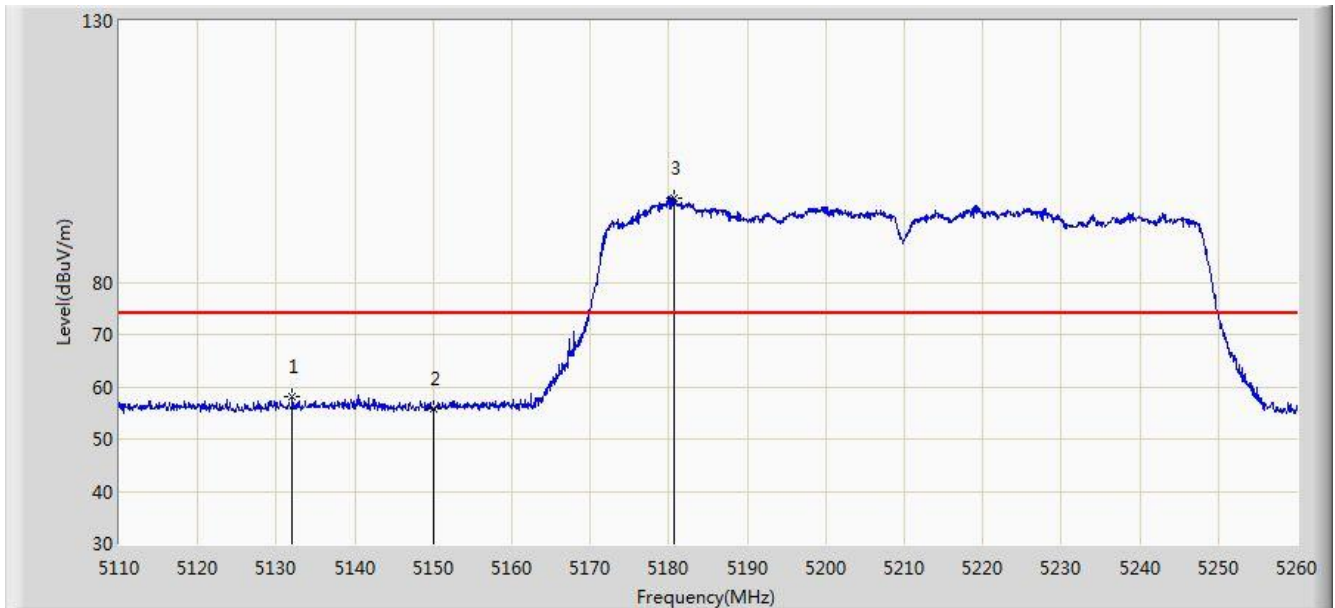


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5132.050	58.169	53.994	-15.831	74.000	4.175	PK
2			5150.000	55.816	51.647	-18.184	74.000	4.170	PK
3		*	5180.650	96.008	91.941	N/A	N/A	4.067	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/09 - 19:53
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

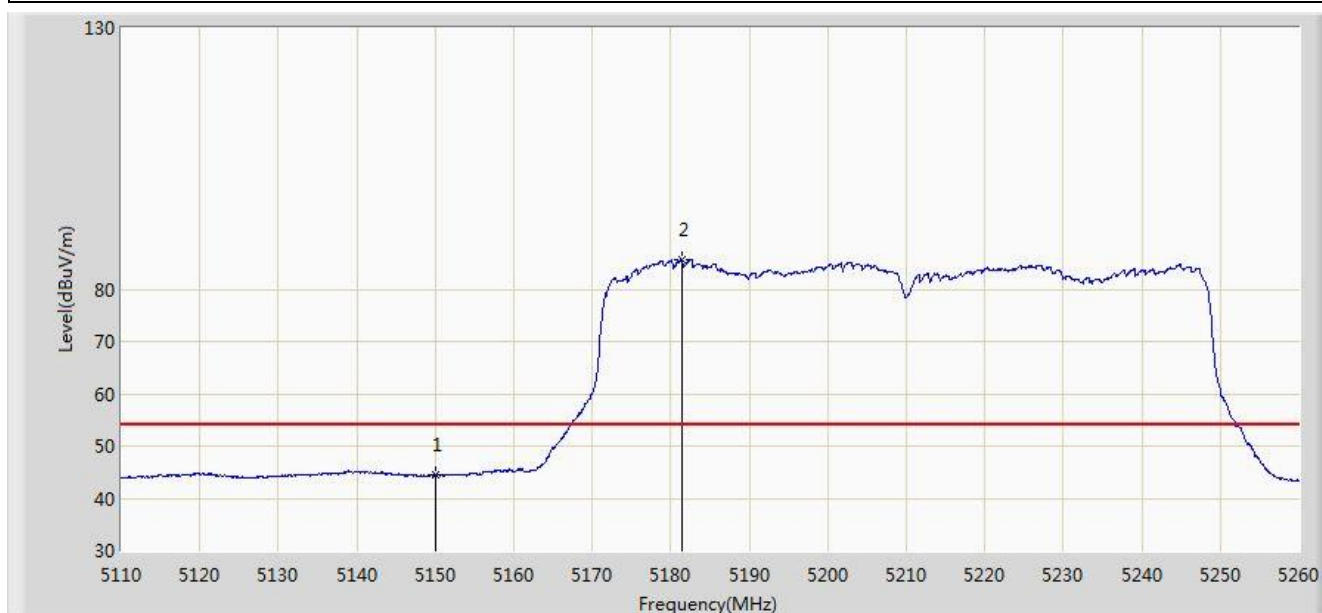


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.450	40.281	-9.550	54.000	4.170	AV
2		*	5181.475	85.575	81.511	N/A	N/A	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/09 - 19:50
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

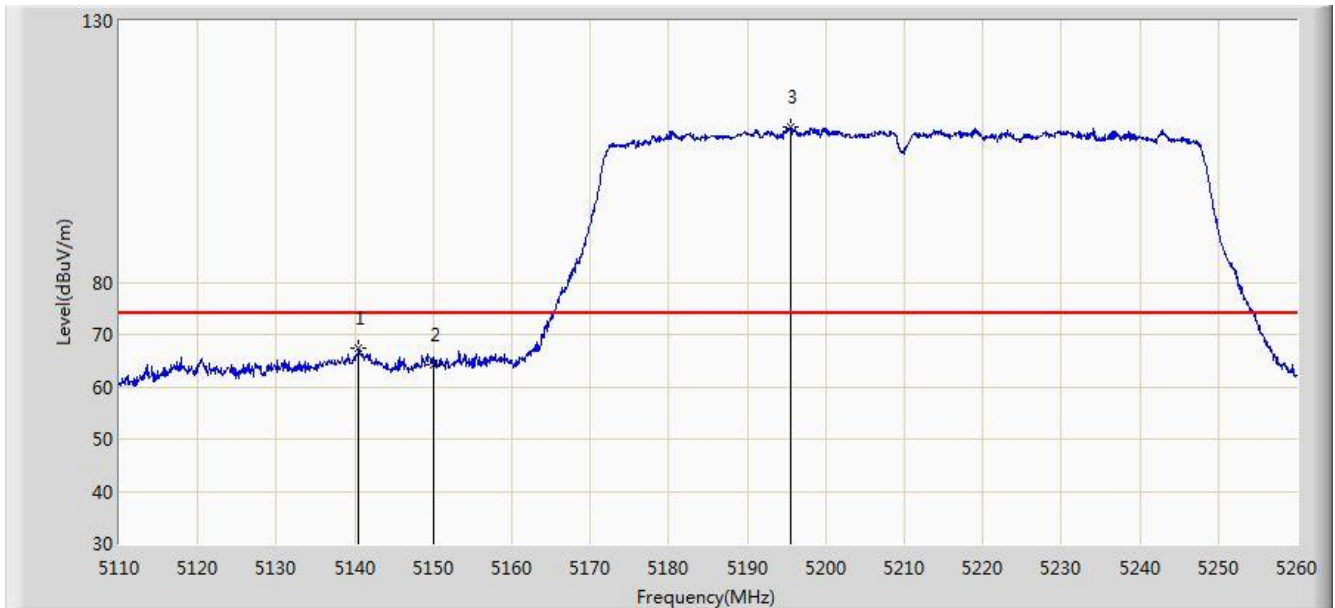


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.525	67.516	63.341	-6.484	74.000	4.176	PK
2			5150.000	64.315	60.146	-9.685	74.000	4.170	PK
3		*	5195.575	109.634	105.620	N/A	N/A	4.014	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/09 - 19:48
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

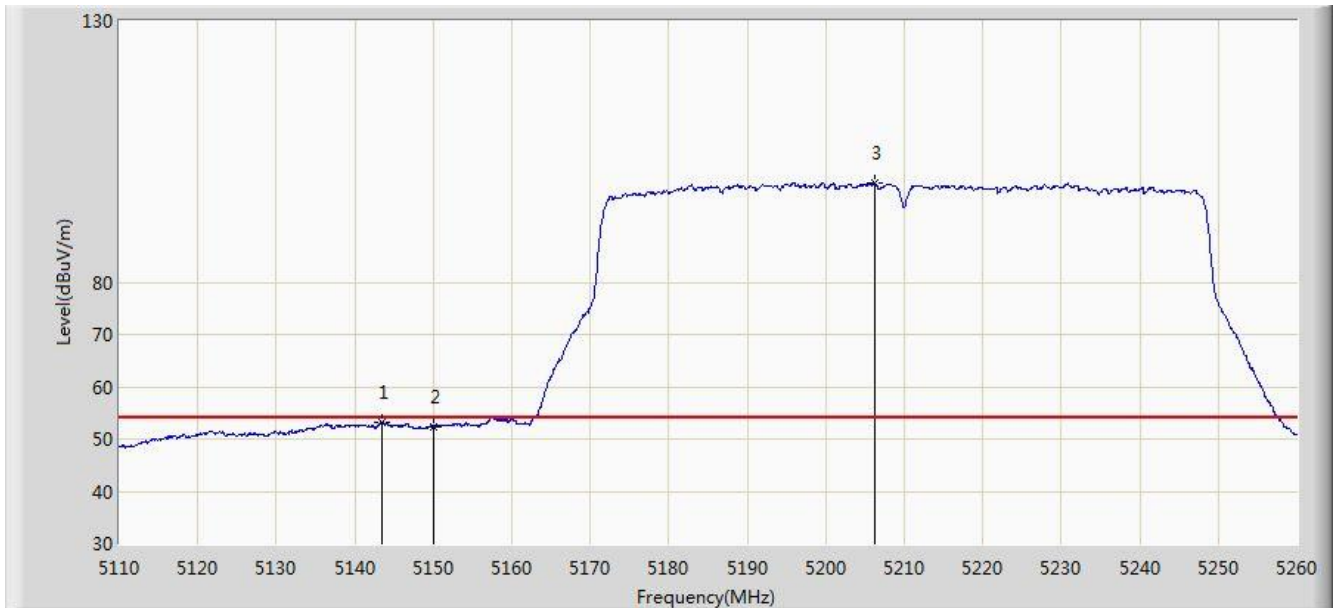


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.375	53.184	49.008	-0.816	54.000	4.176	AV
2			5150.000	52.427	48.258	-1.573	54.000	4.170	AV
3		*	5206.225	99.025	95.045	N/A	N/A	3.980	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/10 - 15:32
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

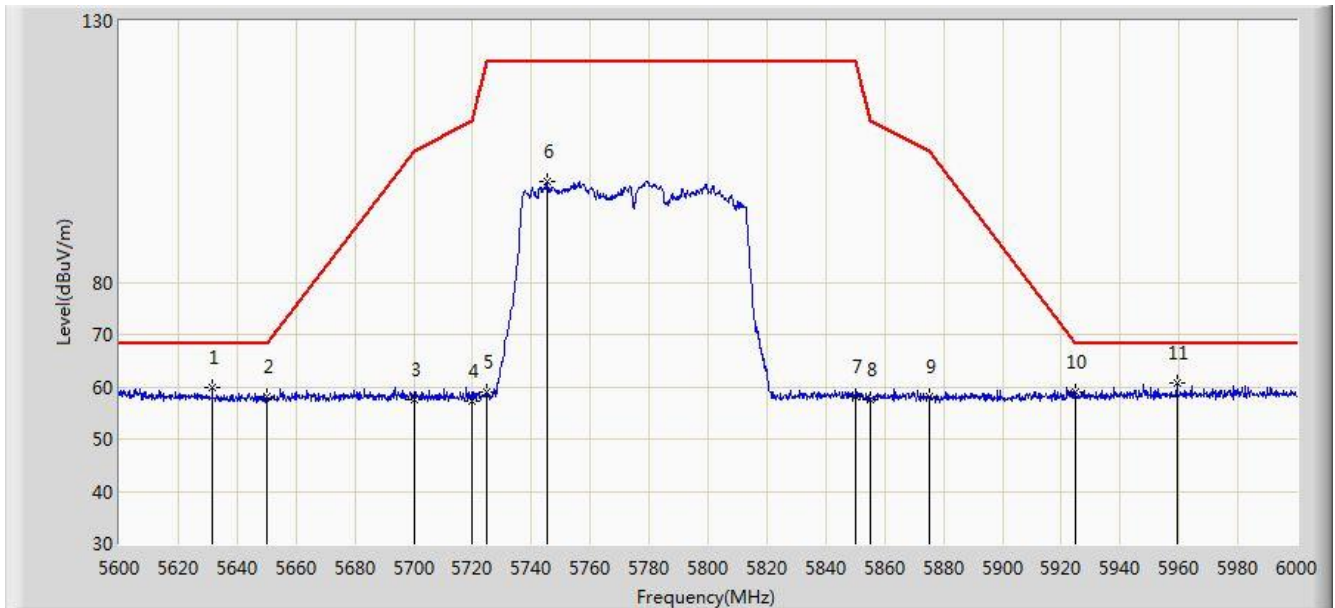


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5631.600	59.911	55.297	-8.289	68.200	4.614	PK
2			5650.000	58.080	53.409	-10.120	68.200	4.671	PK
3			5700.000	57.680	52.802	-47.520	105.200	4.878	PK
4			5720.000	57.192	52.195	-53.608	110.800	4.997	PK
5			5725.000	58.954	53.925	-63.246	122.200	5.029	PK
6			5745.200	99.252	94.096	N/A	N/A	5.156	PK
7			5850.000	58.045	52.319	-64.155	122.200	5.726	PK
8			5855.000	57.478	51.732	-53.322	110.800	5.746	PK
9			5875.000	58.189	52.369	-47.011	105.200	5.820	PK
10			5925.000	59.009	53.043	-9.191	68.200	5.967	PK
11		*	5959.400	60.717	54.674	-7.483	68.200	6.042	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/10 - 15:34
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

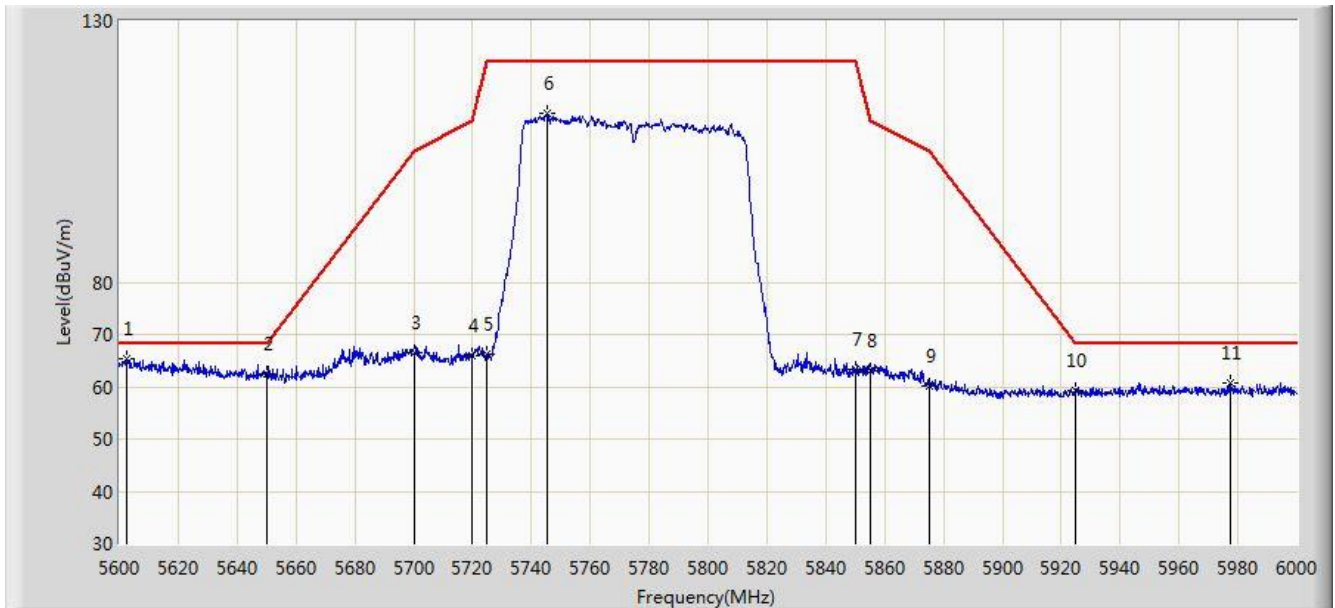


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5602.600	65.437	60.903	-2.763	68.200	4.534	PK
2			5650.000	62.455	57.784	-5.745	68.200	4.671	PK
3			5700.000	66.379	61.501	-38.821	105.200	4.878	PK
4			5720.000	65.858	60.861	-44.942	110.800	4.997	PK
5			5725.000	66.153	61.124	-56.047	122.200	5.029	PK
6			5745.200	112.174	107.018	N/A	N/A	5.156	PK
7			5850.000	63.319	57.593	-58.881	122.200	5.726	PK
8			5855.000	62.928	57.182	-47.872	110.800	5.746	PK
9			5875.000	60.069	54.249	-45.131	105.200	5.820	PK
10			5925.000	59.334	53.368	-8.866	68.200	5.967	PK
11			5977.400	60.760	54.687	-7.440	68.200	6.073	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 20:26
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

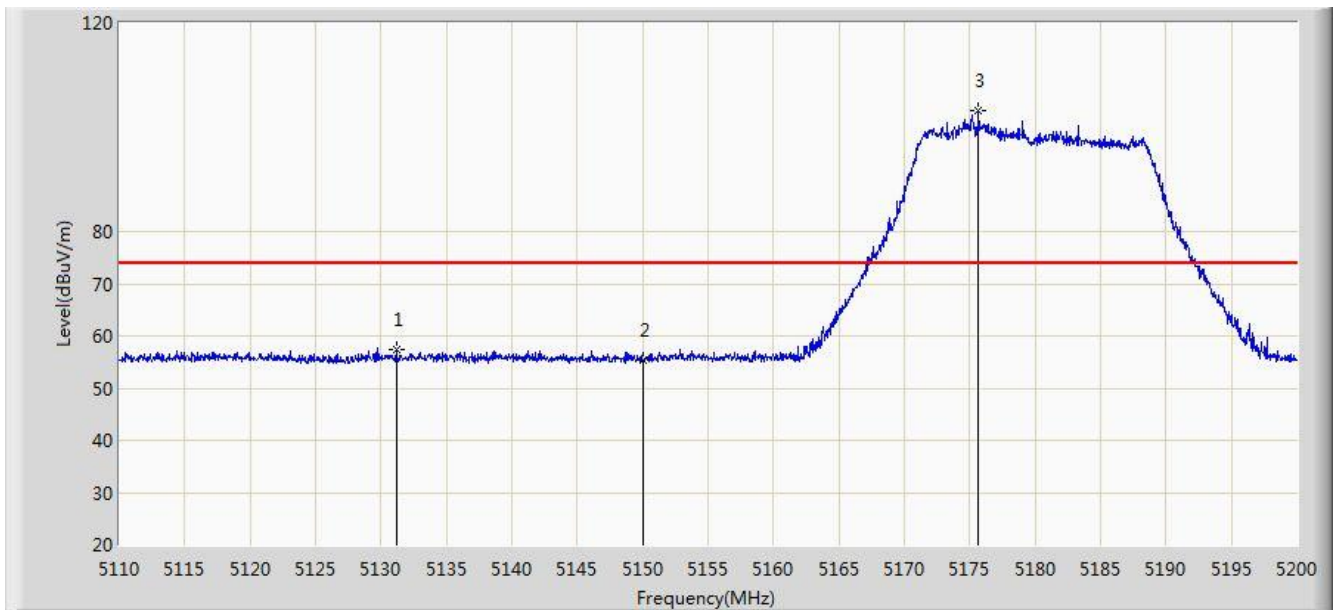


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.195	57.435	53.260	-16.565	74.000	4.175	PK
2			5150.000	55.486	51.317	-18.514	74.000	4.170	PK
3		*	5175.655	103.184	99.100	N/A	N/A	4.085	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 20:29
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

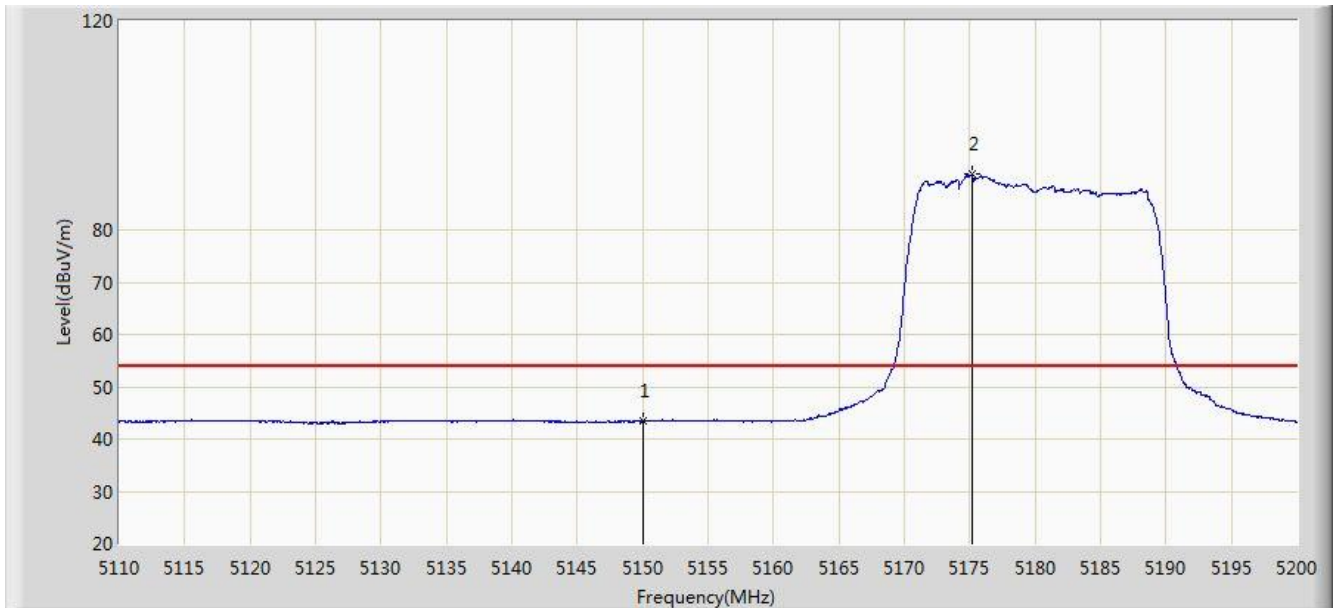


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	43.401	39.232	-10.599	54.000	4.170	AV
2		*	5175.205	90.662	86.576	N/A	N/A	4.086	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 20:45
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

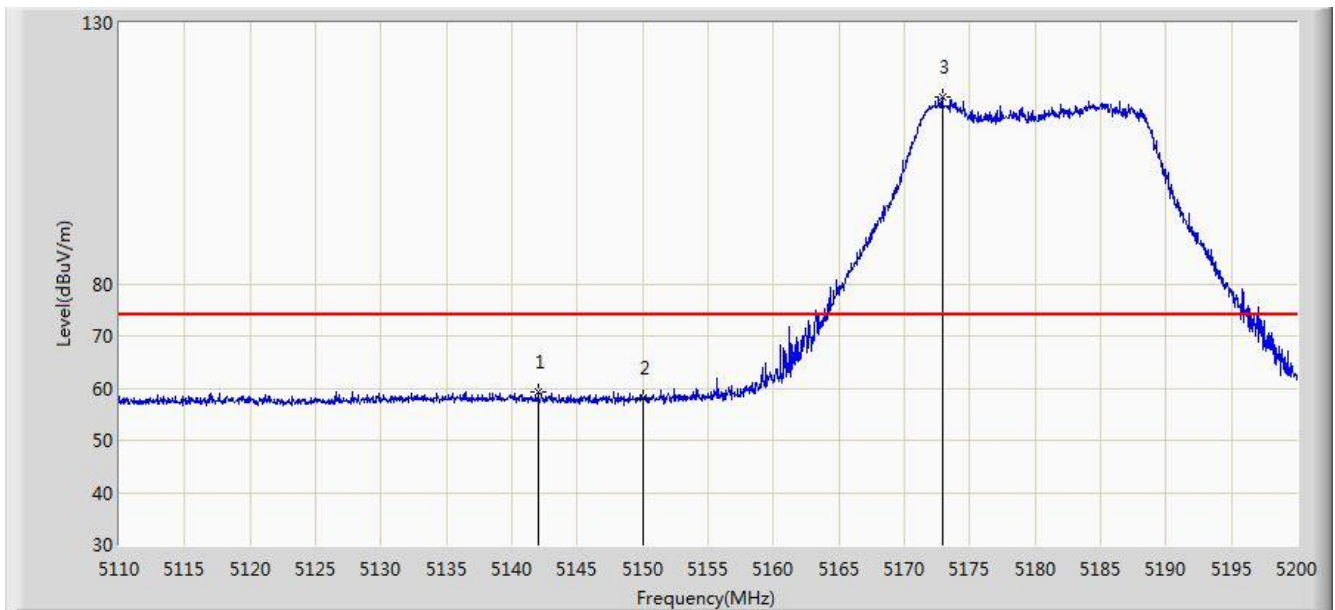


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.040	59.200	55.024	-14.800	74.000	4.176	PK
2			5150.000	58.119	53.950	-15.881	74.000	4.170	PK
3		*	5172.910	115.917	111.823	N/A	N/A	4.094	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 20:49
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

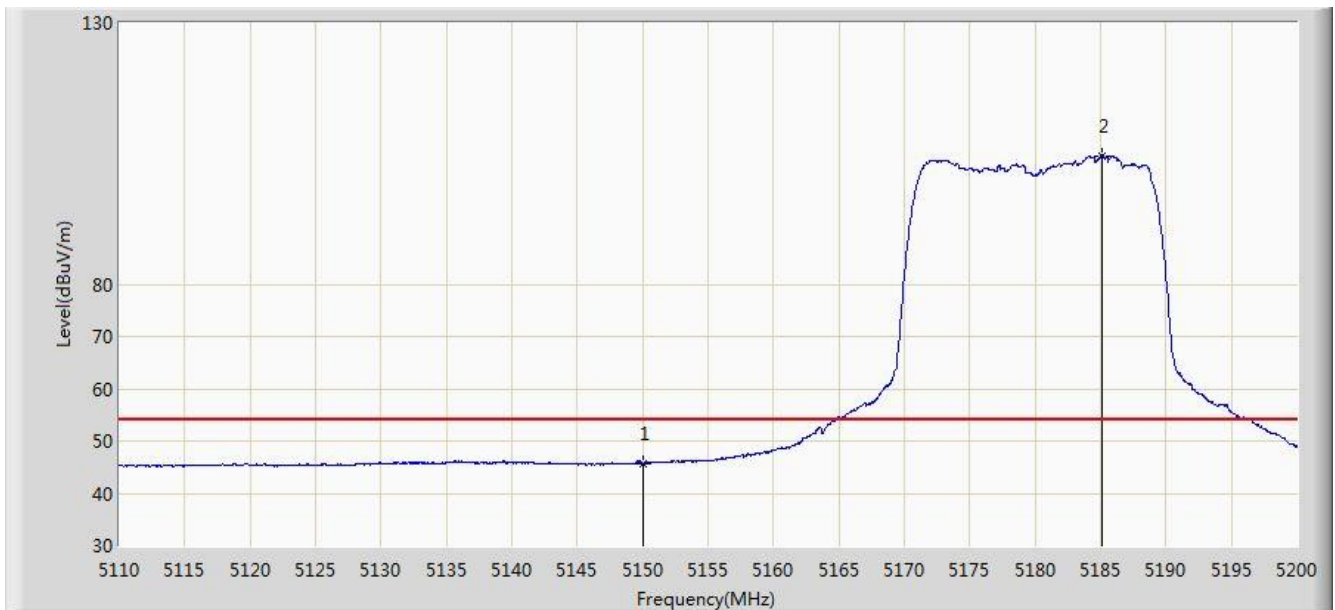


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.723	41.554	-8.277	54.000	4.170	AV
2		*	5185.105	104.527	100.476	N/A	N/A	4.050	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 21:40
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

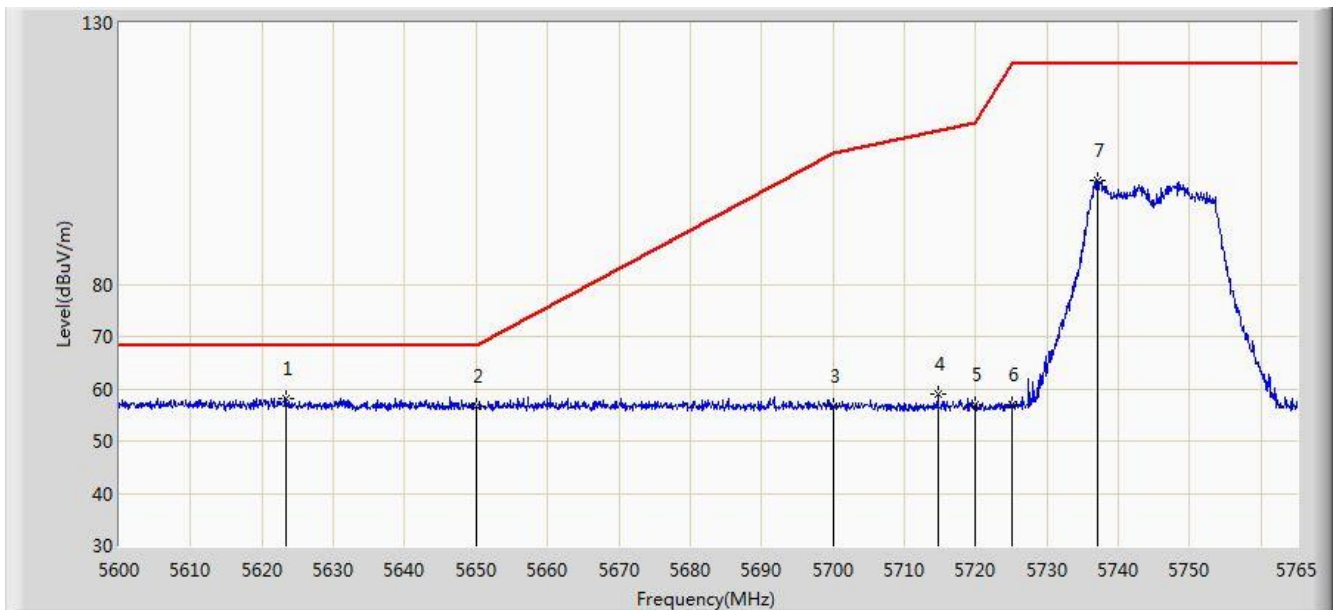


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5623.430	58.150	53.560	-10.050	68.200	4.590	PK
2			5650.000	56.564	51.893	-11.636	68.200	4.671	PK
3			5700.000	56.556	51.678	-48.644	105.200	4.878	PK
4			5714.675	58.882	53.919	-50.429	109.311	4.963	PK
5			5720.000	56.975	51.978	-53.825	110.800	4.997	PK
6			5725.000	56.933	51.904	-65.267	122.200	5.029	PK
7			5737.115	99.752	94.646	N/A	N/A	5.106	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 21:43
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

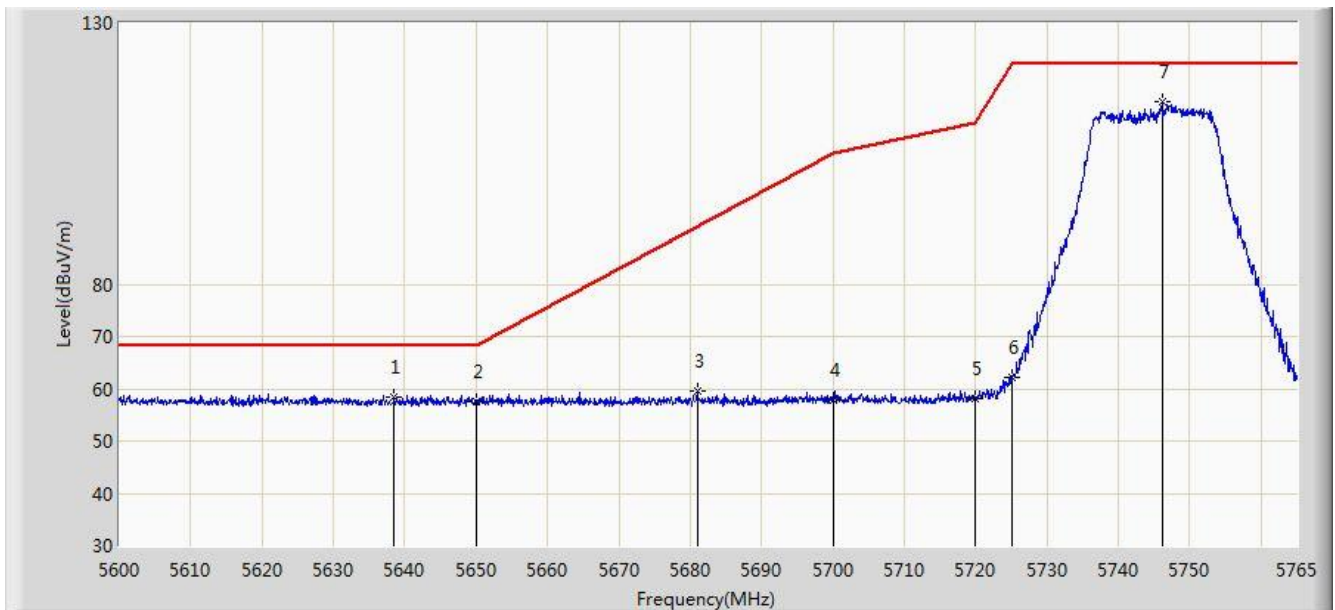


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5638.527	58.545	53.911	-9.655	68.200	4.634	PK
2			5650.000	57.519	52.848	-10.681	68.200	4.671	PK
3			5681.015	59.561	54.770	-31.628	91.189	4.792	PK
4			5700.000	57.966	53.088	-47.234	105.200	4.878	PK
5			5720.000	58.211	53.214	-52.589	110.800	4.997	PK
6			5725.000	62.148	57.119	-60.052	122.200	5.029	PK
7		*	5746.107	114.811	109.650	N/A	N/A	5.161	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 21:45
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

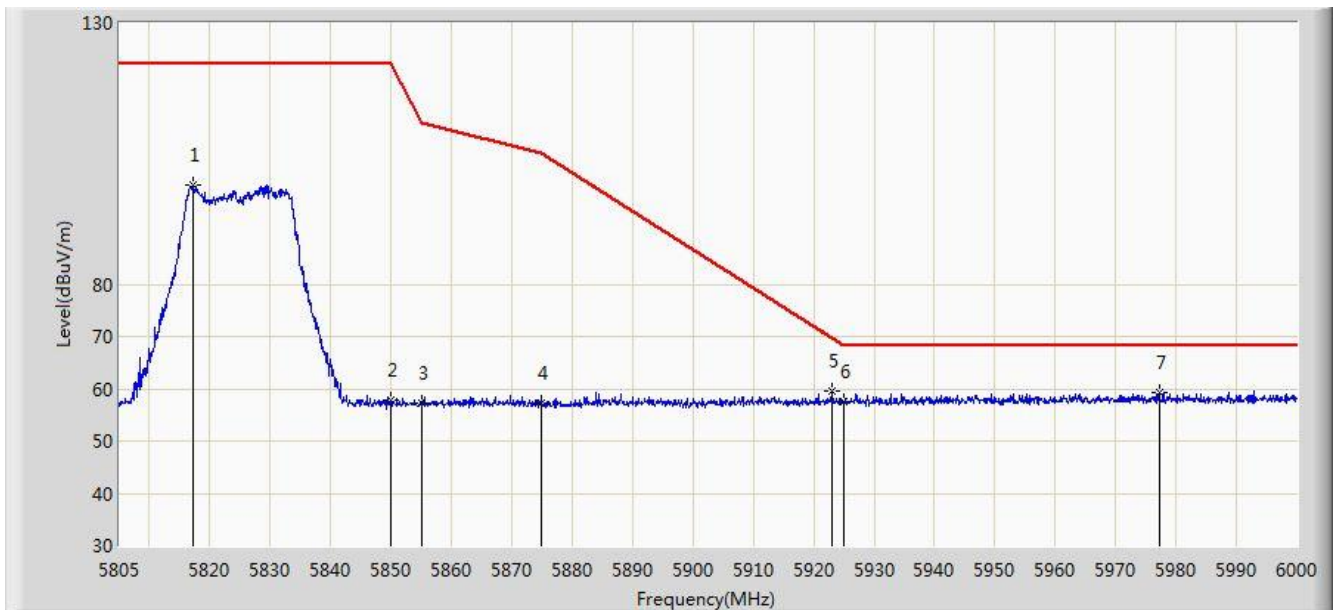


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5817.187	99.129	93.587	N/A	N/A	5.542	PK
2			5850.000	57.862	52.136	-64.338	122.200	5.726	PK
3			5855.000	57.377	51.631	-53.423	110.800	5.746	PK
4			5875.000	57.146	51.326	-48.054	105.200	5.820	PK
5			5922.975	59.692	53.731	-10.000	69.692	5.962	PK
6			5925.000	57.417	51.451	-10.783	68.200	5.967	PK
7		*	5977.185	59.289	53.216	-8.911	68.200	6.073	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 22:11
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

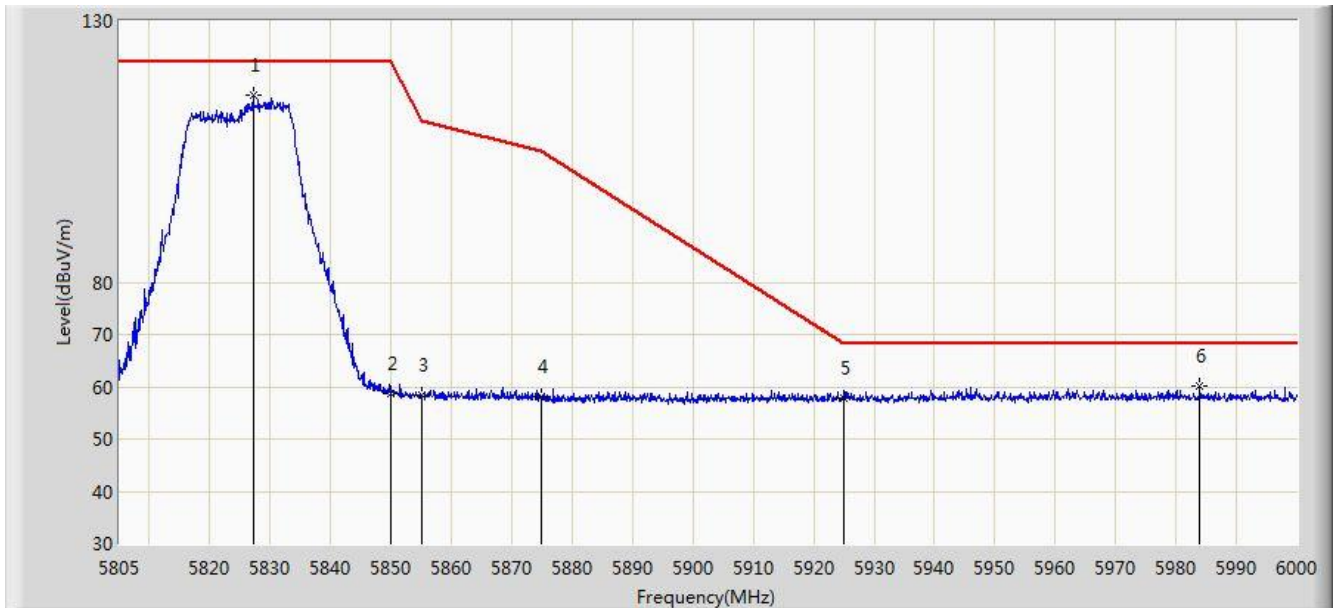


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5827.132	115.883	110.283	N/A	N/A	5.600	PK
2			5850.000	58.594	52.868	-63.606	122.200	5.726	PK
3			5855.000	58.495	52.749	-52.305	110.800	5.746	PK
4			5875.000	58.235	52.415	-46.965	105.200	5.820	PK
5			5925.000	57.811	51.845	-10.389	68.200	5.967	PK
6			5983.913	60.184	54.100	-8.016	68.200	6.085	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 22:13
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

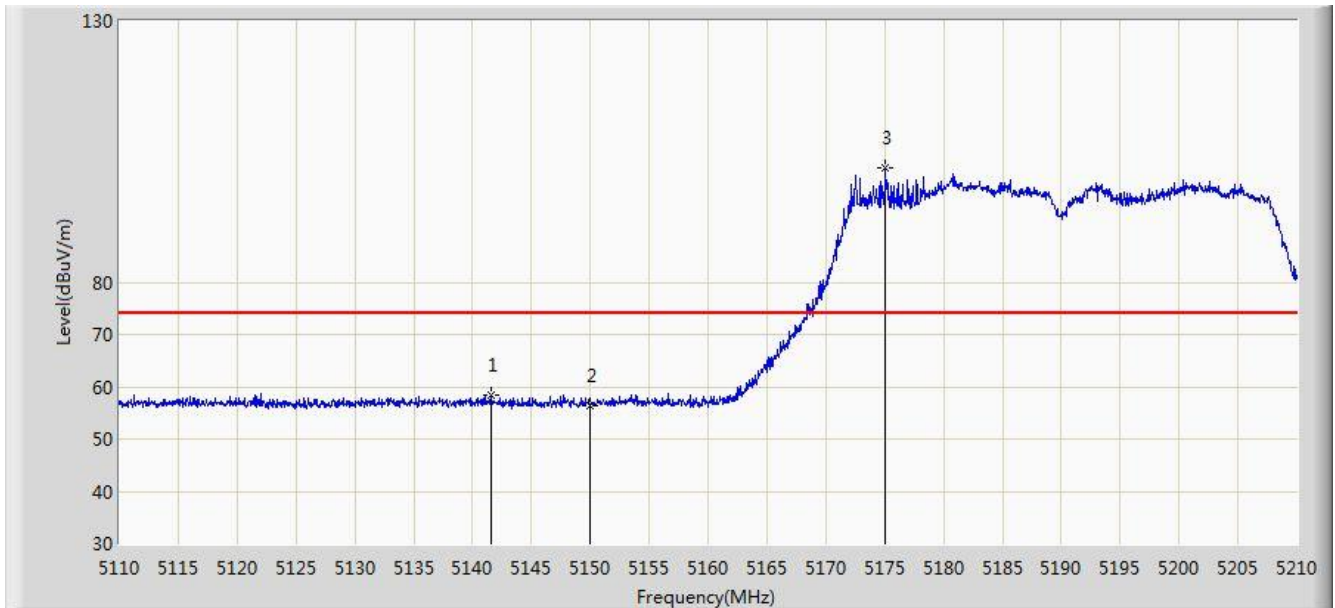


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.600	58.428	54.252	-15.572	74.000	4.176	PK
2			5150.000	56.507	52.338	-17.493	74.000	4.170	PK
3		*	5175.100	101.874	97.788	N/A	N/A	4.087	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 22:17
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

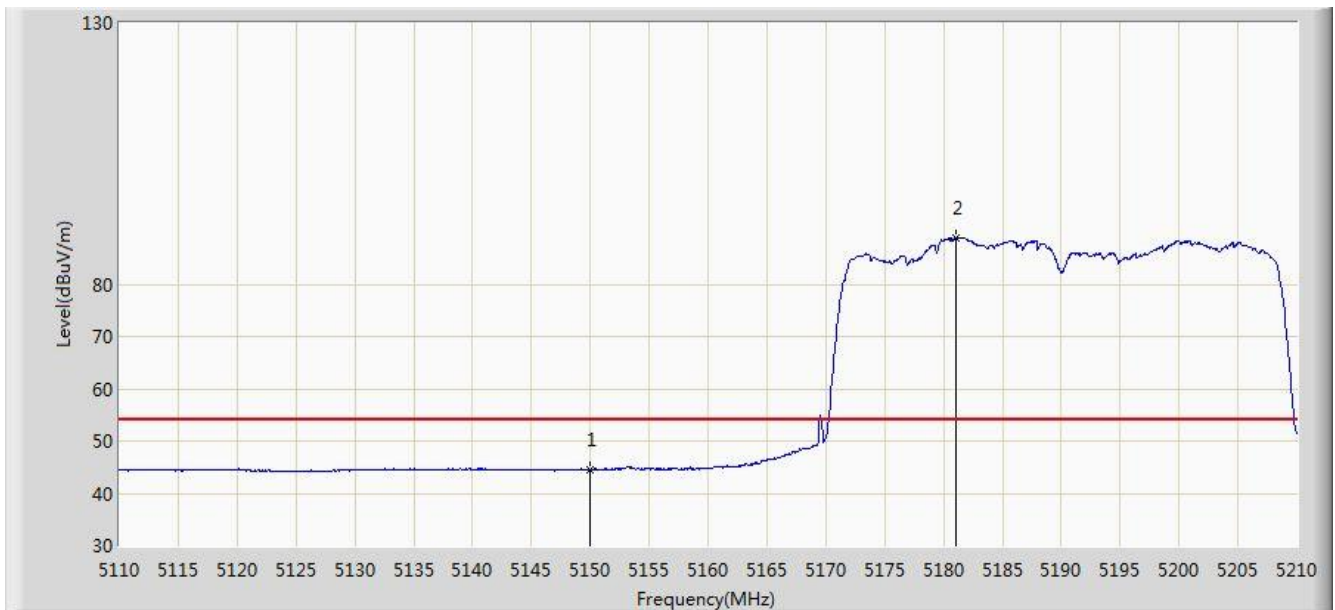


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.594	40.425	-9.406	54.000	4.170	AV
2		*	5181.050	88.878	84.813	N/A	N/A	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 22:19
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

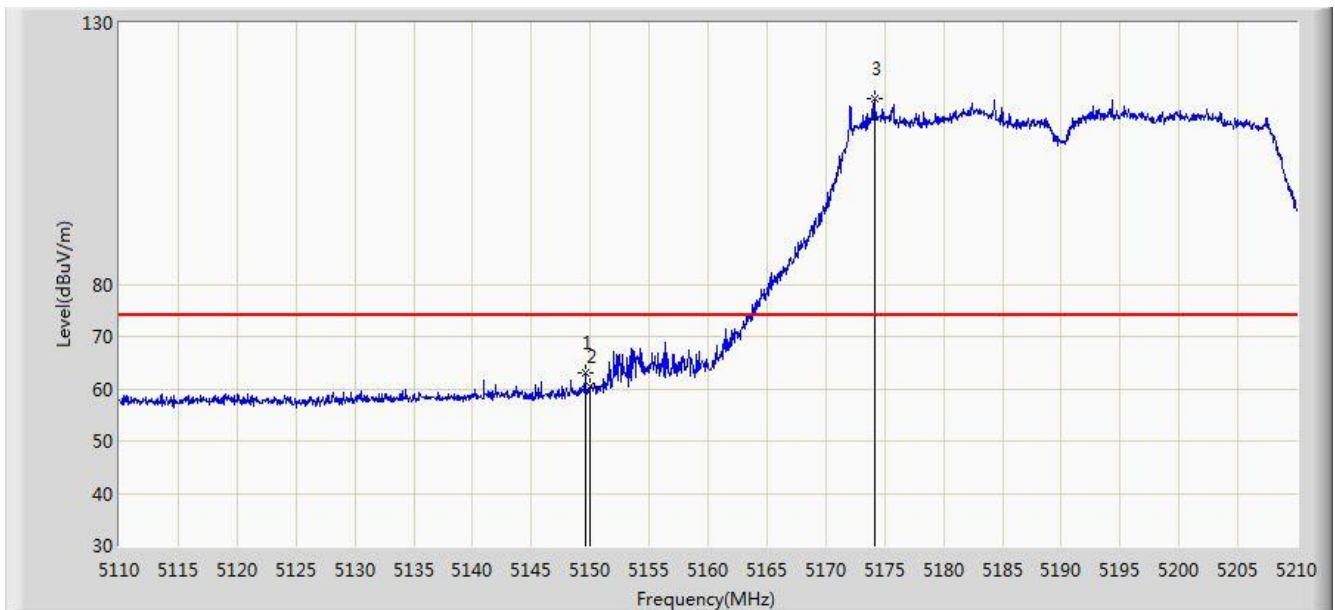


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.550	63.040	58.869	-10.960	74.000	4.170	PK
2			5150.000	60.397	56.228	-13.603	74.000	4.170	PK
3		*	5174.100	115.462	111.372	N/A	N/A	4.090	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 22:20
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

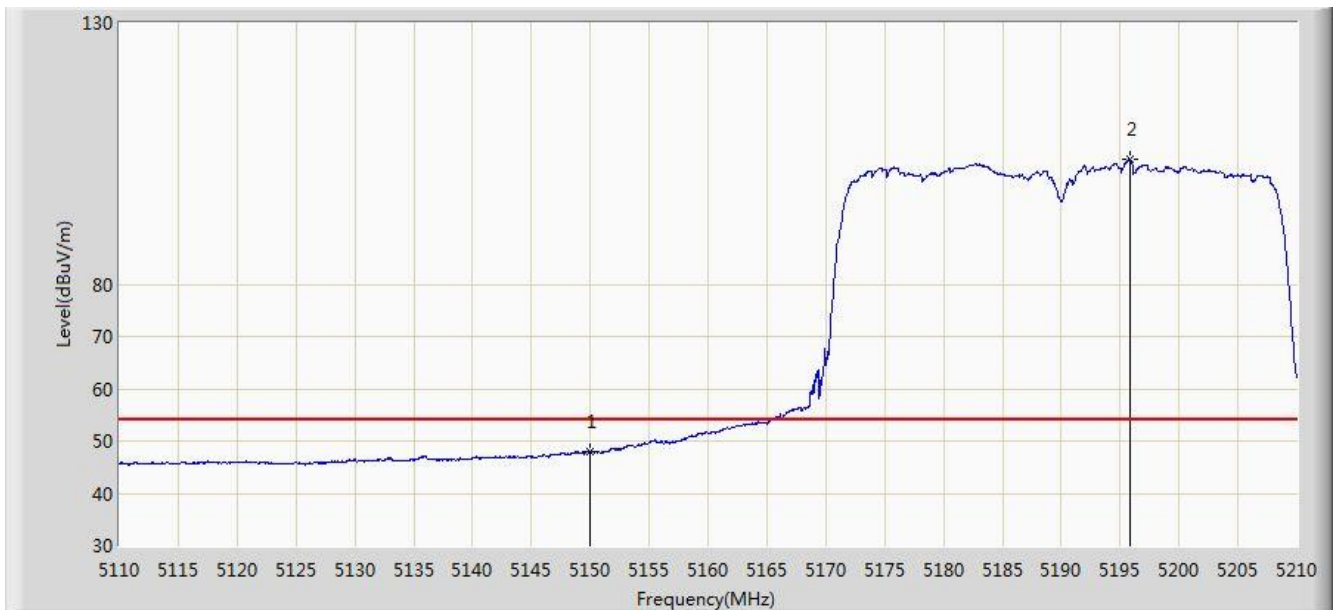


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.975	43.806	-6.025	54.000	4.170	AV
2		*	5195.800	103.840	99.827	N/A	N/A	4.013	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 22:56
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

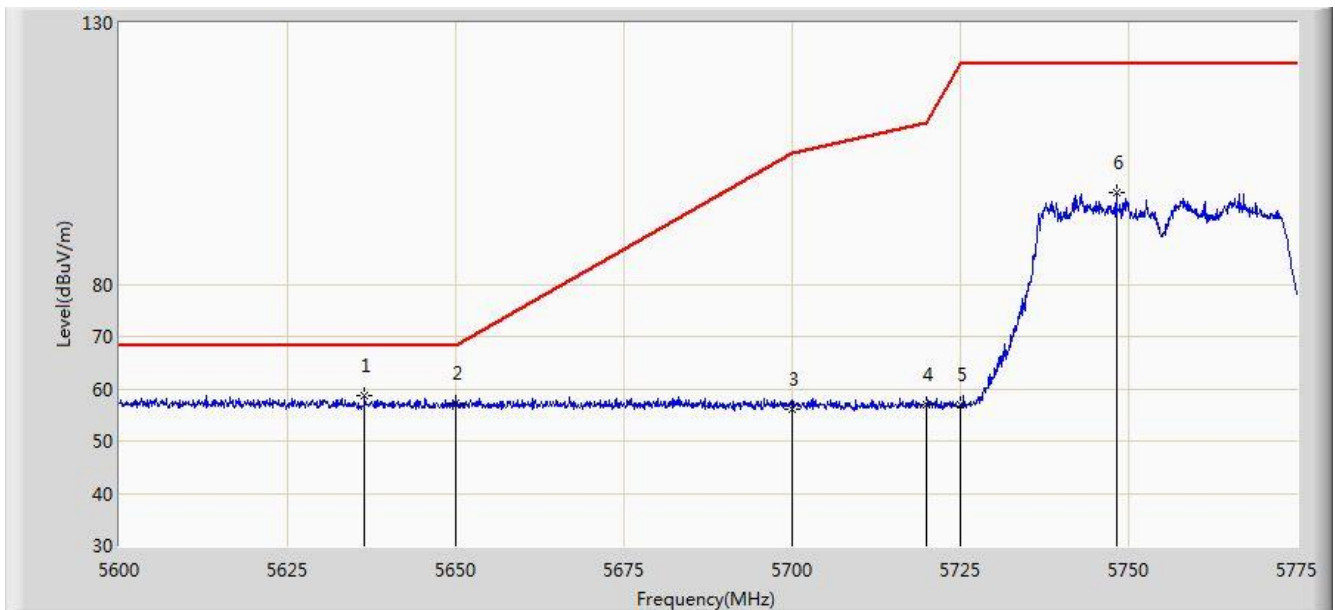


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5636.400	58.623	53.996	-9.577	68.200	4.627	PK
2			5650.000	57.347	52.676	-10.853	68.200	4.671	PK
3			5700.000	56.136	51.258	-49.064	105.200	4.878	PK
4			5720.000	56.864	51.867	-53.936	110.800	4.997	PK
5			5725.000	56.812	51.783	-65.388	122.200	5.029	PK
6			5748.138	97.619	92.446	N/A	N/A	5.173	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 22:59
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

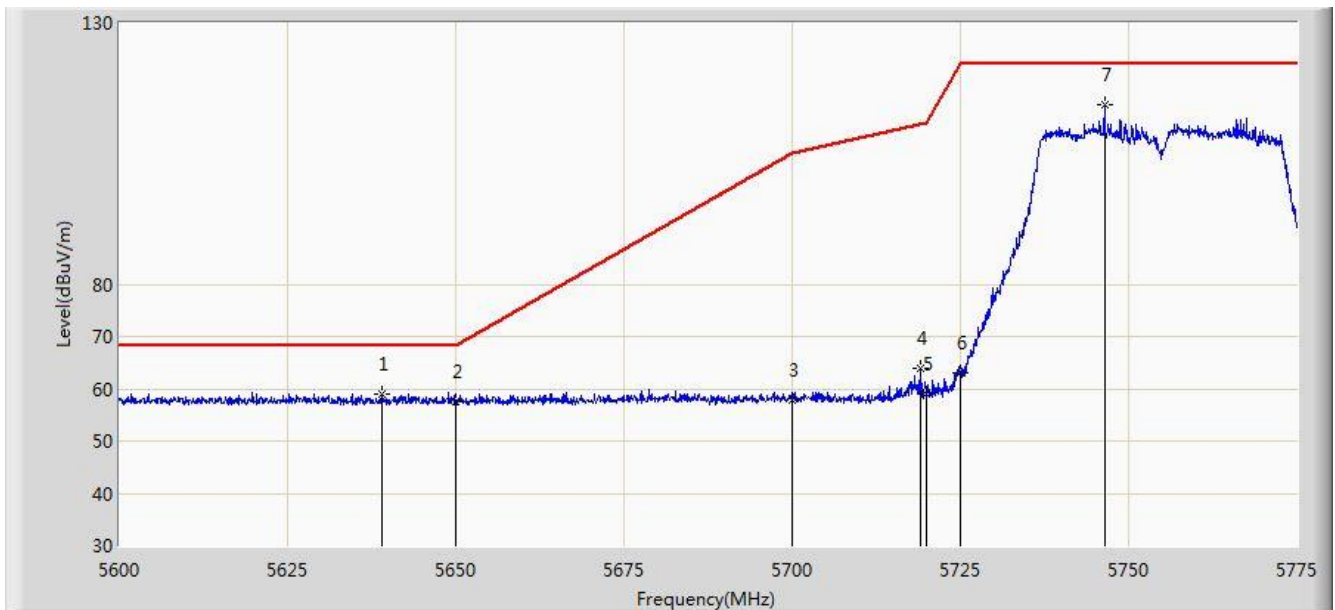


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5638.937	59.038	54.403	-9.162	68.200	4.635	PK
2			5650.000	57.674	53.003	-10.526	68.200	4.671	PK
3			5700.000	57.778	52.900	-47.422	105.200	4.878	PK
4			5719.087	63.857	58.866	-46.688	110.545	4.992	PK
5			5720.000	58.883	53.886	-51.917	110.800	4.997	PK
6			5725.000	63.066	58.037	-59.134	122.200	5.029	PK
7		*	5746.475	114.425	109.262	N/A	N/A	5.163	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 23:02
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

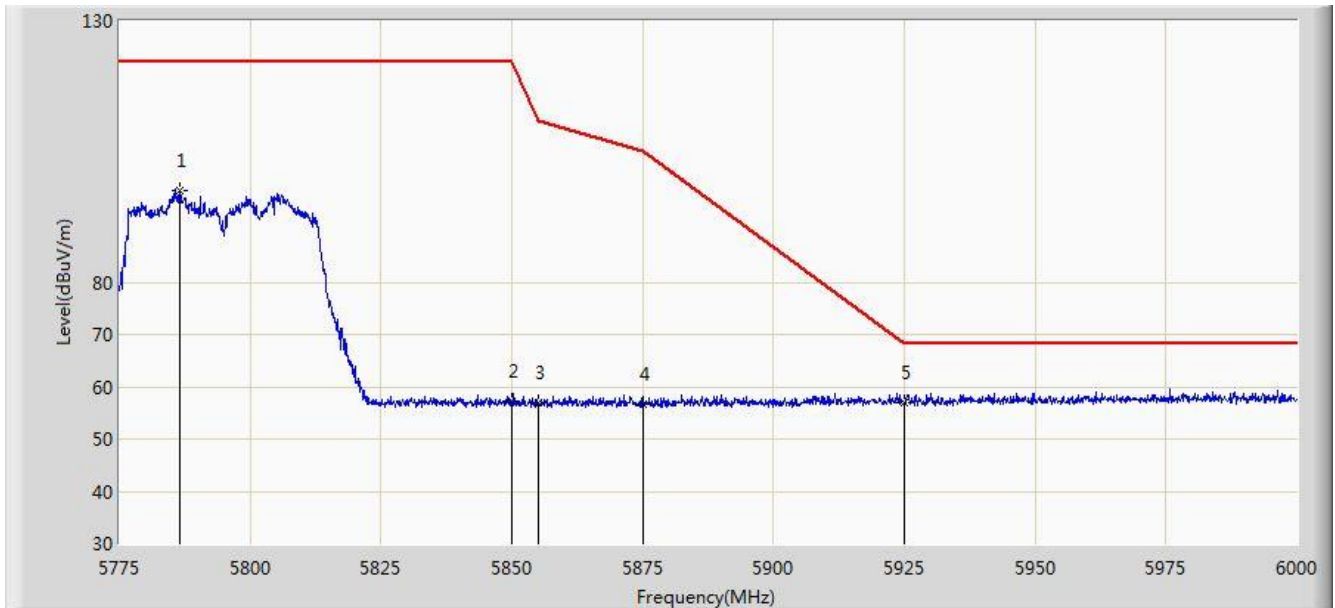


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5786.700	97.676	92.301	N/A	N/A	5.375	PK
2			5850.000	57.116	51.390	-65.084	122.200	5.726	PK
3			5855.000	56.953	51.207	-53.847	110.800	5.746	PK
4			5875.000	56.742	50.922	-48.458	105.200	5.820	PK
5		*	5925.000	56.959	50.993	-11.241	68.200	5.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 23:05
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

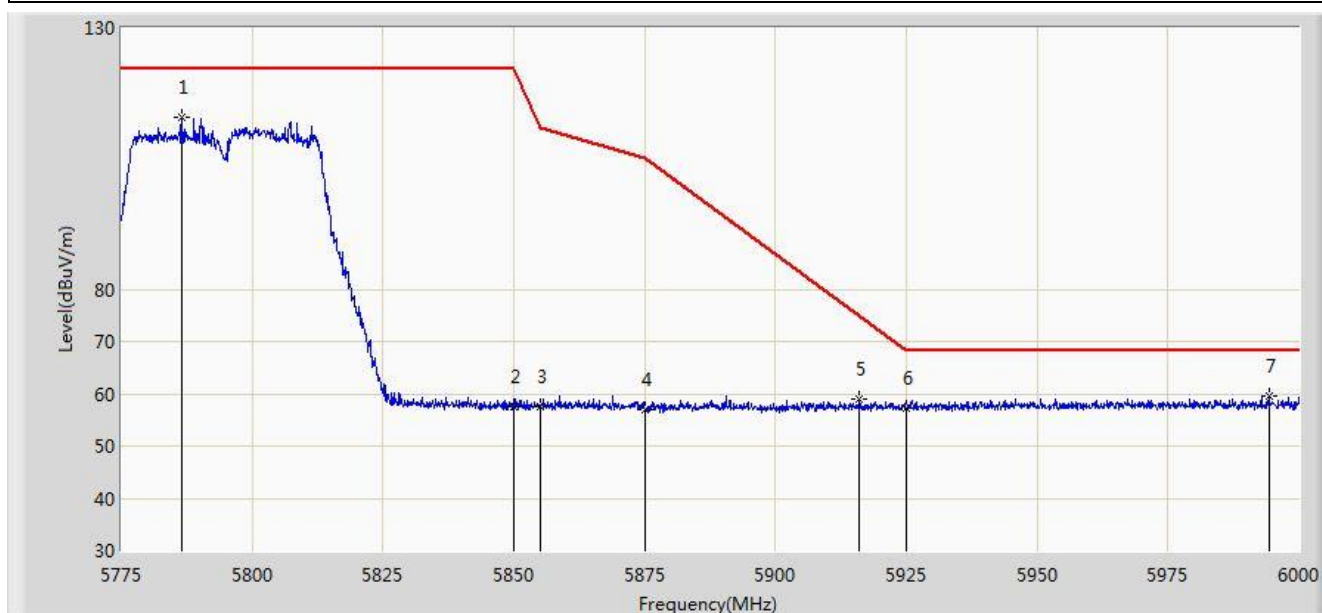


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5786.475	112.915	107.541	N/A	N/A	5.374	PK
2			5850.000	57.404	51.678	-64.796	122.200	5.726	PK
3			5855.000	57.513	51.767	-53.287	110.800	5.746	PK
4			5875.000	57.098	51.278	-48.102	105.200	5.820	PK
5			5916.075	59.060	53.115	-15.722	74.782	5.945	PK
6			5925.000	57.331	51.365	-10.869	68.200	5.967	PK
7		*	5994.375	59.666	53.565	-8.534	68.200	6.100	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 23:07
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

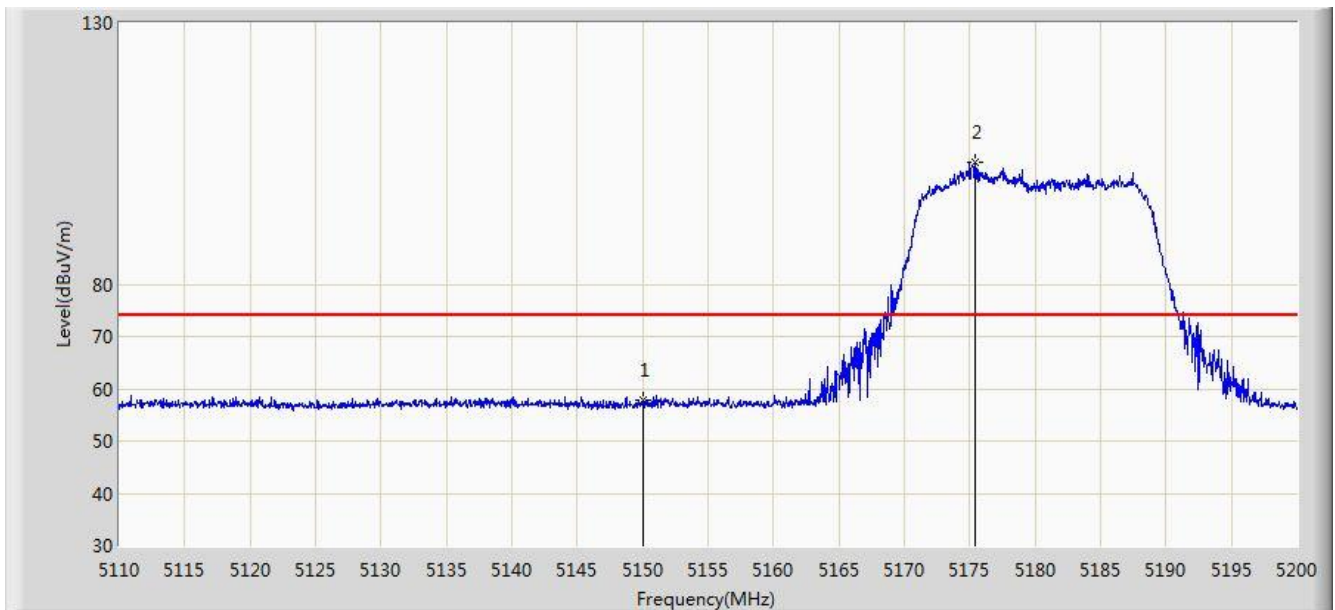


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	57.733	53.564	-16.267	74.000	4.170	PK
2		*	5175.385	103.456	99.371	N/A	N/A	4.085	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 23:12
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

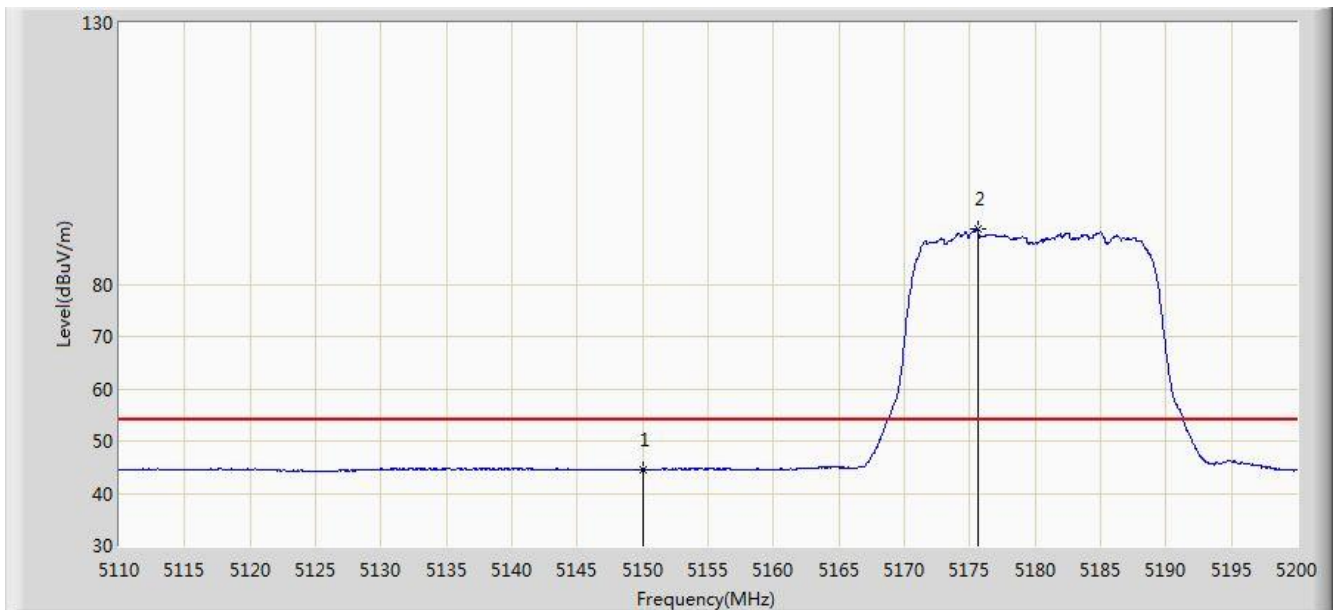


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.636	40.467	-9.364	54.000	4.170	AV
2		*	5175.610	90.702	86.618	N/A	N/A	4.085	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 23:14
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

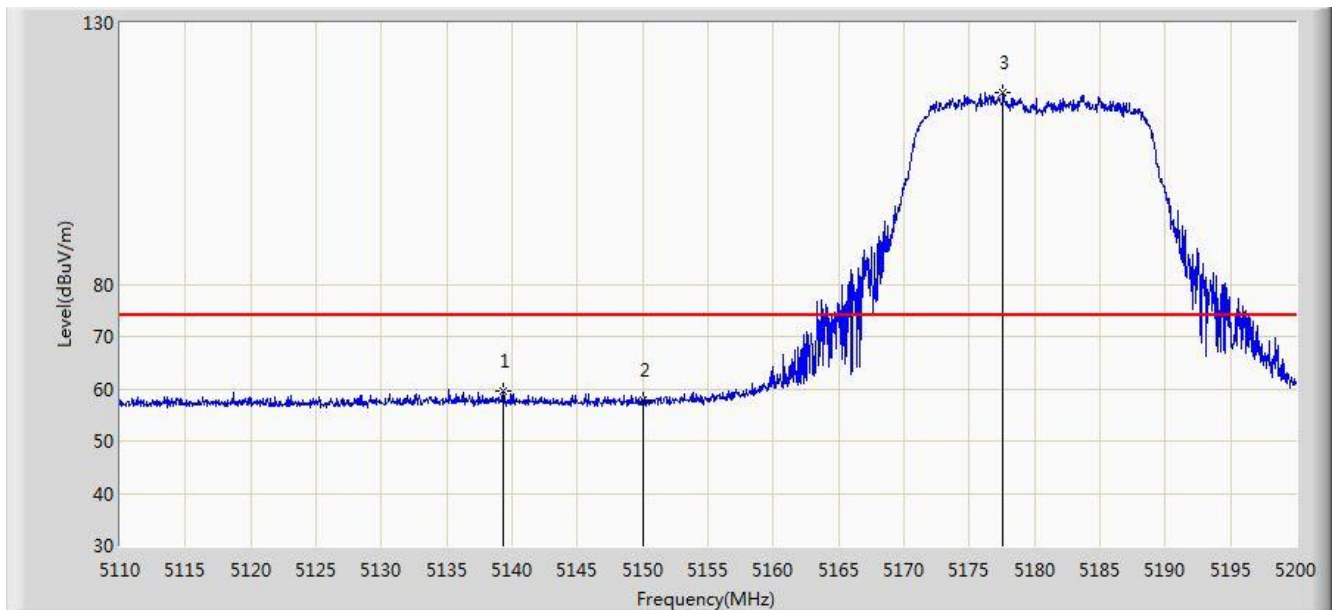


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.340	59.631	55.456	-14.369	74.000	4.176	PK
2			5150.000	57.717	53.548	-16.283	74.000	4.170	PK
3		*	5177.590	116.530	112.453	N/A	N/A	4.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 23:15
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

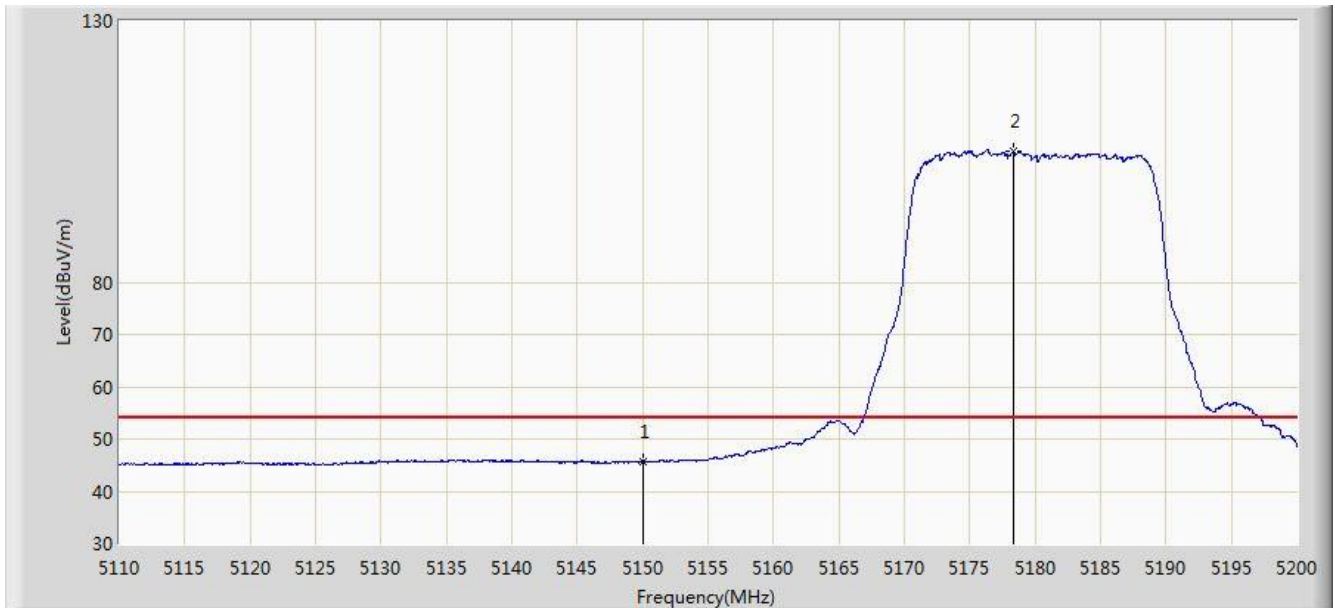


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.653	41.484	-8.347	54.000	4.170	AV
2		*	5178.400	105.091	101.016	N/A	N/A	4.074	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 23:43
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

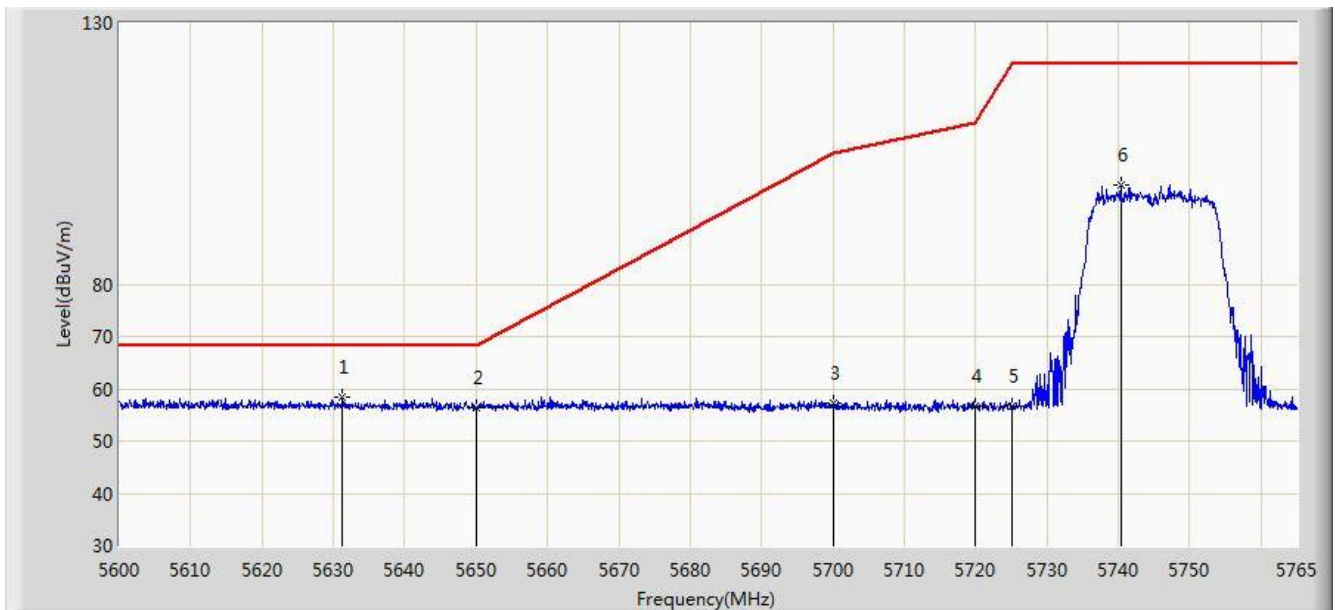


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5631.268	58.275	53.662	-9.925	68.200	4.613	PK
2			5650.000	56.460	51.789	-11.740	68.200	4.671	PK
3			5700.000	57.167	52.289	-48.033	105.200	4.878	PK
4			5720.000	56.649	51.652	-54.151	110.800	4.997	PK
5			5725.000	56.726	51.697	-65.474	122.200	5.029	PK
6			5740.415	98.869	93.742	N/A	N/A	5.127	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 23:46
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

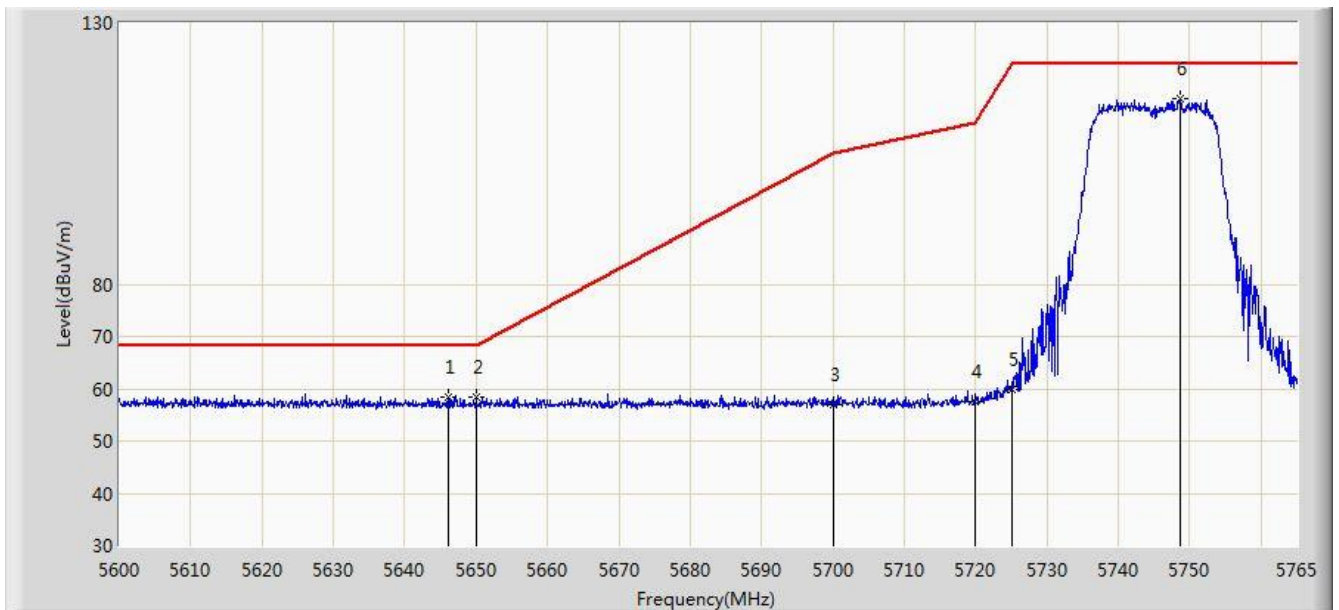


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5646.035	58.543	53.885	-9.657	68.200	4.658	PK
2			5650.000	58.297	53.626	-9.903	68.200	4.671	PK
3			5700.000	56.992	52.114	-48.208	105.200	4.878	PK
4			5720.000	57.626	52.629	-53.174	110.800	4.997	PK
5			5725.000	59.805	54.776	-62.395	122.200	5.029	PK
6		*	5748.748	115.641	110.465	N/A	N/A	5.177	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 23:48
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

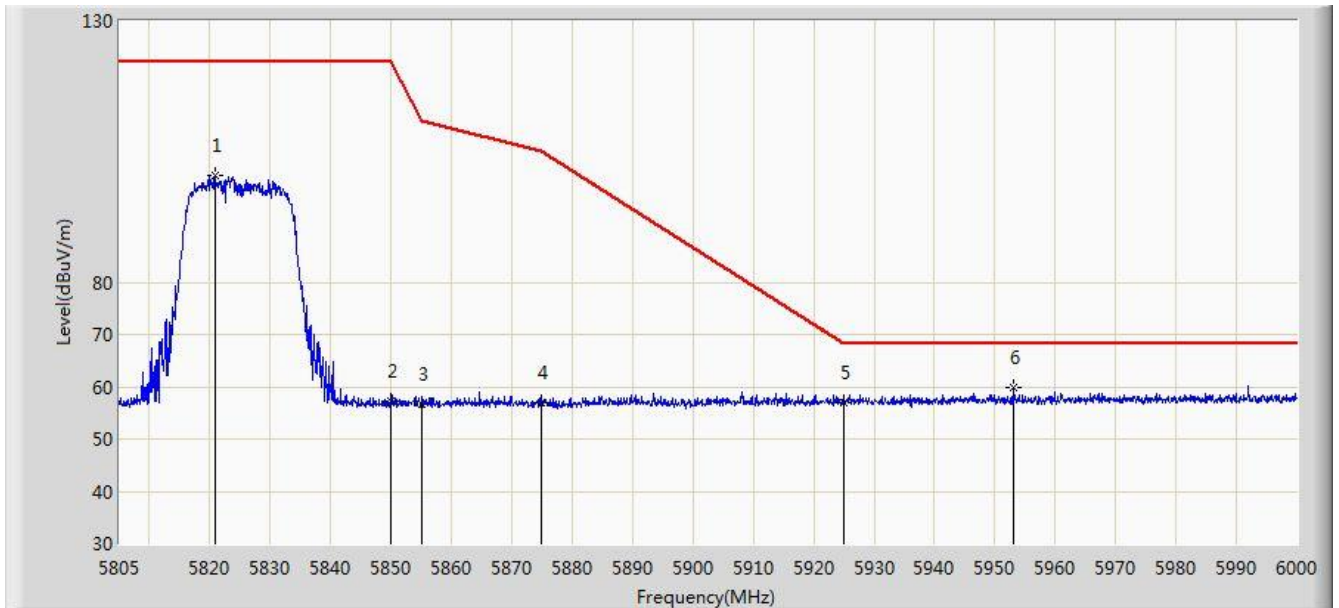


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5820.893	100.503	94.939	N/A	N/A	5.564	PK
2			5850.000	57.386	51.660	-64.814	122.200	5.726	PK
3			5855.000	56.528	50.782	-54.272	110.800	5.746	PK
4			5875.000	56.914	51.094	-48.286	105.200	5.820	PK
5			5925.000	57.038	51.072	-11.162	68.200	5.967	PK
6		*	5953.005	59.771	53.739	-8.429	68.200	6.032	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/06 - 23:52
Limit: NCC LP0002_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 57V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

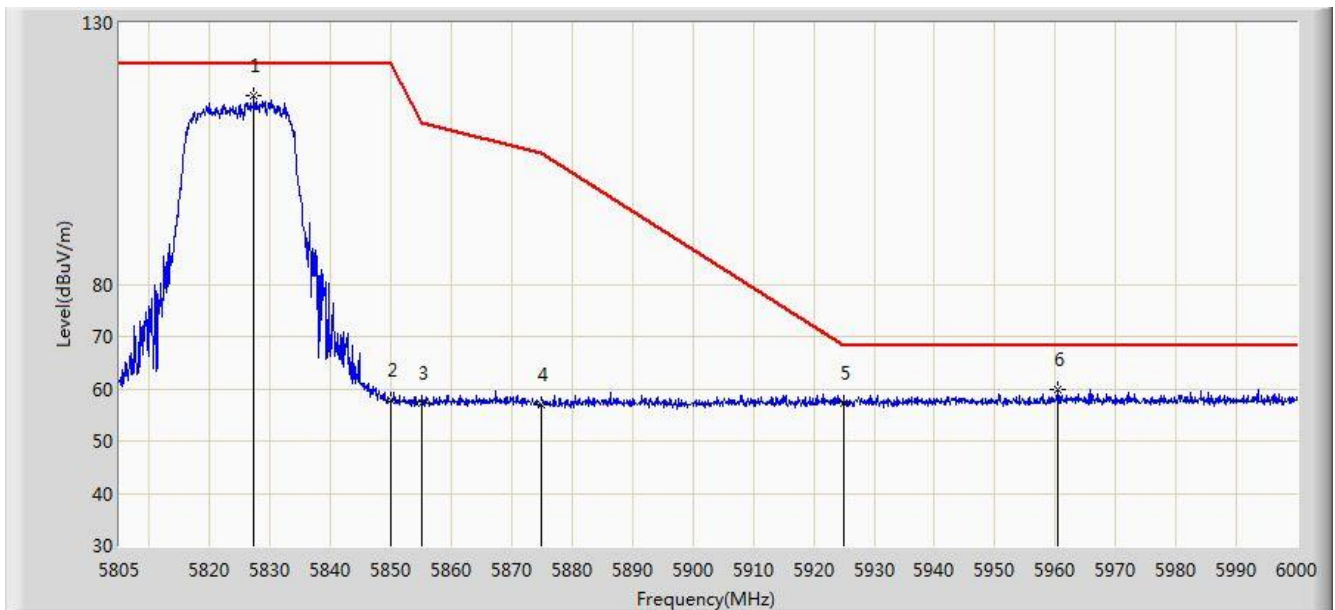

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5827.328	116.115	110.513	N/A	N/A	5.602	PK
2			5850.000	57.716	51.990	-64.484	122.200	5.726	PK
3			5855.000	57.343	51.597	-53.457	110.800	5.746	PK
4			5875.000	56.891	51.071	-48.309	105.200	5.820	PK
5			5925.000	57.302	51.336	-10.898	68.200	5.967	PK
6			5960.317	59.787	53.743	-8.413	68.200	6.044	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)