

低功率射頻器材技術規範測試報告

報告編號	RTBDYS-WTW-P20110911A
申請者	英屬蓋曼群島商防特網股份有限公司台灣分公司
產品名稱	Secured Wireless Access Point
型號	FAP-U234F
製造廠商	Fortinet. Inc.
商標或廠牌	Fortinet
該產品樣品試驗 依據之試驗標準	國家通訊傳播委員會低功率射頻器材技術規範 109 年 7 月 1 日訂定
試驗結果	合格

香港商立德國際商品試驗有限公司桃園分公司林口實驗室
日期 110 年 11 月 16 日

報告簽署人簽章:

林炳存



目 錄

報告發行紀錄	4
1 低功率射頻器材量測記錄表	6
2 一般敘述	7
2.1 待測設備	7
2.2 輔助測試之週邊設備描述	10
2.3 測試架構圖	10
3 適用規範	11
3.1 規範要求和參考	11
3.2 限制使用之頻帶	13
4 帶外發射之量測	14
4.1 適用標準	14
4.2 量測方法	14
4.3 量測儀器	15
4.4 測試配置	16
4.5 場強度之計算	17
4.6 量測結果	18
4.6.1 發射諧波	18
4.6.2 接收諧波	30
4.6.3 其它不必要之訊號	32
4.7 配置照片	33
4.8 帶外發射之量測 (傳導)	34
4.9 量測結果判定	36
5 電源線傳導干擾之量測	37
5.1 適用標準	37
5.2 量測方法	37
5.3 量測儀器	37
5.4 測試配置	38
5.5 干擾值之計算	38
5.6 量測結果	39
5.7 量測結果判定	40
5.8 配置照片	40
6 發射(6 dB)頻寬之要求	41
6.1 適用標準	41
6.2 量測方法	41
6.3 量測儀器	41
6.4 測試配置	41
6.5 量測結果	42
6.6 量測結果判定	43
7 峰值傳導輸出功率之量測	43
7.1 適用標準	43
7.2 量測方法	43
7.3 量測儀器	43
7.4 測試配置	43
7.5 量測結果	44
7.6 量測結果判定	44

8	功率頻譜密度之量測	45
8.1	適用標準	45
8.2	量測方法	45
8.3	量測儀器	45
8.4	測試配置	45
8.5	量測結果	46
8.6	量測結果判定	47
9	檢測實驗室基本資料	47

報告發行紀錄

Issue No.	Description	Date Issued
RTBDYS-WTW-P20110911A	Original release	110 年 11 月 16 日

證 明 書

發行日期：110 年 11 月 16 日

產 品 名 稱：Secured Wireless Access Point
廠 牌：Fortinet
型 號：FAP-U234F
申 請 者：英屬蓋曼群島商防特網股份有限公司台灣分公司
量 測 規 範：低功率射頻器材技術規範 LP0002 (訂定日期：109 年 7 月 1 日)
ANSI C63.10-2013

香港商立德國際商品試驗有限公司桃園分公司在此證明上述待測設備樣品一組(型號：FAP-U234F)，收件日期 109 年 11 月 29 日，於 109 年 12 月 25 日至 109 年 12 月 30 日，已在本公司的標準測試場地完成量測。報告中所描述之測試結果和待測設備的架構組合，均根據樣品實際的量測情況作詳實的記錄。

立德桃園分公司依“低功率射頻器材技術規範”及“電信管制射頻器材審驗管理辦法”製作測試結果報告。

特 此 證 明 ！

報告製作者：



王秀眉 / 專員

， 日 期： 110 年 11 月 16 日

審 核 者：



林炳存/專案工程師

， 日 期： 110 年 11 月 16 日

香港商立德國際商品試驗有限公司桃園分公司

實驗室地址：新北市林口區嘉寶里 14 鄰 47-2 號

此份報告不得摘錄複製，除全份複製外，需經實驗室書面同意。



1 低功率射頻器材量測記錄表

申請廠商：英屬蓋曼群島商防特網股份有限公司台灣分公司

製造廠商：Fortinet, Inc.

申請廠商地址：臺北市內湖區湖元里行愛路 176 號 2 樓

廠牌：Fortinet

產品名稱：Secured Wireless Access Point

型號：FAP-U234F

量測單位名稱：香港商立德國際商品試驗有限公司桃園分公司

林口實驗室華亞檢測部

量測單位地址：桃園市龜山區文化里華亞二路 19 號

量測單位認可編號：TAF 2021 (9kHz~40GHz)

量測規範：低功率射頻器材技術規範 LP0002 (訂定日期：109 年 7 月 1 日)

ANSI C63.10-2013

Bluetooth LE 頻段概要

項次	量測項目	規 範	量測結果判定
1	帶外發射	低功率射頻器材技術規範 4.10.1.5 節	合格
2	電源線傳導干擾	低功率射頻器材技術規範 3.3 節	合格
3	6 dB 頻寬	低功率射頻器材技術規範 4.10.1.6 節	合格
4	峰值傳導輸出功率	低功率射頻器材技術規範 4.10.1.2 節	合格
5	功率頻譜密度	低功率射頻器材技術規範 4.10.1.6 節	合格

備註：量測結果之判定不考慮量測不確定度的貢獻。

最大暴露允許值(Maximum Permissible Exposure, MPE)

項次	量測項目	規 範	量測結果判定
1	電波暴露量	低功率射頻器材技術規範 6.20.2 節	合格 (註 2)

備註：

1. 量測結果之判定不考慮量測不確定度的貢獻。
2. 請參考 WLAN 報告 BV CPS No.: RTBDYS-WTW-P20110911A-2。

2 一般敘述

2.1 待測設備

產品名稱：	Secured Wireless Access Point
型號：	FAP-U234F
額定電源：	54Vdc from POE
調變方式：	GFSK
傳輸速率：	Bluetooth LE 4.0: 1Mbps Bluetooth LE 5.0: 2Mbps
載波頻率：	2402 ~ 2480MHz
頻道數：	40
發射功率：	Bluetooth LE 4.0: 10.51 dBm Bluetooth LE 5.0: 10.49 dBm
天線種類：	見註 1
電源線類別：	NA
信號線類別：	NA
配件：	見註 2
測試軟體名稱/版本：	Teraterm / V4.107

註 1: 此待測設備搭配測試的天線，其資料如下：

No.	Type	Brand	Model	Connector	Gain (dBi)						Remark
					2400MHz	2450MHz	2500MHz	5150MHz	5500MHz	5850MHz	
1	Patch Array	Senao	5718A0560300	IPEX	9.45	10.15	9.77	-	-	-	2G traffic radio (Radio 1)
2	Patch Array	Senao	5718A0560300	IPEX	9.21	10.12	10.33	-	-	-	
3	Patch Array	Senao	5718A0561300	IPEX	-	-	-	9.55	10.23	10.13	5G traffic radio (Radio 1)
4	Patch Array	Senao	5718A0561300	IPEX	-	-	-	9.87	10.39	10.82	
5	Patch Array	Senao	5718A0562300	IPEX	-	-	-	9.52	10.29	10.16	5G traffic radio (Radio 2)
6	Patch Array	Senao	5718A0562300	IPEX	-	-	-	9.79	10.21	10.54	
7	Dipole	Senao	5718A0563300	IPEX	4.21	4.23	4.64	4.56	4.00	4.12	Scanning radio (Radio 3)
8	Dipole	Senao	5718A0564300	IPEX	3.28	4.33	4.05	4.51	4.45	4.91	
9	Dipole	Senao	5718A0565300	IPEX	3.68	4.22	4.00	-	-	-	BT LE / Zigbee

*上述天線的規格資訊由申請者聲明，實驗室不承擔任何責任。

註 2: 此產品搭配使用之配件如下：

*本案經申請者提供隨貨配件與實驗室提供的測試配件併同檢測。產品及隨貨配件之照片請參照 BV CPS 報告編號：BDYS-WTW-P20110911，測試設置照片請參照 BV CPS 報告編號：RTBDYS-WTW-P20110911A_TSup。

隨貨配件			
配件	廠牌/製造商	型號	規格
POE – 隨貨配件	SENAO	EPA5006GPR-4P	Input: 100-240Vac, 50-60Hz, 0.8A Output: 54Vdc, 0.6A
AC Cord 500mm	I-SHENG	SP-30+IS-034	0.5M, non-shielding
WIRE GEN AWG10 1.75m GRN LFP	BO YAO	7021A0021810	1.75M, non-shielding

註 3: 此報告中，場強輻射量經過評估後以下列測試模式進行最終量測。

載波頻率	量測項目	發射	接收
場強輻射量測	1GHz 以上量測	Bluetooth LE 4.0: Ch 0, 19, 39 Bluetooth LE 5.0: Ch 0, 19, 39	Bluetooth LE 4.0: Ch 19
	其它不必要之訊號	Bluetooth LE 4.0: Ch 19	
電源線傳導干擾		Bluetooth LE 4.0: Ch 19	

註 4: The simultaneous operation mode was determined by client.

No	Mode
1	2G traffic radio (Radio 1) + 5GHz traffic radio (Radio 2) + 5.0G Scanning radio (Radio 3) + BLE
2	5G traffic radio (Radio 1) + 5GHz traffic radio (Radio 2) + 2.4G Scanning radio (Radio 3) + BLE
3	5G traffic radio (Radio 1) + 5GHz traffic radio (Radio 2) + 5.0G Scanning radio (Radio 3) + BLE
4	2G traffic radio (Radio 1) + 5GHz traffic radio (Radio 2) + 5.0G Scanning radio (Radio 3) + Zigbee
5	5G traffic radio (Radio 1) + 5GHz traffic radio (Radio 2) + 2.4G Scanning radio (Radio 3) + Zigbee
6	5G traffic radio (Radio 1) + 5GHz traffic radio (Radio 2) + 5.0G Scanning radio (Radio 3) + Zigbee

* 5GHz traffic radio (Radio 2) and 5G Scanning radio (Radio 3) cannot transmit in the same band at same time. 2G traffic radio (Radio 1) and 2G Scanning radio (Radio 3) cannot transmit at same time.

* 5GHz traffic radio (Radio1) and 5GHz traffic radio (Radio2) cannot transmit at the same time in the UNII-3 band.


* Zigbee and BT technologies cannot transmit at same time.

* Spurious emission of the simultaneous operation has been evaluated and no non-compliance was found.

註 5: 此待測設備，經預測試三個正交軸方位評估測試擺設方式：平躺、側放、垂直，以垂直為最大干擾值之位置，故以此最大干擾值之擺放方式進行最終量測，並將測試結果紀錄。

註 6: Duty cycle of test signal.

Duty cycle of test signal is 100%.

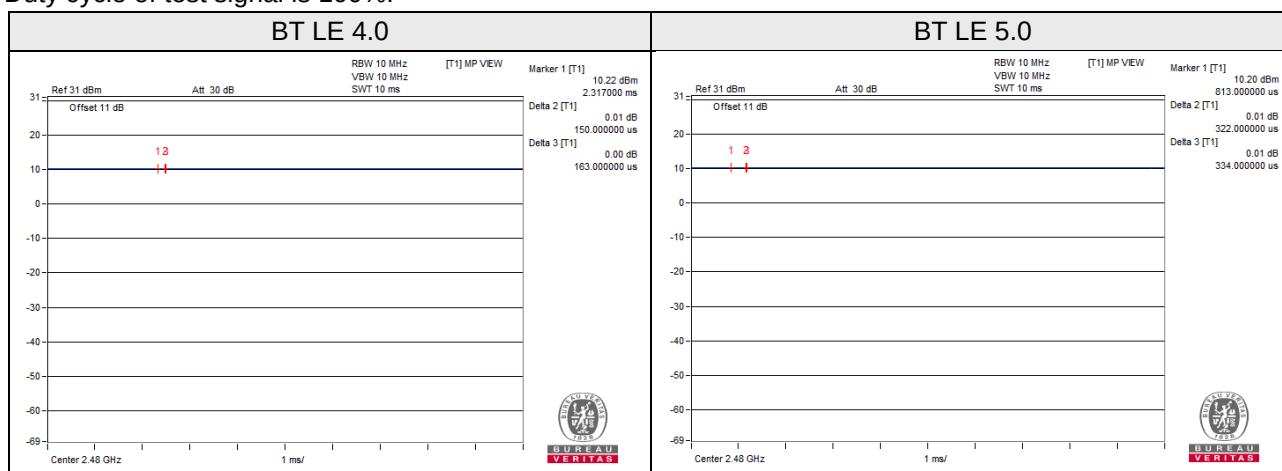

註 7: Power Setting as below.

	BT LE 4.0	BT LE 5.0
CH 0	100	100
CH 19	100	100
CH 39	100	100

此裝置各頻道的中心頻率如下：

Bluetooth LE 頻段：

頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

詳細之規格請參考使用說明書，產品的照片請參照BV CPS報告編號：BDYS-WTW-P20110911。

2.2 輔助測試之週邊設備描述

待測設備於受測時均接上其所屬的配件或一般用途之相關設備；下列輔助設備或配件測試中所使用的配備，以形成一個代表待測物實際運作的受測系統。


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	實驗室提供
B.	Load	NA	NA	NA	NA	實驗室提供 Placed under test table
C.	POE	SENAO	EPA5006GPR-4P	NA	NA	隨貨配件 申請者提供

Note:

- All power cords of the above support units are non-shielded (1.8m).
- Item A acted as a communication partner to transfer data.
- 本案器材以申請者切結提供的隨貨配件，及實驗室提供的測試配件併同檢測。不提供隨貨配件之照片請參閱附件。(BV CPS 報告編號: BDYS-WTW-P21040031_SU)

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN	1	1.5	N	0	RJ45, Cat5e 實驗室提供
2.	LAN	1	1.5	N	0	RJ45, Cat5e 實驗室提供
3.	LAN	1	6	N	0	RJ45, Cat5e 實驗室提供
4.	Console cable	1	1.5	N	0	實驗室提供

2.3 測試架構圖

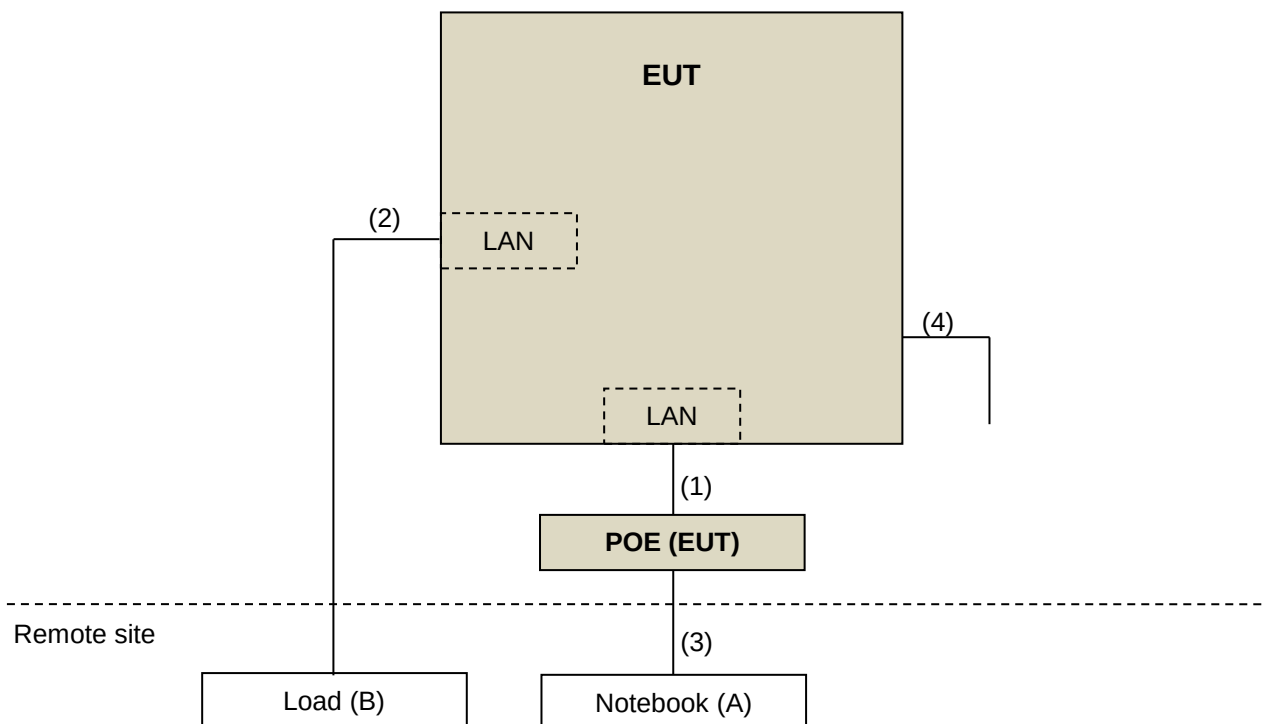

3 適用規範

3.1 規範要求和參考

(1) 傳導之規定

依據國家通訊傳播委員會低功率射頻器材技術規範之 3.3 節，電源傳導干擾之限制要求如下：

頻率(MHz)	傳導限制值 (dBuV)	
	準峰值(Quasi-peak)	平均值(Average)
0.15-0.5	66-56(註)	56-46(註)
0.5-5	56	46
5-30	60	50

(註)：隨頻率之對數遞減。

(2) 帶外發射之規定

依據國家通訊傳播委員會低功率射頻器材技術規範 4.10.1.5 節之要求，操作頻帶範圍外之任意 100 kHz 內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 kHz 內的射頻功率，其衰減值限制如下：(1) 輸出功率以附件二之峰值輸出功率方式測量者，至少須衰減 20 dB，可使用射頻傳導或輻射方式測量。(2) 輸出功率以 4.10.1.2(1)(C)之最大傳導輸出功率測量方式者，至少須衰減 30 dB。此外，落於 3.5 禁用頻段之輻射發射，應符合 3.6 之規定。

頻率(MHz)	電場強度(微伏特/公尺, uV/m)	測距(公尺)
$0.009 \leq f \leq 0.490$	$2,400/f(\text{kHz})$	300
$0.490 < f \leq 1.705$	$24,000/f(\text{kHz})$	30
$1.705 < f < 30$	30	30
$30 \leq f \leq 88$	100	3
$88 < f \leq 216$	150	3
$216 < f \leq 960$	200	3
$960 < f$	500	3

(3) 天線之規定

天線規格不受第 3.2 節規定之限制。

(4) 天線增益之要求

低功率發射機，依據國家通訊傳播委員會低功率射頻器材技術規範 4.10.1.3 節之規定如下：

- (A) 進行固定式點對點操作時，其發射天線之方向性增益超過 6 dBi，每超過 3 dBi，最大傳導輸出功率限制值應降低 1 dB。
- (B) 天線以多向波束發射方式(含同時發射或循序發射)將訊號導向多個接收機或接收機群組時，應符合下列規定：
- (a) 非同時發射多向波束者，所有載波或頻道傳輸至所有天線陣列或陣列群之總和傳導輸出功率應符合 4.10.1.2 之功率限制值。如天線/天線陣列群之方向性增益超過 6 dBi，每超過 3 dBi，總和傳導輸出功率限制值應降低 1 dB。方向性增益值應計算如下：
 - (i) 方向性增益值 = $10\log(\text{天線陣列之單元數目}) + \text{各單元中最高之方向性增益值}$ 。
 - (ii) 天線陣列間之遮蔽效應或波束干涉損失能充分佐證時，方向性增益得低於(i)計算數值。
 - (b) 同時發射多向波束於相同或不同頻道者，其每一波束功率應符合(a)之功率限制值。如發射波束有重疊現象，功率應降低，以確保總和傳導輸出功率符合(a)之限制值。同時發射的所有波束總和傳導輸出功率不大於(a)總和傳導輸出功率限制值加 8 dB。方向性增益值計算同(a)。
 - (c) 發射機之天線具備單向波束功能者，應符合(1)(A)及(3)後段之規定。

除(A)及(B)外，使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率限制值。

(5) 6dB 頻寬之要求

對使用數位調變技術(digital modulation techniques)系統之低功率發射機，依據國家通訊傳播委員會低功率射頻器材技術規範 4.10.1.6 節之規定，6dB 頻寬至少應有 500kHz。

(6) 傳導輸出功率之要求

依據國家通訊傳播委員會低功率射頻器材技術規範 4.10.1.2 節之規定：

數位調變技術系統：1 W(含)以下。

(7) 功率頻譜密度之要求

依據國家通訊傳播委員會低功率射頻器材技術規範 4.10.1.6 節之規定，在使用頻率範圍之任一 3 kHz 頻寬內，由發射機傳導至天線之功率頻譜密度在任意傳輸期間內，皆小於或等於 8 毫分貝(dBm)，且應依 4.10.1.3 之方式降低功率頻譜密度限制值

(8) 電波暴露量之評估

依據國家通訊傳播委員會低功率射頻器材技術規範 6.20.2 節之規定，若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure, MPE)以證明其符電波暴露量之要求。

限制值如下：

(1) 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3 - 3.0	614	1.63	*100	6
3 - 30	1842/f	4.89/f	*900/f ²	6
30 - 300	61.4	0.163	1.0	6
300 - 1,500	---	---	f/300	6
1,500 - 100,000	---	---	5.0	6

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：百萬赫(MHz)。

(2) 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3 - 1.34	614	1.63	*100	30
1.34 - 30	824/f	2.19/f	*180/f ²	30
30 - 300	27.5	0.073	0.2	30
300 - 1,500	---	---	f/1500	30
1,500 - 100,000	---	---	1.0	30

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：百萬赫(MHz)。

參考國際標準指南

KDB 558074

3.2 限制使用之頻帶

除本規範另有規定外，任何低功率射頻器材之主波皆不得使用下表所列各頻段之頻率；低功率射頻器材落於下表所列頻段之混附發射，其電場強度必須符合 3.6 之限制規定。

頻率(兆赫)	頻率(兆赫)	頻率(兆赫)
0.090~0.110	240.00~285.00	3332.0~3339.0
0.490~0.510	322.00~335.40	3345.8~3358.0
2.172~2.198	399.90~410.00	3500.0~4400.0
3.013~3.033	485.00~510.00	4500.0~5250.0
4.115~4.198	608.00~614.00	5350.0~5460.0
5.670~5.690	703.00~748.00	7250.0~7750.0
6.200~6.300	758.00~803.00	8025.0~8500.0
8.230~8.400	825.00~915.00	9000.0~9200.0
12.265~12.600	930.00~1240.0	9300.0~9500.0
13.340~13.430	1300.0~1427.0	10600~12700
14.965~15.020	1435.0~1626.5	13250~13400
16.700~16.755	1660.0~1785.0	14470~14500
19.965~20.020	1805.0~1880.0	15350~16200
25.500~25.700	1885.0~1900.0	17700~21400
37.475~38.275	1905.0~1985.0	22010~23120
73.500~75.400	2010.0~2025.0	23600~24000
108.00~138.00	2110.0~2170.0	31200~31800
149.90~150.05	2200.0~2300.0	36430~36500
156.70~156.90	2310.0~2390.0	38600 以上
162.01~167.17	2483.5~2900.0	
167.72~173.20	3260.0~3267.0	

4 帶外發射之量測

4.1 適用標準

請見本報告3.1節第2項的規定。

4.2 量測方法

在電波暗室，將待測物置於0.8米高的非金屬桌面，使其操作在工作狀態。接收天線置於3米距離。桌面要360度旋轉，另外接收天線從離地1米至4米升降變化，以找出最大的輻射電場強度，接收天線分別置於水平、垂直極化各執行測試一次。

Note: 對於 1GHz 以上場強輻射的測試，待測物則置於1.5米高的非金屬桌面。

4.3 量測儀器


儀器名稱 (廠牌/製造商)	型號	序號	校正日期	下次校正日期
Test Receiver ROHDE & SCHWARZ	ESR3	102579	Jul. 07, 2020	Jul. 06, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 09, 2020	Jun. 08, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSV40	100980	Apr. 20, 2020	Apr. 19, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 04, 2020	Nov. 03, 2021
HORN Antenna SCHWARZBECK	9120D	209	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 16, 2020	Aug. 15, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 23, 2020	Mar. 22, 2021
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH3-01	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM- SM-8000	Cable-CH3-03 (309224+170907)	Aug. 16, 2020	Aug. 15, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55 190004/MY551900 07/MY55210005	Jul. 13, 2020	Jul. 12, 2021

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


Measurement	Frequency	Uncertainty
Radiated emissions	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~1000MHz	3.87 dB
	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

4.4 測試配置


<Frequency Range below 30MHz>

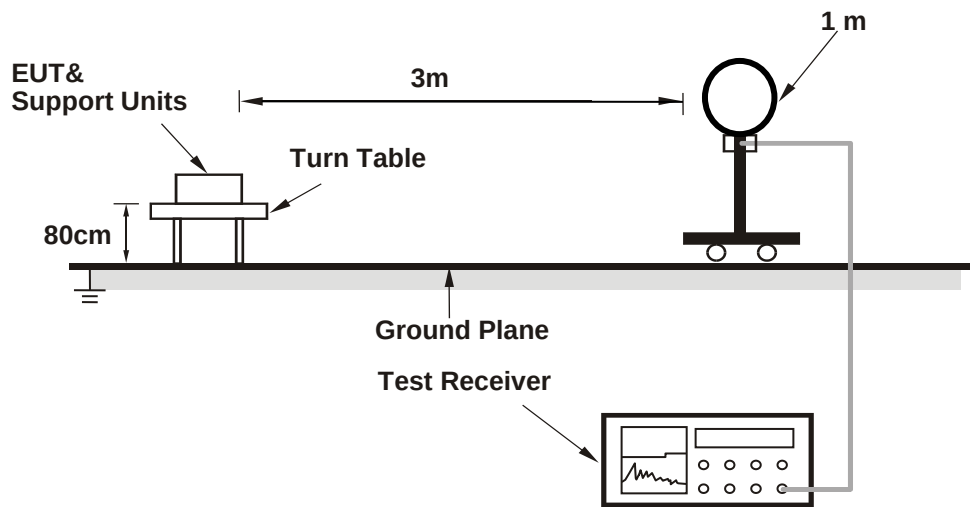

<Frequency Range below 1GHz>

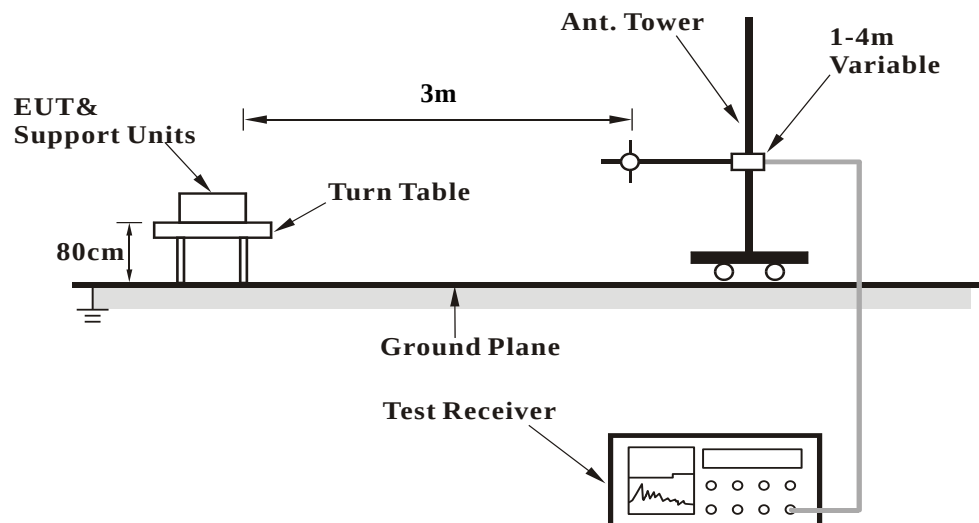

<Frequency Range above 1GHz>

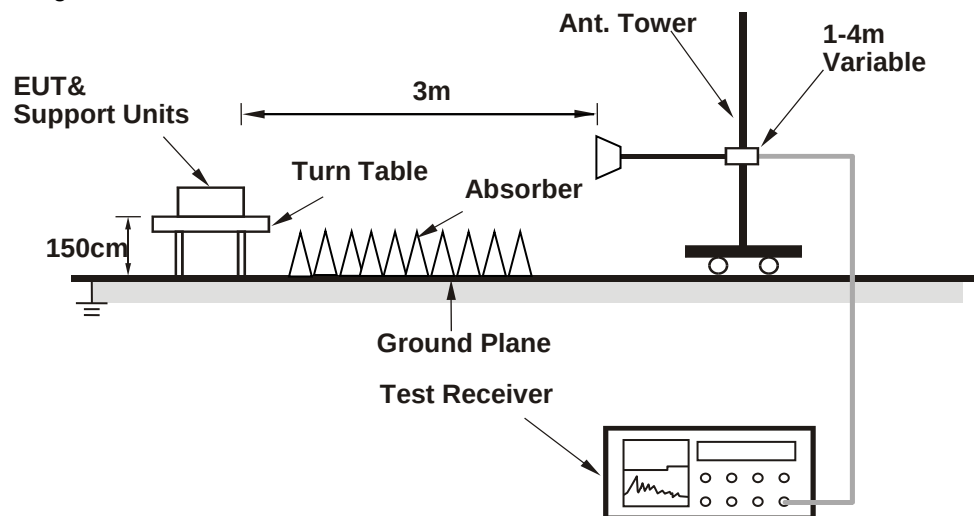

4.5 場強度之計算

場強之計算公式如下：

結果值Emission level (dBuV/m)=機器讀值 Raw Value (dBuV) +校正因子Correction Factor (dB/m)

餘裕度Margin(dB)= 結果值Emission level (dBuV/m)-限制值Limit value (dBuV/m)

量測結果請見下頁。

4.6 量測結果


4.6.1 發射諧波

操作模式：	發射 BT_LE-4.0	調變技術：	GFSK
基本波頻率：	CH 0：2402 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.6 PK	74.0	-8.4	1.59 H	15	31.2	34.4
2	2390.00	48.6 AV	54.0	-5.4	1.59 H	15	14.2	34.4
3	*2402.00	104.5 PK			1.49 H	9	70.2	34.3
4	*2402.00	103.3 AV			1.49 H	9	69.0	34.3
5	4804.00	48.1 PK	74.0	-25.9	1.75 H	307	42.0	6.1
6	4804.00	34.6 AV	54.0	-19.4	1.75 H	307	28.5	6.1
7	#7206.00	-	-	-	-	-	-	-
8	#9608.00	-	-	-	-	-	-	-
9	12010.00	-	-	-	-	-	-	-
10	#14412.00	-	-	-	-	-	-	-
11	#16814.00	-	-	-	-	-	-	-
12	19216.00	-	-	-	-	-	-	-
13	#21618.00	-	-	-	-	-	-	-
14	#24020.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

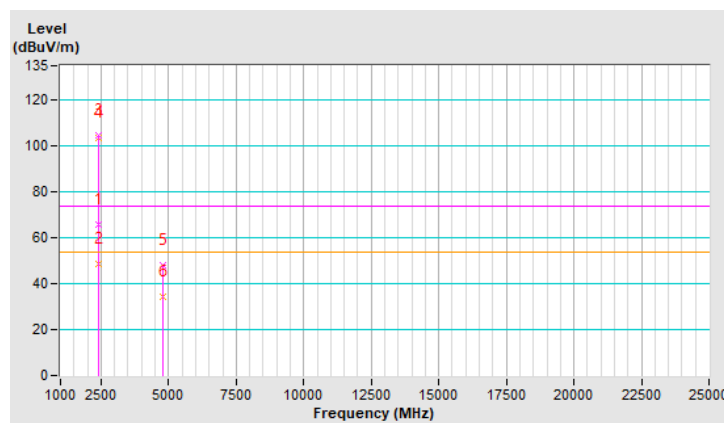


操作模式：	發射 BT_LE-4.0	調變技術：	GFSK
基本波頻率：	CH 0：2402 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.1 PK	74.0	-12.9	1.63 V	331	26.7	34.4
2	2390.00	48.4 AV	54.0	-5.6	1.63 V	331	14.0	34.4
3	*2402.00	101.2 PK			1.79 V	340	66.9	34.3
4	*2402.00	100.0 AV			1.79 V	340	65.7	34.3
5	4804.00	48.5 PK	74.0	-25.5	1.73 V	341	42.4	6.1
6	4804.00	35.7 AV	54.0	-18.3	1.73 V	341	29.6	6.1
7	#7206.00	-	-	-	-	-	-	-
8	#9608.00	-	-	-	-	-	-	-
9	12010.00	-	-	-	-	-	-	-
10	#14412.00	-	-	-	-	-	-	-
11	#16814.00	-	-	-	-	-	-	-
12	19216.00	-	-	-	-	-	-	-
13	#21618.00	-	-	-	-	-	-	-
14	#24020.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

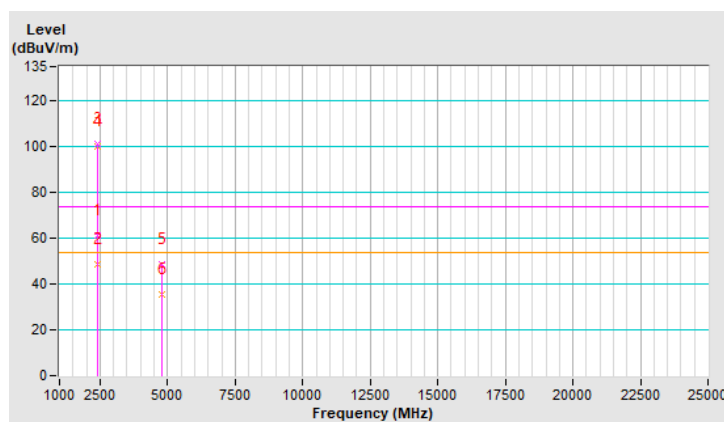


操作模式：	發射 BT_LE-4.0	調變技術：	GFSK
基本波頻率：	CH 19 : 2440 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	106.5 PK			2.28 H	334	72.2	34.3
2	*2440.00	105.2 AV			2.28 H	334	70.9	34.3
3	4880.00	48.6 PK	74.0	-25.4	1.85 H	320	42.5	6.1
4	4880.00	34.9 AV	54.0	-19.1	1.85 H	320	28.8	6.1
5	7320.00	-	-	-	-	-	-	-
6	#9760.00	-	-	-	-	-	-	-
7	12200.00	-	-	-	-	-	-	-
8	#14640.00	-	-	-	-	-	-	-
9	#17080.00	-	-	-	-	-	-	-
10	19520.00	-	-	-	-	-	-	-
11	#21960.00	-	-	-	-	-	-	-
12	#24400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

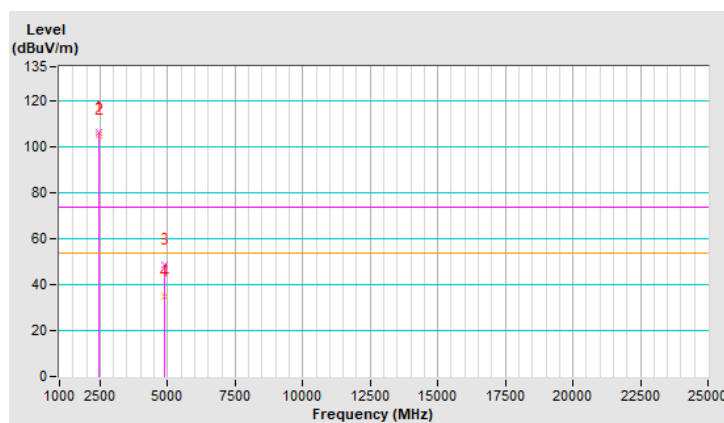


操作模式：	發射 BT_LE-4.0	調變技術：	GFSK
基本波頻率：	CH 19 : 2440 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	103.4 PK			1.72 V	350	69.1	34.3
2	*2440.00	101.8 AV			1.72 V	350	67.5	34.3
3	4880.00	49.3 PK	74.0	-24.7	1.82 V	350	43.2	6.1
4	4880.00	36.1 AV	54.0	-17.9	1.82 V	350	30.0	6.1
5	7320.00	-	-	-	-	-	-	-
6	#9760.00	-	-	-	-	-	-	-
7	12200.00	-	-	-	-	-	-	-
8	#14640.00	-	-	-	-	-	-	-
9	#17080.00	-	-	-	-	-	-	-
10	19520.00	-	-	-	-	-	-	-
11	#21960.00	-	-	-	-	-	-	-
12	#24400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

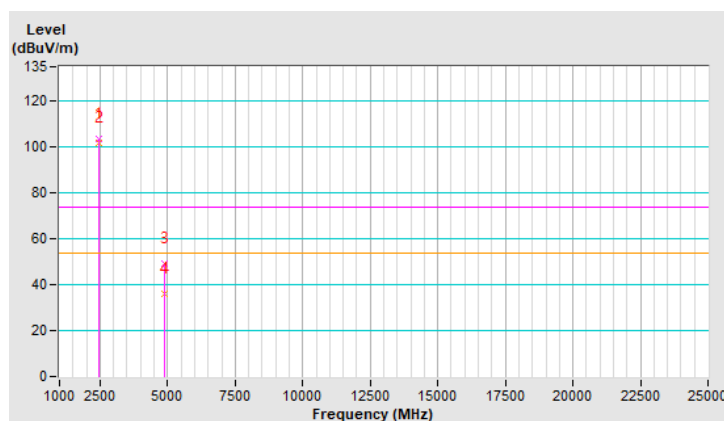


操作模式：	發射 BT_LE-4.0	調變技術：	GFSK
基本波頻率：	CH 39：2480 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	104.9 PK			2.43 H	329	70.5	34.4
2	*2480.00	103.6 AV			2.43 H	329	69.2	34.4
3	2483.50	64.5 PK	74.0	-9.5	2.22 H	339	30.1	34.4
4	2483.50	49.6 AV	54.0	-4.4	2.22 H	339	15.2	34.4
5	4960.00	48.8 PK	74.0	-25.2	1.76 H	332	42.5	6.3
6	4960.00	35.3 AV	54.0	-18.7	1.76 H	332	29.0	6.3
7	7440.00	-	-	-	-	-	-	-
8	#9920.00	-	-	-	-	-	-	-
9	12400.00	-	-	-	-	-	-	-
10	#14880.00	-	-	-	-	-	-	-
11	#17360.00	-	-	-	-	-	-	-
12	19840.00	-	-	-	-	-	-	-
13	22320.00	-	-	-	-	-	-	-
14	#24800.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

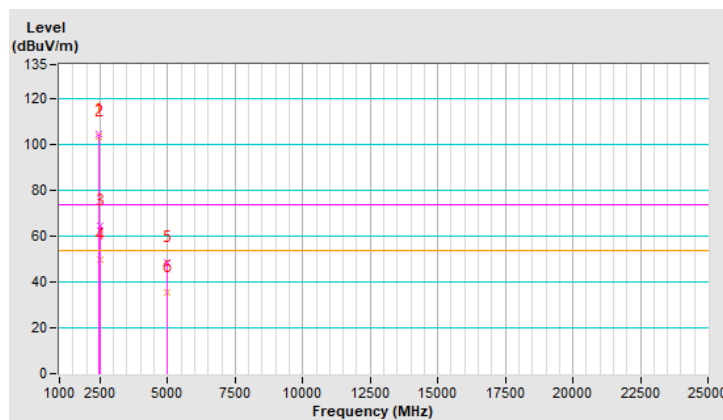


操作模式：	發射 BT_LE-4.0	調變技術：	GFSK
基本波頻率：	CH 39：2480 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	101.6 PK			1.88 V	350	67.2	34.4
2	*2480.00	100.2 AV			1.88 V	350	65.8	34.4
3	2483.50	60.6 PK	74.0	-13.4	1.88 V	350	26.2	34.4
4	2483.50	48.8 AV	54.0	-5.2	1.88 V	350	14.4	34.4
5	4960.00	49.4 PK	74.0	-24.6	1.69 V	349	43.1	6.3
6	4960.00	36.6 AV	54.0	-17.4	1.69 V	349	30.3	6.3
7	7440.00	-	-	-	-	-	-	-
8	#9920.00	-	-	-	-	-	-	-
9	12400.00	-	-	-	-	-	-	-
10	#14880.00	-	-	-	-	-	-	-
11	#17360.00	-	-	-	-	-	-	-
12	19840.00	-	-	-	-	-	-	-
13	22320.00	-	-	-	-	-	-	-
14	#24800.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

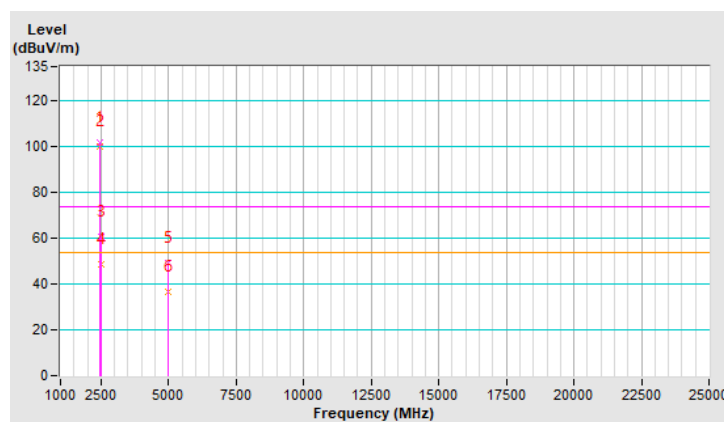


操作模式：	發射 BT_LE-5.0	調變技術：	GFSK
基本波頻率：	CH 0：2402 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.9 PK	74.0	-12.1	2.22 H	344	27.5	34.4
2	2390.00	48.5 AV	54.0	-5.5	2.22 H	344	14.1	34.4
3	*2402.00	105.7 PK			2.37 H	338	71.4	34.3
4	*2402.00	102.3 AV			2.37 H	338	68.0	34.3
5	4804.00	48.8 PK	74.0	-25.2	1.82 H	329	42.7	6.1
6	4804.00	35.4 AV	54.0	-18.6	1.82 H	329	29.3	6.1
7	#7206.00	-	-	-	-	-	-	-
8	#9608.00	-	-	-	-	-	-	-
9	12010.00	-	-	-	-	-	-	-
10	#14412.00	-	-	-	-	-	-	-
11	#16814.00	-	-	-	-	-	-	-
12	19216.00	-	-	-	-	-	-	-
13	#21618.00	-	-	-	-	-	-	-
14	#24020.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

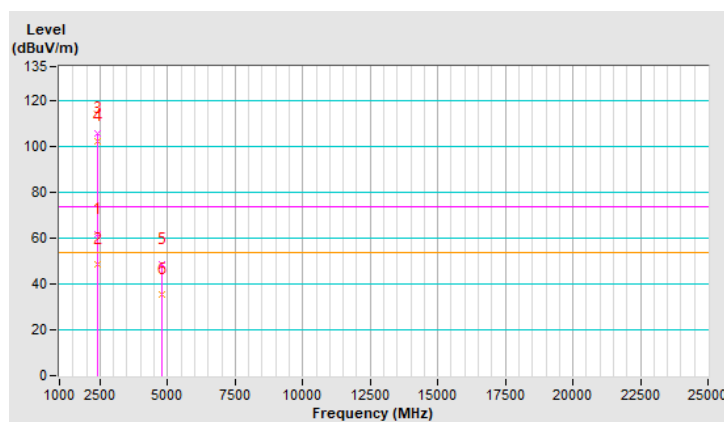


操作模式：	發射 BT_LE-5.0	調變技術：	GFSK
基本波頻率：	CH 0：2402 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	1.77 V	350	26.1	34.4
2	2390.00	48.4 AV	54.0	-5.6	1.77 V	350	14.0	34.4
3	*2402.00	102.4 PK			1.82 V	342	68.1	34.3
4	*2402.00	99.0 AV			1.82 V	342	64.7	34.3
5	4804.00	49.6 PK	74.0	-24.4	1.69 V	350	43.5	6.1
6	4804.00	36.6 AV	54.0	-17.4	1.69 V	350	30.5	6.1
7	#7206.00	-	-	-	-	-	-	-
8	#9608.00	-	-	-	-	-	-	-
9	12010.00	-	-	-	-	-	-	-
10	#14412.00	-	-	-	-	-	-	-
11	#16814.00	-	-	-	-	-	-	-
12	19216.00	-	-	-	-	-	-	-
13	#21618.00	-	-	-	-	-	-	-
14	#24020.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

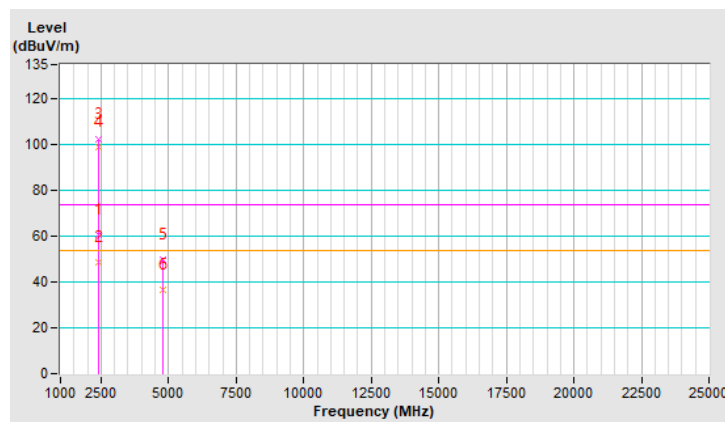


操作模式：	發射 BT_LE-5.0	調變技術：	GFSK
基本波頻率：	CH 19 : 2440 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	106.7 PK			2.51 H	331	72.4	34.3
2	*2440.00	103.1 AV			2.51 H	331	68.8	34.3
3	4880.00	49.0 PK	74.0	-25.0	1.75 H	339	42.9	6.1
4	4880.00	35.6 AV	54.0	-18.4	1.75 H	339	29.5	6.1
5	7320.00	-	-	-	-	-	-	-
6	#9760.00	-	-	-	-	-	-	-
7	12200.00	-	-	-	-	-	-	-
8	#14640.00	-	-	-	-	-	-	-
9	#17080.00	-	-	-	-	-	-	-
10	19520.00	-	-	-	-	-	-	-
11	#21960.00	-	-	-	-	-	-	-
12	#24400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

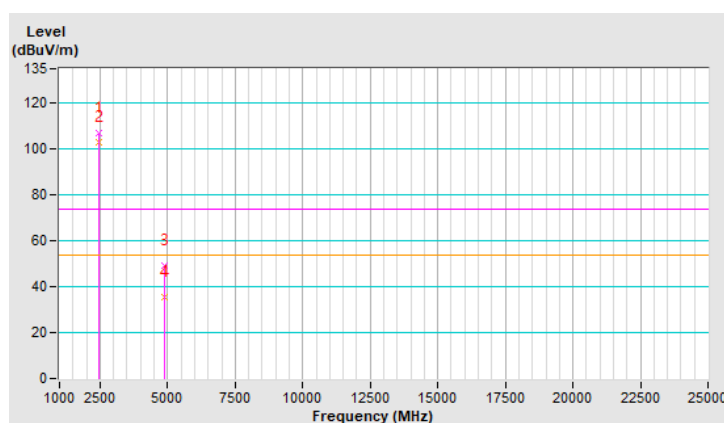


操作模式：	發射 BT_LE-5.0	調變技術：	GFSK
基本波頻率：	CH 19 : 2440 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	103.4 PK			1.72 V	337	69.1	34.3
2	*2440.00	99.8 AV			1.72 V	337	65.5	34.3
3	4880.00	50.1 PK	74.0	-23.9	1.75 V	350	44.0	6.1
4	4880.00	36.8 AV	54.0	-17.2	1.75 V	350	30.7	6.1
5	7320.00	-	-	-	-	-	-	-
6	#9760.00	-	-	-	-	-	-	-
7	12200.00	-	-	-	-	-	-	-
8	#14640.00	-	-	-	-	-	-	-
9	#17080.00	-	-	-	-	-	-	-
10	19520.00	-	-	-	-	-	-	-
11	#21960.00	-	-	-	-	-	-	-
12	#24400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

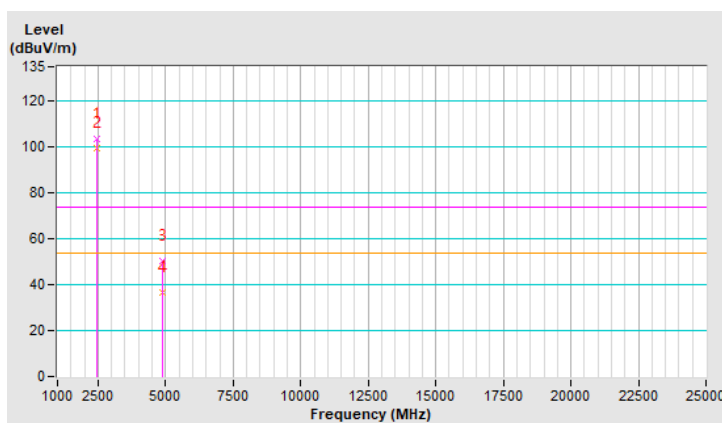


操作模式：	發射 BT_LE-5.0	調變技術：	GFSK
基本波頻率：	CH 39：2480 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	106.2 PK			2.02 H	331	71.8	34.4
2	*2480.00	102.8 AV			2.02 H	331	68.4	34.4
3	2483.50	65.9 PK	74.0	-8.1	2.22 H	333	31.5	34.4
4	2483.50	49.9 AV	54.0	-4.1	2.22 H	333	15.5	34.4
5	4960.00	49.1 PK	74.0	-24.9	1.79 H	350	42.8	6.3
6	4960.00	35.6 AV	54.0	-18.4	1.79 H	350	29.3	6.3
7	7440.00	-	-	-	-	-	-	-
8	#9920.00	-	-	-	-	-	-	-
9	12400.00	-	-	-	-	-	-	-
10	#14880.00	-	-	-	-	-	-	-
11	#17360.00	-	-	-	-	-	-	-
12	19840.00	-	-	-	-	-	-	-
13	22320.00	-	-	-	-	-	-	-
14	#24800.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

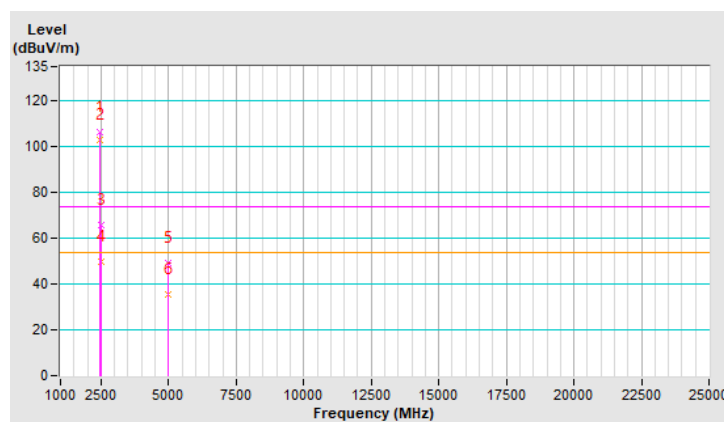


操作模式：	發射 BT_LE-5.0	調變技術：	GFSK
基本波頻率：	CH 39：2480 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	103.0 PK			1.77 V	345	68.6	34.4
2	*2480.00	99.5 AV			1.77 V	345	65.1	34.4
3	2483.50	62.1 PK	74.0	-11.9	1.79 V	350	27.7	34.4
4	2483.50	48.9 AV	54.0	-5.1	1.79 V	350	14.5	34.4
5	4960.00	50.0 PK	74.0	-24.0	1.88 V	341	43.7	6.3
6	4960.00	36.8 AV	54.0	-17.2	1.88 V	341	30.5	6.3
7	7440.00	-	-	-	-	-	-	-
8	#9920.00	-	-	-	-	-	-	-
9	12400.00	-	-	-	-	-	-	-
10	#14880.00	-	-	-	-	-	-	-
11	#17360.00	-	-	-	-	-	-	-
12	19840.00	-	-	-	-	-	-	-
13	22320.00	-	-	-	-	-	-	-
14	#24800.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

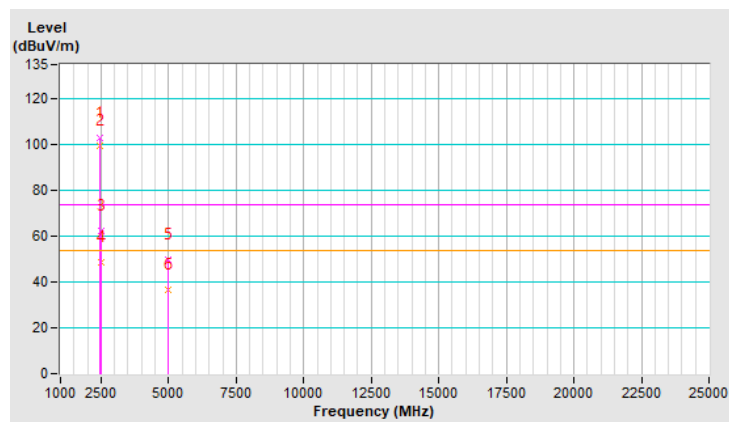


4.6.2 接收諧波

操作模式：	接收		
基本波頻率：	CH 19 : 2440 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz (RMS)
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3660.00	43.4 PK	74.0	-30.6	2.21 H	334	41.5	1.9
2	3660.00	29.9 AV	54.0	-24.1	2.21 H	334	28.0	1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

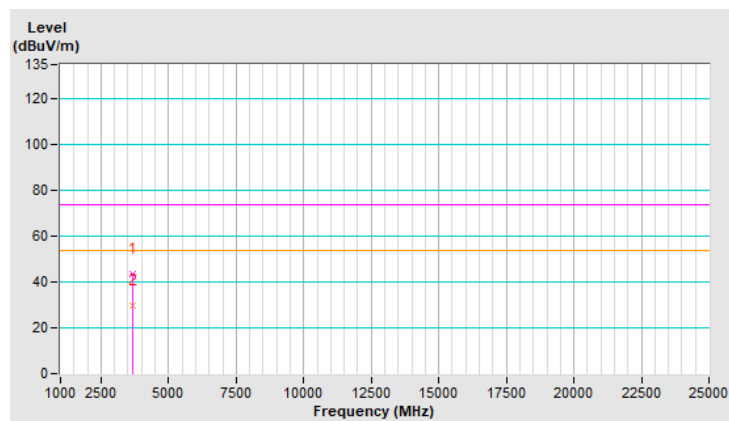


操作模式：	接收		
基本波頻率：	CH 19：2440 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz (RMS)
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3660.00	43.8 PK	74.0	-30.2	1.75 V	222	41.9	1.9
2	3660.00	30.3 AV	54.0	-23.7	1.75 V	222	28.4	1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

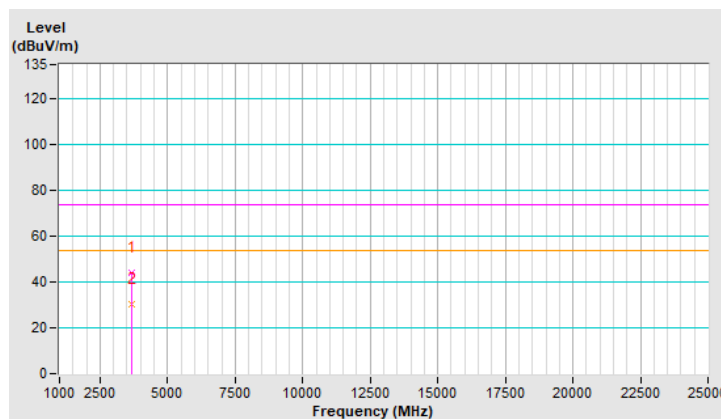


4.6.3 其它不必要之訊號

操作模式：	發射接收 BT_LE-4.0	調變技術：	GFSK
基本波頻率：	CH 19 : 2440 MHz	檢測器與頻寬：	(QP) RB=120kHz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.25	35.3 QP	40.0	-4.7	1.99 H	222	44.6	-9.3
2	79.20	34.2 QP	40.0	-5.8	1.50 H	290	47.3	-13.1
3	139.65	35.4 QP	43.5	-8.1	1.99 H	297	44.4	-9.0
4	191.67	34.0 QP	43.5	-9.5	1.00 H	284	45.0	-11.0
5	240.87	31.8 QP	46.0	-14.2	1.00 H	239	40.9	-9.1
6	374.42	37.4 QP	46.0	-8.6	1.00 H	124	42.5	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

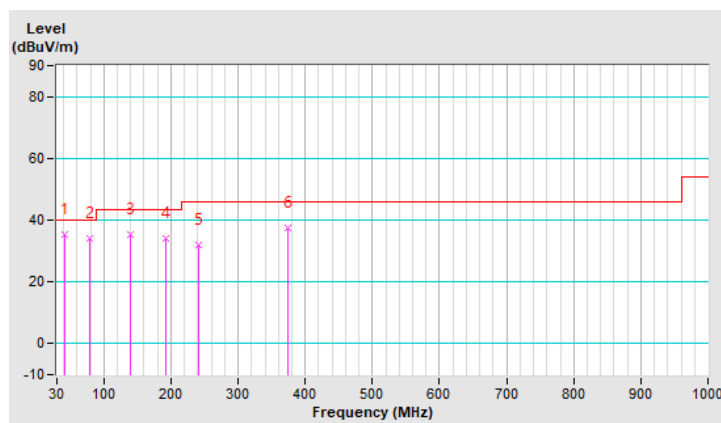


操作模式：	發射接收 BT_LE-4.0	調變技術：	GFSK
基本波頻率：	CH 19：2440 MHz	檢測器與頻寬：	(QP) RB=120kHz
量測場地溫度：	23°C	量測場地濕度：	66%RH
測試日期：	109 年 12 月 25 日	測試者：	彭民達

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.91	36.9 QP	40.0	-3.1	1.00 V	195	47.1	-10.2
2	58.46	36.0 QP	40.0	-4.0	1.48 V	1	45.4	-9.4
3	98.88	33.7 QP	43.5	-9.8	1.00 V	85	47.2	-13.5
4	138.25	32.7 QP	43.5	-10.8	1.00 V	295	41.8	-9.1
5	260.55	27.5 QP	46.0	-18.5	1.99 V	325	35.5	-8.0
6	499.54	36.7 QP	46.0	-9.3	1.00 V	15	39.0	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

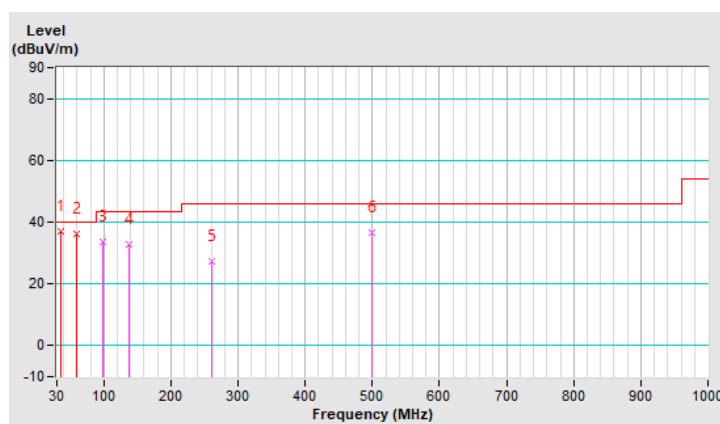


4.7 配置照片

請參閱附件測試設置照片(BV CPS 報告編號：RTBDYS-WTW-P20110911A_TSup)。



4.8 帶外發射之量測 (傳導)

BT LE 4.0


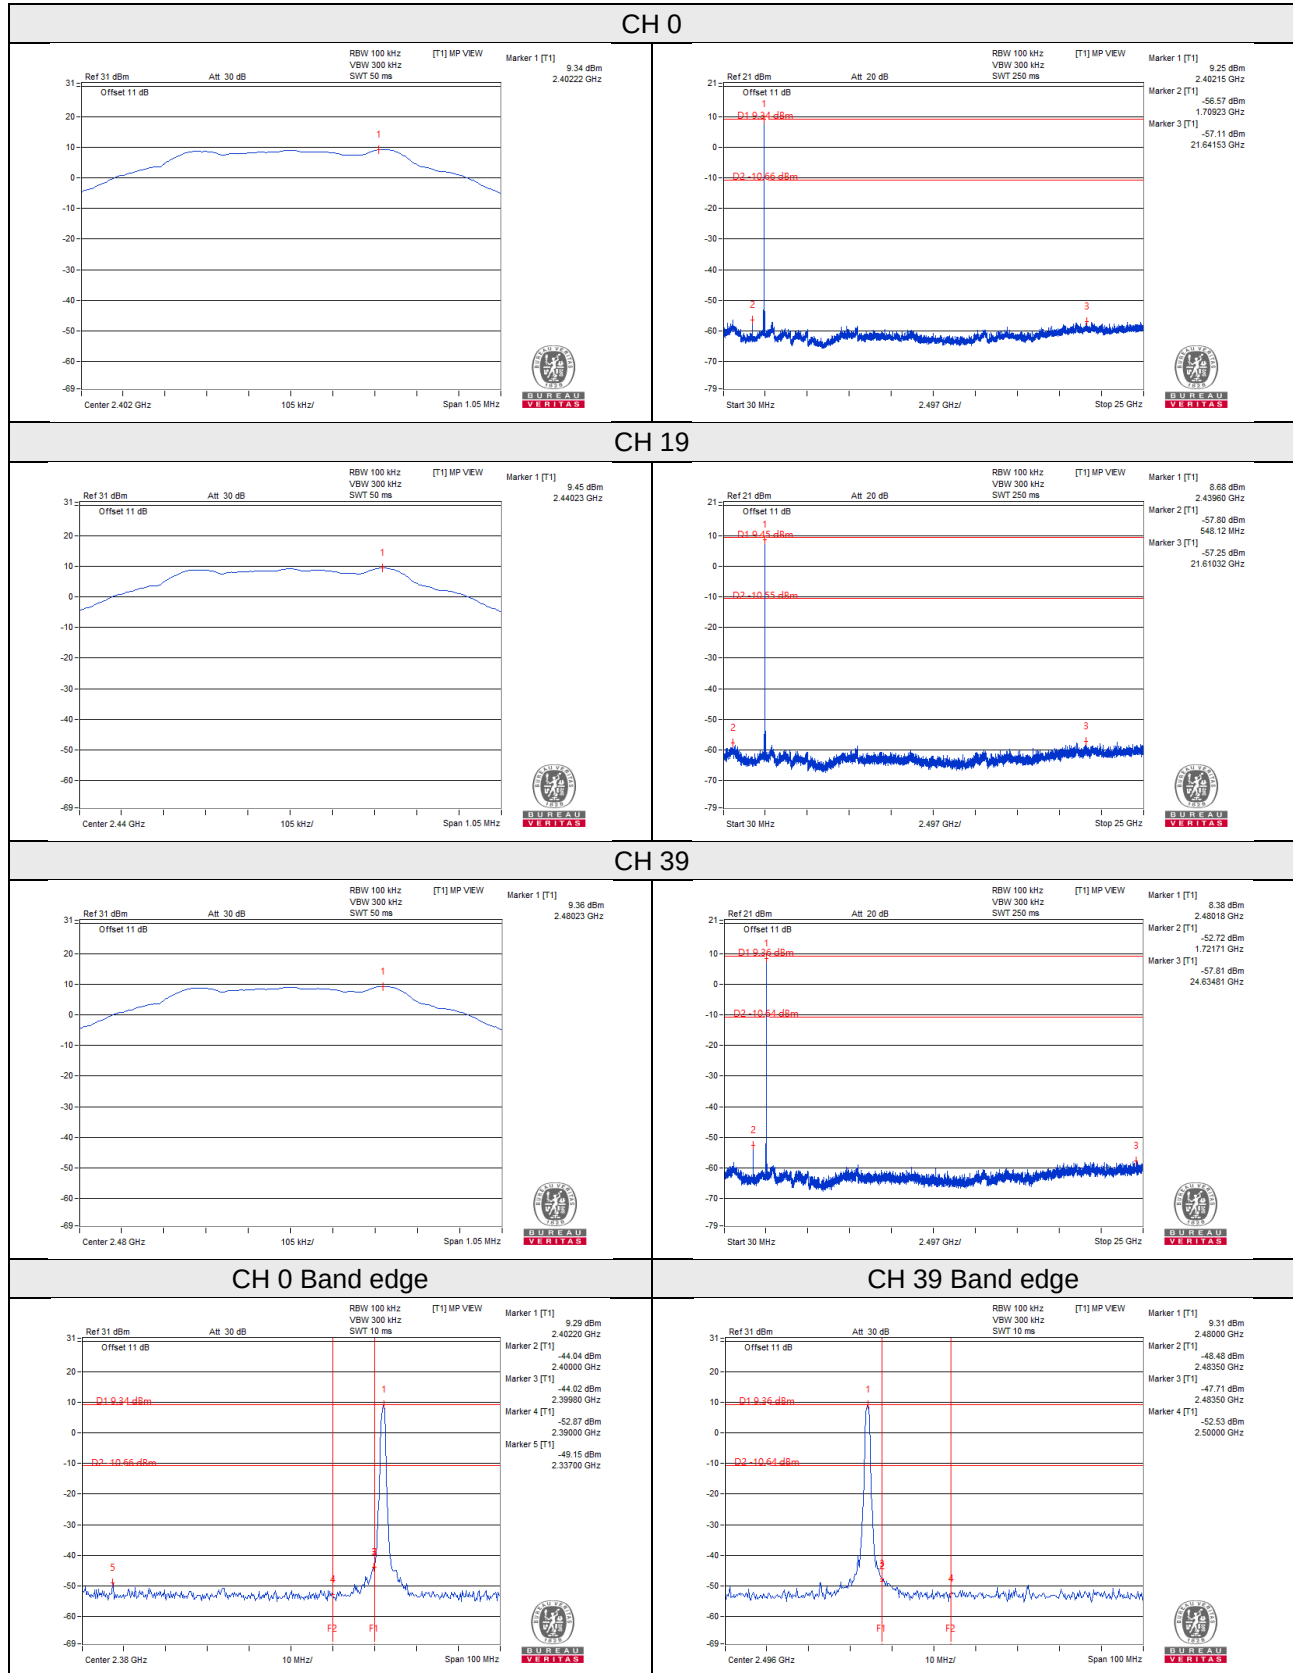


BT LE 5.0



CH 0

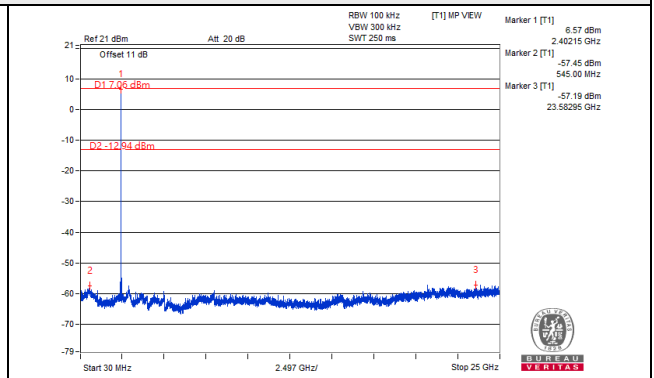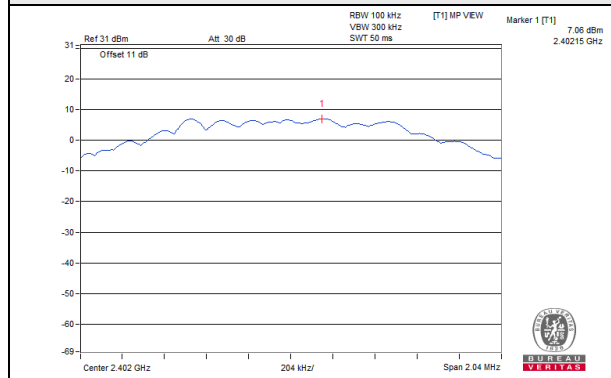


CH 19

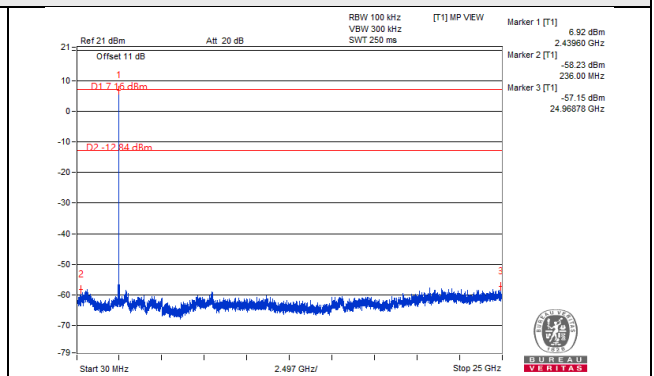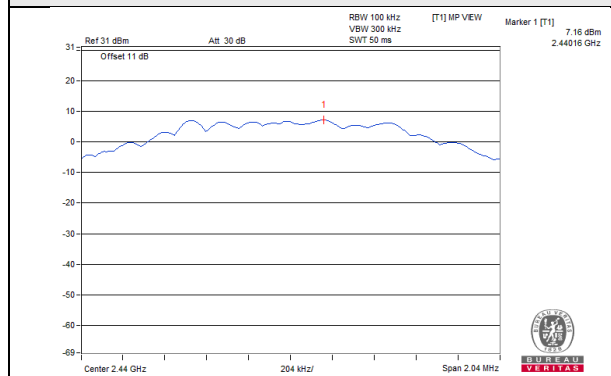


CH 39

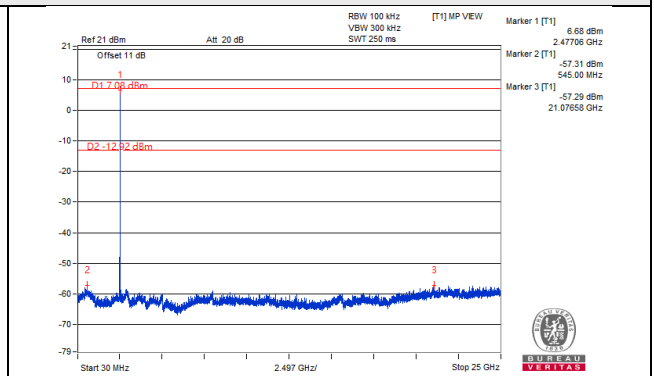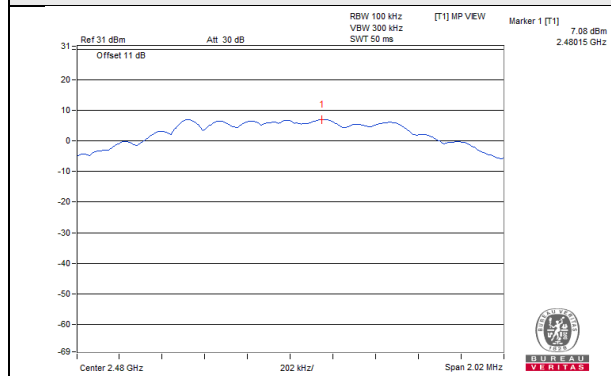

CH 0 Band edge

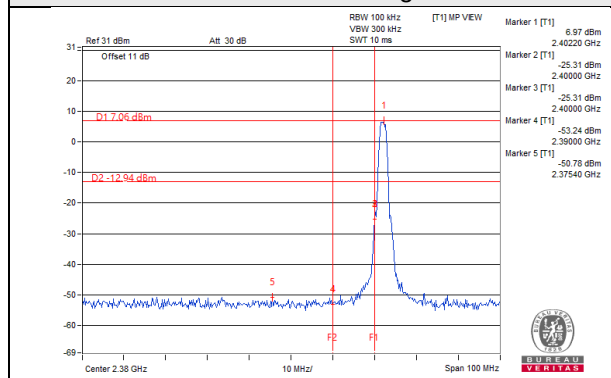

CH 39 Band edge

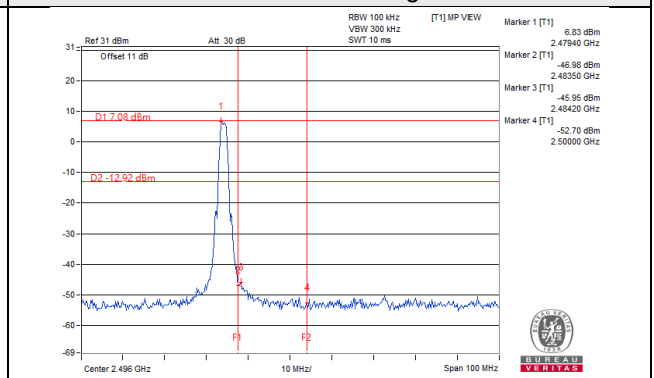

4.9 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

5 電源線傳導干擾之量測

5.1 適用標準

請見本報告3.1節第1項的規定。

5.2 量測方法


將待測物置於0.8米高的非金屬桌面，使其操作在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由0.15MHz至30MHz之間之電源線傳導放射強度。

5.3 量測儀器

儀器名稱 (廠牌/製造商)	型號	序號	校正日期	下次校正日期
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Dec. 31, 2019	Dec. 30, 2020
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Sep. 04, 2020	Sep. 03, 2021
V-LISN SCHWARZBECK (EUT)	ENV216	101826	Feb. 20, 2020	Feb. 19, 2021
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 28, 2020	Aug. 27, 2021
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).
3. The VCCI Site Registration No. is C-12040.
4. The measurement uncertainty is 2.79 dB, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.4 測試配置

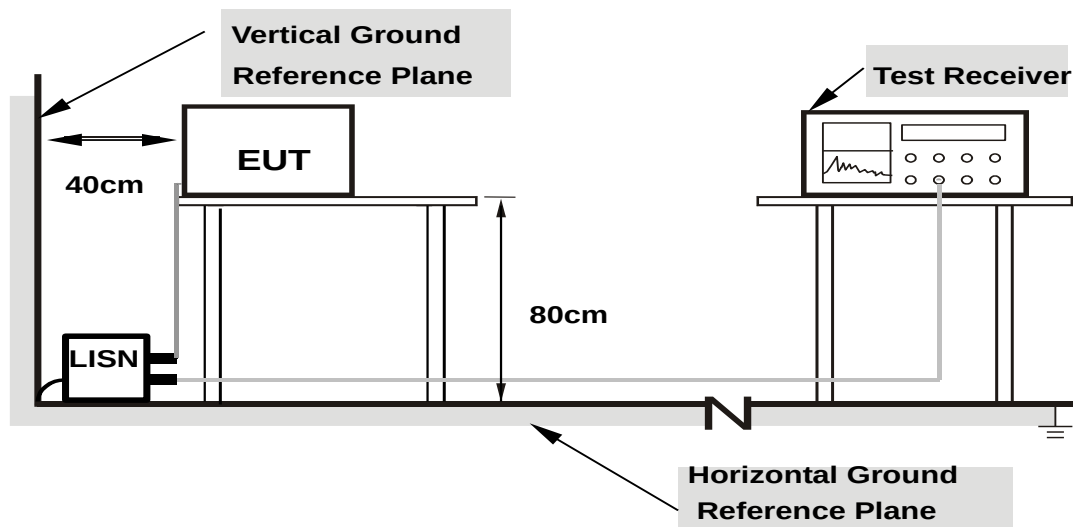

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

5.5 干擾值之計算

餘裕度Margin(dB)= 結果值Emission level (dBuV)-限制值Limit value (dBuV)

電源傳導干擾電壓之計算公式如下

結果值Emission level (dBuV)=校正因子Correction Factor (dB)+儀器讀值Reading value (dBuV)

其中校正因子Correction Factor (dB)為：

饋線損失+電源阻抗模擬網路損失


5.6 量測結果

量測頻率範圍	150kHz ~ 30MHz	檢測器與頻寬	準峰值 (QP) / 平均值 (AV), 9kHz
量測電壓值	110Vac, 60Hz	量測場地溫濕度	23°C, 67%RH
測試者	彭民達	測試日期	2020/12/25

量測電源端點：火線 (L1)										
No	頻率 (MHz)	修正因子 (dB)	量測讀值 (dBuV)		干擾值 (dBuV)		限制值 (dBuV)		餘裕 (dB)	
			準峰值	平均值	準峰值	平均值	準峰值	平均值	準峰值	平均值
1	0.15400	9.65	39.10	26.28	48.75	35.93	65.78	55.78	-17.03	-19.85
2	0.16200	9.65	36.50	22.60	46.15	32.25	65.36	55.36	-19.21	-23.11
3	0.21000	9.66	29.03	16.54	38.69	26.20	63.21	53.21	-24.52	-27.01
4	0.47800	9.66	36.14	31.45	45.80	41.11	56.37	46.37	-10.57	-5.26
5	1.87000	9.70	25.95	21.71	35.65	31.41	56.00	46.00	-20.35	-14.59
6	12.75000	9.82	17.94	13.17	27.76	22.99	60.00	50.00	-32.24	-27.01

附註：

1. 其它頻率的干擾值對限制值而言非常低，所以未記錄。
2. 餘裕值(dB) = 干擾值(dBuV) - 限制值(dBuV)
3. 干擾值(dBuV) = 修正因子(dB) + 量測讀值(dBuV)

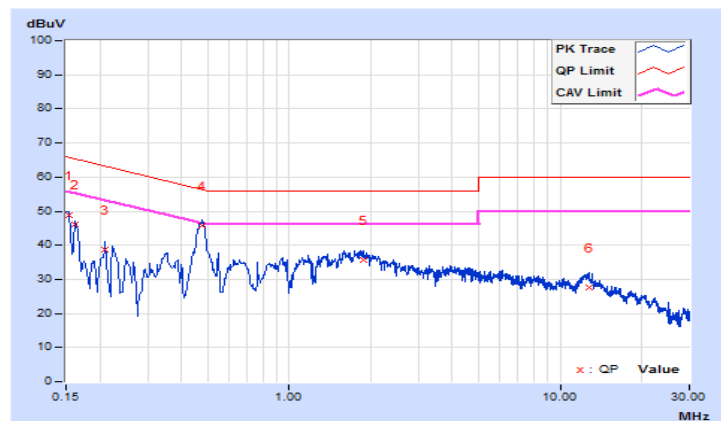


量測頻率範圍	150kHz ~ 30MHz	檢測器與頻寬	準峰值 (QP) / 平均值 (AV), 9kHz
量測電壓值	110Vac, 60Hz	量測場地溫濕度	23°C, 67%RH
測試者	彭民達	測試日期	2020/12/25

量測電源端點：中性線 (N)										
No	頻率 (MHz)	修正因子 (dB)	量測讀值 (dBuV)		干擾值 (dBuV)		限制值 (dBuV)		餘裕 (dB)	
			準峰值	平均值	準峰值	平均值	準峰值	平均值	準峰值	平均值
1	0.16977	9.68	34.22	23.16	43.90	32.84	64.97	54.97	-21.07	-22.13
2	0.19000	9.68	32.45	18.41	42.13	28.09	64.04	54.04	-21.91	-25.95
3	0.48200	9.68	35.71	30.83	45.39	40.51	56.30	46.30	-10.91	-5.79
4	0.94594	9.69	23.98	19.53	33.67	29.22	56.00	46.00	-22.33	-16.78
5	1.36200	9.70	23.11	18.91	32.81	28.61	56.00	46.00	-23.19	-17.39
6	4.95400	9.78	18.67	12.08	28.45	21.86	56.00	46.00	-27.55	-24.14

附註：

1. 其它頻率的干擾值對限制值而言非常低，所以未記錄。
2. 餘裕值(dB) = 干擾值(dBuV) - 限制值(dBuV)
3. 干擾值(dBuV) = 修正因子(dB) + 量測讀值(dBuV)

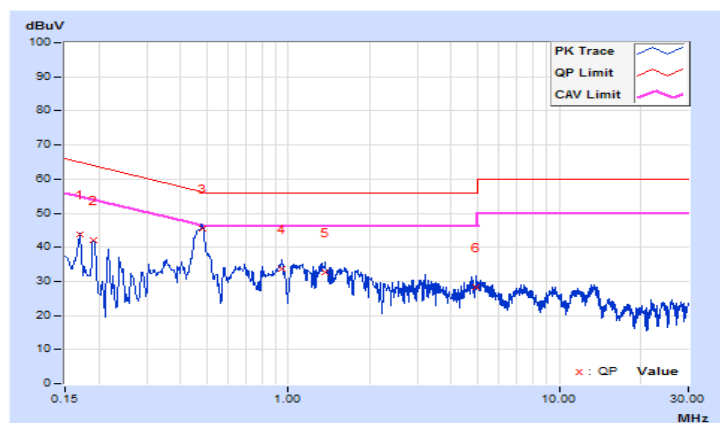

5.7 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

5.8 配置照片

請參閱附件測試設置照片(BV CPS 報告編號：RTBDYS-WTW-P20110911A_TSup)。

6 發射(6 dB)頻寬之要求

6.1 適用標準

請見本報告3.1節第5項的規定。

6.2 量測方法


- 將待測物輸出經由衰減器接到頻譜分析儀上。
- 設定待測物處於連續發射狀態。
- 計算由最大輸出功率峰值減6dB的最大頻率範圍。

6.3 量測儀器

儀器名稱 (廠牌/製造商)	型號	序號	校正日期	下次校正日期
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 16, 2020	Sep. 15, 2021

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The measurement uncertainty is 207Hz, which is calculated as per the document ETSI TR 100 028. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

6.4 測試配置



6.5 量測結果

操作模式	發射	測試日期	109 年 12 月 30 日
量測場地溫度	25°C	量測場地濕度	60%RH
測試者	吳佳衡		


BT LE 4.0

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.70	0.50	Pass
19	2440	0.70	0.50	Pass
39	2480	0.70	0.50	Pass

BT LE 5.0

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.36	0.50	Pass
19	2440	1.36	0.50	Pass
39	2480	1.35	0.50	Pass

**此測試圖僅放測試結果最差的頻道。

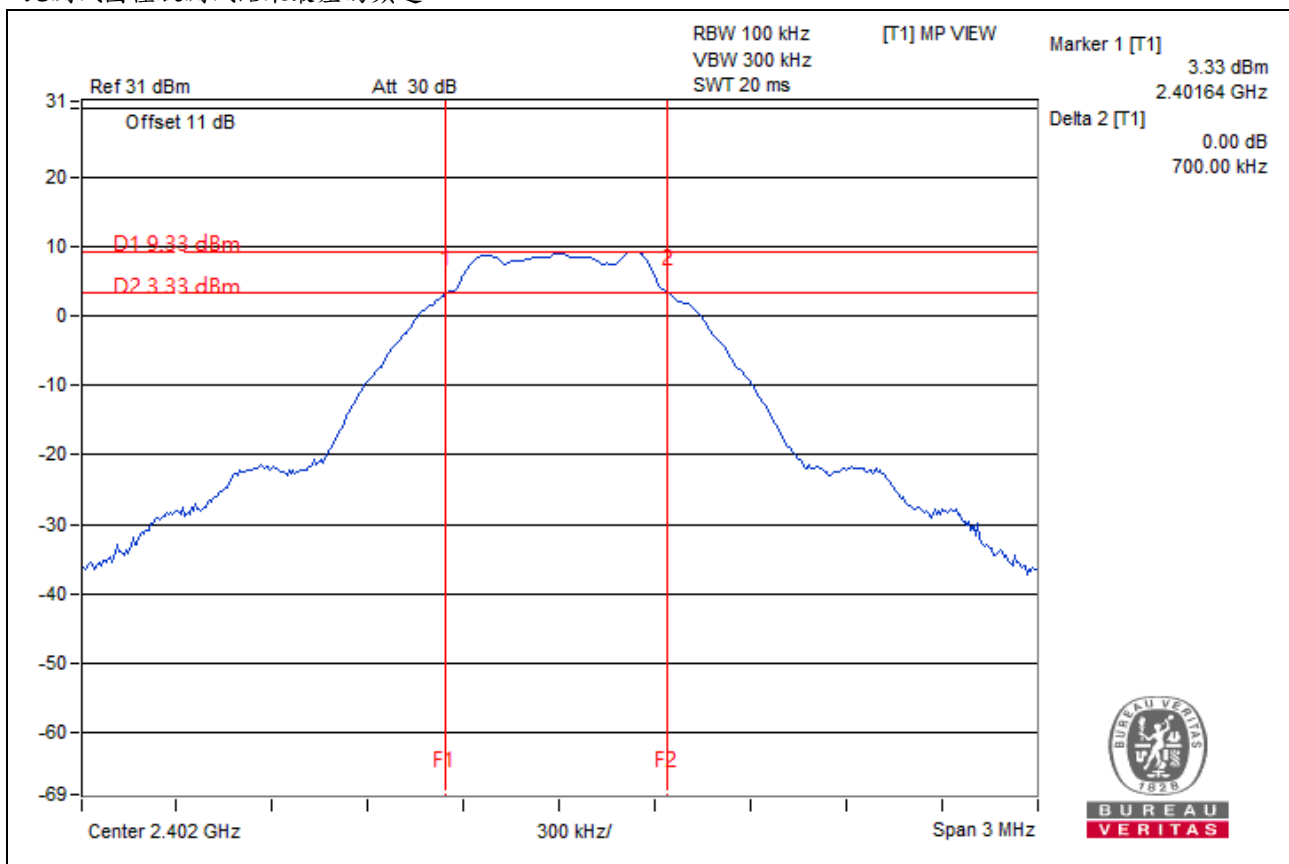

6.6 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

7 峰值傳導輸出功率之量測

7.1 適用標準

請見本報告3.1節第6項的規定。

7.2 量測方法


- 將待測物輸出經由衰減器接到功率計上。
- 設定待測物處於連續發射狀態。
- 計算其輸出功率峰值。

7.3 量測儀器

儀器名稱 (廠牌/製造商)	型號	序號	校正日期	下次校正日期
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190004/MY55210005	Jul. 13, 2020	Jul. 12, 2021

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The measurement uncertainty is 1.393dB, which is calculated as per the document ETSI TR 100 028. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

7.4 測試配置



7.5 量測結果

操作模式	發射	測試日期	109 年 12 月 30 日
量測場地溫度	25°C	量測場地濕度	60%RH
測試者	吳佳衡		

For Peak Power

BT LE 4.0

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	10.940	10.39	30.00	Pass
19	2440	11.246	10.51	30.00	Pass
39	2480	10.990	10.41	30.00	Pass

BT LE 5.0

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	10.889	10.37	30.00	Pass
19	2440	11.194	10.49	30.00	Pass
39	2480	10.940	10.39	30.00	Pass

For Average Power

BT LE 4.0

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	10.568	10.24
19	2440	10.864	10.36
39	2480	10.617	10.26

BT LE 5.0

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	10.544	10.23
19	2440	10.839	10.35
39	2480	10.617	10.26

7.6 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

8 功率頻譜密度之量測

8.1 適用標準

請見本報告3.1節第7項的規定。

8.2 量測方法


- 將待測物之天線埠經由適當之衰減直接連至測試儀器。
- 設定解析頻寬為3kHz，視訊頻寬為10kHz，掃描時間為auto。
- 掃描頻寬設於足夠觀察發射機所產生的主頻信號，並找到最大的峰值準位。
- 校正後的值，其峰值位準必須不大於8dBm / per 3kHz。

8.3 量測儀器

儀器名稱 (廠牌/製造商)	型號	序號	校正日期	下次校正日期
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 16, 2020	Sep. 15, 2021

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The measurement uncertainty is 207Hz, which is calculated as per the document ETSI TR 100 028. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

8.4 測試配置



8.5 量測結果

操作模式	發射	測試日期	109 年 12 月 30 日
量測場地溫度	25°C	量測場地濕度	60%RH
測試者	吳佳衡		


BT LE 4.0

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	2402	-5.73	8.00	Pass
19	2440	-5.60	8.00	Pass
39	2480	-5.68	8.00	Pass

BT LE 5.0

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	2402	-7.57	8.00	Pass
19	2440	-7.47	8.00	Pass
39	2480	-7.57	8.00	Pass

**此測試圖僅放測試結果最差的頻道。

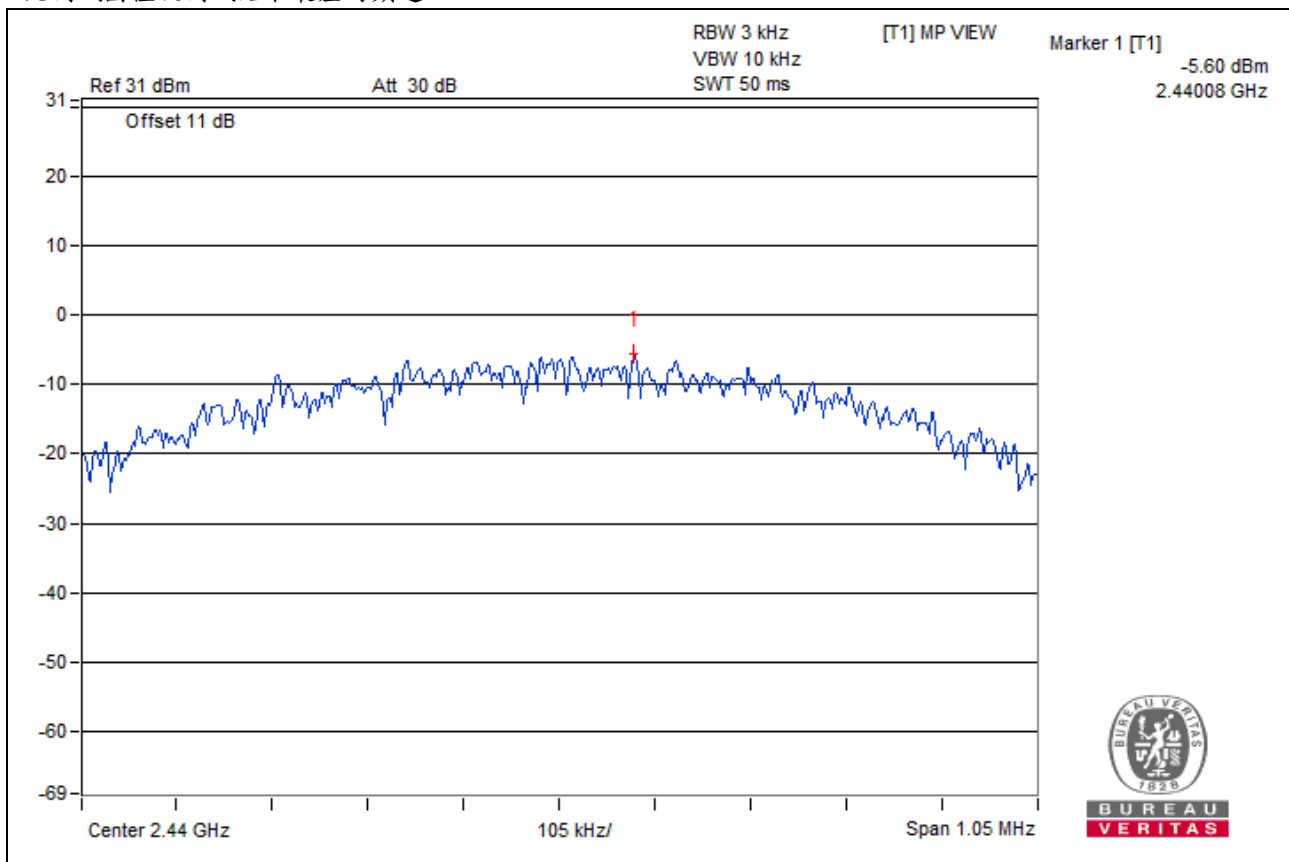

8.6 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

9 檢測實驗室基本資料

立德國際商品試驗有限公司桃園分公司提供產業界最佳的檢測以及諮詢服務。
本公司為ISO/IEC 17025認可實驗室。

如您有任何問題或建議，請與下列實驗室聯絡：

林口 EMC / RF 實驗室：

Tel: 886-2-26052180

Fax: 886-2-26051924

新竹 EMC / RF 及通訊實驗室：

Tel: 886-3-6668565

Fax: 886-3-6668323

華亞 EMC / RF / Safety 實驗室：

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

您也可以在我们的網站內找到各實驗室的地圖。

---END---