


Site: AC1	Time: 2020/02/18 - 15:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz	

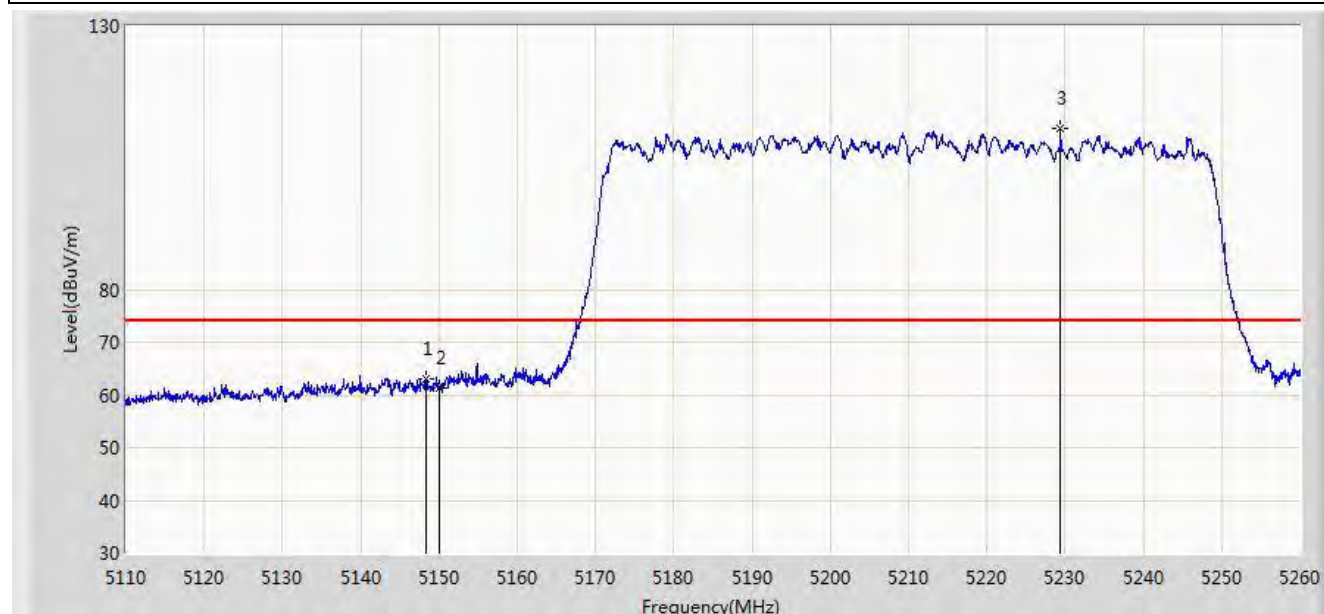


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.325	63.099	59.454	-10.901	74.000	3.645	PK
2			5150.000	61.349	57.703	-12.651	74.000	3.646	PK
3		*	5229.400	110.567	106.870	N/A	N/A	3.698	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/02/18 - 15:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz	

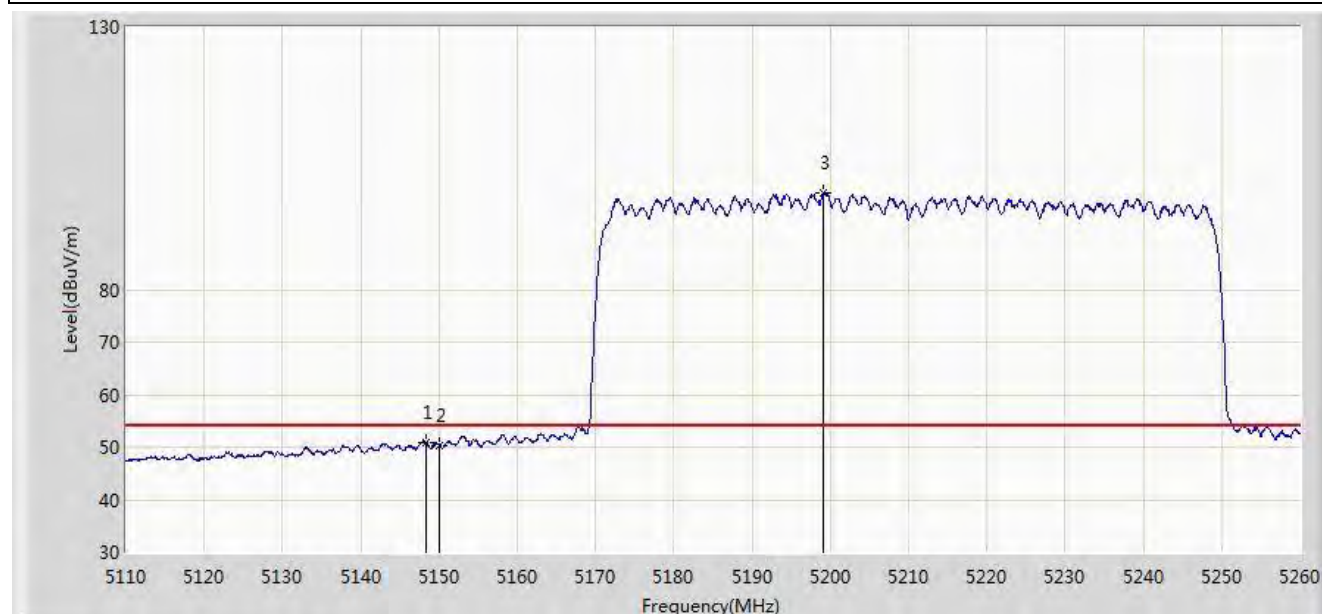


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.400	50.996	47.351	-3.004	54.000	3.645	AV
2			5150.000	50.410	46.764	-3.590	54.000	3.646	AV
3		*	5199.175	98.523	94.845	N/A	N/A	3.678	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/02/18 - 15:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz	

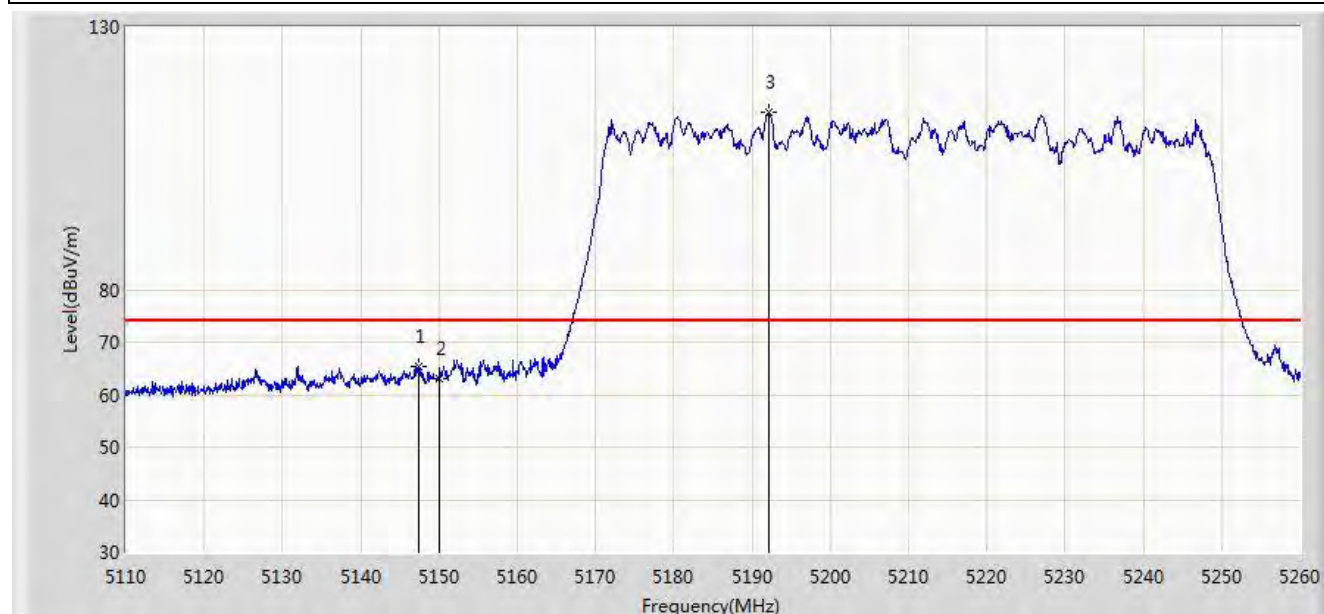


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.350	65.468	61.823	-8.532	74.000	3.644	PK
2			5150.000	63.095	59.449	-10.905	74.000	3.646	PK
3		*	5192.050	113.788	110.115	N/A	N/A	3.673	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/02/18 - 15:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz	

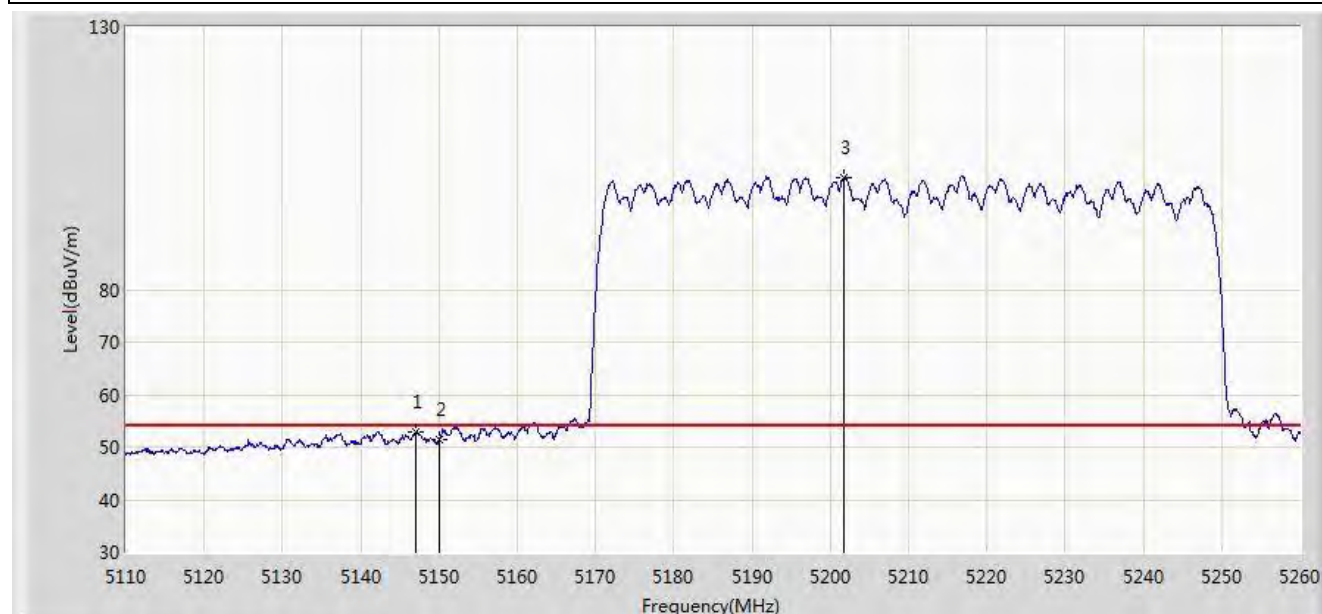


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.050	52.828	49.184	-1.172	54.000	3.644	AV
2			5150.000	51.515	47.869	-2.485	54.000	3.646	AV
3		*	5201.725	101.357	97.678	N/A	N/A	3.680	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/05 - 00:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

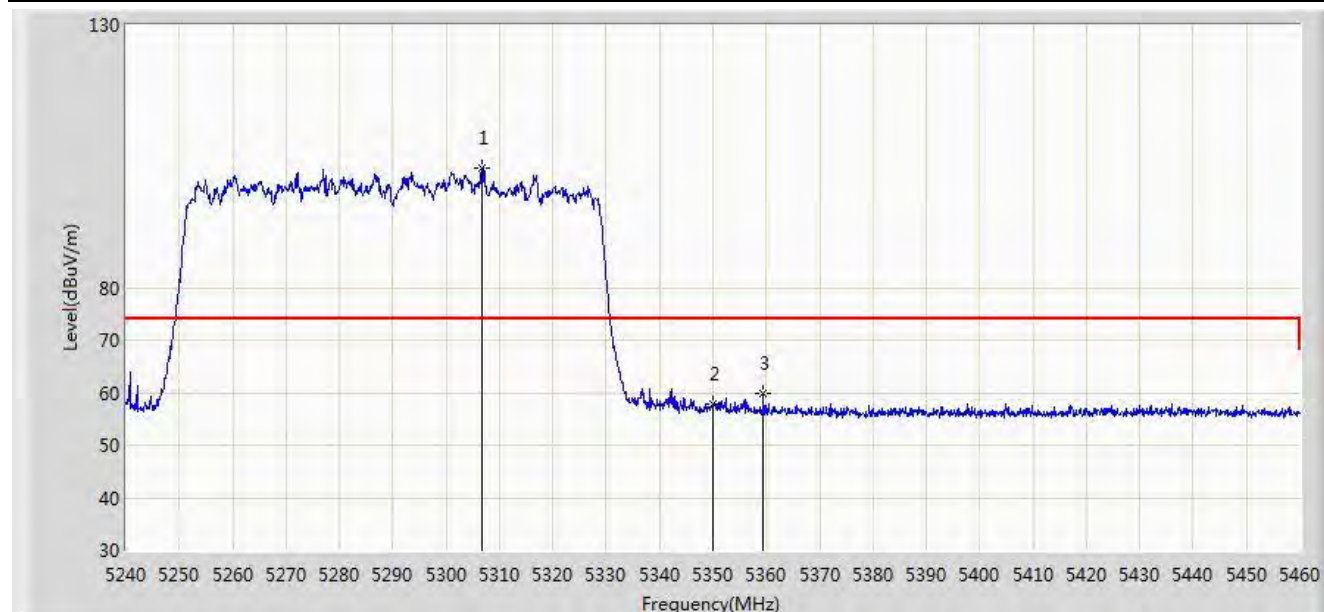


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.660	102.637	98.891	N/A	N/A	3.746	PK
2			5350.000	57.876	54.102	-16.124	74.000	3.774	PK
3			5359.460	59.789	56.009	-14.211	74.000	3.779	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/05 - 00:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

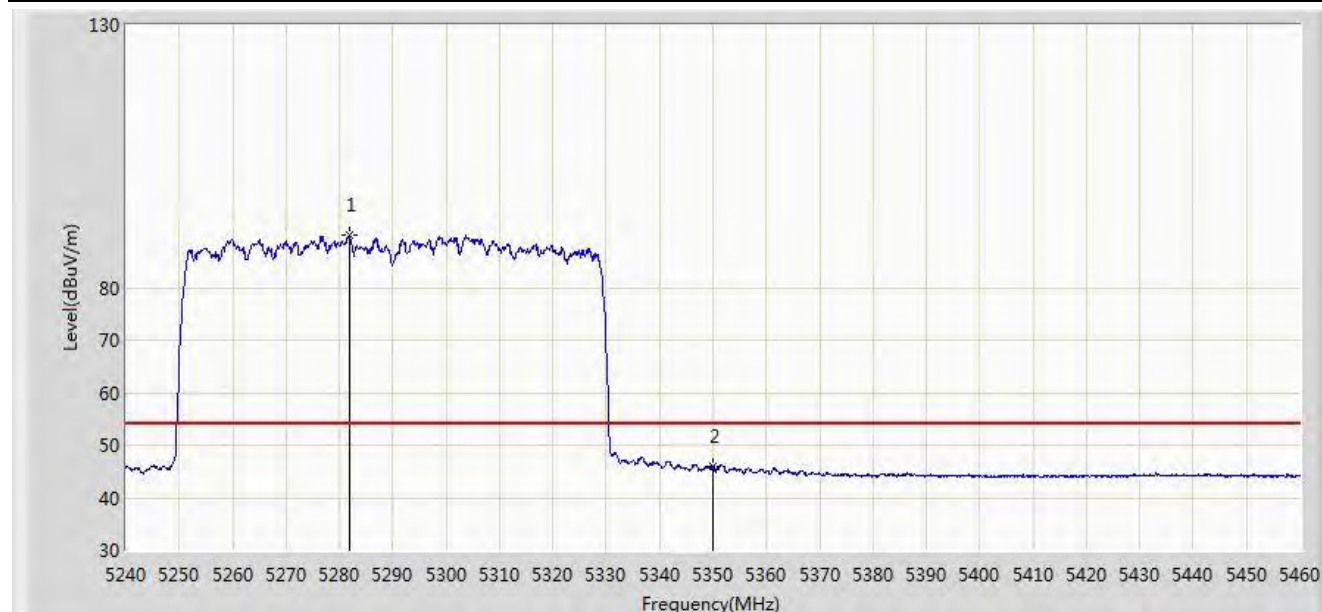


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5282.020	89.917	86.187	N/A	N/A	3.731	AV
2			5350.000	45.989	42.215	-8.011	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/05 - 00:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

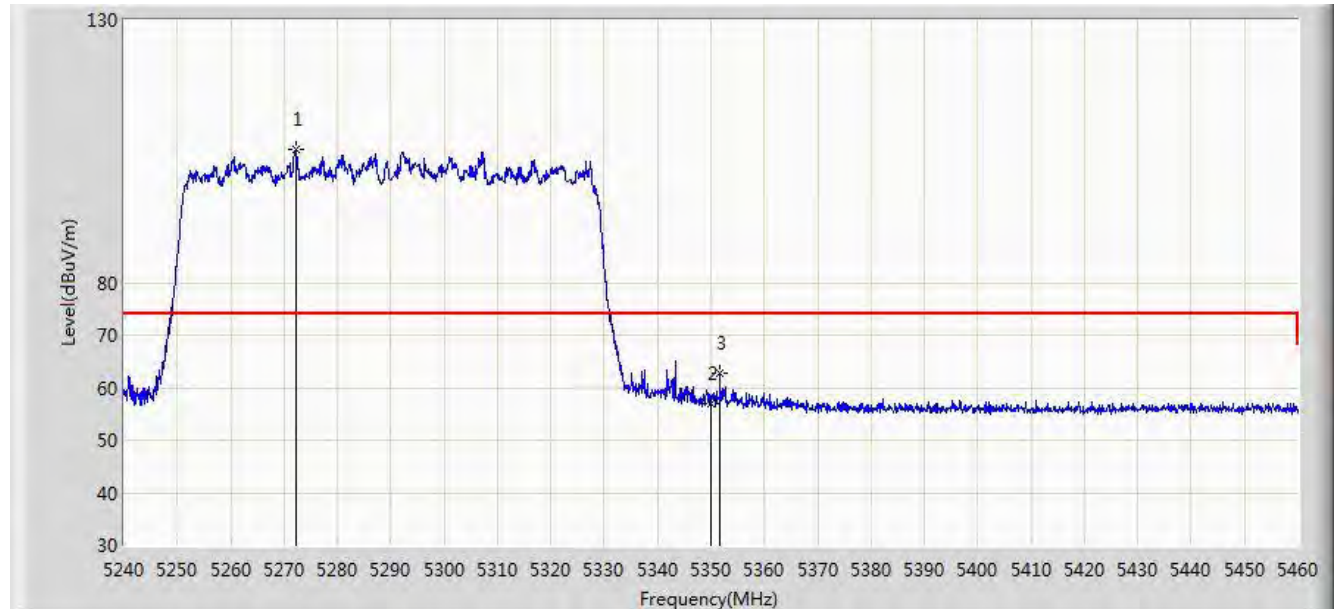


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5272.120	105.398	101.674	N/A	N/A	3.723	PK
2			5350.000	56.948	53.174	-17.052	74.000	3.774	PK
3			5351.650	62.890	59.115	-11.110	74.000	3.775	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/05 - 00:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

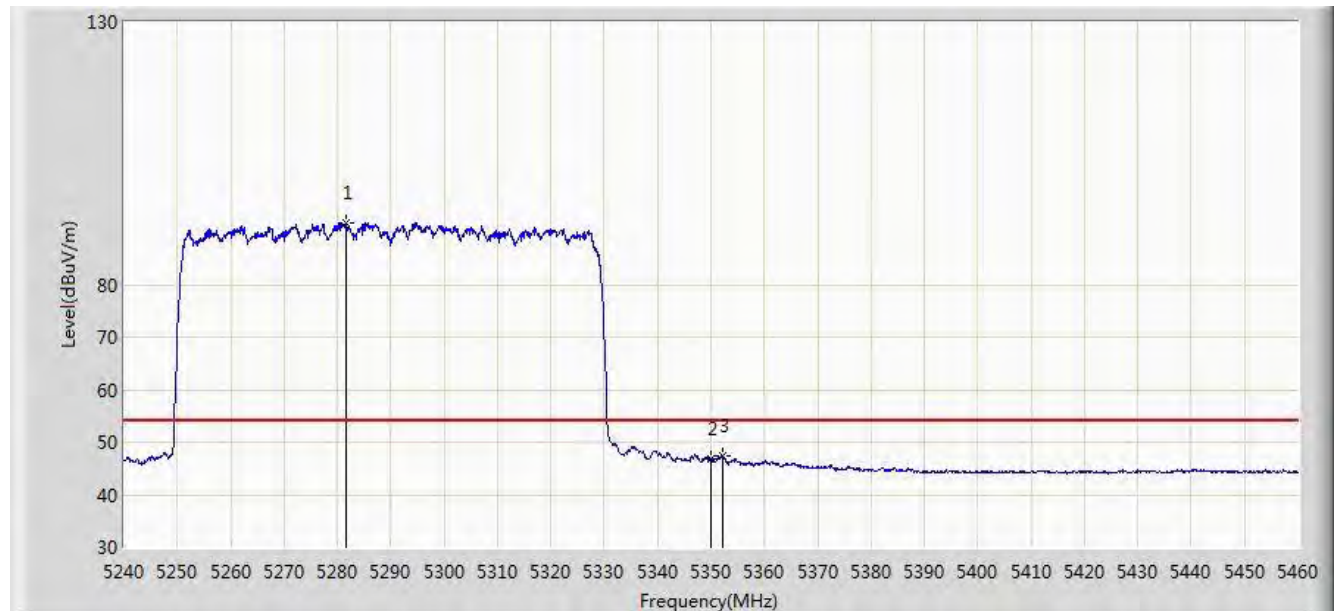


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5281.690	91.704	87.974	N/A	N/A	3.730	AV
2			5350.000	46.818	43.044	-7.182	54.000	3.774	AV
3			5352.090	47.278	43.503	-6.722	54.000	3.775	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/05 - 00:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

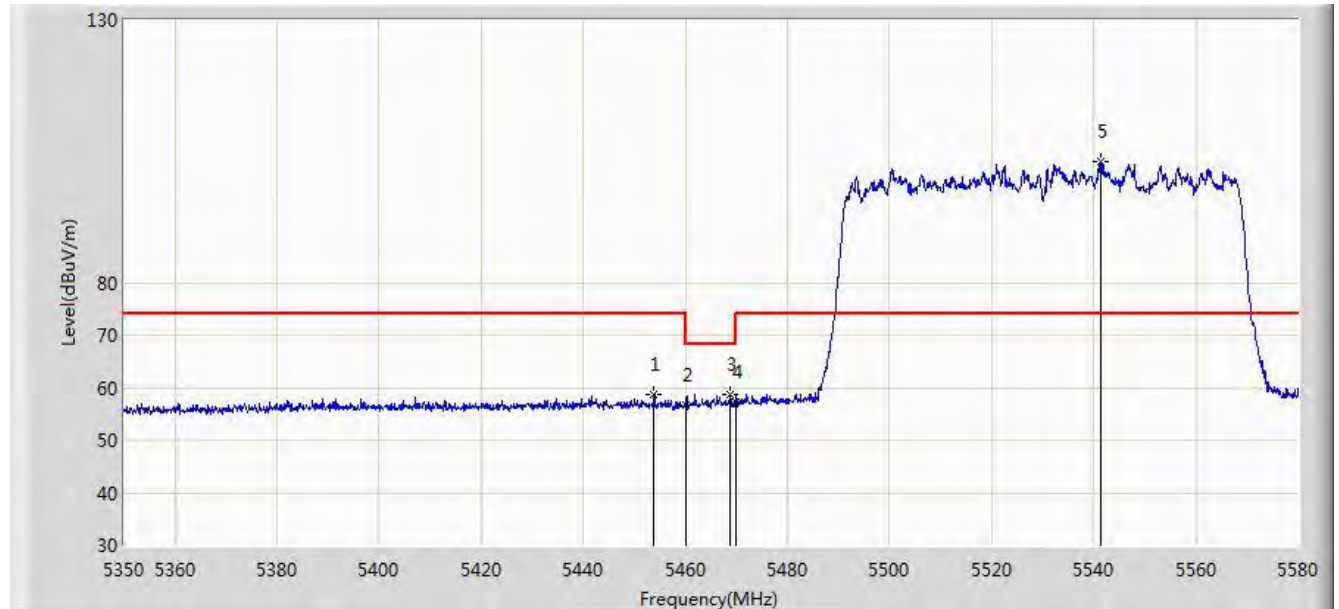


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.845	58.754	54.914	-15.246	74.000	3.840	PK
2			5460.000	56.775	52.931	-17.225	74.000	3.844	PK
3			5468.795	58.766	54.916	-9.434	68.200	3.850	PK
4			5470.000	57.118	53.267	-11.082	68.200	3.850	PK
5		*	5541.475	103.131	99.102	N/A	N/A	4.030	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/05 - 00:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

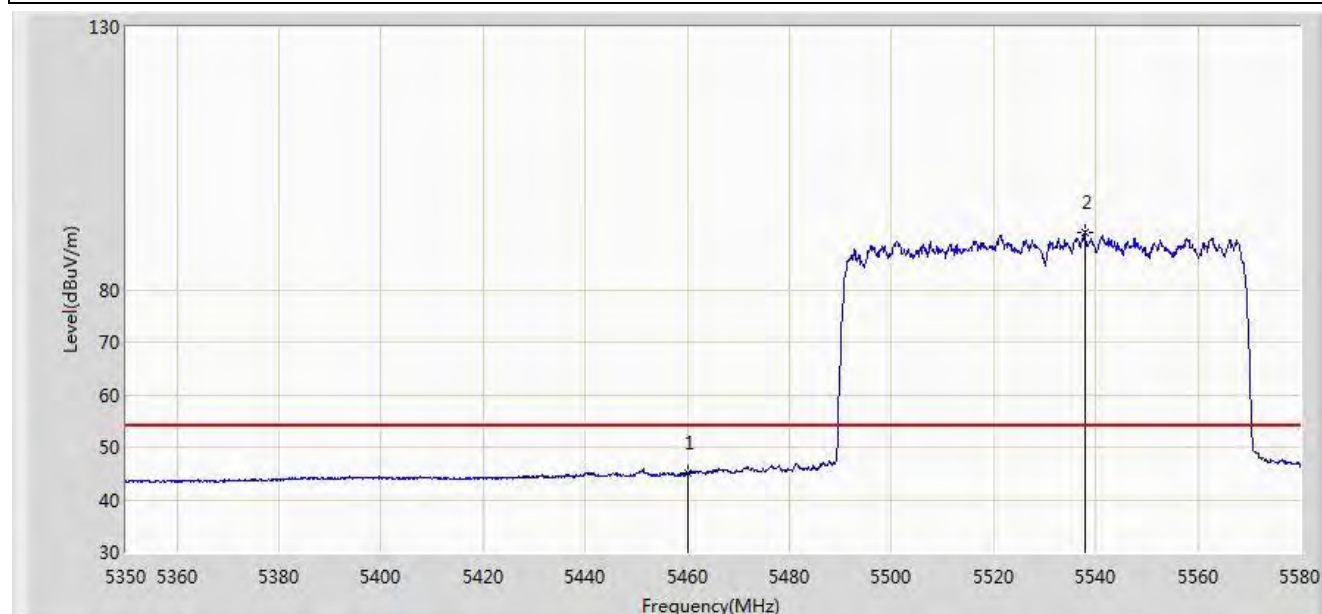


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.035	41.191	-8.965	54.000	3.844	AV
2		*	5537.795	91.014	86.999	N/A	N/A	4.016	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/05 - 00:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

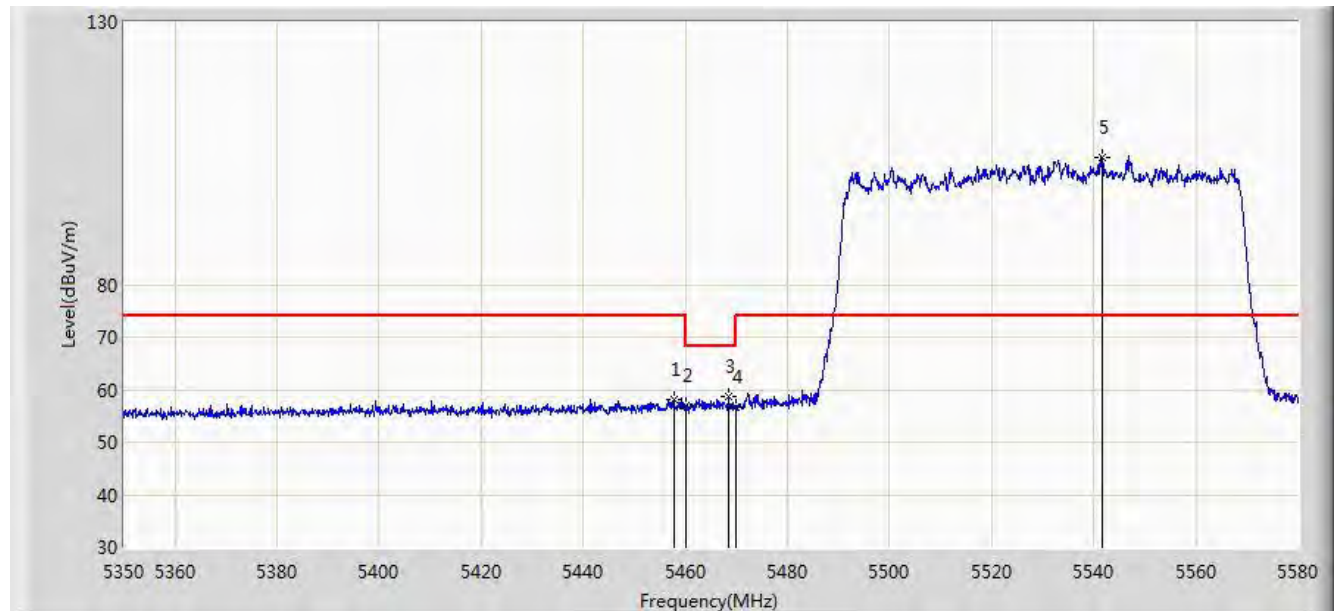


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.755	58.120	54.278	-15.880	74.000	3.842	PK
2			5460.000	57.041	53.197	-16.959	74.000	3.844	PK
3			5468.335	58.822	54.973	-9.378	68.200	3.849	PK
4			5470.000	56.713	52.862	-11.487	68.200	3.850	PK
5		*	5541.590	104.116	100.086	N/A	N/A	4.030	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/05 - 00:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

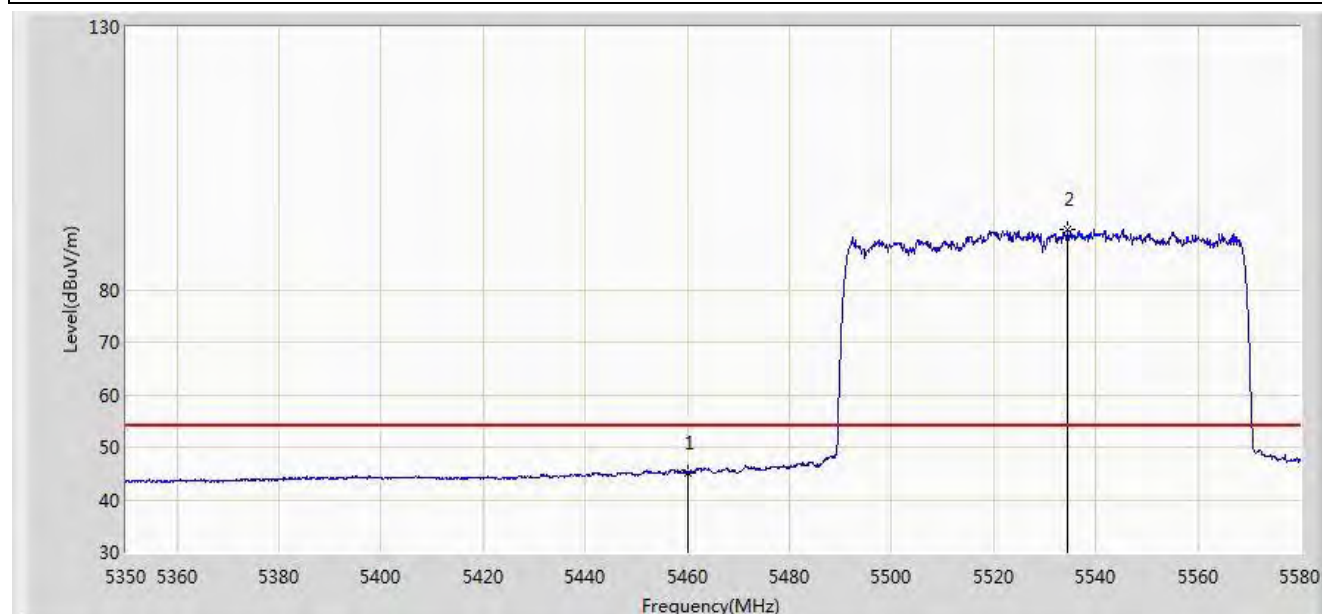


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.101	41.257	-8.899	54.000	3.844	AV
2		*	5534.575	91.530	87.527	N/A	N/A	4.003	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/05 - 00:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz	

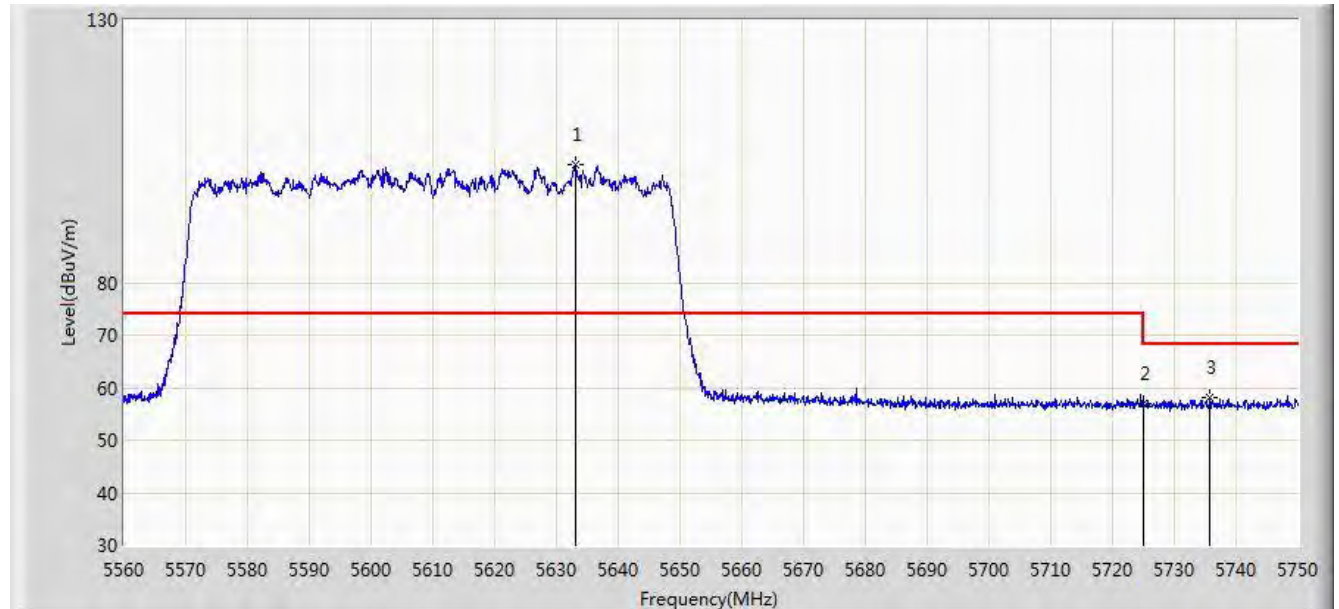


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5633.055	102.444	98.063	N/A	N/A	4.382	PK
2			5725.000	56.838	52.104	-11.362	68.200	4.734	PK
3			5735.750	58.121	53.346	-10.079	68.200	4.775	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/05 - 00:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz	

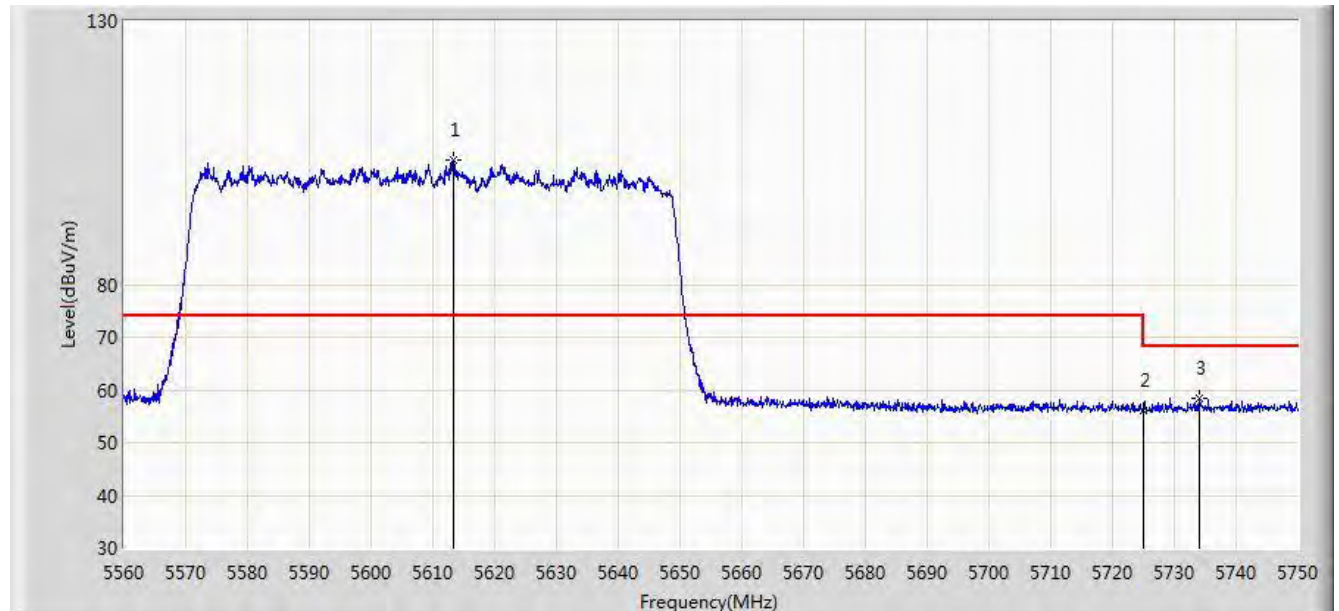


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5613.390	103.589	99.284	N/A	N/A	4.305	PK
2			5725.000	56.097	51.363	-12.103	68.200	4.734	PK
3			5734.135	58.407	53.638	-9.793	68.200	4.768	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/02/18 - 15:54
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz	

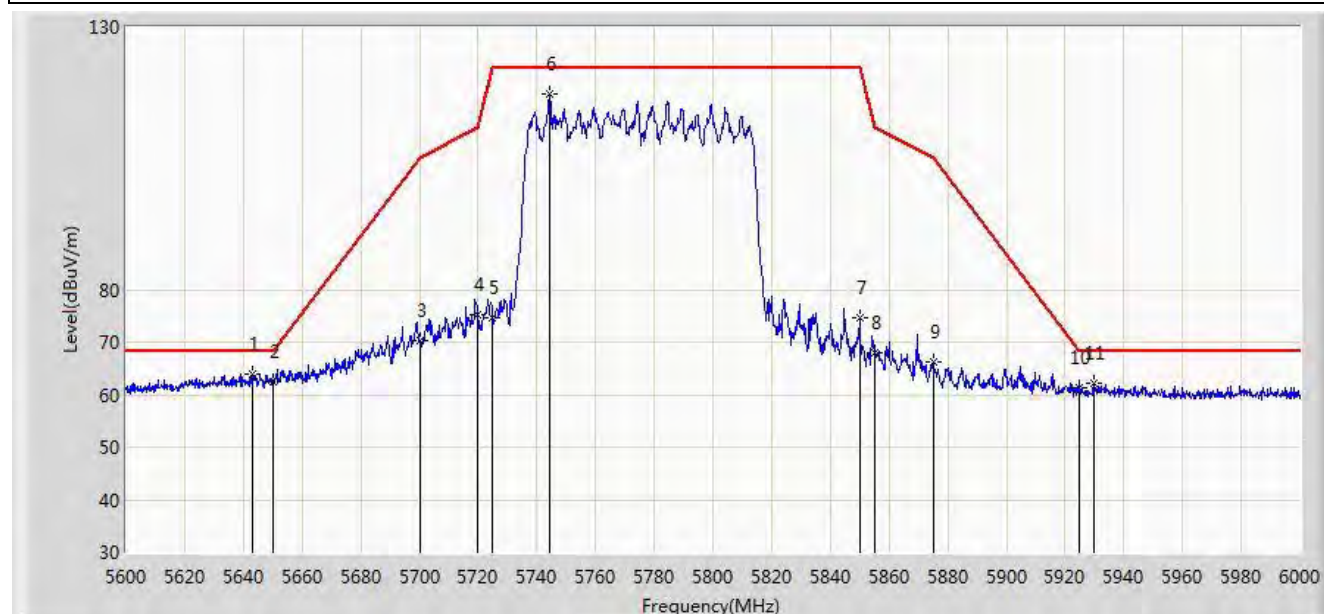


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5643.000	63.849	59.430	-4.351	68.200	4.419	PK
2			5650.000	62.456	58.010	-5.744	68.200	4.446	PK
3			5700.000	70.195	65.557	-35.005	105.200	4.638	PK
4			5720.000	75.236	70.521	-35.564	110.800	4.715	PK
5			5725.000	74.715	69.981	-47.485	122.200	4.734	PK
6			5744.200	117.322	112.515	N/A	N/A	4.807	PK
7			5850.000	74.613	69.399	-47.587	122.200	5.214	PK
8			5855.000	67.952	62.719	-42.848	110.800	5.233	PK
9			5875.000	66.249	60.939	-38.951	105.200	5.310	PK
10			5925.000	61.396	55.894	-6.804	68.200	5.502	PK
11			5929.600	62.180	56.660	-6.020	68.200	5.520	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/02/18 - 15:53
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz	

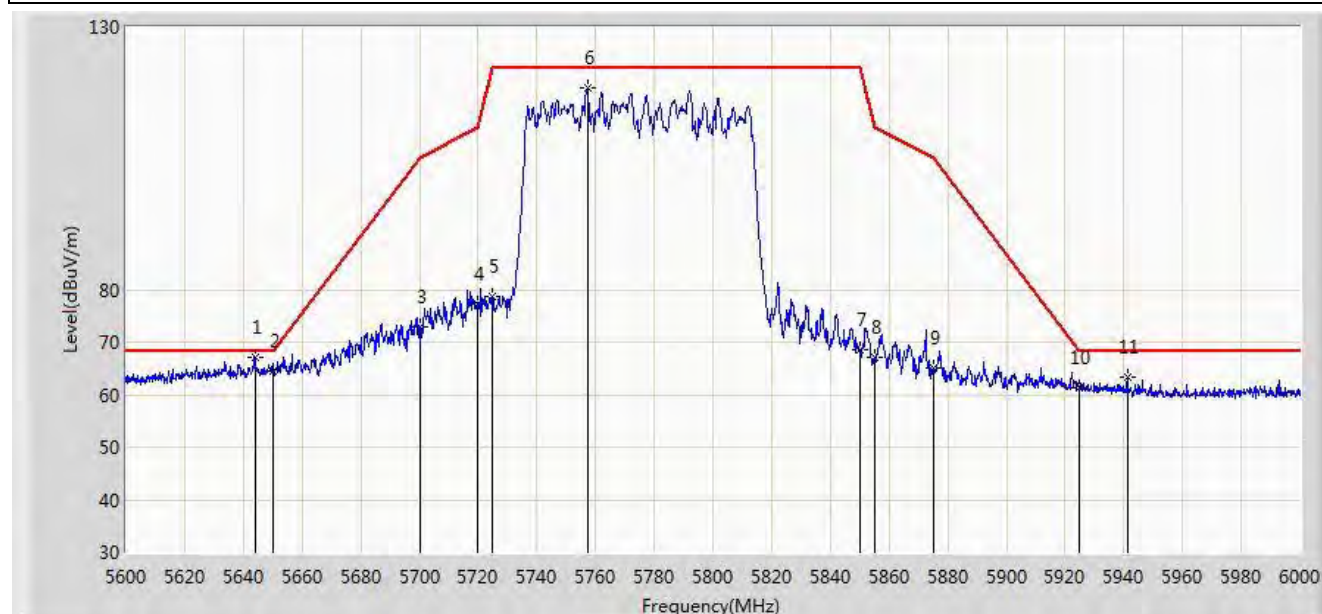


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5644.000	67.172	62.749	-1.028	68.200	4.423	PK
2			5650.000	64.559	60.113	-3.641	68.200	4.446	PK
3			5700.000	72.885	68.247	-32.315	105.200	4.638	PK
4			5720.000	77.344	72.629	-33.456	110.800	4.715	PK
5			5725.000	78.565	73.831	-43.635	122.200	4.734	PK
6			5757.200	118.285	113.428	N/A	N/A	4.858	PK
7			5850.000	68.500	63.286	-53.700	122.200	5.214	PK
8			5855.000	67.147	61.914	-43.653	110.800	5.233	PK
9			5875.000	65.067	59.757	-40.133	105.200	5.310	PK
10			5925.000	61.285	55.783	-6.915	68.200	5.502	PK
11			5941.200	63.259	57.694	-4.941	68.200	5.564	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/09 - 16:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE160 at Channel 5250MHz	

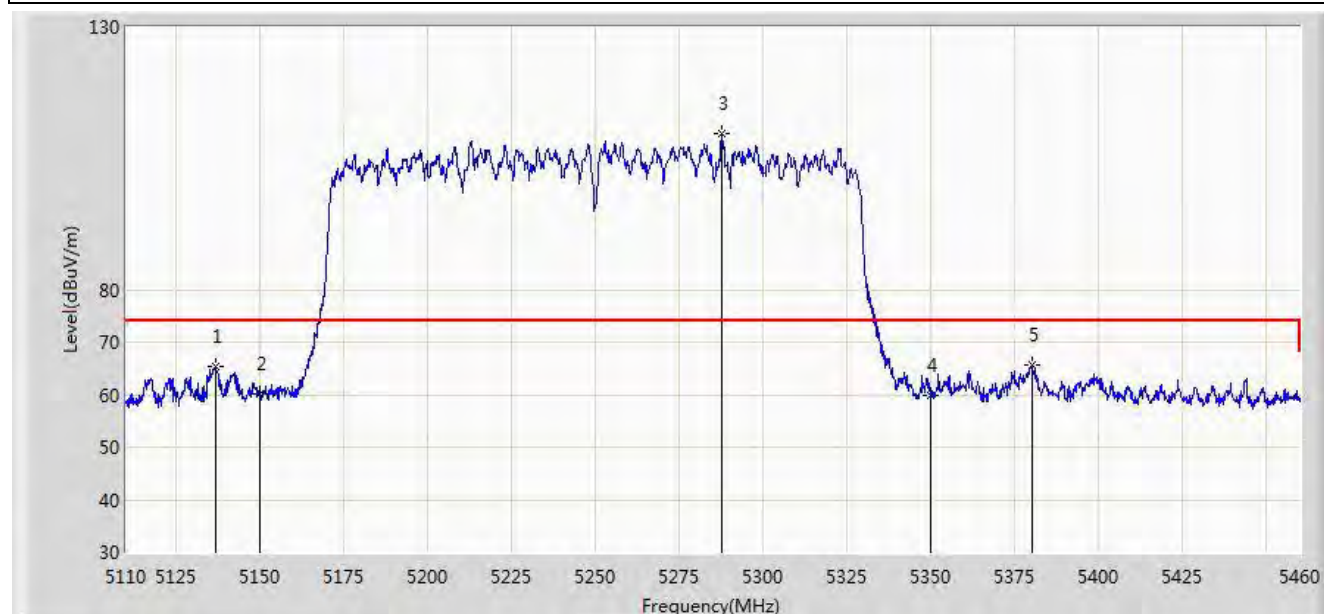


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.775	65.333	61.695	-8.667	74.000	3.638	PK
2			5150.000	60.230	56.584	-13.770	74.000	3.646	PK
3		*	5287.625	109.678	105.944	N/A	N/A	3.733	PK
4			5350.000	59.820	56.046	-14.180	74.000	3.774	PK
5			5380.375	65.618	61.824	-8.382	74.000	3.794	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/09 - 16:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE160 at Channel 5250MHz	

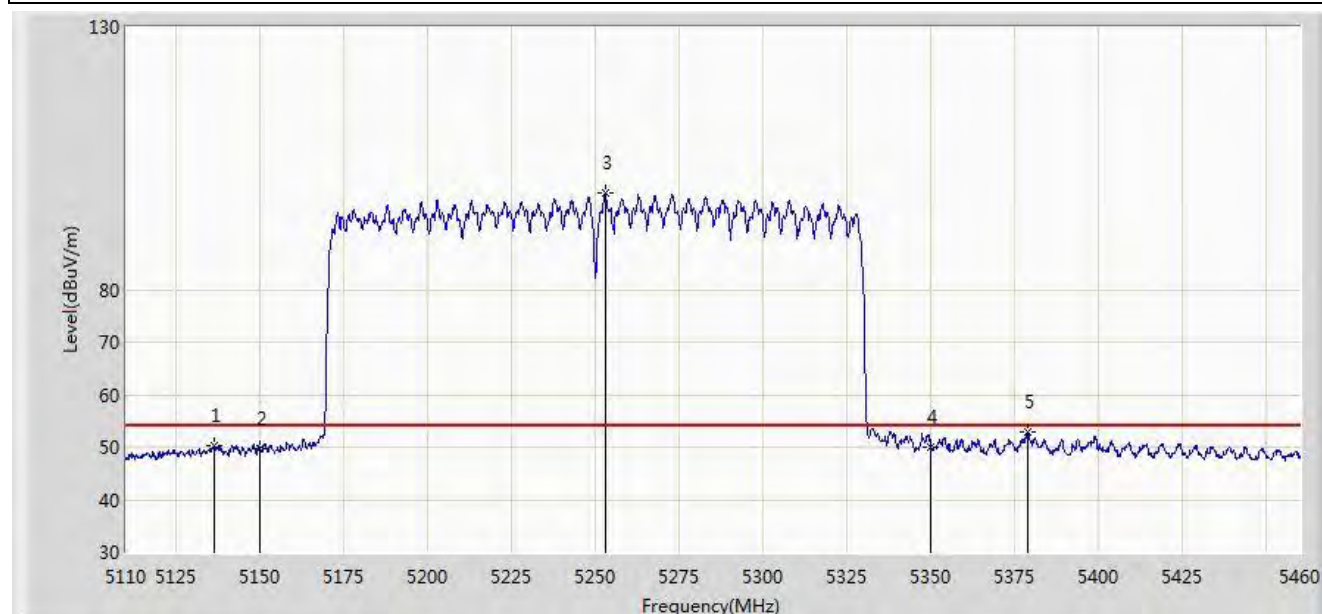


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.250	50.409	46.772	-3.591	54.000	3.637	AV
2			5150.000	49.582	45.936	-4.418	54.000	3.646	AV
3		*	5252.800	98.299	94.587	N/A	N/A	3.712	AV
4			5350.000	49.865	46.091	-4.135	54.000	3.774	AV
5			5378.975	52.837	49.044	-1.163	54.000	3.792	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/09 - 16:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE160 at Channel 5250MHz	

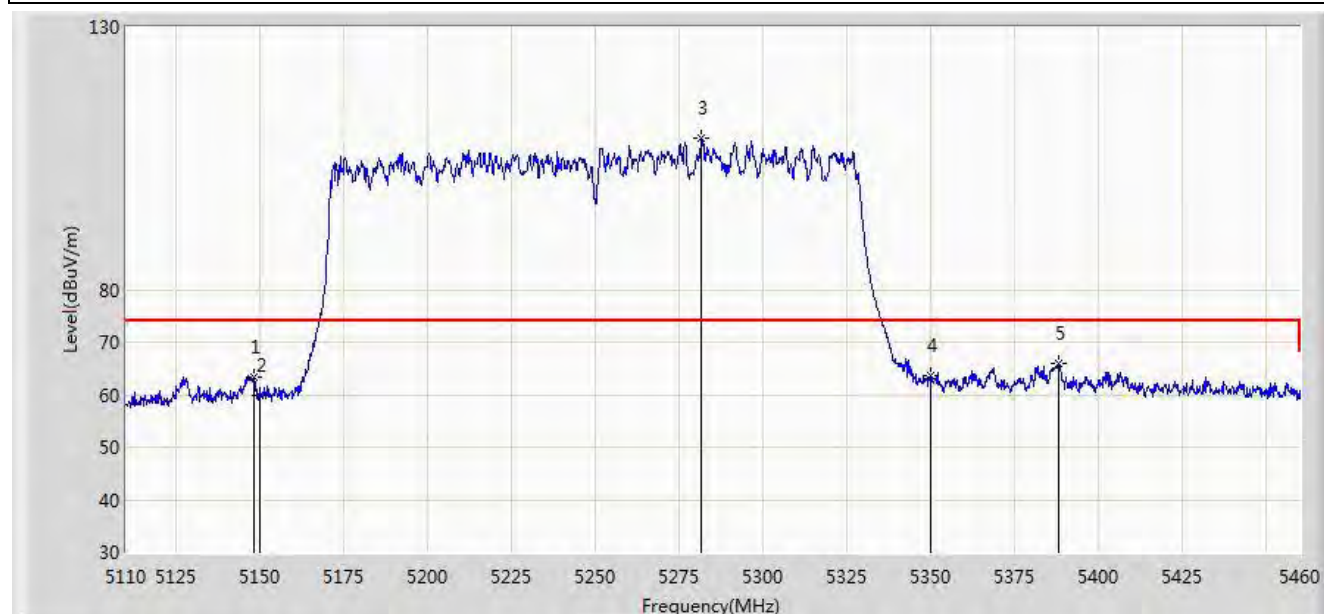


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.325	63.273	59.628	-10.727	74.000	3.645	PK
2			5150.000	59.941	56.295	-14.059	74.000	3.646	PK
3		*	5281.675	108.879	105.149	N/A	N/A	3.730	PK
4			5350.000	63.537	59.763	-10.463	74.000	3.774	PK
5			5387.900	65.924	62.125	-8.076	74.000	3.799	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/09 - 16:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE160 at Channel 5250MHz	

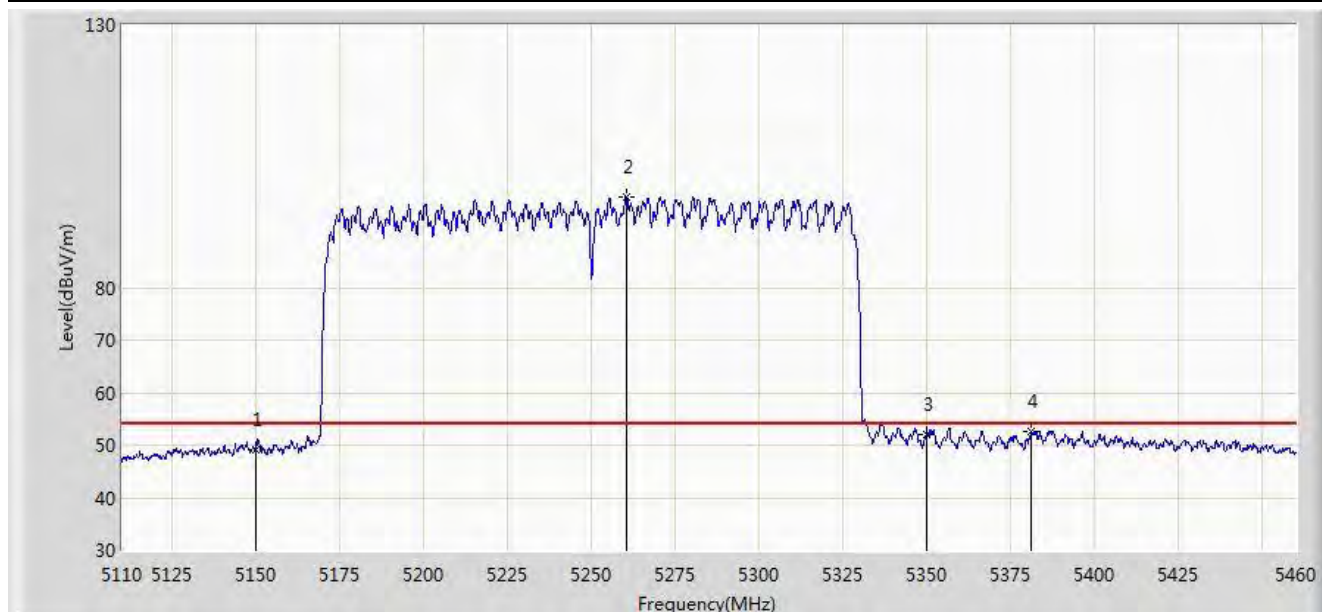


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.248	45.602	-4.752	54.000	3.646	AV
2		*	5260.325	97.296	93.580	43.296	54.000	3.716	AV
3			5350.000	52.122	48.348	-1.878	54.000	3.774	AV
4			5381.250	52.609	48.815	-1.391	54.000	3.794	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/02 - 02:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: ByPOE
Test Mode: Transmit by 802.11 ax-HE160 at Channel 5750MHz	

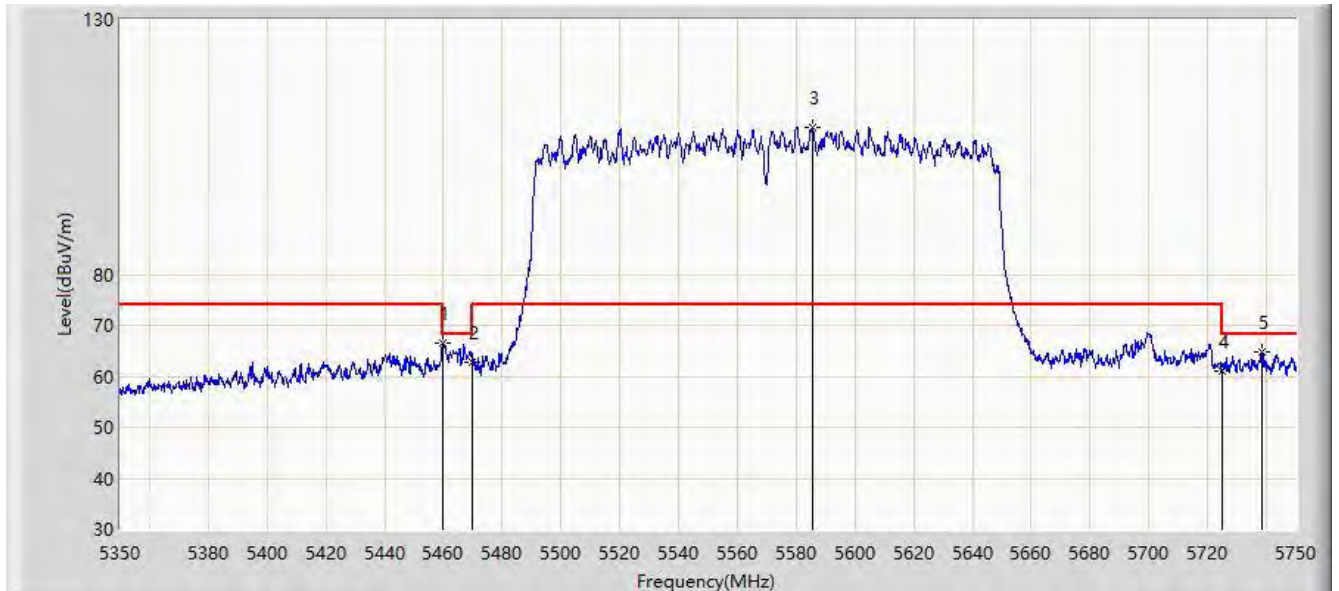


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	66.415	62.571	-7.585	74.000	3.844	PK
2			5470.000	62.866	59.015	-5.334	68.200	3.850	PK
3		*	5585.600	108.910	104.712	34.910	74.000	4.199	PK
4			5725.000	61.058	56.324	-7.142	68.200	4.734	PK
5			5738.400	64.644	59.859	-3.556	68.200	4.785	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/02 - 02:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: ACCESS POINT	Power: ByPOE
Test Mode: Transmit by 802.11 ax-HE160 at Channel 5750MHz	

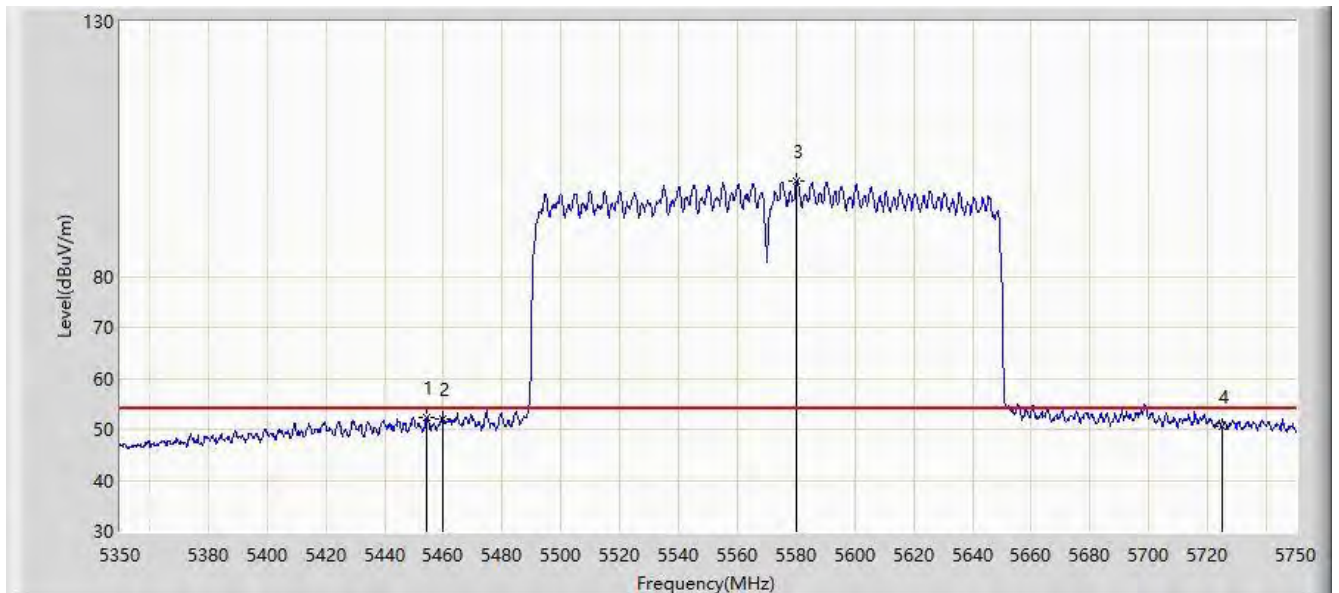


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.200	52.298	48.458	-1.702	54.000	3.840	AV
2			5460.000	52.018	48.174	-1.982	54.000	3.844	AV
3		*	5580.200	98.771	94.593	44.771	54.000	4.177	AV
4			5725.000	50.720	45.986	-3.280	54.000	4.734	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/02 - 02:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: ByPOE
Test Mode: Transmit by 802.11 ax-HE160 at Channel 5750MHz	

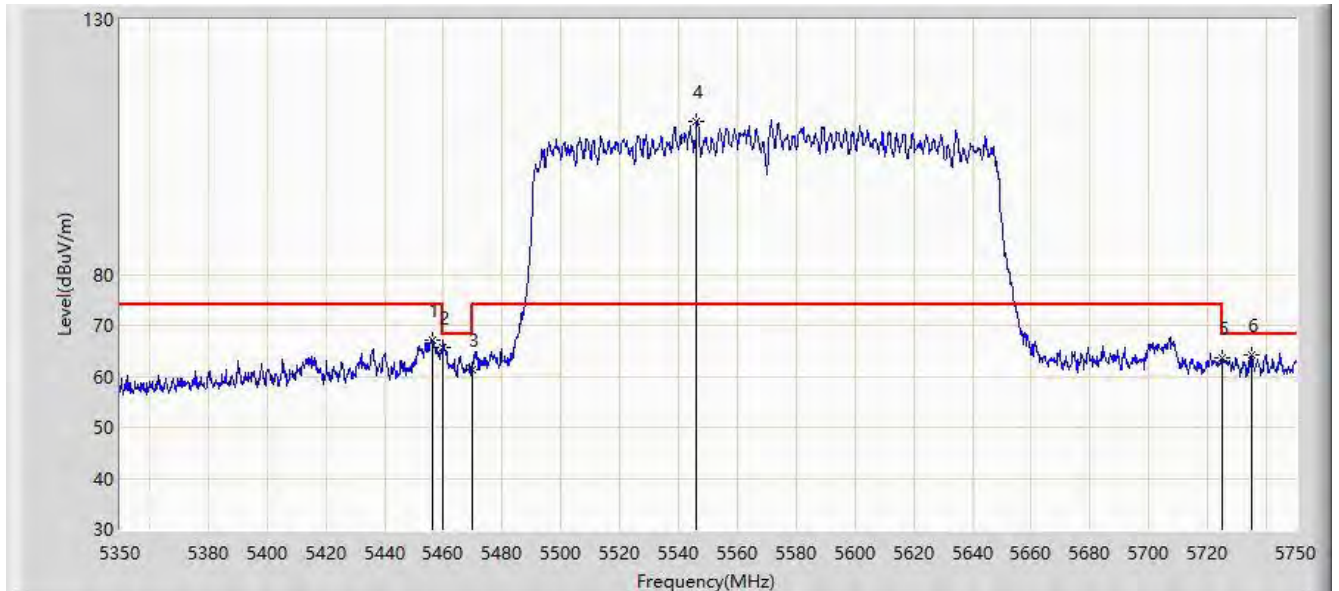


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.200	67.134	63.293	-6.866	74.000	3.841	PK
2			5460.000	65.779	61.935	-8.221	74.000	3.844	PK
3			5470.000	61.196	57.345	-7.004	68.200	3.850	PK
4		*	5546.200	110.040	105.993	36.040	74.000	4.047	PK
5			5725.000	63.734	59.000	-4.466	68.200	4.734	PK
6			5735.200	64.292	59.519	-3.908	68.200	4.772	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/02 - 02:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: ACCESS POINT	Power: ByPOE
Test Mode: Transmit by 802.11 ax-HE160 at Channel 5750MHz	

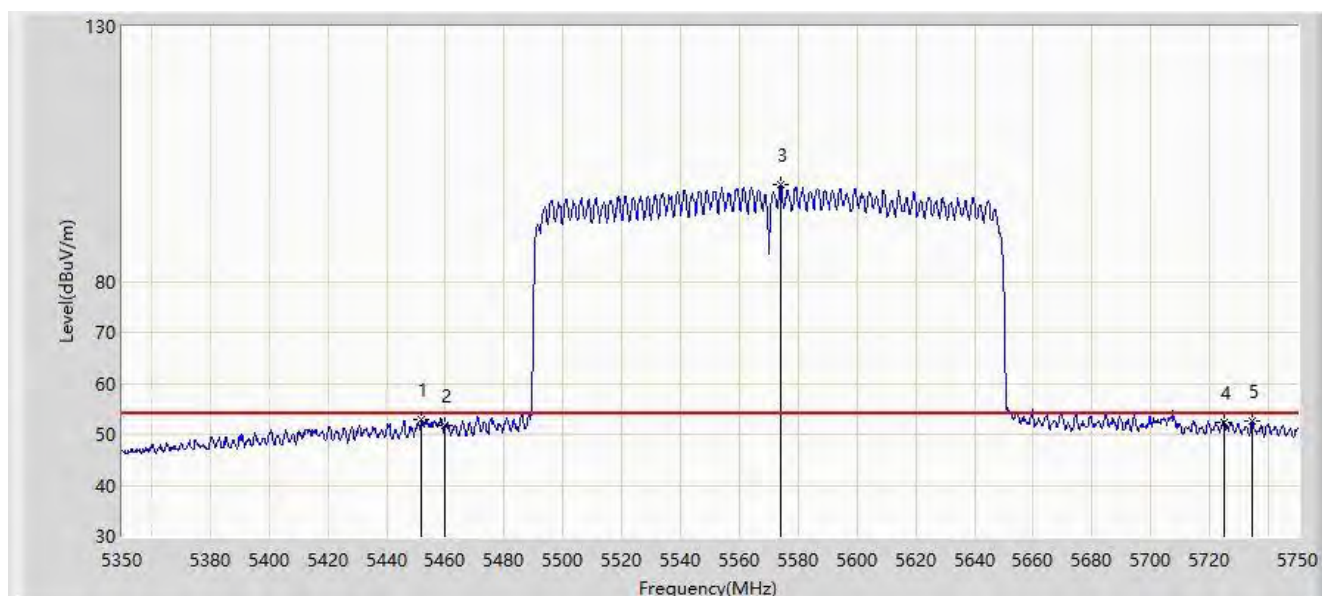

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.000	52.879	49.040	-1.121	54.000	3.839	AV
2			5460.000	51.742	47.898	-2.258	54.000	3.844	AV
3		*	5574.200	99.048	94.893	45.048	54.000	4.154	AV
4			5725.000	52.238	47.504	-1.762	54.000	4.734	AV
5			5734.600	52.747	47.976	-1.253	54.000	4.771	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

The End