





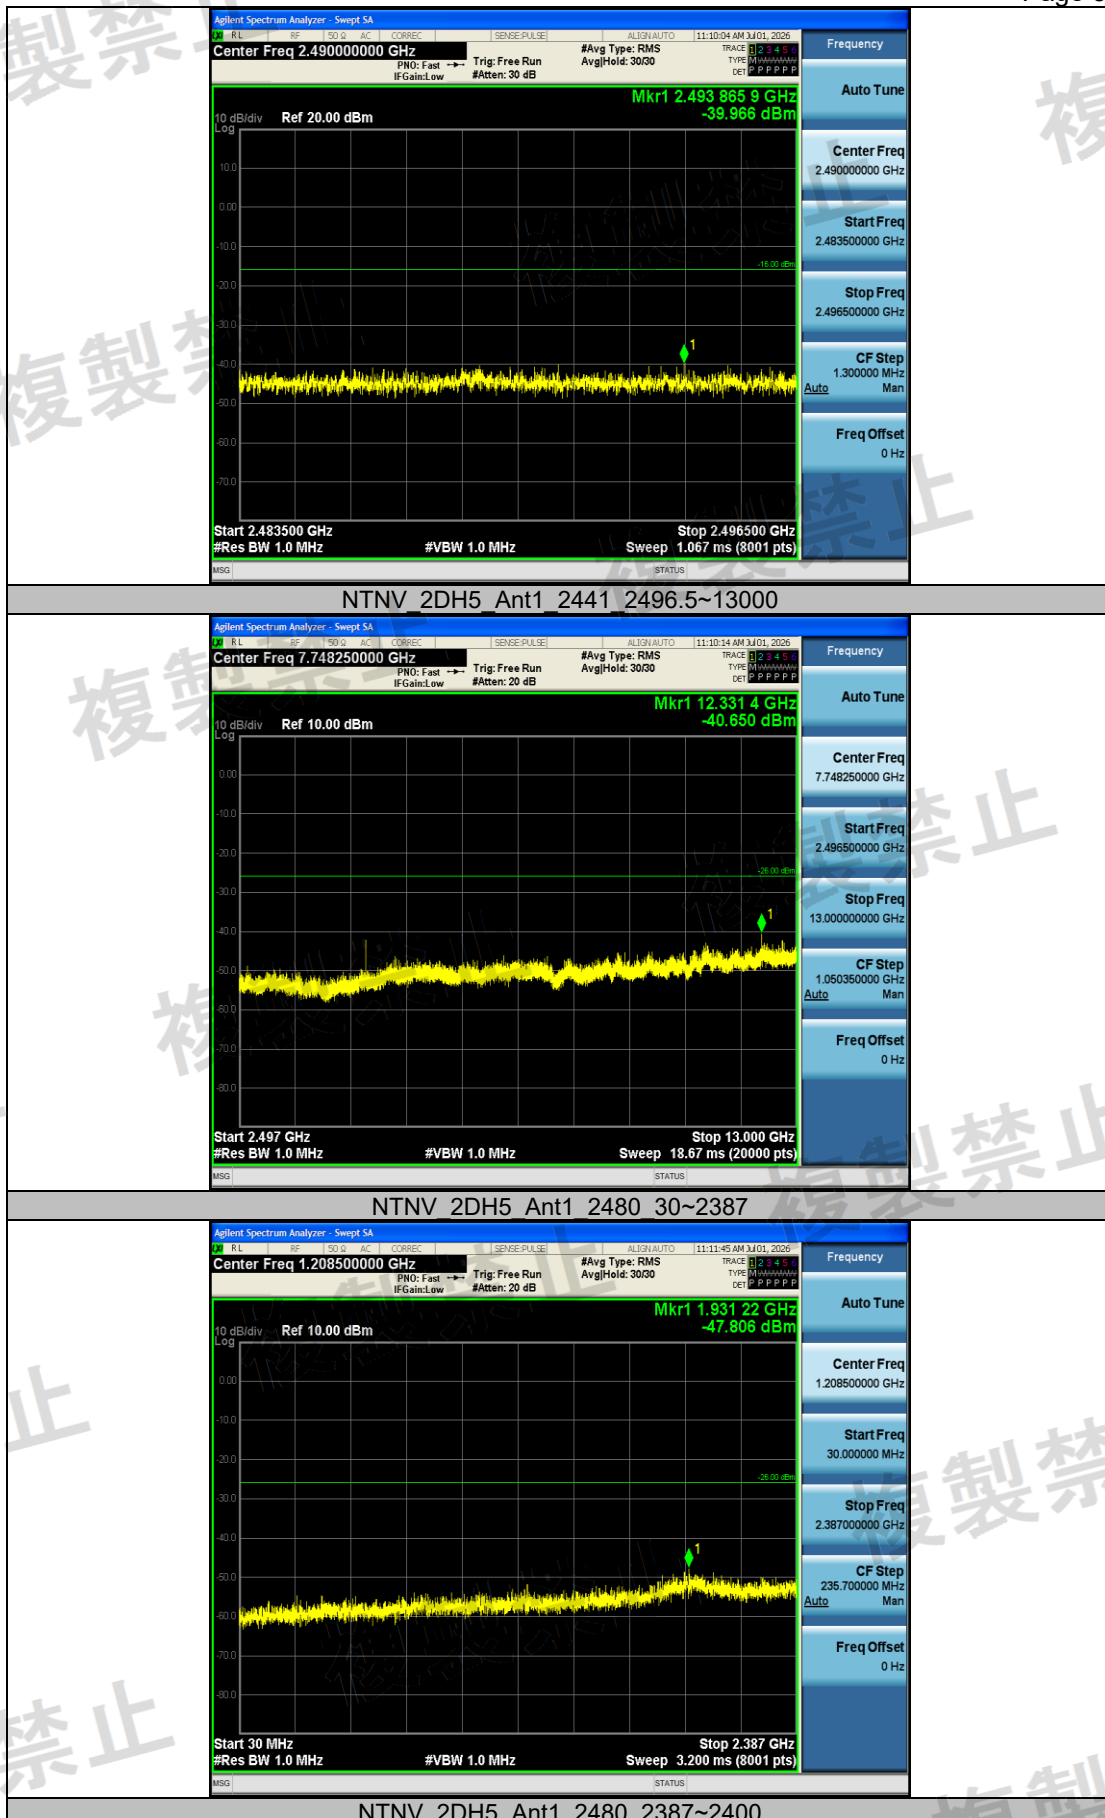

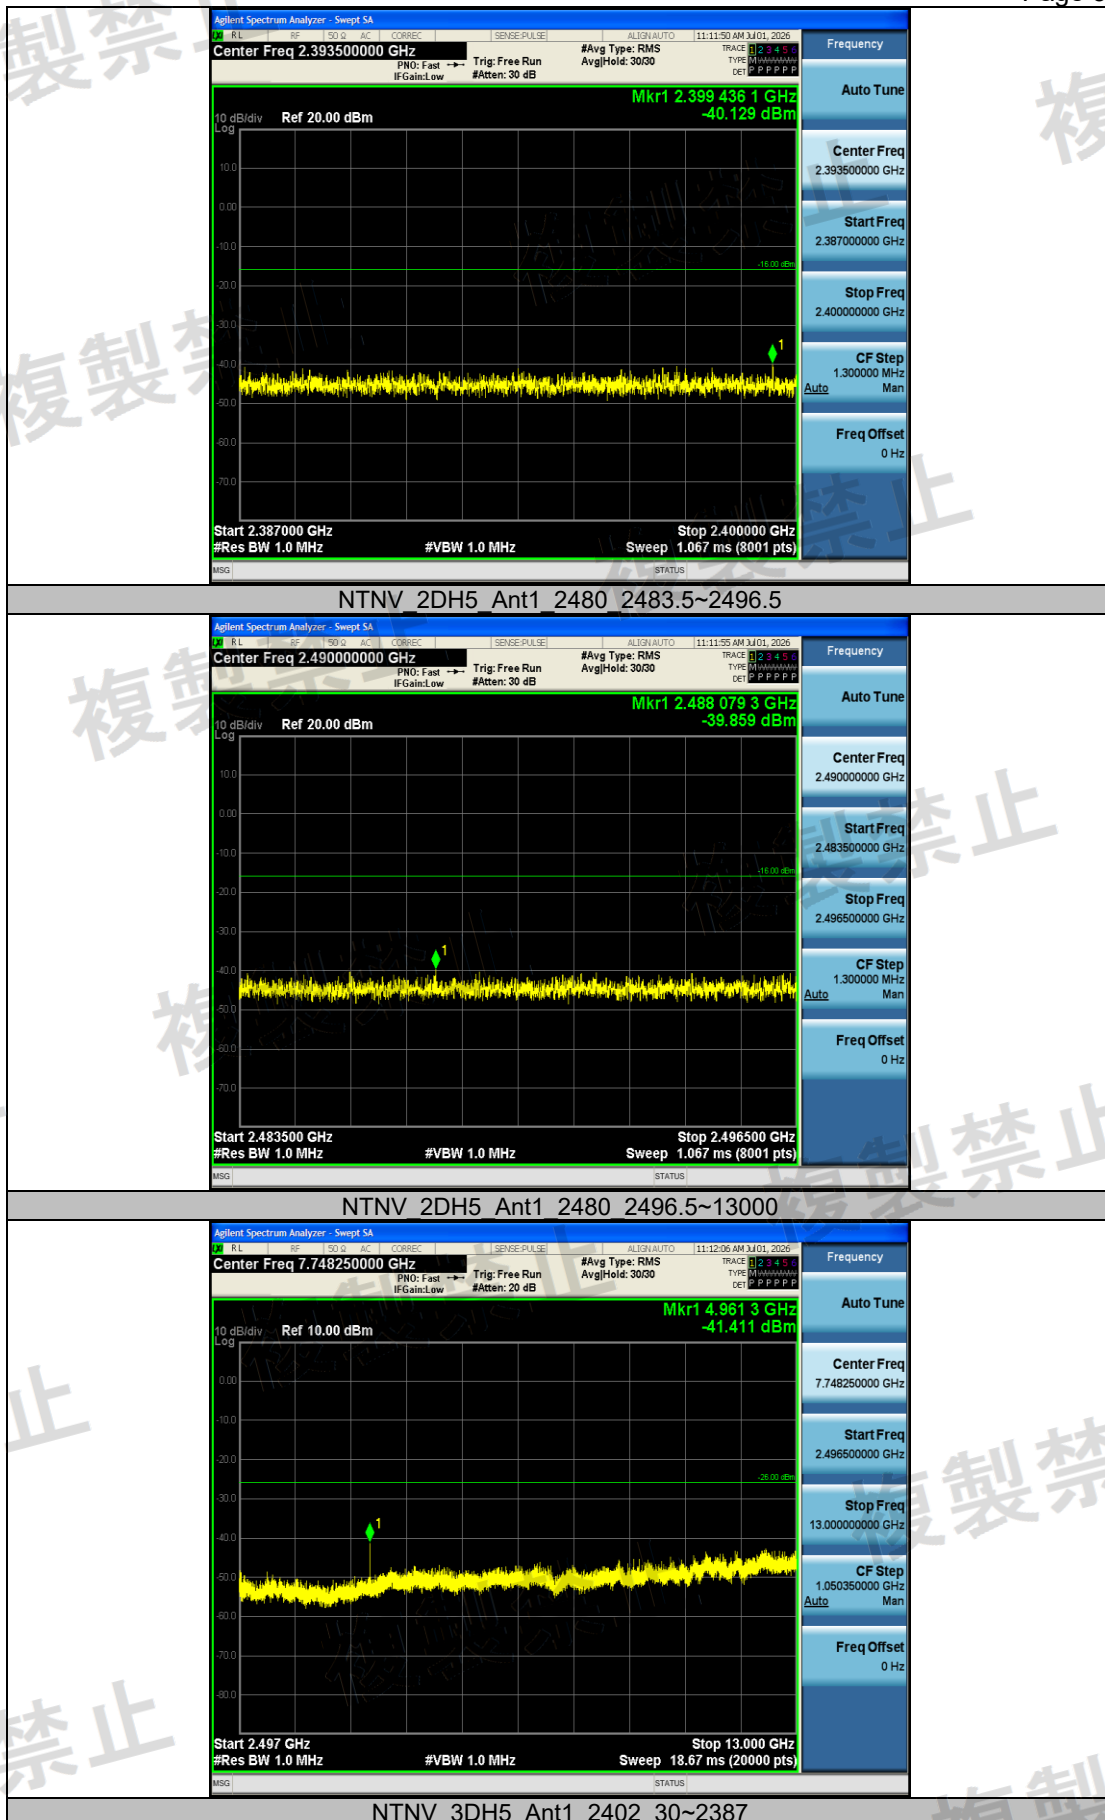


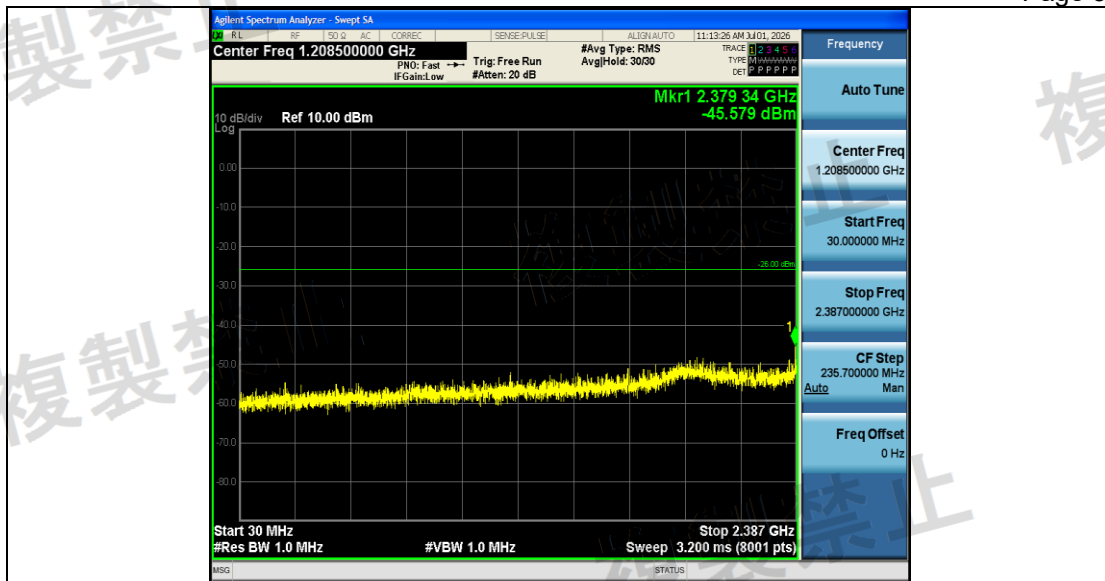

NTNV 3DH5 Ant1 2402 2387~2400

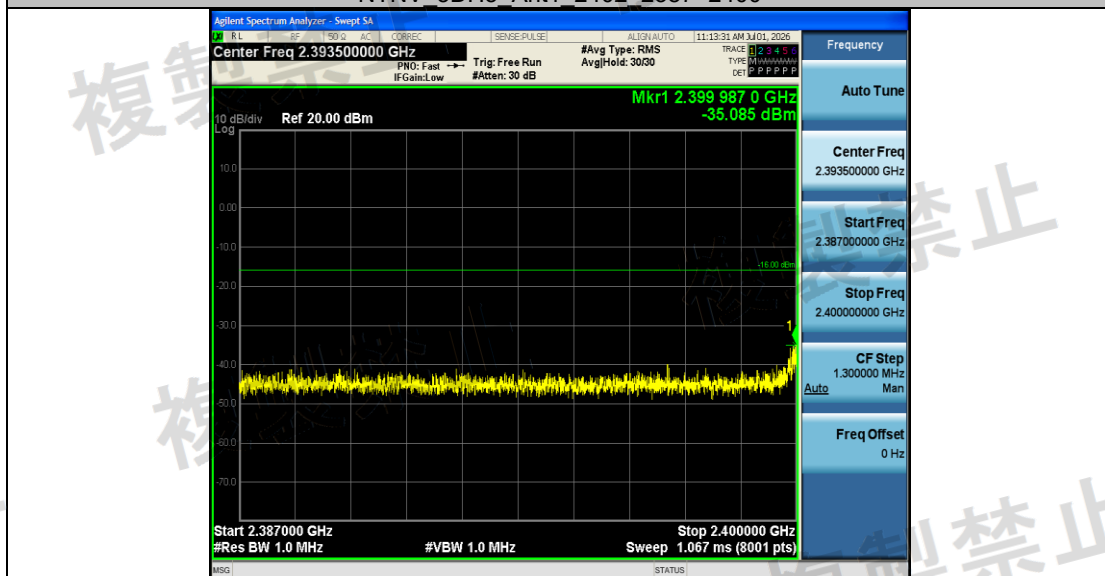



NTNV 3DH5 Ant1 2402 2483.5~2496.5

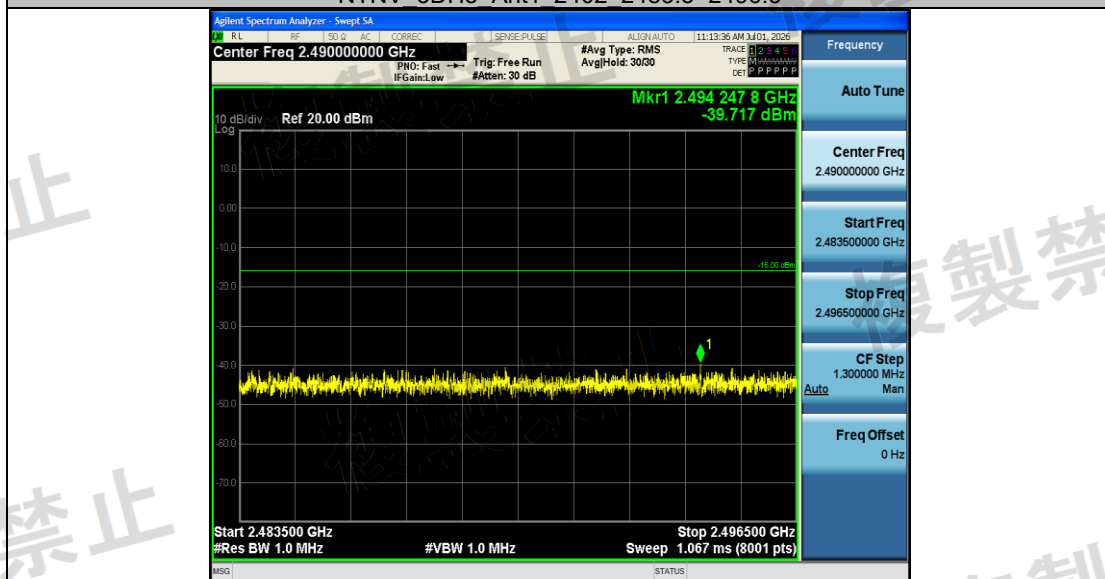



NTNV 3DH5 Ant1 2402 2496.5~13000



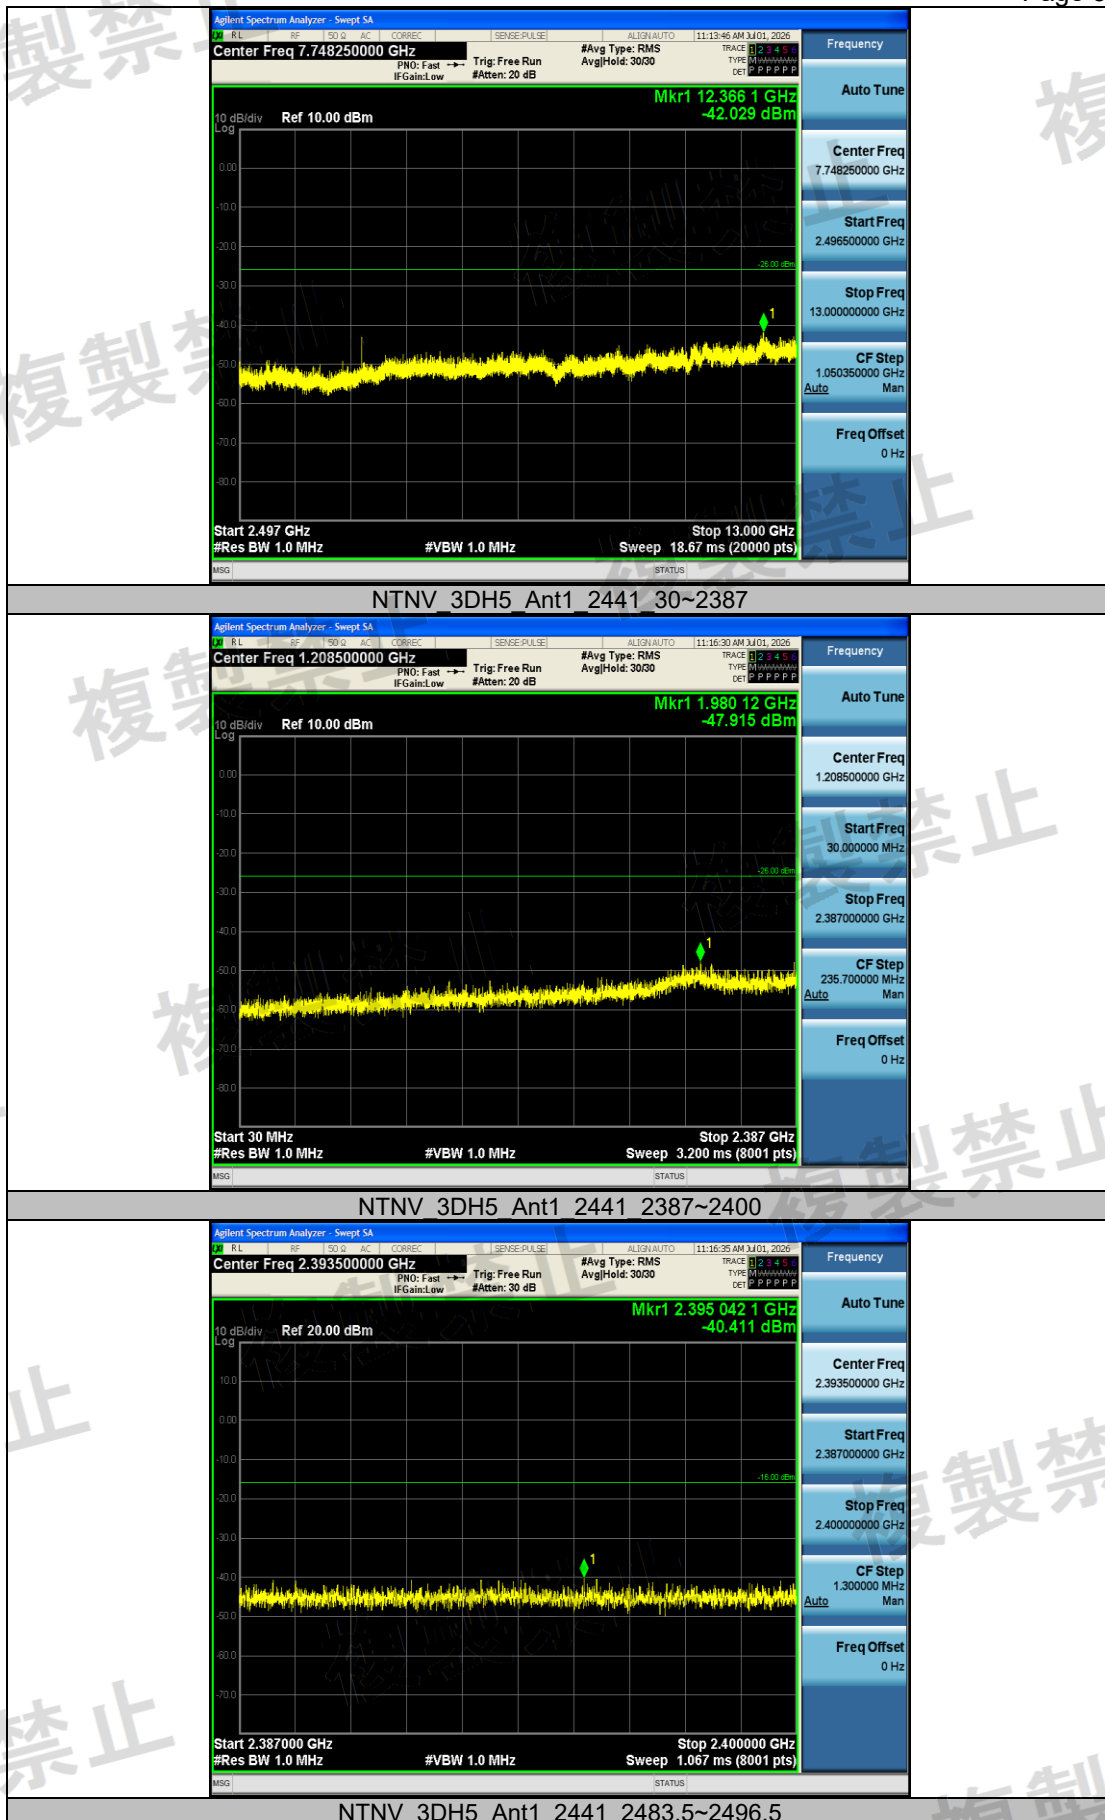


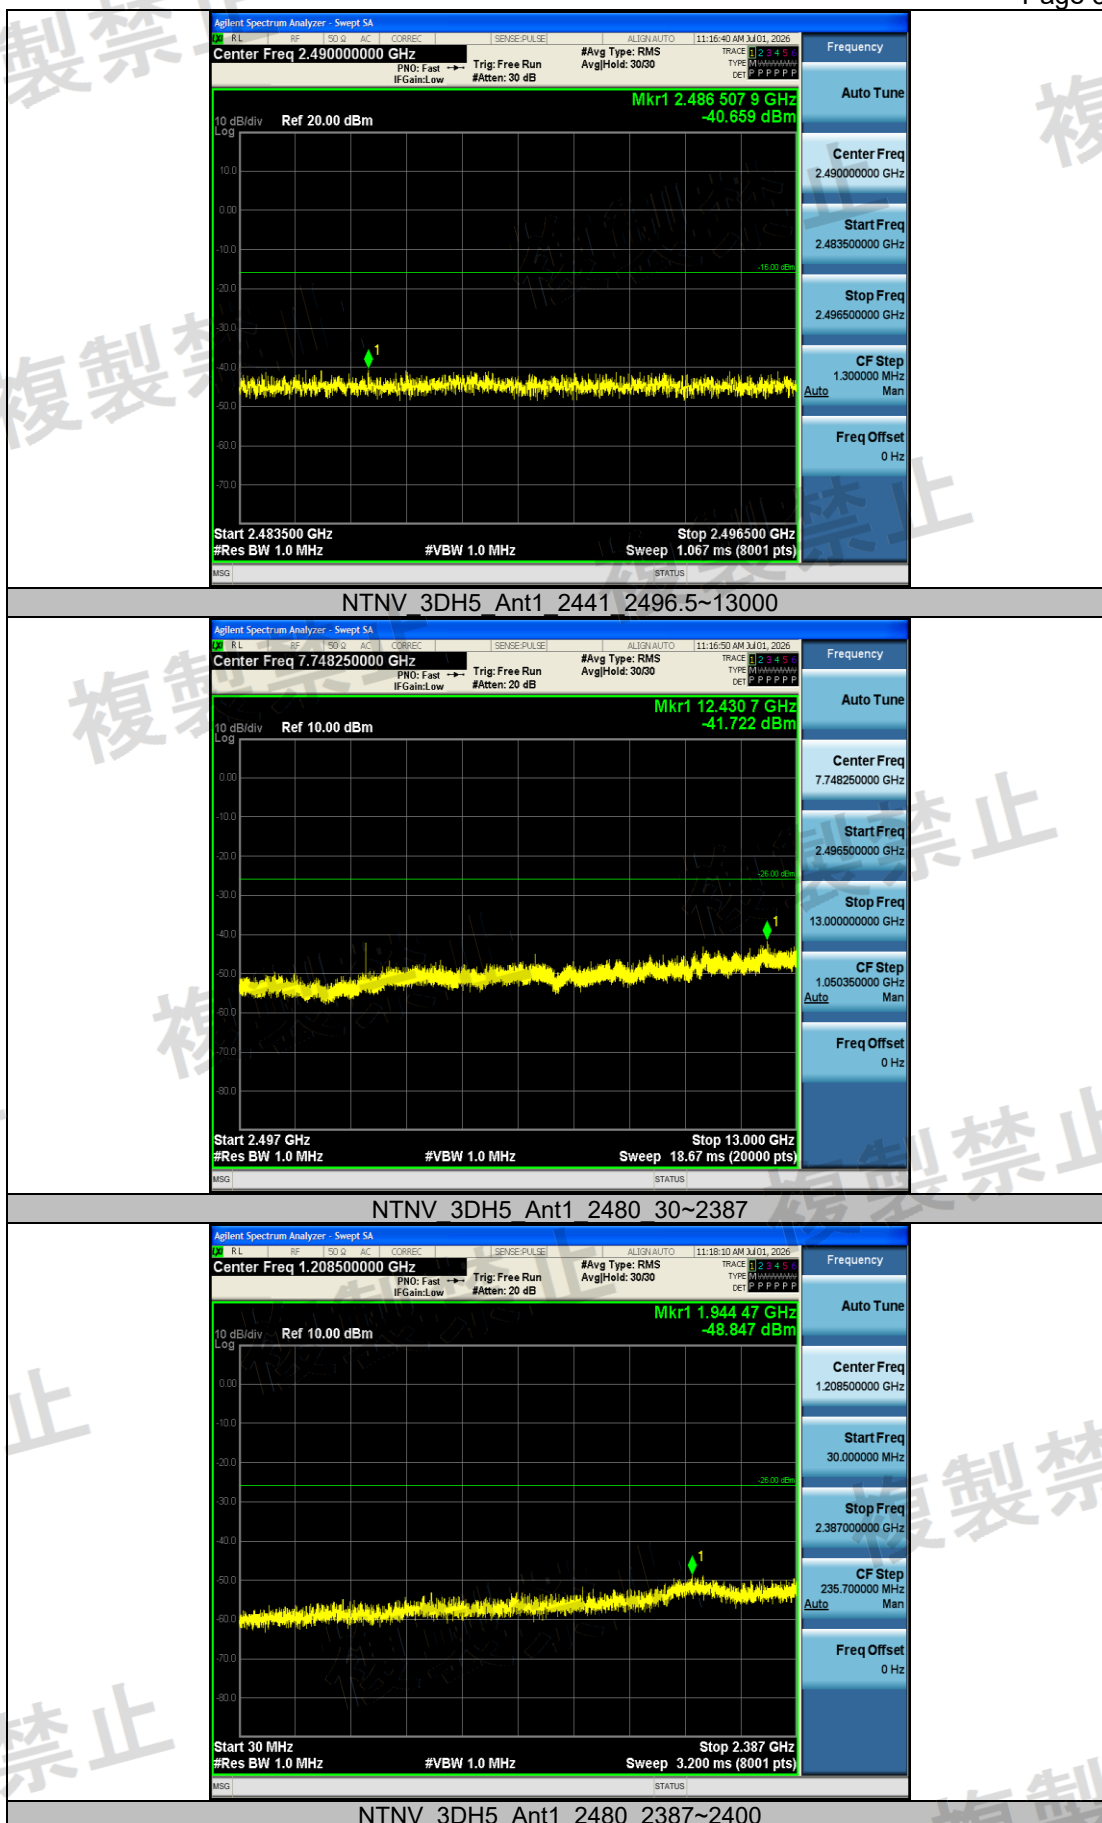

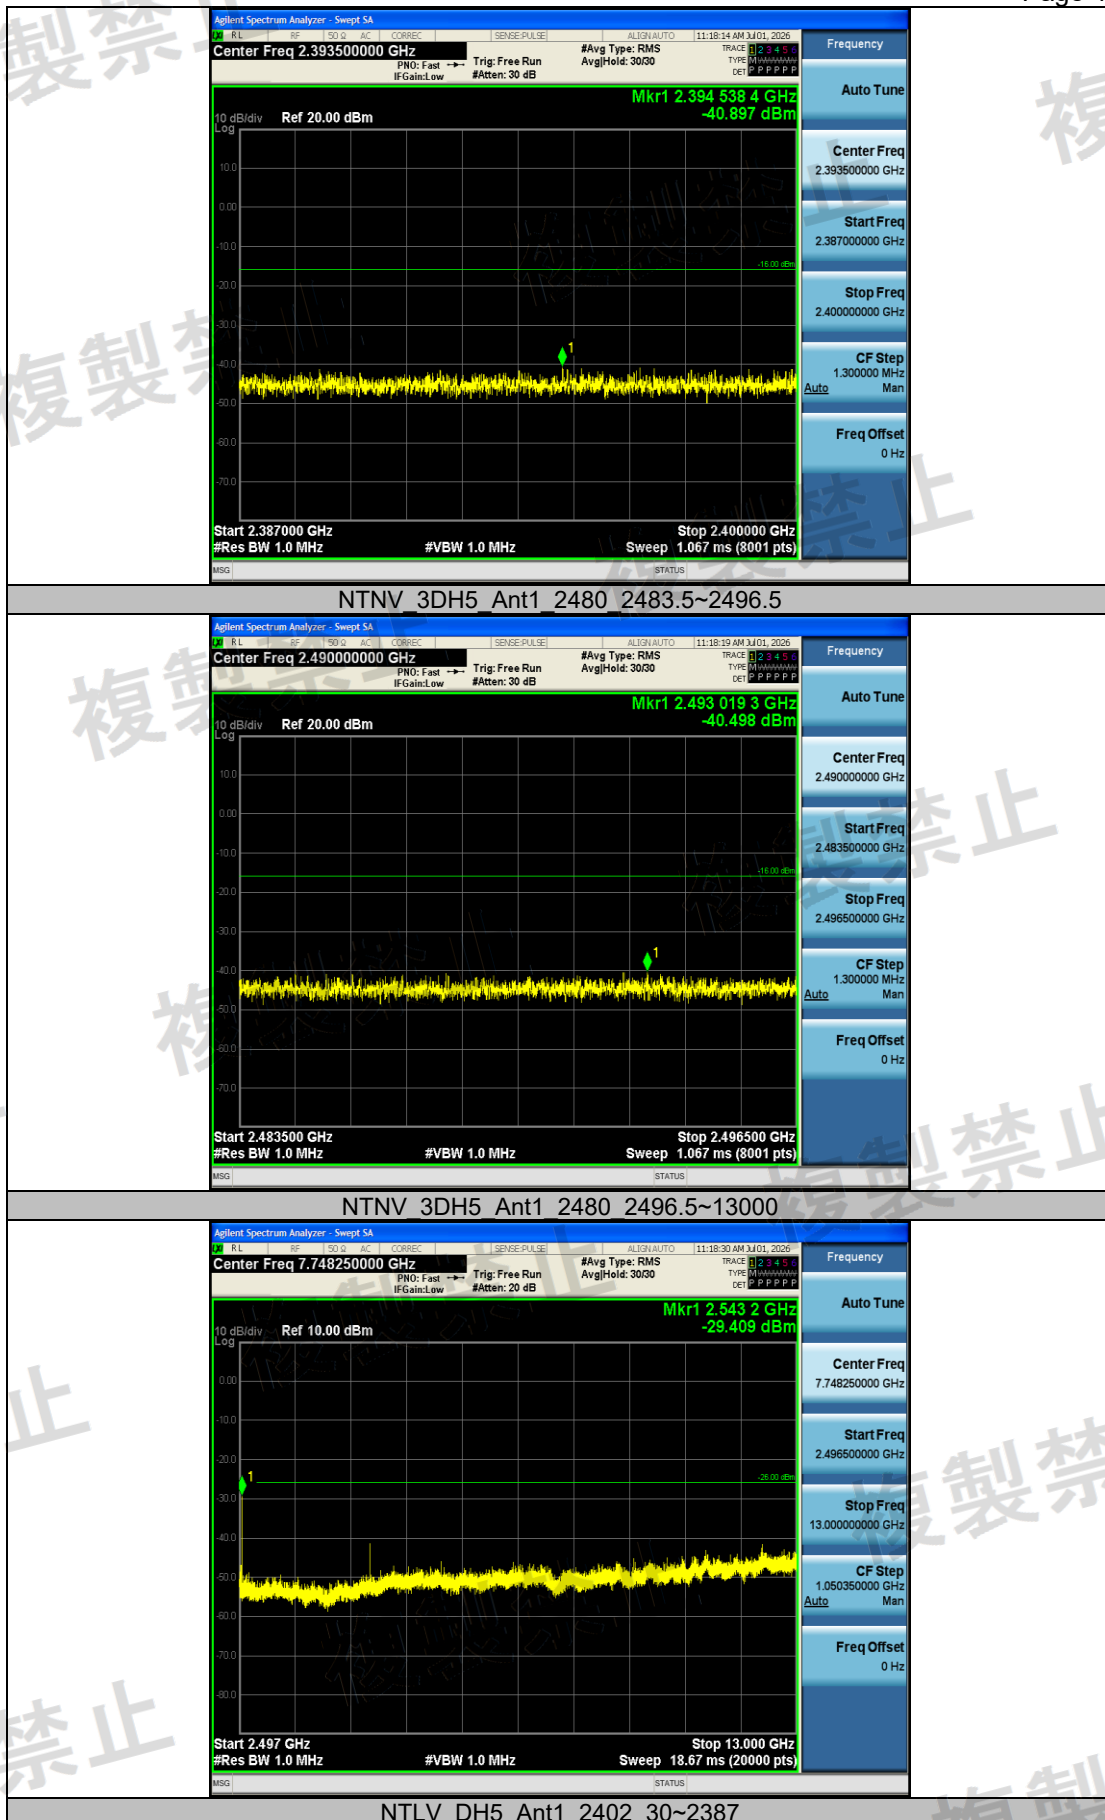


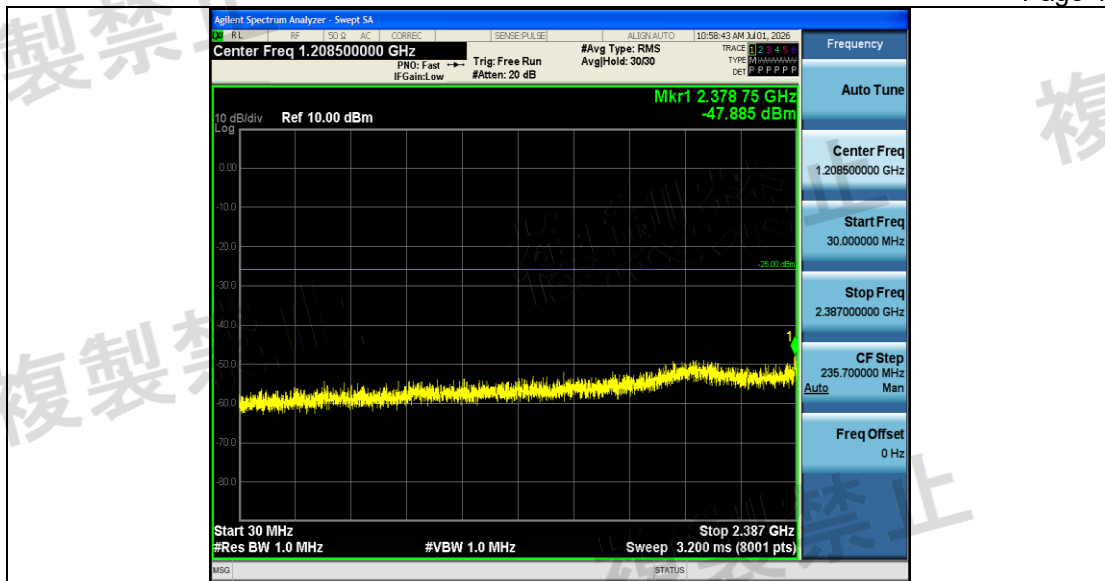

NTLV_DH5_Ant1_2402_2387~2400

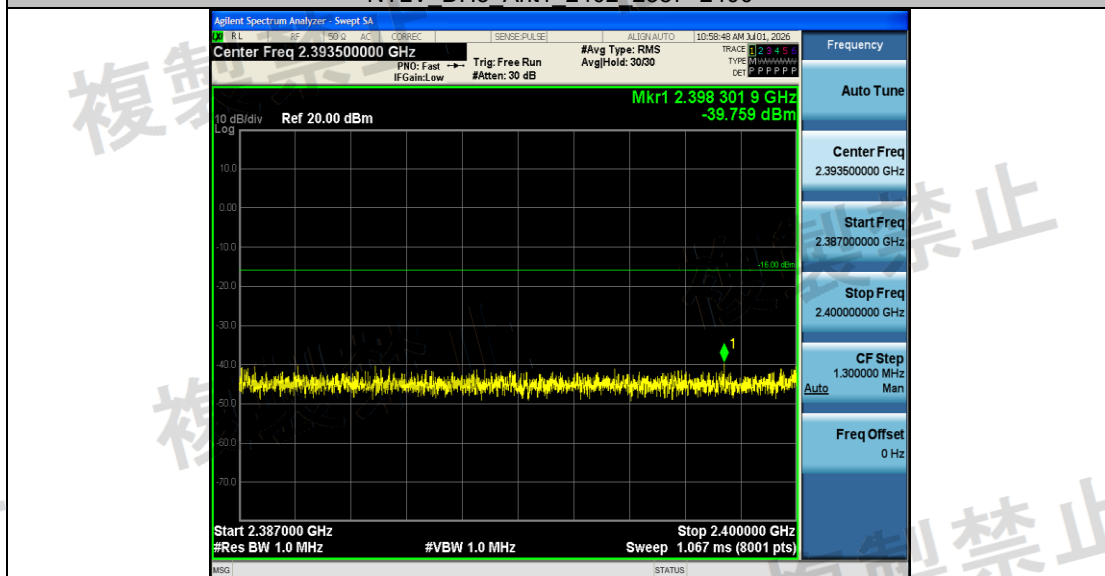





NTLV_DH5_Ant1_2402_2483.5~2496.5



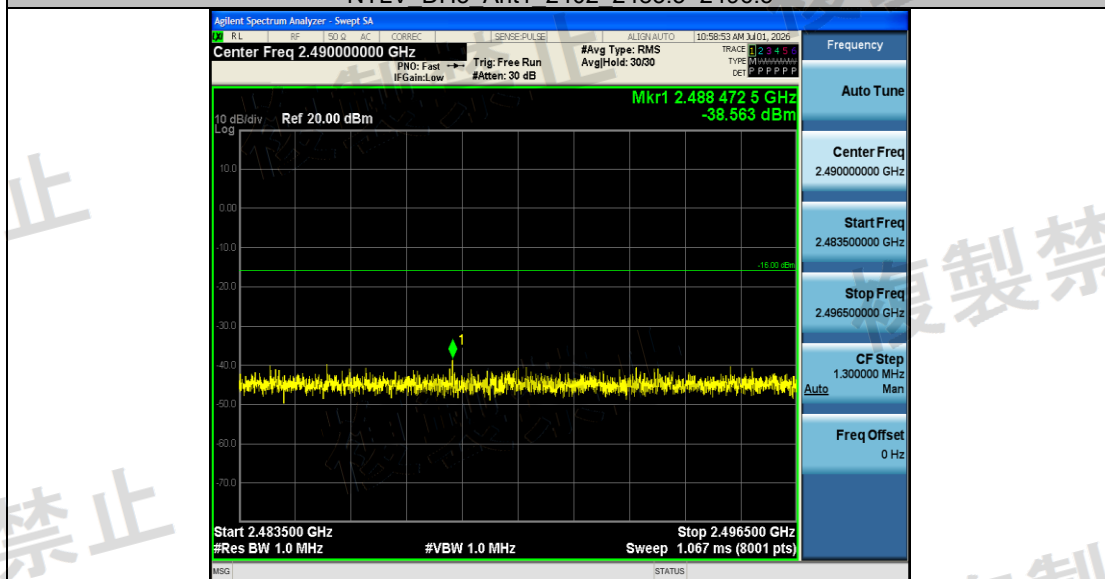



NTLV_DH5_Ant1_2402_2496.5~13000



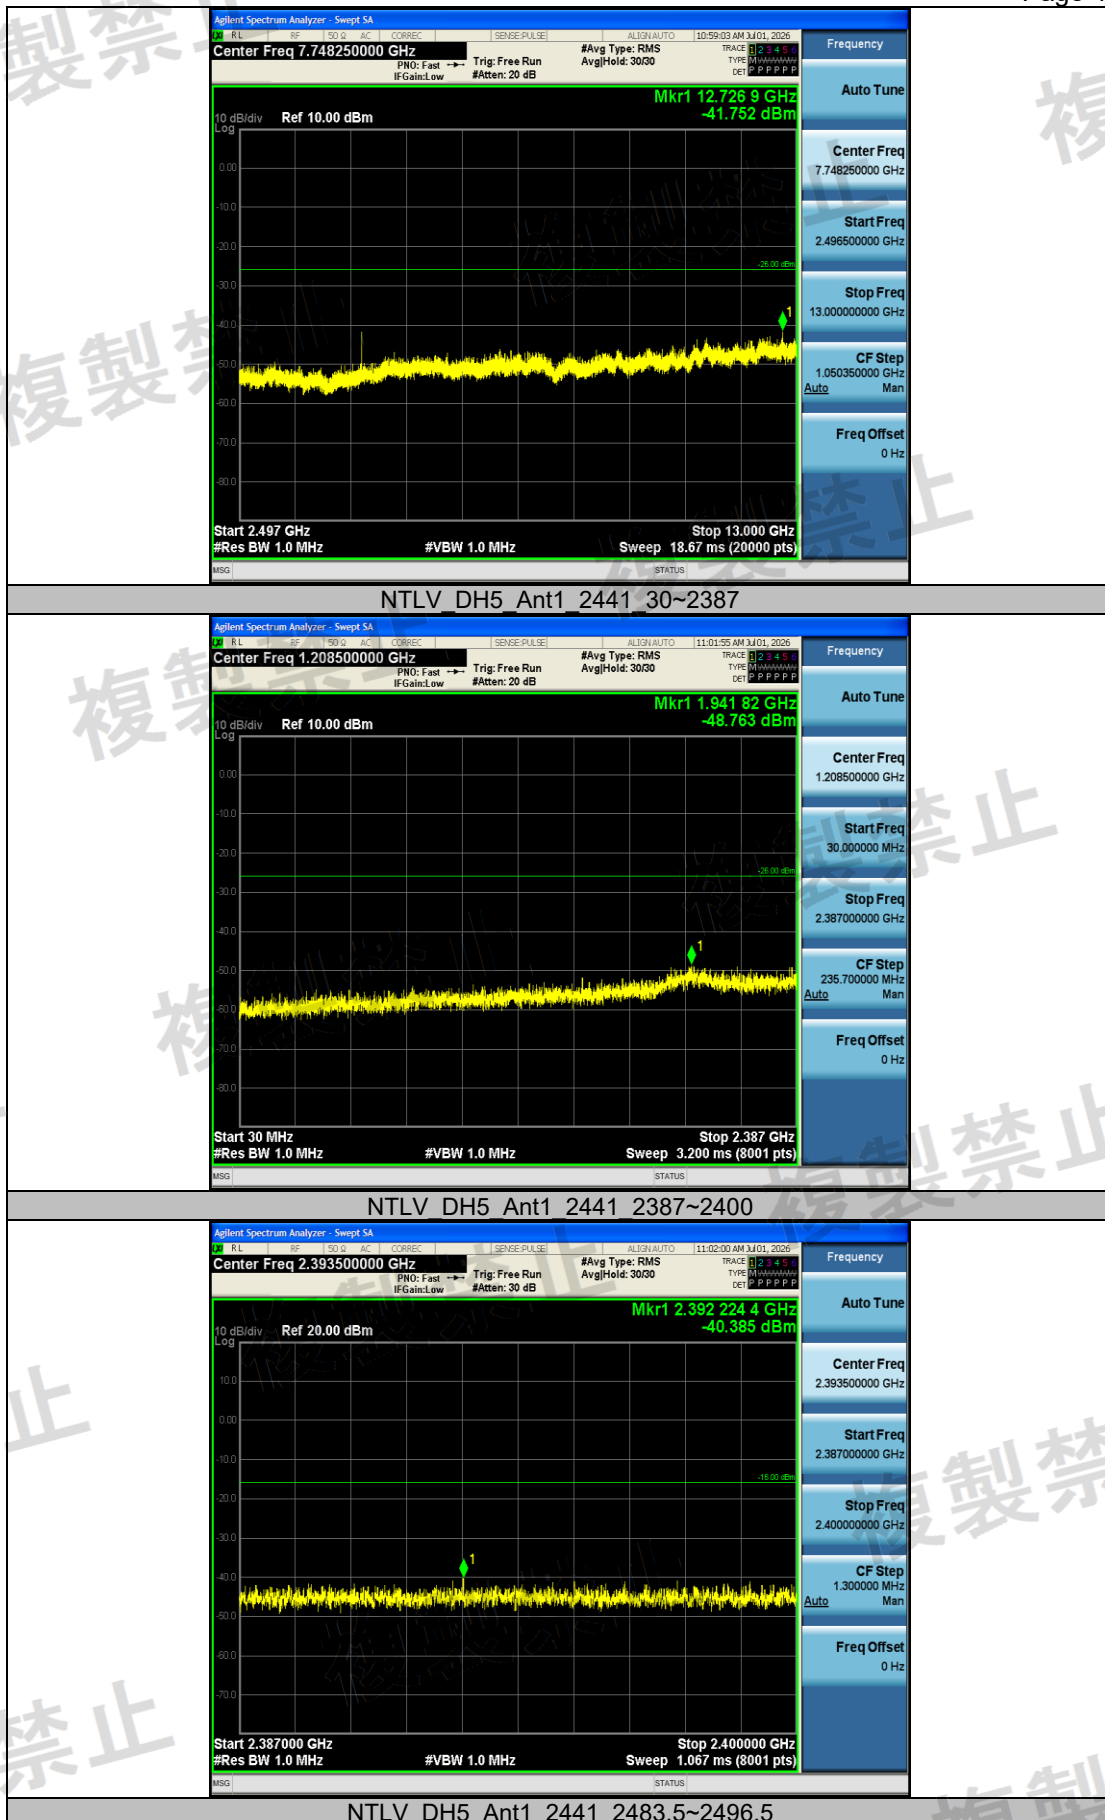


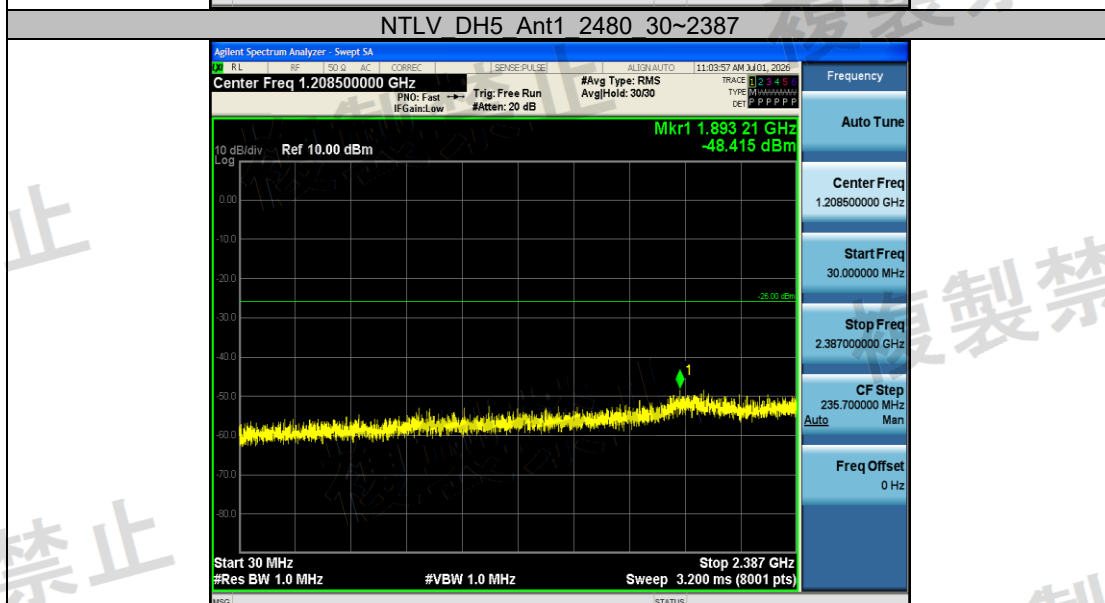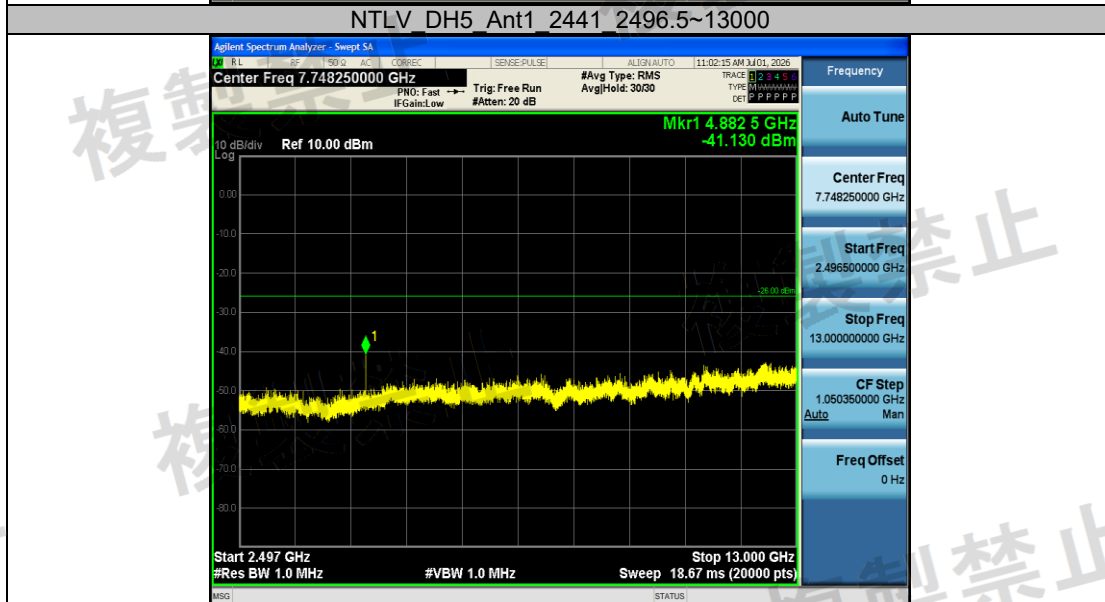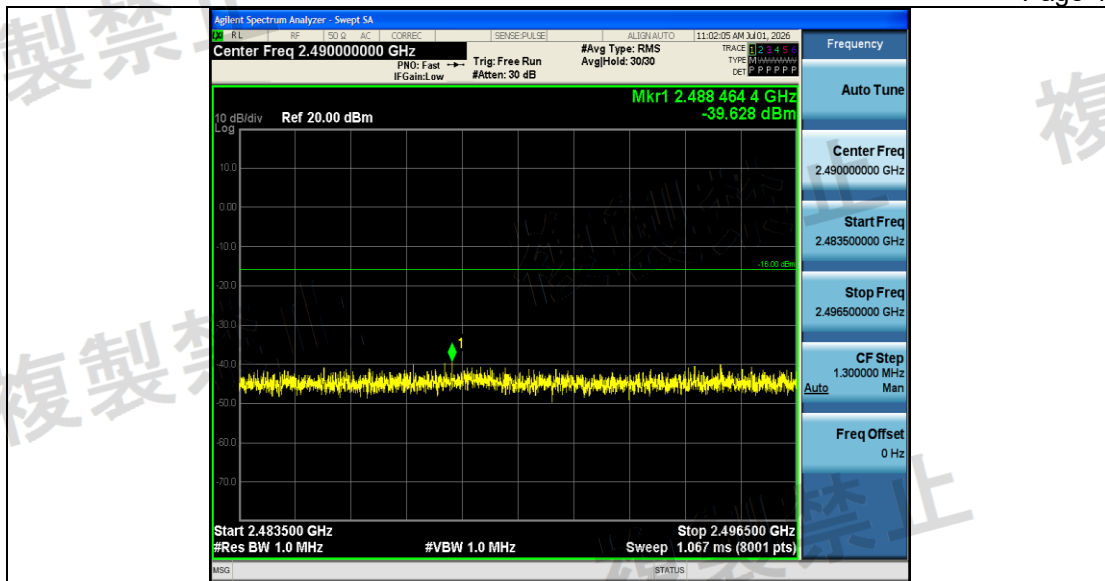

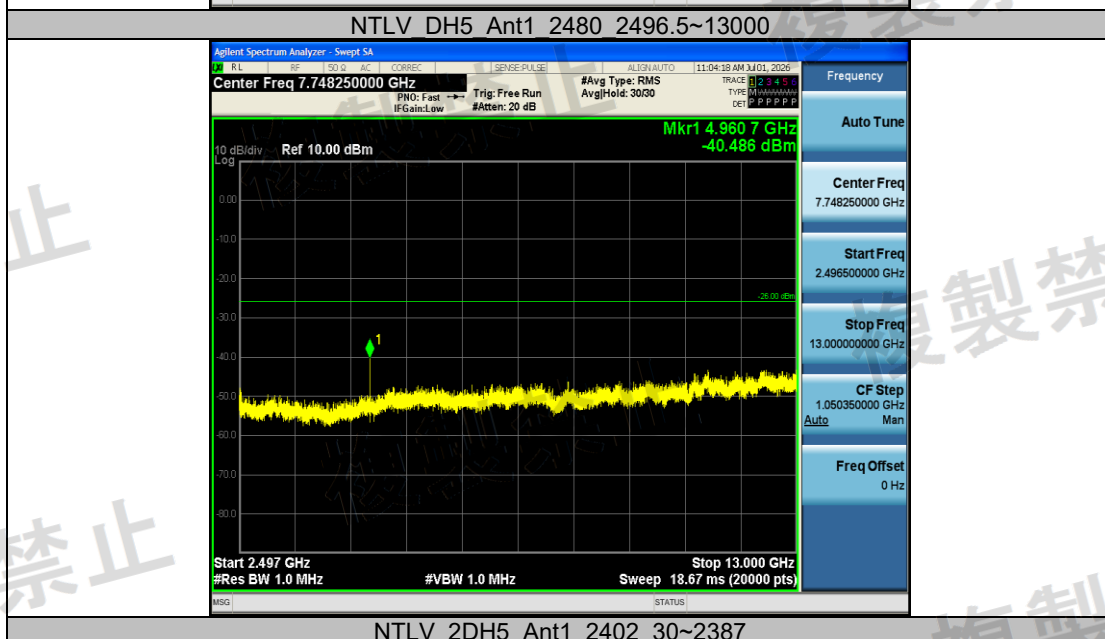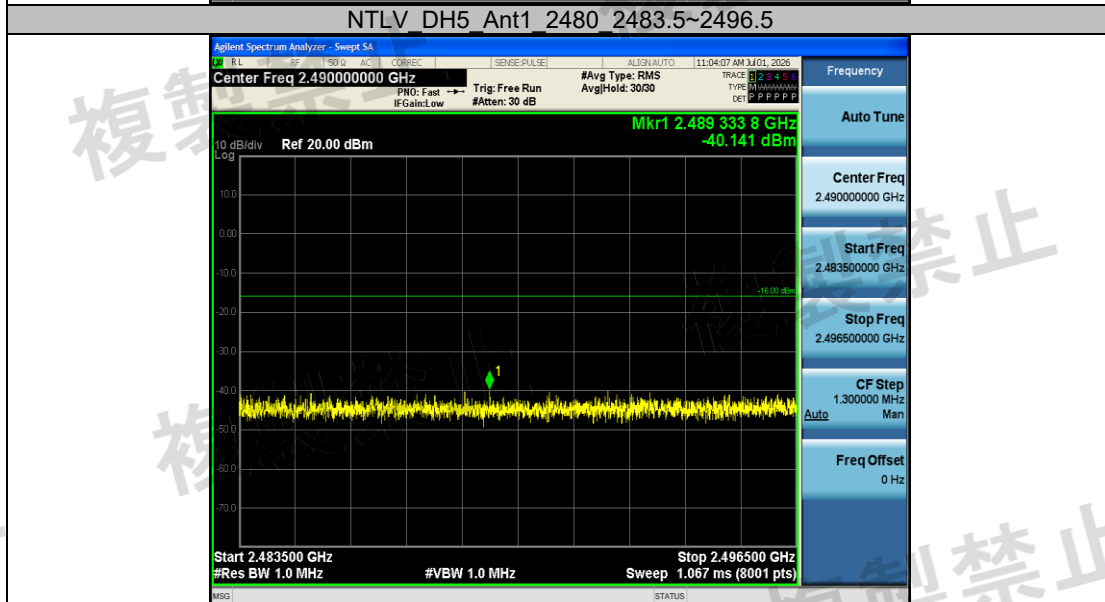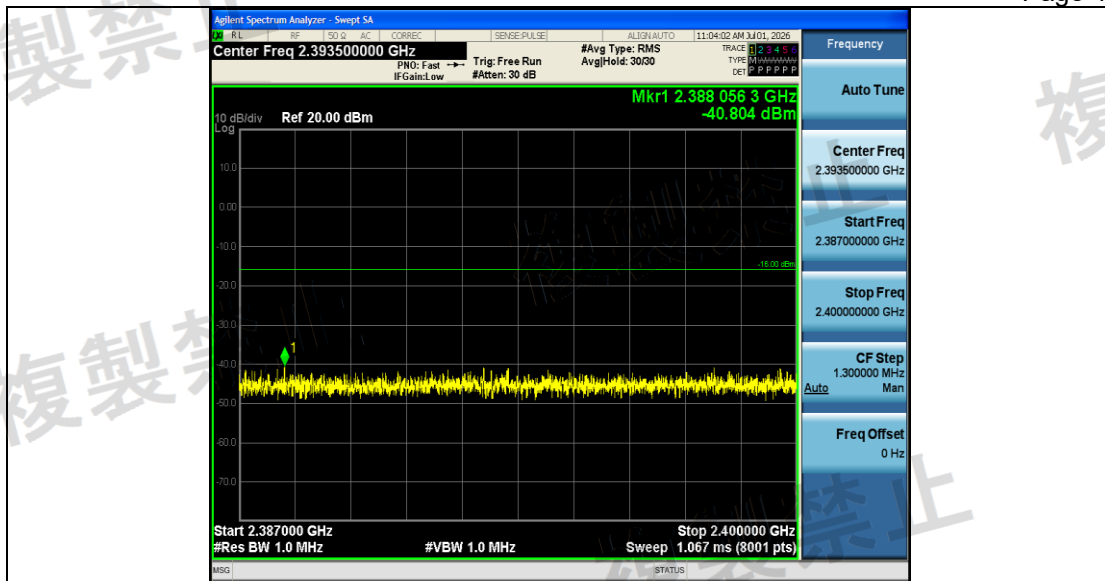


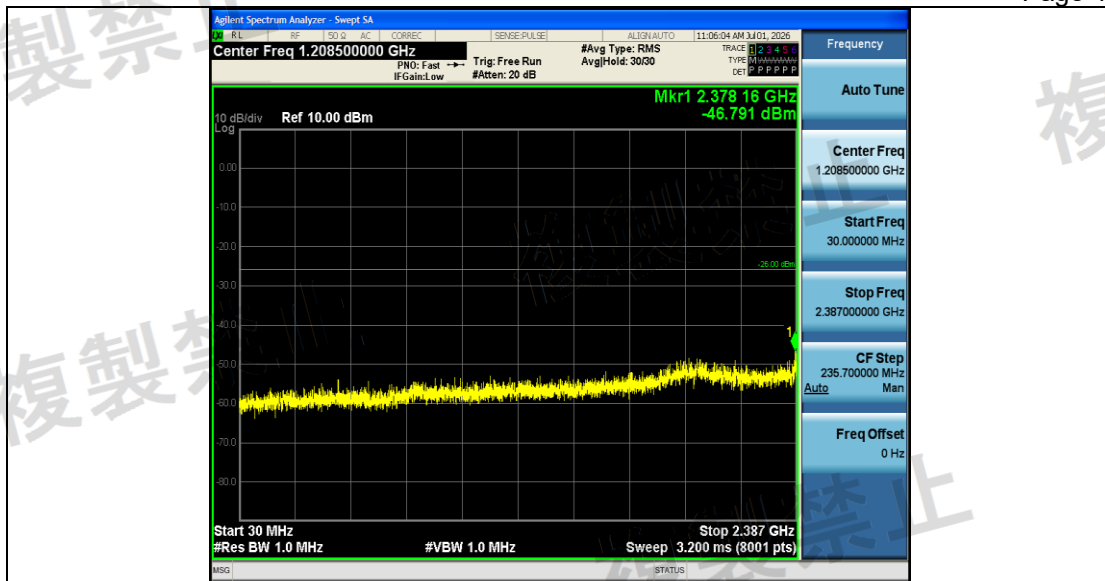

NTLV 2DH5 Ant1 2402 2387~2400

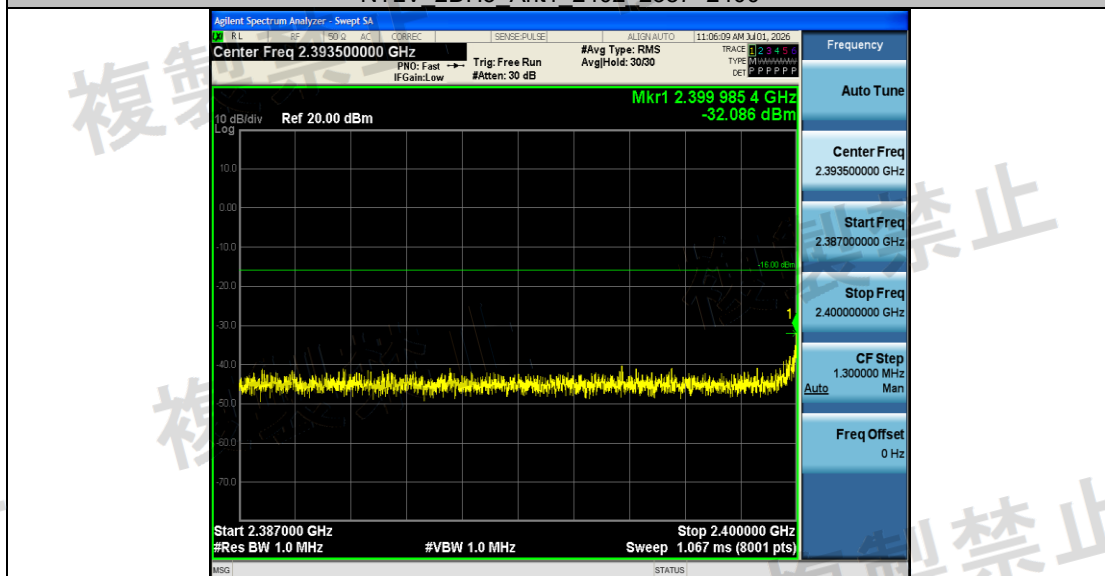





NTLV 2DH5 Ant1 2402 2483.5~2496.5



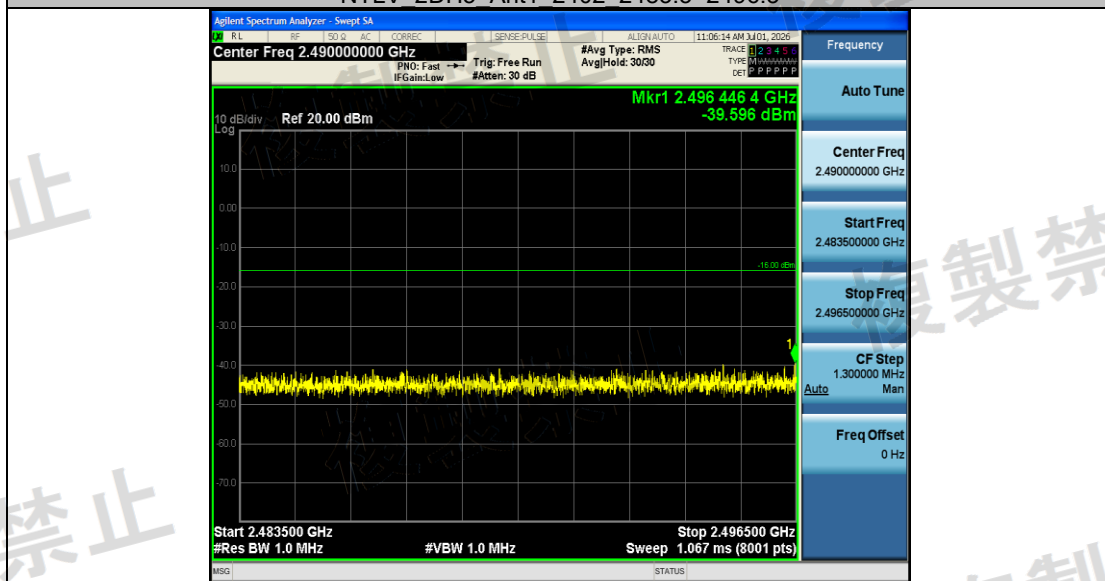



NTLV 2DH5 Ant1 2402 2496.5~13000



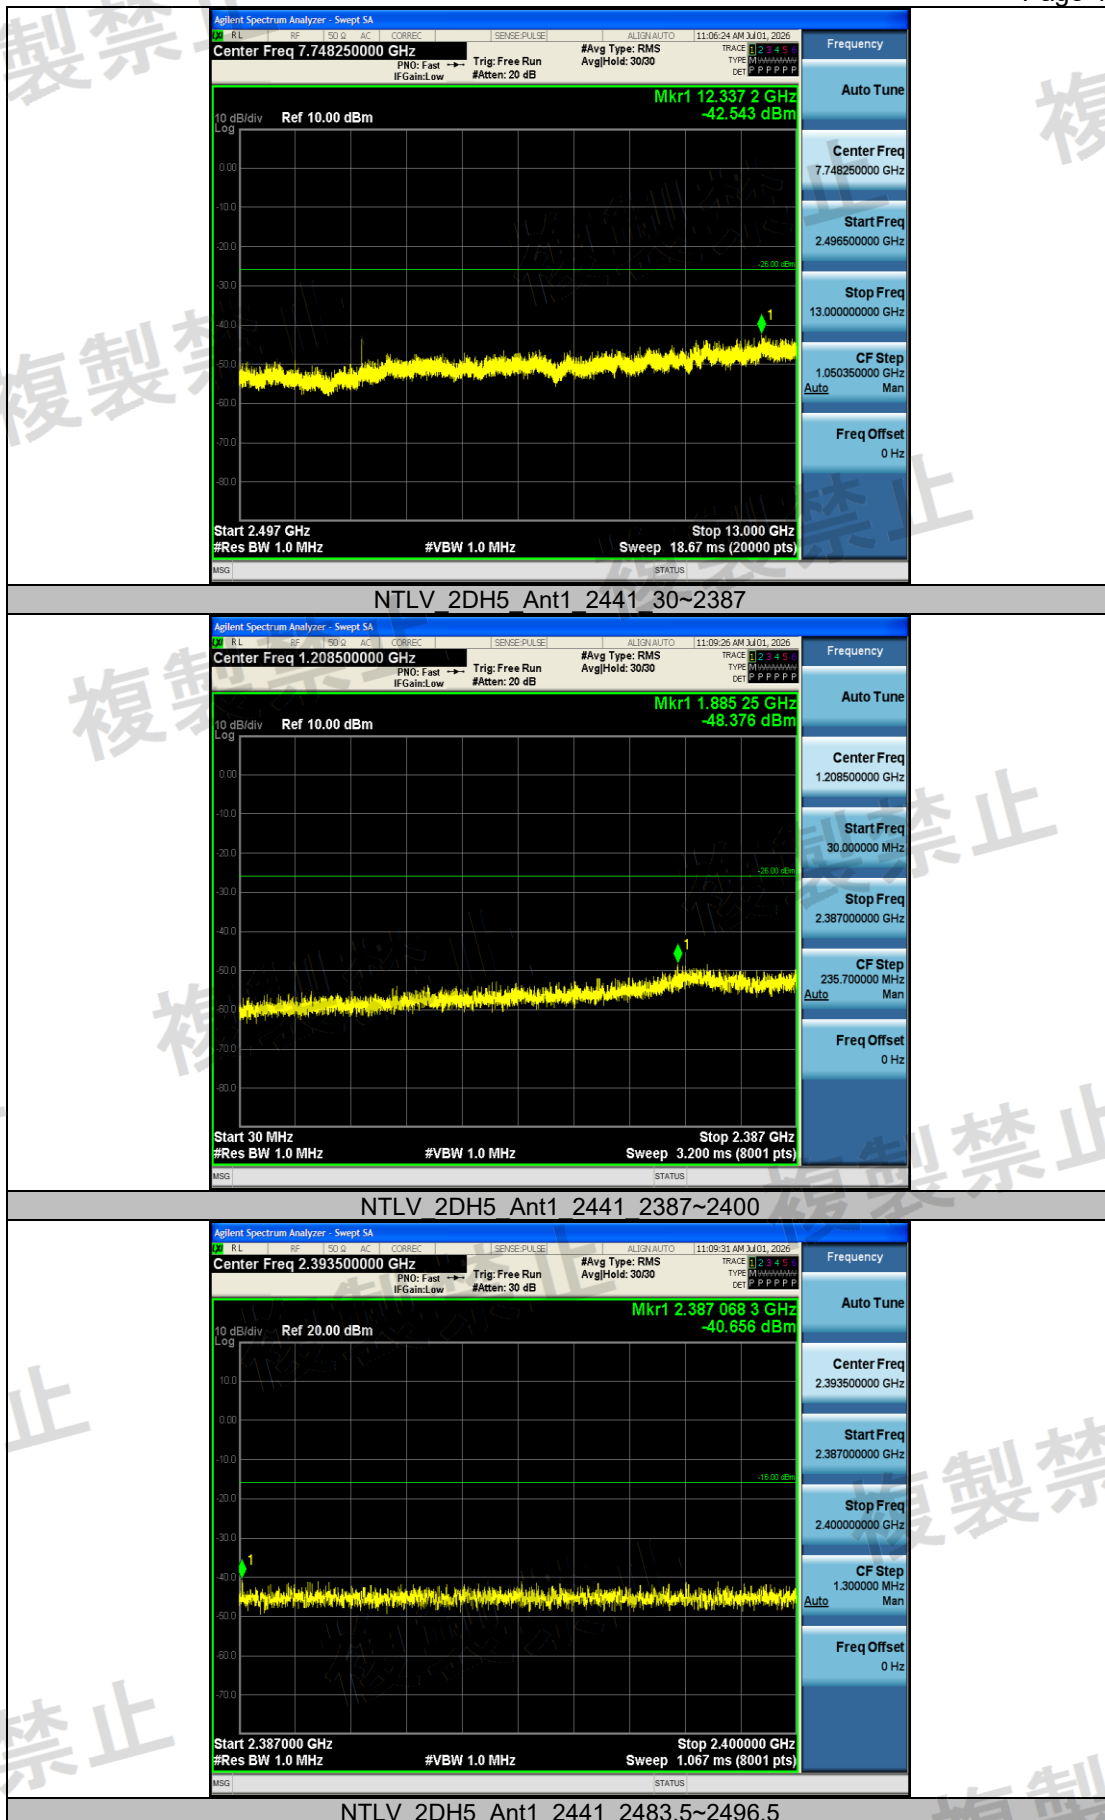


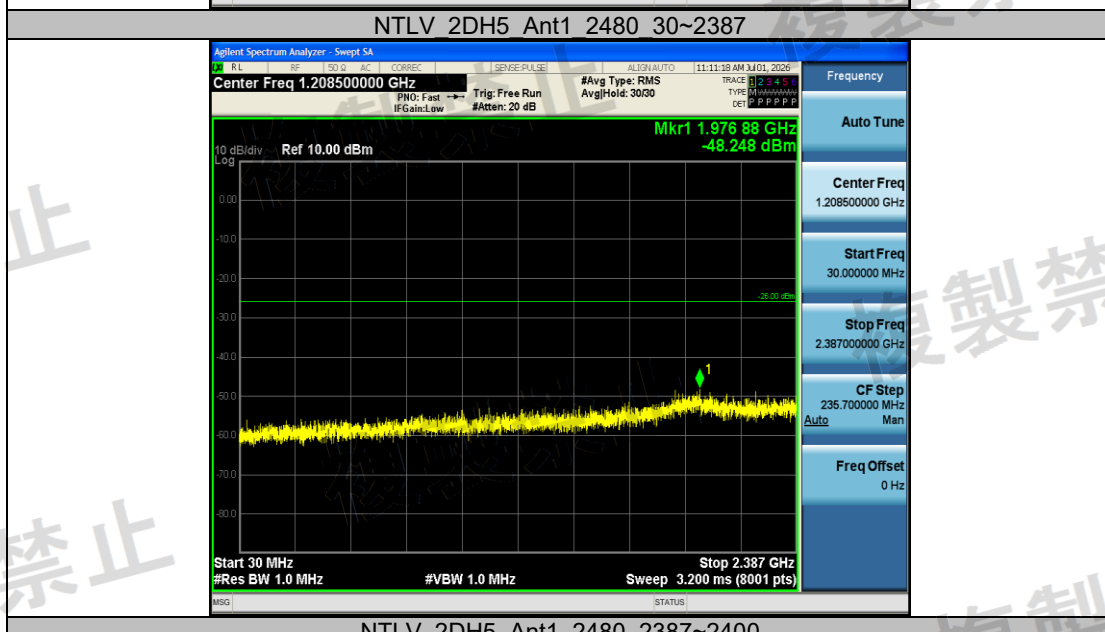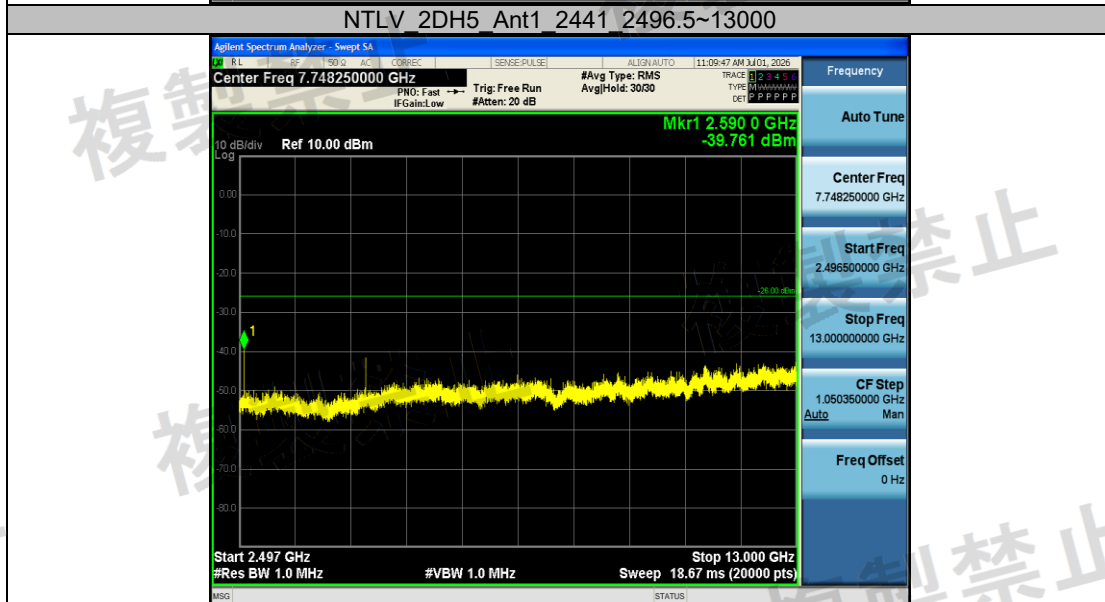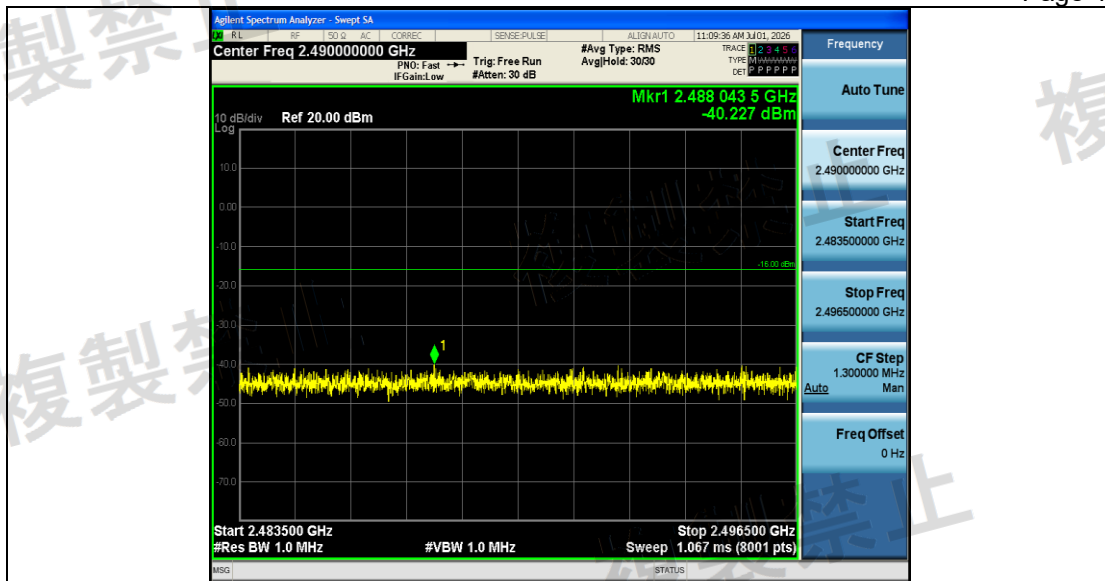

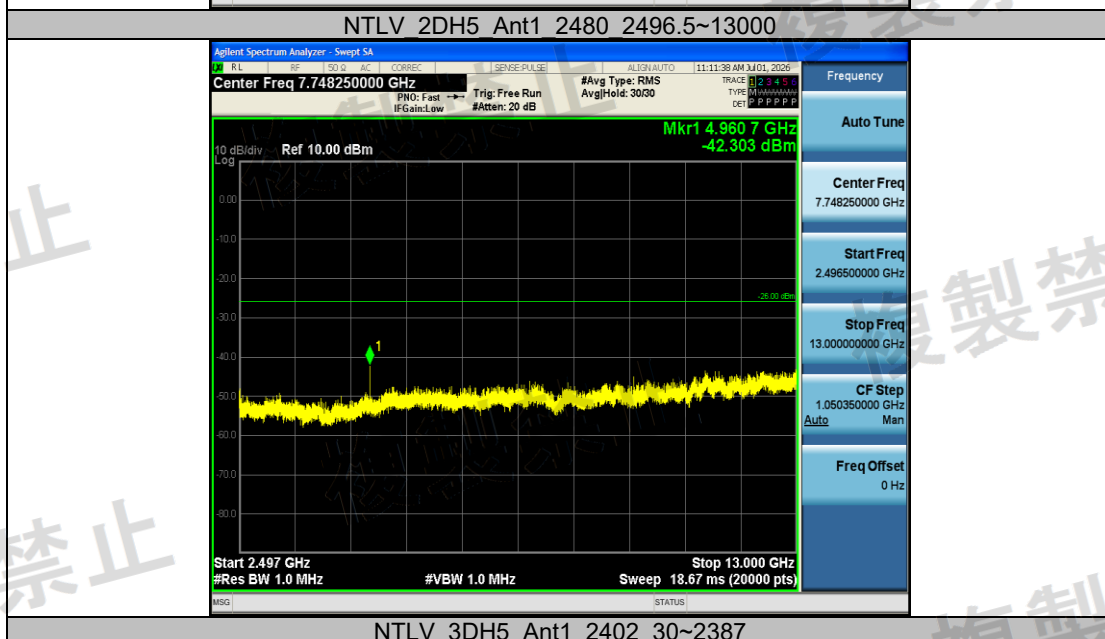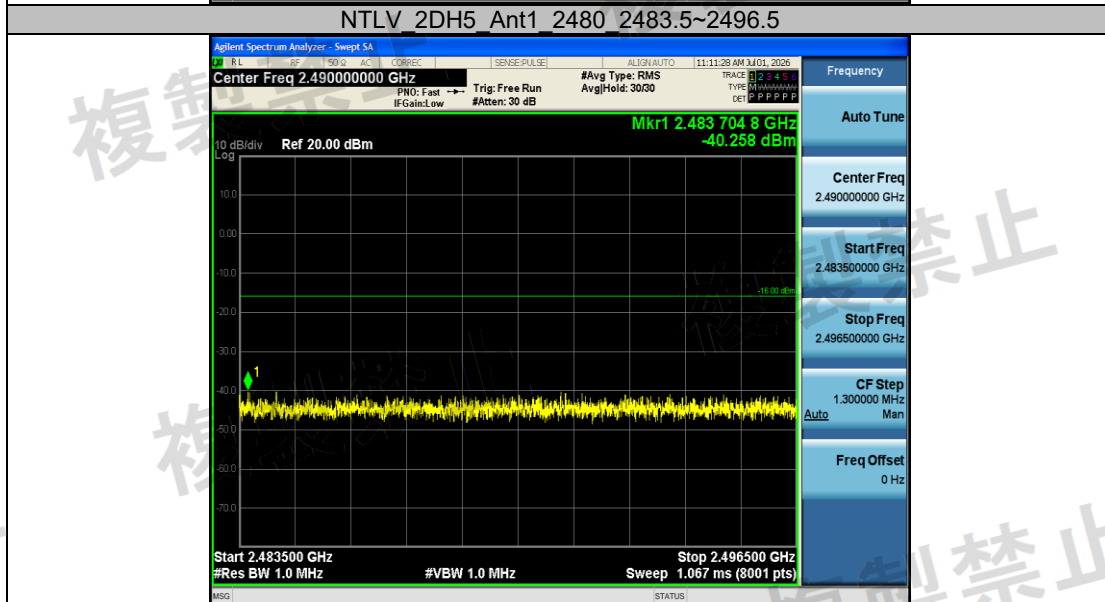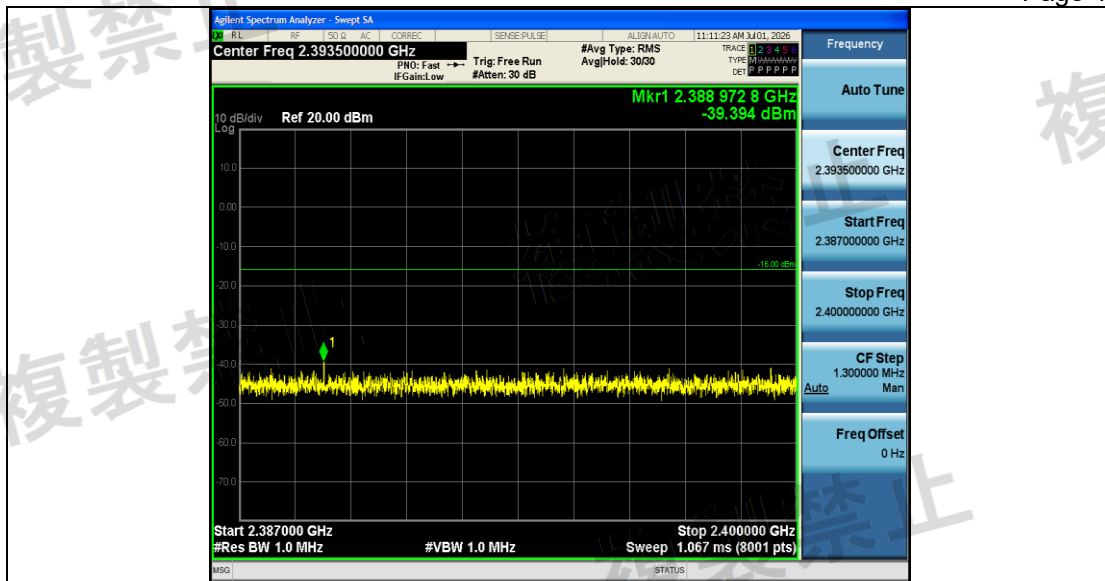


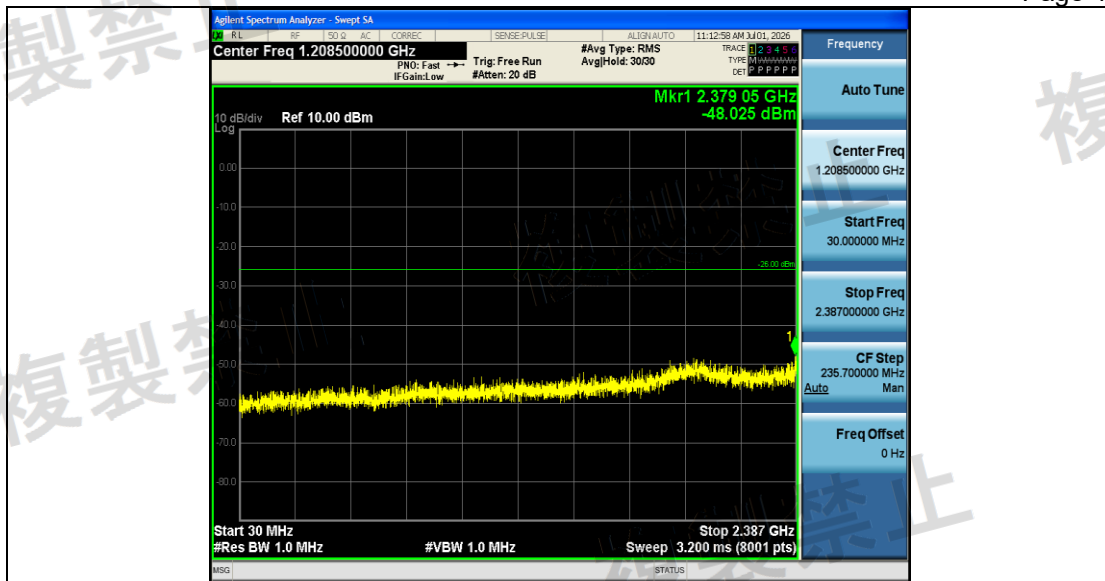

NTLV 3DH5 Ant1 2402 2387~2400

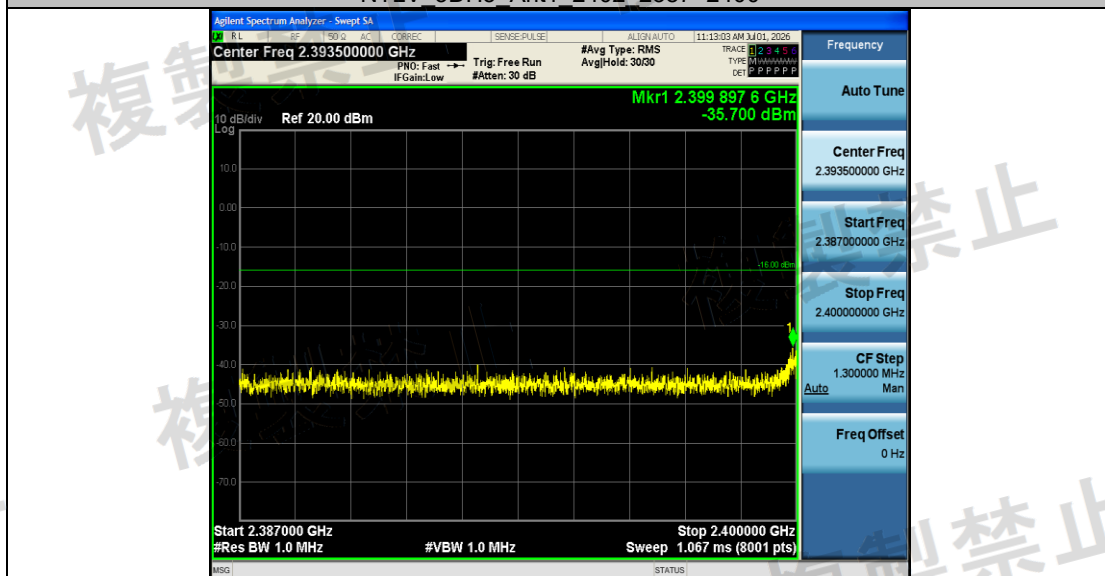



NTLV 3DH5 Ant1 2402 2483.5~2496.5

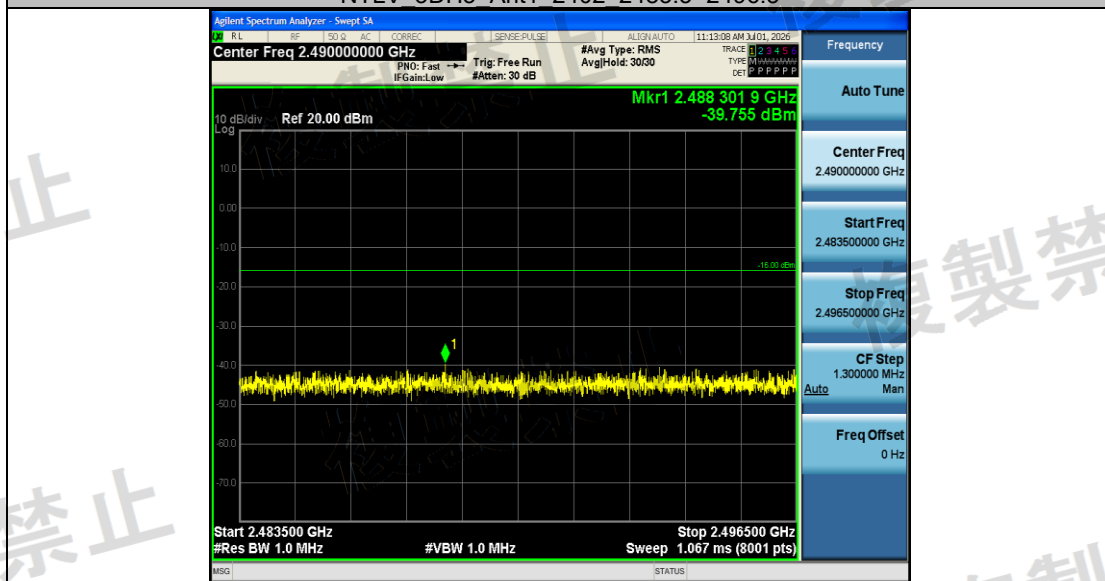


NTLV 3DH5 Ant1 2402 2496.5~13000



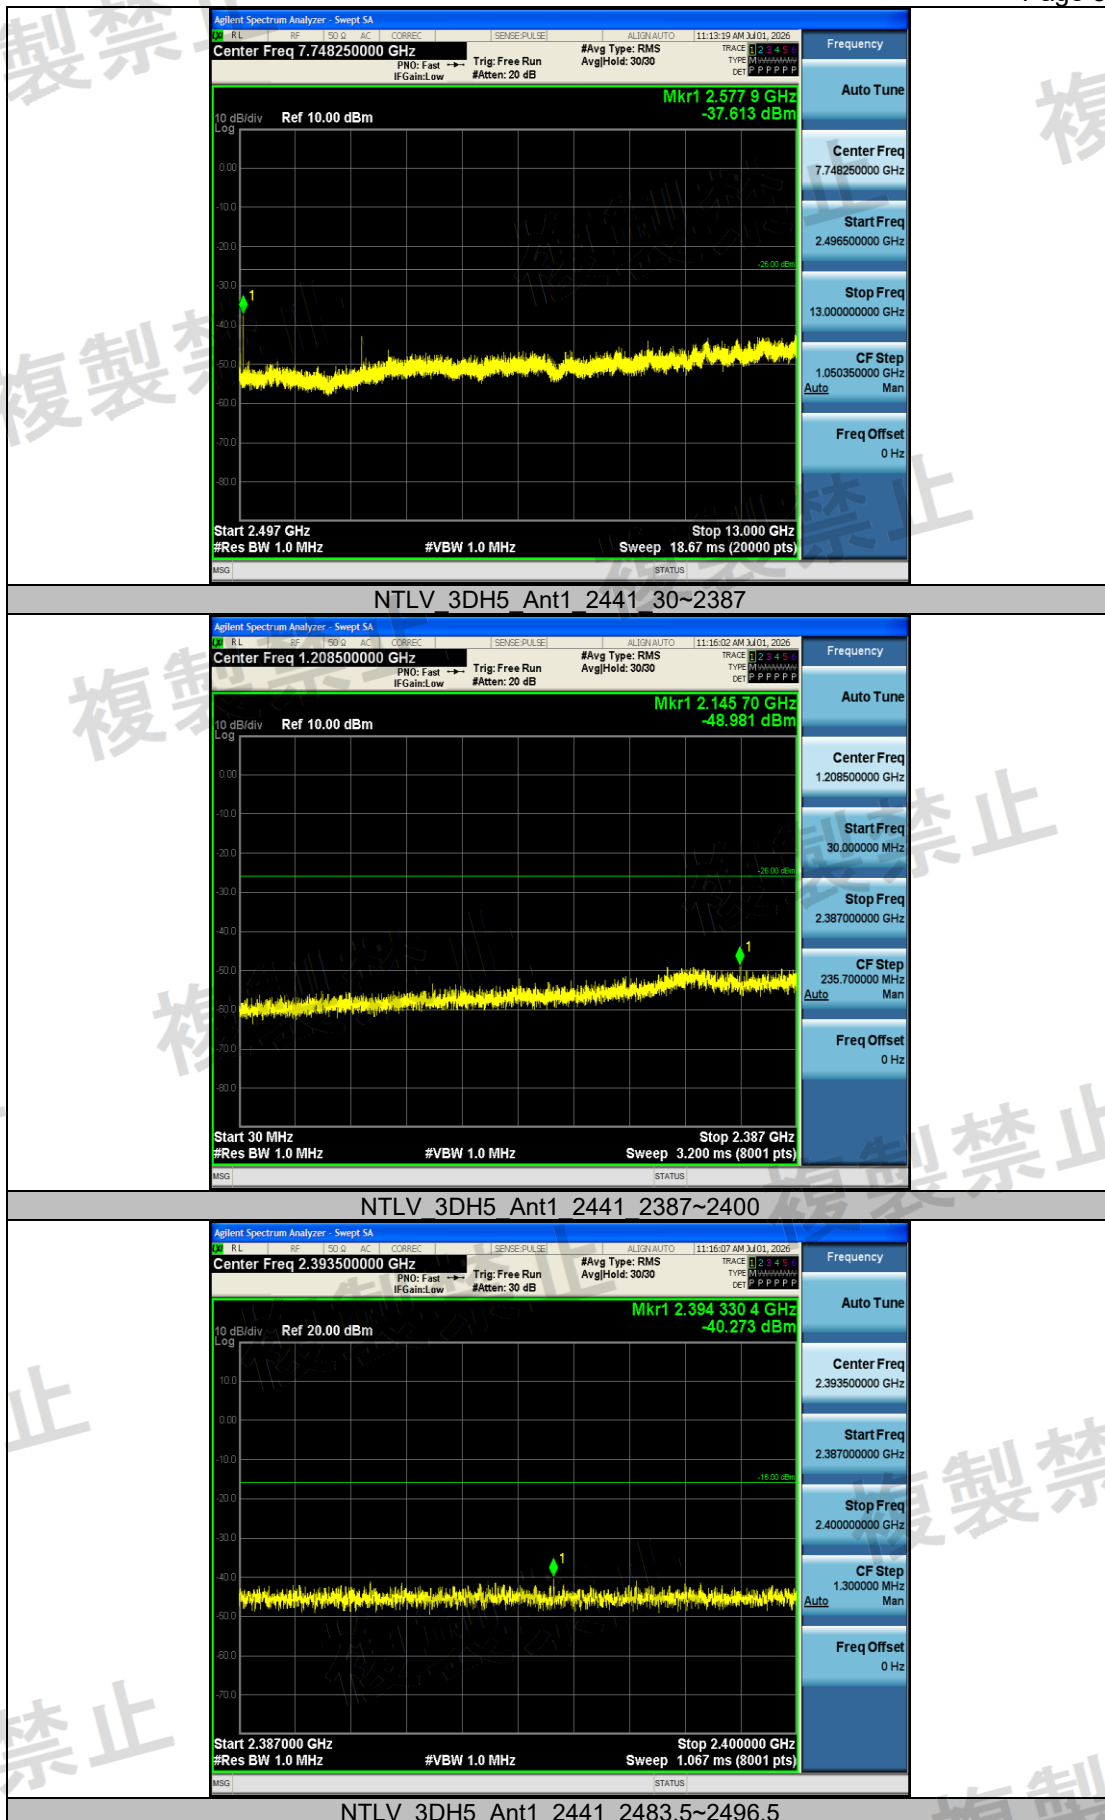


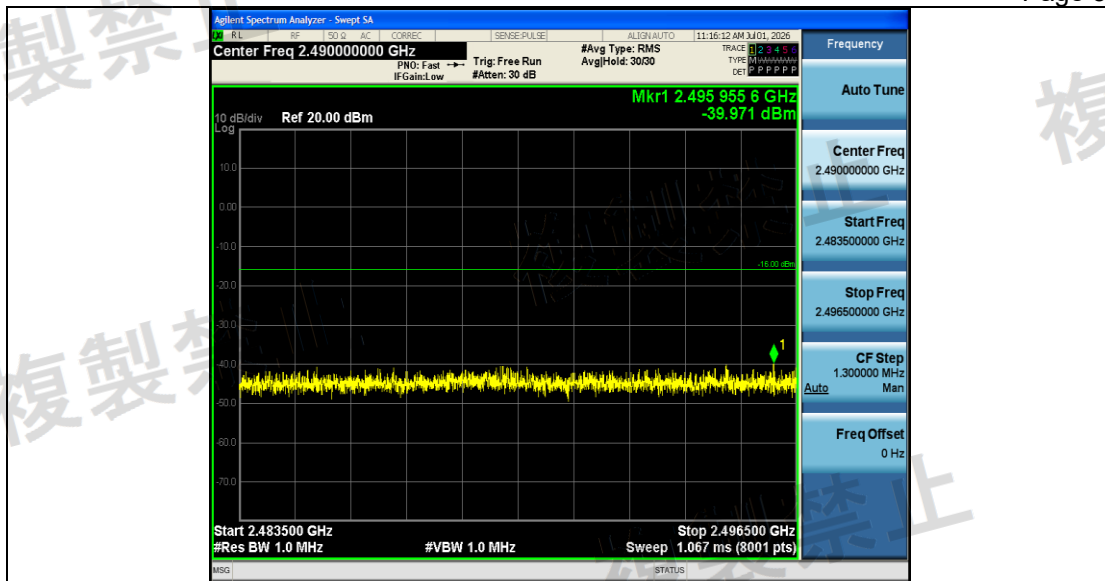

NTLV 3DH5 Ant1 2441 2496.5~13000

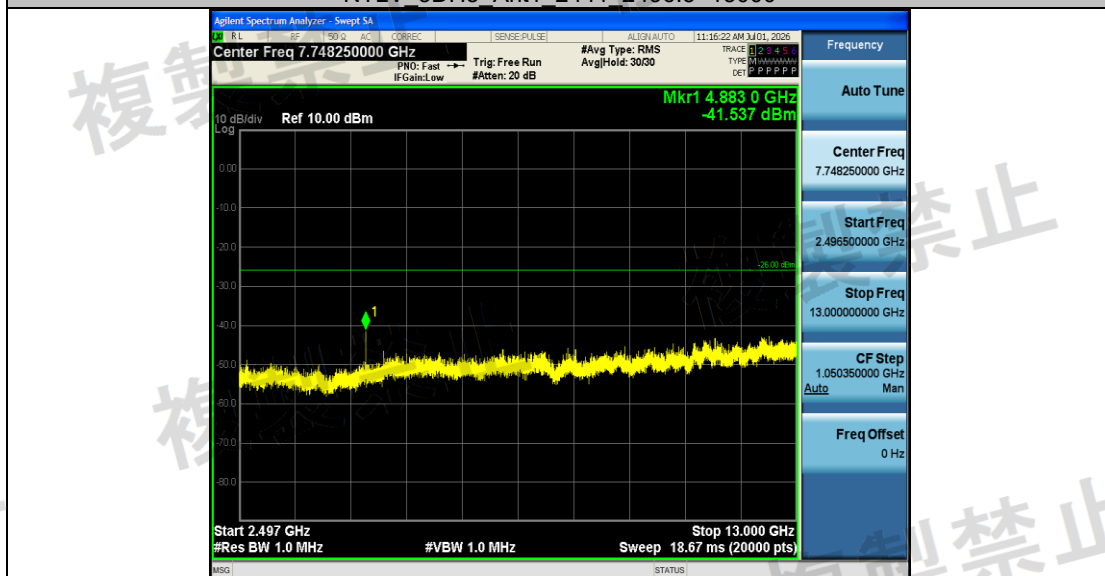



NTLV 3DH5 Ant1 2480 30~2387

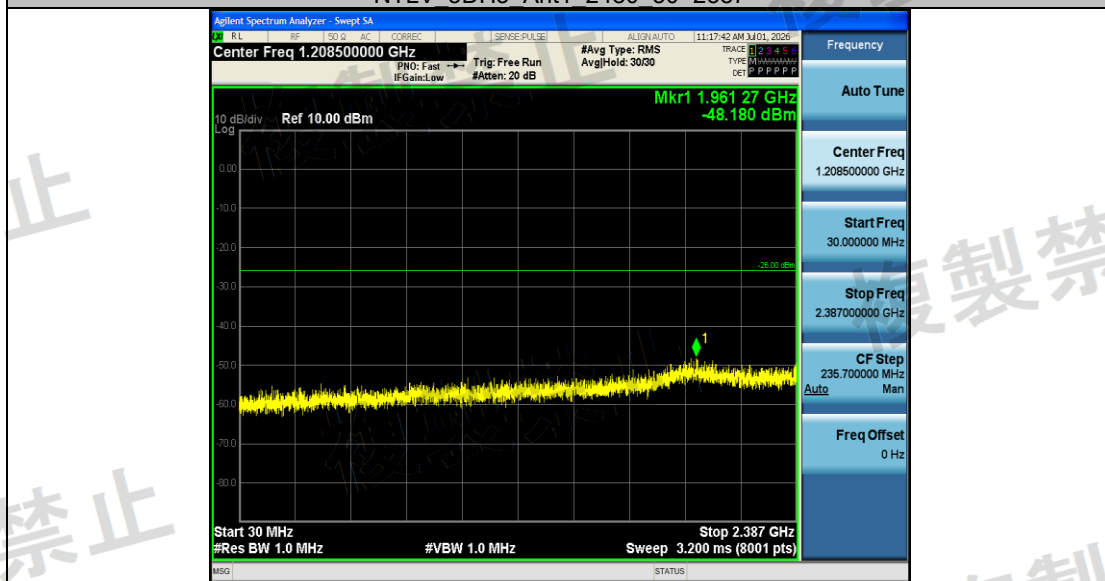



NTLV 3DH5 Ant1 2480 2387~2400




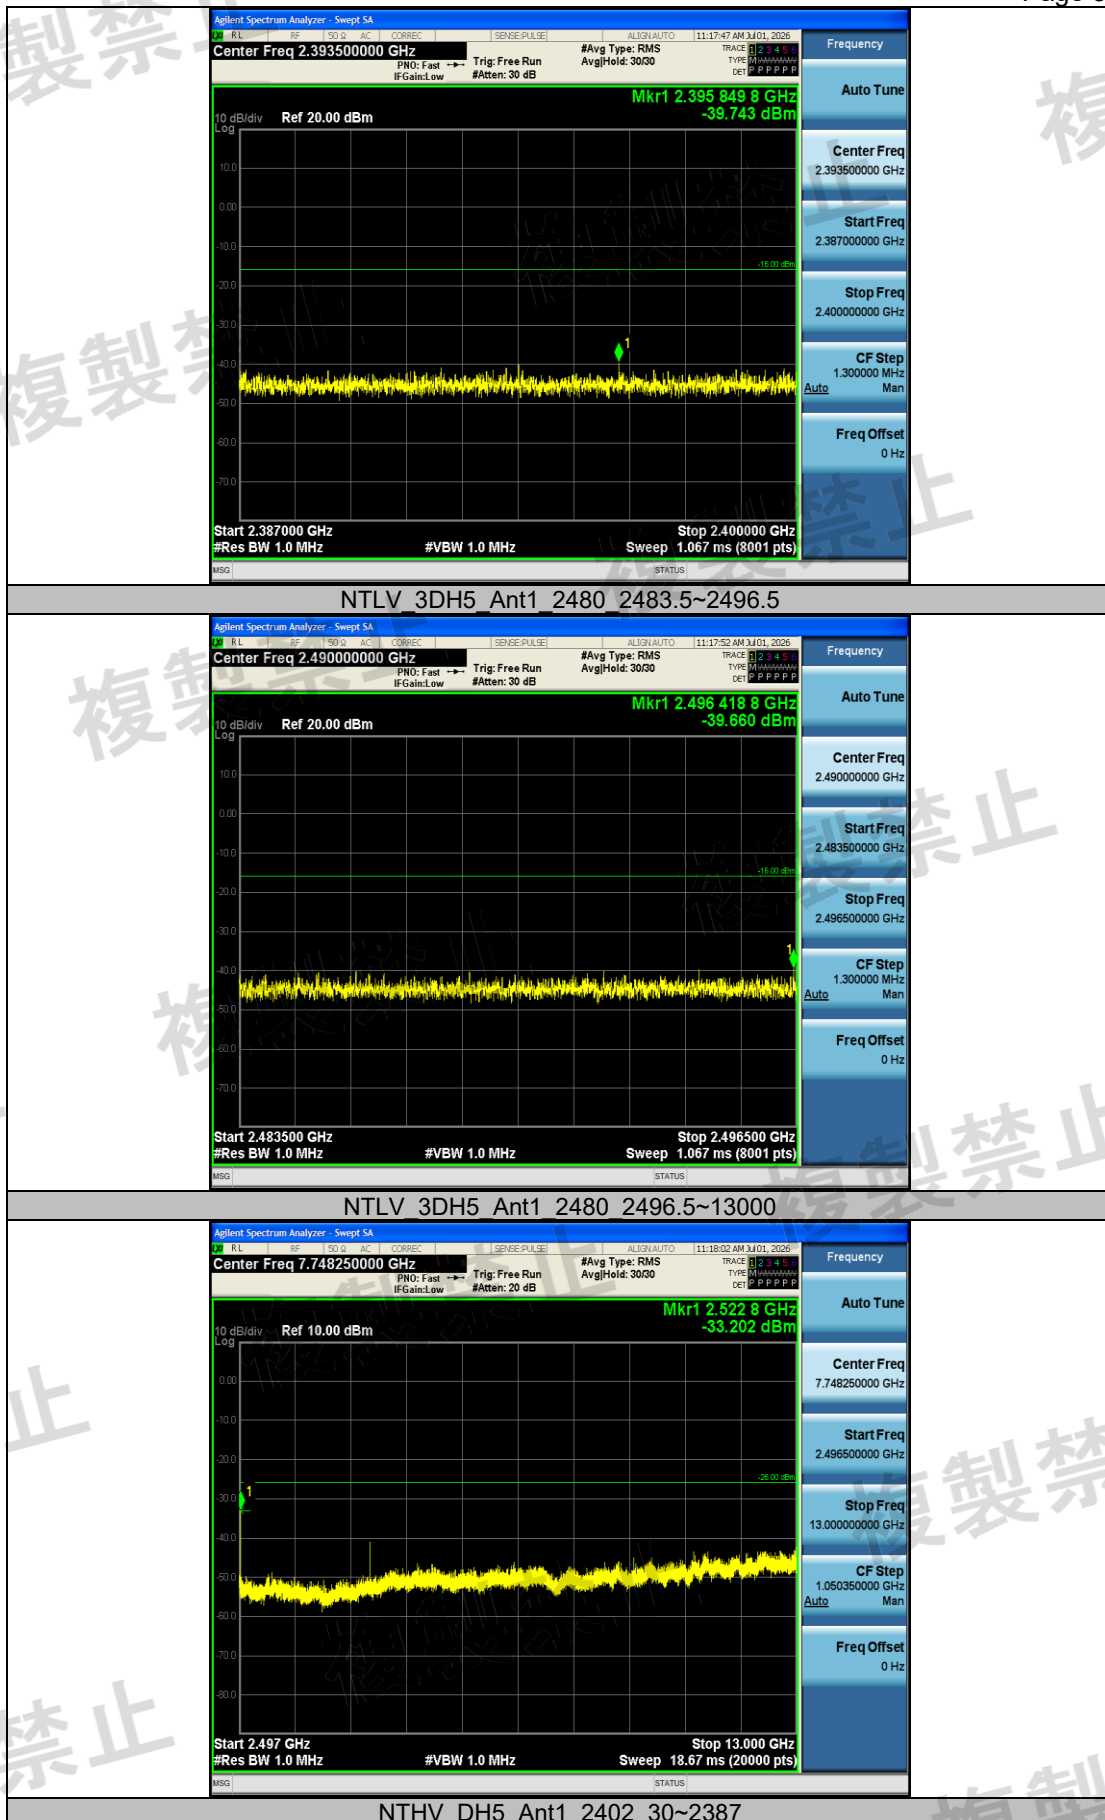


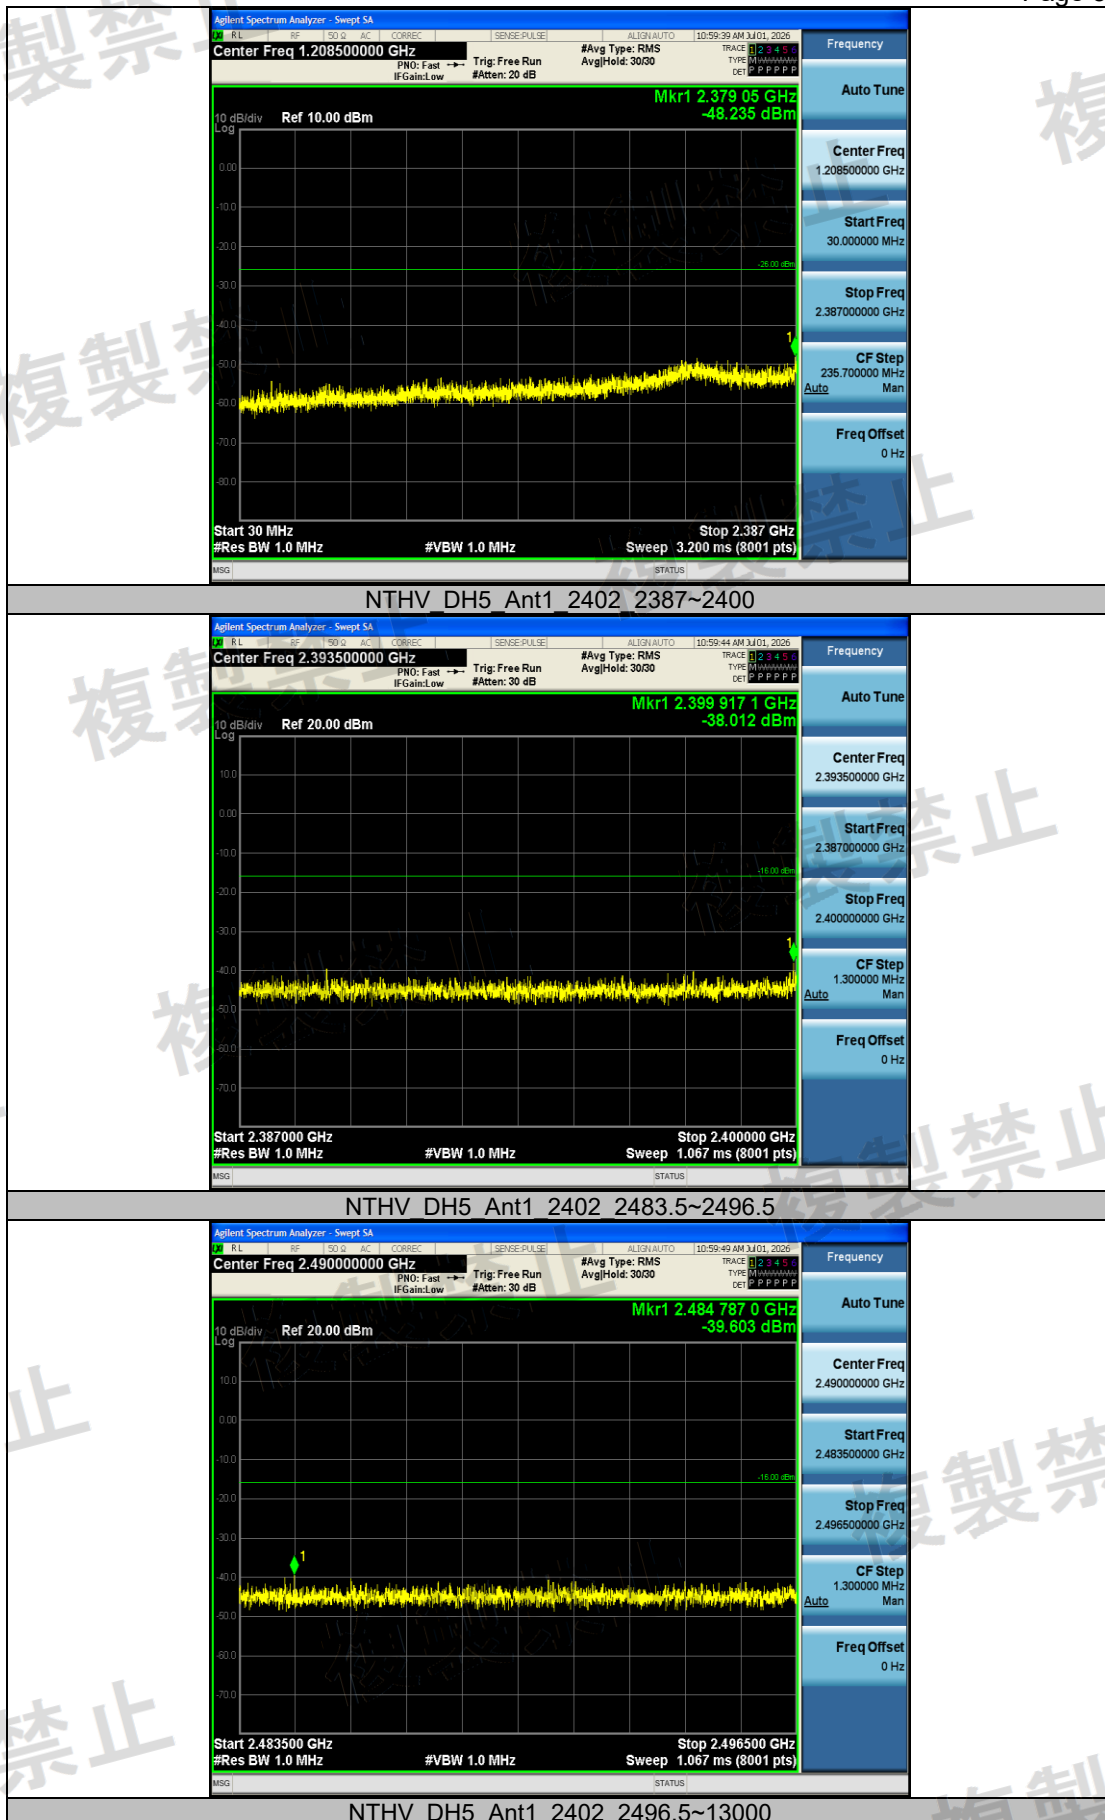

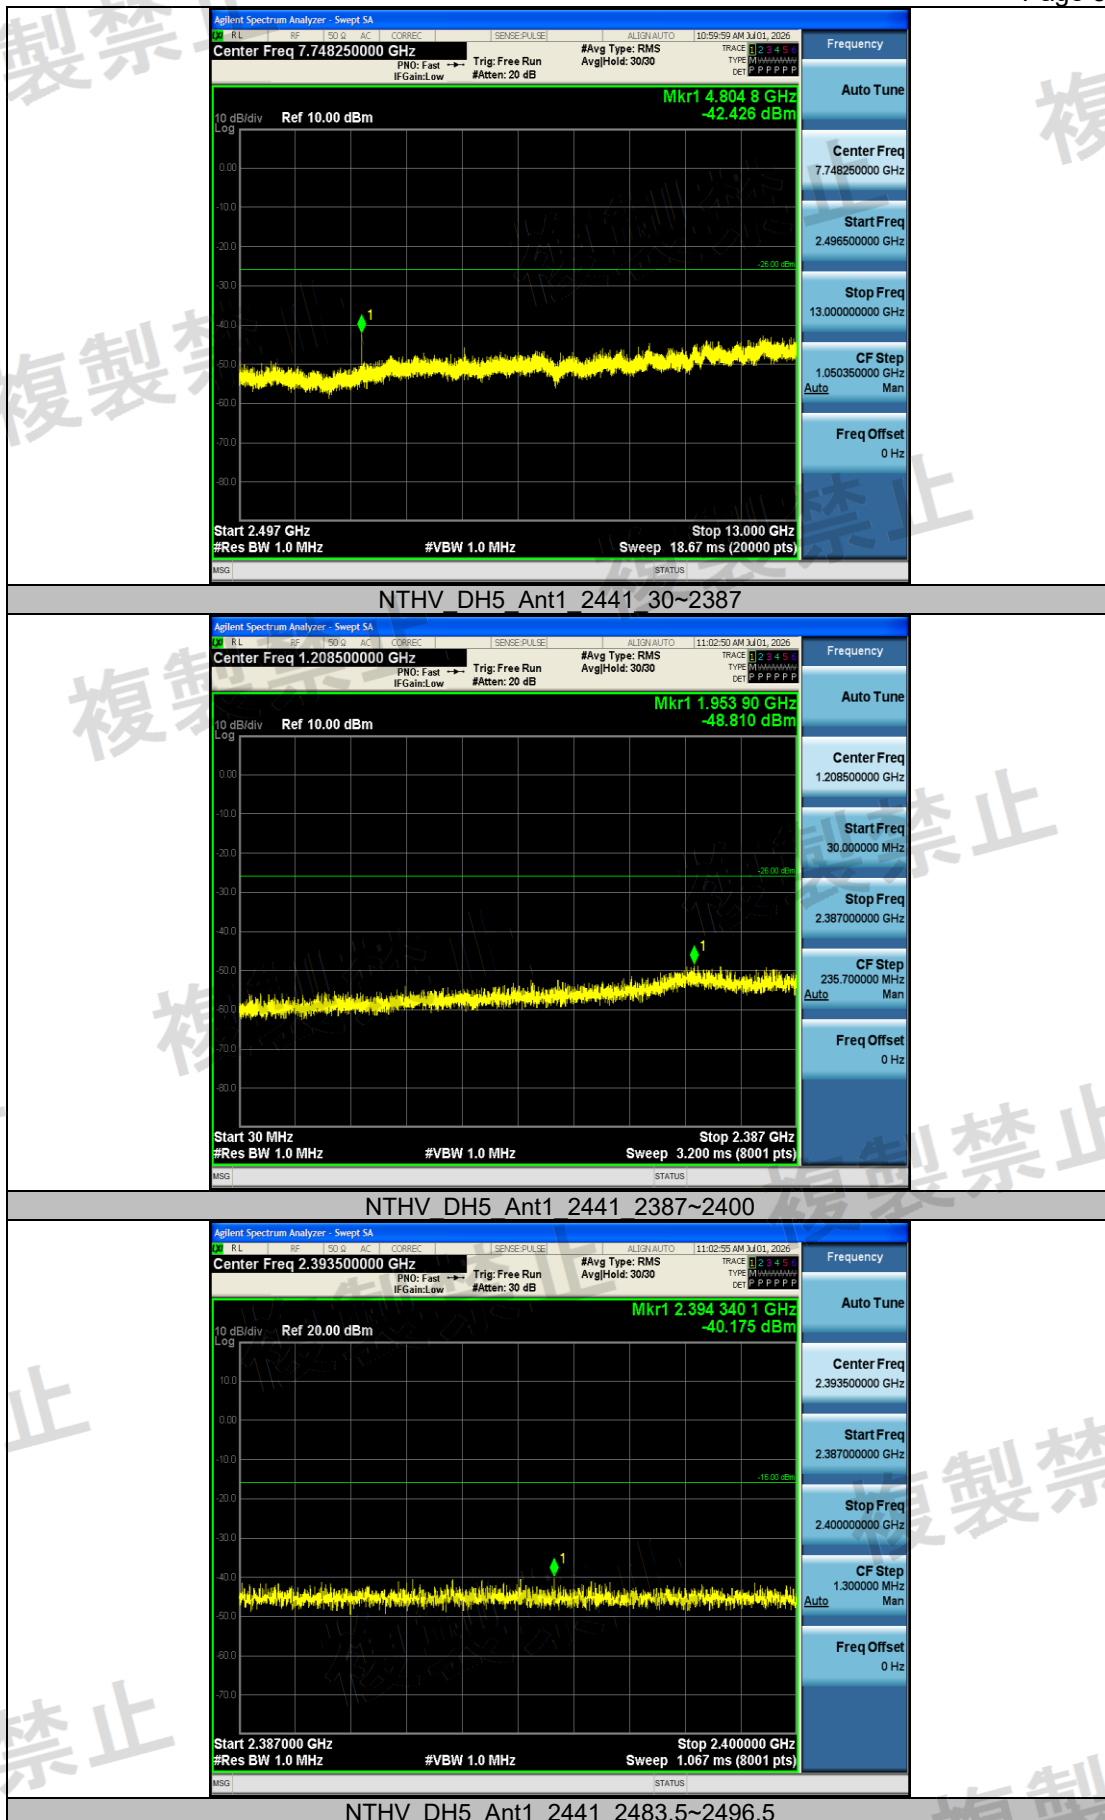


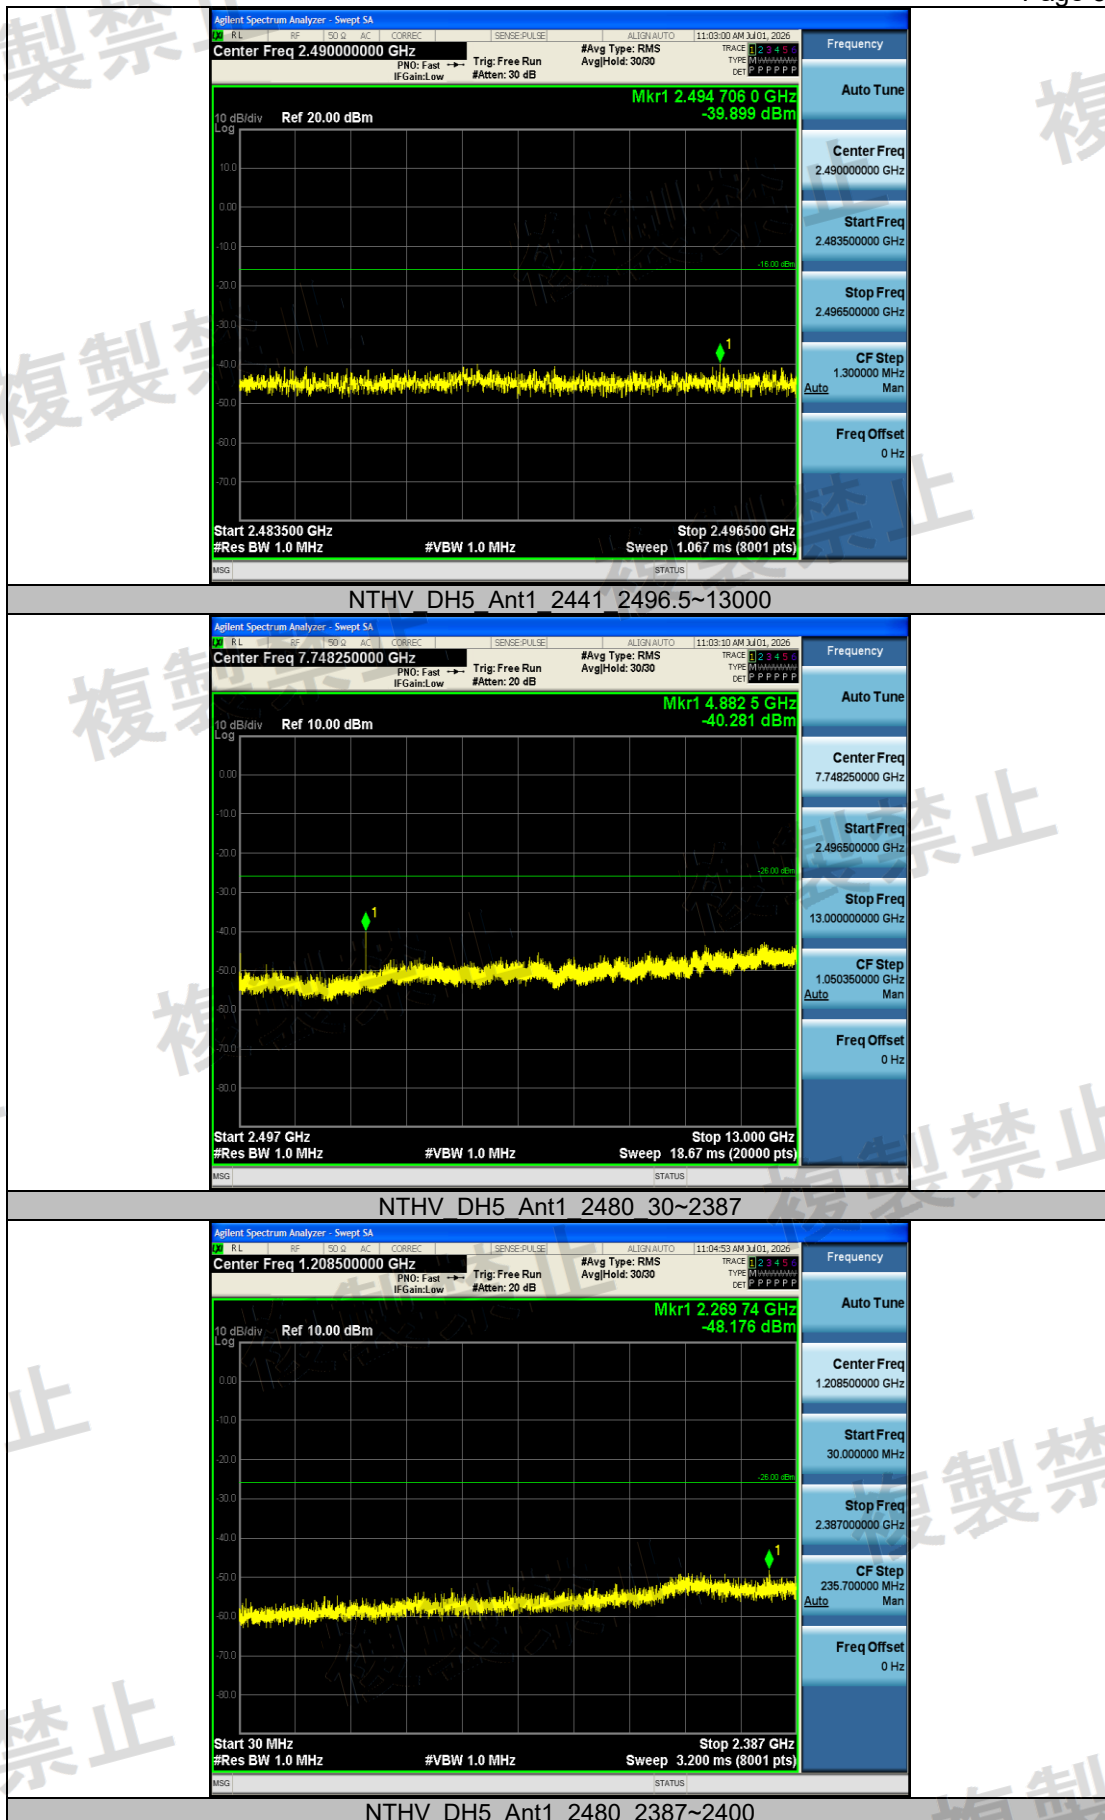

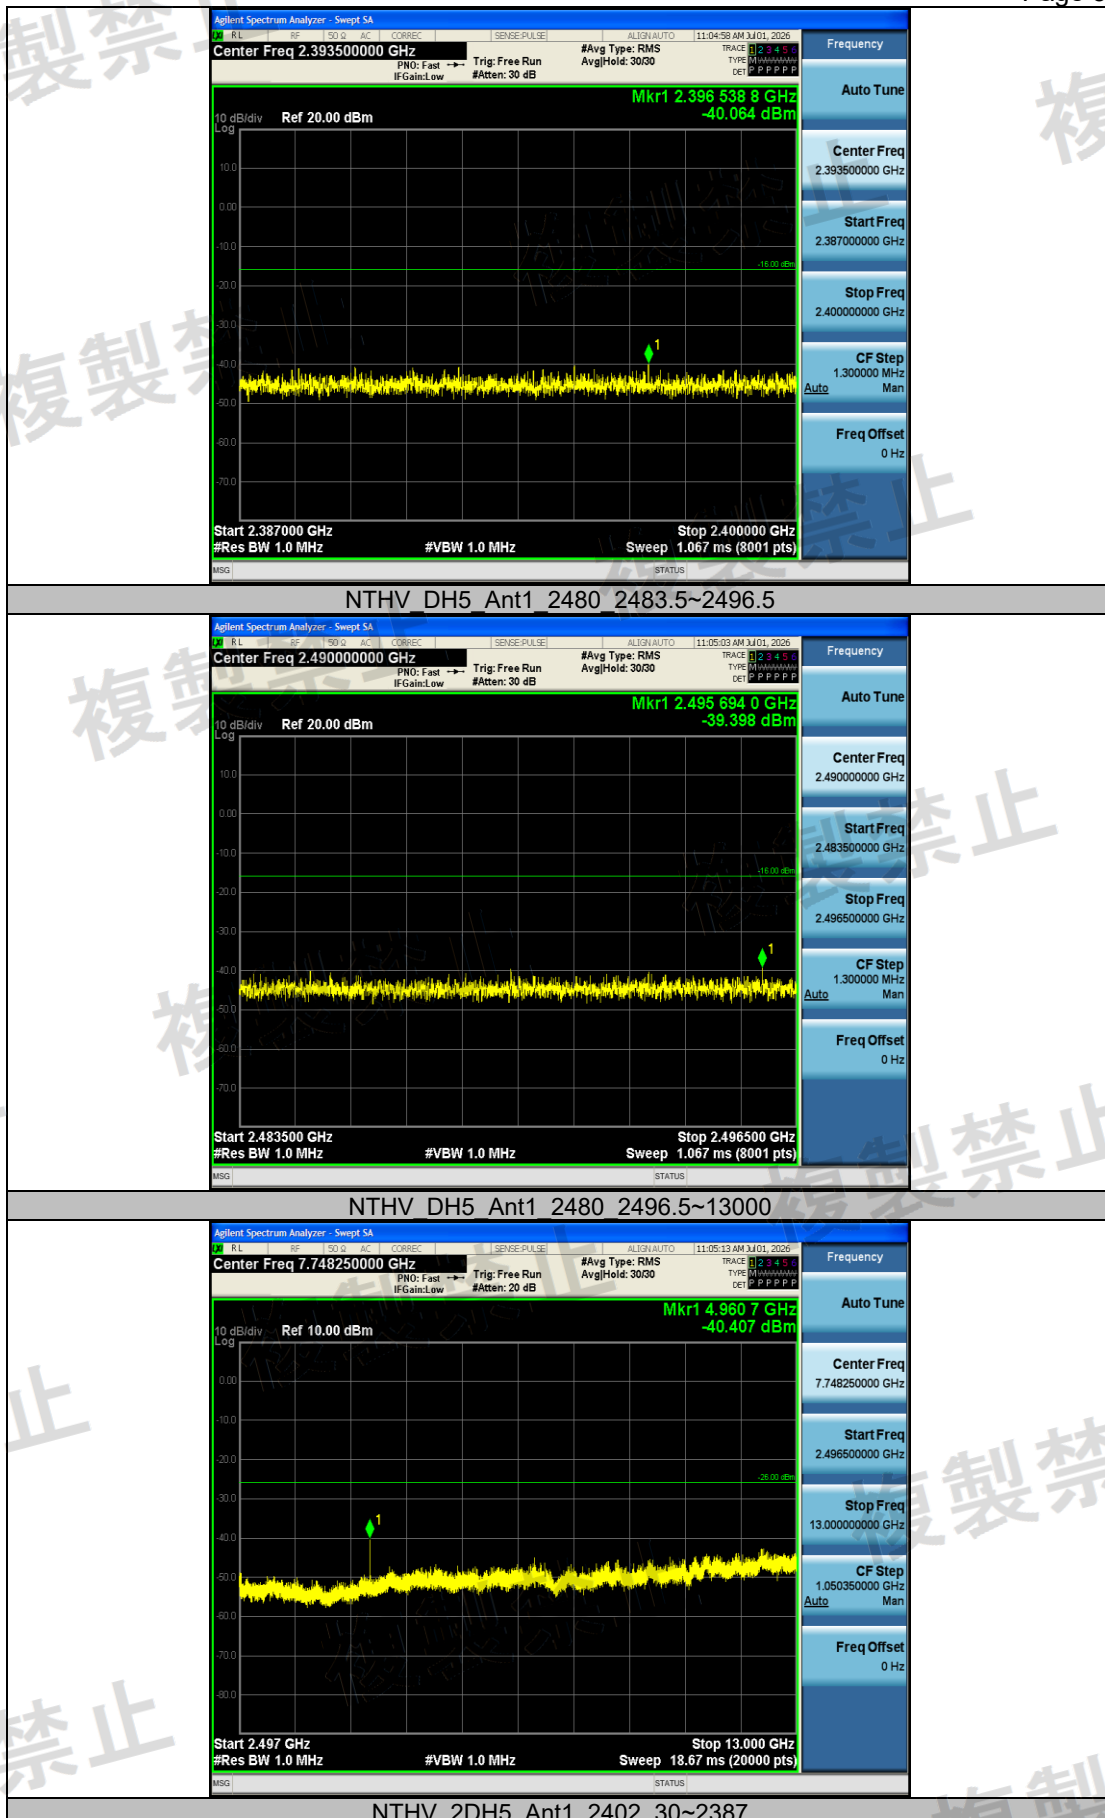


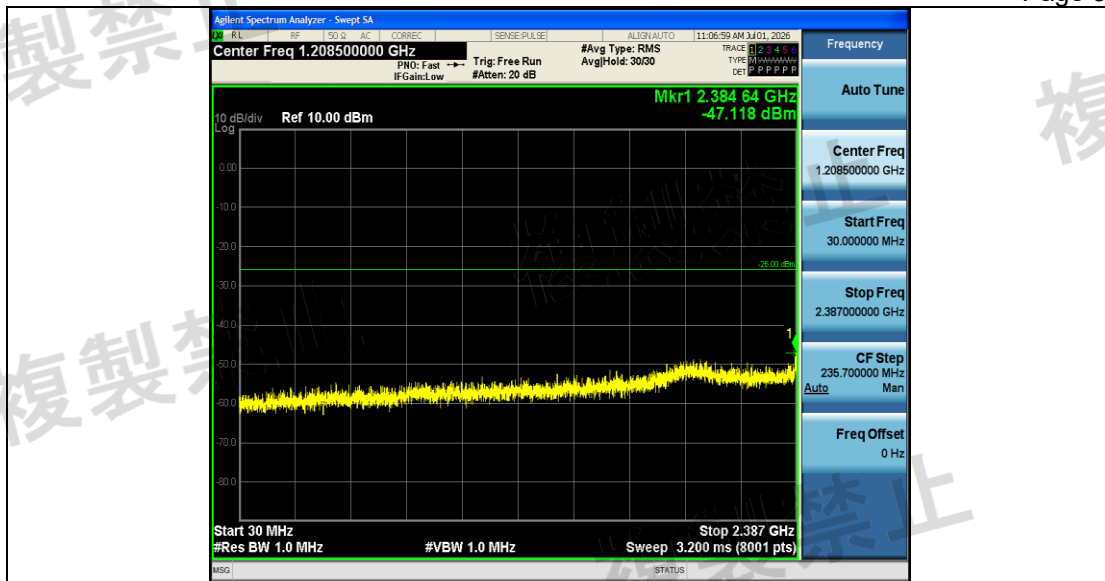

NTHV 2DH5 Ant1 2402 2387~2400

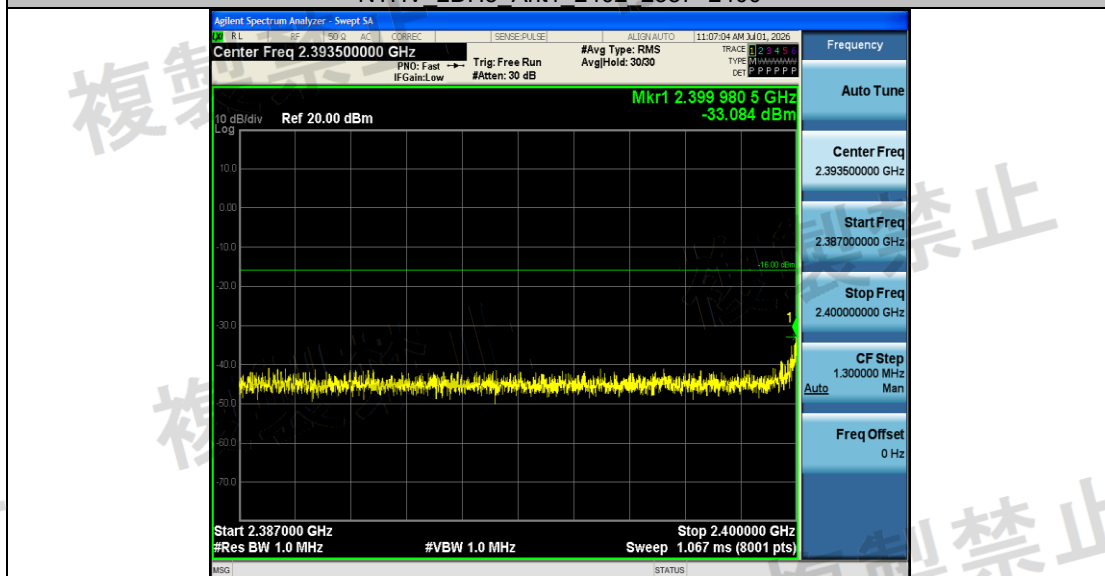



NTHV 2DH5 Ant1 2402 2483.5~2496.5

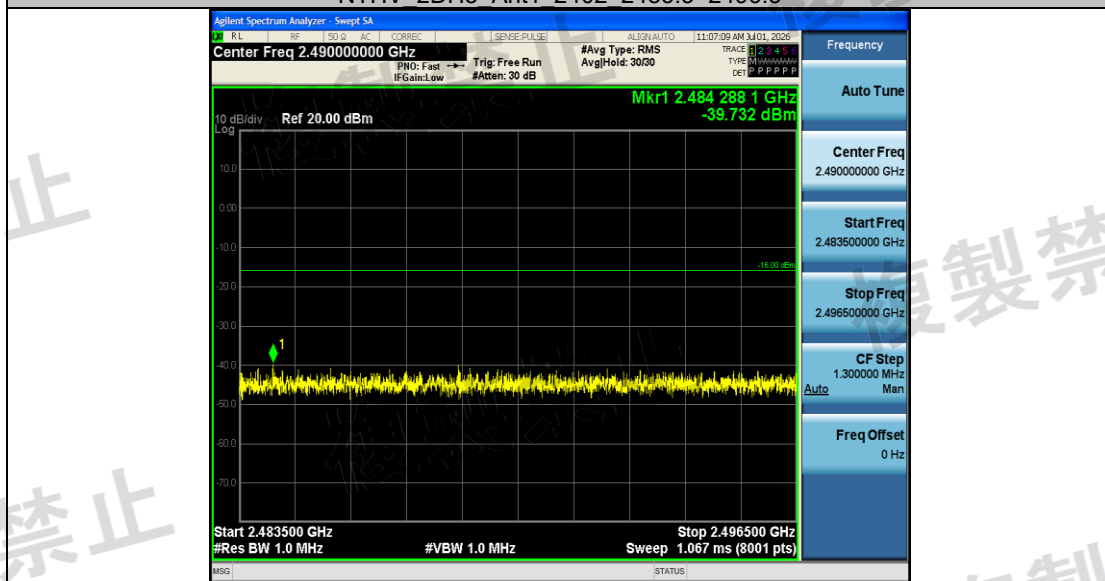



NTHV 2DH5 Ant1 2402 2496.5~13000



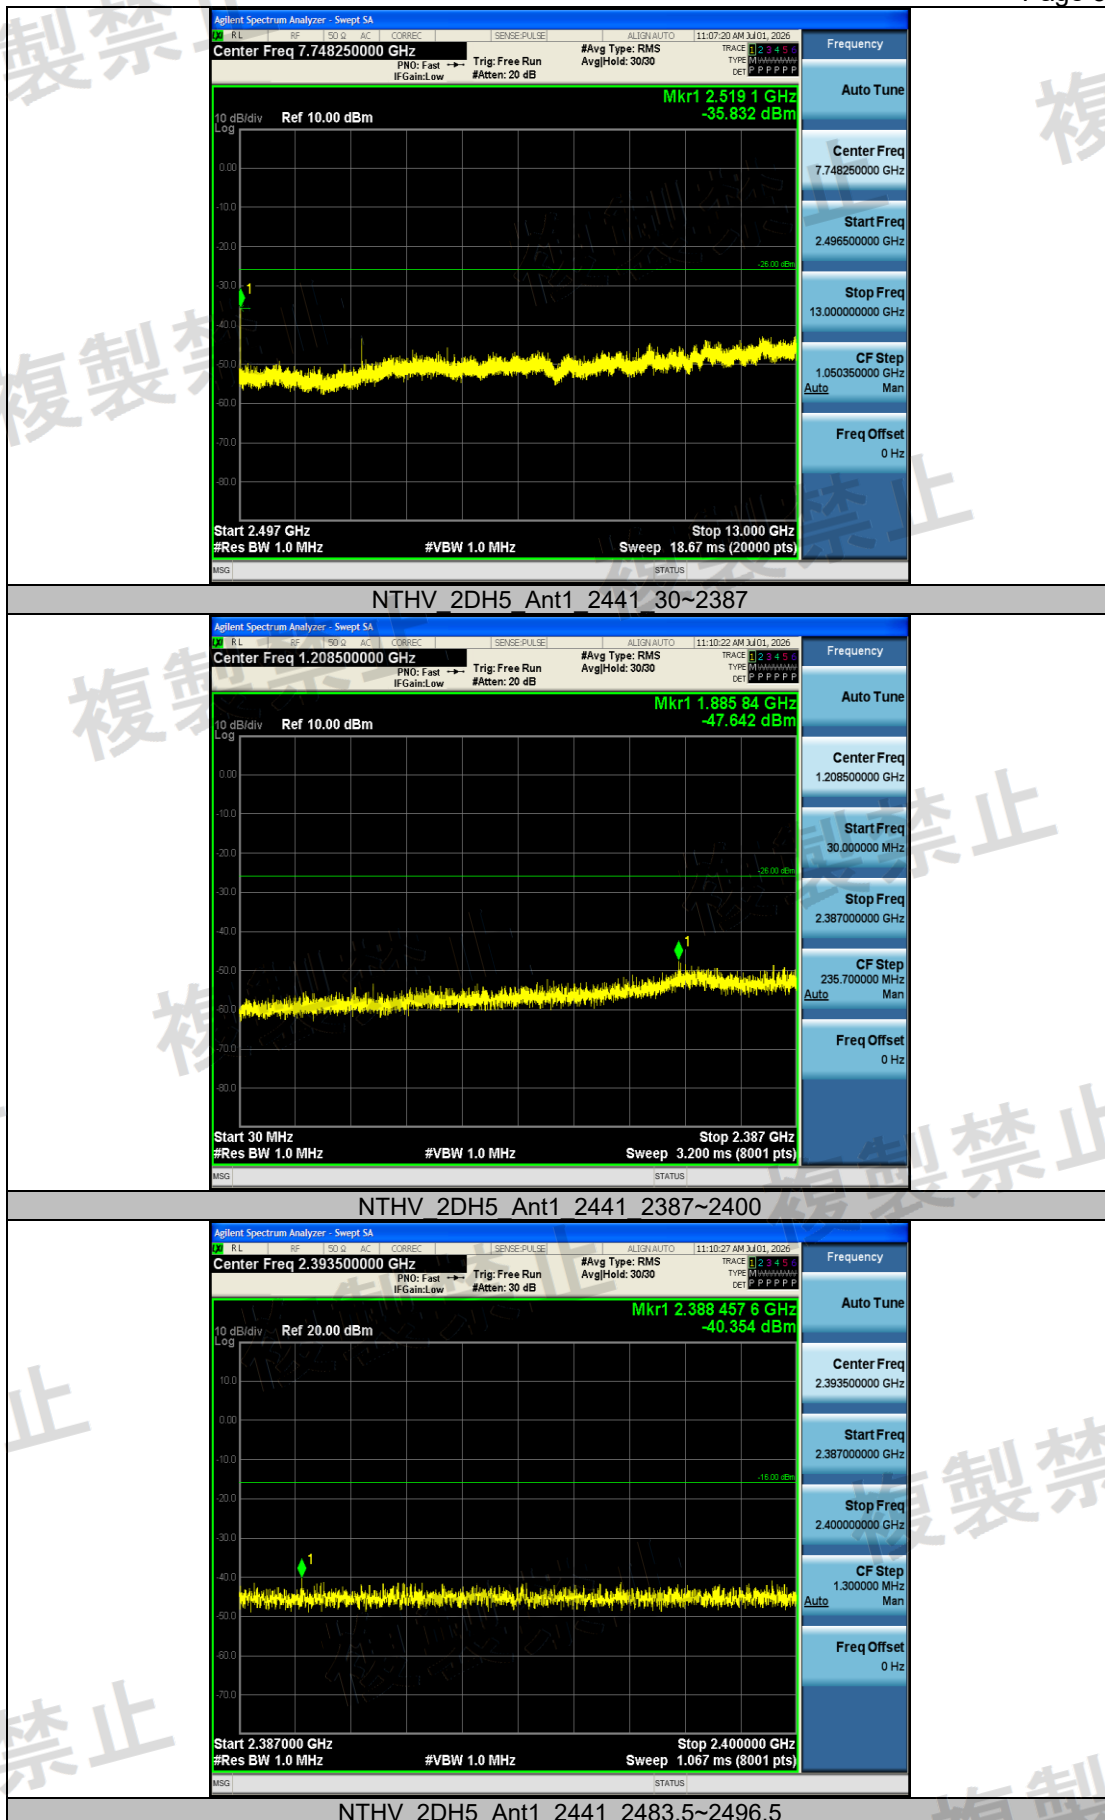


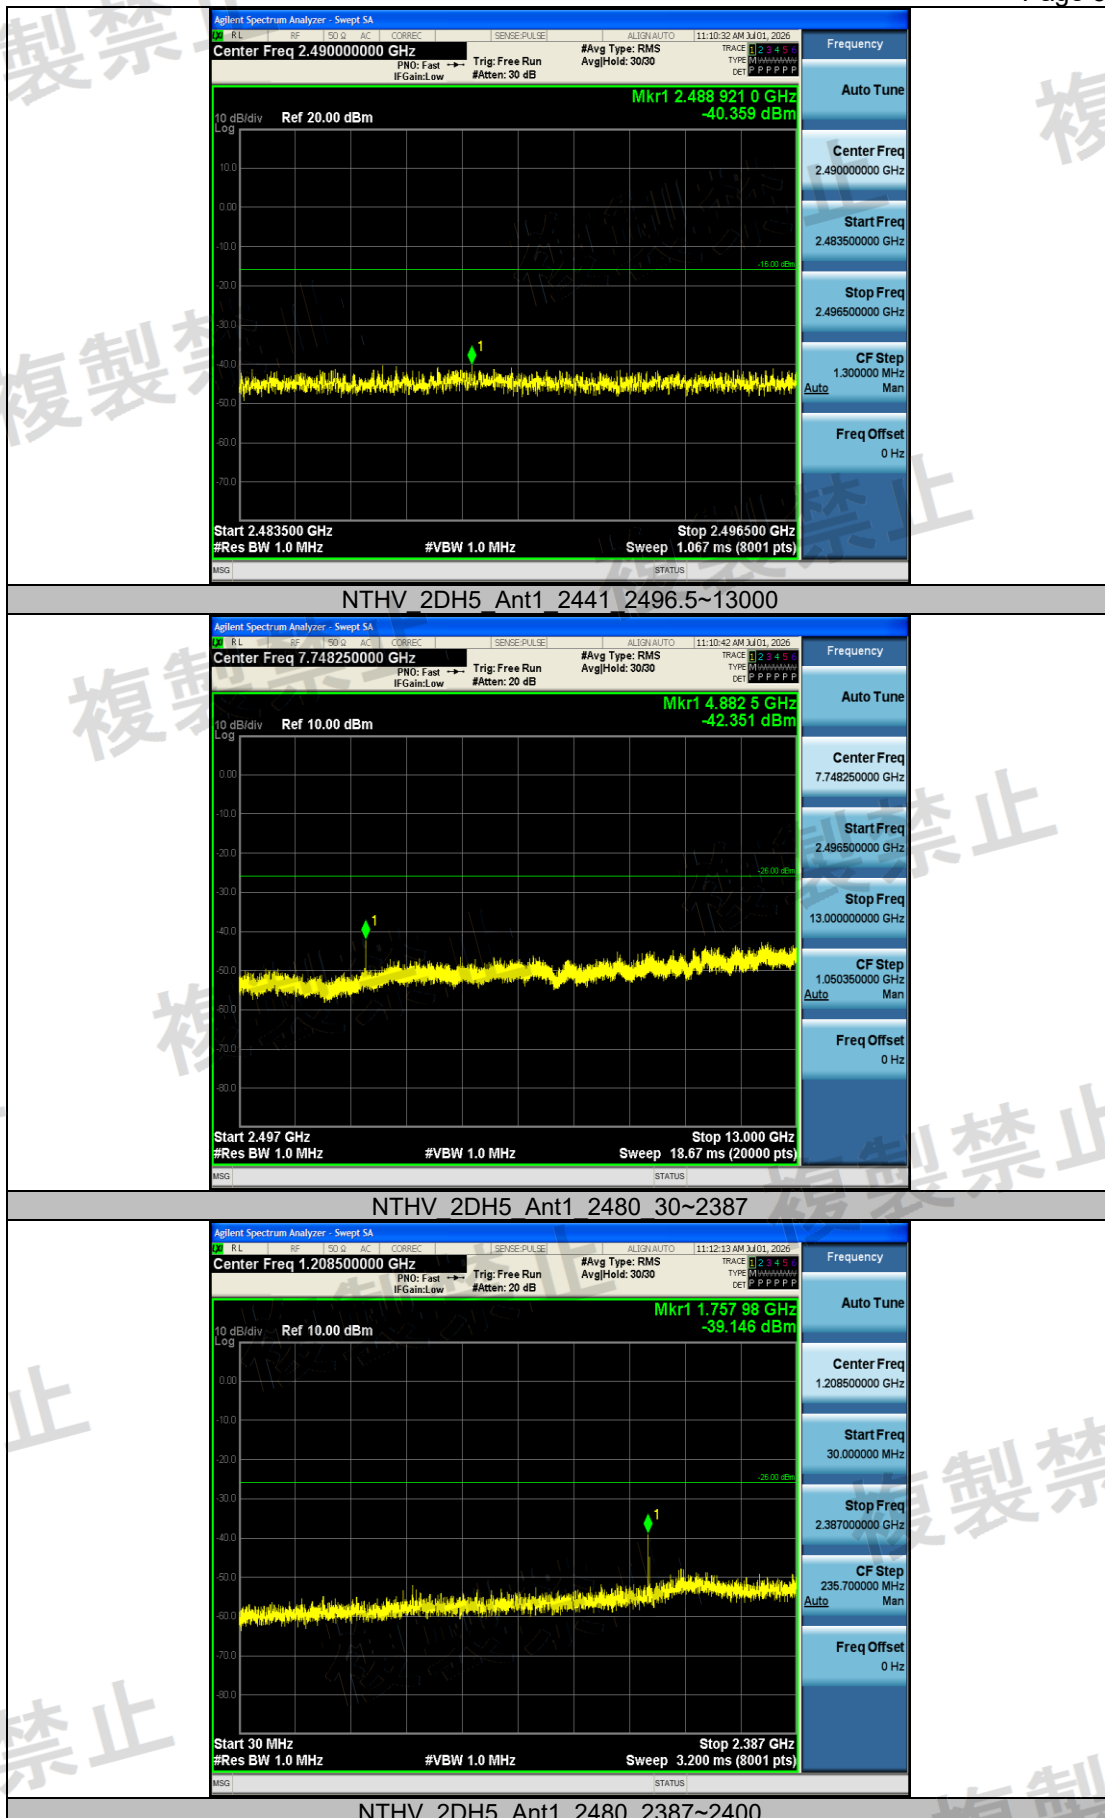

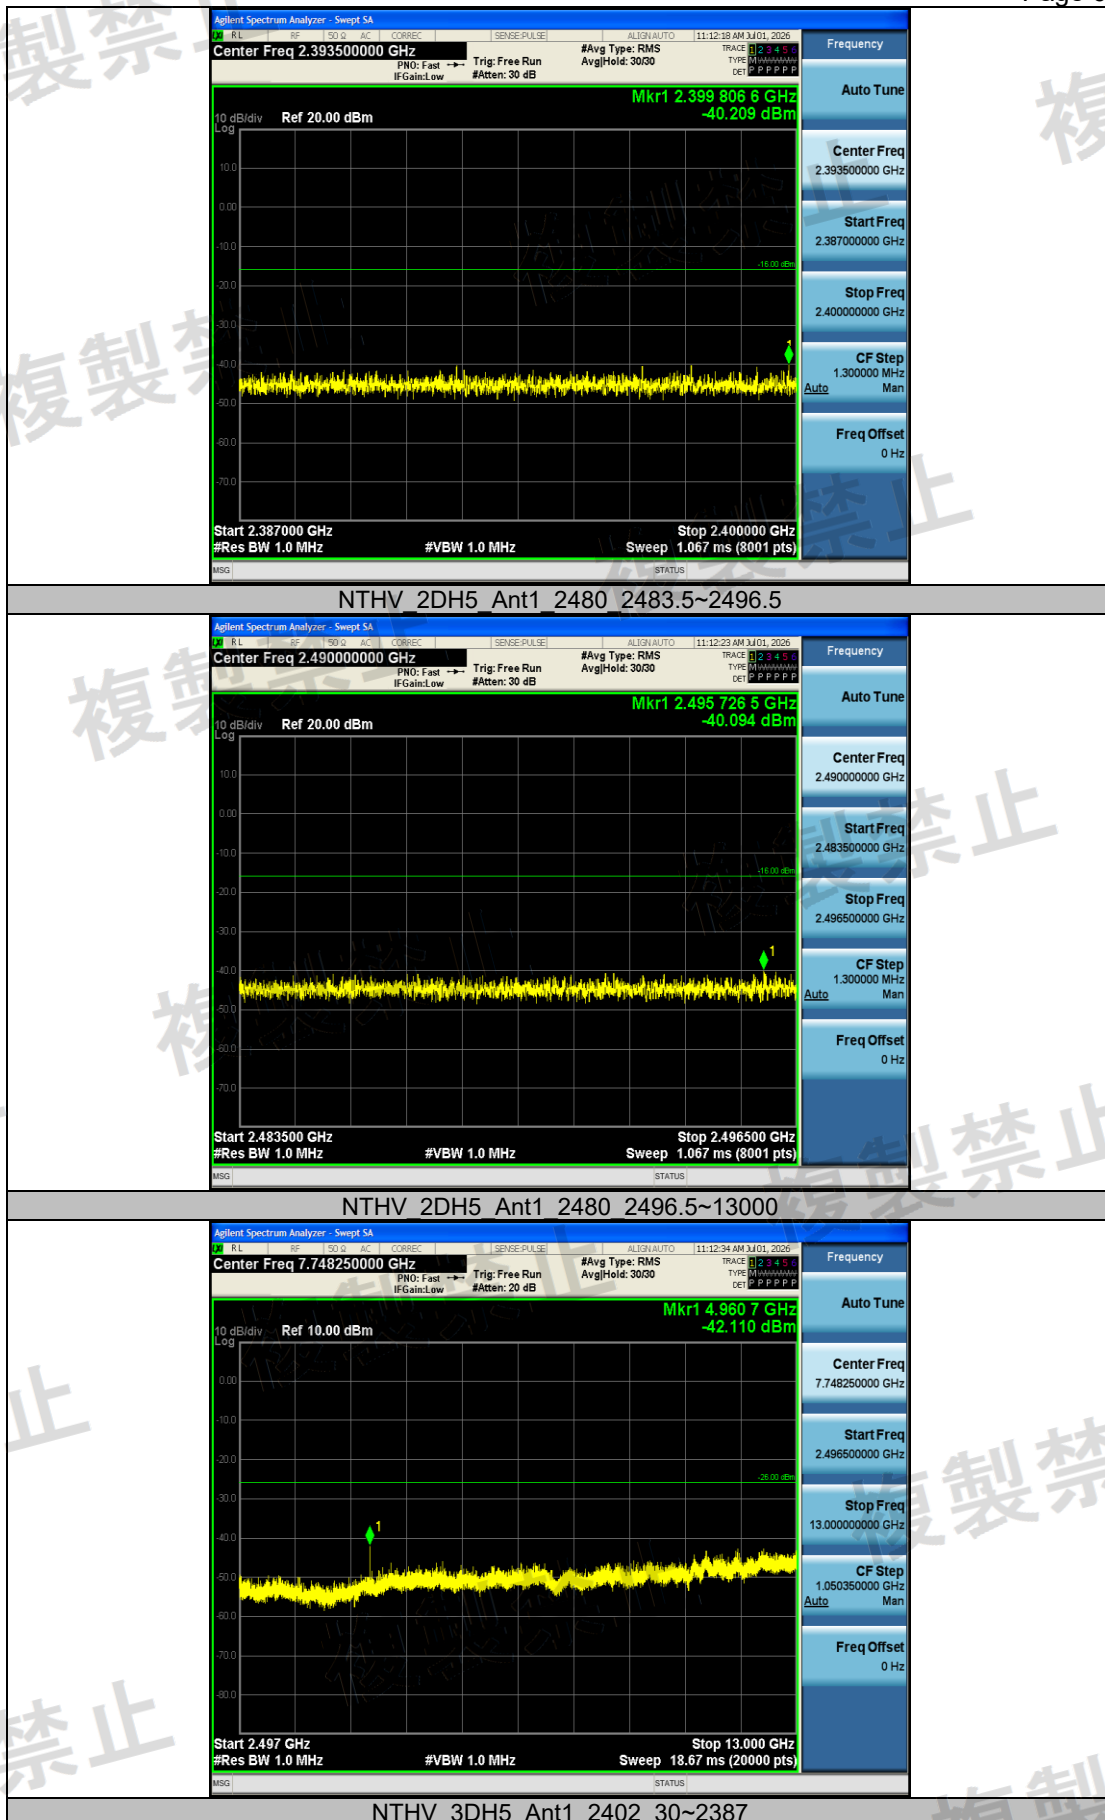


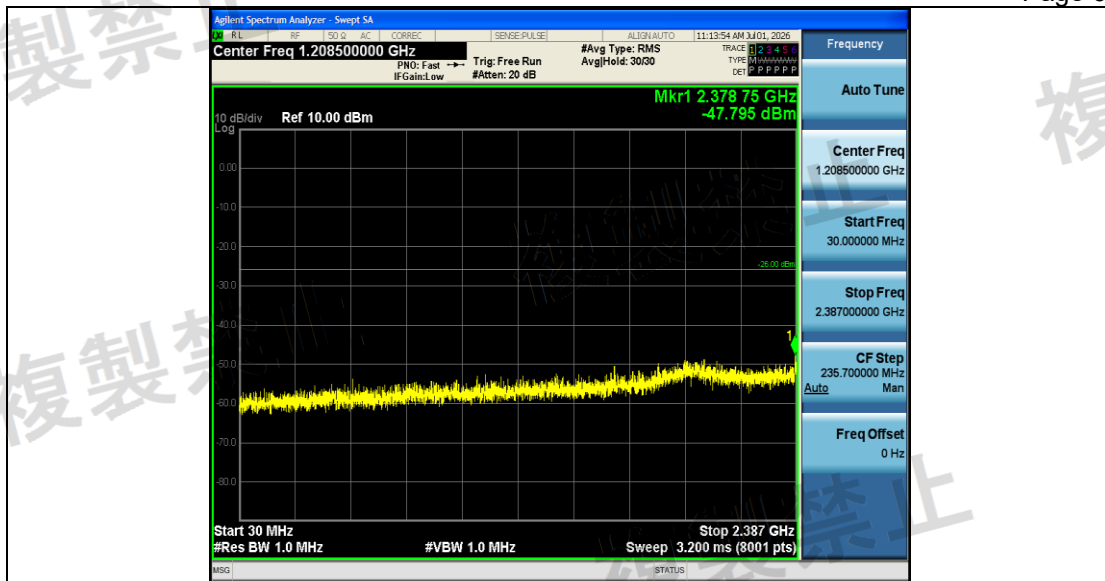

NTHV 3DH5 Ant1 2402 2387~2400

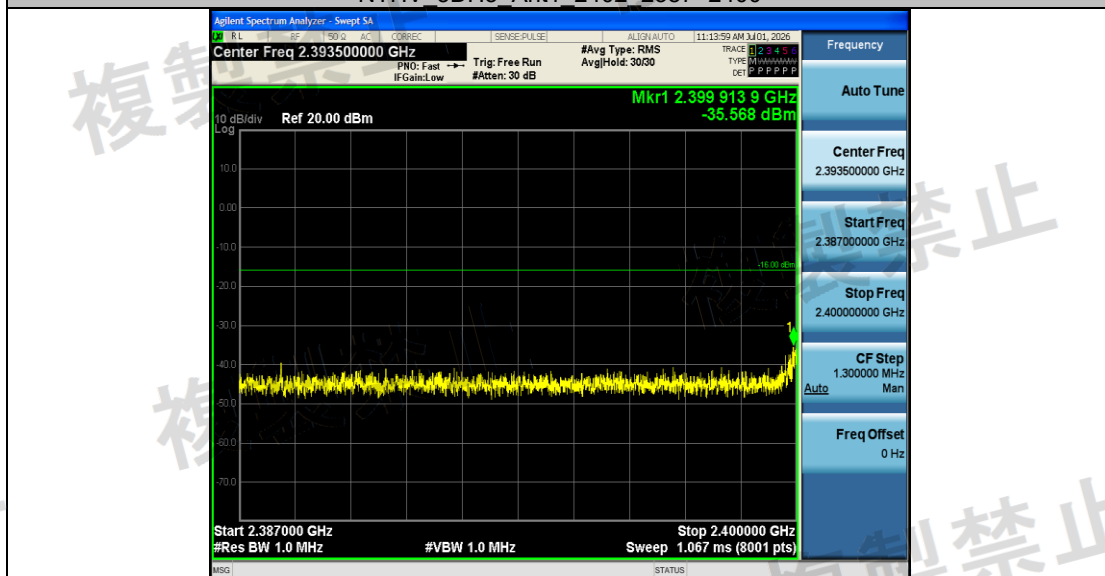



NTHV 3DH5 Ant1 2402 2483.5~2496.5

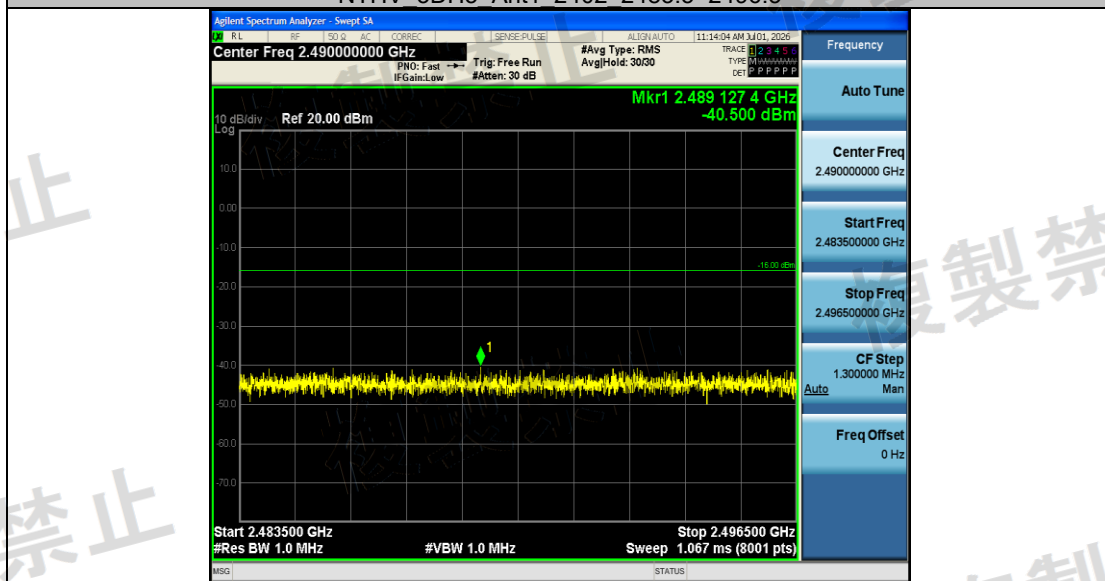


NTHV 3DH5 Ant1 2402 2496.5~13000



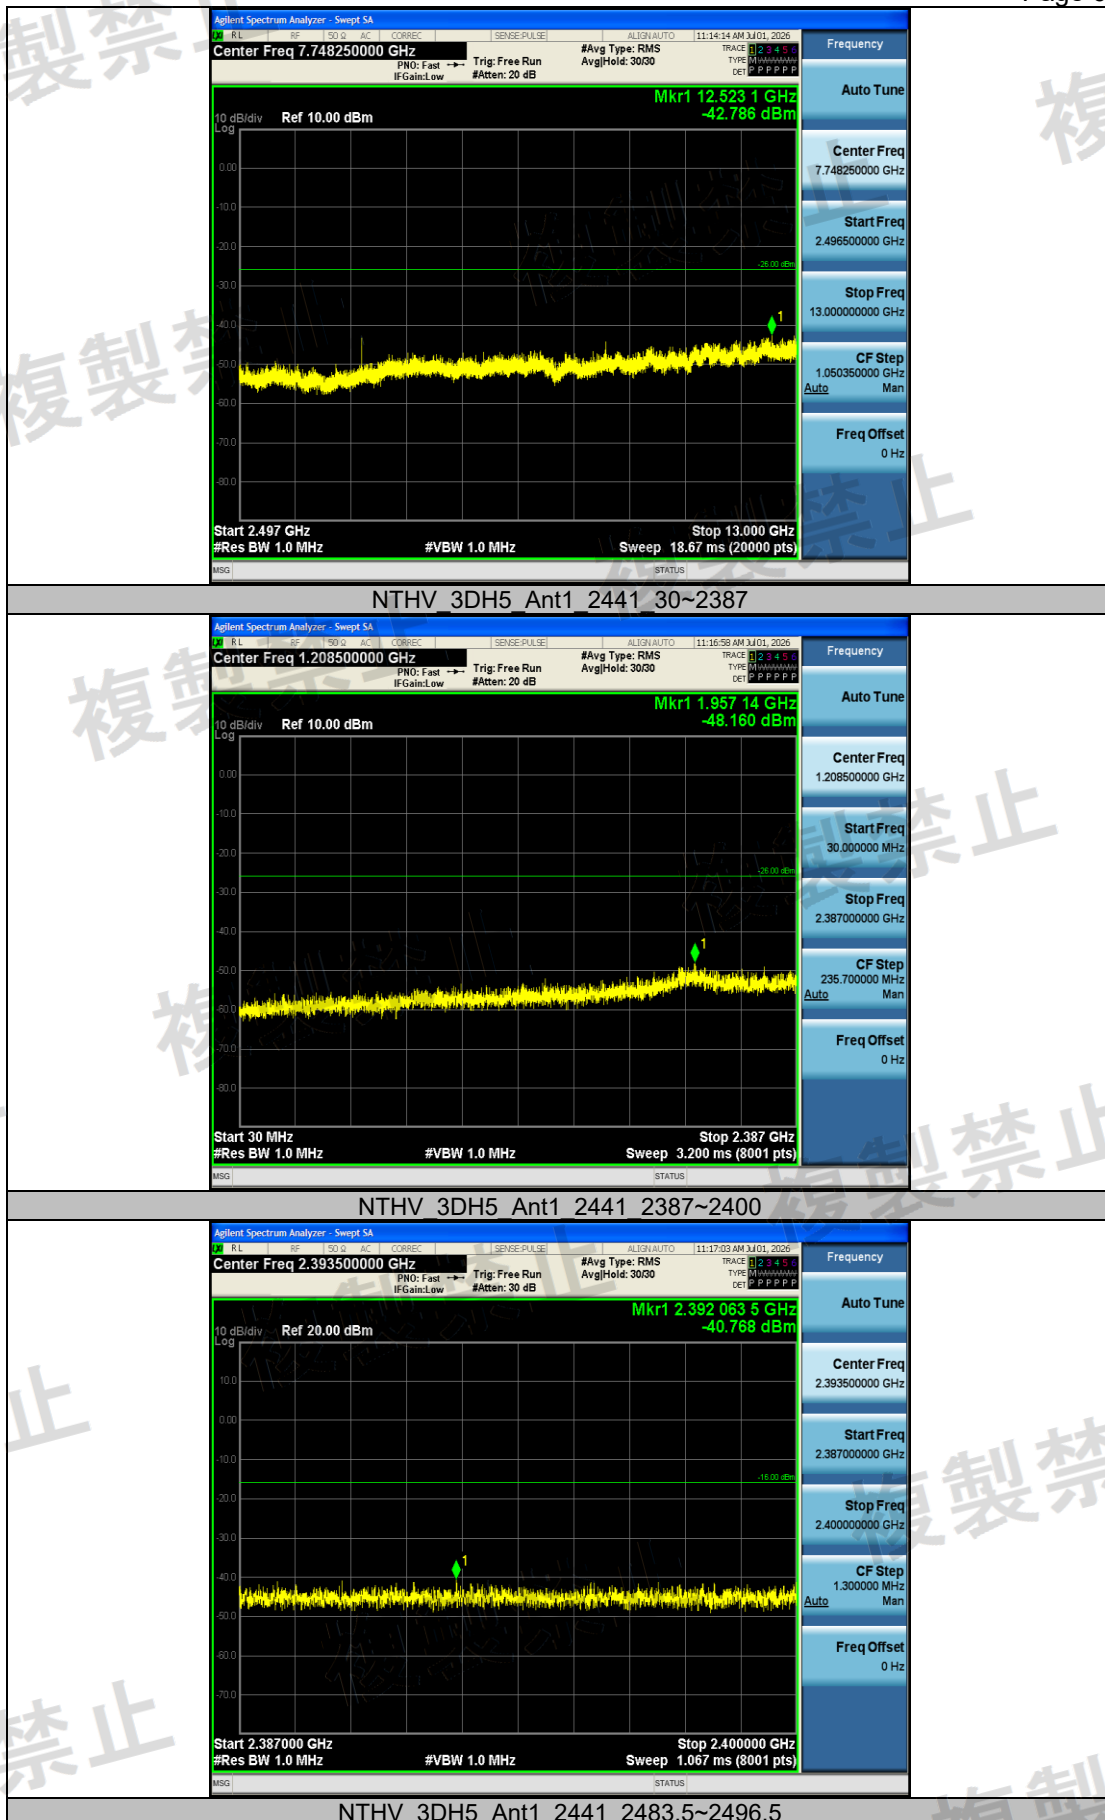

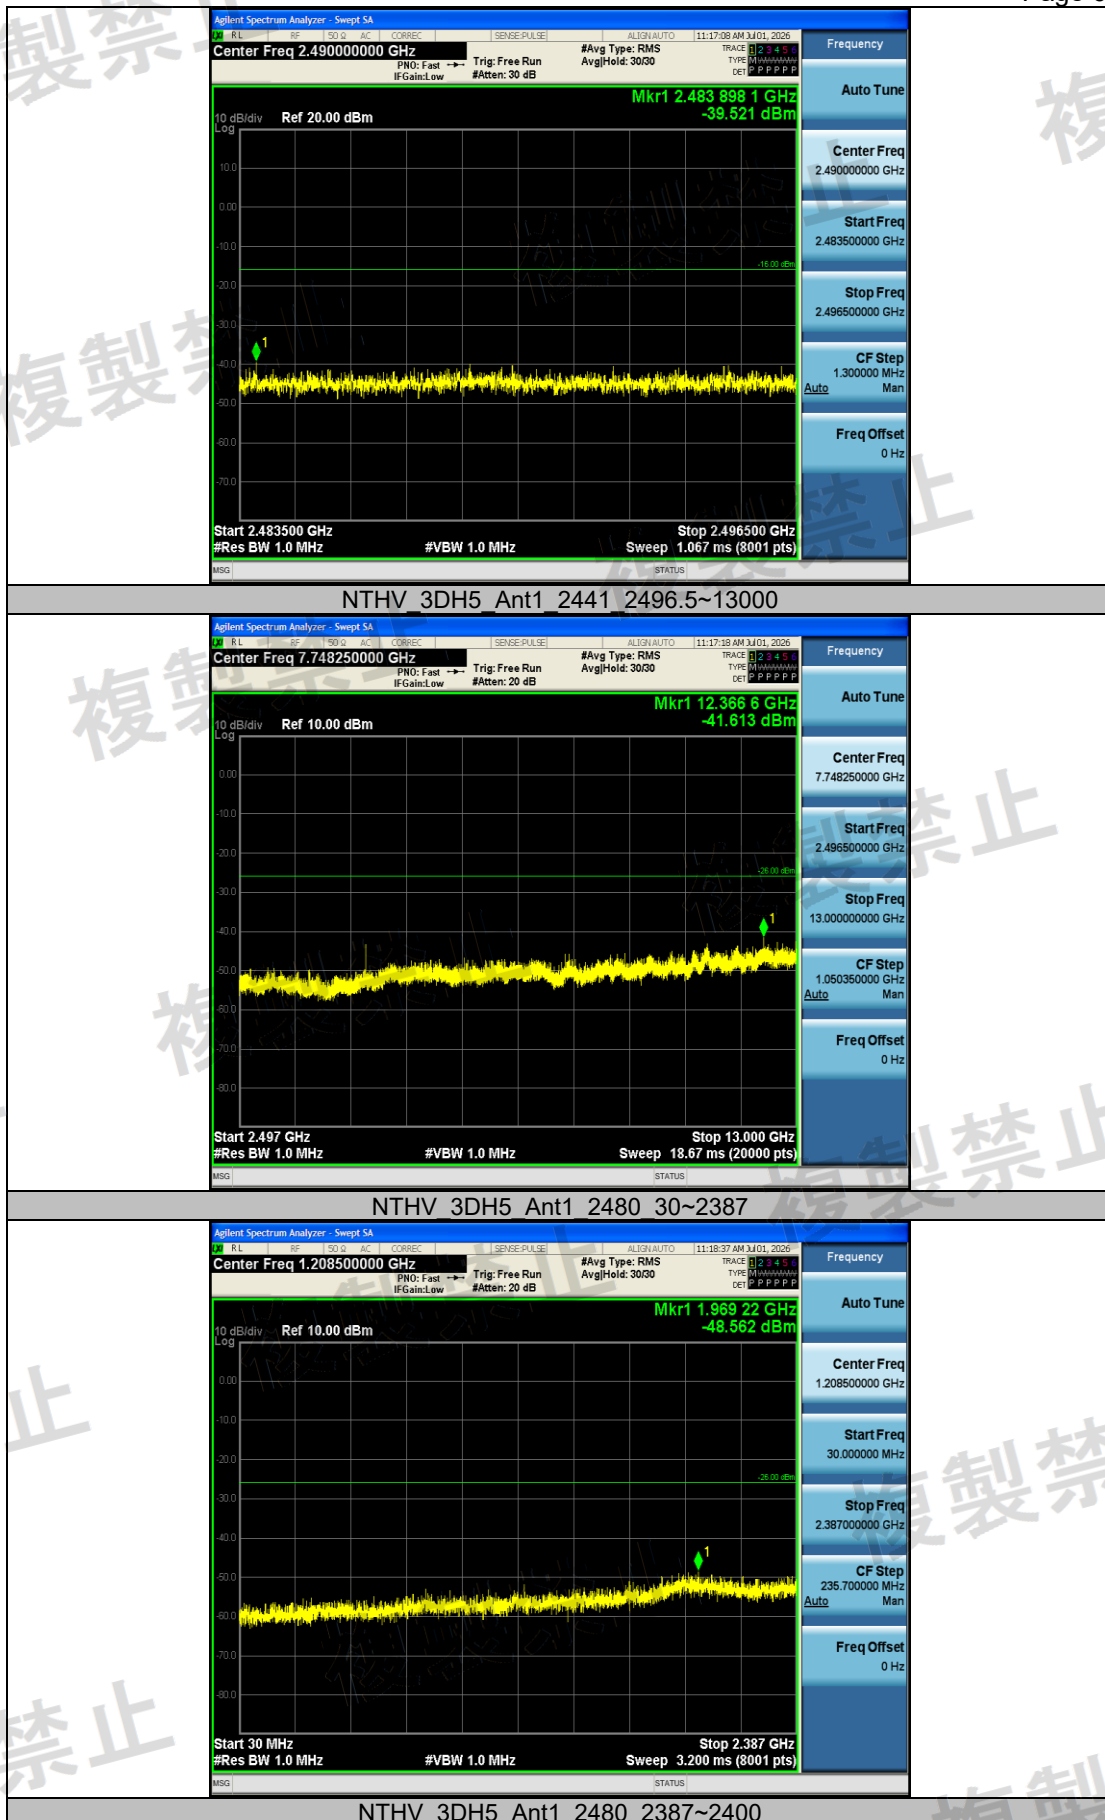


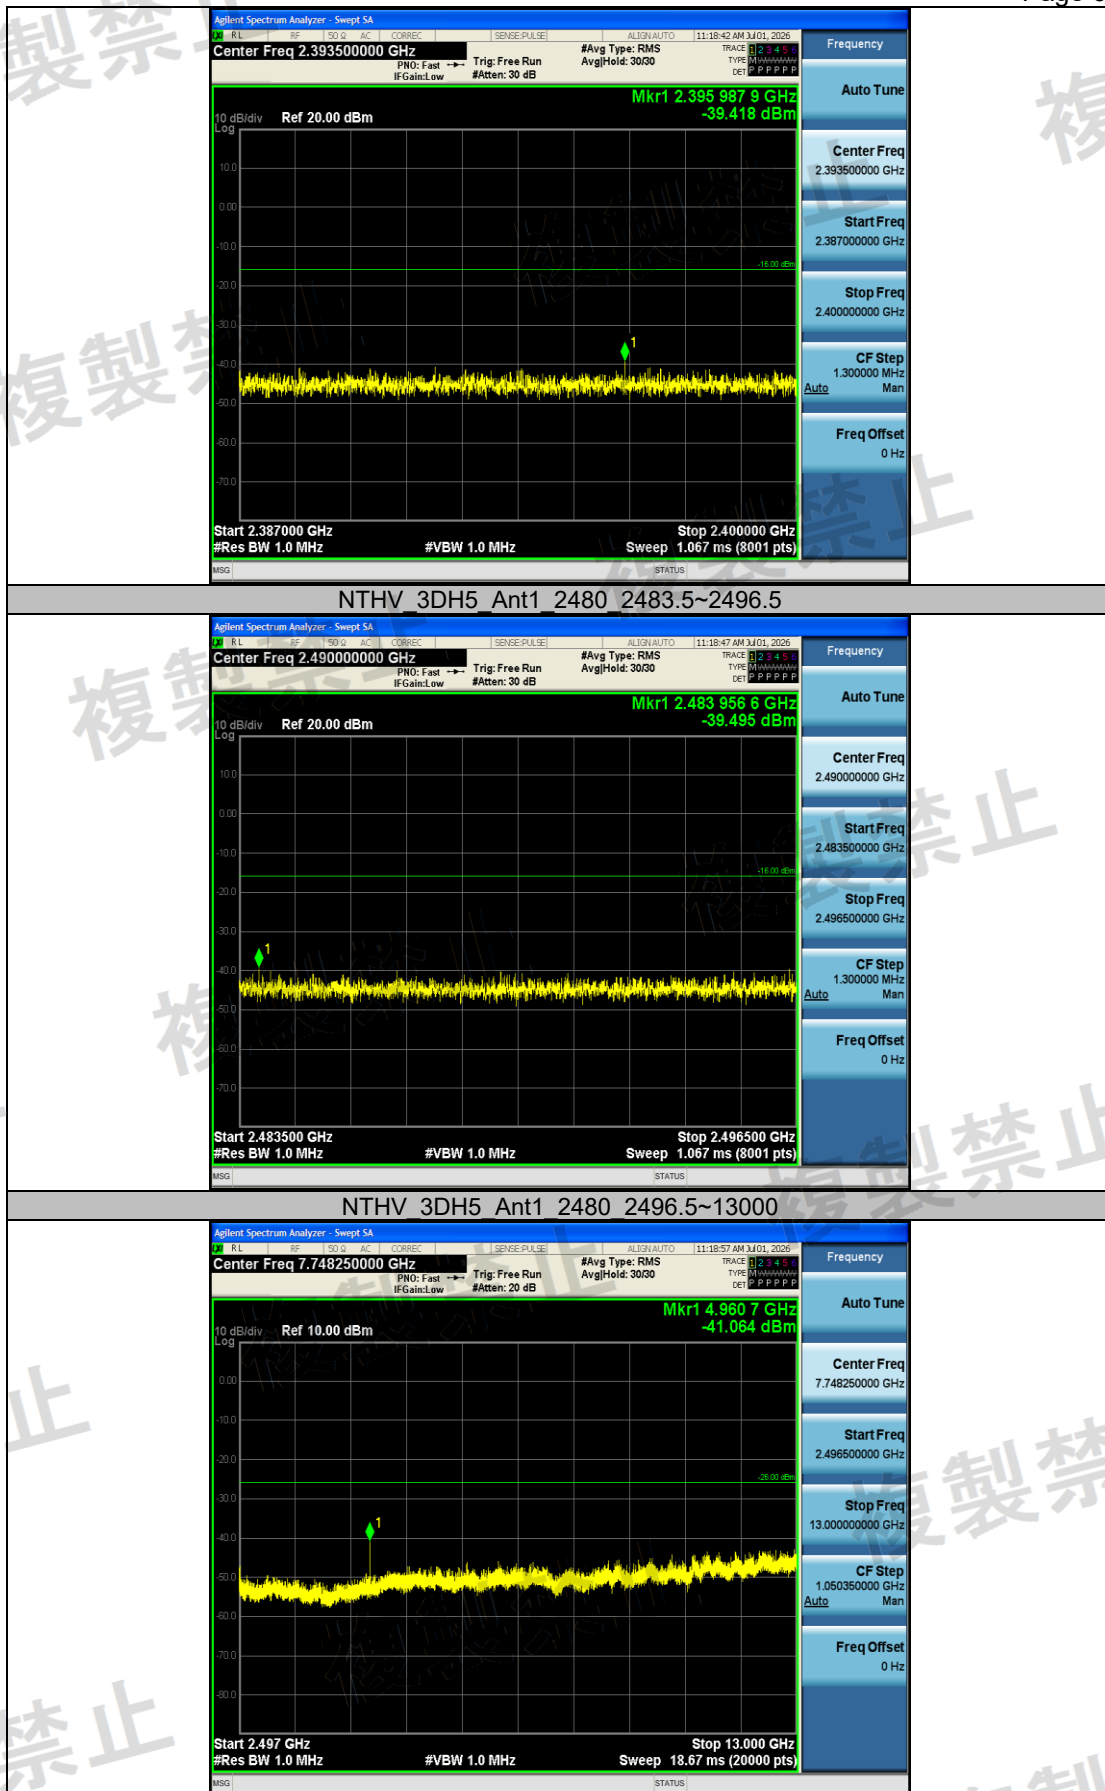



4.6. Limit of secondary radiated emissions

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

Frequency: 30MHz-13GHz

RBW:100KHz(30MHz-1GHz), 1MHz(1GHz-13GHz)

VBW:100KHz(30MHz-1GHz), 1MHz(1GHz-13GHz)

Sweep time:Auto

Dectector mode: Positive peak

Indication mode: max hold

LIMIT

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4 nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit

TEST RESULTS

Test Condition	Test Mode	Antenna	Freq (MHz)	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	DH5	Ant1	2402	30~1000	830.25	-72.43	≤-54	0.05715	≤4	PASS
				1000~13000	2519.88	-61.96	≤-47	0.63680	≤20	PASS
			2441	30~1000	930.89	-72.55	≤-54	0.05559	≤4	PASS
				1000~13000	2412.47	-58.47	≤-47	1.42233	≤20	PASS
			2480	30~1000	954.53	-72.33	≤-54	0.05848	≤4	PASS
				1000~13000	12432.97	-62.27	≤-47	0.59293	≤20	PASS
	2DH5	Ant1	2402	30~1000	971.99	-71.61	≤-54	0.06902	≤4	PASS
				1000~13000	2416.07	-60.88	≤-47	0.81658	≤20	PASS
			2441	30~1000	949.20	-72.29	≤-54	0.05902	≤4	PASS
				1000~13000	12535.58	-62.97	≤-47	0.50466	≤20	PASS
			2480	30~1000	944.71	-73.20	≤-54	0.04786	≤4	PASS
				1000~13000	12994.00	-63.13	≤-47	0.48641	≤20	PASS
	3DH5	Ant1	2402	30~1000	869.90	-72.64	≤-54	0.05445	≤4	PASS
				1000~13000	12946.00	-63.41	≤-47	0.45604	≤20	PASS
			2441	30~1000	749.13	-72.78	≤-54	0.05272	≤4	PASS





NTLV	DH5	Ant1	2480	1000~1300 0	12393. 97	-62.46	≤-47	0.5675 4	≤20	PASS
				30~1000	847.59	-72.28	≤-54	0.0591 6	≤4	PASS
				1000~1300 0	12371. 77	-62.98	≤-47	0.5035 0	≤20	PASS
			2402	30~1000	719.79	-72.34	≤-54	0.0583 4	≤4	PASS
				1000~1300 0	2413.6 7	-59.12	≤-47	1.2246 2	≤20	PASS
			2441	30~1000	894.03	-72.48	≤-54	0.0564 9	≤4	PASS
				1000~1300 0	12434. 17	-63.39	≤-47	0.4581 4	≤20	PASS
	2DH5	Ant1	2480	30~1000	800.79	-73.08	≤-54	0.0492 0	≤4	PASS
				1000~1300 0	2416.0 7	-62.94	≤-47	0.5081 6	≤20	PASS
			2402	30~1000	827.83	-72.14	≤-54	0.0610 9	≤4	PASS
				1000~1300 0	2416.0 7	-58.88	≤-47	1.2942 0	≤20	PASS
			2441	30~1000	829.16	-72.76	≤-54	0.0529 7	≤4	PASS
				1000~1300 0	12347. 77	-61.91	≤-47	0.6441 7	≤20	PASS
NTHV	3DH5	Ant1	2480	30~1000	771.44	-72.94	≤-54	0.0508 2	≤4	PASS
				1000~1300 0	12333. 37	-62.94	≤-47	0.5081 6	≤20	PASS
			2402	30~1000	843.10	-72.91	≤-54	0.0511 7	≤4	PASS
				1000~1300 0	12348. 97	-62.70	≤-47	0.5370 3	≤20	PASS
			2441	30~1000	795.33	-72.75	≤-54	0.0530 9	≤4	PASS
				1000~1300 0	12790. 59	-62.86	≤-47	0.5176 1	≤20	PASS
	DH5	Ant1	2480	30~1000	930.40	-72.91	≤-54	0.0511 7	≤4	PASS
				1000~1300 0	2413.6 7	-58.78	≤-47	1.3243 4	≤20	PASS
			2402	30~1000	820.67	-72.53	≤-54	0.0558 5	≤4	PASS
				1000~1300 0	12950. 80	-62.83	≤-47	0.5211 9	≤20	PASS
			2441	30~1000	837.28	-72.60	≤-54	0.0549 5	≤4	PASS
				1000~1300 0	2414.2 7	-60.21	≤-47	0.9528 0	≤20	PASS
NTHV	2DH5	Ant1	2480	30~1000	943.98	-72.78	≤-54	0.0527 2	≤4	PASS
				1000~1300 0	2416.6 7	-61.40	≤-47	0.7244 4	≤20	PASS
			2402	30~1000	926.40	-73.06	≤-54	0.0494 3	≤4	PASS
				1000~1300 0	2411.8 7	-61.25	≤-47	0.7498 9	≤20	PASS
			2441	30~1000	982.18	-72.69	≤-54	0.0538 3	≤4	PASS
				1000~1300 0	12874. 59	-63.06	≤-47	0.4943 1	≤20	PASS
	DH5	Ant1	2480	30~1000	842.38	-72.62	≤-54	0.0547 0	≤4	PASS
				1000~1300 0	2429.8 7	-61.61	≤-47	0.6902 4	≤20	PASS





	3DH5	Ant1	2402	30~1000	963.26	-71.85	≤-54	0.0653 1	≤4	PASS
				1000~1300 0	2520.4 8	-61.19	≤-47	0.7603 3	≤20	PASS
			2441	30~1000	963.38	-72.60	≤-54	0.0549 5	≤4	PASS
				1000~1300 0	12681. 98	-62.86	≤-47	0.5176 1	≤20	PASS
			2480	30~1000	924.10	-72.21	≤-54	0.0601 2	≤4	PASS
				1000~1300 0	12702. 99	-62.78	≤-47	0.5272 3	≤20	PASS

Note: 1. The product was tested at 25℃ and 55% humidity condition;

2. All condition has been testd, list the worst case in this item

Test plot as follows:



