

Produkte
Products



Prüfbericht - Nr.: 14026448 001		Seite 1 von 16 <i>Page 1 of 16</i>			
Test Report No.:					
Auftraggeber: <i>Client:</i>	GN Netcom A/S Lautrupbjerg 7 DK-2750 Ballerup Denmark				
Gegenstand der Prüfung: Bluetooth Headset <i>Test Item:</i>					
Bezeichnung: <i>Identification:</i>	OTE7	Serien-Nr.: <i>Serial No.:</i>	Engineering sample		
Wareneingangs-Nr.: <i>Receipt No.:</i>	00110421007-003	Eingangsdatum: <i>Date of Receipt:</i>	21.04.2011		
Prüfort: <i>Testing Location:</i>					
TÜV Rheinland (Guangdong) Ltd. EMC Laboratory Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou, 510650, P.R. China					
Prüfgrundlage: <i>Test Specification:</i>					
FCC Part 15 Subpart C ANSI C63.4-2003 CISPR 22:1997					
Prüfergebnis: <i>Test Results:</i>					
Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .					
Prüflaboratorium: <i>Testing Laboratory:</i>					
TÜV Rheinland (Guangdong) Ltd. No. 199 Kezhu Road, Guangzhou Science City, Guangzhou, Guangdong, 510663, P.R.China					
geprüft/ tested by:		kontrolliert/ reviewed by:			
18.05.2011 Mr. Ken Kuang Project Engineer		18.05.2010 Mr. Liangdong Xie Project Manager			
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>		
Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>		
Sonstiges/ Other Aspects: : FCCID: BCE-OTE7					
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top;"> Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet </td> <td style="width: 50%; vertical-align: top;"> Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested </td> </tr> </table>				Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use.....	5
Submitted documents.....	5
Remark	5
Special accessories and auxiliary equipment	5
List of Test and Measurement Instruments.....	6
Results FCC Part 15 – Subpart C	7
Subclause 15.203 – Antenna Information	Pass..... 7
Subclause 15.204 – Antenna Information	Pass..... 7
Subclause 15.207 – Disturbance Voltage on AC Mains.....	N/A..... 7
Subclause 15.247 (a)(1) – Carrier Frequency Separation.....	Pass..... 8
Subclause 15.247 (a)(1)(iii) – Number of hopping channels	Pass..... 8
Subclause 15.247 (a)(1)(iii) – Time of Occupancy (Dwell Time)	Pass..... 9
Subclause 15.247 (a) – 20 dB Bandwidth.....	Pass..... 9
Subclause 15.247 (a) – Hopping Sequence	Pass..... 10
Subclause 15.247 (a) – Equal Hopping Frequency Use.....	Pass..... 11
Subclause 15.247 (a) – Receiver Input Bandwidth.....	Pass..... 12
Subclause 15.247 (a) – Receiver Hopping Capability	Pass..... 12
Subclause 15.247 (b)(1) – Peak Output Power	Pass..... 12
Subclause 15.247 (d) – Band edge compliance of conducted emissions	Pass..... 13
Subclause 15.205 – Band edge compliance of radiated emissions	Pass..... 13
Subclause 15.247 (d) – Spurious Conducted Emissions	Pass..... 14
Subclause 15.247 (c) – Spurious Radiated Emissions	Pass..... 15
Appendix 1 – Test protocols	20 pages
Appendix 2 – Test setup	2 pages

Appendix 3 – Photo documentation	5 pages
Appendix 4 – Product documentation	13 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK; Pi/4 DQPSK; 8 DPSK
Number of channels	79
Channel separation	1 MHz
Type of antenna	PIFA
Antenna gain (dBi)	1
Power level	fix
Type of equipment	stand alone, plug-in radio device
Connection to public utility power line	No
Nominal voltage	V_{nor} : 3.7 V
Independent Operation Modes	Page scan Inquiry scan Connection state - ACL Link Connection state - SCO Link

Product function and intended use

The test item is a Bluetooth Headset based on the Bluetooth technology.

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With the introduction of the enhanced data rate (EDR) feature, the data rates can be up to 3 Mb/s.

An increase in the peak data rate beyond the basic rate of 1 Mb/s is achieved by modulating the RF carrier using phase shift keying (PSK) techniques, resulting in an increase of two to three times the number of bits per symbol. The 2 Mb/s EDR packets use a Pi/4-DQPSK modulation and the 3 Mb/s EDR packets use 8DPSK modulation. The USB connector is for charging only, no data exchange supported.

Submitted documents

Circuit Diagram
Block Diagram
Bill of material
User manual

Remark

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst case.

Special accessories and auxiliary equipment

The product has been tested together with the following additional accessory:

N/A

List of Test and Measurement Instruments

Kind of Equipment	Manufacturer	Type	S/N	Due Date
FSP30 Spectrum Analyzer	Rohde & Schwarz	FSP30	100286	16-Mar-12
EMI Test Receiver	Rohde & Schwarz	ESCI	100216	16-Mar-12
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	209	21-Aug-12
Double-Ridged Waveguide Horn Antenna	Rohde & Schwarz	HF 906	100385	24-Aug-11
Band Reject Filter	Micro-Tronics	BRM50702	023	16-Mar-12
Pre-Amplifier	MITEQ	AFS42-00101800-25-S-42	1101599	11-Aug-13
Horn Antenna	EMCO	3160-09	21642	26-Jun-14
Pre-Amplifier	MITEQ	AFS33-18002650-30-8P-44	1108282	16-Mar-13
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100111	16-Mar-13
SAC	Albatross Projects GmbH	N/A	9460000.9	17-Jul-13
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100316	16-Mar-12
Artificial Mains Network	Rohde & Schwarz	ESH3-Z5	100114	16-Mar-12
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100701	16-Mar-12

Results FCC Part 15 – Subpart C

Subclause 15.203 – Antenna Information		Pass
Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Results:	Permanent attached antenna	
Verdict:	Pass	
Subclause 15.204 – Antenna Information		Pass
Requirement:	Provide information for every antenna proposed for the use with the EUT	
Results:	a) Antenna type: PIFA b) Manufacturer and model no: N.A. c) Gain with reference to an isotropic radiator: 1 dBi	
Verdict:	Pass	
Subclause 15.207 – Disturbance Voltage on AC Mains		N/A
EUT could not be operated during battery charging.		

Subclause 15.247 (a)(1) – Carrier Frequency Separation		Pass
Requirement:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.	
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (hopping on), GFSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%		
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. The centre frequencies of the hopping channels are separated by more than the 2/3*20dB bandwidth. For test Results plots refer to Appendix 1, page 2.	
Verdict:	Pass	

Subclause 15.247 (a)(1)(iii) – Number of hopping channels		Pass
Requirement:	Frequency hopping systems operating in the 2400MHz-2483.5MHz bands shall use at least 15 hopping frequencies.	
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (hopping on), GFSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%		
Results:	The total number of hopping frequencies is more than 15. For test Results plots refer to Appendix 1, page 3.	
Verdict:	Pass	

Subclause 15.247 (a)(1)(iii) – Time of Occupancy (Dwell Time)		Pass
Requirement:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.	
Test Specification	: FCC Part 15 Subpart A – Subclause 15.31	
Mode of operation	: Tx mode (hopping on), DH5 packet	
Port of testing	: Temporary antenna port	
Detector	: Peak	
RBW/VBW	: 1 MHz / 3 MHz	
Supply voltage	: 3.7VDC from DC power supply	
Temperature	: 23°C	
Humidity	: 50%	
Results:	Time period calculation = 0.4 x 79 = 31.6s Dwell time = 64 x 2.896 x 10 ⁻³ = 185.3 x 10 ⁻³ <= 400 x 10 ⁻³ s	
For test protocols please refer to Appendix 1, page 5.		
Verdict:	Pass	

Subclause 15.247 (a) – 20 dB Bandwidth		Pass	
Requirement:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.		
Test Specification	: FCC Part 15 Subpart A – Subclause 15.31		
Mode of operation	: Tx mode (2402MHz, 2441MHz, 2480MHz)		
Port of testing	: Temporary antenna port		
Detector	: Peak		
RBW/VBW	: 30 kHz / 100 kHz		
Supply voltage	: 3.7VDC from DC power supply		
Temperature	: 23°C		
Humidity	: 50%		
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1, page 5-7.		
8 DPSK Modulation			
Frequency (MHz)	20 dB left (MHz)	20 dB right (MHz)	20dB bandwidth (MHz)
2402	0.654	0.624	1.278
2441	0.648	0.624	1.272
2480	0.654	0.618	1.272
GFSK Modulation			


Frequency (MHz)	20 dB left (MHz)	20 dB right (MHz)	20dB bandwidth (MHz)
2402	0.456	0.480	0.936
2441	0.456	0.486	0.942
2480	0.456	0.474	0.930

Subclause 15.247 (a) – Hopping Sequence**Pass**

Requirement: The hopping sequence is generated and provided with an example.

Hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master. The X input determines the phase in the 32-hop segment, whereas Y1 and Y2 selects between master-to-slave and slave-to-master transmission. The inputs A to D determine the ordering within the segment, the inputs E and F determine the mapping onto the hop frequencies.

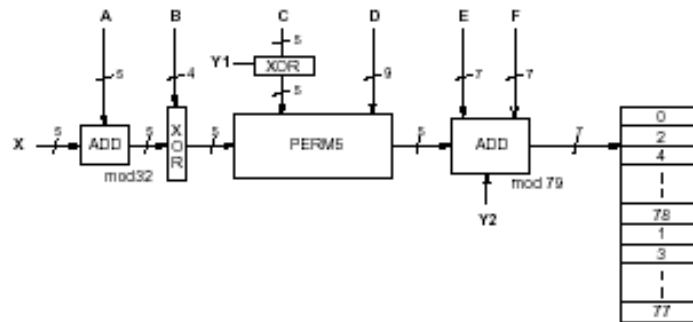

Example data:

Hop sequence {k} for CONNECTION STATE:

CLK start: 0x0000010

ULAP: 0x00000000

#ticks: 00 02 | 04 06 | 08 0a | 0c 0e | 10 12 | 14 16 | 18 1a | 1c 1e |

```

0x0000010: 08 66 | 10 70 | 12 19 | 14 23 | 16 01 | 18 05 | 20 33 | 22 37 |
0x0000030: 24 03 | 26 07 | 28 35 | 30 39 | 32 72 | 34 76 | 36 25 | 38 29 |
0x0000050: 40 74 | 42 78 | 44 27 | 46 31 | 48 09 | 50 13 | 52 41 | 54 45 |
0x0000070: 56 11 | 58 15 | 60 43 | 62 47 | 32 17 | 36 19 | 34 49 | 38 51 |
0x0000090: 40 21 | 44 23 | 42 53 | 46 55 | 48 33 | 52 35 | 50 65 | 54 67 |
0x00000b0: 56 37 | 60 39 | 58 69 | 62 71 | 64 25 | 68 27 | 66 57 | 70 59 |
0x00000d0: 72 29 | 76 31 | 74 61 | 78 63 | 01 41 | 05 43 | 03 73 | 07 75 |
0x00000f0: 09 45 | 13 47 | 11 77 | 15 00 | 64 49 | 66 53 | 68 02 | 70 06 |
0x0000110: 01 51 | 03 55 | 05 04 | 07 08 | 72 57 | 74 61 | 76 10 | 78 14 |
0x0000130: 09 59 | 11 63 | 13 12 | 15 16 | 17 65 | 19 69 | 21 18 | 23 22 |
0x0000150: 33 67 | 35 71 | 37 20 | 39 24 | 25 73 | 27 77 | 29 26 | 31 30 |
0x0000170: 41 75 | 43 00 | 45 28 | 47 32 | 17 02 | 21 04 | 19 34 | 23 36 |
0x0000190: 33 06 | 37 08 | 35 38 | 39 40 | 25 10 | 29 12 | 27 42 | 31 44 |
0x00001b0: 41 14 | 45 16 | 43 46 | 47 48 | 49 18 | 53 20 | 51 50 | 55 52 |
0x00001d0: 65 22 | 69 24 | 67 54 | 71 56 | 57 26 | 61 28 | 59 58 | 63 60 |
0x00001f0: 73 30 | 77 32 | 75 62 | 00 64 | 49 34 | 51 42 | 57 66 | 59 74 |
0x0000210: 53 36 | 55 44 | 61 68 | 63 76 | 65 50 | 67 58 | 73 03 | 75 11 |
0x0000230: 69 52 | 71 60 | 77 05 | 00 13 | 02 38 | 04 46 | 10 70 | 12 78 |
0x0000250: 06 40 | 08 48 | 14 72 | 16 01 | 18 54 | 20 62 | 26 07 | 28 15 |
0x0000270: 22 56 | 24 64 | 30 09 | 32 17 | 02 66 | 06 74 | 10 19 | 14 27 |
0x0000290: 04 70 | 08 78 | 12 23 | 16 31 | 18 03 | 22 11 | 26 35 | 30 43 |
0x00002b0: 20 07 | 24 15 | 28 39 | 32 47 | 34 68 | 38 76 | 42 21 | 46 29 |
0x00002d0: 36 72 | 40 01 | 44 25 | 48 33 | 50 05 | 54 13 | 58 37 | 62 45 |
0x00002f0: 52 09 | 56 17 | 60 41 | 64 49 | 34 19 | 36 35 | 50 51 | 52 67 |
0x0000310: 38 21 | 40 37 | 54 53 | 56 69 | 42 27 | 44 43 | 58 59 | 60 75 |
0x0000330: 46 29 | 48 45 | 62 61 | 64 77 | 66 23 | 68 39 | 03 55 | 05 71 |
0x0000350: 70 25 | 72 41 | 07 57 | 09 73 | 74 31 | 76 47 | 11 63 | 13 00 |
0x0000370: 78 33 | 01 49 | 15 65 | 17 02 | 66 51 | 70 67 | 03 04 | 07 20 |
0x0000390: 68 55 | 72 71 | 05 08 | 09 24 | 74 59 | 78 75 | 11 12 | 15 28 |
0x00003b0: 76 63 | 01 00 | 13 16 | 17 32 | 19 53 | 23 69 | 35 06 | 39 22 |
0x00003d0: 21 57 | 25 73 | 37 10 | 41 26 | 27 61 | 31 77 | 43 14 | 47 30 |
0x00003f0: 29 65 | 33 02 | 45 18 | 49 34 | 19 04 | 21 08 | 23 20 | 25 24 |

```

Subclause 15.247 (a) – Equal Hopping Frequency Use**Pass**

Requirement: Each of the transmitter's hopping channels is used equally on average.

Equal hopping frequency use

The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.

Subclause 15.247 (a) – Receiver Input Bandwidth	Pass
Requirement: The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.	
Receiver input bandwidth The receiver bandwidth is equal to the receiver bandwidth in the 79 hopping channel mode, which is 1 MHz. The receiver bandwidth was verified during Bluetooth RF conformance testing.	

Subclause 15.247 (a) – Receiver Hopping Capability	Pass
Requirement: The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.	
Receiver hopping Capability The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.	

Subclause 15.247 (b)(1) – Peak Output Power				Pass	
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz) Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 3 MHz / 10 MHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%					
Requirement:		For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 Watt. For all other frequency hopping systems in the 2400 – 2483.5 MHz band: 0.125 Watts.			
Results:		For test protocols please refer to Appendix 1, page 8-12.			
GFSK Modulation					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2402	-0.69	3.52	2.830	1 / 30.0	Pass
2441	-1.79	3.65	1.860	1 / 30.0	Pass
2480	-2.58	3.60	1.020	1 / 30.0	Pass
Pi/4 DQPSK Modulation					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2402	-0.85	3.52	2.670	1 / 30.0	Pass
2441	-1.79	3.65	1.860	1 / 30.0	Pass

2480	-3.65	3.60	-0.050	1 / 30.0	Pass
8 DPSK Modulation					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2402	-0.63	3.52	2.890	1 / 30.0	Pass
2441	-2.65	3.65	1.000	1 / 30.0	Pass
2480	-3.38	3.60	0.220	1 / 30.0	Pass

Subclause 15.247 (d) – Band edge compliance of conducted emissions		Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2480MHz), 8DPSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%		
Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. There is no peak found outside any 100 kHz bandwidth of the operating frequency band. For test protocols refer to Appendix 1, page 13-14.	

Subclause 15.205 – Band edge compliance of radiated emissions		Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2480MHz), 8DPSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%		
Requirement:	Radiated emissions which fall in the restricted bands, as defined in 15.205 (a), must also comply with the radiated emission limits specified in 15.209(a).	
Results:	There is no peak found in the restricted bands. For test protocols refer to Appendix 1, page 15-18.	

Subclause 15.247 (d) – Spurious Conducted Emissions					Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), 8DPSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.7VDC from DC power supply Temperature : 23 °C Humidity : 50 %					
Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. There is no peak found outside any 100kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(d). For test protocols refer to Appendix 1, page 19-20.					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	4804.000	-38.76	-1.74	-37.02	Pass
2441	4850.000	-37.86	-2.73	-35.13	Pass
2480	4950.000	-35.65	-3.85	-31.80	Pass

Subclause 15.247 (c) – Spurious Radiated Emissions		Pass
Test Specification : ANSI C63.4 – 2003 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), 8DPSK Port of testing : Enclosure Detector : Peak RBW/VBW : 100 kHz / 300 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz Supply voltage : internal batteries has been activated Temperature : 23°C Humidity : 50%		
Requirement:	In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).	
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.	
Tx frequency 2402MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
38.000	10.0	40 / QP
53.150	9.8	40 / QP
119.000	9.4	43.5 / QP
150.300	12.0	43.5 / QP
385.400	12.9	46 / QP
533.900	16.2	46 / QP
1602.000	37.3	74.0 / P
1602.000	30.7	54.0 / A
4804.000	42.2	74.0 / P
4804.000	31.0	54.0 / A
Tx frequency 2402MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
43.350	10.6	40 / QP
56.900	9.7	40 / QP
148.350	11.6	43.5 / QP
330.350	11.8	46 / QP
437.750	14.5	46 / QP
571.400	17.1	46 / QP
1602.000	36.5	74.0 / P
1602.000	29.2	54.0 / A
4804.000	41.9	74.0 / P
4804.000	30.6	54.0 / A
Tx frequency 2441MHz Vertical Polarization		
Freq	Level	Limit/ Detector

MHz	dBuV/m	dBuV/m
34.750	9.9	40 / QP
52.650	9.6	40 / QP
144.350	11.2	43.5 / QP
339.900	12.0	46 / QP
540.850	16.6	46 / QP
656.250	19.7	46 / QP
1627.000	36.0	74.0 / P
1627.000	27.0	54.0 / A
4882.000	44.0	74.0 / P
4882.000	33.9	54.0 / A
Tx frequency 2441MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
39.450	11.0	40 / QP
54.150	10.0	40 / QP
145.300	11.6	43.5 / QP
173.900	9.9	43.5 / QP
371.450	12.7	46 / QP
529.800	16.1	46 / QP
1627.000	35.2	74.0 / P
1627.000	28.0	54.0 / A
4882.000	41.9	74.0 / P
4882.000	29.6	54.0 / A
Tx frequency 2480MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
37.300	9.5	40 / QP
47.100	10.2	40 / QP
93.300	6.4	43.5 / QP
146.050	11.4	43.5 / QP
325.850	11.7	46 / QP
524.100	17.1	46 / QP
1652.000	38.1	74.0 / P
1652.000	31.4	54.0 / A
4960.000	43.4	74.0 / P
4960.000	31.8	54.0 / A
Tx frequency 2480MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
40.650	10.1	40 / QP
57.650	9.9	40 / QP
126.900	10.0	43.5 / QP
149.200	11.9	43.5 / QP
291.900	10.5	46 / QP
473.900	15.2	46 / QP
1652.000	34.6	74.0 / P
1652.000	25.9	54.0 / A
4960.000	42.9	74.0 / P
4960.000	30.8	54.0 / A

Appendix 1

Test Results

Carrier Frequency Separation

**MARKER 1**

2.441 GHz

Ref 20 dBm

*Att 30 dB

*RBW 100 kHz


VBW 300 kHz

SWT 2.5 ms

Marker 1 [T1]

-1.71 dBm

2.441000000 GHz

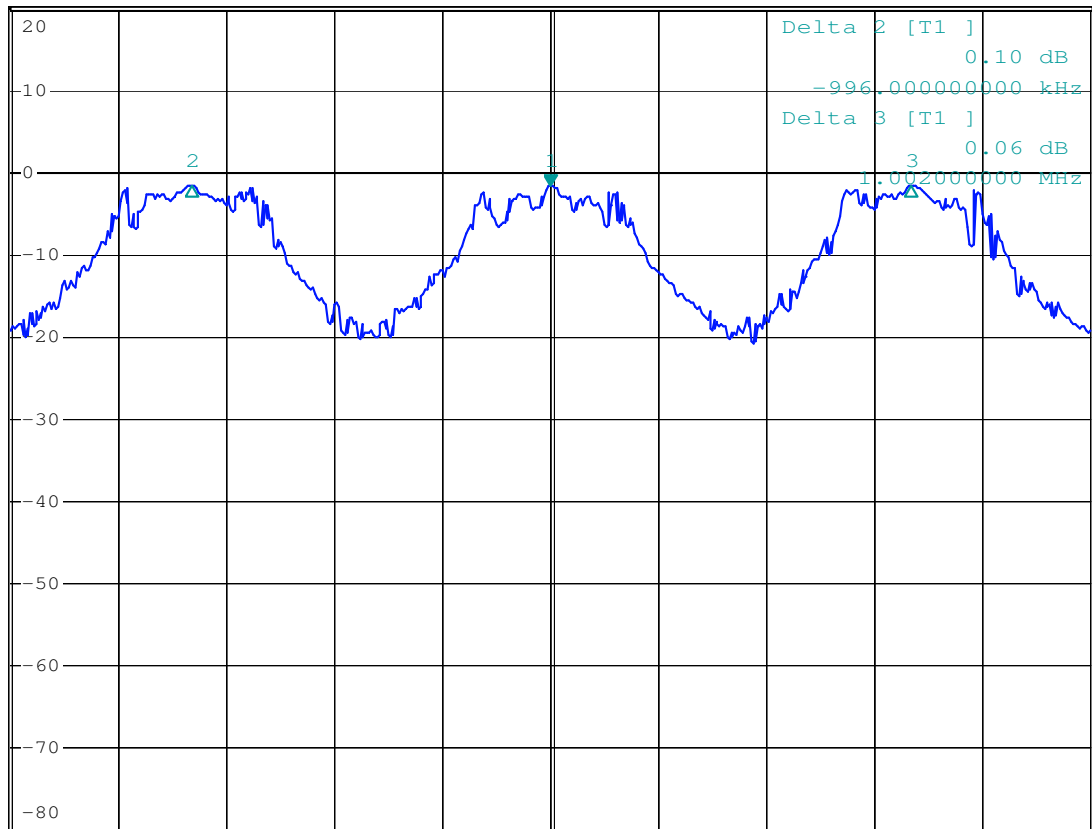1 PK
MAXH



Center 2.441 GHz

300 kHz/


Span 3 MHz

Date: 28.APR.2011 15:15:49


Number of hopping channels

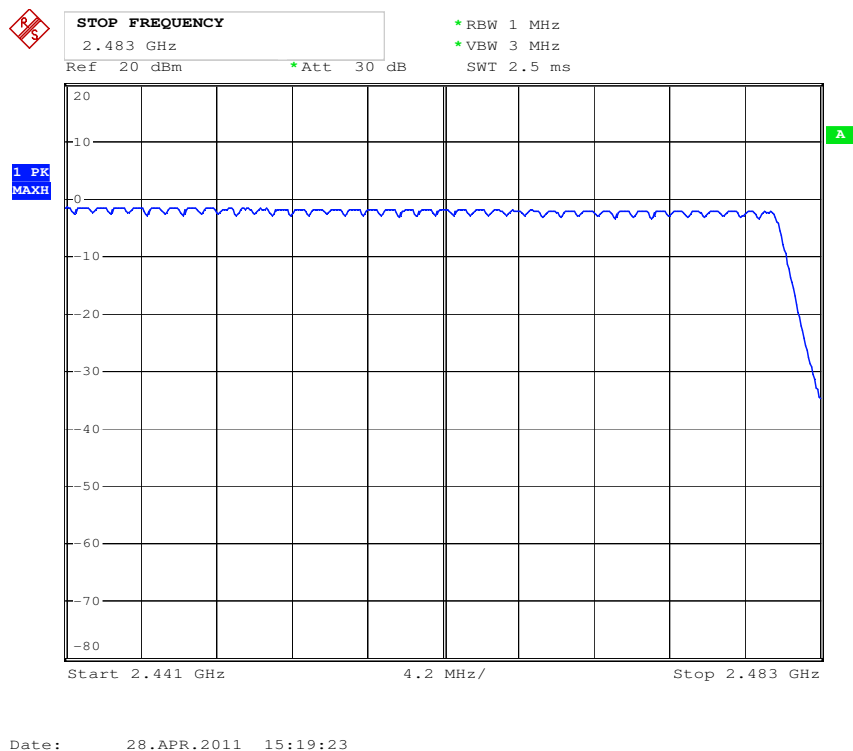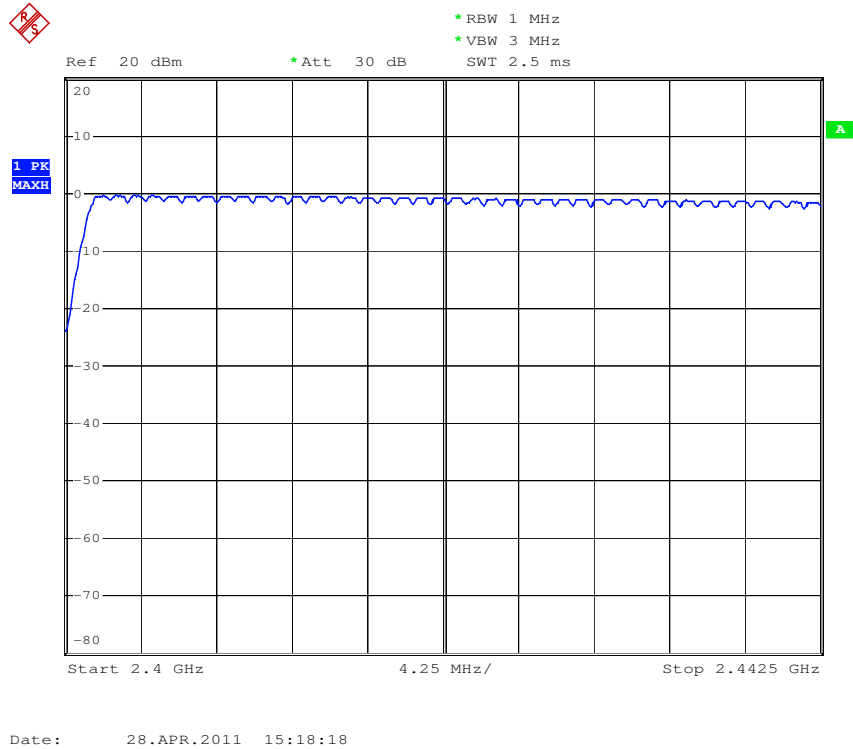

Dwell Time

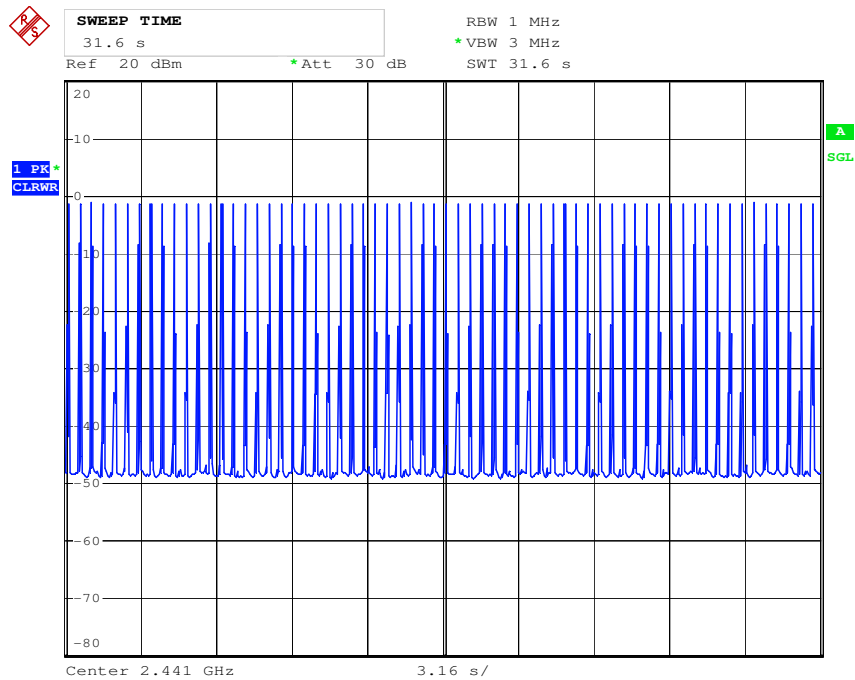

Date: 28.APR.2011 15:22:22

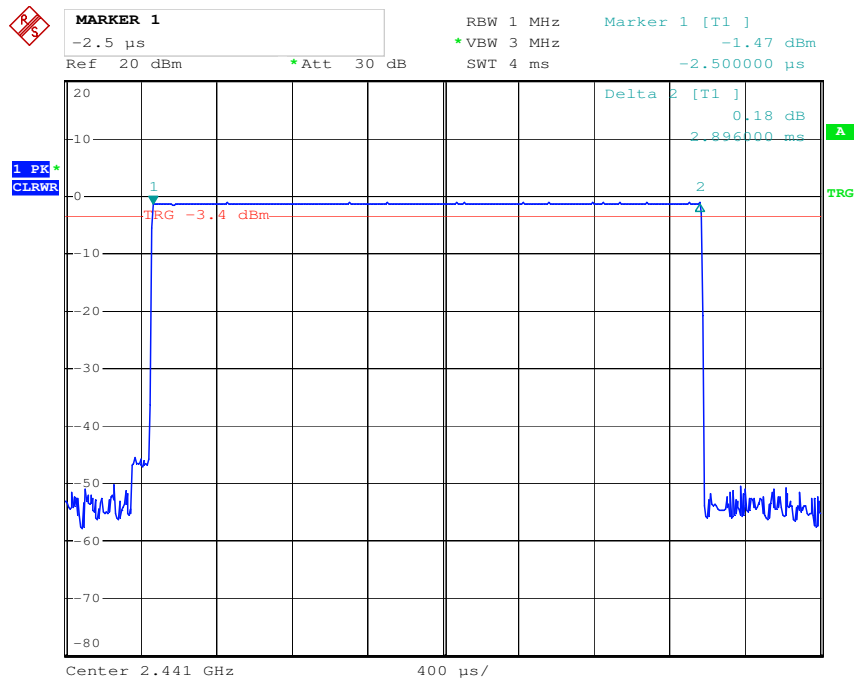


Date: 28.APR.2011 15:24:28

20dB Bandwidth


Modulation: 8 DPSK

Tx frequency: 2402MHz

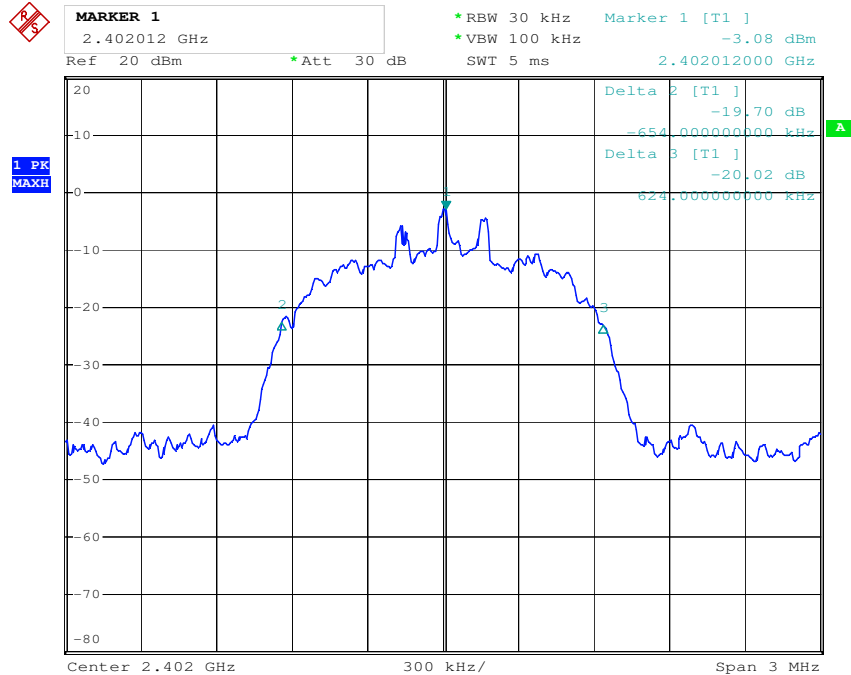


Modulation: 8 DPSK

Tx frequency: 2441MHz

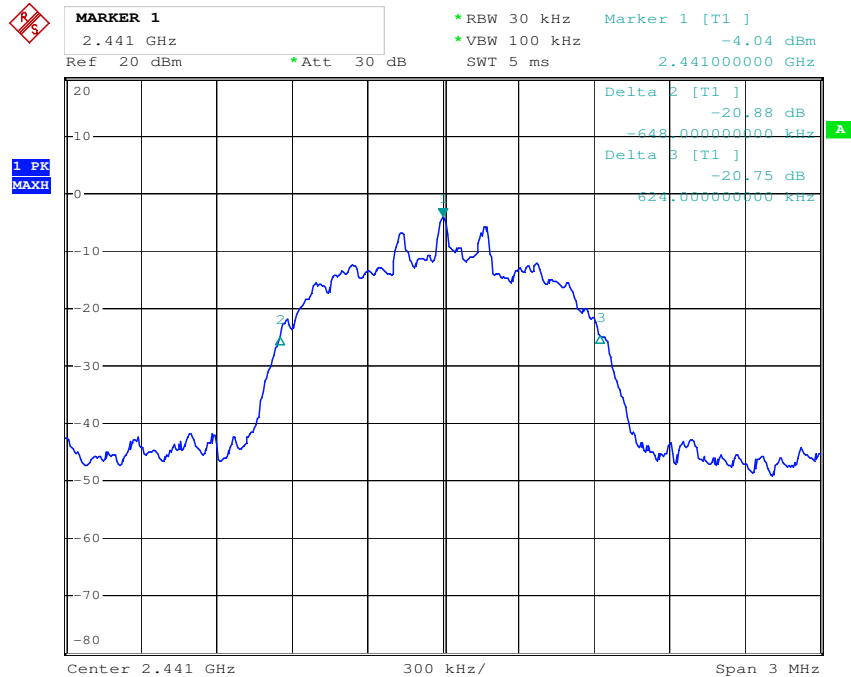


Modulation: 8 DPSK
Tx frequency: 2480MHz

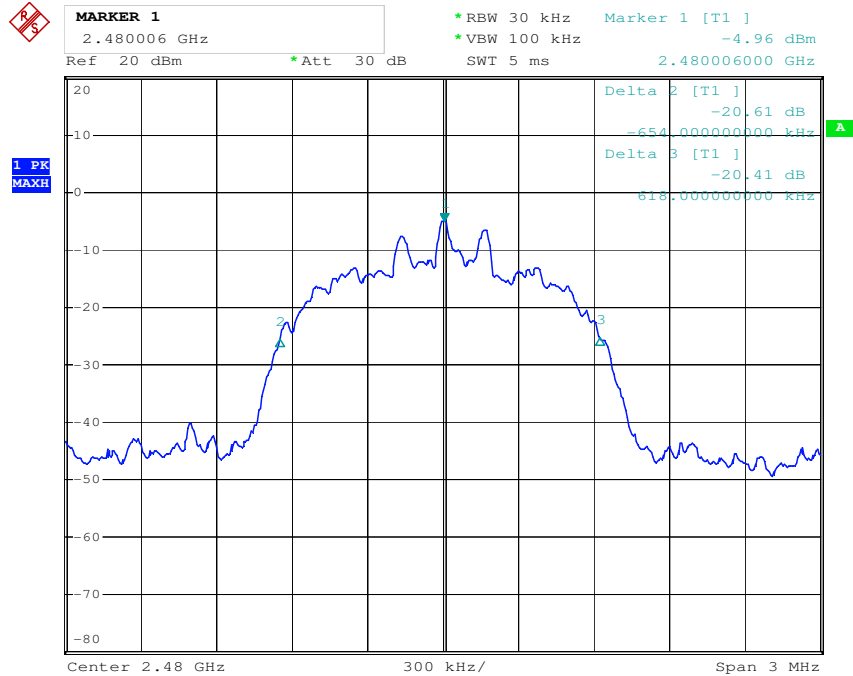


Date: 28.APR.2011 15:35:46

Modulation: GFSK
Tx frequency: 2402MHz

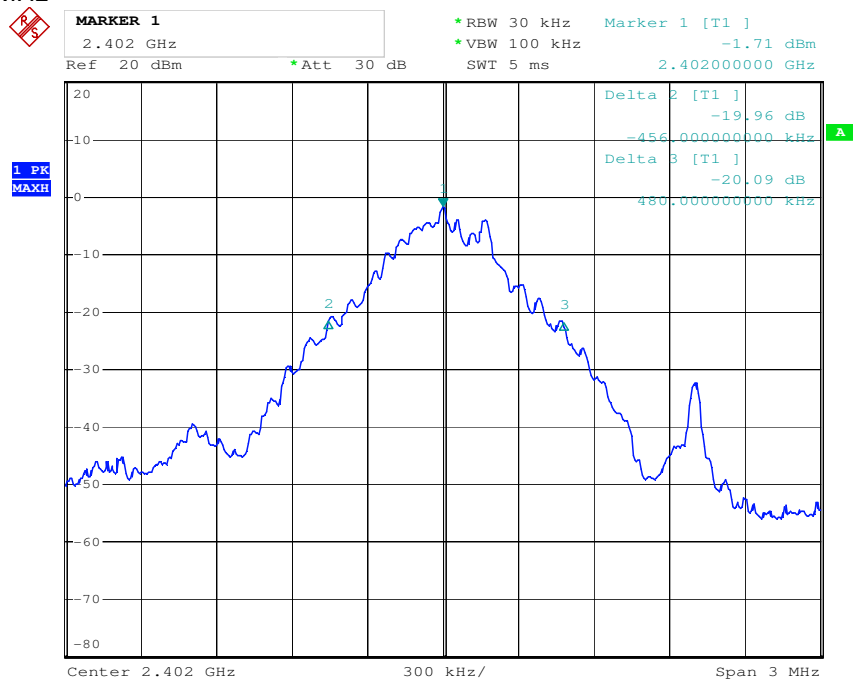


Date: 28.APR.2011 15:28:49

Modulation: GFSK
Tx frequency: 2441MHz

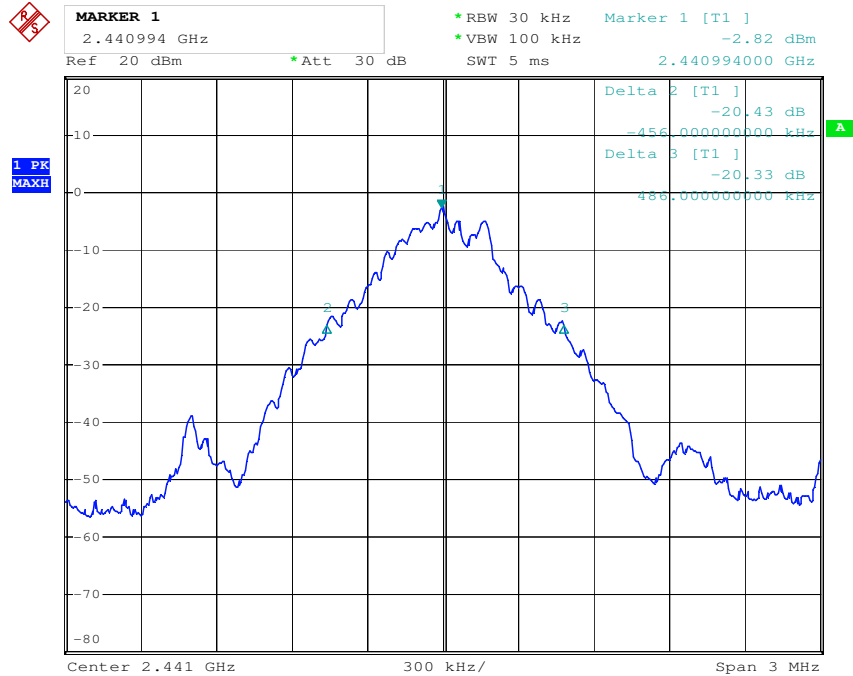

Date: 28.APR.2011 15:30:54

Modulation: GFSK
Tx frequency: 2480MHz

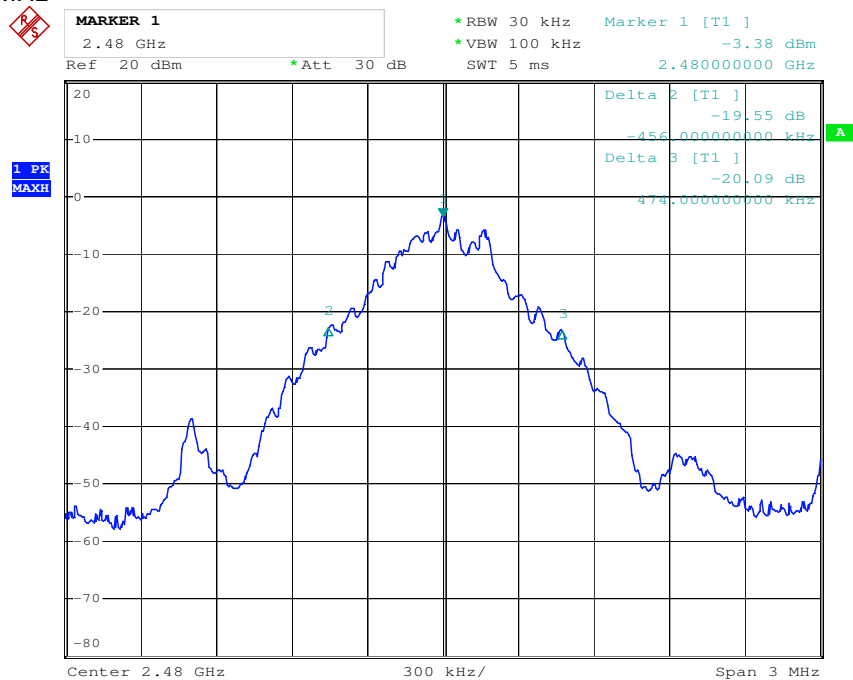


Date: 28.APR.2011 15:31:49

Peak Output Power


Modulation: GFSK

Tx frequency: 2402MHz

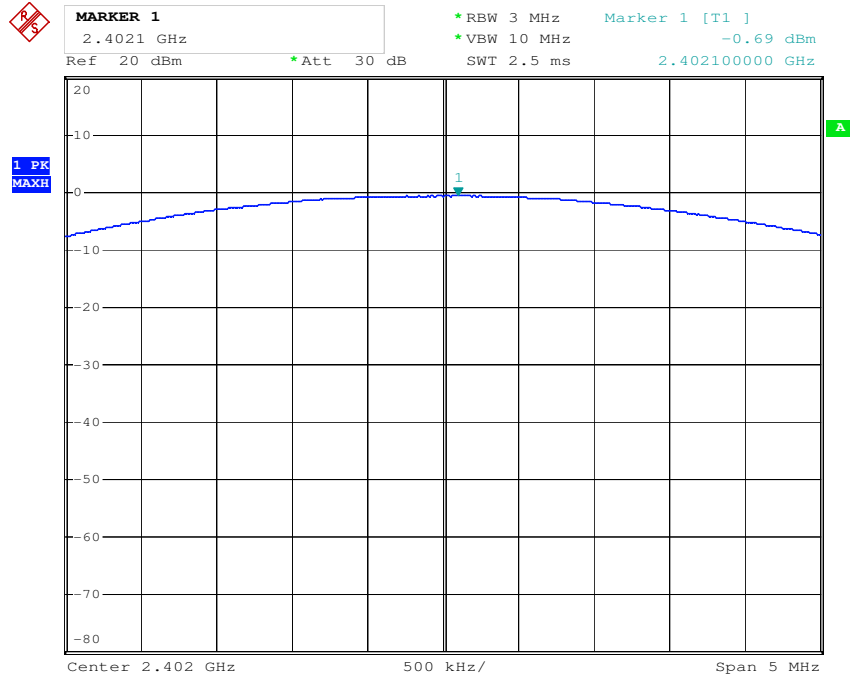


Modulation: GFSK

Tx frequency: 2441MHz

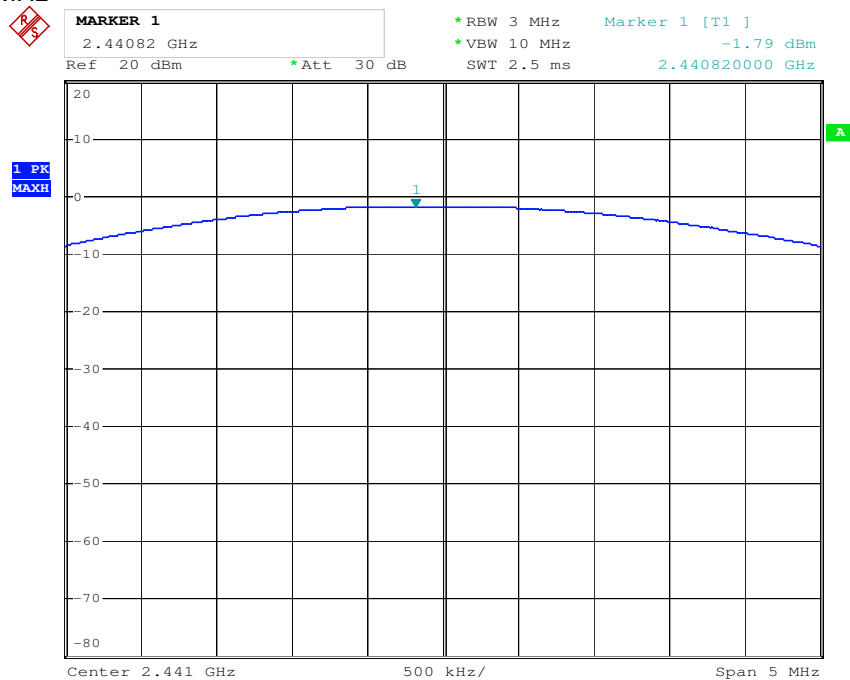


Modulation: GFSK
Tx frequency: 2480MHz

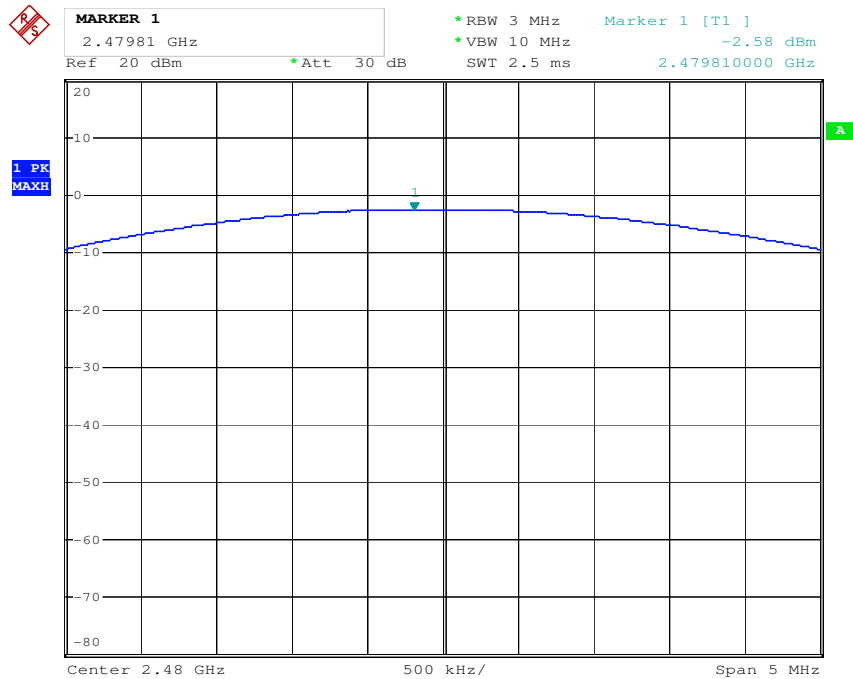


Date: 28.APR.2011 15:56:59

Modulation: Pi/4 DQPSK
Tx frequency: 2402MHz

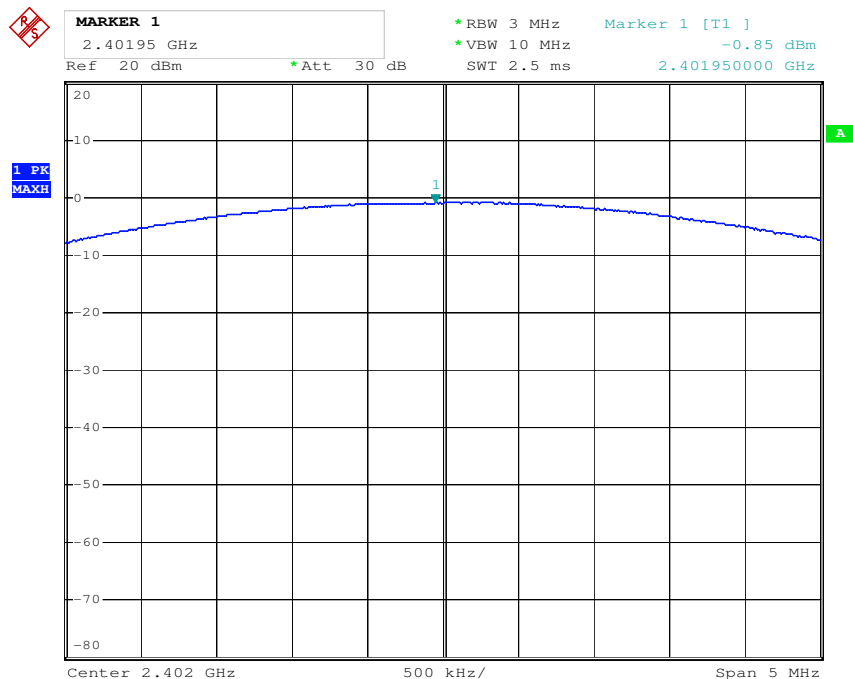


Date: 28.APR.2011 15:42:43

Modulation: Pi/4 DQPSK
Tx frequency: 2441MHz

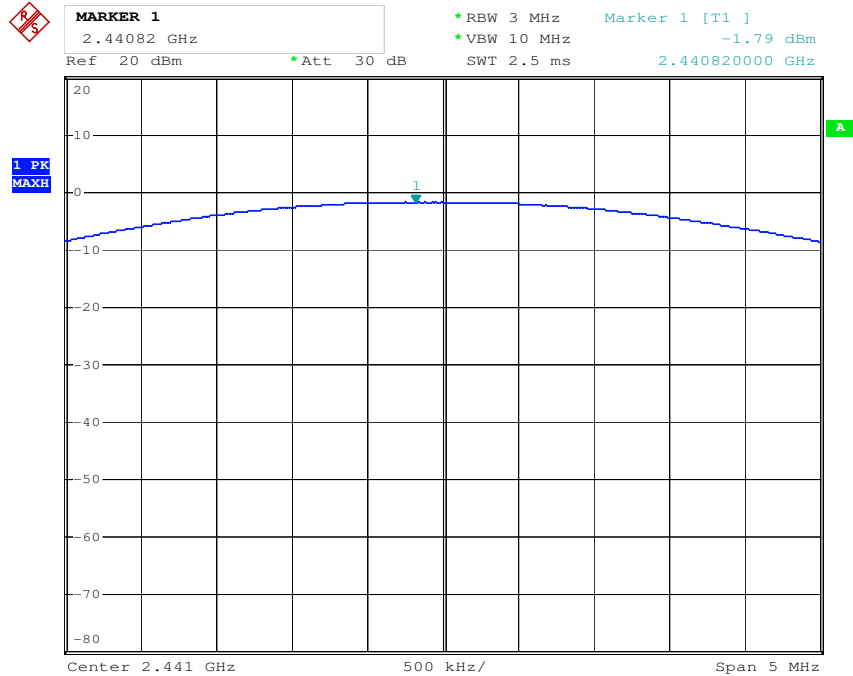


Date: 28.APR.2011 15:46:36

Modulation: Pi/4 DQPSK
Tx frequency: 2480MHz

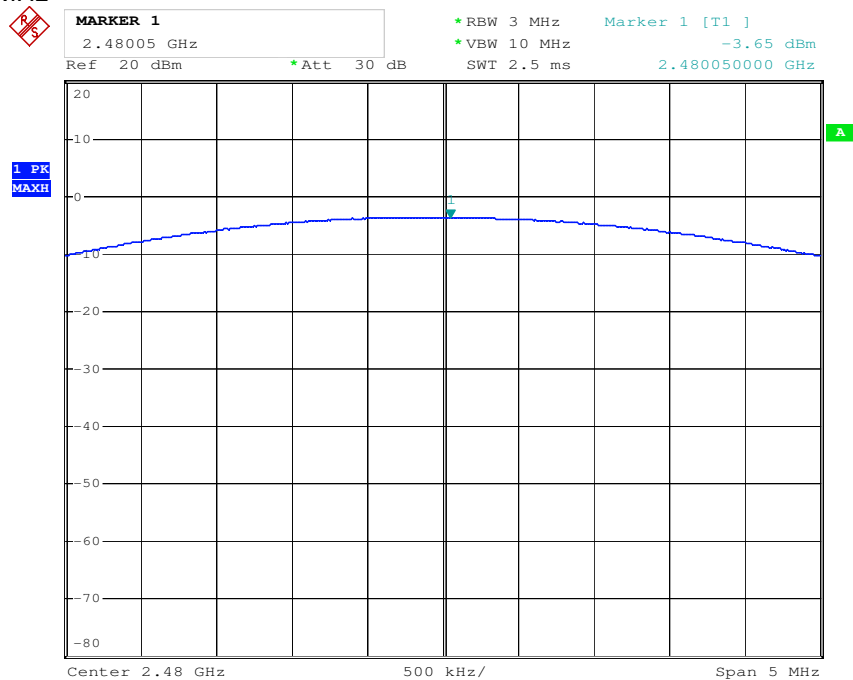


Date: 28.APR.2011 15:54:39

Modulation: 8 DPSK
Tx frequency: 2402MHz

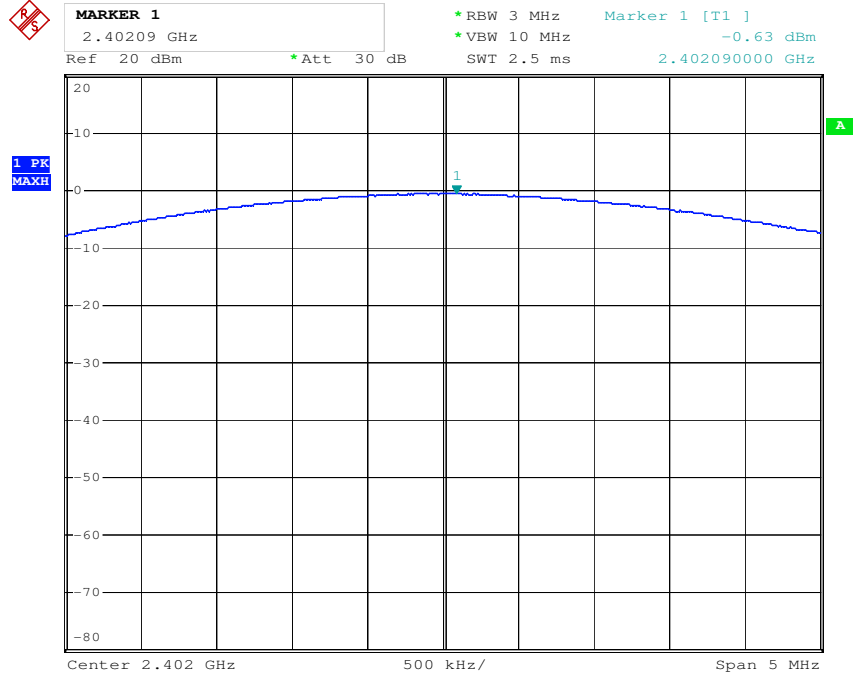


Date: 28.APR.2011 15:41:24

Modulation: 8 DPSK
Tx frequency: 2441MHz

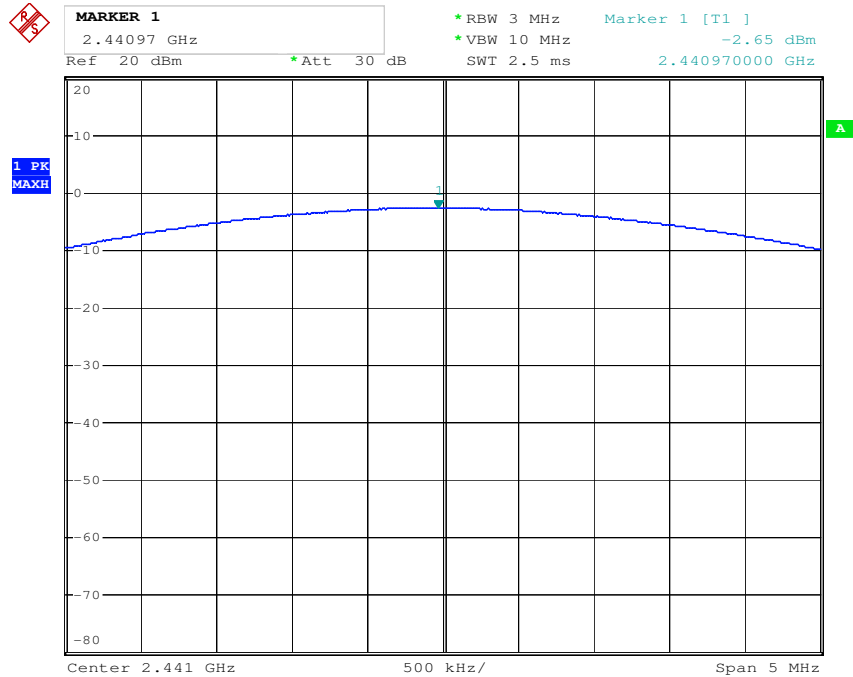

Date: 28.APR.2011 15:51:22


Modulation: 8 DPSK
Tx frequency: 2480MHz

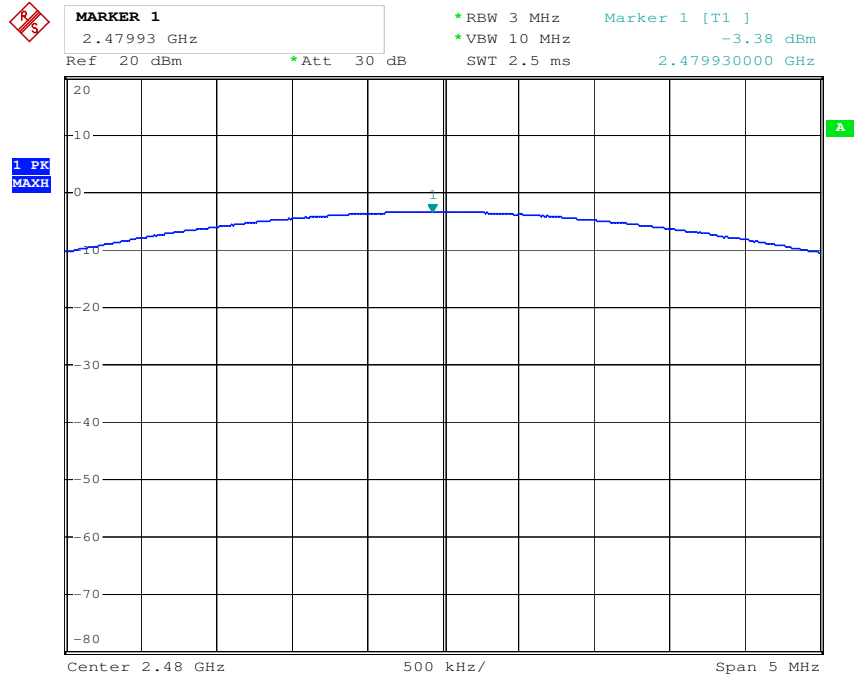

Date: 28.APR.2011 15:53:13


Band Edge Compliance

Tx frequency: 2402MHz (conducted measurement; hopping on)

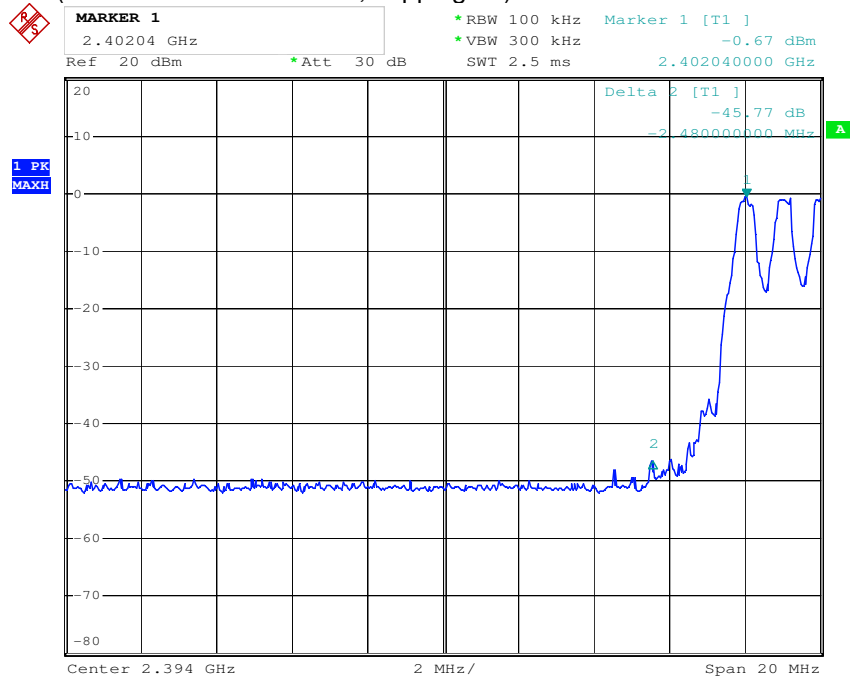


Date: 28.APR.2011 16:15:33

Tx frequency: 2480MHz (conducted measurement; hopping on)

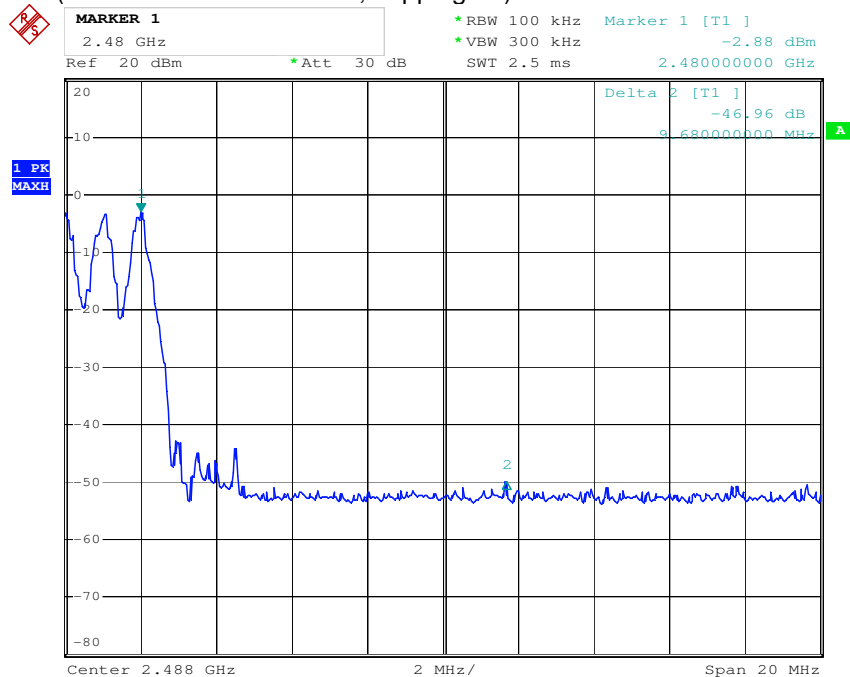


Date: 28.APR.2011 16:17:58

Tx frequency: 2402MHz (conducted measurement; hopping off)

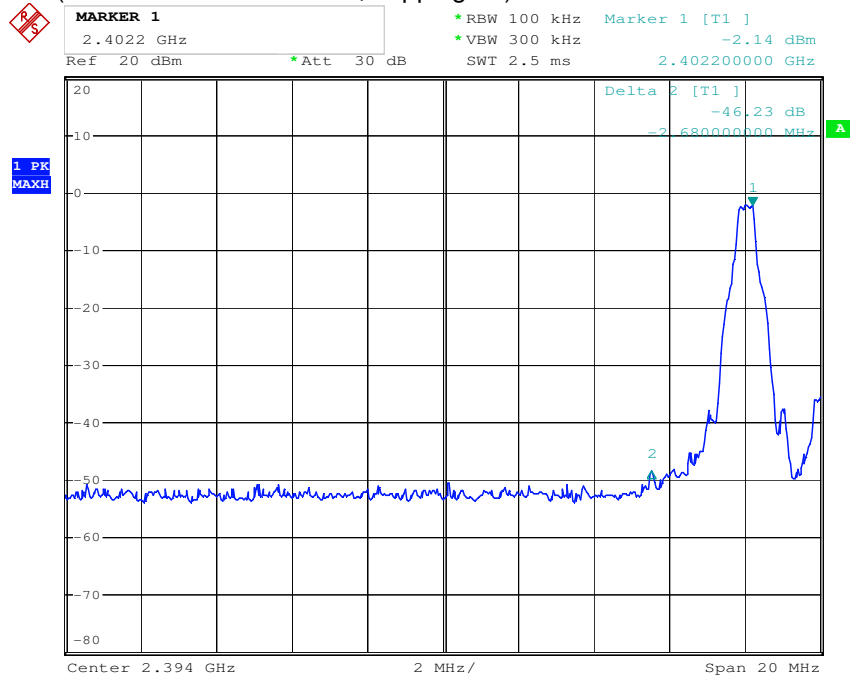

Date: 28.APR.2011 16:01:07

Tx frequency: 2480MHz (conducted measurement; hopping off)

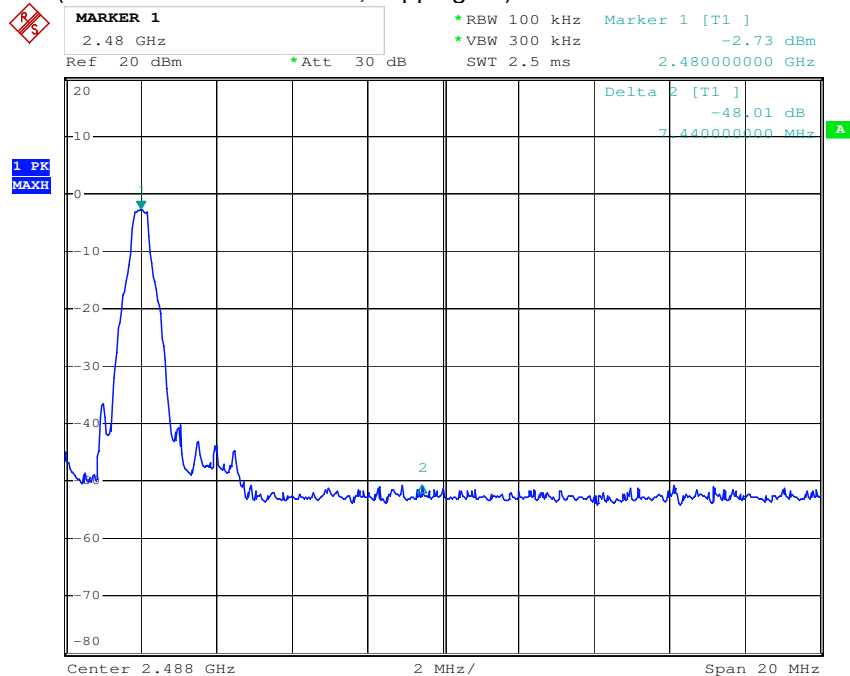

Date: 28.APR.2011 16:19:11

Tx frequency: 2402MHz (radiated measurement)

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer:	GN
Test Item:	
Identification:	OTE7
Test Standard:	FCC Part 15
Test Detail:	Band edge
Operation Mode:	Tx @ Low channel(EDR)
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq:	DC 3.7V by li-ion battery
Receipt No:	
Report No:	
Result:	Pass
Comment:	Test distance is 3m, Vertical
Subrange 1	
Frequency Range:	2GHz-3GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF906/ TUV FSP30-TUV SAC HF906

Pre TUV 1 to 18G HF906

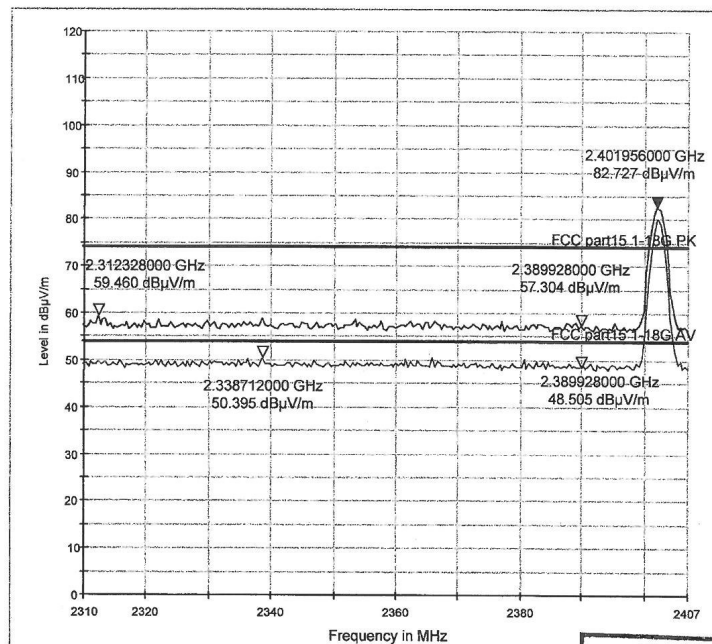

Sign-off Test Data

Date: 20/04/2011 - Time: 18:37:12

Tested by:



Reviewed by:



TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: GN
Test Item:
Identification: OTE7
Test Standard: FCC Part 15
Test Detail: Band edge
Operation Mode: Tx @ Low channel(EDR)
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.7V by li-ion battery
Receipt No:
Report No:
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1
Frequency Range: 2GHz-3GHz
Receiver: TUV FSP30
Transducer: TUV SAC HF906/ TUV FSP30-TUV SAC HF906

Pre TUV 1 to 18G HF906

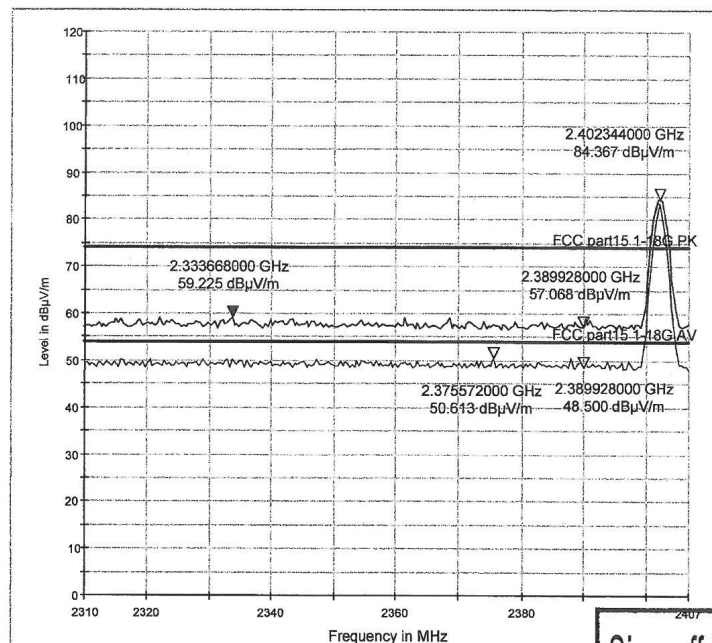

Sign-off Test Data

Date: 20/04/2011 - Time: 18:42:08

Tested by:  Reviewed by: 

Tx frequency: 2480MHz (radiated measurement)

TUV Rheinland (Guangdong) Ltd.


EMC Test Service Hotline: +86-20-28391188

EMC Test Record (Emission)

Common Information

Manufacturer:	GN
Test Item:	
Identification:	OTE7
Test Standard:	FCC Part 15
Test Detail:	Band edge
Operation Mode:	Tx @ High channel(EDR)
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq:	DC 3.7V by li-ion battery
Receipt No:	
Report No:	
Result:	Pass
Comment:	Test distance is 3m, Vertical
Subrange 1	
Frequency Range:	2GHz-3GHz
Receiver:	TUV FSP30
Transducer:	TUV SAC HF906/ TUV FSP30-TUV SAC HF906

Pre TUV 1 to 18G HF906

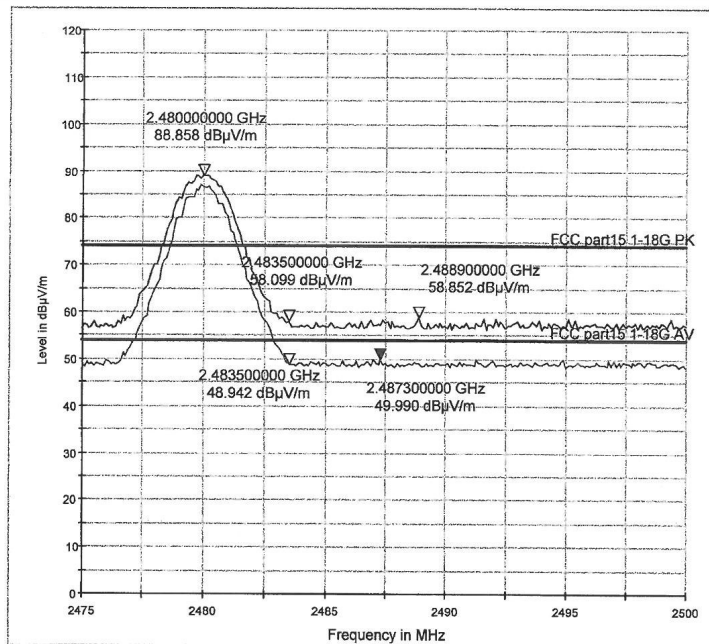

Sign-off Test Data

Date: 20/04/2011 - Time: 18:31:16

Tested by:  2011.4.21Reviewed by:  2011.4.29

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (Emission)

Common Information

Manufacturer: GN
Test Item:
Identification: OTE7
Test Standard: FCC Part 15
Test Detail: Band edge
Operation Mode: Tx @ High channel(EDR)
Climate Condition: 23 °C; 50 %RH; 101 kPa.
Test Voltage/ Freq: DC 3.7V by li-ion battery
Receipt No:
Report No:
Result: Pass
Comment: Test distance is 3m, Horizontal

Subrange 1
Frequency Range: 2GHz-3GHz
Receiver: TUV FSP30
Transducer: TUV SAC HF906/ TUV FSP30-TUV SAC HF906

Pre TUV 1 to 18G HF906

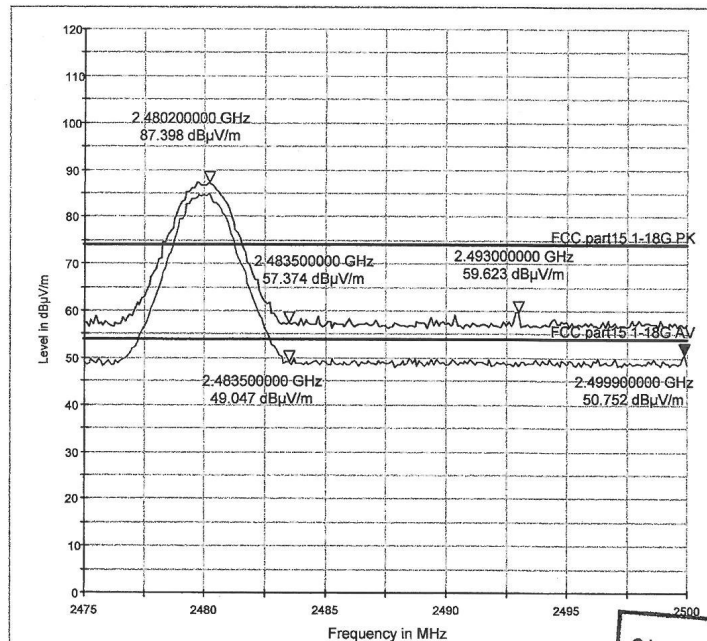


Sign-off Test Data

Date: 20/04/2011 - Time: 18:28:48

Tested by:  Reviewed by: 


Spurious Emissions - Conducted

Tx frequency: 2402MHz

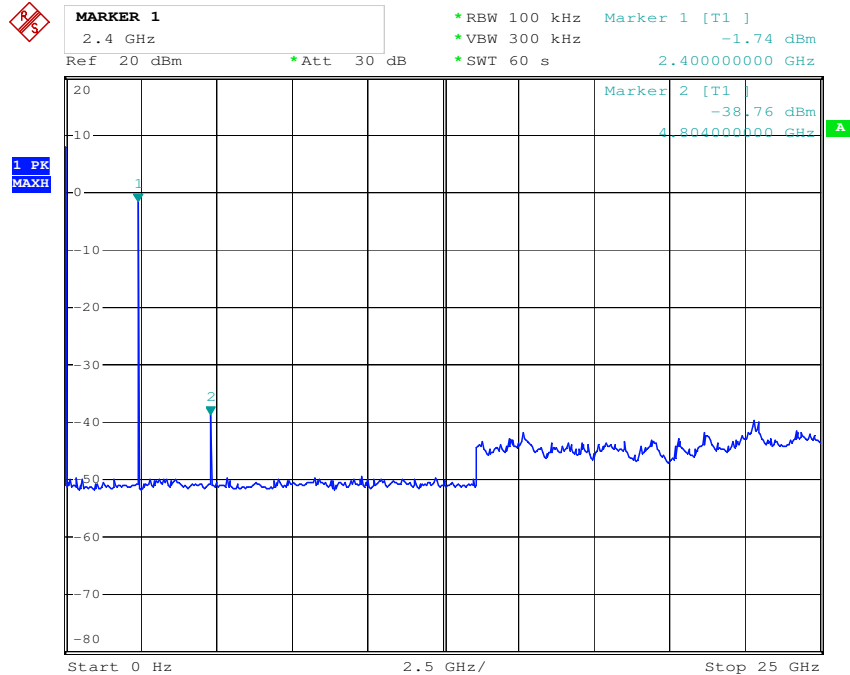


Date: 28.APR.2011 16:30:40

Tx frequency: 2441MHz

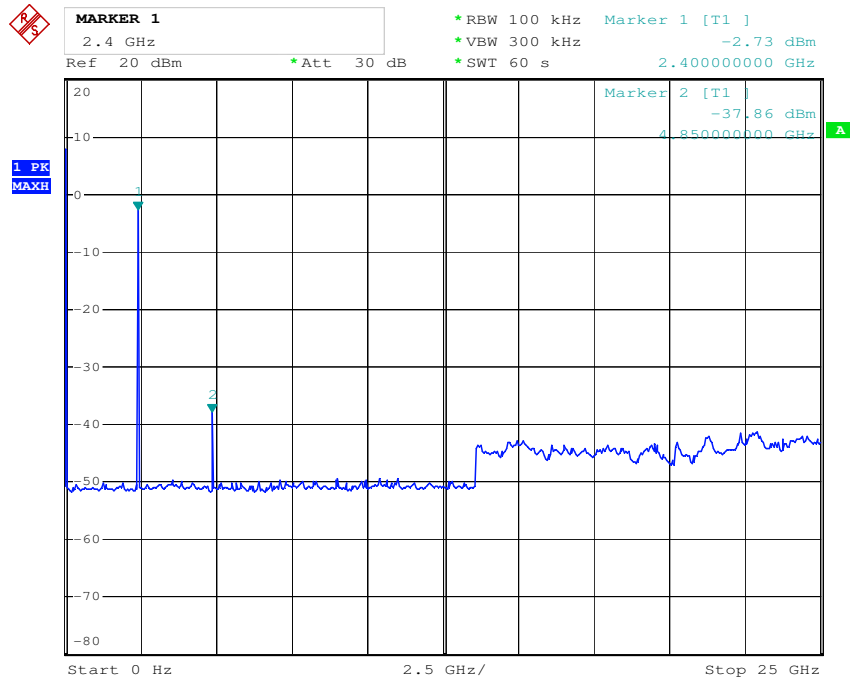

Date: 28.APR.2011 16:27:14


Tx frequency: 2480MHz

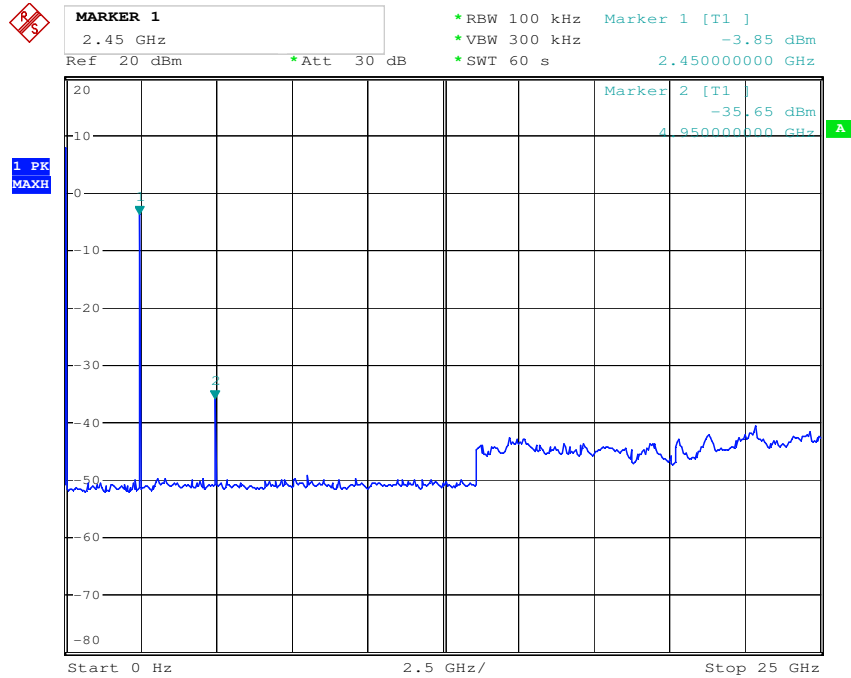

Date: 28.APR.2011 16:23:55

Appendix 2

Test Setup Photos

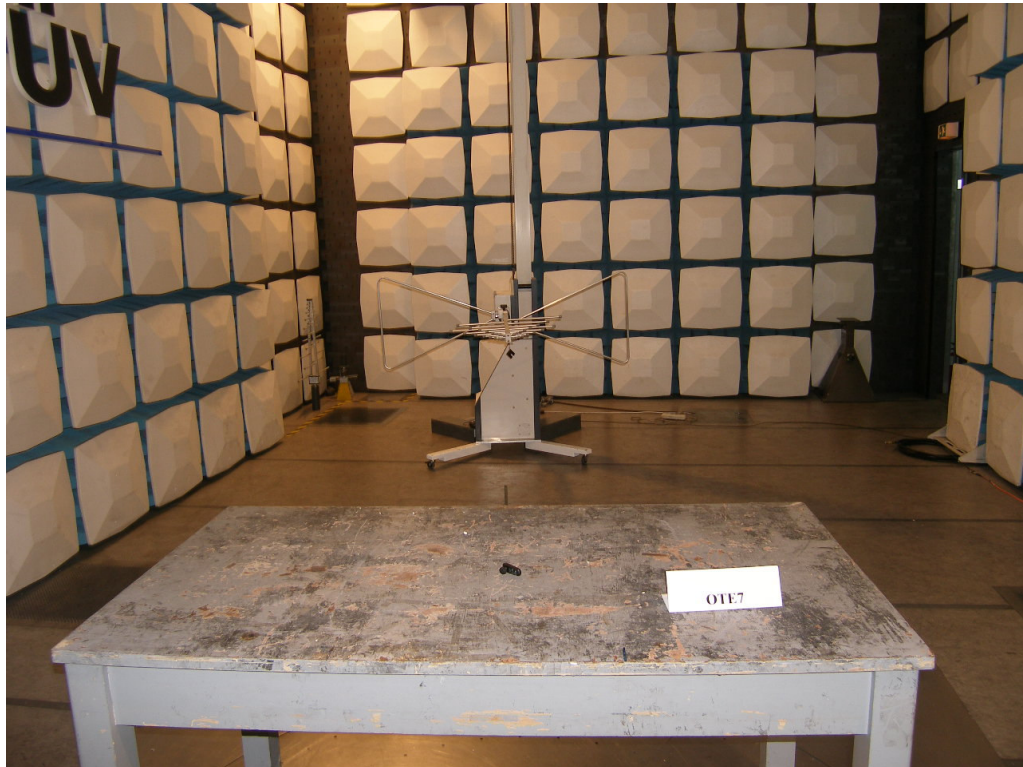

Set-up for Radiation Emission (Transceiver)

1.2 Operational Descriptions

1.2.1 Product Descriptions

The test item is a Bluetooth headset based on the Bluetooth technology.

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With the introduction of the enhanced data rate (EDR) feature, the data rates can be up to 3 Mb/s.

An increase in the peak data rate beyond the basic rate of 1 Mb/s is achieved by modulating the RF carrier using phase shift keying (PSK) techniques, resulting in an increase of two to three times the number of bits per symbol. The 2 Mb/s EDR packets use a Pi/4-DQPSK modulation and the 3 Mb/s EDR packets use 8DPSK modulation. The USB connector is for charging only, no data exchange supported.

1.2.2 Technical Background of the Wireless Technology

Bluetooth operates in the unlicensed ISM band at 2.4 GHz. A frequency hop transceiver is applied to combat interference and fading. A shaped, binary FM modulation is applied to minimize transceiver complexity. The symbol rate is 1 Ms/s. A slotted channel is applied with a nominal slot length of 625 μ s. For full duplex transmission, a Time-Division Duplex (TDD) scheme is used. On the channel, information is exchanged through packets. Each packet is transmitted on a different hop frequency. A packet nominally covers a single slot, but can be extended to cover up to five slots. The Bluetooth protocol uses a combination of circuit and packet switching. Slots can be reserved for synchronous packets. Bluetooth can support an asynchronous data channel, up to three simultaneous synchronous voice channels, or a channel which simultaneously supports asynchronous data and synchronous voice. Each voice channel supports a 64 kb/s synchronous (voice) channel in each direction. The asynchronous channel can support maximal 723.2 kb/s asymmetric (and still up to 57.6 kb/s in the return direction), or 433.9 kb/s symmetric. The Bluetooth system consists of a radio unit, a link control unit, and a support unit for link management and host terminal interface functions.