


Site: AC1	Time: 2020/04/24 - 14:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5590MHz with OAW-AP1361 (CDD Mode)	

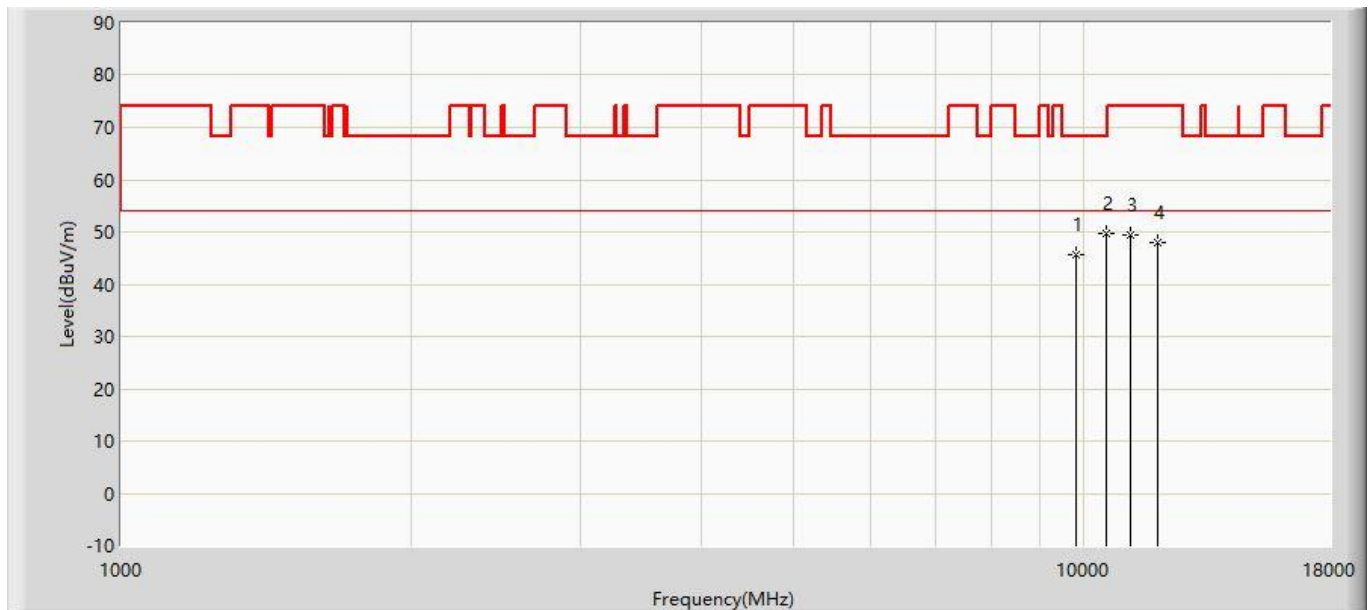


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	45.655	31.003	-22.545	68.200	14.652	PK
2		*	10562.500	49.803	32.844	-18.397	68.200	16.959	PK
3			11191.500	49.344	31.584	-24.656	74.000	17.760	PK
4			11939.500	48.112	30.264	-25.888	74.000	17.848	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5590MHz with OAW-AP1361 (CDD Mode)	

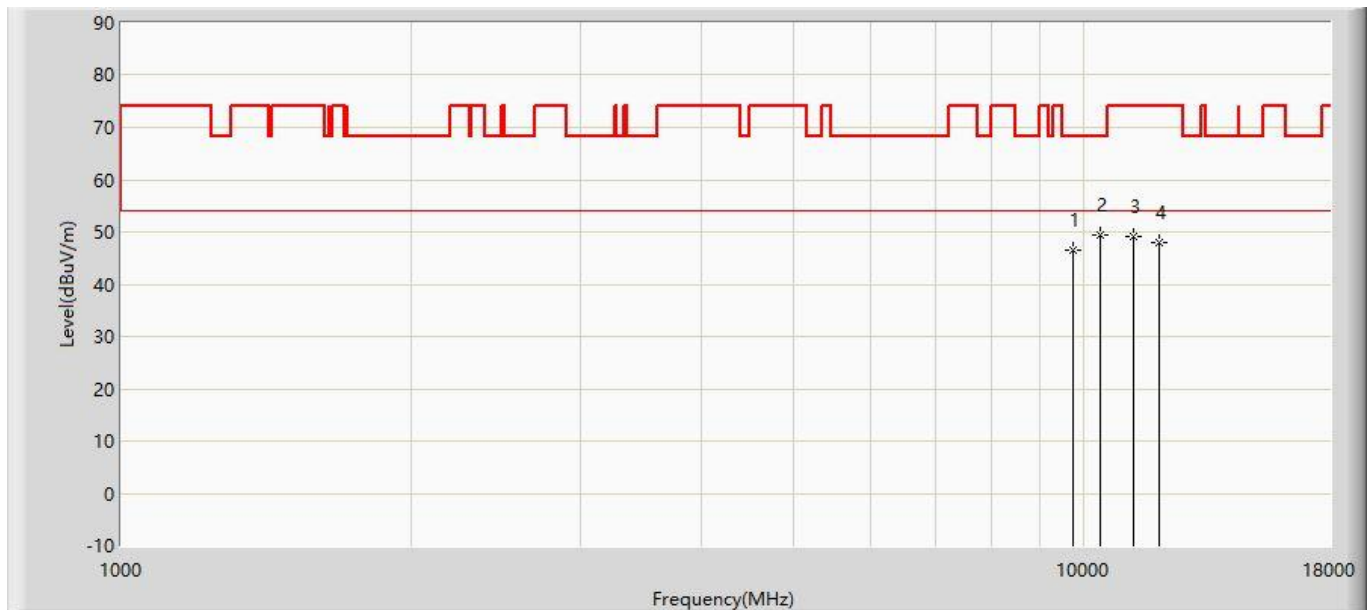


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	46.406	31.977	-21.794	68.200	14.428	PK
2		*	10401.000	49.427	32.876	-18.773	68.200	16.551	PK
3			11268.000	49.133	31.301	-24.867	74.000	17.832	PK
4			11948.000	48.031	30.187	-25.969	74.000	17.844	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with OAW-AP1361 (CDD Mode)	

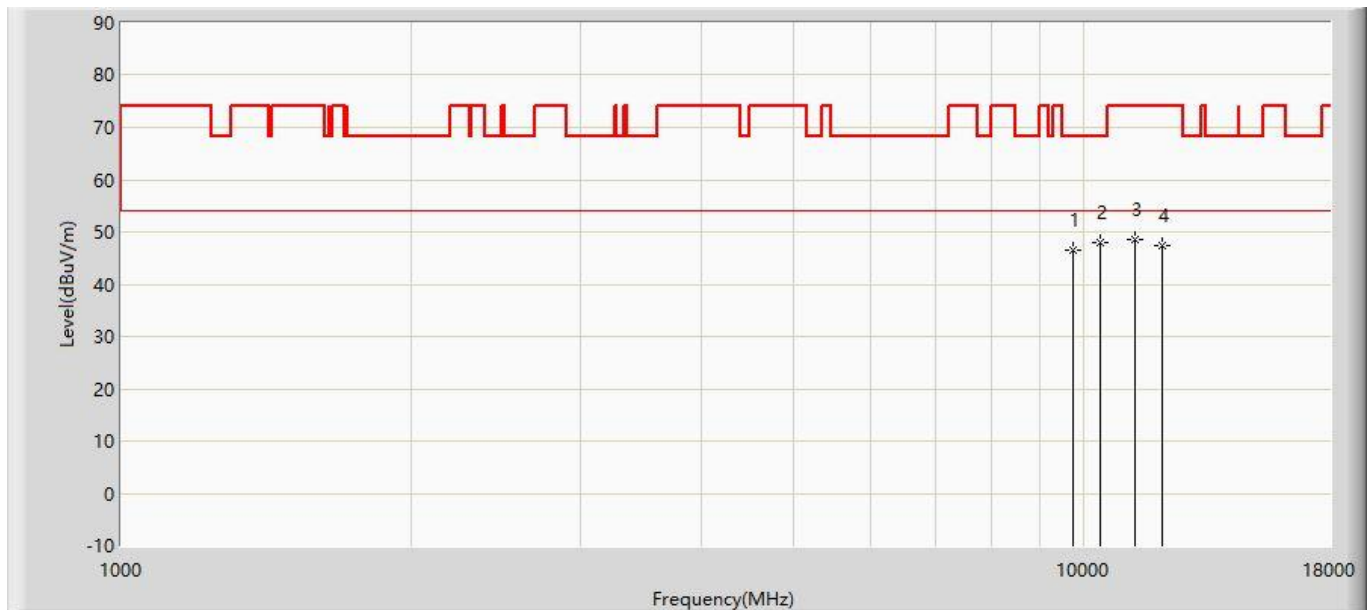


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	46.585	32.184	-21.615	68.200	14.401	PK
2		*	10375.500	48.081	31.612	-20.119	68.200	16.470	PK
3			11276.500	48.658	30.818	-25.342	74.000	17.840	PK
4			12050.000	47.340	29.522	-26.660	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with OAW-AP1361 (CDD Mode)	

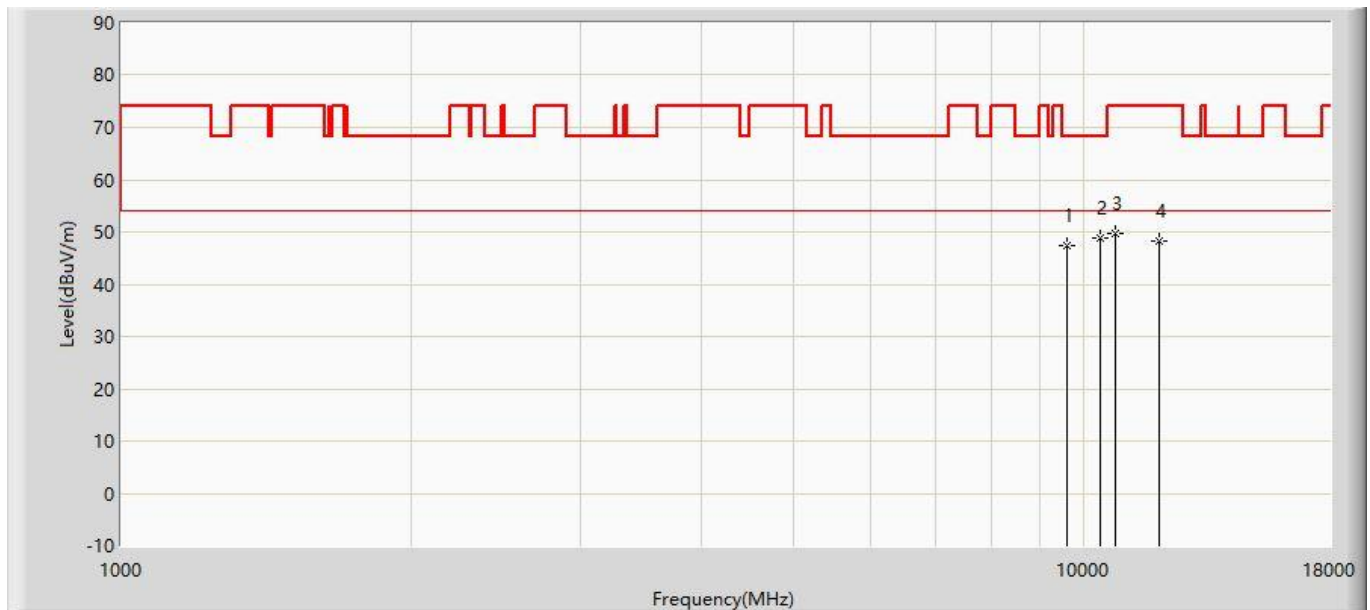


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9593.500	47.400	33.474	-20.800	68.200	13.926	PK
2		*	10375.500	48.733	32.264	-19.467	68.200	16.470	PK
3			10775.000	49.784	32.523	-24.216	74.000	17.261	PK
4			11948.000	48.383	30.539	-25.617	74.000	17.844	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5710MHz with OAW-AP1361 (CDD Mode)	

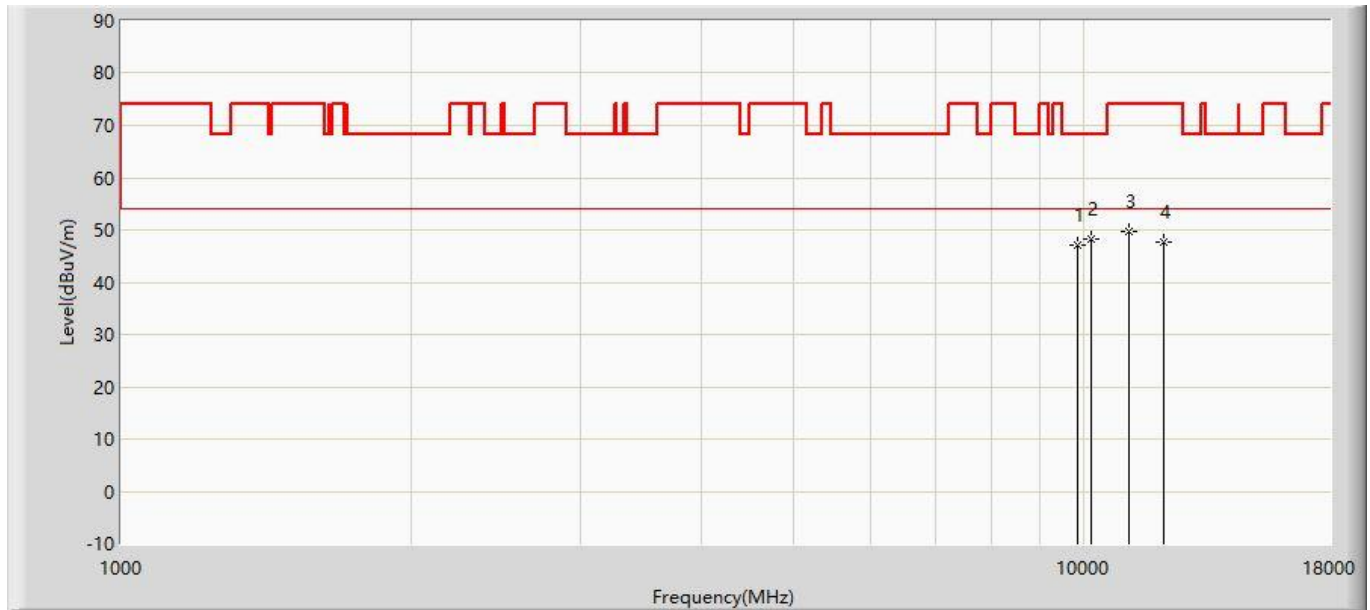


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9857.000	47.077	32.287	-21.123	68.200	14.790	PK
2		*	10188.500	48.237	32.370	-19.963	68.200	15.868	PK
3			11132.000	49.780	32.076	-24.220	74.000	17.704	PK
4			12092.500	47.668	29.851	-26.332	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5710MHz with OAW-AP1361 (CDD Mode)	

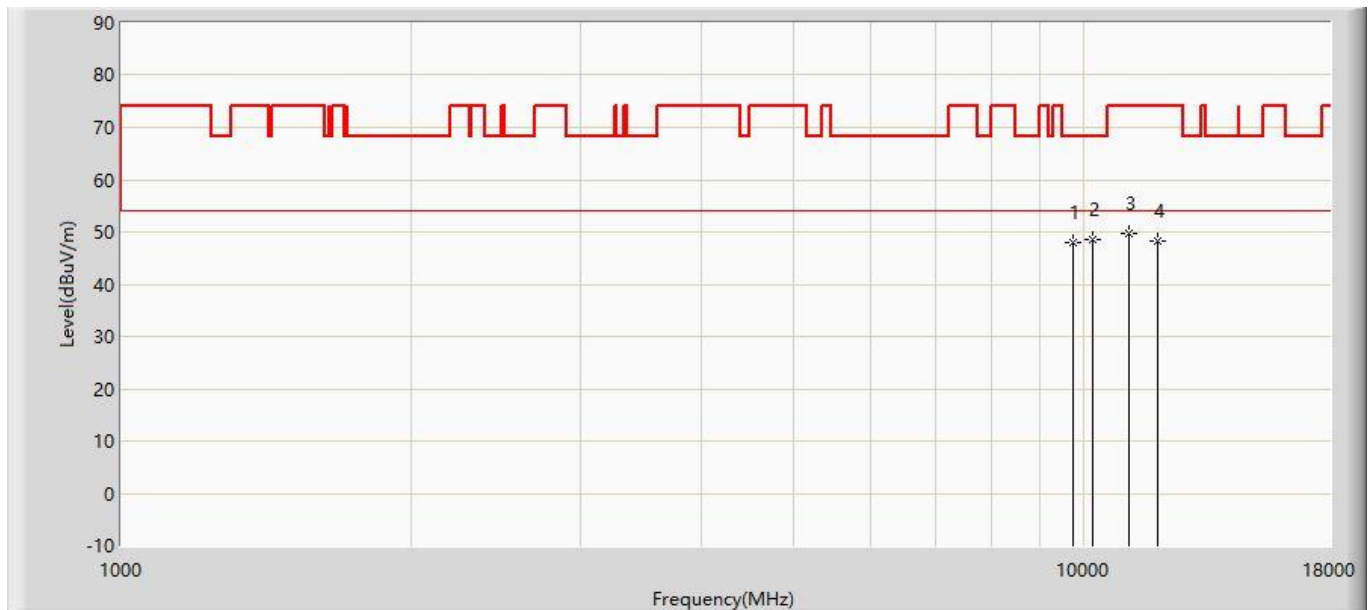


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	47.969	33.540	-20.231	68.200	14.428	PK
2		*	10214.000	48.415	32.466	-19.785	68.200	15.949	PK
3			11132.000	49.780	32.076	-24.220	74.000	17.704	PK
4			11931.000	48.256	30.405	-25.744	74.000	17.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz with OAW-AP1361 (CDD Mode)	

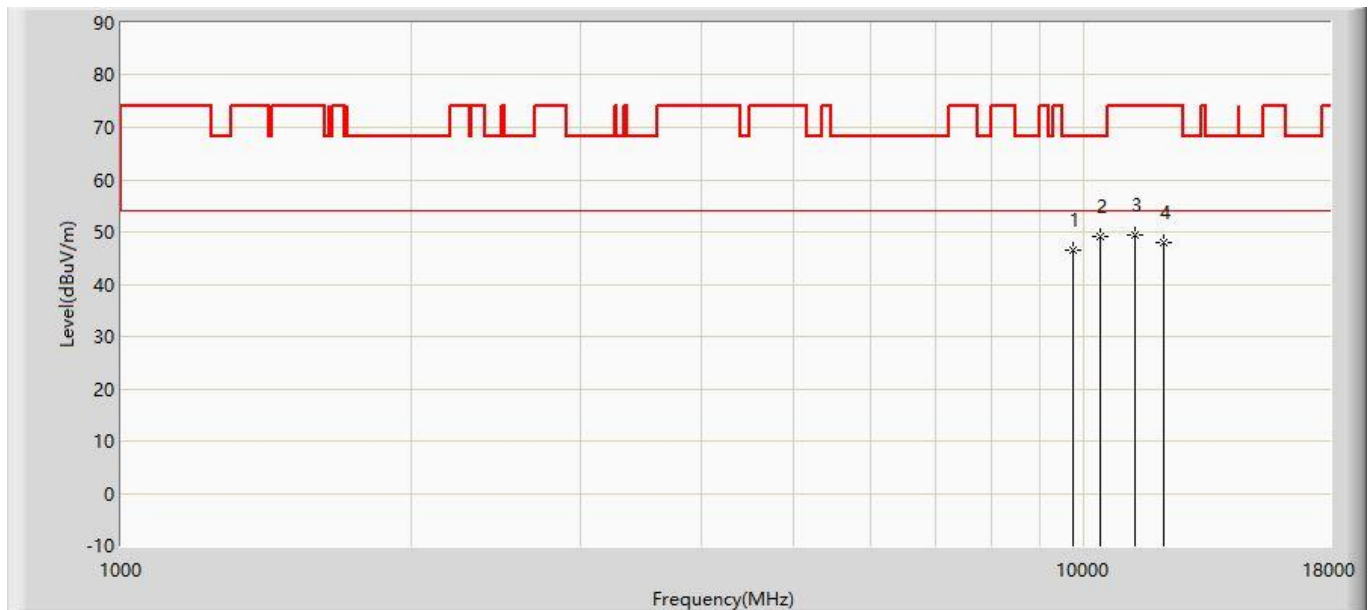


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	46.572	32.143	-21.628	68.200	14.428	PK
2		*	10375.500	49.135	32.666	-19.065	68.200	16.470	PK
3			11285.000	49.353	31.506	-24.647	74.000	17.847	PK
4			12118.000	47.930	30.114	-26.070	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz with OAW-AP1361 (CDD Mode)	

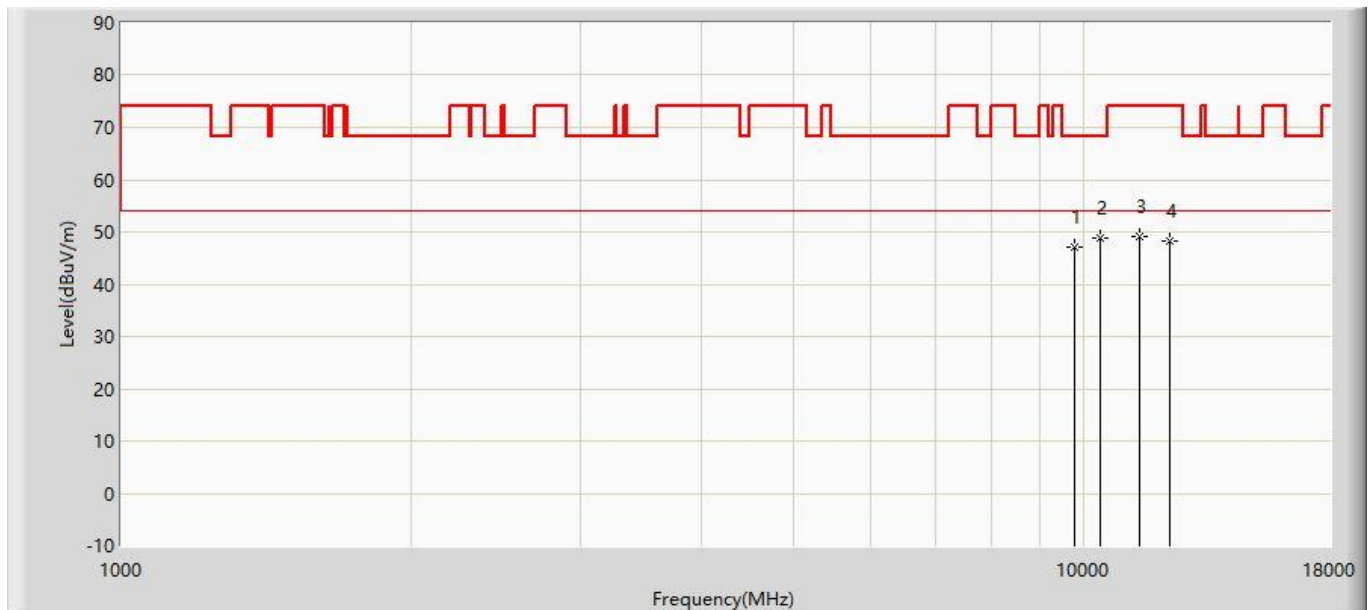


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	47.178	32.694	-21.022	68.200	14.485	PK
2		*	10384.000	48.746	32.250	-19.454	68.200	16.496	PK
3			11412.500	49.105	31.138	-24.895	74.000	17.966	PK
4			12288.000	48.351	30.540	-25.649	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz with OAW-AP1361 (CDD Mode)	

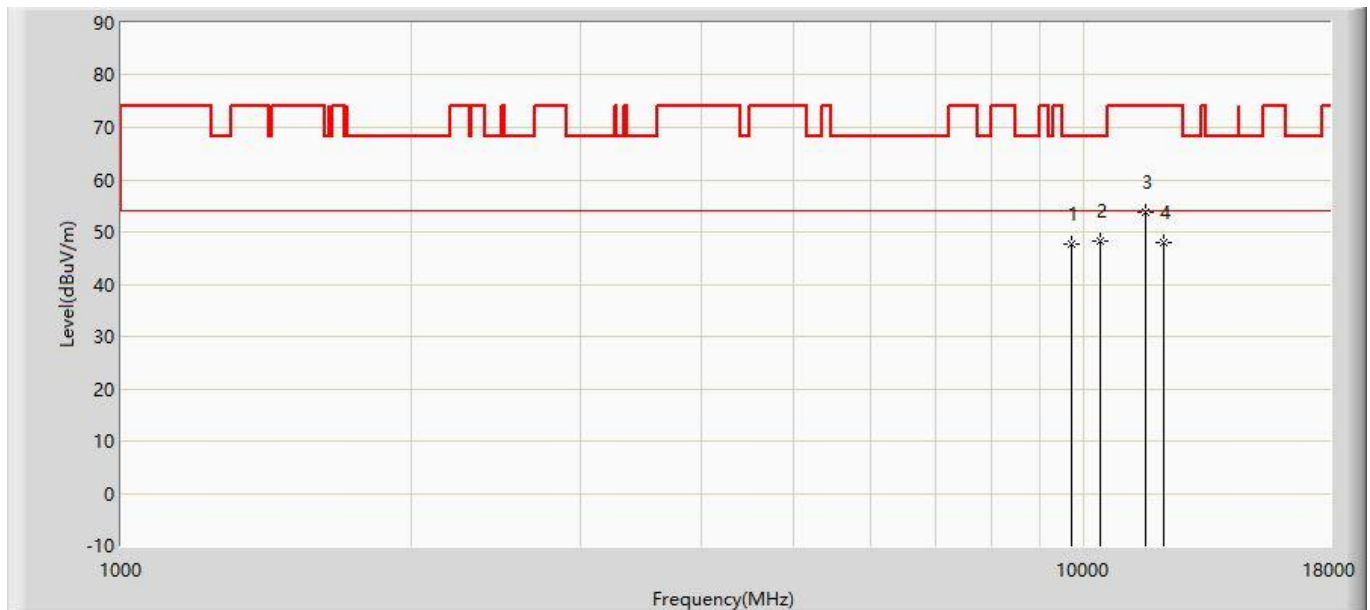


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	47.559	33.214	-20.641	68.200	14.345	PK
2		*	10375.500	48.253	31.784	-19.947	68.200	16.470	PK
3			11591.000	53.887	35.879	-20.113	74.000	18.008	PK
4			12109.500	47.966	30.150	-26.034	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz with OAW-AP1361 (CDD Mode)	

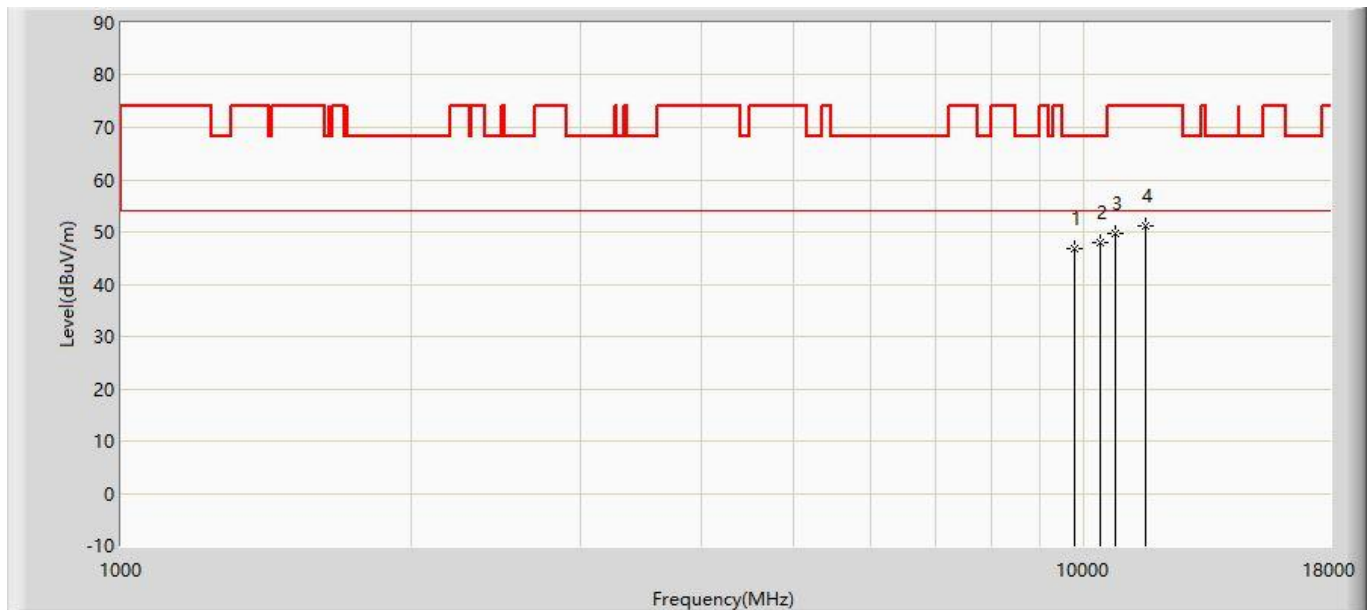


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	46.916	32.432	-21.284	68.200	14.485	PK
2		*	10401.000	48.059	31.508	-20.141	68.200	16.551	PK
3			10766.500	49.626	32.377	-24.374	74.000	17.249	PK
4			11591.000	51.058	33.050	-22.942	74.000	18.008	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

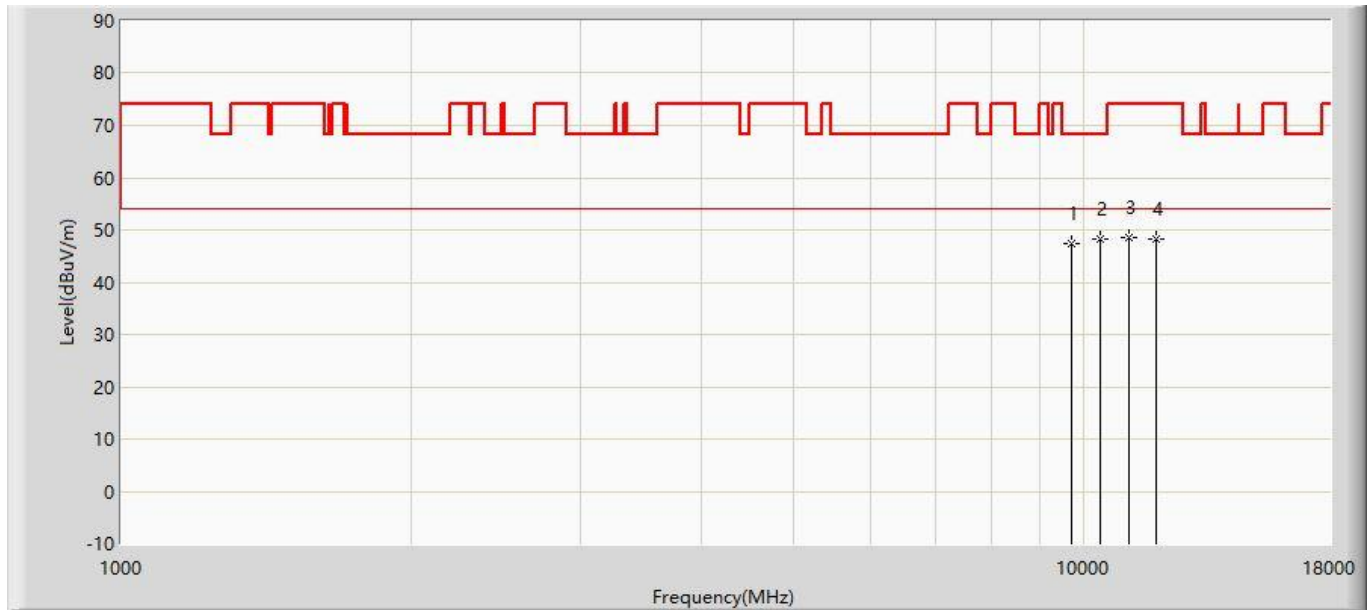


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	47.432	33.143	-20.768	68.200	14.289	PK
2		*	10375.500	48.266	31.797	-19.934	68.200	16.470	PK
3			11149.000	48.602	30.882	-25.398	74.000	17.720	PK
4			11871.500	48.250	30.371	-25.750	74.000	17.879	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

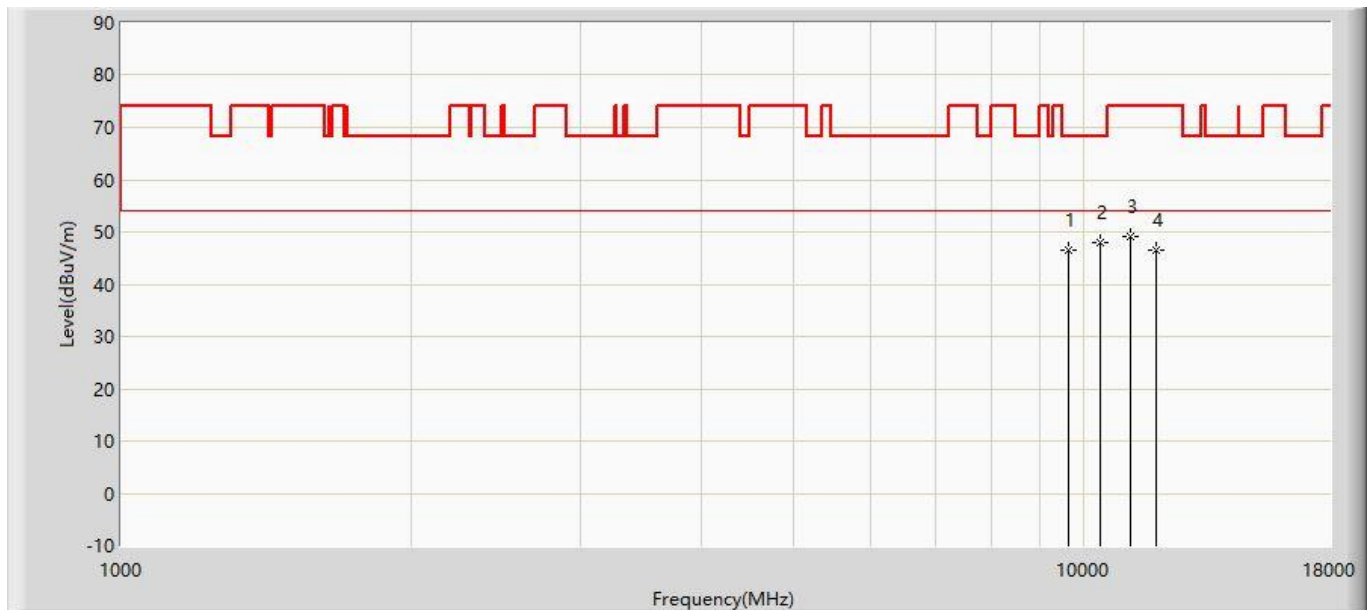


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9627.500	46.528	32.490	-21.672	68.200	14.038	PK
2		*	10384.000	47.995	31.499	-20.205	68.200	16.496	PK
3			11174.500	49.063	31.319	-24.937	74.000	17.743	PK
4			11871.500	46.469	28.590	-27.531	74.000	17.879	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5220MHz with OAW-AP1361 (CDD Mode)	

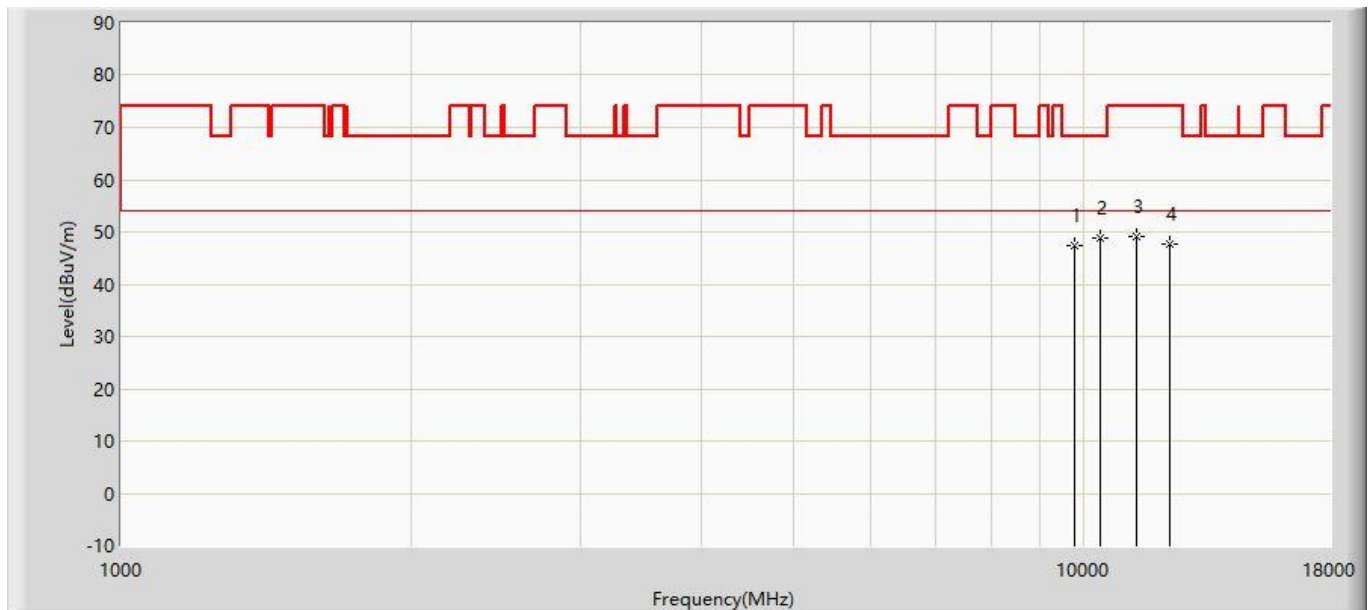


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	47.303	32.791	-20.897	68.200	14.512	PK
2		*	10384.000	48.908	32.412	-19.292	68.200	16.496	PK
3			11353.000	49.201	31.290	-24.799	74.000	17.911	PK
4			12279.500	47.667	29.856	-26.333	74.000	17.810	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5220MHz with OAW-AP1361 (CDD Mode)	

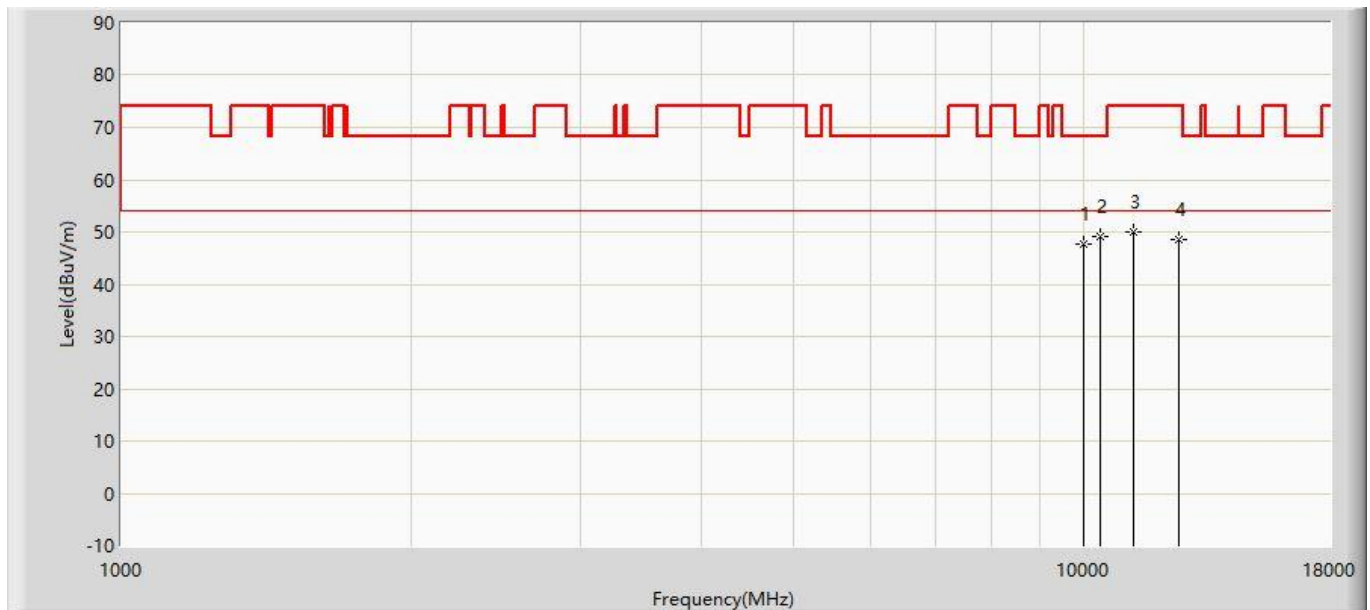


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9993.000	47.611	32.373	-20.589	68.200	15.238	PK
2		*	10401.000	49.216	32.665	-18.984	68.200	16.551	PK
3			11268.000	49.865	32.033	-24.135	74.000	17.832	PK
4			12534.500	48.659	30.765	-25.341	74.000	17.895	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5240MHz with OAW-AP1361 (CDD Mode)	

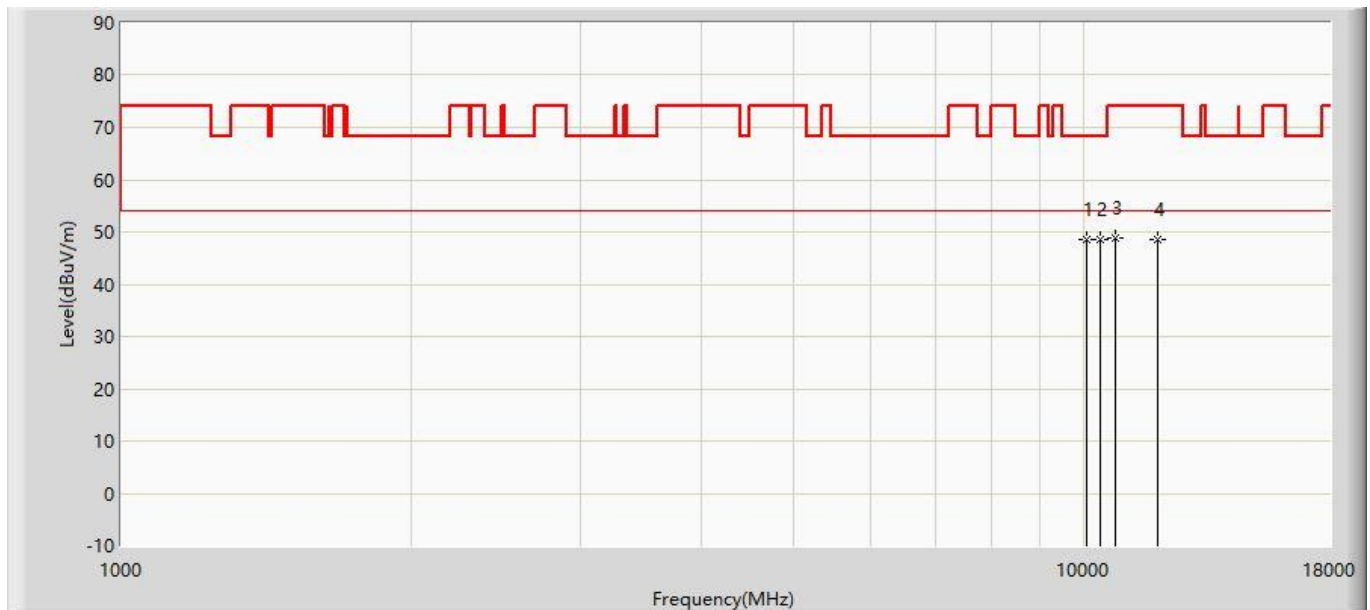


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	10044.000	48.571	33.170	-19.629	68.200	15.401	PK
2			10384.000	48.447	31.951	-19.753	68.200	16.496	PK
3			10775.000	48.928	31.667	-25.072	74.000	17.261	PK
4			11931.000	48.525	30.674	-25.475	74.000	17.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5240MHz with OAW-AP1361 (CDD Mode)	

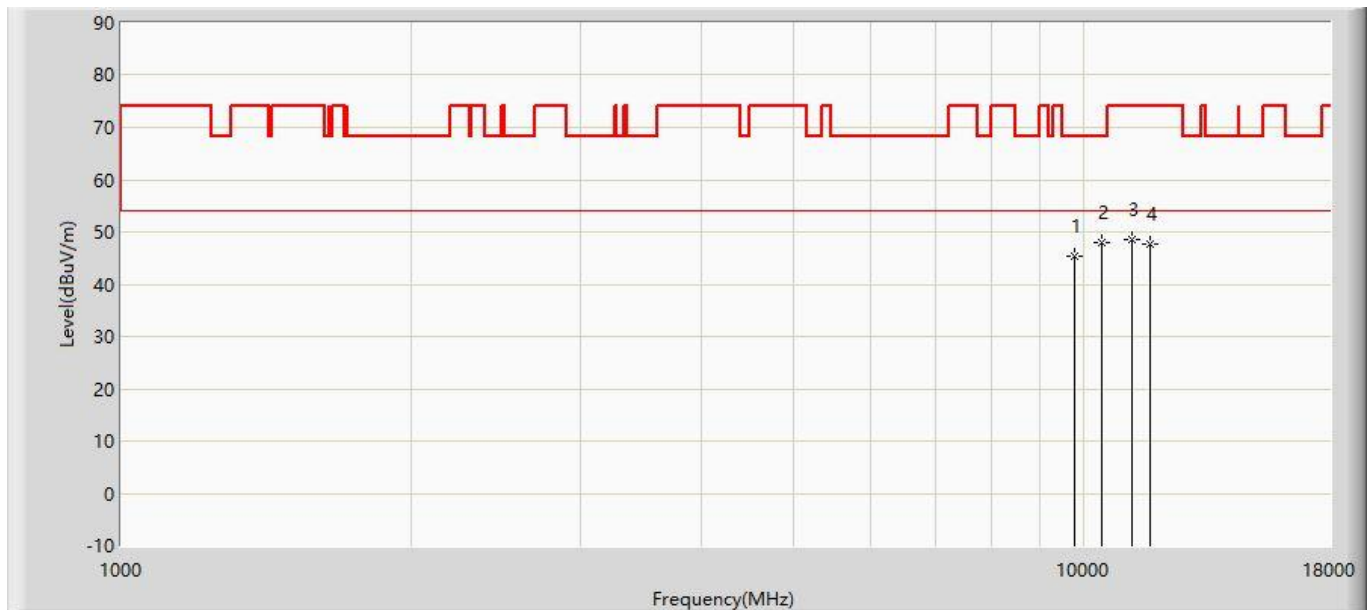


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	45.403	30.891	-22.797	68.200	14.512	PK
2		*	10443.500	47.975	31.287	-20.225	68.200	16.688	PK
3			11208.500	48.436	30.660	-25.564	74.000	17.777	PK
4			11727.000	47.613	29.668	-26.387	74.000	17.945	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5260MHz with OAW-AP1361 (CDD Mode)	

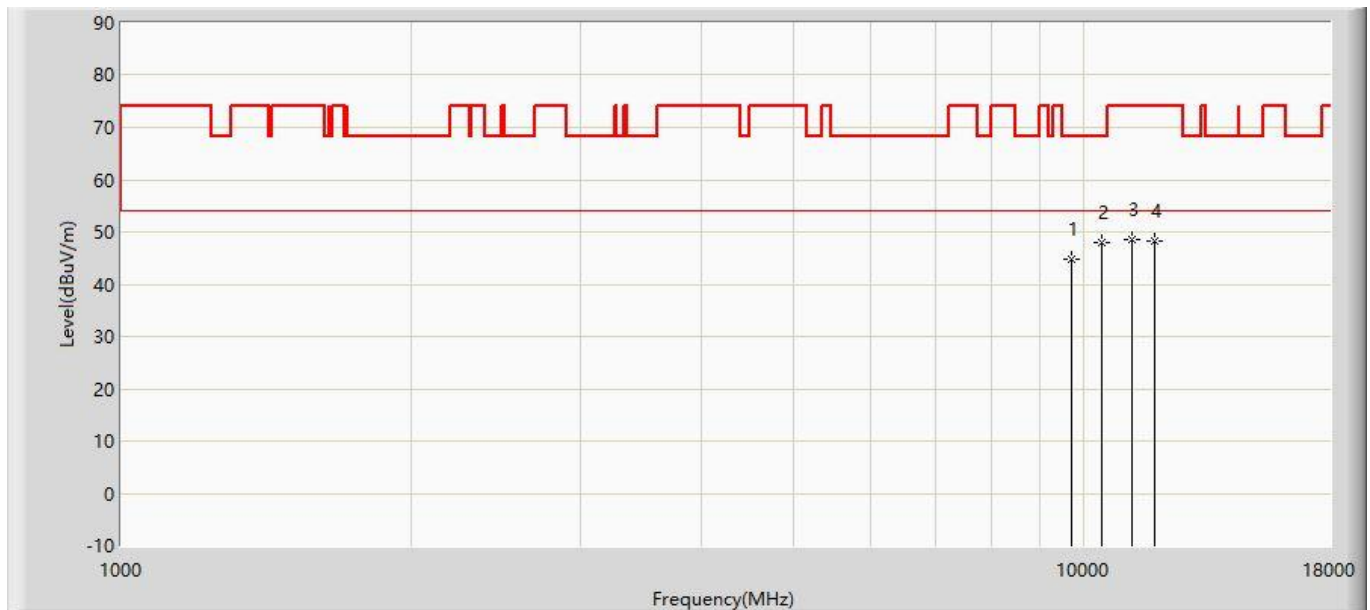


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	44.683	30.338	-23.517	68.200	14.345	PK
2		*	10443.500	47.975	31.287	-20.225	68.200	16.688	PK
3			11208.500	48.436	30.660	-25.564	74.000	17.777	PK
4			11829.000	48.297	30.398	-25.703	74.000	17.899	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5260MHz with OAW-AP1361 (CDD Mode)	

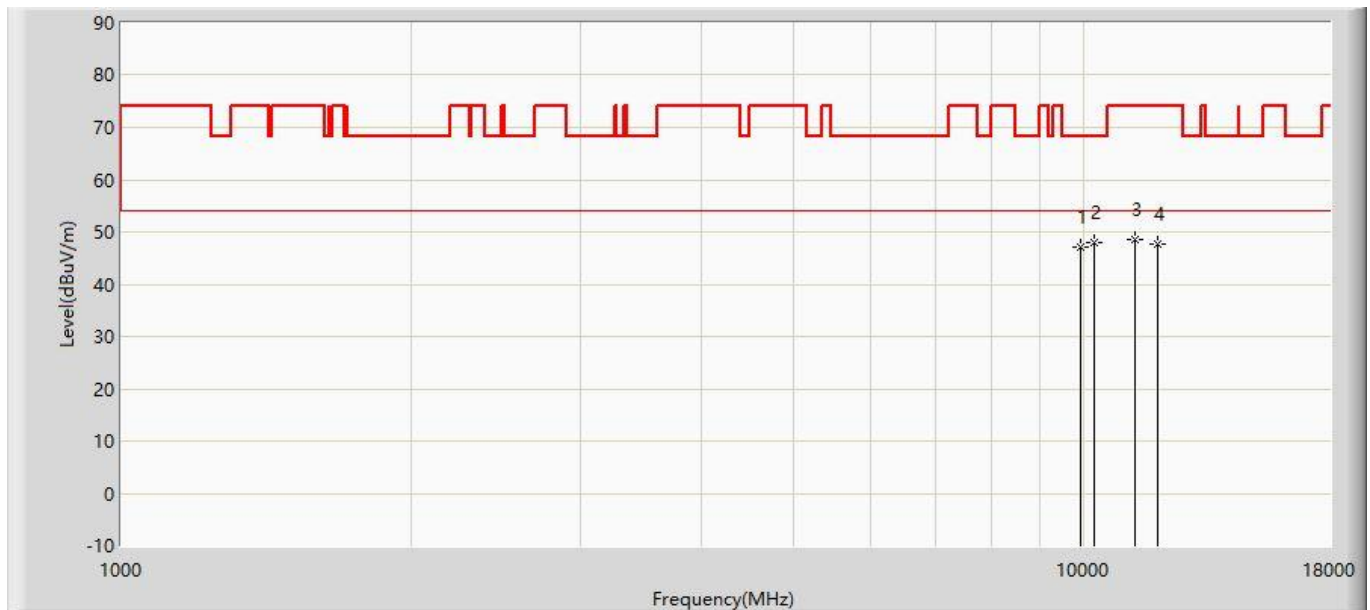


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9933.500	47.067	32.026	-21.133	68.200	15.041	PK
2		*	10248.000	47.984	31.925	-20.216	68.200	16.059	PK
3			11276.500	48.635	30.795	-25.365	74.000	17.840	PK
4			11905.500	47.736	29.872	-26.264	74.000	17.863	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5300MHz with OAW-AP1361 (CDD Mode)	

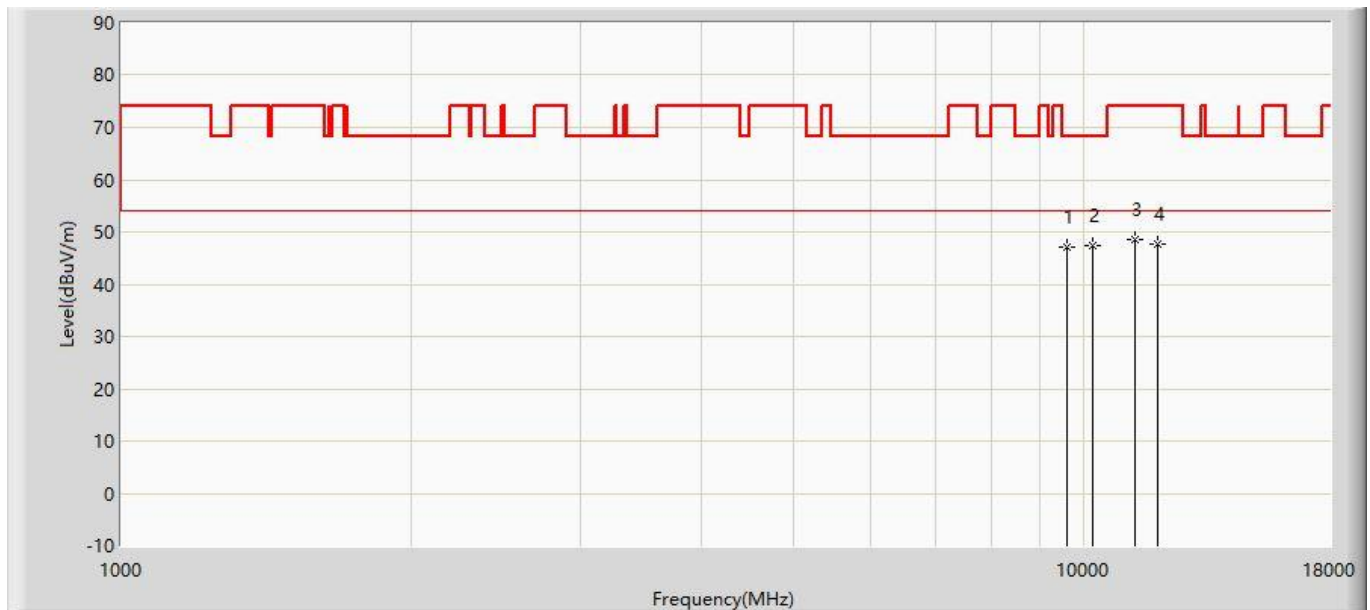


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9585.000	47.087	33.189	-21.113	68.200	13.898	PK
2		*	10197.000	47.459	31.565	-20.741	68.200	15.894	PK
3			11310.500	48.641	30.769	-25.359	74.000	17.873	PK
4			11905.500	47.736	29.872	-26.264	74.000	17.863	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5300MHz with OAW-AP1361 (CDD Mode)	

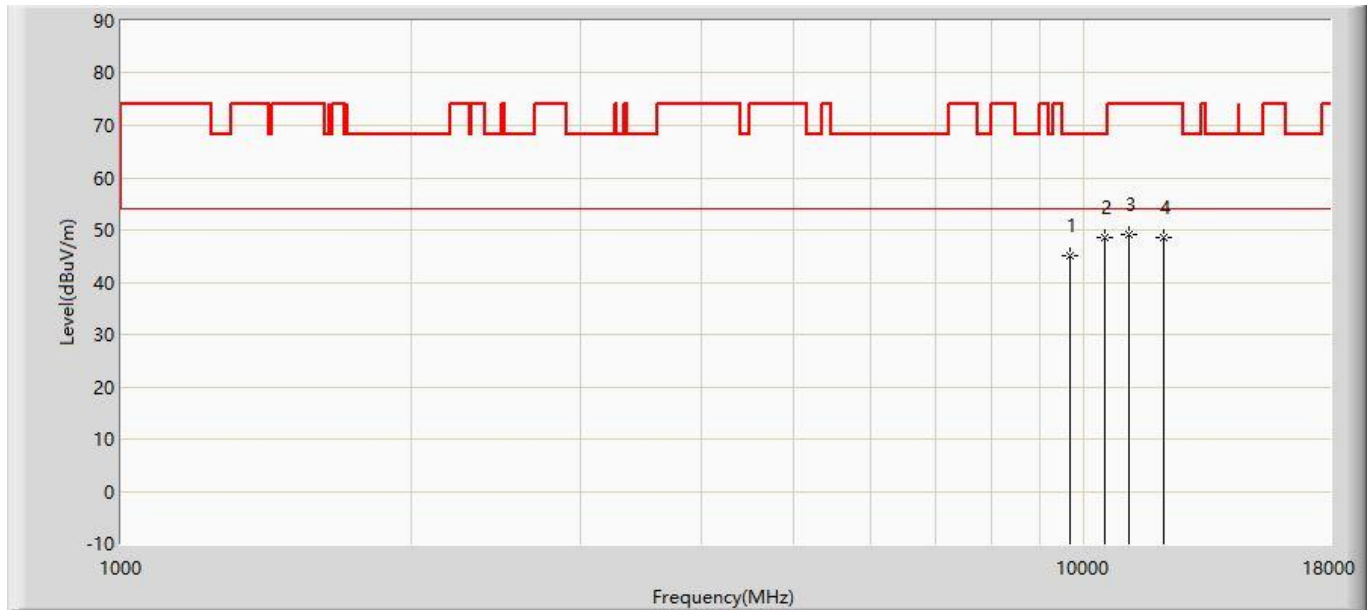


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9678.500	45.128	30.923	-23.072	68.200	14.205	PK
2		*	10520.000	48.499	31.601	-19.701	68.200	16.898	PK
3			11149.000	49.129	31.409	-24.871	74.000	17.720	PK
4			12109.500	48.422	30.606	-25.578	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

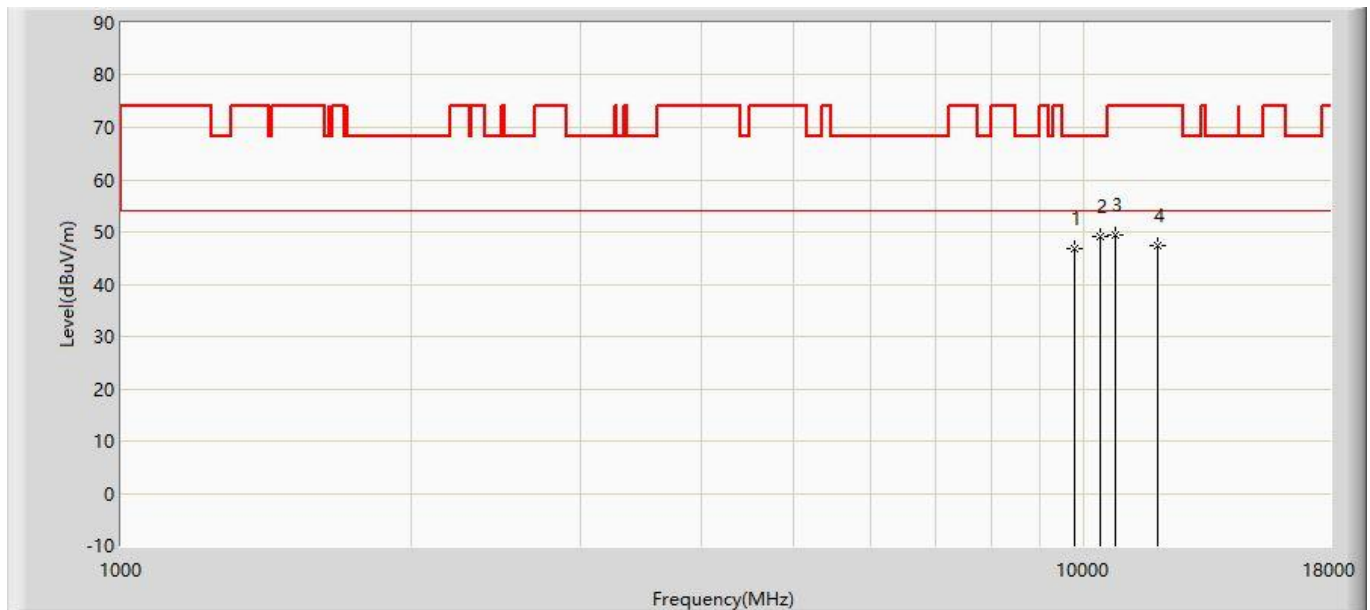


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	46.797	32.313	-21.403	68.200	14.485	PK
2		*	10401.000	49.219	32.668	-18.981	68.200	16.551	PK
3			10775.000	49.493	32.232	-24.507	74.000	17.261	PK
4			11914.000	47.504	29.644	-26.496	74.000	17.860	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

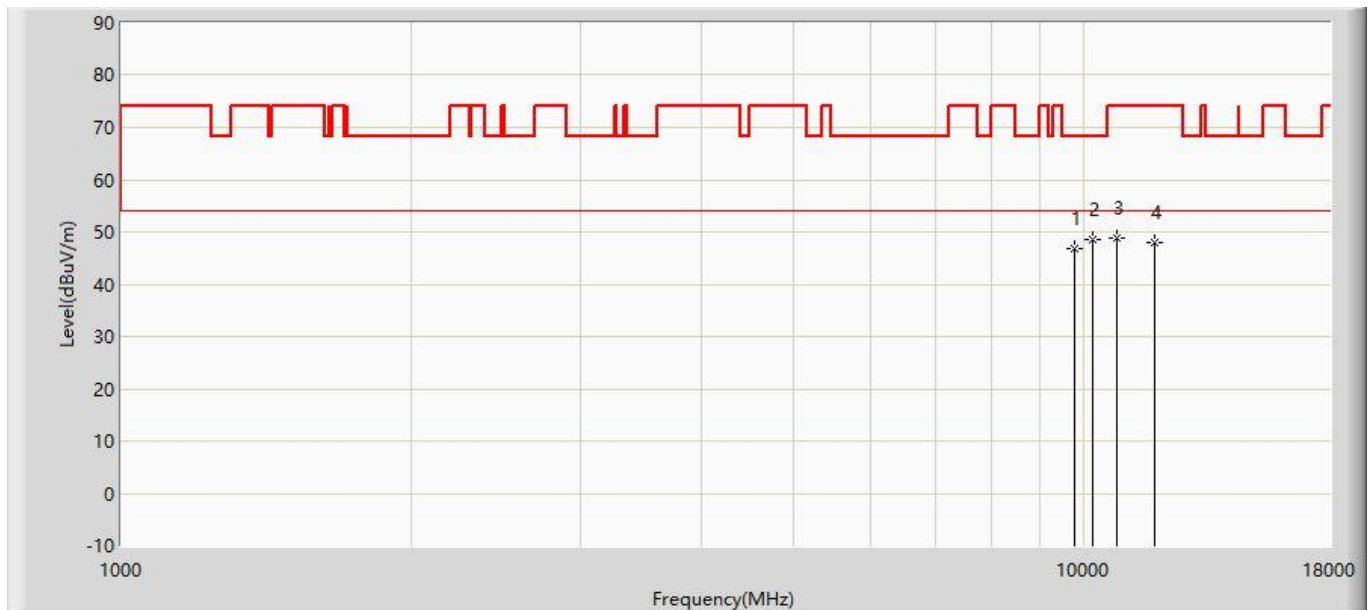


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	46.797	32.313	-21.403	68.200	14.485	PK
2		*	10214.000	48.452	32.503	-19.748	68.200	15.949	PK
3			10800.500	48.815	31.518	-25.185	74.000	17.297	PK
4			11829.000	48.020	30.121	-25.980	74.000	17.899	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

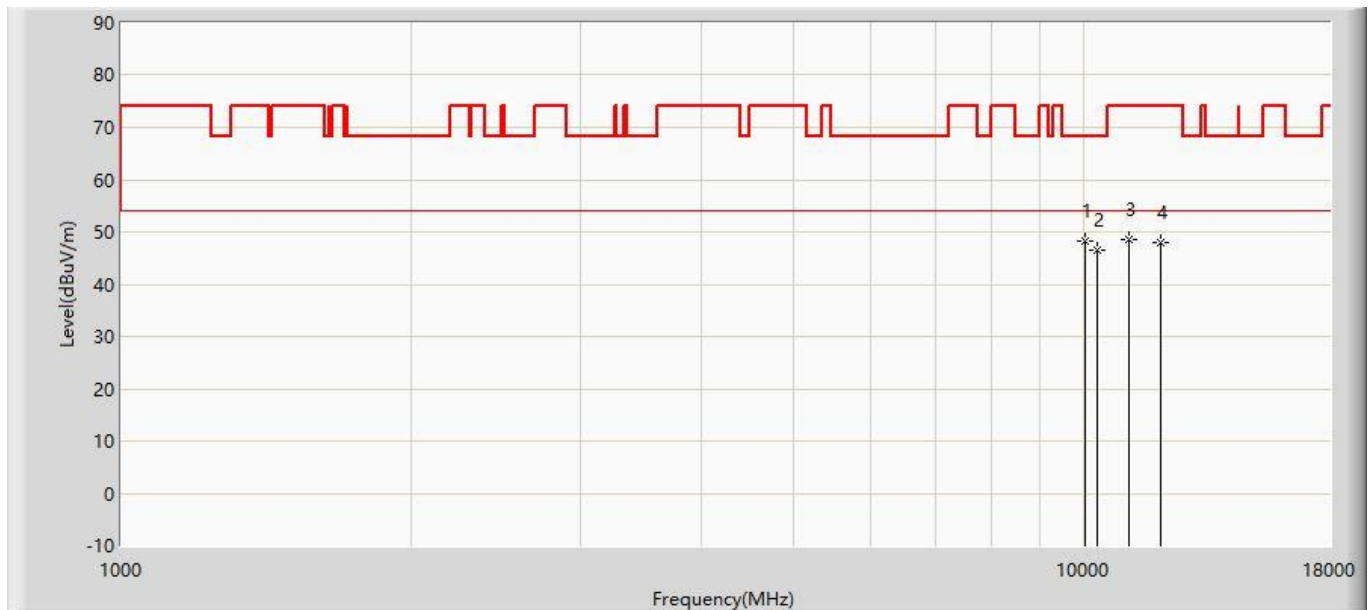


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	10018.500	48.271	32.952	-19.929	68.200	15.318	PK
2			10307.500	46.485	30.234	-21.715	68.200	16.251	PK
3			11140.500	48.602	30.889	-25.398	74.000	17.712	PK
4			12024.500	47.957	30.138	-26.043	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

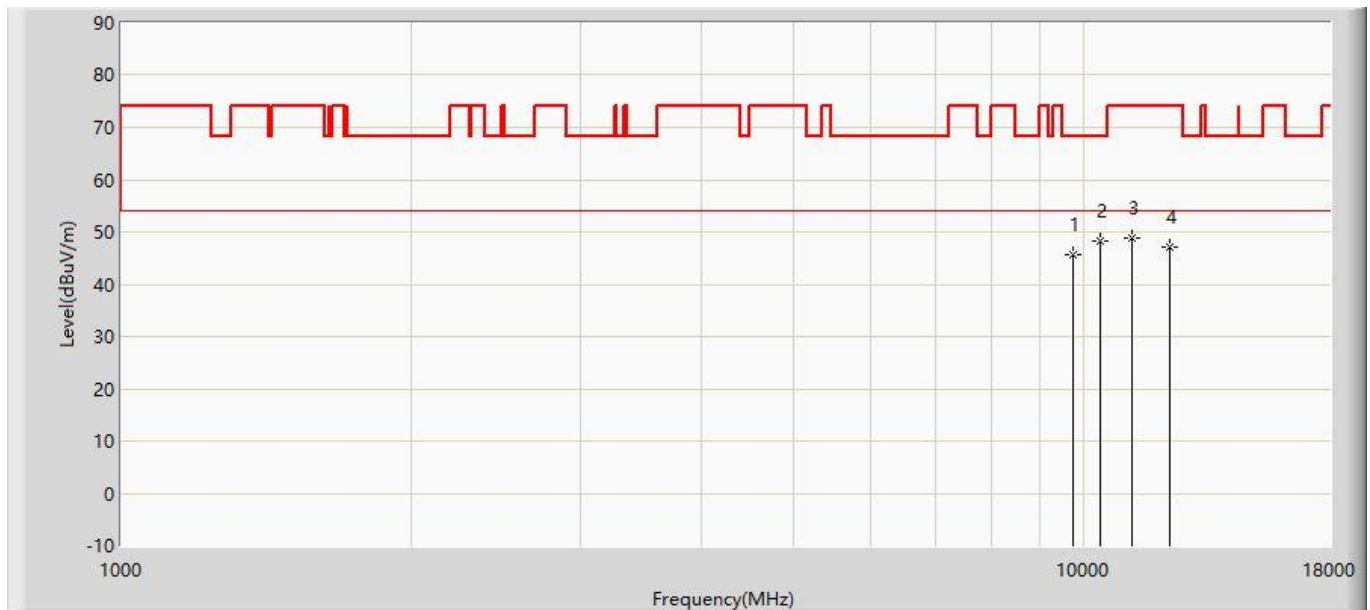


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9755.000	45.788	31.332	-22.412	68.200	14.456	PK
2		*	10392.500	48.117	31.594	-20.083	68.200	16.524	PK
3			11200.000	48.794	31.026	-25.206	74.000	17.768	PK
4			12271.000	47.003	29.192	-26.997	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5600MHz with OAW-AP1361 (CDD Mode)	

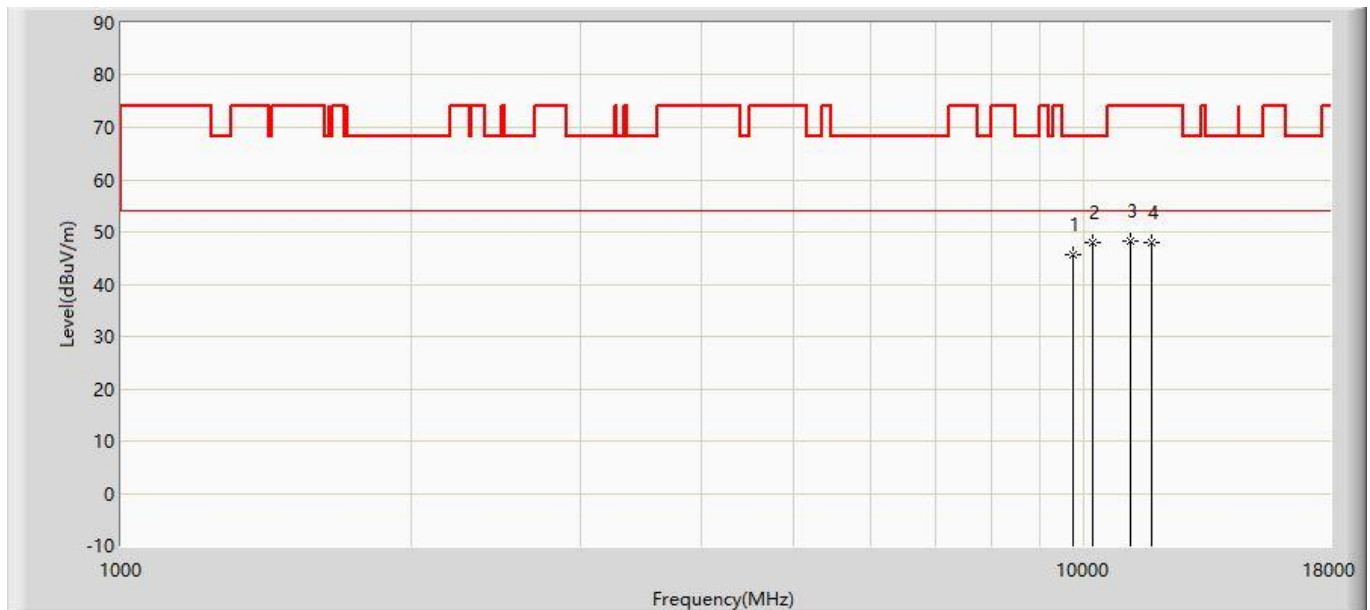


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9755.000	45.788	31.332	-22.412	68.200	14.456	PK
2		*	10214.000	48.019	32.070	-20.181	68.200	15.949	PK
3			11157.500	48.290	30.562	-25.710	74.000	17.728	PK
4			11735.500	48.048	30.107	-25.952	74.000	17.941	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5600MHz with OAW-AP1361 (CDD Mode)	

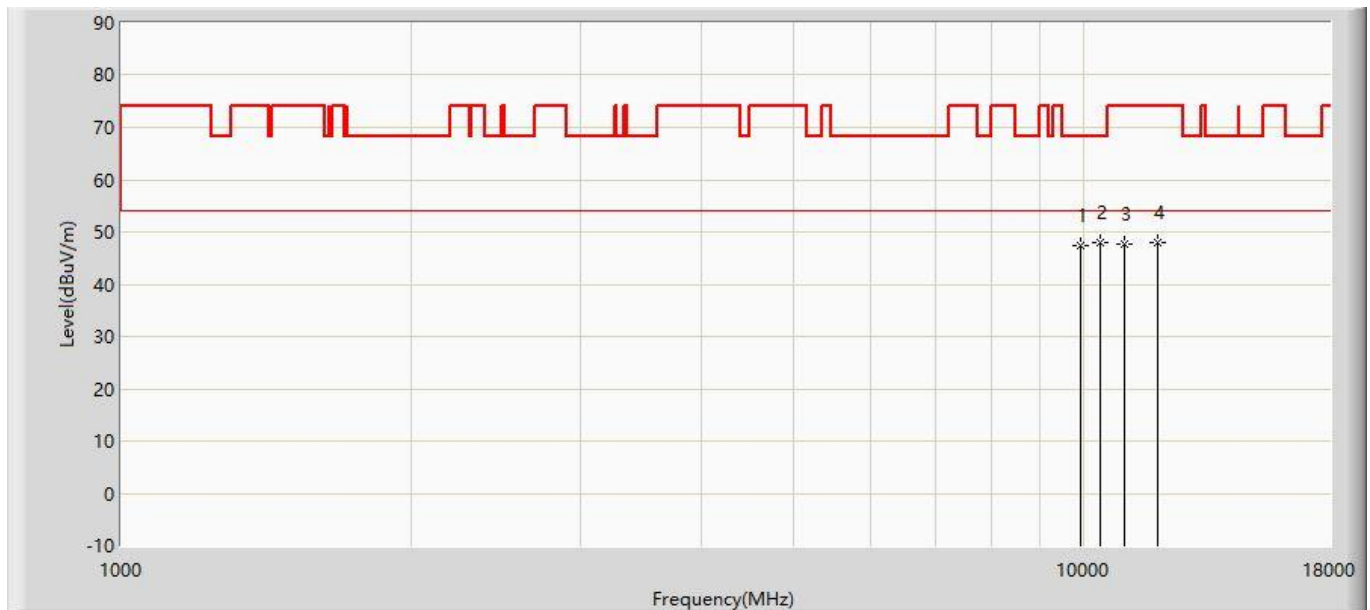


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9925.000	47.421	32.407	-20.779	68.200	15.014	PK
2		*	10401.000	48.006	31.455	-20.194	68.200	16.551	PK
3			11013.000	47.658	30.066	-26.342	74.000	17.592	PK
4			11905.500	47.866	30.002	-26.134	74.000	17.863	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz with OAW-AP1361 (CDD Mode)	

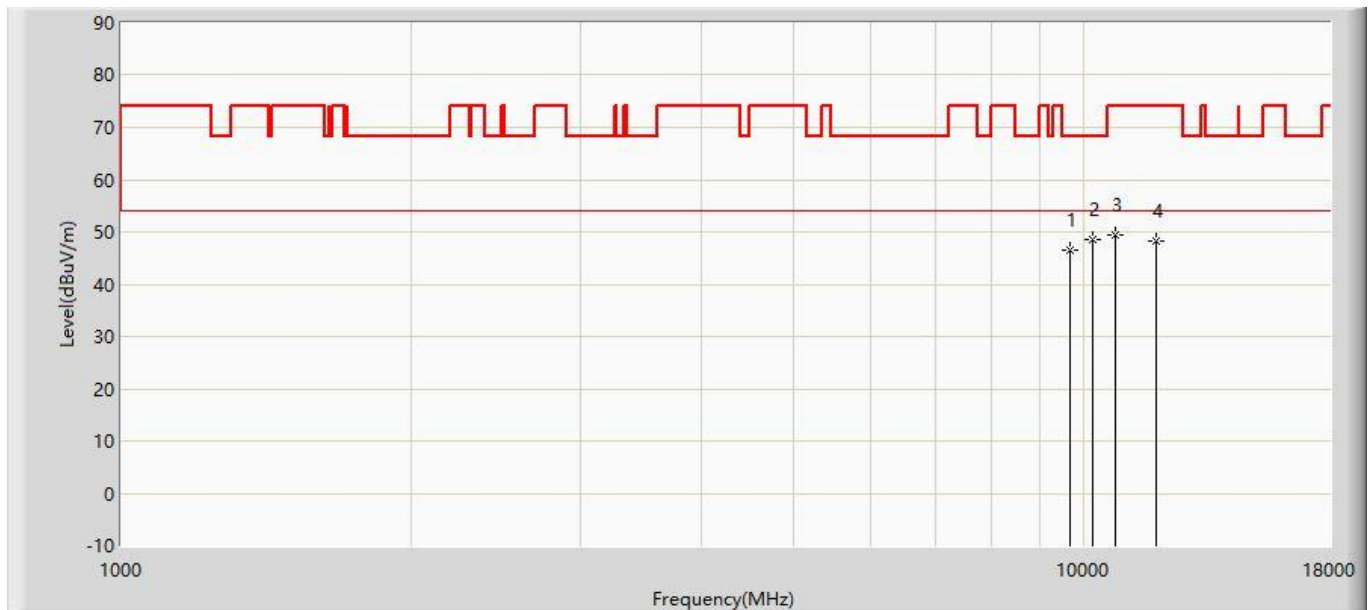


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	46.422	32.272	-21.778	68.200	14.151	PK
2		*	10214.000	48.494	32.545	-19.706	68.200	15.949	PK
3			10758.000	49.387	32.151	-24.613	74.000	17.236	PK
4			11880.000	48.138	30.263	-25.862	74.000	17.875	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz with OAW-AP1361 (CDD Mode)	

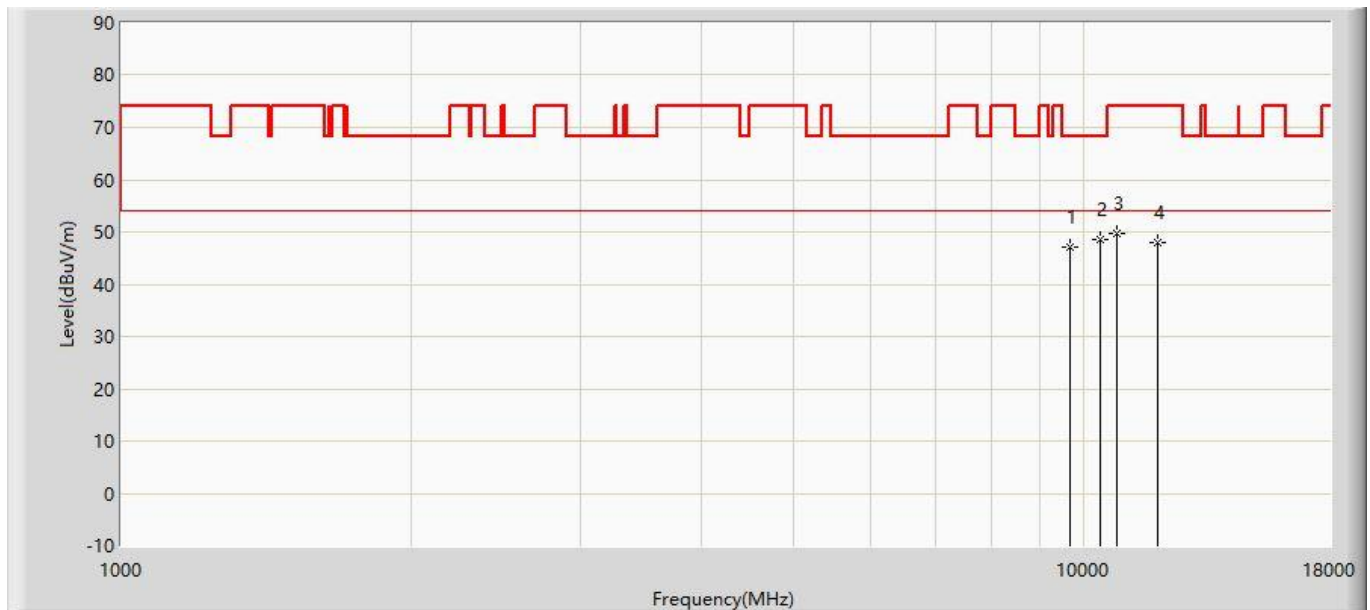


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9653.000	47.152	33.030	-21.048	68.200	14.122	PK
2		*	10401.000	48.518	31.967	-19.682	68.200	16.551	PK
3			10800.500	49.652	32.355	-24.348	74.000	17.297	PK
4			11931.000	47.976	30.125	-26.024	74.000	17.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5720MHz with OAW-AP1361 (CDD Mode)	

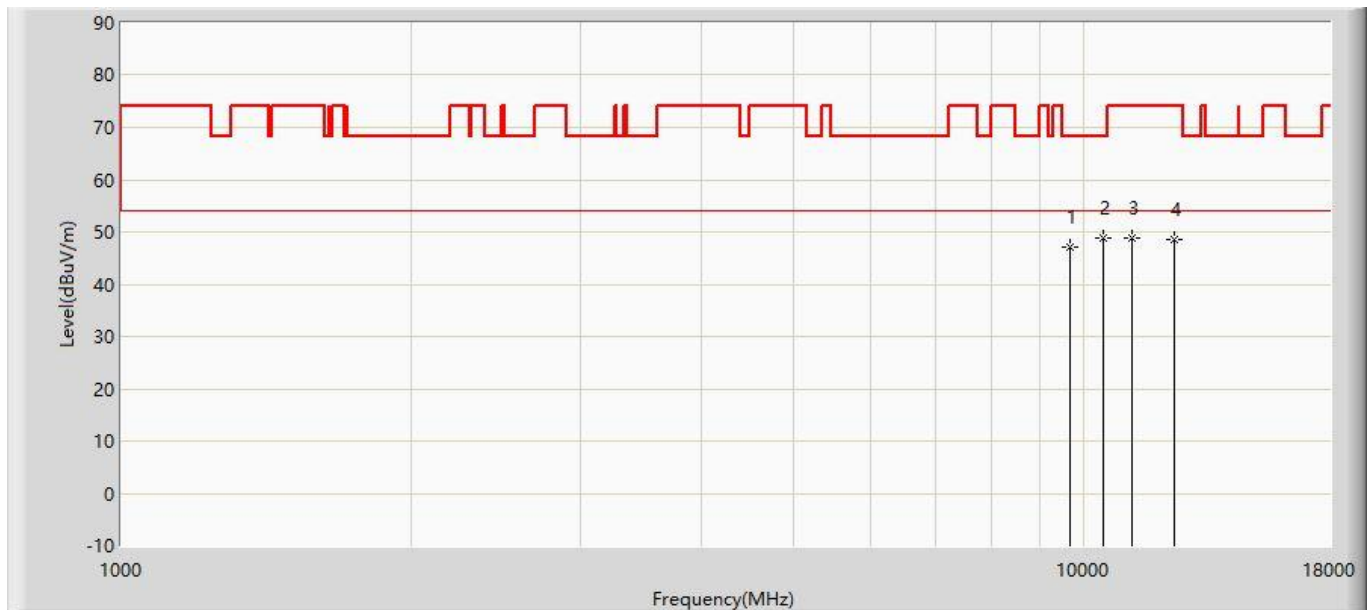


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9653.000	47.152	33.030	-21.048	68.200	14.122	PK
2		*	10452.000	48.858	32.143	-19.342	68.200	16.715	PK
3			11200.000	48.774	31.006	-25.226	74.000	17.768	PK
4			12424.000	48.609	30.802	-25.391	74.000	17.807	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5720MHz with OAW-AP1361 (CDD Mode)	

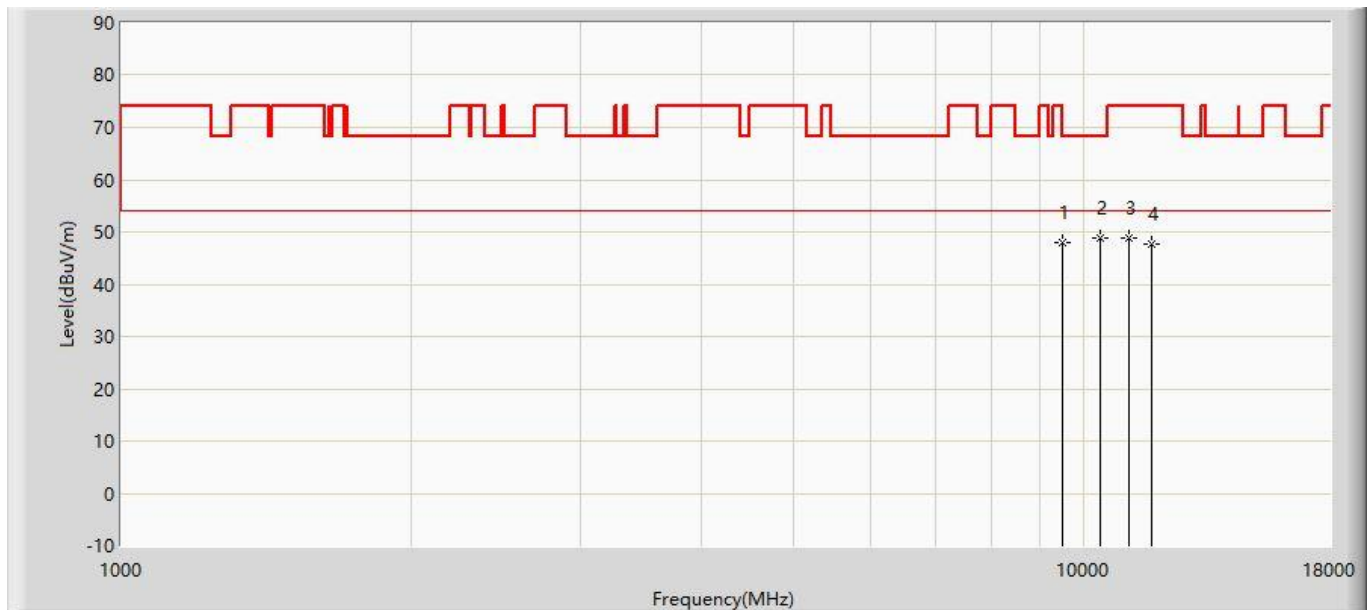


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9483.000	47.843	34.217	-26.157	74.000	13.626	PK
2		*	10392.500	48.929	32.406	-19.271	68.200	16.524	PK
3			11140.500	48.704	30.991	-25.296	74.000	17.712	PK
4			11761.000	47.784	29.854	-26.216	74.000	17.930	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz with OAW-AP1361 (CDD Mode)	

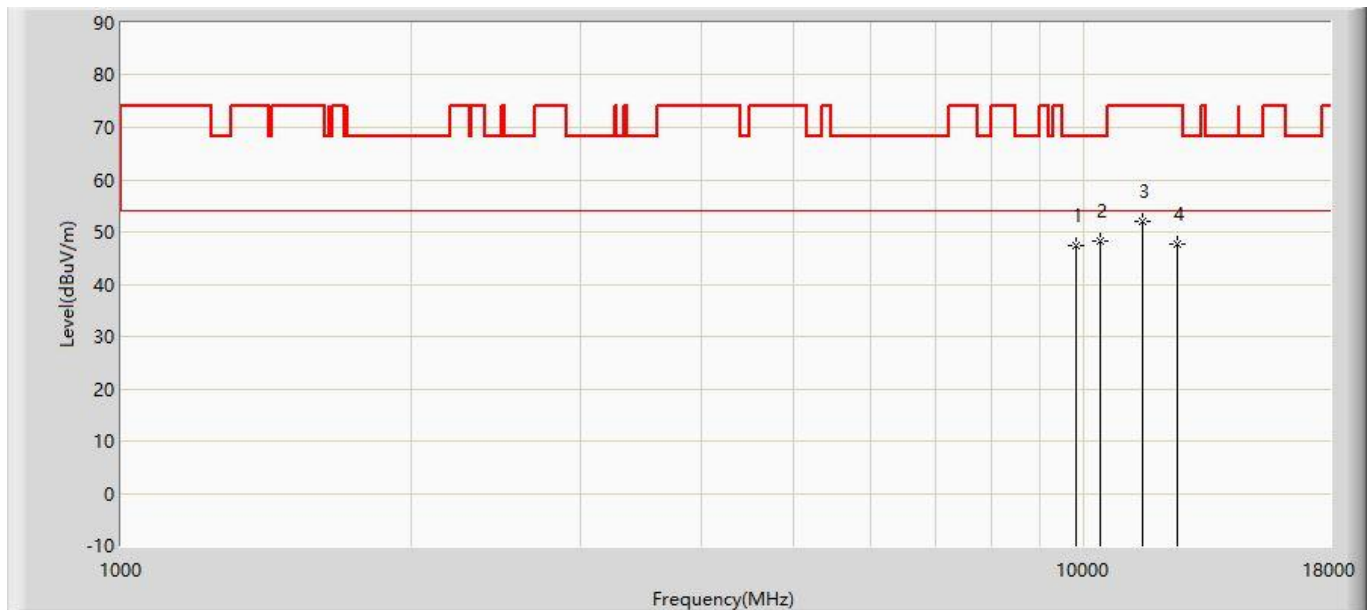


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9806.000	47.253	32.629	-20.947	68.200	14.624	PK
2		*	10401.000	48.194	31.643	-20.006	68.200	16.551	PK
3			11489.000	52.154	34.114	-21.846	74.000	18.040	PK
4			12483.500	47.699	29.894	-26.301	74.000	17.806	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz with OAW-AP1361 (CDD Mode)	

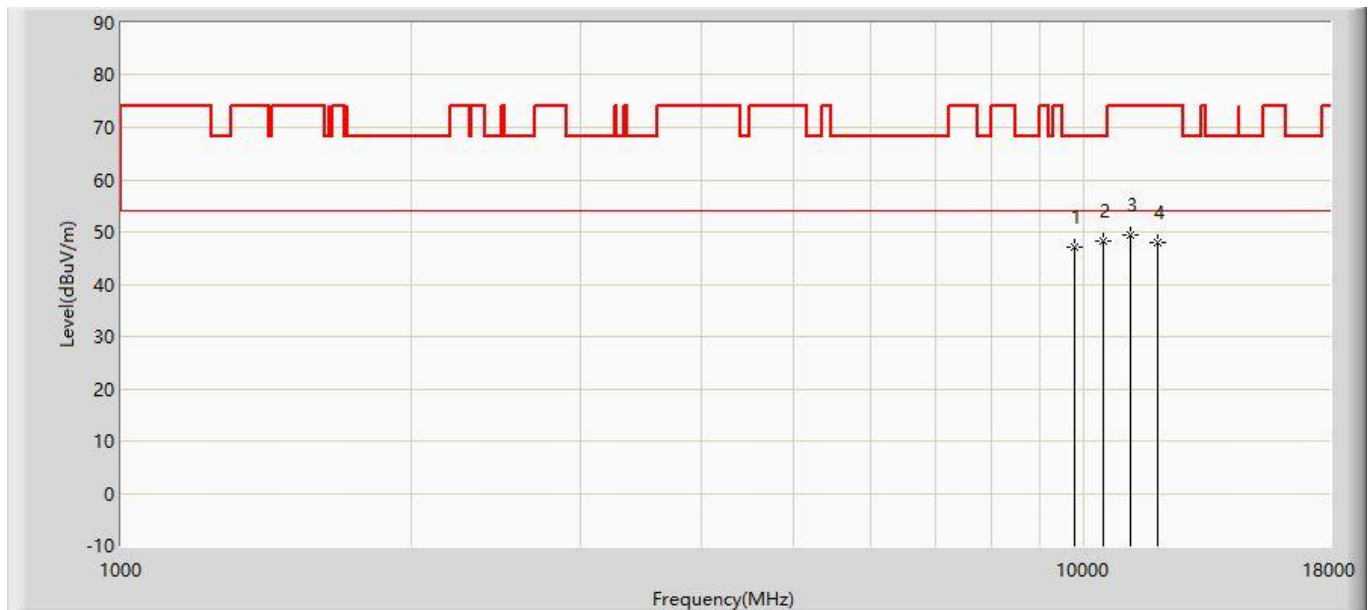


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	47.051	32.539	-21.149	68.200	14.512	PK
2		*	10486.000	48.346	31.521	-19.854	68.200	16.825	PK
3			11191.500	49.380	31.620	-24.620	74.000	17.760	PK
4			11939.500	48.010	30.162	-25.990	74.000	17.848	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5785MHz with OAW-AP1361 (CDD Mode)	

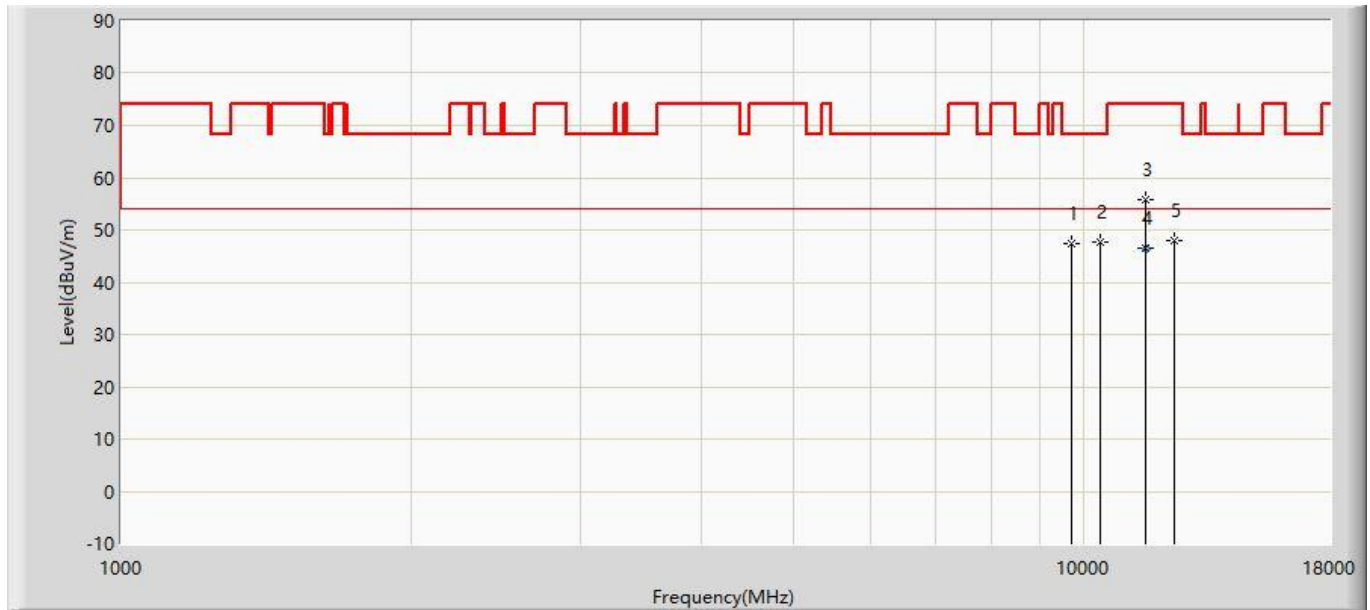


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9712.500	47.337	33.020	-20.863	68.200	14.316	PK
2			10401.000	47.595	31.044	-20.605	68.200	16.551	PK
3			11565.500	55.675	37.655	-18.325	74.000	18.020	PK
4		*	11569.380	46.457	28.439	-7.543	54.000	18.018	AV
5			12424.000	47.991	30.184	-26.009	74.000	17.807	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5785MHz with OAW-AP1361 (CDD Mode)	

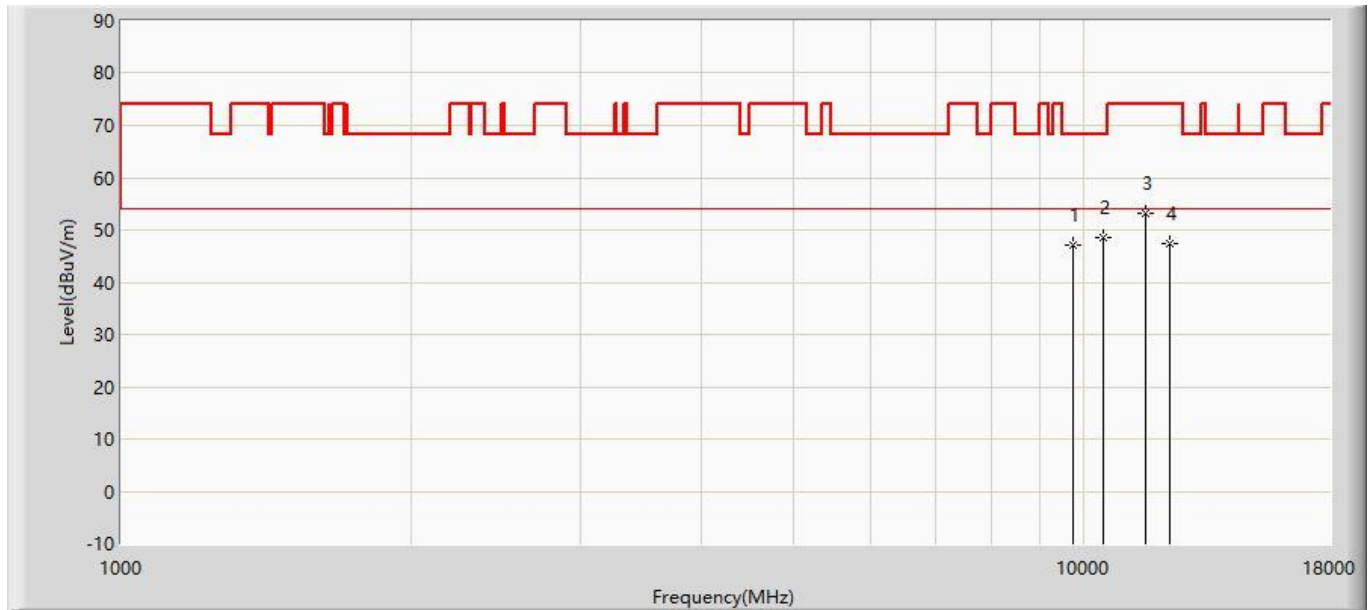


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	47.070	32.669	-21.130	68.200	14.401	PK
2		*	10486.000	48.418	31.593	-19.782	68.200	16.825	PK
3			11565.500	53.093	35.073	-20.907	74.000	18.020	PK
4			12271.000	47.415	29.604	-26.585	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz with OAW-AP1361 (CDD Mode)	

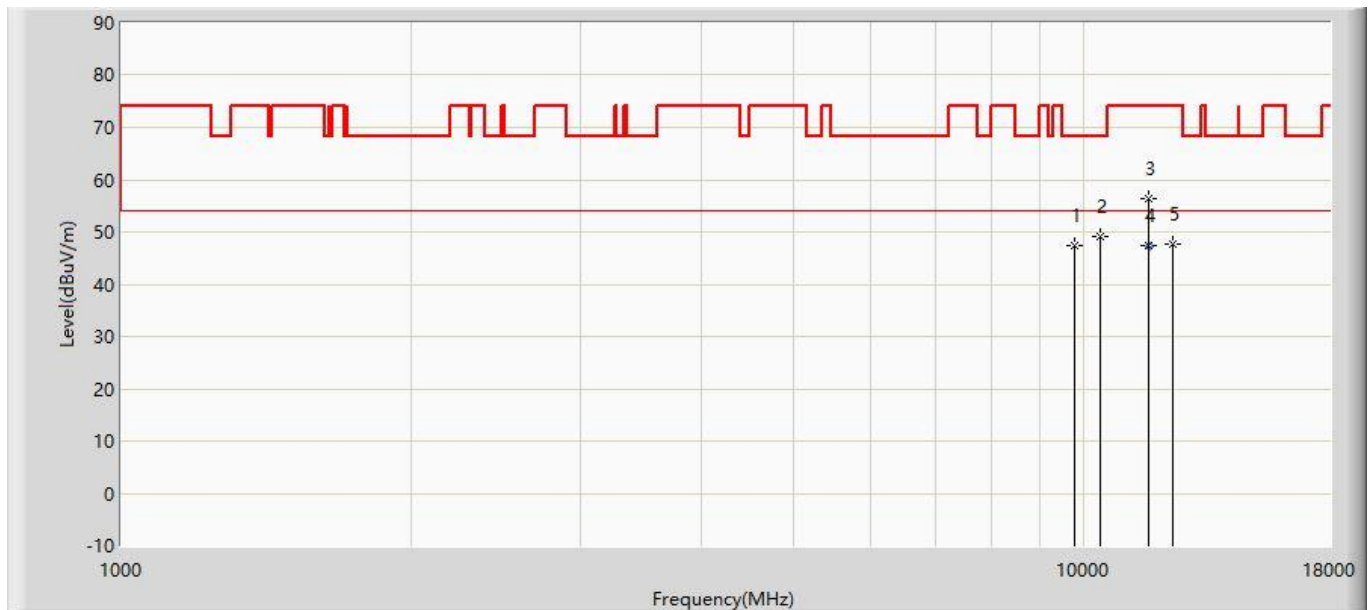


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9780.500	47.470	32.930	-20.730	68.200	14.540	PK
2			10384.000	49.002	32.506	-19.198	68.200	16.496	PK
3			11650.500	56.401	38.420	-17.599	74.000	17.981	PK
4		*	11650.990	47.531	29.550	-6.469	54.000	17.981	AV
5			12381.500	47.747	29.938	-26.253	74.000	17.808	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz with OAW-AP1361 (CDD Mode)	

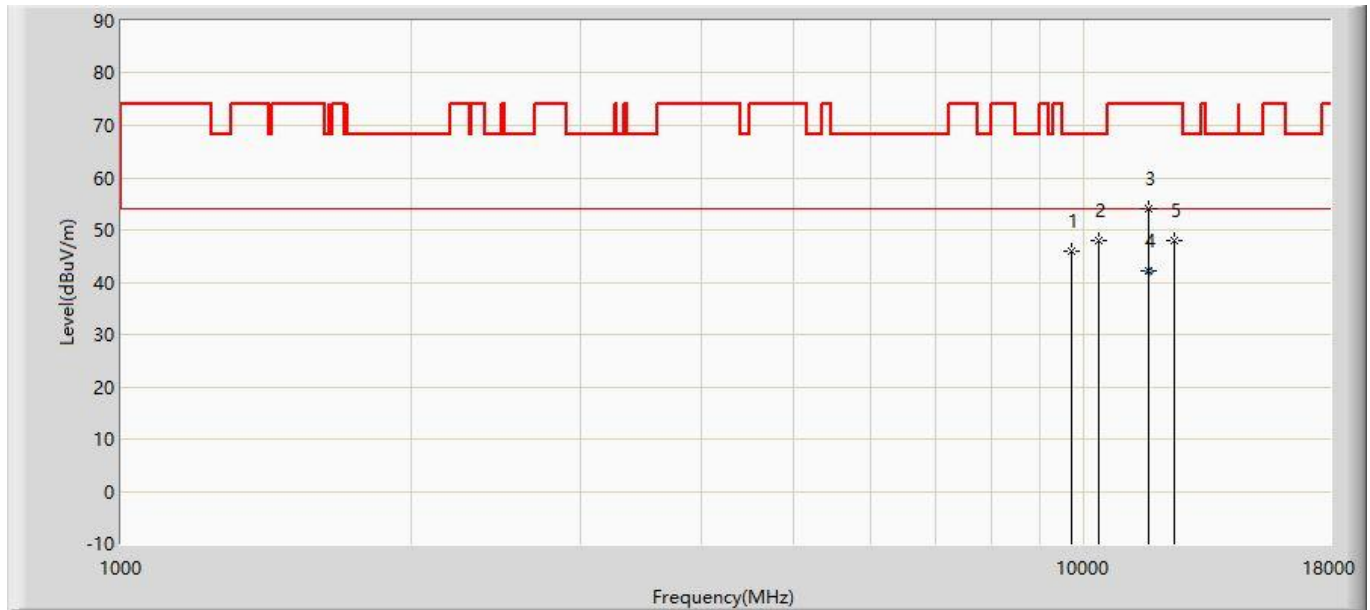


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9687.000	46.082	31.850	-22.118	68.200	14.232	PK
2			10367.000	48.064	31.623	-20.136	68.200	16.441	PK
3			11650.500	54.153	36.172	-19.847	74.000	17.981	PK
4		*	11650.500	42.115	24.134	-11.885	54.000	17.981	AV
5			12390.000	47.938	30.130	-26.062	74.000	17.808	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

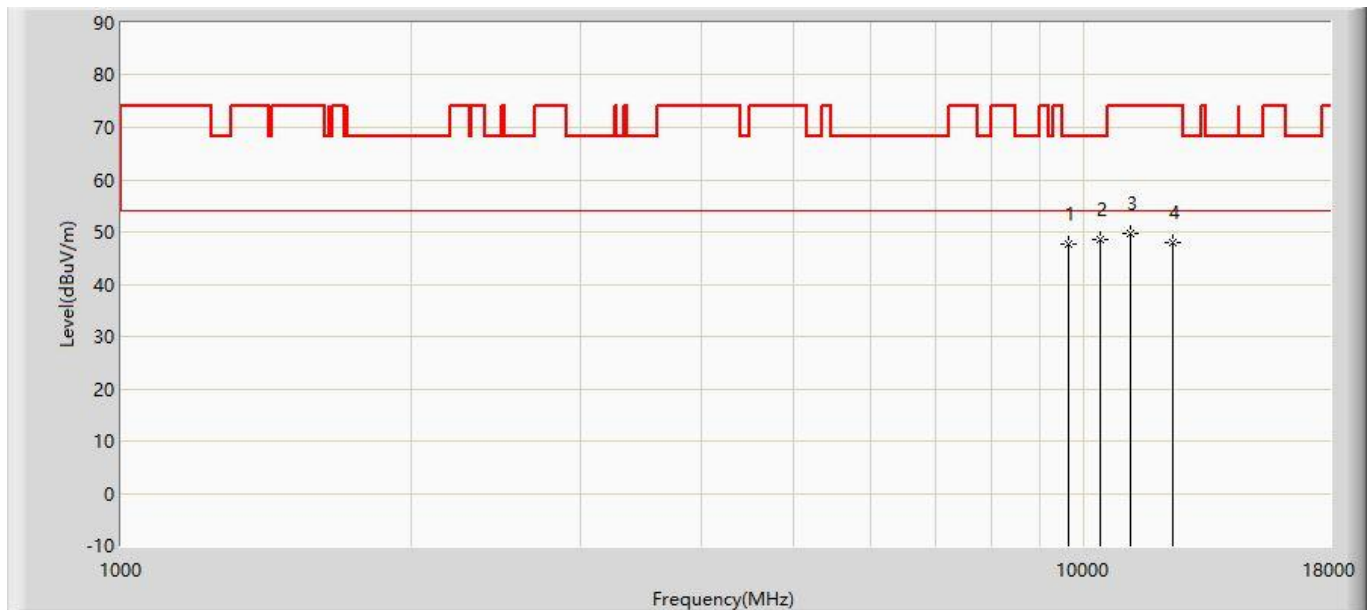


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9636.000	47.691	33.625	-20.509	68.200	14.066	PK
2		*	10392.500	48.482	31.959	-19.718	68.200	16.524	PK
3			11166.000	49.583	31.848	-24.417	74.000	17.735	PK
4			12381.500	47.830	30.021	-26.170	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

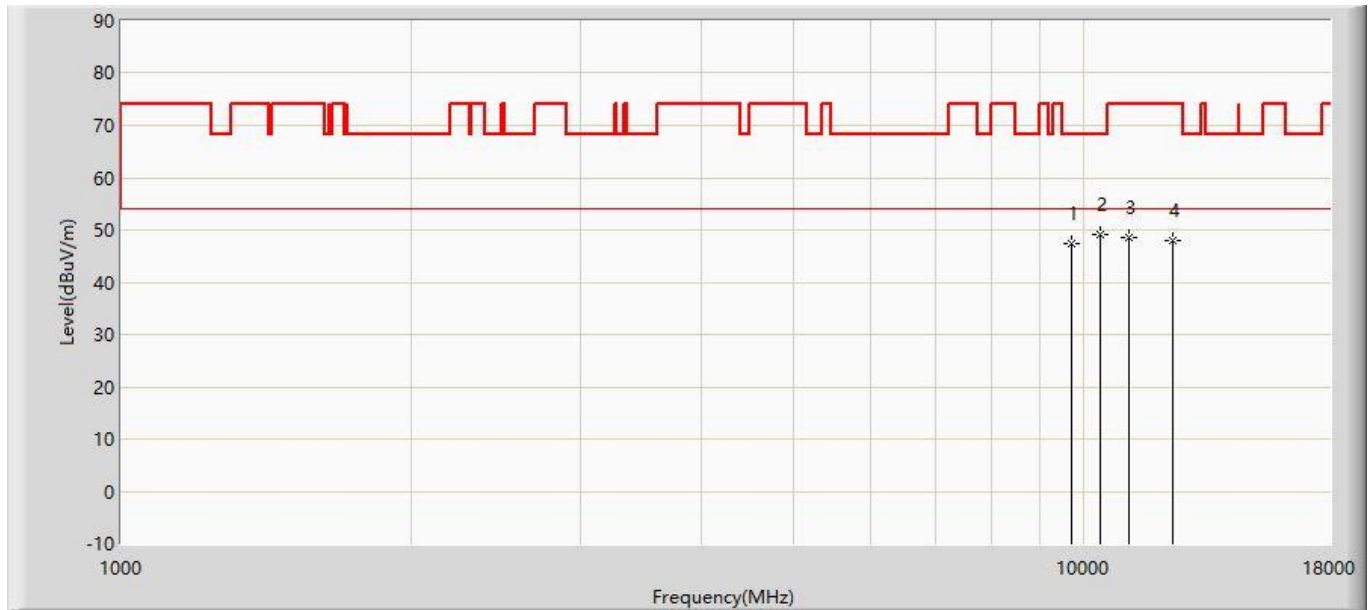


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	47.364	33.075	-20.836	68.200	14.289	PK
2		*	10401.000	49.010	32.459	-19.190	68.200	16.551	PK
3			11149.000	48.547	30.827	-25.453	74.000	17.720	PK
4			12381.500	47.830	30.021	-26.170	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5230MHz with OAW-AP1361 (CDD Mode)	

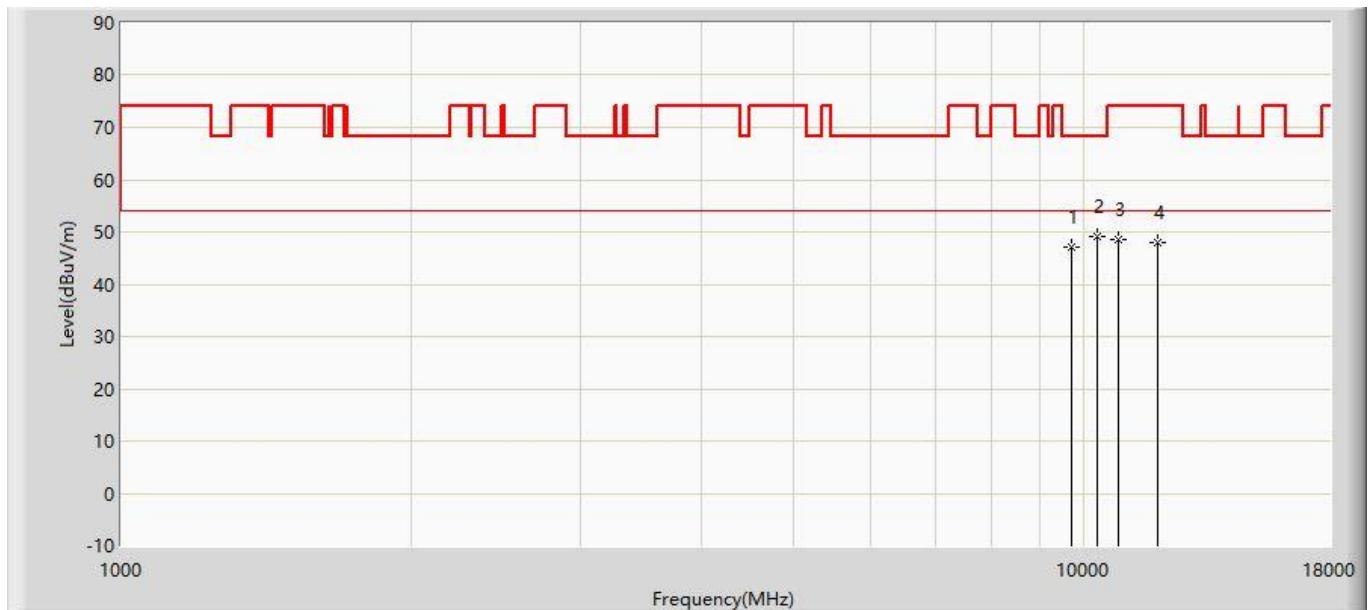


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	47.226	32.881	-20.974	68.200	14.345	PK
2		*	10333.000	49.169	32.836	-19.031	68.200	16.333	PK
3			10843.000	48.650	31.294	-25.350	74.000	17.356	PK
4			11931.000	48.036	30.185	-25.964	74.000	17.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5230MHz with OAW-AP1361 (CDD Mode)	

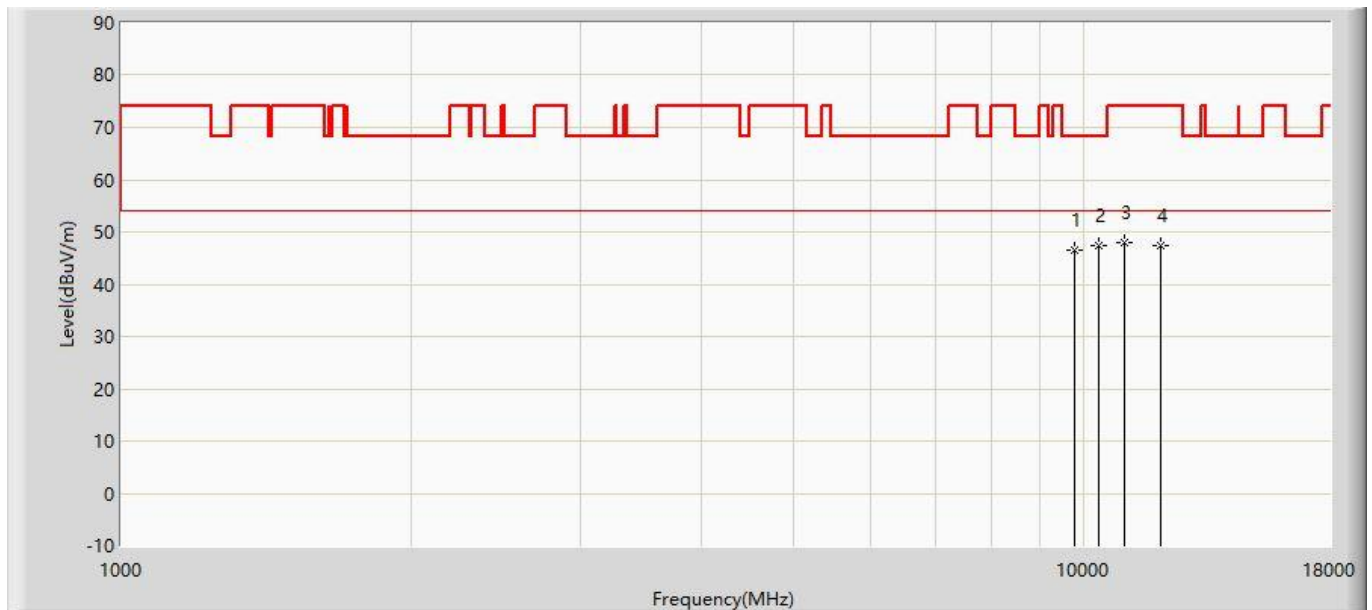


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	46.656	32.144	-21.544	68.200	14.512	PK
2		*	10367.000	47.498	31.057	-20.702	68.200	16.441	PK
3			11030.000	47.975	30.367	-26.025	74.000	17.608	PK
4			12024.500	47.314	29.495	-26.686	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5270MHz with OAW-AP1361 (CDD Mode)	

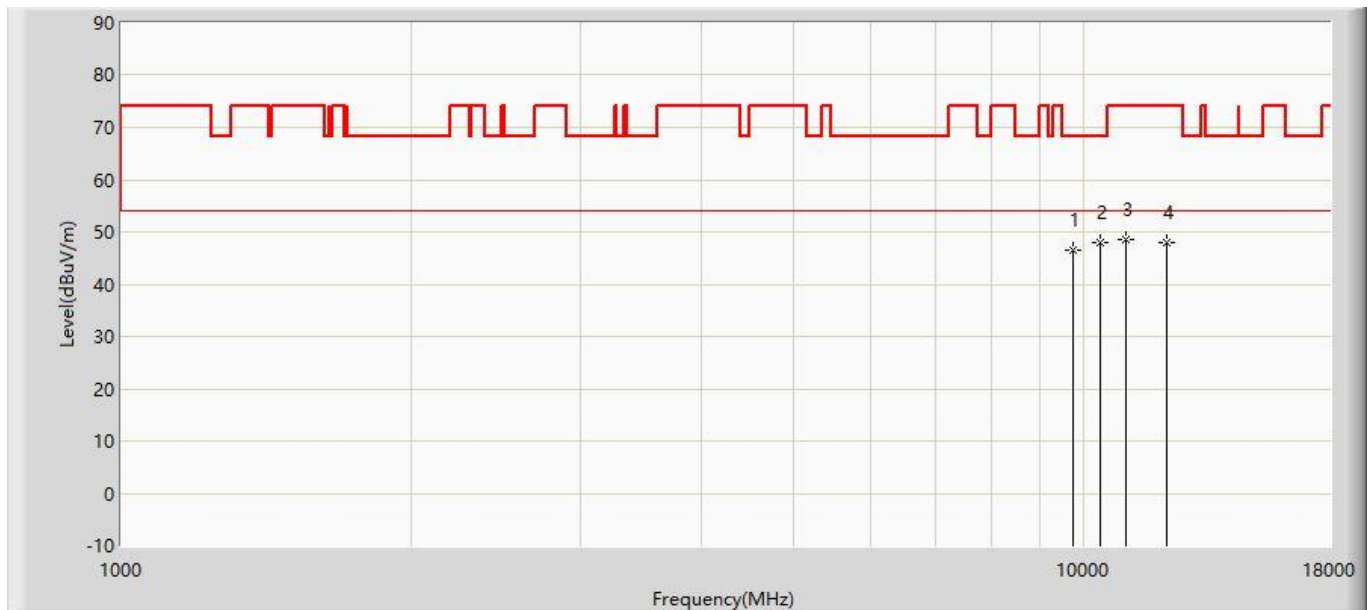


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9729.500	46.463	32.090	-21.737	68.200	14.373	PK
2		*	10384.000	48.101	31.605	-20.099	68.200	16.496	PK
3			11047.000	48.556	30.932	-25.444	74.000	17.624	PK
4			12169.000	48.079	30.263	-25.921	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5270MHz with OAW-AP1361 (CDD Mode)	

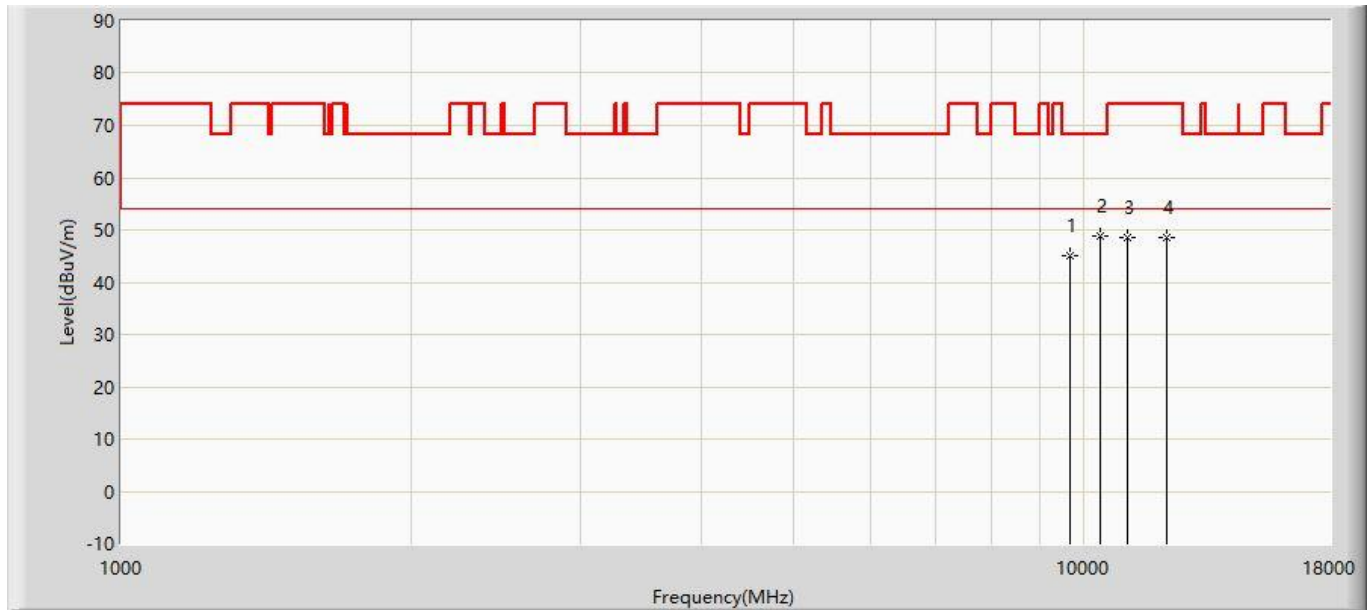


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9678.500	44.973	30.768	-23.227	68.200	14.205	PK
2		*	10392.500	48.918	32.395	-19.282	68.200	16.524	PK
3			11081.000	48.423	30.767	-25.577	74.000	17.656	PK
4			12203.000	48.472	30.659	-25.528	74.000	17.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

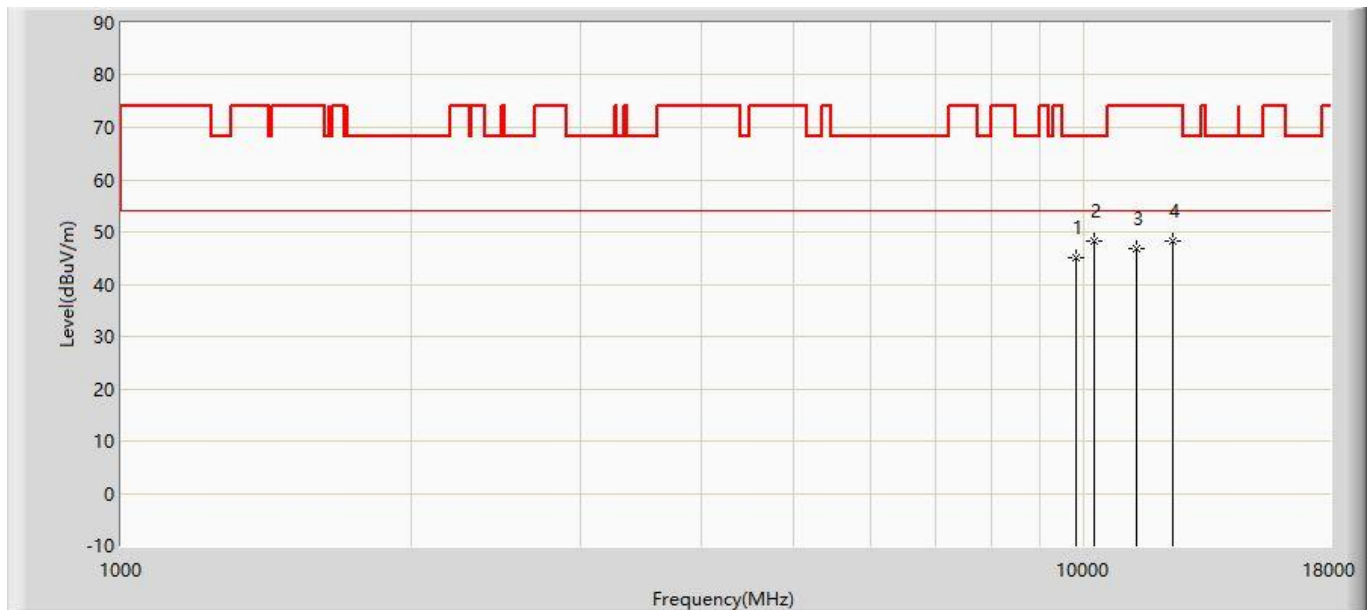


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	45.038	30.386	-23.162	68.200	14.652	PK
2		*	10248.000	48.353	32.294	-19.847	68.200	16.059	PK
3			11319.000	46.842	28.962	-27.158	74.000	17.880	PK
4			12373.000	48.308	30.499	-25.692	74.000	17.809	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

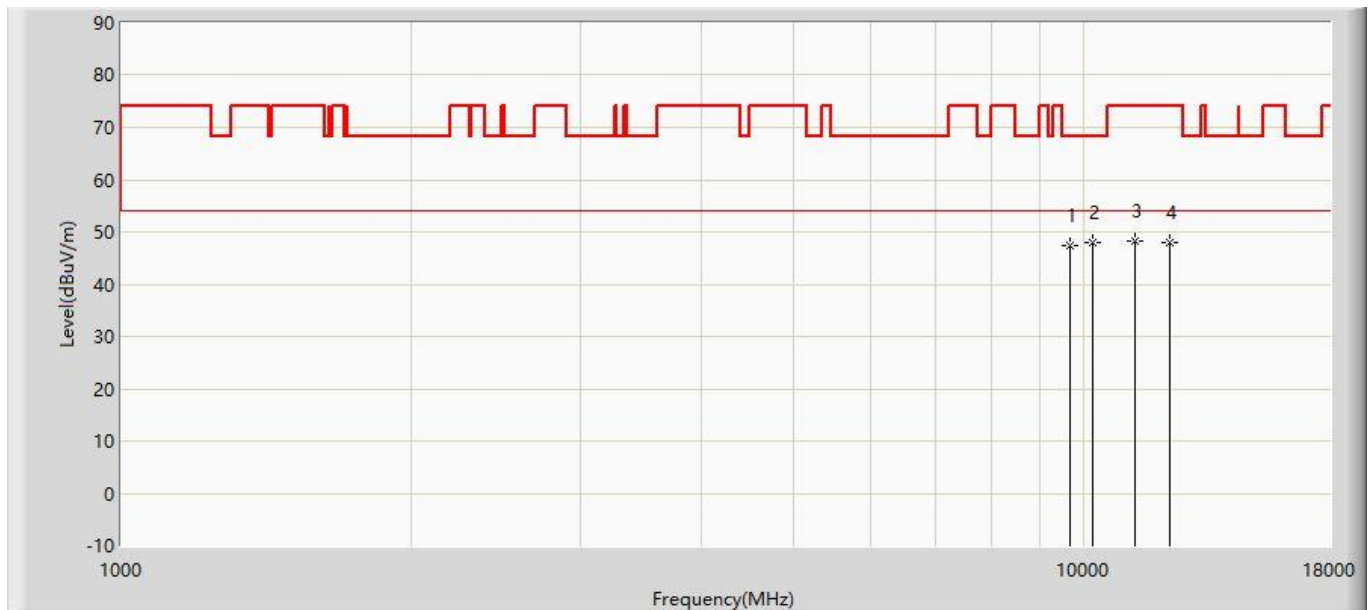


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9670.000	47.268	33.090	-20.932	68.200	14.178	PK
2		*	10214.000	48.104	32.155	-20.096	68.200	15.949	PK
3			11276.500	48.165	30.325	-25.835	74.000	17.840	PK
4			12271.000	48.068	30.257	-25.932	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

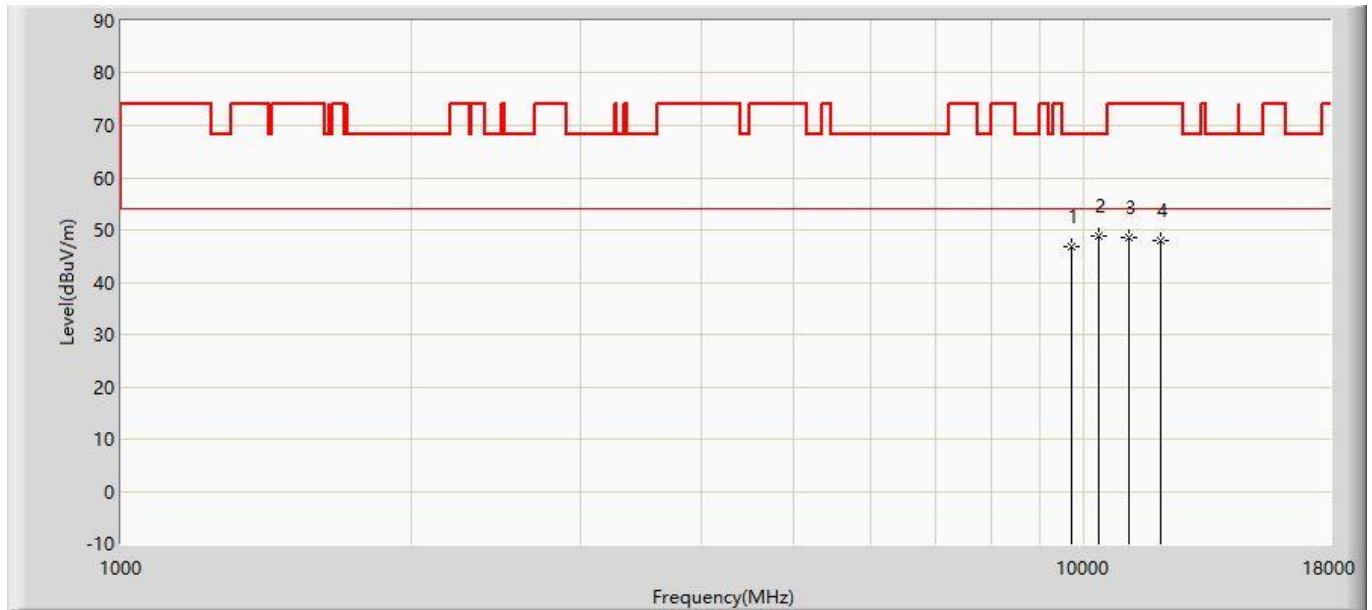


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9695.500	46.782	32.521	-21.418	68.200	14.261	PK
2		*	10367.000	48.929	32.488	-19.271	68.200	16.441	PK
3			11149.000	48.555	30.835	-25.445	74.000	17.720	PK
4			12024.500	48.033	30.214	-25.967	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

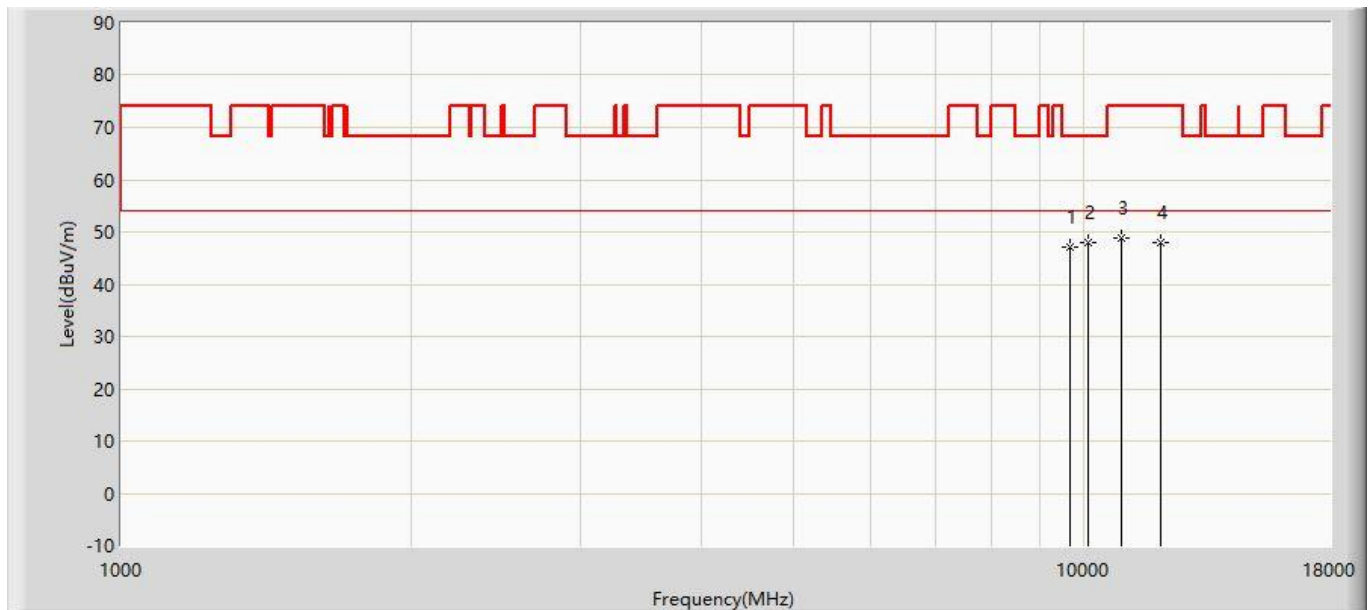


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	47.105	32.955	-21.095	68.200	14.151	PK
2		*	10112.000	47.909	32.288	-20.291	68.200	15.621	PK
3			10928.000	48.960	31.483	-25.040	74.000	17.477	PK
4			12024.500	48.033	30.214	-25.967	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5590MHz with OAW-AP1361 (CDD Mode)	

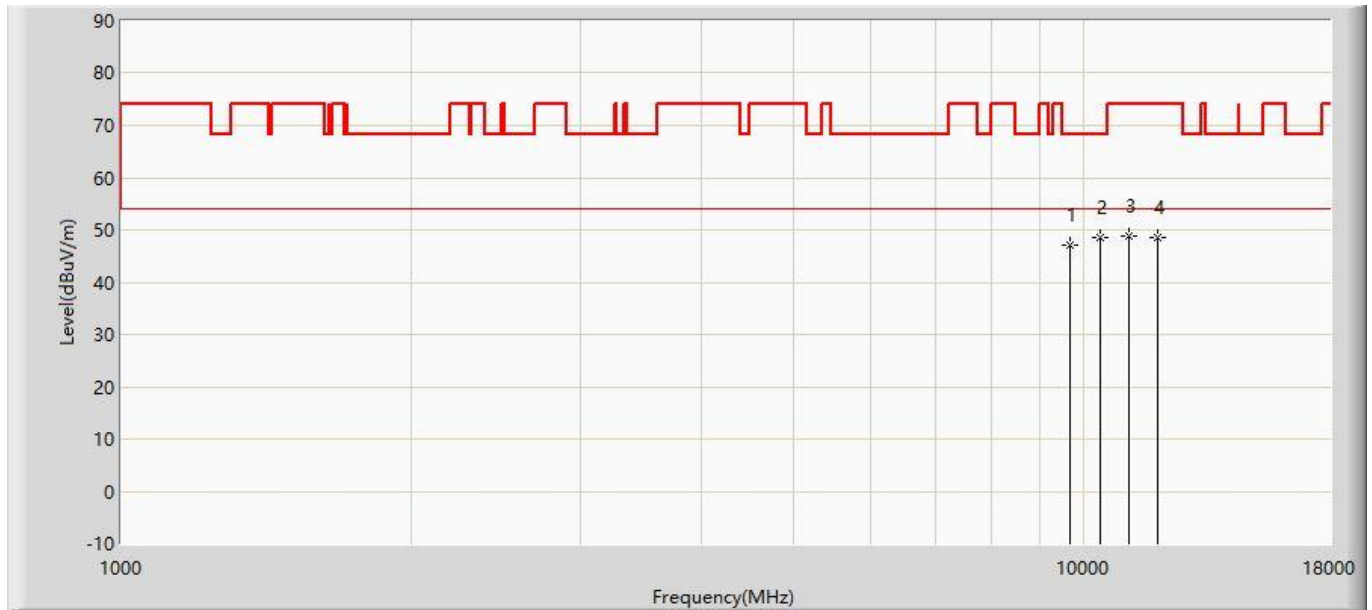


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	47.105	32.955	-21.095	68.200	14.151	PK
2		*	10375.500	48.580	32.111	-19.620	68.200	16.470	PK
3			11149.000	48.811	31.091	-25.189	74.000	17.720	PK
4			11914.000	48.495	30.635	-25.505	74.000	17.860	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5590MHz with OAW-AP1361 (CDD Mode)	

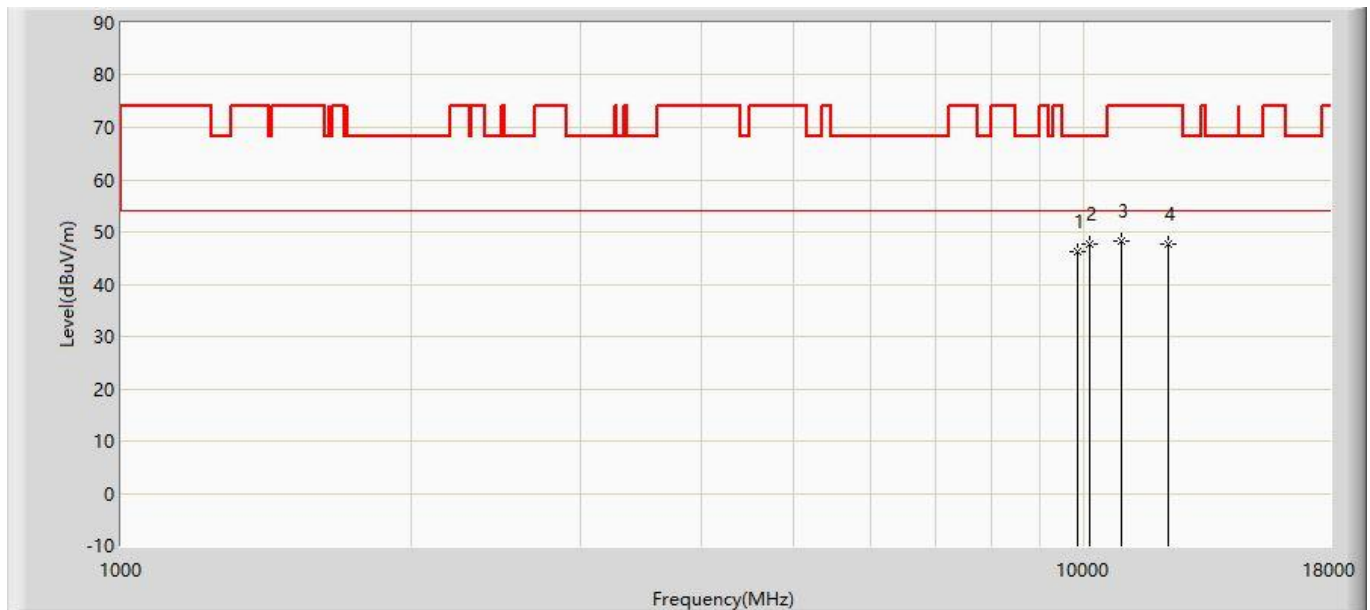


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9848.500	46.168	31.405	-22.032	68.200	14.763	PK
2		*	10120.500	47.727	32.079	-20.473	68.200	15.648	PK
3			10928.000	48.386	30.909	-25.614	74.000	17.477	PK
4			12211.500	47.571	29.757	-26.429	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz with OAW-AP1361 (CDD Mode)	

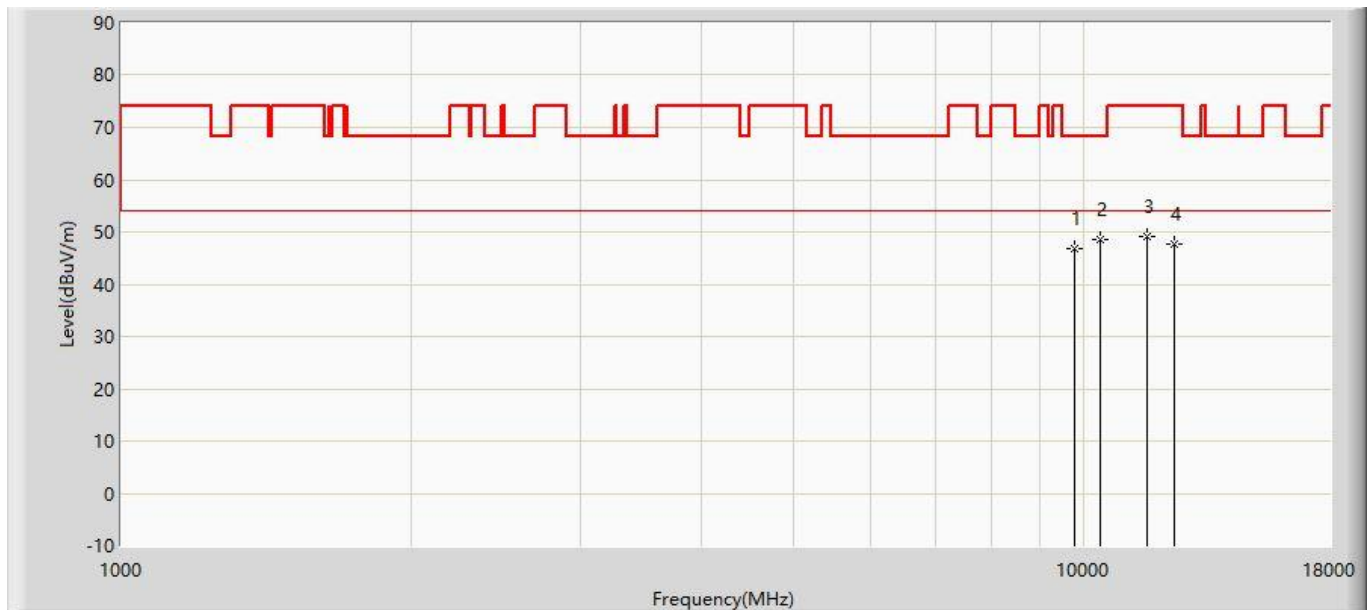


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	46.951	32.467	-21.249	68.200	14.485	PK
2		*	10401.000	48.590	32.039	-19.610	68.200	16.551	PK
3			11608.000	49.165	31.165	-24.835	74.000	18.000	PK
4			12398.500	47.753	29.945	-26.247	74.000	17.807	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz with OAW-AP1361 (CDD Mode)	

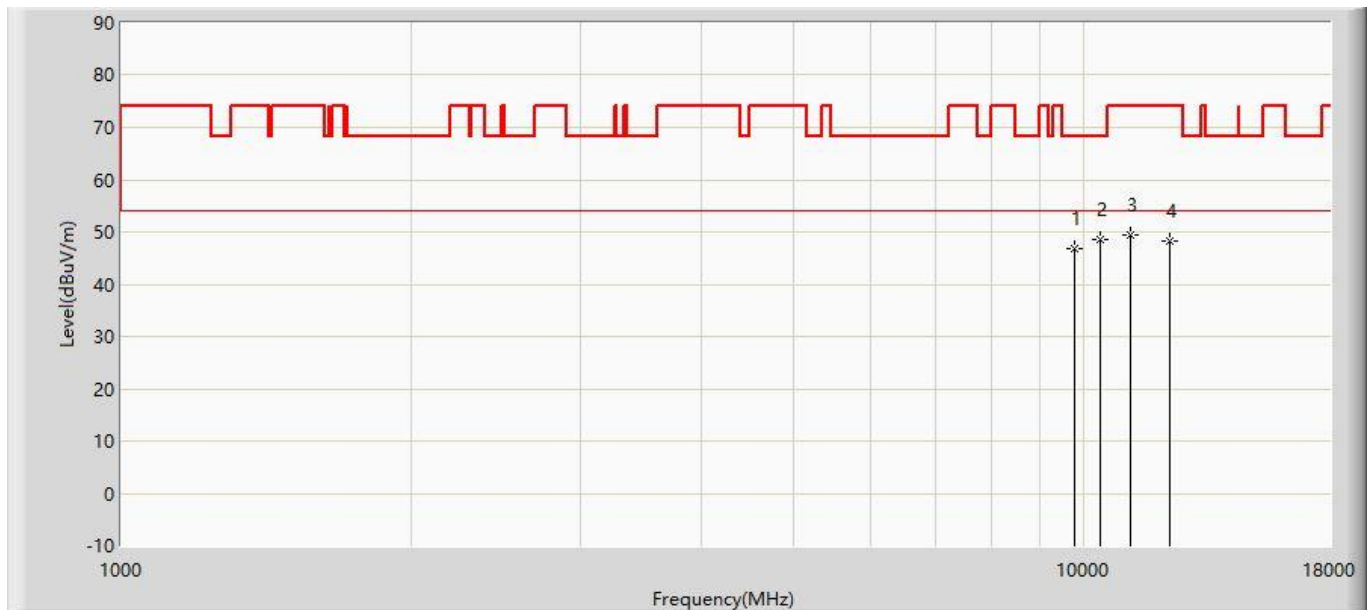


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	46.951	32.467	-21.249	68.200	14.485	PK
2		*	10401.000	48.590	32.039	-19.610	68.200	16.551	PK
3			11174.500	49.422	31.678	-24.578	74.000	17.743	PK
4			12279.500	48.311	30.500	-25.689	74.000	17.810	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5710MHz with OAW-AP1361 (CDD Mode)	

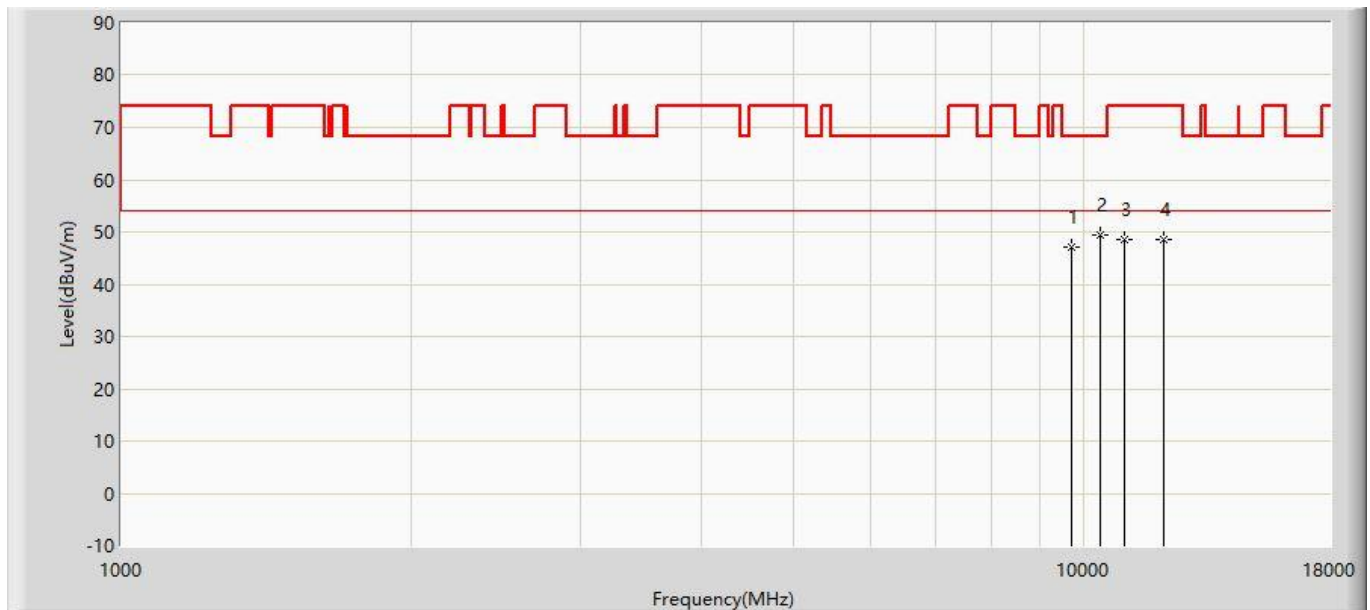


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	47.080	32.791	-21.120	68.200	14.289	PK
2		*	10401.000	49.329	32.778	-18.871	68.200	16.551	PK
3			11021.500	48.415	30.815	-25.585	74.000	17.600	PK
4			12118.000	48.530	30.714	-25.470	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5710MHz with OAW-AP1361 (CDD Mode)	

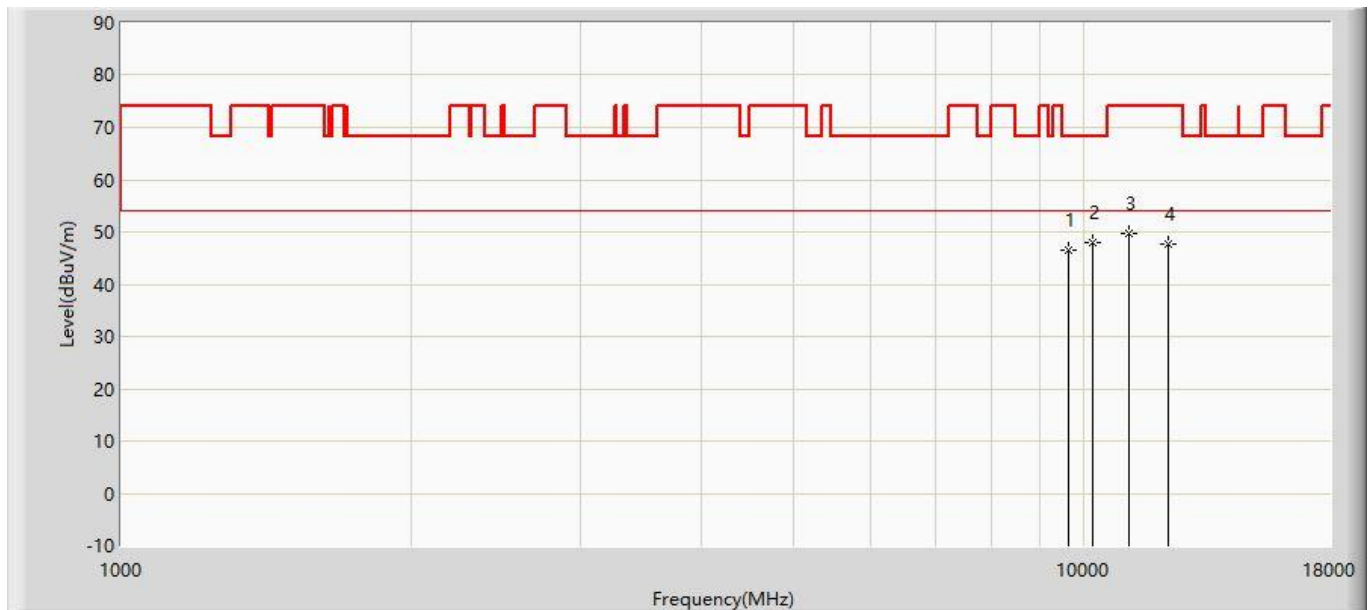


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.481	32.387	-21.719	68.200	14.094	PK
2		*	10214.000	48.064	32.115	-20.136	68.200	15.949	PK
3			11140.500	49.603	31.890	-24.397	74.000	17.712	PK
4			12237.000	47.728	29.915	-26.272	74.000	17.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz with OAW-AP1361 (CDD Mode)	

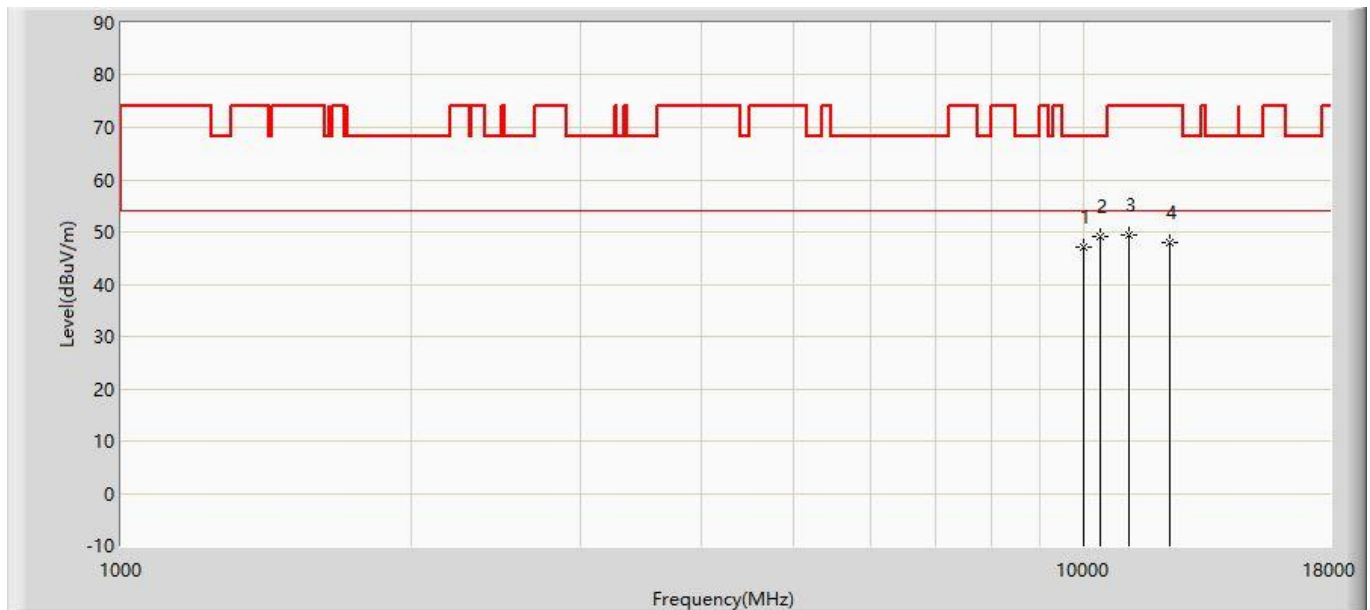


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10001.500	46.997	31.732	-21.203	68.200	15.265	PK
2		*	10392.500	48.987	32.464	-19.213	68.200	16.524	PK
3			11149.000	49.401	31.681	-24.599	74.000	17.720	PK
4			12288.000	47.978	30.167	-26.022	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz with OAW-AP1361 (CDD Mode)	

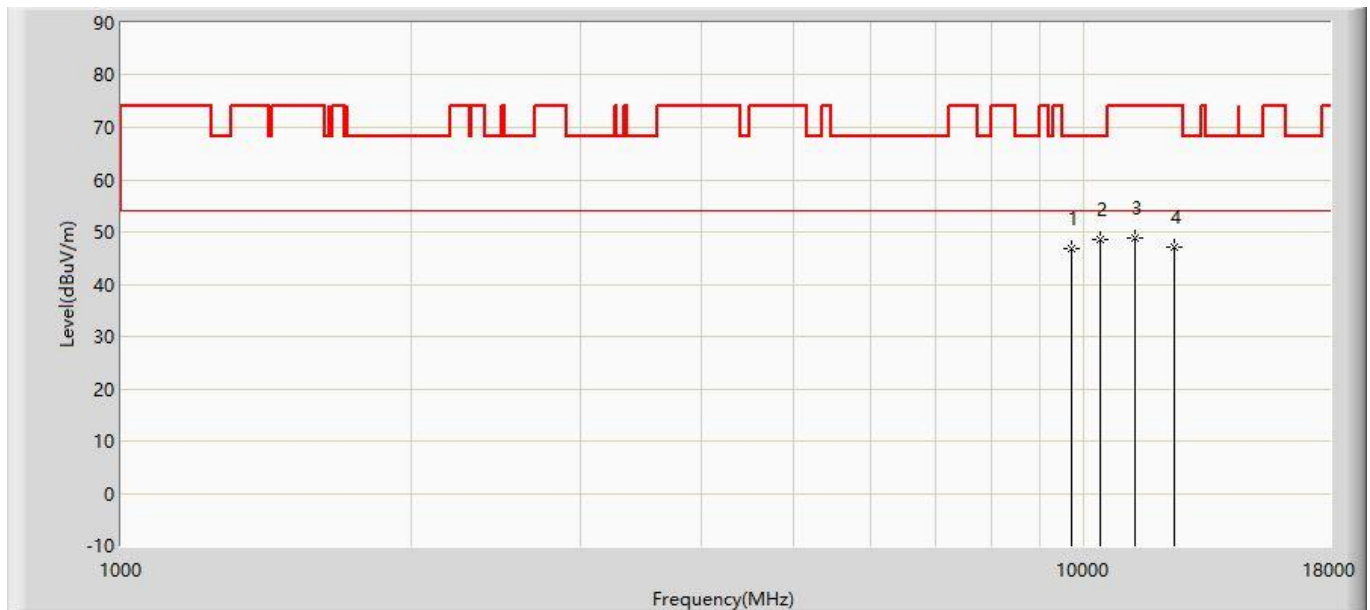


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	46.753	32.464	-21.447	68.200	14.289	PK
2		*	10375.500	48.413	31.944	-19.787	68.200	16.470	PK
3			11302.000	48.763	30.899	-25.237	74.000	17.864	PK
4			12390.000	47.197	29.389	-26.803	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz with OAW-AP1361 (CDD Mode)	

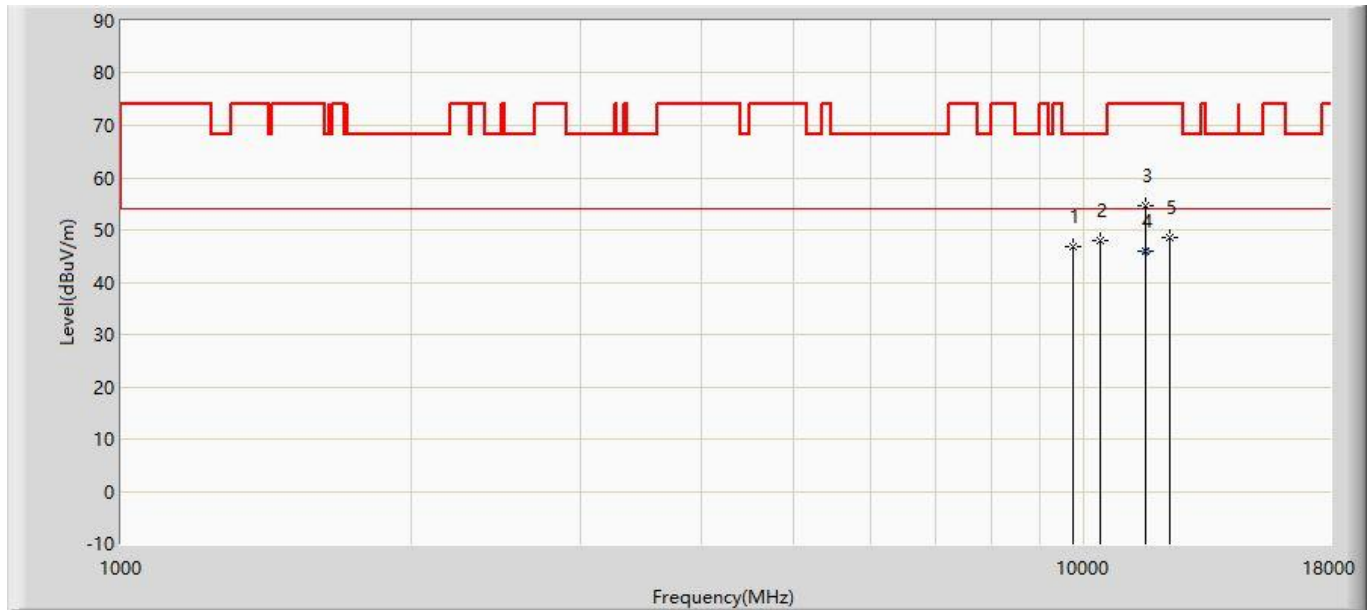


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9729.500	46.693	32.320	-21.507	68.200	14.373	PK
2			10375.500	48.006	31.537	-20.194	68.200	16.470	PK
3			11582.500	54.603	36.591	-19.397	74.000	18.012	PK
4		*	11582.500	45.926	27.914	-8.074	54.000	18.012	AV
5			12262.500	48.612	30.800	-25.388	74.000	17.811	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz with OAW-AP1361 (CDD Mode)	

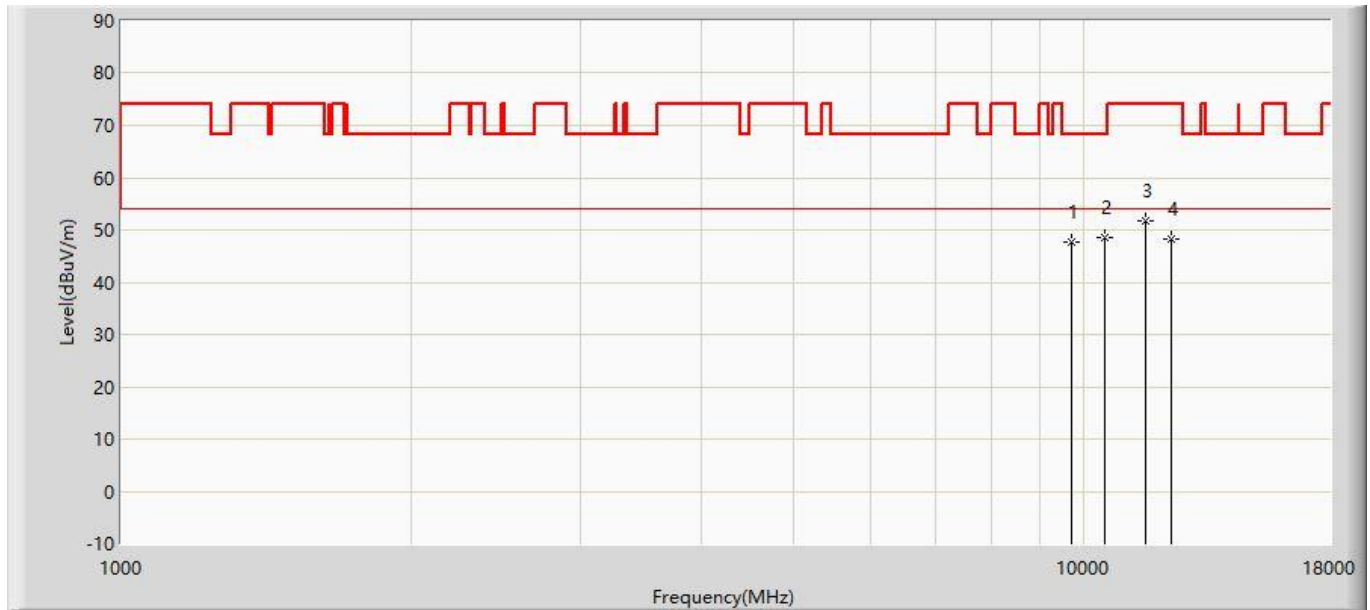


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	47.810	33.521	-20.390	68.200	14.289	PK
2		*	10494.500	48.558	31.709	-19.642	68.200	16.849	PK
3			11591.000	51.627	33.619	-22.373	74.000	18.008	PK
4			12305.000	48.405	30.594	-25.595	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz with OAW-AP1361 (CDD Mode)	

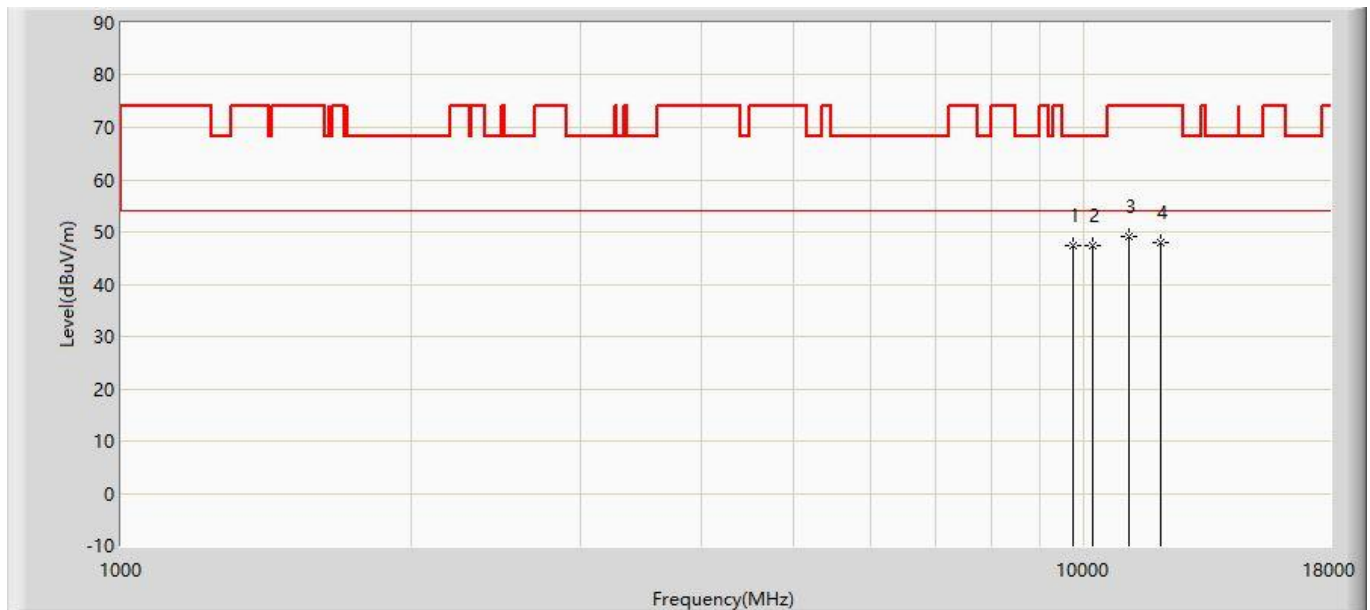


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9738.000	47.389	32.988	-20.811	68.200	14.401	PK
2			10197.000	47.310	31.416	-20.890	68.200	15.894	PK
3			11149.000	49.264	31.544	-24.736	74.000	17.720	PK
4			12024.500	47.967	30.148	-26.033	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz with OAW-AP1361 (CDD Mode)	

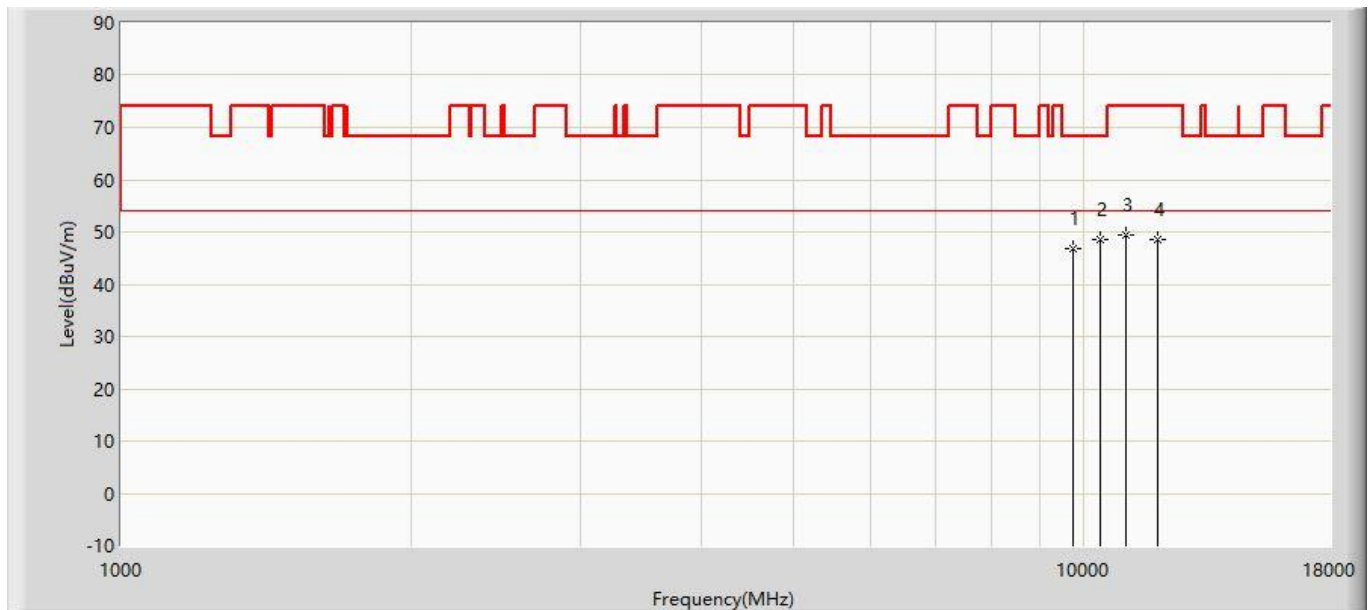


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	46.791	32.362	-21.409	68.200	14.428	PK
2		*	10384.000	48.609	32.113	-19.591	68.200	16.496	PK
3			11038.500	49.493	31.877	-24.507	74.000	17.616	PK
4			11905.500	48.608	30.744	-25.392	74.000	17.863	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz with OAW-AP1361 (CDD Mode)	

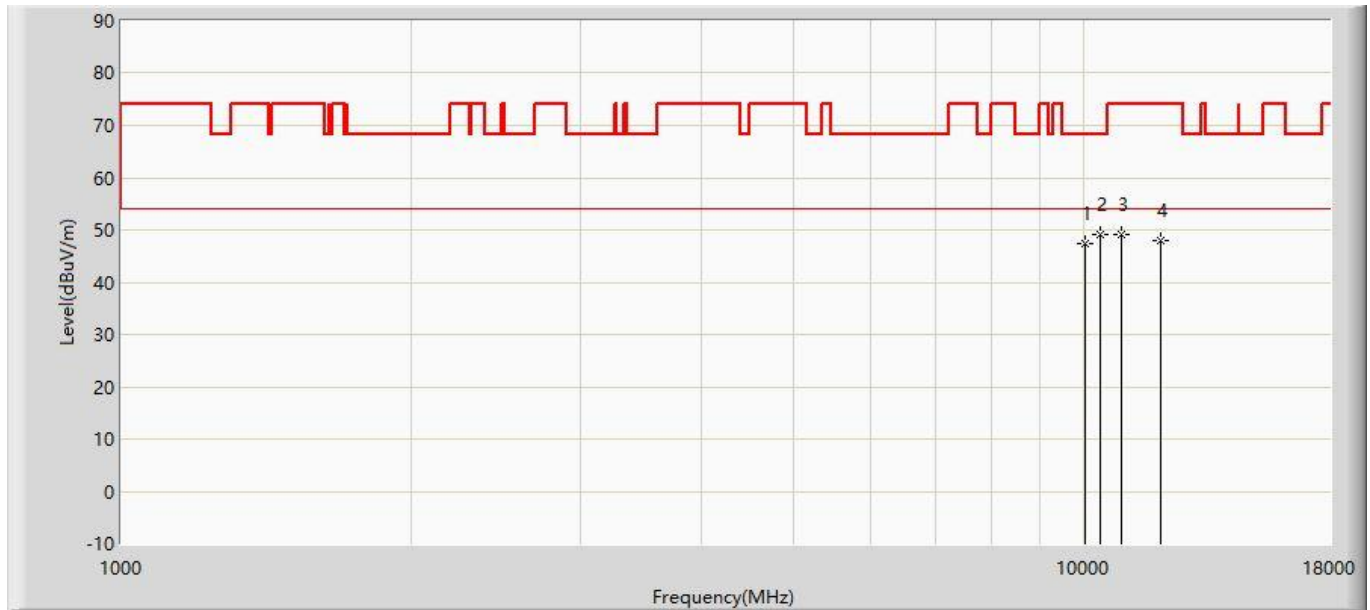


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10027.000	47.491	32.144	-20.709	68.200	15.347	PK
2		*	10392.500	49.275	32.752	-18.925	68.200	16.524	PK
3			10945.000	48.986	31.484	-25.014	74.000	17.502	PK
4			12024.500	47.874	30.055	-26.126	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz with OAW-AP1361 (CDD Mode)	

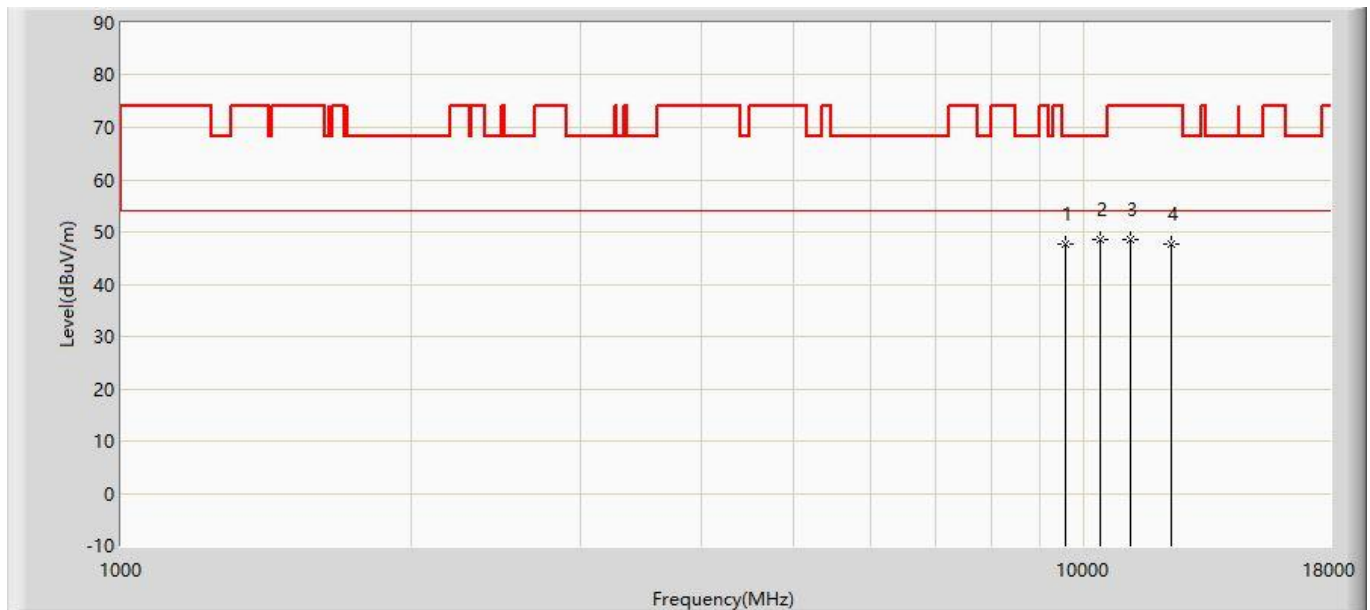


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9576.500	47.818	33.947	-20.382	68.200	13.871	PK
2		*	10384.000	48.602	32.106	-19.598	68.200	16.496	PK
3			11191.500	48.617	30.857	-25.383	74.000	17.760	PK
4			12305.000	47.765	29.954	-26.235	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz with OAW-AP1361 (CDD Mode)	

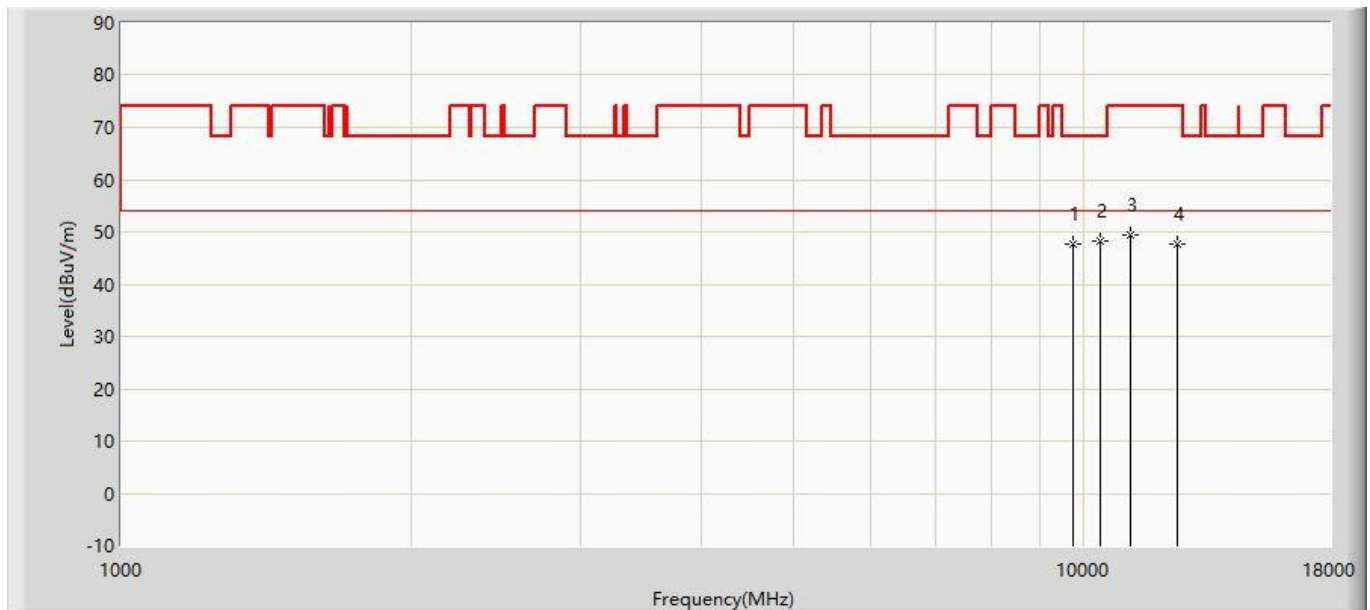


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9755.000	47.770	33.314	-20.430	68.200	14.456	PK
2		*	10392.500	48.405	31.882	-19.795	68.200	16.524	PK
3			11183.000	49.393	31.641	-24.607	74.000	17.752	PK
4			12492.000	47.647	29.842	-26.353	74.000	17.805	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz with OAW-AP1361 (CDD Mode)	

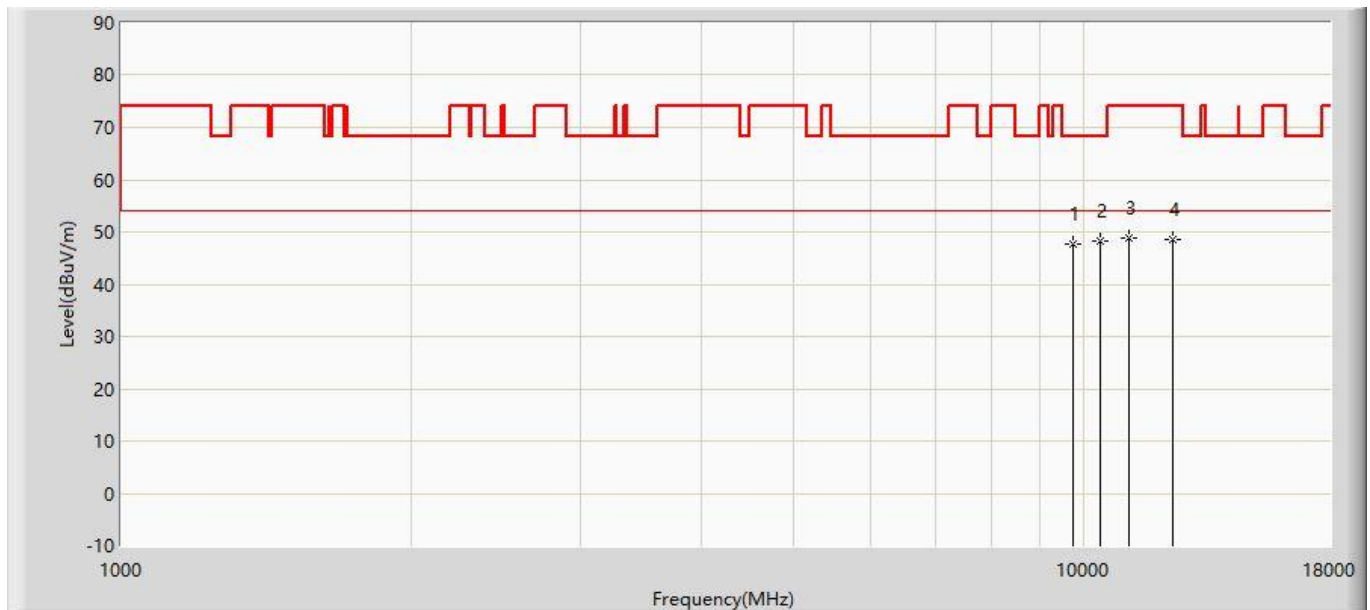


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9755.000	47.770	33.314	-20.430	68.200	14.456	PK
2		*	10409.500	48.243	31.664	-19.957	68.200	16.579	PK
3			11149.000	48.861	31.141	-25.139	74.000	17.720	PK
4			12381.500	48.448	30.639	-25.552	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz with OAW-AP1361 (CDD Mode)	

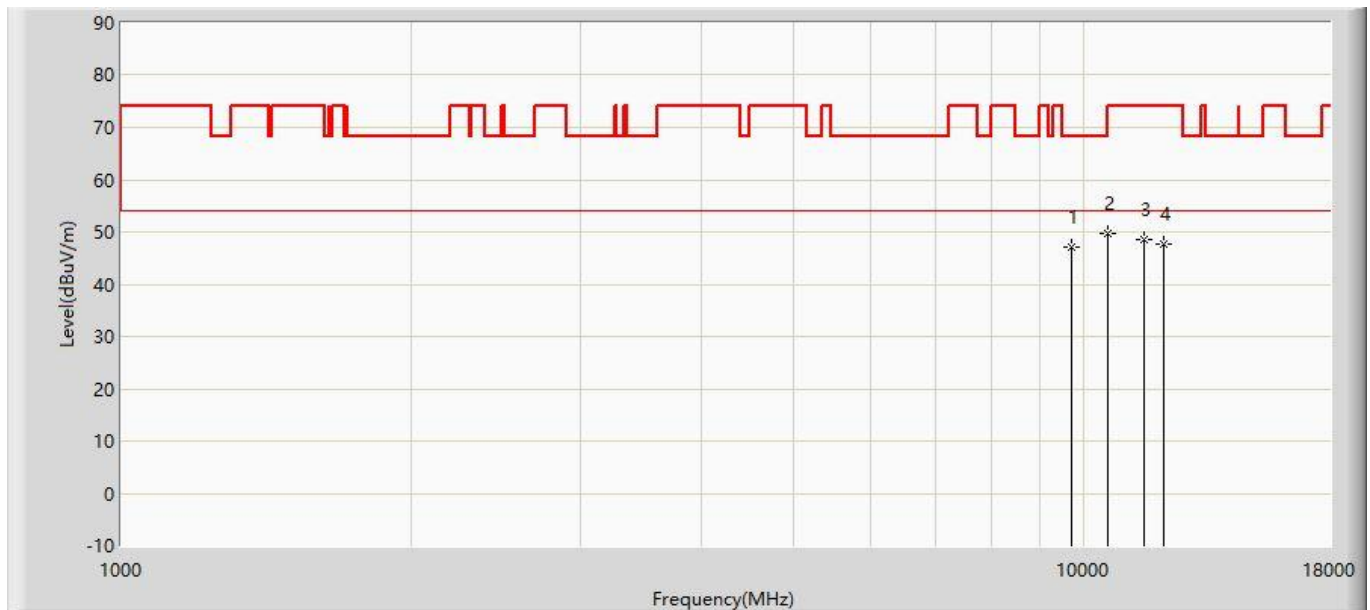


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	46.988	32.699	-21.212	68.200	14.289	PK
2		*	10571.000	49.750	32.779	-18.450	68.200	16.971	PK
3			11540.000	48.592	30.560	-25.408	74.000	18.032	PK
4			12084.000	47.634	29.816	-26.366	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz with OAW-AP1361 (CDD Mode)	

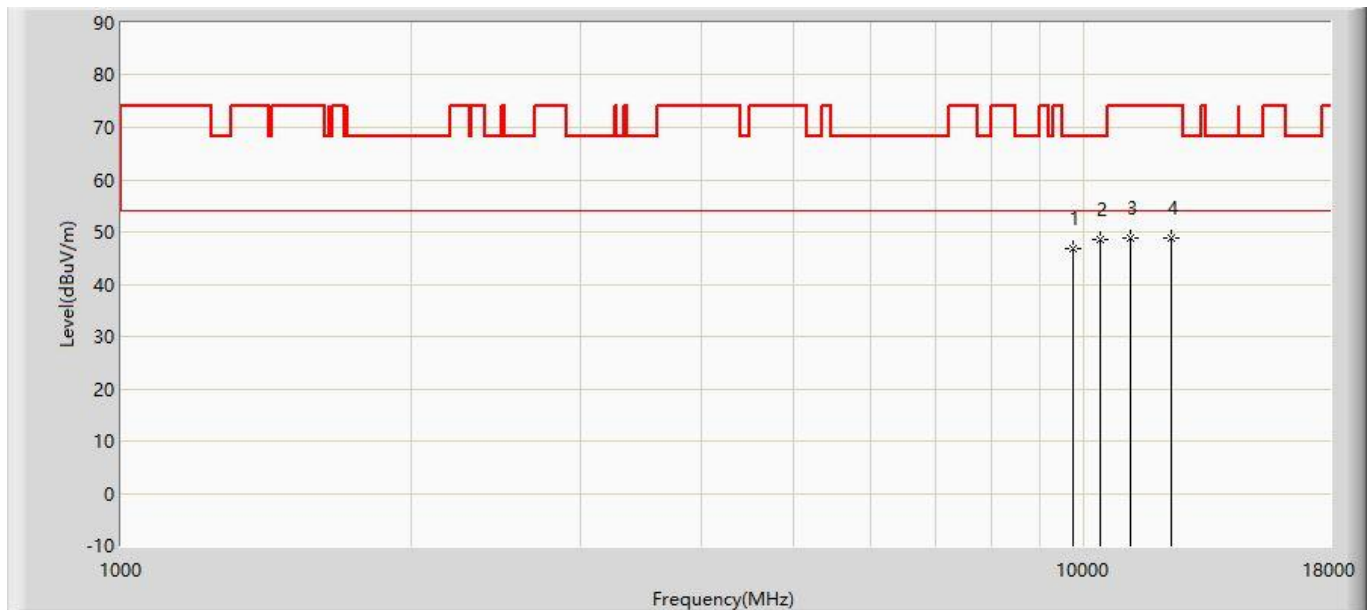


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	46.864	32.463	-21.336	68.200	14.401	PK
2		*	10392.500	48.561	32.038	-19.639	68.200	16.524	PK
3			11157.500	48.833	31.105	-25.167	74.000	17.728	PK
4			12296.500	48.806	30.995	-25.194	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5690MHz with OAW-AP1361 (CDD Mode)	

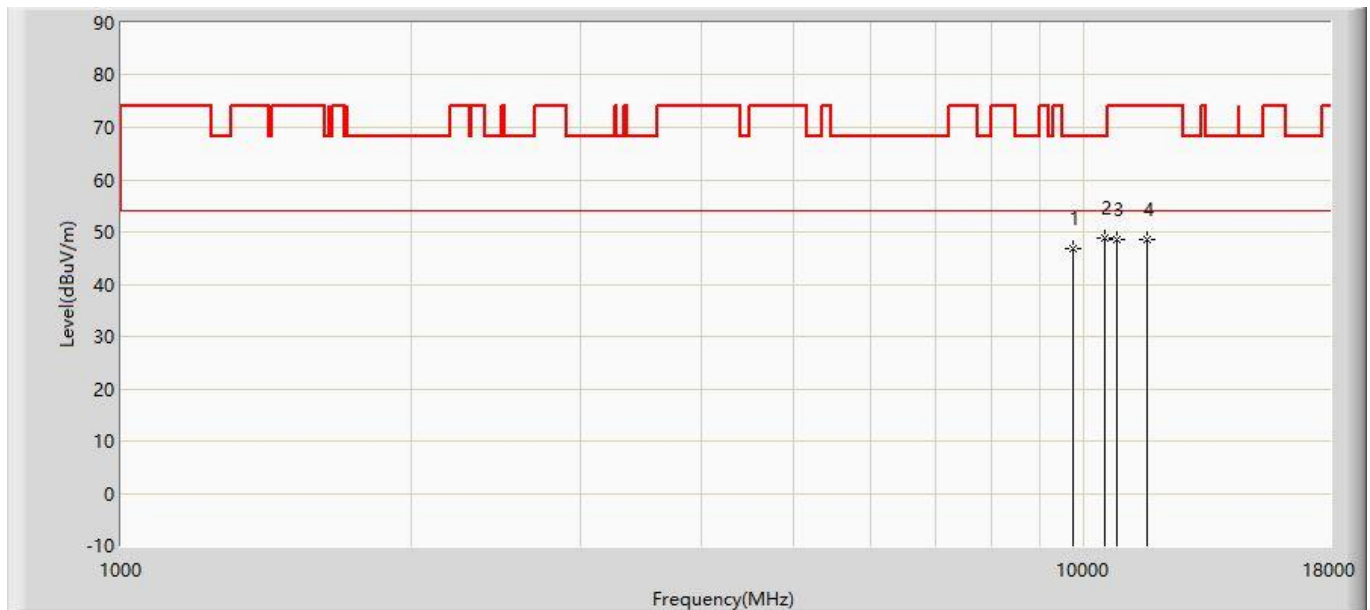


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	46.727	32.298	-21.473	68.200	14.428	PK
2		*	10494.500	48.746	31.897	-19.454	68.200	16.849	PK
3			10834.500	48.666	31.321	-25.334	74.000	17.345	PK
4			11633.500	48.584	30.595	-25.416	74.000	17.989	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5690MHz with OAW-AP1361 (CDD Mode)	

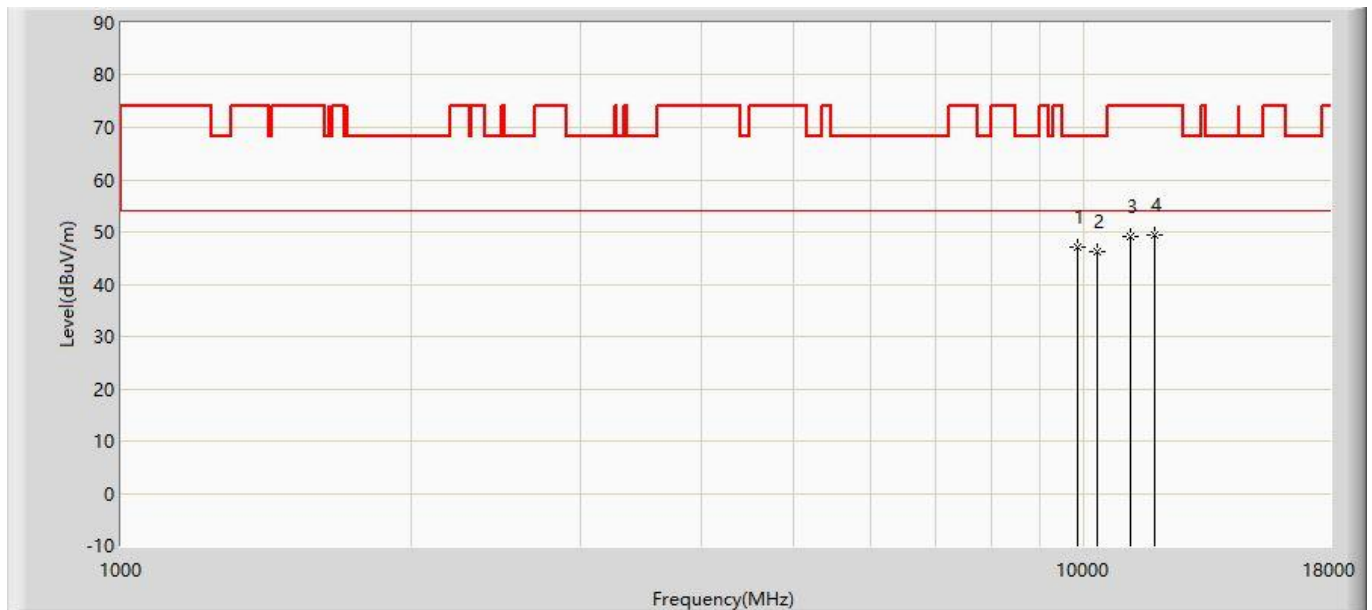


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9857.000	47.062	32.272	-21.138	68.200	14.790	PK
2			10316.000	46.117	29.839	-22.083	68.200	16.278	PK
3			11157.500	49.148	31.420	-24.852	74.000	17.728	PK
4			11829.000	49.463	31.564	-24.537	74.000	17.899	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz with OAW-AP1361 (CDD Mode)	

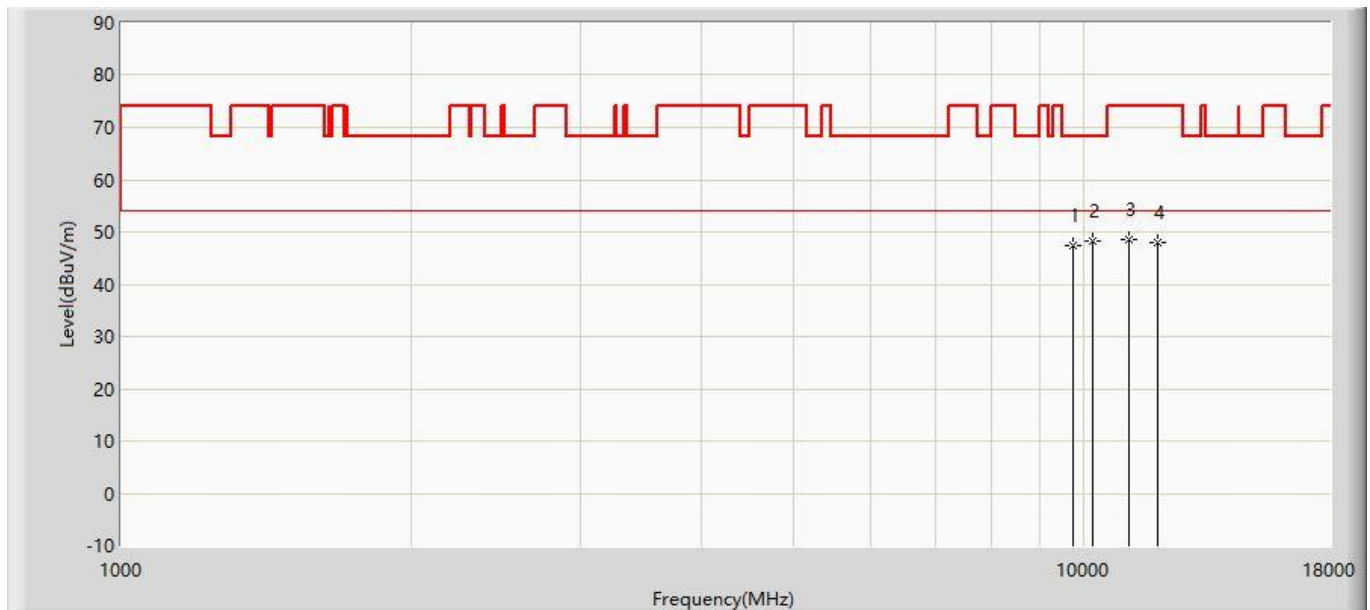


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	47.353	32.924	-20.847	68.200	14.428	PK
2		*	10205.500	48.117	32.195	-20.083	68.200	15.922	PK
3			11140.500	48.669	30.956	-25.331	74.000	17.712	PK
4			11931.000	47.971	30.120	-26.029	74.000	17.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz with OAW-AP1361 (CDD Mode)	

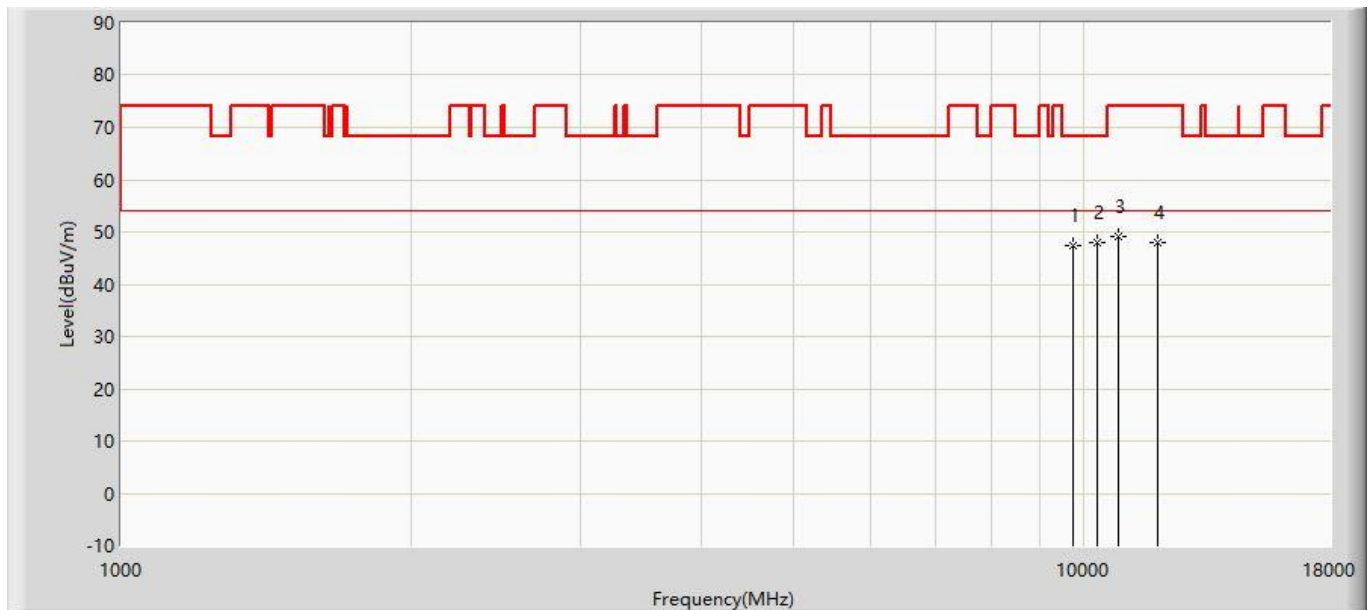


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	47.353	32.924	-20.847	68.200	14.428	PK
2		*	10324.500	48.003	31.698	-20.197	68.200	16.305	PK
3			10860.000	49.050	31.669	-24.950	74.000	17.381	PK
4			11931.000	48.051	30.200	-25.949	74.000	17.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

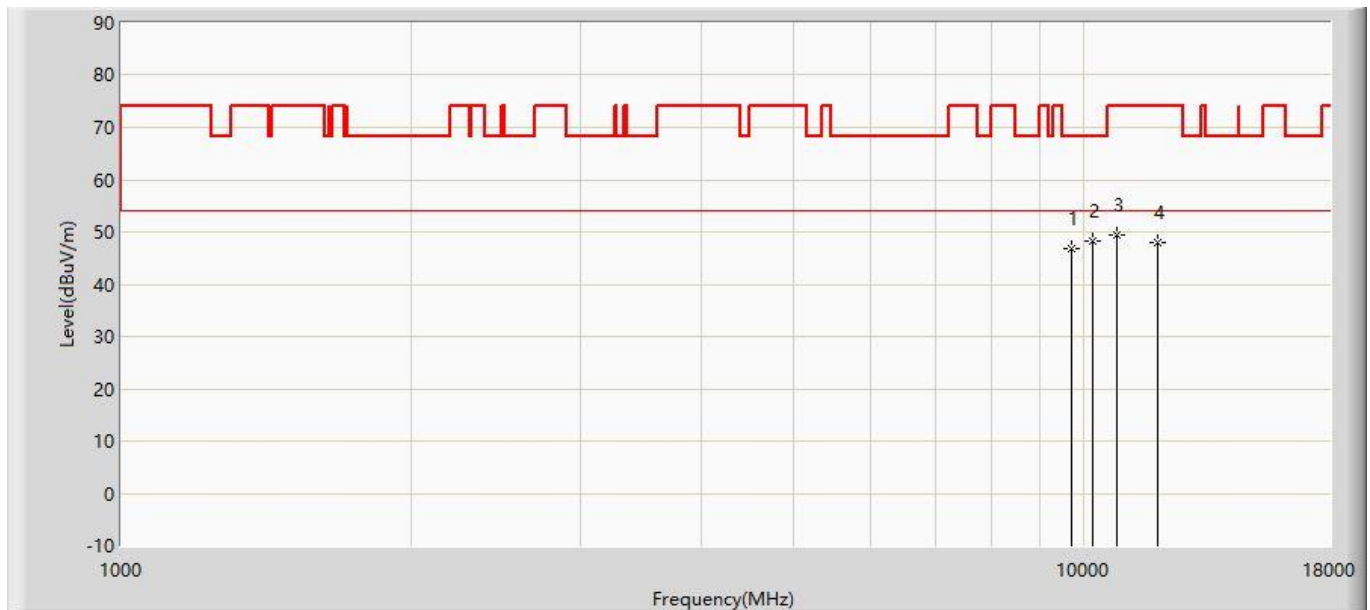


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9695.500	46.892	32.631	-21.308	68.200	14.261	PK
2		*	10214.000	48.312	32.363	-19.888	68.200	15.949	PK
3			10834.500	49.556	32.211	-24.444	74.000	17.345	PK
4			11931.000	48.051	30.200	-25.949	74.000	17.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

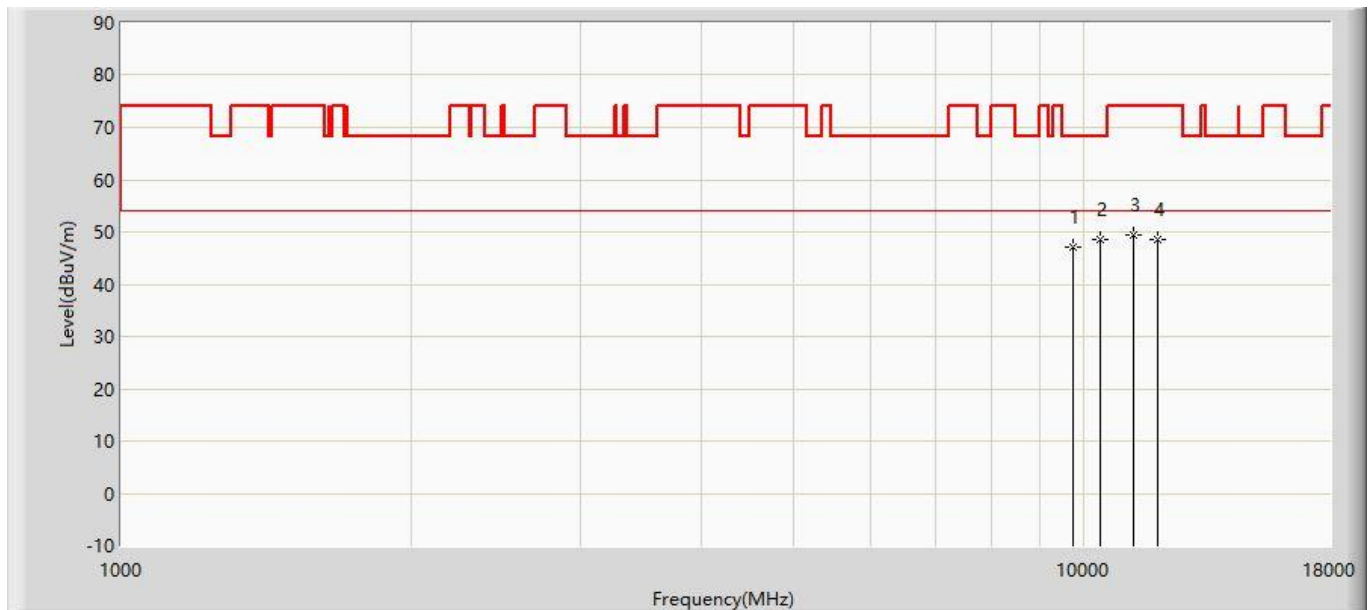

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	47.049	32.648	-21.151	68.200	14.401	PK
2		*	10392.500	48.679	32.156	-19.521	68.200	16.524	PK
3			11268.000	49.291	31.459	-24.709	74.000	17.832	PK
4			11914.000	48.525	30.665	-25.475	74.000	17.860	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).