MRT Technology (Taiwan) Co., Ltd
Phone: +886-03-3288388
Fax: +886-03-3288918
Web: www.mrt-cert.com

Report No.: 2101TW0003-T4
Report Version: 1.0
Issue Date: 2021-09-23

NCC

低功率射頻器材型式試驗報告

產品名稱	：ACCESS POINT
型號	：APIN0635
廠牌	：
申請者	：慧與科技股份有限公司
申請者地址	：臺北市南港區經貿二路 66 號 10 樓之 1
測試標準	：LP0002 (109 年版)
參考法規	：ANSI C63.10-2013
測試結果	：符合
接收日期	：2021.01.13
測試日期	：2021.01.13 ~ 2021.09.14

測試工程師 ： (許丞哲)

報告審核人 ： (陳柏均)

報告簽署人 ： (柯承志)

Testing Laboratory
3261

本測試報告僅對實驗室所受測之樣品負責
本測試報告非經本公司同意不可局部複製使用

修訂紀錄

報告編號	版本	描述	發行日期
2101TW0003-T4	1.0	Original Report	2021-09-23

CONTENTS

Description **Page**

1. 一般資訊 5

2. 產品描述 6

2.1 產品資訊 6

2.2 產品規格 7

2.3 測試模式 8

2.4 測試配置 9

2.6 操作程序 9

3. 測試設備明細 10

4. 量測不確定度 11

5. 測試結果 12

5.1.1 量測方法 *13*

5.1.2 限制要求 *13*

5.1.3 測試架構圖 *13*

5.1.4 電源端點測試結果 *14*

5.2 峰值傳導輸出功率 16

5.2.1 量測方法 *16*

5.2.2 限制要求 *16*

5.2.3 測試架構圖 *17*

5.2.4 峰值傳導輸出功率測試結果 *18*

5.3 天線之要求 24

5.3.1 限制要求 *24*

5.3.2 天線樣式 *24*

5.4 輻射電場強度 25

5.4.1 量測方法 *25*

5.4.2 限制要求 *25*

5.4.3 測試架構圖 *26*

5.4.4 輻射電場強度測試結果 *28*

5.5 頻帶邊緣 192

5.5.1 量測方法 *192*

5.5.2 限制要求 *192*

5.5.3 測試架構圖 *193*

5.5.4 頻帶邊緣測試結果 *195*

5.6 占用頻寬 361

5.6.1 量測方法 *361*

5.6.2 限制要求 *361*
5.6.3 測試架構圖 *361*
5.6.4 占用頻寬測試結果 *362*
5.7. 功率頻譜密度 381
5.7.1 量測方法 *381*
5.7.2 限制要求 *381*
5.7.3 測試架構圖 *381*
5.7.4 峰值功率頻譜密度測試結果 *382*

1. 一般資訊

申請者	慧與科技股份有限公司
申請者地址	臺北市南港區經貿二路 66 號 10 樓之 1
製造商	Hewlett Packard Enterprise Company
製造商地址	3333 Scott Blvd, Santa Clara, CA 95054, USA
實驗室	台灣曼瑞檢測科技有限公司
實驗室地址	33377 台灣桃園市龜山區復興二路 38 號
實驗室資訊	**1.** MRT facility is a FCC registered (Reg. No. 153292) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm. **2.** MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada. **3.** MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.
實驗室測試環境條件	溫度 (°C) : 20-35 / 濕度 (%RH) : 30-65

2. 產品描述

2.1 產品資訊

產品名稱	ACCESS POINT
產品型號	APIN0635
待測物額定電壓	AC Adapter or PoE input
無線規格	802.11a/n/ac/ax
頻率範圍	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz
調變模式	802.11a/n/ac: OFDM 802.11ax: OFDMA
傳輸速率	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps 802.11ax: up to 1201Mbps
頻道控制	Auto

Note:

1. For other features of this EUT, test report will be issued separately.

2. 廠牌差異為因市場銷售需求，產品外觀、軟體、其餘電路設計、印刷電路板等等並無變更(上述差異說明為廠商宣告)。

2.2 產品規格

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz


802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

2.3 測試模式

Test Mode	Mode 1: 發射器 802.11a (6Mbps)
	Mode 2: 發射器 802.11ac-VHT20 (MCS0)
	Mode 3: 發射器 802.11ac-VHT40 (MCS0)
	Mode 4: 發射器 802.11ac-VHT80 (MCS0)
	Mode 5: 發射器 802.11ax-HE20 (MCS0)
	Mode 6: 發射器 802.11ax-HE40 (MCS0)
	Mode 7: 發射器 802.11ax-HE80 (MCS0)

2.4 測試配置

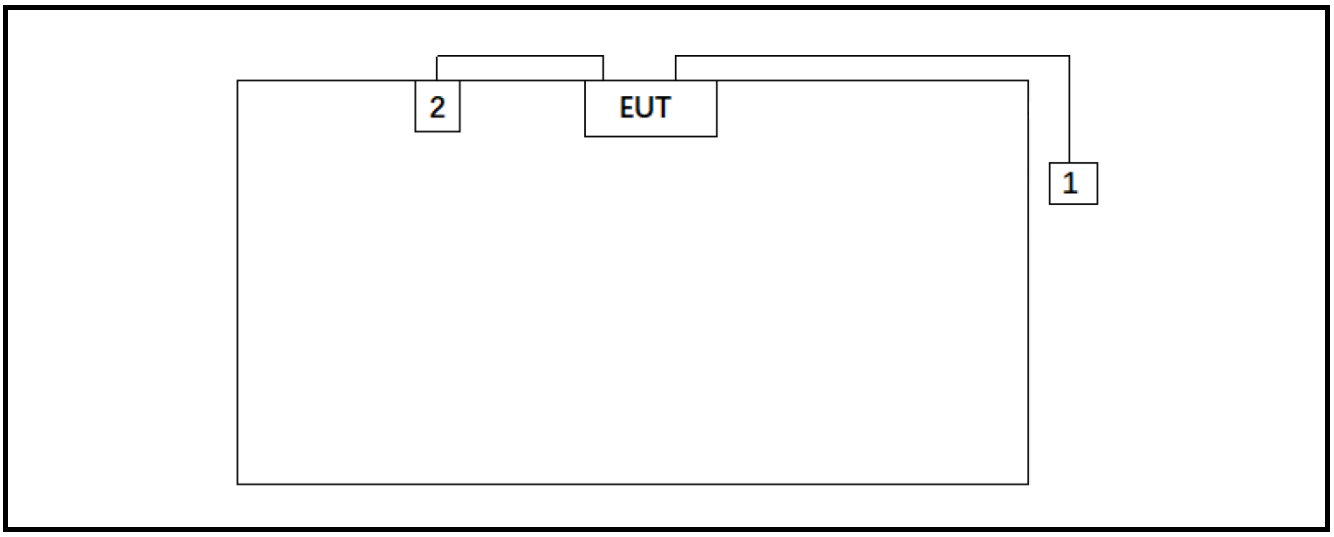

2.5 測試周邊

待測裝置測試時，其搭配系統測試時之週邊裝置包括如下:

Product		Manufacturer	Model No.
1	Notebook	DELL	Precision 3510
2	AC Adapter	aruba	DB-48A12

2.6 操作程序

1.	Turn on the power of all equipment.
2.	Execute “QSPR” program
3.	Configure the test channel and the data rate.
4.	Start test.

3. 測試設備明細

傳導干擾 -SR2

儀器名稱	廠牌	型號	財產編號	校正週期	有效日期
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2022/3/23
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2022/4/28
8-Wire ISN (T8)	R&S	ENY81	MRTTWA00018	1 year	2022/5/30
Cable	Rosnol	N1C50-RG400-B1C50-500CM	MRTTWE00013	1 year	2022/6/20
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2022/3/24

輻射干擾 – AC1

儀器名稱	廠牌	型號	財產編號	校正週期	有效日期
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2021/10/5
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2022/3/24
Acitve Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2022/5/6
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2022/4/21
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2022/4/28
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2022/4/26
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2022/4/21
Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2022/6/15

傳導量測設備 –SR2

儀器名稱	廠牌	型號	財產編號	校正週期	有效日期
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2021/10/14
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2022/7/19
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2022/3/24

EMI 測試軟體

軟體名稱	廠牌	版本
e3	Audix	9.160520a
EMI	Quietek	V3

4. 量測不確定度

電源傳導量測-電源線 (Conducted Emission- Power Line)
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 0.15MHz~30MHz: ± 2.53dB
輻射干擾量測 (Radiated Spurious Emission)
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 9kHz~30MHz: ± 3.92dB 30MHz~1GHz: ± 4.25dB 1GHz~18GHz: ± 4.40dB 18GHz~40GHz: ± 4.45dB
頻率誤差量測 (Frequency Error)
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): ±78.4Hz
傳導功率量測 (Conducted Power)
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): ± 0.84dB
傳導干擾量測 (Conducted Spurious Emission)
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): ± 2.65 dB
佔用頻寬量測 (Occupied Bandwidth)
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 3.3%
溫度 / 濕度 (Temp. / Humidity)
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): ±0.82°C/ ±3%
直流電源 (DC Voltage)
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): ±0.3%

5. 測試結果

章節	量測項目	限制值	測試結果	測試數據
3.3	電源傳導	低功率射頻器材技術規範 3.3 節	符合	第 5.1 章節
5.7.3.1 (A) 5.7.3.3 (A)	峰值傳導輸出功率	≦ 30.00dBm	符合	第 5.2 章節
5.7.3.1 5.7.3.3	天線之要求	低功率射頻器材技術規範	符合	第 5.3 章節
3.6	輻射電場強度	低功率射頻器材技術規範 3.6 節	符合	第 5.5 章節
3.5 5.7.4.2	頻帶邊緣	≦ 74dBuV/m(Peak) ≦ 54dBuV/m(Average)	符合	第 5.6 章節
5.7.3.4 (B,C) 5.7.5	占用頻寬	≧ 500KHz (6dB Bandwidth)	符合	第 5.7 章節
5.7.3.1 (B) 5.7.3.3 (2)	功率頻譜密度	≦ 1MHz / 17dBm ≦ 500kHz / 30dBm	符合	第 5.8 章節

Notes:

1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2) For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
3) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
4) Test Items “26dB Bandwidth” & “6dB Bandwidth” showed the worst test data in this report.
5) EUT supports one configuration only in 802.11ax full RU mode.
6) This product has two filter configurations (Type A and Type B) which difference is manufacturer and RF output power is basically the same after evaluation. We choose Type A filter to perform all RF testing and choose Type B filter to perform spot check testing (output power and radiated spurious emission).

5.1 電源傳導測試

5.1.1 量測方法

待測物放置於1m*2m*0.8m之非導體桌面並離垂直牆面40cm（落地型產品置於地上），將待測物之電源線接至電源阻抗網路器(LISN)，同時保持待測物至LISN距80公分，並將電源線多餘部份以30至40公分之八字形捆綁於電源線中央並離地40cm，於在正常工作狀態下，執行待測物之火線(Line)及地線(neutral)各一次量測。

電源端點場強之測量範圍由 0.15MHz –30MHz，所量測之讀值皆為準尖峰值(Quasi-Peak Value)及平均值(Average Value)。 場強接收機之解析頻寬為9kHz。

備 註: 經初測驗證過，電源端點干擾測試對測試頻道數並無差異，因此檢附其中一個測試頻道之測試數。


5.1.2 限制要求

以市電為電源之低功率射頻器材，其傳導回電源線上頻率自150kHz至30MHz之射頻電壓(在電源端子每一電源線對接地點)應小於或等於下表所列之限值。測量時應經過50微亨利(μH)及50歐姆(Ω)之電源線阻抗模擬網路(LISN)。頻率重疊處，以較低限值為準。

Frequency 頻率範圍 MHz	傳導限制值(dBuV)	
	準尖峰值	平均值
0.15 - 0.50	66-56(註)	56-46(註)
0.50-5.0	56	46
5.0 - 30	60	50


註:隨頻率之對數遞減

5.1.3 測試架構圖

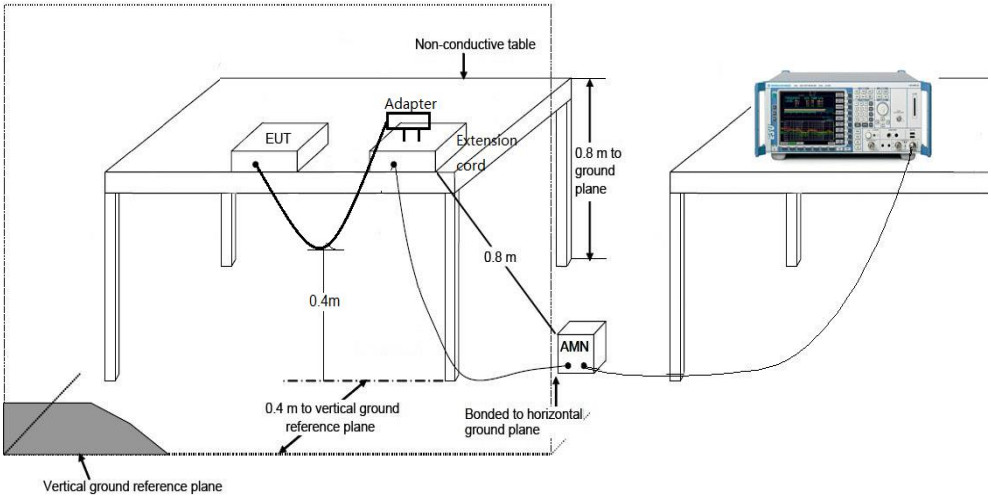

5.1.4 電源端點測試結果

EUT	ACCESS POINT	Date of Test	2021-04-27
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.6°C/60.9%
Polarity	Line1	Site / Test Engineer	SR2 / Eric Lin
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	110V/60Hz

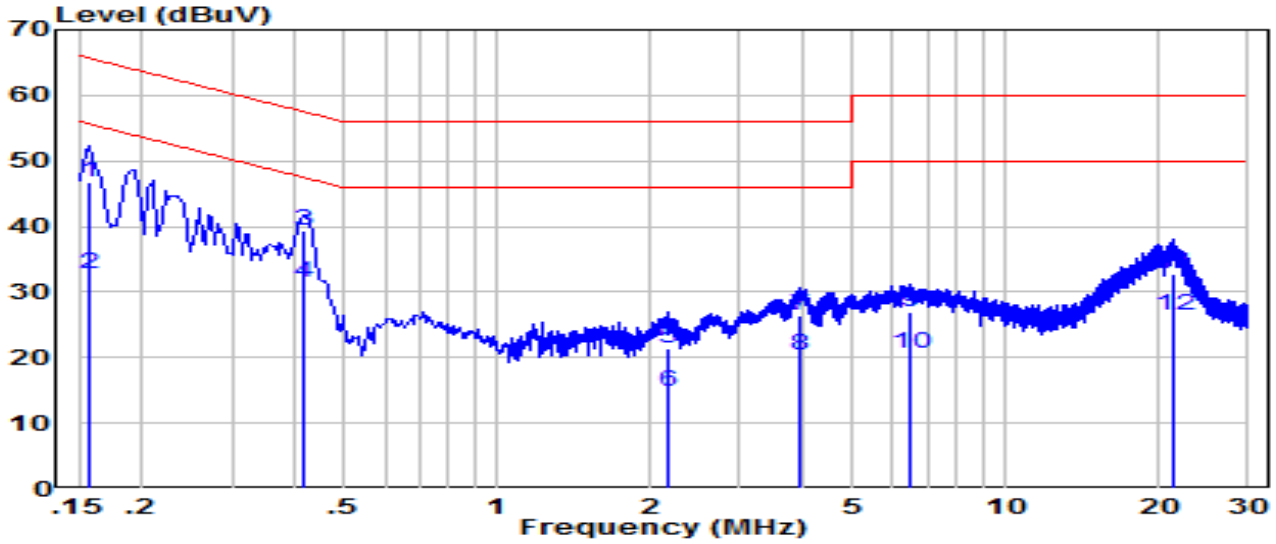


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		0.158	37.13	9.61	46.74	-18.83	65.57	QP
2		0.158	23.03	9.61	32.64	-22.93	55.57	Average
3		0.413	29.86	9.63	39.49	-18.10	57.59	QP
4	*	0.413	21.76	9.63	31.39	-16.20	47.59	Average
5		2.170	11.58	9.69	21.27	-34.73	56.00	QP
6		2.170	4.98	9.69	14.67	-31.33	46.00	Average
7		3.940	16.72	9.72	26.44	-29.56	56.00	QP
8		3.940	10.52	9.72	20.24	-25.76	46.00	Average
9		6.450	17.18	9.78	26.96	-33.04	60.00	QP
10		6.450	10.78	9.78	20.56	-29.44	50.00	Average
11		21.420	22.88	10.00	32.88	-27.12	60.00	QP
12		21.420	16.48	10.00	26.48	-23.52	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = ISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-04-27
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.6°C/60.9%
Polarity	Neutral	Site / Test Engineer	SR2 / Eric Lin
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	110V/60Hz

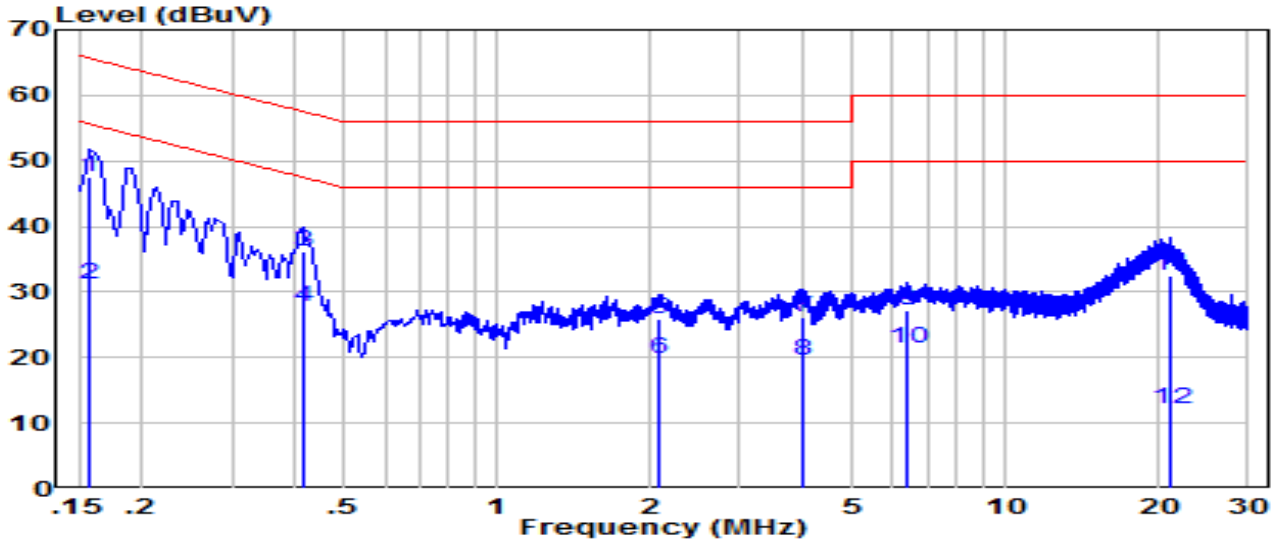

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.158	37.92	9.62	47.54	-18.03	65.57	QP
2		0.158	21.62	9.62	31.24	-24.33	55.57	Average
3		0.414	26.46	9.64	36.09	-21.48	57.57	QP
4		0.414	18.06	9.64	27.69	-19.88	47.57	Average
5		2.090	16.08	9.69	25.77	-30.23	56.00	QP
6		2.090	10.08	9.69	19.77	-26.23	46.00	Average
7		4.000	16.32	9.73	26.05	-29.95	56.00	QP
8		4.000	9.72	9.73	19.45	-26.55	46.00	Average
9		6.360	17.38	9.79	27.17	-32.83	60.00	QP
10		6.360	11.58	9.79	21.37	-28.63	50.00	Average
11		21.080	22.43	10.09	32.51	-27.49	60.00	QP
12		21.080	2.13	10.09	12.21	-37.79	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = ISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

5.2 峰值傳導輸出功率

5.2.1 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀RF輸入端，設定頻譜分析儀之解析度頻寬大於6dB發射頻寬或使用峰值功率表。除使用上述測量方式外,並得使用以最大傳導輸出功率作為測量方式(最大傳導輸出功率必須使用依據均方根等效電壓校準之儀器測量於任何連續傳輸之時段，測量結果須依儀器限制(如偵測器反應時間、相較於發射頻寬有限之解析頻寬能力，靈敏度等)調整得出正確之峰值測量。

5.2.2 限制要求

1. 使用於5.15 GHz～5.25 GHz 頻段

(1)供戶外操作使用:

(A)最大傳導輸出功率應小於或等於1 W。

(B)在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於17 dBm。

(C)使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(D)在水平面仰角超過30 度時，其最大EIRP 應小於或等於21 dBm。

(2)供室內操作使用:

(A)最大傳導輸出功率應小於或等於1 W。

(B)在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於17 dBm。

(C)使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3)供固定式點對點操作使用:

(A)最大傳導輸出功率應小於或等於1 W。

(B)在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於17 dBm。

(C)使用超過23 dBi 方向增益之指向性天線時，應依超過23 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(D)固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4)供用戶端裝置(Client Device)操作使用:

(A)最大傳導輸出功率應小於或等於250 mW。

(B)在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於11 dBm。

(C)使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 使用頻率於5.25 GHz～5.35 GHz 與5.470 GHz～5.725 GHz 頻段

(1)最大傳導輸出功率應小於或等於250 mW或11dBm+10log B (B 是26 dB發射頻寬，單位MHz)之較小者。

(2)最大功率頻譜密度在任何1 MHz 頻帶中應小於或等於11 dBm。

(3)使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。


3. 使用頻率於5.725 GHz～5.850 GHz 頻段

(1)最大傳導輸出功率應小於或等於1 W。

(2)在任何500 kHz 頻帶中最大功率頻譜密度應小於或等於30 dBm。

(3)供固定式點對點操作時，使用方向增益超過6 dBi 之發射天線，可不需(4)除(3)外，使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

5.2.3 測試架構圖

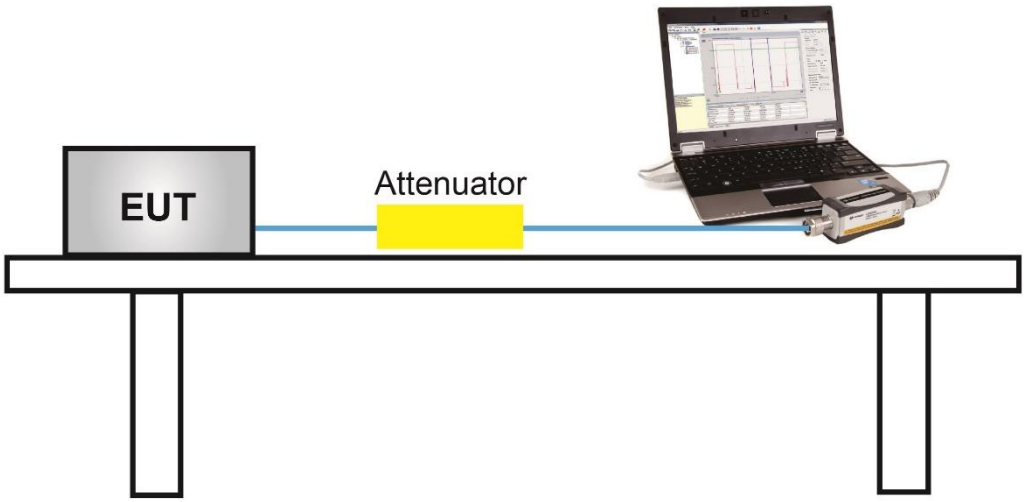

5.2.4 峰值傳導輸出功率測試結果

待測物名稱	ACCESS POINT	溫度	23 ~ 25°C
測試工程師	Kevin Ker	濕度	46 ~ 56%
測試場地	SR1	測試日期	2021/03/07
測試模式	Filter A		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11a	6Mbps	36	5180	17.96	18.45	21.22	≤ 30.00	Pass
11a	6Mbps	44	5220	18.42	18.76	21.60	≤ 30.00	Pass
11a	6Mbps	48	5240	18.72	19.21	21.98	≤ 30.00	Pass
11a	6Mbps	52	5260	16.05	16.58	19.33	≤ 23.69	Pass
11a	6Mbps	60	5300	16.12	16.78	19.47	≤ 23.69	Pass
11a	6Mbps	64	5320	16.21	16.84	19.55	≤ 23.69	Pass
11a	6Mbps	100	5500	16.32	16.94	19.65	≤ 23.69	Pass
11a	6Mbps	120	5600	16.22	16.76	19.51	≤ 23.69	Pass
11a	6Mbps	140	5700	16.26	16.73	19.51	≤ 23.69	Pass
11a	6Mbps	144	5720	16.31	16.84	19.59	≤ 22.63	Pass
11a	6Mbps	149	5745	18.24	18.56	21.41	≤ 30.00	Pass
11a	6Mbps	157	5785	18.22	18.47	21.36	≤ 30.00	Pass
11a	6Mbps	165	5825	18.33	18.56	21.46	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	18.03	18.54	21.30	≤ 30.00	Pass
11ac-VHT20	MSC0	40	5220	18.26	18.63	21.46	≤ 30.00	Pass
11ac-VHT20	MCS0	48	5240	17.98	18.45	21.23	≤ 30.00	Pass
11ac-VHT20	MSC0	52	5260	16.52	16.82	19.68	≤ 23.98	Pass
11ac-VHT20	MCS0	60	5300	16.31	16.88	19.61	≤ 23.98	Pass
11ac-VHT20	MSC0	64	5320	16.37	17.02	19.72	≤ 23.98	Pass
11ac-VHT20	MCS0	100	5500	16.35	16.78	19.58	≤ 23.98	Pass
11ac-VHT20	MSC0	120	5600	16.31	16.59	19.46	≤ 23.98	Pass
11ac-VHT20	MCS0	140	5700	16.39	16.73	19.57	≤ 23.98	Pass
11ac-VHT20	MSC0	144	5720	16.37	16.84	19.62	≤ 22.82	Pass
11ac-VHT20	MCS0	149	5745	18.14	18.56	21.37	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	17.95	18.42	21.20	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	17.86	18.23	21.06	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ac-VHT40	MCS0	38	5190	17.48	17.57	20.54	≤ 30.00	Pass
11ac-VHT40	MCS0	46	5230	18.15	18.59	21.39	≤ 30.00	Pass
11ac-VHT40	MCS0	54	5270	17.45	17.90	20.69	≤ 23.98	Pass
11ac-VHT40	MCS0	62	5310	17.45	17.64	20.56	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	16.42	16.82	19.63	≤ 23.98	Pass
11ac-VHT40	MCS0	118	5590	17.78	18.14	20.97	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	17.77	17.85	20.82	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	17.54	17.87	20.72	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	17.64	18.16	20.92	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	17.84	18.40	21.14	≤ 30.00	Pass
11ac-VHT80	MCS0	42	5210	16.77	17.18	19.99	≤ 30.00	Pass
11ac-VHT80	MCS0	58	5290	16.28	16.74	19.53	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	14.84	15.07	17.97	≤ 23.98	Pass
11ac-VHT80	MCS0	122	5610	17.00	17.33	20.18	≤ 23.98	Pass
11ac-VHT80	MCS0	138	5690	17.01	17.24	20.14	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	16.35	16.91	19.65	≤ 30.00	Pass
11ax-HE20	MCS0	36	5180	18.04	18.28	21.17	≤ 30.00	Pass
11ax-HE20	MCS0	44	5220	18.39	18.53	21.47	≤ 30.00	Pass
11ax-HE20	MCS0	48	5240	18.12	18.45	21.30	≤ 30.00	Pass
11ax-HE20	MCS0	52	5260	16.72	17.05	19.90	≤ 23.98	Pass
11ax-HE20	MCS0	60	5300	16.41	17.07	19.76	≤ 23.98	Pass
11ax-HE20	MCS0	64	5320	16.54	17.14	19.86	≤ 23.98	Pass
11ax-HE20	MCS0	100	5500	16.67	16.92	19.81	≤ 23.98	Pass
11ax-HE20	MCS0	120	5600	16.98	17.10	20.05	≤ 23.98	Pass
11ax-HE20	MCS0	140	5700	16.83	16.95	19.90	≤ 23.98	Pass
11ax-HE20	MCS0	144	5720	16.57	16.87	19.73	≤ 22.85	Pass
11ax-HE20	MCS0	149	5745	18.02	18.73	21.40	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	17.94	18.50	21.24	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	17.92	18.31	21.13	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ax-HE40	MCS0	38	5190	16.76	17.55	20.18	≤ 30.00	Pass
11ax-HE40	MCS0	46	5230	18.19	18.49	21.35	≤ 30.00	Pass
11ax-HE40	MCS0	54	5270	17.28	17.61	20.46	≤ 23.98	Pass
11ax-HE40	MCS0	62	5310	16.84	17.21	20.04	≤ 23.98	Pass
11ax-HE40	MCS0	102	5510	14.20	14.49	17.36	≤ 23.98	Pass
11ax-HE40	MCS0	118	5590	17.78	18.05	20.93	≤ 23.98	Pass
11ax-HE40	MCS0	134	5670	15.86	16.29	19.09	≤ 23.98	Pass
11ax-HE40	MCS0	142	5710	17.54	17.58	20.57	≤ 23.98	Pass
11ax-HE40	MCS0	151	5755	17.94	18.43	21.20	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	17.85	18.39	21.14	≤ 30.00	Pass
11ax-HE80	MCS0	42	5210	16.52	16.93	19.74	≤ 30.00	Pass
11ax-HE80	MCS0	58	5290	15.16	15.65	18.42	≤ 23.98	Pass
11ax-HE80	MCS0	106	5530	14.91	15.12	18.03	≤ 23.98	Pass
11ax-HE80	MCS0	122	5610	16.62	17.01	19.83	≤ 23.98	Pass
11ax-HE80	MCS0	138	5690	17.32	17.85	20.60	≤ 23.98	Pass
11ax-HE80	MCS0	155	5775	16.12	16.23	19.19	≤ 30.00	Pass

Note 1: The Total Average Power (dBm) = $10*\log\{10^{(\text{Ant 0 Average Power }/10)} + 10^{(\text{Ant 1 Average Power }/10)}\}$.

Note 2: For 5250-5350MHz & 5470-5725MHz, the conducted power limit is as below.

802.11a: 11 + 10 log10 (18.56) = 23.69 < 23.98 dBm

802.11ac-VHT20: 11 + 10 log10 (20.03) = 24.02 > 23.98 dBm

802.11ax-HE20: 11 + 10 log10 (20.60) = 24.14 > 23.98 dBm

802.11ac-VHT40/ax-HE40/ac-VHT80/ax-HE80: 11 + 10 log10 B > 23.98dBm

Note 3: For straddle channel, the conducted power limit is as below.

802.11a CH144: 11 + 10 log10 (B) = 22.63dBm, B = 19.09/2 + 5 = 14.545MHz.

802.11ac-HT20 CH144: 11 + 10 log10 (B) = 22.82dBm, B = 20.42/2 + 5 = 15.21MHz.

802.11ax-HE20 CH144: 11 + 10 log10 (B) = 22.85dBm, B = 20.63/2 + 5 = 15.315MHz.

802.11ac-VHT40/ax-HE40/ac-VHT80/ax-HE80: 11 + 10 log10 B > 23.98dBm;

待測物名稱	ACCESS POINT	溫度	23 ~ 25°C
測試工程師	Kevin Ker	濕度	46 ~ 56%
測試場地	SR1	測試日期	2021/04/05
測試模式	Filter B		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11a	6Mbps	36	5180	17.22	17.70	20.48	≤ 30.00	Pass
11a	6Mbps	44	5220	18.65	18.19	21.44	≤ 30.00	Pass
11a	6Mbps	48	5240	18.60	19.10	21.87	≤ 30.00	Pass
11a	6Mbps	52	5260	16.42	16.80	19.62	≤ 23.69	Pass
11a	6Mbps	60	5300	16.14	16.51	19.34	≤ 23.69	Pass
11a	6Mbps	64	5320	15.92	16.66	19.32	≤ 23.69	Pass
11a	6Mbps	100	5500	16.19	16.54	19.38	≤ 23.69	Pass
11a	6Mbps	120	5600	16.02	16.69	19.38	≤ 23.69	Pass
11a	6Mbps	140	5700	16.16	16.69	19.44	≤ 23.69	Pass
11a	6Mbps	144	5720	16.05	16.63	19.36	≤ 22.63	Pass
11a	6Mbps	149	5745	18.18	18.64	21.43	≤ 30.00	Pass
11a	6Mbps	157	5785	18.12	18.49	21.32	≤ 30.00	Pass
11a	6Mbps	165	5825	17.94	18.18	21.07	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	17.87	18.35	21.13	≤ 30.00	Pass
11ac-VHT20	MSC0	40	5220	18.07	18.06	21.08	≤ 30.00	Pass
11ac-VHT20	MCS0	48	5240	18.06	18.13	21.11	≤ 30.00	Pass
11ac-VHT20	MSC0	52	5260	16.52	16.82	19.68	≤ 23.98	Pass
11ac-VHT20	MCS0	60	5300	16.33	16.78	19.57	≤ 23.98	Pass
11ac-VHT20	MSC0	64	5320	16.28	16.94	19.63	≤ 23.98	Pass
11ac-VHT20	MCS0	100	5500	15.78	16.25	19.03	≤ 23.98	Pass
11ac-VHT20	MSC0	120	5600	16.31	16.05	19.19	≤ 23.98	Pass
11ac-VHT20	MCS0	140	5700	16.22	16.26	19.25	≤ 23.98	Pass
11ac-VHT20	MSC0	144	5720	15.92	16.35	19.15	≤ 22.82	Pass
11ac-VHT20	MCS0	149	5745	18.12	18.41	21.28	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	17.94	17.97	20.97	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	17.89	18.05	20.98	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ac-VHT40	MCS0	38	5190	17.44	17.60	20.53	≤ 30.00	Pass
11ac-VHT40	MCS0	46	5230	16.35	17.83	20.16	≤ 30.00	Pass
11ac-VHT40	MCS0	54	5270	16.78	17.74	20.30	≤ 23.98	Pass
11ac-VHT40	MCS0	62	5310	16.84	17.54	20.21	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	16.40	16.68	19.55	≤ 23.98	Pass
11ac-VHT40	MCS0	118	5590	17.59	18.22	20.93	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	17.67	17.43	20.56	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	17.58	17.75	20.68	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	17.60	18.10	20.87	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	16.75	17.95	20.40	≤ 30.00	Pass
11ac-VHT80	MCS0	42	5210	16.02	16.66	19.36	≤ 30.00	Pass
11ac-VHT80	MCS0	58	5290	16.15	16.55	19.36	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	14.78	15.03	17.92	≤ 23.98	Pass
11ac-VHT80	MCS0	122	5610	17.05	16.99	20.03	≤ 23.98	Pass
11ac-VHT80	MCS0	138	5690	17.02	17.17	20.11	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	16.12	16.85	19.51	≤ 30.00	Pass
11ax-HE20	MCS0	36	5180	17.55	18.18	20.89	≤ 30.00	Pass
11ax-HE20	MCS0	44	5220	18.23	18.54	21.40	≤ 30.00	Pass
11ax-HE20	MCS0	48	5240	17.85	17.86	20.87	≤ 30.00	Pass
11ax-HE20	MCS0	52	5260	16.67	17.33	20.02	≤ 23.98	Pass
11ax-HE20	MCS0	60	5300	16.37	17.16	19.79	≤ 23.98	Pass
11ax-HE20	MCS0	64	5320	16.48	17.15	19.84	≤ 23.98	Pass
11ax-HE20	MCS0	100	5500	16.50	17.08	19.81	≤ 23.98	Pass
11ax-HE20	MCS0	120	5600	16.50	16.87	19.70	≤ 23.98	Pass
11ax-HE20	MCS0	140	5700	16.55	16.94	19.76	≤ 23.98	Pass
11ax-HE20	MCS0	144	5720	16.49	16.74	19.63	≤ 22.85	Pass
11ax-HE20	MCS0	149	5745	18.02	18.48	21.27	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	17.77	18.47	21.14	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	17.96	18.19	21.09	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
11ax-HE40	MCS0	38	5190	16.63	17.47	20.08	≤ 30.00	Pass
11ax-HE40	MCS0	46	5230	16.78	17.94	20.41	≤ 30.00	Pass
11ax-HE40	MCS0	54	5270	17.04	17.90	20.50	≤ 23.98	Pass
11ax-HE40	MCS0	62	5310	16.60	17.38	20.02	≤ 23.98	Pass
11ax-HE40	MCS0	102	5510	13.77	14.45	17.13	≤ 23.98	Pass
11ax-HE40	MCS0	118	5590	17.55	18.08	20.83	≤ 23.98	Pass
11ax-HE40	MCS0	134	5670	15.68	16.02	18.86	≤ 23.98	Pass
11ax-HE40	MCS0	142	5710	16.86	17.76	20.34	≤ 23.98	Pass
11ax-HE40	MCS0	151	5755	17.26	18.03	20.67	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	17.19	17.88	20.56	≤ 30.00	Pass
11ax-HE80	MCS0	42	5210	16.46	16.95	19.72	≤ 30.00	Pass
11ax-HE80	MCS0	58	5290	15.13	15.67	18.42	≤ 23.98	Pass
11ax-HE80	MCS0	106	5530	14.89	15.01	17.96	≤ 23.98	Pass
11ax-HE80	MCS0	122	5610	16.44	17.08	19.78	≤ 23.98	Pass
11ax-HE80	MCS0	138	5690	16.83	17.88	20.40	≤ 23.98	Pass
11ax-HE80	MCS0	155	5775	16.01	16.22	19.13	≤ 30.00	Pass

Note 1: The Total Average Power (dBm) = $10*\log\{10^{(\text{Ant 0 Average Power }/10)} + 10^{(\text{Ant 1 Average Power }/10)}\}$.

Note 2: For 5250-5350MHz & 5470-5725MHz, the conducted power limit is as below.

802.11a: 11 + 10 log10 (18.56) = 23.69 < 23.98 dBm

802.11ac-VHT20: 11 + 10 log10 (20.03) = 24.02 > 23.98 dBm

802.11ax-HE20: 11 + 10 log10 (20.60) = 24.14 > 23.98 dBm

802.11ac-VHT40/ax-HE40/ac-VHT80/ax-HE80: 11 + 10 log10 B > 23.98dBm

Note 3: For straddle channel, the conducted power limit is as below.

802.11a CH144: 11 + 10 log10 (B) = 22.63dBm, B = 19.09/2 + 5 = 14.545MHz.

802.11ac-HT20 CH144: 11 + 10 log10 (B) = 22.82dBm, B = 20.42/2 + 5 = 15.21MHz.

802.11ax-HE20 CH144: 11 + 10 log10 (B) = 22.85dBm, B = 20.63/2 + 5 = 15.315MHz.

802.11ac-VHT40/ax-HE40/ac-VHT80/ax-HE80: 11 + 10 log10 B > 23.98dBm;

5.3 天線之要求

5.3.1 限制要求

依據國家通訊傳播委員會低功率射頻器材技術規範之第5.7.3.1及5.7.3.3節規定，天線之規格可不受下述規定之限制。

低功率射頻器材之發射機或收發信機所使用之天線，應為全固定、半固定式或以獨特之耦合(unique coupling)方式連接機體。製造者可設計供使用者因損壞而替換之天線，但不得設計或使用原認證以外之天線或可供引接各類電纜之標準天線插座或電氣連接頭，如：BNC、F type、N type、M type、UG type、RCA、SMA、SMB…等及其他各類工業或通訊標準接頭。

5.3.2 天線樣式

Antenna Type (Brand: Aruba)	Frequency Band (GHz)	Ant 0 Max Peak Gain (dBi)	Ant 1 Max Peak Gain (dBi)	CDD Directional Gain (dBi)	
				For Power (Uncorrelated)	For PSD (Correlated)
Wi-Fi Internal Antenna (2*2 MIMO) (M/N : ANT-635-Dual1 for Ant 0 ; ANT-635-Dual2 For Ant 1)					
PIFA (Loop pattern)	2.4 ~ 2.5	3.10	4.60	2.90	5.91
	5.15 ~ 5.85	5.90	7.00	4.90	7.91
Bluetooth / ZigBee Internal Antenna (ANT-635-BLE for Bluetooth / ZigBee)					
PIFA (Loop pattern)	2.4 ~ 2.5	3.0			

Note 1: If transmit signals are correlated, then Directional gain = 10 log*[$(10^{G1/20} + 10^{G2/20} + \cdots + 10^{GN/20})^2 / N_{ANT}$] dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

If all transmit signals are completely uncorrelated, then Directional gain = 10 log*[$(10^{G1/10} + 10^{G2/10} + \cdots + 10^{GN/10})/N_{ANT}$] dBi

Note 2: The manufacturer use the antenna gain of each angle to calculate the directional gain and show the highest directional gain in test report.

5.4 輻射電場強度

5.4.1 量測方法

待測物置於非導體桌面（落地型產品置於地上），受測物使用交流電源時，將其與任何配件設備之電源線連接至位於旋轉桌的交流電源。受測物使用電池時，測試時應裝置新電池或充電完全的電池。受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度，接收天線並應於水平及垂直極化方向各量測一次。(待測物擺設方式根據 ANSI C63.10-2013 版本，待測物放置桌中心，1G 以下擺設高度為 80cm/1G 以上擺設高度為 150cm)

(1) 任一頻率小於或等於 1000 MHz 之訊號,使用 CISPR 準峰值檢波器
(2) 任一頻率大於 1000 MHz 之訊號，使用平均值檢波器測量，當規定之發射限制值為平均值時(含 1000 MHz 以下)，受測訊號藉由峰值檢波器(RBW:1MHz,VBW:3MHz)所測量之峰值，亦須符合峰值發射限制值，其峰值發射限制值為最大容許平均值加 20 dB。

備註: 若為手持式或穿戴式之裝置，需對其三個正交軸的方位評估測試，並記錄最差的數值。

5.4.2 限制要求


其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。各頻段重疊處，以較嚴格之限制值為準。

頻率(f) (MHz)	電場強度 (微伏特/公尺，μV/m)	測距 (公尺)
0.009 ≤ f ≤ 0.490	2400/f(kHz)	300
0.490 < f ≤ 1.705	24000/f(kHz)	30
1.705 < f < 30	30	30
30 ≤ f ≤ 88	100	3
88 < f ≤ 216	150	3
216 < f ≤ 960	200	3
960 < f	500	3


上表規定之電場強度，發射頻率在 9 kHz～90 kHz、110 kHz～490 kHz 及 1000MHz 以上者，其量測應以平均值檢波器為基準，且須符合低功率射頻器材技術規範第 6.14.節之規定；其他發射頻率，應以 CISPR 準峰值(quasi-peak) 檢波器測量；非以上表所指定之距離測量時，應符合第 6.5 節之規定，而輻射發射之量測頻率範圍須符合低功率射頻器材技術規範第 6.12 節之規定。

5.4.3 測試架構圖


Under 30MHz Test

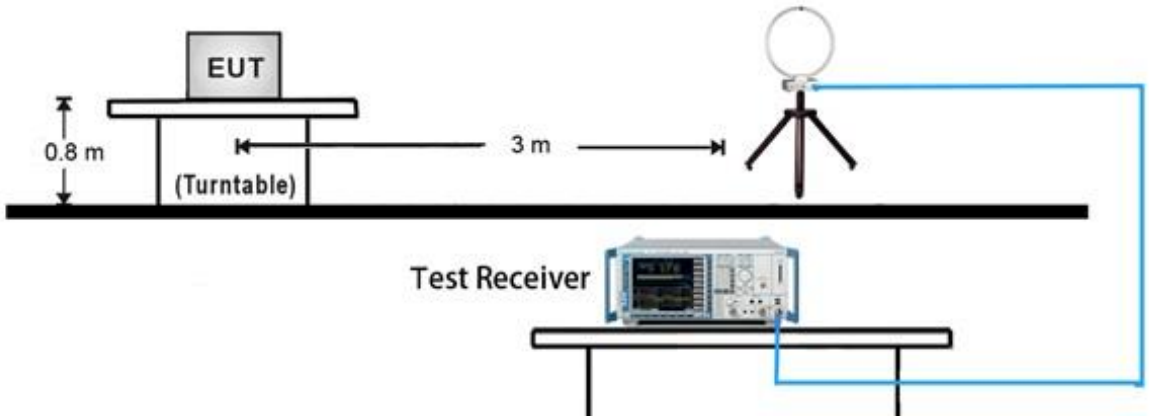


Under 1GHz Test Setup

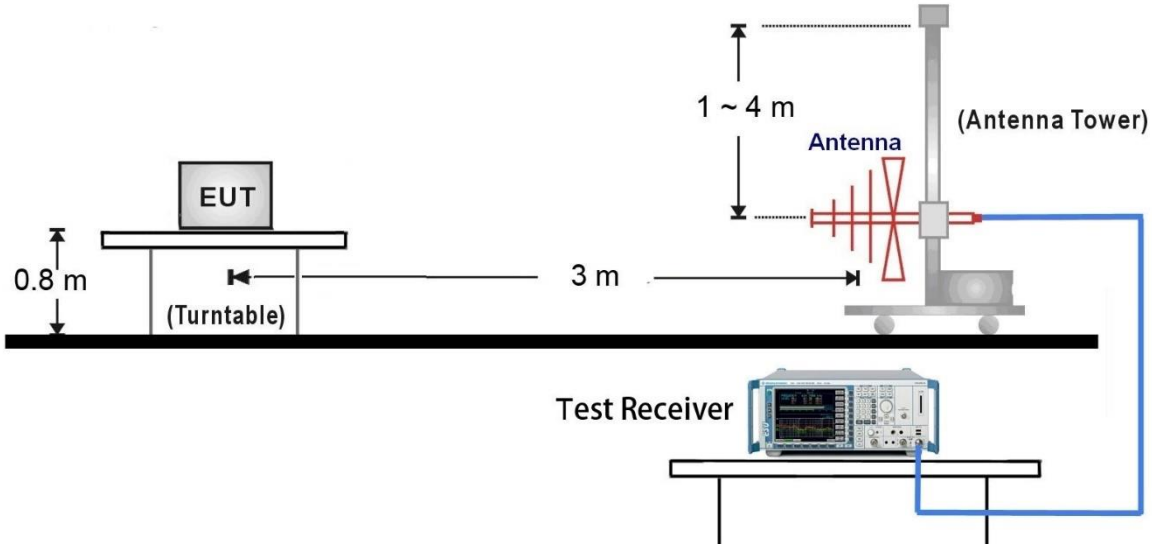

1GHz ~ 18GHz Test Setup:

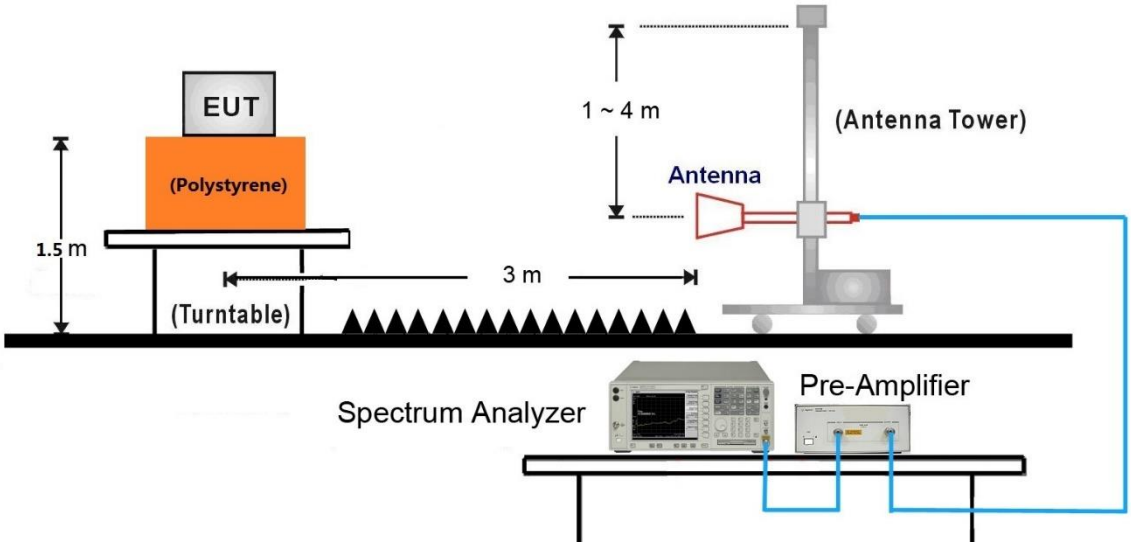


18GHz ~25GHz Test Setup:

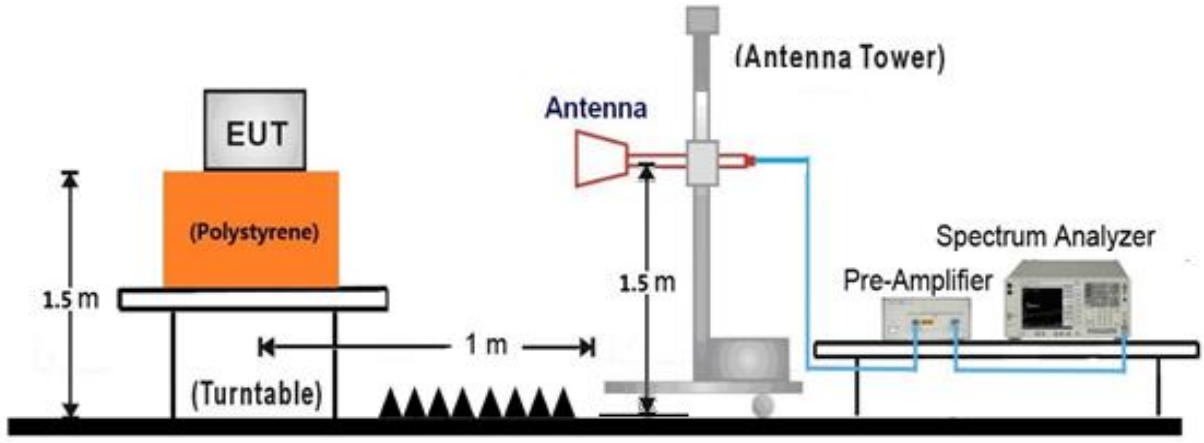

5.4.4 輻射電場強度測試結果

Type A Filter Configuration

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	110V/60Hz

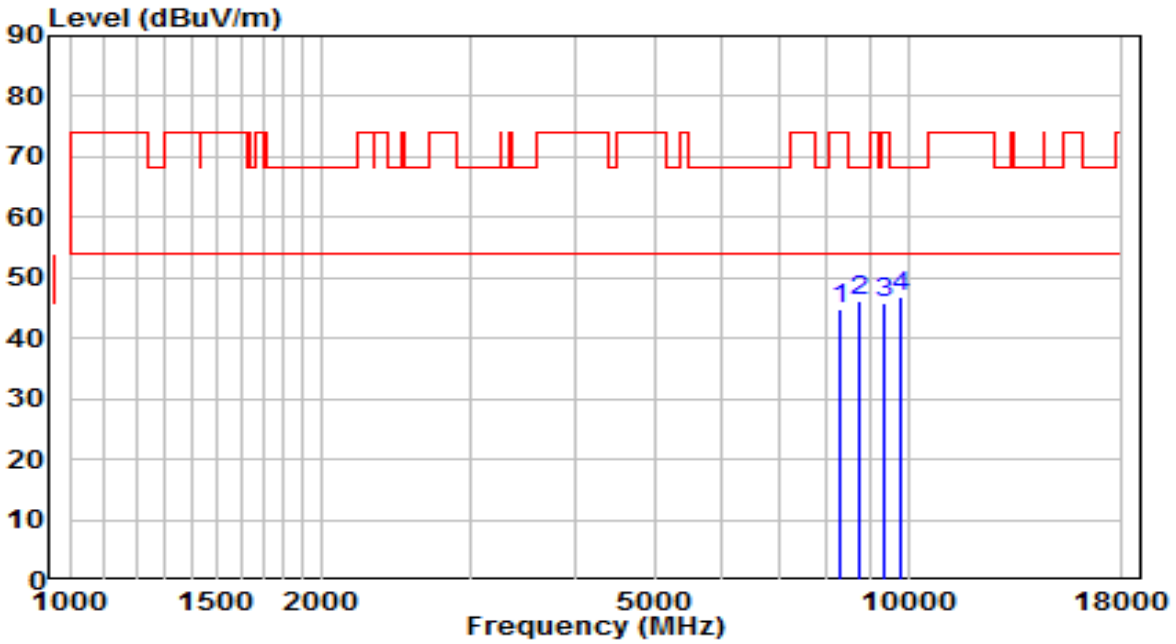


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8293.000	32.30	12.49	44.79	-29.21	74.00	Peak
2		8769.000	33.02	13.11	46.14	-22.06	68.20	Peak
3		9364.000	31.52	14.22	45.74	-28.26	74.00	Peak
4	*	9814.500	31.99	15.01	47.00	-21.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	110V/60Hz

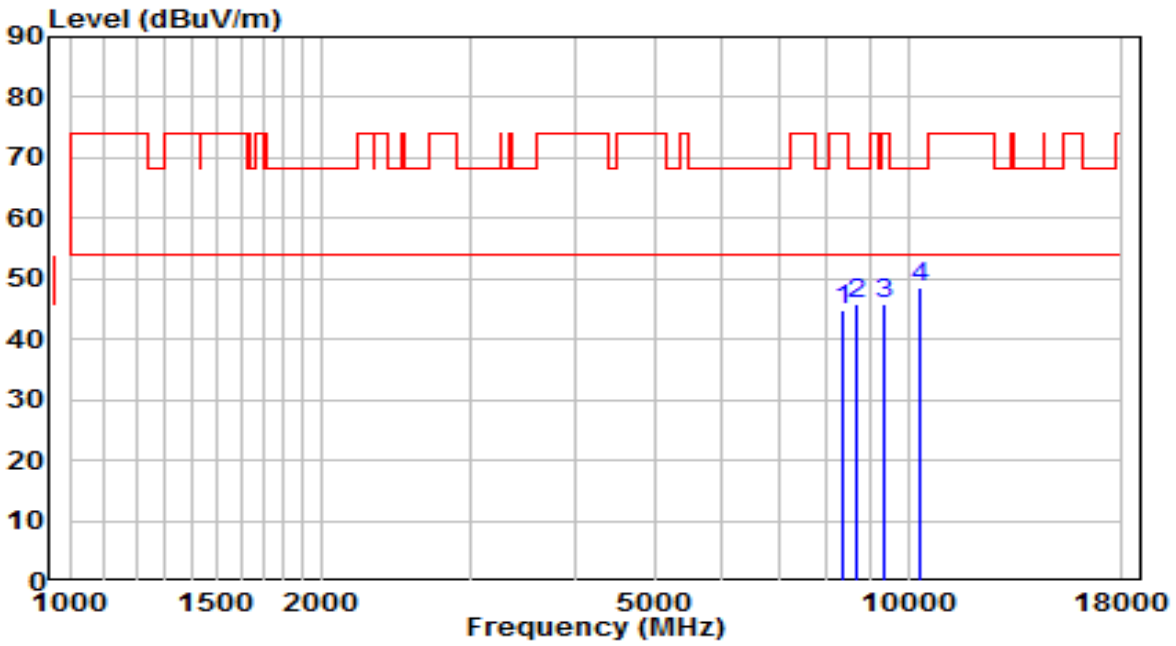


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8352.500	32.49	12.48	44.97	-29.03	74.00	Peak
2		8701.000	32.76	12.95	45.71	-22.49	68.20	Peak
3		9372.500	31.69	14.23	45.93	-28.07	74.00	Peak
4	*	10299.000	32.04	16.38	48.43	-19.77	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5220MHz	Test Voltage	110V/60Hz

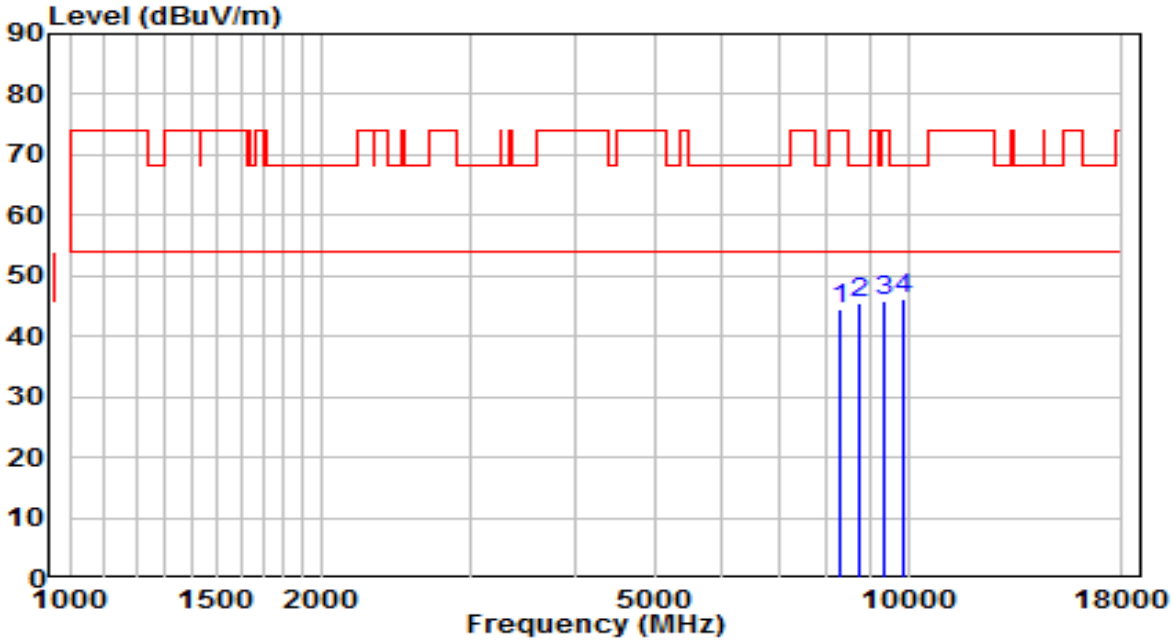


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8276.000	32.05	12.49	44.54	-29.46	74.00	Peak
2		8752.000	32.37	13.07	45.44	-22.76	68.20	Peak
3		9347.000	31.62	14.19	45.82	-28.18	74.00	Peak
4	*	9874.000	31.21	15.12	46.33	-21.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5220MHz	Test Voltage	110V/60Hz

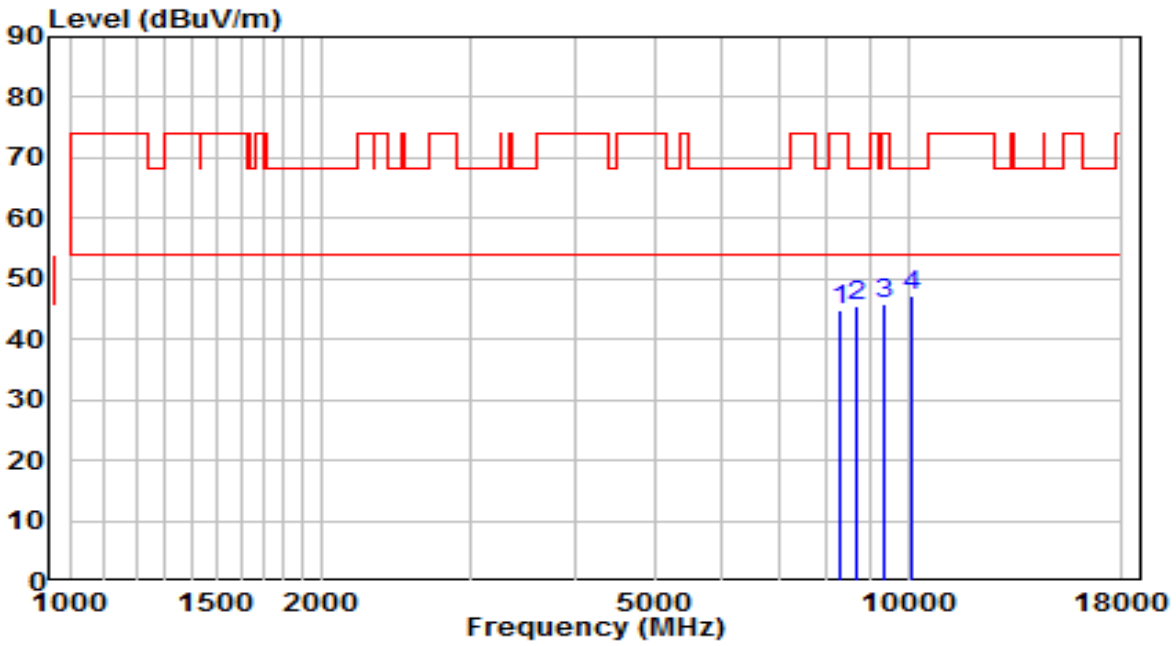


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8284.500	32.41	12.49	44.89	-29.11	74.00	Peak
2		8650.000	32.72	12.82	45.55	-22.65	68.20	Peak
3		9381.000	31.70	14.24	45.94	-28.06	74.00	Peak
4	*	10129.000	31.47	15.80	47.27	-20.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5240MHz	Test Voltage	110V/60Hz

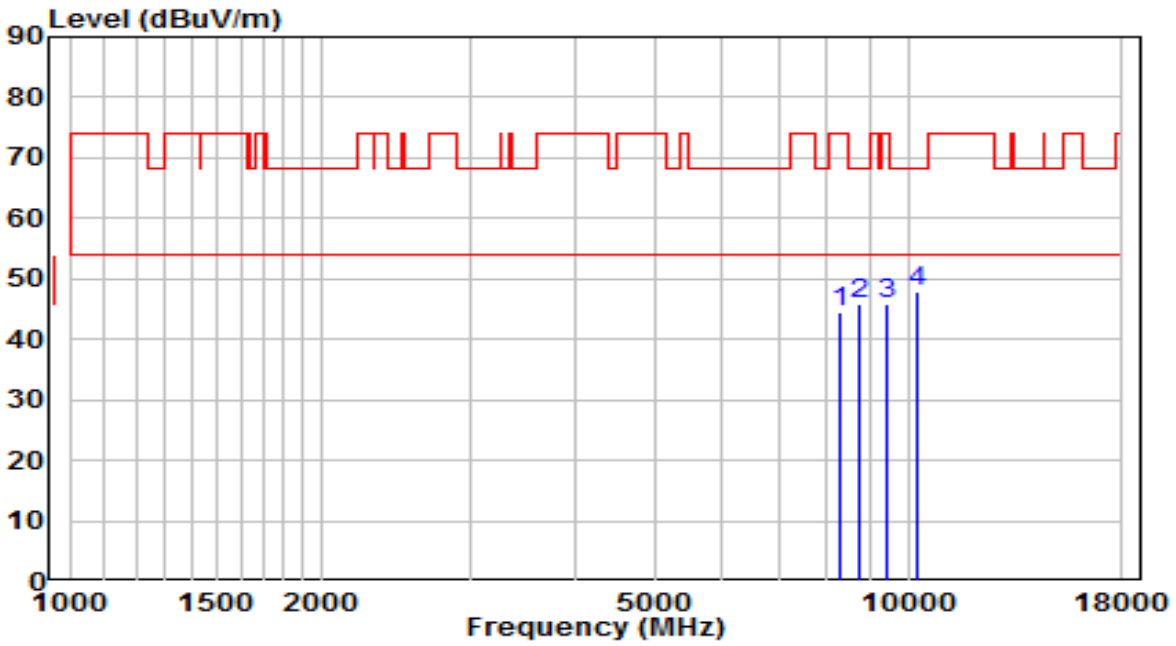


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8293.000	32.11	12.49	44.59	-29.41	74.00	Peak
2		8760.500	32.76	13.09	45.86	-22.34	68.20	Peak
3		9457.500	31.59	14.36	45.95	-28.05	74.00	Peak
4	*	10222.500	31.87	16.12	47.99	-20.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5240MHz	Test Voltage	110V/60Hz

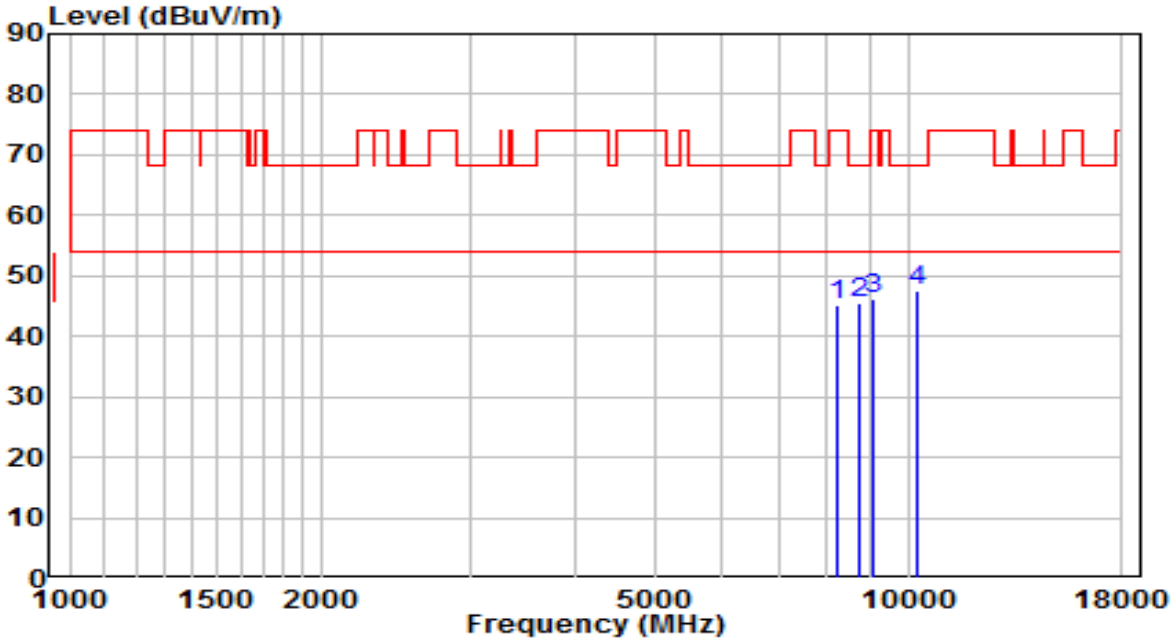


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8259.000	32.72	12.49	45.21	-28.79	74.00	Peak
2		8752.000	32.44	13.07	45.52	-22.68	68.20	Peak
3		9058.000	32.38	13.77	46.14	-27.86	74.00	Peak
4	*	10265.000	31.45	16.27	47.72	-20.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5260MHz	Test Voltage	120V/50Hz

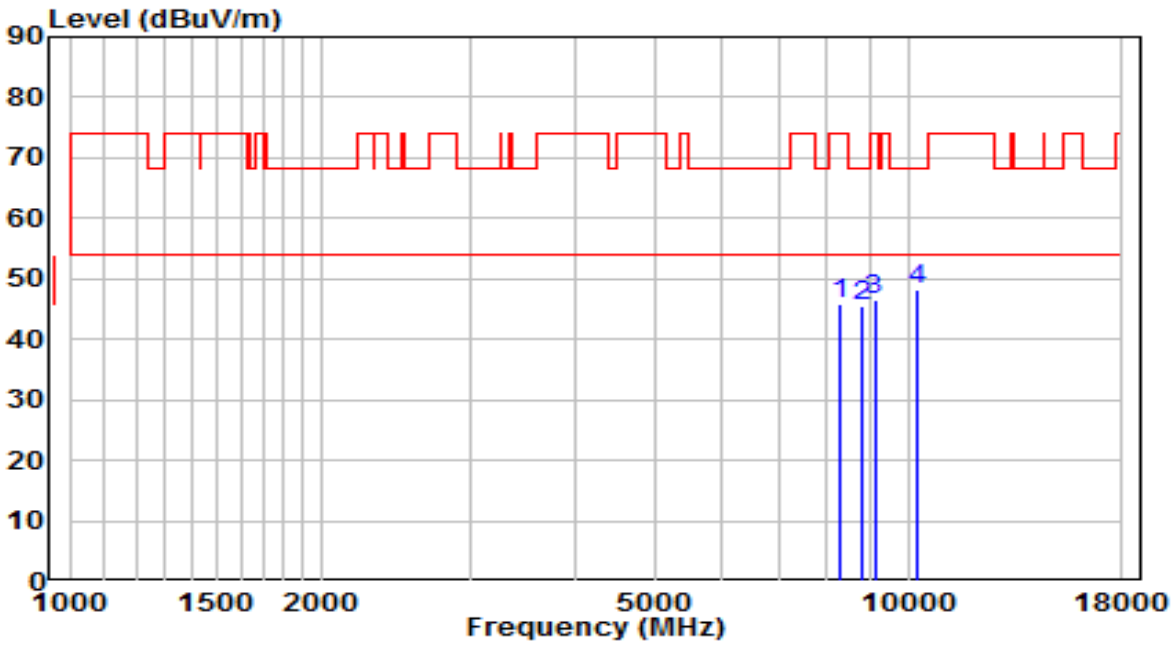


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8293.000	33.30	12.49	45.78	-28.22	74.00	Peak
2		8828.500	32.25	13.26	45.51	-22.69	68.20	Peak
3		9117.500	32.81	13.85	46.67	-27.33	74.00	Peak
4	*	10248.000	32.17	16.21	48.37	-19.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5260MHz	Test Voltage	120V/50Hz

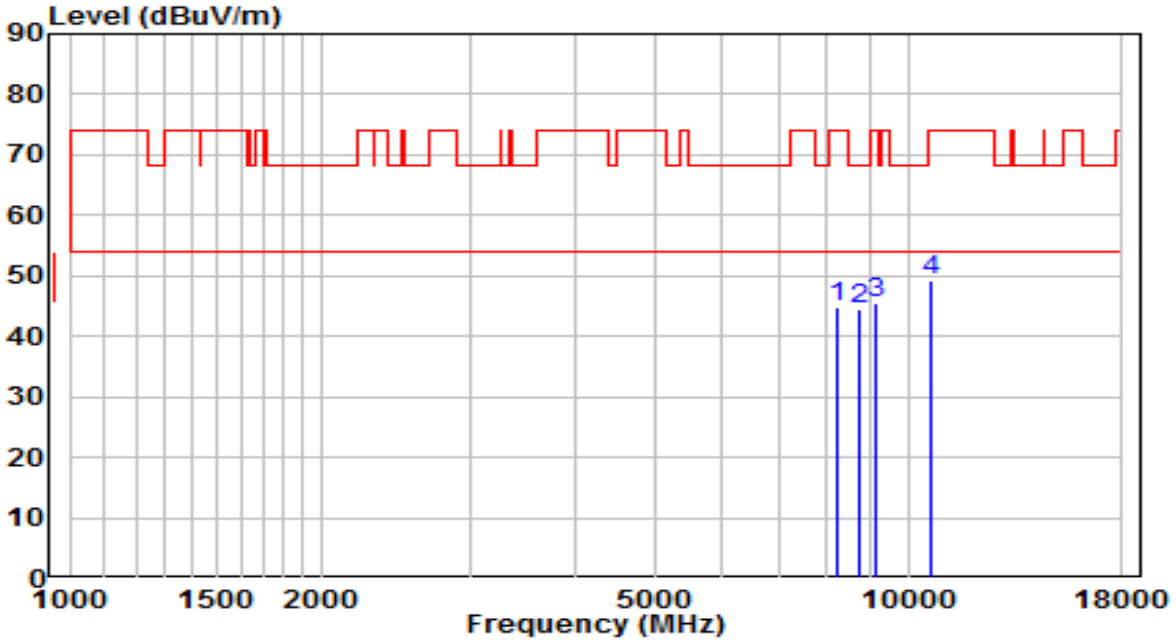


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8242.000	32.48	12.49	44.97	-29.03	74.00	Peak
2	*	8760.500	31.53	13.09	44.62	-23.58	68.20	Peak
3		9126.000	31.72	13.87	45.59	-28.41	74.00	Peak
4		10656.000	32.05	17.29	49.34	-24.66	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5300MHz	Test Voltage	120V/50Hz

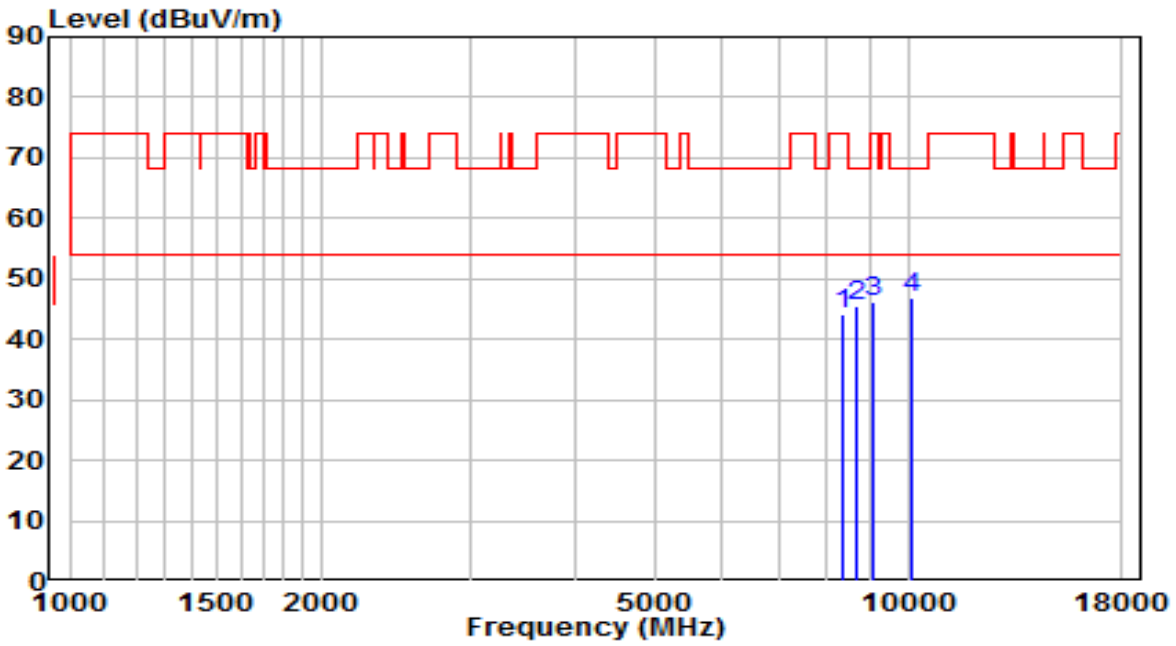


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8335.500	31.83	12.48	44.31	-29.69	74.00	Peak
2		8675.500	32.68	12.88	45.57	-22.63	68.20	Peak
3		9092.000	32.41	13.82	46.23	-27.77	74.00	Peak
4	*	10069.500	31.18	15.60	46.78	-21.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5300MHz	Test Voltage	120V/50Hz

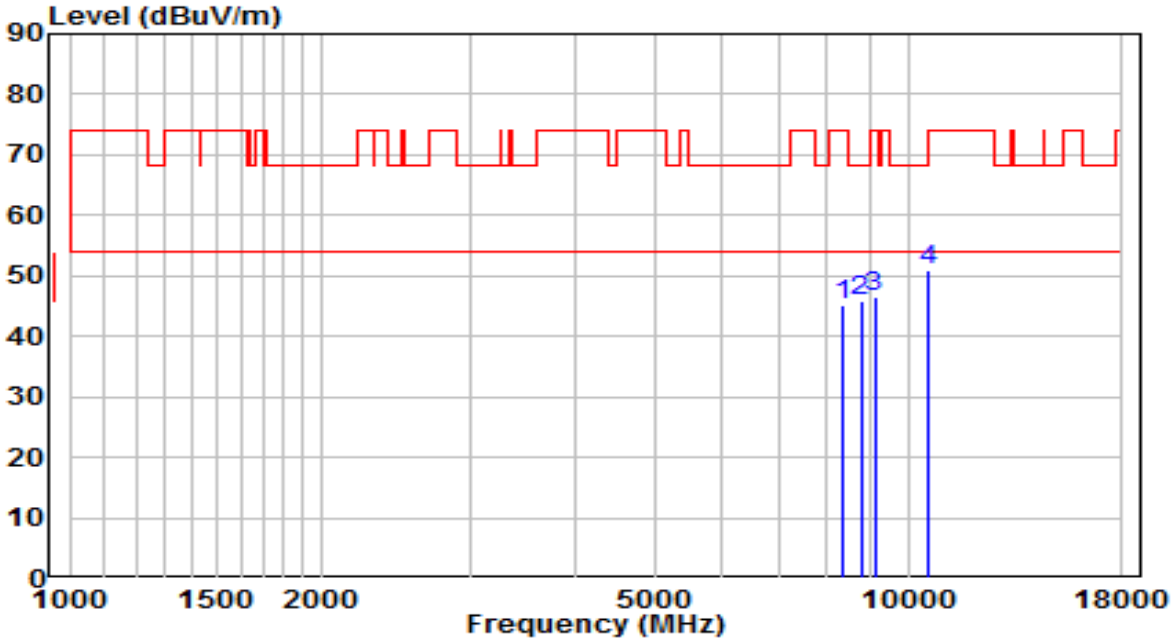


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8327.000	32.75	12.48	45.23	-28.77	74.00	Peak
2		8777.500	32.74	13.13	45.87	-22.33	68.20	Peak
3		9117.500	32.52	13.85	46.37	-27.63	74.00	Peak
4	*	10596.500	33.75	17.21	50.95	-17.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5320MHz	Test Voltage	120V/50Hz

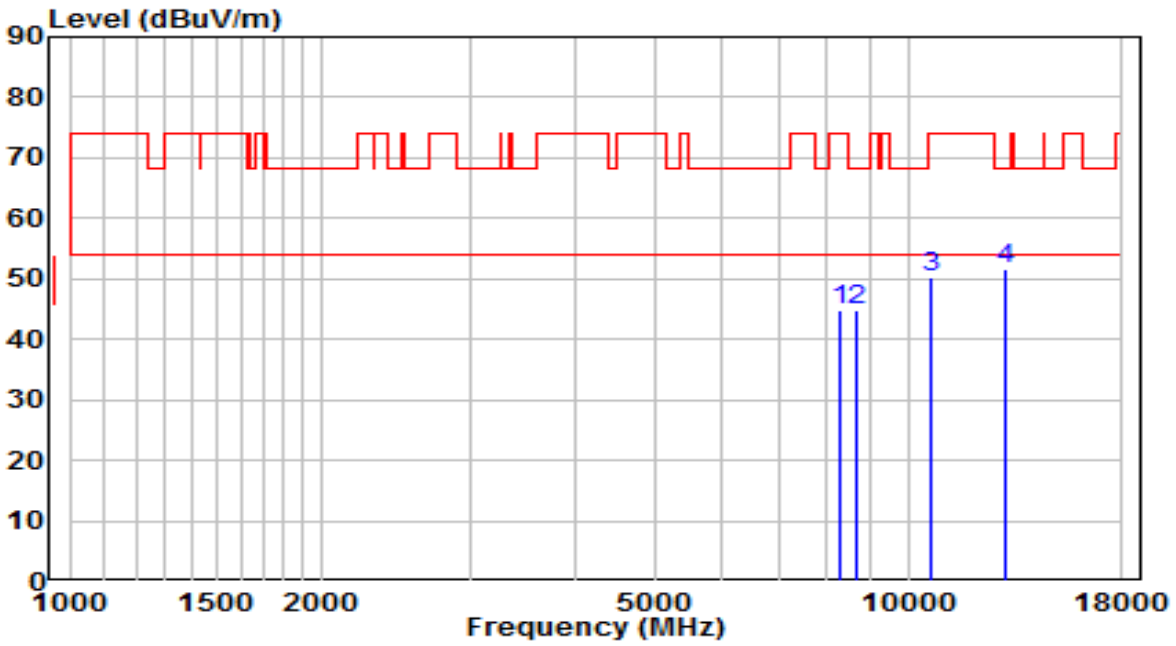


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8318.500	32.48	12.48	44.96	-29.04	74.00	Peak
2		8650.000	32.04	12.82	44.86	-23.34	68.20	Peak
3		10639.000	32.84	17.27	50.11	-23.89	74.00	Peak
4	*	13019.000	32.36	19.34	51.70	-16.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5320MHz	Test Voltage	120V/50Hz

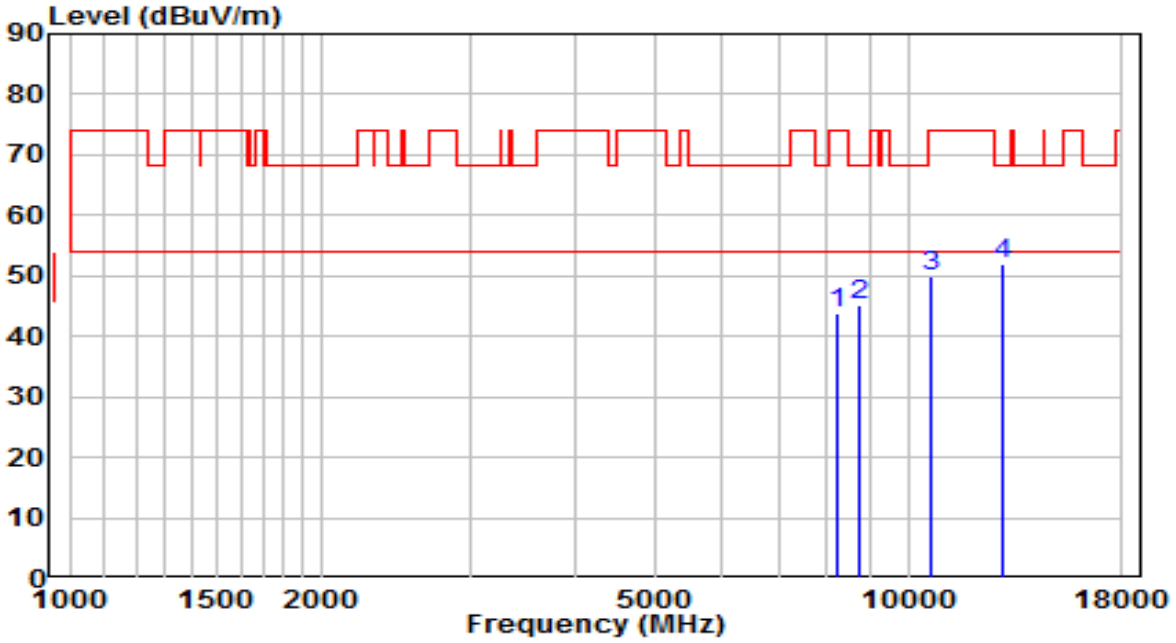


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8242.000	31.35	12.49	43.84	-30.16	74.00	Peak
2		8726.500	32.03	13.01	45.04	-23.16	68.20	Peak
3		10639.000	32.50	17.27	49.77	-24.23	74.00	Peak
4	*	12968.000	32.85	19.20	52.05	-16.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5500MHz	Test Voltage	120V/50Hz

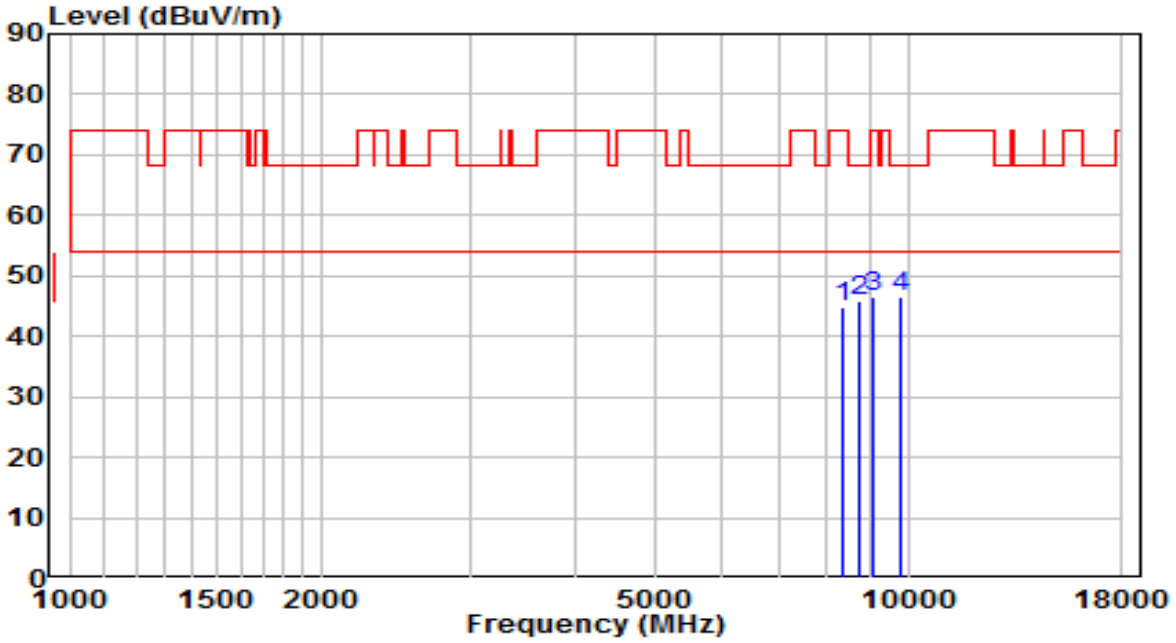


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8327.000	32.19	12.48	44.67	-29.33	74.00	Peak
2		8769.000	32.79	13.11	45.91	-22.29	68.20	Peak
3		9092.000	32.68	13.82	46.50	-27.50	74.00	Peak
4	*	9823.000	31.56	15.03	46.59	-21.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5500MHz	Test Voltage	120V/50Hz

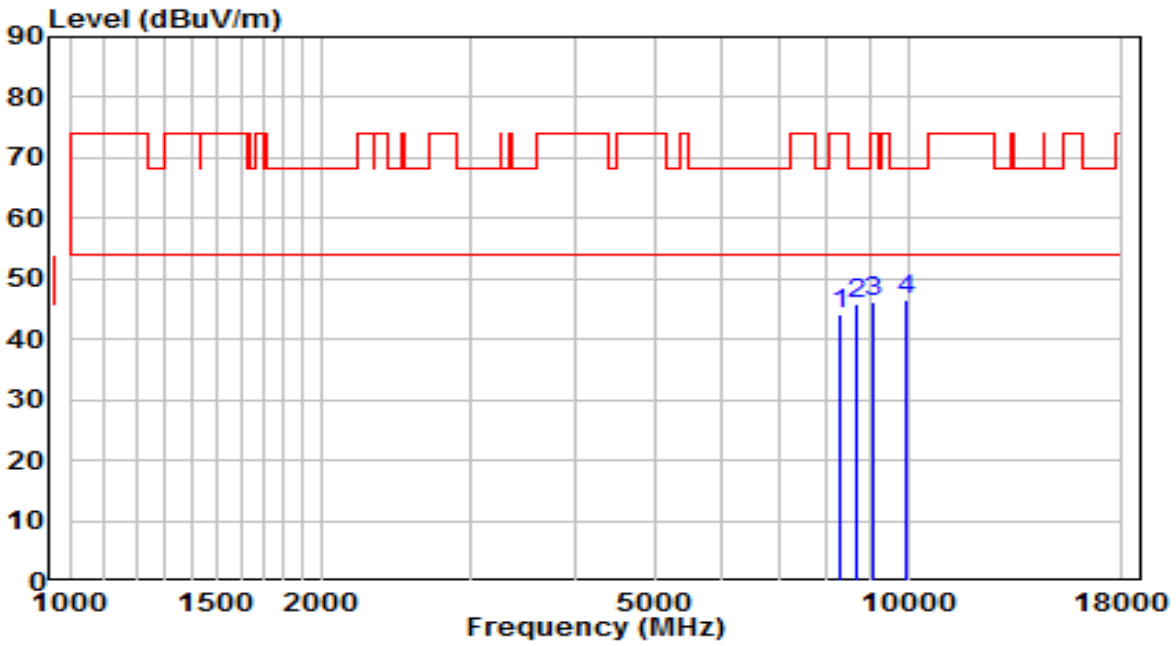


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8284.500	31.53	12.49	44.02	-29.98	74.00	Peak
2		8709.500	32.97	12.97	45.94	-22.26	68.20	Peak
3		9109.000	32.46	13.84	46.30	-27.70	74.00	Peak
4	*	9950.500	31.20	15.27	46.47	-21.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5580MHz	Test Voltage	120V/50Hz

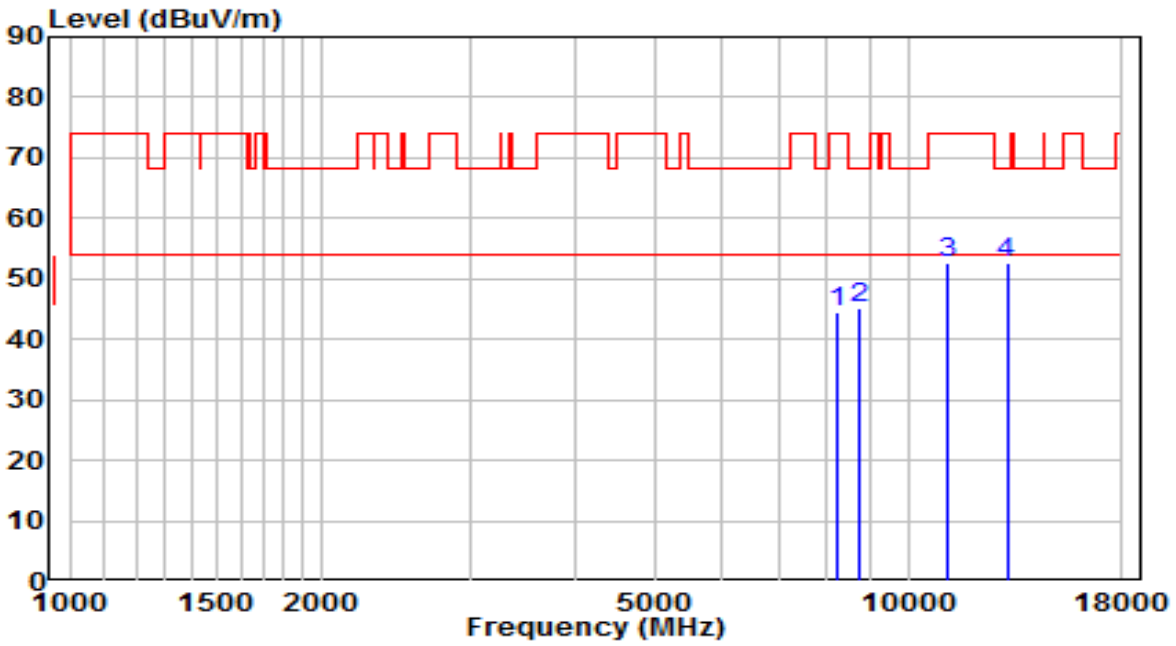


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8259.000	32.17	12.49	44.66	-29.34	74.00	Peak
2		8726.500	32.17	13.01	45.18	-23.02	68.20	Peak
3	*	11166.000	28.66	18.00	46.66	-7.34	54.00	Average
4		11166.000	34.59	18.00	52.59	-21.41	74.00	Peak
5		12959.500	31.52	19.18	50.70	-17.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5580MHz	Test Voltage	120V/50Hz

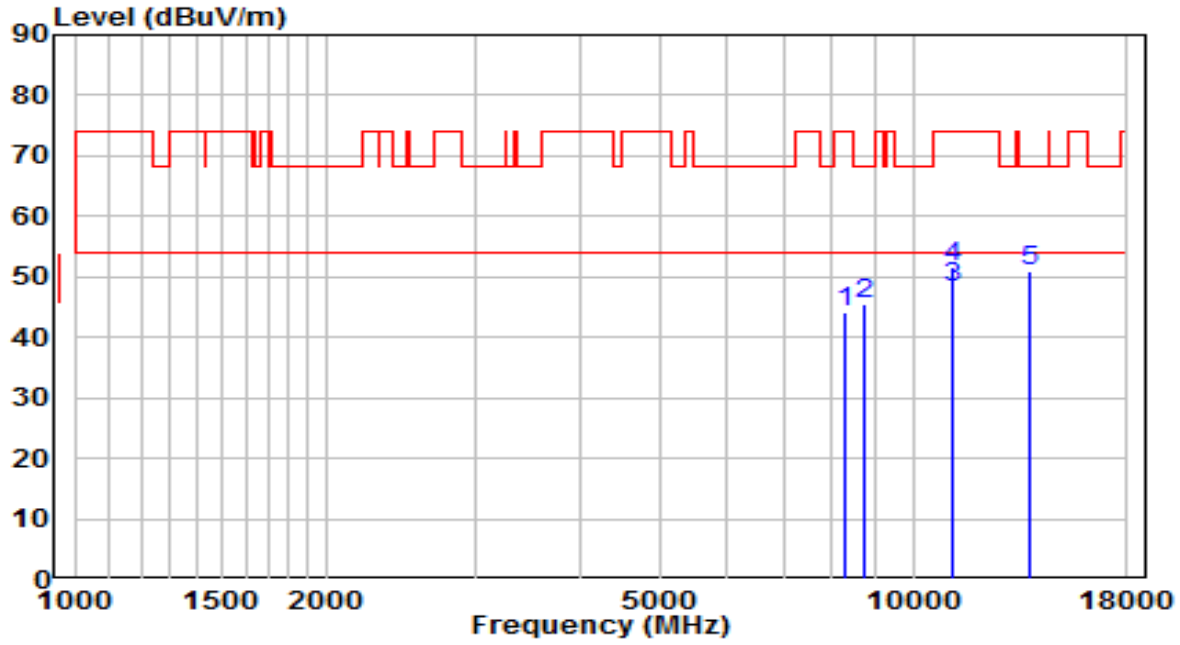


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8293.000	31.83	12.49	44.32	-29.68	74.00	Peak
2		8760.500	32.50	13.09	45.59	-22.61	68.20	Peak
3	*	11157.500	30.16	17.99	48.15	-5.85	54.00	Average
4		11157.500	33.69	17.99	51.68	-22.32	74.00	Peak
5		13758.500	29.97	21.05	51.02	-17.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5700MHz	Test Voltage	120V/50Hz

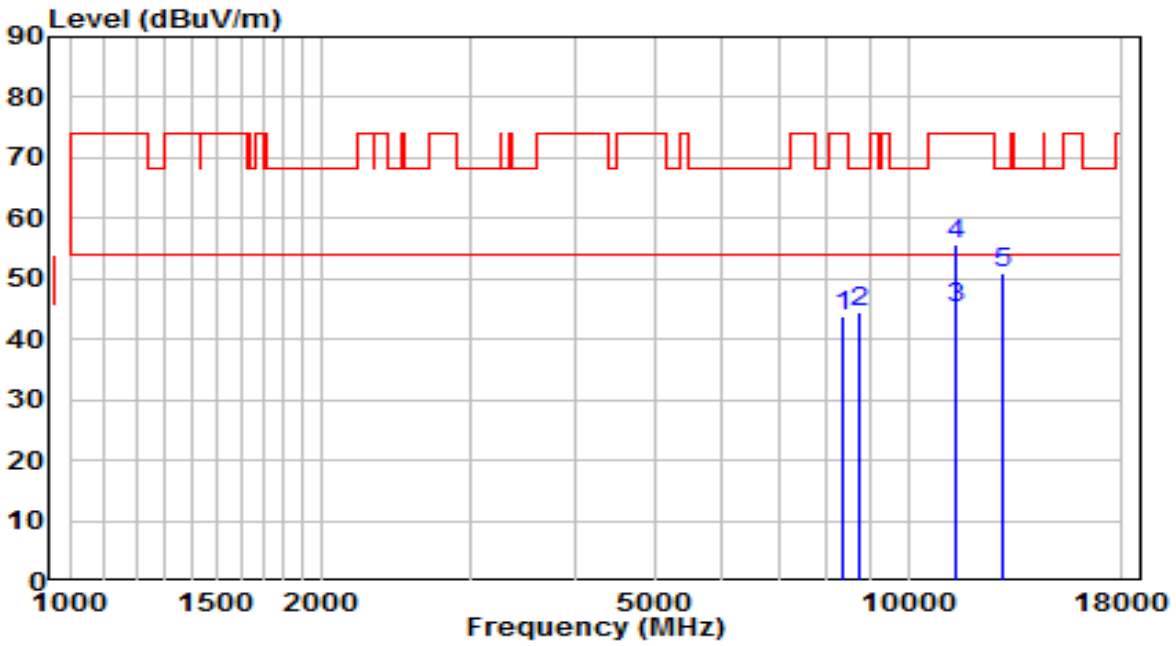


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8378.000	31.44	12.47	43.91	-30.09	74.00	Peak
2		8735.000	31.48	13.03	44.51	-23.69	68.20	Peak
3	*	11404.000	26.69	18.32	45.01	-8.99	54.00	Average
4		11404.000	37.43	18.32	55.75	-18.25	74.00	Peak
5		12976.500	31.64	19.22	50.87	-17.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5700MHz	Test Voltage	120V/50Hz

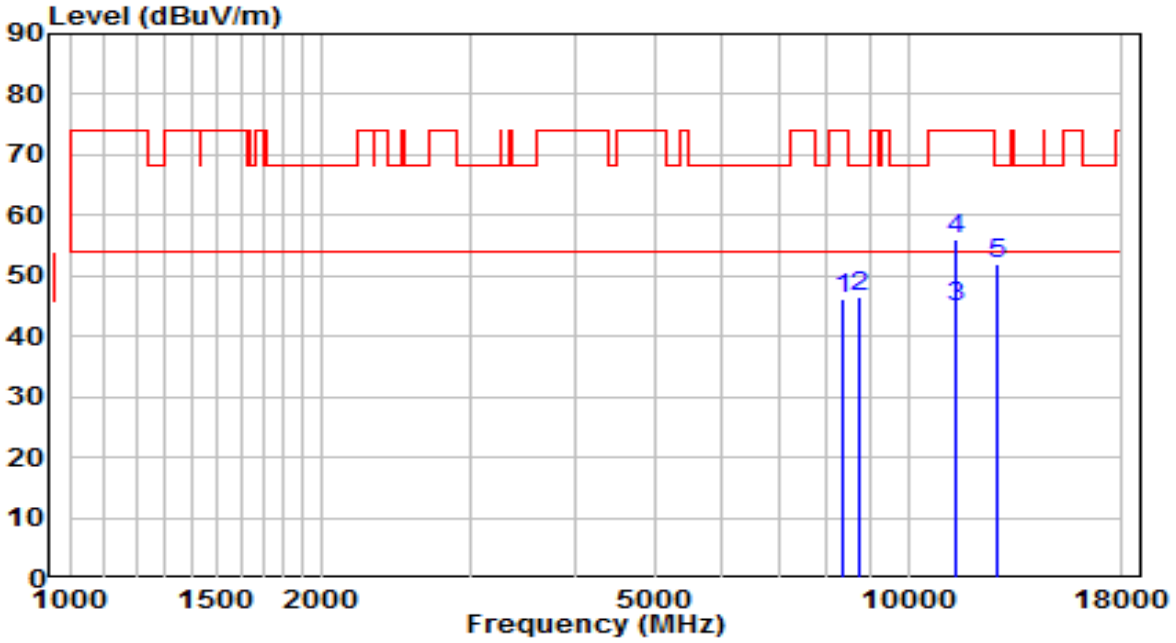


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8335.500	33.74	12.48	46.22	-27.78	74.00	Peak
2		8769.000	33.34	13.11	46.46	-21.74	68.20	Peak
3	*	11395.500	26.59	18.31	44.90	-9.10	54.00	Average
4		11395.500	37.61	18.31	55.92	-18.08	74.00	Peak
5		12781.000	33.20	18.68	51.88	-16.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5720MHz	Test Voltage	120V/50Hz

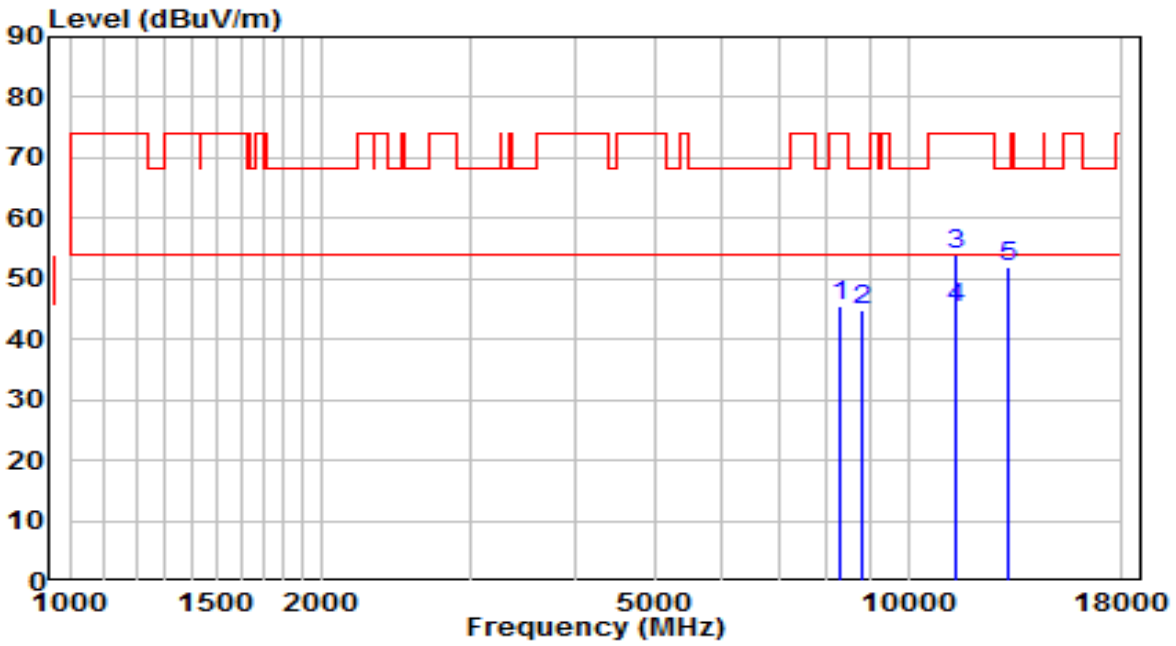


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8318.500	33.07	12.48	45.56	-28.44	74.00	Peak
2		8837.000	31.53	13.28	44.81	-23.39	68.20	Peak
3		11438.000	35.59	18.37	53.96	-20.04	74.00	Peak
4	*	11438.000	26.96	18.37	45.33	-8.67	54.00	Average
5		13146.500	32.38	19.66	52.04	-16.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5720MHz	Test Voltage	120V/50Hz

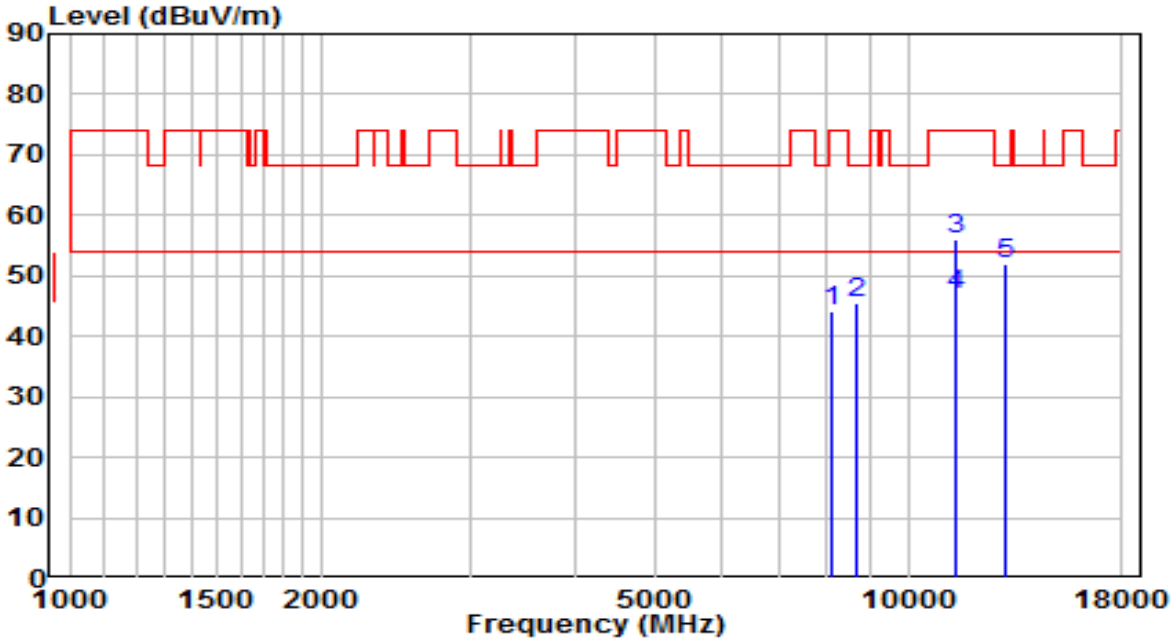

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8123.000	31.71	12.51	44.22	-29.78	74.00	Peak
2		8692.500	32.45	12.93	45.38	-22.82	68.20	Peak
3		11438.000	37.75	18.37	56.12	-17.88	74.00	Peak
4	*	11438.000	28.40	18.37	46.77	-7.23	54.00	Average
5		13061.500	32.61	19.45	52.06	-16.14	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5745MHz	Test Voltage	110V/60Hz

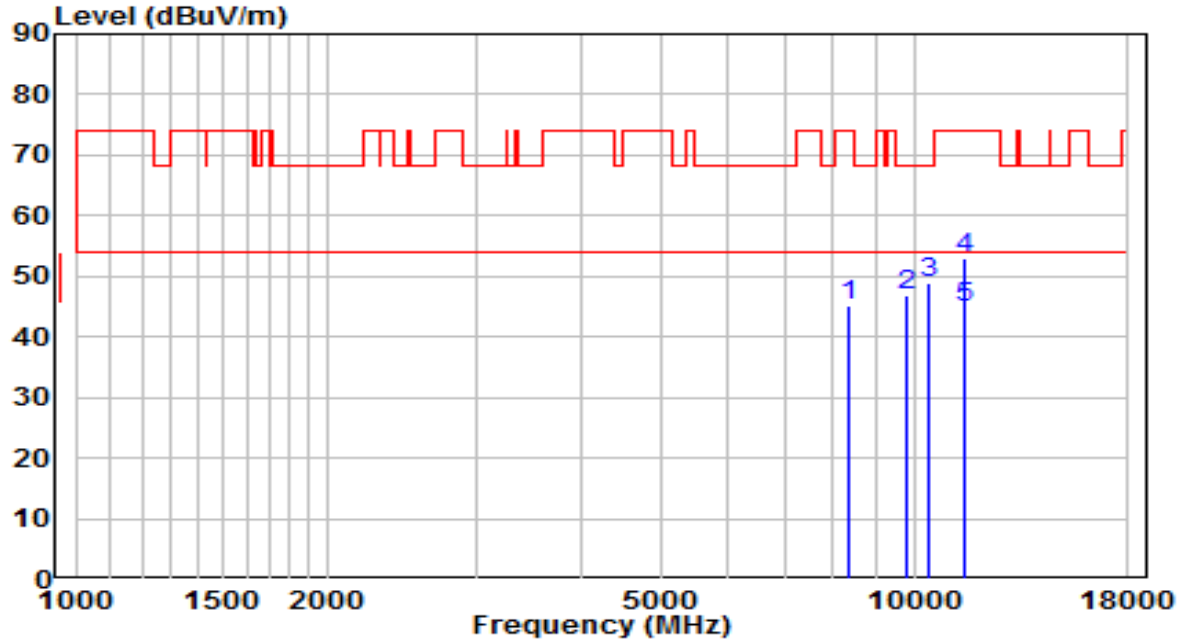

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8352.500	32.67	12.48	45.15	-28.85	74.00	Peak
2		9789.000	31.90	14.96	46.86	-21.34	68.20	Peak
3		10384.000	32.22	16.67	48.89	-19.31	68.20	Peak
4		11489.000	34.43	18.44	52.86	-21.14	74.00	Peak
5	*	11489.000	26.51	18.44	44.95	-9.05	54.00	Average

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5745MHz	Test Voltage	110V/60Hz

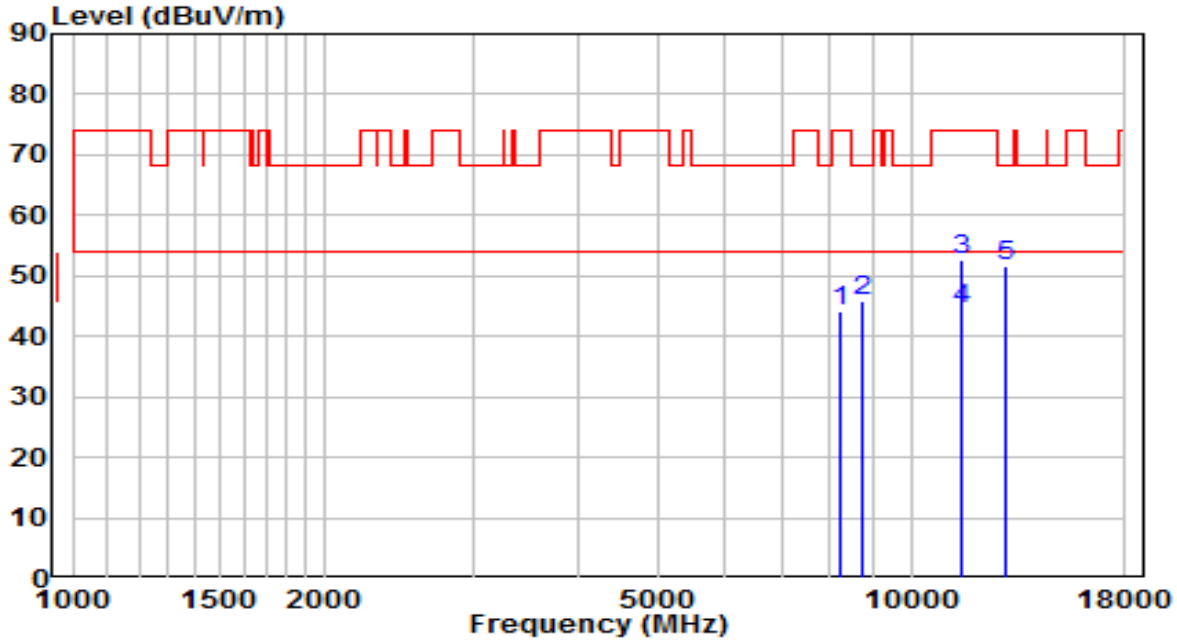


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8225.000	31.81	12.50	44.31	-29.69	74.00	Peak
2		8752.000	32.78	13.07	45.85	-22.35	68.20	Peak
3		11489.000	34.14	18.44	52.57	-21.43	74.00	Peak
4	*	11489.000	25.91	18.44	44.35	-9.65	54.00	Average
5		12942.500	32.44	19.13	51.57	-16.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5785MHz	Test Voltage	110V/60Hz

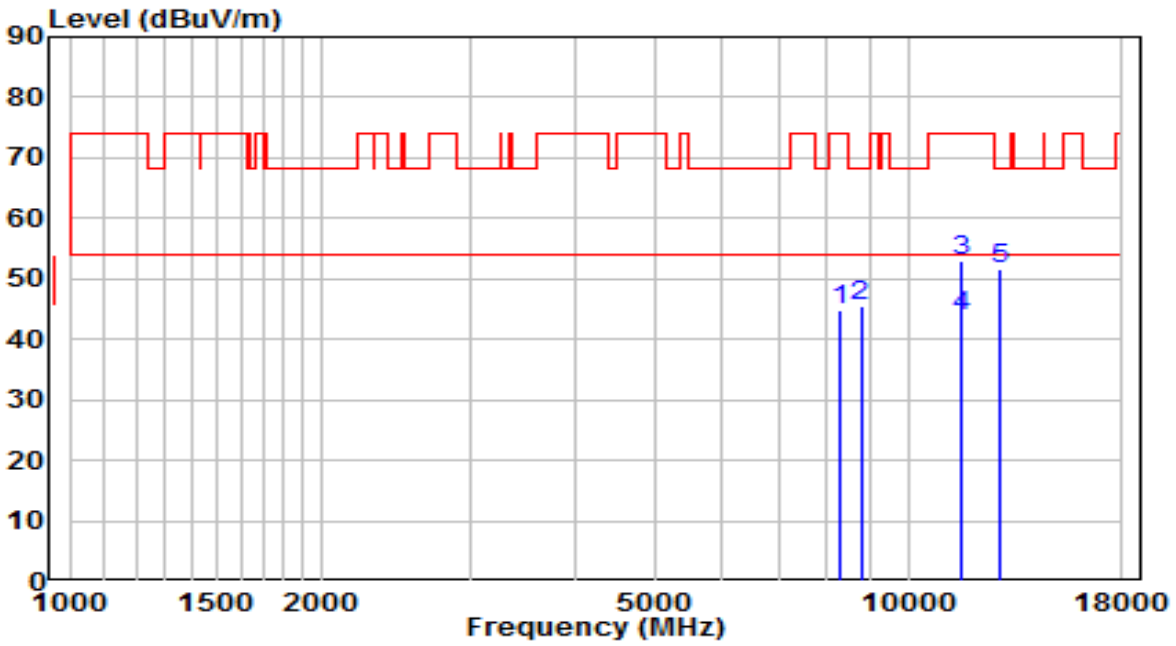


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8310.000	32.39	12.48	44.87	-29.13	74.00	Peak
2		8777.500	32.36	13.13	45.49	-22.71	68.20	Peak
3		11574.000	34.71	18.36	53.07	-20.93	74.00	Peak
4	*	11574.000	25.37	18.36	43.73	-10.27	54.00	Average
5		12874.500	32.52	18.94	51.46	-16.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5785MHz	Test Voltage	110V/60Hz

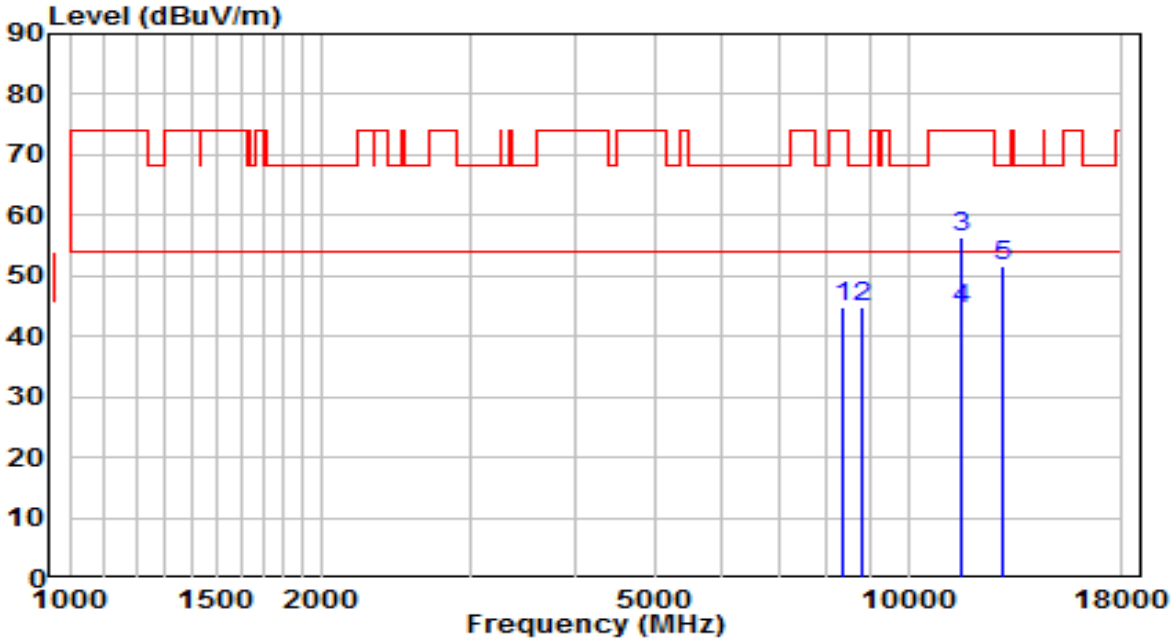


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8335.500	32.30	12.48	44.78	-29.22	74.00	Peak
2		8794.500	31.72	13.18	44.89	-23.31	68.20	Peak
3		11574.000	38.12	18.36	56.47	-17.53	74.00	Peak
4	*	11574.000	26.19	18.36	44.54	-9.46	54.00	Average
5		12934.000	32.40	19.11	51.51	-16.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5825MHz	Test Voltage	110V/60Hz

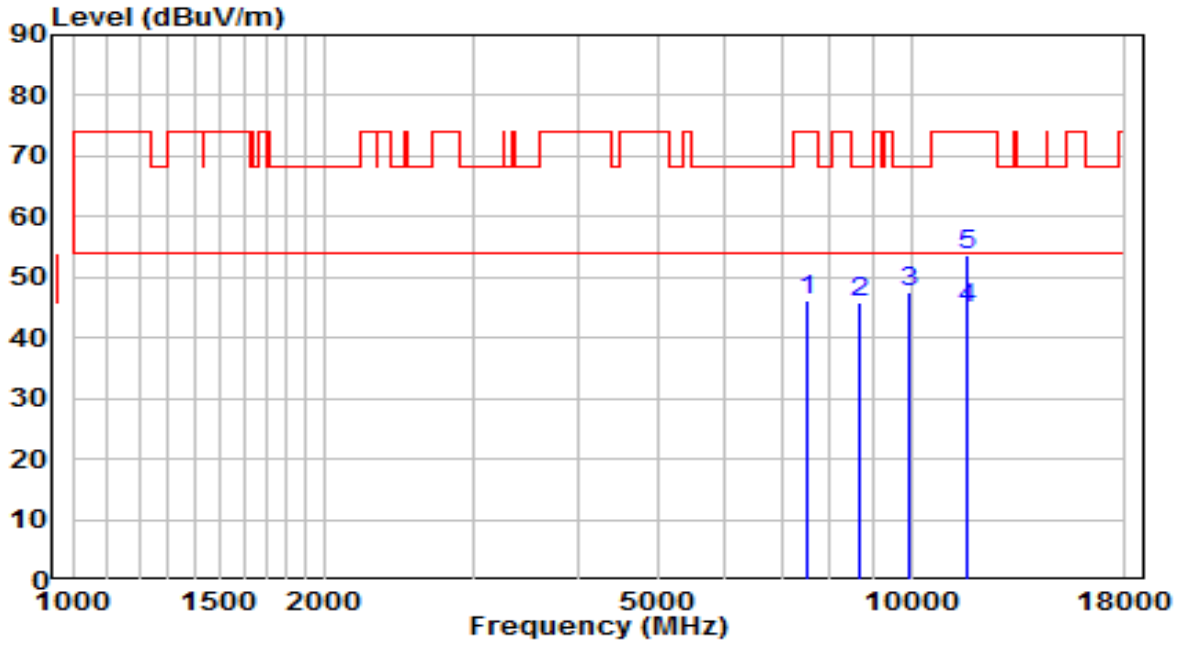


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7528.000	34.26	11.76	46.02	-27.98	74.00	Peak
2		8667.000	33.04	12.86	45.91	-22.29	68.20	Peak
3		9925.000	32.29	15.22	47.51	-20.69	68.20	Peak
4	*	11650.000	26.54	18.26	44.80	-9.20	54.00	Average
5		11650.500	35.50	18.26	53.76	-20.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5825MHz	Test Voltage	110V/60Hz

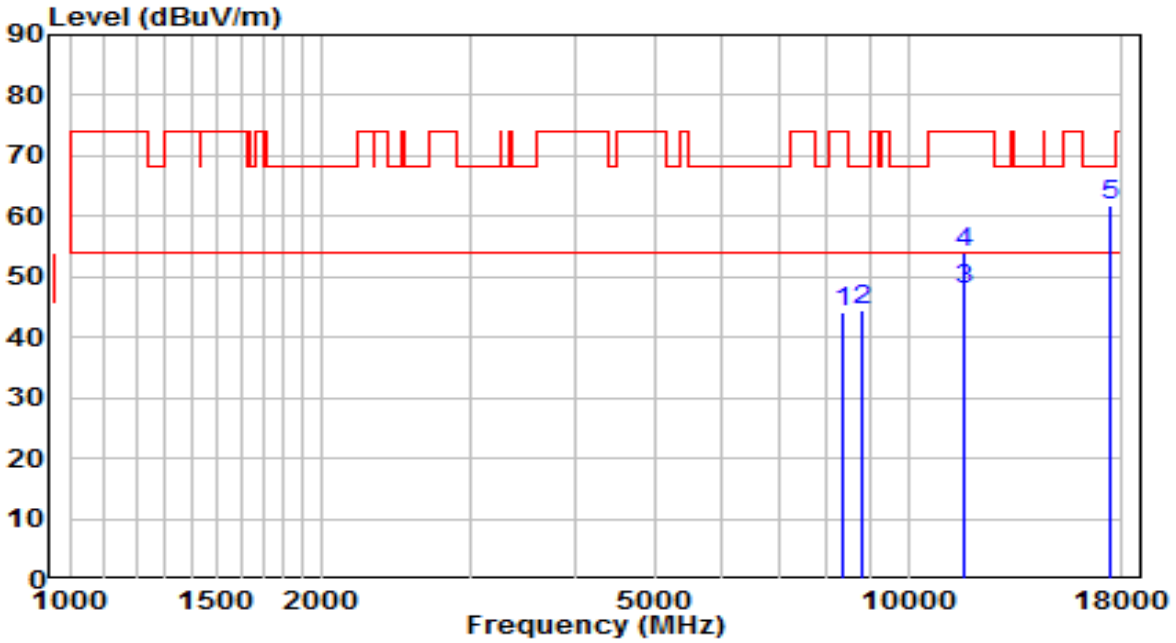


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8327.000	31.68	12.48	44.16	-29.84	74.00	Peak
2		8794.500	31.48	13.18	44.66	-23.54	68.20	Peak
3	*	11650.500	29.55	18.26	47.81	-6.19	54.00	Average
4		11650.500	35.69	18.26	53.95	-20.05	74.00	Peak
5		17473.000	31.53	30.37	61.90	-6.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz	Test Voltage	110V/60Hz

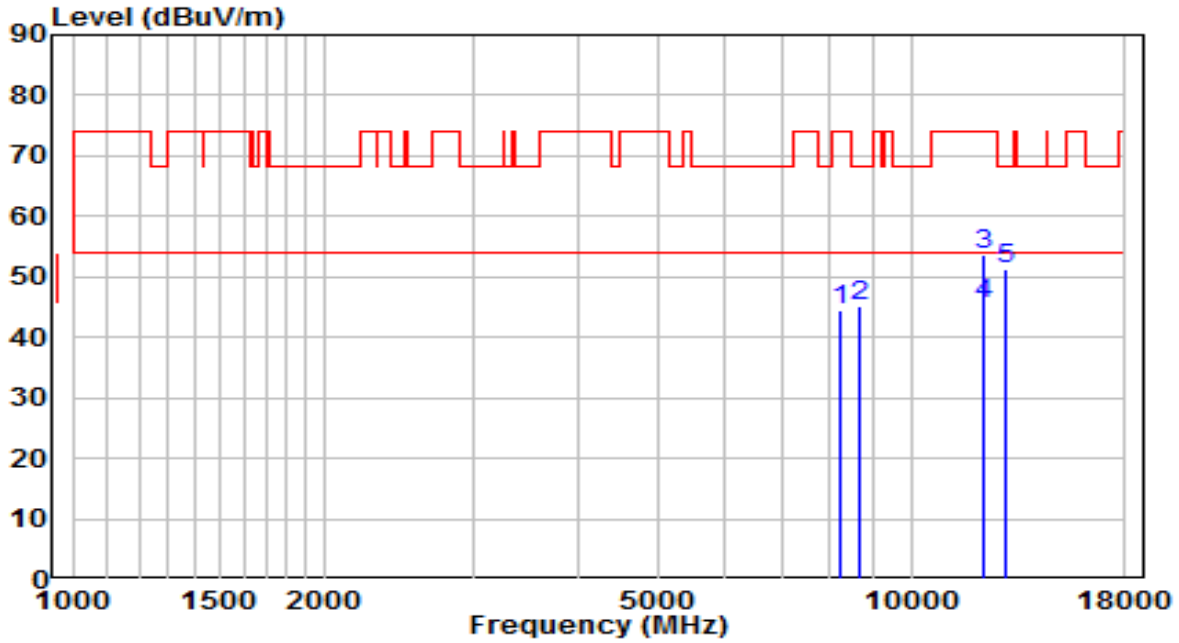


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8225.000	31.89	12.50	44.38	-29.62	74.00	Peak
2		8701.000	32.18	12.95	45.12	-23.08	68.20	Peak
3		12220.000	35.64	17.86	53.50	-20.50	74.00	Peak
4	*	12220.000	27.65	17.86	45.51	-8.49	54.00	Average
5		12968.000	31.96	19.20	51.16	-17.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz	Test Voltage	110V/60Hz

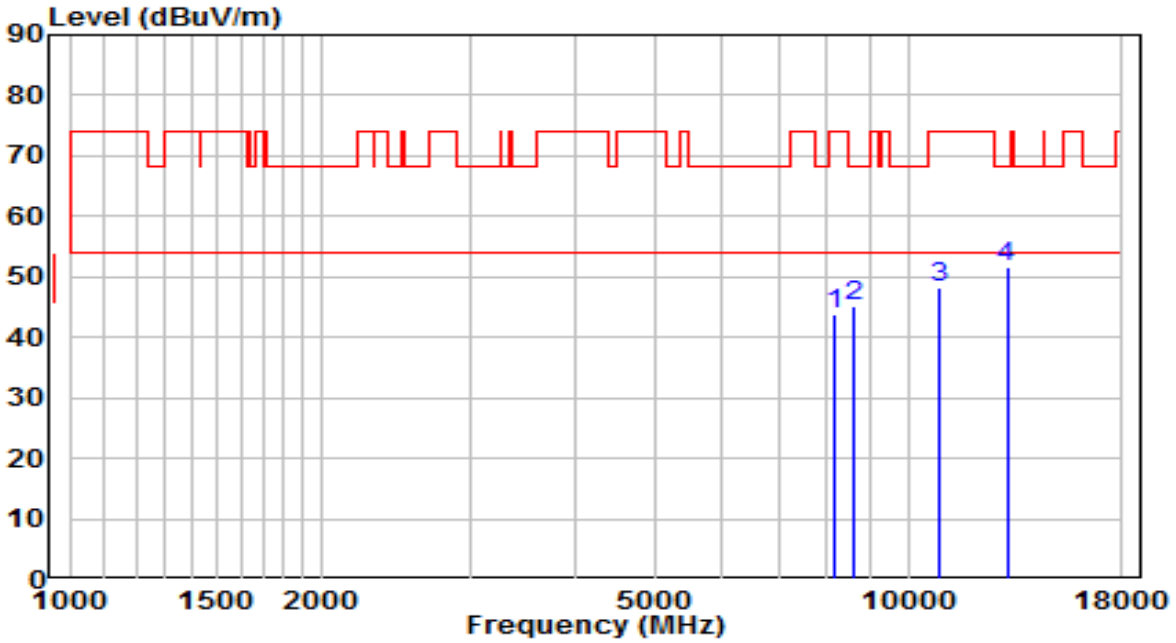


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8174.000	31.39	12.50	43.90	-30.10	74.00	Peak
2		8607.500	32.48	12.72	45.19	-23.01	68.20	Peak
3		10894.000	30.61	17.63	48.24	-25.76	74.00	Peak
4	*	13112.500	32.01	19.57	51.58	-16.62	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5220MHz	Test Voltage	110V/60Hz

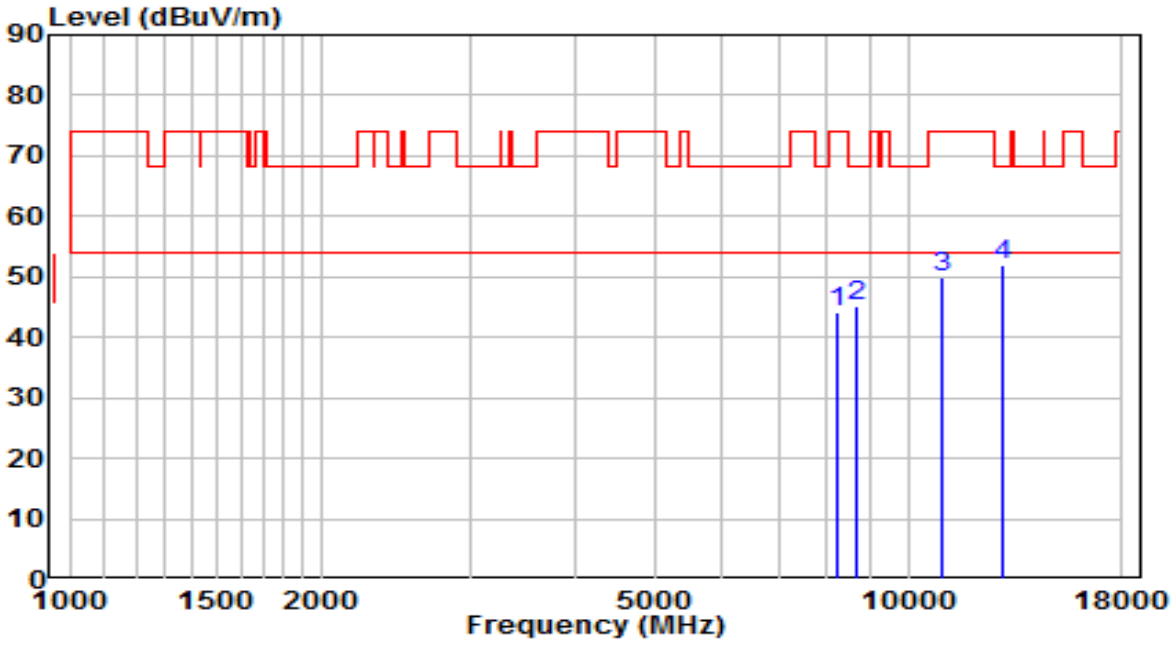


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8208.000	31.70	12.50	44.20	-29.80	74.00	Peak
2		8701.000	32.25	12.95	45.19	-23.01	68.20	Peak
3		10936.500	32.24	17.69	49.93	-24.07	74.00	Peak
4	*	12985.000	32.77	19.25	52.02	-16.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5220MHz	Test Voltage	110V/60Hz

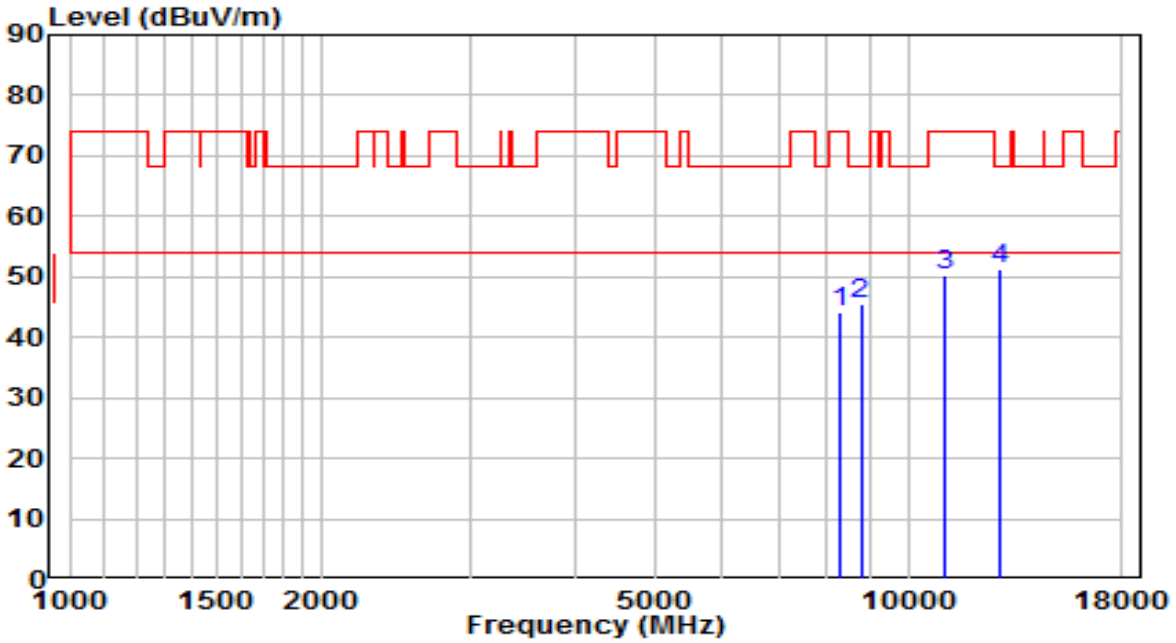


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8293.000	31.82	12.49	44.30	-29.70	74.00	Peak
2		8777.500	32.32	13.13	45.45	-22.75	68.20	Peak
3		11021.500	32.45	17.81	50.26	-23.74	74.00	Peak
4	*	12840.500	32.32	18.85	51.17	-17.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz	Test Voltage	110V/60Hz

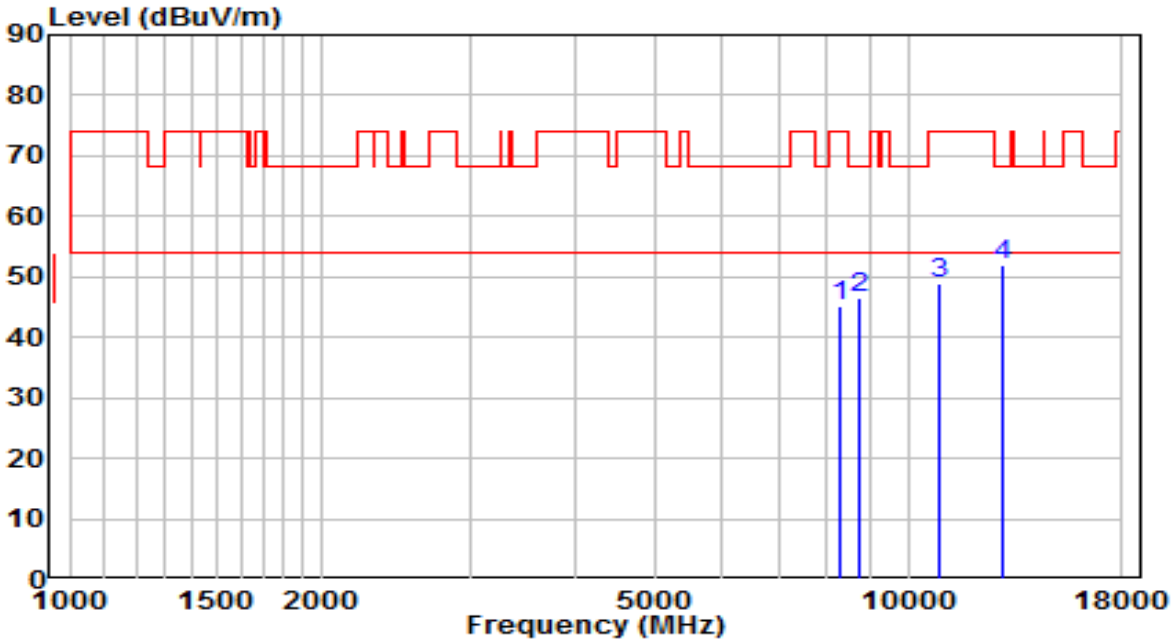


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8301.500	32.68	12.48	45.17	-28.83	74.00	Peak
2		8752.000	33.34	13.07	46.41	-21.79	68.20	Peak
3		10919.500	31.37	17.67	49.04	-24.96	74.00	Peak
4	*	12976.500	32.66	19.22	51.89	-16.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz	Test Voltage	110V/60Hz

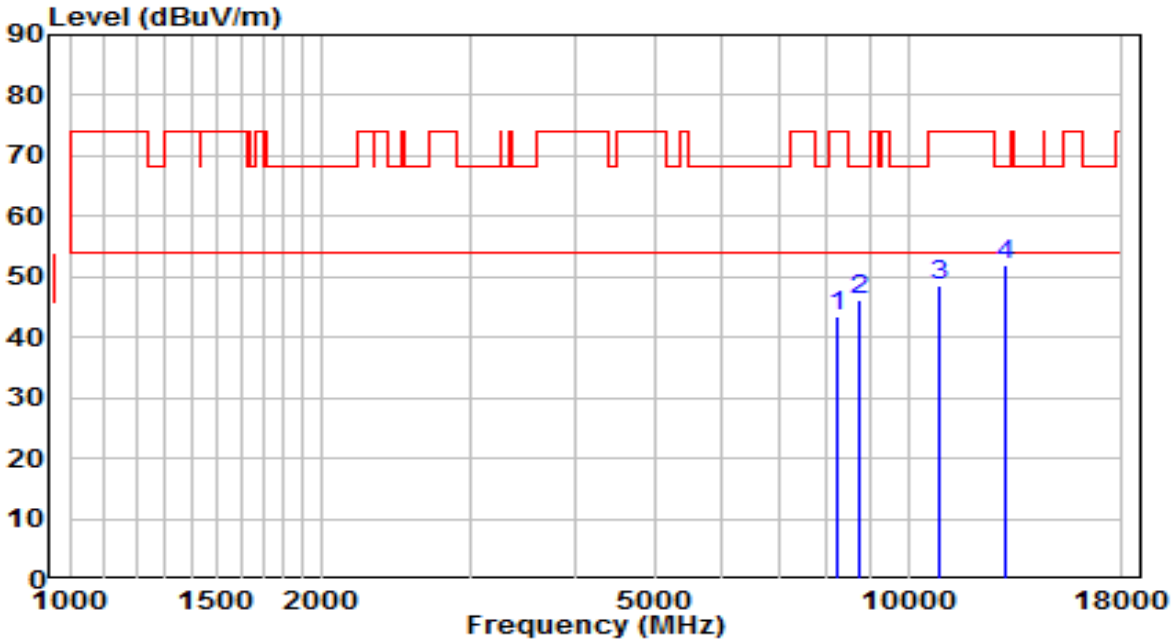


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8225.000	31.00	12.50	43.49	-30.51	74.00	Peak
2		8752.000	33.05	13.07	46.12	-22.08	68.20	Peak
3		10885.500	30.98	17.62	48.60	-25.40	74.00	Peak
4	*	13044.500	32.54	19.40	51.94	-16.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5260MHz	Test Voltage	120V/50Hz

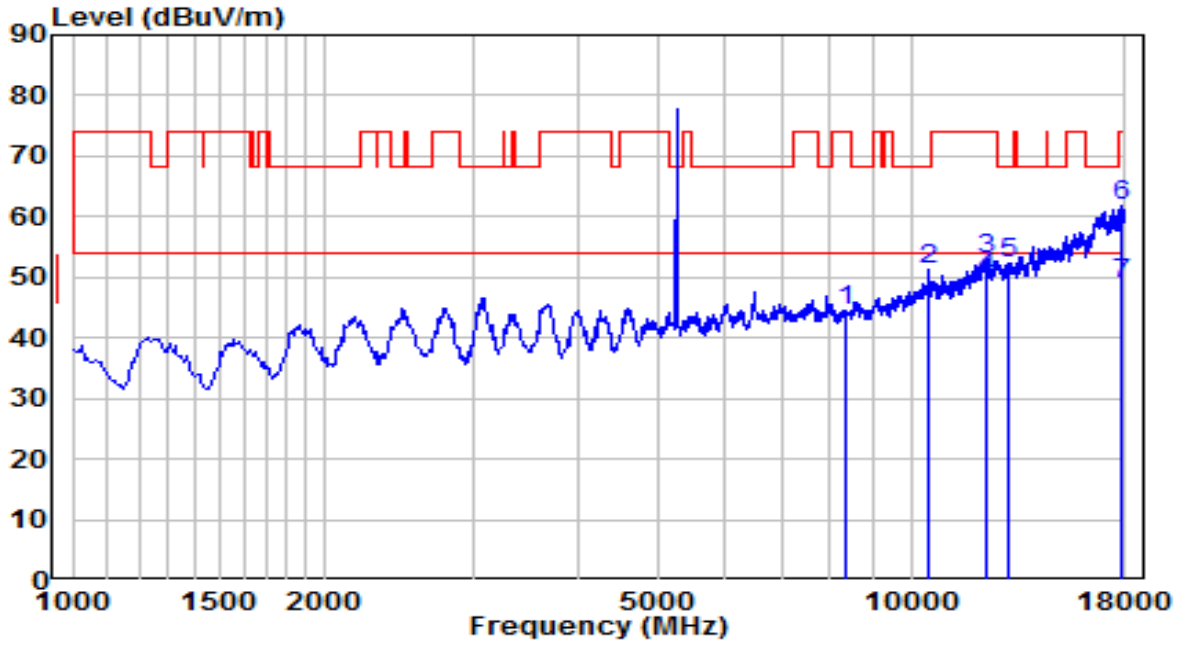


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8344.000	32.08	12.48	44.56	-29.44	74.00	Peak
2		10520.000	34.08	17.10	51.18	-17.02	68.20	Peak
3		12271.000	35.04	17.87	52.91	-21.09	74.00	Peak
4	*	12271.000	32.05	17.87	49.92	-4.08	54.00	Average
5		13027.500	32.90	19.36	52.26	-15.94	68.20	Peak
6		17804.500	30.17	31.51	61.68	-12.32	74.00	Peak
7		17804.500	17.36	31.51	48.87	-5.13	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. We only show the worst case test trace for this mode.
6. Frequent between 5-6GHz is EUT 5260MHz fundamental frequency.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5260MHz	Test Voltage	120V/50Hz

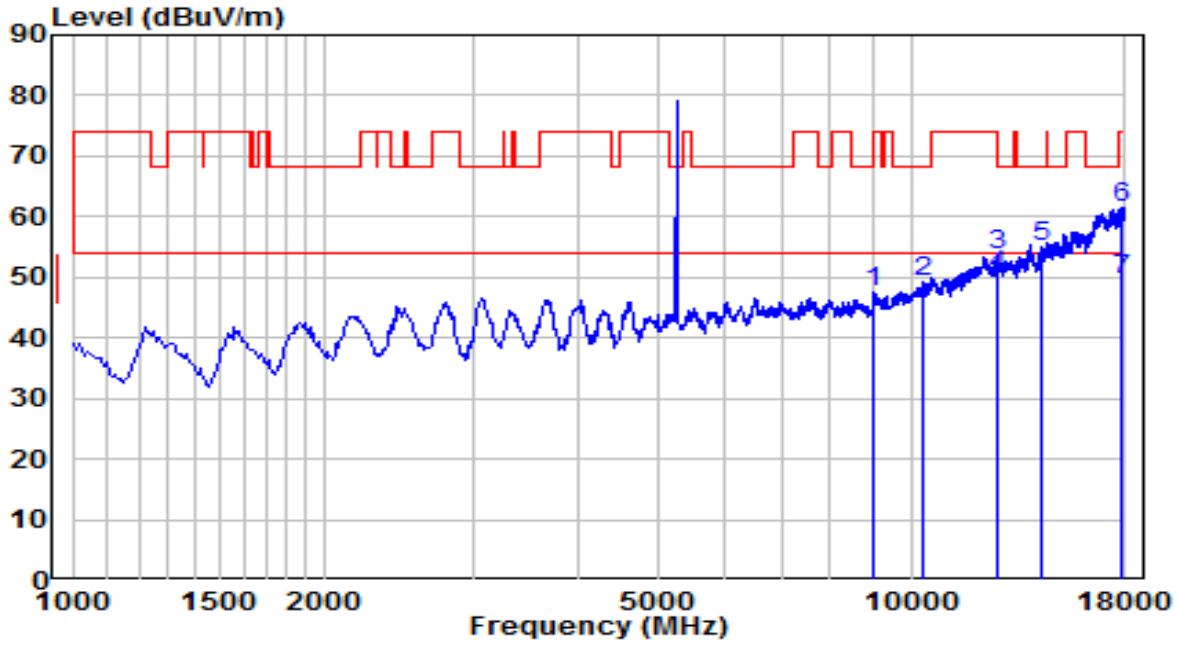


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9041.000	33.87	13.74	47.61	-26.39	74.00	Peak
2		10324.500	32.90	16.47	49.37	-18.83	68.20	Peak
3		12679.000	35.34	18.40	53.74	-20.26	74.00	Peak
4	*	12679.000	31.96	18.40	50.36	-3.64	54.00	Average
5		14268.500	33.53	21.43	54.96	-13.24	68.20	Peak
6		17830.000	29.96	31.58	61.54	-12.46	74.00	Peak
7		17830.000	18.11	31.58	49.69	-4.31	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. We only show the worst case test trace for this mode.
6. Frequent between 5-6GHz is EUT 5260MHz fundamental frequency.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5300MHz	Test Voltage	120V/50Hz

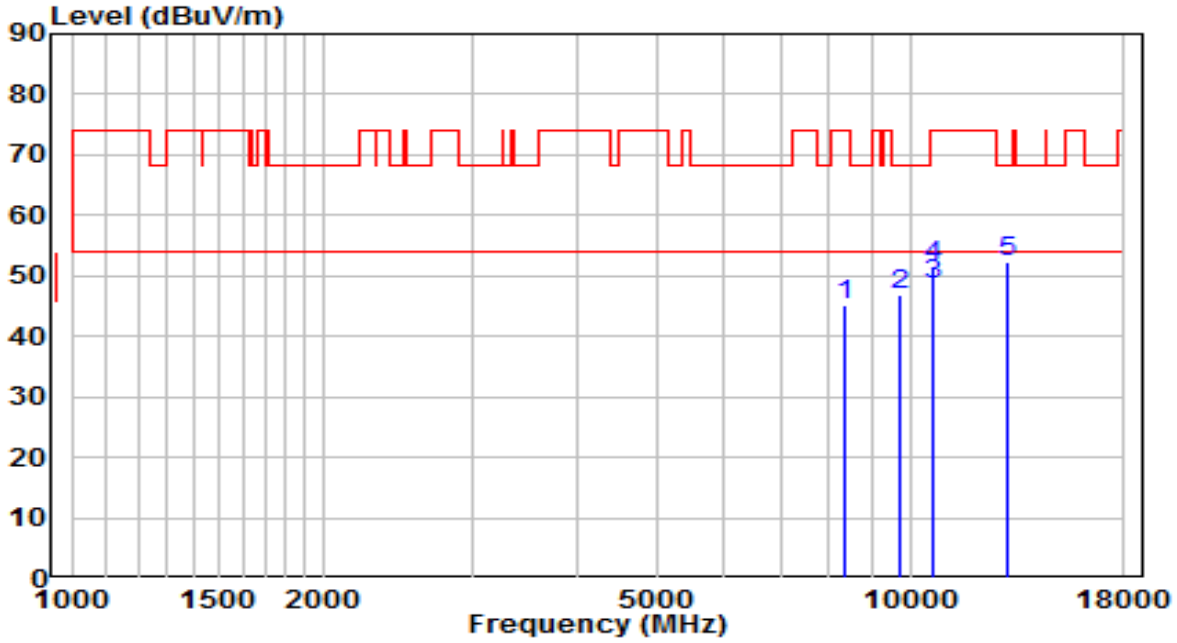

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8361.000	32.83	12.48	45.31	-28.69	74.00	Peak
2		9721.000	31.93	14.84	46.77	-21.43	68.20	Peak
3	*	10630.000	31.15	17.25	48.40	-5.60	54.00	Average
4		10630.500	34.36	17.26	51.62	-22.38	74.00	Peak
5		13087.000	32.95	19.51	52.46	-15.74	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5300MHz	Test Voltage	120V/50Hz

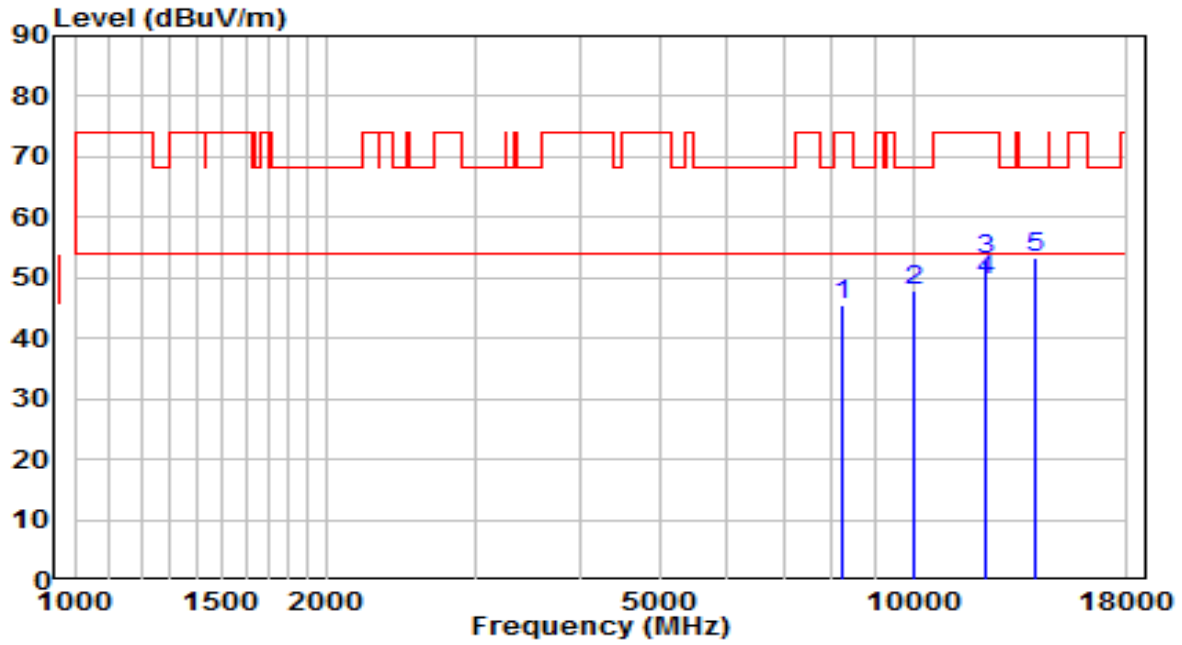

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8259.000	33.10	12.49	45.60	-28.40	74.00	Peak
2		9993.000	32.46	15.35	47.81	-20.39	68.20	Peak
3		12237.000	35.17	17.86	53.03	-20.97	74.00	Peak
4	*	12237.000	31.64	17.86	49.50	-4.50	54.00	Average
5		13962.500	31.93	21.45	53.38	-14.82	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5320MHz	Test Voltage	120V/50Hz

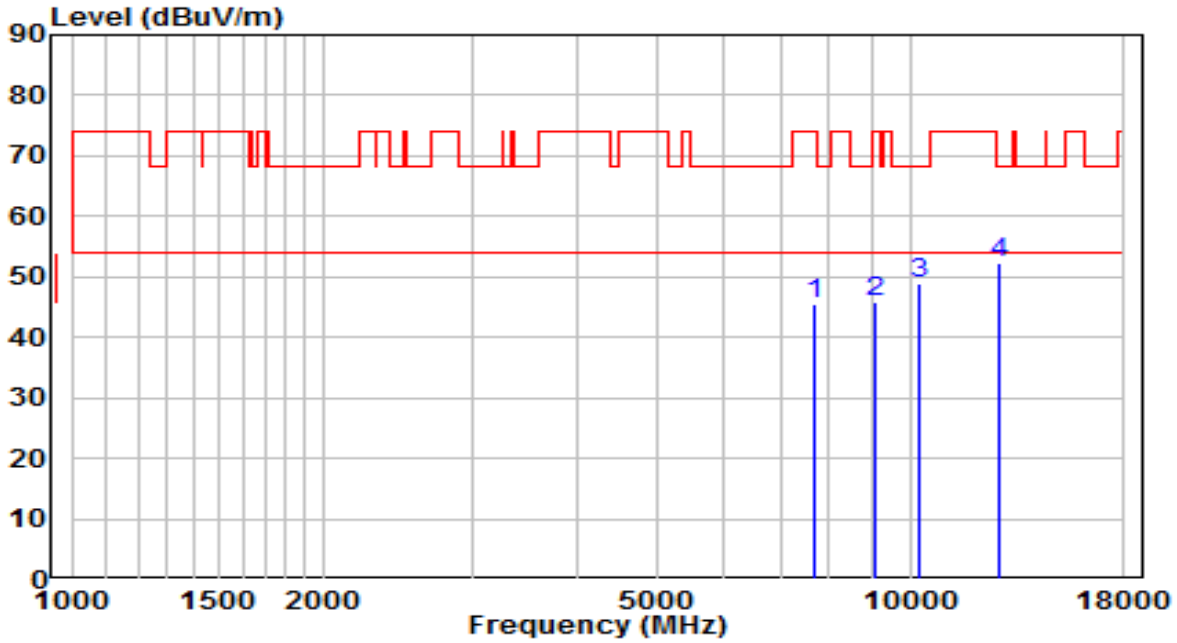

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7706.500	33.30	12.05	45.35	-28.65	74.00	Peak
2		9109.000	32.07	13.84	45.92	-28.08	74.00	Peak
3		10282.000	32.42	16.32	48.74	-19.46	68.20	Peak
4	*	12772.500	33.52	18.66	52.18	-16.02	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5320MHz	Test Voltage	120V/50Hz

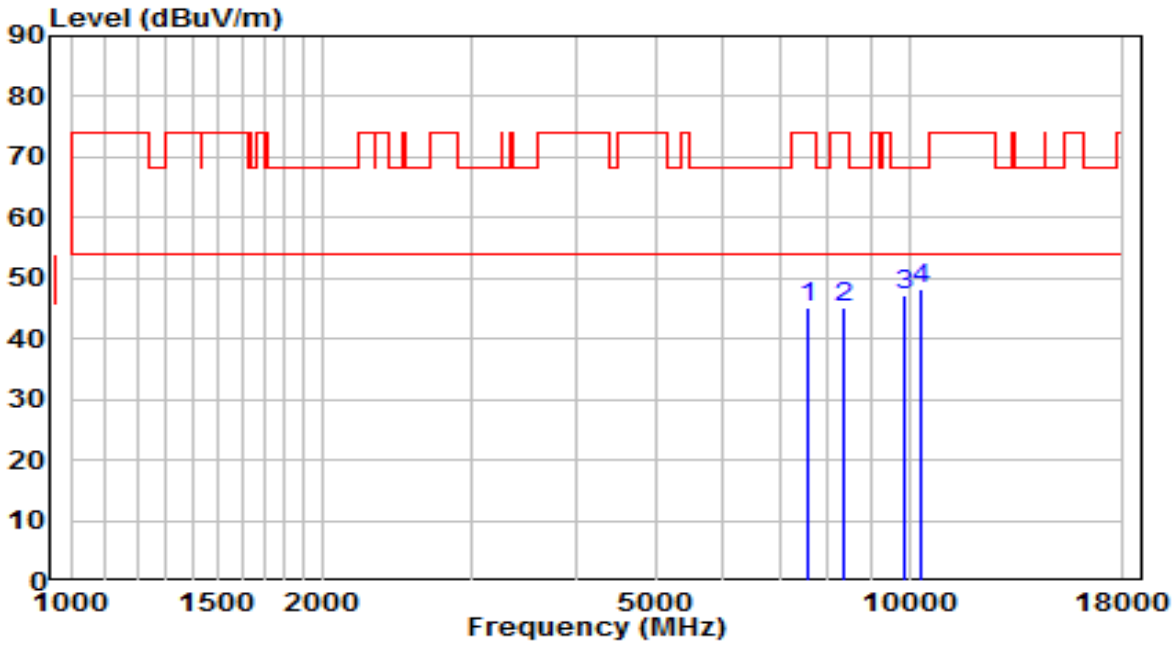


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7562.000	33.27	11.82	45.08	-28.92	74.00	Peak
2		8344.000	32.76	12.48	45.24	-28.76	74.00	Peak
3		9865.500	32.11	15.11	47.22	-20.98	68.20	Peak
4	*	10367.000	31.47	16.62	48.09	-20.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz	Test Voltage	120V/50Hz

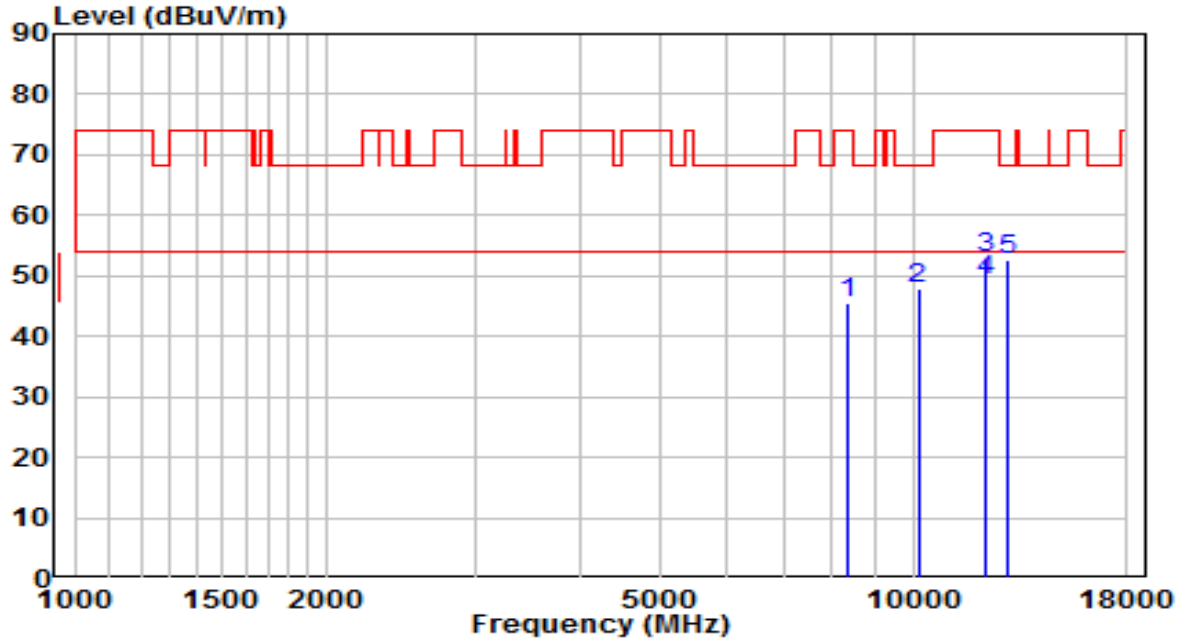


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8327.000	32.96	12.48	45.44	-28.56	74.00	Peak
2		10137.500	32.17	15.83	48.00	-20.20	68.20	Peak
3		12228.500	35.25	17.86	53.11	-20.89	74.00	Peak
4	*	12228.500	31.53	17.86	49.39	-4.61	54.00	Average
5		12993.500	33.34	19.27	52.61	-15.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz	Test Voltage	120V/50Hz

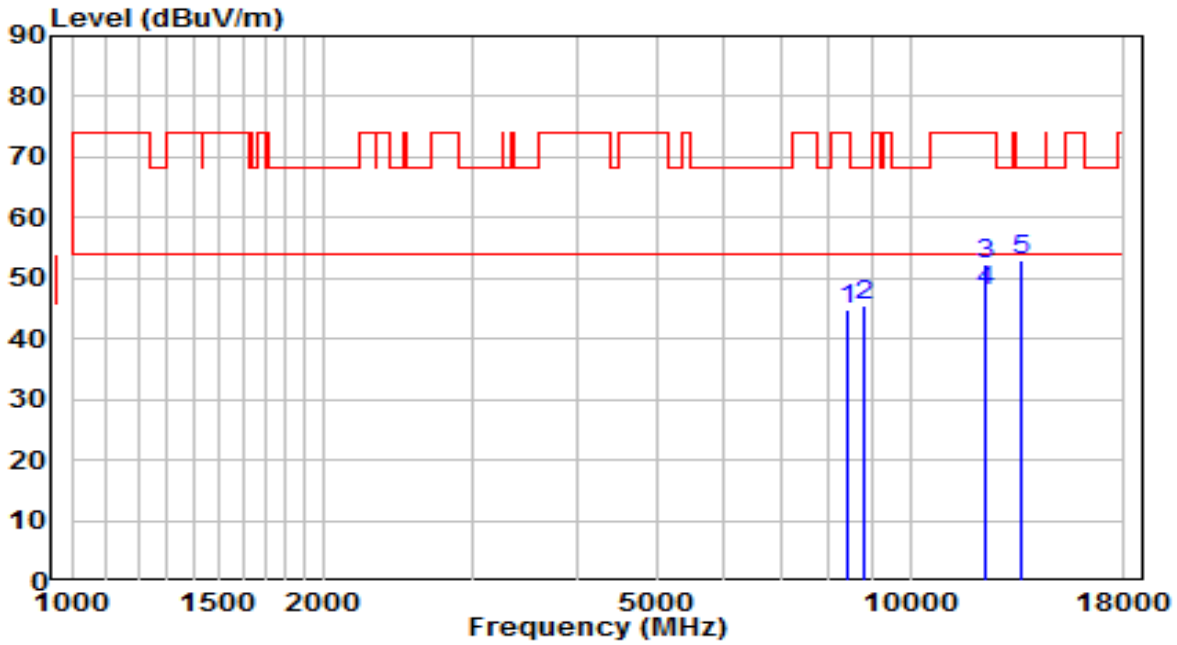


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8395.000	32.41	12.47	44.88	-29.12	74.00	Peak
2		8828.500	32.34	13.26	45.60	-22.60	68.20	Peak
3		12288.000	34.41	17.87	52.28	-21.72	74.00	Peak
4	*	12288.000	30.16	17.87	48.03	-5.97	54.00	Average
5		13571.500	32.39	20.69	53.08	-15.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5580MHz	Test Voltage	120V/50Hz

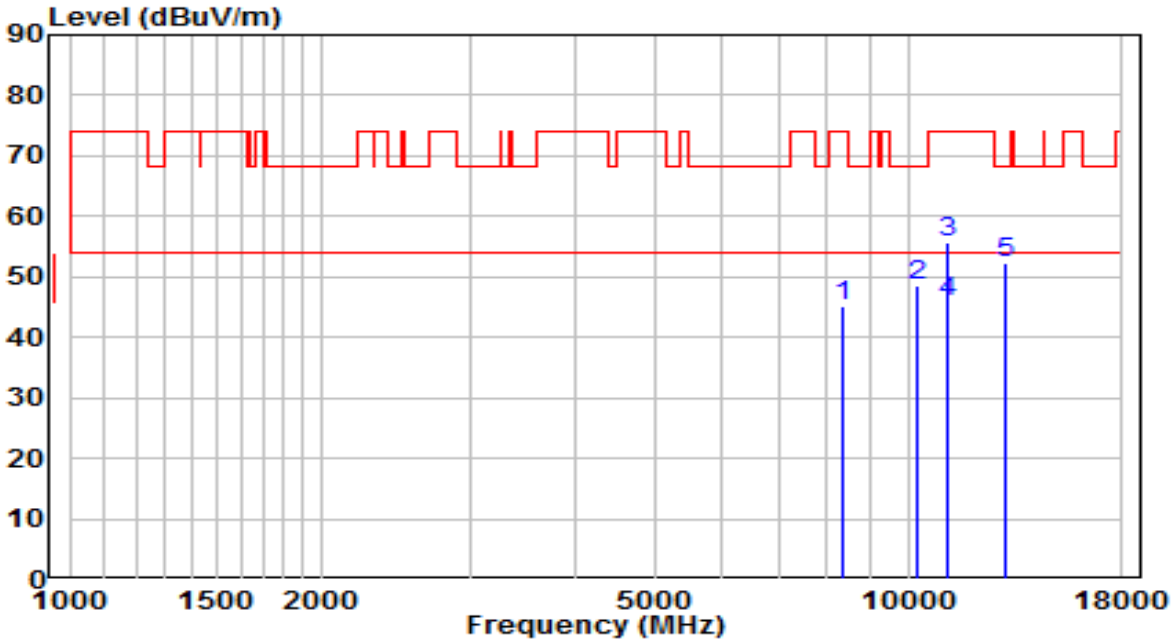


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8361.000	32.59	12.48	45.07	-28.93	74.00	Peak
2		10282.000	32.32	16.32	48.64	-19.56	68.20	Peak
3		11157.500	37.76	17.99	55.75	-18.25	74.00	Peak
4	*	11157.500	27.89	17.99	45.88	-8.12	54.00	Average
5		13053.000	32.86	19.42	52.28	-15.92	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5580MHz	Test Voltage	120V/50Hz

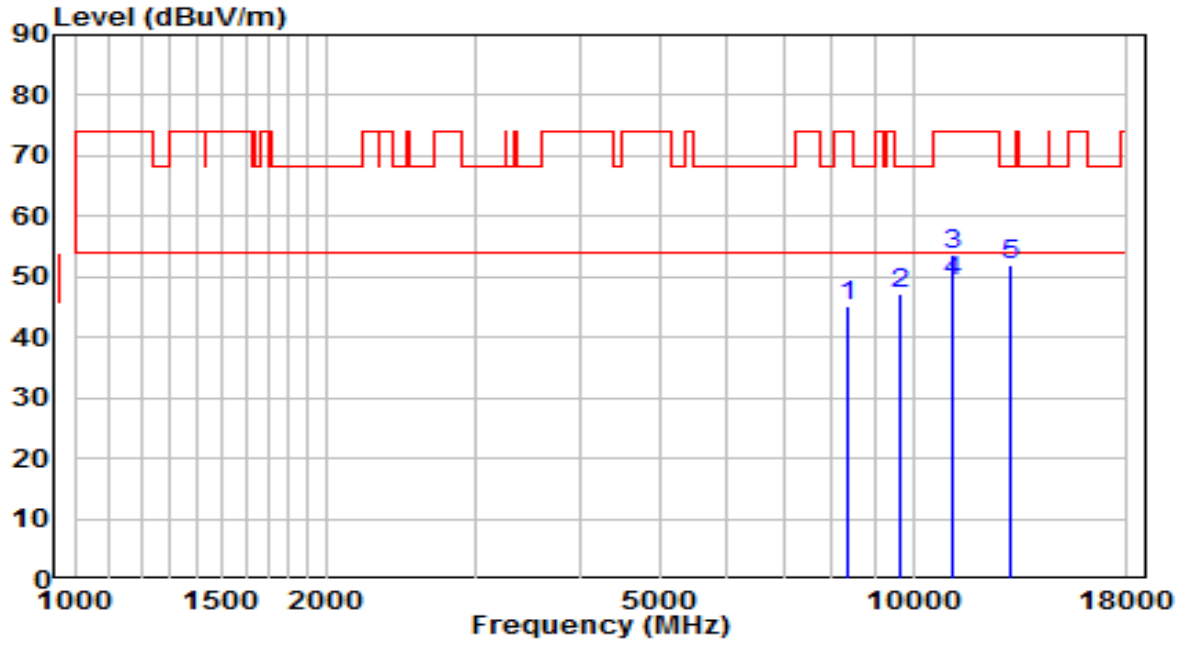


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8386.500	32.60	12.47	45.07	-28.93	74.00	Peak
2		9627.500	32.52	14.66	47.18	-21.02	68.20	Peak
3		11157.500	35.54	17.99	53.53	-20.47	74.00	Peak
4	*	11157.500	31.22	17.99	49.21	-4.79	54.00	Average
5		13070.000	32.41	19.47	51.88	-16.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz	Test Voltage	120V/50Hz

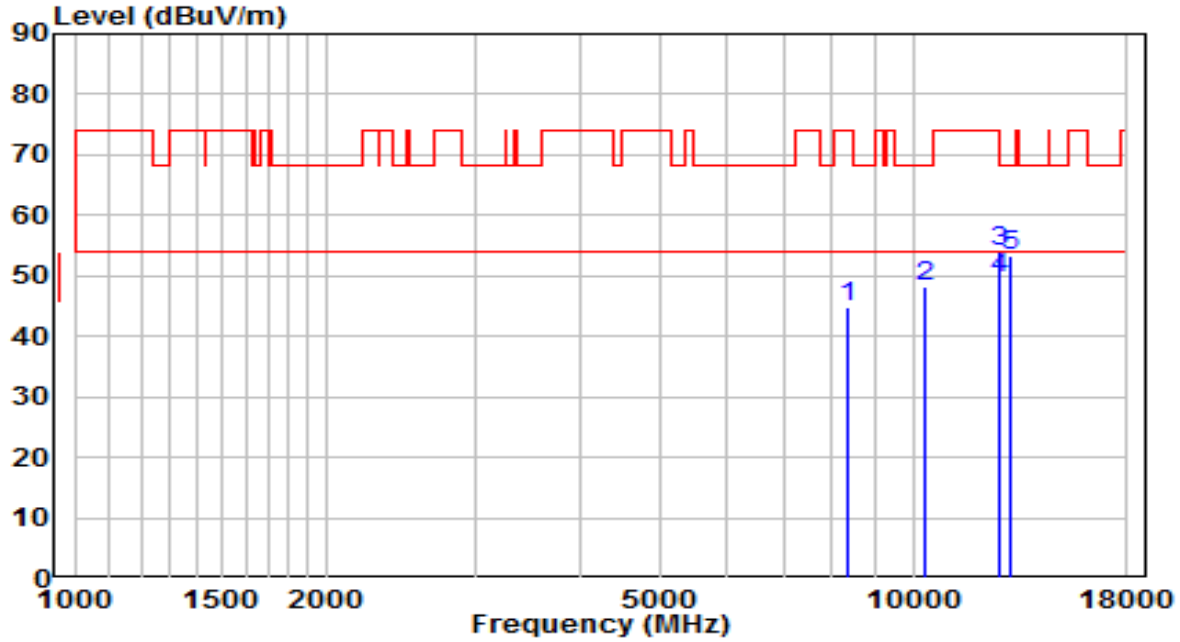


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8335.500	32.26	12.48	44.74	-29.26	74.00	Peak
2		10333.000	31.78	16.50	48.28	-19.92	68.20	Peak
3		12670.500	35.61	18.38	53.98	-20.02	74.00	Peak
4	*	12670.500	31.16	18.38	49.54	-4.46	54.00	Average
5		13104.000	33.91	19.55	53.46	-14.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz	Test Voltage	120V/50Hz

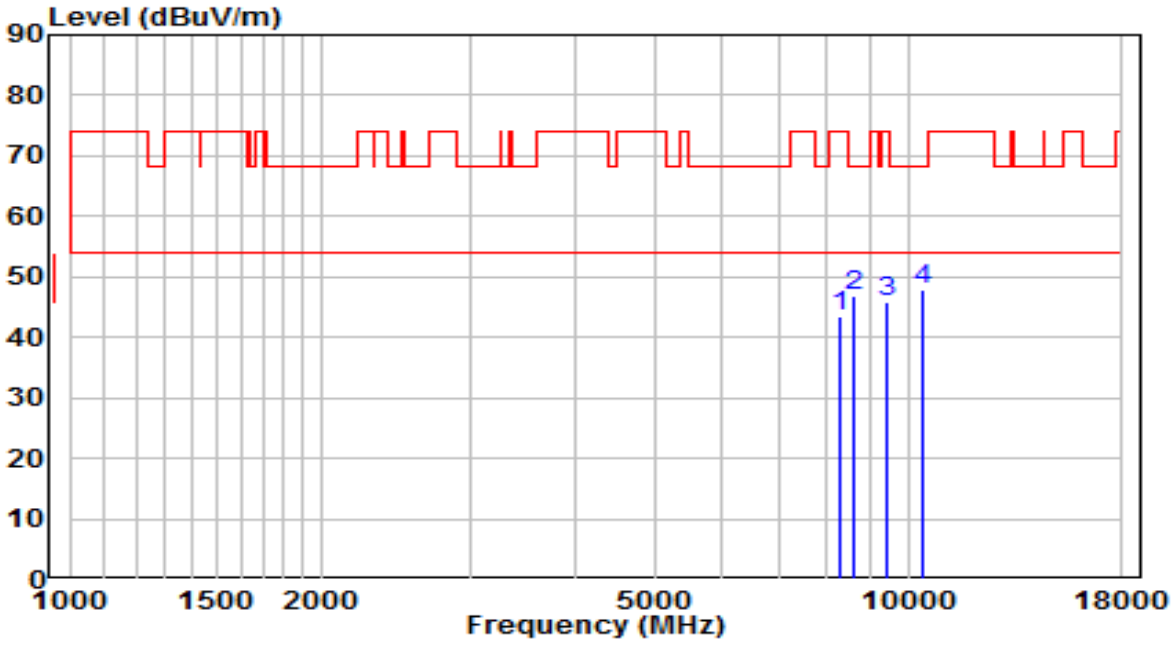


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		8267.500	31.00	12.49	43.49	-30.51	74.00	Peak
2		8599.000	34.12	12.70	46.82	-21.38	68.20	Peak
3		9423.500	31.43	14.31	45.73	-28.27	74.00	Peak
4	*	10418.000	31.03	16.79	47.82	-20.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz	Test Voltage	110V/60Hz

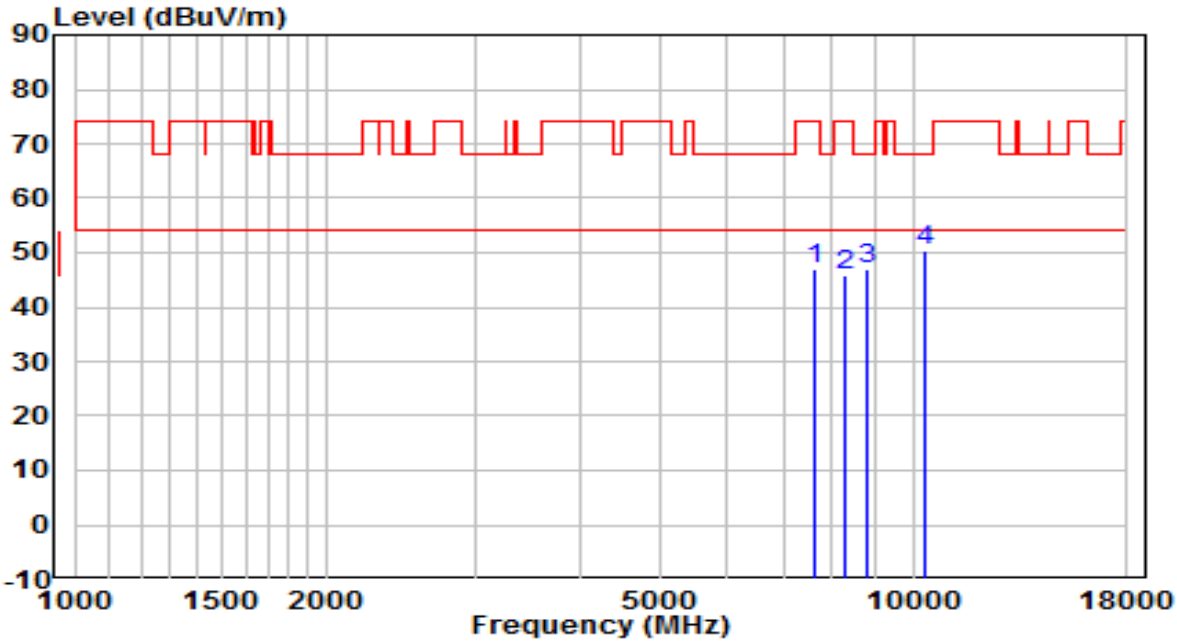


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7630.000	35.12	11.93	47.05	-26.95	74.00	Peak
2		8318.500	33.34	12.48	45.82	-28.18	74.00	Peak
3		8794.500	33.81	13.18	46.98	-21.22	68.20	Peak
4	*	10324.500	33.82	16.47	50.29	-17.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz	Test Voltage	110V/60Hz

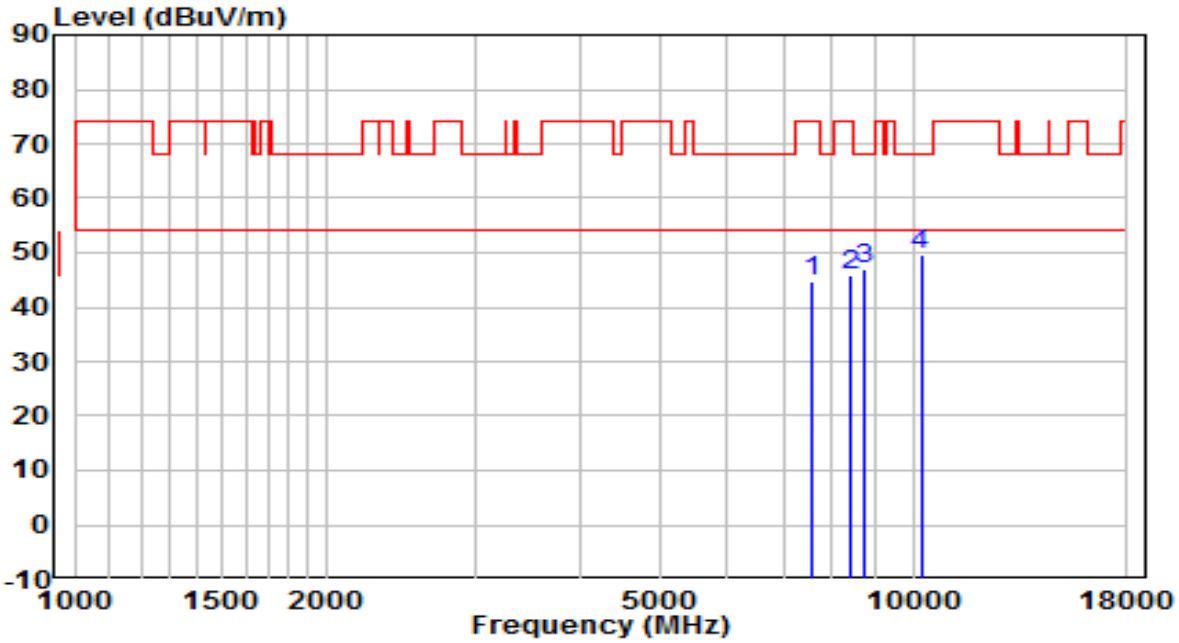


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7587.500	32.76	11.86	44.62	-29.38	74.00	Peak
2		8412.000	33.41	12.47	45.88	-28.12	74.00	Peak
3		8752.000	33.91	13.07	46.98	-21.22	68.20	Peak
4	*	10214.000	33.36	16.09	49.46	-18.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	110V/60Hz

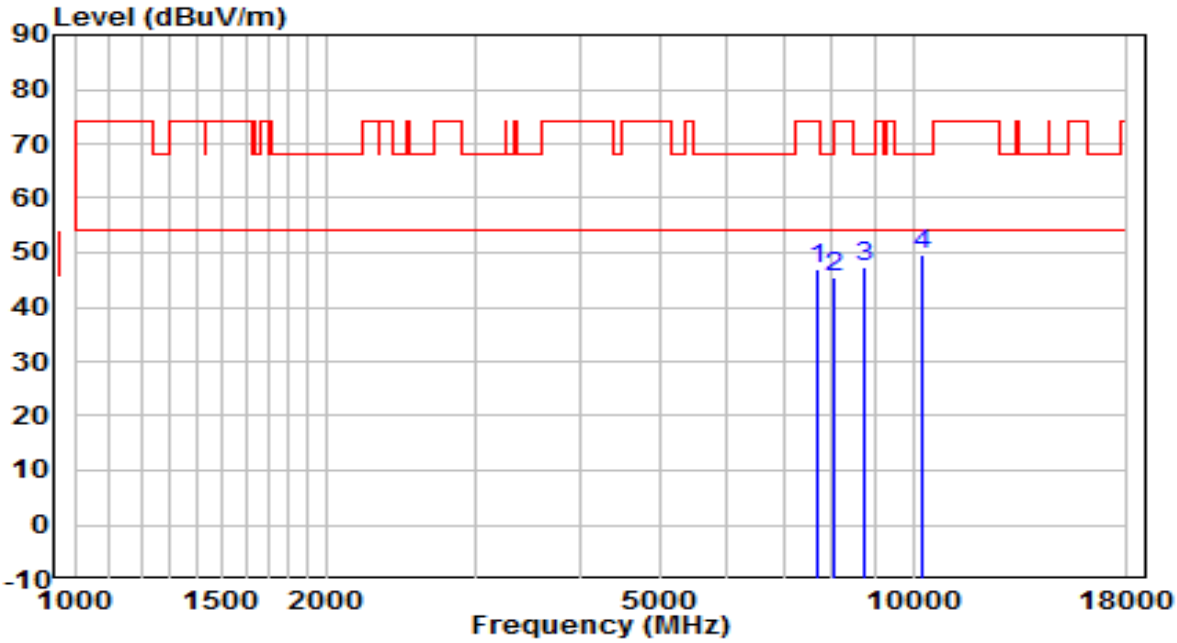


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7664.000	34.91	11.98	46.89	-27.11	74.00	Peak
2		8063.500	32.82	12.52	45.34	-28.66	74.00	Peak
3		8769.000	34.35	13.11	47.47	-20.73	68.20	Peak
4	*	10265.000	33.21	16.27	49.48	-18.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	110V/60Hz

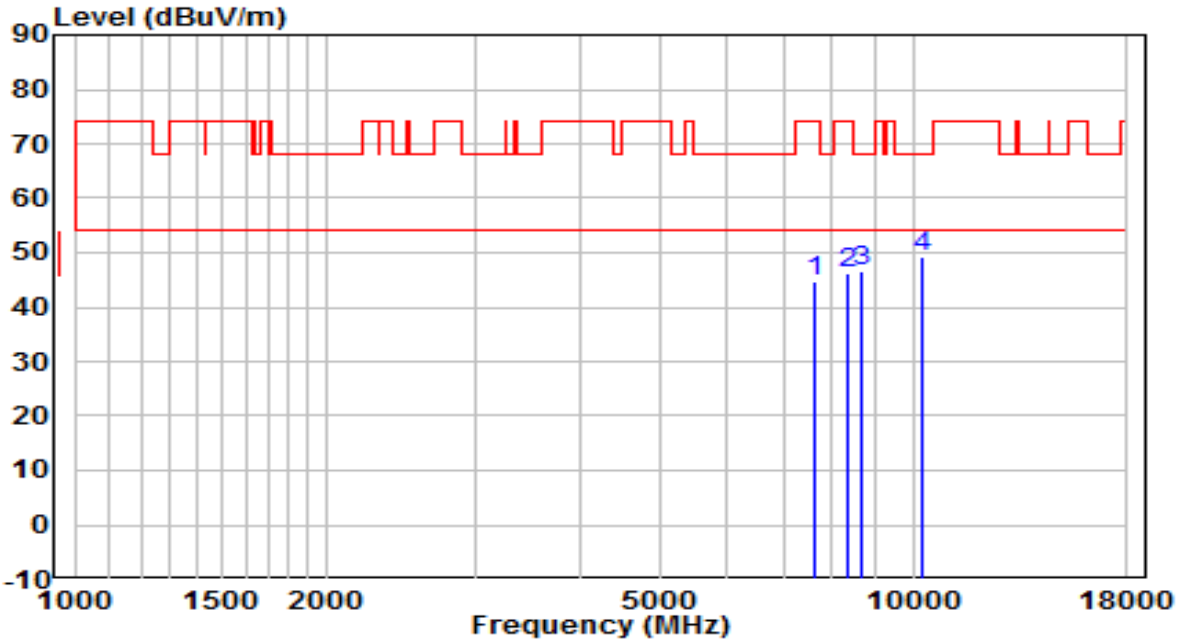


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7647.000	32.75	11.95	44.70	-29.30	74.00	Peak
2		8378.000	33.70	12.47	46.17	-27.83	74.00	Peak
3		8667.000	33.63	12.86	46.49	-21.71	68.20	Peak
4	*	10282.000	32.85	16.32	49.17	-19.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz	Test Voltage	110V/60Hz

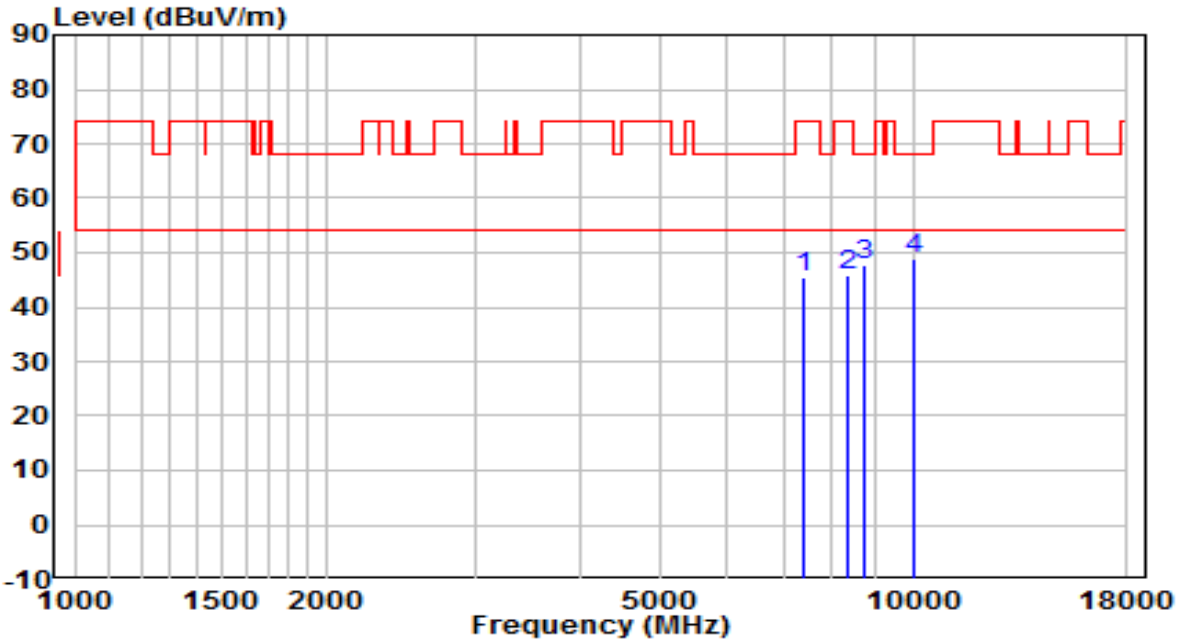


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7383.500	34.01	11.39	45.40	-28.60	74.00	Peak
2		8335.500	33.44	12.48	45.92	-28.08	74.00	Peak
3		8760.500	34.66	13.09	47.76	-20.44	68.20	Peak
4	*	10044.000	33.53	15.51	49.05	-19.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz	Test Voltage	110V/60Hz

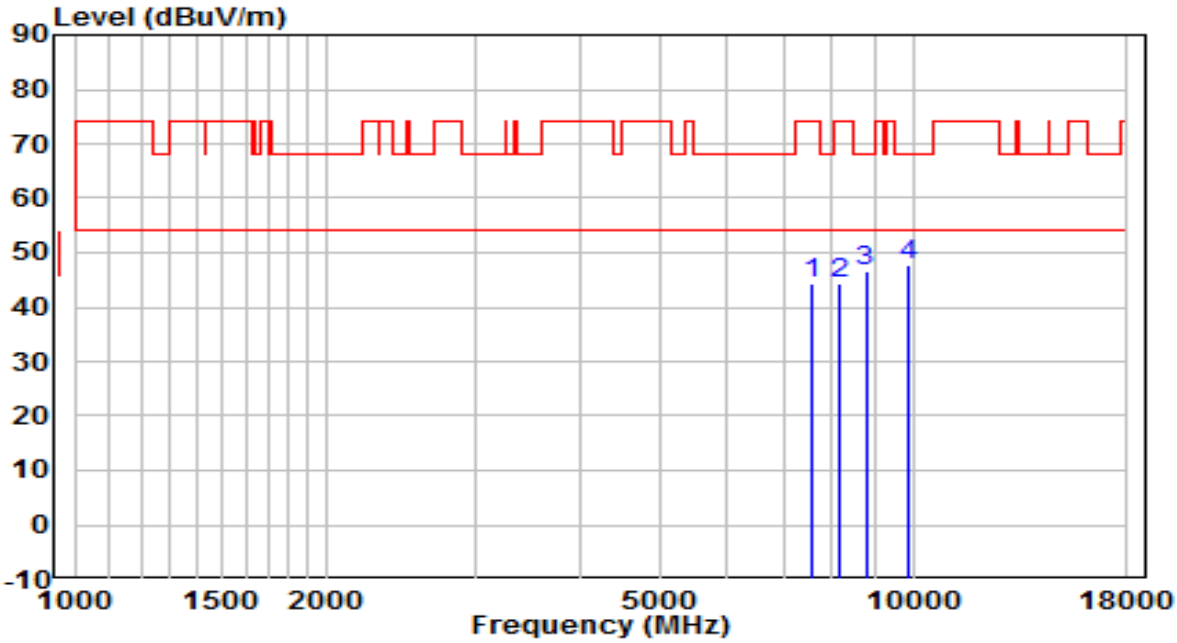


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7596.000	32.58	11.87	44.45	-29.55	74.00	Peak
2		8191.000	32.02	12.50	44.52	-29.48	74.00	Peak
3		8777.500	33.48	13.13	46.61	-21.59	68.20	Peak
4	*	9882.500	32.53	15.14	47.67	-20.53	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	110V/60Hz

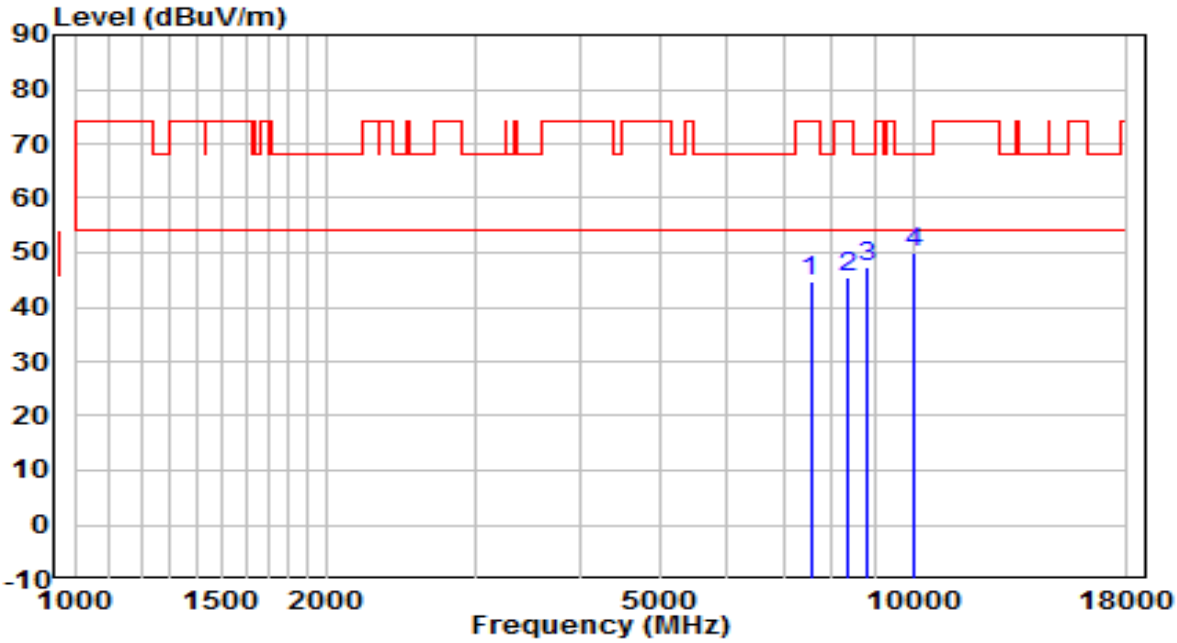


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7545.000	32.85	11.79	44.64	-29.36	74.00	Peak
2		8335.500	32.82	12.48	45.30	-28.70	74.00	Peak
3		8786.000	34.05	13.16	47.21	-20.99	68.20	Peak
4	*	10052.500	34.35	15.54	49.89	-18.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	110V/60Hz

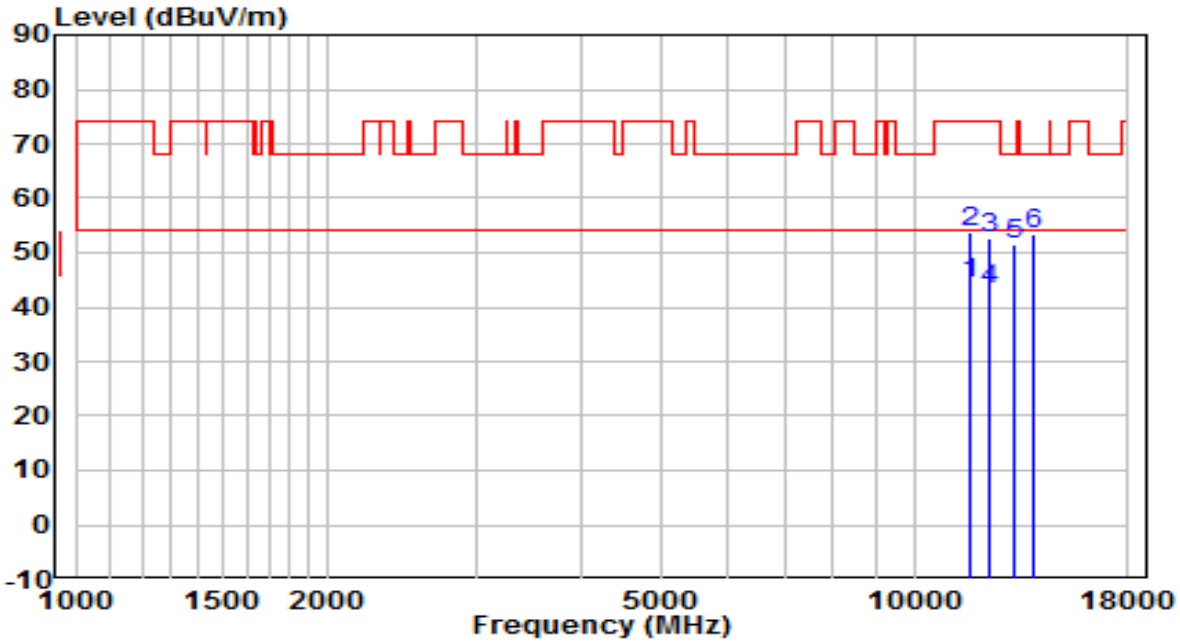


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	11650.000	25.95	18.26	44.21	-9.79	54.00	Average
2		11650.500	35.60	18.26	53.86	-20.14	74.00	Peak
3		12262.500	34.73	17.86	52.59	-21.41	74.00	Peak
4		12262.500	25.16	17.86	43.02	-10.98	54.00	Average
5		13129.500	31.81	19.62	51.43	-16.77	68.20	Peak
6		13886.000	31.93	21.30	53.23	-14.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

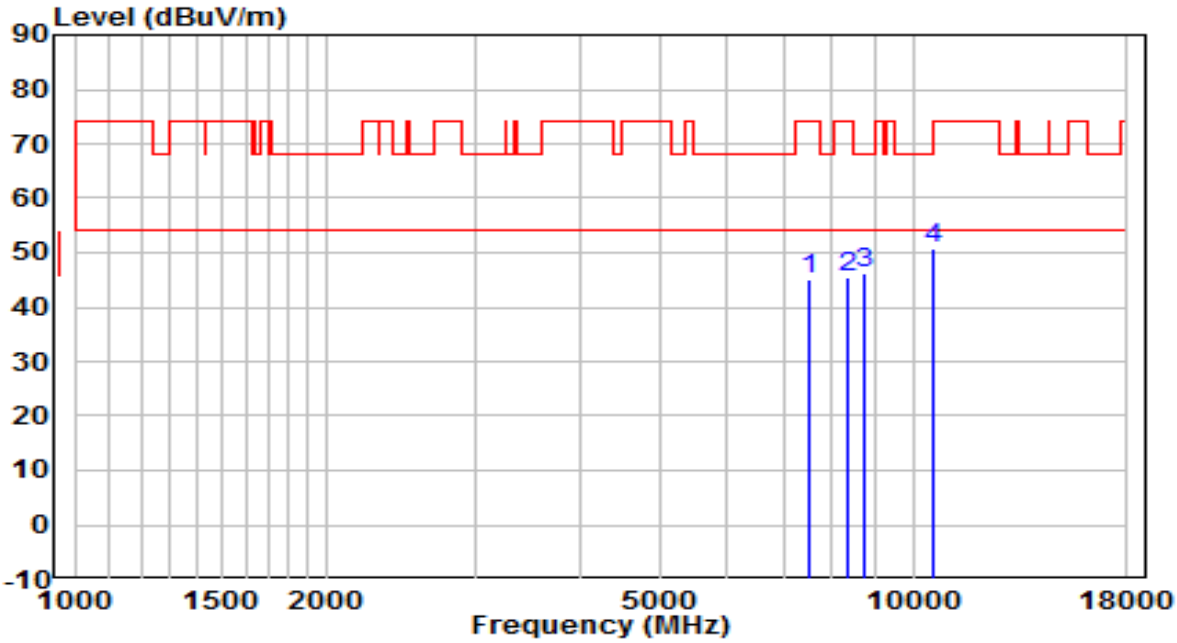


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7519.500	33.41	11.75	45.16	-28.84	74.00	Peak
2		8335.500	32.83	12.48	45.31	-28.69	74.00	Peak
3		8743.500	33.14	13.05	46.20	-22.00	68.20	Peak
4	*	10579.500	33.46	17.18	50.64	-17.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

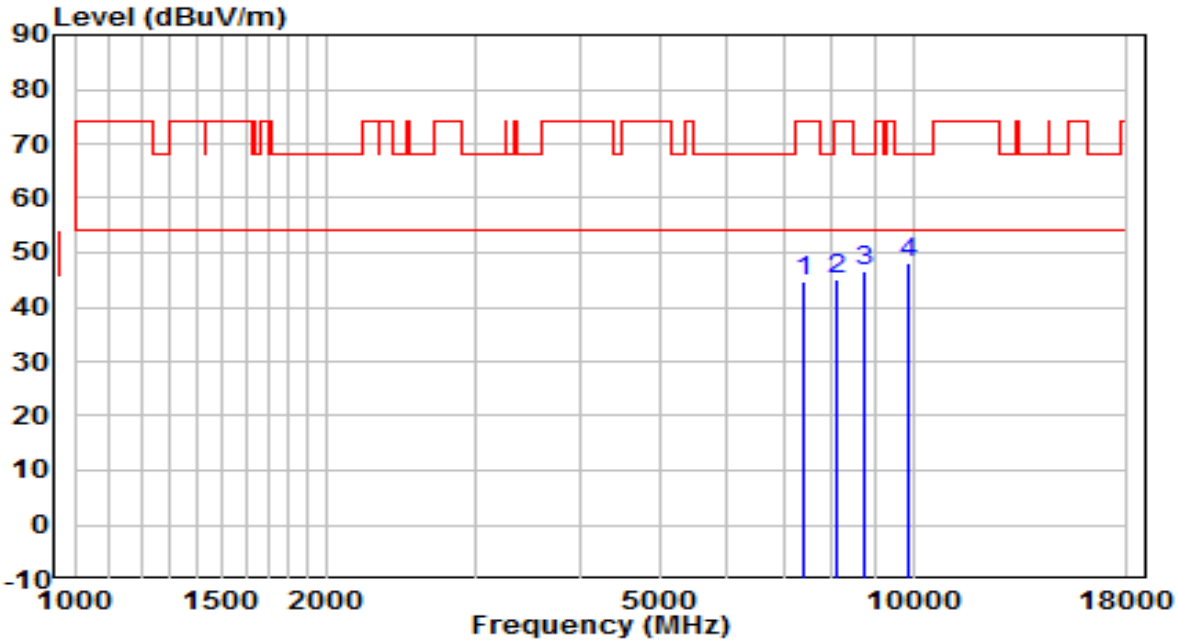


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7383.500	33.43	11.39	44.82	-29.18	74.00	Peak
2		8106.000	32.76	12.51	45.28	-28.72	74.00	Peak
3		8752.000	33.41	13.07	46.48	-21.72	68.20	Peak
4	*	9865.500	32.91	15.11	48.02	-20.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	110V/60Hz

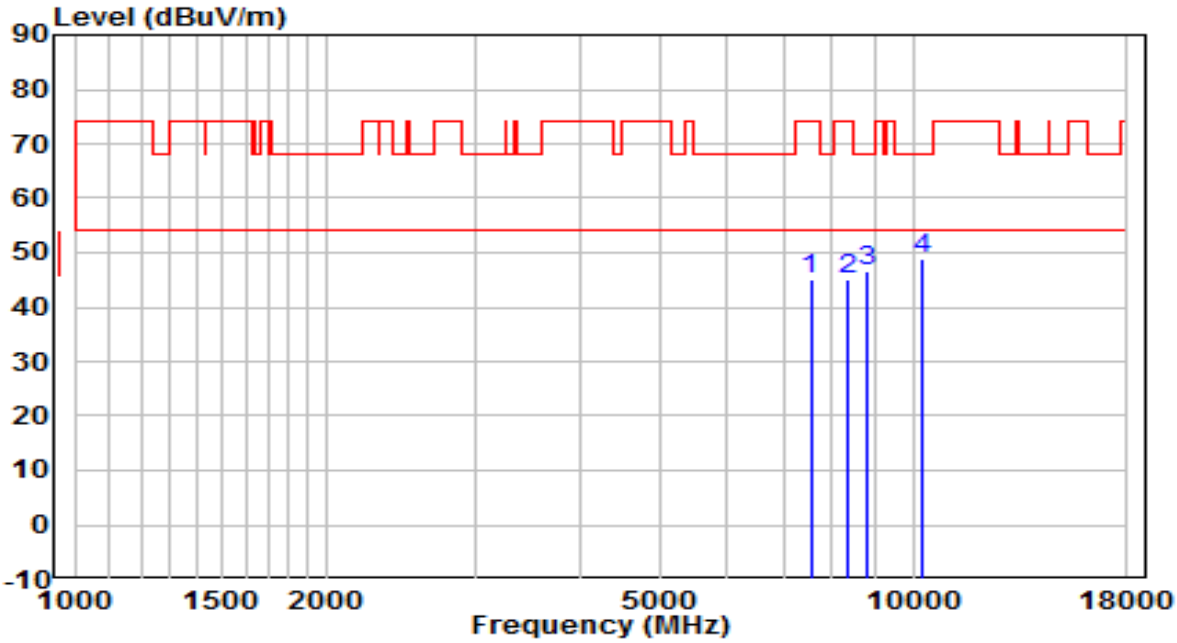


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7545.000	33.19	11.79	44.98	-29.02	74.00	Peak
2		8369.500	32.78	12.47	45.26	-28.74	74.00	Peak
3		8786.000	33.48	13.16	46.64	-21.56	68.20	Peak
4	*	10239.500	32.76	16.18	48.93	-19.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	110V/60Hz

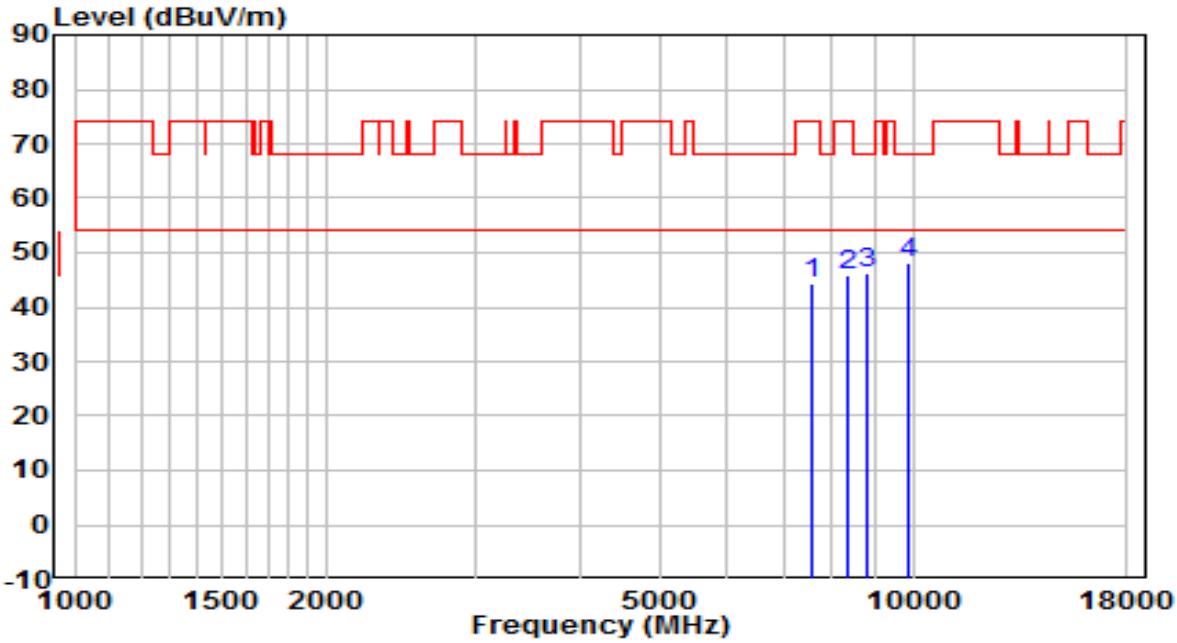


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7553.500	32.68	11.80	44.49	-29.51	74.00	Peak
2		8386.500	33.34	12.47	45.81	-28.19	74.00	Peak
3		8828.500	32.86	13.26	46.12	-22.08	68.20	Peak
4	*	9865.500	33.07	15.11	48.17	-20.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz	Test Voltage	110V/60Hz

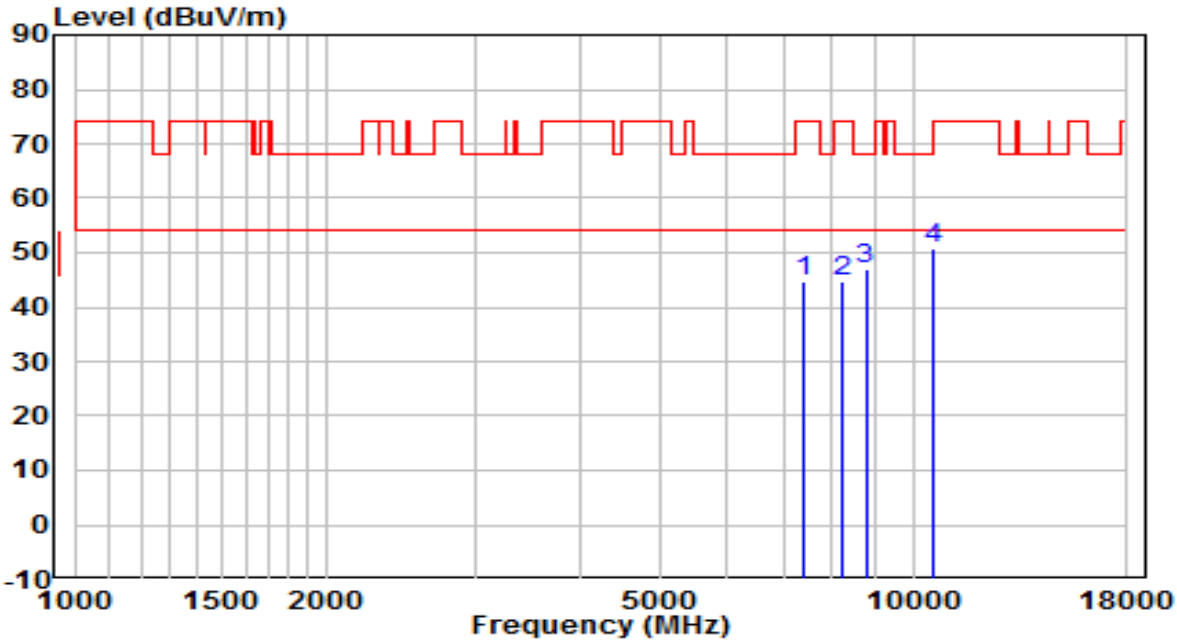


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7409.000	33.15	11.46	44.61	-29.39	74.00	Peak
2		8225.000	32.41	12.50	44.90	-29.10	74.00	Peak
3		8777.500	33.93	13.13	47.07	-21.13	68.20	Peak
4	*	10537.000	33.72	17.12	50.84	-17.36	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz	Test Voltage	110V/60Hz

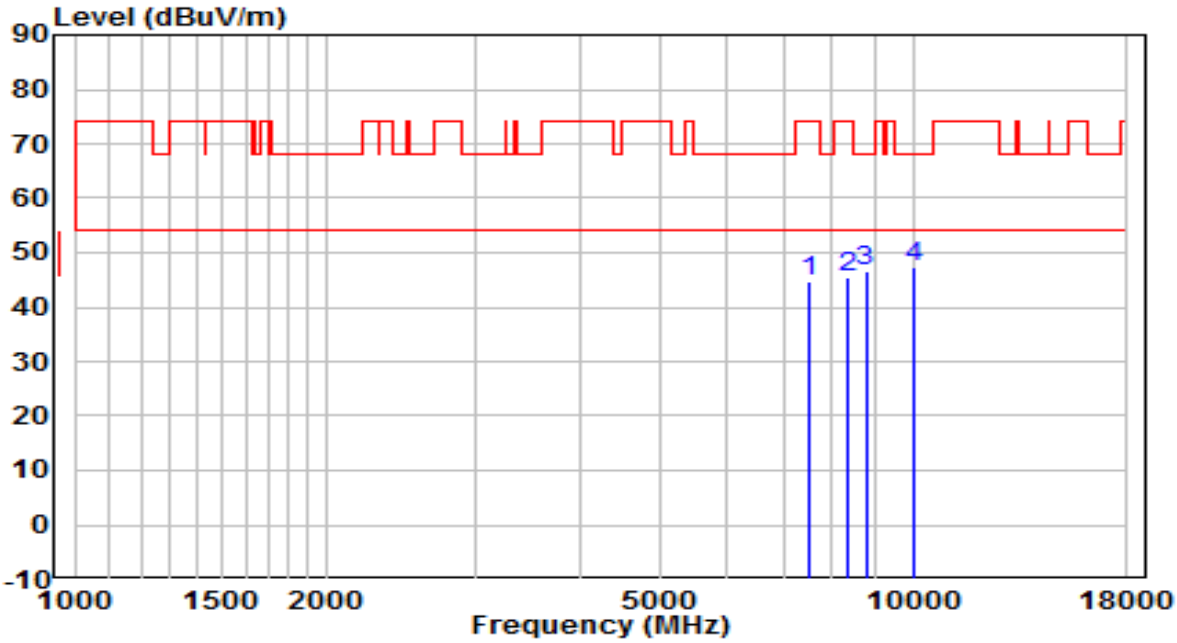


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7494.000	32.98	11.70	44.68	-29.32	74.00	Peak
2		8327.000	32.87	12.48	45.35	-28.65	74.00	Peak
3		8777.500	33.49	13.13	46.63	-21.57	68.20	Peak
4	*	10035.500	31.92	15.48	47.40	-20.80	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	110V/60Hz

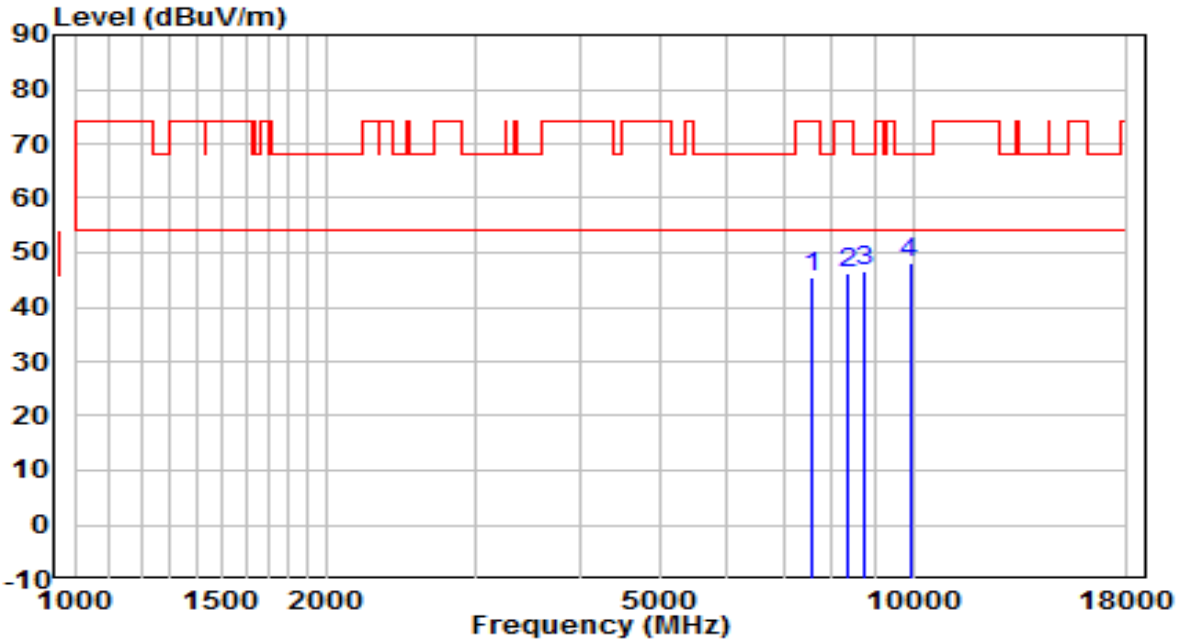


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7596.000	33.78	11.87	45.65	-28.35	74.00	Peak
2		8344.000	33.92	12.48	46.40	-27.60	74.00	Peak
3		8752.000	33.71	13.07	46.78	-21.42	68.20	Peak
4	*	9908.000	33.09	15.19	48.28	-19.92	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	110V/60Hz

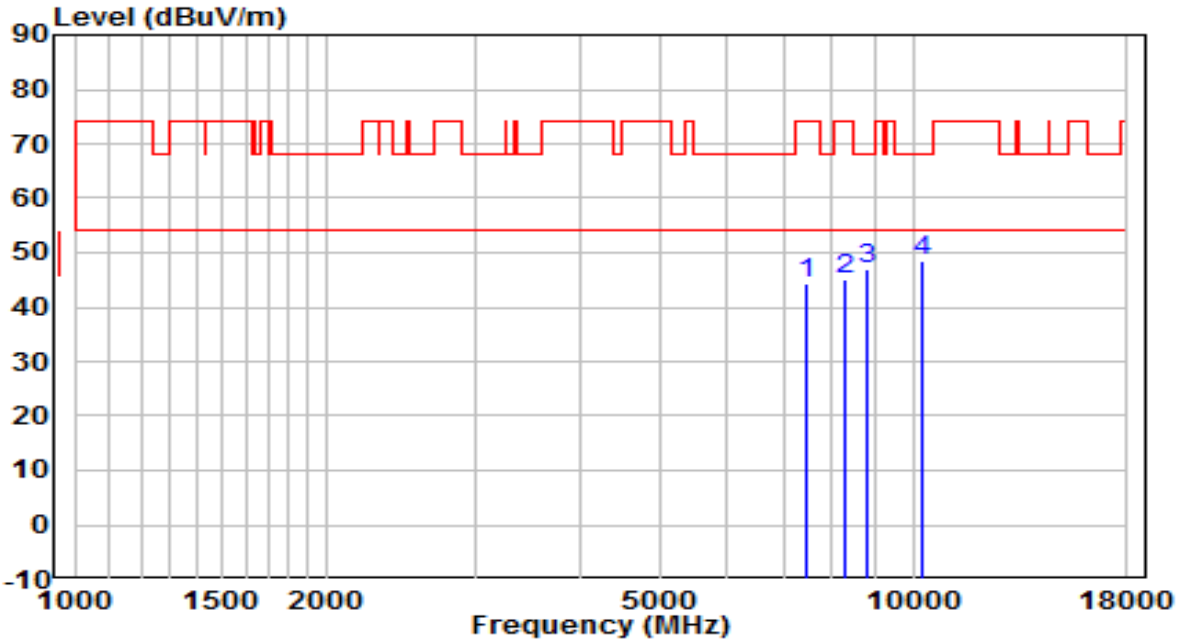


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7485.500	32.81	11.67	44.48	-29.52	74.00	Peak
2		8310.000	32.62	12.48	45.11	-28.89	74.00	Peak
3		8794.500	33.72	13.18	46.89	-21.31	68.20	Peak
4	*	10239.500	32.16	16.18	48.34	-19.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	110V/60Hz

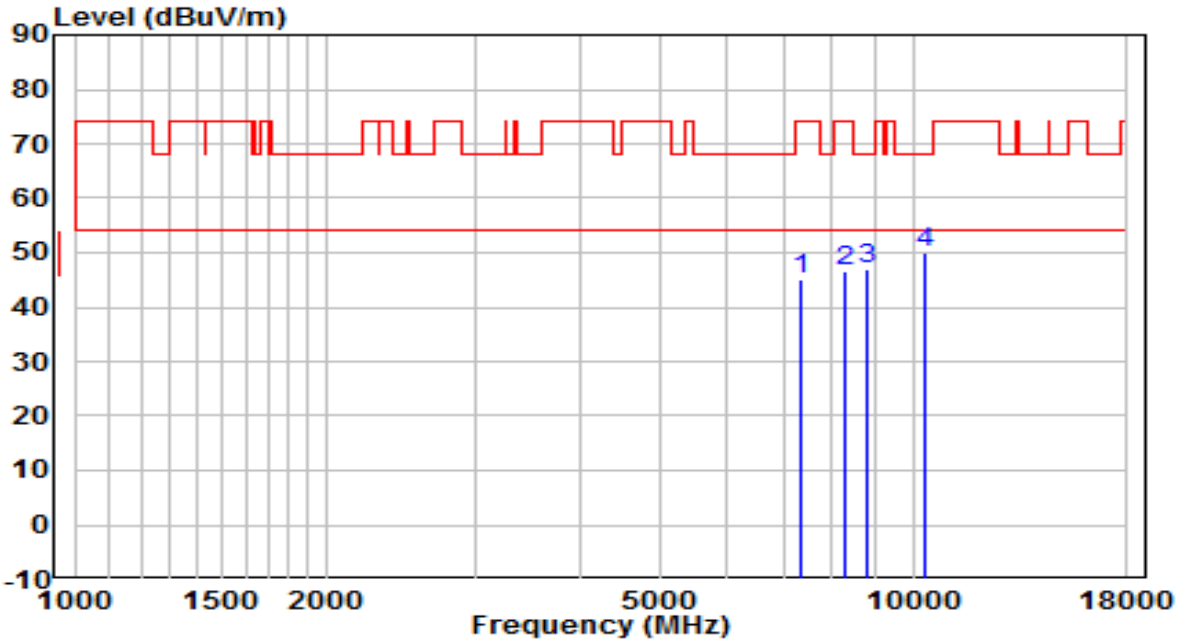


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7349.500	33.73	11.29	45.02	-28.98	74.00	Peak
2		8318.500	34.05	12.48	46.53	-27.47	74.00	Peak
3		8786.000	34.01	13.16	47.16	-21.04	68.20	Peak
4	*	10324.500	33.36	16.47	49.83	-18.37	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	110V/60Hz

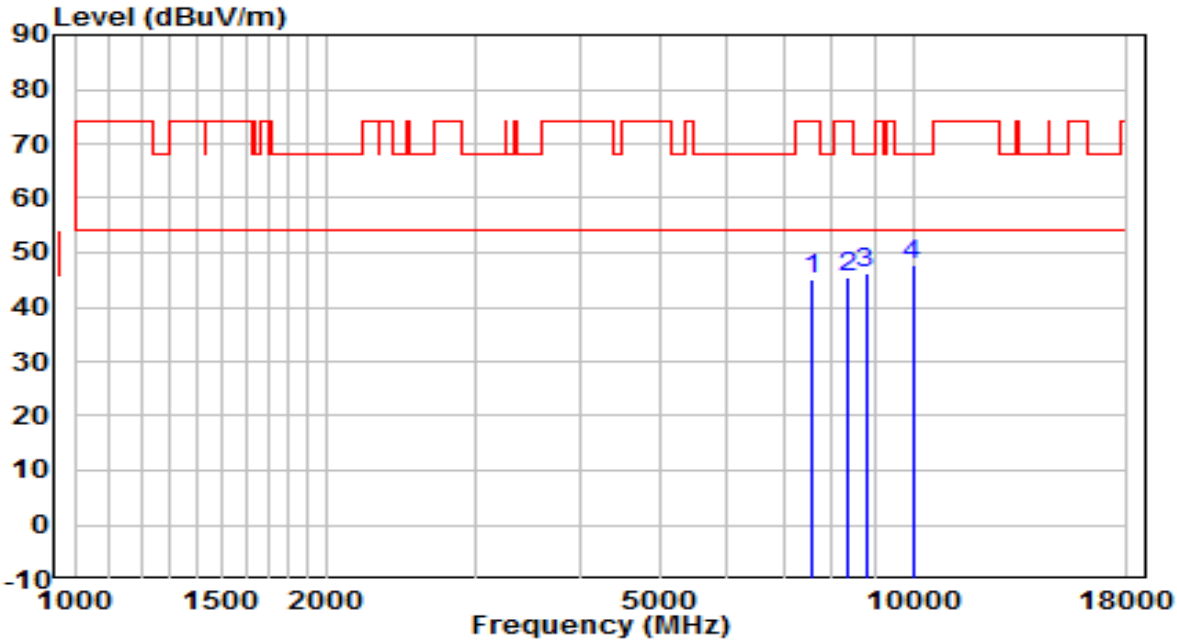


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7562.000	33.30	11.82	45.11	-28.89	74.00	Peak
2		8352.500	33.08	12.48	45.56	-28.44	74.00	Peak
3		8777.500	33.08	13.13	46.21	-21.99	68.20	Peak
4	*	9984.500	32.40	15.33	47.73	-20.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz	Test Voltage	110V/60Hz

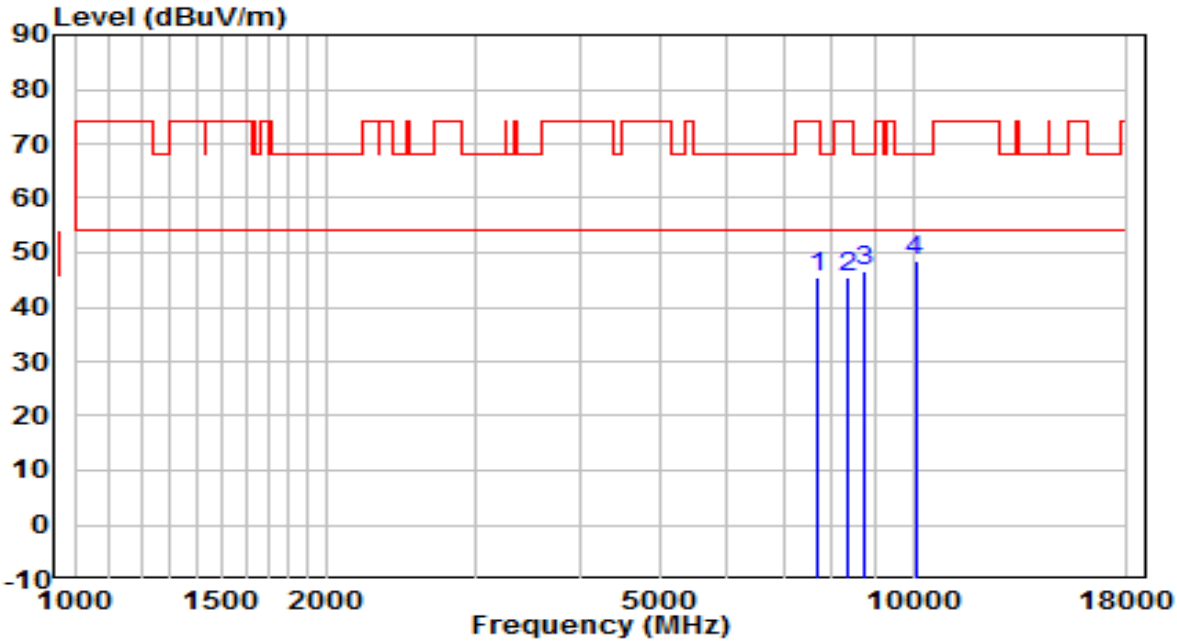


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7689.500	33.55	12.02	45.58	-28.42	74.00	Peak
2		8386.500	32.91	12.47	45.38	-28.62	74.00	Peak
3		8735.000	33.44	13.03	46.47	-21.73	68.20	Peak
4	*	10061.000	32.77	15.57	48.34	-19.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz	Test Voltage	110V/60Hz

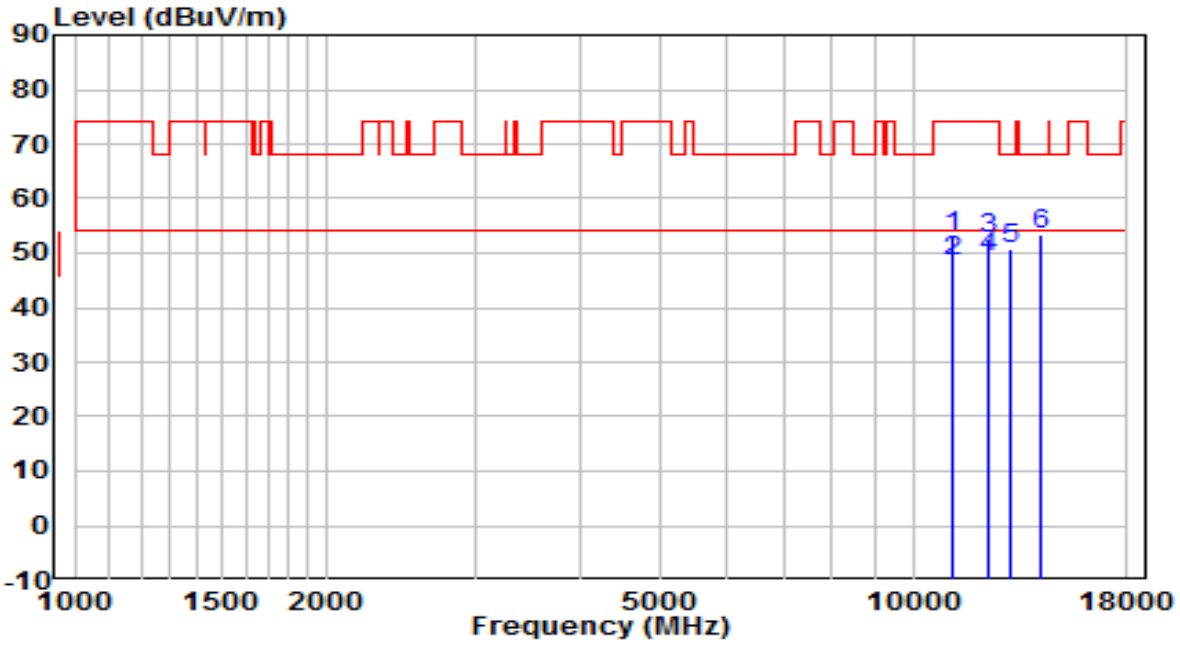


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		11106.500	35.22	17.92	53.14	-20.86	74.00	Peak
2		11106.500	30.53	17.92	48.45	-5.55	54.00	Average
3		12288.000	34.93	17.87	52.79	-21.21	74.00	Peak
4	*	12288.000	31.22	17.87	49.09	-4.91	54.00	Average
5		13078.500	31.39	19.49	50.88	-17.32	68.20	Peak
6		14217.500	32.04	21.45	53.49	-14.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	110V/60Hz

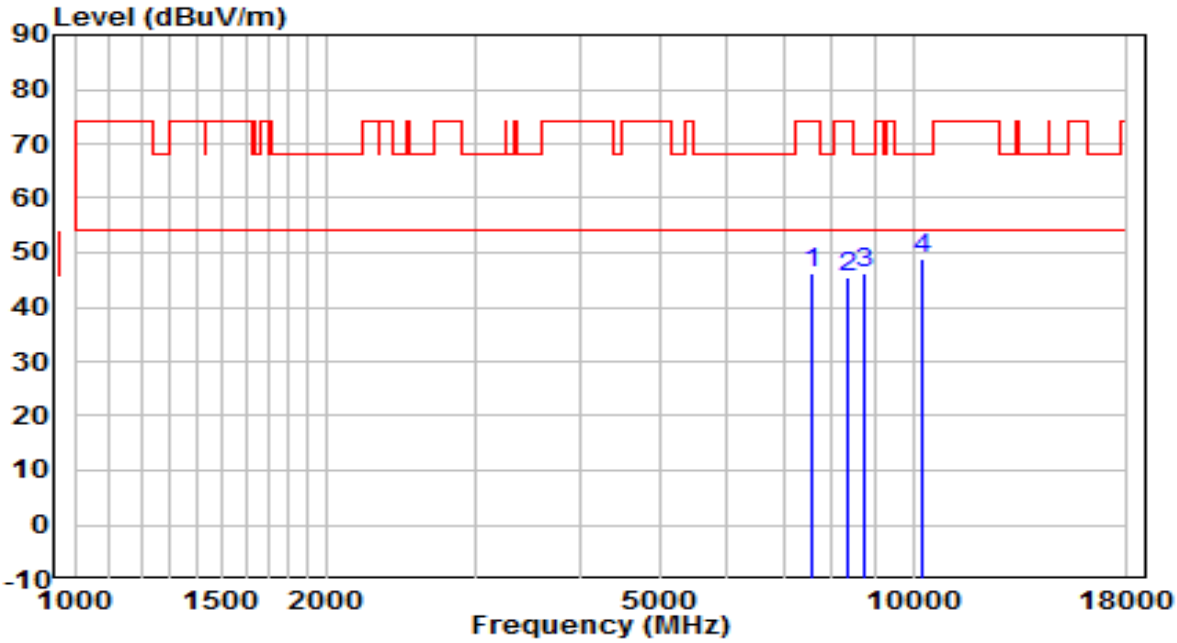


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7562.000	34.58	11.82	46.40	-27.60	74.00	Peak
2		8352.500	32.92	12.48	45.40	-28.60	74.00	Peak
3		8760.500	33.23	13.09	46.33	-21.87	68.20	Peak
4	*	10265.000	32.67	16.27	48.94	-19.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	110V/60Hz

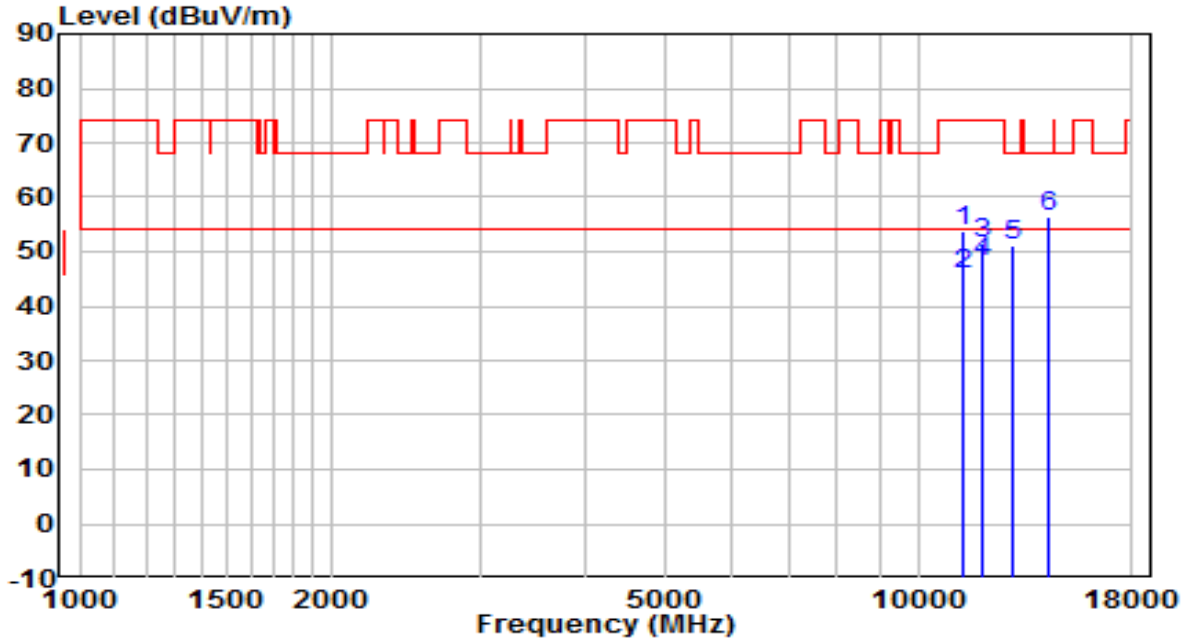


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		11336.000	35.68	18.23	53.91	-20.09	74.00	Peak
2		11336.000	27.45	18.23	45.69	-8.31	54.00	Average
3		11939.500	33.61	17.90	51.51	-22.49	74.00	Peak
4	*	11939.500	30.16	17.90	48.06	-5.94	54.00	Average
5		12993.500	31.95	19.27	51.22	-16.98	68.20	Peak
6		14353.500	35.18	21.40	56.58	-11.62	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz	Test Voltage	110V/60Hz

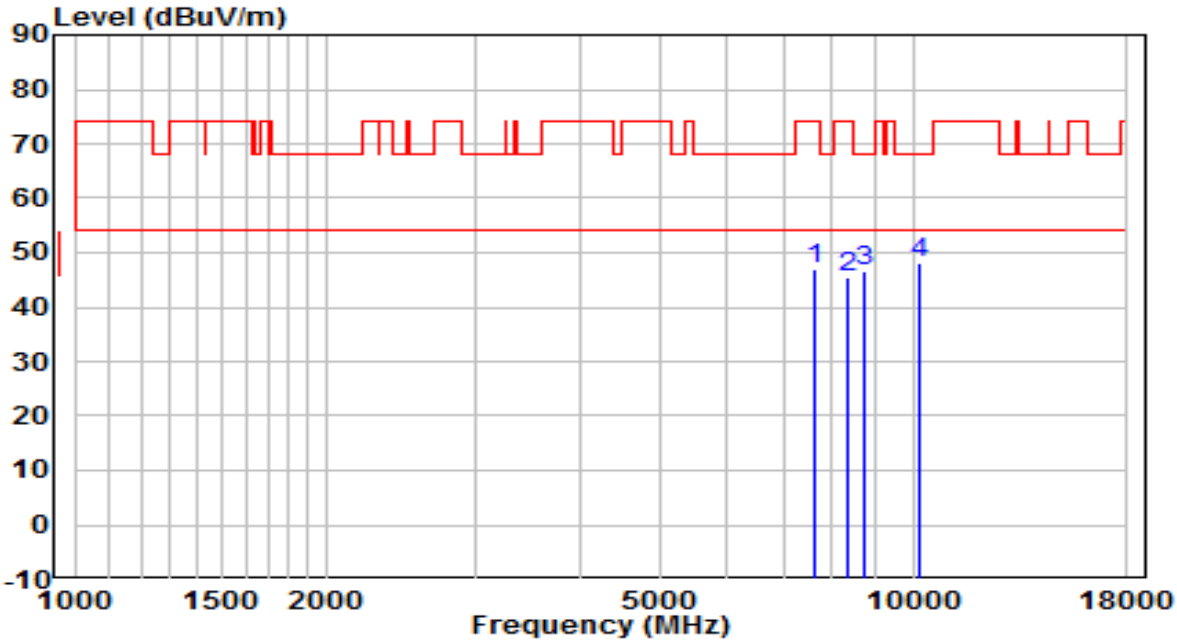


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7613.000	35.08	11.90	46.98	-27.02	74.00	Peak
2		8327.000	33.11	12.48	45.59	-28.41	74.00	Peak
3		8743.500	33.47	13.05	46.52	-21.68	68.20	Peak
4	*	10205.500	32.23	16.06	48.29	-19.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz	Test Voltage	110V/60Hz

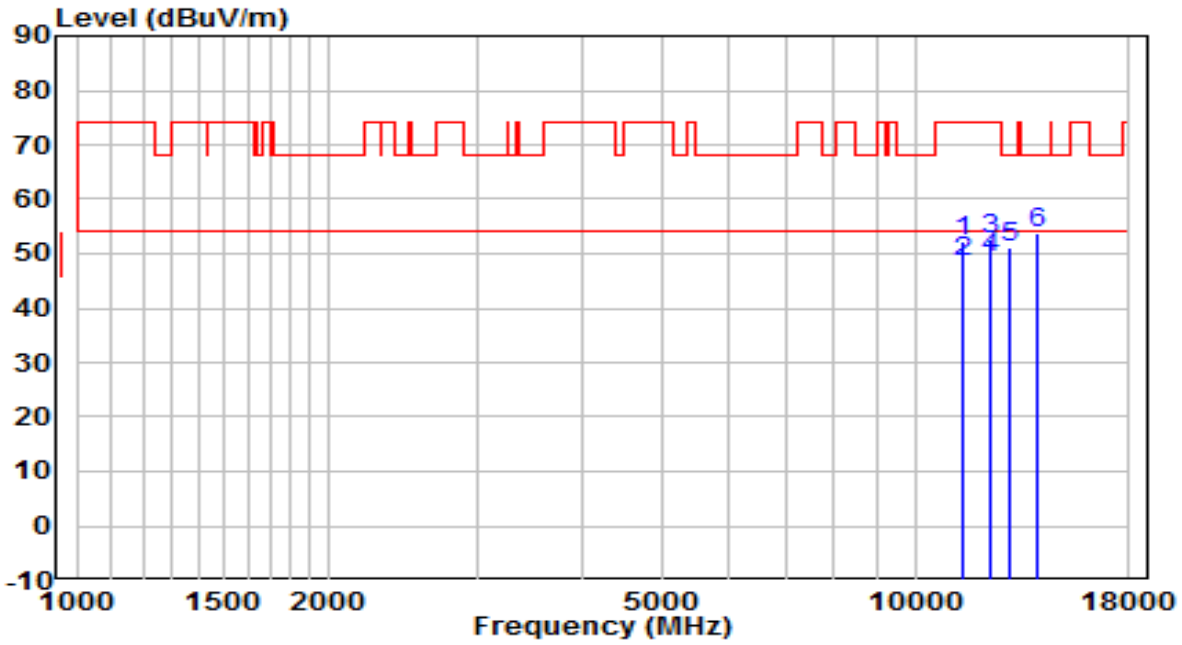


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		11421.000	33.74	18.34	52.08	-21.92	74.00	Peak
2		11421.000	30.16	18.34	48.50	-5.50	54.00	Average
3		12262.500	34.63	17.86	52.49	-21.51	74.00	Peak
4	*	12262.500	31.51	17.86	49.37	-4.63	54.00	Average
5		12951.000	32.00	19.15	51.15	-17.05	68.20	Peak
6		13979.500	32.23	21.48	53.71	-14.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	110V/60Hz

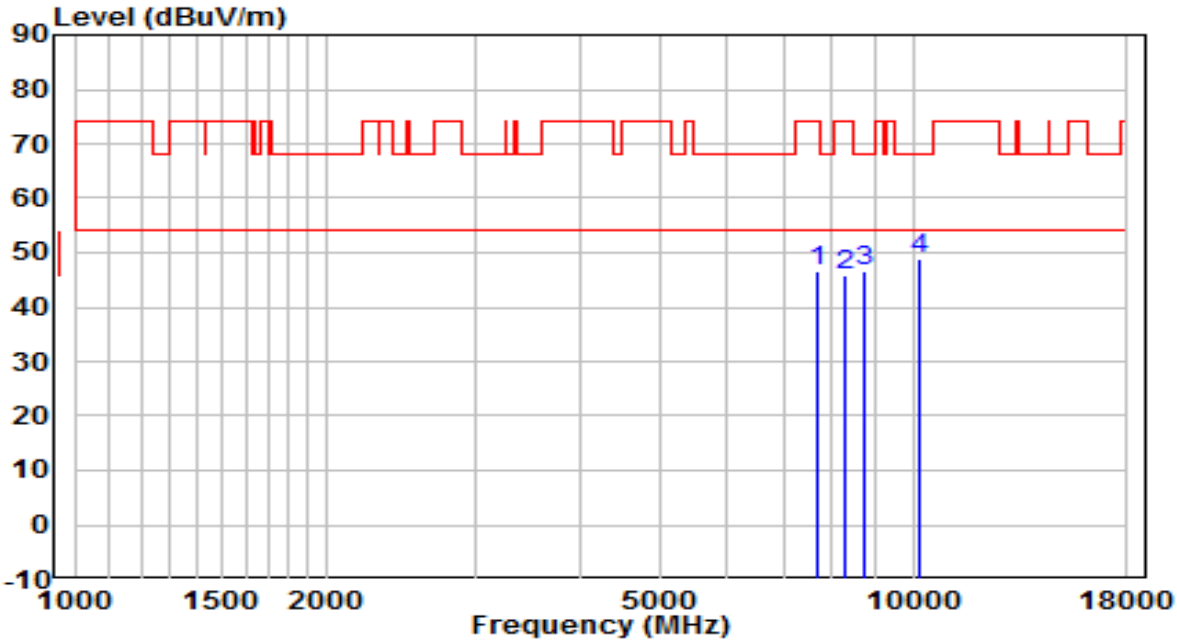


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7672.500	34.78	12.00	46.78	-27.22	74.00	Peak
2		8284.500	33.19	12.49	45.68	-28.32	74.00	Peak
3		8769.000	33.60	13.11	46.72	-21.48	68.20	Peak
4	*	10188.500	32.72	16.00	48.72	-19.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	110V/60Hz

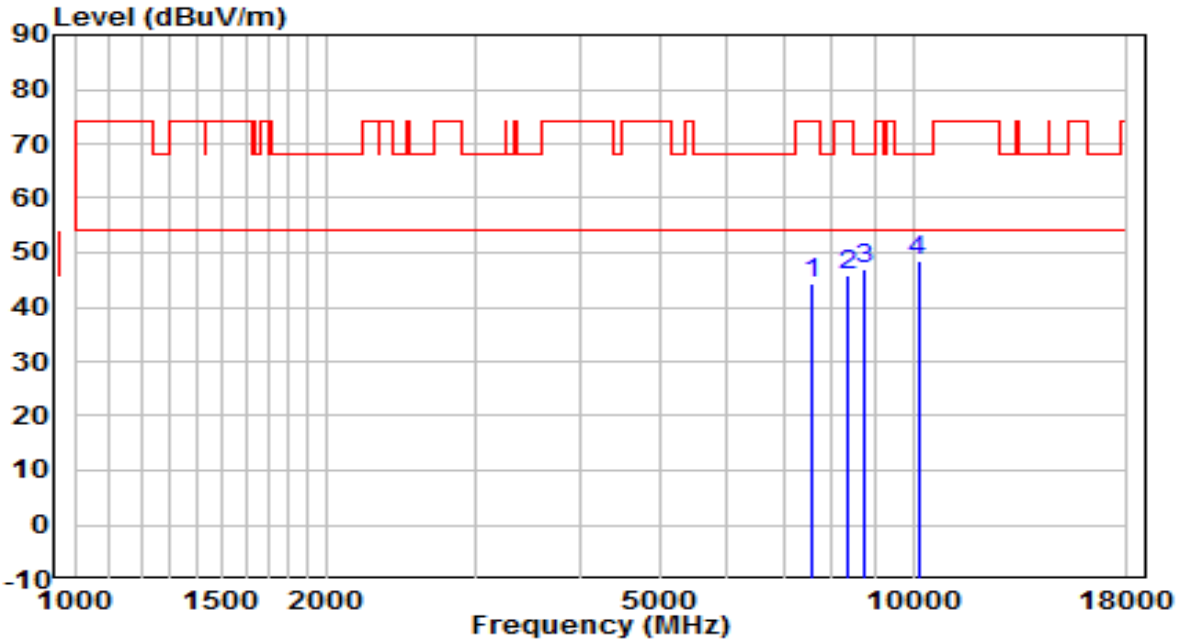


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7553.500	32.62	11.80	44.42	-29.58	74.00	Peak
2		8327.000	33.20	12.48	45.68	-28.32	74.00	Peak
3		8760.500	33.78	13.09	46.87	-21.33	68.20	Peak
4	*	10137.500	32.49	15.83	48.32	-19.88	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	110V/60Hz

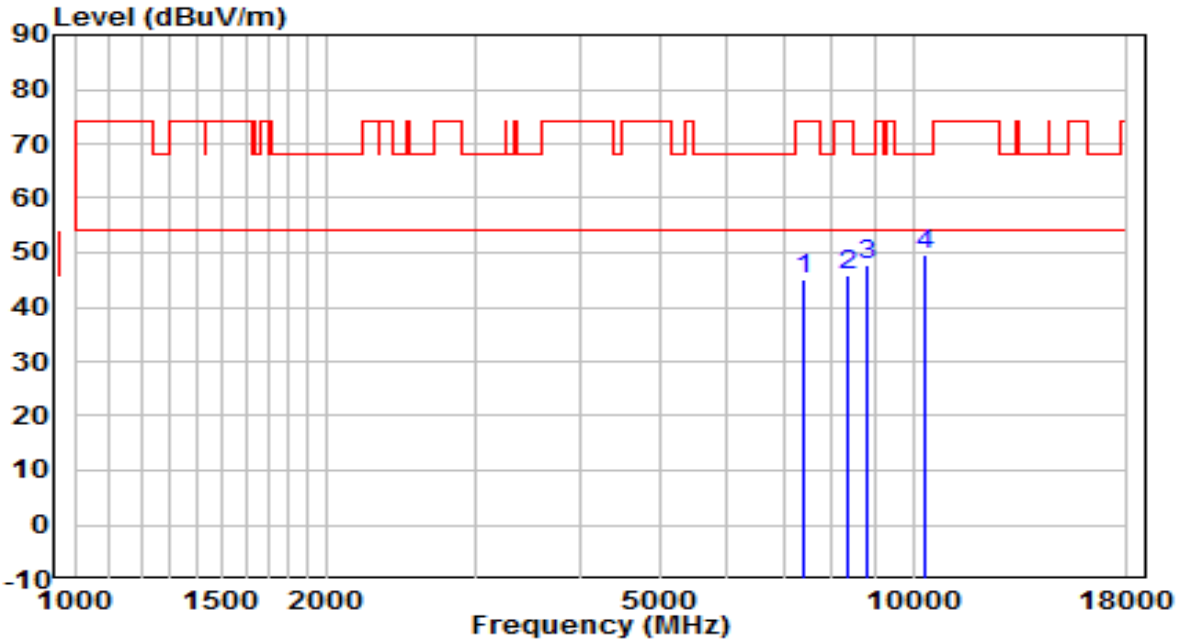


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7392.000	33.67	11.41	45.08	-28.92	74.00	Peak
2		8352.500	33.24	12.48	45.72	-28.28	74.00	Peak
3		8811.500	34.35	13.22	47.57	-20.63	68.20	Peak
4	*	10324.500	33.29	16.47	49.76	-18.44	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	110V/60Hz

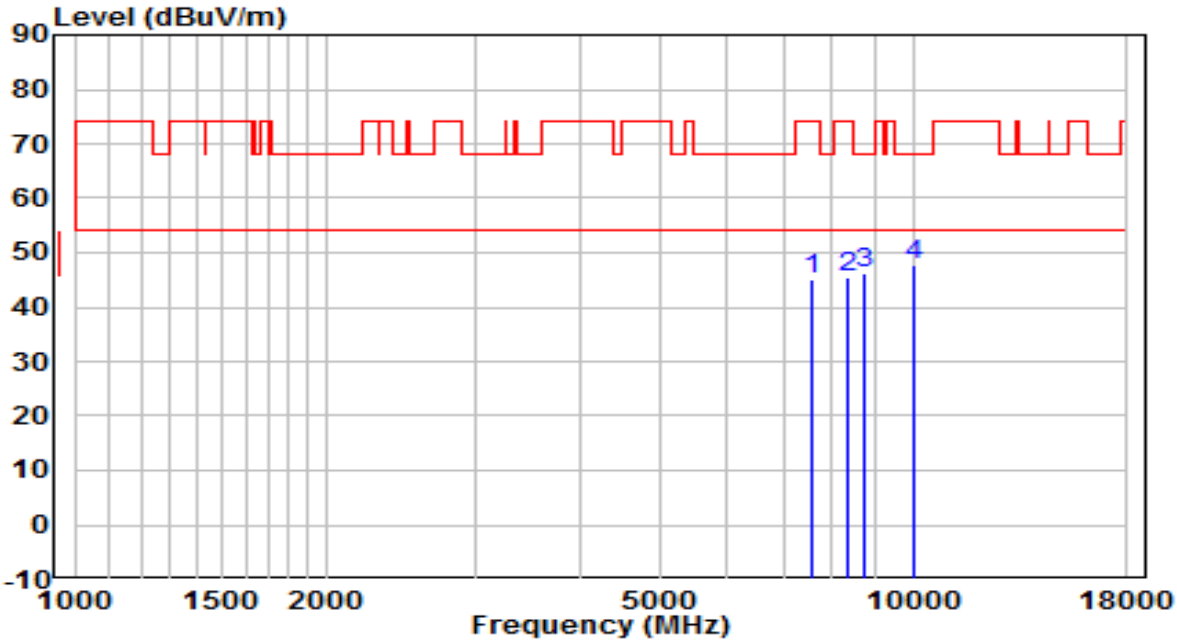


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7596.000	33.34	11.87	45.21	-28.79	74.00	Peak
2		8369.500	32.98	12.47	45.45	-28.55	74.00	Peak
3		8769.000	33.08	13.11	46.20	-22.00	68.20	Peak
4	*	10010.000	32.18	15.39	47.57	-20.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	110V/60Hz

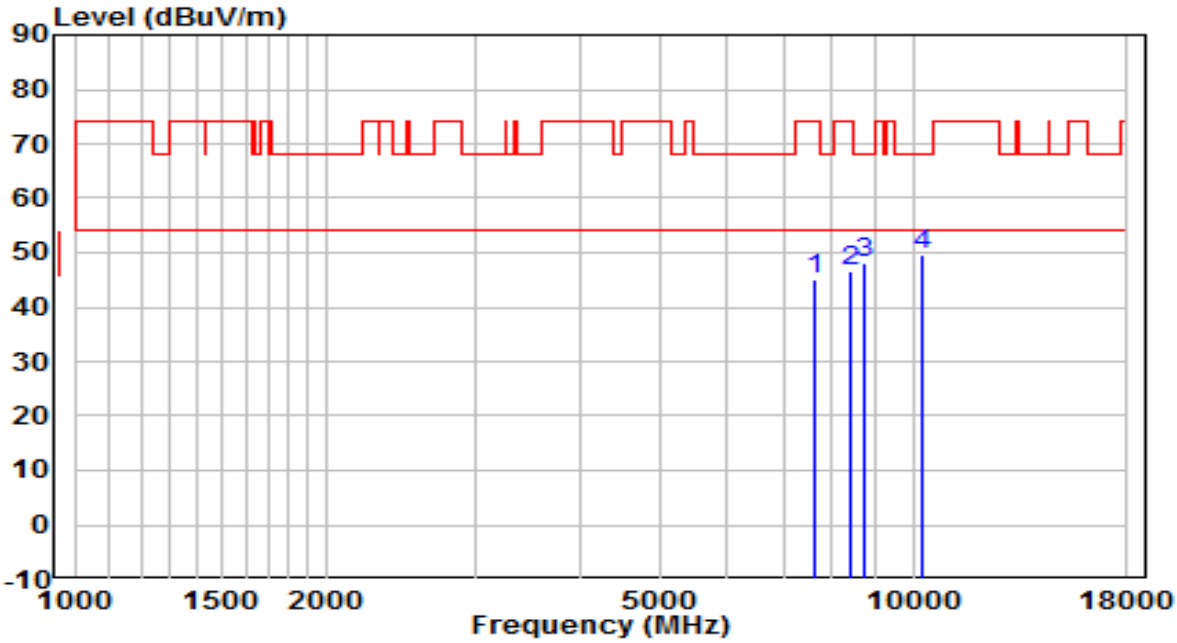


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7613.000	33.28	11.90	45.18	-28.82	74.00	Peak
2		8420.500	34.18	12.47	46.64	-27.36	74.00	Peak
3		8752.000	35.05	13.07	48.12	-20.08	68.20	Peak
4	*	10282.000	33.48	16.32	49.81	-18.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	110V/60Hz

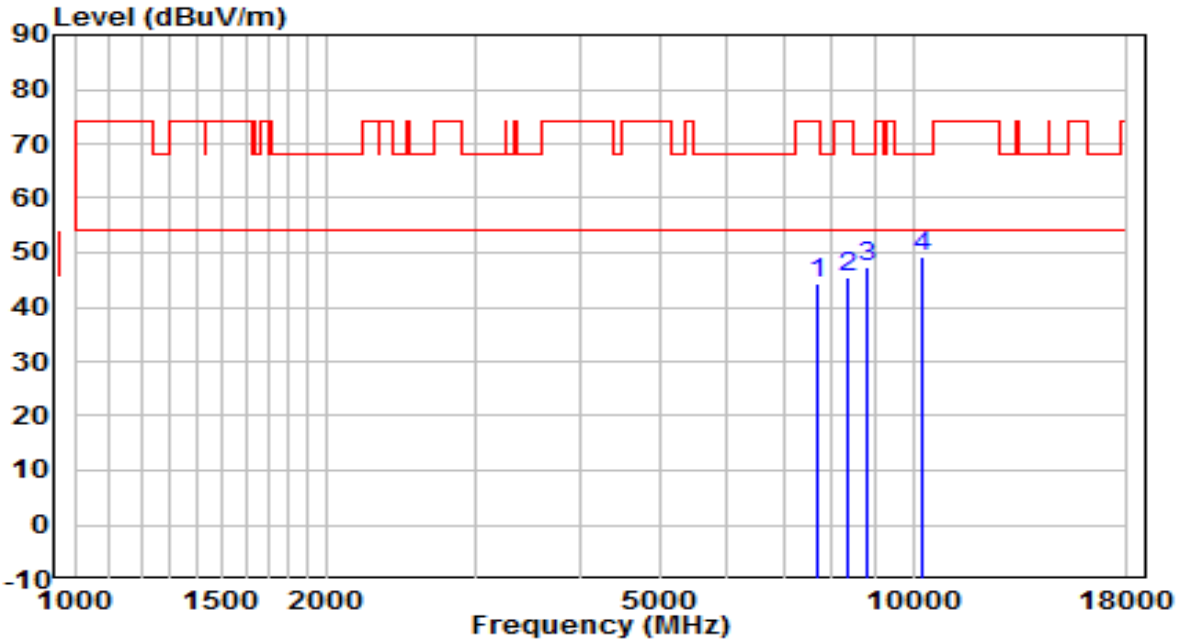


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7672.500	32.40	12.00	44.39	-29.61	74.00	Peak
2		8378.000	32.90	12.47	45.37	-28.63	74.00	Peak
3		8786.000	34.02	13.16	47.18	-21.02	68.20	Peak
4	*	10273.500	33.12	16.30	49.42	-18.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	110V/60Hz

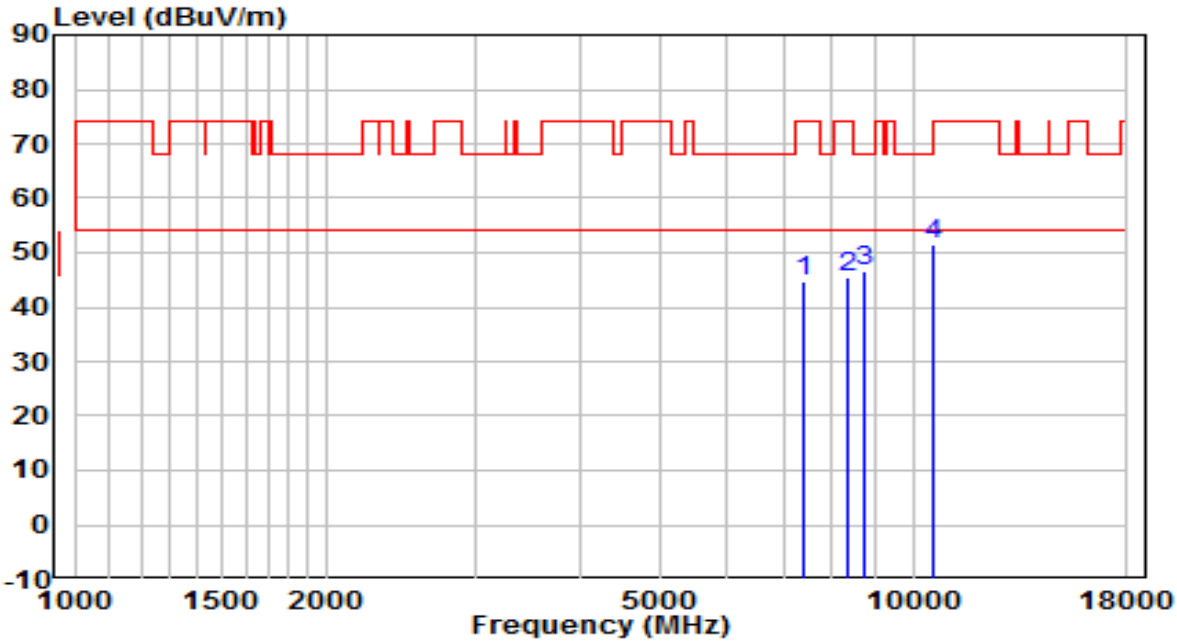


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7392.000	33.45	11.41	44.86	-29.14	74.00	Peak
2		8344.000	32.92	12.48	45.39	-28.61	74.00	Peak
3		8769.000	33.45	13.11	46.56	-21.64	68.20	Peak
4	*	10579.500	34.33	17.18	51.52	-16.68	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	110V/60Hz

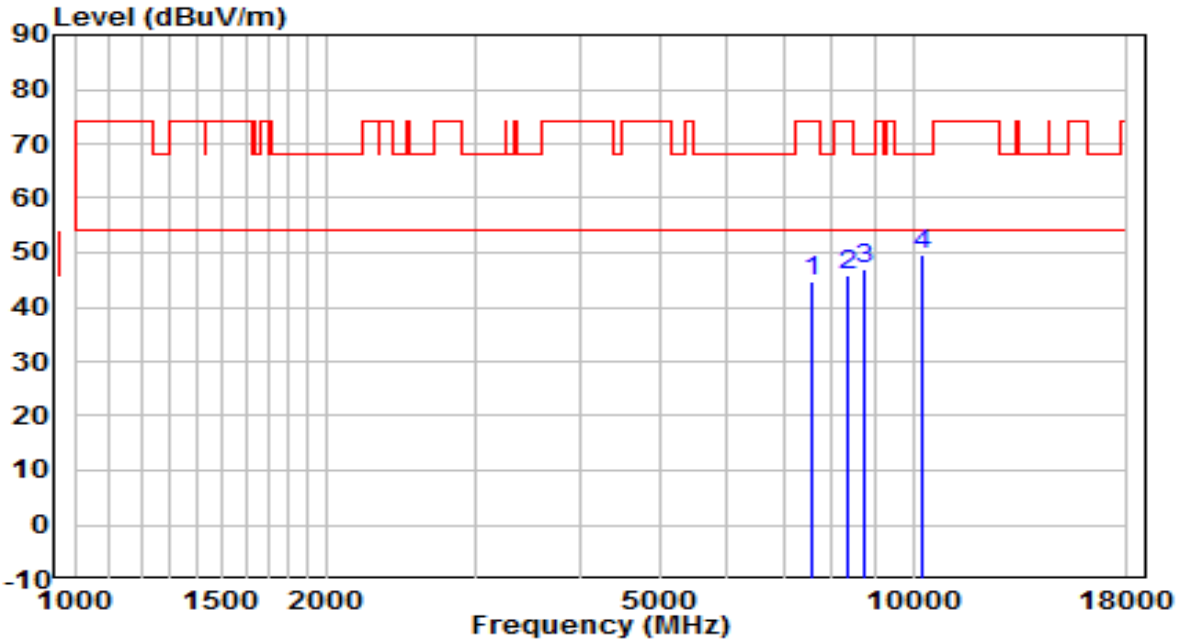


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7596.000	32.73	11.87	44.60	-29.40	74.00	Peak
2		8344.000	33.39	12.48	45.87	-28.13	74.00	Peak
3		8760.500	33.99	13.09	47.08	-21.12	68.20	Peak
4	*	10265.000	33.43	16.27	49.70	-18.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	110V/60Hz

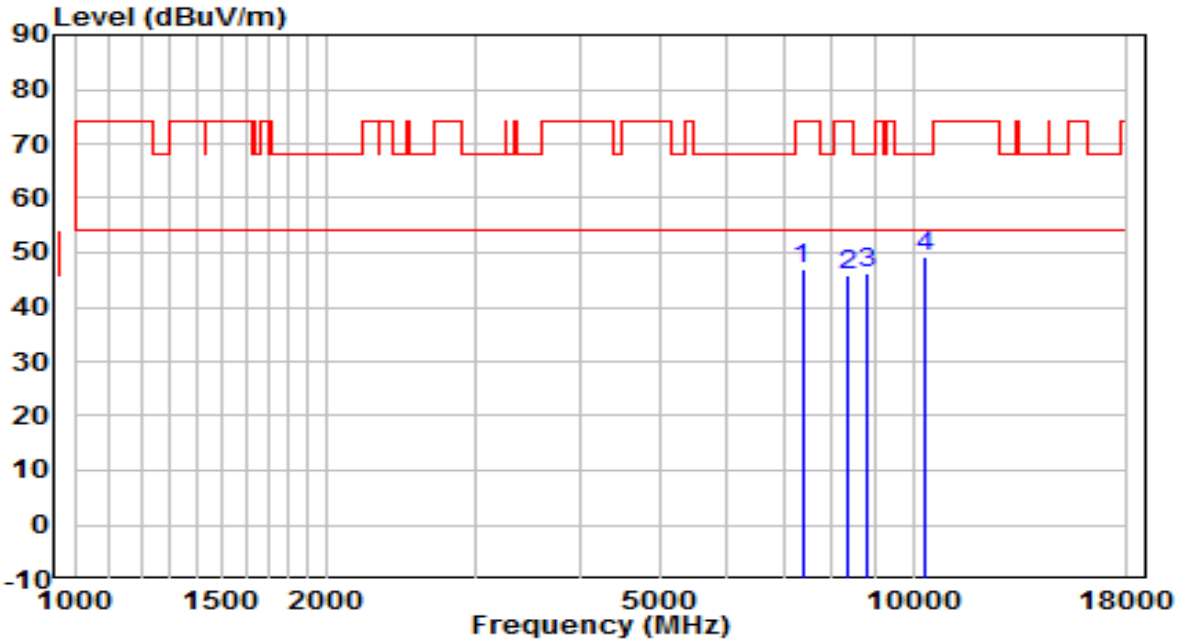


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7375.000	35.74	11.36	47.11	-26.89	74.00	Peak
2		8327.000	33.36	12.48	45.85	-28.15	74.00	Peak
3		8828.500	33.08	13.26	46.34	-21.86	68.20	Peak
4	*	10350.000	32.59	16.56	49.15	-19.05	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	110V/60Hz

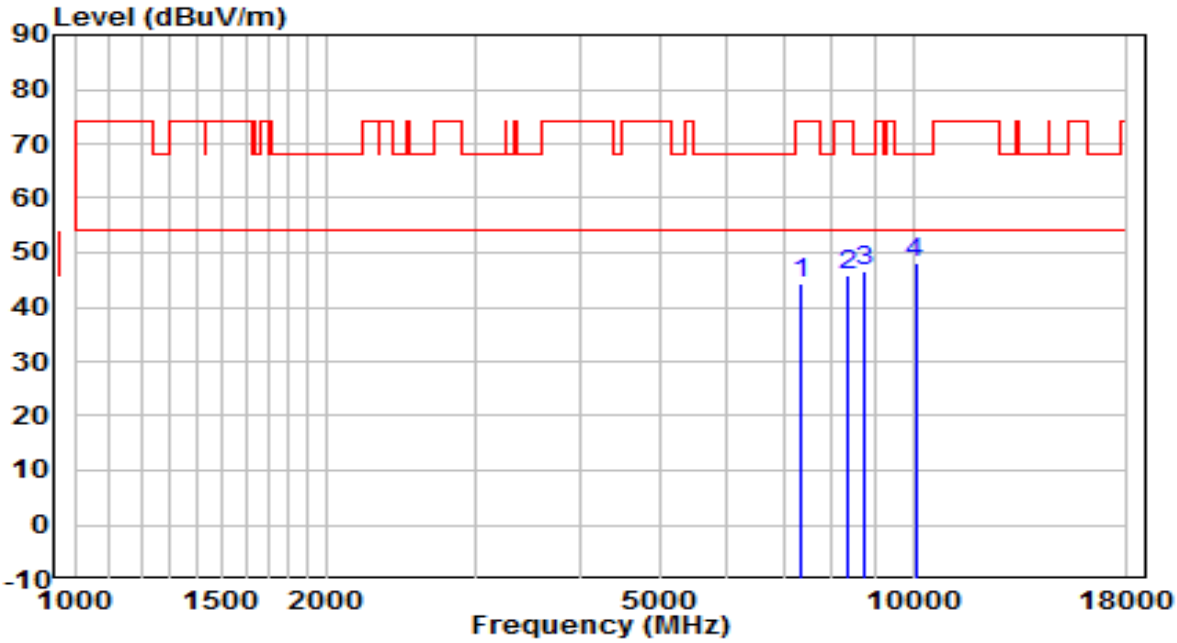


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7349.500	33.13	11.29	44.42	-29.58	74.00	Peak
2		8344.000	33.28	12.48	45.76	-28.24	74.00	Peak
3		8760.500	33.48	13.09	46.57	-21.63	68.20	Peak
4	*	10061.000	32.65	15.57	48.22	-19.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	110V/60Hz

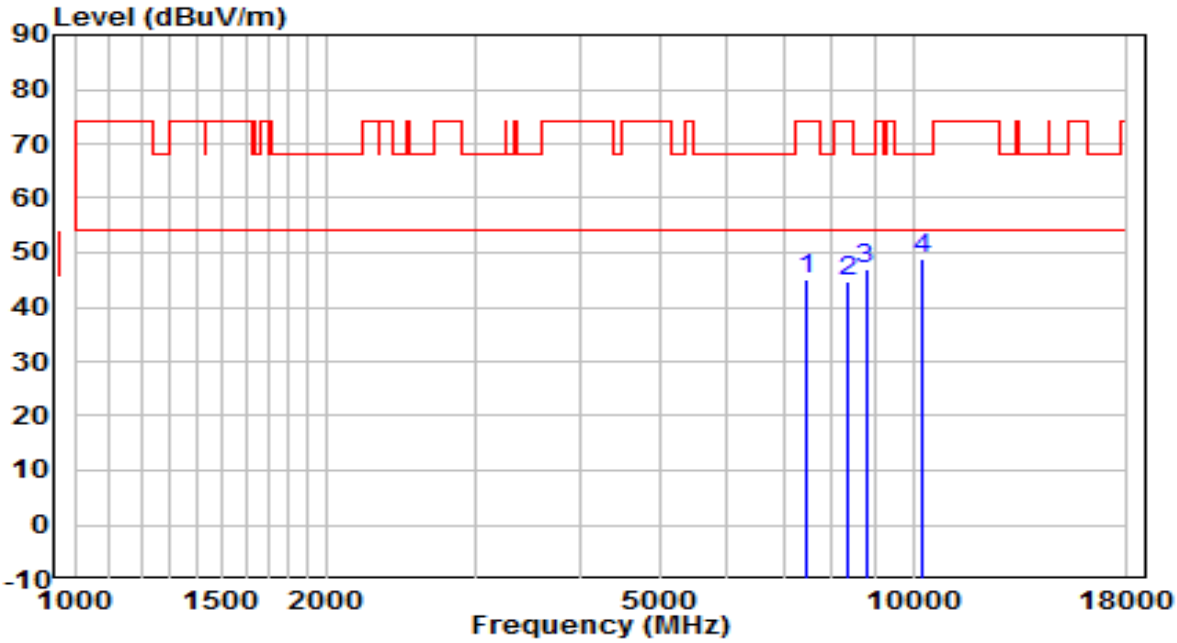


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7477.000	33.63	11.65	45.28	-28.72	74.00	Peak
2		8335.500	32.33	12.48	44.81	-29.19	74.00	Peak
3		8777.500	33.67	13.13	46.80	-21.40	68.20	Peak
4	*	10282.000	32.38	16.32	48.71	-19.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	110V/60Hz

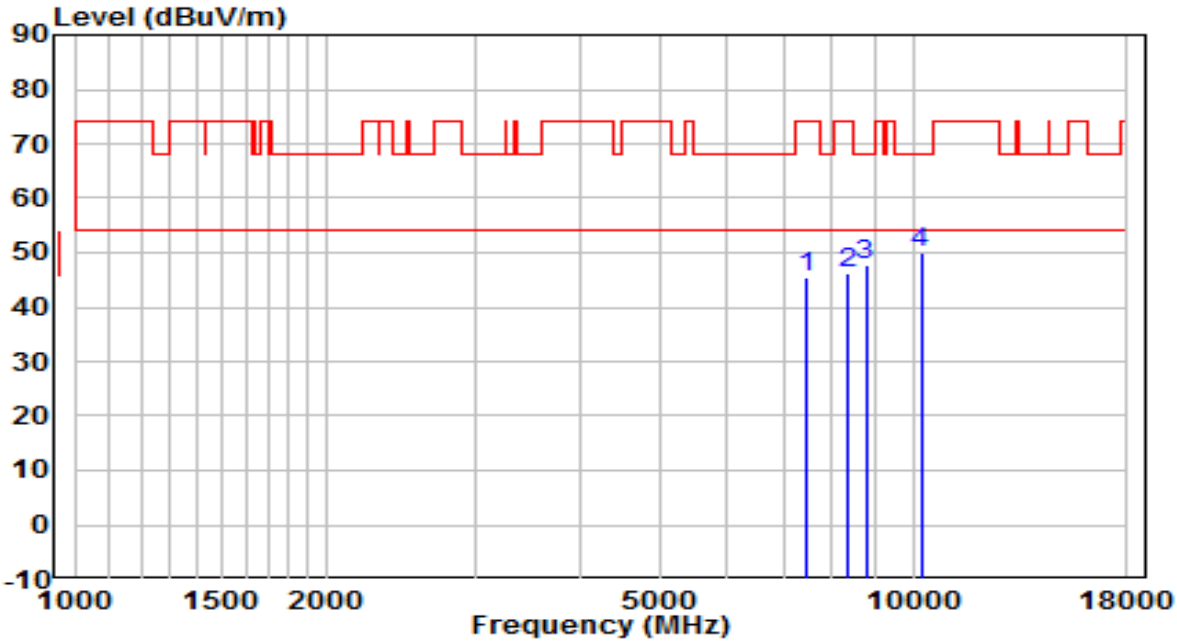


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7477.000	33.68	11.65	45.33	-28.67	74.00	Peak
2		8369.500	33.92	12.47	46.40	-27.60	74.00	Peak
3		8777.500	34.47	13.13	47.61	-20.59	68.20	Peak
4	*	10214.000	33.92	16.09	50.01	-18.19	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	110V/60Hz

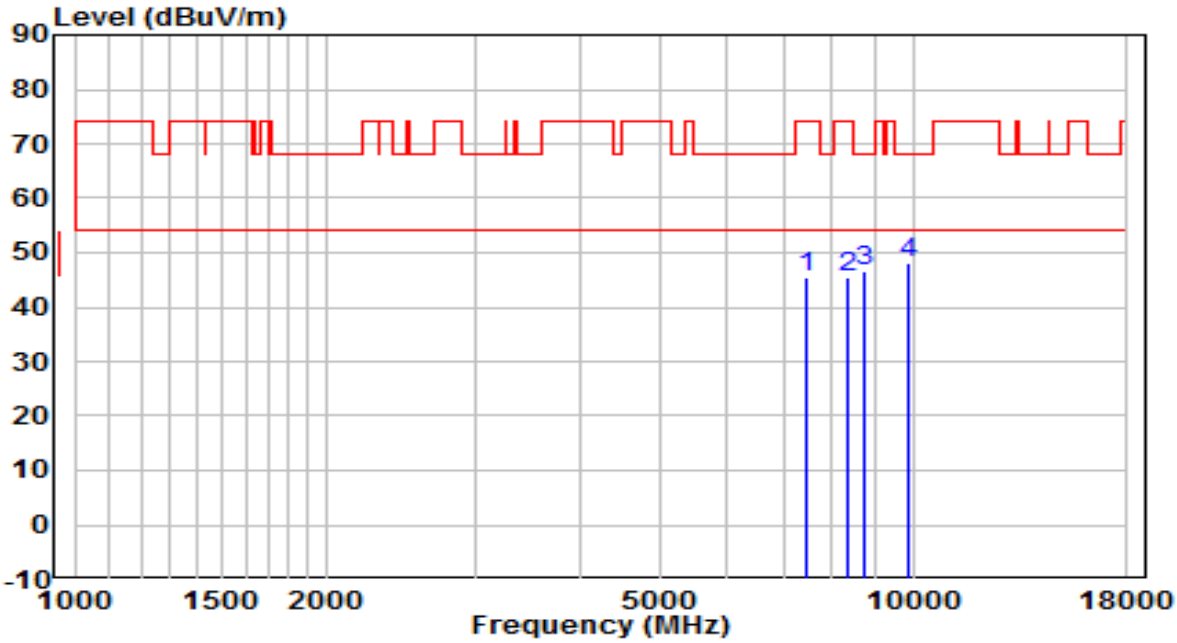


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7485.500	33.65	11.67	45.33	-28.67	74.00	Peak
2		8327.000	33.14	12.48	45.62	-28.38	74.00	Peak
3		8752.000	33.53	13.07	46.60	-21.60	68.20	Peak
4	*	9882.500	33.08	15.14	48.22	-19.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	110V/60Hz

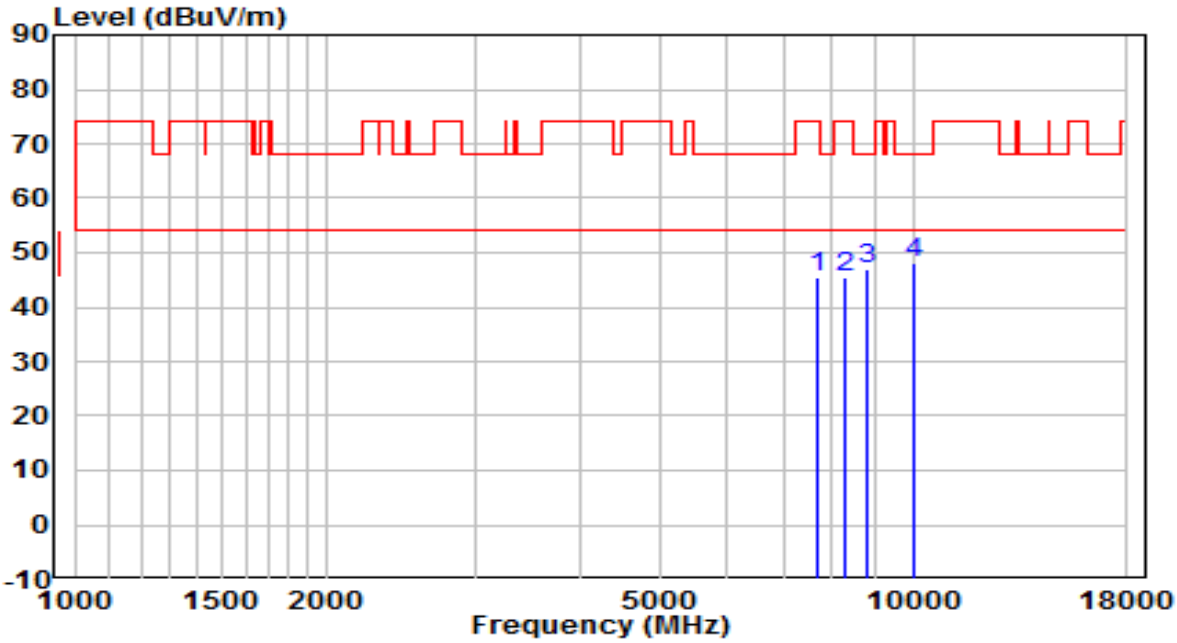


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7672.500	33.33	12.00	45.33	-28.67	74.00	Peak
2		8293.000	32.99	12.49	45.47	-28.53	74.00	Peak
3		8803.000	33.66	13.20	46.86	-21.34	68.20	Peak
4	*	10035.500	32.49	15.48	47.98	-20.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	110V/60Hz

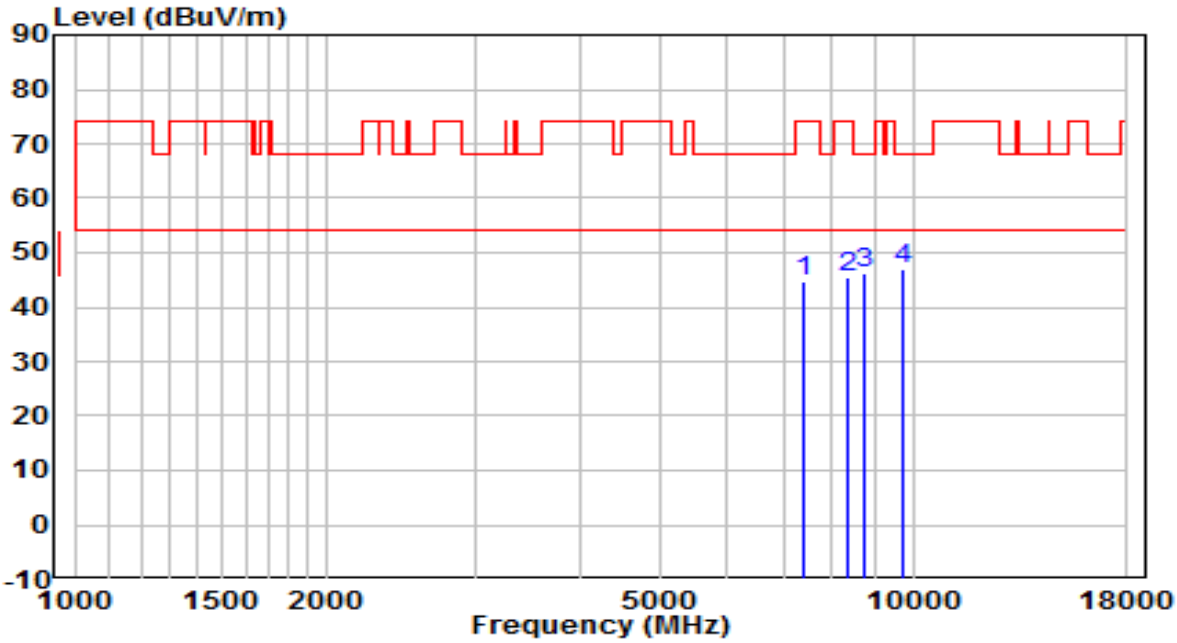


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7392.000	33.35	11.41	44.75	-29.25	74.00	Peak
2		8335.500	33.00	12.48	45.48	-28.52	74.00	Peak
3		8760.500	33.13	13.09	46.23	-21.97	68.20	Peak
4	*	9746.500	32.08	14.88	46.96	-21.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	110V/60Hz

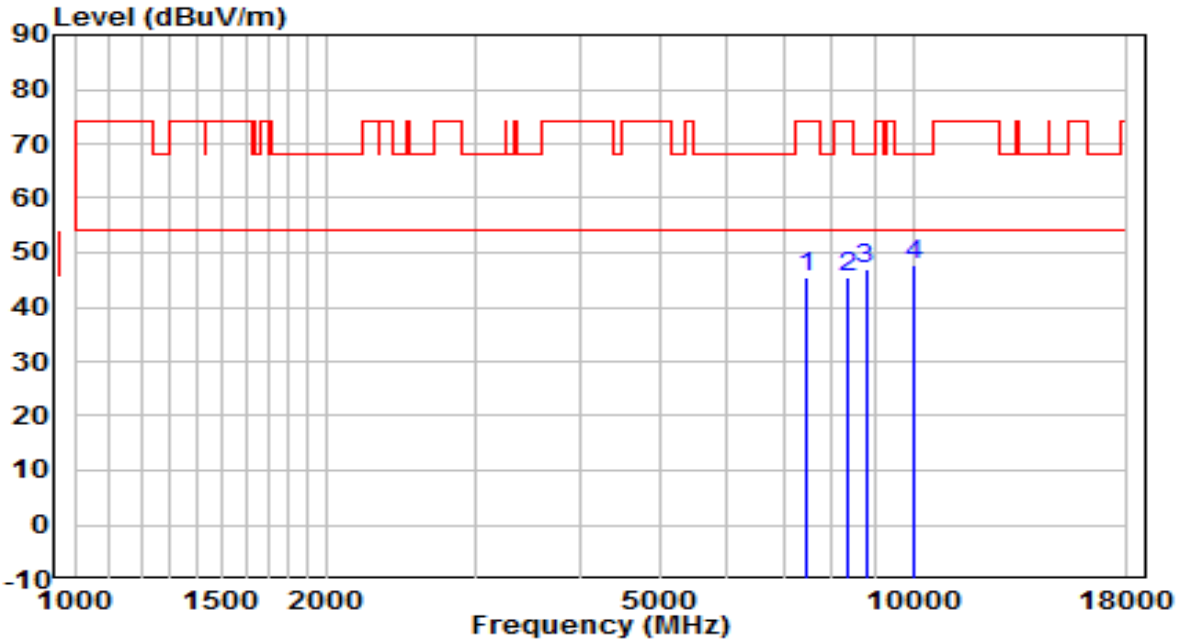


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7460.000	34.02	11.60	45.63	-28.37	74.00	Peak
2		8327.000	33.05	12.48	45.53	-28.47	74.00	Peak
3		8777.500	33.80	13.13	46.93	-21.27	68.20	Peak
4	*	10044.000	32.27	15.51	47.78	-20.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	110V/60Hz

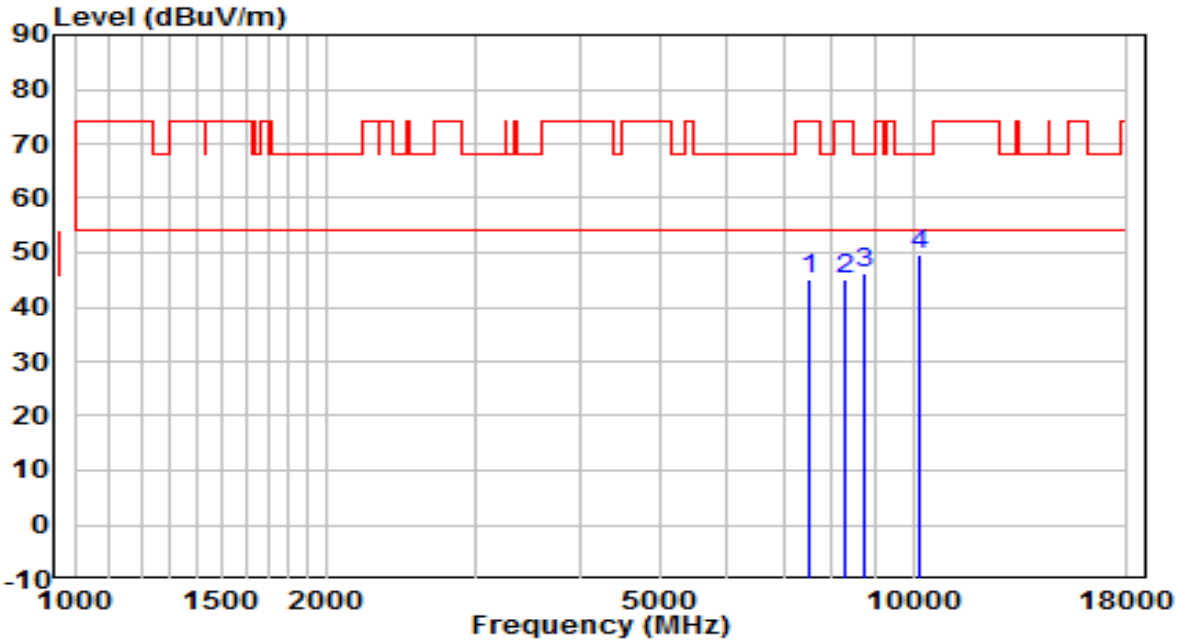


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7536.500	33.25	11.77	45.02	-28.98	74.00	Peak
2		8301.500	32.73	12.48	45.22	-28.78	74.00	Peak
3		8769.000	33.22	13.11	46.33	-21.87	68.20	Peak
4	*	10197.000	33.45	16.03	49.49	-18.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	110V/60Hz

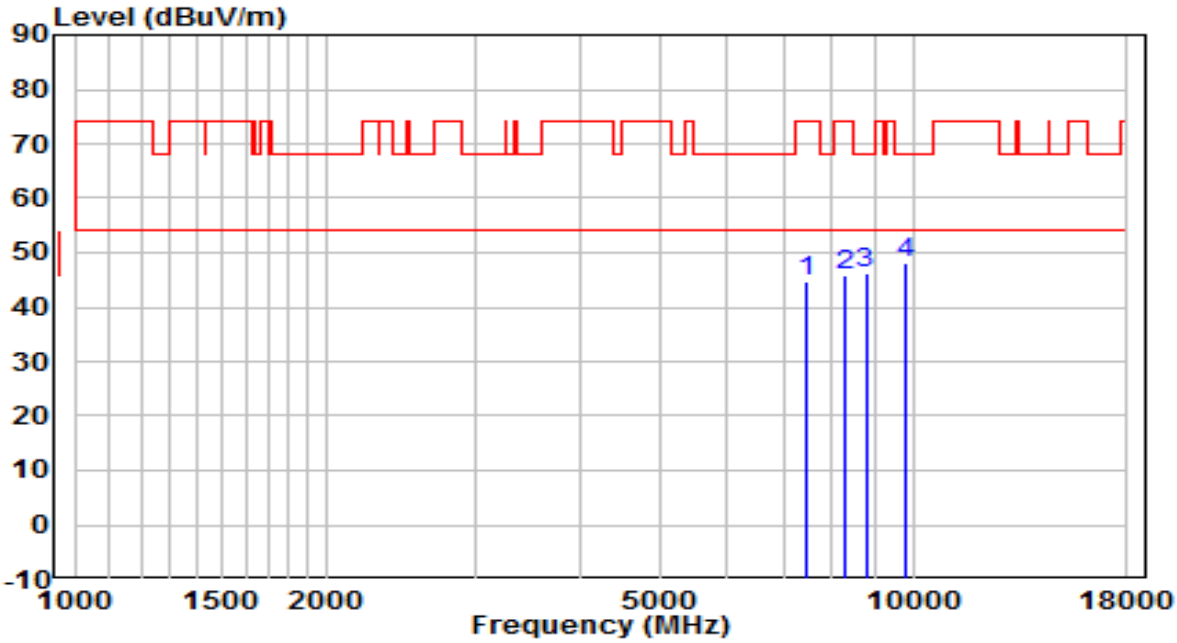


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7460.000	33.08	11.60	44.68	-29.32	74.00	Peak
2		8284.500	33.27	12.49	45.76	-28.24	74.00	Peak
3		8777.500	33.00	13.13	46.14	-22.06	68.20	Peak
4	*	9806.000	32.94	15.00	47.94	-20.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	110V/60Hz

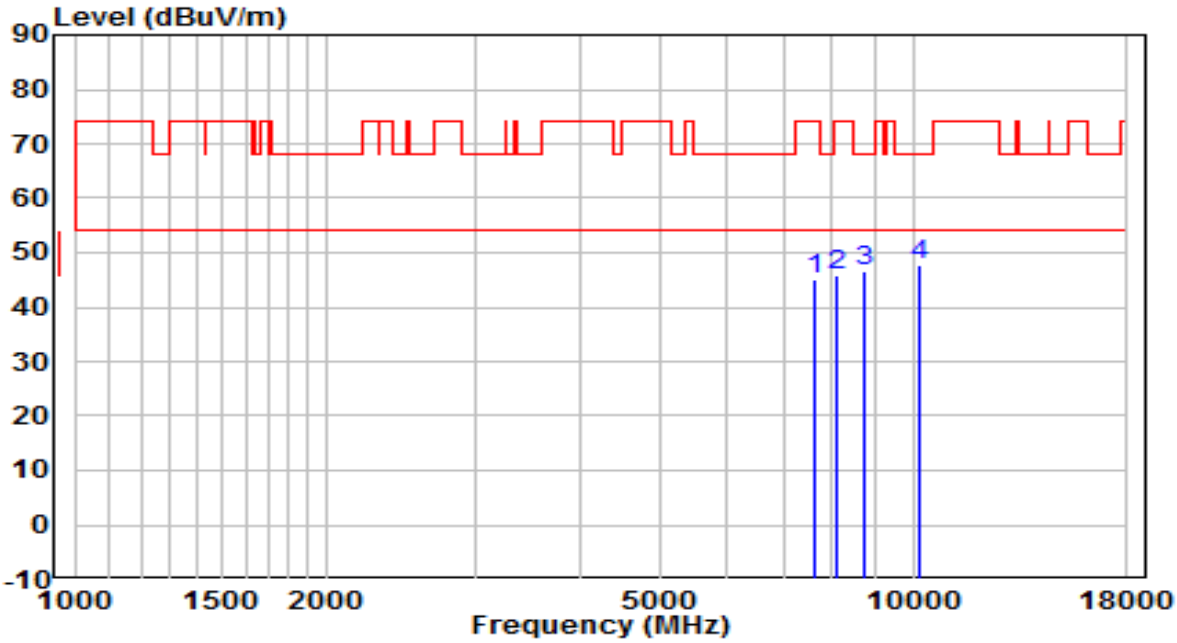


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7621.500	33.32	11.91	45.23	-28.77	74.00	Peak
2		8097.500	33.48	12.52	45.99	-28.01	74.00	Peak
3		8752.000	33.58	13.07	46.66	-21.54	68.20	Peak
4	*	10171.500	31.65	15.95	47.59	-20.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	110V/60Hz

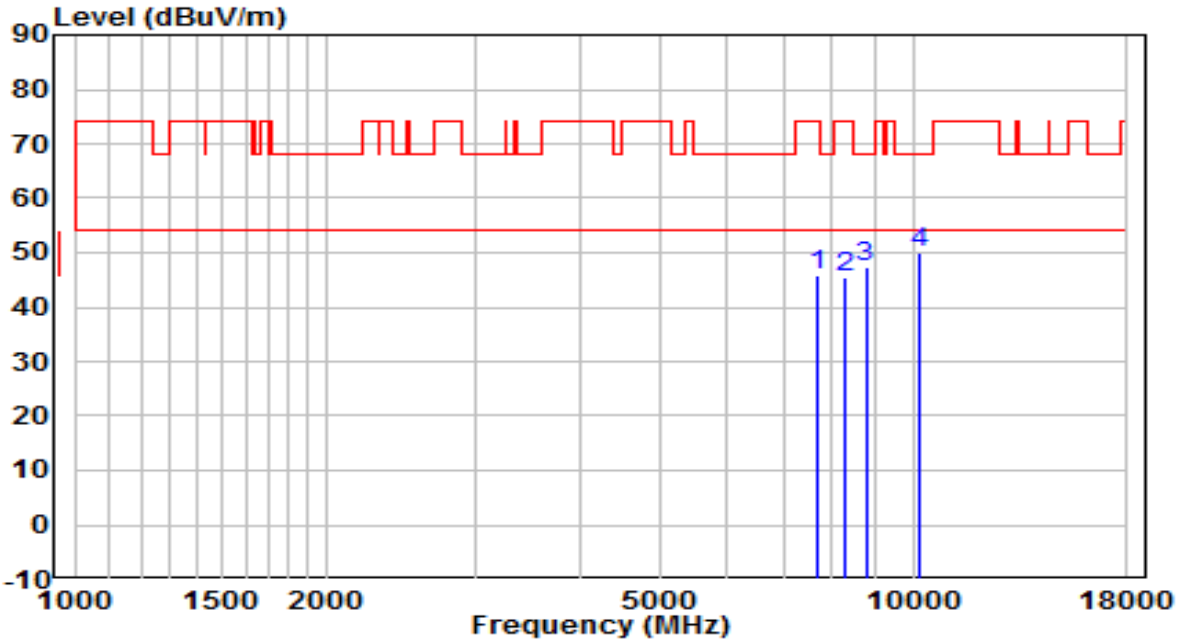


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7681.000	33.79	12.01	45.80	-28.20	74.00	Peak
2		8318.500	32.91	12.48	45.39	-28.61	74.00	Peak
3		8777.500	34.25	13.13	47.39	-20.81	68.20	Peak
4	*	10197.000	33.79	16.03	49.82	-18.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	110V/60Hz

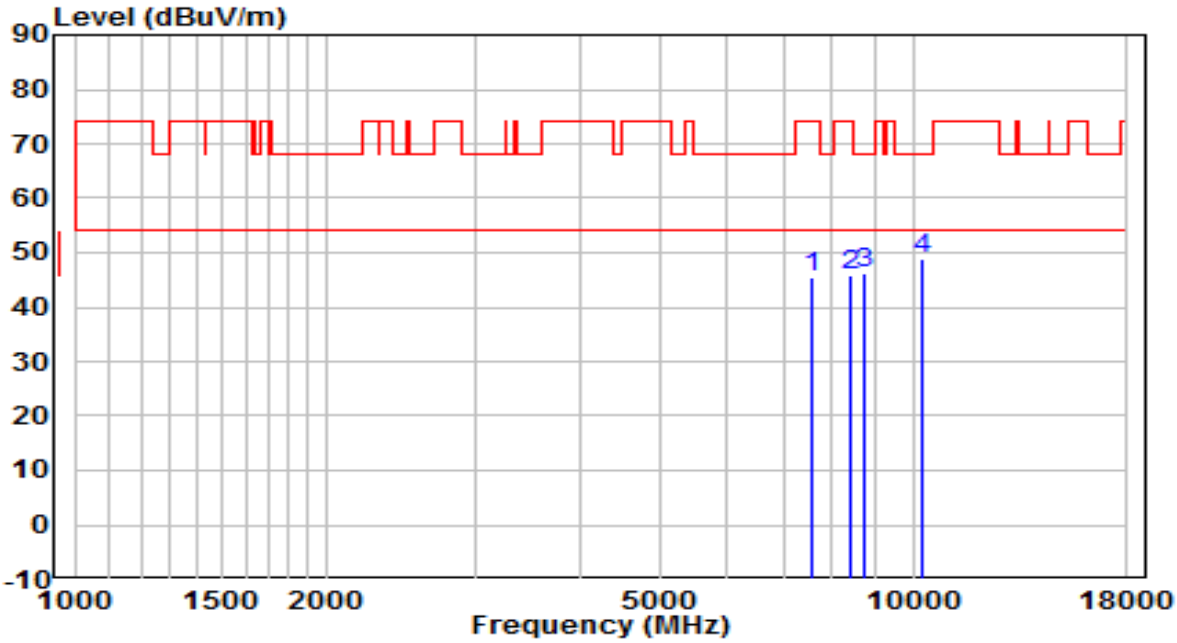


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7596.000	33.71	11.87	45.58	-28.42	74.00	Peak
2		8412.000	33.27	12.47	45.74	-28.26	74.00	Peak
3		8735.000	33.38	13.03	46.41	-21.79	68.20	Peak
4	*	10265.000	32.66	16.27	48.93	-19.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	110V/60Hz

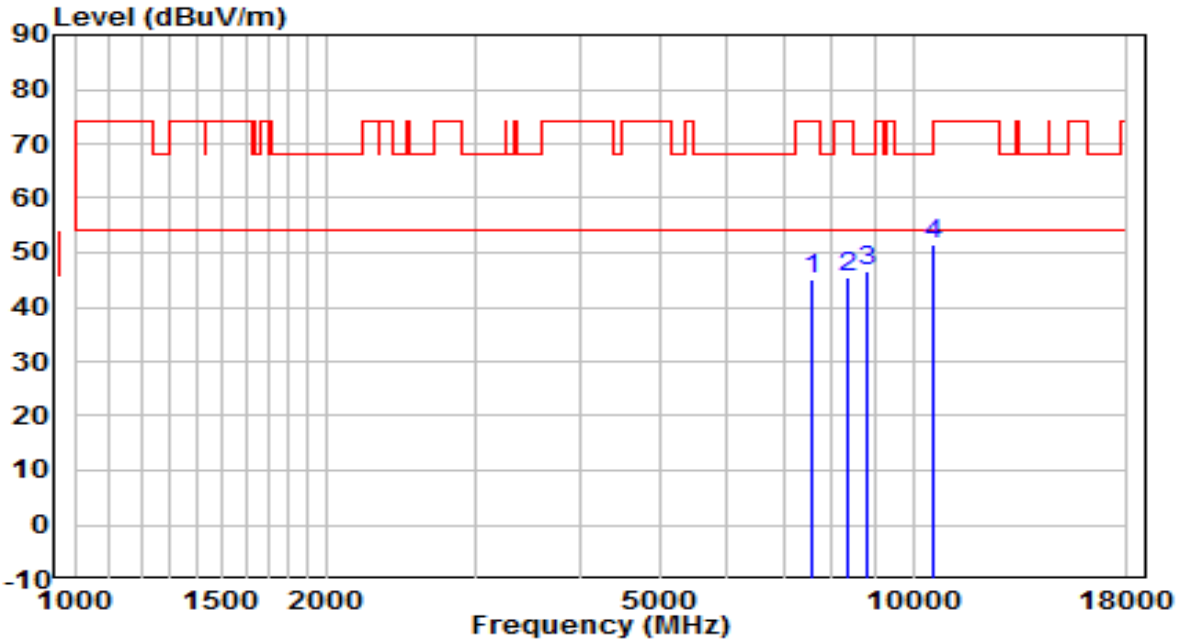


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7562.000	33.22	11.82	45.03	-28.97	74.00	Peak
2		8344.000	32.88	12.48	45.36	-28.64	74.00	Peak
3		8794.500	33.56	13.18	46.74	-21.46	68.20	Peak
4	*	10579.500	34.22	17.18	51.40	-16.80	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	110V/60Hz

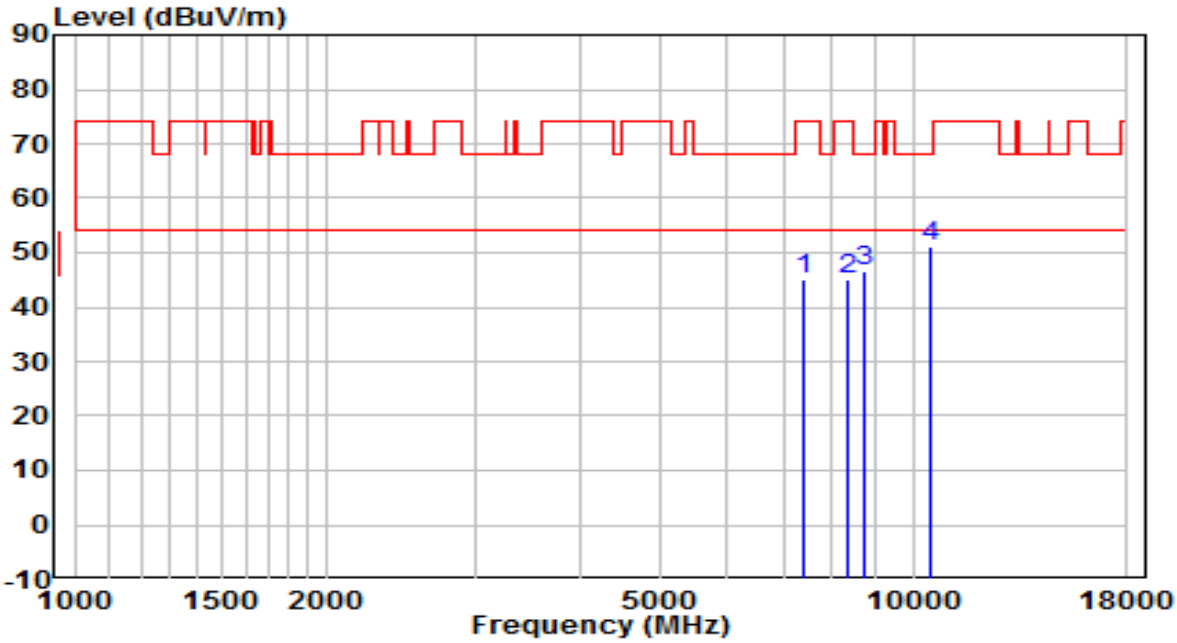


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7392.000	33.81	11.41	45.22	-28.78	74.00	Peak
2		8327.000	32.71	12.48	45.19	-28.81	74.00	Peak
3		8743.500	33.47	13.05	46.52	-21.68	68.20	Peak
4	*	10520.000	34.11	17.10	51.21	-16.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	110V/60Hz

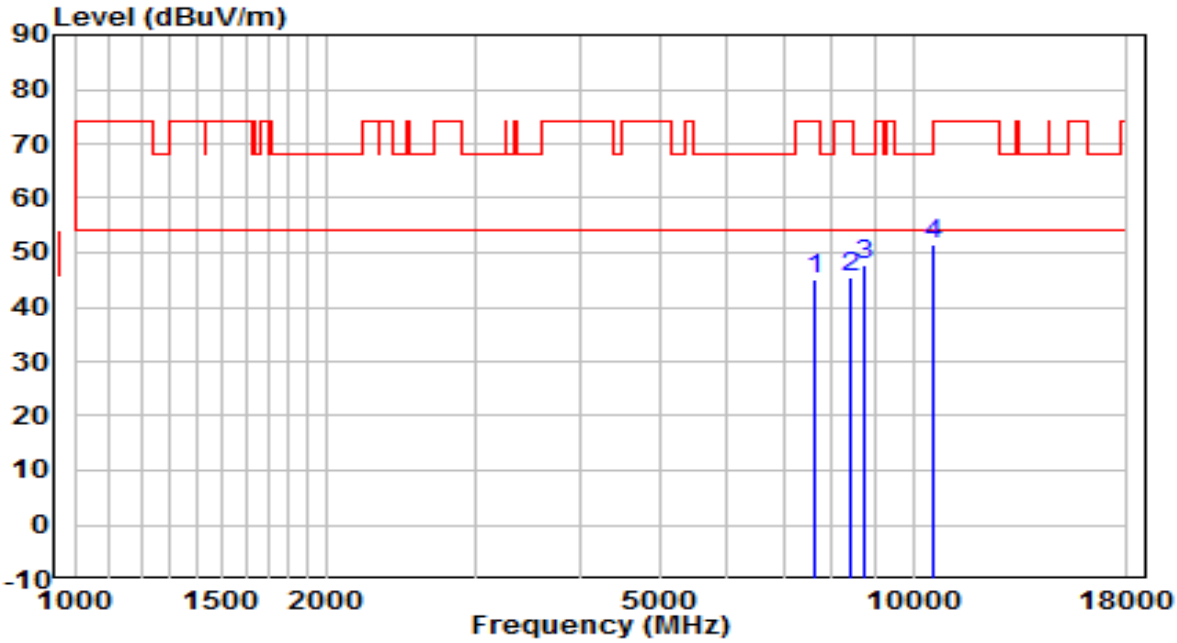


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7638.500	33.05	11.94	44.99	-29.01	74.00	Peak
2		8420.500	33.06	12.47	45.52	-28.48	74.00	Peak
3		8752.000	34.50	13.07	47.57	-20.63	68.20	Peak
4	*	10588.000	34.29	17.19	51.48	-16.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	110V/60Hz

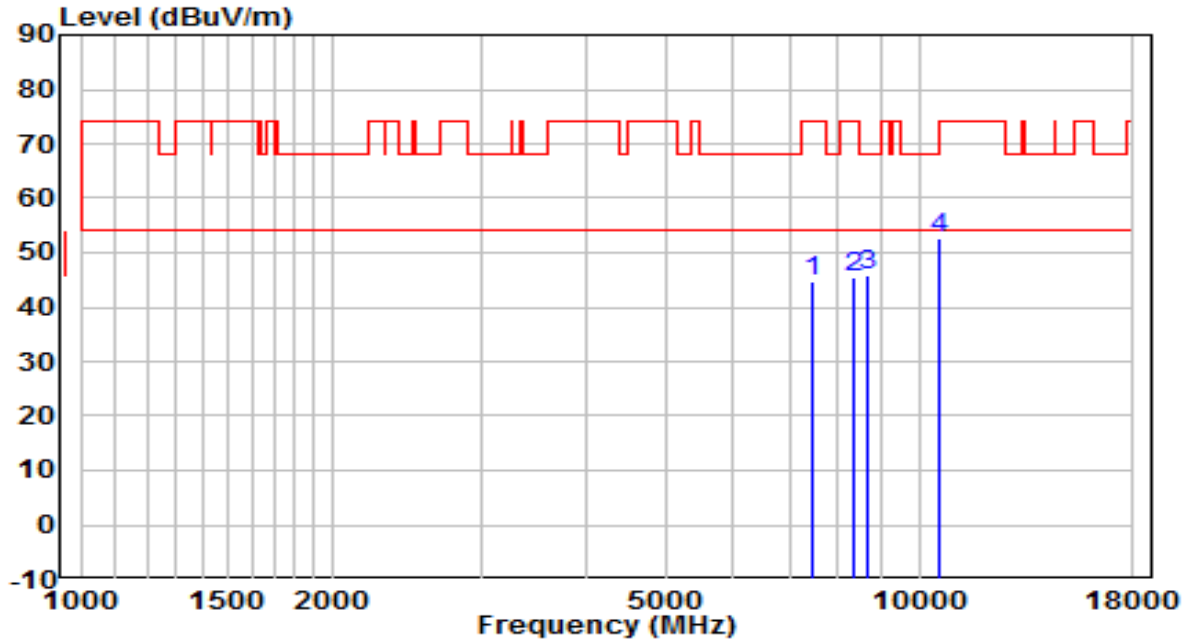


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7477.000	33.03	11.65	44.68	-29.32	74.00	Peak
2		8344.000	33.02	12.48	45.50	-28.50	74.00	Peak
3		8650.000	33.18	12.82	46.00	-22.20	68.20	Peak
4	*	10596.500	35.26	17.21	52.47	-15.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	110V/60Hz

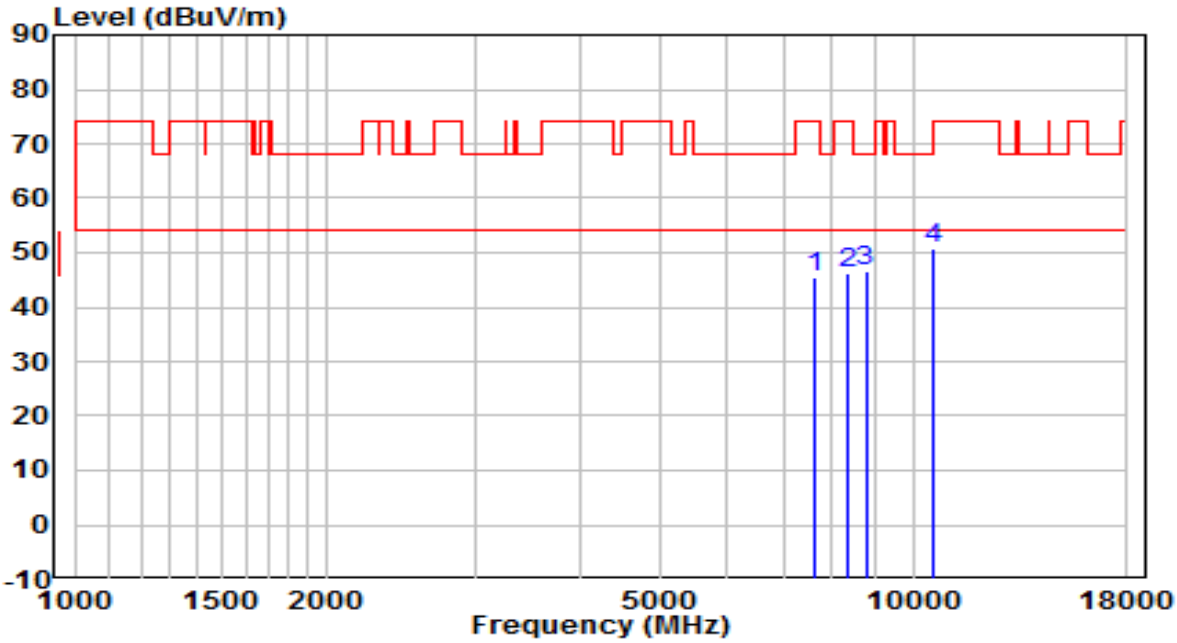


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7647.000	33.63	11.95	45.58	-28.42	74.00	Peak
2		8352.500	33.68	12.48	46.15	-27.85	74.00	Peak
3		8777.500	33.51	13.13	46.65	-21.55	68.20	Peak
4	*	10571.000	33.47	17.17	50.65	-17.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	110V/60Hz

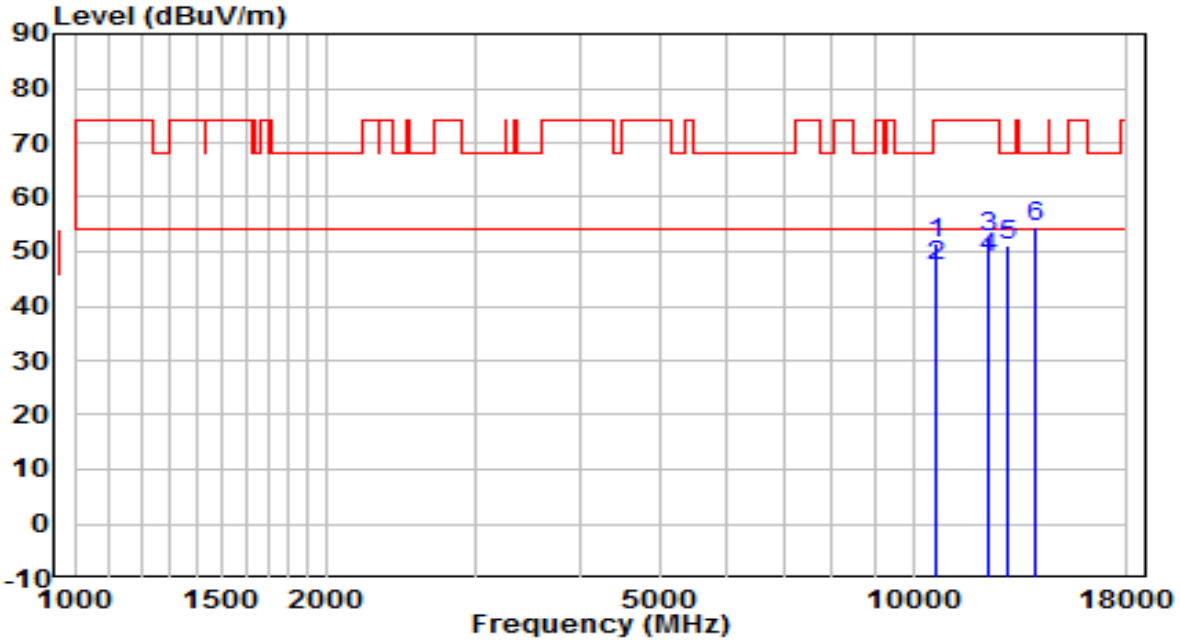


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		10639.000	34.20	17.27	51.47	-22.53	74.00	Peak
2		10639.000	30.16	17.27	47.43	-6.57	54.00	Average
3		12279.500	34.79	17.87	52.66	-21.34	74.00	Peak
4	*	12279.500	31.06	17.87	48.93	-5.07	54.00	Average
5		12993.500	31.74	19.27	51.01	-17.19	68.20	Peak
6	*	13954.000	33.16	21.43	54.59	-13.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	110V/60Hz

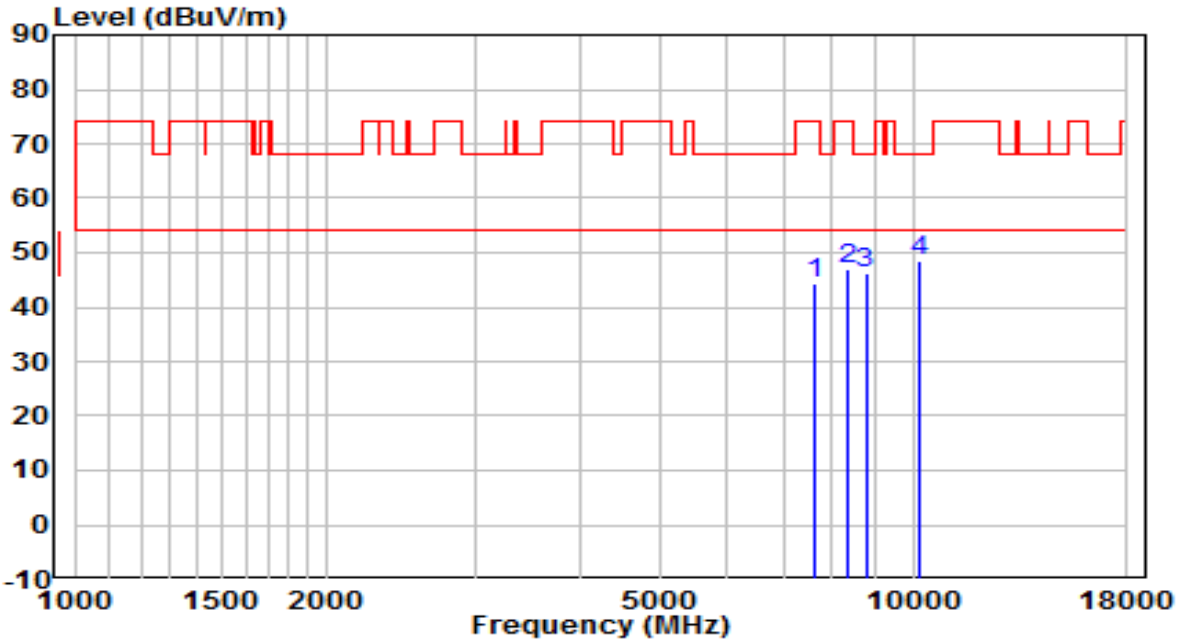


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7647.000	32.43	11.95	44.38	-29.62	74.00	Peak
2		8335.500	34.51	12.48	46.99	-27.01	74.00	Peak
3		8777.500	33.25	13.13	46.39	-21.81	68.20	Peak
4	*	10180.000	32.64	15.98	48.62	-19.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	110V/60Hz

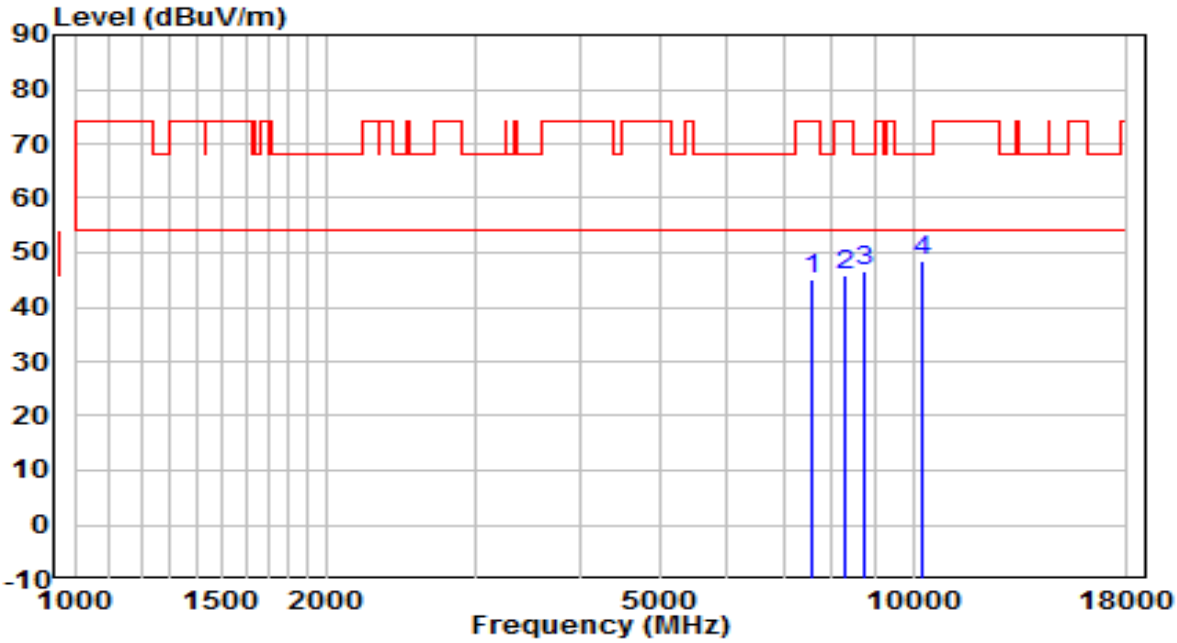


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7570.500	33.13	11.83	44.96	-29.04	74.00	Peak
2		8284.500	33.19	12.49	45.68	-28.32	74.00	Peak
3		8760.500	33.33	13.09	46.42	-21.78	68.20	Peak
4	*	10273.500	32.12	16.30	48.41	-19.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	110V/60Hz

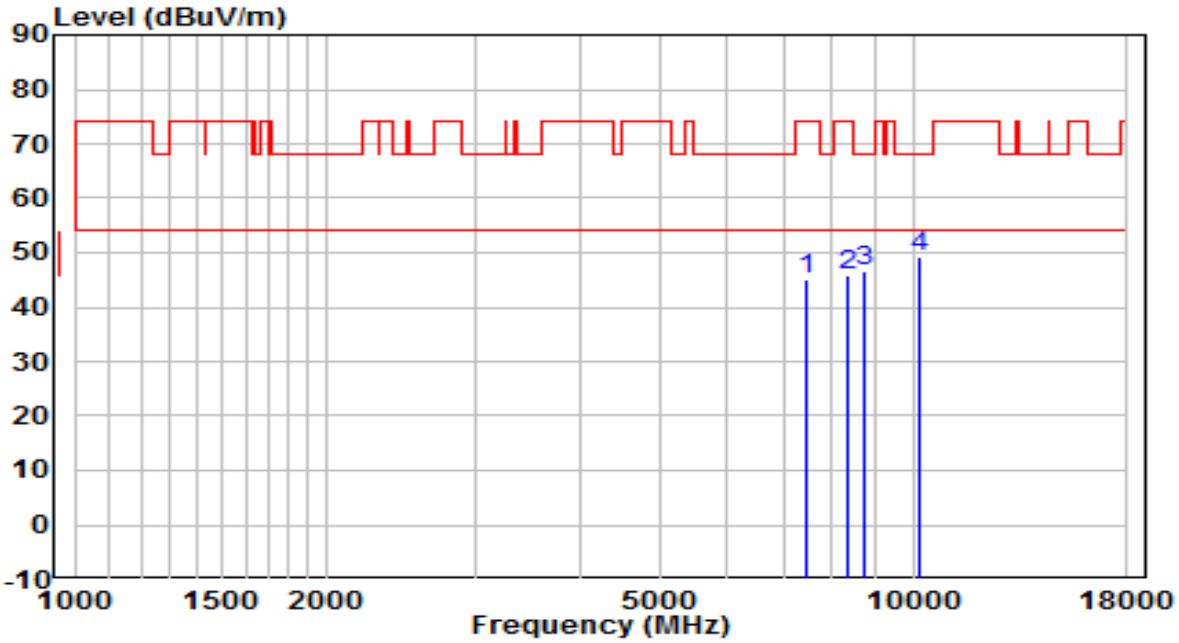


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7485.500	33.28	11.67	44.95	-29.05	74.00	Peak
2		8352.500	33.30	12.48	45.77	-28.23	74.00	Peak
3		8760.500	33.50	13.09	46.59	-21.61	68.20	Peak
4	*	10205.500	33.19	16.06	49.25	-18.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	110V/60Hz

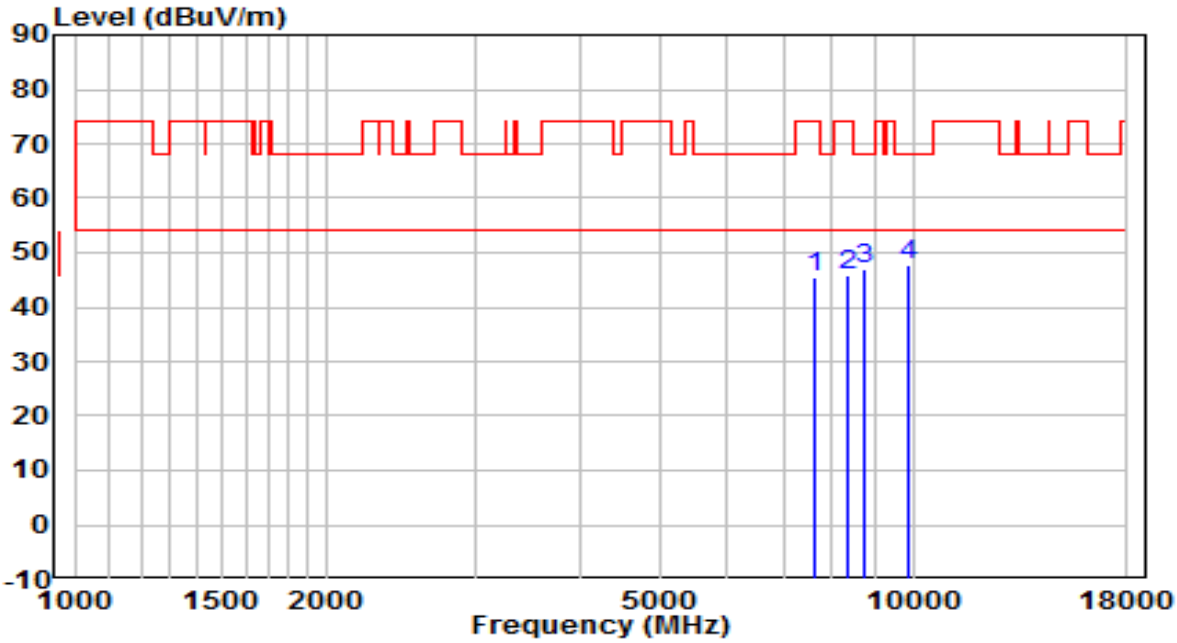


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7630.000	33.64	11.93	45.57	-28.43	74.00	Peak
2		8369.500	33.40	12.47	45.87	-28.13	74.00	Peak
3		8769.000	33.87	13.11	46.98	-21.22	68.20	Peak
4	*	9882.500	32.69	15.14	47.83	-20.37	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	110V/60Hz

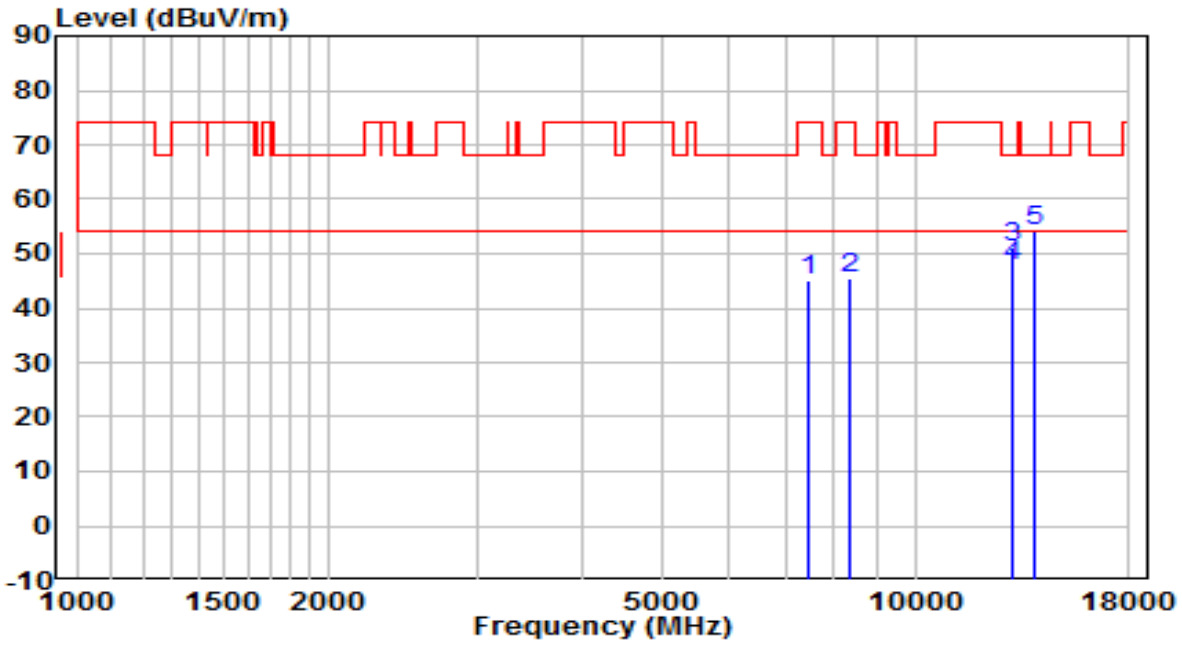


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7443.000	33.65	11.55	45.20	-28.80	74.00	Peak
2		8352.500	33.13	12.48	45.61	-28.39	74.00	Peak
3		13104.000	31.73	19.55	51.28	-16.92	68.20	Peak
4	*	13104.000	28.16	19.55	47.71	-6.29	54.00	Average
5		13928.500	32.93	21.38	54.31	-13.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	110V/60Hz

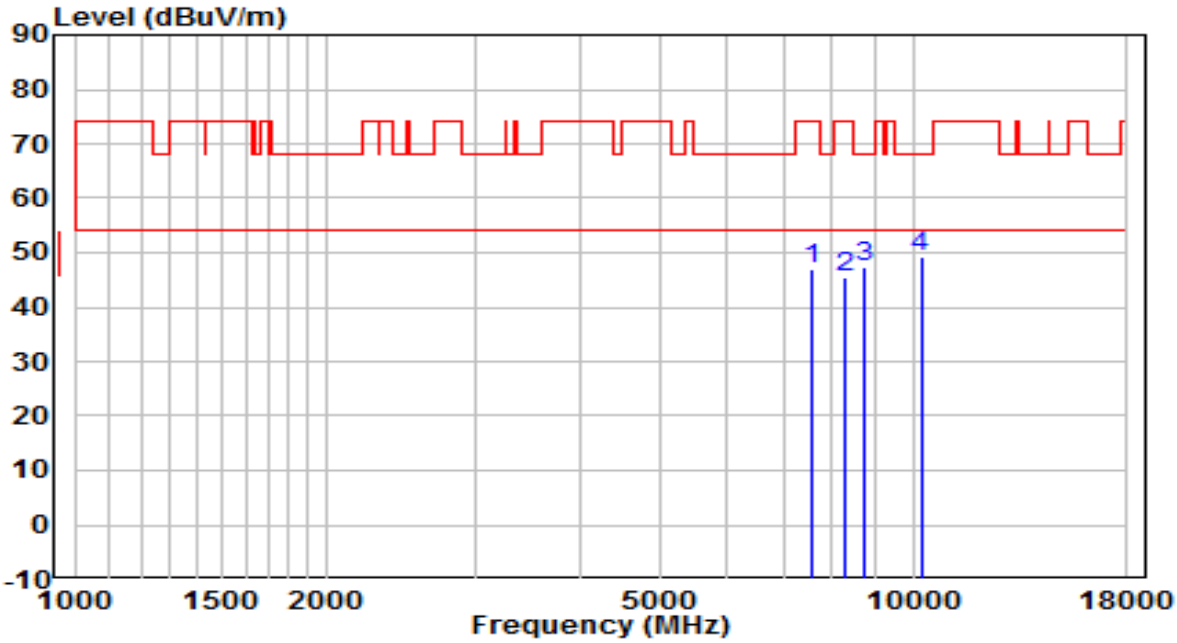


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7596.000	35.09	11.87	46.96	-27.04	74.00	Peak
2		8267.500	33.09	12.49	45.58	-28.42	74.00	Peak
3		8752.000	34.17	13.07	47.25	-20.95	68.20	Peak
4	*	10214.000	33.08	16.09	49.17	-19.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	110V/60Hz

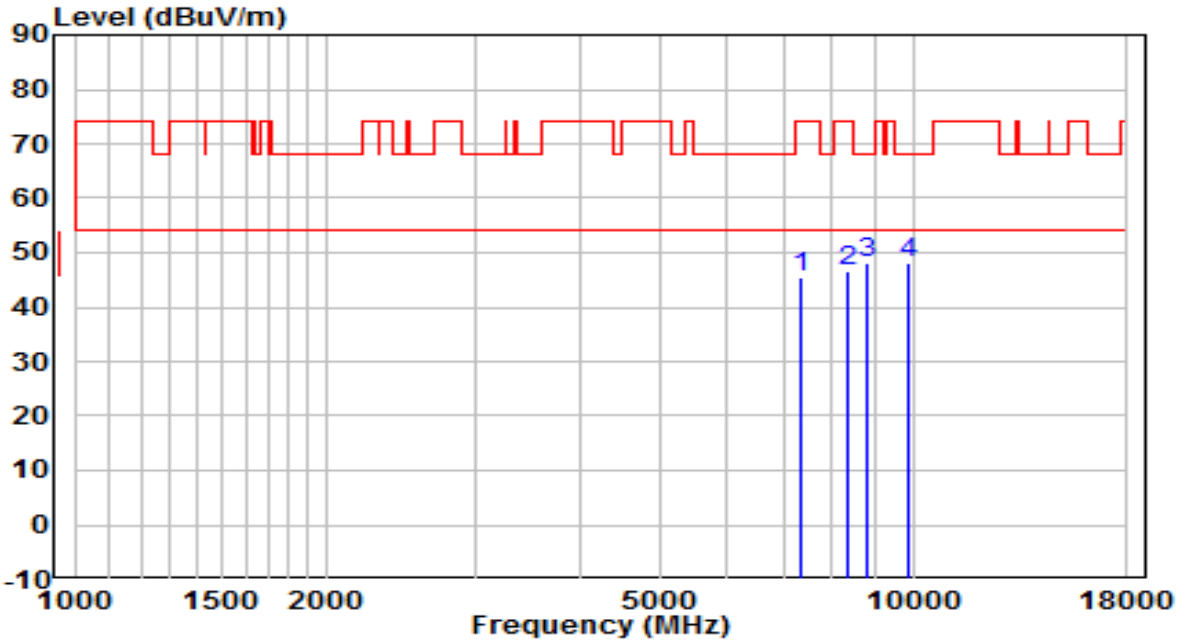


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7324.000	34.18	11.22	45.40	-28.60	74.00	Peak
2		8352.500	34.04	12.48	46.51	-27.49	74.00	Peak
3	*	8786.000	34.79	13.16	47.94	-20.26	68.20	Peak
4		9891.000	32.77	15.16	47.93	-20.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	110V/60Hz

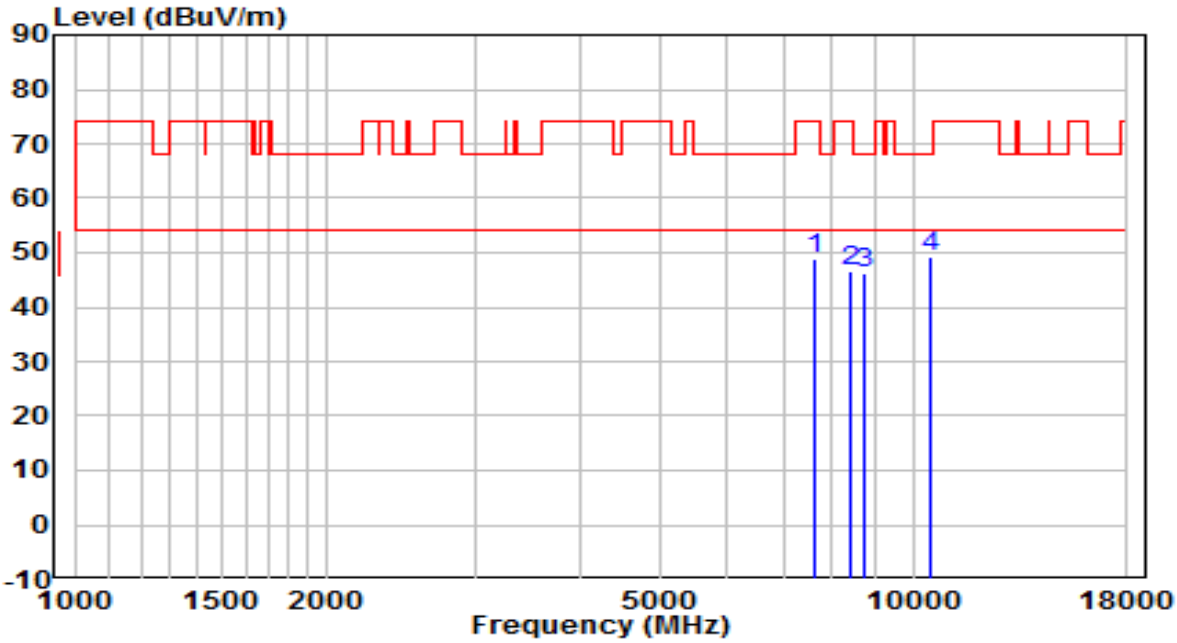


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7630.000	36.88	11.93	48.80	-25.20	74.00	Peak
2		8412.000	34.18	12.47	46.65	-27.35	74.00	Peak
3		8752.000	32.99	13.07	46.06	-22.14	68.20	Peak
4	*	10511.500	32.32	17.09	49.41	-18.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	110V/60Hz

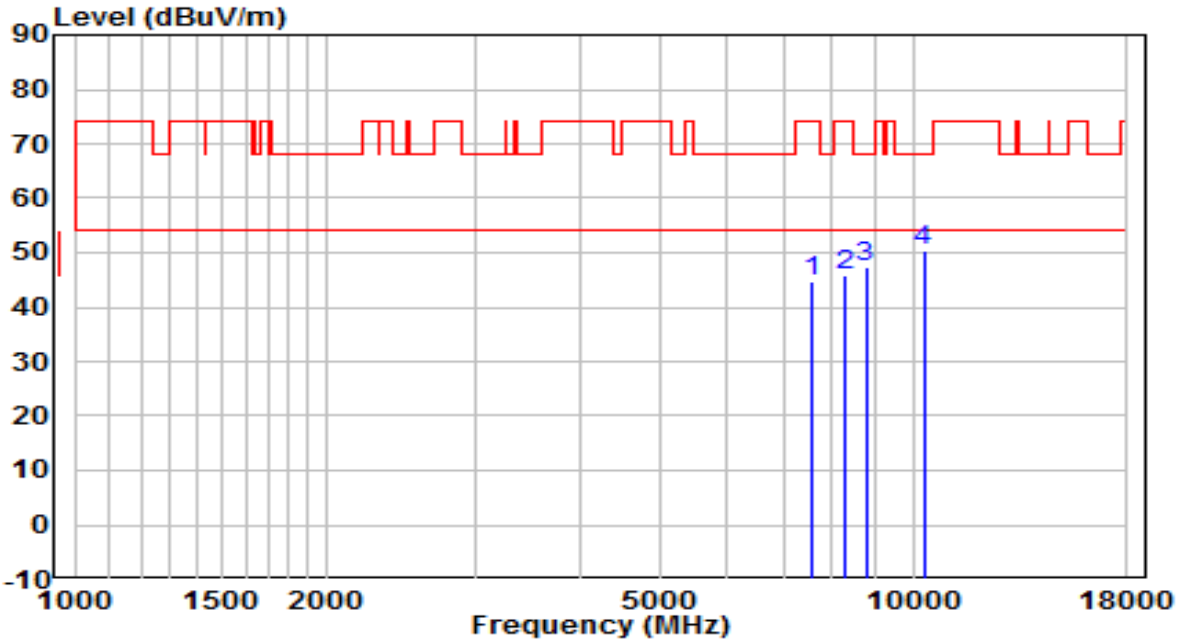


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7562.000	32.98	11.82	44.80	-29.20	74.00	Peak
2		8301.500	33.34	12.48	45.82	-28.18	74.00	Peak
3		8777.500	34.19	13.13	47.32	-20.88	68.20	Peak
4	*	10290.500	33.99	16.35	50.34	-17.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	110V/60Hz

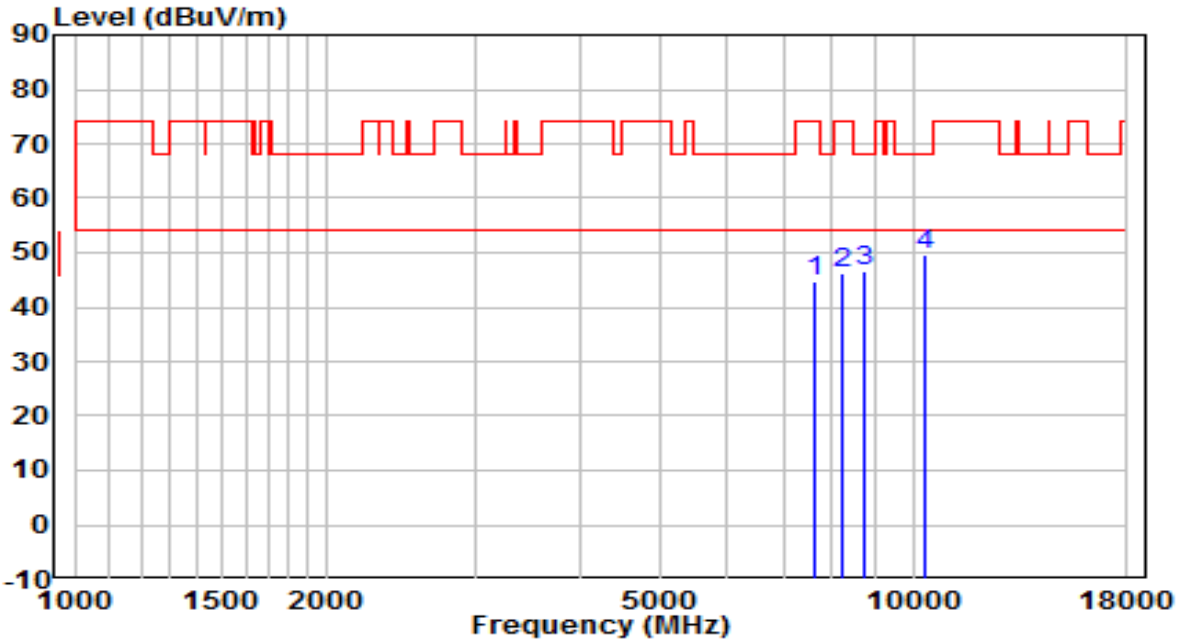


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7621.500	32.76	11.91	44.67	-29.33	74.00	Peak
2		8259.000	33.90	12.49	46.39	-27.61	74.00	Peak
3		8769.000	33.67	13.11	46.79	-21.41	68.20	Peak
4	*	10324.500	33.04	16.47	49.51	-18.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	110V/60Hz

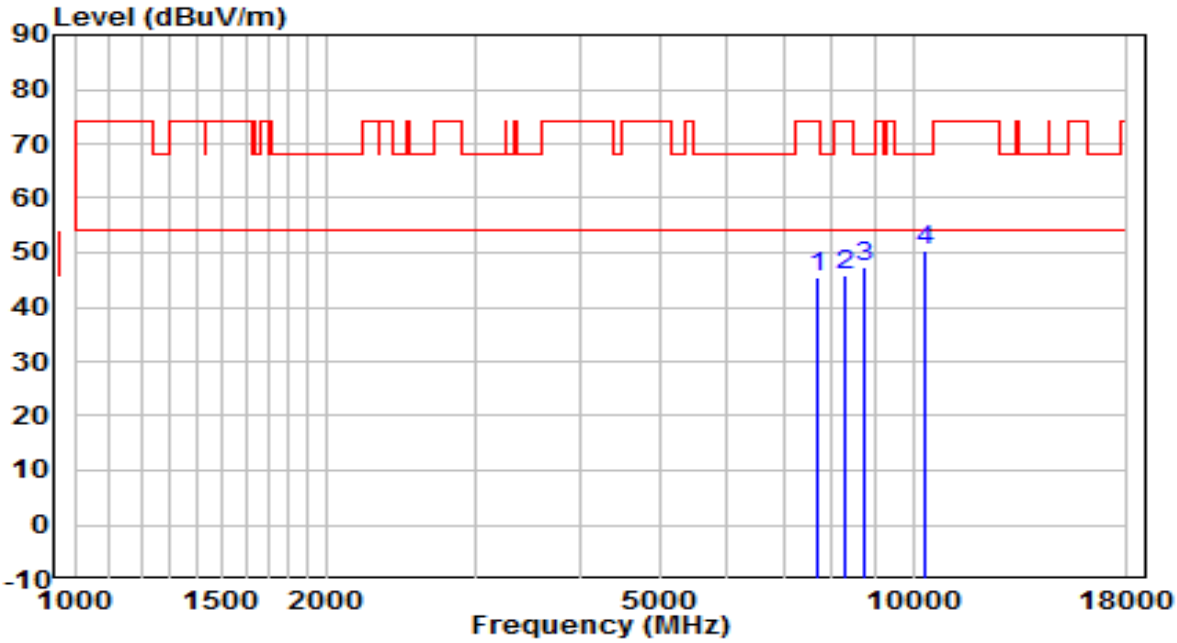


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7664.000	33.43	11.98	45.41	-28.59	74.00	Peak
2		8318.500	33.24	12.48	45.73	-28.27	74.00	Peak
3		8769.000	34.33	13.11	47.45	-20.75	68.20	Peak
4	*	10316.000	34.03	16.44	50.47	-17.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	110V/60Hz

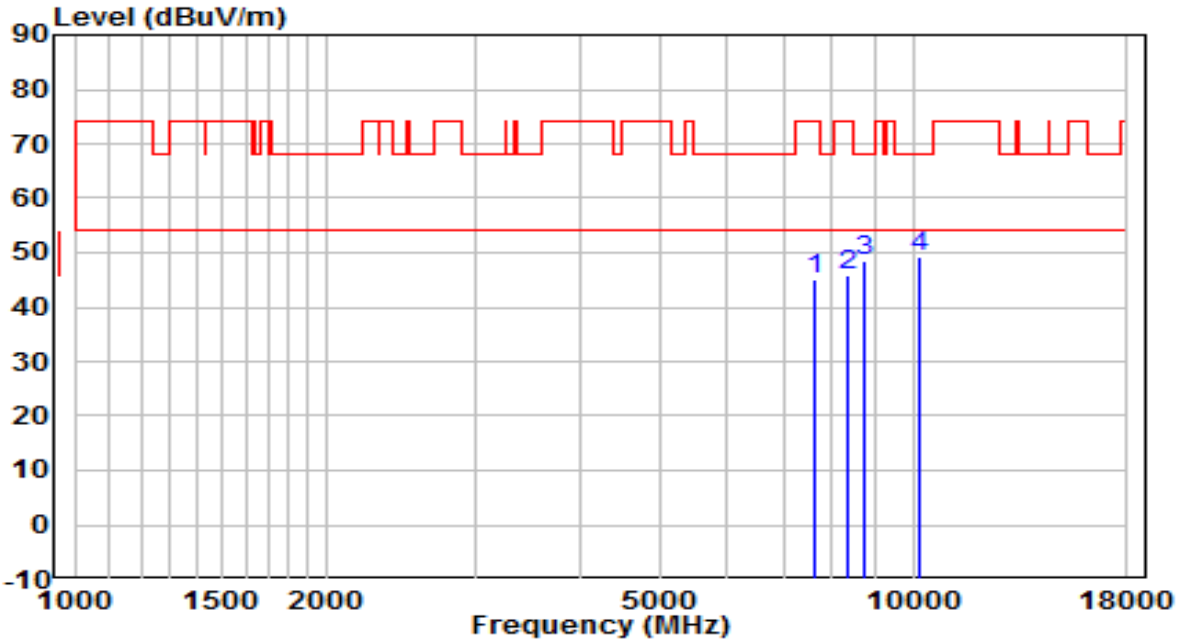


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7638.500	32.99	11.94	44.93	-29.07	74.00	Peak
2		8344.000	33.25	12.48	45.72	-28.28	74.00	Peak
3		8760.500	35.24	13.09	48.33	-19.87	68.20	Peak
4	*	10180.000	33.18	15.98	49.16	-19.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	110V/60Hz

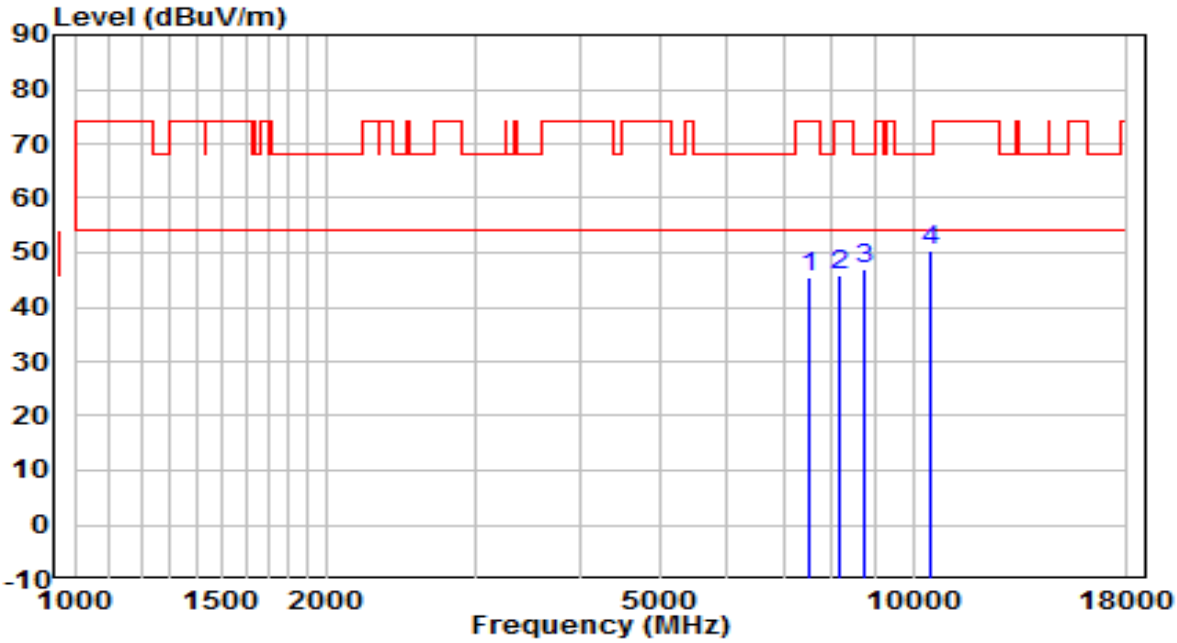


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7528.000	33.62	11.76	45.38	-28.62	74.00	Peak
2		8191.000	33.31	12.50	45.81	-28.19	74.00	Peak
3		8769.000	34.04	13.11	47.15	-21.05	68.20	Peak
4	*	10494.500	33.48	17.05	50.53	-17.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	110V/60Hz

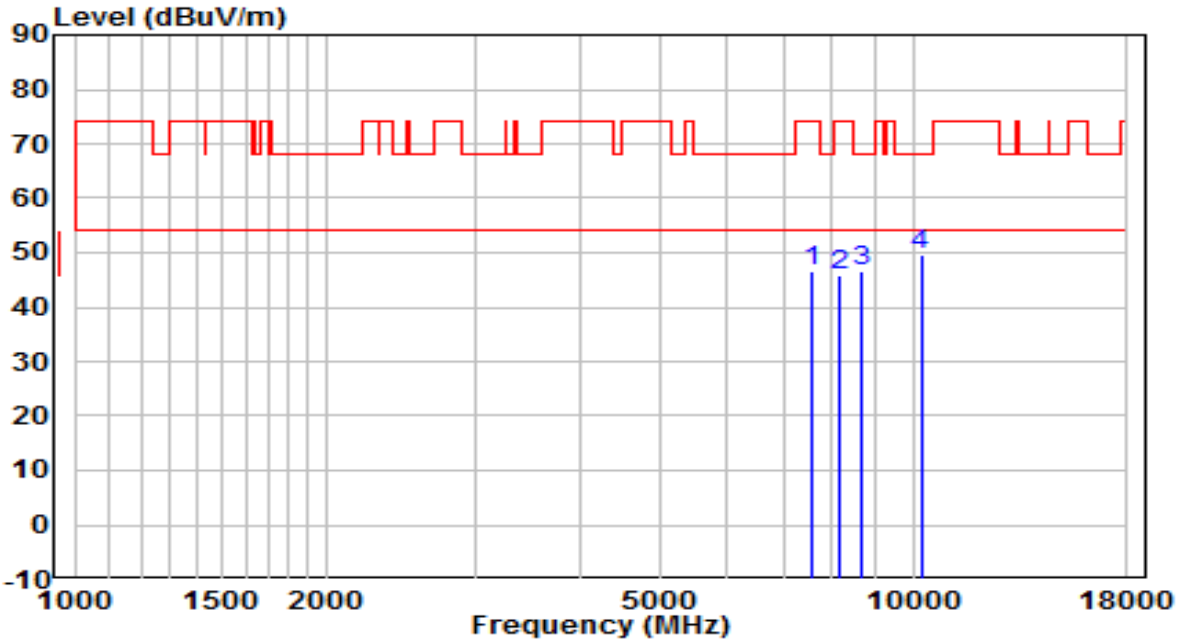


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7562.000	34.82	11.82	46.64	-27.36	74.00	Peak
2		8174.000	33.20	12.50	45.70	-28.30	74.00	Peak
3		8684.000	33.79	12.91	46.70	-21.50	68.20	Peak
4	*	10214.000	33.51	16.09	49.60	-18.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	110V/60Hz

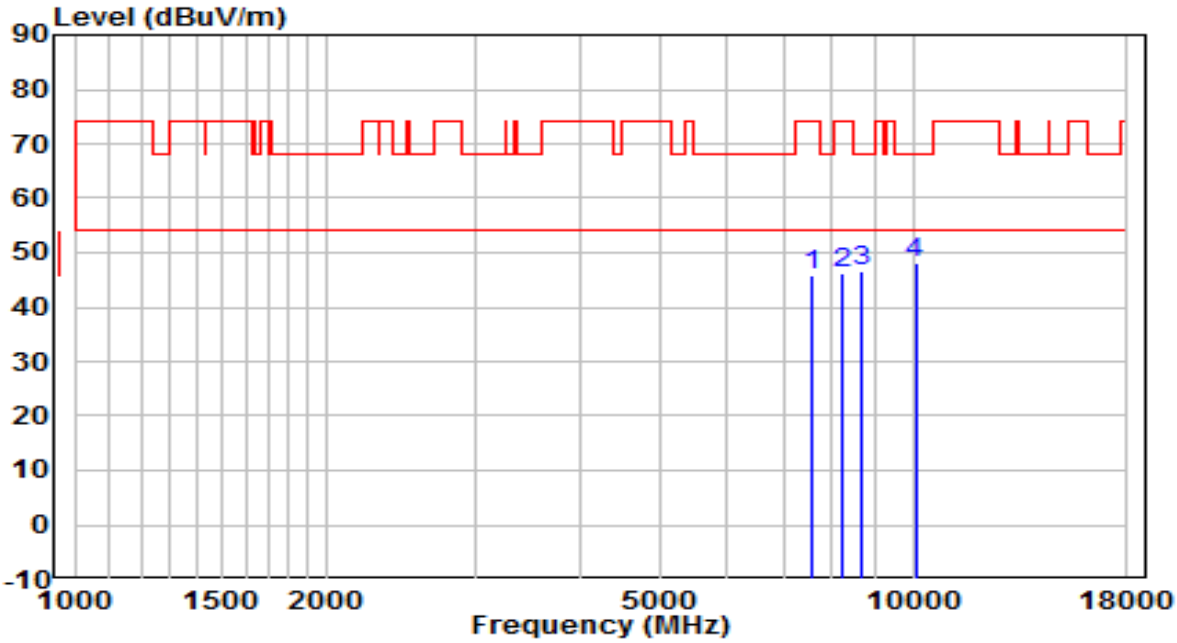


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7553.500	33.88	11.80	45.69	-28.31	74.00	Peak
2		8242.000	33.90	12.49	46.40	-27.60	74.00	Peak
3		8709.500	33.80	12.97	46.77	-21.43	68.20	Peak
4	*	10061.000	32.68	15.57	48.25	-19.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	110V/60Hz

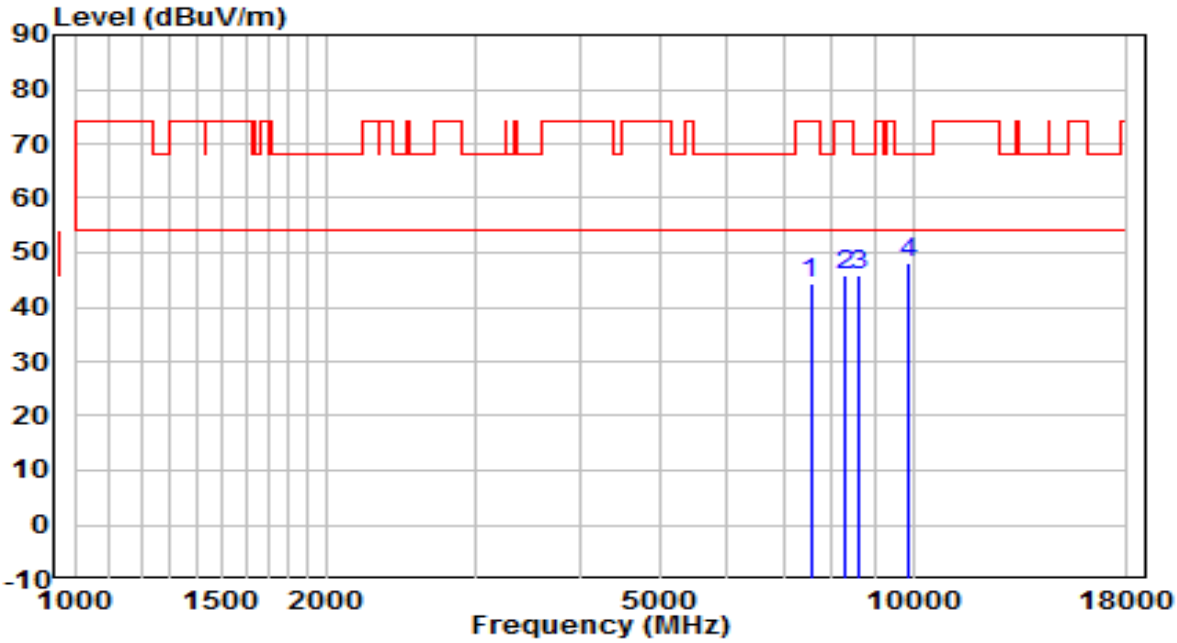


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7545.000	32.61	11.79	44.40	-29.60	74.00	Peak
2		8310.000	33.37	12.48	45.86	-28.14	74.00	Peak
3		8616.000	32.95	12.74	45.69	-22.51	68.20	Peak
4	*	9848.500	33.22	15.08	48.30	-19.90	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	110V/60Hz

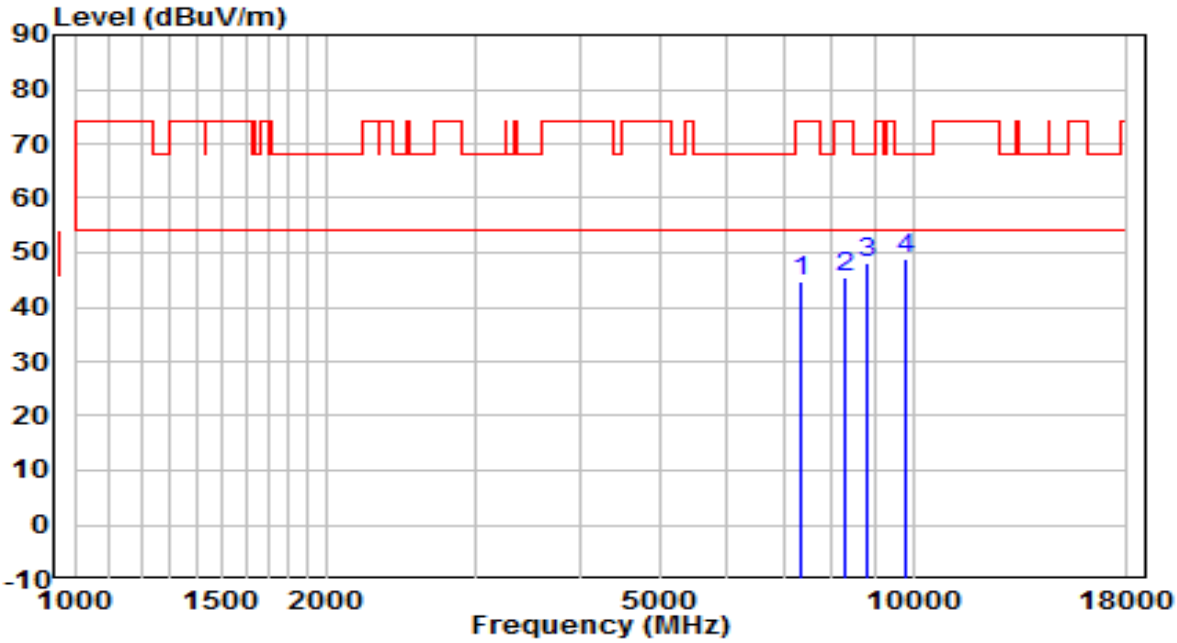


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7324.000	33.53	11.22	44.75	-29.25	74.00	Peak
2		8310.000	32.89	12.48	45.37	-28.63	74.00	Peak
3		8786.000	34.96	13.16	48.12	-20.08	68.20	Peak
4	*	9831.500	33.78	15.04	48.82	-19.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	110V/60Hz

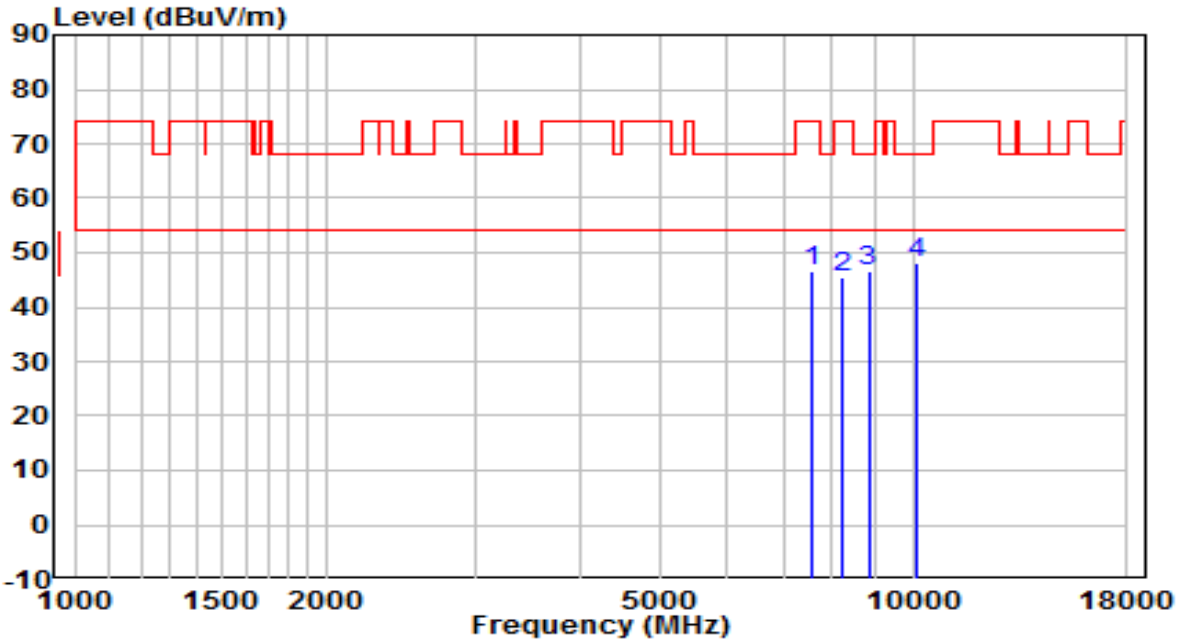


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7553.500	34.86	11.80	46.66	-27.34	74.00	Peak
2		8208.000	32.94	12.50	45.44	-28.56	74.00	Peak
3		8845.500	33.41	13.30	46.71	-21.49	68.20	Peak
4	*	10086.500	32.59	15.66	48.25	-19.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	110V/60Hz

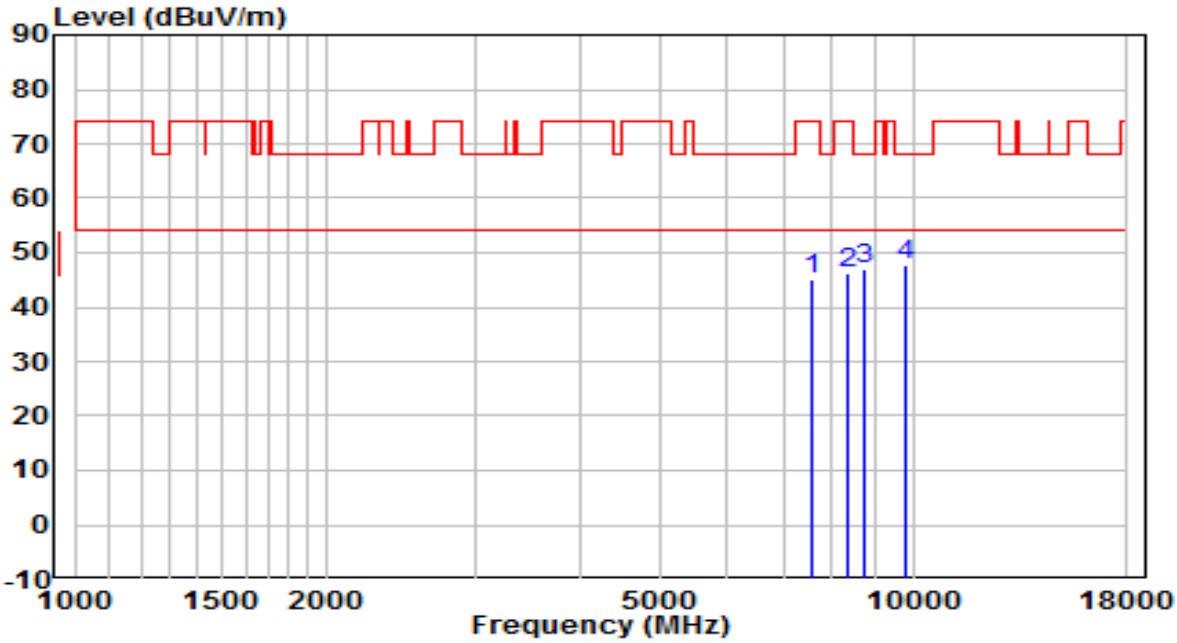


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7553.500	33.39	11.80	45.20	-28.80	74.00	Peak
2		8352.500	33.69	12.48	46.17	-27.83	74.00	Peak
3		8769.000	33.87	13.11	46.99	-21.21	68.20	Peak
4	*	9831.500	32.62	15.04	47.66	-20.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	110V/60Hz

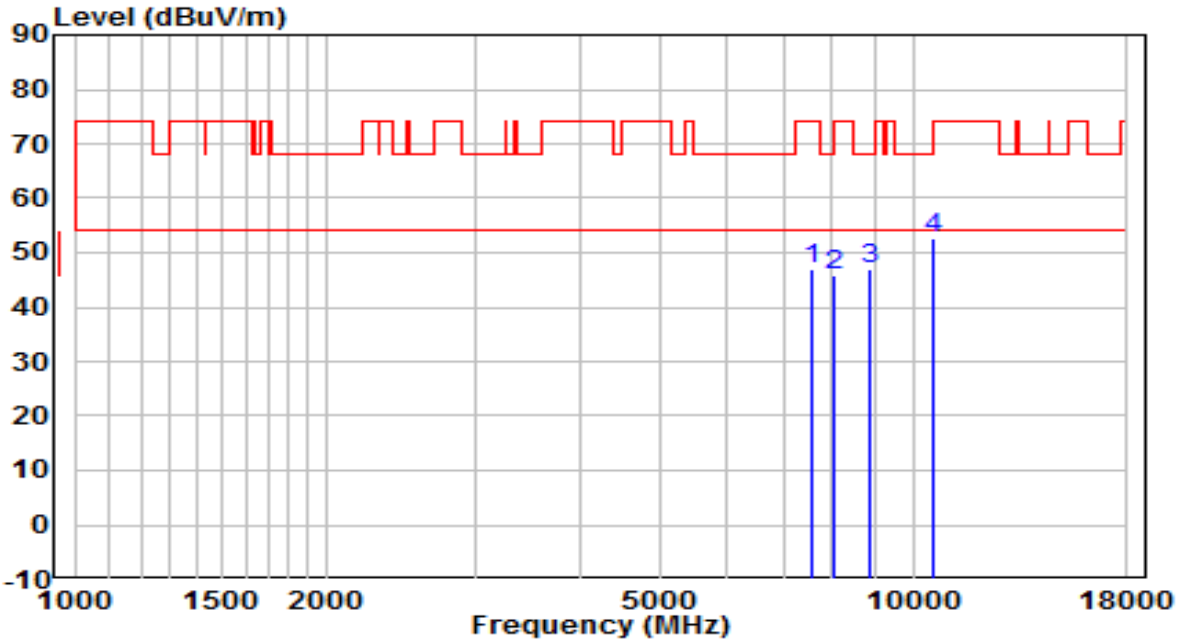


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7596.000	34.95	11.87	46.83	-27.17	74.00	Peak
2		8072.000	33.48	12.52	46.00	-28.00	74.00	Peak
3		8896.500	33.51	13.43	46.93	-21.27	68.20	Peak
4	*	10537.000	35.63	17.12	52.76	-15.44	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	110V/60Hz

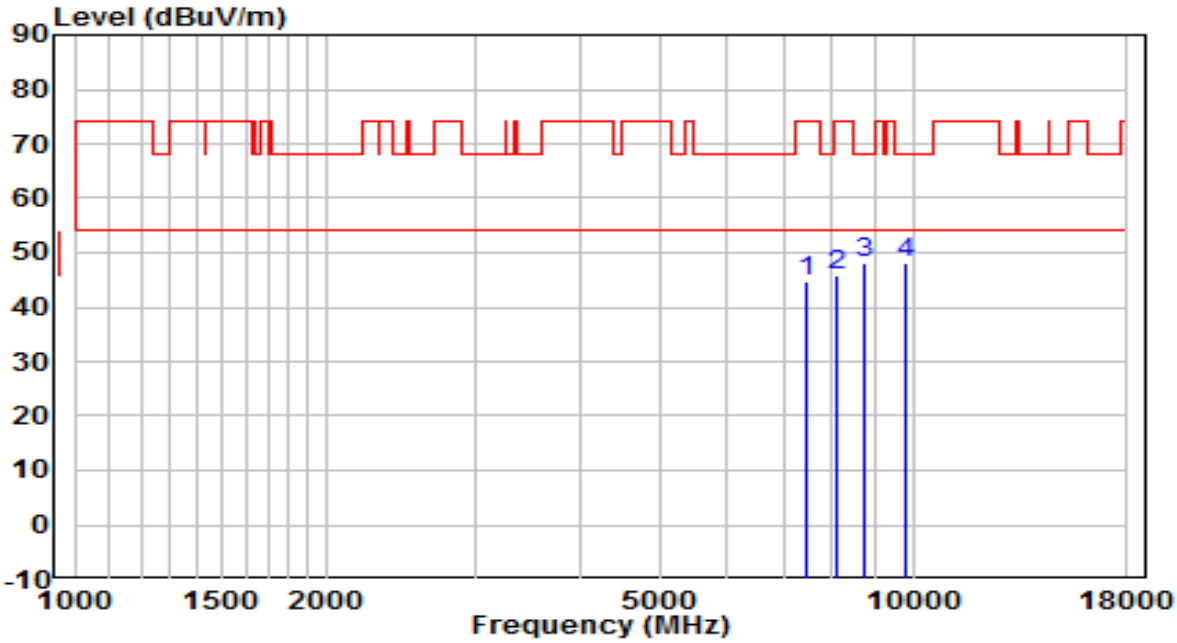


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7460.000	33.19	11.60	44.79	-29.21	74.00	Peak
2		8080.500	33.29	12.52	45.81	-28.19	74.00	Peak
3		8760.500	34.91	13.09	48.00	-20.20	68.20	Peak
4	*	9831.500	33.11	15.04	48.16	-20.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	110V/60Hz

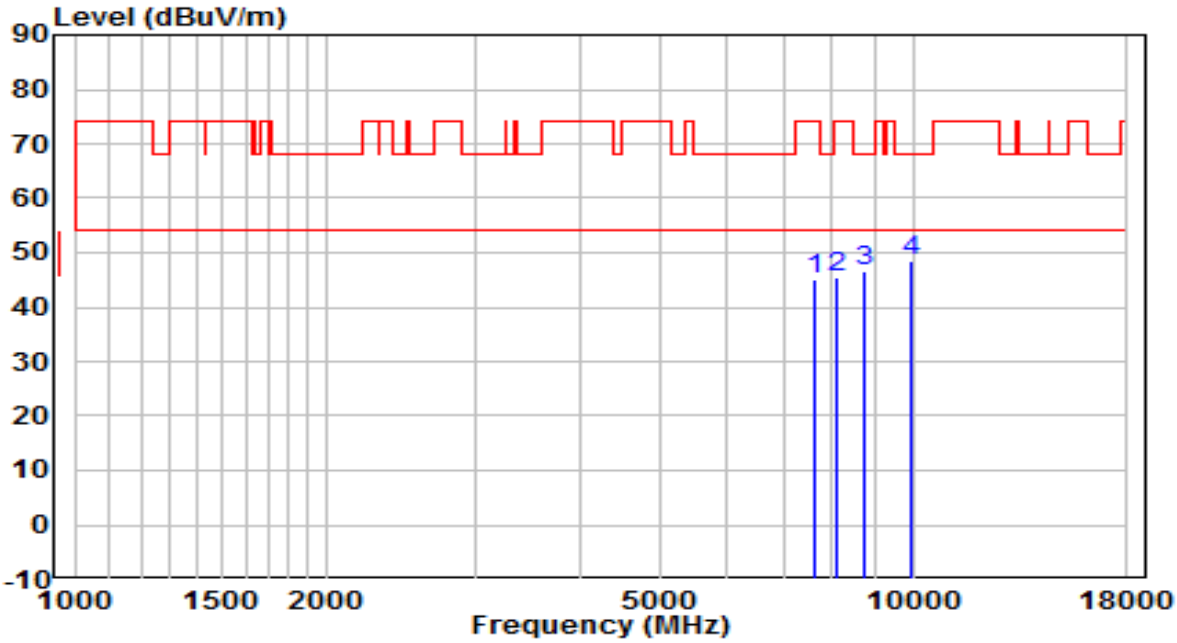


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7655.500	33.15	11.97	45.12	-28.88	74.00	Peak
2		8080.500	32.84	12.52	45.36	-28.64	74.00	Peak
3		8769.000	33.34	13.11	46.45	-21.75	68.20	Peak
4	*	9933.500	33.20	15.23	48.44	-19.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	110V/60Hz

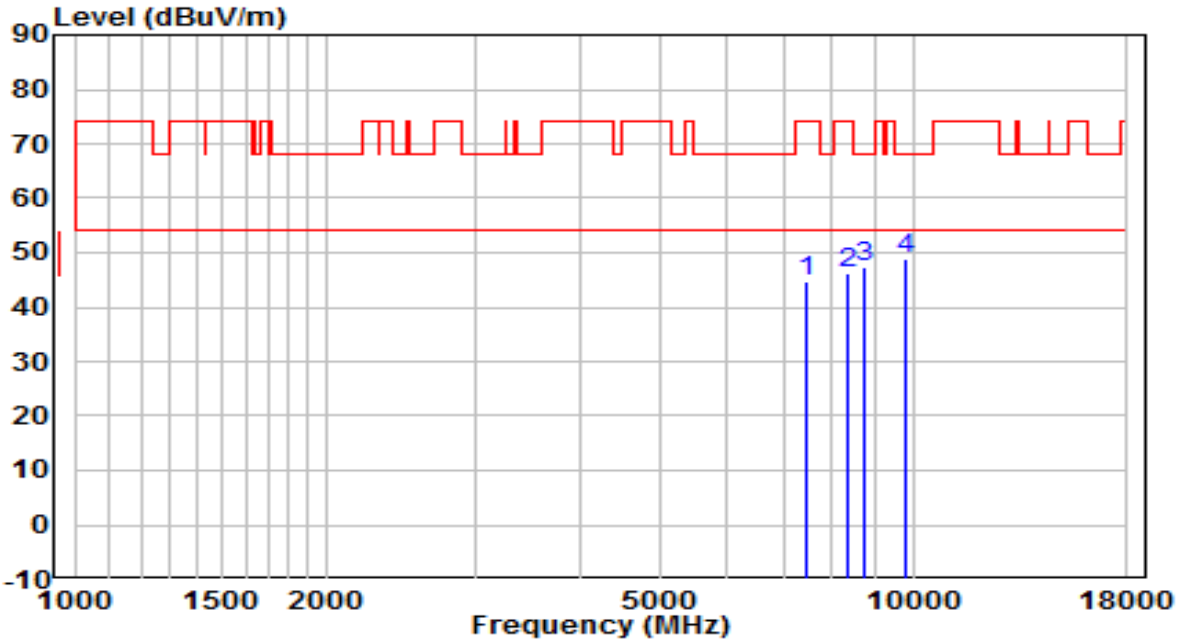


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7477.000	33.13	11.65	44.78	-29.22	74.00	Peak
2		8369.500	33.93	12.47	46.40	-27.60	74.00	Peak
3		8760.500	34.09	13.09	47.18	-21.02	68.20	Peak
4	*	9763.500	33.89	14.92	48.81	-19.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	110V/60Hz

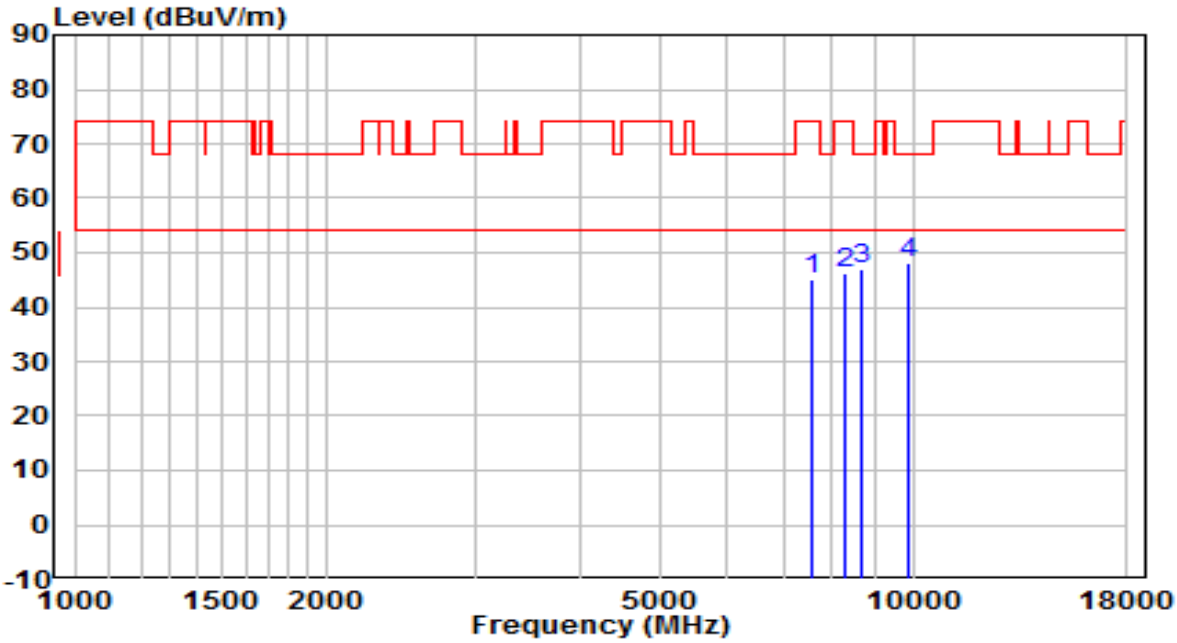

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7596.000	33.41	11.87	45.28	-28.72	74.00	Peak
2		8318.500	33.73	12.48	46.22	-27.78	74.00	Peak
3		8658.500	34.02	12.84	46.86	-21.34	68.20	Peak
4	*	9874.000	33.02	15.12	48.14	-20.06	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	110V/60Hz

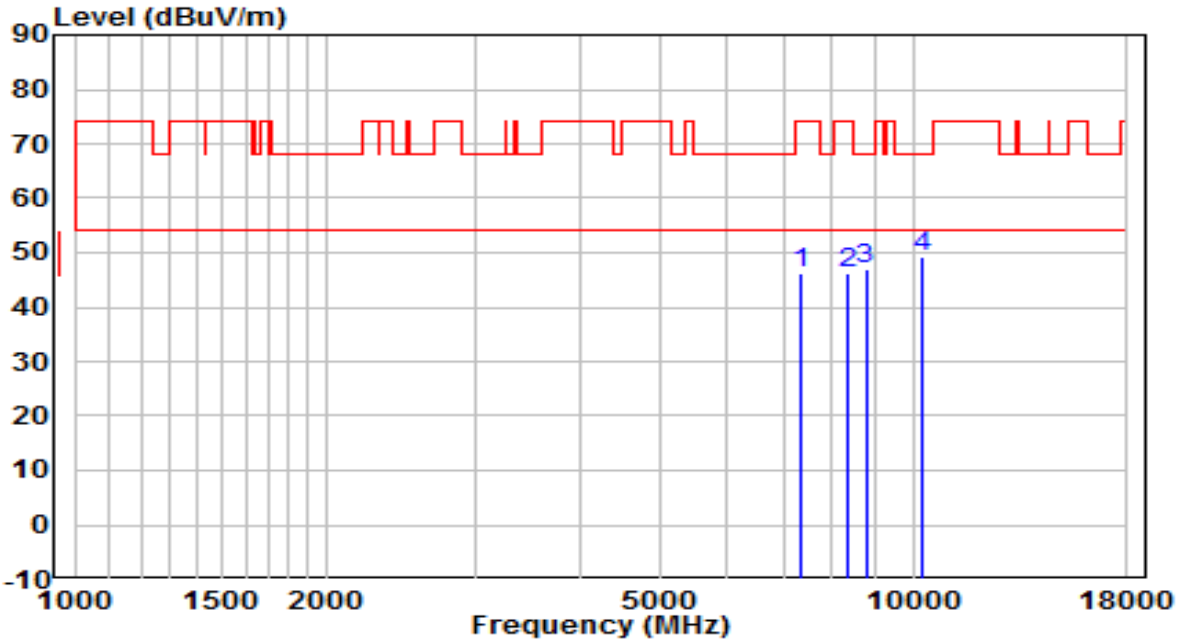


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7349.500	35.08	11.29	46.36	-27.64	74.00	Peak
2		8335.500	33.78	12.48	46.26	-27.74	74.00	Peak
3		8777.500	33.82	13.13	46.96	-21.24	68.20	Peak
4	*	10239.500	32.99	16.18	49.17	-19.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	110V/60Hz

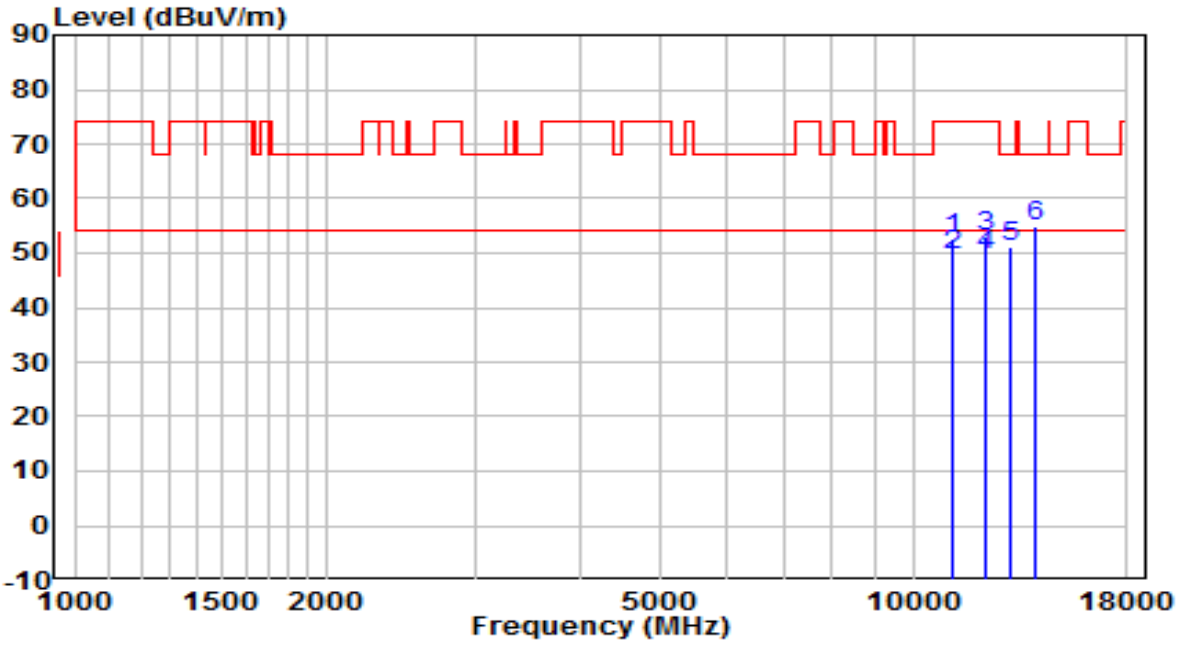


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		11106.500	34.56	17.92	52.49	-21.51	74.00	Peak
2		11106.500	31.53	17.92	49.45	-4.55	54.00	Average
3		12211.500	35.08	17.86	52.93	-21.07	74.00	Peak
4	*	12211.500	31.64	17.86	49.50	-4.50	54.00	Average
5		13044.500	31.66	19.40	51.06	-17.14	68.20	Peak
6		14022.000	33.50	21.51	55.01	-13.19	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	110V/60Hz

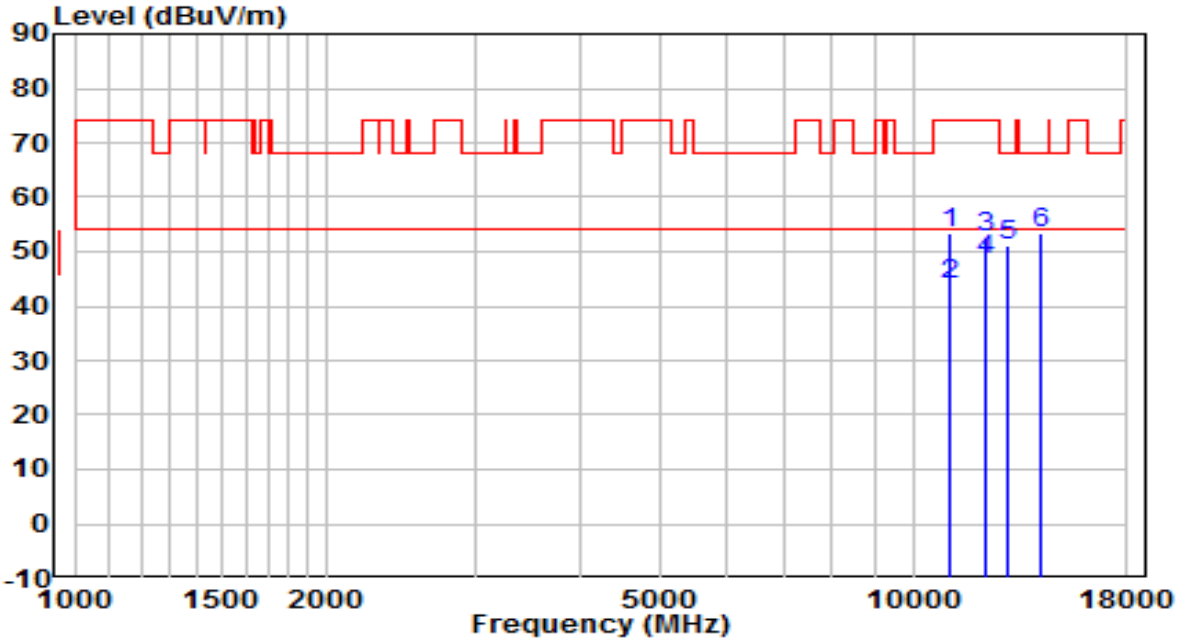


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		11089.500	35.42	17.90	53.32	-20.68	74.00	Peak
2		11089.500	25.99	17.90	43.89	-10.11	54.00	Average
3		12228.500	34.79	17.86	52.65	-21.35	74.00	Peak
4	*	12228.500	30.61	17.86	48.47	-5.53	54.00	Average
5		12925.500	31.88	19.08	50.96	-17.24	68.20	Peak
6		14200.500	31.91	21.45	53.36	-14.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	110V/60Hz

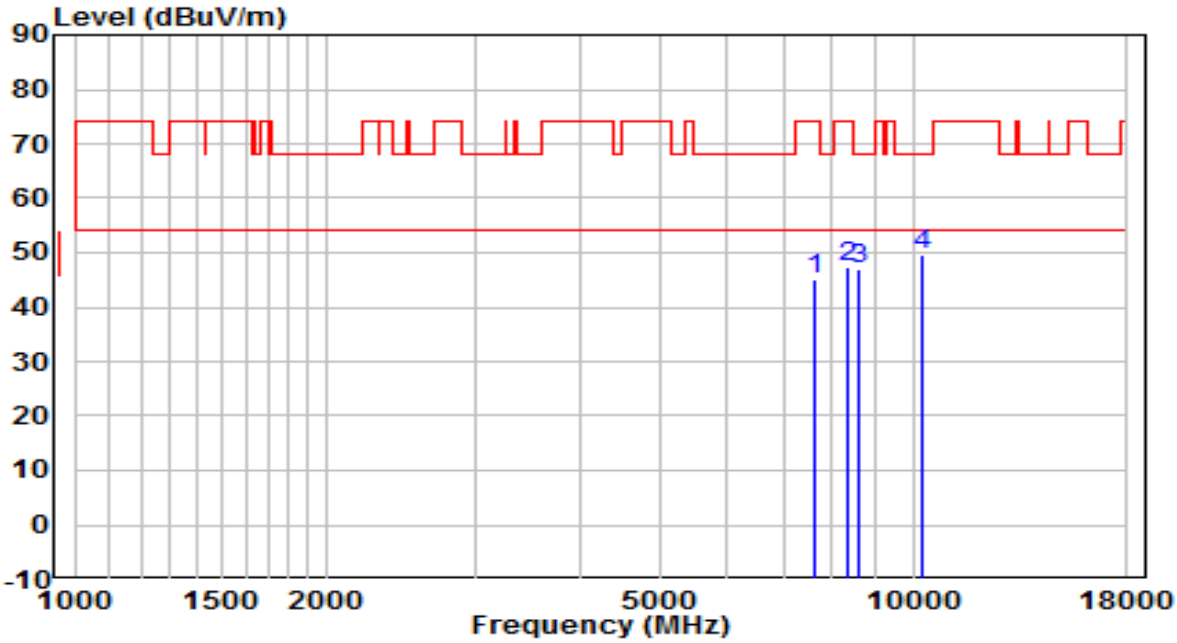


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7604.500	33.27	11.89	45.16	-28.84	74.00	Peak
2		8327.000	34.73	12.48	47.21	-26.79	74.00	Peak
3		8624.500	34.03	12.76	46.79	-21.41	68.20	Peak
4	*	10265.000	33.22	16.27	49.49	-18.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	110V/60Hz

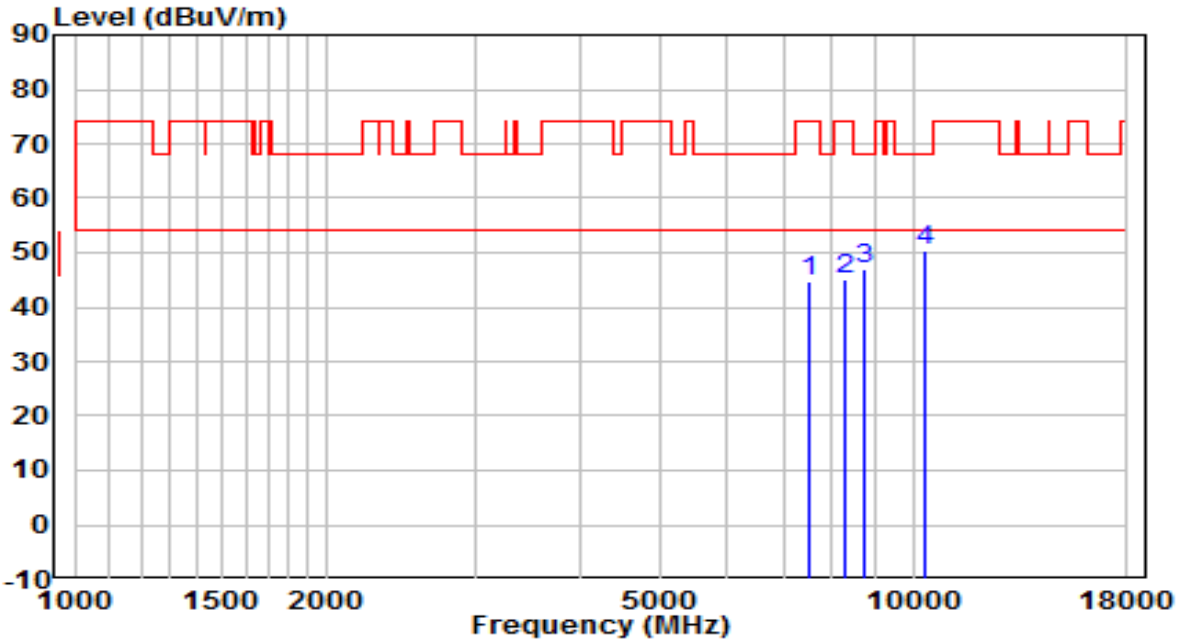


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7519.500	32.99	11.75	44.73	-29.27	74.00	Peak
2		8276.000	32.78	12.49	45.27	-28.73	74.00	Peak
3		8752.000	33.83	13.07	46.90	-21.30	68.20	Peak
4	*	10341.500	33.73	16.53	50.26	-17.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	110V/60Hz

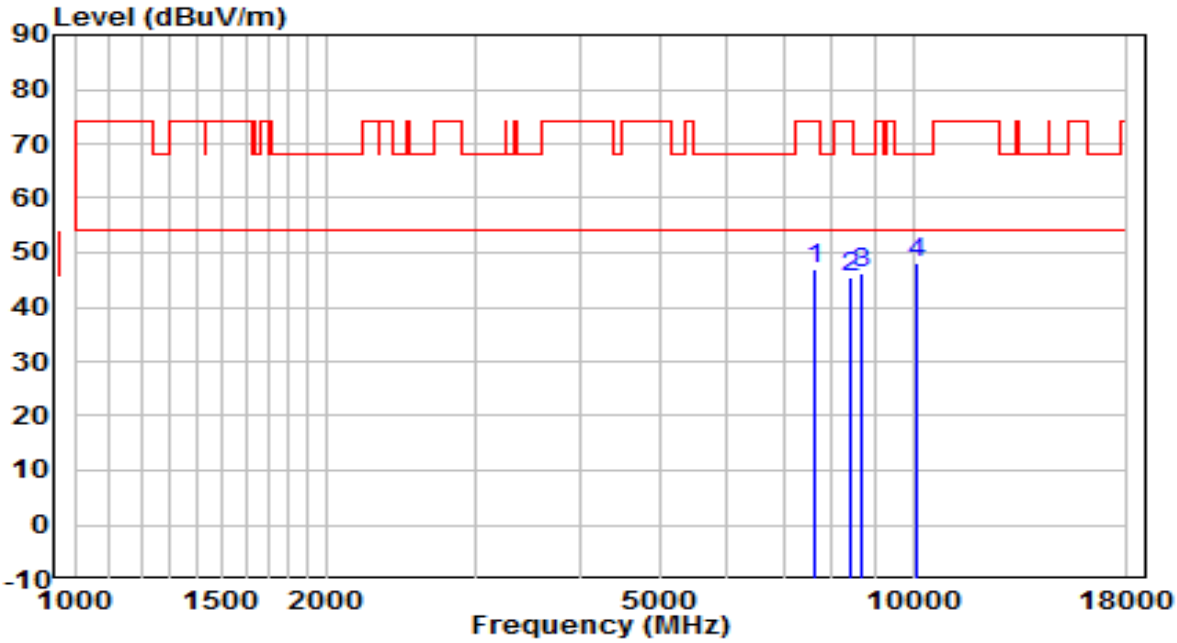


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7613.000	35.26	11.90	47.16	-26.84	74.00	Peak
2		8429.000	33.11	12.47	45.58	-28.42	74.00	Peak
3		8658.500	33.57	12.84	46.41	-21.79	68.20	Peak
4	*	10095.000	32.24	15.68	47.93	-20.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	110V/60Hz

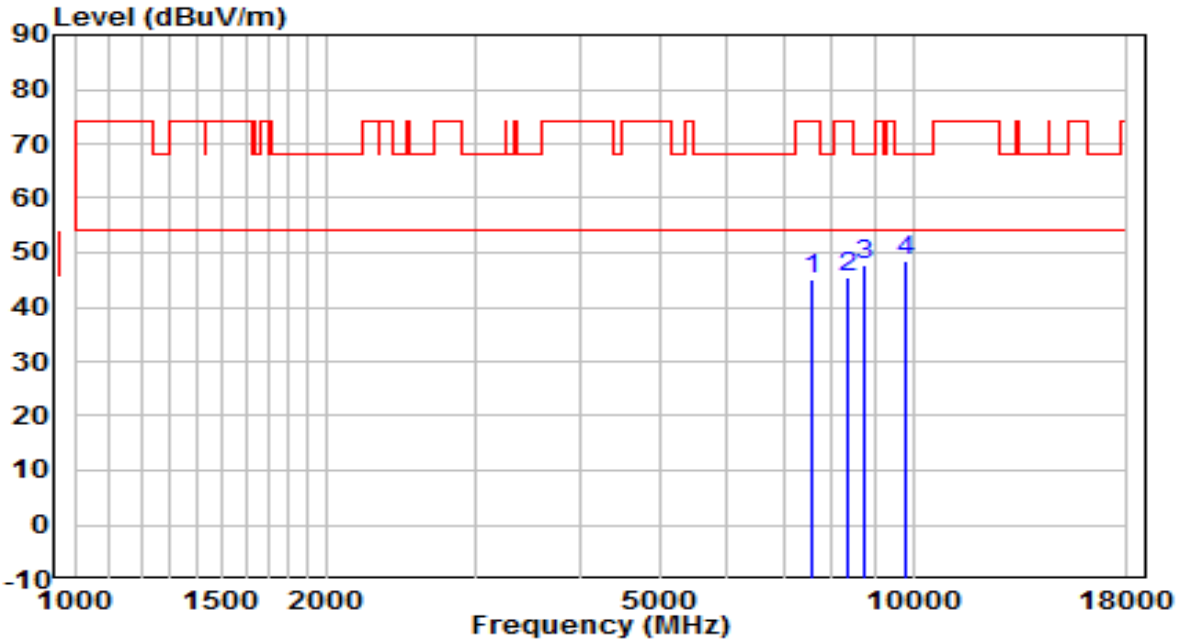


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7587.500	33.37	11.86	45.23	-28.77	74.00	Peak
2		8344.000	32.99	12.48	45.47	-28.53	74.00	Peak
3		8752.000	34.49	13.07	47.56	-20.64	68.20	Peak
4	*	9823.000	33.29	15.03	48.32	-19.88	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	110V/60Hz

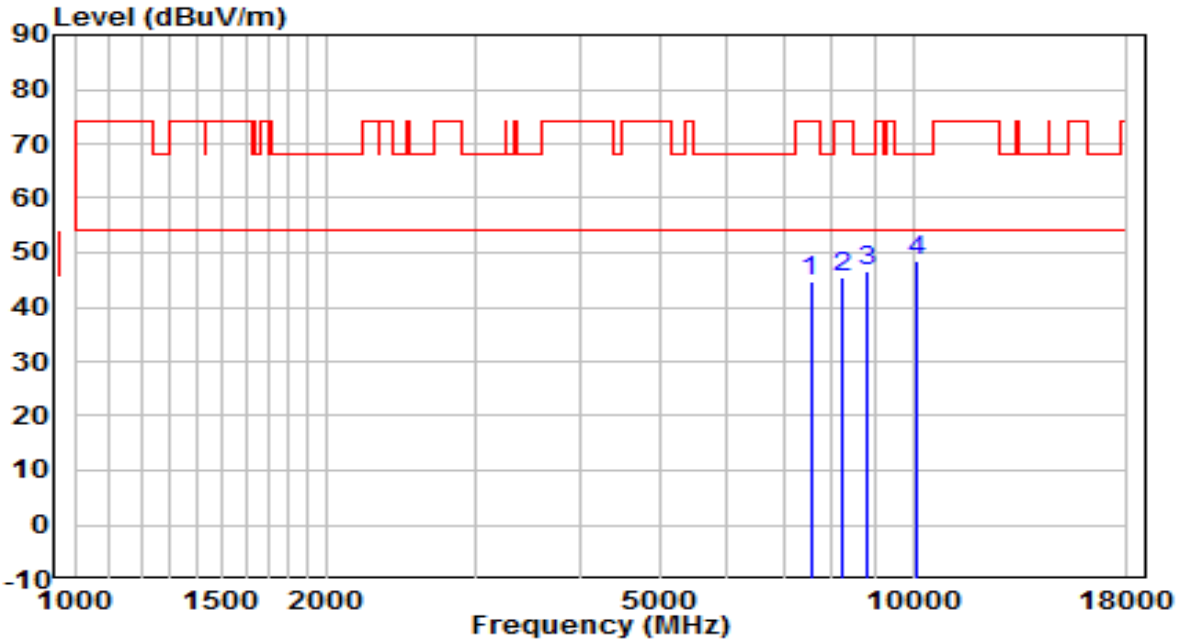


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7545.000	33.09	11.79	44.88	-29.12	74.00	Peak
2		8208.000	32.87	12.50	45.37	-28.63	74.00	Peak
3		8837.000	33.17	13.28	46.45	-21.75	68.20	Peak
4	*	10095.000	32.69	15.68	48.38	-19.82	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	110V/60Hz

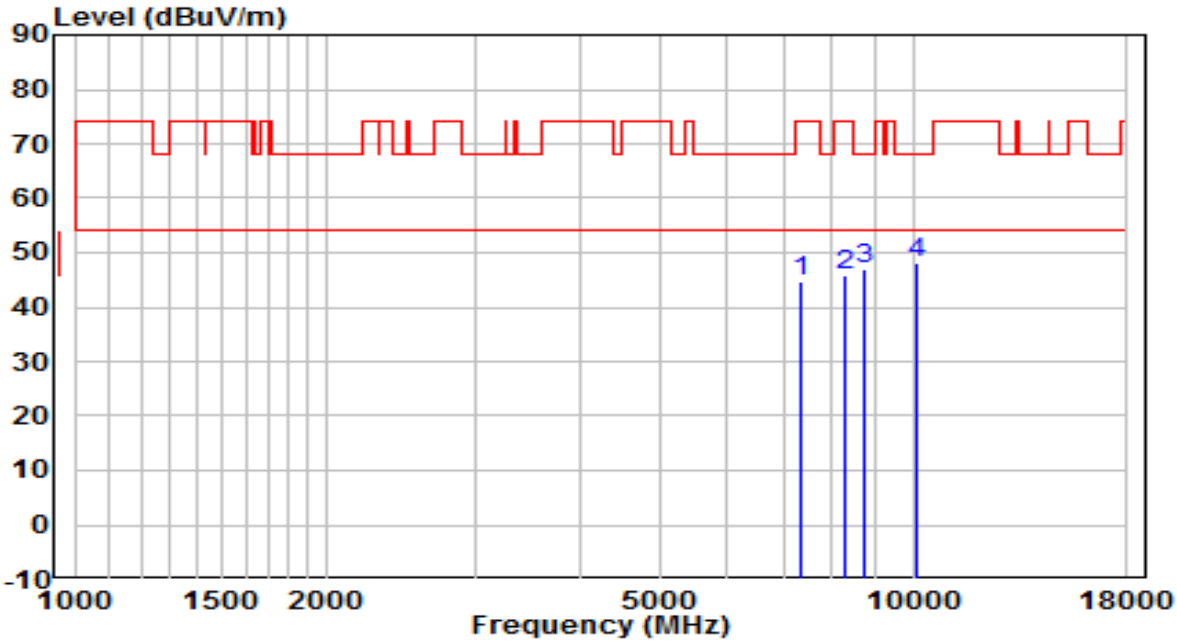


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7341.000	33.34	11.27	44.61	-29.39	74.00	Peak
2		8310.000	33.25	12.48	45.73	-28.27	74.00	Peak
3		8735.000	33.91	13.03	46.94	-21.26	68.20	Peak
4	*	10103.500	32.21	15.71	47.93	-20.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	110V/60Hz

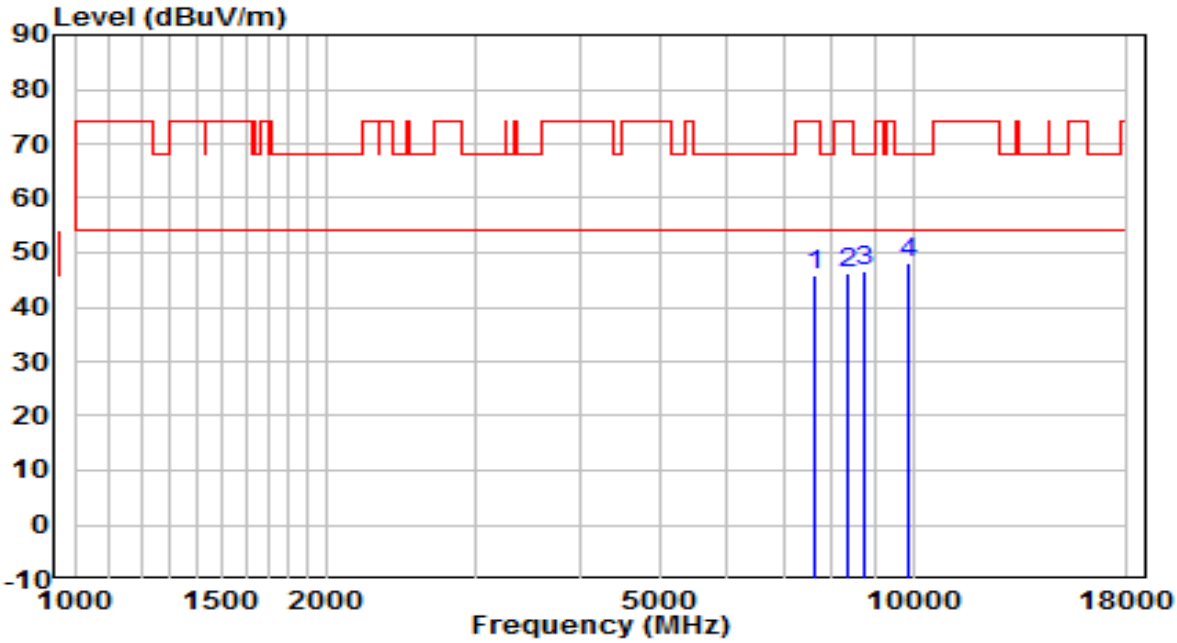


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7621.500	34.00	11.91	45.92	-28.08	74.00	Peak
2		8361.000	33.89	12.48	46.36	-27.64	74.00	Peak
3		8735.000	33.48	13.03	46.51	-21.69	68.20	Peak
4	*	9840.000	33.01	15.06	48.07	-20.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	110V/60Hz

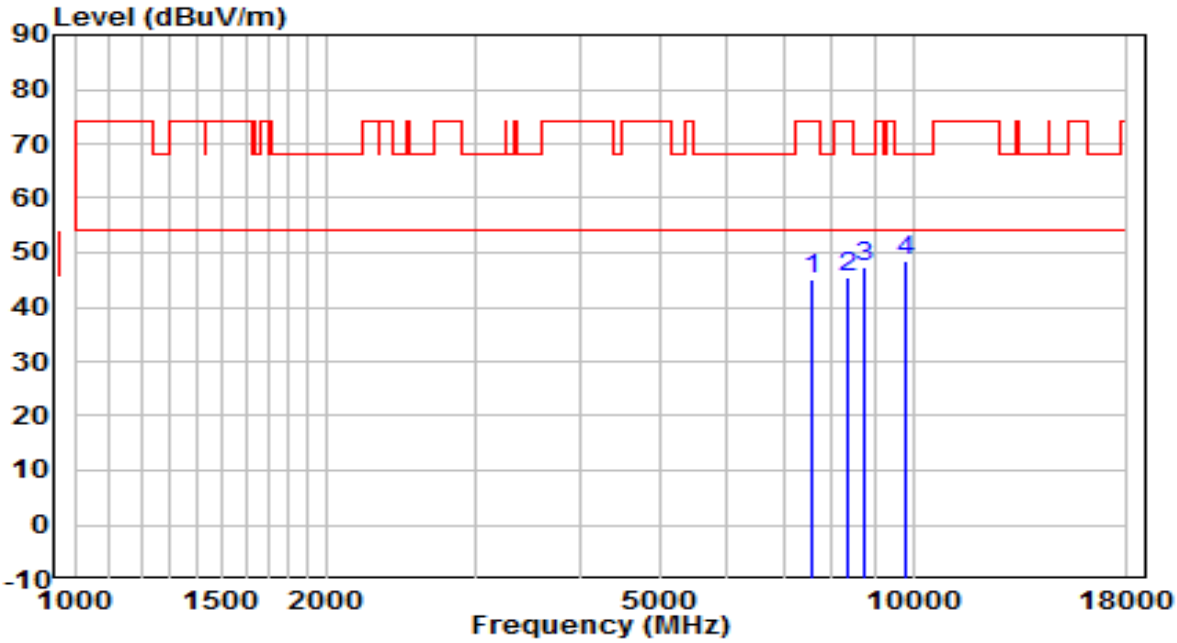


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7596.000	33.28	11.87	45.15	-28.85	74.00	Peak
2		8352.500	33.10	12.48	45.58	-28.42	74.00	Peak
3		8760.500	34.25	13.09	47.35	-20.85	68.20	Peak
4	*	9814.500	33.36	15.01	48.37	-19.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

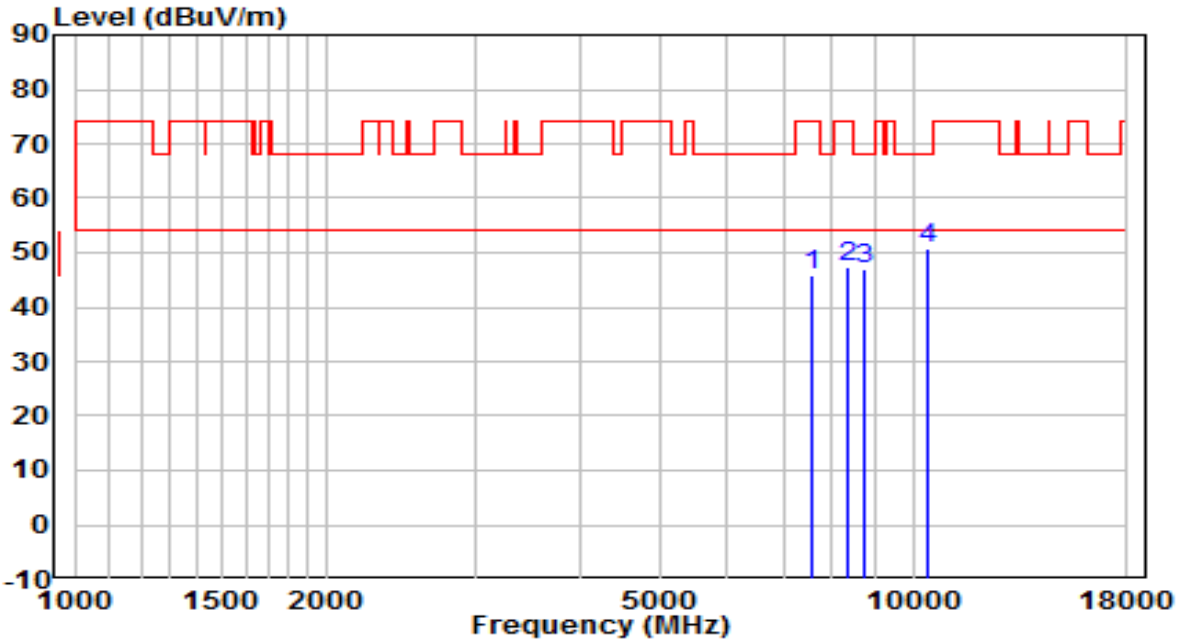


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7570.500	33.97	11.83	45.80	-28.20	74.00	Peak
2		8361.000	34.90	12.48	47.38	-26.62	74.00	Peak
3		8718.000	34.06	12.99	47.05	-21.15	68.20	Peak
4	*	10418.000	33.92	16.79	50.71	-17.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

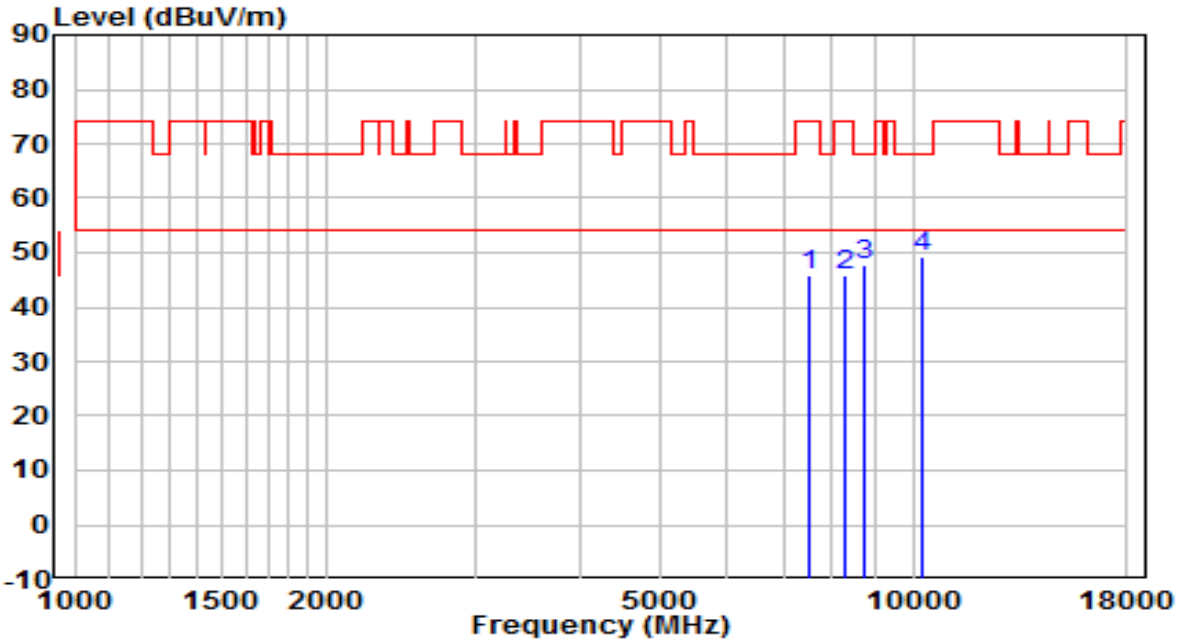


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7528.000	33.99	11.76	45.75	-28.25	74.00	Peak
2		8293.000	33.23	12.49	45.72	-28.28	74.00	Peak
3		8718.000	34.62	12.99	47.61	-20.59	68.20	Peak
4	*	10222.500	33.08	16.12	49.20	-19.00	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	110V/60Hz

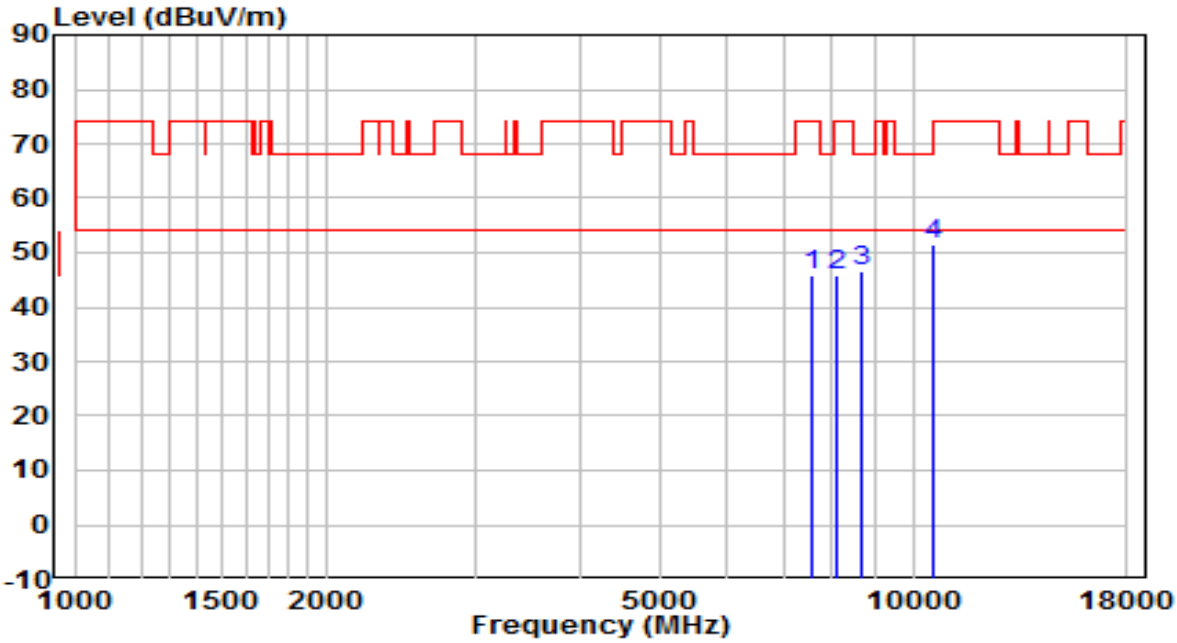


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7553.500	34.22	11.80	46.02	-27.98	74.00	Peak
2		8114.500	33.27	12.51	45.79	-28.21	74.00	Peak
3		8692.500	33.67	12.93	46.59	-21.61	68.20	Peak
4	*	10579.500	34.43	17.18	51.61	-16.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	110V/60Hz

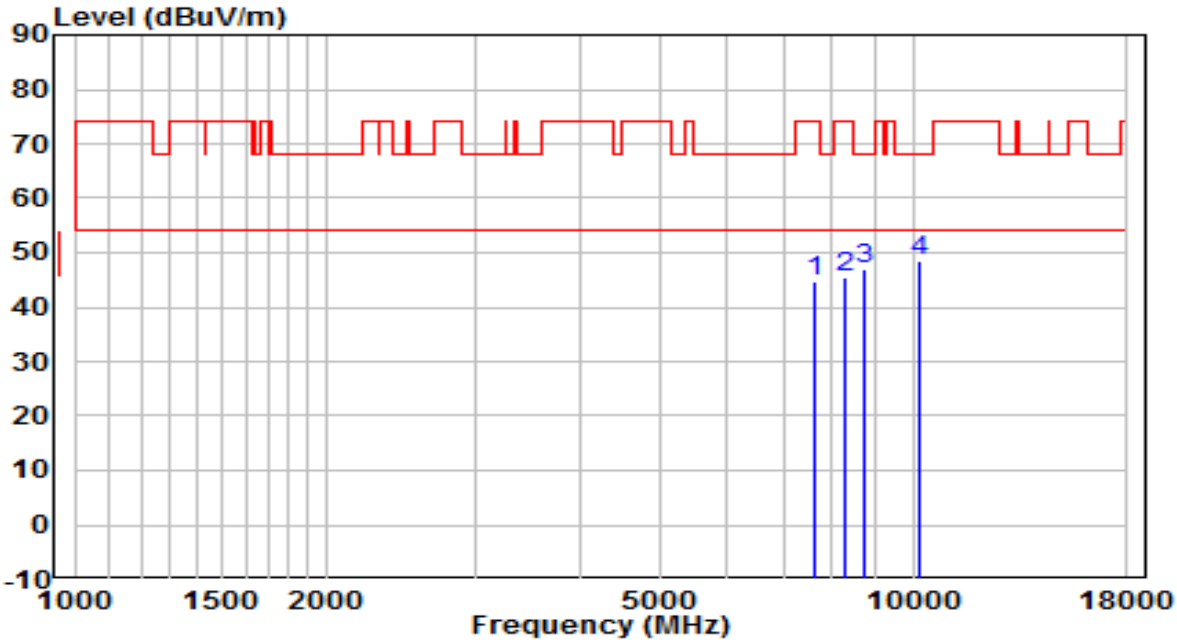


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7613.000	32.87	11.90	44.76	-29.24	74.00	Peak
2		8301.500	33.01	12.48	45.49	-28.51	74.00	Peak
3		8769.000	34.01	13.11	47.13	-21.07	68.20	Peak
4	*	10205.500	32.62	16.06	48.68	-19.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	110V/60Hz

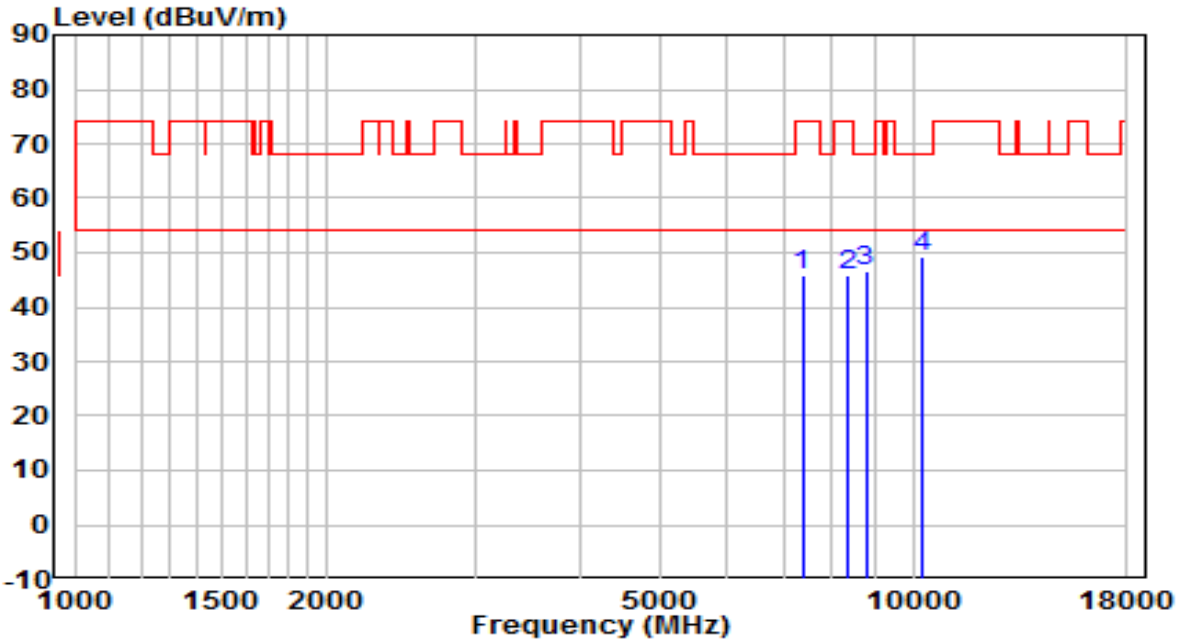


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7375.000	34.40	11.36	45.77	-28.23	74.00	Peak
2		8344.000	33.27	12.48	45.75	-28.25	74.00	Peak
3		8777.500	33.48	13.13	46.62	-21.58	68.20	Peak
4	*	10231.000	32.98	16.15	49.13	-19.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	110V/60Hz

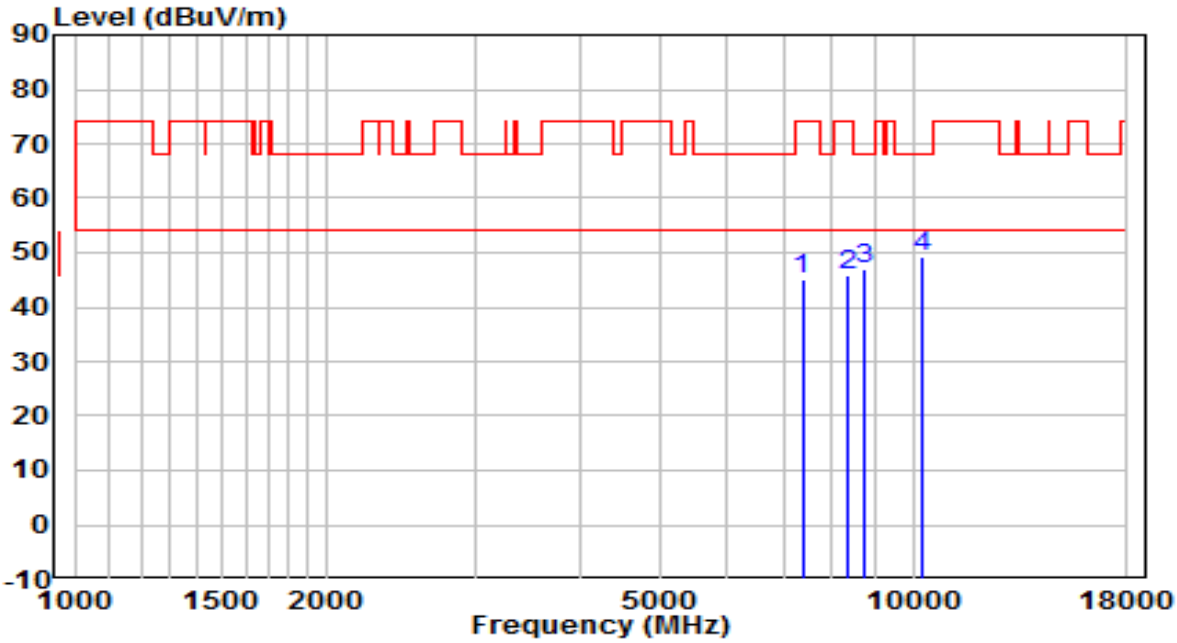


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7375.000	33.65	11.36	45.01	-28.99	74.00	Peak
2		8352.500	33.39	12.48	45.86	-28.14	74.00	Peak
3		8760.500	33.73	13.09	46.82	-21.38	68.20	Peak
4	*	10256.500	33.13	16.24	49.37	-18.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	110V/60Hz

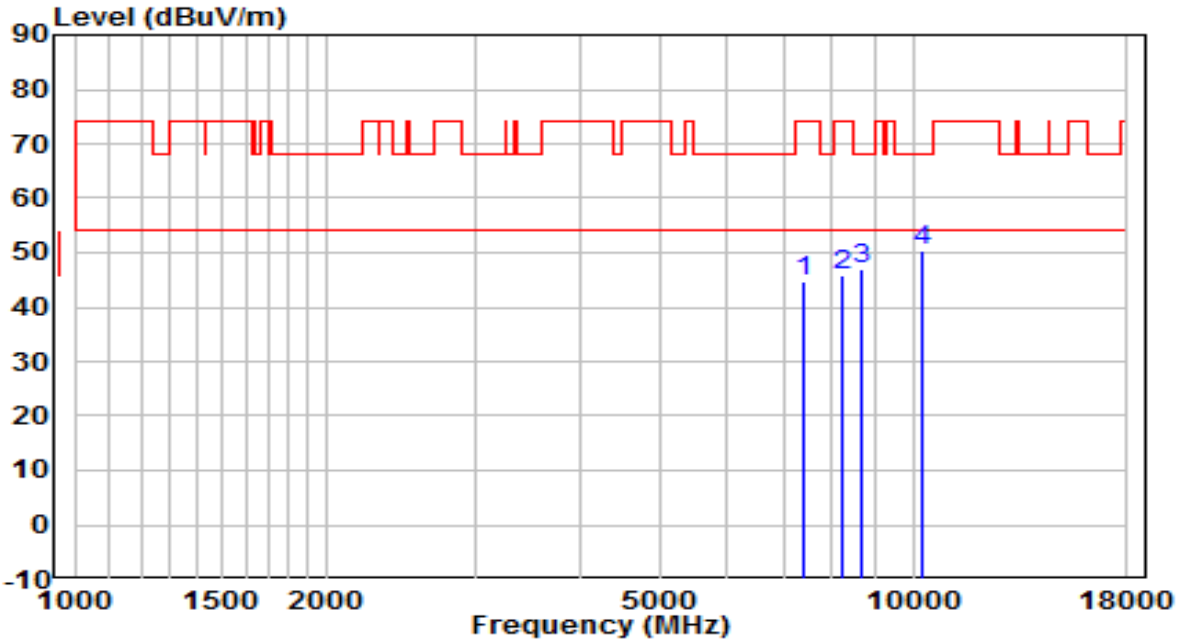


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7392.000	33.24	11.41	44.65	-29.35	74.00	Peak
2		8250.500	33.25	12.49	45.74	-28.26	74.00	Peak
3		8658.500	34.12	12.84	46.96	-21.24	68.20	Peak
4	*	10273.500	34.25	16.30	50.55	-17.65	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	110V/60Hz

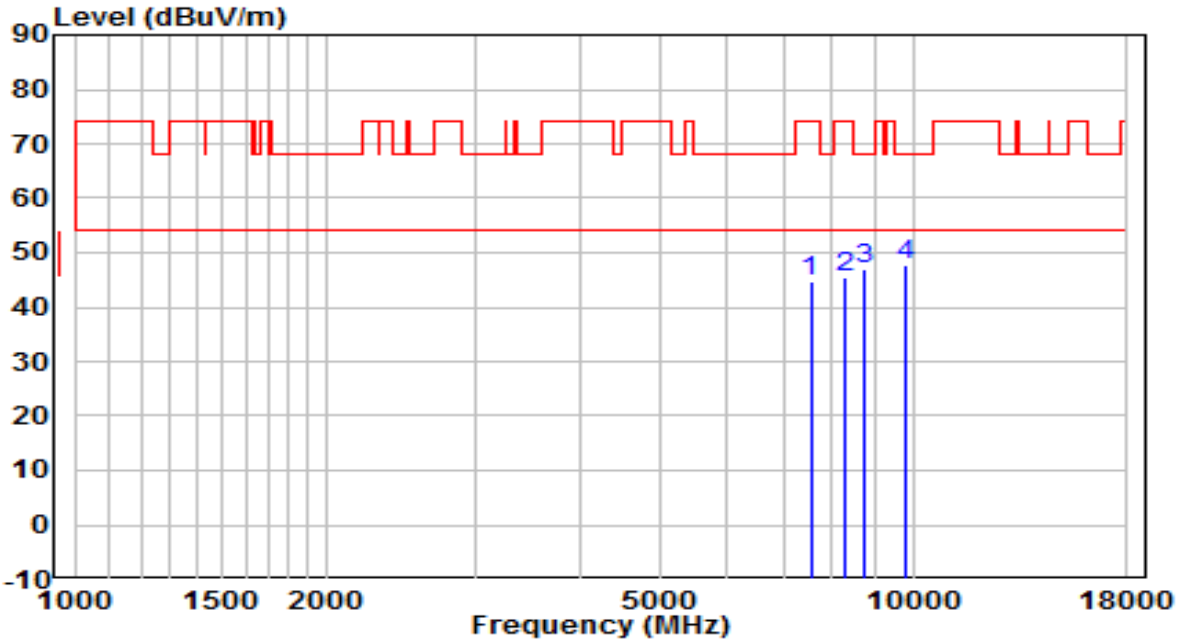


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7545.000	33.01	11.79	44.80	-29.20	74.00	Peak
2		8301.500	32.82	12.48	45.31	-28.69	74.00	Peak
3		8760.500	33.95	13.09	47.04	-21.16	68.20	Peak
4	*	9814.500	32.73	15.01	47.74	-20.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz	Test Voltage	110V/60Hz

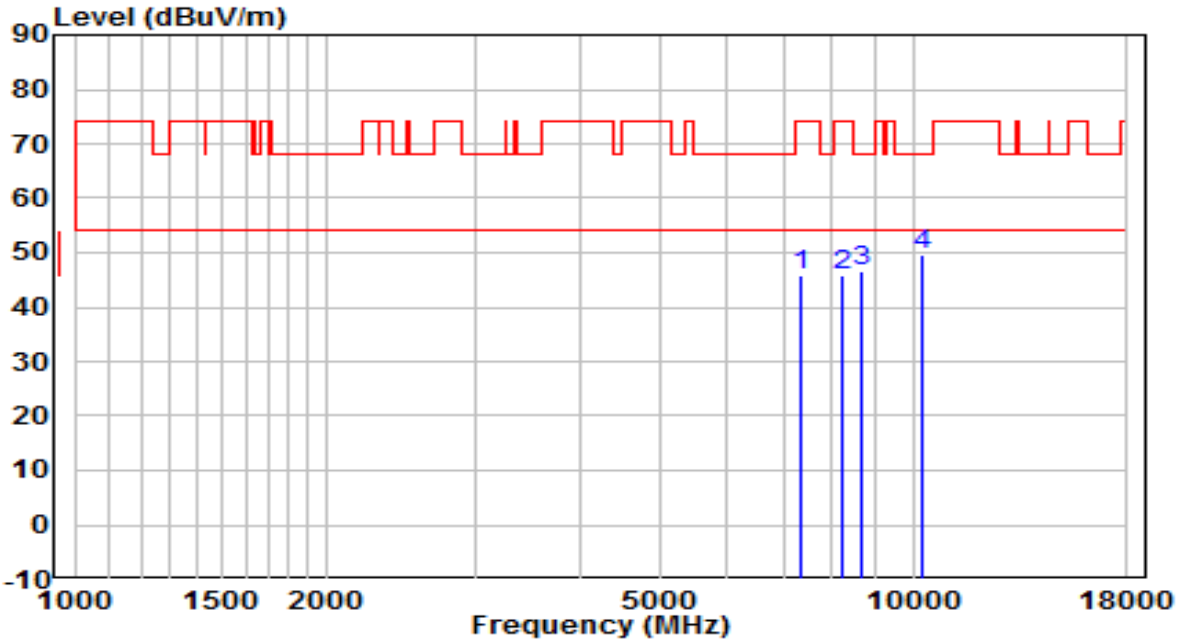


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7349.500	34.72	11.29	46.01	-27.99	74.00	Peak
2		8216.500	33.27	12.50	45.77	-28.23	74.00	Peak
3		8658.500	33.68	12.84	46.52	-21.68	68.20	Peak
4	*	10256.500	33.30	16.24	49.54	-18.66	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz	Test Voltage	110V/60Hz

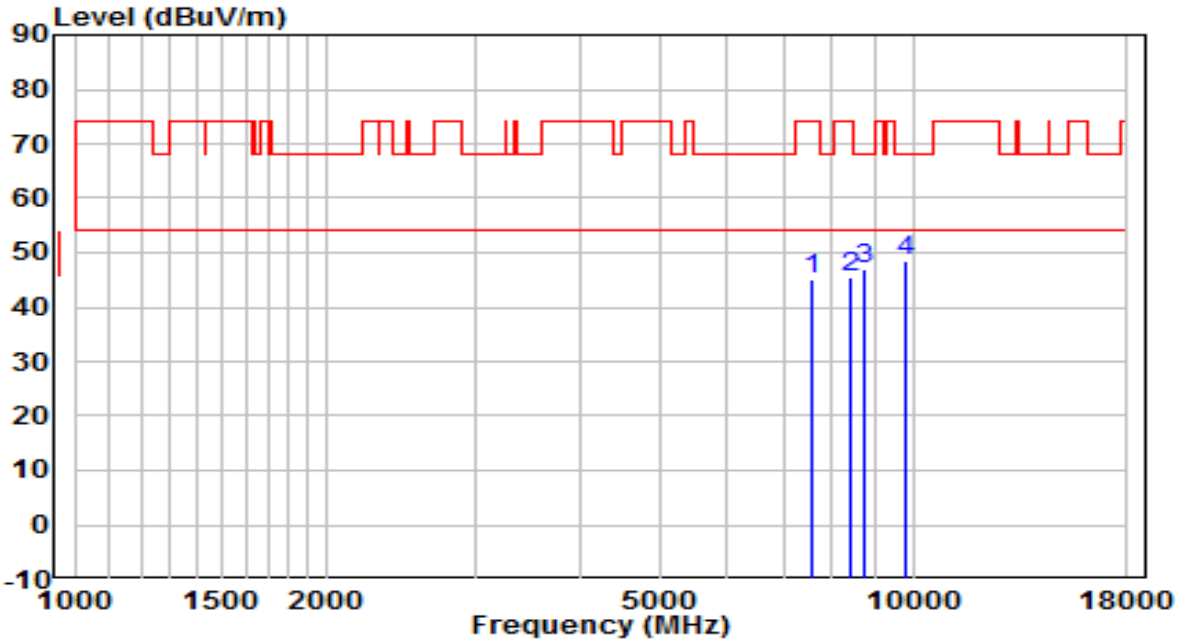


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7570.500	33.33	11.83	45.16	-28.84	74.00	Peak
2		8403.500	33.18	12.47	45.65	-28.35	74.00	Peak
3		8752.000	33.77	13.07	46.84	-21.36	68.20	Peak
4	*	9823.000	33.61	15.03	48.64	-19.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	110V/60Hz

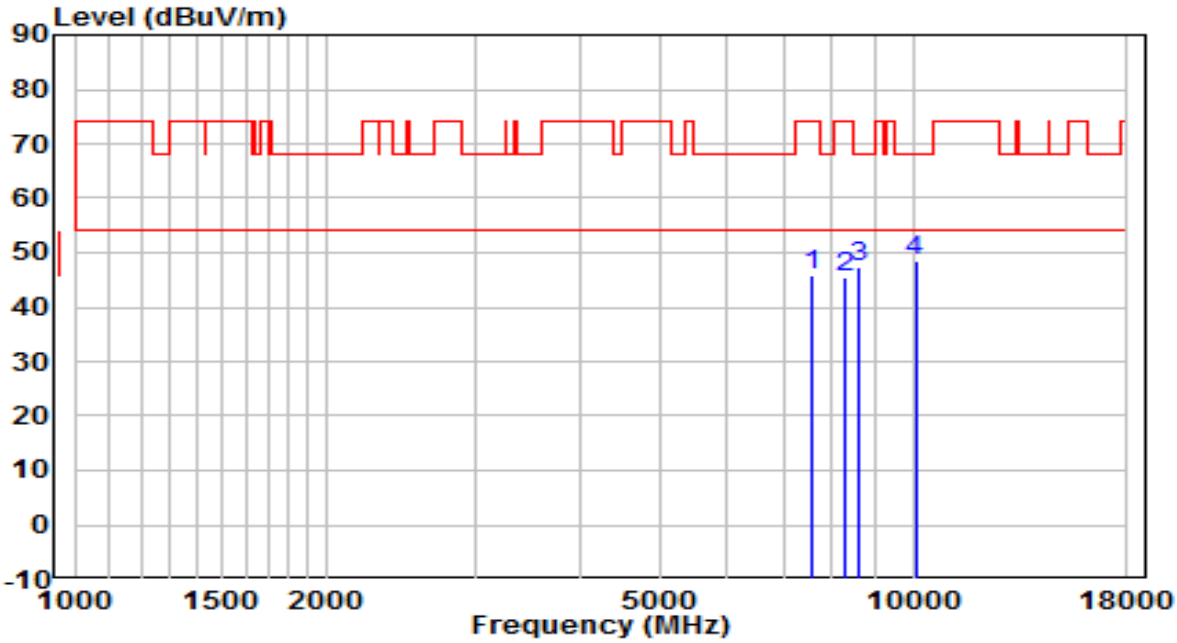


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7587.500	34.03	11.86	45.89	-28.11	74.00	Peak
2		8310.000	32.95	12.48	45.43	-28.57	74.00	Peak
3		8616.000	34.46	12.74	47.20	-21.00	68.20	Peak
4	*	10061.000	32.76	15.57	48.33	-19.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	110V/60Hz

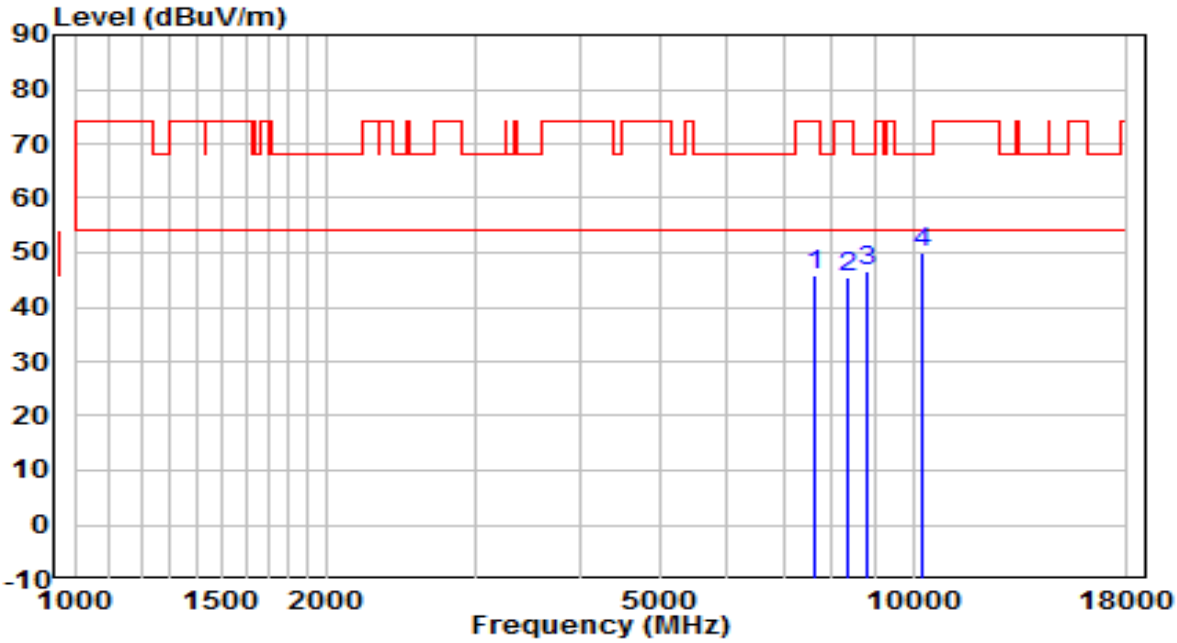


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		7604.500	33.81	11.89	45.69	-28.31	74.00	Peak
2		8327.000	33.09	12.48	45.58	-28.42	74.00	Peak
3		8786.000	33.63	13.16	46.79	-21.41	68.20	Peak
4	*	10282.000	33.74	16.32	50.06	-18.14	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

Type B Filter Configuration

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

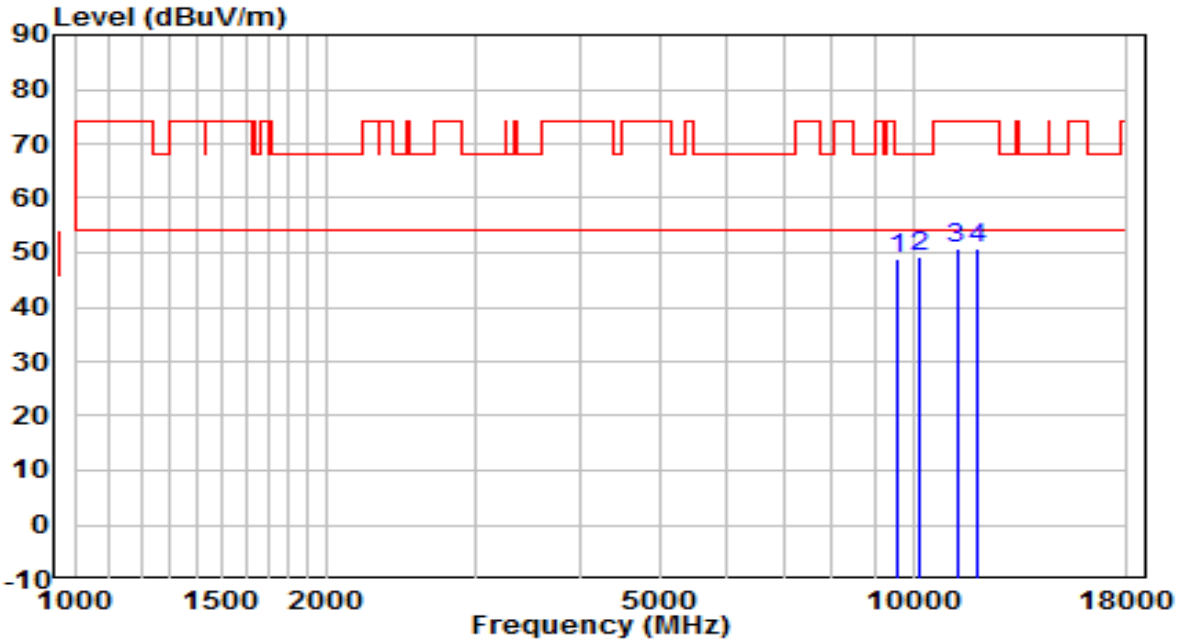


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9593.500	34.27	14.60	48.86	-19.34	68.20	Peak
2	*	10205.500	33.31	16.06	49.37	-18.83	68.20	Peak
3		11268.000	32.72	18.14	50.86	-23.14	74.00	Peak
4		11888.500	32.89	17.96	50.85	-23.15	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

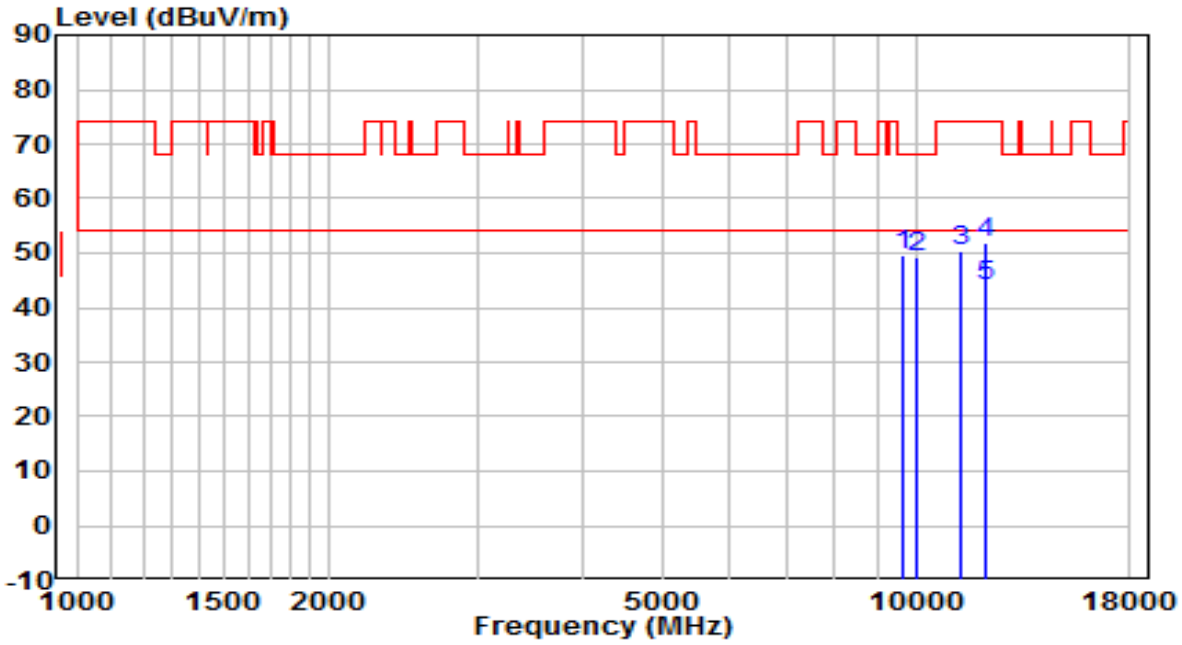


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9661.500	34.84	14.72	49.56	-18.64	68.20	Peak
2		10035.500	33.78	15.48	49.26	-18.94	68.20	Peak
3		11310.500	32.02	18.20	50.22	-23.78	74.00	Peak
4		12109.500	33.93	17.84	51.77	-22.23	74.00	Peak
5	*	12109.500	26.13	17.84	43.97	-10.03	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	110V/60Hz

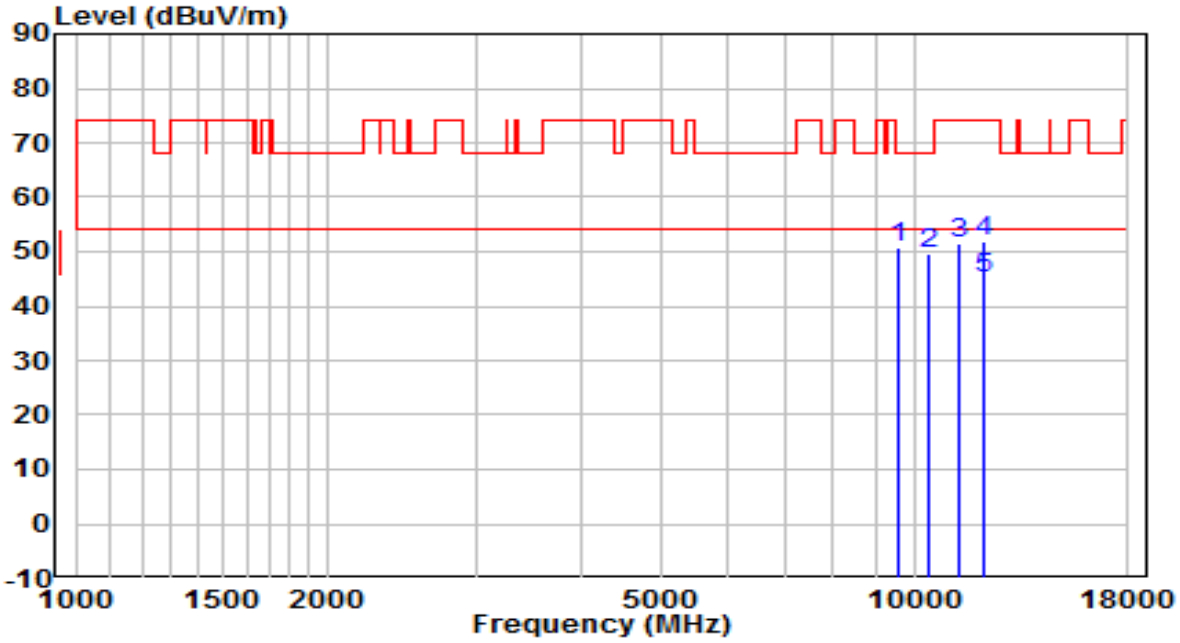


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9568.000	36.18	14.55	50.73	-17.47	68.20	Peak
2		10375.500	32.96	16.64	49.60	-18.60	68.20	Peak
3		11285.000	33.51	18.16	51.67	-22.33	74.00	Peak
4		12075.500	34.23	17.83	52.06	-21.94	74.00	Peak
5	*	12075.500	27.16	17.83	44.99	-9.01	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	110V/60Hz

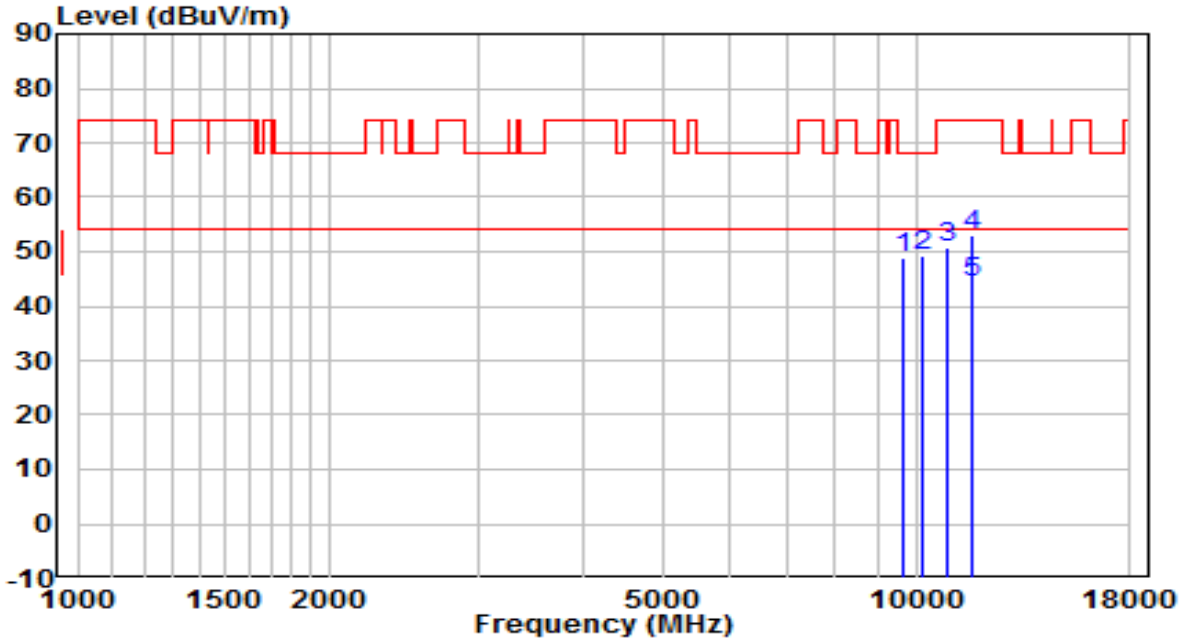

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9644.500	34.24	14.69	48.93	-19.27	68.20	Peak
2		10163.000	33.37	15.92	49.29	-18.91	68.20	Peak
3		10894.000	33.24	17.63	50.87	-23.13	74.00	Peak
4		11642.000	34.69	18.27	52.96	-21.04	74.00	Peak
5	*	11642.000	26.17	18.27	44.44	-9.56	54.00	Average

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

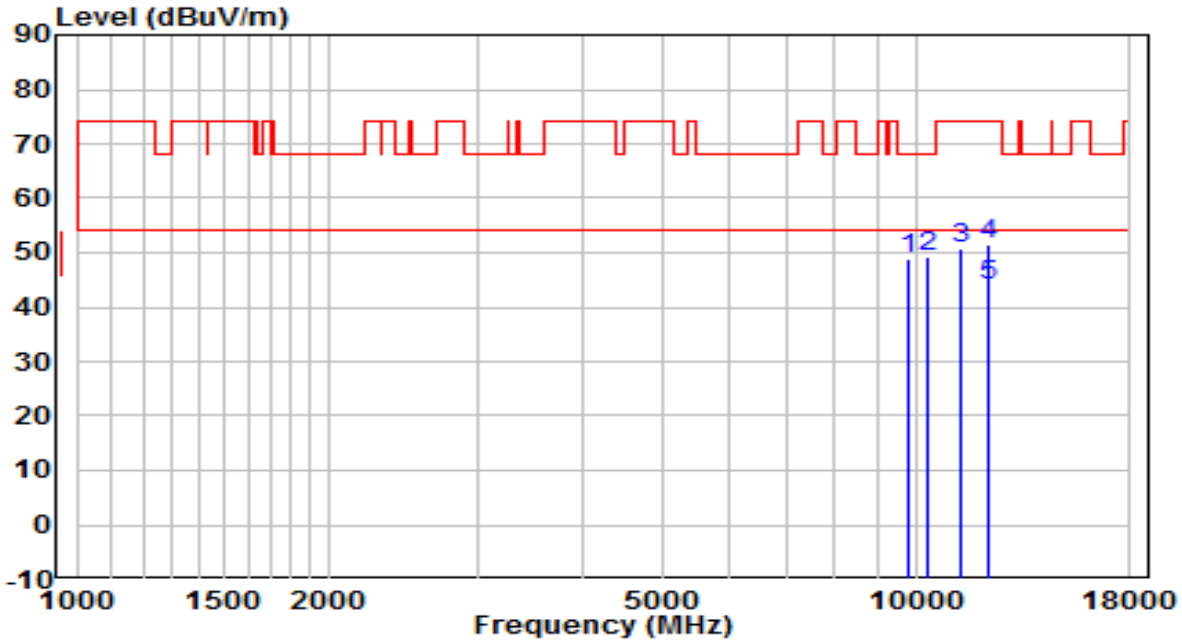


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9797.500	34.01	14.98	48.99	-19.21	68.20	Peak
2		10299.000	32.72	16.38	49.10	-19.10	68.20	Peak
3		11293.500	32.52	18.17	50.69	-23.31	74.00	Peak
4		12194.500	33.49	17.85	51.34	-22.66	74.00	Peak
5	*	12194.500	26.03	17.85	43.88	-10.12	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

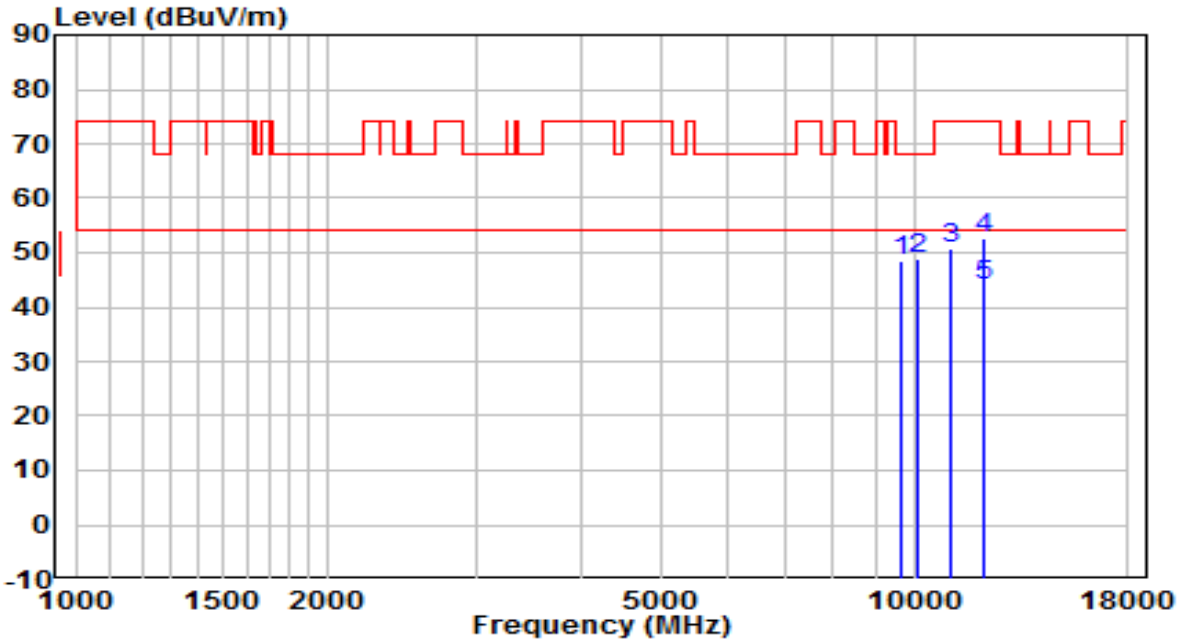


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9644.500	33.93	14.69	48.62	-19.58	68.20	Peak
2		10078.000	33.13	15.63	48.75	-19.45	68.20	Peak
3		11081.000	32.93	17.89	50.82	-23.18	74.00	Peak
4		12101.000	34.77	17.84	52.61	-21.39	74.00	Peak
5	*	12101.000	26.18	17.84	44.02	-9.98	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	110V/60Hz

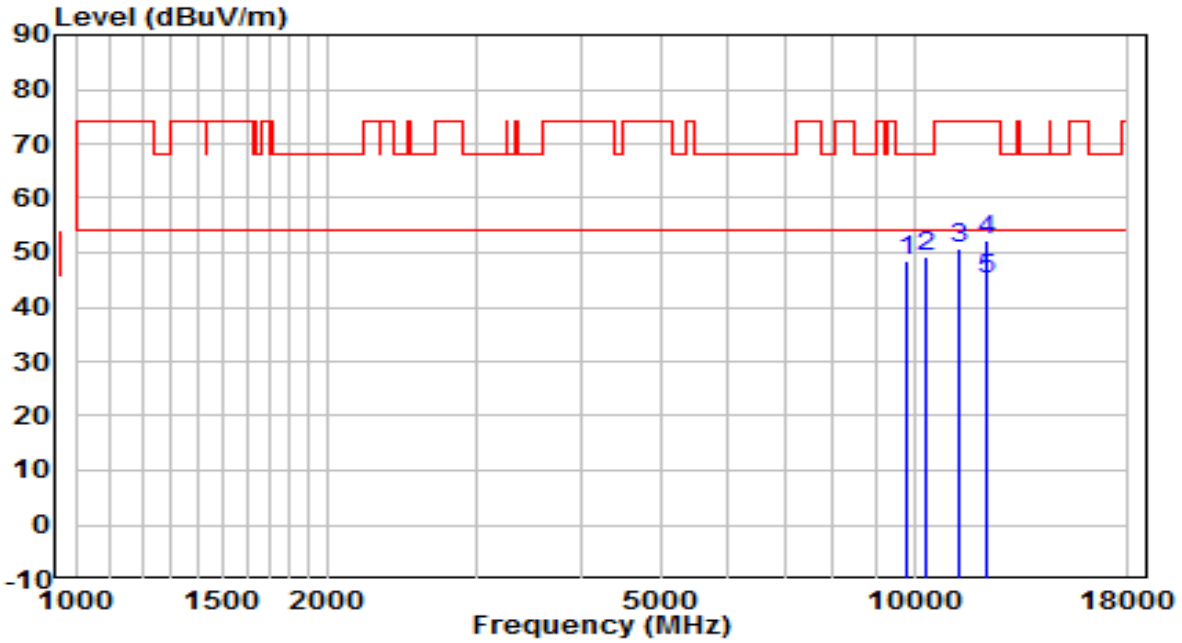


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9797.500	33.53	14.98	48.50	-19.70	68.20	Peak
2		10350.000	32.61	16.56	49.17	-19.03	68.20	Peak
3		11285.000	32.66	18.16	50.82	-23.18	74.00	Peak
4		12203.000	34.43	17.85	52.28	-21.72	74.00	Peak
5	*	12203.000	27.11	17.85	44.96	-9.04	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	110V/60Hz

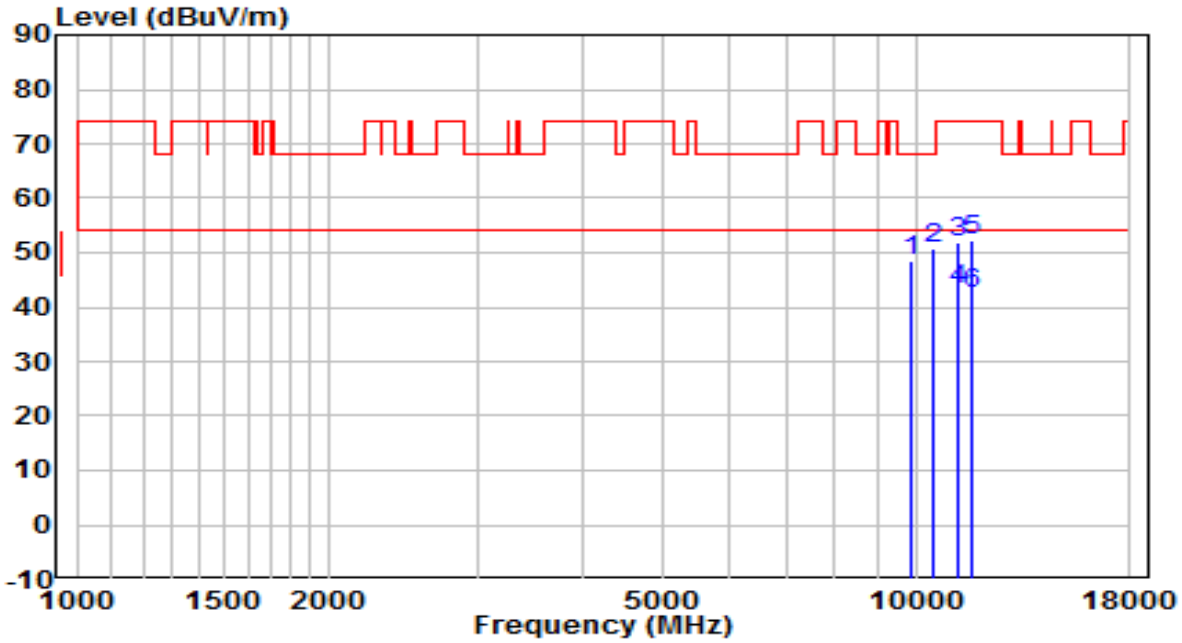


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9840.000	33.34	15.06	48.40	-19.80	68.20	Peak
2		10460.500	33.82	16.93	50.76	-17.44	68.20	Peak
3		11191.500	33.74	18.04	51.78	-22.22	74.00	Peak
4	*	11191.500	25.16	18.04	43.20	-10.80	54.00	Average
5		11642.000	33.93	18.27	52.20	-21.80	74.00	Peak
6		11642.000	24.11	18.27	42.38	-11.62	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	110V/60Hz

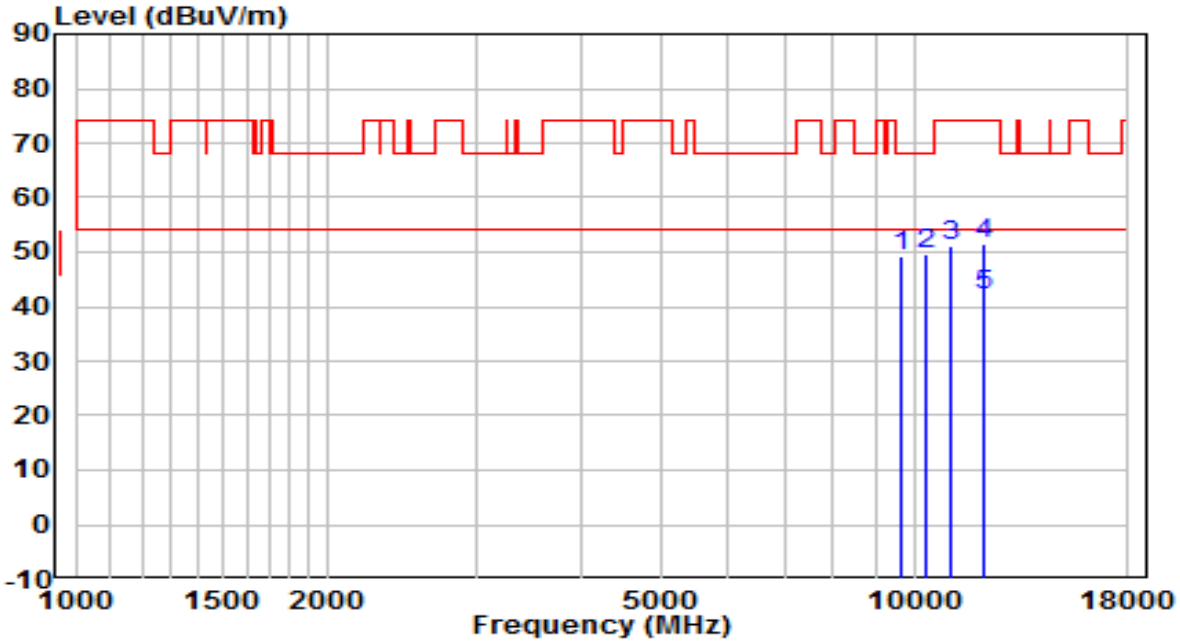

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9644.500	34.59	14.69	49.28	-18.92	68.20	Peak
2		10333.000	32.94	16.50	49.44	-18.76	68.20	Peak
3		11072.500	33.16	17.88	51.03	-22.97	74.00	Peak
4		12084.000	33.73	17.83	51.57	-22.43	74.00	Peak
5	*	12084.000	24.24	17.83	42.07	-11.93	54.00	Average

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	110V/60Hz

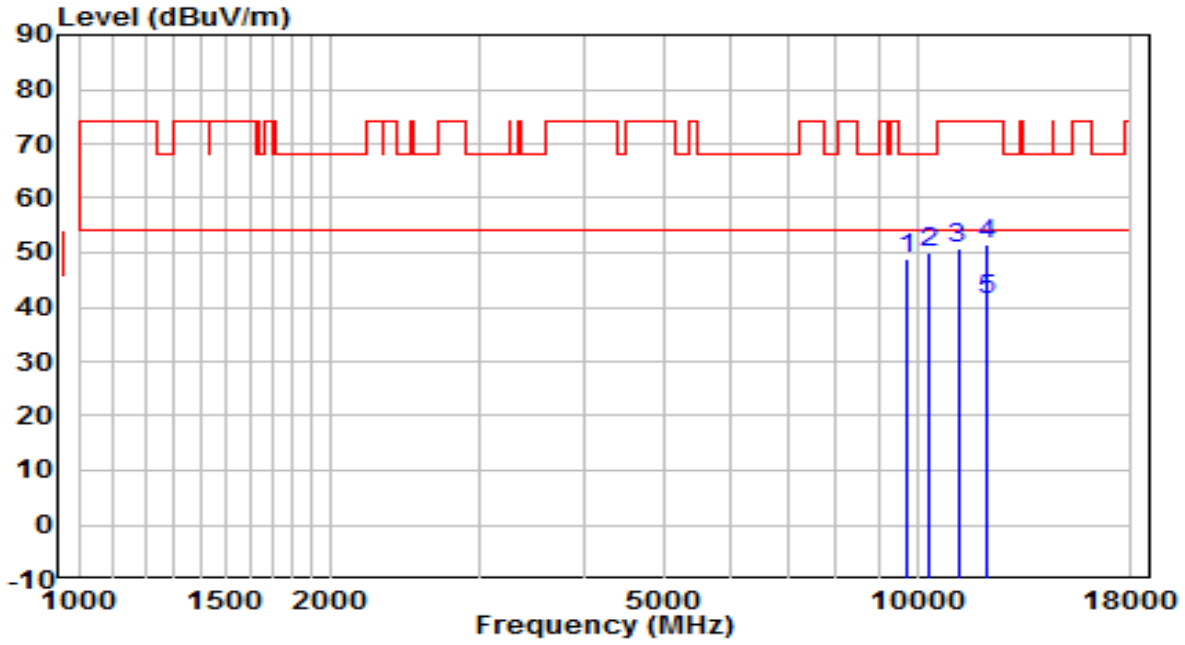


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9755.000	33.86	14.90	48.76	-19.44	68.20	Peak
2		10358.500	33.55	16.59	50.14	-18.06	68.20	Peak
3		11183.000	32.86	18.03	50.88	-23.12	74.00	Peak
4		12092.500	33.72	17.84	51.56	-22.44	74.00	Peak
5	*	12092.500	23.51	17.84	41.35	-12.65	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	110V/60Hz

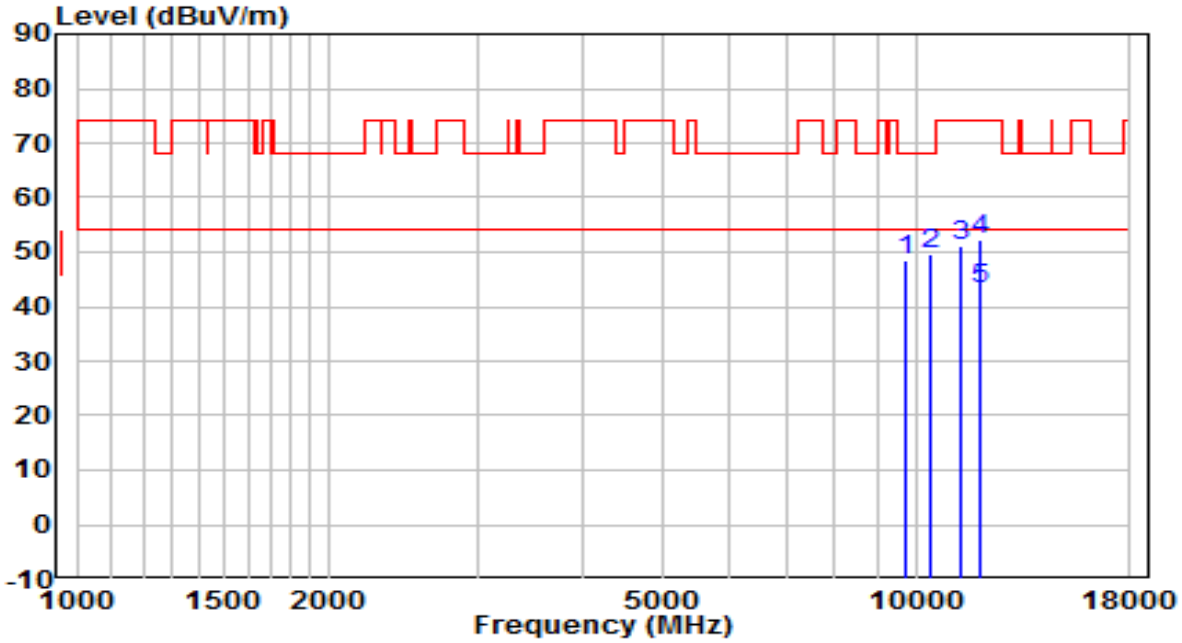

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9704.000	33.60	14.80	48.40	-19.80	68.20	Peak
2		10418.000	32.91	16.79	49.70	-18.50	68.20	Peak
3		11285.000	32.85	18.16	51.01	-22.99	74.00	Peak
4		11897.000	34.26	17.95	52.21	-21.79	74.00	Peak
5	*	11897.000	25.13	17.95	43.08	-10.92	54.00	Average

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	110V/60Hz

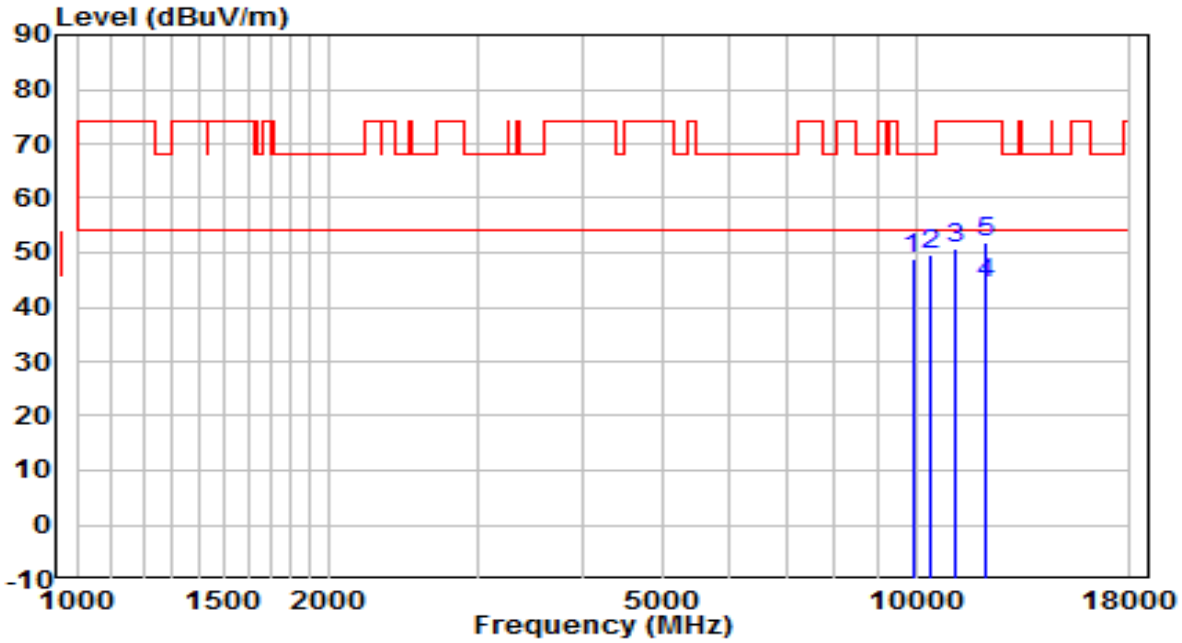


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9908.000	33.79	15.19	48.98	-19.22	68.20	Peak
2		10426.500	32.74	16.82	49.55	-18.65	68.20	Peak
3		11115.000	32.94	17.93	50.87	-23.13	74.00	Peak
4	*	12143.000	26.64	17.84	44.48	-9.52	54.00	Average
5		12143.500	34.09	17.84	51.93	-22.07	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

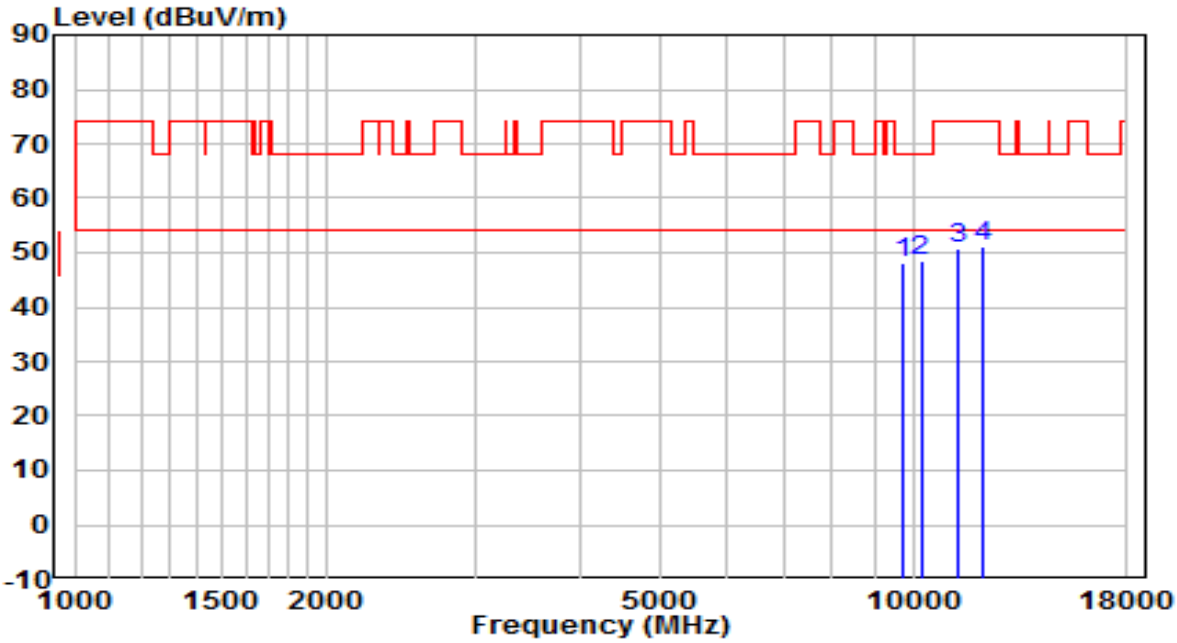


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9738.000	33.32	14.87	48.19	-20.01	68.20	Peak
2	*	10214.000	32.58	16.09	48.67	-19.53	68.20	Peak
3		11276.500	32.68	18.15	50.83	-23.17	74.00	Peak
4		12109.500	33.16	17.84	51.00	-23.00	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

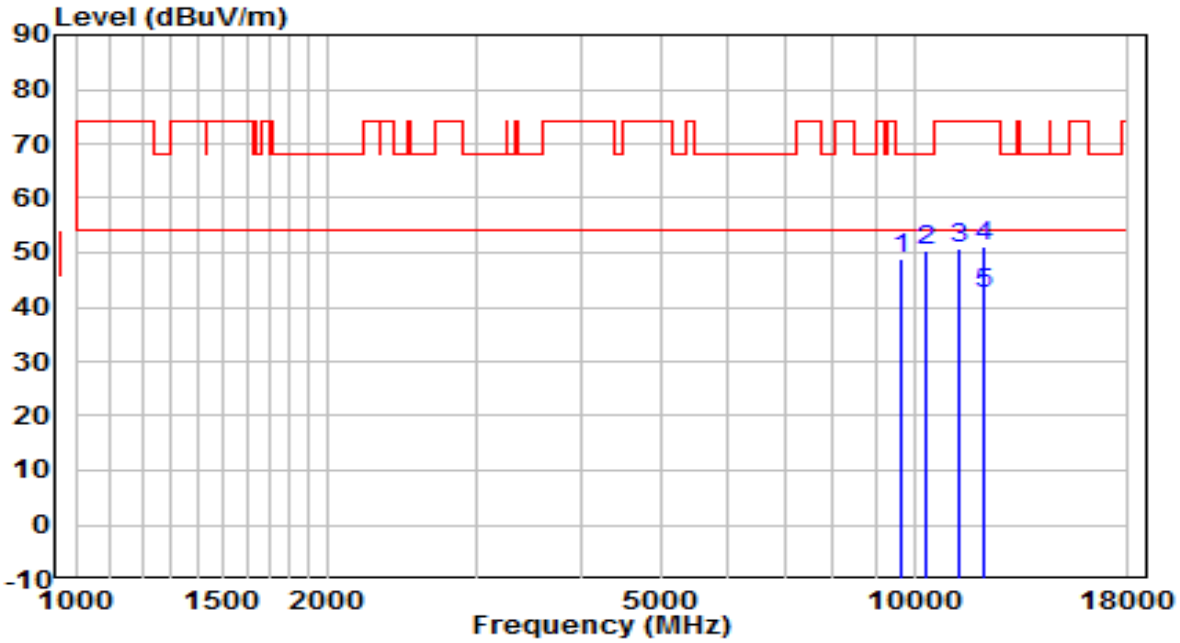


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9644.500	34.22	14.69	48.91	-19.29	68.20	Peak
2		10367.000	33.57	16.62	50.19	-18.01	68.20	Peak
3		11302.000	32.58	18.18	50.76	-23.24	74.00	Peak
4		12101.000	33.40	17.84	51.24	-22.76	74.00	Peak
5	*	12101.000	24.61	17.84	42.45	-11.55	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	110V/60Hz

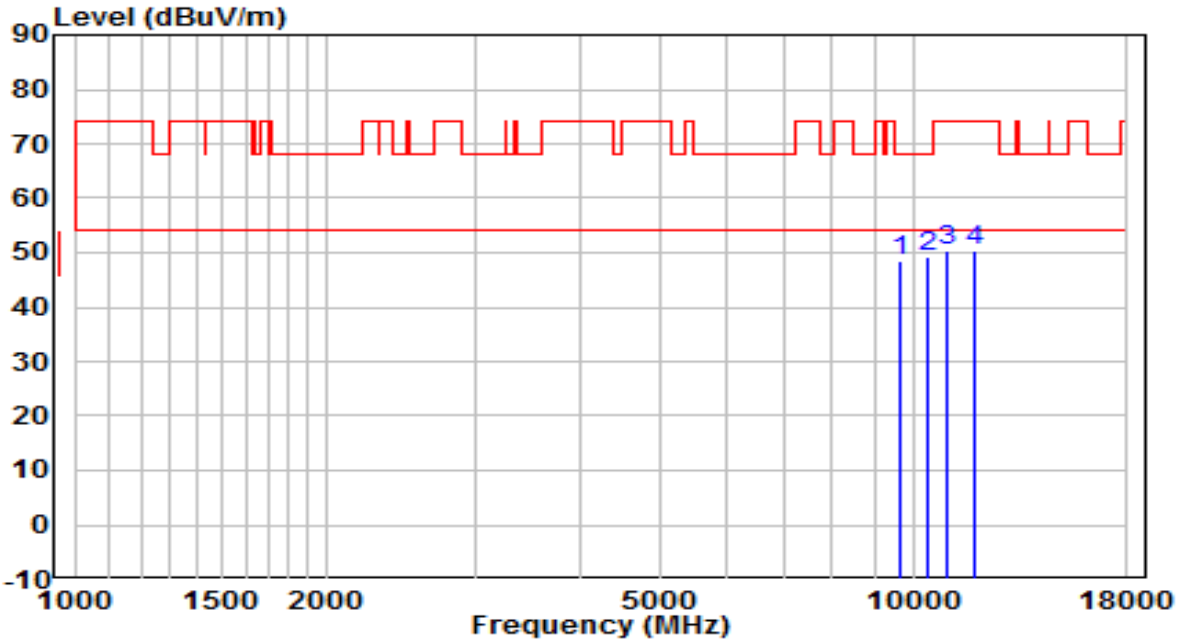


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9653.000	33.75	14.71	48.46	-19.74	68.20	Peak
2	*	10409.500	32.54	16.76	49.30	-18.90	68.20	Peak
3		10996.000	32.60	17.77	50.37	-23.63	74.00	Peak
4		11803.500	32.29	18.07	50.36	-23.64	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	110V/60Hz

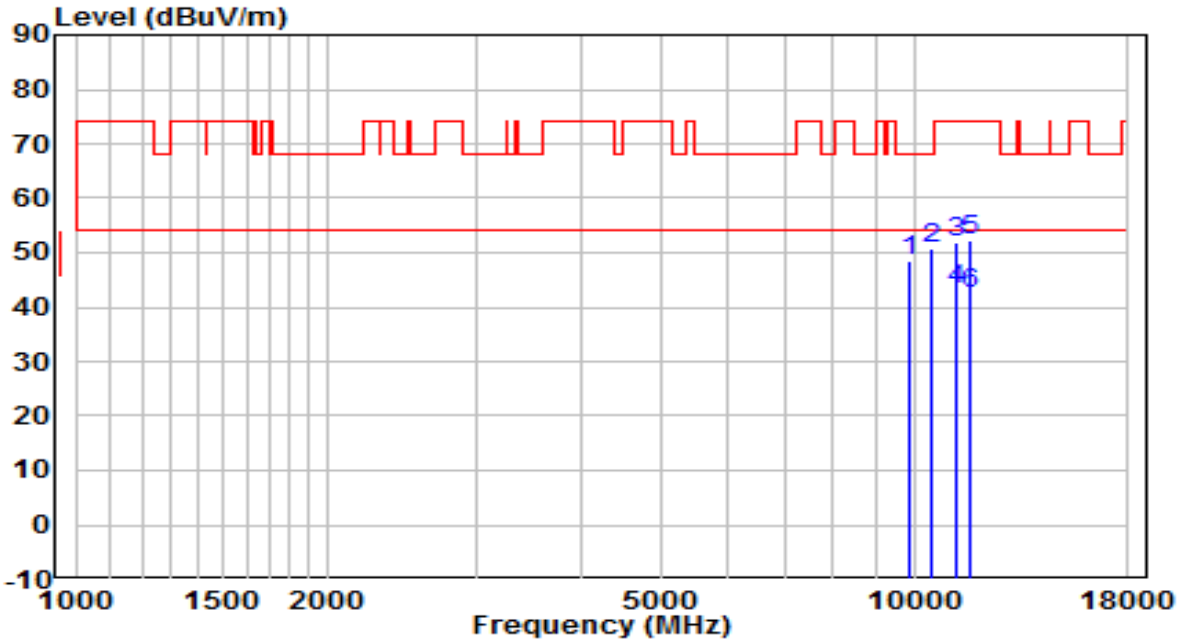


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		9840.000	33.34	15.06	48.40	-19.80	68.20	Peak
2		10460.500	33.82	16.93	50.76	-17.44	68.20	Peak
3		11191.500	33.74	18.04	51.78	-22.22	74.00	Peak
4	*	11191.500	25.16	18.04	43.20	-10.80	54.00	Average
5		11642.000	33.93	18.27	52.20	-21.80	74.00	Peak
6		11642.000	24.11	18.27	42.38	-11.62	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	24.1°C/44.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Receive by 802.11ax-HE20 at channel 5180MHz	Test Voltage	110V/60Hz

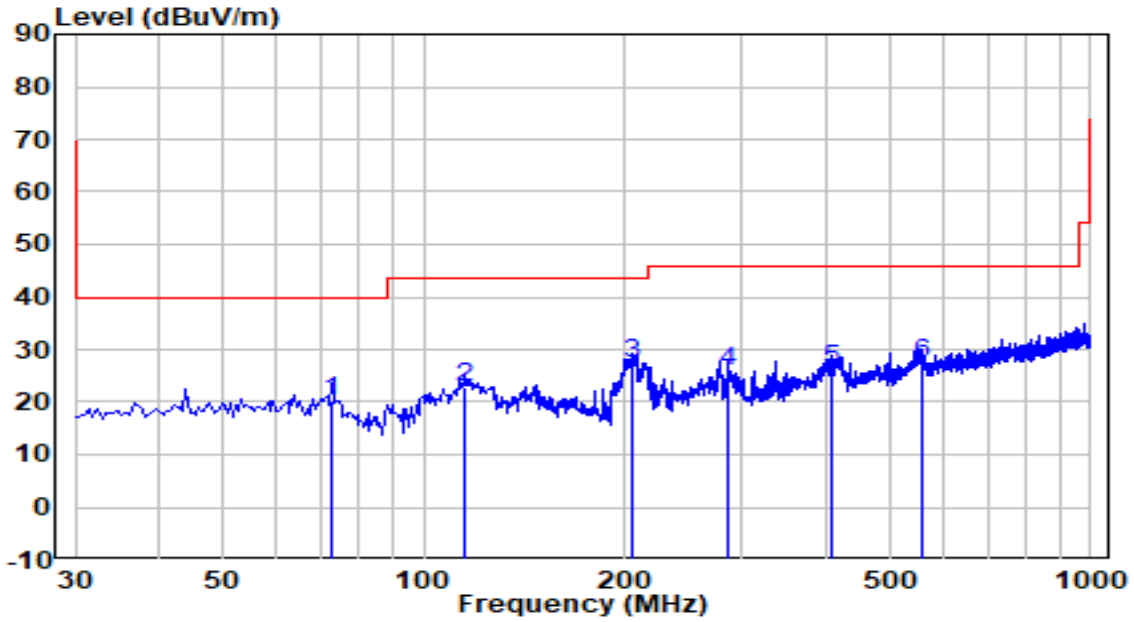


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		72.680	3.89	16.27	20.16	-19.84	40.00	QP
2		115.360	4.93	17.92	22.85	-20.65	43.50	QP
3	*	205.570	8.37	18.99	27.36	-16.14	43.50	QP
4		287.050	4.76	21.20	25.96	-20.04	46.00	QP
5		410.240	2.01	24.23	26.24	-19.76	46.00	QP
6		557.195	0.40	26.95	27.35	-18.65	46.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	24.1°C/44.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Receive by 802.11ax-HE20 at channel 5180MHz	Test Voltage	110V/60Hz

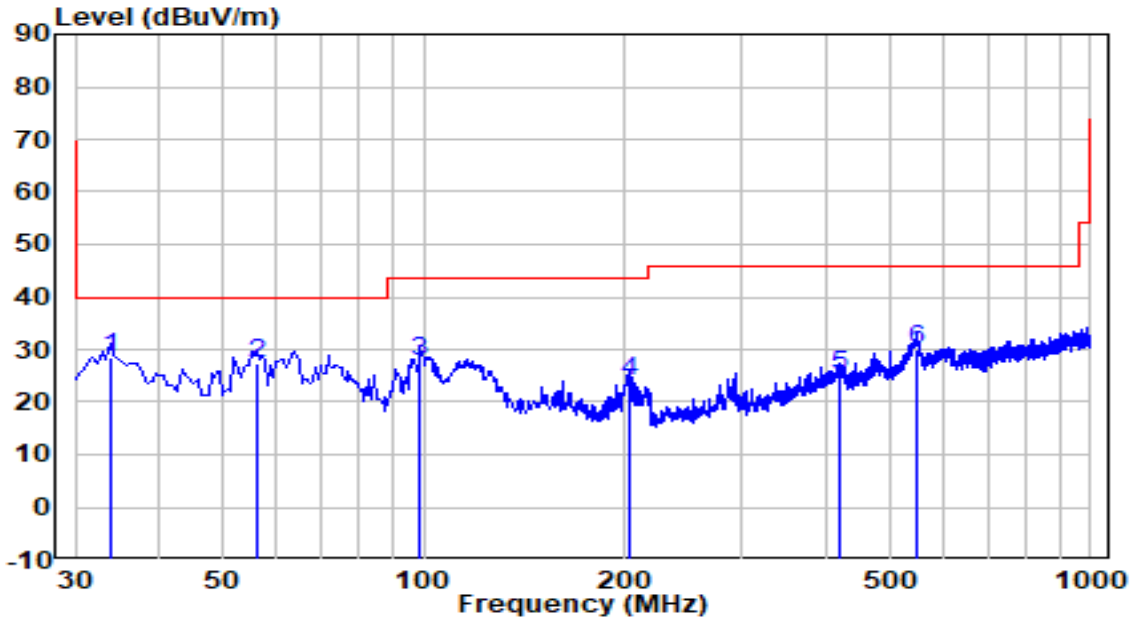


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	33.880	9.46	19.11	28.57	-11.43	40.00	QP
2		56.190	6.33	20.91	27.24	-12.76	40.00	QP
3		98.870	8.71	18.92	27.63	-15.87	43.50	QP
4		202.660	5.00	19.13	24.13	-19.37	43.50	QP
5		421.880	0.60	24.42	25.02	-20.98	46.00	QP
6		549.920	3.31	26.81	30.12	-15.88	46.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

The Result of Radiated Spurious Emission below 1GHz:

EUT	ACCESS POINT	Date of Test	2021-04-28
Factor	VULB 9162	Temp. / Humidity	23.0°C/50.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	110V/60Hz

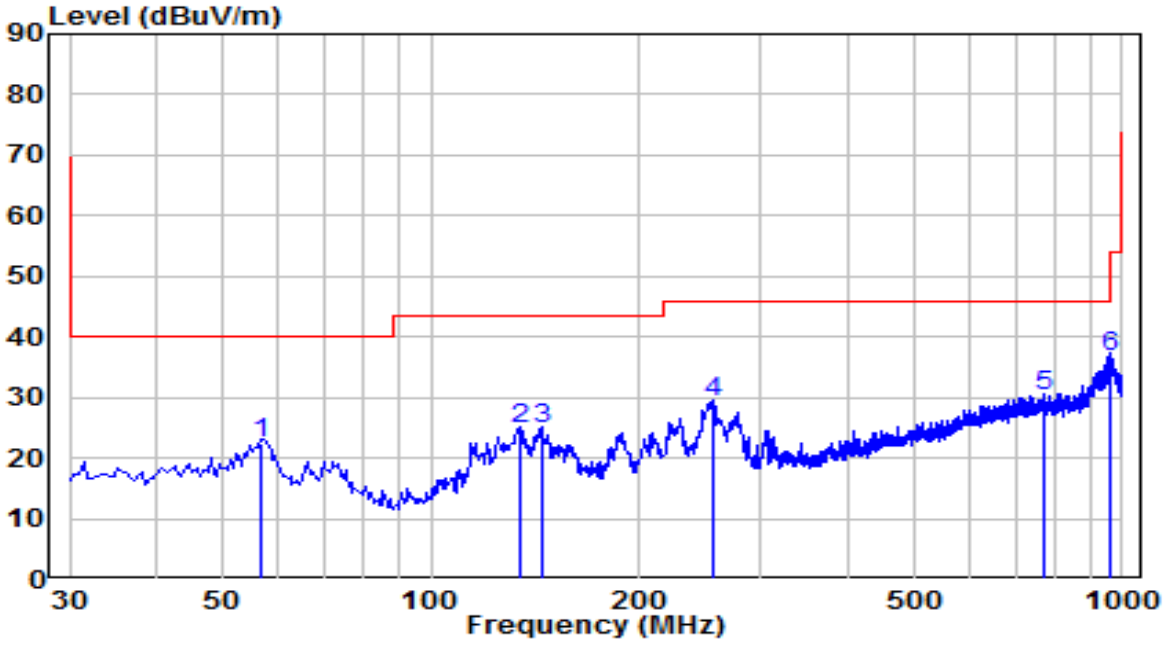


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		56.675	1.51	20.82	22.33	-17.67	40.00	QP
2		134.760	8.67	16.16	24.83	-18.67	43.50	QP
3		144.460	8.93	16.01	24.94	-18.56	43.50	QP
4		255.040	8.76	20.56	29.32	-16.68	46.00	QP
5	*	769.140	0.13	30.26	30.39	-15.61	46.00	QP
6		965.080	4.37	32.40	36.77	-17.23	54.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

EUT	ACCESS POINT	Date of Test	2021-04-28
Factor	VULB 9162	Temp. / Humidity	23.0°C/50.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	110V/60Hz

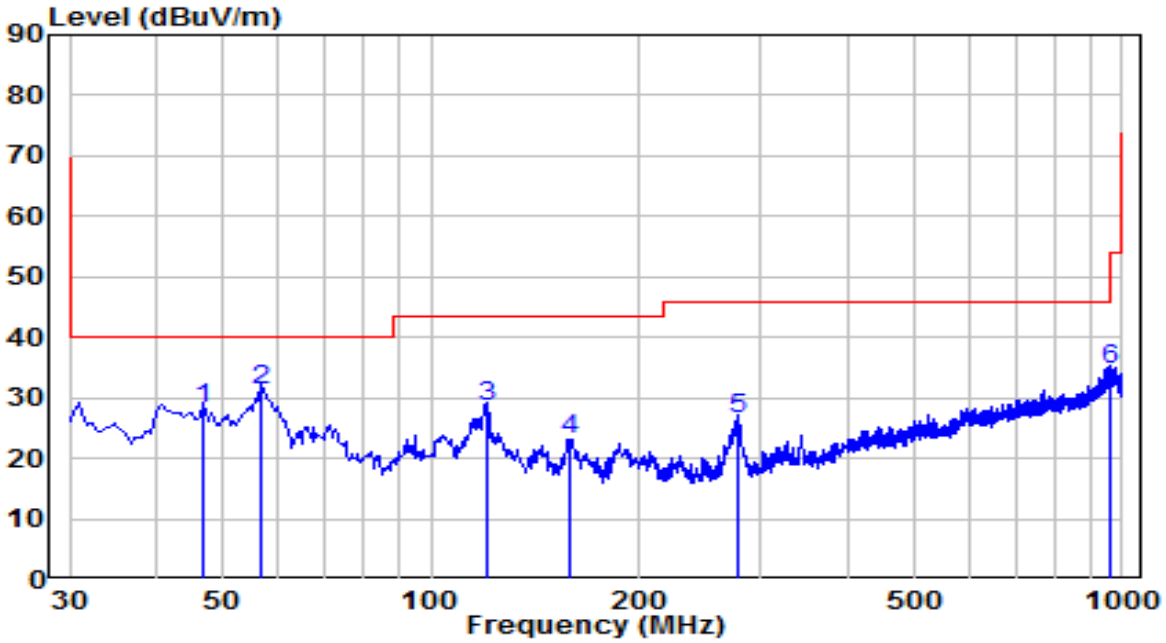


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		46.975	6.17	21.90	28.07	-11.93	40.00	QP
2		56.675	10.34	20.82	31.16	-8.84	40.00	QP
3		120.695	11.37	17.17	28.54	-14.96	43.50	QP
4		159.010	6.94	16.29	23.23	-20.27	43.50	QP
5		277.350	5.67	20.95	26.62	-19.38	46.00	QP
6		960.715	2.37	32.33	34.70	-19.30	54.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	24.1°C/44.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Receive by 802.11ax-HE20 at channel 5180MHz	Test Voltage	110V/60Hz

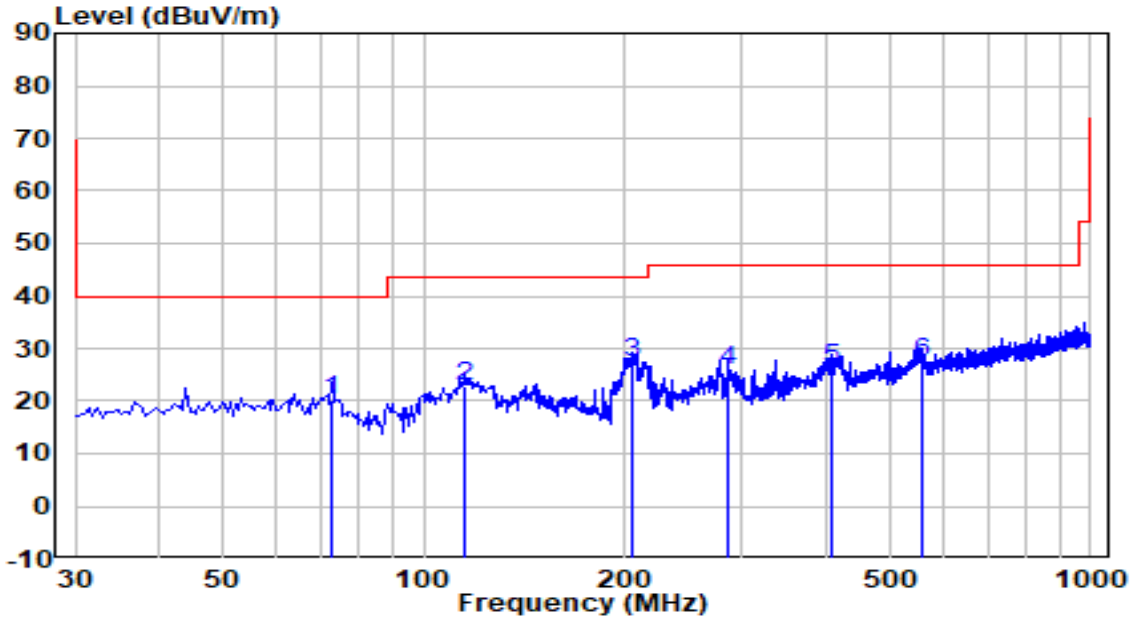


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		72.680	3.89	16.27	20.16	-19.84	40.00	QP
2		115.360	4.93	17.92	22.85	-20.65	43.50	QP
3	*	205.570	8.37	18.99	27.36	-16.14	43.50	QP
4		287.050	4.76	21.20	25.96	-20.04	46.00	QP
5		410.240	2.01	24.23	26.24	-19.76	46.00	QP
6		557.195	0.40	26.95	27.35	-18.65	46.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	24.1°C/44.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Receive by 802.11ax-HE20 at channel 5180MHz	Test Voltage	110V/60Hz

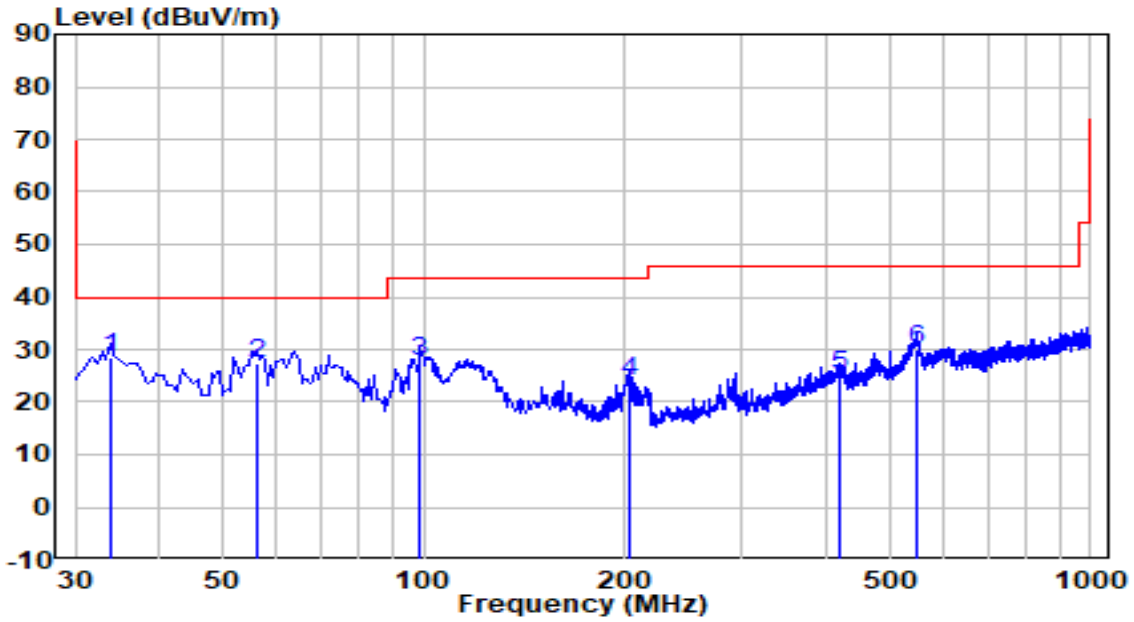

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	33.880	9.46	19.11	28.57	-11.43	40.00	QP
2		56.190	6.33	20.91	27.24	-12.76	40.00	QP
3		98.870	8.71	18.92	27.63	-15.87	43.50	QP
4		202.660	5.00	19.13	24.13	-19.37	43.50	QP
5		421.880	0.60	24.42	25.02	-20.98	46.00	QP
6		549.920	3.31	26.81	30.12	-15.88	46.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

5.5 頻帶邊緣

5.5.1 量測方法

待測物置於非導體桌面（落地型產品置於地上），受測物使用交流電源時，將其與任何配件設備之電源線連接至位於旋轉桌的交流電源。受測物使用電池時，測試時應裝置新電池或充電完全的電池。受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可360度旋轉，接收天線置於距待測物3m距離，高度可在1至4公尺間變動，以量測待測物之最大輻射電場強，接收天線並應於水平及垂直極化方向各量測一次。(待測物擺設方式根據 ANSI C63.10-2013版，待測物放置桌中心，1G以下擺設高度為80cm/1G以上擺設高度為150cm)

(1) 任一頻率小於或等於1000 MHz 之訊號,使用CISPR準峰值檢波器
(2) 任一頻率大於1000 MHz 之訊號，使用平均值檢波器測量，當規定之發射限制值為平均值時(含1000 MHz 以下)，受測訊號藉由峰值檢波器(RBW:1MHz,VBW:3MHz)所測量之峰值，亦須符合峰值發射限制值，其峰值發射限制值為最大容許平均值加20 dB。

備註: 若為手持式或穿戴式之裝置，需對其三個正交軸的方位評估測試，並記錄最差的數值。


5.5.2 限制要求

除低功率射頻器材技術規範另有規定外，任何低功率射頻器材之主波皆不得使用下表所列各頻段之頻率低功率射頻器材落於下表所列頻帶內之混附發射，其電場強度必須符合低功率射頻器材技術規範之第3.6節限制規定


頻　率(MHz)	頻　率(MHz)	頻　率(MHz)	頻　率(MHz)	頻　率(MHz)
0.090～0.110	25.500～25.700	703.00～748.00	2310.0～2390.0	13250～13400
0.490～0.510	37.475～38.275	758.00～803.00	2483.5～2900.0	14470～14500
2.172～2.198	73.500～75.400	825.00～915.00	3260.0～3267.0	15350～16200
3.013～3.033	108.00～138.00	930.00～1240.0	3332.0～3339.0	17700～21400
4.115～4.198	149.90～150.05	1300.0～1427.0	3345.8～3358.0	22010～23120
5.670～5.690	156.70～156.90	1435.0～1626.5	3500.0～4400.0	23600～24000
6.200～6.300	162.01～167.17	1660.0～1785.0	4500.0～5250.0	31200～31800
8.230～8.400	167.72～173.20	1805.0～1880.0	5350.0～5460.0	36430～36500
12.265～12.600	240.00～285.00	1885.0～1900.0	7250.0～7750.0	38600 以上
13.340～13.430	322.00～335.40	1905.0～1985.0	8025.0～8500.0	
14.965～15.020	399.90～410.00	2010.0～2025.0	9000.0～9200.0	
16.700～16.755	485.00～510.00	2110.0～2170.0	9300.0～9500.0	
19.965～20.020	608.00～614.00	2200.0～2300.0	10600～12700	

5.5.3 測試架構圖


Under 30MHz Test

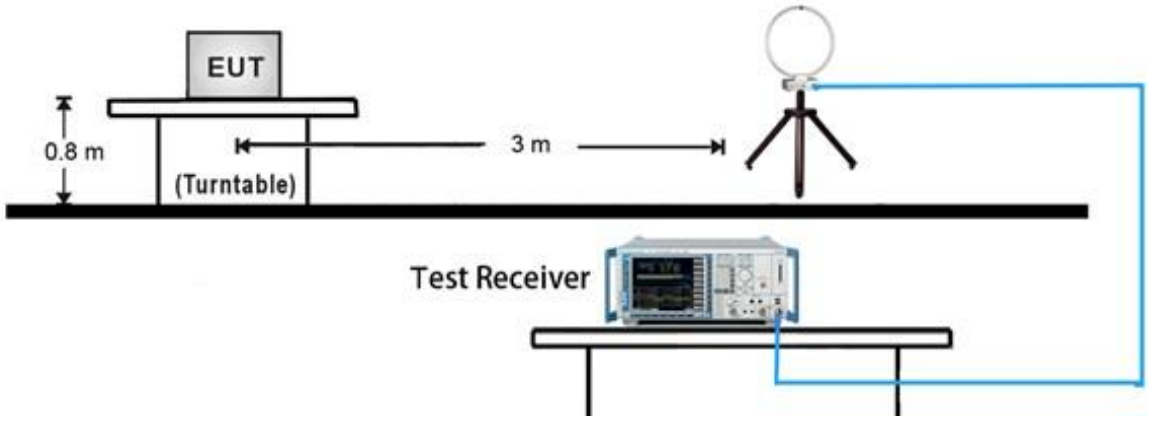


Under 1GHz Test Setup

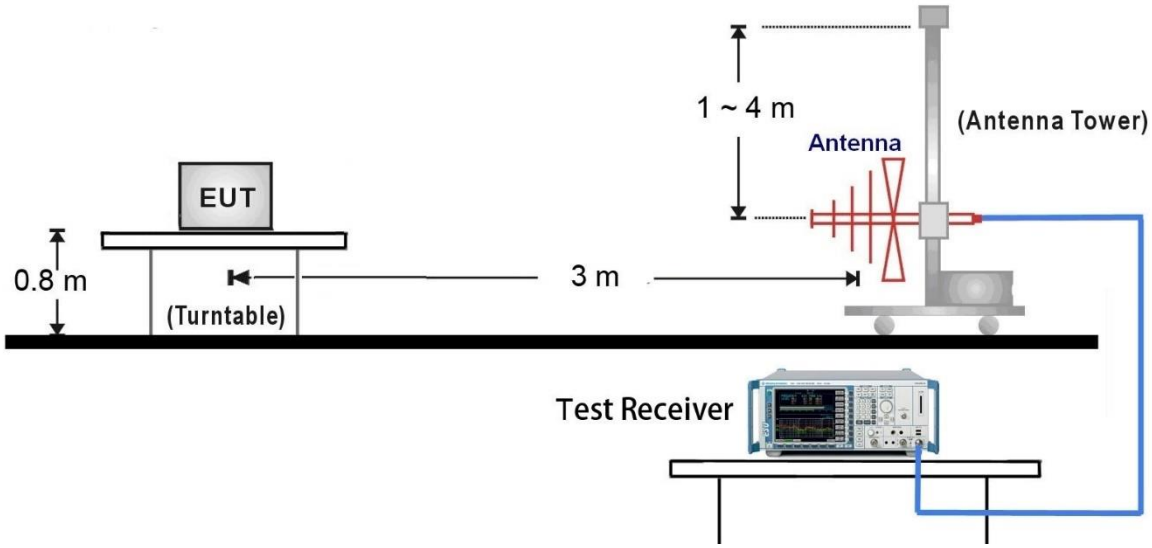

1GHz ~ 18GHz Test Setup:

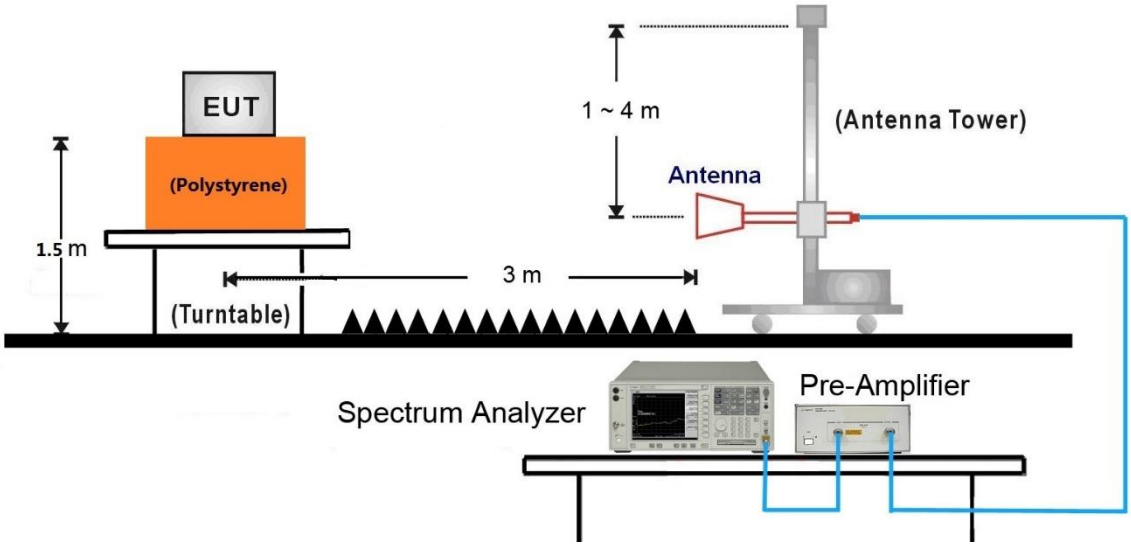


18GHz ~25GHz Test Setup:

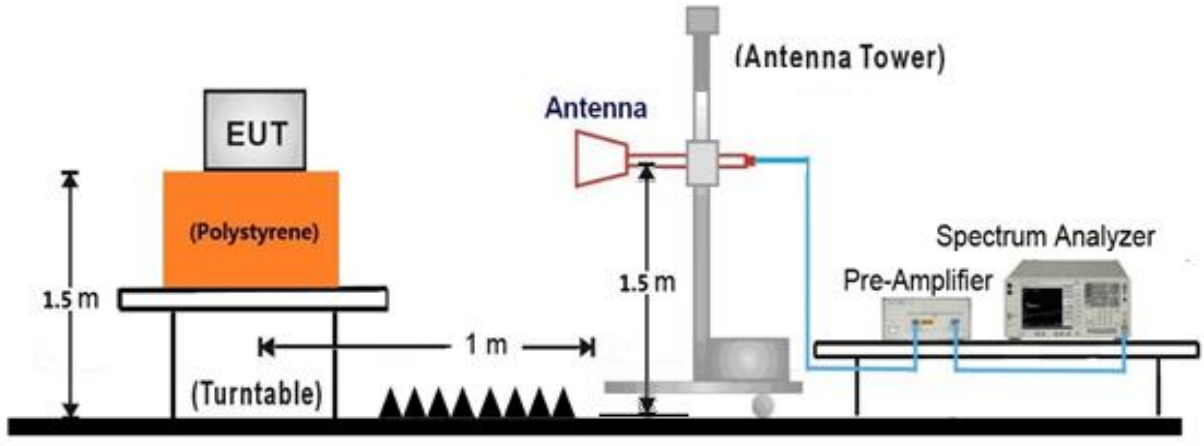

5.5.4 頻帶邊緣測試結果

Type A Filter Configuration

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	120/60Hz

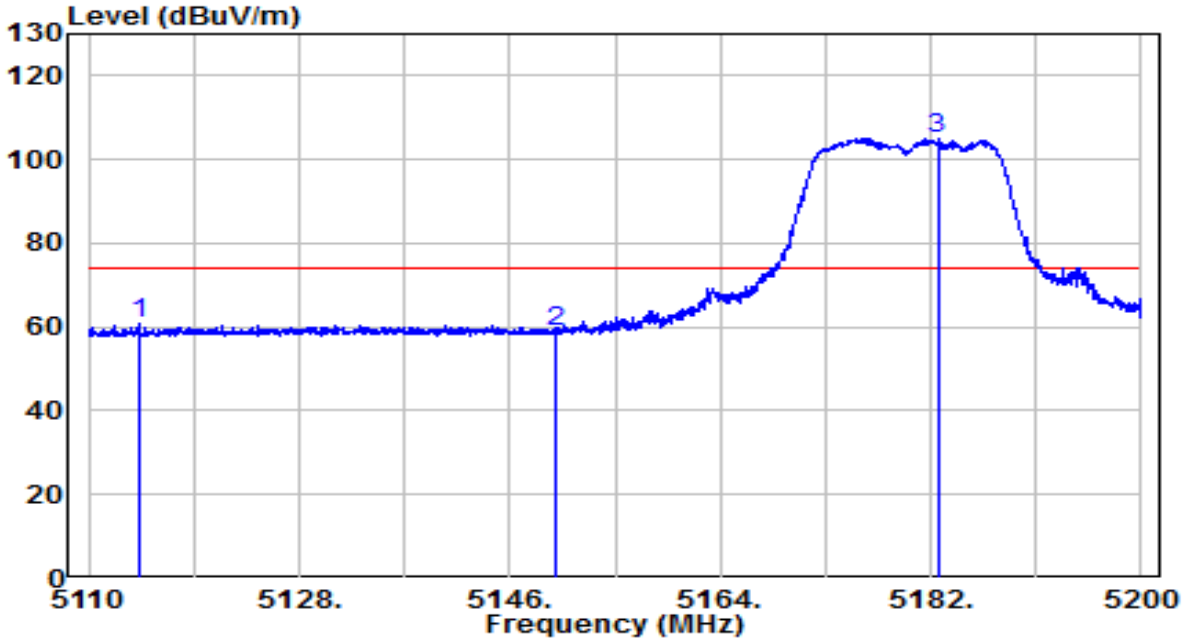


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5114.230	40.89	19.87	60.76	-13.24	74.00	Peak
2		5150.000	39.07	19.91	58.97	-15.03	74.00	Peak
3		5182.585	85.19	19.94	105.13	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5180MHz	Test Voltage	120/60Hz

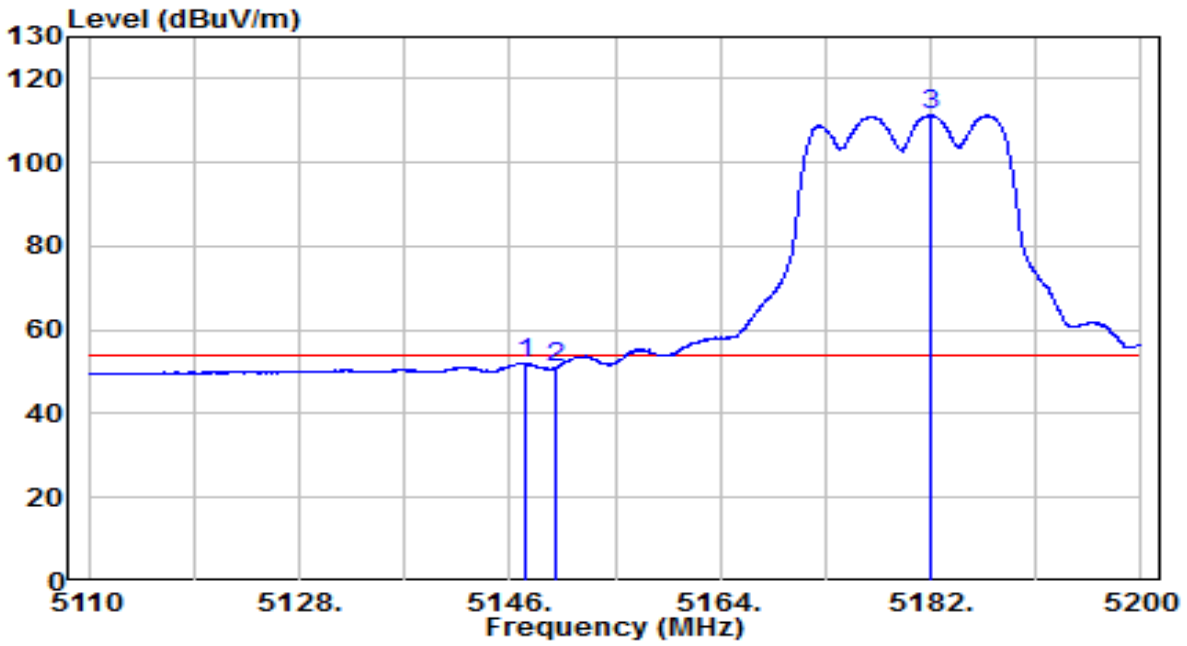


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5147.260	32.25	19.90	52.16	-1.84	54.00	Average
2		5150.000	31.16	19.91	51.07	-2.93	54.00	Average
3		5181.955	91.25	19.94	111.19	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5180MHz	Test Voltage	120/60Hz

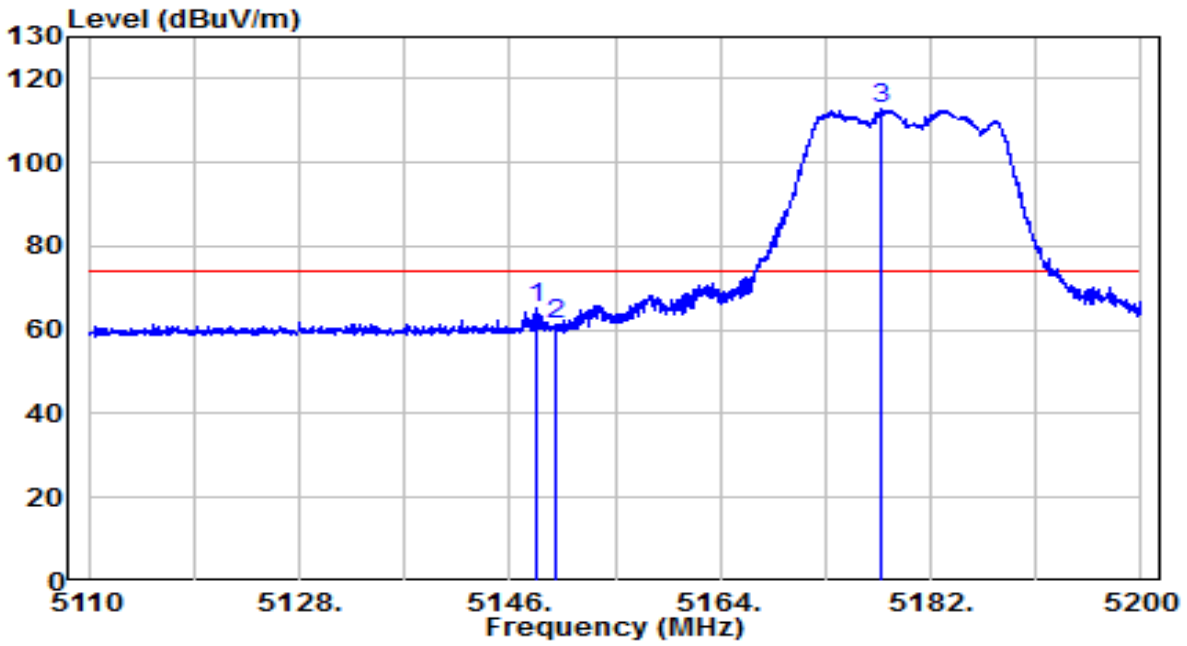


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5148.295	45.20	19.90	65.10	-8.90	74.00	Peak
2		5150.000	41.55	19.91	61.46	-12.54	74.00	Peak
3		5177.680	92.76	19.93	112.70	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5180MHz	Test Voltage	120/60Hz

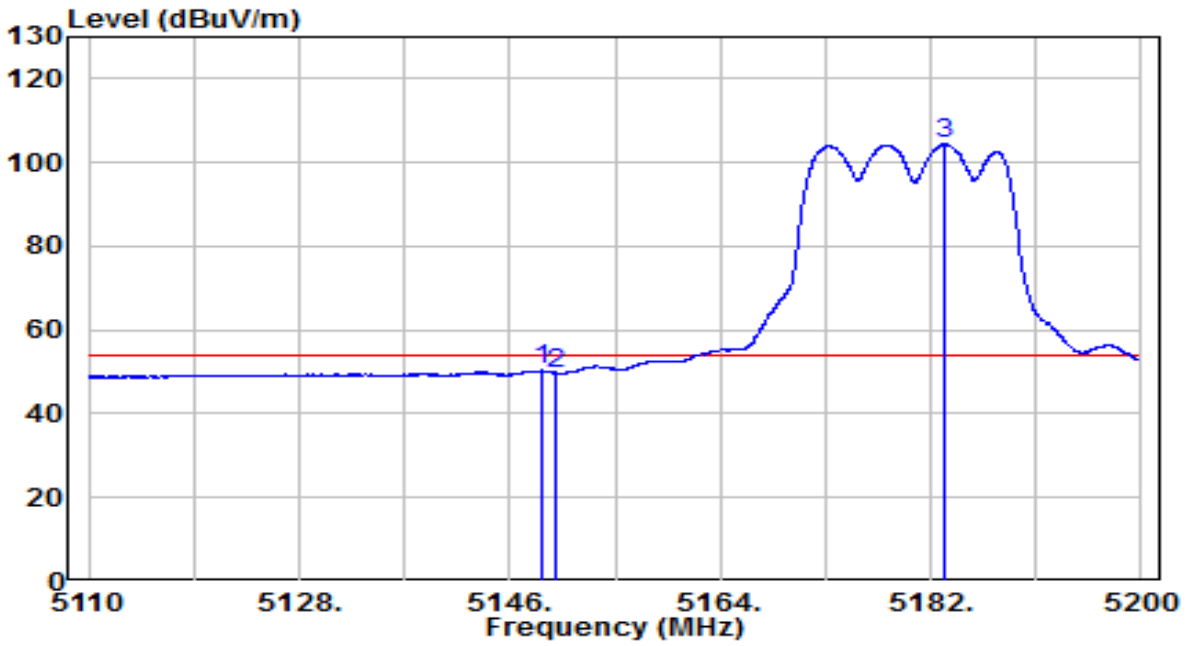


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5148.655	30.42	19.90	50.33	-3.67	54.00	Average
2		5150.000	29.84	19.91	49.75	-4.25	54.00	Average
3		5183.215	84.42	19.94	104.36	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5240MHz	Test Voltage	120/60Hz

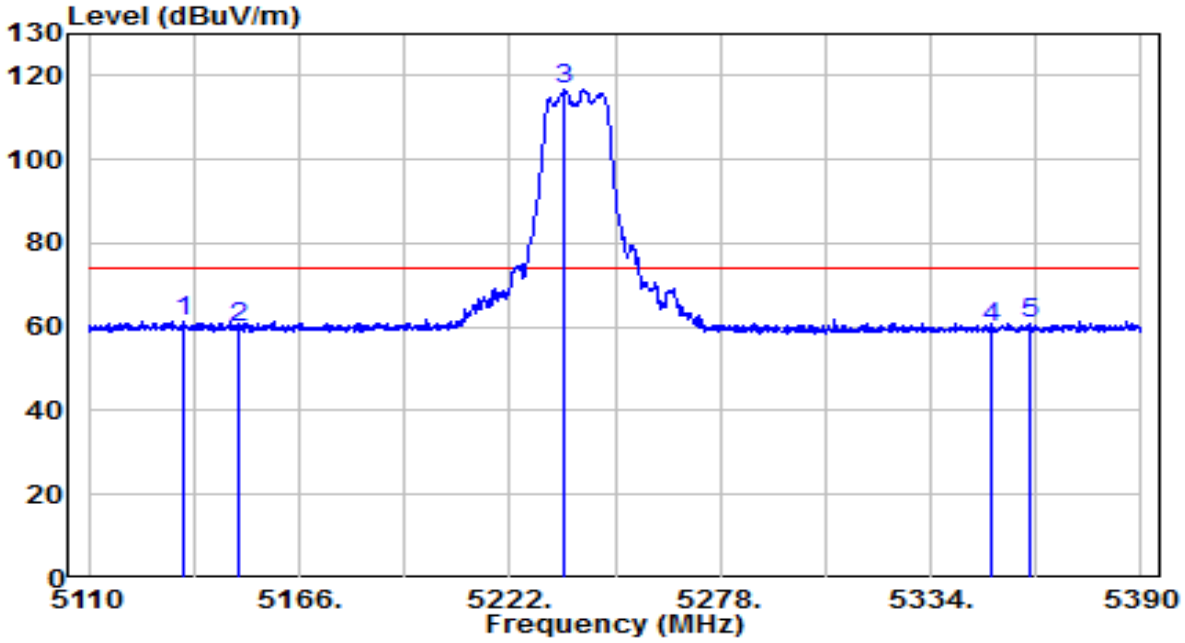


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5135.200	41.49	19.89	61.39	-12.61	74.00	Peak
2		5150.000	40.12	19.91	60.02	-13.98	74.00	Peak
3		5236.700	96.54	20.00	116.53	N/A	N/A	Peak
4		5350.000	39.49	20.11	59.61	-14.39	74.00	Peak
5		5360.460	40.70	20.12	60.83	-13.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5240MHz	Test Voltage	120/60Hz

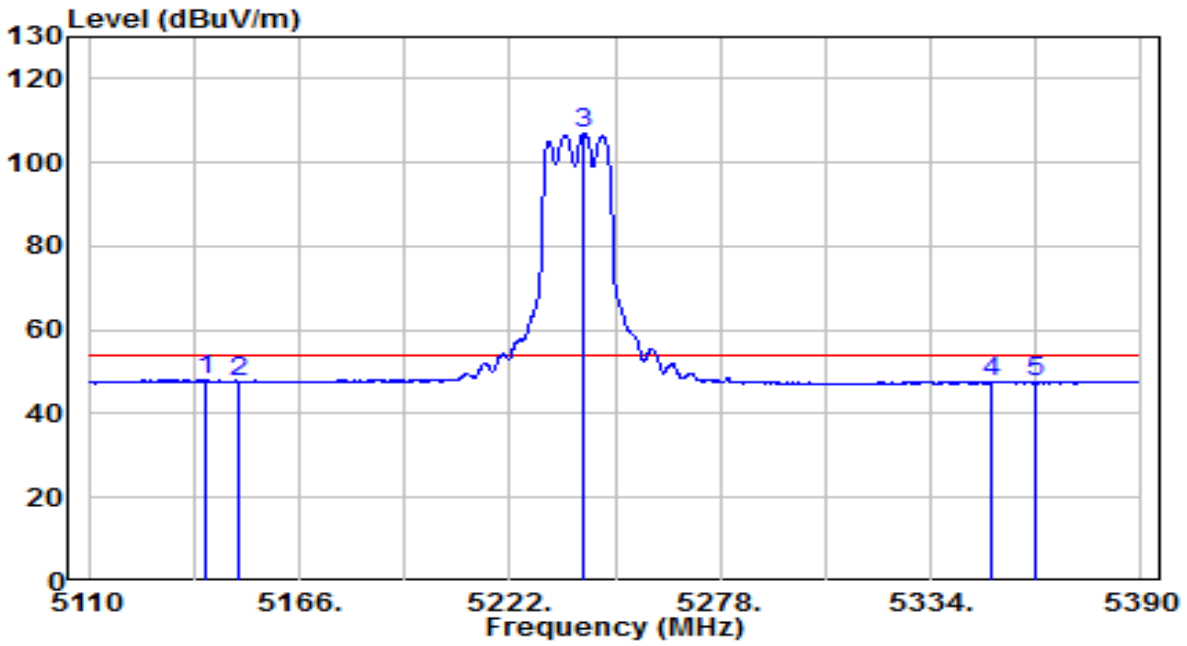


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5141.220	28.01	19.90	47.91	-6.09	54.00	Average
2		5150.000	27.79	19.91	47.69	-6.31	54.00	Average
3		5241.600	87.00	20.00	107.00	N/A	N/A	Average
4		5350.000	27.37	20.11	47.48	-6.52	54.00	Average
5		5362.140	27.49	20.13	47.62	-6.38	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5240MHz	Test Voltage	120/60Hz

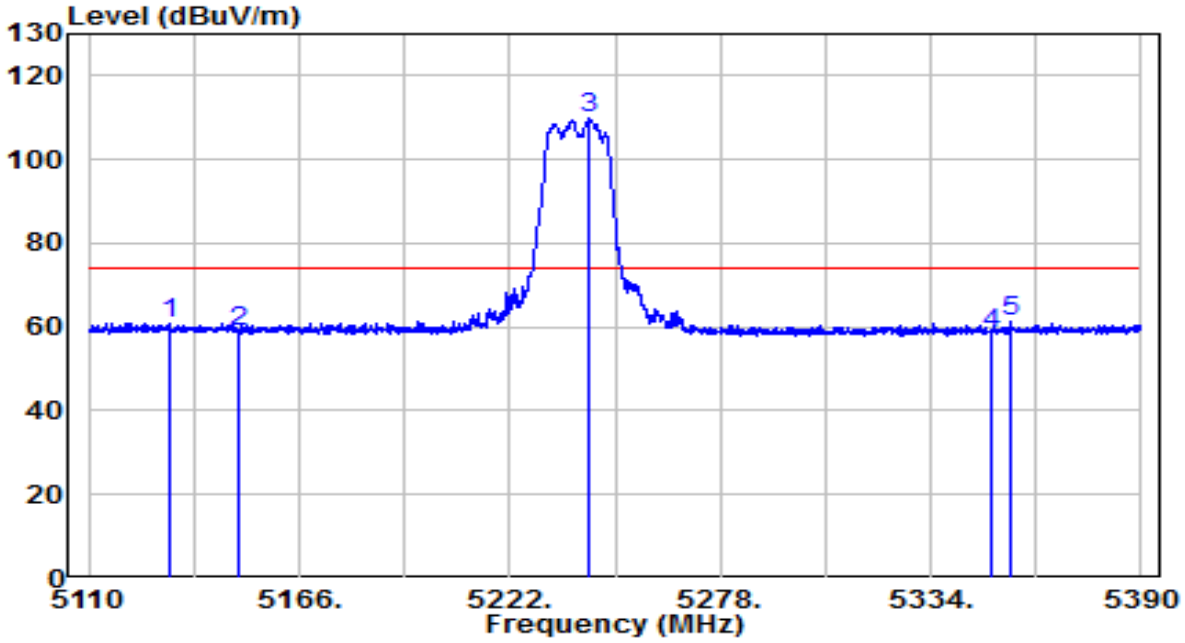


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5131.420	40.92	19.89	60.80	-13.20	74.00	Peak
2		5150.000	38.87	19.91	58.77	-15.23	74.00	Peak
3		5243.140	89.70	20.00	109.70	N/A	N/A	Peak
4		5350.000	38.50	20.11	58.61	-15.39	74.00	Peak
5	*	5355.140	41.43	20.12	61.55	-12.45	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5240MHz	Test Voltage	120/60Hz

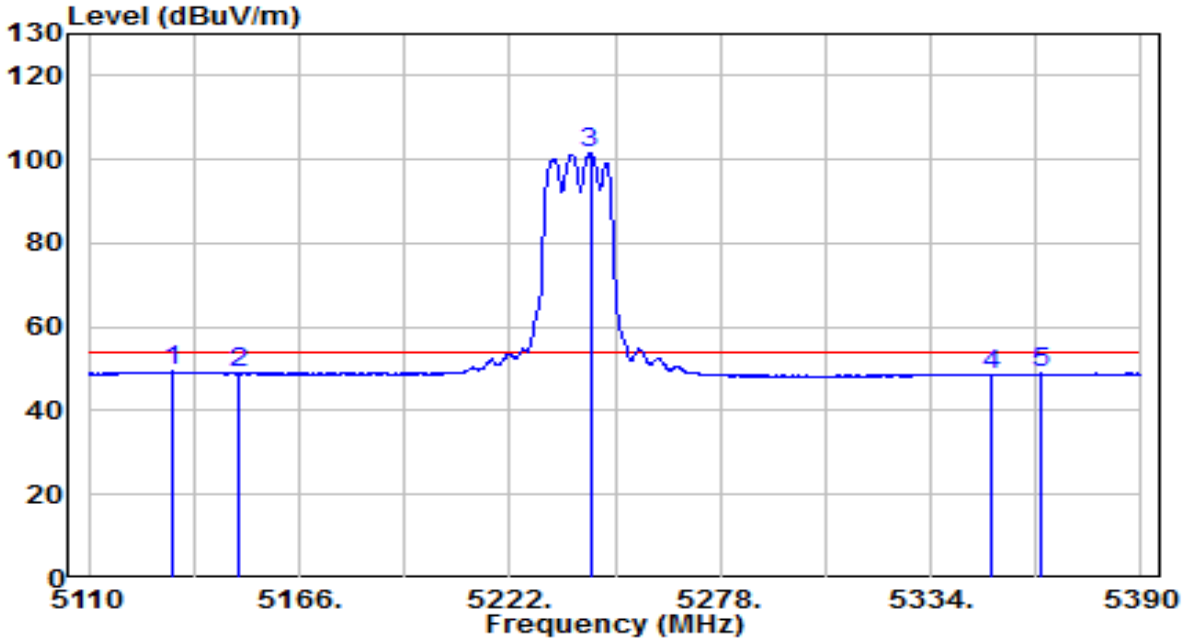


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5132.120	29.45	19.89	49.34	-4.66	54.00	Average
2		5150.000	29.01	19.91	48.91	-5.09	54.00	Average
3		5243.420	81.62	20.00	101.62	N/A	N/A	Average
4		5350.000	28.38	20.11	48.49	-5.51	54.00	Average
5		5363.120	28.74	20.13	48.87	-5.13	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5320MHz	Test Voltage	120/60Hz

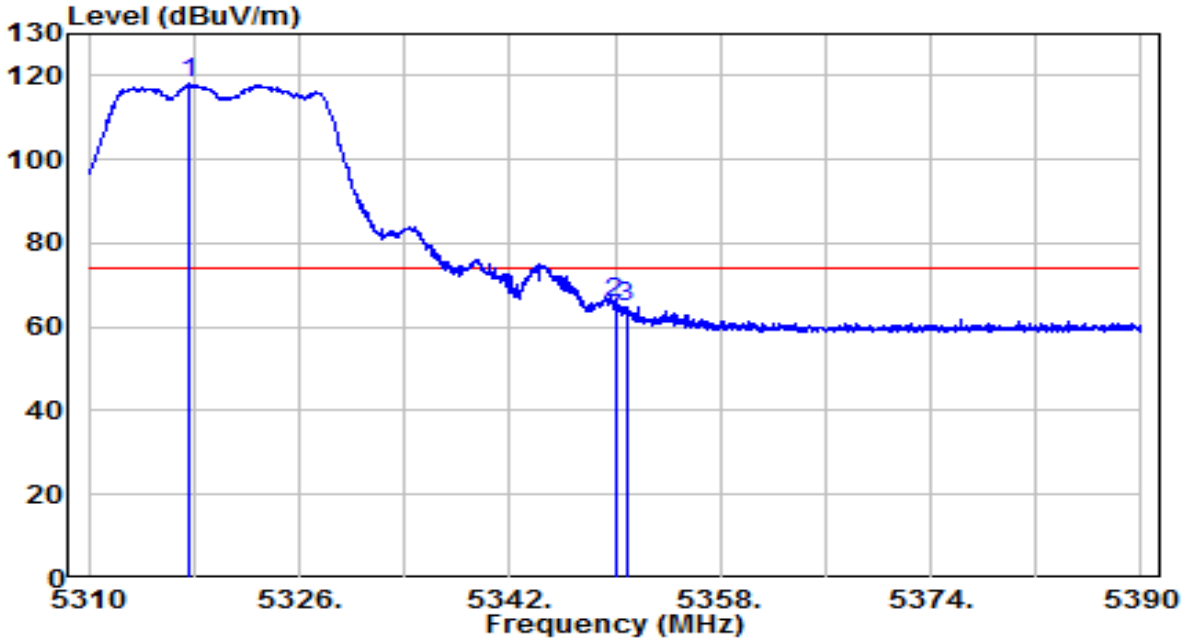


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5317.680	97.94	20.08	118.02	N/A	N/A	Peak
2	*	5350.000	45.70	20.11	65.82	-8.18	74.00	Peak
3		5350.840	44.73	20.11	64.85	-9.15	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5320MHz	Test Voltage	120/60Hz

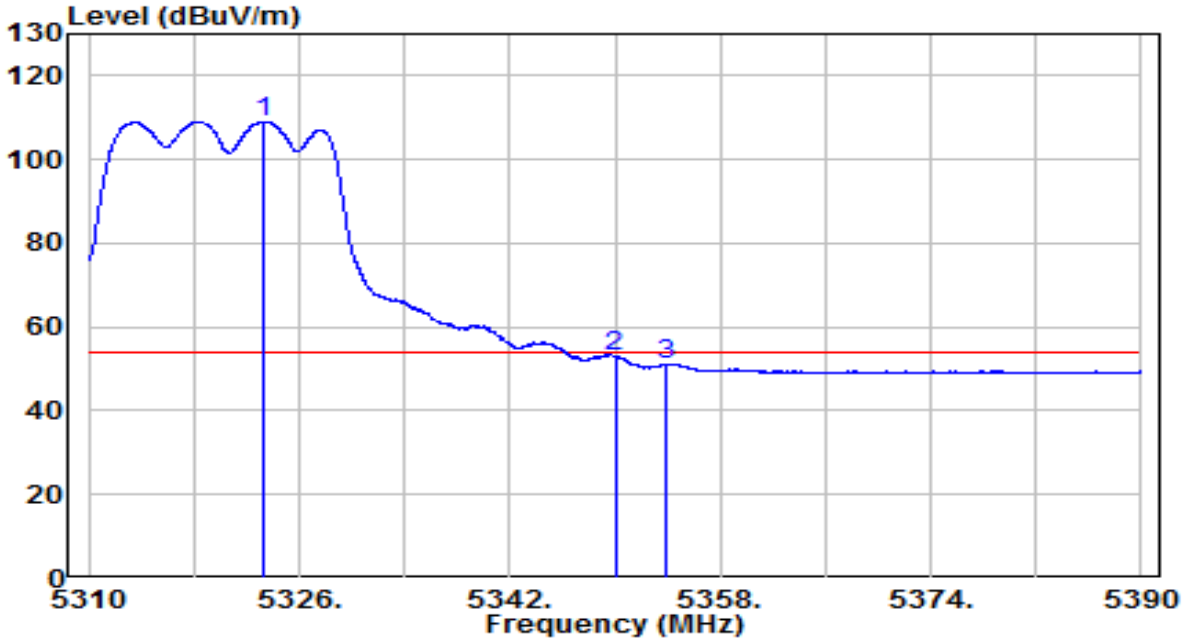


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5323.320	89.04	20.09	109.12	N/A	N/A	Average
2	*	5350.000	32.89	20.11	53.01	-0.99	54.00	Average
3		5353.920	31.11	20.12	51.23	-2.77	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5320MHz	Test Voltage	120/60Hz

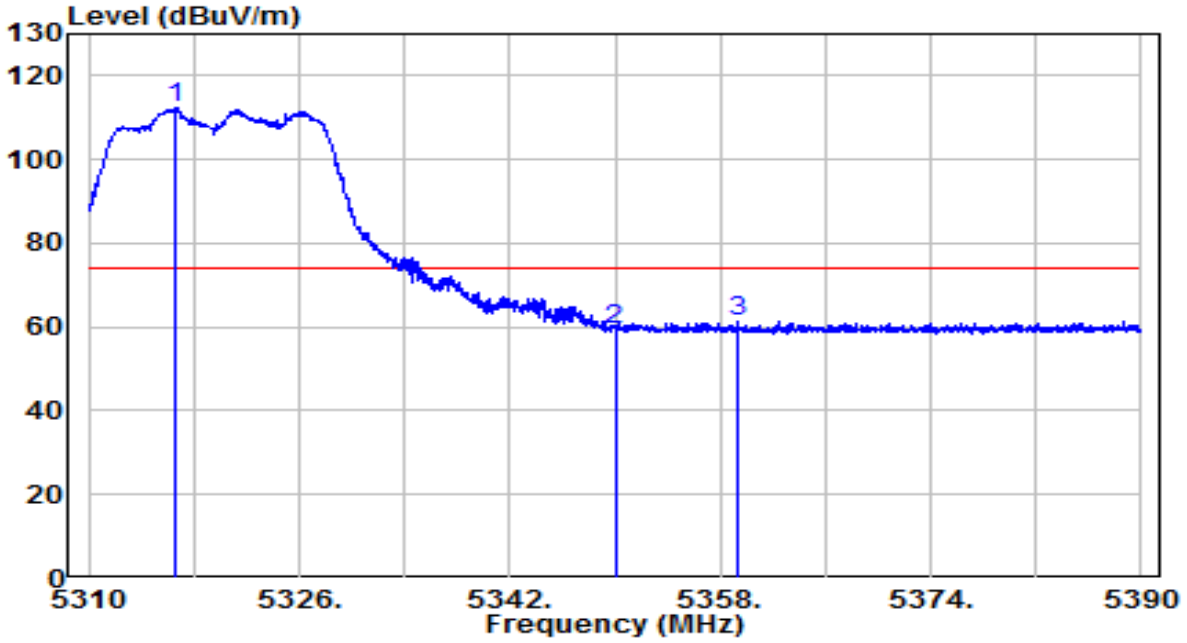


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5316.640	92.37	20.08	112.45	N/A	N/A	Peak
2		5350.000	39.43	20.11	59.54	-14.46	74.00	Peak
3	*	5359.360	40.99	20.12	61.12	-12.88	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5320MHz	Test Voltage	120/60Hz

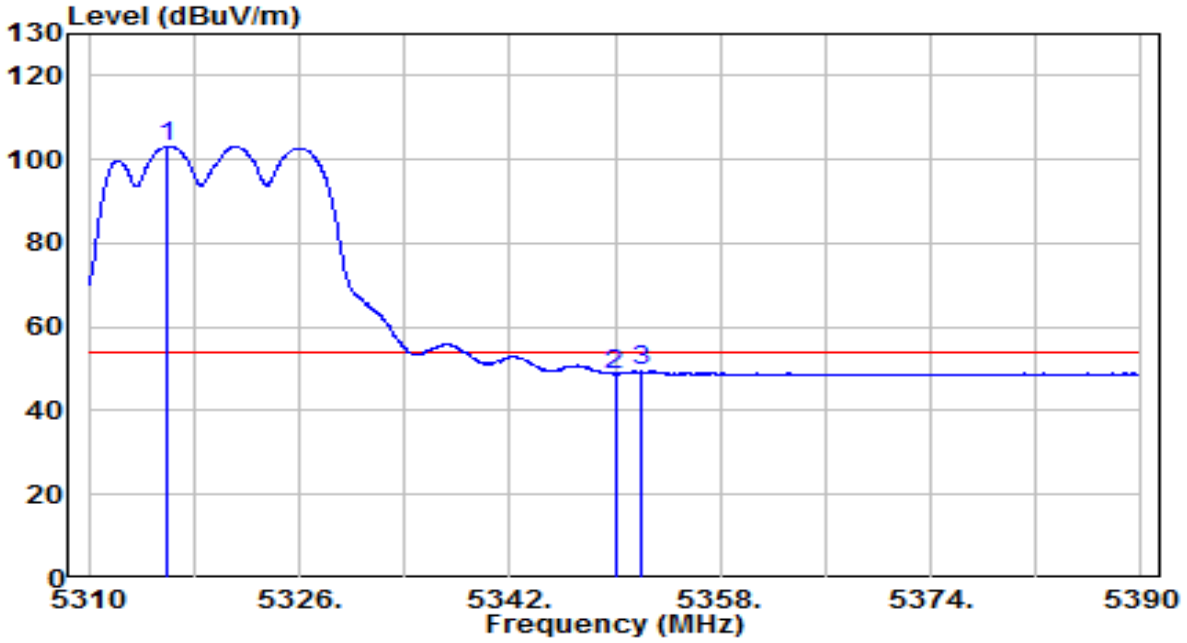


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5316.040	83.17	20.08	103.25	N/A	N/A	Average
2		5350.000	28.58	20.11	48.70	-5.30	54.00	Average
3	*	5351.920	29.36	20.12	49.48	-4.52	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5500MHz	Test Voltage	120/60Hz

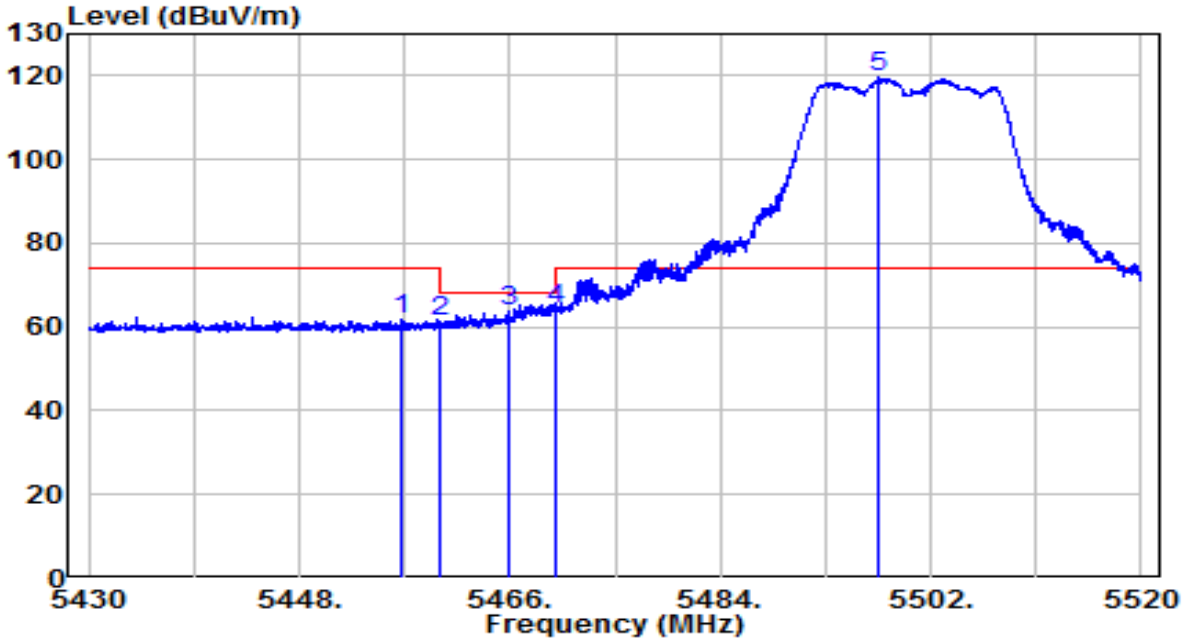


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5456.730	41.43	20.23	61.65	-12.35	74.00	Peak
2		5460.000	40.97	20.23	61.20	-7.00	68.20	Peak
3		5465.820	43.46	20.23	63.69	-4.51	68.20	Peak
4	*	5470.000	44.26	20.24	64.50	-3.70	68.20	Peak
5		5497.545	99.30	20.27	119.57	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5500MHz	Test Voltage	120/60Hz

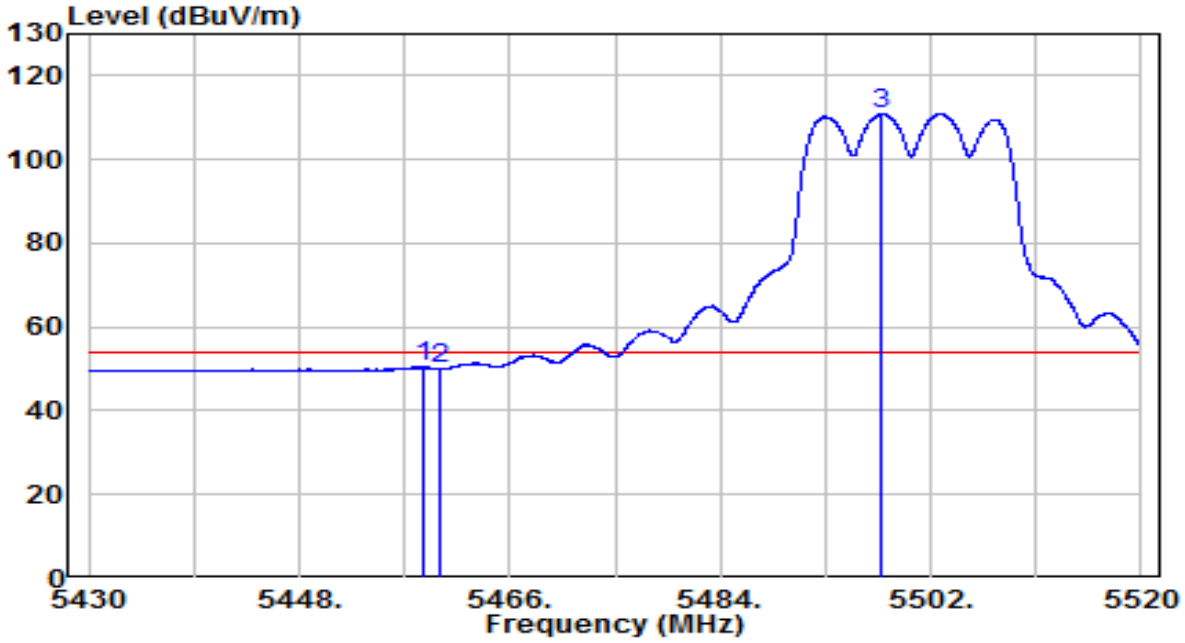


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5458.665	30.32	20.23	50.55	-3.45	54.00	Average
2		5460.000	29.81	20.23	50.04	-3.96	54.00	Average
3		5497.815	90.66	20.27	110.93	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5500MHz	Test Voltage	120/60Hz

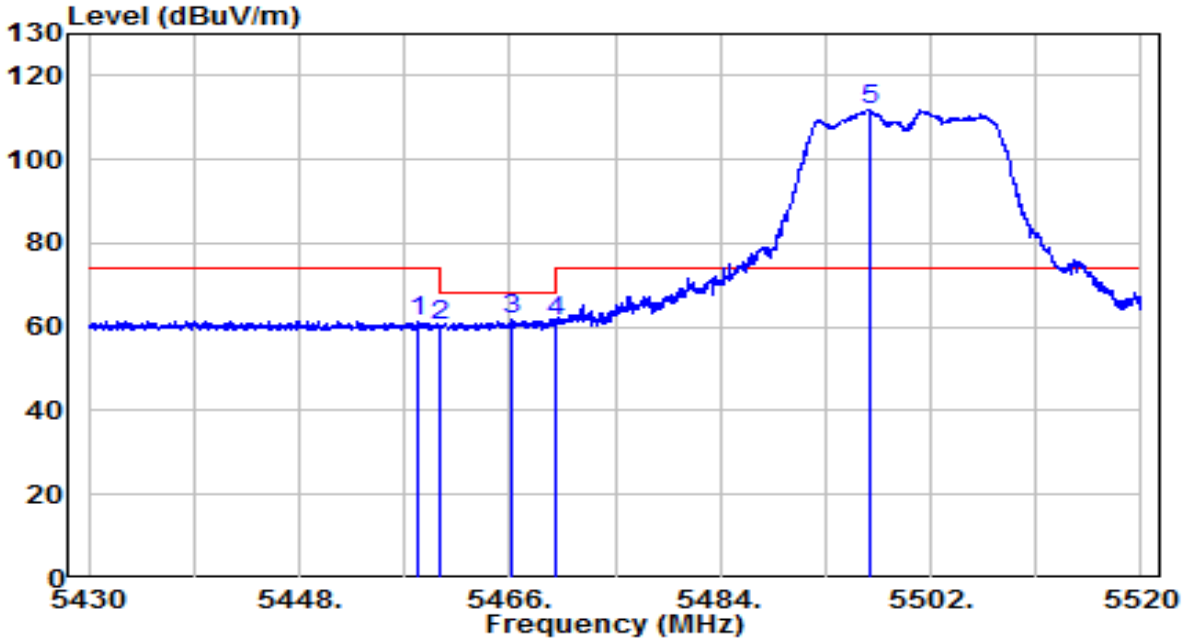


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5458.125	40.90	20.23	61.13	-12.87	74.00	Peak
2		5460.000	39.91	20.23	60.14	-8.06	68.20	Peak
3	*	5466.180	41.43	20.23	61.67	-6.53	68.20	Peak
4		5470.000	41.11	20.24	61.35	-6.85	68.20	Peak
5		5496.780	91.75	20.27	112.02	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5500MHz	Test Voltage	120/60Hz

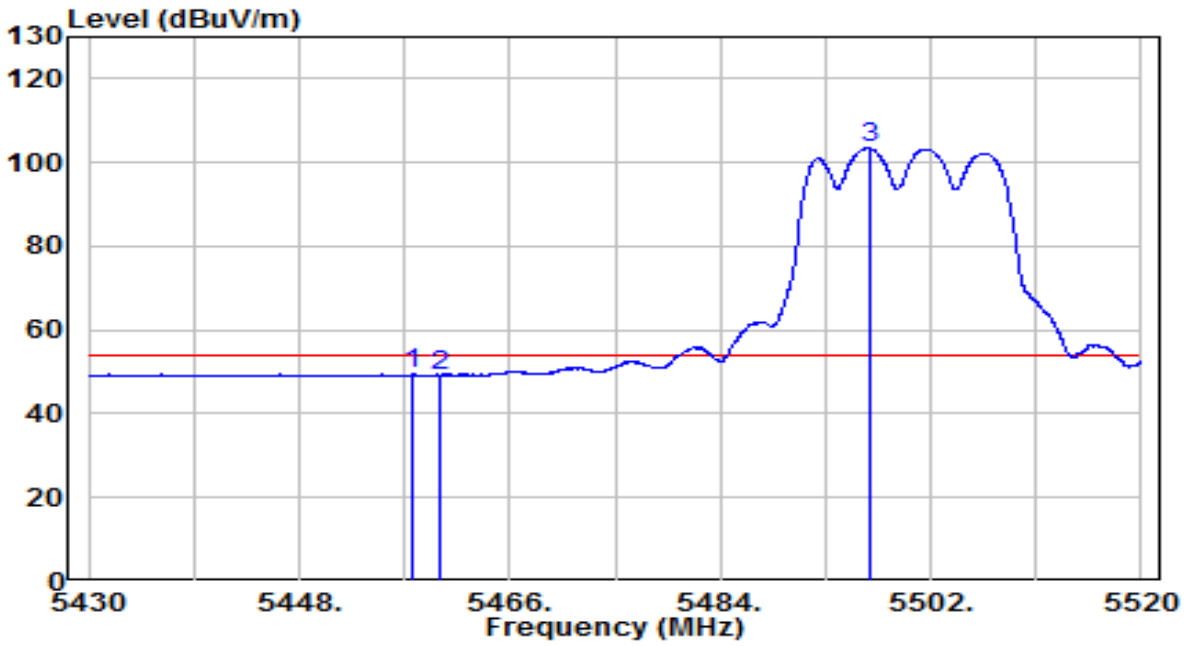


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5457.720	29.13	20.23	49.36	-4.64	54.00	Average
2		5460.000	29.04	20.23	49.26	-4.74	54.00	Average
3		5496.825	83.13	20.27	103.40	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5700MHz	Test Voltage	120/60Hz

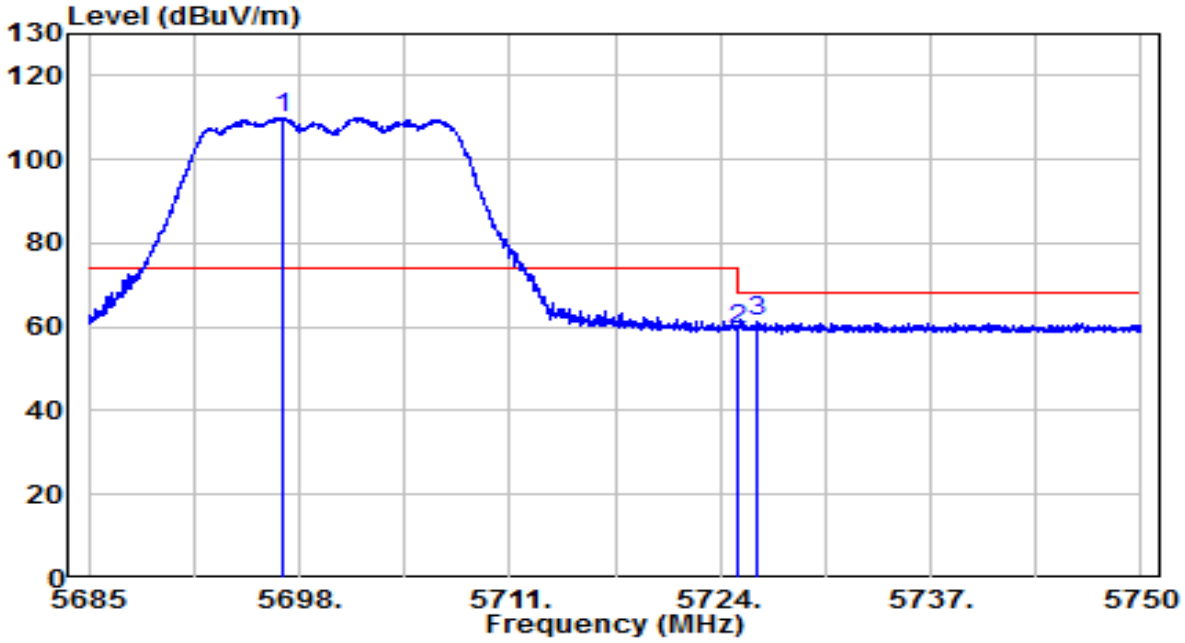


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5696.993	89.17	20.91	110.08	N/A	N/A	Peak
2		5725.000	38.60	21.00	59.60	-8.60	68.20	Peak
3	*	5726.210	40.55	21.00	61.56	-6.64	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5700MHz	Test Voltage	120/60Hz

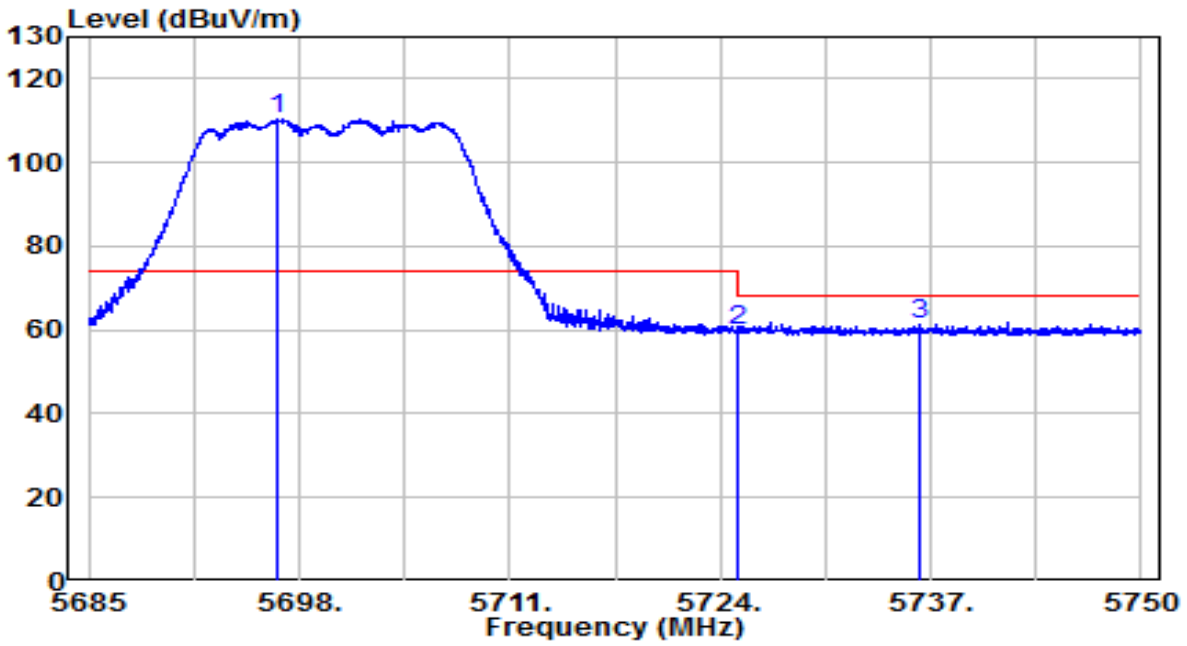


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5696.700	89.65	20.91	110.56	N/A	N/A	Peak
2		5725.000	38.92	21.00	59.92	-8.28	68.20	Peak
3	*	5736.382	40.29	21.04	61.32	-6.88	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5745MHz	Test Voltage	120/60Hz

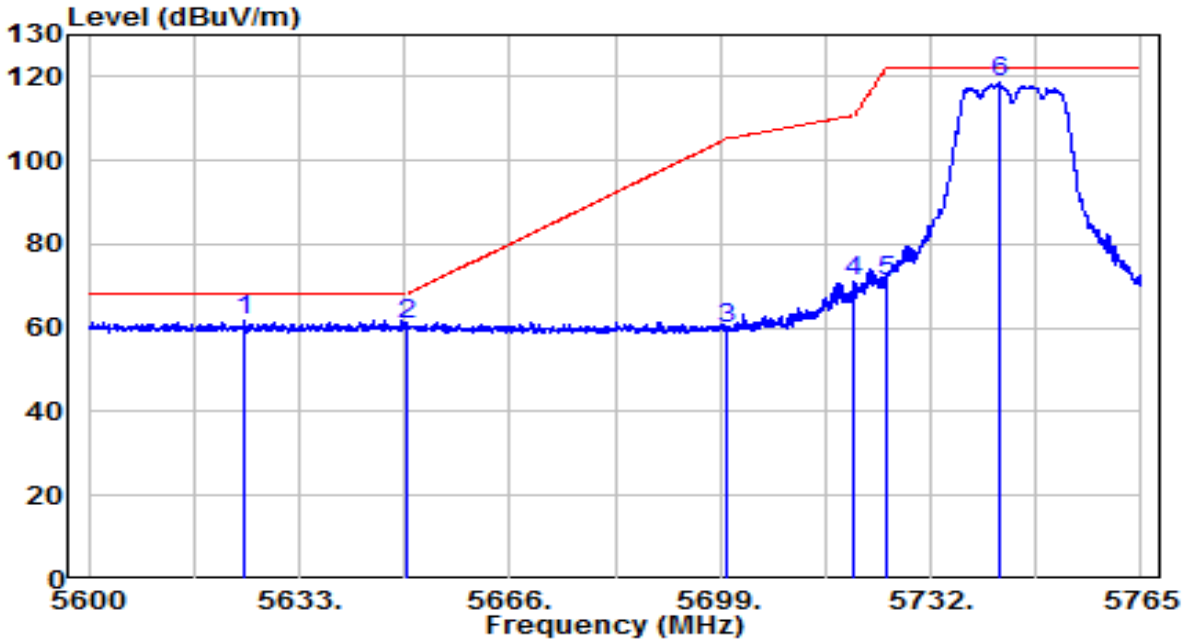


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5624.502	41.19	20.67	61.86	-6.34	68.20	Peak
2		5650.000	39.94	20.76	60.69	-7.51	68.20	Peak
3		5700.000	39.17	20.92	60.09	-45.11	105.20	Peak
4		5720.000	50.26	20.98	71.24	-39.56	110.80	Peak
5		5725.000	50.18	21.00	71.18	-51.02	122.20	Peak
6		5742.643	97.57	21.06	118.62	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5745MHz	Test Voltage	120/60Hz

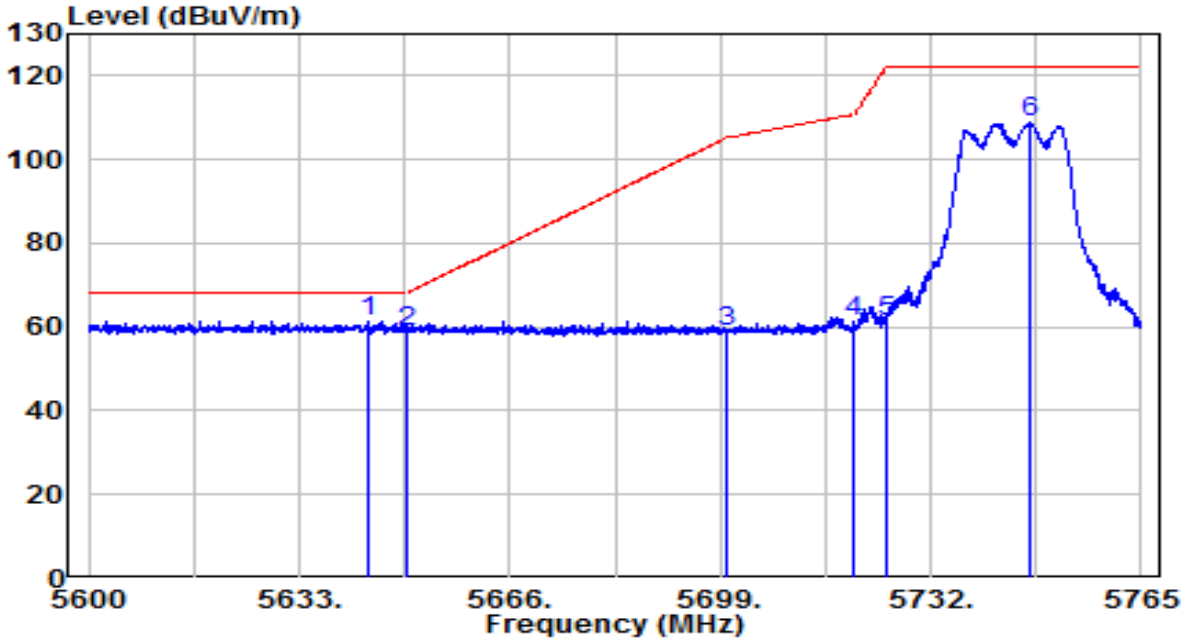


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5643.643	40.69	20.74	61.42	-6.78	68.20	Peak
2		5650.000	38.08	20.76	58.83	-9.37	68.20	Peak
3		5700.000	37.88	20.92	58.79	-46.41	105.20	Peak
4		5720.000	40.58	20.98	61.56	-49.24	110.80	Peak
5		5725.000	40.26	21.00	61.26	-60.94	122.20	Peak
6		5747.592	87.89	21.07	108.96	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5825MHz	Test Voltage	120/60Hz

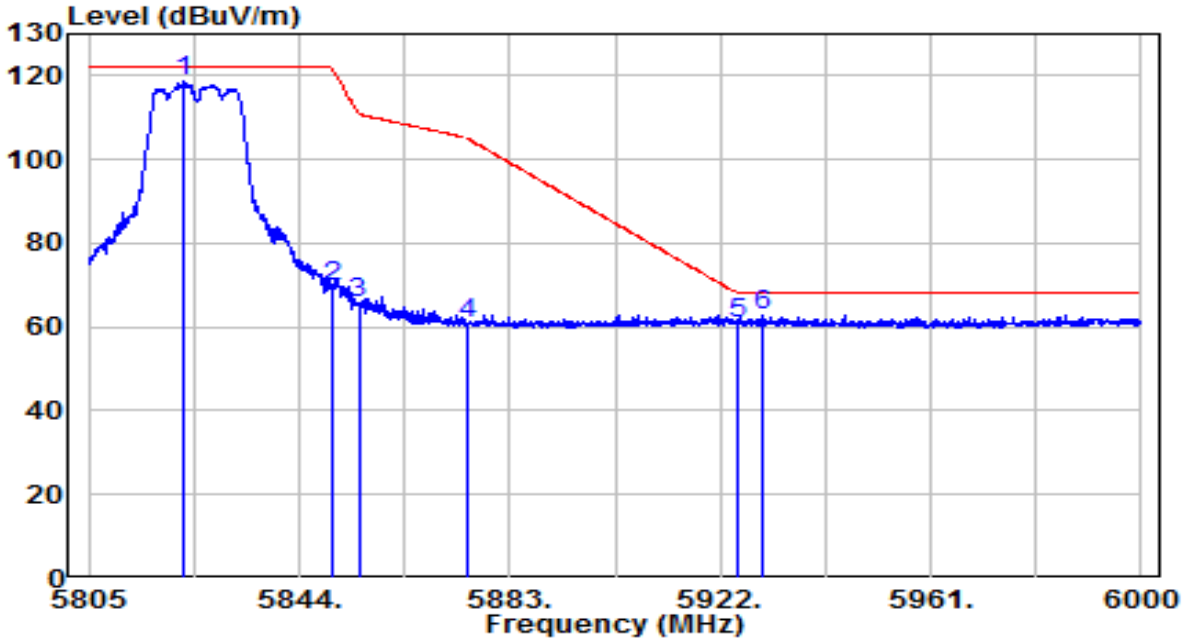


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5822.647	97.16	21.32	118.48	N/A	N/A	Peak
2		5850.000	48.25	21.40	69.66	-52.54	122.20	Peak
3		5855.000	44.12	21.42	65.54	-45.26	110.80	Peak
4		5875.000	39.24	21.49	60.73	-44.47	105.20	Peak
5		5925.000	39.28	21.65	60.93	-7.27	68.20	Peak
6	*	5929.605	41.09	21.66	62.75	-5.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5825MHz	Test Voltage	120/60Hz

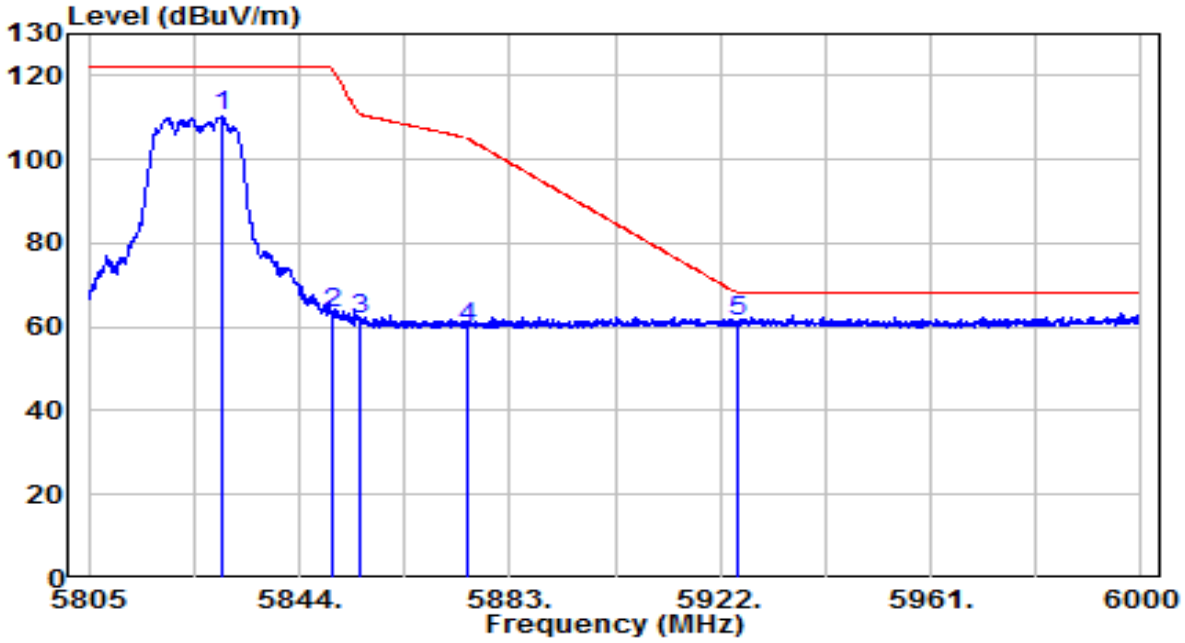


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5829.667	88.89	21.34	110.23	N/A	N/A	Peak
2		5850.000	41.88	21.40	63.28	-58.92	122.20	Peak
3		5855.018	40.16	21.42	61.58	-49.22	110.80	Peak
4		5875.000	38.49	21.49	59.98	-45.22	105.20	Peak
5	*	5925.000	39.82	21.65	61.46	-6.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120/60Hz

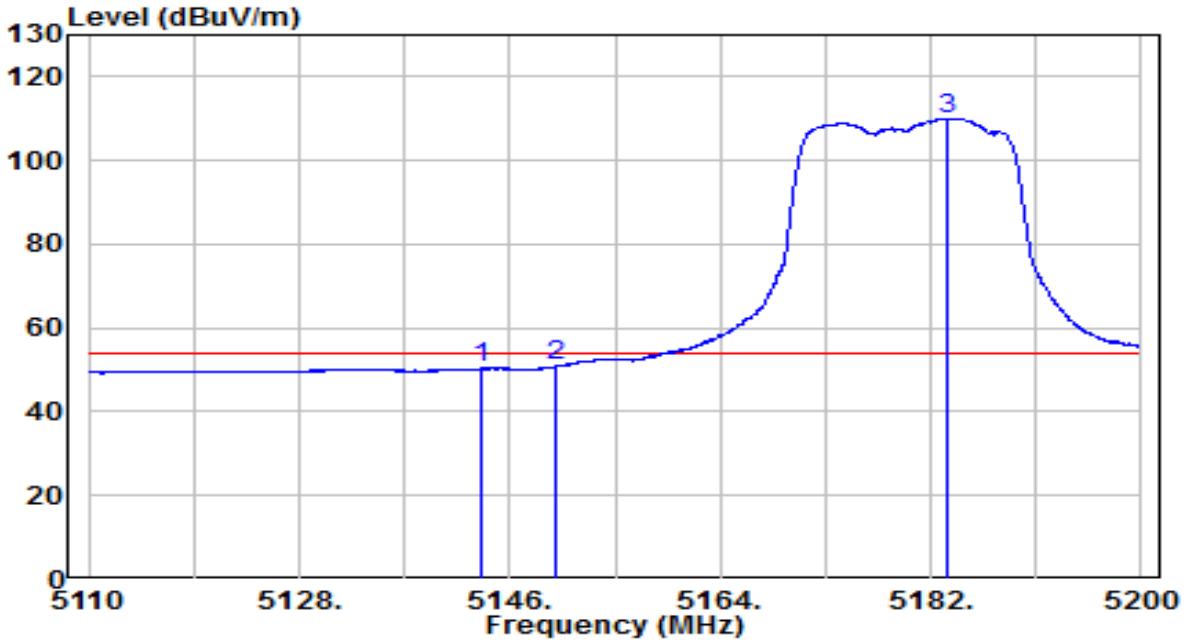


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5143.660	30.42	19.90	50.31	-3.69	54.00	Average
2	*	5150.000	30.87	19.91	50.78	-3.22	54.00	Average
3		5183.305	90.09	19.94	110.03	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120/60Hz

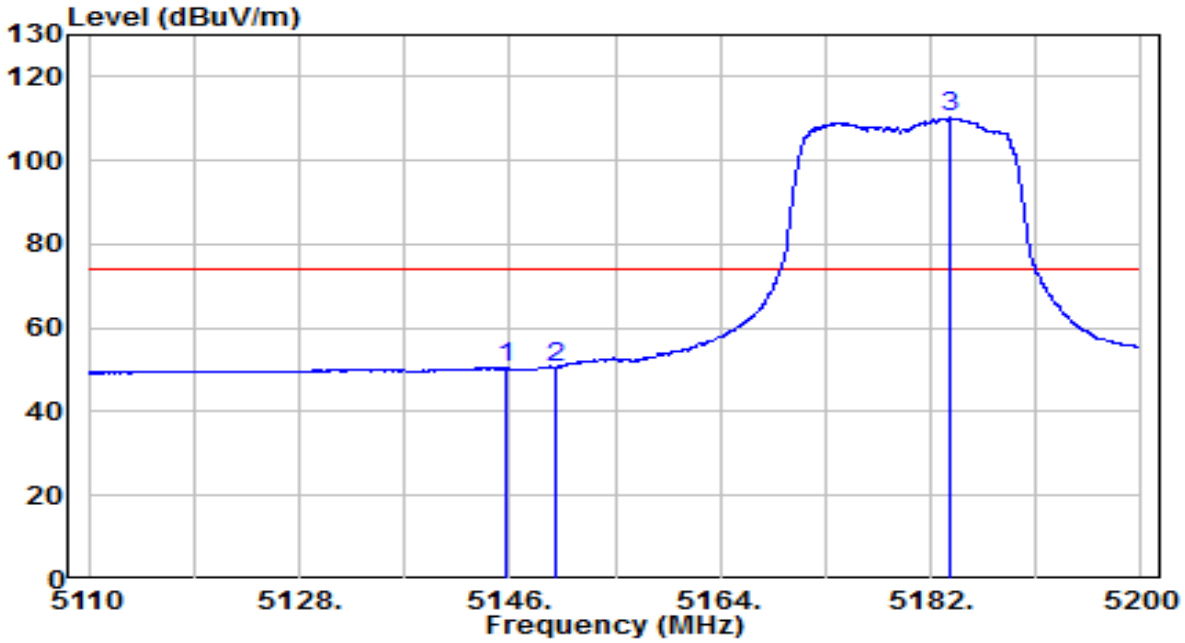


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5145.640	30.53	19.90	50.44	-23.56	74.00	Peak
2	*	5150.000	30.79	19.91	50.70	-23.30	74.00	Peak
3		5183.665	90.22	19.94	110.16	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120/60Hz

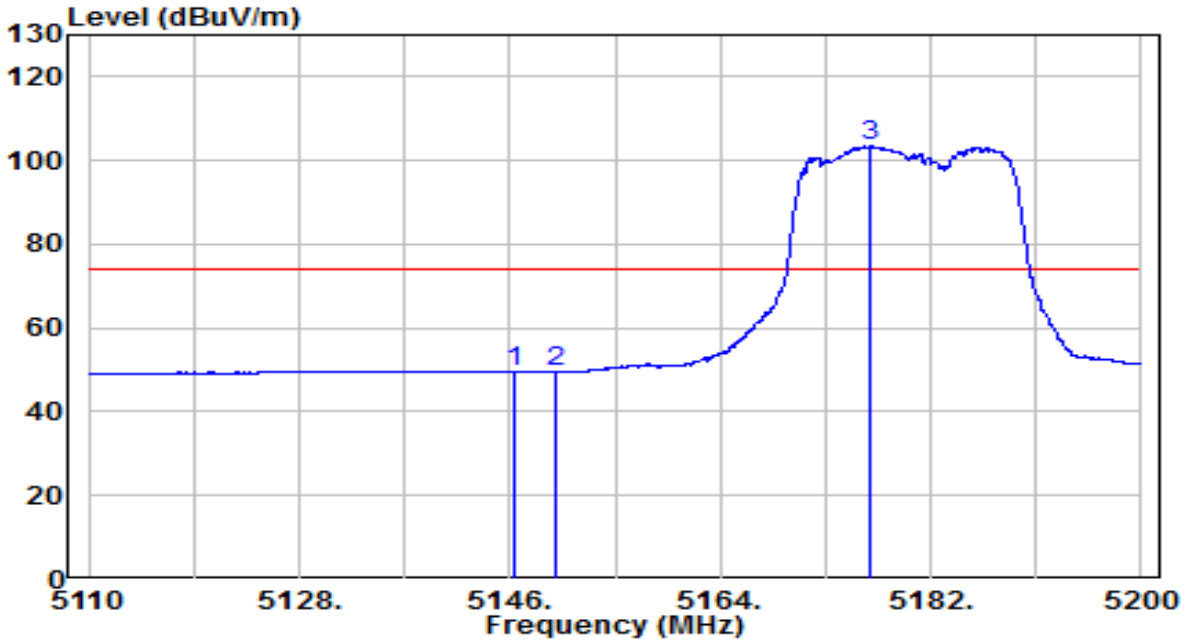


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5146.315	29.75	19.90	49.66	-24.34	74.00	Peak
2		5150.000	29.76	19.91	49.66	-24.34	74.00	Peak
3		5176.915	83.40	19.93	103.34	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120/60Hz

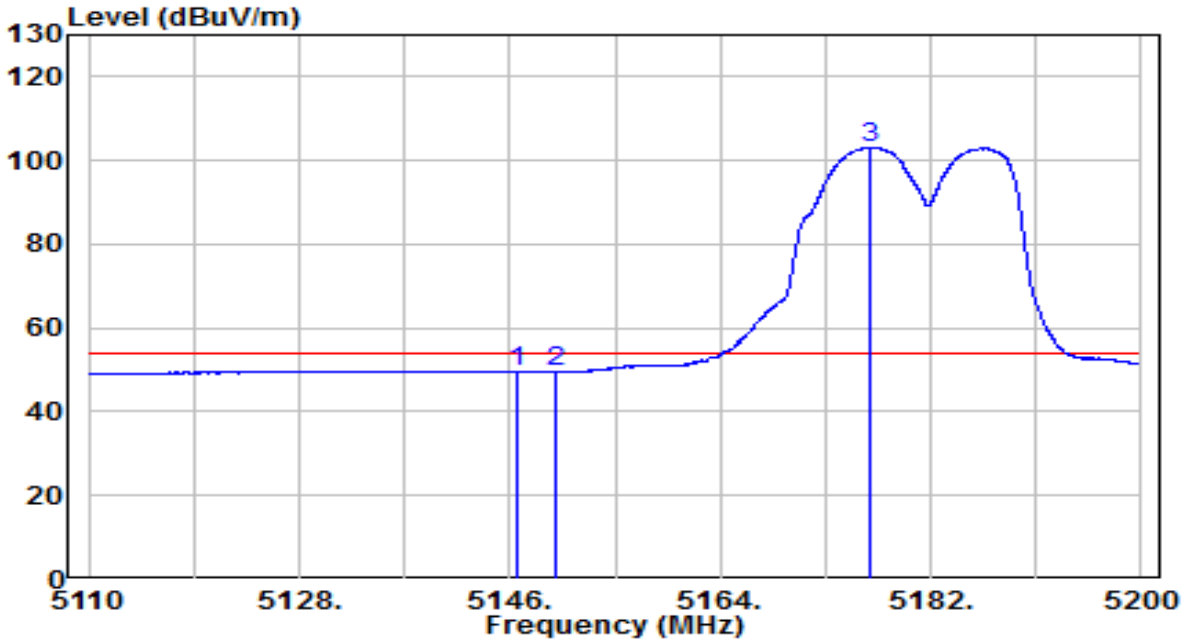


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5146.720	29.85	19.90	49.75	-4.25	54.00	Average
2		5150.000	29.61	19.91	49.51	-4.49	54.00	Average
3		5176.735	83.25	19.93	103.18	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	120/60Hz

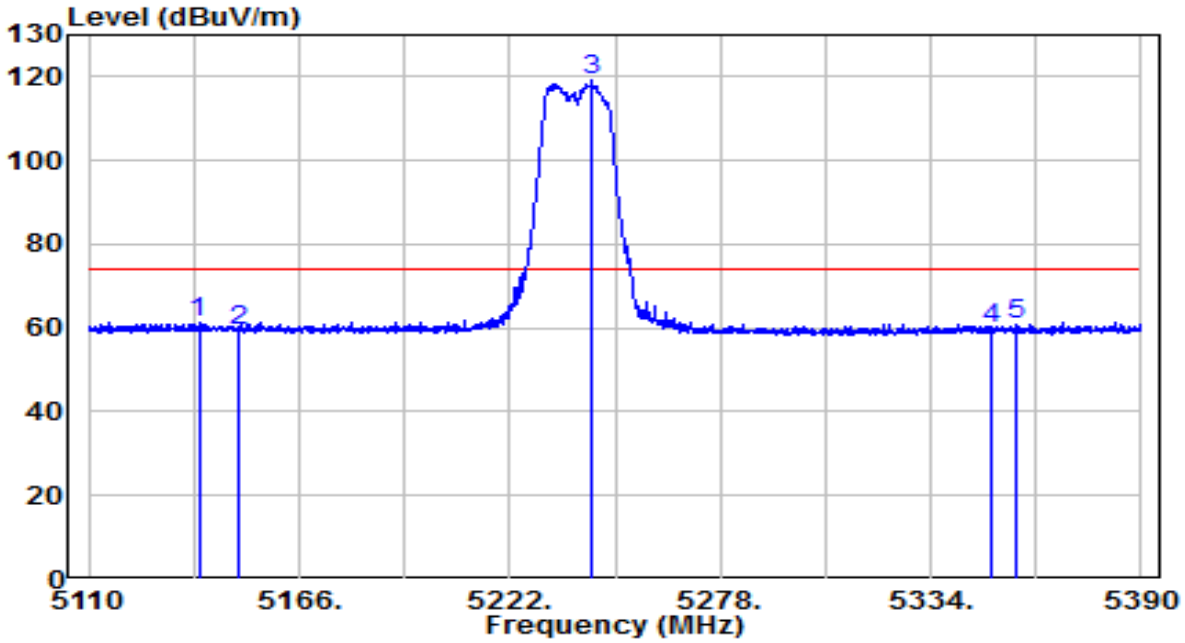


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5139.260	41.51	19.89	61.41	-12.59	74.00	Peak
2		5150.000	39.66	19.91	59.56	-14.44	74.00	Peak
3		5243.700	98.97	20.00	118.97	N/A	N/A	Peak
4		5350.000	39.85	20.11	59.97	-14.03	74.00	Peak
5		5356.540	40.74	20.12	60.86	-13.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	120/60Hz

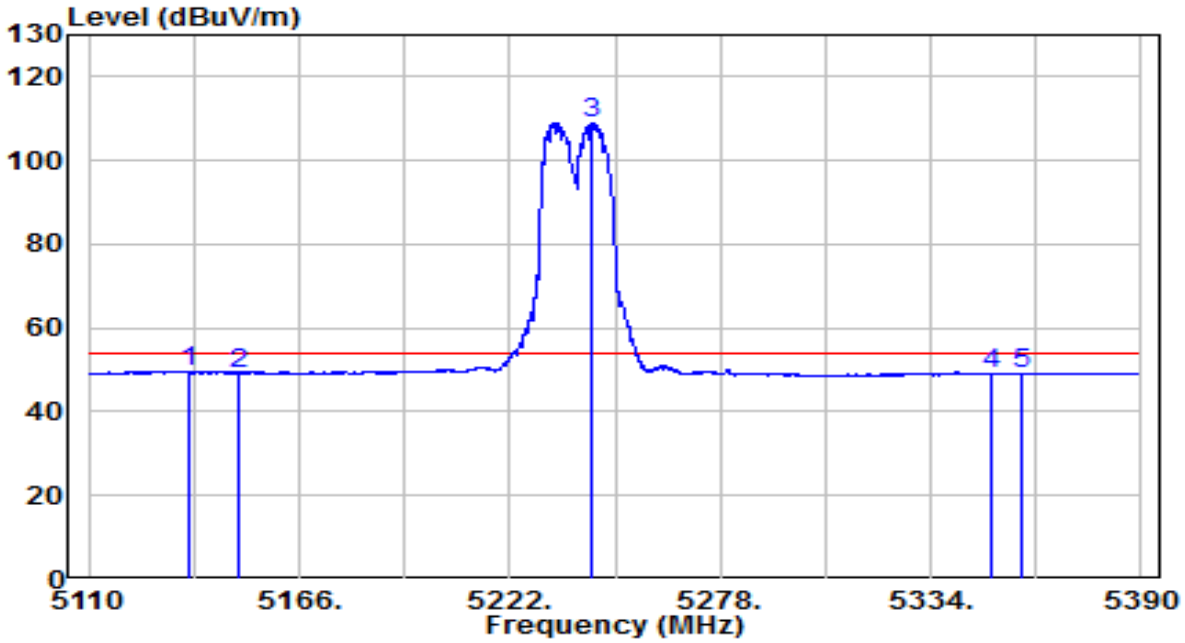


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5136.740	29.69	19.89	49.58	-4.42	54.00	Average
2		5150.000	29.27	19.91	49.18	-4.82	54.00	Average
3		5243.980	89.10	20.00	109.10	N/A	N/A	Average
4		5350.000	28.76	20.11	48.87	-5.13	54.00	Average
5		5358.360	29.02	20.12	49.14	-4.86	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	120/60Hz

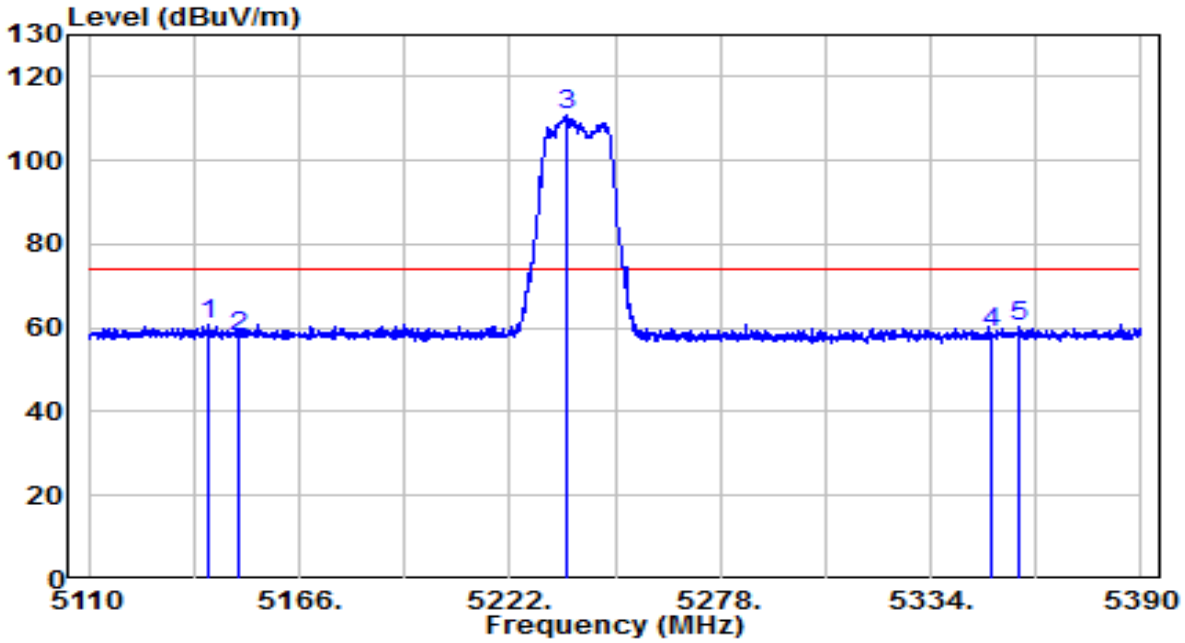


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5141.920	40.75	19.90	60.65	-13.35	74.00	Peak
2		5150.000	38.13	19.91	58.04	-15.96	74.00	Peak
3		5237.260	90.66	20.00	110.65	N/A	N/A	Peak
4		5350.000	38.71	20.11	58.82	-15.18	74.00	Peak
5		5357.380	40.02	20.12	60.14	-13.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	120/60Hz

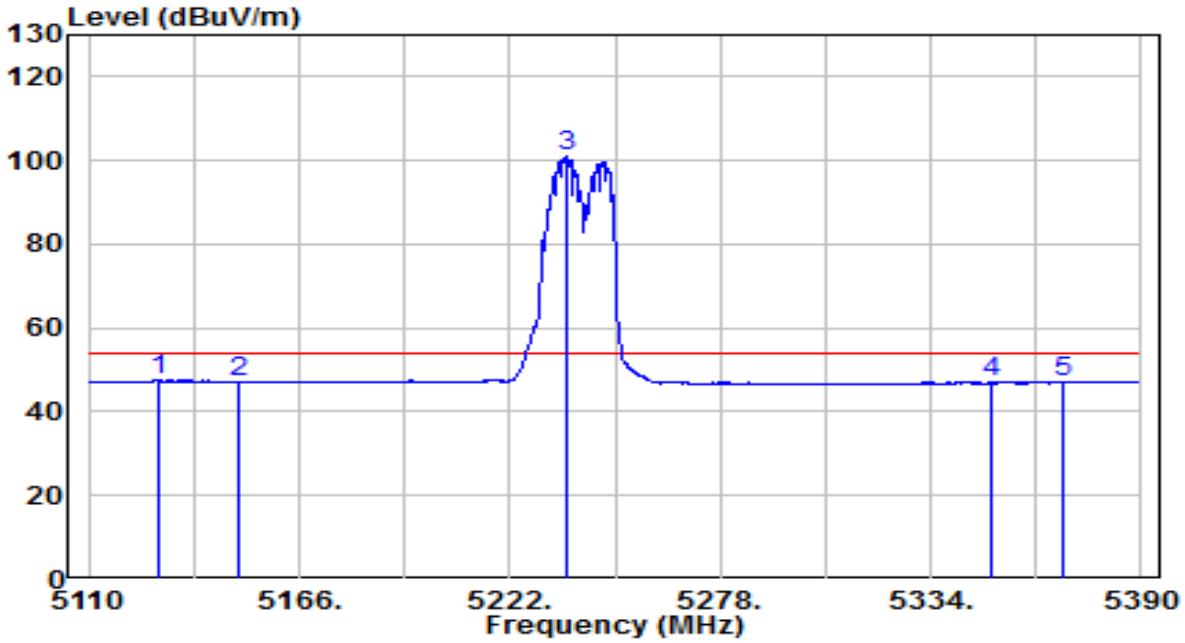


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5128.480	27.55	19.88	47.44	-6.56	54.00	Average
2		5150.040	27.28	19.91	47.19	-6.81	54.00	Average
3		5237.120	80.84	20.00	100.84	N/A	N/A	Average
4		5350.000	26.74	20.11	46.85	-7.15	54.00	Average
5		5369.140	26.97	20.13	47.10	-6.90	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120/60Hz

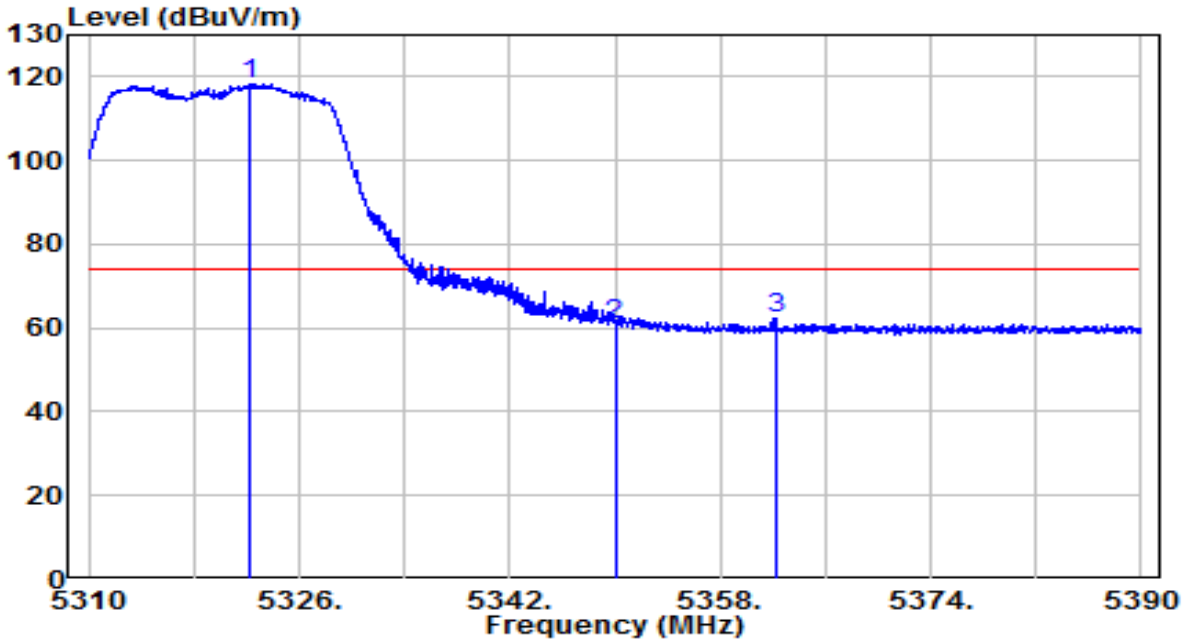


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5322.160	98.29	20.09	118.37	N/A	N/A	Peak
2		5350.000	40.84	20.11	60.95	-13.05	74.00	Peak
3	*	5362.320	42.27	20.13	62.40	-11.60	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120/60Hz

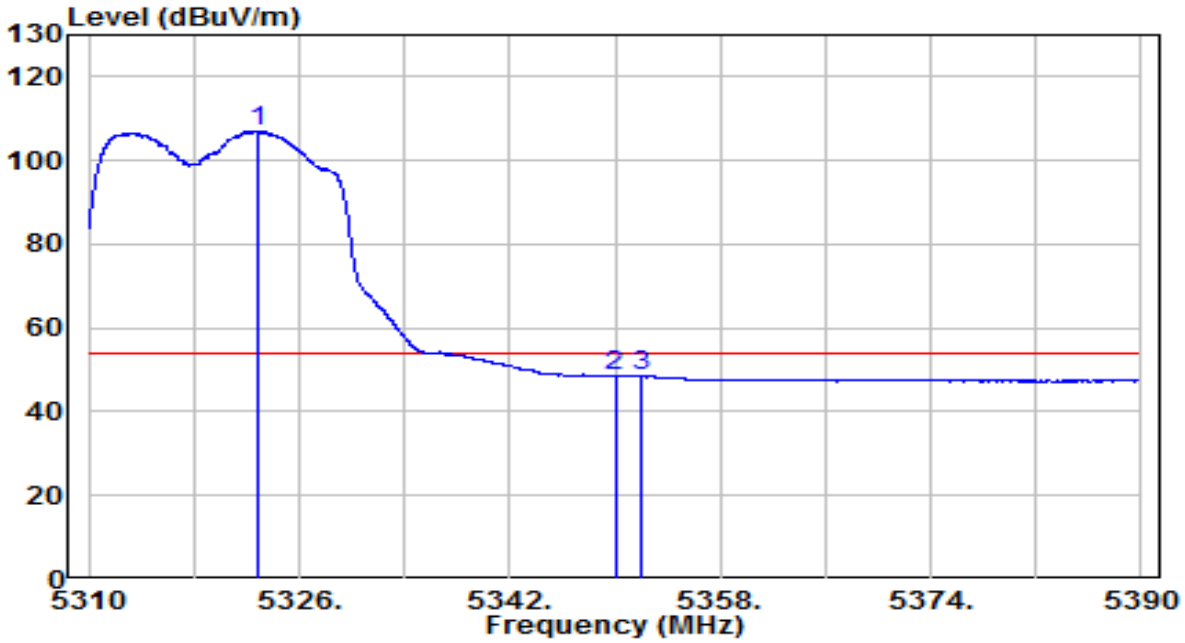


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5322.800	86.90	20.09	106.99	N/A	N/A	Average
2		5350.000	28.43	20.11	48.54	-5.46	54.00	Average
3	*	5352.000	28.46	20.12	48.57	-5.43	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120/60Hz

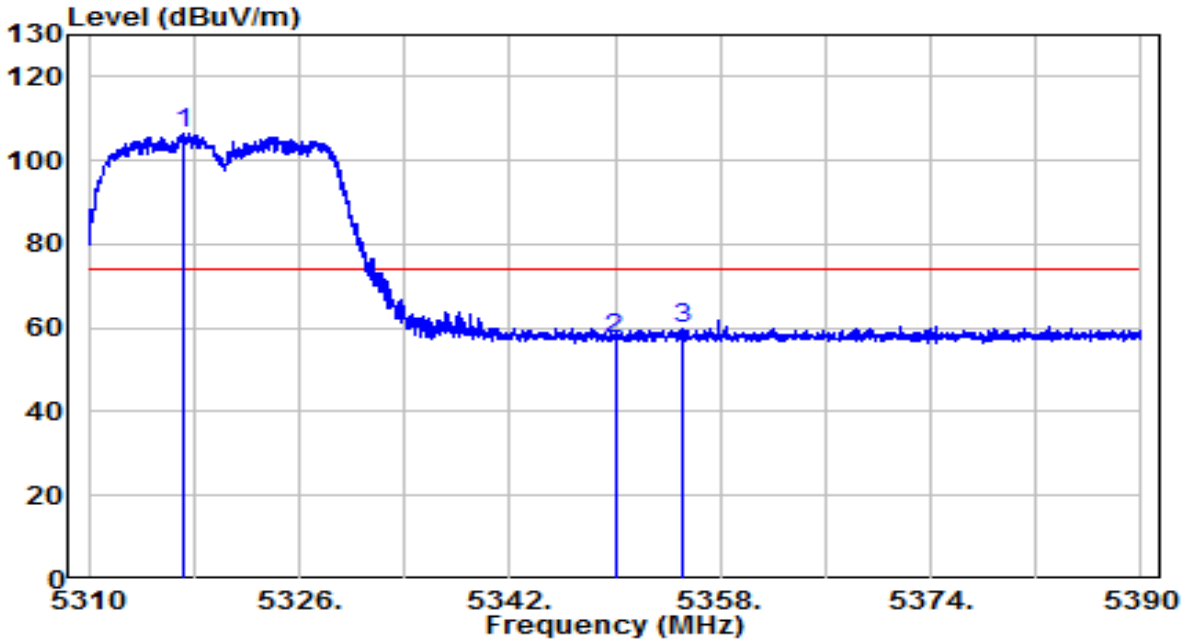


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5317.200	86.41	20.08	106.49	N/A	N/A	Peak
2		5350.000	37.04	20.11	57.15	-16.85	74.00	Peak
3	*	5355.040	39.63	20.12	59.75	-14.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120/60Hz

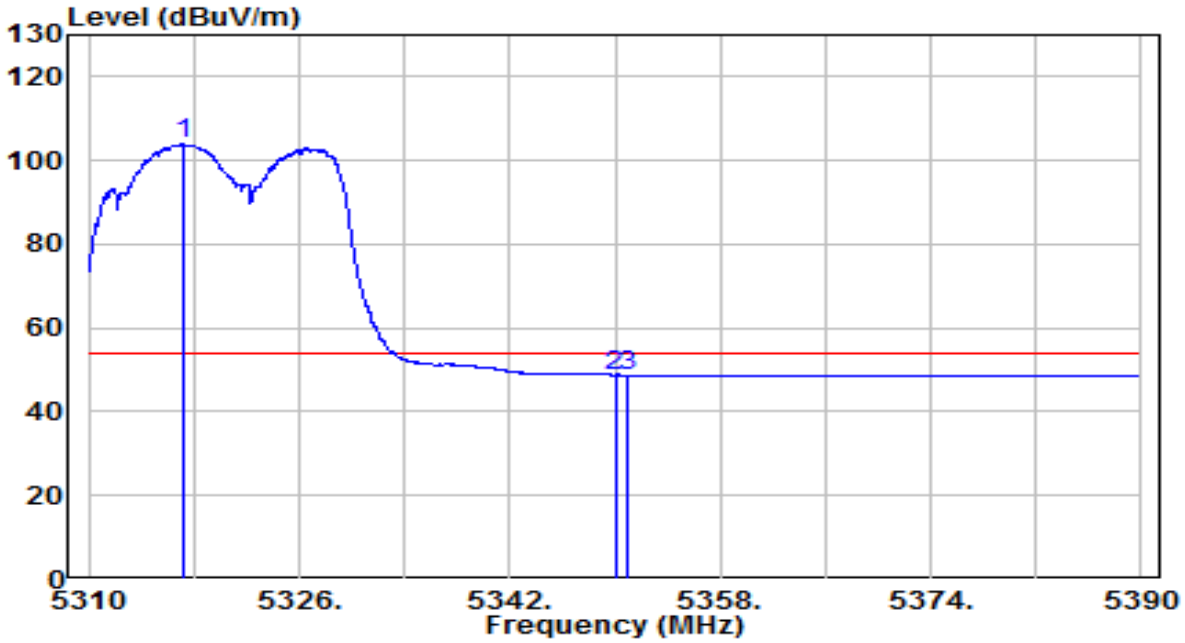


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5317.160	83.81	20.08	103.89	N/A	N/A	Average
2		5350.000	28.65	20.11	48.77	-5.23	54.00	Average
3	*	5351.040	28.67	20.12	48.78	-5.22	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120/60Hz

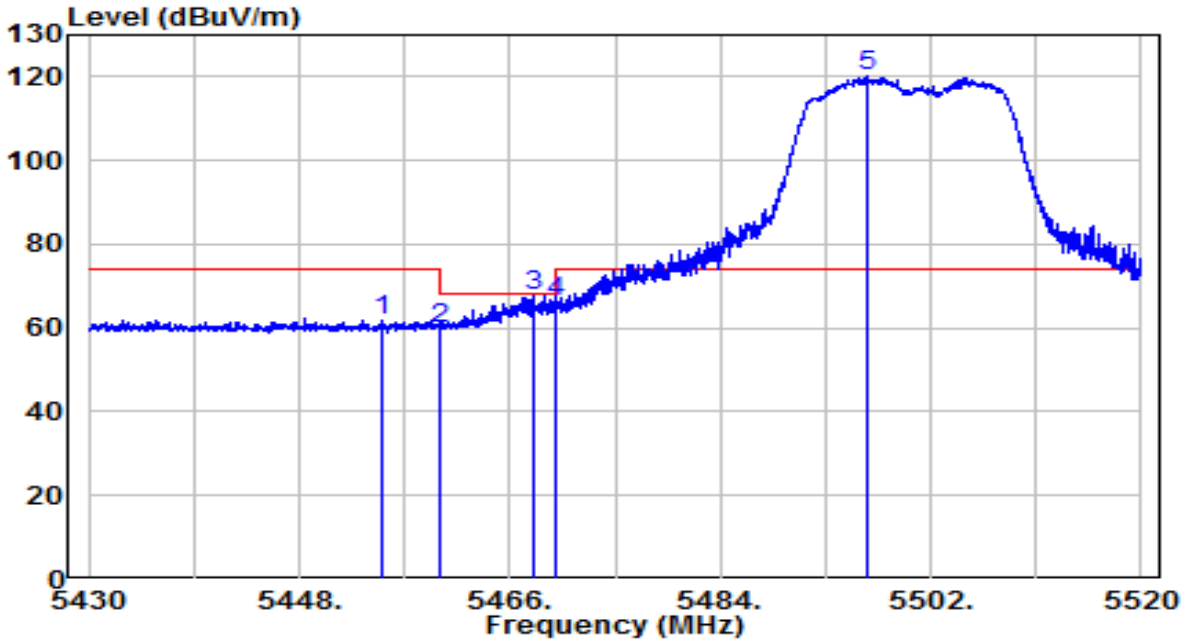


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5454.975	41.53	20.22	61.76	-12.24	74.00	Peak
2		5460.000	39.70	20.23	59.93	-8.27	68.20	Peak
3	*	5468.025	47.64	20.24	67.87	-0.33	68.20	Peak
4		5470.000	46.19	20.24	66.43	-1.77	68.20	Peak
5		5496.555	99.89	20.27	120.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120/60Hz

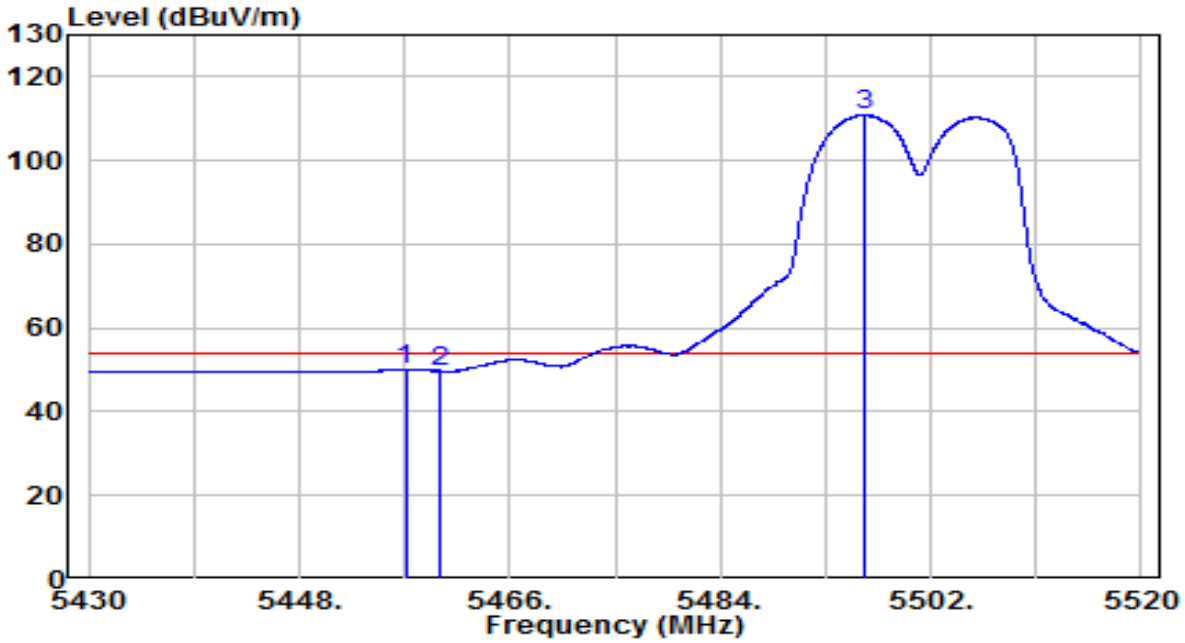


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5457.090	29.94	20.23	50.17	-3.83	54.00	Average
2		5460.000	29.53	20.23	49.76	-4.24	54.00	Average
3		5496.330	90.59	20.27	110.86	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120/60Hz

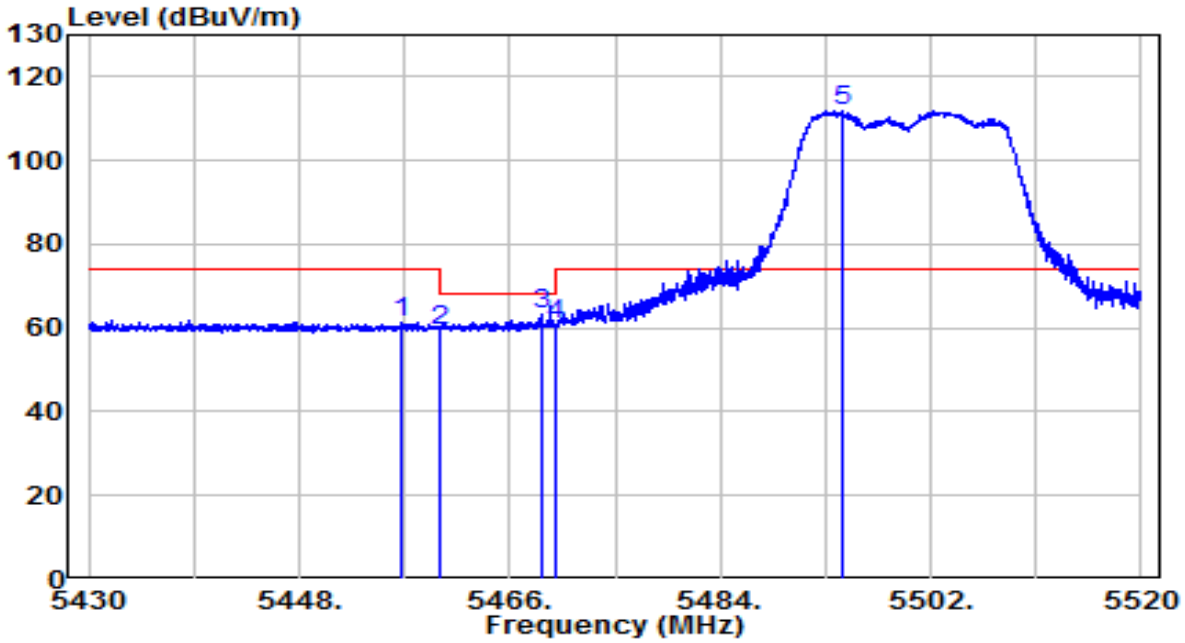

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5456.685	41.00	20.22	61.22	-12.78	74.00	Peak
2		5460.000	38.98	20.23	59.21	-8.99	68.20	Peak
3	*	5468.655	42.94	20.24	63.17	-5.03	68.20	Peak
4		5470.000	40.51	20.24	60.75	-7.45	68.20	Peak
5		5494.350	91.64	20.26	111.90	N/A	N/A	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120/60Hz

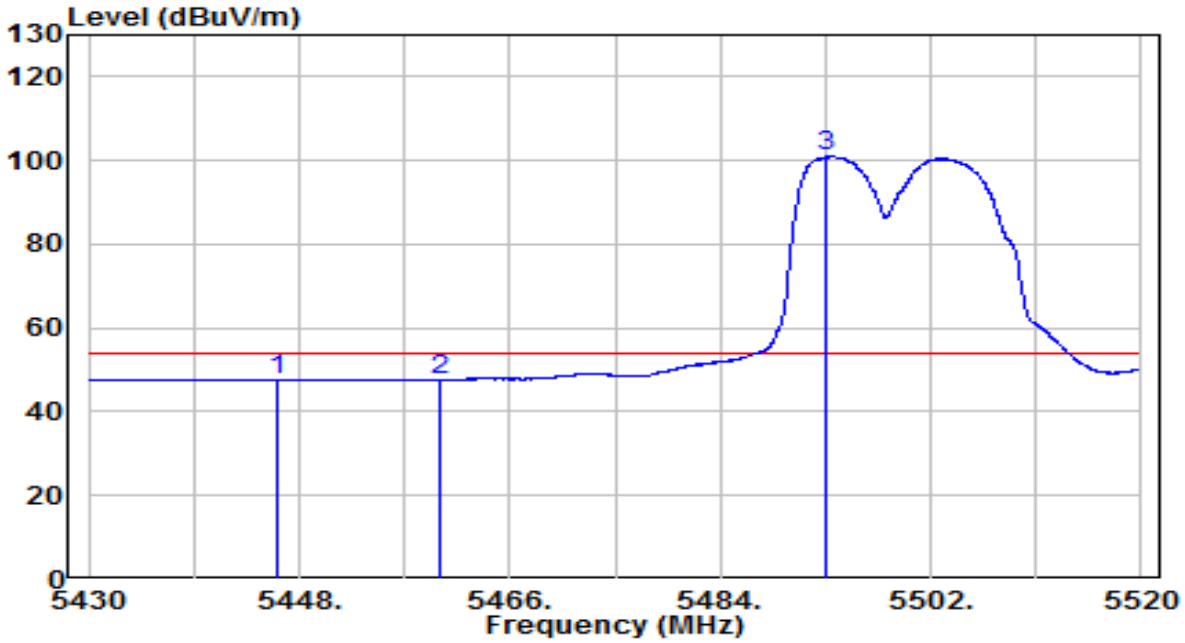


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5446.110	27.45	20.21	47.66	-6.34	54.00	Average
2		5460.000	27.37	20.23	47.60	-6.40	54.00	Average
3		5493.045	80.78	20.26	101.04	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	120/60Hz

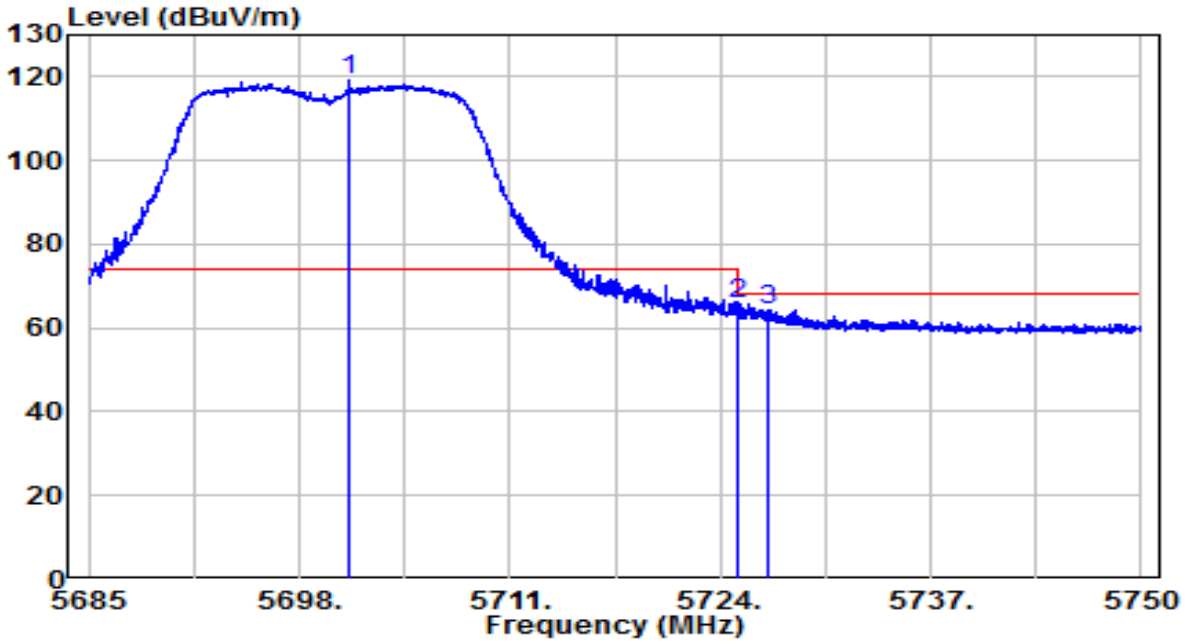


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5701.152	98.13	20.92	119.05	N/A	N/A	Peak
2	*	5725.000	44.66	21.00	65.66	-2.54	68.20	Peak
3		5726.925	43.41	21.01	64.41	-3.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	120/60Hz

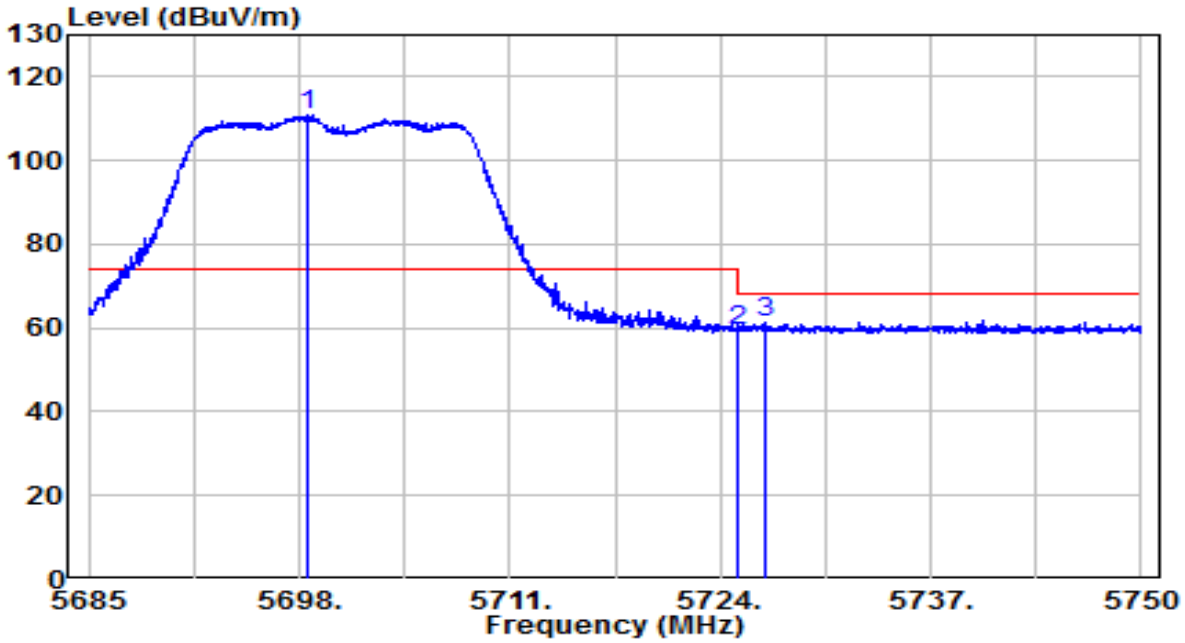


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5698.520	90.08	20.91	110.99	N/A	N/A	Peak
2		5725.000	38.28	21.00	59.28	-8.92	68.20	Peak
3	*	5726.860	40.13	21.01	61.14	-7.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	120/60Hz

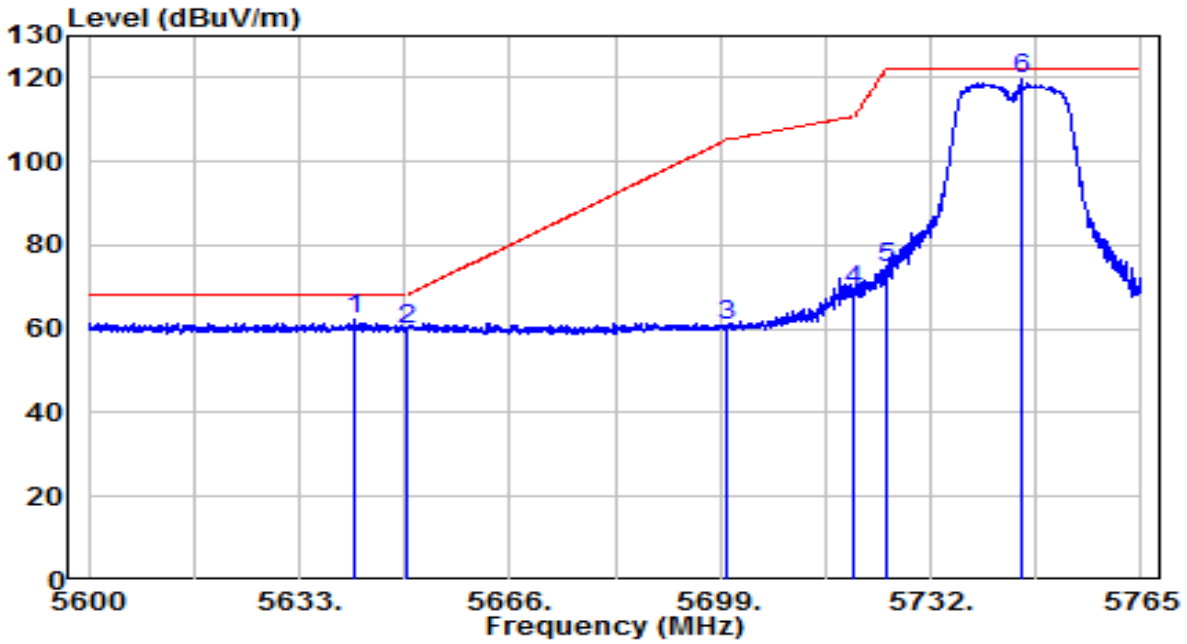


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5641.828	41.38	20.73	62.11	-6.09	68.20	Peak
2		5650.000	39.26	20.76	60.02	-8.18	68.20	Peak
3		5700.000	39.83	20.92	60.74	-44.46	105.20	Peak
4		5720.000	48.02	20.98	69.00	-41.80	110.80	Peak
5		5725.000	53.61	21.00	74.61	-47.59	122.20	Peak
6		5746.107	98.46	21.07	119.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	120/60Hz

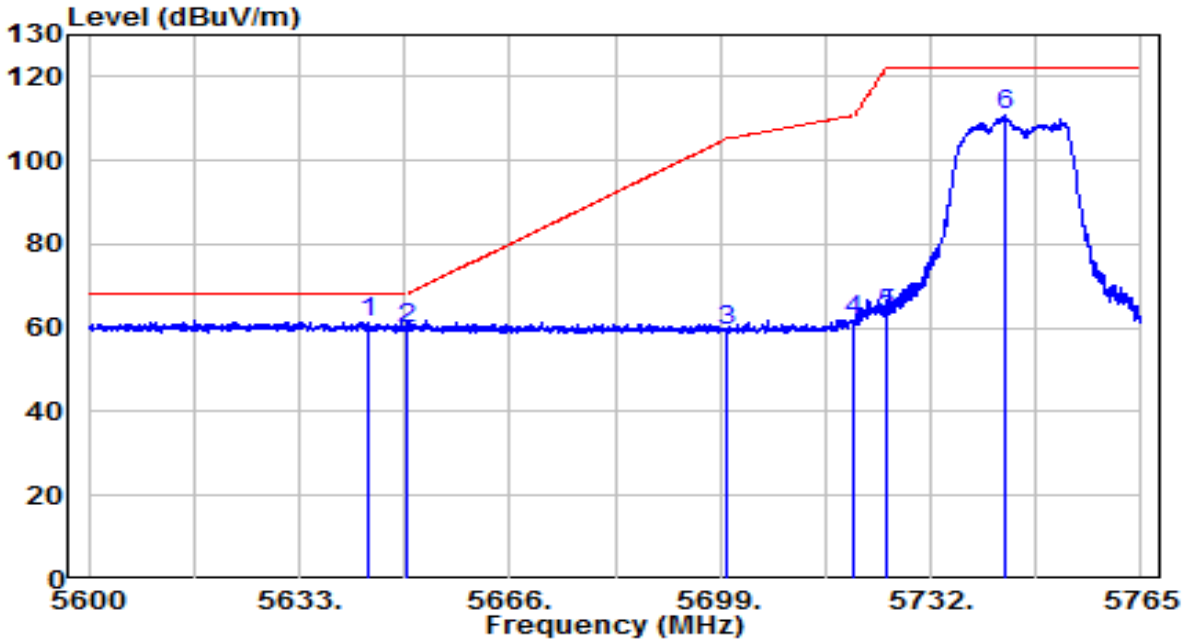


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5643.808	40.73	20.74	61.47	-6.73	68.20	Peak
2		5650.000	39.13	20.76	59.88	-8.32	68.20	Peak
3		5700.000	38.38	20.92	59.30	-45.90	105.20	Peak
4		5720.000	40.77	20.98	61.75	-49.05	110.80	Peak
5		5725.000	42.32	21.00	63.32	-58.88	122.20	Peak
6		5743.797	89.58	21.06	110.64	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	120/60Hz

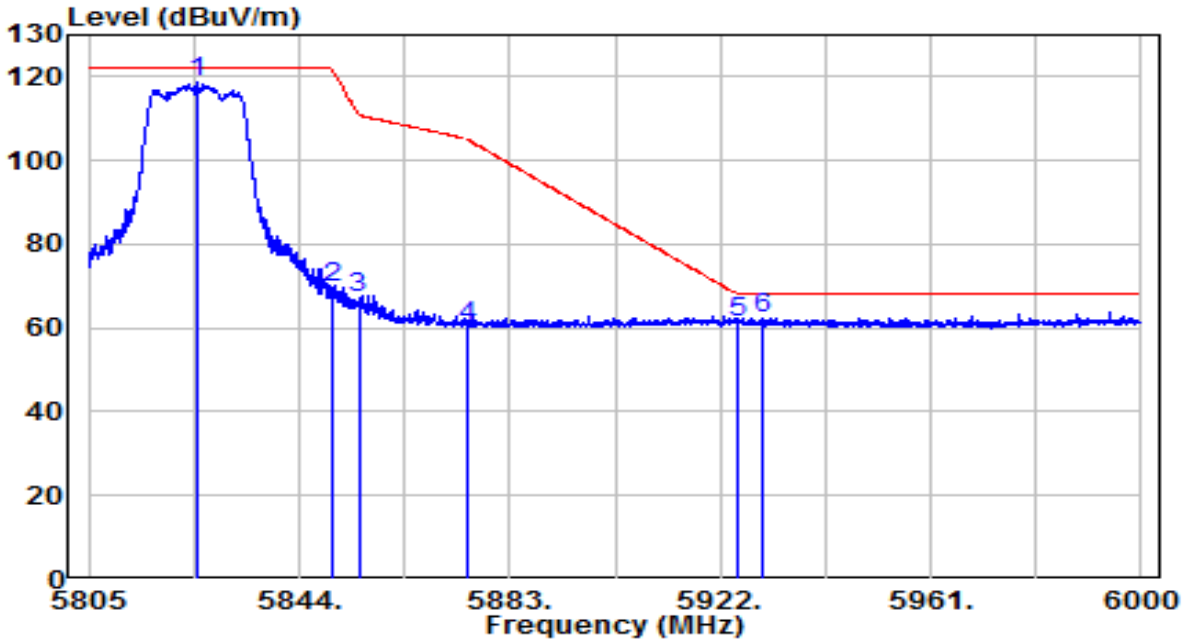


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5825.280	97.16	21.32	118.48	N/A	N/A	Peak
2		5850.045	48.42	21.40	69.83	-52.27	122.10	Peak
3		5855.000	45.81	21.42	67.23	-43.57	110.80	Peak
4		5875.000	38.93	21.49	60.41	-44.79	105.20	Peak
5		5925.000	39.76	21.65	61.40	-6.80	68.20	Peak
6	*	5929.703	40.84	21.66	62.50	-5.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	120/60Hz

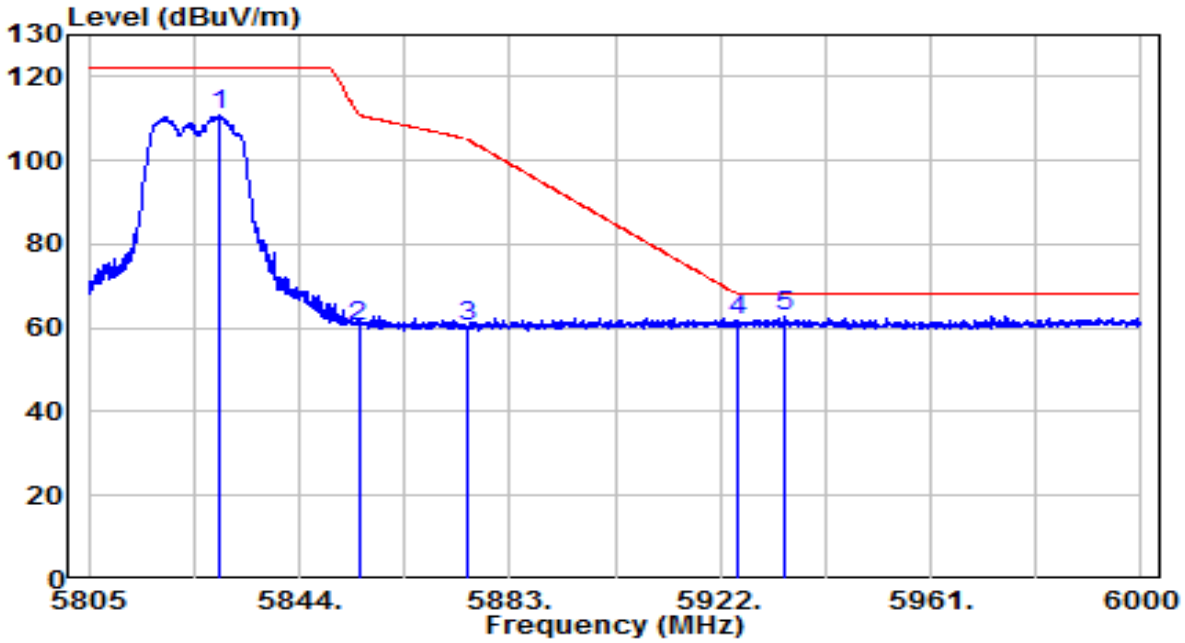


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5829.277	89.35	21.34	110.68	N/A	N/A	Peak
2		5855.000	39.08	21.42	60.50	-50.30	110.80	Peak
3		5875.000	38.70	21.49	60.19	-45.01	105.20	Peak
4		5925.000	40.02	21.65	61.67	-6.53	68.20	Peak
5	*	5933.993	41.13	21.68	62.81	-5.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120/60Hz

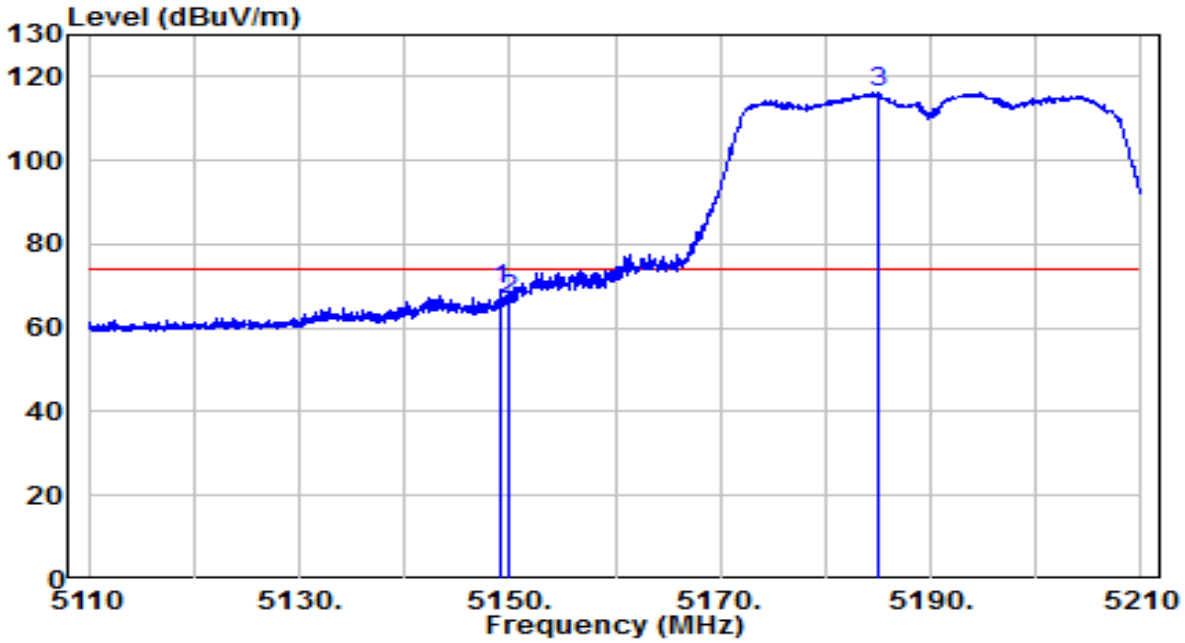


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5149.100	49.34	19.91	69.24	-4.76	74.00	Peak
2		5150.000	46.59	19.91	66.50	-7.50	74.00	Peak
3		5184.900	96.36	19.94	116.30	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120/60Hz

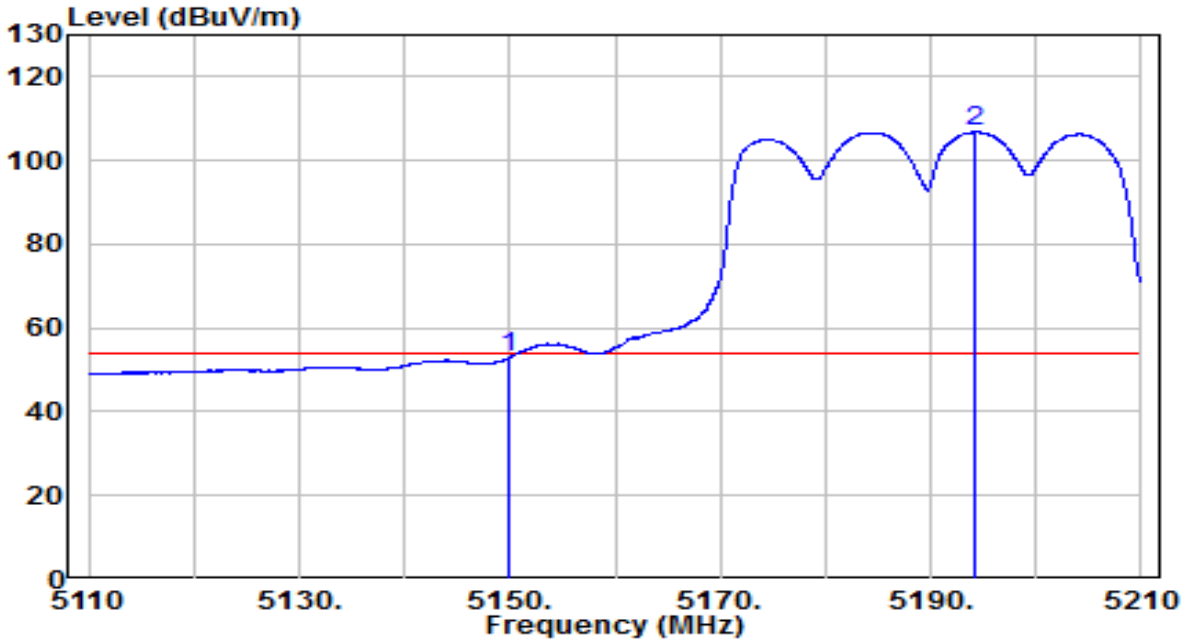


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	33.04	19.91	52.94	-1.06	54.00	Average
2		5194.250	86.86	19.95	106.82	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120/60Hz

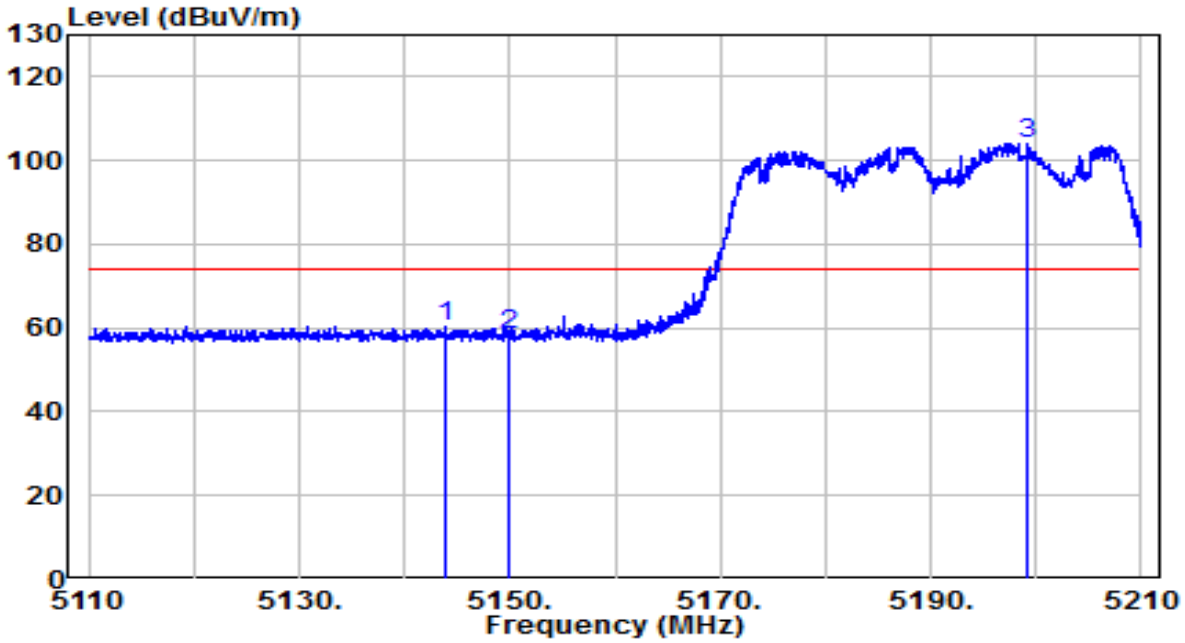


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5143.950	40.37	19.90	60.27	-13.73	74.00	Peak
2		5150.000	38.24	19.91	58.14	-15.86	74.00	Peak
3		5199.150	84.23	19.96	104.19	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120/60Hz

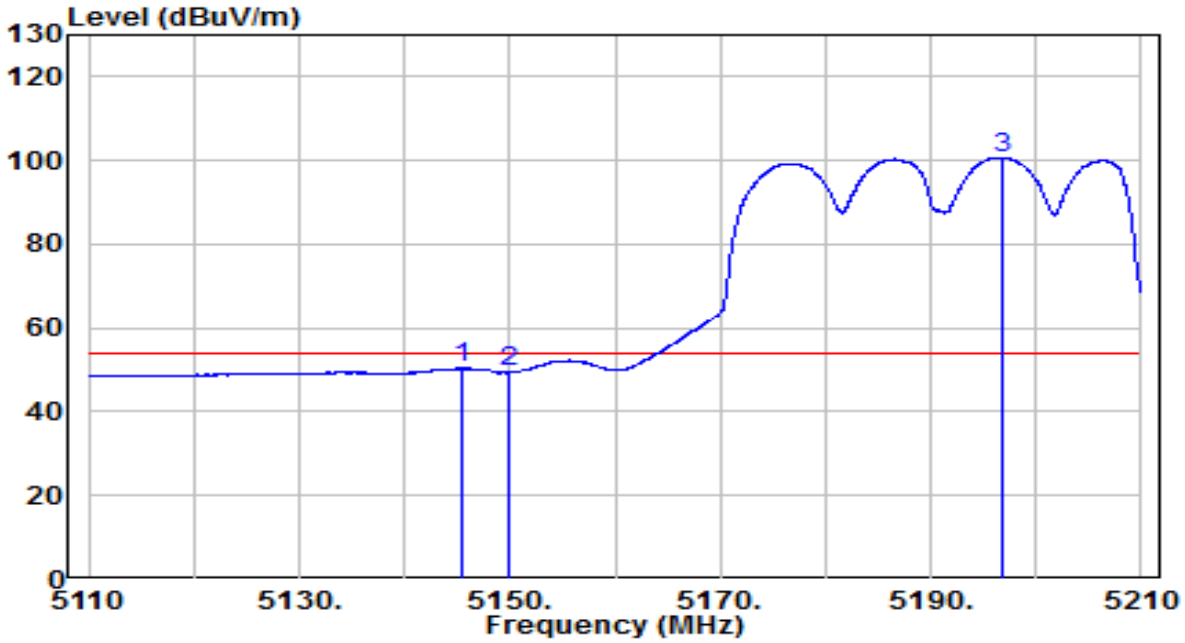


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5145.400	30.43	19.90	50.33	-3.67	54.00	Average
2		5150.000	29.41	19.91	49.32	-4.68	54.00	Average
3		5196.700	80.79	19.95	100.75	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	120/60Hz

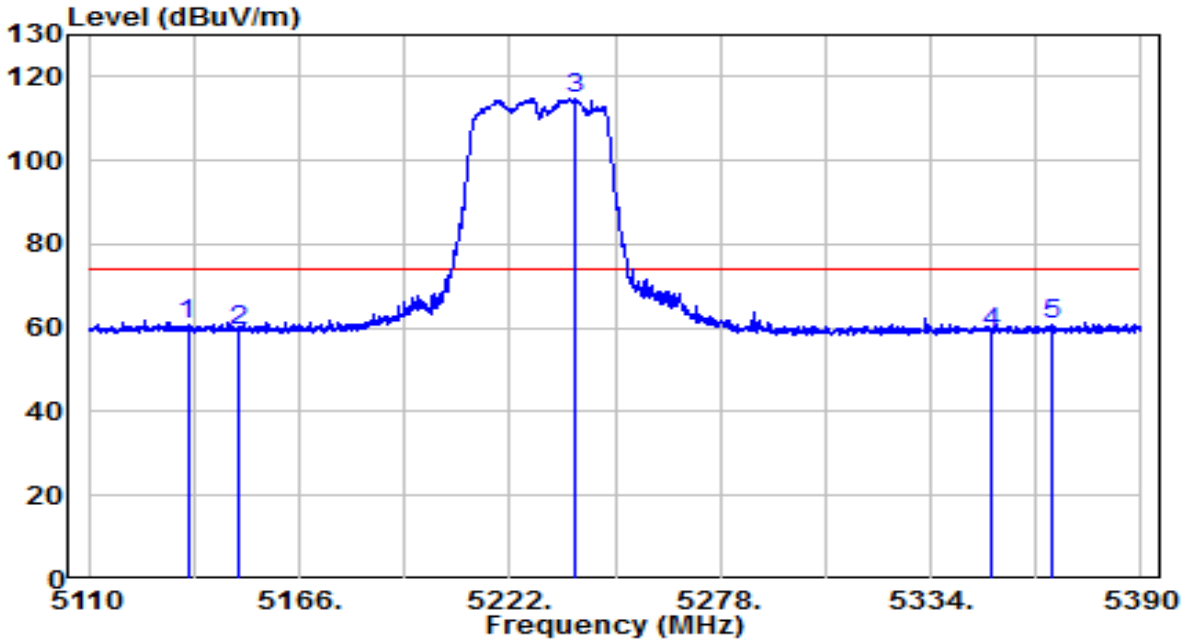


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5136.320	41.02	19.89	60.91	-13.09	74.00	Peak
2		5150.000	39.62	19.91	59.52	-14.48	74.00	Peak
3		5239.360	95.02	20.00	115.01	N/A	N/A	Peak
4		5350.000	38.76	20.11	58.88	-15.12	74.00	Peak
5		5366.620	40.63	20.13	60.76	-13.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	120/60Hz

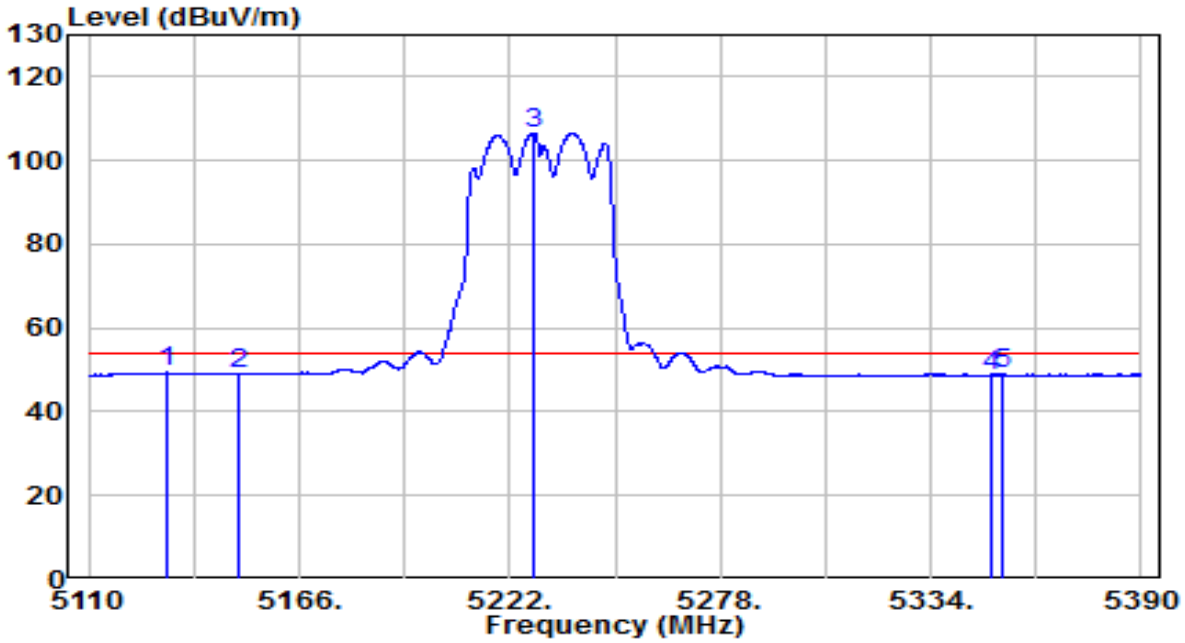


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5131.000	29.43	19.89	49.31	-4.69	54.00	Average
2		5150.000	29.17	19.91	49.07	-4.93	54.00	Average
3		5228.160	86.56	19.99	106.55	N/A	N/A	Average
4		5350.000	28.67	20.11	48.78	-5.22	54.00	Average
5		5353.040	28.79	20.12	48.90	-5.10	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	120/60Hz

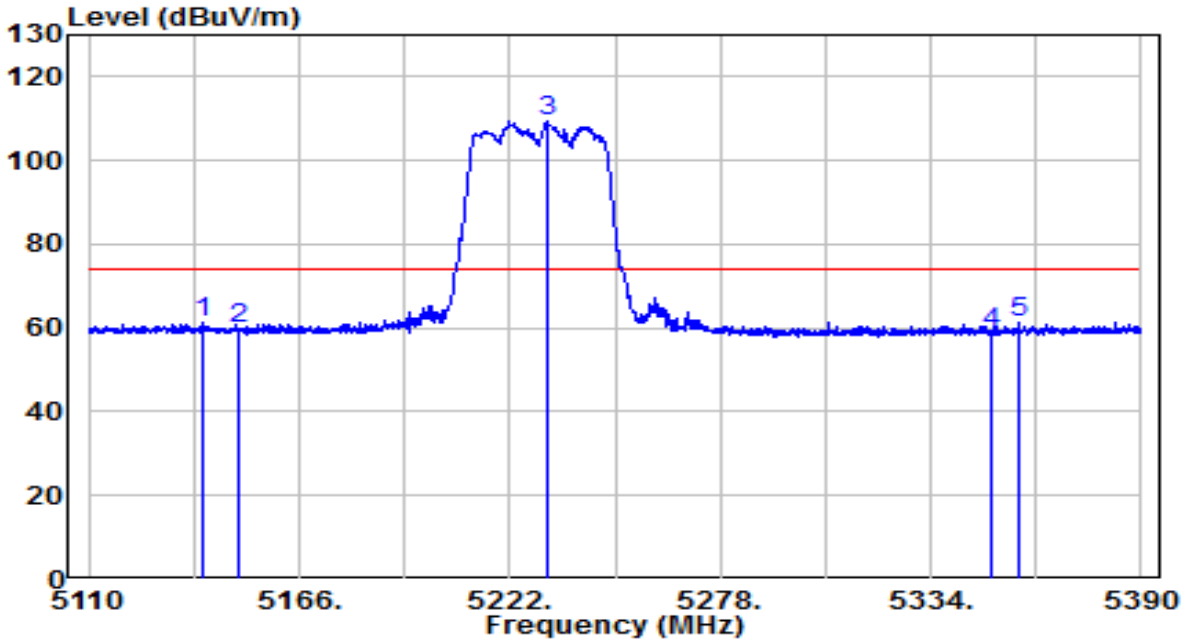


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5140.240	41.31	19.90	61.20	-12.80	74.00	Peak
2		5150.000	39.98	19.91	59.88	-14.12	74.00	Peak
3		5231.800	89.42	19.99	109.41	N/A	N/A	Peak
4		5350.000	38.93	20.11	59.05	-14.95	74.00	Peak
5		5357.240	41.05	20.12	61.18	-12.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	120/60Hz

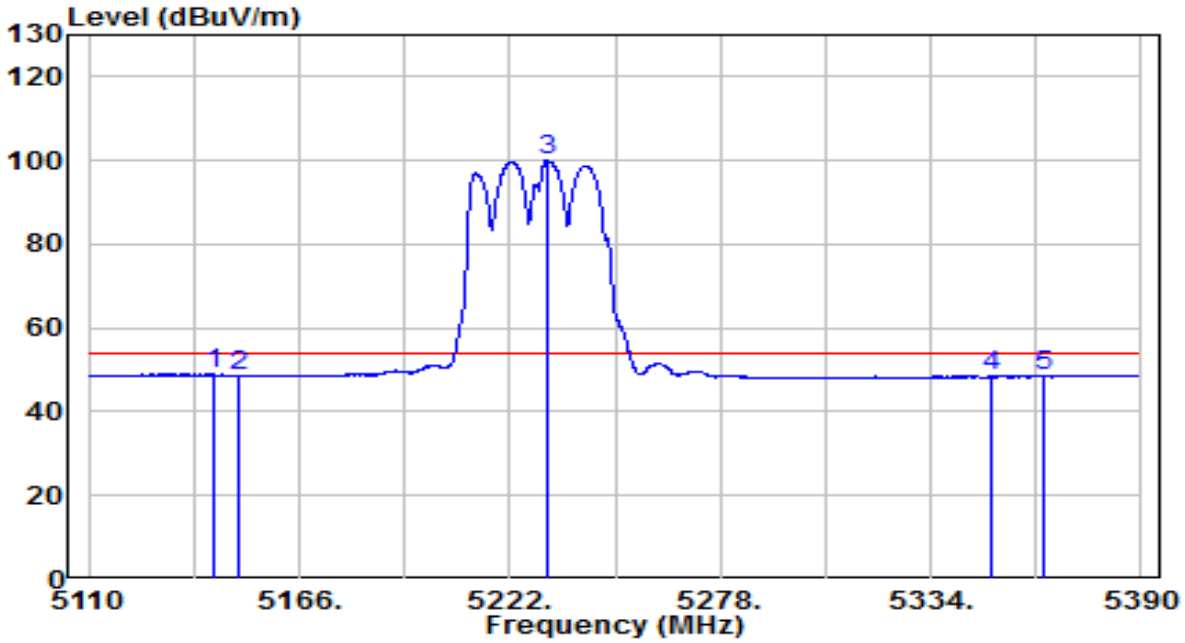


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5143.320	28.97	19.90	48.87	-5.13	54.00	Average
2		5150.000	28.73	19.91	48.64	-5.36	54.00	Average
3		5231.800	79.85	19.99	99.84	N/A	N/A	Average
4		5350.000	28.30	20.11	48.41	-5.59	54.00	Average
5		5363.820	28.41	20.13	48.54	-5.46	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120/60Hz

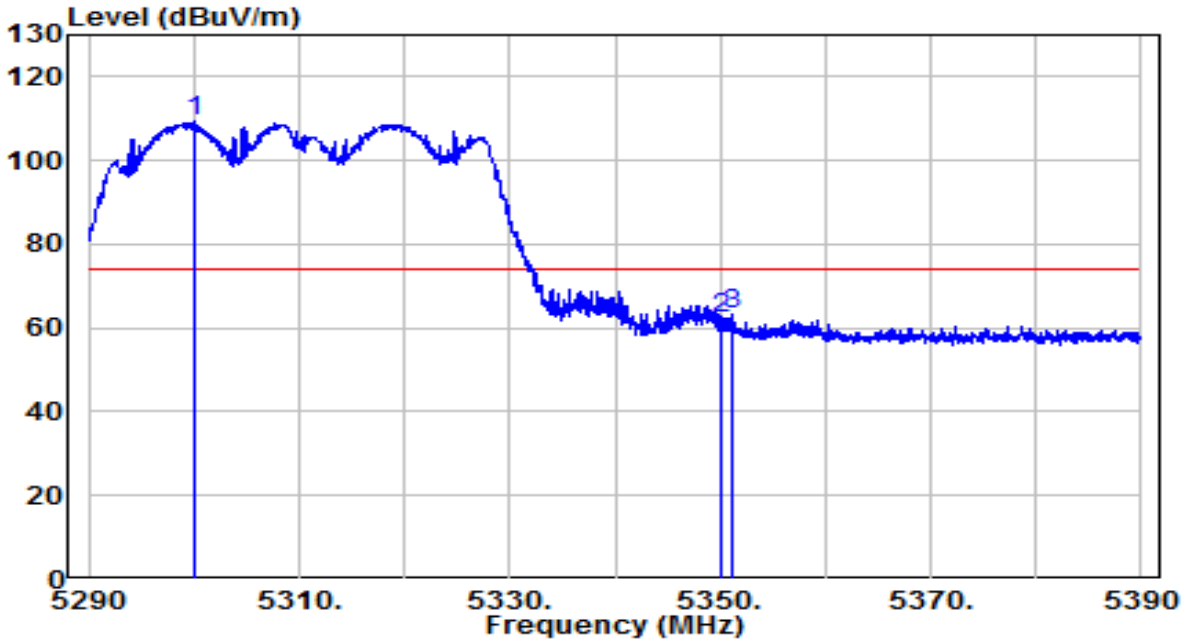


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5300.150	89.39	20.06	109.45	N/A	N/A	Peak
2		5350.000	42.33	20.11	62.44	-11.56	74.00	Peak
3	*	5351.100	42.96	20.12	63.07	-10.93	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120/60Hz

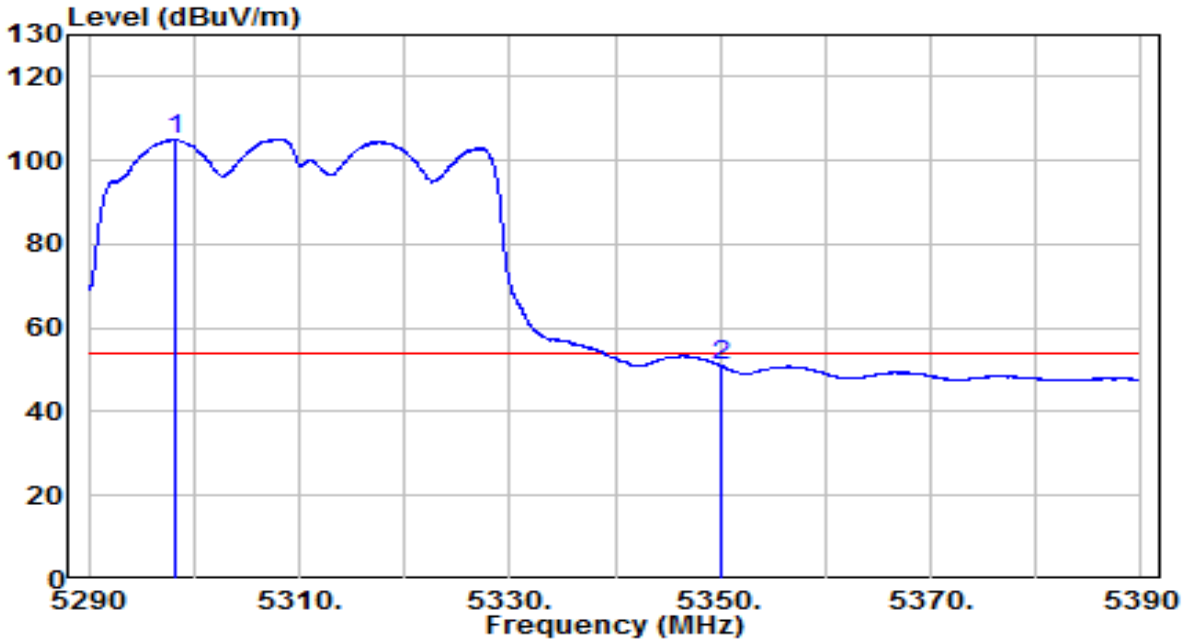


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5298.300	84.86	20.06	104.92	N/A	N/A	Average
2	*	5350.000	30.85	20.11	50.96	-3.04	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120/60Hz

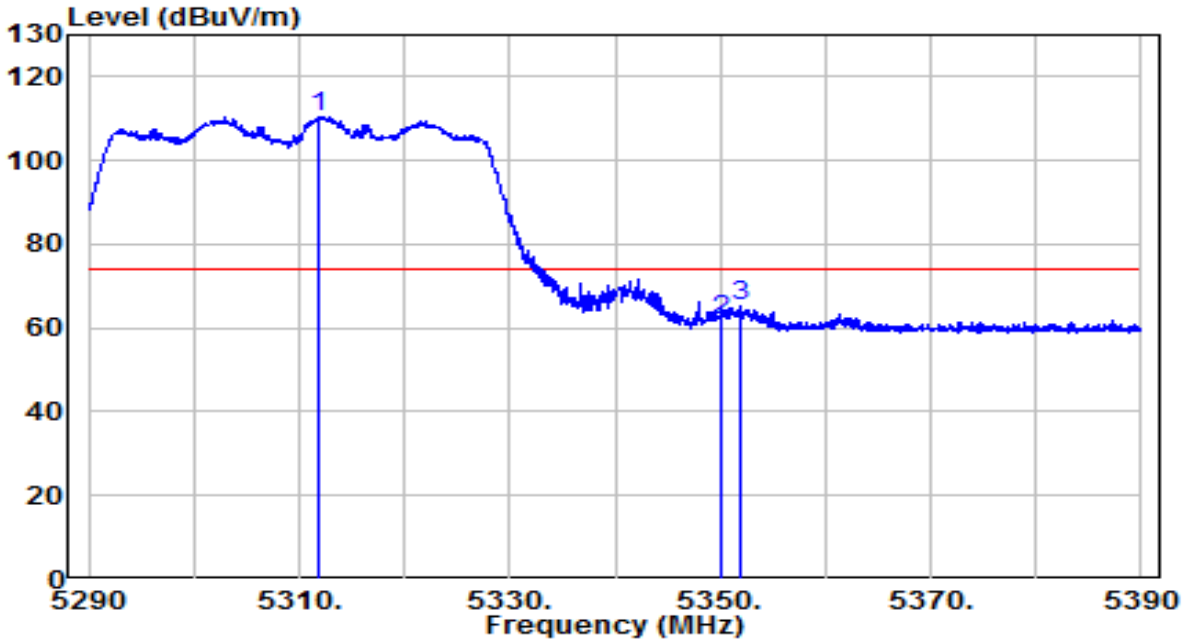


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5311.900	90.45	20.07	110.53	N/A	N/A	Peak
2		5350.000	41.78	20.11	61.90	-12.10	74.00	Peak
3	*	5351.850	45.04	20.12	65.16	-8.84	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120/60Hz

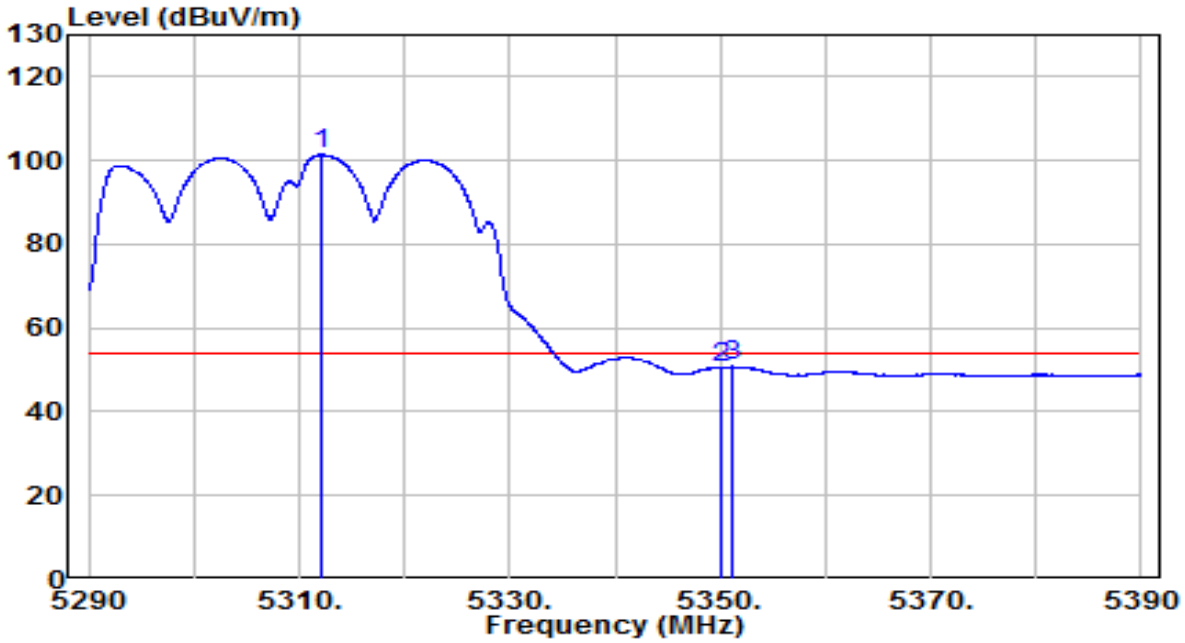


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5312.200	81.27	20.07	101.34	N/A	N/A	Average
2		5350.000	30.63	20.11	50.75	-3.25	54.00	Average
3	*	5351.250	30.68	20.12	50.80	-3.20	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	110V/60Hz

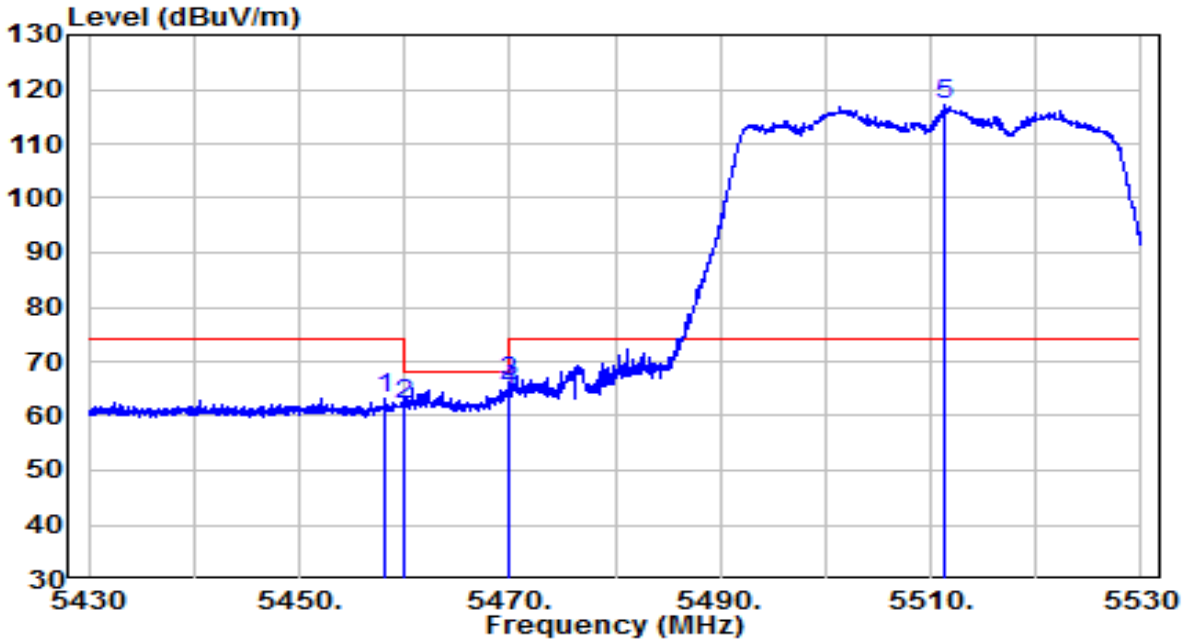

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5458.250	42.98	20.23	63.21	-10.79	74.00	Peak
2		5460.000	41.80	20.23	62.03	-6.17	68.20	Peak
3	*	5469.800	46.11	20.24	66.35	-1.85	68.20	Peak
4		5470.000	44.48	20.24	64.72	-3.48	68.20	Peak
5		5511.400	96.76	20.31	117.06	N/A	N/A	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	110V/60Hz

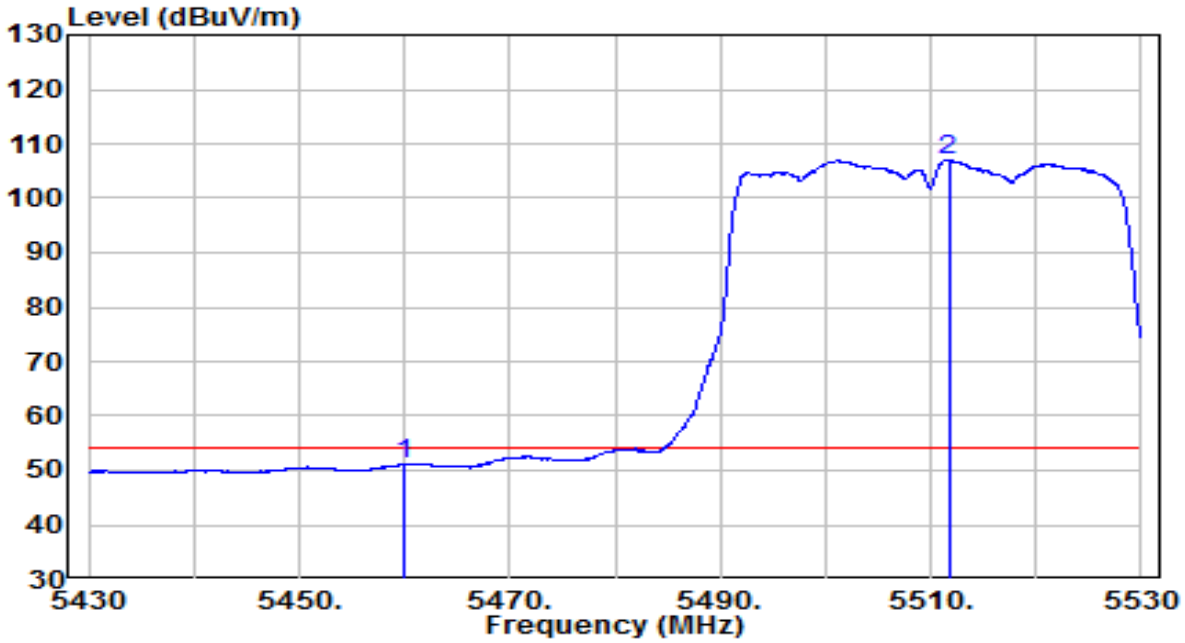


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5460.000	30.86	20.23	51.08	-2.92	54.00	Average
2		5511.700	86.78	20.31	107.09	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	110V/60Hz

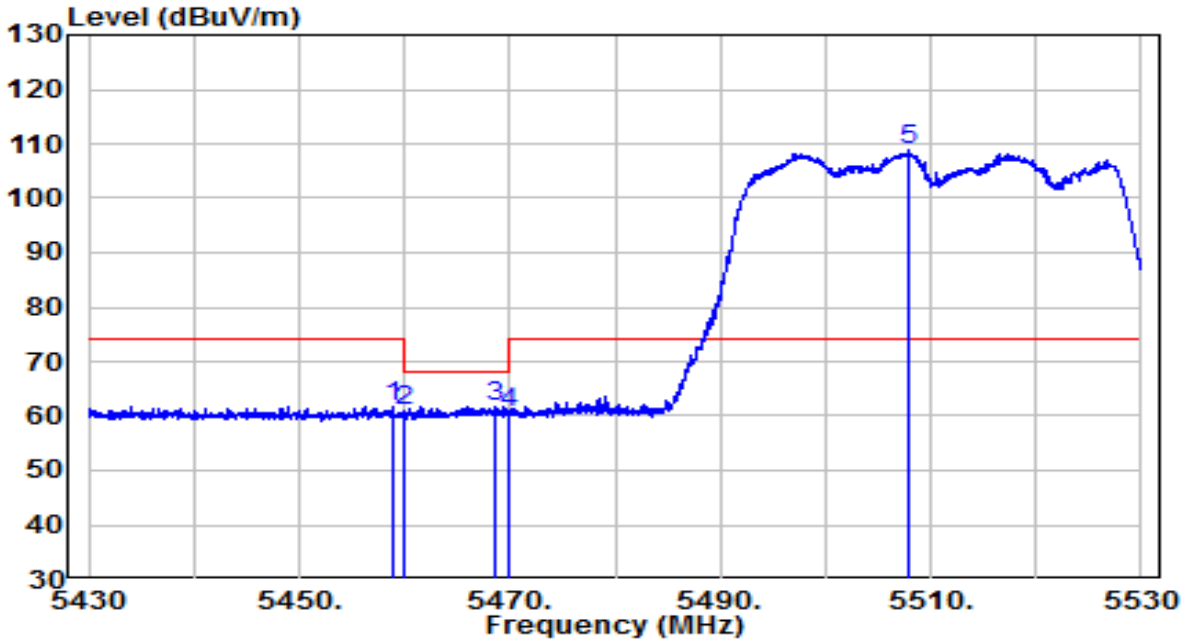


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5458.850	41.54	20.23	61.77	-12.23	74.00	Peak
2		5460.000	40.69	20.23	60.92	-7.28	68.20	Peak
3	*	5468.500	41.56	20.24	61.80	-6.40	68.20	Peak
4		5470.000	40.32	20.24	60.56	-7.64	68.20	Peak
5		5507.850	88.41	20.30	108.70	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	110V/60Hz

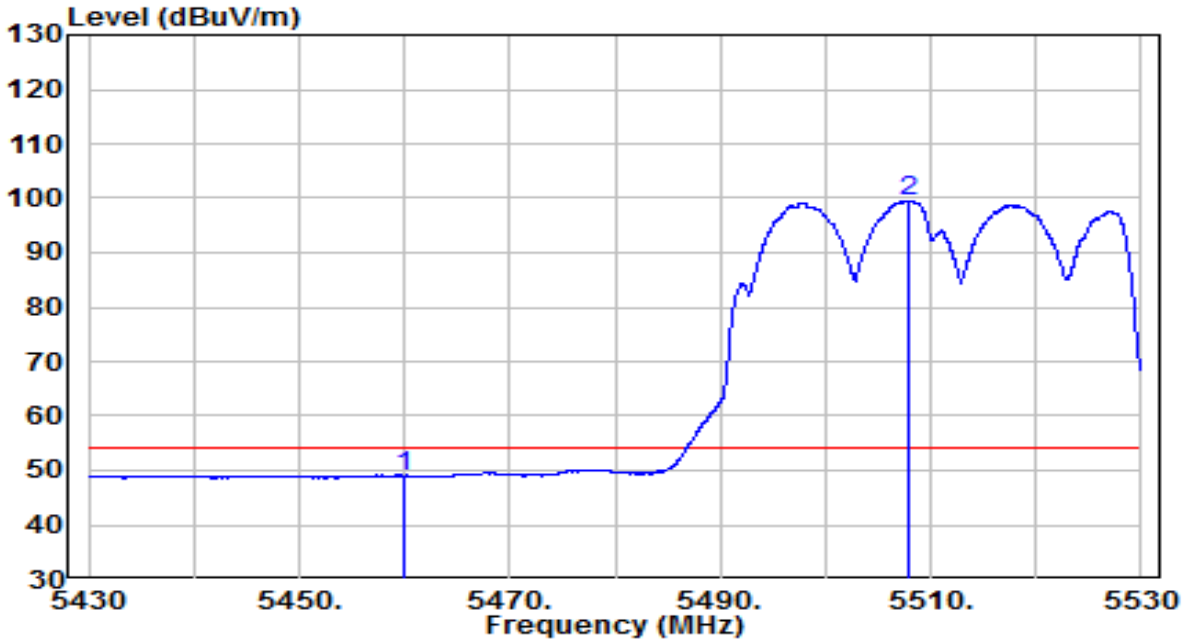


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5460.000	28.72	20.23	48.95	-5.05	54.00	Average
2		5507.950	79.26	20.30	99.55	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	110V/60Hz

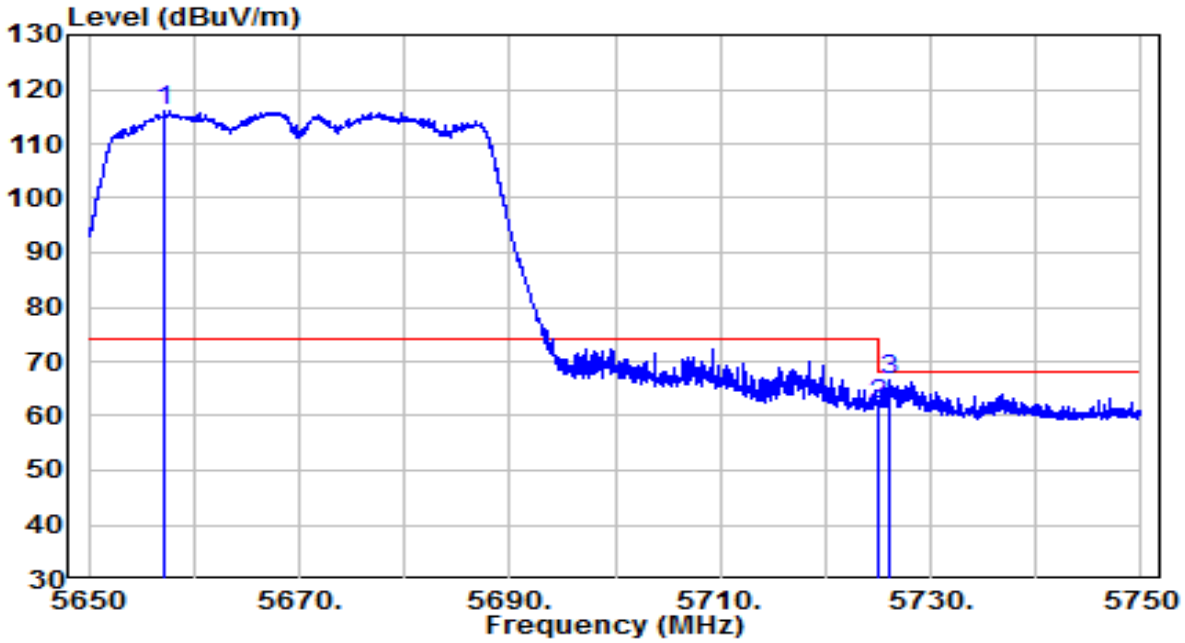


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5657.250	95.38	20.78	116.16	N/A	N/A	Peak
2		5725.000	40.98	21.00	61.98	-6.22	68.20	Peak
3	*	5726.100	45.72	21.00	66.72	-1.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	110V/60Hz

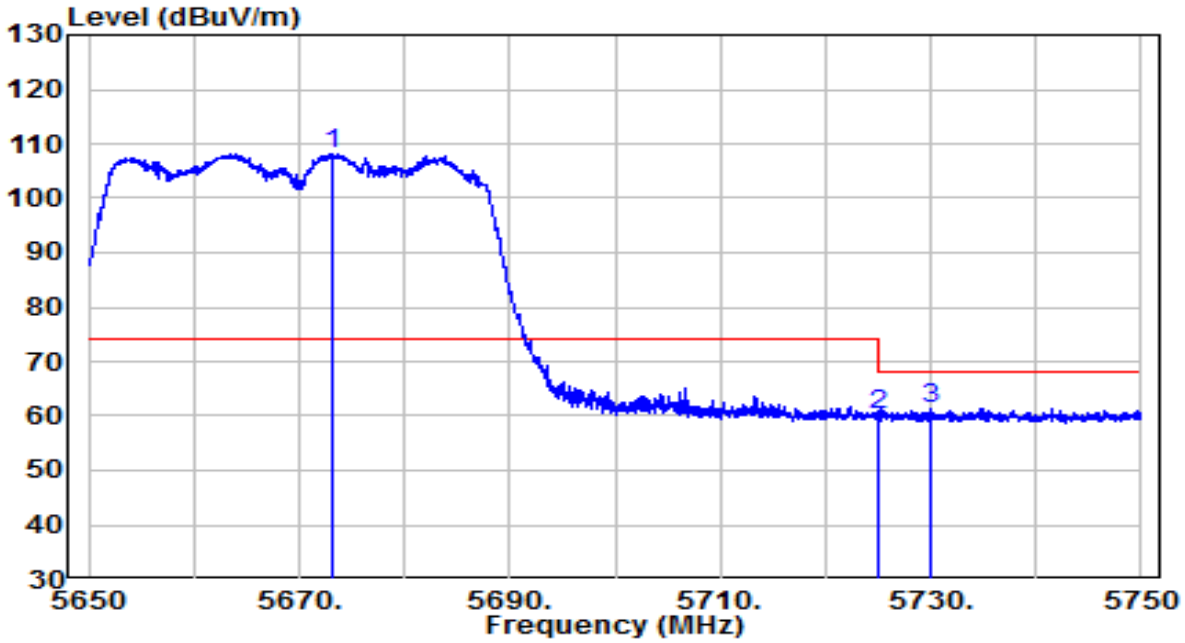


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5673.100	87.26	20.83	108.09	N/A	N/A	Peak
2		5725.000	39.14	21.00	60.14	-8.06	68.20	Peak
3	*	5730.000	40.31	21.02	61.33	-6.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	110V/60Hz

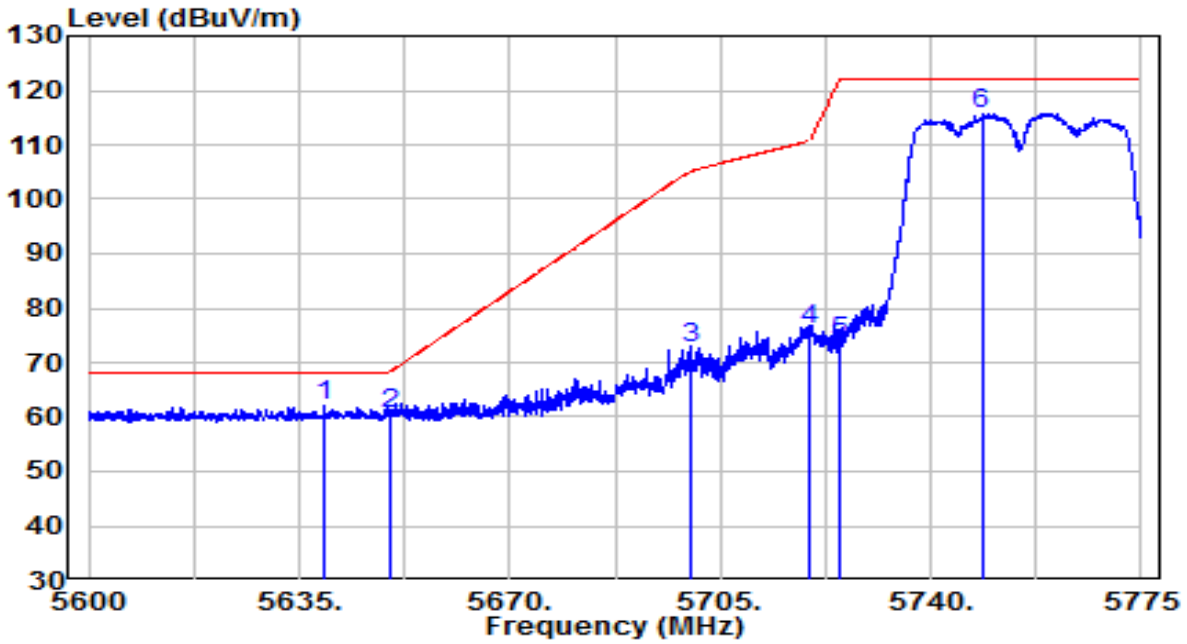


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5639.200	41.28	20.72	62.00	-6.20	68.20	Peak
2		5650.000	39.95	20.76	60.70	-7.50	68.20	Peak
3		5700.013	51.75	20.92	72.66	-32.54	105.20	Peak
4		5720.000	55.16	20.98	76.14	-34.66	110.80	Peak
5		5725.000	52.61	21.00	73.61	-48.59	122.20	Peak
6		5748.487	94.73	21.08	115.81	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	110V/60Hz

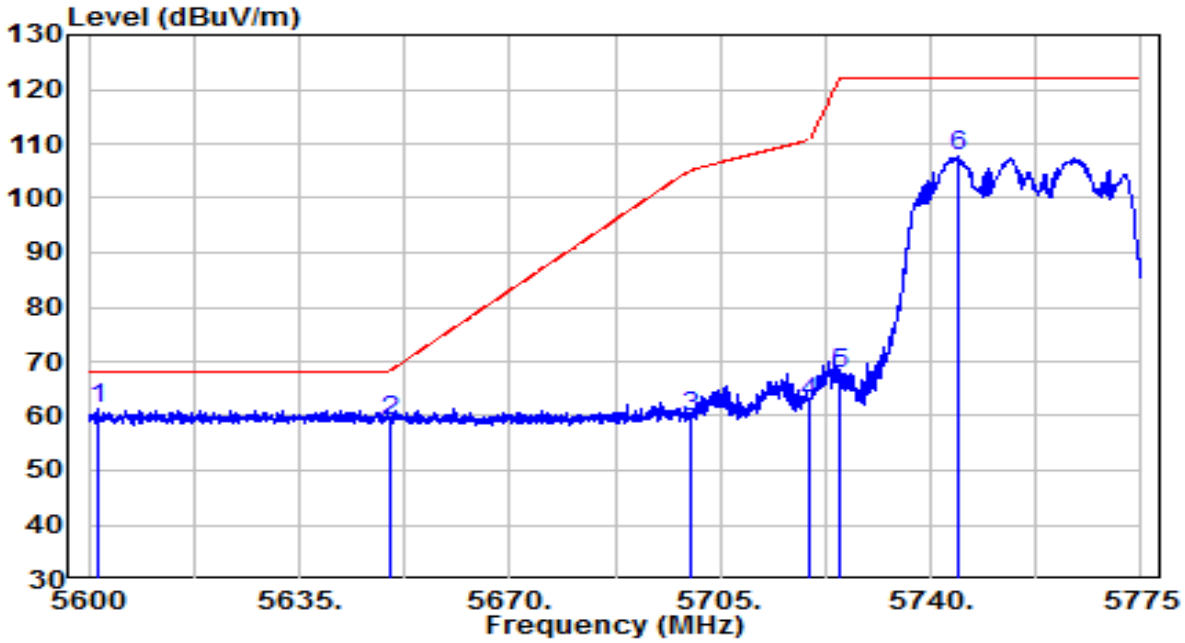


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5601.575	40.64	20.60	61.24	-6.96	68.20	Peak
2		5650.000	38.18	20.76	58.93	-9.27	68.20	Peak
3		5700.000	38.89	20.92	59.81	-45.39	105.20	Peak
4		5720.000	41.65	20.98	62.63	-48.17	110.80	Peak
5		5725.000	46.86	21.00	67.86	-54.34	122.20	Peak
6		5744.462	86.58	21.06	107.64	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	110V/60Hz

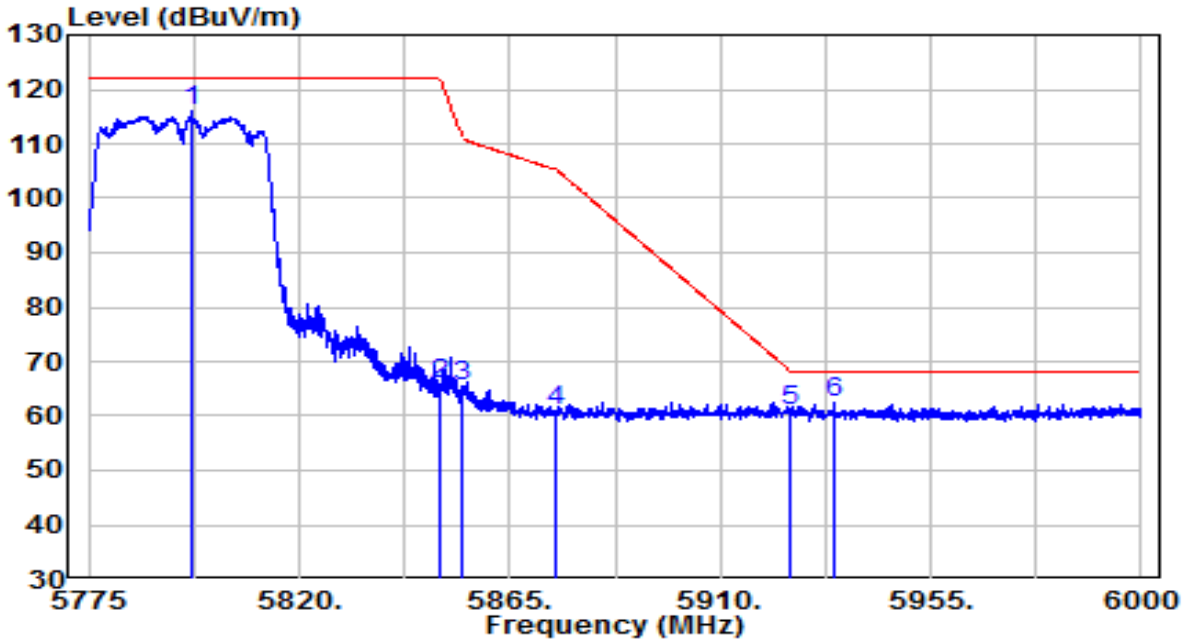


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5797.050	94.81	21.23	116.05	N/A	N/A	Peak
2		5850.000	44.34	21.40	65.75	-56.45	122.20	Peak
3		5855.000	43.97	21.42	65.39	-45.41	110.80	Peak
4		5875.000	39.31	21.49	60.80	-44.40	105.20	Peak
5		5925.000	39.29	21.65	60.94	-7.26	68.20	Peak
6	*	5934.413	40.68	21.68	62.35	-5.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	110V/60Hz

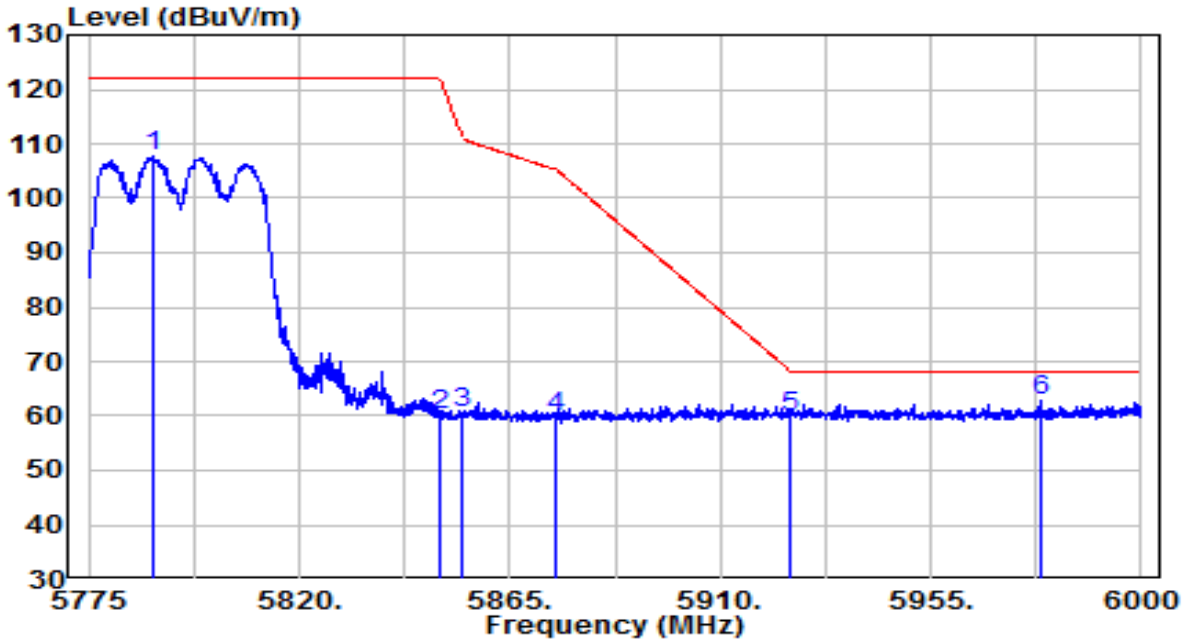


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5788.837	86.43	21.21	107.64	N/A	N/A	Peak
2		5850.000	38.77	21.40	60.17	-62.03	122.20	Peak
3		5855.000	39.00	21.42	60.42	-50.38	110.80	Peak
4		5875.000	38.43	21.49	59.91	-45.29	105.20	Peak
5		5925.000	38.33	21.65	59.97	-8.23	68.20	Peak
6	*	5978.850	40.94	21.82	62.76	-5.44	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	110V/60Hz

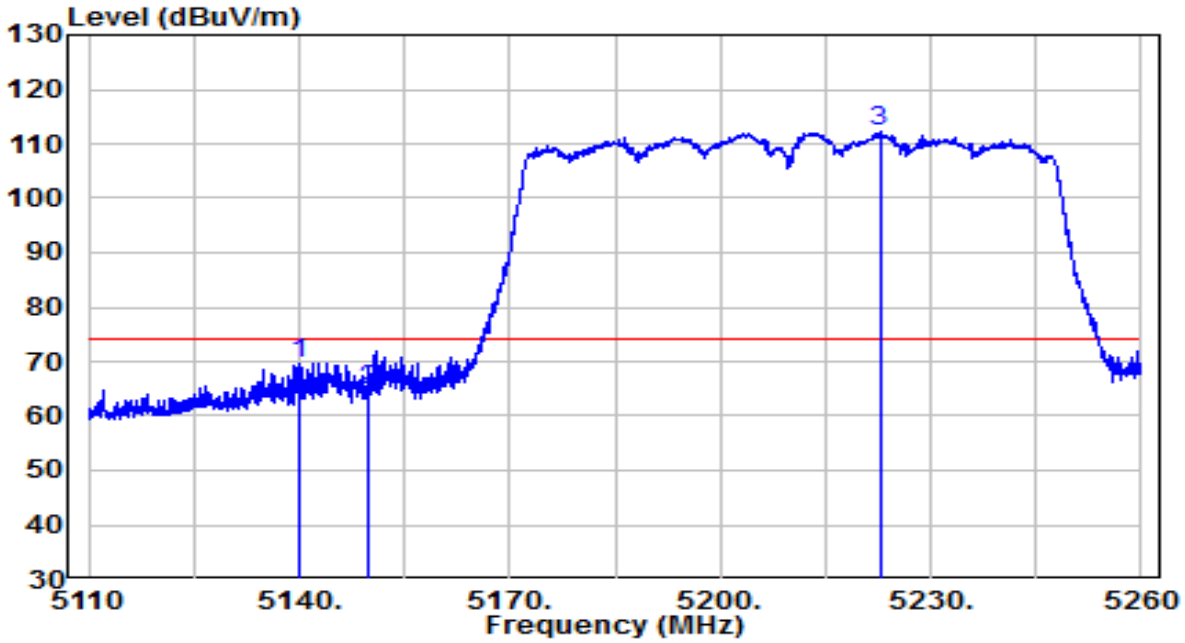


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5140.075	49.81	19.90	69.70	-4.30	74.00	Peak
2		5150.000	44.95	19.91	64.85	-9.15	74.00	Peak
3		5222.725	92.17	19.98	112.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	110V/60Hz

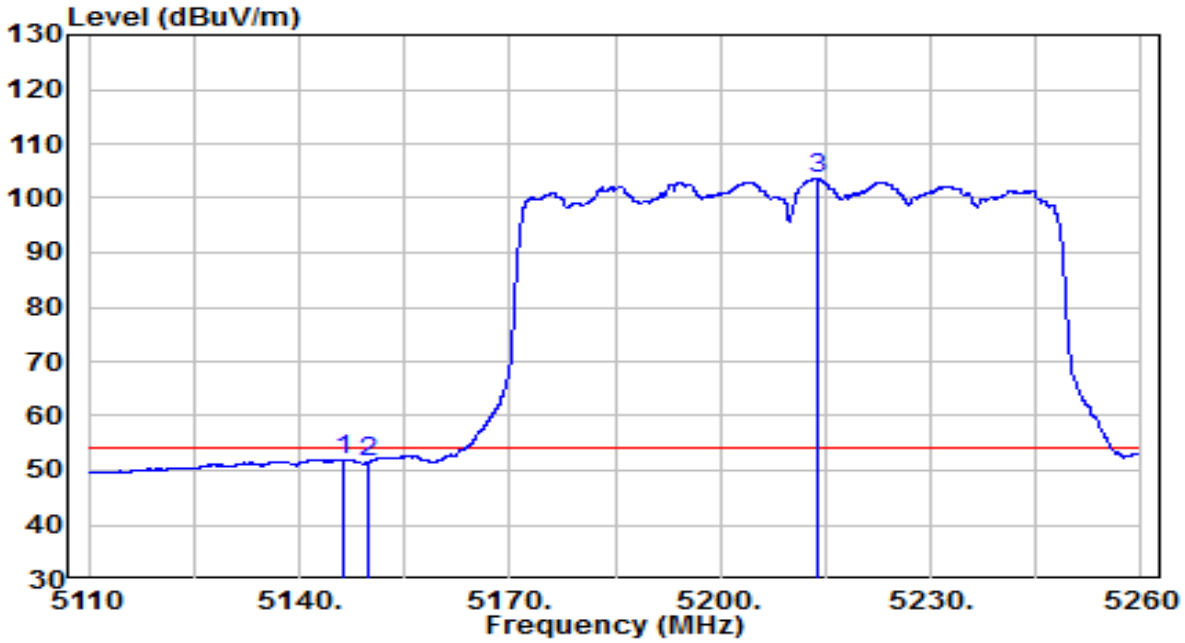


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5146.375	32.16	19.90	52.06	-1.94	54.00	Average
2		5150.000	31.67	19.91	51.58	-2.42	54.00	Average
3		5213.725	83.60	19.97	103.58	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	110V/60Hz

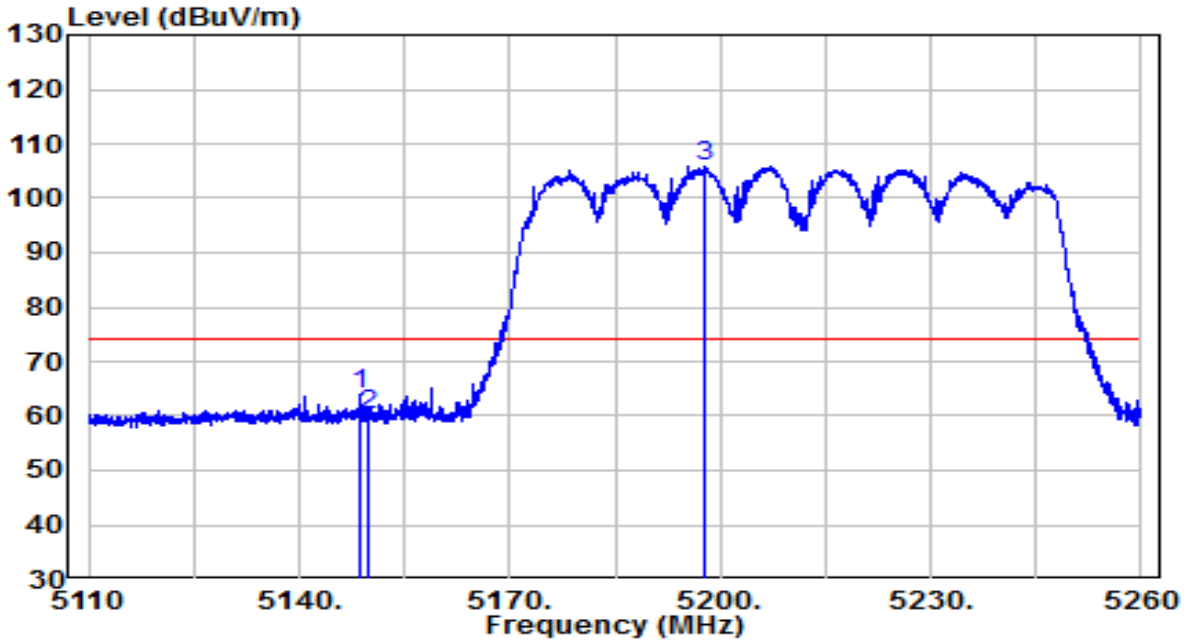


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5148.775	44.04	19.90	63.94	-10.06	74.00	Peak
2		5150.000	40.30	19.91	60.21	-13.79	74.00	Peak
3		5197.825	85.89	19.96	105.84	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	110V/60Hz

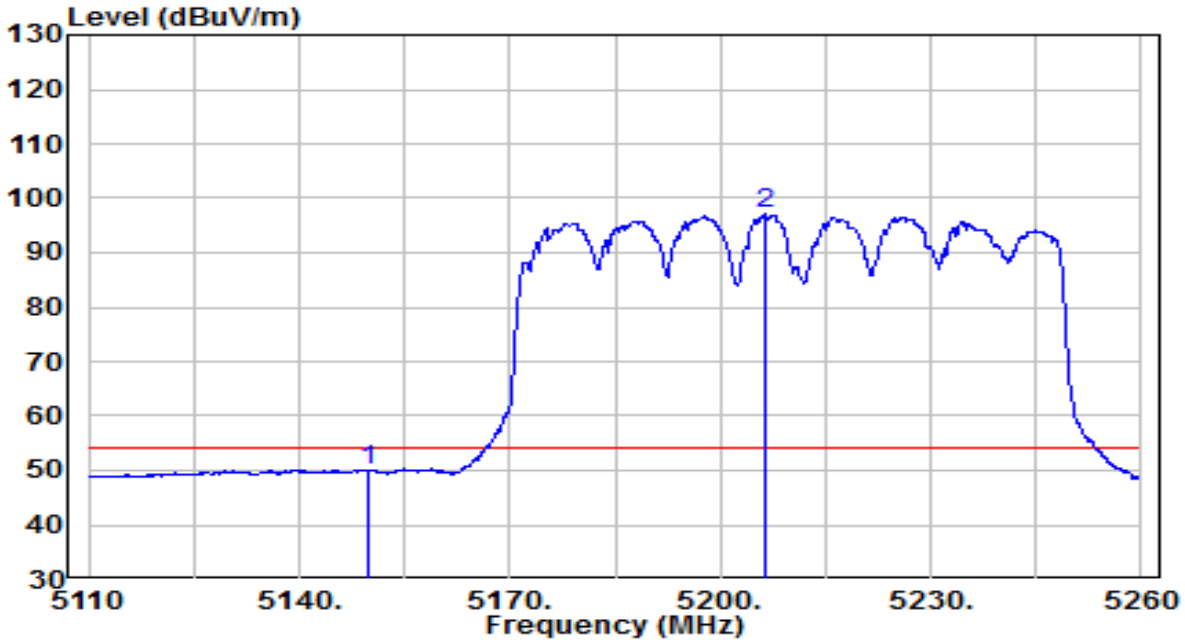


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	29.98	19.91	49.89	-4.11	54.00	Average
2		5206.450	77.19	19.96	97.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	110V/60Hz

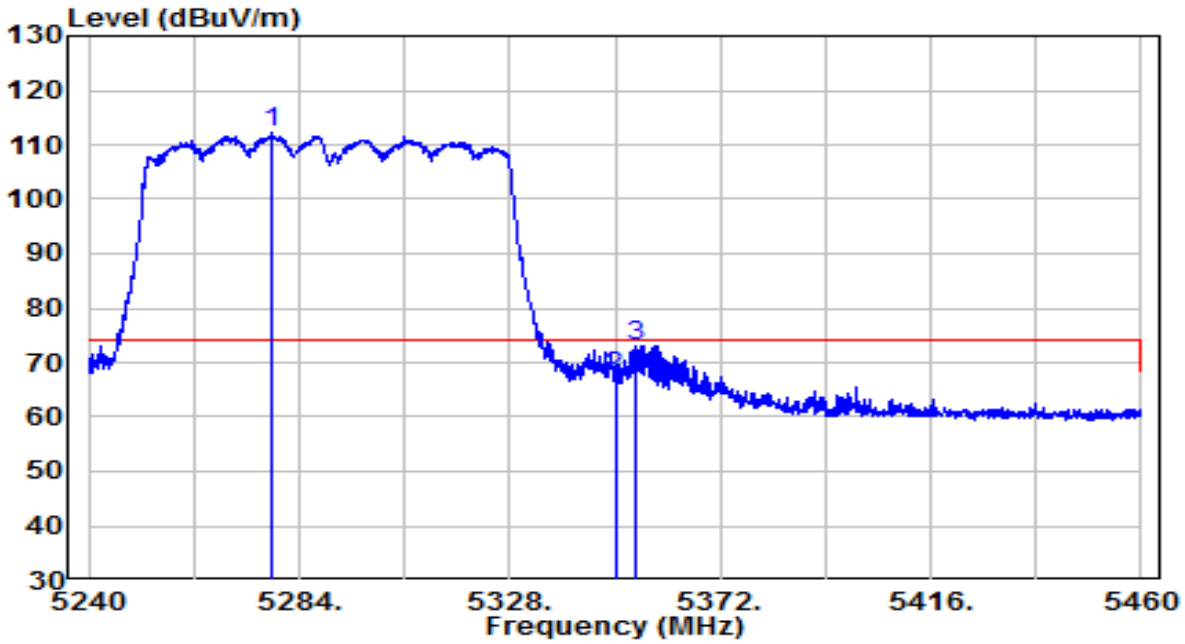


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5278.390	92.13	20.04	112.17	N/A	N/A	Peak
2		5350.000	47.32	20.11	67.43	-6.57	74.00	Peak
3	*	5354.070	53.02	20.12	73.14	-0.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	110V/60Hz

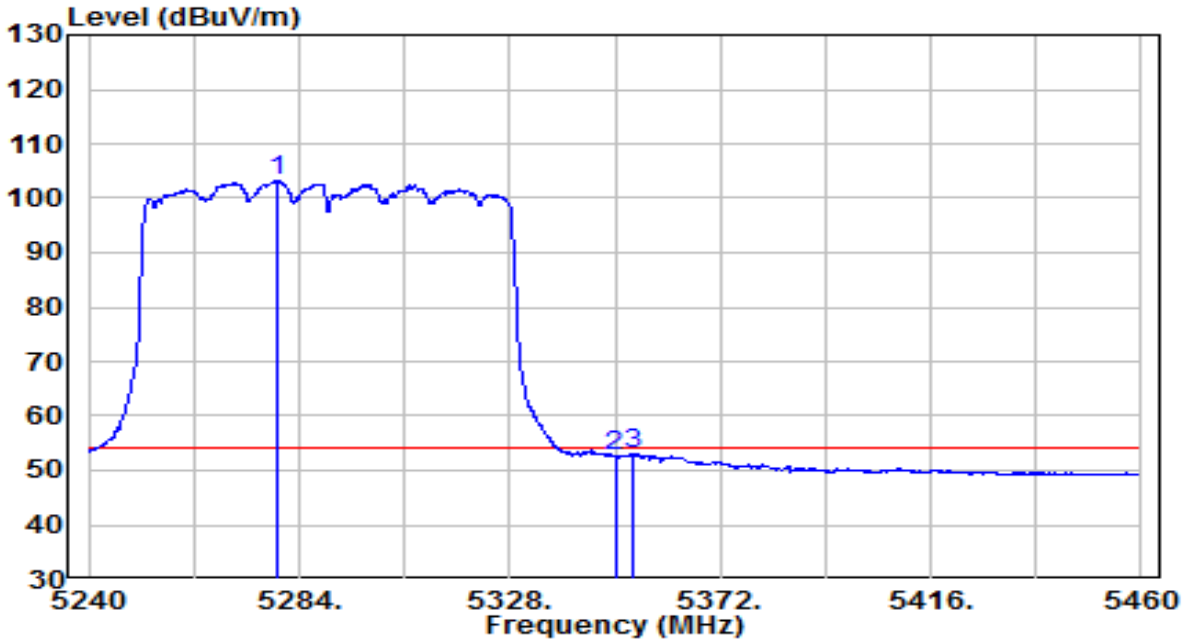


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5279.380	83.19	20.04	103.23	N/A	N/A	Average
2		5350.000	32.53	20.11	52.64	-1.36	54.00	Average
3	*	5353.740	32.97	20.12	53.08	-0.92	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	110V/60Hz

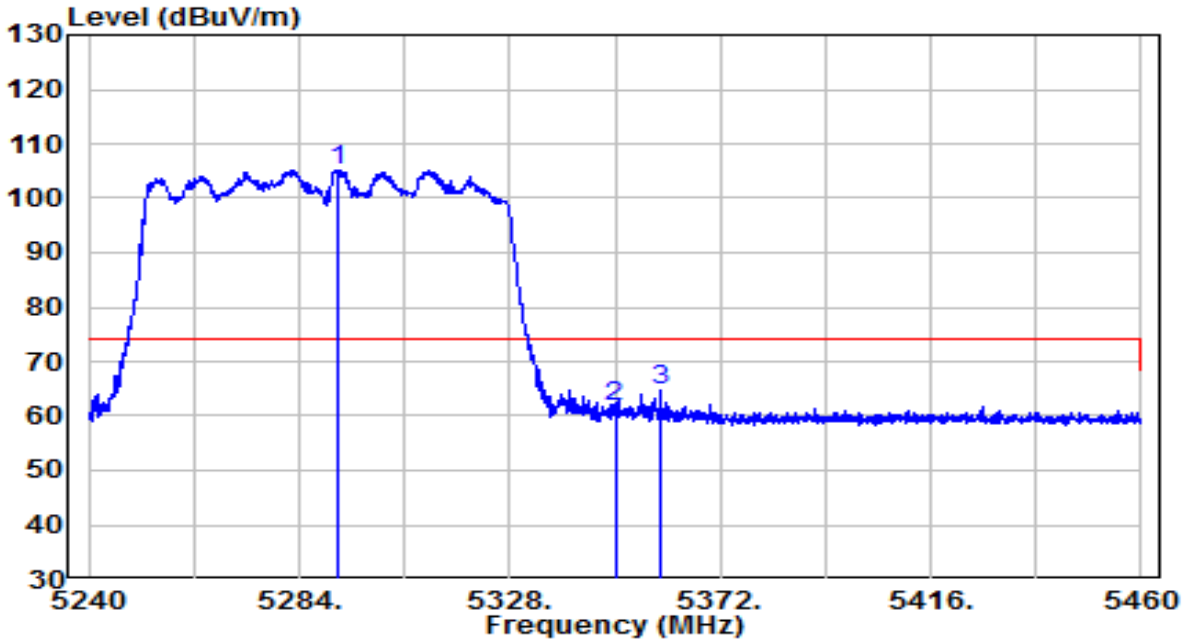


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5292.030	85.16	20.05	105.22	N/A	N/A	Peak
2		5350.000	41.76	20.11	61.88	-12.12	74.00	Peak
3	*	5359.570	44.57	20.12	64.70	-9.30	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	110V/60Hz

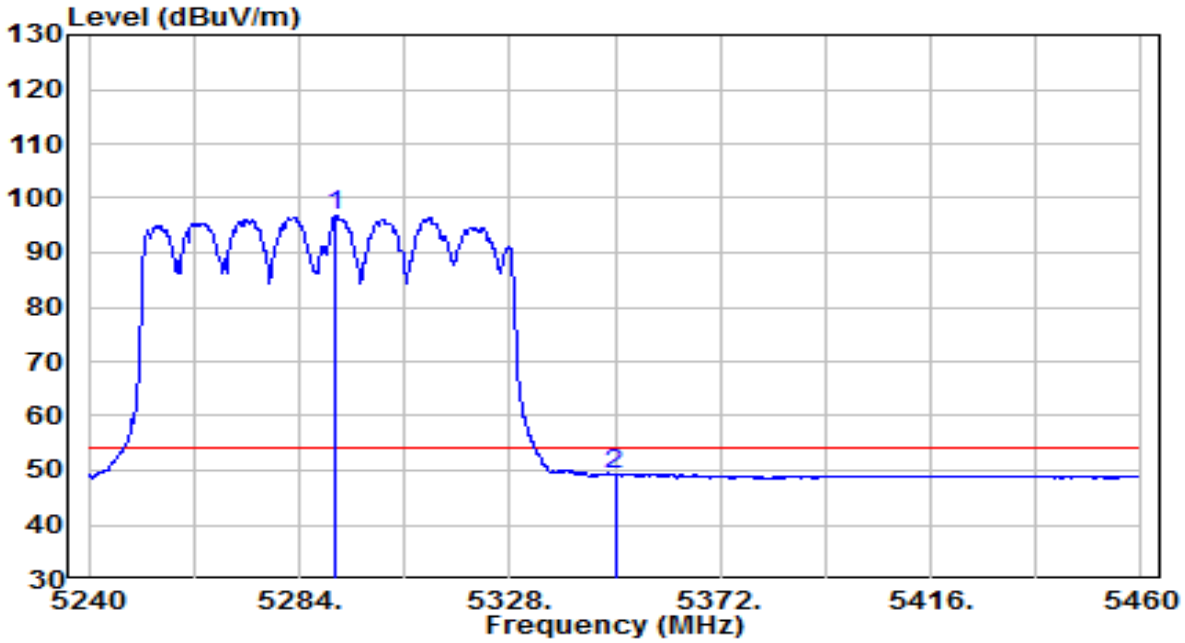


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5291.700	76.68	20.05	96.74	N/A	N/A	Average
2	*	5350.000	29.09	20.11	49.20	-4.80	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	110V/60Hz

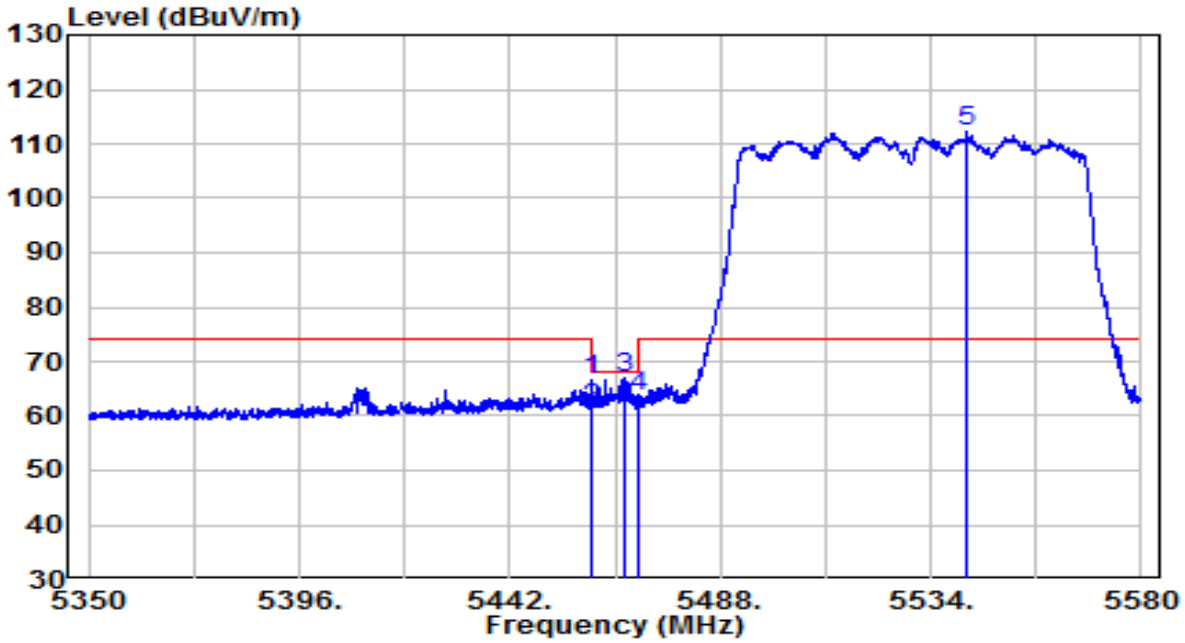

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5459.710	46.41	20.23	66.64	-7.36	74.00	Peak
2		5460.000	41.13	20.23	61.35	-6.85	68.20	Peak
3	*	5467.300	46.69	20.24	66.93	-1.27	68.20	Peak
4		5470.000	43.19	20.24	63.43	-4.77	68.20	Peak
5		5541.820	91.91	20.41	112.31	N/A	N/A	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	110V/60Hz

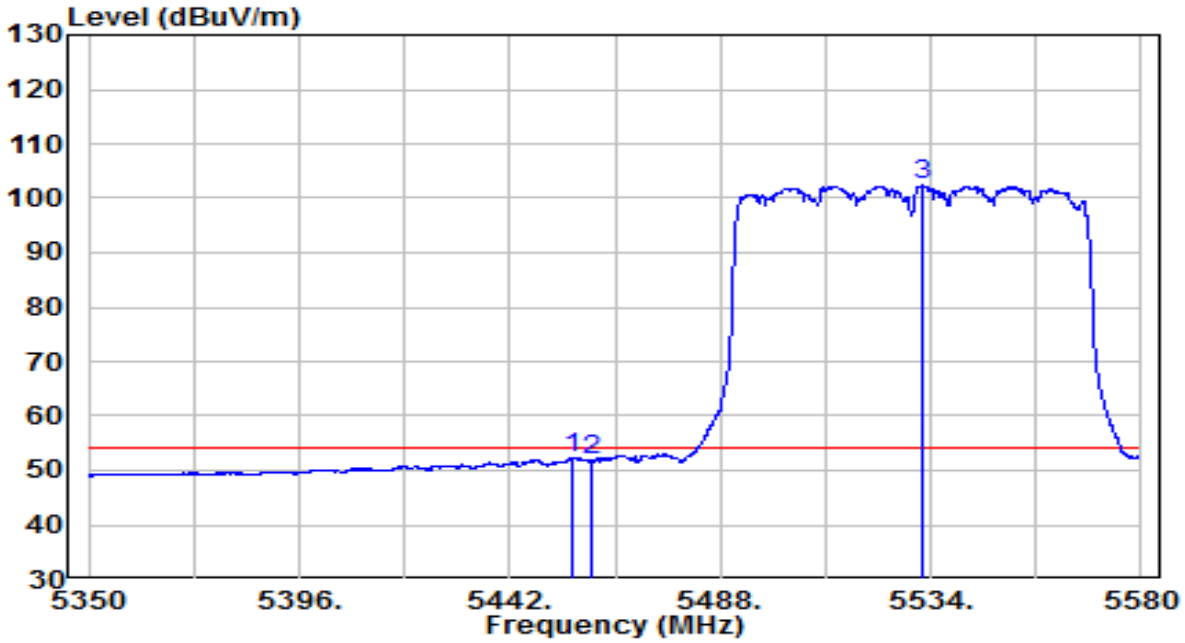


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5455.800	32.11	20.22	52.33	-1.67	54.00	Average
2		5460.000	31.62	20.23	51.85	-2.15	54.00	Average
3		5532.160	81.95	20.37	102.32	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	110V/60Hz

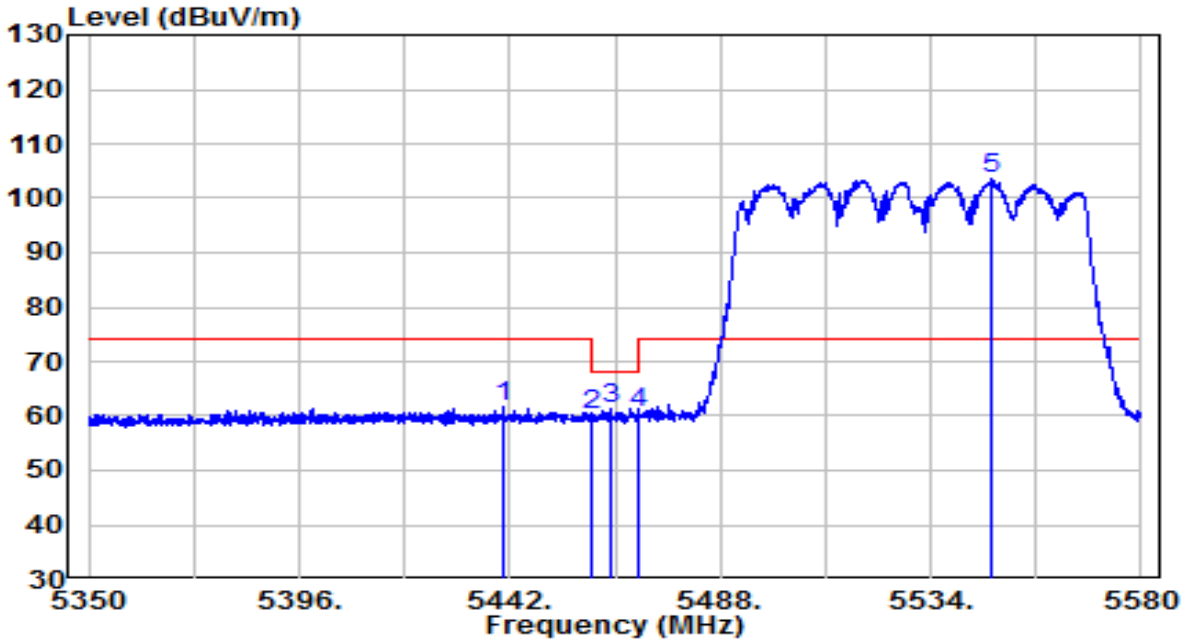


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5440.620	41.45	20.21	61.66	-12.34	74.00	Peak
2		5460.000	39.79	20.23	60.02	-8.18	68.20	Peak
3	*	5464.195	41.14	20.23	61.37	-6.83	68.20	Peak
4		5470.000	40.32	20.24	60.56	-7.64	68.20	Peak
5		5546.995	83.22	20.42	103.65	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	110V/60Hz

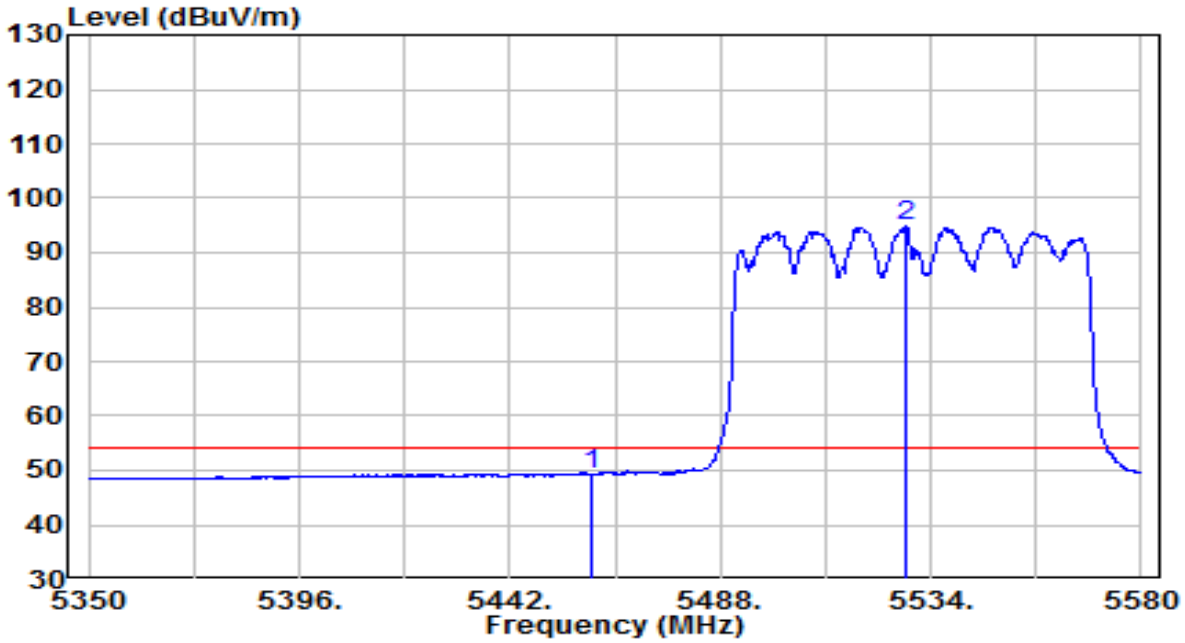


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5460.000	28.99	20.23	49.22	-4.78	54.00	Average
2		5528.710	74.44	20.36	94.80	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	110V/60Hz

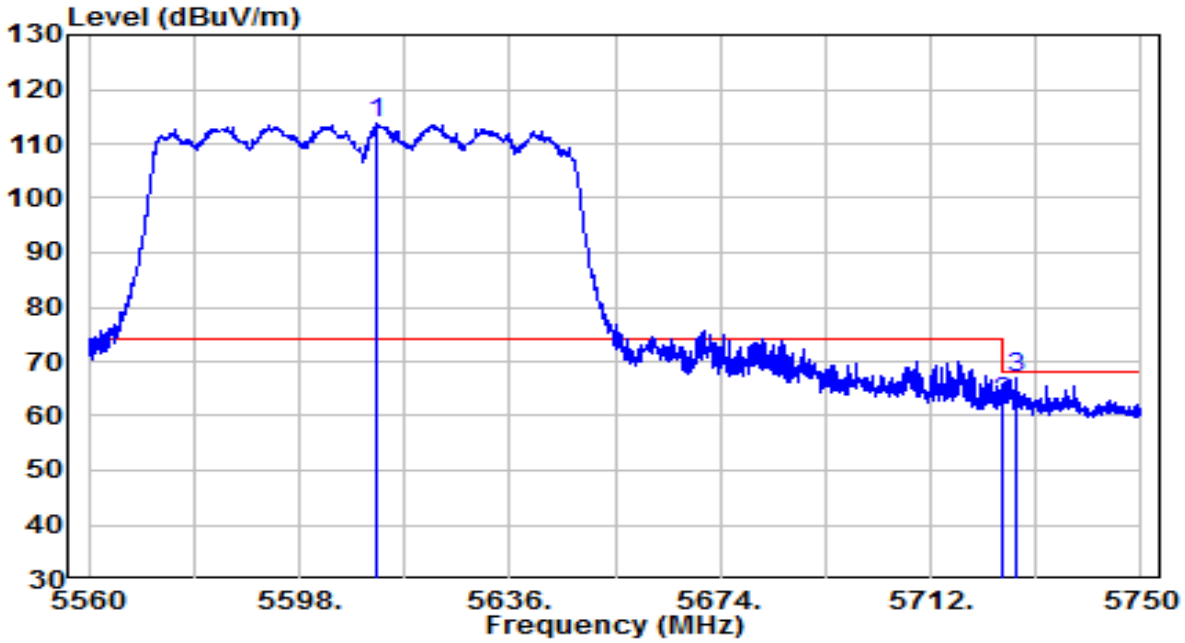


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5611.775	92.97	20.63	113.60	N/A	N/A	Peak
2		5725.000	41.58	21.00	62.58	-5.62	68.20	Peak
3	*	5727.295	46.08	21.01	67.08	-1.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	110V/60Hz

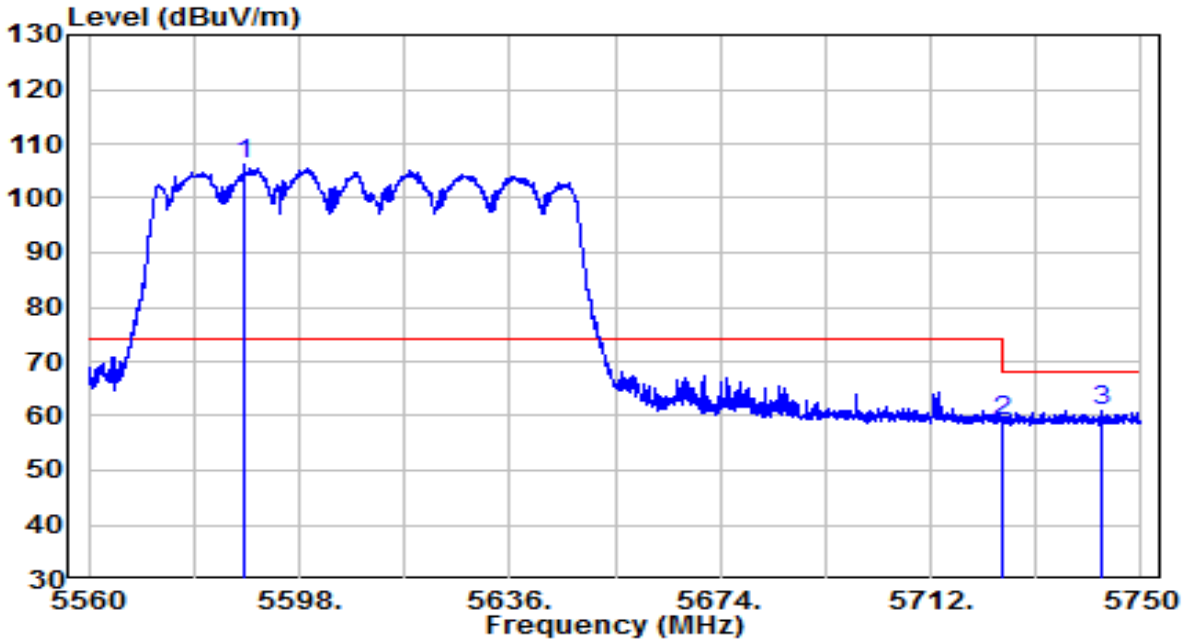


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5587.930	85.56	20.55	106.11	N/A	N/A	Peak
2		5725.000	38.02	21.00	59.02	-9.18	68.20	Peak
3	*	5743.065	40.04	21.06	61.09	-7.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	110V/60Hz

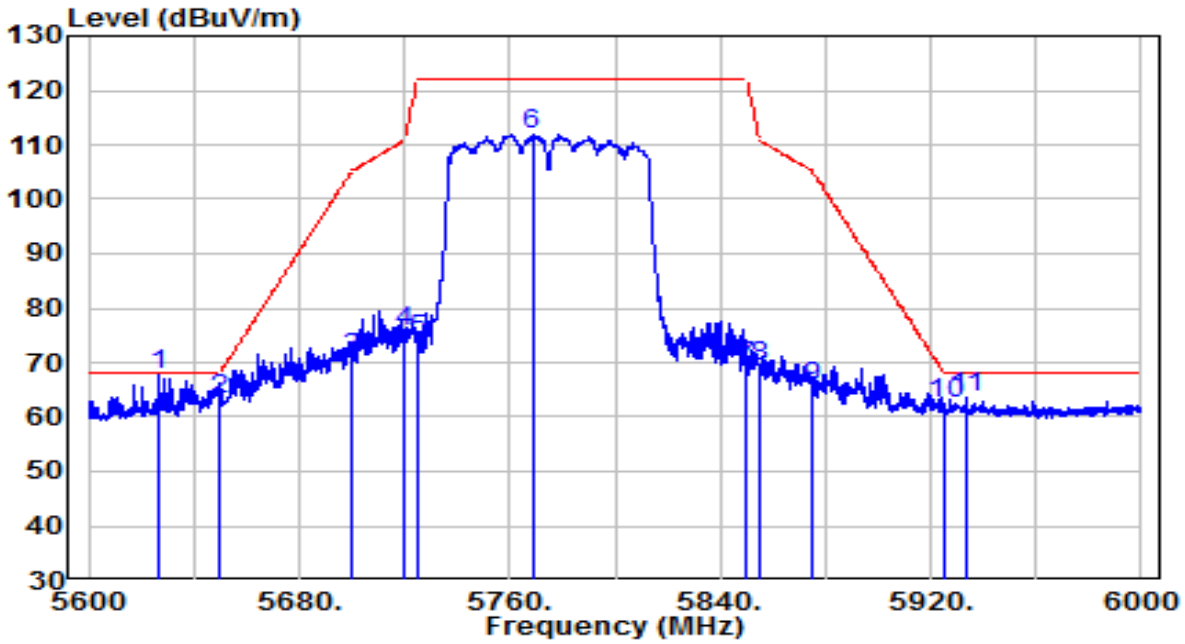

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5626.800	47.01	20.68	67.69	-0.51	68.20	Peak
2		5650.000	42.28	20.76	63.03	-5.17	68.20	Peak
3		5700.000	49.65	20.92	70.57	-34.63	105.20	Peak
4		5720.000	54.68	20.98	75.66	-35.14	110.80	Peak
5		5725.000	53.14	21.00	74.13	-48.07	122.20	Peak
6		5768.600	90.70	21.14	111.85	N/A	N/A	Peak
7		5850.000	47.92	21.40	69.32	-52.88	122.20	Peak
8		5855.000	47.70	21.42	69.12	-41.68	110.80	Peak
9		5875.000	43.92	21.49	65.40	-39.80	105.20	Peak
10		5925.000	40.83	21.65	62.48	-5.72	68.20	Peak
11		5933.200	41.86	21.67	63.53	-4.67	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	110V/60Hz

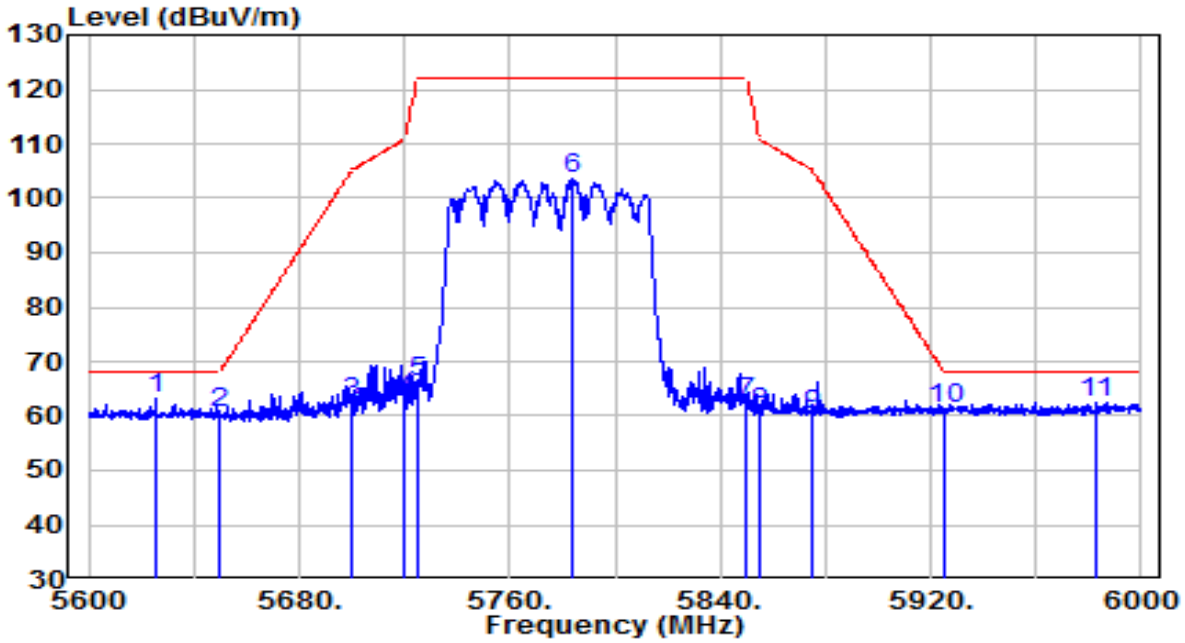

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5625.400	42.56	20.68	63.24	-4.96	68.20	Peak
2		5650.000	39.90	20.76	60.66	-7.54	68.20	Peak
3		5700.000	41.71	20.92	62.63	-42.57	105.20	Peak
4		5720.000	41.84	20.98	62.83	-47.97	110.80	Peak
5		5725.000	45.39	21.00	66.39	-55.81	122.20	Peak
6		5784.200	82.22	21.19	103.41	N/A	N/A	Peak
7		5850.000	41.07	21.40	62.48	-59.72	122.20	Peak
8		5855.000	39.30	21.42	60.72	-50.08	110.80	Peak
9		5875.000	38.79	21.49	60.28	-44.92	105.20	Peak
10		5925.000	39.65	21.65	61.30	-6.90	68.20	Peak
11		5983.000	40.75	21.83	62.59	-5.61	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5180MHz	Test Voltage	110V/60Hz

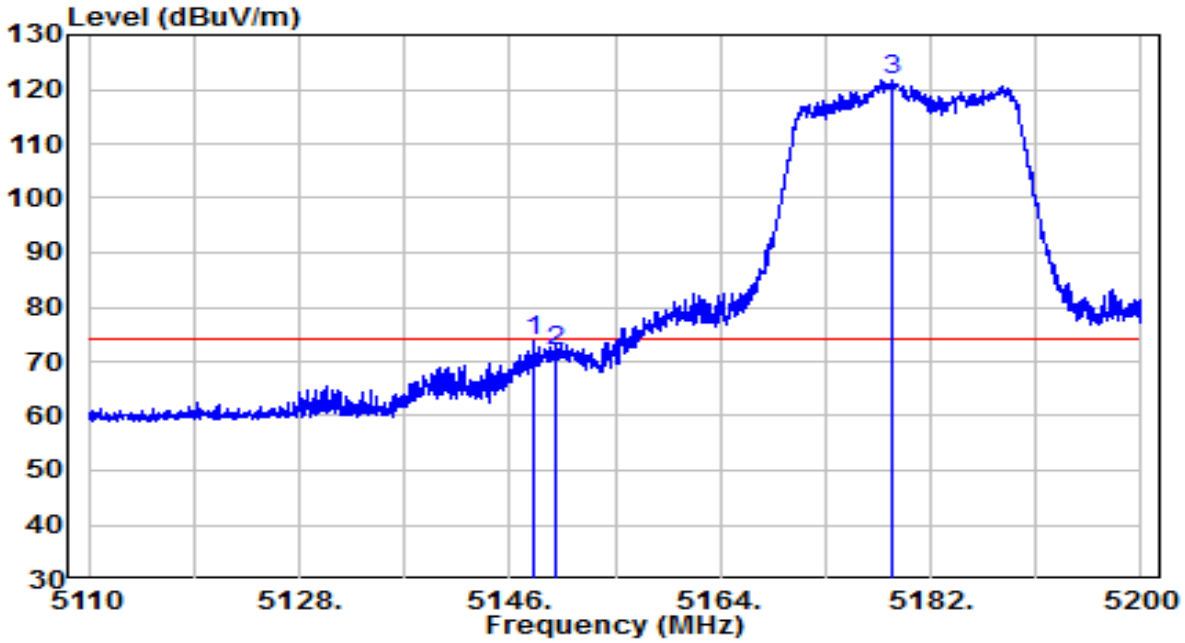


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5148.070	53.80	19.90	73.70	-0.30	74.00	Peak
2		5150.000	51.92	19.91	71.83	-2.17	74.00	Peak
3		5178.715	101.86	19.94	121.79	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5180MHz	Test Voltage	110V/60Hz

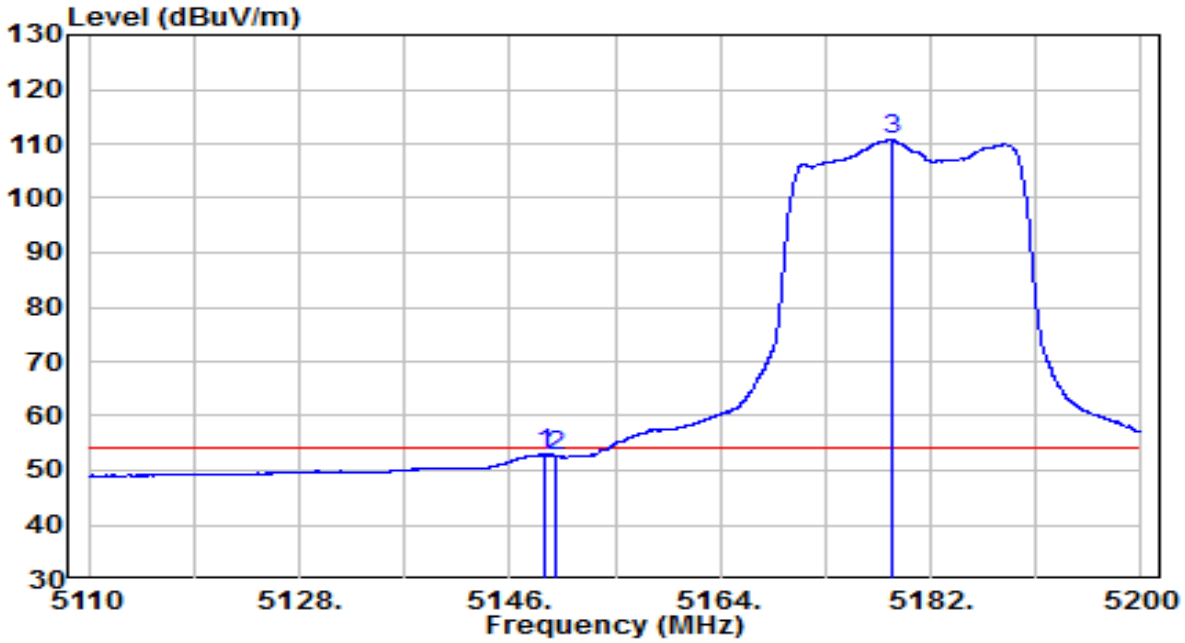


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5148.925	33.27	19.90	53.17	-0.83	54.00	Average
2		5150.000	32.71	19.91	52.62	-1.38	54.00	Average
3		5178.715	90.91	19.94	110.85	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5180MHz	Test Voltage	110V/60Hz

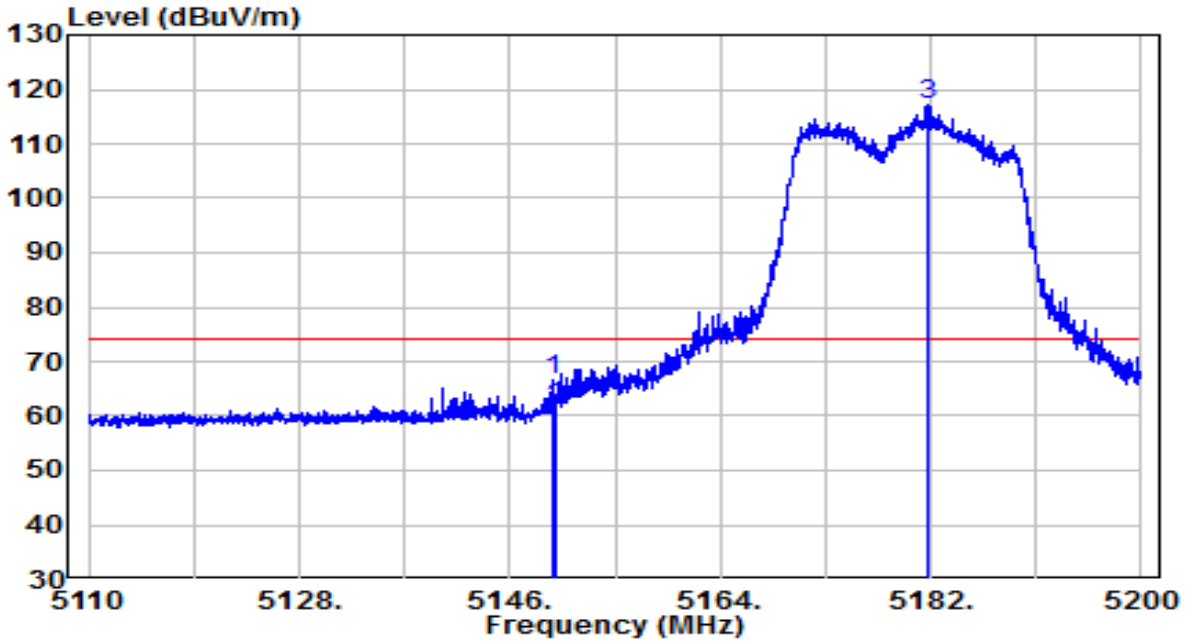


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5149.600	46.57	19.91	66.48	-7.52	74.00	Peak
2		5150.000	41.57	19.91	61.48	-12.52	74.00	Peak
3		5181.820	97.11	19.94	117.05	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5180MHz	Test Voltage	110V/60Hz

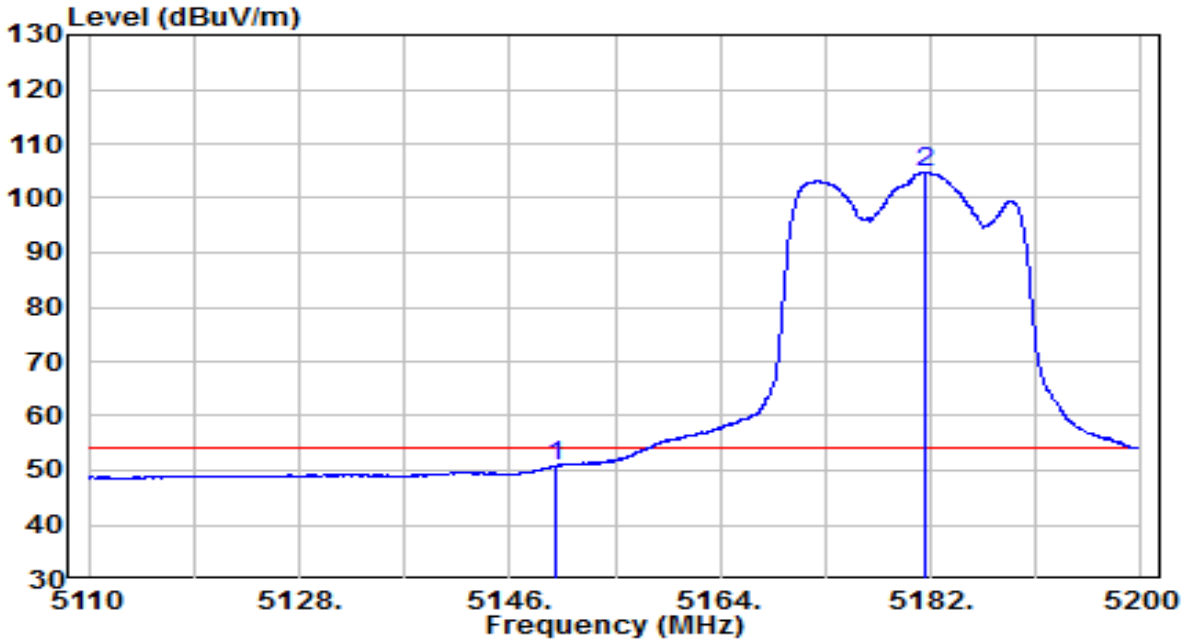


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	30.89	19.91	50.79	-3.21	54.00	Average
2		5181.505	84.71	19.94	104.64	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5240MHz	Test Voltage	110V/60Hz

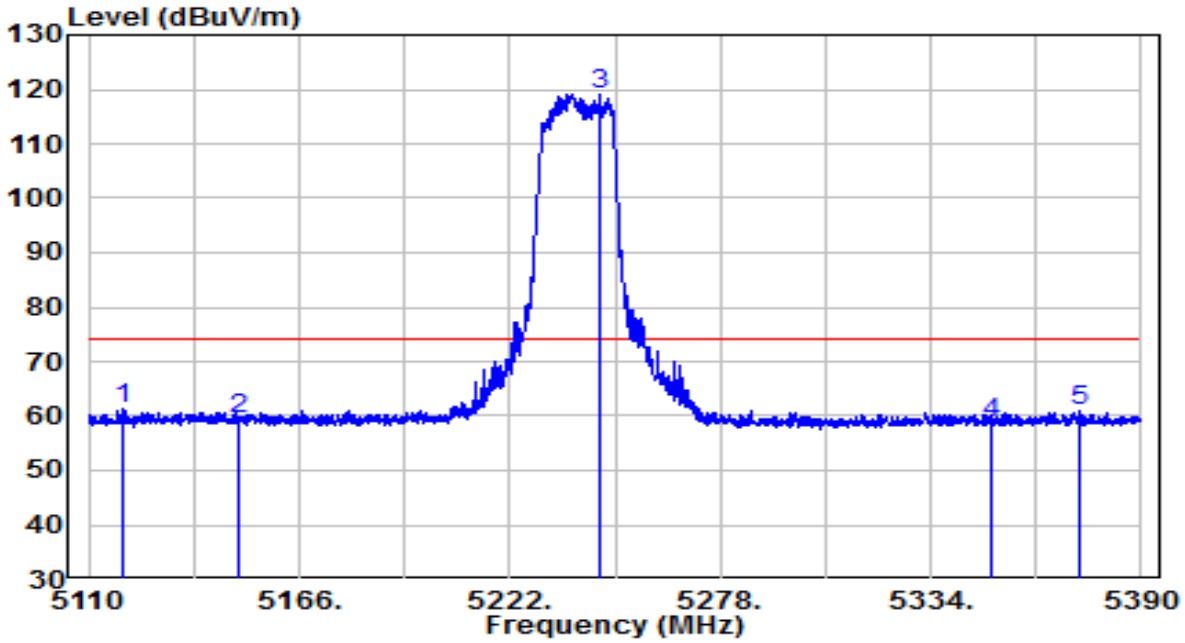


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5118.820	41.52	19.87	61.39	-12.61	74.00	Peak
2		5150.000	39.54	19.91	59.45	-14.55	74.00	Peak
3		5246.080	99.21	20.01	119.22	N/A	N/A	Peak
4		5350.000	38.73	20.11	58.85	-15.15	74.00	Peak
5		5373.900	40.62	20.14	60.76	-13.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5240MHz	Test Voltage	110V/60Hz

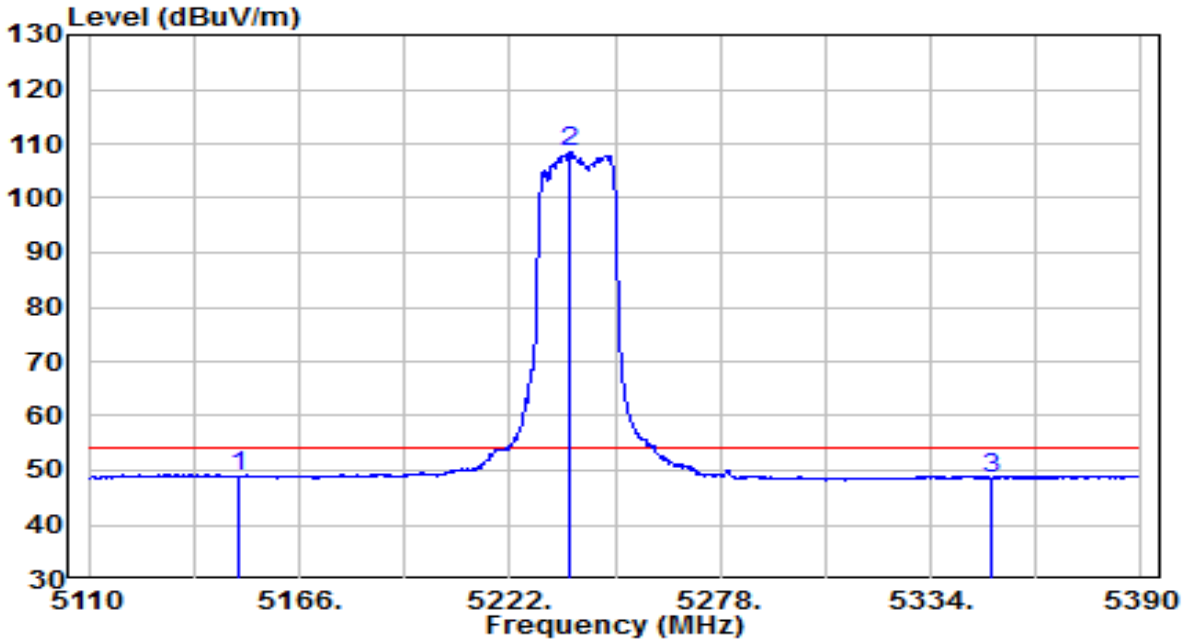


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	29.08	19.91	48.99	-5.01	54.00	Average
2		5238.240	88.50	20.00	108.50	N/A	N/A	Average
3		5350.000	28.53	20.11	48.64	-5.36	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5240MHz	Test Voltage	110V/60Hz

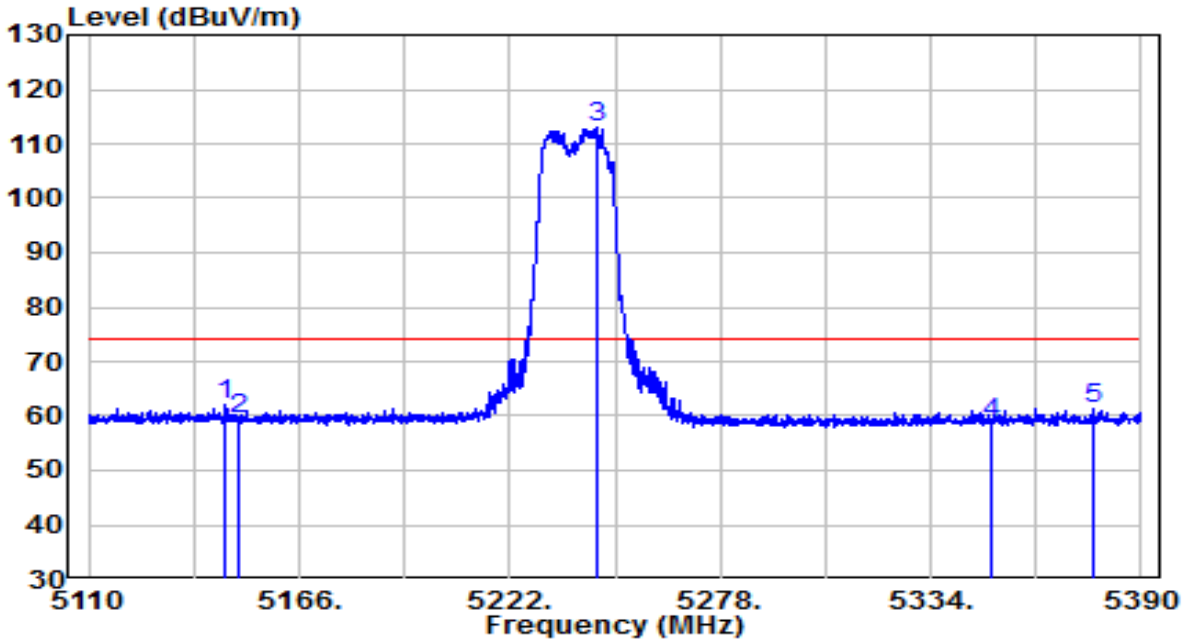


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5146.120	42.22	19.90	62.12	-11.88	74.00	Peak
2		5150.000	39.46	19.91	59.37	-14.63	74.00	Peak
3		5244.960	93.05	20.00	113.05	N/A	N/A	Peak
4		5350.000	38.40	20.11	58.51	-15.49	74.00	Peak
5		5376.980	41.35	20.14	61.49	-12.51	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5240MHz	Test Voltage	110V/60Hz

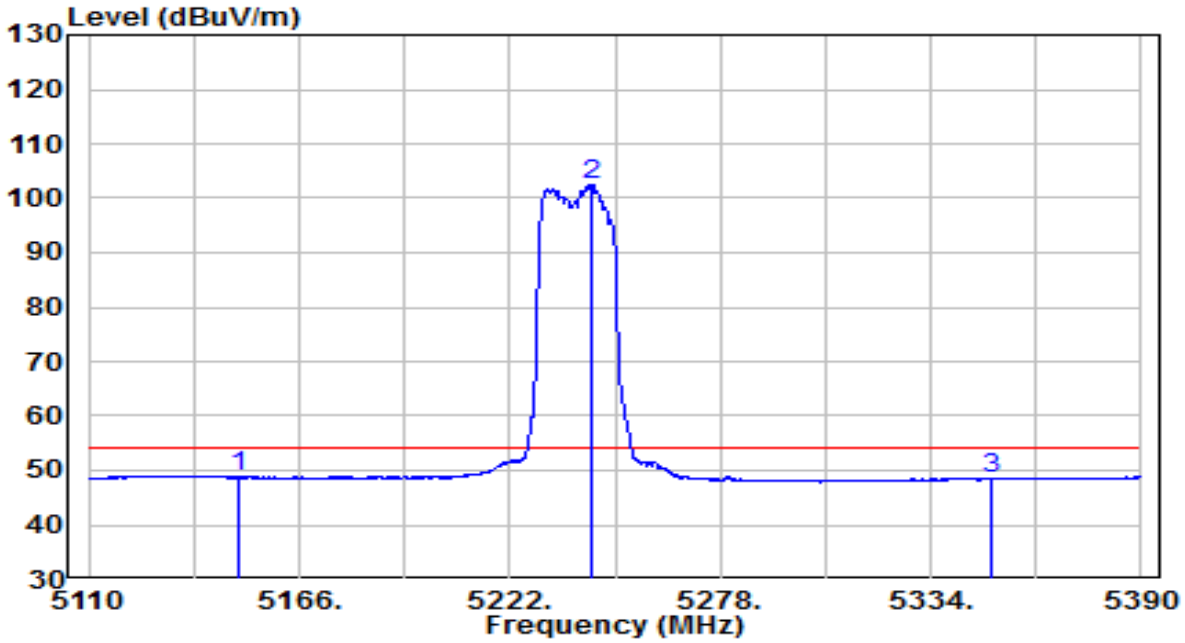


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	28.84	19.91	48.74	-5.26	54.00	Average
2		5243.980	82.43	20.00	102.43	N/A	N/A	Average
3		5350.000	28.21	20.11	48.33	-5.67	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5320MHz	Test Voltage	110V/60Hz

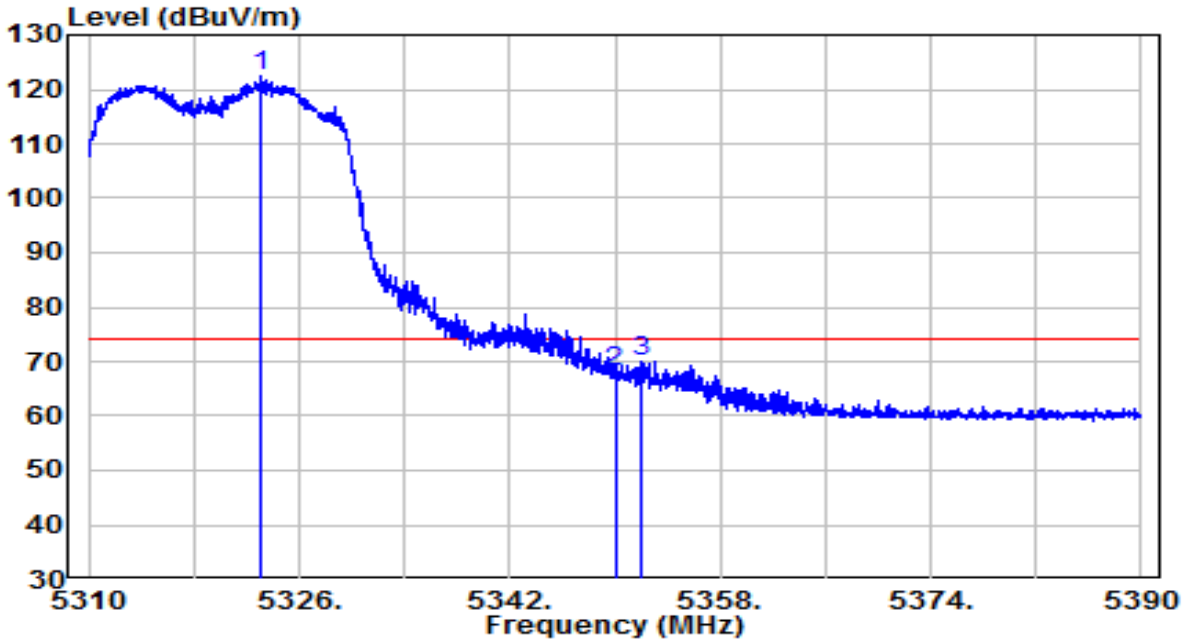


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5323.160	102.39	20.09	122.47	N/A	N/A	Peak
2		5350.000	48.18	20.11	68.29	-5.71	74.00	Peak
3	*	5351.960	49.83	20.12	69.94	-4.06	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5320MHz	Test Voltage	110V/60Hz

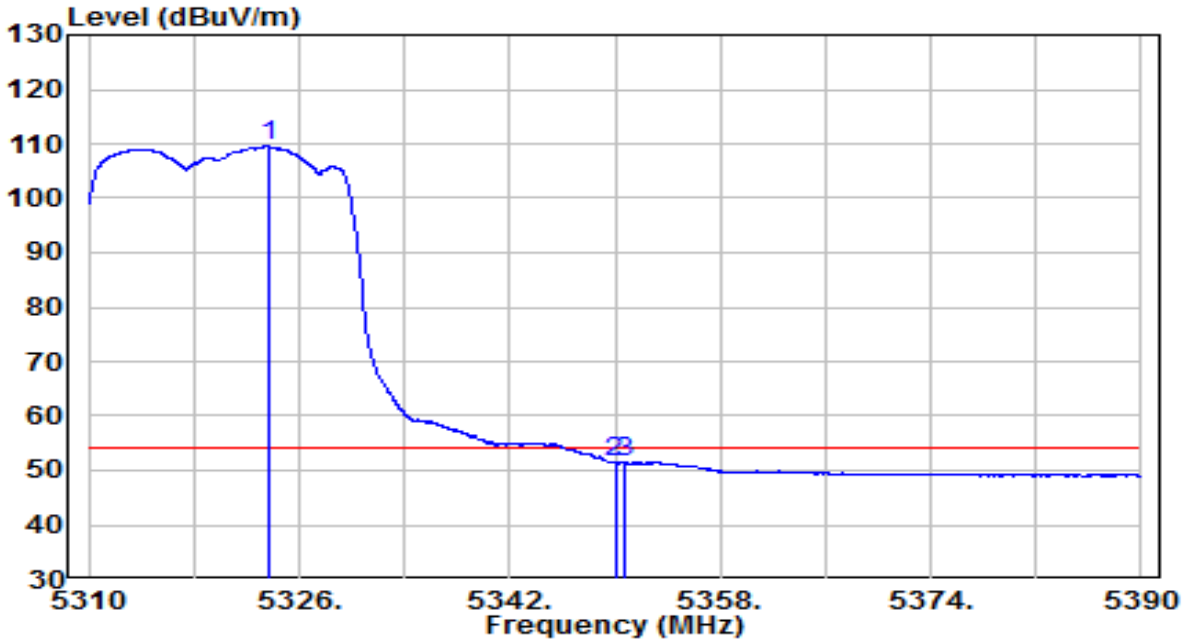


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5323.680	89.47	20.09	109.55	N/A	N/A	Average
2		5350.000	31.24	20.11	51.35	-2.65	54.00	Average
3	*	5350.680	31.51	20.11	51.62	-2.38	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5320MHz	Test Voltage	110V/60Hz

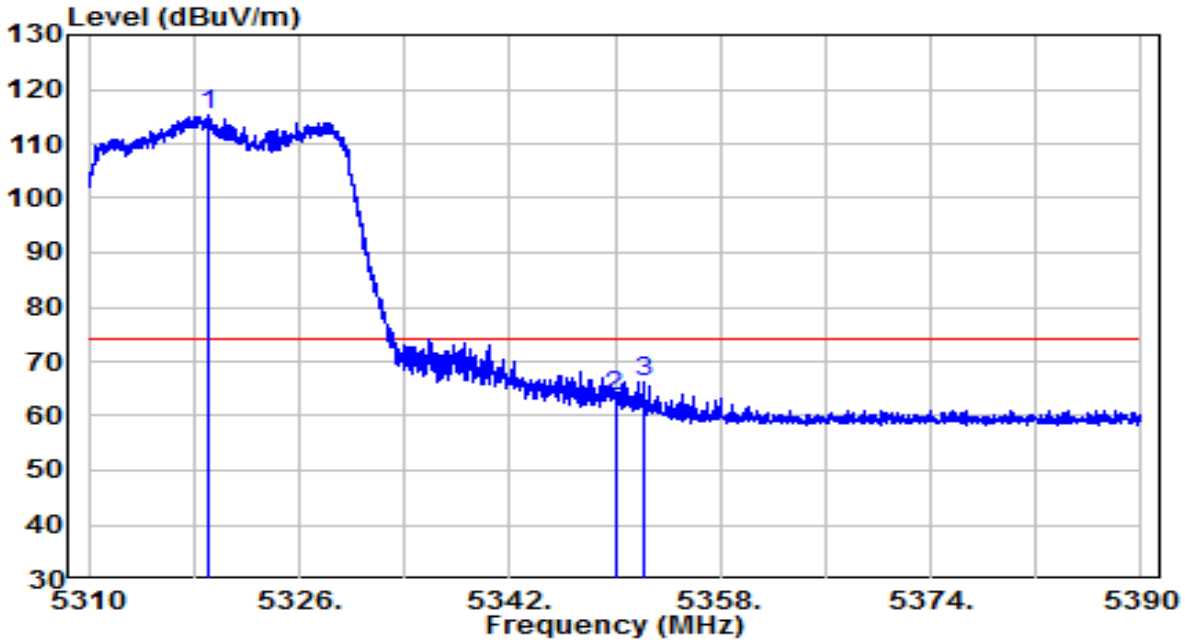


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5319.000	95.07	20.08	115.15	N/A	N/A	Peak
2		5350.000	43.46	20.11	63.57	-10.43	74.00	Peak
3	*	5352.120	46.30	20.12	66.41	-7.59	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5320MHz	Test Voltage	110V/60Hz

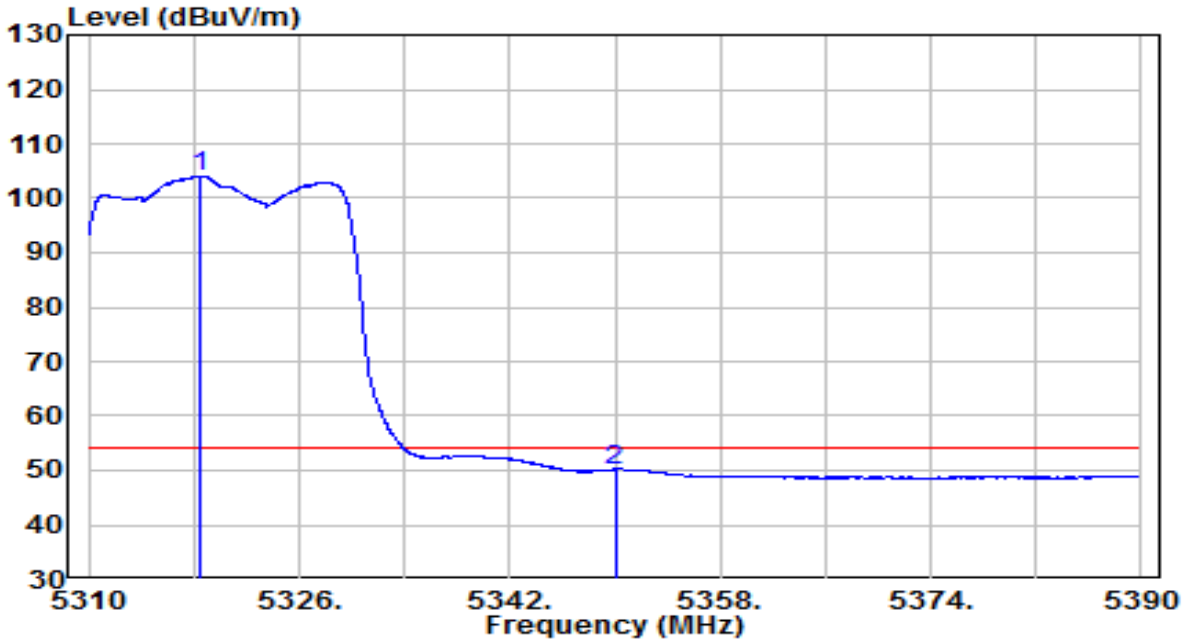


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5318.560	83.99	20.08	104.07	N/A	N/A	Average
2	*	5350.000	29.95	20.11	50.07	-3.93	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5500MHz	Test Voltage	110V/60Hz

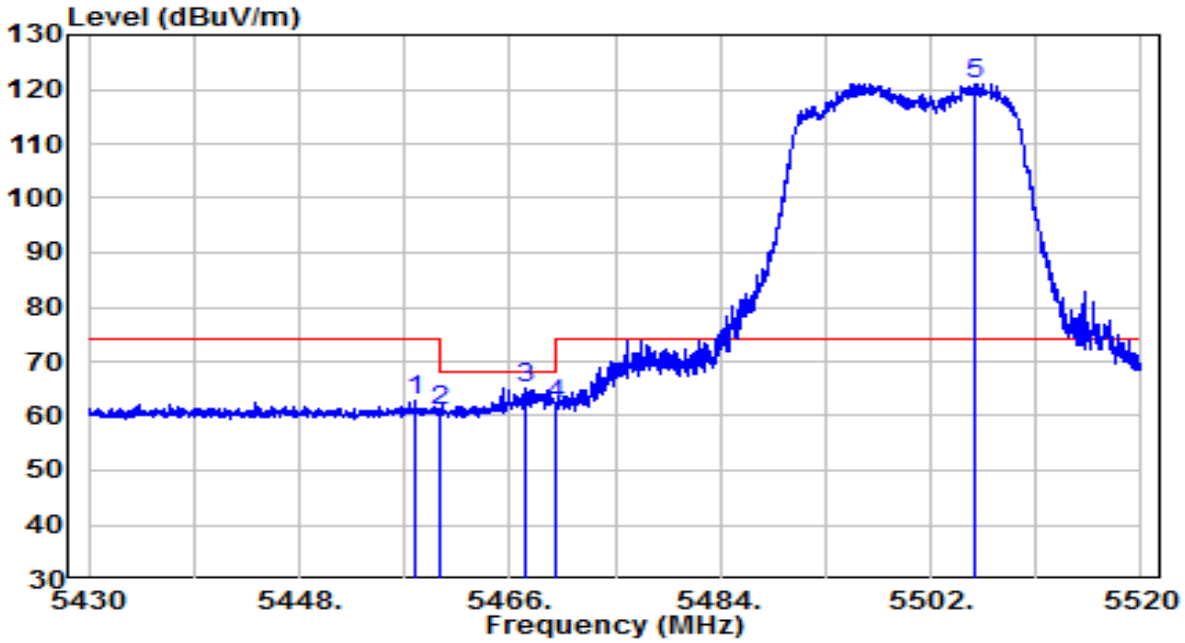


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5457.900	42.59	20.23	62.81	-11.19	74.00	Peak
2		5460.000	40.57	20.23	60.80	-7.40	68.20	Peak
3	*	5467.395	44.96	20.24	65.20	-3.00	68.20	Peak
4		5470.000	41.76	20.24	62.00	-6.20	68.20	Peak
5		5505.825	100.75	20.29	121.04	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5500MHz	Test Voltage	110V/60Hz

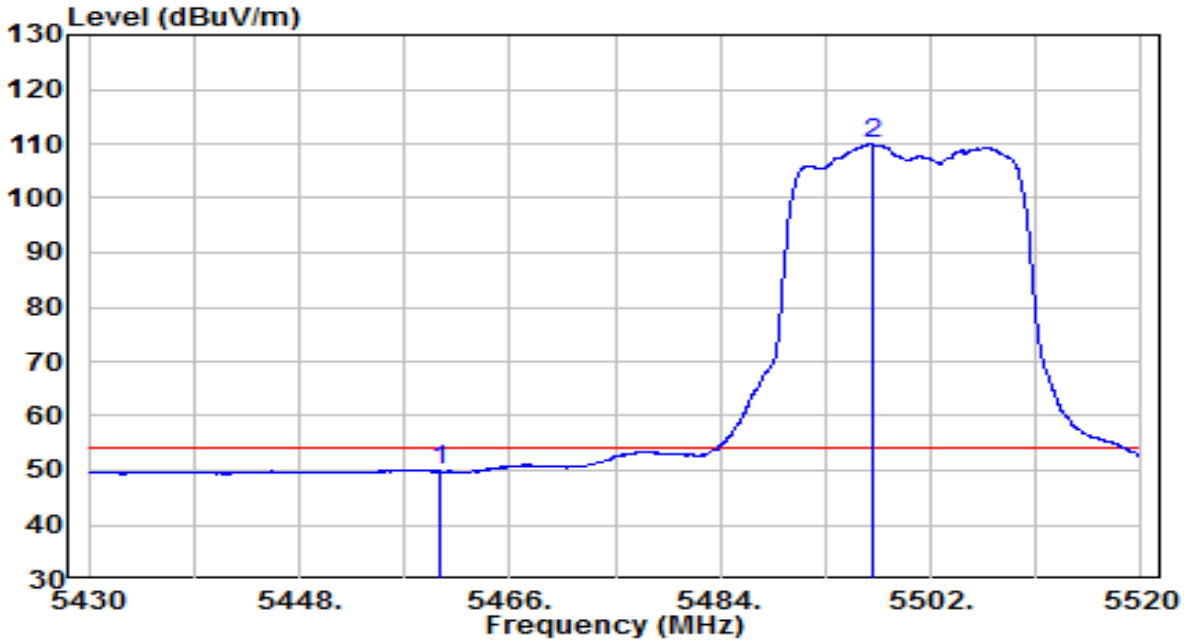


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5460.000	29.64	20.23	49.87	-4.13	54.00	Average
2		5497.050	89.66	20.27	109.93	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5500MHz	Test Voltage	110V/60Hz

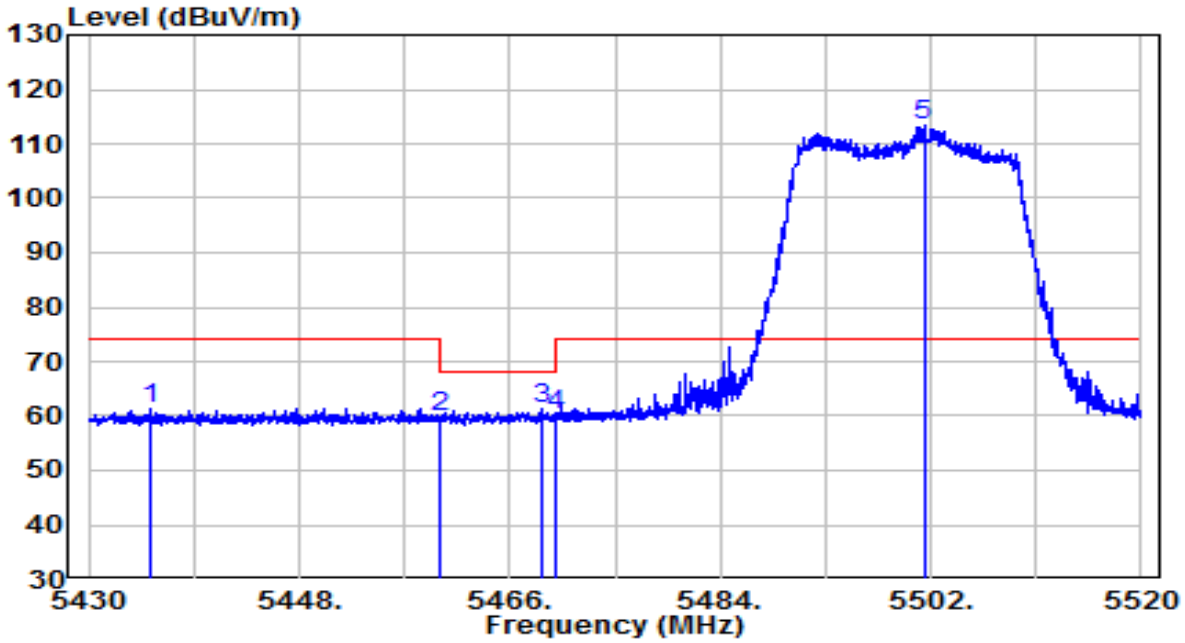

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5435.220	41.17	20.20	61.37	-12.63	74.00	Peak
2		5460.000	39.66	20.23	59.88	-8.32	68.20	Peak
3	*	5468.745	40.96	20.24	61.20	-7.00	68.20	Peak
4		5470.000	40.13	20.24	60.36	-7.84	68.20	Peak
5		5501.415	93.01	20.27	113.28	N/A	N/A	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5500MHz	Test Voltage	110V/60Hz

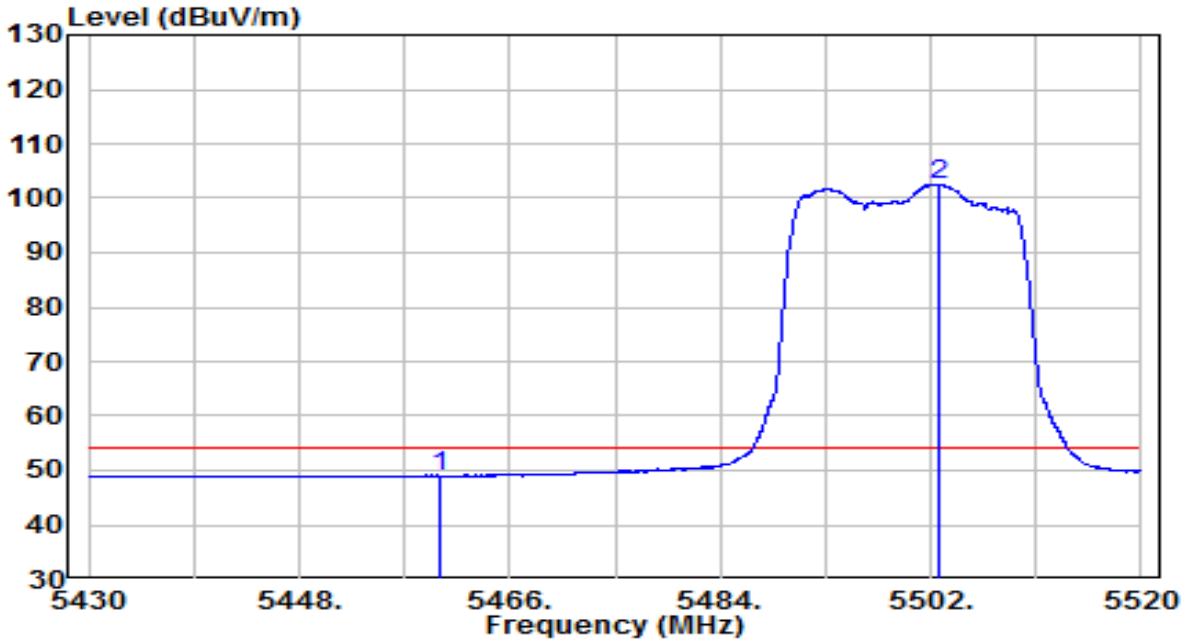


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5460.000	28.75	20.23	48.97	-5.03	54.00	Average
2		5502.630	82.34	20.28	102.62	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5700MHz	Test Voltage	110V/60Hz

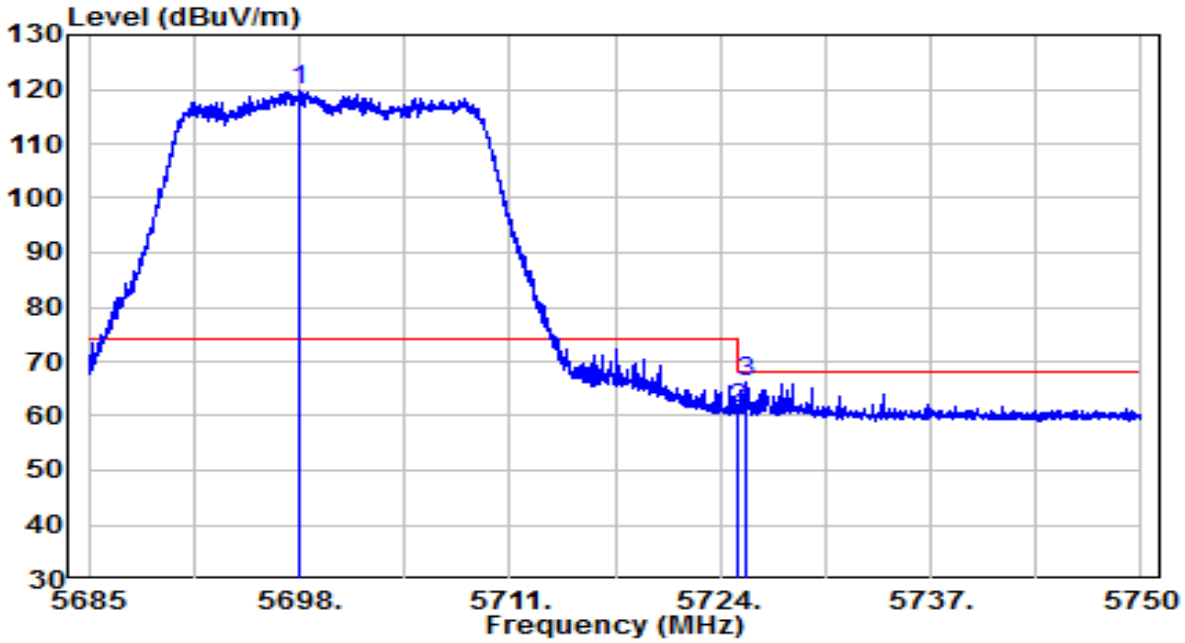


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5697.967	98.79	20.91	119.70	N/A	N/A	Peak
2		5725.000	40.35	21.00	61.35	-6.85	68.20	Peak
3	*	5725.658	45.12	21.00	66.12	-2.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5700MHz	Test Voltage	110V/60Hz

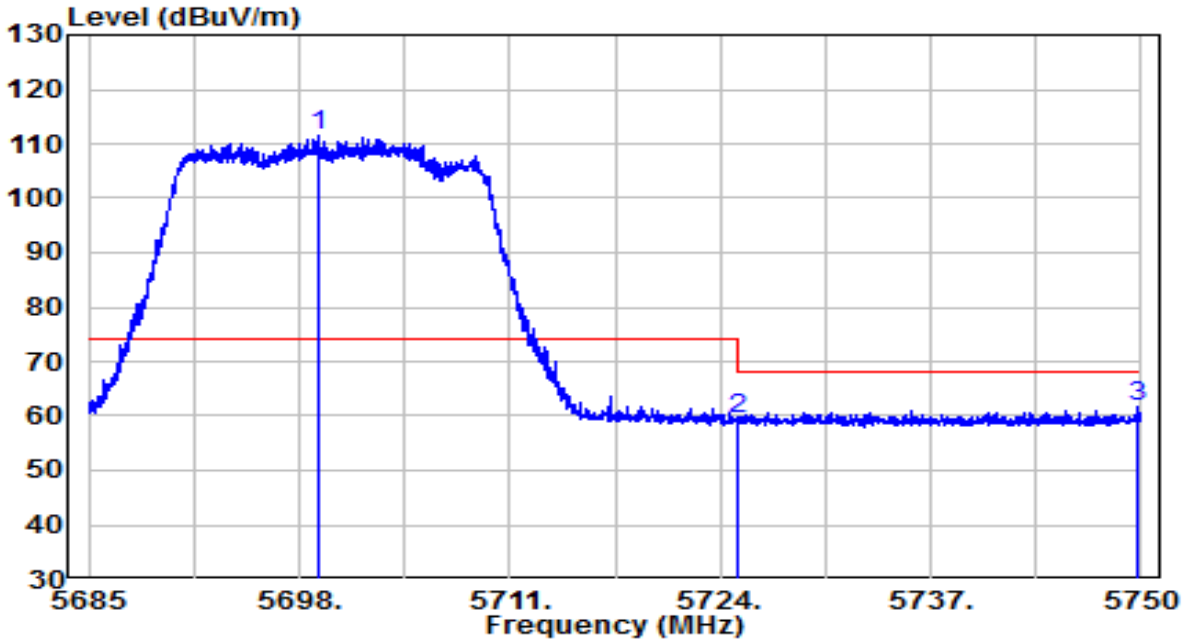


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5699.235	90.56	20.92	111.48	N/A	N/A	Peak
2		5725.000	38.51	21.00	59.51	-8.69	68.20	Peak
3	*	5749.740	40.69	21.08	61.77	-6.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5745MHz	Test Voltage	110V/60Hz

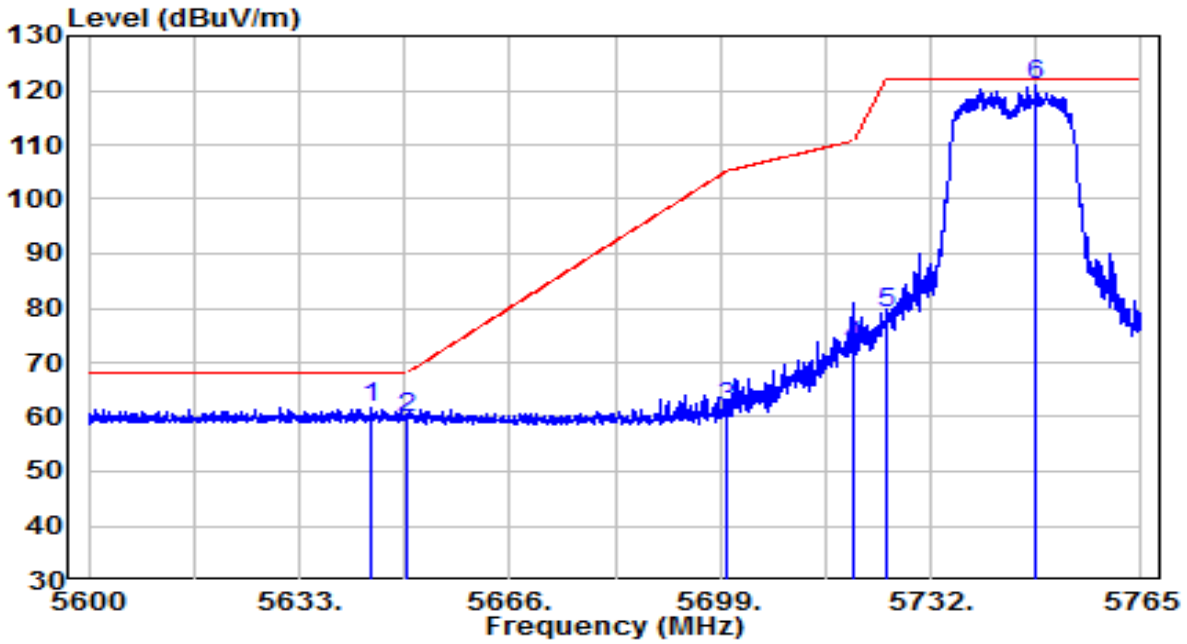


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5644.385	40.86	20.74	61.60	-6.60	68.20	Peak
2		5650.000	39.19	20.76	59.94	-8.26	68.20	Peak
3		5700.000	40.74	20.92	61.66	-43.54	105.20	Peak
4		5720.000	51.98	20.98	72.97	-37.83	110.80	Peak
5		5725.000	57.99	21.00	78.99	-43.21	122.20	Peak
6		5748.335	99.86	21.07	120.93	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5745MHz	Test Voltage	110V/60Hz

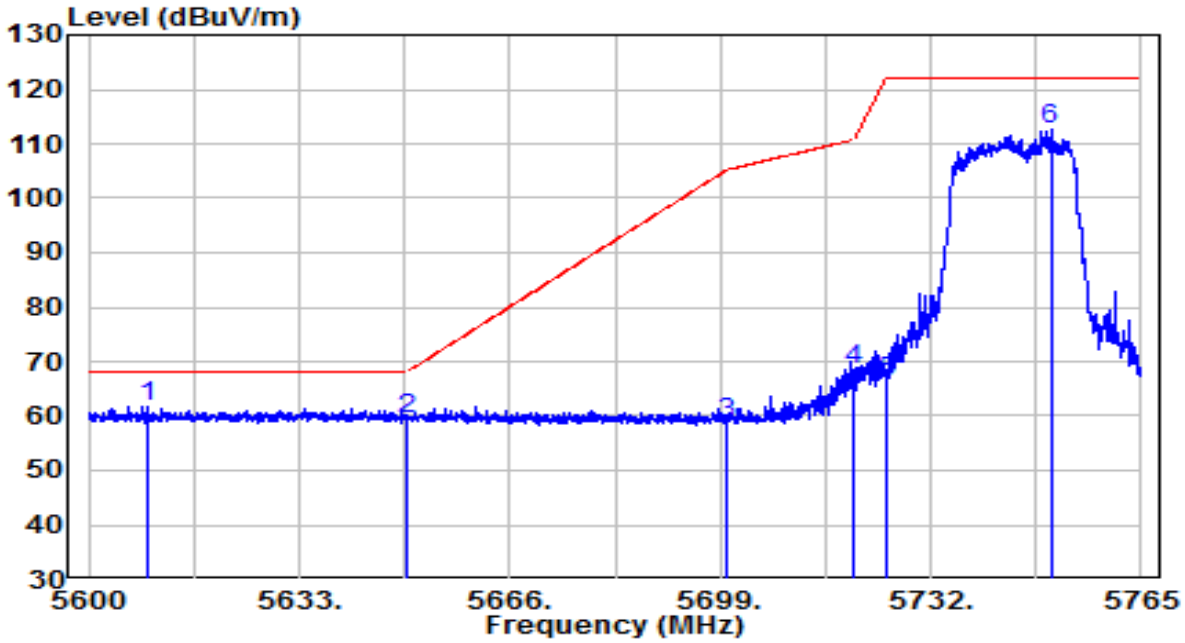


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5609.322	41.18	20.62	61.80	-6.40	68.20	Peak
2		5650.000	38.61	20.76	59.37	-8.83	68.20	Peak
3		5700.000	37.83	20.92	58.75	-46.45	105.20	Peak
4		5720.000	47.38	20.98	68.37	-42.43	110.80	Peak
5		5725.000	45.36	21.00	66.36	-55.84	122.20	Peak
6		5750.810	91.67	21.08	112.75	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5825MHz	Test Voltage	110V/60Hz

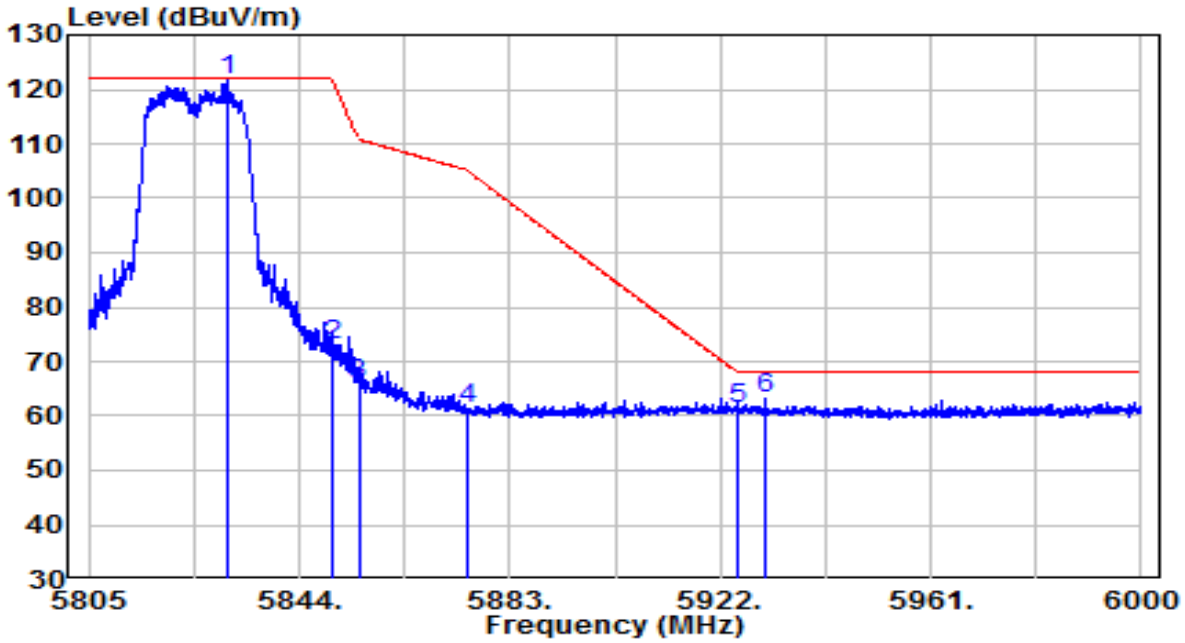


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5830.545	100.41	21.34	121.75	N/A	N/A	Peak
2		5850.000	51.73	21.40	73.13	-49.07	122.20	Peak
3		5855.000	44.36	21.42	65.78	-45.02	110.80	Peak
4		5875.000	40.02	21.49	61.50	-43.70	105.20	Peak
5		5925.000	39.77	21.65	61.42	-6.78	68.20	Peak
6	*	5930.190	41.71	21.66	63.37	-4.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5825MHz	Test Voltage	110V/60Hz

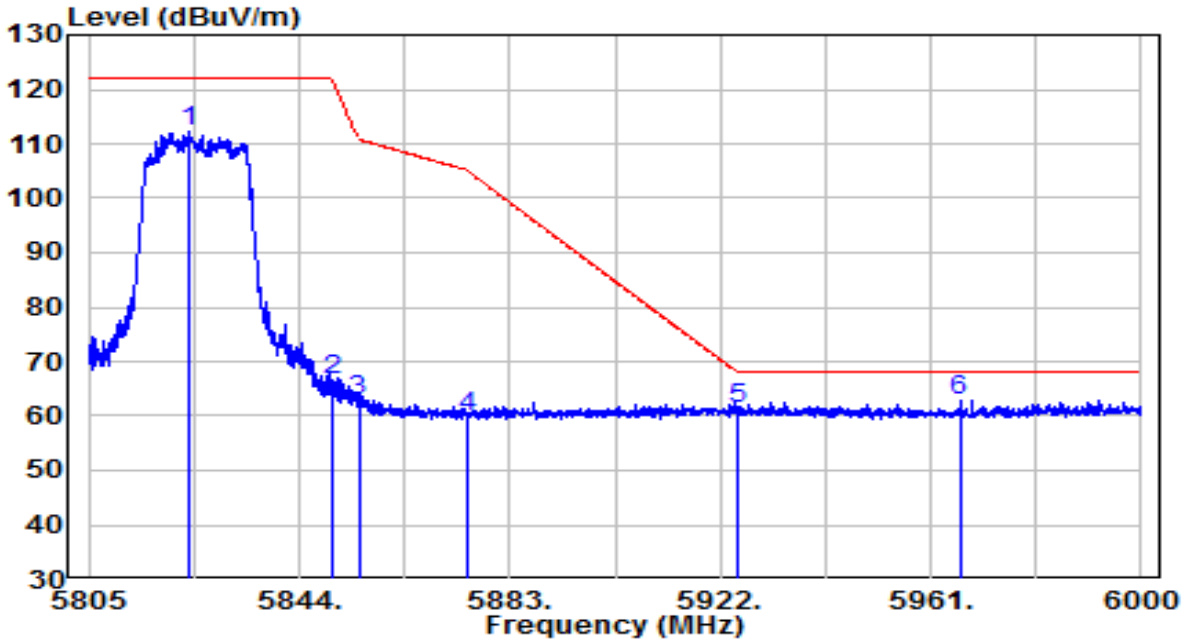


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5823.525	90.83	21.32	112.15	N/A	N/A	Peak
2		5850.000	45.12	21.40	66.52	-55.68	122.20	Peak
3		5855.000	41.51	21.42	62.93	-47.87	110.80	Peak
4		5875.000	38.31	21.49	59.80	-45.40	105.20	Peak
5		5925.000	39.54	21.65	61.19	-7.01	68.20	Peak
6	*	5966.362	40.99	21.78	62.77	-5.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5190MHz	Test Voltage	110V/60Hz

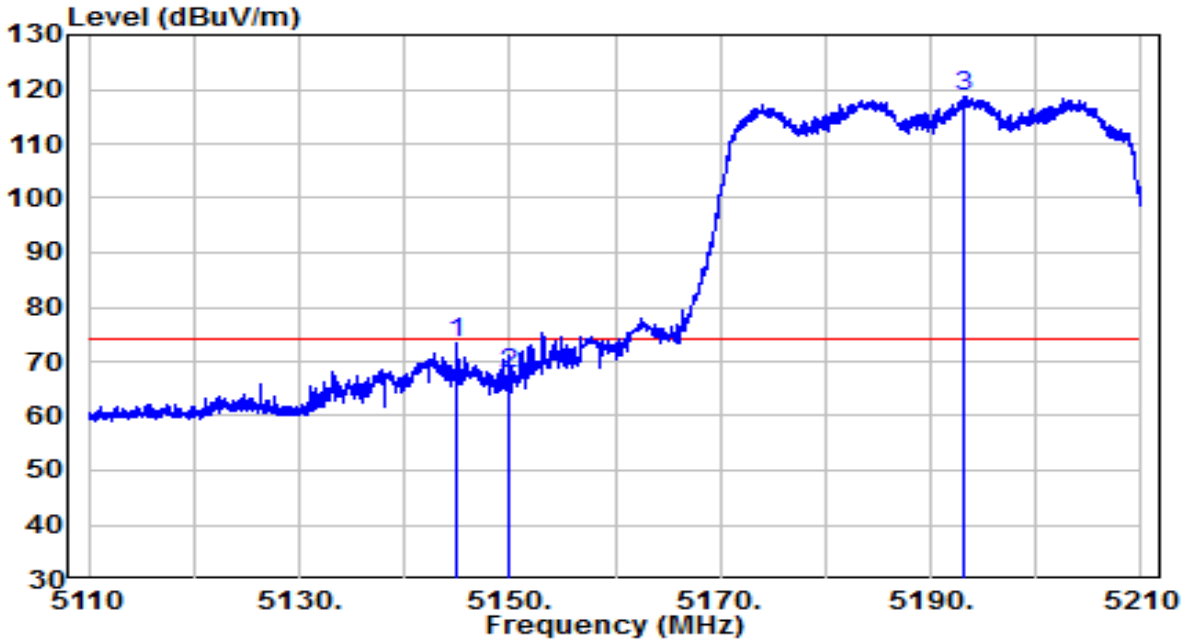


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5144.950	53.47	19.90	73.37	-0.63	74.00	Peak
2		5150.000	47.70	19.91	67.60	-6.40	74.00	Peak
3		5193.050	98.70	19.95	118.65	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5190MHz	Test Voltage	110V/60Hz

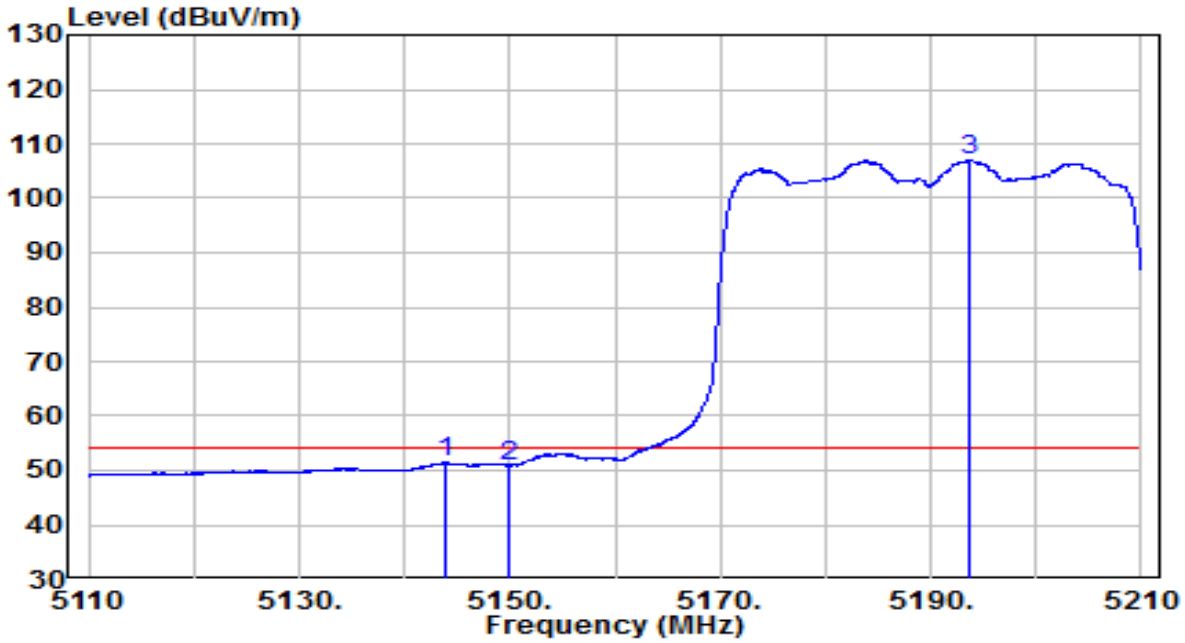


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5143.900	31.56	19.90	51.46	-2.54	54.00	Average
2		5150.000	31.02	19.91	50.93	-3.07	54.00	Average
3		5193.700	87.02	19.95	106.97	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5190MHz	Test Voltage	110V/60Hz

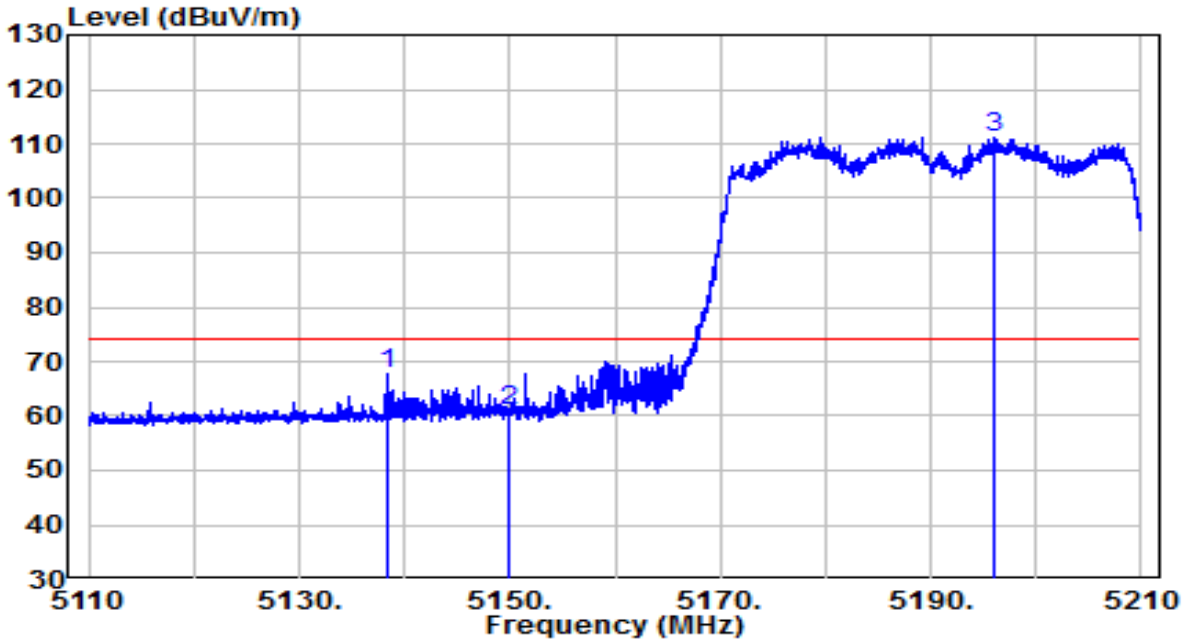


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5138.300	47.73	19.89	67.62	-6.38	74.00	Peak
2		5150.000	41.07	19.91	60.98	-13.02	74.00	Peak
3		5196.000	91.21	19.95	111.17	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5190MHz	Test Voltage	110V/60Hz

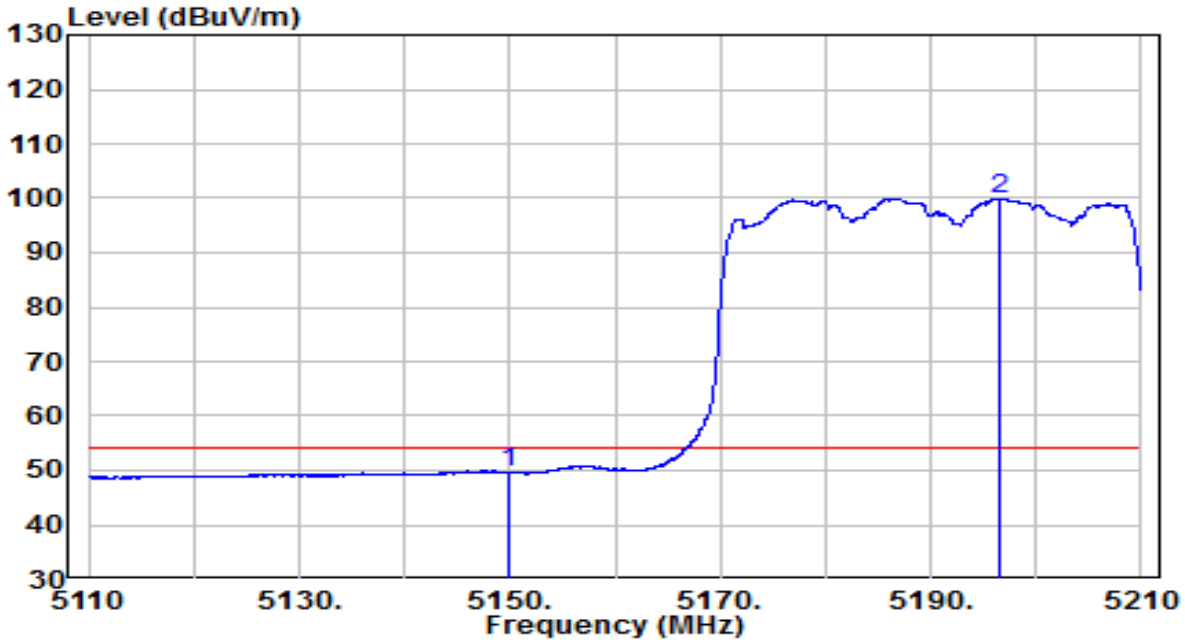


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	29.69	19.91	49.59	-4.41	54.00	Average
2		5196.500	79.98	19.95	99.94	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5230MHz	Test Voltage	110V/60Hz

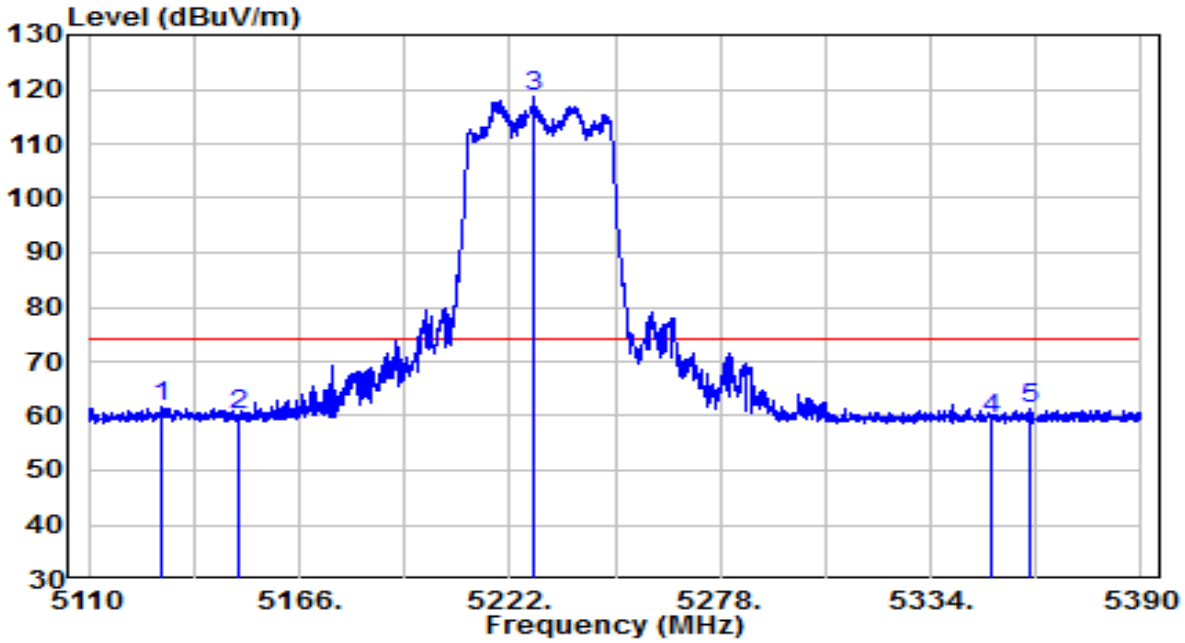


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5129.040	41.67	19.88	61.55	-12.45	74.00	Peak
2		5150.000	40.27	19.91	60.18	-13.82	74.00	Peak
3		5228.300	98.79	19.99	118.78	N/A	N/A	Peak
4		5350.000	39.37	20.11	59.48	-14.52	74.00	Peak
5		5360.460	41.24	20.12	61.37	-12.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5230MHz	Test Voltage	110V/60Hz

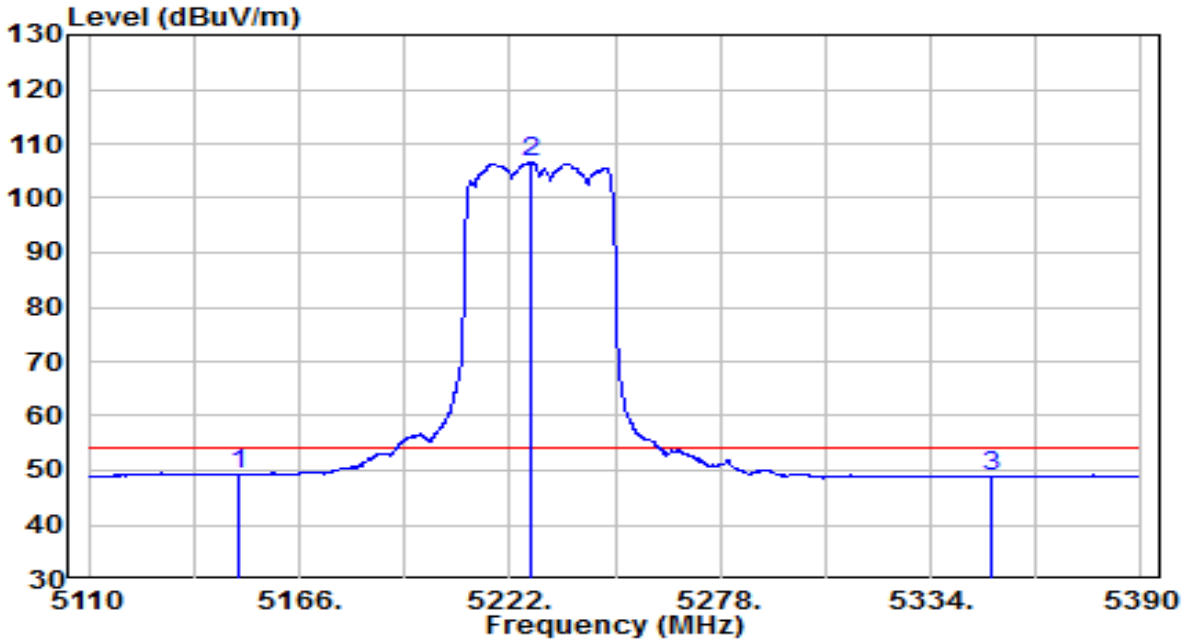


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	29.45	19.91	49.35	-4.65	54.00	Average
2		5227.460	86.78	19.99	106.77	N/A	N/A	Average
3		5350.000	28.75	20.11	48.86	-5.14	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5230MHz	Test Voltage	110V/60Hz

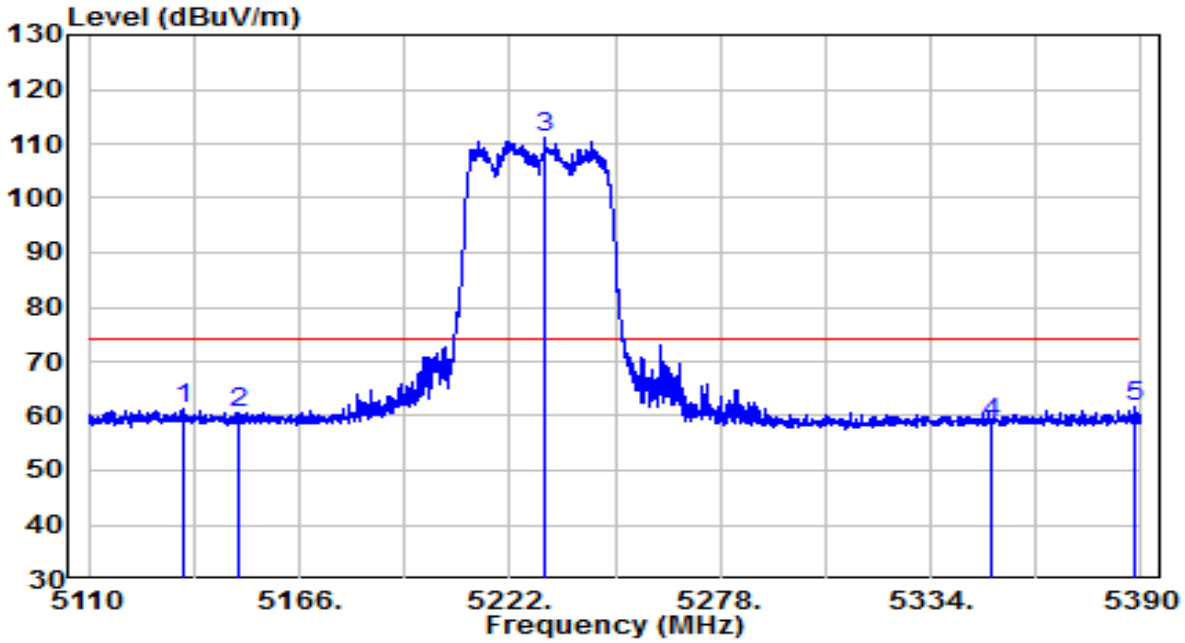


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5135.480	41.32	19.89	61.21	-12.79	74.00	Peak
2		5150.000	40.76	19.91	60.67	-13.33	74.00	Peak
3		5231.240	91.17	19.99	111.16	N/A	N/A	Peak
4		5350.000	38.53	20.11	58.64	-15.36	74.00	Peak
5	*	5388.600	41.41	20.15	61.57	-12.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5230MHz	Test Voltage	110V/60Hz

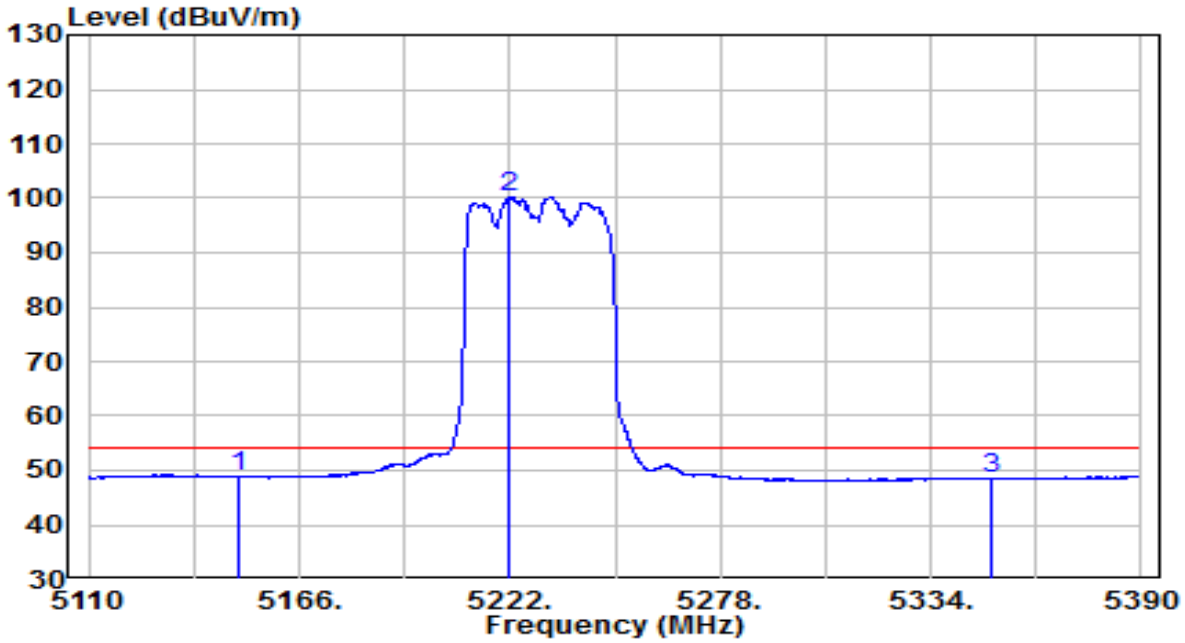


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	28.94	19.91	48.84	-5.16	54.00	Average
2		5221.720	80.21	19.98	100.19	N/A	N/A	Average
3		5350.000	28.36	20.11	48.47	-5.53	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5310MHz	Test Voltage	110V/60Hz

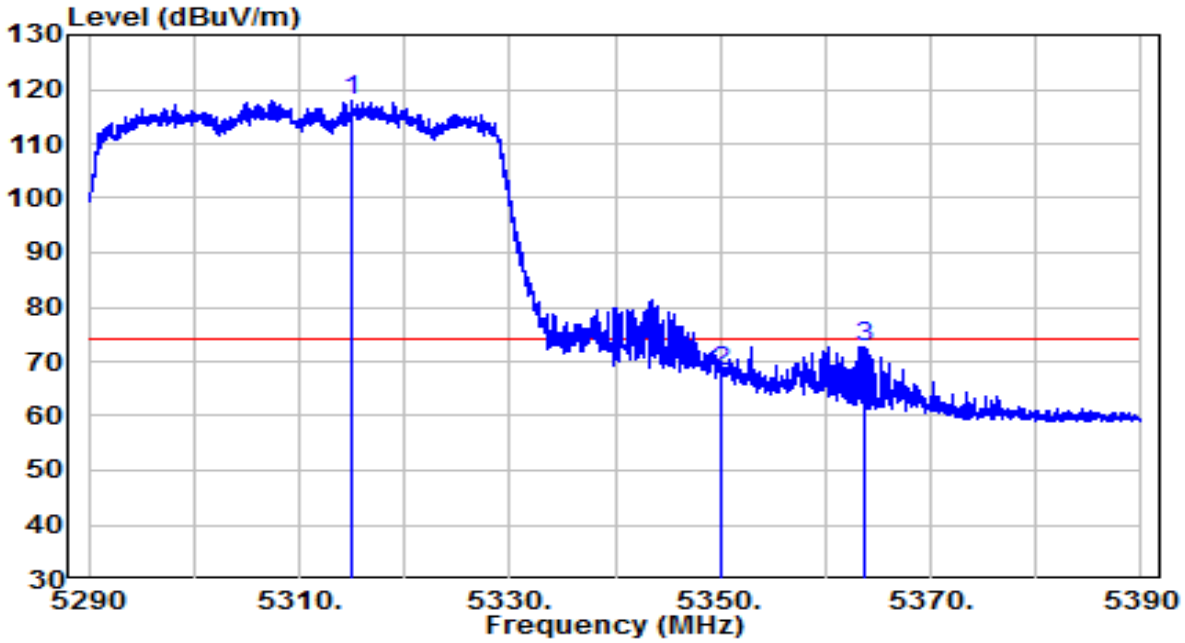


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5315.000	97.71	20.08	117.79	N/A	N/A	Peak
2		5350.000	48.04	20.11	68.15	-5.85	74.00	Peak
3	*	5363.800	52.64	20.13	72.77	-1.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5310MHz	Test Voltage	110V/60Hz

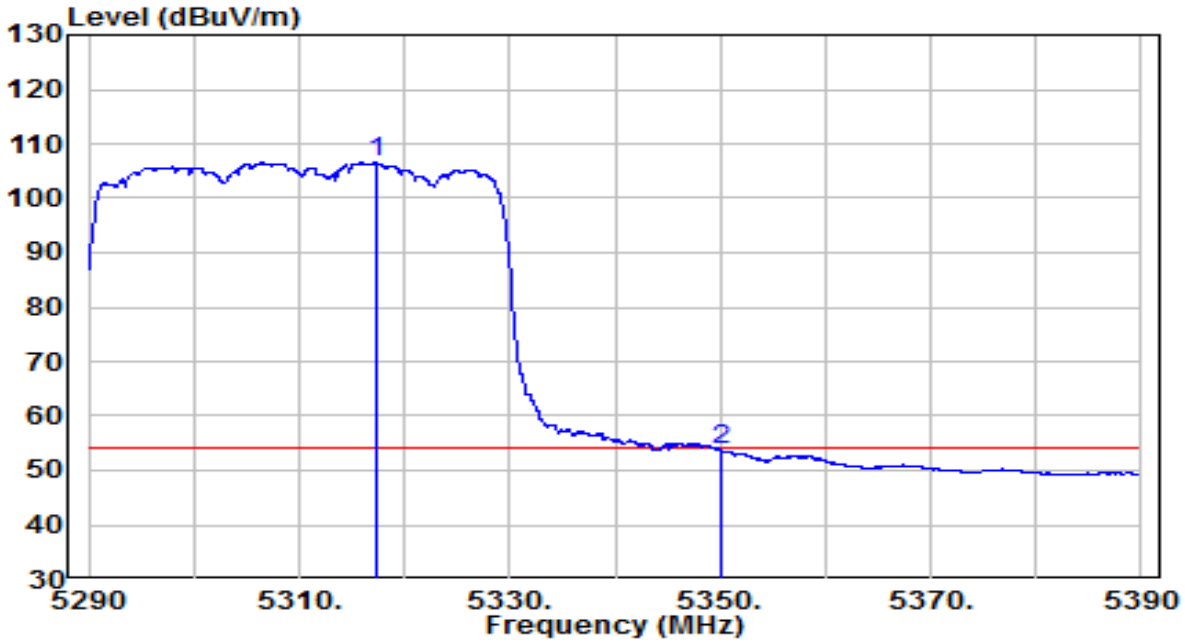


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5317.300	86.39	20.08	106.47	N/A	N/A	Average
2	*	5350.000	33.67	20.11	53.78	-0.22	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5310MHz	Test Voltage	110V/60Hz

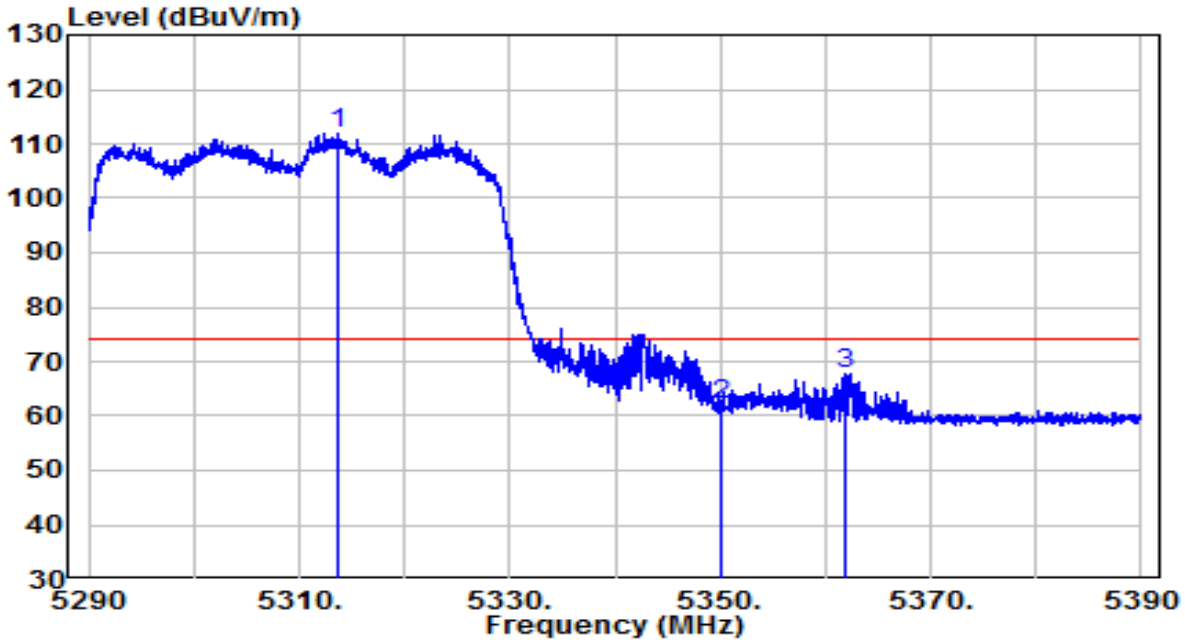


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5313.650	91.88	20.08	111.95	N/A	N/A	Peak
2		5350.000	42.13	20.11	62.25	-11.75	74.00	Peak
3	*	5361.900	47.55	20.13	67.67	-6.33	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5310MHz	Test Voltage	110V/60Hz

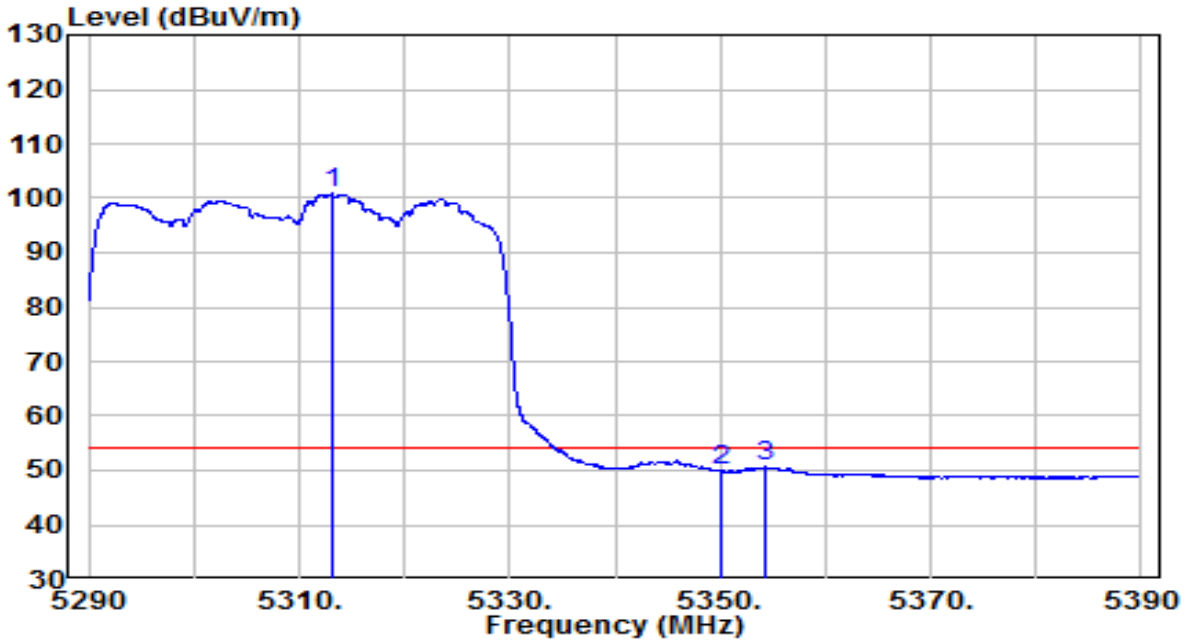


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5313.200	80.76	20.08	100.83	N/A	N/A	Average
2		5350.000	29.71	20.11	49.82	-4.18	54.00	Average
3	*	5354.250	30.55	20.12	50.66	-3.34	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5510MHz	Test Voltage	110V/60Hz

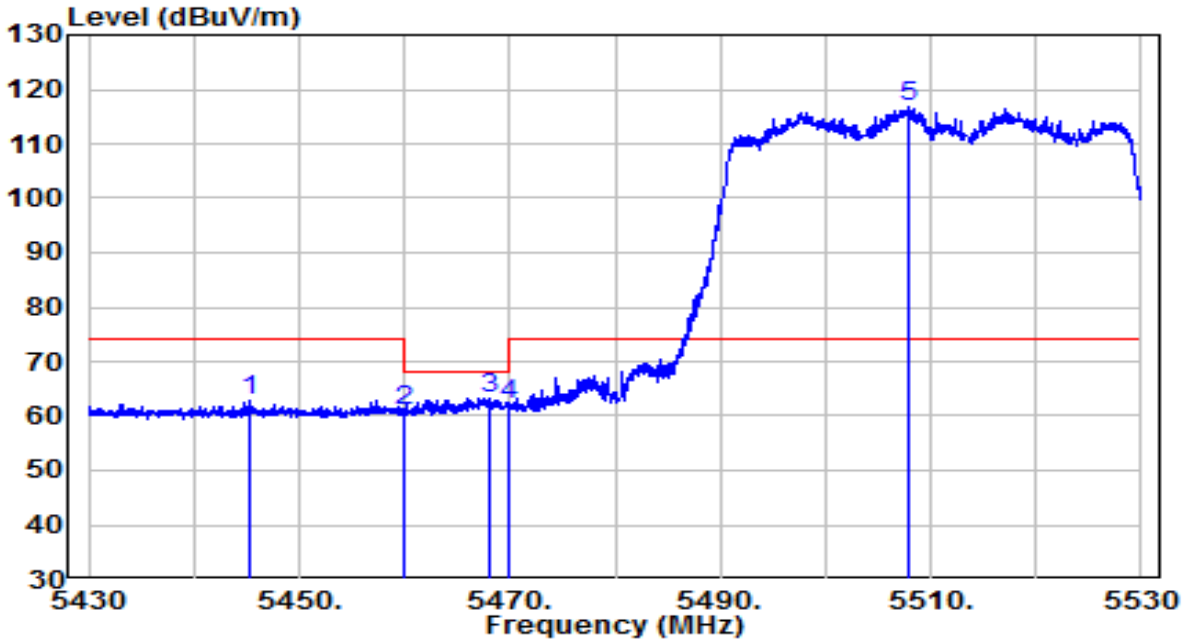


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5445.350	42.50	20.21	62.72	-11.28	74.00	Peak
2		5460.000	40.63	20.23	60.86	-7.34	68.20	Peak
3	*	5468.000	43.14	20.24	63.38	-4.82	68.20	Peak
4		5470.000	41.80	20.24	62.03	-6.17	68.20	Peak
5		5507.800	96.67	20.30	116.96	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5510MHz	Test Voltage	110V/60Hz

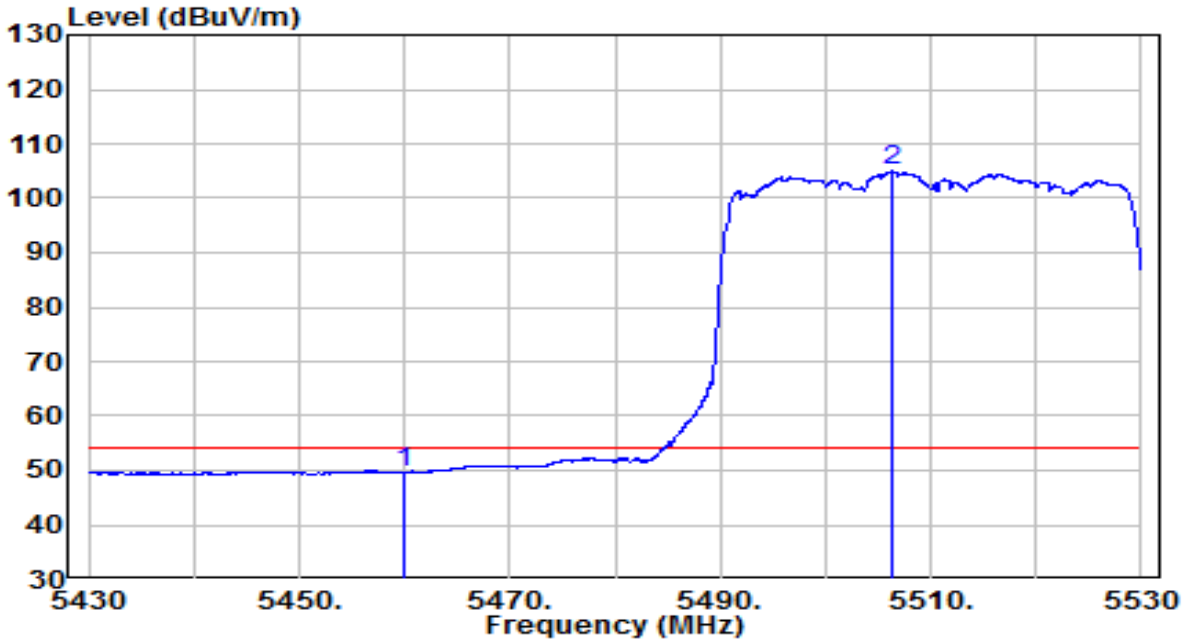


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5460.000	29.48	20.23	49.71	-4.29	54.00	Average
2		5506.300	84.62	20.29	104.91	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5510MHz	Test Voltage	110V/60Hz

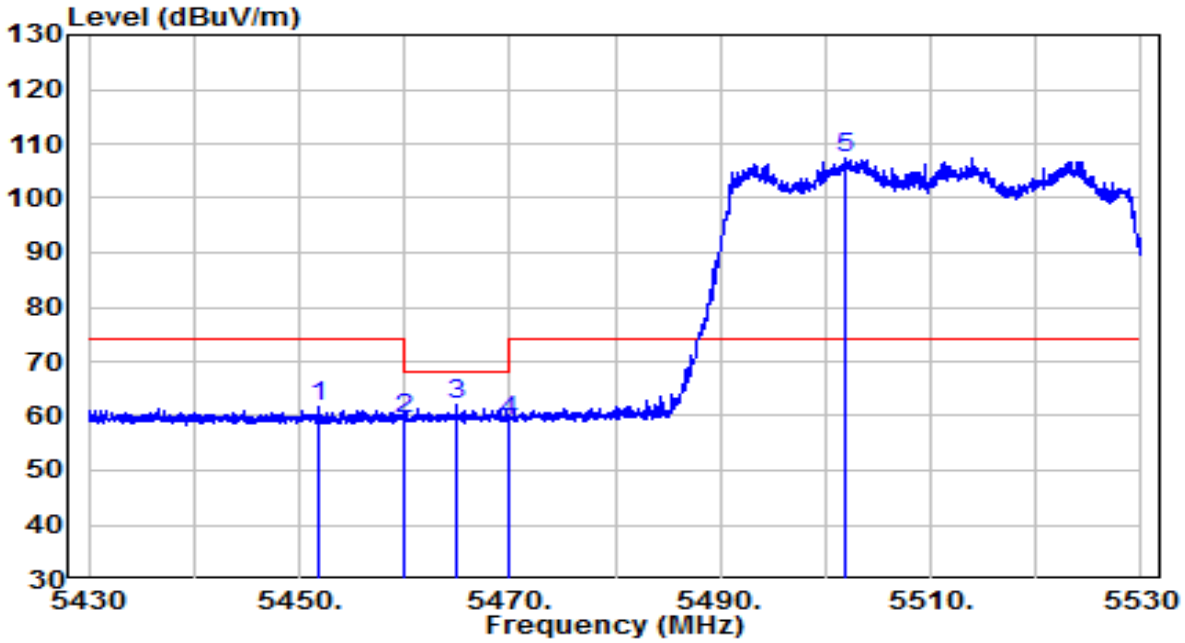


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5451.950	41.42	20.22	61.64	-12.36	74.00	Peak
2		5460.000	39.17	20.23	59.39	-8.81	68.20	Peak
3	*	5465.000	41.72	20.23	61.96	-6.24	68.20	Peak
4		5470.000	38.89	20.24	59.13	-9.07	68.20	Peak
5		5501.800	87.04	20.28	107.32	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5510MHz	Test Voltage	110V/60Hz

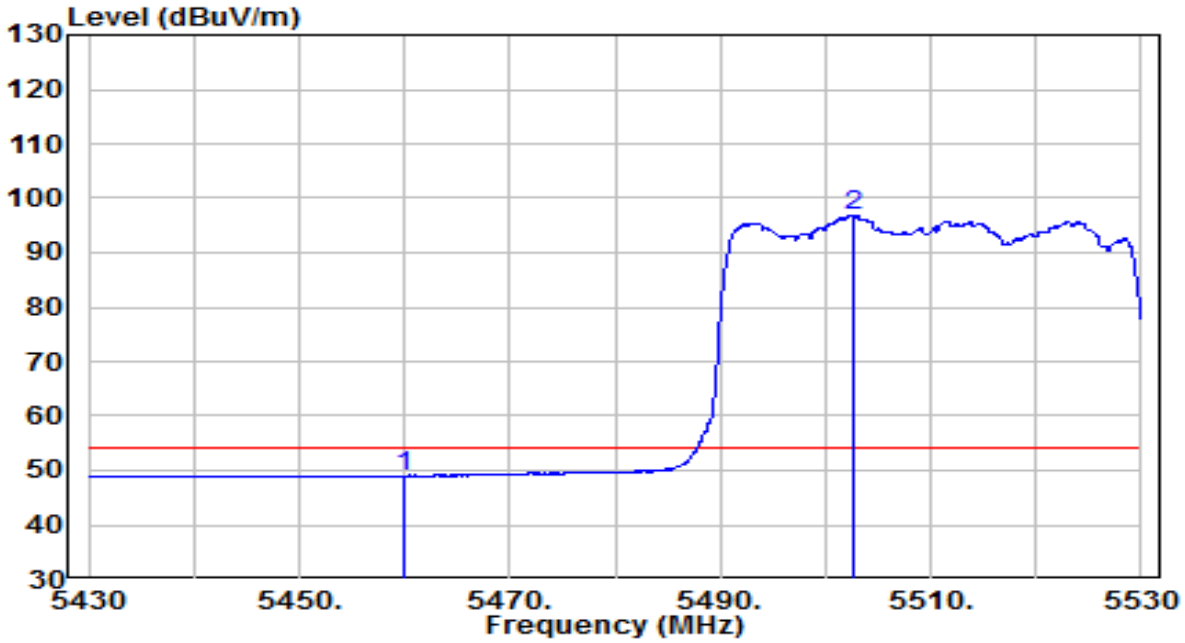


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5460.000	28.74	20.23	48.97	-5.03	54.00	Average
2		5502.600	76.60	20.28	96.88	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5670MHz	Test Voltage	110V/60Hz

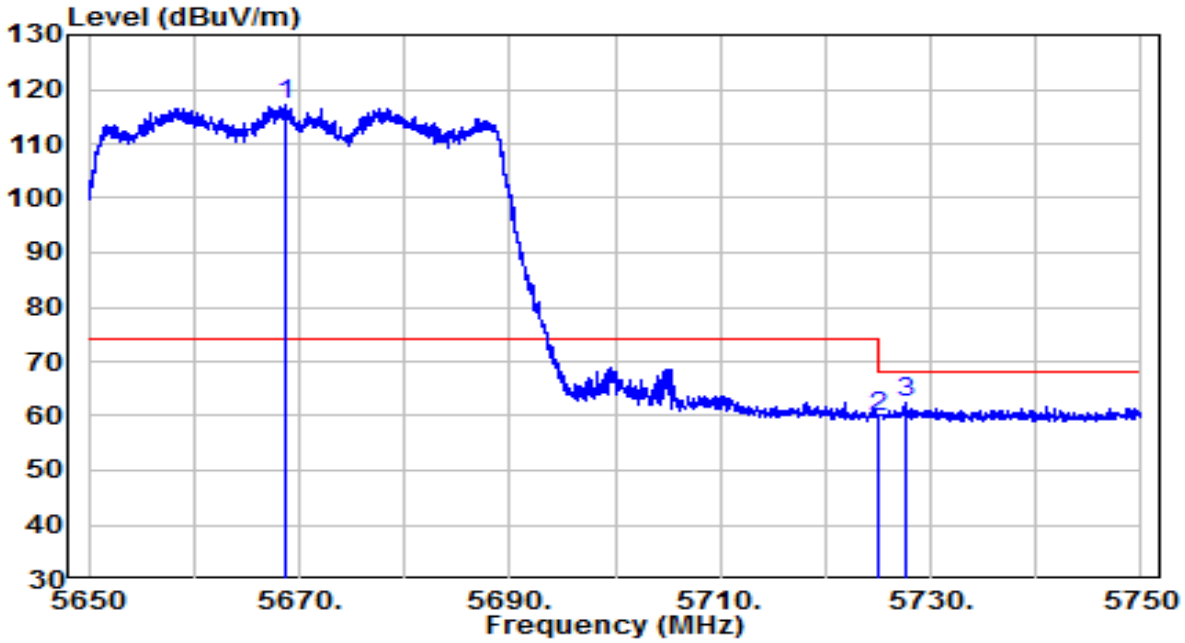


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5668.650	96.36	20.82	117.18	N/A	N/A	Peak
2		5725.000	38.70	21.00	59.70	-8.50	68.20	Peak
3	*	5727.550	41.41	21.01	62.42	-5.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5670MHz	Test Voltage	110V/60Hz

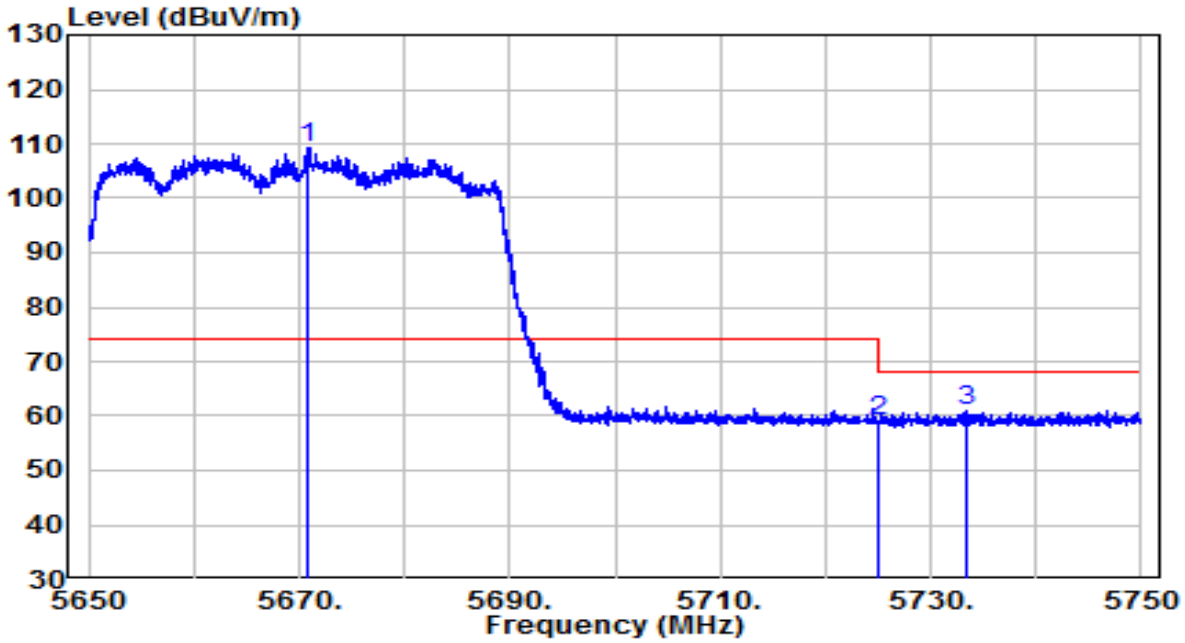


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5670.700	88.55	20.82	109.38	N/A	N/A	Peak
2		5725.000	38.14	21.00	59.14	-9.06	68.20	Peak
3	*	5733.300	40.02	21.03	61.04	-7.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5755MHz	Test Voltage	110V/60Hz

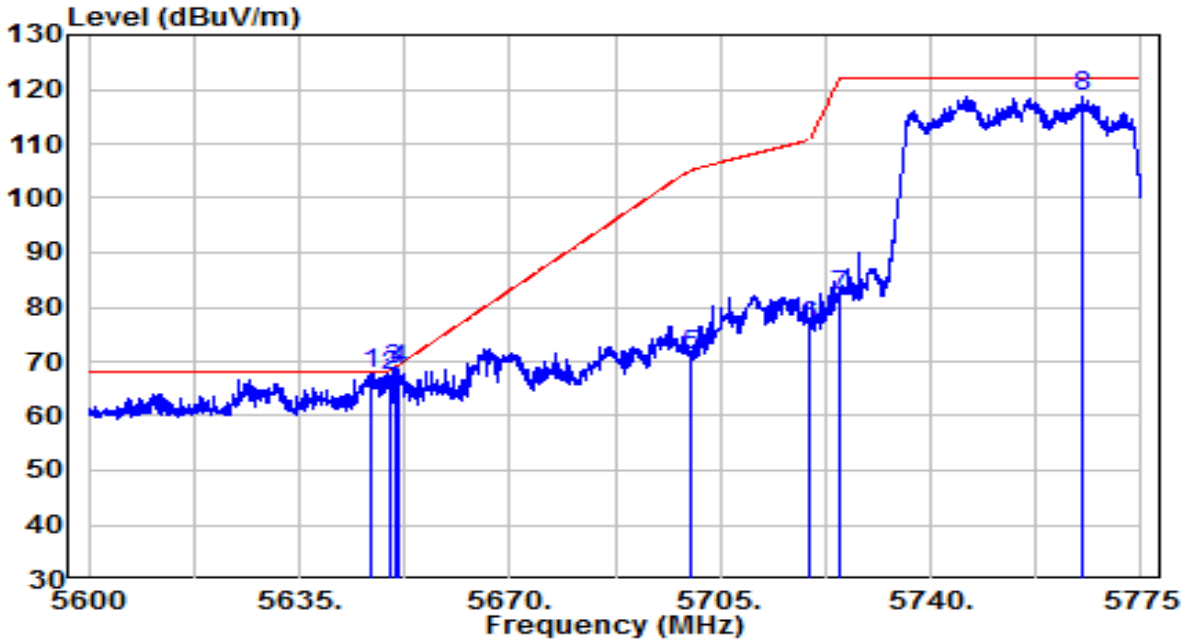


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5646.987	46.97	20.75	67.72	-0.48	68.20	Peak
2		5650.000	46.57	20.76	67.32	-0.88	68.20	Peak
3	*	5650.837	47.63	20.76	68.39	-0.43	68.82	Peak
4		5651.712	47.68	20.76	68.44	-1.03	69.47	Peak
5		5700.000	50.14	20.92	71.06	-34.14	105.20	Peak
6		5720.000	55.51	20.98	76.50	-34.30	110.80	Peak
7		5725.000	61.10	21.00	82.10	-40.10	122.20	Peak
8		5765.375	97.49	21.13	118.62	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5755MHz	Test Voltage	110V/60Hz

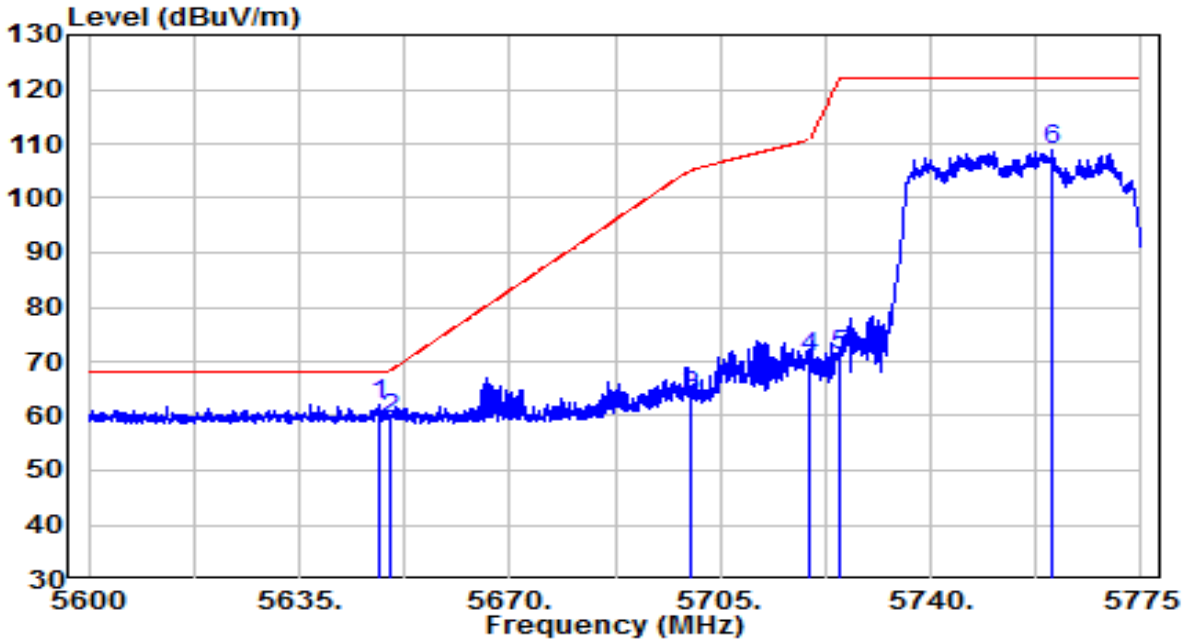


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5648.300	41.43	20.75	62.18	-6.02	68.20	Peak
2		5650.000	38.68	20.76	59.43	-8.77	68.20	Peak
3		5700.000	42.84	20.92	63.76	-41.44	105.20	Peak
4		5720.000	49.74	20.98	70.72	-40.08	110.80	Peak
5		5725.000	50.02	21.00	71.02	-51.18	122.20	Peak
6		5760.300	87.90	21.11	109.01	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5795MHz	Test Voltage	110V/60Hz

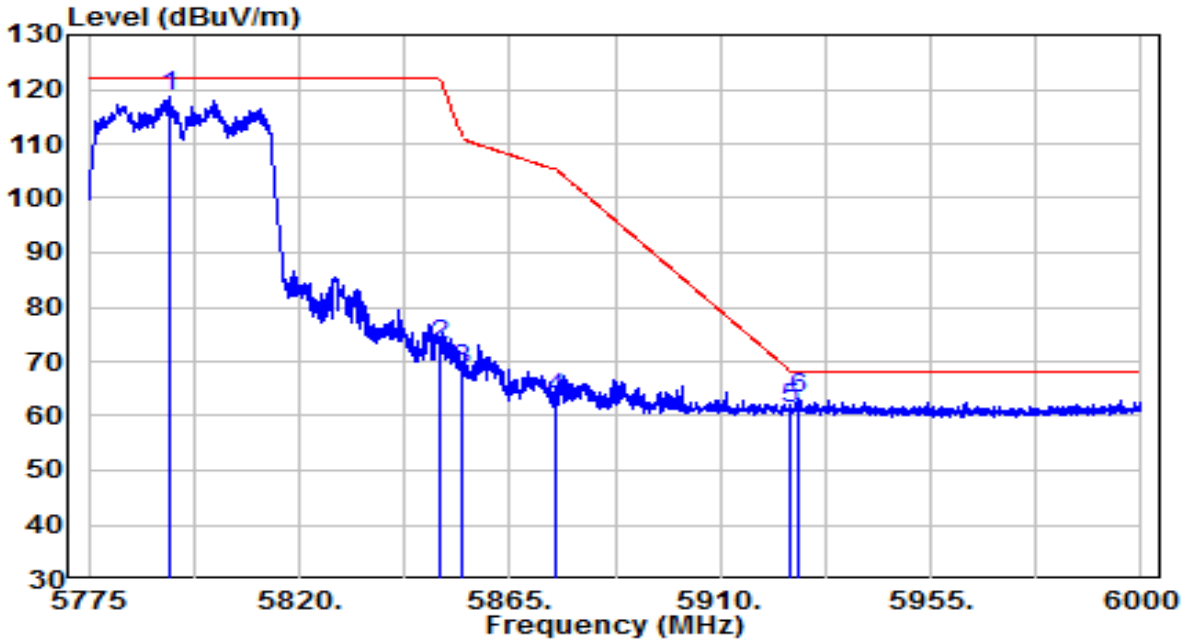


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5792.212	97.57	21.22	118.78	N/A	N/A	Peak
2		5850.000	51.47	21.40	72.87	-49.33	122.20	Peak
3		5855.000	47.08	21.42	68.50	-42.30	110.80	Peak
4		5875.000	41.65	21.49	63.13	-42.07	105.20	Peak
5		5925.000	39.58	21.65	61.23	-6.97	68.20	Peak
6	*	5926.875	41.41	21.65	63.07	-5.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5795MHz	Test Voltage	110V/60Hz

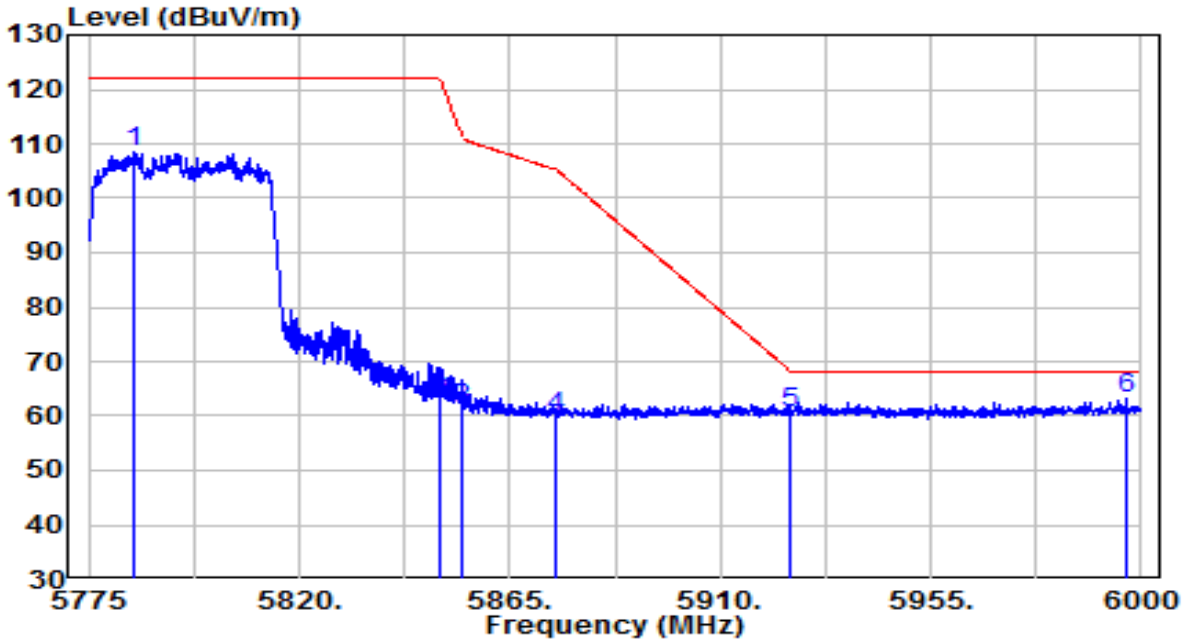


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5784.675	87.40	21.19	108.60	N/A	N/A	Peak
2		5850.000	41.05	21.40	62.45	-59.75	122.20	Peak
3		5855.000	39.78	21.42	61.20	-49.60	110.80	Peak
4		5875.000	38.51	21.49	59.99	-45.21	105.20	Peak
5		5925.000	38.99	21.65	60.64	-7.56	68.20	Peak
6	*	5996.737	41.22	21.88	63.10	-5.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

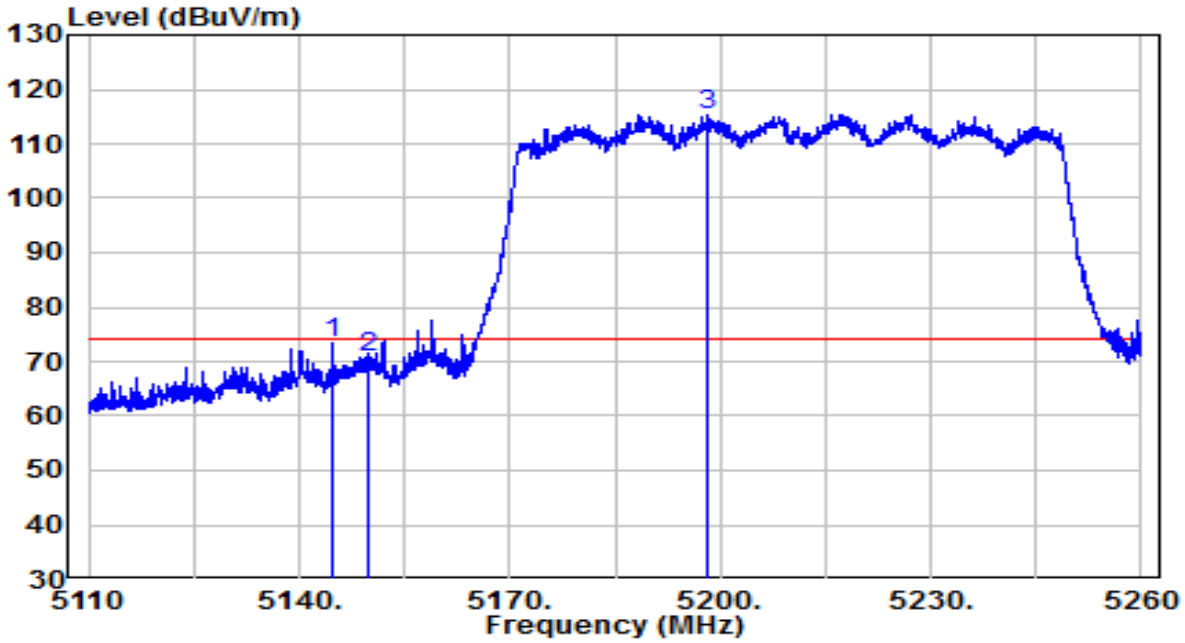


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5144.875	53.59	19.90	73.49	-0.51	74.00	Peak
2		5150.000	50.90	19.91	70.80	-3.20	74.00	Peak
3		5198.275	95.37	19.96	115.33	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

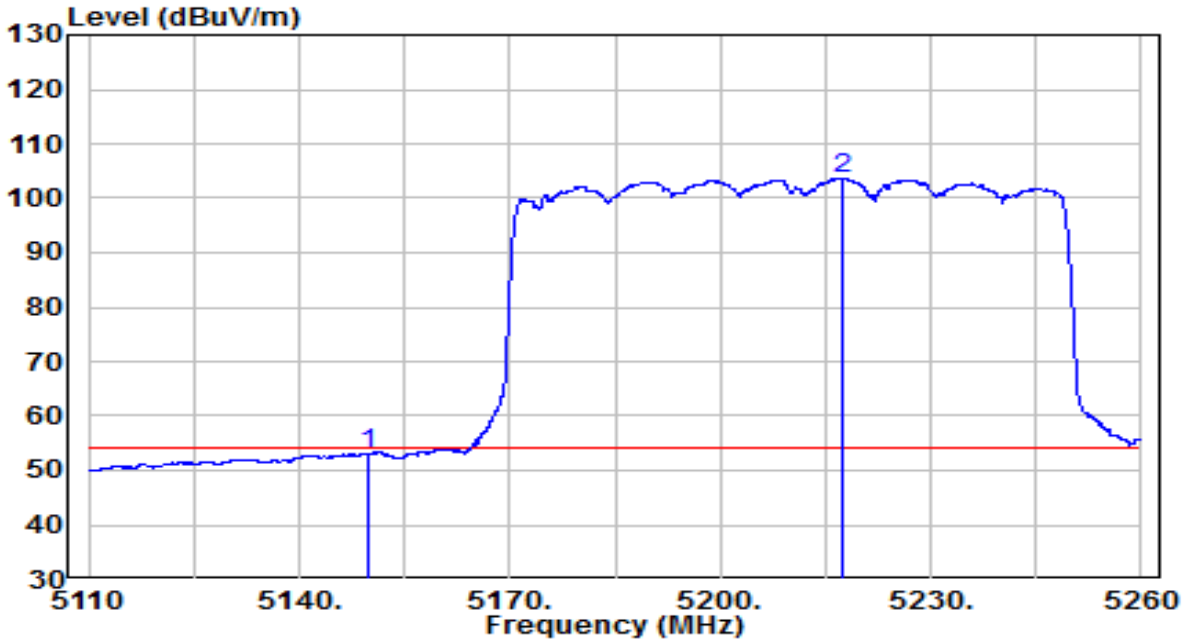


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	33.17	19.91	53.07	-0.93	54.00	Average
2		5217.475	83.77	19.98	103.75	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

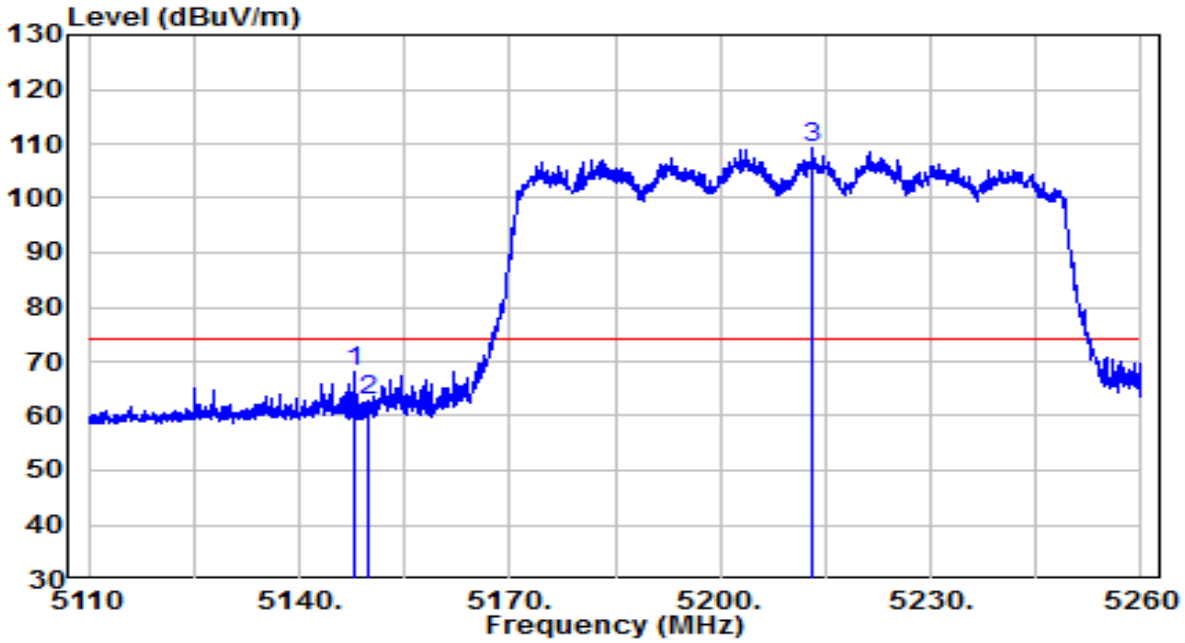


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5148.025	48.24	19.90	68.14	-5.86	74.00	Peak
2		5150.000	42.93	19.91	62.83	-11.17	74.00	Peak
3		5213.050	89.35	19.97	109.33	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

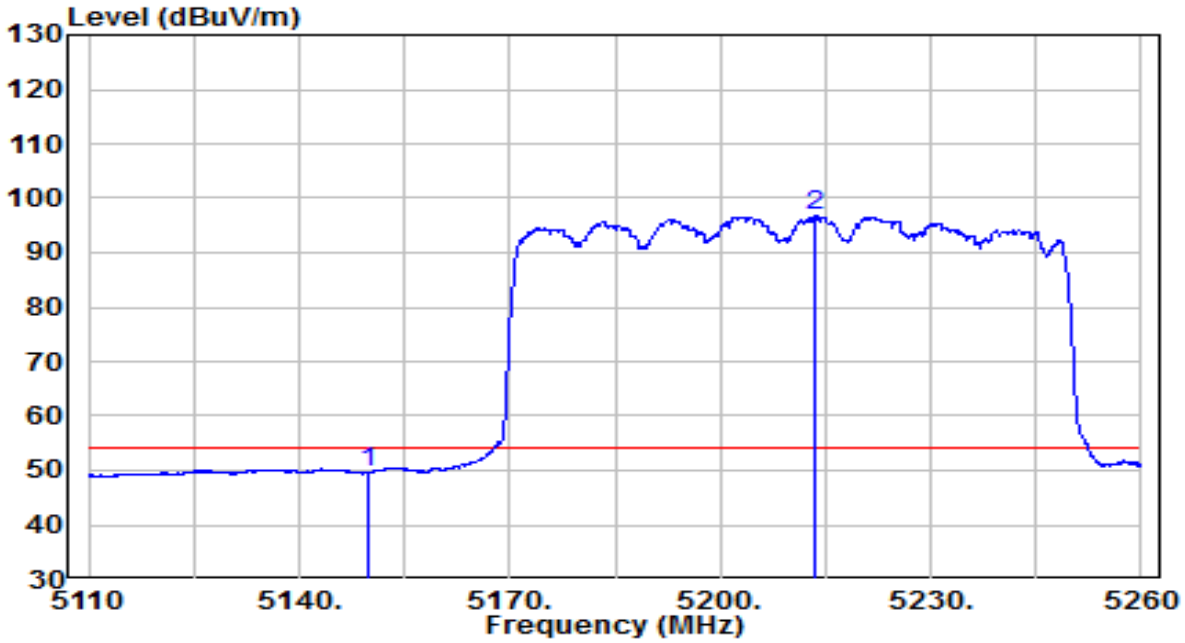


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	29.68	19.91	49.59	-4.41	54.00	Average
2		5213.650	76.70	19.97	96.68	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5290MHz	Test Voltage	110V/60Hz

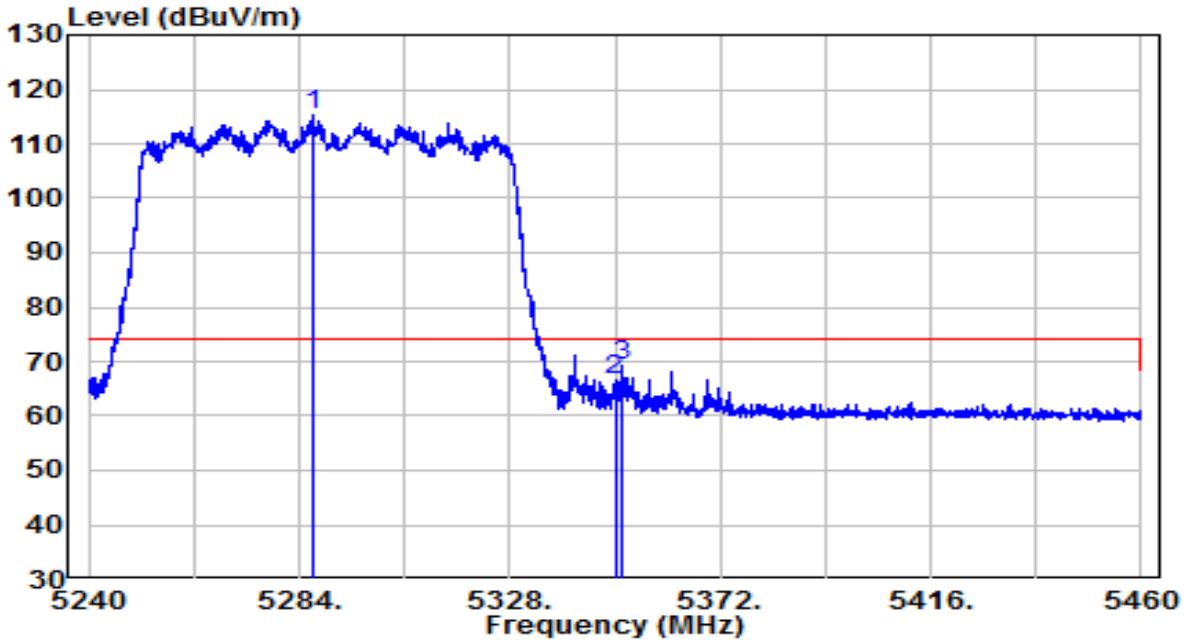


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5286.860	95.24	20.05	115.29	N/A	N/A	Peak
2		5350.000	46.61	20.11	66.72	-7.28	74.00	Peak
3	*	5351.650	49.07	20.12	69.19	-4.81	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5290MHz	Test Voltage	110V/60Hz

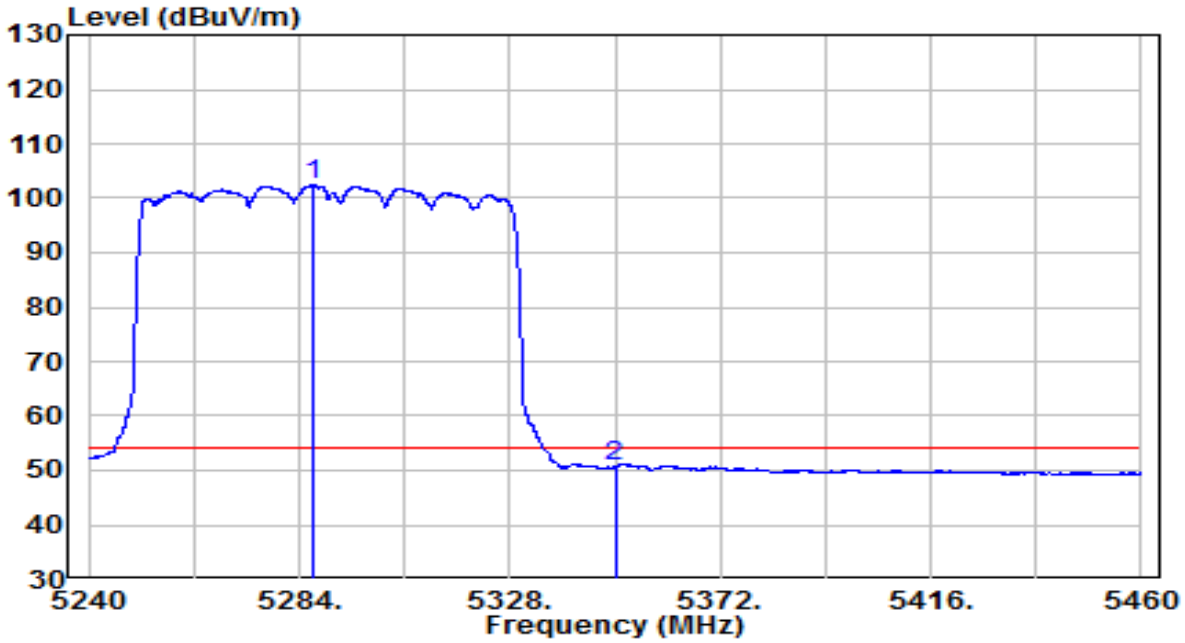


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5286.970	82.47	20.05	102.51	N/A	N/A	Average
2	*	5350.000	30.61	20.11	50.72	-3.28	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5290MHz	Test Voltage	110V/60Hz

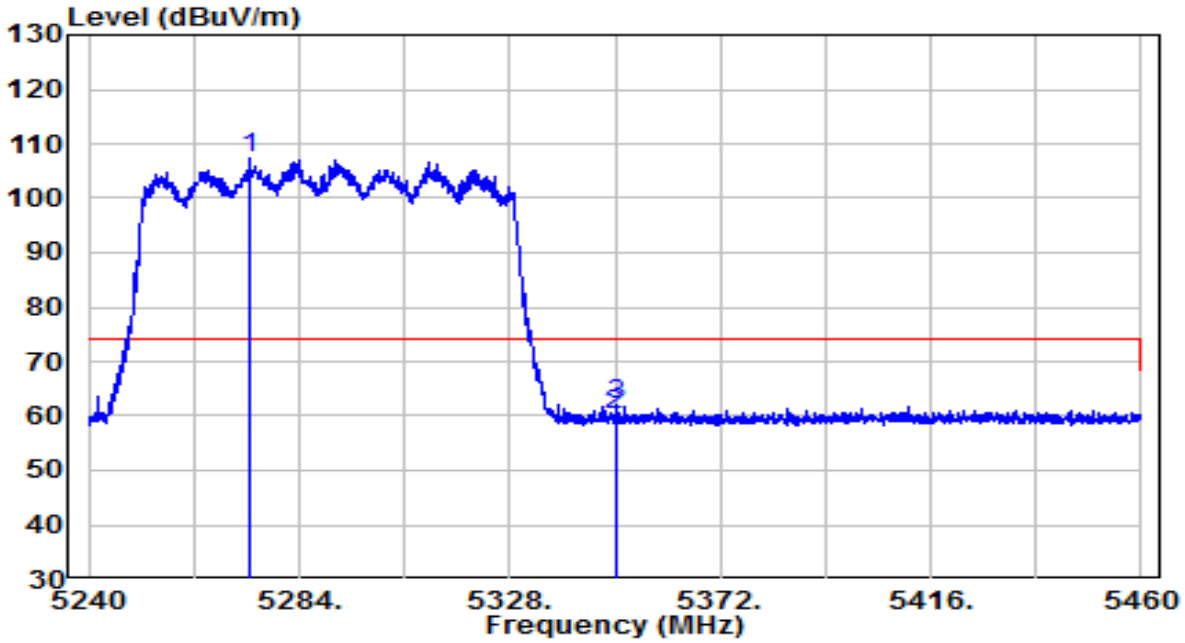


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5273.550	87.15	20.03	107.18	N/A	N/A	Peak
2		5350.000	39.94	20.11	60.05	-13.95	74.00	Peak
3	*	5350.550	42.11	20.11	62.22	-11.78	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5290MHz	Test Voltage	110V/60Hz

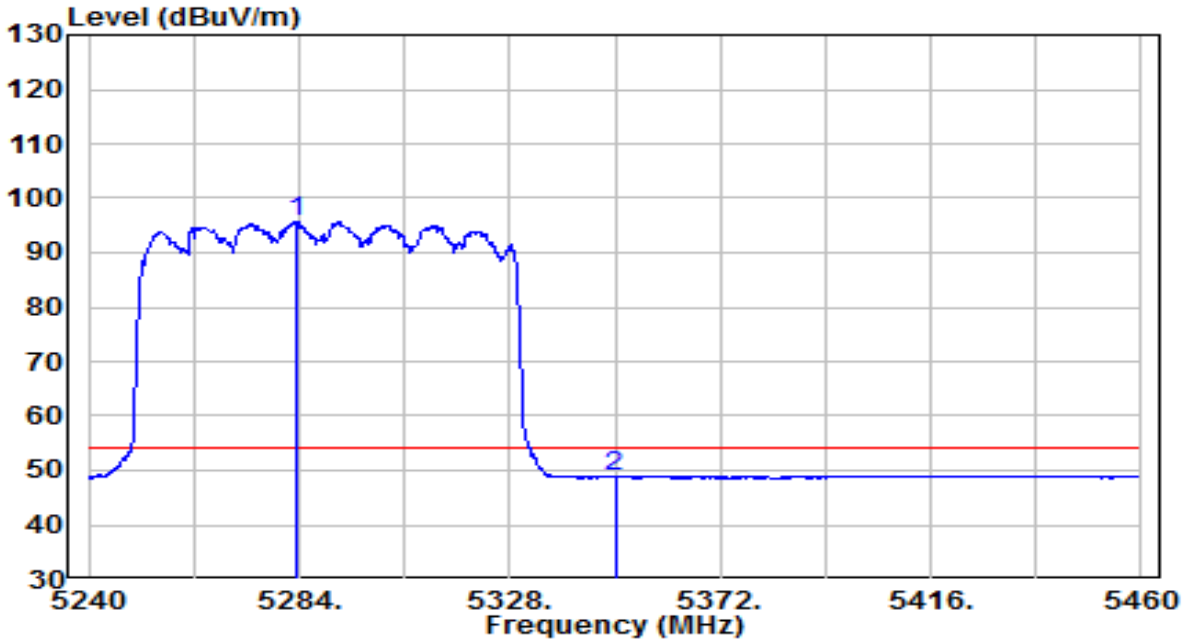


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5283.340	75.72	20.04	95.77	N/A	N/A	Average
2	*	5350.000	28.78	20.11	48.89	-5.11	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5530MHz	Test Voltage	110V/60Hz

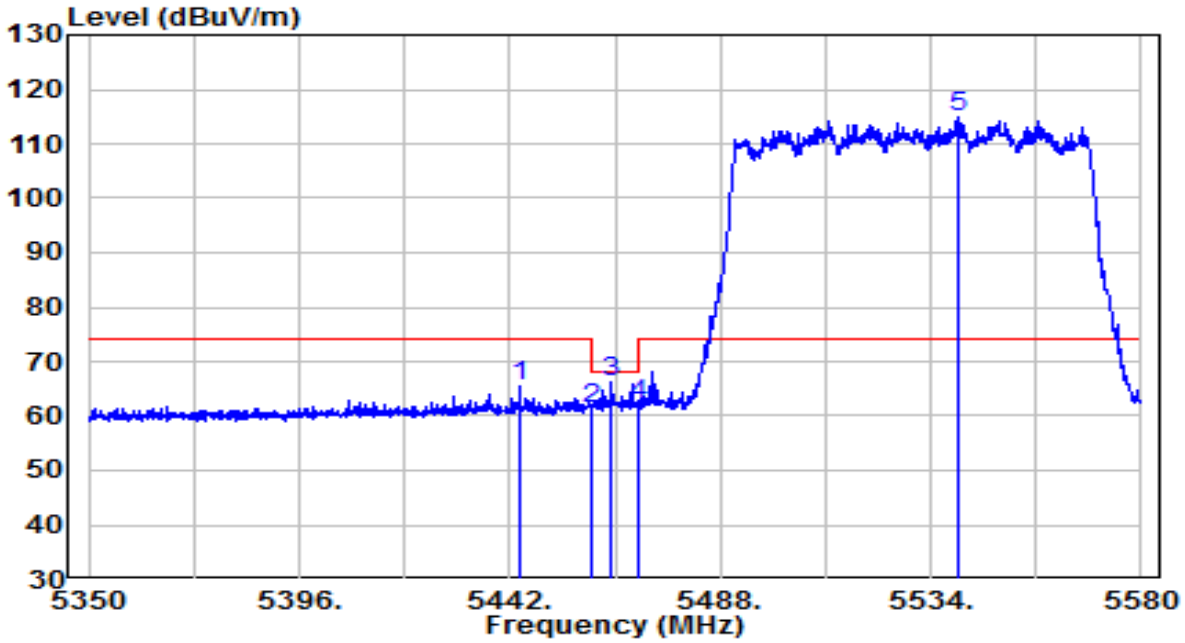


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5444.185	45.44	20.21	65.66	-8.34	74.00	Peak
2		5460.000	41.12	20.23	61.35	-6.85	68.20	Peak
3	*	5464.310	46.01	20.23	66.24	-1.96	68.20	Peak
4		5470.000	41.97	20.24	62.21	-5.99	68.20	Peak
5		5540.210	94.45	20.40	114.85	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5530MHz	Test Voltage	110V/60Hz

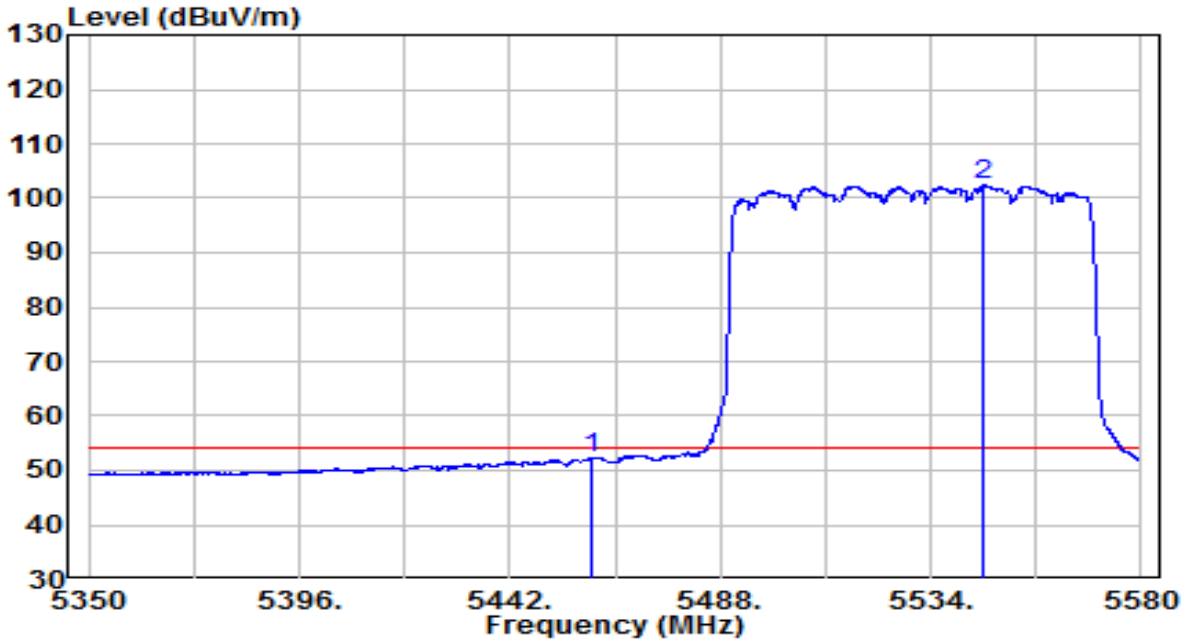


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5460.000	31.92	20.23	52.15	-1.85	54.00	Average
2		5545.500	81.91	20.42	102.33	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5530MHz	Test Voltage	110V/60Hz

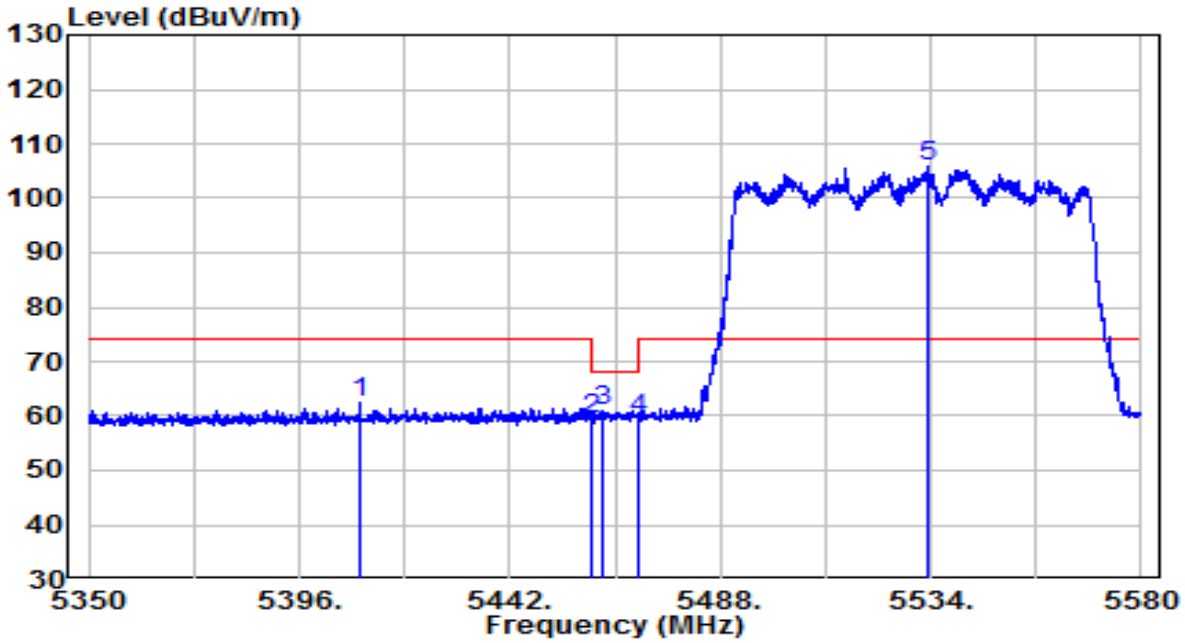


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5409.225	42.28	20.18	62.46	-11.54	74.00	Peak
2		5460.000	39.18	20.23	59.40	-8.80	68.20	Peak
3	*	5462.470	40.89	20.23	61.12	-7.08	68.20	Peak
4		5470.000	39.20	20.24	59.43	-8.77	68.20	Peak
5		5533.310	85.40	20.38	105.78	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5530MHz	Test Voltage	110V/60Hz

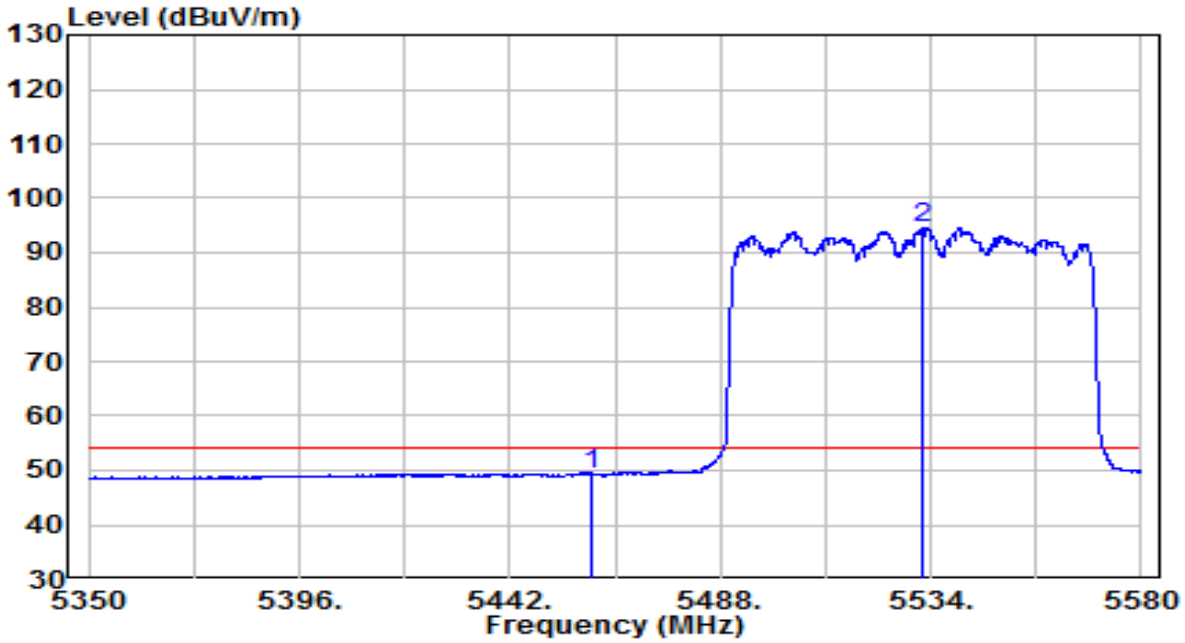


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5460.000	29.07	20.23	49.30	-4.70	54.00	Average
2		5532.390	74.14	20.37	94.52	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5610MHz	Test Voltage	110V/60Hz

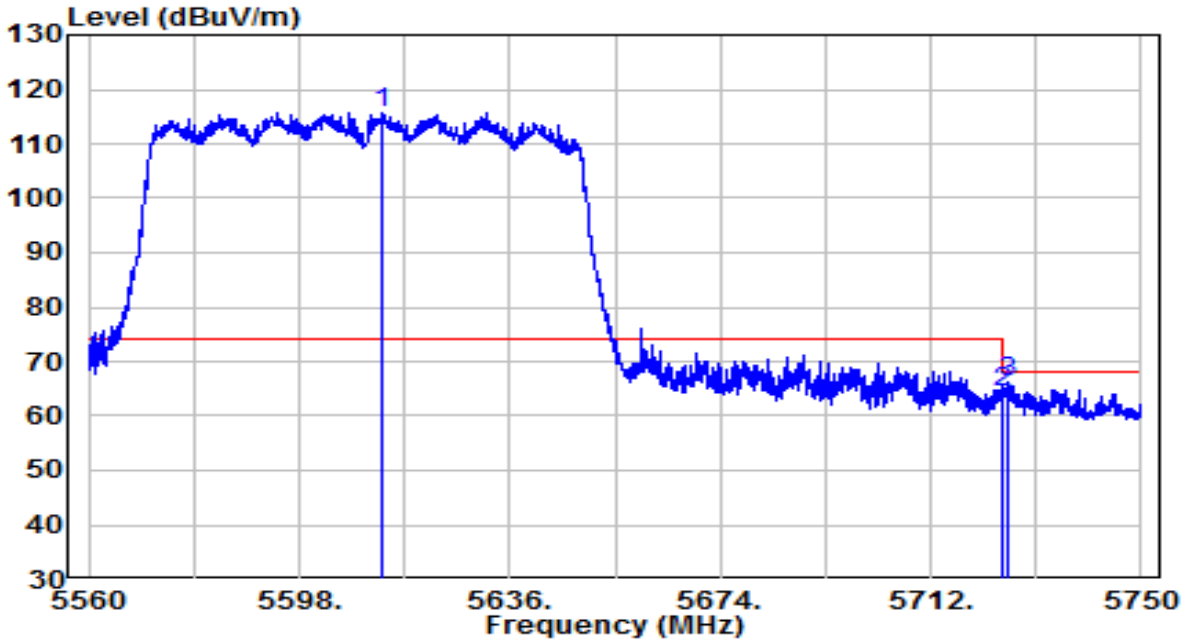


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5612.915	95.18	20.64	115.81	N/A	N/A	Peak
2		5725.000	43.24	21.00	64.24	-3.96	68.20	Peak
3	*	5725.775	45.17	21.00	66.17	-2.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5610MHz	Test Voltage	110V/60Hz

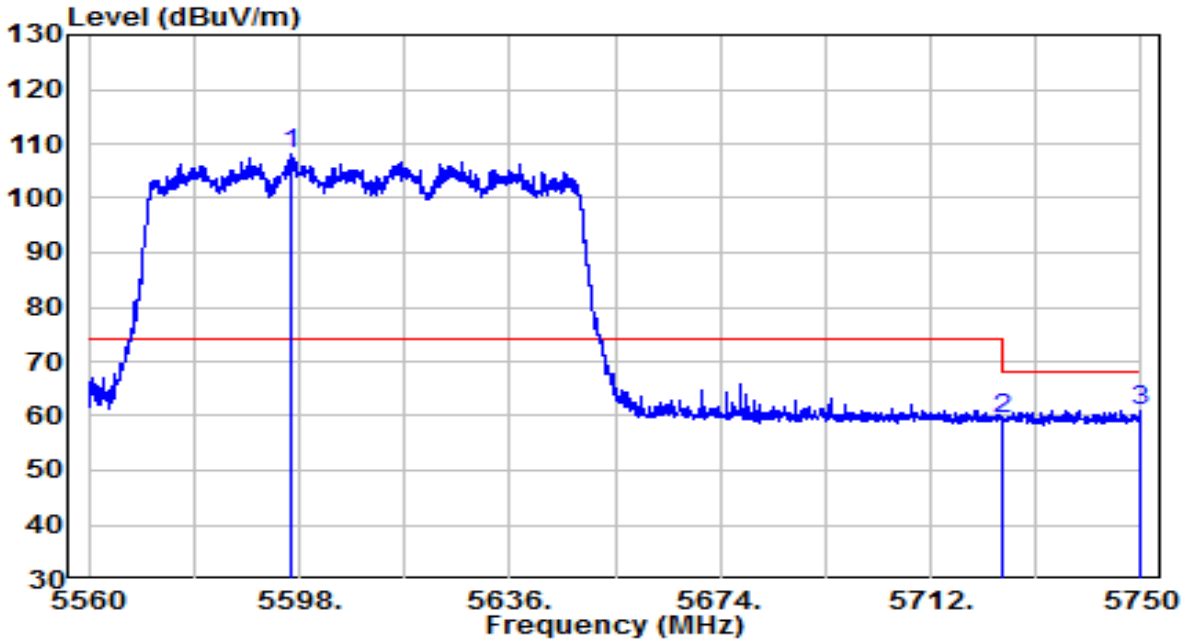


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5596.290	87.65	20.58	108.24	N/A	N/A	Peak
2		5725.000	38.45	21.00	59.44	-8.76	68.20	Peak
3	*	5749.905	40.02	21.08	61.10	-7.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5775MHz	Test Voltage	110V/60Hz

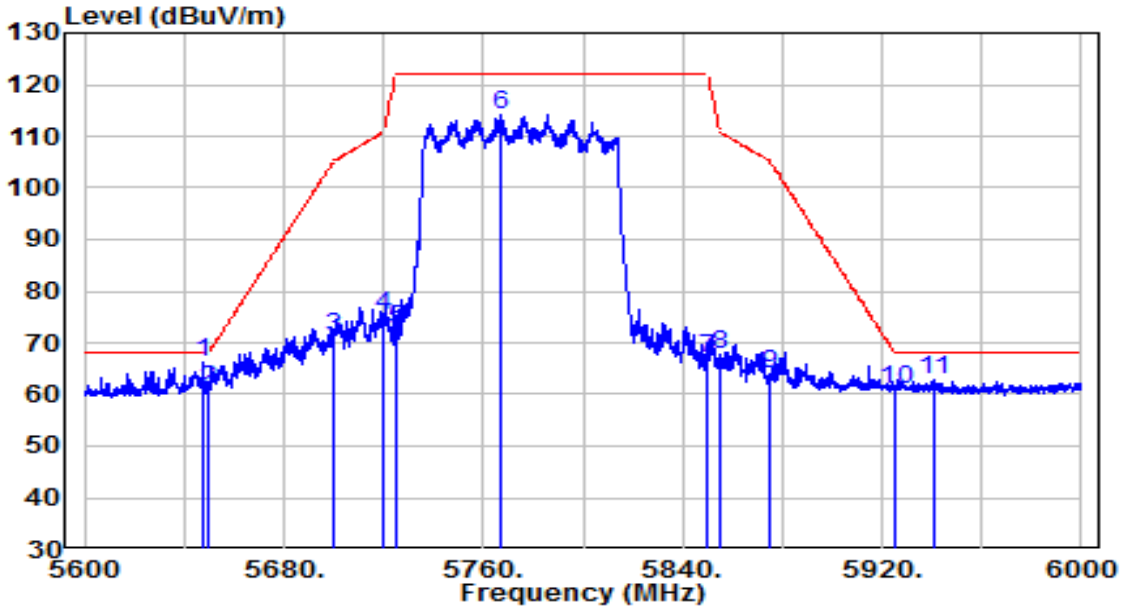

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5647.400	45.38	20.75	66.13	-2.07	68.20	Peak
2		5650.000	40.33	20.76	61.09	-7.11	68.20	Peak
3		5700.000	50.20	20.92	71.12	-34.08	105.20	Peak
4		5720.000	54.16	20.98	75.14	-35.66	110.80	Peak
5		5725.000	51.78	21.00	72.78	-49.42	122.20	Peak
6		5767.200	92.97	21.14	114.11	N/A	N/A	Peak
7		5850.000	45.74	21.40	67.15	-55.05	122.20	Peak
8		5855.000	46.36	21.42	67.78	-43.02	110.80	Peak
9		5875.000	42.41	21.49	63.90	-41.30	105.20	Peak
10		5925.000	39.35	21.65	61.00	-7.20	68.20	Peak
11		5940.600	41.11	21.70	62.81	-5.39	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5775MHz	Test Voltage	110V/60Hz

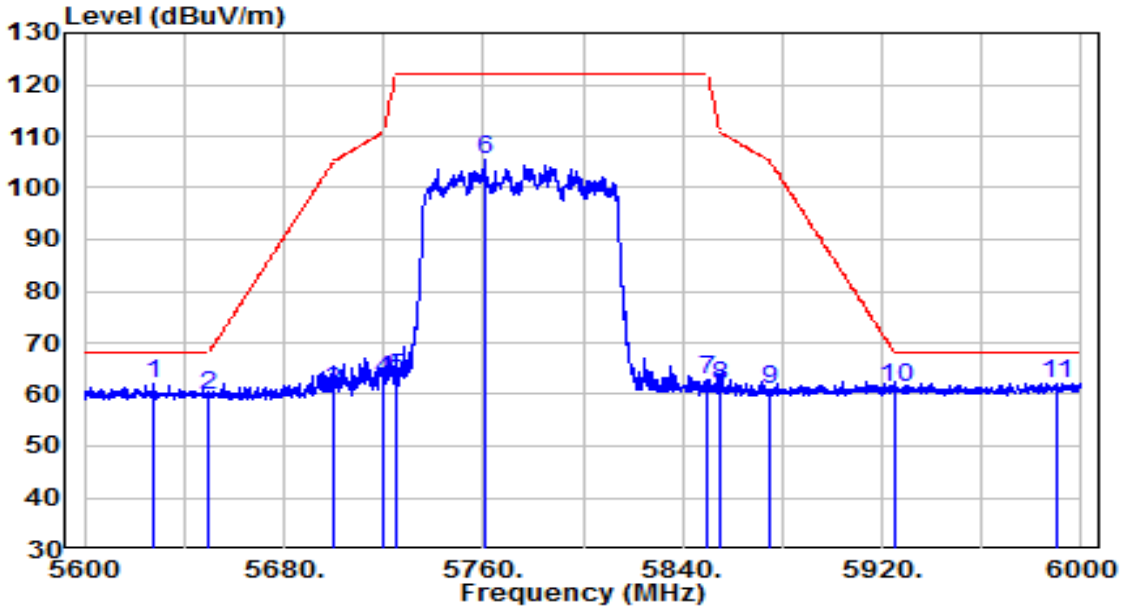

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5628.000	41.21	20.68	61.89	-6.31	68.20	Peak
2		5650.000	38.99	20.76	59.75	-8.45	68.20	Peak
3		5700.000	39.77	20.92	60.69	-44.51	105.20	Peak
4		5720.000	42.03	20.98	63.01	-47.79	110.80	Peak
5		5725.000	42.31	21.00	63.31	-58.89	122.20	Peak
6		5760.800	84.25	21.11	105.36	N/A	N/A	Peak
7		5850.000	41.47	21.40	62.88	-59.32	122.20	Peak
8		5855.000	40.36	21.42	61.78	-49.02	110.80	Peak
9		5875.000	39.40	21.49	60.88	-44.32	105.20	Peak
10		5925.000	39.65	21.65	61.29	-6.91	68.20	Peak
11	*	5989.800	40.39	21.86	62.25	-5.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.


2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

Type B Filter Configuration

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

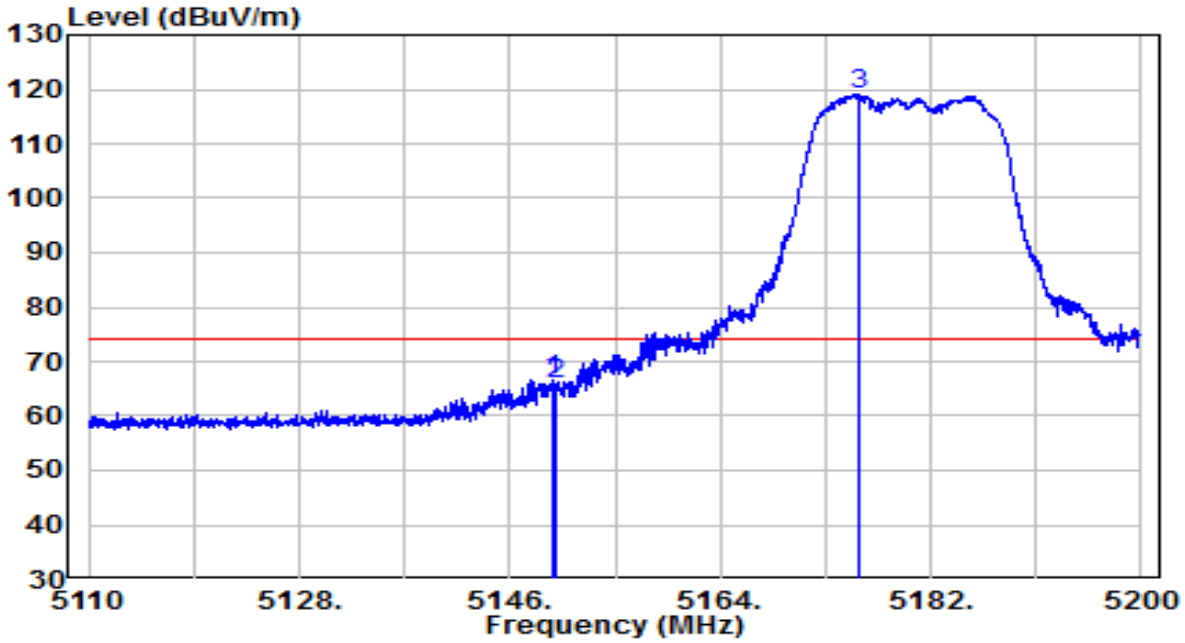


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5149.645	46.87	19.91	66.77	-7.23	74.00	Peak
2		5150.000	46.05	19.91	65.96	-8.04	74.00	Peak
3		5175.835	99.10	19.93	119.03	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

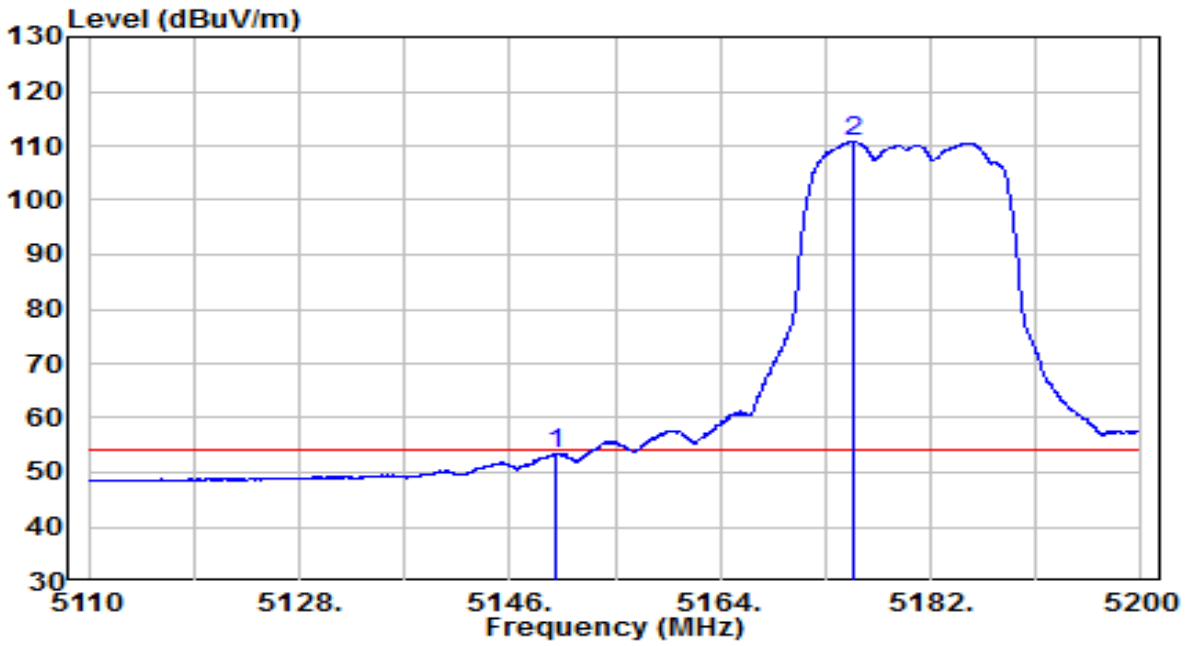


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	33.56	19.91	53.47	-0.53	54.00	Average
2		5175.430	90.96	19.93	110.89	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

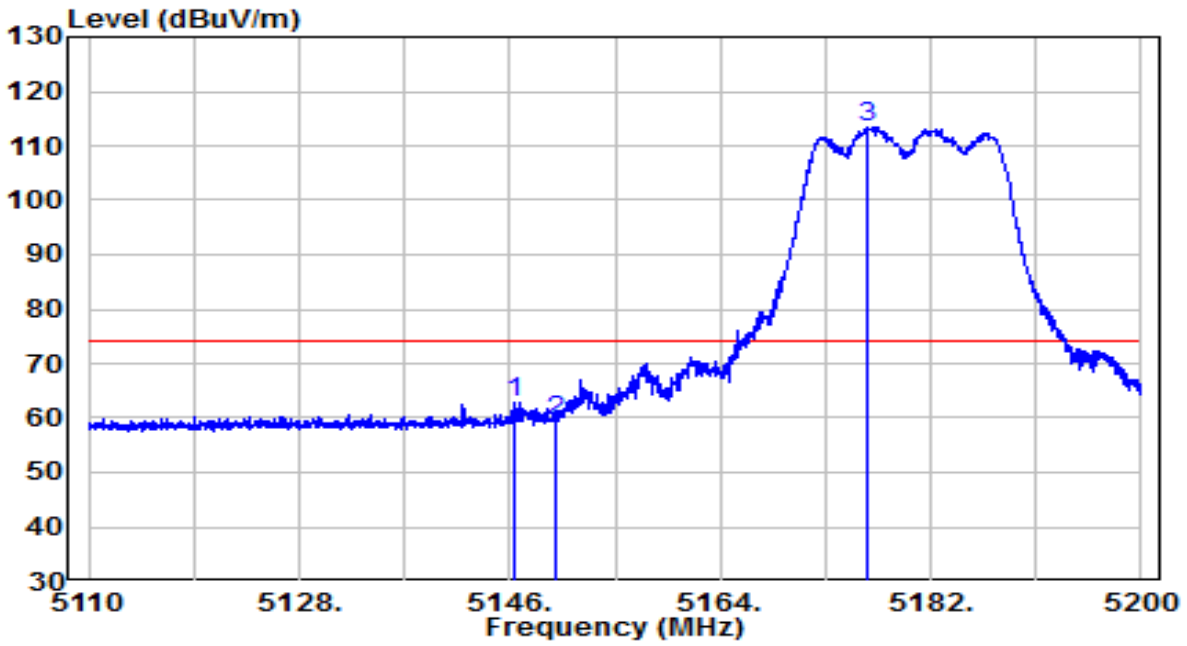


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5146.360	43.06	19.90	62.96	-11.04	74.00	Peak
2		5150.000	39.68	19.91	59.59	-14.41	74.00	Peak
3		5176.555	93.57	19.93	113.51	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

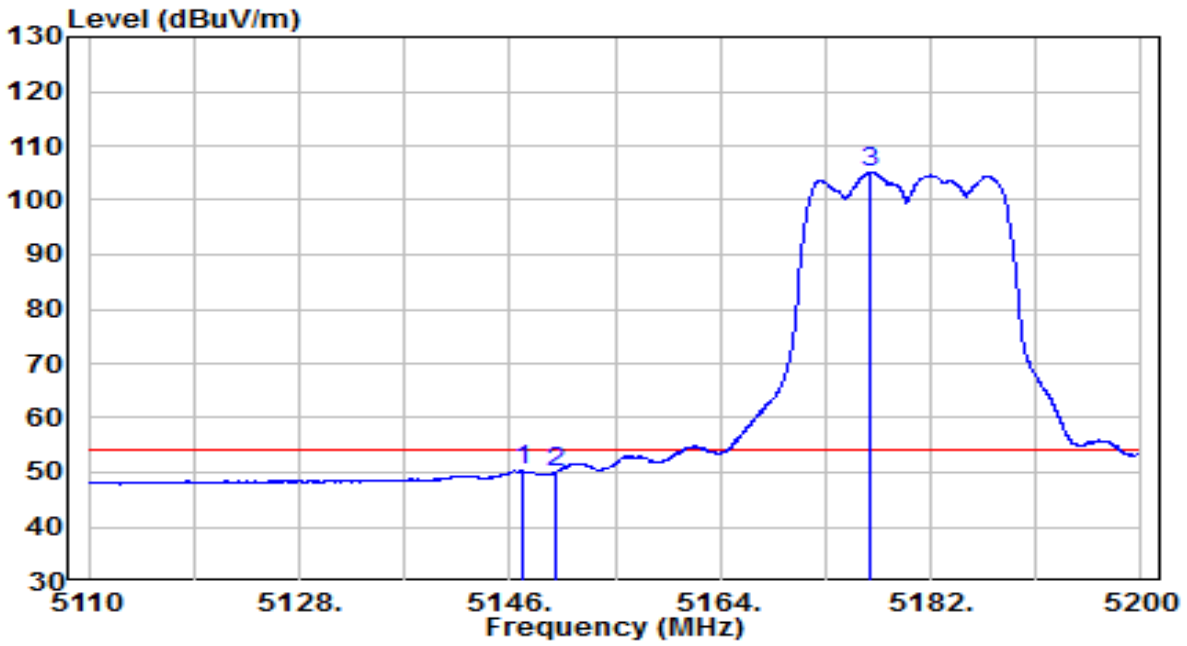


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5147.125	30.44	19.90	50.34	-3.66	54.00	Average
2		5150.000	30.13	19.91	50.04	-3.96	54.00	Average
3		5176.780	85.14	19.93	105.07	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	110V/60Hz

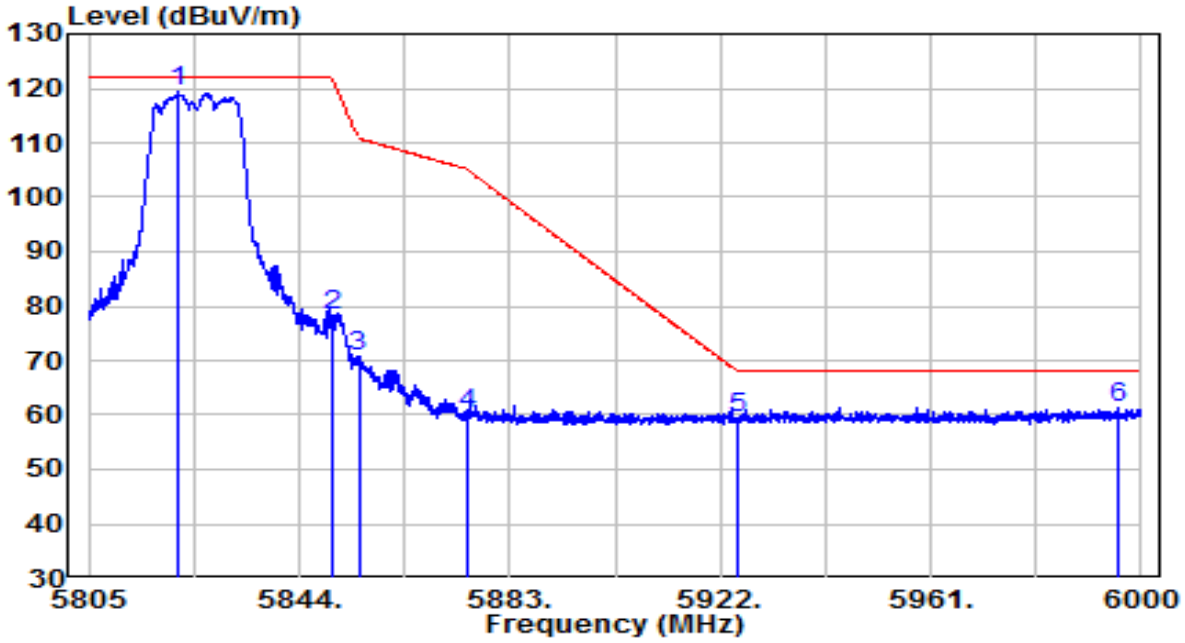


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5821.672	98.04	21.31	119.36	N/A	N/A	Peak
2		5850.000	57.06	21.40	78.46	-43.74	122.20	Peak
3		5855.000	49.18	21.42	70.60	-40.20	110.80	Peak
4		5875.000	38.71	21.49	60.20	-45.00	105.20	Peak
5		5925.000	37.81	21.65	59.46	-8.74	68.20	Peak
6	*	5995.515	39.54	21.88	61.41	-6.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	110V/60Hz

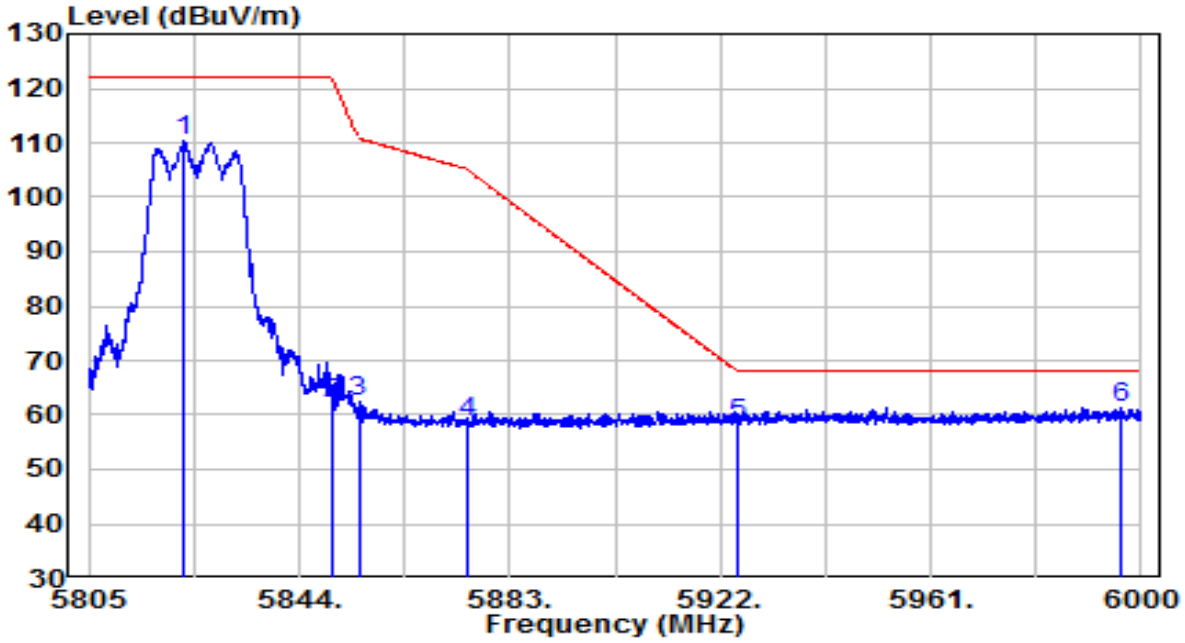


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5822.550	89.07	21.32	110.39	N/A	N/A	Peak
2		5850.000	40.84	21.40	62.24	-59.96	122.20	Peak
3		5855.000	40.93	21.42	62.35	-48.45	110.80	Peak
4		5875.000	37.37	21.49	58.85	-46.35	105.20	Peak
5		5925.000	36.62	21.65	58.27	-9.93	68.20	Peak
6	*	5996.393	39.42	21.88	61.30	-6.90	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	110V/60Hz

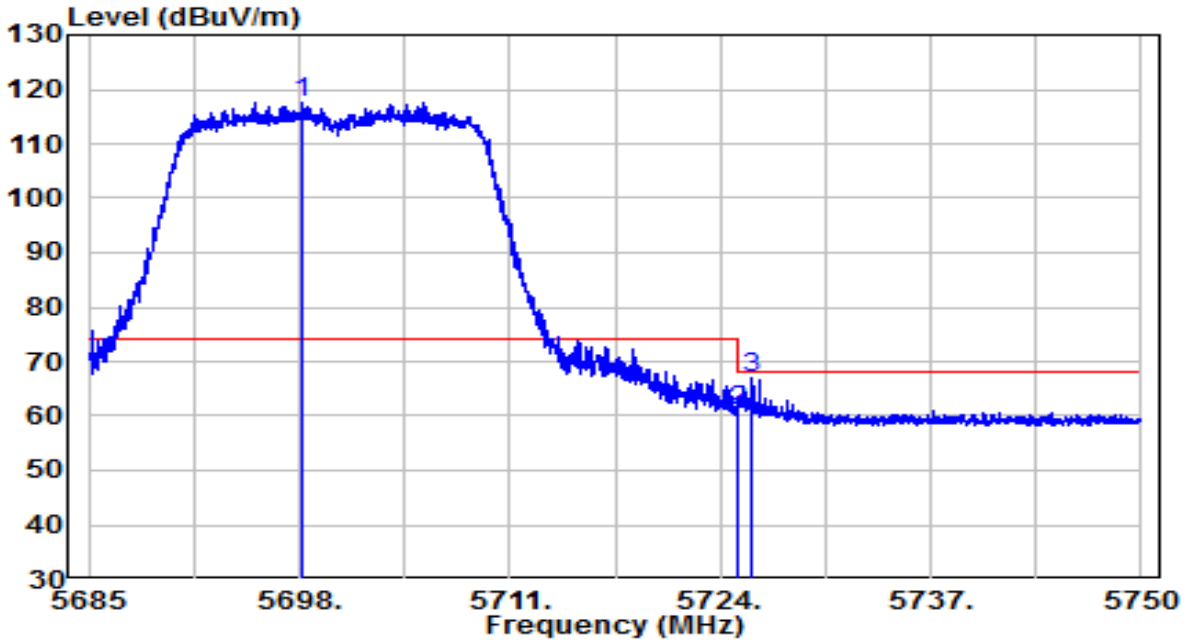


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5698.163	96.77	20.91	117.68	N/A	N/A	Peak
2		5725.000	39.81	21.00	60.81	-7.39	68.20	Peak
3	*	5725.982	46.10	21.00	67.10	-1.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	110V/60Hz

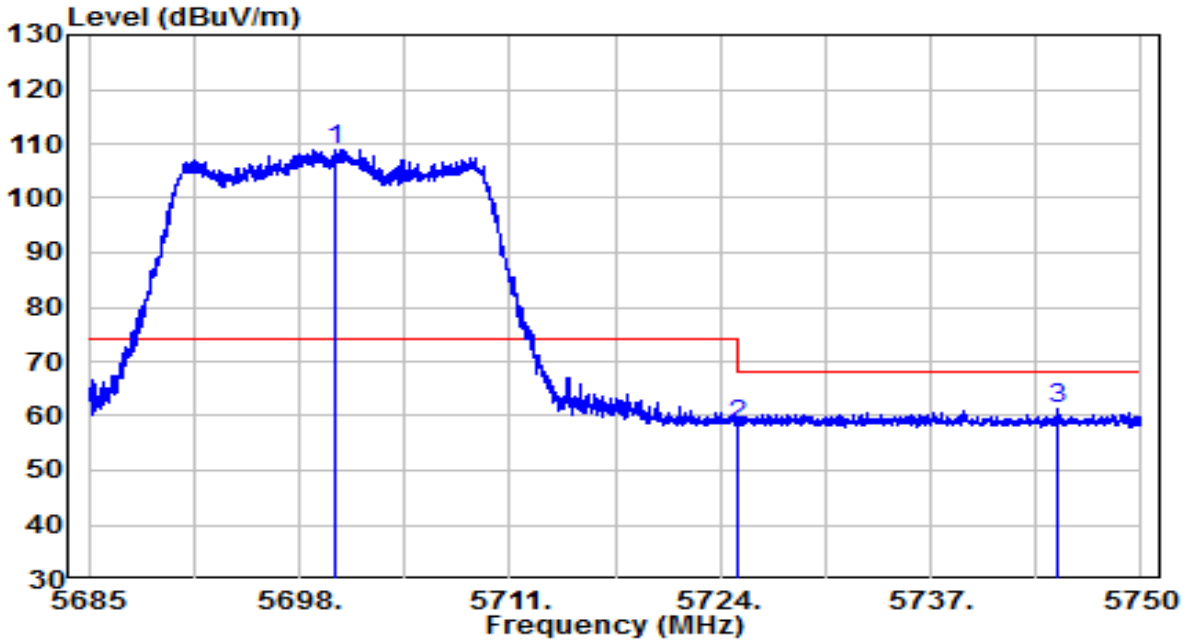


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5700.145	88.12	20.92	109.04	N/A	N/A	Peak
2		5725.000	37.37	21.00	58.37	-9.83	68.20	Peak
3	*	5744.897	40.14	21.06	61.20	-7.00	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

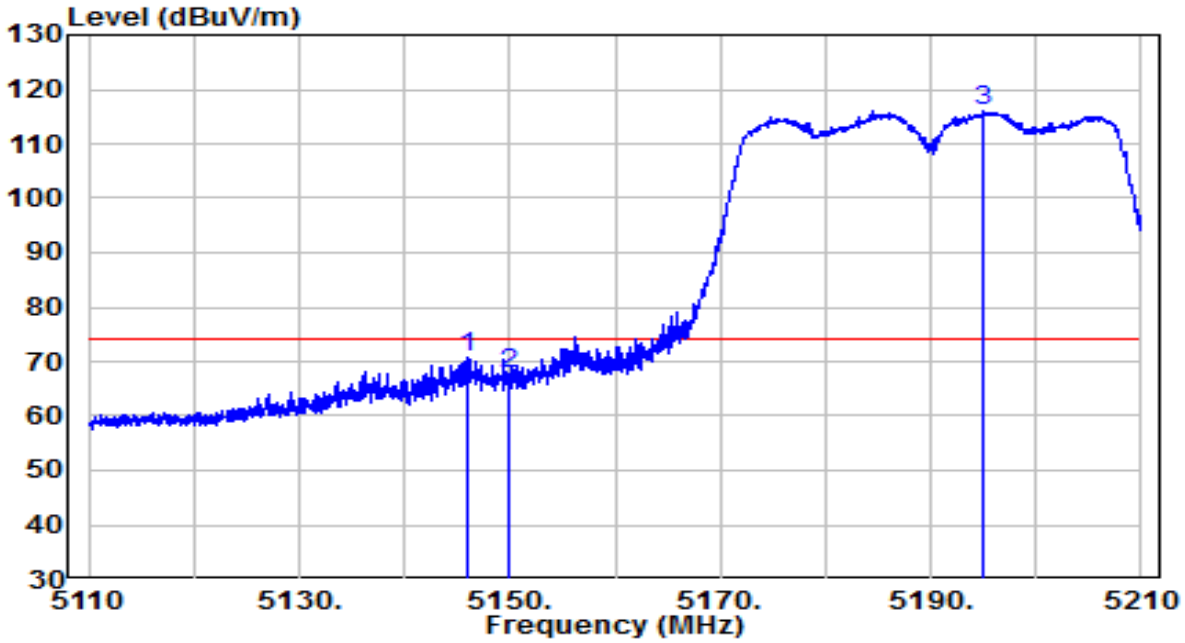


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5145.950	50.98	19.90	70.88	-3.12	74.00	Peak
2		5150.000	47.72	19.91	67.63	-6.37	74.00	Peak
3		5194.950	96.21	19.95	116.16	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

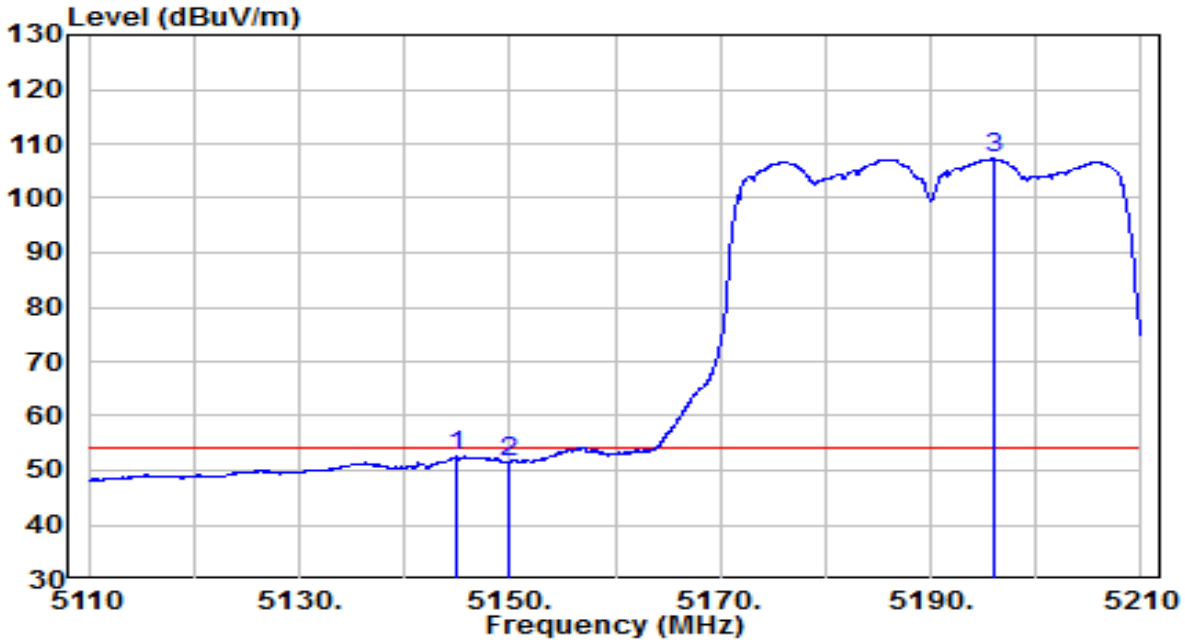


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5145.000	32.63	19.90	52.53	-1.47	54.00	Average
2		5150.000	31.68	19.91	51.59	-2.41	54.00	Average
3		5195.950	87.34	19.95	107.29	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

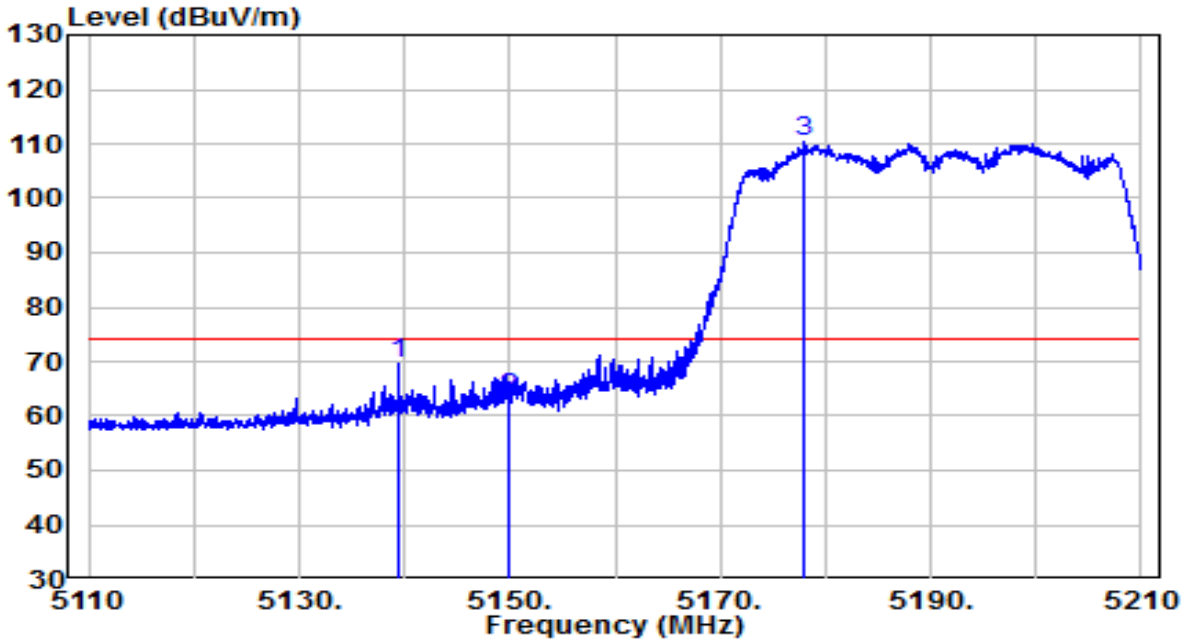


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5139.500	49.61	19.90	69.51	-4.49	74.00	Peak
2		5150.000	43.39	19.91	63.30	-10.70	74.00	Peak
3		5177.950	90.42	19.94	110.35	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

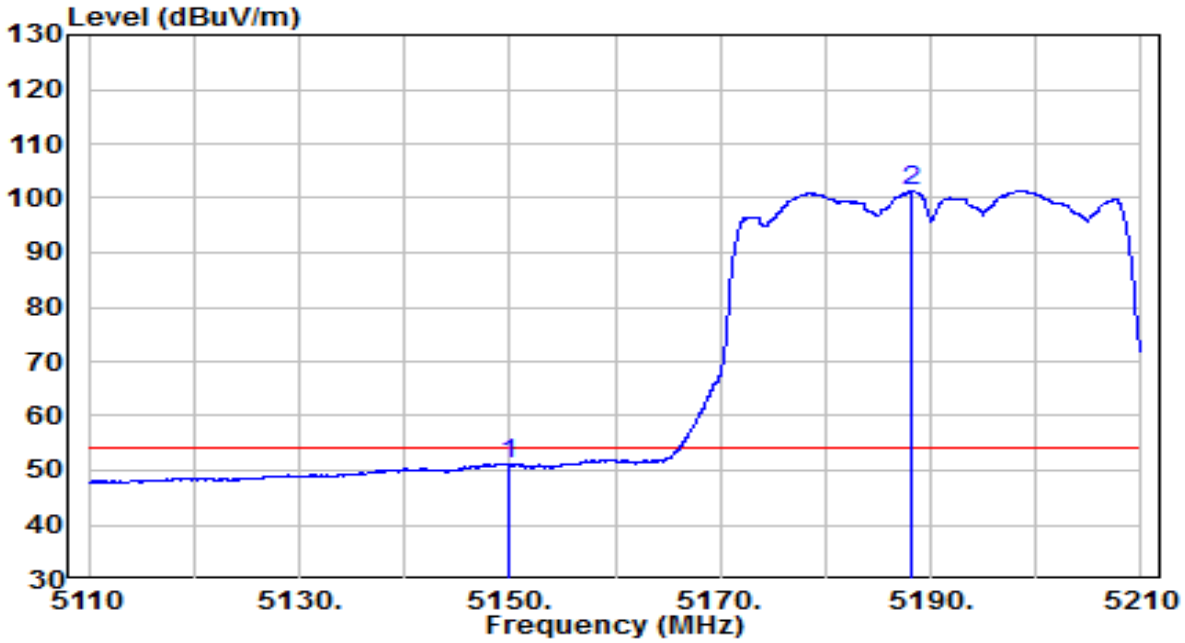


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5150.000	31.33	19.91	51.24	-2.76	54.00	Average
2		5188.050	81.37	19.95	101.31	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	110V/60Hz

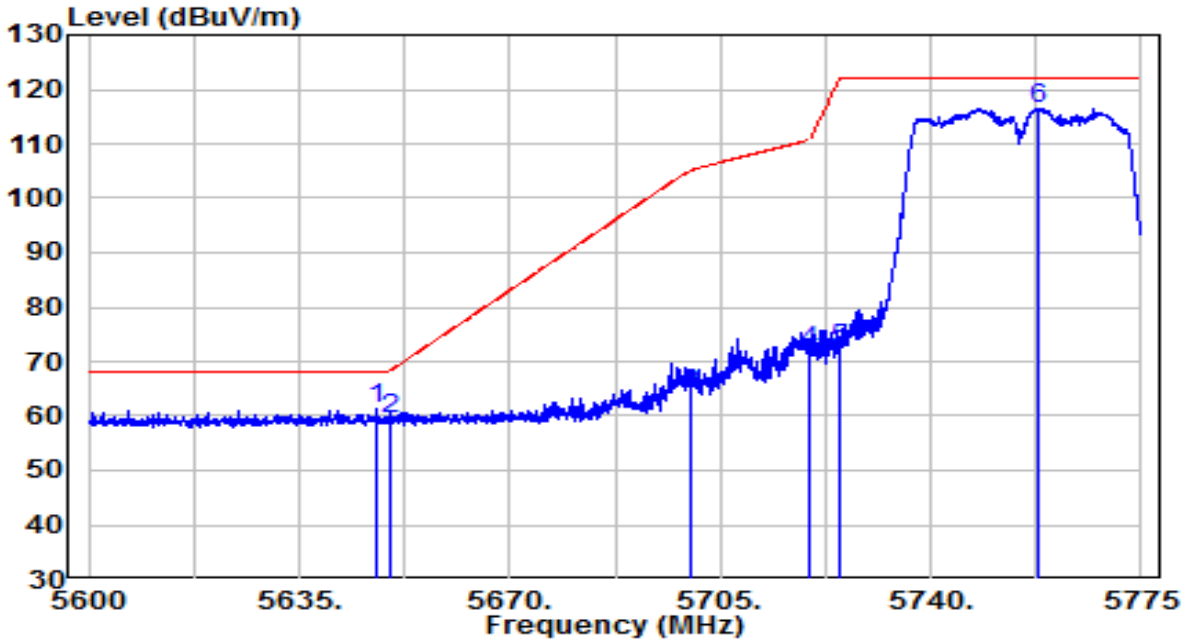


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5647.862	40.62	20.75	61.37	-6.83	68.20	Peak
2		5650.000	38.55	20.76	59.31	-8.89	68.20	Peak
3		5700.000	43.15	20.92	64.07	-41.13	105.20	Peak
4		5720.000	51.00	20.98	71.98	-38.82	110.80	Peak
5		5725.000	51.32	21.00	72.32	-49.88	122.20	Peak
6		5757.763	95.30	21.11	116.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	110V/60Hz

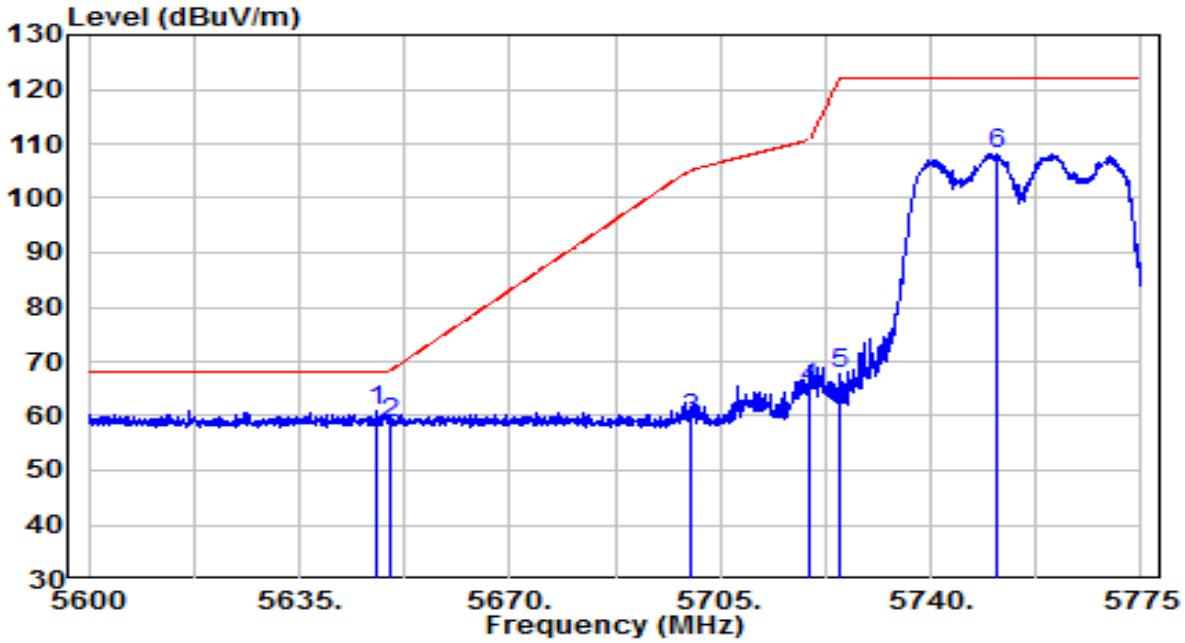


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5647.775	40.21	20.75	60.96	-7.24	68.20	Peak
2		5650.000	37.89	20.76	58.65	-9.55	68.20	Peak
3		5700.000	38.49	20.92	59.41	-45.79	105.20	Peak
4		5720.000	44.28	20.98	65.26	-45.54	110.80	Peak
5		5725.000	46.79	21.00	67.79	-54.41	122.20	Peak
6		5751.200	87.19	21.08	108.28	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	110V/60Hz

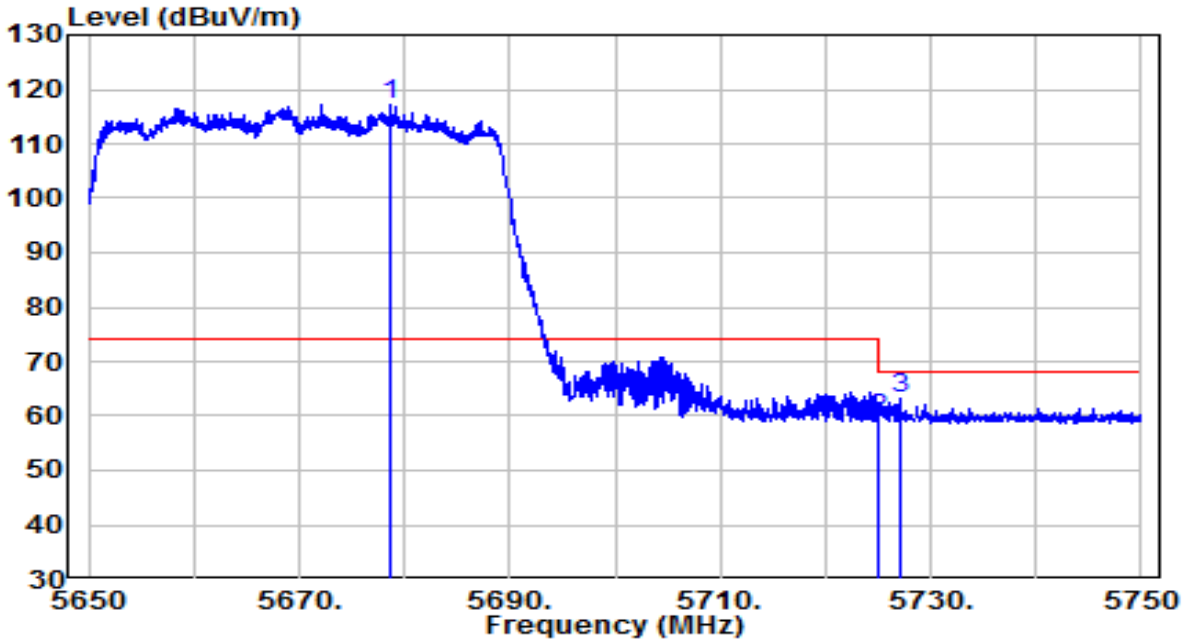


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5678.600	96.43	20.85	117.28	N/A	N/A	Peak
2		5725.000	38.48	21.00	59.47	-8.73	68.20	Peak
3	*	5727.100	42.13	21.01	63.14	-5.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	110V/60Hz

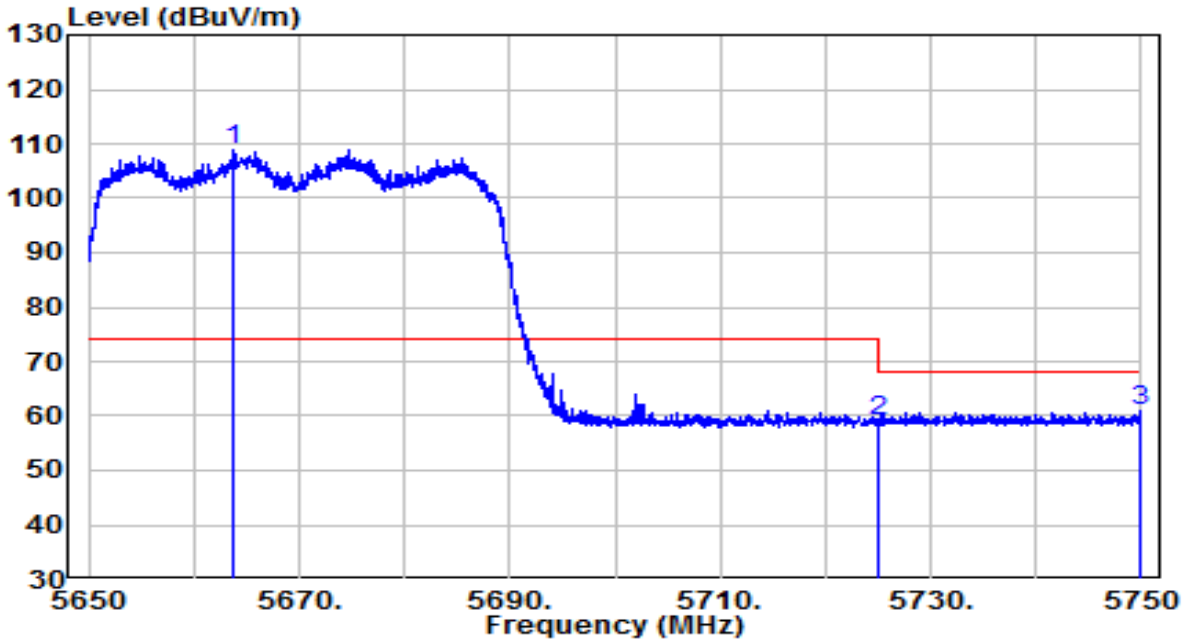


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5663.750	87.96	20.80	108.76	N/A	N/A	Peak
2		5725.000	37.88	21.00	58.87	-9.33	68.20	Peak
3	*	5749.950	39.71	21.08	60.79	-7.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

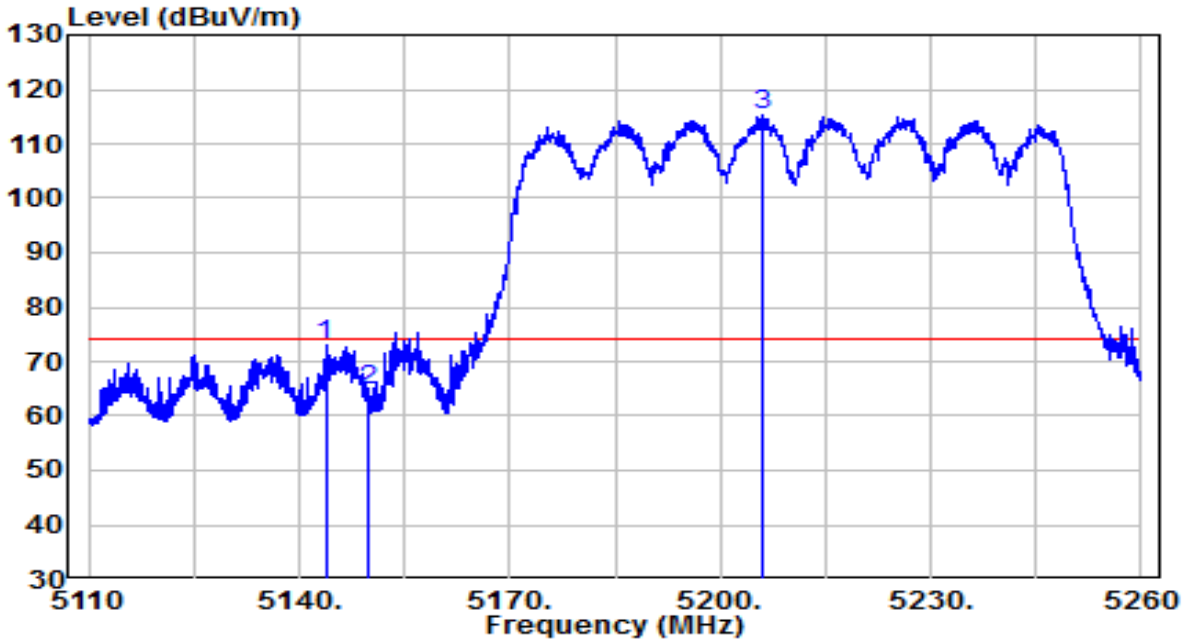


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5143.750	53.25	19.90	73.15	-0.85	74.00	Peak
2		5150.000	44.83	19.91	64.73	-9.27	74.00	Peak
3		5205.850	95.13	19.96	115.10	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

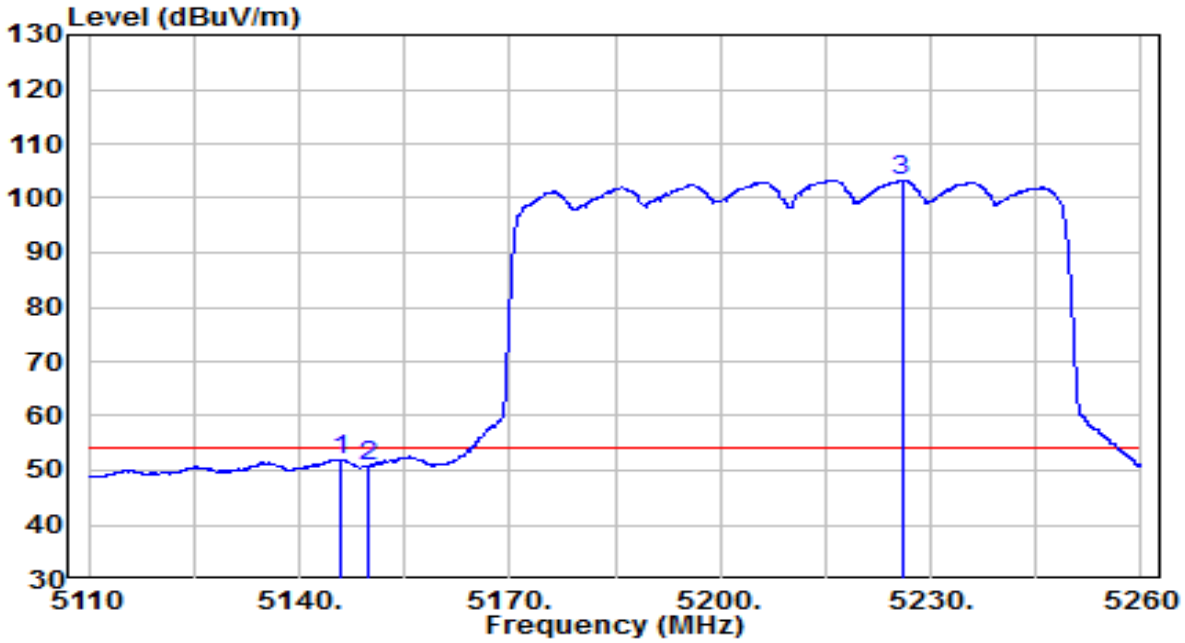


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5145.850	32.15	19.90	52.06	-1.94	54.00	Average
2		5150.000	30.93	19.91	50.84	-3.16	54.00	Average
3		5225.875	83.35	19.98	103.33	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

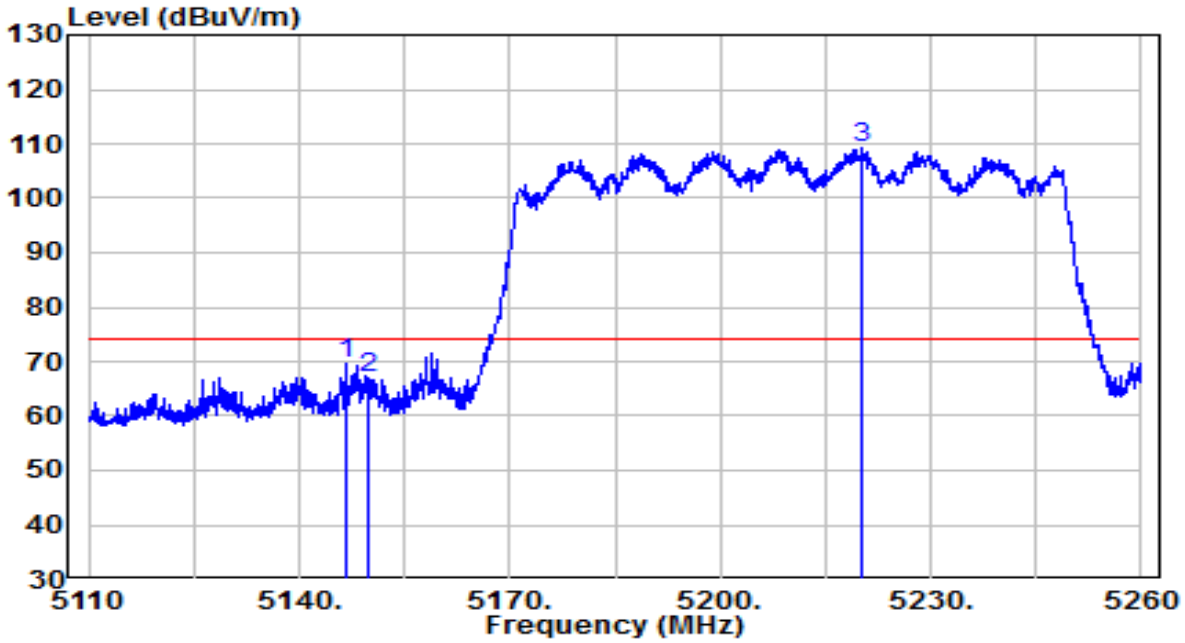


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5146.750	49.85	19.90	69.76	-4.24	74.00	Peak
2		5150.000	46.98	19.91	66.88	-7.12	74.00	Peak
3		5220.250	89.13	19.98	109.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	110V/60Hz

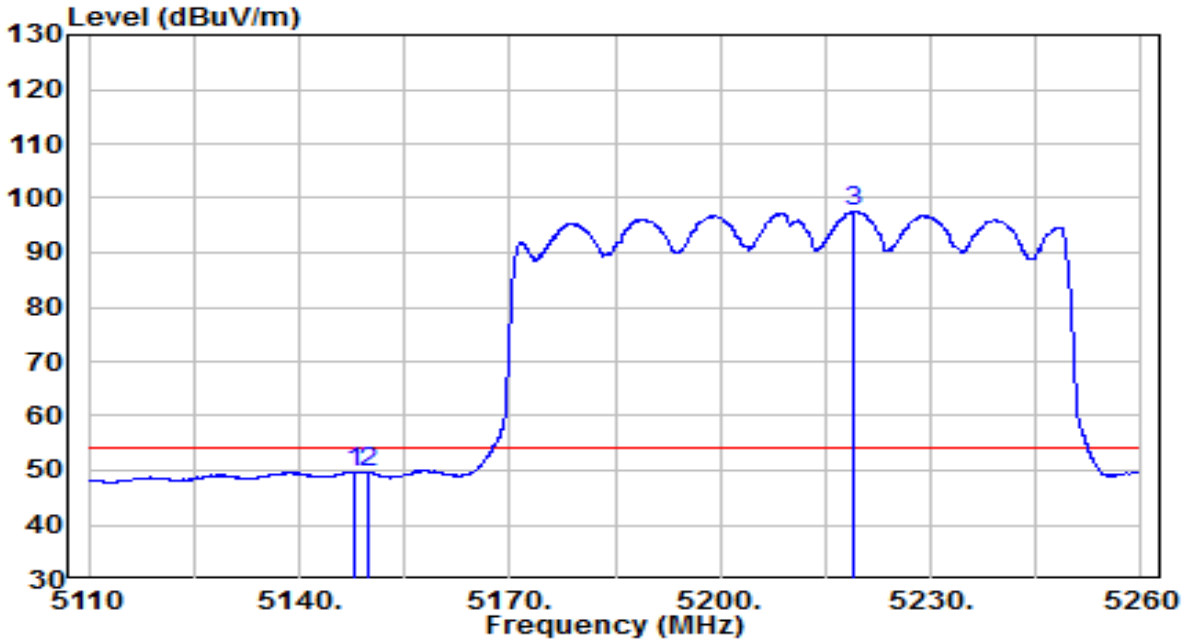


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5148.025	29.85	19.90	49.76	-4.24	54.00	Average
2		5150.000	29.65	19.91	49.56	-4.44	54.00	Average
3		5219.125	77.59	19.98	97.57	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	110V/60Hz

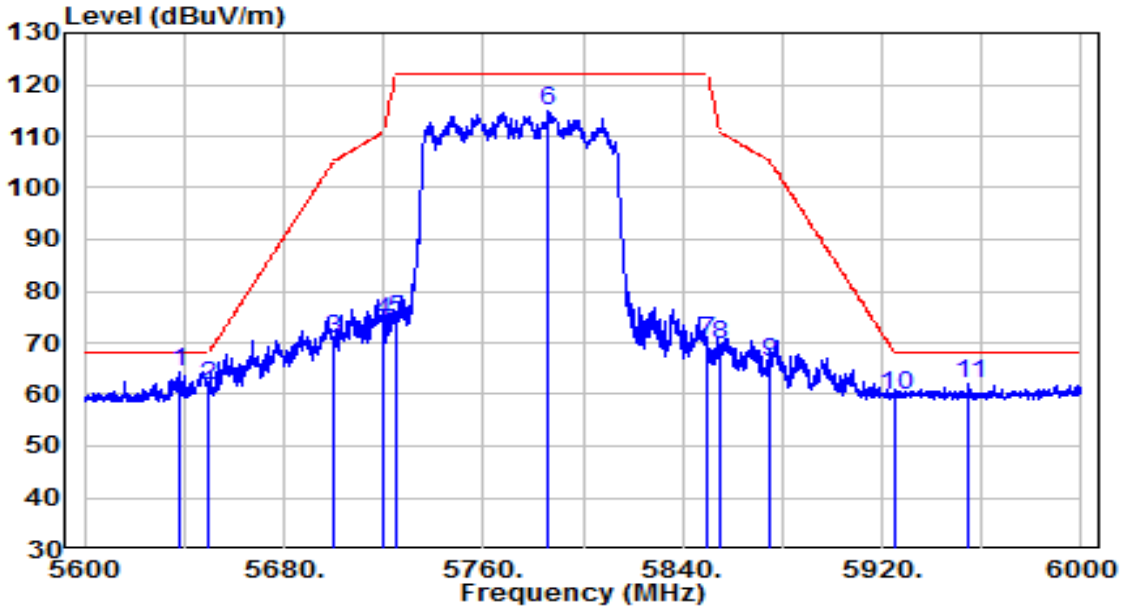

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5637.800	43.46	20.72	64.18	-4.02	68.20	Peak
2		5650.000	40.78	20.76	61.54	-6.66	68.20	Peak
3		5700.000	49.94	20.92	70.86	-34.34	105.20	Peak
4		5720.000	53.05	20.98	74.03	-36.77	110.80	Peak
5		5725.000	53.54	21.00	74.53	-47.67	122.20	Peak
6		5786.000	93.79	21.20	114.99	N/A	N/A	Peak
7		5850.000	49.10	21.40	70.51	-51.69	122.20	Peak
8		5855.000	48.05	21.42	69.47	-41.33	110.80	Peak
9		5875.000	44.91	21.49	66.39	-38.81	105.20	Peak
10		5925.000	38.32	21.65	59.97	-8.23	68.20	Peak
11		5955.000	40.17	21.74	61.92	-6.28	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	110V/60Hz

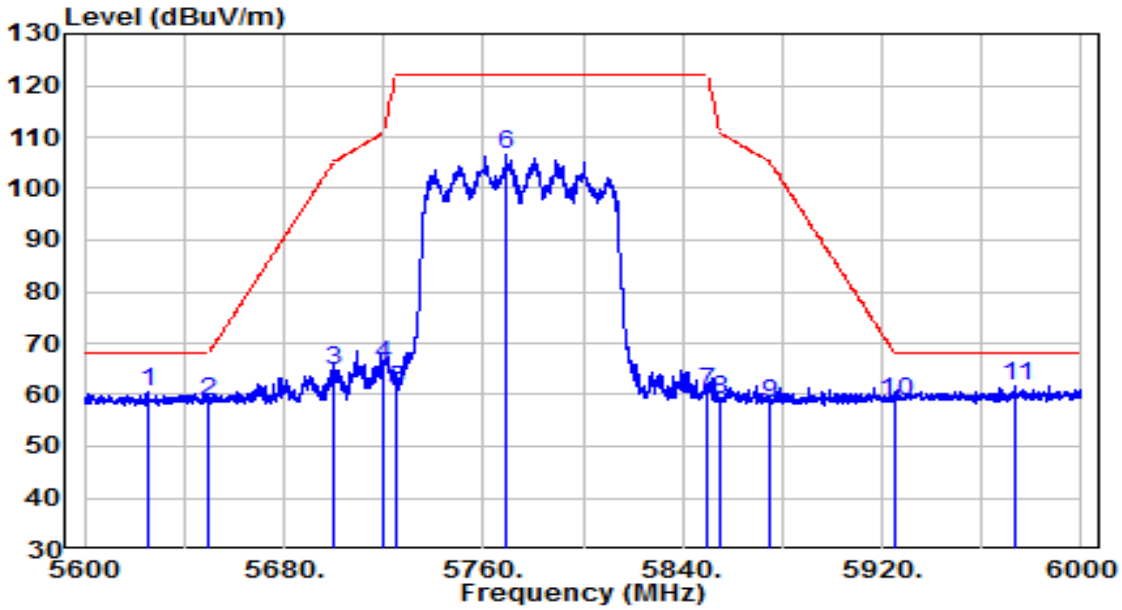

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		5625.200	39.93	20.68	60.60	-7.60	68.20	Peak
2		5650.000	37.91	20.76	58.67	-9.53	68.20	Peak
3		5700.000	43.71	20.92	64.63	-40.57	105.20	Peak
4		5720.000	44.81	20.98	65.79	-45.01	110.80	Peak
5		5725.000	39.87	21.00	60.87	-61.33	122.20	Peak
6		5769.200	85.38	21.14	106.53	N/A	N/A	Peak
7		5850.000	39.13	21.40	60.53	-61.67	122.20	Peak
8		5855.000	37.64	21.42	59.06	-51.74	110.80	Peak
9		5875.000	36.78	21.49	58.27	-46.93	105.20	Peak
10		5925.000	37.07	21.65	58.71	-9.49	68.20	Peak
11	*	5973.600	39.82	21.80	61.63	-6.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

5.6 占用頻寬

5.6.1 量測方法


待測物之天線埠經由適當之衰減直接連至頻譜分析儀RF輸入端，頻譜分析儀之設定,參考如下:

(1) Set RBW = 100 kHz
(2) VBW ≥ 3 × RBW
(3) Detector = Peak
(4) Trace mode = max hold
(5) Sweep = auto couple

5.6.2 限制要求

6dB頻寬至少應有500kHz。

5.6.3 測試架構圖

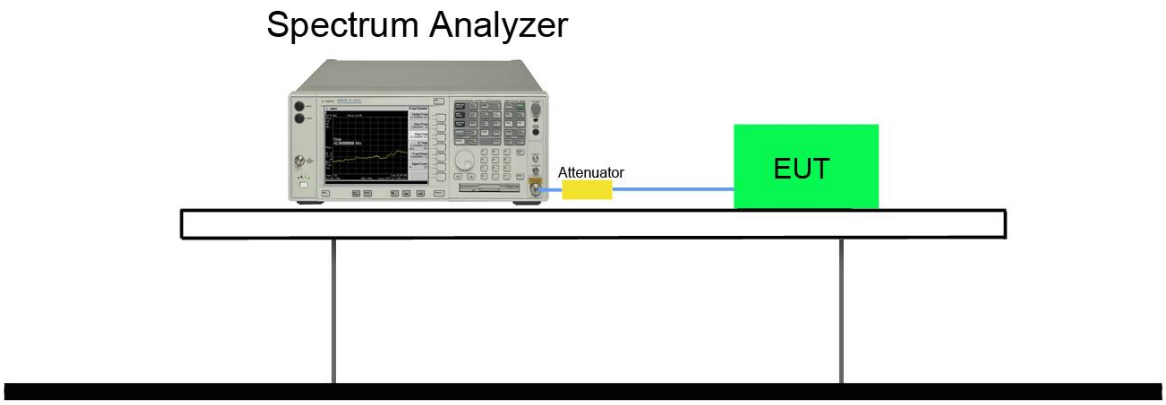

5.6.4 占用頻寬測試結果

待測物名稱	ACCESS POINT	溫度	22 ~ 25°C
測試工程師	Eric Lin	濕度	46 ~ 56%
測試場地	SR1	測試日期	2021/01/19

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11a	6Mbps	36	5180	19.09	16.36
802.11a	6Mbps	44	5220	18.90	16.37
802.11a	6Mbps	48	5240	18.93	16.38
802.11a	6Mbps	52	5260	18.56	16.35
802.11a	6Mbps	60	5300	18.71	16.37
802.11a	6Mbps	64	5320	18.57	16.35
802.11a	6Mbps	100	5500	18.78	16.38
802.11a	6Mbps	116	5580	18.76	16.36
802.11a	6Mbps	140	5700	18.85	16.34
802.11a	6Mbps	144	5720	19.09	16.36
802.11ac-VHT20	MCS0	36	5180	20.52	17.58
802.11ac-VHT20	MCS0	44	5220	20.48	17.61
802.11ac-VHT20	MCS0	48	5240	20.28	17.60
802.11ac-VHT20	MCS0	52	5260	20.05	17.58
802.11ac-VHT20	MCS0	60	5300	20.11	17.59
802.11ac-VHT20	MCS0	64	5320	20.34	17.60
802.11ac-VHT20	MCS0	100	5500	20.11	17.59
802.11ac-VHT20	MCS0	116	5580	20.03	17.58
802.11ac-VHT20	MCS0	140	5700	20.31	17.57
802.11ac-VHT20	MCS0	144	5720	20.42	17.55

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11ac-VHT40	MCS0	38	5190	39.73	36.14
802.11ac-VHT40	MCS0	46	5230	39.55	36.10
802.11ac-VHT40	MCS0	54	5270	40.07	36.13
802.11ac-VHT40	MCS0	62	5310	39.88	36.17
802.11ac-VHT40	MCS0	102	5510	40.25	36.11
802.11ac-VHT40	MCS0	110	5550	39.83	36.14
802.11ac-VHT40	MCS0	134	5670	39.48	36.14
802.11ac-VHT40	MCS0	142	5710	39.99	36.10
802.11ac-VHT80	MCS0	42	5210	81.23	75.37
802.11ac-VHT80	MCS0	58	5290	81.42	75.41
802.11ac-VHT80	MCS0	106	5530	80.98	75.43
802.11ac-VHT80	MCS0	122	5610	81.20	75.41
802.11ac-VHT80	MCS0	138	5690	81.32	75.43
802.11ax-HE20	MCS0	36	5180	20.95	18.90
802.11ax-HE20	MCS0	44	5220	20.76	18.92
802.11ax-HE20	MCS0	48	5240	21.15	18.91
802.11ax-HE20	MCS0	52	5260	20.64	18.93
802.11ax-HE20	MCS0	60	5300	20.82	18.88
802.11ax-HE20	MCS0	64	5320	20.60	18.89
802.11ax-HE20	MCS0	100	5500	20.95	18.92
802.11ax-HE20	MCS0	116	5580	20.81	18.90
802.11ax-HE20	MCS0	140	5700	20.98	18.82
802.11ax-HE20	MCS0	144	5720	20.63	18.93
802.11ax-HE40	MCS0	38	5190	40.66	37.81
802.11ax-HE40	MCS0	46	5230	40.67	37.80
802.11ax-HE40	MCS0	54	5270	40.52	37.78
802.11ax-HE40	MCS0	62	5310	40.98	37.86
802.11ax-HE40	MCS0	102	5510	40.10	37.67
802.11ax-HE40	MCS0	110	5550	40.61	37.77
802.11ax-HE40	MCS0	134	5670	40.75	37.79
802.11ax-HE40	MCS0	142	5710	40.43	37.80


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11ax-HE80	MCS0	42	5210	81.50	77.09
802.11ax-HE80	MCS0	58	5290	81.37	77.17
802.11ax-HE80	MCS0	106	5530	81.52	77.25
802.11ax-HE80	MCS0	122	5610	80.93	77.26
802.11ax-HE80	MCS0	138	5690	82.11	77.14

待測物名稱	ACCESS POINT	溫度	26°C
測試工程師	Eric Lin	濕度	61%
測試場地	SR1	測試日期	2021/03/07


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11a	6Mbps	149	5745	19.82	16.40
802.11a	6Mbps	157	5785	19.66	16.41
802.11a	6Mbps	165	5825	19.91	16.39
802.11ac-VHT20	MCS0	149	5745	20.80	17.59
802.11ac-VHT20	MCS0	157	5785	21.22	17.64
802.11ac-VHT20	MCS0	165	5825	20.99	17.62
802.11ac-VHT40	MCS0	151	5755	39.75	36.12
802.11ac-VHT40	MCS0	159	5795	40.71	36.17
802.11ac-VHT80	MCS0	155	5775	81.34	75.47
802.11ax-HE20	MCS0	149	5745	21.70	18.98
802.11ax-HE20	MCS0	157	5785	21.08	18.93
802.11ax-HE20	MCS0	165	5825	21.47	18.96
802.11ax-HE40	MCS0	151	5755	40.74	37.78
802.11ax-HE40	MCS0	159	5795	40.35	37.82
802.11ax-HE80	MCS0	155	5775	81.48	77.16

802.11a 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

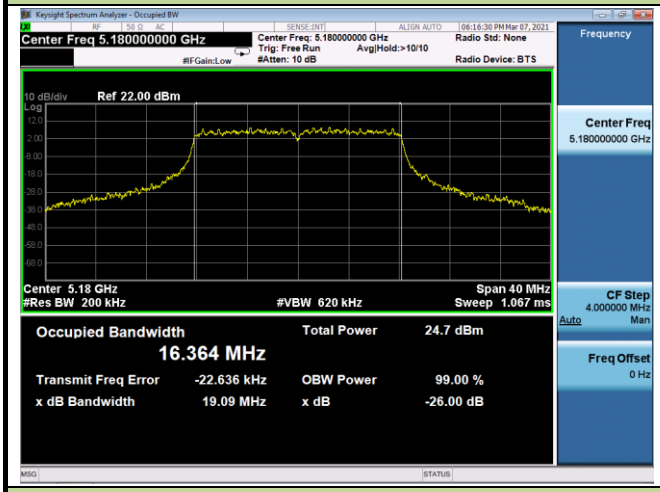


Channel 44 (5220MHz)

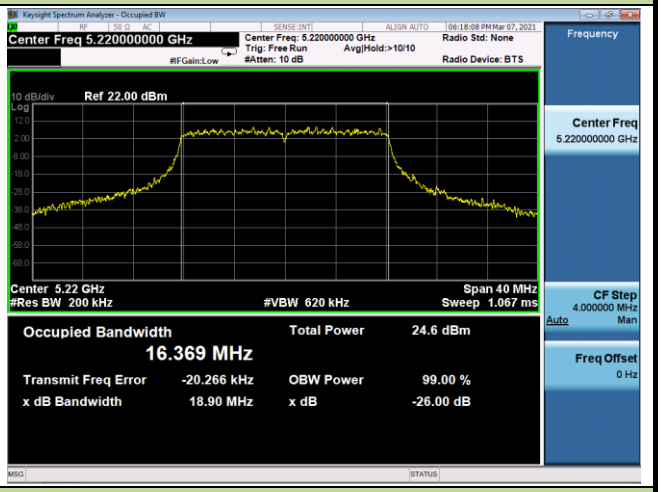


Channel 48 (5240MHz)

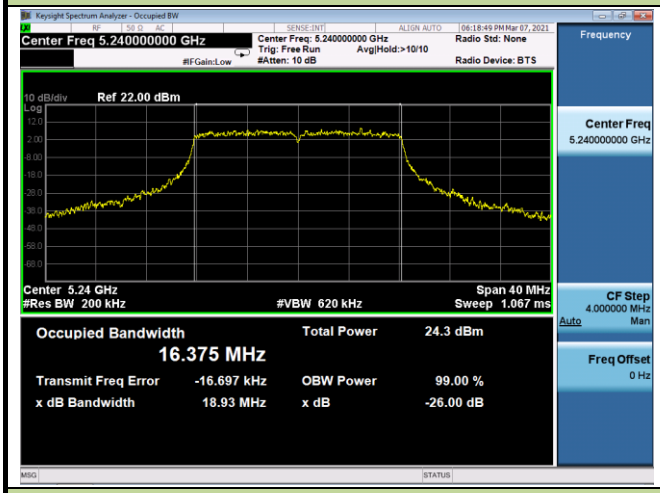


Channel 52 (5260MHz)

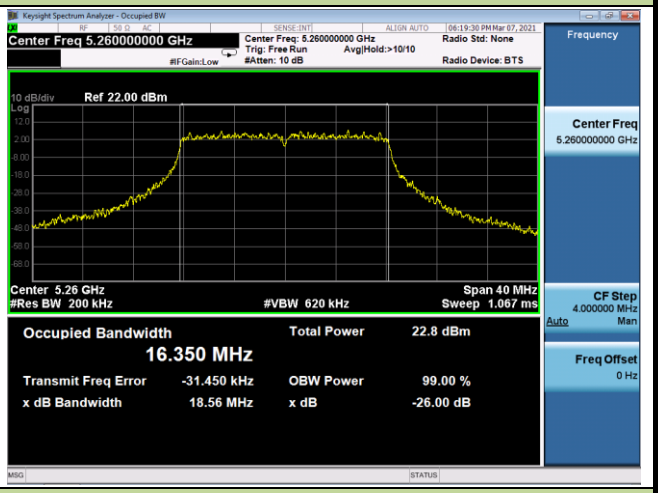

Channel 60 (5300MHz)

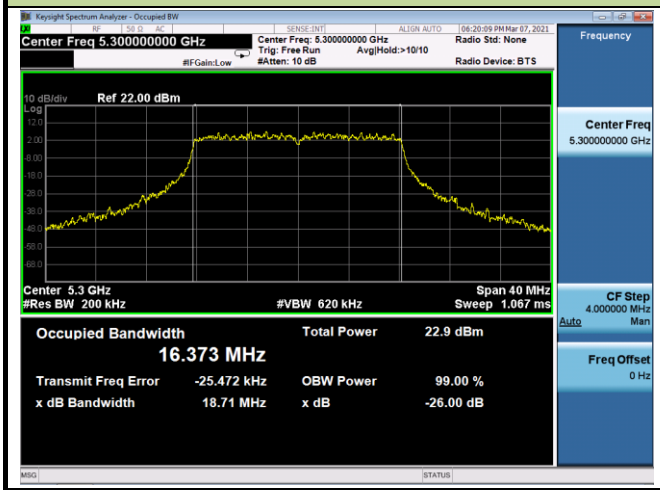


Channel 64 (5320MHz)

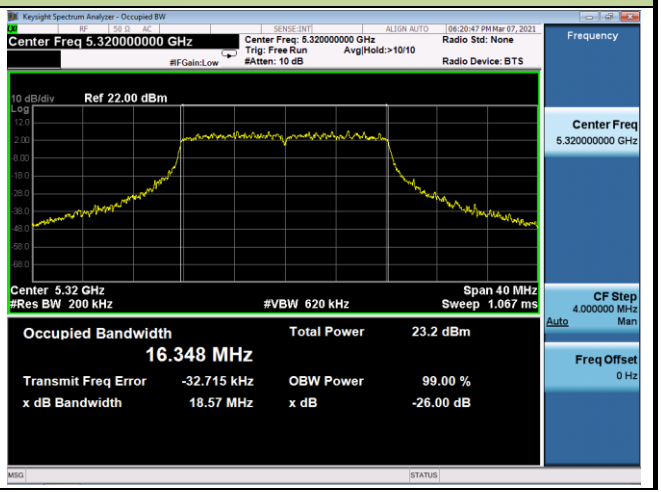


802.11a 26dB Bandwidth & 99% Bandwidth


Channel 100 (5500MHz)

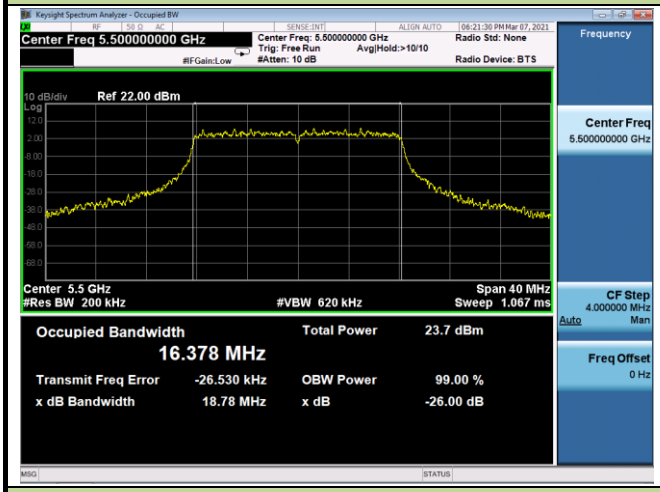


Channel 116 (5580MHz)

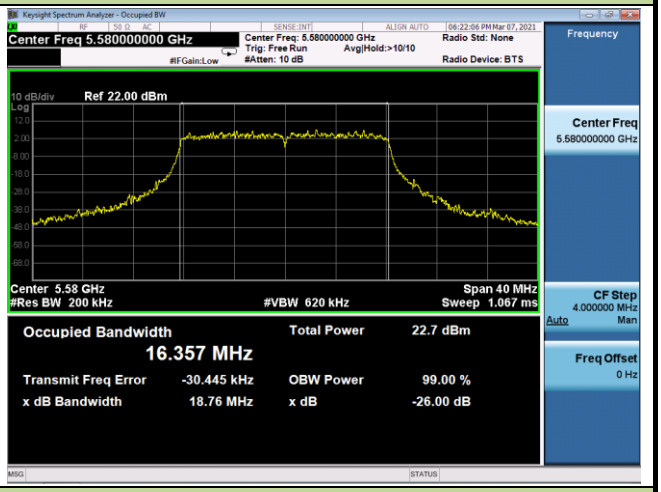


Channel 140 (5700MHz)

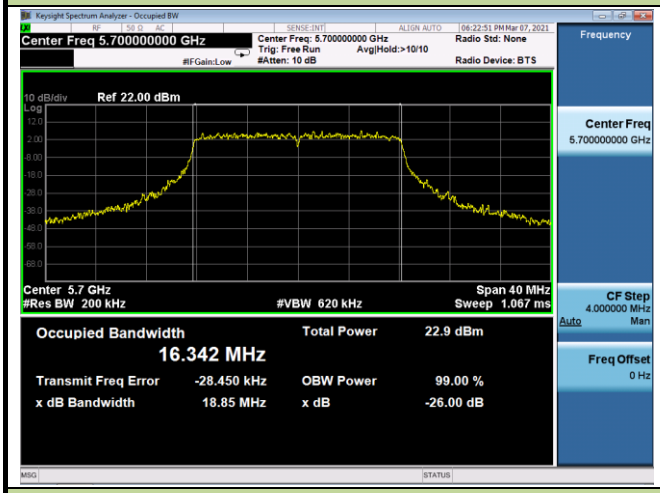


Channel 144 (5720MHz)

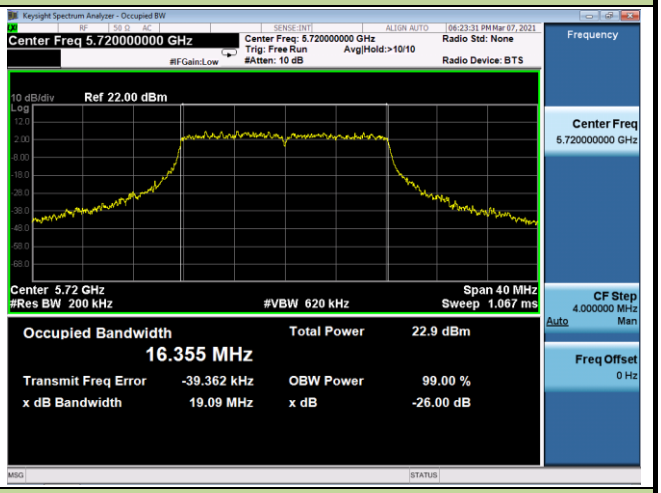


Channel 149 (5745MHz)

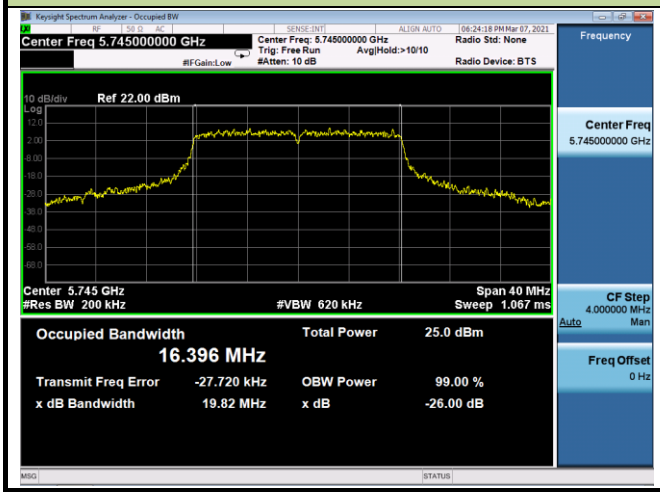


Channel 157 (5785MHz)

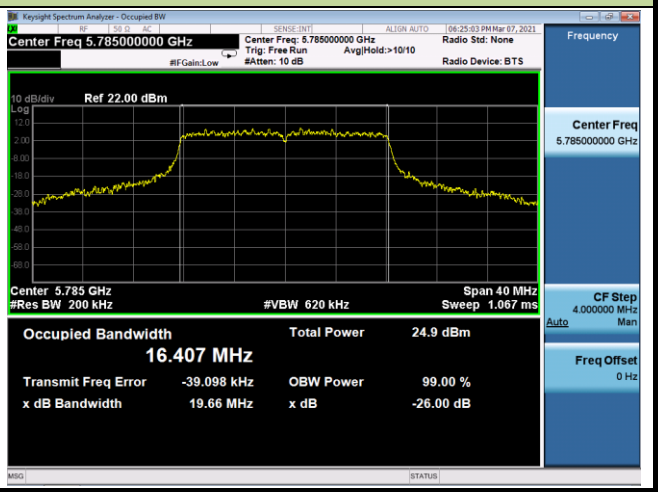

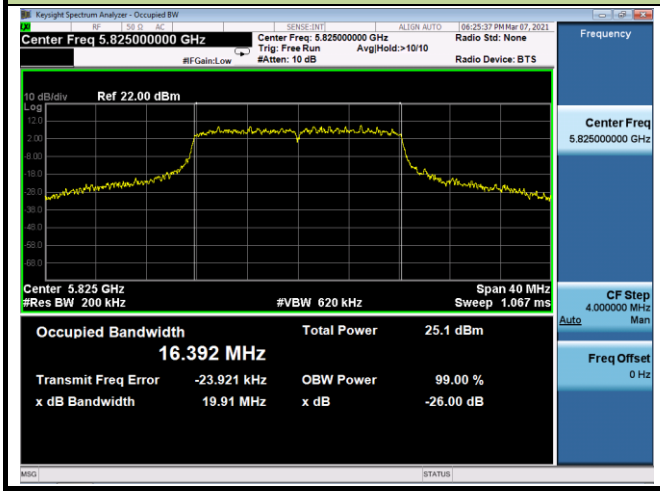
802.11a 26dB Bandwidth & 99% Bandwidth	
Channel 165 (5825MHz)	
	

802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

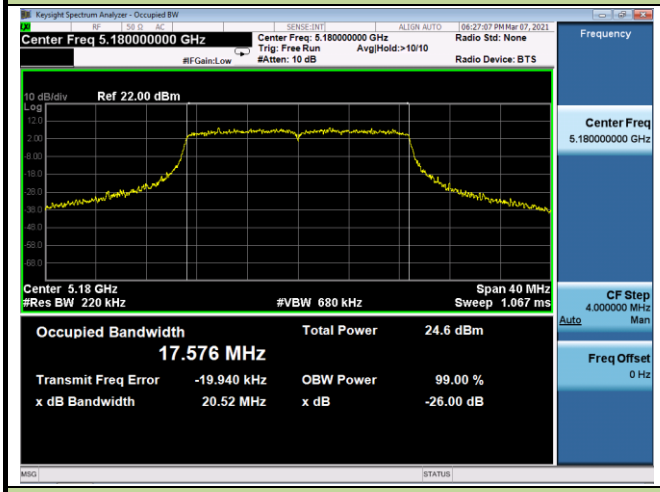

Channel 44 (5220MHz)

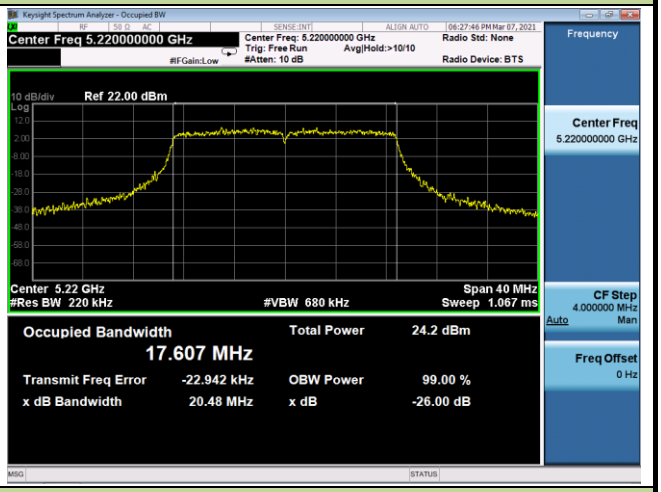


Channel 48 (5240MHz)

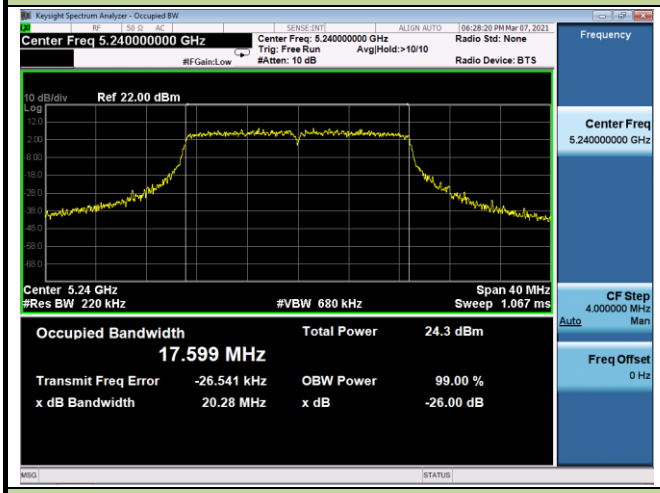


Channel 52 (5260MHz)







Channel 60 (5300MHz)






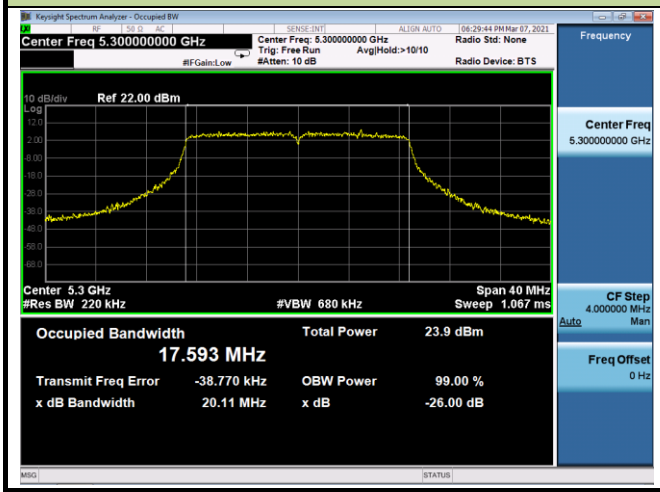






Channel 64 (5320MHz)






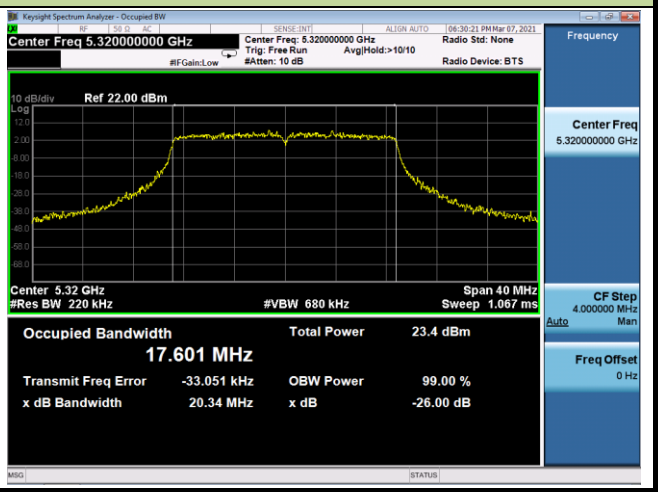



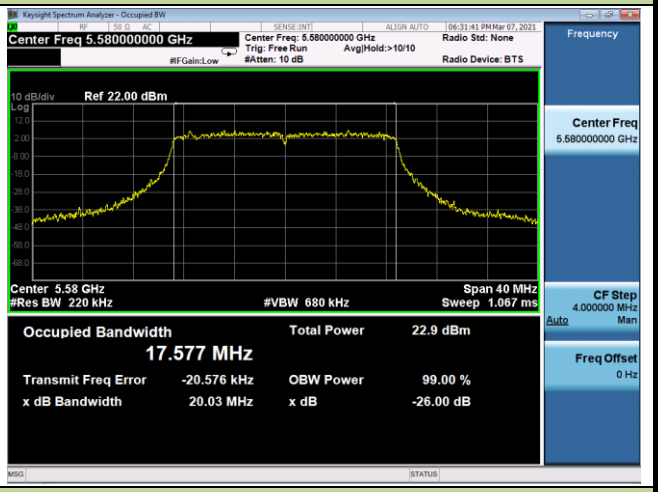
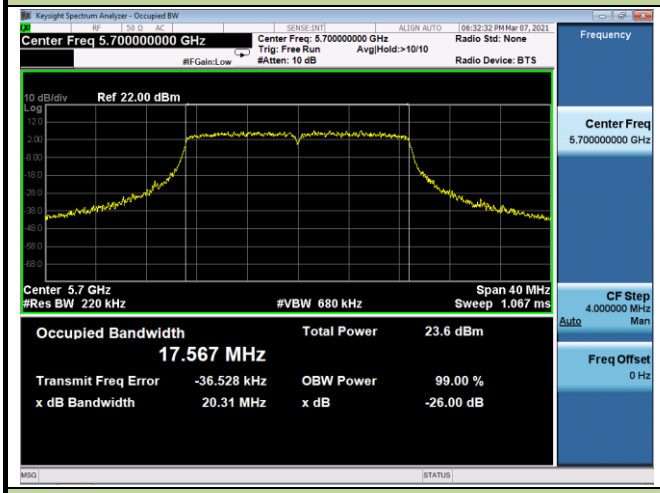
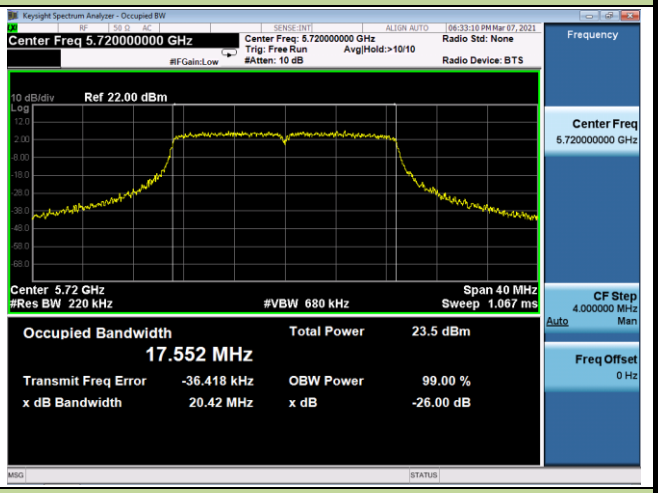
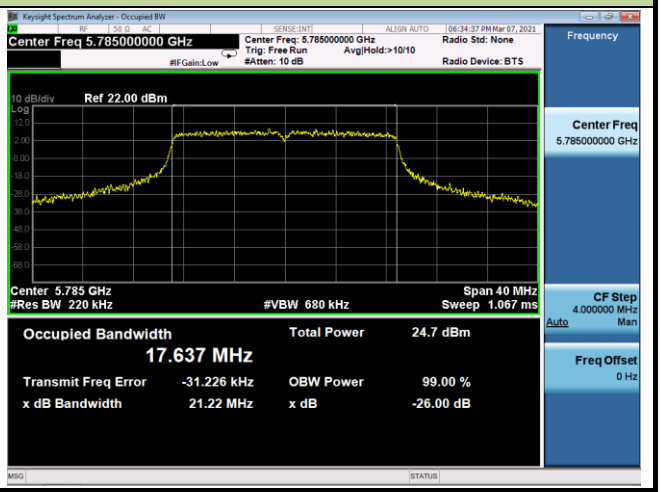
802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth	
Channel 100 (5500MHz)	Channel 116 (5580MHz)
	
Channel 140 (5700MHz)	Channel 144 (5720MHz)
	
Channel 149 (5745MHz)	Channel 157 (5785MHz)
	






802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth	
Channel 165 (5825MHz)	
	

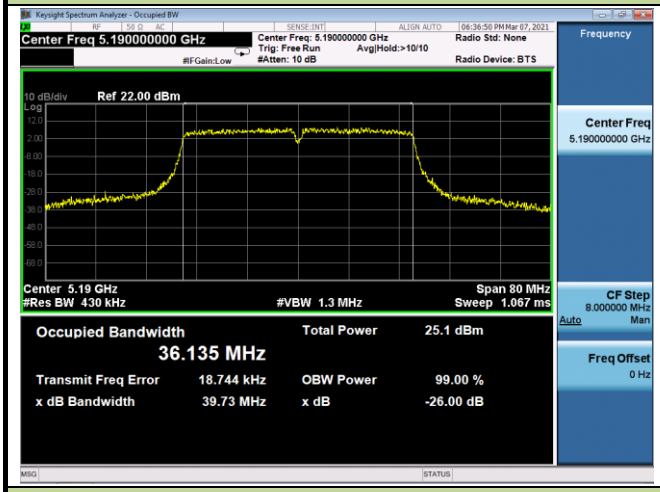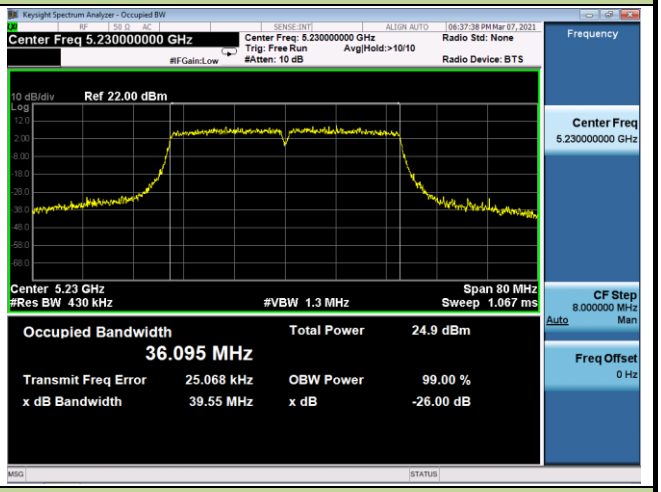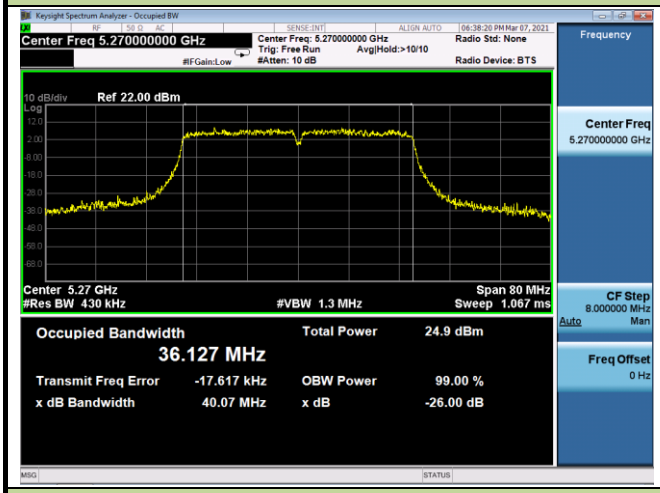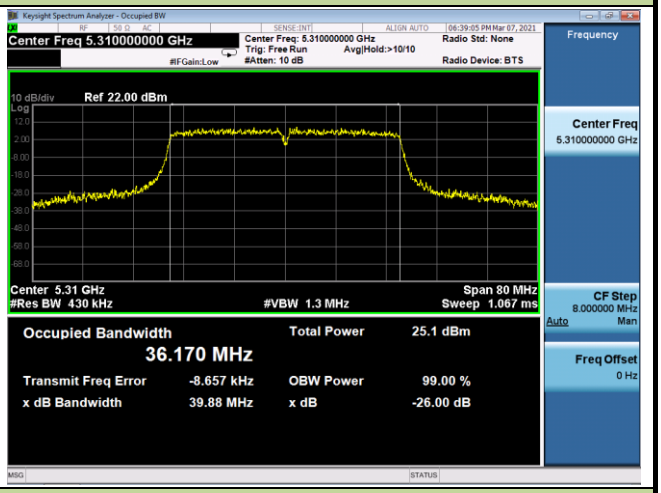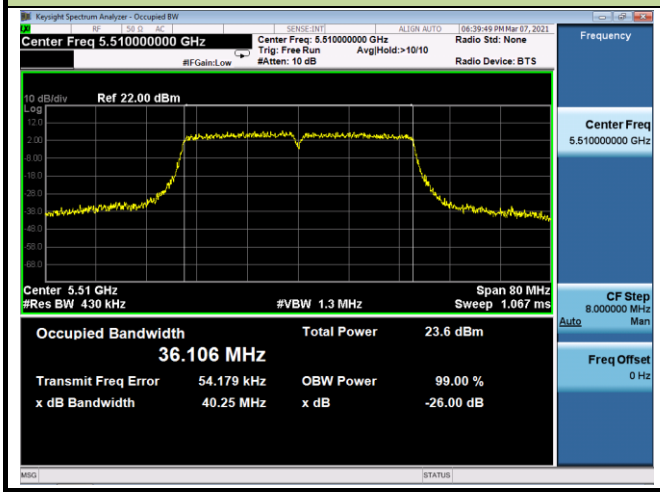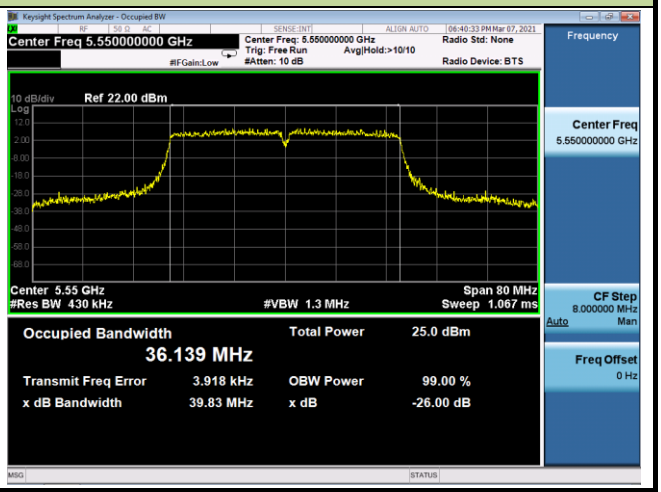802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth	
Channel 38 (5190MHz)	Channel 46 (5230MHz)
	
Channel 54 (5270MHz)	Channel 62 (5310MHz)
	
Channel 102 (5510MHz)	Channel 110 (5550MHz)
	


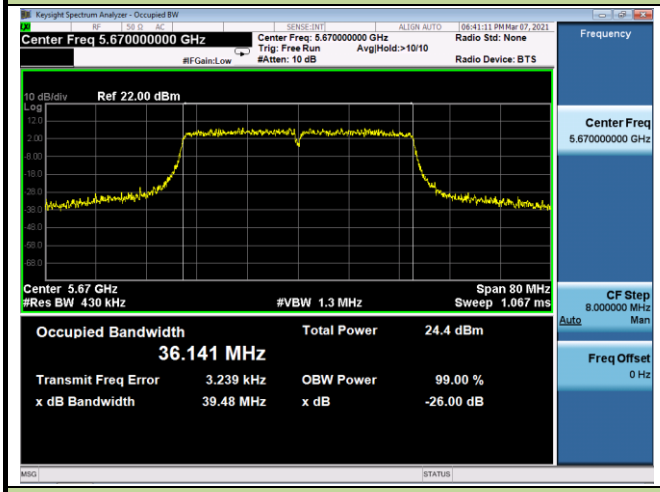
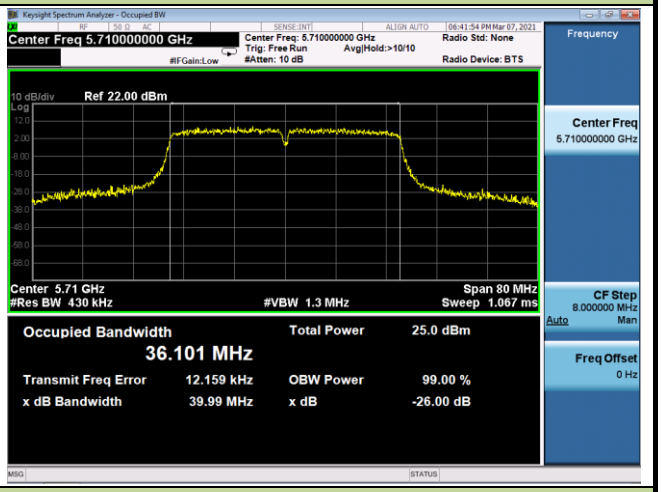
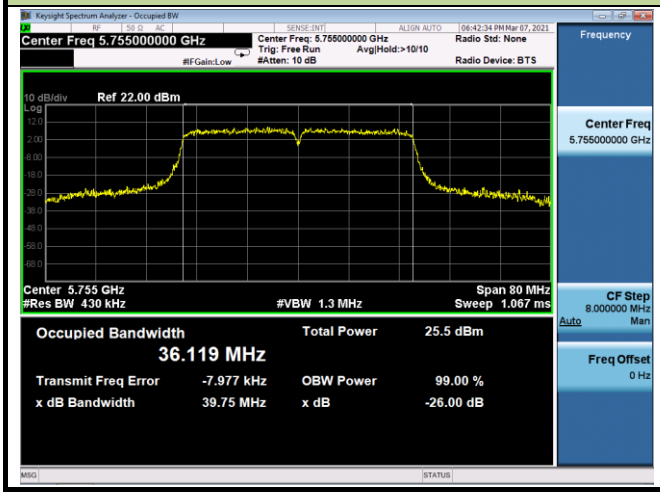
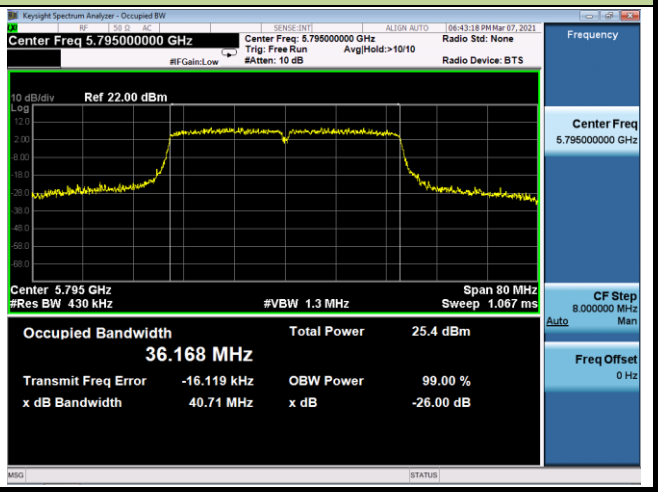
802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth	
Channel 134 (5670MHz)	Channel 142 (5710MHz)
	
Channel 151 (5755MHz)	Channel 159 (5795MHz)
	

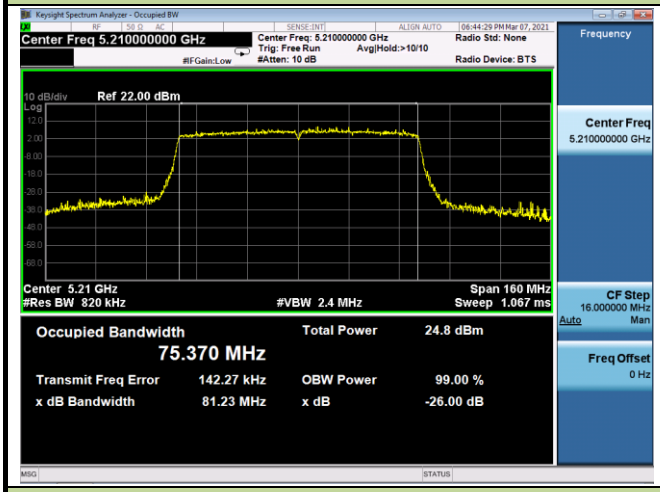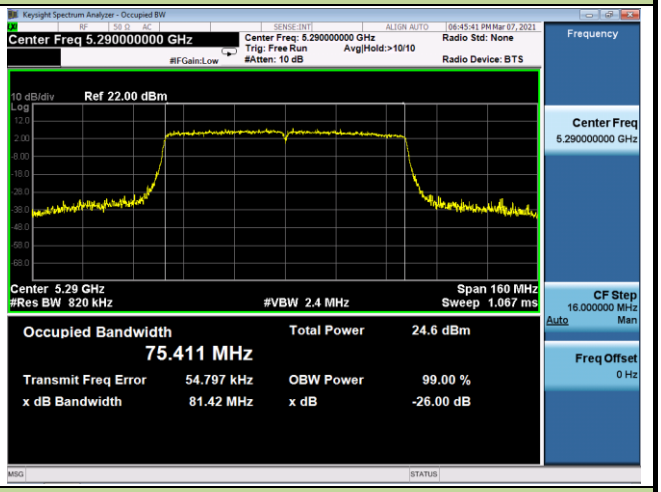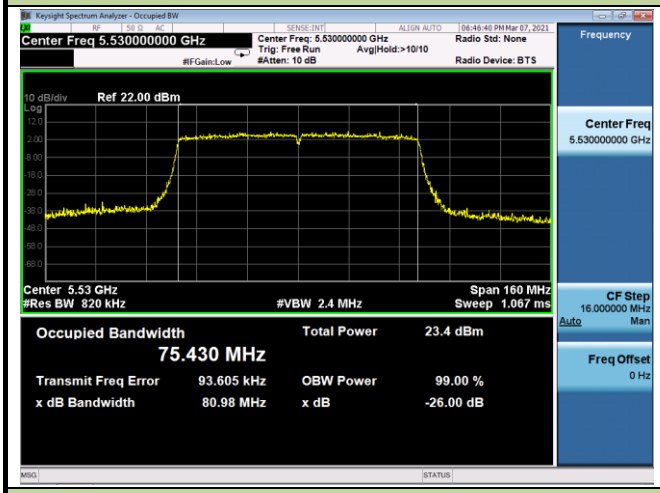
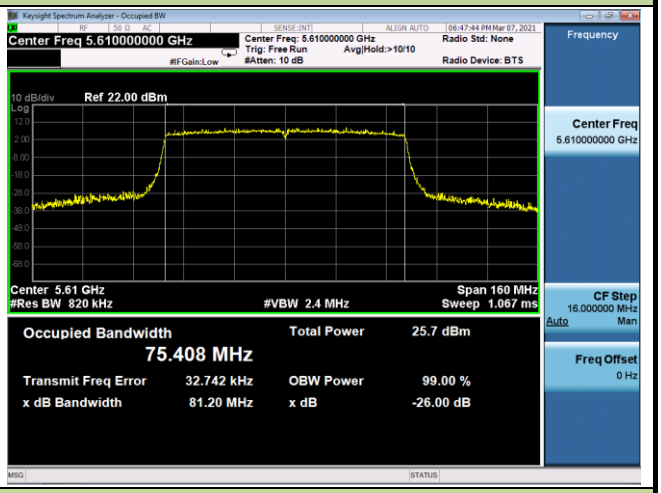
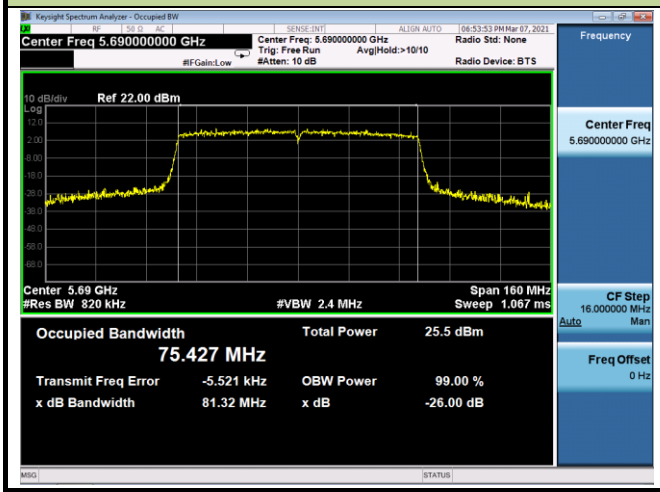
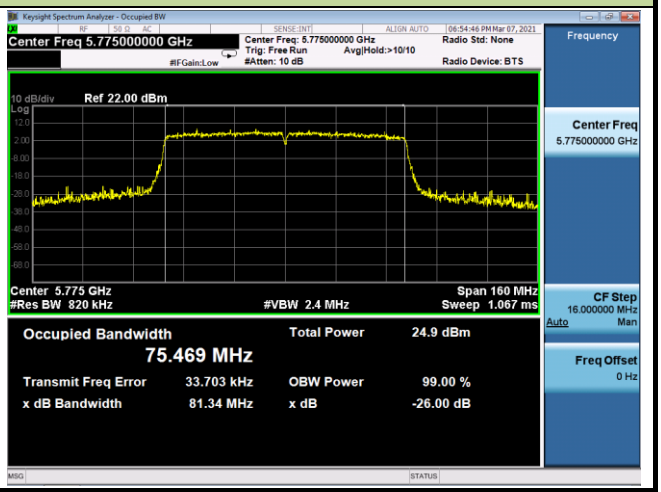
802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth	
Channel 42 (5210MHz)	Channel 58 (5290MHz)
	
Channel 106 (5530MHz)	Channel 122 (5610MHz)
	
Channel 138 (5690MHz)	Channel 155 (5775MHz)
	

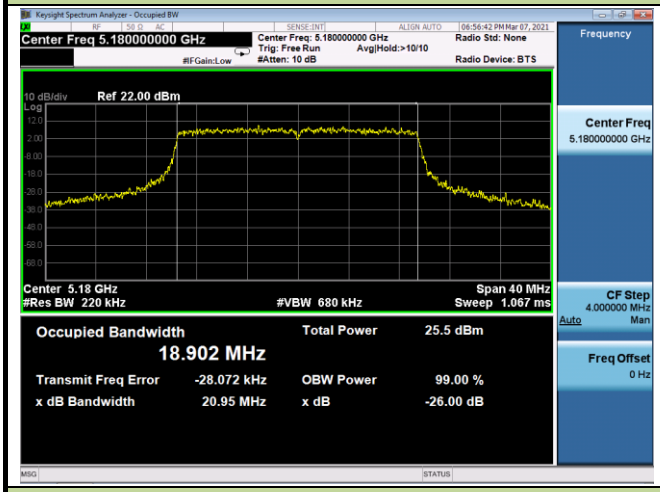
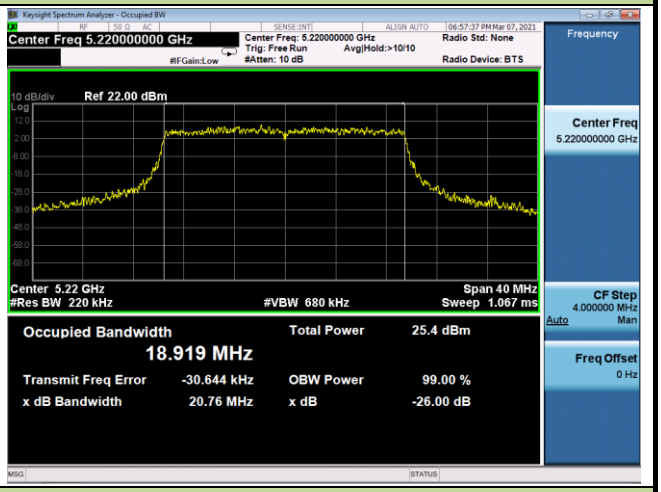
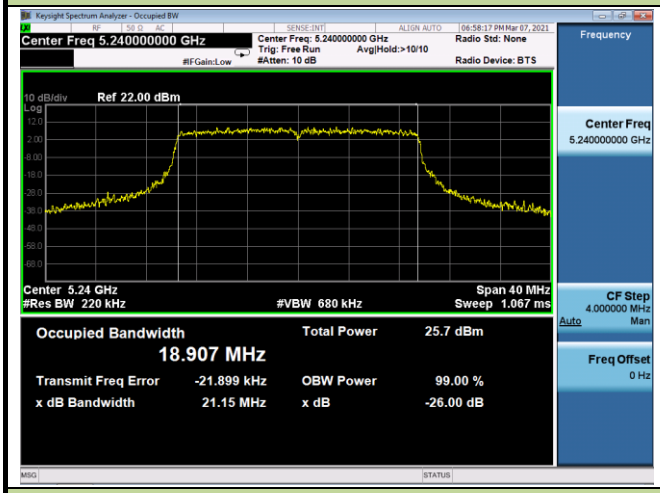
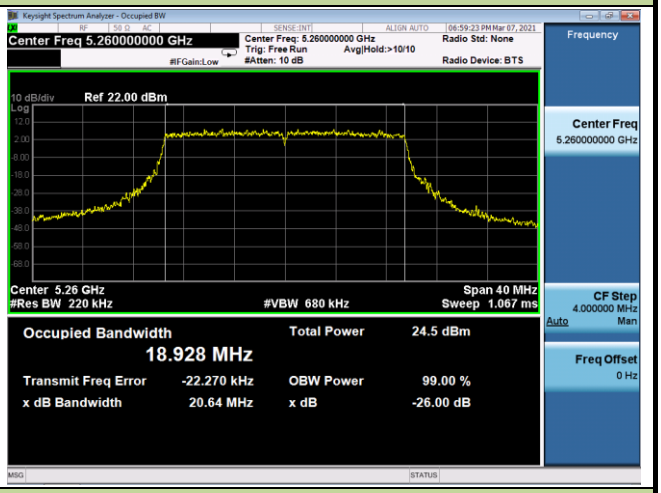
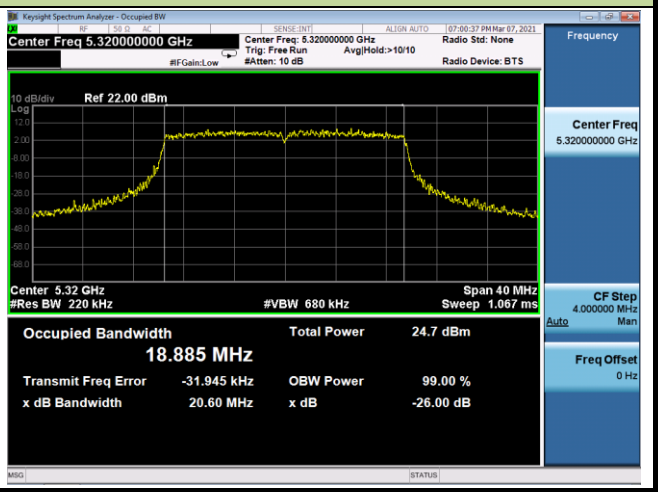
802.11ax-HE20 26dB Bandwidth & 99% Bandwidth	
Channel 36 (5180MHz)	Channel 44 (5220MHz)
	
Channel 48 (5240MHz)	Channel 52 (5260MHz)
	
Channel 60 (5300MHz)	Channel 64 (5320MHz)
	

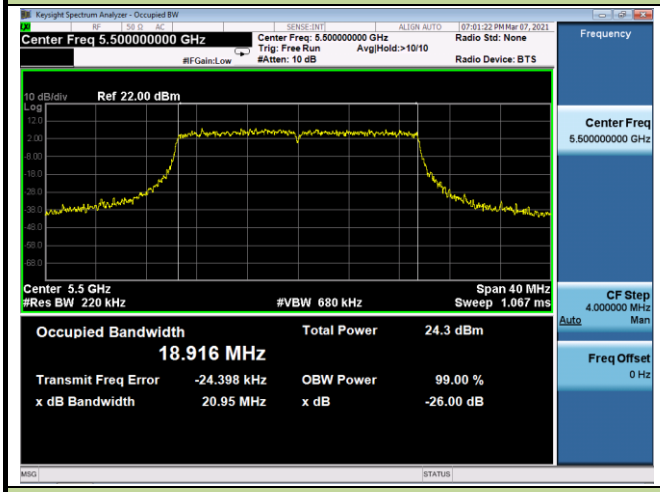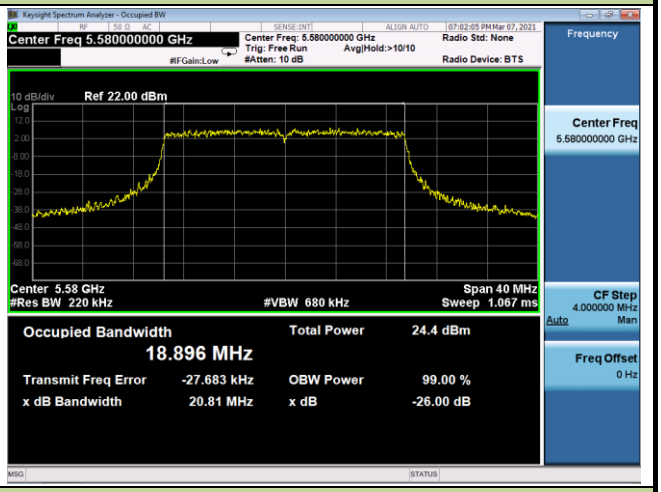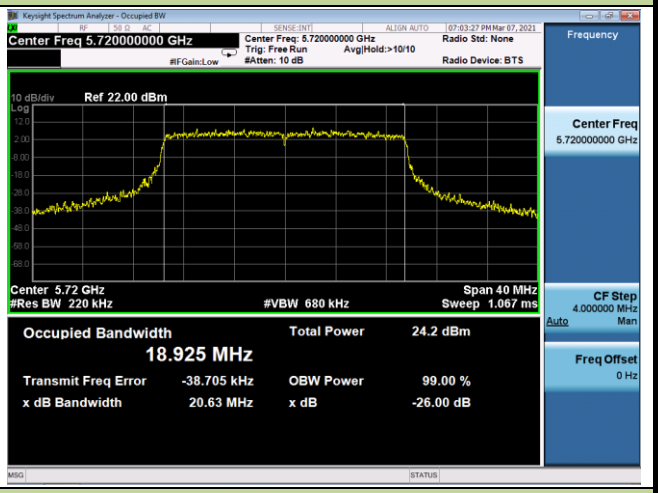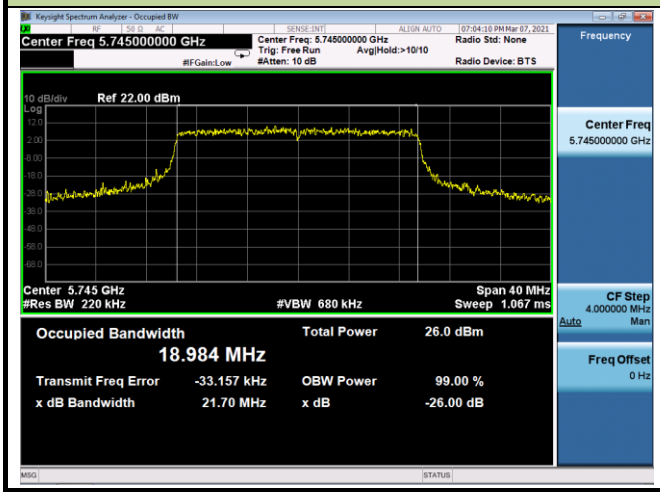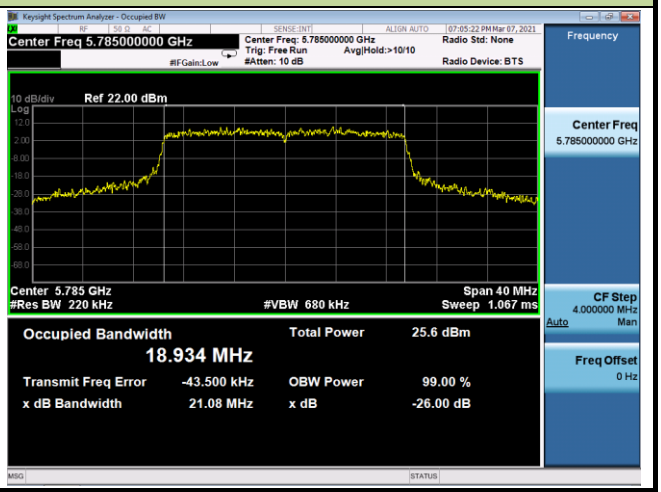802.11ax-HE20 26dB Bandwidth & 99% Bandwidth	
Channel 100 (5500MHz)	Channel 116 (5580MHz)
	
Channel 140 (5700MHz)	Channel 144 (5720MHz)
	
Channel 149 (5745MHz)	Channel 157 (5785MHz)
	

802.11ax-HE20 26dB Bandwidth & 99% Bandwidth	
Channel 165 (5825MHz)	
	

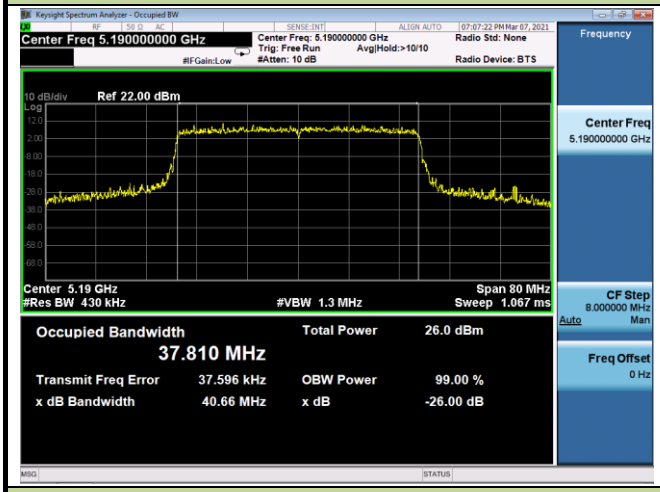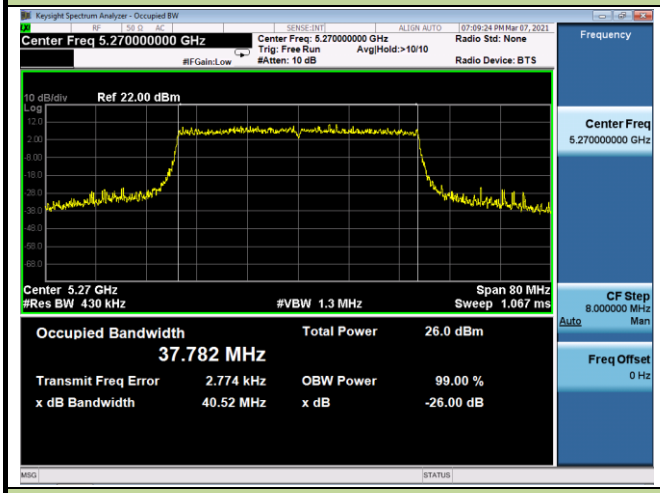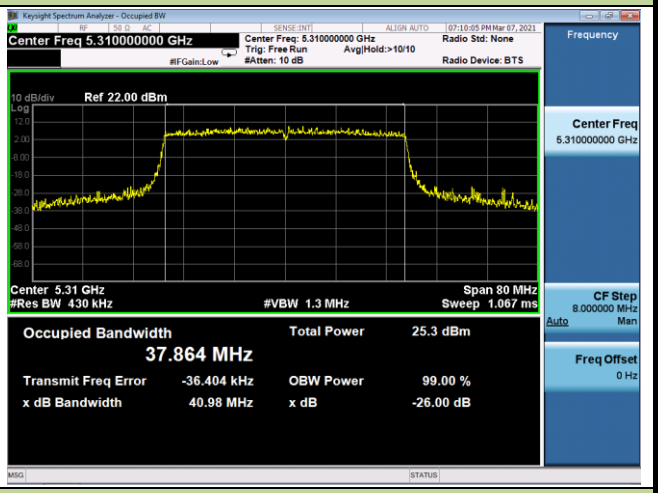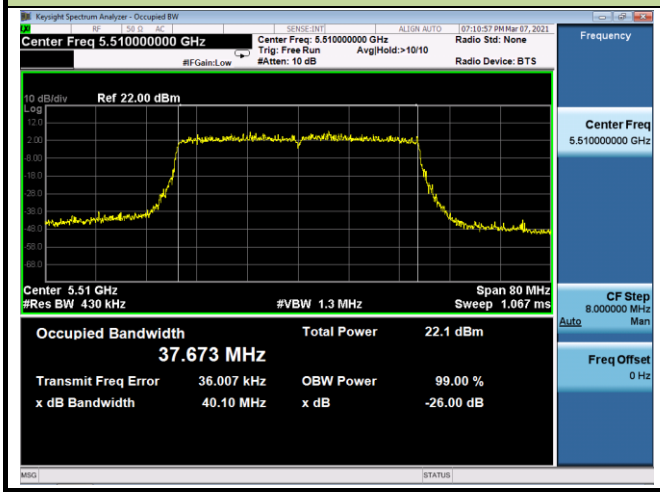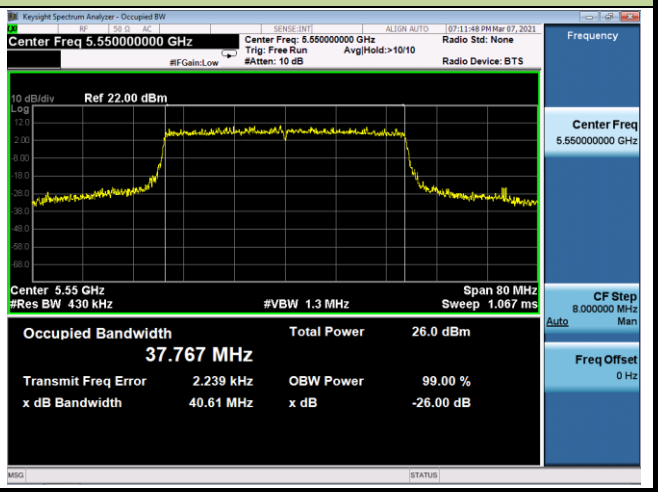802.11ax-HE40 26dB Bandwidth & 99% Bandwidth	
Channel 38 (5190MHz)	Channel 46 (5230MHz)
	
Channel 54 (5270MHz)	Channel 62 (5310MHz)
	
Channel 102 (5510MHz)	Channel 110 (5550MHz)
	

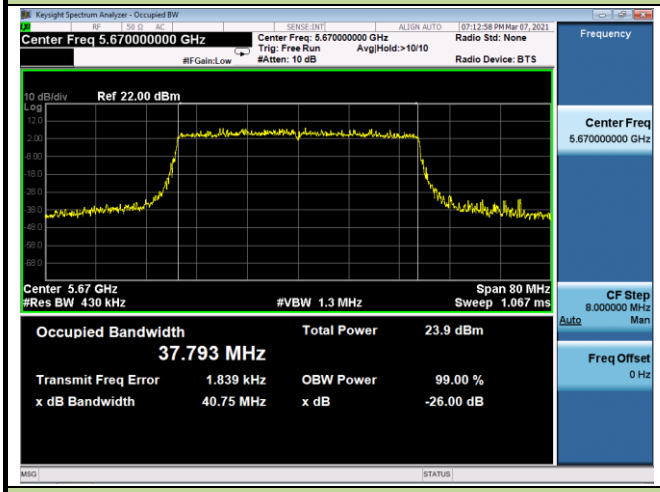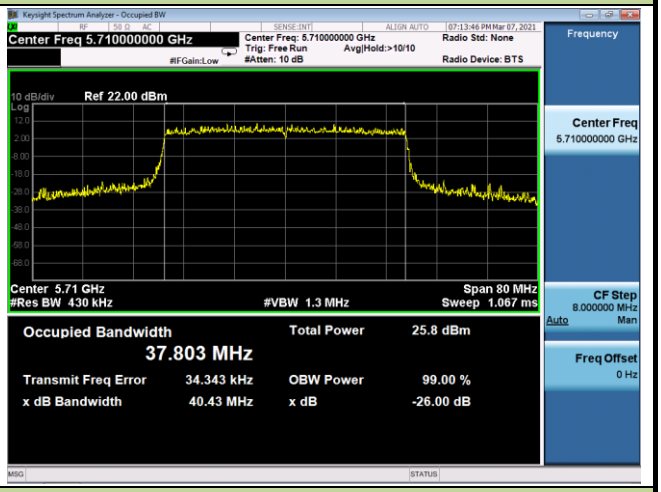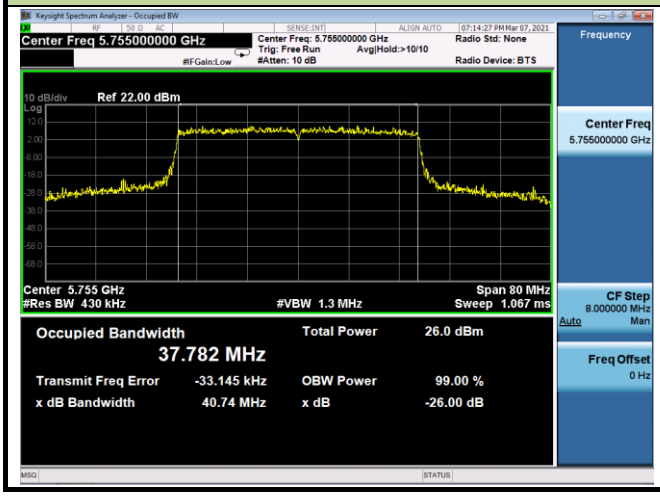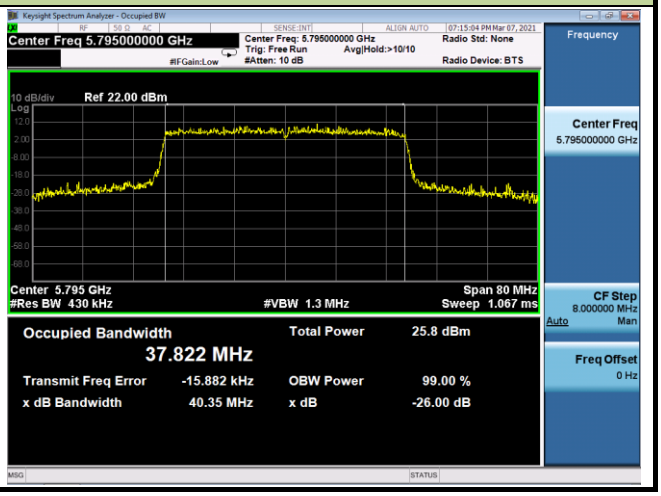802.11ax-HE40 26dB Bandwidth & 99% Bandwidth	
Channel 134 (5670MHz)	Channel 142 (5710MHz)
	
Channel 151 (5755MHz)	Channel 159 (5795MHz)
	

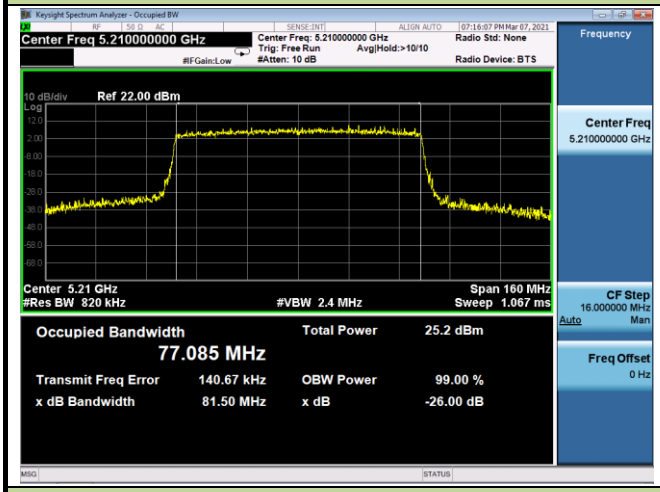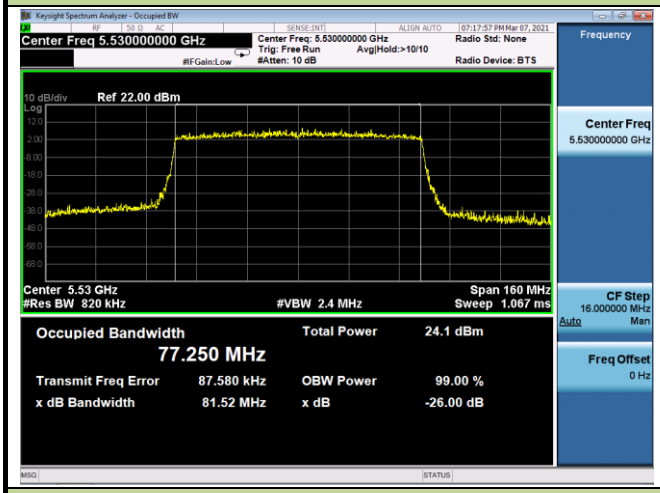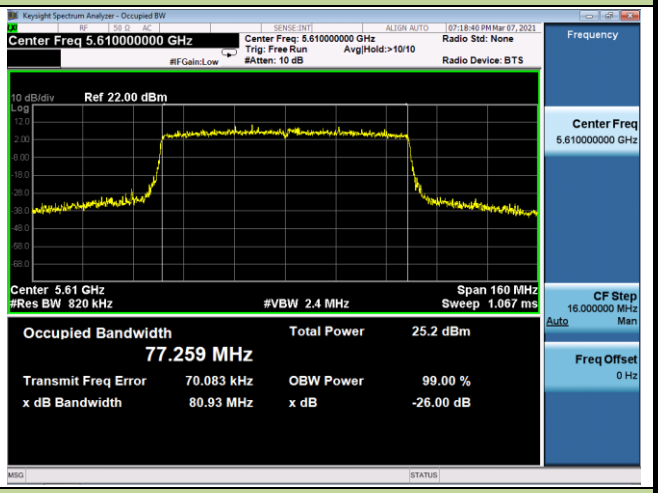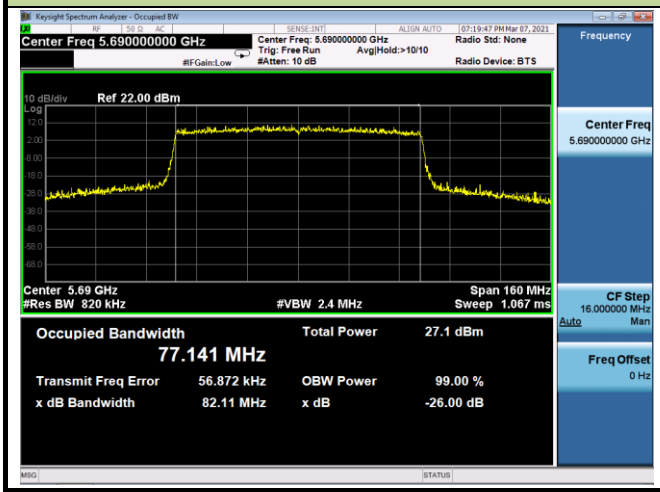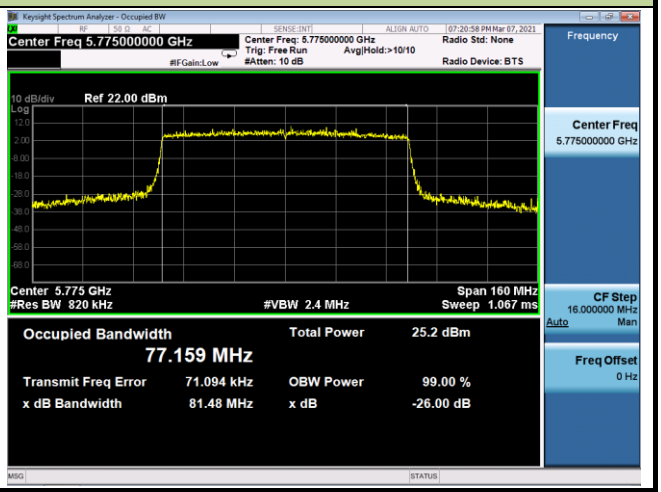802.11ax-HE80 26dB Bandwidth & 99% Bandwidth	
Channel 42 (5210MHz)	Channel 58 (5290MHz)
	
Channel 106 (5530MHz)	Channel 122 (5610MHz)
	
Channel 138 (5690MHz)	Channel 155 (5775MHz)
	

5.7. 功率頻譜密度

5.7.1 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀RF輸入端，量測定於1MHz/500kHz頻寬。

5.7.2 限制要求

依據國家通訊傳播委員會低功率射頻器材技術規範之第5.7.2(1)(2)(3)節


使用於5.15 GHz～5.25 GHz 頻段，供用戶端裝置(Client Device)操作使用，在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於11 dBm。

使用頻率於5.25 GHz～5.35 GHz 與5.470 GHz～5.725 GHz 頻段，最大功率頻譜密度在任何1 MHz 頻帶中應小於或等於11 dBm。

使用頻率於5.725 GHz～5.850 GHz 頻段，在任何500 kHz 頻帶中最大功率頻譜密度應小於或等於30 dBm。

使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大功率頻譜密度。

5.7.3 測試架構圖

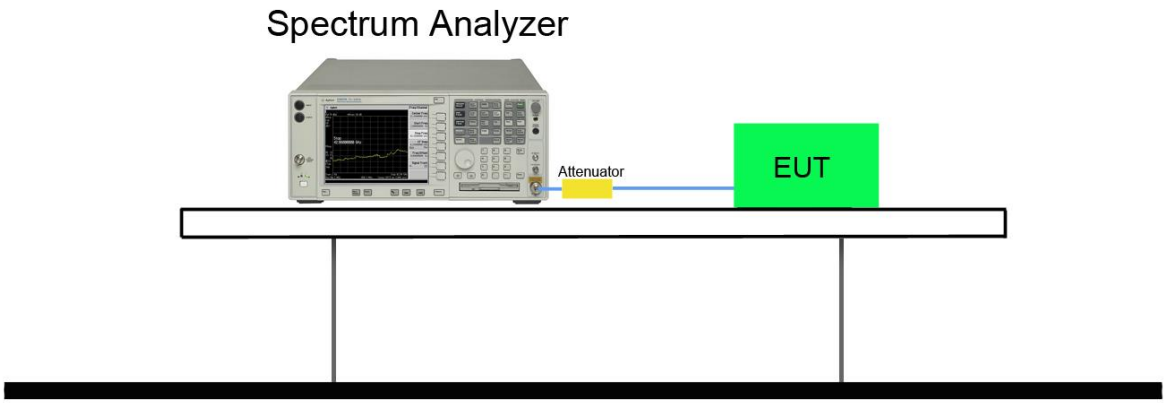

5.7.4 峰值功率頻譜密度測試結果

Product	ACCESS POINT	Temperature	23 ~ 25°C
Test Engineer	Eric Lin	Relative Humidity	40 ~ 56%
Test Site	SR2	Test Date	2021/03/07
Test Item	Power Spectral Density (U-NII -2A / U-NII -2C)		

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)	Result
11a	6Mbps	36	5180	6.95	7.52	92.98	10.57	≤ 15.09	Pass
11a	6Mbps	44	5220	7.31	7.81	92.98	10.89	≤ 15.09	Pass
11a	6Mbps	48	5240	7.21	7.66	92.98	10.77	≤ 15.09	Pass
11a	6Mbps	52	5260	5.53	5.69	92.98	8.94	≤ 9.09	Pass
11a	6Mbps	60	5300	5.31	5.68	92.98	8.83	≤ 9.09	Pass
11a	6Mbps	64	5320	5.50	5.85	92.98	9.00	≤ 9.09	Pass
11a	6Mbps	100	5500	5.39	5.84	92.98	8.95	≤ 9.09	Pass
11a	6Mbps	116	5580	5.54	5.80	92.98	9.00	≤ 9.09	Pass
11a	6Mbps	140	5700	5.61	5.75	92.98	9.01	≤ 9.09	Pass
11a	6Mbps	144	5720	5.42	5.77	92.98	8.92	≤ 9.09	Pass
11ac-VHT20	MCS0	36	5180	6.58	7.11	86.09	10.51	≤ 15.09	Pass
11ac-VHT20	MCS0	44	5220	6.70	7.26	86.09	10.65	≤ 15.09	Pass
11ac-VHT20	MCS0	48	5240	6.98	7.28	86.09	10.79	≤ 15.09	Pass
11ac-VHT20	MCS0	52	5260	5.08	5.40	86.09	8.90	≤ 9.09	Pass
11ac-VHT20	MCS0	60	5300	5.03	5.60	86.09	8.99	≤ 9.09	Pass
11ac-VHT20	MCS0	64	5320	5.12	5.49	86.09	8.97	≤ 9.09	Pass
11ac-VHT20	MCS0	100	5500	5.21	5.42	86.09	8.98	≤ 9.09	Pass
11ac-VHT20	MCS0	116	5580	5.20	5.46	86.09	8.99	≤ 9.09	Pass
11ac-VHT20	MCS0	140	5700	4.97	5.36	86.09	8.83	≤ 9.09	Pass
11ac-VHT20	MCS0	144	5720	5.13	5.47	86.09	8.96	≤ 9.09	Pass
11ac-VHT40	MCS0	38	5190	3.30	3.93	87.53	7.22	≤ 15.09	Pass
11ac-VHT40	MCS0	46	5230	3.52	4.24	87.53	7.48	≤ 15.09	Pass
11ac-VHT40	MCS0	54	5270	3.77	4.26	87.53	7.61	≤ 9.09	Pass
11ac-VHT40	MCS0	62	5310	3.57	4.07	87.53	7.42	≤ 9.09	Pass
11ac-VHT40	MCS0	102	5510	2.78	3.25	87.53	6.61	≤ 9.09	Pass
11ac-VHT40	MCS0	110	5550	4.16	4.50	87.53	7.92	≤ 9.09	Pass
11ac-VHT40	MCS0	134	5670	3.69	3.98	87.53	7.43	≤ 9.09	Pass
11ac-VHT40	MCS0	142	5710	3.82	4.27	87.53	7.64	≤ 9.09	Pass

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)	Result
11ac-VHT80	MCS0	42	5210	-0.61	0.06	87.25	3.34	≤ 15.09	Pass
11ac-VHT80	MCS0	58	5290	-0.38	0.17	87.25	3.51	≤ 9.09	Pass
11ac-VHT80	MCS0	106	5530	-1.68	-1.36	87.25	2.09	≤ 9.09	Pass
11ac-VHT80	MCS0	122	5610	0.23	0.45	87.25	3.94	≤ 9.09	Pass
11ac-VHT80	MCS0	138	5690	0.80	1.09	87.25	4.55	≤ 9.09	Pass
11ax-HE20	MCS0	36	5180	6.63	7.26	93.98	10.24	≤ 15.09	Pass
11ax-HE20	MCS0	44	5220	7.04	7.60	93.98	10.61	≤ 15.09	Pass
11ax-HE20	MCS0	48	5240	6.89	7.34	93.98	10.40	≤ 15.09	Pass
11ax-HE20	MCS0	52	5260	5.34	5.49	93.98	8.70	≤ 9.09	Pass
11ax-HE20	MCS0	60	5300	5.52	5.67	93.98	8.88	≤ 9.09	Pass
11ax-HE20	MCS0	64	5320	5.32	5.74	93.98	8.82	≤ 9.09	Pass
11ax-HE20	MCS0	100	5500	5.36	5.77	93.98	8.85	≤ 9.09	Pass
11ax-HE20	MCS0	116	5580	5.57	5.74	93.98	8.94	≤ 9.09	Pass
11ax-HE20	MCS0	140	5700	5.62	5.67	93.98	8.93	≤ 9.09	Pass
11ax-HE20	MCS0	144	5720	5.74	5.74	93.98	9.02	≤ 9.09	Pass
11ax-HE40	MCS0	38	5190	2.68	3.31	94.50	6.26	≤ 15.09	Pass
11ax-HE40	MCS0	46	5230	3.78	4.11	94.50	7.20	≤ 15.09	Pass
11ax-HE40	MCS0	54	5270	3.43	4.12	94.50	7.04	≤ 9.09	Pass
11ax-HE40	MCS0	62	5310	3.03	3.63	94.50	6.60	≤ 9.09	Pass
11ax-HE40	MCS0	102	5510	0.29	0.86	94.50	3.84	≤ 9.09	Pass
11ax-HE40	MCS0	110	5550	3.96	4.33	94.50	7.40	≤ 9.09	Pass
11ax-HE40	MCS0	134	5670	2.30	2.54	94.50	5.68	≤ 9.09	Pass
11ax-HE40	MCS0	142	5710	3.98	4.24	94.50	7.37	≤ 9.09	Pass
11ax-HE80	MCS0	42	5210	-0.18	0.42	93.28	3.44	≤ 15.09	Pass
11ax-HE80	MCS0	58	5290	-1.14	-0.44	93.28	2.54	≤ 9.09	Pass
11ax-HE80	MCS0	106	5530	-1.96	-1.59	93.28	1.54	≤ 9.09	Pass
11ax-HE80	MCS0	122	5610	0.04	0.58	93.28	3.63	≤ 9.09	Pass
11ax-HE80	MCS0	138	5690	0.98	1.35	93.28	4.48	≤ 9.09	Pass






Note: When EUT duty cycle ≥ 98%, the total PSD (dBm/MHz) = 10*log {$10^{(\text{Ant 0 PSD}/10)}$ + $10^{(\text{Ant 1 PSD}/10)}$} (dBm/MHz). When EUT duty cycle < 98%, the total PSD (dBm/MHz) = 10*log {$10^{(\text{Ant 0 PSD}/10)}$ + $10^{(\text{Ant 1 PSD}/10)}$} (dBm/MHz) + 10*log (1/Duty Cycle).







Product	ACCESS POINT	Temperature	24~27°C
Test Engineer	Eric Lin	Relative Humidity	58~60%
Test Site	SR2	Test Date	2021/03/07
Frequency Band	U-NII-3		


Test Mode	Data Rate/ MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/ 510kHz)	Ant 1 PSD (dBm/ 510kHz)	Duty Cycle (%)	Total PSD (dBm/ 510kHz)	Limit (dBm/ 510kHz)	Result
11a	6Mbps	149	5745	5.00	5.58	92.98	8.63	≤ 28.09	Pass
11a	6Mbps	157	5785	4.71	5.23	92.98	8.30	≤ 28.09	Pass
11a	6Mbps	165	5825	4.73	5.45	92.98	8.43	≤ 28.09	Pass
11ac-VHT20	MCS0	149	5745	4.51	4.83	86.09	8.33	≤ 28.09	Pass
11ac-VHT20	MCS0	157	5785	4.26	4.64	86.09	8.11	≤ 28.09	Pass
11ac-VHT20	MCS0	165	5825	4.28	4.72	86.09	8.17	≤ 28.09	Pass
11ac-VHT40	MCS0	151	5755	1.08	1.66	87.53	4.97	≤ 28.09	Pass
11ac-VHT40	MCS0	159	5795	0.98	1.42	87.53	4.79	≤ 28.09	Pass
11ac-VHT80	MCS0	155	5775	-3.05	-2.61	87.25	0.78	≤ 28.09	Pass
11ax-HE20	MCS0	149	5745	4.58	4.96	93.98	8.05	≤ 28.09	Pass
11ax-HE20	MCS0	157	5785	4.26	4.99	93.98	7.92	≤ 28.09	Pass
11ax-HE20	MCS0	165	5825	4.35	4.91	93.98	7.92	≤ 28.09	Pass
11ax-HE40	MCS0	151	5755	1.15	1.68	94.50	4.68	≤ 28.09	Pass
11ax-HE40	MCS0	159	5795	1.17	1.46	94.50	4.57	≤ 28.09	Pass
11ax-HE80	MCS0	155	5775	-3.32	-2.87	93.28	0.22	≤ 28.09	Pass




Note: When EUT duty cycle ≥ 98%, the total PSD (dBm/500kHz) = $10*\log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/500kHz)







When EUT duty cycle < 98%, the total PSD (dBm/500kHz) = $10*\log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/500kHz) + 10*log (1/Duty Cycle).

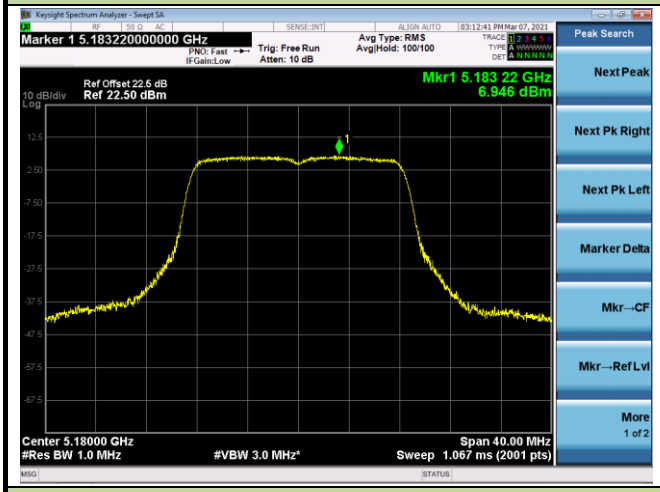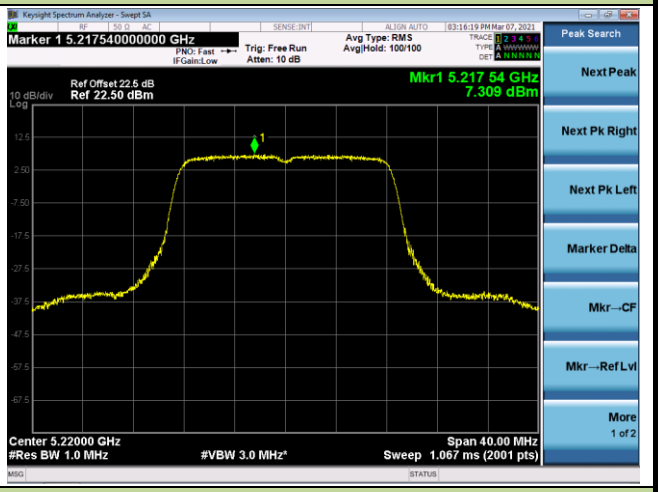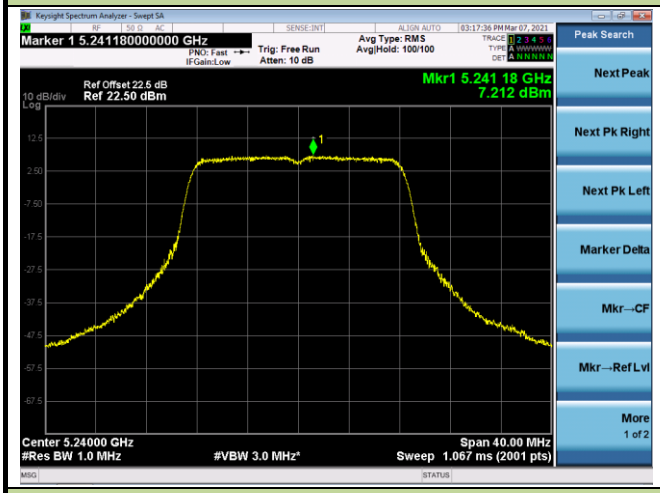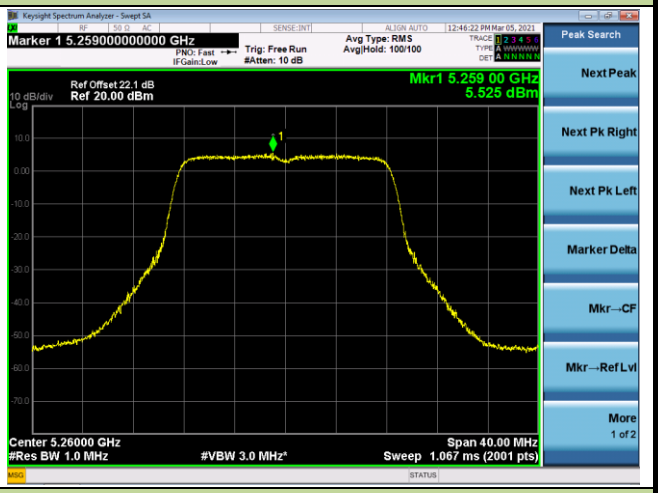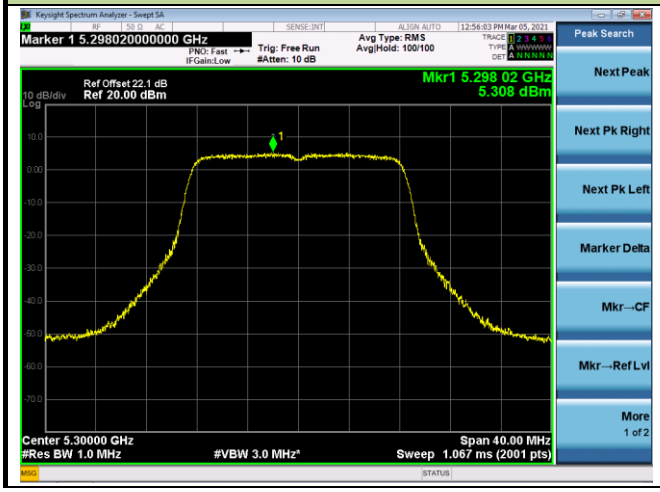
802.11a Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 36 (5180MHz)	Channel 44 (5220MHz)
	
Channel 48 (5240MHz)	Channel 52 (5260MHz)
	
Channel 60 (5300MHz)	Channel 64 (5320MHz)
	

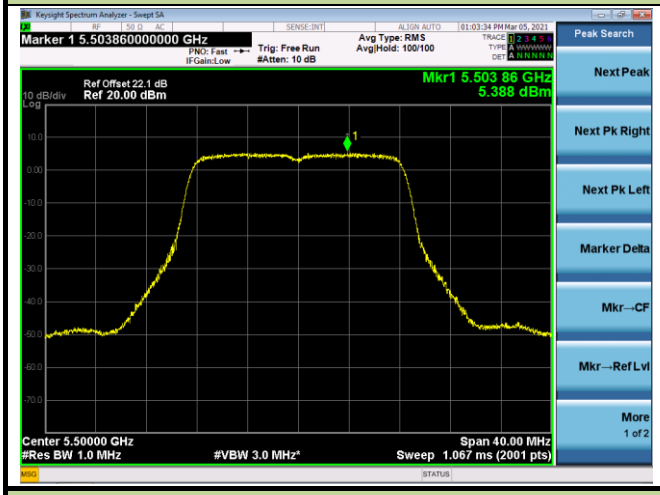
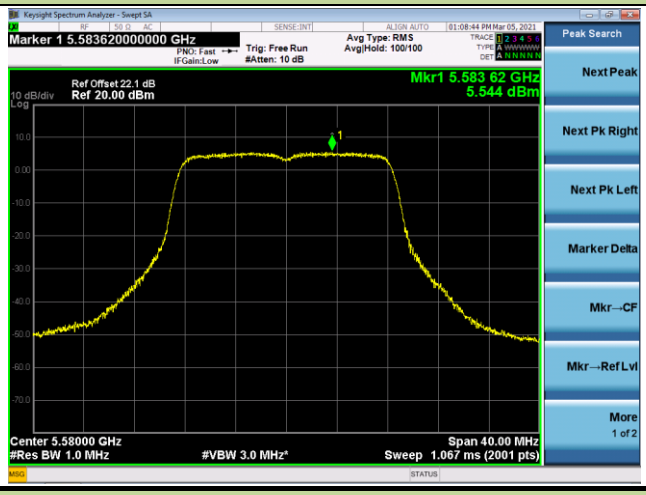
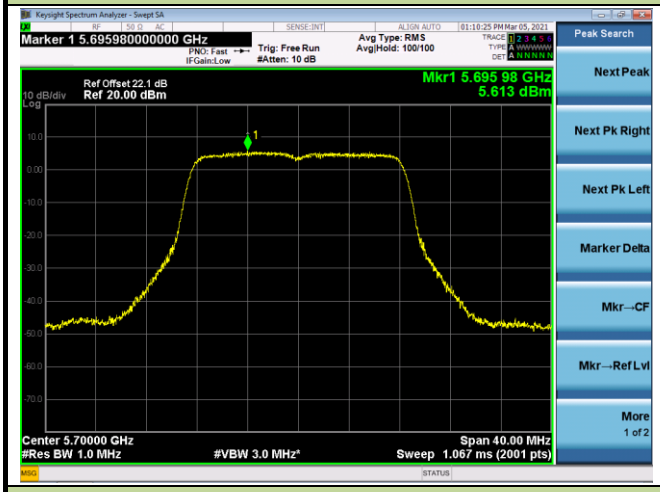
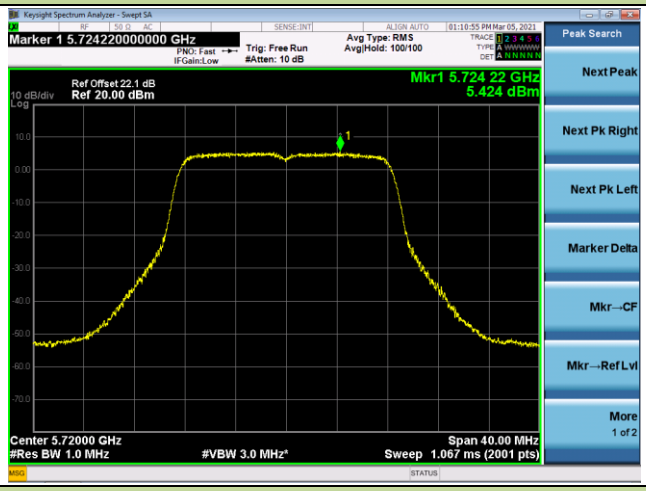
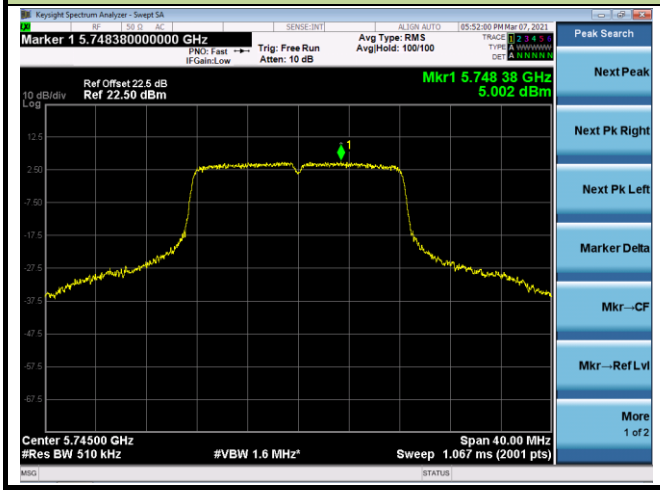
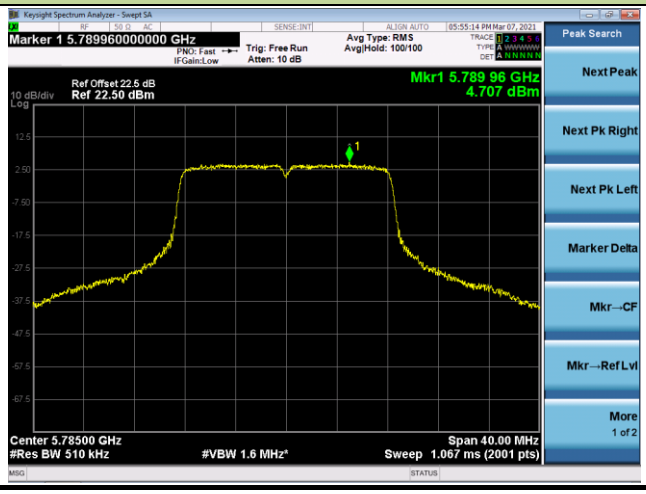
802.11a Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 100 (5500MHz)	Channel 116 (5580MHz)
	
Channel 140 (5700MHz)	Channel 144 (5720MHz)
	
Channel 149 (5745MHz)	Channel 157 (5785MHz)
	




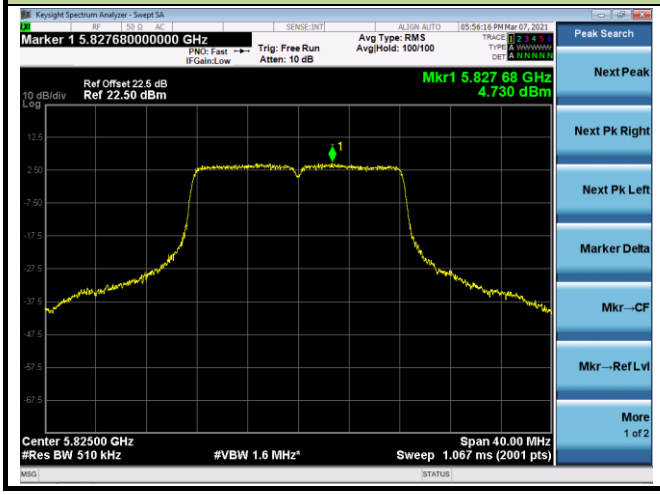
802.11a Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 165 (5825MHz)	
	




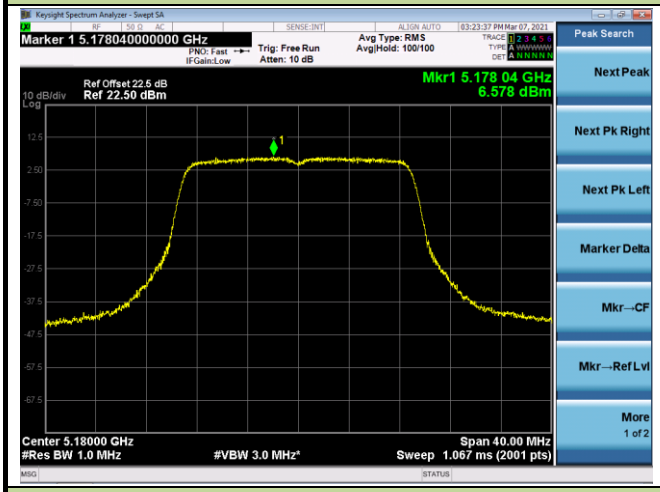
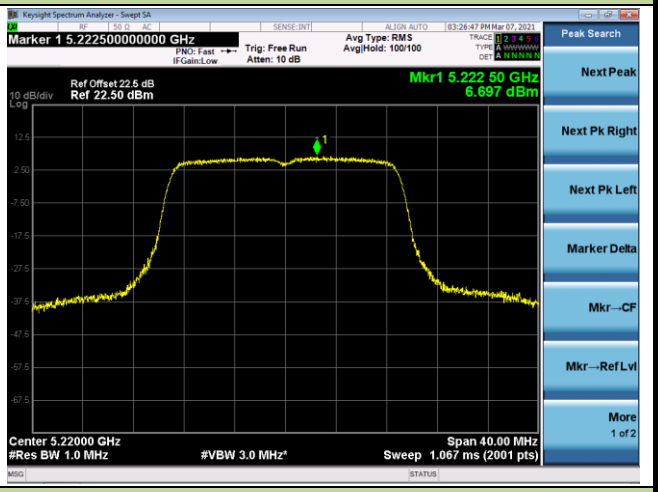
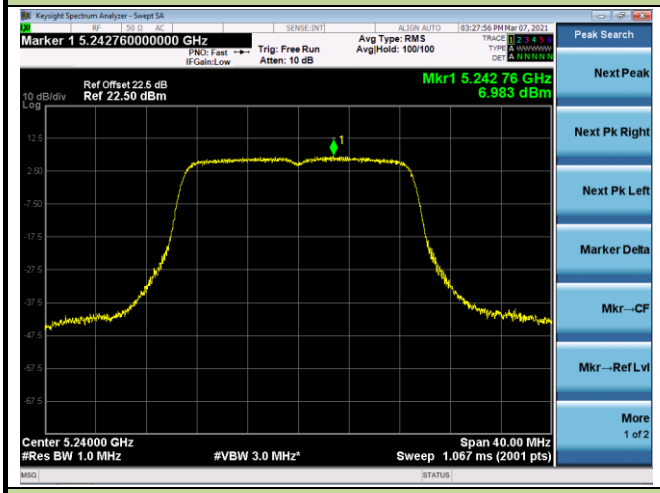
802.11ac-VHT20 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 36 (5180MHz)	Channel 44 (5220MHz)
	
Channel 48 (5240MHz)	Channel 52 (5260MHz)
	
Channel 60 (5300MHz)	Channel 64 (5320MHz)
	

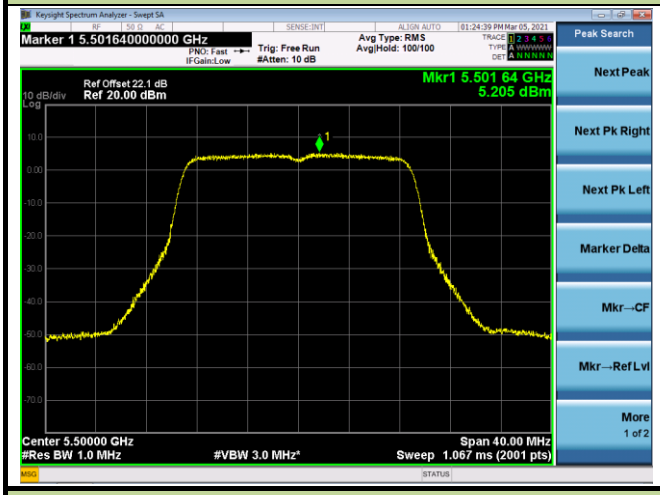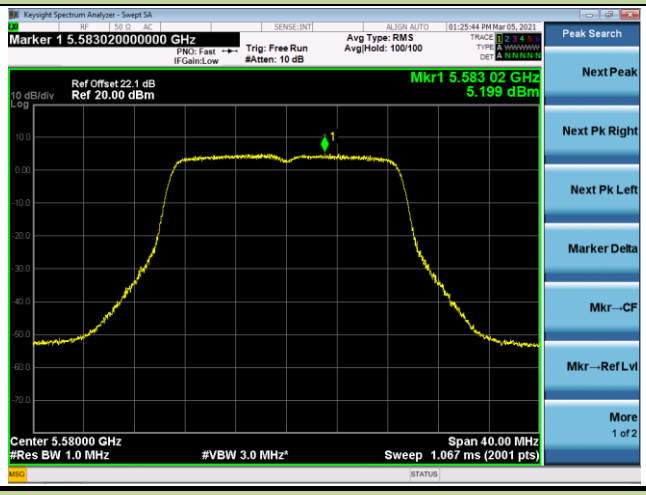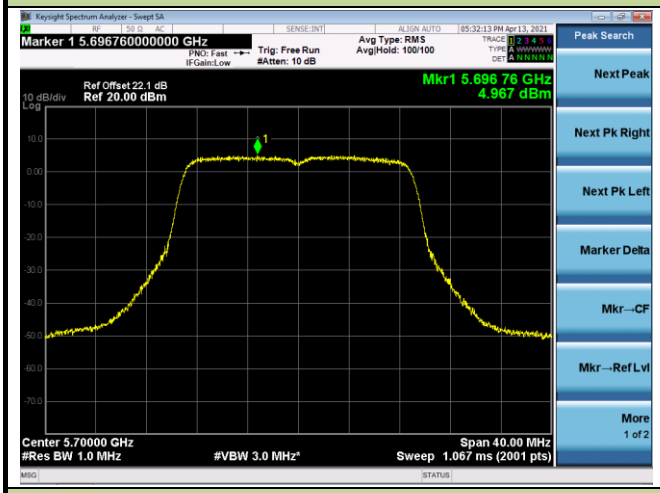
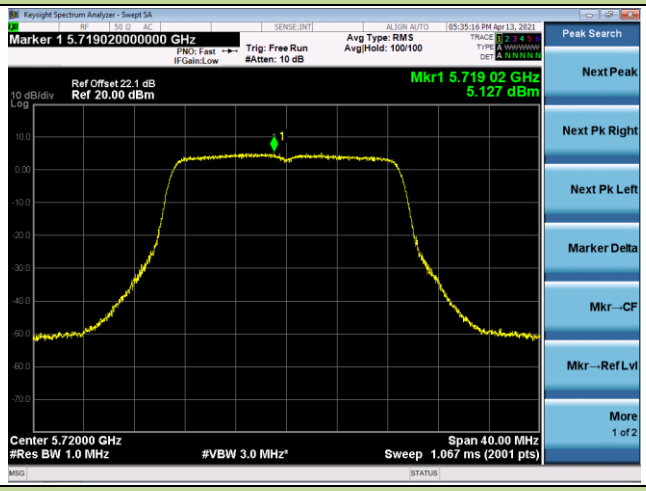
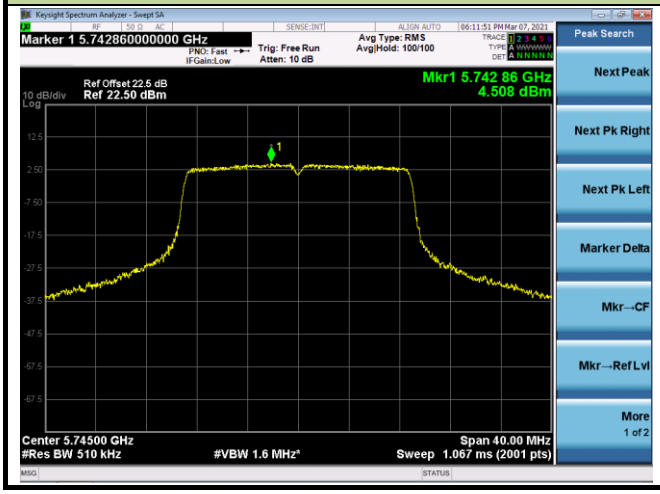
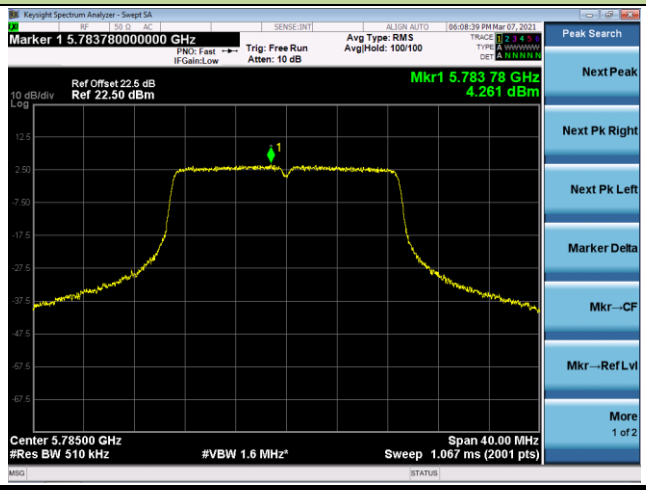
802.11ac-VHT20 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 100 (5500MHz)	Channel 116 (5580MHz)
	
Channel 140 (5700MHz)	Channel 144 (5720MHz)
	
Channel 149 (5745MHz)	Channel 157 (5785MHz)
	






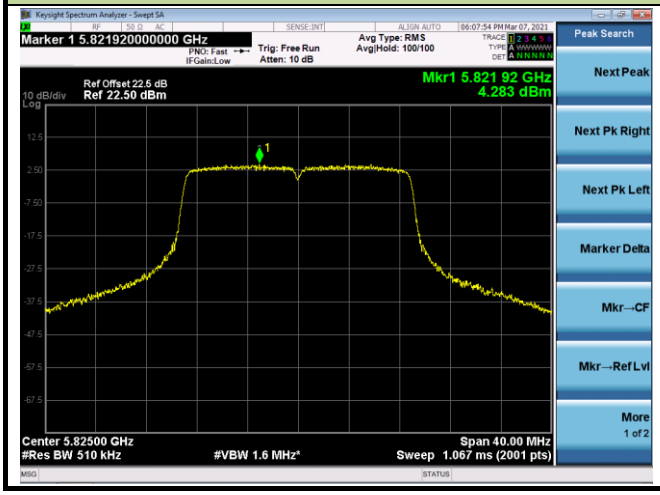
802.11ac-VHT20 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 165 (5825MHz)	
	

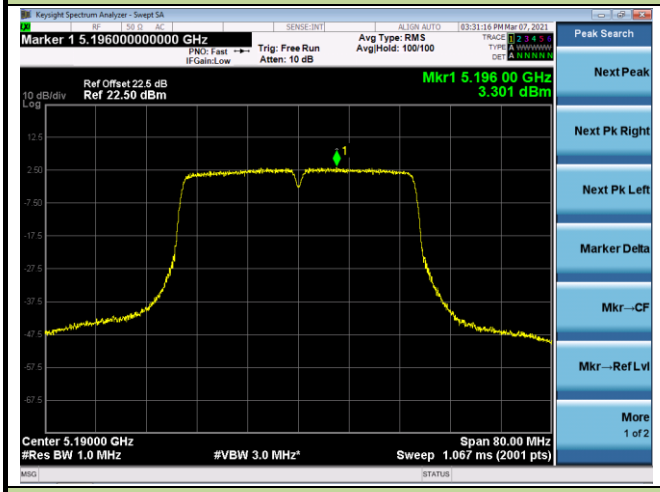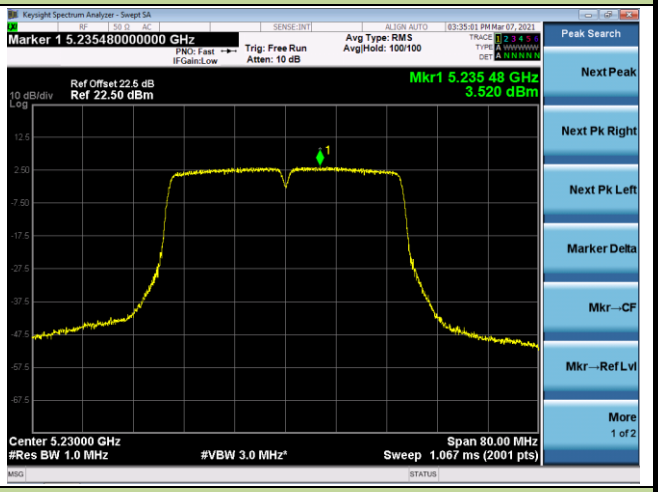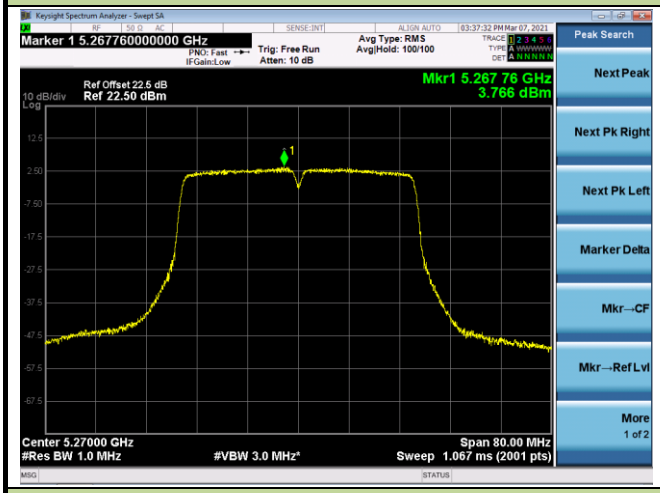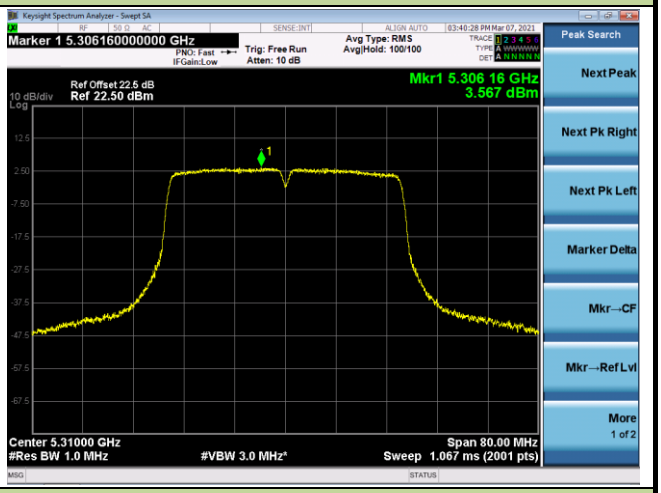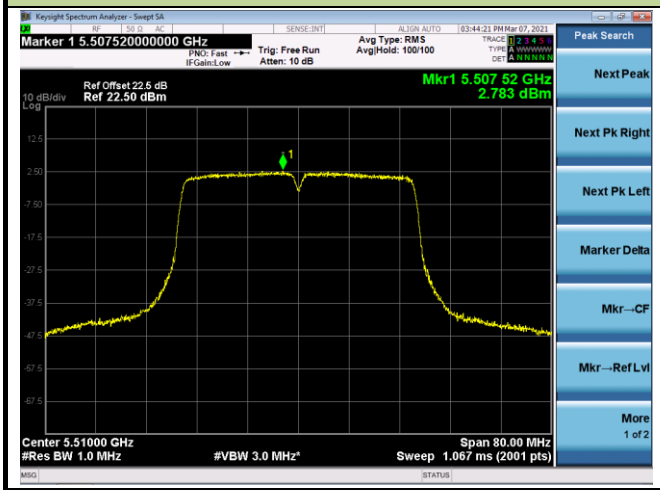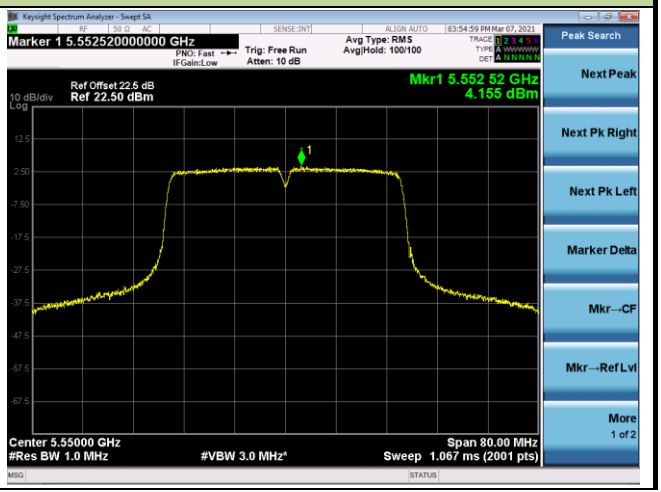
802.11ac-VHT40 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 38 (5190MHz)	Channel 46 (5230MHz)
	
Channel 54 (5270MHz)	Channel 62 (5310MHz)
	
Channel 102 (5510MHz)	Channel 110 (5550MHz)
	



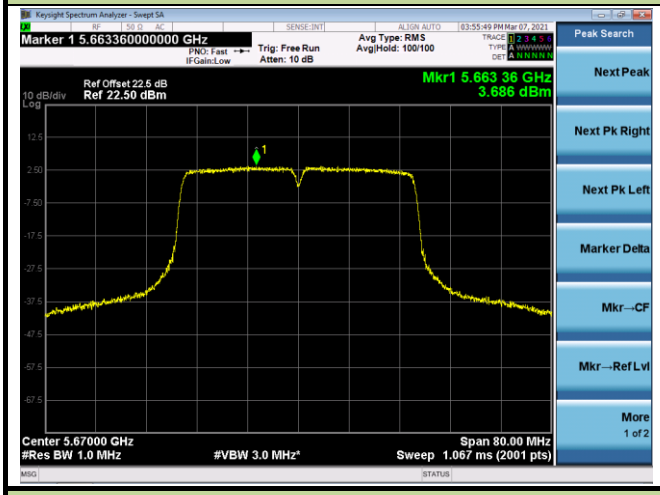
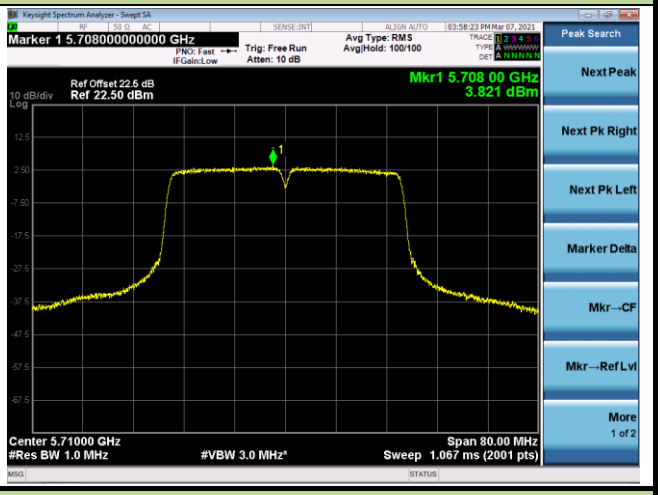
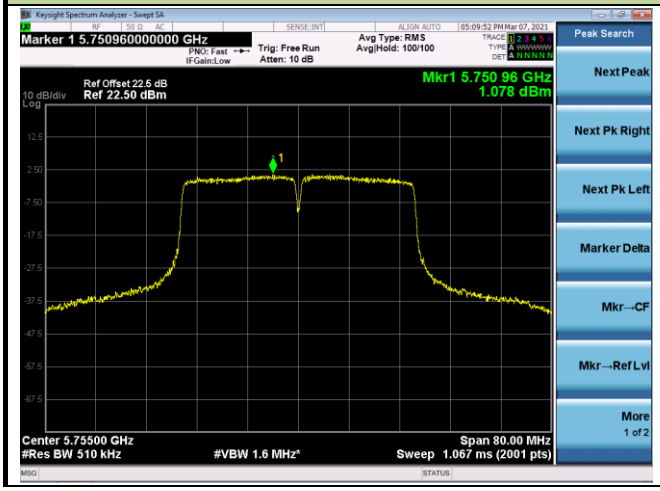
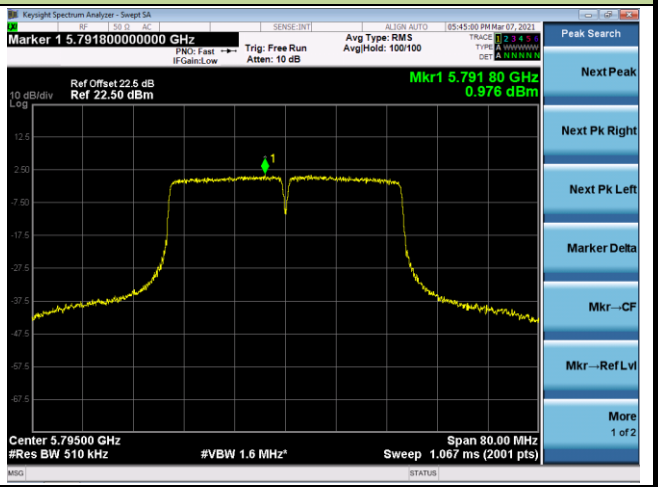
802.11ac-VHT40 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 134 (5670MHz)	Channel 142 (5710MHz)
	
Channel 151 (5755MHz)	Channel 159 (5795MHz)
	

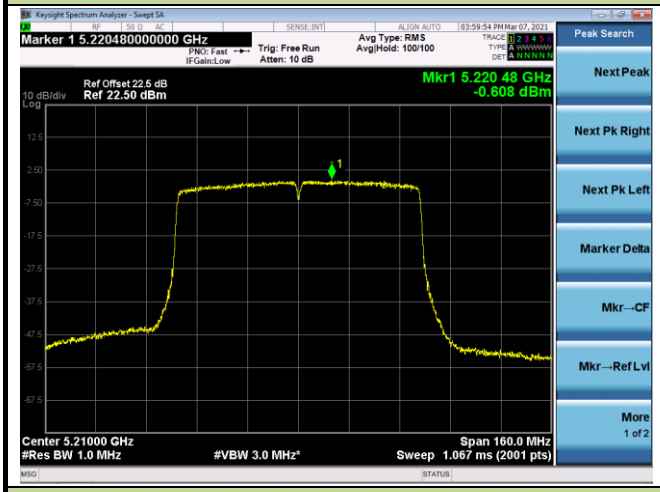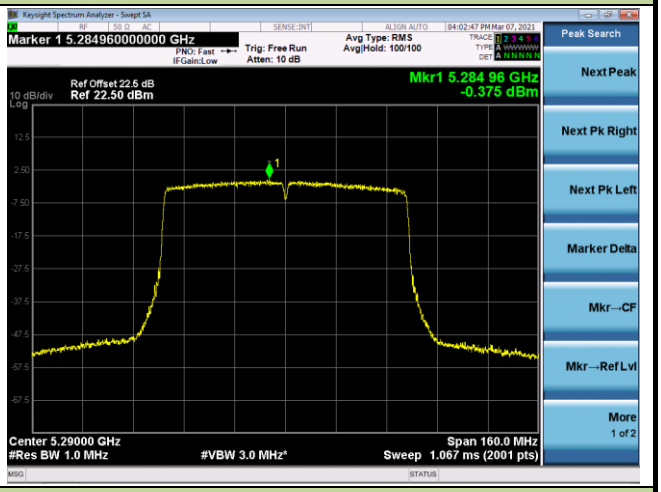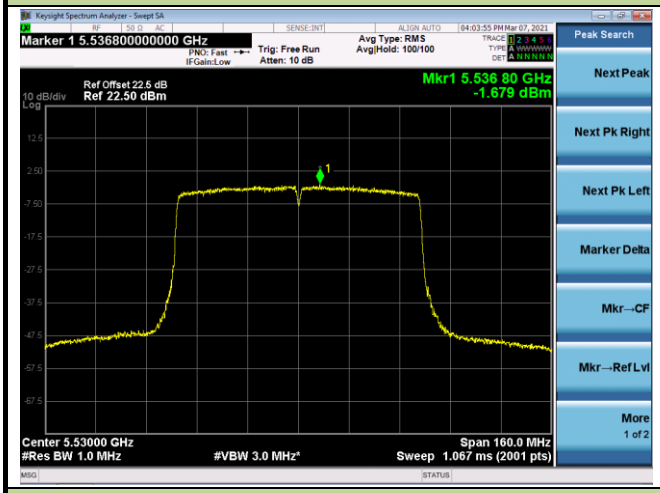
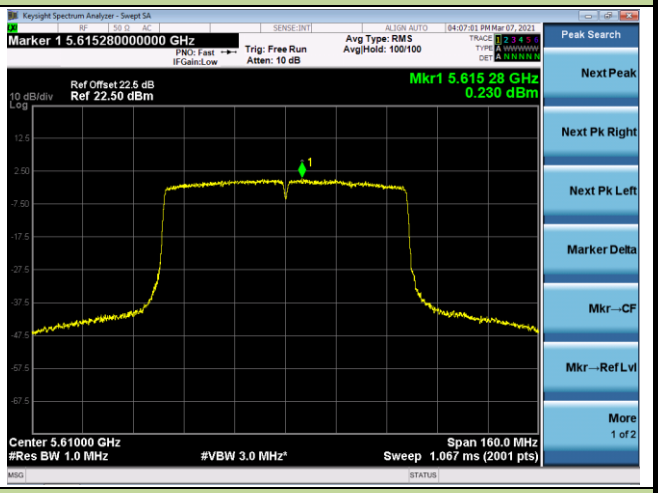
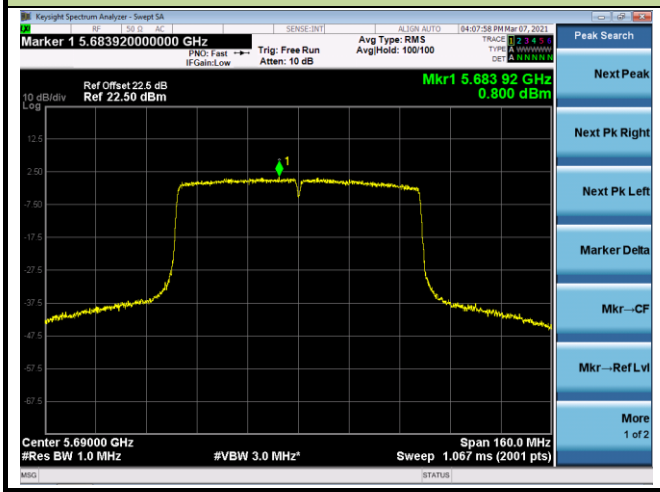
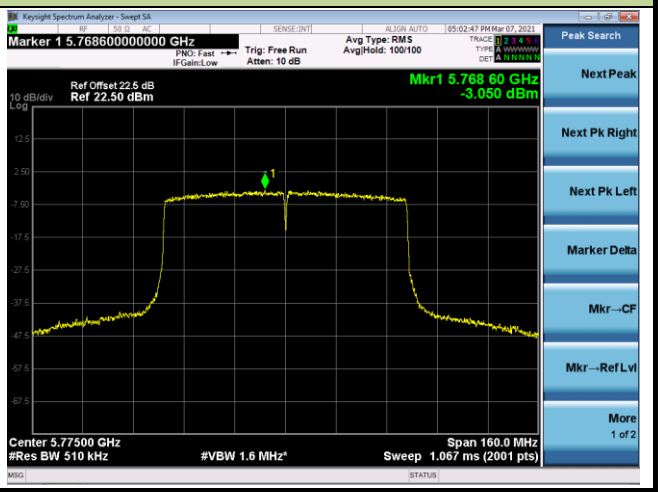
802.11ac-VHT80 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 42 (5210MHz)	Channel 58 (5290MHz)
	
Channel 106 (5530MHz)	Channel 122 (5610MHz)
	
Channel 138 (5690MHz)	Channel 155 (5775MHz)
	


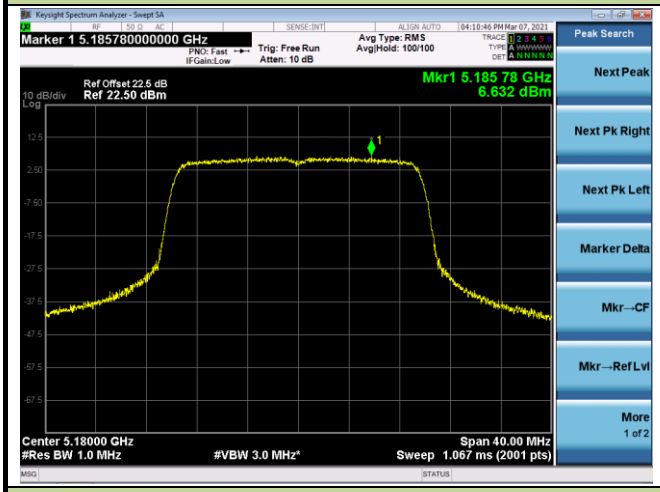
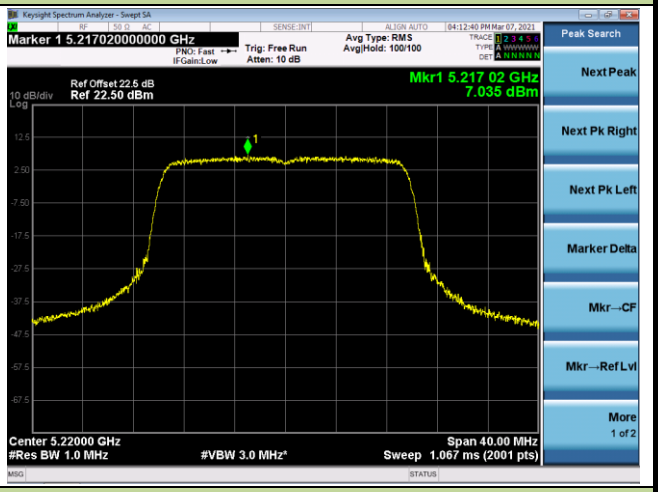
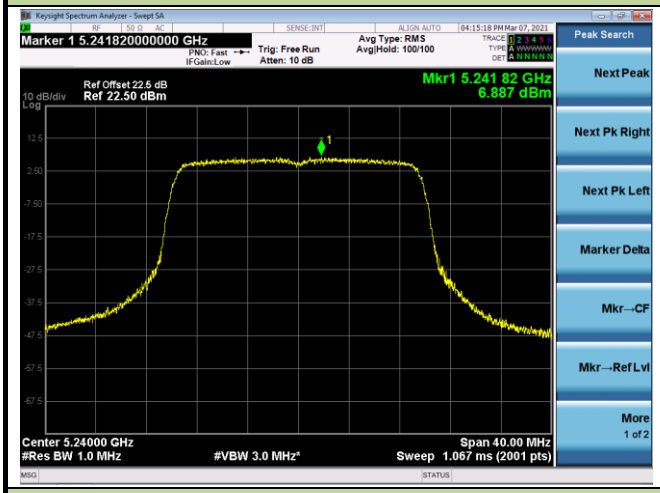
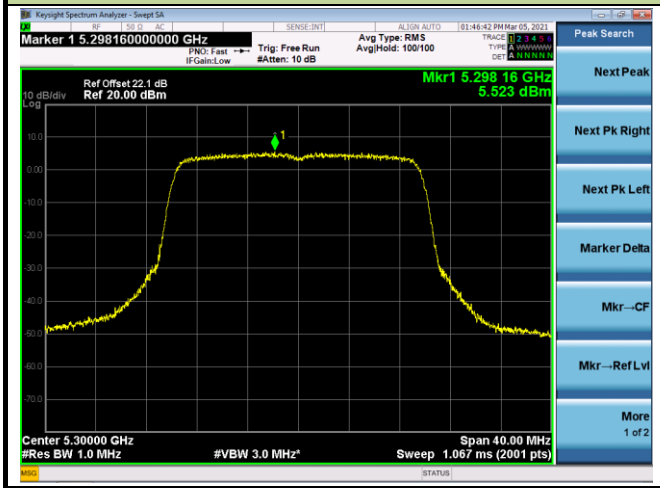
802.11ax-HE20 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 36 (5180MHz)	Channel 44 (5220MHz)
	
Channel 48 (5240MHz)	Channel 52 (5260MHz)
	
Channel 60 (5300MHz)	Channel 64 (5320MHz)
	

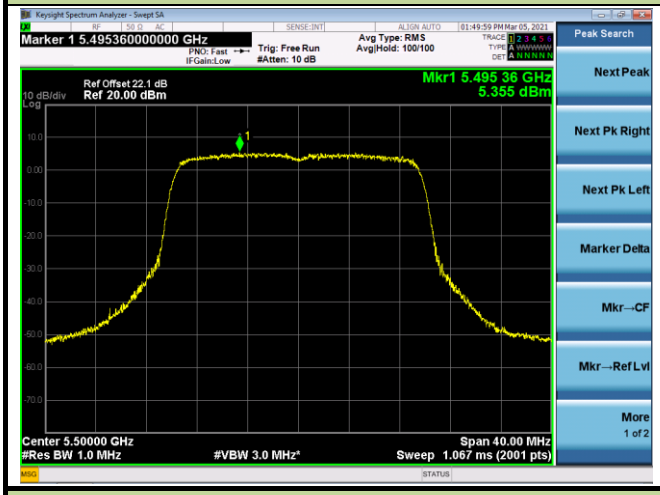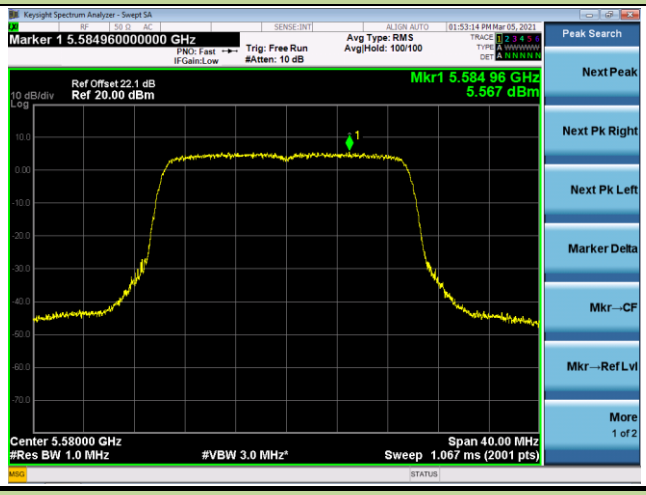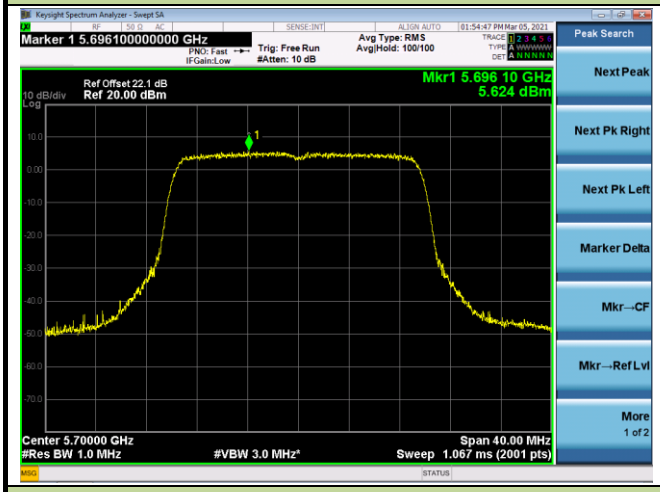
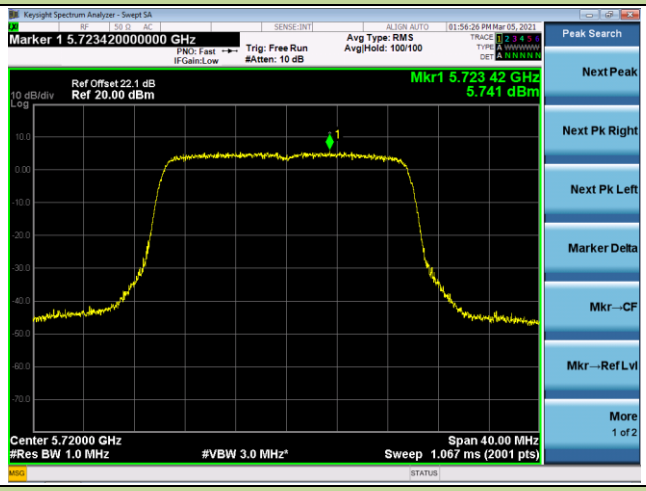
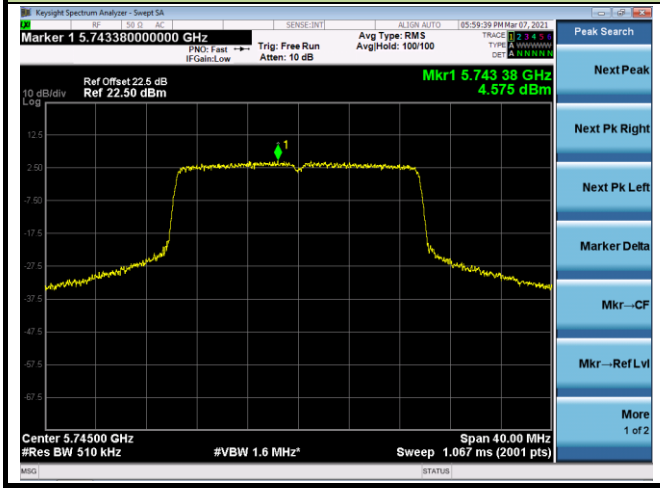
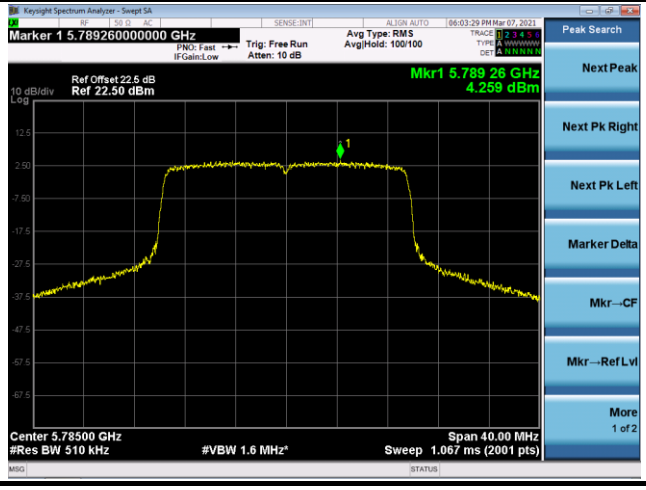
802.11ax-HE20 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 100 (5500MHz)	Channel 116 (5580MHz)
	
Channel 140 (5700MHz)	Channel 144 (5720MHz)
	
Channel 149 (5745MHz)	Channel 157 (5785MHz)
	






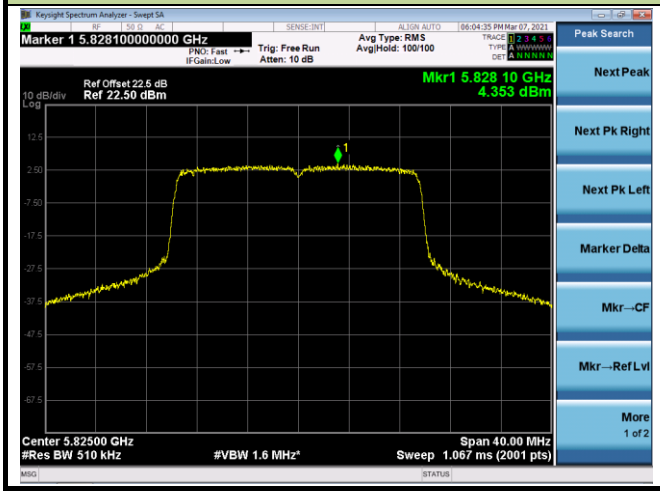
802.11ax-HE20 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 165 (5825MHz)	
	

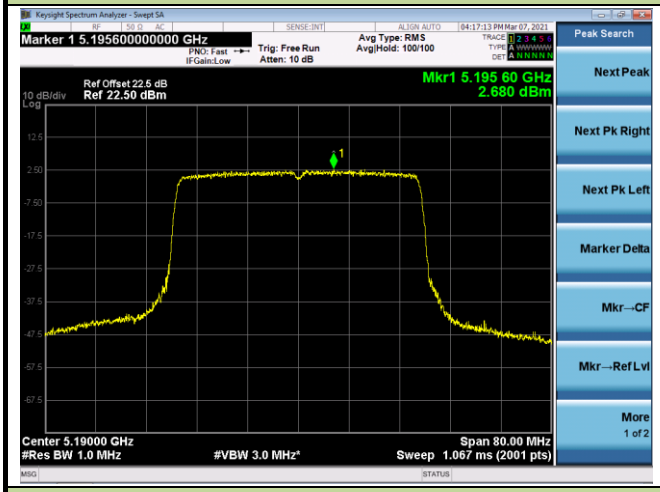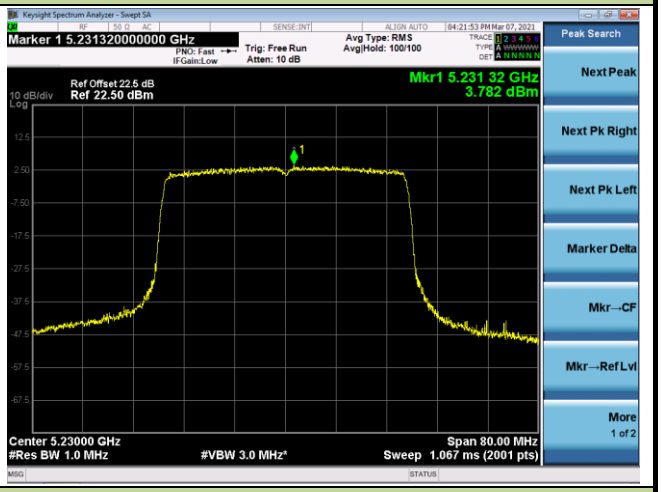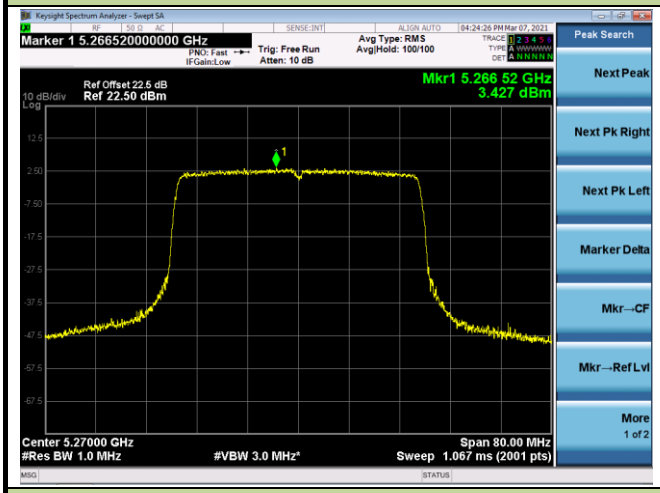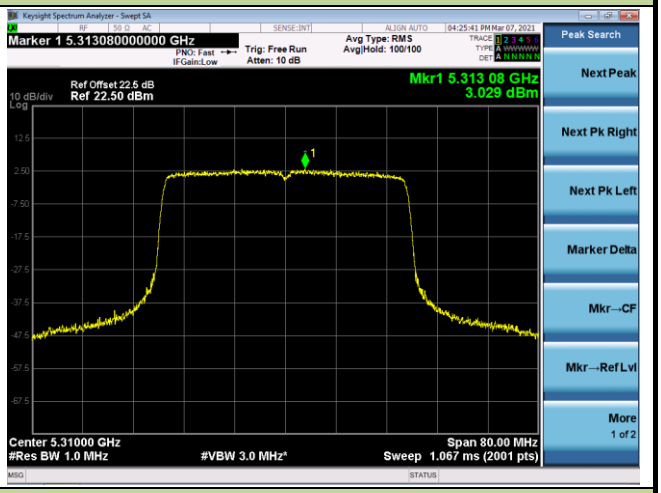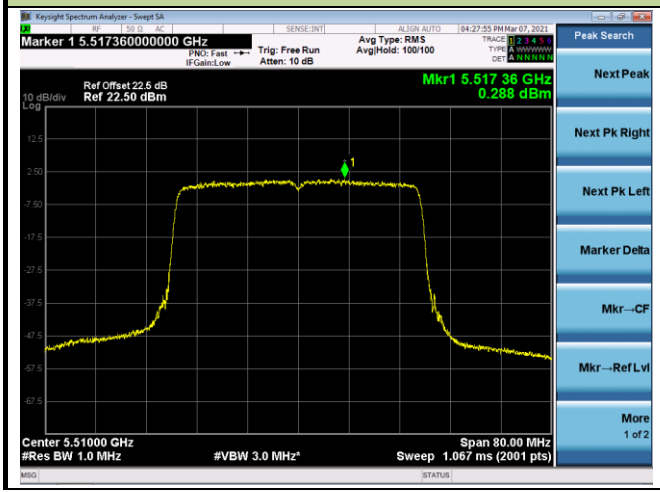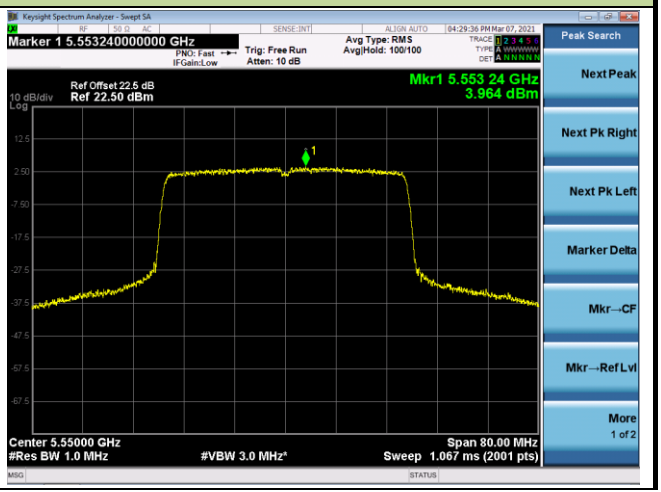
802.11ax-HE40 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 38 (5190MHz)	Channel 46 (5230MHz)
	
Channel 54 (5270MHz)	Channel 62 (5310MHz)
	
Channel 102 (5510MHz)	Channel 110 (5550MHz)
	


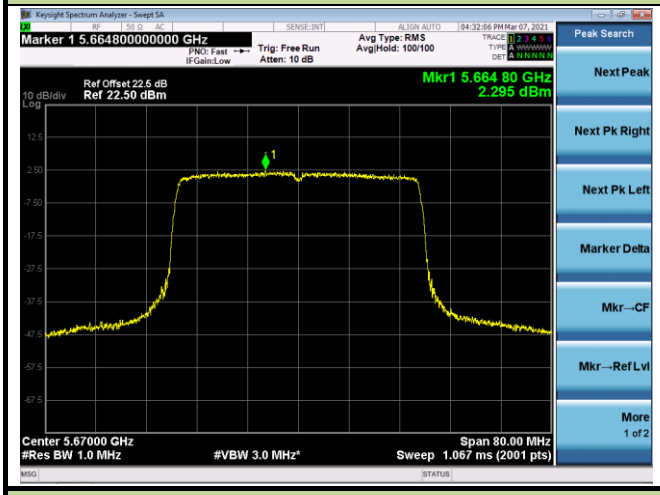
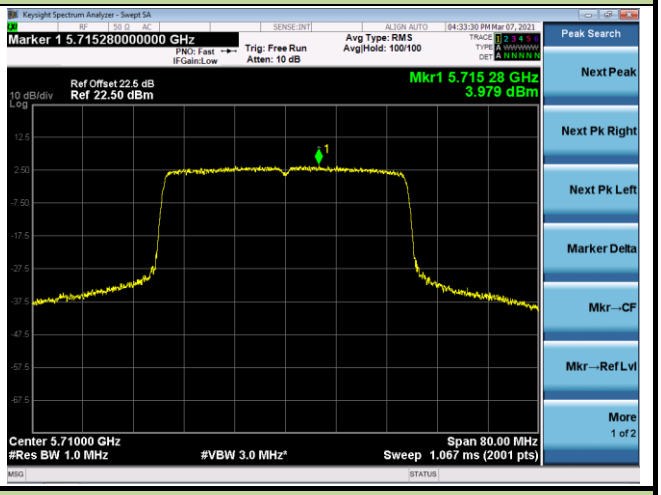
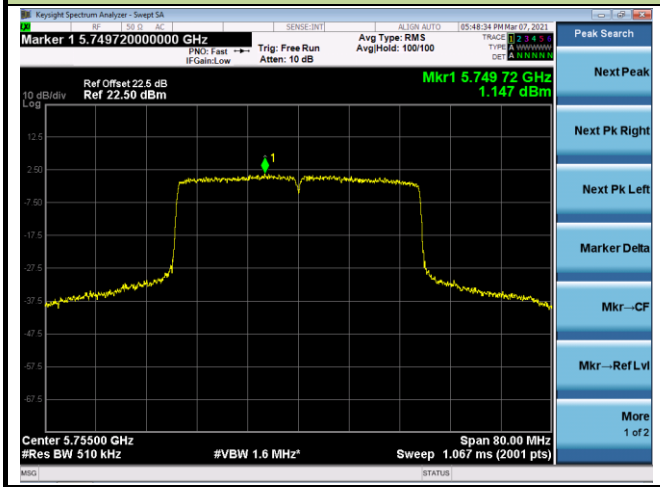
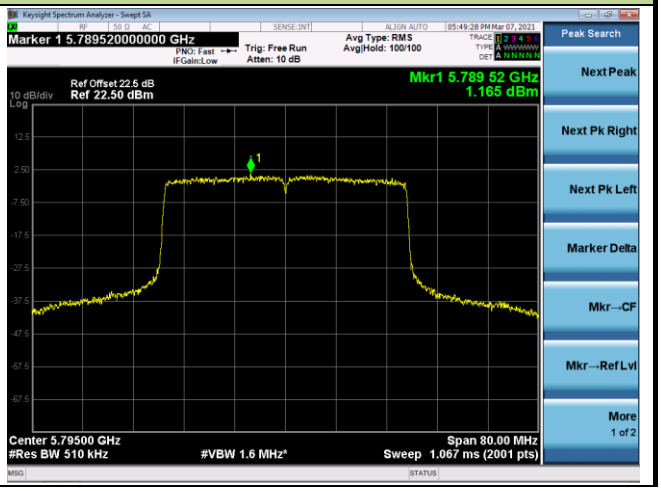
802.11ax-HE40 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 134 (5670MHz)	Channel 142 (5710MHz)
	
Channel 151 (5755MHz)	Channel 159 (5795MHz)
	


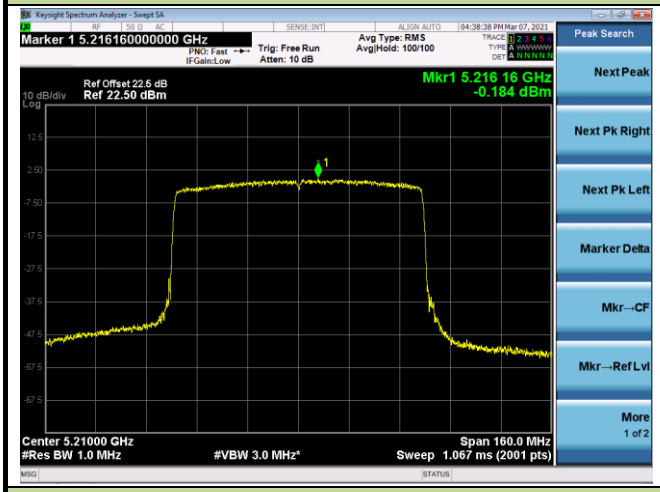
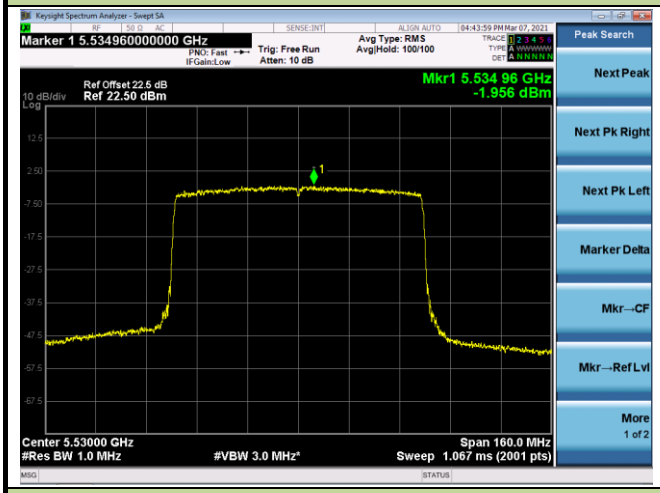
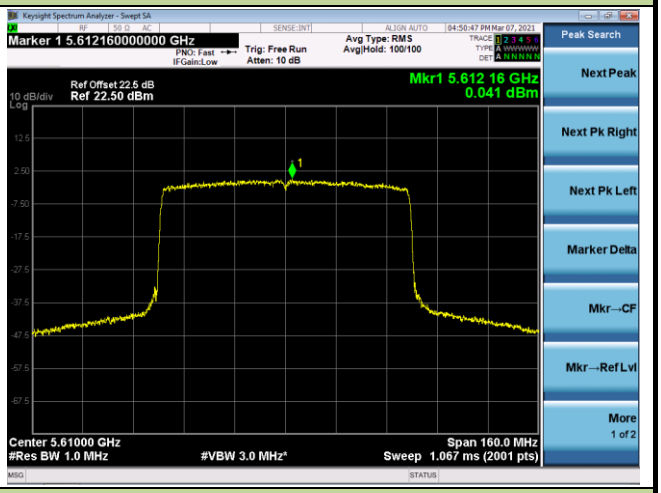
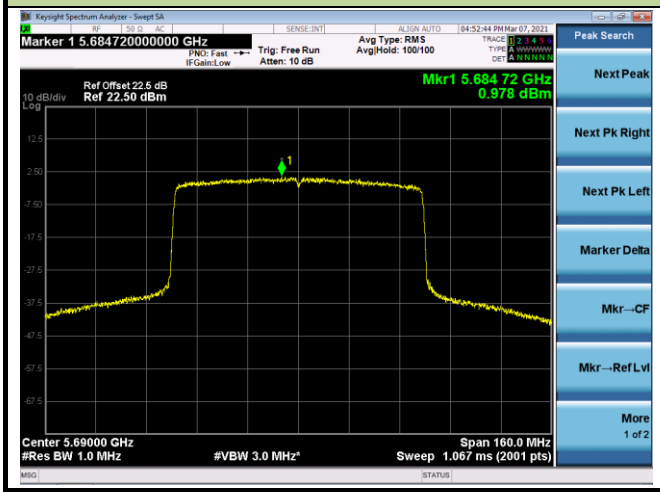
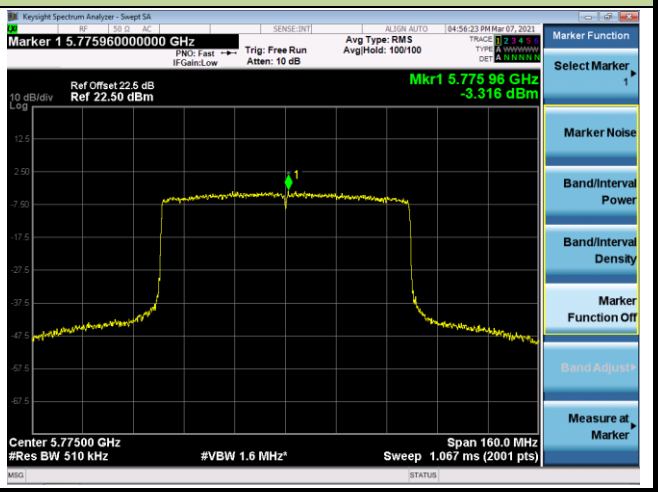
802.11ax-HE80 Power Spectral Density – Ant 0 / Ant 0 + 1	
Channel 42 (5210MHz)	Channel 58 (5290MHz)
	
Channel 106 (5530MHz)	Channel 122 (5610MHz)
	
Channel 138 (5690MHz)	Channel 155 (5775MHz)
	

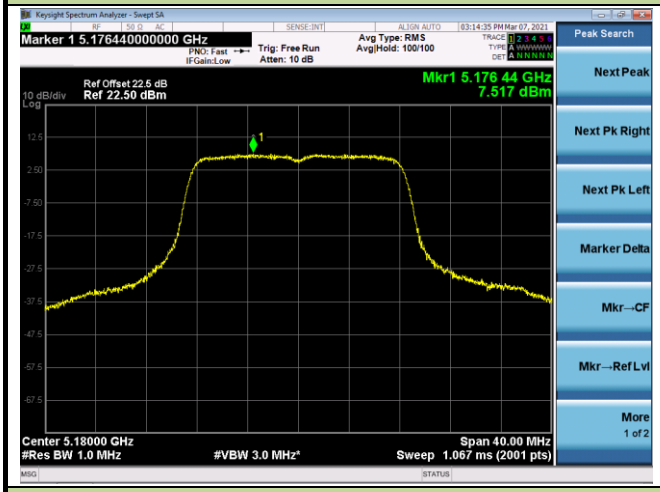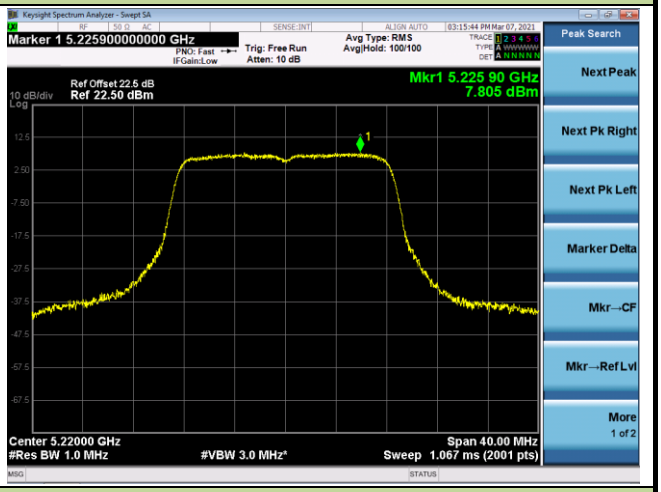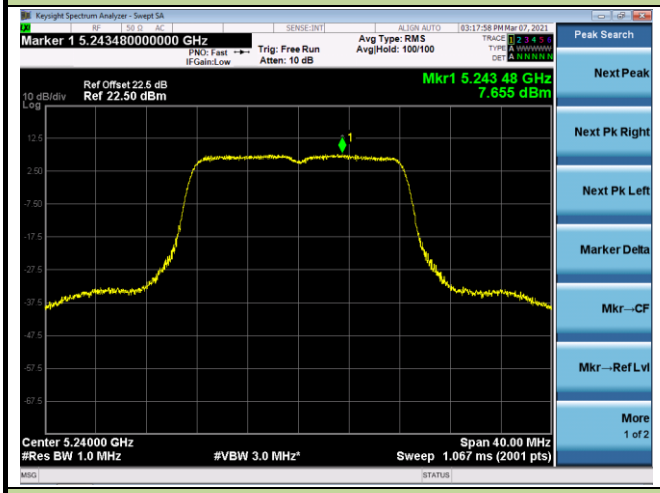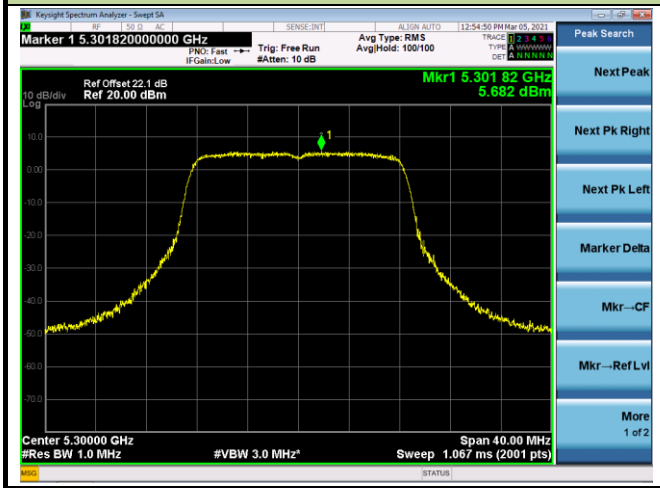
802.11a Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 36 (5180MHz)	Channel 44 (5220MHz)
	
Channel 48 (5240MHz)	Channel 52 (5260MHz)
	
Channel 60 (5300MHz)	Channel 64 (5320MHz)
	

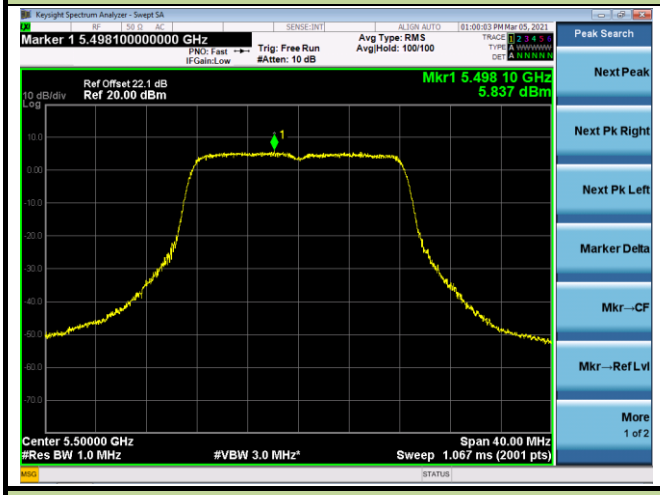
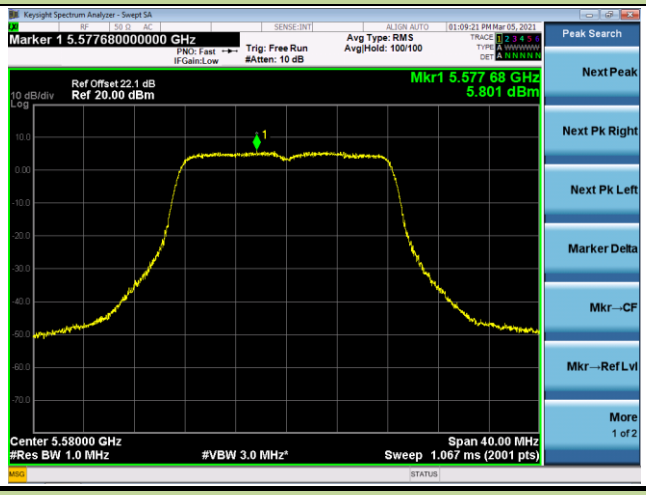
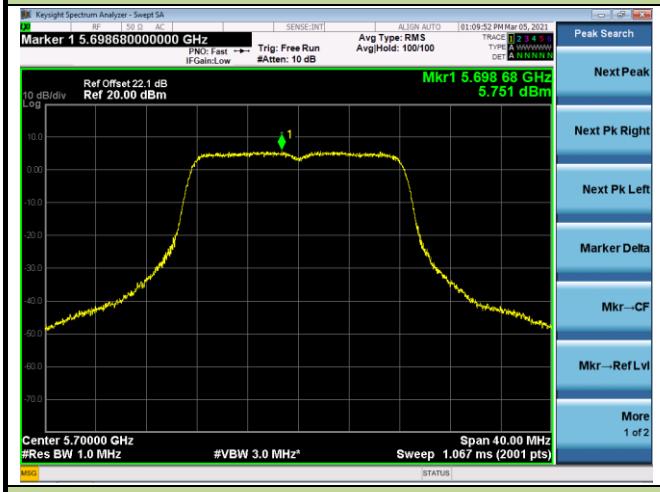
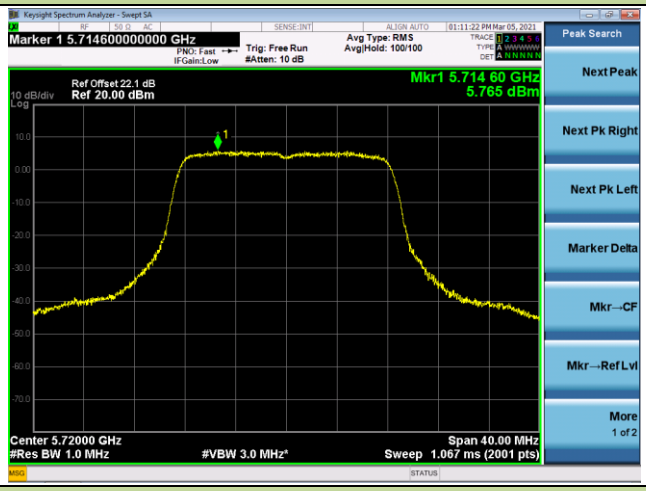
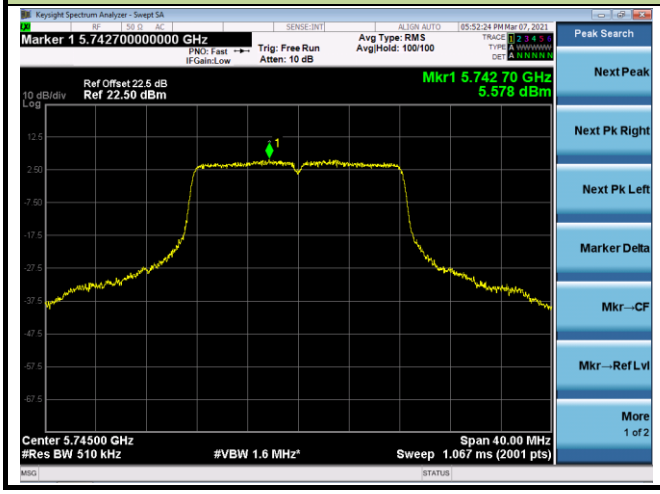
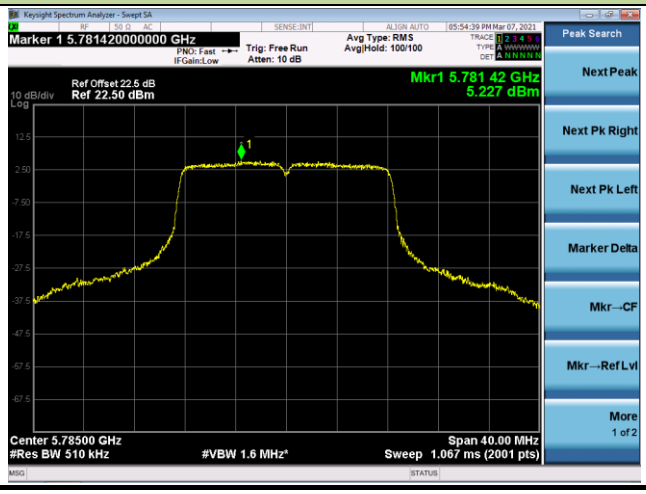
802.11a Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 100 (5500MHz)	Channel 116 (5580MHz)
	
Channel 140 (5700MHz)	Channel 144 (5720MHz)
	
Channel 149 (5745MHz)	Channel 157 (5785MHz)
	




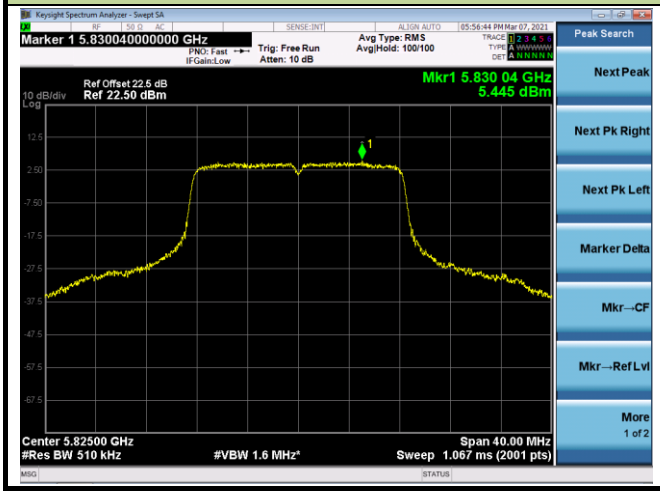
802.11a Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 165 (5825MHz)	
	


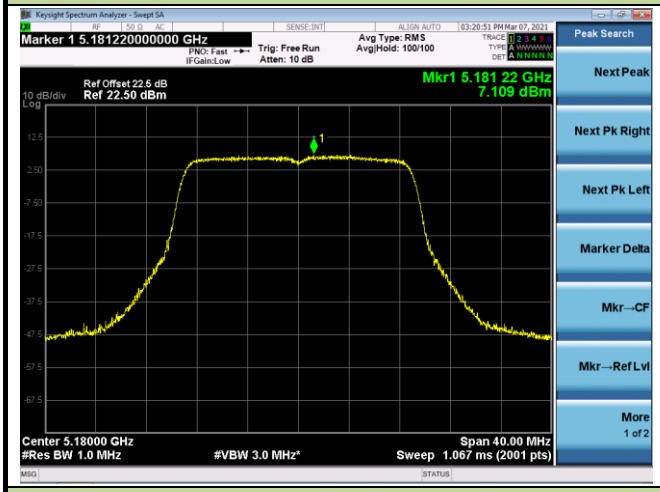
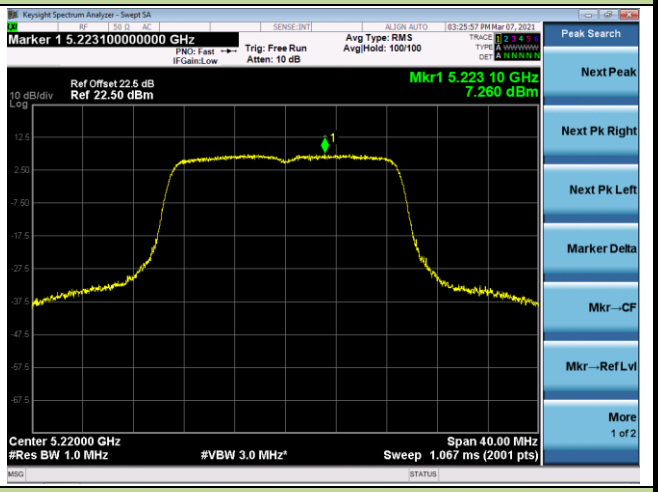
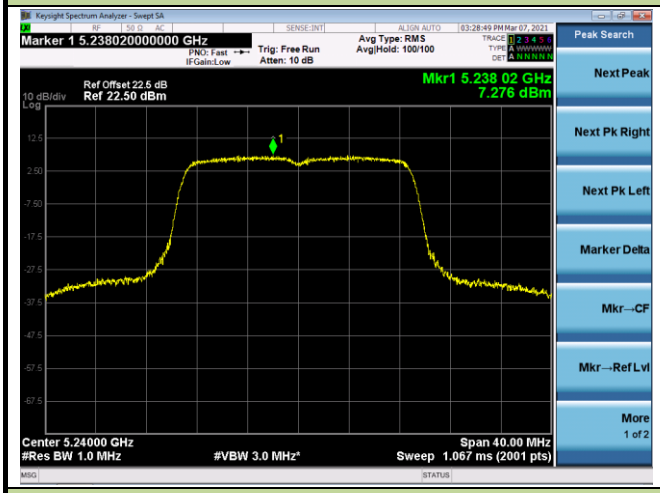
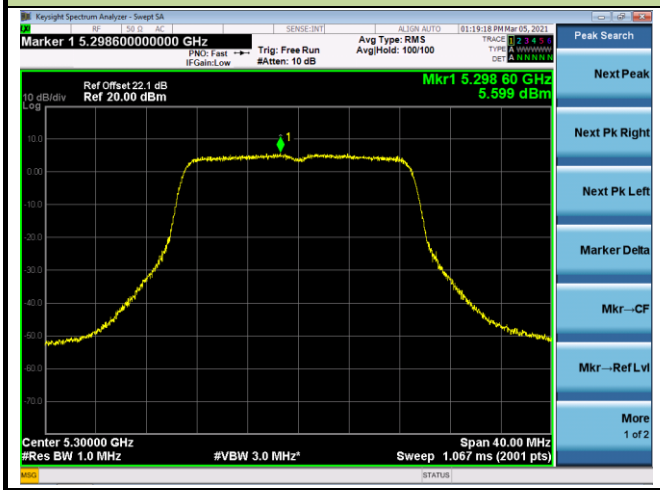
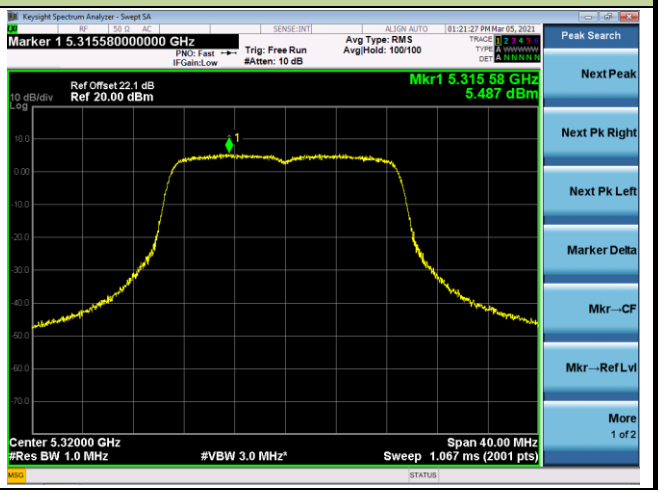
802.11ac-VHT20 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 36 (5180MHz)	Channel 44 (5220MHz)
	
Channel 48 (5240MHz)	Channel 52 (5260MHz)
	
Channel 60 (5300MHz)	Channel 64 (5320MHz)
	

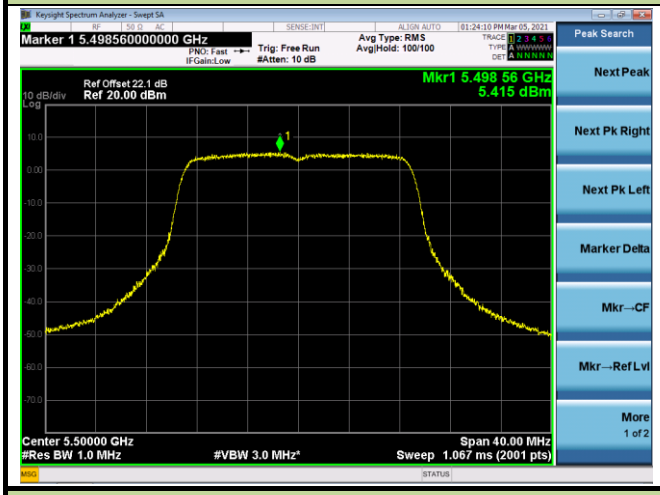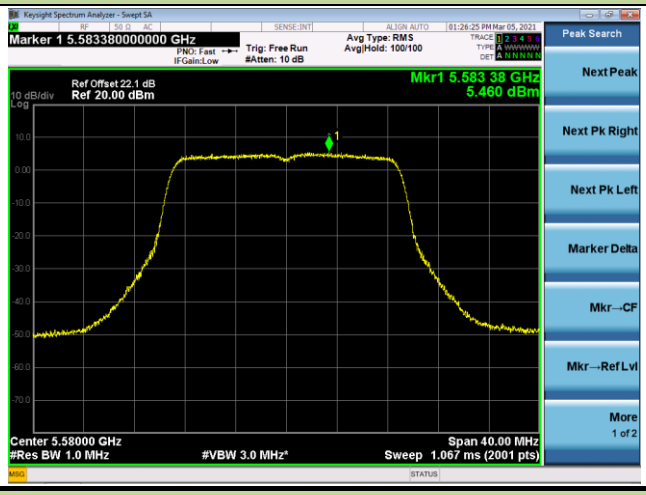
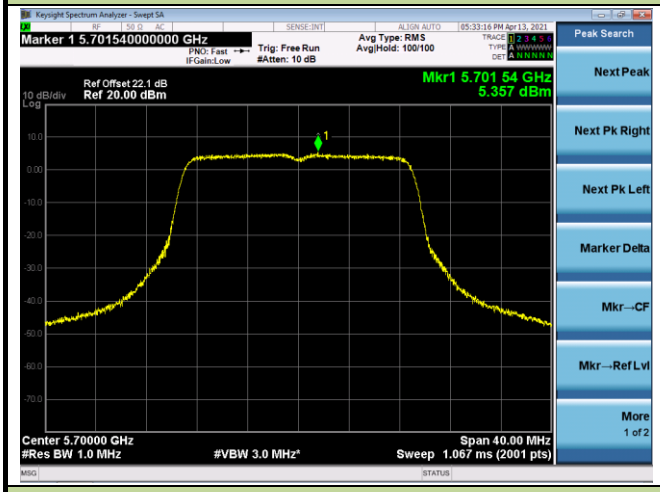
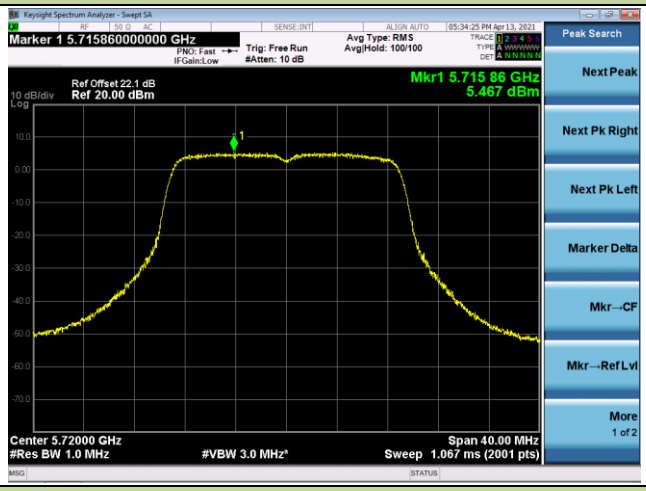
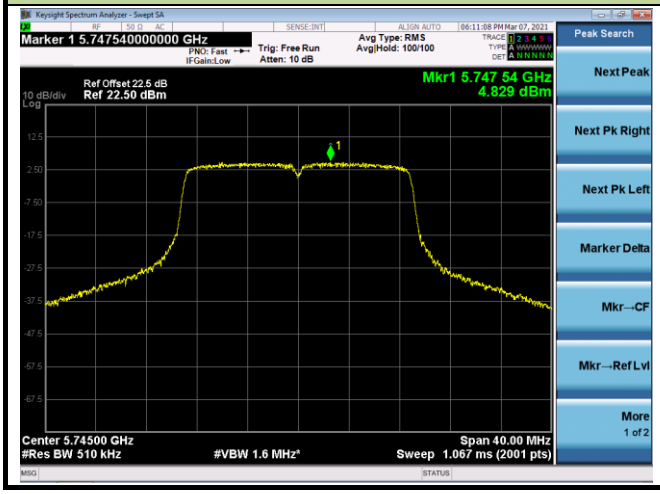
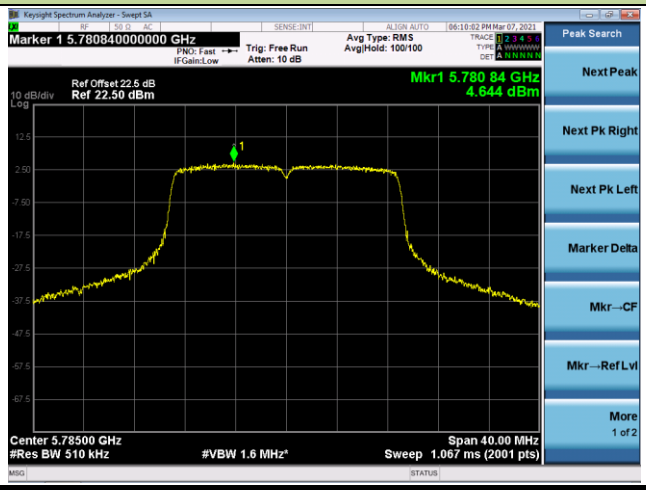
802.11ac-VHT20 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 100 (5500MHz)	Channel 116 (5580MHz)
	
Channel 140 (5700MHz)	Channel 144 (5720MHz)
	
Channel 149 (5745MHz)	Channel 157 (5785MHz)
	





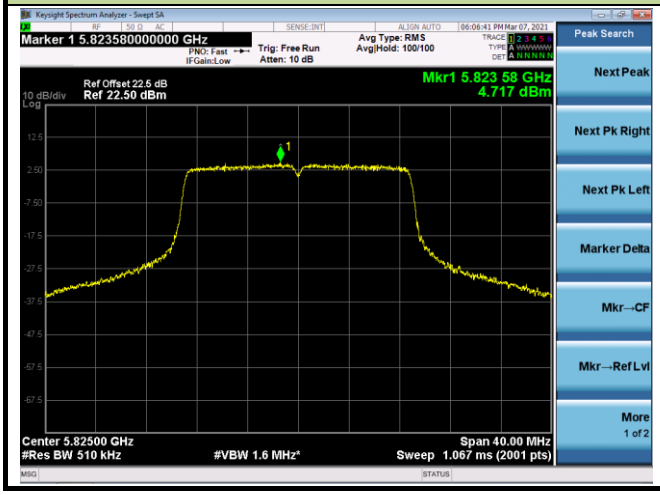
802.11ac-VHT20 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 165 (5825MHz)	
	

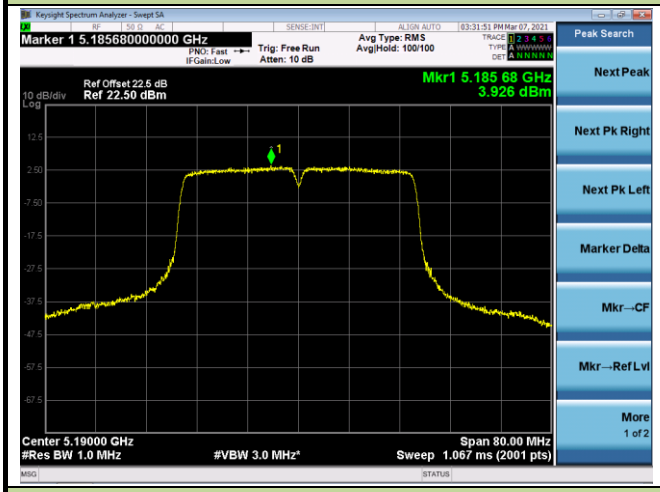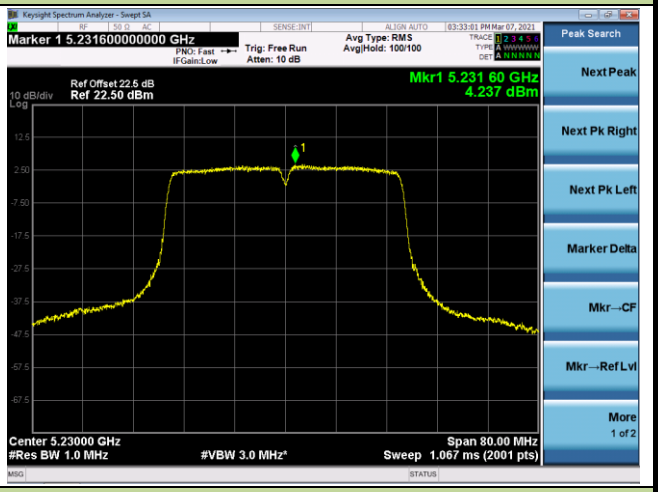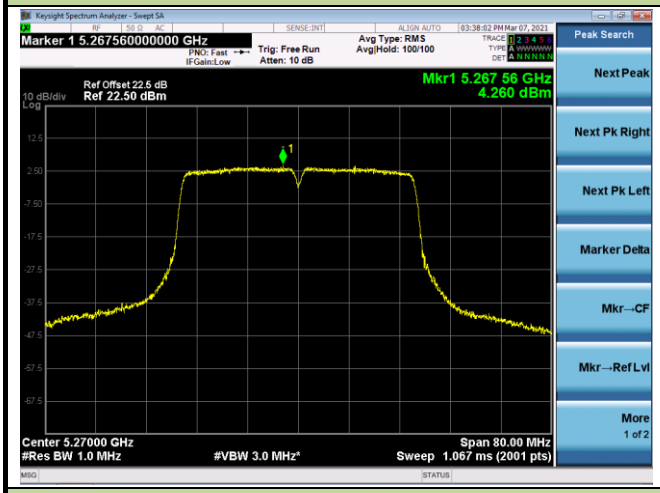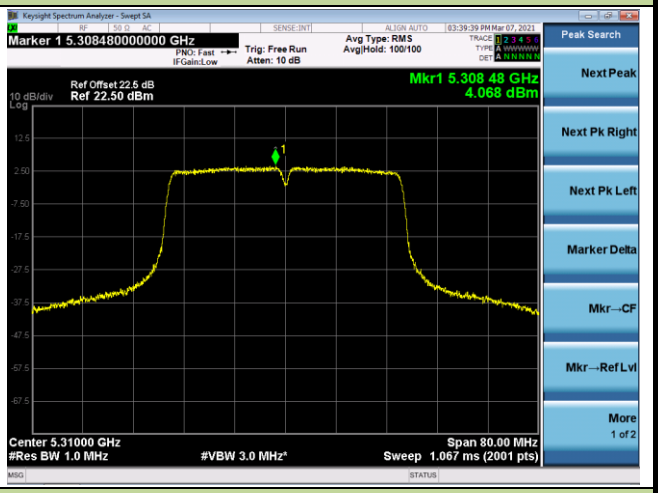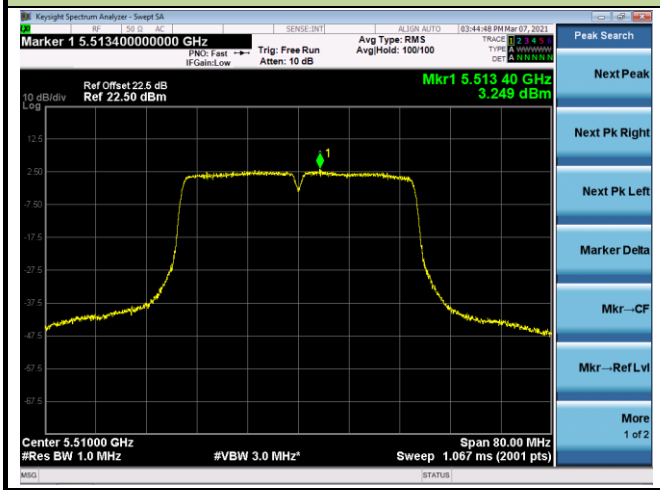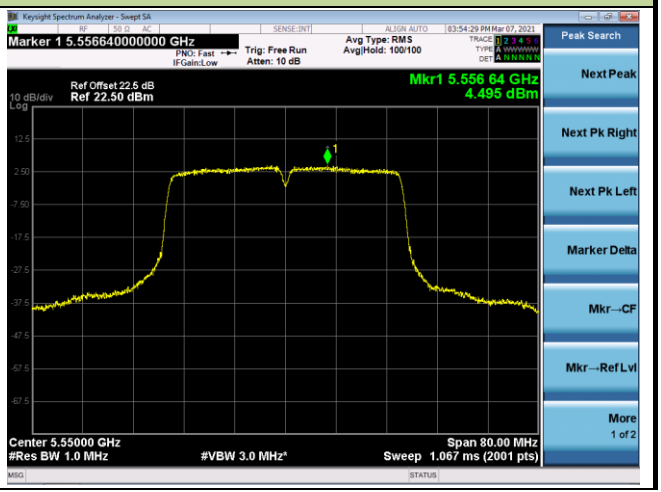
802.11ac-VHT40 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 38 (5190MHz)	Channel 46 (5230MHz)
	
Channel 54 (5270MHz)	Channel 62 (5310MHz)
	
Channel 102 (5510MHz)	Channel 110 (5550MHz)
	



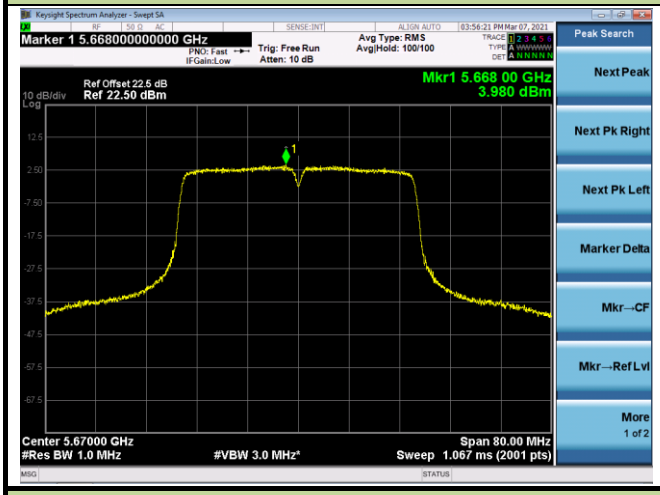
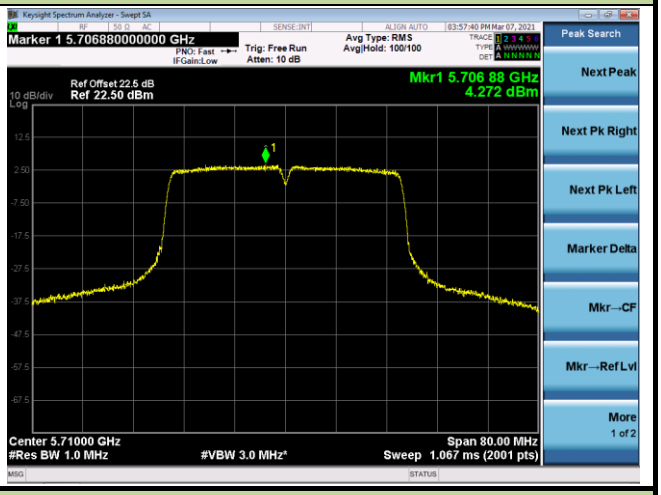
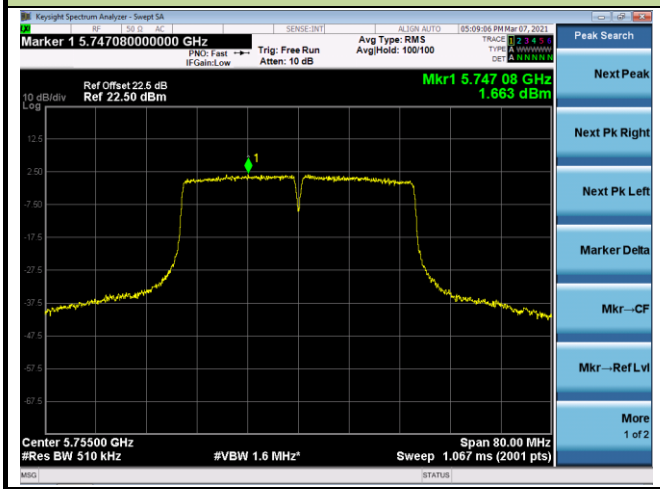
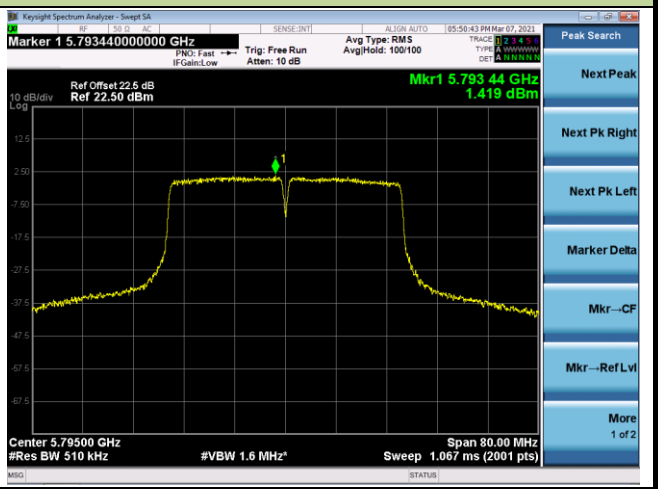
802.11ac-VHT40 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 134 (5670MHz)	Channel 142 (5710MHz)
	
Channel 151 (5755MHz)	Channel 159 (5795MHz)
	

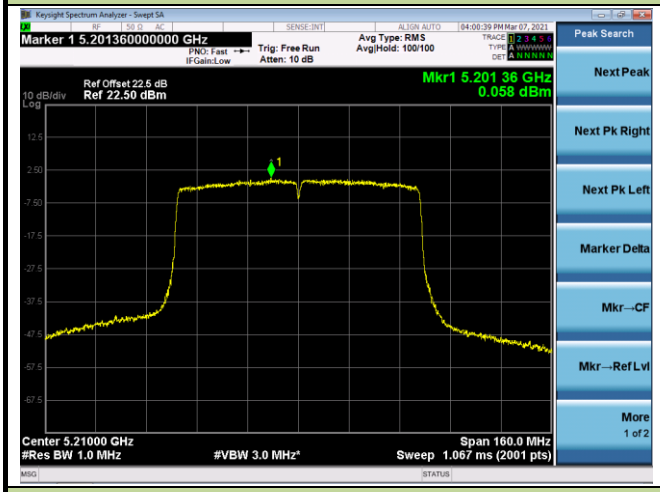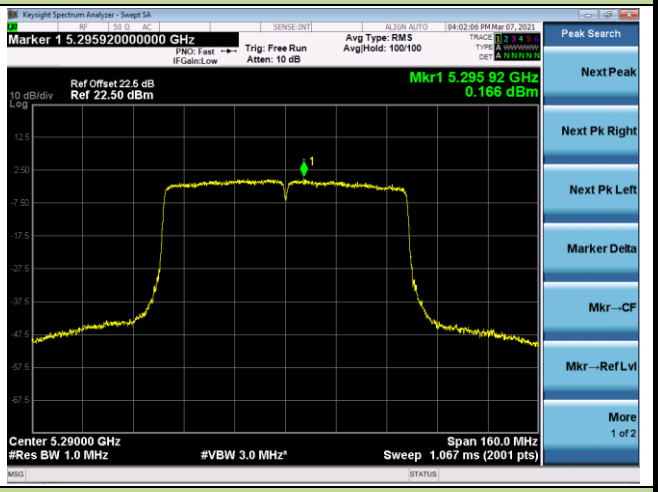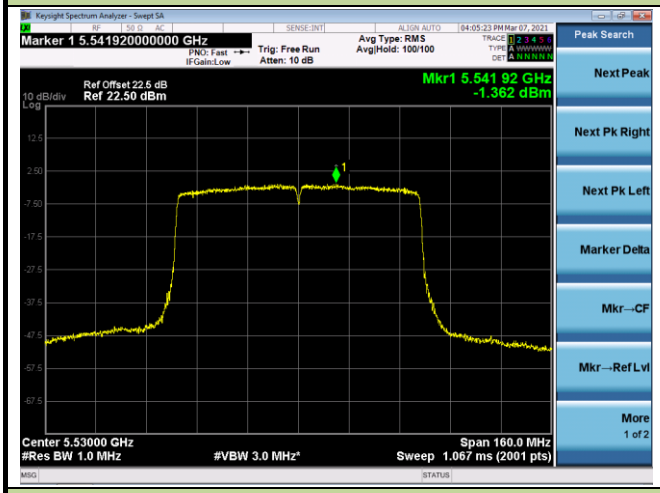
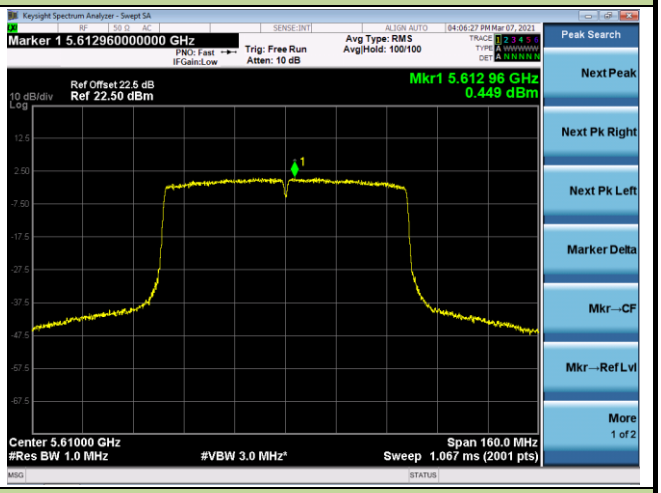
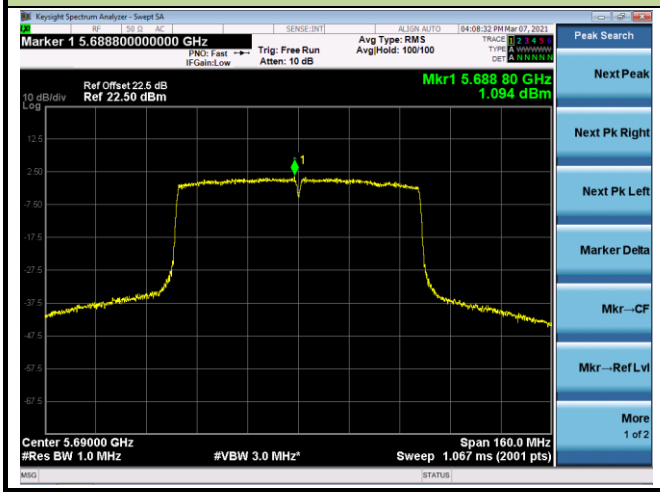
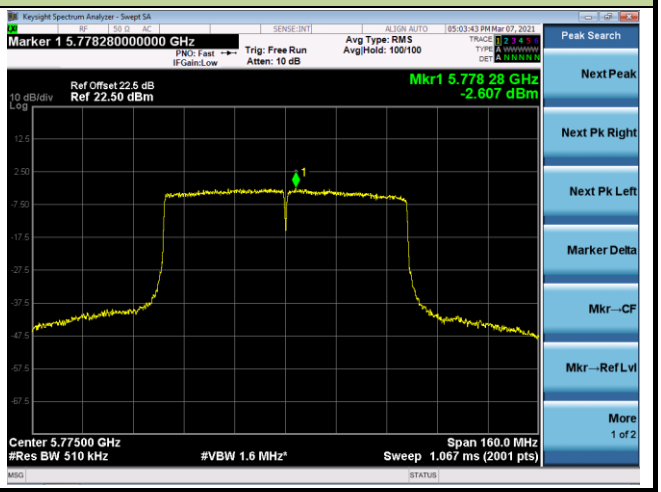
802.11ac-VHT80 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 42 (5210MHz)	Channel 58 (5290MHz)
	
Channel 106 (5530MHz)	Channel 122 (5610MHz)
	
Channel 138 (5690MHz)	Channel 155 (5775MHz)
	


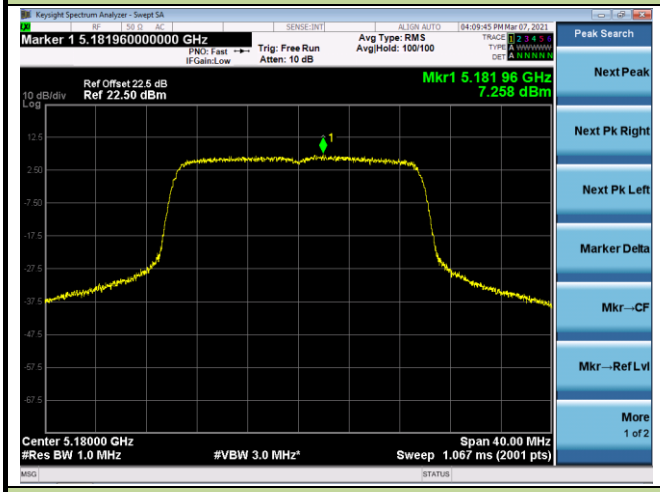
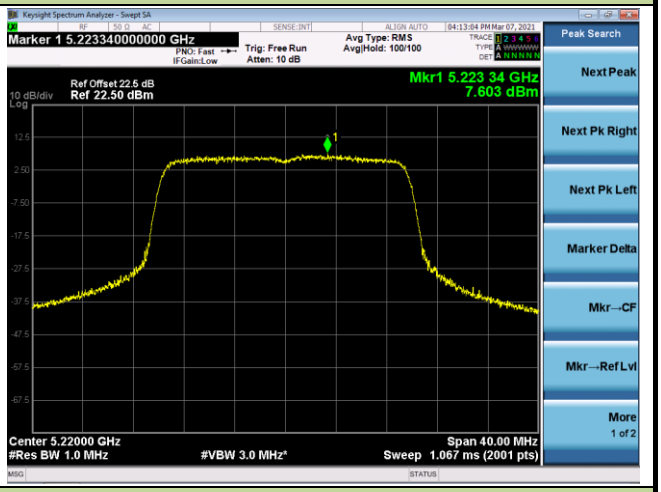
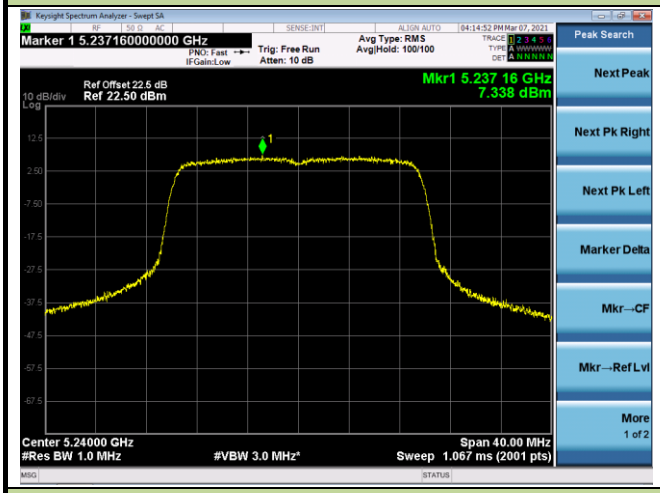
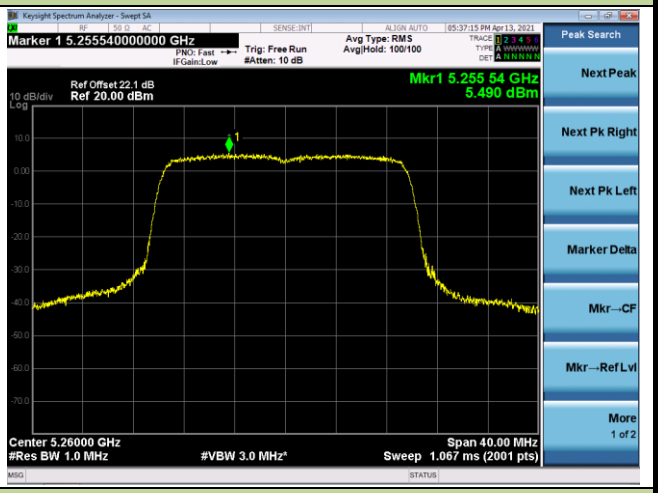
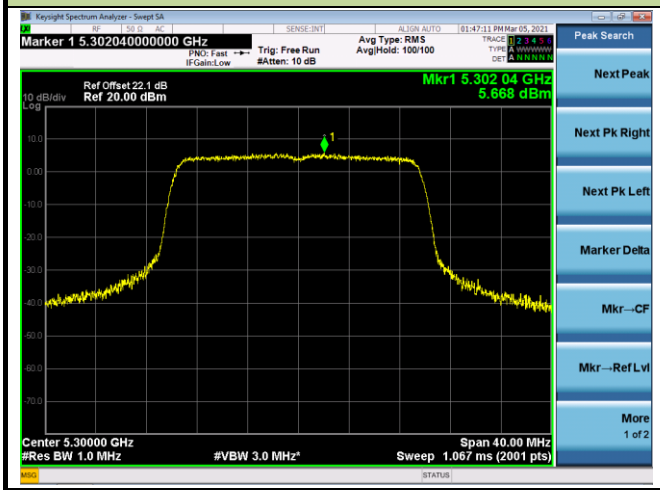
802.11ax-HE20 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 36 (5180MHz)	Channel 44 (5220MHz)
	
Channel 48 (5240MHz)	Channel 52 (5260MHz)
	
Channel 60 (5300MHz)	Channel 64 (5320MHz)
	

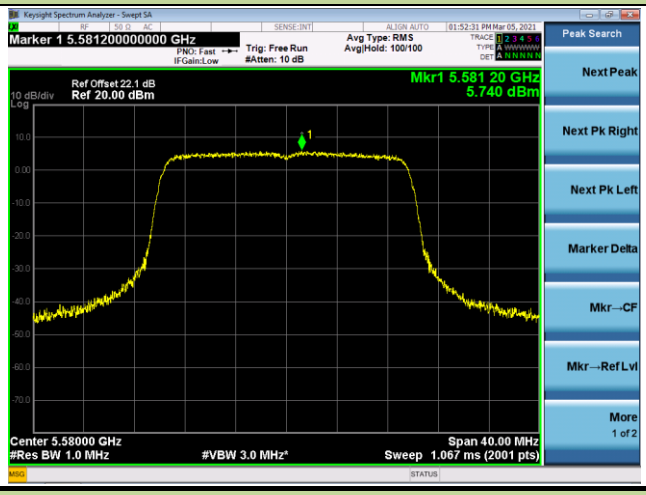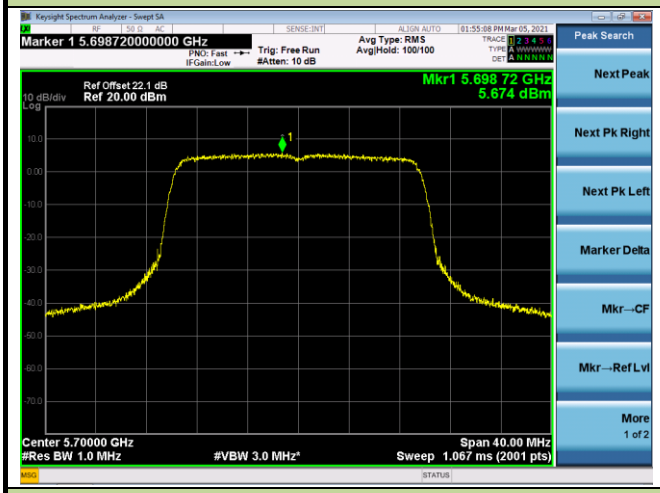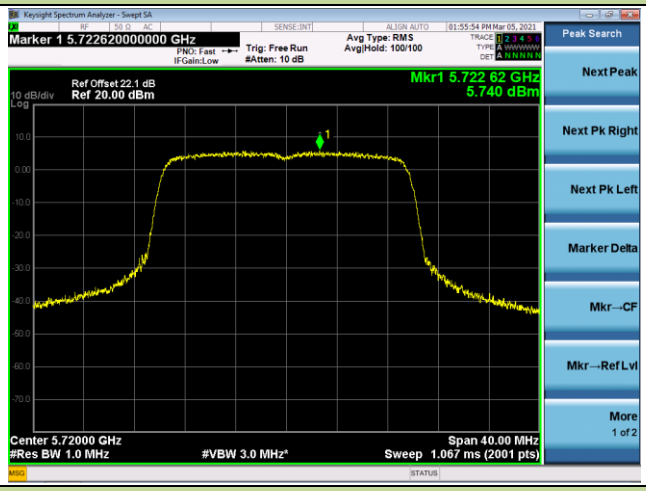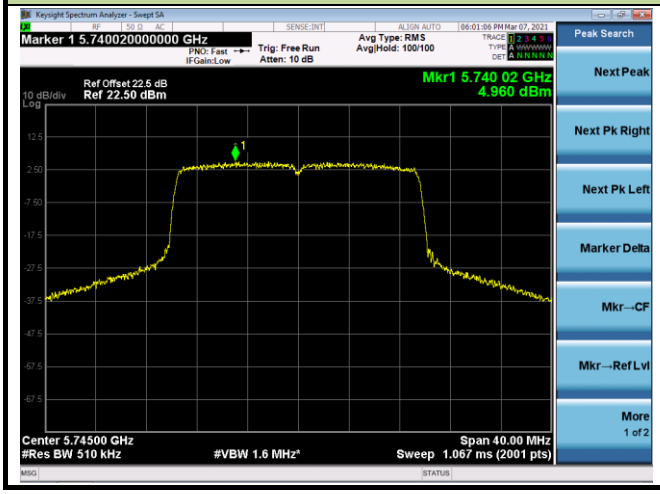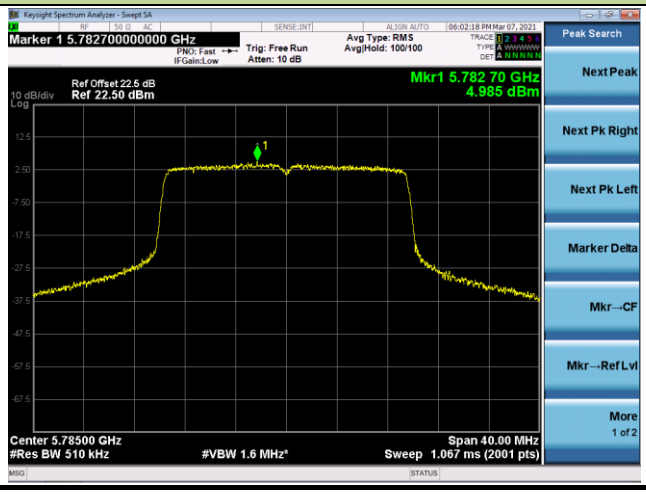802.11ax-HE20 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 100 (5500MHz)	Channel 116 (5580MHz)
	
Channel 140 (5700MHz)	Channel 144 (5720MHz)
	
Channel 149 (5745MHz)	Channel 157 (5785MHz)
	

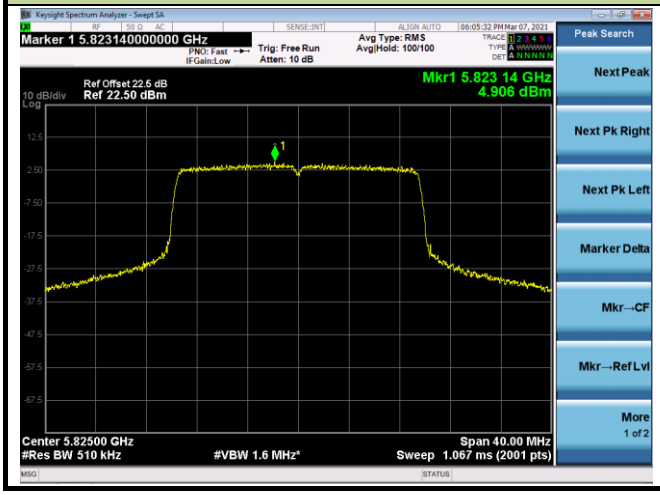802.11ax-HE20 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 165 (5825MHz)	
	

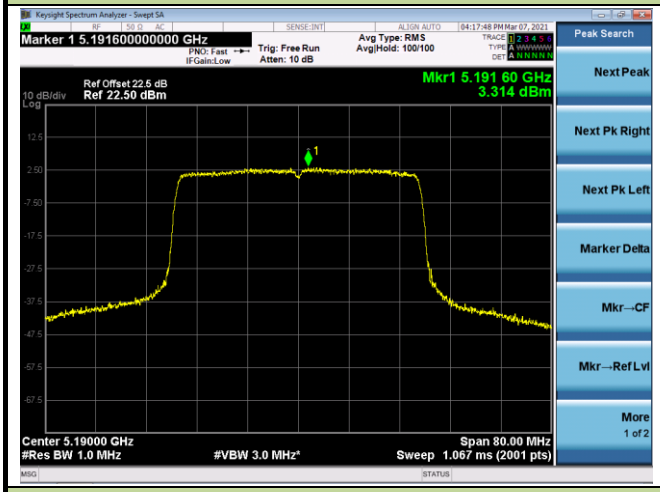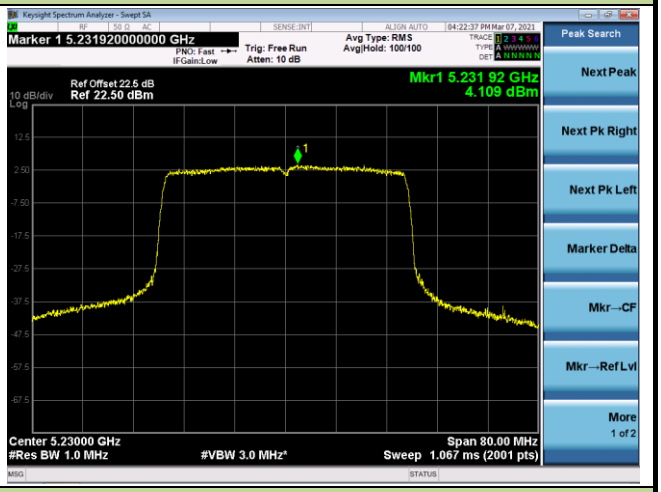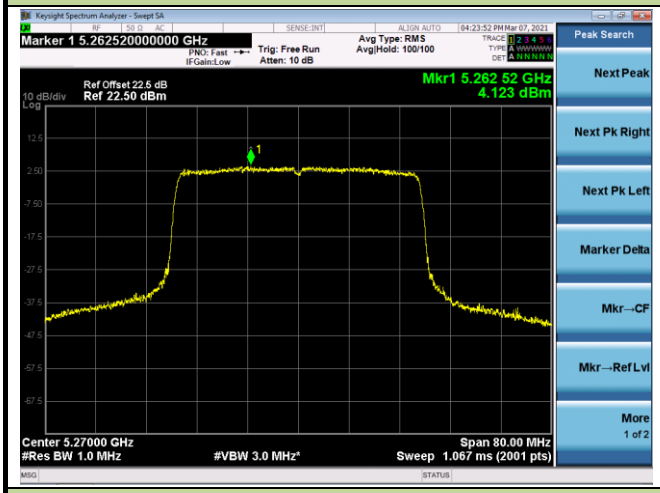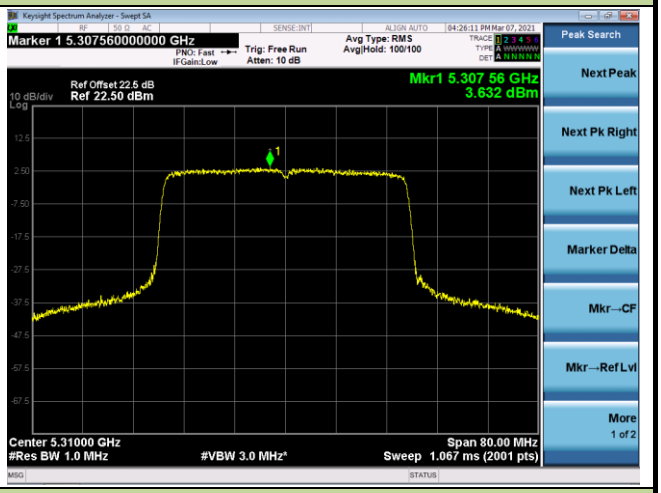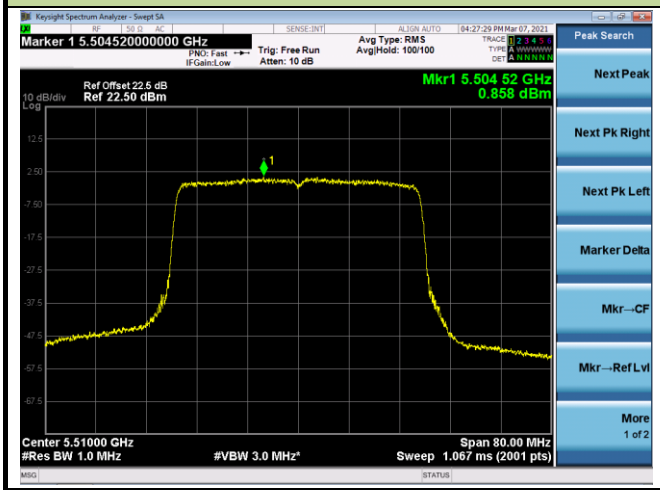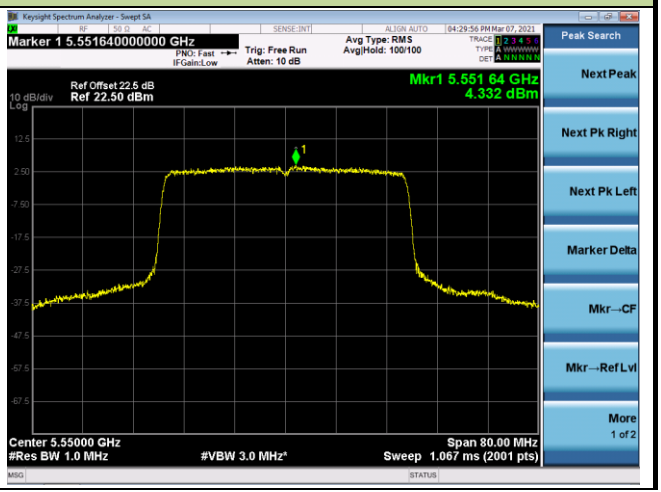802.11ax-HE40 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 38 (5190MHz)	Channel 46 (5230MHz)
	
Channel 54 (5270MHz)	Channel 62 (5310MHz)
	
Channel 102 (5510MHz)	Channel 110 (5550MHz)
	

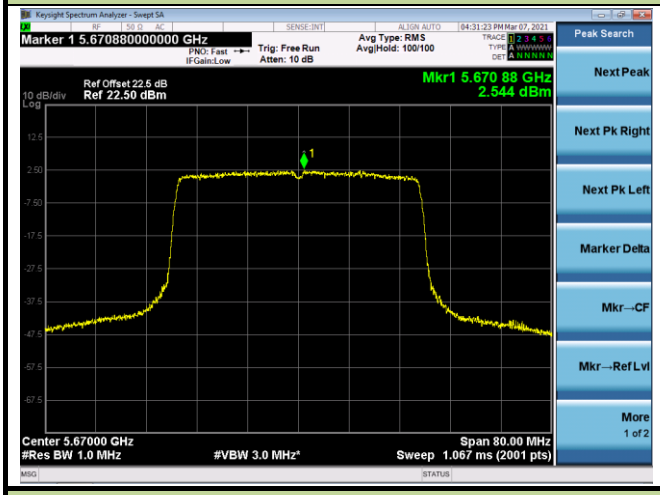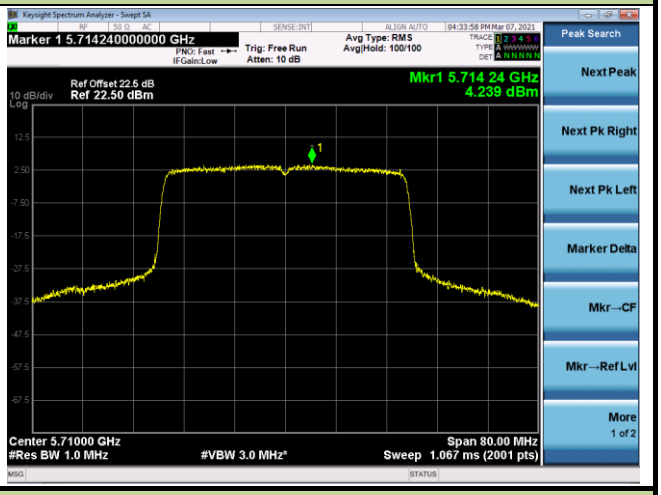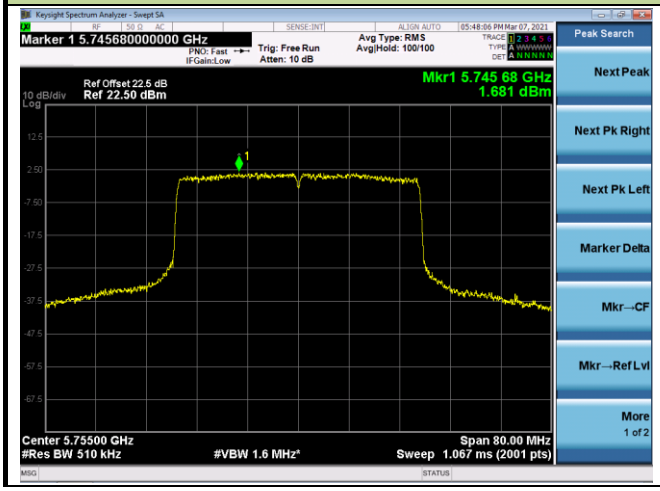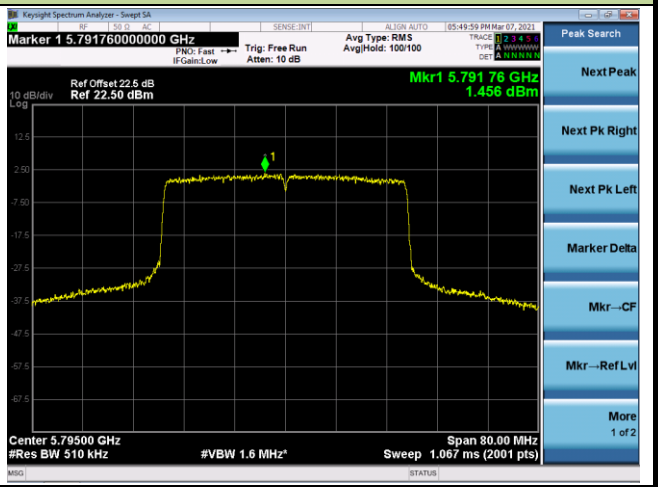802.11ax-HE40 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 134 (5670MHz)	Channel 142 (5710MHz)
	
Channel 151 (5755MHz)	Channel 159 (5795MHz)
	

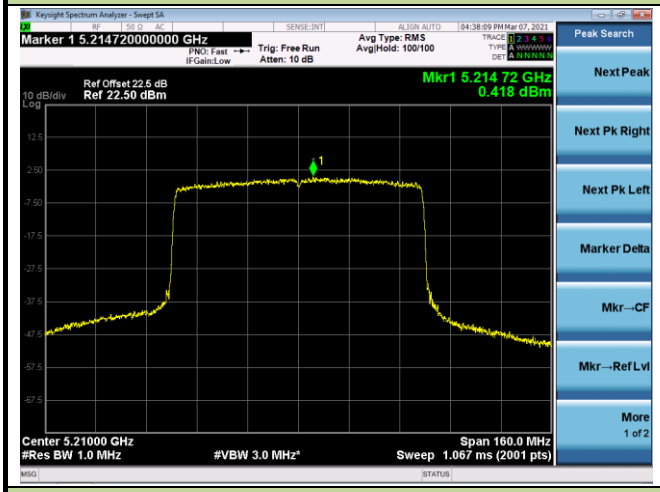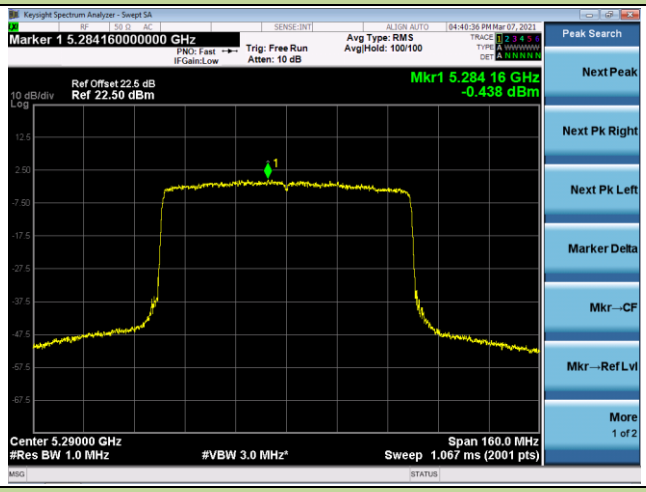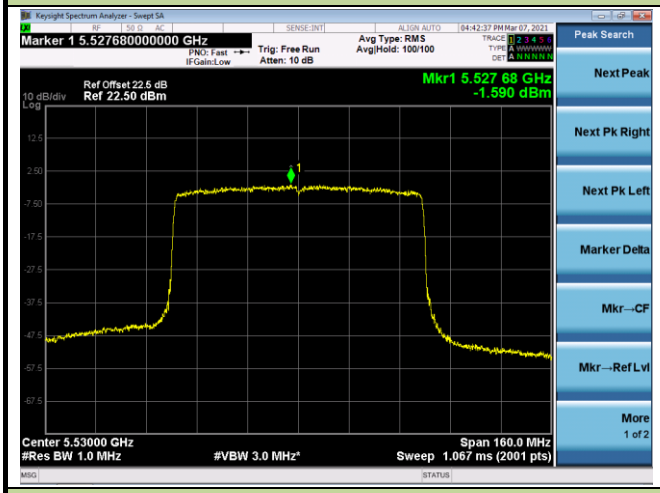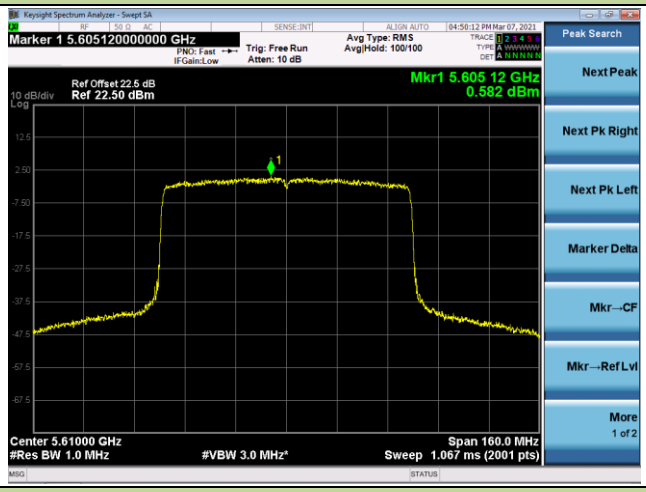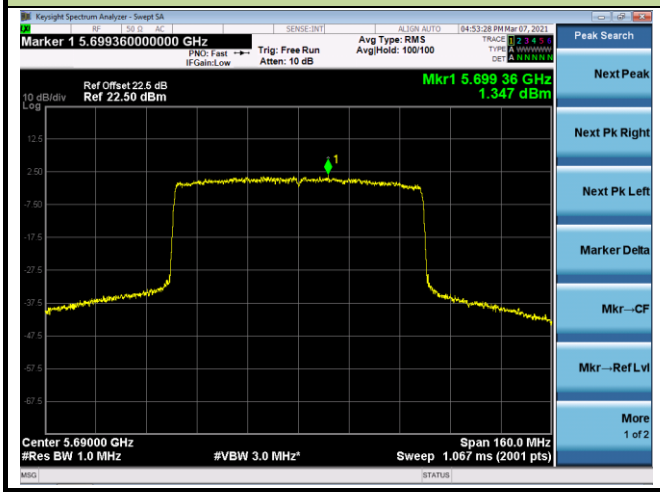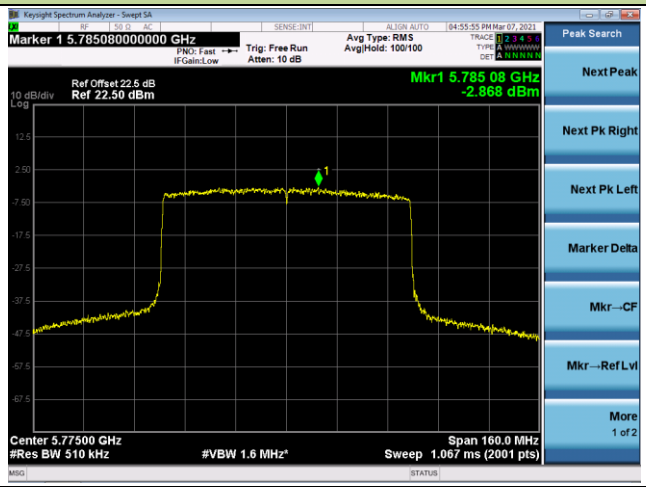802.11ax-HE80 Power Spectral Density – Ant 1 / Ant 0 + 1	
Channel 42 (5210MHz)	Channel 58 (5290MHz)
	
Channel 106 (5530MHz)	Channel 122 (5610MHz)
	
Channel 138 (5690MHz)	Channel 155 (5775MHz)
	

The End