

802.11ax-HE20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1 + 2 + 3

Channel 01 (2412MHz)

100kHz PSD reference Level



Low Band Edge



Spurious Emission



Channel 06 (2437MHz)

100kHz PSD reference Level



Spurious Emission



802.11ax-HE20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1 + 2 + 3

Channel 11 (2462MHz)

100kHz PSD reference Level



High Band Edge



Spurious Emission



802.11ax-HE40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1 + 2 + 3

Channel 03 (2422MHz)

100kHz PSD reference Level



Low Band Edge



Spurious Emission



Channel 06 (2437MHz)

100kHz PSD reference Level



Spurious Emission



802.11ax-HE40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1 + 2 + 3

Channel 09 (2452MHz)

100kHz PSD reference Level



High Band Edge



Spurious Emission



5.6. 開放頻帶邊緣之不必要幅射要求

5.6.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.5 節，使用頻帶範圍外之任意 100 千赫 (kHz) 內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz) 內的射頻功率，衰減值限制如下：

(1) 輸出功率以低功率射頻電機技術規範附件二之峰值輸出功率方式量測者，至少須衰減 20 dB，可使用射頻傳導或輻射方式測量。

(2) 輸出功率以低功率射頻電機技術規範 3.10.1(2)(2.3) 之最大傳導輸出功率量測方式者，至少須衰減 30 dB。

此外，落於第 2.7 節禁用頻段之輻射發射，應符合第 2.8 節之規定(限制要求如下)：

發射依據國家通訊傳播委員會低功率射頻電機技術規範之第 2.8 節，低功率射頻電機，除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。各頻段重疊處，以較嚴格之限制值為準。


頻 率(兆赫)	電場強度(微伏/公尺)	測距(公尺)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含) - 216 (含)	150	3
216 (不含) - 960 (含)	200	3
960 (不含)以上	500	3

上表規定之電場強度，頻率在 9-90kHz 千赫(kHz)、110-490 千赫(kHz)以及 1000 兆赫(MHz)以上之發射，其量測以平均值檢波器為基準，且須符合第 5.14 節之規定；其他頻率之發射，應以 CISPR 準峰值(quasi-peak) 檢波器測量；非以上表所指定之距離測量時須符合第 5.5 節之規定，而輻射發射之量測頻率範圍須符合第 5.12 節之規定。

5.6.2. 量測方法

待測物置於高 80 公分之非導體桌面（落地型產品置於地上），受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。


5.6.3. 測試架構圖

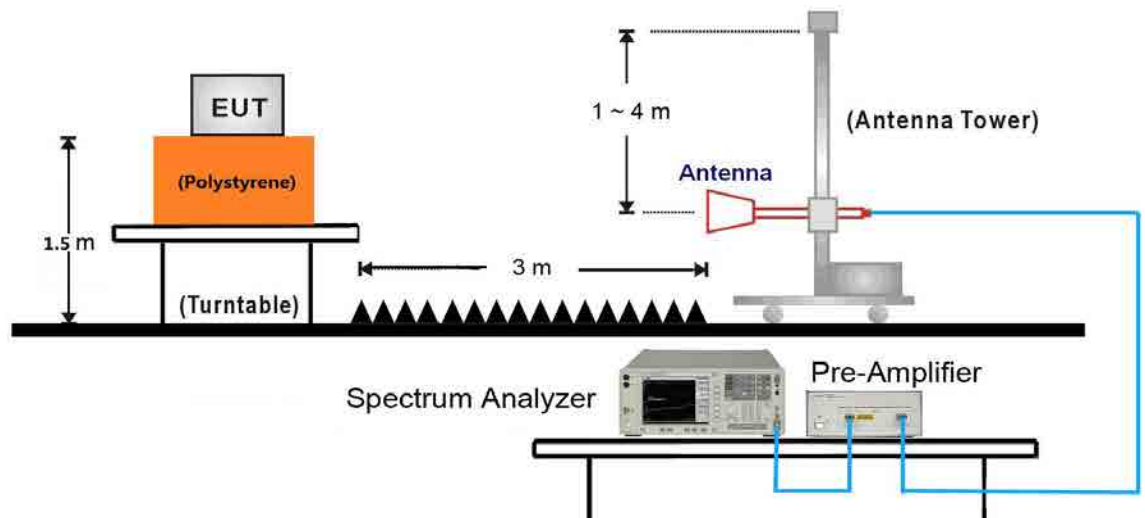

備註：使用頻率範圍外之任意 100 千赫雜訊，使用輻射方式測量，6 dB 頻寬使用 1MHz 遠大於 100kHz 仍可 PASS，檢附其測試數據。

5.6.4. 測試結果

Site: AC1	Time: 2018/11/23 - 23:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2412MHz (CDD Mode)	

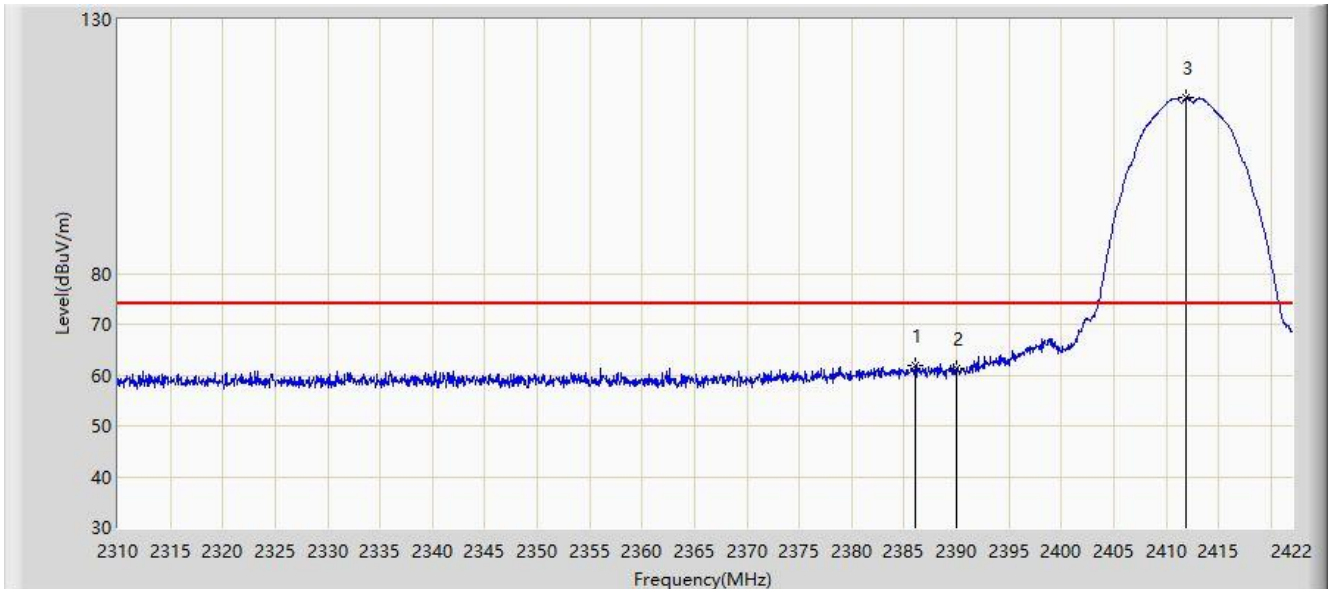


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.048	61.954	29.394	-12.046	74.000	32.560	PK
2			2390.000	61.258	28.704	-12.742	74.000	32.554	PK
3		*	2411.920	114.630	82.104	N/A	N/A	32.526	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2412MHz (CDD Mode)	

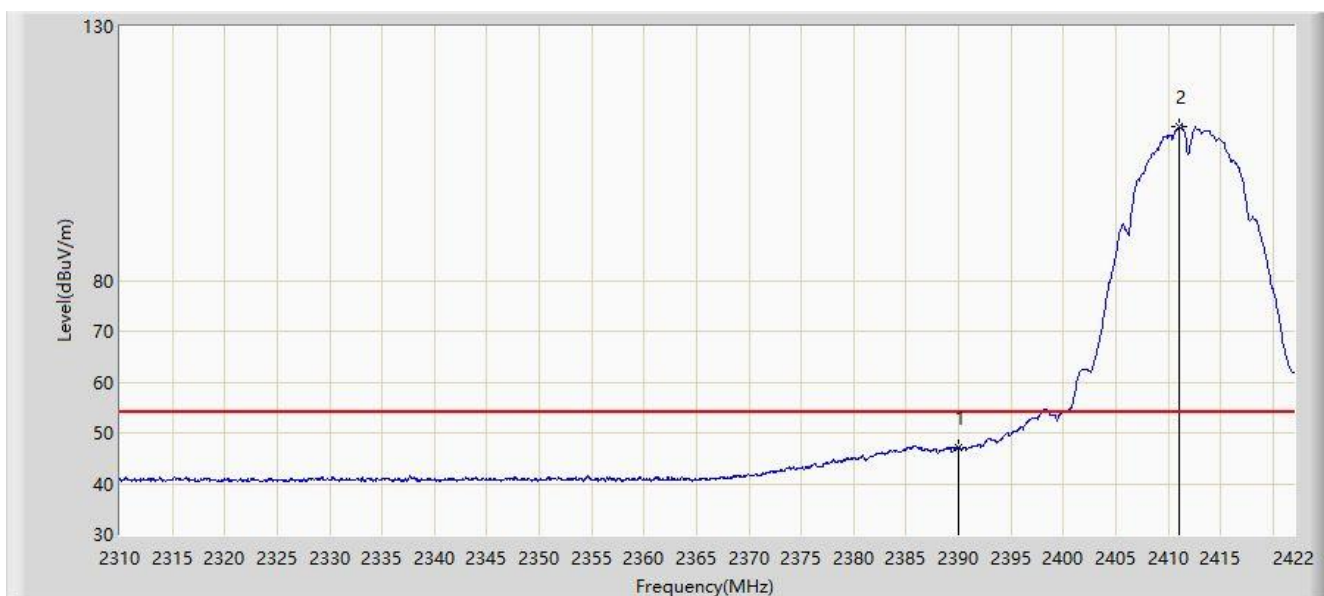


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.070	14.516	-6.930	54.000	32.554	AV
2		*	2411.080	110.346	77.819	N/A	N/A	32.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 22:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2412MHz (CDD Mode)	

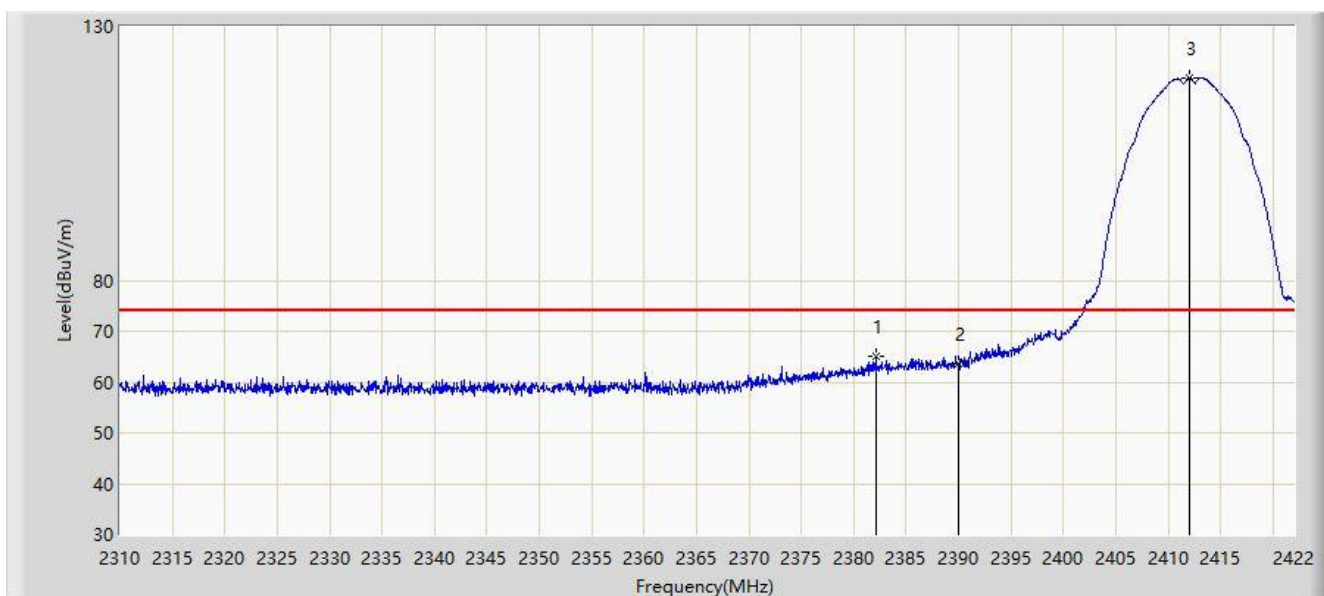


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.128	65.096	32.531	-8.904	74.000	32.565	PK
2			2390.000	63.540	30.986	-10.460	74.000	32.554	PK
3		*	2411.976	119.842	87.316	N/A	N/A	32.526	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2412MHz (CDD Mode)	

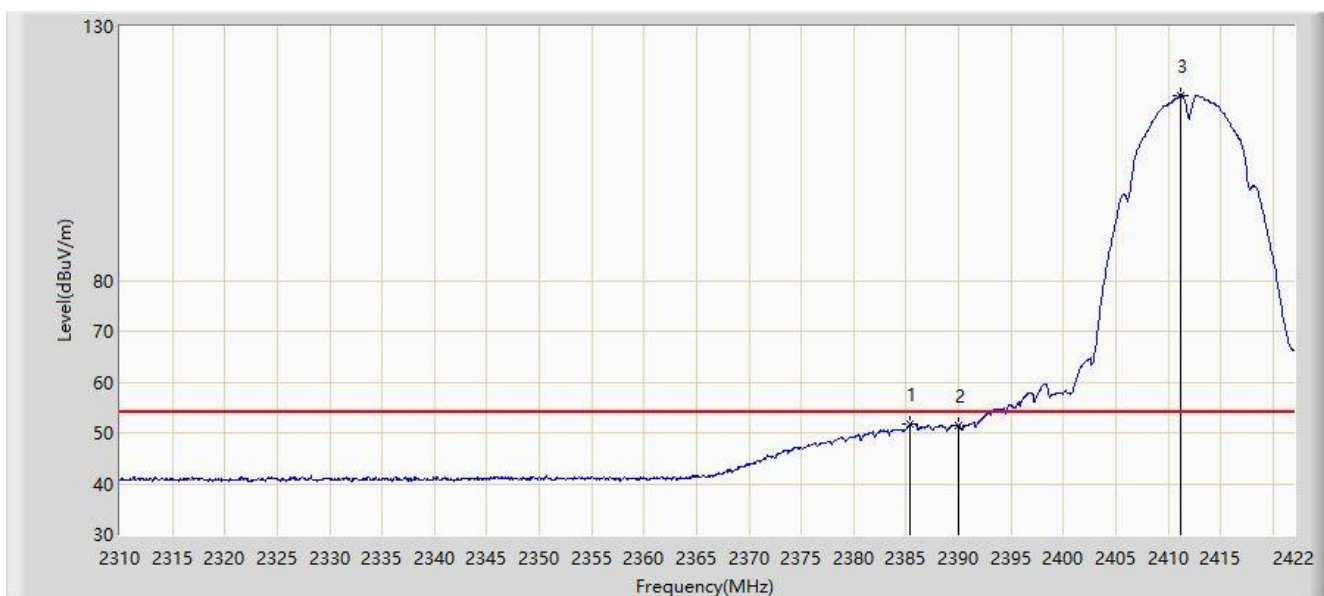


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.432	51.632	19.071	-2.368	54.000	32.561	AV
2			2390.000	51.436	18.882	-2.564	54.000	32.554	AV
3		*	2411.136	116.517	83.990	N/A	N/A	32.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2417MHz (CDD Mode)	

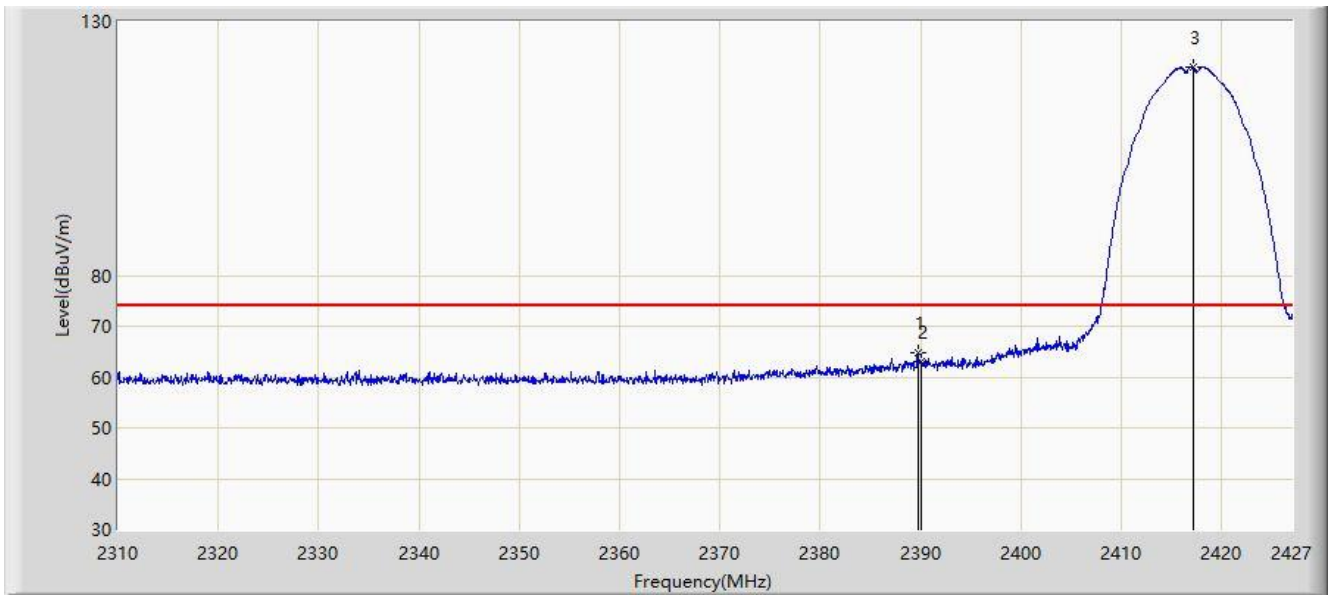


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.736	64.880	32.325	-9.120	74.000	32.555	PK
2			2390.000	62.961	30.407	-11.039	74.000	32.554	PK
3		*	2417.114	120.987	88.468	N/A	N/A	32.519	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2417MHz (CDD Mode)	

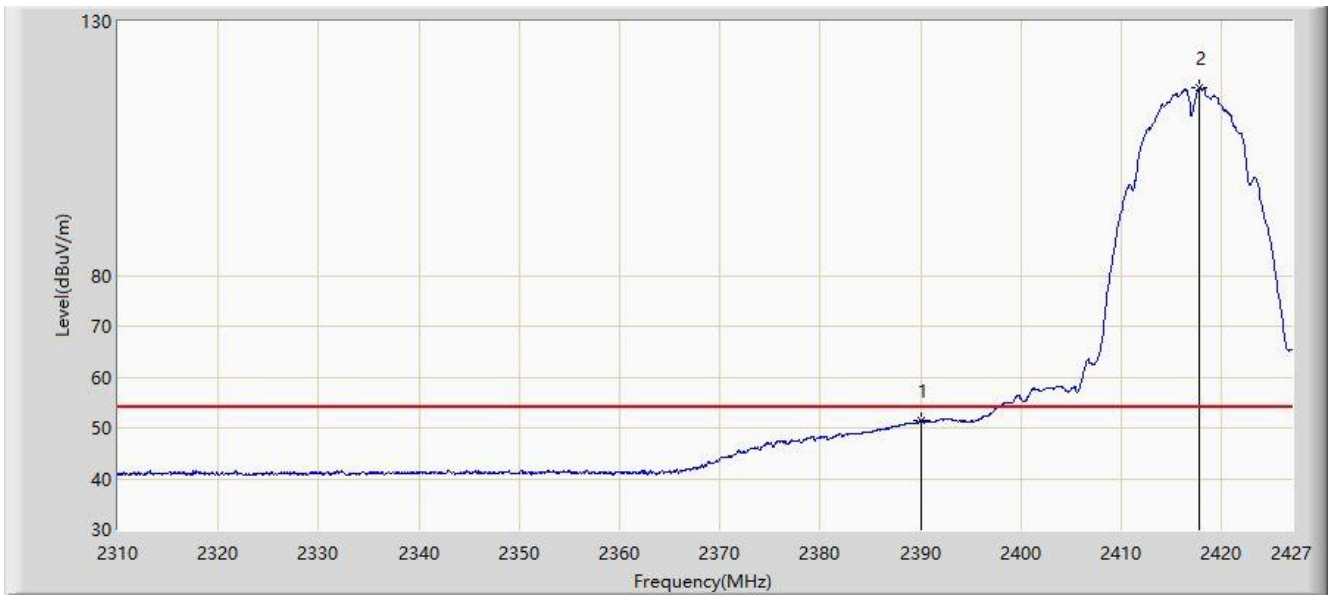


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.406	18.852	-2.594	54.000	32.554	AV
2		*	2417.815	116.853	84.334	N/A	N/A	32.519	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2417MHz (CDD Mode)	

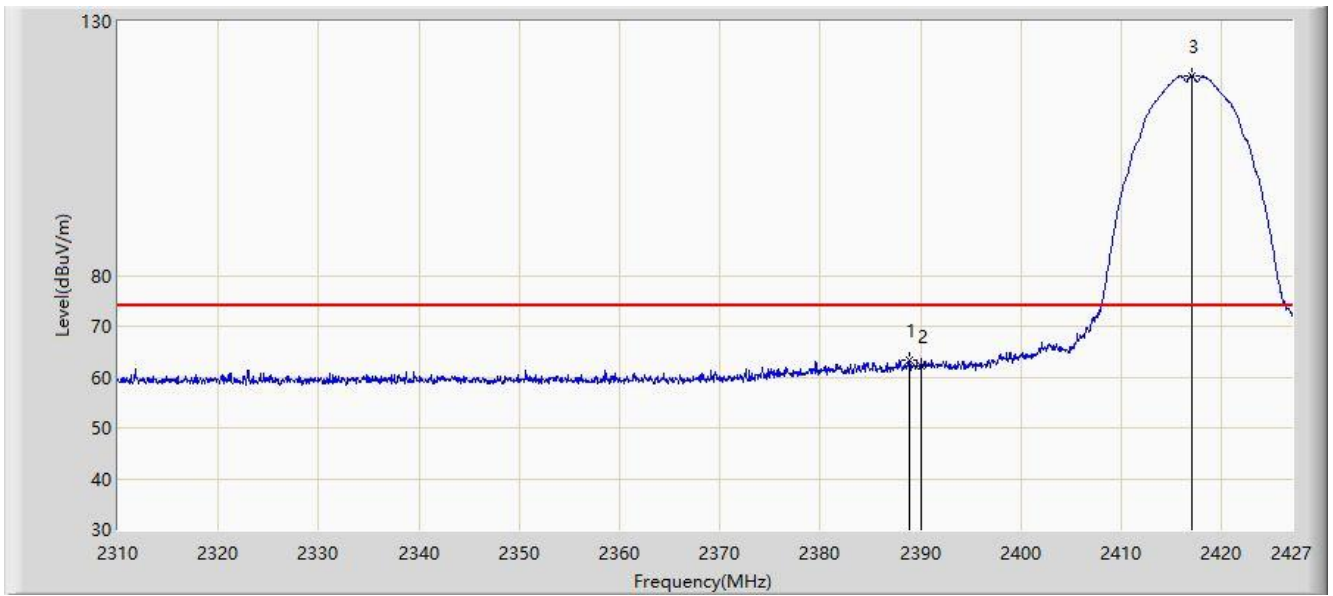


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.858	63.202	30.646	-10.798	74.000	32.556	PK
2			2390.000	62.229	29.675	-11.771	74.000	32.554	PK
3		*	2416.997	119.307	86.787	N/A	N/A	32.520	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2417MHz (CDD Mode)	

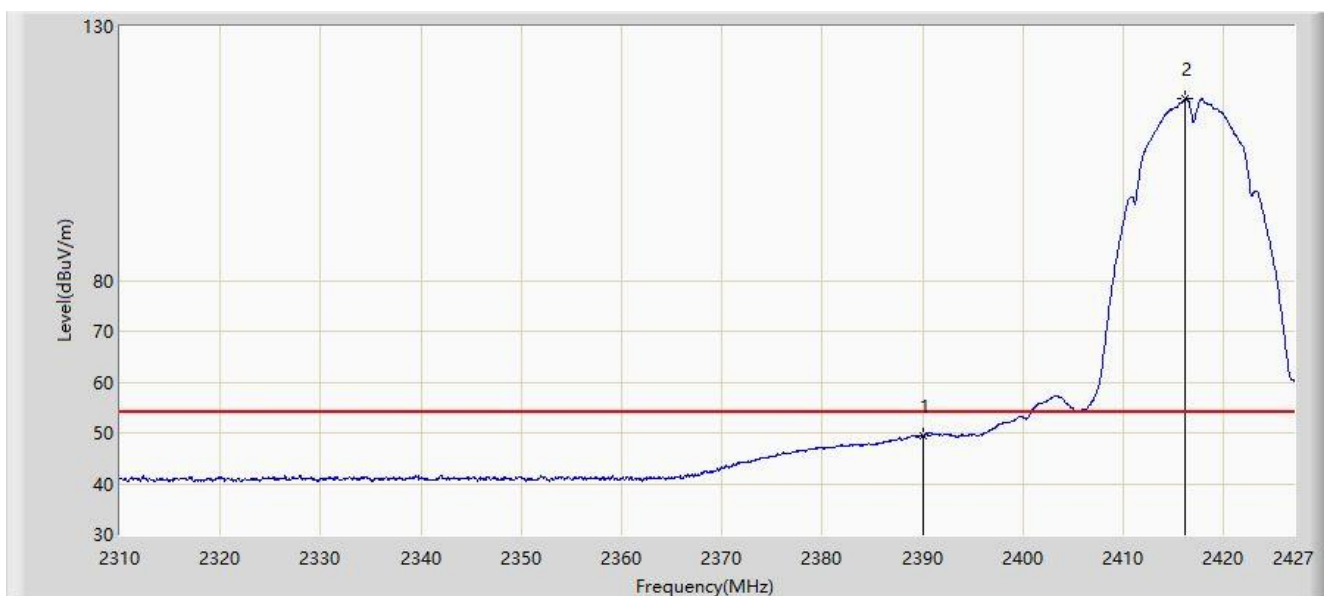


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.435	16.881	-4.565	54.000	32.554	AV
2		*	2416.119	115.654	83.133	N/A	N/A	32.521	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2422MHz (CDD Mode)	

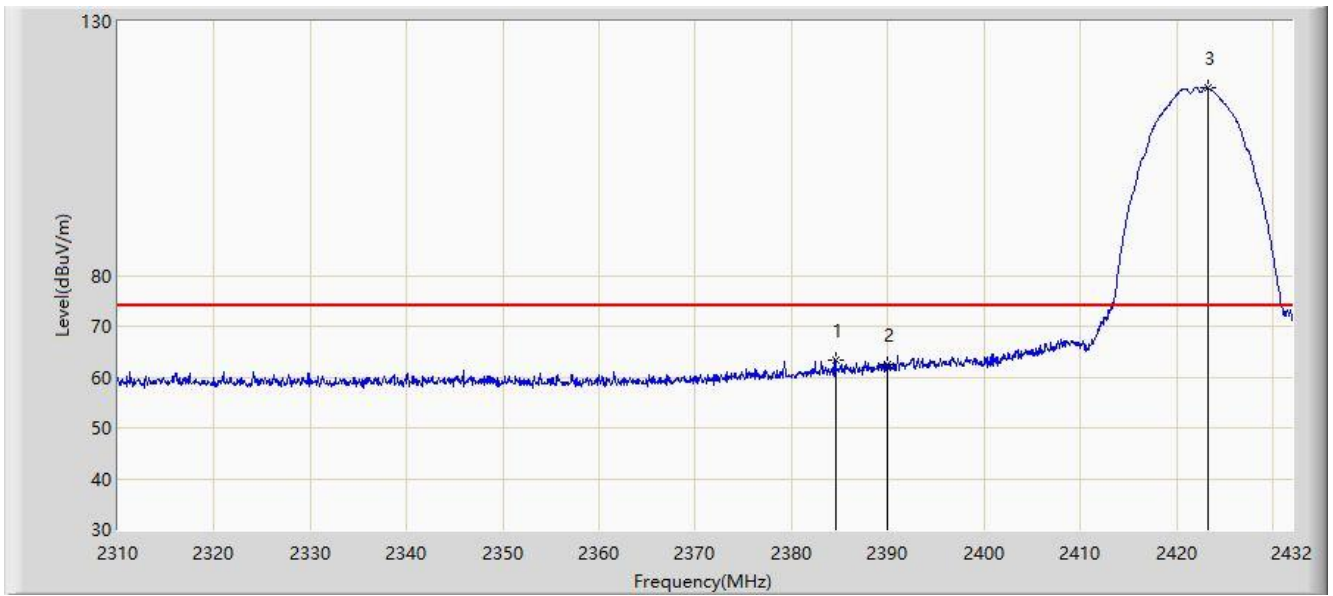


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.542	63.329	30.767	-10.671	74.000	32.561	PK
2			2390.000	62.435	29.881	-11.565	74.000	32.554	PK
3		*	2423.216	116.971	84.459	N/A	N/A	32.513	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2422MHz (CDD Mode)	

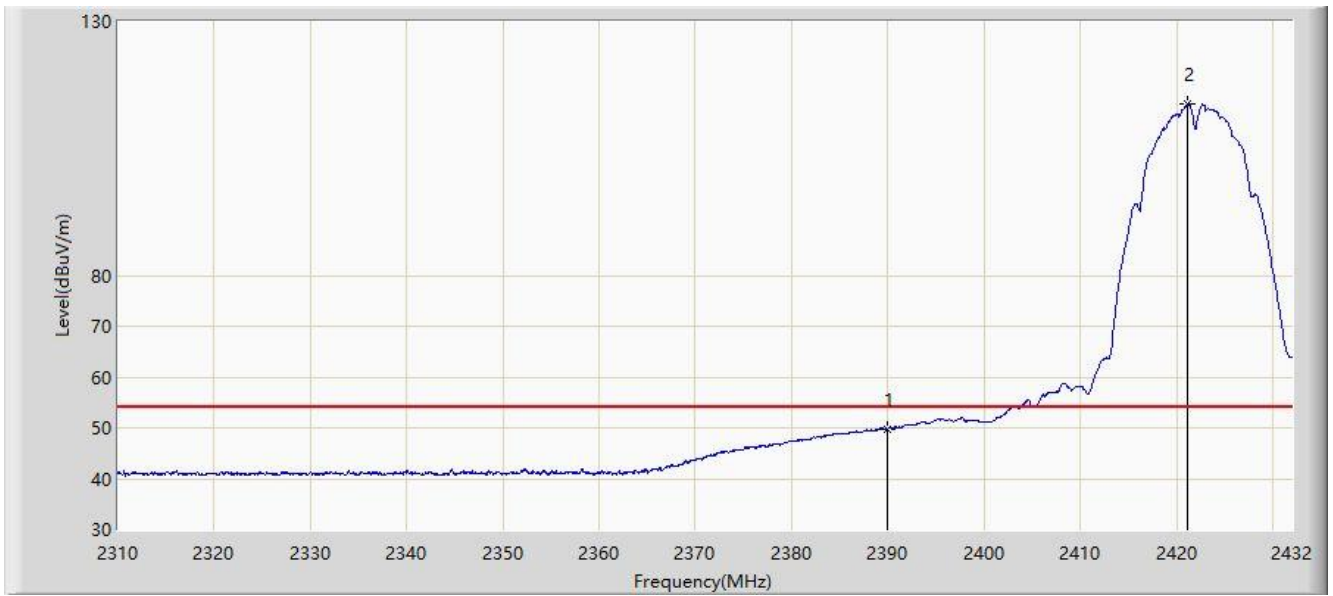


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.786	17.232	-4.214	54.000	32.554	AV
2		*	2421.142	113.703	81.188	N/A	N/A	32.515	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2422MHz (CDD Mode)	

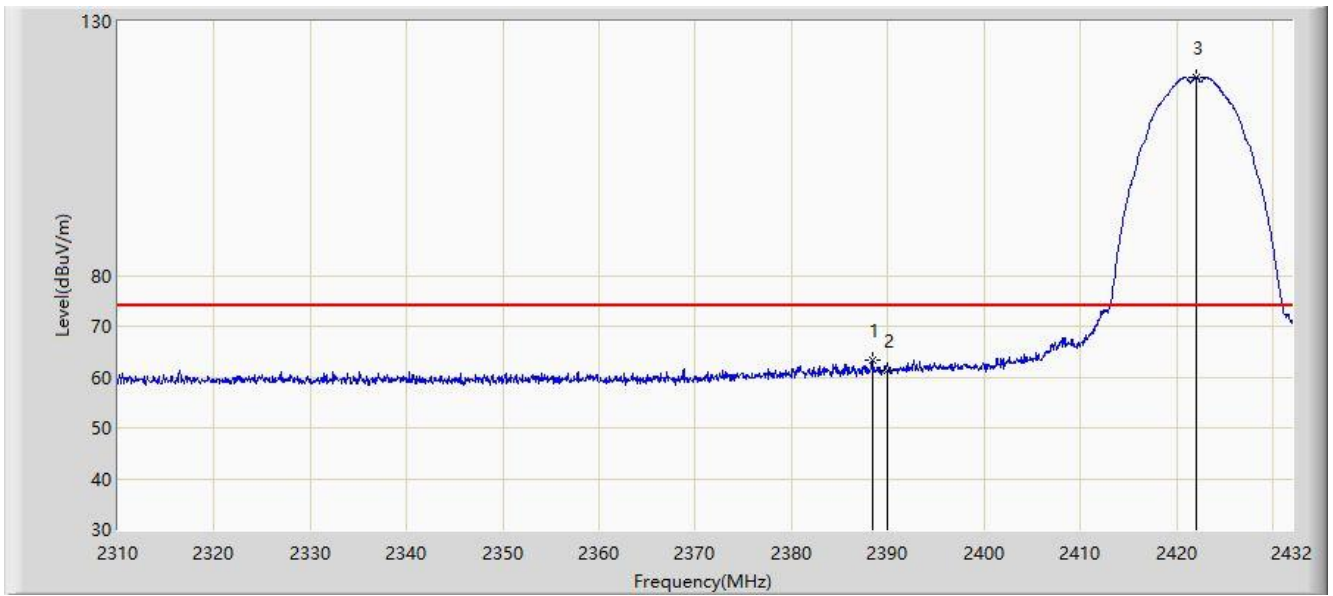


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.385	63.311	30.754	-10.689	74.000	32.557	PK
2			2390.000	61.304	28.750	-12.696	74.000	32.554	PK
3		*	2422.057	119.084	86.570	N/A	N/A	32.513	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2422MHz (CDD Mode)	

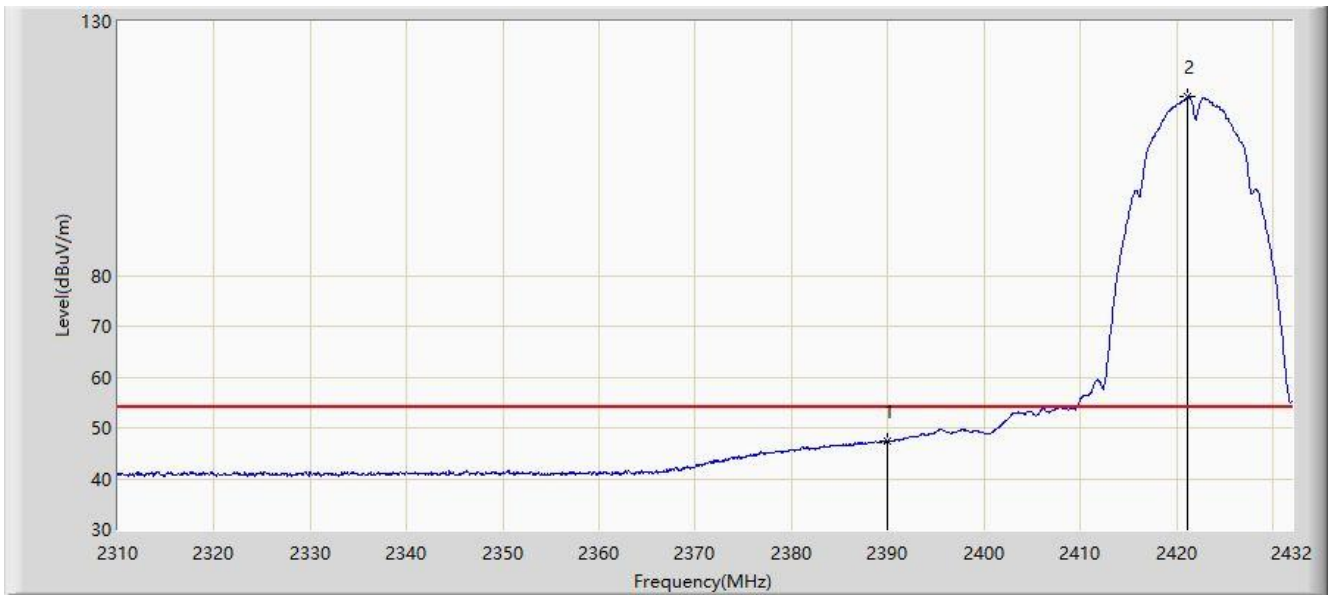


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.279	14.725	-6.721	54.000	32.554	AV
2		*	2421.203	115.255	82.740	N/A	N/A	32.514	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2437MHz (CDD Mode)	

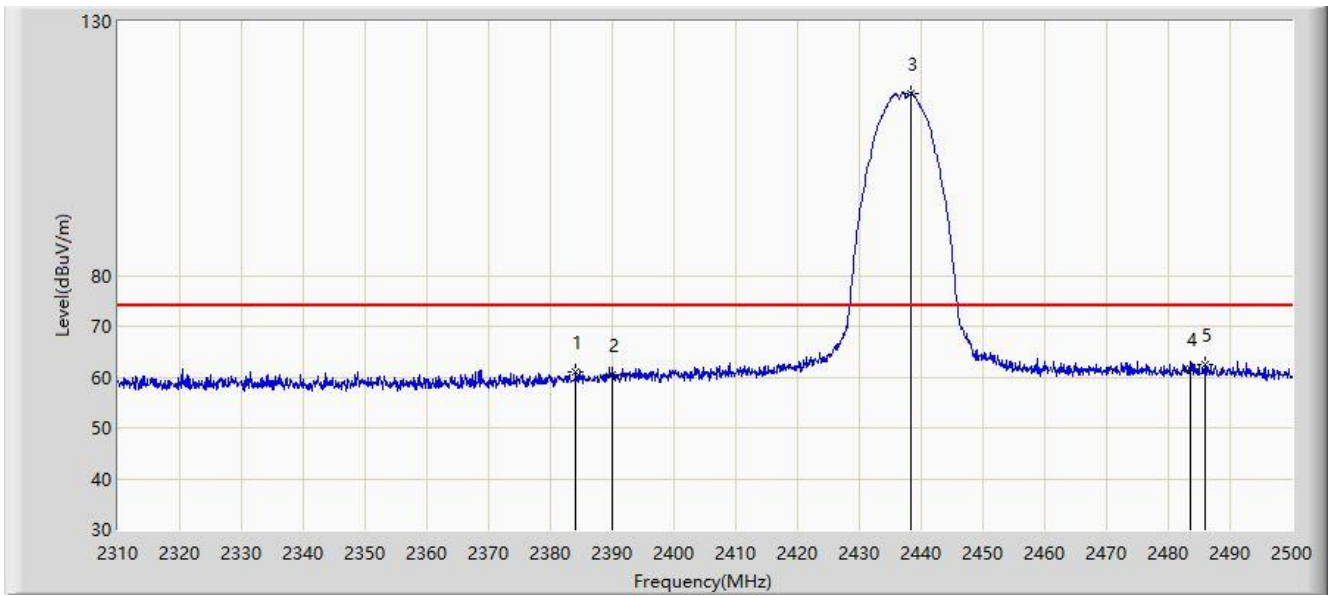


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.100	61.027	28.464	-12.973	74.000	32.563	PK
2			2390.000	60.385	27.831	-13.615	74.000	32.554	PK
3		*	2438.440	115.896	83.402	N/A	N/A	32.494	PK
4			2483.500	61.527	28.946	-12.473	74.000	32.580	PK
5			2485.845	62.510	29.922	-11.490	74.000	32.587	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 22:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2437MHz (CDD Mode)	

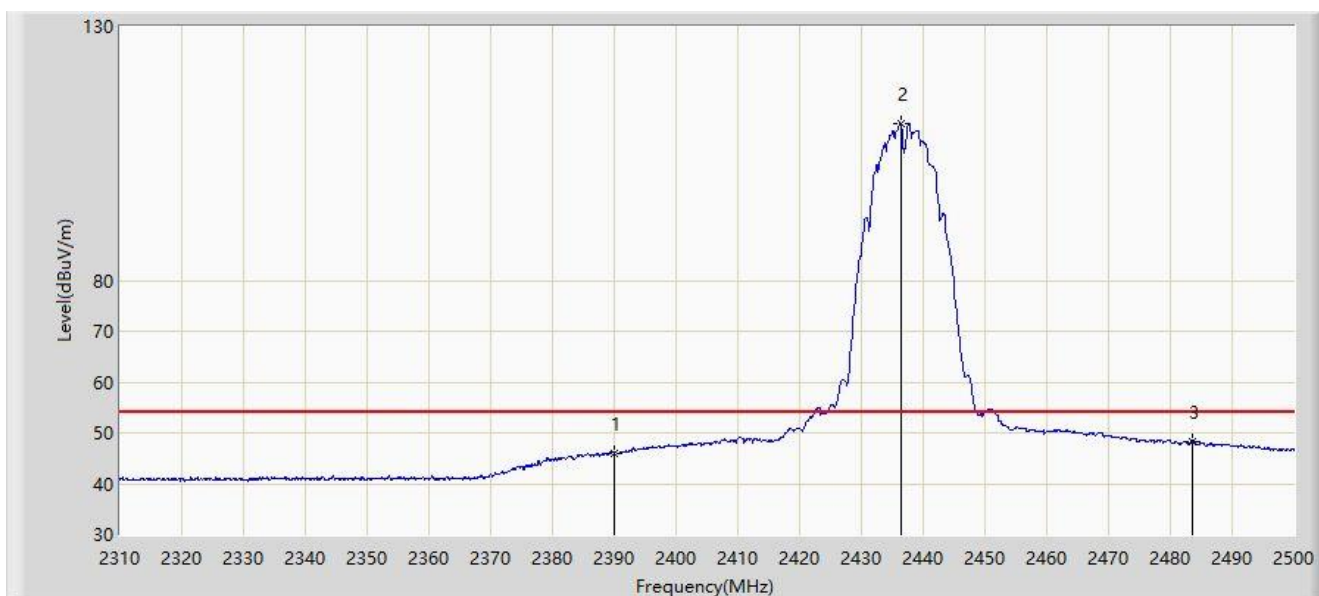


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.066	13.512	-7.934	54.000	32.554	AV
2		*	2436.350	110.738	78.241	N/A	N/A	32.497	AV
3			2483.500	48.378	15.797	-5.622	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2437MHz (CDD Mode)	

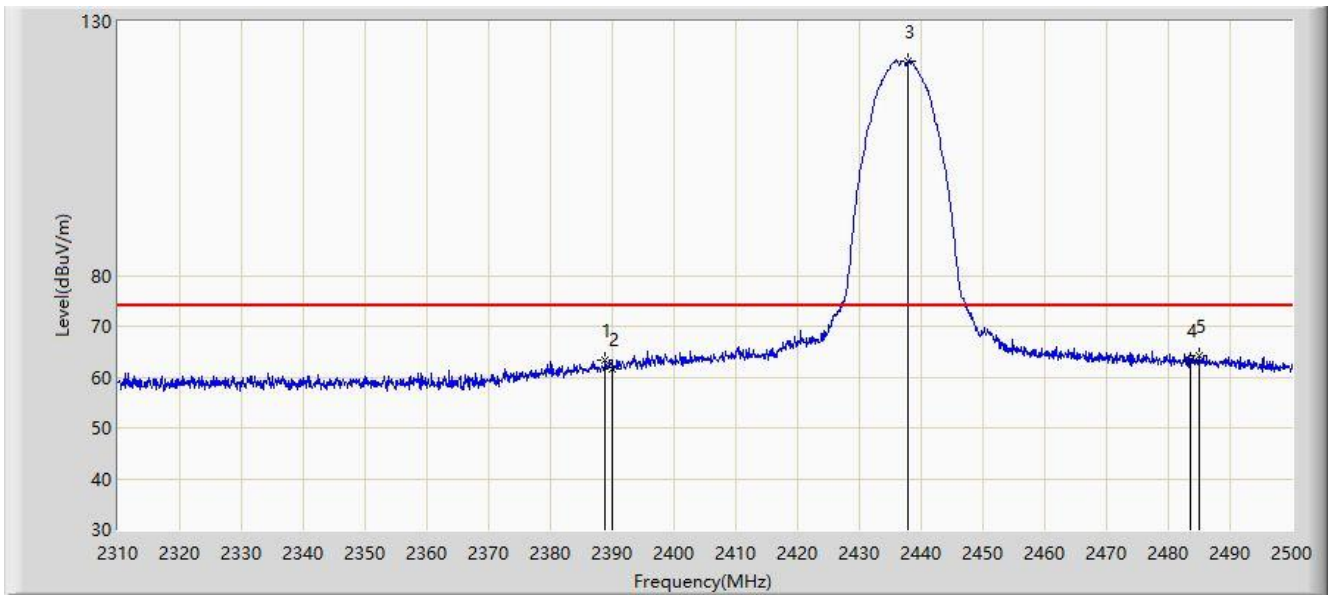


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.850	63.203	30.647	-10.797	74.000	32.556	PK
2			2390.000	61.513	28.959	-12.487	74.000	32.554	PK
3		*	2437.965	122.099	89.604	N/A	N/A	32.495	PK
4			2483.500	63.219	30.638	-10.781	74.000	32.580	PK
5			2485.085	64.242	31.657	-9.758	74.000	32.585	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2437MHz (CDD Mode)	

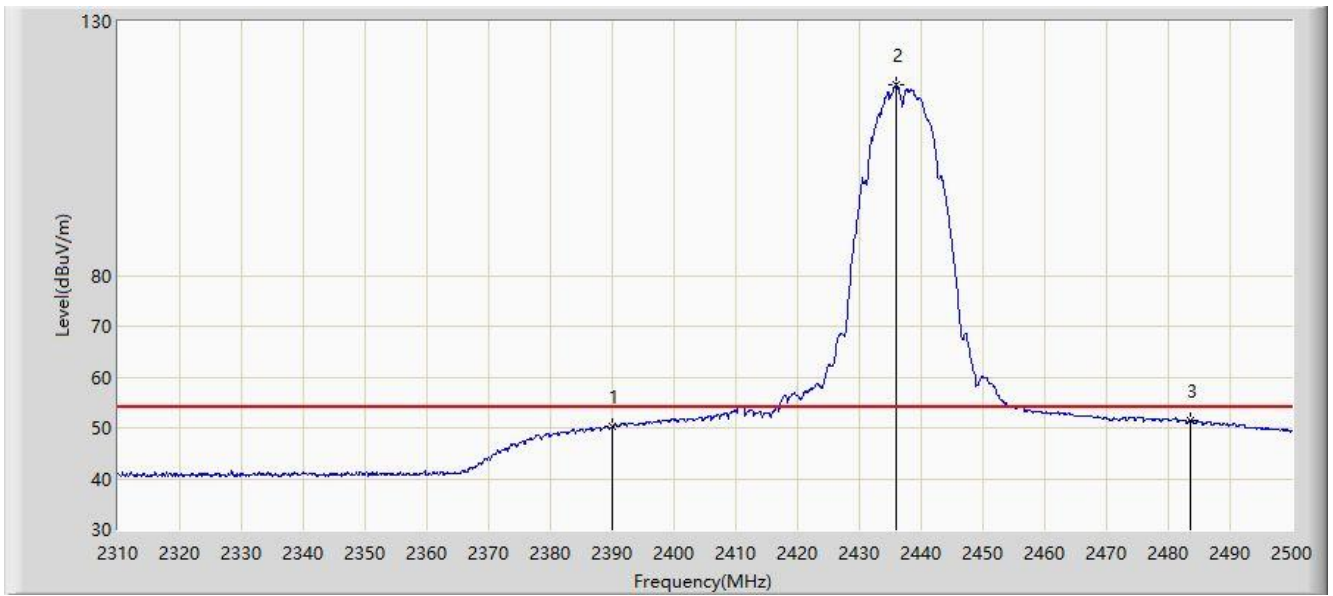


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.244	17.690	-3.756	54.000	32.554	AV
2		*	2435.970	117.551	85.054	N/A	N/A	32.497	AV
3			2483.500	51.388	18.807	-2.612	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2452MHz (CDD Mode)	

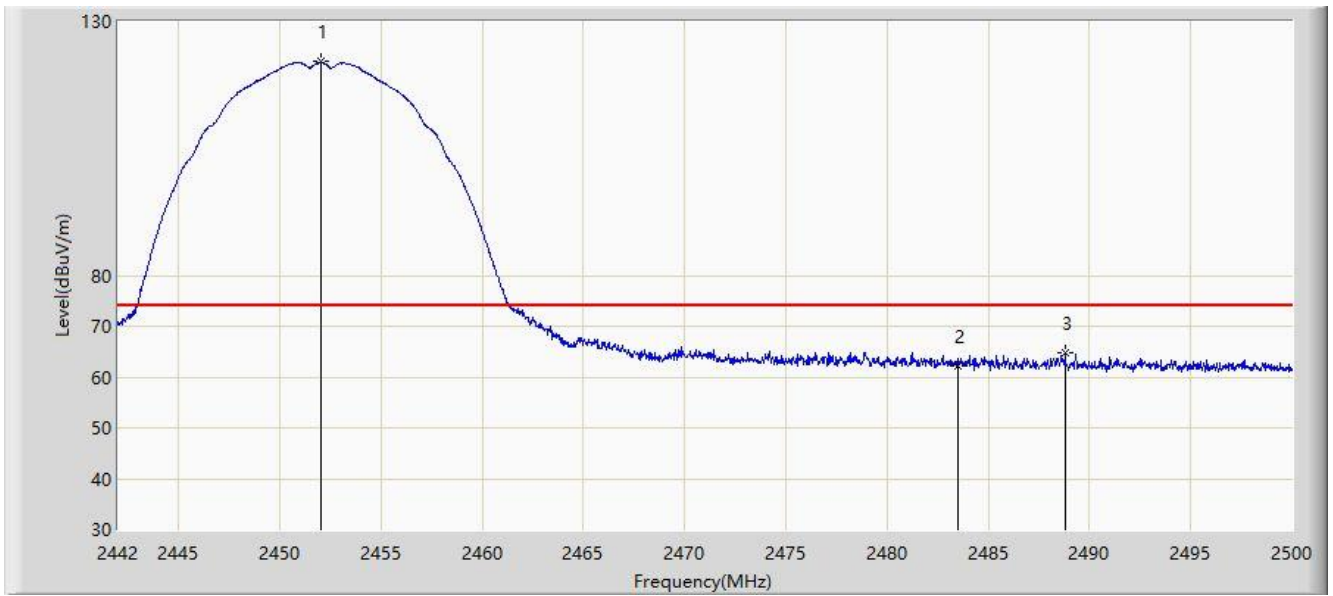


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.063	122.034	89.535	N/A	N/A	32.499	PK
2			2483.500	62.109	29.528	-11.891	74.000	32.580	PK
3			2488.806	64.839	32.243	-9.161	74.000	32.597	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2452MHz (CDD Mode)	

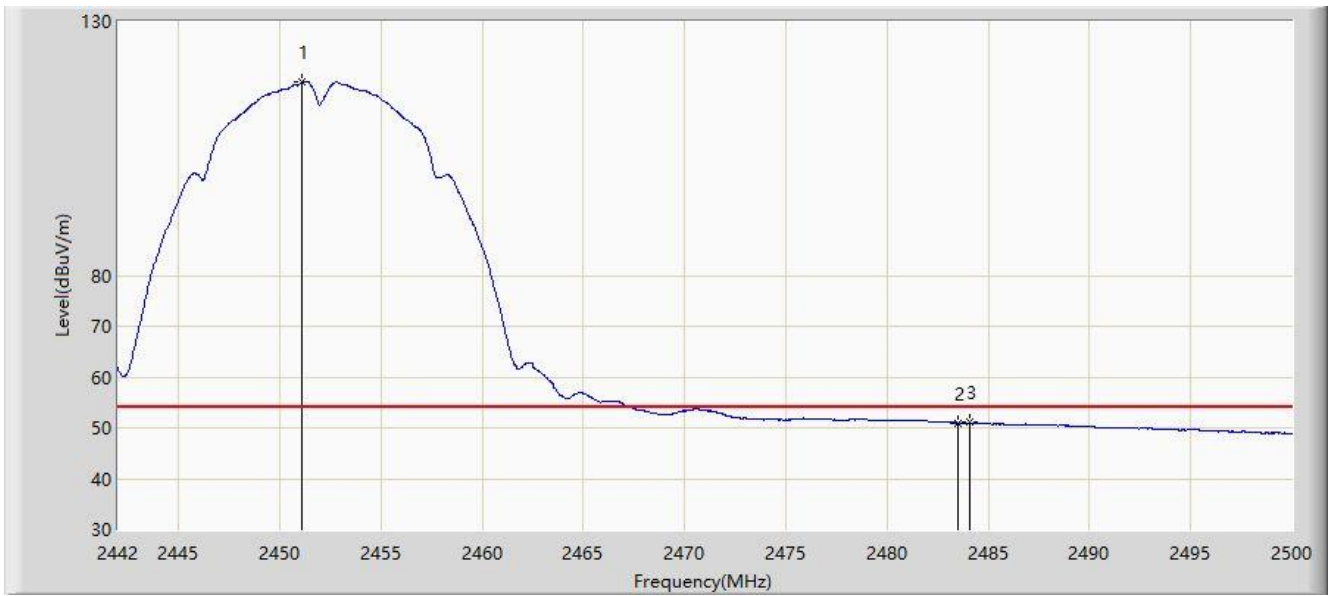


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2451.106	118.051	85.554	N/A	N/A	32.498	AV
2			2483.500	50.986	18.405	-3.014	54.000	32.580	AV
3			2484.079	51.019	18.437	-2.981	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2452MHz (CDD Mode)	

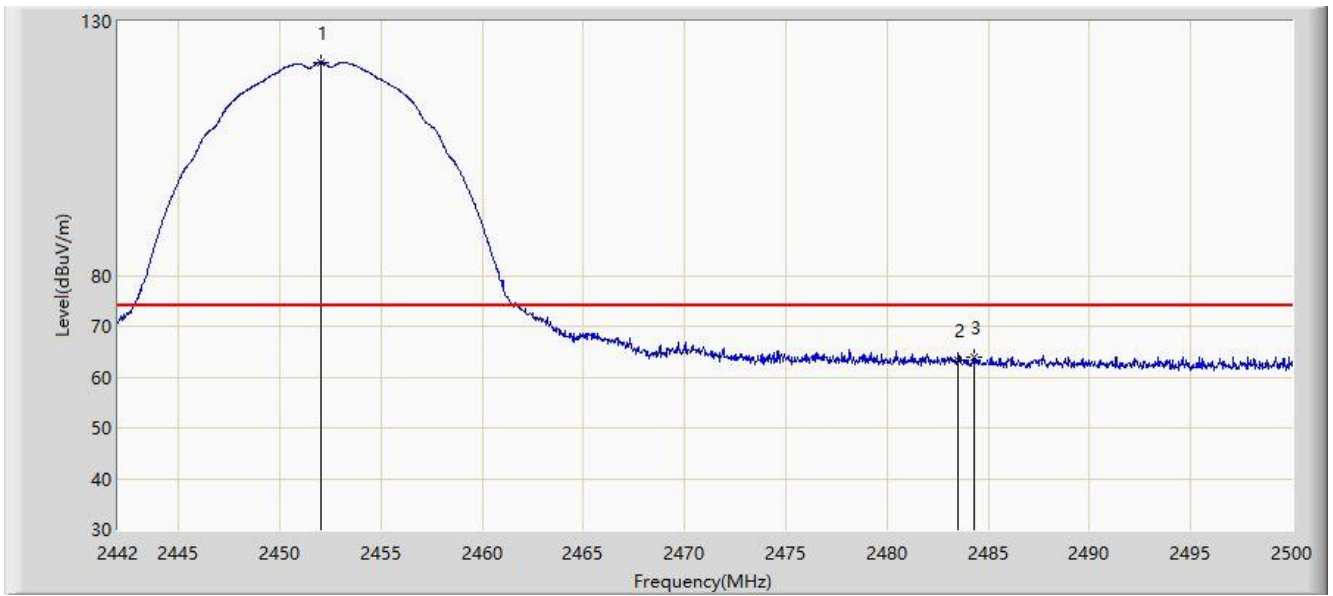


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.063	121.932	89.433	N/A	N/A	32.499	PK
2			2483.500	63.316	30.735	-10.684	74.000	32.580	PK
3			2484.282	63.774	31.191	-10.226	74.000	32.583	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2452MHz (CDD Mode)	

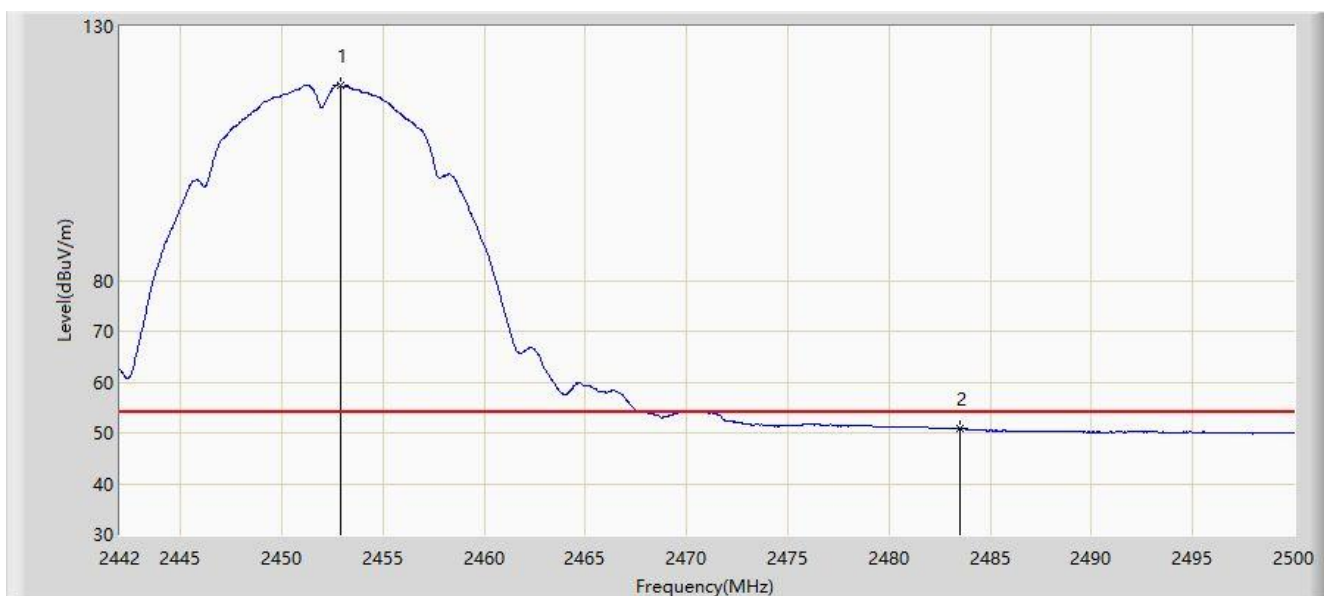


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.875	118.499	85.999	N/A	N/A	32.501	AV
2			2483.500	50.911	18.330	-3.089	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2457MHz (CDD Mode)	

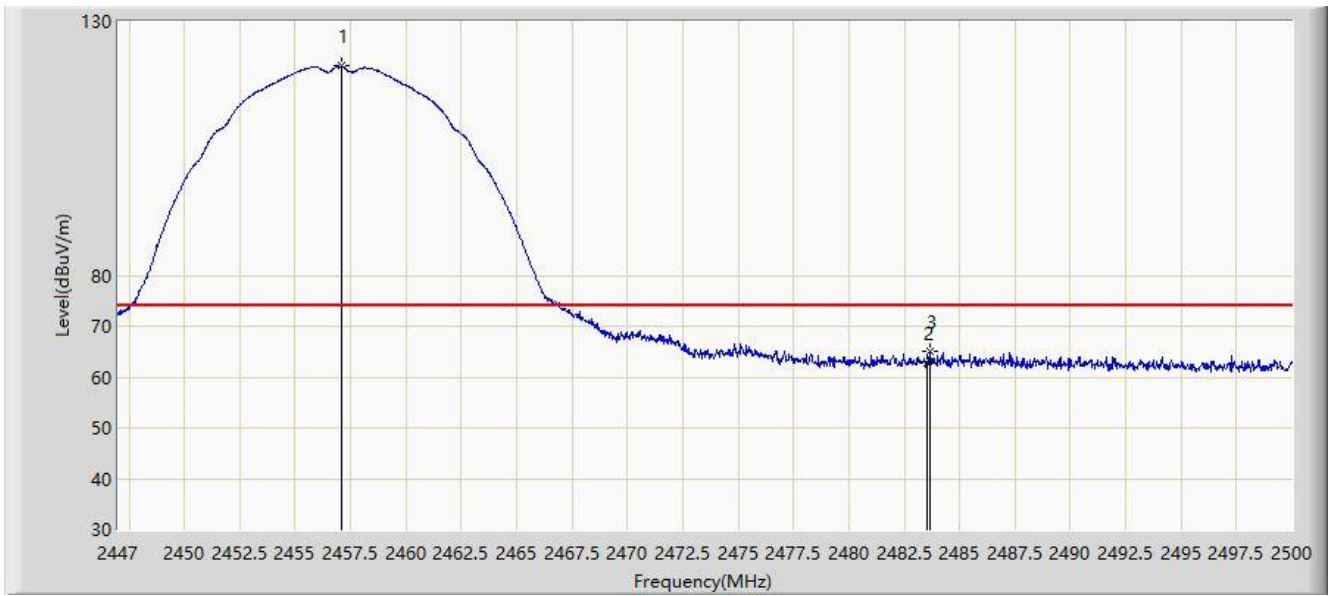


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.070	121.204	88.696	N/A	N/A	32.508	PK
2			2483.500	62.742	30.161	-11.258	74.000	32.580	PK
3			2483.676	65.076	32.495	-8.924	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2457MHz (CDD Mode)	

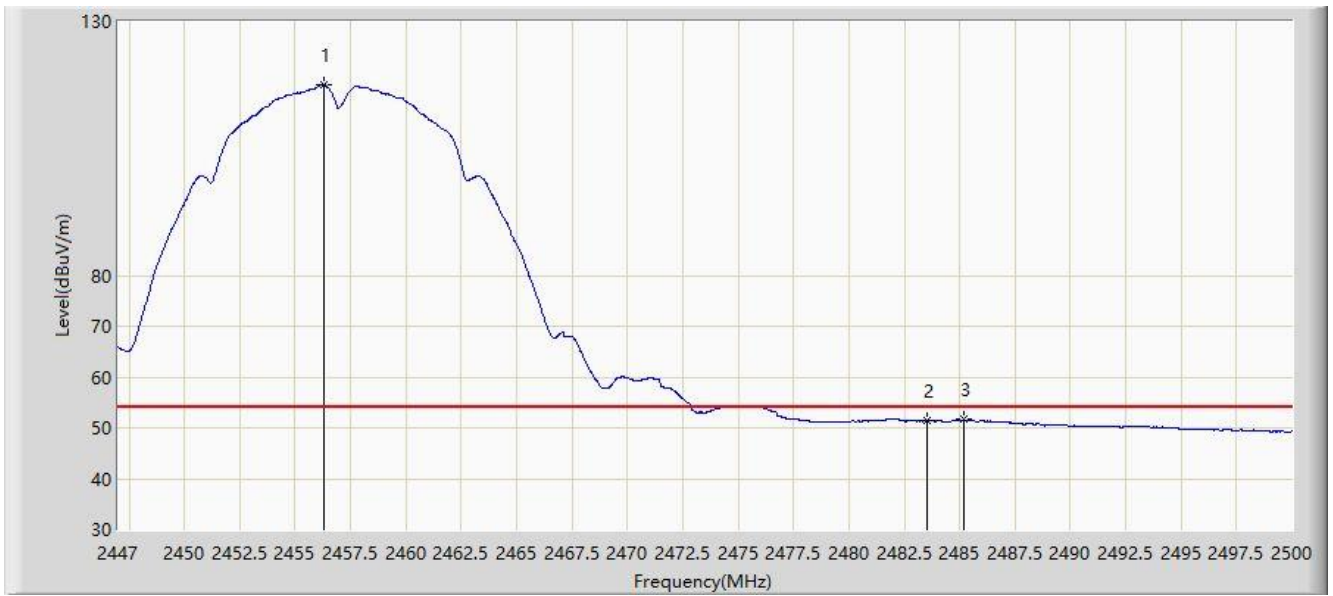


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.275	117.548	85.042	N/A	N/A	32.507	AV
2			2483.500	51.396	18.815	-2.604	54.000	32.580	AV
3			2485.187	51.597	19.011	-2.403	54.000	32.585	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2457MHz (CDD Mode)	

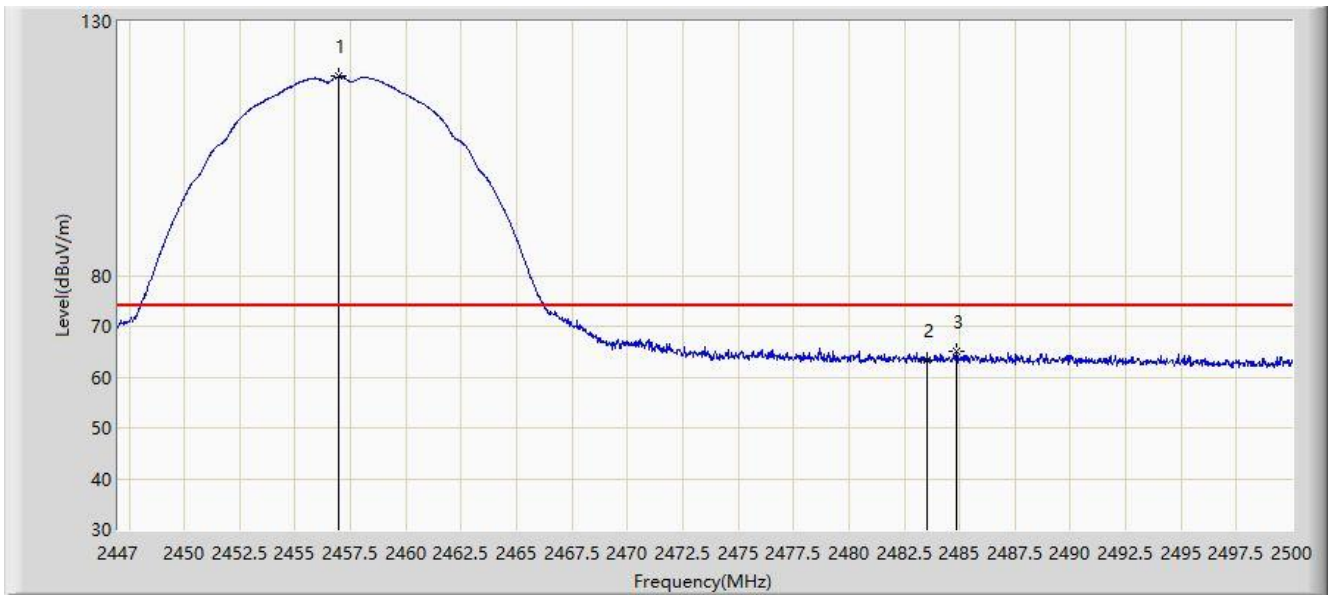


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.937	119.156	86.649	N/A	N/A	32.507	PK
2			2483.500	63.474	30.893	-10.526	74.000	32.580	PK
3			2484.842	65.062	32.477	-8.938	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 05:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2457MHz (CDD Mode)	

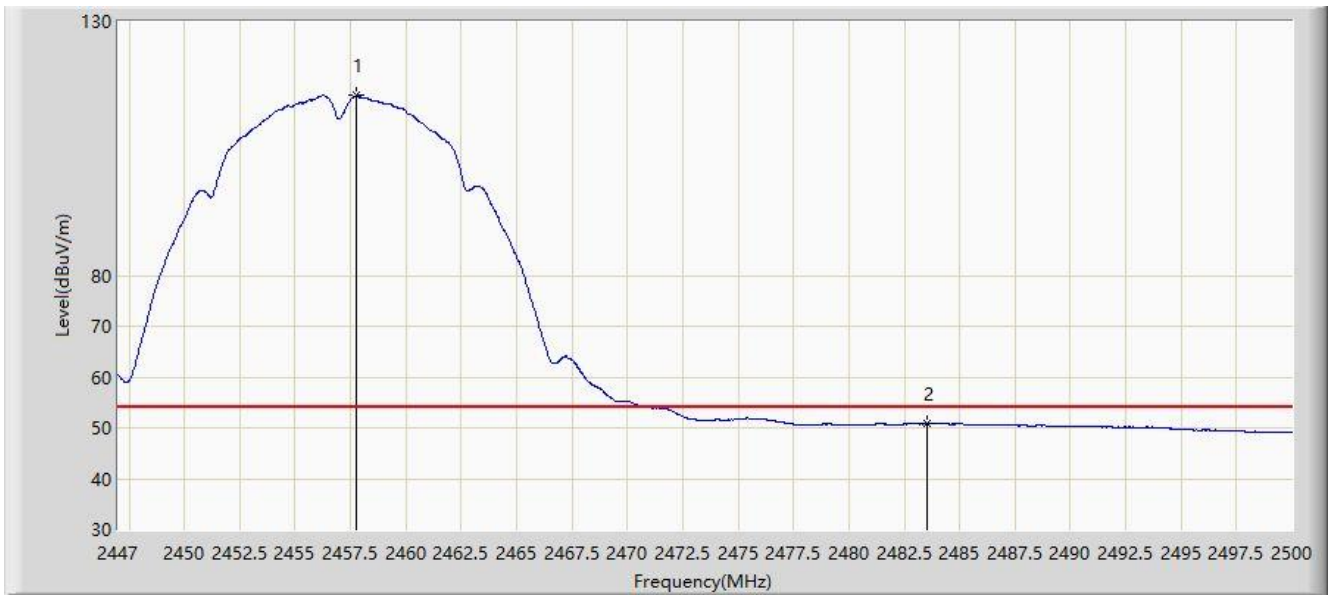


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.759	115.424	82.915	N/A	N/A	32.509	AV
2			2483.500	50.857	18.276	-3.143	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2462MHz (CDD Mode)	

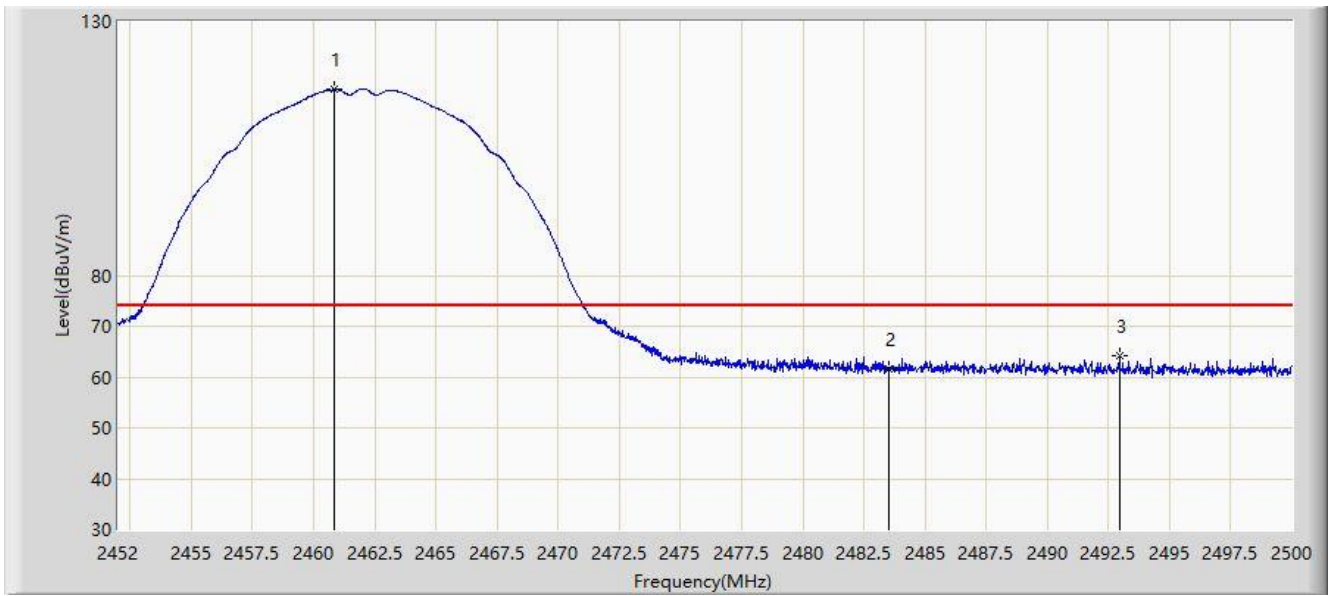

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.856	116.553	84.039	N/A	N/A	32.514	PK
2			2483.500	61.685	29.104	-12.315	74.000	32.580	PK
3			2492.944	64.073	31.464	-9.927	74.000	32.608	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2462MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.096	112.800	80.285	N/A	N/A	32.514	AV
2			2483.500	49.521	16.940	-4.479	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2462MHz (CDD Mode)	

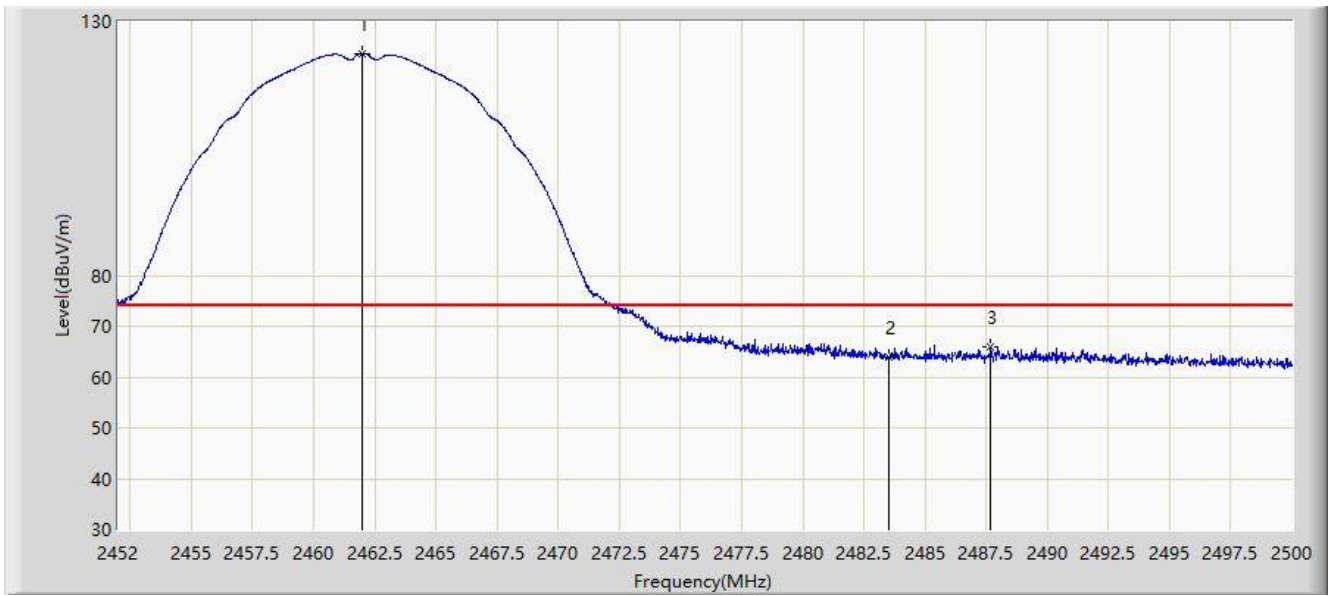

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.008	123.689	91.173	N/A	N/A	32.516	PK
2			2483.500	63.966	31.385	-10.034	74.000	32.580	PK
3			2487.688	65.980	33.387	-8.020	74.000	32.593	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11b at Channel 2462MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.144	115.581	83.066	N/A	N/A	32.514	AV
2			2483.500	51.653	19.072	-2.347	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2412MHz (CDD Mode)	

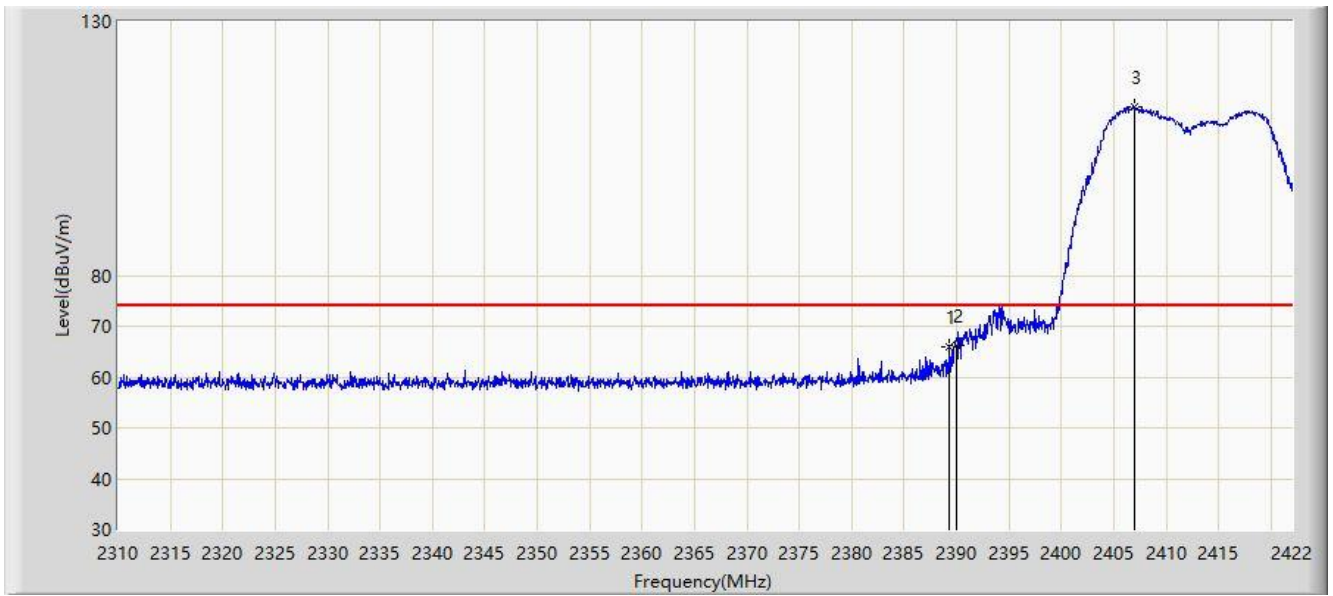


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.352	65.808	33.253	-8.192	74.000	32.555	PK
2			2390.000	66.166	33.612	-7.834	74.000	32.554	PK
3		*	2407.048	113.073	80.541	N/A	N/A	32.532	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2412MHz (CDD Mode)	

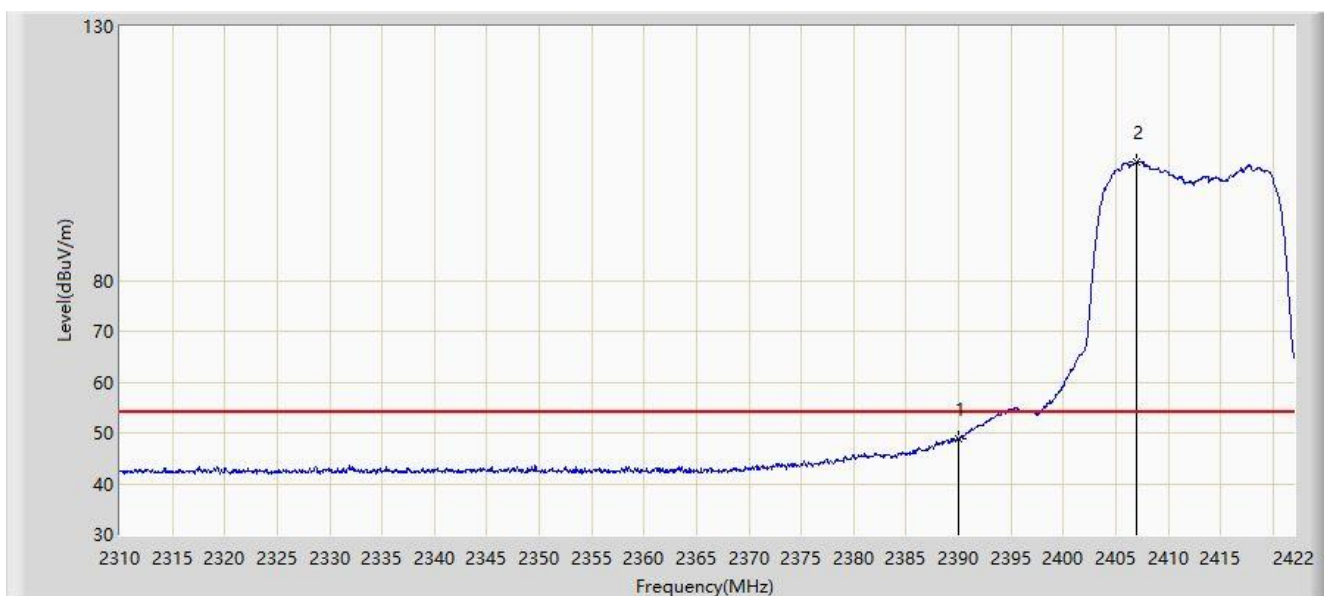


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.830	16.276	-5.170	54.000	32.554	AV
2		*	2407.048	103.476	70.944	N/A	N/A	32.532	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2412MHz (CDD Mode)	

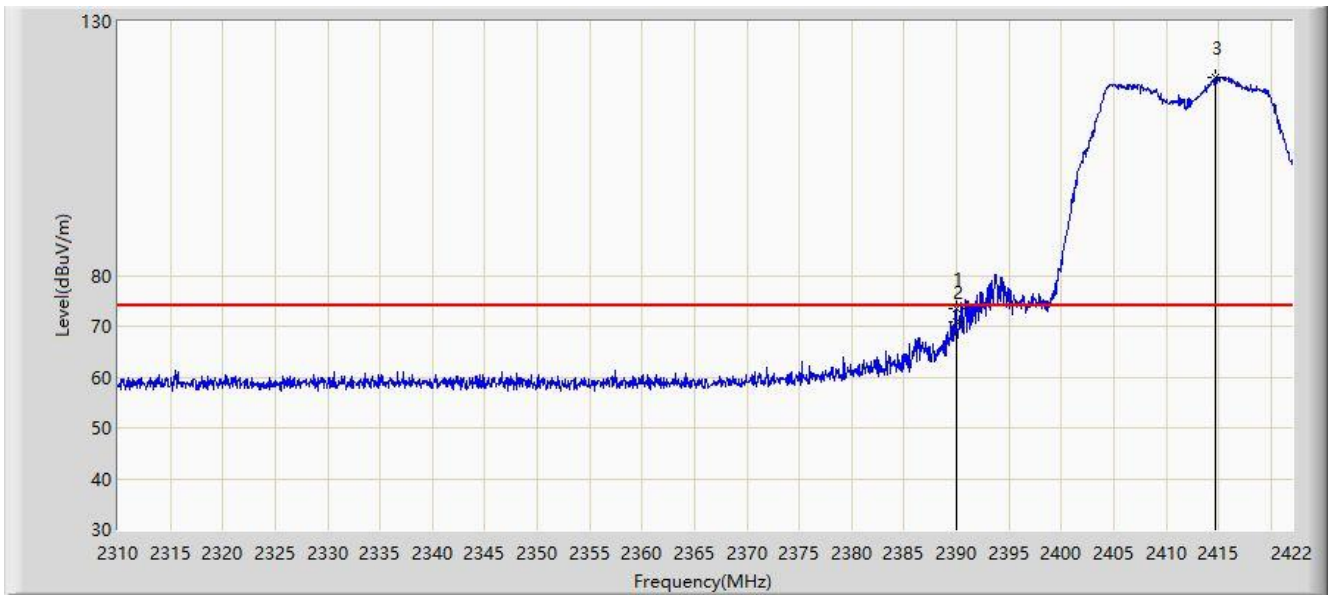


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	73.376	40.822	-0.624	74.000	32.554	PK
2			2390.000	70.870	38.316	-3.130	74.000	32.554	PK
3		*	2414.720	119.120	86.598	N/A	N/A	32.522	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/23 - 23:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2412MHz (CDD Mode)	

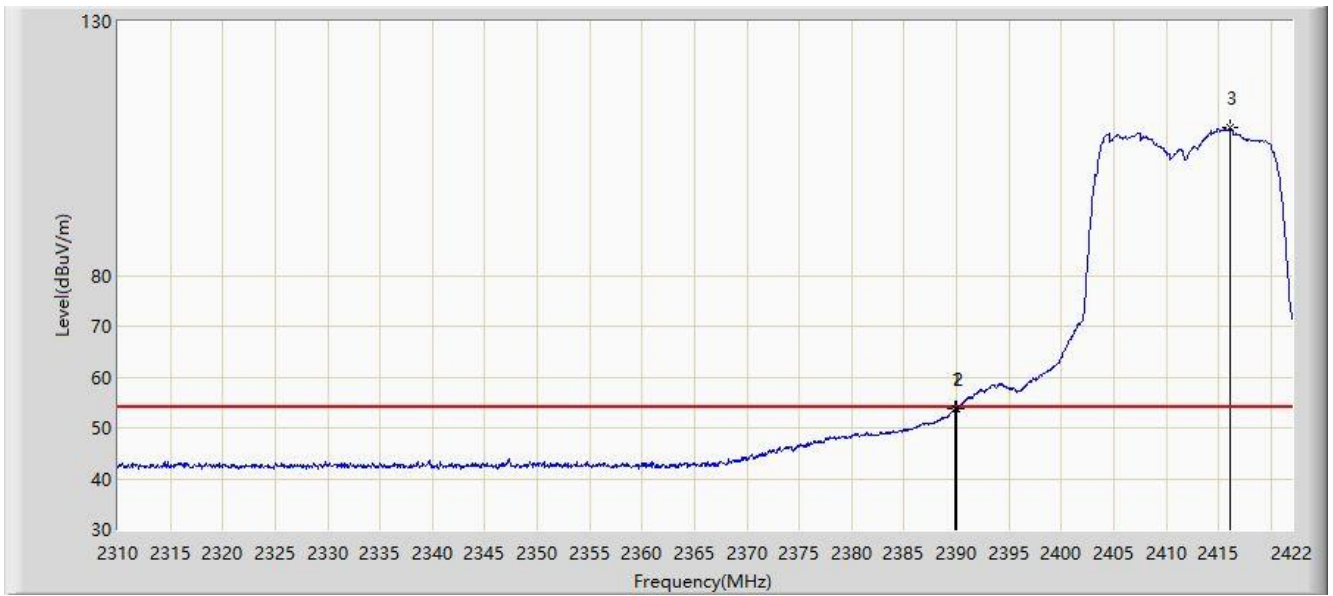


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	53.791	21.236	-0.209	54.000	32.555	AV
2			2390.000	53.730	21.176	-0.270	54.000	32.554	AV
3		*	2416.064	109.142	76.621	N/A	N/A	32.521	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2417MHz (CDD Mode)	

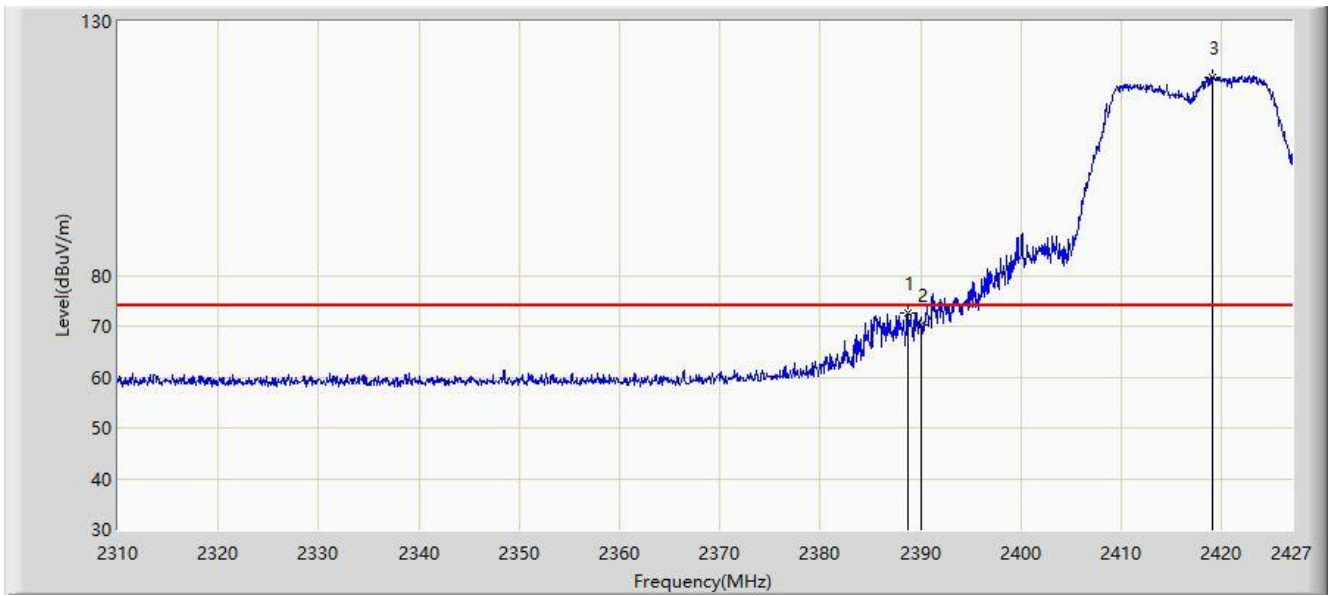


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.683	72.692	40.136	-1.308	74.000	32.556	PK
2			2390.000	70.345	37.791	-3.655	74.000	32.554	PK
3		*	2419.103	119.085	86.568	N/A	N/A	32.517	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2417MHz (CDD Mode)	

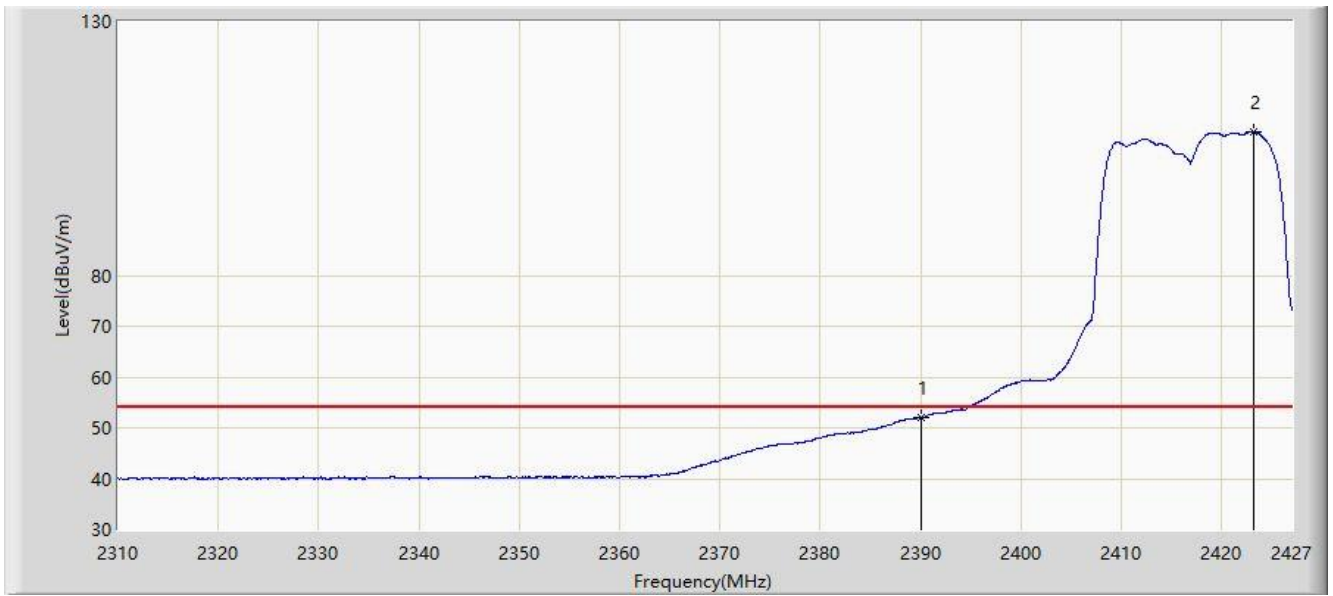


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.071	19.517	-1.929	54.000	32.554	AV
2		*	2423.139	108.209	75.697	N/A	N/A	32.513	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2417MHz (CDD Mode)	

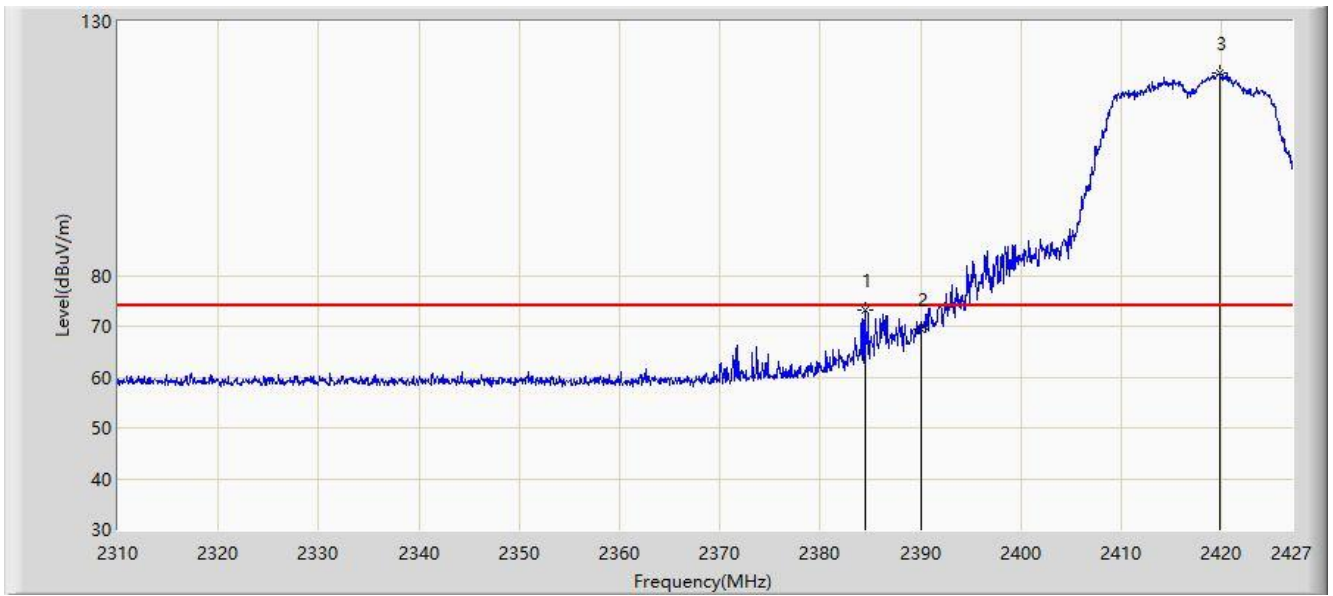


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.412	73.170	40.608	-0.830	74.000	32.562	PK
2			2390.000	69.379	36.825	-4.621	74.000	32.554	PK
3		*	2419.863	119.832	87.316	N/A	N/A	32.517	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2417MHz (CDD Mode)	

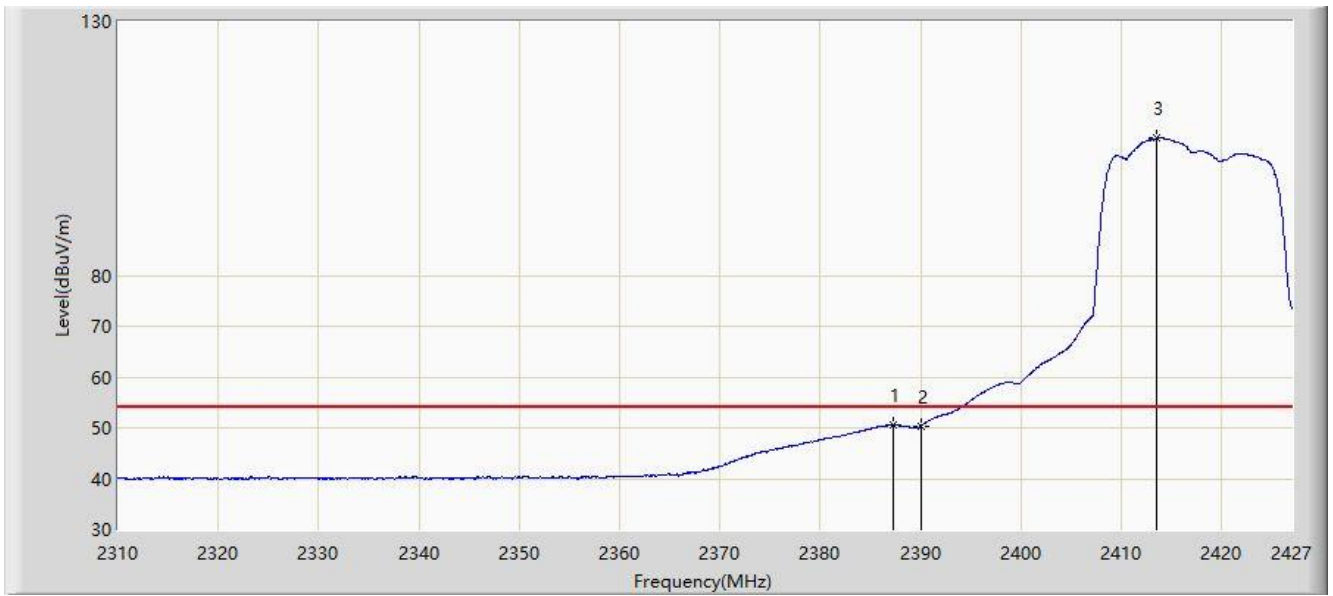


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.279	50.554	17.996	-3.446	54.000	32.558	AV
2			2390.000	50.385	17.831	-3.615	54.000	32.554	AV
3		*	2413.487	106.986	74.462	N/A	N/A	32.524	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2422MHz (CDD Mode)	

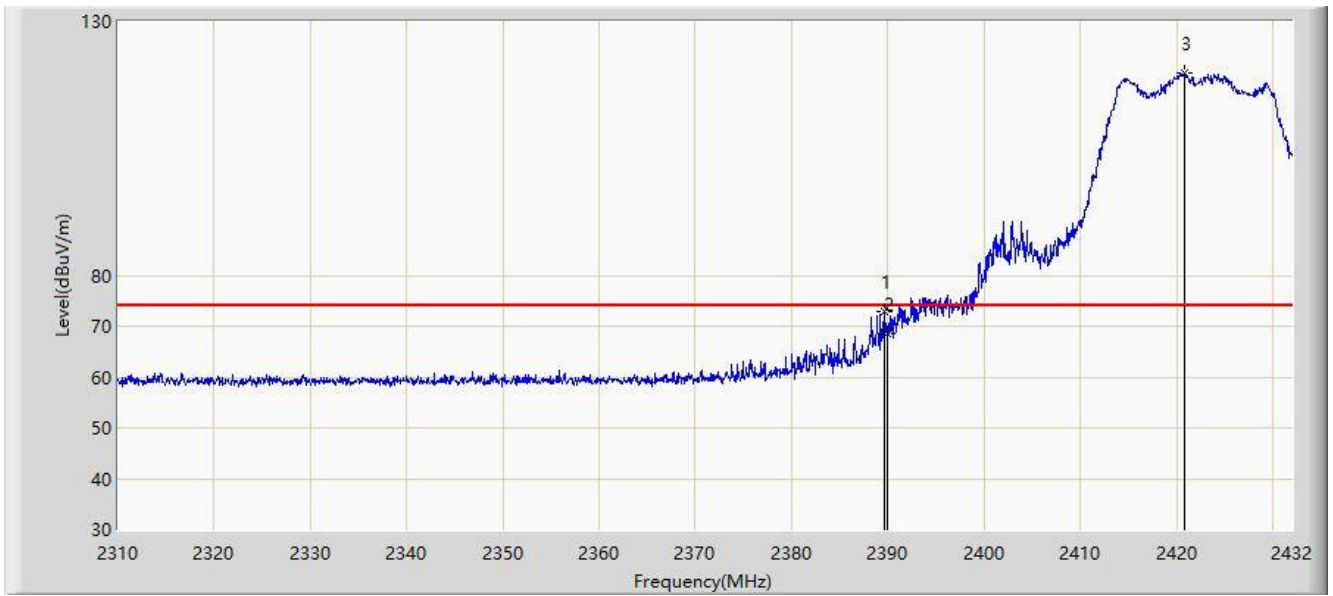


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.605	72.875	40.320	-1.125	74.000	32.555	PK
2			2390.000	68.500	35.946	-5.500	74.000	32.554	PK
3		*	2420.776	119.774	87.259	N/A	N/A	32.515	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2422MHz (CDD Mode)	

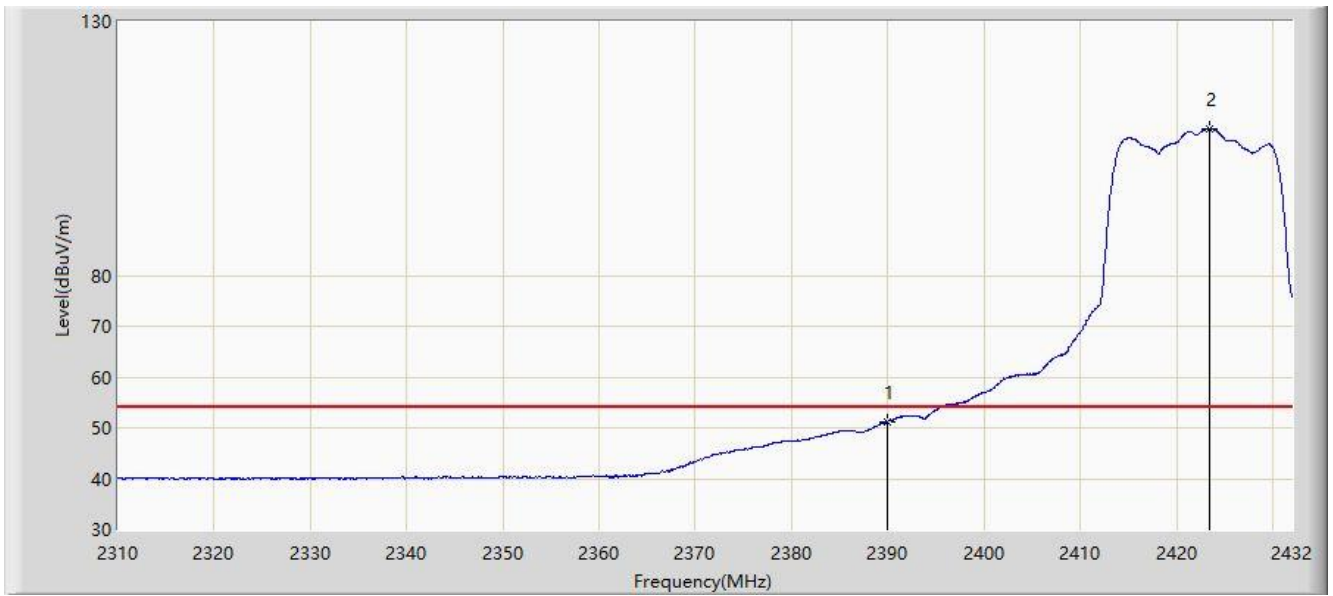


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.213	18.659	-2.787	54.000	32.554	AV
2		*	2423.399	108.845	76.333	N/A	N/A	32.512	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2422MHz (CDD Mode)	

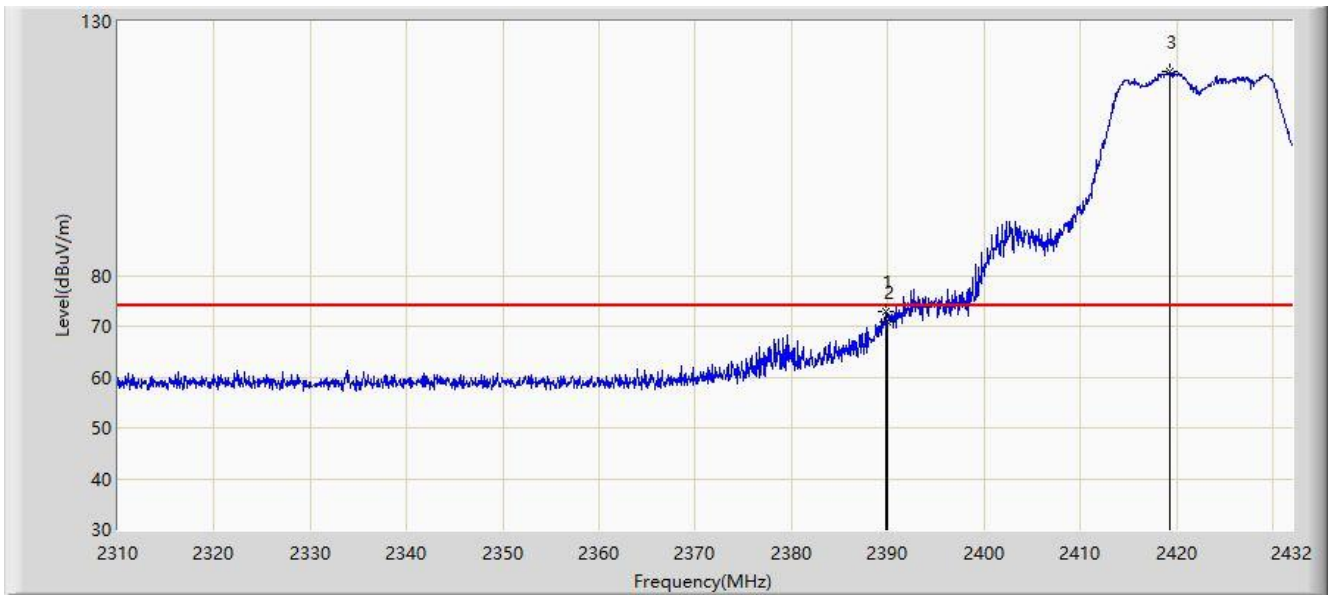


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.788	72.968	40.413	-1.032	74.000	32.555	PK
2			2390.000	70.786	38.232	-3.214	74.000	32.554	PK
3		*	2419.251	120.025	87.508	N/A	N/A	32.517	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2422MHz (CDD Mode)	

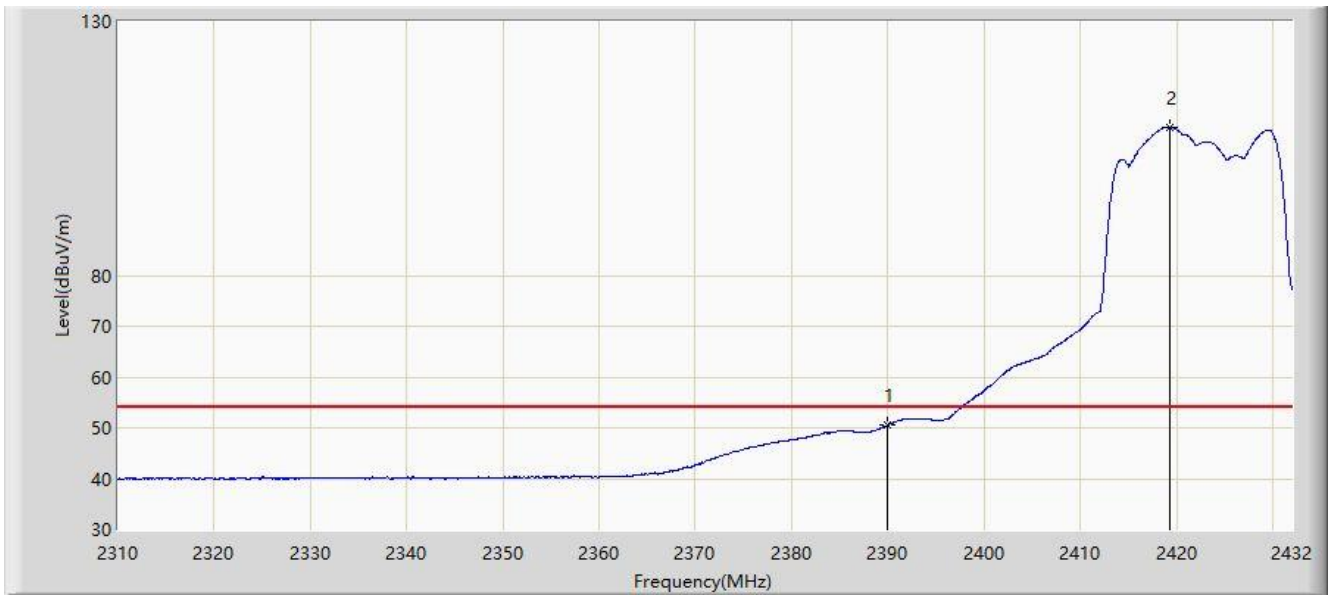


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.563	18.009	-3.437	54.000	32.554	AV
2		*	2419.251	109.159	76.642	N/A	N/A	32.517	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2437MHz (CDD Mode)	

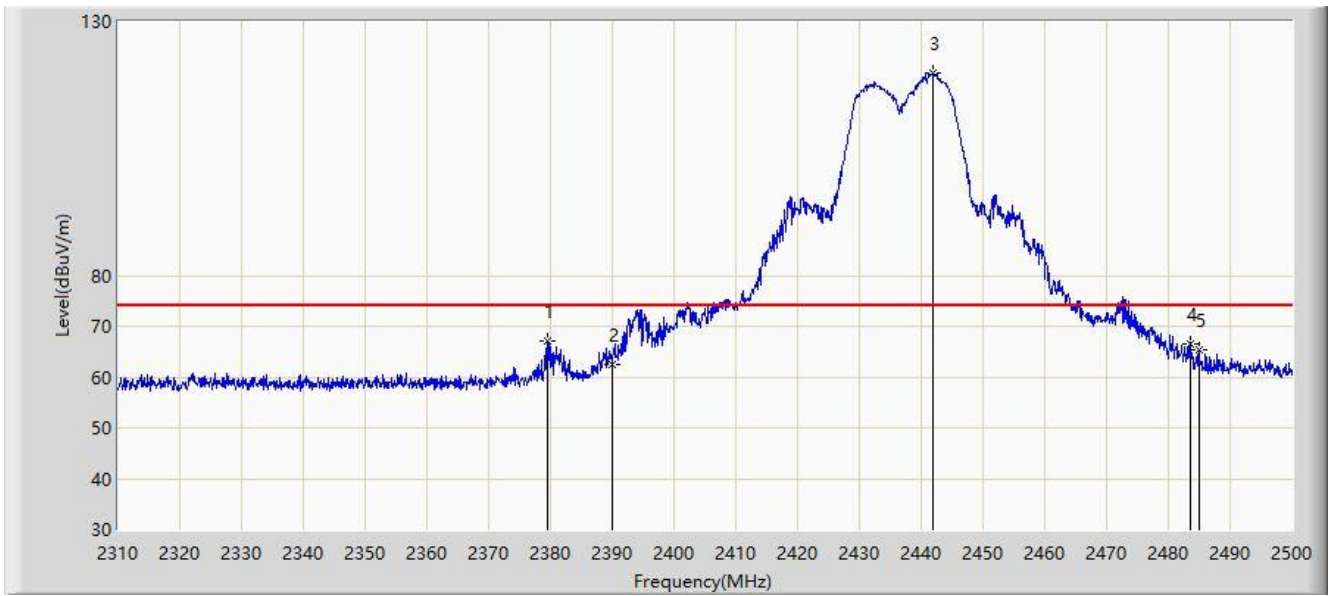


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2379.635	67.224	34.655	-6.776	74.000	32.568	PK
2			2390.000	62.492	29.938	-11.508	74.000	32.554	PK
3		*	2441.955	119.716	87.226	N/A	N/A	32.490	PK
4			2483.500	66.456	33.875	-7.544	74.000	32.580	PK
5			2484.990	65.278	32.693	-8.722	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2437MHz (CDD Mode)	

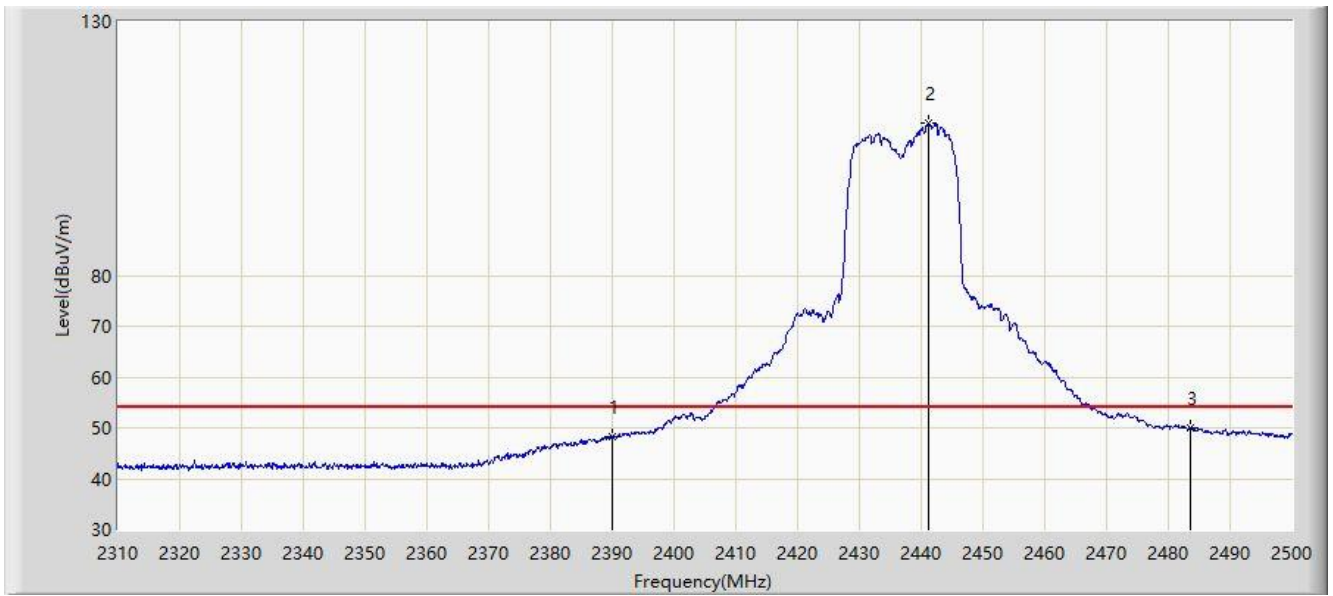


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.168	15.614	-5.832	54.000	32.554	AV
2		*	2441.100	109.883	77.392	N/A	N/A	32.491	AV
3			2483.500	49.964	17.383	-4.036	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2437MHz (CDD Mode)	

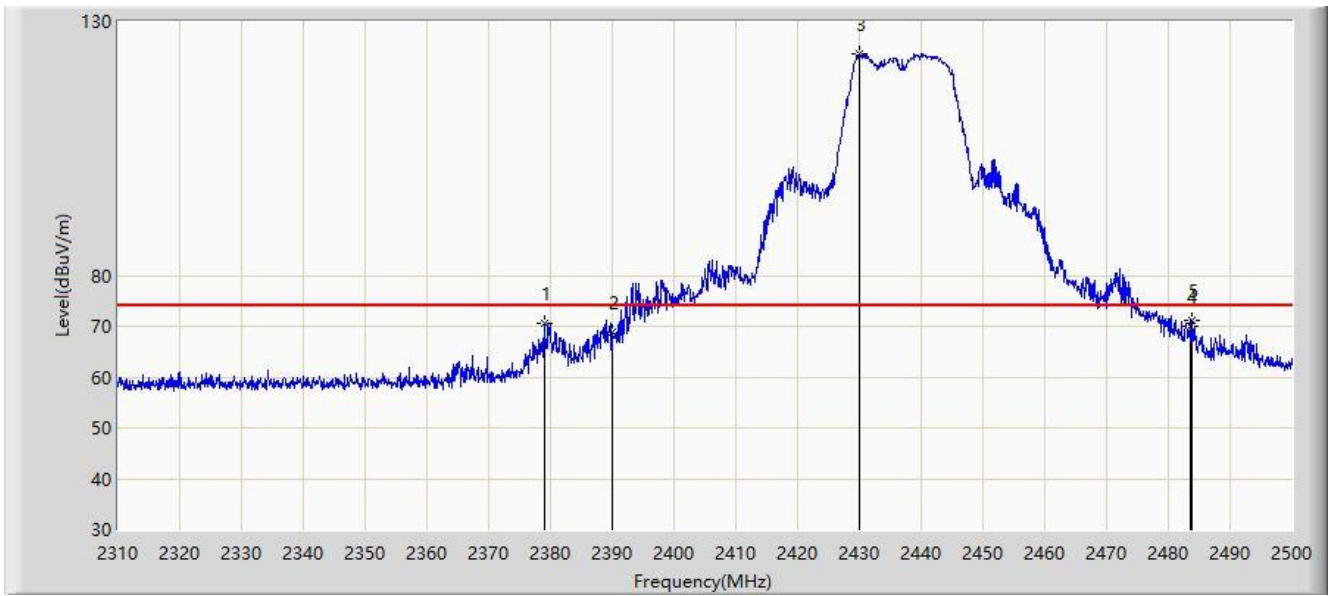


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.970	70.554	37.984	-3.446	74.000	32.570	PK
2			2390.000	68.903	36.349	-5.097	74.000	32.554	PK
3		*	2430.080	123.636	91.132	N/A	N/A	32.504	PK
4			2483.500	69.881	37.300	-4.119	74.000	32.580	PK
5			2483.850	71.245	38.663	-2.755	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2437MHz (CDD Mode)	

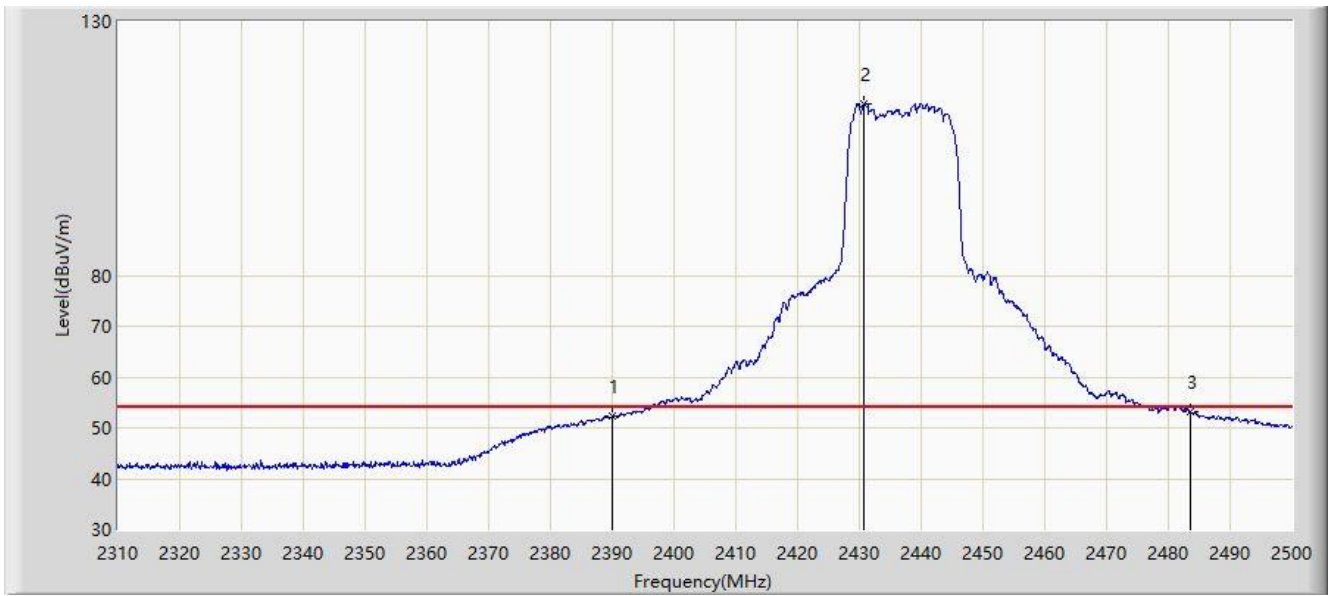


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.407	19.853	-1.593	54.000	32.554	AV
2		*	2430.745	113.708	81.205	N/A	N/A	32.503	AV
3			2483.500	53.282	20.701	-0.718	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2452MHz (CDD Mode)	

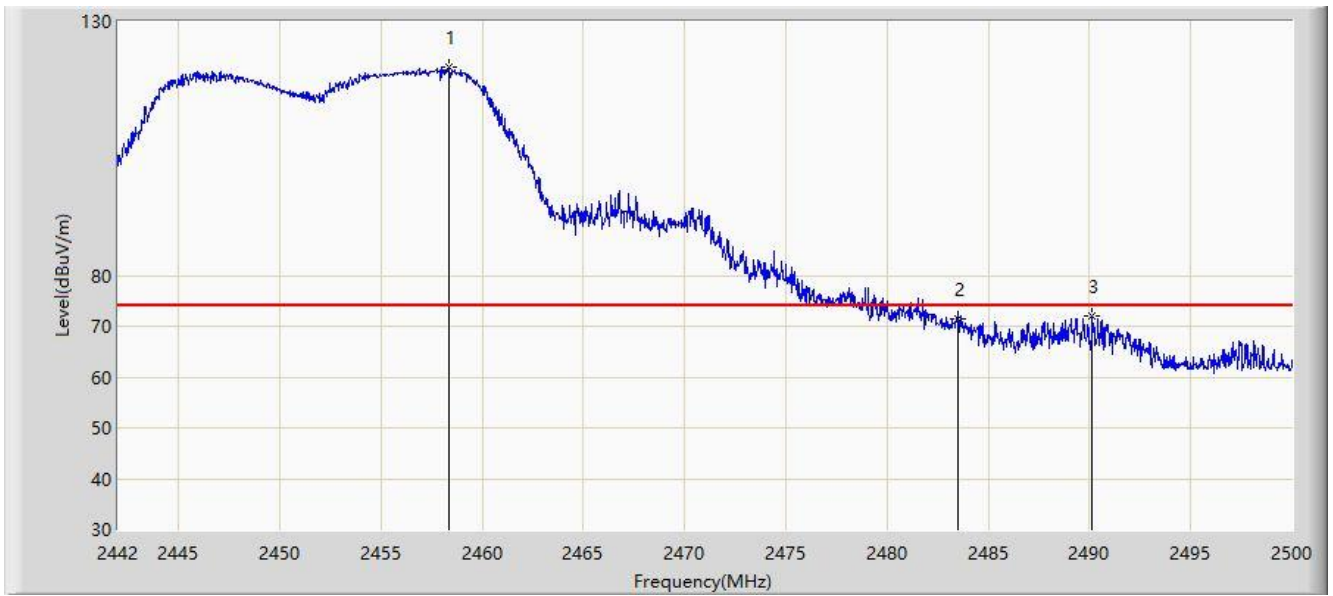


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.356	121.120	88.610	N/A	N/A	32.510	PK
2			2483.500	71.488	38.907	-2.512	74.000	32.580	PK
3			2490.140	71.963	39.363	-2.037	74.000	32.600	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2452MHz (CDD Mode)	

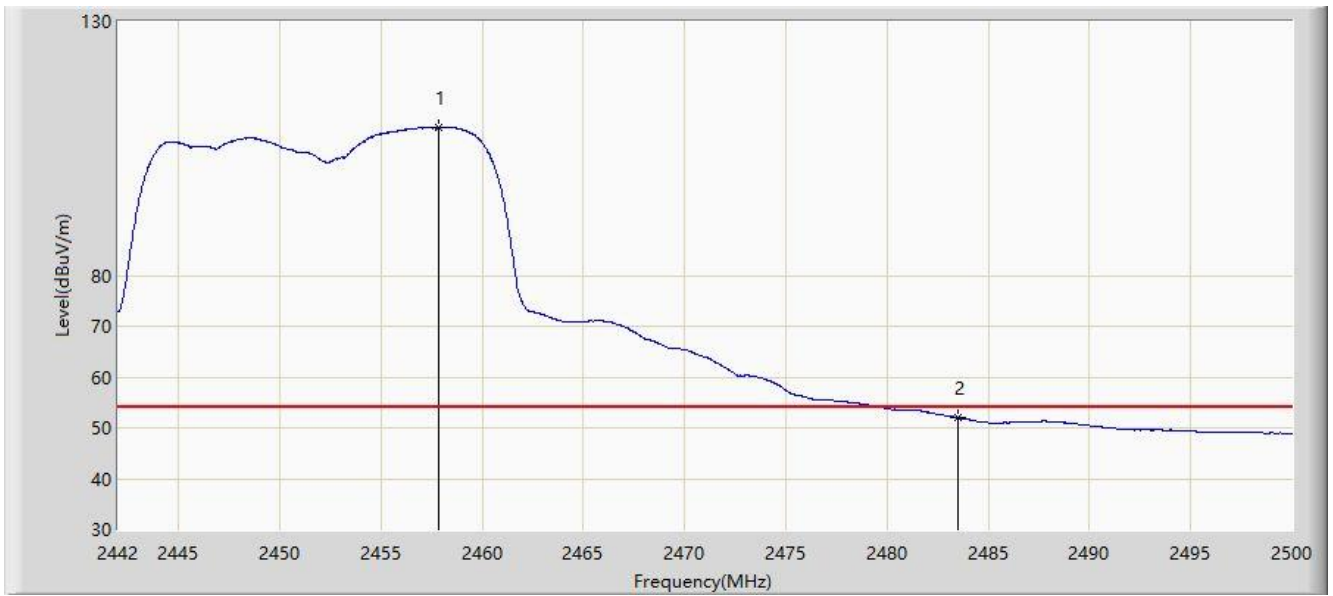


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.834	109.134	76.625	N/A	N/A	32.509	AV
2			2483.500	51.992	19.411	-2.008	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2452MHz (CDD Mode)	

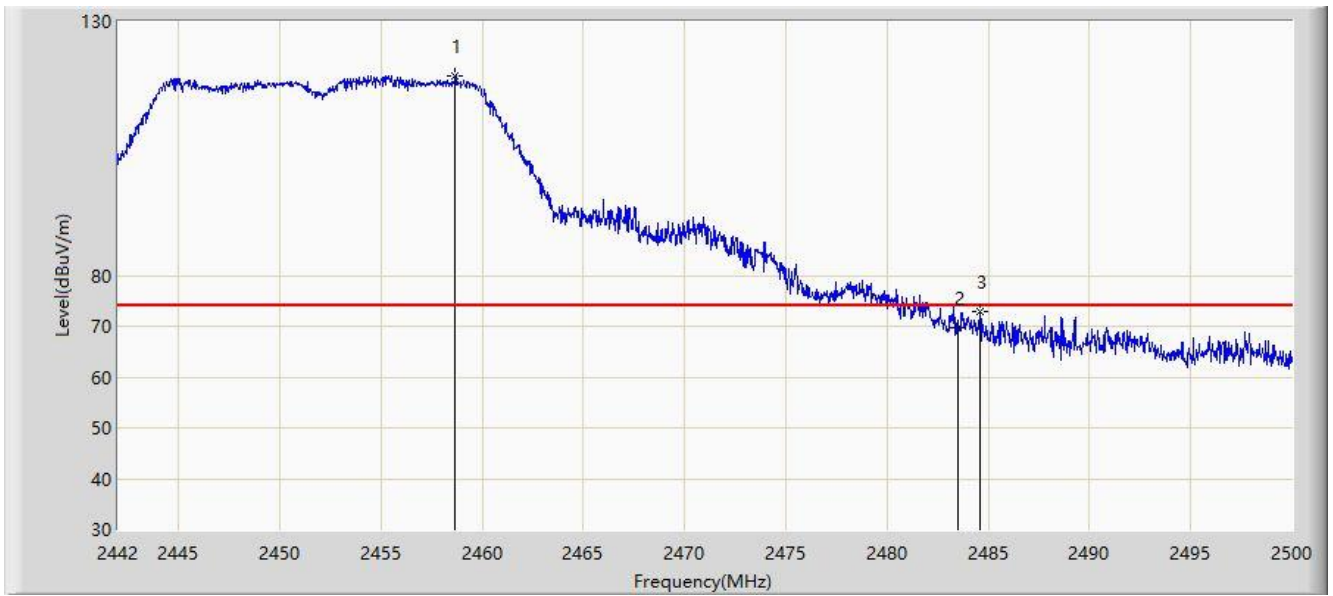


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.675	119.293	86.783	N/A	N/A	32.510	PK
2			2483.500	69.792	37.211	-4.208	74.000	32.580	PK
3			2484.601	72.811	40.227	-1.189	74.000	32.584	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2452MHz (CDD Mode)	

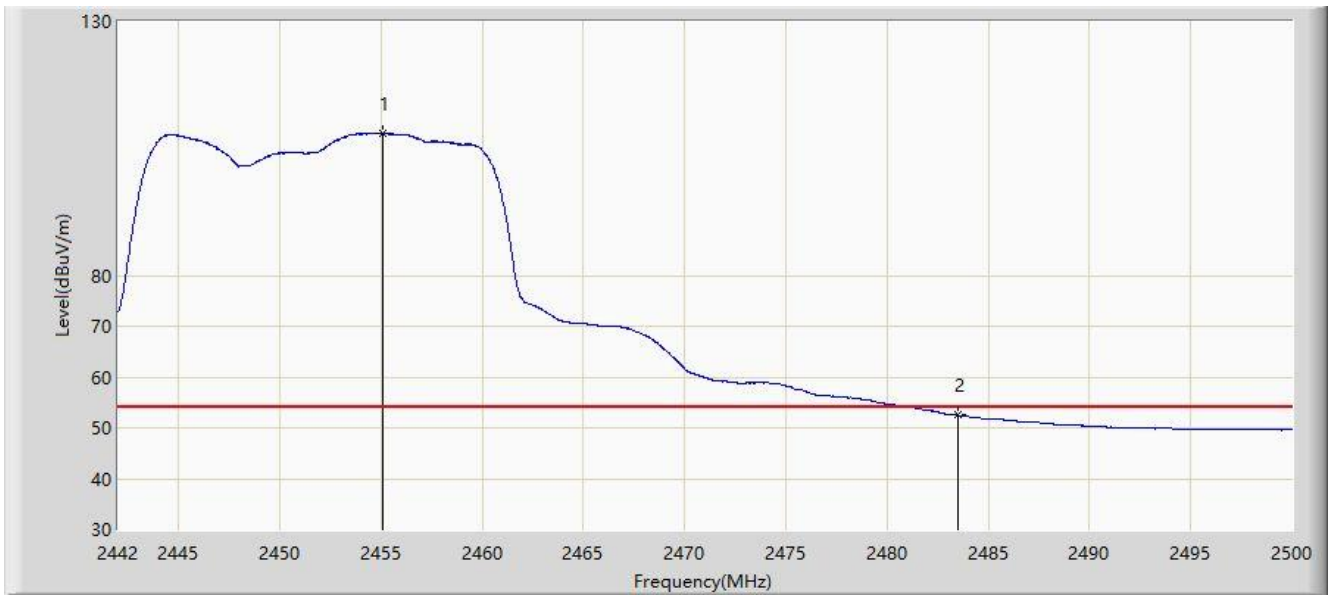


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.050	107.981	75.477	N/A	N/A	32.504	AV
2			2483.500	52.495	19.914	-1.505	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2457MHz (CDD Mode)	

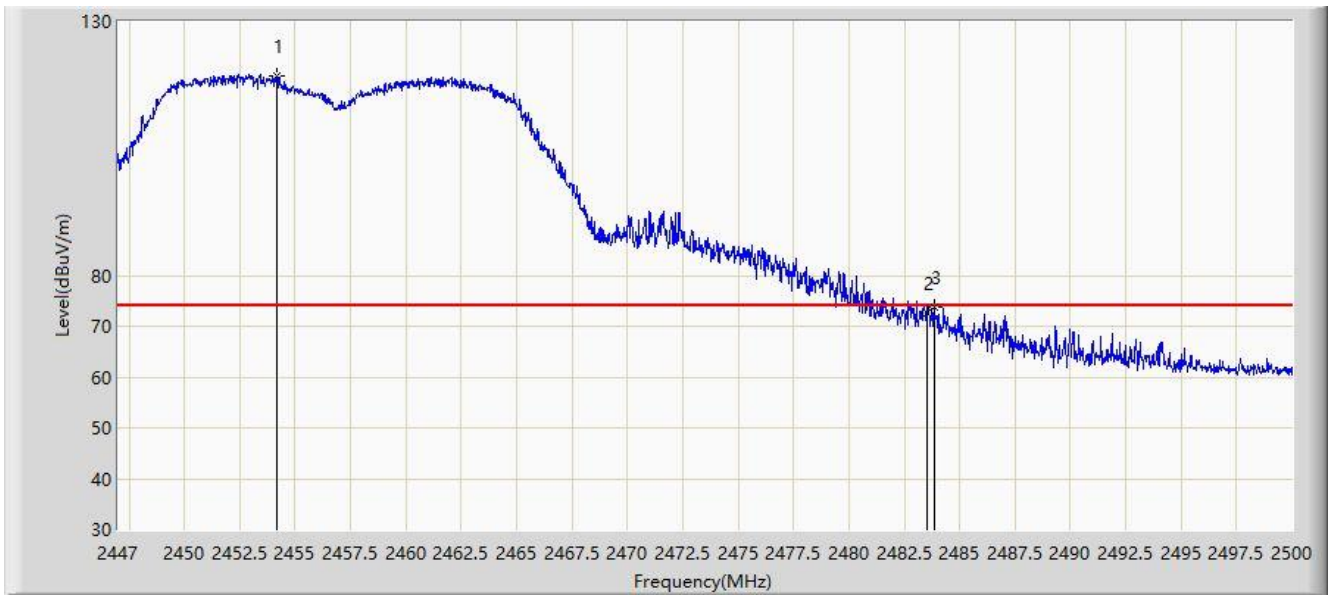


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.155	119.384	86.881	N/A	N/A	32.502	PK
2			2483.500	72.552	39.971	-1.448	74.000	32.580	PK
3			2483.862	73.766	41.184	-0.234	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2457MHz (CDD Mode)	

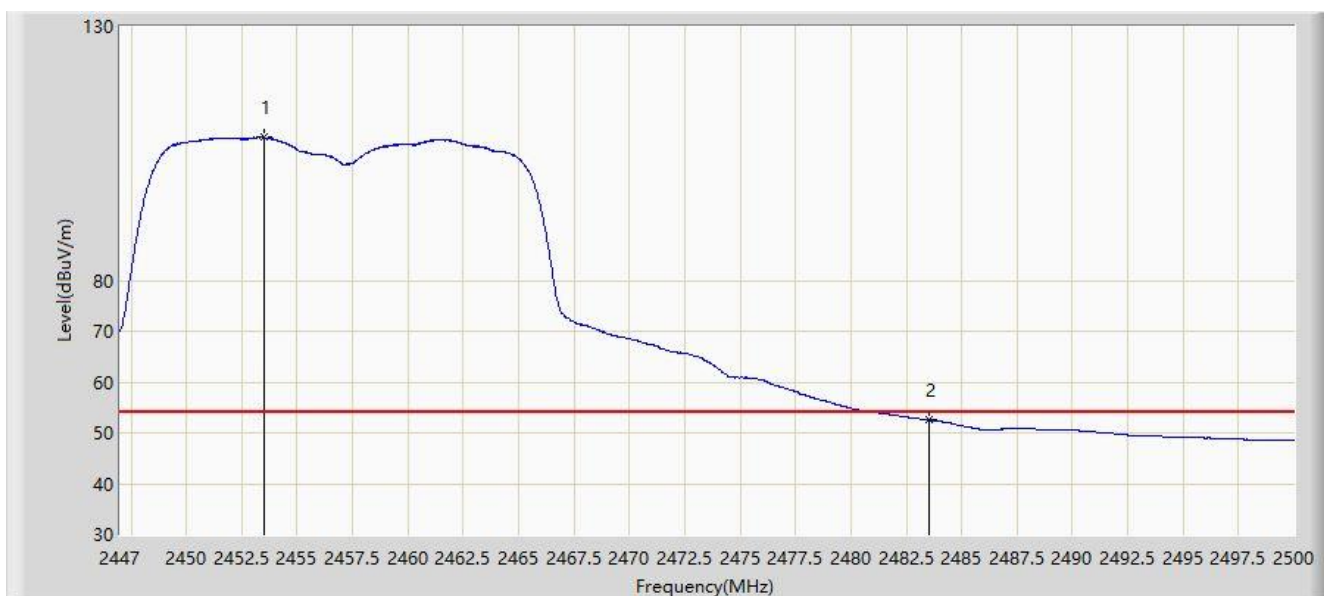


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.519	108.131	75.630	N/A	N/A	32.501	AV
2			2483.500	52.569	19.988	-1.431	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2457MHz (CDD Mode)	

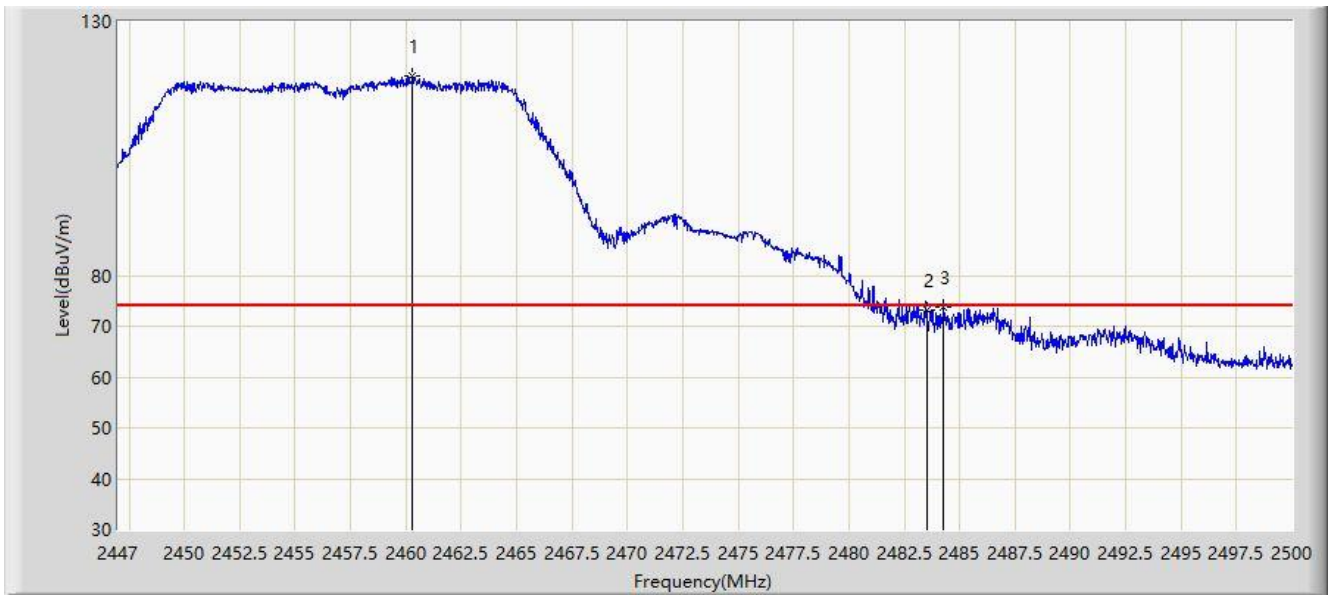


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.303	119.153	86.640	N/A	N/A	32.513	PK
2			2483.500	73.296	40.715	-0.704	74.000	32.580	PK
3			2484.285	73.911	41.328	-0.089	74.000	32.583	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2457MHz (CDD Mode)	

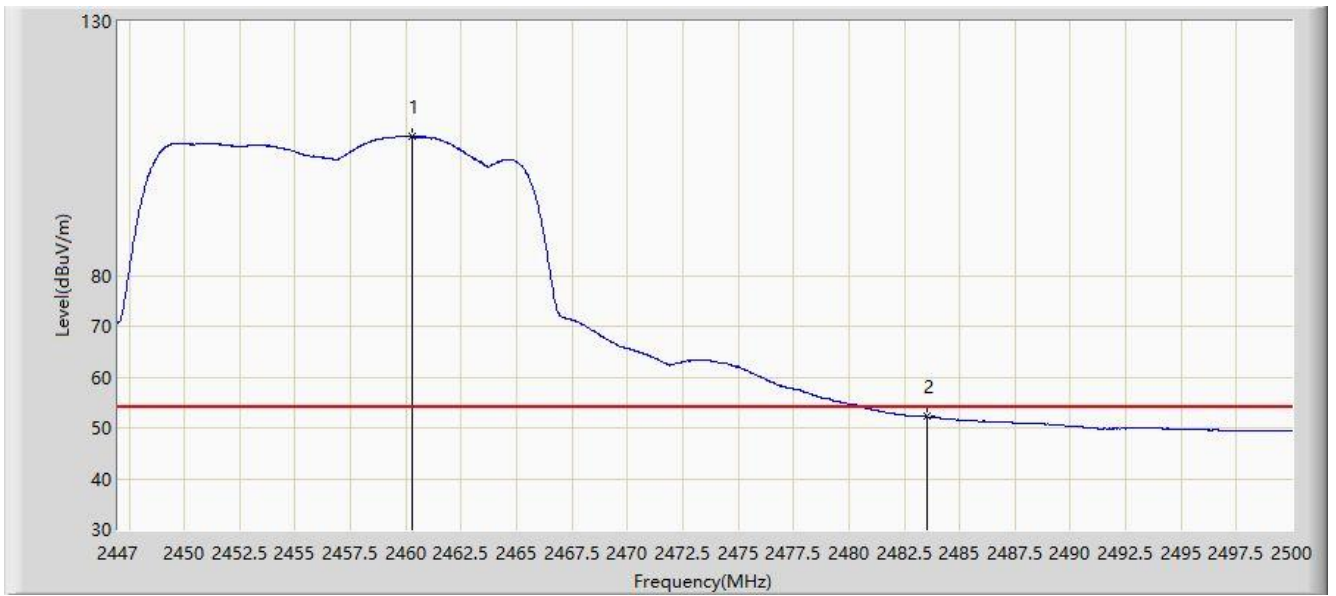


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.250	107.419	74.906	N/A	N/A	32.513	AV
2			2483.500	52.206	19.625	-1.794	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2462MHz (CDD Mode)	

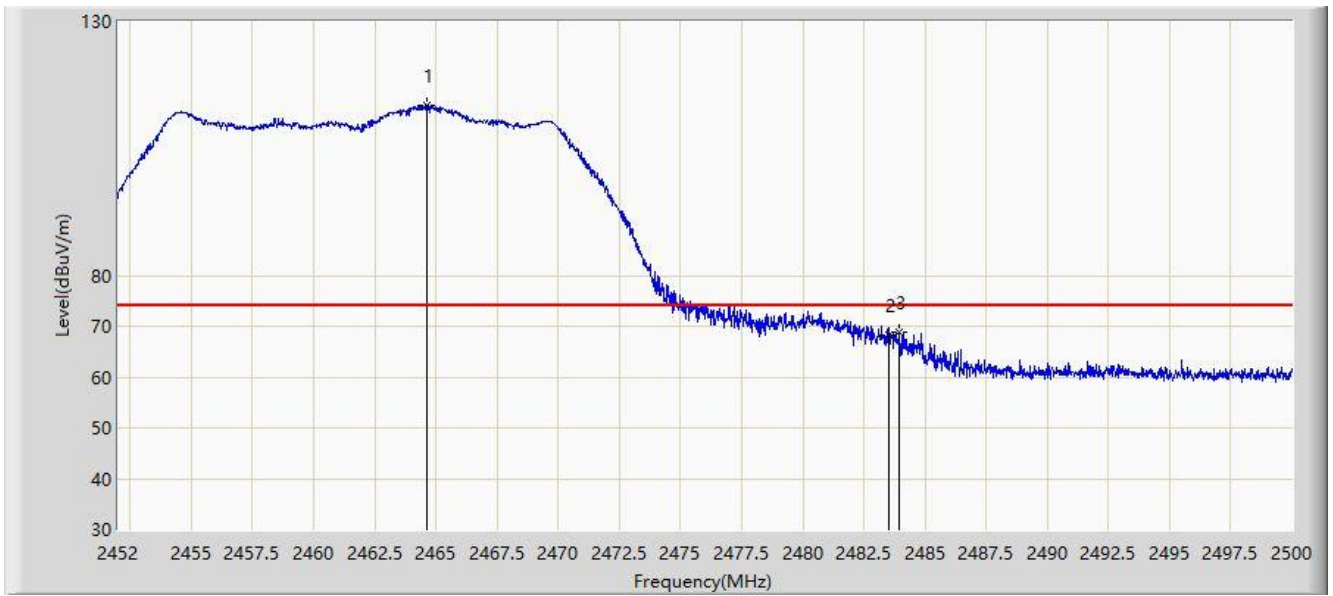


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.648	113.410	80.886	N/A	N/A	32.524	PK
2			2483.500	68.284	35.703	-5.716	74.000	32.580	PK
3			2483.944	68.858	36.276	-5.142	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2462MHz (CDD Mode)	

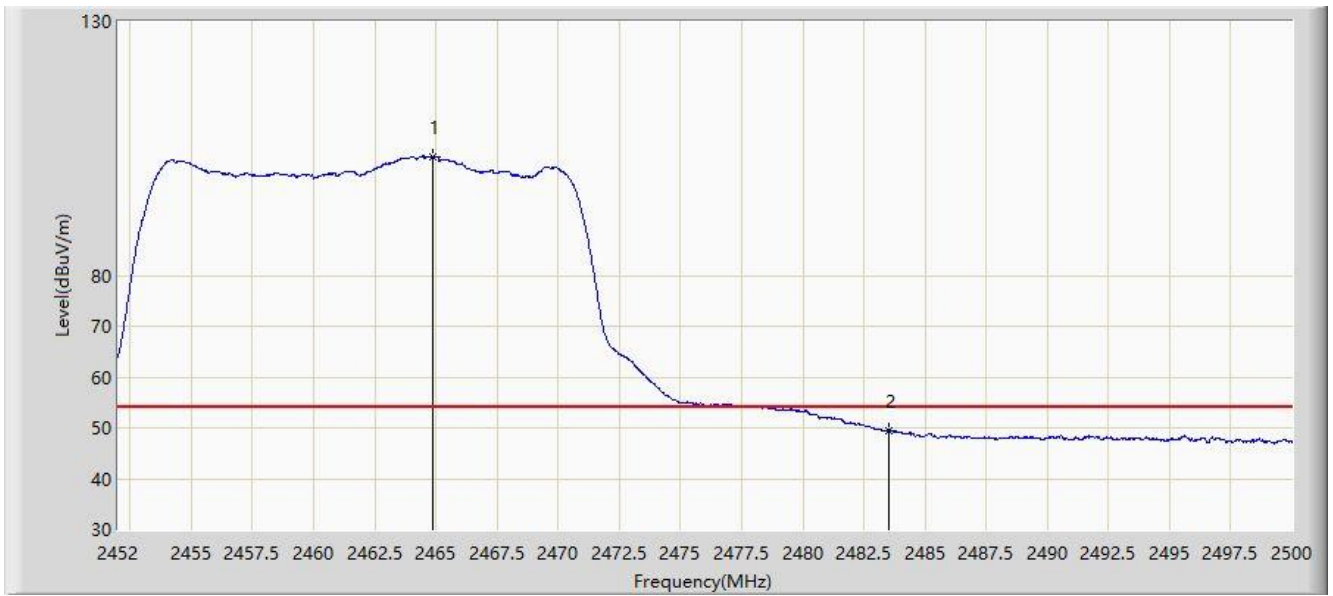


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.888	103.471	70.946	N/A	N/A	32.525	AV
2			2483.500	49.563	16.982	-4.437	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2462MHz (CDD Mode)	

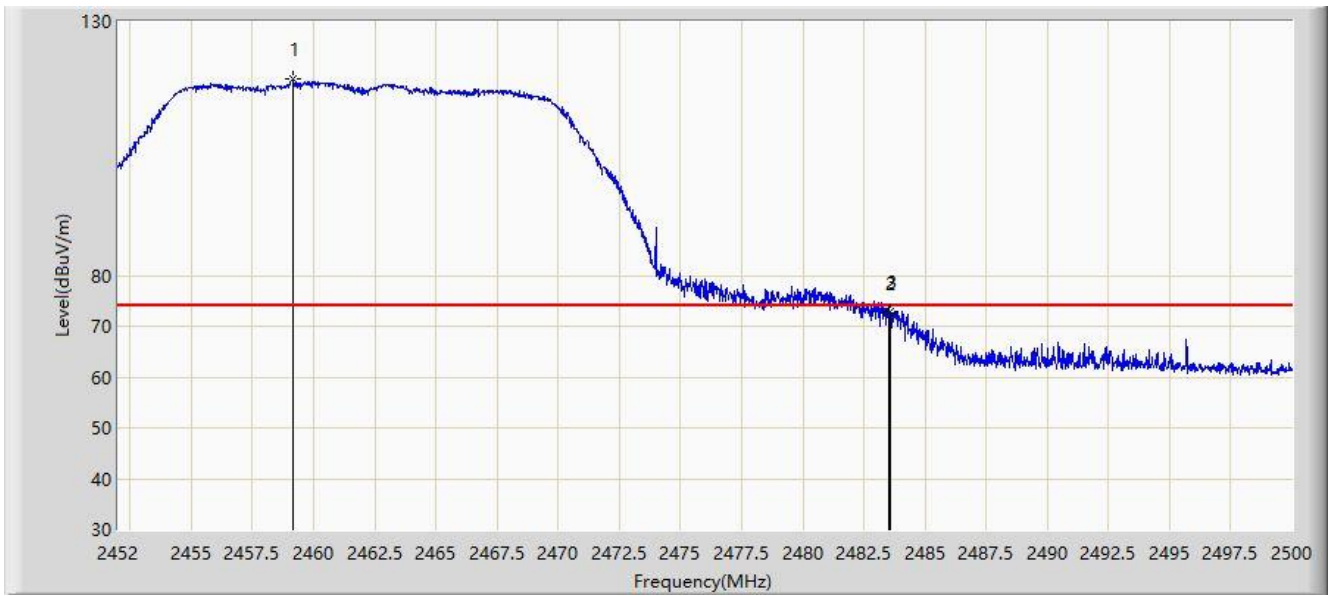


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.176	118.612	86.101	N/A	N/A	32.511	PK
2			2483.500	72.640	40.059	-1.360	74.000	32.580	PK
3			2483.560	73.006	40.425	-0.994	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11g at Channel 2462MHz (CDD Mode)	

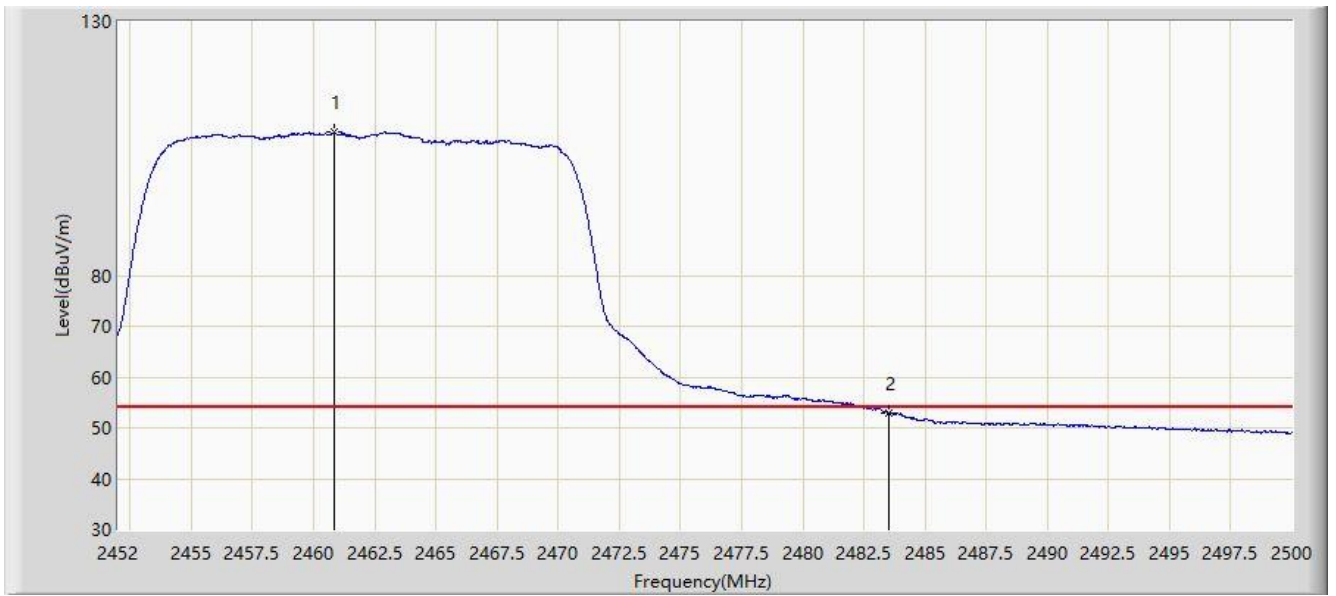


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.856	108.137	75.623	N/A	N/A	32.514	AV
2			2483.500	52.962	20.381	-1.038	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	

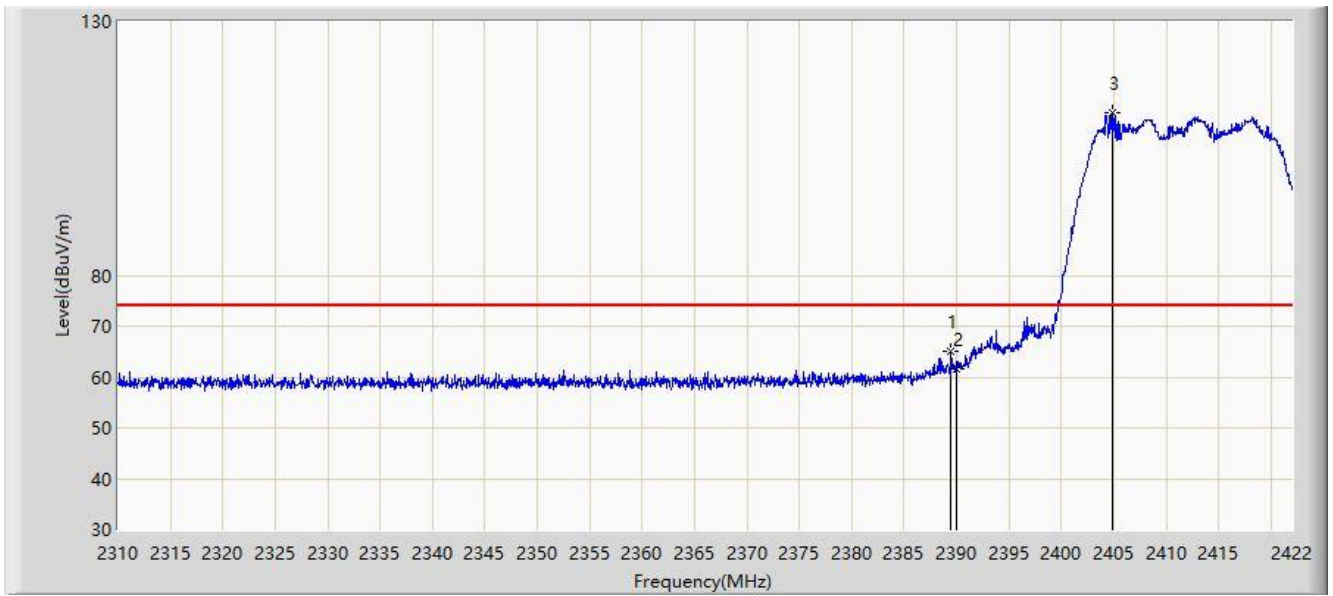


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.464	65.100	32.545	N/A	N/A	32.555	PK
2			2390.000	61.728	29.174	-12.272	74.000	32.554	PK
3		*	2404.864	111.947	79.412	37.947	74.000	32.535	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	

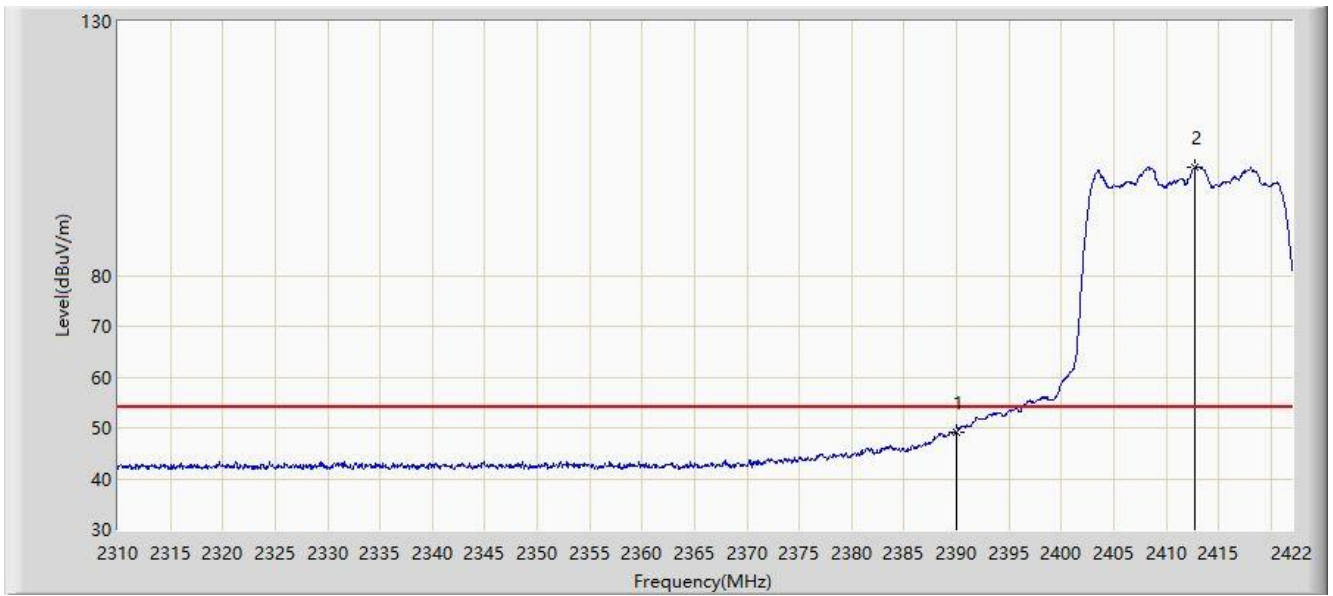


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.225	16.671	-4.775	54.000	32.554	AV
2		*	2412.760	101.295	68.770	N/A	N/A	32.525	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	

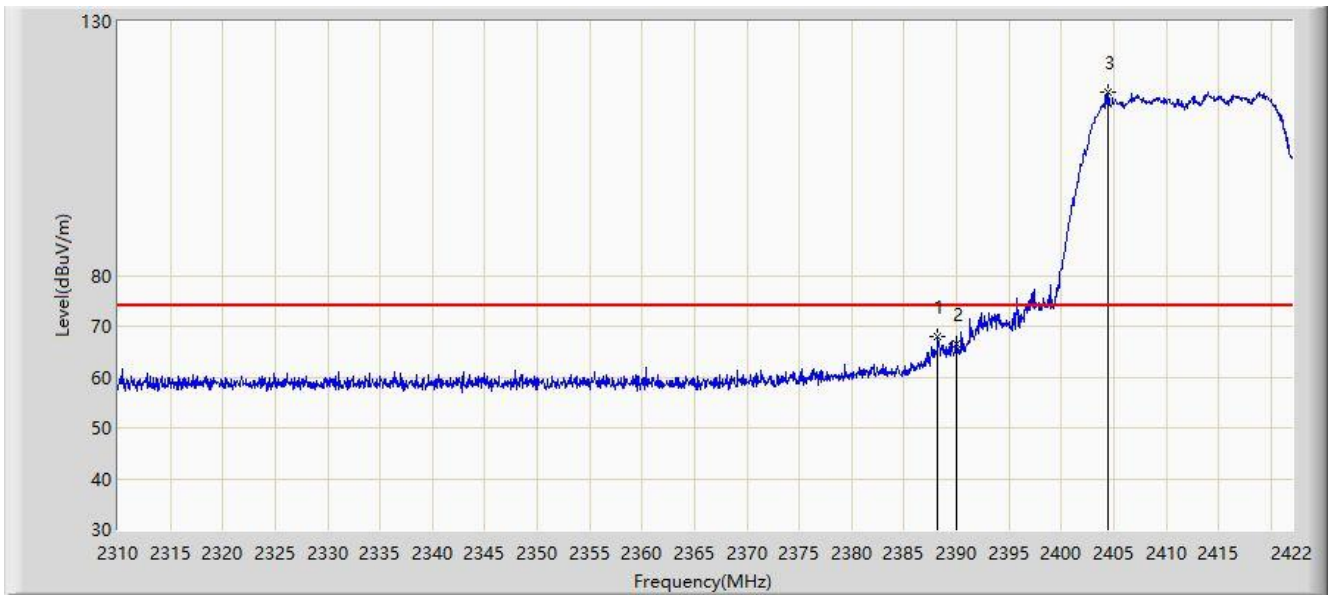


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.176	67.969	35.412	-6.031	74.000	32.557	PK
2			2390.000	66.488	33.934	-7.512	74.000	32.554	PK
3		*	2404.472	116.157	83.622	N/A	N/A	32.535	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	

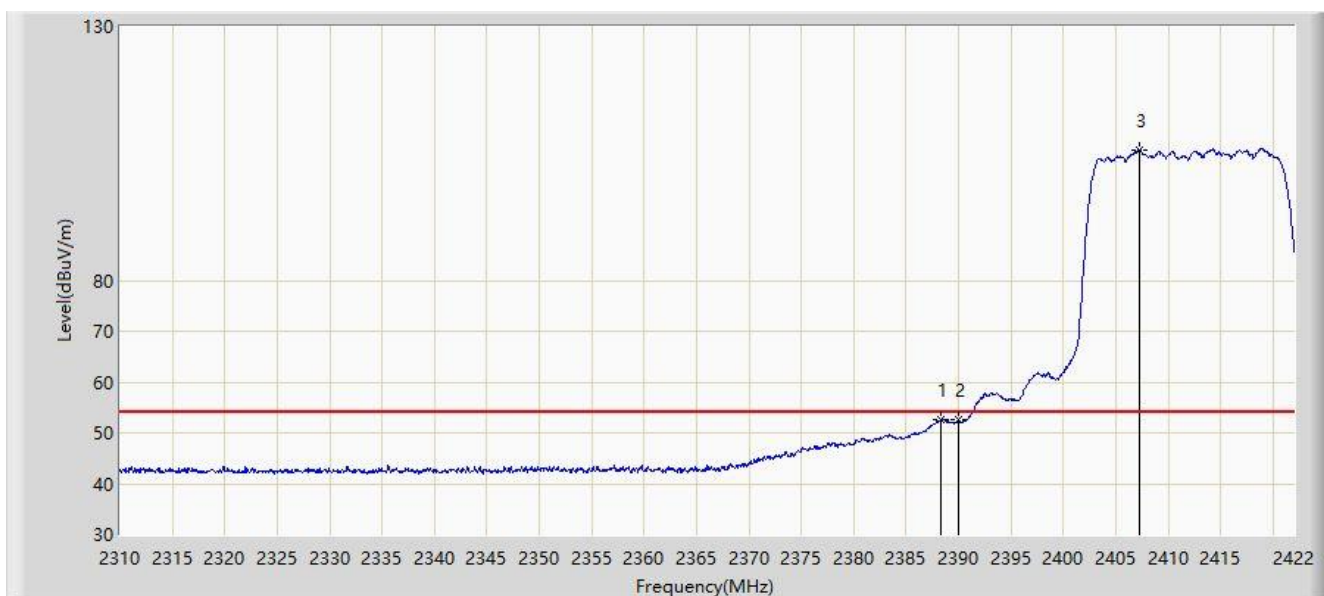


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.288	52.589	20.032	-1.411	54.000	32.557	AV
2			2390.000	52.510	19.956	-1.490	54.000	32.554	AV
3		*	2407.216	105.751	73.219	N/A	N/A	32.531	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 07:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2417MHz (CDD Mode)	

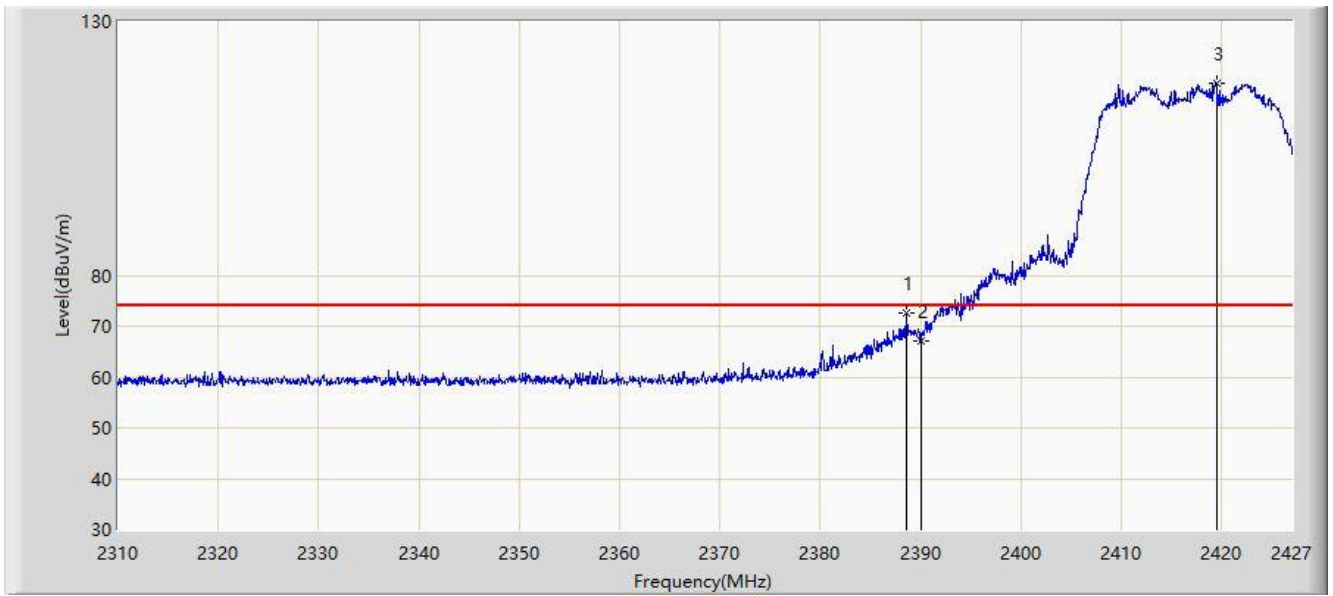


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.565	72.590	40.034	-1.410	74.000	32.556	PK
2			2390.000	67.161	34.607	-6.839	74.000	32.554	PK
3		*	2419.454	117.735	85.218	N/A	N/A	32.517	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 07:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2417MHz (CDD Mode)	

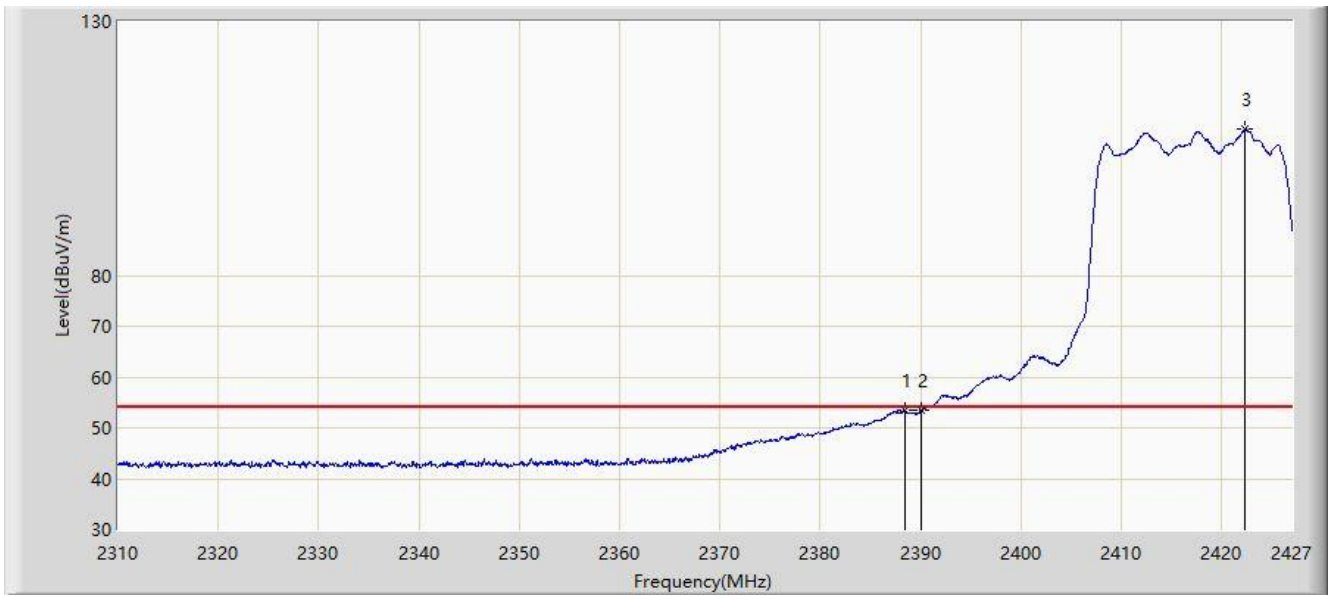


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.448	53.485	20.928	-0.515	54.000	32.556	AV
2			2390.000	53.367	20.813	-0.633	54.000	32.554	AV
3		*	2422.378	108.807	76.294	N/A	N/A	32.514	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2417MHz (CDD Mode)	

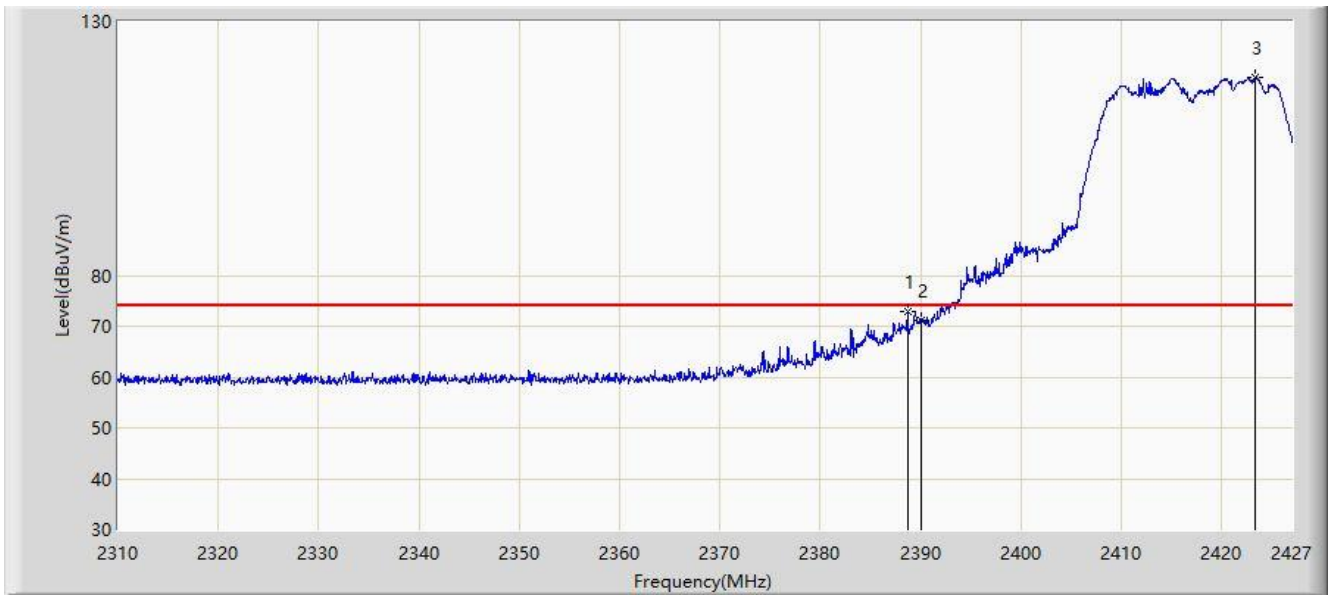


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.741	72.820	40.264	-1.180	74.000	32.557	PK
2			2390.000	71.272	38.718	-2.728	74.000	32.554	PK
3		*	2423.373	119.009	86.497	N/A	N/A	32.512	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 06:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2417MHz (CDD Mode)	

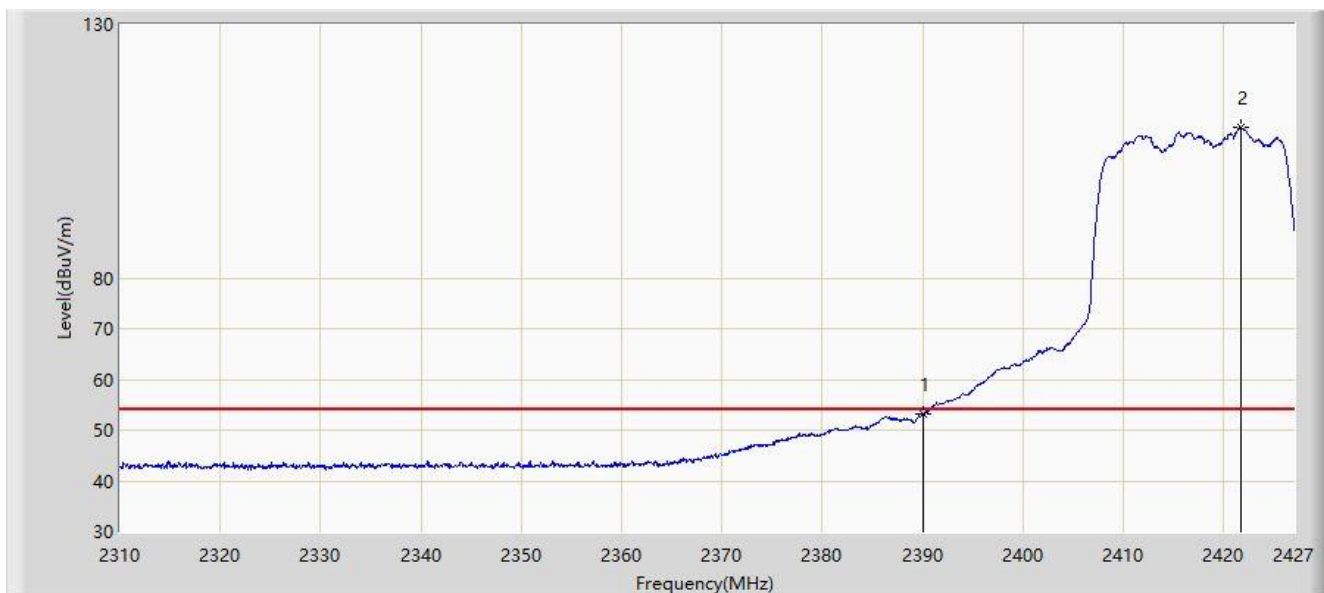


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.225	20.671	-0.775	54.000	32.554	AV
2		*	2421.735	109.792	77.278	N/A	N/A	32.514	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 07:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2422MHz (CDD Mode)	

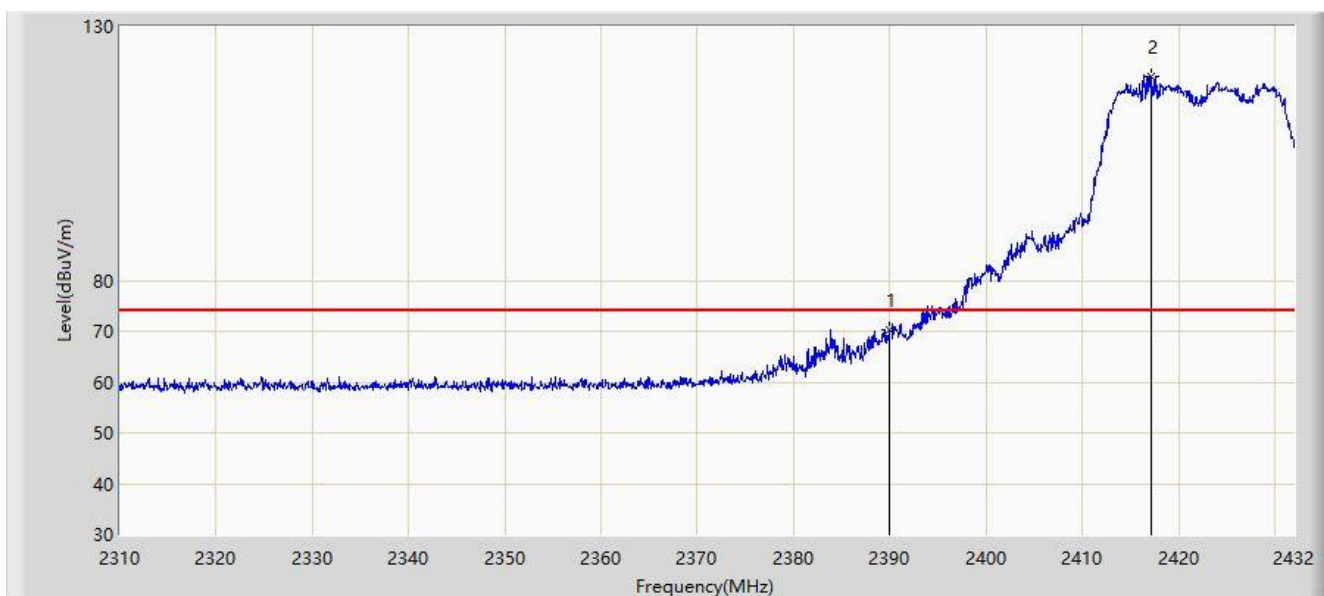


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	70.366	37.812	-3.634	74.000	32.554	PK
2		*	2417.116	120.225	87.706	N/A	N/A	32.519	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 07:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2422MHz (CDD Mode)	

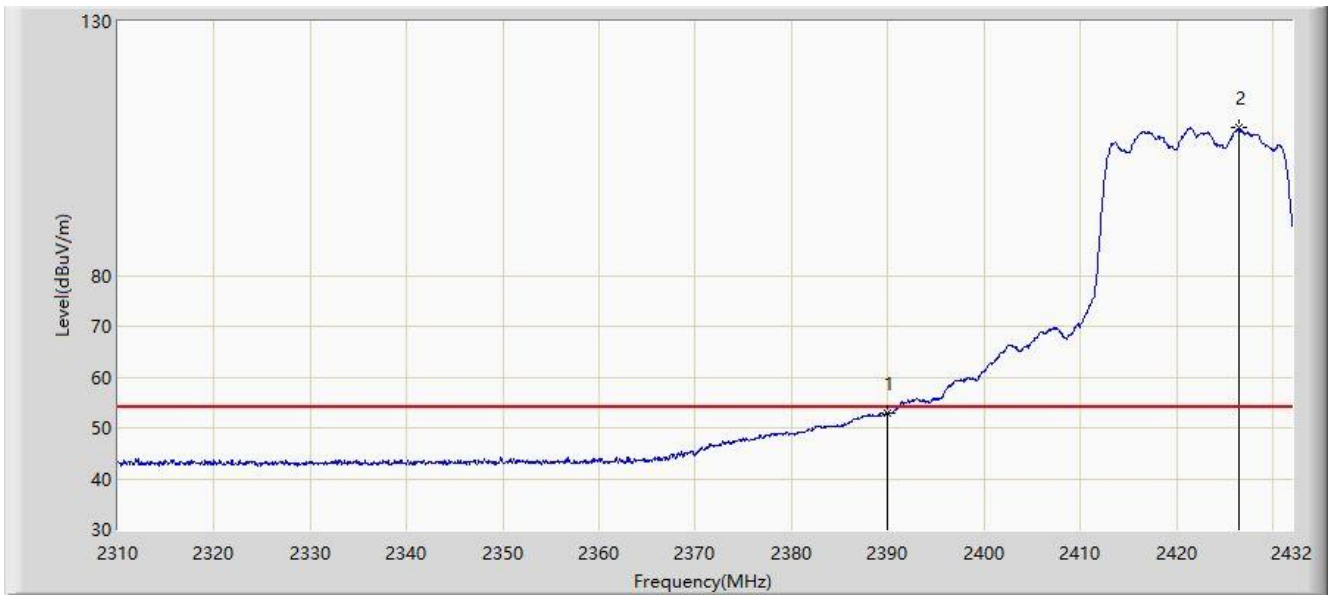


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.795	20.241	-1.205	54.000	32.554	AV
2		*	2426.449	109.040	76.532	N/A	N/A	32.509	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 07:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2422MHz (CDD Mode)	

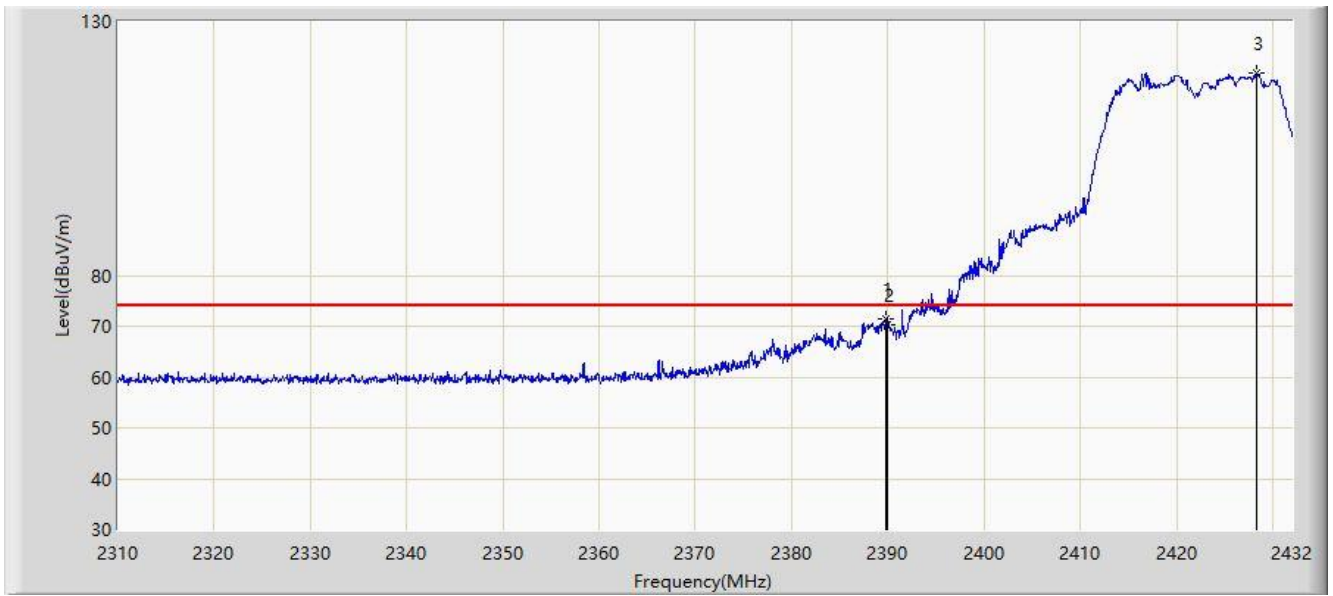


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.788	71.325	38.770	-2.675	74.000	32.555	PK
2			2390.000	70.279	37.725	-3.721	74.000	32.554	PK
3		*	2428.279	119.897	87.391	N/A	N/A	32.506	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 07:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2422MHz (CDD Mode)	

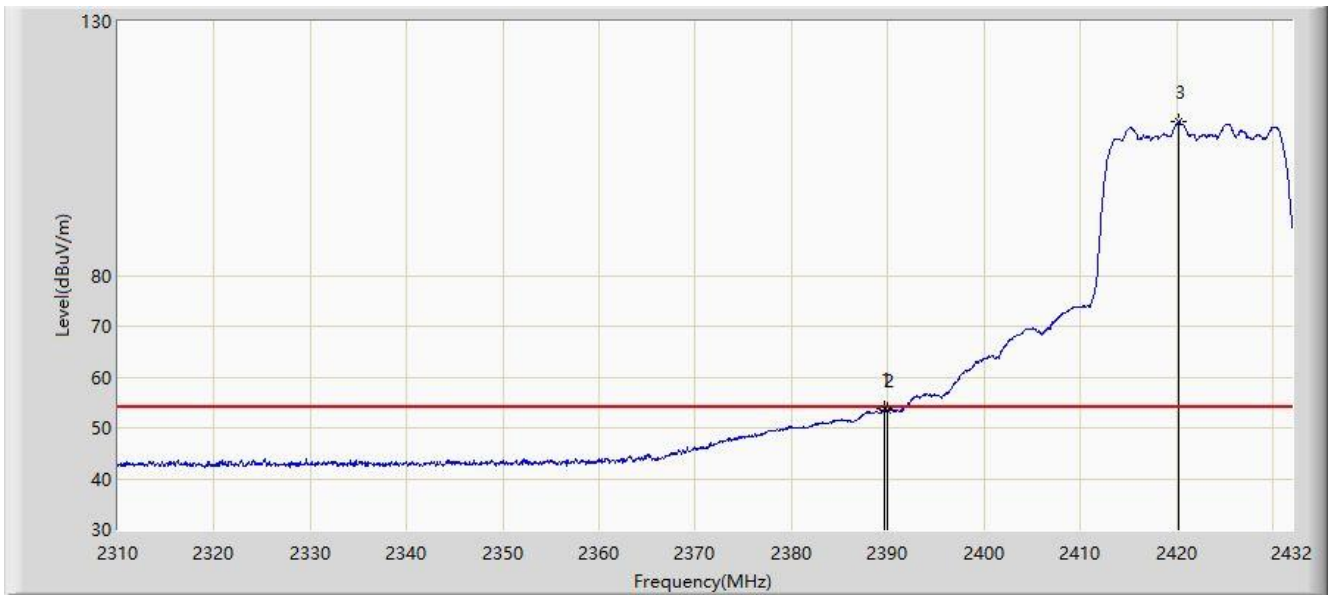


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.727	53.785	21.230	-0.215	54.000	32.555	AV
2			2390.000	53.580	21.026	-0.420	54.000	32.554	AV
3		*	2420.288	110.334	77.818	N/A	N/A	32.516	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	

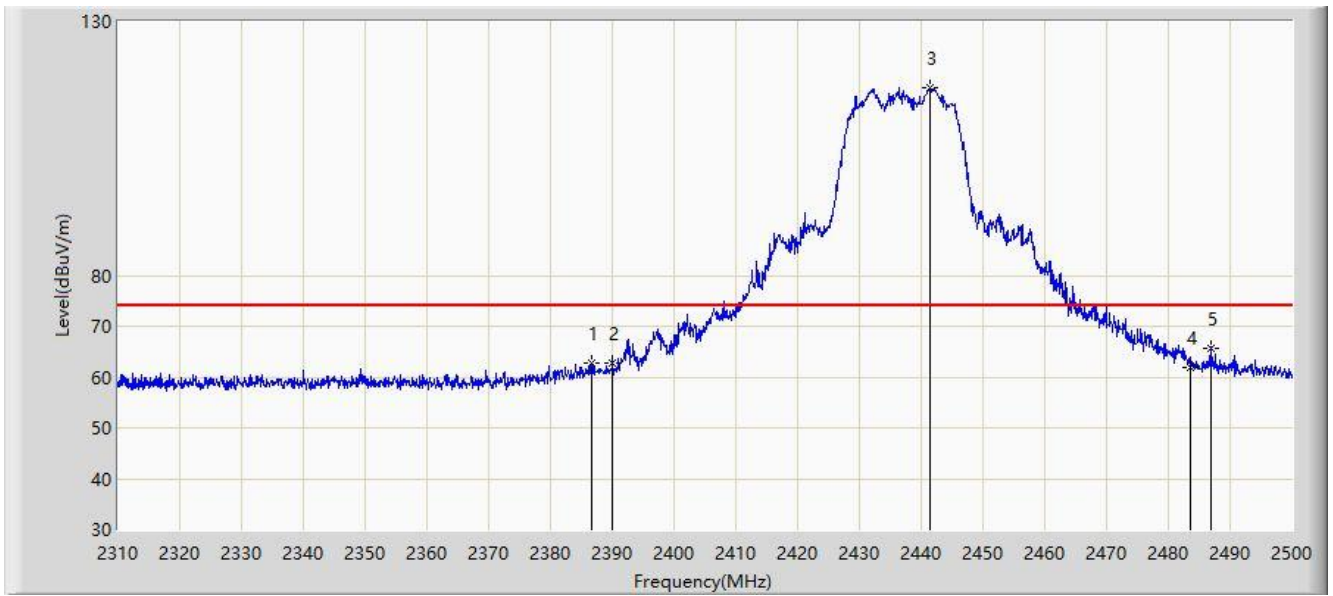


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.665	62.854	30.295	-11.146	74.000	32.559	PK
2			2390.000	62.624	30.070	-11.376	74.000	32.554	PK
3		*	2441.385	117.088	84.597	N/A	N/A	32.491	PK
4			2483.500	61.962	29.381	-12.038	74.000	32.580	PK
5			2486.985	65.797	33.206	-8.203	74.000	32.591	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	

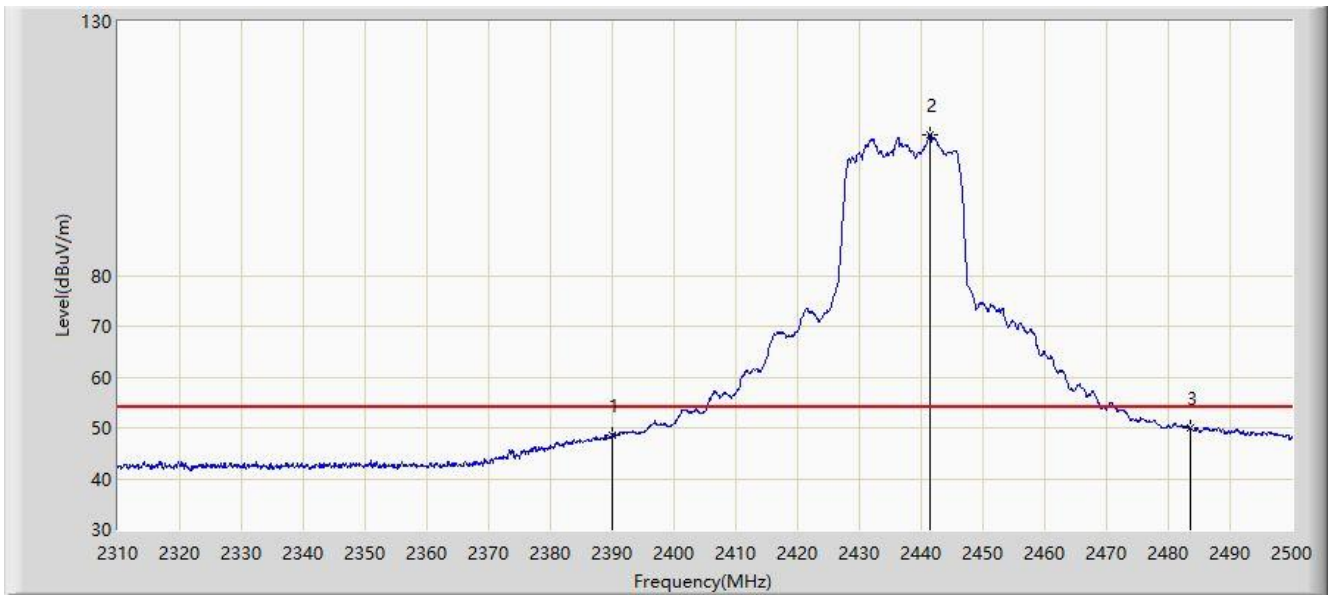

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.694	16.140	-5.306	54.000	32.554	AV
2		*	2441.385	107.720	75.229	N/A	N/A	32.491	AV
3			2483.500	49.922	17.341	-4.078	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.325	68.758	36.203	-5.242	74.000	32.555	PK
2			2390.000	67.382	34.828	-6.618	74.000	32.554	PK
3		*	2441.480	122.271	89.780	N/A	N/A	32.490	PK
4			2483.500	65.711	33.130	-8.289	74.000	32.580	PK
5			2486.035	67.777	35.189	-6.223	74.000	32.588	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/24 - 00:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	

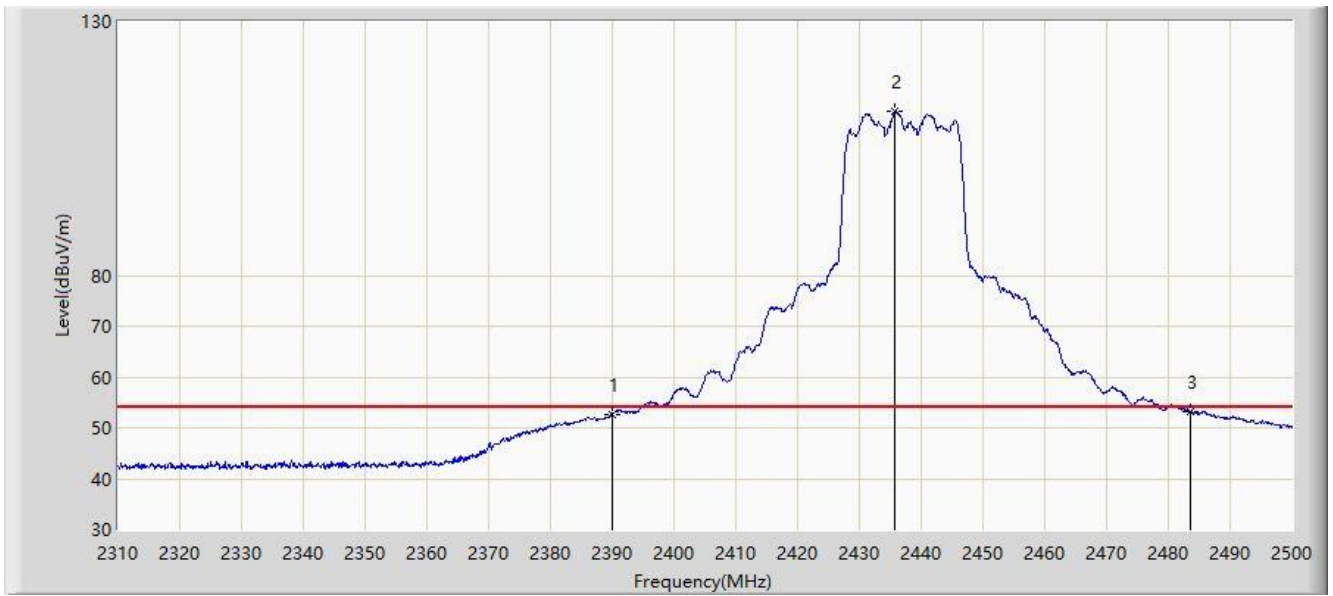

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.741	20.187	-1.259	54.000	32.554	AV
2		*	2435.780	112.370	79.873	N/A	N/A	32.497	AV
3			2483.500	53.099	20.518	-0.901	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 07:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2452MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2444.813	119.063	86.576	N/A	N/A	32.486	PK
2			2483.500	67.193	34.612	-6.807	74.000	32.580	PK
3			2483.992	70.637	38.055	-3.363	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/11/28 - 07:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO 三頻電競路由器	Power: AC 110V/60Hz
測試模式 Transmit by 802.11n-HT20 at Channel 2452MHz (CDD Mode)	

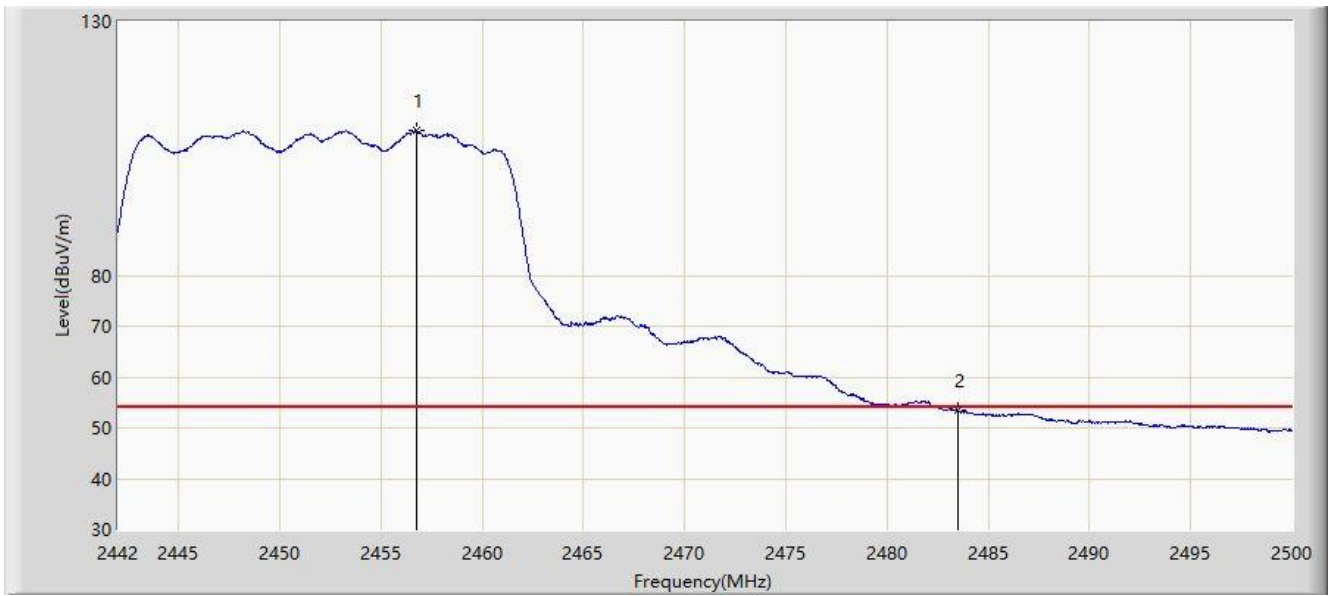

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.761	108.424	75.917	N/A	N/A	32.507	AV
2			2483.500	53.497	20.916	-0.503	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)