



TEST REPORT

Test item description: LED Display

Trademark(s): N/A

Model/Type reference: X181P-83PR B

Applicant's name: Shenzhen Qi'ang Optoelectronics Technology Co., Ltd.

Address: Room C341, Building B, Xinhang Science and Technology Park, No. 229 Qingshui Road, Wulian Community, Longgang Subdistrict, Longgang District, Shenzhen

Manufacturer: Shenzhen Qi'ang Optoelectronics Technology Co., Ltd.

Address: Room C341, Building B, Xinhang Science and Technology Park, No. 229 Qingshui Road, Wulian Community, Longgang Subdistrict, Longgang District, Shenzhen

Prepared By: Shenzhen CTB Testing Technology Co., Ltd.

Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: May. 11, 2026

Sample tested Date: May. 11, 2026 to May. 29, 2026

Issue Date: May. 29, 2026

Report No.: CTB26051105401RF01

Test Standards: MIC Public Notice 88:2004, annex 1 and annex 43
Ordinance Article 2 paragraph 1 item (19)
ARIB STD-T66 V3.7

Test Results: PASS

Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Martin Feng

Kai ChenMartin FengBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. The tested sample(s) and the sample information are provided by the applicant. The authenticity, accuracy, and completeness of the provided information are the sole responsibility of the applicant. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The result decision rules of our laboratory are based solely on the direct comparison between the actual measured values of test results and the standard limits, without considering the measurement uncertainty. "★" indicates the testing items were fulfilled by subcontracted lab. "△" indicates the items are not in CNAS accreditation scope.

Table of Contents	Page
1 . TEST SUMMARY	5
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 Carrier Frequency of Channels	9
2.3 Table for Filed Antenna	9
2.4 DESCRIPTION OF TEST MODES	10
2.5 TESTCONDITIONS	10
2.6 DESCRIPTION OF SUPPORT UNITS (CONDUCTEDMODE)	11
2.7 MEASUREMENT INSTRUMENTS LIST	12
3 . RF SHIELDINGMETHOD	14
4 FREQUENCYERROR	15
4.1 LIMIT	15
4.2 MEASURING INSTRUMENTS AND SETTING	15
4.3 TEST PROCEDURE	15
4.4 TEST SETUP LAYOUT	15
4.5 EUT OPERATION DURING TEST	15
4.6 TEST RESULT	16
5ANTENNAPOWER	19
5.1 LIMIT	19
5.2 MEASURING INSTRUMENTS AND SETTING	19
5.3 TEST PROCEDURE	19
5.4 TEST SETUP LAYOUT	20
5.5 TEST RESULT	20
6 OCCUPIEDBANDWITH and Spread Factor	21
6.1 LIMIT	21
6.2 MEASURING INSTRUMENTS AND SETTING	21
6.3 TEST PROCEDURE	21
6.4 TEST SETUP LAYOUT	21
6.5 EUT OPERATION DURING TEST	21
6.6 TEST RESULT	22
7 UNWANTED EMISSION INTENSITY MEASUREMENT	31
7.1 LIMIT	31
7.2 MEASURING INSTRUMENTS AND SETTING	31

Table of Contents	Page
7.3 TEST PROCEDURE	31
7.4 TEST SETUP LAYOUT	32
7.5 TEST RESULT	32
8 UNWANTED EMISSION INTENSITY MEASUREMENT	61
8.1 LIMIT	61
8.2 MEASURING INSTRUMENTS AND SETTING	61
8.3 TEST PROCEDURE	61
8.4 TEST RESULT	62
9 TRANSMISSION ANTENNA GAIN (EIRP ANTENNA POWER) MEASUREMENT	70
9.1 LIMIT	70
9.2 MEASURING INSTRUMENTS AND SETTING	70
9.3 TEST PROCEDURE	70
9.4 TEST SETUP LAYOUT	71
9.5 EUT OPERATION DURING TEST	71
9.6 TEST RESULT	71
10 TRANSMISSION RADIATION ANGLE WIDTH (3DB BEAMWIDTH) MEASUREMENT	73
10.1 LIMIT	73
10.2 MEASURING INSTRUMENTS AND SETTING	73
10.3 TEST PROCEDURE	73
10.4 TEST SETUP LAYOUT	74
10.5 EUT OPERATION DURING TEST	74
10.6 TEST RESULT	74
11 RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT	75
11.1 LIMIT	75
11.2 MEASURING ID CODE SOFTWARE	75
11.3 TEST PROCEDURE	75
11.4 TEST SETUP LAYOUT	75
11.5 EUT OPERATION DURING TEST	75
11.6 TEST RESULT	75
12 CARRIER SENSING FUNCTION	76
12.1 TEST REQUIREMENT	76
12.2 BLOCK DIAGRAM OF TEST SETUP	76
12.3 TEST PROCEDURE	76

Table of Contents	Page
12.4 TEST RESULT	76
13 NUMBER OF CARRIERS	77
14 EUT TEST PHOTO	78



1. TEST SUMMARY

1.1Version

Report No.	Issue Date	Description	Approved
CTB26051105401RF01	May. 29, 2026	Original	Valid

1.2 TEST PROCEDURES AND RESULTS

Part	Rule Section	Description of Test	Result
4.1	3	Frequency Error	Complies
4.3	4	Occupied Bandwidth (99%), Spread-spectrum Bandwidth (90%) and Spread Factor	Complies
4.4	5	Unwanted Emission Intensity	Complies
4.2	6	Antenna Power Error	Complies
4.5	7	Limitation of Collateral Emission of Receiver	Complies
4.6	8	Transmission Antenna Gain (EIRP Antenna Power)	Complies
4.7	9	Transmission Radiation Angle Width (3dB Beamwidth)	N/A
4.8	10	Radio Interference Prevention Capability	Complies
4.9	Note 2	Carrier Sense Capability	Complies
4.10	Note 3	Number of carriers	Complies

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) Note2: MIC Public Notice 88:2004, annex 1 and annex 43

(3) Note3: MIC Ordinance Regulating Radio Equipment Section 4.17 of Article 49.20

1.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Frequency Error	54.3Hz
Adjacent channel power below 1G	2.6dB
Adjacent channel power Above 1G	2.8dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63℃
frequency	1×10^{-7}

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Model/Type reference:	X181P-83PR B
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	IEEE 802.11b/g/n 20: 2412-2472MHz IEEE 802.11n 40: 2422-2462MHz
Type of Modulation:	802.11b: DSSS(CCK/DQPSK/DBPSK) 802.11g: OFDM(BPSK/QPSK/16QAM/64QAM) 802.11n (HT20/40)): OFDM (64QAM, 16QAM, QPSK, BPSK)
Rate Output power:	ANT 1+ANT2: 802.11b: 4mW/MHz 802.11g: 4mW/MHz 802.11n20: 6mW/MHz 802.11n40: 5mW/MHz
Antenna installation:	FPC antenna
Antenna Gain:	Ant 1: 4.36dBi Ant 2: 2.06dBi
Ratings:	Input:100-240V~50/60Hz 3.5A

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. This report is for Wi-Fi test report.

2.2 Carrier Frequency of Channels

Channel List for 802.11b/g/n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452	13	2472
02	2417	06	2437	10	2457	/	/
03	2422	07	2442	11	2462	/	/
04	2427	08	2447	12	2467	/	/

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
/	/	05	2432	09	2452	/	/
/	/	06	2437	10	2457	/	/
03	2422	07	2442	11	2462	/	/
04	2427	08	2447	/	/	/	/

Mode	Low channel (MHz)	Middle channel(MHz)	High channel(MHz)
b	2412	2442	2472
g	2412	2442	2472
n20	2412	2442	2472
N40	2422	2442	2462

2.3 Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain(dBi)	NOTE
1	N/A	2.4G Antenna	FPC antenna	4.36dBi	N/A
2	N/A	2.4G Antenna	FPC antenna	2.06dBi	N/A

2.4 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX
Mode 2	RX

2.5 TEST CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Supply Voltage				
	Adapter power V	Module input power V	Rated module power V	Tolerance (%)
Normal	100	5	5	
+10%	110	5	5	
-10%	90	5	5	
Others				
Temperature (°C)		20-25		
Relative humidity		54 %.		
ATM Pressure:		1010 mbar		
Note 1: When the input voltage is reduced or increased by 10%, the regulator voltage changes of less than 1%.Sothefollowing test items are conducted in the normal voltage.				

BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1:



2.6 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Test item description	Trademark(s)	Model/Type reference	Note
E-1	LED Display	N/A	X181P-83PR B	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. For detachable type I/O cable should be specified the length in cm in 『Length』 column.
3. "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

2.7 MEASUREMENT INSTRUMENTS LIST

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2027/5/13
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2027/5/13
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2027/5/13
4	Communication test set	R&S	CMW500	108058	V3.5.80	2027/5/13
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2027/5/13
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2027/5/13
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2027/5/13
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2027/5/13
9	2.4 GHz Filter	Shenxiang	MSF2400- 2483.5MS- 1154	20181015001	/	2027/5/15
10	5 GHz Filter	Shenxiang	MSF5150- 5850MS- 1155	20181015001	/	2027/5/15
11	Filter	Xingbo	XBLBQ- DZA120	190821-1-1	/	2027/5/16
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Temperature humidity chamber	Huihao	HT-HW- 1000L	/	/	2026/7/12
14	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
15	966 chamber	C.R.T.	966	/	/	2027/6/21
16	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2027/5/14
17	Amplifier	HP	8447E	2945A02747	/	2027/5/14

18	Amplifier	Agilent	8449B	3008A01838	/	2027/5/13
19	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2027/5/16
20	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2027/5/14
21	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
22	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2027/5/14
23	DC power supply	Agilent	E3640A	MY53050046	/	2027/5/14

Remark: Calibration institution "GRG METROLOGY & TEST GROUP Co., LTD."

Remark: Calibration based on Article 24-2, paragraph 4 of the Radio Act method c.


3. RF SHIELDING METHOD

We apply the product for Japan RF certification. The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily.

Confirmation method

☐ Sealed with special screws.
☐ Plastic chassis is being welded using ultrasonic waves.
☐ Chassis is glued using a special adhesive.
☐ Metal covers are spot-fused.
☐ Cover is specially interlocked.
☒ RF and Modulation components are covered with shielding case and this shielding case is soldered.
☐ Shield case is welded ant RF and modulations parts, and ID-ROM is welded using BGA Method.
☐ Shield case is welded ant RF and modulations parts, and ID-ROM is glued at its lead with a special adhesive.
☐ Shield case is welded ant RF and modulations parts, and ID-ROM is glued with a non-transparent laminating agent.
☐ Other: We apply the product for Japan RF certification. All RF and modulation section packet in one IC, and IC is welded using BGA Method, and RF module is welded on the main board, end-User can't open it easily.

The red circle is welding point.

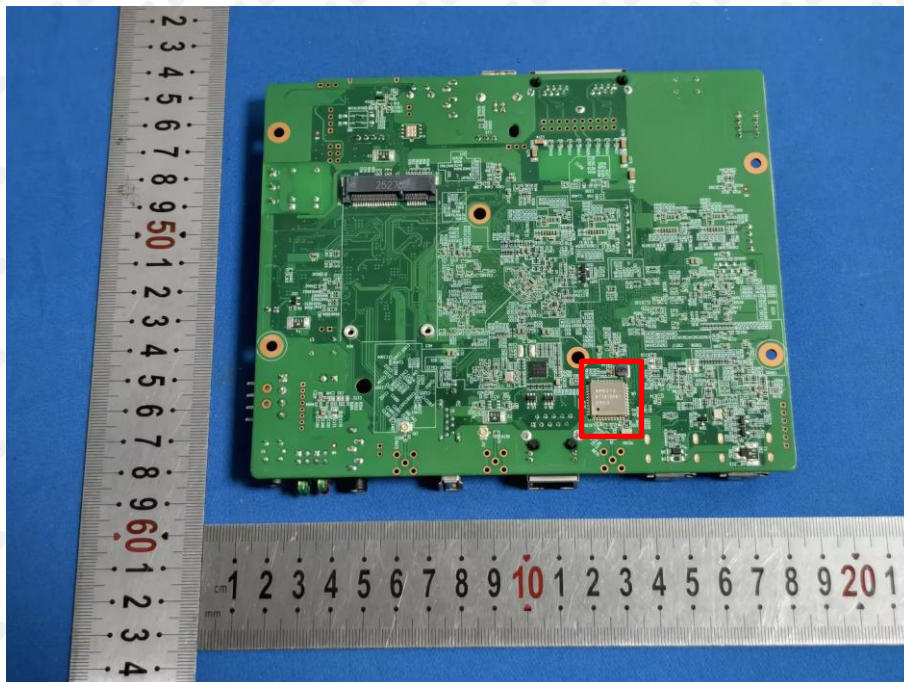

4 FREQUENCY ERROR

4.1 LIMIT

Item	Limits
Frequency Error	+/-50ppm

4.2 MEASURING INSTRUMENTS AND SETTING

The following table is the setting of Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	10KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3 TEST PROCEDURE

1. In the case of unmodulated signal (continuous or continuous burst), measure the frequency directly by a frequency meter.
2. In the case of burst waves, the measurement shall be done for enough time in order to obtain the enough measuring accuracy, and the average of the measured values becomes the final value.
3. In the case of a test mode with a specific frequency spectrum, measure the frequency of the specific spectrum by a spectrum analyzer connected a frequency meter.
4. In the cases above, if the frequency equivalent to the test frequency is not directly measured in principle, it shall be obtained by necessary calculation.

In the case of modulated signal, if there is no specific spectrum measurable by a spectrum analyzer but a specific dip is observed, it is allowed to measure the frequency with the signal generator (synthesized). That is, observe a signal of the signal generator concurrently (or alternately) with the tested signal using the spectrum analyzer while setting the frequency of the signal generator to the position of the dip on the screen of the spectrum analyzer, and determine the frequency of the signal generator at the time as a measured value.

4.4 TEST SETUP LAYOUT



4.5 EUT OPERATION DURING TEST

The EUT was placed on the test table and programmed in un-modulation function.

4.6 TEST RESULT

Temperature:	23°C	Relative Humidity:	54%
Test Mode:	TX Mode	Pressure:	101kPa




ANT 1

Test Voltage	Test Frequency (MHz)	Measured Frequency (MHz)	Frequency Error(ppm)	Limit (ppm)	P/F
Normal Voltage	2412	2411.983	-7.048	±50	PASS
	2442	2441.983	-6.962	±50	PASS
	2472	2471.983	-6.877	±50	PASS

ANT 2

Test Voltage	Test Frequency (MHz)	Measured Frequency (MHz)	Frequency Error(ppm)	Limit (ppm)	P/F
Normal Voltage	2412	2411.983	-7.048	±50	PASS
	2442	2441.983	-6.962	±50	PASS
	2472	2471.983	-6.877	±50	PASS

Mode	Channel	Test graph
Normal Voltage ANT 1	Low	Agilent Spectrum Analyzer - Swept SA Center Freq: 2.41200000 GHz Ref Offset: 6.99 dB Ref: 26.99 dBm Mkr1: 2.411983 GHz, 8.442 dBm Center: 2.4120000 GHz, #Res BW 10 kHz, #VBW 10 kHz, Span 1.000 MHz, Sweep 12.07 ms (1001 pts)
	Middle	Agilent Spectrum Analyzer - Swept SA Center Freq: 2.44200000 GHz Ref Offset: 7.02 dB Ref: 27.02 dBm Mkr1: 2.441983 GHz, 8.576 dBm Center: 2.4420000 GHz, #Res BW 10 kHz, #VBW 10 kHz, Span 1.000 MHz, Sweep 12.07 ms (1001 pts)
	High	Agilent Spectrum Analyzer - Swept SA Center Freq: 2.47200000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr1: 2.471983 GHz, 8.303 dBm Center: 2.4720000 GHz, #Res BW 10 kHz, #VBW 10 kHz, Span 1.000 MHz, Sweep 12.07 ms (1001 pts)

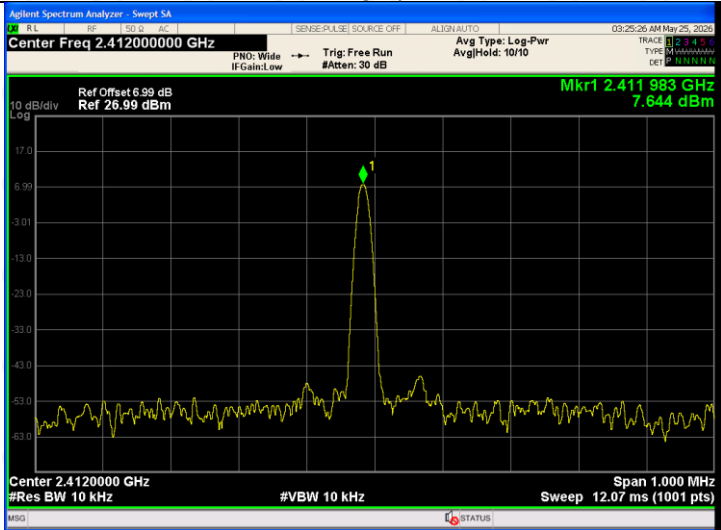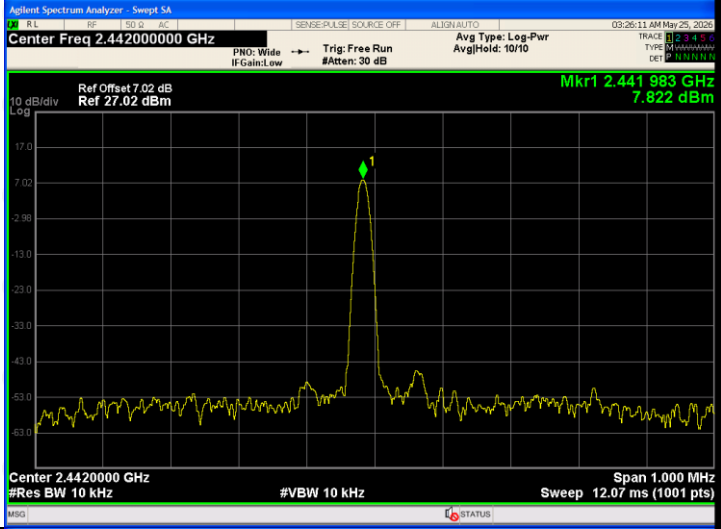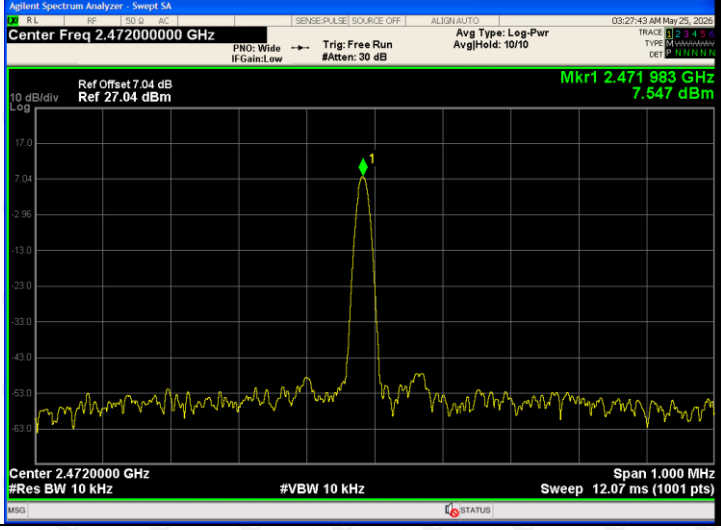Mode	Channel	Test graph
Normal Voltage ANT 2	Low	 Agilent Spectrum Analyzer - Swept SA Center Freq: 2.41200000 GHz Ref Offset: 6.99 dB Ref: 26.99 dBm Mkr1 2.411983 GHz 7.644 dBm Span 1.000 MHz #Res BW 10 kHz #VBW 10 kHz Sweep 12.07 ms (1001 pts)
	Middle	 Agilent Spectrum Analyzer - Swept SA Center Freq: 2.44200000 GHz Ref Offset: 7.02 dB Ref: 27.02 dBm Mkr1 2.441983 GHz 7.822 dBm Span 1.000 MHz #Res BW 10 kHz #VBW 10 kHz Sweep 12.07 ms (1001 pts)
	High	 Agilent Spectrum Analyzer - Swept SA Center Freq: 2.47200000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr1 2.471983 GHz 7.547 dBm Span 1.000 MHz #Res BW 10 kHz #VBW 10 kHz Sweep 12.07 ms (1001 pts)

5 ANTENNA POWER

5.1 LIMIT

Item	Limits
Antenna Power Density	802.11b,g,n(HT20):10mW/MHz 802.11n(HT40): 5mW/MHz
Antenna Power Error	+20% (Base on manufacturer declare antenna power density)

5.2 MEASURING INSTRUMENTS AND SETTING

The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 TEST PROCEDURE

Attenuation of the attenuator shall be set to provide an optimum input level to the spectrum analyzer.

1. Set the spectrum analyzer as follows for searching the frequency that outputs the maximum antenna power:

Center frequency: Test frequency

Frequency sweep width: Approximately twice of the occupied bandwidth

Resolution bandwidth: 1MHz

Video bandwidth: Approximately three times of the resolution bandwidth

Y-axis scale: 10dB/Div

Sweep time: Minimum time to ensure the measuring accuracy

(In the case of burst wave, one burst shall be included per data point.)

Trigger condition: Free run

Data points: 400 points or more

Sweep mode: Continuous sweep

Detection mode: Positive peak

Display mode: Maximum hold

2. When the trace is complete, find the peak value of the power envelope and record.

In the case of bandwidth above RBW, connect to power meter directly.

3. Calculate antenna power density by the formula below

$PT(mW/MHz) = \text{Total Output Power (mW)} / \text{Burst Ratio} / \text{Spread Bandwidth (MHz)}$ Burst Ratio = ON Time / OFF Time

4. Antenna Power Error is definition that actual measure antenna power tolerance between + 20% to - 80% power range that base on manufacturer declare the conducted power density.

5.4 TEST SETUP LAYOUT



EST DEVIATION

There is no deviation with the original standard.4

5.5 TEST RESULT

Temperature:	23°C	Relative Humidity:	54%
Test Mode:	TX Mode		101kPa

Test voltage (V)	Mode	Channel (MHz)	Antenna Power (mW/MHz) ANT1	Antenna Power (mW/MHz) ANT2	Total Antenna Power (mW/MHz)	Rated output power (mW/MHz)	Tolerance (%) ANT1	Tolerance (%) ANT2	Total Tolerance (%)	Limit
Normal	802.11b	2412	3.342	2.525	/	4	-16.45	-36.88	/	10mW/ MHz +20%
		2442	2.842	1.989	/	4	-28.95	-50.28	/	
		2472	2.314	2.193	/	4	-42.15	-45.18	/	
	802.11g	2412	3.686	2.641	/	4	-7.85	-33.98	/	
		2442	3.165	2.553	/	4	-20.88	-36.18	/	
		2472	2.743	2.259	/	4	-31.43	-43.53	/	
	802.11n (HT20)	2412	/	/	5.395	6	/	/	-0.10	5mW/ MHz +20%
		2442	/	/	4.48	6	/	/	-0.25	
		2472	/	/	4.082	6	/	/	-0.32	
	802.11n (HT40)	2422	/	/	4.269	5	/	/	-0.15	
		2442	/	/	3.678	5	/	/	-0.26	
		2462	/	/	3.696	5	/	/	-0.26	

6 OCCUPIED BANDWIDTH and Spread Factor

6.1 LIMIT

Item	Limits
Occupied Band Width	OFDM (802.11n40): 40MHz Others : 26MHz or less

6.2 MEASURING INSTRUMENTS AND SETTING


The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 TEST PROCEDURE

- Setting of SA is following as: RB: 300kHz / VB: 300kHz / SPAN: 40MHz / AT: 30dB Ref: 20dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
- EUT have transmitted the maximum modulation signal and fixed channelize (For DSSS or OFDM Device) or continuous maximum power of hopping mode(For FHSS Device). SA set to 99% of occupied bandwidth to measure occupied bandwidth. The limit is less than 26MHz(For DSSS or OFDM Device) or 83.5MHz(For FHSS Device).
- SA set to 90% of occupied bandwidth to measure Spread Spectrum Bandwidth and must greater than 500kHz.
- Spread Spectrum Factor = Spread Spectrum Bandwidth / modulation rate of EUT.
The modulation rate: MR=1.375 for 802.11b,MR=1.5 for 802.11g/n20,MR=3 for 802.11n40.

6.4 TEST SETUP LAYOUT

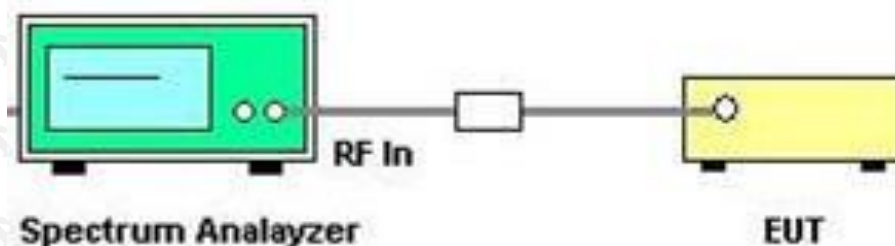

EST DEVIATION

There is no deviation with the original standard.

6.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Temperature:	23°C	Relative Humidity:	54%
Test Mode:	TX Mode	Pressure:	101kPa


ANT 1:

Mode	Test Voltage	Frequency (MHz)	Occupied Bandwidth 99%(MHz)	Spread Bandwidth 90%(MHz)
802.11b	Normal	2412	14.9716	9.8734
		2442	14.9671	9.8769
		2472	14.9875	9.8941
802.11g	Normal	2412	16.6326	14.7434
		2442	16.5966	14.7237
		2472	16.6362	14.7174
802.11n/HT 20	Normal	2412	17.6598	15.6951
		2442	17.6903	15.7223
		2472	17.7228	15.6828
802.11n/HT 40	Normal	2422	36.1502	32.4616
		2442	36.1845	32.1647
		2462	36.1773	32.4019

ANT 2:


Mode	Test Voltage	Frequency (MHz)	Occupied Bandwidth 99%(MHz)	Spread Bandwidth 90%(MHz)
802.11b	Normal	2412	14.9694	9.8684
		2442	14.9672	9.8706
		2472	14.9956	9.9079
802.11g	Normal	2412	16.6021	14.6794
		2442	16.6105	14.7660
		2472	16.6277	14.7812
802.11n/HT 20	Normal	2412	17.703	15.7358
		2442	17.7312	15.6811
		2472	17.7326	15.7541
802.11n/HT 40	Normal	2422	36.1797	31.9915
		2442	36.1461	32.0916
		2462	36.1603	32.3100

ANT1:

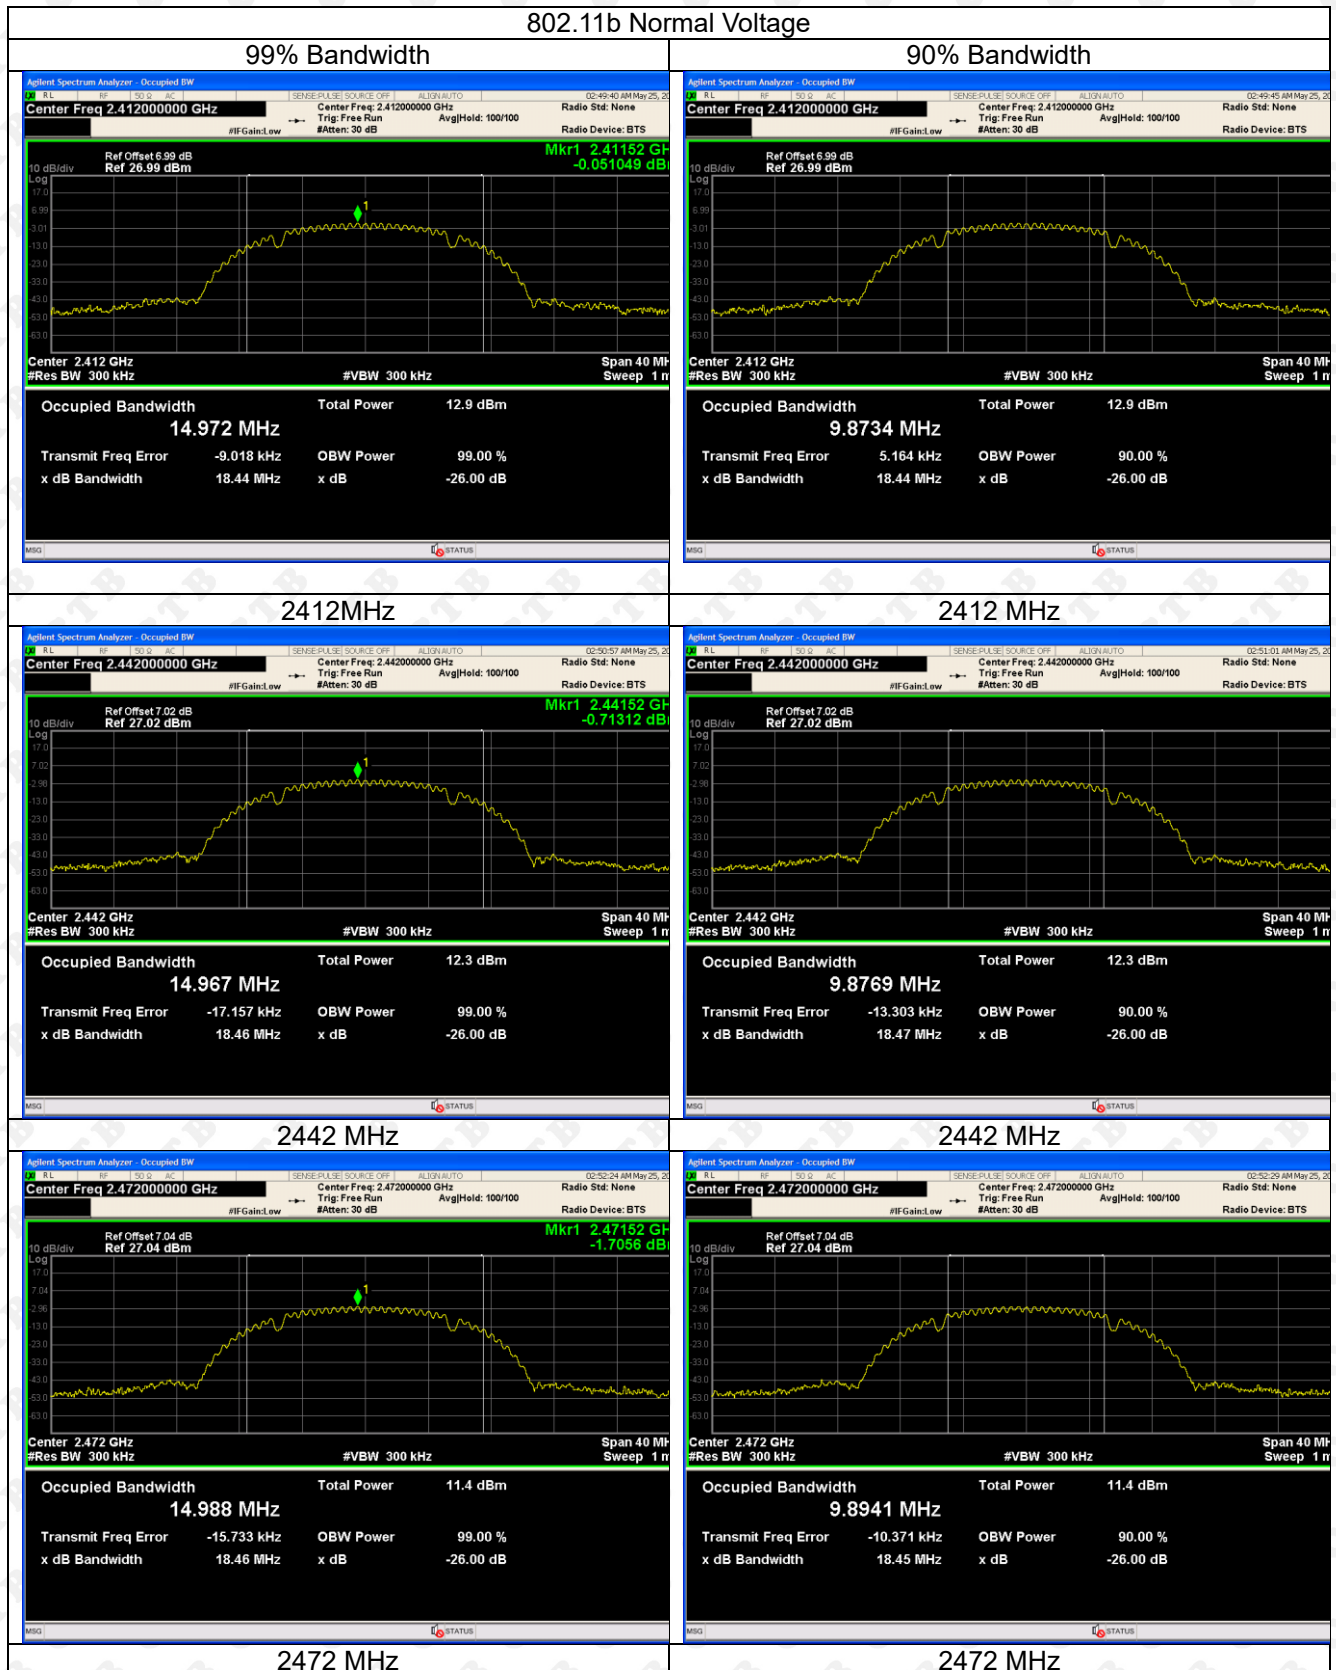


802.11g Normal Voltage


99% Bandwidth

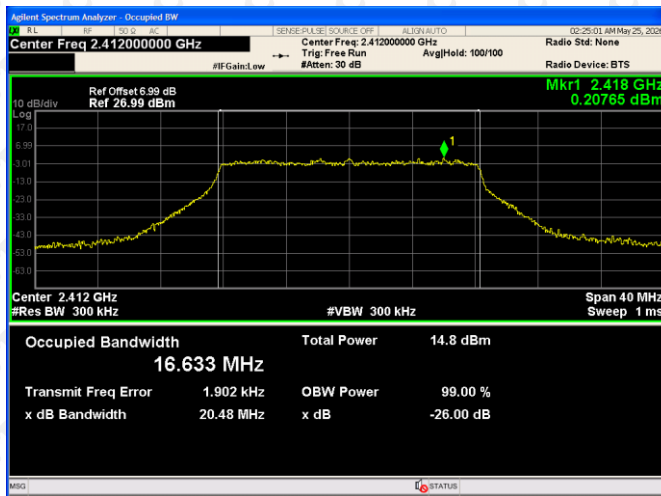


90% Bandwidth

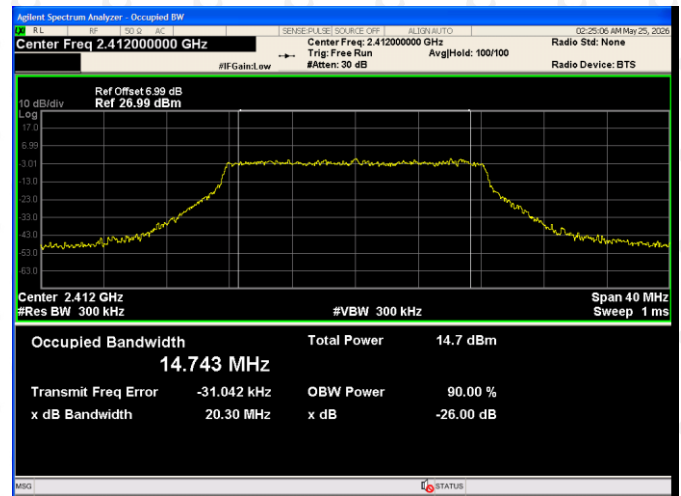


2412MHz

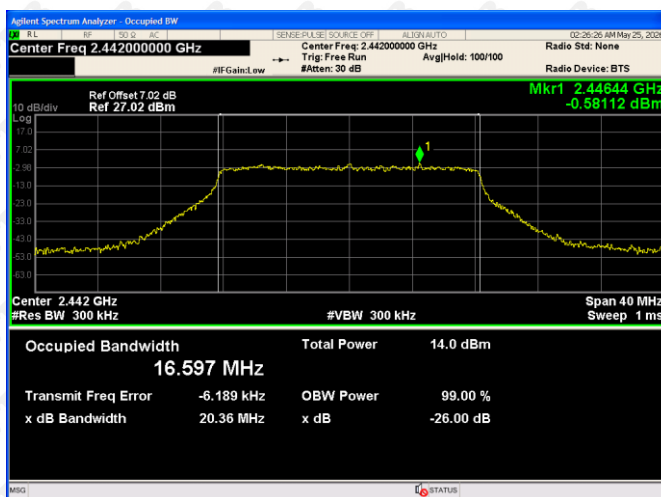


2412 MHz

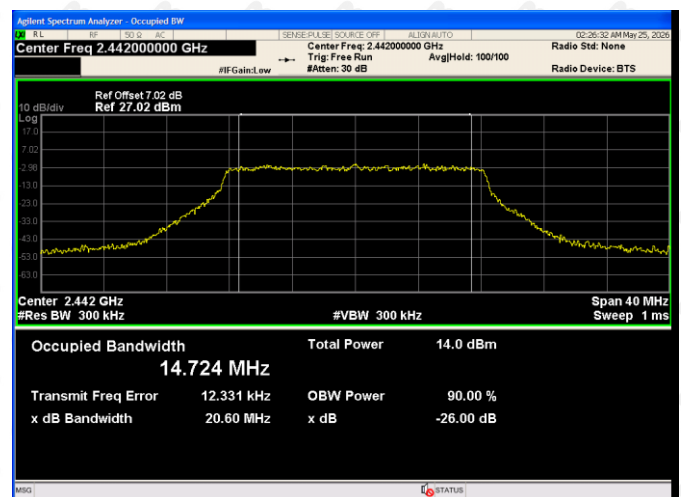

2442 MHz

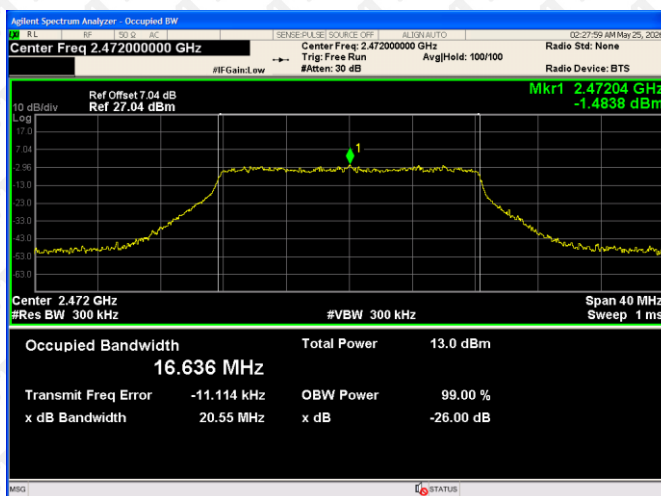

2442 MHz

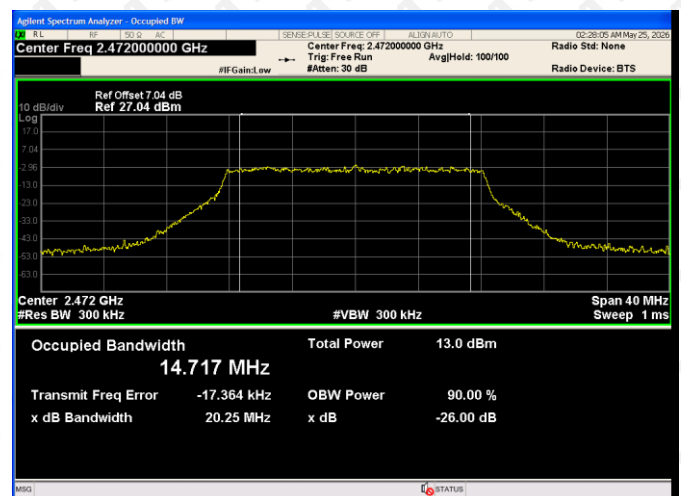


2472 MHz


2472 MHz

802.11n/HT20 Normal Voltage


99% Bandwidth

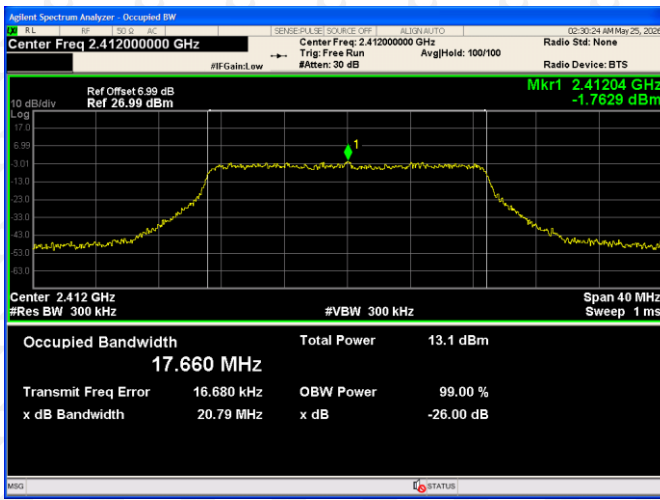


90% Bandwidth

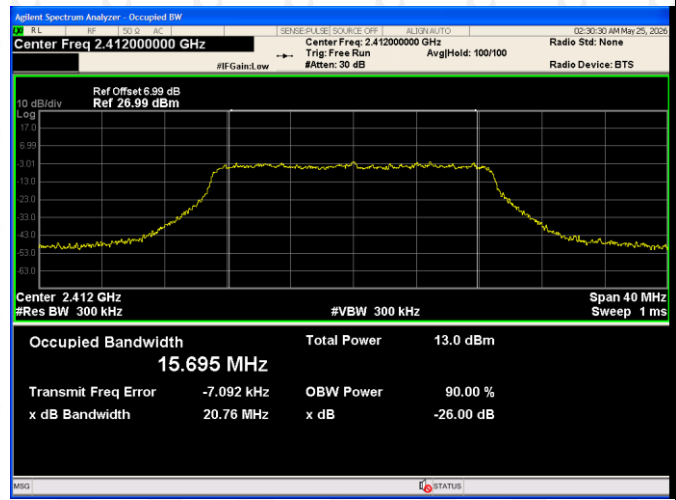


2412MHz

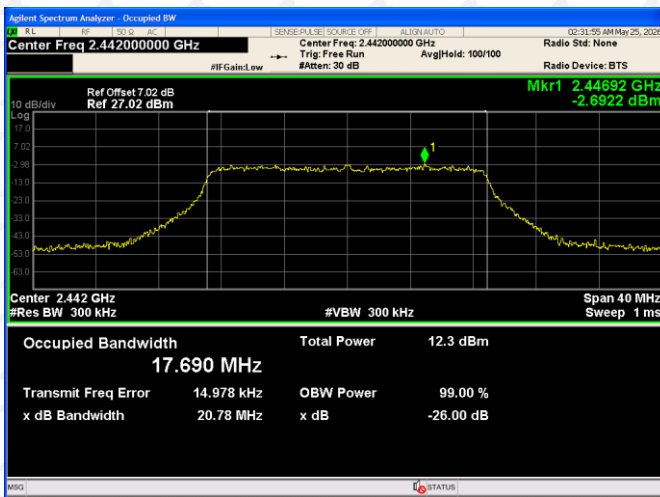


2412 MHz

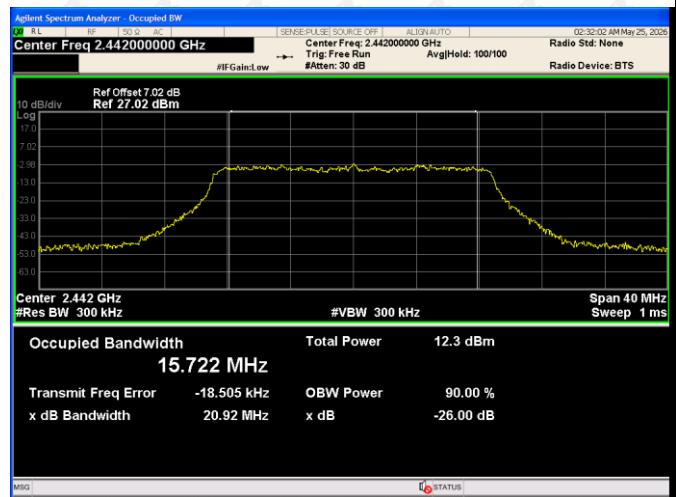

2442 MHz

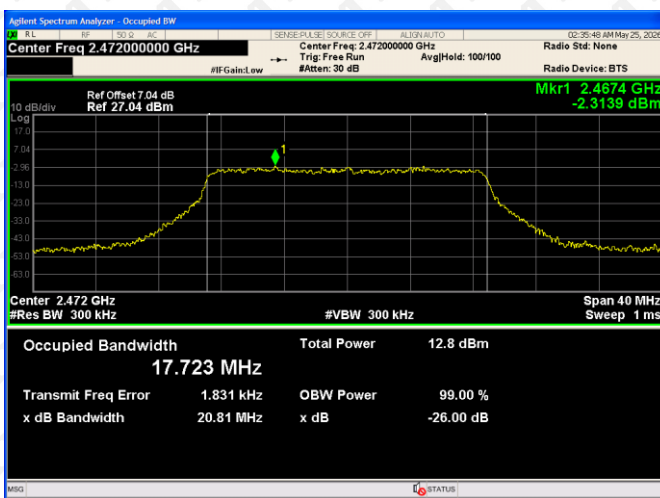

2442 MHz

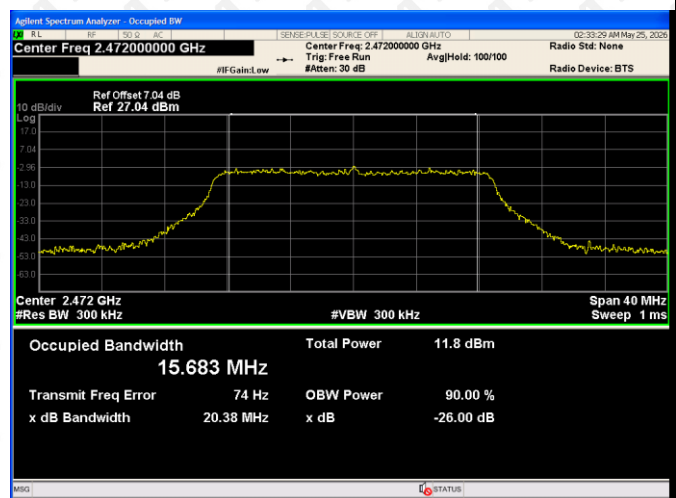


2472 MHz


2472 MHz

802.11n/HT40 Normal Voltage


99% Bandwidth

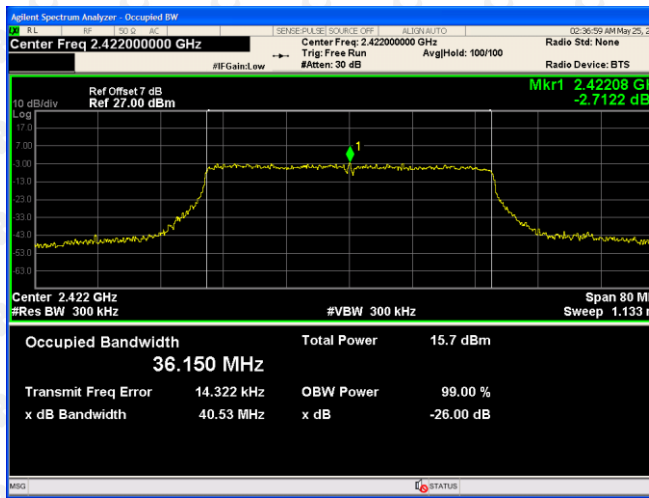


90% Bandwidth

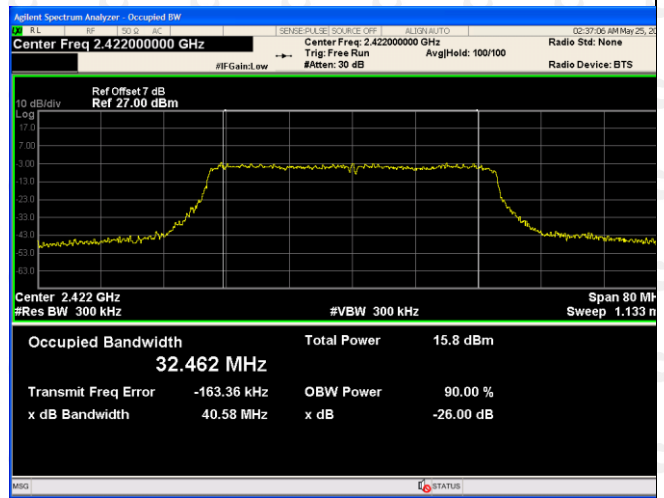


2422MHz

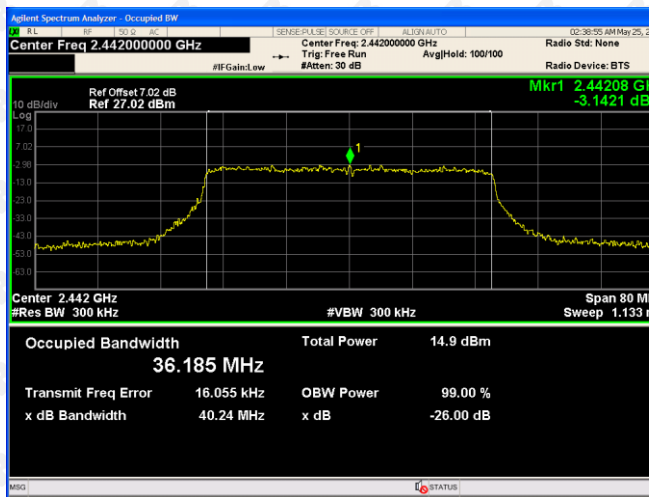


2412 MHz

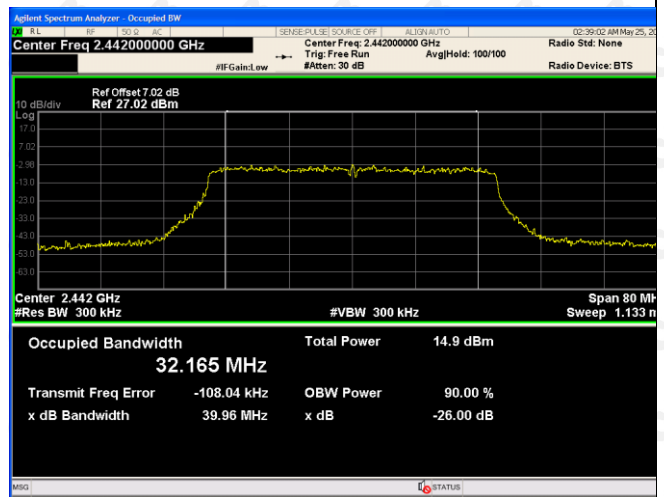

2442 MHz

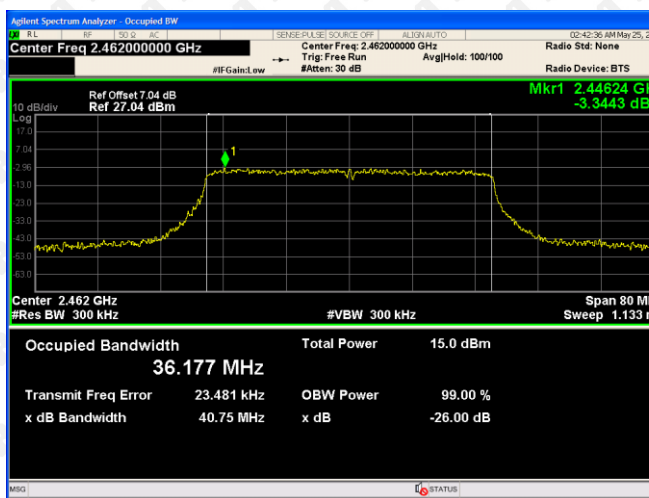


2442 MHz

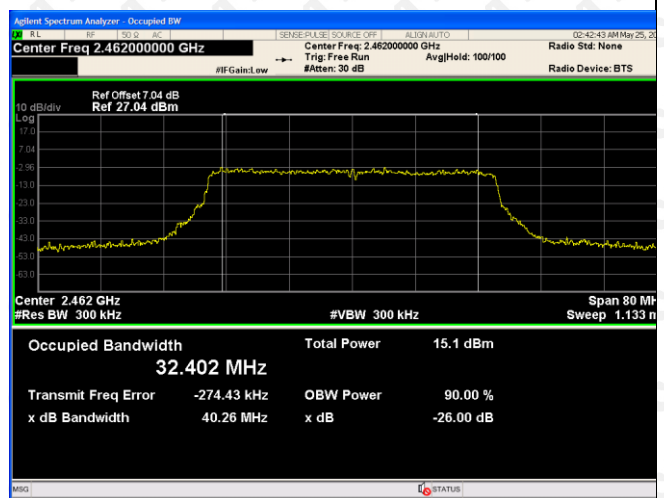

2462 MHz


2462 MHz

ANT2:

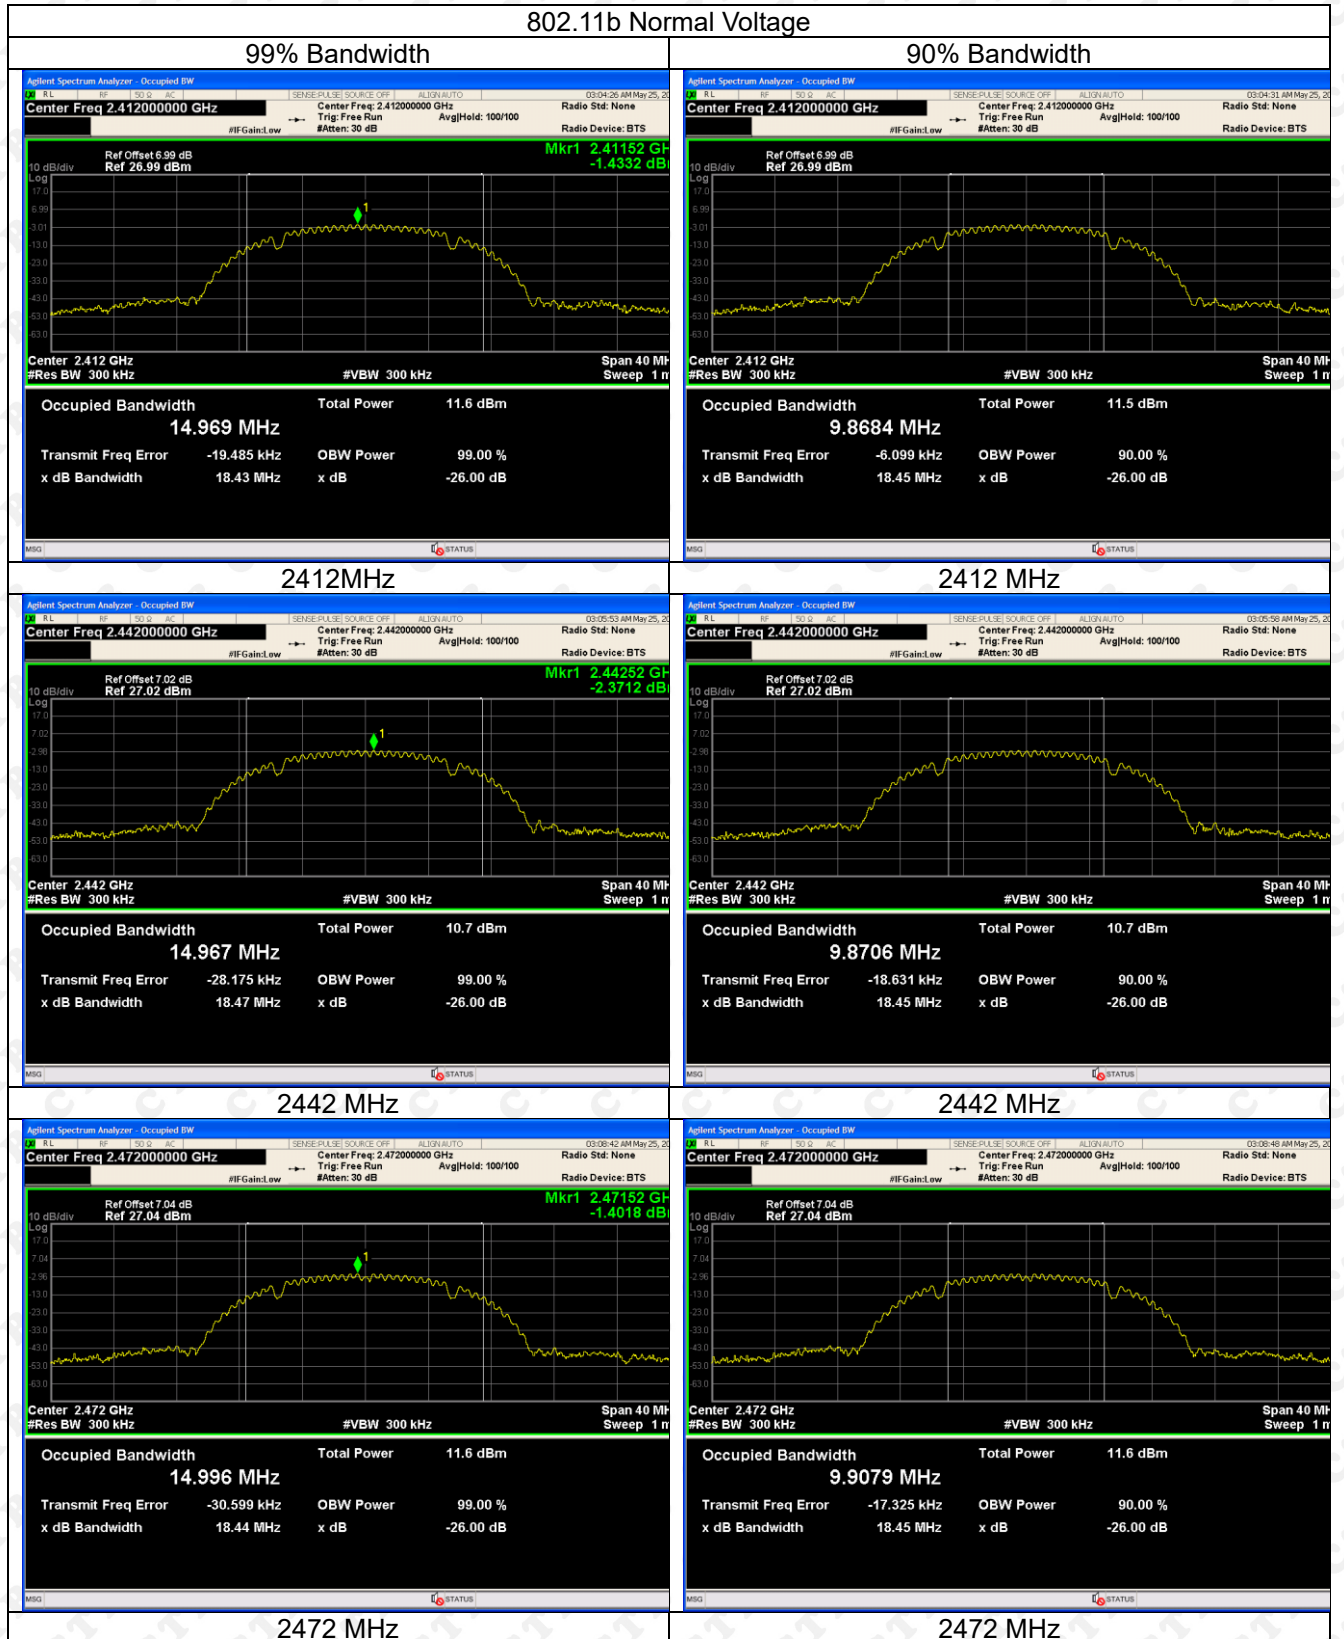


802.11g Normal Voltage


99% Bandwidth

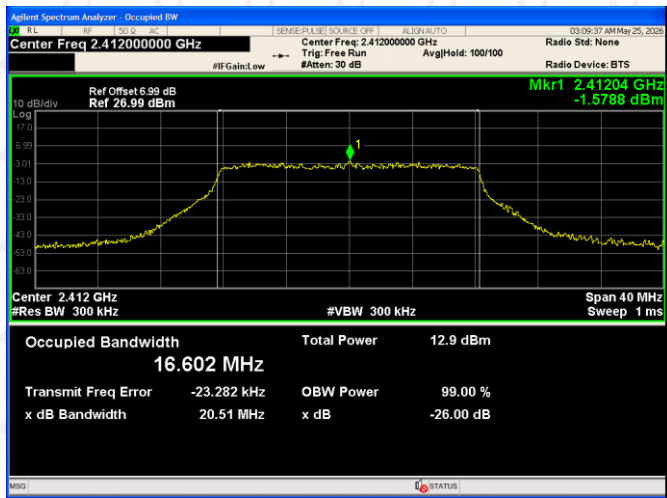


90% Bandwidth

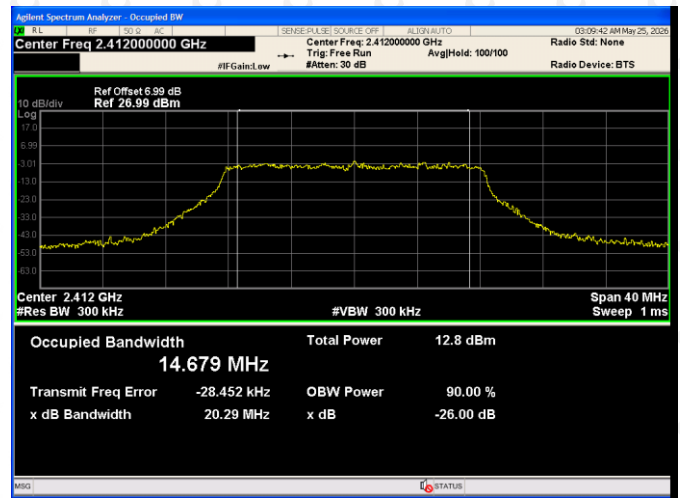


2412MHz

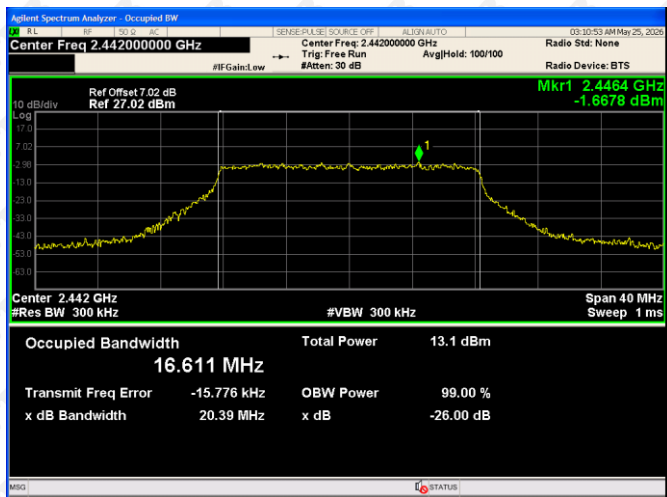


2412 MHz

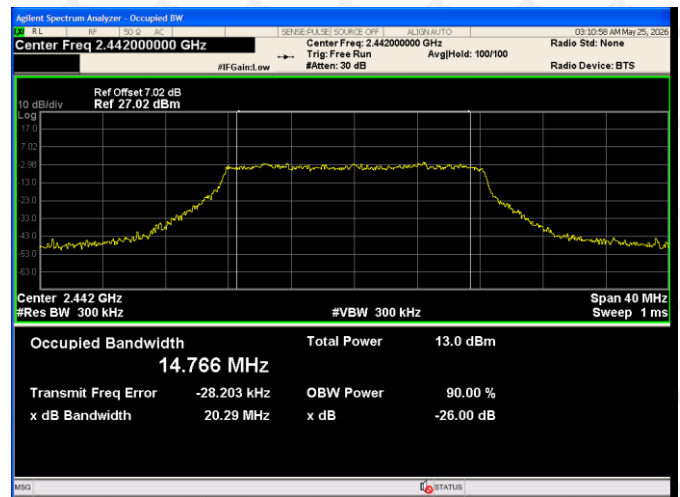

2442 MHz

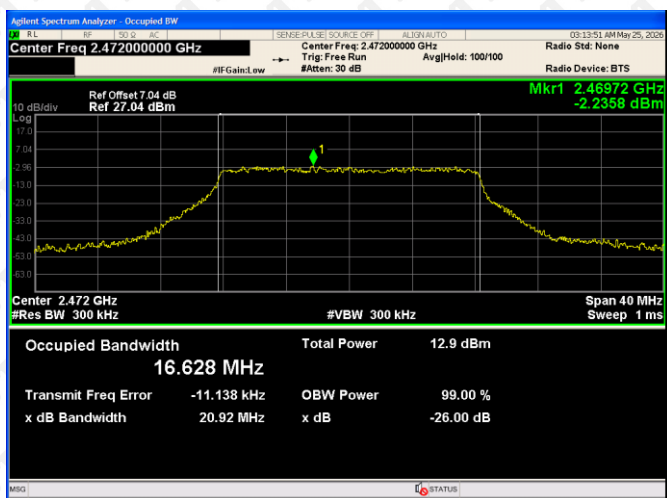

2442 MHz

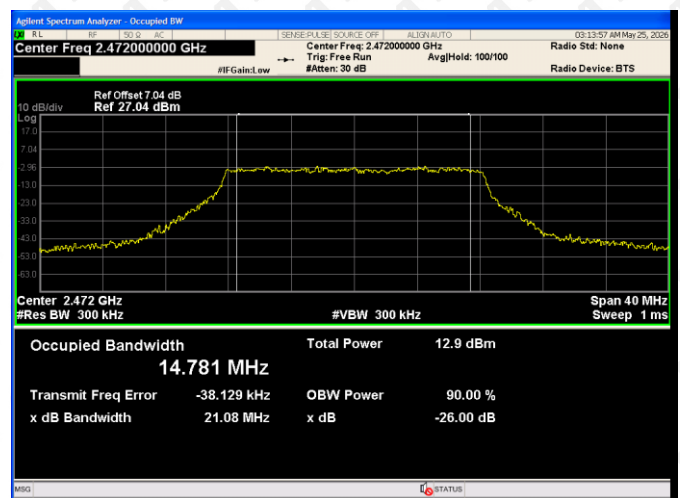


2472 MHz


2472 MHz

802.11n/HT20 Normal Voltage


99% Bandwidth

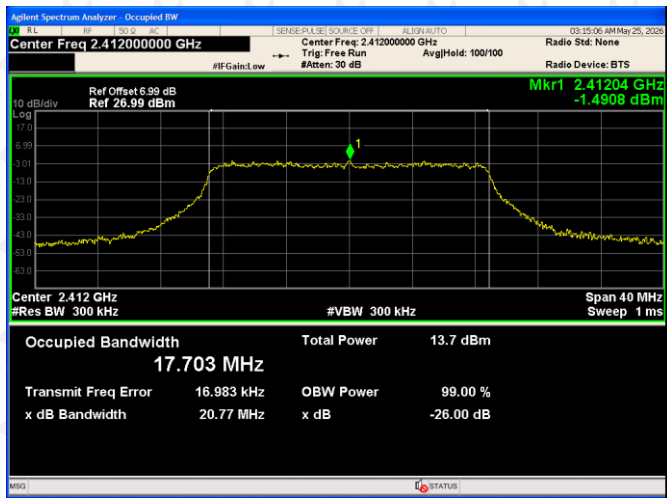


90% Bandwidth

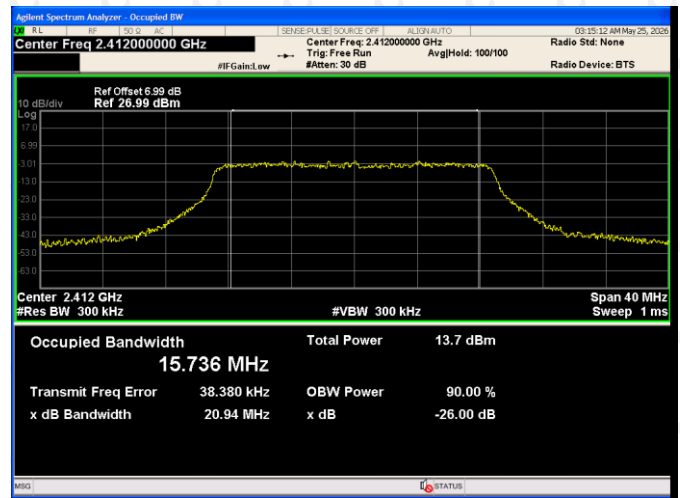


2412MHz

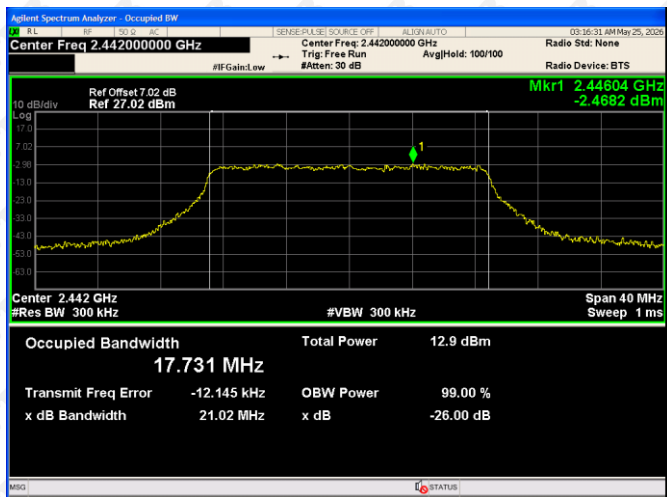


2412 MHz

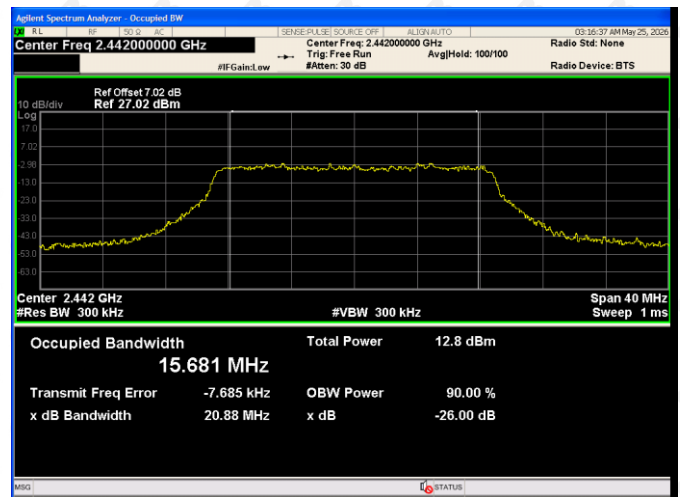

2442 MHz

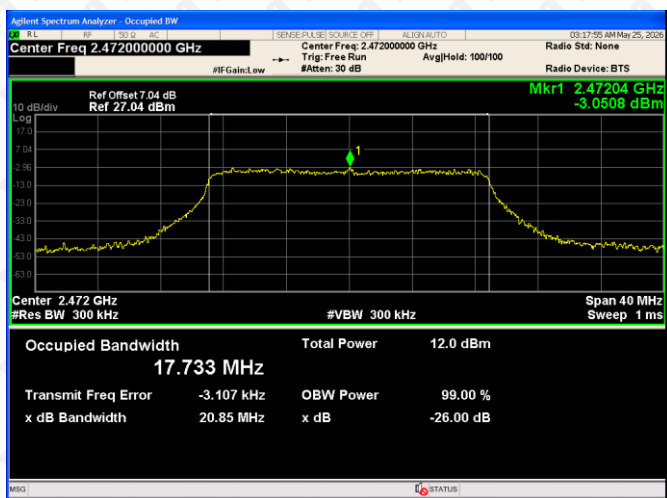

2442 MHz

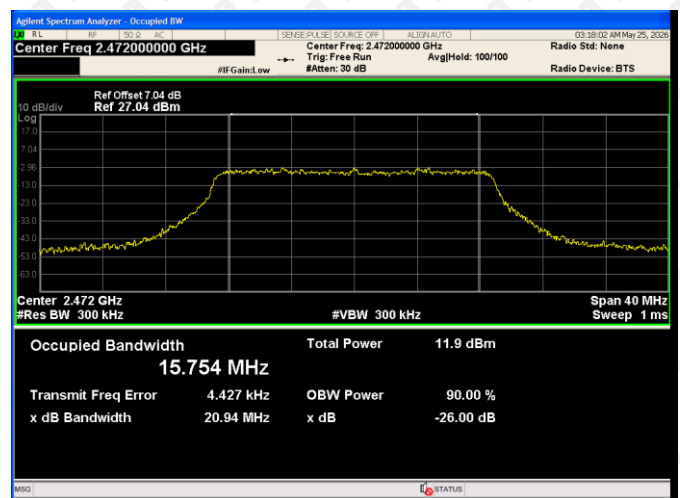


2472 MHz


2472 MHz

802.11n/HT40 Normal Voltage


99% Bandwidth

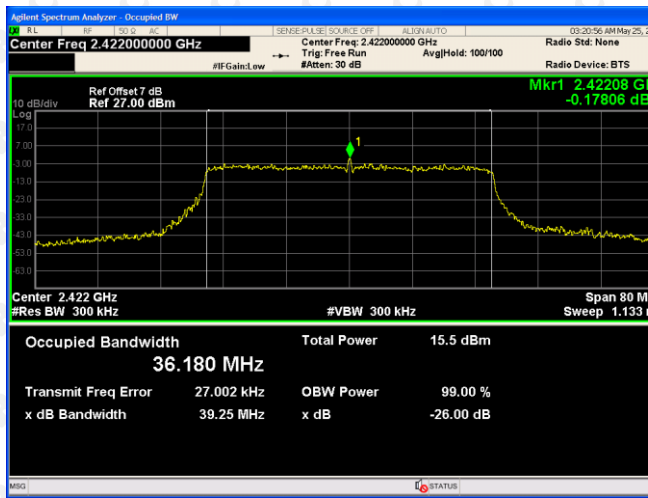


90% Bandwidth

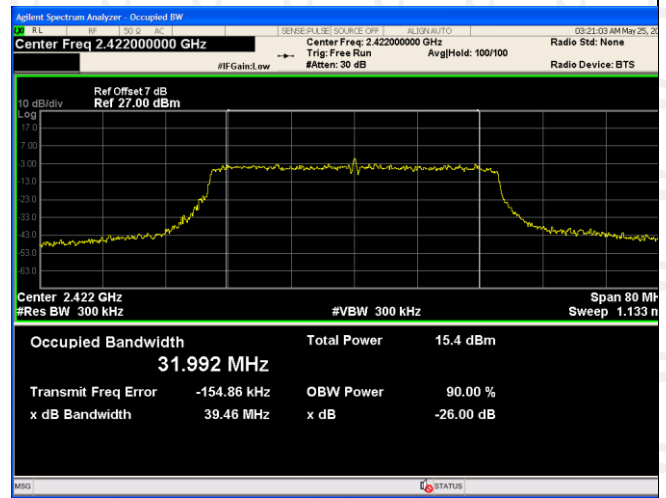


2422MHz

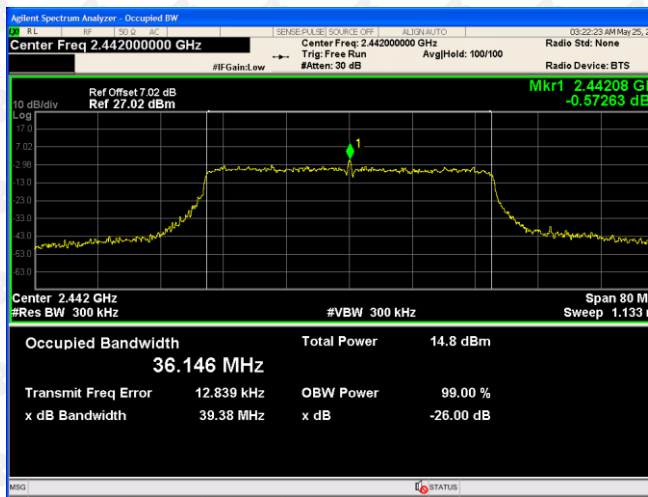


2412 MHz

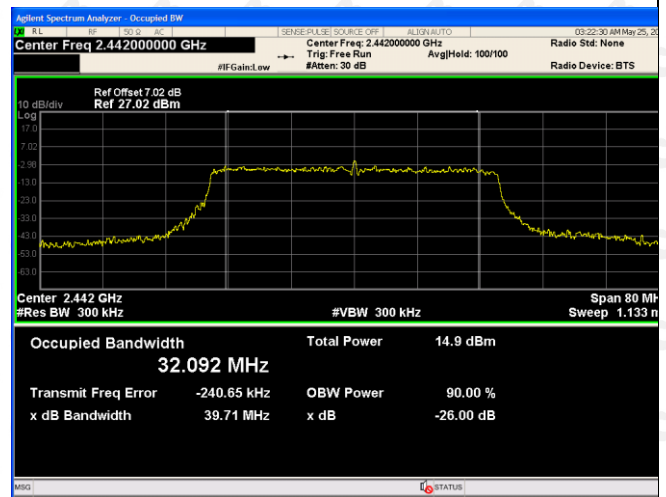

2442 MHz

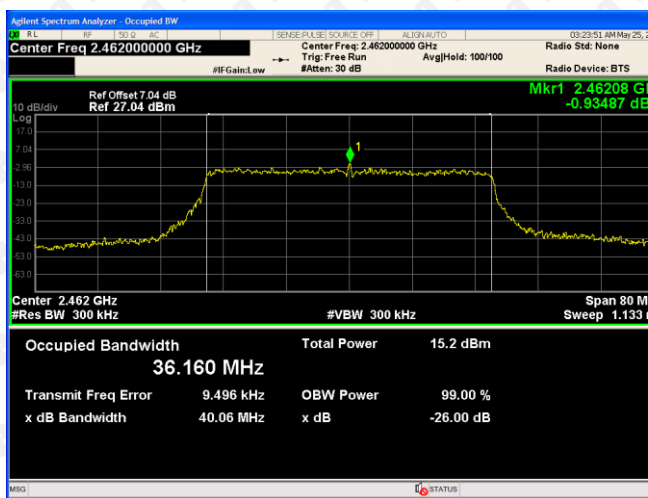

2442 MHz

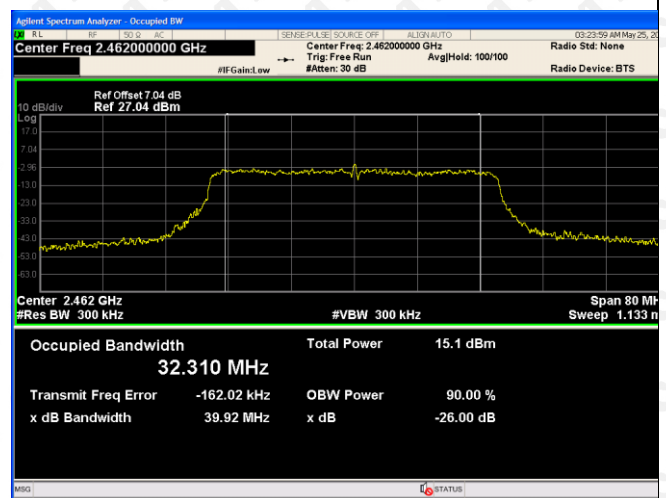

2462 MHz

2462 MHz

7 UNWANTED EMISSION INTENSITY MEASUREMENT

7.1 LIMIT

Item	Limits
TX Spurious Emission	$\leq 2.5 \mu\text{W/MHz} (30\text{MHz} \leq f \leq 1000\text{MHz})$
	$\leq 2.5 \mu\text{W/MHz} (1000\text{MHz} < f \leq 2387\text{MHz})$
	$\leq 25 \mu\text{W/MHz} (2387\text{MHz} < f \leq 2400\text{MHz})$
	$\leq 25 \mu\text{W/MHz} (2483.5\text{MHz} \leq f < 2496.5\text{MHz})$
	$\leq 2.5 \mu\text{W/MHz} (2496.5\text{MHz} \leq f < 12500\text{MHz})$

7.2 MEASURING INSTRUMENTS AND SETTING


The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 TEST PROCEDURE

1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: Below 1GHz RB: 100kHz / VB: 100kHz
Above 1GHz RB: 1MHz / VB: 1MHz / AT: 10dB Ref: 0dBm / Sweep time: Auto
Sweep Mode: Continuous sweep / Detect mode: Positive peak
Trace mode: Max hold
3. Setting of SA is following as 30MHz and stop frequency 1000MHz Then to mark peak reading value + cable loss shall be less than 2.5μW.
4. Setting of SA is following as 1000MHz and stop frequency 2387MHz Then to mark peak reading value + cable loss shall be less than 2.5μW.
5. SA adjusted to start frequency 2387MHz and stop frequency 2400MHz. Then to mark peak reading value + cable loss shall be less than 25μW.
6. SA adjusted to start frequency 2483.5MHz and stop frequency 2496.5MHz Then to mark peak reading value + cable loss shall be less than 25μW
7. SA adjusted to start frequency 2496.5MHz and stop frequency 12500MHz Then to mark peak reading value + cable loss shall be less than 2.5μW
8. Measure side band spurious as follows: For 2.4GHz band: 2374MHz~2400MHz and 2483.5MHz~2509.5MHz RBW = VBW = 30kHz, Result_Value = Measured_Value + 15.2 [dBm]
9. If the Result_Value is over the requirement, take total sum of 1MHz band centered at the spur frequency like ACLP measurement as Result_Value.

7.4 TEST SETUP LAYOUT

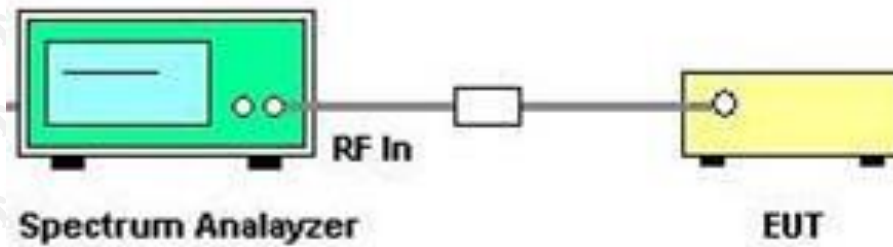

EST DEVIATION

There is no deviation with the original standard.

7.5 TEST RESULT

Temperature:	23°C	Relative Humidity:	54%
Test Voltage:	Normal Voltage	Pressure:	101kPa


ANT 1


Test mode	Test Channel	Test freq. range	Emission Frequency (MHz)	Test result (dBm/MHz)	Test result (uW/MHz)	limits (uW/MHz)	Result
802.11b	Low	30MHz≤f≤1000MHz	860.32	-43.36	0.461	2.5	PASS
		1000MHz < f≤2387MHz	2349.55	-41.92	0.064	2.5	PASS
		2387MHz < f≤2400MHz	2399.97	-36.97	0.201	25	PASS
		2483.5MHz≤f < 2496.5MHz	2494.67	-41.97	0.064	25	PASS
		2496.5MHz≤f < 12750MHz	5203.42	-38.08	0.156	2.5	PASS
	Middle	30MHz≤f≤1000MHz	211.39	-43.7	0.043	2.5	PASS
		1000MHz < f≤2387MHz	2380.07	-42.93	0.051	2.5	PASS
		2387MHz < f≤2400MHz	2395.94	-42.32	0.059	25	PASS
		2483.5MHz≤f < 2496.5MHz	2493.74	-42.62	0.055	25	PASS
		2496.5MHz≤f < 12750MHz	5203.42	-39.27	0.118	2.5	PASS
	High	30MHz≤f≤1000MHz	910.76	-43.43	0.045	2.5	PASS
		1000MHz < f≤2387MHz	2367.58	-42.92	0.051	2.5	PASS
		2387MHz < f≤2400MHz	2398.99	-42.04	0.063	25	PASS
		2483.5MHz≤f < 2496.5MHz	2483.51	-38.8	0.132	25	PASS
		2496.5MHz≤f < 12750MHz	5818.63	-38.09	0.155	2.5	PASS


ANT 2

Test mode	Test Channel	Test freq. range	Emission Frequency (MHz)	Test result (dBm/MHz)	Test result (uW/MHz)	limits (uW/MHz)	Result
802.11b	Low	30MHz≤f≤1000MHz	472.32	-43.87	0.410	2.5	PASS
		1000MHz < f≤2387MHz	2305.17	-42.24	0.060	2.5	PASS
		2387MHz < f≤2400MHz	2399.67	-37.7	0.170	25	PASS
		2483.5MHz≤f < 2496.5MHz	2486.61	-41.68	0.068	25	PASS
		2496.5MHz≤f < 12750MHz	5111.14	-35.11	0.308	2.5	PASS
	Middle	30MHz≤f≤1000MHz	797.27	-43.91	0.041	2.5	PASS
		1000MHz < f≤2387MHz	2238.59	-42.15	0.061	2.5	PASS
		2387MHz < f≤2400MHz	2396.72	-42.63	0.055	25	PASS
		2483.5MHz≤f < 2496.5MHz	2492.64	-42.47	0.057	25	PASS
		2496.5MHz≤f < 12750MHz	5182.92	-34.98	0.318	2.5	PASS
	High	30MHz≤f≤1000MHz	809.88	-43.27	0.047	2.5	PASS
		1000MHz < f≤2387MHz	2205.3	-42.41	0.057	2.5	PASS
		2387MHz < f≤2400MHz	2391.04	-42.31	0.059	25	PASS
		2483.5MHz≤f < 2496.5MHz	2483.5	-39.11	0.123	25	PASS
		2496.5MHz≤f < 12750MHz	4557.45	-39.09	0.123	2.5	PASS


ANT 1:

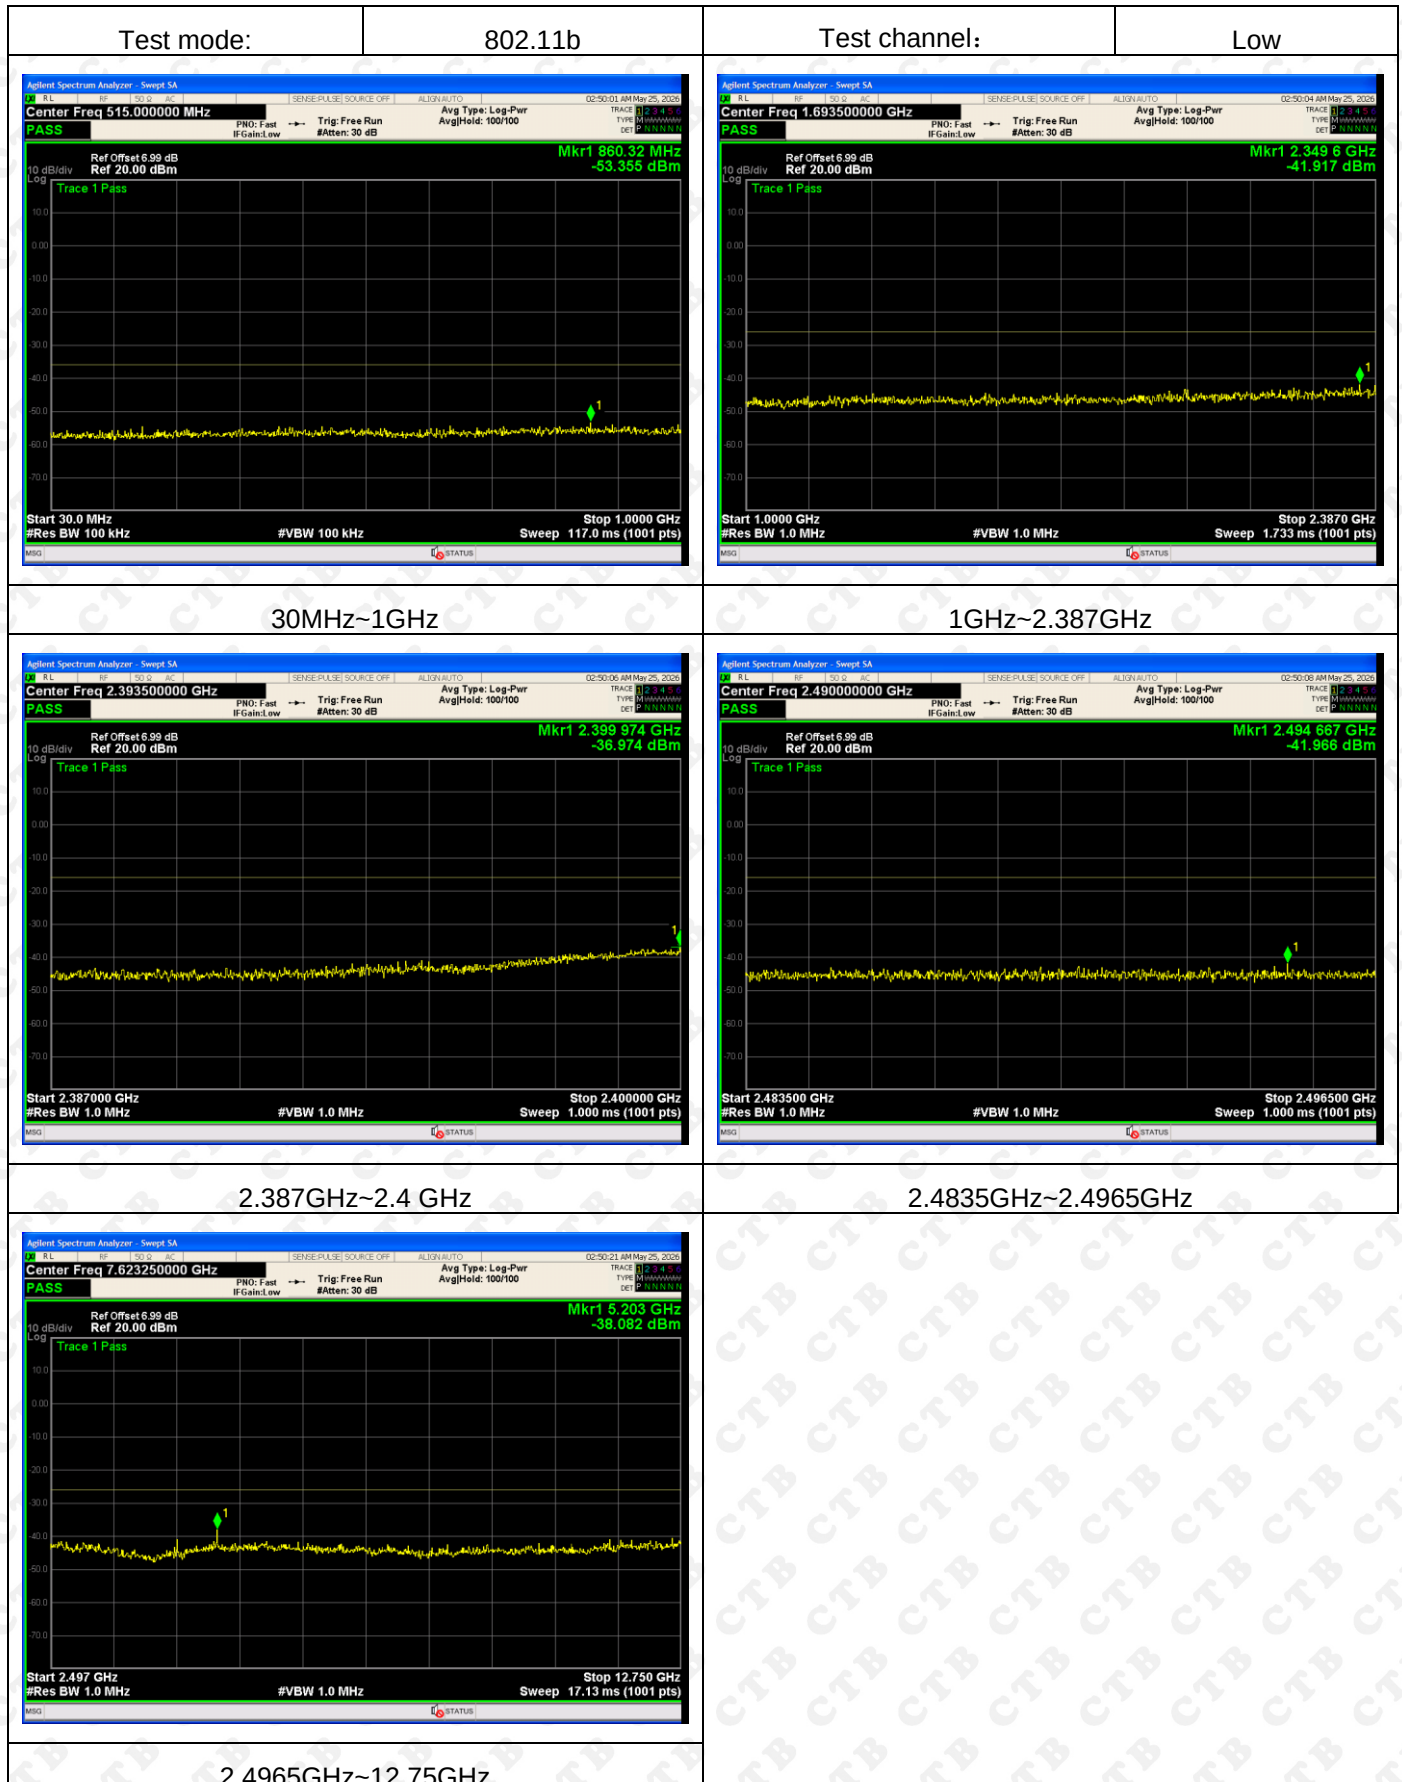


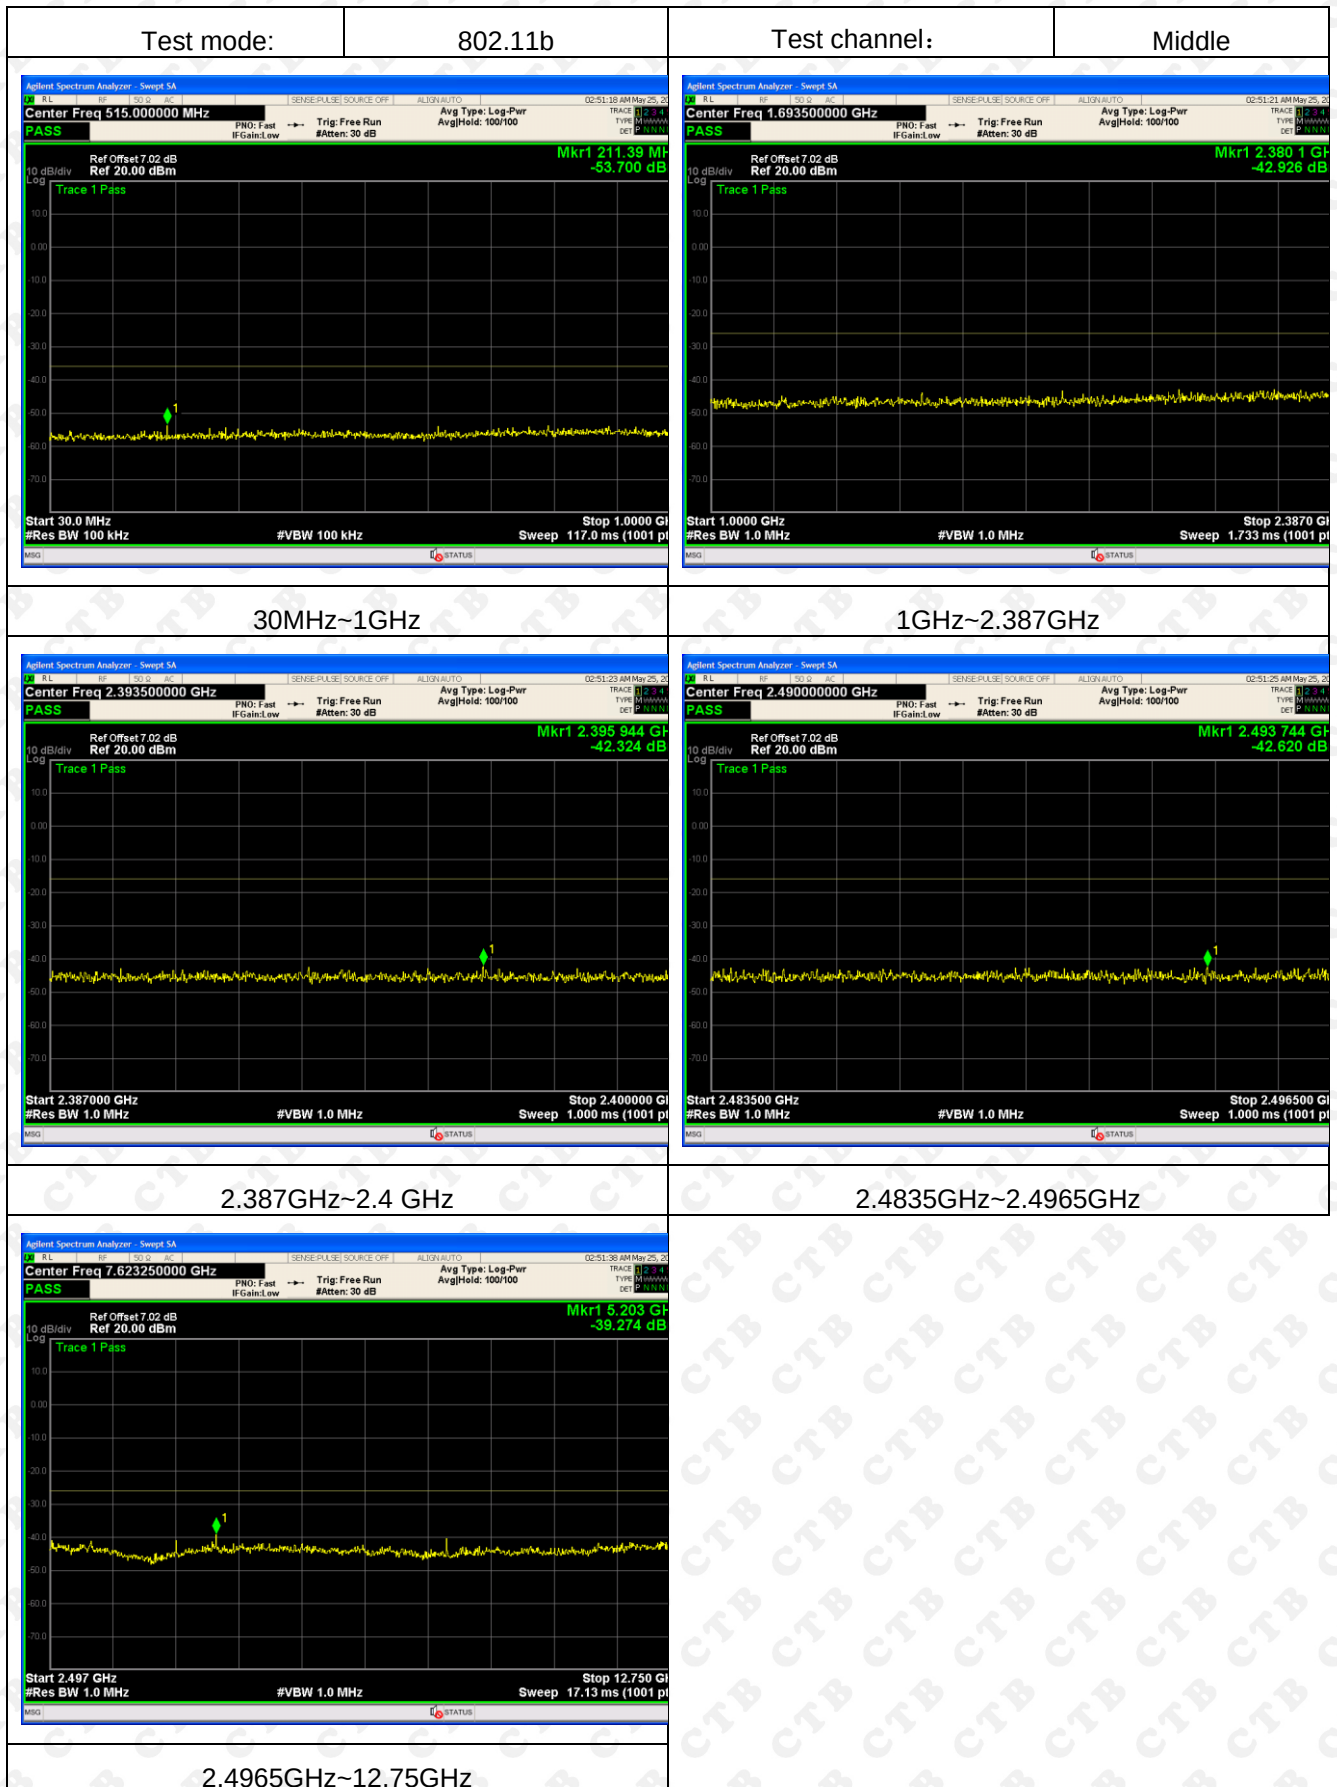


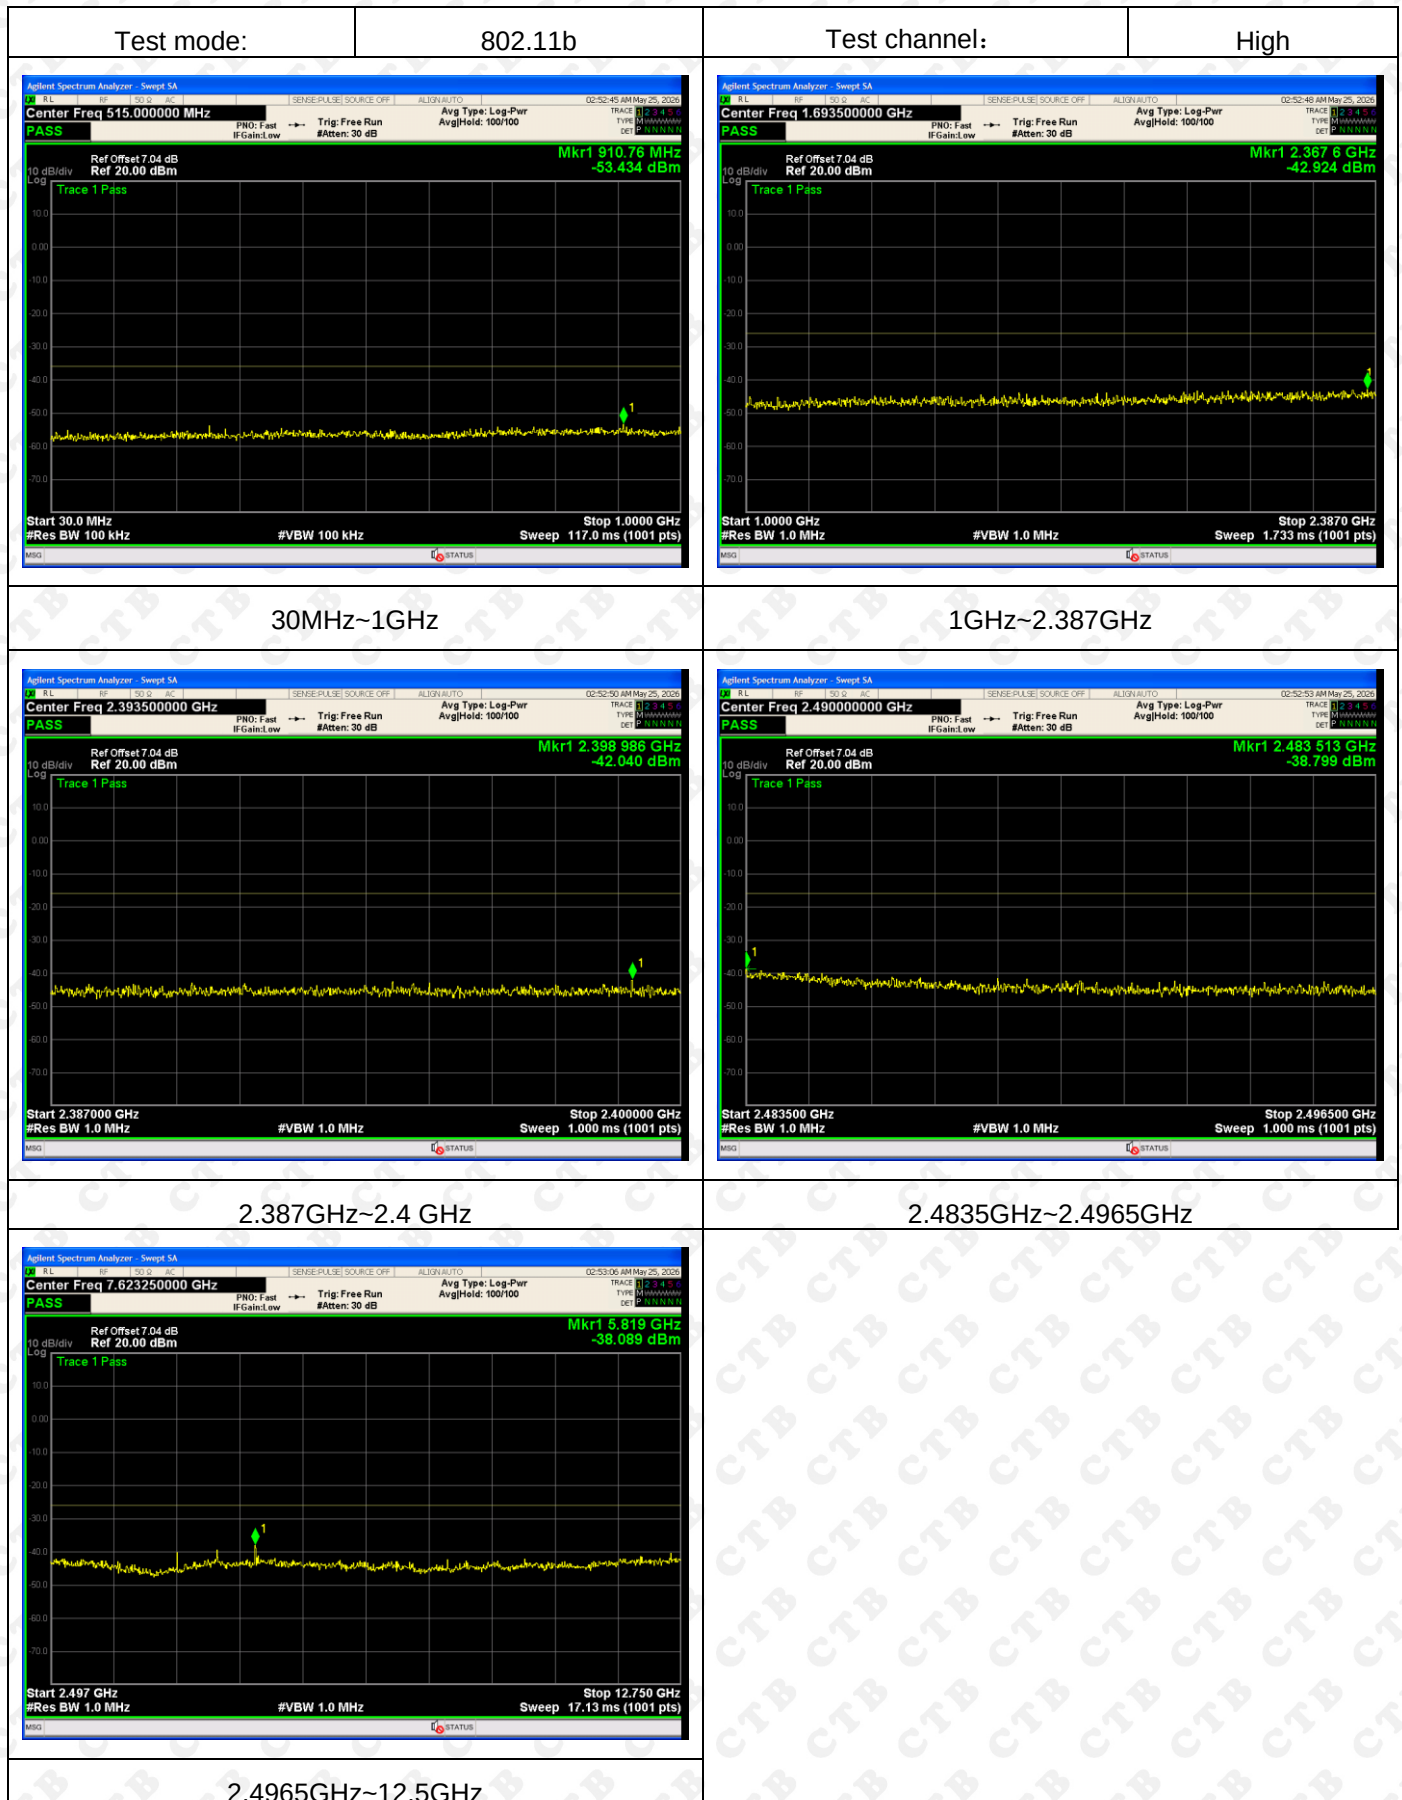

ANT 2:

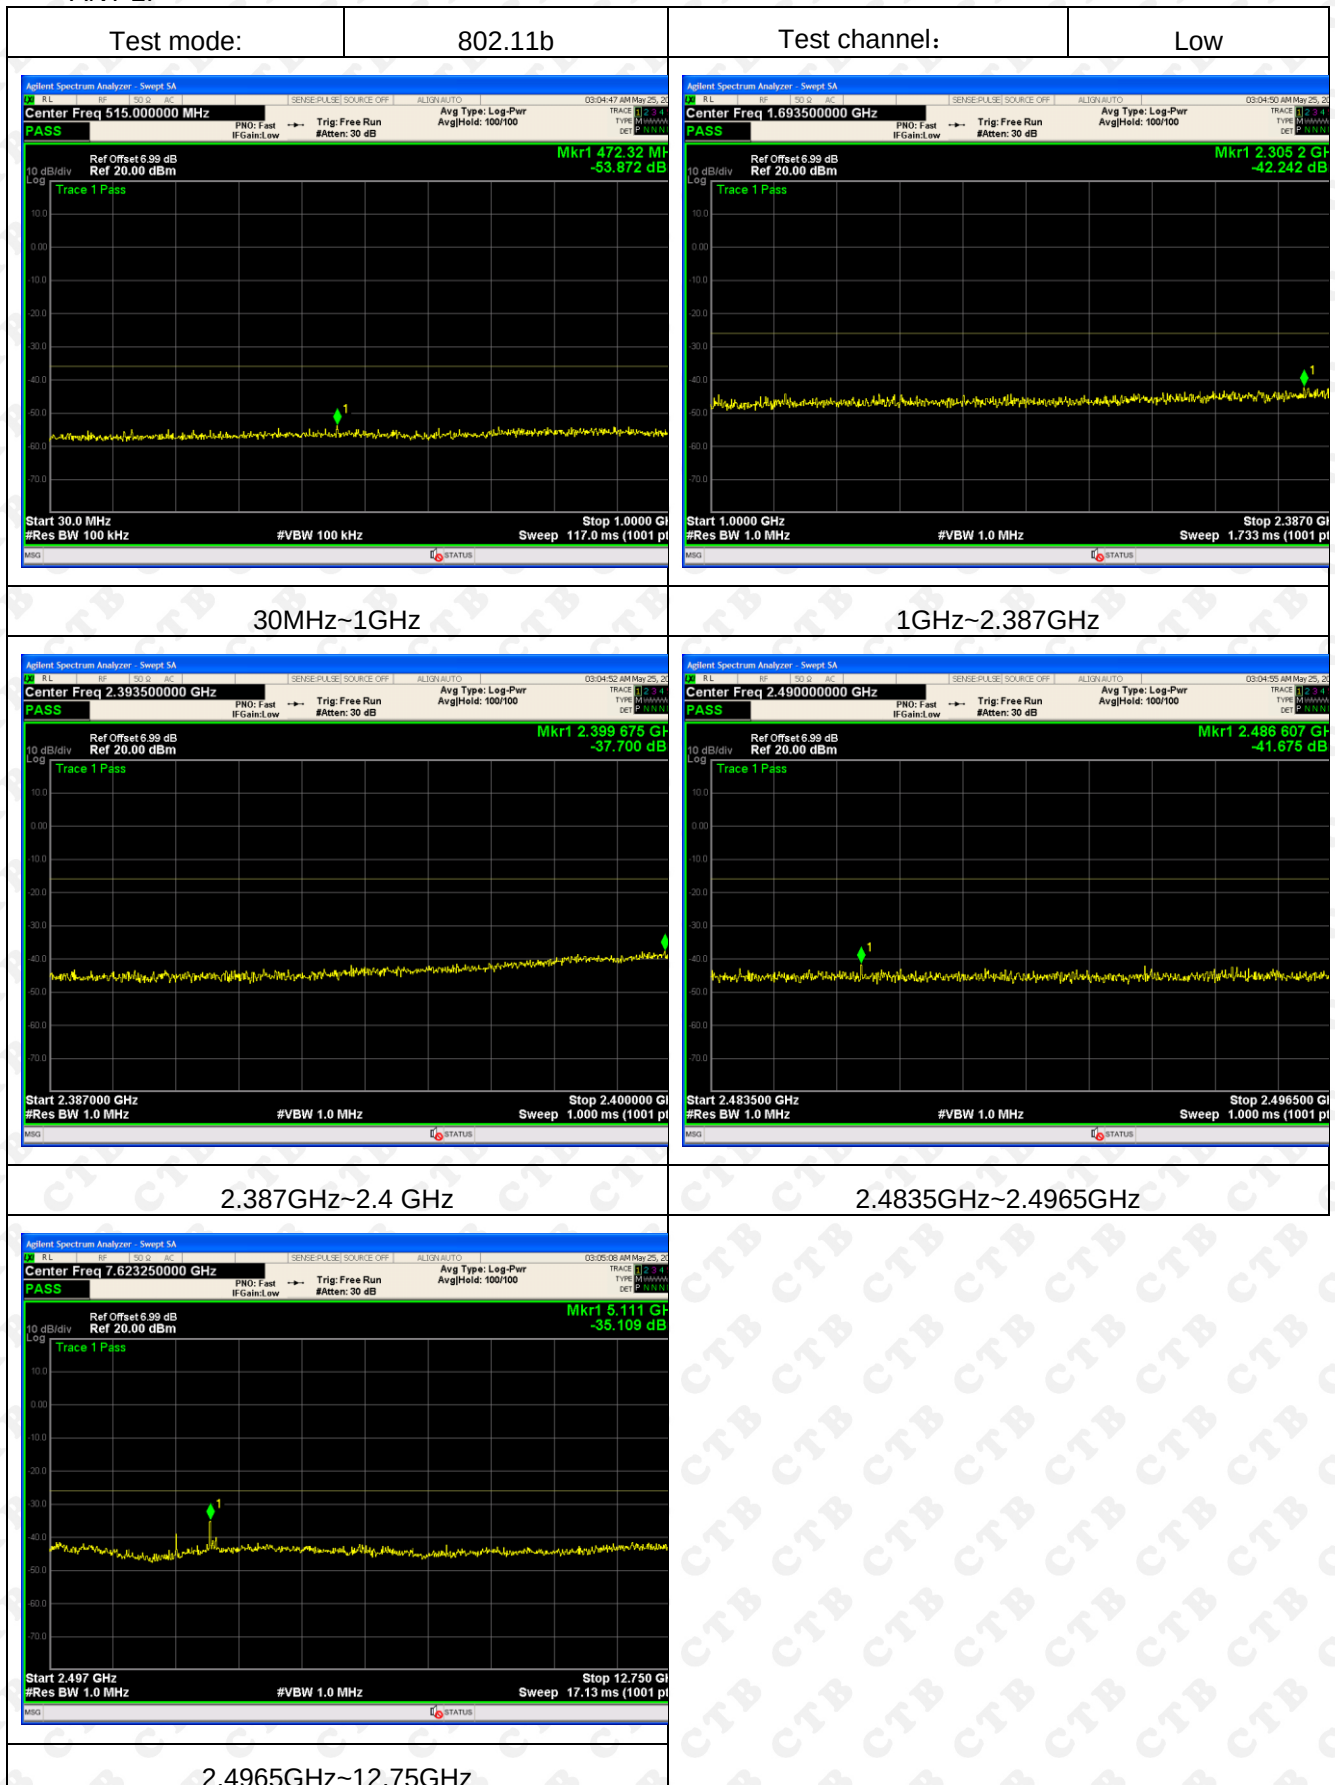

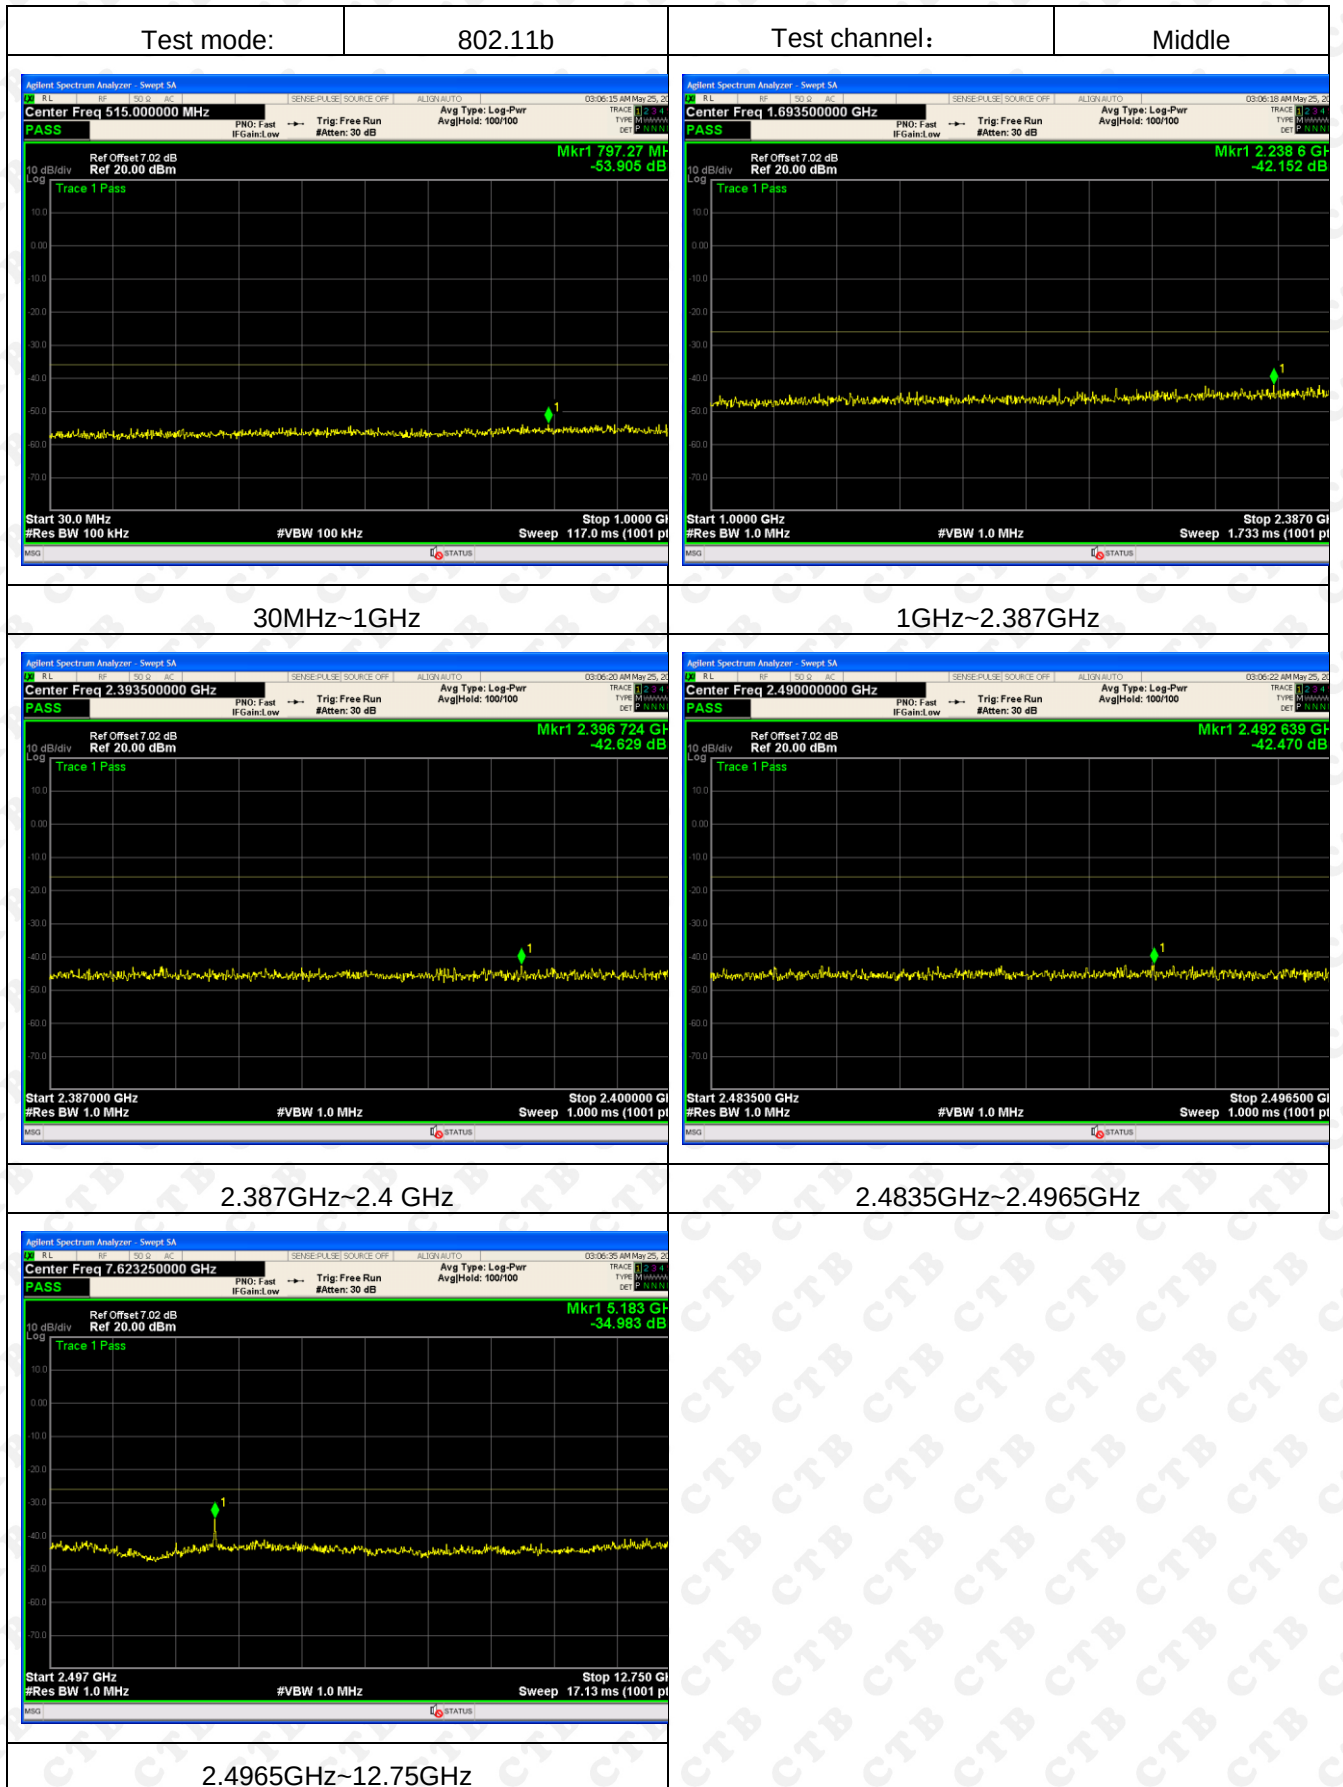

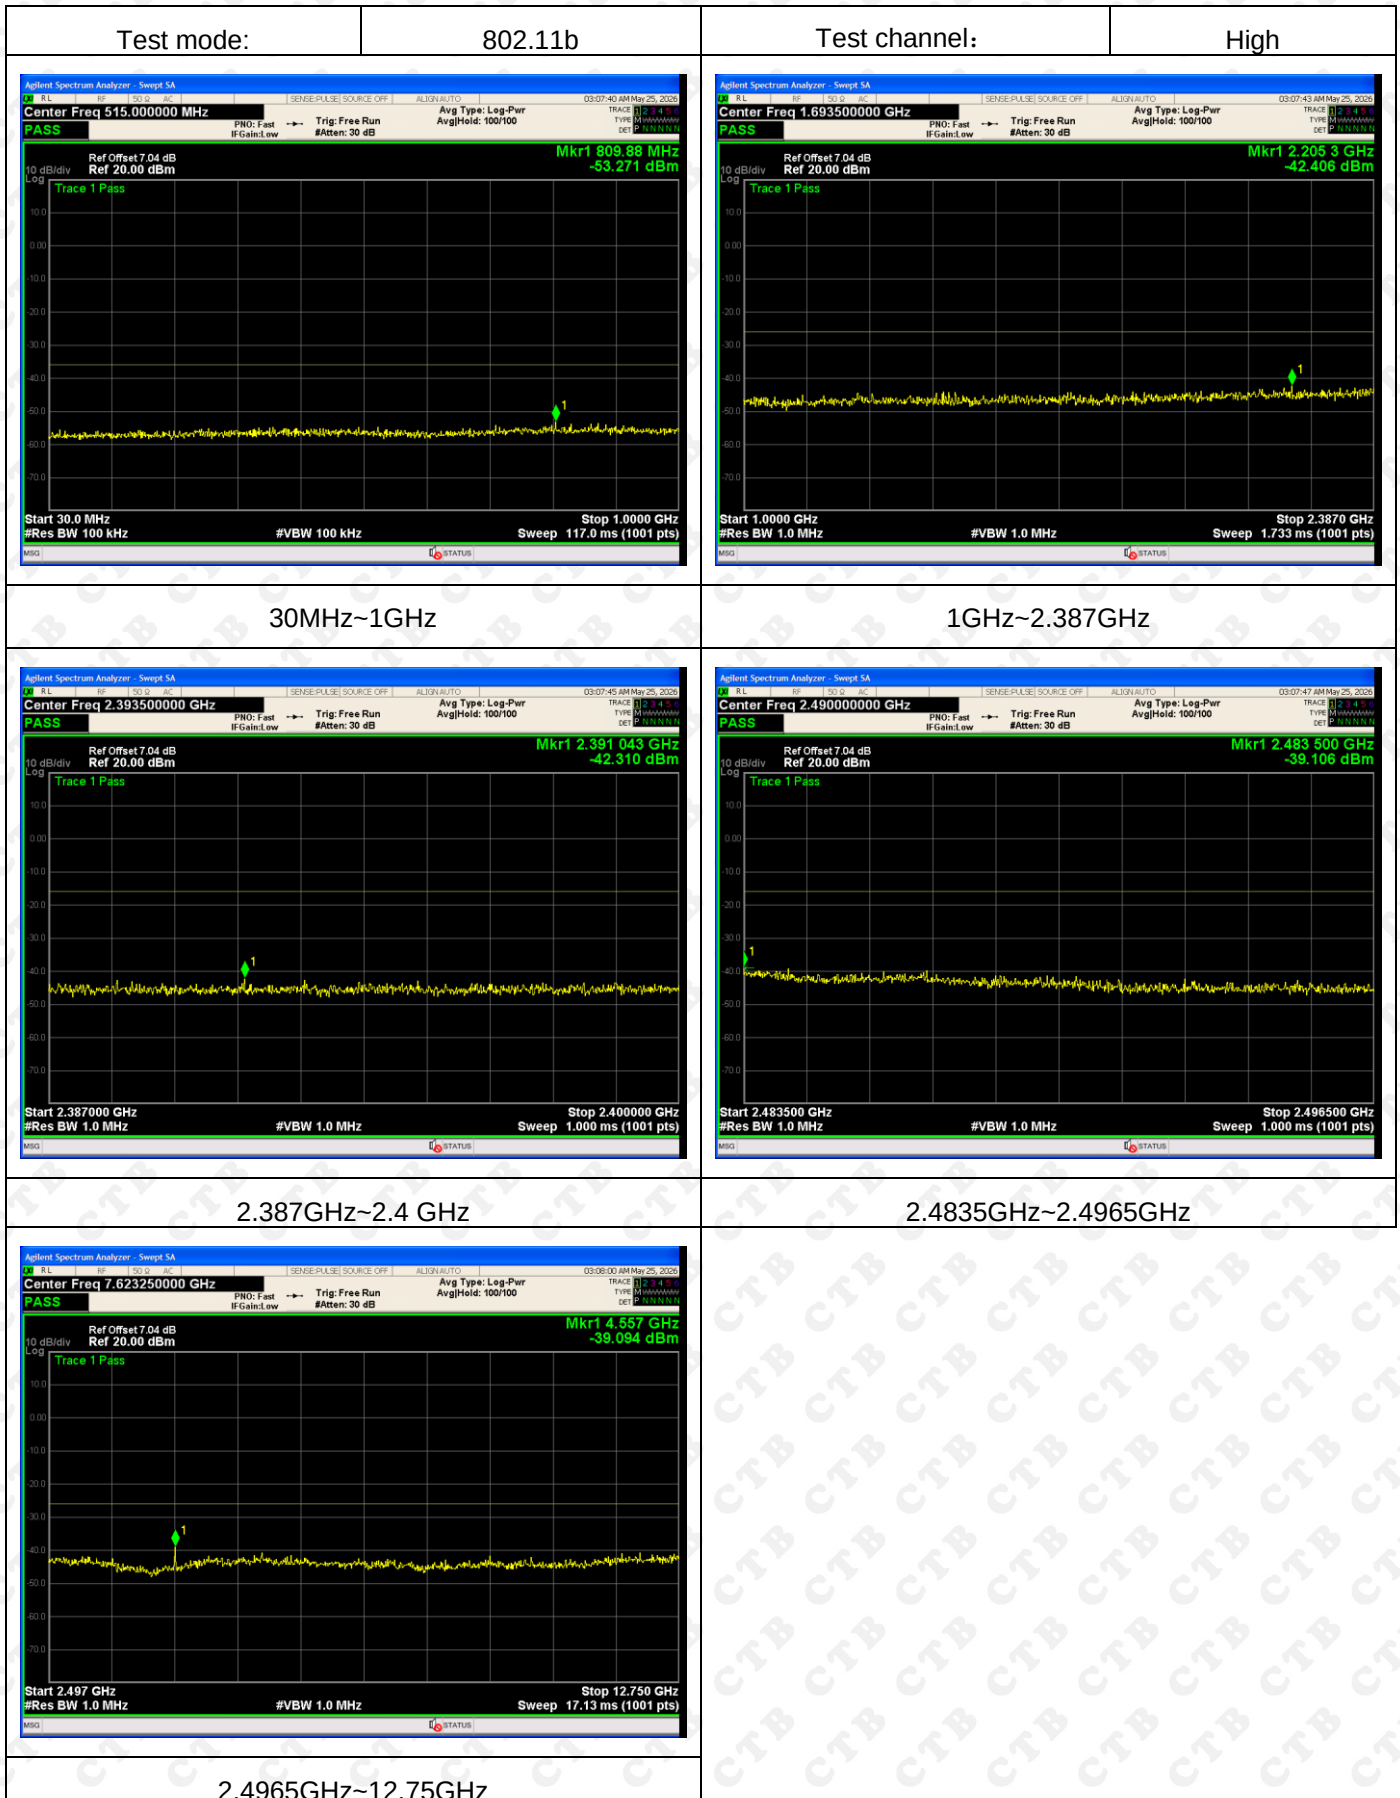

ANT 1


Test mode	Test Channel	Test freq. range	Emission Frequency (MHz)	Test result (dBm/MHz)	Test result (uW/MHz)	limits (uW/MHz)	Result
802.11g	Low	30MHz≤f≤1000MHz	873.9	-43.89	0.408	2.5	PASS
		1000MHz < f≤2387MHz	2328.75	-42.41	0.057	2.5	PASS
		2387MHz < f≤2400MHz	2399.99	-25.58	2.767	25	PASS
		2483.5MHz≤f < 2496.5MHz	2491.77	-42.68	0.054	25	PASS
		2496.5MHz≤f < 12750MHz	5203.42	-39.66	0.108	2.5	PASS
	Middle	30MHz≤f≤1000MHz	842.86	-42.87	0.052	2.5	PASS
		1000MHz < f≤2387MHz	2366.19	-42.26	0.059	2.5	PASS
		2387MHz < f≤2400MHz	2391.33	-42.56	0.055	25	PASS
		2483.5MHz≤f < 2496.5MHz	2486.45	-41.17	0.076	25	PASS
		2496.5MHz≤f < 12750MHz	4557.45	-38.59	0.138	2.5	PASS
	High	30MHz≤f≤1000MHz	899.12	-43.56	0.044	2.5	PASS
		1000MHz < f≤2387MHz	2384.23	-41.38	0.073	2.5	PASS
		2387MHz < f≤2400MHz	2399.51	-42.44	0.057	25	PASS
		2483.5MHz≤f < 2496.5MHz	2483.72	-26.48	2.249	25	PASS
		2496.5MHz≤f < 12750MHz	5828.89	-39.52	0.112	2.5	PASS


ANT 2

Test mode	Test Channel	Test freq. range	Emission Frequency (MHz)	Test result (dBm/MHz)	Test result (uW/MHz)	limits (uW/MHz)	Result
802.11g	Low	30MHz≤f≤1000MHz	472.32	-43.51	0.446	2.5	PASS
		1000MHz < f≤2387MHz	2363.42	-42.07	0.062	2.5	PASS
		2387MHz < f≤2400MHz	2399.99	-27.58	1.746	25	PASS
		2483.5MHz≤f < 2496.5MHz	2494.82	-42.61	0.055	25	PASS
		2496.5MHz≤f < 12750MHz	5100.89	-36.96	0.201	2.5	PASS
	Middle	30MHz≤f≤1000MHz	868.08	-43.76	0.042	2.5	PASS
		1000MHz < f≤2387MHz	2294.07	-42.94	0.051	2.5	PASS
		2387MHz < f≤2400MHz	2393.1	-42.53	0.056	25	PASS
		2483.5MHz≤f < 2496.5MHz	2496.29	-42.21	0.060	25	PASS
		2496.5MHz≤f < 12750MHz	12750	-40.67	0.086	2.5	PASS
	High	30MHz≤f≤1000MHz	901.06	-43.69	0.043	2.5	PASS
		1000MHz < f≤2387MHz	2227.5	-42.39	0.058	2.5	PASS
		2387MHz < f≤2400MHz	2395.59	-41.83	0.066	25	PASS
		2483.5MHz≤f < 2496.5MHz	2483.6	-26.67	2.153	25	PASS
		2496.5MHz≤f < 12750MHz	5244.44	-36.84	0.207	2.5	PASS


ANT 1:




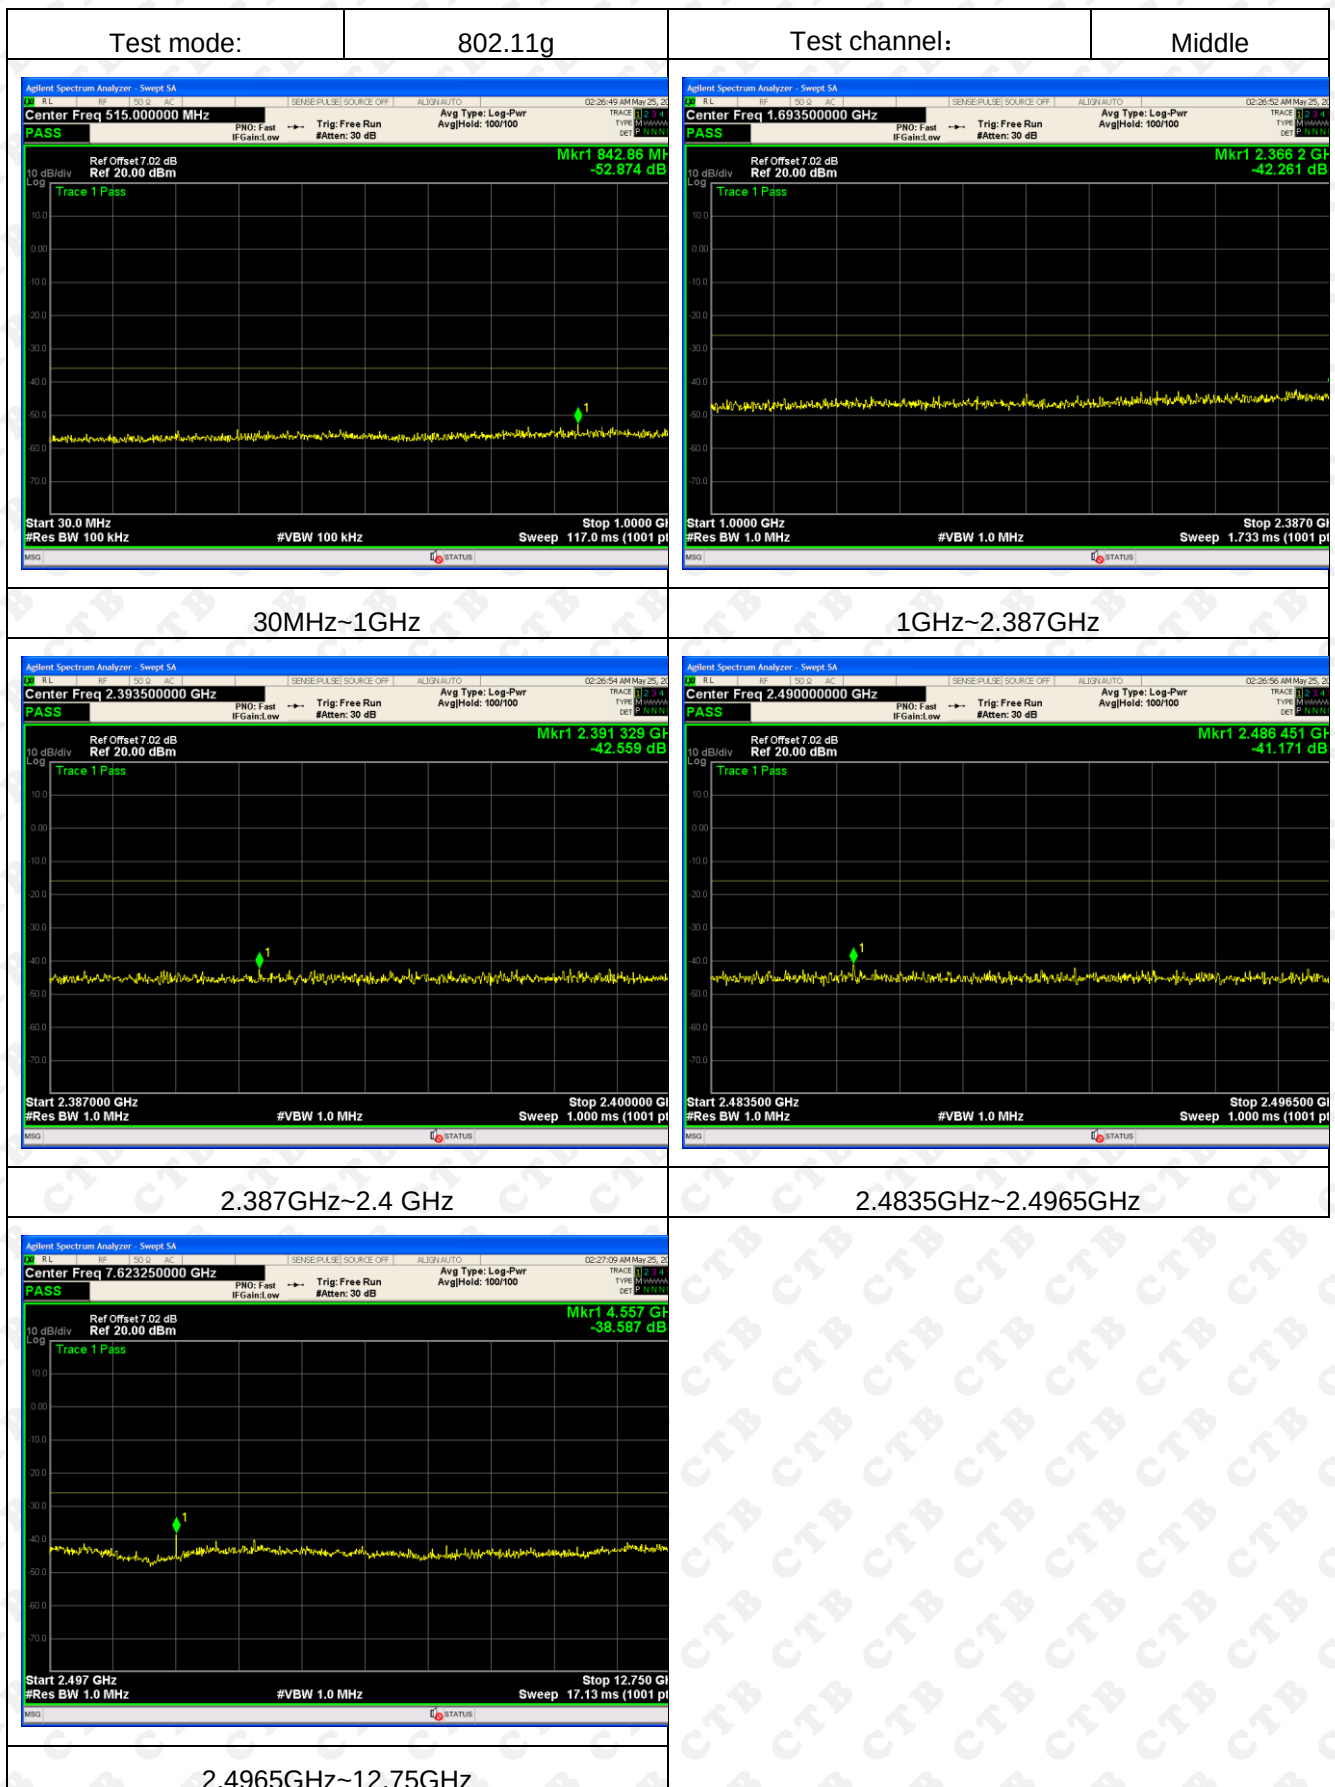


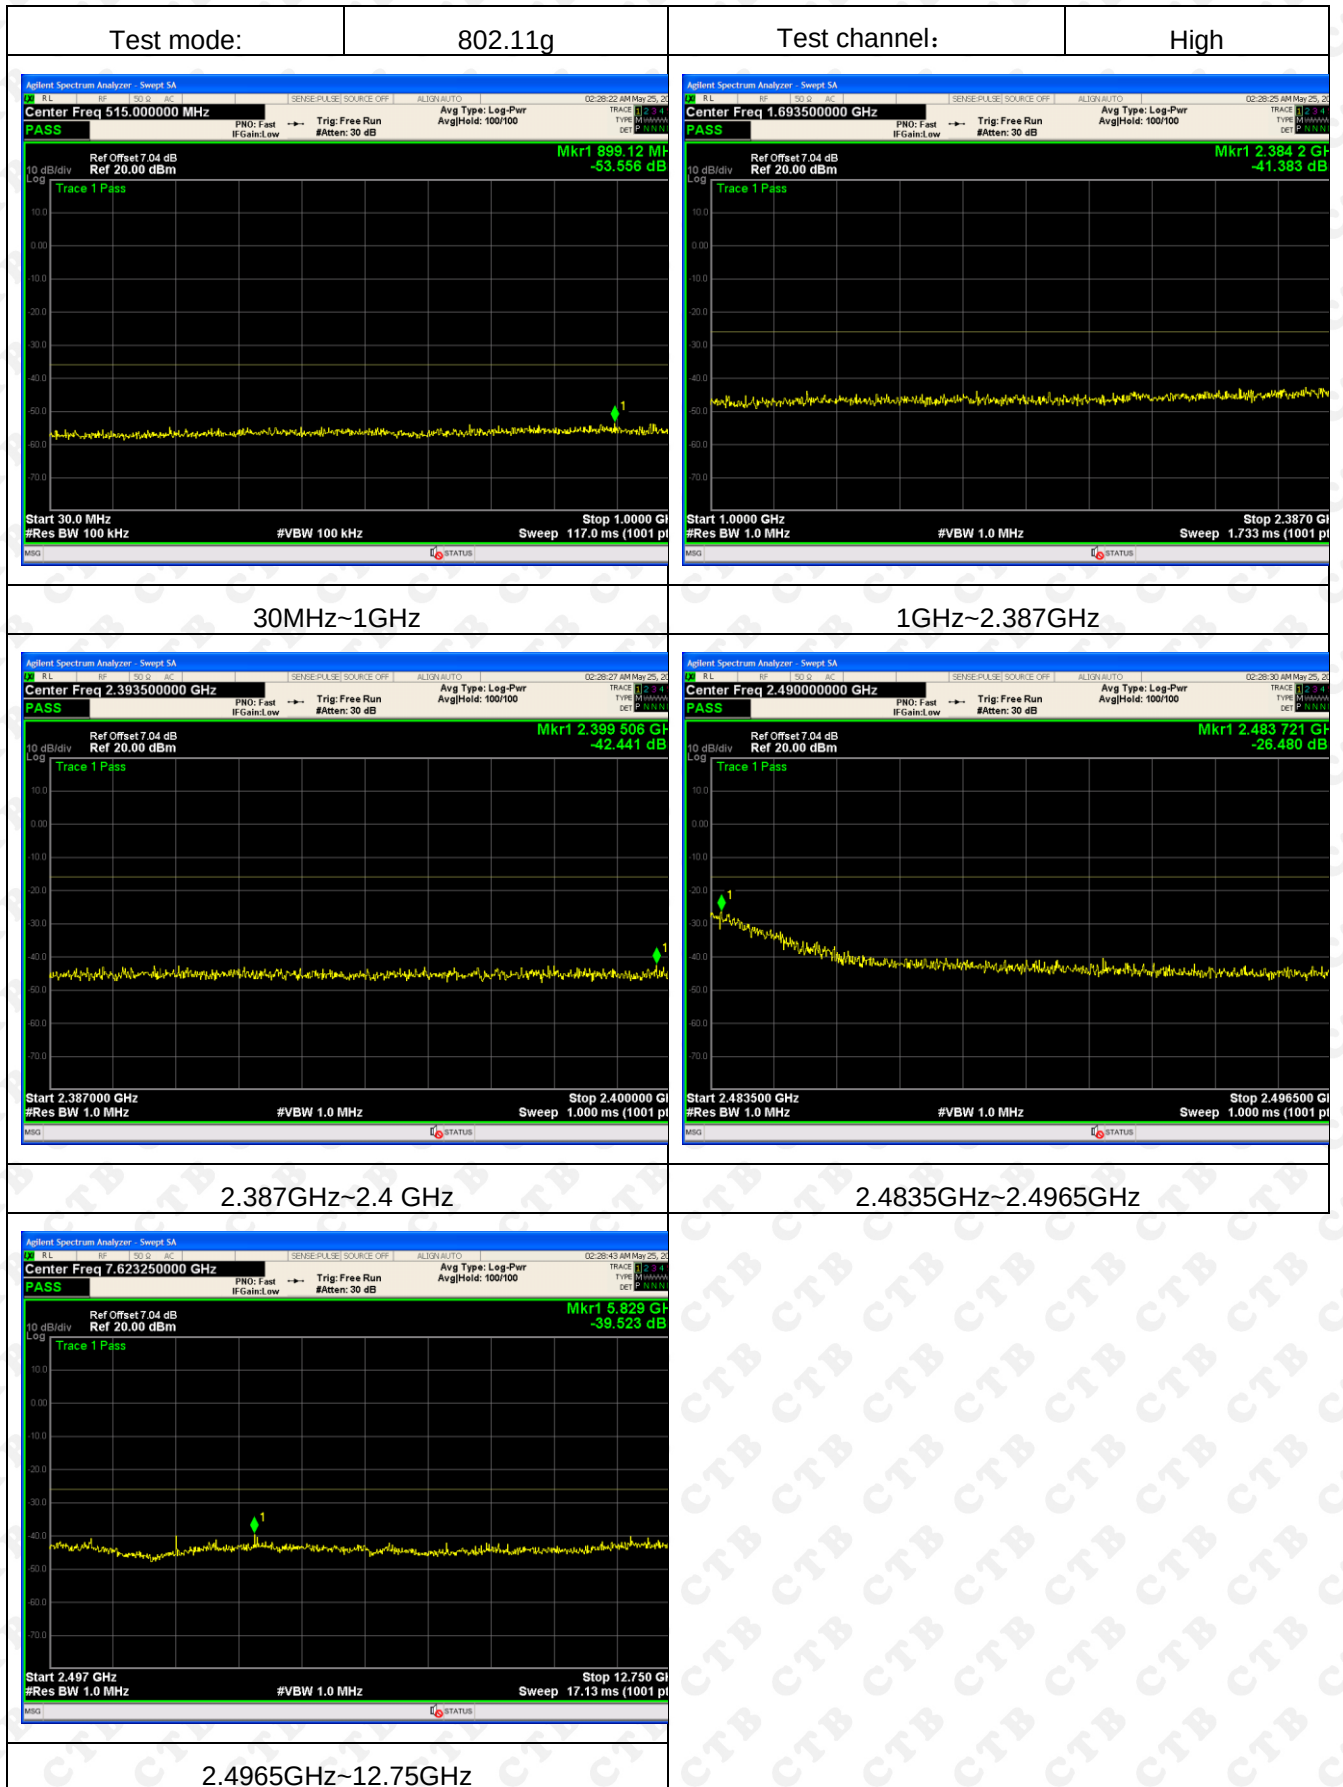

ANT 2:

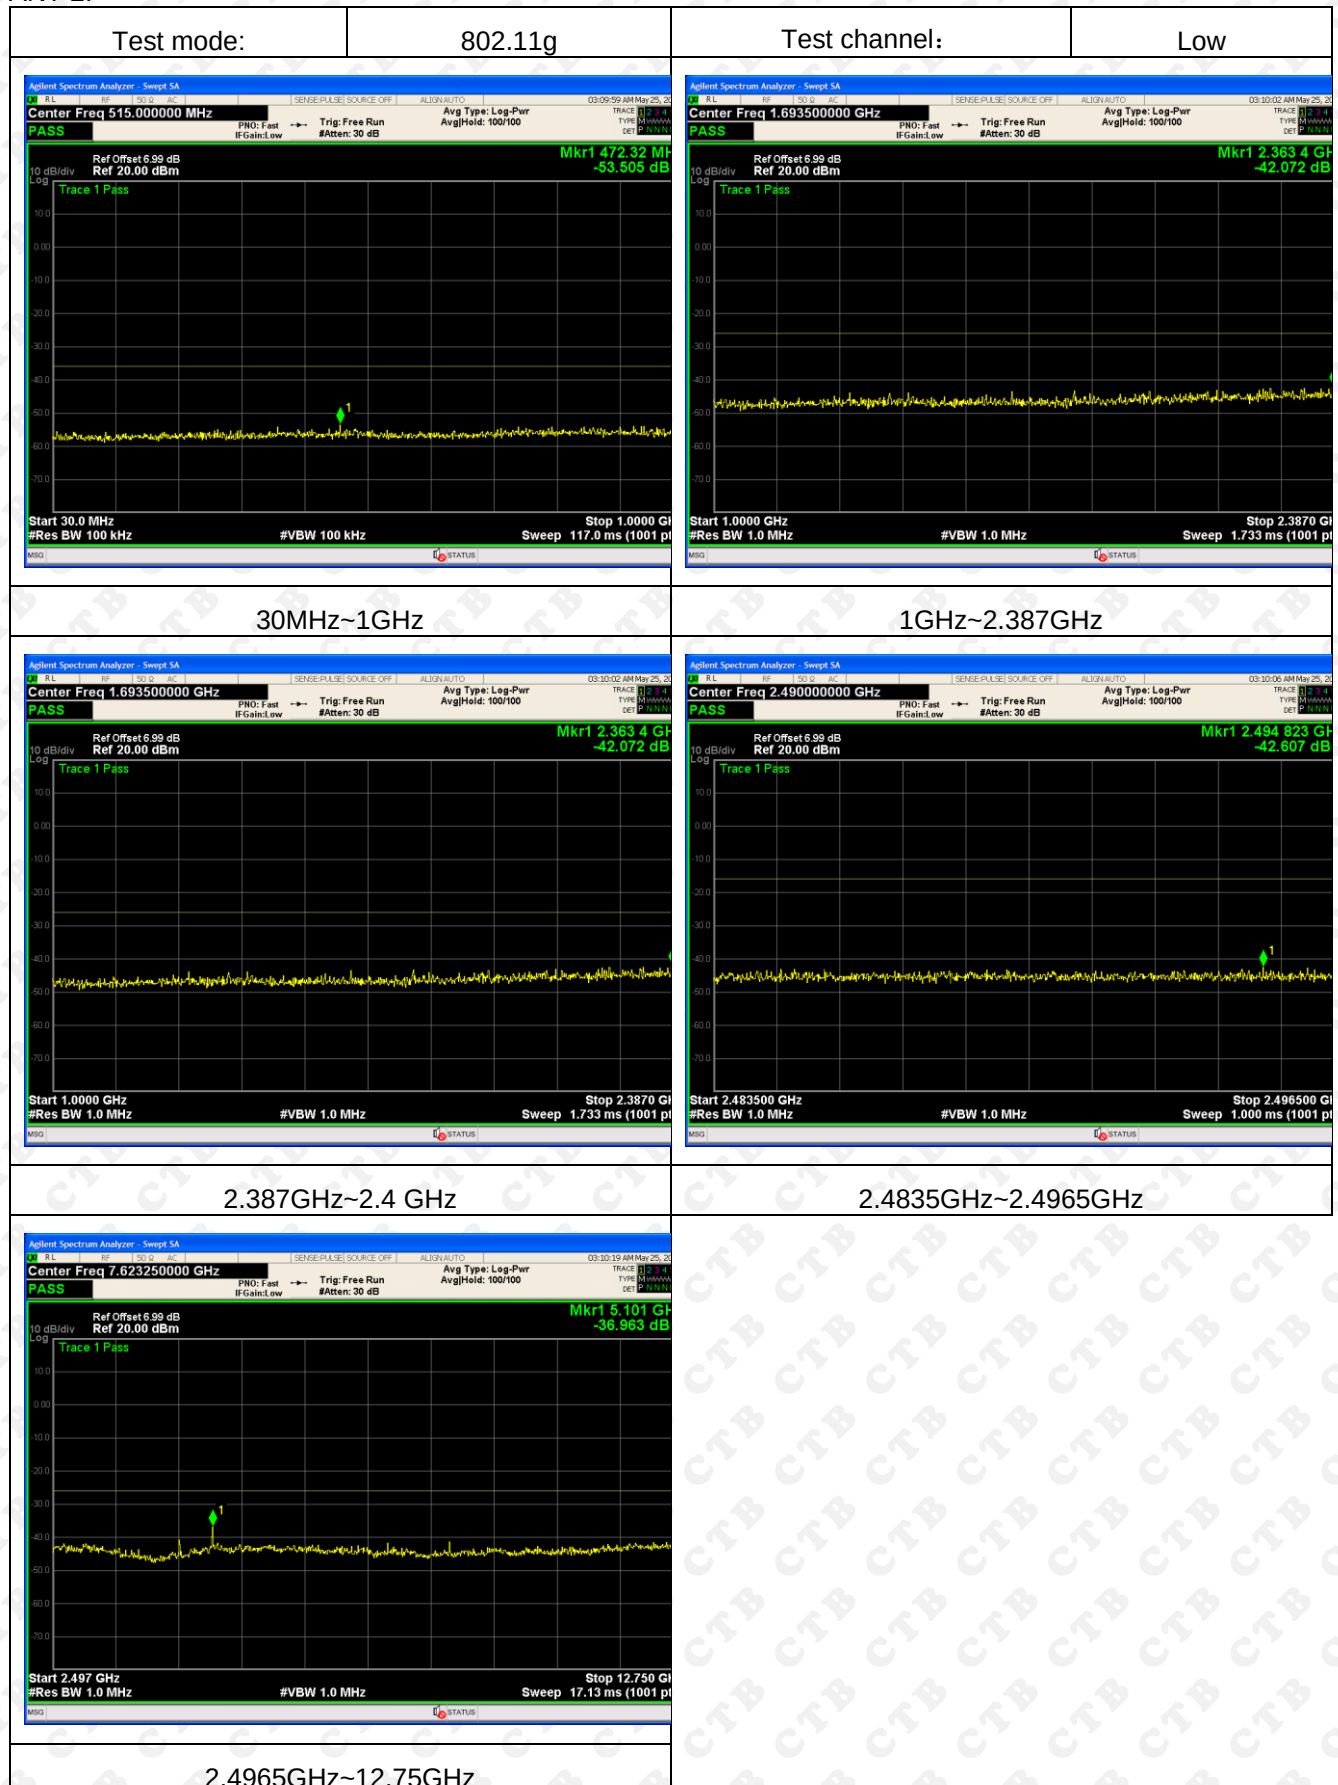

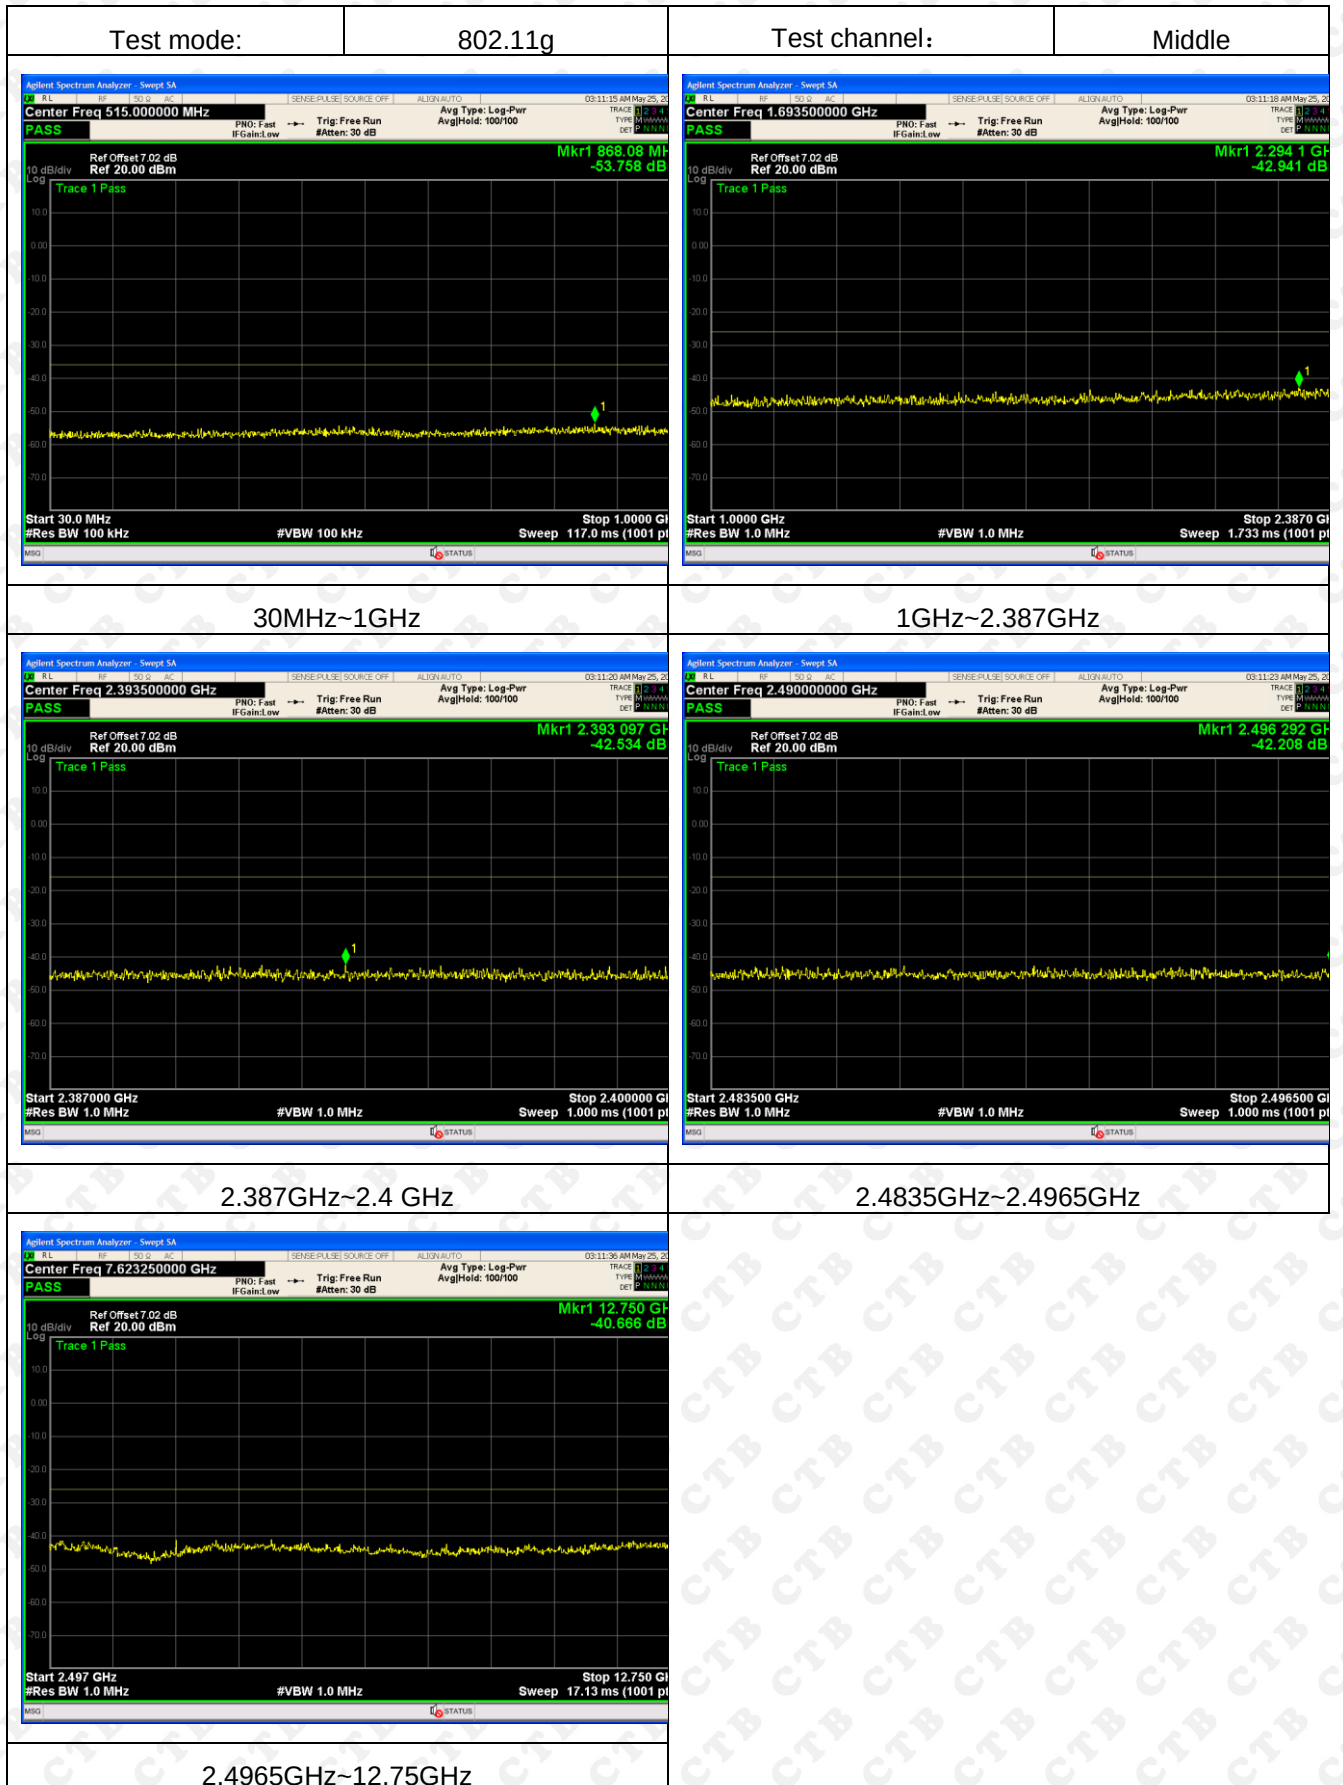

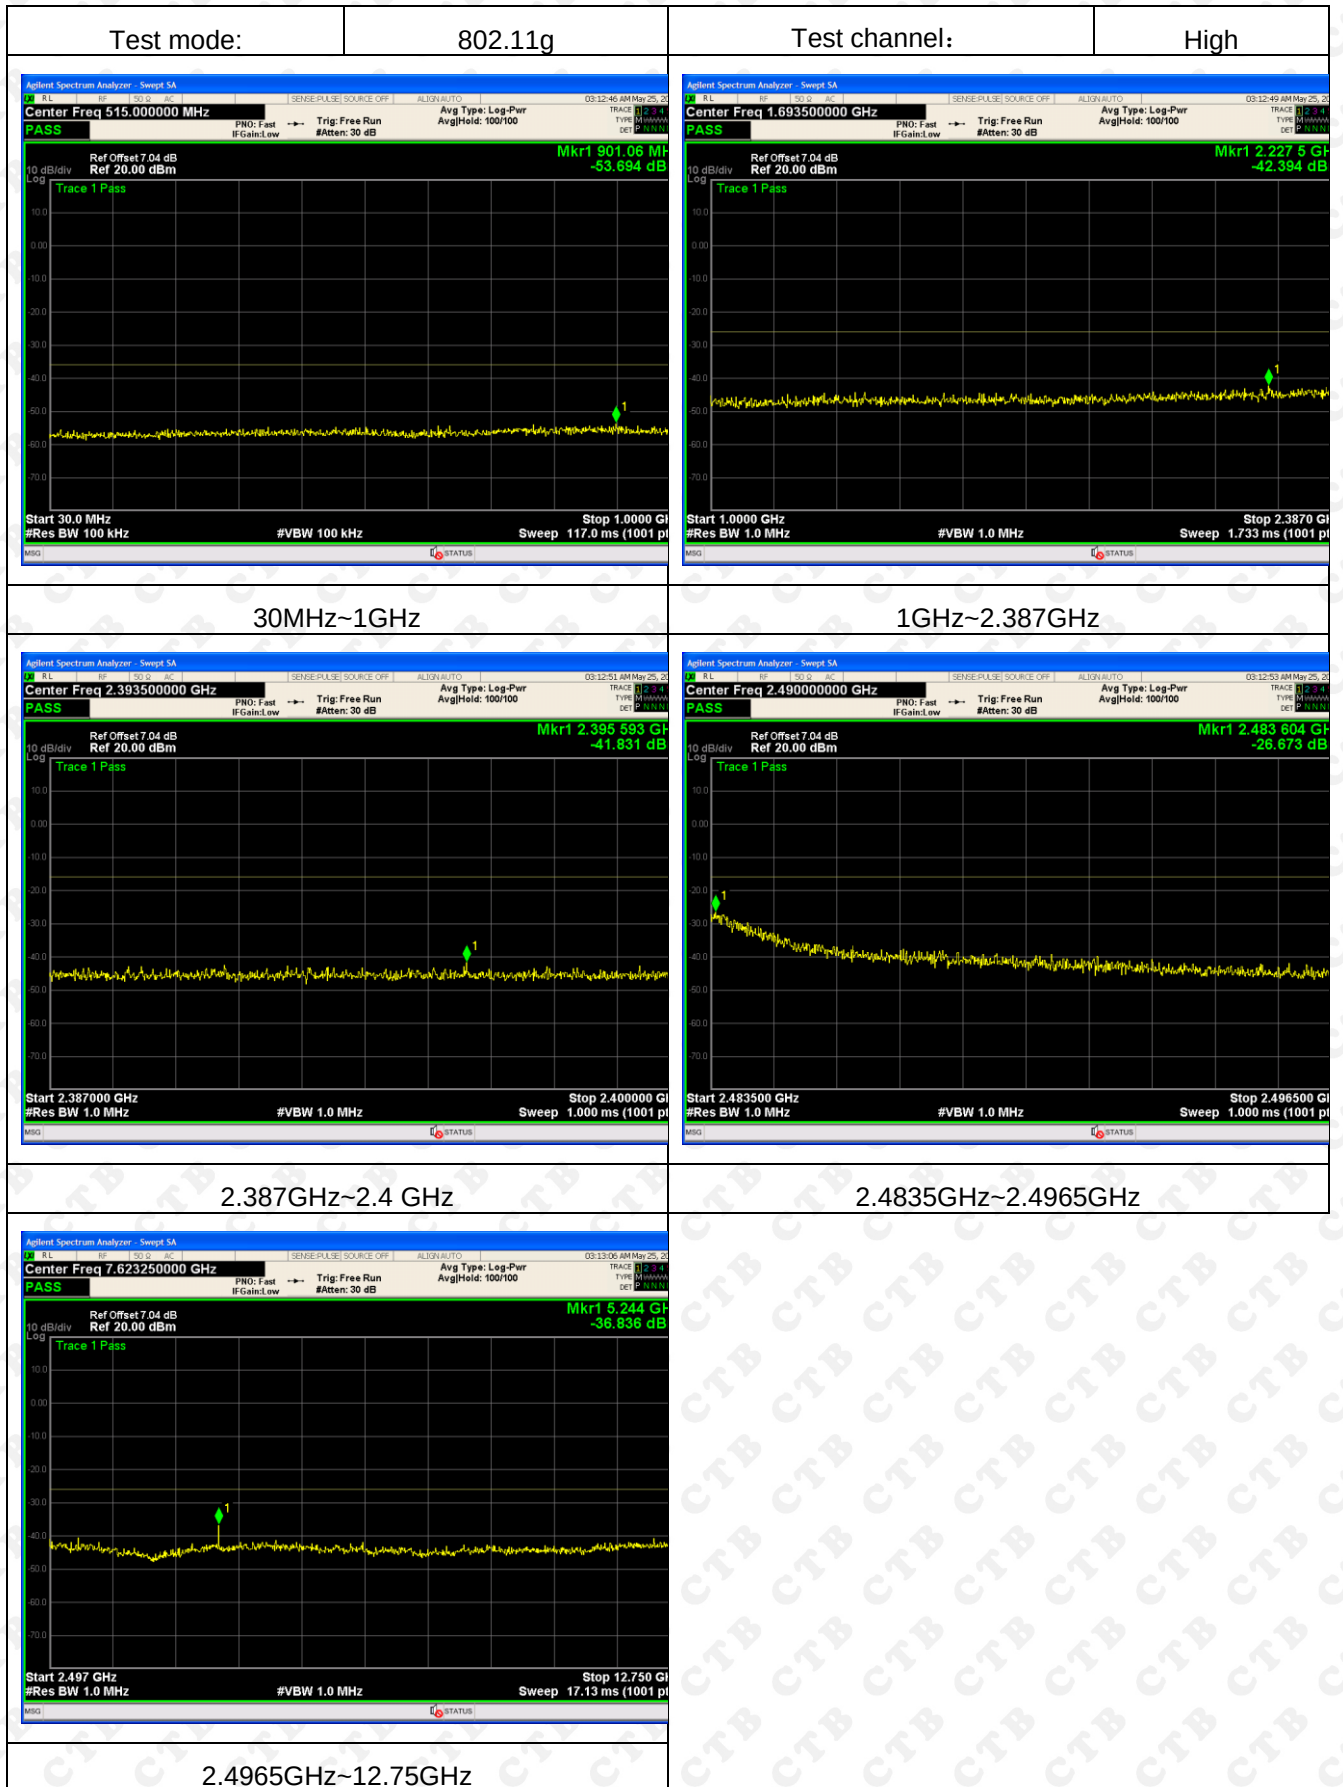


ANT 1

Test mode	Test Channel	Test freq. range	Emission Frequency (MHz)	Test result (dBm/MHz)	Test result (uW/MHz)	limits (uW/MHz)	Result
802.11n 20	Low	30MHz≤f≤1000MHz	843.83	-43.61	0.436	2.5	PASS
		1000MHz < f≤2387MHz	2173.4	-42.06	0.062	2.5	PASS
		2387MHz < f≤2400MHz	2399.99	-27.07	1.963	25	PASS
		2483.5MHz≤f < 2496.5MHz	2485.81	-42.31	0.059	25	PASS
		2496.5MHz≤f < 12750MHz	4557.45	-40.82	0.083	2.5	PASS
	Middle	30MHz≤f≤1000MHz	901.06	-43.61	0.044	2.5	PASS
		1000MHz < f≤2387MHz	2256.62	-42.41	0.057	2.5	PASS
		2387MHz < f≤2400MHz	2389.11	-42.54	0.056	25	PASS
		2483.5MHz≤f < 2496.5MHz	2492.56	-42.76	0.053	25	PASS
		2496.5MHz≤f < 12750MHz	5828.89	-34.86	0.327	2.5	PASS
	High	30MHz≤f≤1000MHz	823.46	-43.48	0.045	2.5	PASS
		1000MHz < f≤2387MHz	2344	-42.04	0.063	2.5	PASS
		2387MHz < f≤2400MHz	2399.47	-42.36	0.058	25	PASS
		2483.5MHz≤f < 2496.5MHz	2483.6	-24.78	3.327	25	PASS
		2496.5MHz≤f < 12750MHz	5818.63	-38.85	0.130	2.5	PASS

ANT 2

Test mode	Test Channel	Test freq. range	Emission Frequency (MHz)	Test result (dBm/MHz)	Test result (uW/MHz)	limits (uW/MHz)	Result
802.11n 20	Low	30MHz≤f≤1000MHz	863.23	-42.07	0.621	2.5	PASS
		1000MHz < f≤2387MHz	2291.3	-42.16	0.061	2.5	PASS
		2387MHz < f≤2400MHz	2399.99	-25.74	2.667	25	PASS
		2483.5MHz≤f < 2496.5MHz	2486.67	-42.07	0.062	25	PASS
		2496.5MHz≤f < 12750MHz	5213.68	-39.71	0.107	2.5	PASS
	Middle	30MHz≤f≤1000MHz	868.08	-43.42	0.045	2.5	PASS
		1000MHz < f≤2387MHz	2233.04	-42.7	0.054	2.5	PASS
		2387MHz < f≤2400MHz	2396.76	-42.09	0.062	25	PASS
		2483.5MHz≤f < 2496.5MHz	2485.28	-41.76	0.067	25	PASS
		2496.5MHz≤f < 12750MHz	5203.42	-39.26	0.119	2.5	PASS
	High	30MHz≤f≤1000MHz	682.81	-43.39	0.046	2.5	PASS
		1000MHz < f≤2387MHz	2337.07	-41.73	0.067	2.5	PASS
		2387MHz < f≤2400MHz	2389.59	-42.17	0.061	25	PASS
		2483.5MHz≤f < 2496.5MHz	2483.51	-25.29	2.958	25	PASS
		2496.5MHz≤f < 12750MHz	2773.34	-40.46	0.090	2.5	PASS

ANT 1:


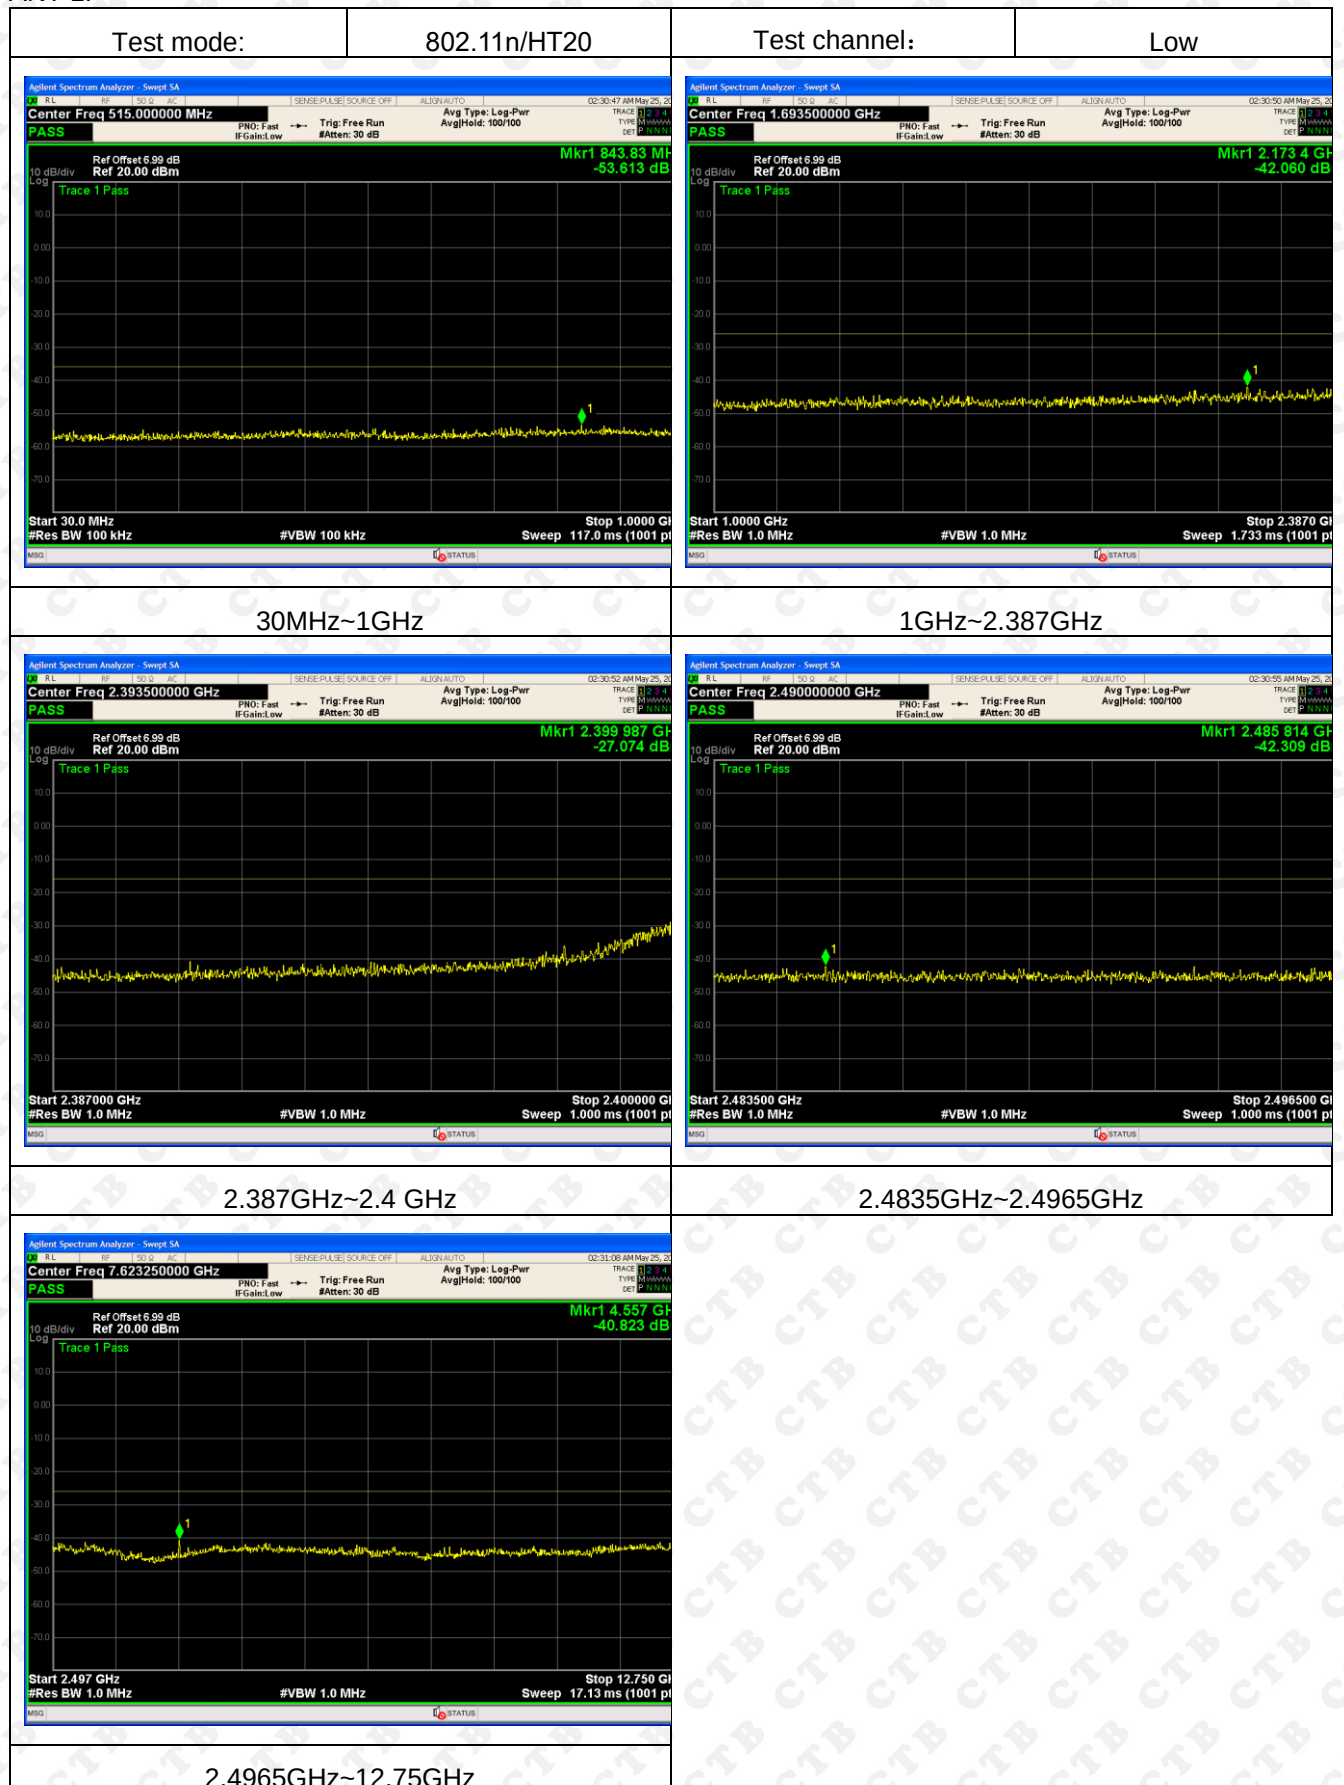


Test mode:

802.11n/HT20



Test channel:

Middle

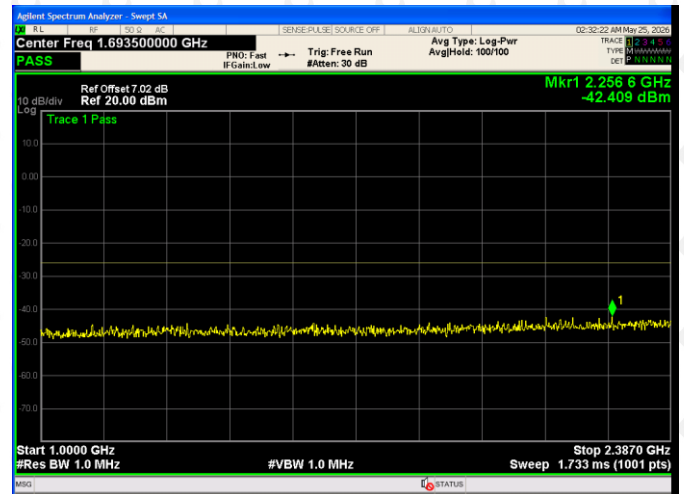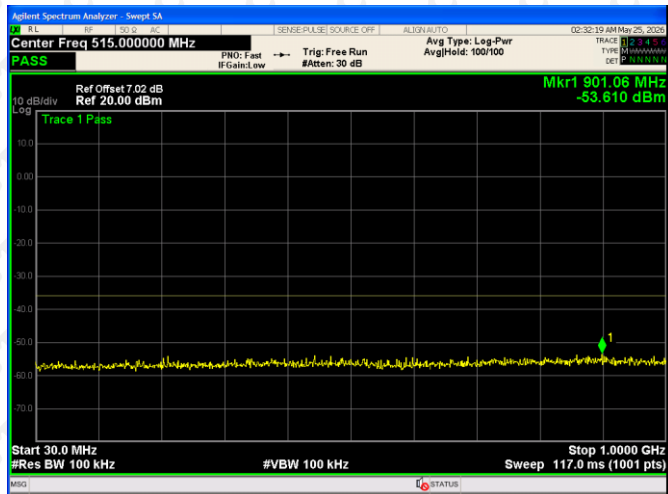


30MHz~1GHz

1GHz~2.387GHz

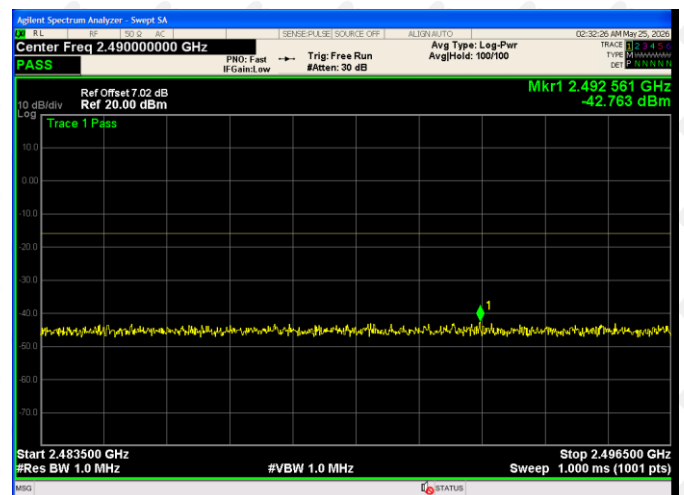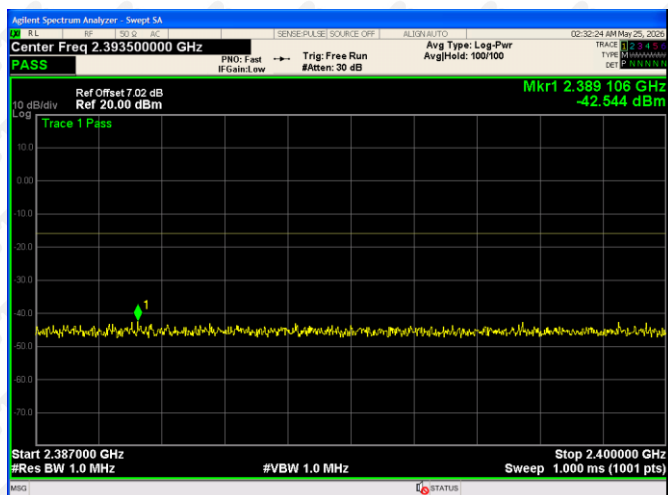

2.387GHz~2.4 GHz

2.4835GHz~2.4965GHz

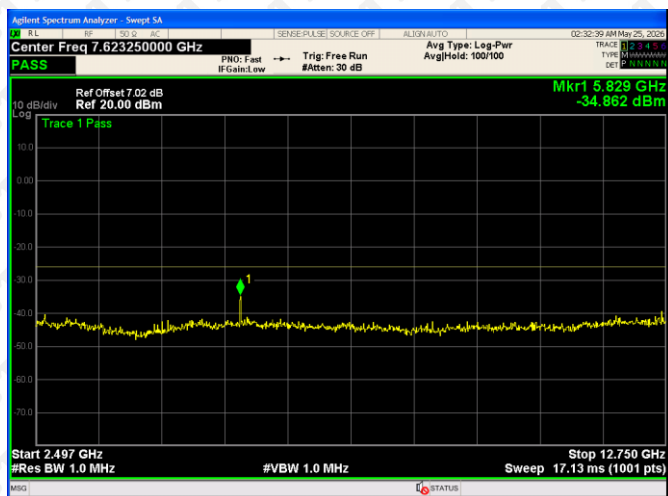



2.4965GHz~12.75GHz

Test mode:


802.11n/HT20

Test channel:


High

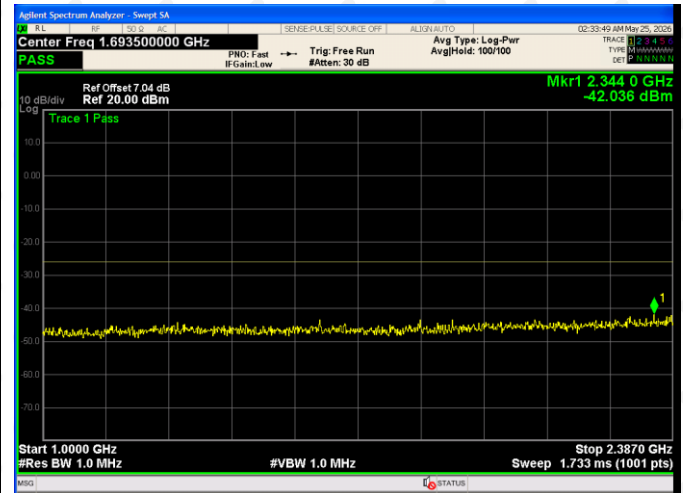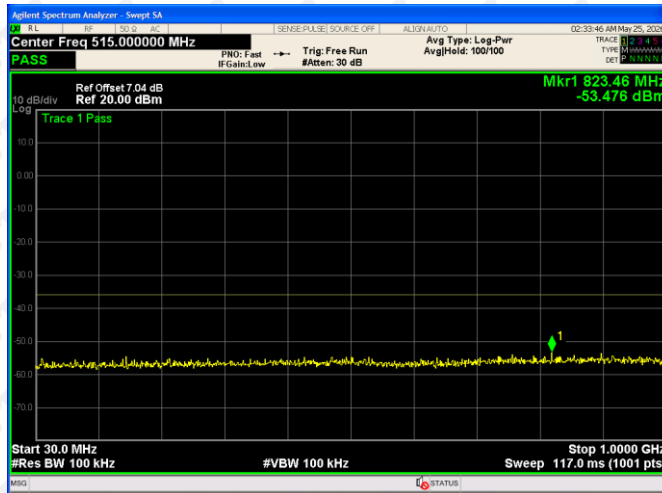


30MHz~1GHz

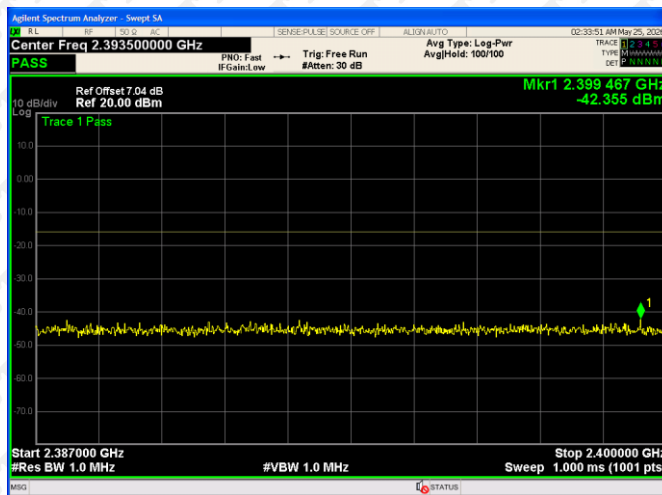

1GHz~2.387GHz

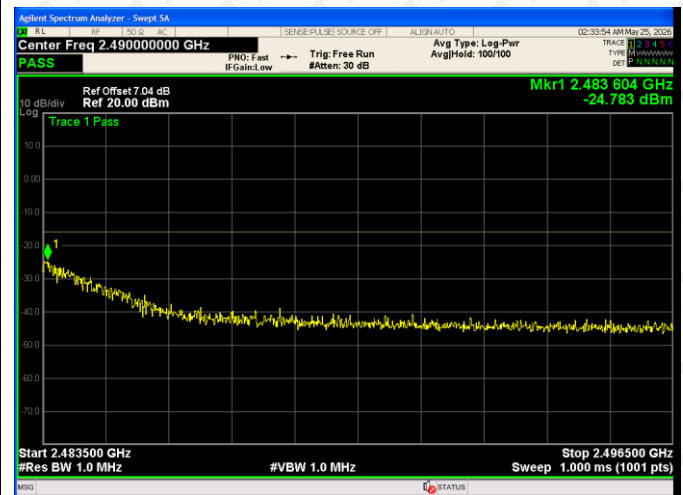

2.387GHz~2.4 GHz

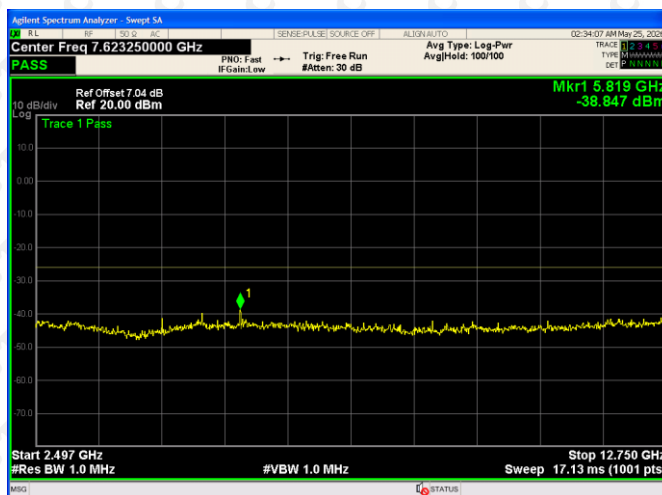



2.4835GHz~2.4965GHz

2.4965GHz~12.75GHz

ANT 2:



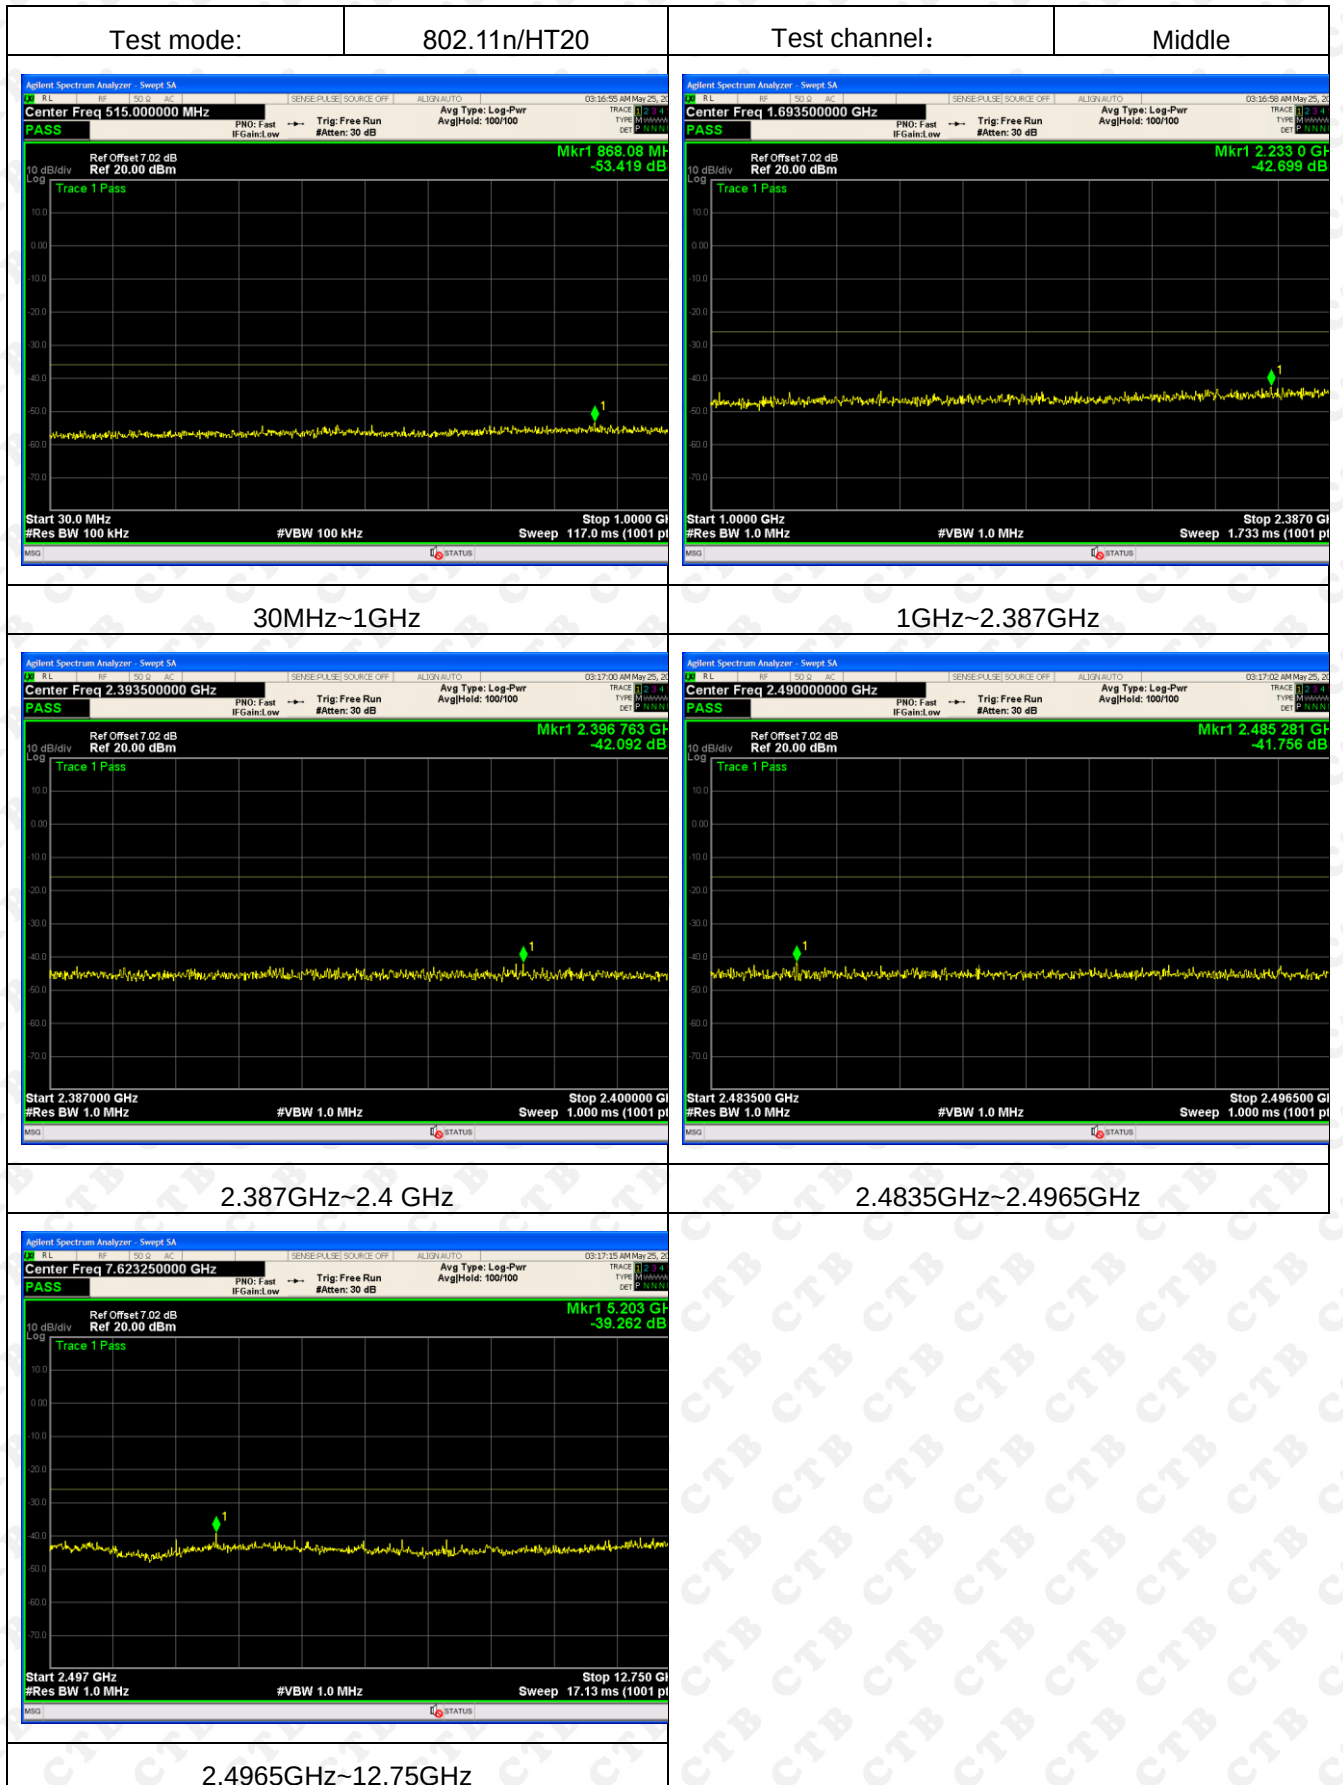

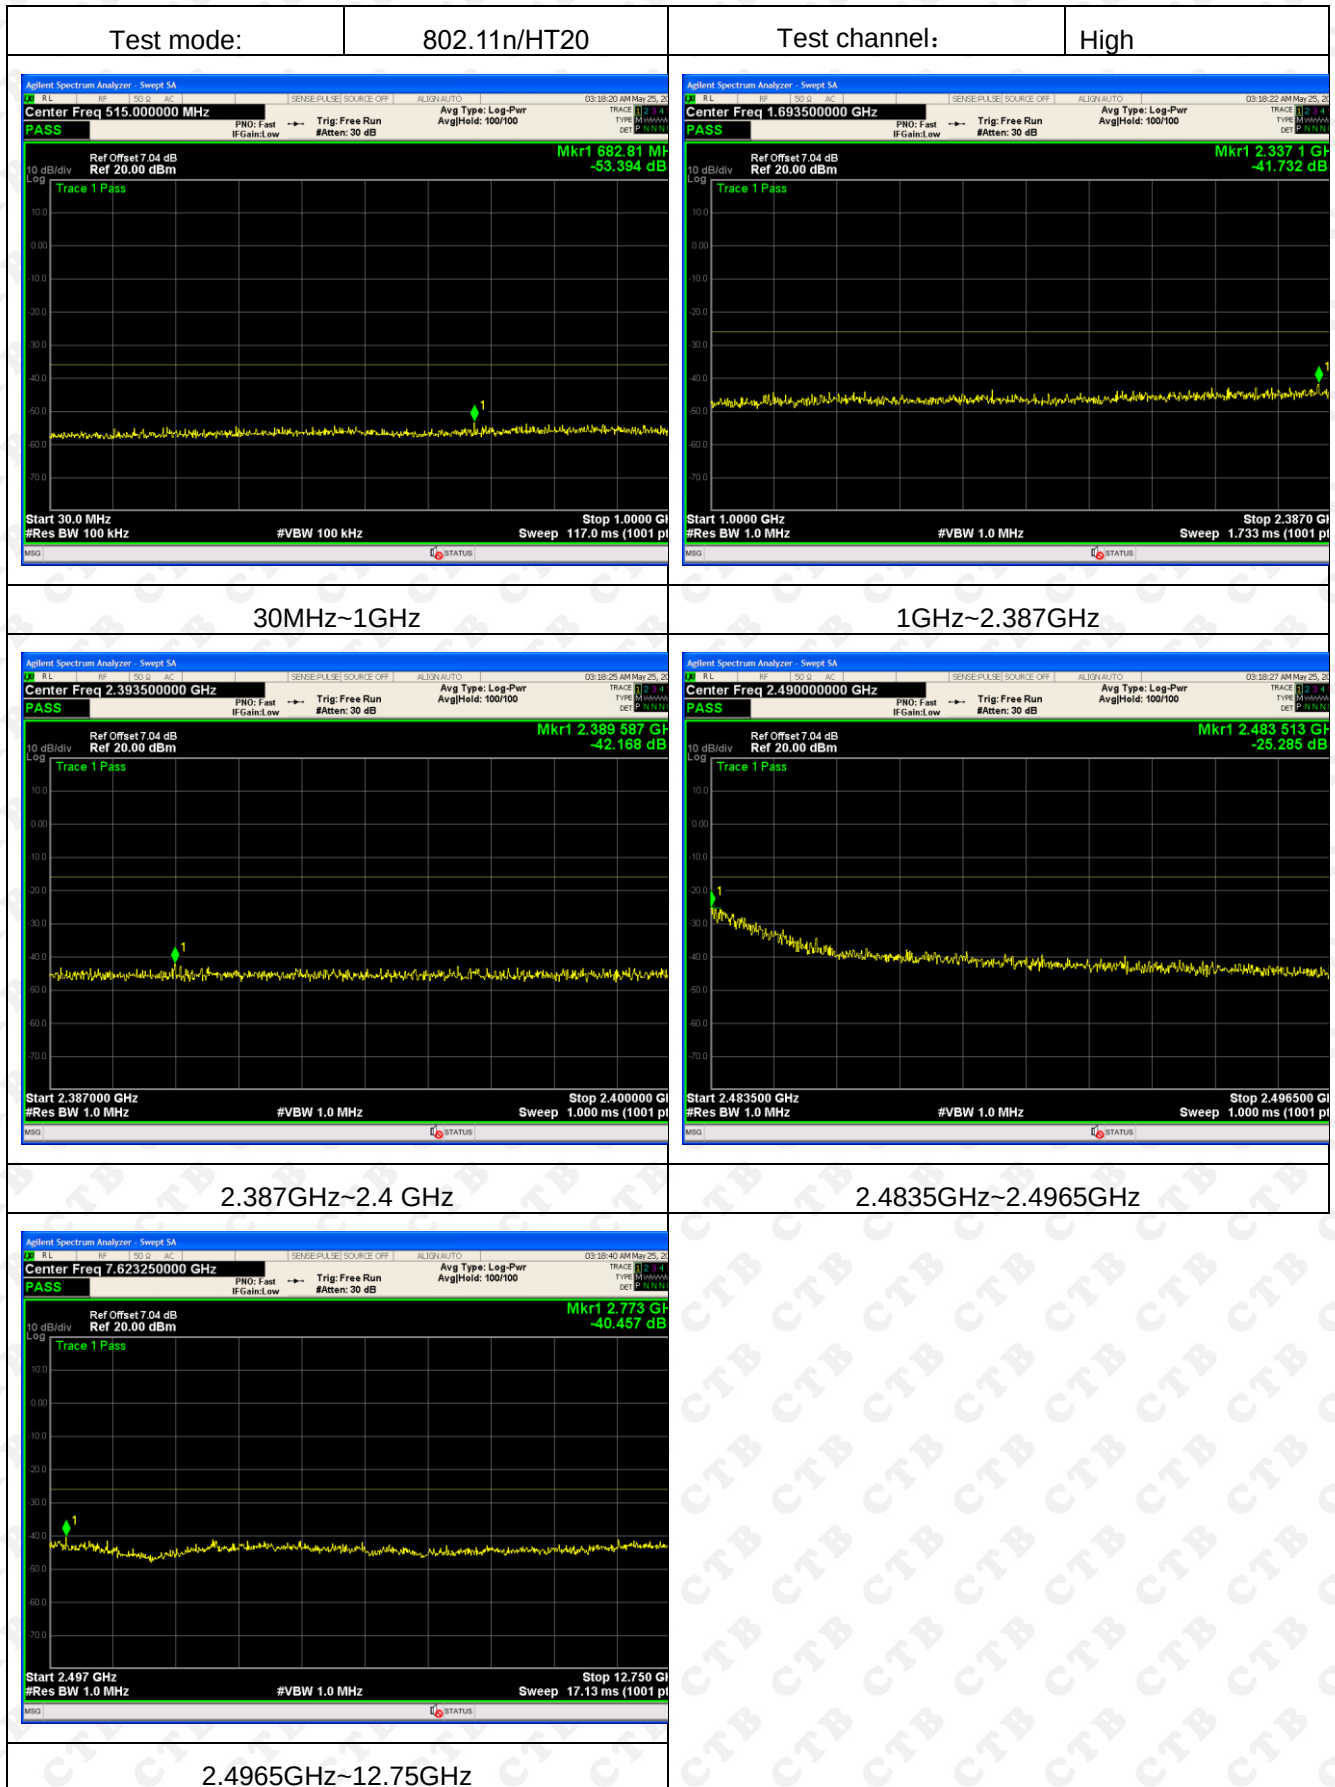


ANT 1


Test mode	Test Channel	Test freq. range	Emission Frequency (MHz)	Test result (dBm/MHz)	Test result (uW/MHz)	limits (uW/MHz)	Result
802.11n 40	Low	30MHz≤f≤1000MHz	475.23	-43.31	0.467	2.5	PASS
		1000MHz < f≤2387MHz	2387	-40.95	0.080	2.5	PASS
		2387MHz < f≤2400MHz	2399.97	-23.93	4.046	25	PASS
		2483.5MHz≤f < 2496.5MHz	2491.92	-41.89	0.065	25	PASS
		2496.5MHz≤f < 12750MHz	4557.45	-39.36	0.116	2.5	PASS
	Middle	30MHz≤f≤1000MHz	891.36	-42.92	0.051	2.5	PASS
		1000MHz < f≤2387MHz	2381.45	-42.1	0.062	2.5	PASS
		2387MHz < f≤2400MHz	2396.5	-40.93	0.081	25	PASS
		2483.5MHz≤f < 2496.5MHz	2484.64	-40.59	0.087	25	PASS
		2496.5MHz≤f < 12750MHz	2670.81	-40.48	0.090	2.5	PASS
	High	30MHz≤f≤1000MHz	823.46	-42.94	0.051	2.5	PASS
		1000MHz < f≤2387MHz	2262.17	-42.32	0.059	2.5	PASS
		2387MHz < f≤2400MHz	2399.45	-42.37	0.058	25	PASS
		2483.5MHz≤f < 2496.5MHz	2483.6	-26.38	2.301	25	PASS
		2496.5MHz≤f < 12750MHz	5828.89	-36.83	0.207	2.5	PASS


ANT 2

Test mode	Test Channel	Test freq. range	Emission Frequency (MHz)	Test result (dBm/MHz)	Test result (uW/MHz)	limits (uW/MHz)	Result
802.11n 40	Low	30MHz≤f≤1000MHz	773.99	-43.45	0.452	2.5	PASS
		1000MHz < f≤2387MHz	2384.23	-40.46	0.090	2.5	PASS
		2387MHz < f≤2400MHz	2399.99	-23.84	4.130	25	PASS
		2483.5MHz≤f < 2496.5MHz	2484.51	-41.84	0.065	25	PASS
		2496.5MHz≤f < 12750MHz	5203.42	-40.79	0.083	2.5	PASS
	Middle	30MHz≤f≤1000MHz	870.99	-43.09	0.049	2.5	PASS
		1000MHz < f≤2387MHz	2362.03	-42.06	0.062	2.5	PASS
		2387MHz < f≤2400MHz	2397.82	-39.99	0.100	25	PASS
		2483.5MHz≤f < 2496.5MHz	2484.94	-38.34	0.147	25	PASS
		2496.5MHz≤f < 12750MHz	4557.45	-40.52	0.089	2.5	PASS
	High	30MHz≤f≤1000MHz	885.54	-43.78	0.042	2.5	PASS
		1000MHz < f≤2387MHz	2312.1	-41.95	0.064	2.5	PASS
		2387MHz < f≤2400MHz	2396.36	-41.63	0.069	25	PASS
		2483.5MHz≤f < 2496.5MHz	2483.55	-25.58	2.767	25	PASS
		2496.5MHz≤f < 12750MHz	2496.5	-34.88	0.325	2.5	PASS


ANT 1:

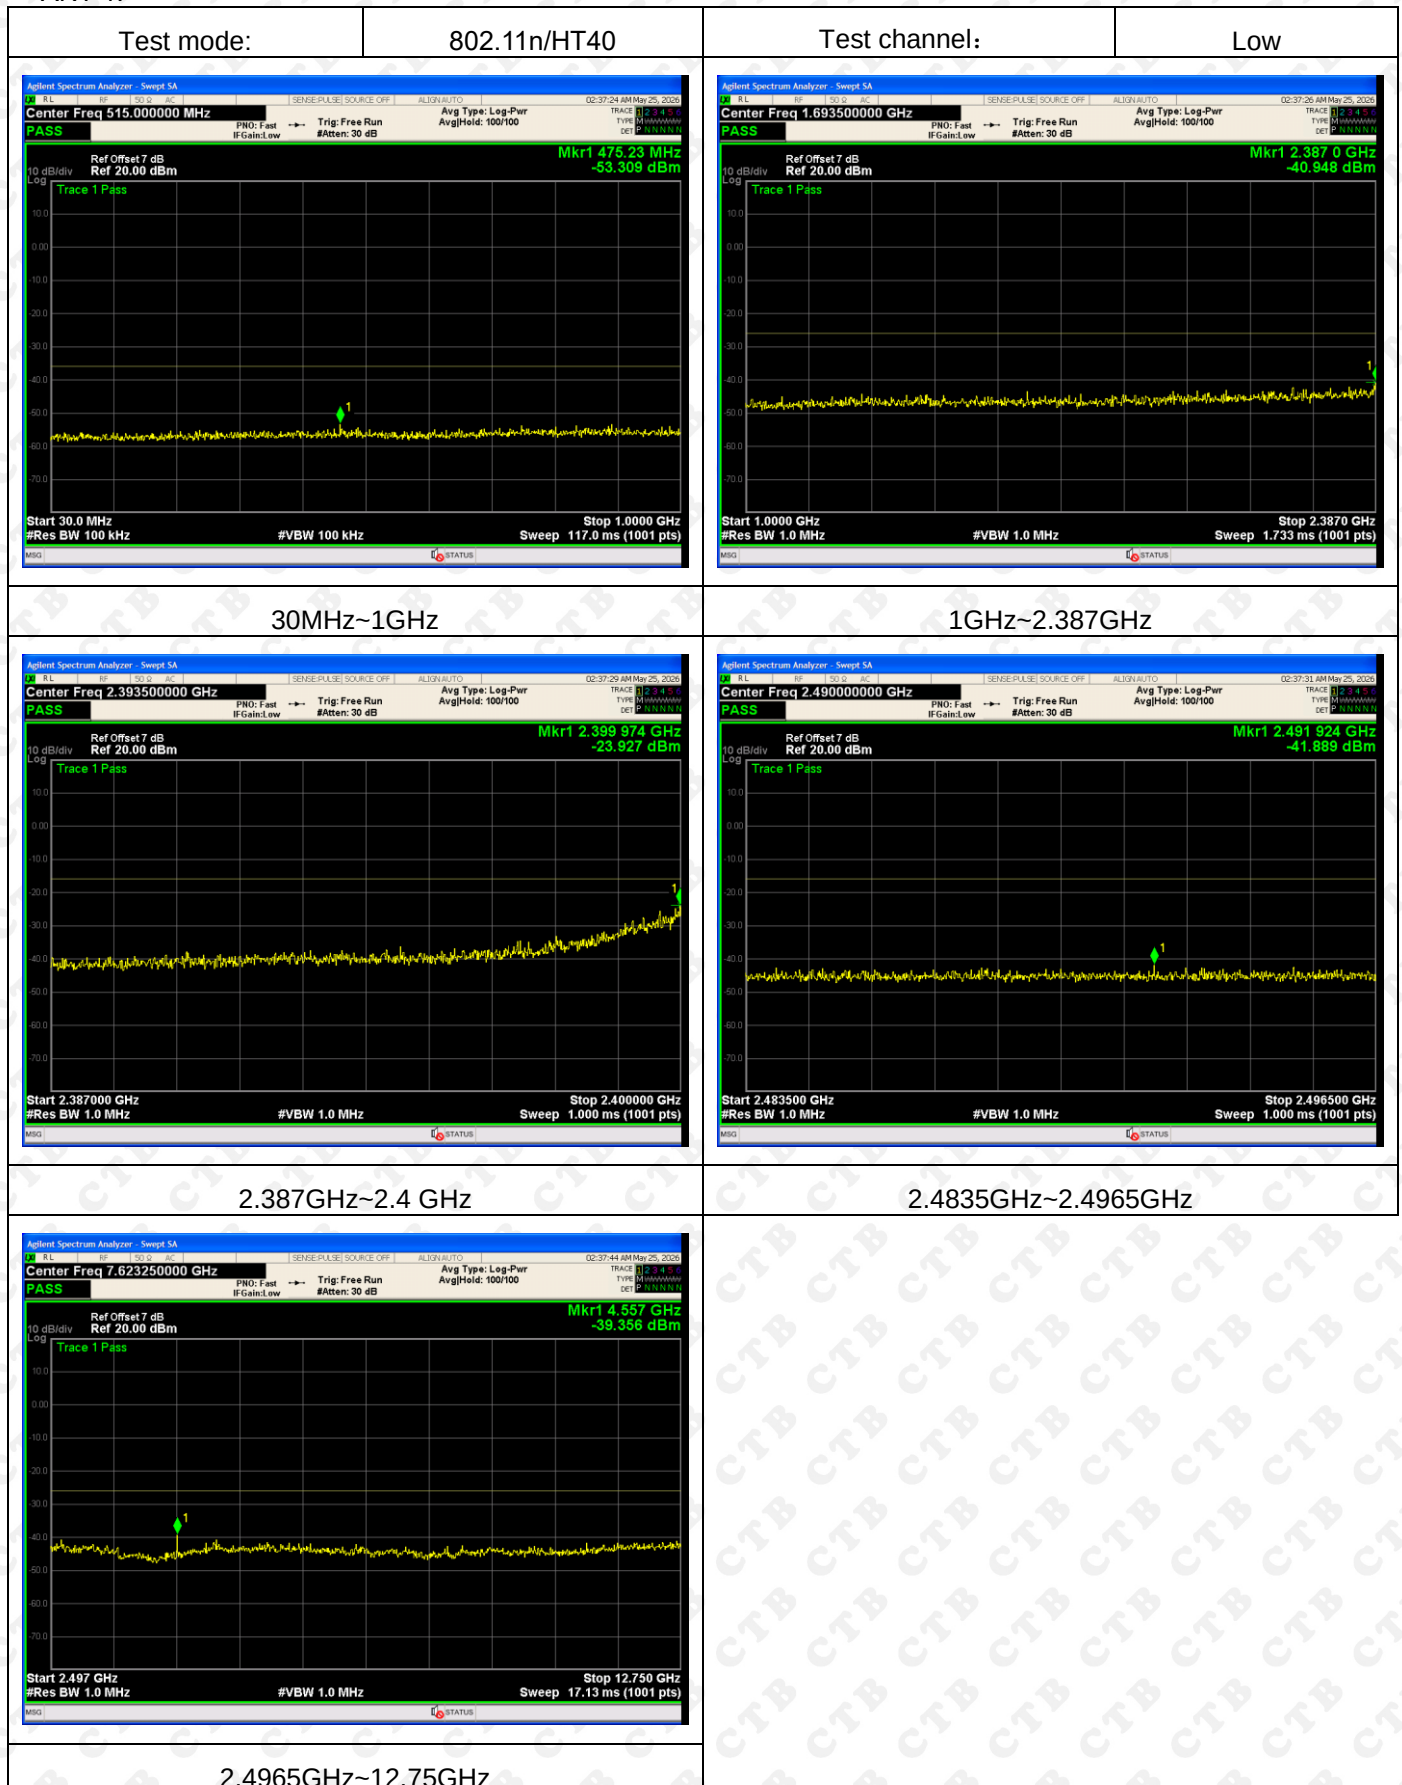


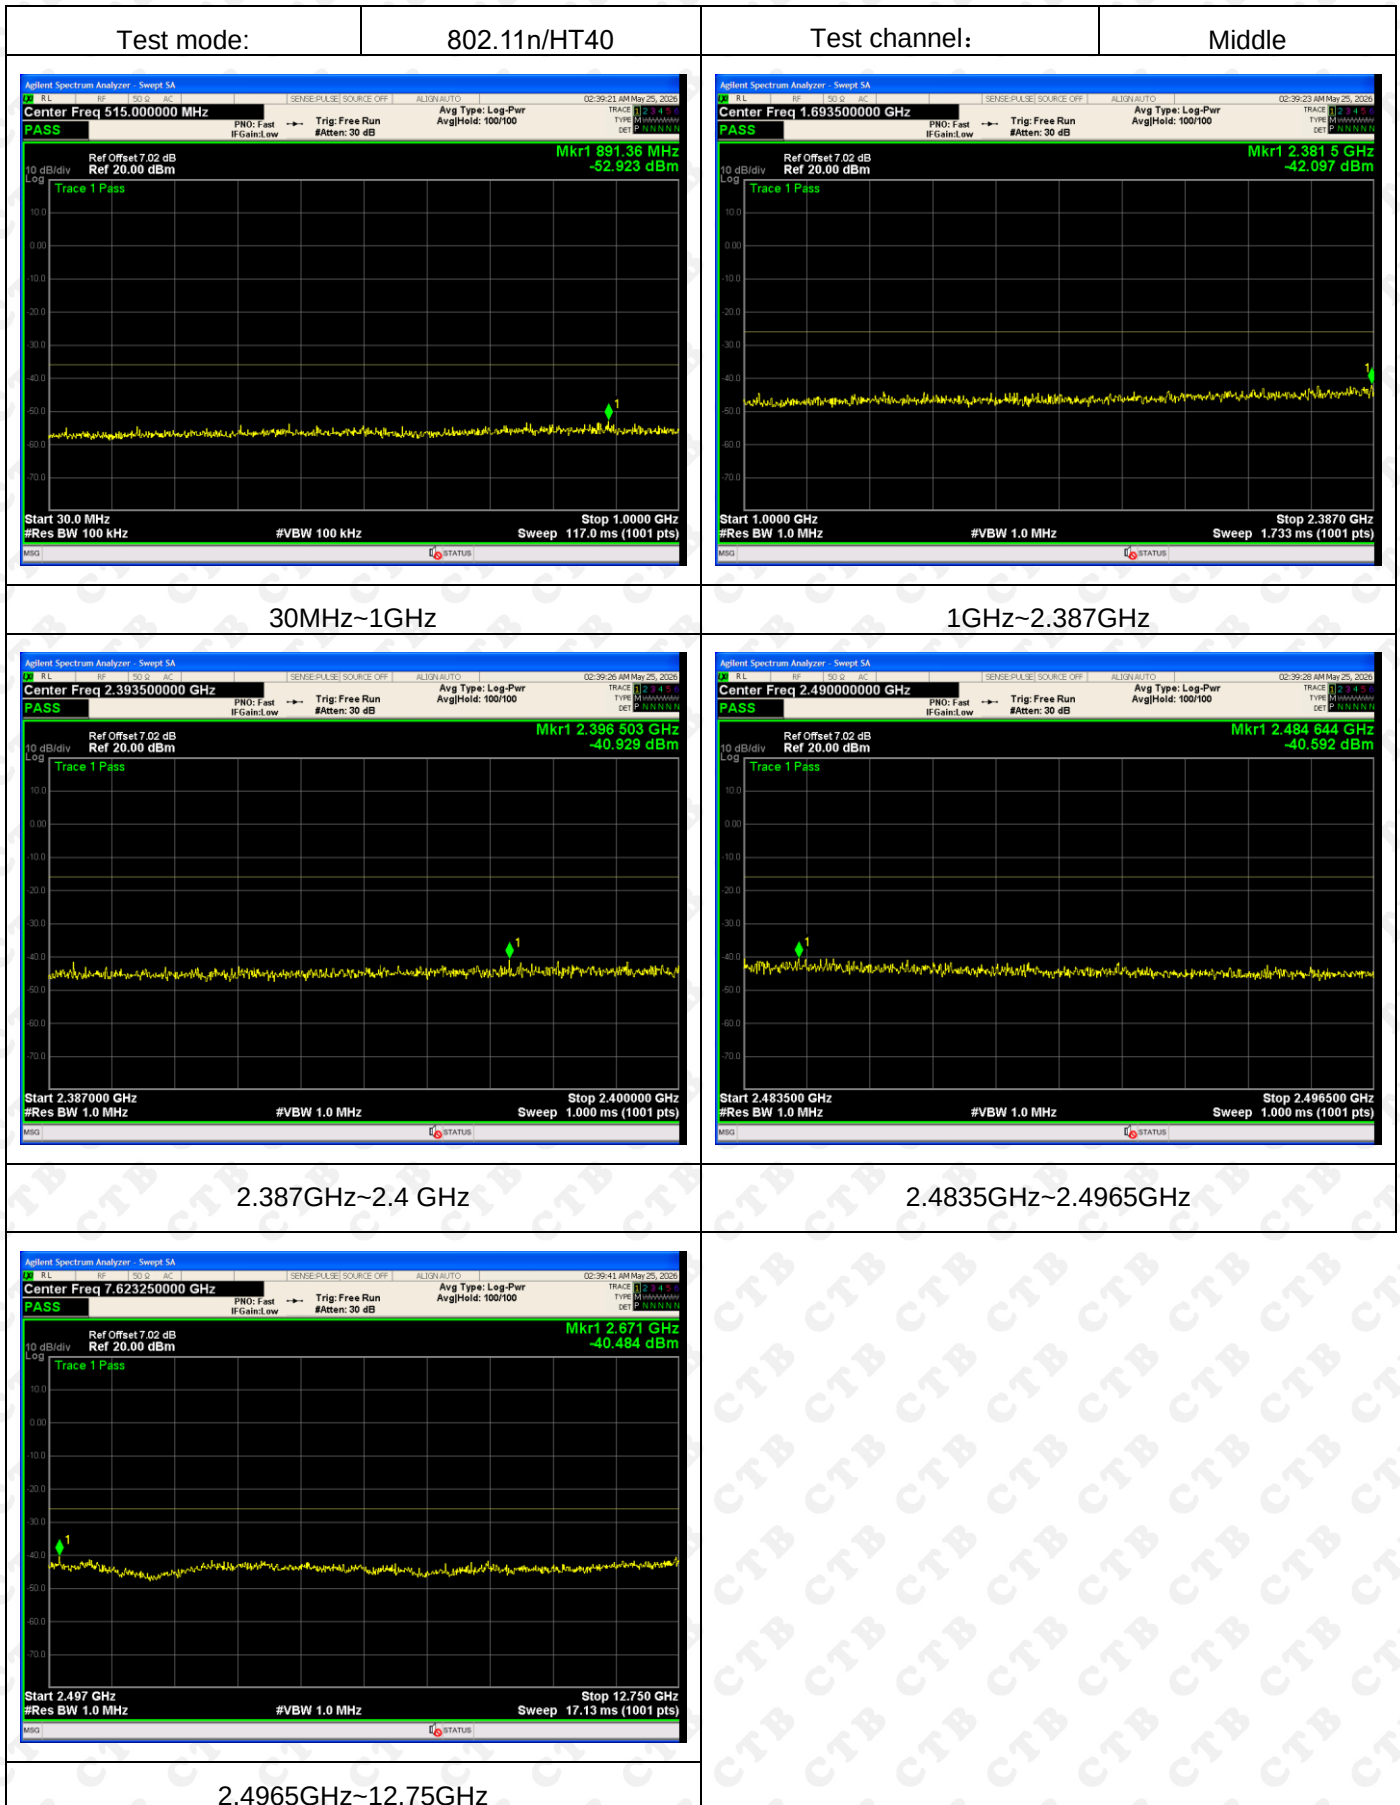


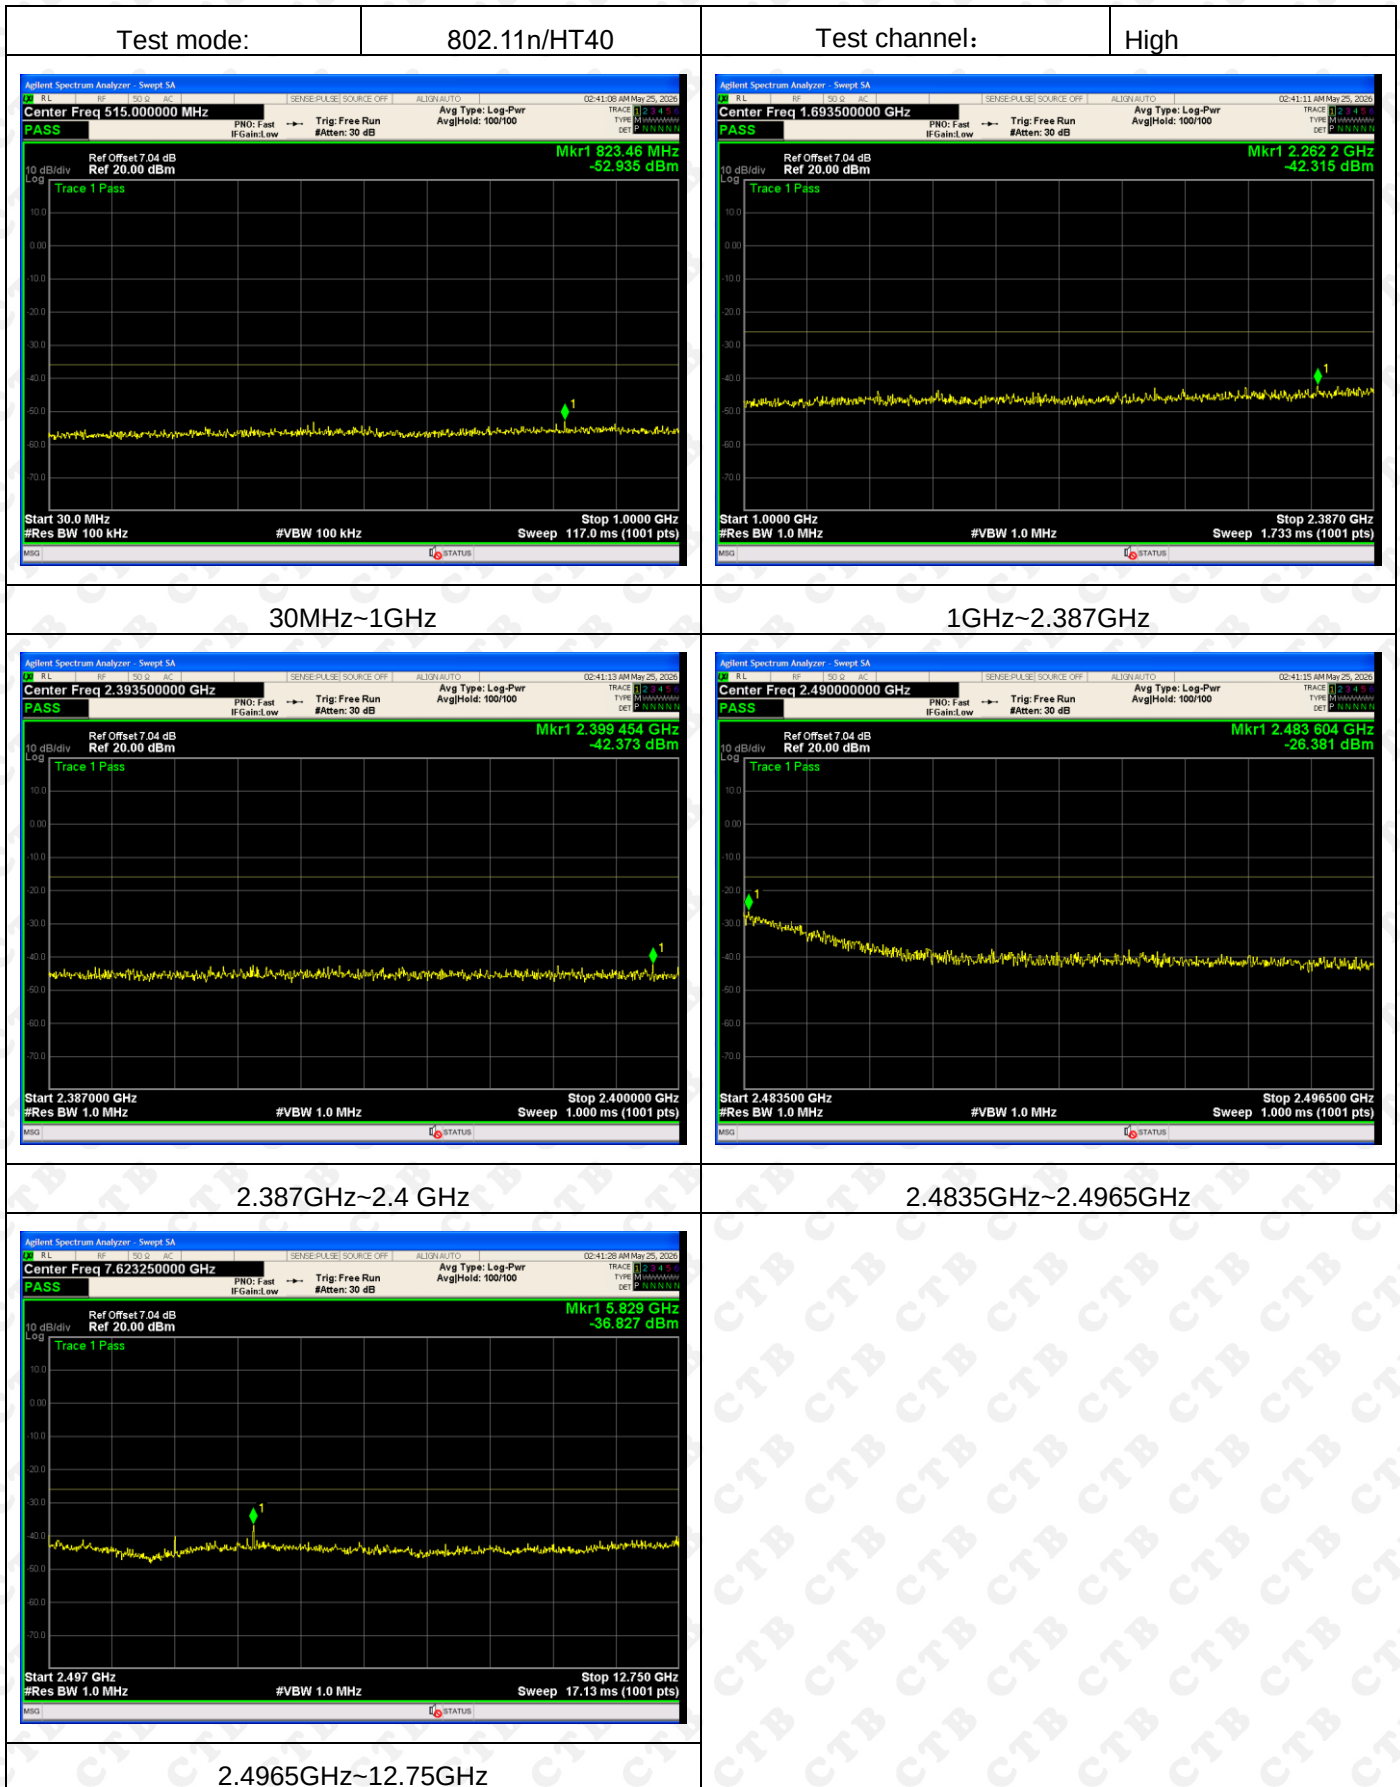

ANT 2:

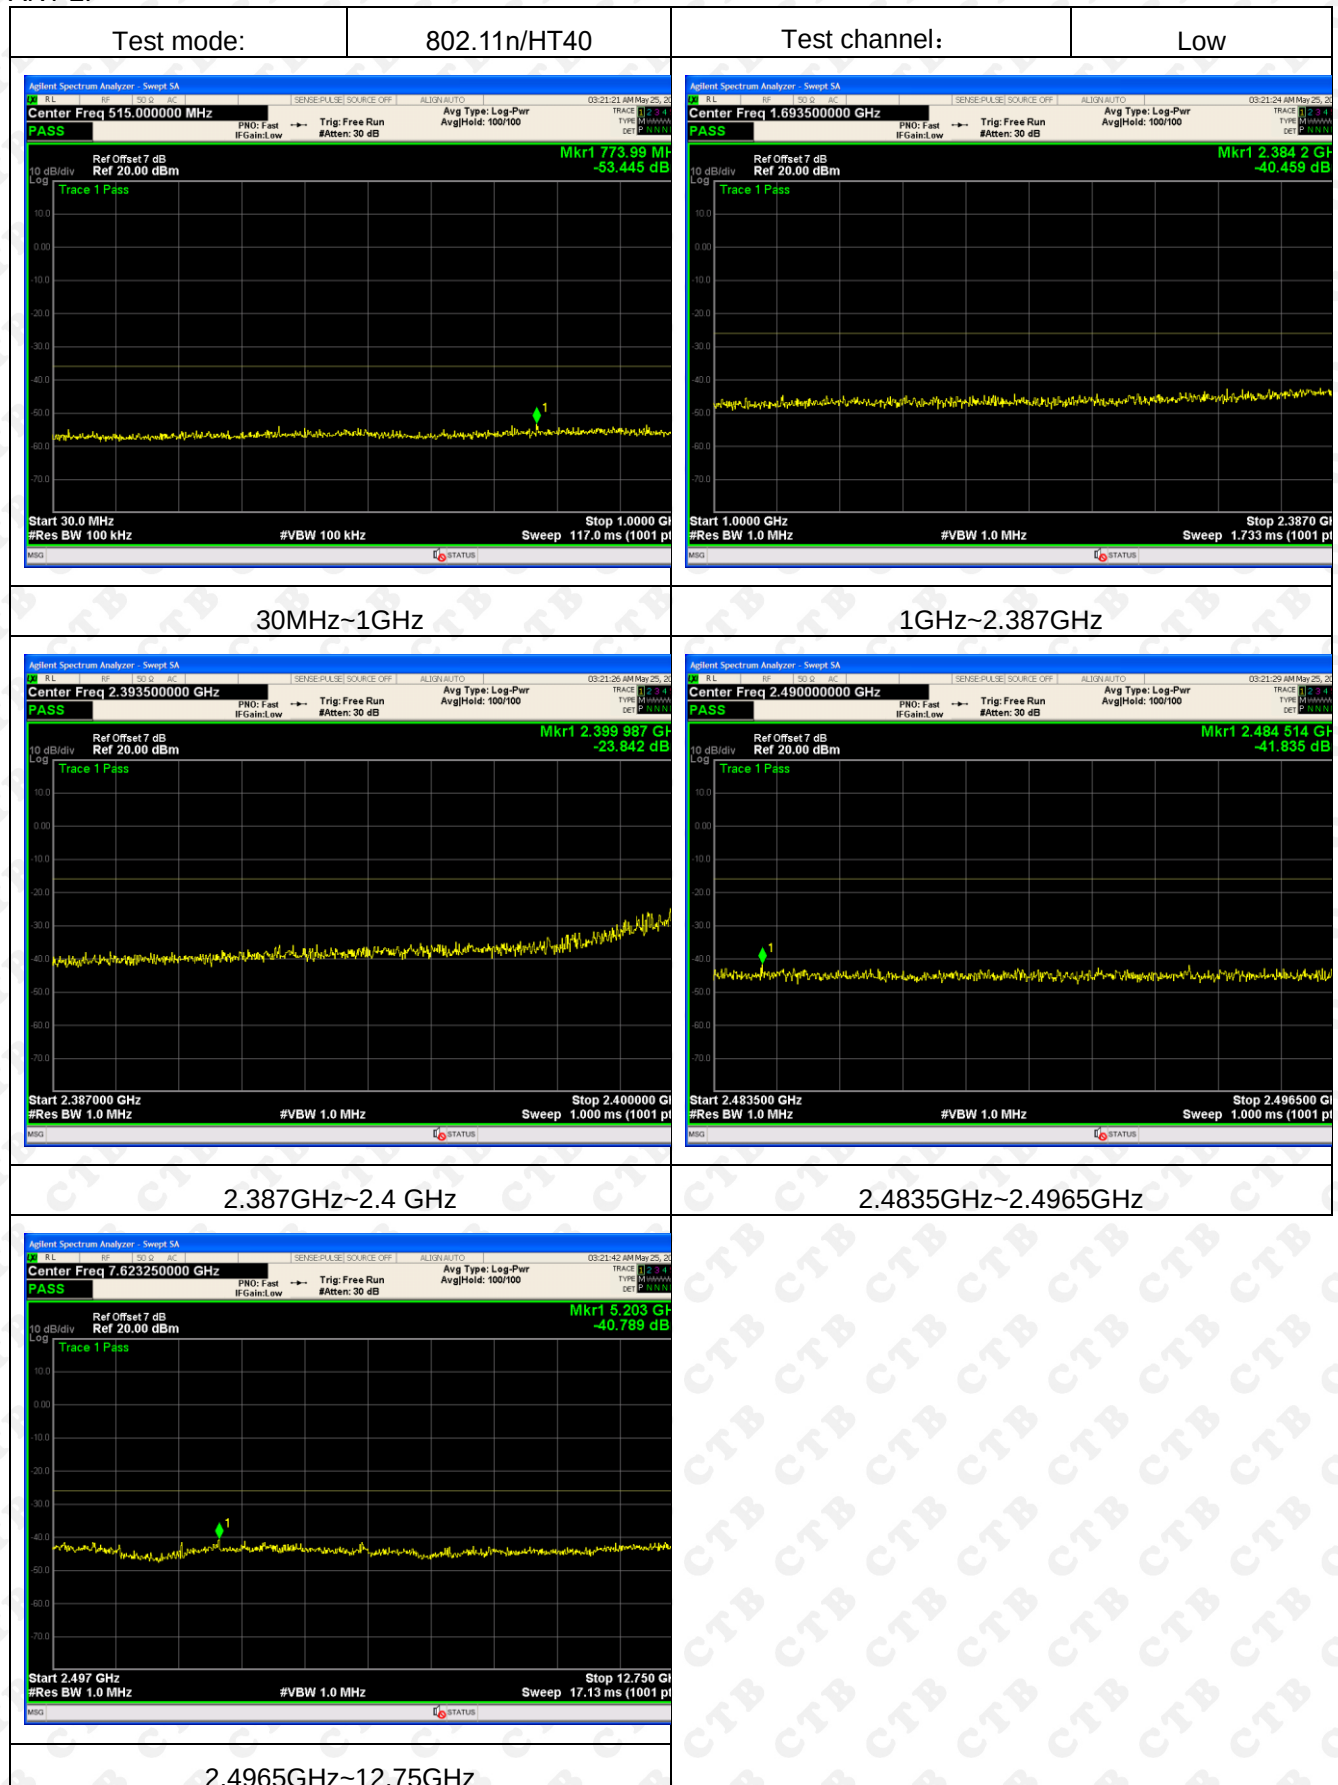

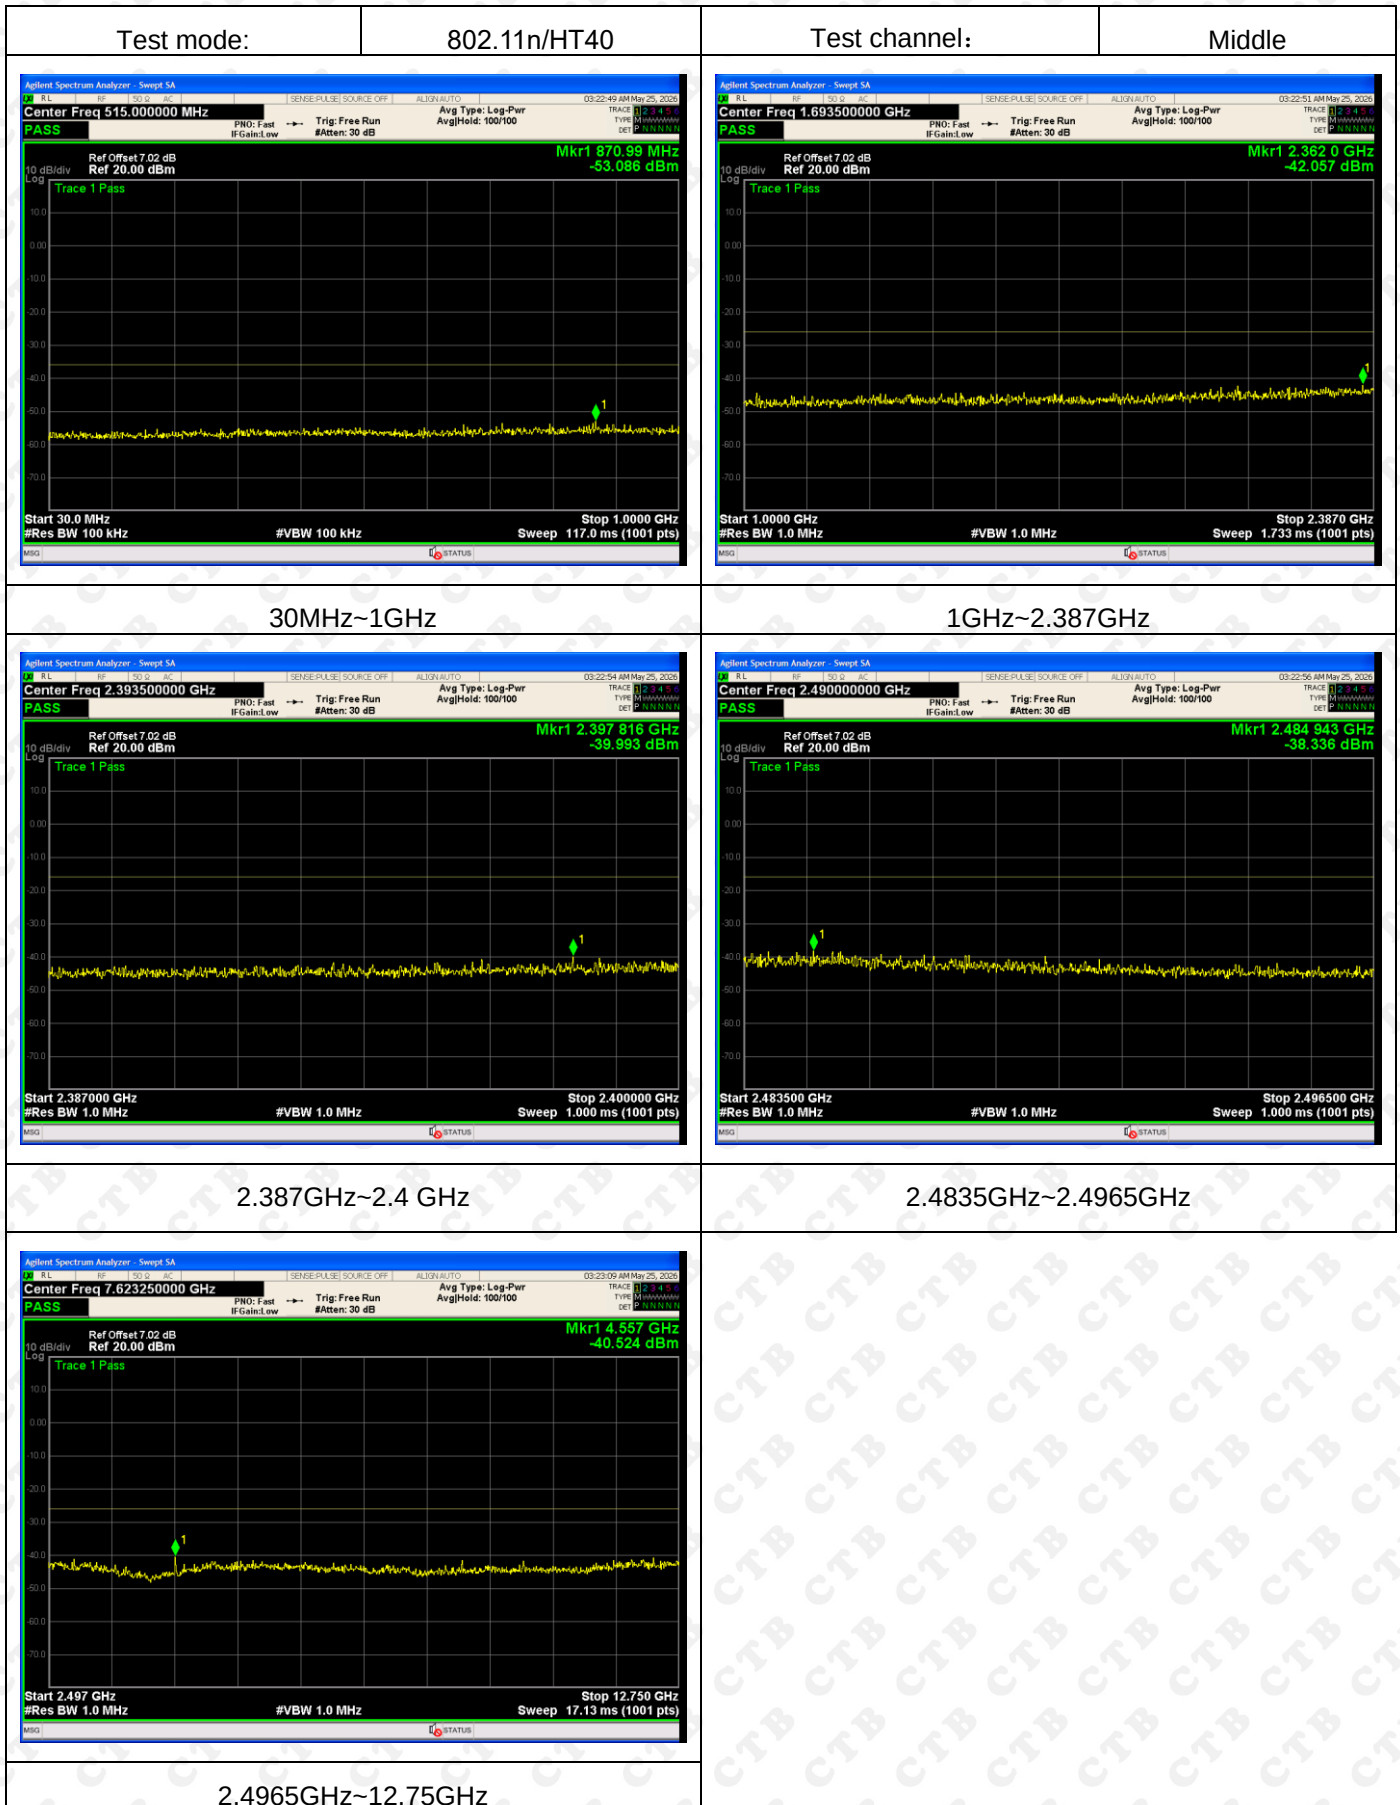

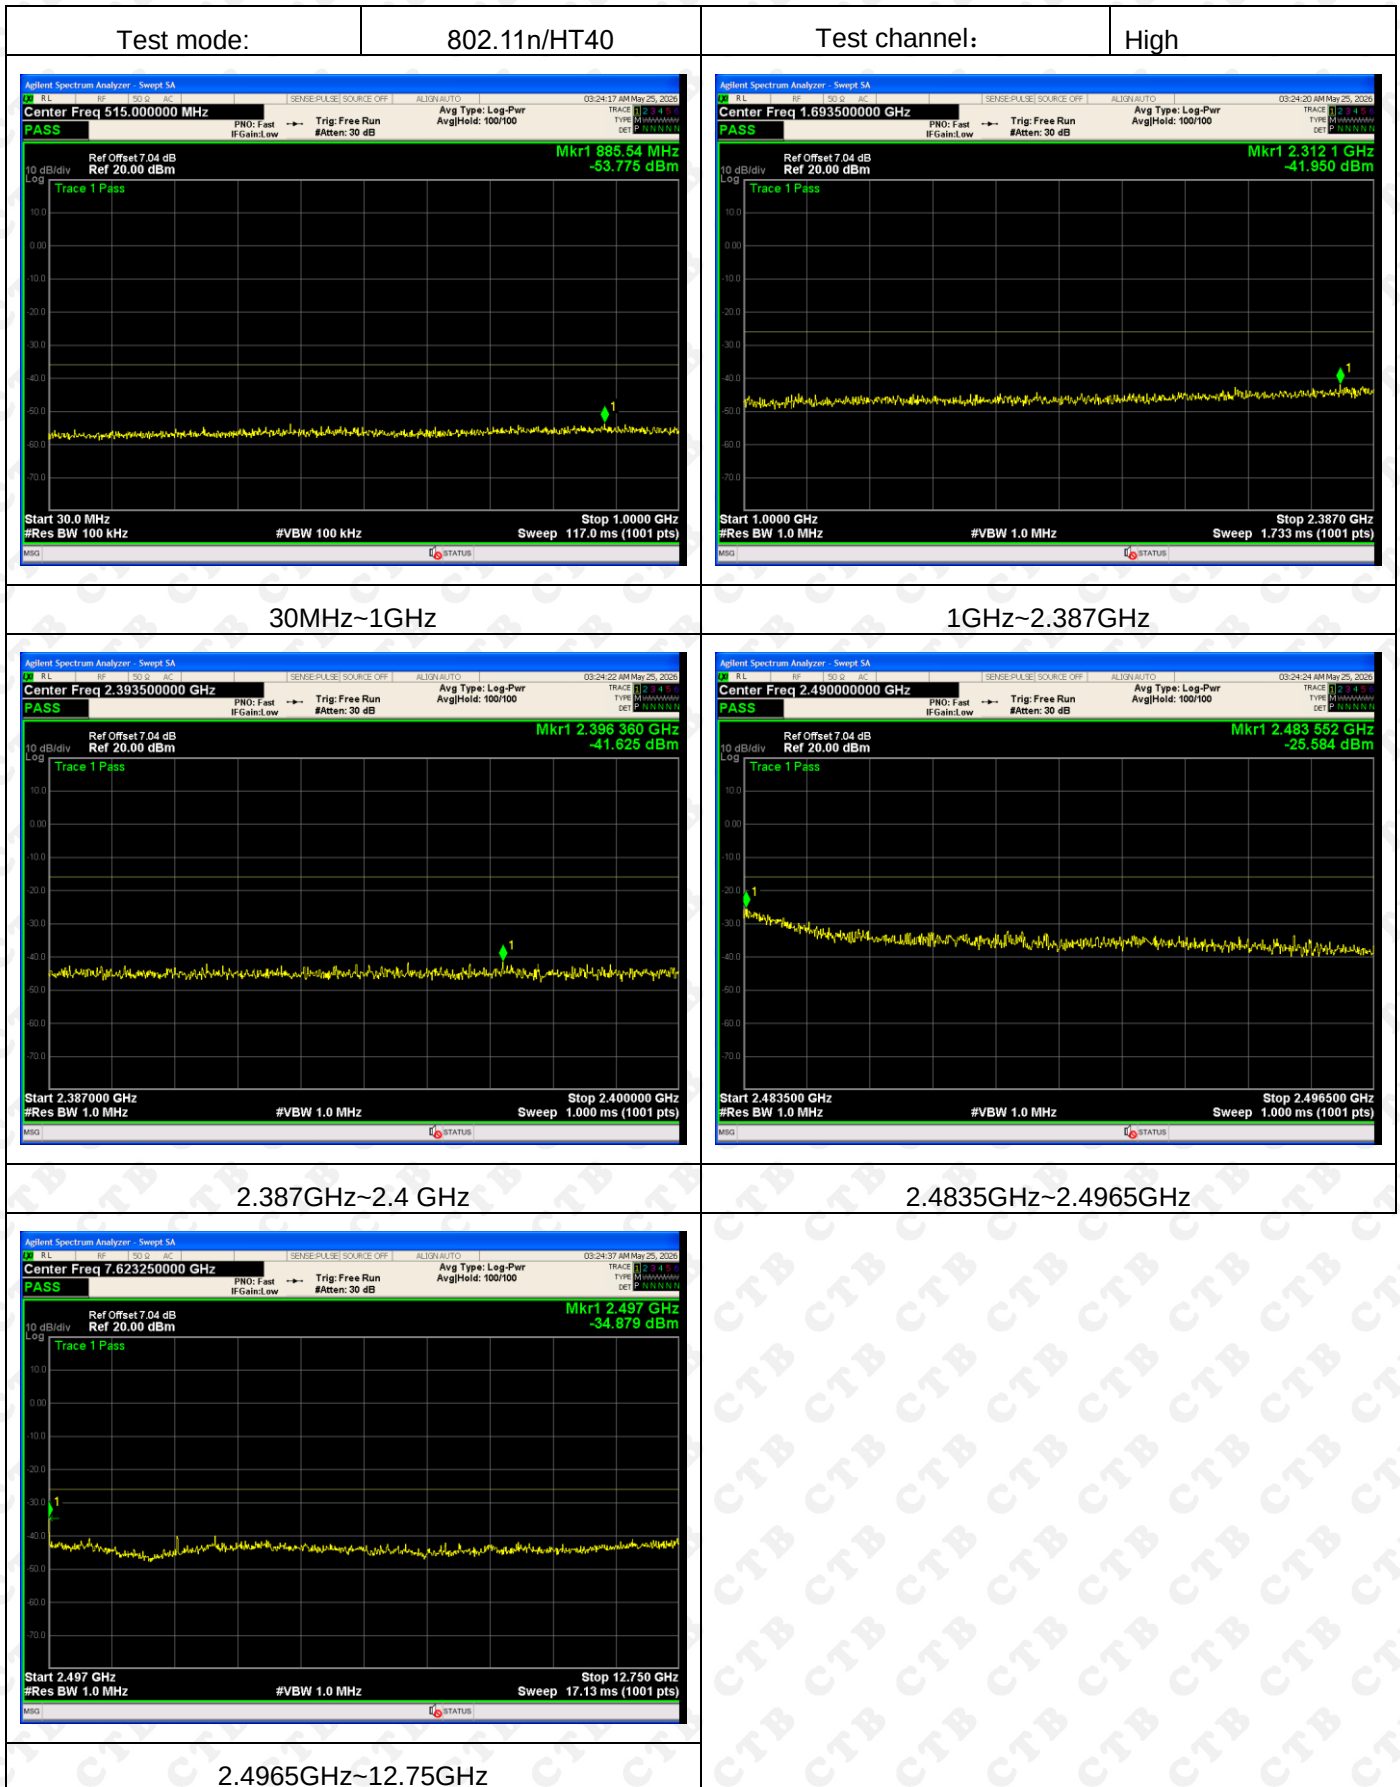

8 UNWANTED EMISSION INTENSITY MEASUREMENT

8.1 LIMIT

Item	Limits
RX Spurious Emission	$\leq 4\text{nW}$ ($f < 1\text{GHz}$)
	$\leq 20\text{nW}$ ($1\text{GHz} \leq f$)

8.2 MEASURING INSTRUMENTS AND SETTING

The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
VB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 TEST PROCEDURE



1. EUT have the continuous reception mode and fixed only one channelize.
2. Setting of SA is following as
RB / VB: 100 kHz (below 1GHz emissions) / 1 MHz (above 1GHz emissions) /
AT: 10dB / Ref: 0dBm / Sweep time: Auto / Sweep Mode: Continuous sweep /
Detect mode: Positive peak / Trace mode: Max hold
3. SA set RB: 100kHz and VB: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW
4. SA set RB: 1MHz and VB: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW
5. If power level of lower emissions are more than 1/10 of limit (.0.4nW for $f < 1\text{GHz}$, 2nW for $f \geq 1\text{GHz}$), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.

8.4 TEST RESULT

Temperature:	23°C	Relative Humidity:	54%
Test Voltage:	Normal Voltage	Pressure:	101kPa


ANT 1:

Test mode	Test freq. range	Emission Frequency (MHz)	Test result dBm	Test result nW	Limit nW	Result
b mode	30MHz≤f≤1000MHz	759.44	-73.85	0.041	4	PASS
	1000MHz < f≤12750MHz	5829.25	-56.24	2.377	20	PASS

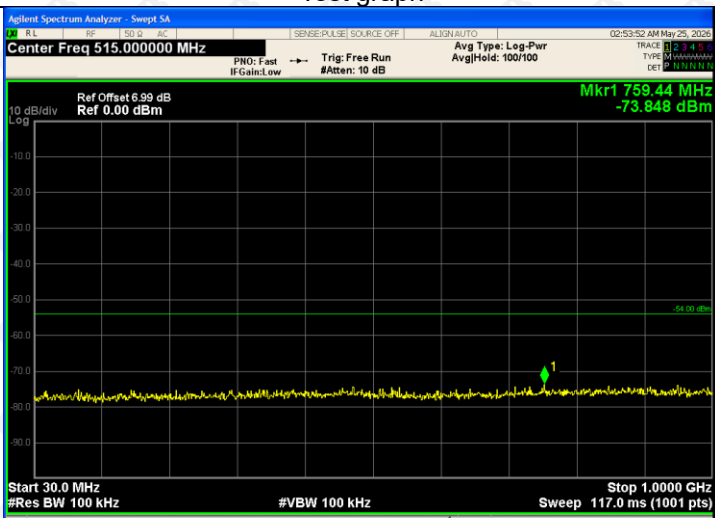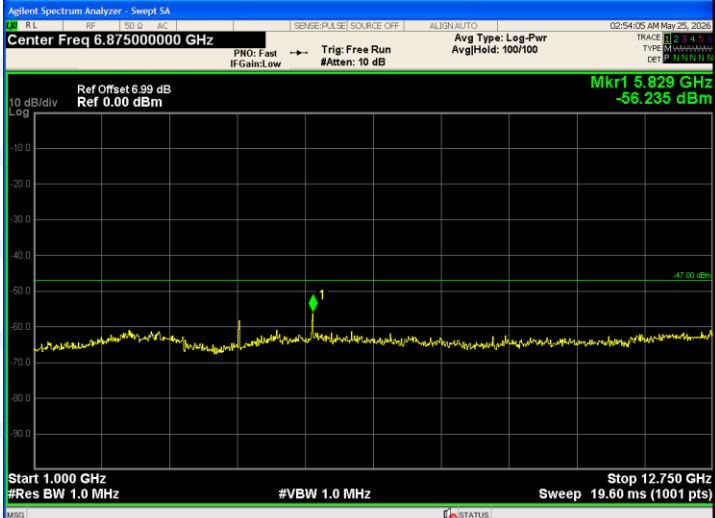Test freq.	Test graph
30 MHz ≤ f < 1000 MHz	 Agilent Spectrum Analyzer - Swept SA Center Freq 515.000000 MHz Ref Offset 6.99 dB Ref 0.00 dBm Mkr1 759.44 MHz -73.848 dBm Start 30.0 MHz #Res BW 100 kHz #VBW 100 kHz Stop 1.0000 GHz Sweep 117.0 ms (1001 pts)
1000 MHz ≤ f < 12750 MHz	 Agilent Spectrum Analyzer - Swept SA Center Freq 6.875000000 GHz Ref Offset 6.99 dB Ref 0.00 dBm Mkr1 5.829 GHz -56.235 dBm Start 1.000 GHz #Res BW 1.0 MHz #VBW 1.0 MHz Stop 12.750 GHz Sweep 19.60 ms (1001 pts)



ANT 2:

Test mode	Test freq. range	Emission Frequency (MHz)	Test result dBm	Test result nW	Limit nW	Result
b mode	30MHz≤f≤1000MHz	695.42	-73.62	0.043	4	PASS
	1000MHz < f≤12750MHz	4607.25	-58.17	1.524	20	PASS

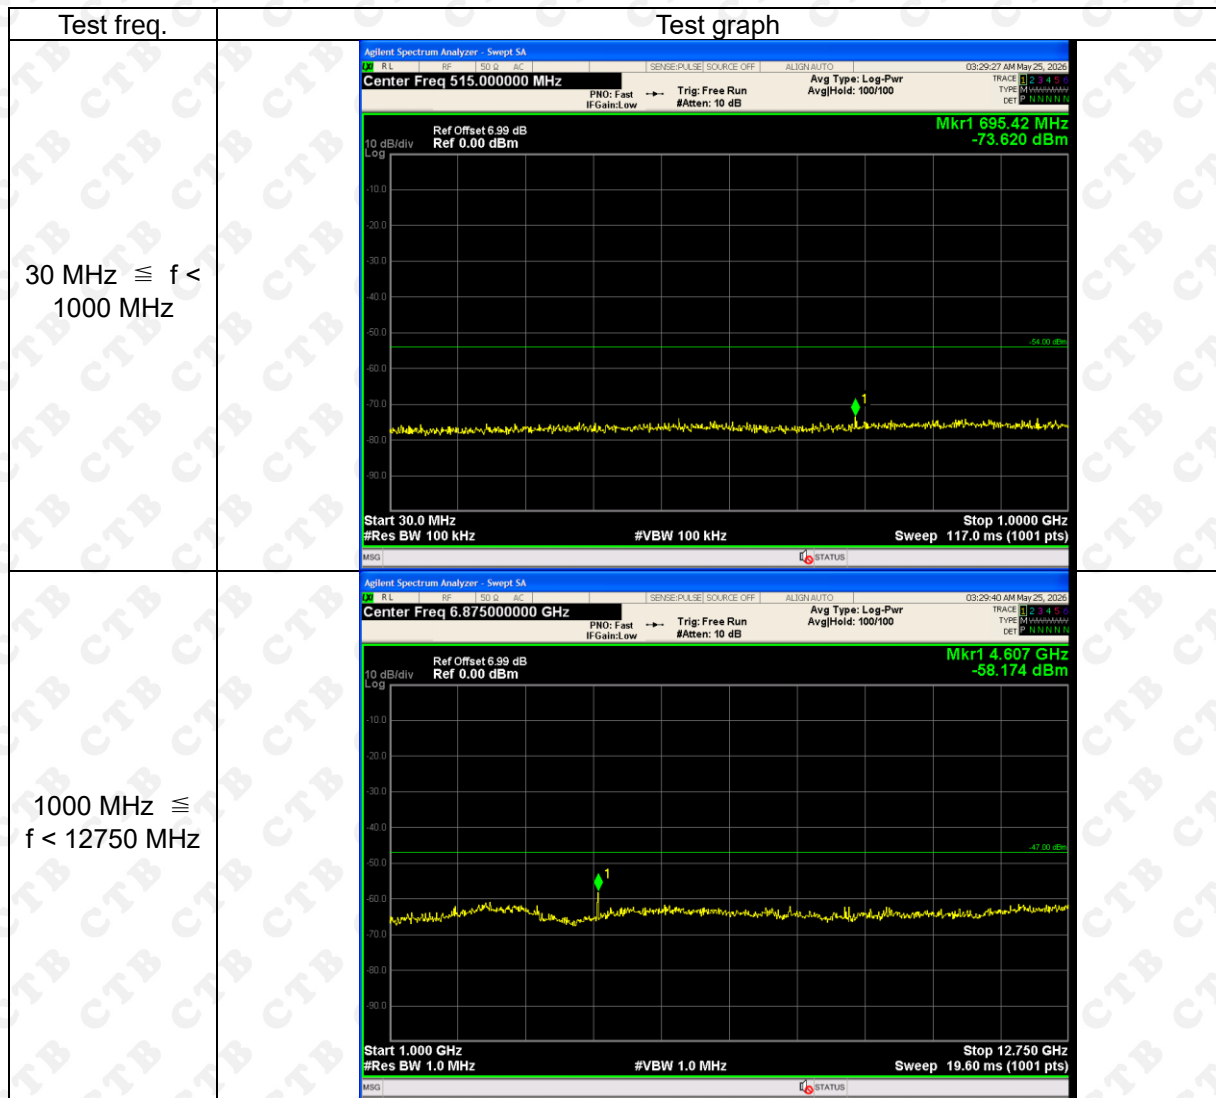


ANT 1:

Test mode	Test freq. range	Emission Frequency (MHz)	Test result dBm	Test result nW	Limit nW	Result
g mode	30MHz≤f≤1000MHz	755.56	-73.28	0.047	4	PASS
	1000MHz < f≤12750MHz	4560.25	-58.08	1.556	20	PASS

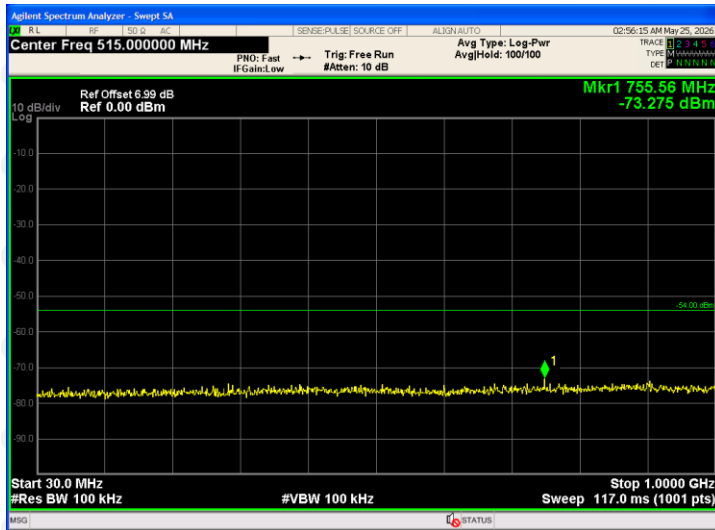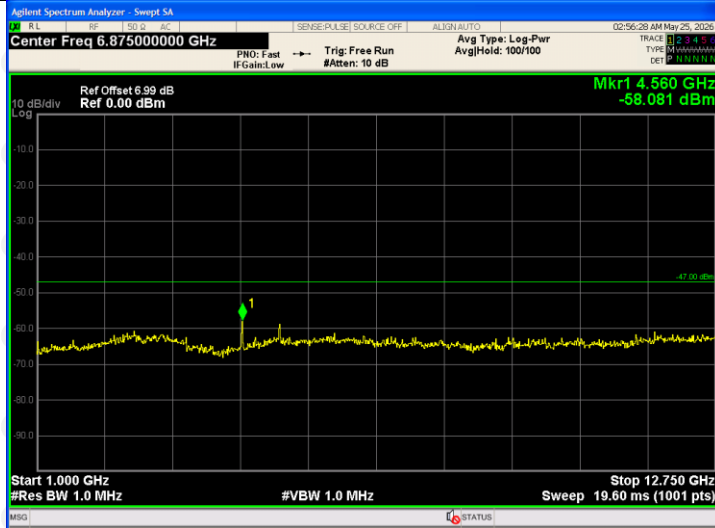Test freq.	Test graph
30 MHz ≤ f < 1000 MHz	
1000 MHz ≤ f < 12750 MHz	


ANT 2:

Test mode	Test freq. range	Emission Frequency (MHz)	Test result dBm	Test result nW	Limit nW	Result
g mode	30MHz≤f≤1000MHz	927.25	-73.09	0.049	4	PASS
	1000MHz < f≤12750MHz	5136	-55.03	3.141	20	PASS

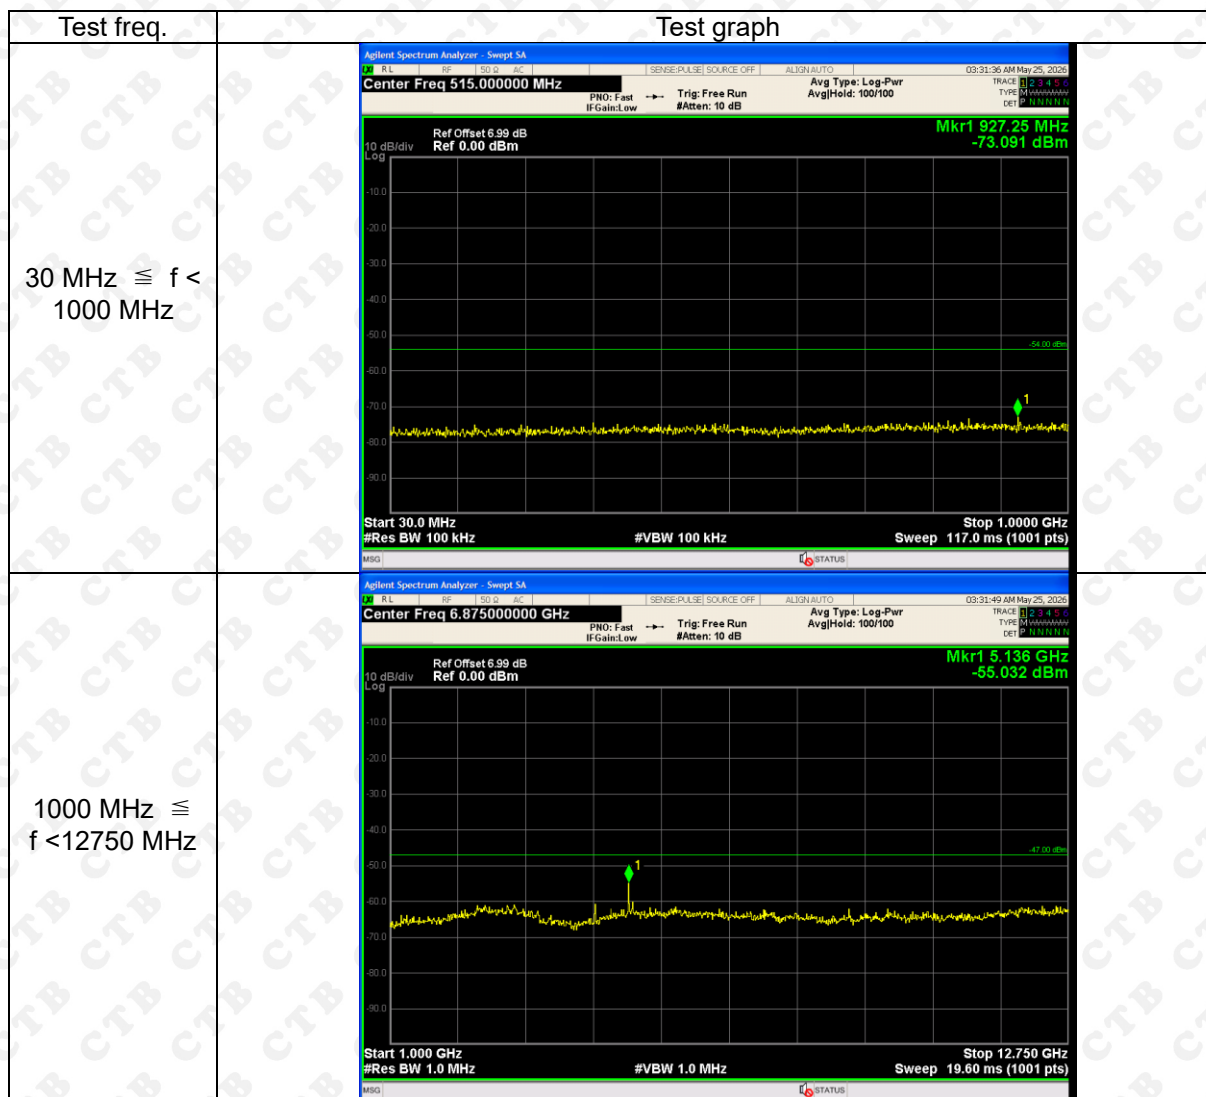


ANT 1

Test mode	Test freq. range	Emission Frequency (MHz)	Test result dBm	Test result nW	Limit nW	Result
N20 mode	30MHz≤f≤1000MHz	895.24	-73.06	0.049	4	PASS
	1000MHz < f≤12750MHz	5206.5	-57.25	1.884	20	PASS

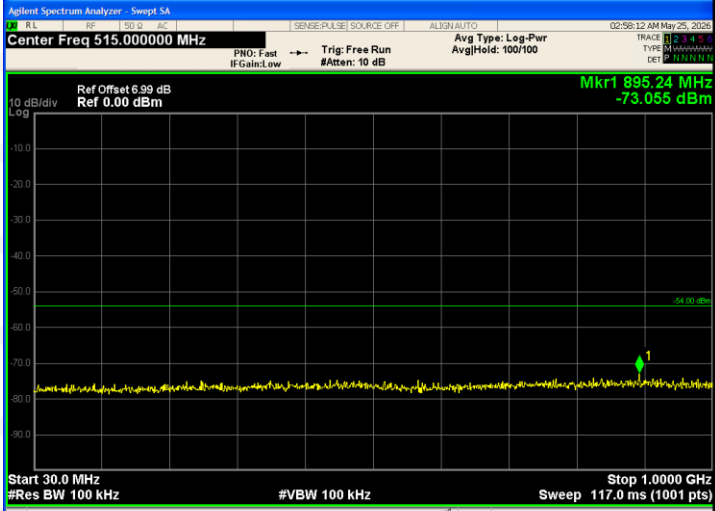Test freq.	Test graph
30 MHz ≤ f < 1000 MHz	
1000 MHz ≤ f < 12750 MHz	


ANT 2

Test mode	Test freq. range	Emission Frequency (MHz)	Test result dBm	Test result nW	Limit nW	Result
N20 mode	30MHz≤f≤1000MHz	777.87	-73.5	0.045	4	PASS
	1000MHz < f≤12750MHz	5194.75	-59.48	1.127	20	PASS

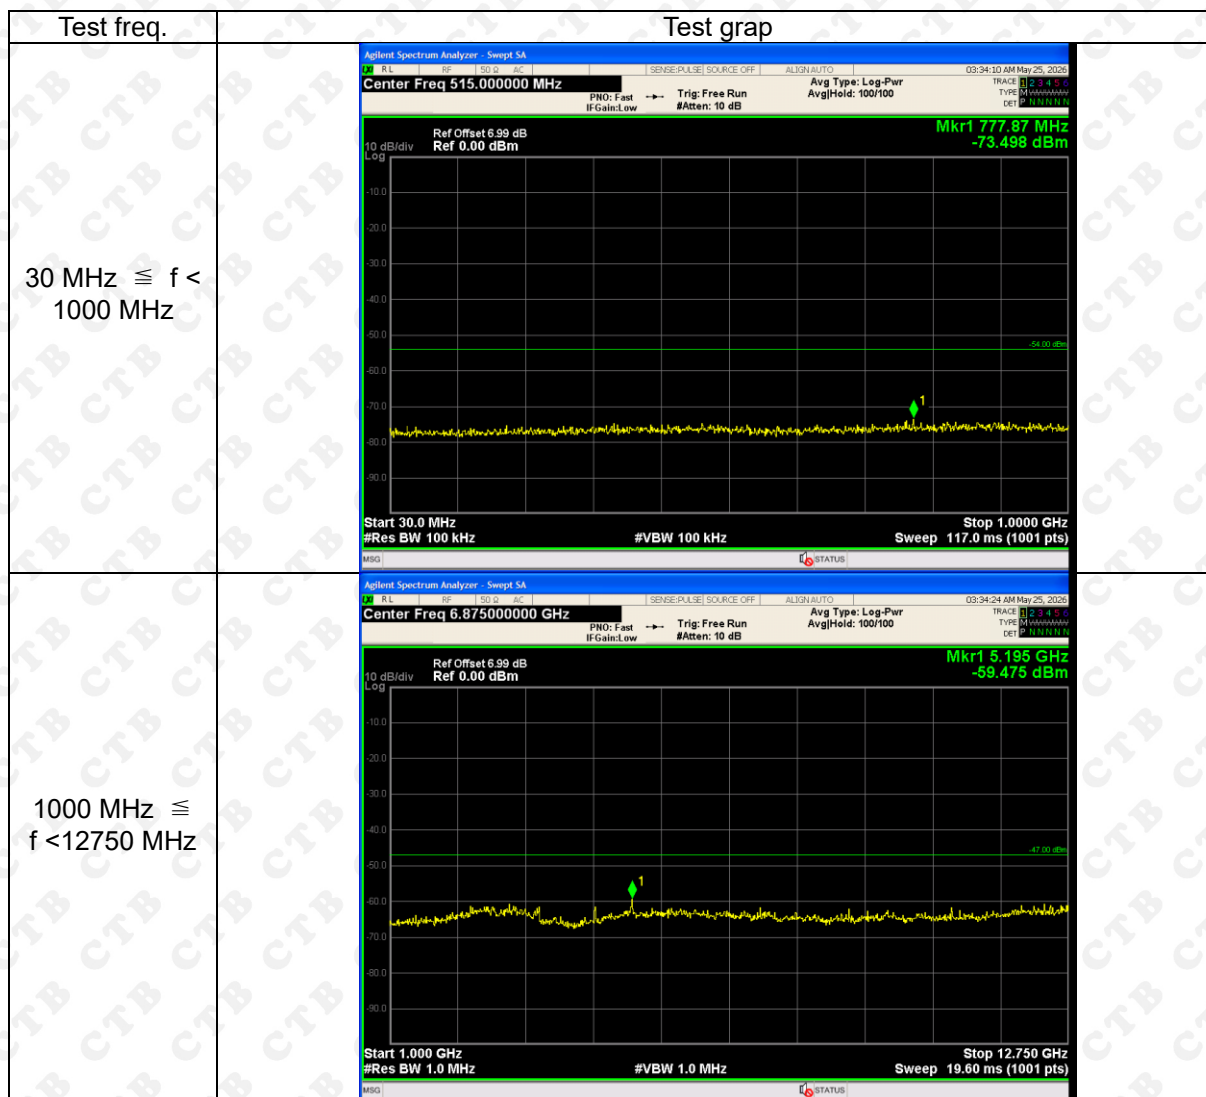


ANT 1:

Test mode	Test freq. range	Emission Frequency (MHz)	Test result dBm	Test result nW	Limit nW	Result
N40 mode	30MHz≤f≤1000MHz	919.49	-73.78	0.042	4	PASS
	1000MHz < f≤12750MHz	5194.75	-58.47	1.422	20	PASS

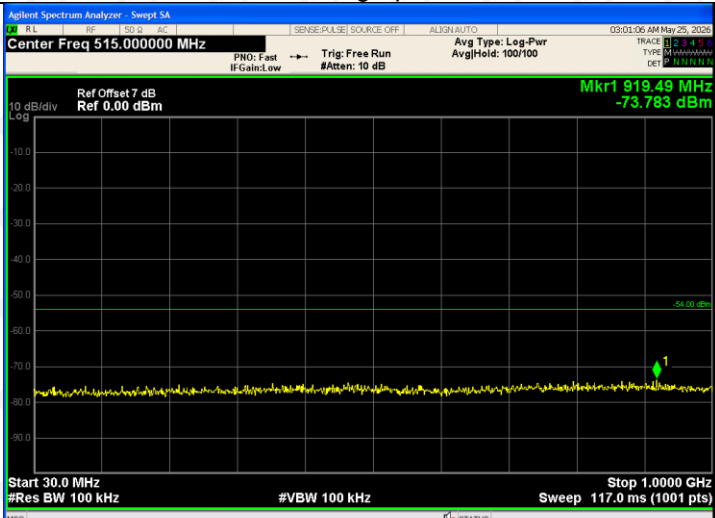Test freq.	Test graph
30 MHz ≤ f < 1000 MHz	
1000 MHz ≤ f < 12750 MHz	

ANT 2:

Test mode	Test freq. range	Emission Frequency (MHz)	Test result dBm	Test result nW	Limit nW	Result
N40 mode	30MHz≤f≤1000MHz	755.56	-73.39	0.046	4	PASS
	1000MHz < f≤12750MHz	5206.5	-59.53	1.114	20	PASS

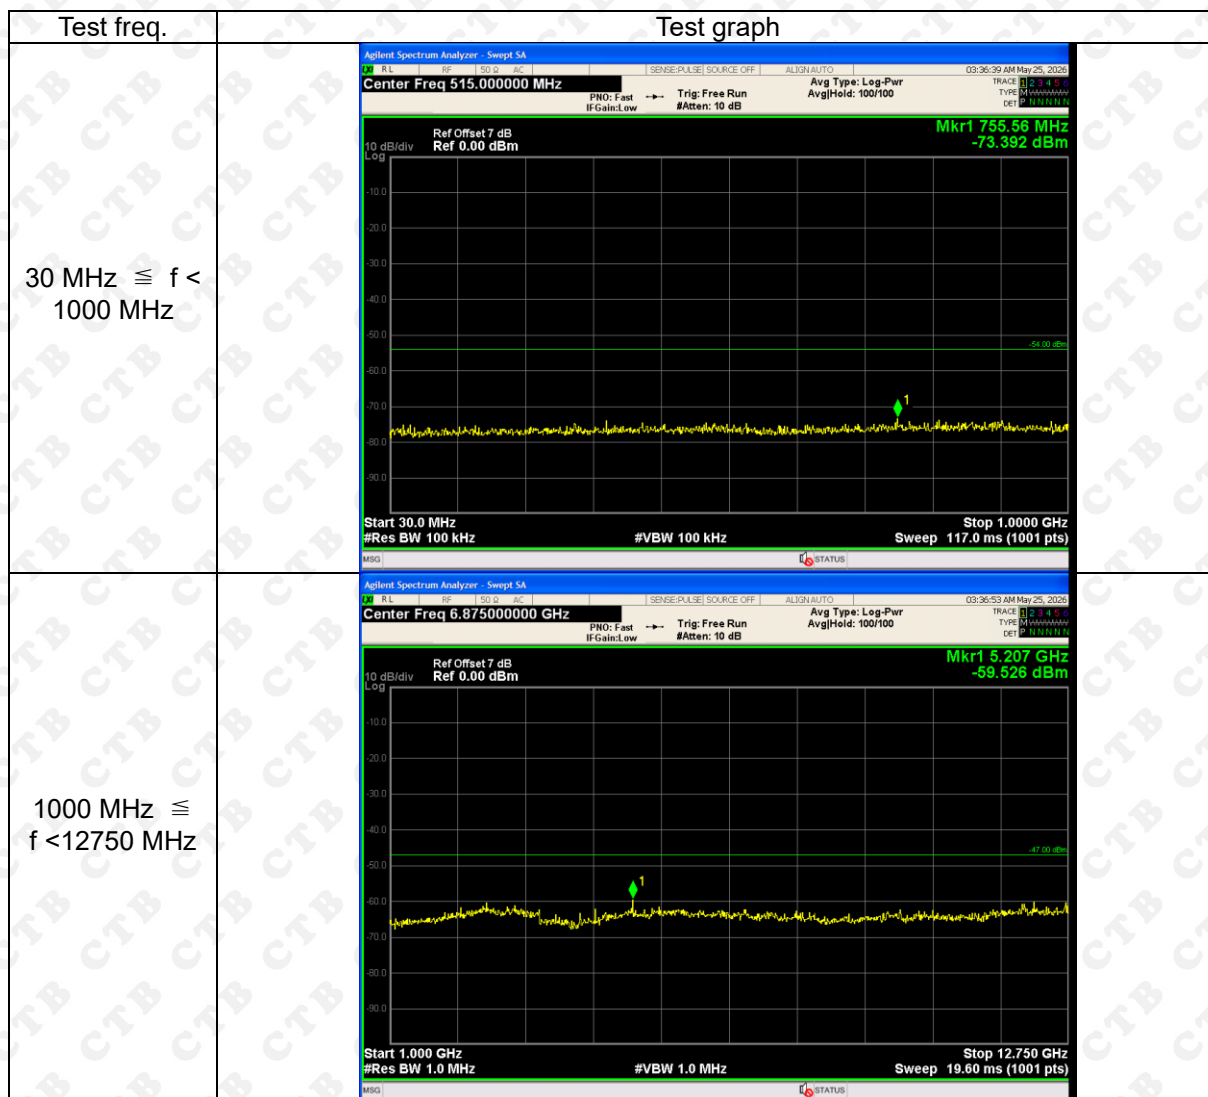

9 TRANSMISSION ANTENNA GAIN (EIRP ANTENNA POWER) MEASUREMENT

9.1 LIMIT

Item	Limits
EIRP Power Density	$\leq 6.91\text{dBm/MHz}$ (FH form 2427 - 2470.75 MHz) $\leq 12.14\text{dBm/MHz}$ (OFDM,DS from 2400~2483.5MHz) $\leq 12.14\text{dBm}$ (Other from 2400~2483.5MHz)
Note: This test item is not applied for radio equipment with equivalent isotropic radiation power lower than 12.14dBm/MHz, but Antenna Power(Conducted) limit is 10 mW/MHz (10 dBm/MHz), So the test item will be not applied to the transmission antenna which has a gain of 2.14dBi or less	

9.2 MEASURING INSTRUMENTS AND SETTING

The following table is the setting of Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
RB/VB	1MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 TEST PROCEDURE


1. Set EUT and measuring antenna at the same height and roughly facing each other.
2. Move the measuring antenna height up and down within $\pm 50\text{cm}$ of EUT height and swing it to find the maximum output of the measuring antenna. The output level at the spectrum analyzer is read as "E".
3. Remove the EUT from the turn table and put the replacing antenna facing to measuring antenna at same height. Set the standard signal generator (SSG) at same frequency and transmit on then receive the signal
4. Swing the replacing antenna give a maximum receiving level.
5. Move the measuring antenna height up and down within $\pm 50\text{cm}$ of replacing antenna height and swing it to find the maximum receiving level.
6. Set SSG output power at P_t to give the equivalent output level of "E" or calculate P_t with SSG output which gives the nearest of "E" and difference ($\pm 1\text{dB}$). Record the P_t .
7. Calculate EIRP by the formula below $\text{EIRP} = G_t - L + P_t$. G_t : gain of replacing antenna (dBi)
 L : feeder loss between SSG and replacing antenna P_t : Output power of the SSG
8. If the antenna for the EUT has circular polarization, sum of V-field and H-field will be result if measuring antenna is linear polarization.

9.4 TEST SETUP LAYOUT

For EUT radiation measurement

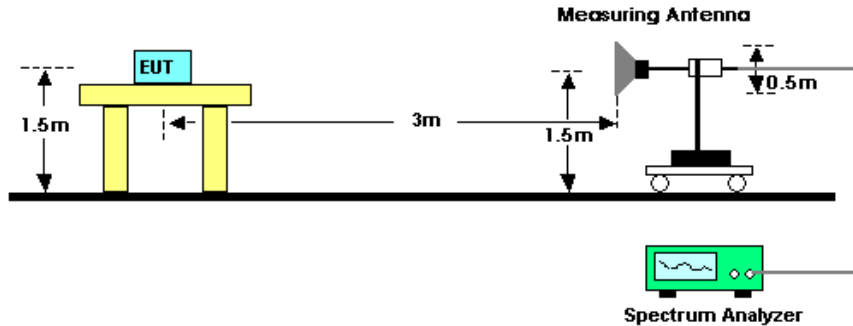

For standard antenna measurement

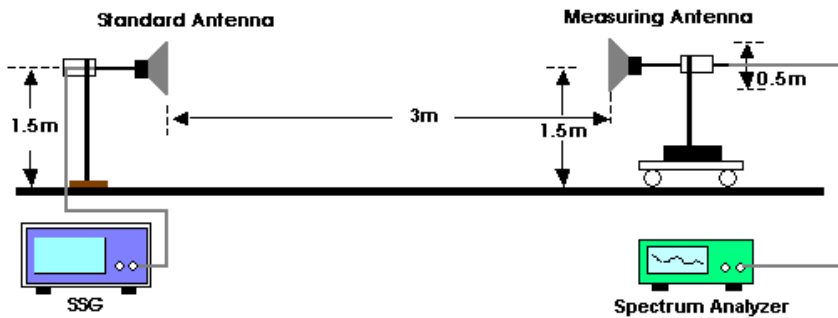

TEST DEVIATION

There is no deviation with the original standard.

9.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULT

ANT 1:

Test voltage	Test modulation	Output power (dBm/MHz)	Gain (dBi)	EIRP (dBm/MHz)	Result
Normal Voltage	802.11b	3.342	4.36	7.702	Pass
Normal Voltage	802.11g	3.686	4.36	8.046	Pass
Normal Voltage	802.11n(HT20)	2.477	4.36	6.837	Pass
Normal Voltage	802.11n(HT40)	2.08	4.36	6.44	Pass

ANT 2

Test voltage	Test modulation	Output power (dBm/MHz)	Gain (dBi)	EIRP (dBm/MHz)	Result
Normal Voltage	802.11b	2.525	2.06	4.585	Pass
Normal Voltage	802.11g	2.641	2.06	4.701	Pass
Normal Voltage	802.11n(HT20)	2.918	2.06	4.978	Pass
Normal Voltage	802.11n(HT40)	2.189	2.06	4.249	Pass

10TRANSMISSION RADIATION ANGLE WIDTH (3DB BEAMWIDTH) MEASUREMENT

10.1 LIMIT

Item	Limits
3dB antenna beam width	$360/A$ (If $A < 1$; then $A=1$) $A = \{\text{EIRP Power [mW]} / 16.36 \text{ for DS, OFDM}\}$ or $A = \{\text{EIRP Power [mW]} / 4.9 \text{ for FH}\}$
Note: This test item is not applied for radio equipment with equivalent isotropic radiation power lower than 12.14dBm/MHz, but Antenna Power(Conducted) limit is 10 mW/MHz (10 dBm/MHz), So the test item will not be applied to the transmission antenna which has a gain of 2.14dBi or less	

10.2 MEASURING INSTRUMENTS AND SETTING


The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0MHz
RB	1MHz
VB	1KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

10.3 TEST PROCEDURE

1. Set EUT and measuring antenna at the same height and roughly facing each other.
2. Set spectrum analyzer with condition in section 4.7.2 and tune reference level to observe receiving signal position.
3. Rotate directions of the EUT horizontally and vertically to find the maximum receiving power.
4. Move the measuring antenna height up and down within $\pm 50\text{cm}$ of EUT height and swing it to find the maximum output of measuring antenna. The output level at the spectrum analyzer is read as "E"
5. Calculate permitted radiation angle in horizontal and vertical using EIRP measured in another test method.
6. Calculate 3dB antenna beam width by the formula below $360/A$ (If $A < 1$; then $A=1$). $A = \{\text{EIRP Power [mW]} / 16.36 \text{ for DS, OFDM}\}$ or $A = \{\text{EIRP Power [mW]} / 4.9 \text{ for FH}\}$

10.4 TEST SETUP LAYOUT

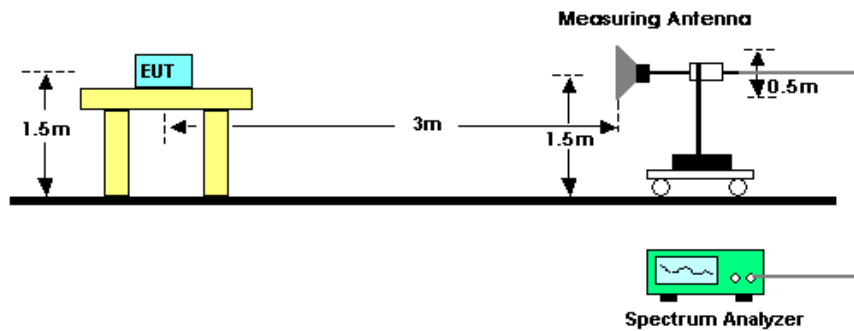

TEST DEVIATION

There is no deviation with the original standard.

10.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

10.6 TEST RESULT

N/A

Note: This test item is not applied for radio equipment with equivalent isotropic radiation power lower than 12.14dBm/MHz

11 RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT

11.1 LIMIT

Item	Limits
Identification code	≥ 48 bits


11.2 MEASURING ID CODE SOFTWARE

Item	Limits
MAC IP List	MAC Scan

11.3 TEST PROCEDURE

1. In the case that the EUT has the function of automatically transmitting the identification code:
 - a. Transmit the predetermined identification codes form EUT.
 - b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification ocde:
 - a. Transmit the predetermined identification codes form the counterpart.
 - b. Check if communication is normal.
 - c. Transmit the signals other than predetermined ID codes form the counterpart.
 - d. check if the EUT stops the transmission, or if it displays that idnetification codes are different from the predetermined ones.

11.4 TEST SETUP LAYOUT

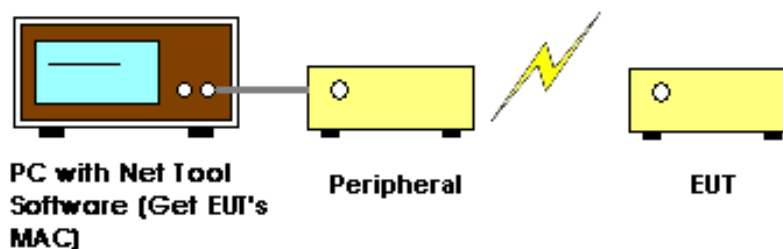

EST DEVIATION

There is no deviation with the original standard.

11.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

11.6 TEST RESULT

Temperature:	23°C	Relative Humidity:	54%
Pressure:	101kPa		
Test Result:	CONFORM		

MAC: 9CA525BA87F7

12 CARRIER SENSING FUNCTION


12.1 TEST REQUIREMENT

MIC Notice No.88 Appendix No.43

Article 2, Paragraph 1, Item 19 Rules Section 10

12.2 BLOCK DIAGRAM OF TEST SETUP

❖ Measurement System Diagram

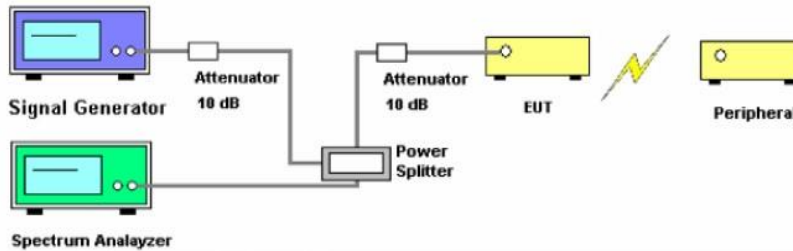

❖ Conditions of Application Equipment (EUT)

- The EUT state shall be "normal mode link with wireless router".

12.3 TEST PROCEDURE

- SG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SG and power level is (on $22.79 + G - 20 \cdot \log(f) \text{ dBm}$) (G is the antenna gain, f is the test frequency).
- Turn off the RF signal of the SG.
- EUT have transmitted the maximum modulation signal and fixed channelize.
- Setting of SA: RBW/VBW=1MHz/1MHz, span=50MHz, Sweep time=auto, Sweep mode=continuous, Detect mode=positive peak
- SG RF signal on.
- EUT shall be stop the transmitted any signal and SG RF signal off, the EUT will be continuous



12.4 TEST RESULT

Temperature:	23°C	Relative Humidity:	54%
Pressure:	101kPa		
Test Result:	CONFORM for 802.11n(HT40)		
Note: The EUT cannot transmit radio when the field strength at maximal gain direction of receiving antenna power is over 100mV/m; and The EUT start to transmit after carrier sensing.			

13 NUMBER OF CARRIERS

This device has more than 1 subcarrier in 1MHz, compliance with the requirement.

14EUT TEST PHOTO

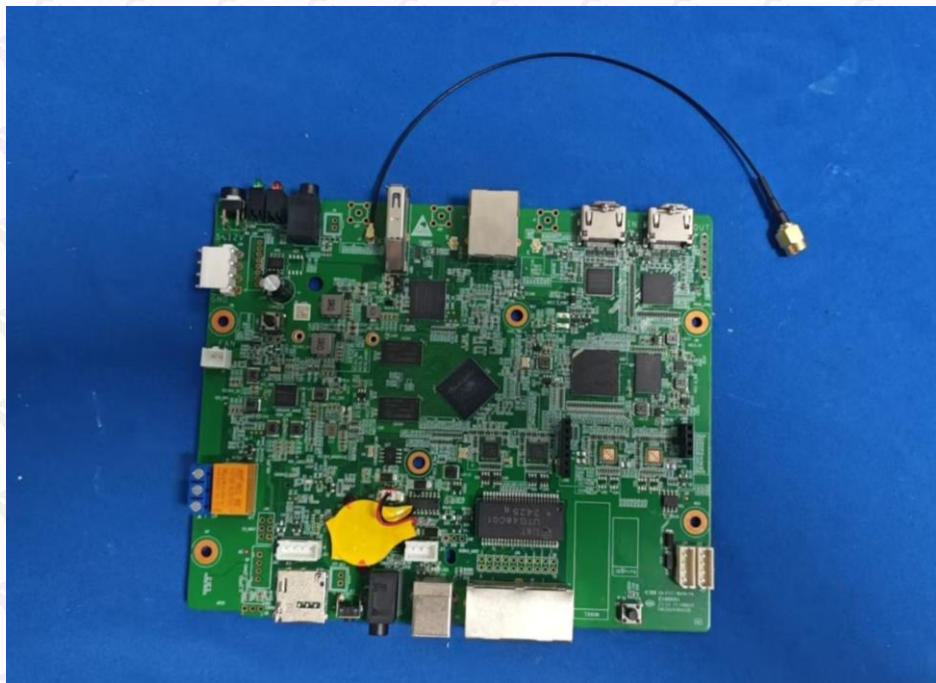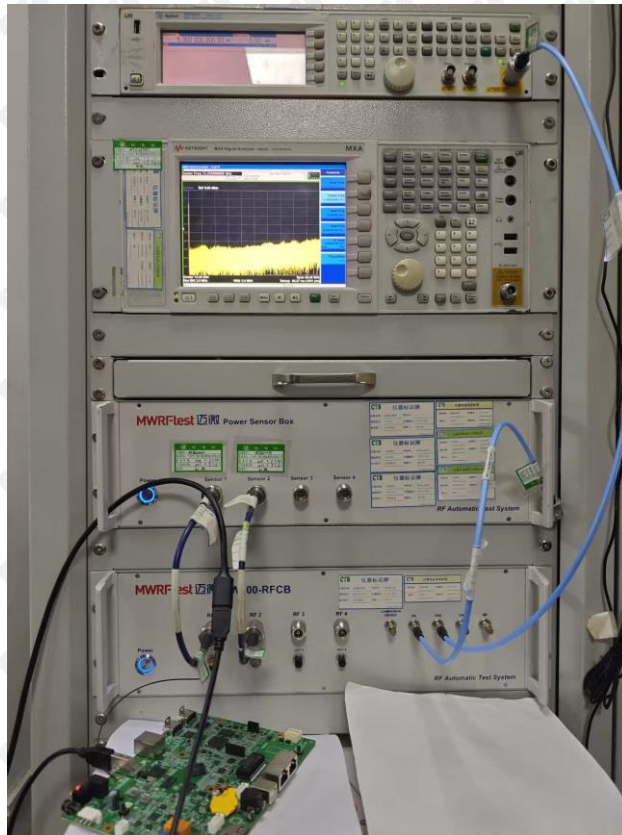

***** END OF REPORT *****