

附錄 一

受測裝置之測試結果

目錄	頁次
1. 場強輻射之量測.....	2
1.1. 30-1000MHz 頻率範圍，其他不必要發射量測.....	3
1.2. 1000MHz 以上頻率範圍，其他不必要發射量測.....	5
1.3. 禁用頻帶量測結果（其他不必要發射）.....	6
2. 20dB 頻寬之量測.....	10
2.1. 20dB 頻寬.....	10
2.2. 20dB 頻寬之量測圖.....	10
3. 載波頻率間隔之量測.....	11
3.1. 載波頻率間隔.....	11
3.2. 載波頻率間隔之量測圖.....	12
4. 跳頻頻率數目之量測.....	14
5. 佔用時間(停留時間)之量測.....	15
5.1. 佔用時間(停留時間).....	15
5.2. 佔用時間(停留時間)之量測圖.....	17
6. 峰值輸出功率之量測.....	23
6.1. 峰值輸出功率.....	23
6.2. 峰值輸出功率之量測圖.....	23
7. 頻帶邊緣之 RF 傳導發射之量測.....	24
8. 混附發射之 RF 傳導發射之量測.....	25

1. 場強輻射之量測

【經實驗室評估量測後，以最差之調變方式 8-DPSK 進行本章節之測試】

裝置有兩種電源供應模式分別為(1)電池(DC 7.4V)、(2)USB (DC 5V)，實驗室以單機(電池供電)及筆記型電腦 (USB, DC 5V)供電進行量試評估進行量測，最後選取最大場強值的擺設方式筆記型電腦供電方式以低、中、高頻率來進行量測，並將所有模式之掃頻圖檢附於附錄中；最後，選擇較差模式進行讀值之測量，所得讀值資料請見章節 1.1

~1.2：

模式	動作狀態	基本頻率	量測頻率範圍
1	充電	---	30-1000MHz
2	發射	2402MHz (CH0)	1000-3000MHz
3			3000-8000MHz
4			8000-18000MHz
5			18000-25000MHz
6			30-1000MHz
7		2441MHz* (CH39)	1000-3000MHz
8			3000-8000MHz
9			8000-18000MHz
10			18000-25000MHz
11			1000-3000MHz
12		2480MHz (CH78)	3000-8000MHz
13			8000-18000MHz
14			18000-25000MHz
15	接收	2441MHz (CH38)	30-1000MHz
16			1000-3000MHz
17			3000-8000MHz
18			8000-18000MHz
19			18000-25000MHz

註：1. 以上所有模式之掃頻圖是檢附於附錄中。

2.*: 經評估後，以最差頻率進行 30-1000MHz 量測。

對受測物裝置落於技術規範第 2.7 章節的禁用頻率之混附發射以下列測試模式依規定分別進行量測，所得量測資料請見章節 1.3。

模式	動作狀態	基本頻率	量測頻率範圍
1	發射	2402MHz (CH0)	2310-2430MHz
2		2480MHz (CH78)	2450-2530MHz

測試日期	2019/01/09	環境溫/濕度	24°C/50%
測試電壓	(1) DC 7.4V (透過內建鋰電池供電), (2) DC 5V (USB 透過筆記型電腦供電)		

1.1. 30-1000MHz 頻率範圍，其他不必要發射量測

Mode	充電	Frequency	---
------	----	-----------	-----

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
57.16	13.20	1.97	15.38	30.55	40.00	9.45	Peak
84.32	14.56	2.32	14.65	31.53	40.00	8.47	Peak
149.31	17.16	3.36	10.62	31.14	43.50	12.36	Peak
216.24	17.13	3.76	6.69	27.58	46.00	18.42	Peak
328.76	20.67	4.78	4.55	30.00	46.00	16.00	Peak
444.19	23.05	5.91	3.32	32.28	46.00	13.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
37.76	20.98	1.67	5.70	28.35	40.00	11.65	Peak
93.05	16.24	2.52	8.11	26.87	43.50	16.63	Peak
167.74	16.08	3.50	7.87	27.45	43.50	16.05	Peak
216.24	17.13	3.76	11.14	32.03	46.00	13.97	Peak
312.27	20.19	4.54	13.15	37.88	46.00	8.12	Peak
384.05	22.08	5.58	9.60	37.26	46.00	8.74	Peak

Mode	8-DPSK	Frequency	TX 2441MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
101.78	17.60	2.72	7.31	27.63	43.50	15.87	Peak
144.46	17.53	3.33	13.13	33.99	43.50	9.51	Peak
199.75	15.94	3.66	14.15	33.75	43.50	9.75	Peak
271.53	19.59	4.14	13.33	37.06	46.00	8.94	Peak
335.55	20.86	4.89	9.77	35.52	46.00	10.48	Peak
666.32	25.17	6.89	4.22	36.28	46.00	9.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
41.64	18.90	1.74	9.93	30.57	40.00	9.43	Peak
63.95	12.62	2.04	11.12	25.78	40.00	14.22	Peak
116.33	18.59	2.92	5.37	26.88	43.50	16.62	Peak
144.46	17.53	3.33	7.77	28.63	43.50	14.87	Peak
199.75	15.94	3.66	11.22	30.82	43.50	12.68	Peak
322.94	20.51	4.70	5.57	30.78	46.00	15.22	Peak

Mode	---	Frequency	RX 2441MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
132.82	18.20	3.19	10.16	31.55	43.50	11.95	Peak
194.90	15.85	3.66	11.30	30.81	43.50	12.69	Peak
216.24	17.13	3.76	11.27	32.16	46.00	13.84	Peak
256.01	19.45	4.02	10.31	33.78	46.00	12.22	Peak
384.05	22.08	5.58	4.69	32.35	46.00	13.65	Peak
666.32	25.17	6.89	6.02	38.08	46.00	7.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
101.78	17.60	2.72	5.04	25.36	43.50	18.14	Peak
167.74	16.08	3.50	9.47	29.05	43.50	14.45	Peak
256.01	19.45	4.02	8.34	31.81	46.00	14.19	Peak
321.97	20.48	4.68	6.44	31.60	46.00	14.40	Peak
441.28	23.01	5.90	3.15	32.06	46.00	13.94	Peak
666.32	25.17	6.89	2.98	35.04	46.00	10.96	Peak

1.2. 1000MHz 以上頻率範圍，其他不必要發射量測

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.00	34.22	11.42	-1.98	43.66	54.00	10.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.00	34.22	11.42	-0.80	44.84	54.00	9.16	Peak

Mode	8-DPSK	Frequency	TX 2441MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.00	34.25	13.00	-1.14	46.11	54.00	7.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.00	34.25	13.00	-2.12	45.13	54.00	8.87	Peak

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	34.29	13.21	-3.09	44.41	54.00	9.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	34.29	13.21	-2.82	44.68	54.00	9.32	Peak


1.3. 禁用頻帶量測結果 (其他不必要發射)

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

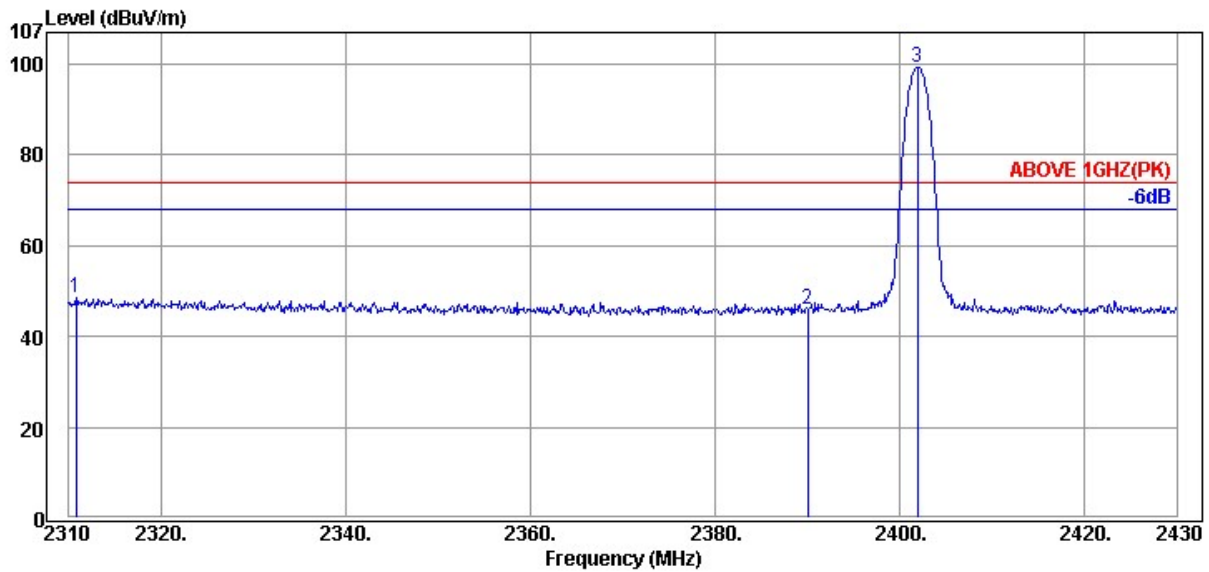

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2310.84	32.03	7.76	8.62	48.41	74.00	25.59	Peak
2390.04	32.16	7.92	6.05	46.13	74.00	27.87	Peak
@ 2401.92	32.16	7.92	59.26	99.34	---	---	Peak

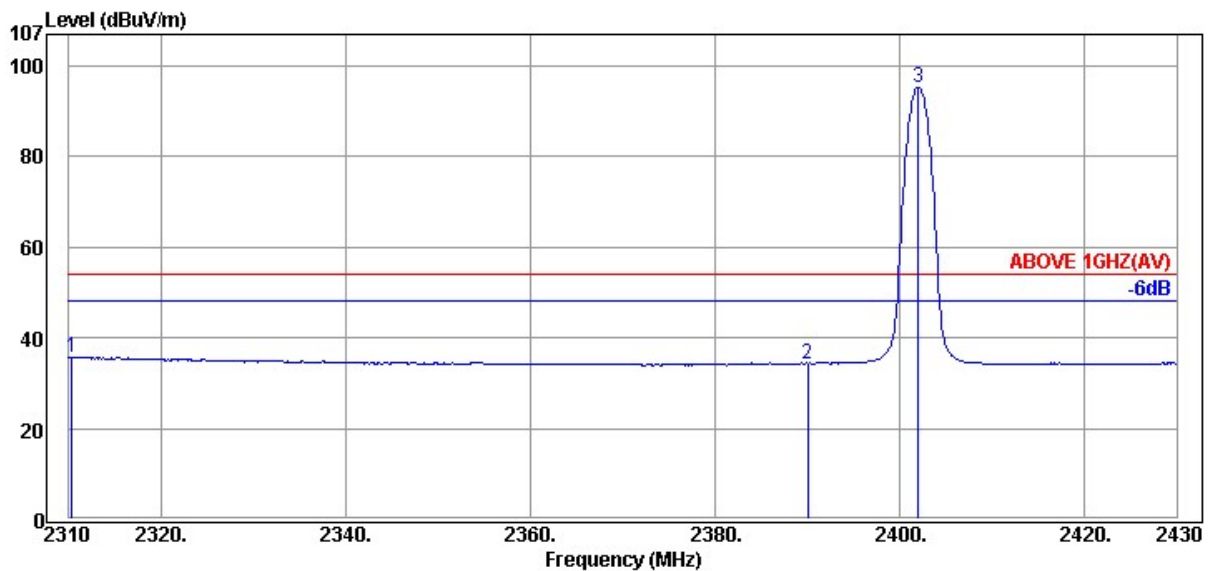


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2310.36	32.03	7.76	-4.01	35.78	54.00	18.22	Average
2390.04	32.16	7.92	-5.72	34.36	54.00	19.64	Average
@ 2402.04	32.16	7.92	55.25	95.33	---	---	Average


備註: “@”為主波，在此章節是不予以判定。

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

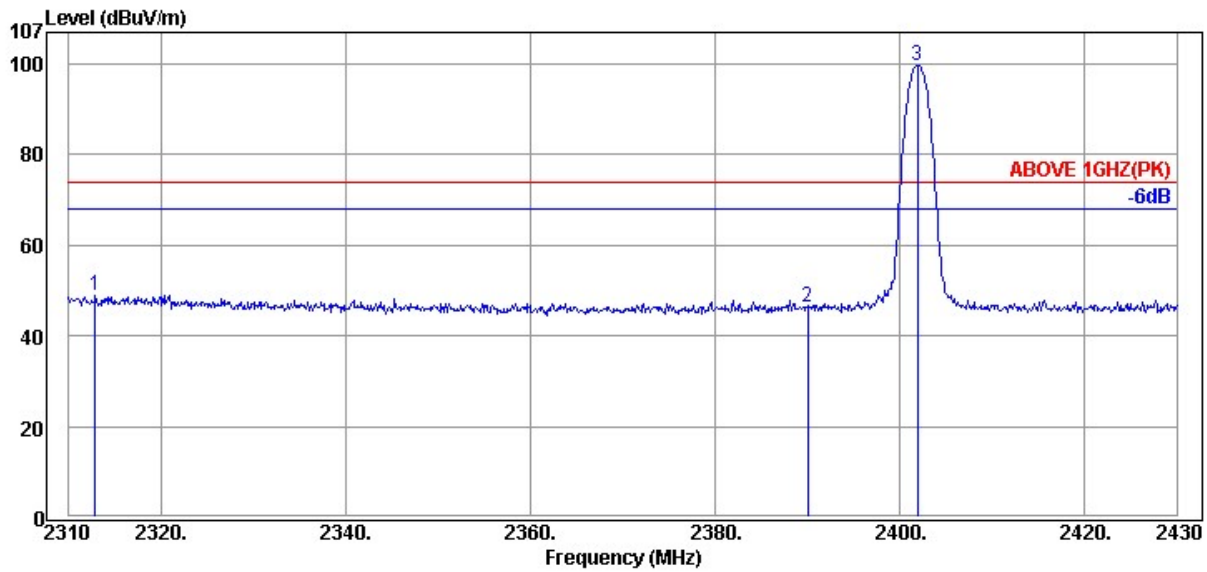

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2312.88	32.03	7.76	9.22	49.01	74.00	24.99	Peak
2390.04	32.16	7.92	6.20	46.28	74.00	27.72	Peak
@ 2401.92	32.16	7.92	59.74	99.82	---	---	Peak

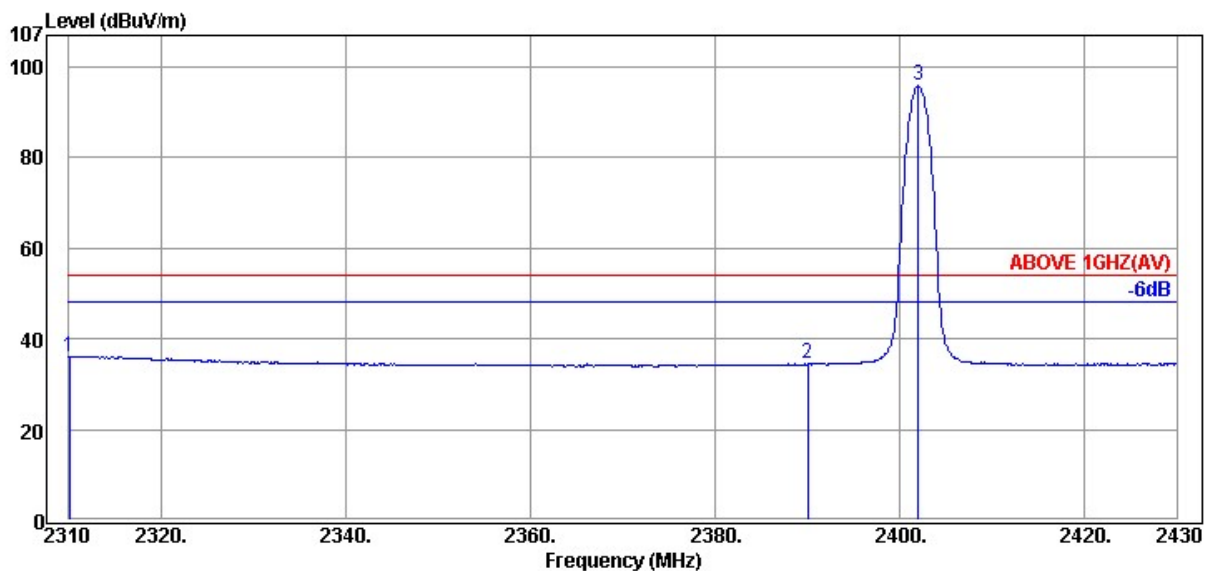


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2310.12	32.03	7.76	-3.59	36.20	54.00	17.80	Average
2390.04	32.16	7.92	-5.65	34.43	54.00	19.57	Average
@ 2402.04	32.16	7.92	55.71	95.79	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

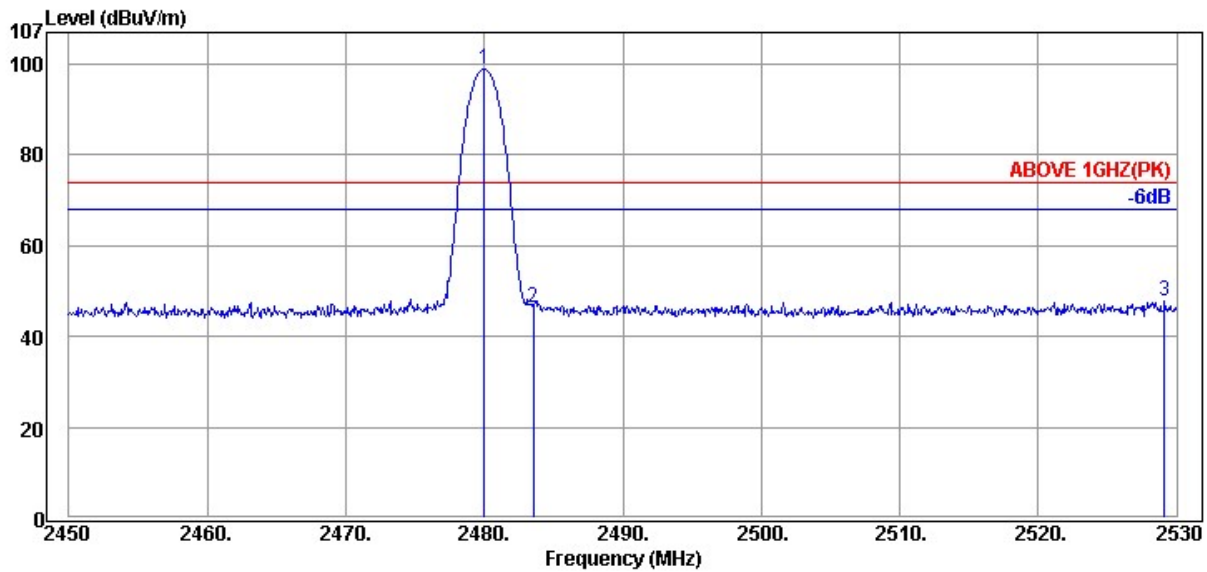

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.00	32.28	7.90	58.73	98.91	---	---	Peak
	2483.52	32.28	7.90	6.00	46.18	74.00	27.82	Peak
	2529.12	32.34	7.98	7.64	47.96	74.00	26.04	Peak

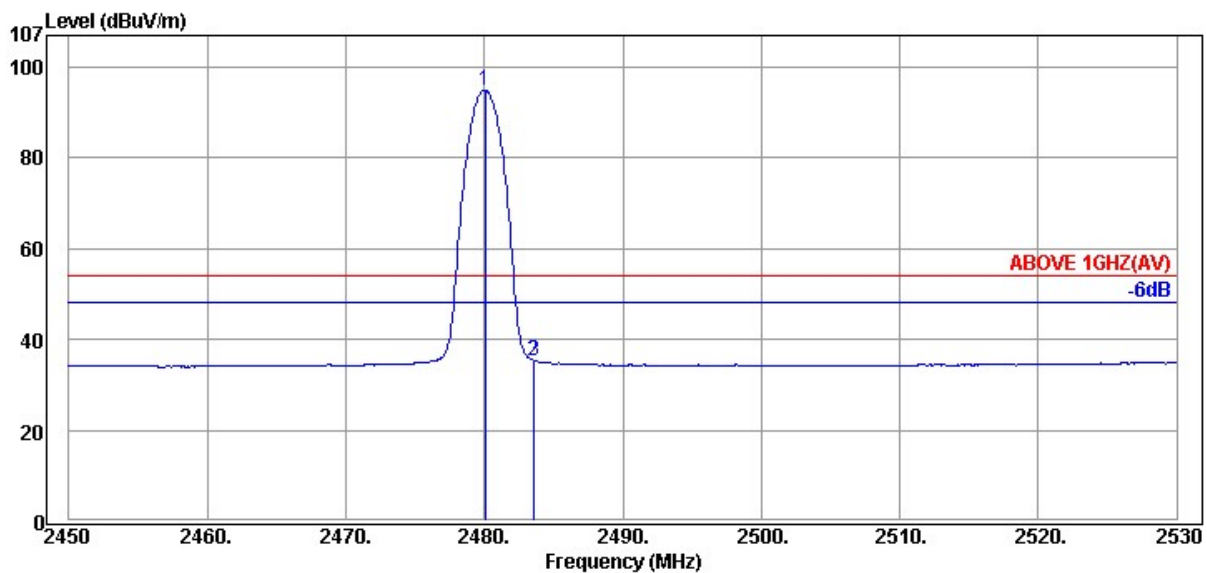


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.08	32.28	7.90	54.72	94.90	---	---	Average
	2483.52	32.28	7.90	-4.86	35.32	54.00	18.68	Average
	2483.60	32.28	7.90	-4.92	35.26	54.00	18.74	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

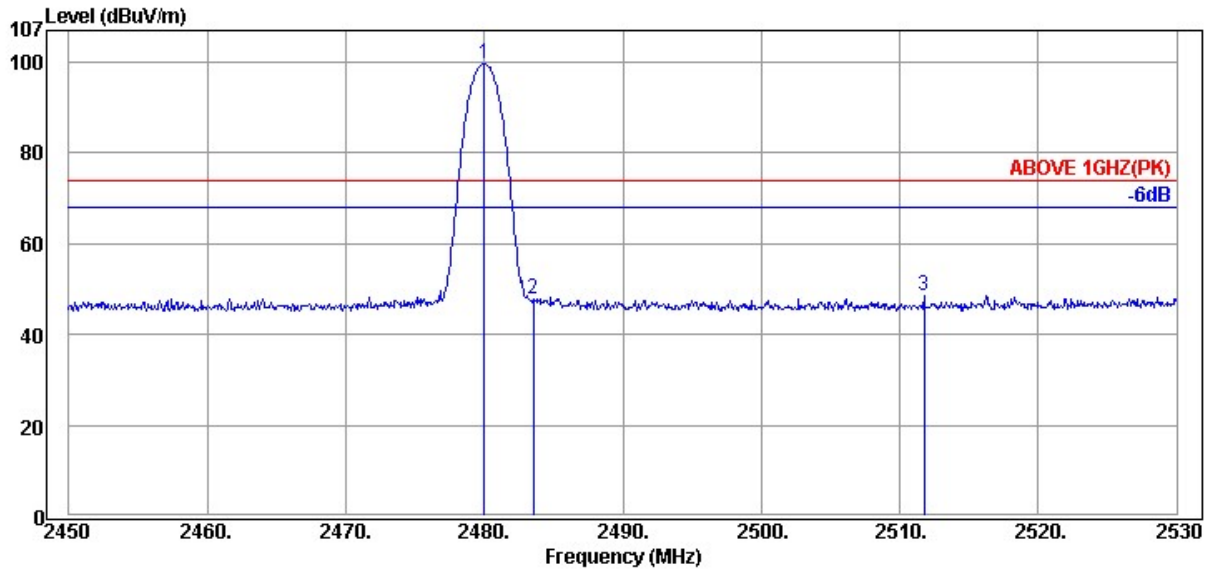

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.00	32.28	7.90	59.46	99.64	---	---	Peak
	2483.52	32.28	7.90	7.75	47.93	74.00	26.07	Peak
	2511.76	32.32	7.94	8.21	48.47	74.00	25.53	Peak

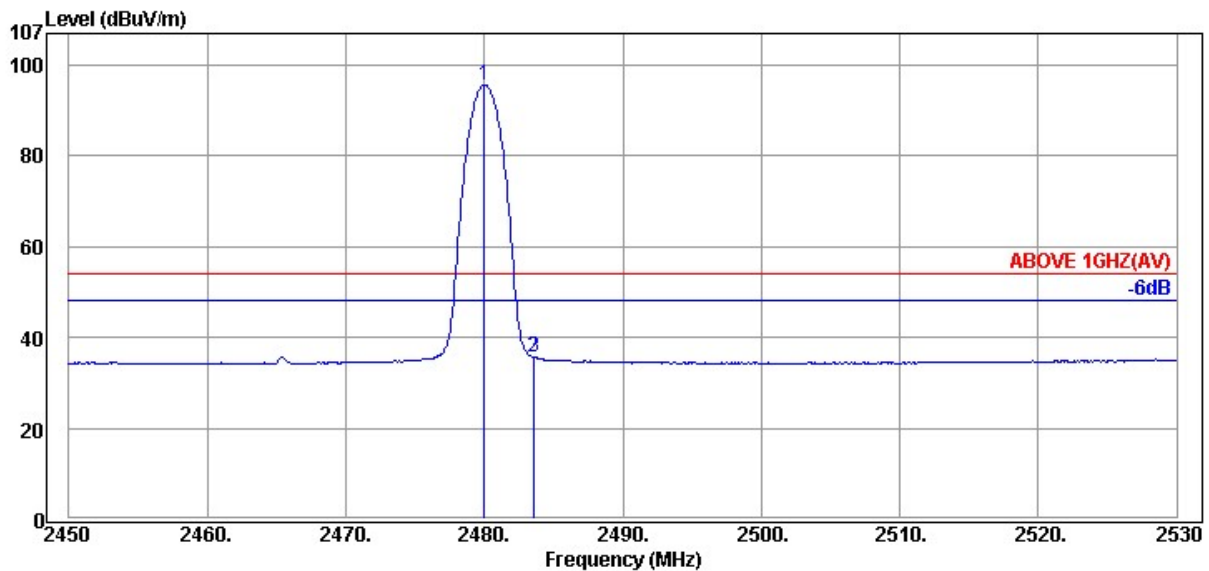

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.00	32.28	7.90	55.46	95.64	---	---	Average
	2483.52	32.28	7.90	-4.57	35.61	54.00	18.39	Average
	2483.60	32.28	7.90	-4.59	35.59	54.00	18.41	Average

備註：“@”為主波，在此章節是不予以判定。


2. 20dB 頻寬之量測

測試日期	2019/01/07	環境溫/濕度	23°C/45%
測試電壓	DC 5V (透過筆記型電腦供電)		

2.1. 20dB 頻寬

模式	測試頻率 (MHz)	20dB 頻寬 (MHz)	頻道間隔參考限制值 2/3 (20dB 頻寬) (MHz)
GFSK	2402	0.9179	0.612
	2441	0.9182	0.612
	2480	0.9189	0.613
8-DPSK	2402	1.259	0.839
	2441	1.259	0.839
	2480	1.260	0.840

2.2. 20dB 頻寬之量測圖

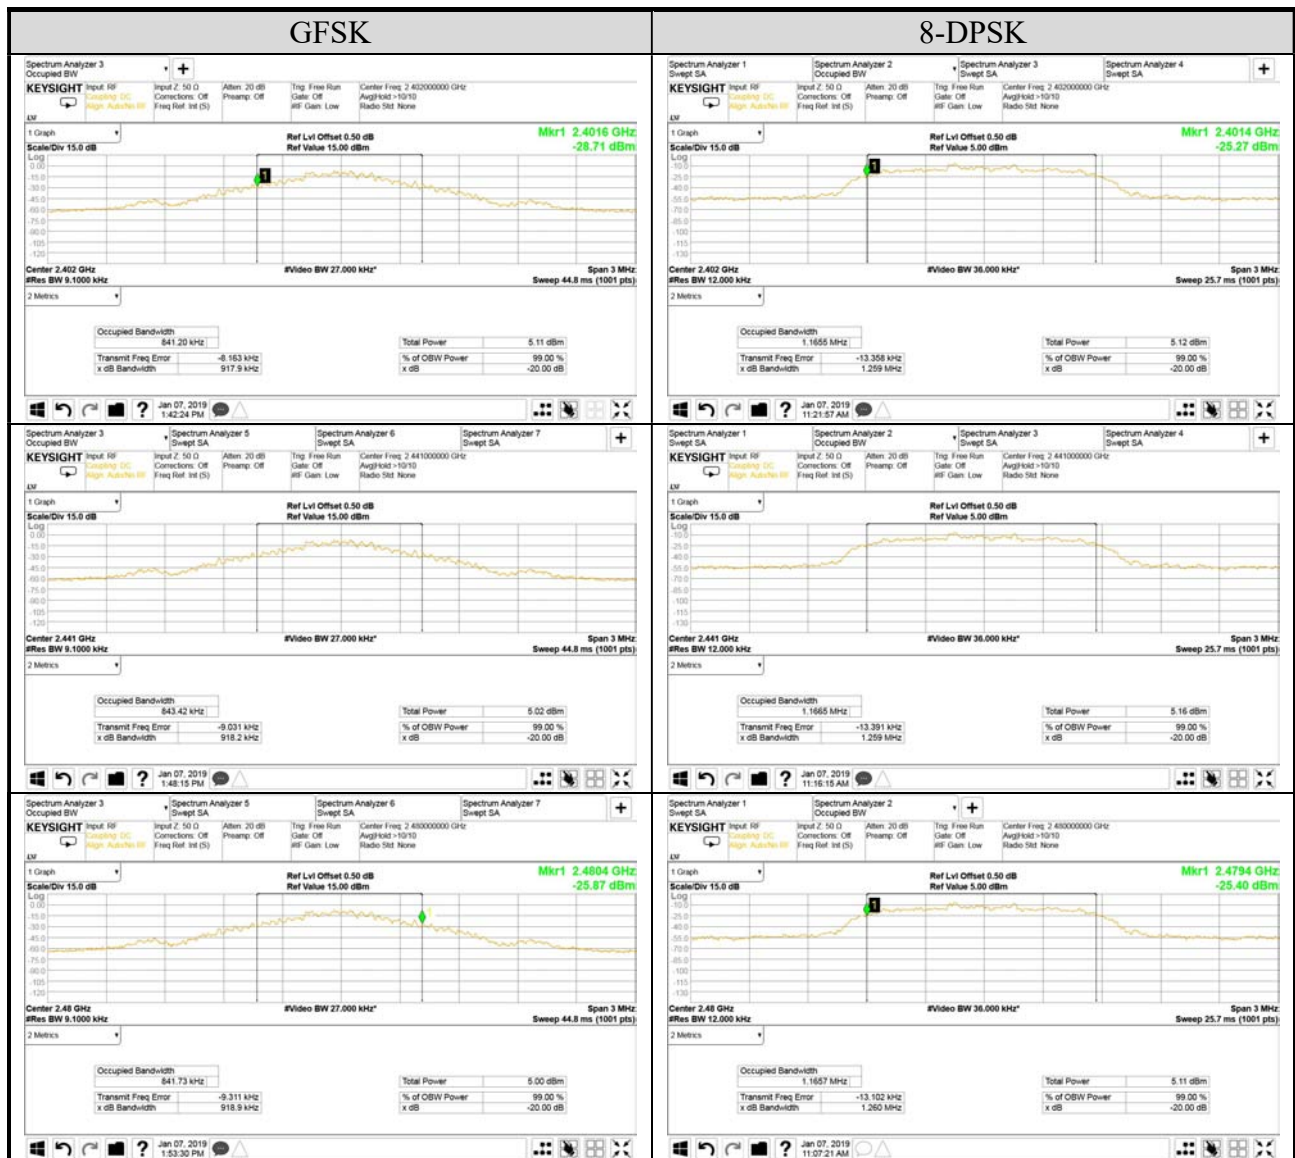


3. 載波頻率間隔之量測


測試日期	2019/01/07	環境溫/濕度	23°C/45%
測試電壓	DC 5V (透過筆記型電腦供電)		

3.1. 載波頻率間隔

模式	測試頻率 (MHz)	頻道間隔(MHz)	頻道間隔參考限制值 2/3 (20dB 頻寬) (MHz)
GFSK	2402	0.999	>0.613
	2441 (左邊鄰近頻道)	1.002	
	2441 (右邊鄰近頻道)	0.996	
	2480	1.002	
8-DPSK	2402	0.999	>0.840
	2441 (左邊鄰近頻道)	0.999	
	2441 (右邊鄰近頻道)	0.999	
	2480	1.002	


3.2. 載波頻率間隔之量測圖

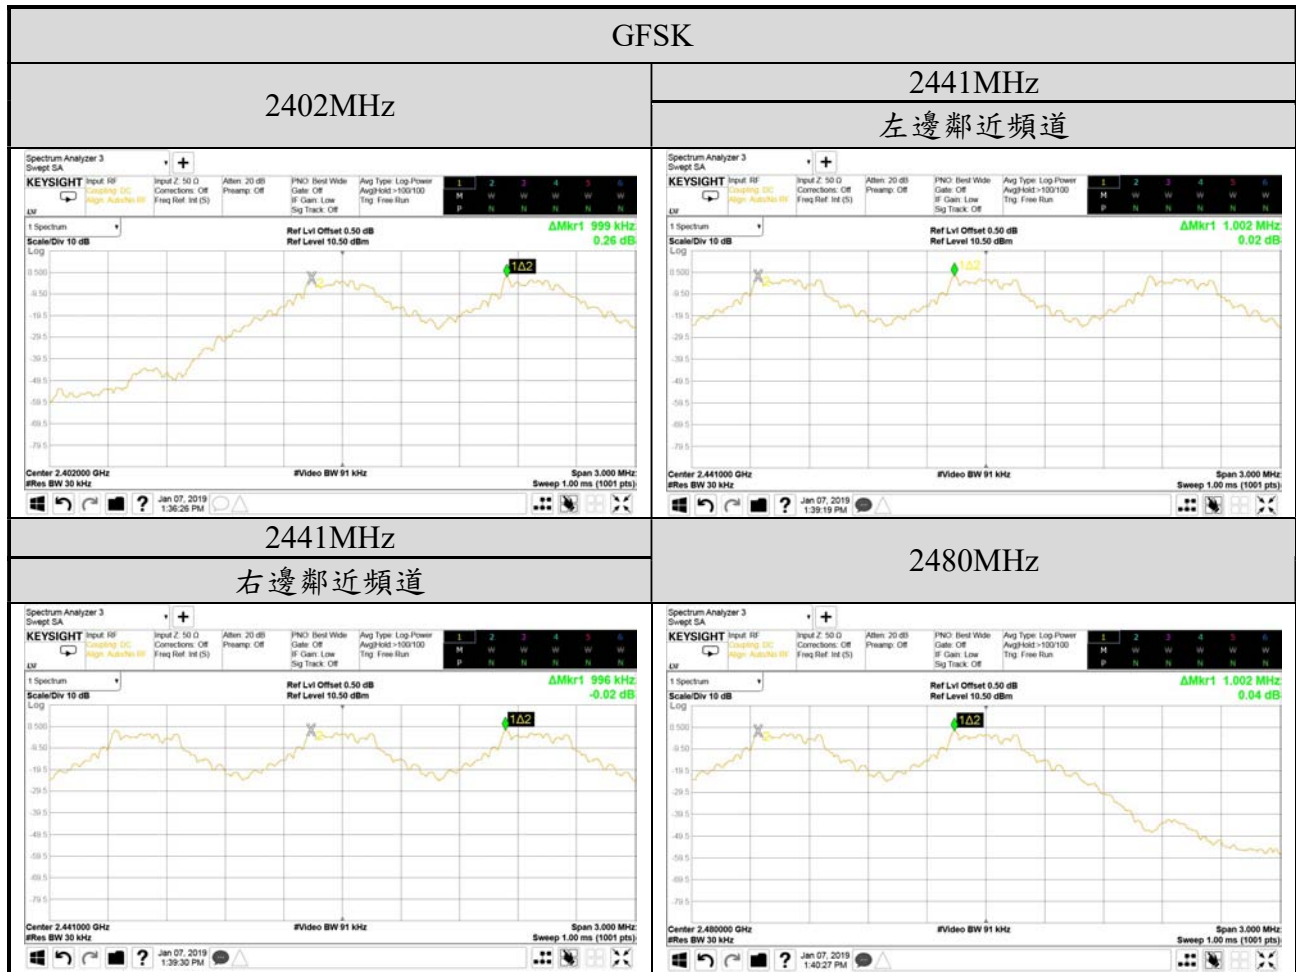

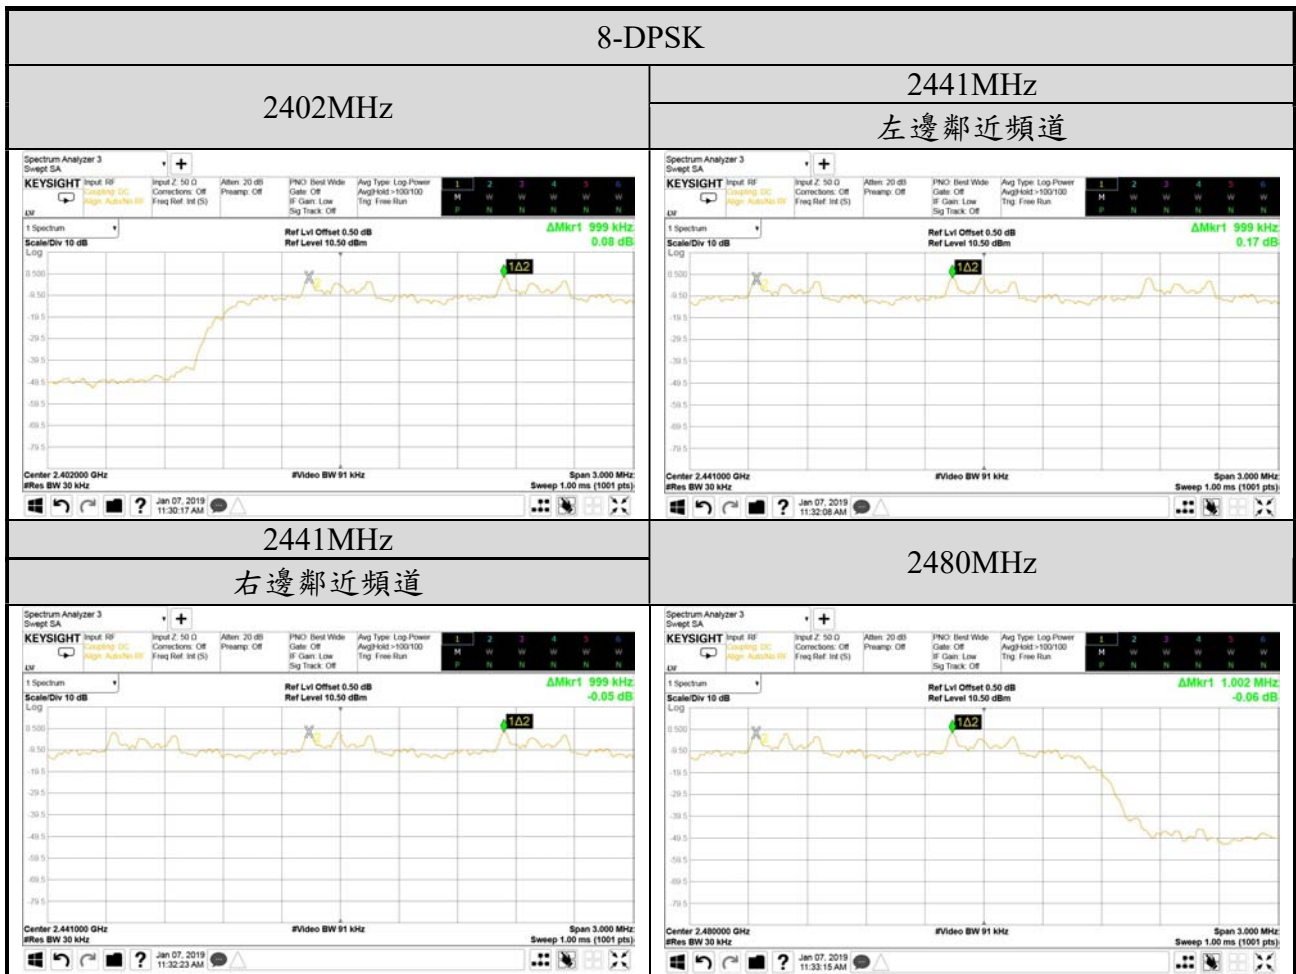

4. 跳頻頻率數目之量測

測試日期	2019/01/07	環境溫/濕度	23°C/45%
測試電壓	DC 5V (透過筆記型電腦供電)		

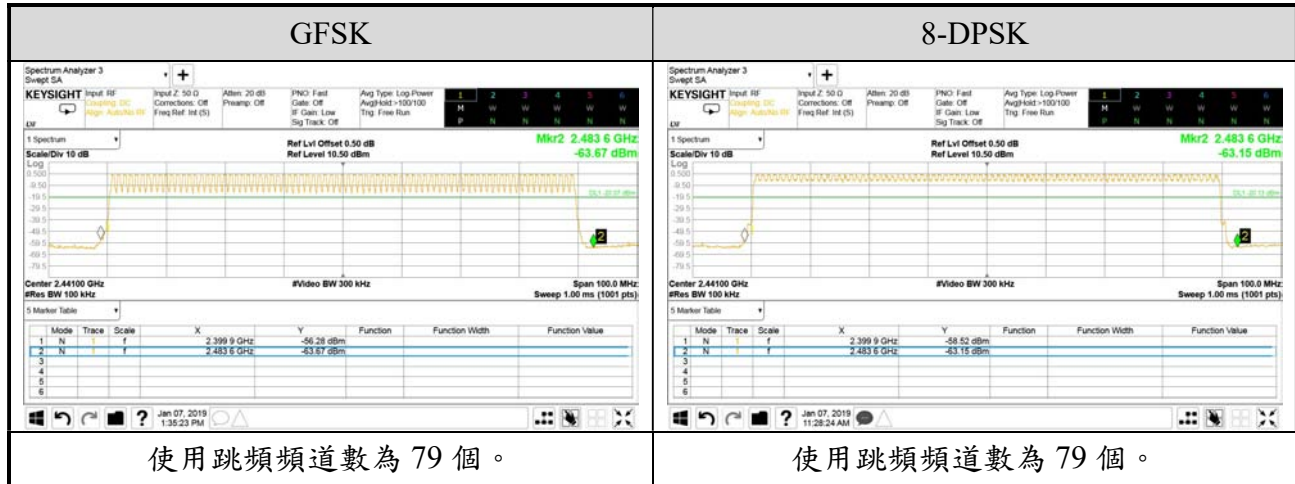

5. 佔用時間(停留時間)之量測

測試日期	2019/01/07	環境溫/濕度	23℃/45%
測試電壓	DC 5V (透過筆記型電腦供電)		

5.1. 佔用時間(停留時間)

模式	測試頻率 (MHz)	封包	每秒出現頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
GFSK	2402	DH1	10	0.399	126.084	<400
		DH3	5	1.660	262.280	
		DH5	4	2.910	367.824	

週期之計算: 79 頻道數 * 0.4 秒 = 31.6 秒

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.399 \text{ ms} = 126.084 \text{ ms} (<400\text{ms})$$

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.660 \text{ ms} = 262.280 \text{ ms} (<400\text{ms})$$

封包模式: DH5

以每1秒出現 4 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$4 \text{ 頻道數} * 31.6 \text{ 秒} * 2.910 \text{ ms} = 367.824 \text{ ms} (<400\text{ms})$$

模式	測試頻率 (MHz)	封包	每秒出現頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
GFSK	2441	DH1	10	0.399	126.084	<400
		DH3	5	1.660	262.280	
		DH5	4	2.900	366.560	

週期之計算: 79 頻道數 * 0.4 秒 = 31.6 秒

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.399 \text{ ms} = 126.084 \text{ ms} (<400\text{ms})$$

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.660 \text{ ms} = 262.280 \text{ ms} (<400\text{ms})$$

封包模式: DH5

以每1秒出現 4 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$4 \text{ 頻道數} * 31.6 \text{ 秒} * 2.900 \text{ ms} = 366.560 \text{ ms} (<400\text{ms})$$

模式	測試頻率 (MHz)	封包	每秒出現頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
GFSK	2480	DH1	10	0.399	126.084	<400
		DH3	5	1.650	260.700	
		DH5	4	2.900	366.560	

週期之計算: 79 頻道數 * 0.4 秒 = 31.6 秒

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.399 \text{ ms} = 126.084 \text{ ms} (<400\text{ms})$$

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.650 \text{ ms} = 260.700 \text{ ms} (<400\text{ms})$$

封包模式: DH5

以每1秒出現 4 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$4 \text{ 頻道數} * 31.6 \text{ 秒} * 2.900 \text{ ms} = 366.560 \text{ ms} (<400\text{ms})$$

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
8-DPSK	2402	3DH1	10	0.405	127.980	<400
		3DH3	5	1.660	262.280	
		3DH5	4	2.900	366.560	

週期之計算: 79 頻道數 * 0.4 秒 = 31.6 秒

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

10 頻道數 * 31.6 秒 * 0.4050 ms = 127.9800 ms (<400ms)

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

5 頻道數 * 31.6 秒 * 1.6600 ms = 262.2800 ms (<400ms)

封包模式: DH5

以每1秒出現 4 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

4 頻道數 * 31.6 秒 * 2.9000 ms = 366.5600 ms (<400ms)

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
8-DPSK	2441	3DH1	10	0.405	127.980	<400
		3DH3	5	1.660	262.280	
		3DH5	4	2.900	366.560	

週期之計算: 79 頻道數 * 0.4 秒 = 31.6 秒

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

10 頻道數 * 31.6 秒 * 0.4050 ms = 127.9800 ms (<400ms)

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

5 頻道數 * 31.6 秒 * 1.6600 ms = 262.2800 ms (<400ms)

封包模式: DH5

以每1秒出現 4 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

4 頻道數 * 31.6 秒 * 2.9000 ms = 366.5600 ms (<400ms)

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
8-DPSK	2480	3DH1	10	0.405	127.980	<400
		3DH3	5	1.650	260.700	
		3DH5	4	2.910	367.824	

週期之計算: 79 頻道數 * 0.4 秒 = 31.6 秒

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

10 頻道數 * 31.6 秒 * 0.4050 ms = 127.9800 ms (<400ms)

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


5 頻道數 * 31.6 秒 * 1.6500 ms = 260.7000 ms (<400ms)

封包模式: DH5

以每1秒出現 4 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

4 頻道數 * 31.6 秒 * 2.9100 ms = 367.8240 ms (<400ms)

5.2. 佔用時間(停留時間)之量測圖

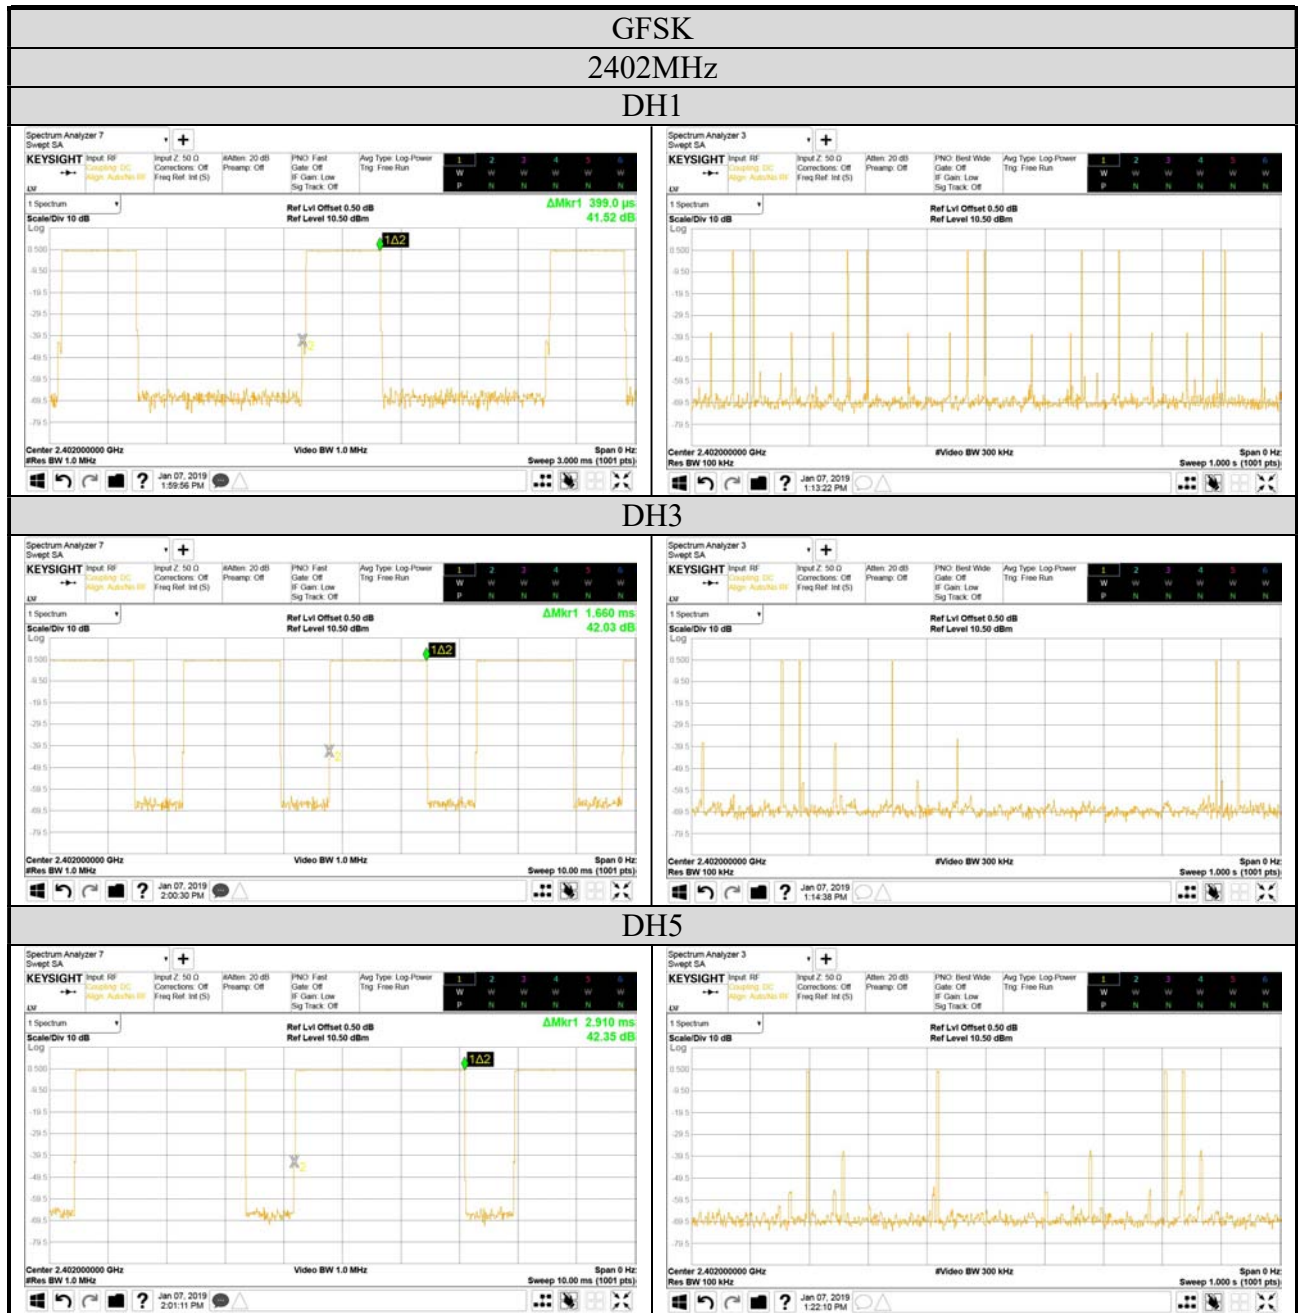



GFSK 2441MHz DH1



DH3



DH5

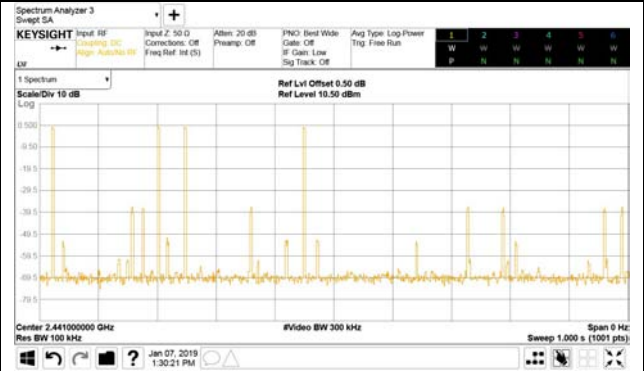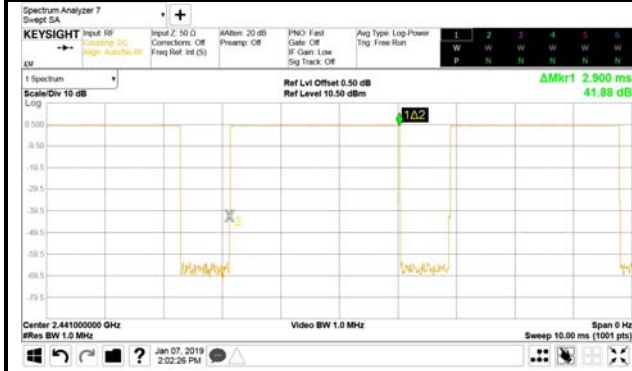



GFSK 2480MHz DH1



DH3



DH5

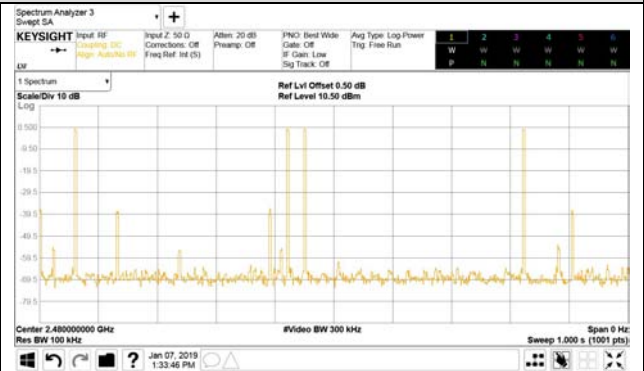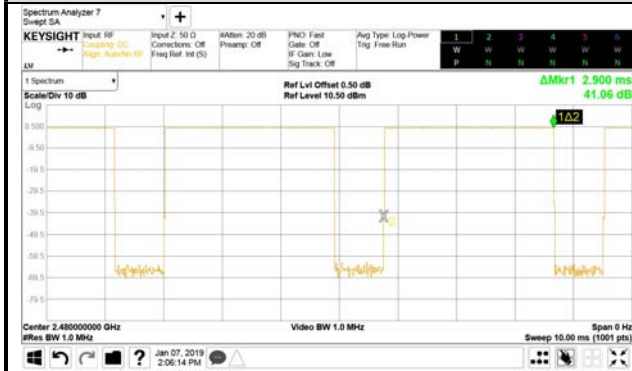


8-DPSK

2402MHz


3DH1




3DH3

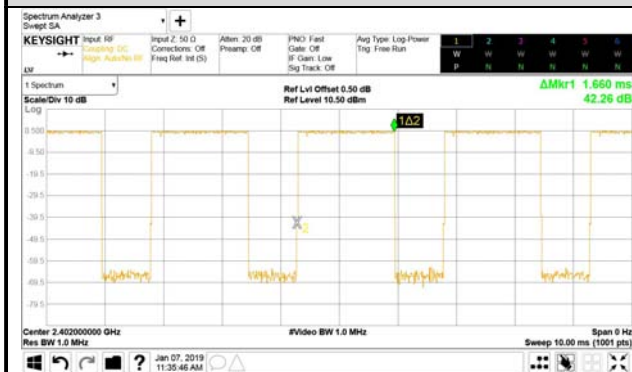


3DH5

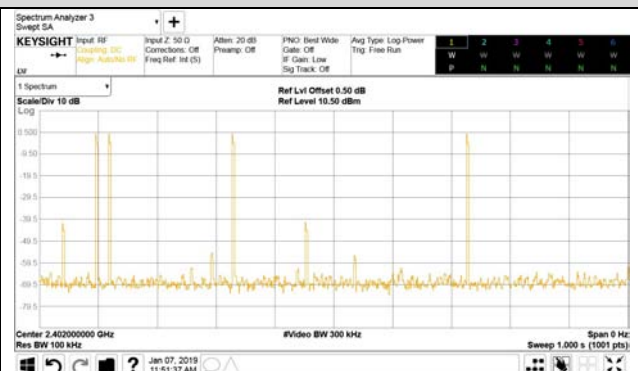


8-DPSK
2441MHz
3DH1

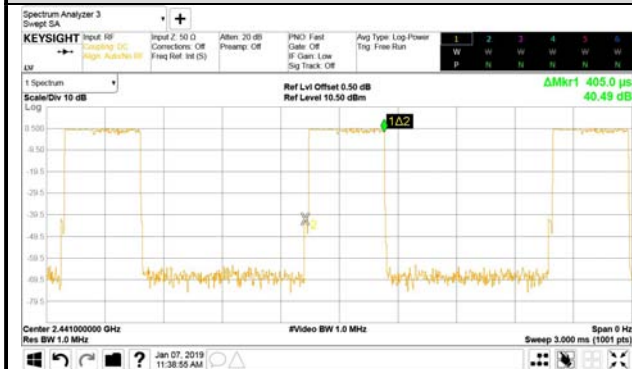

3DH3

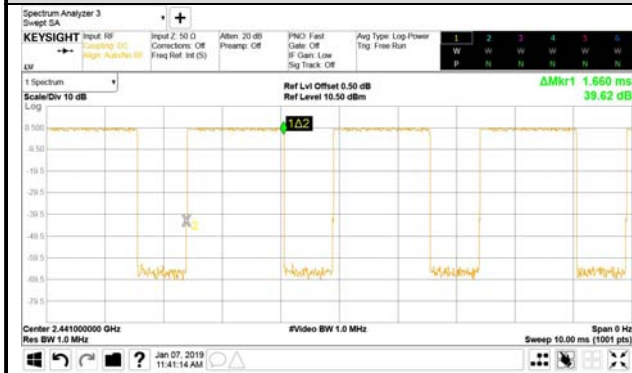



3DH5

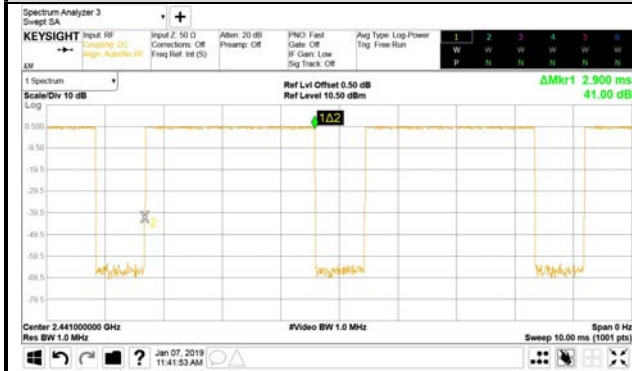


8-DPSK
2480MHz
3DH1



3DH3

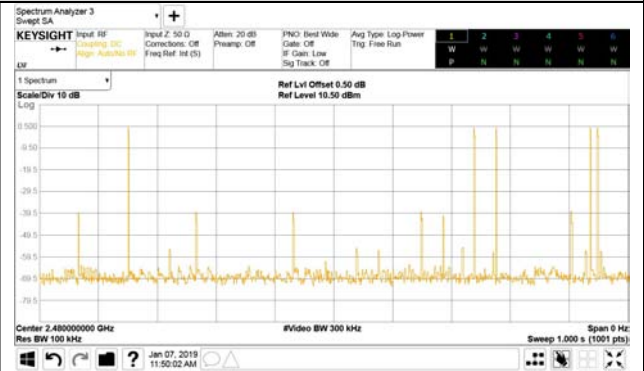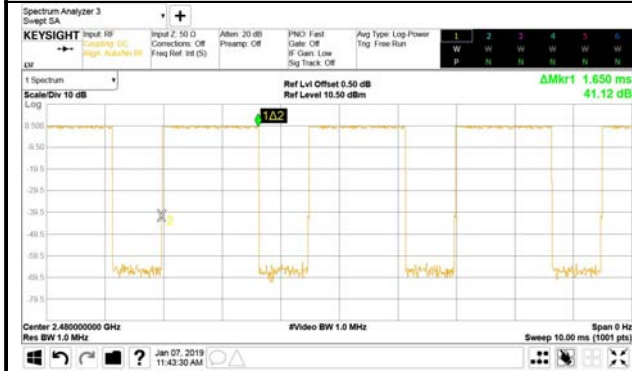

3DH5

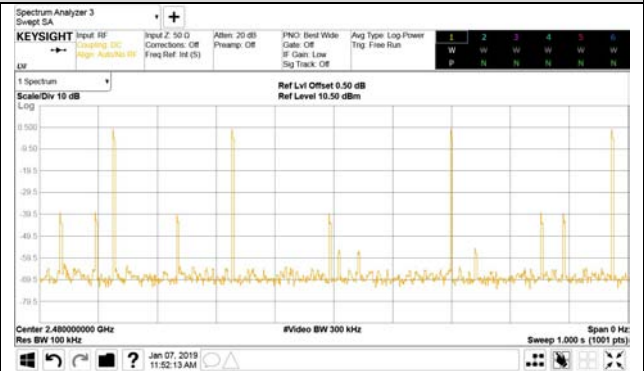


6. 峰值輸出功率之量測

測試日期	2019/01/07	環境溫/濕度	23°C/45%
測試電壓	DC 5V (透過筆記型電腦供電)		

6.1. 峰值輸出功率



模式	測試頻率 (MHz)	峰值輸出功率(dBm)
GFSK	2402	0.06
	2441	0.03
	2480	0.01
8-DPSK	2402	1.28
	2441	1.32
	2480	1.30

6.2. 峰值輸出功率之量測圖

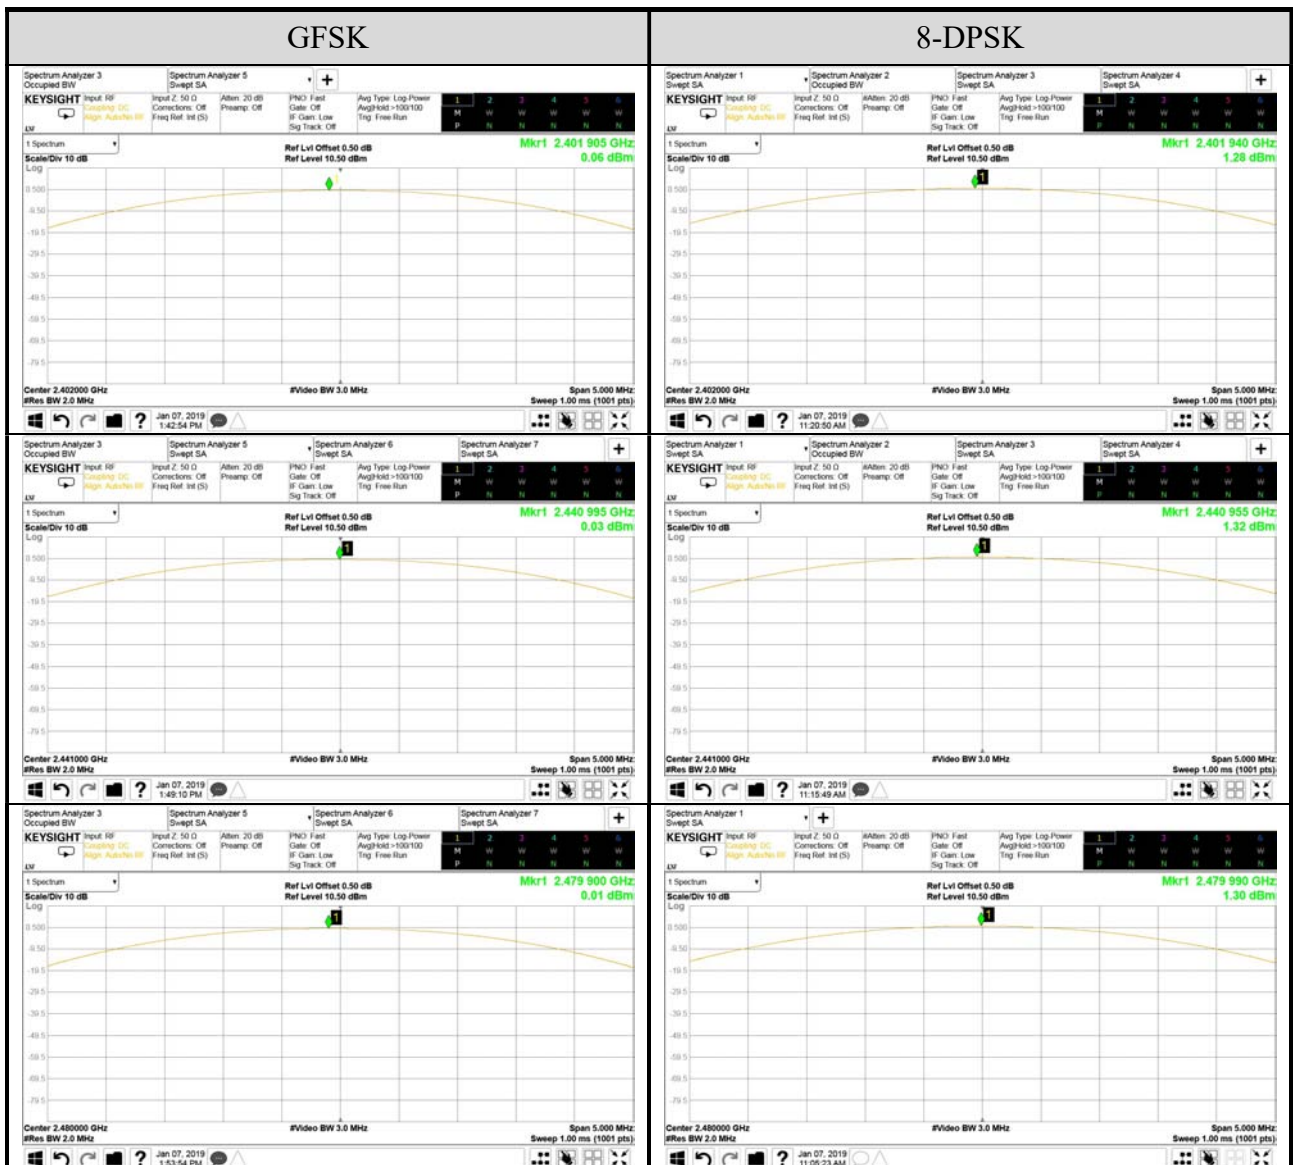


7. 頻帶邊緣之 RF 傳導發射之量測


測試日期	2019/01/07	環境溫/濕度	23°C/45%
測試電壓	DC 5V (透過筆記型電腦供電)		

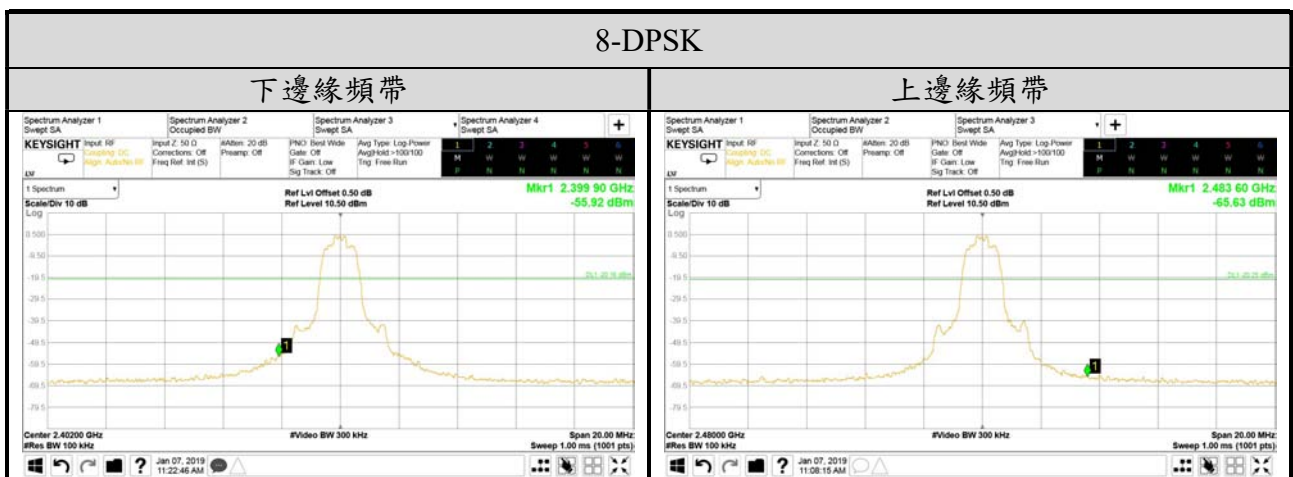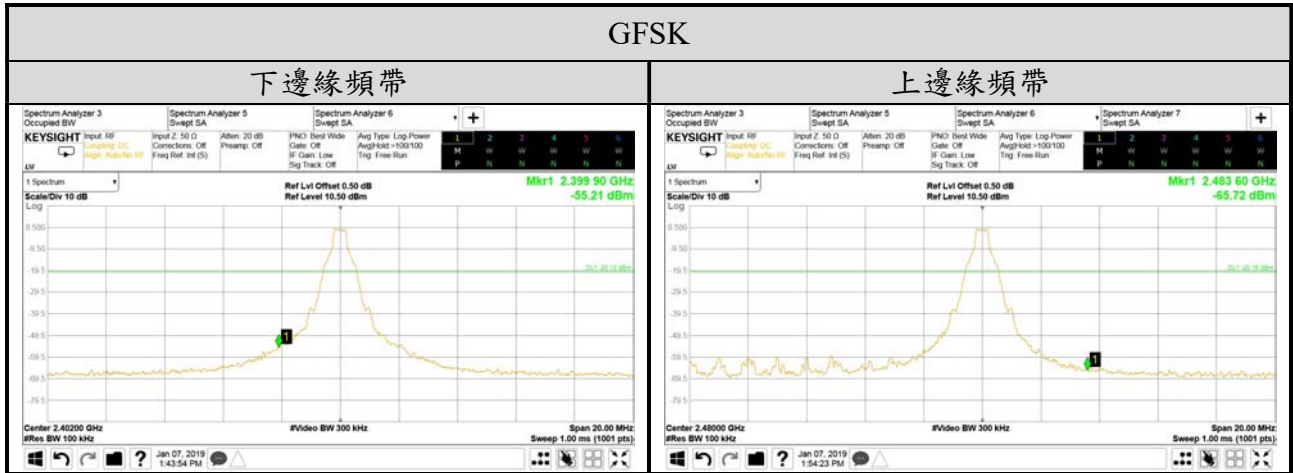

8. 混附發射之 RF 傳導發射之量測

測試日期	2019/01/07	環境溫/濕度	23°C/45%
測試電壓	DC 5V (透過筆記型電腦供電)		

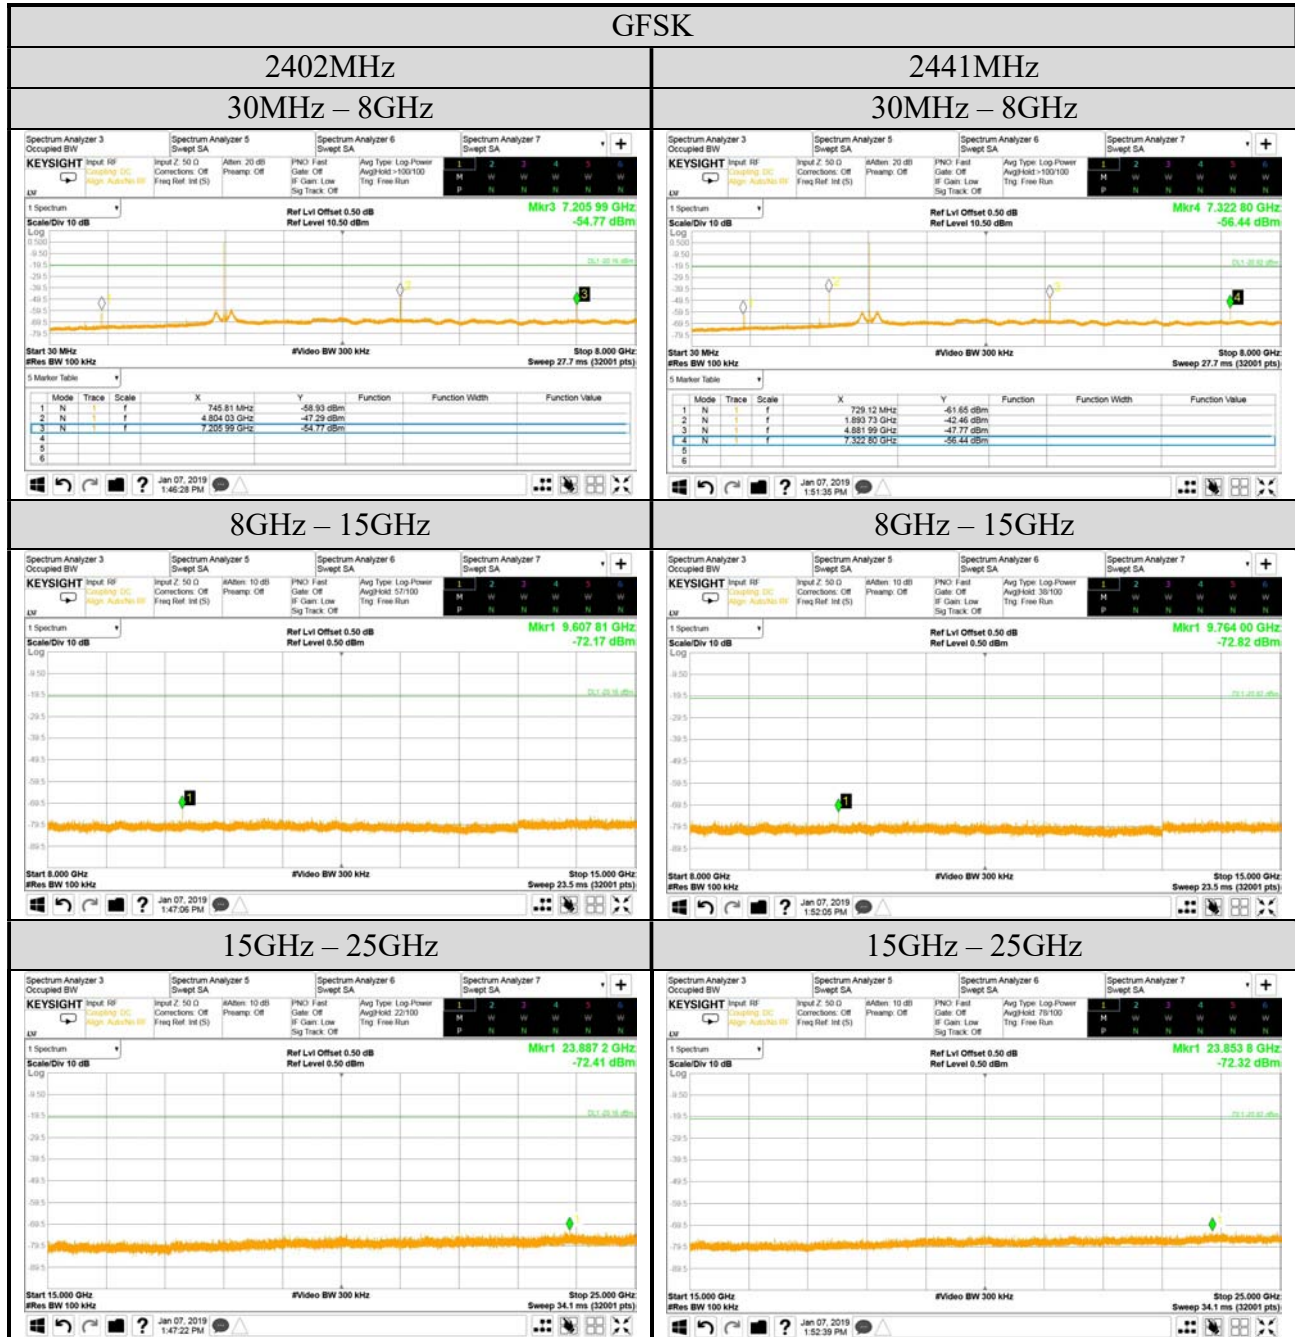


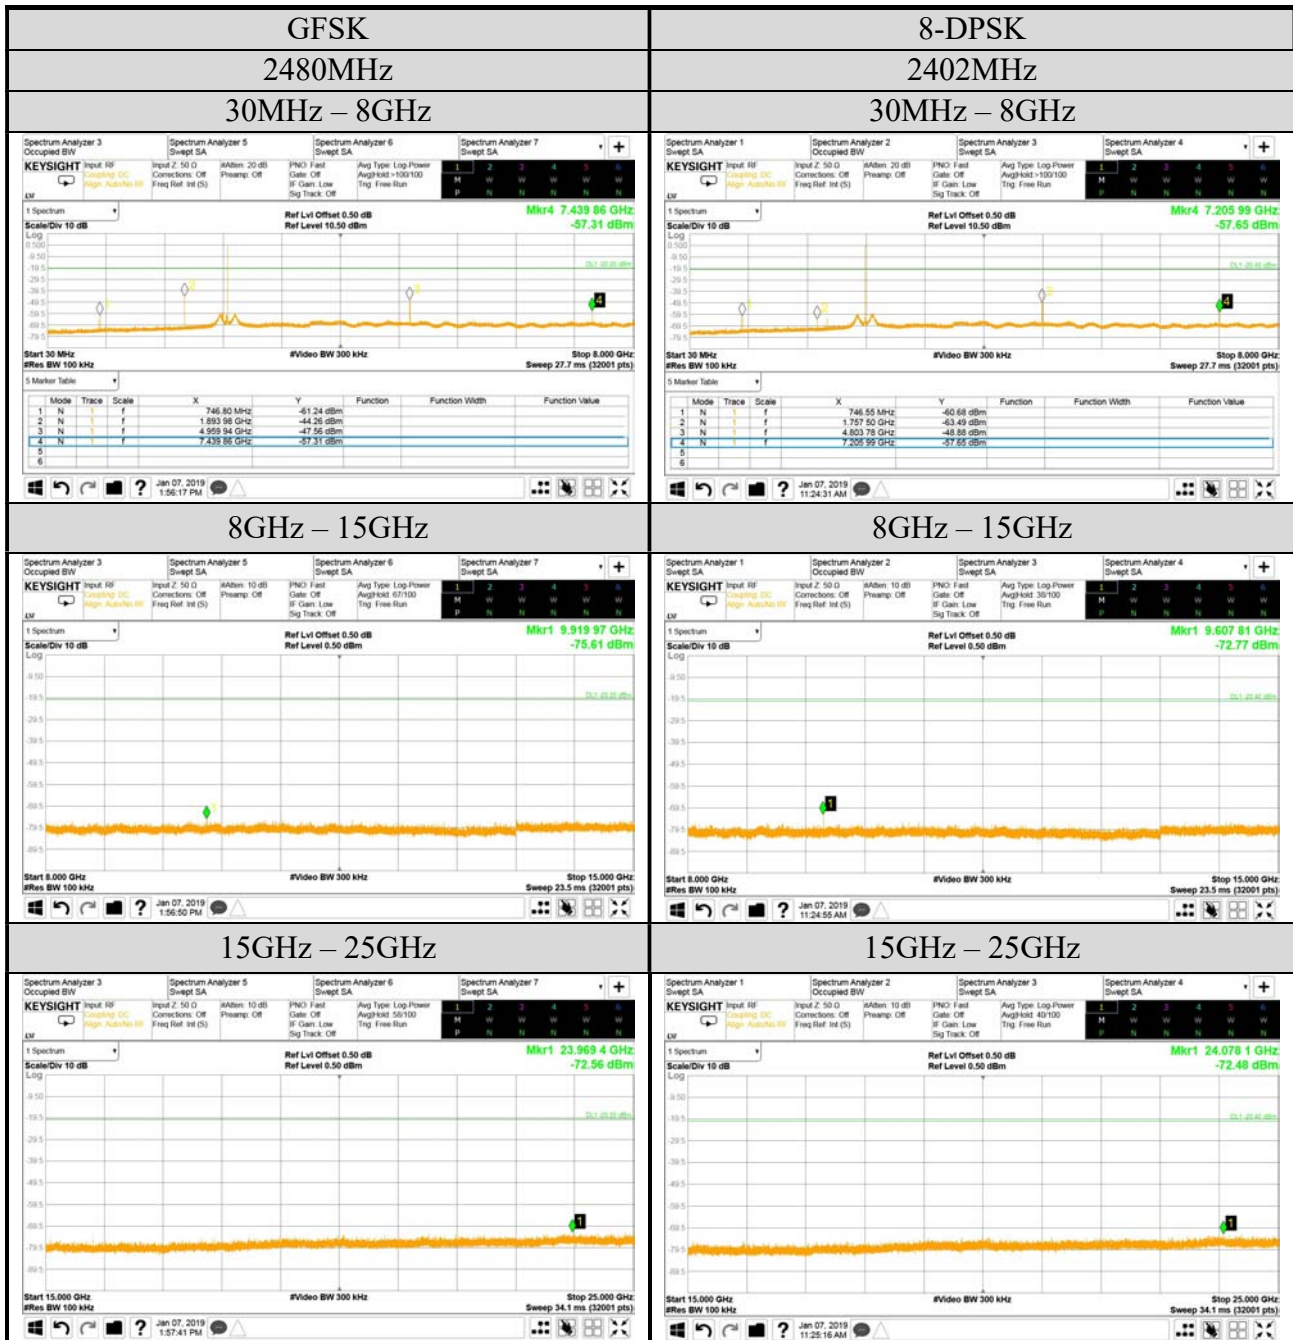

8-DPSK


2441MHz

30MHz – 8GHz

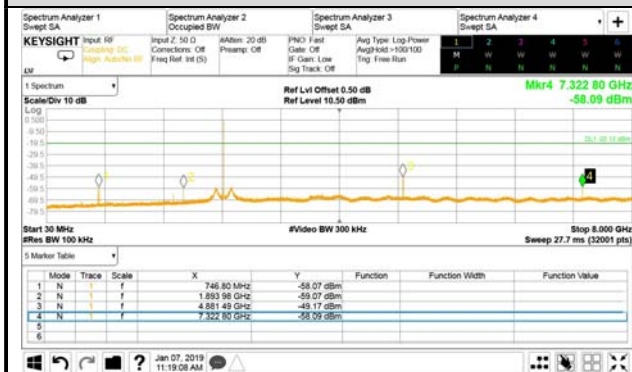


2480MHz


30MHz – 8GHz

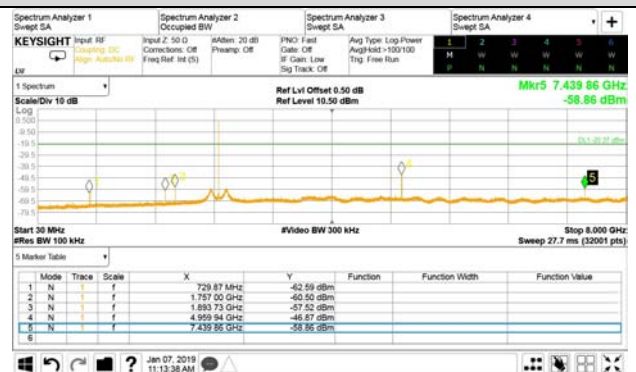


8GHz – 15GHz

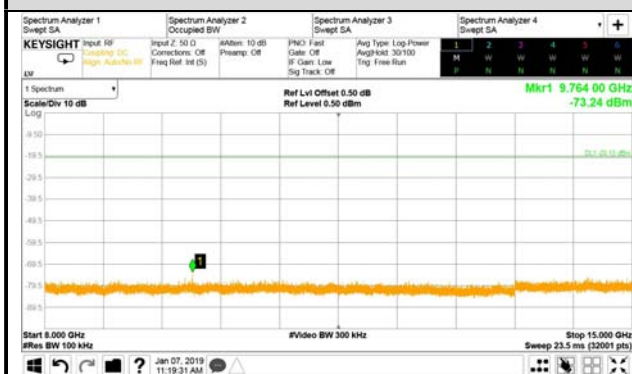

8GHz – 15GHz

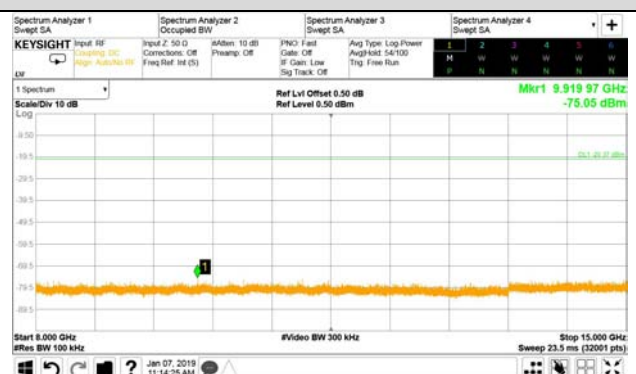

15GHz – 25GHz

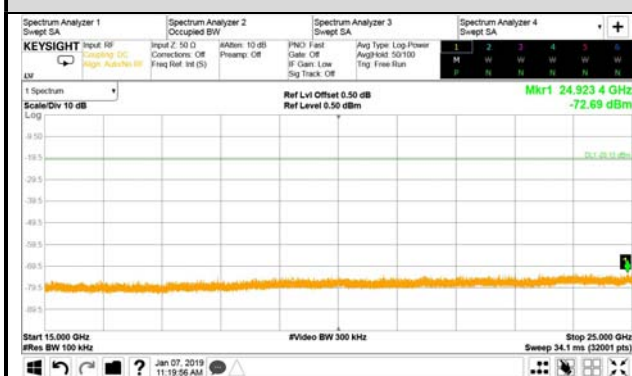

15GHz – 25GHz

