





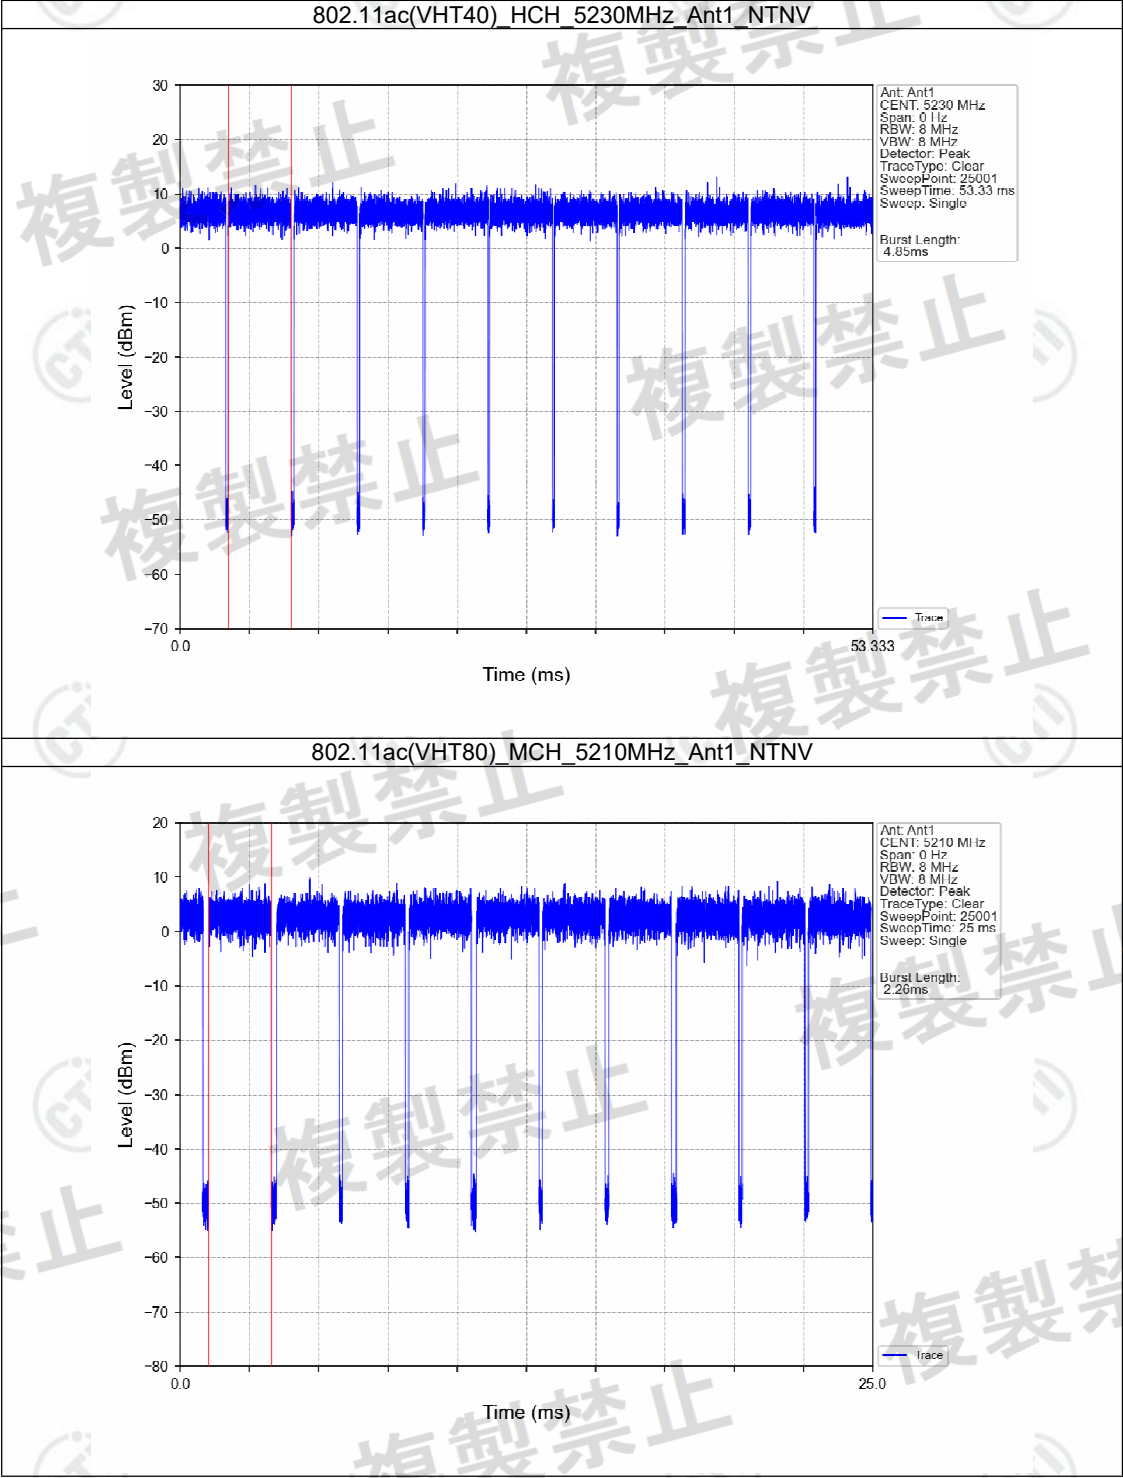

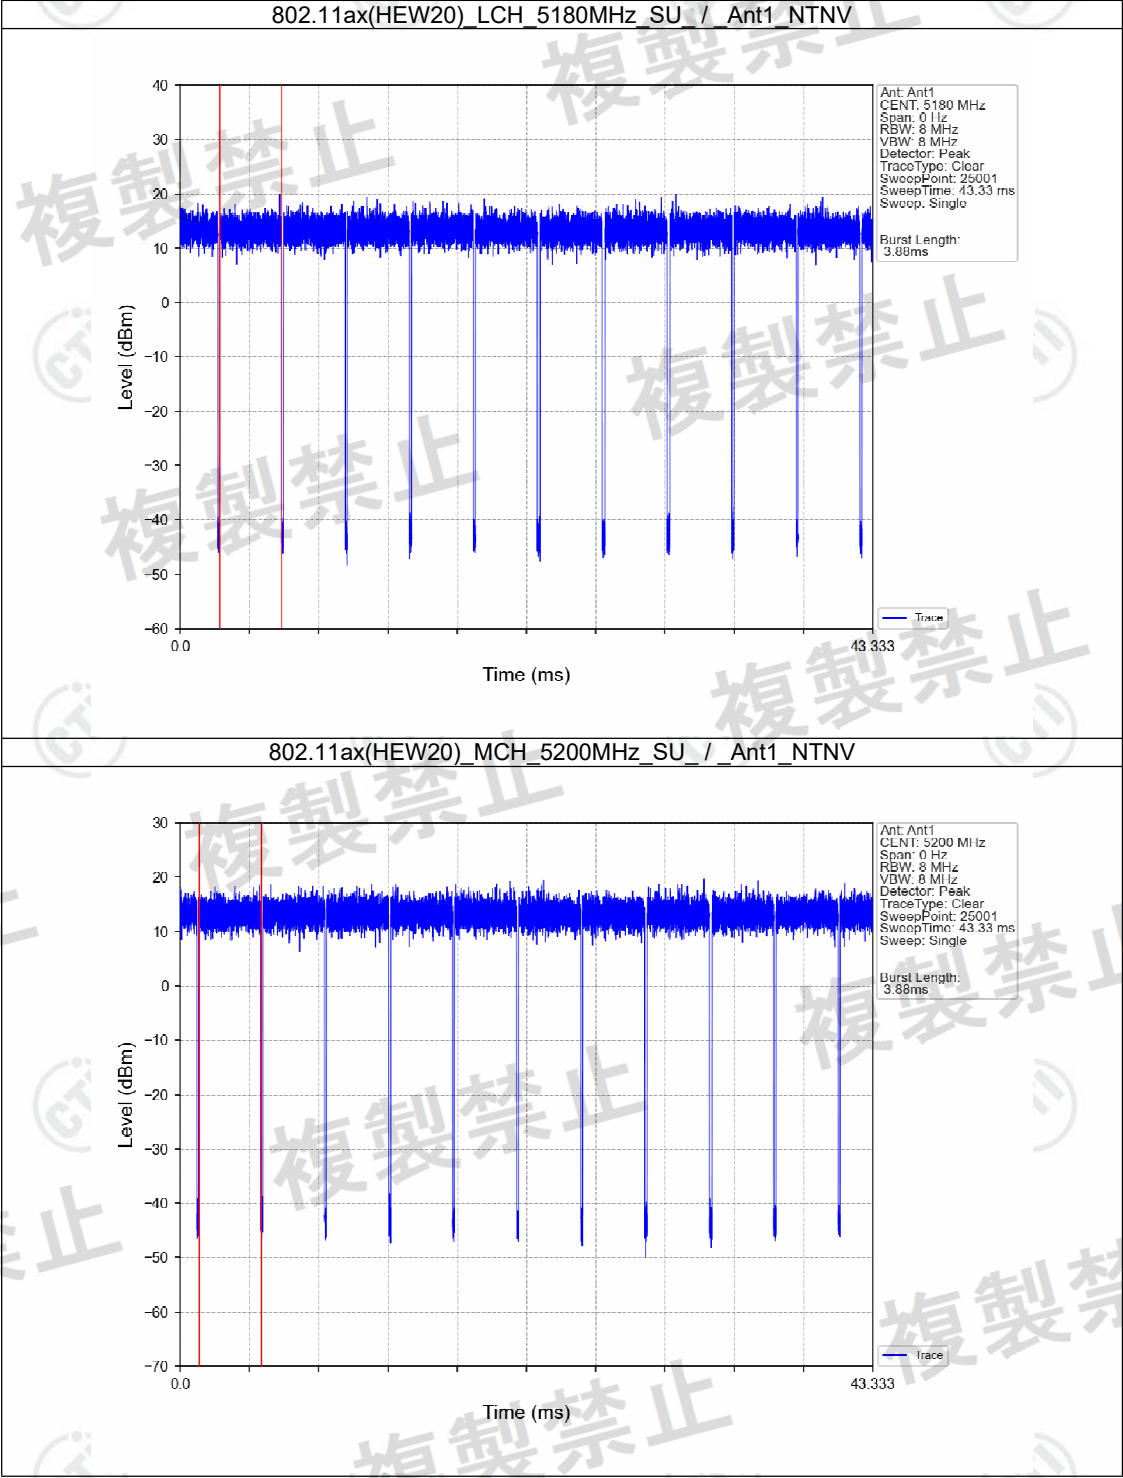

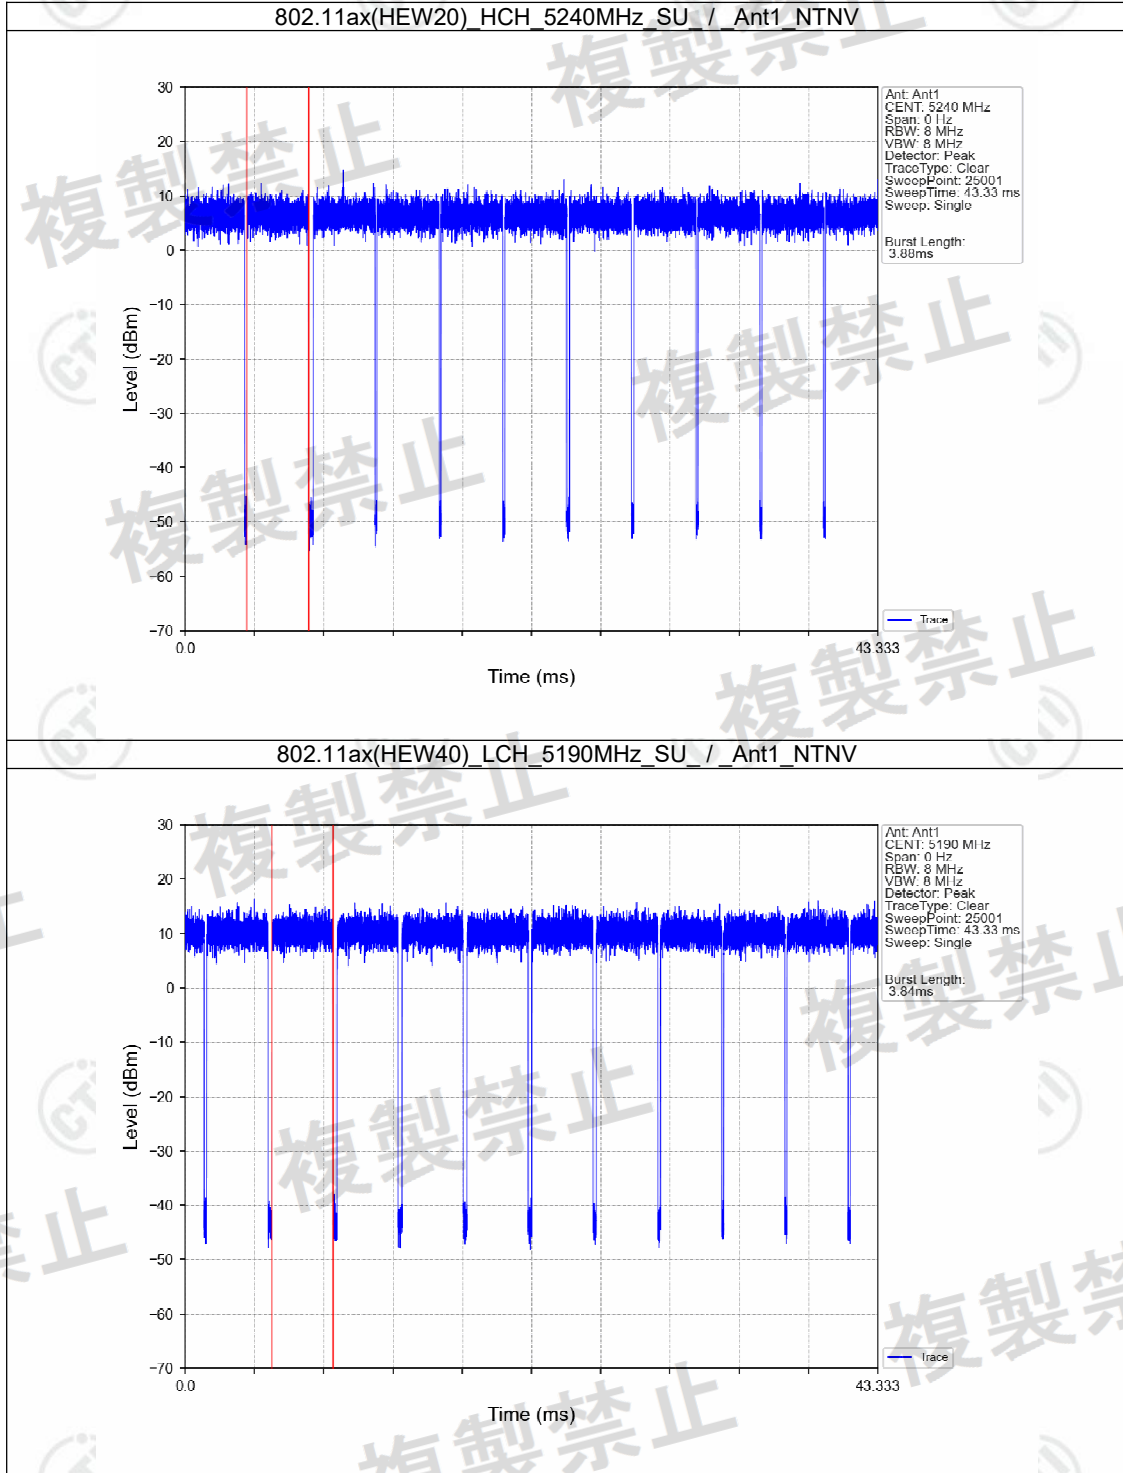

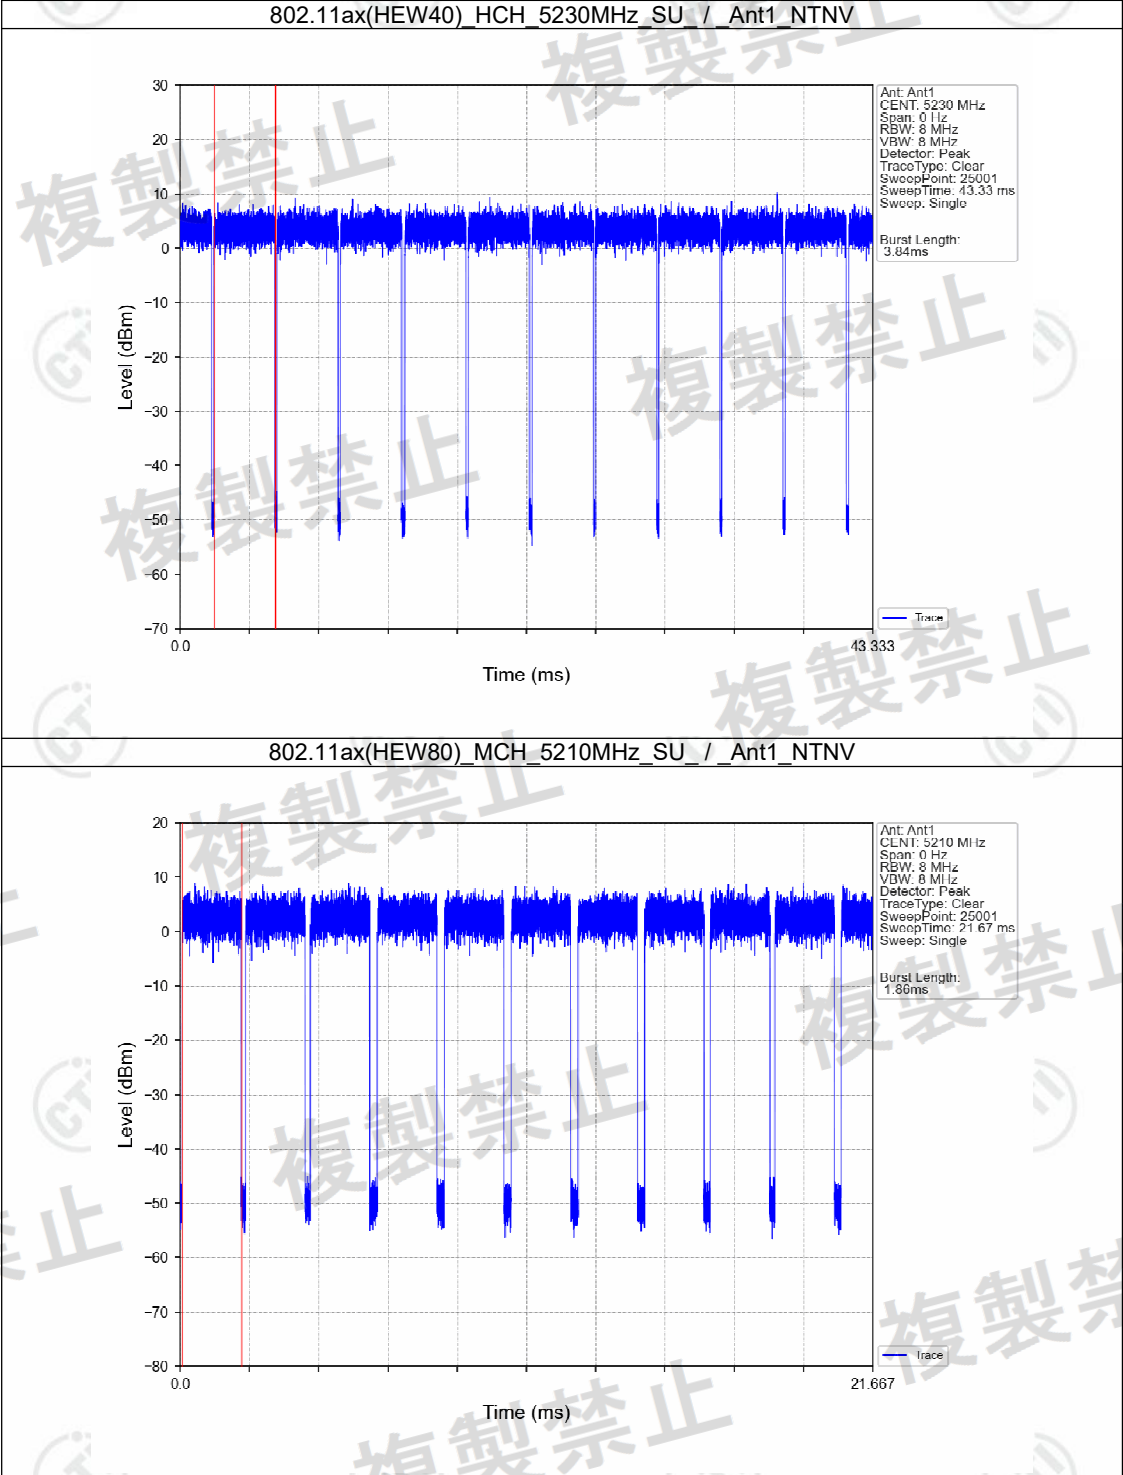

7. Spurious Emission Intensity

7.1 Test Result


7.1.1 TxSe_NTNV_SISO


NTNV														
Mode	TX Type	Freq. (MHz)	RU	RU Pos	A N T	Freq. Range		Marker					Limit (uW /MHz)	Verdi ct
						Start (MHz)	Stop (MHz)	Freq. (MHz)	PK EIRP (dBm /MHz)	PK EIRP (uW /MHz)	AV EIR P (dB m /MH z)	AV EIRP (uW /MHz)		
802.1 1a	SISO	5180	/	/	1	30	5142	3915.5	-37.86	0.164	/	/	2.5	Pass
						5266.7	26000	25903.936	-37.45	0.180	/	/	2.5	Pass
		5200	/	/	1	30	5142	3686.5	-38.32	0.147	/	/	2.5	Pass
						5266.7	26000	25729.085	-37.29	0.187	/	/	2.5	Pass
		5240	/	/	1	30	5142	3791	-41.87	0.065	/	/	2.5	Pass
						5266.7	26000	25923.287	-41.48	0.071	/	/	2.5	Pass
802.1 1n (HT2 0)	SISO	5180	/	/	1	30	5142	5142	-42.56	0.055	/	/	2.5	Pass
						5266.7	26000	25876.982	-41.06	0.078	/	/	2.5	Pass
		5200	/	/	1	30	5142	3793	-41.84	0.065	/	/	2.5	Pass
						5266.7	26000	25812.709	-40.56	0.088	/	/	2.5	Pass
		5240	/	/	1	30	5142	3681	-42.18	0.061	/	/	2.5	Pass
						5266.7	26000	25977.193	-41.33	0.074	/	/	2.5	Pass
802.1 1n (HT4 0)	SISO	5190	/	/	1	30	5141.6	3857.075	-43.06	0.049	/	/	2.5	Pass
						5278.4	26000	25792.093	-40.66	0.086	/	/	2.5	Pass
		5230	/	/	1	30	5141.6	3814.574	-43.10	0.049	/	/	2.5	Pass
						5278.4	26000	23726.15	-40.93	0.081	/	/	2.5	Pass
802.1 1ac (VHT 20)	SISO	5180	/	/	1	30	5142	3714.5	-42.81	0.052	/	/	2.5	Pass
						5266.7	26000	25756.729	-41.43	0.072	/	/	2.5	Pass
		5200	/	/	1	30	5142	3652	-42.82	0.052	/	/	2.5	Pass
						5266.7	26000	25959.916	-40.77	0.084	/	/	2.5	Pass
		5240	/	/	1	30	5142	3778.5	-48.34	0.015	/	/	2.5	Pass
						5266.7	26000	25530.736	-46.53	0.022	/	/	2.5	Pass
802.1 1ac	SISO	5190	/	/	1	30	5141.6	5137.1	-41.21	0.076	/	/	2.5	Pass
						5278.4	26000	25877.7	-41.05	0.079	/	/	2.5	Pass


(VHT 40)		5230	/	/	1	30	5141.6	43 3646.57 1	-48.73	0.013	/	/	2.5	Pass
						5278.4	26000	5281.85 4	-45.40	0.029	/	/	2.5	Pass
802.1 1ac (VHT 80)	SISO	5210	/	/	1	30	5123.2	5105.69 9	-39.75	0.106	/	/	2.5	Pass
						5296.7	26000	5329.13 5	-40.39	0.091	/	/	2.5	Pass
802.1 1ax (HE W20)	SISO	5180	SU	/	1	30	5142	5140	-41.94	0.064	/	/	2.5	Pass
						5266.7	26000	25960.6 07	-40.43	0.091	/	/	2.5	Pass
		5200	SU	/	1	30	5142	3891	-42.60	0.055	/	/	2.5	Pass
						5266.7	26000	25873.5 27	-41.25	0.075	/	/	2.5	Pass
		5240	SU	/	1	30	5142	3716.5	-48.85	0.013	/	/	2.5	Pass
						5266.7	26000	5268.08 2	-45.93	0.026	/	/	2.5	Pass
802.1 1ax (HE W40)	SISO	5190	SU	/	1	30	5141.6	5137.1	-41.06	0.078	/	/	2.5	Pass
						5278.4	26000	25948.1 96	-41.03	0.079	/	/	2.5	Pass
		5230	SU	/	1	30	5141.6	3706.07 2	-48.26	0.015	/	/	2.5	Pass
						5278.4	26000	23944.4 17	-47.06	0.020	/	/	2.5	Pass
802.1 1ax (HE W80)	SISO	5210	SU	/	1	30	5123.2	5093.69 9	-41.16	0.077	/	/	2.5	Pass
						5296.7	26000	5298.08	-40.86	0.082	/	/	2.5	Pass


7.2 Test Graph


7.2.1 TxSe_NTNV_SISO

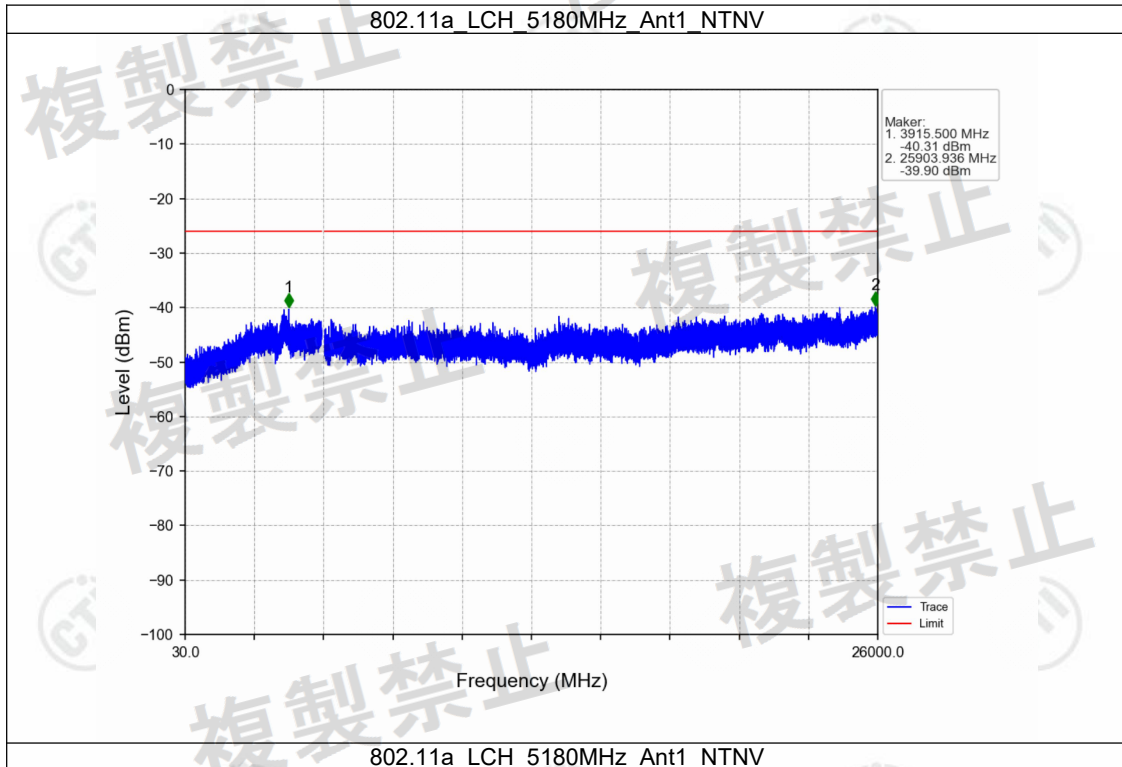


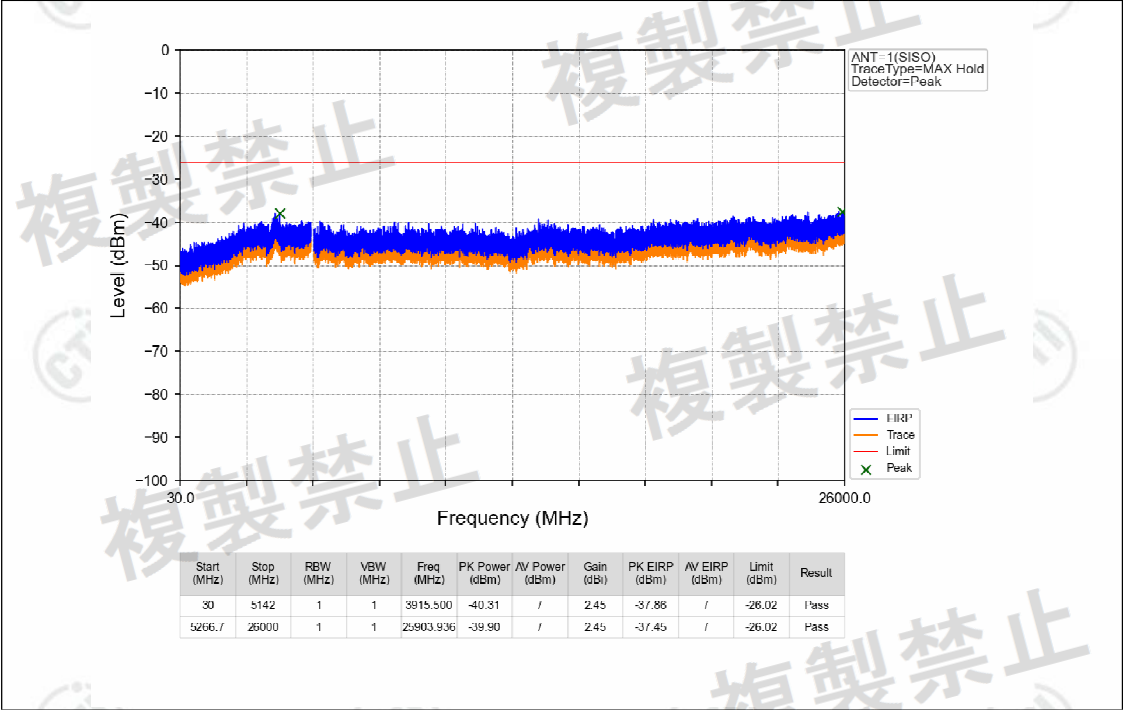


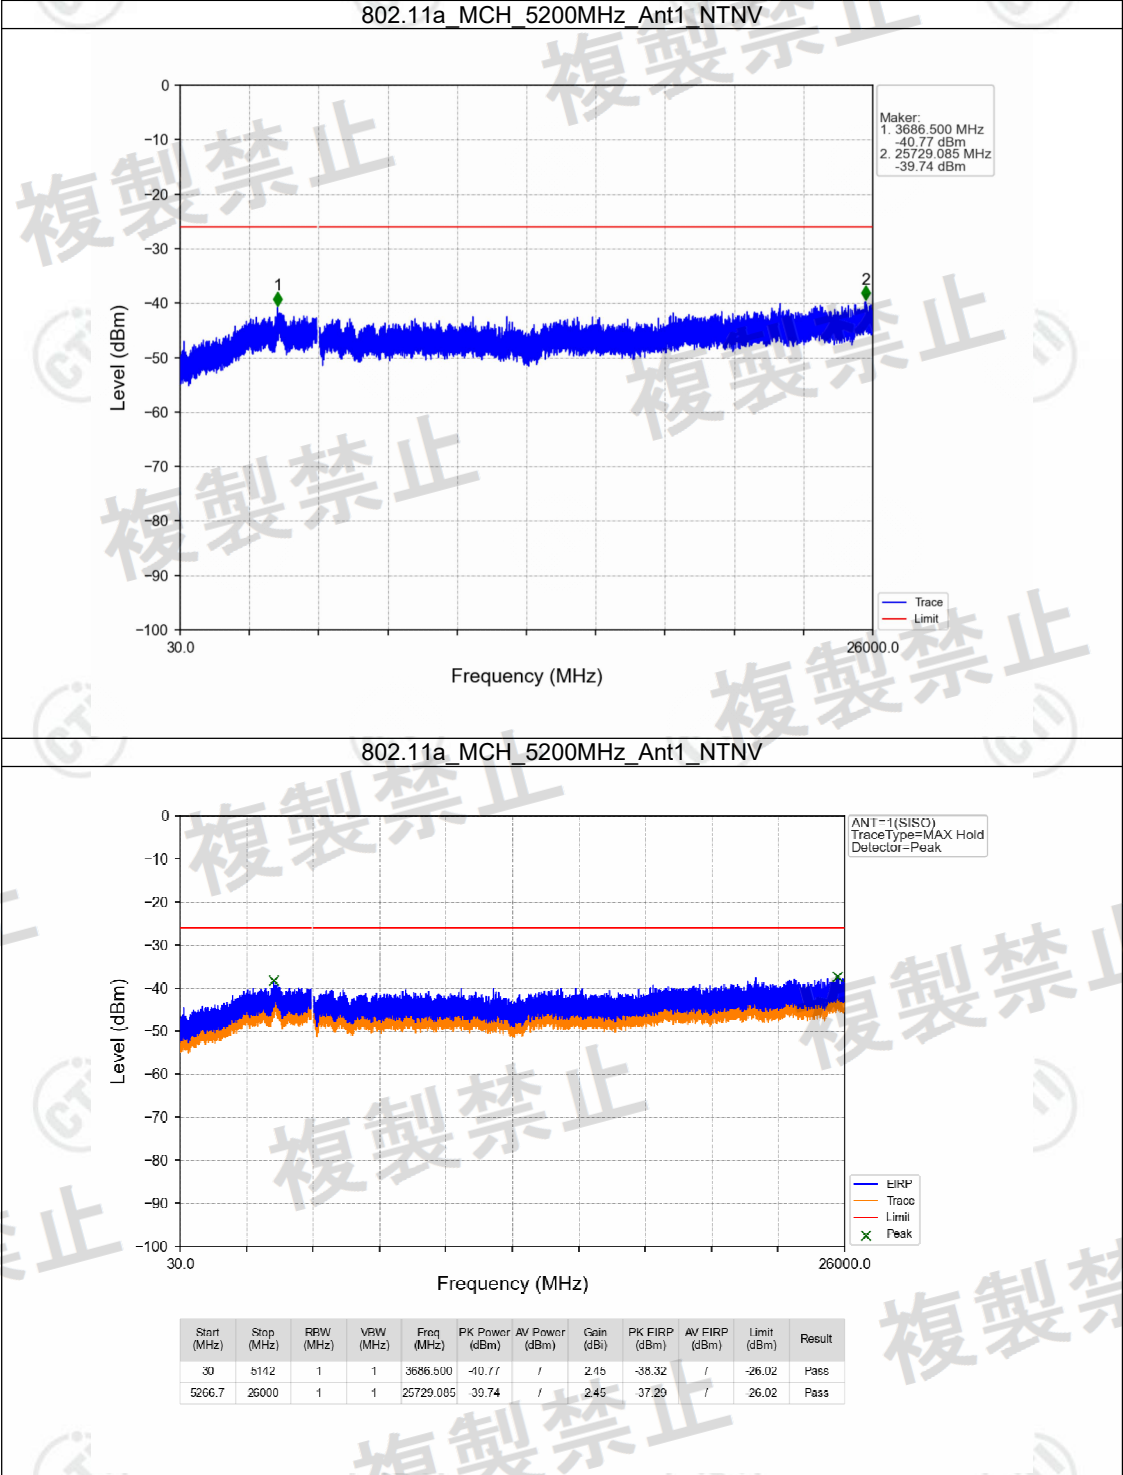


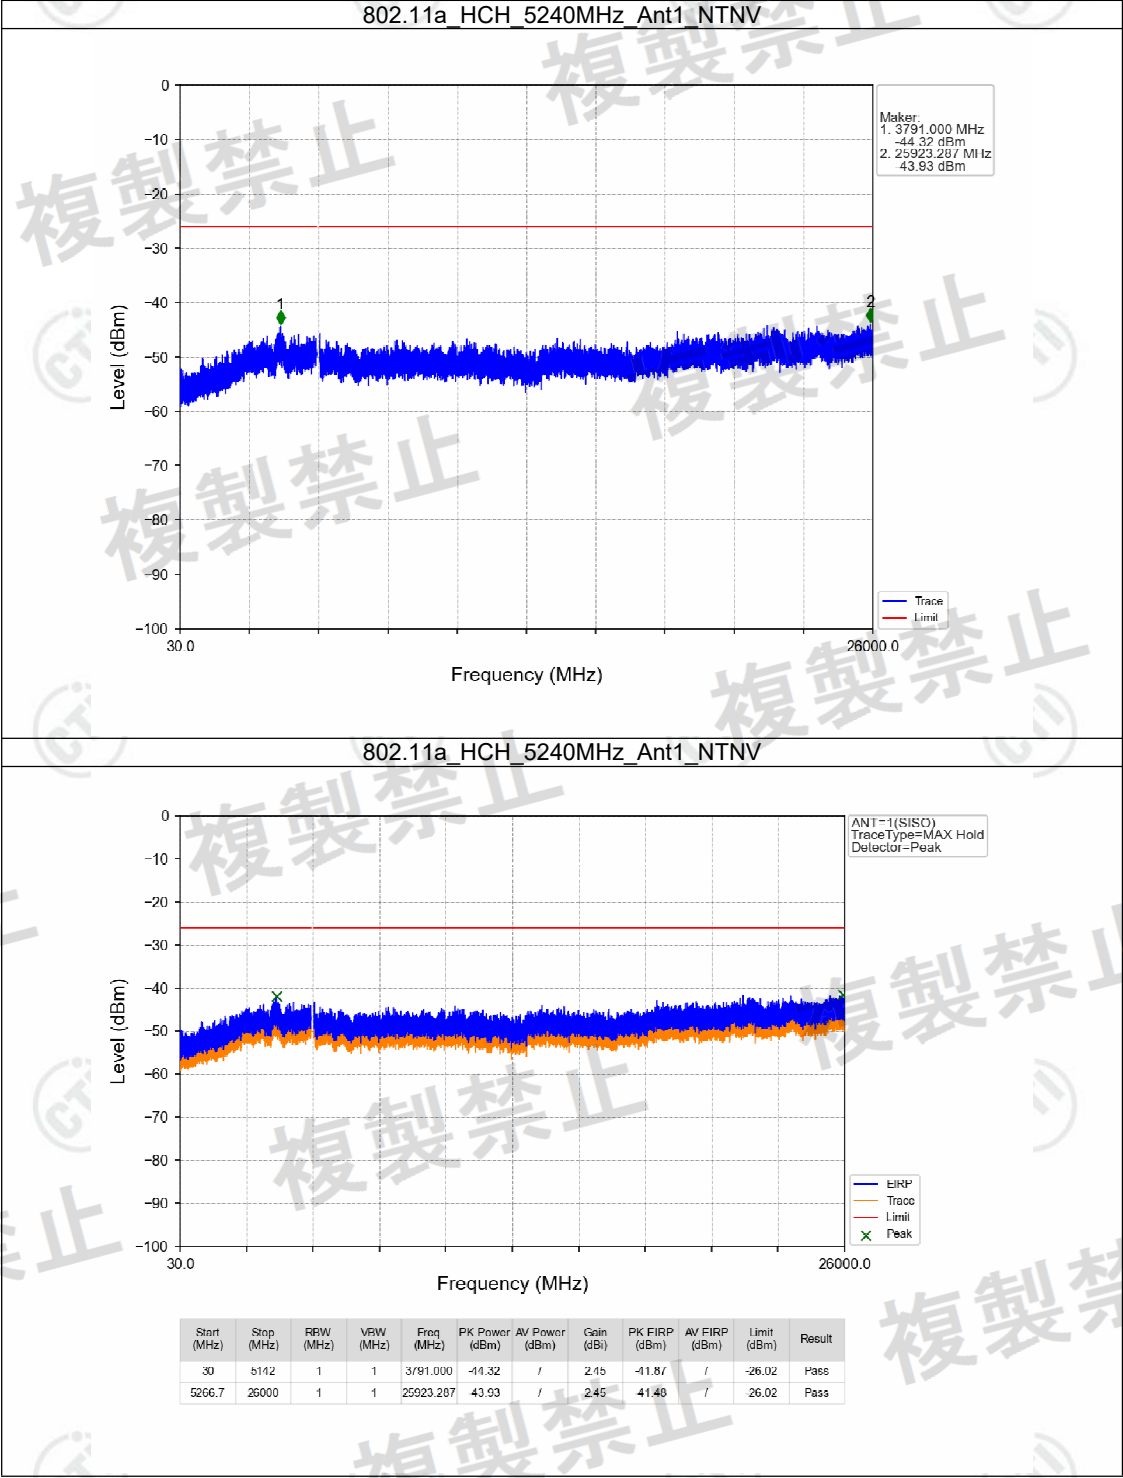


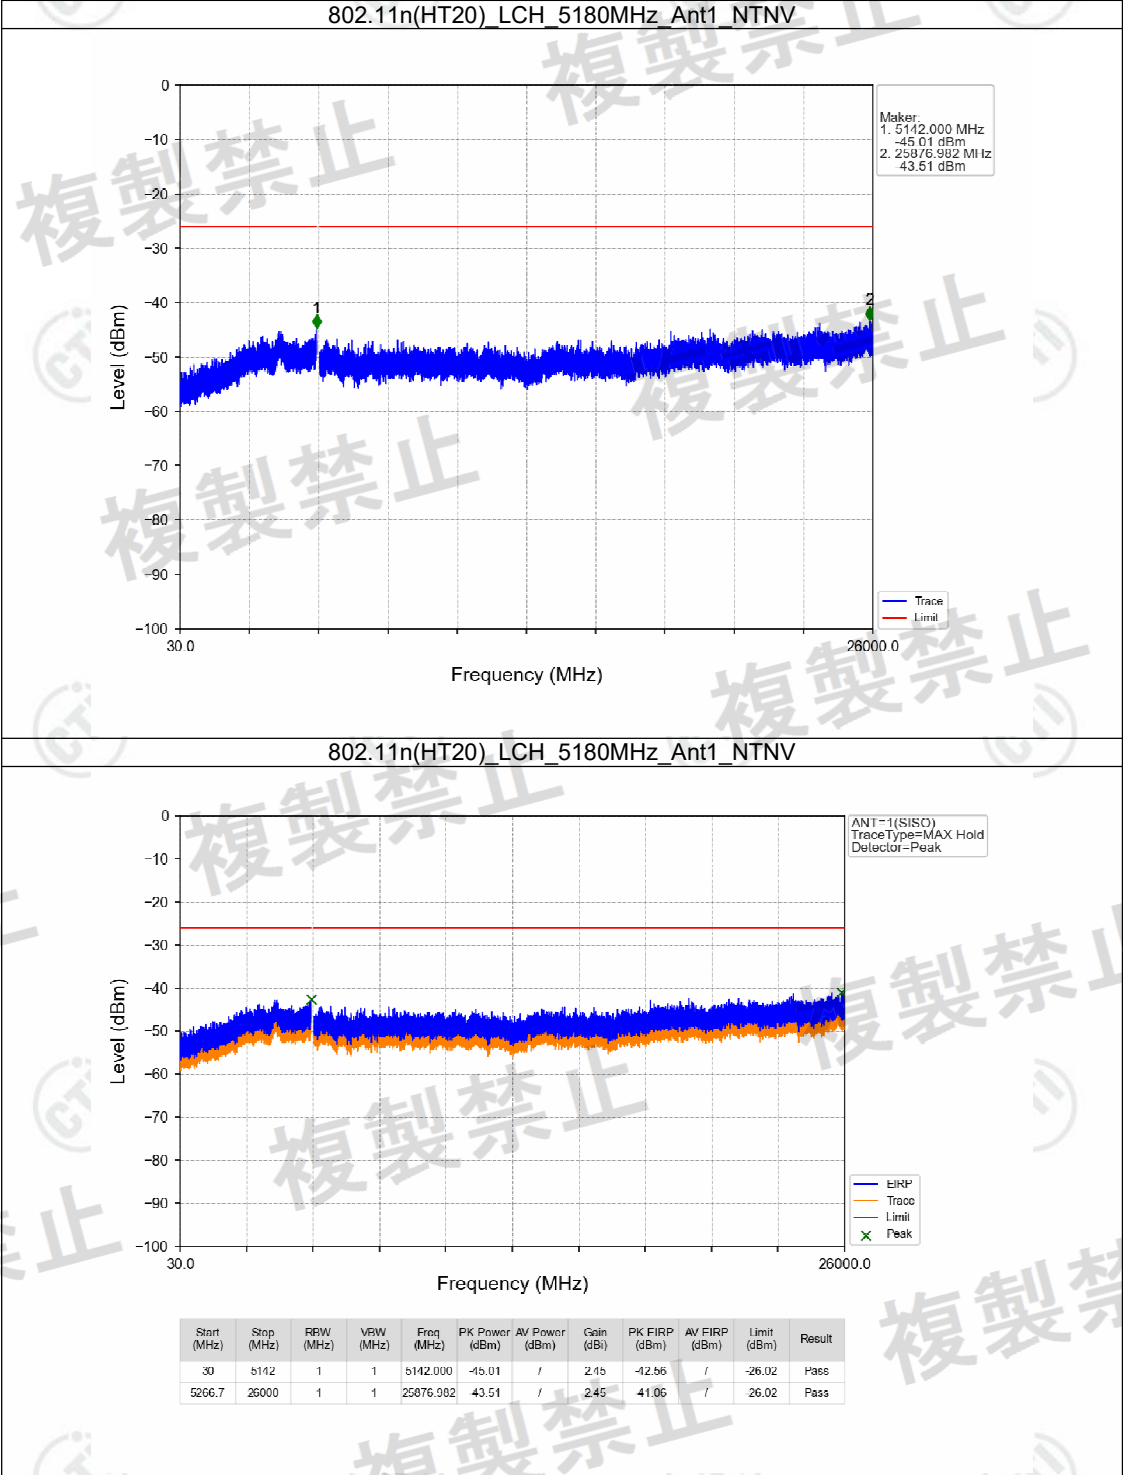


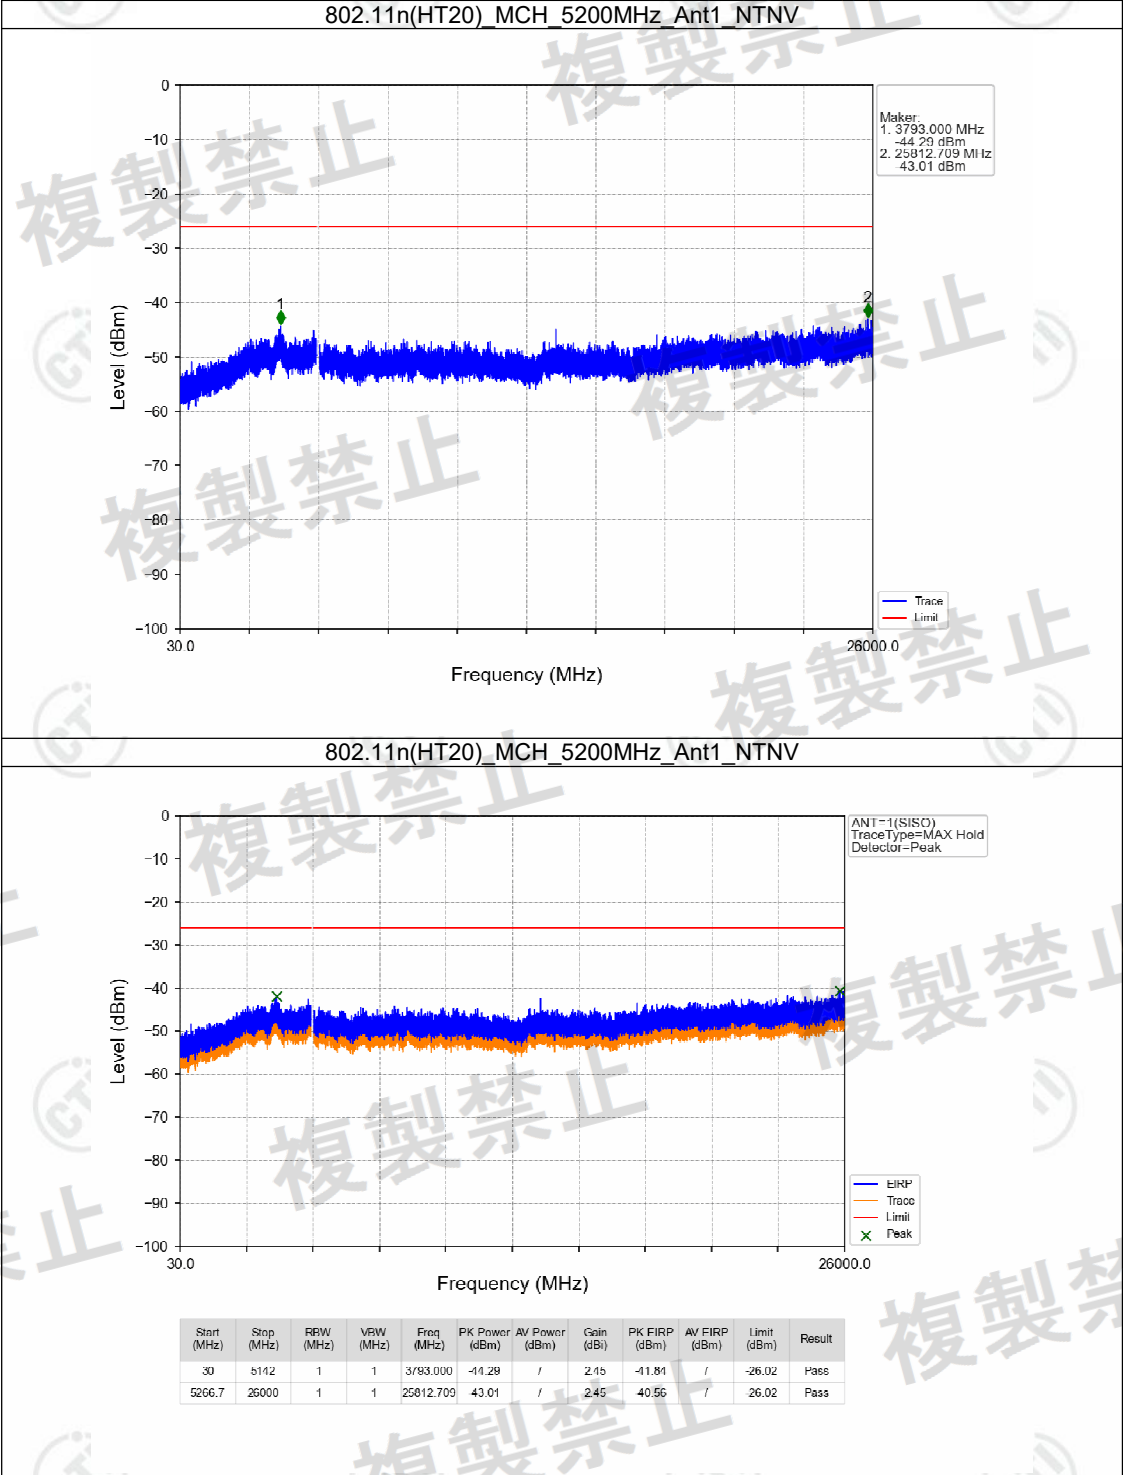


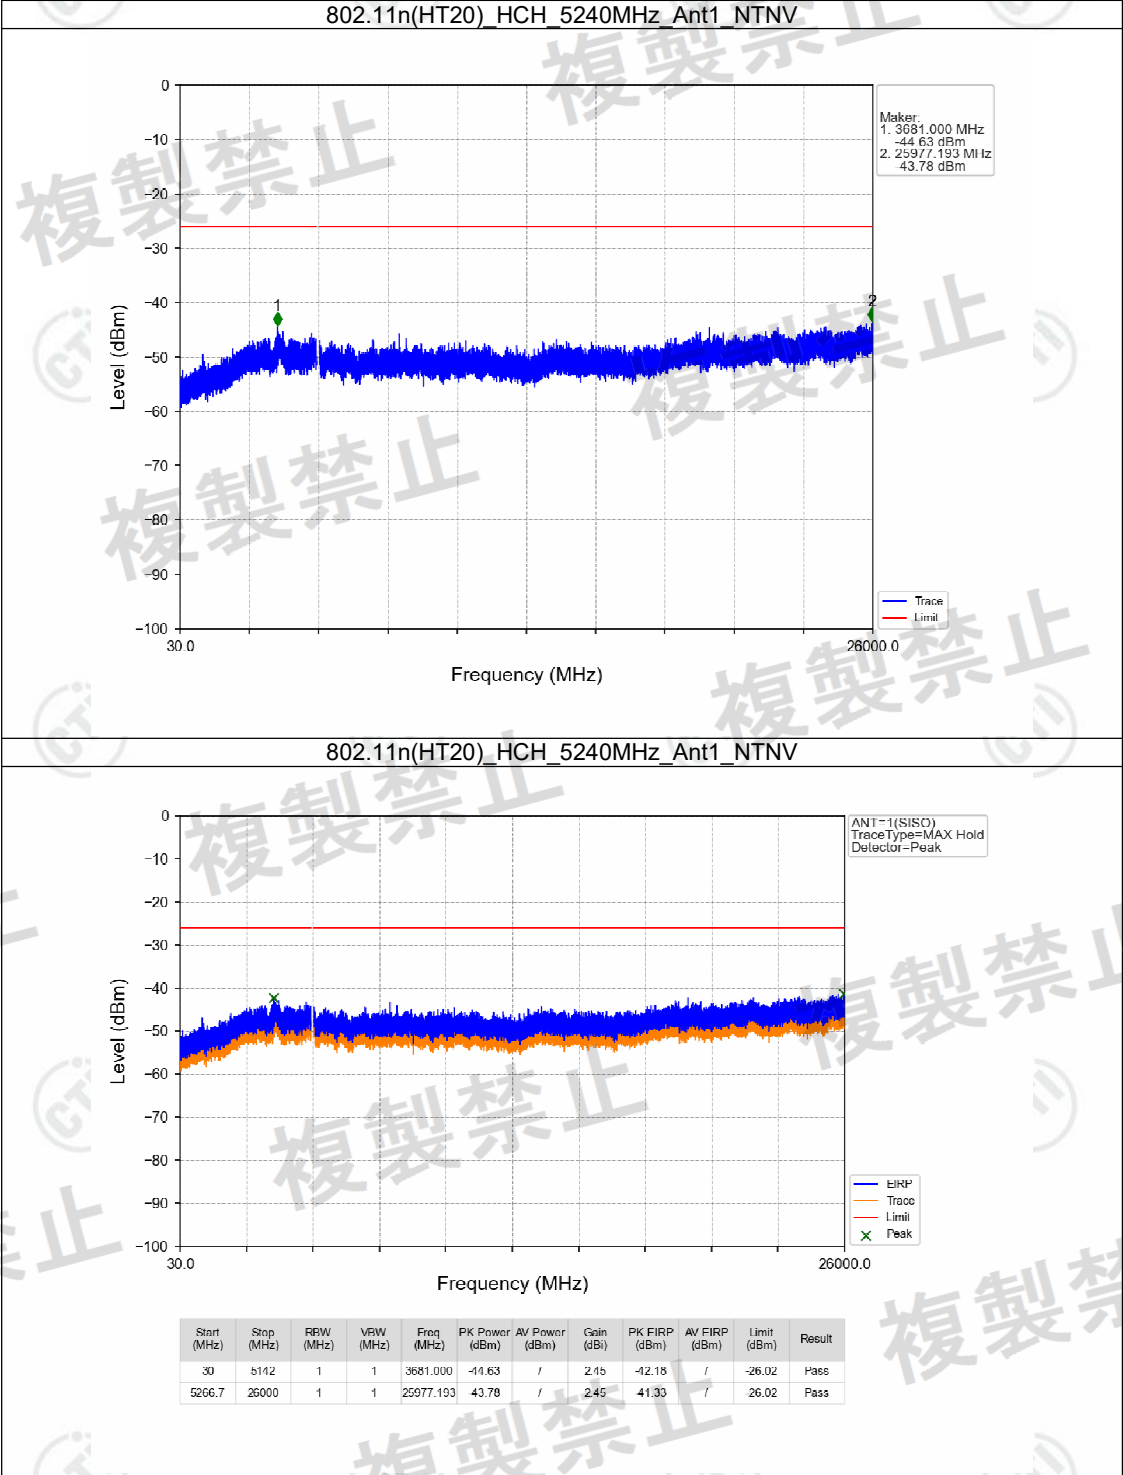


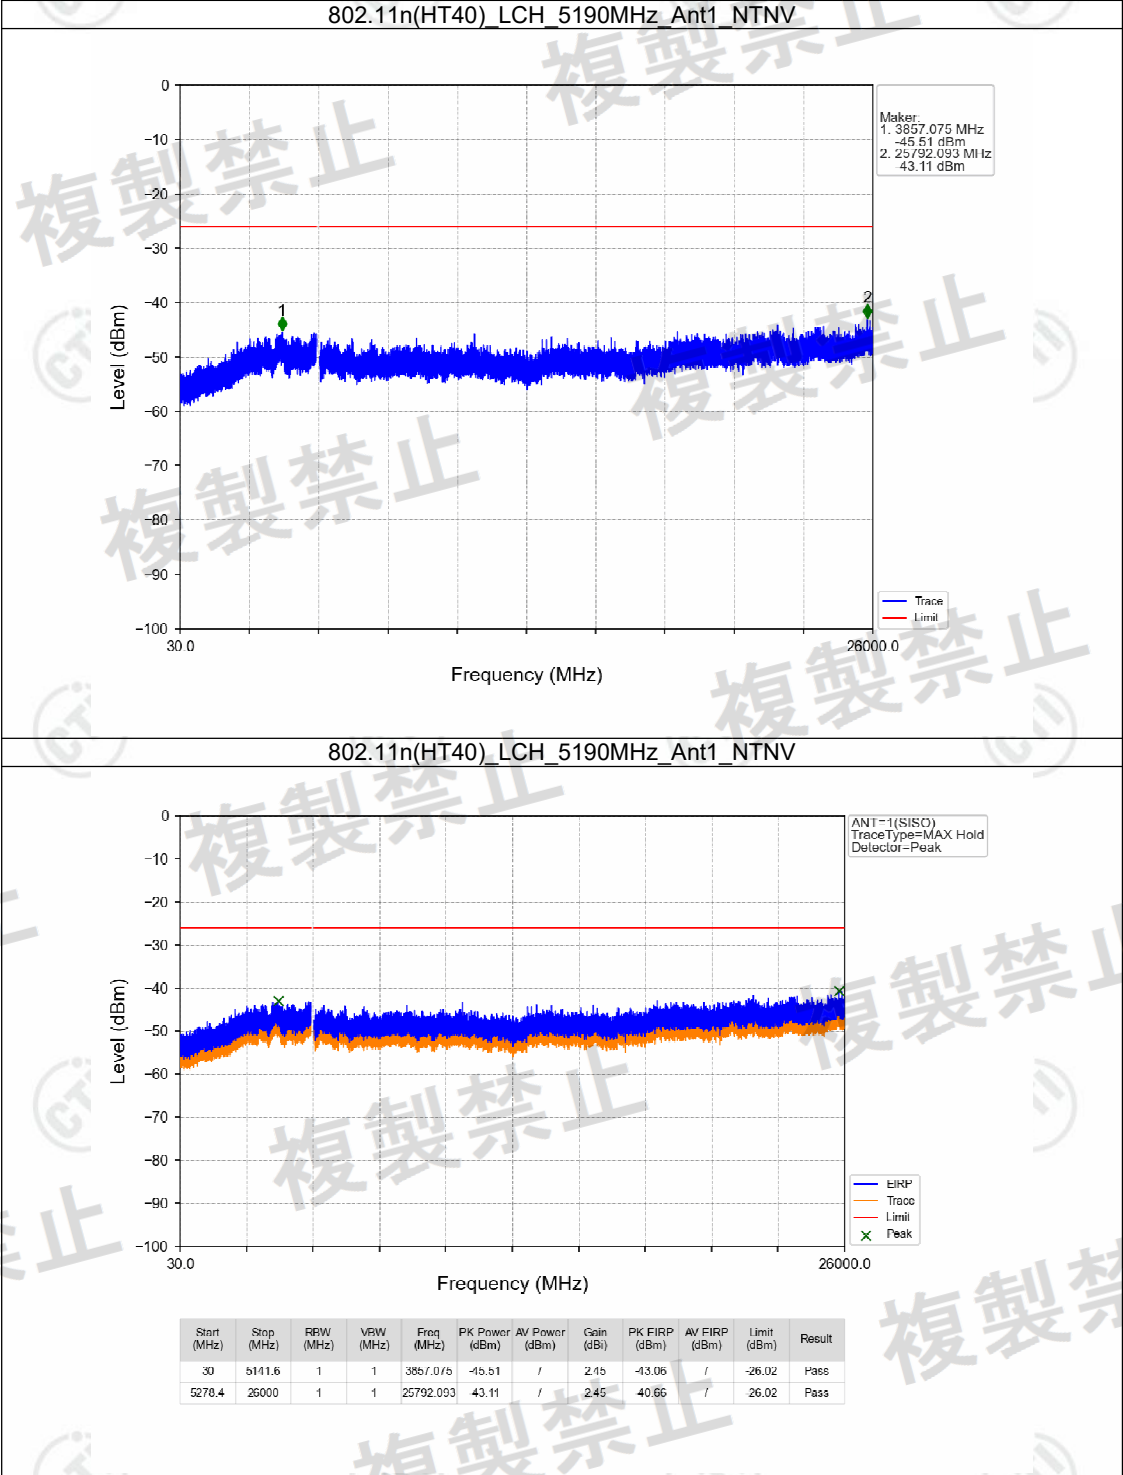


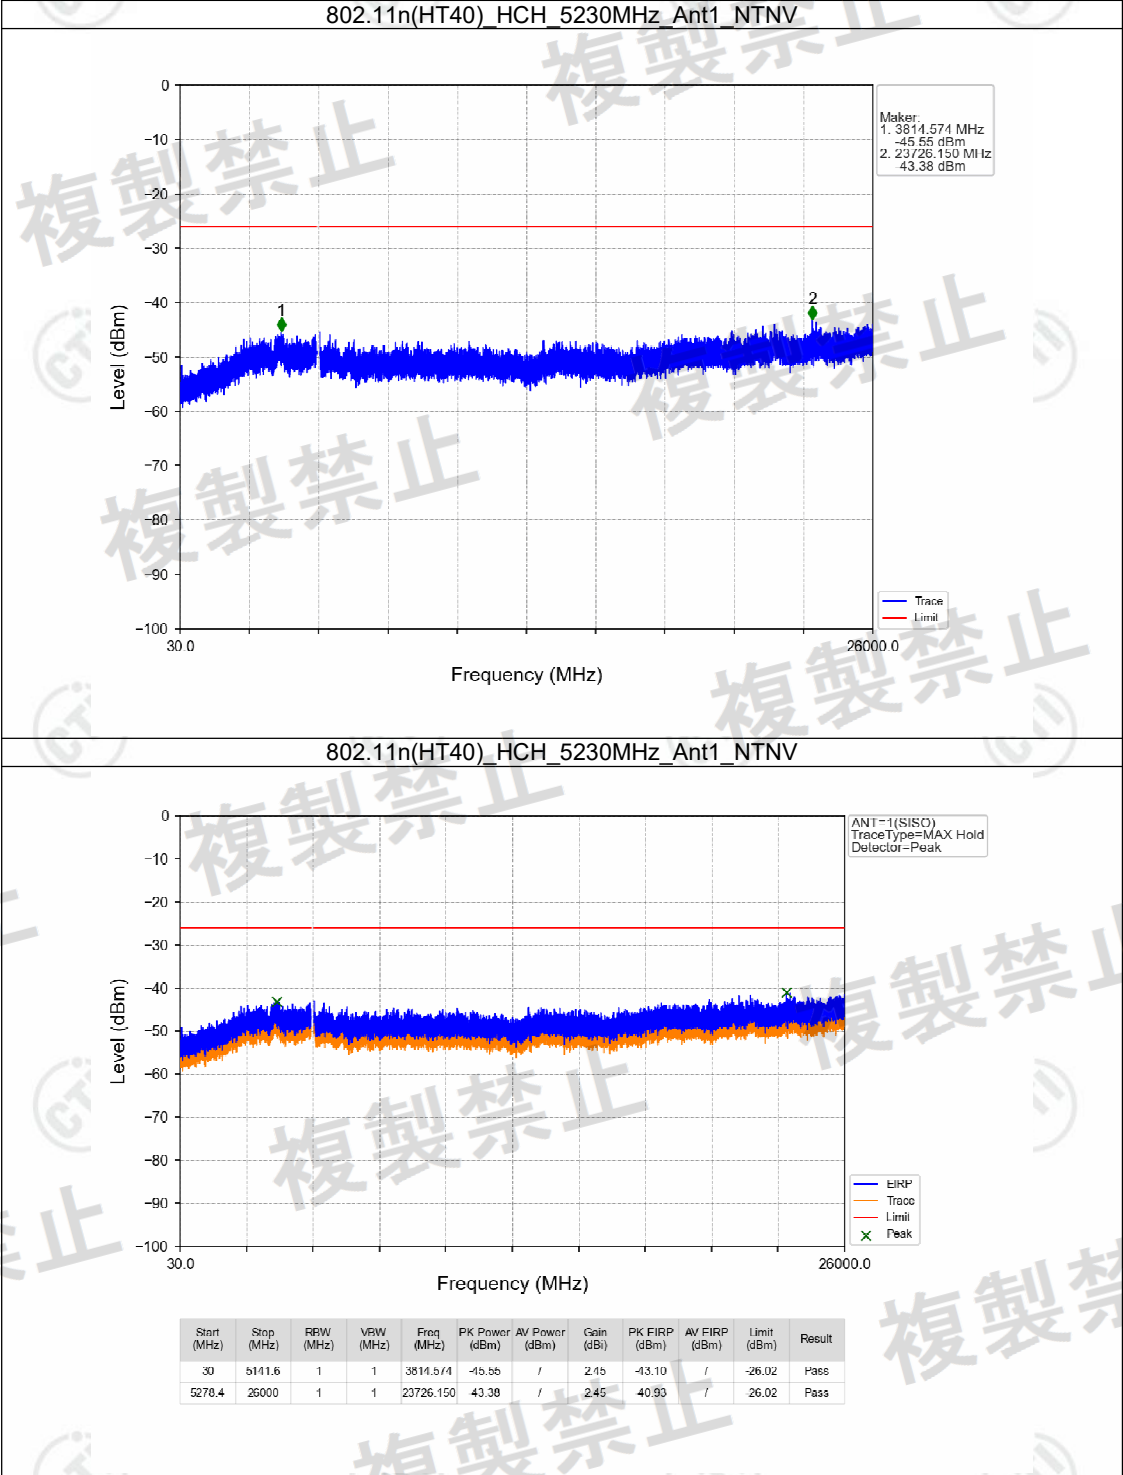


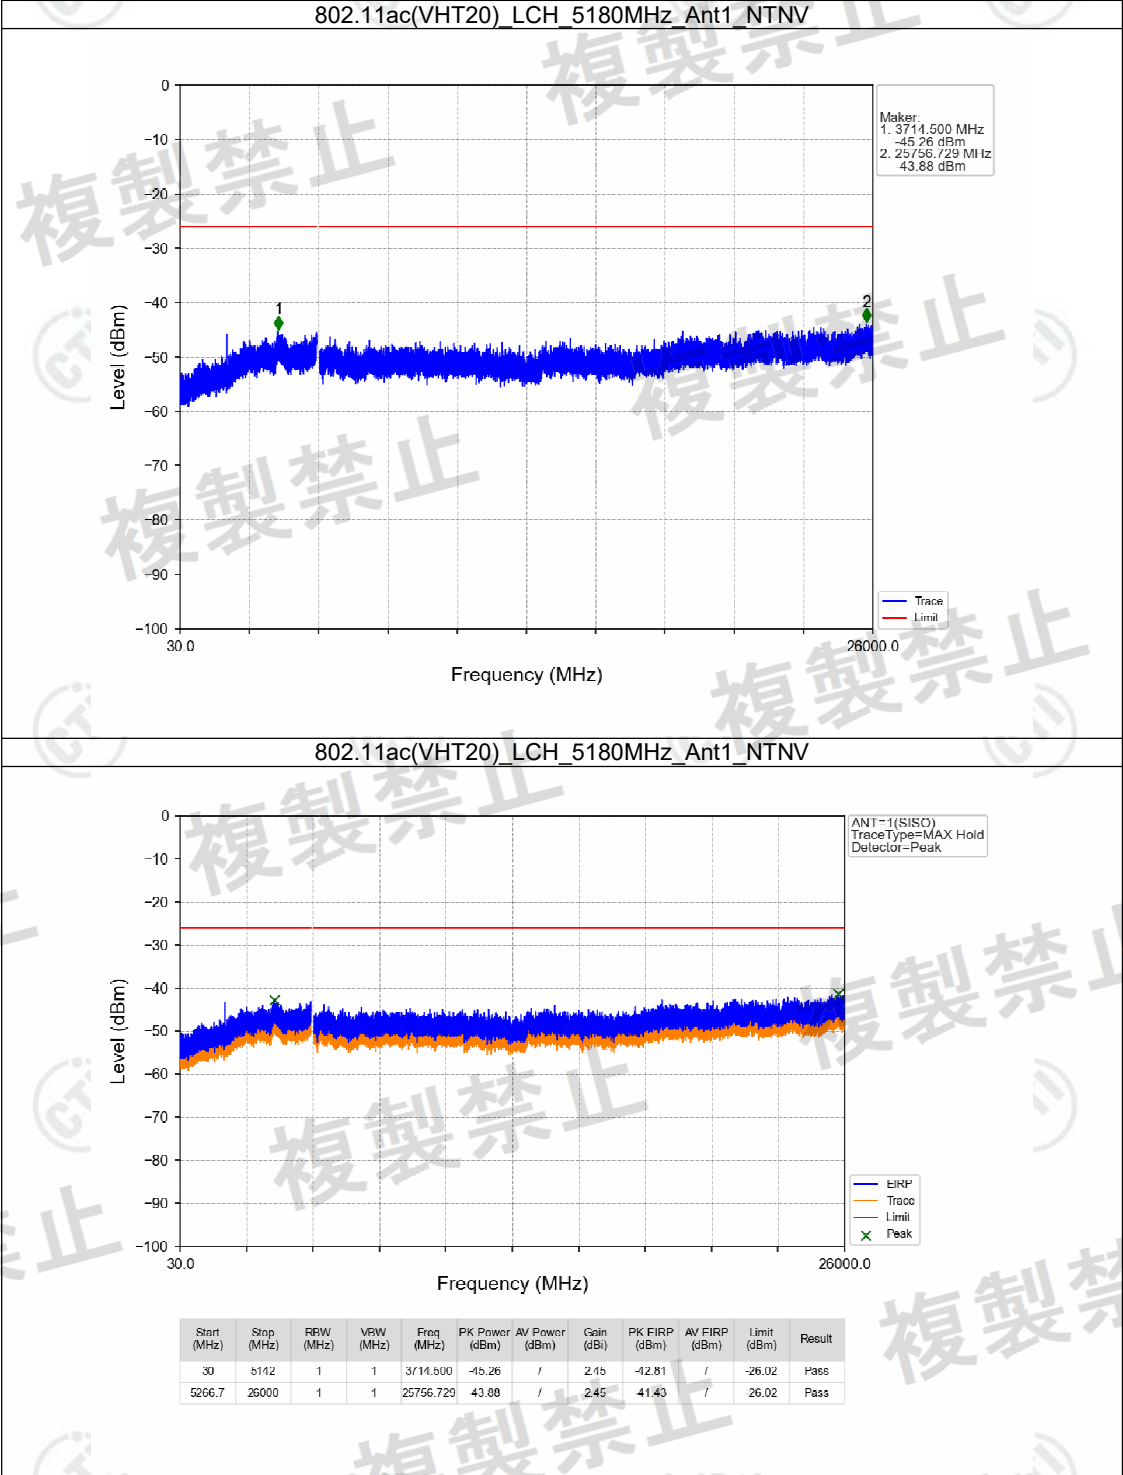


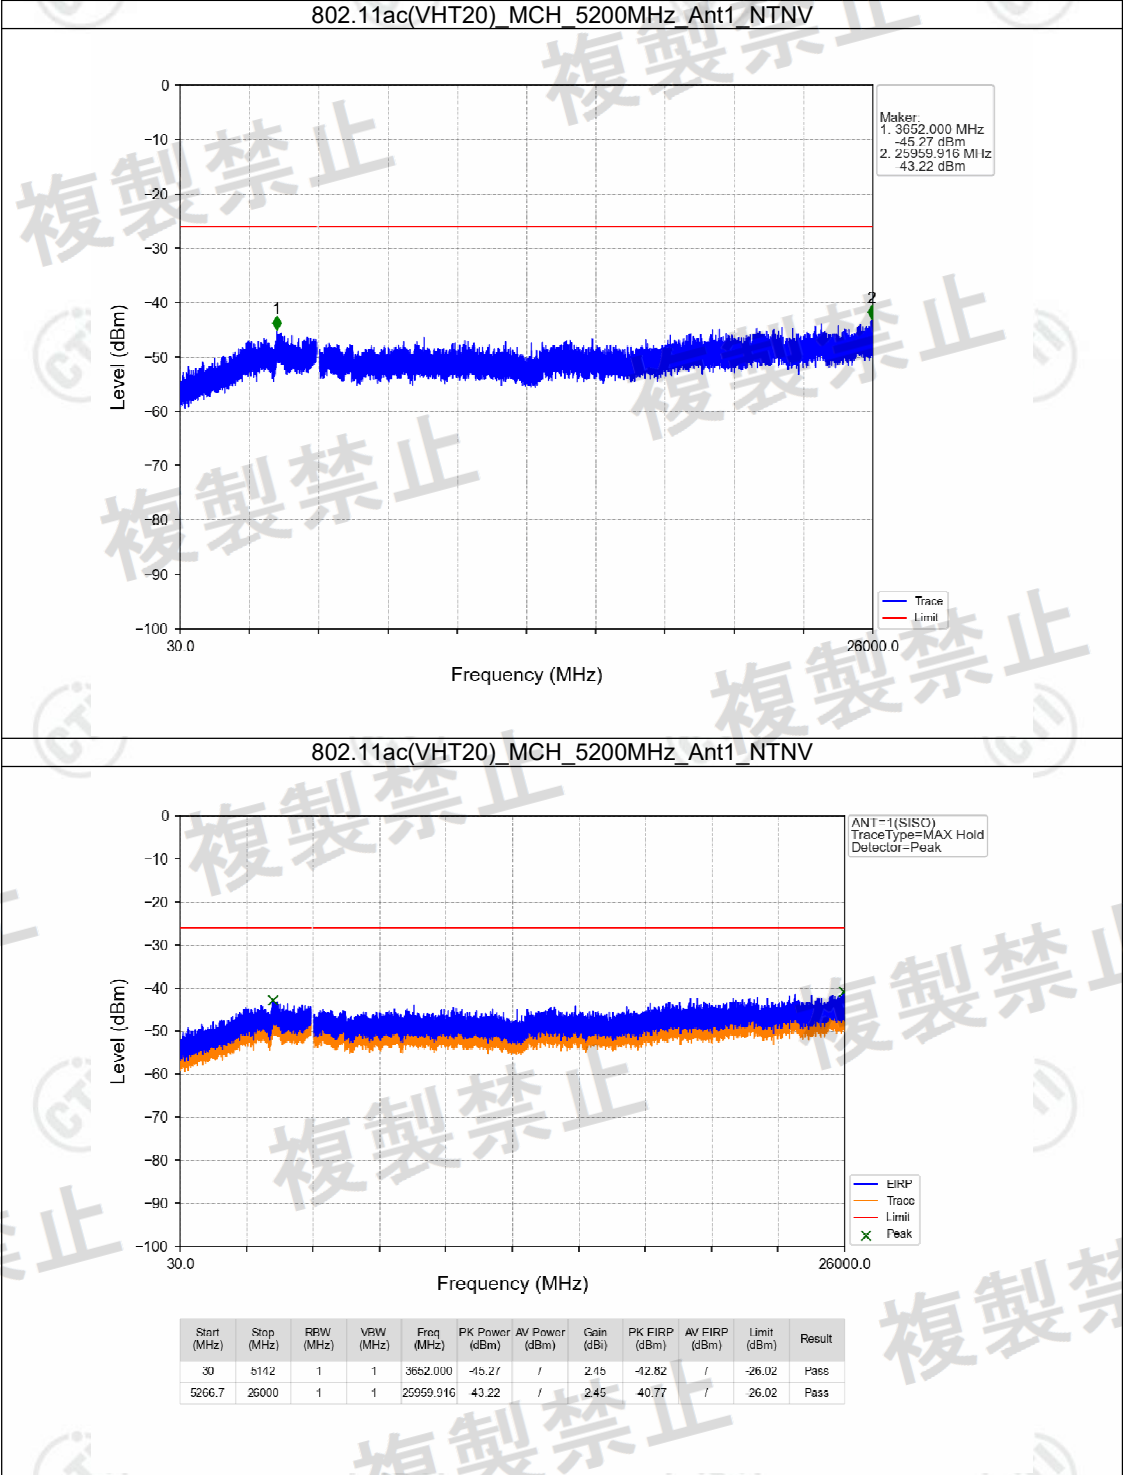


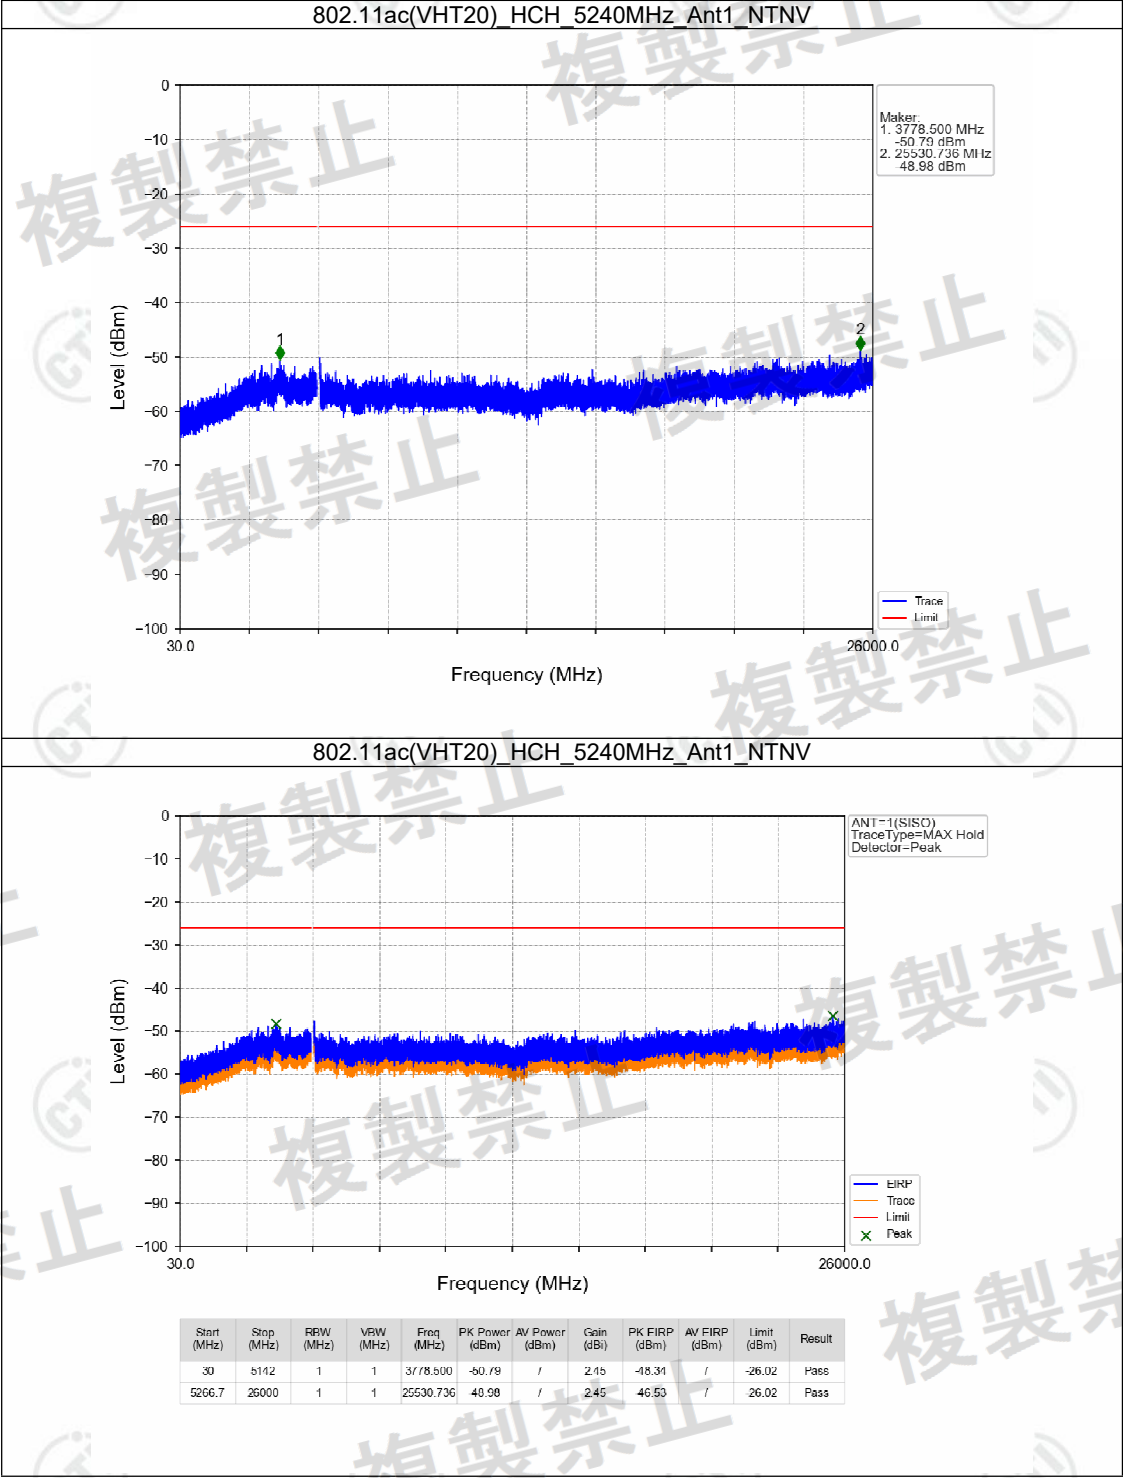


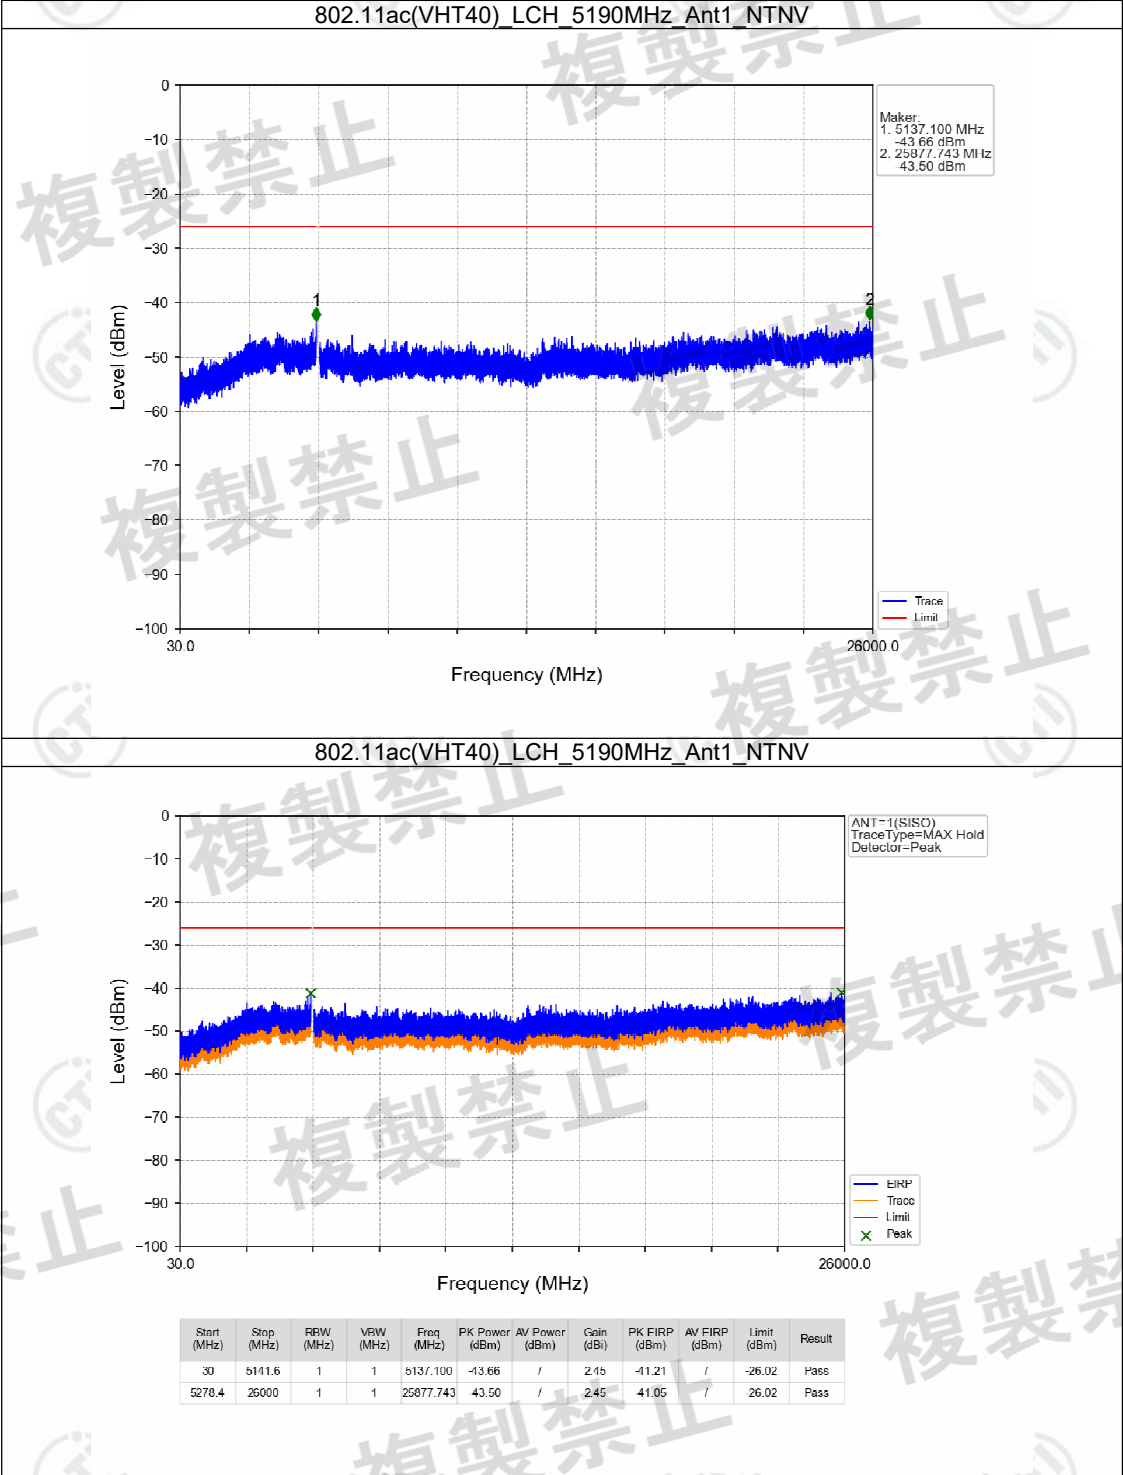


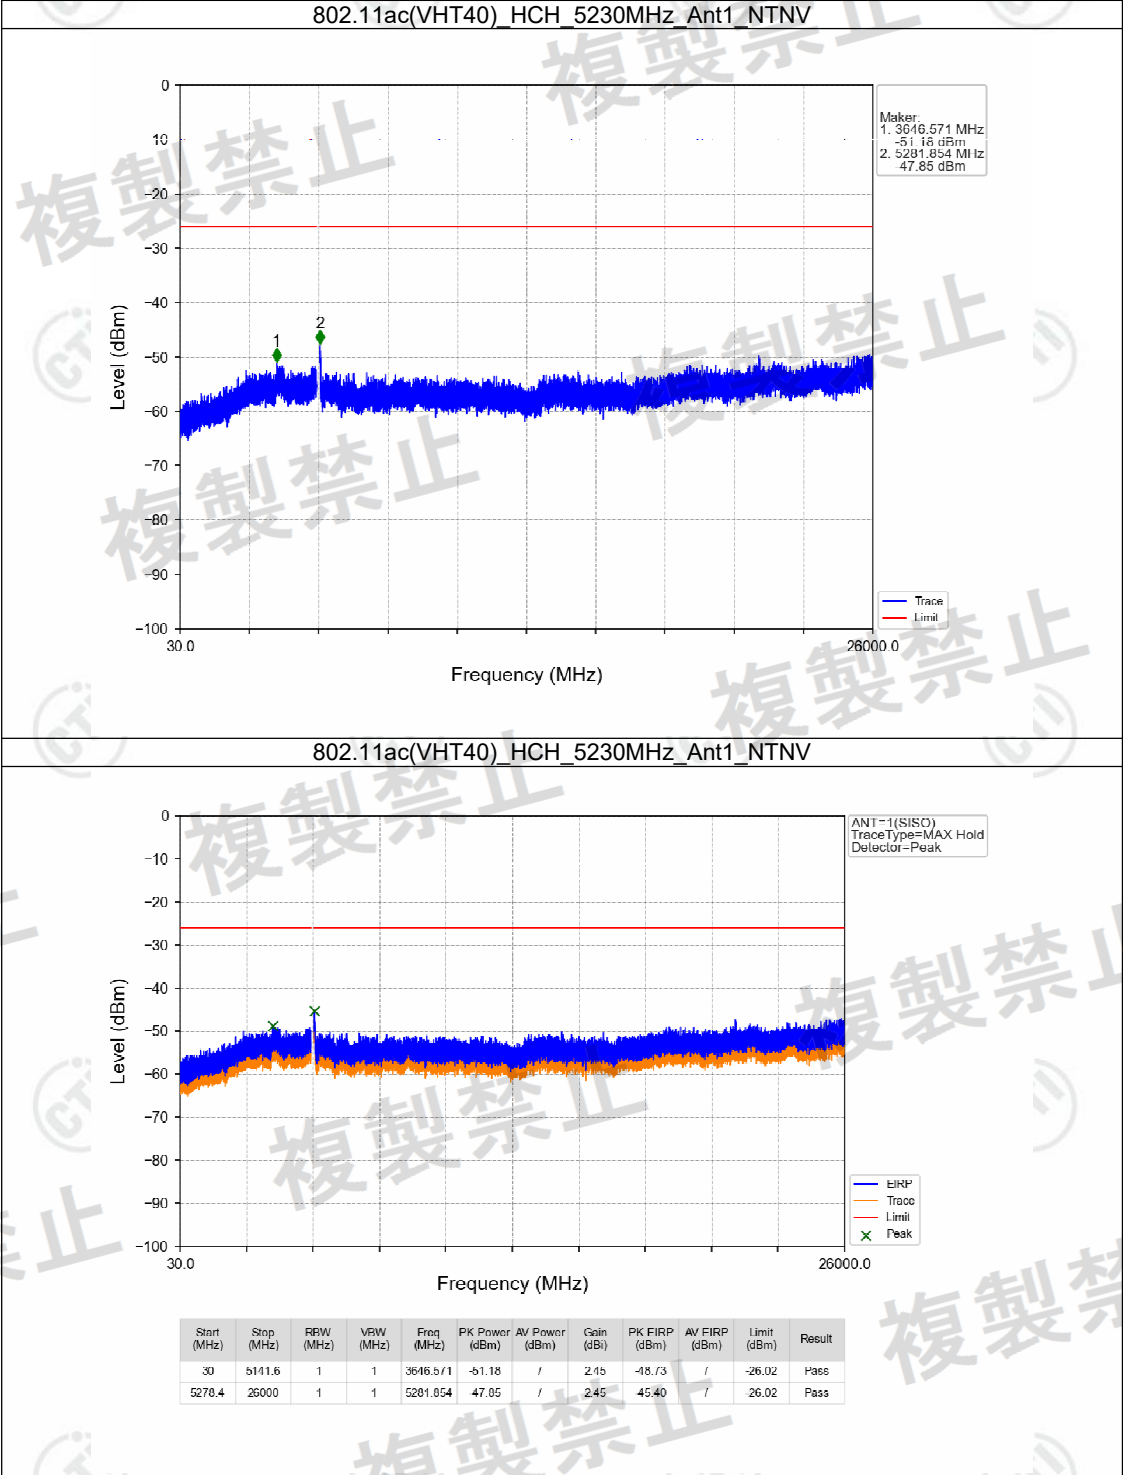


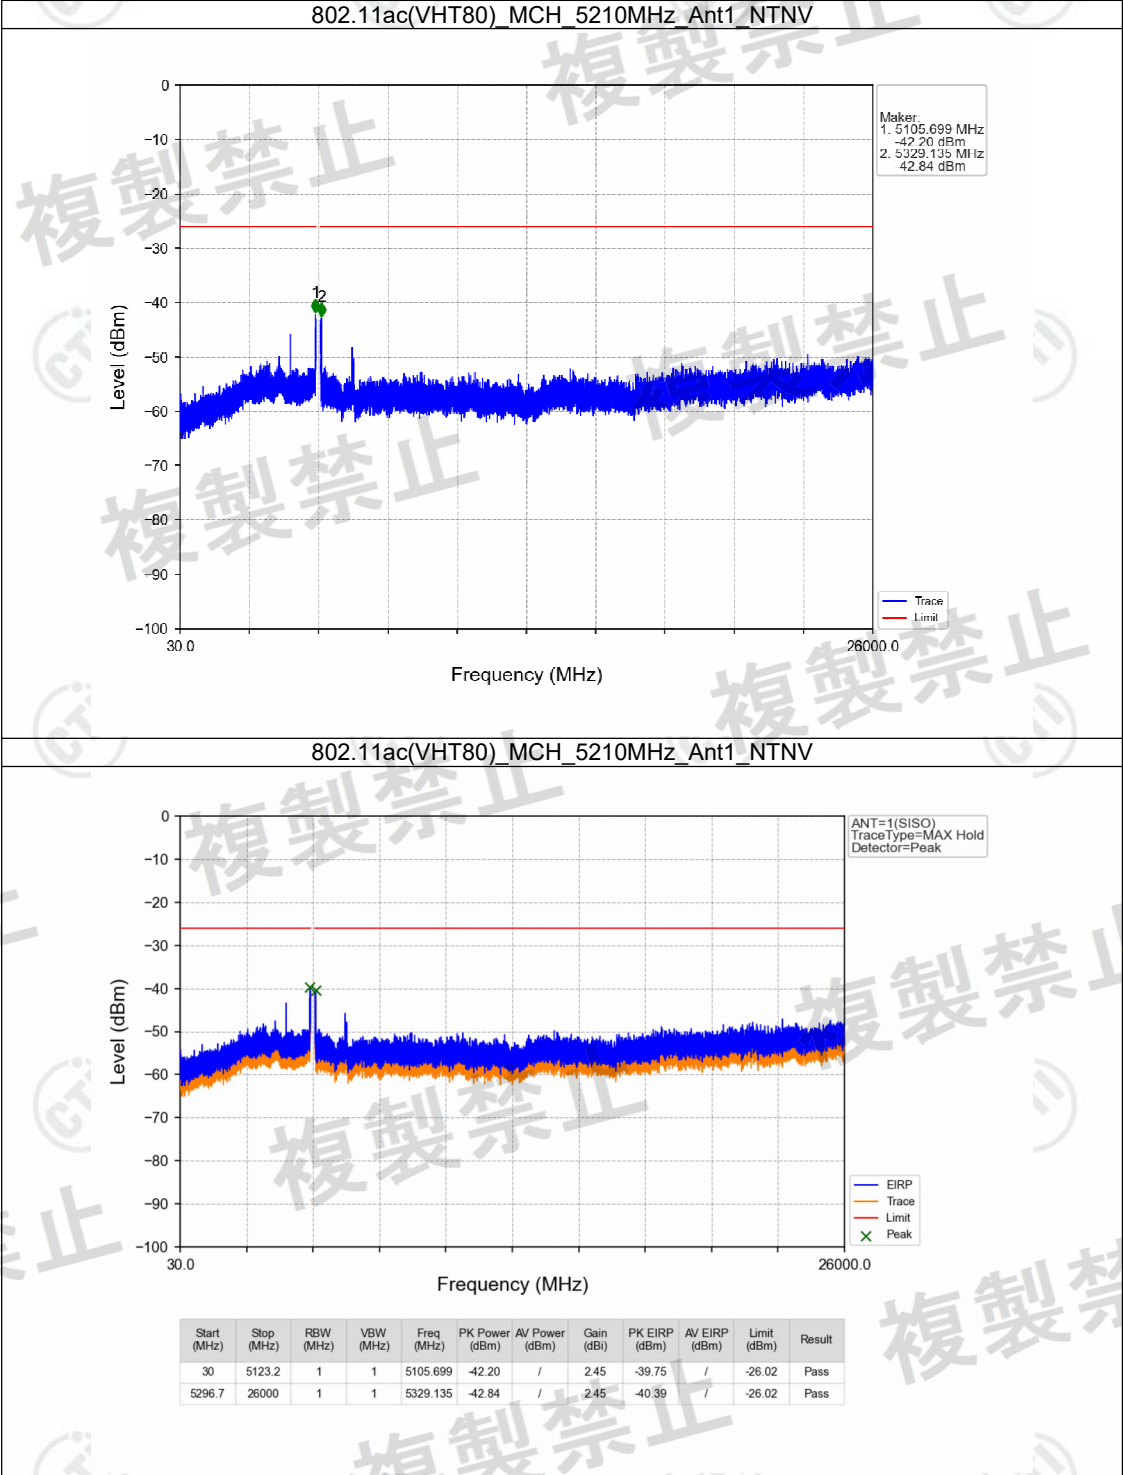


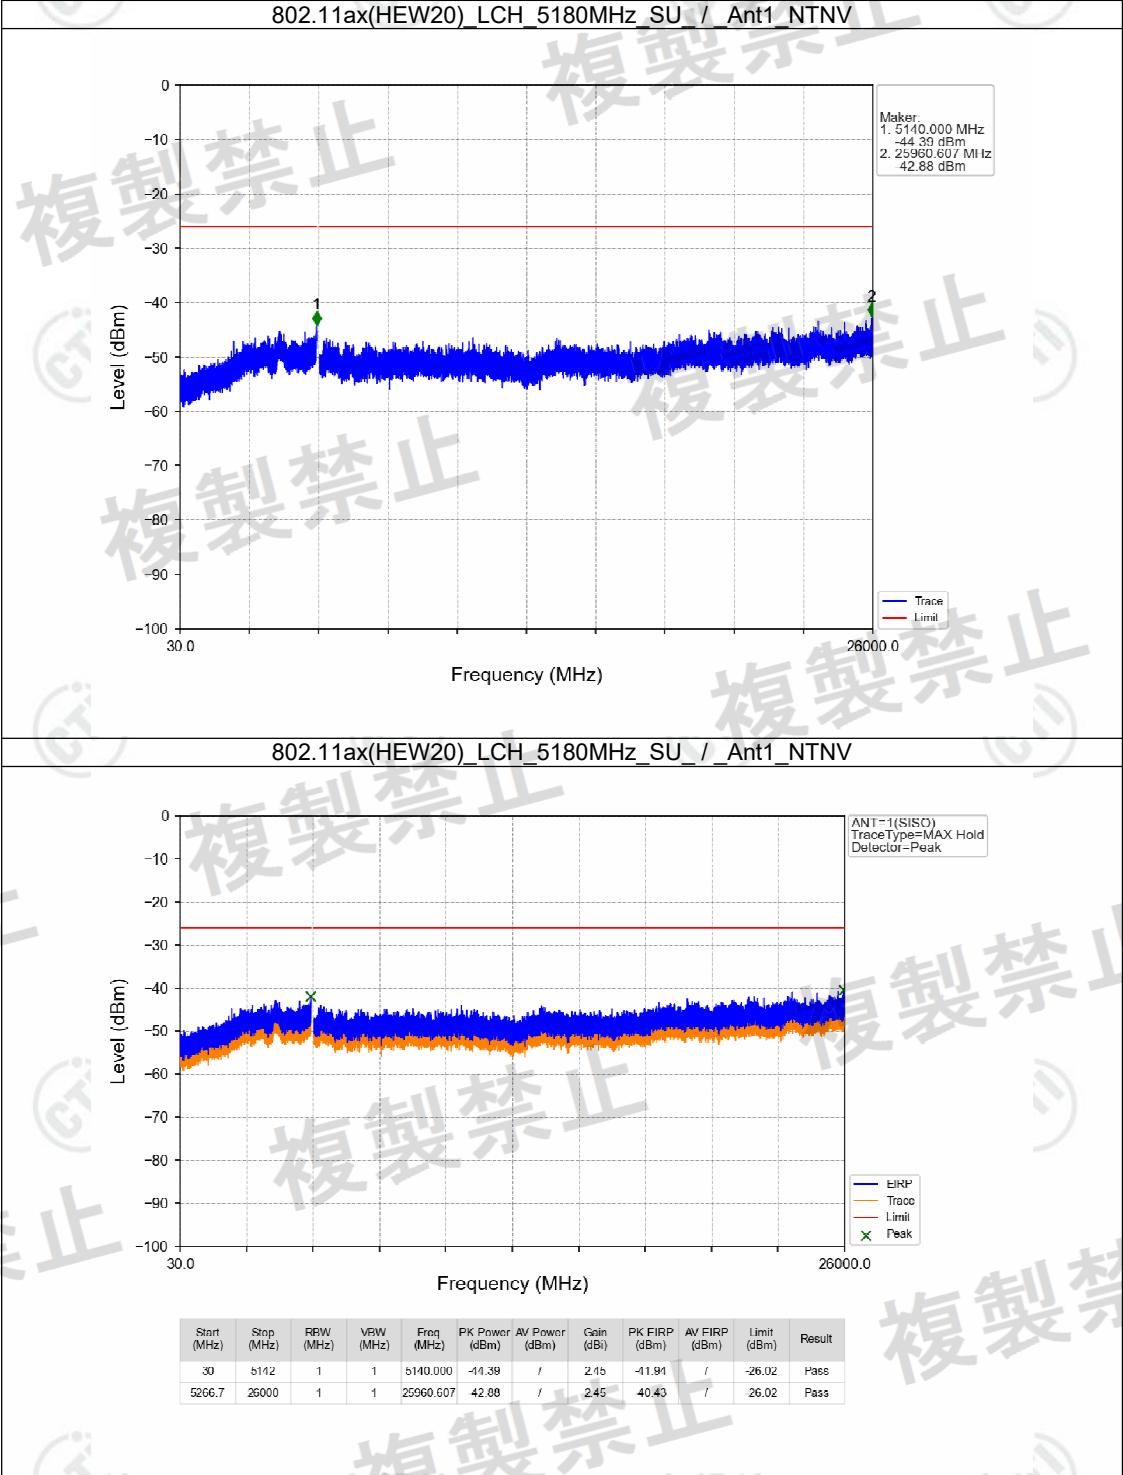


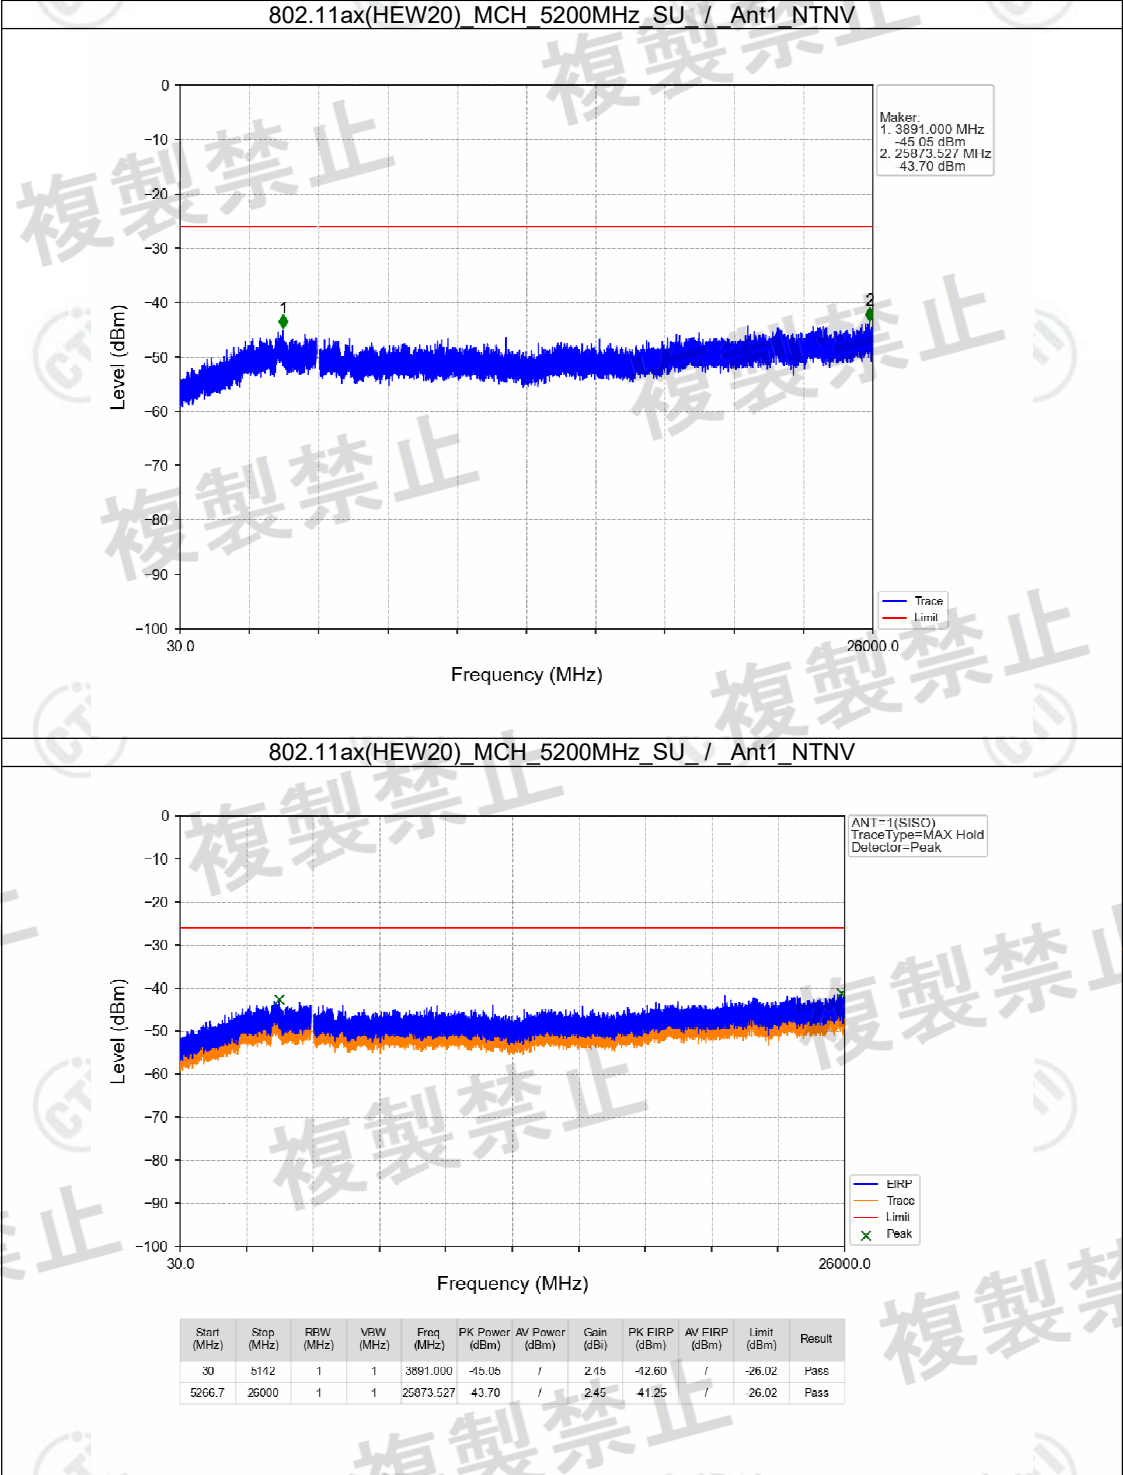

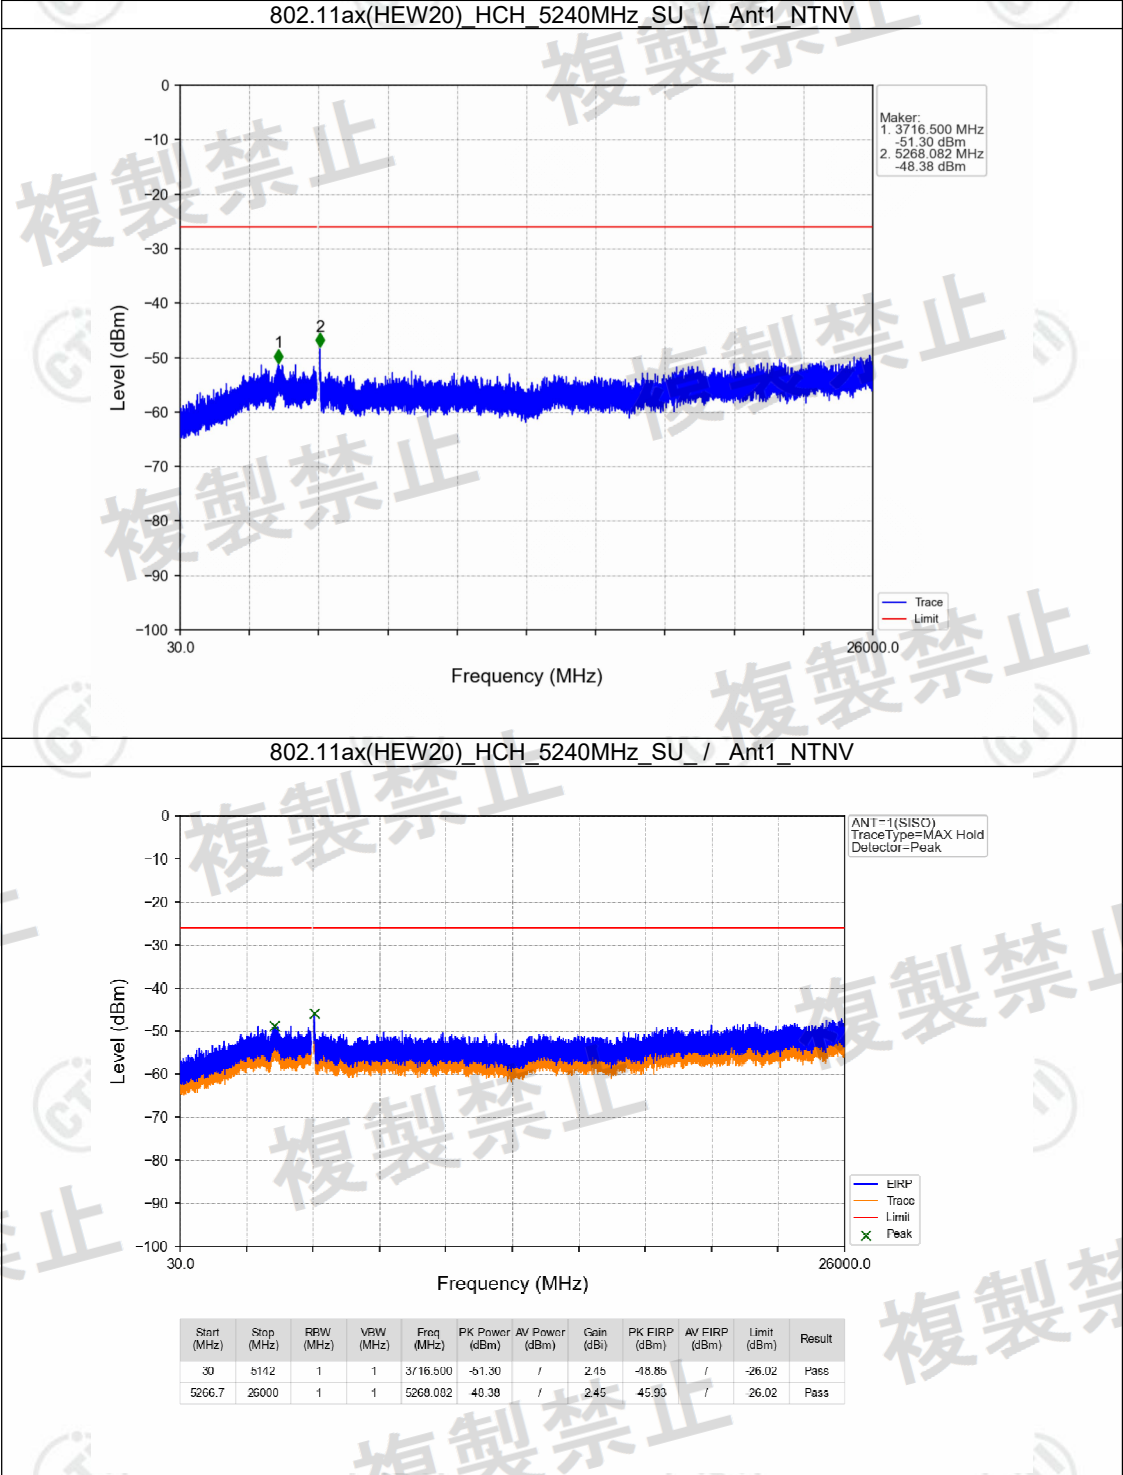

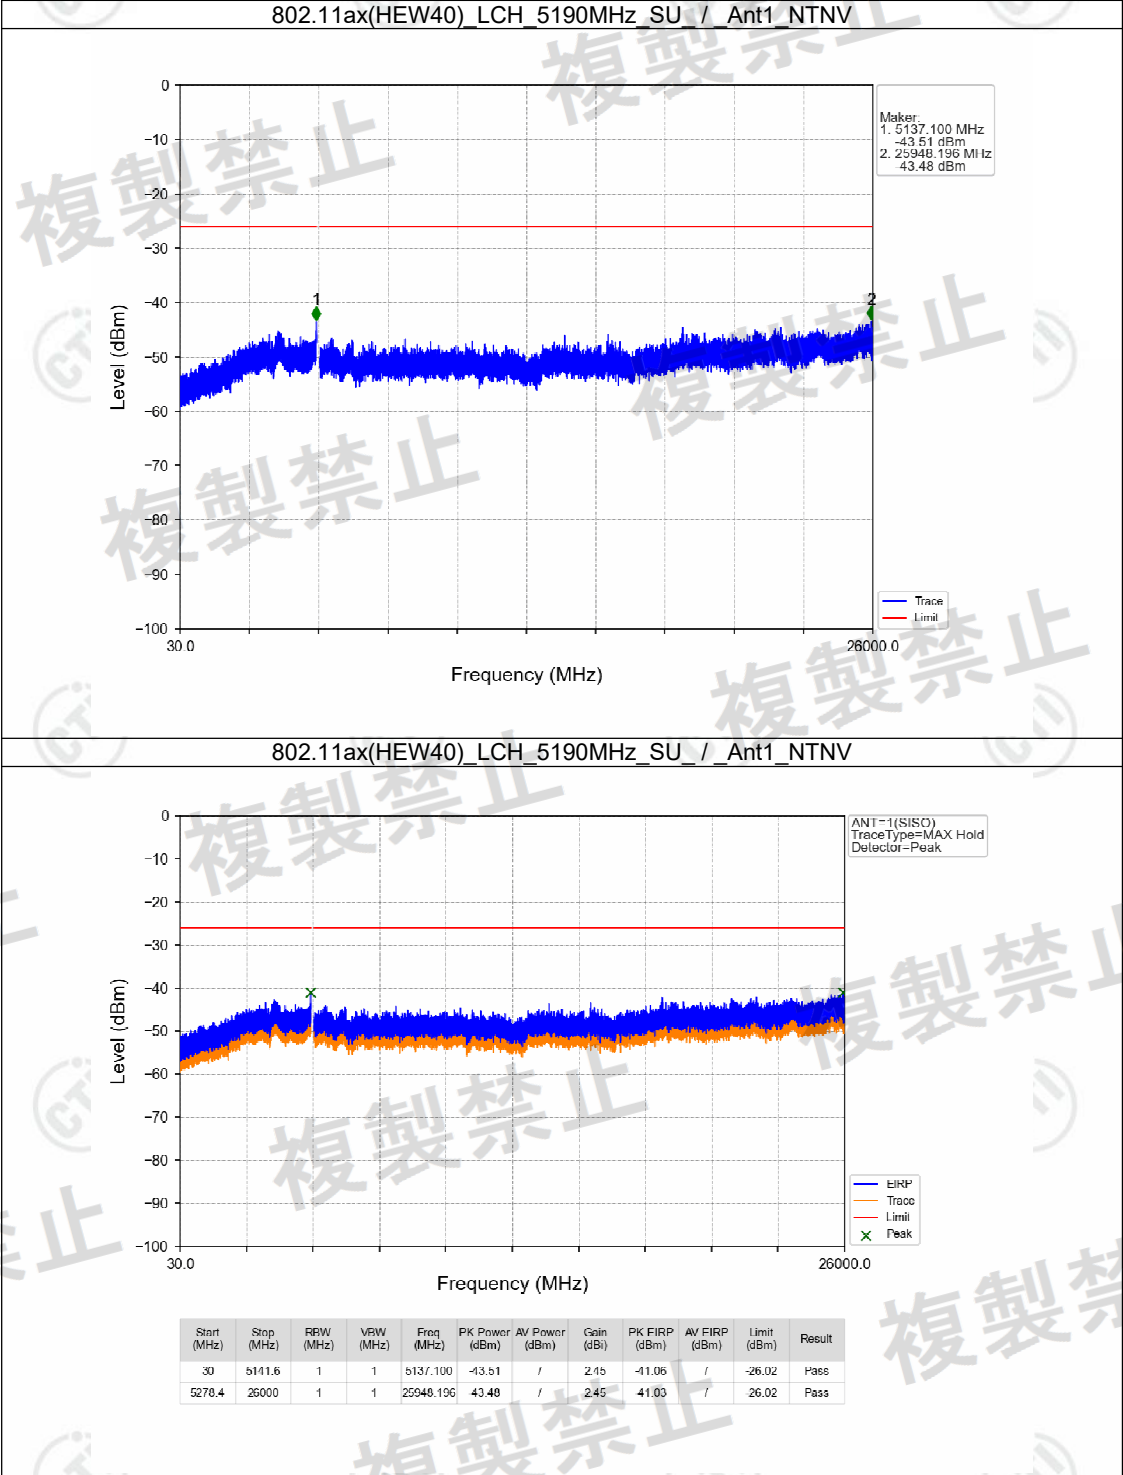

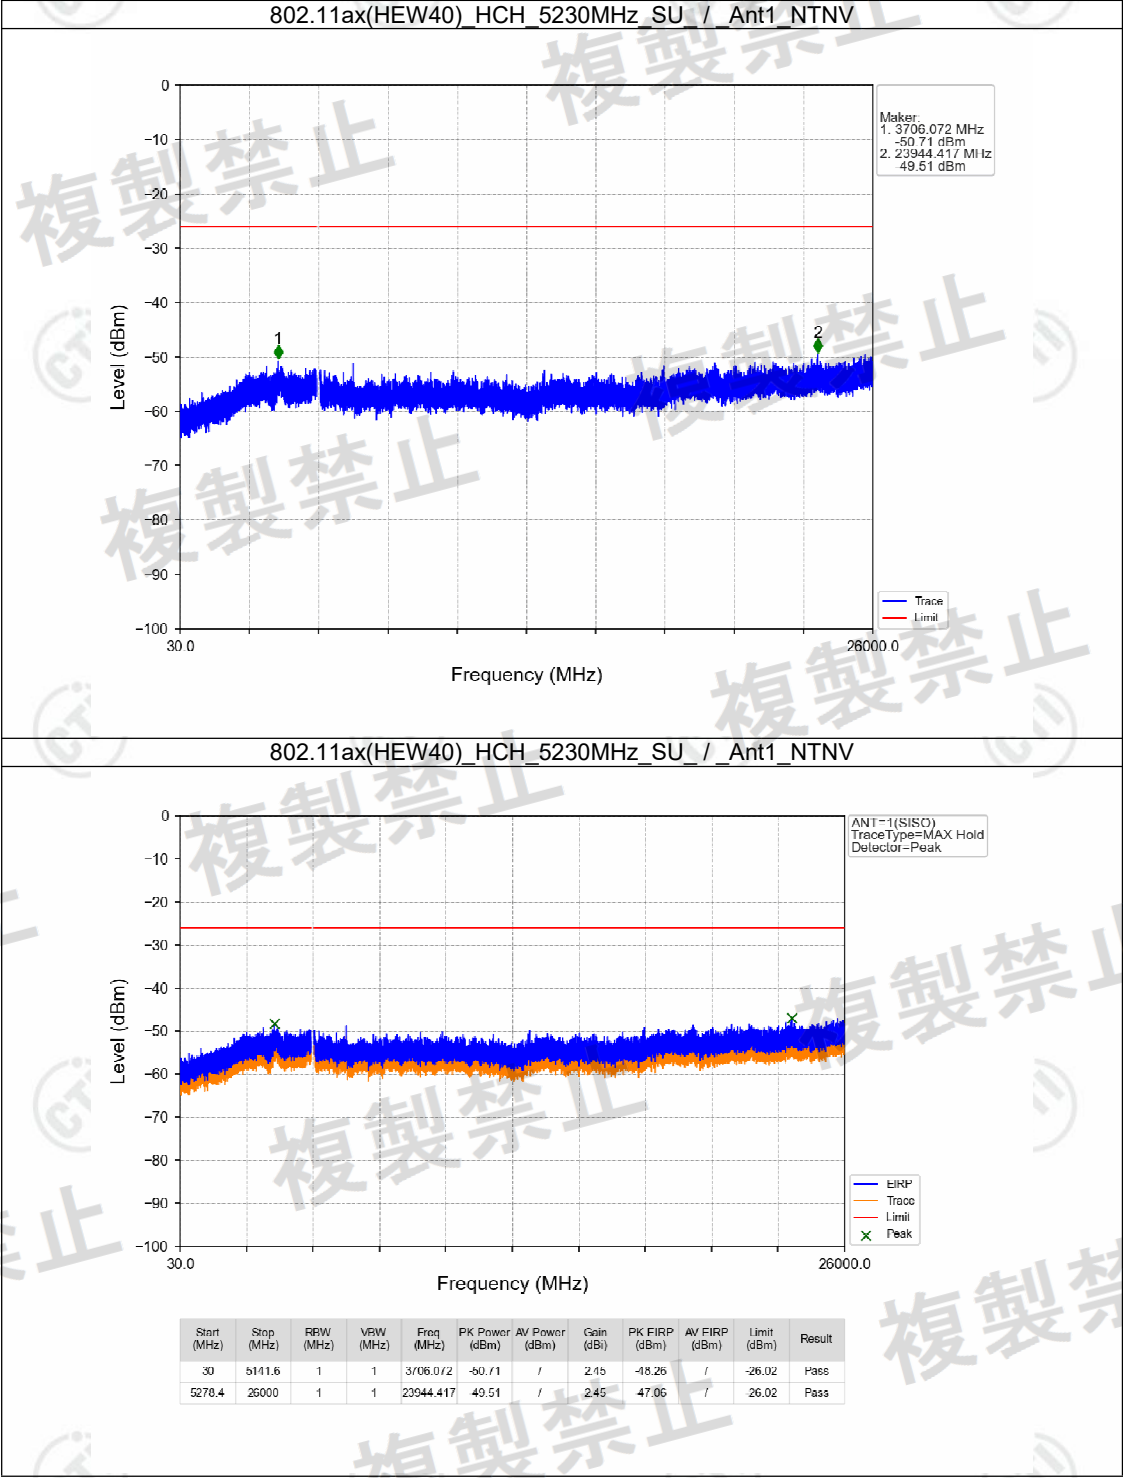

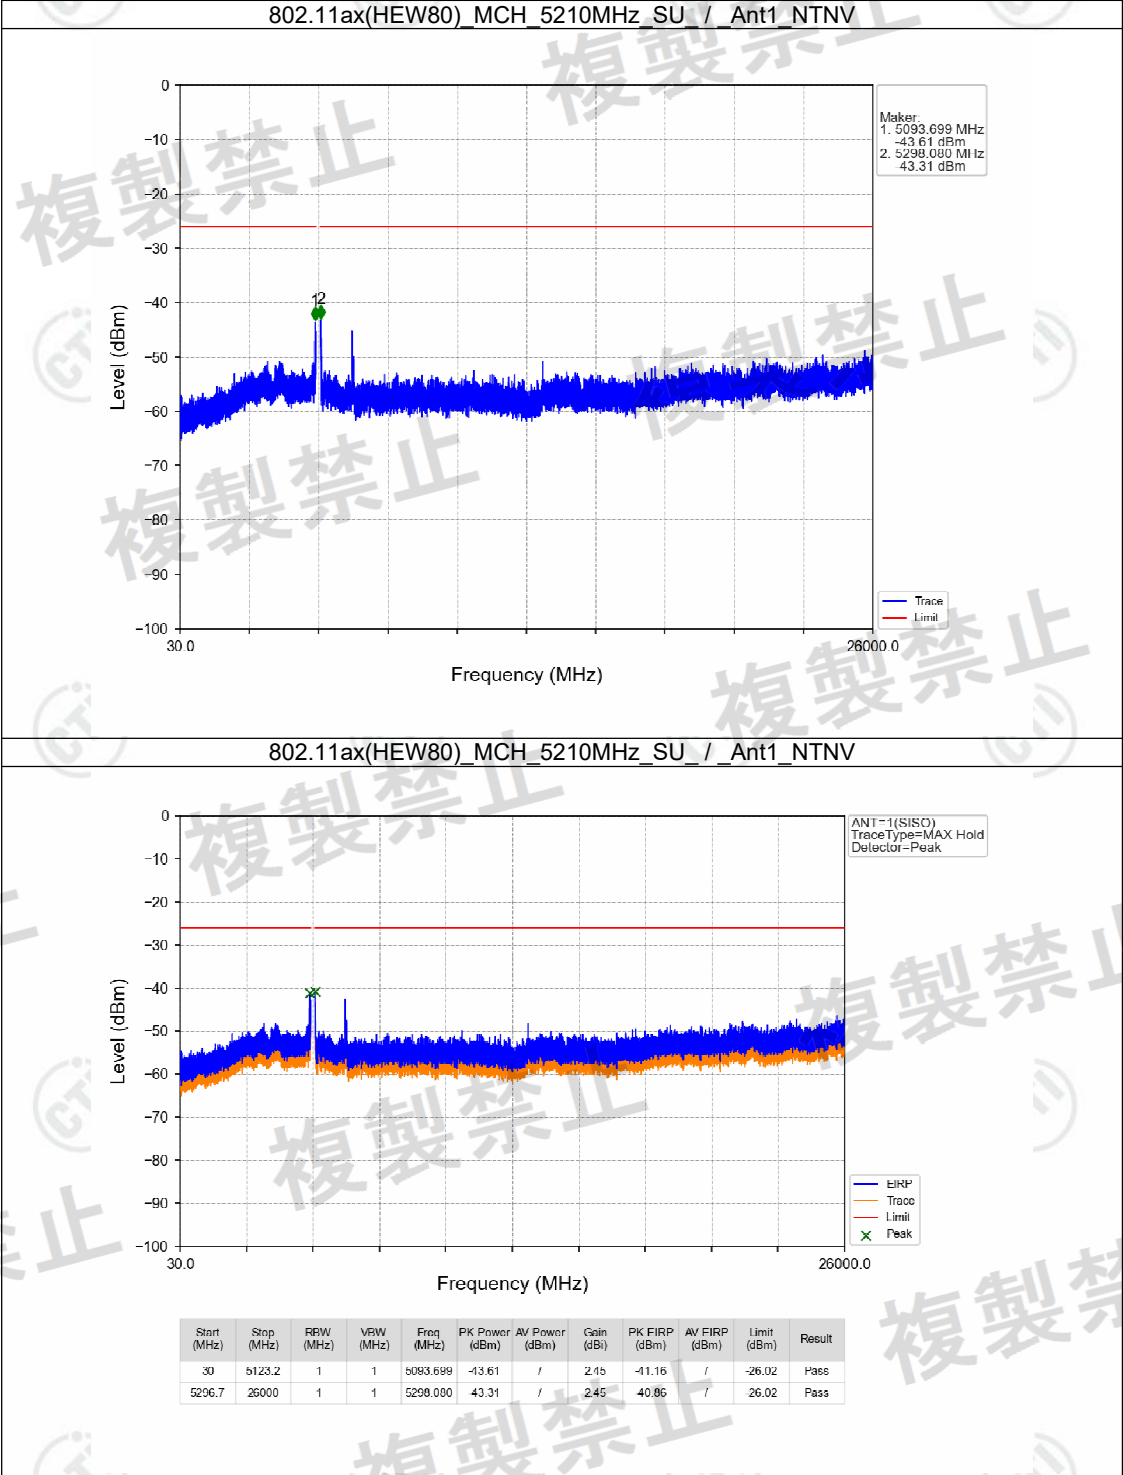

8. Secondary Radiated Emission

8.1 Test Result

8.1.1 RxSe_NTNV_SISO

NTNV														
Mode	TX Type	Freq. (MHz)	RU	RU Pos	A N T	Freq. Range		Marker				Limit (nW)	Verdict	
						Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm)	PK Power (nW)	AV Power (dBm)			AV Power (nW)
802.11a	SISO	5180	/	/	1	30	1000	170.25	-74.08	0.039	/	/	4	Pass
						1000	26500	4256.35	-56.95	2.018	-72.42	0.057	20	Pass
		5200	/	/	1	30	1000	170.25	-74.86	0.033	/	/	4	Pass
						1000	26500	4255.5	-57.38	1.828	/	/	20	Pass
		5240	/	/	1	30	1000	463.75	-75.36	0.029	/	/	4	Pass
						1000	26500	4256.35	-57.06	1.968	/	/	20	Pass
802.11n (HT20)	SISO	5180	/	/	1	30	1000	167.35	-75.47	0.028	/	/	4	Pass
						1000	26500	26466	-58.59	1.384	/	/	20	Pass
		5200	/	/	1	30	1000	167.4	-74.15	0.038	/	/	4	Pass
						1000	26500	4184.1	-59.21	1.199	/	/	20	Pass
		5240	/	/	1	30	1000	167.35	-75.40	0.029	/	/	4	Pass
						1000	26500	4184.1	-58.25	1.496	/	/	20	Pass
802.11n	SISO	5190	/	/	1	30	1000	167.35	-75.74	0.027	/	/	4	Pass

(HT40)						1000	26500	26172.75	-58.14	1.535	/	/	20	Pass
		5230	/	/	1	30	1000	167.35	-75.19	0.030	/	/	4	Pass
						1000	26500	4184.1	-57.86	1.637	/	/	20	Pass
802.1 1ac (VHT 20)	SISO	5180	/	/	1	30	1000	167.35	-75.55	0.028	/	/	4	Pass
						1000	26500	26368.25	-58.04	1.570	/	/	20	Pass
		5200	/	/	1	30	1000	167.35	-75.30	0.030	/	/	4	Pass
						1000	26500	1748	-56.65	2.163	-77.03	0.020	20	Pass
		5240	/	/	1	30	1000	167.35	-75.14	0.031	/	/	4	Pass
						1000	26500	1747.15	-49.53	11.143	-77.81	0.017	20	Pass
802.1 1ac (VHT 40)	SISO	5190	/	/	1	30	1000	167.35	-75.10	0.031	/	/	4	Pass
						1000	26500	4184.1	-58.72	1.343	/	/	20	Pass
		5230	/	/	1	30	1000	167.35	-75.18	0.030	/	/	4	Pass
						1000	26500	4184.1	-57.82	1.652	/	/	20	Pass
802.1 1ac (VHT 80)	SISO	5210	/	/	1	30	1000	829.4	-75.19	0.030	/	/	4	Pass
						1000	26500	26458.35	-58.21	1.510	/	/	20	Pass
802.1 1ax (HE W20)	SISO	5180	SU	/	1	30	1000	167.35	-75.28	0.030	/	/	4	Pass
						1000	26500	4184.1	-58.79	1.321	/	/	20	Pass
		5200	SU	/	1	30	1000	167.35	-73.43	0.045	/	/	4	Pass
						1000	26500	4184.1	-58.53	1.403	/	/	20	Pass
		5240	SU	/	1	30	1000	167.35	-74.98	0.032	/	/	4	Pass

						1000	26500	26160.85	-58.50	1.413	/	/	20	Pass
802.1 1ax (HE W40)	SISO	5190	SU	/	1	30	1000	167.35	-75.60	0.028	/	/	4	Pass
						1000	26500	4184.1	-58.49	1.416	/	/	20	Pass
		5230	SU	/	1	30	1000	167.35	-74.95	0.032	/	/	4	Pass
						1000	26500	26296.85	-58.49	1.416	/	/	20	Pass
802.1 1ax (HE W80)	SISO	5210	SU	/	1	30	1000	166.75	-74.48	0.036	/	/	4	Pass
						1000	26500	26356.35	-58.25	1.496	/	/	20	Pass

8.2 Test Graph

8.2.1 RxSe_NTNV_SISO

