



IEEE 802.11a Mode: 5700MHz Horizontal

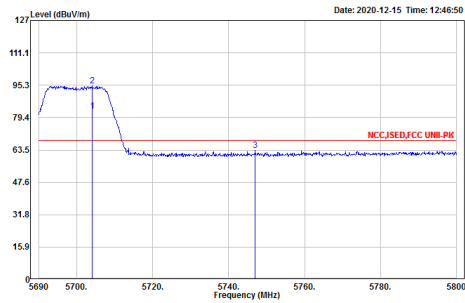


Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 * 5704.080	82.76	68.20	14.56	82.27	0.49	Average
2 * 5703.640	95.06	68.20	26.86	94.57	0.49	Peak
3 † 5746.980	63.28	68.20	-4.92	62.68	0.60	Peak

IEEE 802.11a Mode: 5700MHz Vertical

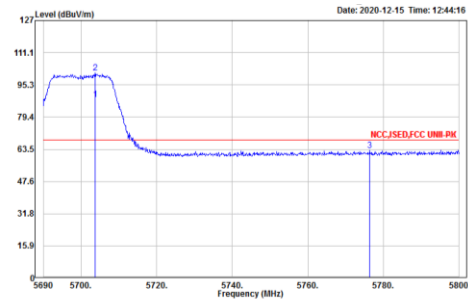


Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 * 5703.640	88.10	68.20	19.90	87.61	0.49	Average
2 * 5703.640	101.26	68.20	33.06	100.77	0.49	Peak
3 † 5776.350	62.93	68.20	-5.27	62.17	0.76	Peak

IEEE 802.11a Mode: 5745MHz Horizontal

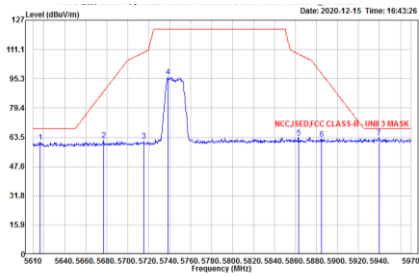

Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 † 5636.480	60.79	68.20	-7.41	60.71	0.08	Peak
2 † 5676.960	62.02	88.19	-26.17	61.65	0.37	Peak
3 † 5715.480	61.65	109.54	-47.89	61.13	0.52	Peak
4 † 5730.520	96.33	122.20	-25.87	95.74	0.59	Peak
5 † 5862.720	63.38	108.64	-45.26	62.32	1.06	Peak
6 † 5884.680	62.67	98.01	-35.34	61.53	1.14	Peak
7 † 5939.400	63.16	68.20	-5.04	61.83	1.33	Peak

IEEE 802.11a Mode: 5745MHz Vertical

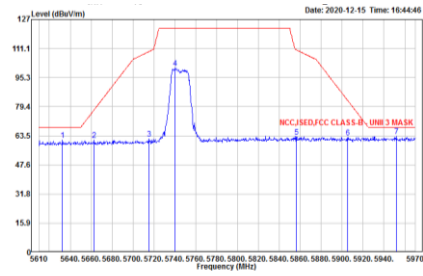

Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 † 5632.680	61.11	68.20	-7.09	60.95	0.16	Peak
2 † 5662.920	61.23	77.79	-16.56	60.93	0.30	Peak
3 † 5715.480	61.83	109.54	-47.71	61.31	0.52	Peak
4 † 5739.960	100.61	122.20	-21.59	100.02	0.59	Peak
5 † 5856.240	63.03	110.45	-47.42	62.00	1.03	Peak
6 † 5905.200	62.74	82.81	-20.07	61.51	1.23	Peak
7 † 5952.000	63.27	68.20	-4.93	61.90	1.37	Peak


Note:

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

IEEE 802.11a Mode: 5785MHz Horizontal

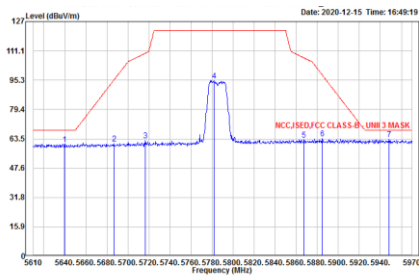


Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 5639.880	60.71	68.20	-7.49	60.52	0.19	Peak
2 5686.680	61.06	95.38	-34.32	60.65	0.41	Peak
3 5716.560	62.52	109.84	-47.32	61.99	0.53	Peak
4 5781.720	95.05	122.20	-27.15	94.26	0.79	Peak
5 5867.400	63.00	107.33	-44.33	61.92	1.08	Peak
6 5884.680	63.53	98.01	-34.48	62.39	1.14	Peak
7 5948.400	63.24	68.20	-4.96	61.90	1.34	Peak

IEEE 802.11a Mode: 5785MHz Vertical

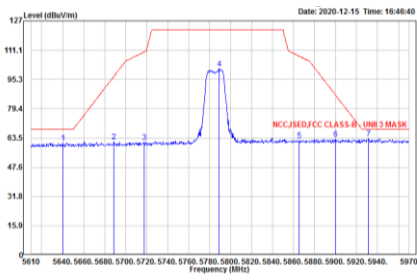


Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 5640.240	60.85	68.20	-7.35	60.66	0.19	Peak
2 5688.840	61.52	96.97	-35.45	61.10	0.42	Peak
3 5717.640	61.33	110.14	-48.81	60.80	0.53	Peak
4 5780.920	101.22	122.20	-20.98	100.40	0.82	Peak
5 5865.600	62.36	107.83	-45.47	61.29	1.07	Peak
6 5899.800	62.88	86.81	-23.93	61.67	1.21	Peak
7 5931.400	63.35	68.20	-4.85	62.05	1.30	Peak

IEEE 802.11a Mode: 5825MHz Horizontal

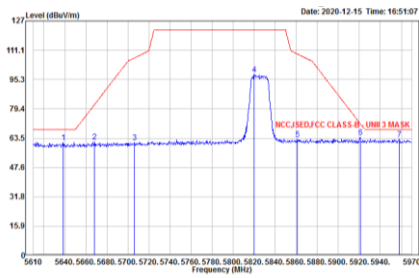

Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 5630.400	61.15	68.20	-7.05	60.97	0.18	Peak
2 5668.320	61.63	81.79	-20.16	61.31	0.32	Peak
3 5706.400	61.14	107.02	-45.88	60.64	0.50	Peak
4 5820.240	97.93	122.20	-24.27	97.00	0.93	Peak
5 5861.280	63.03	109.04	-46.01	61.98	1.05	Peak
6 5920.680	63.85	71.38	-7.53	62.58	1.27	Peak
7 5957.760	63.04	68.20	-5.16	61.66	1.38	Peak

IEEE 802.11a Mode: 5825MHz Vertical

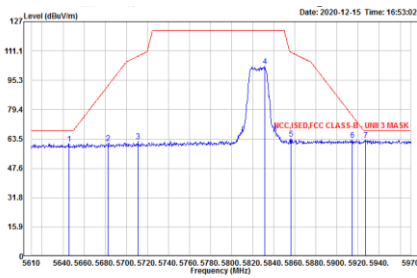

Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 5645.640	60.99	68.20	-7.21	60.78	0.21	Peak
2 5682.720	61.42	92.45	-31.03	61.03	0.39	Peak
3 5711.160	62.23	108.33	-46.10	61.72	0.51	Peak
4 5831.400	103.07	122.20	-19.13	102.10	0.97	Peak
5 5856.240	63.54	110.45	-46.91	62.53	1.03	Peak
6 5914.560	63.03	75.90	-12.87	61.77	1.26	Peak
7 5926.800	62.97	68.20	-5.23	61.68	1.29	Peak


Note:

Result = Reading + Correct Factor

Margin = Result - Limit


Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain

IEEE 802.11n HT20 Mode: 5180MHz Horizontal

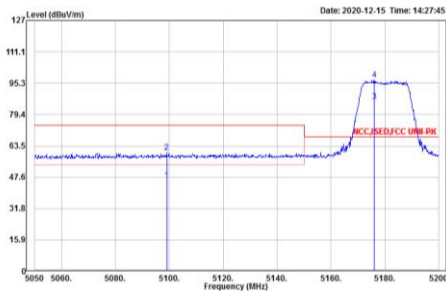


	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5099.850	46.14	54.00	-7.86	47.18	-1.04	Average
2	5099.850	60.16	74.00	-13.84	61.20	-1.04	Peak
3	5176.000	86.03	68.20	17.83	87.06	-1.03	Average
4	5176.000	96.96	68.20	28.76	97.99	-1.03	Peak

IEEE 802.11n HT20 Mode: 5180MHz Vertical

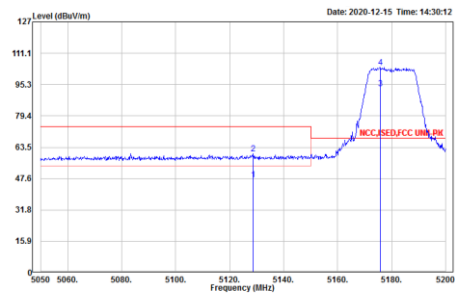


	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5128.600	47.09	54.00	-6.91	48.11	-1.02	Average
2	5128.600	60.29	74.00	-13.71	61.31	-1.02	Peak
3	5175.700	93.39	68.20	25.19	94.42	-1.03	Average
4	5175.700	104.03	68.20	35.83	105.06	-1.03	Peak

IEEE 802.11n HT20 Mode: 5200MHz Horizontal

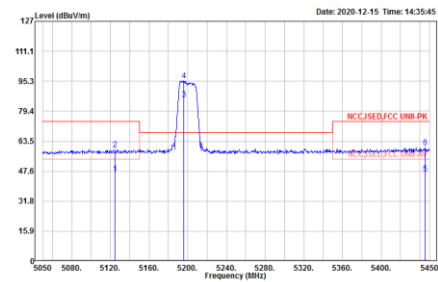

	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5124.800	46.32	54.00	-7.68	47.35	-1.03	Average
2	5124.800	59.23	74.00	-14.77	60.26	-1.03	Peak
3	5196.000	85.66	68.20	17.46	86.70	-1.04	Average
4	5196.000	95.58	68.20	27.38	96.62	-1.04	Peak
5	5445.200	46.63	54.00	-7.37	47.10	-0.47	Average
6	5445.200	60.09	74.00	-13.91	60.56	-0.47	Peak

IEEE 802.11n HT20 Mode: 5200MHz Vertical

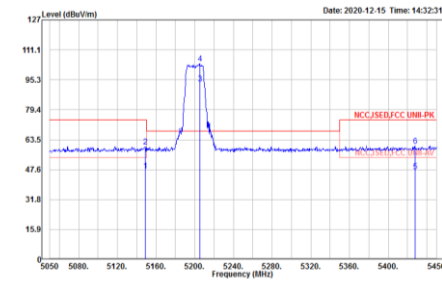

	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.800	47.07	54.00	-6.93	48.07	-1.00	Average
2	5148.800	59.99	74.00	-14.01	60.99	-1.00	Peak
3	5205.200	93.12	68.20	24.92	94.16	-1.04	Average
4	5205.200	103.93	68.20	35.73	104.97	-1.04	Peak
5	5427.600	46.67	54.00	-7.33	47.17	-0.50	Average
6	5427.600	60.38	74.00	-13.62	60.88	-0.50	Peak


Note:

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

IEEE 802.11n HT20 Mode: 5240MHz Horizontal

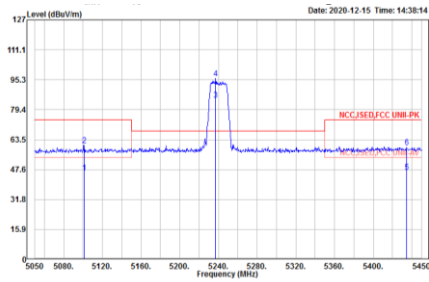


	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5101.200	46.17	54.00	-7.83	47.21	-1.04	Average
2	5101.200	68.68	74.00	-13.32	61.72	-1.04	Peak
3	5237.200	84.52	68.20	16.32	85.52	-1.00	Average
4	5237.200	95.88	68.20	27.68	96.88	-1.00	Peak
5	5434.400	46.54	54.00	-7.46	47.04	-0.50	Average
6	5434.400	59.65	74.00	-14.35	60.15	-0.50	Peak

IEEE 802.11n HT20 Mode: 5240MHz Vertical

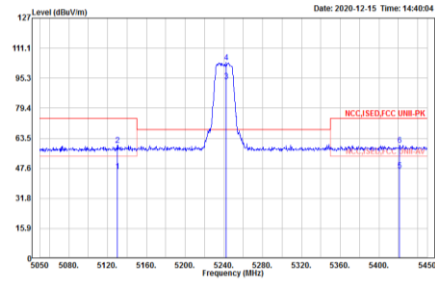


	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5130.000	45.98	54.00	-8.02	47.00	-1.02	Average
2	5130.000	59.96	74.00	-14.04	60.98	-1.02	Peak
3	5242.400	93.54	68.20	25.34	94.52	-0.98	Average
4	5242.400	103.68	68.20	35.48	104.58	-0.98	Peak
5	5421.200	46.49	54.00	-7.51	47.01	-0.52	Average
6	5421.200	59.81	74.00	-14.19	60.33	-0.52	Peak

IEEE 802.11n HT20 Mode: 5260MHz Horizontal

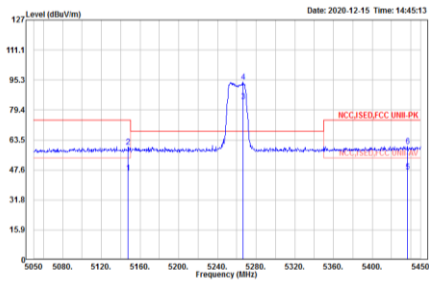

	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.600	46.11	54.00	-7.89	47.11	-1.00	Average
2	5147.600	59.76	74.00	-14.24	60.76	-1.00	Peak
3	5266.400	83.94	68.20	15.74	84.90	-0.96	Average
4	5266.400	94.25	68.20	26.05	95.21	-0.96	Peak
5	5436.400	46.76	54.00	-7.24	47.25	-0.49	Average
6	5436.400	60.19	74.00	-13.81	60.68	-0.49	Peak

IEEE 802.11n HT20 Mode: 5260MHz Vertical

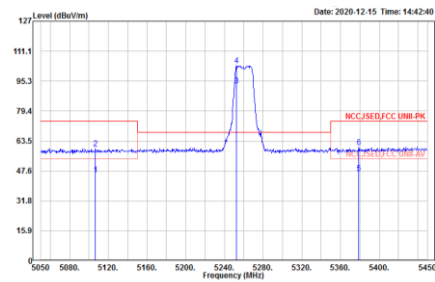

	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5106.000	45.72	54.00	-8.28	46.76	-1.04	Average
2	5106.000	59.48	74.00	-14.52	60.52	-1.04	Peak
3	5252.400	93.05	68.20	24.85	94.02	-0.97	Average
4	5252.400	103.56	68.20	35.36	104.53	-0.97	Peak
5	5378.800	46.52	54.00	-7.48	47.16	-0.64	Average
6	5378.800	60.33	74.00	-13.67	60.97	-0.64	Peak


Note:

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

IEEE 802.11n HT20 Mode: 5300MHz Horizontal

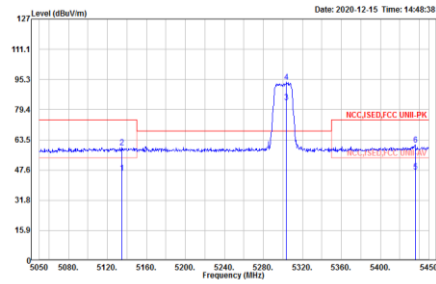


	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5134.800	46.28	54.00	-7.72	47.30	-1.02	Average	
2	5134.800	59.49	74.00	-14.51	60.51	-1.02	Peak	
3	5303.600	83.38	68.20	15.18	84.29	-0.91	Average	
4	5303.600	94.02	68.20	25.82	94.93	-0.91	Peak	
5	5435.600	46.85	54.00	-7.15	47.34	-0.49	Average	
6	5435.600	60.90	74.00	-13.10	61.39	-0.49	Peak	

IEEE 802.11n HT20 Mode: 5300MHz Vertical

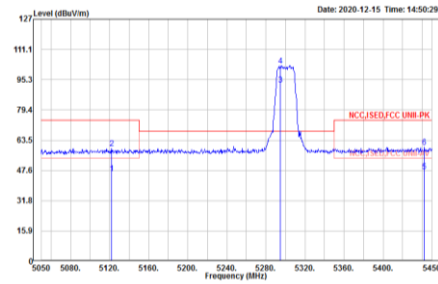


	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5122.000	46.03	54.00	-7.97	47.06	-1.03	Average	
2	5122.000	59.12	74.00	-14.88	60.15	-1.03	Peak	
3	5294.800	92.56	68.20	24.36	93.48	-0.92	Average	
4	5294.800	102.70	68.20	34.50	103.62	-0.92	Peak	
5	5442.000	46.98	54.00	-7.02	47.46	-0.48	Average	
6	5442.000	60.05	74.00	-13.95	60.53	-0.48	Peak	

IEEE 802.11n HT20 Mode: 5320MHz Horizontal

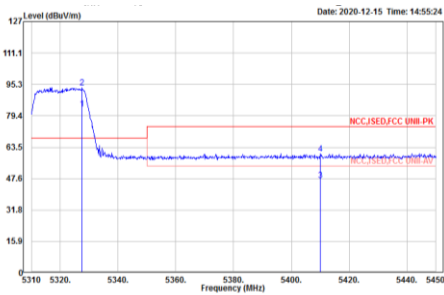

	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5327.500	83.02	68.20	14.82	83.84	-0.82	Average	
2	5327.500	93.67	68.20	25.47	94.49	-0.82	Peak	
3	5410.100	46.65	54.00	-7.35	47.20	-0.55	Average	
4	5410.100	60.28	74.00	-13.72	60.83	-0.55	Peak	

IEEE 802.11 HT20 Mode: 5320MHz Vertical

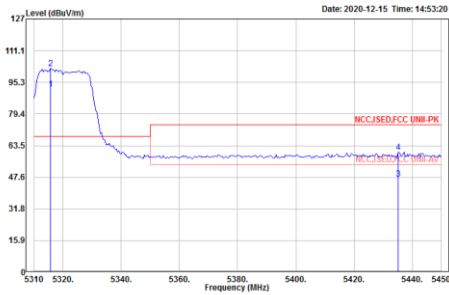

	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5315.600	91.86	68.20	23.66	92.73	-0.87	Average	
2	5315.600	102.30	68.20	34.10	103.17	-0.87	Peak	
3	5435.200	46.67	54.00	-7.33	47.17	-0.50	Average	
4	5435.200	60.28	74.00	-13.72	60.78	-0.50	Peak	


Note:

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

IEEE 802.11n HT20 Mode: 5500MHz Horizontal

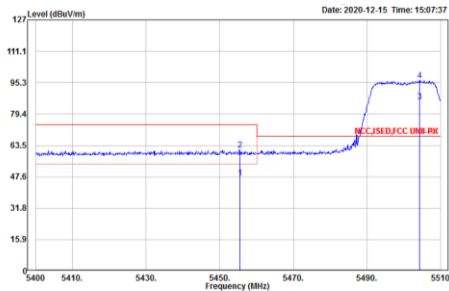


	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5455.440	47.25	54.00	-6.75	47.70	-0.45	Average
2	5455.440	61.41	74.00	-12.59	61.86	-0.45	Peak
3	5504.170	85.62	68.20	17.42	85.96	-0.34	Average
4	5504.170	96.53	68.20	28.33	96.87	-0.34	Peak

IEEE 802.11n HT20 Mode: 5500MHz Vertical

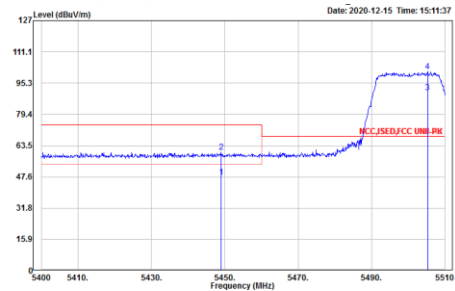


	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5448.950	47.46	54.00	-6.54	47.92	-0.46	Average
2	5448.950	60.15	74.00	-13.85	60.61	-0.46	Peak
3	5505.270	90.49	68.20	22.29	90.83	-0.34	Average
4	5505.270	101.05	68.20	32.85	101.39	-0.34	Peak

IEEE 802.11n HT20 Mode: 5580MHz Horizontal

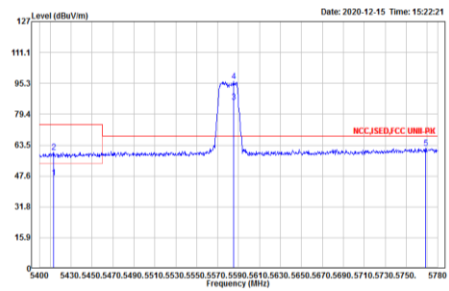

	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5413.680	46.96	54.00	-7.04	47.50	-0.54	Average
2	5413.680	59.81	74.00	-14.19	60.35	-0.54	Peak
3	5585.060	85.70	68.20	17.50	85.76	-0.06	Average
4	5585.060	96.21	68.20	28.01	96.27	-0.06	Peak
5	5768.220	62.02	68.20	-6.18	61.31	0.71	Peak

IEEE 802.11n HT20 Mode: 5580MHz Vertical

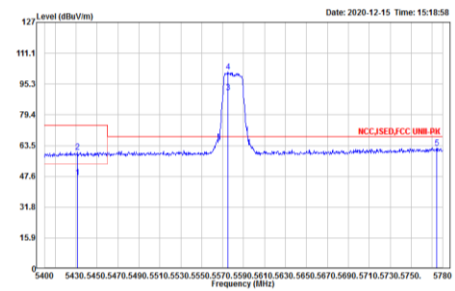

	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5431.540	47.15	54.00	-6.85	47.64	-0.49	Average
2	5431.540	60.19	74.00	-13.81	60.68	-0.49	Peak
3	5575.180	90.96	68.20	22.76	91.05	-0.09	Average
4	5575.180	101.68	68.20	33.48	101.77	-0.09	Peak
5	5773.920	62.15	68.20	-6.05	61.40	0.75	Peak


Note:

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

IEEE 802.11n HT20 Mode: 5700MHz Horizontal

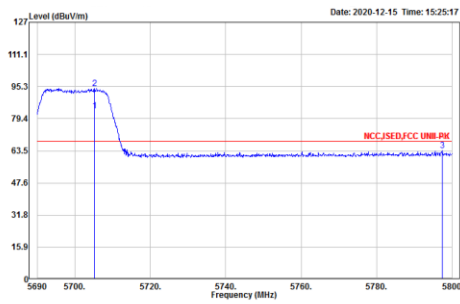


Freq	Level	Limit	Over	Read	Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1 * 5705.180	83.38	68.20	15.10	82.81	0.49	Average	
2 * 5705.180	94.26	68.20	26.06	93.77	0.49	Peak	
3 ! 5797.470	63.55	68.20	-4.65	62.67	0.88	Peak	

IEEE 802.11n HT20 Mode: 5700MHz Vertical

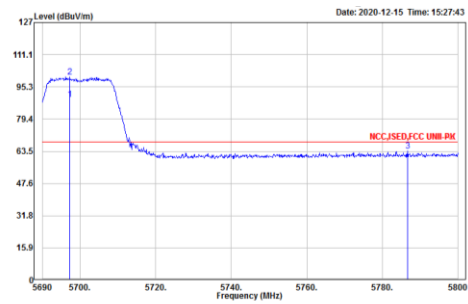


Freq	Level	Limit	Over	Read	Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1 * 5697.260	88.99	68.20	20.79	88.52	0.47	Average	
2 * 5697.260	100.12	68.20	31.92	99.65	0.47	Peak	
3 ! 5786.690	63.59	68.20	-4.61	62.77	0.82	Peak	

IEEE 802.11n HT20 Mode: 5745MHz Horizontal

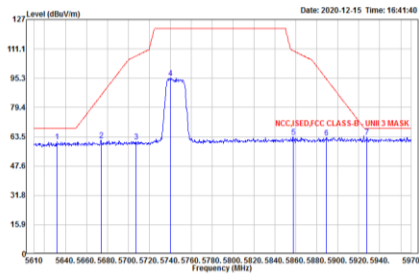

Freq	Level	Limit	Over	Read	Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1 ! 5631.600	60.95	68.20	-7.25	60.80	0.15	Peak	
2 ! 5674.000	61.77	86.06	-24.29	61.41	0.36	Peak	
3 ! 5707.200	61.03	107.22	-46.19	60.53	0.50	Peak	
4 ! 5740.320	95.36	122.20	-26.84	94.77	0.59	Peak	
5 ! 5857.320	63.24	110.15	-46.91	62.21	1.03	Peak	
6 ! 5889.000	63.10	94.81	-31.71	61.94	1.16	Peak	
7 ! 5927.800	63.38	68.20	-4.82	62.09	1.29	Peak	

IEEE 802.11n HT20 Mode: 5745MHz Vertical

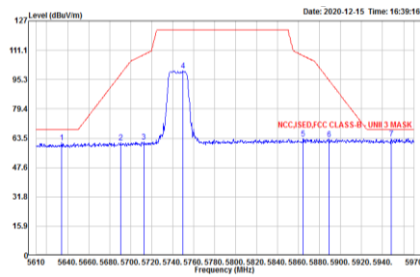

Freq	Level	Limit	Over	Read	Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1 ! 5634.480	61.14	68.20	-7.06	60.97	0.17	Peak	
2 ! 5670.640	61.42	96.30	-36.88	60.98	0.44	Peak	
3 ! 5712.600	61.60	100.73	-47.13	61.08	0.52	Peak	
4 ! 5750.040	100.87	122.20	-22.13	99.45	0.62	Peak	
5 ! 5864.160	63.42	108.23	-44.81	62.35	1.07	Peak	
6 ! 5889.640	63.05	95.08	-32.03	61.89	1.16	Peak	
7 ! 5948.400	63.25	68.20	-4.95	61.91	1.34	Peak	


Note:

Result = Reading + Correct Factor

Margin = Result - Limit


Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain

IEEE 802.11n HT20 Mode: 5785MHz Horizontal

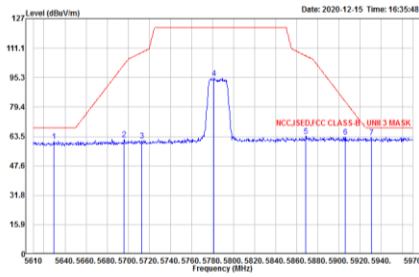


	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5629.440	60.86	68.20	-7.34	60.73	0.13	Peak
2	5696.040	62.10	102.28	-40.18	61.64	0.46	Peak
3	5712.960	61.41	108.83	-47.42	60.89	0.52	Peak
4	5781.360	94.97	122.20	-27.23	94.18	0.79	Peak
5	5866.480	63.67	107.02	-43.35	62.59	1.08	Peak
6	5905.560	63.17	82.55	-19.38	61.94	1.23	Peak
7	5930.400	62.99	68.20	-5.21	61.68	1.31	Peak

IEEE 802.11n HT20 Mode: 5785MHz Vertical

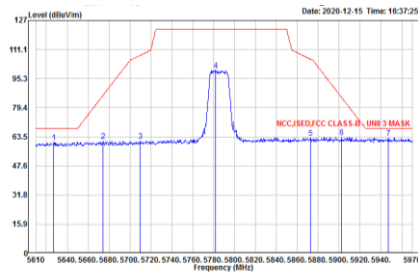


	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5627.280	60.49	68.20	-7.71	60.36	0.13	Peak
2	5674.440	61.18	86.33	-25.15	60.82	0.36	Peak
3	5709.720	61.26	107.92	-46.66	60.76	0.50	Peak
4	5781.720	99.72	122.20	-22.48	98.93	0.79	Peak
5	5872.800	62.94	105.82	-42.88	61.84	1.10	Peak
6	5902.320	63.34	84.04	-21.60	62.12	1.22	Peak
7	5946.960	62.97	68.20	-5.23	61.63	1.34	Peak

IEEE 802.11n HT20 Mode: 5825MHz Horizontal

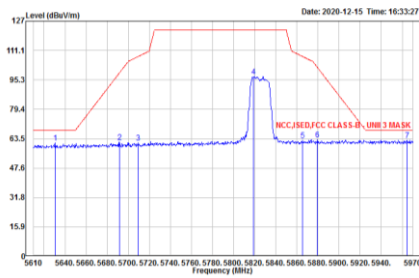

	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5630.880	61.38	68.20	-6.82	61.23	0.15	Peak
2	5691.720	61.66	99.10	-37.44	61.21	0.45	Peak
3	5709.000	61.13	107.72	-46.59	60.63	0.50	Peak
4	5818.000	97.11	122.20	-25.09	96.18	0.93	Peak
5	5865.240	62.51	107.93	-45.42	61.44	1.07	Peak
6	5879.280	62.98	102.02	-39.04	61.86	1.12	Peak
7	5964.240	62.74	68.20	-5.46	61.34	1.40	Peak

IEEE 802.11n HT20 Mode: 5825MHz Vertical

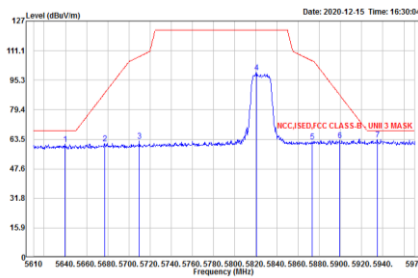

	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5639.520	60.78	68.20	-7.42	60.59	0.19	Peak
2	5676.960	61.38	88.19	-26.81	61.01	0.37	Peak
3	5709.720	62.71	107.92	-45.21	62.21	0.50	Peak
4	5820.600	99.31	122.20	-22.89	98.37	0.94	Peak
5	5873.160	62.45	105.71	-43.26	61.35	1.10	Peak
6	5899.880	62.84	87.34	-24.50	61.63	1.21	Peak
7	5934.720	63.46	68.20	-4.74	62.15	1.31	Peak


Note:

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

IEEE 802.11n HT40 Mode: 5190MHz Horizontal

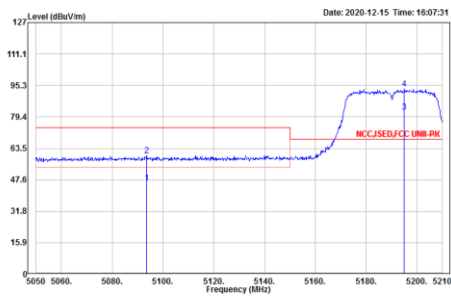


	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5093.680	46.01	54.00	-7.99	47.06	-1.05	Average	
2	5093.680	59.88	74.00	-14.12	60.93	-1.05	Peak	
3	5194.960	81.77	68.20	13.57	82.80	-1.03	Average	
4	5194.960	93.67	68.20	25.47	94.70	-1.03	Peak	

IEEE 802.11n HT40 Mode: 5190MHz Vertical

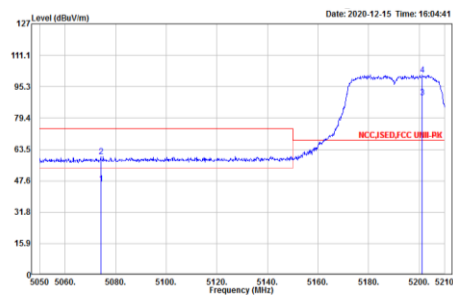


	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5074.160	46.07	54.00	-7.93	47.18	-1.11	Average	
2	5074.160	60.02	74.00	-13.98	61.13	-1.11	Peak	
3	5201.200	89.71	68.20	21.51	90.75	-1.04	Average	
4	5201.200	101.06	68.20	32.86	102.10	-1.04	Peak	

IEEE 802.11n HT40 Mode: 5230MHz Horizontal

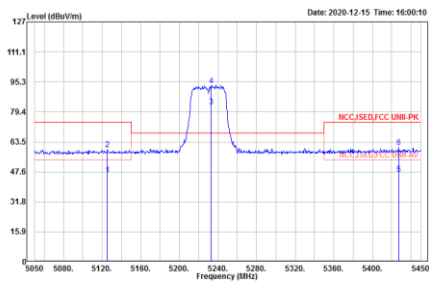

	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5125.600	46.03	54.00	-7.97	47.05	-1.02	Average	
2	5125.600	59.56	74.00	-14.44	60.58	-1.02	Peak	
3	5232.000	82.32	68.20	14.12	83.32	-1.00	Average	
4	5232.000	93.38	68.20	25.18	94.38	-1.00	Peak	
5	5426.800	46.56	54.00	-7.44	47.07	-0.51	Average	
6	5426.800	60.66	74.00	-13.34	61.17	-0.51	Peak	

IEEE 802.11n HT40 Mode: 5230MHz Vertical

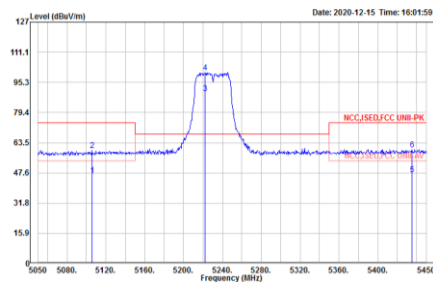

	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5105.600	46.37	54.00	-7.63	47.41	-1.04	Average	
2	5105.600	59.46	74.00	-14.54	60.50	-1.04	Peak	
3	5222.400	89.46	68.20	21.26	90.47	-1.01	Average	
4	5222.400	100.39	68.20	32.19	101.40	-1.01	Peak	
5	5435.200	46.72	54.00	-7.28	47.22	-0.50	Average	
6	5435.200	60.04	74.00	-13.96	60.54	-0.50	Peak	


Note:

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

IEEE 802.11n HT40 Mode: 5270MHz Horizontal

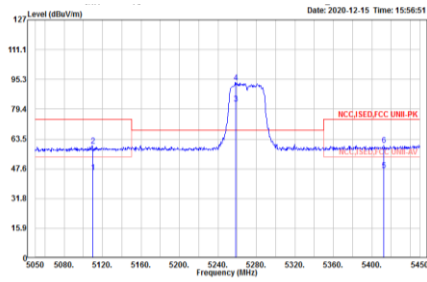


Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 5110.000	45.91	54.00	-8.09	46.94	-1.03	Average
2 5110.000	59.82	74.00	-14.18	60.85	-1.03	Peak
3 * 5258.400	82.25	68.20	14.05	83.22	-0.97	Average
4 * 5258.400	93.70	68.20	25.50	94.67	-0.97	Peak
5 5412.400	46.67	54.00	-7.33	47.21	-0.54	Average
6 5412.400	60.15	74.00	-13.85	60.69	-0.54	Peak

IEEE 802.11n HT40 Mode: 5270MHz Vertical

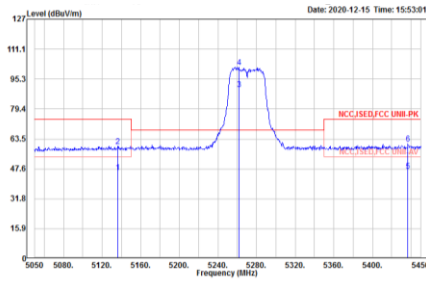


Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 5136.400	45.94	54.00	-8.06	46.96	-1.02	Average
2 5136.400	59.05	74.00	-14.95	60.07	-1.02	Peak
3 * 5261.600	89.91	68.20	21.71	90.87	-0.96	Average
4 * 5261.600	101.49	68.20	33.29	102.45	-0.96	Peak
5 5436.800	46.47	54.00	-7.53	46.96	-0.49	Average
6 5436.800	61.05	74.00	-12.95	61.54	-0.49	Peak

IEEE 802.11n HT40 Mode: 5310MHz Horizontal

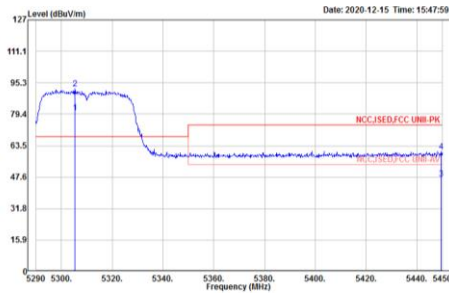

Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 * 5305.360	80.05	68.20	11.85	80.96	-0.91	Average
2 * 5305.360	92.25	68.20	24.05	93.16	-0.91	Peak
3 5449.520	46.84	54.00	-7.16	47.30	-0.46	Average
4 5449.520	60.57	74.00	-13.43	61.03	-0.46	Peak

IEEE 802.11n HT40 Mode: 5310MHz Vertical

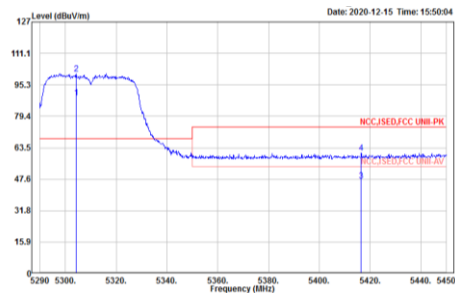

Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1 * 5304.400	88.86	68.20	20.66	89.77	-0.91	Average
2 * 5304.400	101.00	68.20	32.80	101.91	-0.91	Peak
3 5416.400	46.90	54.00	-7.10	47.43	-0.53	Average
4 5416.400	60.88	74.00	-13.12	61.41	-0.53	Peak


Note:

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

IEEE 802.11n HT40 Mode: 5510MHz Horizontal

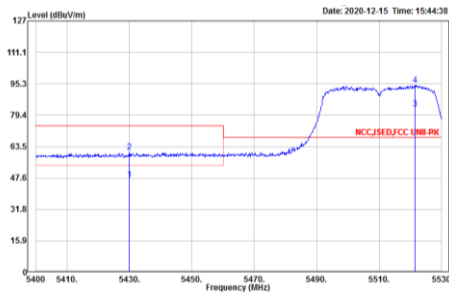


	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5430.830	46.65	54.00	-7.35	47.15	-0.50	Average	
2	5430.830	60.93	74.00	-13.07	61.43	-0.50	Peak	
3	5521.420	82.74	68.20	14.54	83.02	-0.28	Average	
4	5521.420	94.66	68.20	26.46	94.88	-0.28	Peak	

IEEE 802.11n HT40 Mode: 5510MHz Vertical

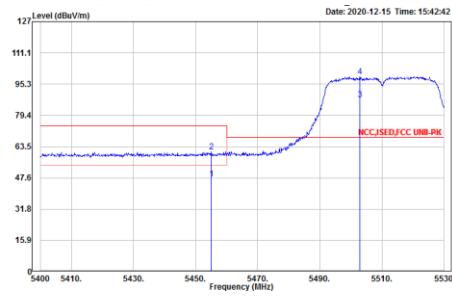


	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5455.120	47.05	54.00	-6.95	47.50	-0.45	Average	
2	5455.120	61.04	74.00	-12.96	61.49	-0.45	Peak	
3	5502.830	87.55	68.20	19.35	87.89	-0.34	Average	
4	5502.830	99.10	68.20	30.90	99.44	-0.34	Peak	

IEEE 802.11n HT40 Mode: 5550MHz Horizontal

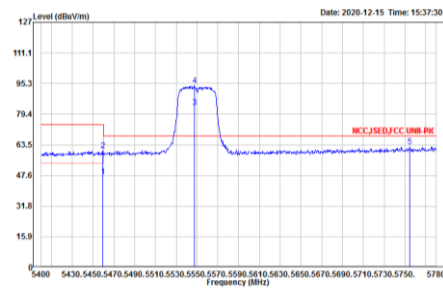

	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5459.280	46.99	54.00	-7.01	47.43	-0.44	Average	
2	5459.280	60.58	74.00	-13.42	61.02	-0.44	Peak	
3	5547.440	82.88	68.20	14.68	83.09	-0.21	Average	
4	5547.440	94.13	68.20	25.93	94.34	-0.21	Peak	
5	5754.540	62.60	68.20	-5.60	61.96	0.64	Peak	

IEEE 802.11n HT40 Mode: 5550MHz Vertical

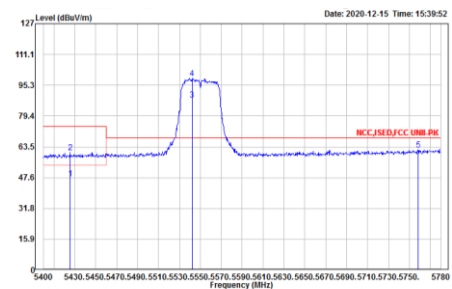

	Freq	Level	Limit	Over	Read	Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	5425.460	47.01	54.00	-6.99	47.52	-0.51	Average	
2	5425.460	60.42	74.00	-13.58	60.93	-0.51	Peak	
3	5542.120	87.65	68.20	19.45	87.87	-0.22	Average	
4	5542.120	98.91	68.20	30.71	99.13	-0.22	Peak	
5	5757.960	62.11	68.20	-6.09	61.45	0.66	Peak	


Note:

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

IEEE 802.11n HT40 Mode: 5670MHz Horizontal

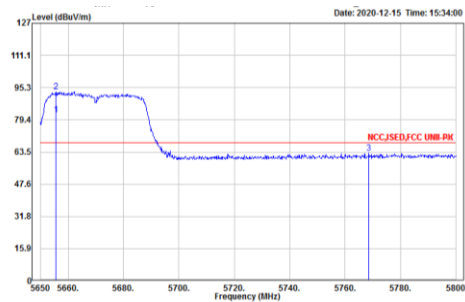


	Freq	Level	Limit	Over	Read	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
1	* 5655.550	81.79	68.20	13.59	81.52	0.27 Average
2	* 5655.550	93.44	68.20	25.24	93.17	0.27 Peak
3	! 5768.500	63.15	68.20	-5.05	62.44	0.71 Peak

IEEE 802.11n HT40 Mode: 5670MHz Vertical

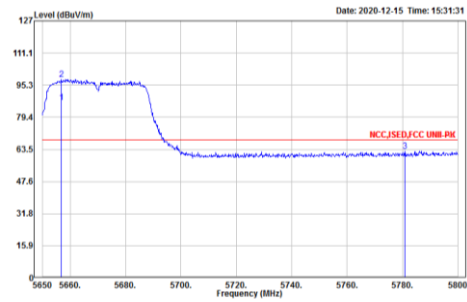


	Freq	Level	Limit	Over	Read	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
1	* 5656.750	86.83	68.20	18.63	86.56	0.27 Average
2	* 5656.750	98.07	68.20	29.87	97.80	0.27 Peak
3	! 5780.800	62.74	68.20	-5.46	61.95	0.79 Peak

IEEE 802.11n HT40 Mode: 5755MHz Horizontal

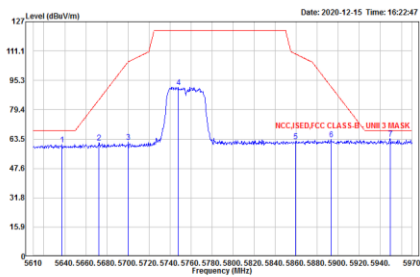

	Freq	Level	Limit	Over	Read	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
1	! 5637.360	60.41	68.20	-7.79	60.24	0.17 Peak
2	! 5672.640	61.69	84.99	-23.30	61.34	0.35 Peak
3	! 5700.360	61.86	105.30	-43.44	61.38	0.48 Peak
4	! 5747.880	91.71	122.20	-30.49	91.11	0.60 Peak
5	! 5859.480	62.41	109.54	-47.13	61.37	1.04 Peak
6	! 5892.960	63.19	91.87	-28.68	62.00	1.19 Peak
7	! 5949.120	63.58	68.20	-4.62	62.23	1.35 Peak

IEEE 802.11n HT40 Mode: 5755MHz Vertical

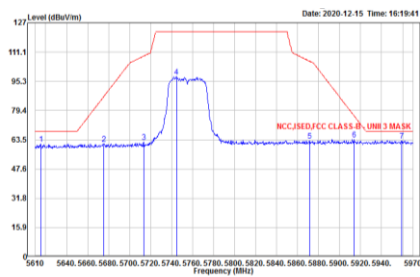


	Freq	Level	Limit	Over	Read	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
1	! 5635.400	61.23	68.20	-6.97	61.16	0.07 Peak
2	! 5675.160	61.43	86.86	-25.43	61.07	0.36 Peak
3	! 5713.320	62.24	108.93	-46.69	61.72	0.52 Peak
4	! 5744.640	97.74	122.20	-24.46	97.15	0.59 Peak
5	! 5871.560	62.90	106.22	-43.32	61.80	1.10 Peak
6	! 5913.480	63.83	76.70	-12.87	62.58	1.25 Peak
7	! 5959.200	63.15	68.20	-5.05	61.76	1.39 Peak

Note:

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

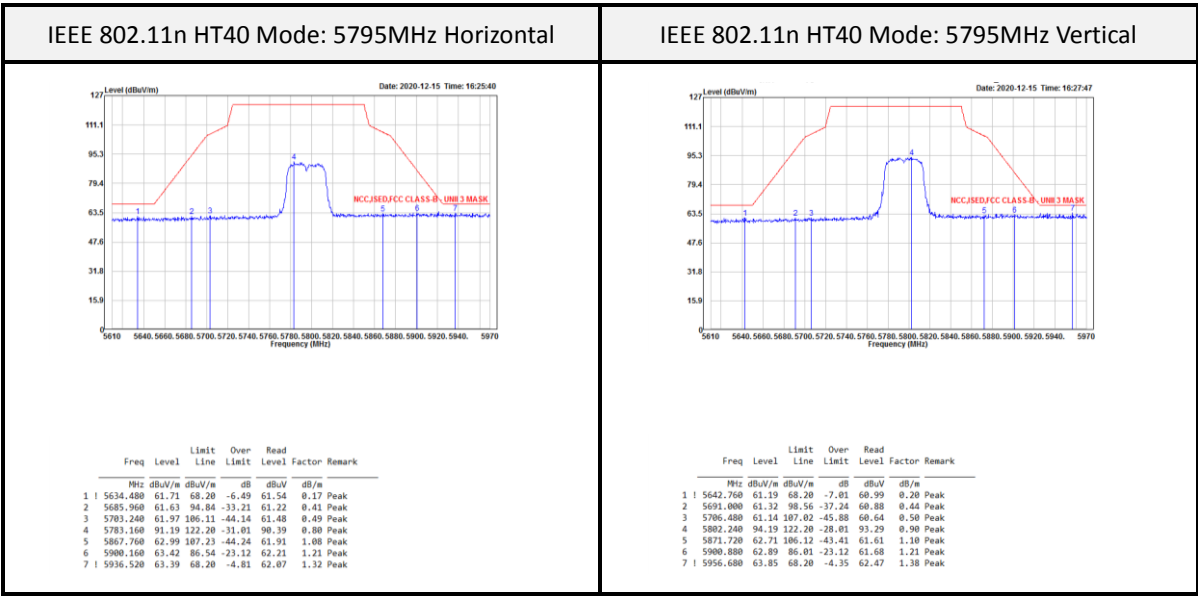

Note:
Result = Reading + Correct Factor
Margin = Result – Limit
Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain