



Test Mode: IEEE 802.11be(EHT20)

Test Voltage		Normal Voltage				Remarks
Test Frequency	MHz	6115	6175	6415	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	28.73	29.49	28.55	dB	Limit ≥ 25 dB
	+20	28.53	28.63	28.56	dB	Limit ≥ 25 dB
	-40	47.40	46.31	47.58	dB	Limit ≥ 40 dB
	+40	47.80	45.76	47.81	dB	Limit ≥ 40 dB


CH33

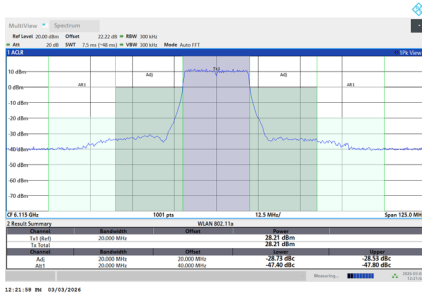

CH45

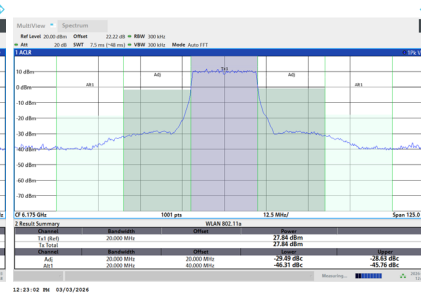


CH93

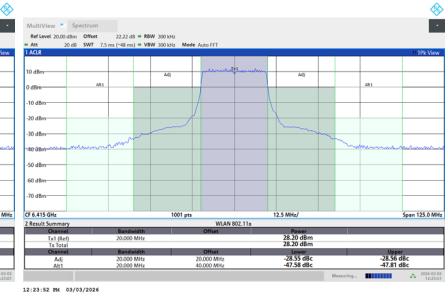


Test Mode: IEEE 802.11be(EHT40)

Test Voltage		Normal Voltage				Remarks
Test Frequency	MHz	6125	6165	6405	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	32.24	32.71	33.15	dB	Limit ≥ 25 dB
	+40	33.33	31.54	33.13	dB	Limit ≥ 25 dB
	-80	47.36	46.93	46.64	dB	Limit ≥ 40 dB
	+80	46.94	46.50	46.39	dB	Limit ≥ 40 dB


CH35

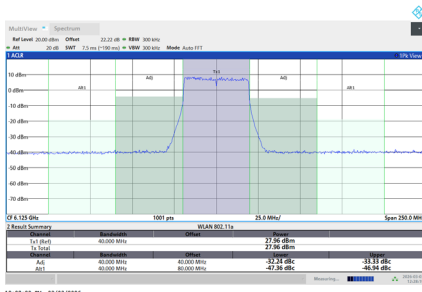

CH43

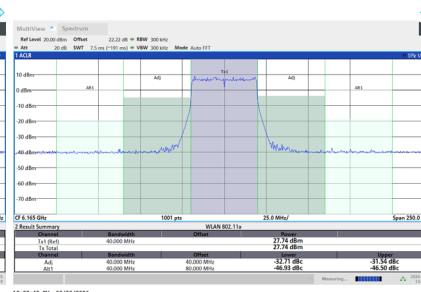


CH91

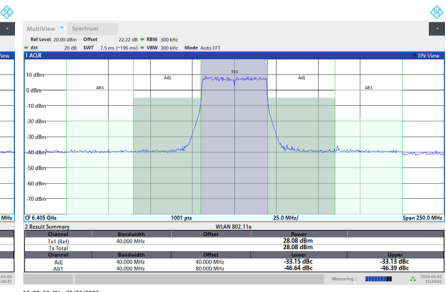


Test Mode: IEEE 802.11be(EHT80)

Test Voltage		Normal Voltage				Remarks
Test Frequency	MHz	6145	6225	6385	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	32.25	35.10	33.29	dB	Limit ≥ 25 dB
	+80	32.47	33.83	34.04	dB	Limit ≥ 25 dB
	-160	44.55	44.49	43.64	dB	Limit ≥ 40 dB
	+160	43.54	43.59	44.91	dB	Limit ≥ 40 dB


CH39

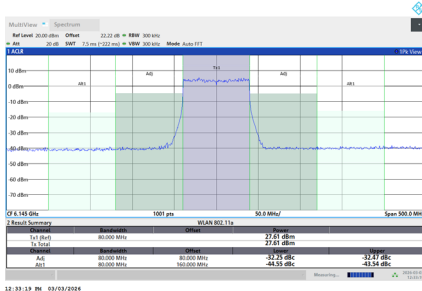

CH55

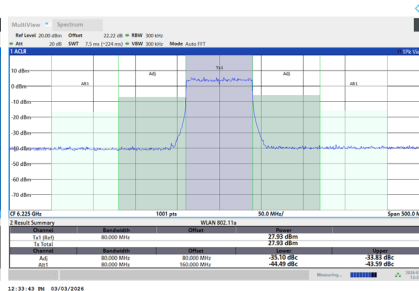


CH87

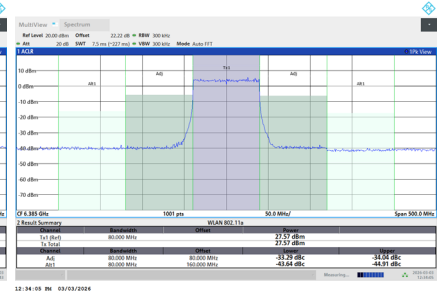


Test Mode: IEEE 802.11be(EHT160)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6185	6345	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-160	34.96	34.73	dB	Limit ≥ 25 dB
	+160	34.90	34.93	dB	Limit ≥ 25 dB
	-320	41.78	41.16	dB	Limit ≥ 40 dB
	+320	40.60	41.60	dB	Limit ≥ 40 dB

CH47

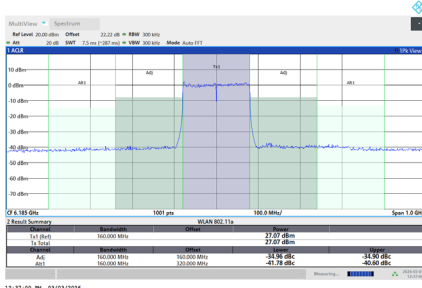


CH79

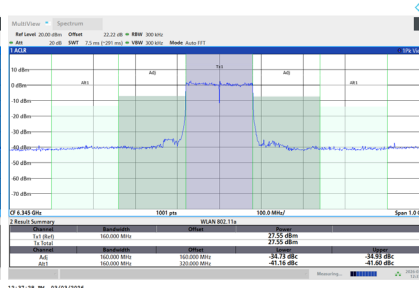

Test Mode: IEEE 802.11be(EHT320)

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6265	-	Low/Mid/High of test frequency range
Adjacent Channel	-320	36.17	dB	Limit ≥ 25 dB
Emitted Power	+320	33.32	dB	Limit ≥ 25 dB

CH63

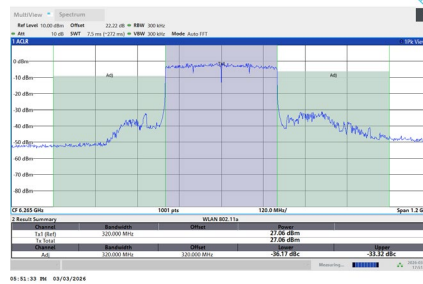


Horizontal Antenna


Test Mode: IEEE 802.11ax(HE20)

Test Voltage		Normal Voltage				Remarks
Test Frequency	MHz	6115	6175	6415	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	27.66	28.56	28.29	dB	Limit ≥ 25 dB
	+20	29.82	26.64	28.43	dB	Limit ≥ 25 dB
	-40	46.24	44.20	45.40	dB	Limit ≥ 40 dB
	+40	46.23	44.38	45.06	dB	Limit ≥ 40 dB


CH33

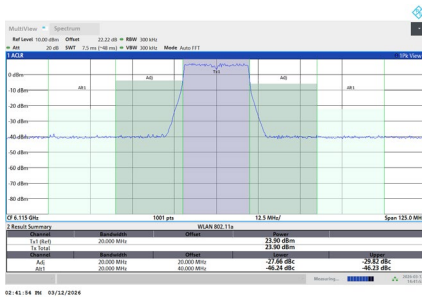

CH45

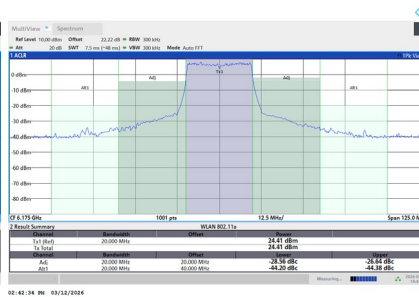

CH93

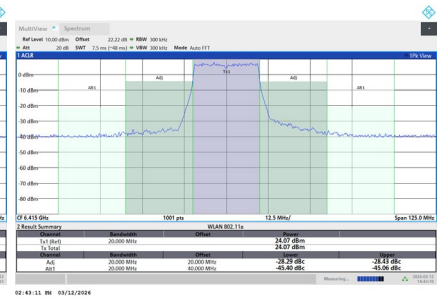


Test Mode: IEEE 802.11ax(HE40)

Test Voltage		Normal Voltage				Remarks
Test Frequency	MHz	6125	6165	6405	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	31.88	32.02	31.82	dB	Limit ≥ 25 dB
	+40	34.20	30.44	33.04	dB	Limit ≥ 25 dB
	-80	43.94	43.51	43.39	dB	Limit ≥ 40 dB
	+80	43.48	43.36	43.24	dB	Limit ≥ 40 dB


CH35



CH43

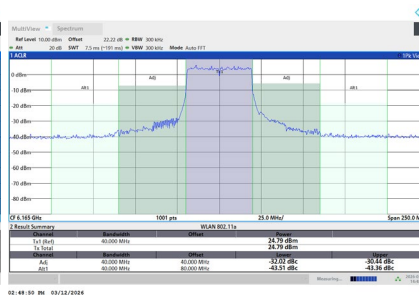


CH91

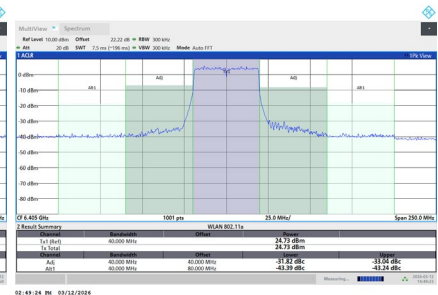


Test Mode: IEEE 802.11ax(HE80)

Test Voltage		Normal Voltage				Remarks
Test Frequency	MHz	6145	6225	6385	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	33.11	33.70	31.25	dB	Limit ≥ 25 dB
	+80	34.26	30.30	33.37	dB	Limit ≥ 25 dB
	-160	45.60	44.07	40.70	dB	Limit ≥ 40 dB
	+160	44.29	43.31	41.82	dB	Limit ≥ 40 dB

CH39

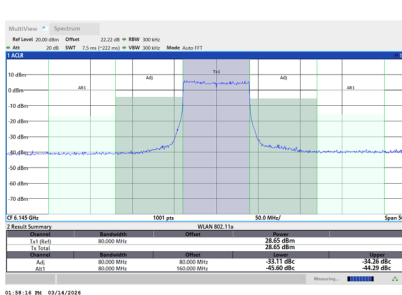

CH55

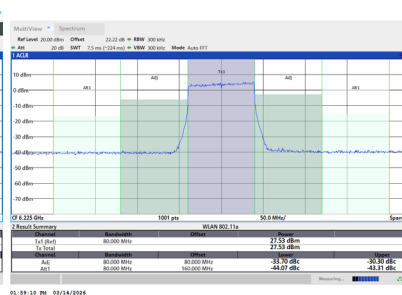


CH87




Test Mode: IEEE 802.11ax(HE160)

Test Voltage		Normal Voltage				Remarks
Test Frequency	MHz	6185	6345	-	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-160	35.82	34.71	dB		Limit ≥ 25 dB
	+160	35.66	36.22	dB		Limit ≥ 25 dB
	-320	48.22	46.34	dB		Limit ≥ 40 dB
	+320	46.07	46.60	dB		Limit ≥ 40 dB

CH47

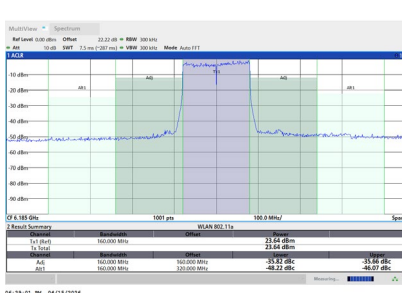

CH79

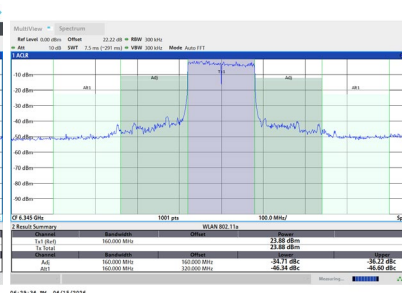

Test Mode: IEEE 802.11be(EHT20)

Test Voltage		Normal Voltage				Remarks
Test Frequency	MHz	6115	6175	6415	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	27.97	27.35	28.20	dB	Limit ≥ 25 dB
	+20	28.58	27.03	27.33	dB	Limit ≥ 25 dB
	-40	46.13	43.75	44.65	dB	Limit ≥ 40 dB
	+40	45.96	43.48	44.40	dB	Limit ≥ 40 dB


CH33



CH45



CH93

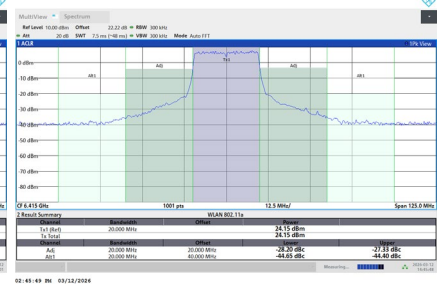


Test Mode: IEEE 802.11be(EHT40)

Test Voltage		Normal Voltage				Remarks
Test Frequency	MHz	6125	6165	6405	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	31.86	31.71	31.92	dB	Limit ≥ 25 dB
	+40	34.04	32.03	32.04	dB	Limit ≥ 25 dB
	-80	44.06	42.57	43.04	dB	Limit ≥ 40 dB
	+80	43.57	42.96	43.26	dB	Limit ≥ 40 dB


CH35



CH43

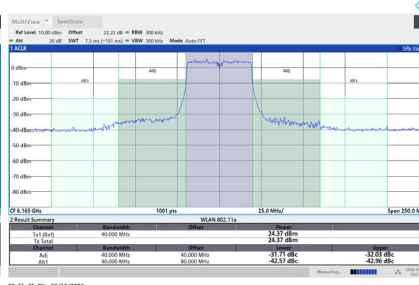


CH91

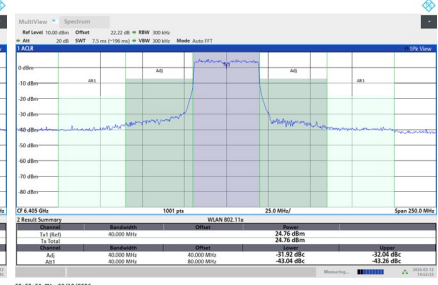


Test Mode: IEEE 802.11be(EHT80)

Test Voltage		Normal Voltage				Remarks
Test Frequency	MHz	6145	6225	6385	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	32.73	33.43	32.86	dB	Limit ≥ 25 dB
	+80	32.55	31.34	33.73	dB	Limit ≥ 25 dB
	-160	45.44	44.13	41.13	dB	Limit ≥ 40 dB
	+160	43.29	43.21	42.25	dB	Limit ≥ 40 dB


CH39

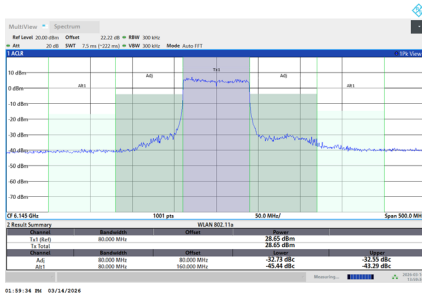

CH55

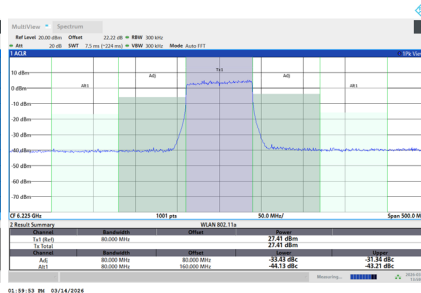


CH87

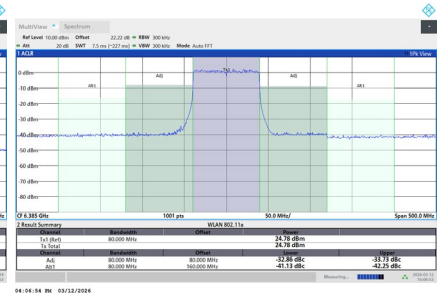


Test Mode: IEEE 802.11be(EHT160)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6185	6345	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-160	35.85	33.27	dB	Limit ≥ 25 dB
	+160	33.12	34.39	dB	Limit ≥ 25 dB
	-320	48.36	43.39	dB	Limit ≥ 40 dB
	+320	45.30	44.33	dB	Limit ≥ 40 dB

CH47

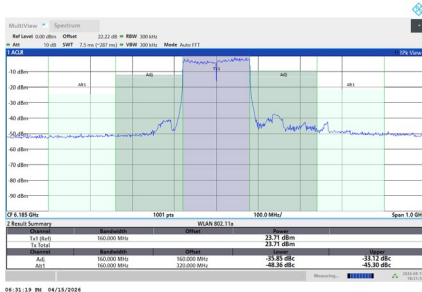


CH79

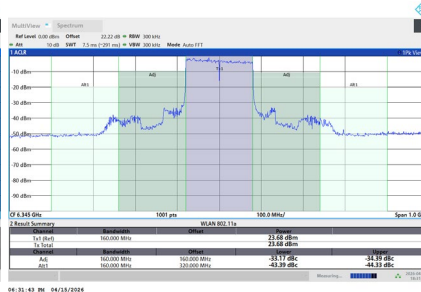

Test Mode:	IEEE 802.11be(EHT320)
------------	-----------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6265	-	Low/Mid/High of test frequency range
Adjacent Channel	-320	33.75	dB	Limit ≥ 25 dB
Emitted Power	+320	33.07	dB	Limit ≥ 25 dB

CH63

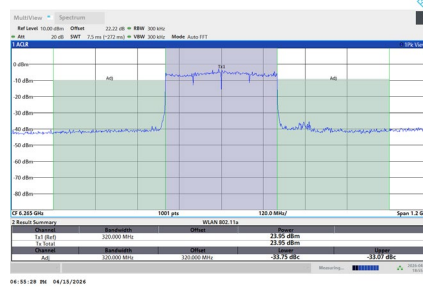

APPENDIX F - LIMITATION OF COLLATERAL EMISSION OF RECEIVER

Vertical Antenna

Test Mode: IEEE 802.11ax(HE20)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6115	6175	6415	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	73.65	38.73	895.240	Limit $\leq$ 4 nW (-54 dBm)
	nW	0.0033	0.0028	0.0027	
	MHz	6400.00	21950.00	21975.00	Limit $\leq$ 20 nW (-47 dBm)
	nW	0.1766	0.1733	0.2023	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = $10 \log (\text{Ant X})$

X = the total number of antennas


CH33

CH45
 $f < 1\text{GHz}$

CH93

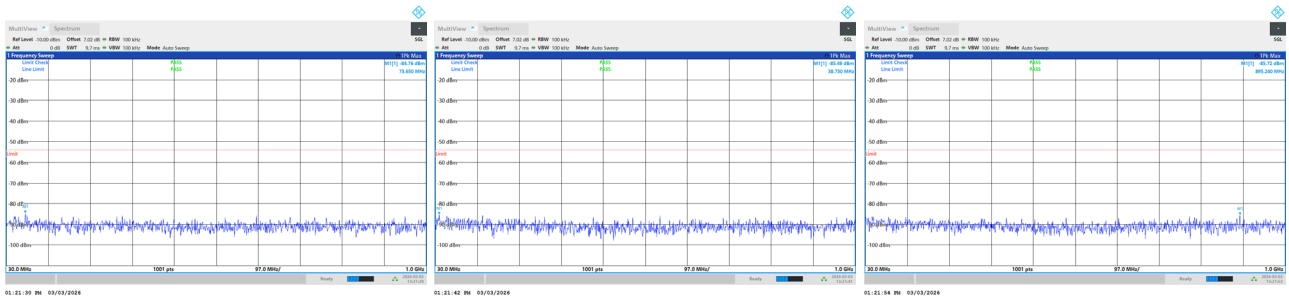

$f \geq 1\text{GHz}$

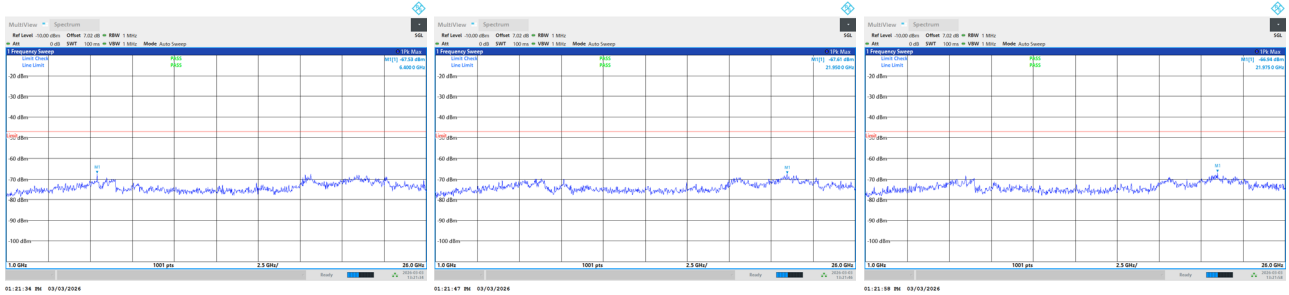

Test Mode: IEEE 802.11ax(HE40)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6125	6165	6405	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	59.10	39.97	172.59	Limit ≤ 4 nW (-54 dBm)
	nW	0.0030	0.0028	0.0027	
	MHz	19225.00	21850.00	21725.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.1730	0.1574	0.1556	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = 10 log (Ant X)

X = the total number of antennas


CH35

CH43
f < 1GHz

CH91

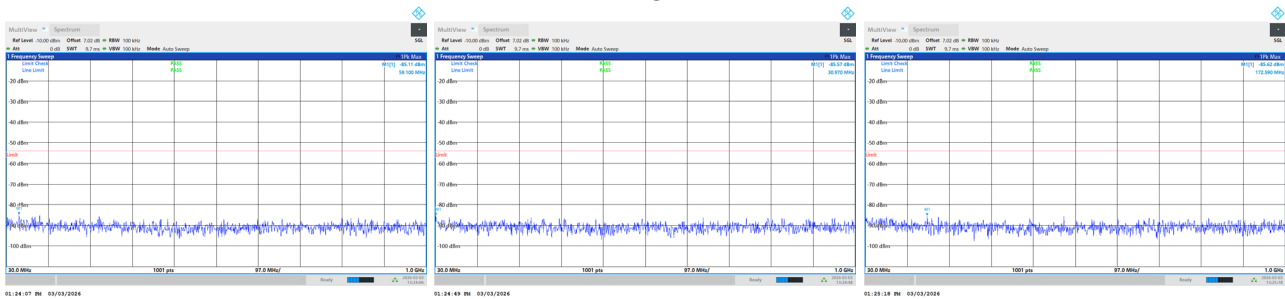

f ≥ 1GHz

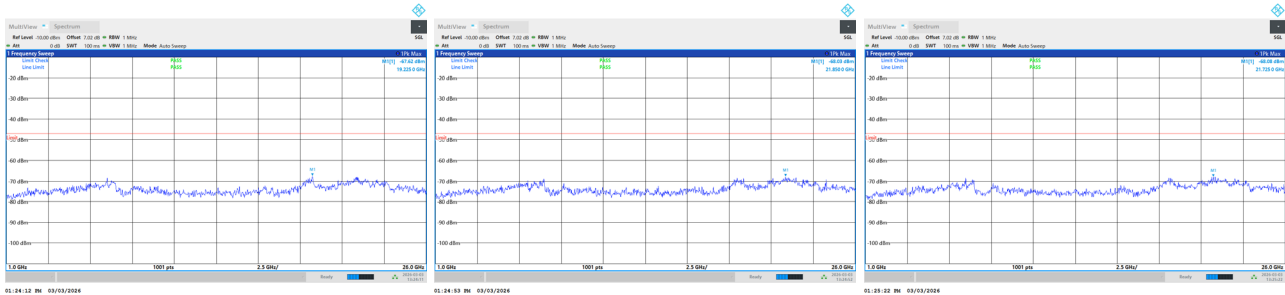

Test Mode: IEEE 802.11ax(HE80)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6145	6225	6385	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	106.63	37.76	136.70	Limit ≤ 4 nW (-54 dBm)
	nW	0.0027	0.0029	0.0037	
	MHz	21925.00	22075.00	21950.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.1626	0.2148	0.2037	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = 10 log (Ant X)

X = the total number of antennas


CH39

CH55
f < 1GHz

CH87

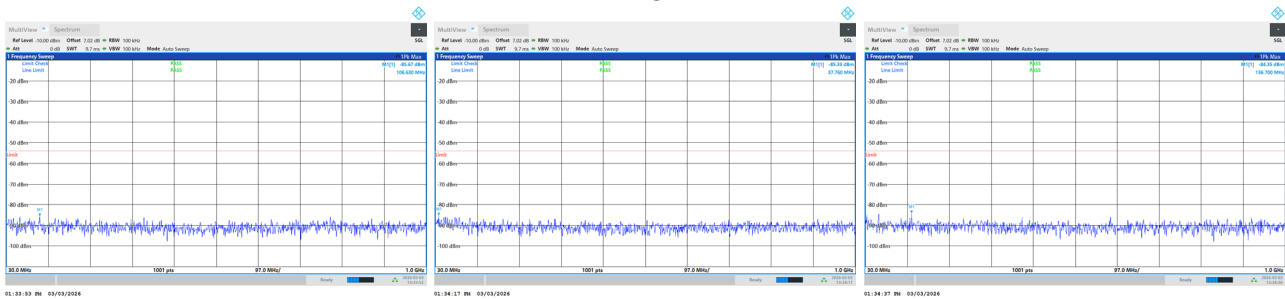

f ≥ 1GHz

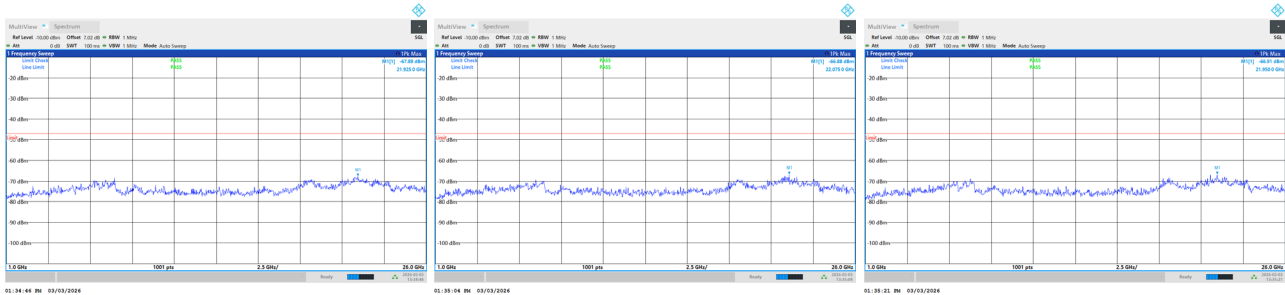

Test Mode: IEEE 802.11ax(HE160)

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6185	6345	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	73.65	50.37	Limit ≤ 4 nW (-54 dBm)
	nW	0.0028	0.0034	
	MHz	21550.00	21725.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.1607	0.2113	

Note:


Emission value = SA measurement value + Directional gain + cable loss

Directional gain = $10 \log (\text{Ant X})$


X = the total number of antennas

CH47

CH79
 $f < 1\text{GHz}$

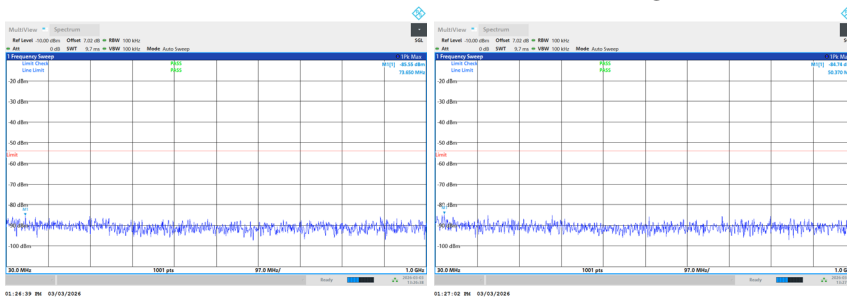

$f \geq 1\text{GHz}$

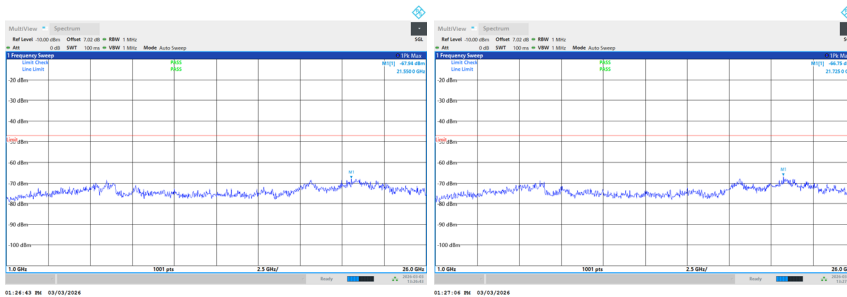

Test Mode: IEEE 802.11be(EHT20)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6115	6175	6415	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	125.06	95.960	72.68	Limit ≤ 4 nW (-54 dBm)
	nW	0.0030	0.0029	0.0030	
	MHz	21825.00	21975.00	19050.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.2178	0.1633	0.2018	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = $10 \log (\text{Ant X})$

X = the total number of antennas


CH33

CH45
 $f < 1\text{GHz}$

CH93

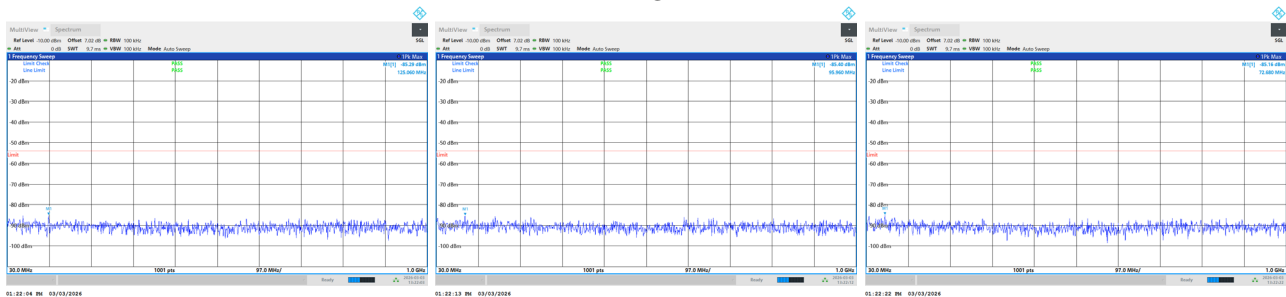

$f \geq 1\text{GHz}$

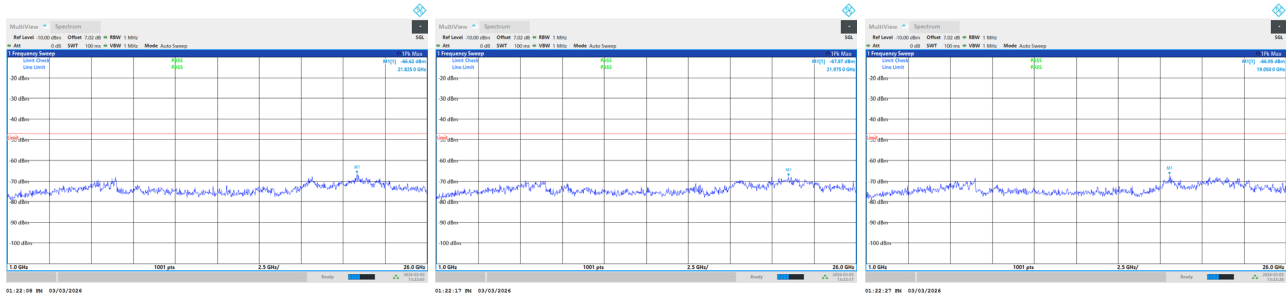

Test Mode: IEEE 802.11be(EHT40)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6125	6165	6405	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	149.31	51.34	59.10	Limit ≤ 4 nW (-54 dBm)
	nW	0.0032	0.0032	0.0036	
	MHz	21850.00	22500.00	21975.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.1840	0.1905	0.2123	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = 10 log (Ant X)

X = the total number of antennas


CH35

CH43
f < 1GHz

CH91

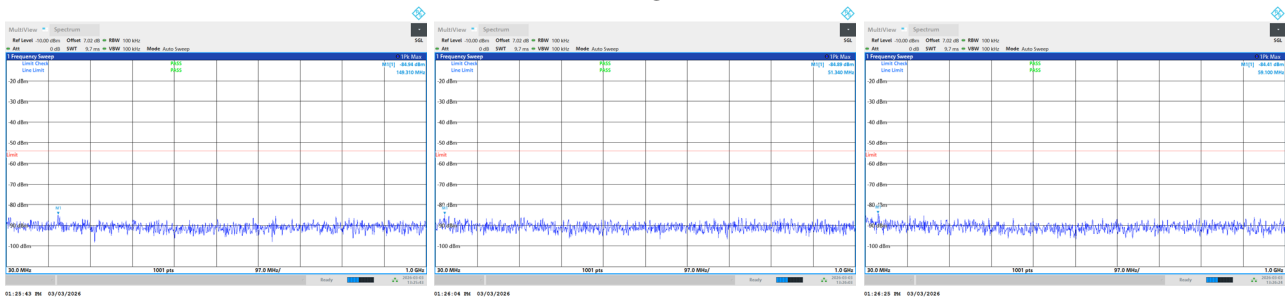

f ≥ 1GHz

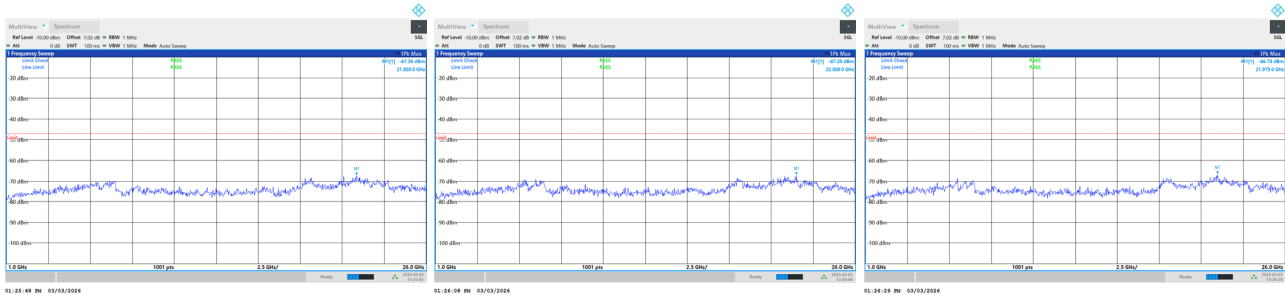

Test Mode: IEEE 802.11be(EHT80)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6145	6225	6385	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	225.94	91.11	367.56	Limit ≤ 4 nW (-54 dBm)
	nW	0.0030	0.0031	0.0039	
	MHz	21900.00	22025.00	21650.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.1936	0.1936	0.1977	

Note:

Emission value = SA measurement value + Directional gain + cable loss




Directional gain = $10 \log (\text{Ant X})$

X = the total number of antennas




CH39

CH55
f < 1GHz

CH87

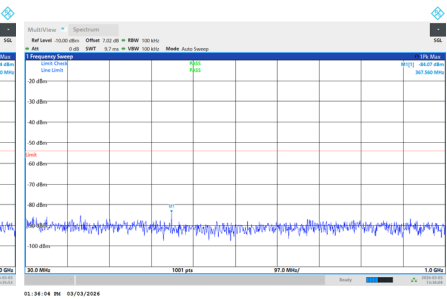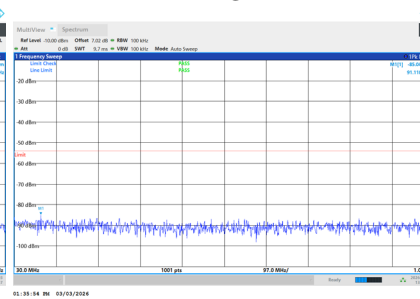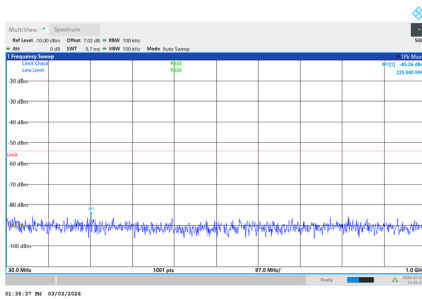

f ≥ 1GHz

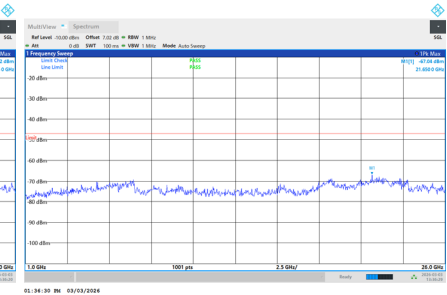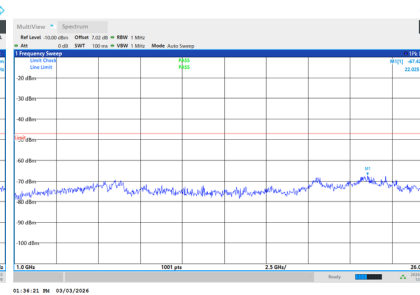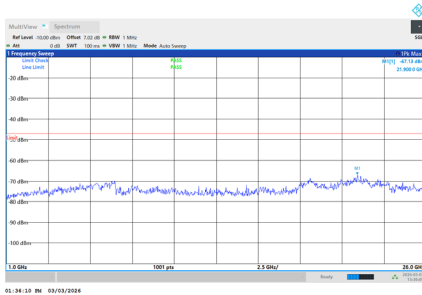

Test Mode: IEEE 802.11be(EHT160)

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6185	6345	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	958.29	744.89	Limit ≤ 4 nW (-54 dBm)
	nW	0.0029	0.0035	
	MHz	21875.00	21825.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.1671	0.2104	

Note:


Emission value = SA measurement value + Directional gain + cable loss

Directional gain = $10 \log (\text{Ant X})$


X = the total number of antennas

CH47

CH79
 $f < 1\text{GHz}$

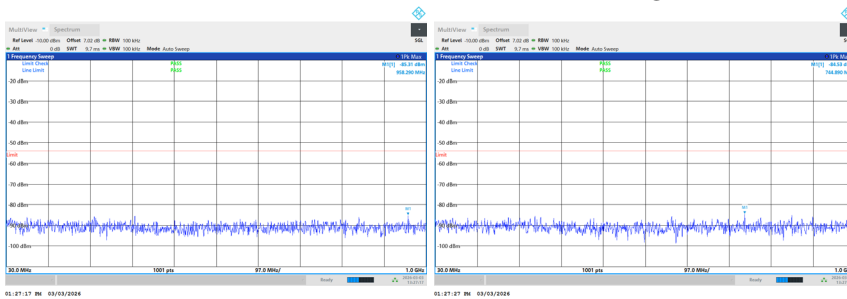

$f \geq 1\text{GHz}$

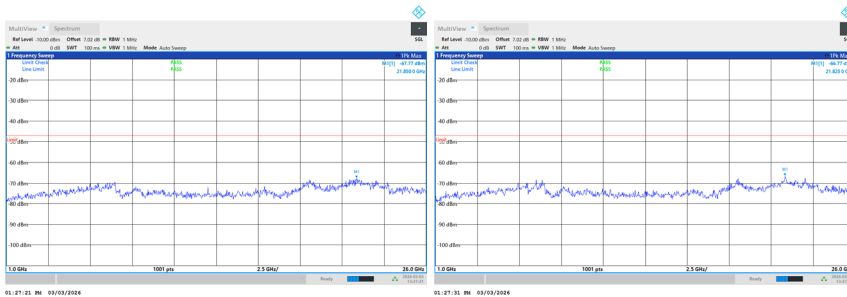

Test Mode: IEEE 802.11be(EHT320)

Test Voltage		Normal Voltage	Remarks
Test Frequency	MHz	6265	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	82.38	Limit ≤ 4 nW (-54 dBm)
	nW	0.0045	
	MHz	21925.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.2213	


Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = $10 \log (\text{Ant X})$

X = the total number of antennas

CH63
f < 1GHz

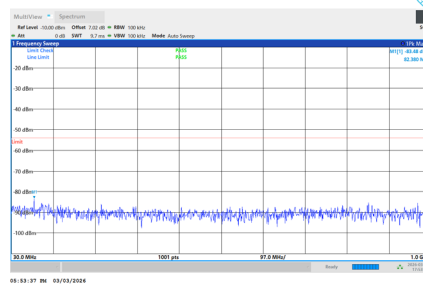

f $\geq$ 1GHz

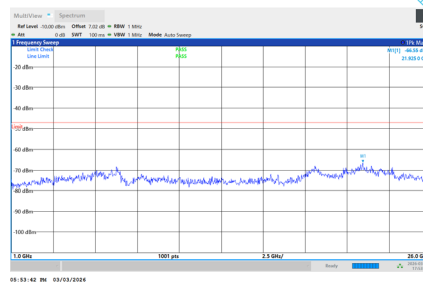

Horizontal Antenna

Test Mode: IEEE 802.11ax(HE20)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6115	6175	6415	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	383.08	281.230	64.920	Limit ≤ 4 nW (-54 dBm)
	nW	0.003	0.002	0.003	
	MHz	21275.00	21325.00	21800.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.153	0.188	0.190	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = 10 log (Ant X)

X = the total number of antennas


CH33

CH45
f < 1GHz

CH93

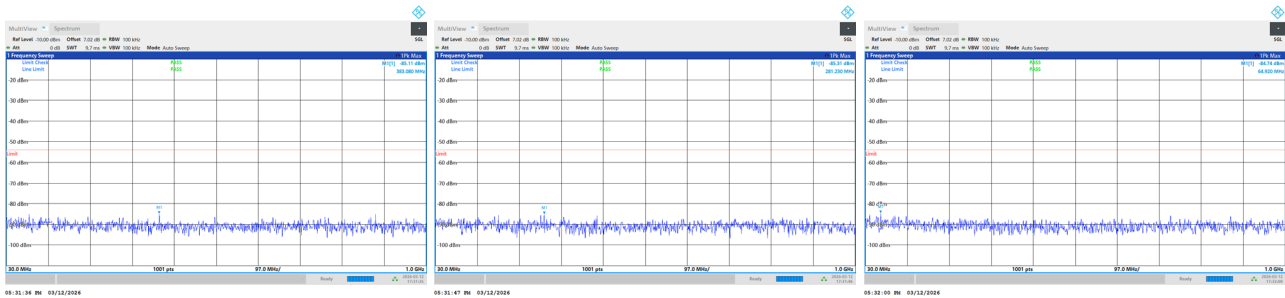

f ≥ 1GHz

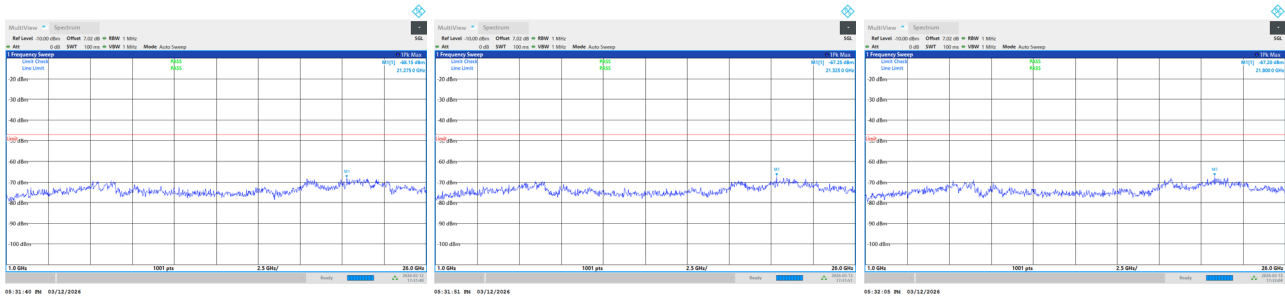

Test Mode: IEEE 802.11ax(HE40)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6125	6165	6405	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	835.10	815.70	156.10	Limit ≤ 4 nW (-54 dBm)
	nW	0.002	0.004	0.003	
	MHz	21725.00	21725.00	21825.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.159	0.207	0.184	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = 10 log (Ant X)

X = the total number of antennas


CH35

CH43
 $f < 1\text{GHz}$

CH91

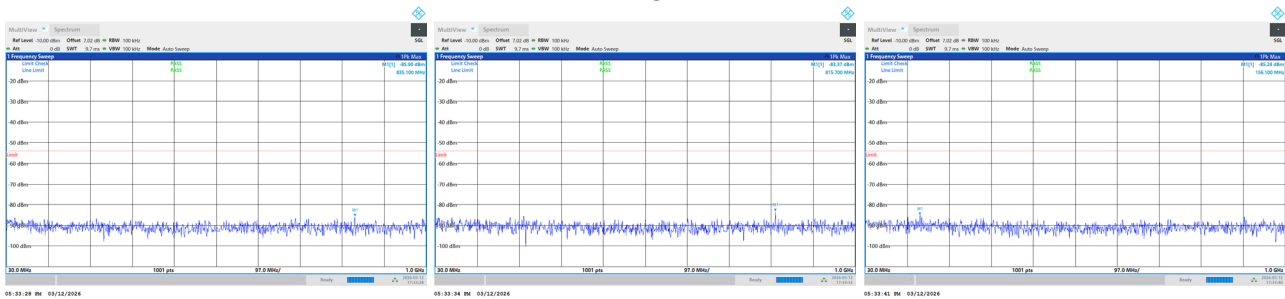

$f \geq 1\text{GHz}$

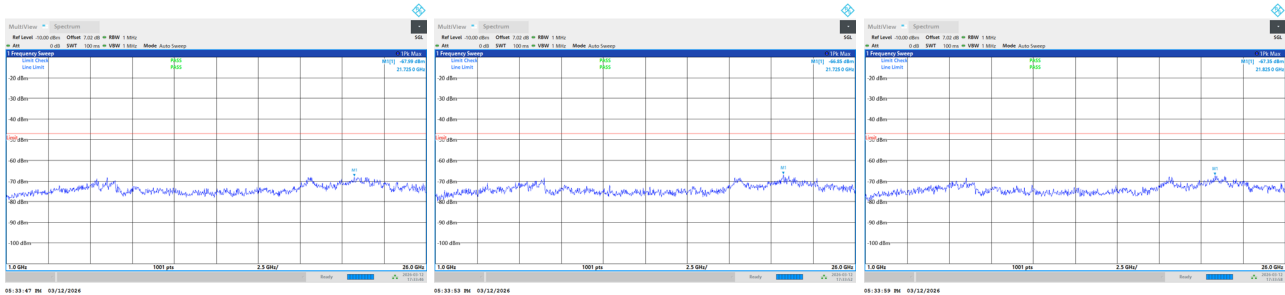

Test Mode: IEEE 802.11ax(HE80)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6145	6225	6385	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	248.25	725.49	287.05	Limit ≤ 4 nW (-54 dBm)
	nW	0.003	0.002	0.002	
	MHz	21825.00	22050.00	19225.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.284	0.204	0.192	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = $10 \log (\text{Ant X})$

X = the total number of antennas


CH39

CH55
 $f < 1\text{GHz}$

CH87

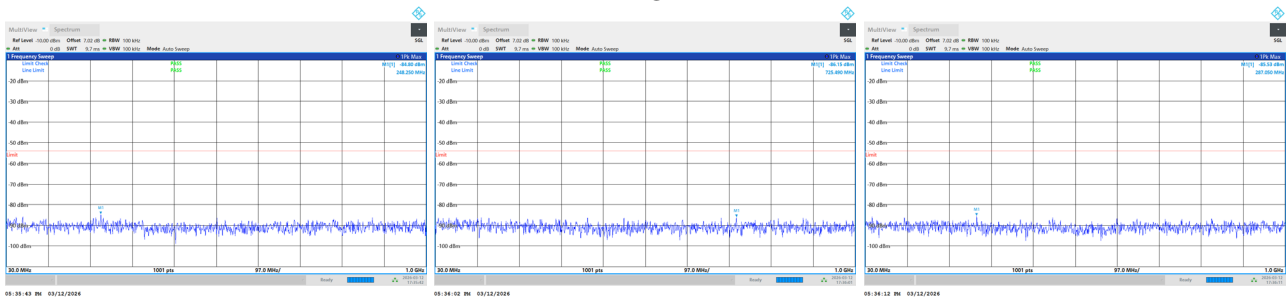

$f \geq 1\text{GHz}$

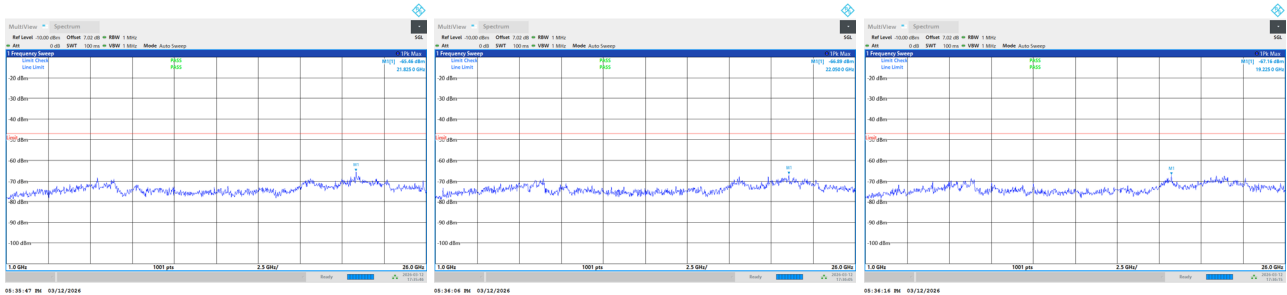

Test Mode: IEEE 802.11ax(HE160)

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6185	6345	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	65.89	801.150	Limit ≤ 4 nW (-54 dBm)
	nW	0.003	0.003	
	MHz	21850.00	7400.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.159	0.210	

Note:


Emission value = SA measurement value + Directional gain + cable loss

Directional gain = $10 \log (\text{Ant X})$


X = the total number of antennas

CH47

CH79
 $f < 1\text{GHz}$

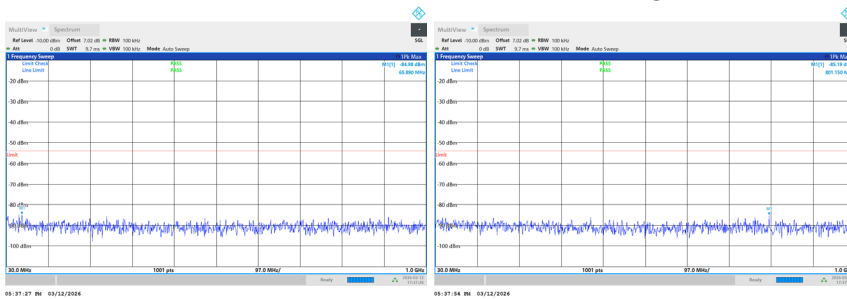

$f \geq 1\text{GHz}$

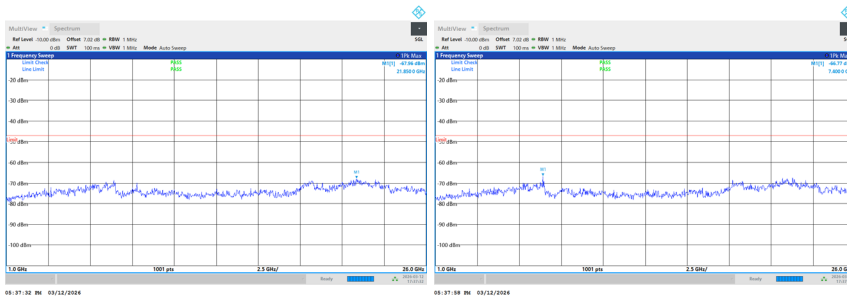

Test Mode: IEEE 802.11be(EHT20)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6115	6175	6415	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	103.72	30.00	31.94	Limit ≤ 4 nW (-54 dBm)
	nW	0.003	0.003	0.002	
	MHz	22350.00	21900.00	18750.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.226	0.174	0.157	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = 10 log (Ant X)

X = the total number of antennas


CH33

CH45
f < 1GHz

CH93

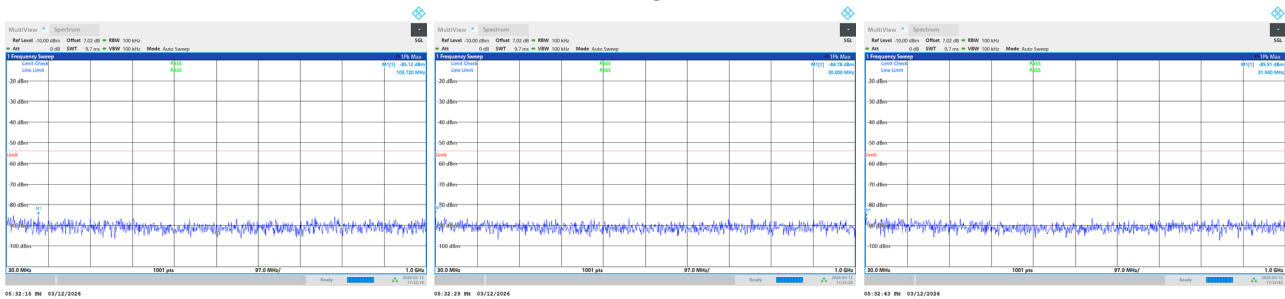

f ≥ 1GHz

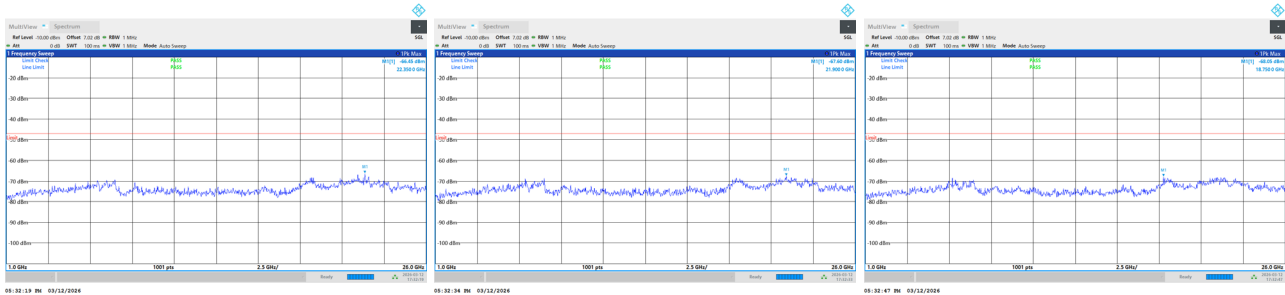

Test Mode: IEEE 802.11be(EHT40)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6125	6165	6405	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	43.58	222.06	49.40	Limit ≤ 4 nW (-54 dBm)
	nW	0.003	0.003	0.004	
	MHz	22400.00	21975.00	21900.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.153	0.236	0.214	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = 10 log (Ant X)

X = the total number of antennas


CH35

CH43
f < 1GHz

CH91

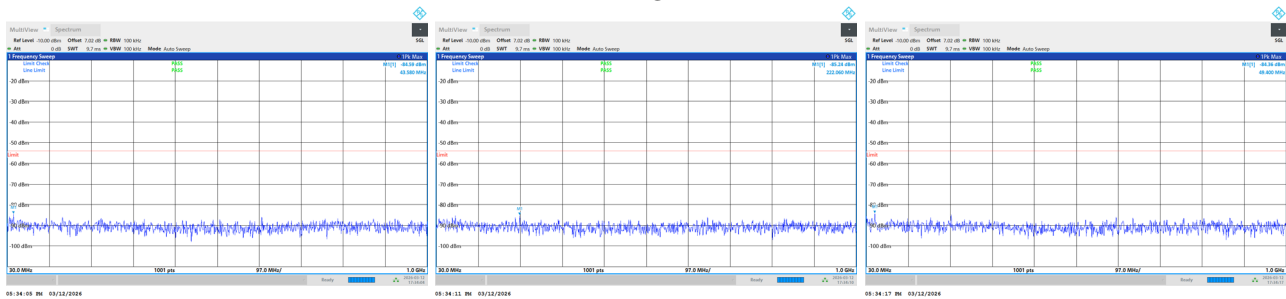

f ≥ 1GHz

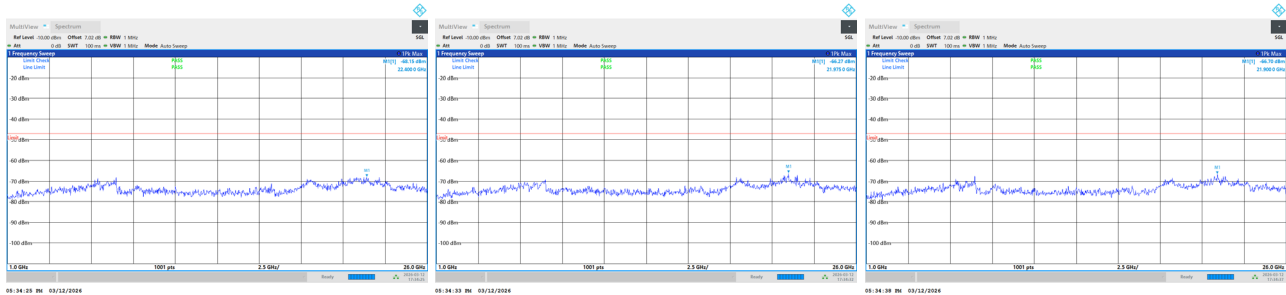

Test Mode: IEEE 802.11be(EHT80)

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6145	6225	6385	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	710.94	127.97	79.470	Limit ≤ 4 nW (-54 dBm)
	nW	0.004	0.002	0.003	
	MHz	21900.00	22375.00	21575.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.176	0.173	0.190	

Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = 10 log (Ant X)

X = the total number of antennas


CH39

CH55
f < 1GHz

CH87

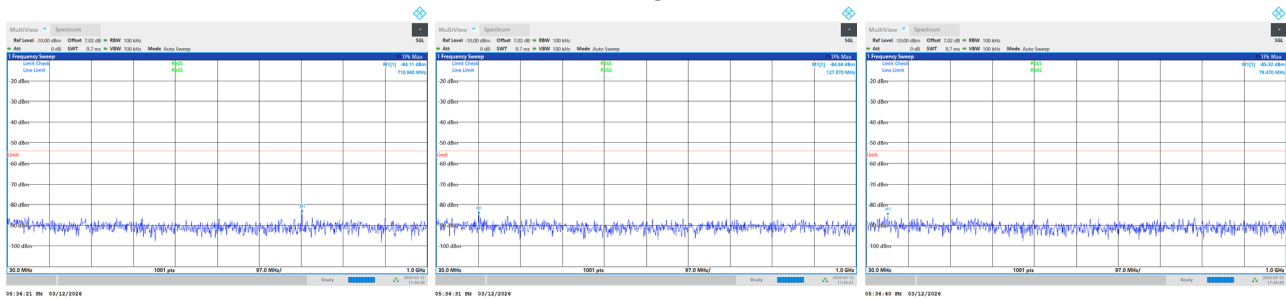

f ≥ 1GHz

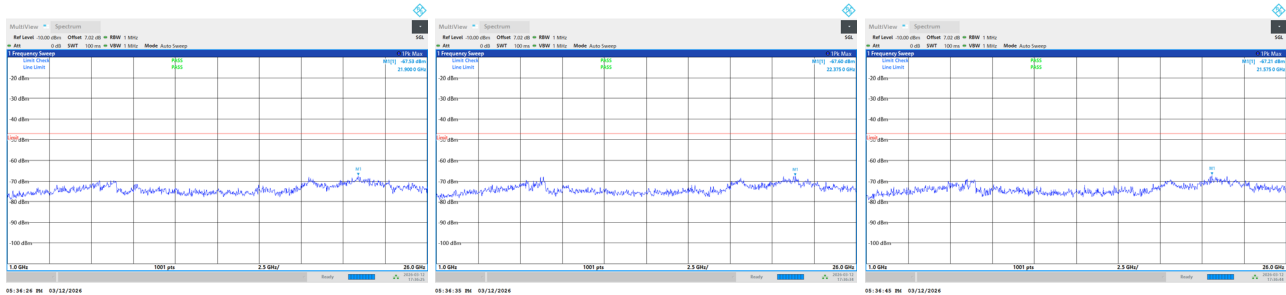

Test Mode: IEEE 802.11be(EHT160)

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6185	6345	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	34.85	361.74	Limit ≤ 4 nW (-54 dBm)
	nW	0.003	0.003	
	MHz	23050.00	21725.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.162	0.176	

Note:


Emission value = SA measurement value + Directional gain + cable loss

Directional gain = $10 \log (\text{Ant X})$


X = the total number of antennas

CH47

CH79
 $f < 1\text{GHz}$

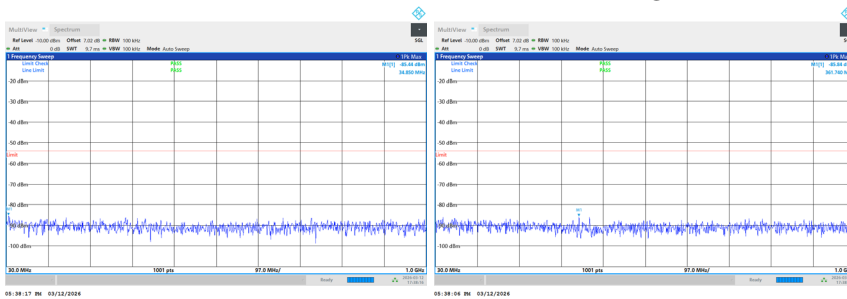

$f \geq 1\text{GHz}$

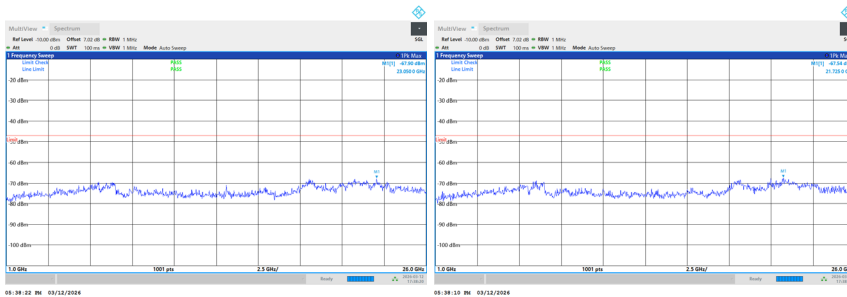

Test Mode: IEEE 802.11be(EHT320)

Test Voltage		Normal Voltage	Remarks
Test Frequency	MHz	6265	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	921.43	Limit ≤ 4 nW (-54 dBm)
	nW	0.002	
	MHz	21975.00	Limit ≤ 20 nW (-47 dBm)
	nW	0.161	


Note:

Emission value = SA measurement value + Directional gain + cable loss


Directional gain = $10 \log (\text{Ant } X)$

X = the total number of antennas

CH63
f < 1GHz

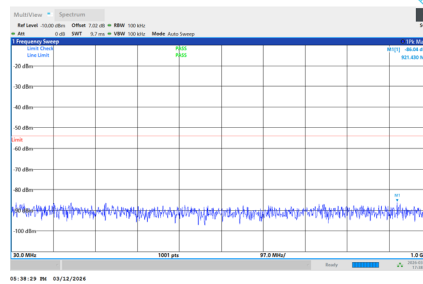

f $\geq$ 1GHz

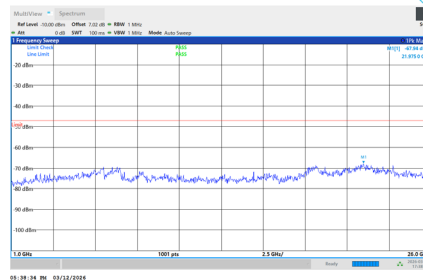

APPENDIX G - TRANSMISSION BURST LENGTH

Vertical Antenna

Test Mode:	IEEE 802.11ax(HE20)
------------	---------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6115	6175	6415	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.442	5.442	5.442	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE40)
------------	---------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6125	6165	6405	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.450	5.450	5.450	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE80)
------------	---------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6145	6225	6385	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.442	5.442	5.442	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE160)
------------	----------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6185	6345	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.445	5.445	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT20)
------------	----------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6115	6175	6415	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.458	5.458	5.458	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT40)
------------	----------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6125	6165	6405	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.450	5.450	5.450	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT80)
------------	----------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6145	6225	6385	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.458	5.458	5.458	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT160)
------------	-----------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6185	6345	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.452	5.452	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT320)
------------	-----------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency	MHz	6265	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.452	Limit ≤ 8msec

Horizontal Antenna

Test Mode:	IEEE 802.11ax(HE20)
------------	---------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6115	6175	6415	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.448	5.448	5.448	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE40)
------------	---------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6125	6165	6405	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.446	5.446	5.446	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE80)
------------	---------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6145	6225	6385	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.446	5.446	5.446	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE160)
------------	----------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6185	6345	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.442	5.442	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT20)
------------	----------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6115	6175	6415	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.450	5.450	5.450	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT40)
------------	----------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6125	6165	6405	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.455	5.455	5.455	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT80)
------------	----------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6145	6225	6385	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.446	5.446	5.446	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT160)
------------	-----------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6185	6345	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.450	5.450	Limit ≤ 8msec

Test Mode:	IEEE 802.11be(EHT320)
------------	-----------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency	MHz	6265	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.456	Limit ≤ 8msec

APPENDIX H - CARRIER SENSE CAPABILITY

Vertical Antenna&Horizontal Antenna

Test Mode:	IEEE 802.11ax(HE20)
------------	---------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6115	6175	6415	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE40)
------------	---------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6125	6165	6405	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE80)
------------	---------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6145	6225	6385	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE160)
------------	----------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6185	6345	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT20)
------------	----------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6115	6175	6415	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT40)
------------	----------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6125	6165	6405	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT80)
------------	----------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	6145	6225	6385	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT160)
------------	-----------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	6185	6345	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11be(EHT320)
------------	-----------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency	MHz	6265	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

End of Test Report