

NCC RADIO TEST REPORT

Product name	CREATIVE OUTLIER GOLD V2
Applicant	Asia Institute Technology Limited
Manufacture	CREATIVE LABS PTE. LTD.
Rating(s)	DC 3.7V (Battery Supplied)
Trademark	CREATIVE
Model and/or type reference	EF0910
Standard	LP0002:2018
Test Result	PASS

Date of receipt: 07-23-2020

Date of Issue: 08-31-2020

signature :



NCC RADIO TEST REPORT

Report Reference No. M200723N3-1

Compiled by (+ signature)..... Kevin Bothmann

Approved by (+ signature) Jay Gandhi

Date of issue..... 2020-08-31



Applicant's name Asia Institute Technology Limited

Address 3F., No.446, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City, 23557, Taiwan.

Manufacture's Name CREATIVE LABS PTE. LTD.

Address 31 International Business Park, #03-01, Singapore 609921.

Test specification:

Standard LP0002: 2018

Test procedure EIA 603、ANSI、FCC/47 CFR/2.1046、2.1047、2.1049、2.1051、2.1053 and 2.1055

Non-standard test method... N/A

Test item description

Product name : CREATIVE OUTLIER GOLD V2

Model and/or type reference : EF0910

Rating(s)..... : DC 3.7V (Battery Supplied)

Testing Laboratory information:

Testing Laboratory Name : Electro Magnetic Test, Inc.

Address : 1547 Plymouth Street, Mountain View, CA 94043

CAB Identifier Number : US0036

Tel...... : (650) 965-4000

Fax : (650) 965-3000

E-mail : jgandhi@emtlabs.com

Testing.....

Date of receipt of test item Jul. 23, 2020

Date (s) of performance of tests..... Jul. 23~Aug. 28, 2020

Date of Issue..... Aug. 31, 2020

Test Result..... **Pass**

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Electro Magnetic Test, Inc., which is an independent testing and consulting firm. The test report is based on testing performed Electro Magnetic Test, Inc. personnel according to the measurement procedure described in the test specification given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Federal Government.

Electro Magnetic Test, Inc. is recognized by the following agencies for performing EMI/EMC testing:

COUNTRY	AGENCY	IDENTIFYING #
USA	Federal Communications Commission (FCC) (EMT's test site is recognized by the FCC)	Registration Number: 90576
USA, Canada, Taiwan, Australia/New Zealand, European Community	National Voluntary Lab Accreditation Program (NVLAP) (EMT is accredited by NVLAP. A copy of the NVLAP Scope Of Accreditation is available upon request.)	Lab Code: 200147-0
Canada	Industry Canada	File No.: IC 2804
Japan	Voluntary Control Council For Interference (VCCI)	See Below
	Open Field Test Site "A"	R-589
	Mains Conducted Emissions Test Site "A"	C-604
	Telecom Conducted Emissions Test Site "A"	T-1655
	3 Meter Semi-Anechoic Chamber Site "E"	R-3227
	3 Meter Semi-Anechoic Chamber Site "E" (1GHz – 6GHz)	G-219
	Mains Conducted Emissions Test Site "E"	C-35793
	Telecom Conducted Emissions Test Site "E"	T-1715
Korea	Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (A copy of the Scope Of Accreditation is available upon request)	US0036
Taiwan	Bureau Of Standards, Metrology and Inspection (BSMI)	Reference Number: SL2-IN-E-1024
Australia / New Zealand	Australian Communications Authority (AUSTEL)	*

***THESE AGENCIES DO NOT ISSUE AN IDENTIFYING NUMBER TO TEST LABS.**

Table of Contents	Page
GENERAL REPORT SUMMARY	3
1 . SUMMARY OF TEST RESULTS	6
1.1 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	10
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
3.1.2 TEST PROCEDURE	16
3.1.3 DEVIATION FROM TEST STANDARD	16
3.1.4 TEST SETUP	16
3.1.5 TEST RESULTS	17
3.2 RADIATED EMISSION MEASUREMENT	19
3.2.1 RADIATED EMISSION LIMITS	19
3.2.2 TEST PROCEDURE	20
3.2.3 TEST SETUP	21
3.2.4 EUT OPERATING CONDITIONS	21
3.2.5 TEST RESULTS (BELOW 30 MHZ)	22
3.2.6 TEST RESULTS (BETWEEN30 – 1000 MHZ)	22
3.2.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	55
4 . OCCUPIED BANDWIDTH TEST	65
4.1 APPLIED PROCEDURES / LIMIT	65
4.1.1 TEST PROCEDURE	65
4.1.2 TEST SETUP	65
4.1.3 EUT OPERATION CONDITIONS	65
4.1.4 TEST RESULTS	66
5 . NUMBER OF HOPPING CHANNEL	70
5.1 APPLIED PROCEDURES / LIMIT	70
5.1.1 TEST PROCEDURE	70
5.1.2 TEST SETUP	70
5.1.3 EUT OPERATION CONDITIONS	70

Table of Contents	Page
5.1.4 TEST RESULTS	71
6 . AVERAGE TIME OF OCCUPANCY	73
6.1 APPLIED PROCEDURES / LIMIT	73
6.1.1 TEST PROCEDURE	73
6.1.2 TEST SETUP	74
6.1.3 EUT OPERATION CONDITIONS	74
6.1.4 TEST RESULTS	75
7 . HOPPING CHANNEL SEPARATION MEASUREMENT	79
7.1 APPLIED PROCEDURES / LIMIT	79
7.1.1 TEST PROCEDURE	79
7.1.2 TEST SETUP	79
7.1.3 EUT OPERATION CONDITIONS	79
7.1.4 TEST RESULTS	80
8 . PEAK OUTPUT POWER TEST	84
8.1 APPLIED PROCEDURES / LIMIT	84
8.1.1 TEST PROCEDURE	84
8.1.2 DEVIATION FROM STANDARD	84
8.1.3 TEST SETUP	84
8.1.4 EUT OPERATION CONDITIONS	84
8.1.5 TEST RESULTS	85
9 . ANTENNA CONDUCTED SPURIOUS EMISSION	89
9.1 APPLIED PROCEDURES / LIMIT	89
9.1.1 TEST PROCEDURE	89
9.1.2 TEST SETUP	89
9.1.3 EUT OPERATION CONDITIONS	89
9.1.4 TEST RESULTS	90
10. ANTENNA REQUIREMENT	94
10.1 STANDARD REQUIREMENT	94
10.2 EUT ANTENNA	94
11. EUT TEST PHOTO	95

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

LP0002 : 2018			
Standard Section	Test Item	Judgment	Remark
2.3	Conducted Emission	PASS	None
3.10.1(5)/2.8	Radiated Spurious Emission	PASS	None
3.10.1(2)	Peak Output Power	PASS	None
3.10.1(6.1.1)	Occupied Bandwidth	PASS	None
3.10.1(6.1.1)	Hopping Channel Separation	PASS	None
3.10.1(6.1.2)	Number of Hopping Frequency	PASS	None
3.10.1(6.1.2)	Dwell Time	PASS	None
3.10.1(5)/2.8	Restricted Bands	PASS	None
3.10.1(3)	Antenna Requirement	PASS	None

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report.

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	1.38dB
2	Radiated Emission Test	3.17dB
3	RF power,conducted	0.16dB
4	Spurious emissions,conducted	0.21dB
5	All emissions,radiated(<1G)	4.68dB
6	All emissions,radiated(>1G)	4.89dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	CREATIVE OUTLIER GOLD V2	
Model Name	EF0910	
Trade mark	CREATIVE	
OEM Brand/Model Name	N/A	
Product Description	The EUT is a CREATIVE OUTLIER GOLD V2.	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK(1Mbps) π/4 DQPSK(2Mbps) 8DPSK(3Mbps)
	Number Of Channel	79 CH
	Antenna Designation:	Please see Note 3.
	Antenna Gain(Peak)	-2.69 dBi
	Output Power:	1Mbps Mode: 5.00dBm (Max.)
		3Mbps Mode: 3.41dBm(Max.)
Channel List	Please refer to the Note 2.	
Power Rating	DC 3.7V (Battery Supplied)	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	N/A	
EUT Modification(s)	N/A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3. Table for Filed Antenna

No.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	CREATIVE LABS PTE. LTD	EF0910	LDS Antenna	N/A	-2.69 dBi	Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	1Mbps
Mode 2	2Mbps
Mode 3	3Mbps

For Conducted Emission	
Final Test Mode	Description
Mode 1	CH00 /CH39 /CH78
Mode 3	CH00 /CH39 /CH78

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00 /CH39 /CH78
Mode 3	CH00 /CH39 /CH78

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.


2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	Test program: BTCert.exe		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	G	H	I
Parameters(3Mbps)	R	S	T

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Block diagram of EUT configuration

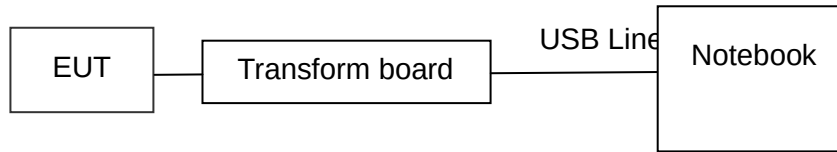

Note: 1. The EUT was used fully-charged battery programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.
 2. Set EUT as above block diagram, run the software, set the transmit serial port/power/channel/packet type/data type/hopping or not, send configuration, then EUT enter the TX mode. After finishing the test setting, the notebook and the transform board will be removed during measurements.

2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	CREATIVE OUTLIER GOLD V2	CREATIVE	EF0910	N/A	N/A	EUT

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	Notebook	ASUS	X401A	X16-96072	N/A	N/A
2	USB Cable	GUANHANG	TYPE C 3.1	N/A	N/A	0.3m/unshielded /detachable
3	Transform board	N/A	N/A	N/A	N/A	N/A
4	SWITCHING ADAPTOR	SAMSUNG	EP-TA20JWS	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” or “with ferrite core”; “NO” means “unshielded” or “without ferrite core”

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

EQUIPMENT TYPE	MANU-FACT URER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
Spectrum Analyzer	Hewlett Packard	8566B	3013A07296	April 29, 2020	1 Year
RF Preselector	Hewlett Packard	85685A	3010A01157	April 29, 2020	1 Year
Quasi-Peak Adapter	Hewlett Packard	85650	2521A00584	April 29, 2020	1 Year
Preamplifier	Com Power	PA-102	1482	April 29, 2020	1 Year
RF Attenuator	Mini-Circuits	CAT-10	Asset #1000	December 8, 2019	1 Year
LISN	Com Power	LI-200	12012	September 10, 2019	1 Year
LISN	Com Power	LI-200	12214	September 10, 2019	1 Year
LISN	Com Power	LI-200	1767	September 10, 2019	1 Year
LISN	Com Power	LI-200	1768	September 10, 2019	1 Year
Biconical Antenna	Com Power	AB-100	01557	December 29, 2019	1 Year
Log Periodic Antenna	Com Power	AL-100	16037	December 22, 2019	1 Year
Horn Antenna	Com Power	AHA-118	711054	December 22, 2019	1 Year
Antenna Mast	Com Power	AM-400	N/A	N/A	N/A
Turntable	Com Power	TT-100	N/A	N/A	N/A
Computer	Dell, Inc.	DHS	DNSV641	N/A	N/A
Printer	Hewlett Packard	C8124A	CN39B2234T	N/A	N/A
Plotter	Hewlett Packard	7470A	2308A96499	N/A	N/A

EMI Test Equipment (Continued)

EQUIPMENT TYPE	MANU-FACT URER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
EMI Receiver	Rohde & Schwarz	ESU40	100127	June 12, 2020	1 Year
BiConiLog Antenna	ETS-Lindgren	3142D	00102183	August 14, 2020	1 Year
Horn Antenna	ETS-Lindgren	3117	00109294	May 6, 2020	1 Year
Preamplifier	Rohde & Schwarz	TS-PR18	100056	June 12, 2020	1 Year
Antenna Mast	ETS-Lindgren	2175	00095727	N/A	N/A
Turntable	ETS-Lindgren	2187-3.0	00118231	N/A	N/A
Computer	Acer	Aspire 8930	85100050123	N/A	N/A
Multi-Function Controller	ETS-Lindgren	2090	00102270	N/A	N/A
Loop Antenna	ARA	PLA-1030/B	1029	May 19, 2020	1 Year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5			66 - 56 *	56 - 46 *	CISPR
0.50 -5.0			56.00	46.00	CISPR
5.0 -30.0			60.00	50.00	CISPR

0.15 -0.5			66 - 56 *	56 - 46 *	LP0002
0.50 -5.0			56.00	46.00	LP0002
5.0 -30.0			60.00	50.00	LP0002

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

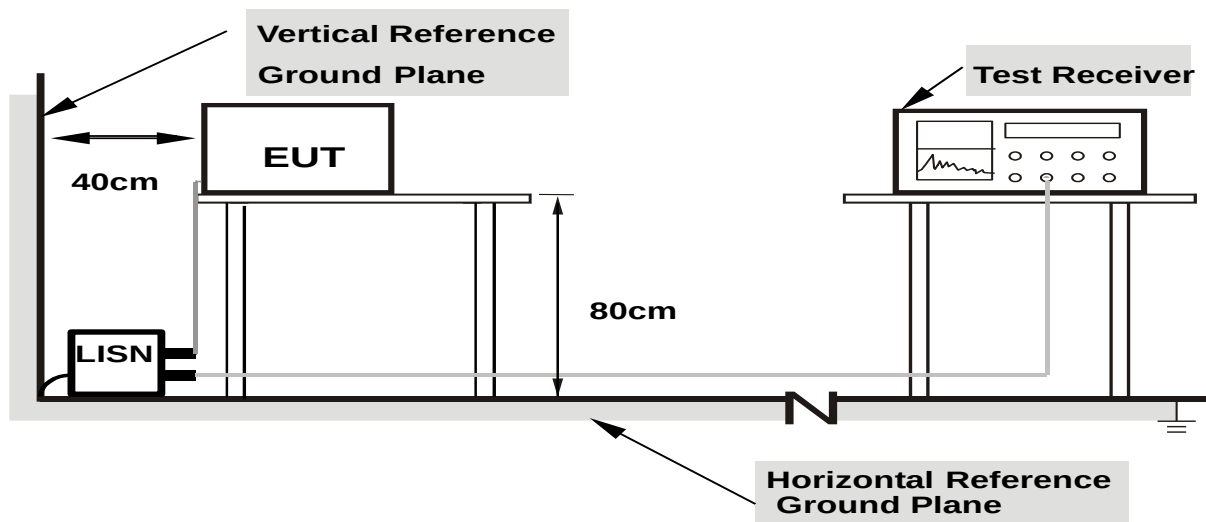

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.1.5 TEST RESULTS

EUT :	CREATIVE OUTLIER GOLD V2	Model Name. :	EF0910
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2020-07-23
Test Mode :	TX (1Mbps) CH00 (worst case)	Phase :	Line
Test Voltage :	DC 5V from adapter, AC 120V/60Hz for adapter		

Frequency	Factor	Meter Reading (dBμV)		Emission Level (dBμV)		Limits (dBμV)		Margin (dB)	
(MHz)	(dB)	QP	Average	QP	Average	QP	Average	QP	Average
0.2580	19.62	34.78	17.84	54.40	37.46	61.50	51.50	-7.10	-14.04
0.2987	19.61	35.78	19.43	55.39	39.04	60.28	50.28	-4.89	-11.24
0.3860	19.57	31.89	21.06	51.46	40.63	58.15	48.15	-6.69	-7.52
0.4500	19.55	33.64	18.03	53.19	37.58	56.88	46.88	-3.69	-9.30
0.9020	19.57	32.46	17.53	52.03	37.10	56.00	46.00	-3.97	-8.90
8.2299	19.96	27.72	12.36	47.68	32.32	60.00	50.00	-12.32	-17.68

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss + Pulse limiter.

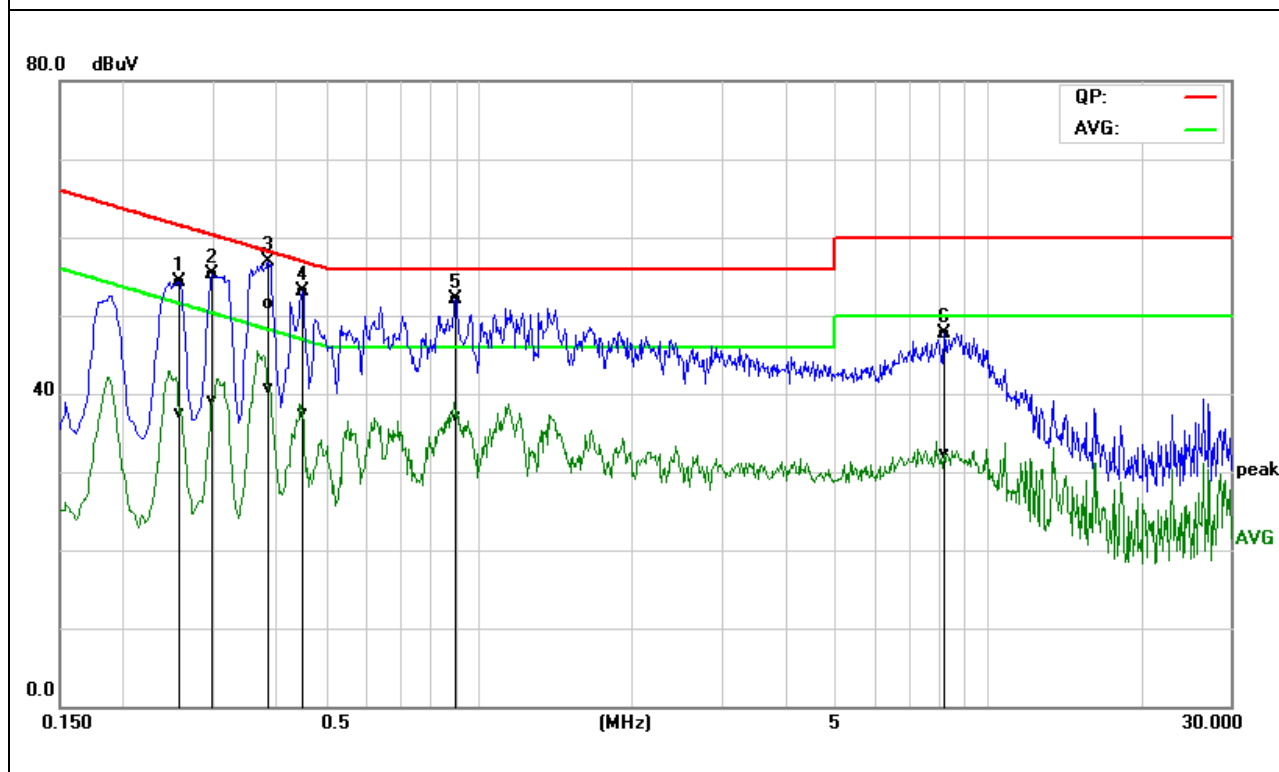


EUT :	CREATIVE OUTLIER GOLD V2	Model Name. :	EF0910
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2020-07-23
Test Mode :	TX (1Mbps) CH00 (worst case)	Phase :	Neutral
Test Voltage :	DC 5V from adapter, AC 120V/60Hz for adapter		

Frequency	Factor	Meter Reading (dBμV)		Emission Level (dBμV)		Limits (dBμV)		Margin (dB)	
(MHz)	(dB)	QP	Average	QP	Average	QP	Average	QP	Average
0.1860	19.53	33.64	17.01	53.17	36.54	64.21	54.21	-11.04	-17.67
0.2980	19.54	32.89	13.78	52.43	33.32	60.30	50.30	-7.87	-16.98
0.3860	19.53	31.83	20.06	51.36	39.59	58.15	48.15	-6.79	-8.56
0.4466	19.53	31.85	15.56	51.38	35.09	56.94	46.94	-5.56	-11.85
0.6060	19.57	31.08	16.00	50.65	35.57	56.00	46.00	-5.35	-10.43
8.7180	20.01	24.28	12.56	44.29	32.57	60.00	50.00	-15.71	-17.43

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss + Pulse limiter.

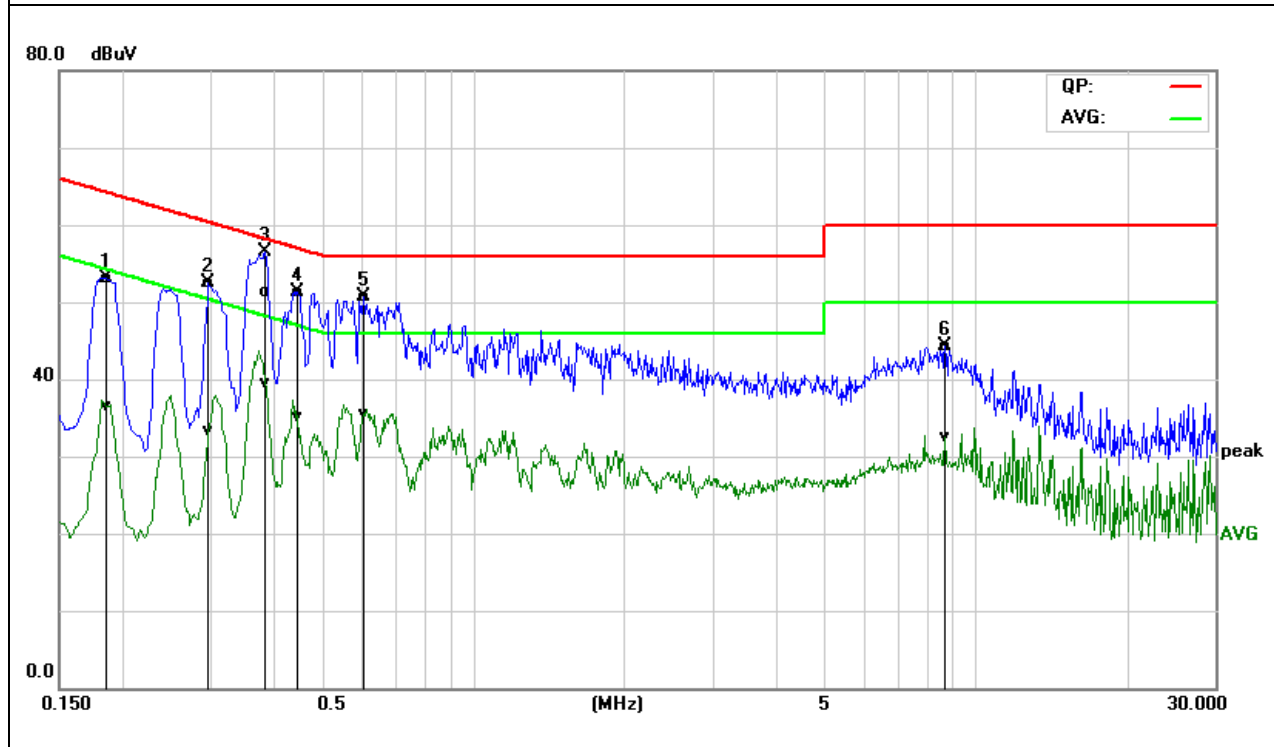

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 2.7, then the 2.8 limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to LP002.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- The field strength of spurious radiation emission was measured in the following position: EUT stand-up position (Y mode) and lie-down position (X, Z mode) the following data show only the worst case setup.
The worst case (X axis) was reported.

3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

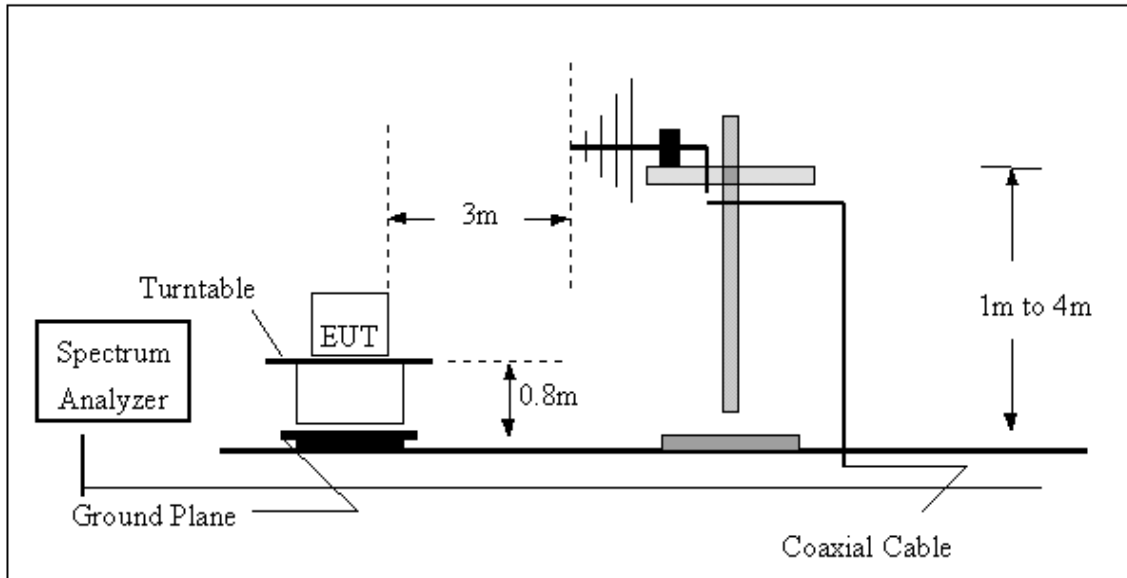

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

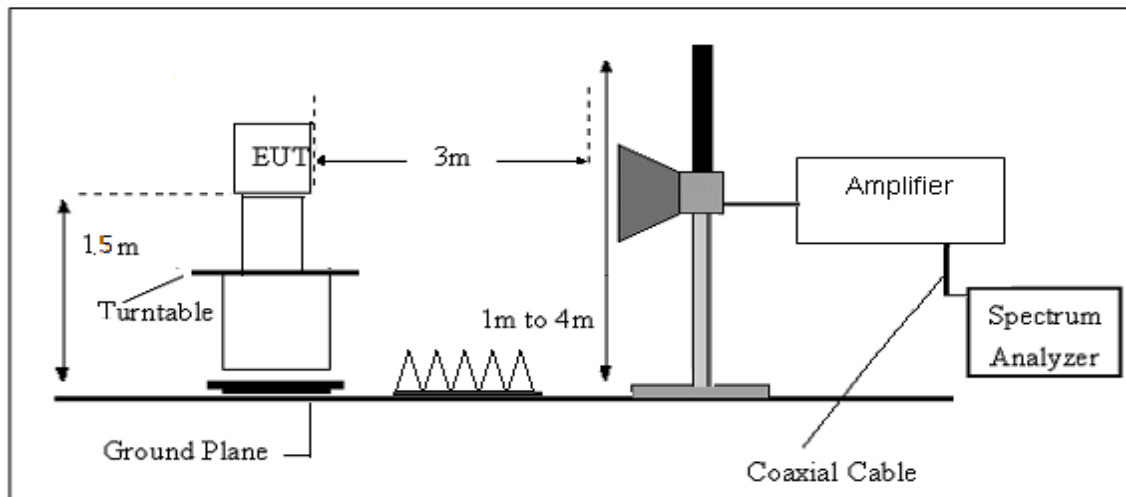

3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 TEST RESULTS (BELOW 30 MHZ)

There is no detected BELOW 30MHz

3.2.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)


Radiated Emissions Test Data Below 1GHz

EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	Normal charging	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
34.5172	50.81	-16.87	33.94	40.00	-6.06	Quasi-Peak
86.8067	39.76	-18.60	21.16	40.00	-18.84	Quasi-Peak
125.0066	40.79	-15.15	25.64	43.50	-17.86	Quasi-Peak
191.7450	44.53	-14.56	29.97	43.50	-13.53	Quasi-Peak
279.0436	44.15	-10.35	33.80	46.00	-12.20	Quasi-Peak
672.8444	35.03	-0.83	34.20	46.00	-11.80	Quasi-Peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

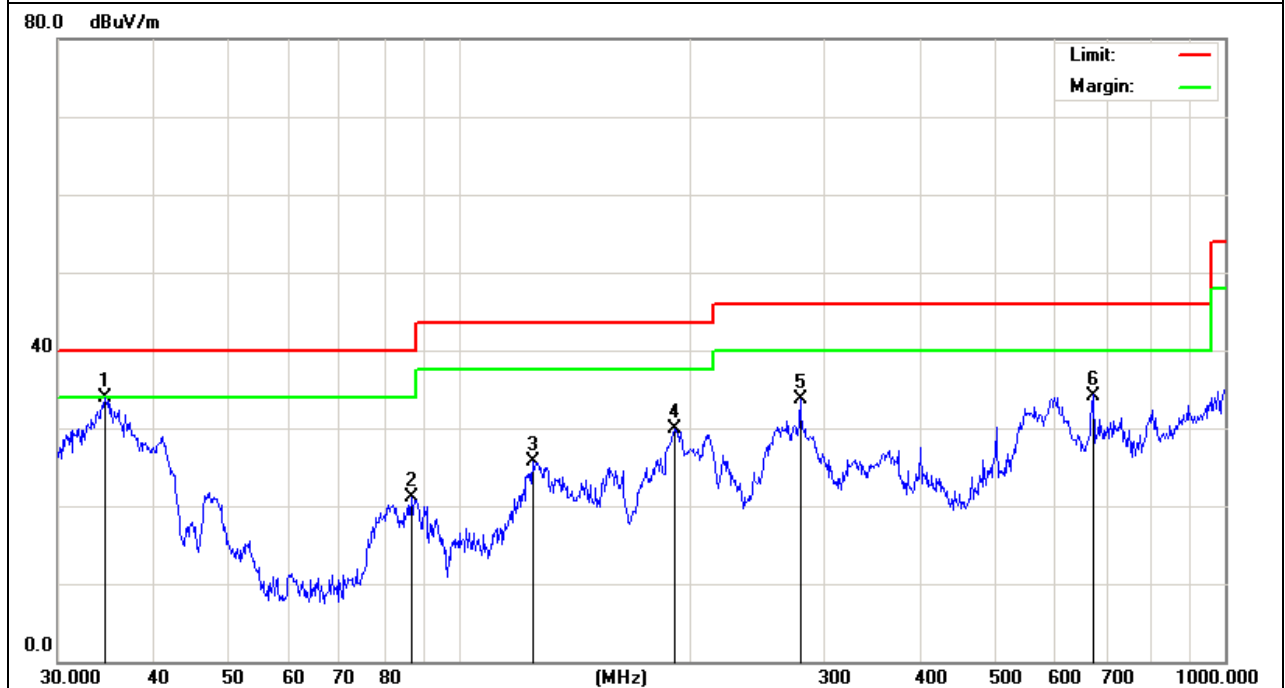


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	Normal charging	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
33.9174	31.89	-14.94	16.95	40.00	-23.05	Quasi-Peak
151.0663	35.55	-15.65	19.90	43.50	-23.60	Quasi-Peak
231.7178	43.01	-12.57	30.44	46.00	-15.56	Quasi-Peak
311.0867	41.19	-9.16	32.03	46.00	-13.97	Quasi-Peak
597.2232	33.71	-1.85	31.86	46.00	-14.14	Quasi-Peak
734.4913	35.46	-0.66	34.80	46.00	-11.20	Quasi-Peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

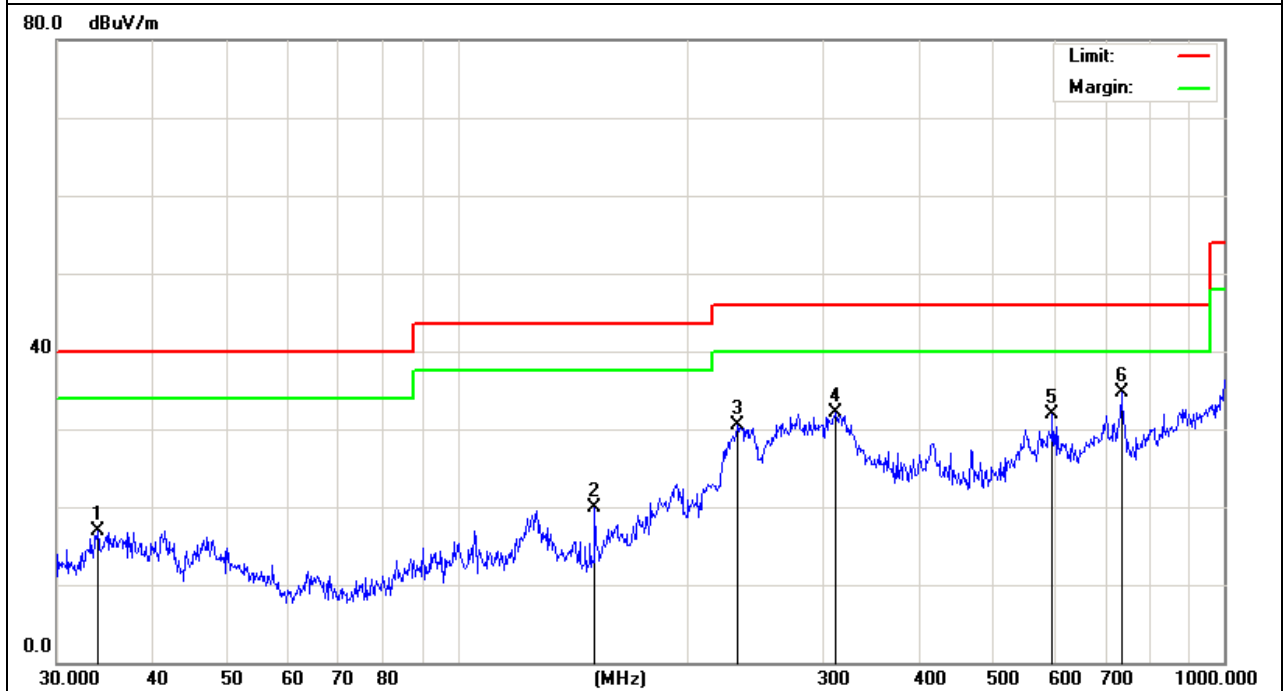

Note:

Measurement Level = Reading Level + Factor


Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX (1Mbps) CH00 (worst case)	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
103.4419	47.27	-15.69	31.58	43.50	-11.92	Quasi-Peak
239.1473	48.13	-11.73	36.40	46.00	-9.60	Quasi-Peak
262.8955	48.92	-11.02	37.90	46.00	-8.10	Quasi-Peak
396.2412	45.49	-7.06	38.43	46.00	-7.57	Quasi-Peak
504.7062	42.25	-5.35	36.90	46.00	-9.10	Quasi-Peak
597.2232	39.15	-1.85	37.30	46.00	-8.70	Quasi-Peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

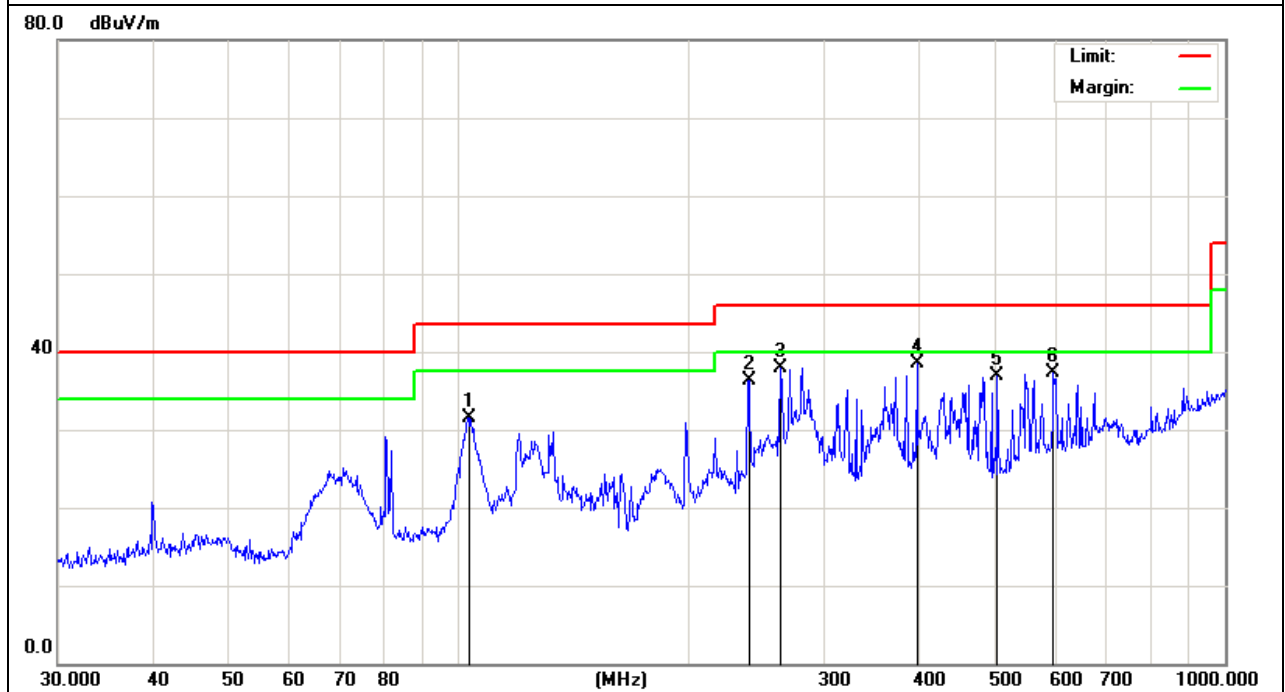


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX (1Mbps) CH00 (worst case)	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
80.0806	51.99	-19.09	32.90	40.00	-7.10	Quasi-Peak
133.1511	48.19	-14.79	33.40	43.50	-10.10	Quasi-Peak
265.6757	45.47	-11.17	34.30	46.00	-11.70	Quasi-Peak
410.3824	45.42	-6.62	38.80	46.00	-7.20	Quasi-Peak
480.5276	44.60	-5.90	38.70	46.00	-7.30	Quasi-Peak
605.6592	39.54	-1.44	38.10	46.00	-7.90	Quasi-Peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

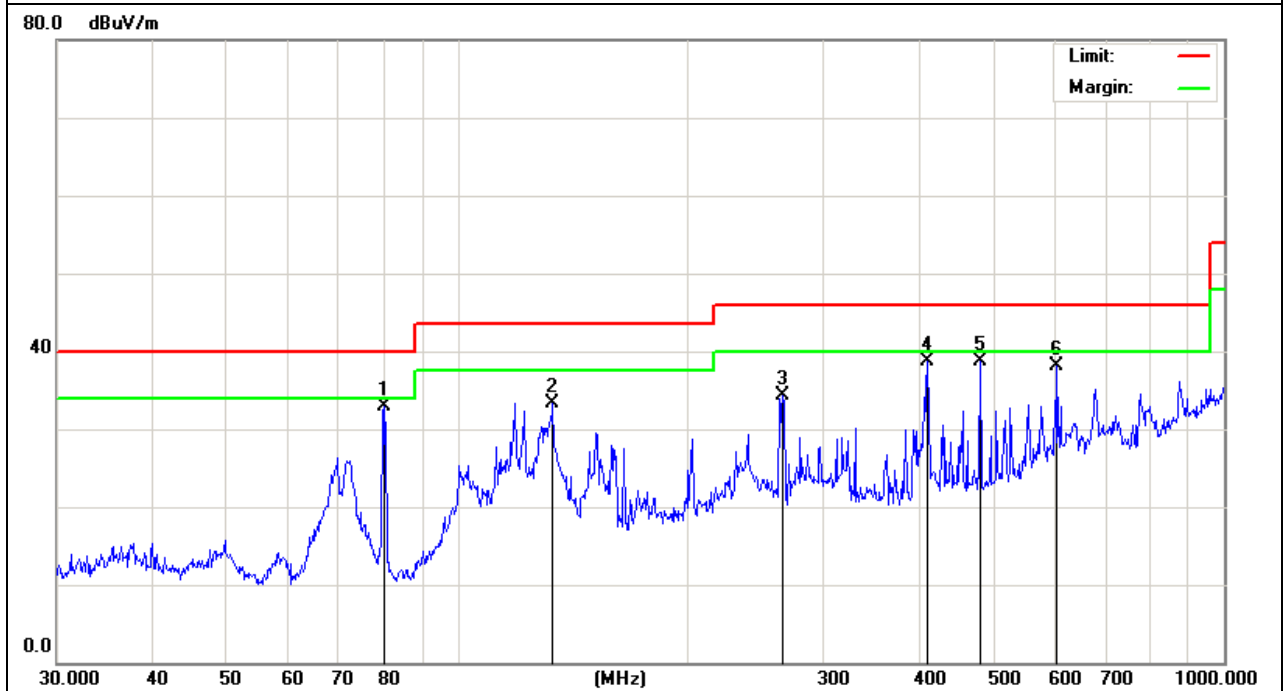

Note:

Measurement Level = Reading Level + Factor


Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier

EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	RX	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
33.9174	30.91	-14.94	15.97	40.00	-24.03	Quasi-Peak
136.9389	33.49	-14.79	18.70	43.50	-24.80	Quasi-Peak
231.7178	42.03	-12.57	29.46	46.00	-16.54	Quasi-Peak
300.3672	41.05	-9.59	31.46	46.00	-14.54	Quasi-Peak
459.1143	36.54	-6.94	29.60	46.00	-16.40	Quasi-Peak
801.7862	37.47	0.66	38.13	46.00	-7.87	Quasi-Peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

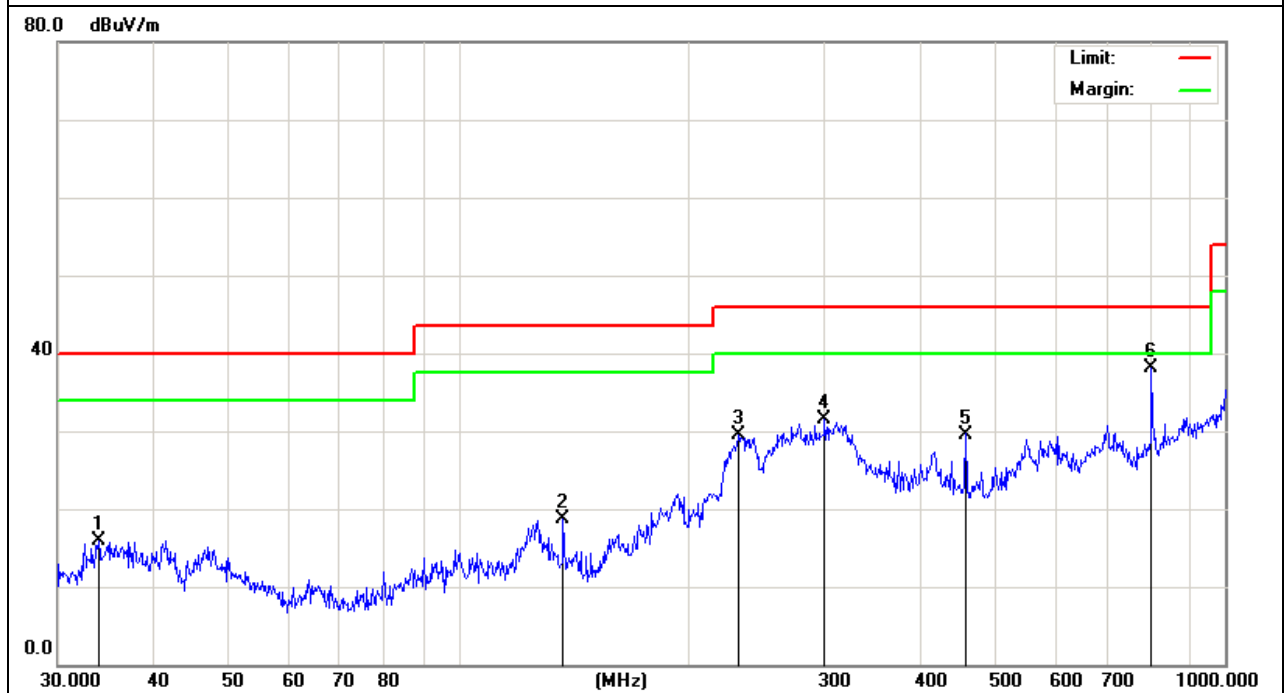


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	RX	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
37.2854	31.08	-14.59	16.49	40.00	-23.51	Quasi-Peak
115.3204	35.19	-15.13	20.06	43.50	-23.44	Quasi-Peak
183.2005	30.25	-10.48	19.77	43.50	-23.73	Quasi-Peak
254.7281	31.32	-10.97	20.35	46.00	-25.65	Quasi-Peak
463.9696	33.60	-6.60	27.00	46.00	-19.00	Quasi-Peak
704.2259	30.77	0.08	30.85	46.00	-15.15	Quasi-Peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

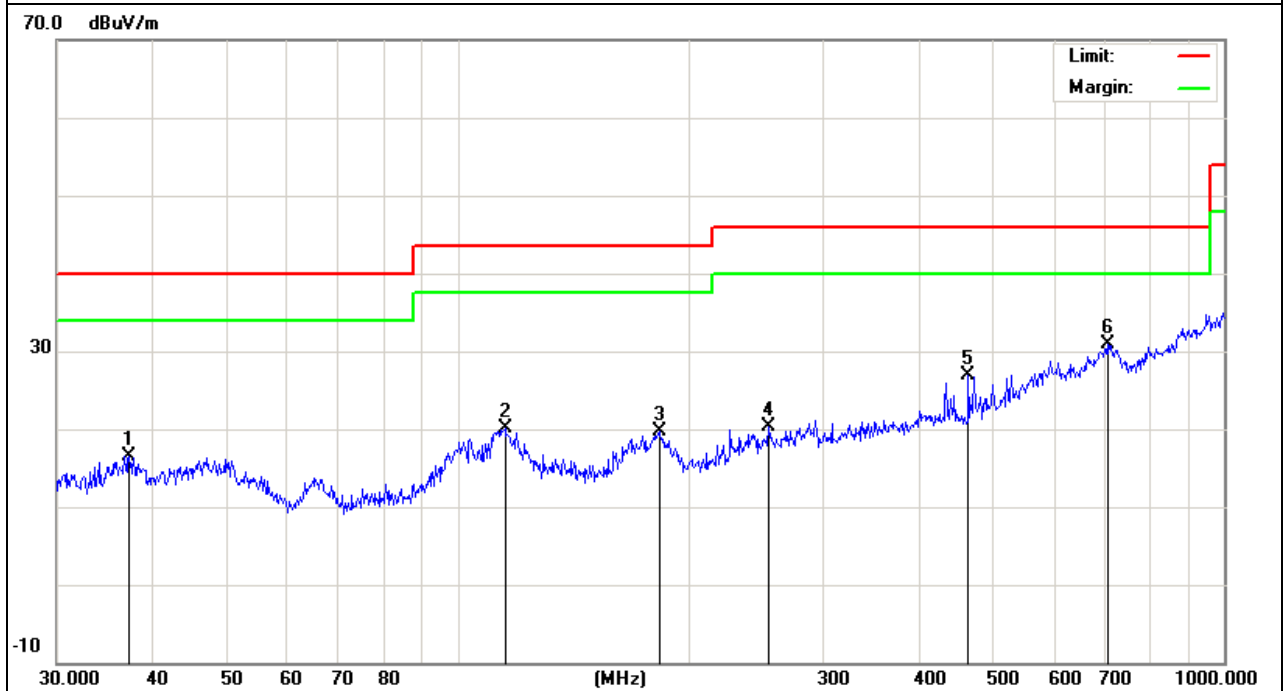

Note:

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss–Pre-amplifier


Radiated Emissions Test Data Above 1GHz

EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2402MHz (1Mbps-worst case)	Polarization :	Horizontal
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2476.000	43.80	-2.39	41.41	74.00	-32.59	peak
2818.000	44.84	-1.69	43.15	74.00	-30.85	peak
4123.000	42.13	2.02	44.15	74.00	-29.85	peak
4807.000	43.43	4.35	47.78	74.00	-26.22	peak
6112.000	41.57	6.26	47.83	74.00	-26.17	peak
7210.000	40.70	8.11	48.81	74.00	-25.19	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

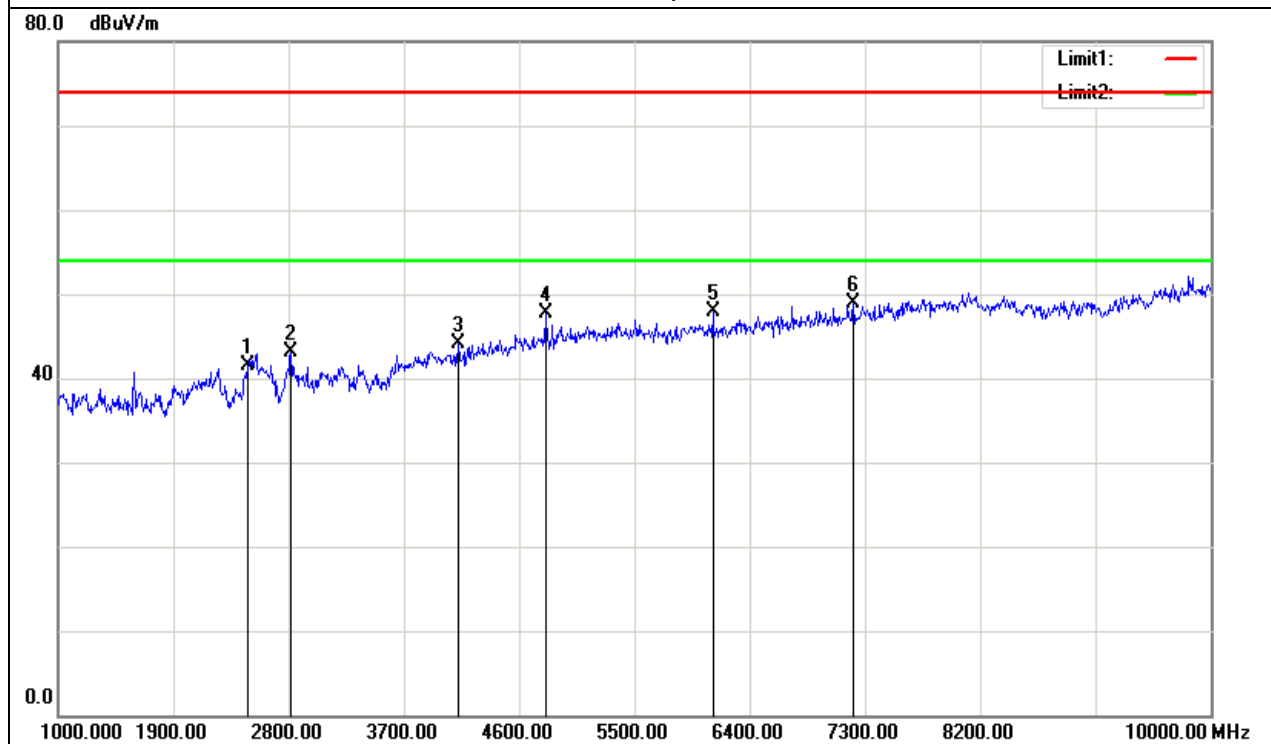


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2402MHz (1Mbps-worst case)	Polarization :	Vertical
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1801.000	47.65	-6.26	41.39	74.00	-32.61	peak
2539.000	44.29	-2.19	42.10	74.00	-31.90	peak
3997.000	41.70	1.58	43.28	74.00	-30.72	peak
4807.000	43.51	4.35	47.86	74.00	-26.14	peak
5608.000	41.41	5.92	47.33	74.00	-26.67	peak
6922.000	41.07	7.57	48.64	74.00	-25.36	peak


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

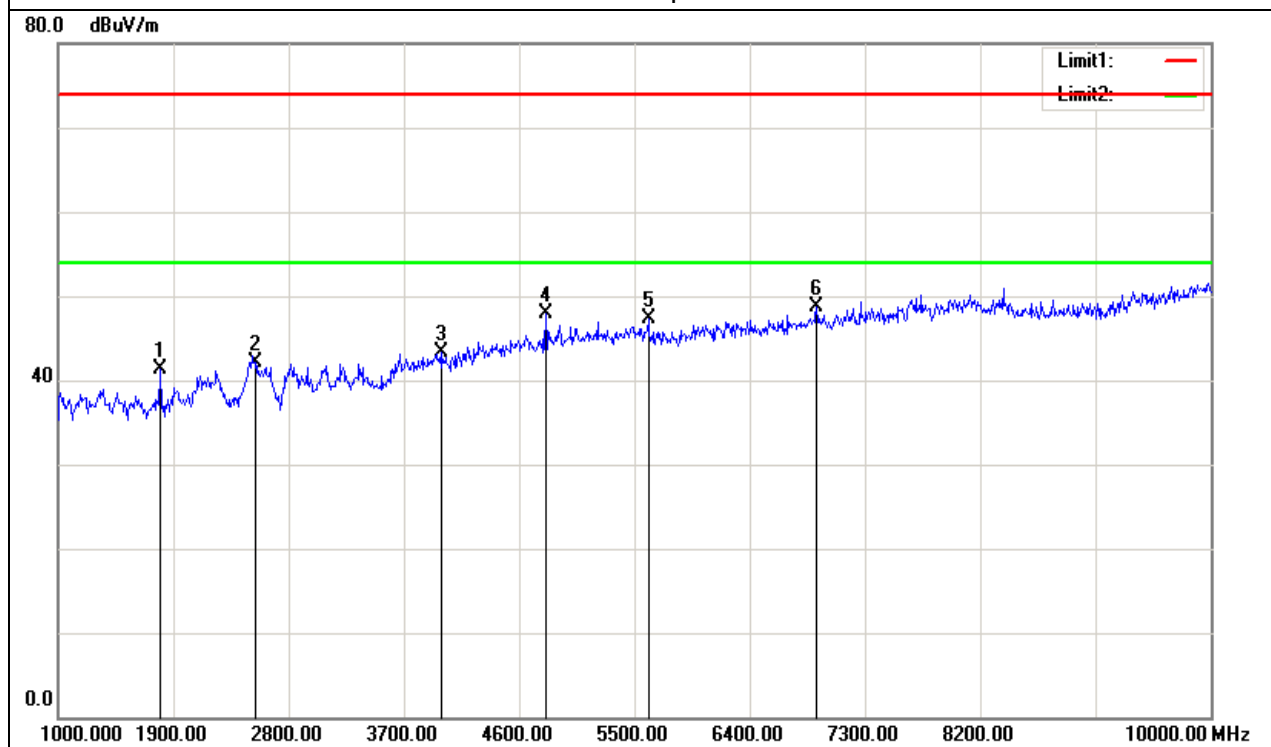


Horizontal

Detect: 10GHz -26.5GHz

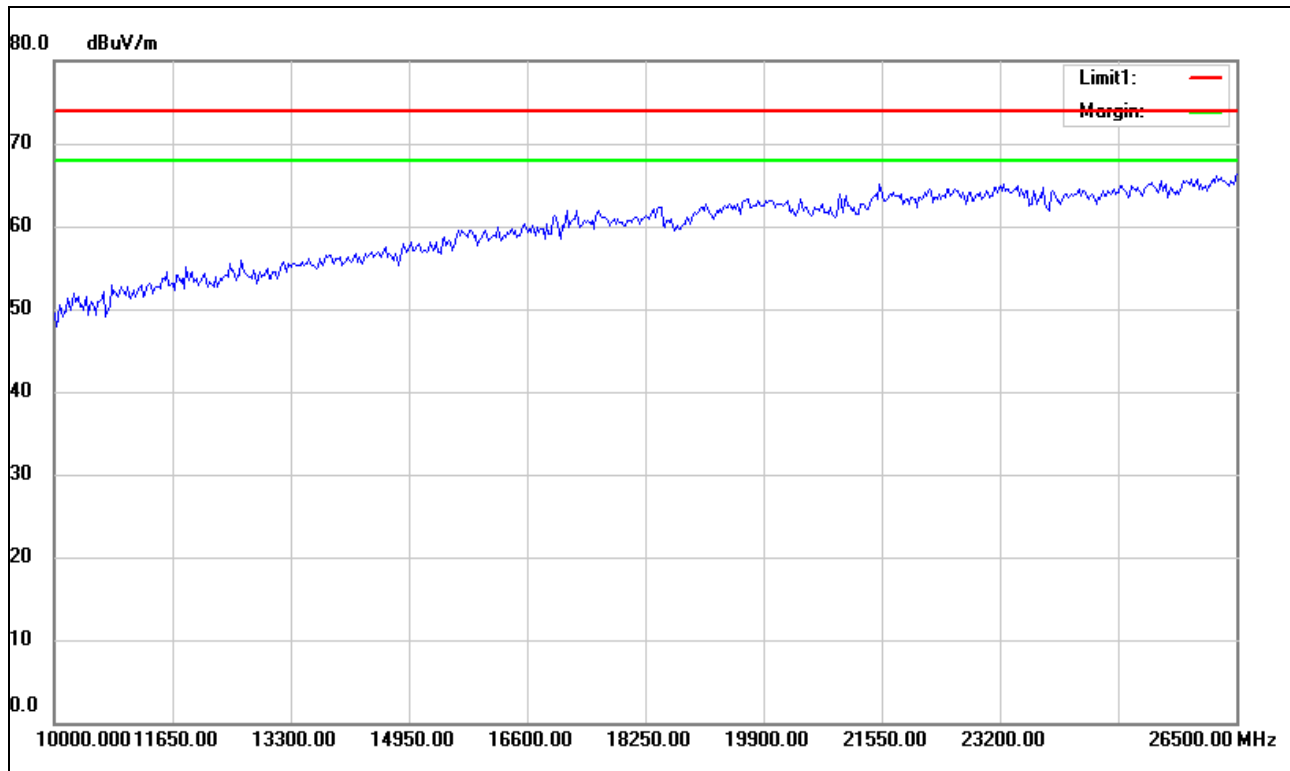

Vertical

Detect: 10GHz -26.5GHz

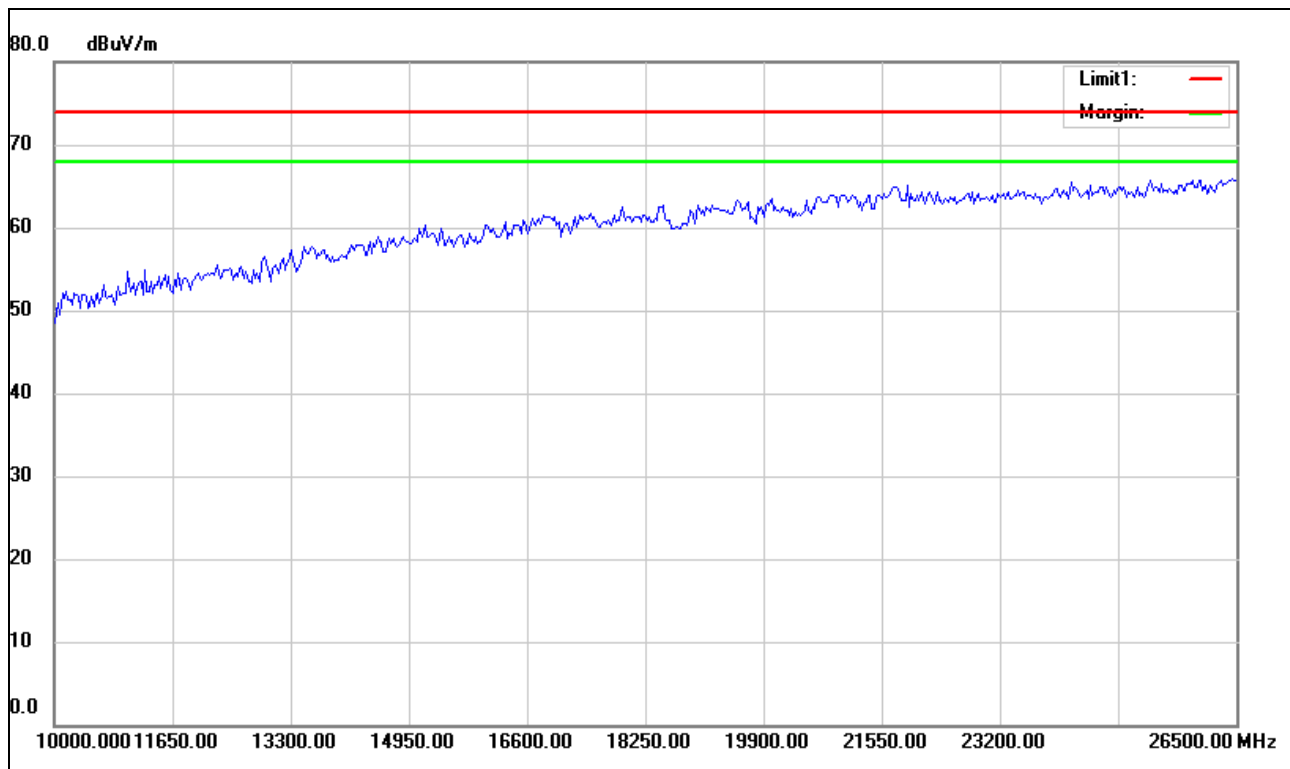


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2441MHz (1Mbps-worst case)	Polarization :	Horizontal
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1603.000	49.98	-6.69	43.29	74.00	-30.71	peak
3205.000	42.62	-1.02	41.60	74.00	-32.40	peak
3988.000	41.98	1.54	43.52	74.00	-30.48	peak
4879.000	45.88	4.59	50.47	74.00	-23.53	peak
5680.000	40.67	5.95	46.62	74.00	-27.38	peak
6814.000	40.84	7.40	48.24	74.00	-25.76	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

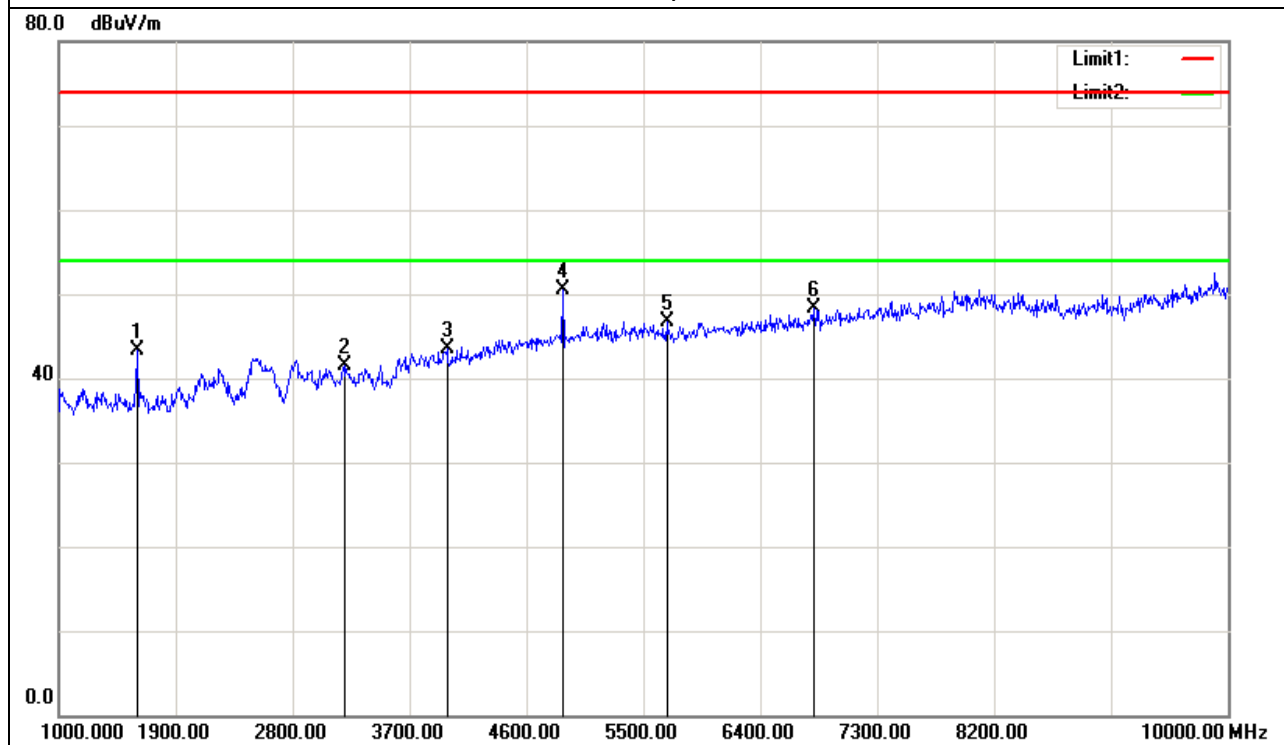


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2441MHz (1Mbps-worst case)	Polarization :	Vertical
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1396.000	52.52	-7.07	45.45	74.00	-28.55	peak
2539.000	45.23	-2.19	43.04	74.00	-30.96	peak
3745.000	43.26	0.51	43.77	74.00	-30.23	peak
4879.000	44.78	4.59	49.37	74.00	-24.63	peak
6085.000	41.06	6.22	47.28	74.00	-26.72	peak
7327.000	41.66	8.34	50.00	74.00	-24.00	peak


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

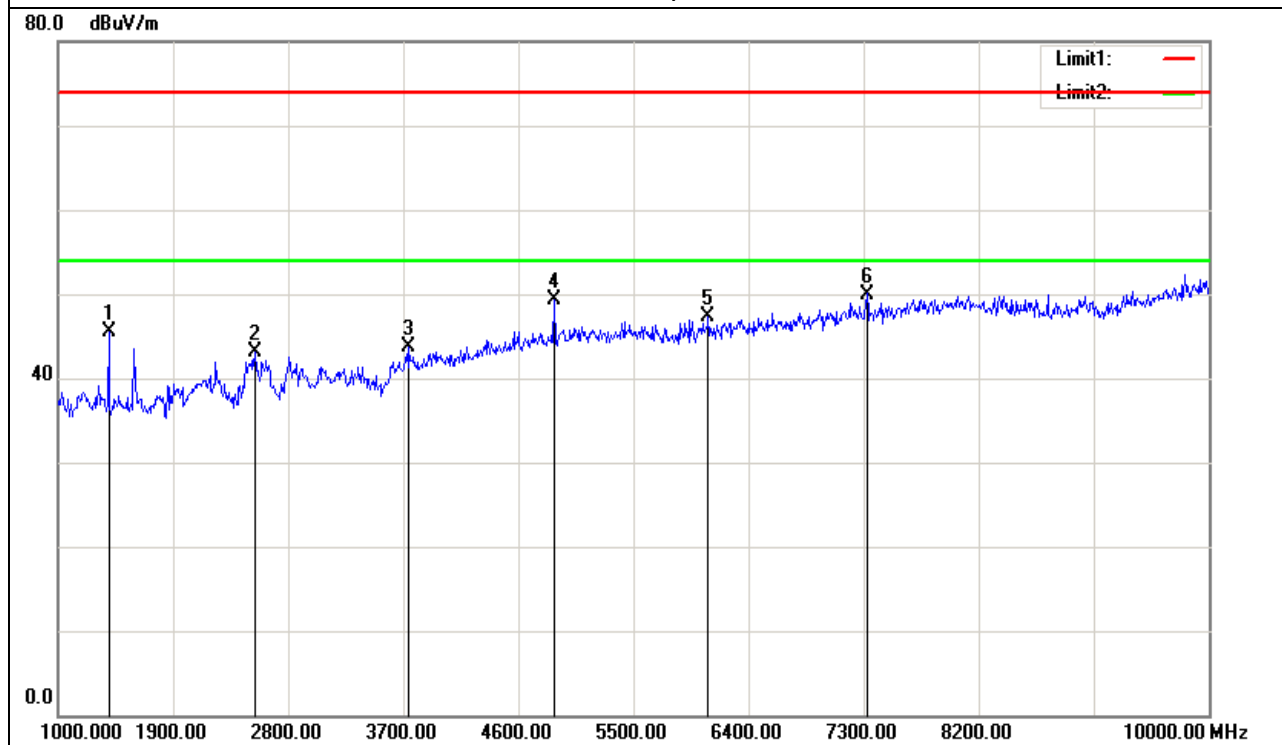


Horizontal

Detect: 10GHz -26.5GHz

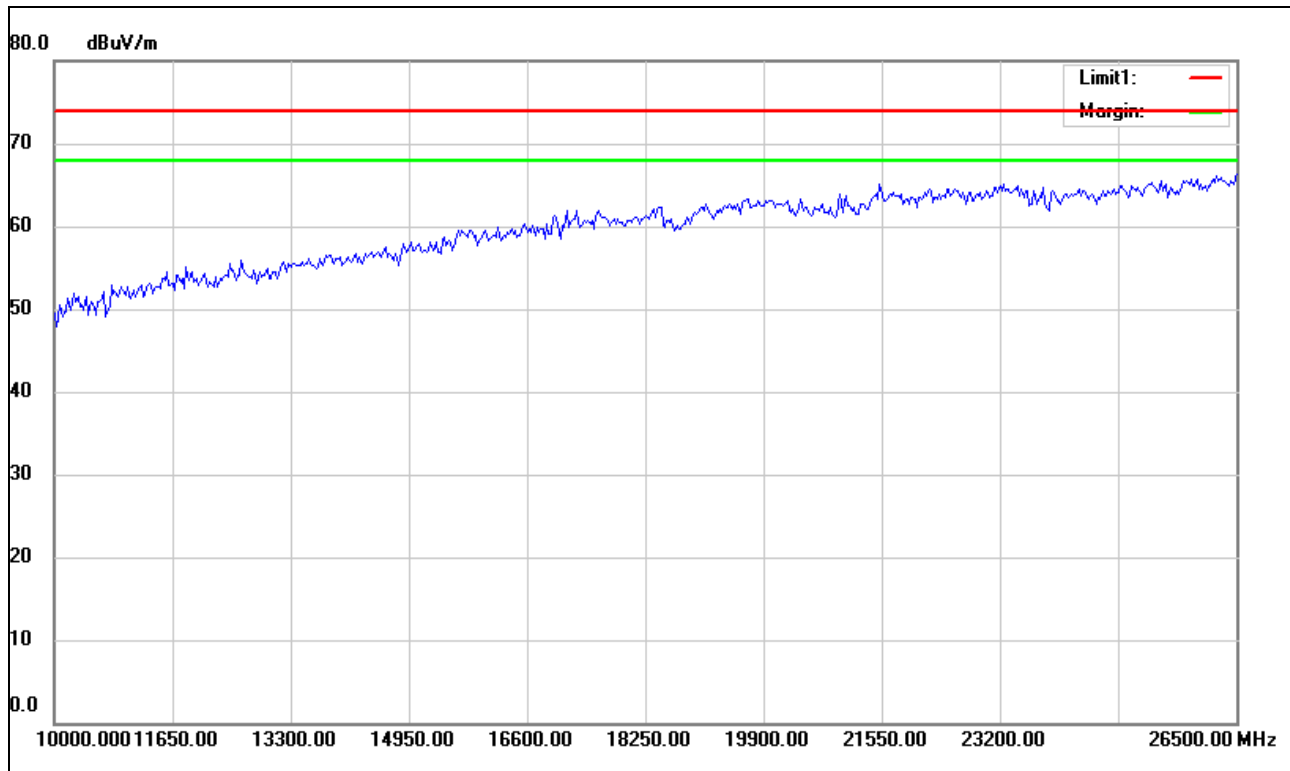

Vertical

Detect: 10GHz -26.5GHz

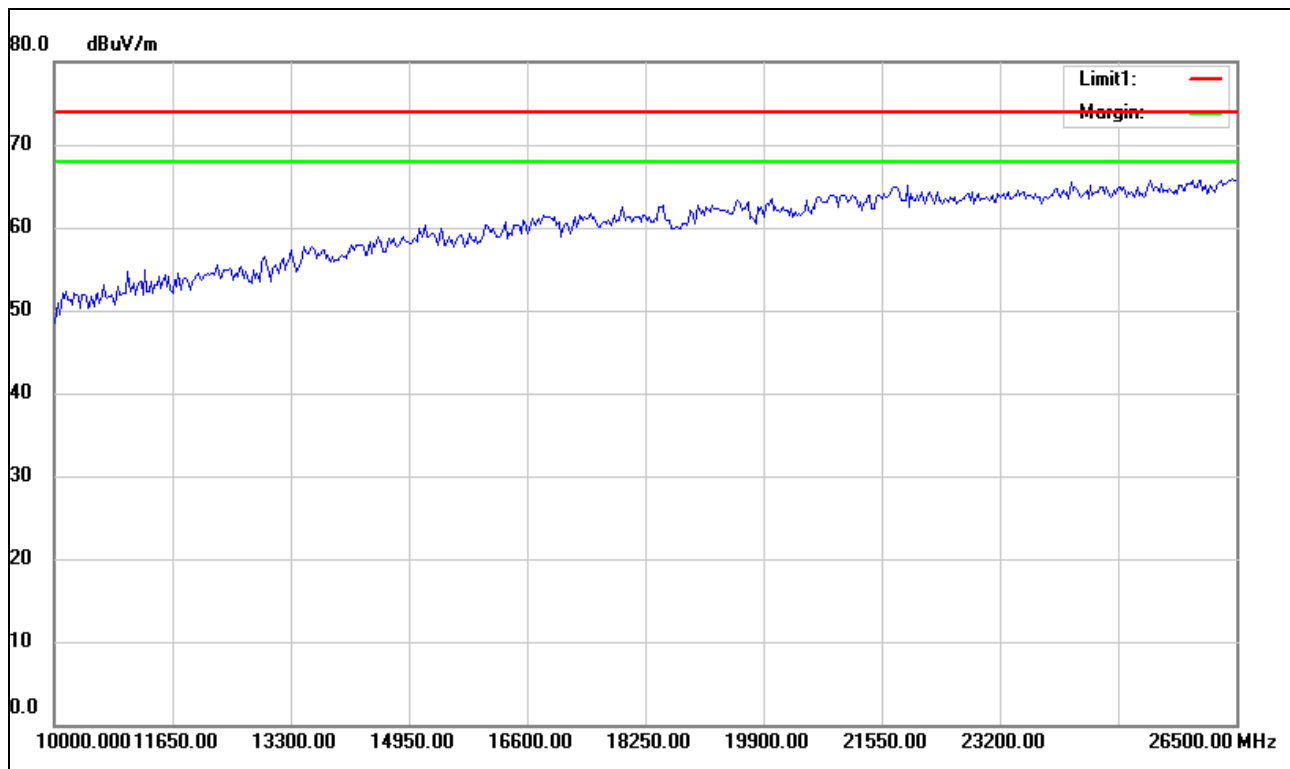


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2480MHz (1Mbps-worst case)	Polarization :	Horizontal
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1198.000	46.37	-7.80	38.57	74.00	-35.43	peak
2530.000	45.70	-2.21	43.49	74.00	-30.51	peak
3223.000	42.42	-0.99	41.43	74.00	-32.57	peak
3817.000	43.12	0.82	43.94	74.00	-30.06	peak
4960.000	46.25	4.85	51.10	74.00	-22.90	peak
5554.000	40.41	5.89	46.30	74.00	-27.70	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

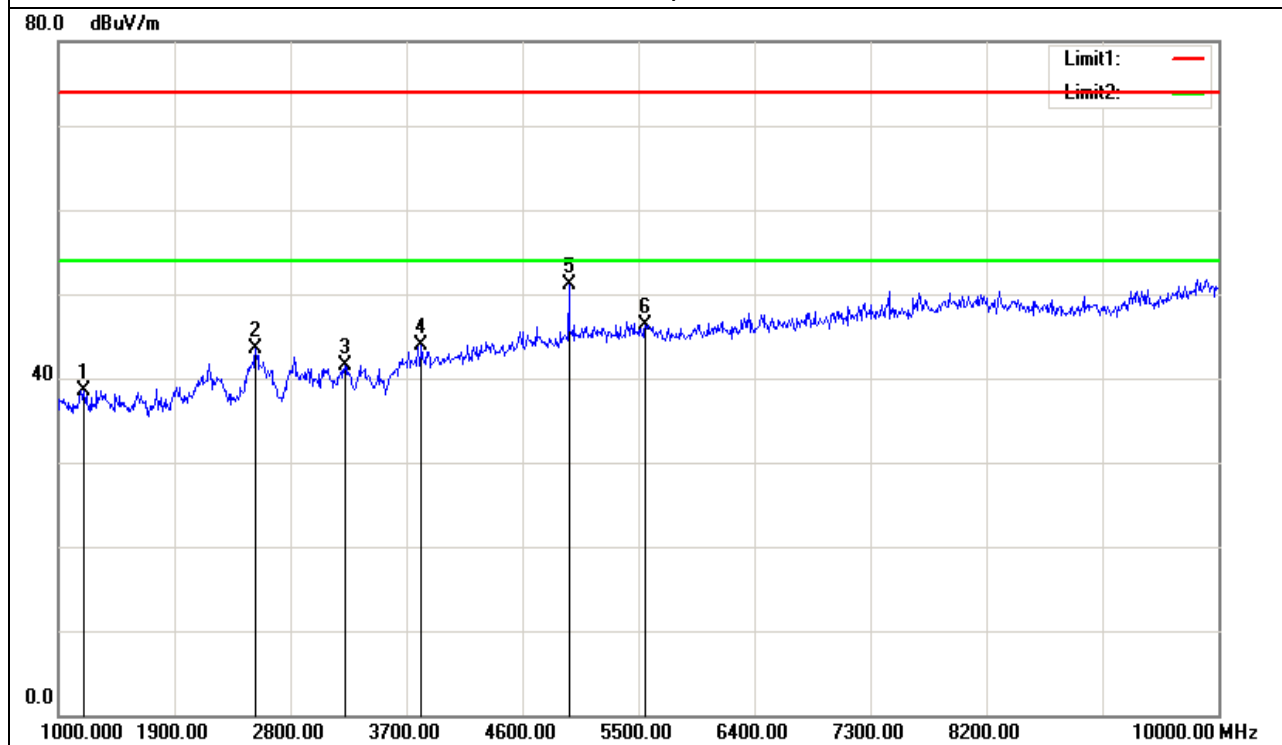


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2480MHz (1Mbps-worst case)	Polarization :	Vertical
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1594.000	49.54	-6.71	42.83	74.00	-31.17	peak
2485.000	44.99	-2.34	42.65	74.00	-31.35	peak
3898.000	42.12	1.16	43.28	74.00	-30.72	peak
4960.000	47.05	4.85	51.90	74.00	-22.10	peak
6841.000	41.04	7.44	48.48	74.00	-25.52	peak
7444.000	43.99	8.57	52.56	74.00	-21.44	peak


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

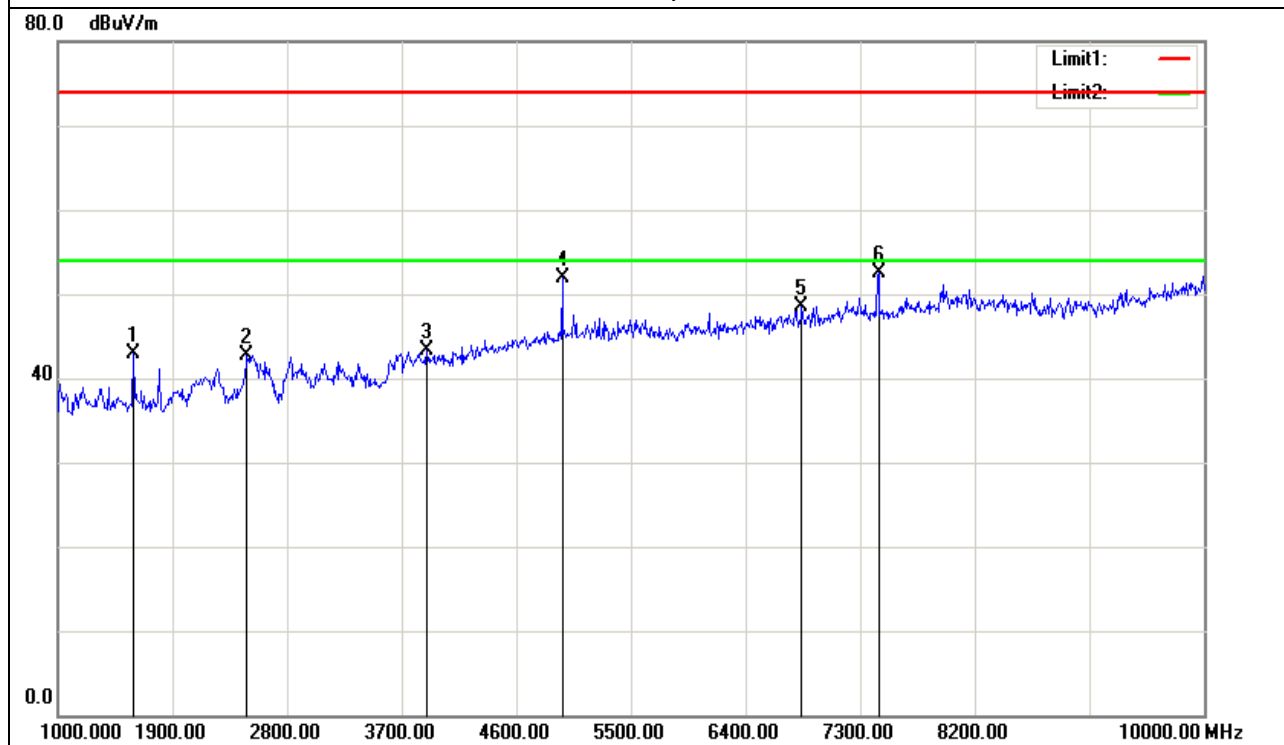


Horizontal

Detect: 10GHz -26.5GHz

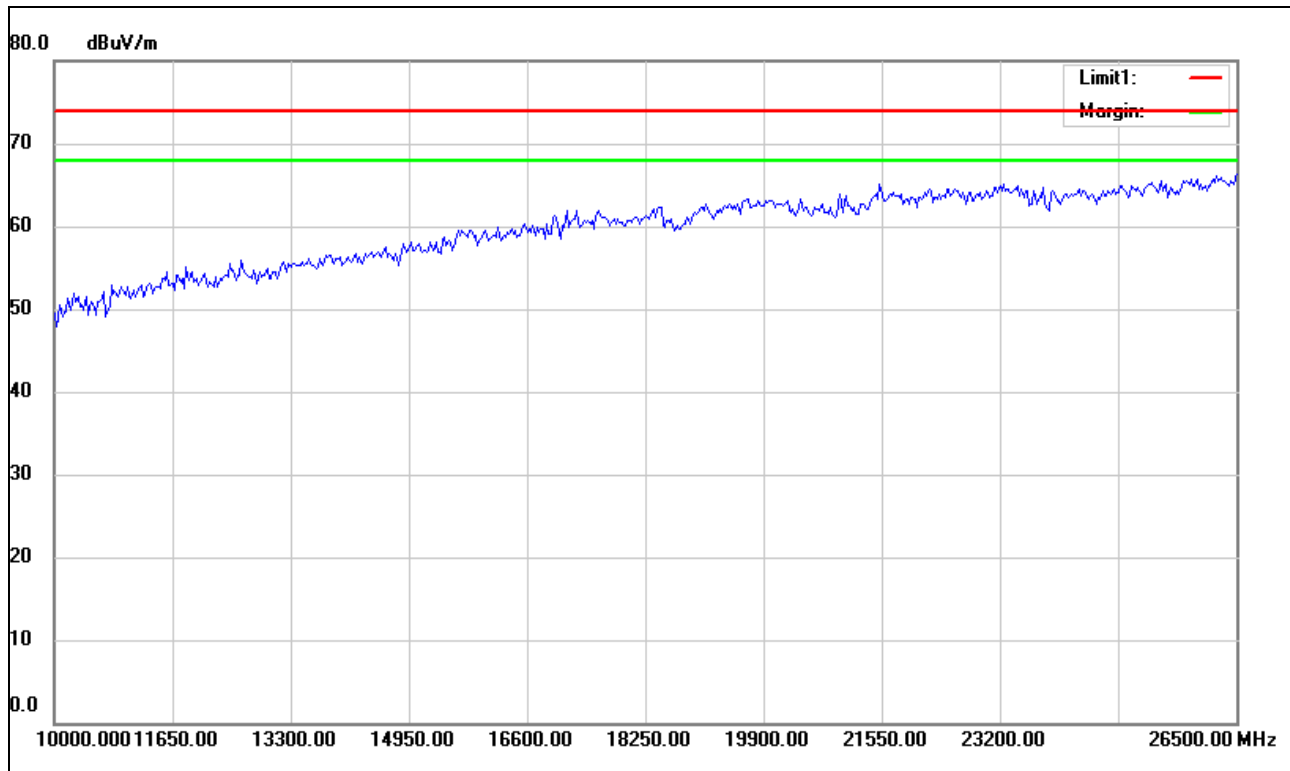

Vertical

Detect: 10GHz -26.5GHz

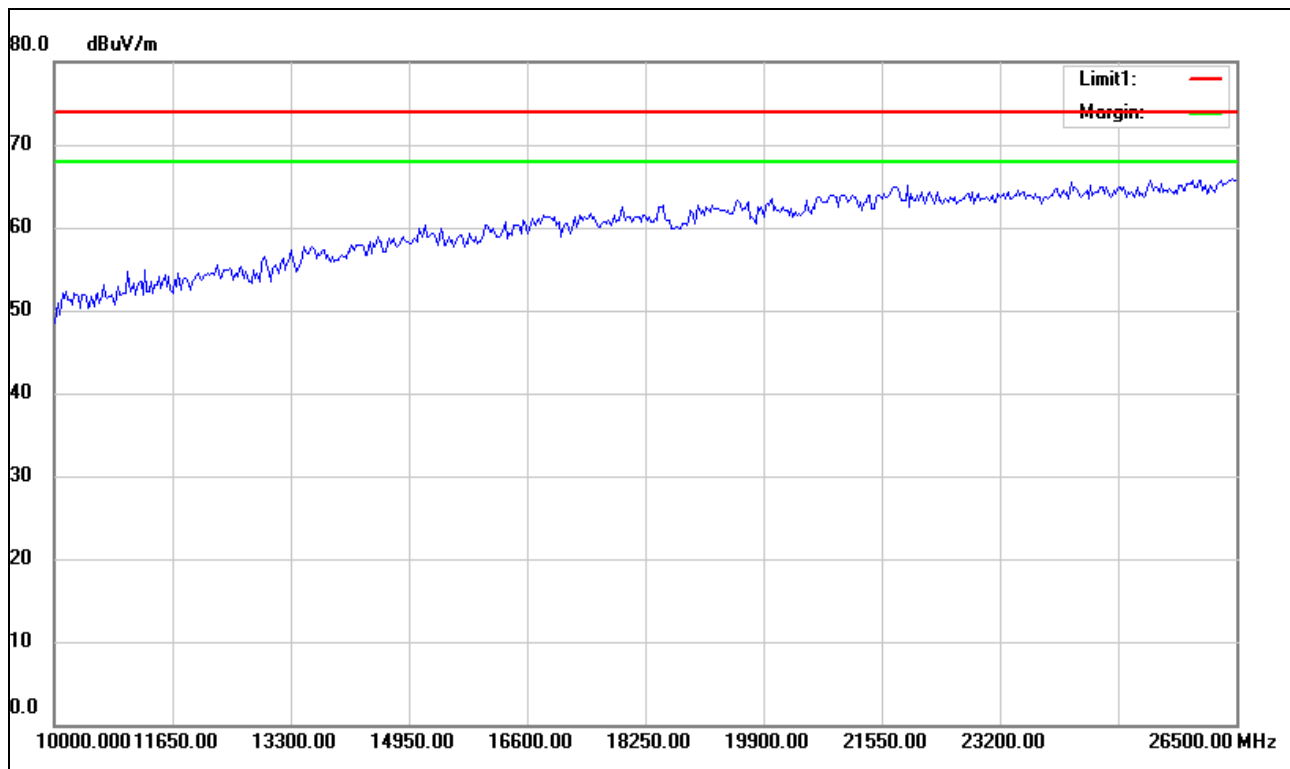


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2402MHz (3Mbps-worst case)	Polarization :	Horizontal
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1594.000	48.21	-6.71	41.50	74.00	-32.50	peak
2548.000	45.42	-2.17	43.25	74.00	-30.75	peak
4033.000	42.40	1.71	44.11	74.00	-29.89	peak
4996.000	41.95	4.97	46.92	74.00	-27.08	peak
6634.000	40.79	7.11	47.90	74.00	-26.10	peak
7687.000	40.91	9.04	49.95	74.00	-24.05	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

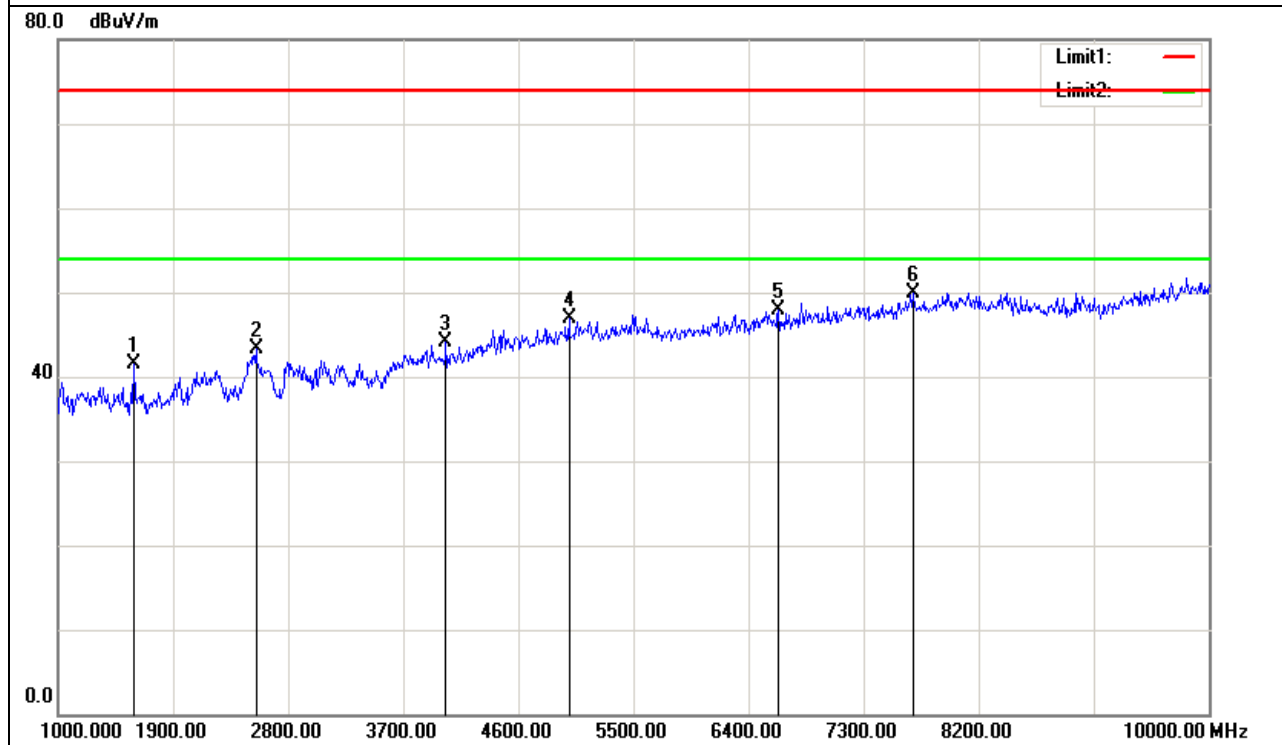


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2402MHz (3Mbps-worst case)	Polarization :	Vertical
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1594.000	52.12	-6.71	45.41	74.00	-28.59	peak
2512.000	46.36	-2.24	44.12	74.00	-29.88	peak
3925.000	42.31	1.27	43.58	74.00	-30.42	peak
4807.000	42.64	4.35	46.99	74.00	-27.01	peak
6022.000	40.84	6.12	46.96	74.00	-27.04	peak
6850.000	41.14	7.46	48.60	74.00	-25.40	peak


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

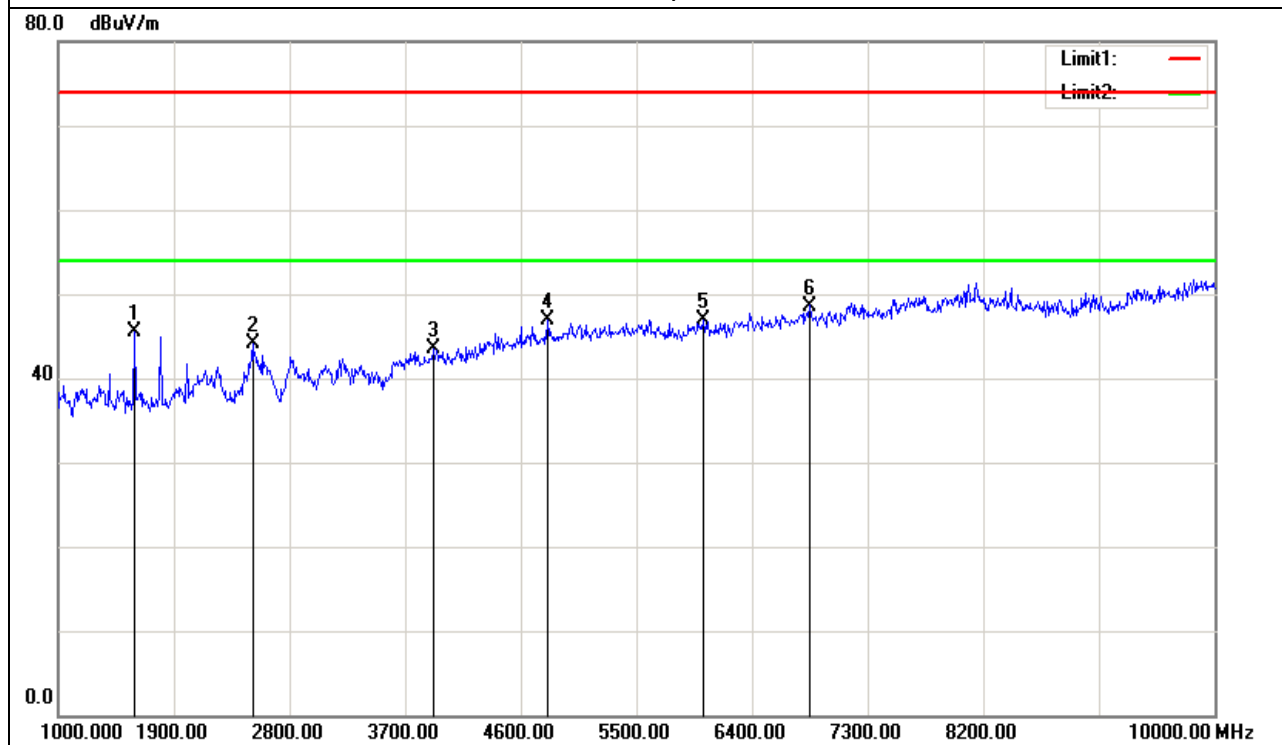


Horizontal

Detect: 10GHz -26.5GHz

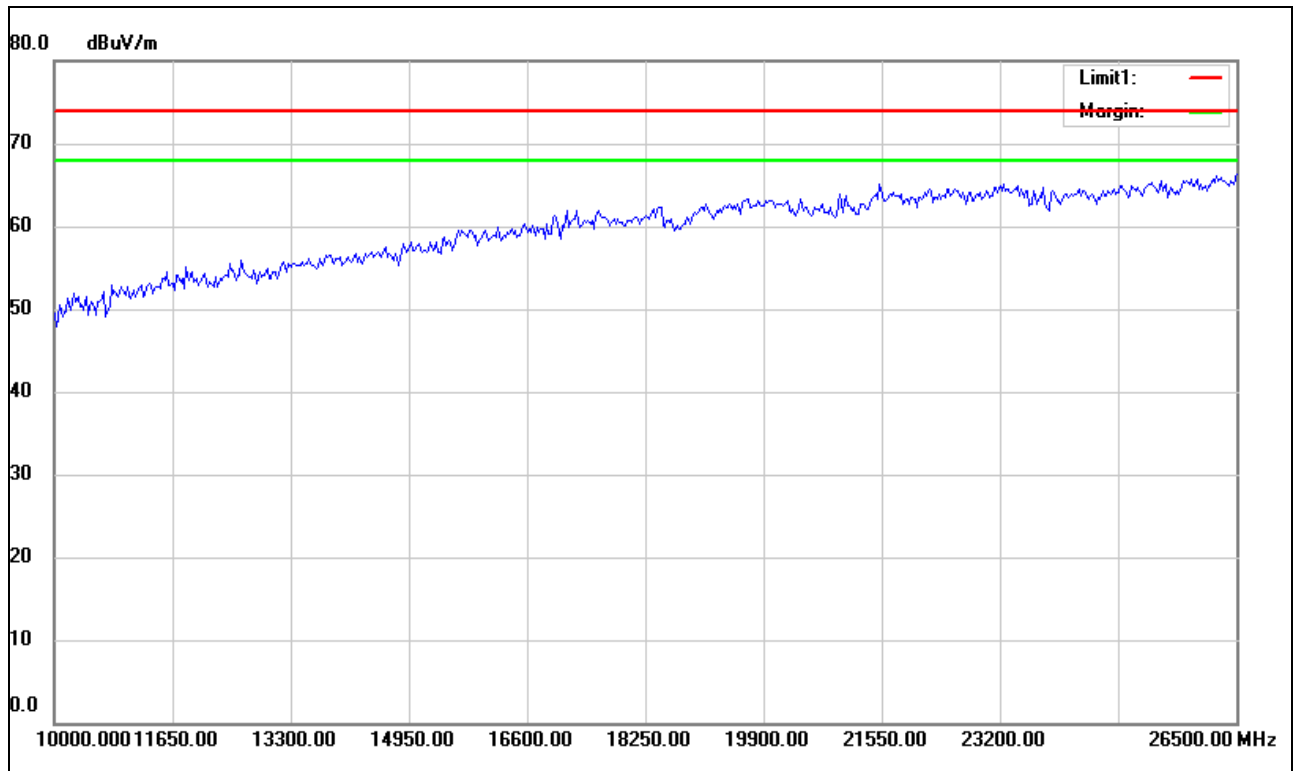

Vertical

Detect: 10GHz -26.5GHz

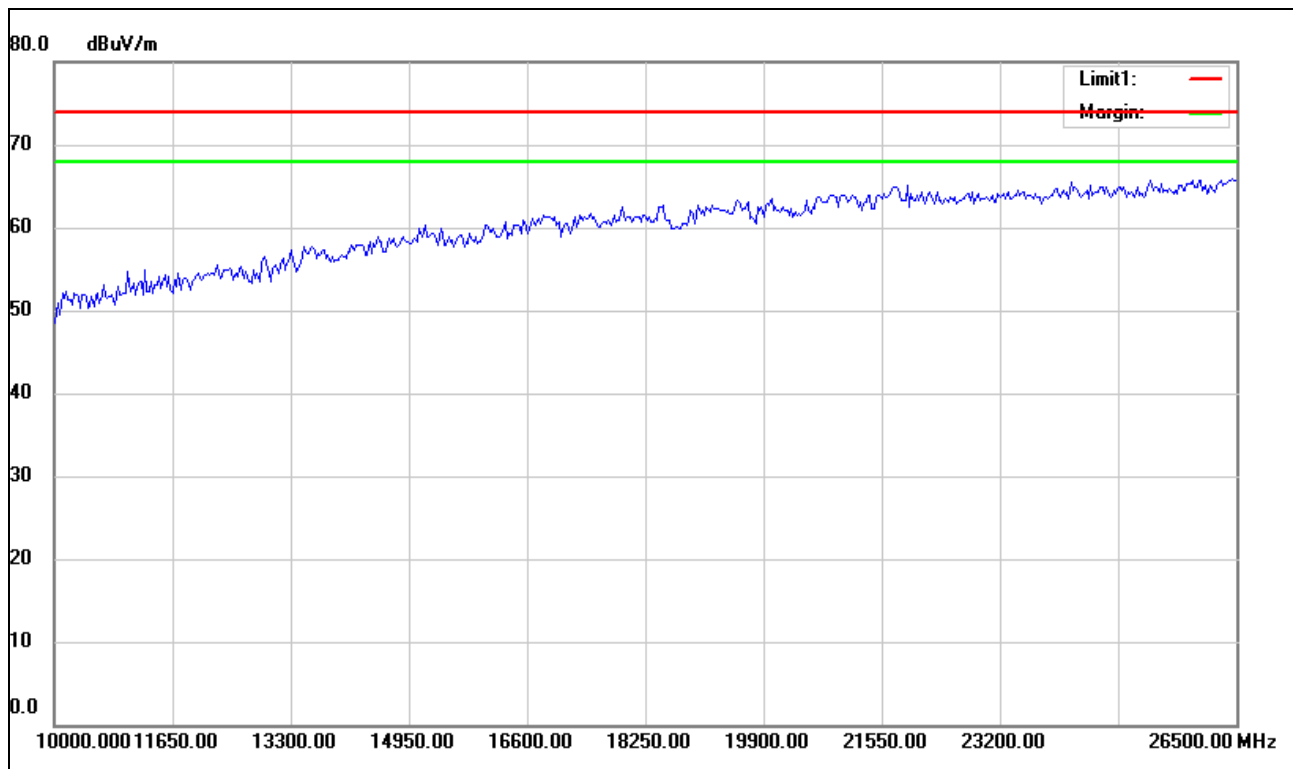


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2441MHz (3Mbps-worst case)	Polarization :	Horizontal
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1711.000	51.26	-6.46	44.80	74.00	-29.20	peak
2512.000	44.60	-2.24	42.36	74.00	-31.64	peak
3682.000	42.63	0.25	42.88	74.00	-31.12	peak
4402.000	41.76	3.01	44.77	74.00	-29.23	peak
4879.000	42.94	4.59	47.53	74.00	-26.47	peak
5329.000	42.07	5.57	47.64	74.00	-26.36	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

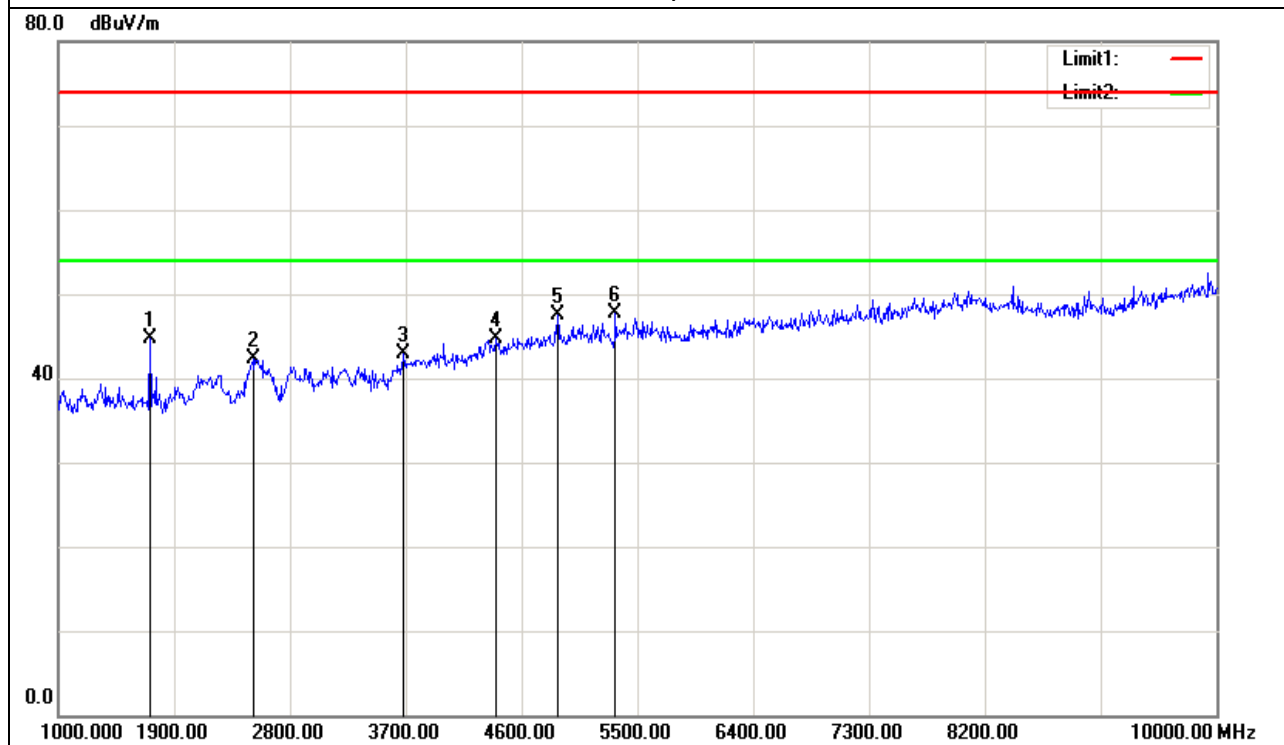


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2441MHz (3Mbps-worst case)	Polarization :	Vertical
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1738.000	52.88	-6.40	46.48	74.00	-27.52	peak
2530.000	44.94	-2.21	42.73	74.00	-31.27	peak
3691.000	42.30	0.29	42.59	74.00	-31.41	peak
4879.000	43.26	4.59	47.85	74.00	-26.15	peak
5410.000	40.72	5.71	46.43	74.00	-27.57	peak
6526.000	40.99	6.93	47.92	74.00	-26.08	peak


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

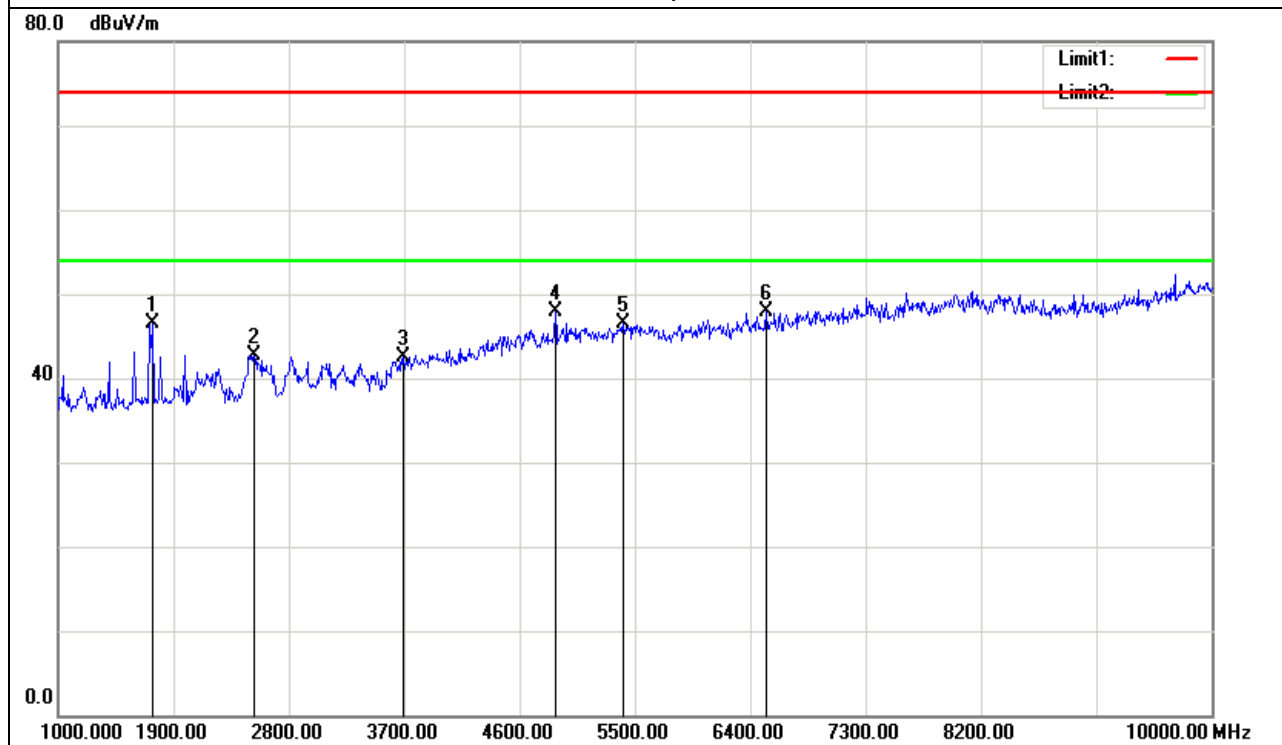


Horizontal

Detect: 10GHz -26.5GHz

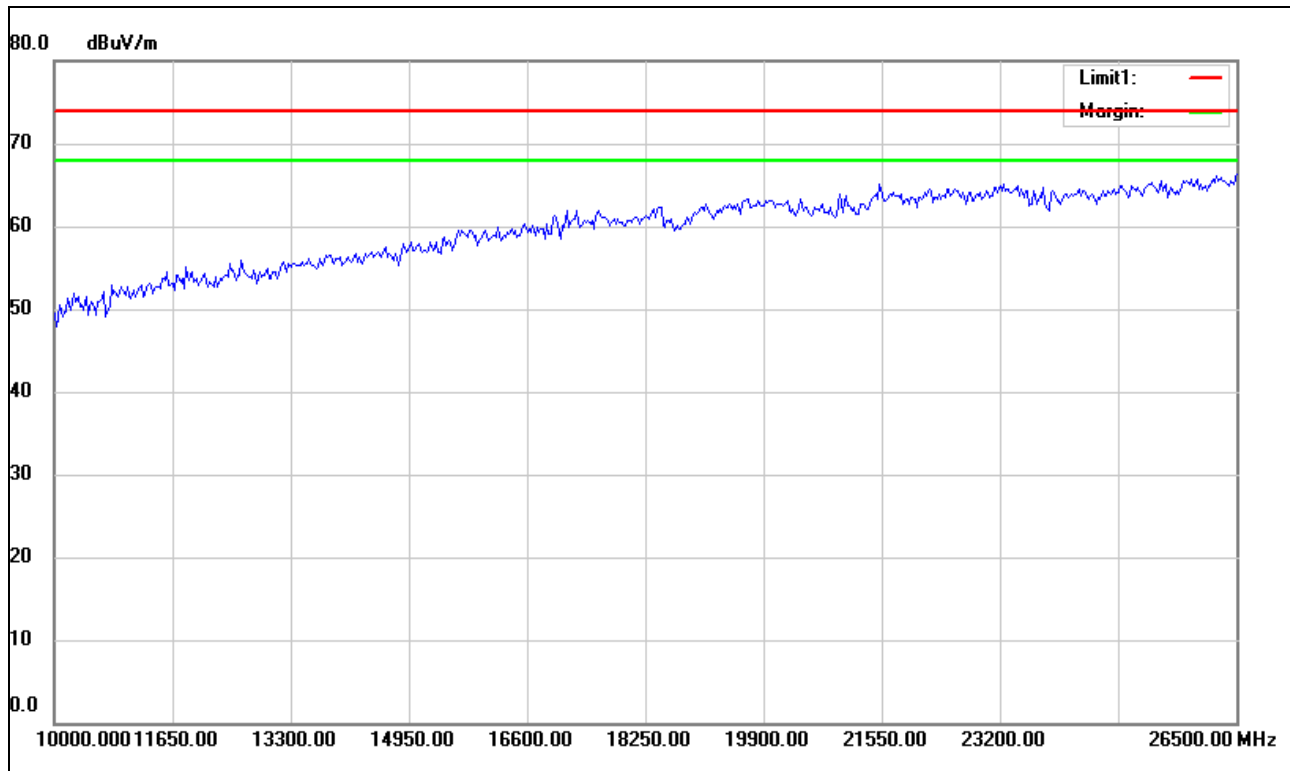

Vertical

Detect: 10GHz -26.5GHz

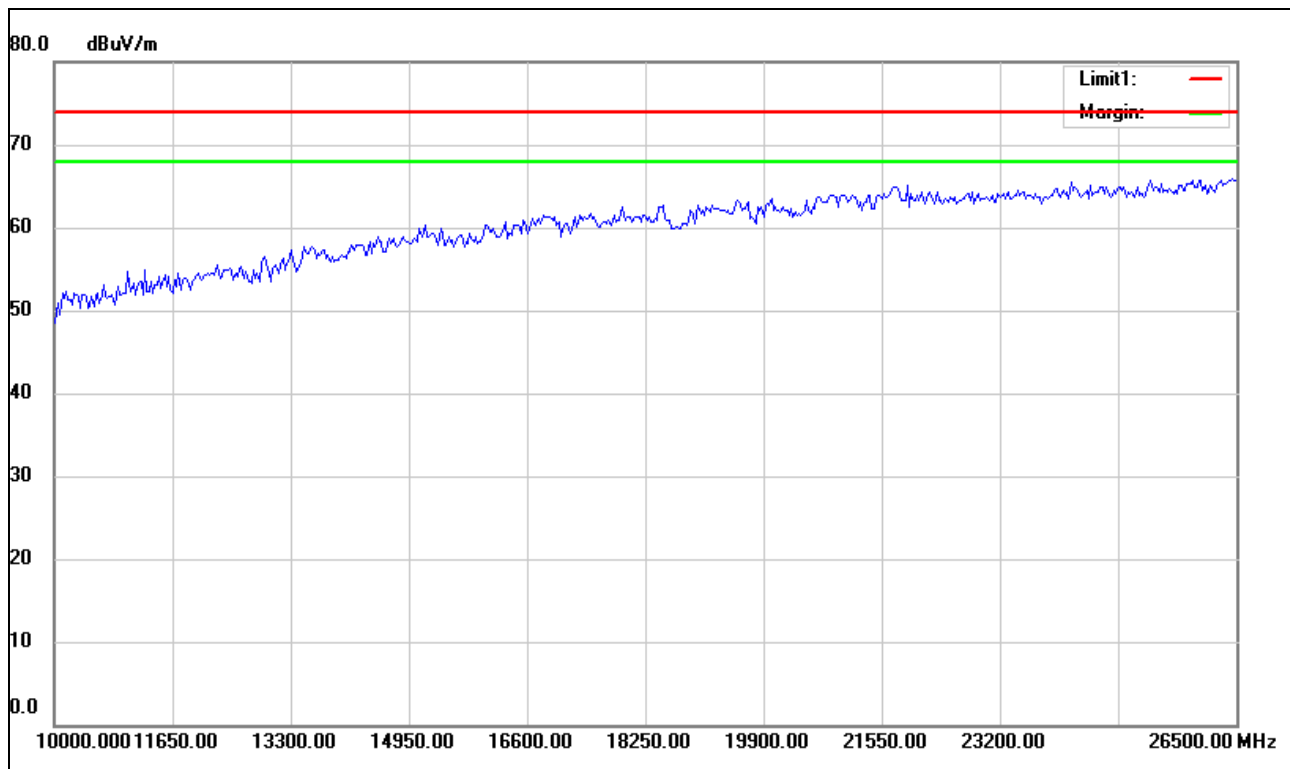


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2480MHz (3Mbps-worst case)	Polarization :	Horizontal
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2179.000	44.68	-4.02	40.66	74.00	-33.34	peak
2818.000	44.48	-1.69	42.79	74.00	-31.21	peak
3718.000	42.41	0.40	42.81	74.00	-31.19	peak
4519.000	41.62	3.41	45.03	74.00	-28.97	peak
4960.000	43.92	4.85	48.77	74.00	-25.23	peak
5491.000	40.91	5.85	46.76	74.00	-27.24	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

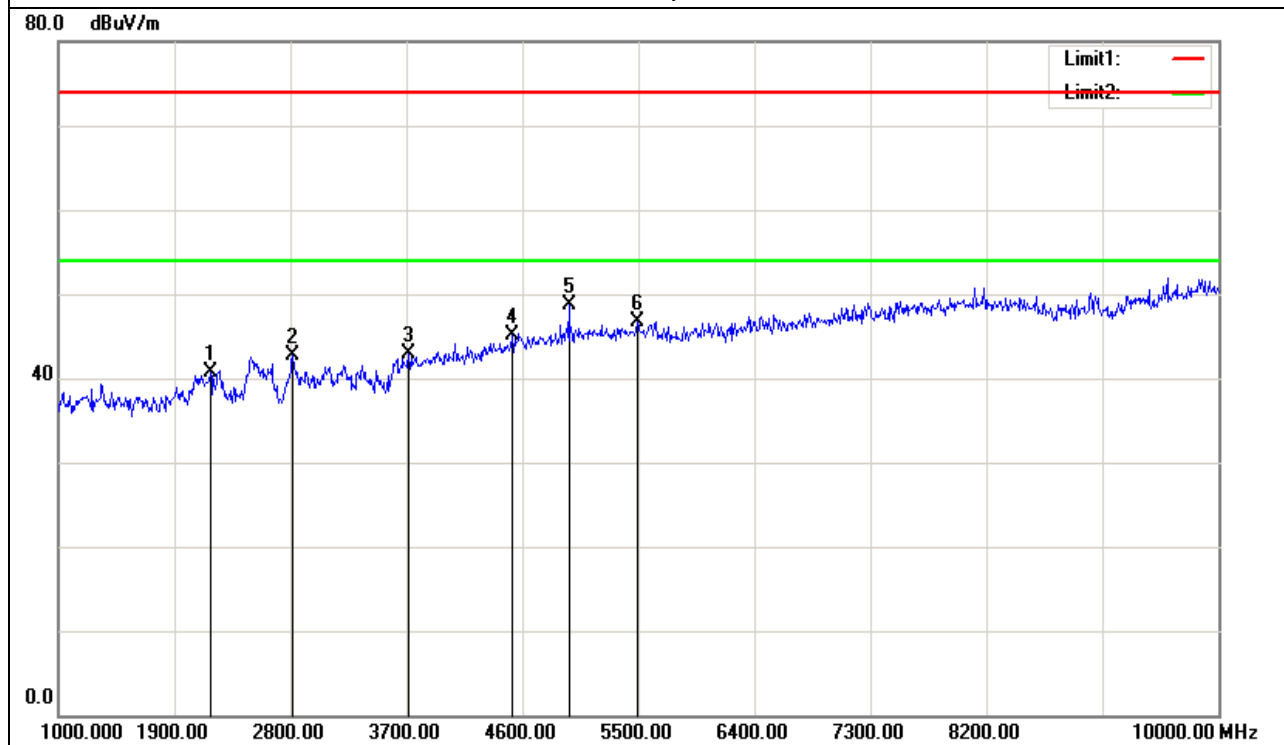


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	TX 2480MHz (3Mbps-worst case)	Polarization :	Vertical
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1801.000	55.25	-6.26	48.99	74.00	-25.01	peak
2152.000	45.68	-4.17	41.51	74.00	-32.49	peak
2827.000	43.88	-1.67	42.21	74.00	-31.79	peak
3943.000	42.25	1.35	43.60	74.00	-30.40	peak
4960.000	44.10	4.85	48.95	74.00	-25.05	peak
5545.000	40.61	5.89	46.50	74.00	-27.50	peak


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

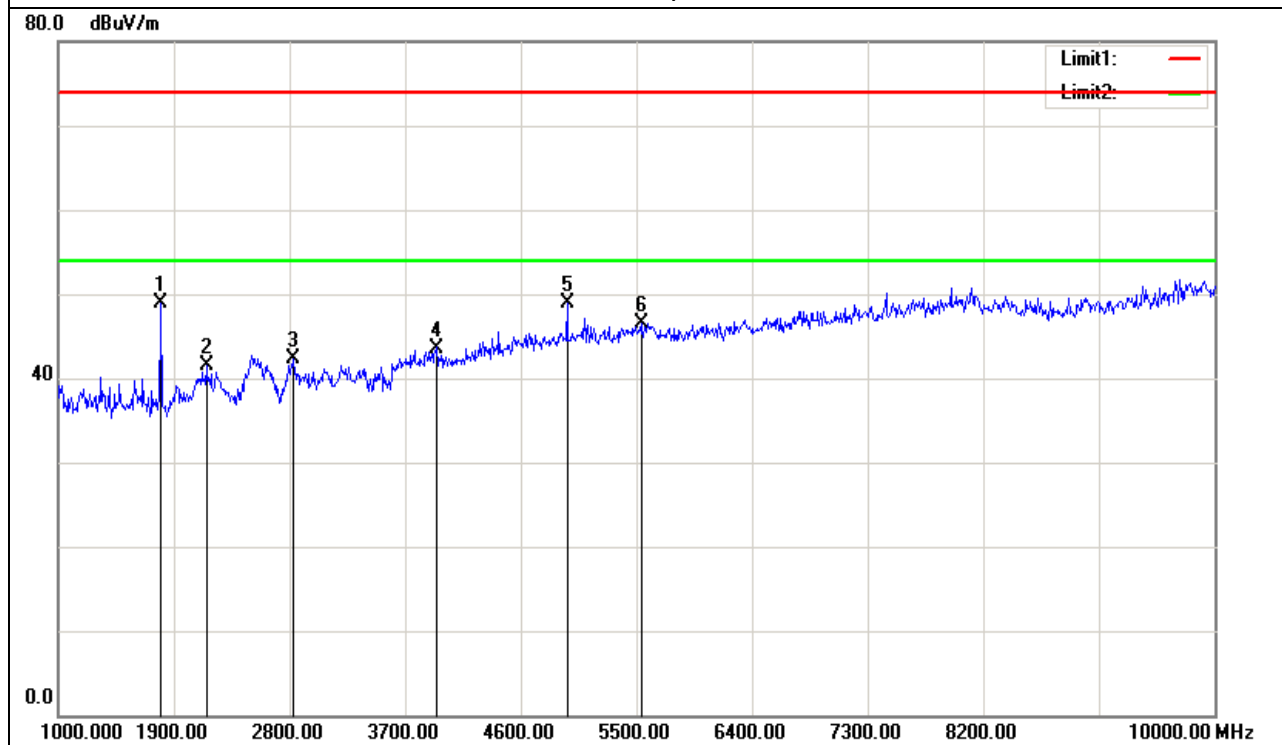


Horizontal

Detect: 10GHz -26.5GHz

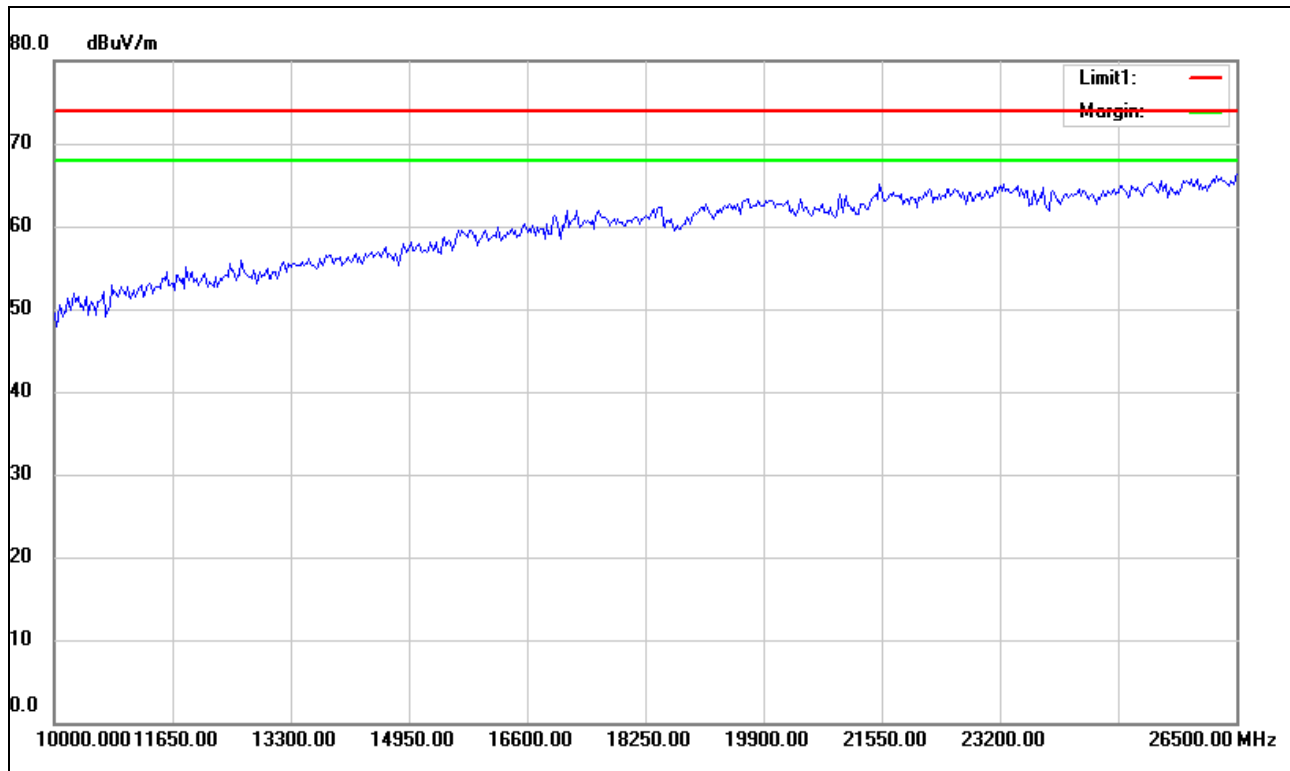

Vertical

Detect: 10GHz -26.5GHz

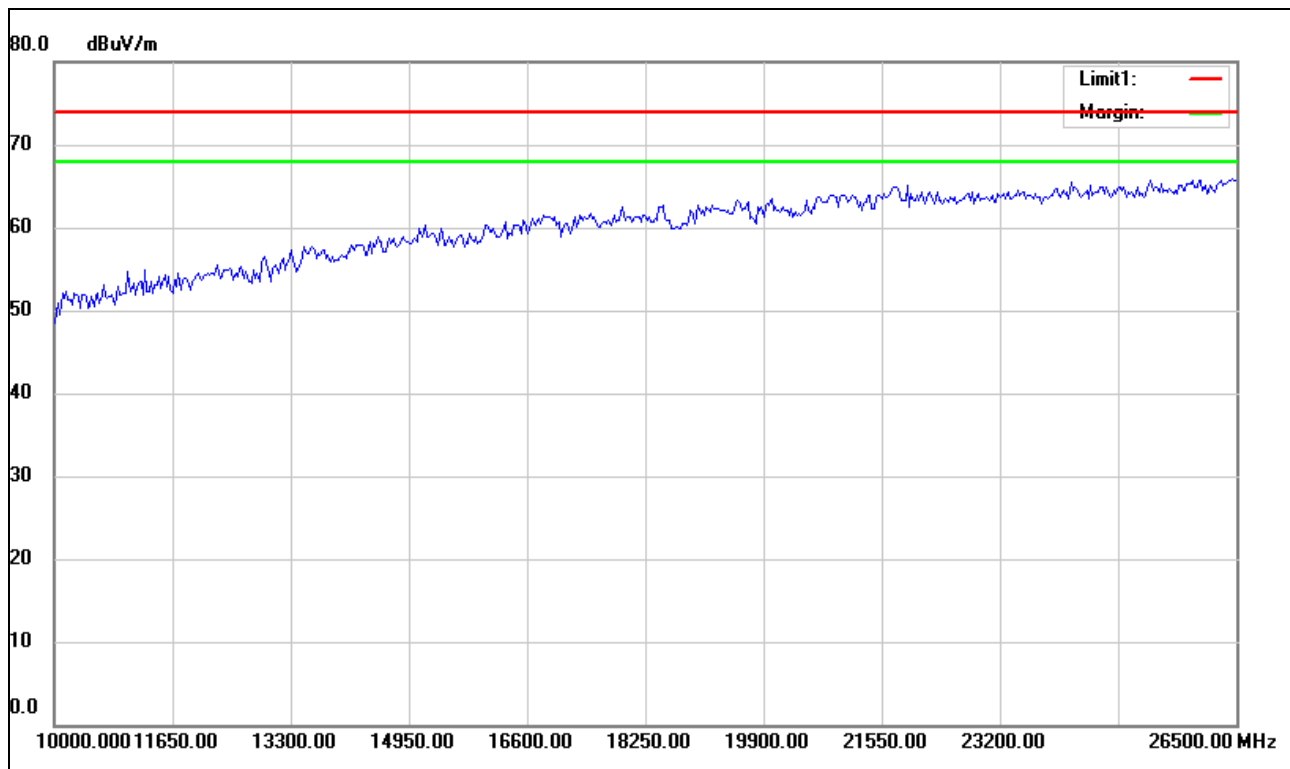


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	RX 2402MHz (1Mbps-worst case)	Polarization :	Horizontal
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1738.000	50.48	-6.40	44.08	74.00	-29.92	peak
1909.000	50.75	-5.58	45.17	74.00	-28.83	peak
2017.000	48.04	-4.91	43.13	74.00	-30.87	peak
2809.000	44.43	-1.70	42.73	74.00	-31.27	peak
4870.000	41.35	4.56	45.91	74.00	-28.09	peak
5842.000	41.04	6.01	47.05	74.00	-26.95	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

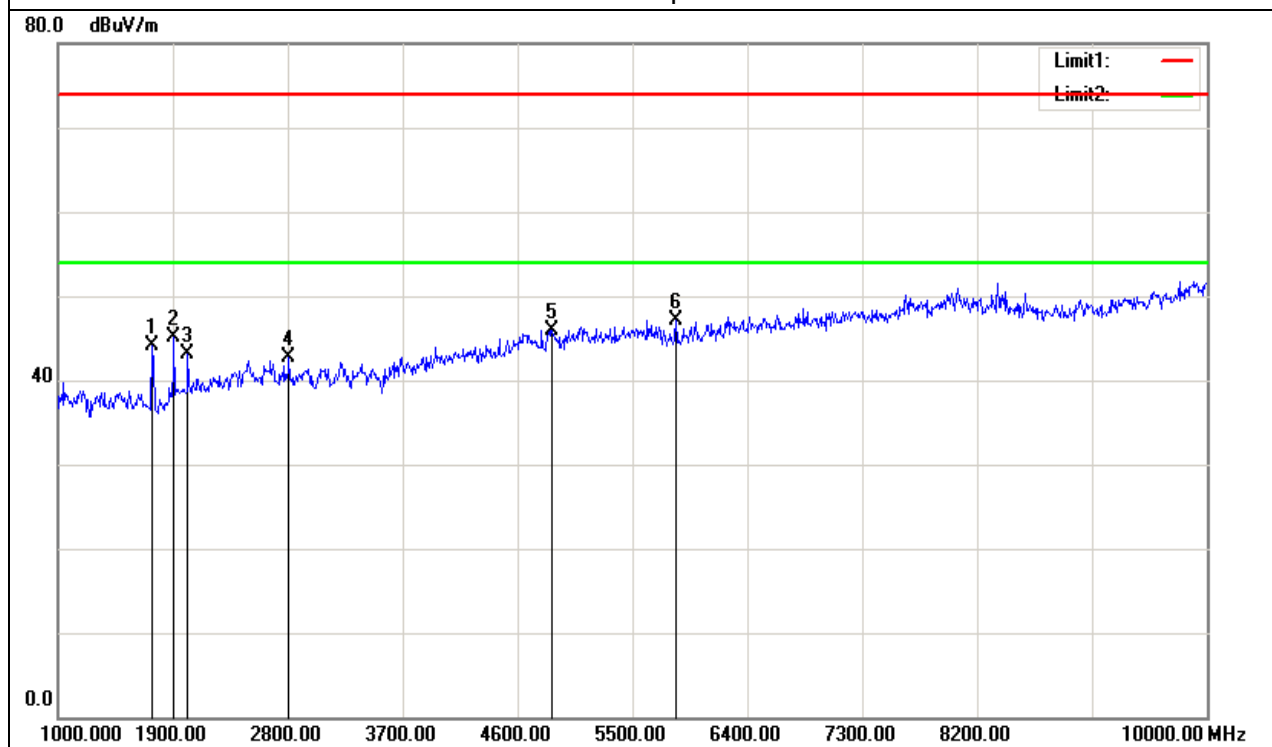


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	RX 2402MHz (1Mbps-worst case)	Polarization :	Vertical
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1747.000	50.57	-6.38	44.19	74.00	-29.81	peak
1909.000	49.39	-5.58	43.81	74.00	-30.19	peak
2539.000	45.23	-2.19	43.04	74.00	-30.96	peak
3061.000	44.17	-1.26	42.91	74.00	-31.09	peak
3682.000	42.29	0.25	42.54	74.00	-31.46	peak
4870.000	41.78	4.56	46.34	74.00	-27.66	peak


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

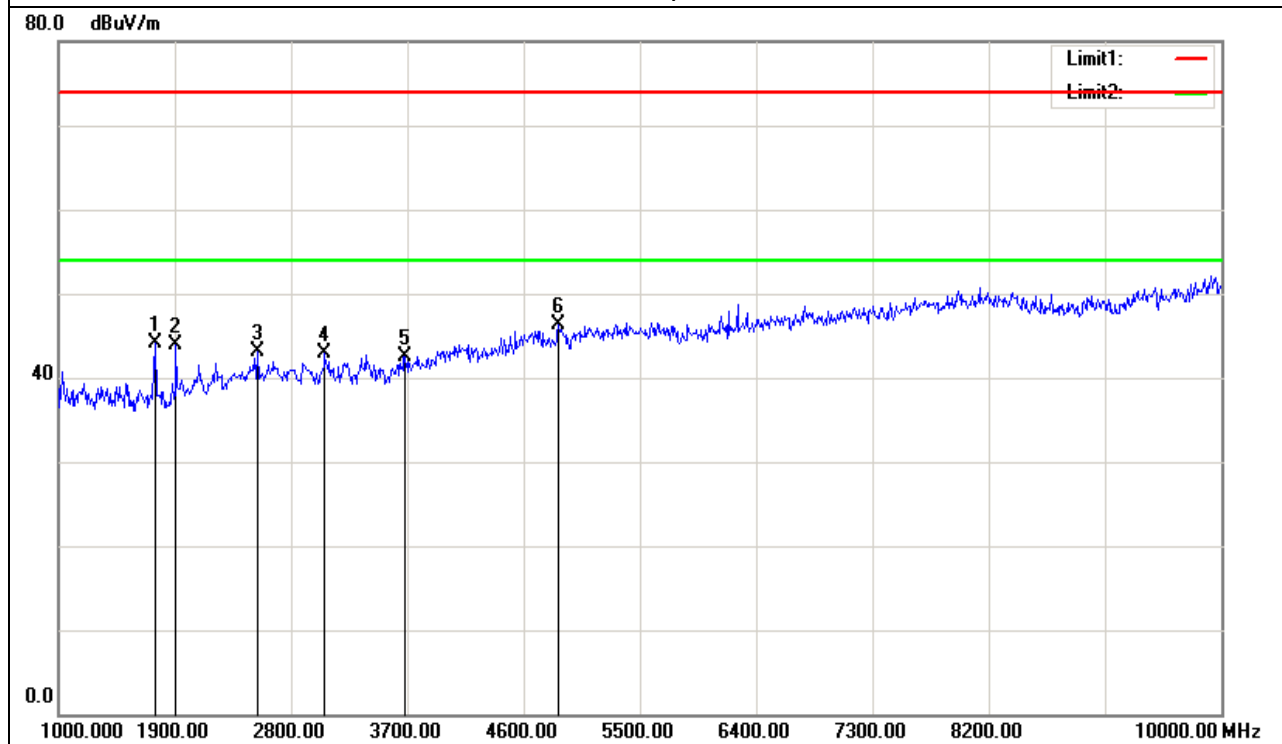


Horizontal

Detect: 10GHz -26.5GHz

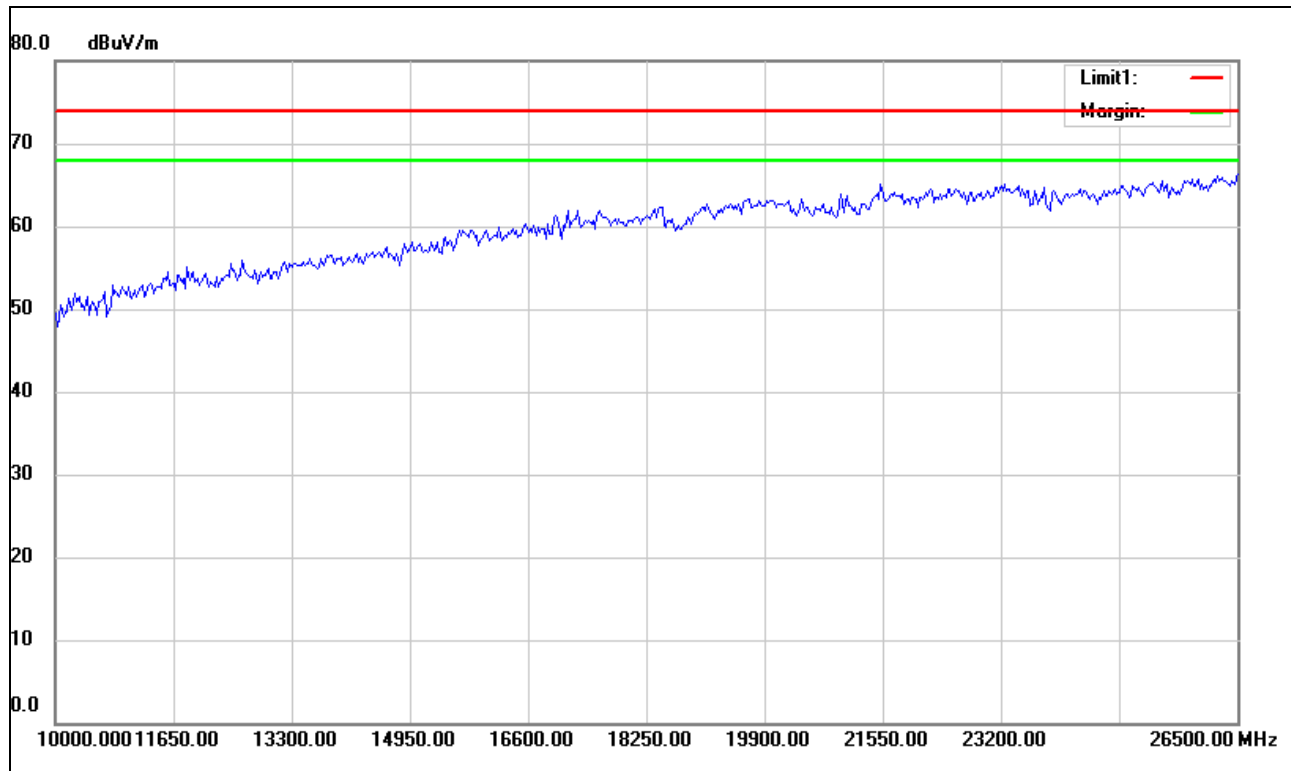

Vertical

Detect: 10GHz -26.5GHz

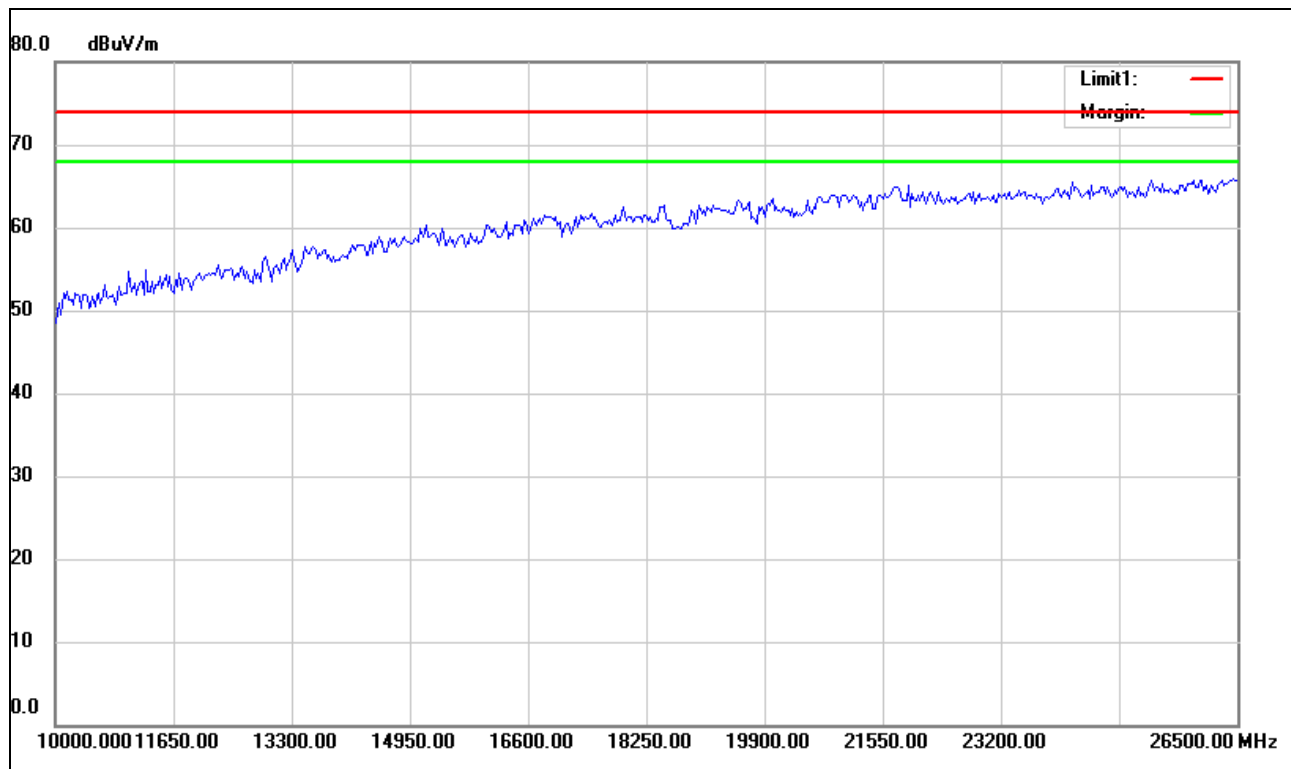


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	RX 2441MHz (1Mbps-worst case)	Polarization :	Horizontal
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1738.000	49.98	-6.40	43.58	74.00	-30.42	peak
1909.000	50.25	-5.58	44.67	74.00	-29.33	peak
2017.000	47.54	-4.91	42.63	74.00	-31.37	peak
5095.000	42.08	5.15	47.23	74.00	-26.77	peak
6841.000	42.03	7.44	49.47	74.00	-24.53	peak
8362.000	42.55	9.45	52.00	74.00	-22.00	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

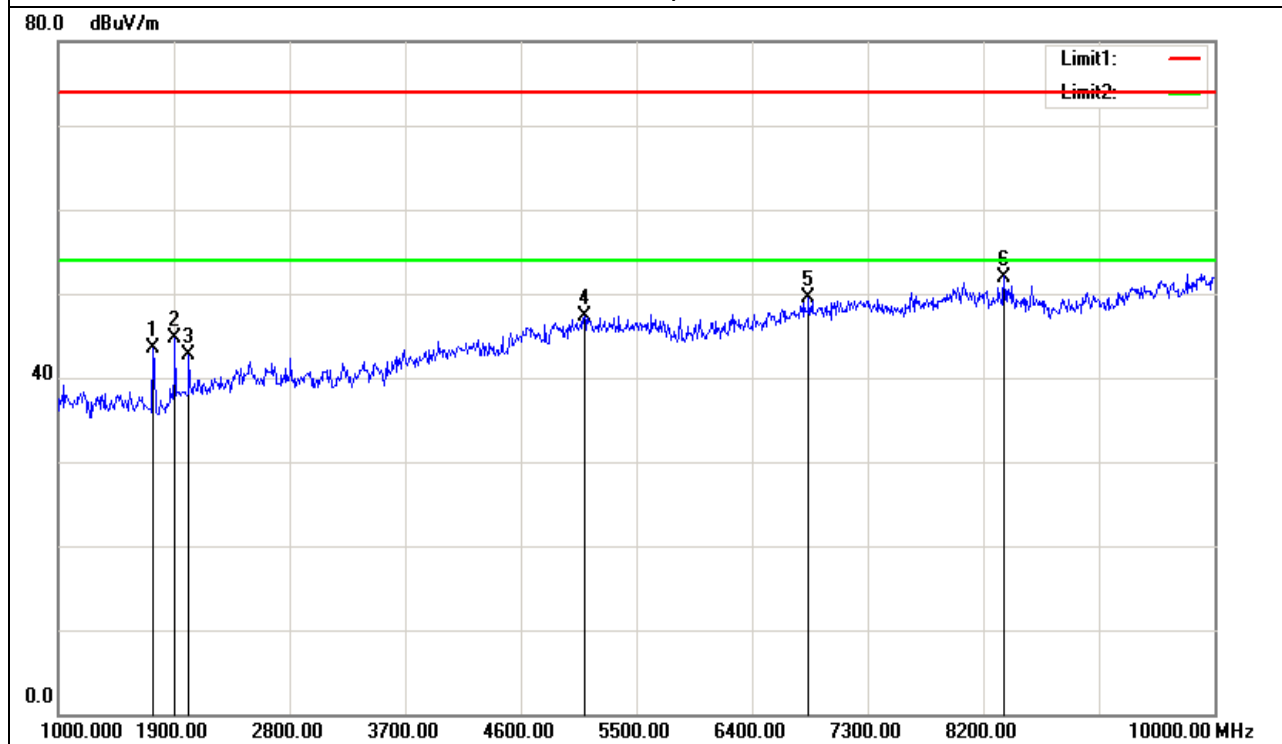


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	RX 2441MHz (1Mbps-worst case)	Polarization :	Vertical
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1747.000	50.07	-6.38	43.69	74.00	-30.31	peak
1909.000	48.89	-5.58	43.31	74.00	-30.69	peak
3376.000	43.95	-0.73	43.22	74.00	-30.78	peak
5077.000	42.07	5.12	47.19	74.00	-26.81	peak
6256.000	42.64	6.49	49.13	74.00	-24.87	peak
7966.000	41.31	9.58	50.89	74.00	-23.11	peak


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

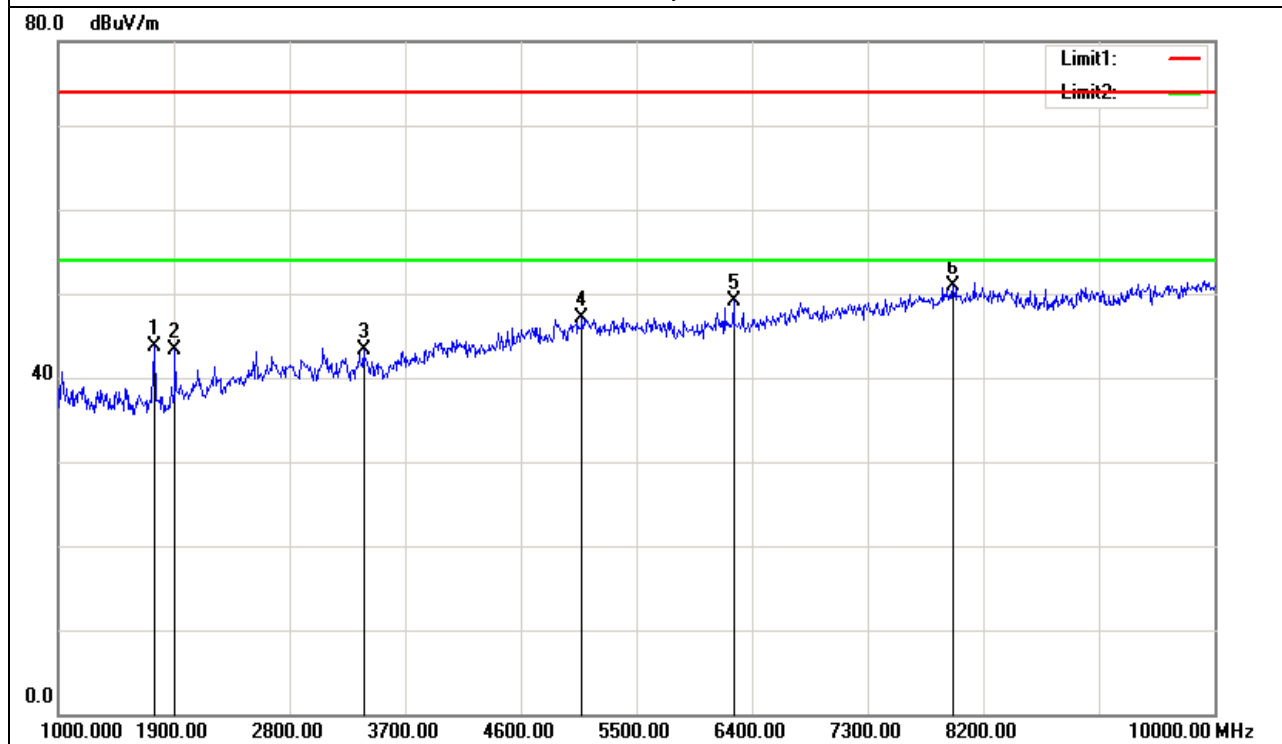


Horizontal

Detect: 10GHz -26.5GHz

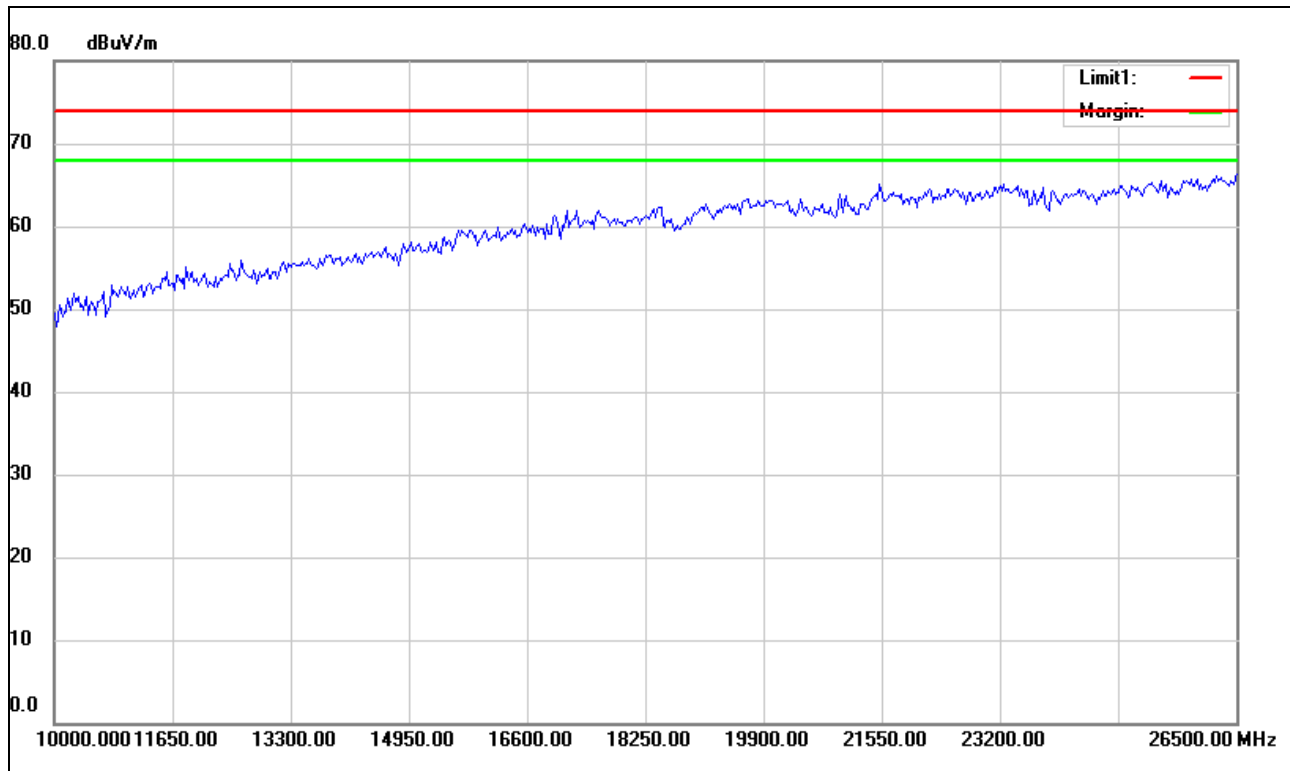

Vertical

Detect: 10GHz -26.5GHz

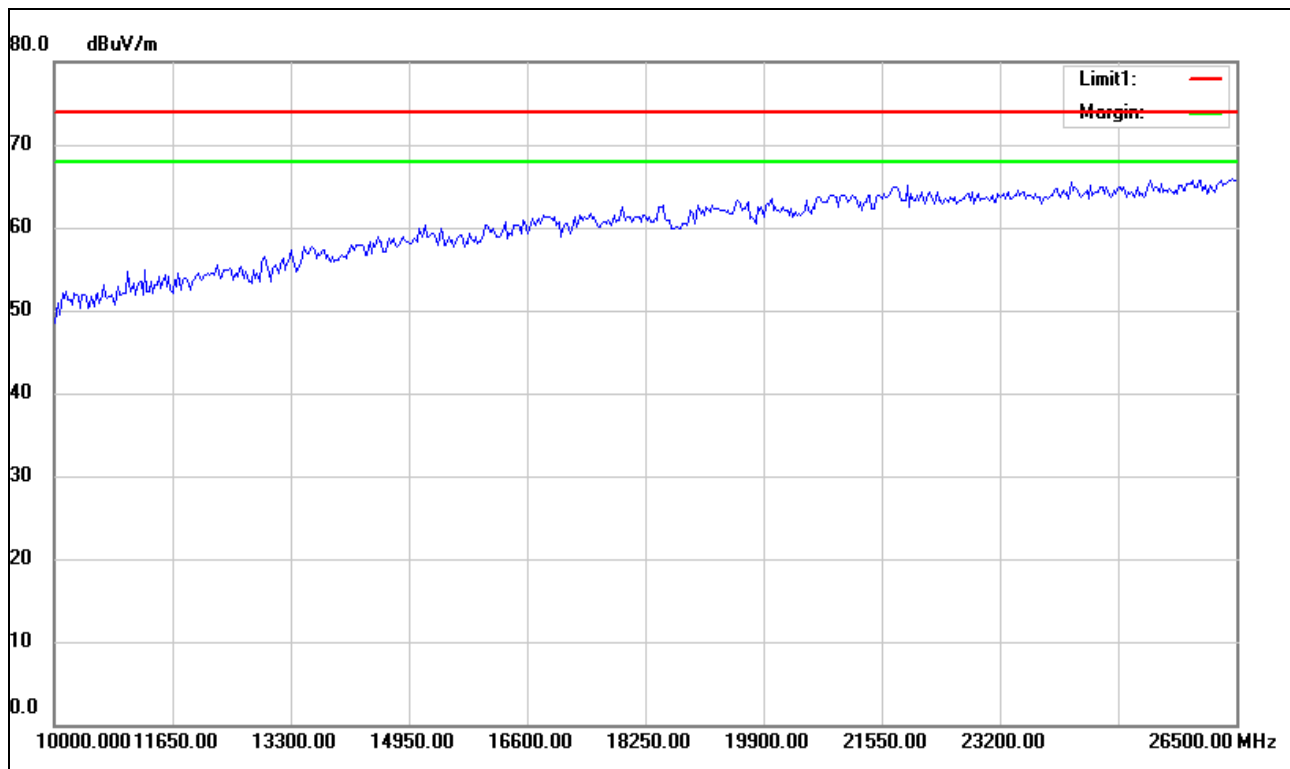


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	RX 2480MHz (1Mbps-worst case)	Polarization :	Horizontal
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1738.000	51.48	-6.40	45.08	74.00	-28.92	peak
1909.000	51.75	-5.58	46.17	74.00	-27.83	peak
2809.000	46.93	-1.70	45.23	74.00	-28.77	peak
4645.000	43.12	3.82	46.94	74.00	-27.06	peak
5428.000	41.59	5.74	47.33	74.00	-26.67	peak
8362.000	43.55	9.45	53.00	74.00	-21.00	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

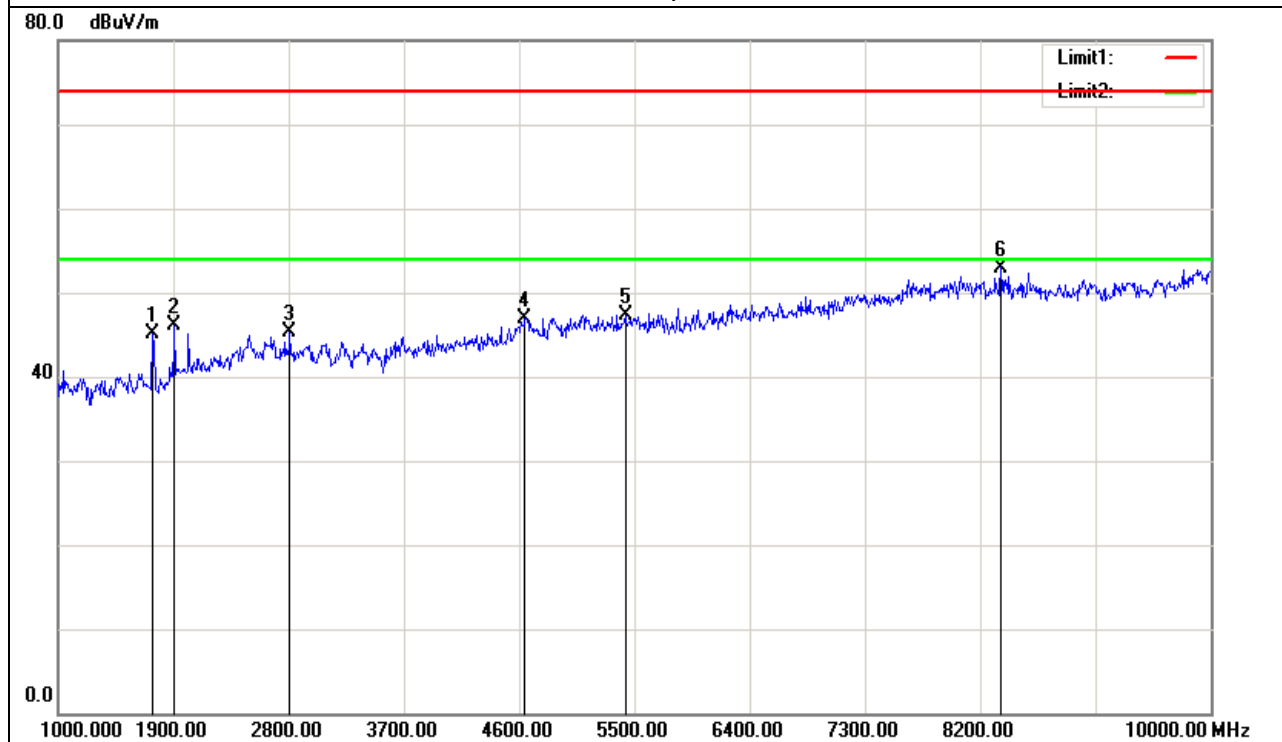


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-08-28
Test Mode :	RX 2480MHz (1Mbps-worst case)	Polarization :	Vertical
Test Power :	DC 3.7V from battery		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1747.000	51.57	-6.38	45.19	74.00	-28.81	peak
2539.000	46.73	-2.19	44.54	74.00	-29.46	peak
3376.000	44.45	-0.73	43.72	74.00	-30.28	peak
4870.000	43.28	4.56	47.84	74.00	-26.16	peak
6256.000	43.14	6.49	49.63	74.00	-24.37	peak
8128.000	41.62	9.58	51.20	74.00	-22.80	peak


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

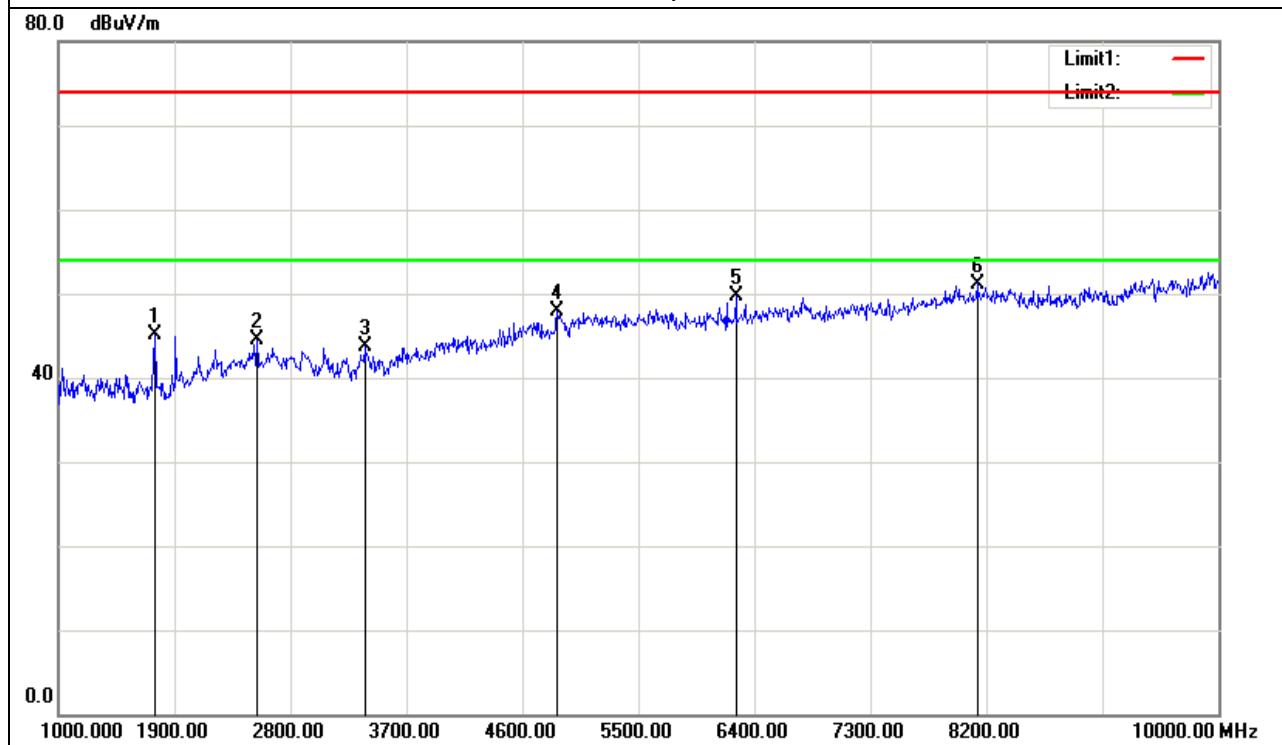


Horizontal

Detect: 10GHz -26.5GHz

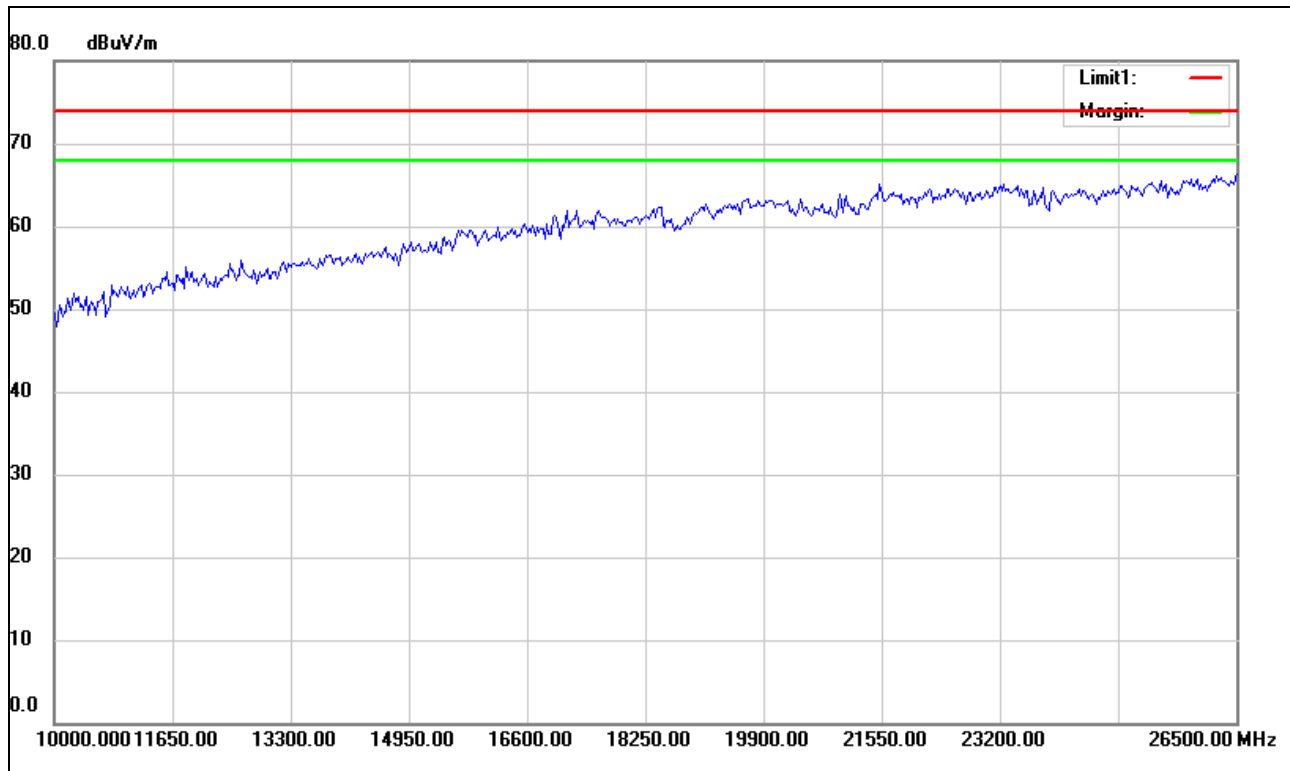

Vertical

Detect: 10GHz -26.5GHz

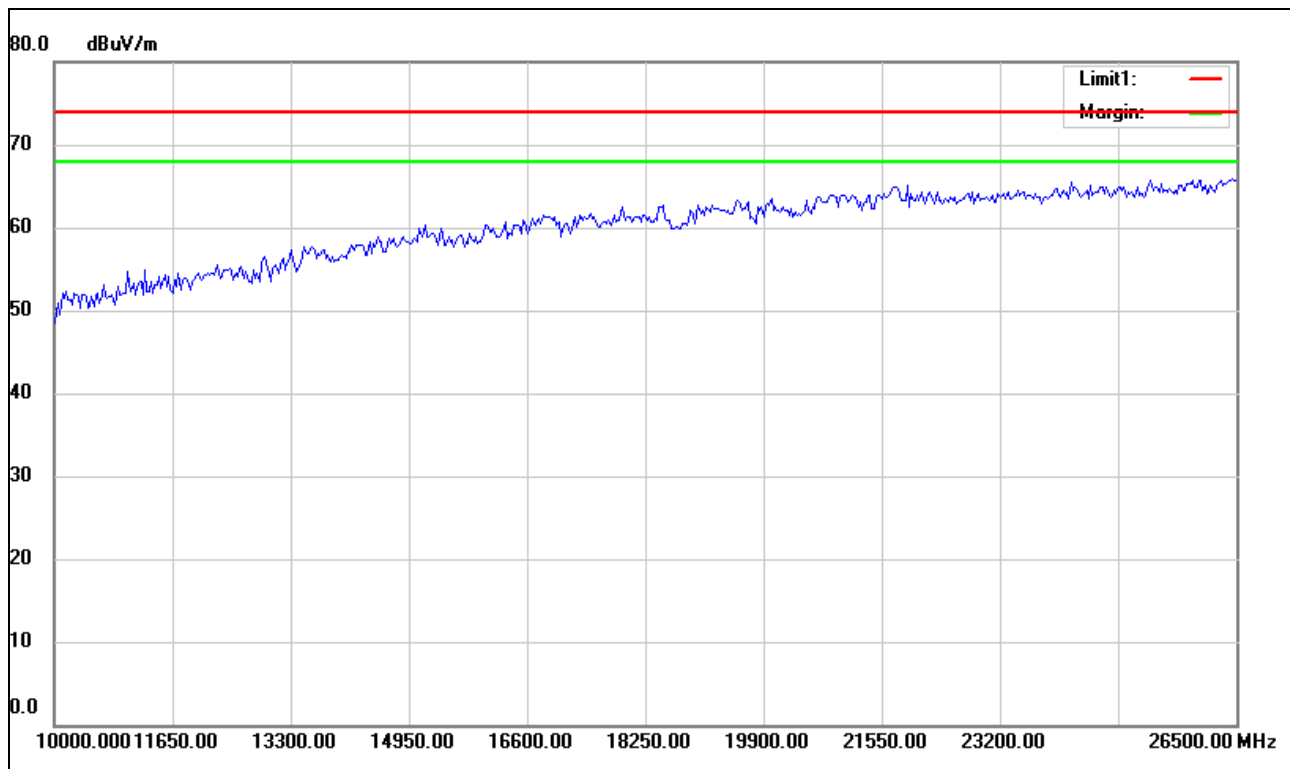

Test result: The unit does meet the NCC requirements.

3.2.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Test Data	2020-07-27
Pressure :	1010 hPa	Relative Humidity :	60%
Test Mode :	TX 1Mbps	Test Voltage :	DC 3.7V from battery
Note :	1. The transmitter was setup to transmit at the lowest channel. Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel. Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Freq. (MHz) (Peak)	Freq. (MHz) (AV)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
			Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.000	2390.000	V	54.25	41.85	-2.86	48.46	36.06	74.00	54.00	CH00
2402.000	2402.100	V	94.92	94.54	-2.80	---	---	---	---	CH00
2390.000	2390.000	H	55.65	44.31	-2.86	49.86	38.52	74.00	54.00	CH00
2401.800	2402.000	H	105.6 8	105.9 3	-2.80	---	---	---	---	CH00
2480.025	2480.000	V	94.14	94.10	-2.37	---	---	---	---	CH78
2483.500	2483.500	V	52.53	42.19	-2.35	47.57	37.23	74.00	54.00	CH78
2479.975	2480.025	H	107.8 7	106.5 6	-2.37	---	---	---	---	CH78
2483.500	2483.500	H	55.96	44.59	-2.35	51.00	39.63	74.00	54.00	CH78

Remark :


- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH-Low (CH00)

Detector mode: Peak

Polarity: Vertical


116.0 dBuV/m

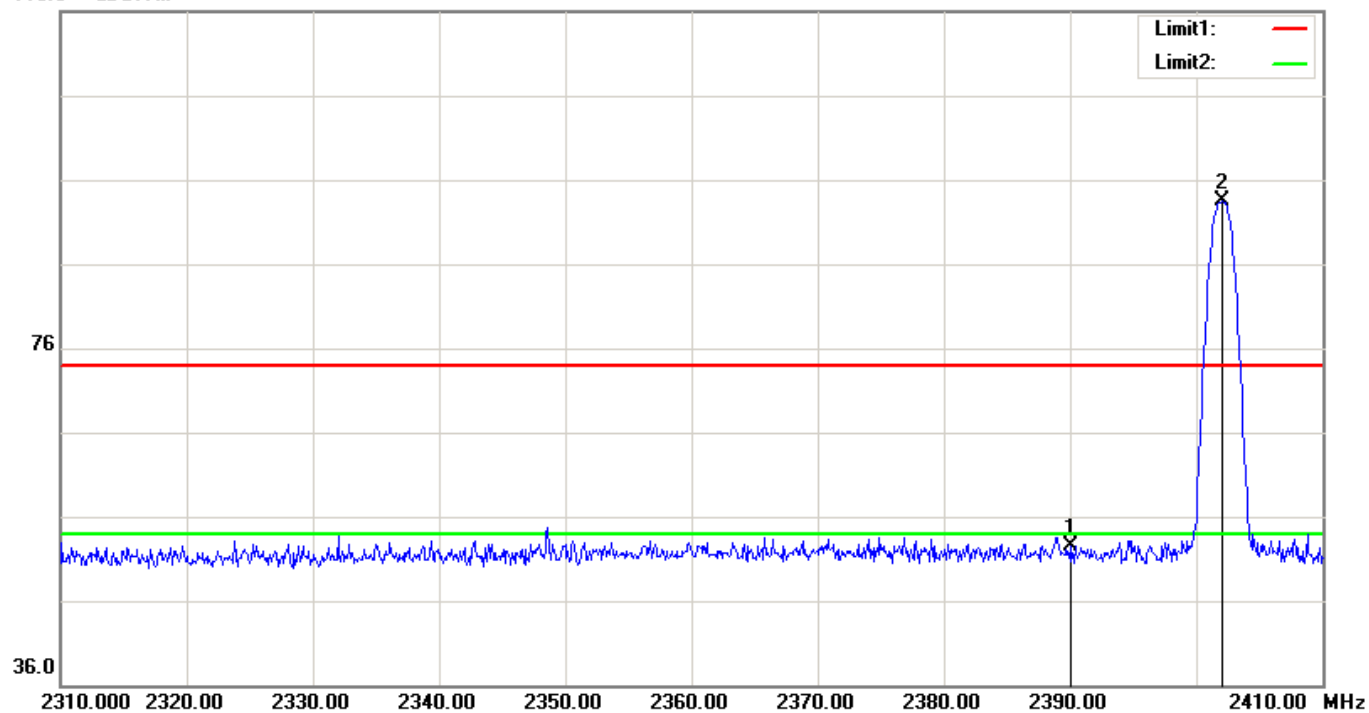

Detector mode: Average

Polarity: Vertical

116.0 dBuV/m

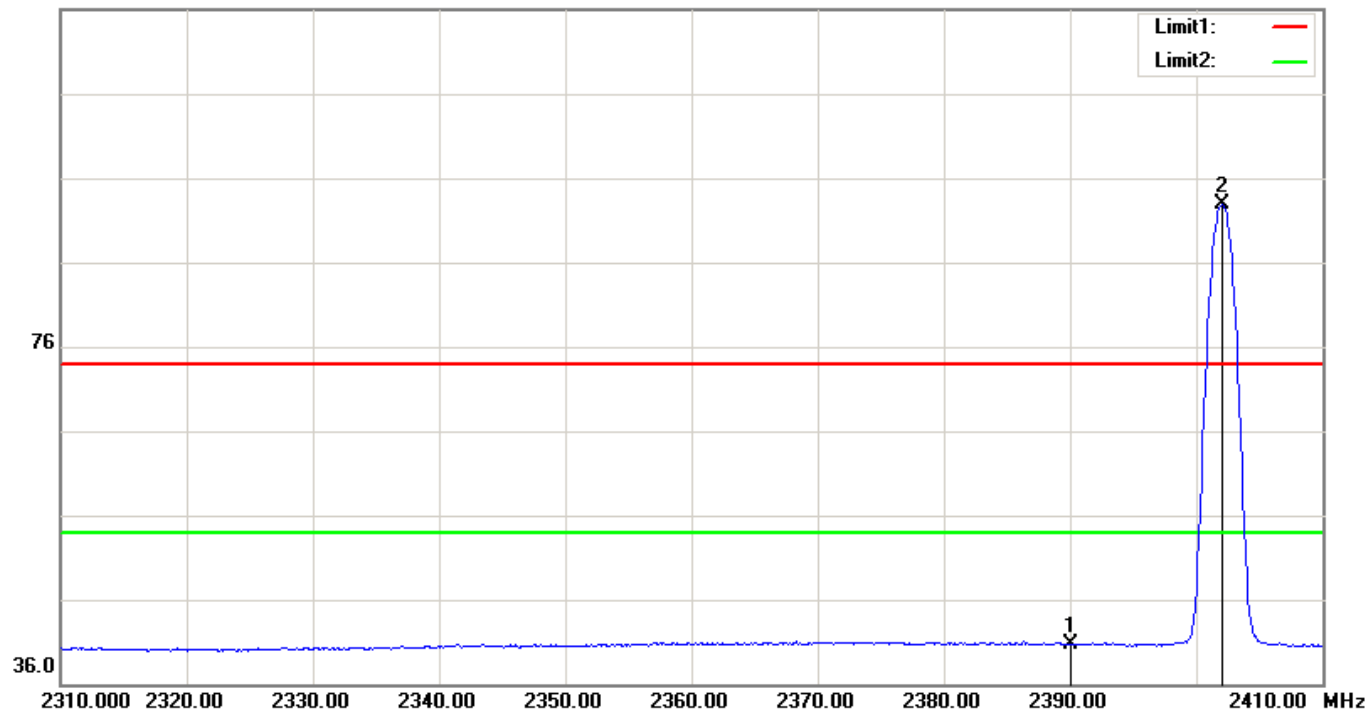


CH-Low (CH00)

Detector mode: Peak

Polarity: Horizontal


116.0 dBuV/m

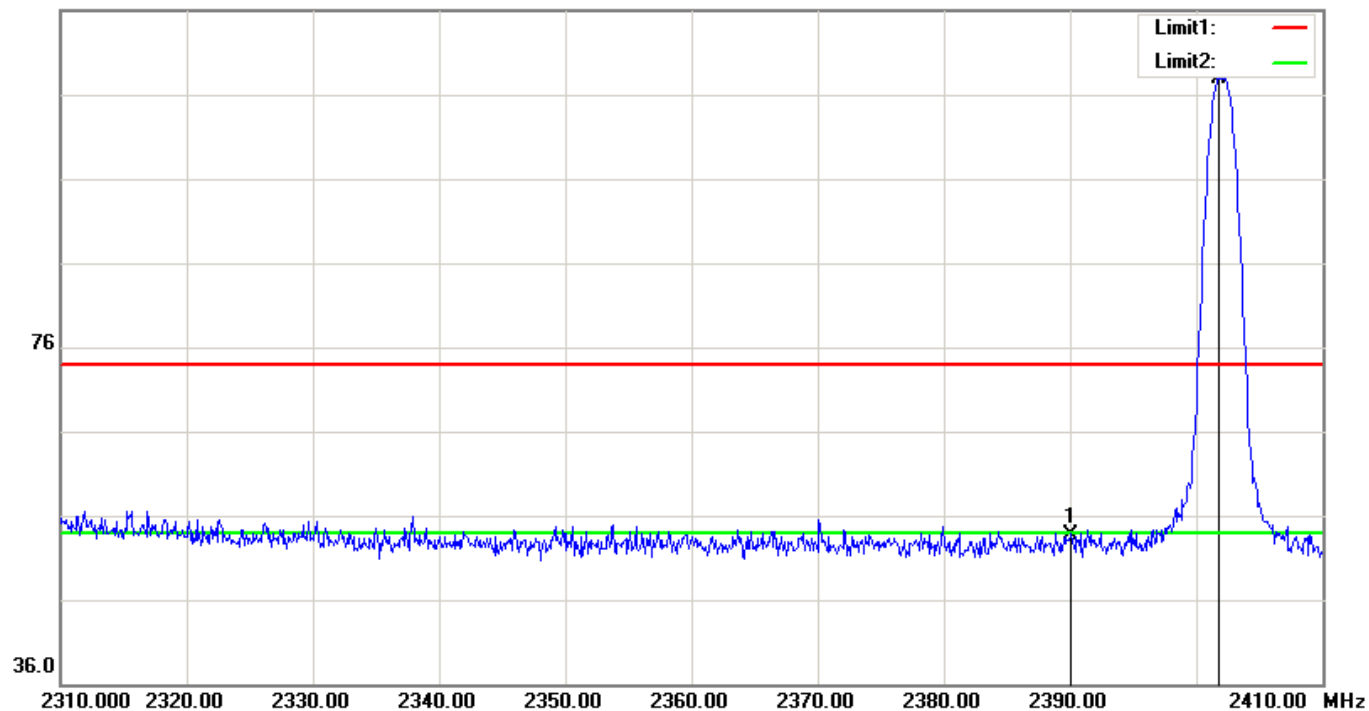

Detector mode: Average

Polarity: Horizontal

116.0 dBuV/m

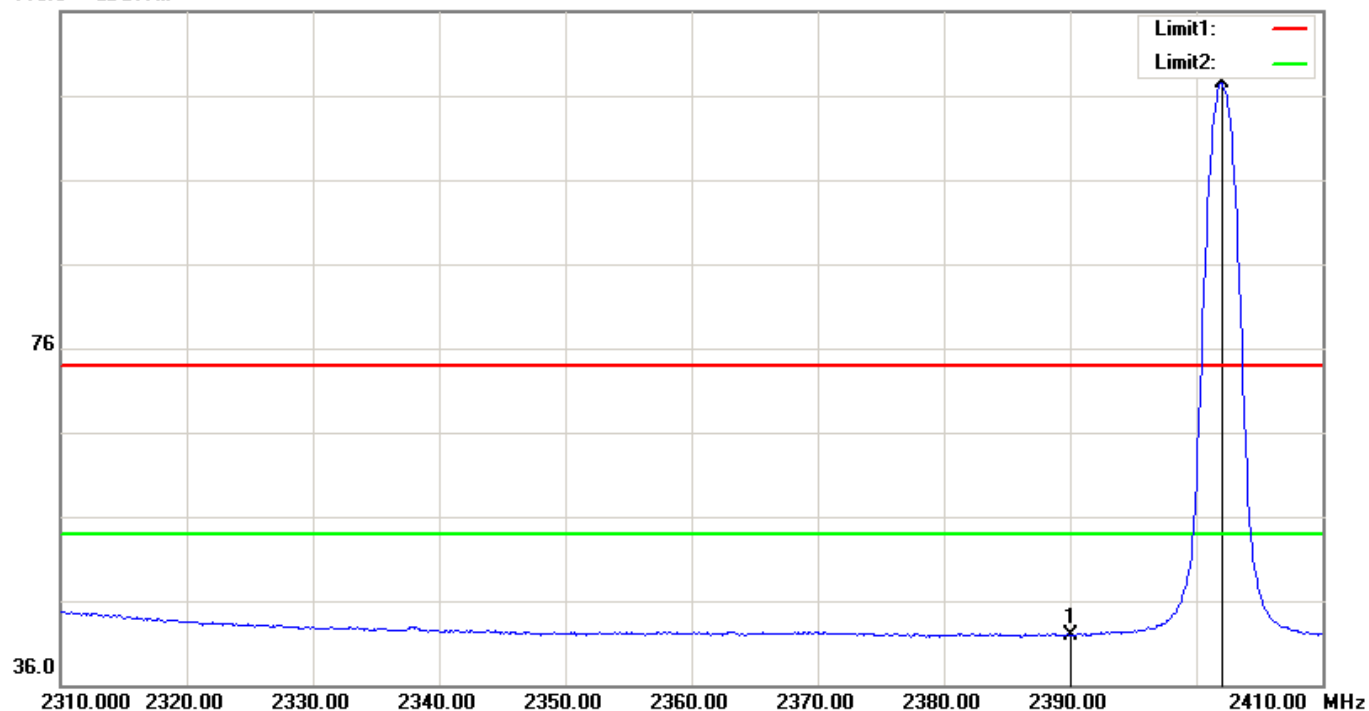


CH-High (CH78)

Detector mode: Peak

Polarity: Vertical


116.0 dBuV/m

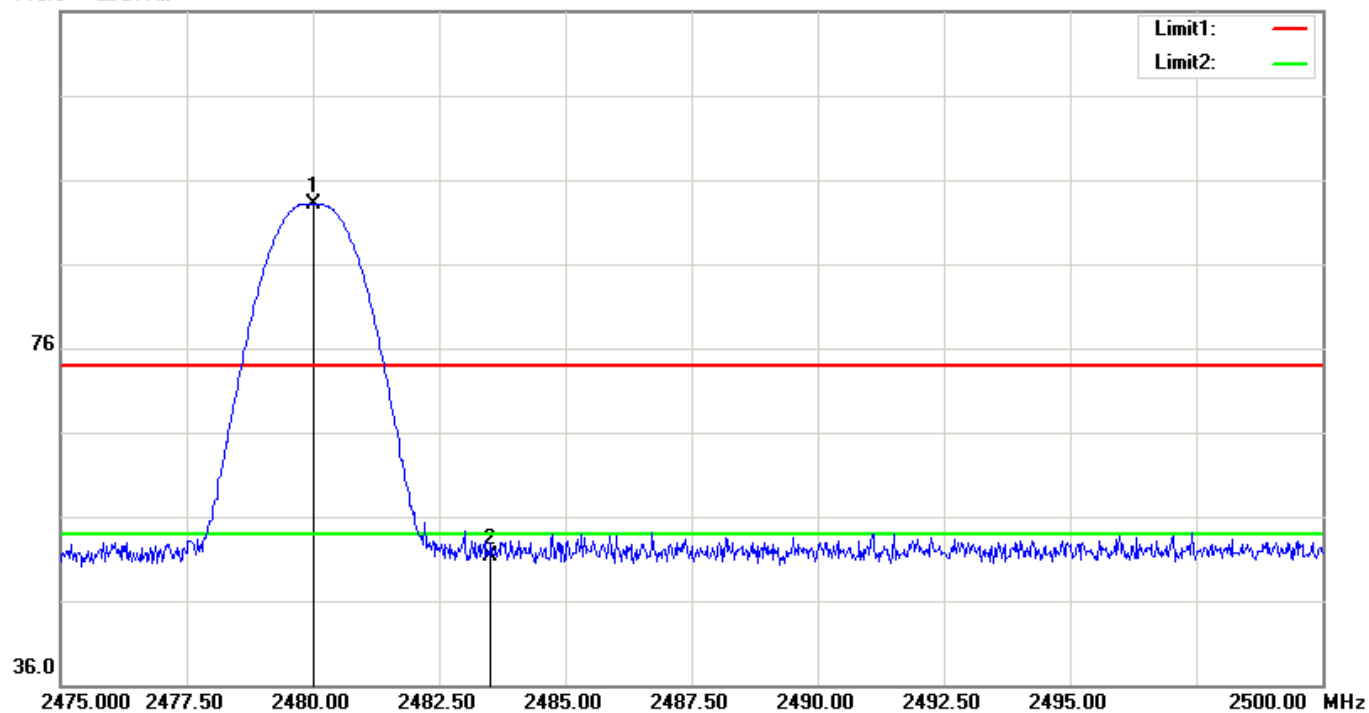

Detector mode: Average

Polarity: Vertical

116.0 dBuV/m

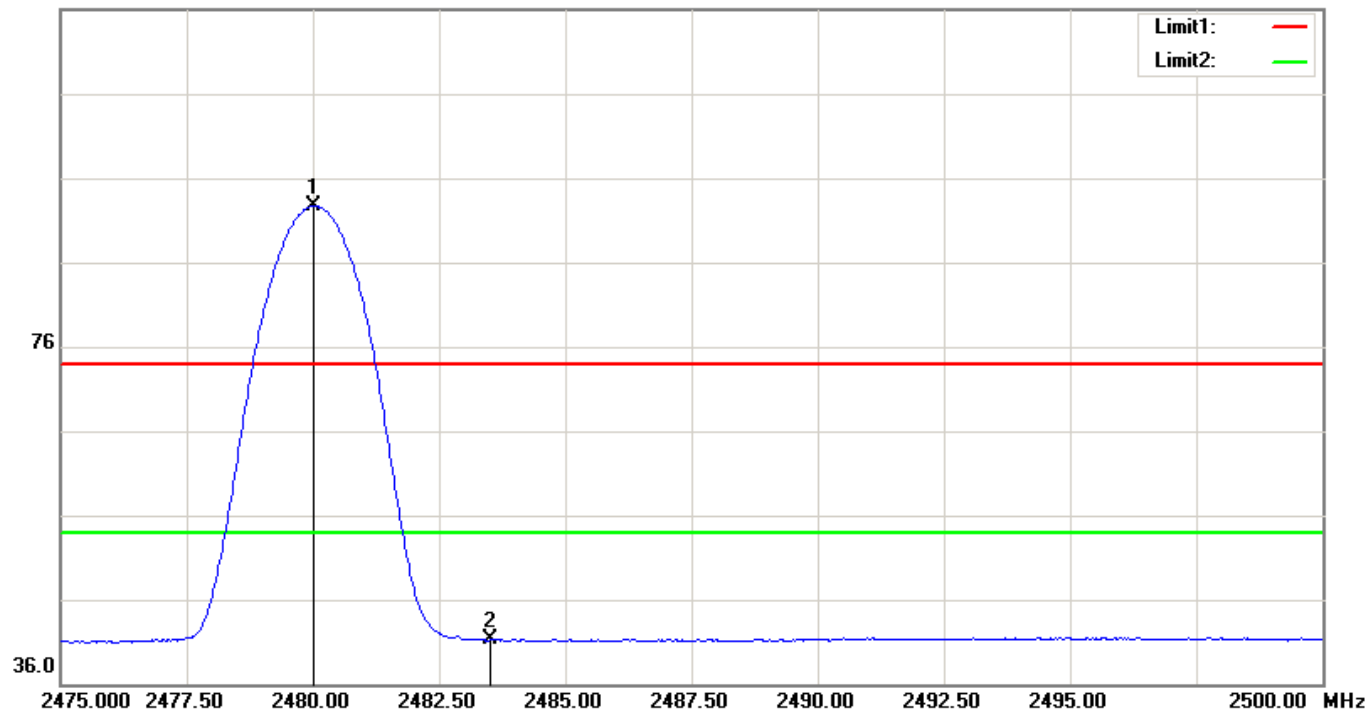


CH-High (CH78)

Detector mode: Peak

Polarity: Horizontal


116.0 dBuV/m

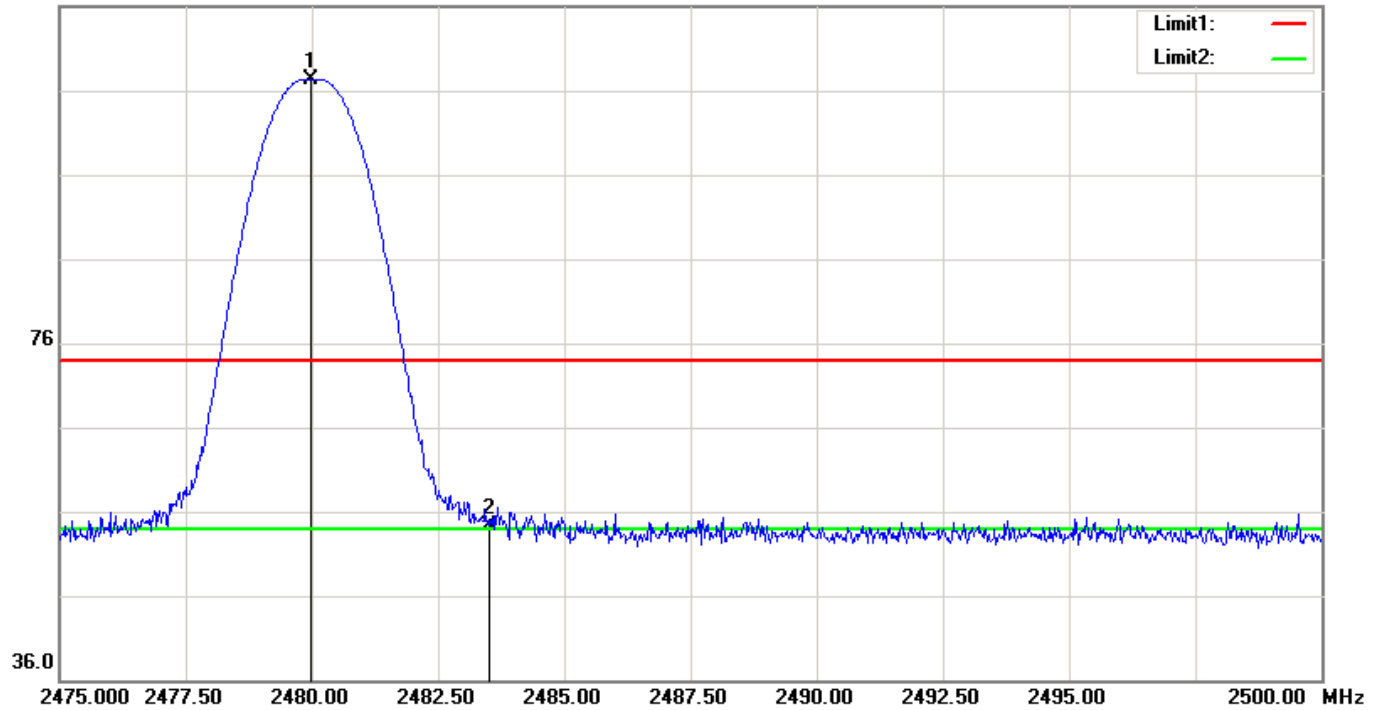

Detector mode: Average

Polarity: Horizontal

116.0 dBuV/m

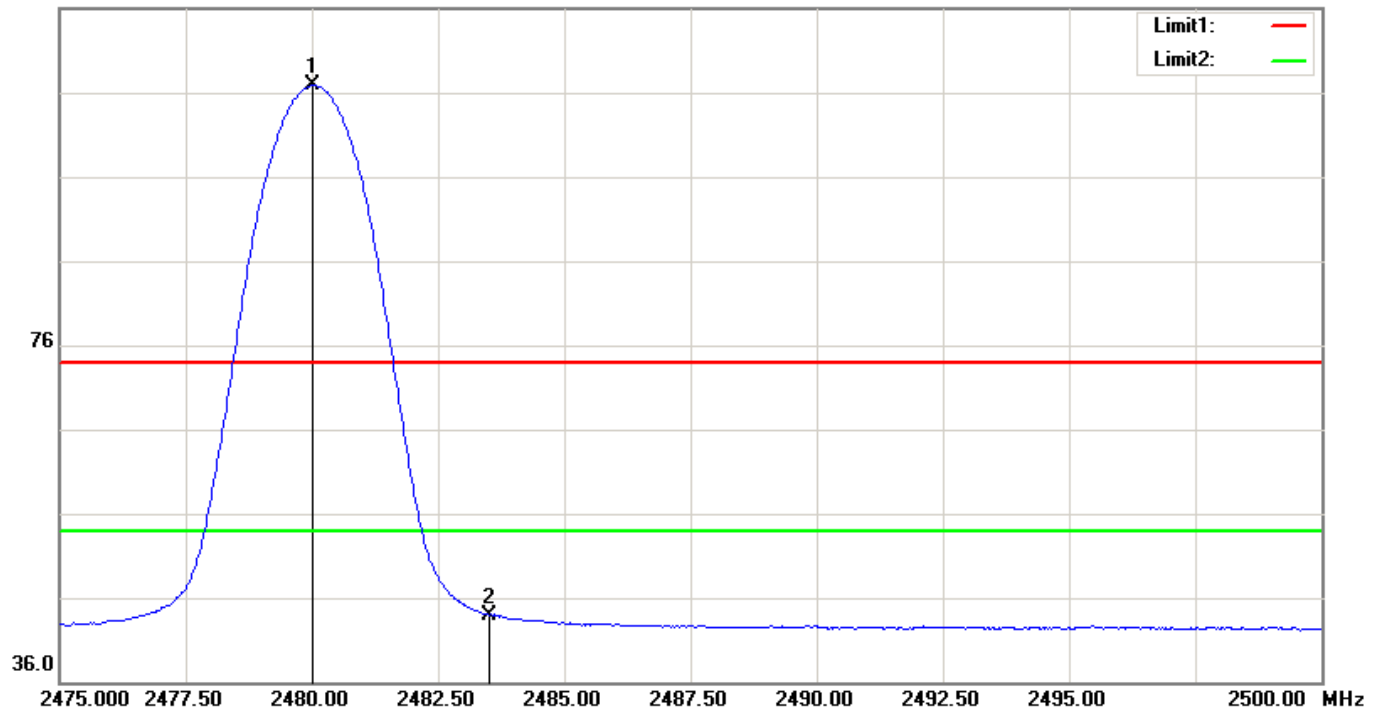

EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Test Data	2020-07-27
Pressure :	1010 hPa	Relative Humidity :	60%
Test Mode :	TX 3Mbps	Test Voltage :	DC 3.7V from battery
Note :	1. The transmitter was setup to transmit at the lowest channel. Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel. Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Freq. (MHz) (Peak)	Freq. (MHz) (AV)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
			Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.000	2390.000	V	52.44	41.58	-2.86	46.65	35.79	74.00	54.00	CH00
2402.000	2402.000	V	96.20	92.02	-2.80	---	---	---	---	CH00
2390.000	2390.000	H	53.64	42.93	-2.86	47.85	37.14	74.00	54.00	CH00
2402.000	2402.000	H	106.4 9	101.5 8	-2.80	---	---	---	---	CH00
2480.025	2480.025	V	95.09	90.61	-2.37	---	---	---	---	CH78
2483.500	2483.500	V	51.87	41.31	-2.35	46.91	36.35	74.00	54.00	CH78
2480.000	2480.025	H	109.4 6	105.0 2	-2.37	---	---	---	---	CH78
2483.500	2483.500	H	54.10	45.58	-2.35	49.14	40.62	74.00	54.00	CH78

Remark :


- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH-Low (CH00)

Detector mode: Peak

Polarity: Vertical


116.0 dBuV/m

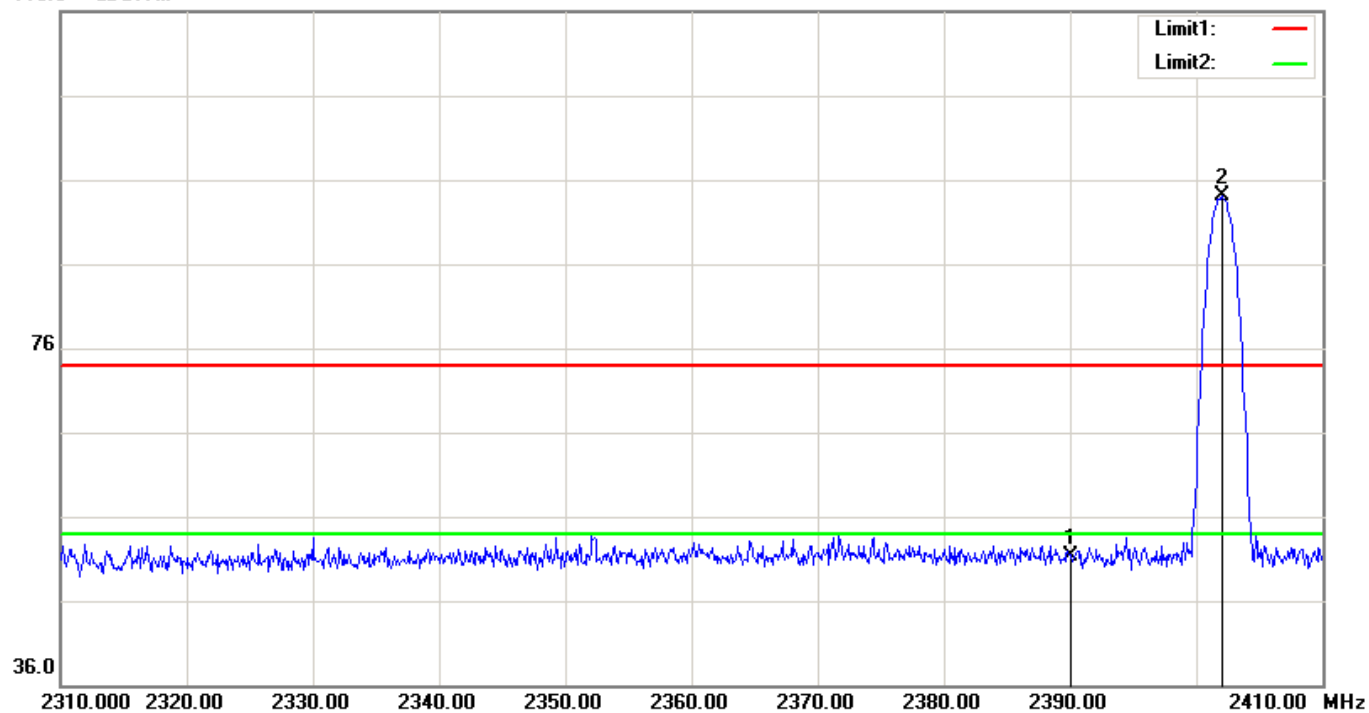

Detector mode: Average

Polarity: Vertical

116.0 dBuV/m

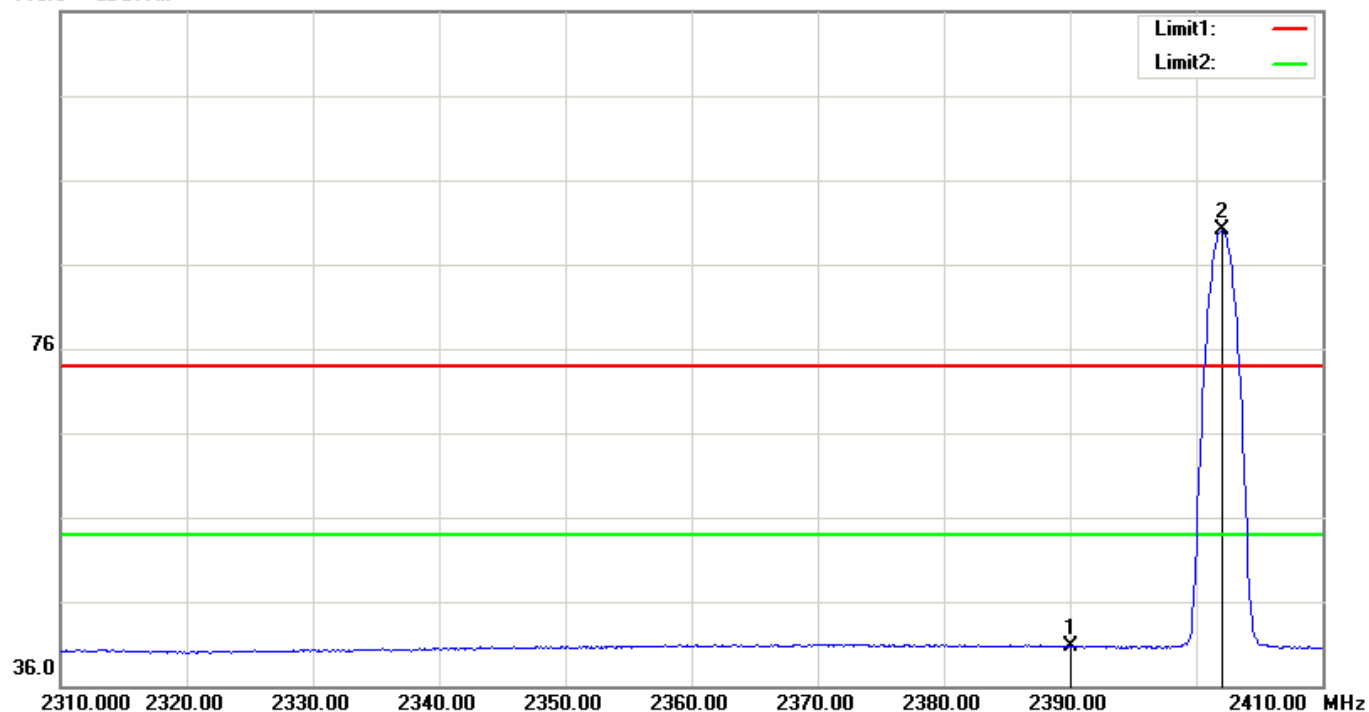


CH-Low (CH00)

Detector mode: Peak

Polarity: Horizontal


116.0 dBuV/m

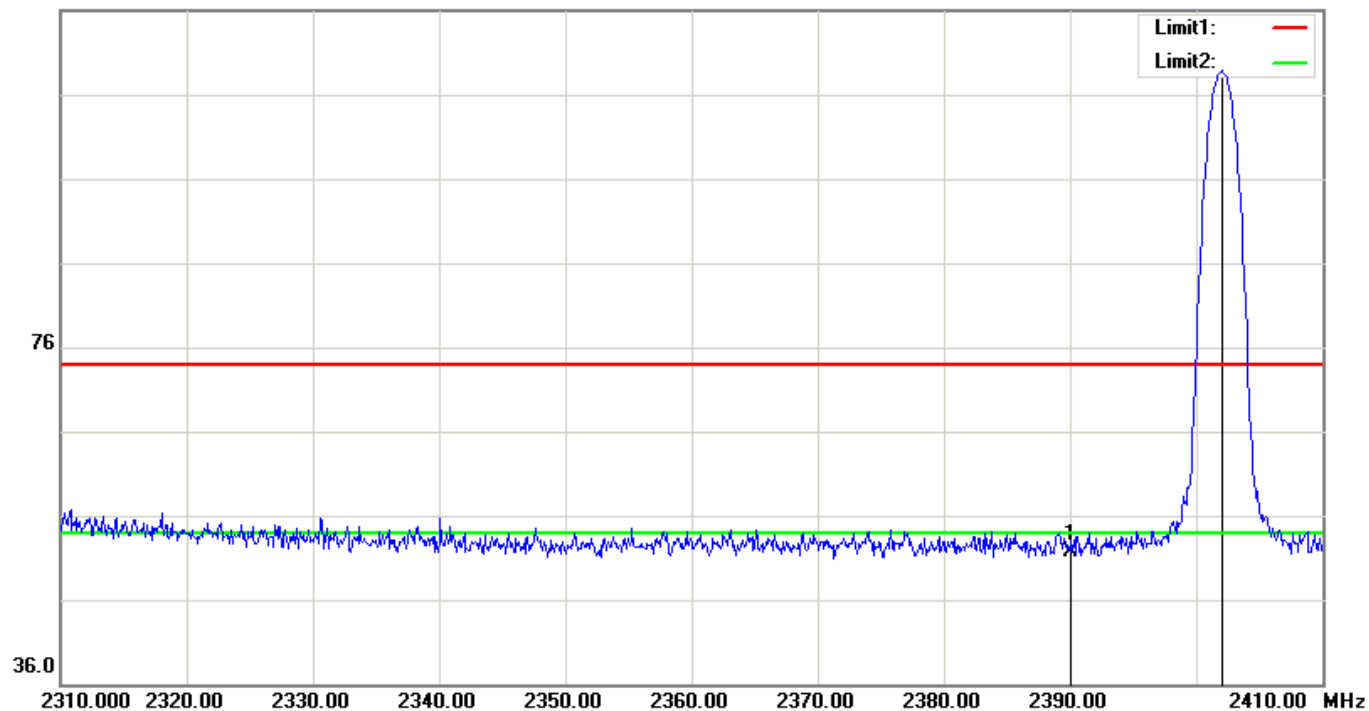

Detector mode: Average

Polarity: Horizontal

116.0 dBuV/m

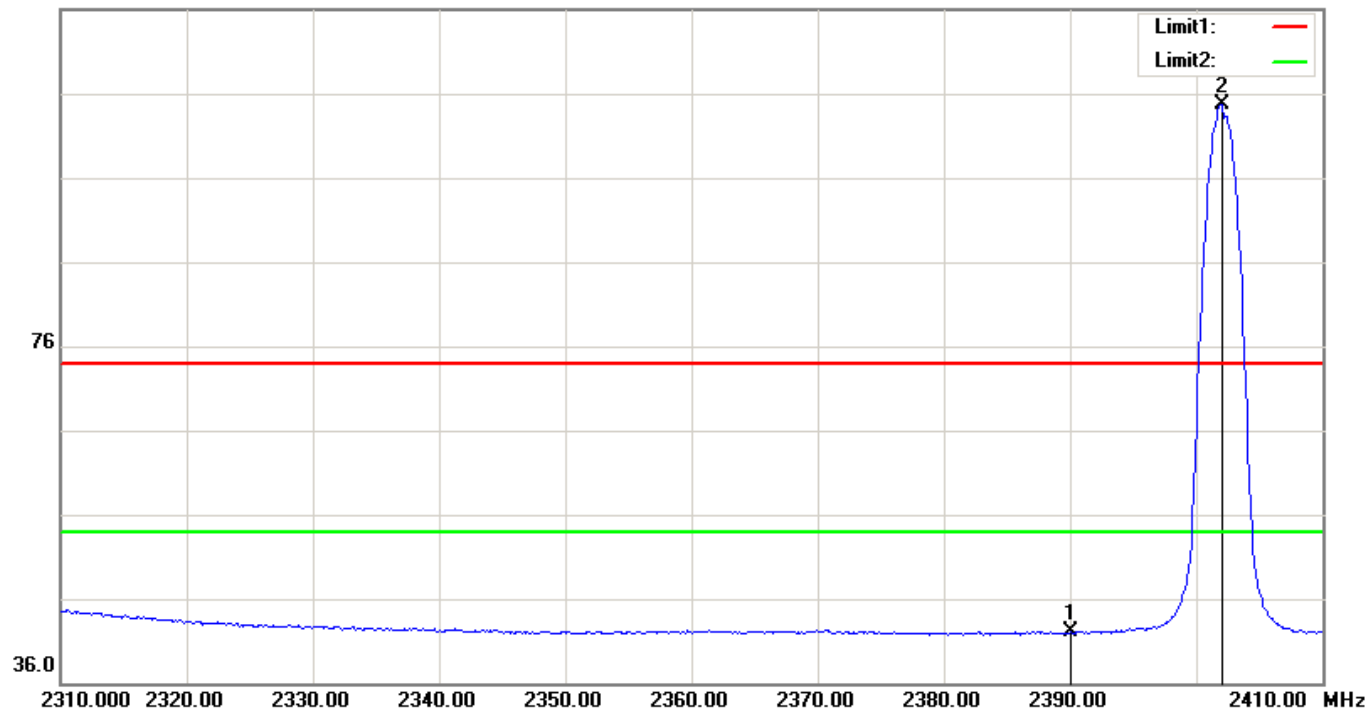


CH-High (CH78)

Detector mode: Peak

Polarity: Vertical


116.0 dBuV/m

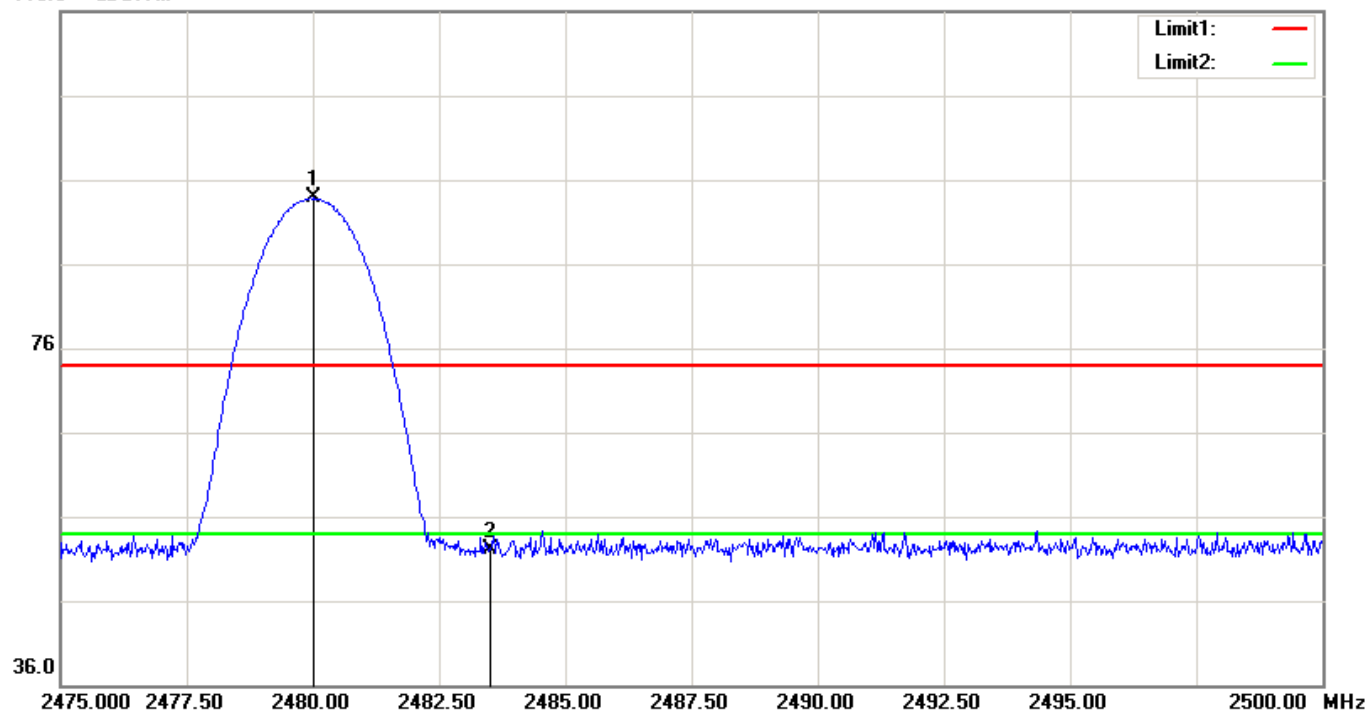

Detector mode: Average

Polarity: Vertical

116.0 dBuV/m

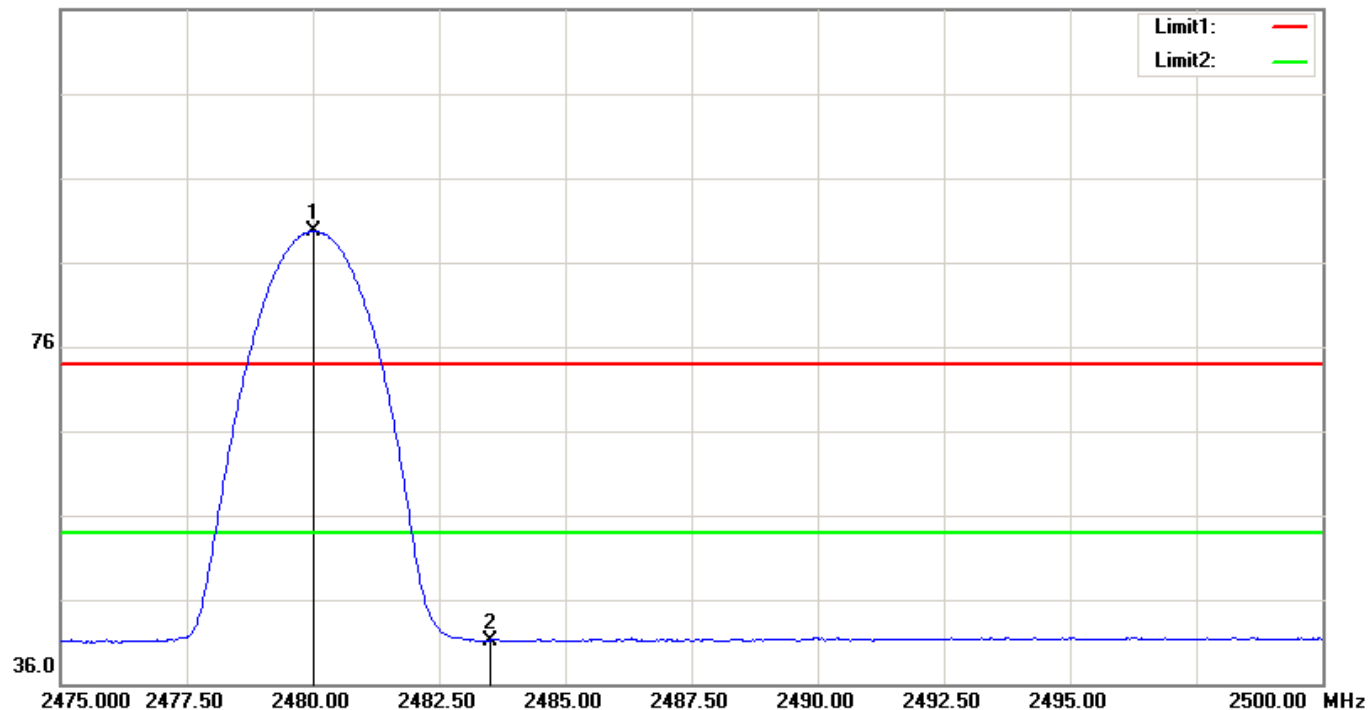


CH-High (CH78)

Detector mode: Peak

Polarity: Horizontal


116.0 dBuV/m

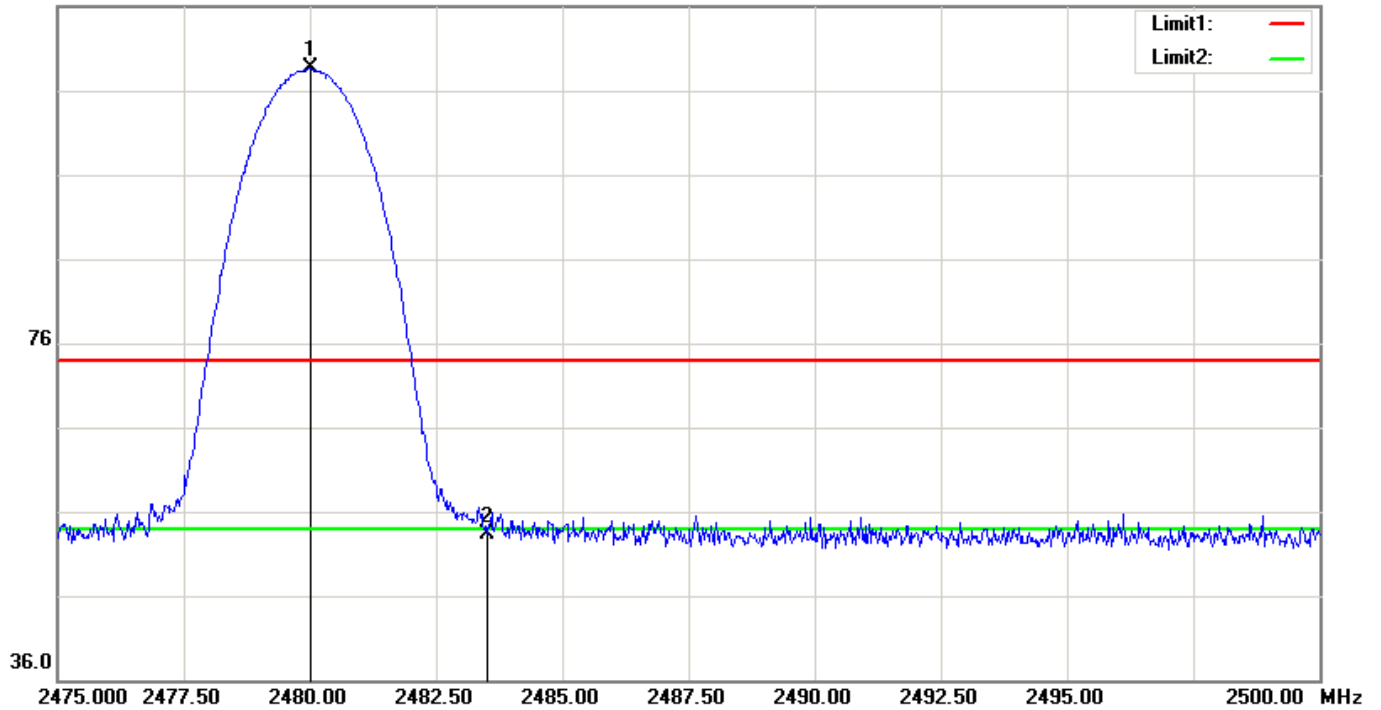

Detector mode: Average

Polarity: Horizontal

116.0 dBuV/m

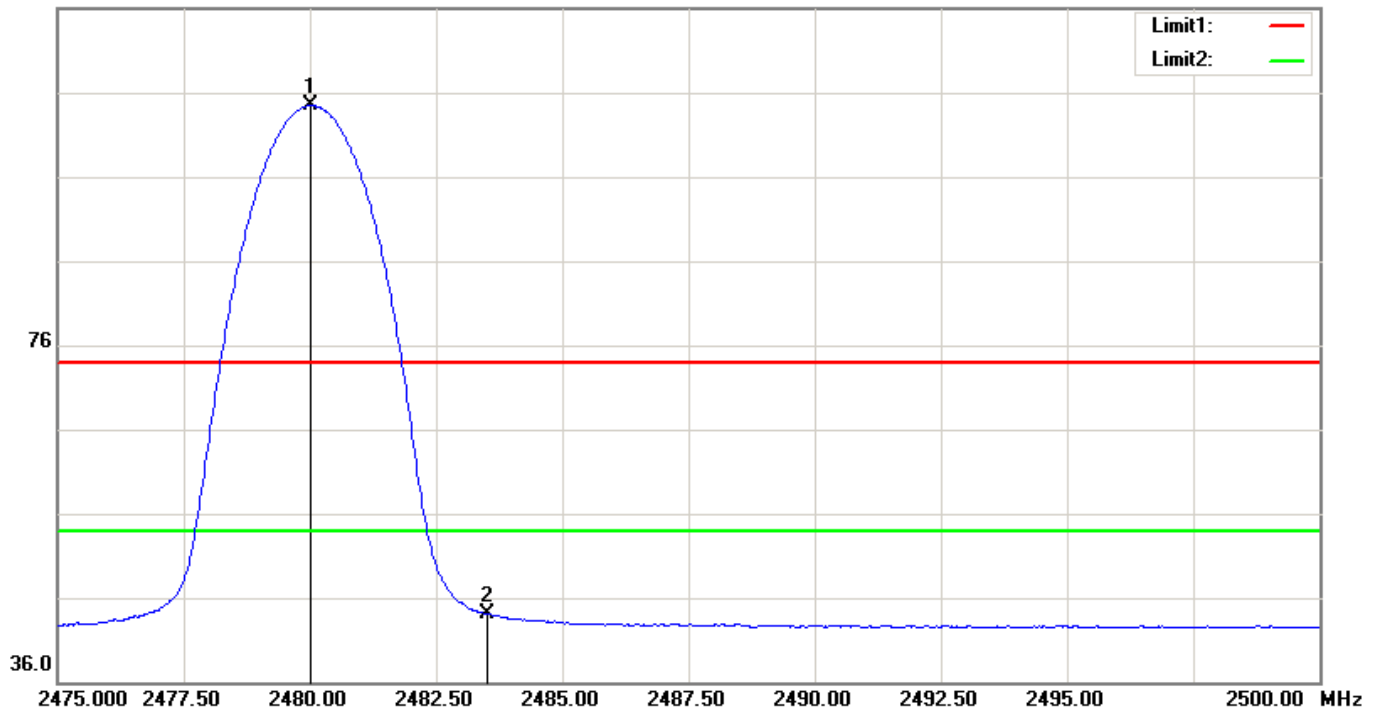

4. OCCUPIED BANDWIDTH TEST

4.1 APPLIED PROCEDURES / LIMIT


LP0002				
Section	Test Item	Limit	Frequency Range (MHz)	Result
3.10.1(6.1.1)	Bandwidth	N/A	2402-2480	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

4.1.2 TEST SETUP

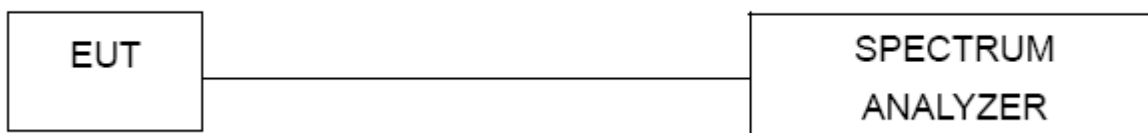

4.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.4 TEST RESULTS


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	CH00 / CH39 /CH78		
Test Date :	2020-07-28		

Modulation Standard	Channel	Frequency (MHz)	20dB Bandwidth (MHz)
GFSK	0	2402	1.1027
	39	2441	1.1027
	78	2480	1.1027
8- DPSK	0	2402	1.3459
	39	2441	1.3415
	78	2480	1.3459

Result plot as follows:


Modulation Standard: GFSK

Channel: 0

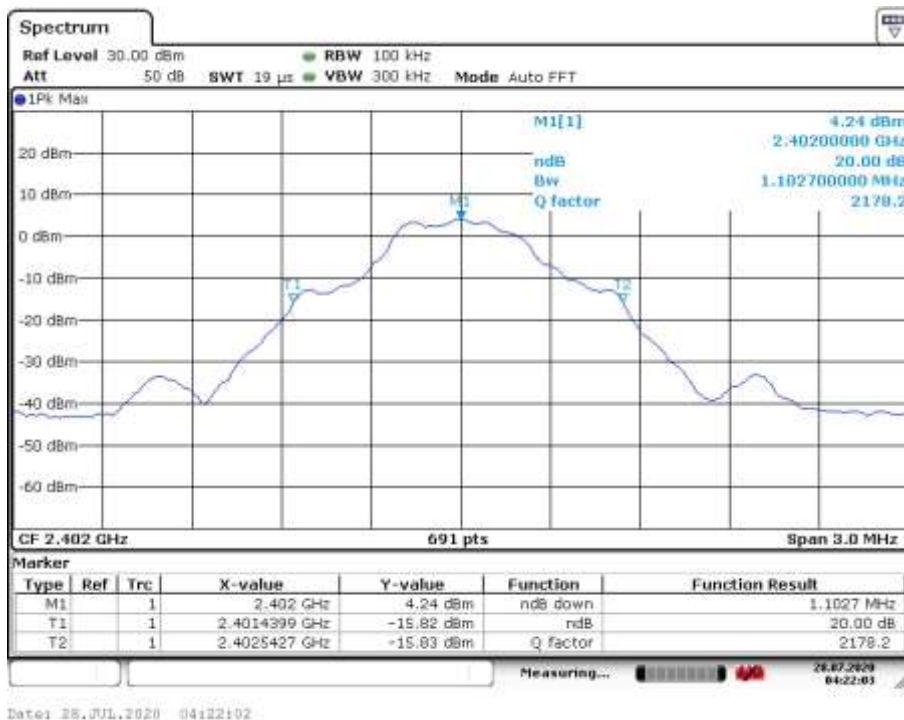


Modulation Standard: GFSK


Channel: 39

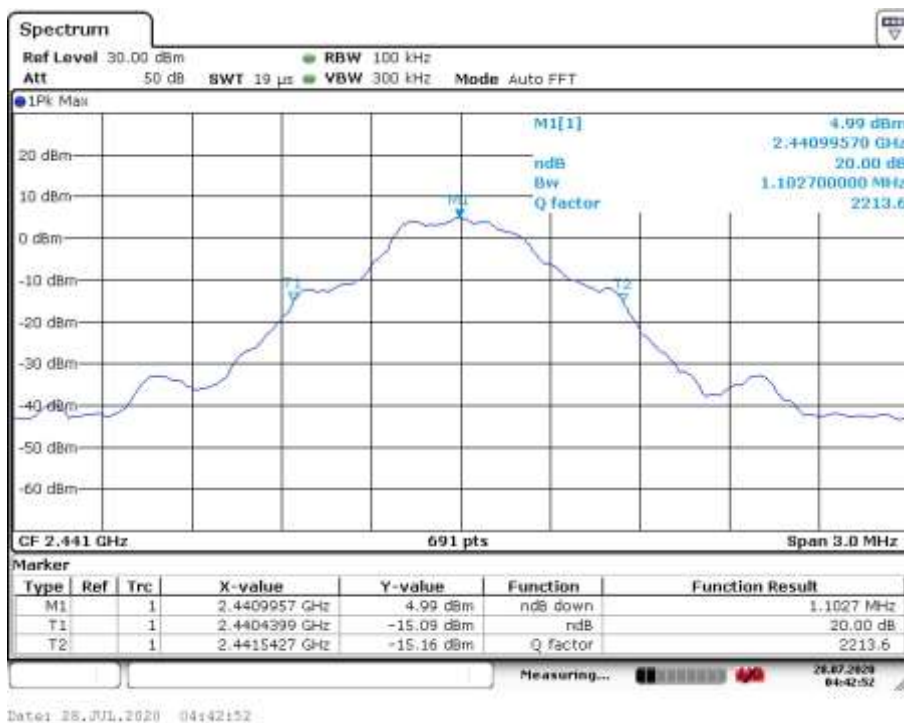


Modulation Standard: GFSK
Channel: 78

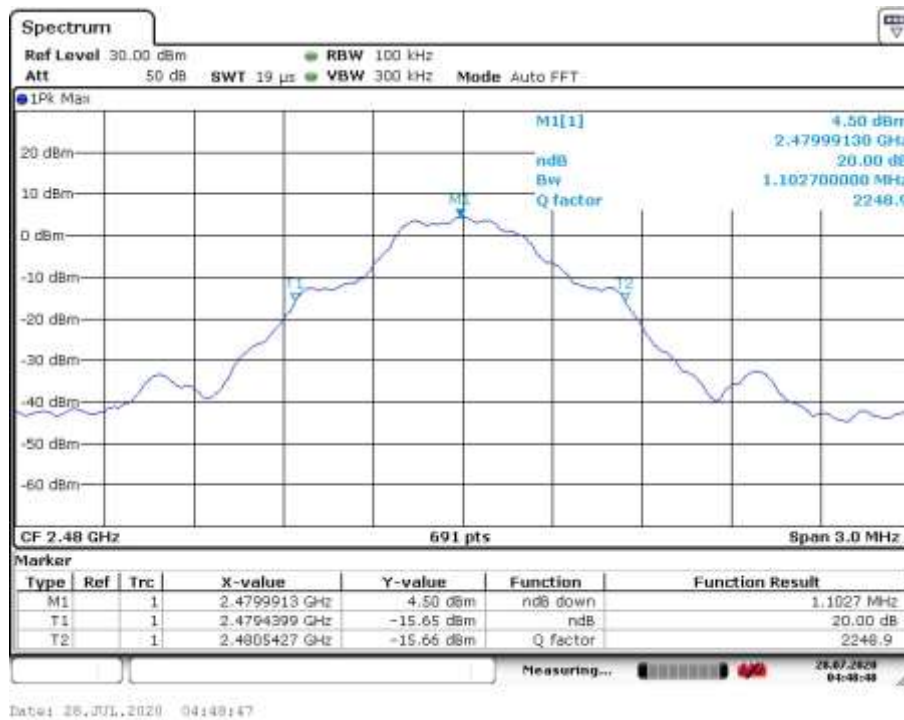


Modulation Standard: 8- DPSK
Channel: 0

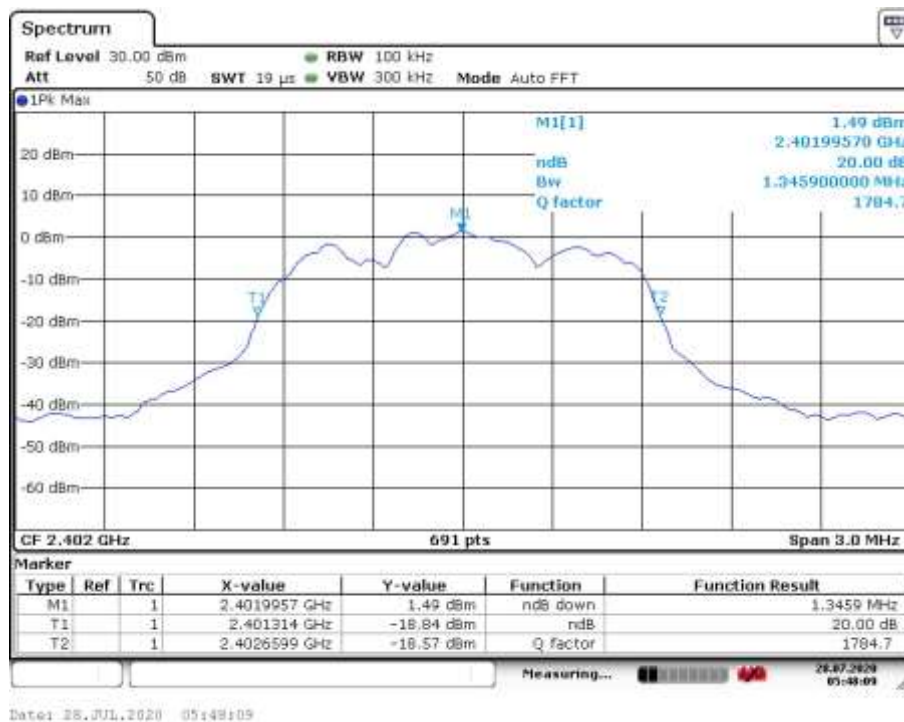

Modulation Standard: 8- DPSK
Channel: 39

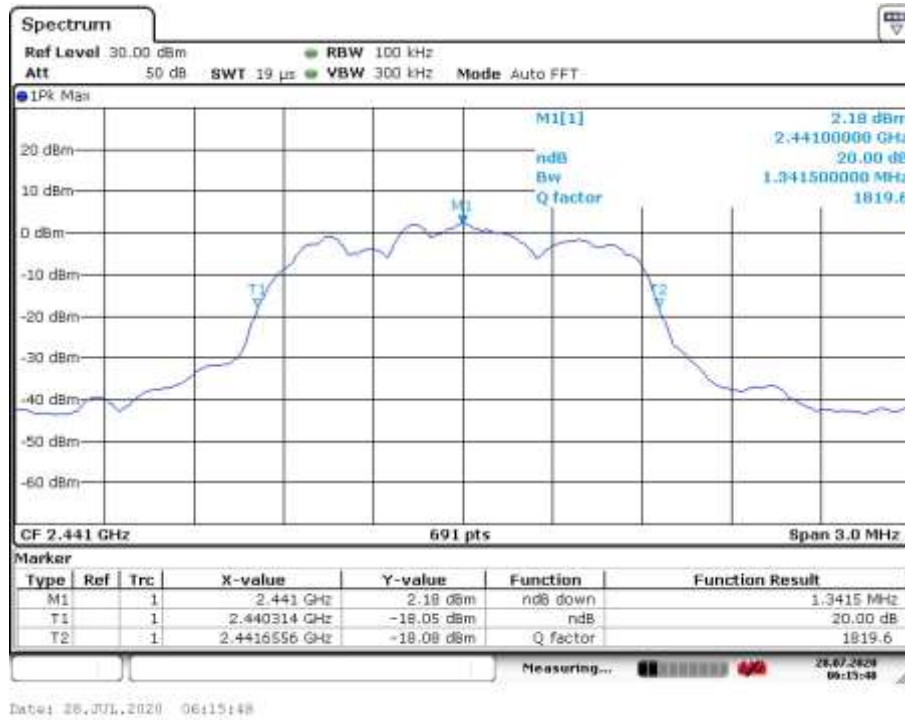

Modulation Standard: 8- DPSK
Channel: 78

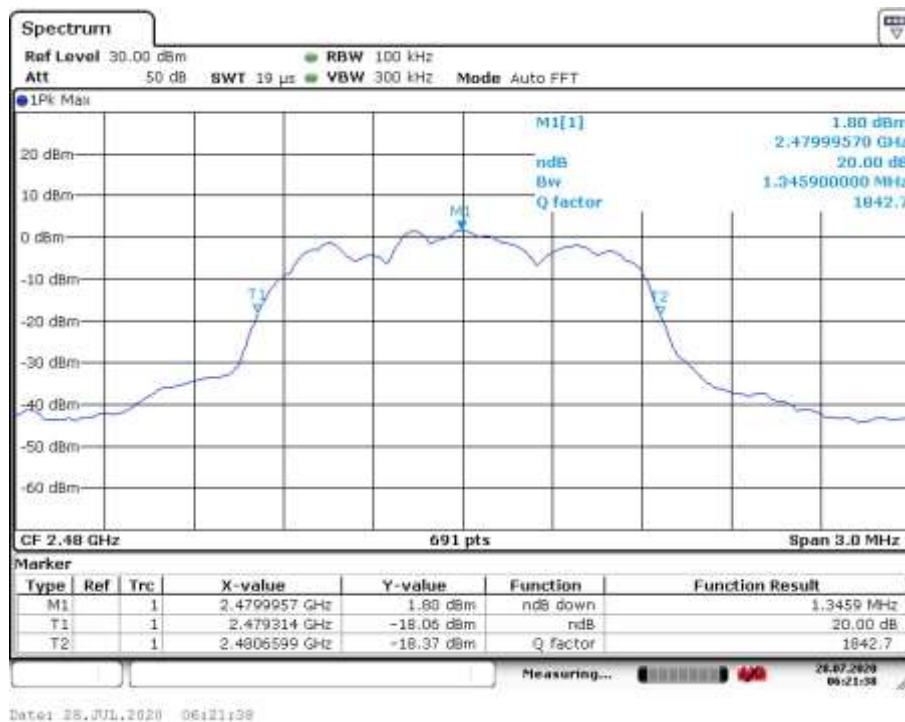

5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES / LIMIT


LP0002			
Section	Test Item	Frequency Range (MHz)	Result
3.10.1(6.1.1)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	1 MHz
VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 1 MHz, VBW=1 MHz, Sweep time = Auto.

5.1.2 TEST SETUP

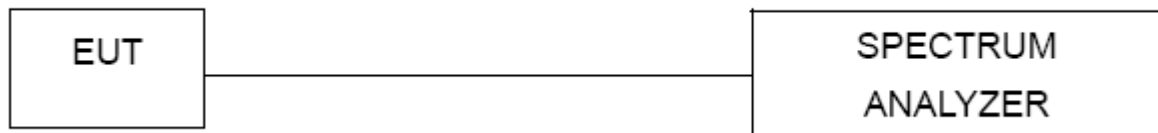


5.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.4 TEST RESULTS


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	Hopping Mode –1Mbps mode		
Test Date :	2020-07-28		

Number of Hopping Channel	79
---------------------------	----

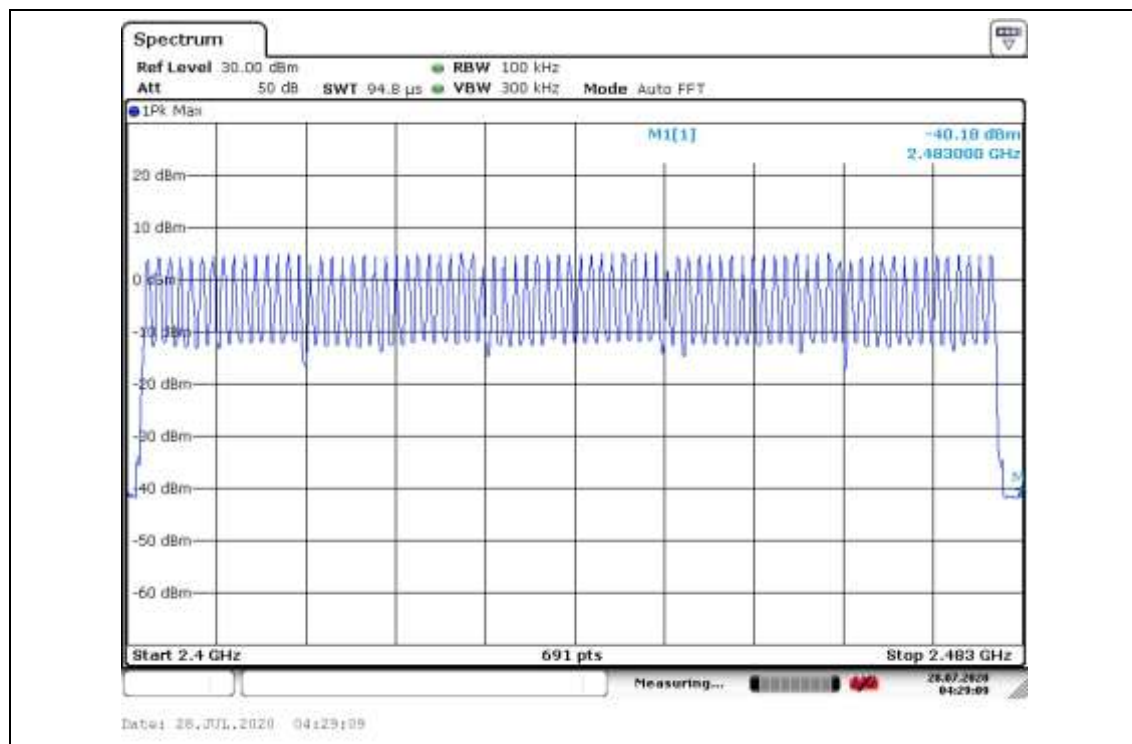

EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	Hopping Mode –3Mbps mode		
Test Date :	2020-07-28		

Number of Hopping Channel	79
---------------------------	----

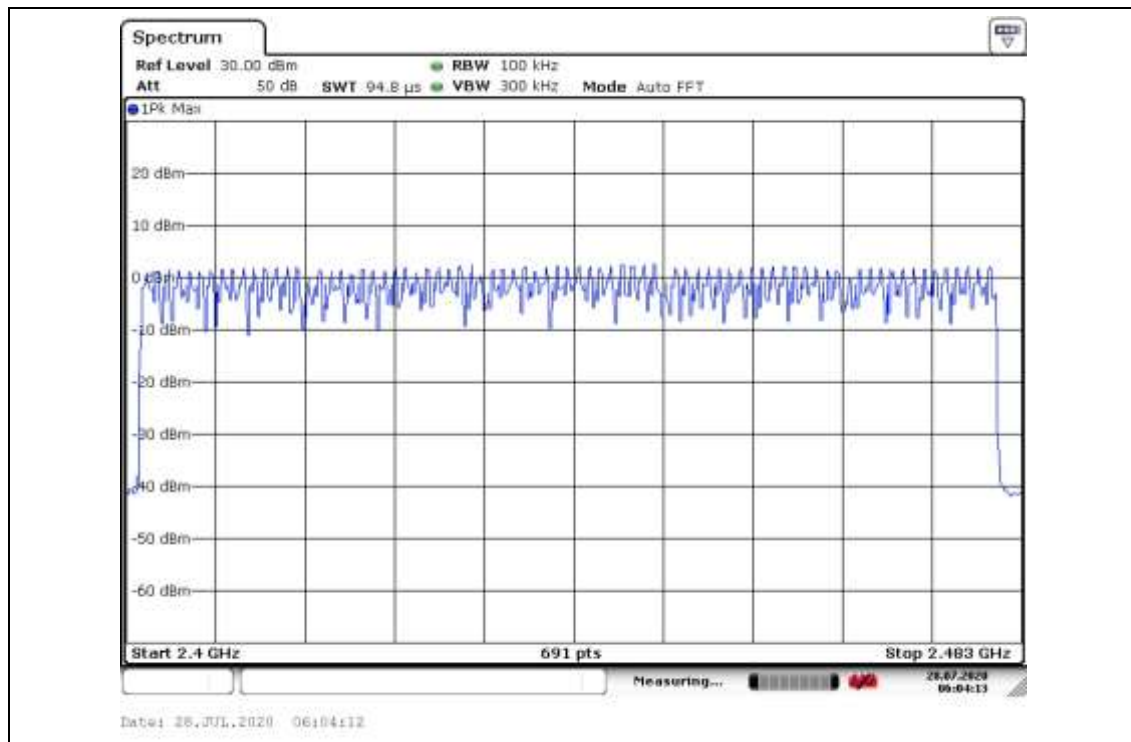

6. AVERAGE TIME OF OCCUPANCY


6.1 APPLIED PROCEDURES / LIMIT

LP0002				
Section	Test Item	Limit	Frequency Range (MHz)	Result
3.10.1(6.1.2)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

6.1.2 TEST SETUP

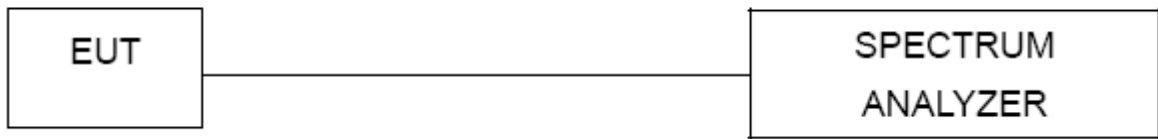


6.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


6.1.4 TEST RESULTS

EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	CH00-DH1/DH3/DH5 (1Mbps Mode)		
Test Date :	2020-07-28		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (ms)	Limits (s)
DH1	2402 MHz	0.394	126.144	0.4000
DH3	2402 MHz	1.646	263.392	0.4000
DH5	2402 MHz	2.899	309.1787	0.4000

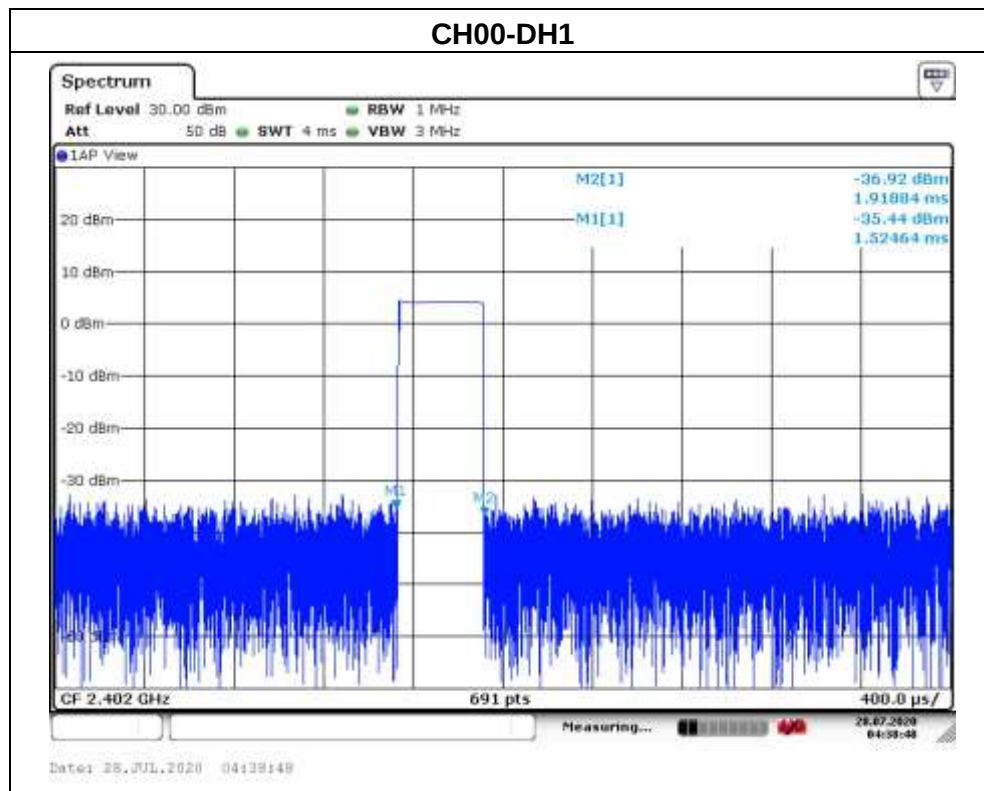

CH00-DH3

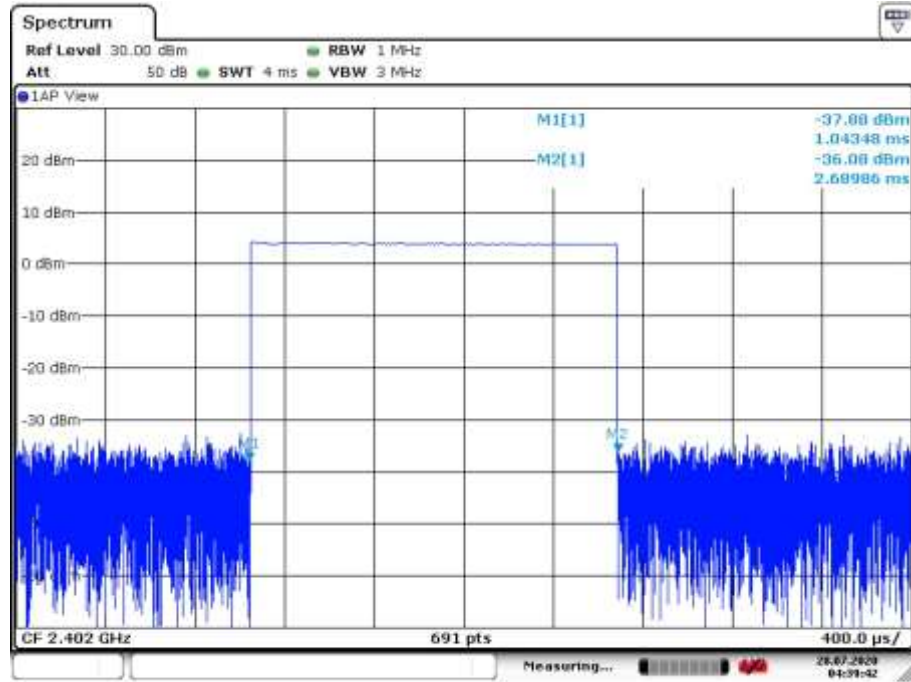


CH00-DH5

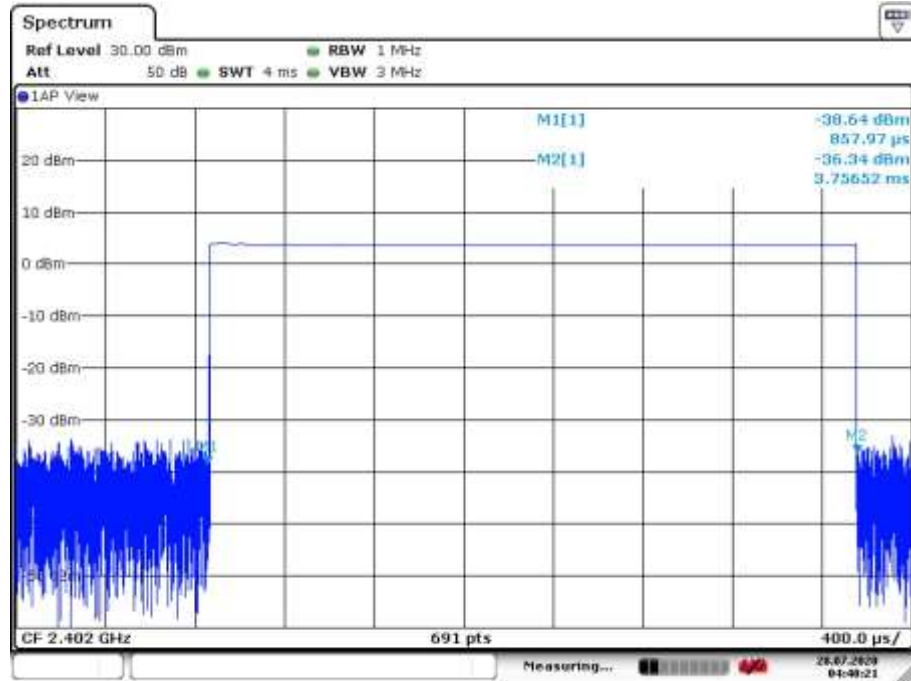


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	CH00-3DH1/3DH3/3DH5 (3Mbps Mode)		
Test Date :	2020-07-28		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (ms)	Limits (s)
3DH1	2402 MHz	0.406	129.856	0.4000
3DH3	2402 MHz	1.664	266.203	0.4000
3DH5	2402 MHz	2.910	310.416	0.4000

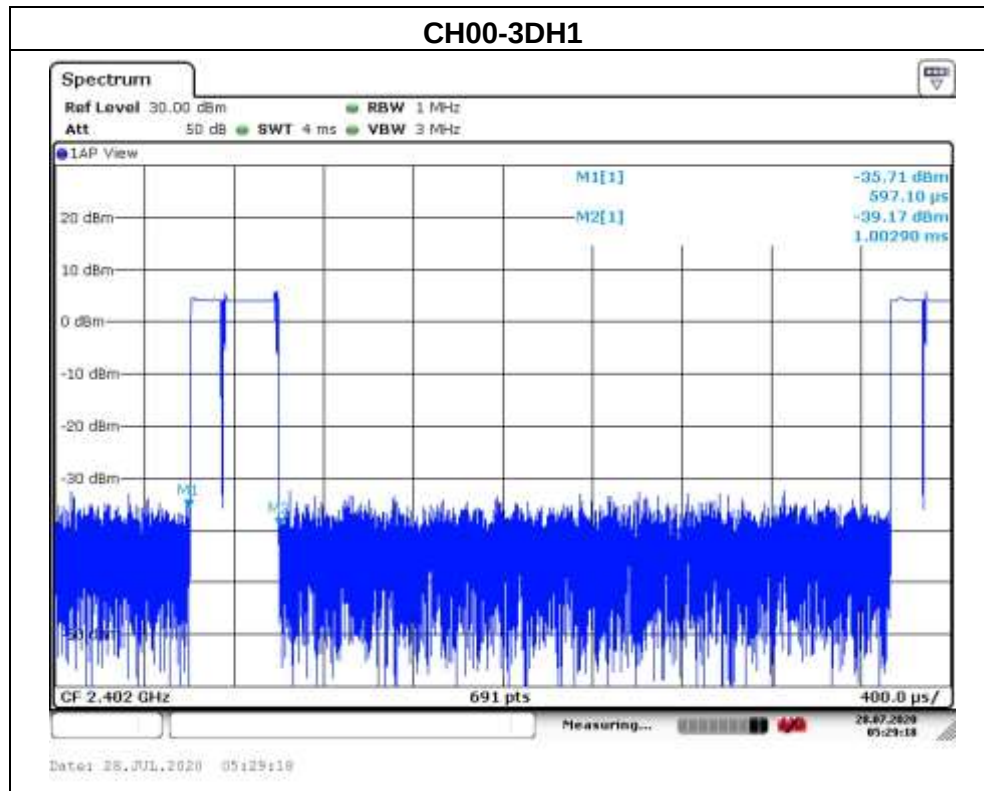


CH00-3DH3

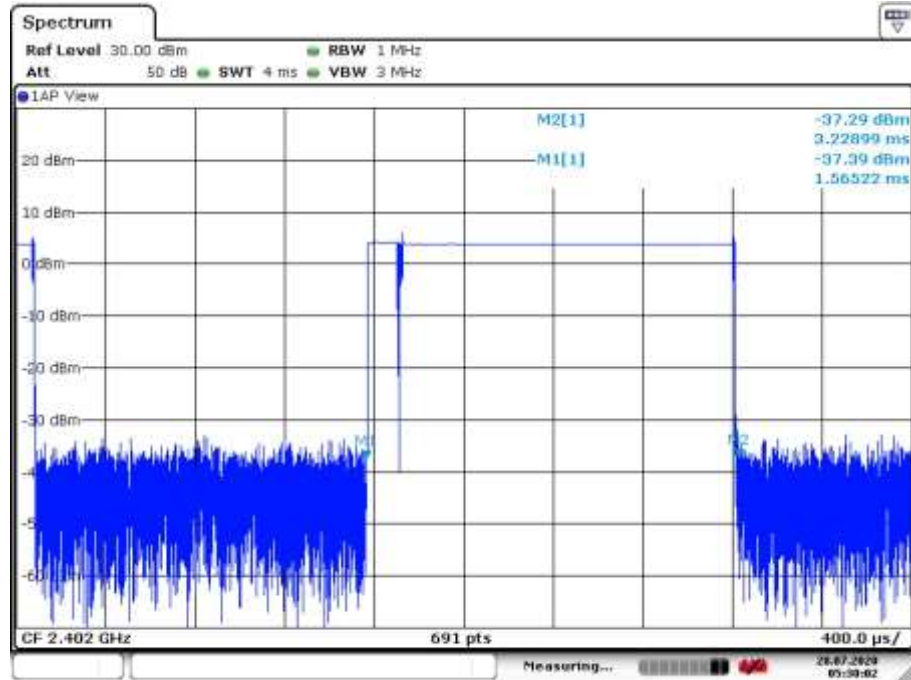

Date: 28.JUL.2020 05:30:01

CH00-3DH5

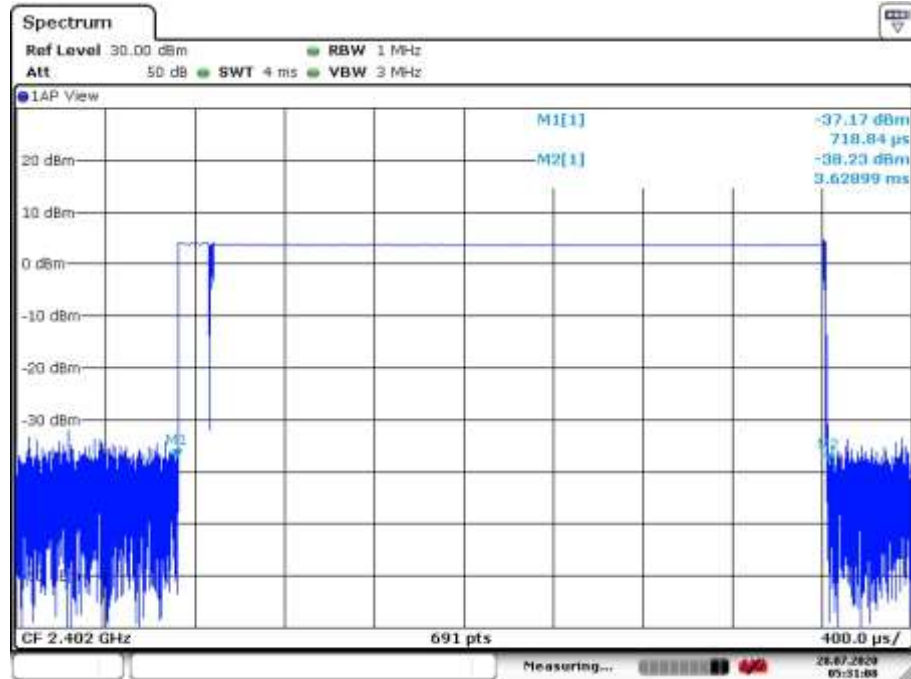

Date: 28.JUL.2020 05:31:08

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT


Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.1.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

7.1.2 TEST SETUP

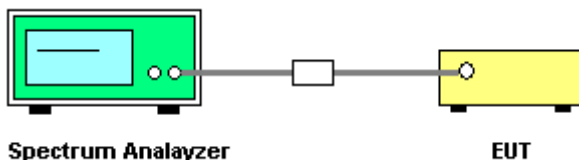

7.1.3 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.

7.1.4 TEST RESULTS


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	CH00 / CH39 /CH78 (1Mbps Mode)		
Test Date :	2019-08-30		

Frequency	Ch. Separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Result
2402 MHz	0.9943	0.7351	PASS
2441 MHz	0.9899	0.7351	PASS
2480 MHz	1.0506	0.7351	PASS


Ch. Separation >2/3(20dB bandwidth)

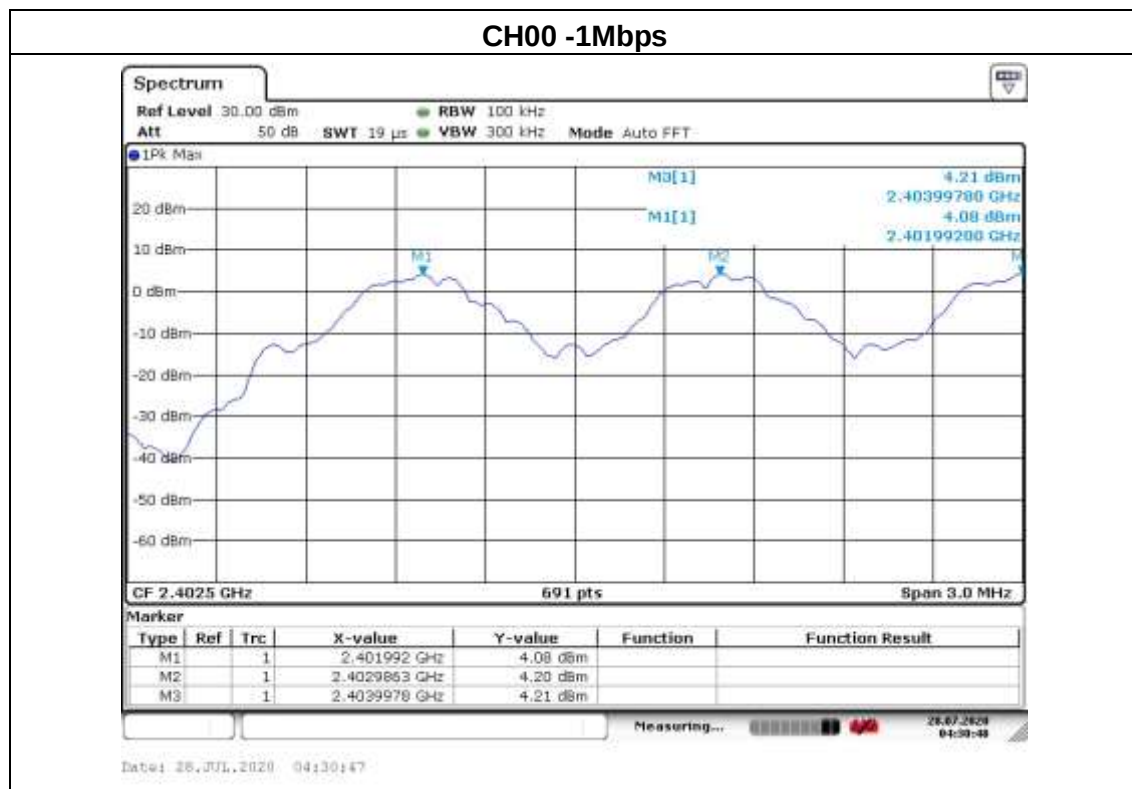

CH39 -1Mbps

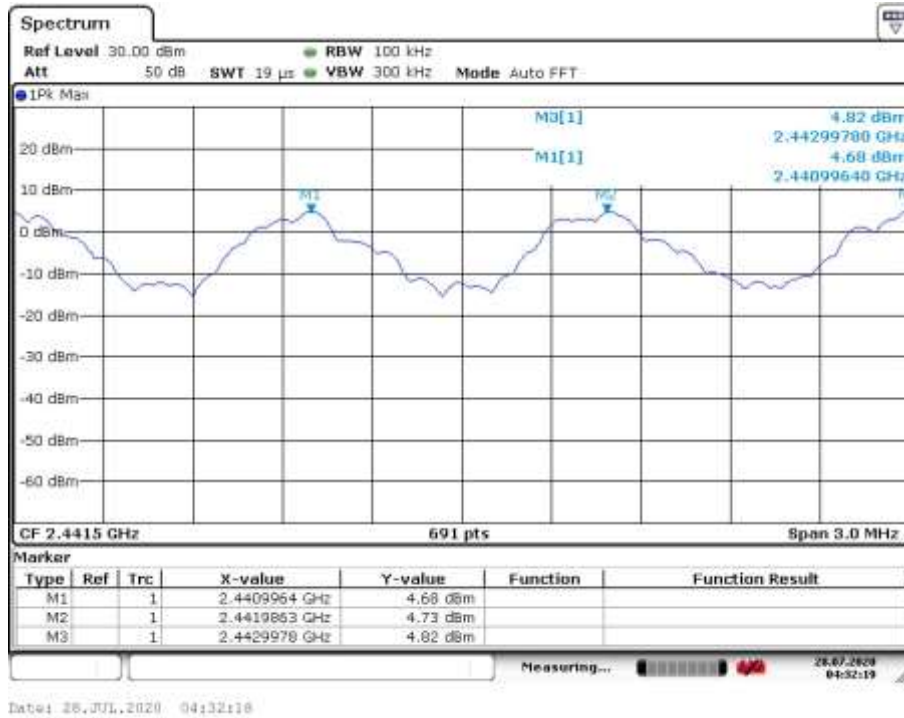


CH78 -1Mbps

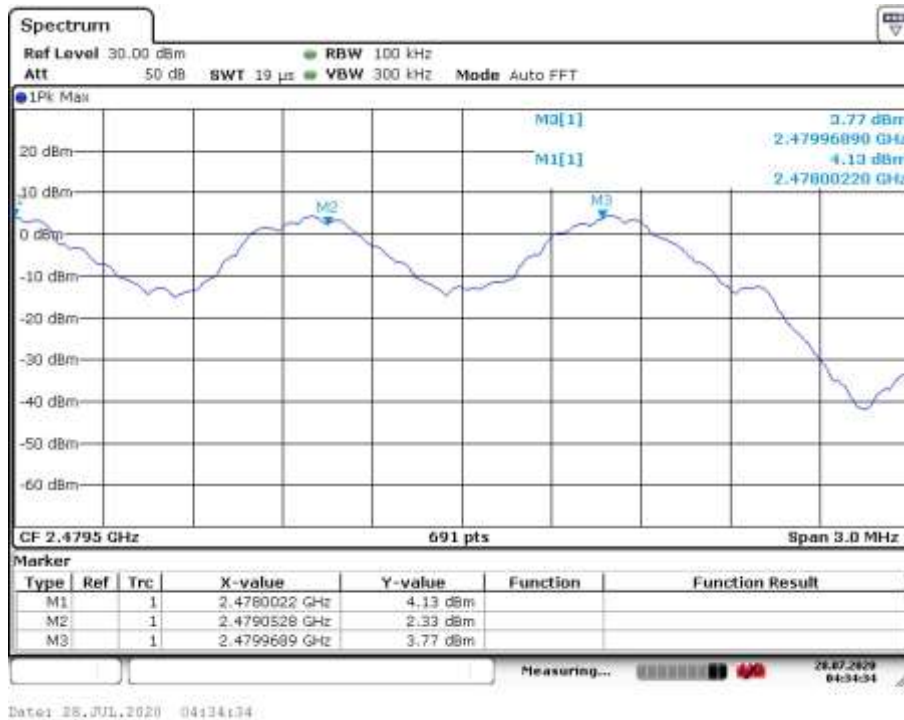


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	CH00 / CH39 /CH78 (3Mbps Mode)		

Frequency	Ch. Separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Result
2402 MHz	0.9725	0.8973	PASS
2441 MHz	0.9465	0.8943	PASS
2480 MHz	0.9899	0.8973	PASS


Ch. Separation >2/3(20dB bandwidth)

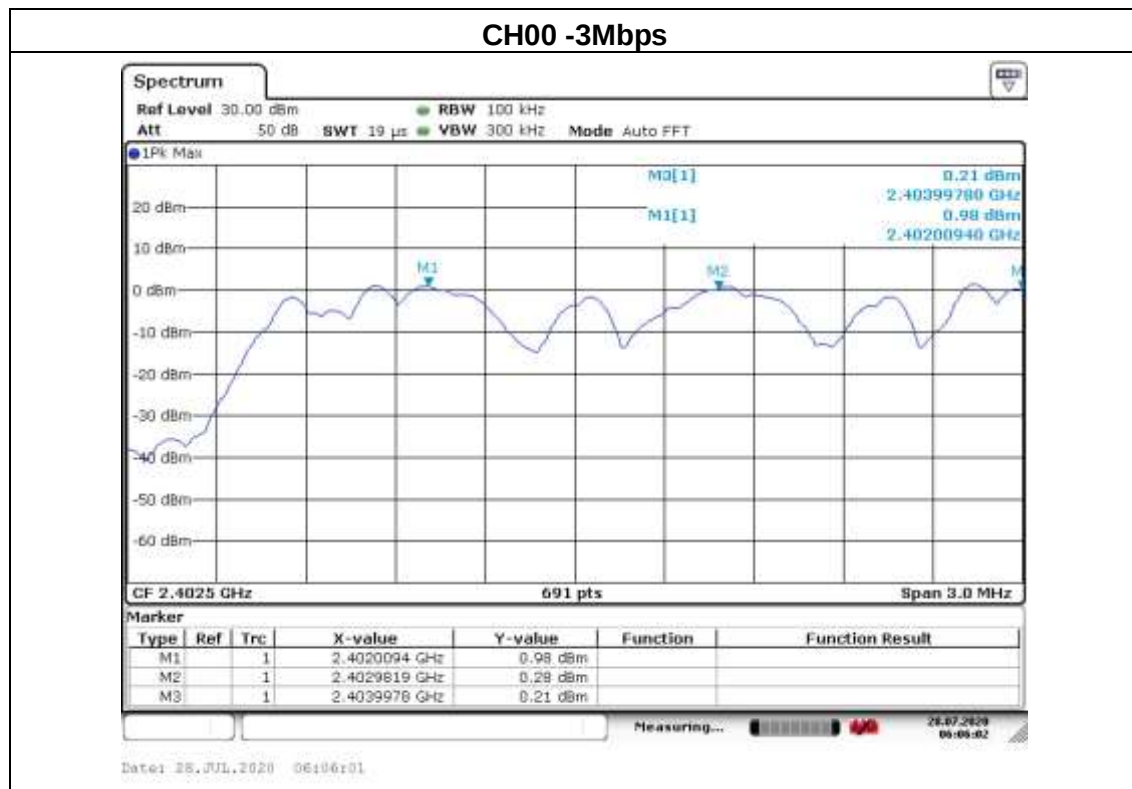

CH39 -3Mbps

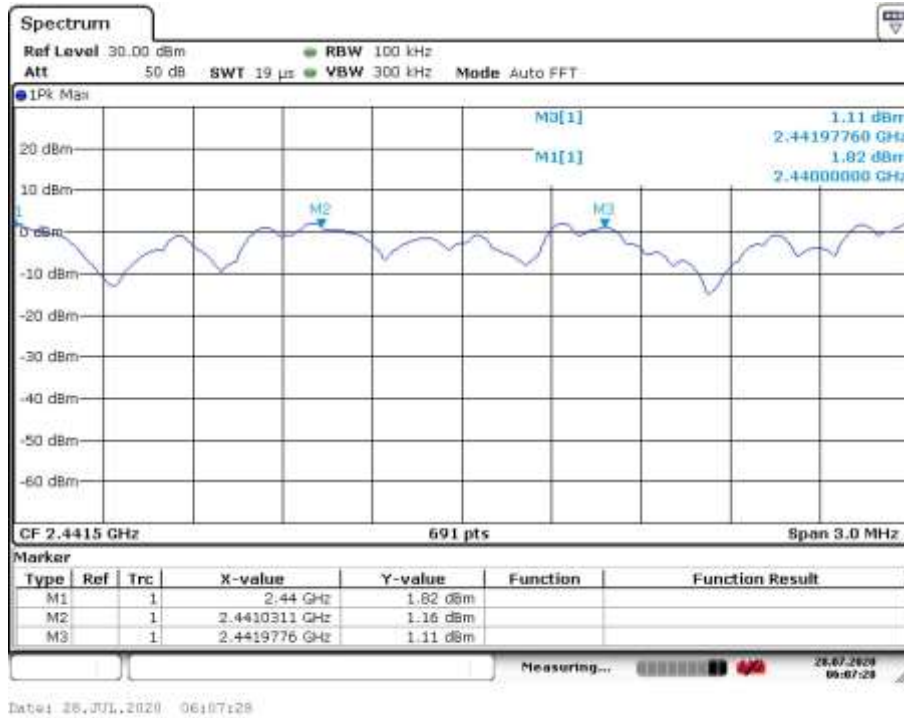

CH78 -3Mbps

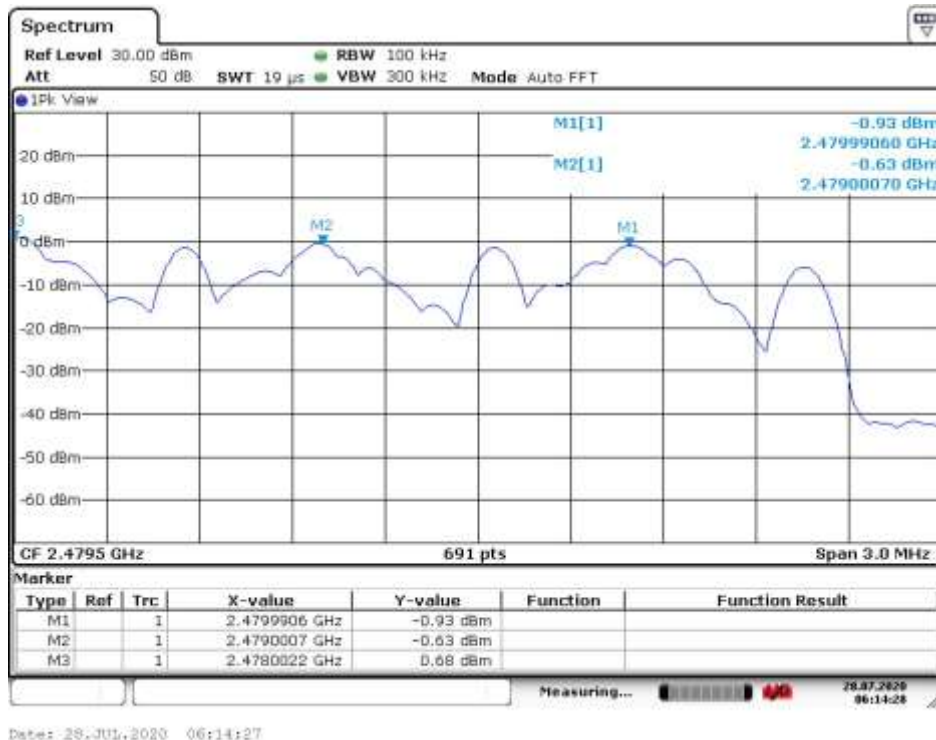

8. PEAK OUTPUT POWER TEST

8.1 APPLIED PROCEDURES / LIMIT

LP0002				
Section	Test Item	Limit	Frequency Range (MHz)	Result
3.10.1(2)	Peak Output Power	0.125 watt or 21dBm	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 3MHz, VBW= 3MHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP




8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 TEST RESULTS

EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	CH00/ CH39 /CH78 (1Mbps Mode)		
Test Date :	2020-07-28		

Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
2402	4.43	30	1
2441	5.00	30	1
2480	4.60	30	1

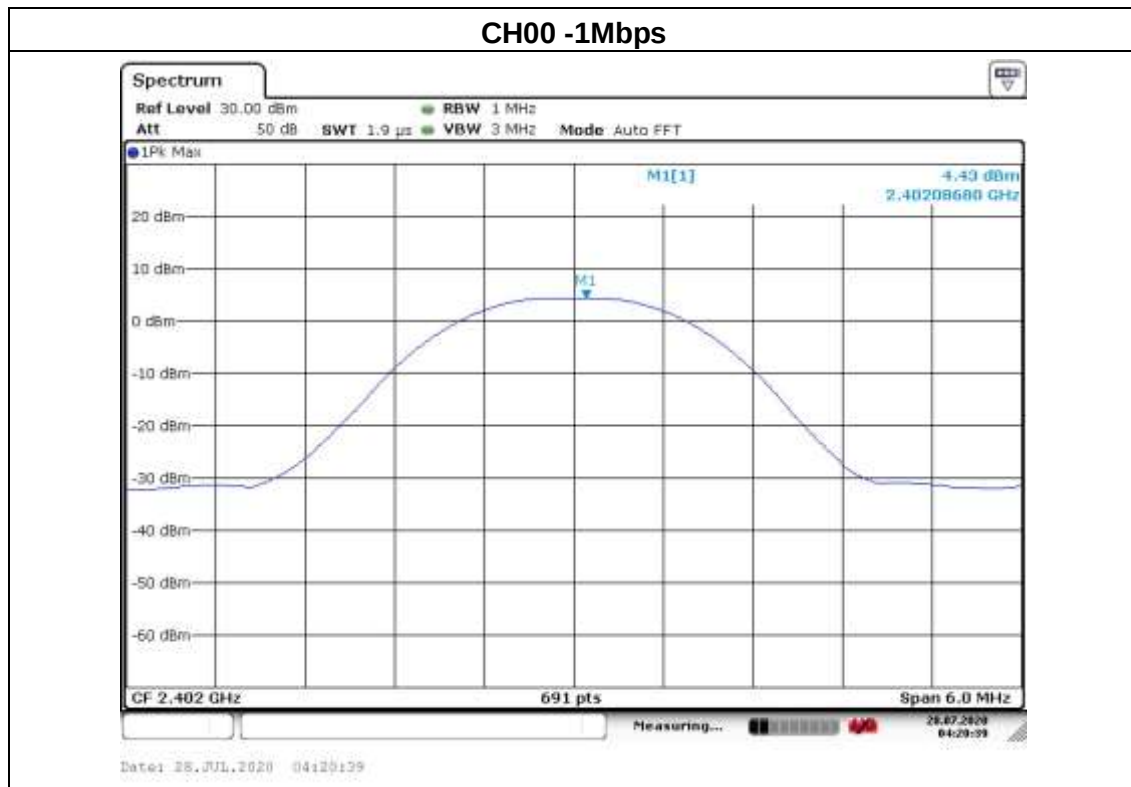

CH39 -1Mbps




CH78 -1Mbps




EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	CH00/ CH39 /CH78 (3Mbps Mode)		
Test Date :	2020-07-28		

Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
2402	2.93	30	1
2441	3.41	30	1
2480	2.81	30	1

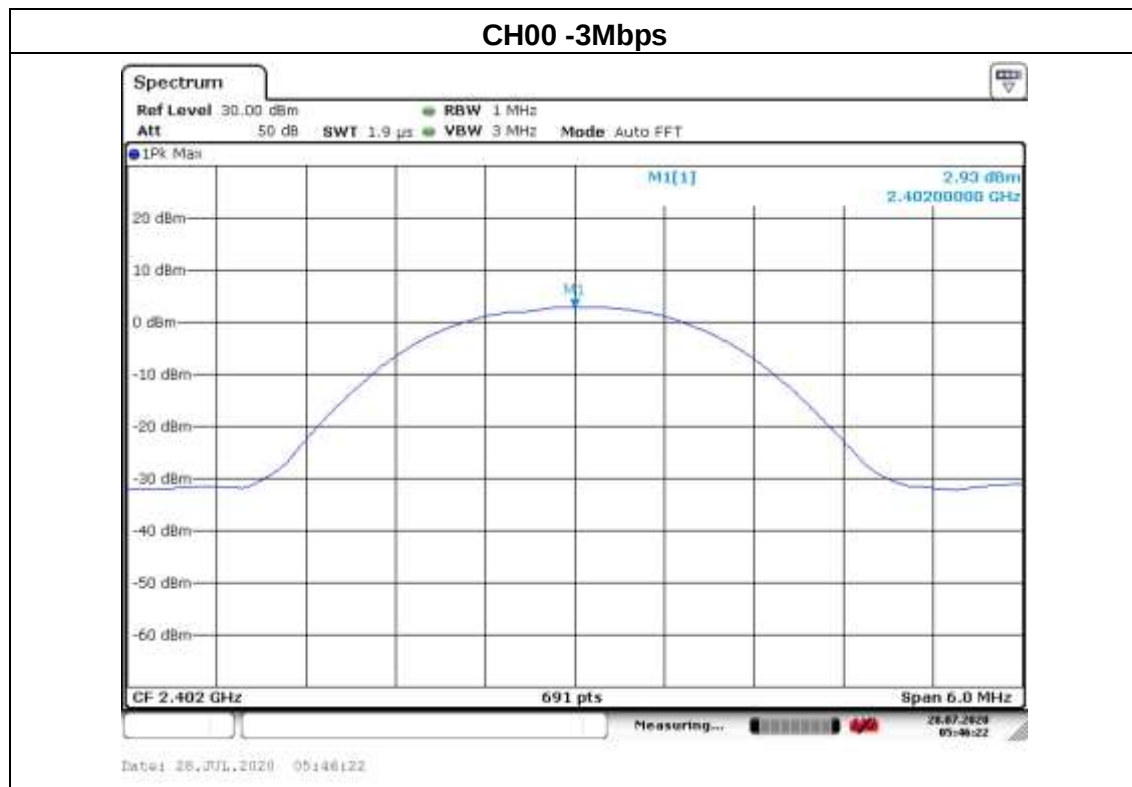

CH39 -3Mbps

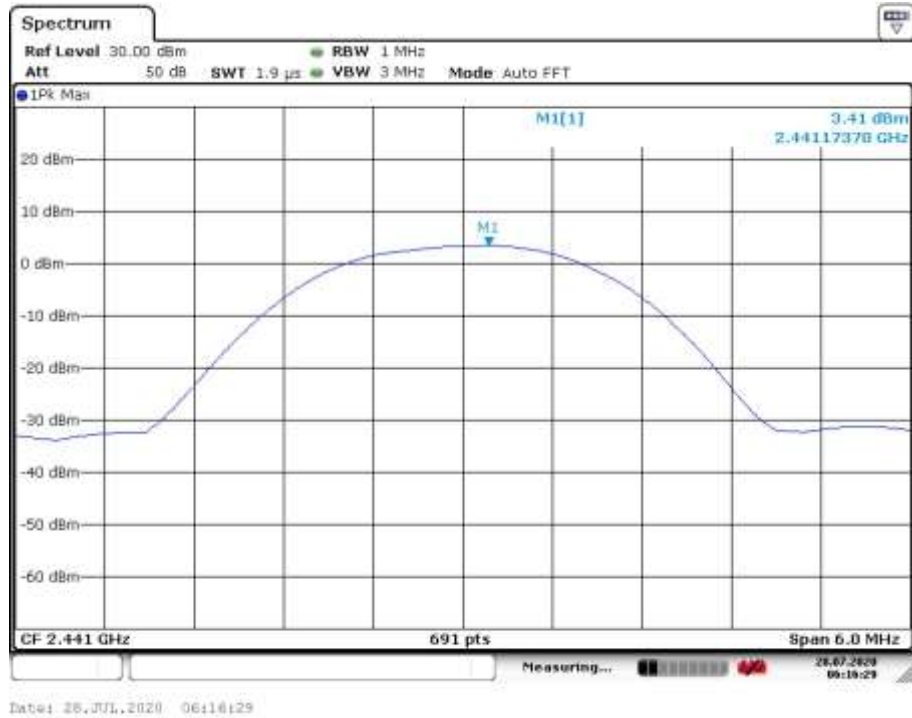

CH78 -3Mbps



9. ANTENNA CONDUCTED SPURIOUS EMISSION

9.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in Section 2.8.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100 KHz /100 KHz for Peak

9.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

9.1.2 TEST SETUP

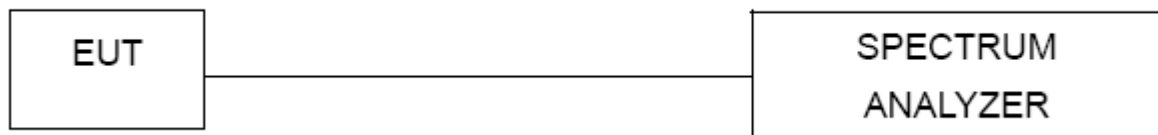

9.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.1.4 TEST RESULTS


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	CH00 / CH78 (1Mbps)		
Test Date :	2020-07-28		

in any 100kHz bandwidth outside the low frequency band	in any 100 kHz bandwidth outside the high frequency band
Pass	Pass
Result	
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.	


Remark :

- (1) Hopping enabled and disabled have evaluated, and the worst data was reported

CH00 (Lower) Data rate 1Mbps

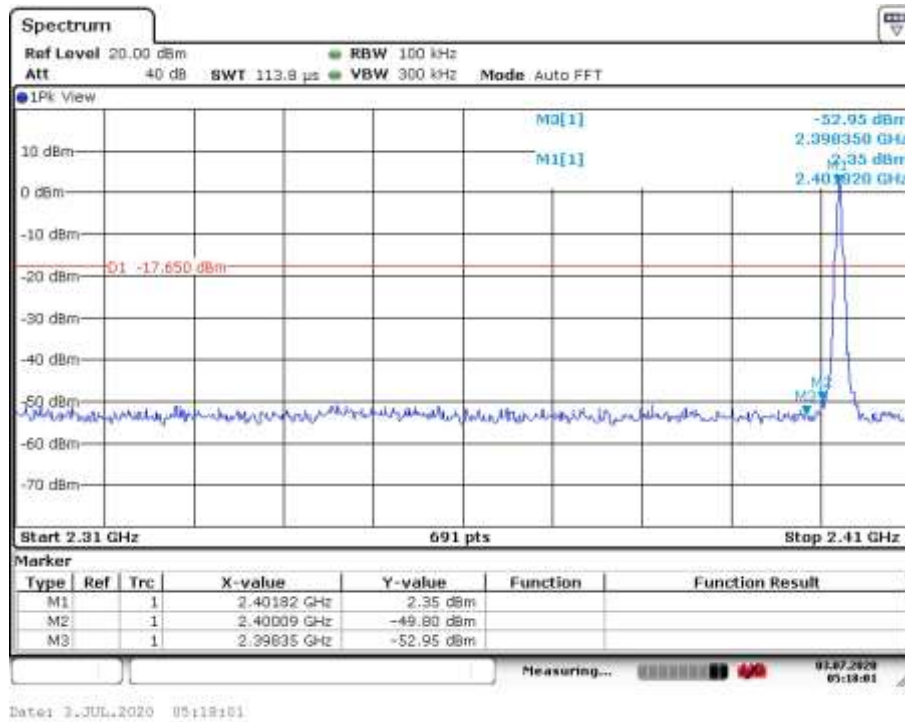

CH 78 (Upper) Data rate 1Mbps

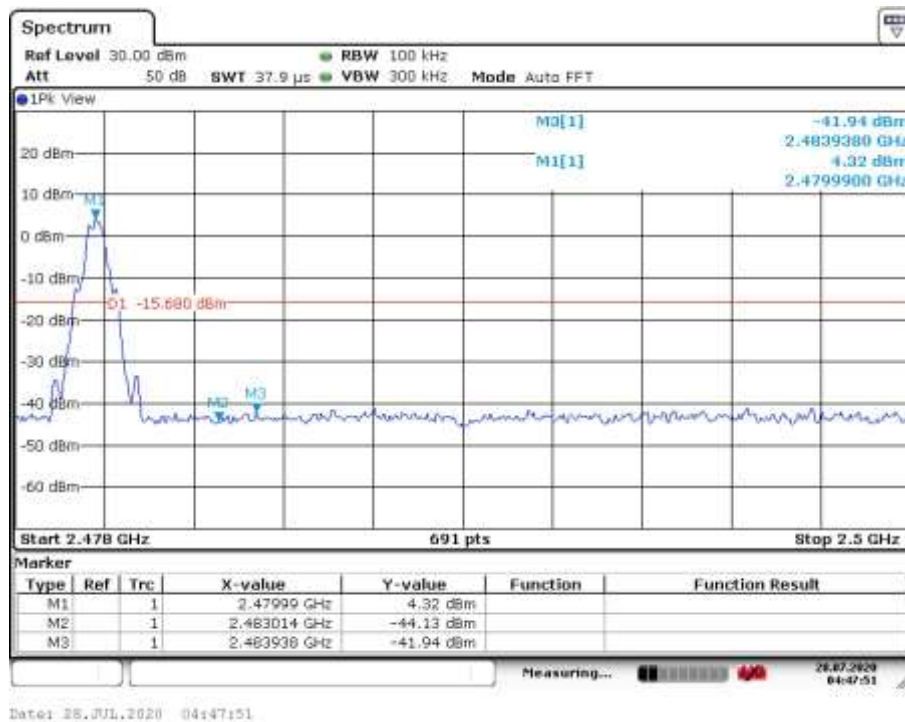


EUT :	CREATIVE OUTLIER GOLD V2	Model Name :	EF0910
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	CH00 / CH78 (3Mbps)		
Test Date :	2020-07-30		

in any 100kHz bandwidth outside the low frequency band	in any 100 kHz bandwidth outside the high frequency band
Pass	Pass
Result	
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.	


Remark :

- (1) Hopping enabled and disabled have evaluated, and the worst data was reported

CH00 (Lower) Data rate 3Mbps

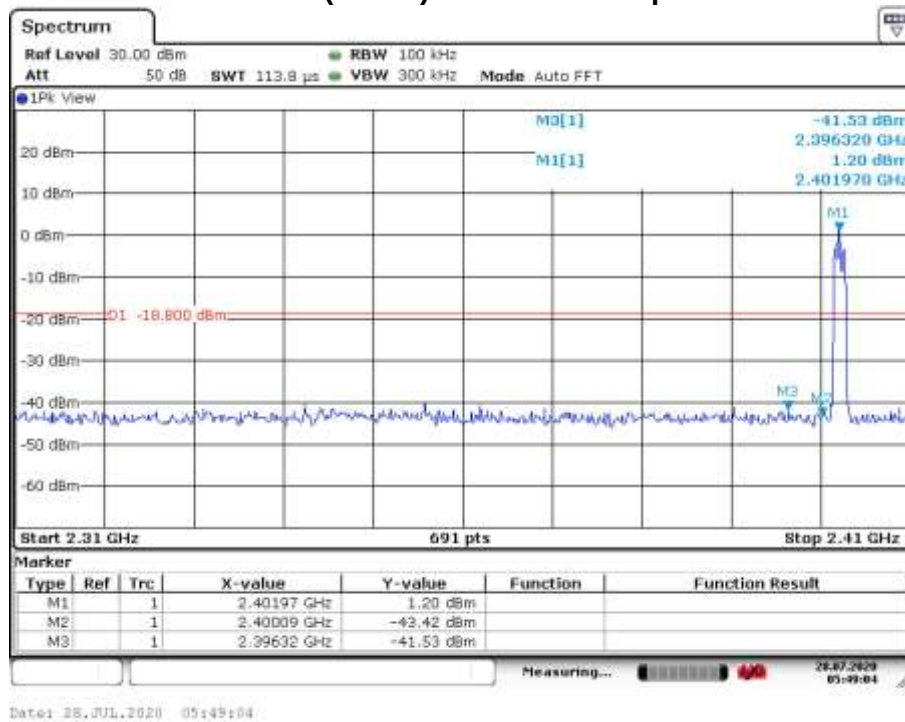

CH 78 (Upper) Data rate 3Mbps

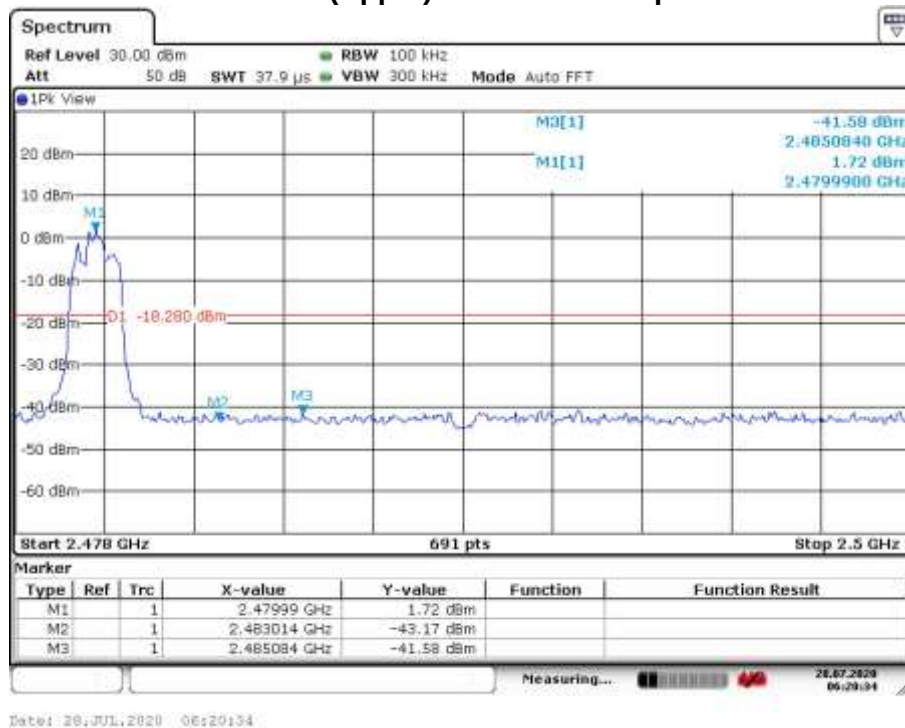

10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

3.10.3.1.1 requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

10.2 EUT ANTENNA


The antenna is a LDS Antenna and no consideration of replacement. Antenna max gain is -2.69dBi from 2.4GHz to 2.5GHz.

11. EUT TEST PHOTO**Conducted Measurement Photos**

**Radiated Measurement Photos
30MHz-1GHz**



Normal charging mode

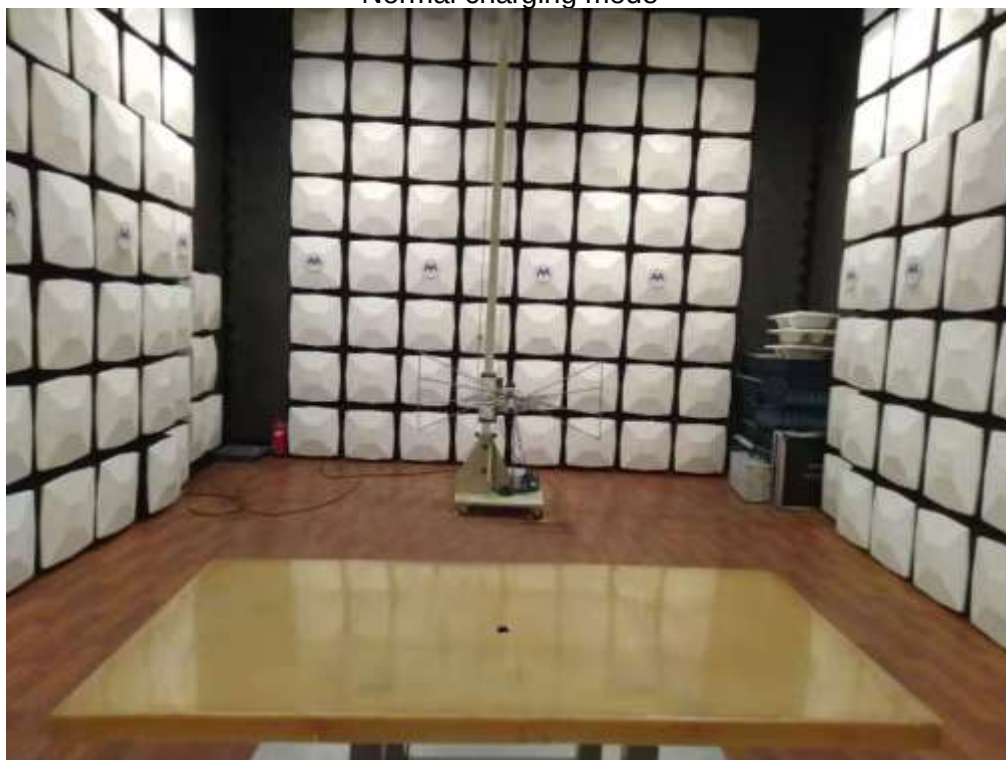

**Radiated Measurement Photos
Above 1GHz**



****END OF REPORT****