


Site: AC1	Time: 2018/06/27 - 00:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5825MHz	

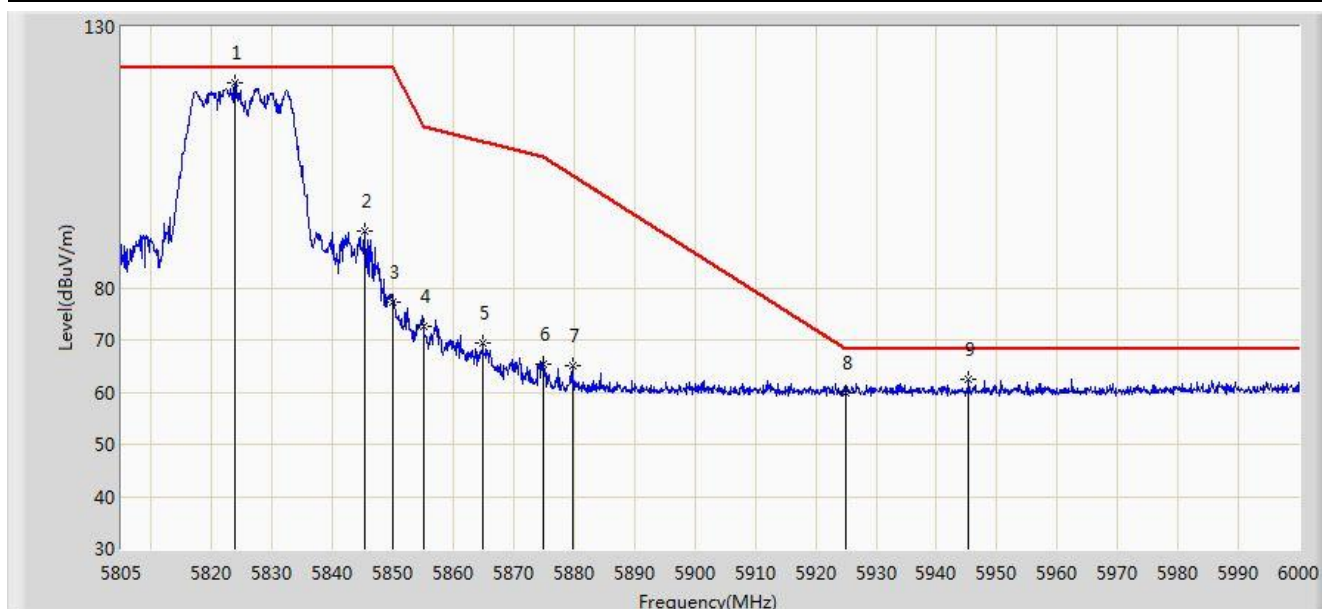


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.720	119.406	113.826	N/A	N/A	5.580	PK
2			5845.365	90.894	85.188	-31.306	122.200	5.707	PK
3			5850.000	77.373	71.647	-44.827	122.200	5.726	PK
4			5855.000	72.743	66.997	-38.057	110.800	5.746	PK
5			5864.865	69.329	63.544	-38.706	108.035	5.785	PK
6			5875.000	65.415	59.595	-39.785	105.200	5.820	PK
7			5879.783	65.123	59.287	-36.524	101.647	5.837	PK
8			5925.000	59.821	53.855	-8.379	68.200	5.967	PK
9			5945.303	62.419	56.403	-5.781	68.200	6.016	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5190MHz	

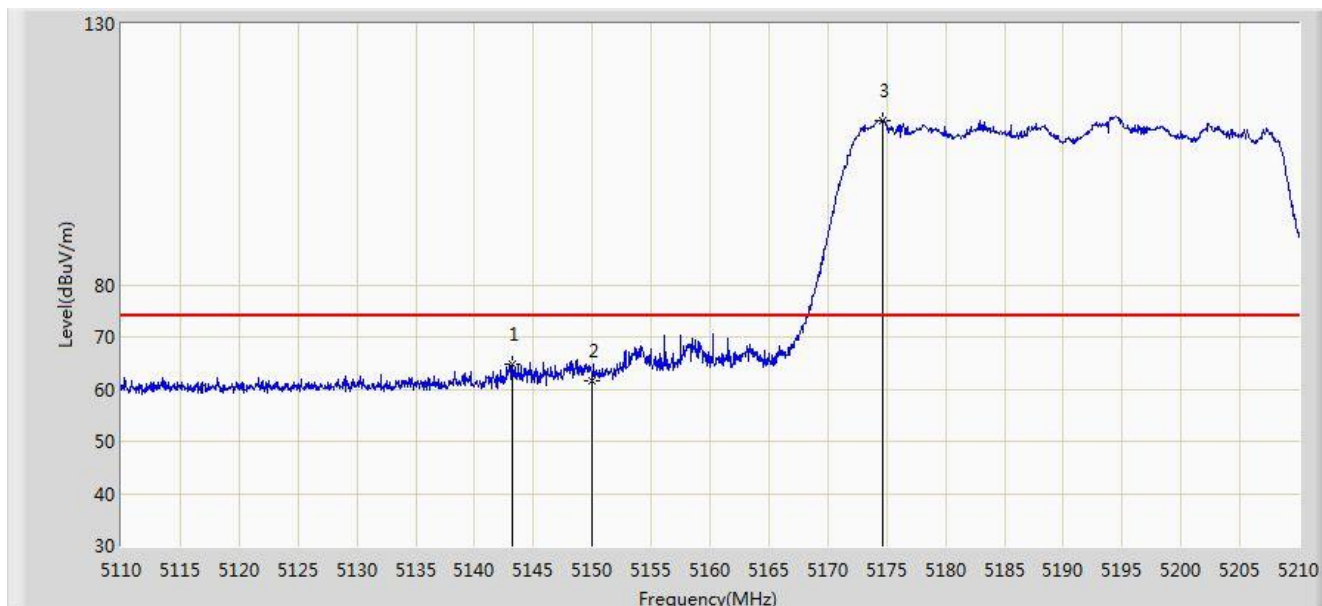


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.200	64.664	60.488	-9.336	74.000	4.176	PK
2			5150.000	61.665	57.496	-12.335	74.000	4.170	PK
3		*	5174.650	111.433	107.345	N/A	N/A	4.088	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5190MHz	

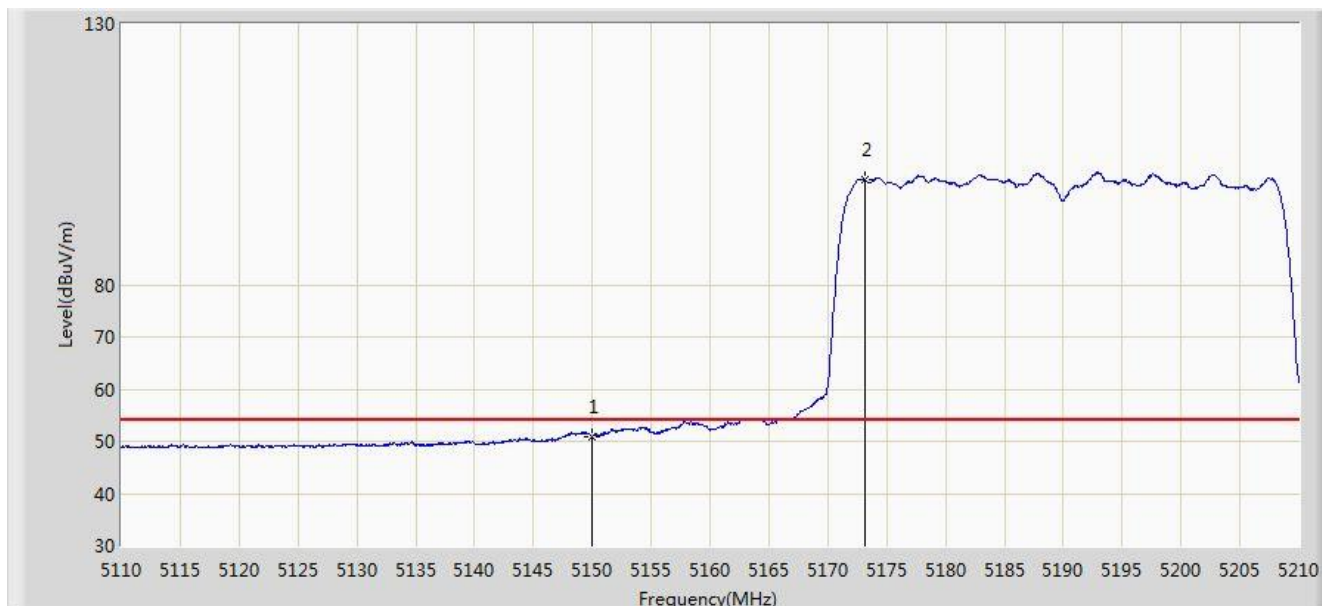


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.865	46.696	-3.135	54.000	4.170	AV
2		*	5173.100	100.072	95.979	N/A	N/A	4.093	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5190MHz	

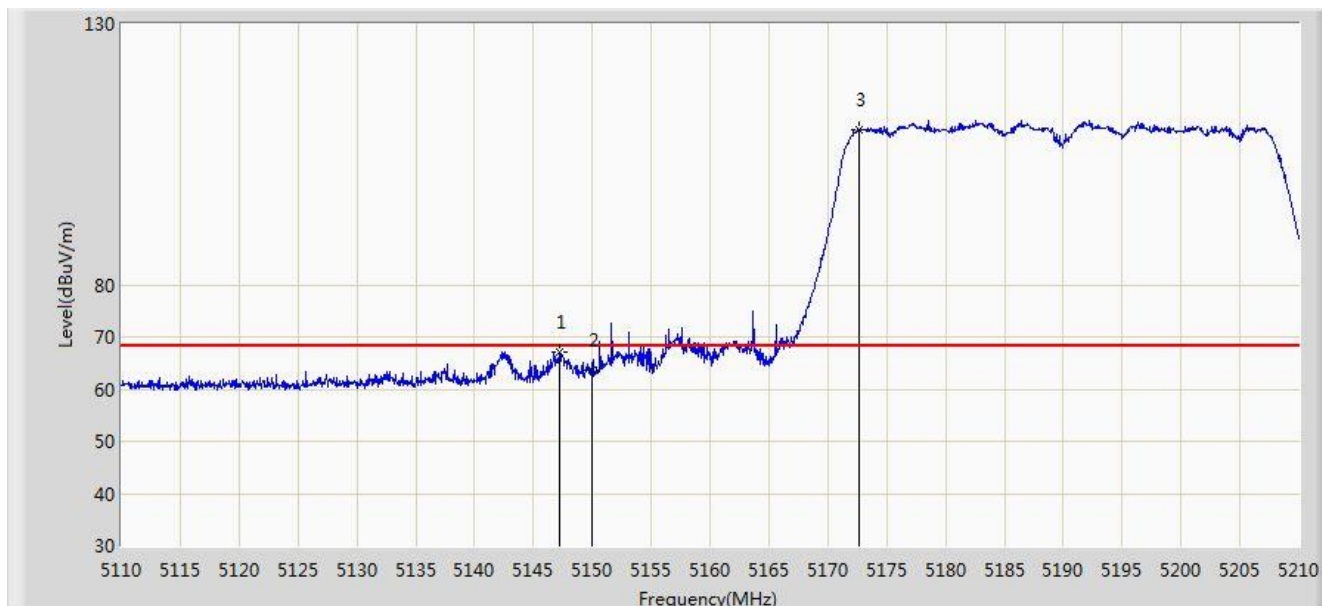


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.200	67.016	62.840	-1.184	68.200	4.176	PK
2			5150.000	63.693	59.524	-4.507	68.200	4.170	PK
3		*	5172.600	109.698	105.603	N/A	N/A	4.095	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5190MHz	

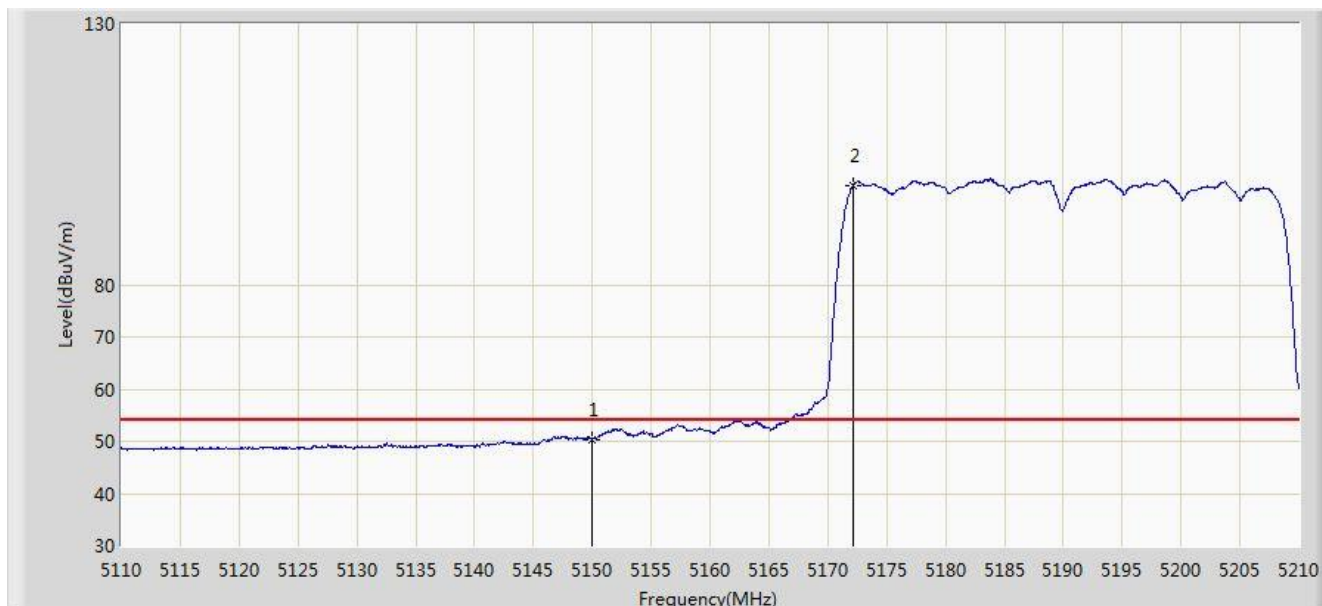


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.420	46.251	-3.580	54.000	4.170	AV
2		*	5172.100	98.867	94.770	N/A	N/A	4.097	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

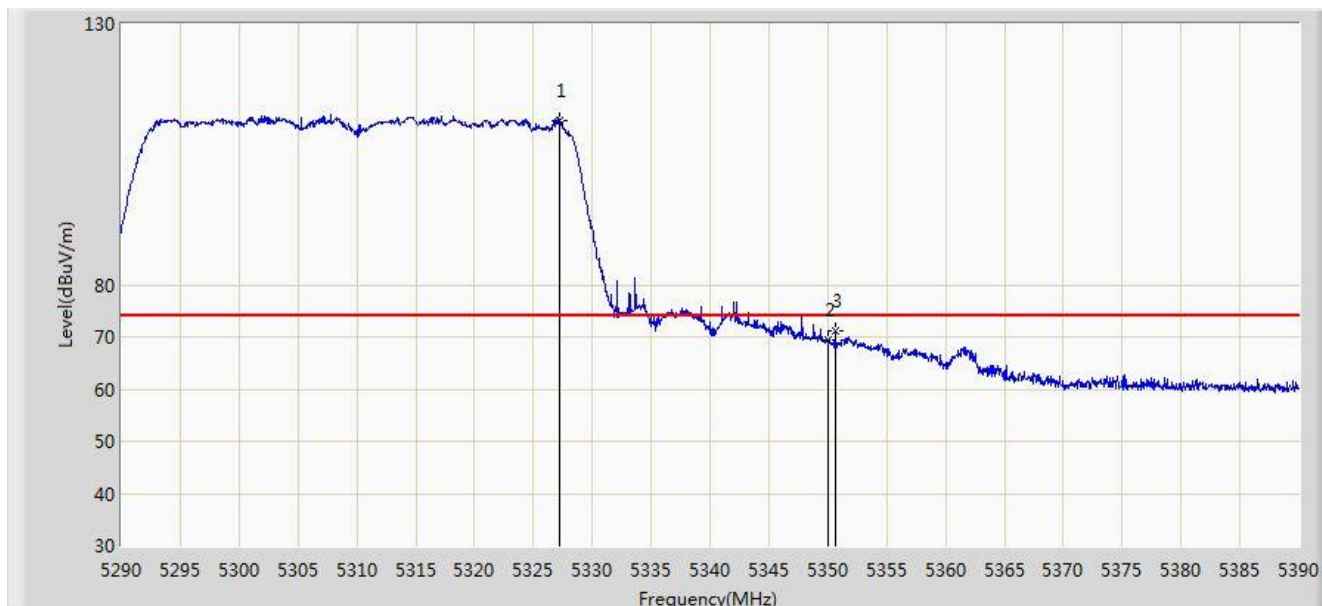


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.250	111.529	107.667	N/A	N/A	3.862	PK
2			5350.000	69.411	65.506	-4.589	74.000	3.904	PK
3			5350.600	71.072	67.166	-2.928	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

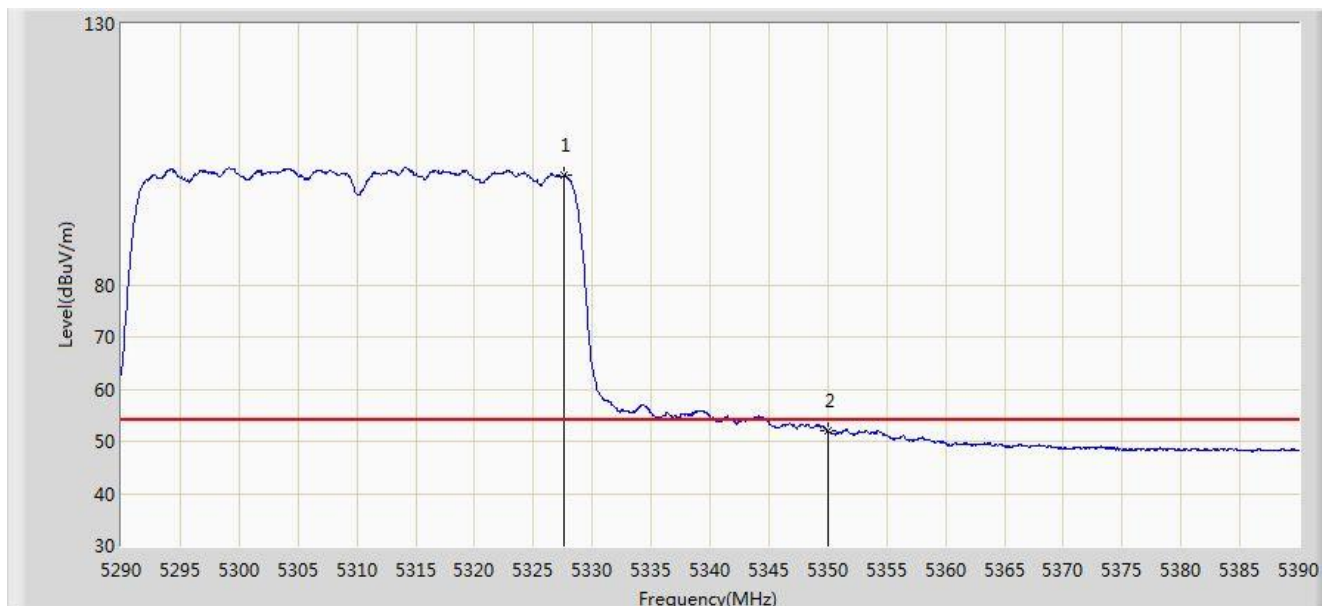


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.600	101.014	97.151	N/A	N/A	3.864	AV
2			5350.000	52.060	48.155	-1.940	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

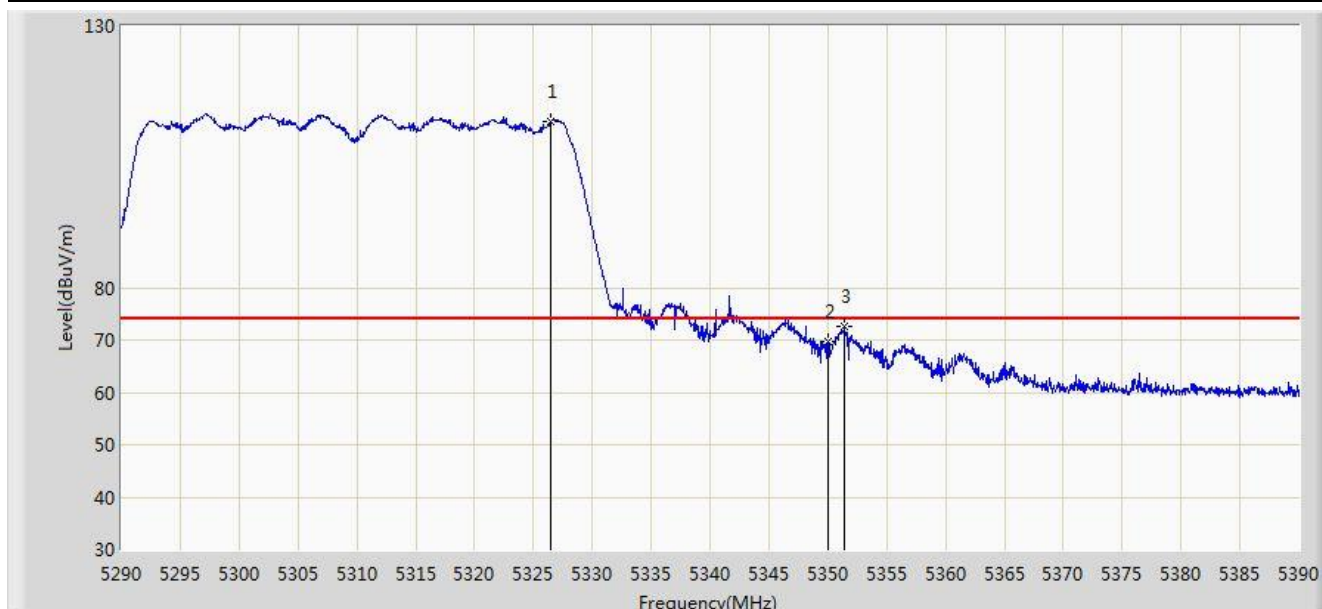


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.500	111.684	107.823	N/A	N/A	3.862	PK
2			5350.000	69.784	65.879	-4.216	74.000	3.904	PK
3			5351.400	72.471	68.564	-1.529	74.000	3.907	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

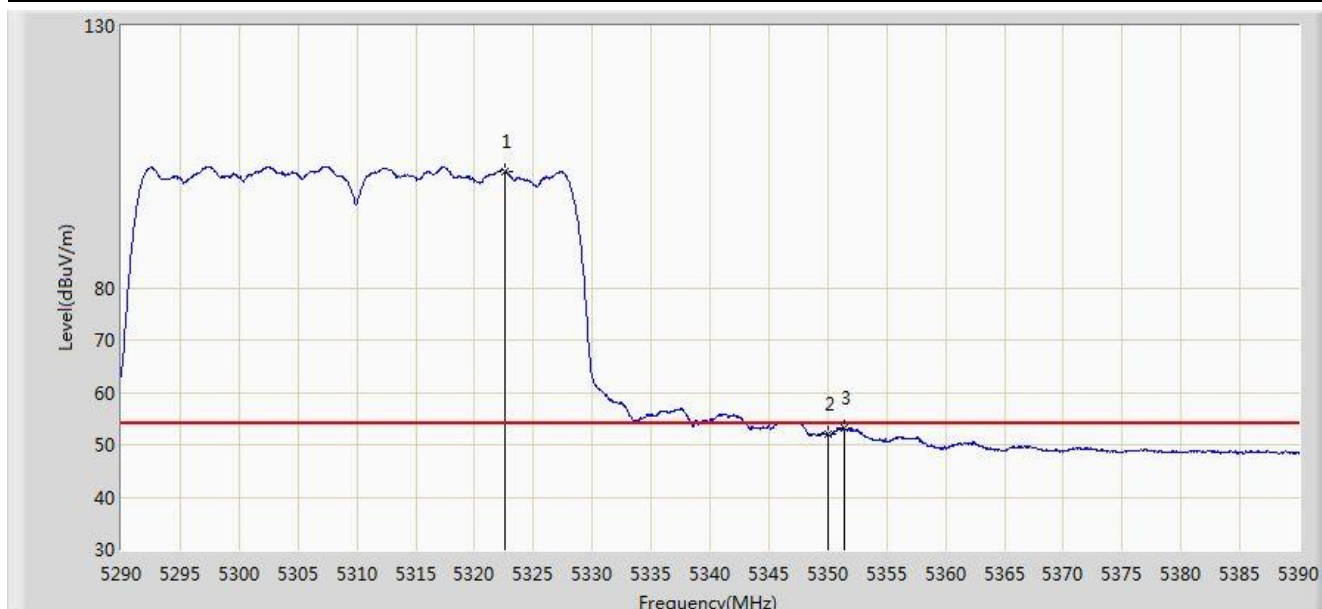


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.600	102.241	98.387	N/A	N/A	3.853	AV
2			5350.000	51.903	47.998	-2.097	54.000	3.904	AV
3			5351.400	53.257	49.350	-0.743	54.000	3.907	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

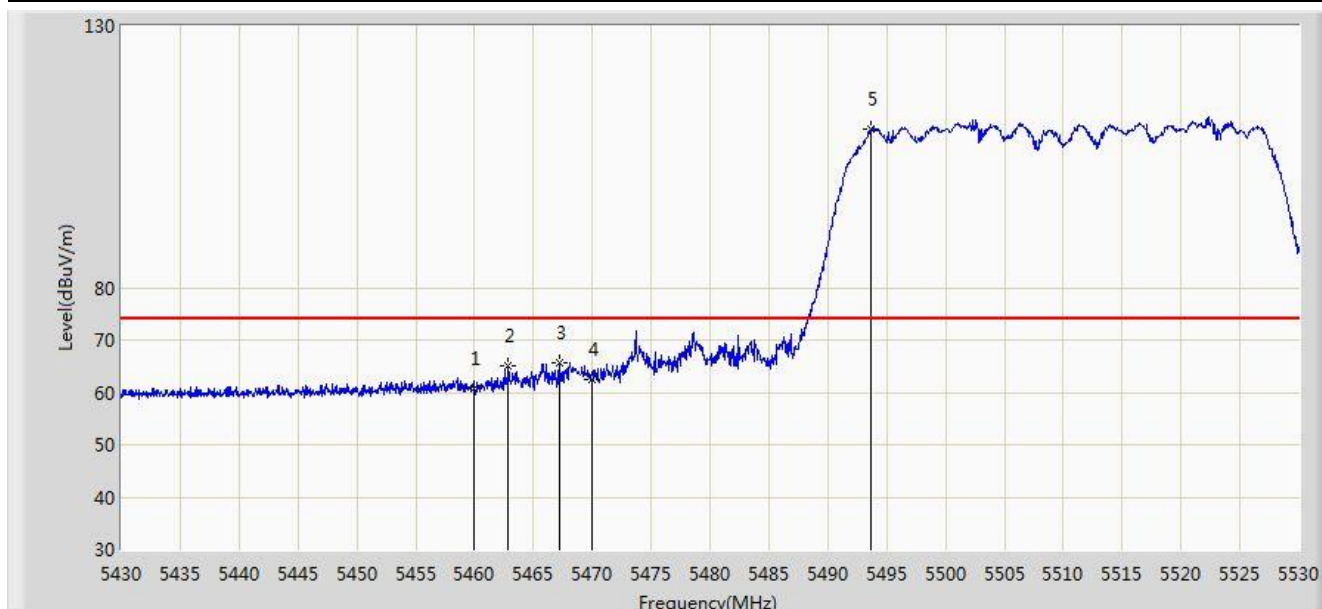


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	60.614	56.434	-13.386	74.000	4.180	PK
2			5462.850	64.986	60.800	-3.214	68.200	4.186	PK
3			5467.200	65.562	61.366	-2.638	68.200	4.196	PK
4			5470.000	62.440	58.238	-5.760	68.200	4.202	PK
5		*	5493.700	110.349	106.093	N/A	N/A	4.256	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

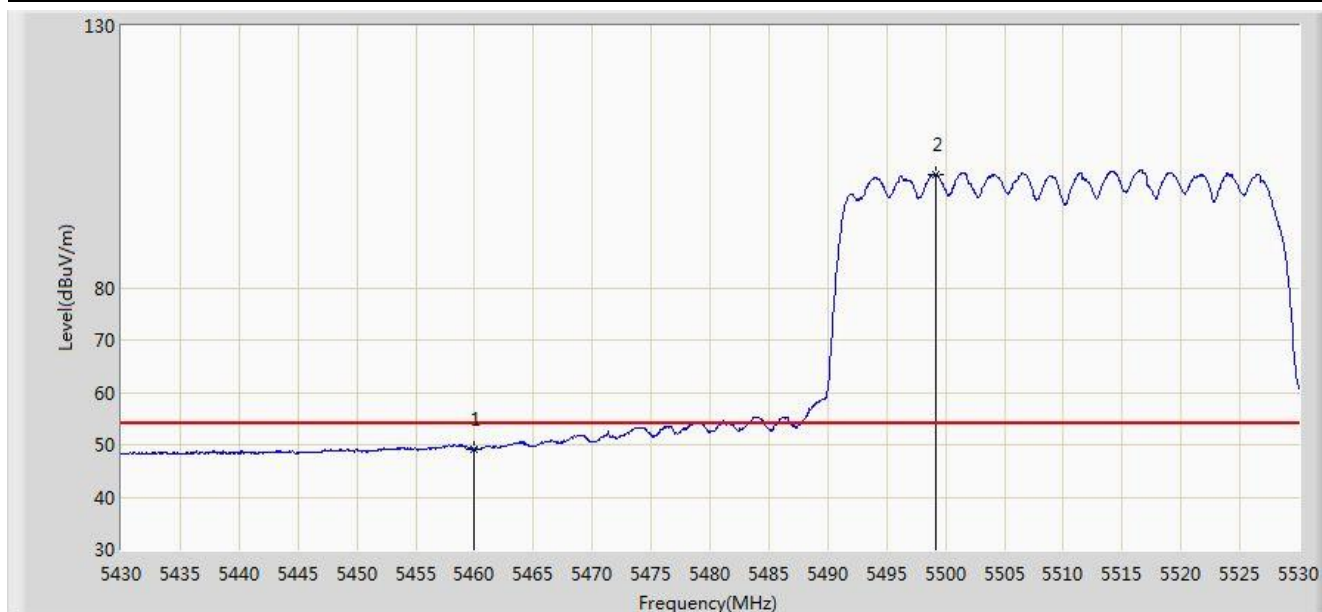


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.053	44.873	-4.947	54.000	4.180	AV
2		*	5499.150	101.668	97.398	N/A	N/A	4.270	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

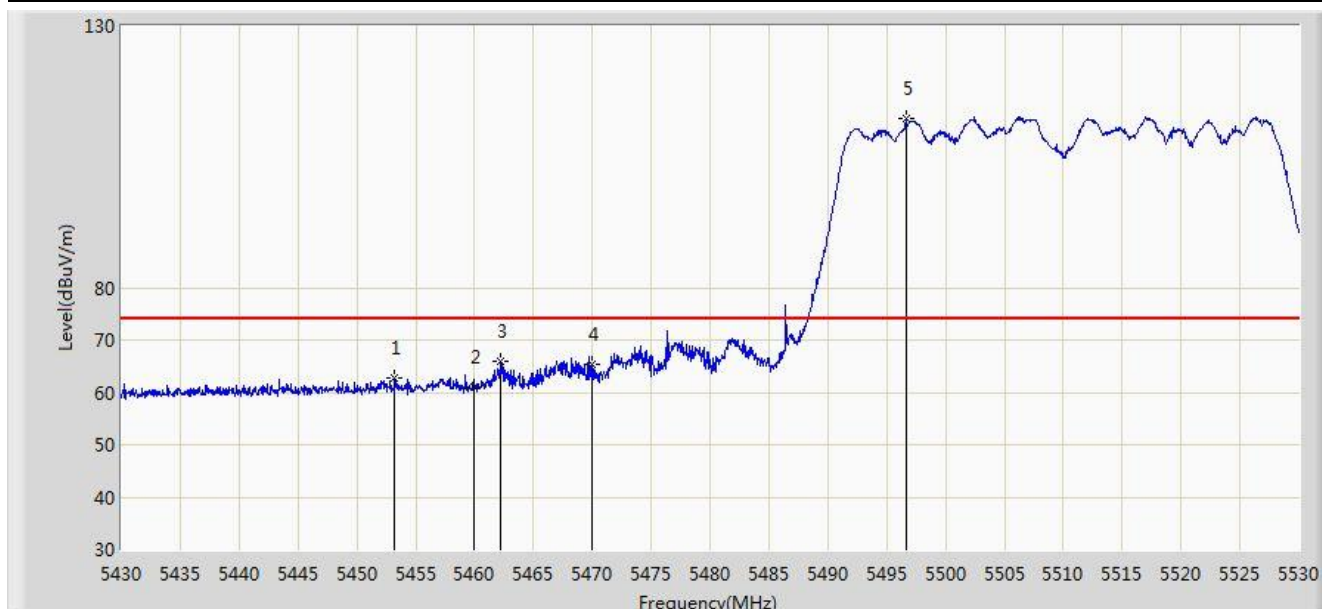


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.200	62.722	58.557	-11.278	74.000	4.164	PK
2			5460.000	60.959	56.779	-13.041	74.000	4.180	PK
3			5462.200	65.840	61.655	-2.360	68.200	4.185	PK
4			5470.000	65.487	61.285	-2.713	68.200	4.202	PK
5		*	5496.650	112.331	108.068	N/A	N/A	4.264	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

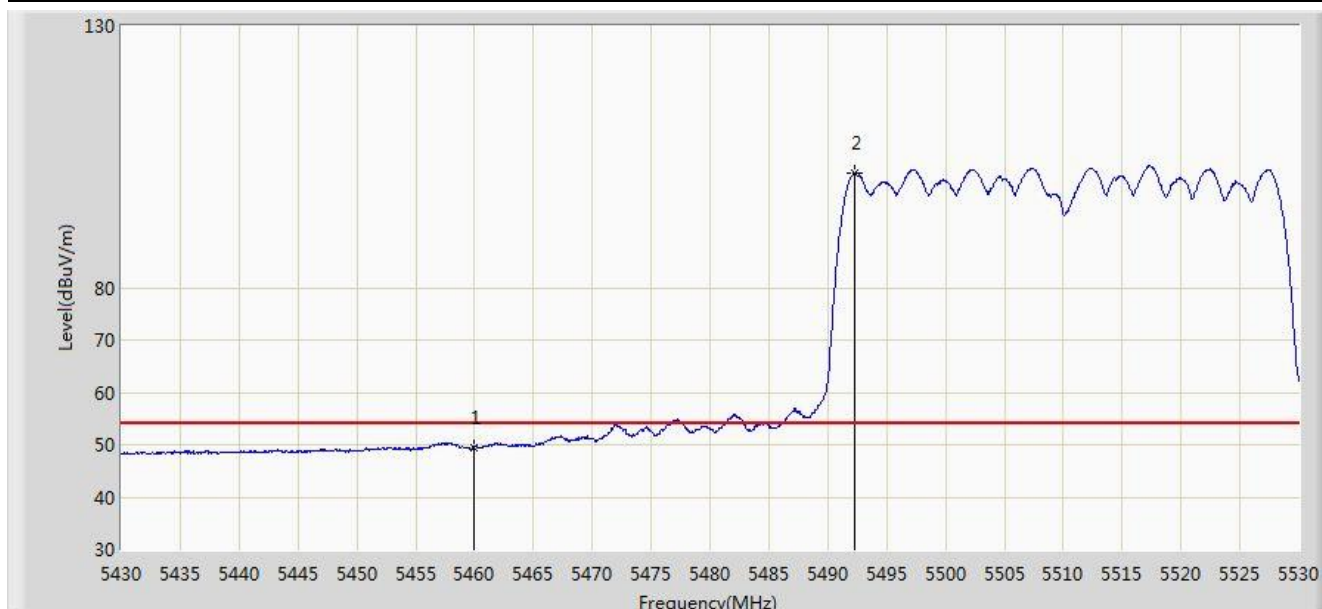


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.509	45.329	-4.491	54.000	4.180	AV
2		*	5492.300	101.922	97.669	N/A	N/A	4.253	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 01:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

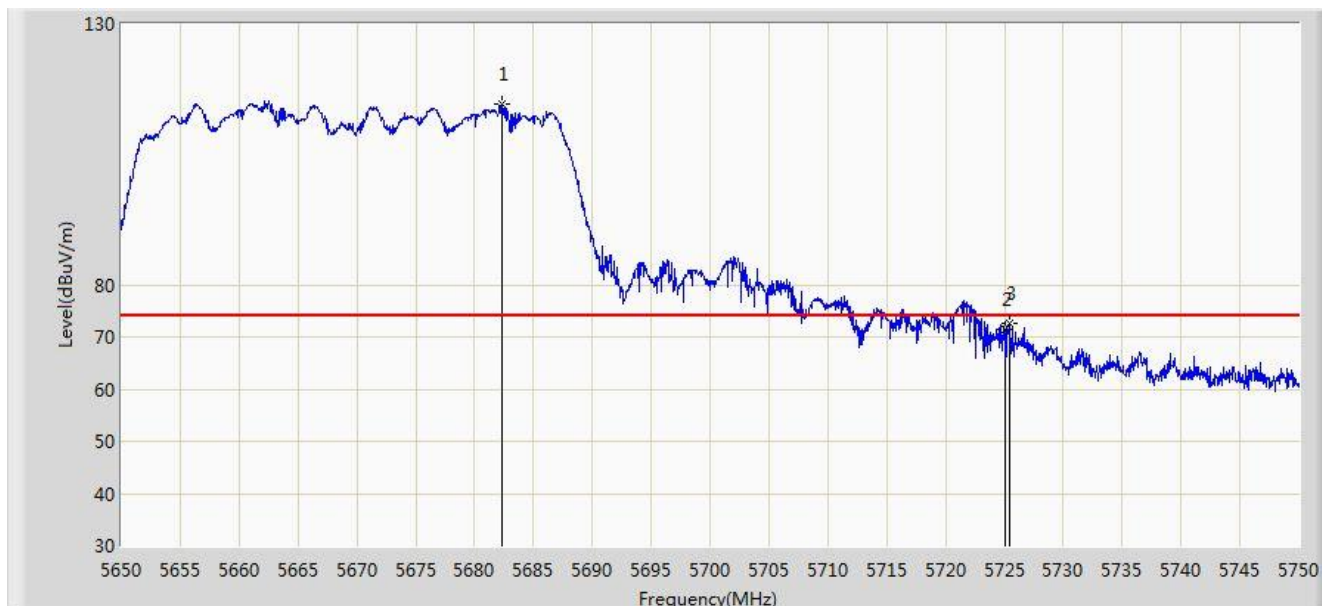


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5682.350	114.698	109.901	N/A	N/A	4.797	PK
2			5725.000	71.439	66.410	-2.561	74.000	5.029	PK
3			5725.500	72.749	67.717	-1.251	74.000	5.032	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 01:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

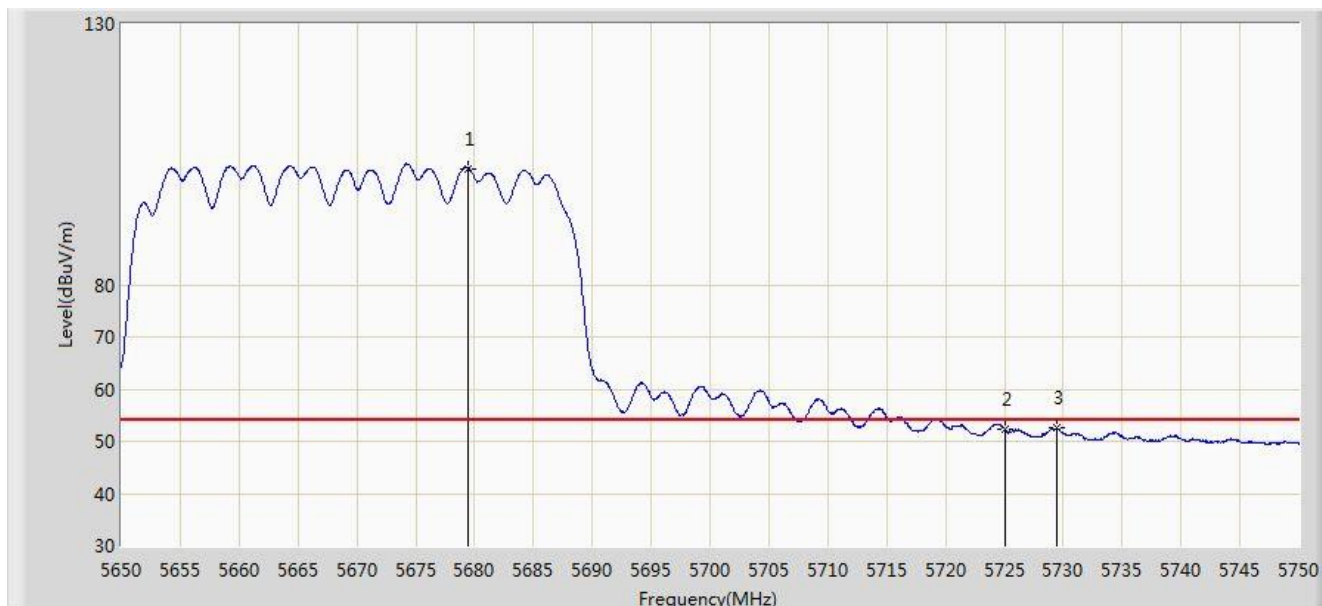


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5679.500	102.252	97.467	N/A	N/A	4.785	AV
2			5725.000	52.393	47.364	-1.607	54.000	5.029	AV
3			5729.400	52.594	47.537	-1.406	54.000	5.057	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 01:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

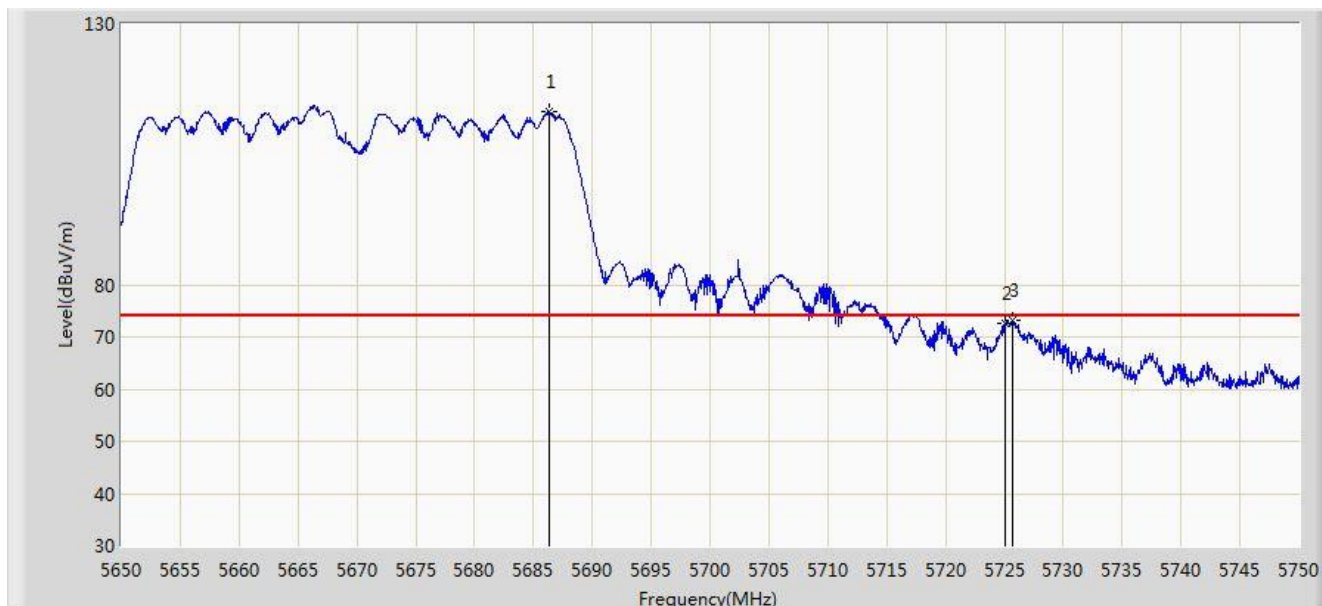


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5686.400	113.126	108.313	N/A	N/A	4.813	PK
2			5725.000	72.624	67.595	-1.376	74.000	5.029	PK
3			5725.650	73.206	68.173	-0.794	74.000	5.033	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 01:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

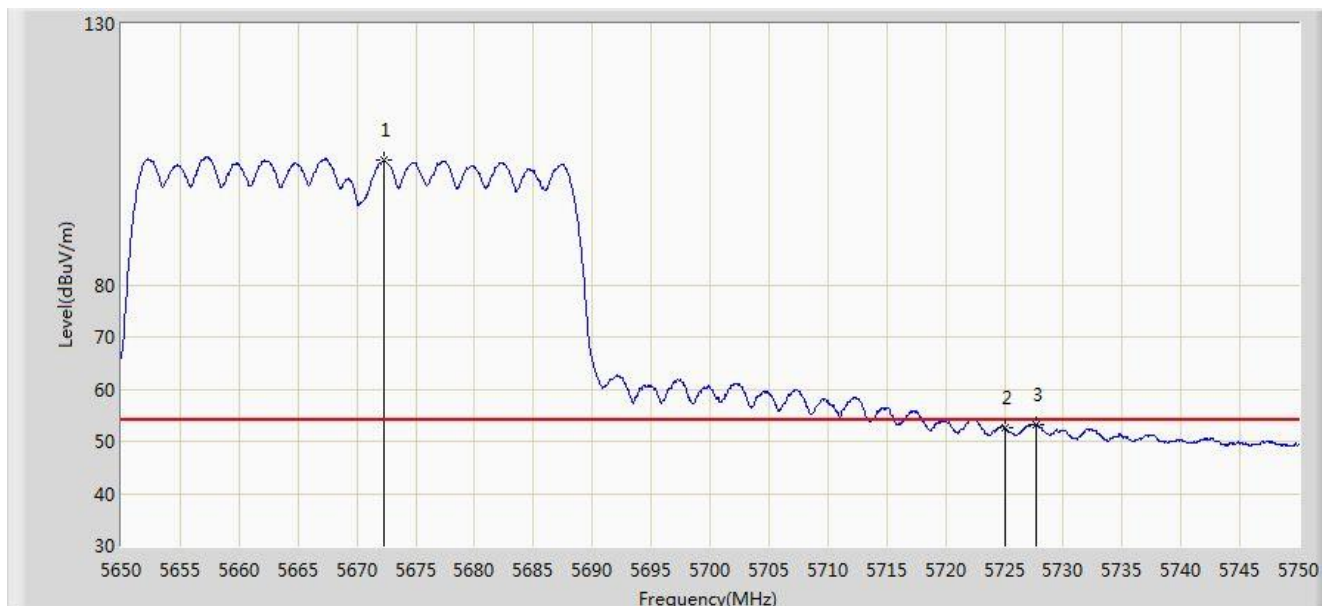


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5672.300	103.779	99.023	N/A	N/A	4.757	AV
2			5725.000	52.745	47.716	-1.255	54.000	5.029	AV
3			5727.700	53.166	48.120	-0.834	54.000	5.046	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 01:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5755MHz	

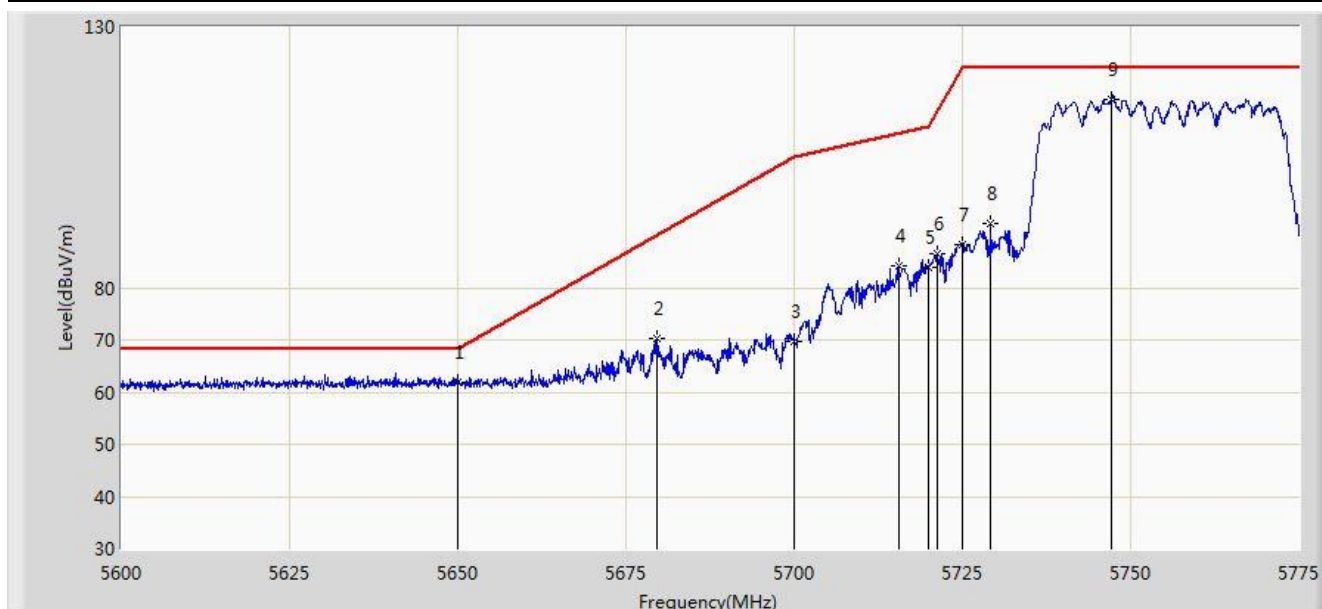


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	61.888	57.217	-6.312	68.200	4.671	PK
2			5679.712	70.149	65.363	-20.077	90.226	4.786	PK
3			5700.000	69.716	64.838	-35.484	105.200	4.878	PK
4			5715.500	84.218	79.250	-25.324	109.542	4.968	PK
5			5720.000	83.980	78.983	-26.820	110.800	4.997	PK
6			5721.187	86.500	81.496	-27.007	113.507	5.005	PK
7			5725.000	88.323	83.294	-33.877	122.200	5.029	PK
8			5729.150	92.306	87.251	-29.894	122.200	5.055	PK
9		*	5747.087	116.217	111.050	N/A	N/A	5.166	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 01:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5755MHz	

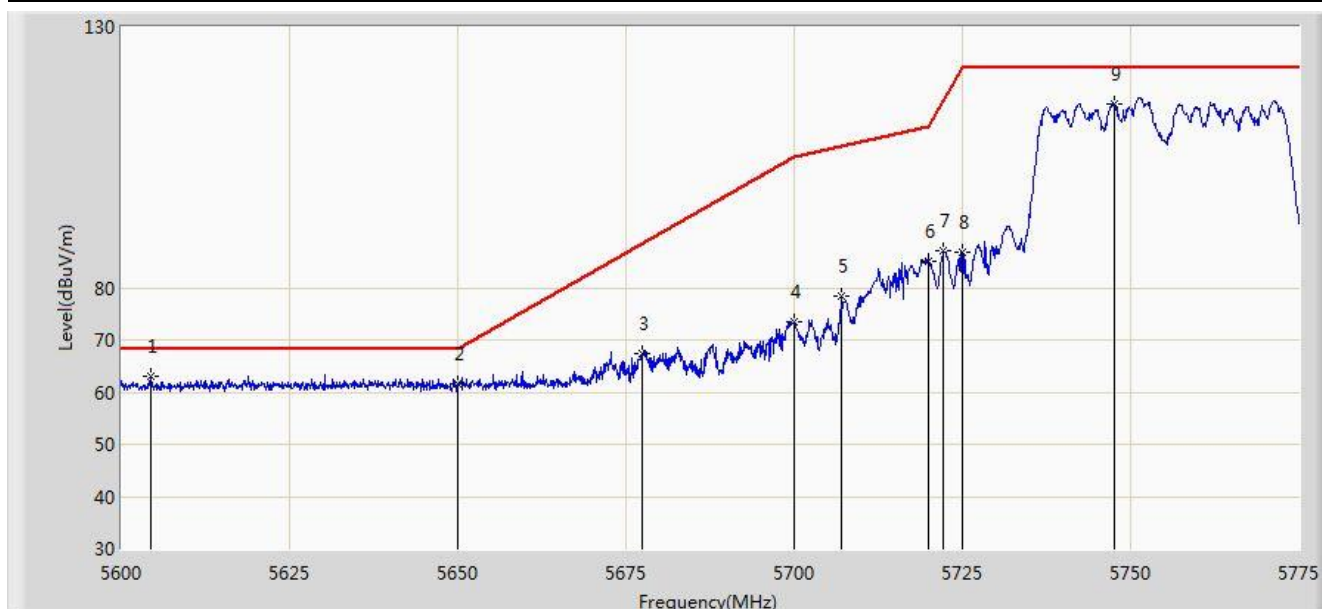


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5604.288	63.178	58.641	-5.022	68.200	4.537	PK
2			5650.000	61.463	56.792	-6.737	68.200	4.671	PK
3			5677.350	67.465	62.688	-21.015	88.479	4.777	PK
4			5700.000	73.405	68.527	-31.795	105.200	4.878	PK
5			5706.925	78.510	73.595	-28.631	107.141	4.915	PK
6			5720.000	85.010	80.013	-25.790	110.800	4.997	PK
7			5722.237	87.070	82.059	-28.831	115.902	5.012	PK
8			5725.000	86.778	81.749	-35.422	122.200	5.029	PK
9			5747.525	115.266	110.097	N/A	N/A	5.170	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 01:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5795MHz	

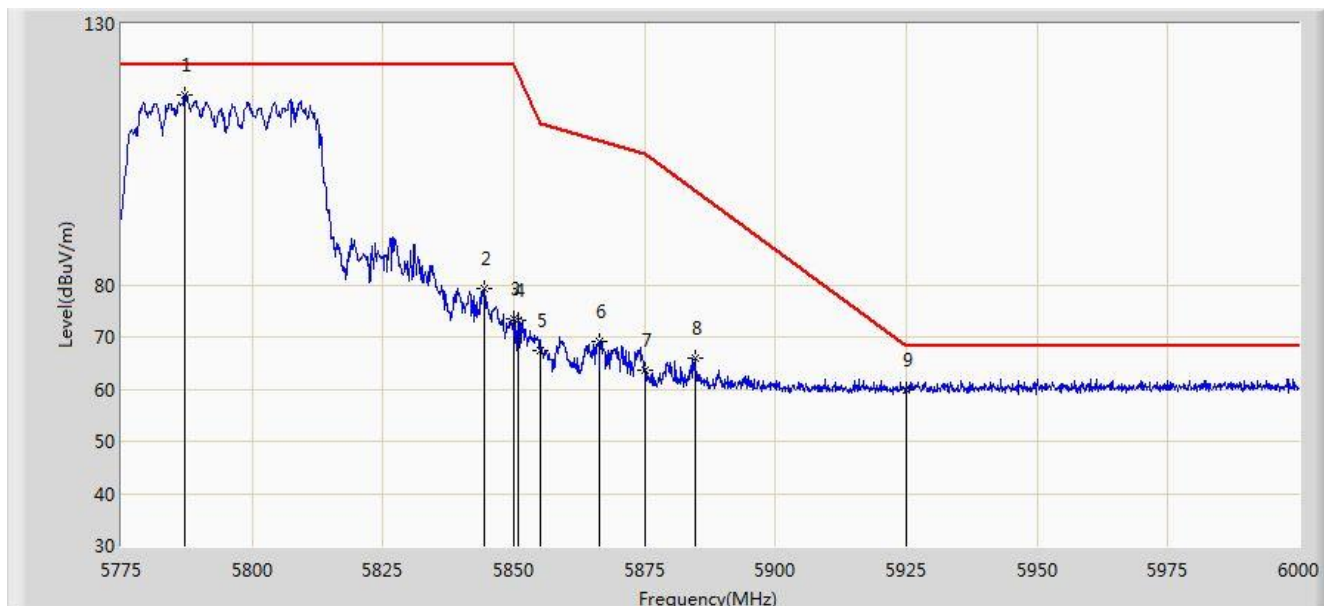


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.263	116.500	111.122	N/A	N/A	5.378	PK
2			5844.300	79.239	73.538	-42.961	122.200	5.701	PK
3			5850.000	73.334	67.608	-48.866	122.200	5.726	PK
4			5850.825	73.233	67.504	-47.085	120.318	5.729	PK
5			5855.000	67.488	61.742	-43.312	110.800	5.746	PK
6			5866.462	69.109	63.318	-38.480	107.588	5.790	PK
7			5875.000	63.748	57.928	-41.452	105.200	5.820	PK
8			5884.687	66.062	60.209	-31.945	98.007	5.853	PK
9			5925.000	59.791	53.825	-8.409	68.200	5.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 01:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5795MHz	

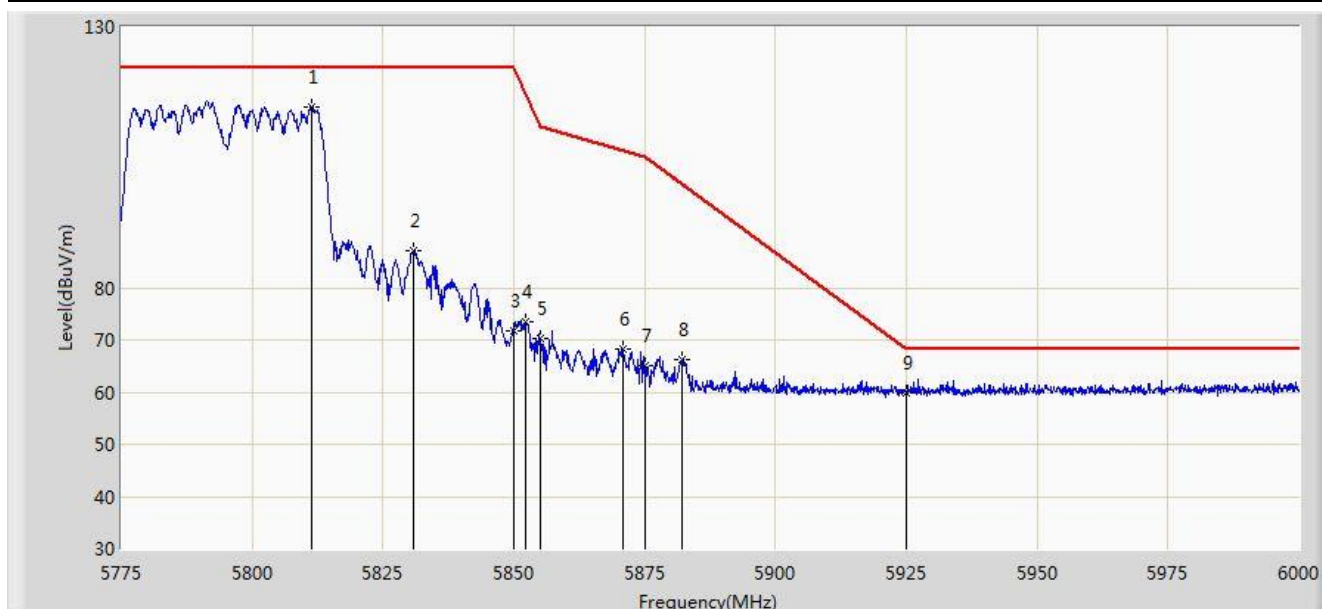


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5811.450	114.636	109.127	N/A	N/A	5.509	PK
2			5830.913	87.110	81.488	-35.090	122.200	5.622	PK
3			5850.000	71.681	65.955	-50.519	122.200	5.726	PK
4			5852.288	73.390	67.655	-43.592	116.982	5.735	PK
5			5855.000	70.191	64.445	-40.609	110.800	5.746	PK
6			5870.850	68.404	62.598	-37.957	106.360	5.805	PK
7			5875.000	65.017	59.197	-40.183	105.200	5.820	PK
8			5882.212	66.295	60.450	-33.549	99.844	5.845	PK
9			5925.000	59.966	54.000	-8.234	68.200	5.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 02:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

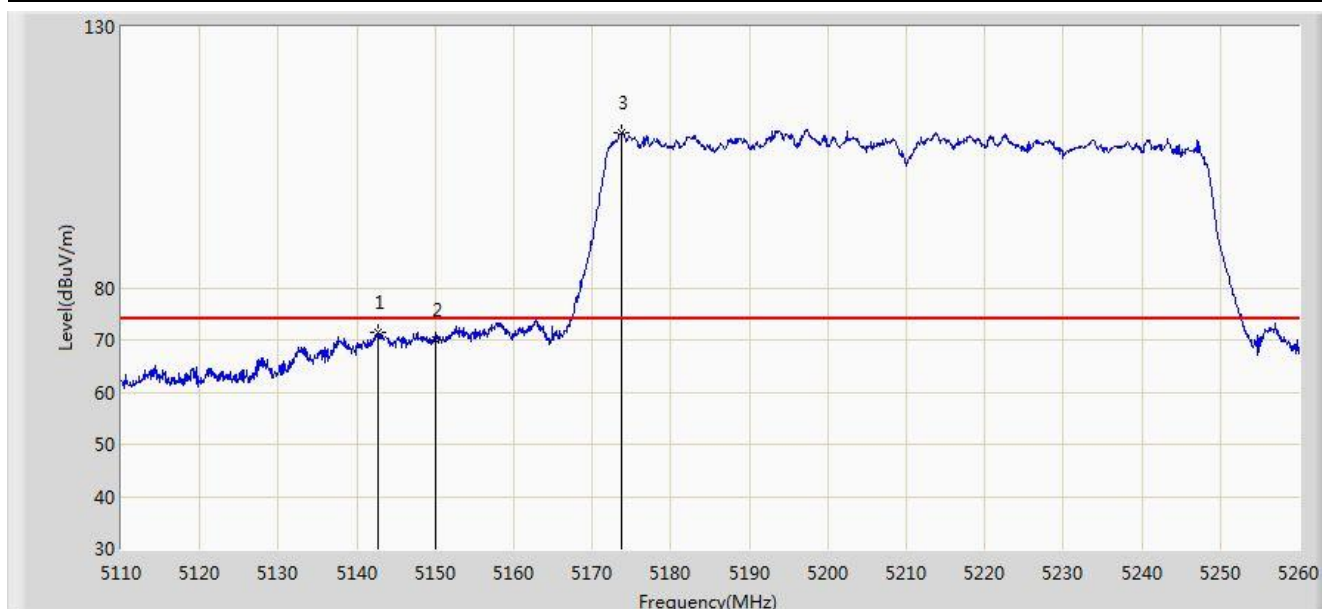


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.625	71.484	67.308	-2.516	74.000	4.176	PK
2			5150.000	70.074	65.905	-3.926	74.000	4.170	PK
3		*	5173.675	109.734	105.643	N/A	N/A	4.091	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 02:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

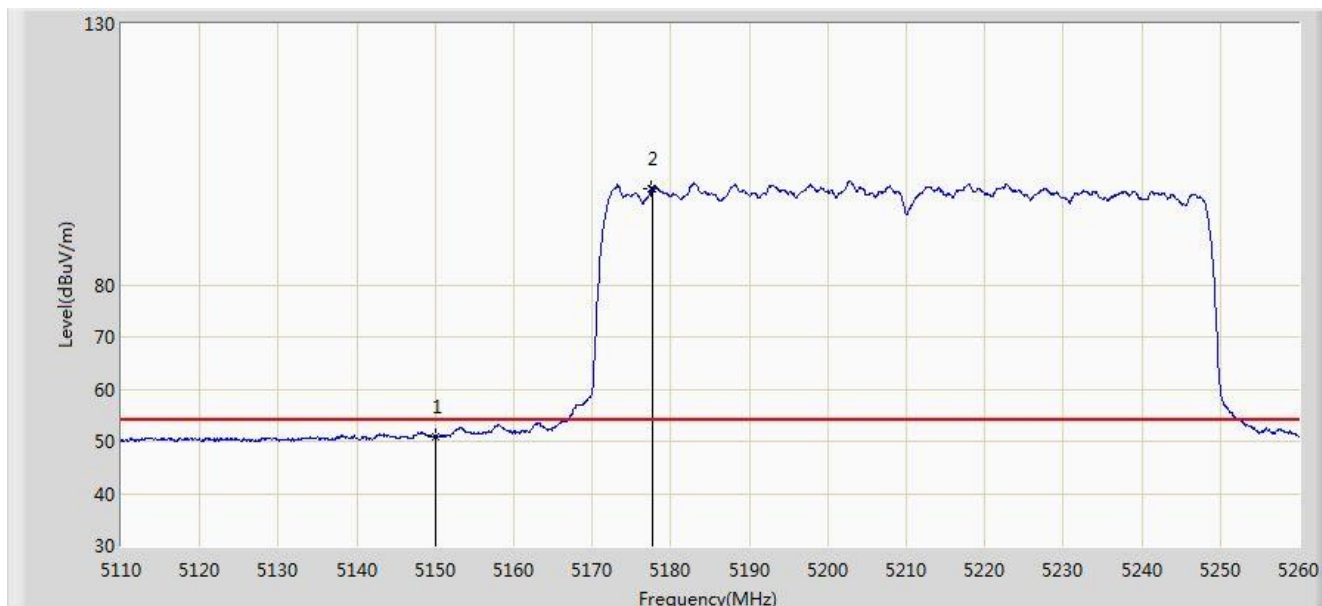


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.990	46.821	-3.010	54.000	4.170	AV
2		*	5177.575	98.492	94.415	N/A	N/A	4.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 01:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

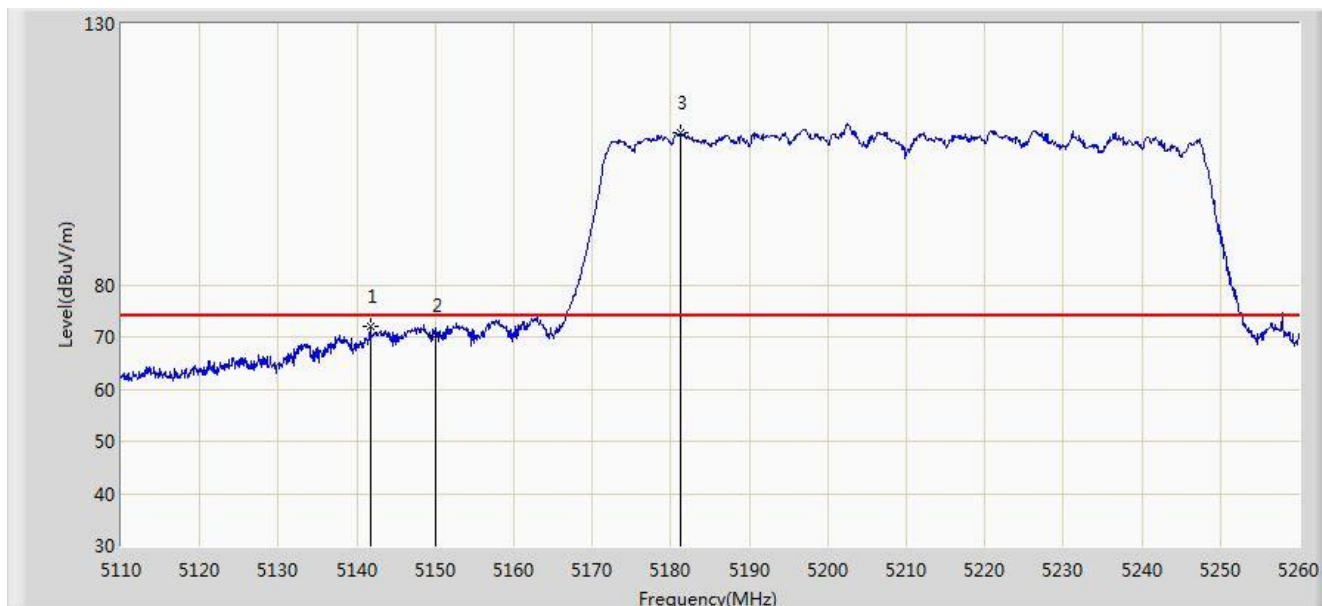


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.725	72.083	67.907	-1.917	74.000	4.176	PK
2			5150.000	70.360	66.191	-3.640	74.000	4.170	PK
3		*	5181.175	109.118	105.053	N/A	N/A	4.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 02:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

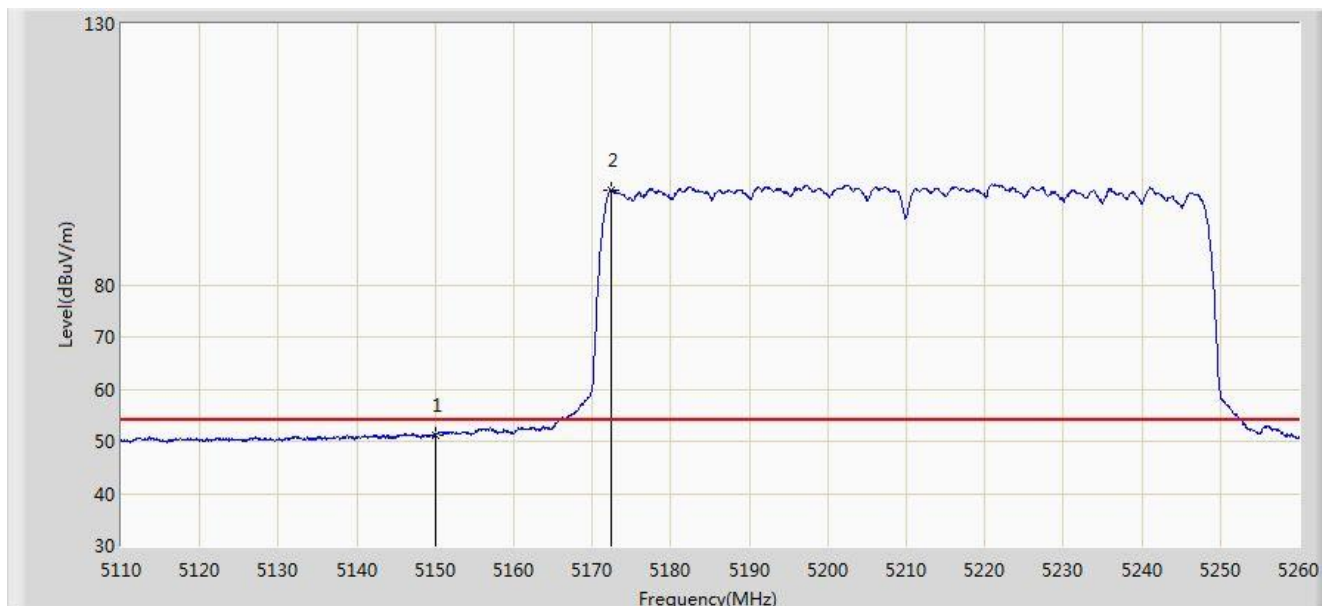


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.301	47.132	-2.699	54.000	4.170	AV
2		*	5172.475	98.176	94.080	N/A	N/A	4.095	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 02:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

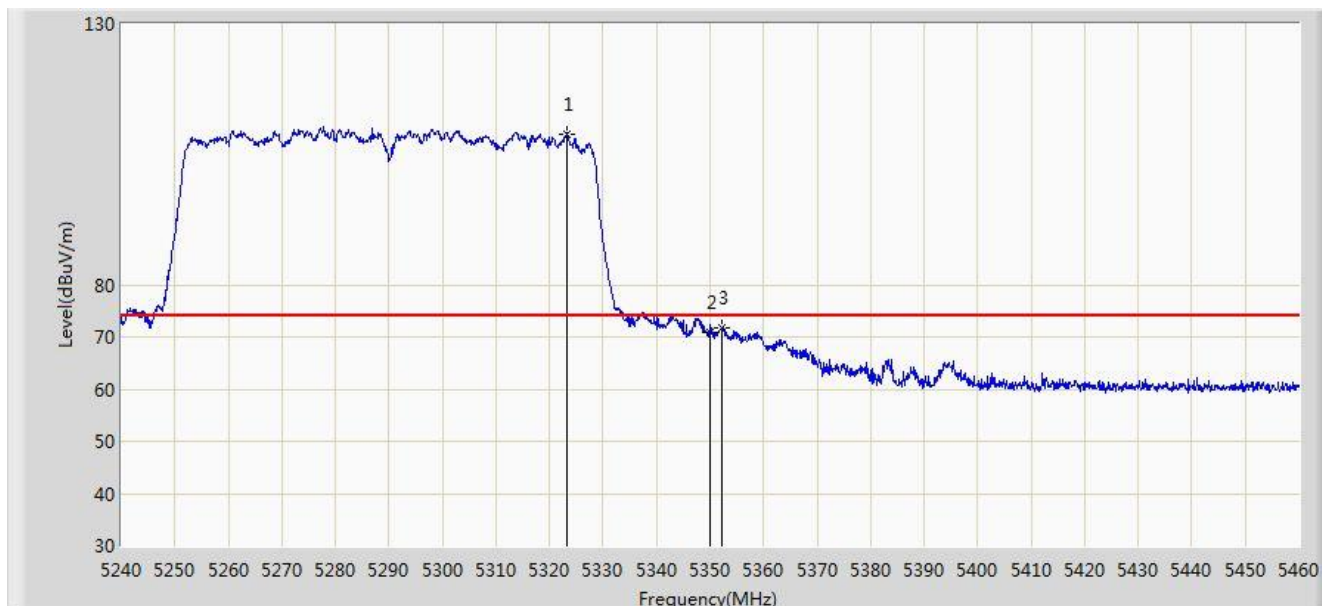


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.380	108.917	105.062	N/A	N/A	3.855	PK
2			5350.000	70.836	66.931	-3.164	74.000	3.904	PK
3			5352.200	71.776	67.867	-2.224	74.000	3.908	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 02:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

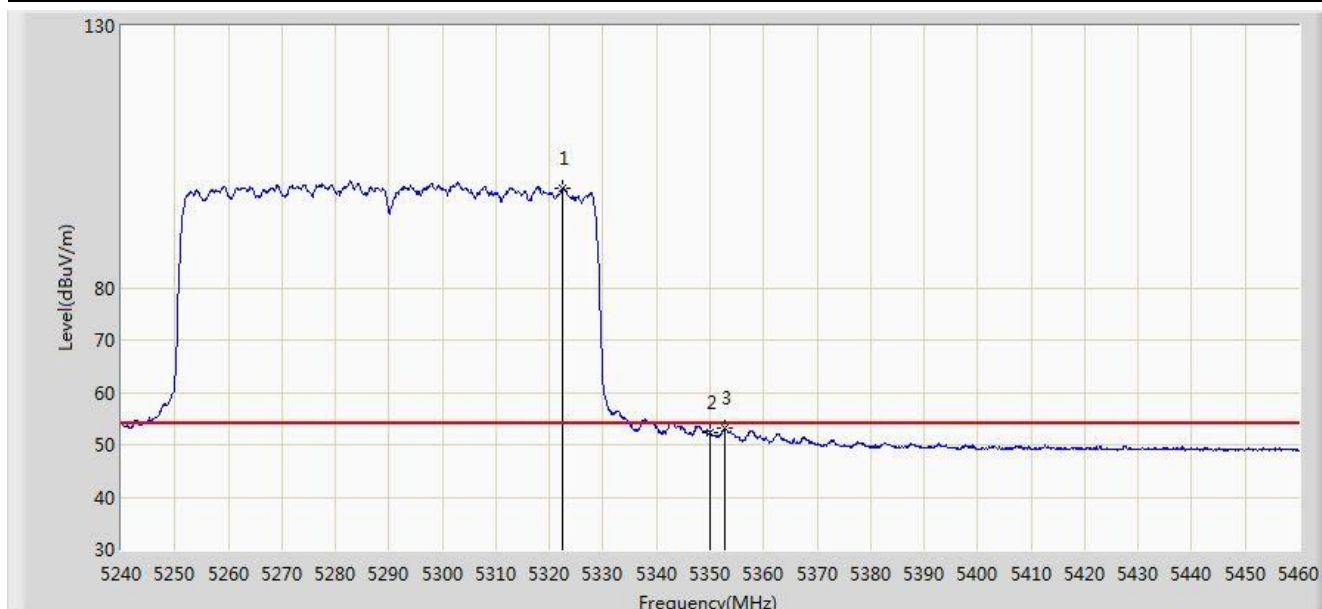


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.500	98.930	95.077	N/A	N/A	3.853	AV
2			5350.000	52.406	48.501	-1.594	54.000	3.904	AV
3			5352.860	53.150	49.240	-0.850	54.000	3.911	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 02:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

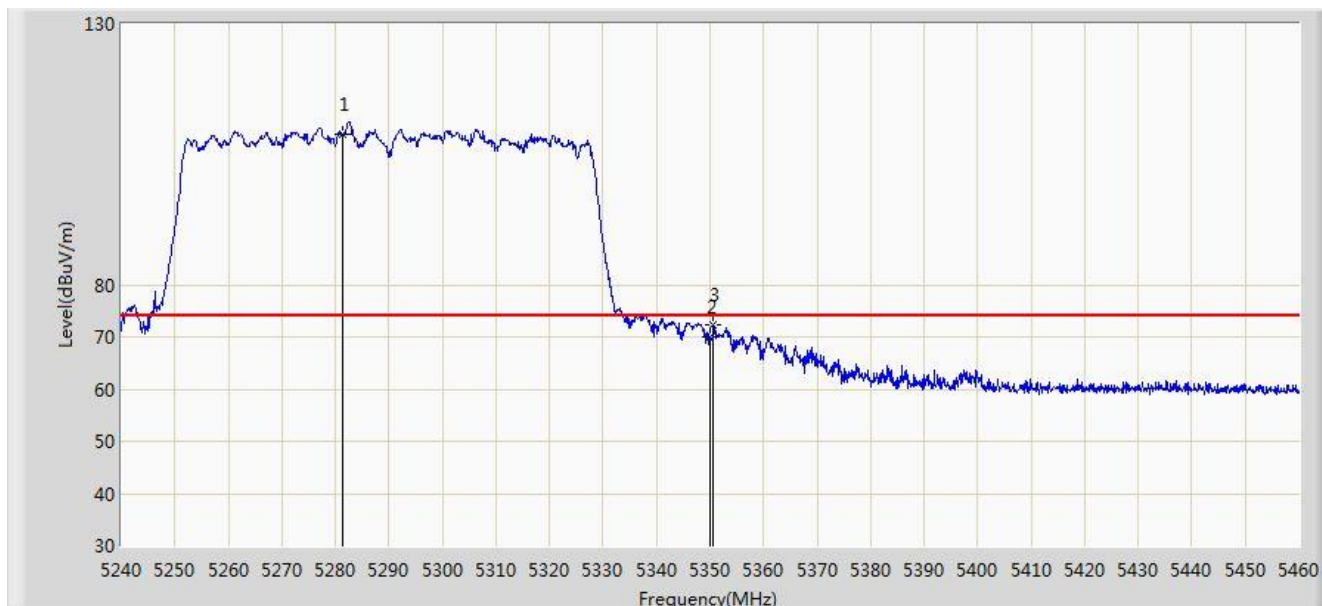


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5281.250	108.770	104.944	N/A	N/A	3.825	PK
2			5350.000	69.876	65.971	-4.124	74.000	3.904	PK
3			5350.660	72.246	68.340	-1.754	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 02:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

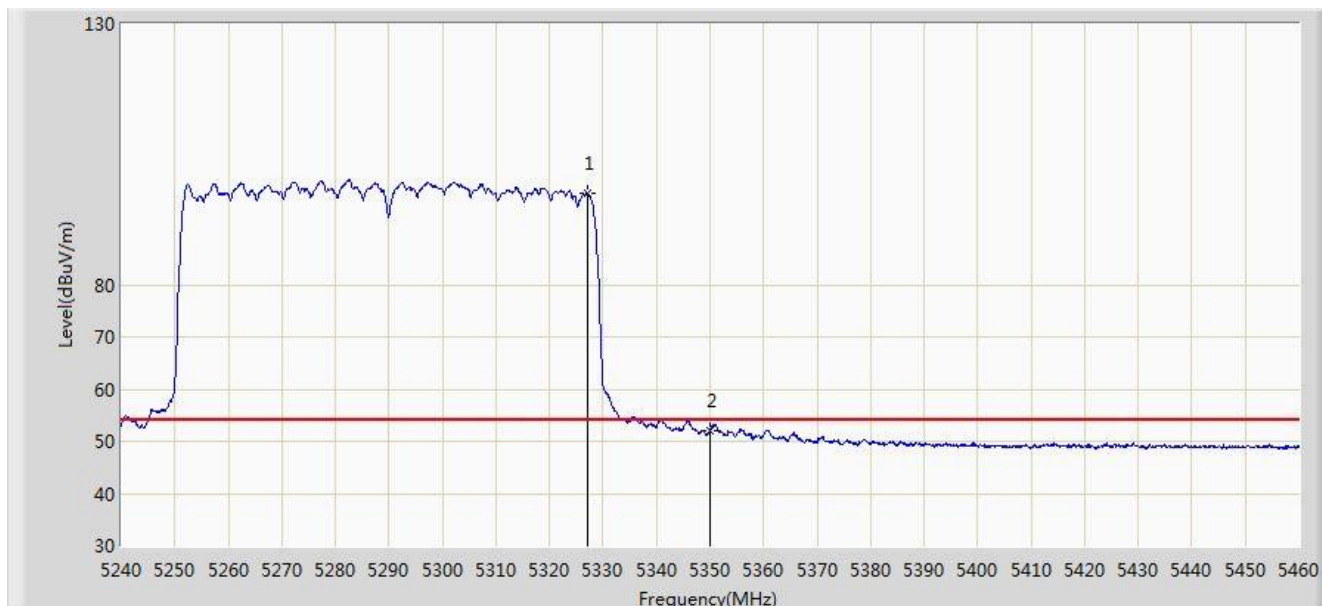


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.120	97.553	93.691	N/A	N/A	3.862	AV
2			5350.000	51.976	48.071	-2.024	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

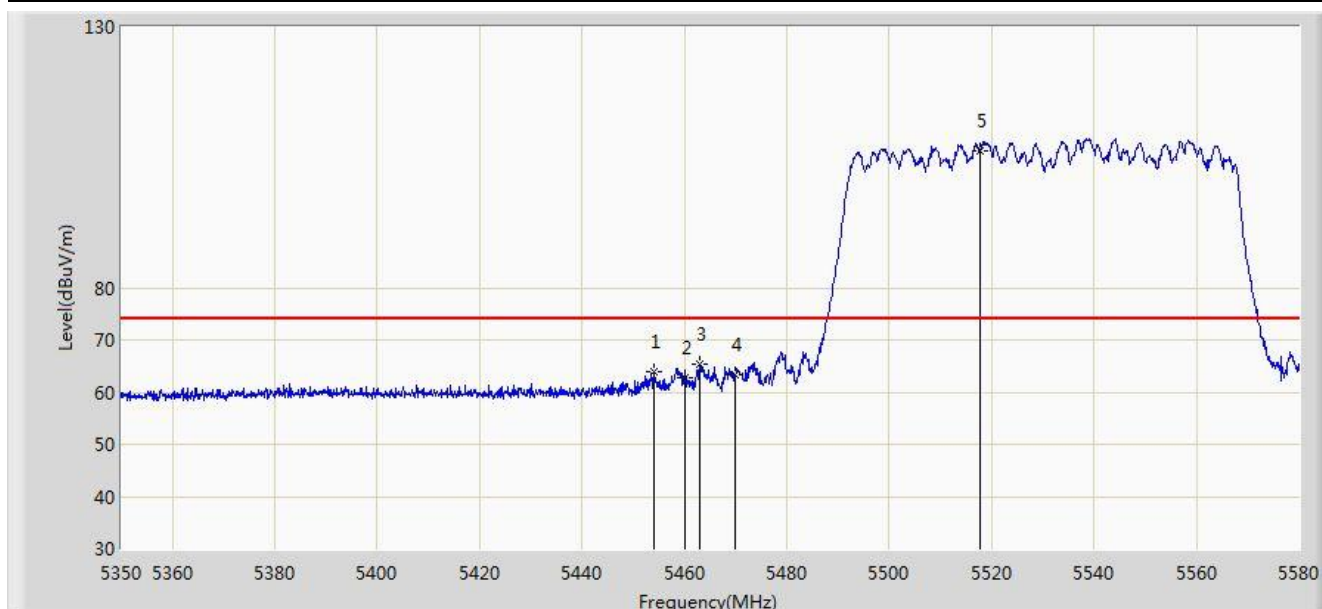


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.190	64.014	59.846	-9.986	74.000	4.168	PK
2			5460.000	62.712	58.532	-11.288	74.000	4.180	PK
3			5463.045	65.223	61.036	-2.977	68.200	4.187	PK
4			5470.000	63.305	59.103	-4.895	68.200	4.202	PK
5		*	5517.785	106.312	101.988	N/A	N/A	4.324	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

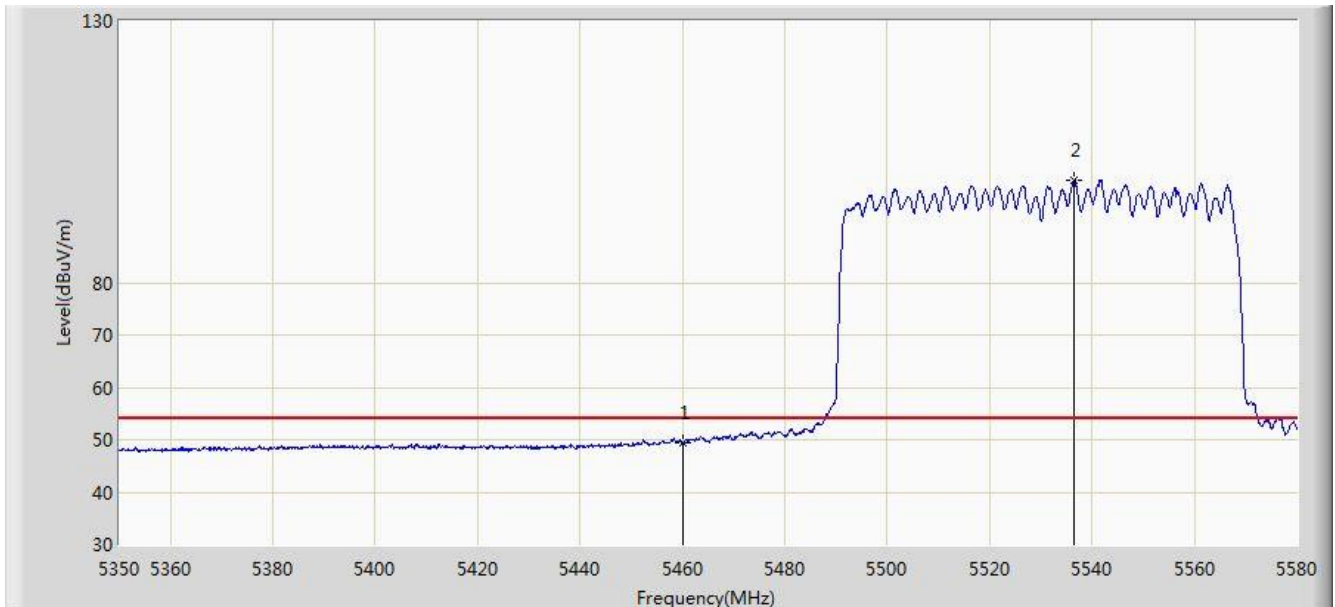


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.424	45.244	-4.576	54.000	4.180	AV
2		*	5536.415	99.577	95.196	N/A	N/A	4.381	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 02:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

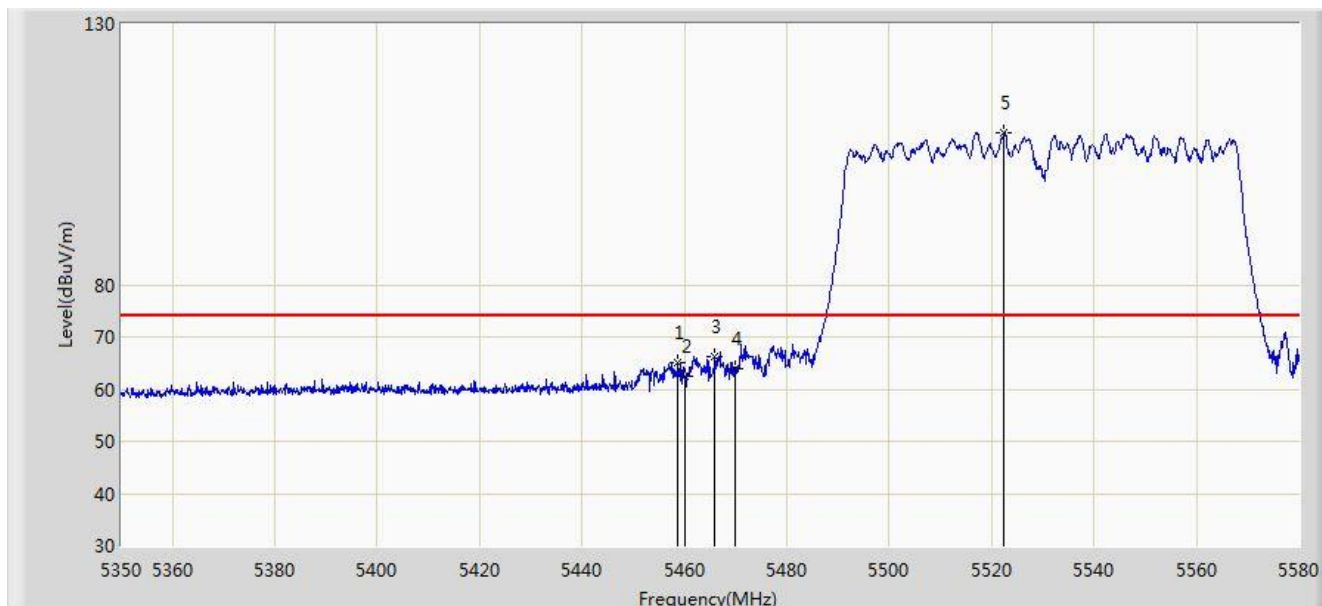


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.675	65.059	60.882	-8.941	74.000	4.178	PK
2			5460.000	62.585	58.405	-11.415	74.000	4.180	PK
3			5465.920	66.160	61.967	-2.040	68.200	4.193	PK
4			5470.000	63.910	59.708	-4.290	68.200	4.202	PK
5		*	5522.385	109.155	104.817	N/A	N/A	4.338	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

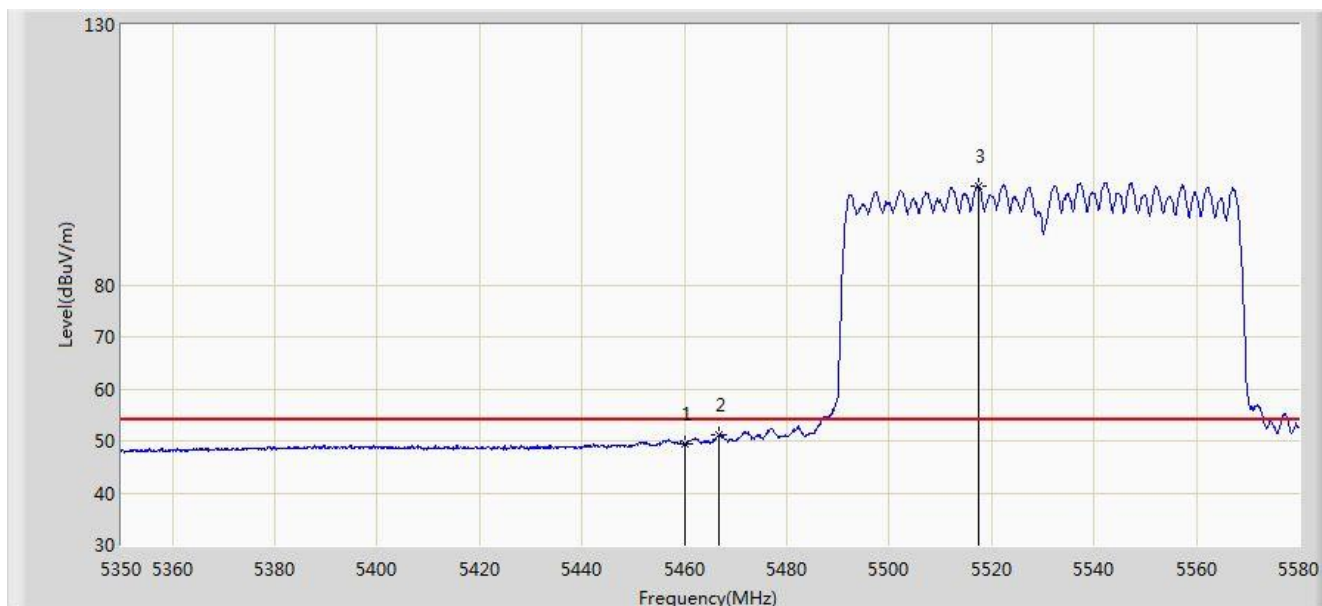


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.450	45.270	-4.550	54.000	4.180	AV
2			5466.610	51.140	46.945	-2.860	54.000	4.196	AV
3		*	5517.325	99.107	94.784	N/A	N/A	4.323	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

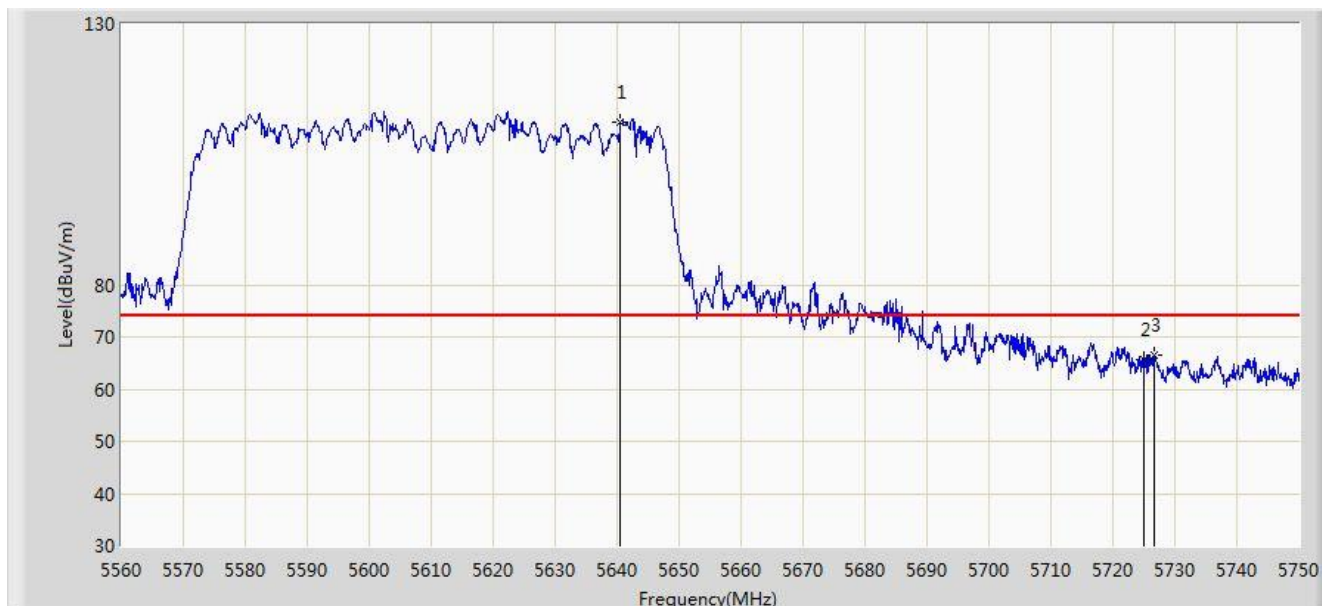


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5640.560	111.286	106.646	N/A	N/A	4.640	PK
2			5725.000	65.517	60.488	-8.483	74.000	5.029	PK
3			5726.630	66.564	61.525	-7.436	74.000	5.039	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

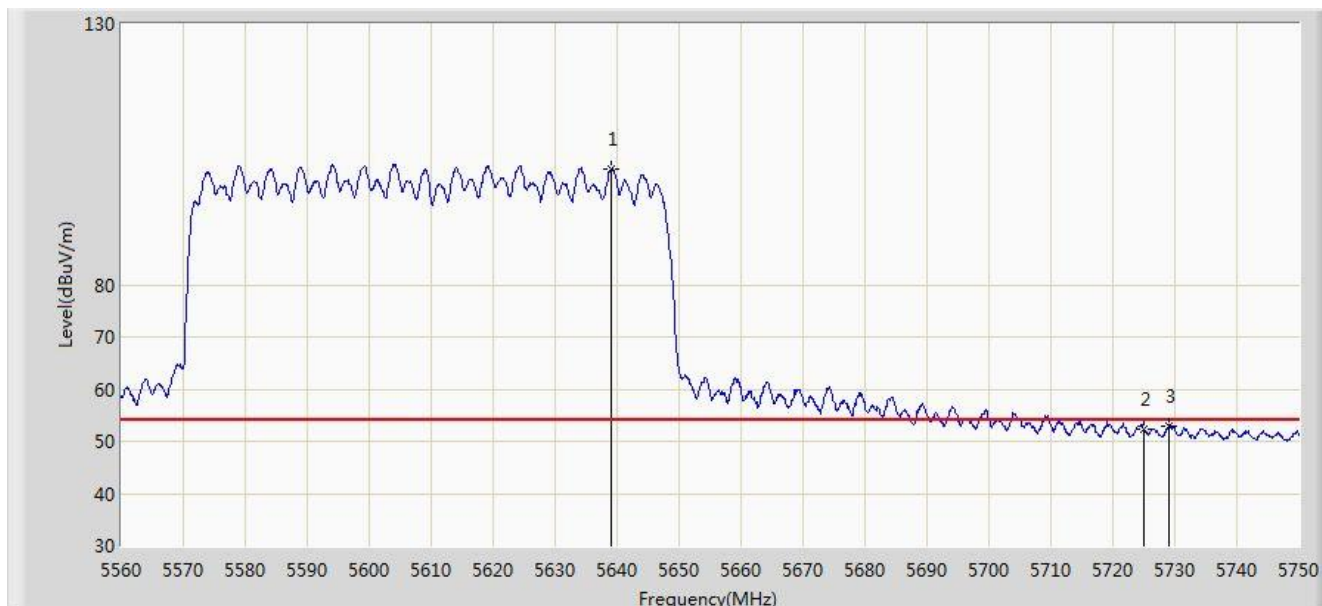


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5639.135	102.317	97.682	N/A	N/A	4.635	AV
2			5725.000	52.209	47.180	-1.791	54.000	5.029	AV
3			5729.005	53.028	47.973	-0.972	54.000	5.054	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

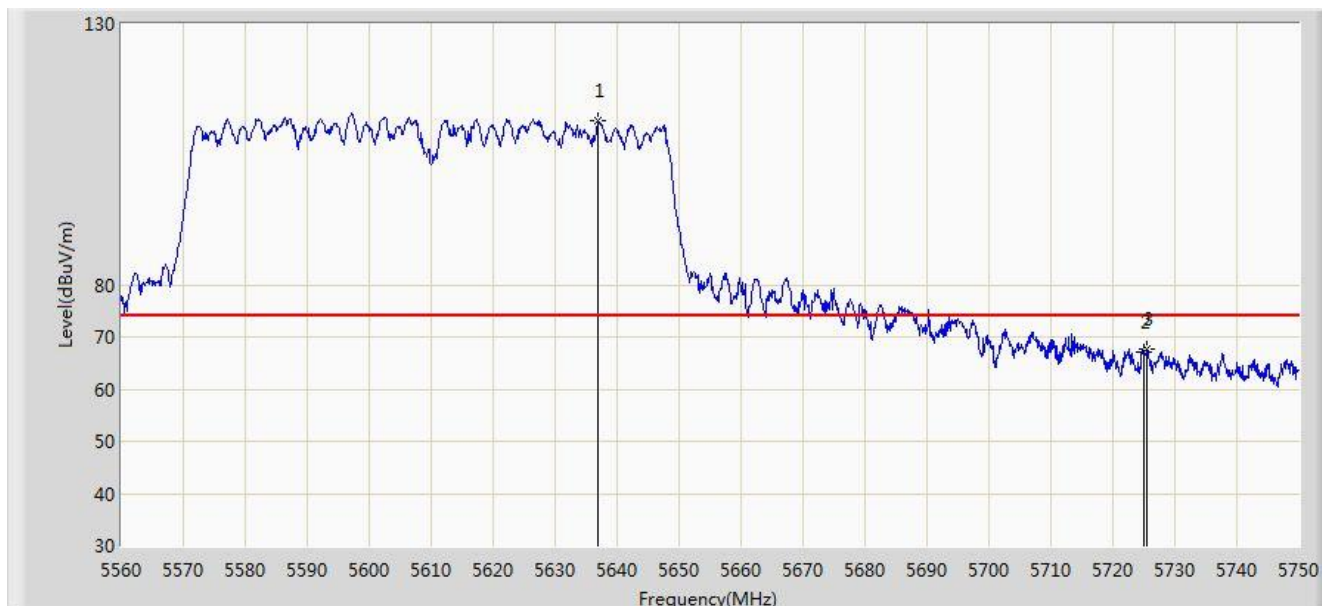


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5636.855	111.321	106.692	N/A	N/A	4.628	PK
2			5725.000	67.217	62.188	-6.783	74.000	5.029	PK
3			5725.585	67.756	62.723	-6.244	74.000	5.032	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

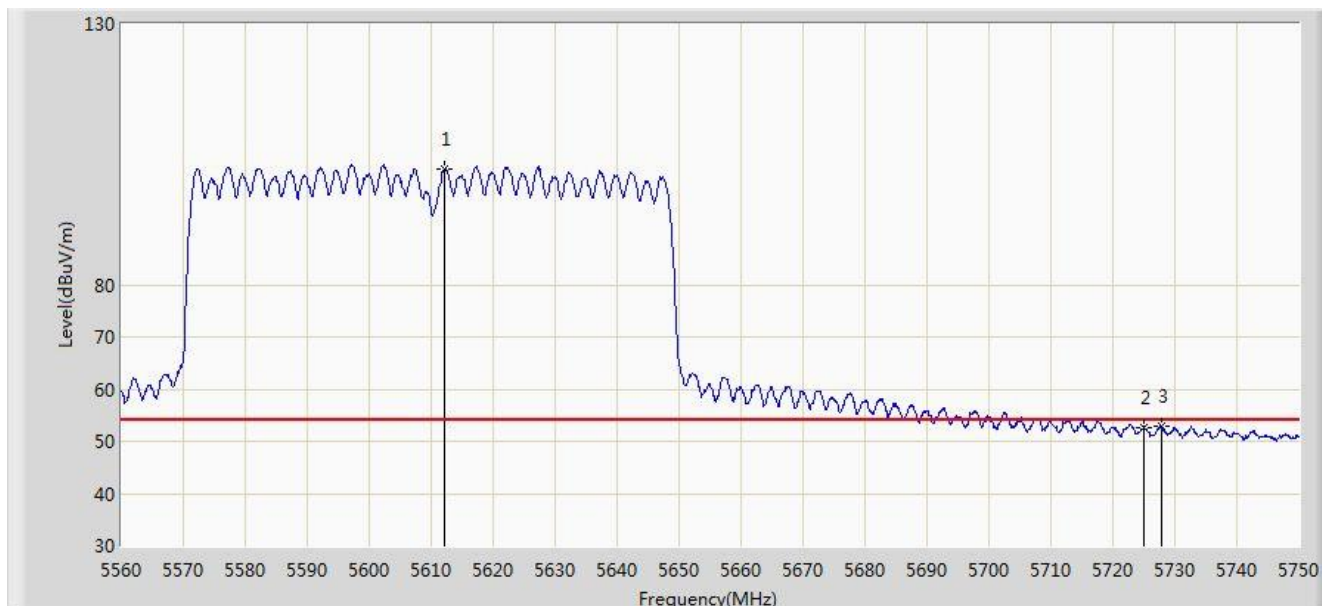


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5612.250	102.271	97.713	N/A	N/A	4.558	AV
2			5725.000	52.628	47.599	-1.372	54.000	5.029	AV
3			5727.770	52.859	47.812	-1.141	54.000	5.047	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5775MHz	

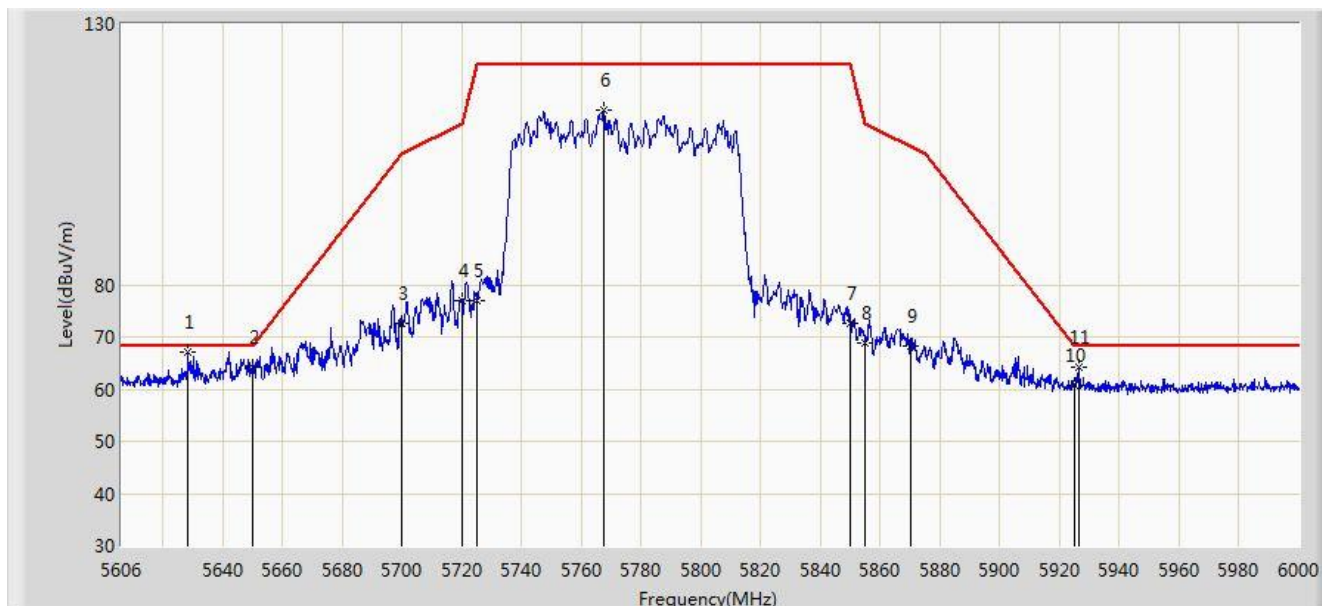


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5628.458	67.225	62.620	-0.975	68.200	4.604	PK
2			5650.000	64.302	59.631	-3.898	68.200	4.671	PK
3			5700.000	72.722	67.844	-32.478	105.200	4.878	PK
4			5720.000	76.963	71.966	-33.837	110.800	4.997	PK
5			5725.000	76.972	71.943	-45.228	122.200	5.029	PK
6			5767.343	113.352	108.075	N/A	N/A	5.278	PK
7			5850.000	72.744	67.018	-49.456	122.200	5.726	PK
8			5855.000	68.931	63.185	-41.869	110.800	5.746	PK
9			5870.000	68.240	62.437	-38.359	106.598	5.803	PK
10			5925.000	60.791	54.825	-7.409	68.200	5.967	PK
11			5926.322	64.082	58.112	-4.118	68.200	5.970	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5775MHz	

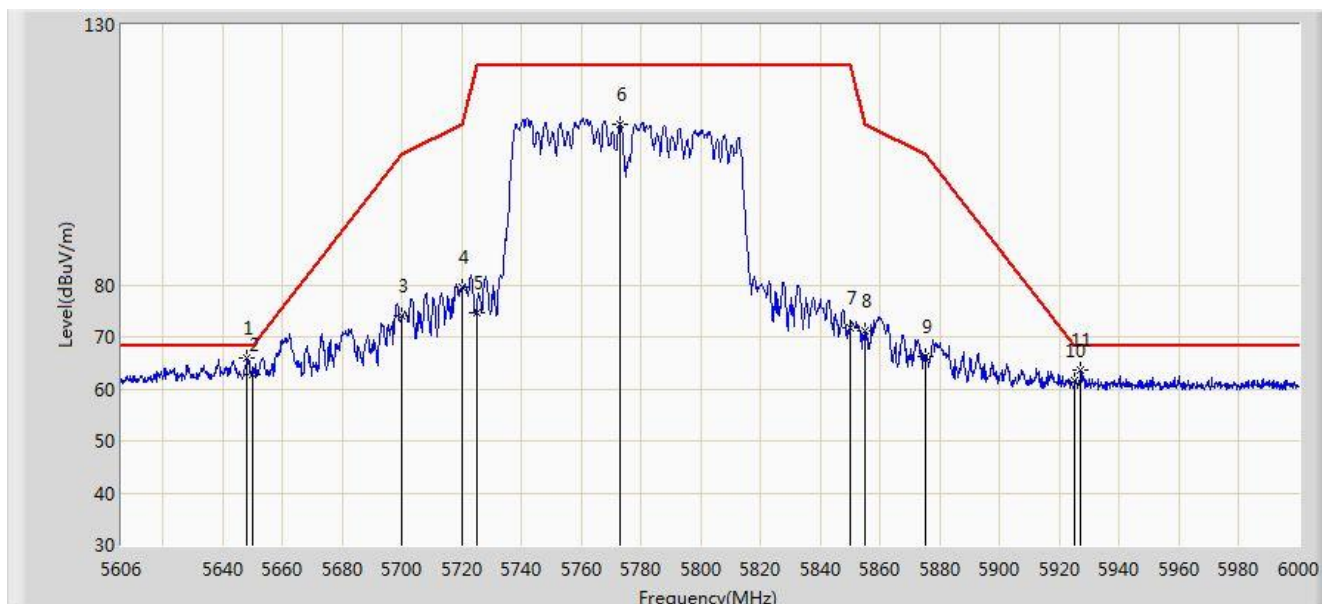


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5648.158	66.030	61.365	-2.170	68.200	4.665	PK
2			5650.000	62.802	58.131	-5.398	68.200	4.671	PK
3			5700.000	74.145	69.267	-31.055	105.200	4.878	PK
4			5720.000	79.491	74.494	-31.309	110.800	4.997	PK
5			5725.000	74.620	69.591	-47.580	122.200	5.029	PK
6			5773.056	110.907	105.601	N/A	N/A	5.307	PK
7			5850.000	71.799	66.073	-50.401	122.200	5.726	PK
8			5855.000	71.141	65.395	-39.659	110.800	5.746	PK
9			5875.000	66.177	60.357	-39.023	105.200	5.820	PK
10			5925.000	61.561	55.595	-6.639	68.200	5.967	PK
11			5927.110	63.662	57.690	-4.538	68.200	5.972	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

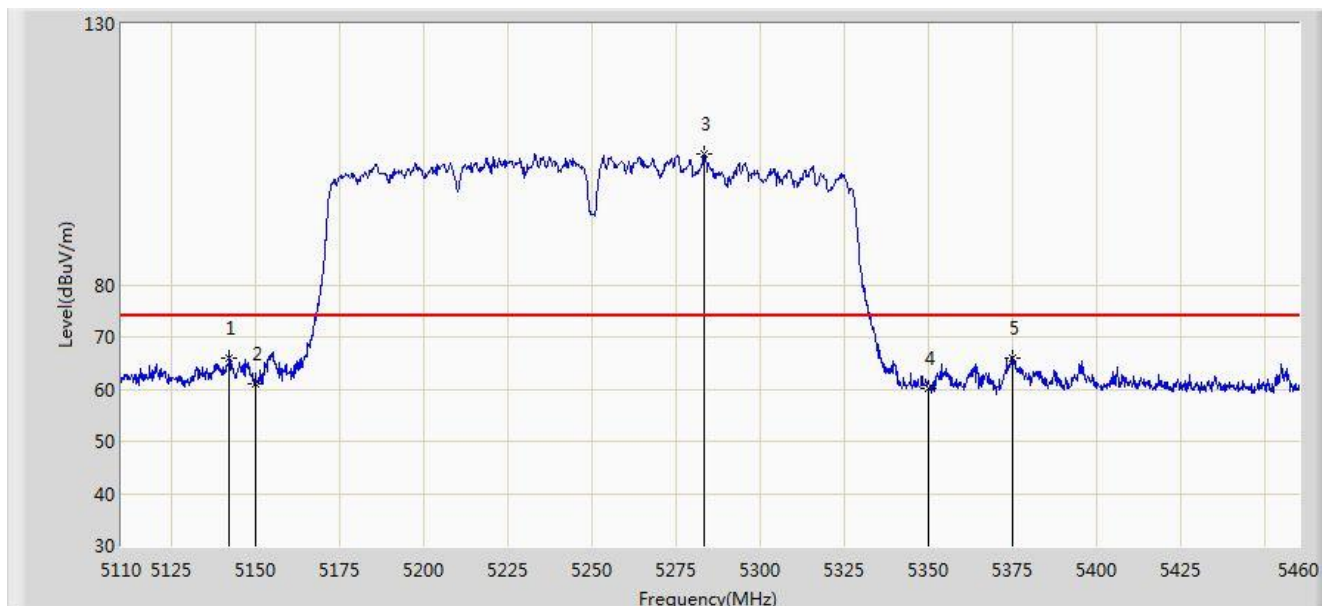


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.025	65.918	61.742	-8.082	74.000	4.176	PK
2			5150.000	61.146	56.977	-12.854	74.000	4.170	PK
3		*	5283.425	105.106	101.282	N/A	N/A	3.825	PK
4			5350.000	60.130	56.225	-13.870	74.000	3.904	PK
5			5375.125	66.027	62.077	-7.973	74.000	3.950	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

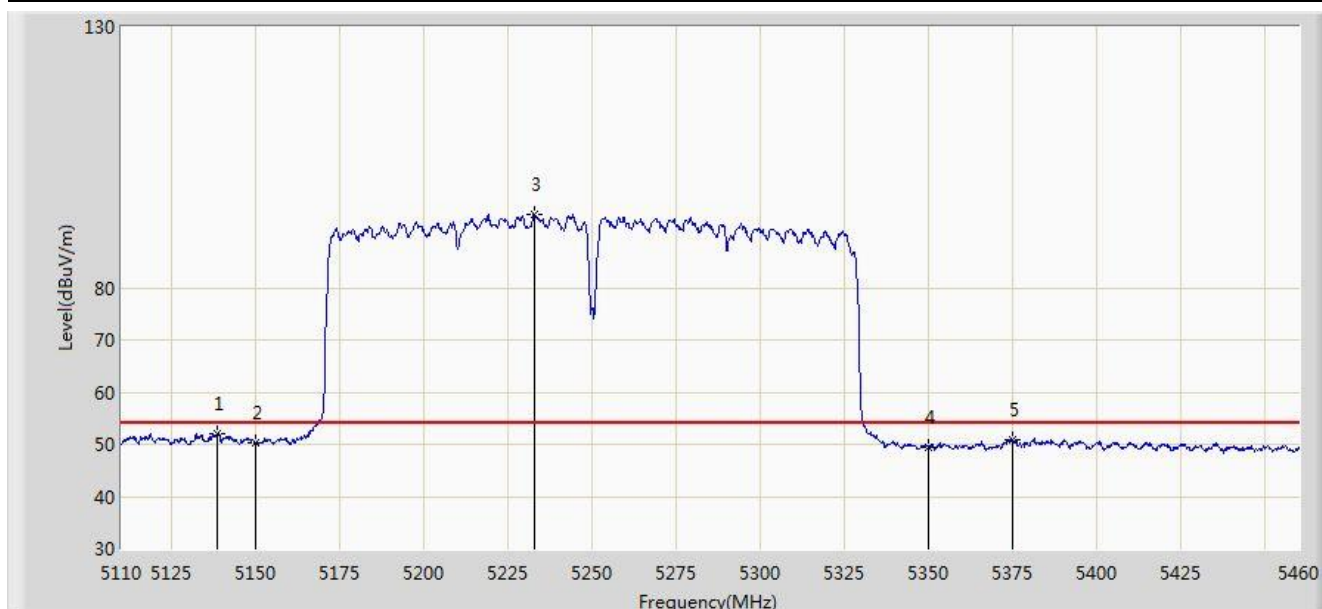


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.350	51.899	51.899	-2.101	54.000	0.000	AV
2			5150.000	50.162	43.600	-3.838	54.000	6.562	AV
3		*	5232.850	94.055	87.646	N/A	N/A	6.408	AV
4			5350.000	49.533	43.073	-4.467	54.000	6.460	AV
5			5374.775	51.001	51.001	-2.999	54.000	0.000	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

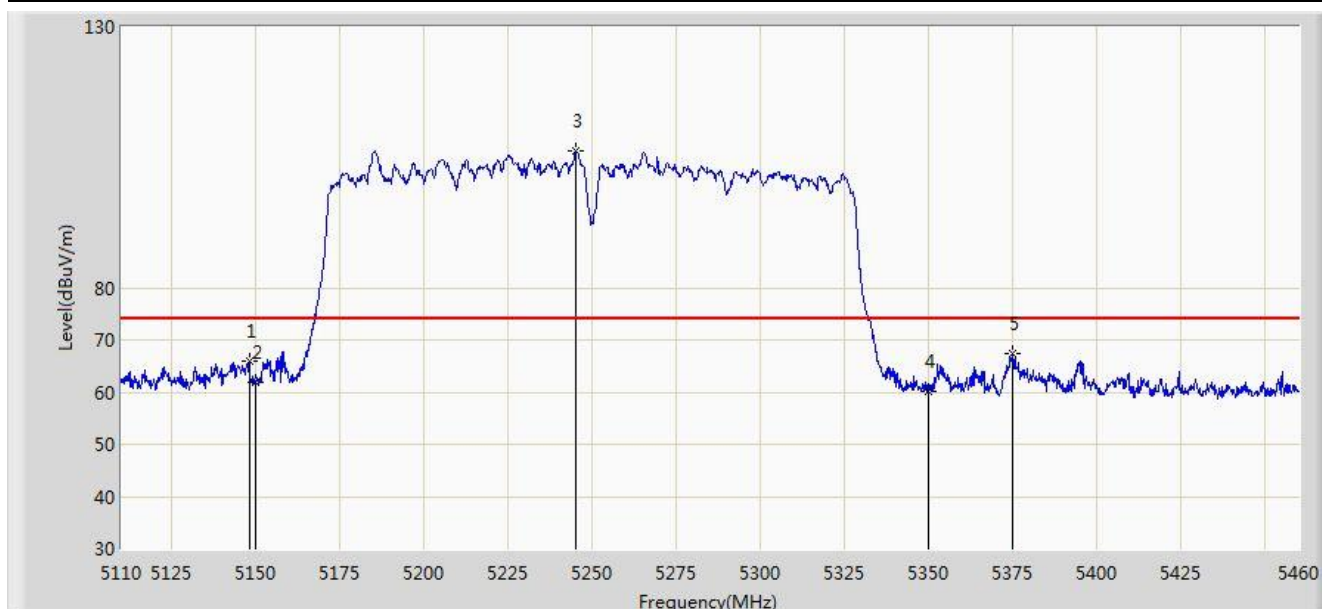


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.975	65.984	61.808	-8.016	74.000	4.176	PK
2			5150.000	61.979	57.810	-12.021	74.000	4.170	PK
3		*	5245.100	106.108	102.243	N/A	N/A	3.865	PK
4			5350.000	60.255	56.350	-13.745	74.000	3.904	PK
5			5374.950	67.388	63.438	-6.612	74.000	3.950	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

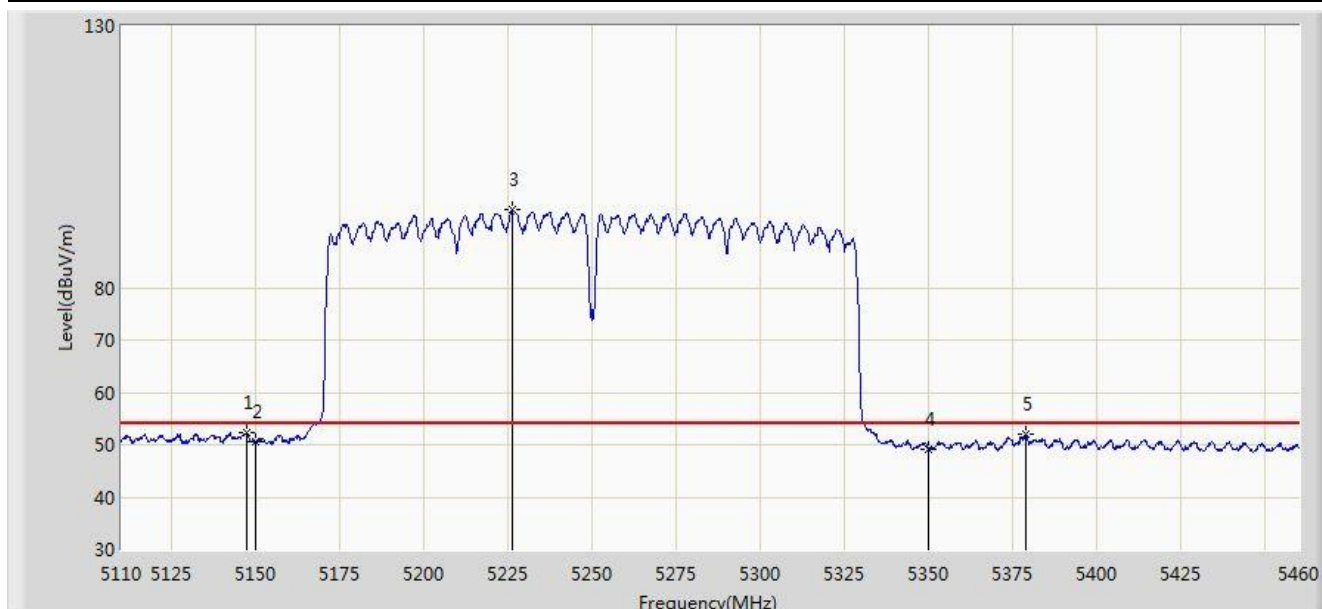


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.450	52.445	48.269	-1.555	54.000	4.176	AV
2			5150.000	50.693	46.524	-3.307	54.000	4.170	AV
3		*	5226.025	94.861	90.940	N/A	N/A	3.921	AV
4			5350.000	49.267	45.362	-4.733	54.000	3.904	AV
5			5378.975	51.922	47.965	-2.078	54.000	3.957	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

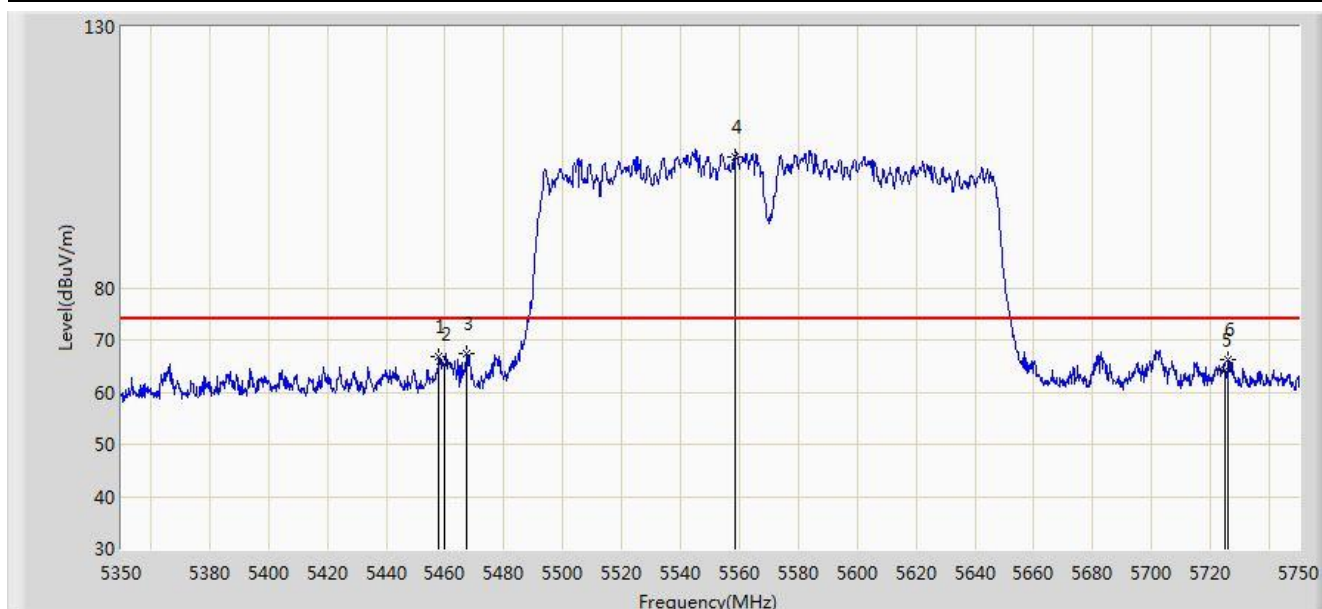


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.000	66.834	62.658	-7.166	74.000	4.176	PK
2			5460.000	65.268	61.088	-8.732	74.000	4.180	PK
3			5467.400	67.386	63.189	-0.814	68.200	4.196	PK
4		*	5558.400	105.146	100.707	N/A	N/A	4.439	PK
5			5725.000	64.136	59.107	-9.864	74.000	5.029	PK
6			5726.000	66.187	61.152	-7.813	74.000	5.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

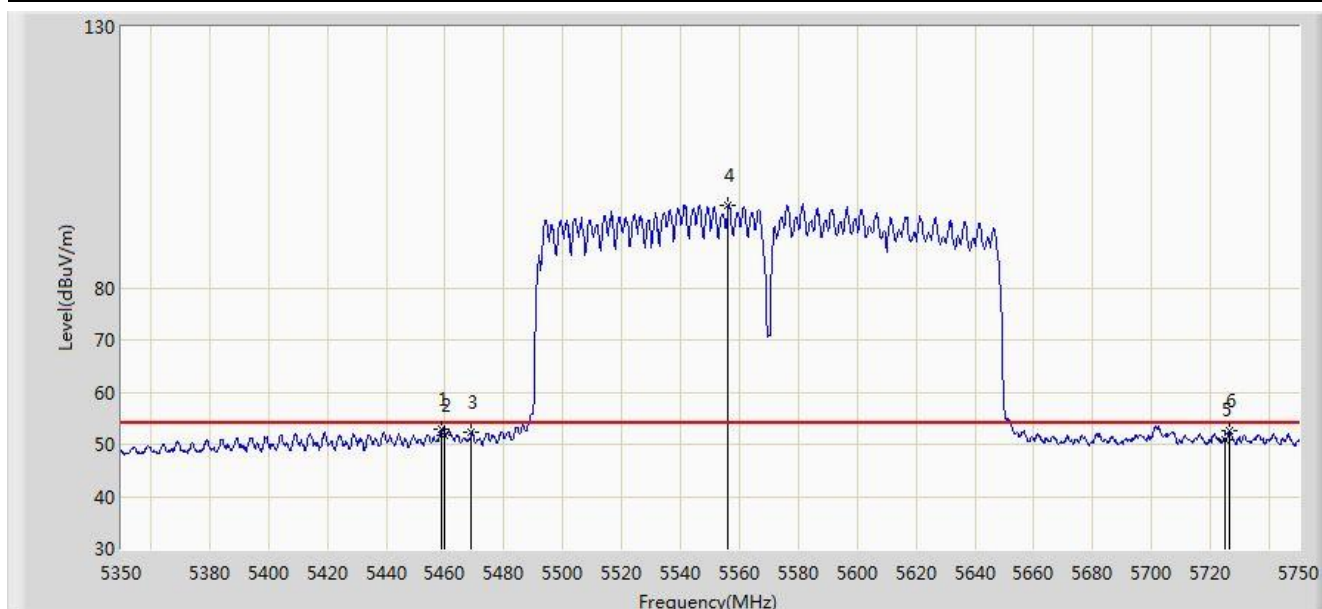


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.000	53.038	48.860	-0.962	54.000	4.178	AV
2			5460.000	51.624	47.444	-2.376	54.000	4.180	AV
3			5469.000	52.382	48.182	-1.618	54.000	4.200	AV
4		*	5556.200	95.854	91.419	N/A	N/A	4.435	AV
5			5725.000	50.909	45.880	-3.091	54.000	5.029	AV
6			5726.600	52.570	47.531	-1.430	54.000	5.039	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

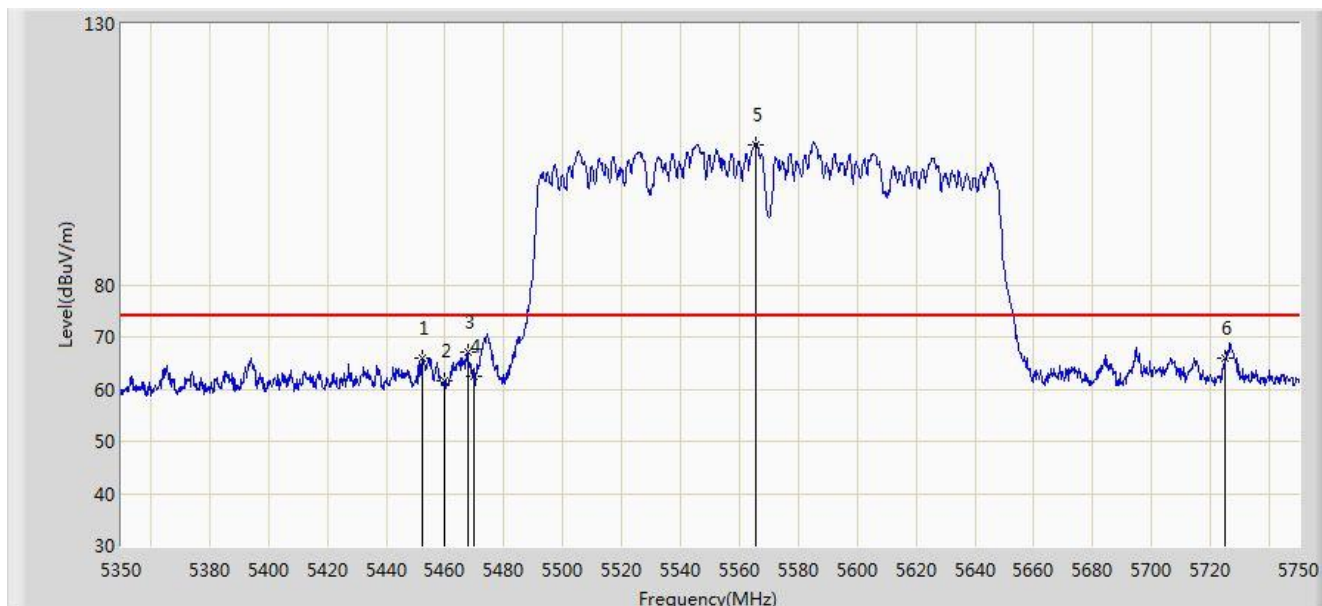


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.200	65.849	61.687	-8.151	74.000	4.161	PK
2			5460.000	61.583	57.403	-12.417	74.000	4.180	PK
3			5467.800	67.024	62.827	-1.176	68.200	4.197	PK
4			5470.000	62.354	58.152	-5.846	68.200	4.202	PK
5		*	5565.600	106.911	102.458	N/A	N/A	4.453	PK
6			5725.000	65.895	60.866	-8.105	74.000	5.029	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

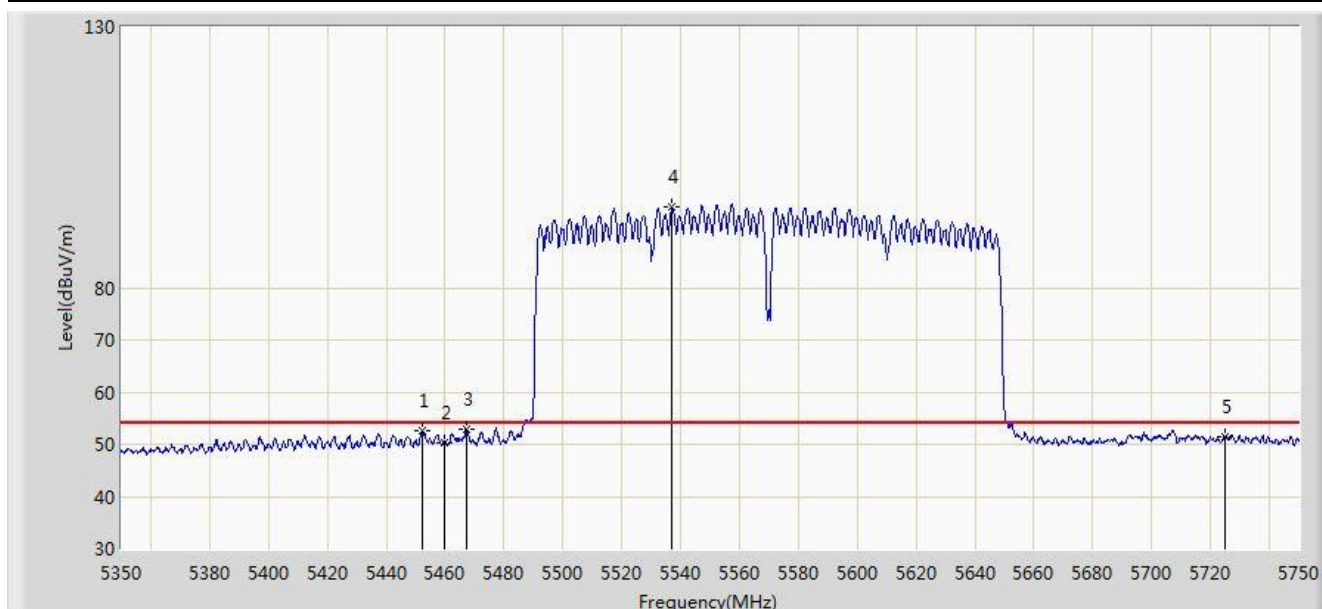


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.200	52.663	48.501	-1.337	54.000	4.161	AV
2			5460.000	50.335	46.155	-3.665	54.000	4.180	AV
3			5467.200	52.840	48.644	-1.160	54.000	4.196	AV
4		*	5537.000	95.599	91.216	N/A	N/A	4.382	AV
5			5725.000	51.418	46.389	-2.582	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

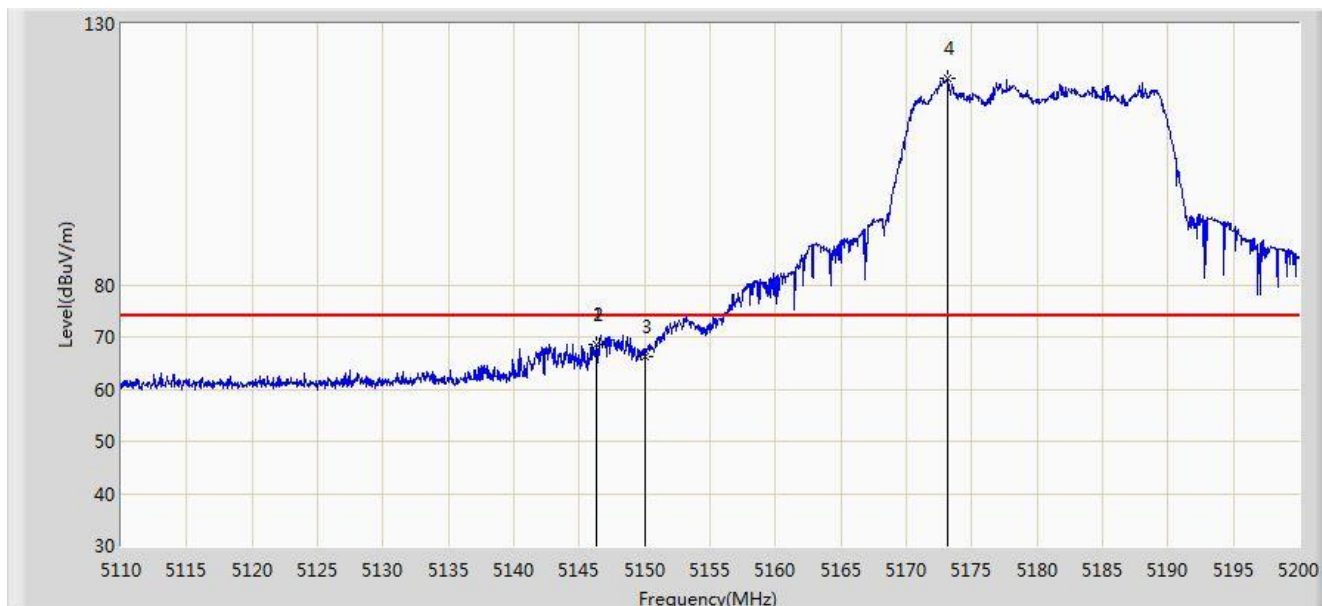


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.360	68.558	64.382	-5.442	74.000	4.176	PK
2			5146.360	68.558	64.382	-5.442	74.000	4.176	PK
3			5150.000	66.176	62.007	-7.824	74.000	4.170	PK
4		*	5173.135	119.466	115.373	N/A	N/A	4.093	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

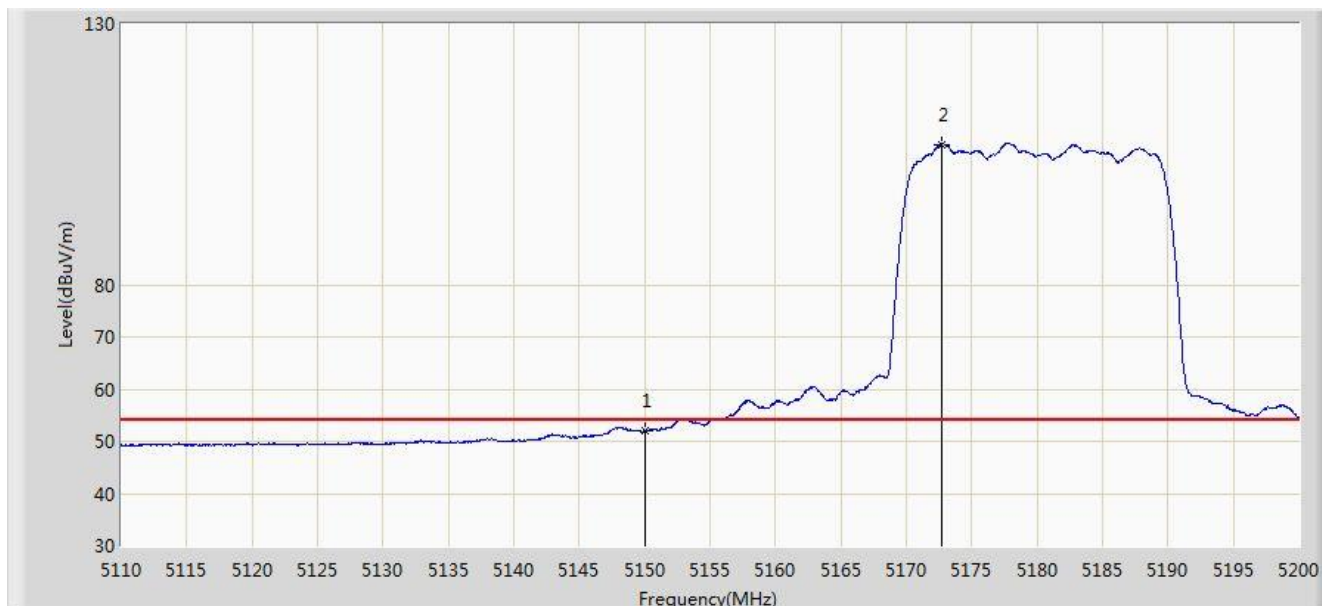


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.047	45.485	-1.953	54.000	6.562	AV
2		*	5172.685	106.883	100.381	N/A	N/A	6.502	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

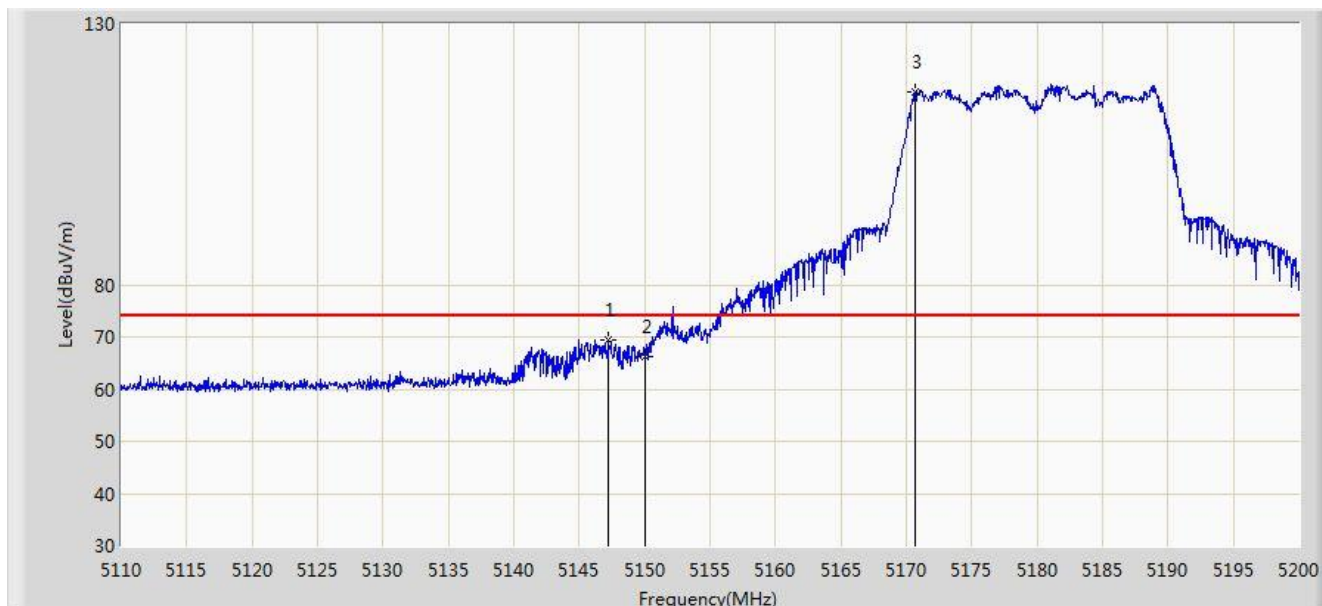


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.215	69.395	65.219	-4.605	74.000	4.176	PK
2			5150.000	66.326	62.157	-7.674	74.000	4.170	PK
3		*	5170.705	116.881	112.779	N/A	N/A	4.102	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

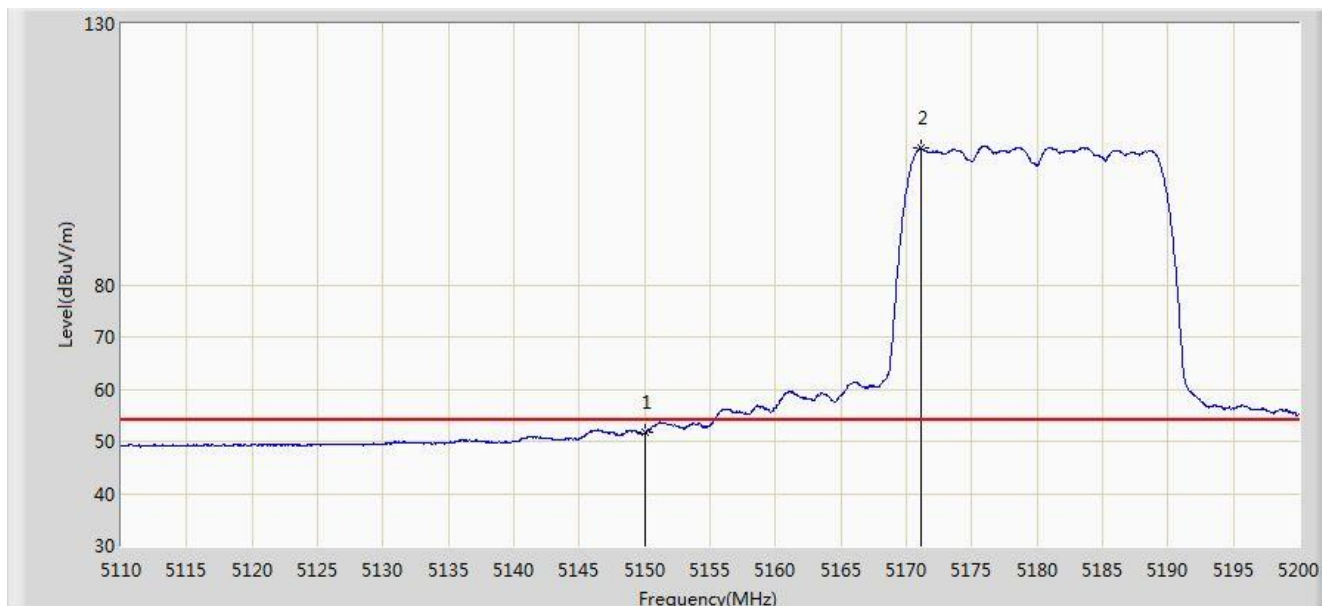


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.622	47.453	-2.378	54.000	4.170	AV
2		*	5171.110	106.152	102.052	N/A	N/A	4.101	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

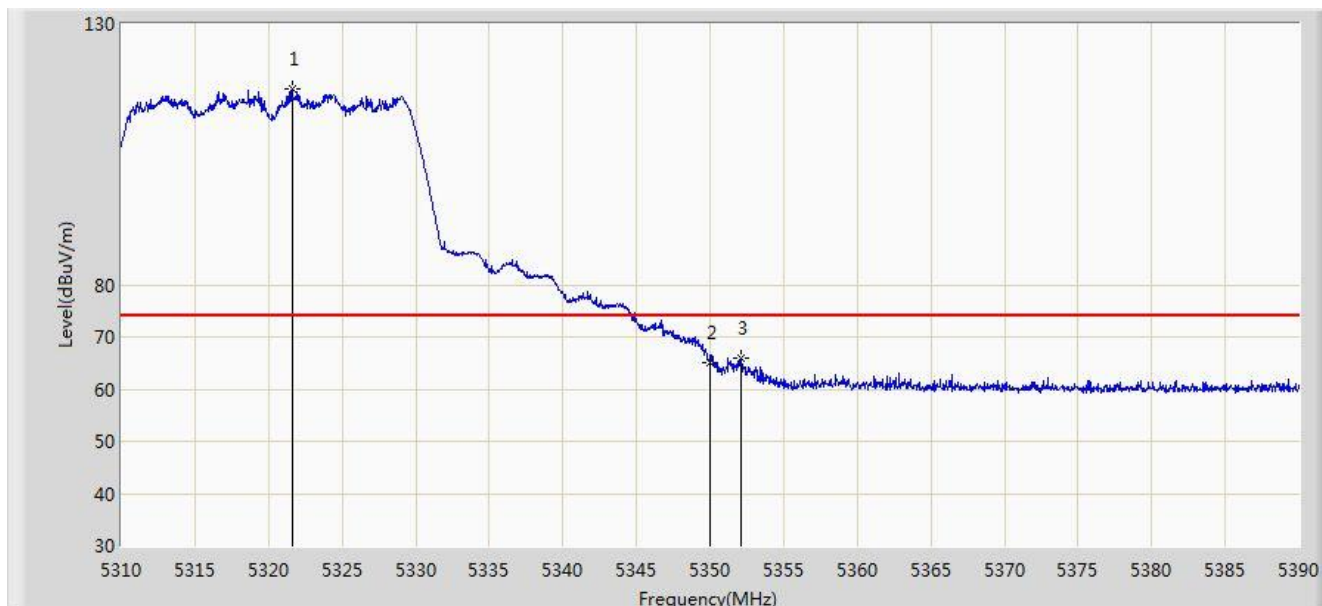


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.600	117.430	113.578	N/A	N/A	3.852	PK
2			5350.000	65.202	61.297	-8.798	74.000	3.904	PK
3			5352.120	65.994	62.085	-8.006	74.000	3.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

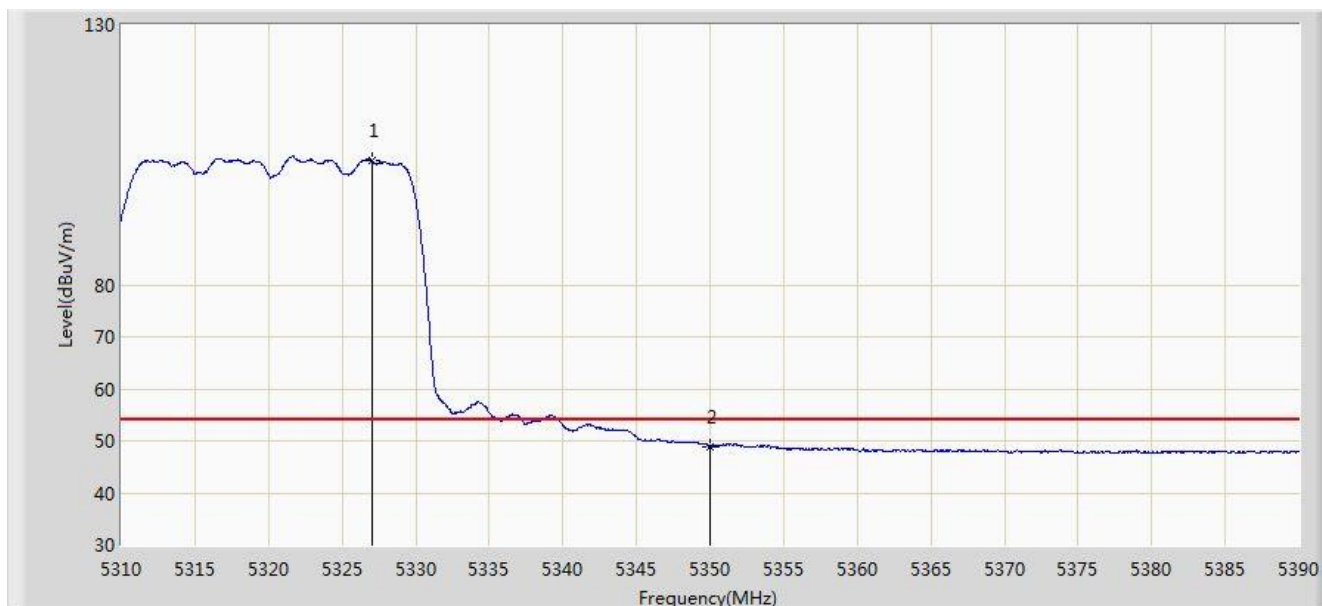


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.000	103.811	99.949	N/A	N/A	3.861	AV
2			5350.000	48.961	45.056	-5.039	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

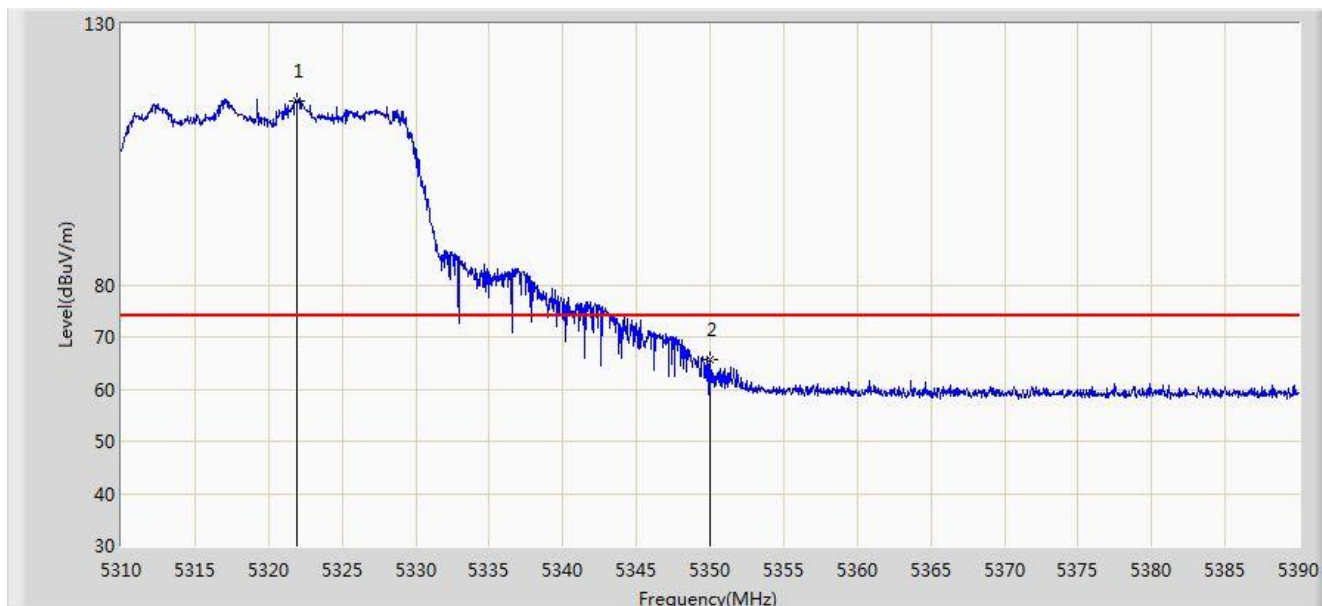


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.920	115.328	111.476	N/A	N/A	3.852	PK
2			5350.000	65.579	61.674	-8.421	74.000	3.904	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

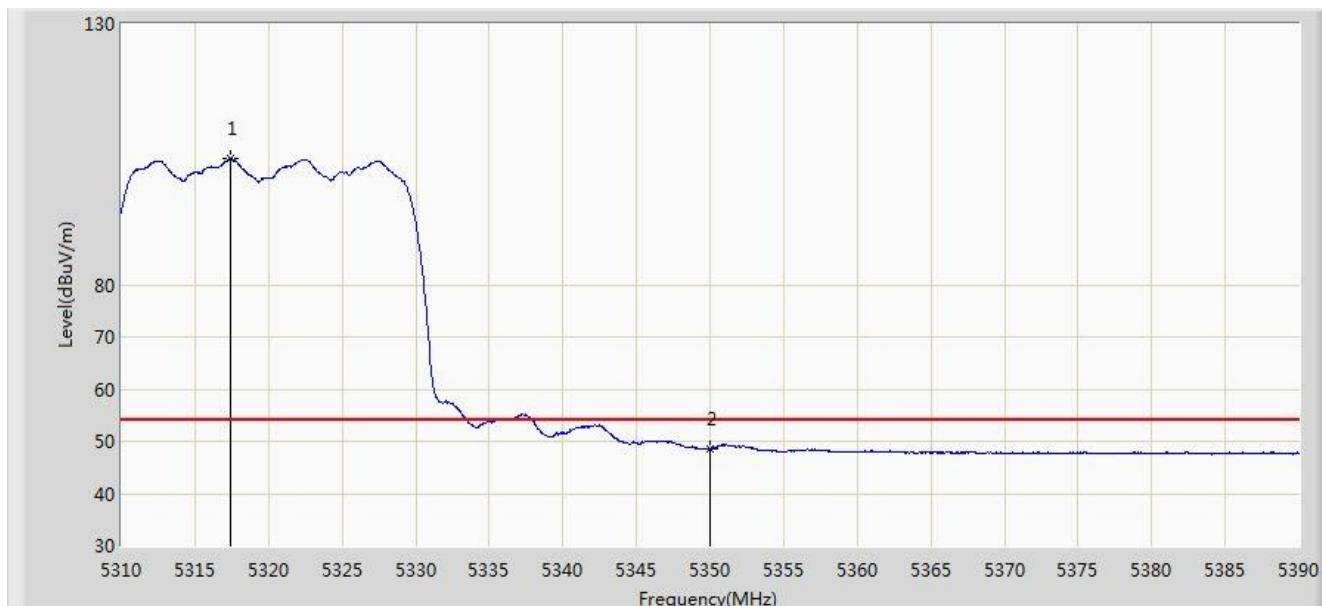


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.440	104.118	100.274	N/A	N/A	3.844	AV
2			5350.000	48.535	44.630	-5.465	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

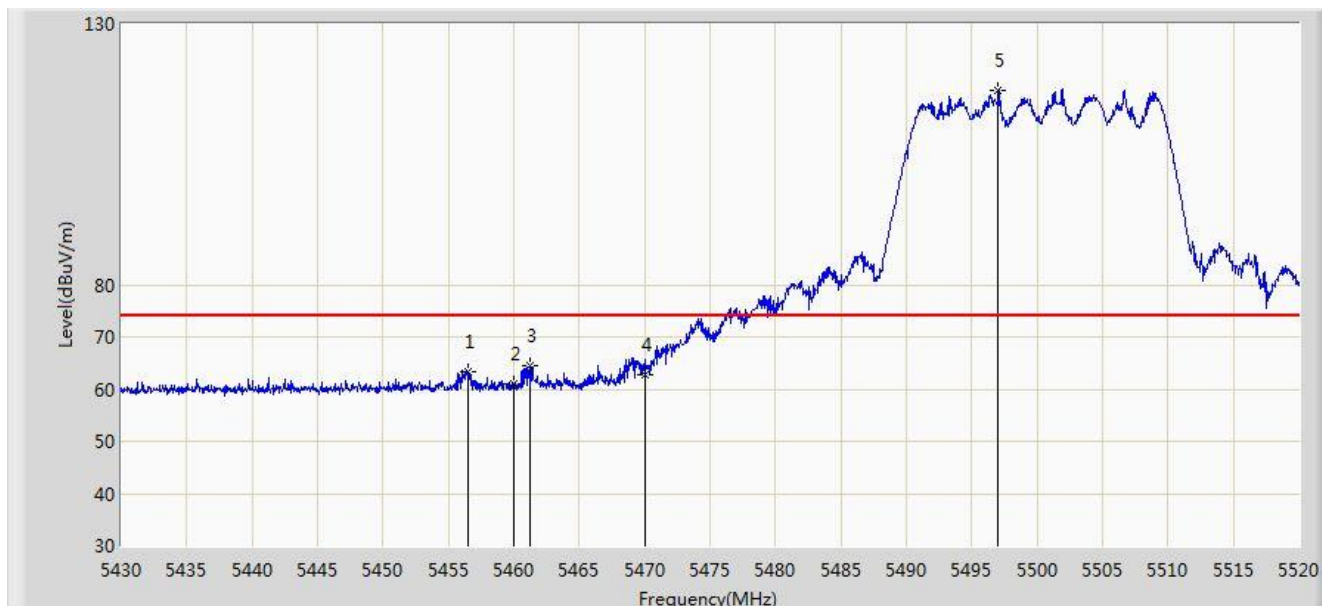


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.550	63.297	59.124	-10.703	74.000	4.173	PK
2			5460.000	60.931	56.751	-13.069	74.000	4.180	PK
3			5461.230	64.414	60.231	-3.786	68.200	4.183	PK
4			5470.000	62.811	58.609	-5.389	68.200	4.202	PK
5		*	5497.005	117.384	113.120	N/A	N/A	4.264	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

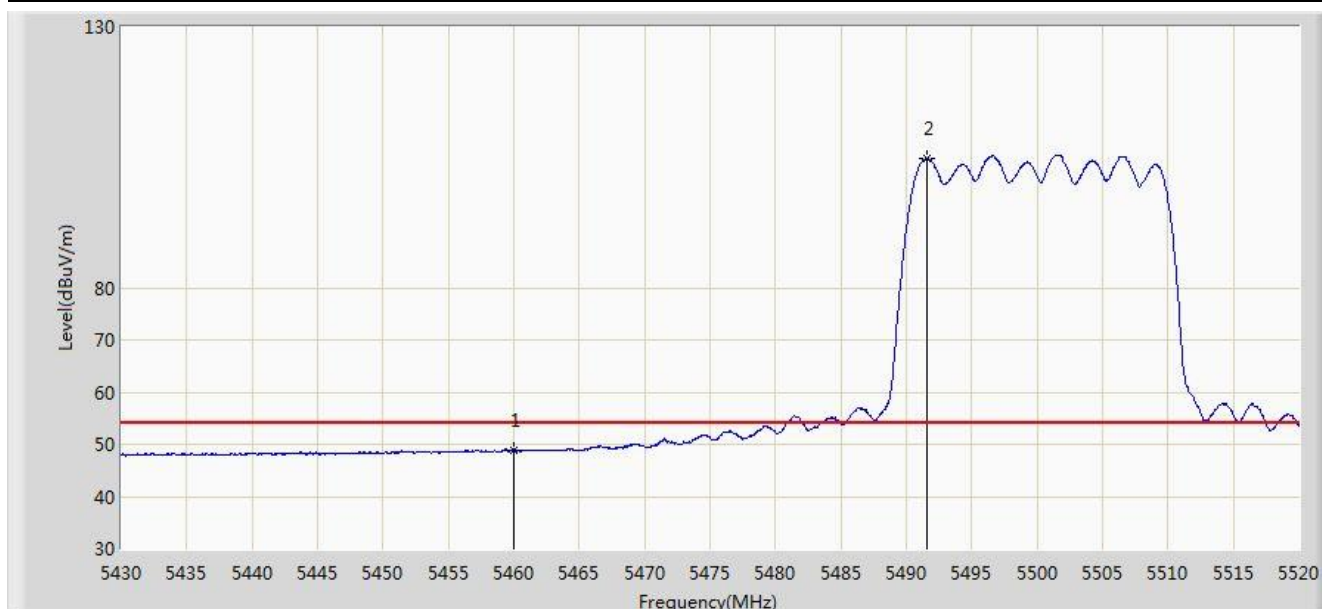


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.879	44.699	-5.121	54.000	4.180	AV
2		*	5491.560	104.757	100.506	N/A	N/A	4.252	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 03:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

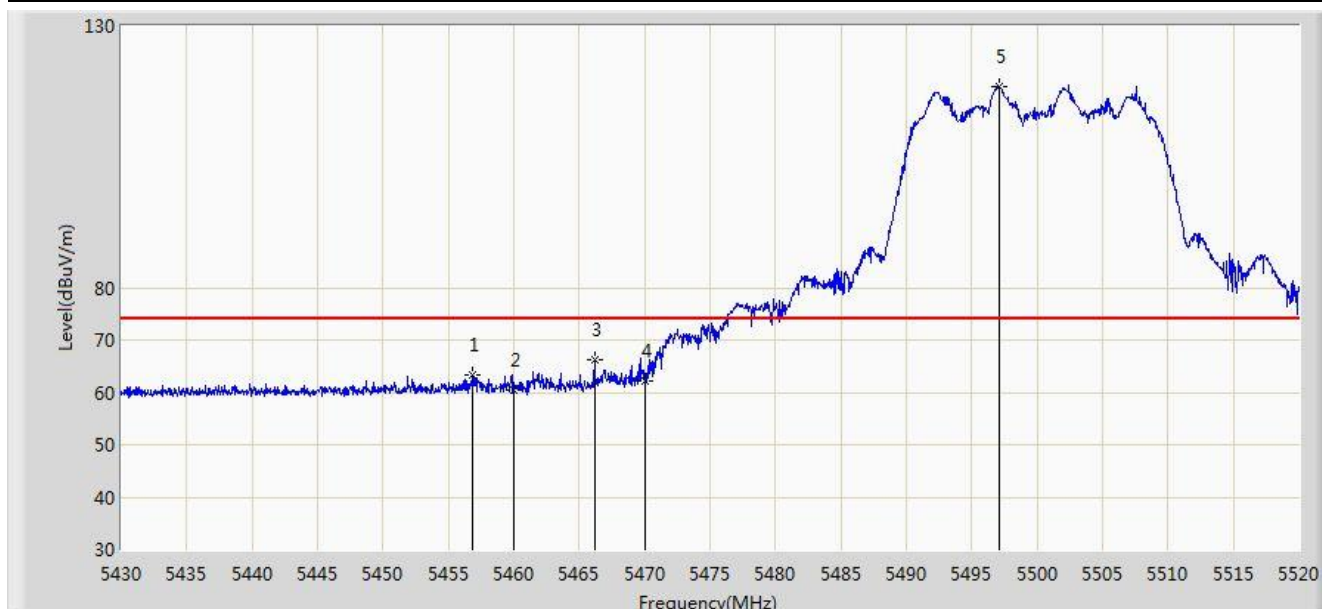


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.865	63.355	59.181	-10.645	74.000	4.173	PK
2			5460.000	60.533	56.353	-13.467	74.000	4.180	PK
3			5466.180	66.131	61.937	-2.069	68.200	4.193	PK
4			5470.000	62.047	57.845	-6.153	68.200	4.202	PK
5		*	5497.095	118.431	114.167	N/A	N/A	4.264	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

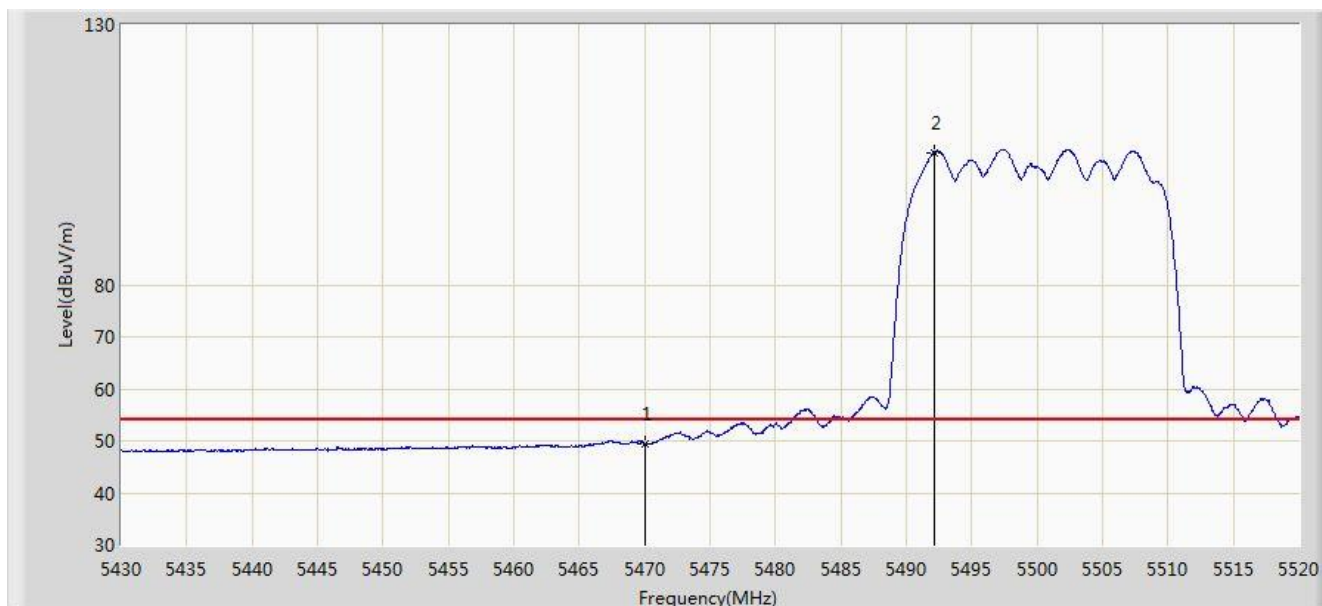


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5470.000	49.490	45.288	-4.510	54.000	4.202	AV
2		*	5492.100	105.366	101.113	N/A	N/A	4.253	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	

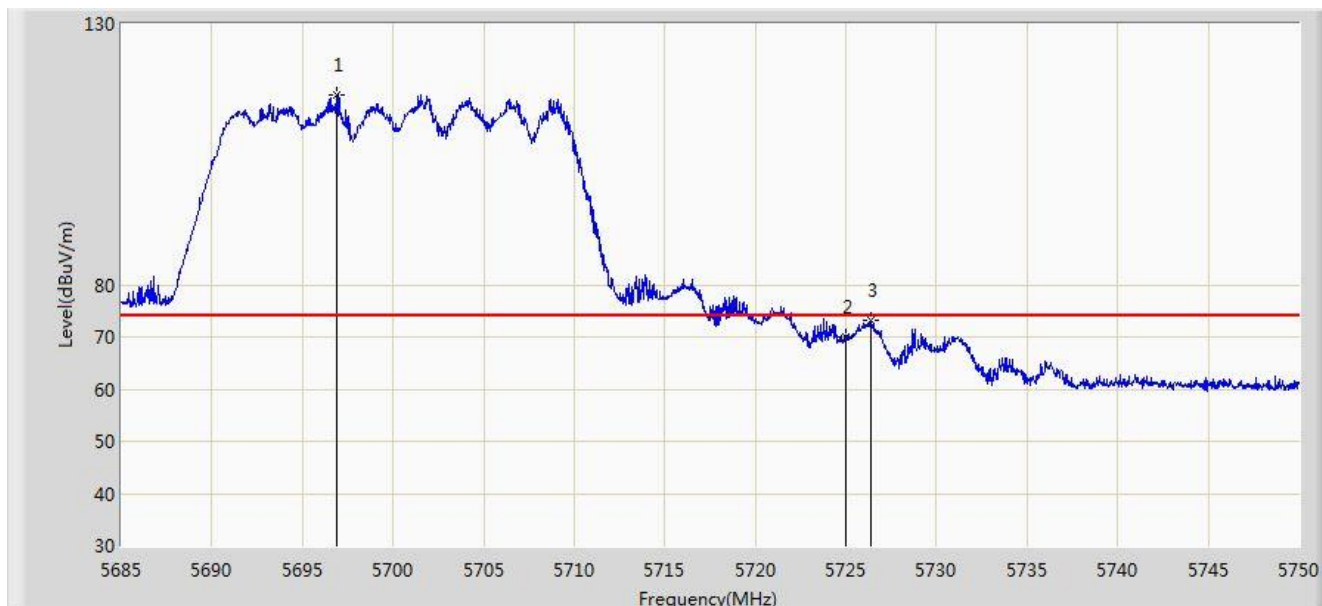


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.862	116.267	111.405	N/A	N/A	4.861	PK
2			5725.000	70.019	64.990	-3.981	74.000	5.029	PK
3			5726.340	73.261	68.223	-0.739	74.000	5.037	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	

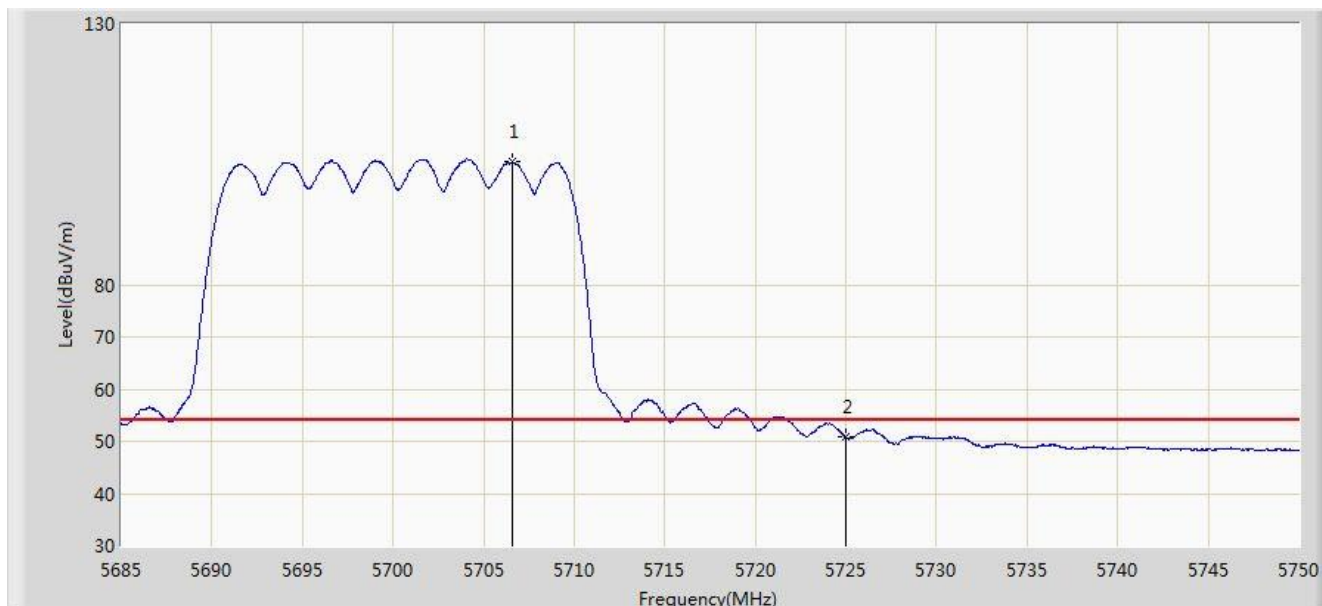


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.612	103.515	98.602	N/A	N/A	4.913	AV
2			5725.000	50.759	45.730	-3.241	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	

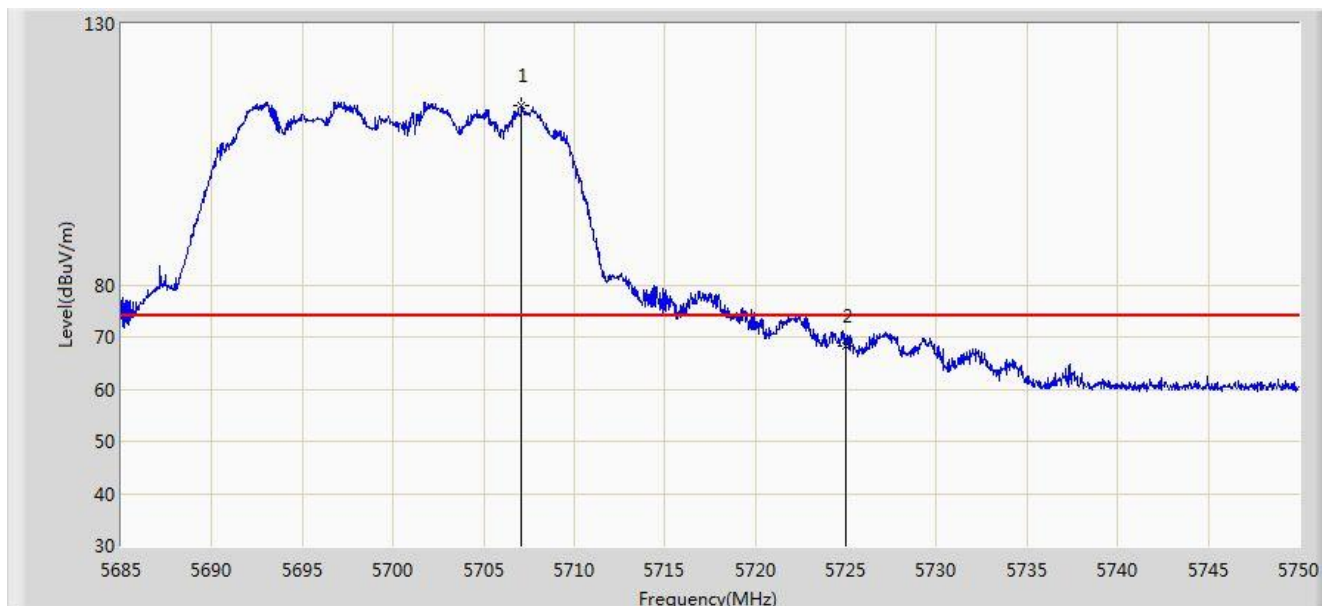


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5707.067	114.301	109.385	N/A	N/A	4.916	PK
2			5725.000	68.331	63.302	-5.669	74.000	5.029	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	

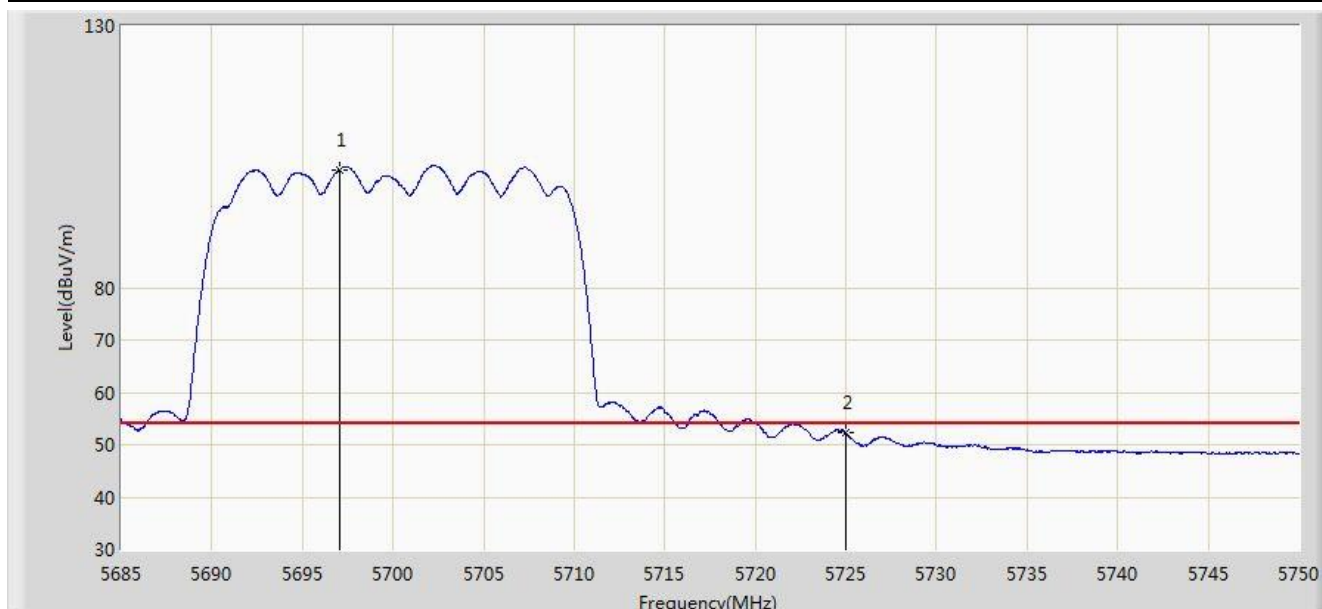


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.025	102.524	97.662	N/A	N/A	4.863	AV
2			5725.000	52.250	47.221	-1.750	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5745MHz	

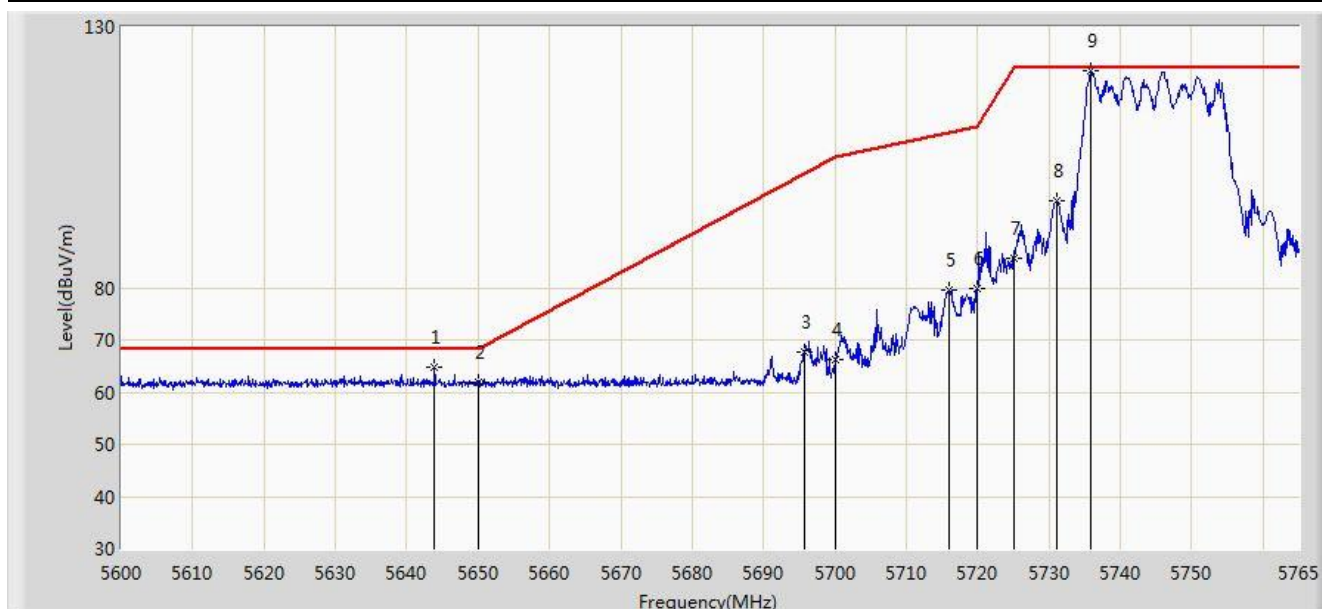


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5643.890	64.907	60.256	-3.293	68.200	4.651	PK
2			5650.000	61.861	57.190	-6.339	68.200	4.671	PK
3			5695.700	67.767	62.912	-34.263	102.031	4.855	PK
4			5700.000	66.178	61.300	-39.022	105.200	4.878	PK
5			5715.913	79.579	74.608	-30.079	109.657	4.970	PK
6			5720.000	79.819	74.822	-30.981	110.800	4.997	PK
7			5725.000	85.642	80.613	-36.558	122.200	5.029	PK
8			5731.092	96.617	91.549	-25.583	122.200	5.068	PK
9		*	5735.877	121.479	116.381	N/A	N/A	5.098	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5745MHz	

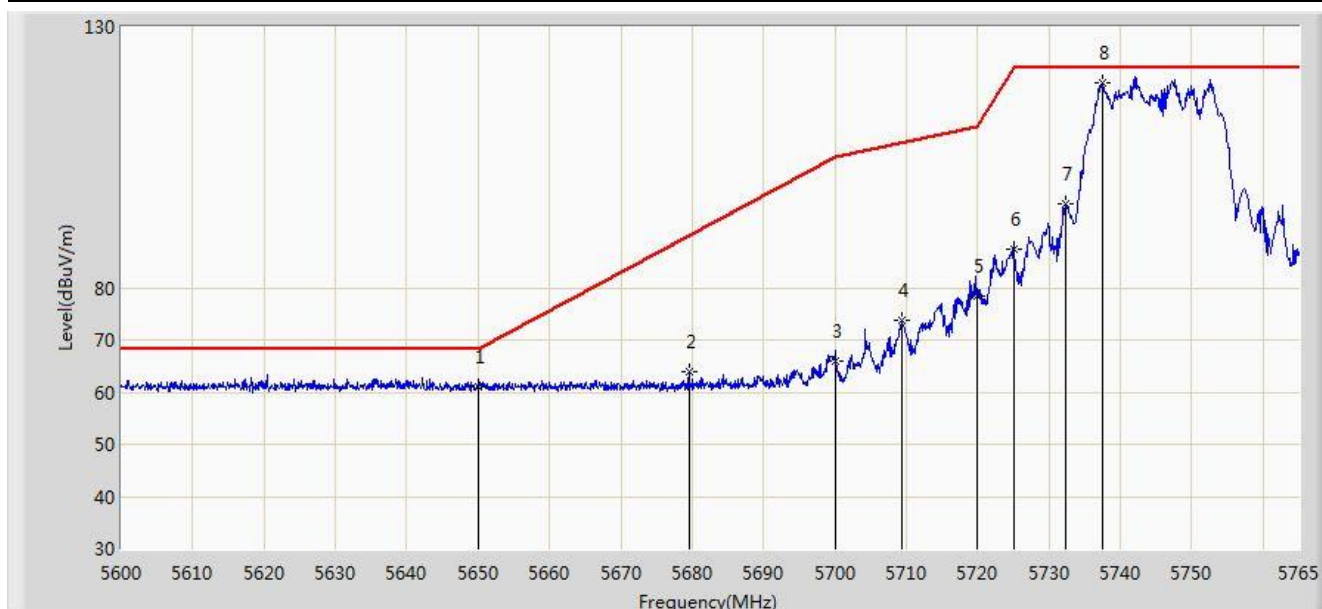


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	61.048	56.377	-7.152	68.200	4.671	PK
2			5679.530	63.905	59.120	-26.186	90.092	4.785	PK
3			5700.000	65.867	60.989	-39.333	105.200	4.878	PK
4			5709.395	73.821	68.892	-34.012	107.833	4.929	PK
5			5720.000	78.393	73.396	-32.407	110.800	4.997	PK
6			5725.000	87.525	82.496	-34.675	122.200	5.029	PK
7			5732.248	96.109	91.034	-26.091	122.200	5.076	PK
8		*	5737.527	119.247	114.138	N/A	N/A	5.108	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5825MHz	

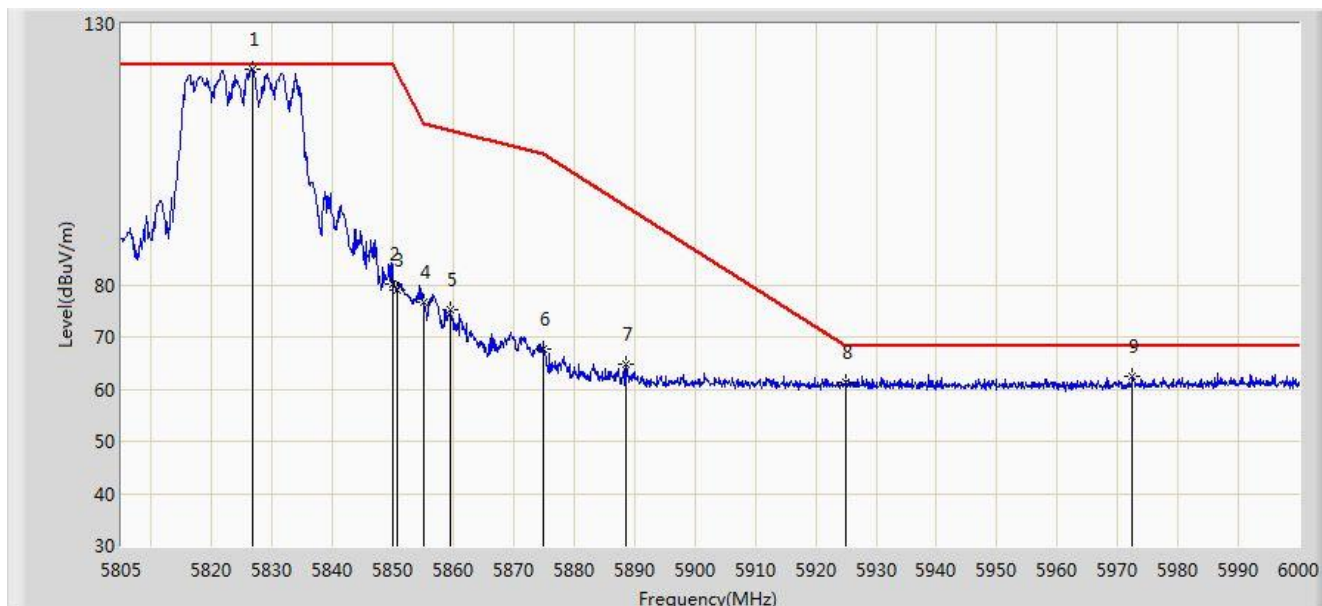


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5826.743	121.183	115.585	N/A	N/A	5.599	PK
2			5850.000	80.114	74.388	-42.086	122.200	5.726	PK
3			5850.728	78.969	73.240	-41.571	120.540	5.729	PK
4			5855.000	76.740	70.994	-34.060	110.800	5.746	PK
5			5859.502	75.222	69.457	-34.316	109.538	5.765	PK
6			5875.000	67.549	61.729	-37.651	105.200	5.820	PK
7			5888.460	64.646	58.780	-30.563	95.209	5.866	PK
8			5925.000	61.407	55.441	-6.793	68.200	5.967	PK
9			5972.505	62.527	56.462	-5.673	68.200	6.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 04:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5825MHz	

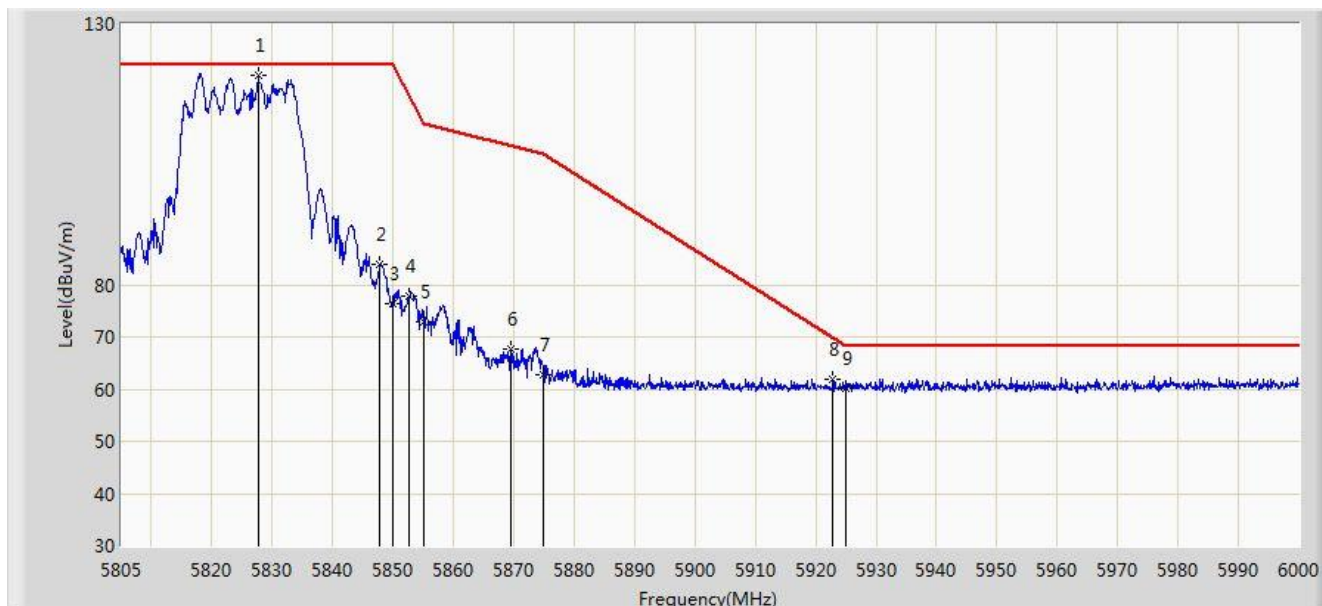


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5827.620	120.061	114.458	N/A	N/A	5.603	PK
2			5847.803	84.042	78.326	-38.158	122.200	5.716	PK
3			5850.000	76.421	70.695	-45.779	122.200	5.726	PK
4			5852.580	77.789	72.053	-38.527	116.316	5.736	PK
5			5855.000	72.874	67.128	-37.926	110.800	5.746	PK
6			5869.545	67.673	61.872	-39.052	106.726	5.801	PK
7			5875.000	62.891	57.071	-42.309	105.200	5.820	PK
8			5922.877	61.862	55.901	-7.902	69.765	5.962	PK
9			5925.000	60.181	54.215	-8.019	68.200	5.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5190MHz	

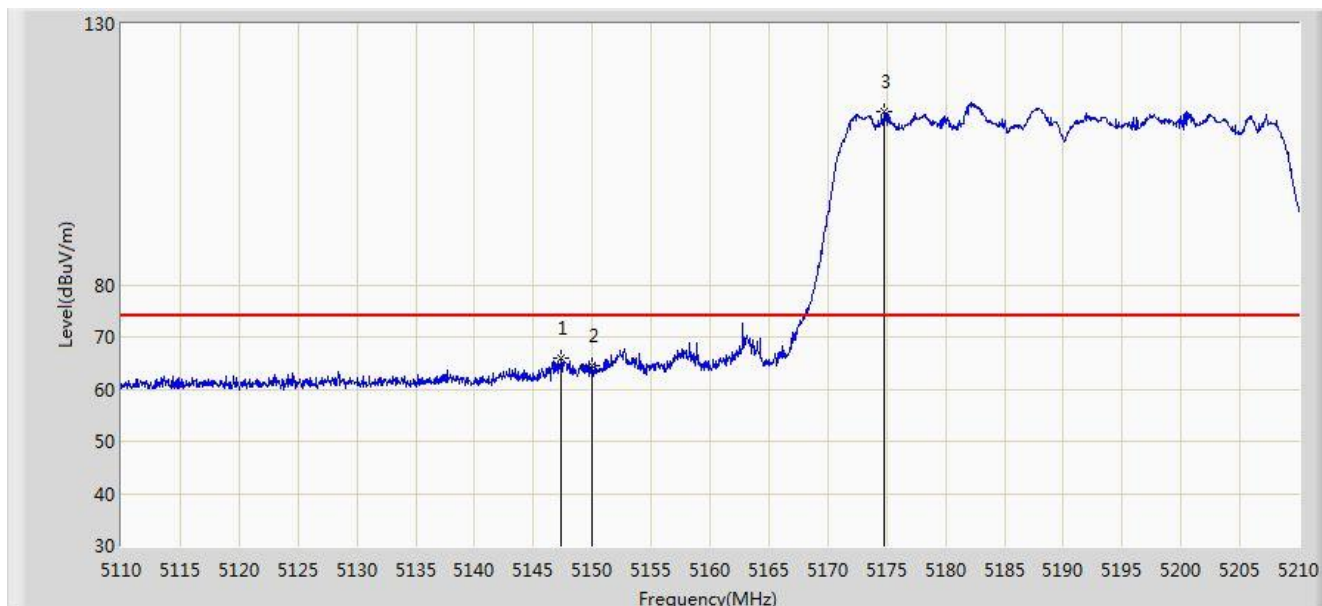


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.400	65.965	61.789	-8.035	74.000	4.175	PK
2			5150.000	64.583	60.414	-9.417	74.000	4.170	PK
3		*	5174.750	113.086	108.999	N/A	N/A	4.088	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5190MHz	

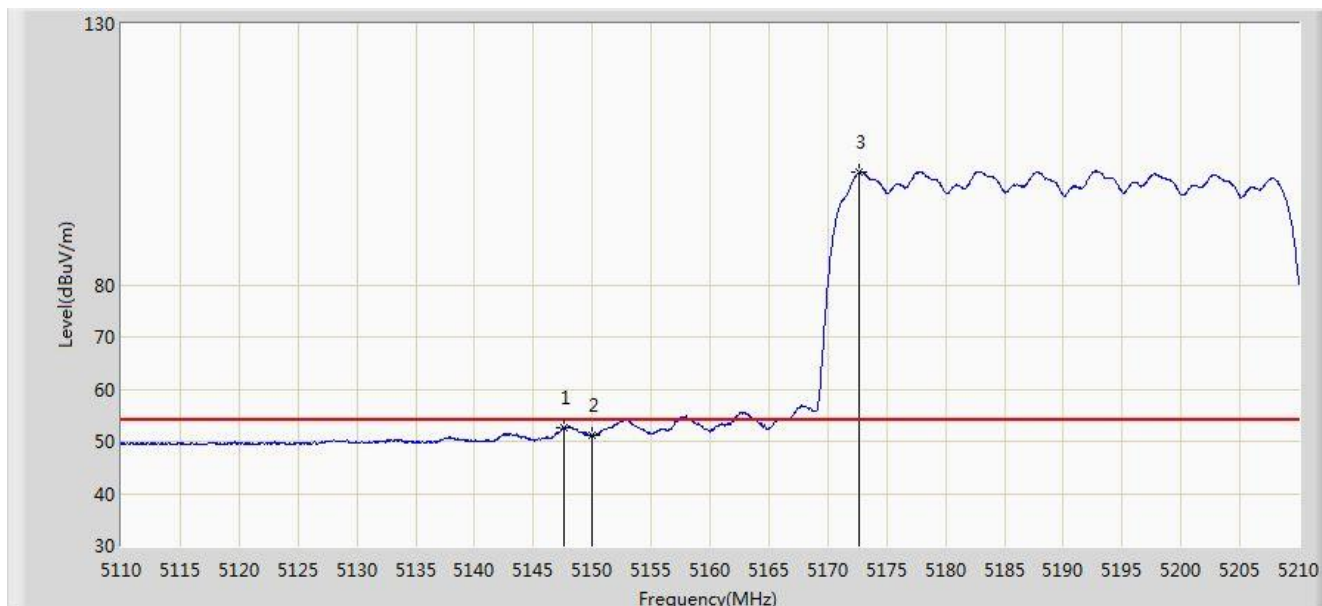


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.600	52.533	48.357	-1.467	54.000	4.176	AV
2			5150.000	51.164	46.995	-2.836	54.000	4.170	AV
3		*	5172.600	101.467	97.372	N/A	N/A	4.095	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5190MHz	

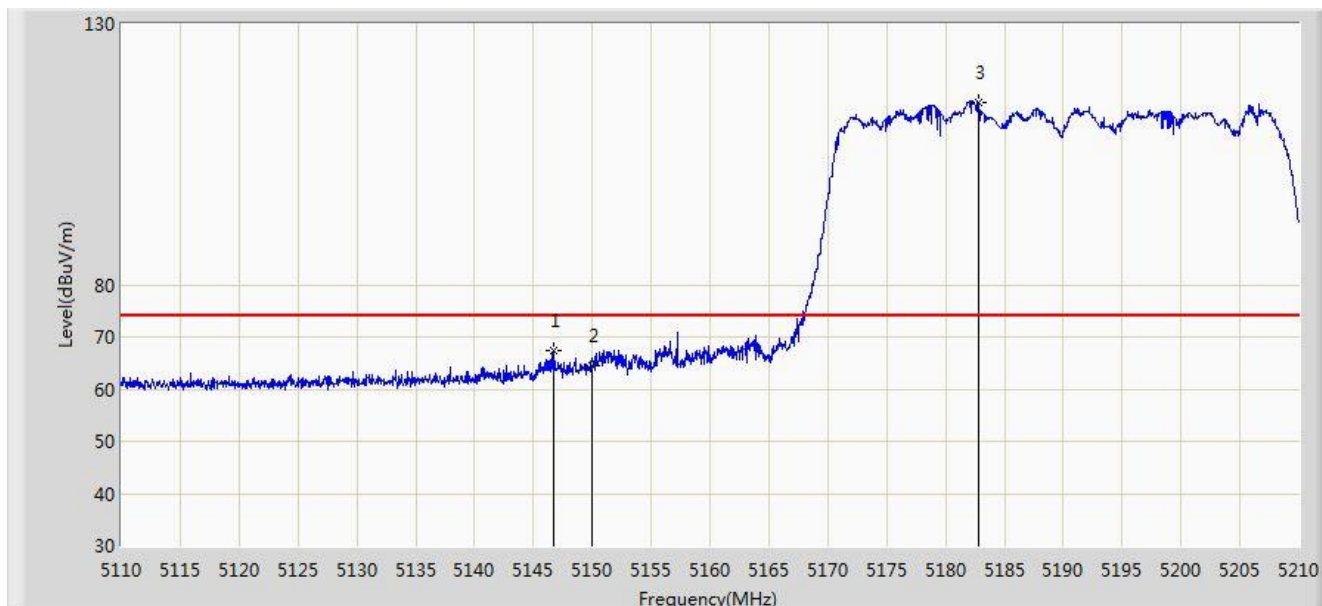


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.700	67.443	63.267	-6.557	74.000	4.176	PK
2			5150.000	64.598	60.429	-9.402	74.000	4.170	PK
3		*	5182.750	115.052	110.993	N/A	N/A	4.059	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5190MHz	

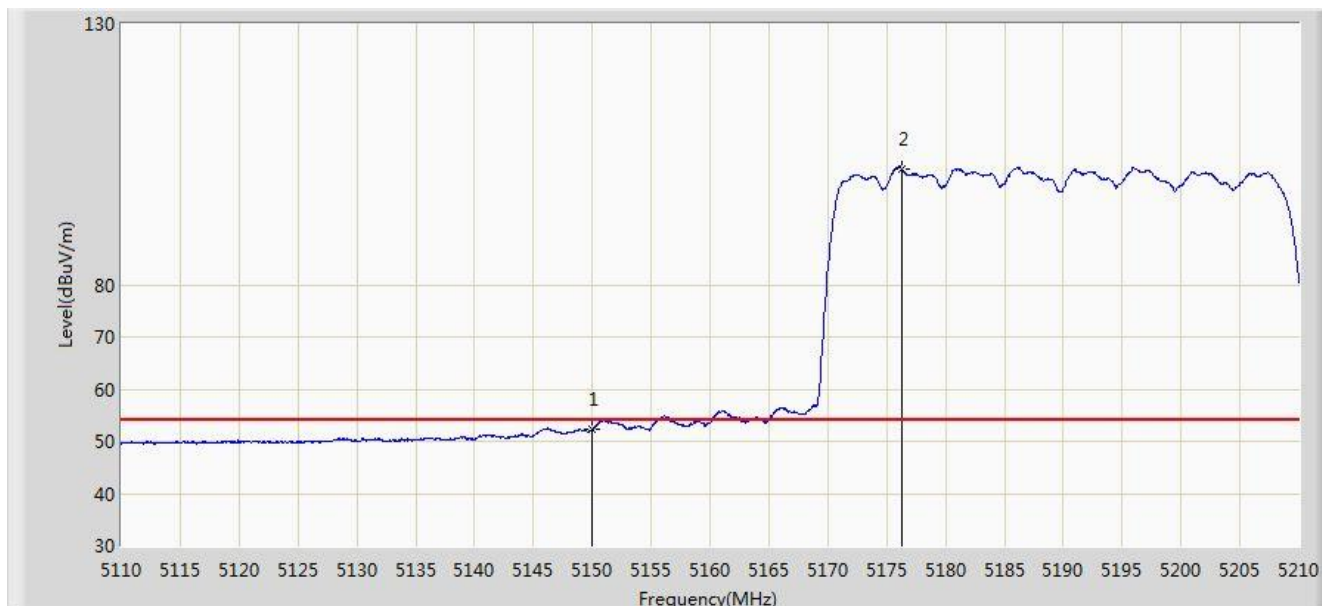


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.357	48.188	-1.643	54.000	4.170	AV
2		*	5176.350	102.207	98.125	N/A	N/A	4.081	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5310MHz	

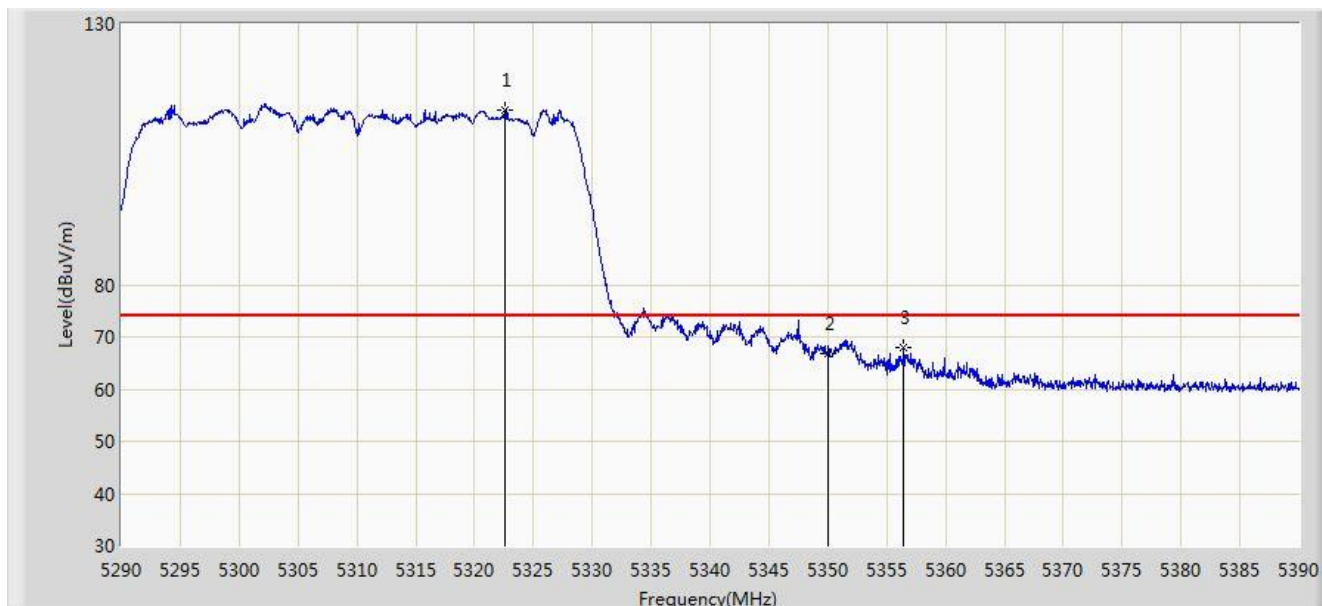


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.600	113.406	109.552	N/A	N/A	3.853	PK
2			5350.000	66.675	62.770	-7.325	74.000	3.904	PK
3			5356.450	67.900	63.984	-6.100	74.000	3.917	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5310MHz	

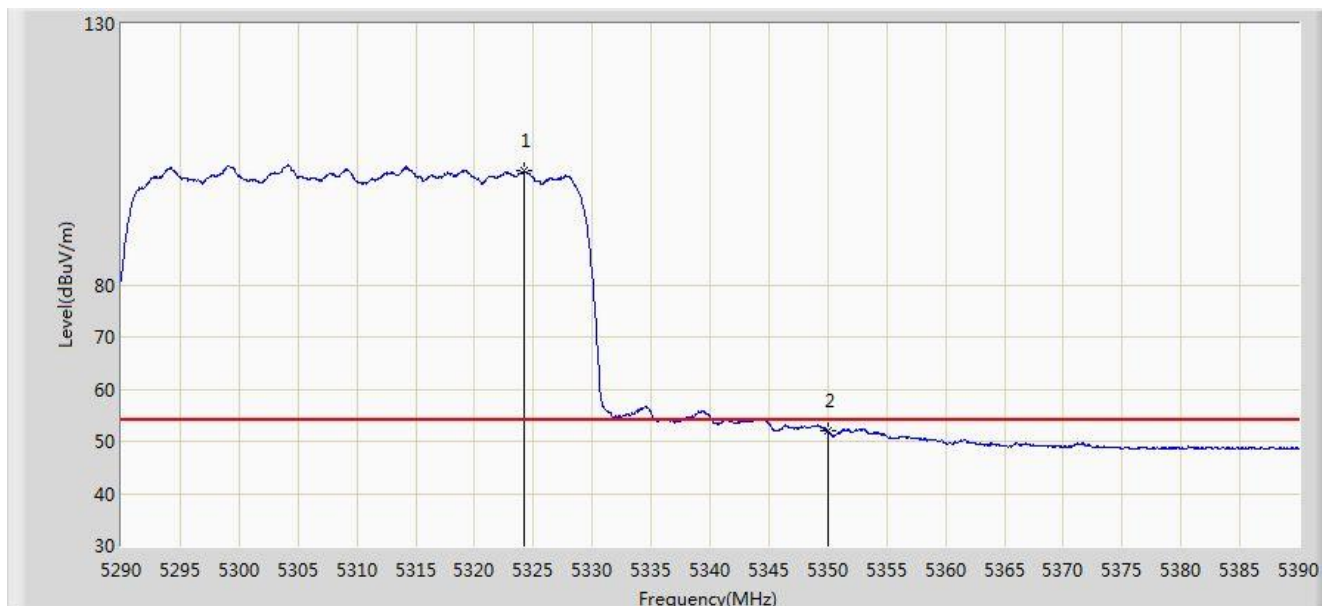

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.150	101.744	97.888	N/A	N/A	3.857	AV
2			5350.000	52.027	48.122	-1.973	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)