



427 West 12800 South
Draper, UT 84020

Test Report Certification

FCC ID	SWX-U6EXTR
Equipment Under Test	無線存取點
Model Number	U6-Extender
Test Report Serial Number	TR6357_01
Date of Test(s)	12 - 19 July and 5 August 2021
Report Issue Date	30 August 2021

Test Specification	Applicant	
47 CFR FCC Part 15, Subpart C RSS-247 Issue 2 LP0002 July 1 2020 Section 5.7.1	Ubiquiti Inc. 685 Third Avenue New York, NY 10019	香港商優比快科技有限公司台灣分公司 台北市信義區松仁路107號12樓



NVLAP LAB CODE 600241-0

Certification of Engineering Report

This report has been prepared by Unified Compliance Laboratory (UCL) to document compliance of the device described below with the requirement of Federal Communication Commissions (FCC) Part 15, Subpart E. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

Applicant	Ubiquiti Inc. / 香港商優比快科技有限公司台灣分公司
Manufacturer	Ubiquiti Inc.
Brand Name	UBQUITI
Equipment Under Test	無線存取點
Model Number	U6-Extender
FCC ID	SWX-U6EXTR
IC ID	6545A-U6EXTR

On this 30th day of August 2021, I individually and for Unified Compliance Laboratory certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge and are made in good faith.

Although NVLAP has accredited the Unified Compliance Laboratory testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. federal government.

Unified Compliance Laboratory



Written By: Alan Kitchen



Reviewed By: Joseph W. Jackson

Revision History		
Revision	Description	Date
01	Original Report Release	30 August 2021

Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT	6
2.2	Description of EUT	6
2.3	EUT and Support Equipment	7
2.4	Interface Ports on EUT	7
2.5	Operating Environment.....	8
2.6	Operating Modes.....	8
2.7	EUT Exercise Software.....	8
2.8	Block Diagram of Test Configuration	9
2.9	Modification Incorporated/Special Accessories on EUT.....	9
2.10	Deviation, Opinions Additional Information or Interpretations from Test Standard.....	9
3	Test Specification, Method and Procedures.....	10
3.1	Test Specification.....	10
3.2	Results.....	10
3.3	Test Location	11
4	Test Equipment.....	12
4.1	Conducted Emissions at Mains Ports.....	12
4.2	Direct Connect at the Antenna Port Tests.....	12
4.3	Radiated Emissions	13
4.4	Equipment Calibration	14
4.5	Measurement Uncertainty.....	14
5	Test Results.....	15
5.1	Antenna Requirements.....	15
5.2	Conducted Emissions at Mains Ports Data	15
5.3	Emissions Bandwidth.....	17
5.4	Maximum Average Output Power	18
5.5	Radiated Spurious Emissions in the Restricted Bands.....	20
5.6	Maximum Power Spectral Density	30
6	Test Setup Photos.....	32

1 Client Information

1.1 Applicant

Company	Ubiquiti, Inc. 685 Third Avenue New York, NY 10017 U.S.A.	香港商優比快科技有限公 司台灣分公司 台北市信義區松仁路 107 號 12 樓
Contact Name	Mark Feil	
Title	Compliance Manager	

1.2 Manufacturer

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Mark Feil
Title	Compliance Manager

2 Equipment Under Test (EUT)

2.1 Identification of EUT

Brand Name	UBIQUITI
Model Number	U6-Extender
Antenna Brand	Ubiquiti
Antenna Model	U6-Extender
Equipment Under Test	無線存取點
Serial Number	68D79A1F2912
Dimensions (cm)	16.9 x 11.2 x 3.2

2.2 Description of EUT

The U6-Extender is a WiFi 6 access point to increase a home or office's wireless coverage. With its dual-band design and 5.3+ Gbps aggregate throughput rate, the U6-Extender delivers strong connectivity needed to support device-dense networks. The U6-Extender includes a 5 GHz 4x4 MU-MIMO transceiver and a 2.4 GHz 2x2 MIMO transceiver. The access point fits any standard US duplex wall outlet and is powered by AC Mains power. The U6-Extender provides a Bluetooth BLE management radio to be used with the UniFi Network web application or mobile app.

The table below shows the channels used within the different modulation bandwidths.

Band	Modulation Bandwidth	Modulation Type	Frequency (MHz)
UNII-1	20 MHz	OFDM	5180, 5200, 5210, 5240
	20 MHz	HT	5180, 5200, 5210, 5240
	40 MHz	HT	5190, 5230
	20 MHz	VHT	5180, 5200, 5210, 5240
	40 MHz	VHT	5190, 5230
	80 MHz	VHT	5210
	20 MHz	HE	5180, 5200, 5210, 5240
	40 MHz	HE	5190, 5230
	80 MHz	HE	5210

This report covers the circuitry of the device subject to FCC Part 15, Subpart E. The circuitry of the device subject to FCC Part 15 Subpart B was found to be compliant and is covered under a separate Unified Compliance Laboratory test report.

2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: UniFi MN: U6-Extender SN: 68D79A1F2912	WiFi Access Point	See Section 2.4
BN: Dell MN: XPS 13 SN: N/A	Laptop PC	Shielded or Un-Shielded Cat 5e cable (Note 2)

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT

Name of Ports	No. of Ports Fitted to EUT	Cable Description/Length
AC Power	1	N/A

僅供測試用途之配件資訊 Accessories used only for supporting the tests			
名稱 Name	廠牌 Brand	型號 Model	備註 Remark
Shielded Cat 5e cable	Cable Matters	160012-BLU-8	8 meters
Shielded Cat 5e cable	Cable Matters	160012-BLU-8	8 meters
POE Power Adapter	Ubiquiti	U-POE-af	N/A
Power cord	和可	CH-1902+CHI106	N/A

2.5 Operating Environment

Power Supply	120 VAC
AC Mains Frequency	60 Hz
Temperature	24.5 – 27.8 °C
Humidity	29.1 - 54.0%
Barometric Pressure	1022 mBar

2.6 Operating Modes

The U6-Extender was tested using testing software to enable a constant transmission. The measurements within this report are corrected to reference a 100% duty cycle. All emission modes of 802.11 a/n/ac/ax were investigated. All measurements are reported with the worst-case mode (802.11ax) unless otherwise stated. The product utilizes MU-MIMO. The product was tested in its highest compliant power configuration. Where applicable, all ports are summed in the tables below. This provides highest summed amplitude per channel.

2.7 EUT Exercise Software

UniFi firmware 5.70 was used to operate the transmitter using a constant transmit mode.

2.8 Block Diagram of Test Configuration

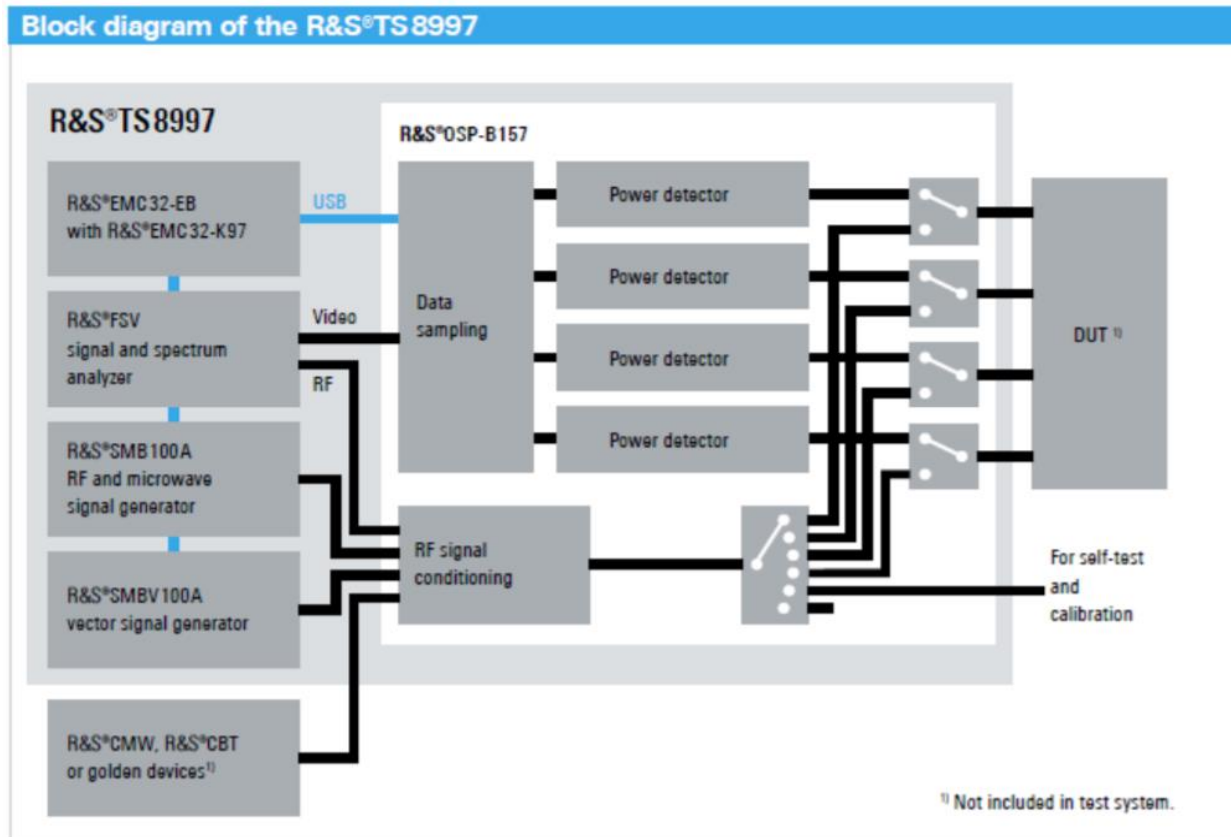


Diagram 1: Test Configuration Block Diagram

2.9 Modification Incorporated/Special Accessories on EUT

There were no modifications made to the EUT during testing to comply with the specification.

2.10 Deviation, Opinions Additional Information or Interpretations from Test Standard

There were no deviations, opinions, additional information or interpretations from the test specification.

3 Test Specification, Method and Procedures

3.1 Test Specification

Title	47 CFR FCC Part 15, Subpart E, Section 15.407 Limits and methods of measurement of radio interference characteristics of Unlicensed National Information Infrastructure Devices RSS-247 Issue 2 LP0002 July 1, 2020 Section 5.7.1
Purpose of Test	The tests were performed to demonstrate initial compliance

3.1.1 Summary of Tests

FCC Section	NCC Section	ISED Section	Environmental Phenomena	Frequency Range (MHZ)	Result
15.407(a)	5.7.3.3	SMSE-013-17	Antenna requirements	Structural Requirement	Compliant
15.407(b)	3.3	N/A	Conducted Disturbance at Mains Port	0.15 to 30	Compliant
15.407(c)	5.7.5.	N/A	Bandwidth Requirement	5150 to 5250	Compliant
15.407(e)	5.7.3.3	N/A	Peak Output Power	5150 to 5250	Compliant
15.407(f)	5.7.4	N/A	Antenna Conducted Spurious Emissions	0.009 to 40000	Compliant
15.407(g)	5.7.4, 3.6, 3.5	N/A	Radiated Spurious Emissions	0.009 to 40000	Compliant
15.407(h)	5.7.3.3(2)	N/A	Peak Power Spectral Density	5150 to 5250	Compliant
The testing was performed according to the procedures in ANSI C63.10-2013, KDB 558074, KDB 789033, KDB 662911 and 47 CFR Part 15. See test standard for details.					

3.2 Results

In the configuration tested, the EUT complied with the requirements of the specification.

3.3 Test Location

Testing was performed at the Unified Compliance Laboratory 3-Meter and 10-Meter chambers located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2022. This site has also been registered with Innovations, Science and Economic Development (ISED) department as was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2022. Unified Compliance Laboratory has been assigned Conformity Assessment Number US0223 by ISED.

4 Test Equipment

4.1 Conducted Emissions at Mains Ports

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	AFJ	FFT3010	UCL-2500	9/18/2020	9/18/2021
LISN	AFJ	LS16C/10	UCL-2512	5/26/2020	5/26/2021

Table 1:List of equipment used for Conducted Emissions Testing at Mains Port

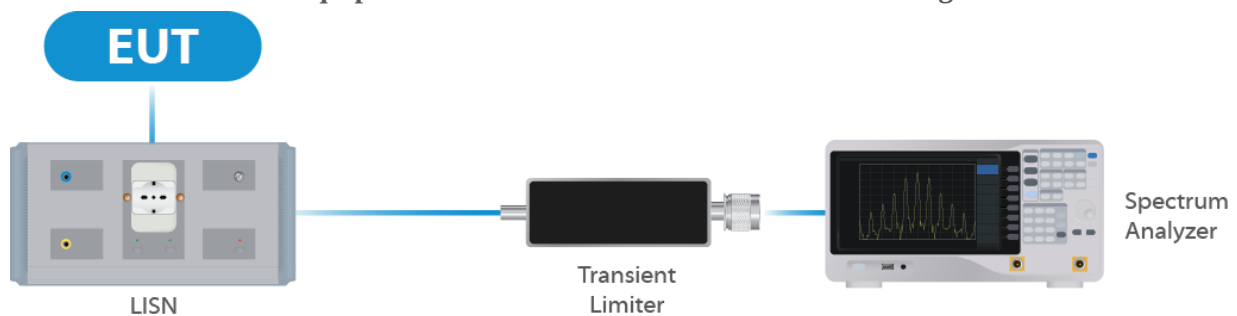


Figure 1: Conducted Emissions Test

4.2 Direct Connect at the Antenna Port Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	R&S	FSV40	UCL-2861	8/24/2020	8/24/2021
Signal Generator	R&S	SMB100A	UCL-2864	N/A	N/A
Vector Signal Generator	R&S	SMBV100A	UCL-2873	N/A	N/A
Switch Extension	R&S	OSP-B157WX	UCL-2867	9/8/2020	9/8/2021
Switch Extension	R&S	OSP-150W	UCL-2870	3/3/2021	3/3/2022

Table 2:List of equipment used for Direct Connect at the Antenna Port

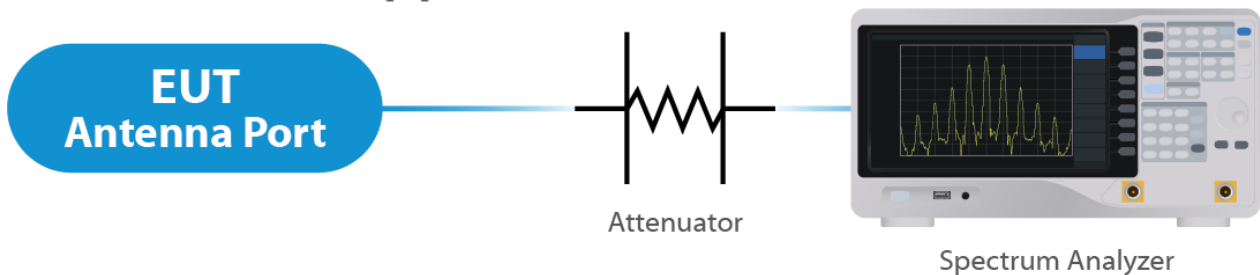


Figure 2: Direct Connect at the Antenna Port Test

4.3 Radiated Emissions

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	Keysight	N9038A	UCL-2778	6/21/2021	6/21/2022
Pre-Amplifier 9 kHz – 1 GHz	Sonoma Instruments	310N	UCL-2889	9/10/2020	9/10/2021
Double Ridge Horn Antenna	Scwarzbeck	BBHA 9120D	UCL-3065	7/8/2021	7/8/2022
Log Periodic	Scwarzbeck	STLP 9129	UCL-3068	11/16/2020	11/16/2021
15 - 40 GHz Horn Antenna	Scwarzbeck	BBHA 9170	UCL-2487	5/21/2020	5/21/2022
1 – 18 GHz Amplifier	Com-Power	PAM 118A	UCL-3833	9/29/2020	9/29/2021
Test Software	UCL	Revision 1	UCL-3108	N/A	N/A

Table 3:List of equipment used for Radiated Emissions

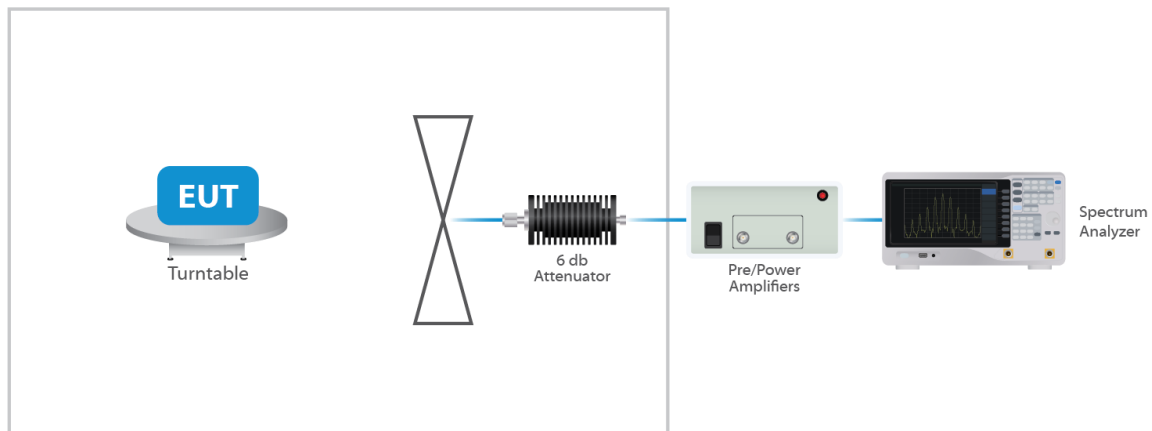


Figure 3: Radiated Emissions Test

4.4 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or Unified Compliance Laboratory personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to traceability is on file and is available for examination upon request.

4.5 Measurement Uncertainty

Test	Uncertainty ($\pm$ dB)	Confidence (%)
Conducted Emissions	1.44	95
Radiated Emissions (9 kHz to 30 MHz)	2.50	95
Radiated Emissions (30 MHz to 1 GHz)	4.38	95
Radiated Emissions (1 GHz to 18 GHz)	4.37	95
Radiated Emissions (18 GHz to 40 GHz)	3.93	95
Direct Connect Tests	K Factor	Value
Emissions Bandwidth	2	2.0%
Output Power	2	1.0 dB
Peak Power Spectral Density	2	1.3 dB
Band Edge	2	0.8 dB
Transmitter Spurious Emissions	2	1.8 dB

5 Test Results

5.1 Antenna Requirements


The EUT uses an integral antenna. The Maximum gain of the antenna is 6.0 dBi. The antenna is not user replaceable.

Results


The EUT complied with the specification

5.2 Conducted Emissions at Mains Ports Data

5.2.1 Line

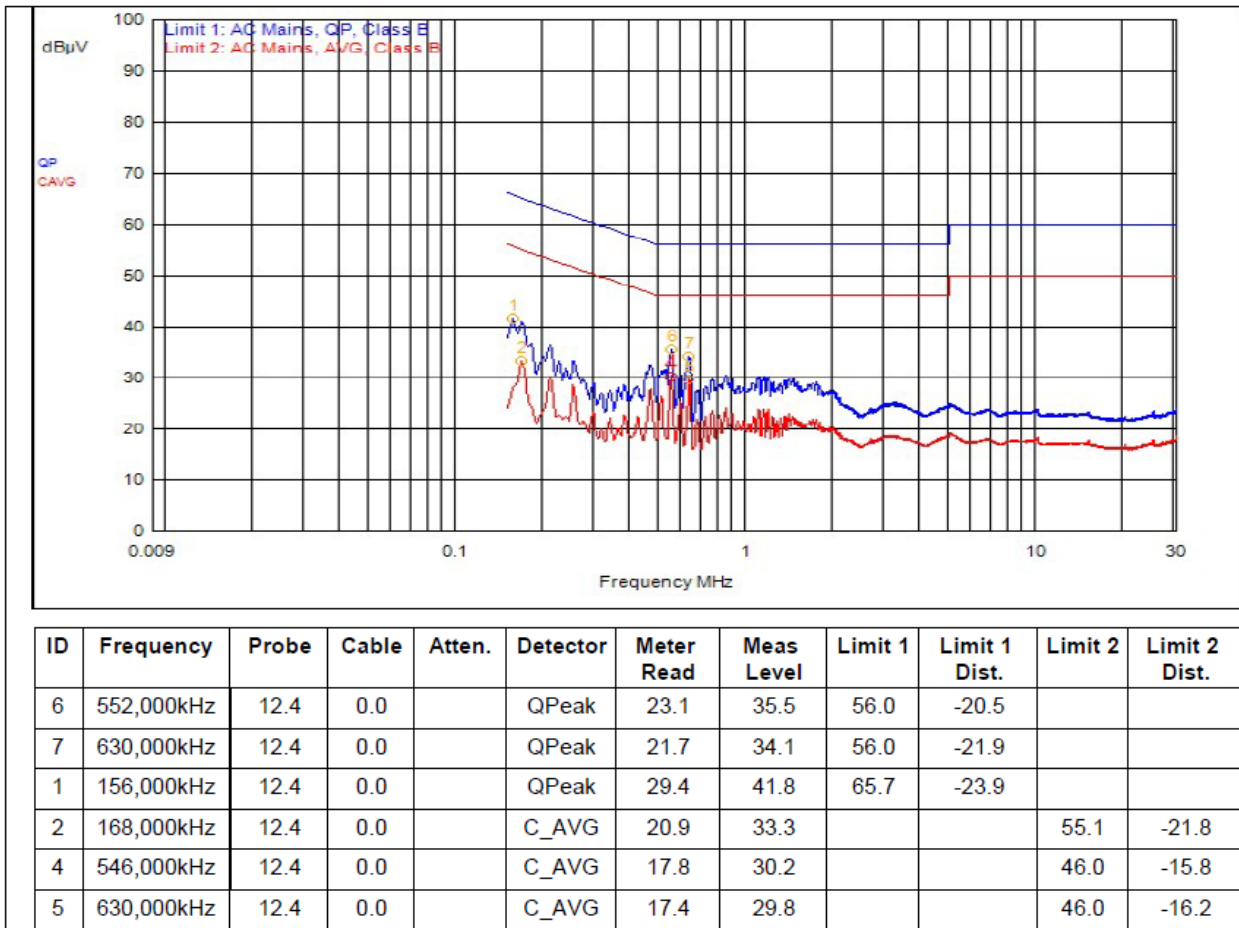

5.2.2 Neutral

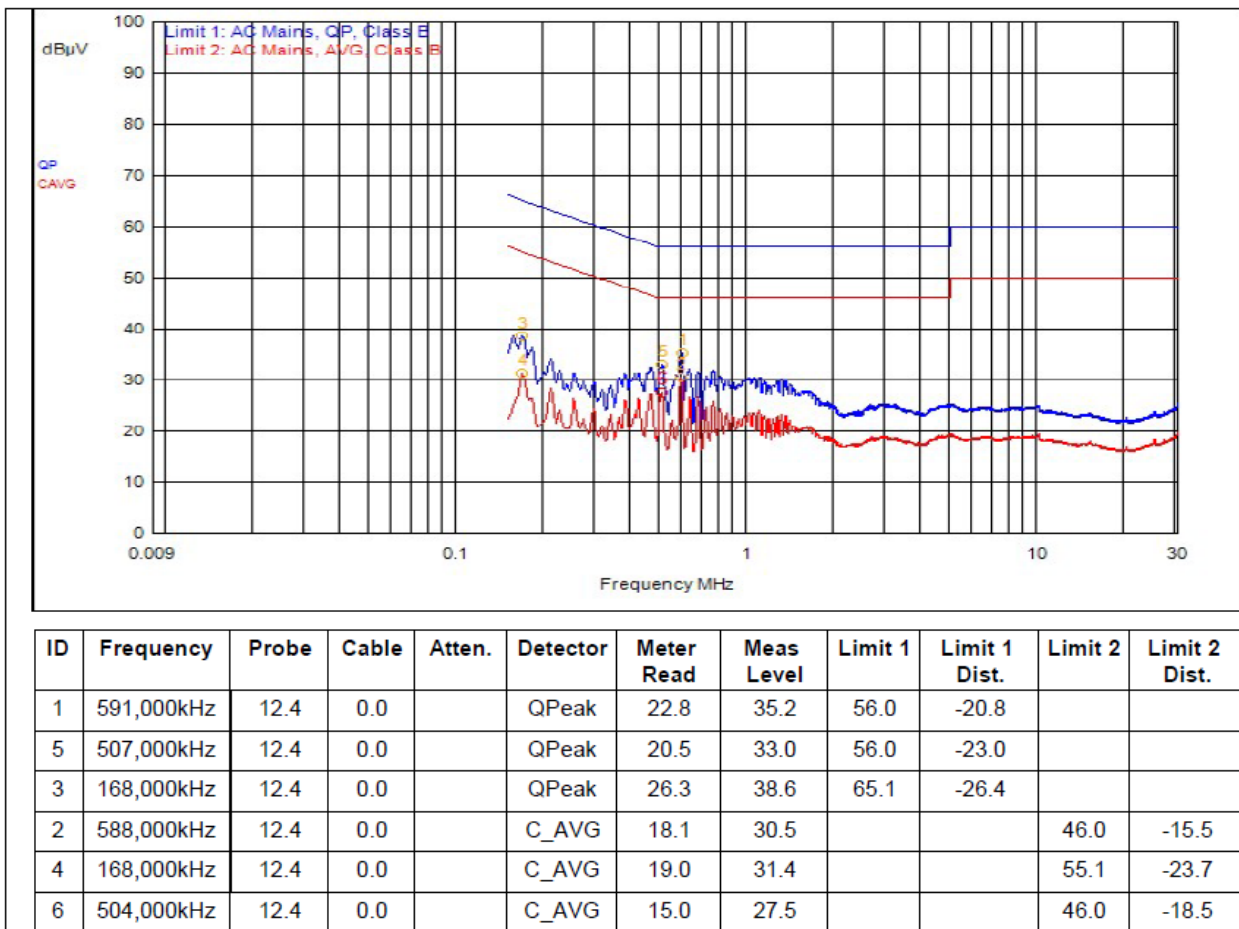

Result

The EUT complied with the specification limit.

5.3 Emissions Bandwidth

All chains were measured under the guidance of KDB 789033 Section II.C. and KDB 66291 D01. Please see associated annex for details on instrument settings.

Nominal BW (MHz)	Frequency (MHz)	99% Bandwidth (MHz)	Emissions 26 dB Bandwidth (MHz)
a20	5180	16.6	20.4
a20	5210	23.7	39.0
a20	5240	34.6	59.85
n20	5180	17.8	20.7
n20	5210	21.5	42.2
n20	5240	28.6	44.9
n40	5190	36.25	39.0
n40	5240	36.25	40.8
ac20	5180	17.7	20.8
ac20	5210	21.2	40.9
ac20	5240	28.4	46.9
ac40	5190	36.25	39.0
ac40	5230	36.25	47.55
ac80	5210	75.5	82.5
ax20	5180	19.1	21.4
ax20	5210	19.7	38.1
ax20	5240	28.6	50.2
ax40	5190	37.75	40.2
ax40	5230	38.0	46.95
ax80	5210	77.5	82.0

Result

All chains were tested and the highest bandwidth per chain is reported above.

The 26 dB bandwidths are reported for information purposes. Please see Annex for all bandwidth measurements.

5.4 Maximum Average Output Power

The maximum average RF conducted output power measured for this device was 29.28 dBm or 847.23 mW. The limit is 30 dBm, or 1 Watt when using an antenna with 6 dBi (indoor/outdoor access point) or less gain. The antenna has a gain of 6 dBi. The product utilizes MU-MIMO. The product was tested in its highest compliant power configuration and all ports are summed in the table below. This provides highest summed amplitude per channel.

For the band 5.15 GHz~5.25 GHz

(1) For outdoor access:

(A) The maximum conducted output power shall be less than or equal to 1 Watt.

(B) The maximum power spectral density shall be less than or equal to 17 dBm in any 1 MHz band.

(C) If transmitting antennas of directional gain greater than 6 dBi are used, both the
31

maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dBi that the directional gain of the antenna exceeds 6 dBi.

(D) The maximum EIRP at any elevation angle above 30 degrees as measured from the horizon shall be less than or equal to 21 dBm.

(2) For indoor access:

(A) The maximum conducted output power over the frequency band of operation shall be less than or equal to 1 Watt.

(B) The maximum power spectral density shall be less than or equal to 17 dBm in any 1 MHz band.

(C) If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dBi that the directional gain of the antenna exceeds 6 dBi.

(3) For fixed point-to-point access:

(A) The maximum conducted output power shall be less than or equal to 1 Watt.

(B) The maximum power spectral density shall be less than or equal to 17 dBm in any 1 MHz band.

(C) If transmitting antennas of directional gain greater than 23 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dBi that the directional gain of the antenna exceeds 23 dBi.

(D) Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information.

The conducted limit for PTP mode is 30 dBm

The conducted limit for PTMP mode is 30 dBm

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power	Measured PSD
OFDM 20	5180	Mcs0	38	22.85	8.88
OFDM 20	5210	Mcs0	48	27.53	13.47
OFDM 20	5240	Mcs0	52	29.28	15.08
HT 20	5180	Mcs0	40	23.38	8.04
HT 20	5210	Mcs0	48	27.44	12.11
HT 20	5240	Mcs0	50	28.49	13.17
HT 40	5190	Mcs0	30	18.9	0.67
HT 40	5230	Mcs0	43	25.57	7.25
VHT 20	5180	Mcs0	40	23.38	8.11
VHT 20	5210	Mcs0	48	27.4	12.12
VHT 20	5240	Mcs0	50	28.45	13.15
VHT 40	5190	Mcs0	30	18.88	0.67
VHT 40	5230	Mcs0	43	25.57	7.2
VHT 80	5210	Mcs0	29	18.3	-3.06
HE 20	5180	Mcs0	38	22.94	7.41
HE 20	5210	Mcs0	47	27.15	11.61
HE 20	5240	Mcs0	50	28.56	12.98
HE 40	5190	Mcs0	34	21.18	2.69
HE 40	5230	Mcs0	43	25.68	7.12
HE 80	5210	Mcs0	29	18.6	-2.88

Result

In the configuration tested, the maximum average RF output power was less than 1 watt; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots in attached Annex).

5.5 Radiated Spurious Emissions in the Restricted Bands

Due to the design of the EUT, radiated measurements are required.

All investigated emissions were subjected to the more stringent limits described below.

Additional regulations shall apply except for this standard, the emissions from the low-power radio-frequency devices shall be less than or equal the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges. The plots below are prescan data, the tabular data is final data. Worst case mode is 802.11ac, the data below reflects worst case.


$$\text{dBuV} = 20 \log(\mu\text{V})$$

$$150\mu\text{V} = 43.5 \text{ dBuV}$$

Frequency (MHz)	Field strength (micro-volts/meter)	Measurement distance (meters)
0.009 – 0.490 (included)	2,400/Freq.(kHz)	300
0.490 (excluded) – 1.705 (included)	24,000/Freq. (kHz)	30
1.705 (excluded) – 30 (excluded)	30	30
30 (included) – 88 (included)	100	3
88 (excluded) – 216 (included)	150	3
216 (excluded) – 960 (included)	200	3
Above 960 (excluded)	500	3


Result

All emissions in and outside of the restricted bands of § 15.205 met the limits specified in § 15.209 and LP0002 Section 3.5 therefore, the EUT complies with the specification. See below for band edge plots. There were no spurious emissions found between the ranges of 30 MHz – 1 GHz and 16 GHz – 40 GHz

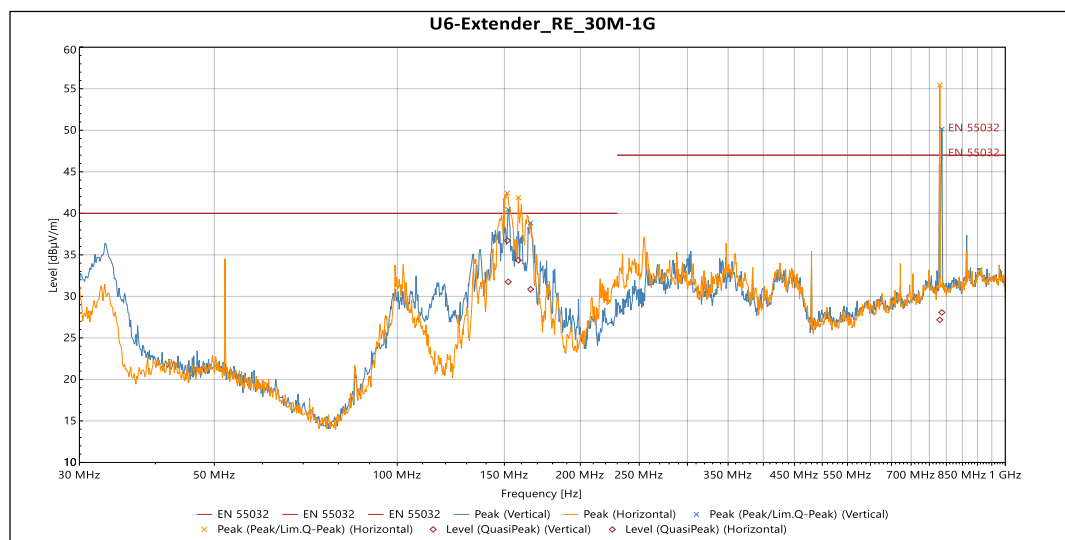

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin	Azimuth (°)	Height	Pol.	RBW	Correction (dB)
152.21 MHz	31.75	40	-8.25	203	3.73	Vertical	120000	-12.264
165.66 MHz	30.857	40	-9.143	184	2.48	Vertical	120000	-11.654
786.45 MHz	28.063	47	-18.937	136	1.795	Vertical	120000	1.684
151.66 MHz	36.717	40	-3.283	273	2.141	Horizontal	120000	-12.282
158.21 MHz	34.344	40	-5.656	263	2.059	Horizontal	120000	-12.064
780.25 MHz	27.175	47	-19.825	8	4	Horizontal	120000	1.689


Table 4: Emissions in 30 to 1000 MHz

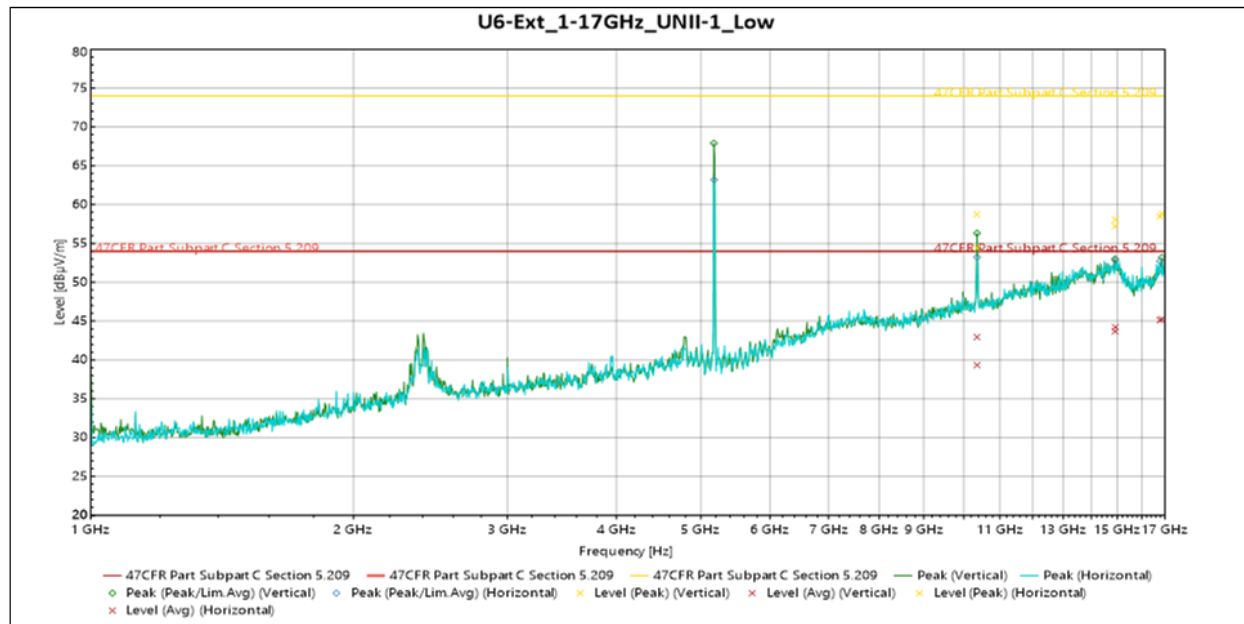

Source	Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
Peak	10.356 GHz	58.748	74	-15.252	315	2.217	Vertical	9.863
Peak	14.906 GHz	57.198	74	-16.802	229	2.539	Vertical	14.615
Peak	16.868 GHz	58.826	74	-15.174	273	2.368	Vertical	17.064
Avg	10.356 GHz	42.941	54	-11.059	315	2.217	Vertical	9.863
Avg	14.906 GHz	43.685	54	-10.315	229	2.539	Vertical	14.615
Avg	16.868 GHz	45.217	54	-8.783	273	2.368	Vertical	17.064
Peak	10.358 GHz	54.393	74	-19.607	241	3.798	Horizontal	9.897
Peak	14.919 GHz	58.06	74	-15.94	227	1.859	Horizontal	15.066
Peak	16.782 GHz	58.461	74	-15.539	52	2.725	Horizontal	16.786
Avg	10.358 GHz	39.329	54	-14.671	241	3.798	Horizontal	9.897


Source	Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
Avg	14.919 GHz	44.216	54	-9.784	227	1.859	Horizontal	15.066
Avg	16.782 GHz	45.136	54	-8.864	52	2.725	Horizontal	16.786

Table 5: Transmitting on the Lower Frequency 5180 MHz, 1-17 GHz

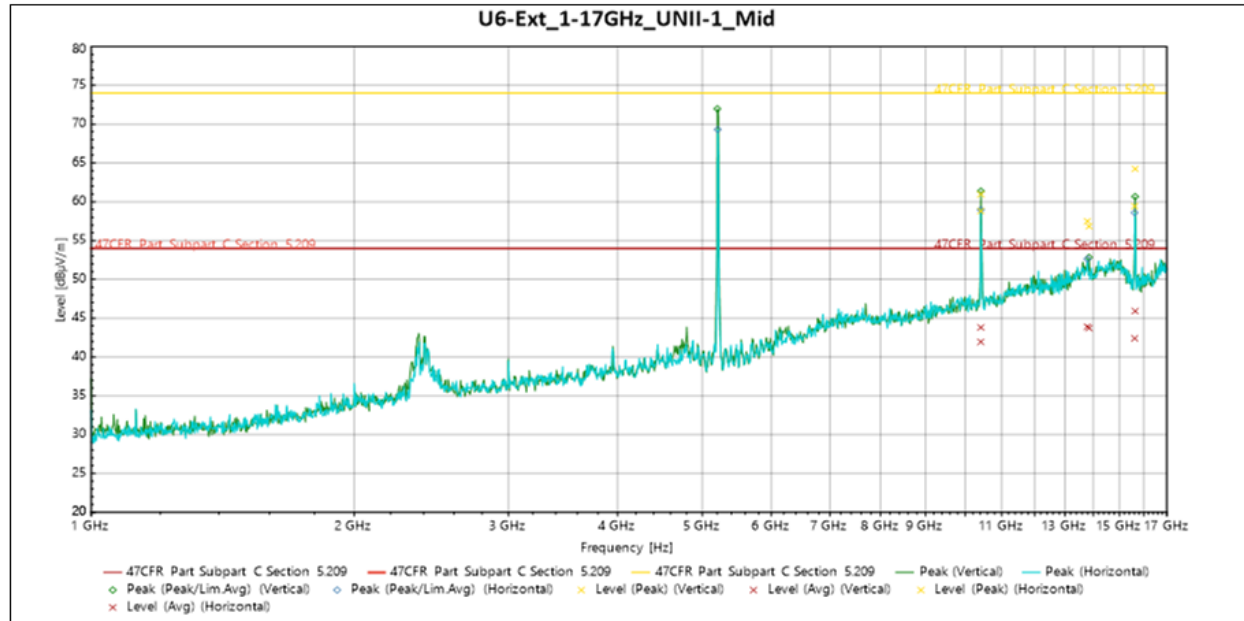


Source	Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
Peak	10.415 GHz	60.97	74	-13.03	159	1.864	Vertical	10.001
Peak	13.849 GHz	56.838	74	-17.162	195	2.005	Vertical	14.595
Peak	15.637 GHz	64.238	74	-9.762	218	2.73	Vertical	11.918
Avg	10.415 GHz	43.809	54	-10.191	159	1.864	Vertical	10.001
Avg	13.849 GHz	43.716	54	-10.284	195	2.005	Vertical	14.595
Avg	15.637 GHz	45.918	54	-8.082	218	2.73	Vertical	11.918
Peak	10.414 GHz	58.799	74	-15.201	247	3.621	Horizontal	9.99
Peak	13.789 GHz	57.492	74	-16.508	336	2.738	Horizontal	14.652
Peak	15.617 GHz	59.431	74	-14.569	142	2.186	Horizontal	11.942
Avg	10.414 GHz	41.937	54	-12.063	247	3.621	Horizontal	9.99
Avg	13.789 GHz	43.912	54	-10.088	336	2.738	Horizontal	14.652
Avg	15.617 GHz	42.393	54	-11.607	142	2.186	Horizontal	11.942

Table 6: Transmitting on the Middle Frequency 5210 MHz, 1-17 GHz

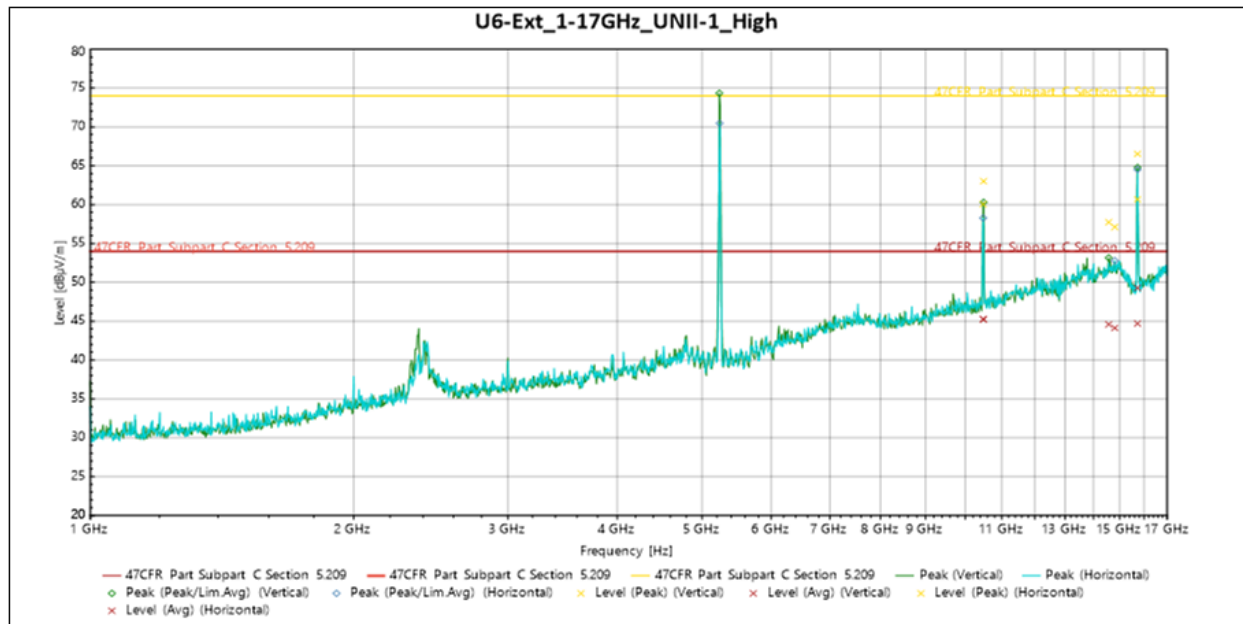


Source	Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
Peak	10.488 GHz	63.024	74	-10.976	327	1.855	Vertical	10.201
Peak	14.576 GHz	57.741	74	-16.259	106	3.1	Vertical	15.158
Peak	15.725 GHz	66.526	74	-7.474	230	2.566	Vertical	12.029
Avg	10.488 GHz	45.211	54	-8.789	327	1.855	Vertical	10.201
Avg	14.576 GHz	44.585	54	-9.415	106	3.1	Vertical	15.158
Avg	15.725 GHz	49.279	54	-4.721	230	2.566	Vertical	12.029
Peak	10.476 GHz	60.05	74	-13.95	242	2.738	Horizontal	10.067
Peak	14.812 GHz	57.123	74	-16.877	358	3.621	Horizontal	15.023
Peak	15.724 GHz	60.684	74	-13.316	192	3.617	Horizontal	12.024
Avg	10.476 GHz	45.271	54	-8.729	242	2.738	Horizontal	10.067
Avg	14.812 GHz	44.13	54	-9.87	358	3.621	Horizontal	15.023
Avg	15.724 GHz	44.693	54	-9.307	192	3.617	Horizontal	12.024

Table 7: Transmitting on the Higher Frequency 5240 MHz, 1-17 GHz

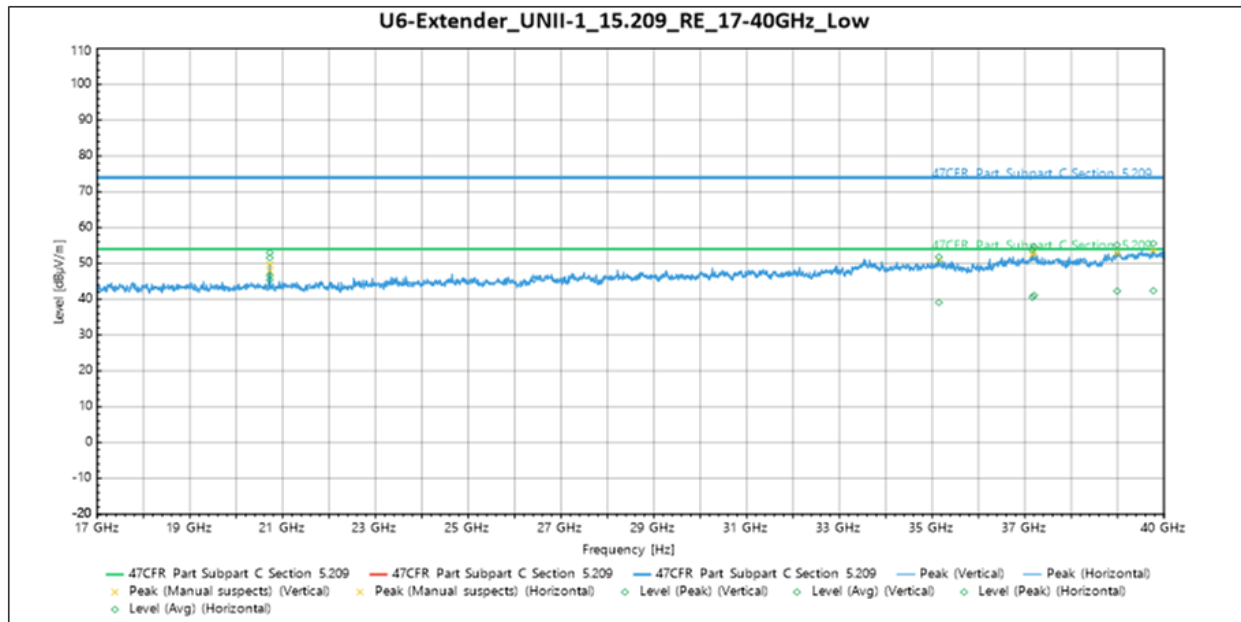


Source	Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
Peak	20.72 GHz	52.989	74	-21.011	180	Vertical	-5.439
Peak	37.2 GHz	54.626	74	-19.374	148	Vertical	1.335
Peak	39.771 GHz	55.573	74	-18.427	132	Vertical	3.369
Avg	20.72 GHz	46.659	54	-7.341	180	Vertical	-5.439
Avg	37.2 GHz	41.09	54	-12.91	148	Vertical	1.335
Avg	39.771 GHz	42.397	54	-11.603	132	Vertical	3.369
Peak	20.72 GHz	51.603	74	-22.397	238	Horizontal	-5.439
Peak	35.145 GHz	51.825	74	-22.175	258	Horizontal	1.02
Peak	37.165 GHz	53.929	74	-20.071	141	Horizontal	0.916
Peak	38.99 GHz	55.168	74	-18.832	317	Horizontal	3.032
Avg	20.72 GHz	45.444	54	-8.556	238	Horizontal	-5.439
Avg	35.145 GHz	39.108	54	-14.892	258	Horizontal	1.02
Avg	37.165 GHz	40.596	54	-13.404	141	Horizontal	0.916
Avg	38.99 GHz	42.296	54	-11.704	317	Horizontal	3.032

Table 8: Transmitting on the Lower Frequency 5180 MHz, 17-40 GHz

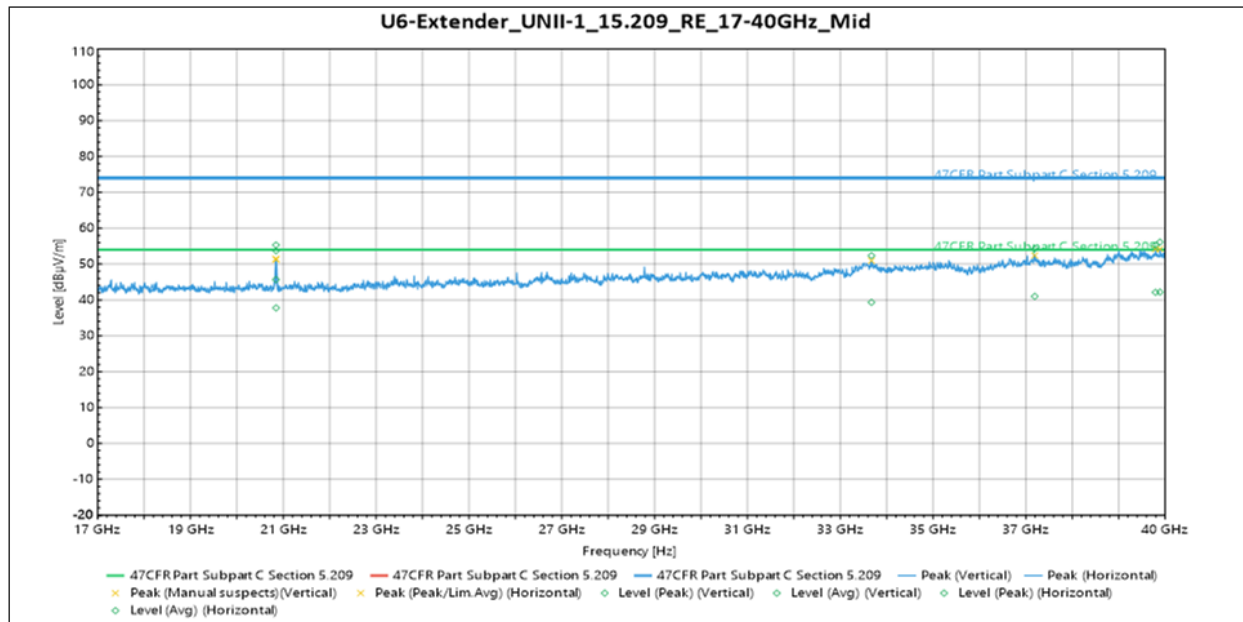


Source	Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
Peak	20.84 GHz	55.326	74	-18.674	200	Vertical	-5.767
Peak	33.673 GHz	52.367	74	-21.633	92	Vertical	1.295
Peak	39.795 GHz	55.324	74	-18.676	228	Vertical	3.28
Avg	20.84 GHz	45.705	54	-8.295	200	Vertical	-5.767
Avg	33.673 GHz	39.345	54	-14.655	92	Vertical	1.295
Avg	39.795 GHz	42.14	54	-11.86	228	Vertical	3.28
Peak	20.842 GHz	53.711	74	-20.289	308	Horizontal	-5.742
Peak	37.19 GHz	54.258	74	-19.742	115	Horizontal	1.302
Peak	39.89 GHz	56.153	74	-17.847	78	Horizontal	3.612
Avg	20.842 GHz	37.798	54	-16.202	308	Horizontal	-5.742
Avg	37.19 GHz	41.02	54	-12.98	115	Horizontal	1.302
Avg	39.89 GHz	42.207	54	-11.793	78	Horizontal	3.612

Table 9: Transmitting on the Middle Frequency 5210 MHz, 17-40 GHz

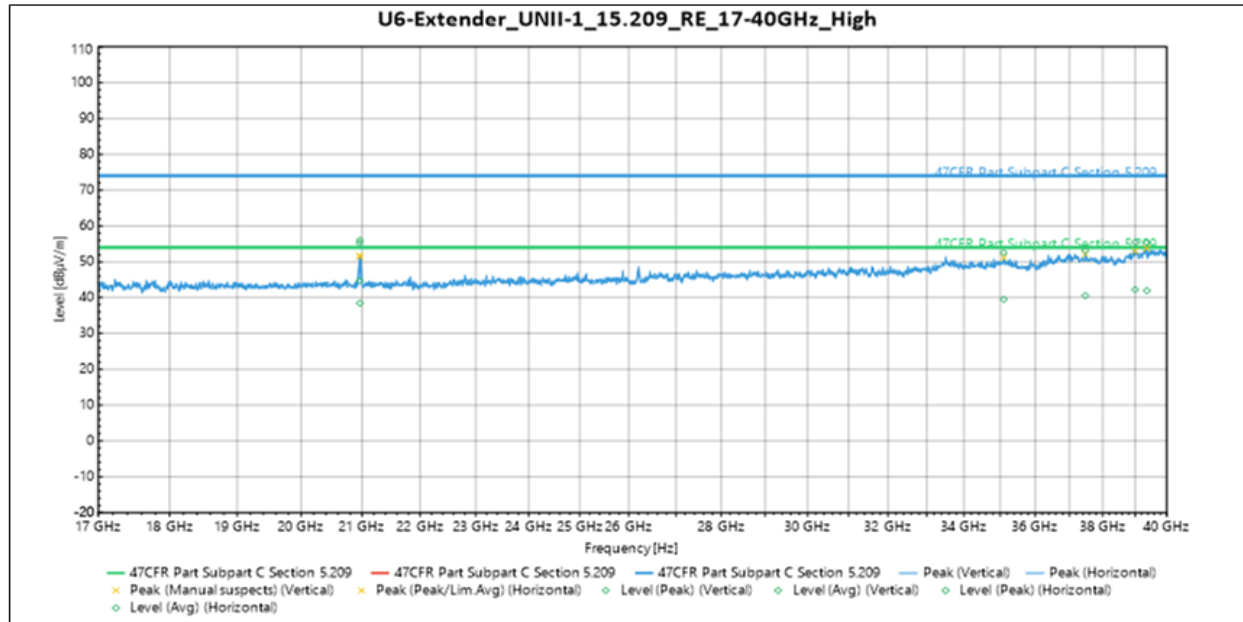


Source	Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
Peak	20.96 GHz	55.19	74	-18.81	200	Vertical	-5.632
Peak	37.472 GHz	53.178	74	-20.822	22	Vertical	1.342
Peak	38.999 GHz	55.507	74	-18.493	204	Vertical	3.061
Avg	20.96 GHz	44.699	54	-9.301	200	Vertical	-5.632
Avg	37.472 GHz	40.584	54	-13.416	22	Vertical	1.342
Avg	38.999 GHz	42.25	54	-11.75	204	Vertical	3.061
Peak	20.963 GHz	55.999	74	-18.001	307	Horizontal	-5.6
Peak	35.102 GHz	52.563	74	-21.437	94	Horizontal	1.171
Peak	39.365 GHz	55.405	74	-18.595	179	Horizontal	3.096
Avg	20.963 GHz	38.45	54	-15.55	307	Horizontal	-5.6
Avg	35.102 GHz	39.522	54	-14.478	94	Horizontal	1.171
Avg	39.365 GHz	41.956	54	-12.044	179	Horizontal	3.096


Table 10: Transmitting on the Higher Frequency 5240 MHz, 17-40 GHz

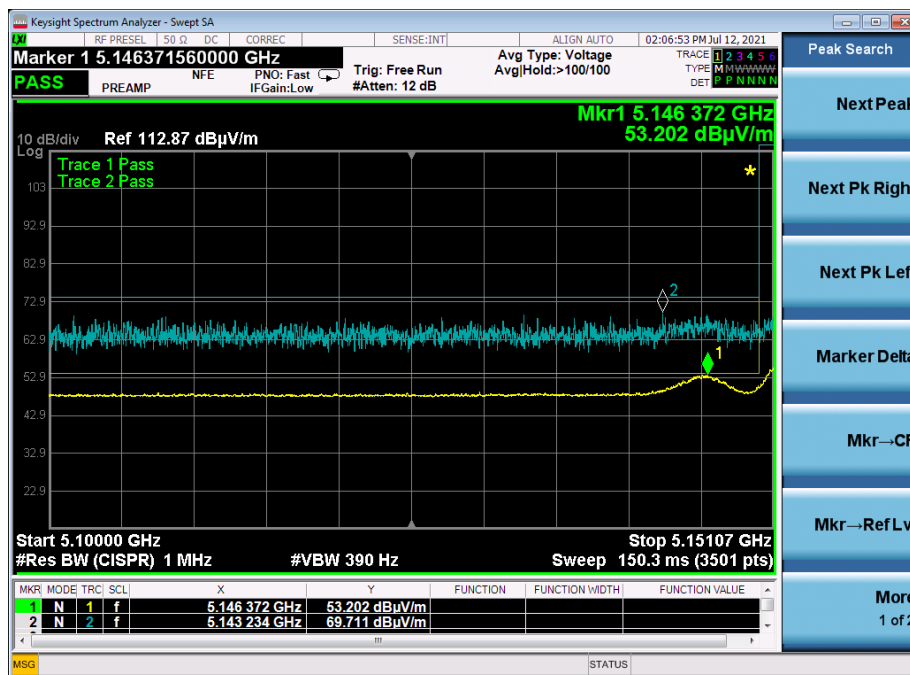


Graph 1: Band Edge ax20 Mode Low 5180 MHz

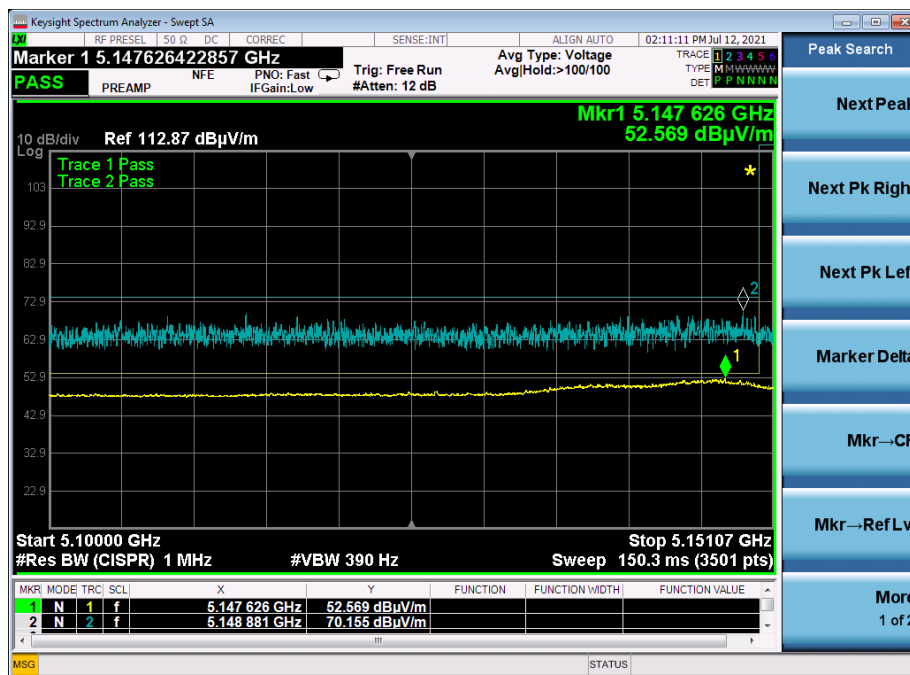


Graph 2: Band Edge ax20 Mode Middle 5210 MHz

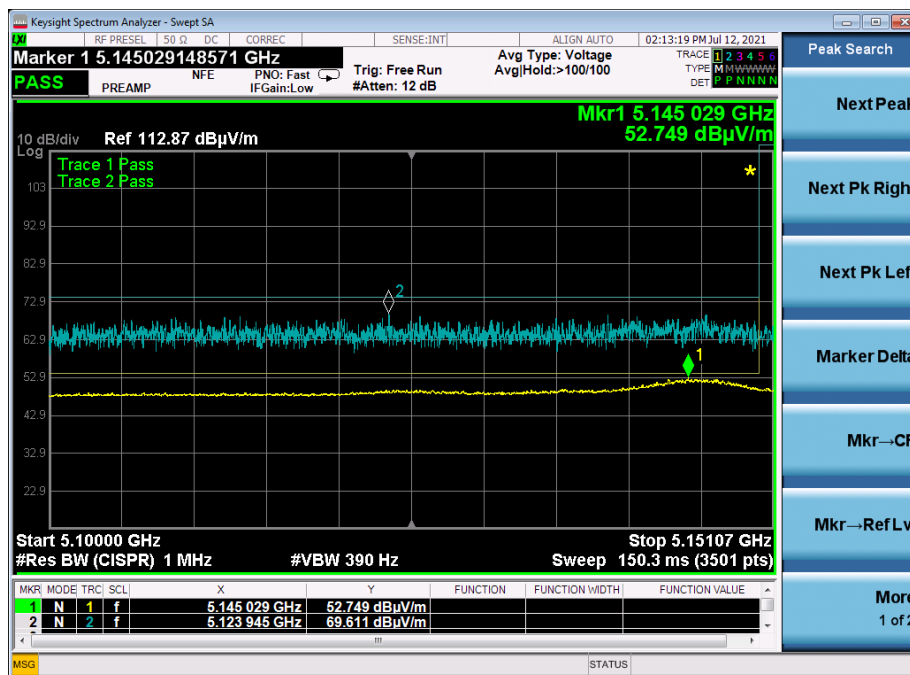


Graph 3: Band Edge ax20 Mode High 5240 MHz

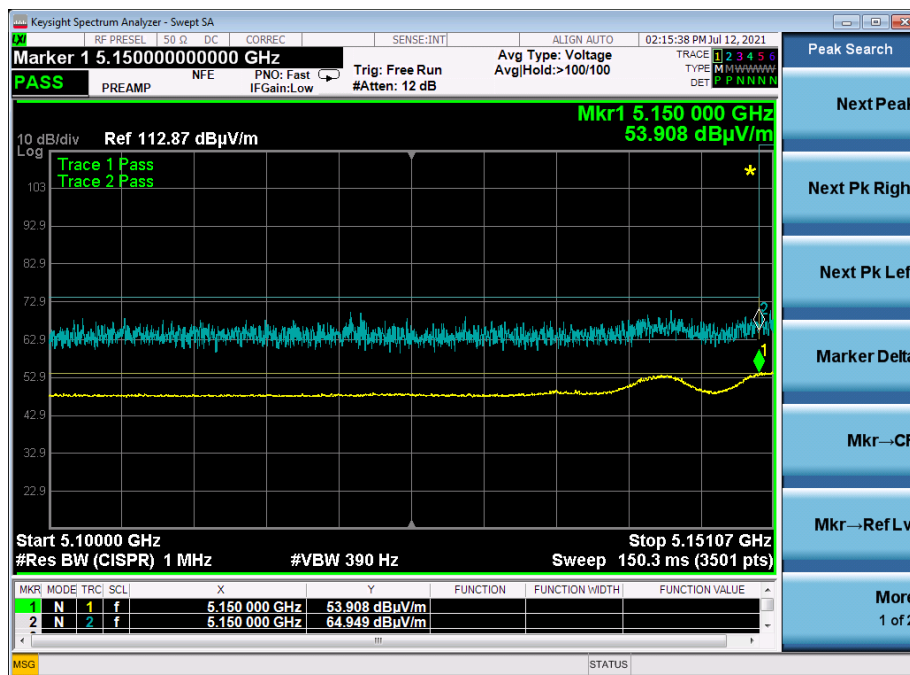

Graph 4: Band Edge ax40 Mode Low 5180 MHz

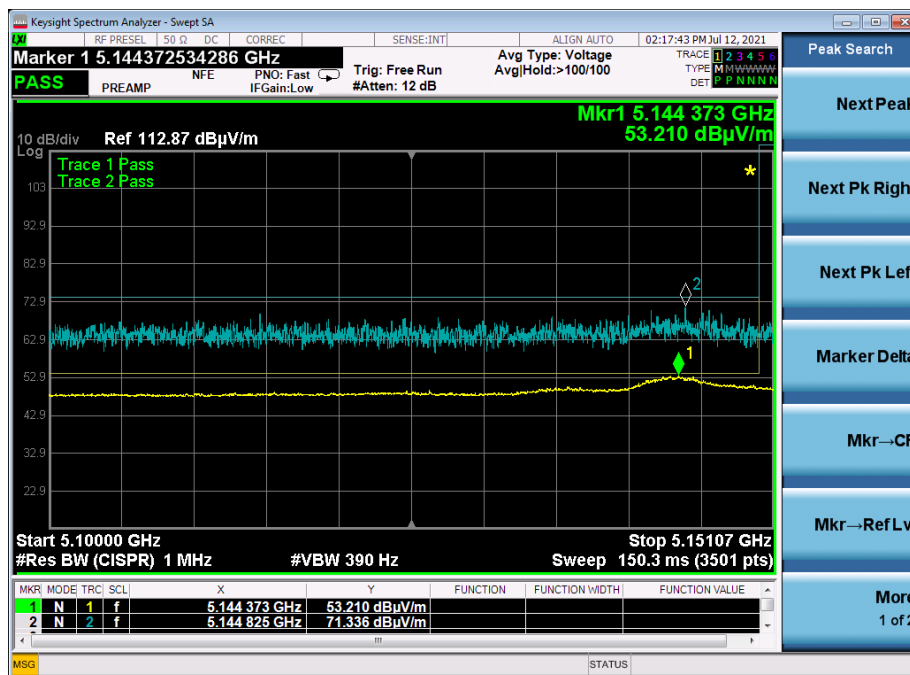

Graph 5: Band Edge ax40 Mode High 5230 MHz

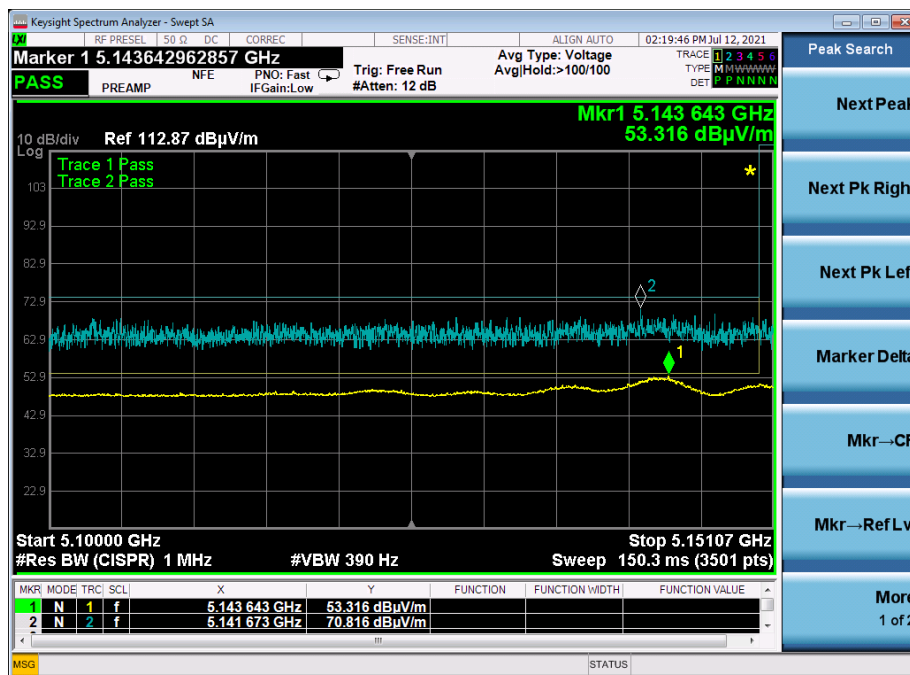

Graph 6: Band Edge ax80 Mode 5210 MHz

5.6 Maximum Power Spectral Density

For the band 5.15 GHz~5.25 GHz

(1) For outdoor access:

(A) The maximum conducted output power shall be less than or equal to 1 Watt.
(B) The maximum power spectral density shall be less than or equal to 17 dBm in any 1 MHz band.

(C) If transmitting antennas of directional gain greater than 6 dBi are used, both the
31

maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dBi that the directional gain of the antenna exceeds 6 dBi.
(D) The maximum EIRP at any elevation angle above 30 degrees as measured from the horizon shall be less than or equal to 21 dBm.

(2) For indoor access:

(A) The maximum conducted output power over the frequency band of operation shall be less than or equal to 1 Watt.

(B) The maximum power spectral density shall be less than or equal to 17 dBm in any 1 MHz band.

(C) If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dBi that the directional gain of the antenna exceeds 6 dBi.

(3) For fixed point-to-point access:

(A) The maximum conducted output power shall be less than or equal to 1 Watt.

(B) The maximum power spectral density shall be less than or equal to 17 dBm in any 1 MHz band.

(C) If transmitting antennas of directional gain greater than 23 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dBi that the directional gain of the antenna exceeds 23 dBi.

(D) Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

The maximum average power spectral density conducted from the intentional radiator of the antenna shall not be greater than 17 dBm in any 1 MHz band during any time interval of continuous transmission.


Results of this testing are summarized.



Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Measured PSD
OFDM 20	5180	Mcs0_Nss4	38	8.88
OFDM 20	5210	Mcs0_Nss4	48	13.47
OFDM 20	5240	Mcs0_Nss4	52	15.08
HT 20	5180	Mcs0_Nss4	40	8.04
HT 20	5210	Mcs0_Nss4	48	12.11
HT 20	5240	Mcs0_Nss4	50	13.17
HT 40	5190	Mcs0_Nss4	30	0.67
HT 40	5230	Mcs0_Nss4	43	7.25
VHT 20	5180	Mcs0_Nss4	40	8.11
VHT 20	5210	Mcs0_Nss4	48	12.12
VHT 20	5240	Mcs0_Nss4	50	13.15
VHT 40	5190	Mcs0_Nss4	30	0.67
VHT 40	5230	Mcs0_Nss4	43	7.2
VHT 80	5210	Mcs0_Nss4	29	-3.06
HE 20	5180	Mcs0_Nss4	38	7.41
HE 20	5210	Mcs0_Nss4	47	11.61
HE 20	5240	Mcs0_Nss4	50	12.98
HE 40	5190	Mcs0_Nss4	34	2.69
HE 40	5230	Mcs0_Nss4	43	7.12
HE 80	5210	Mcs0_Nss4	29	-2.88

Result


The maximum average power spectral density was less than the limit of 17dBm; therefore, the EUT complies with the specification.

6 Test Setup Photos

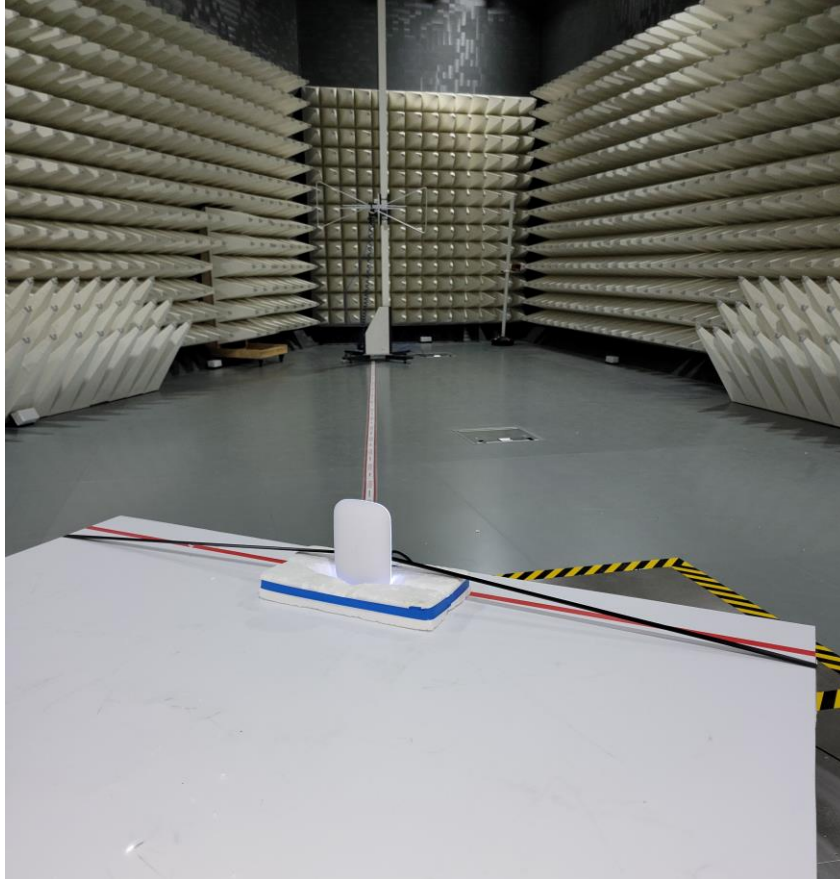

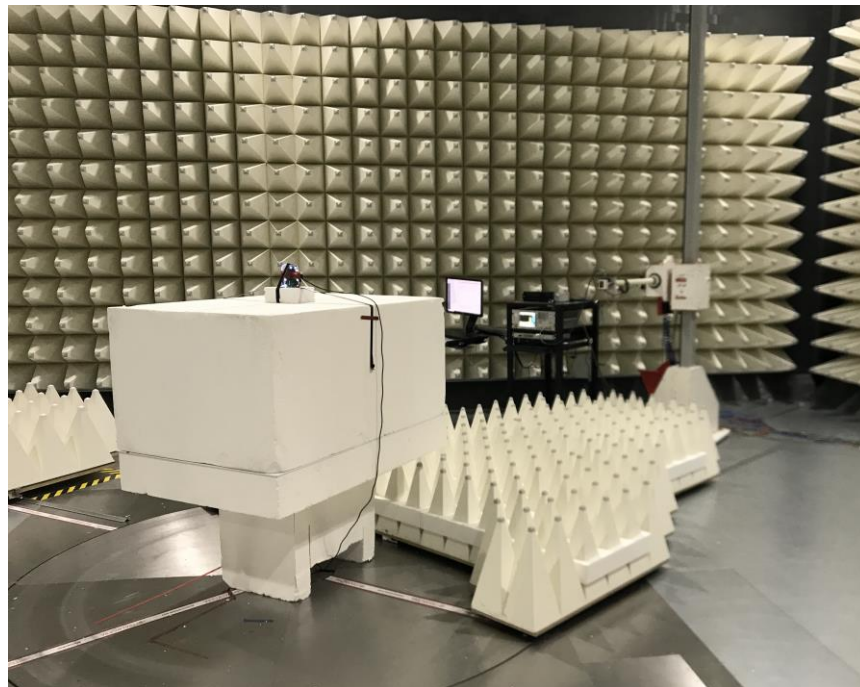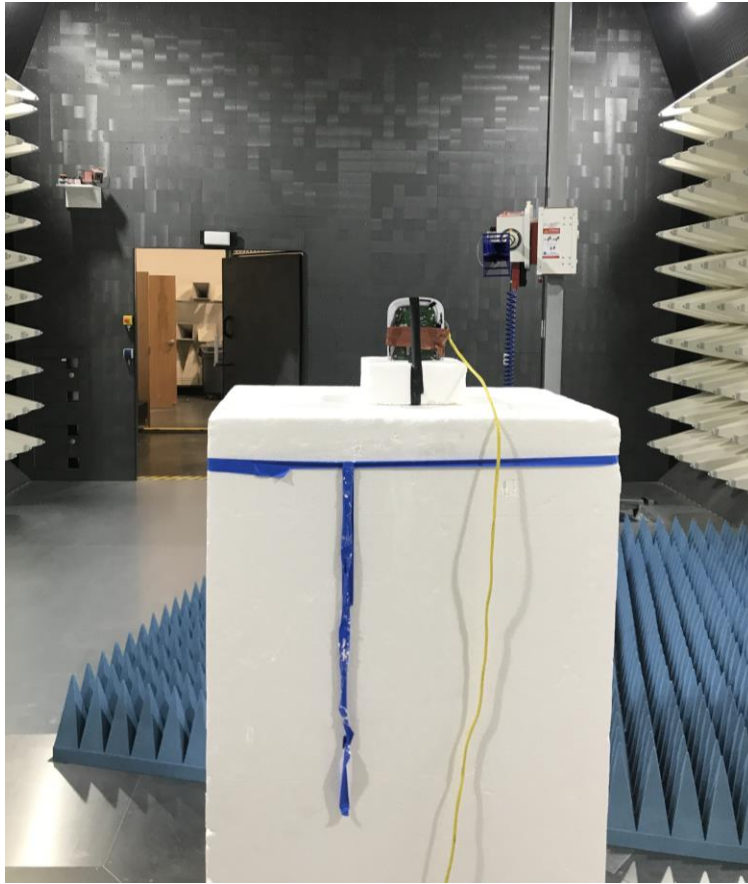



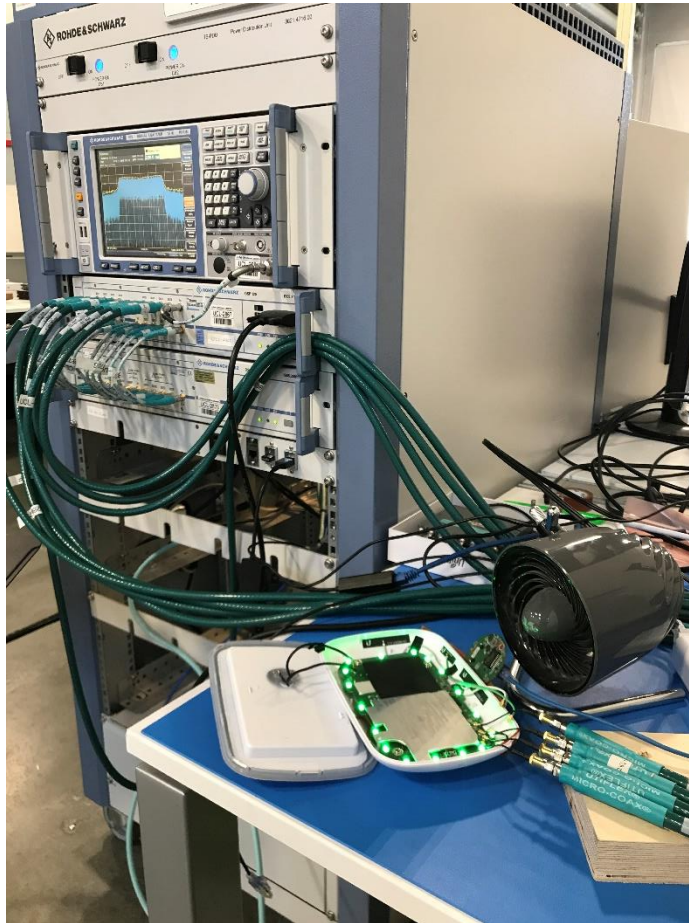

-- End of Test Report --