




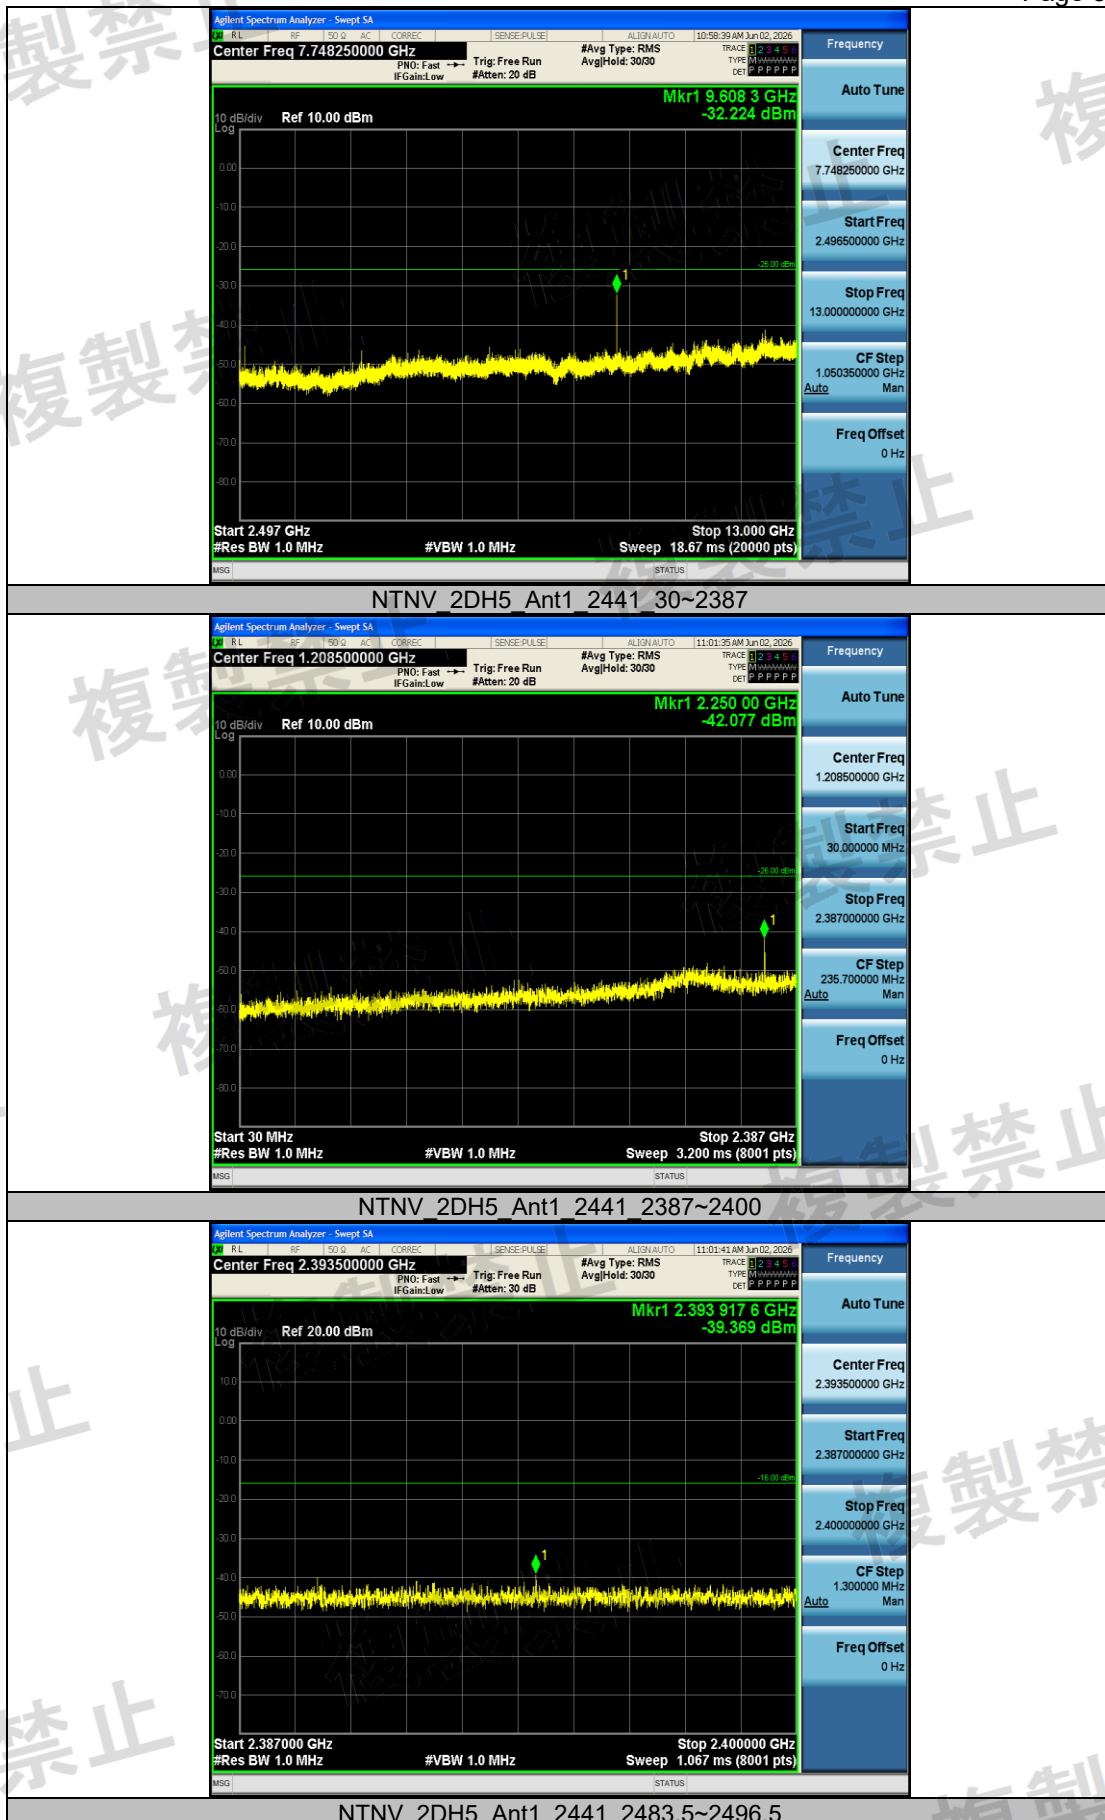
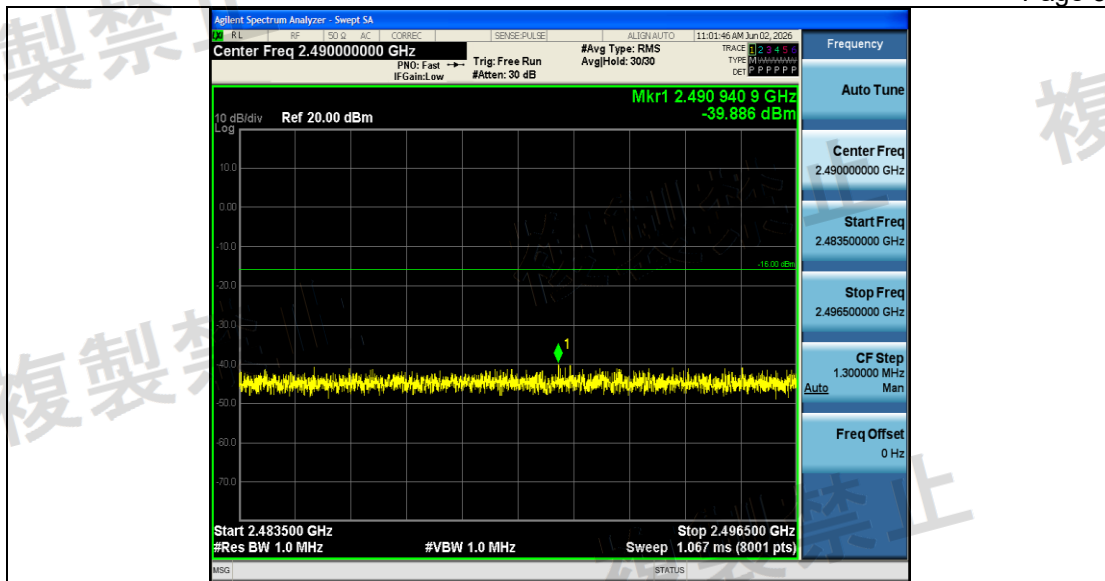
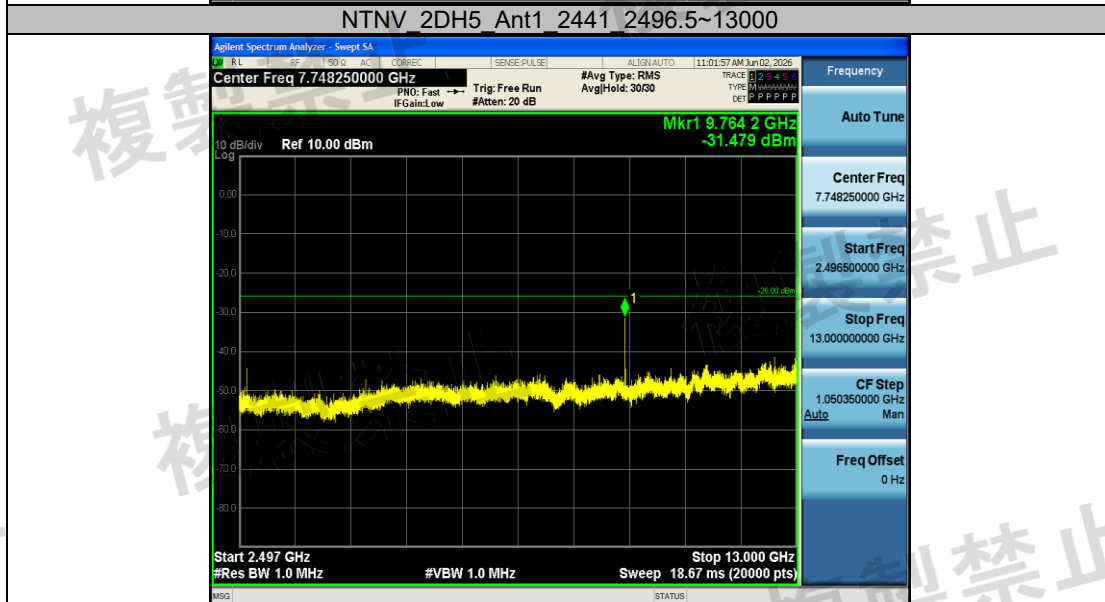
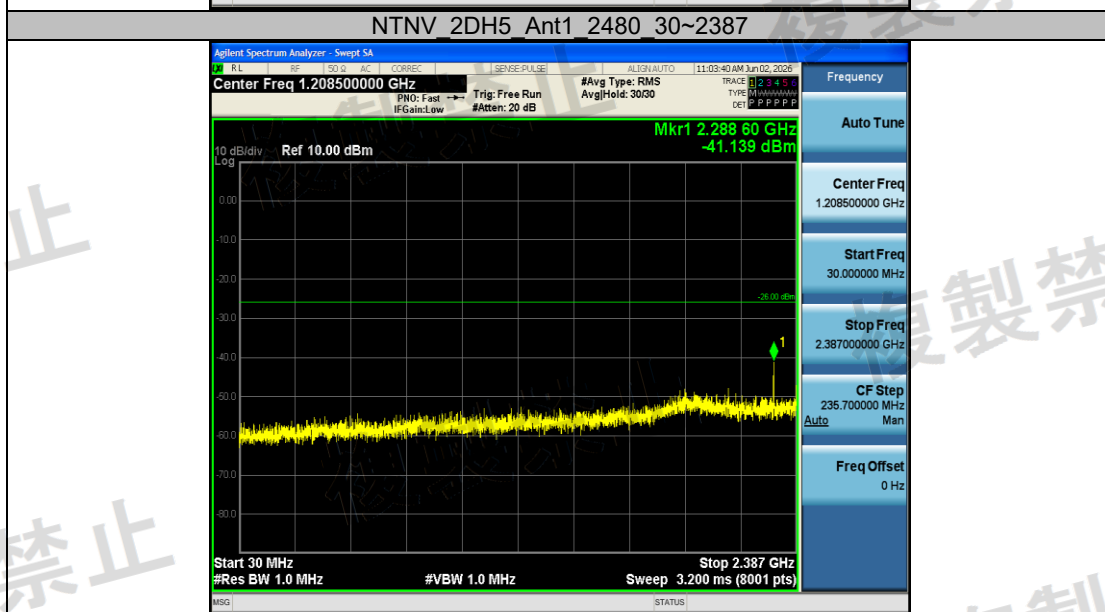


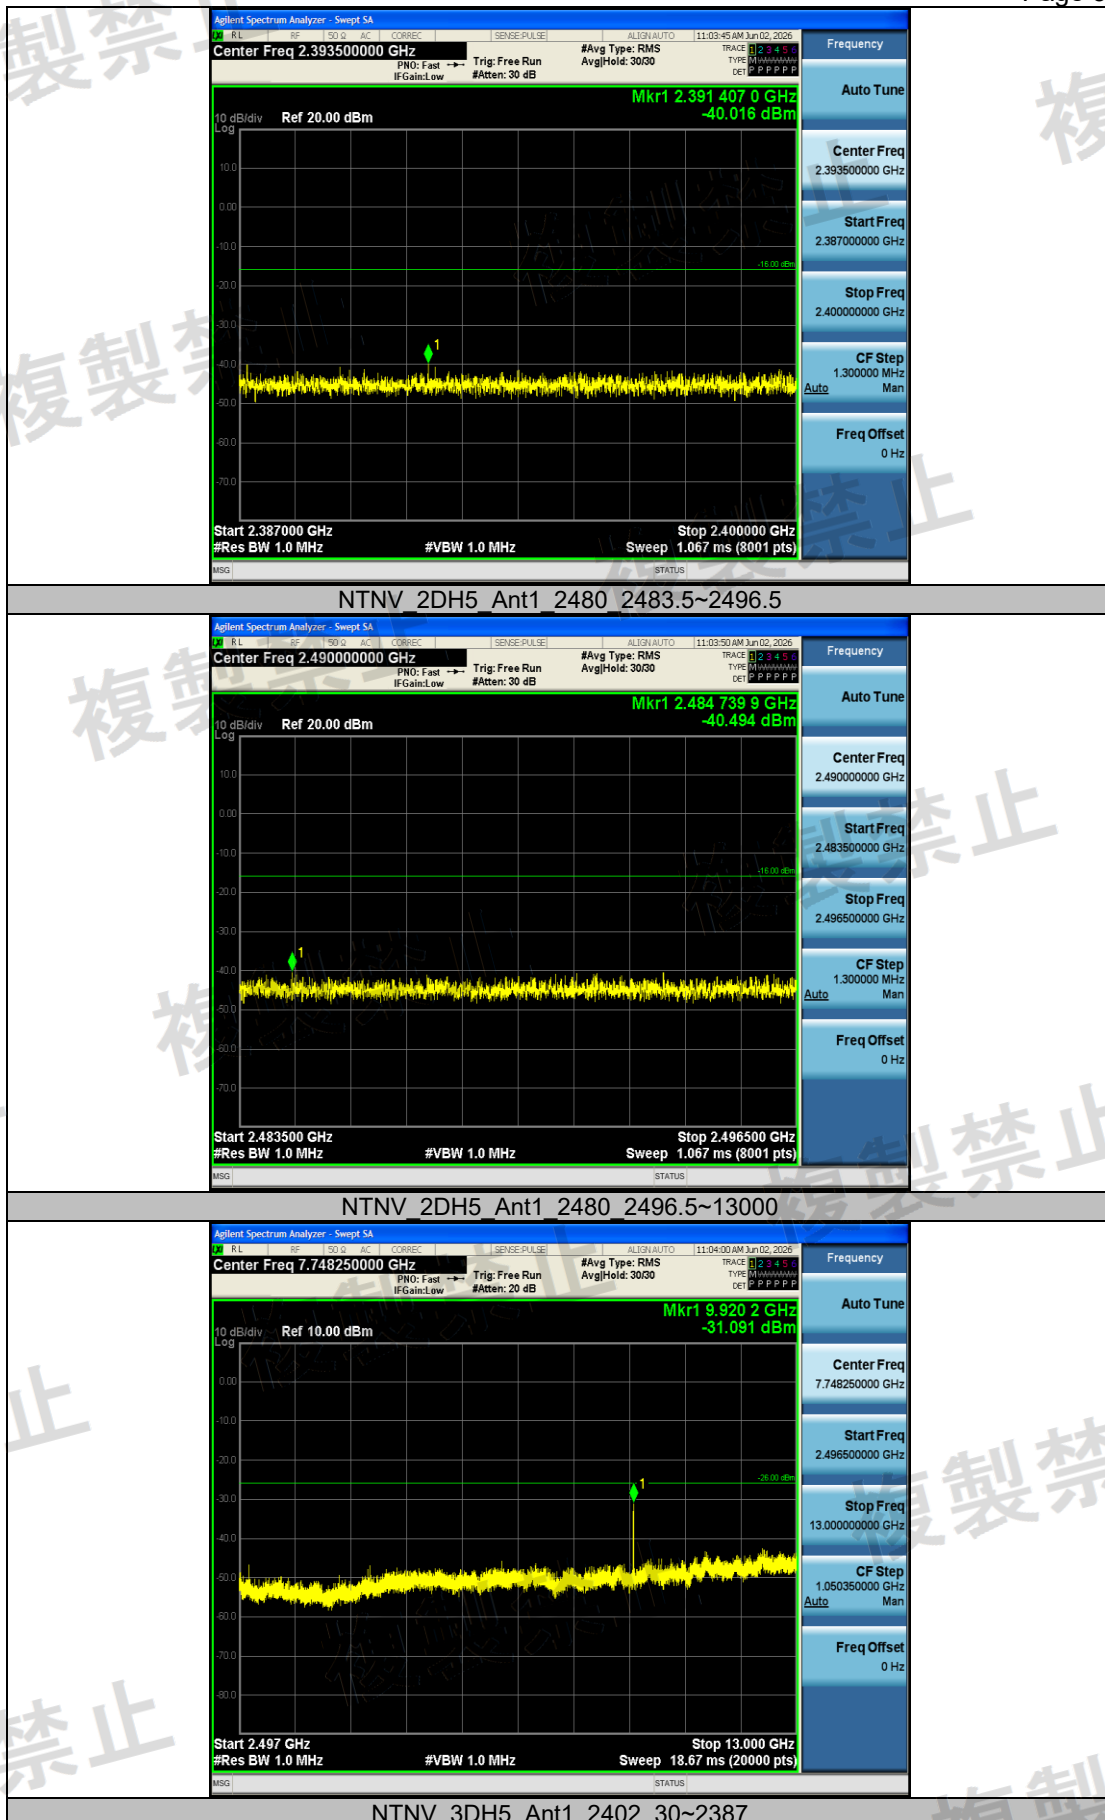


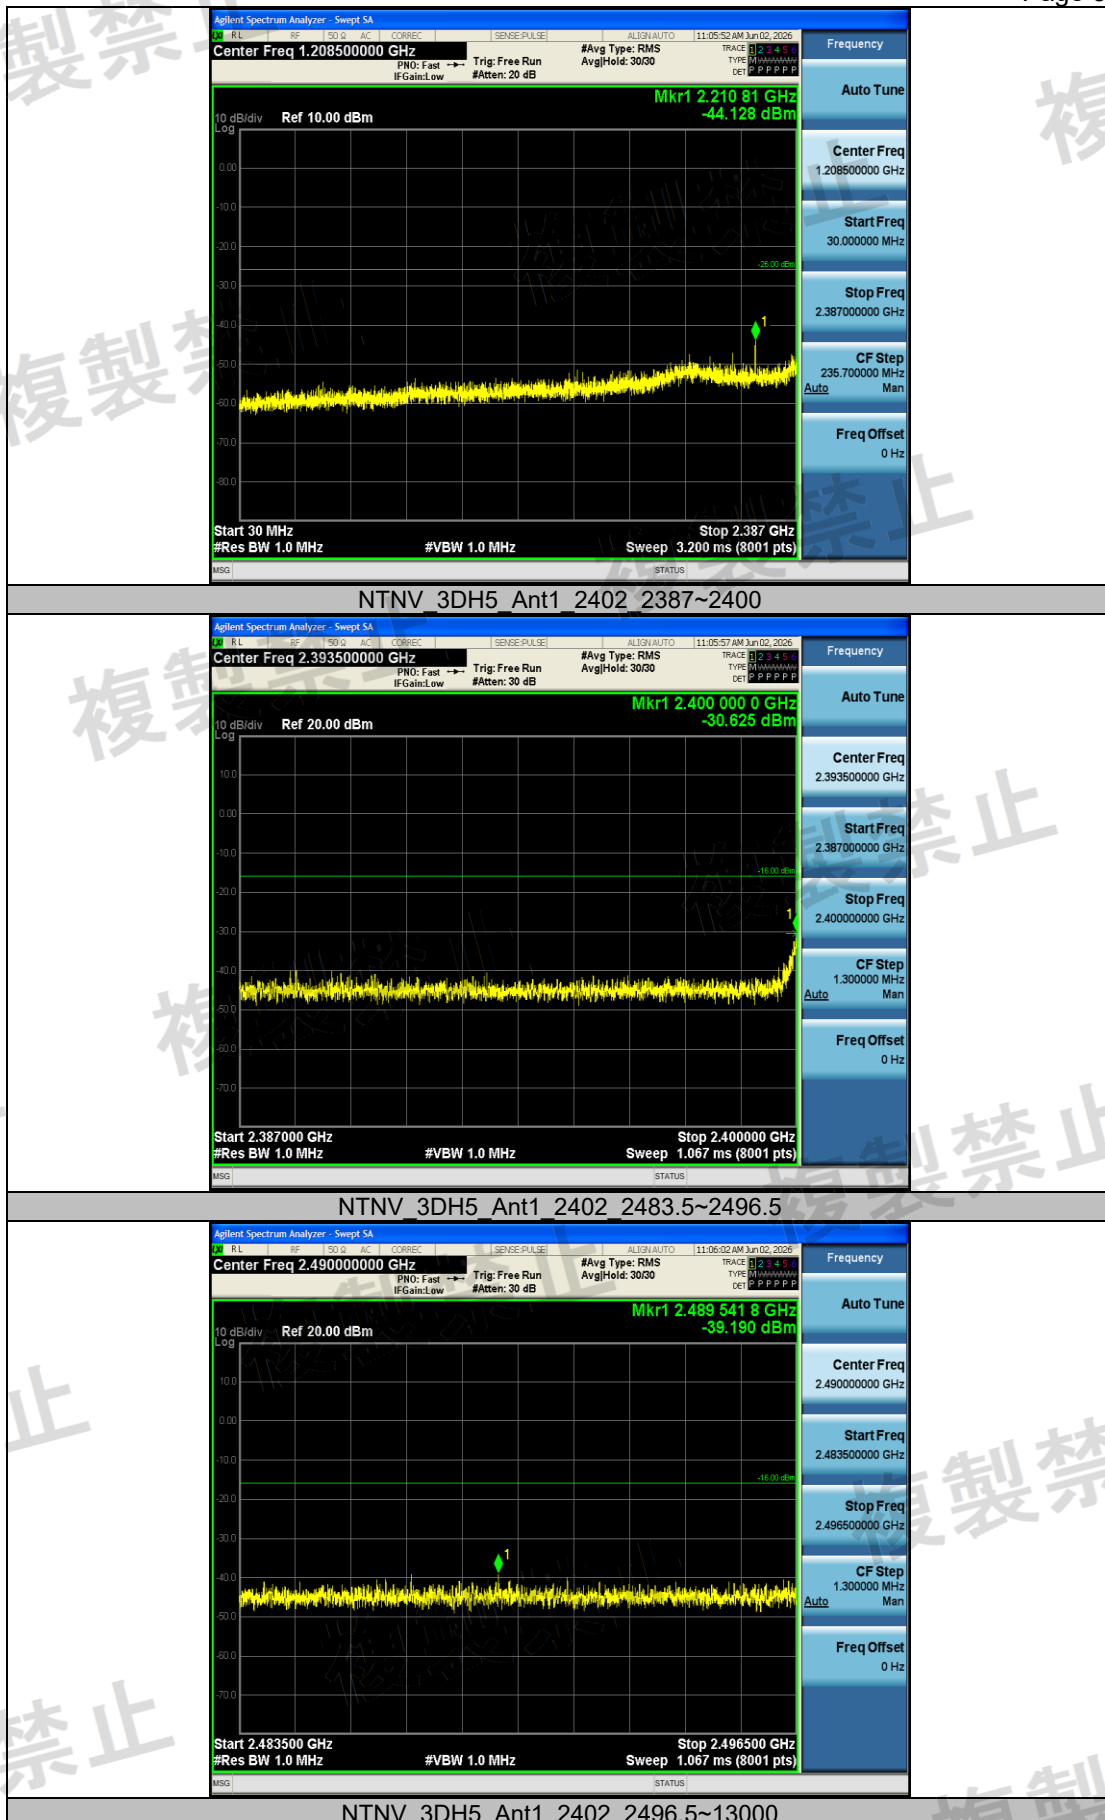




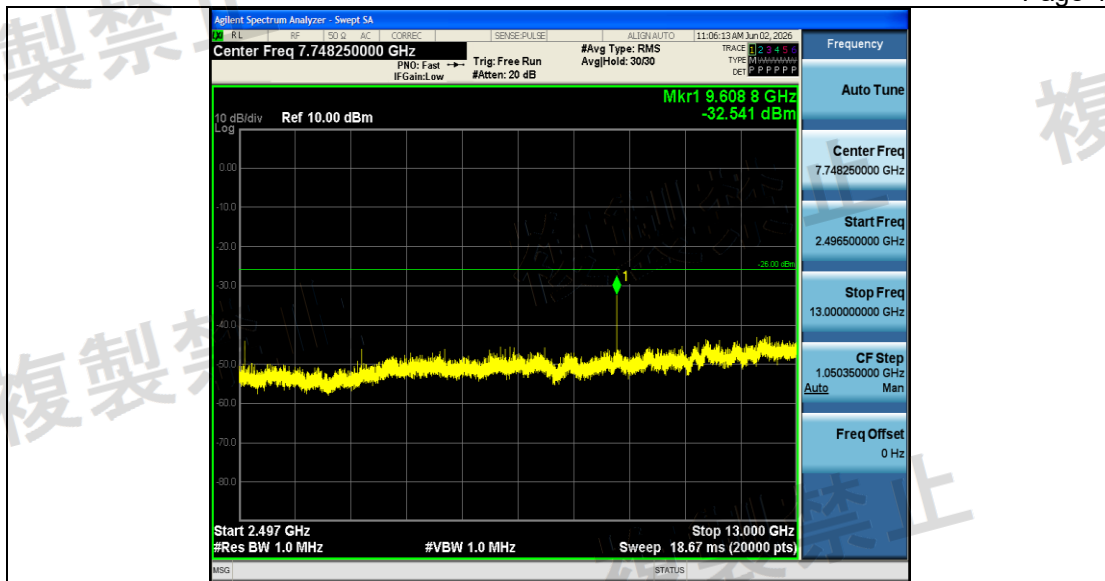




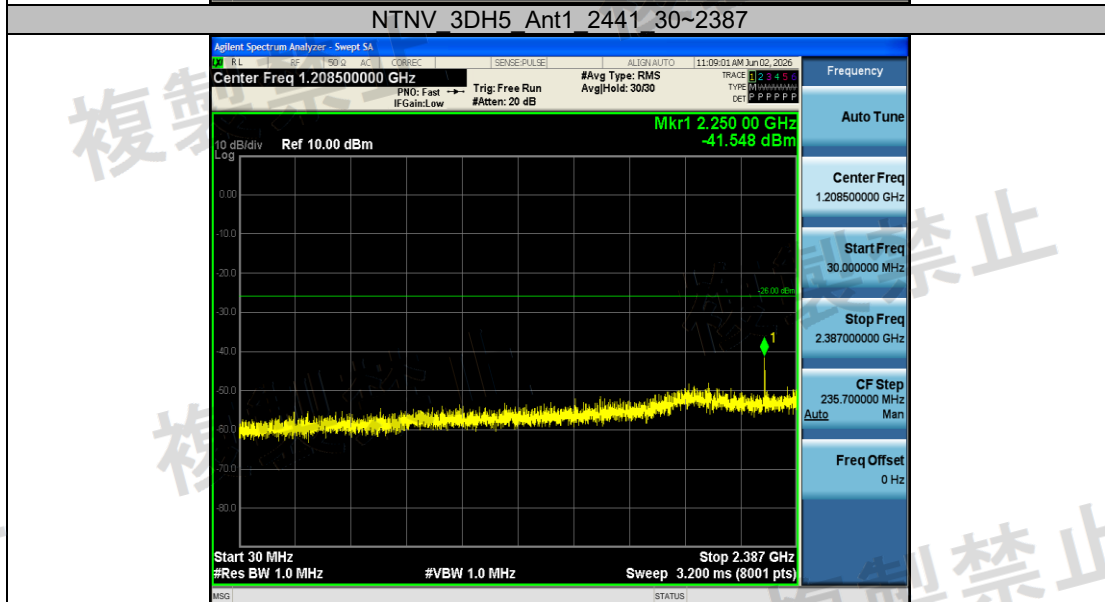




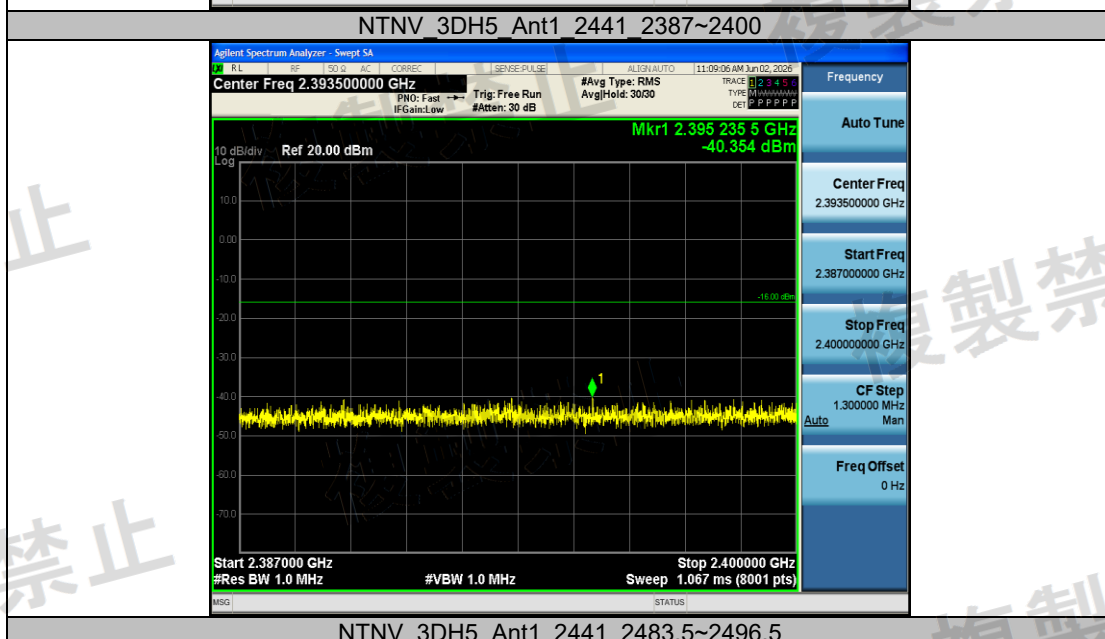




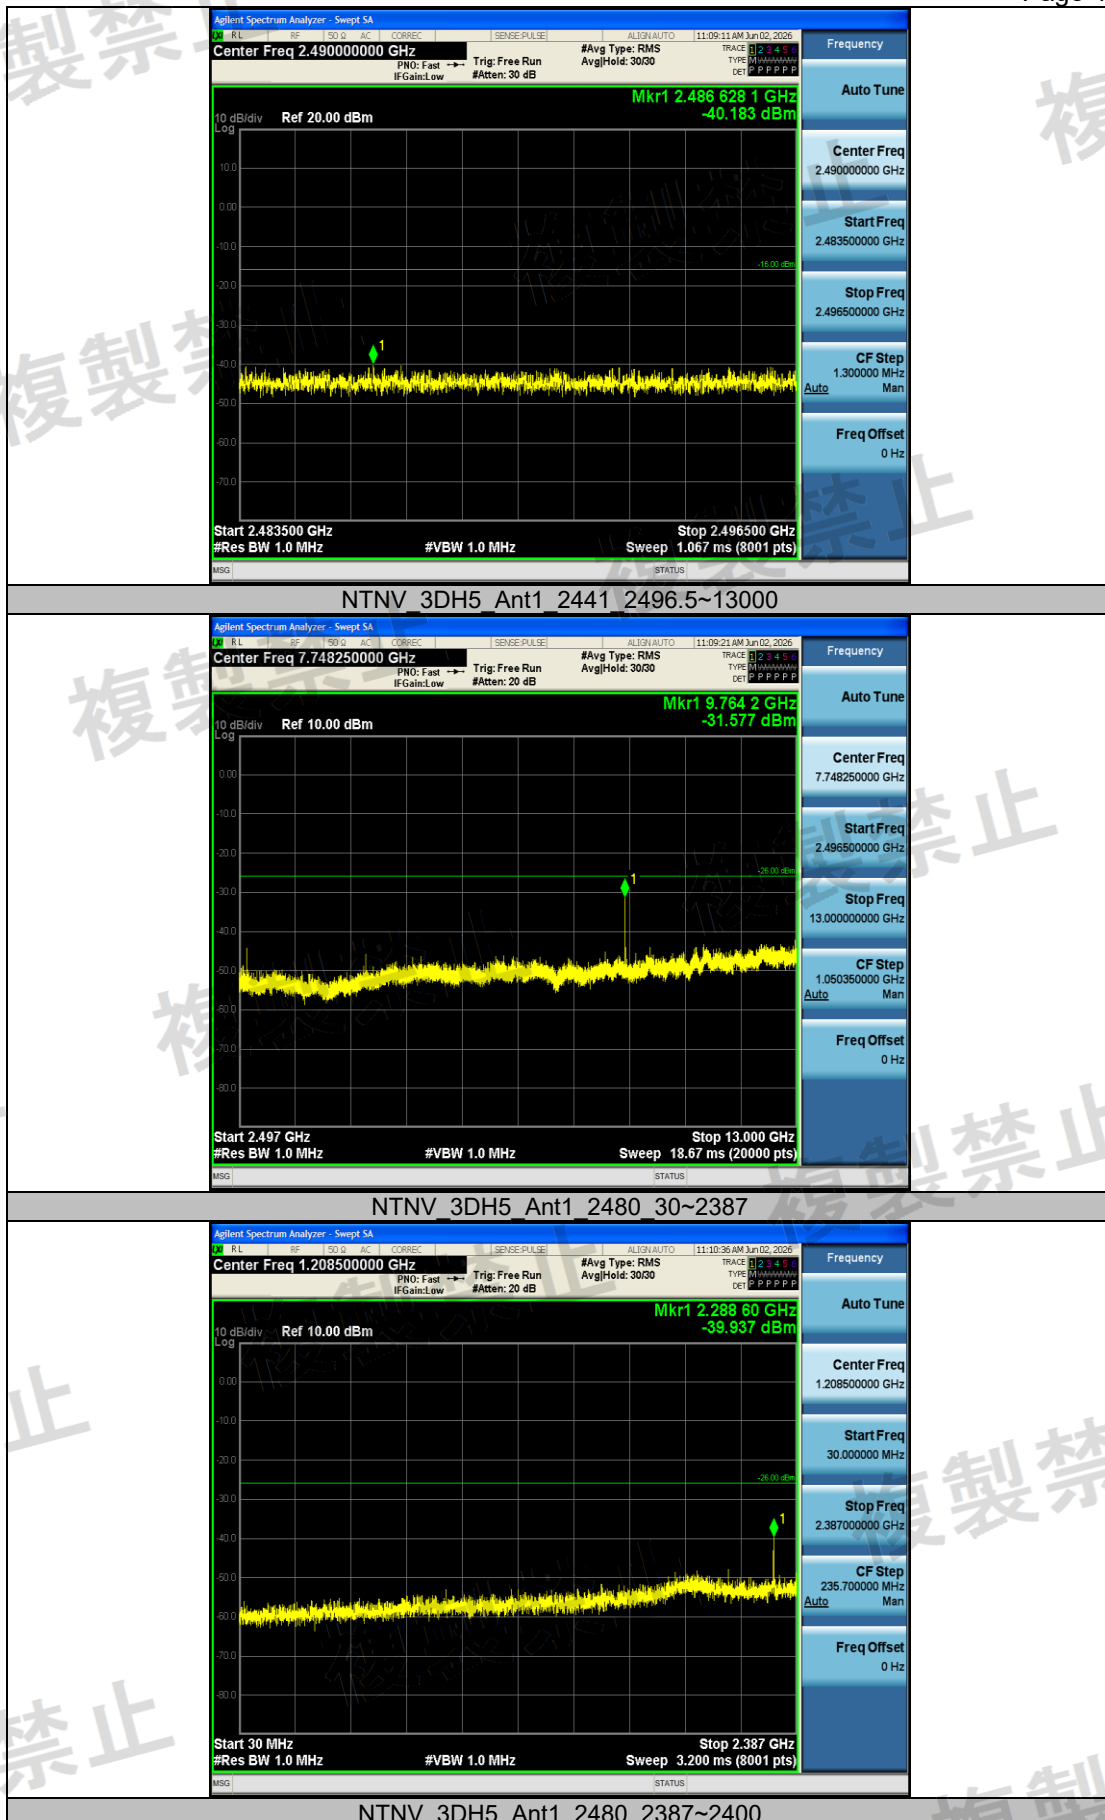


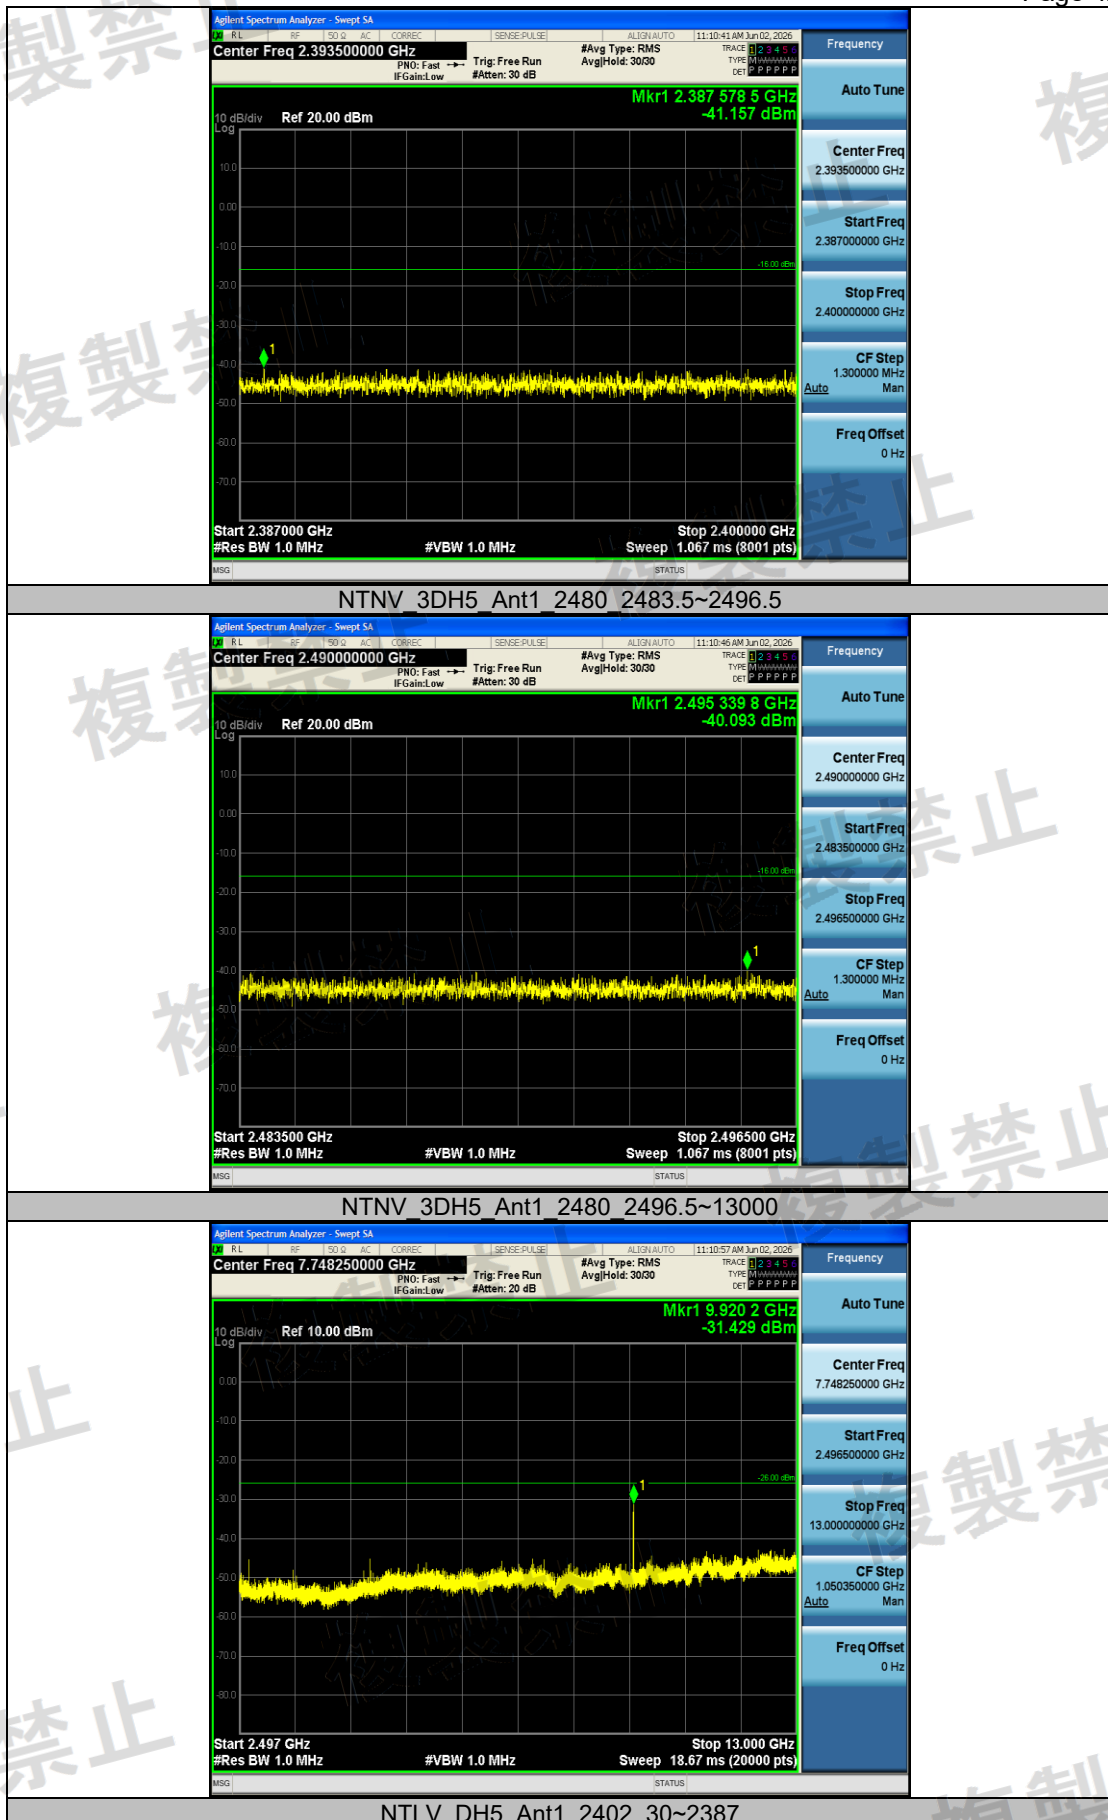


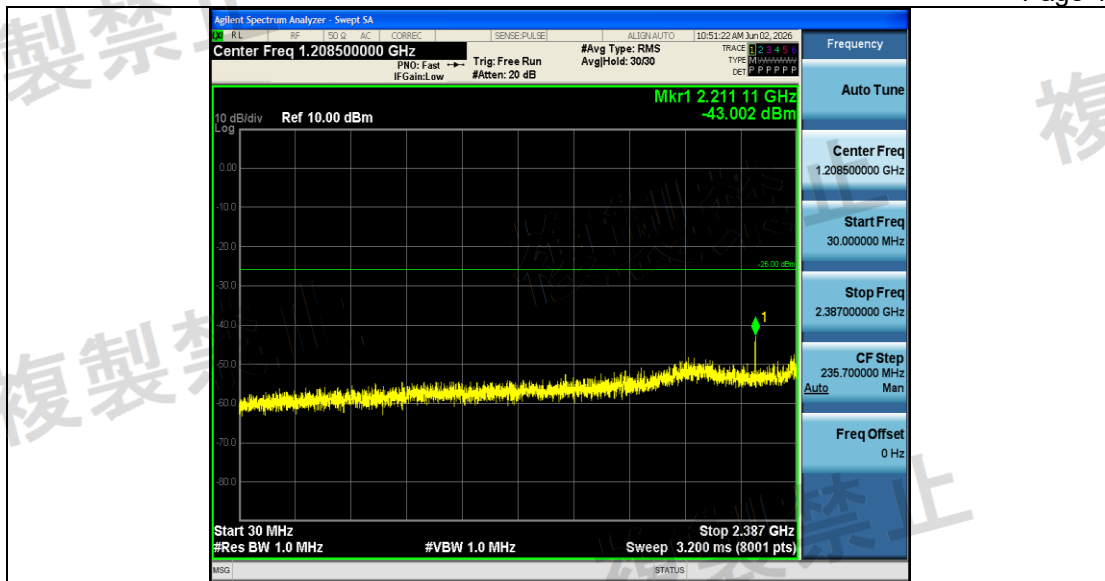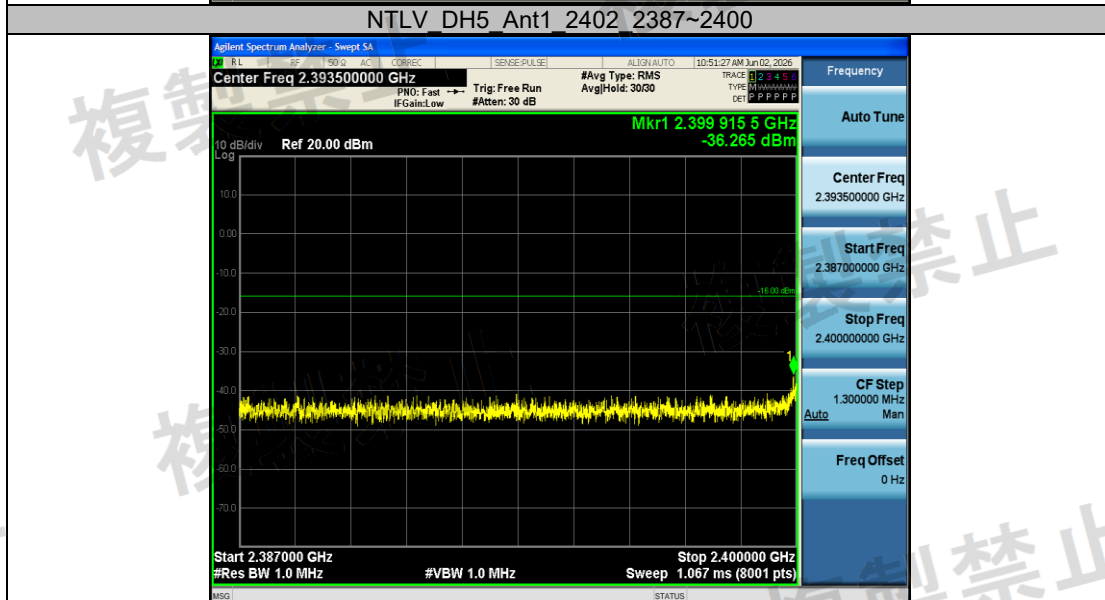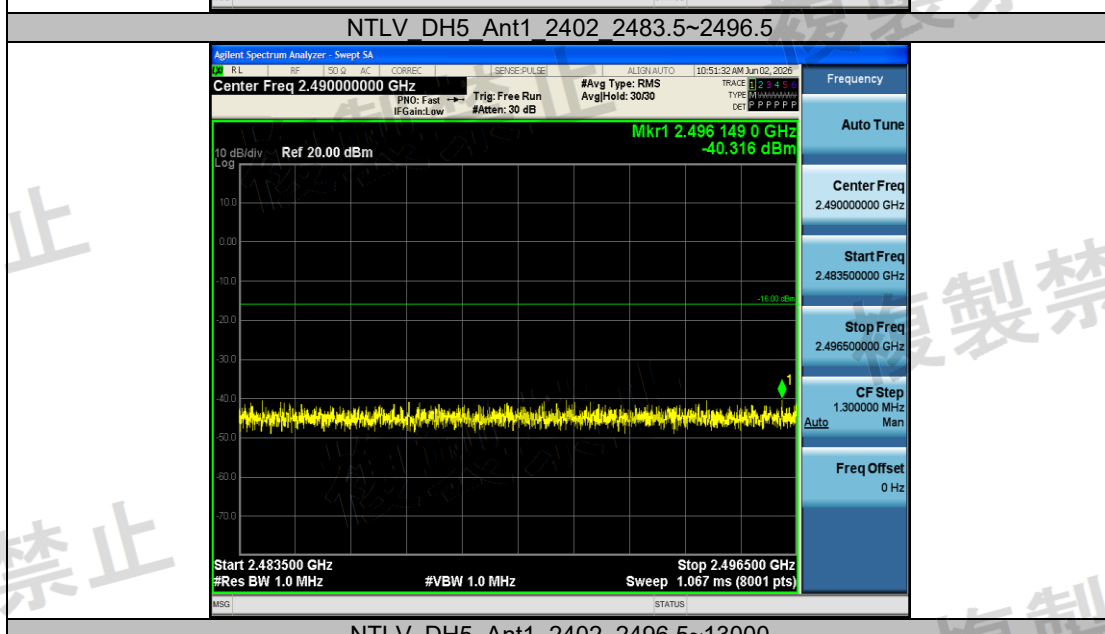

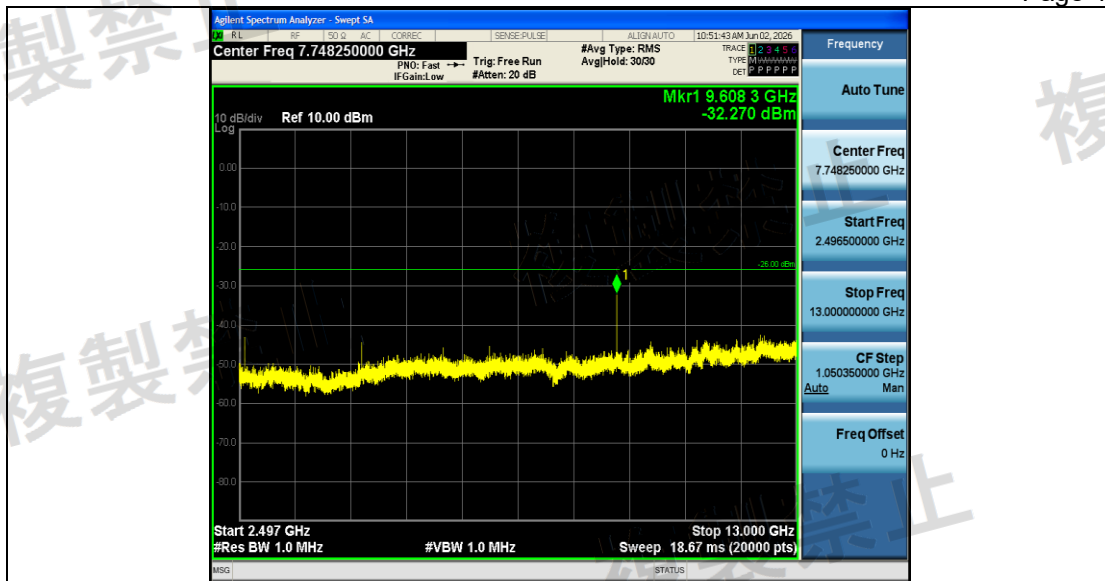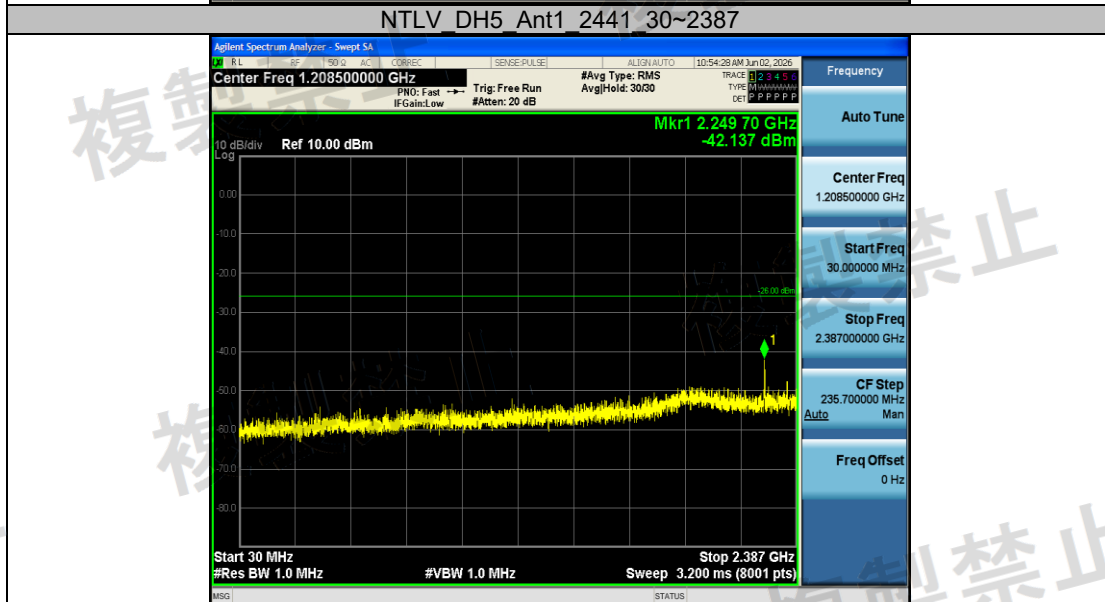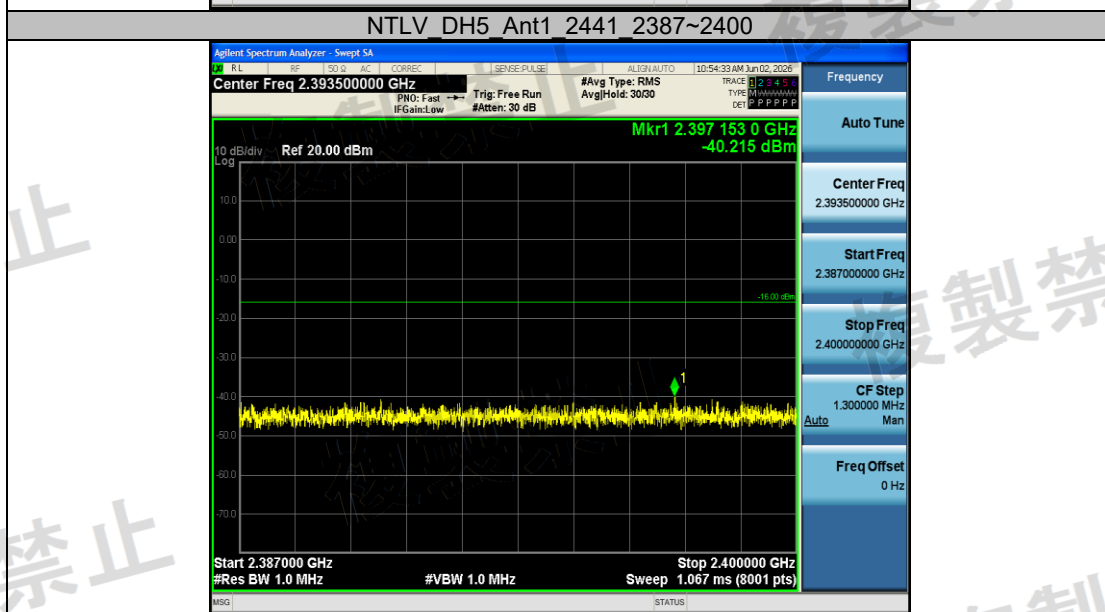


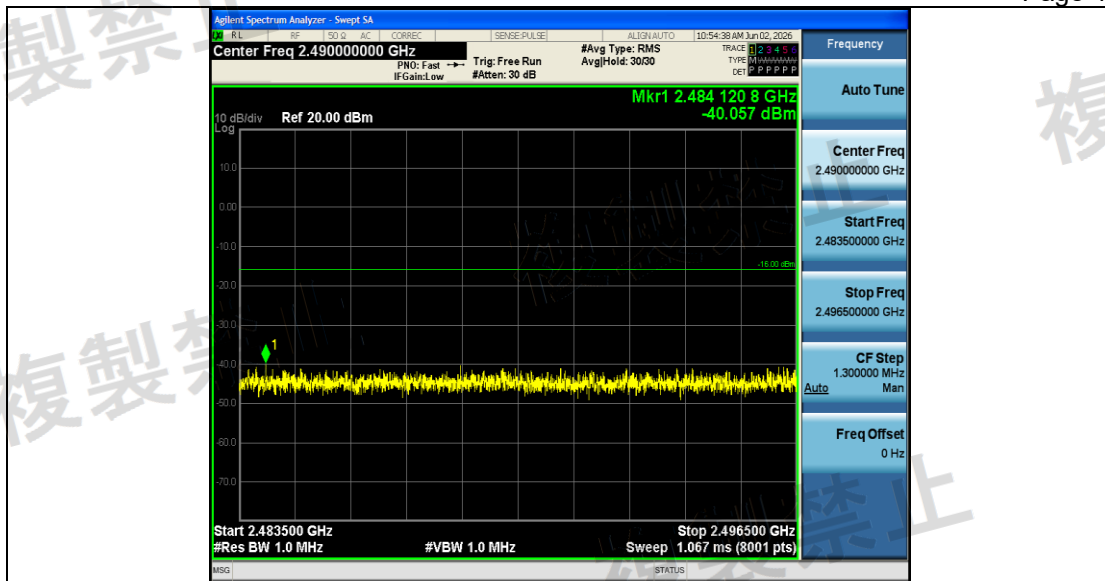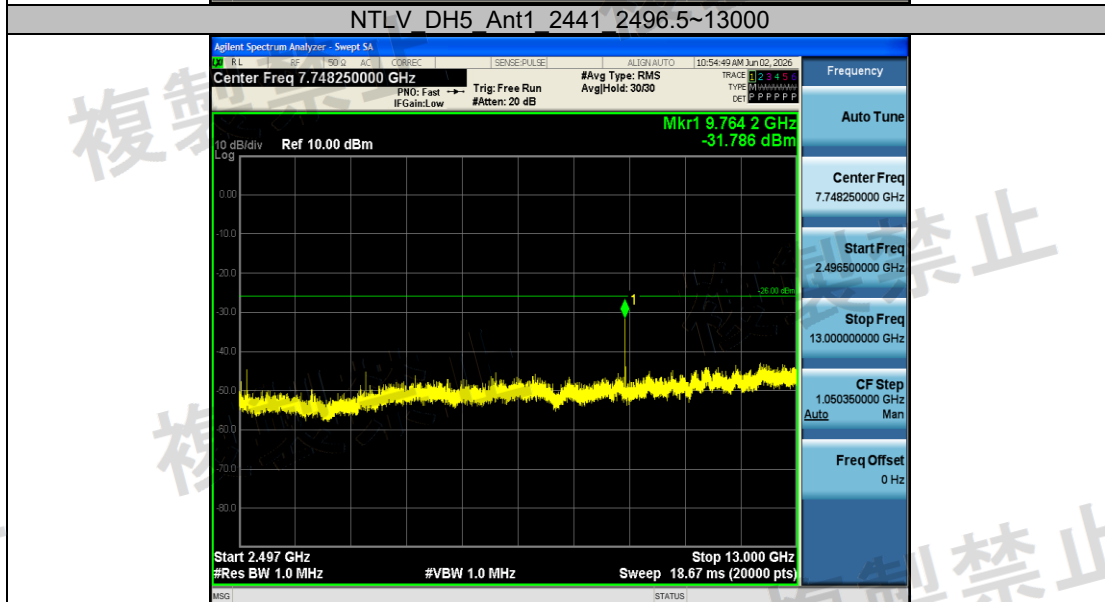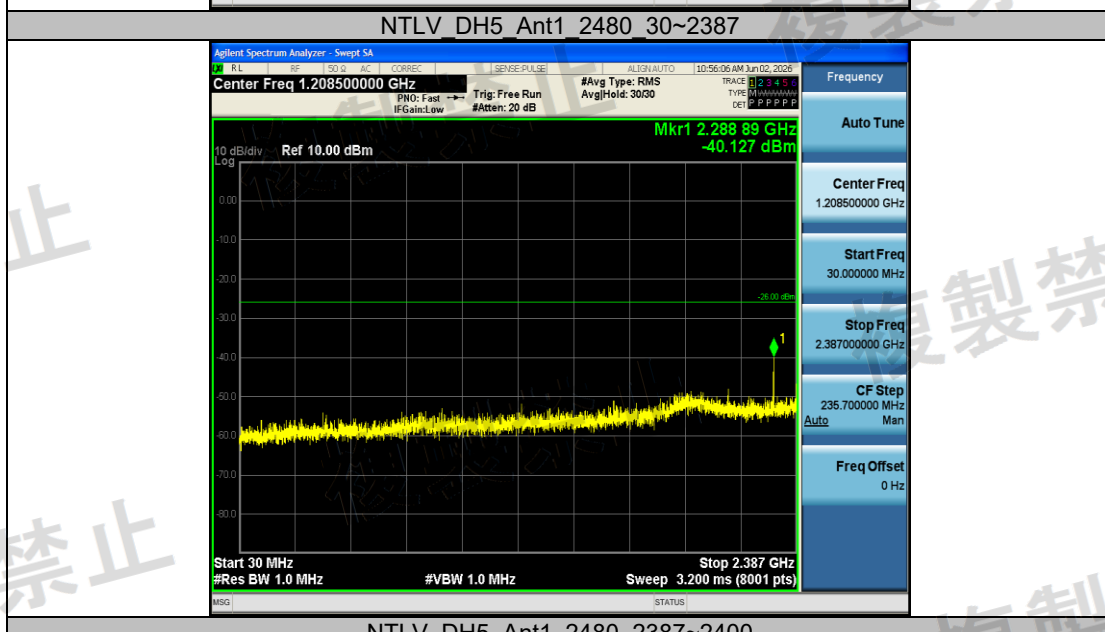

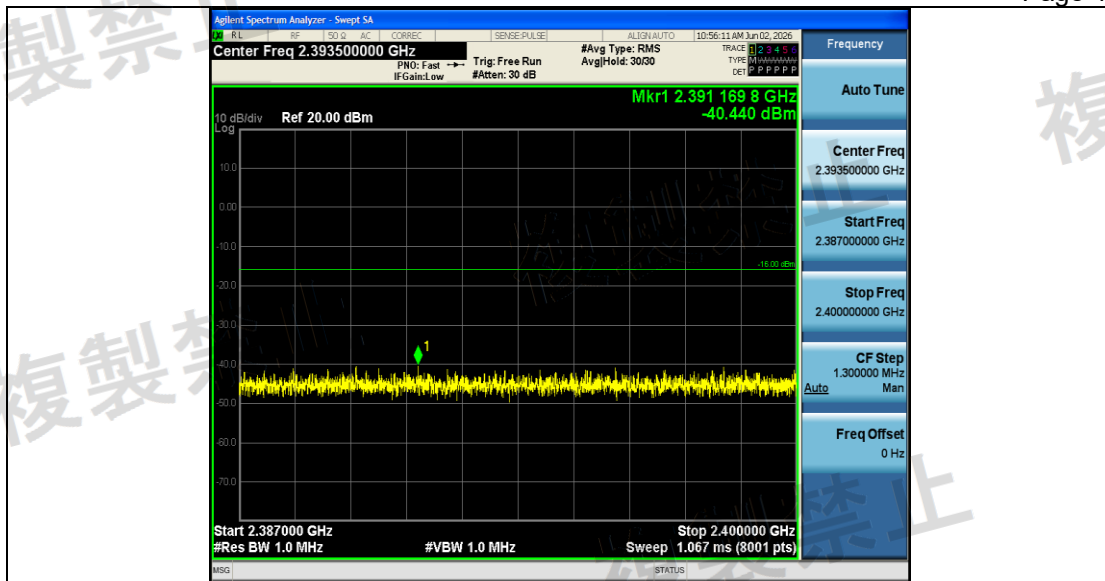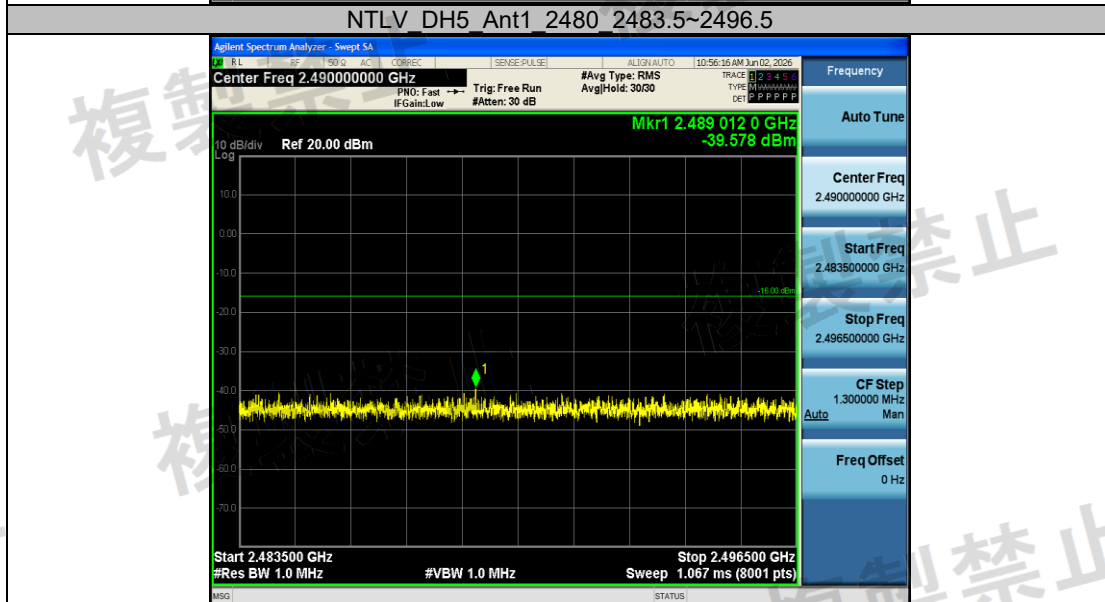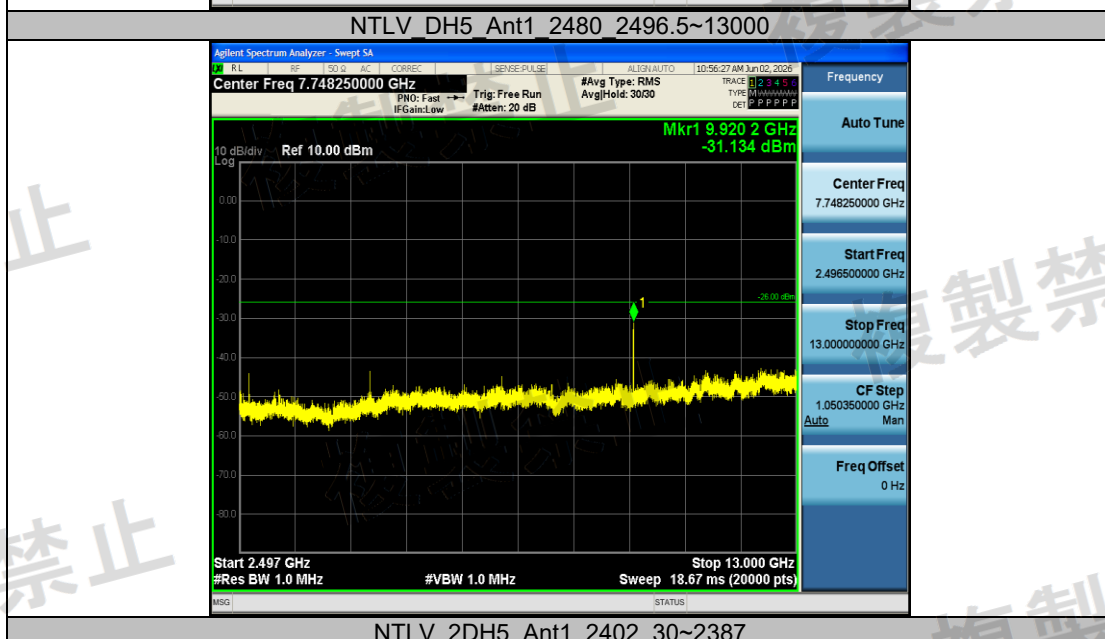


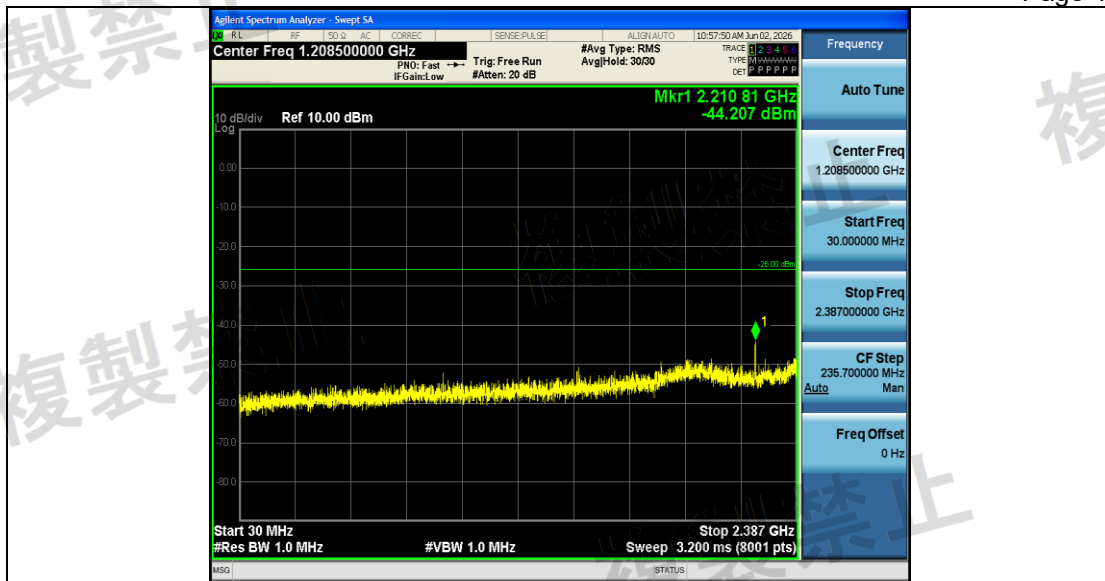

NTLV 2DH5 Ant1 2402 2387~2400



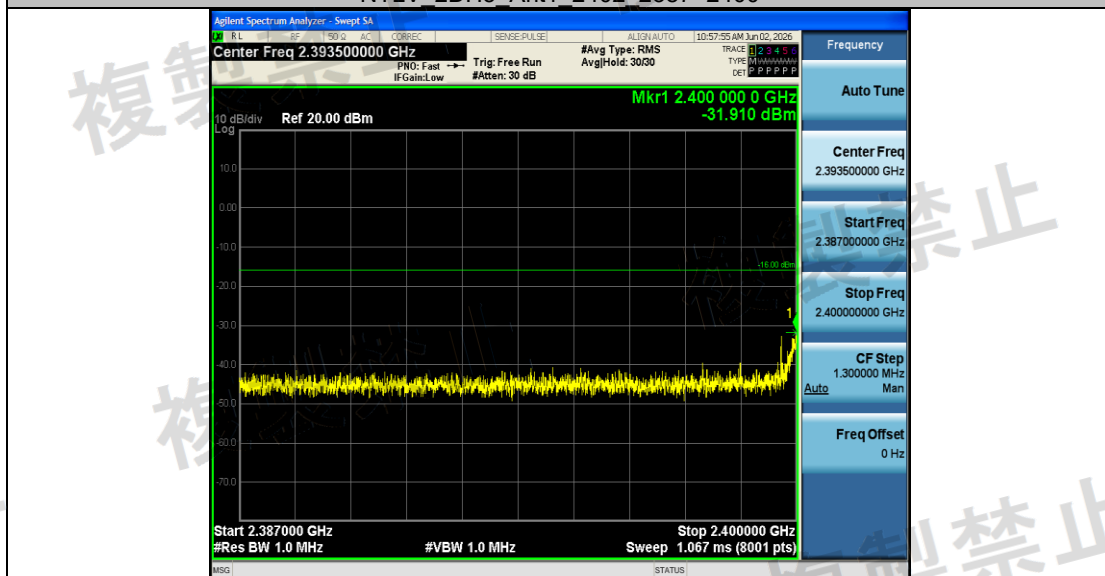



NTLV 2DH5 Ant1 2402 2483.5~2496.5

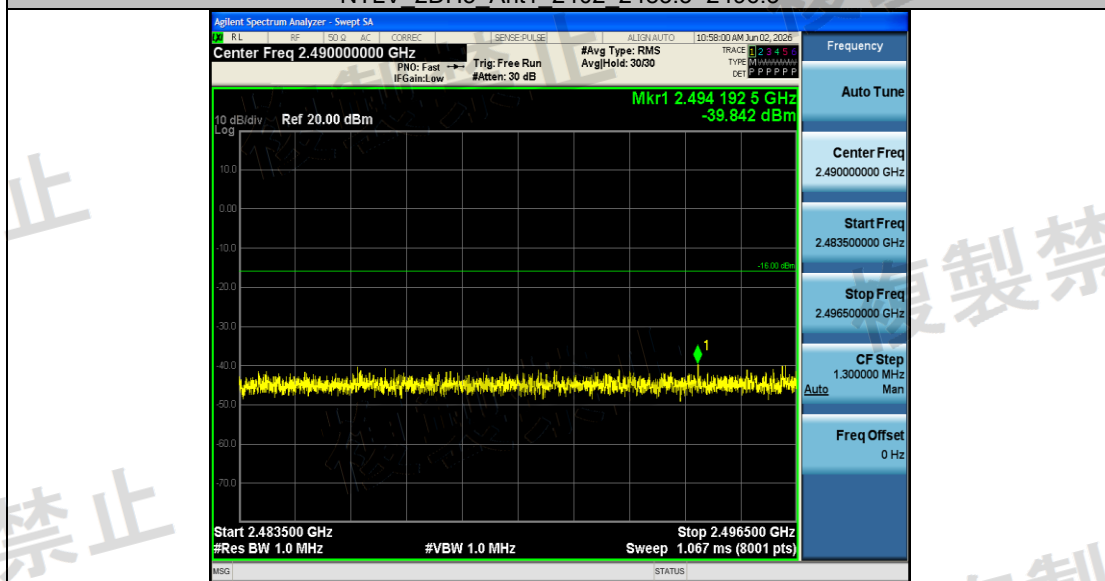



NTLV 2DH5 Ant1 2402 2496.5~13000




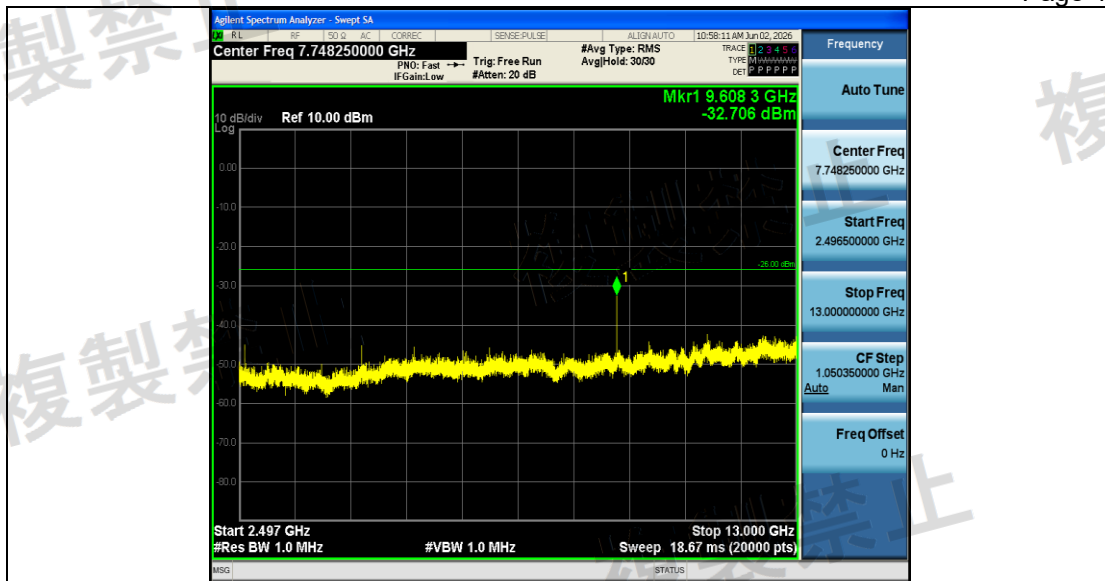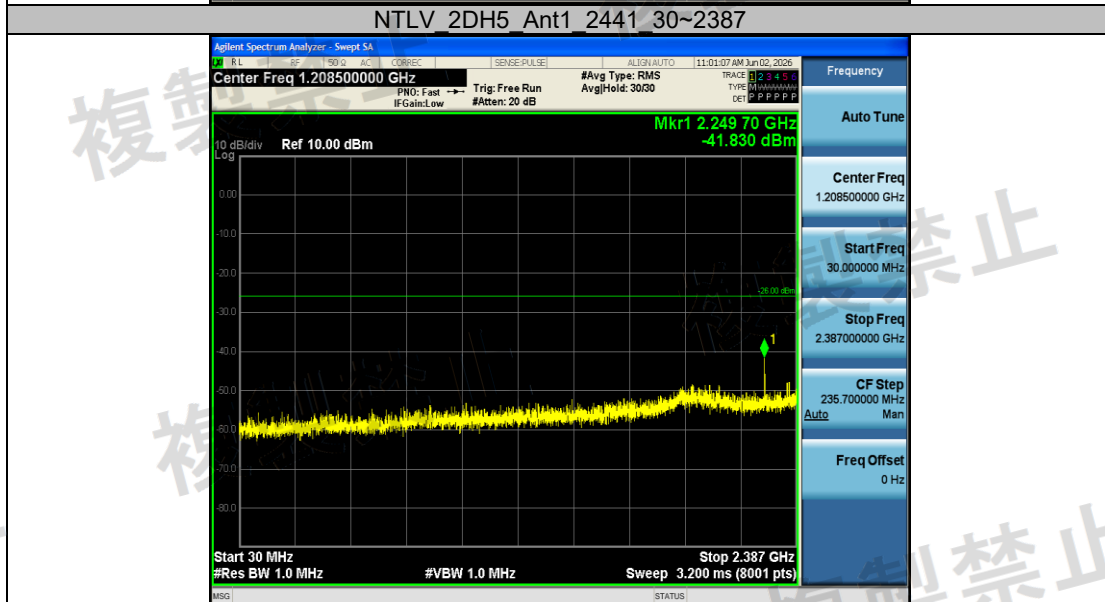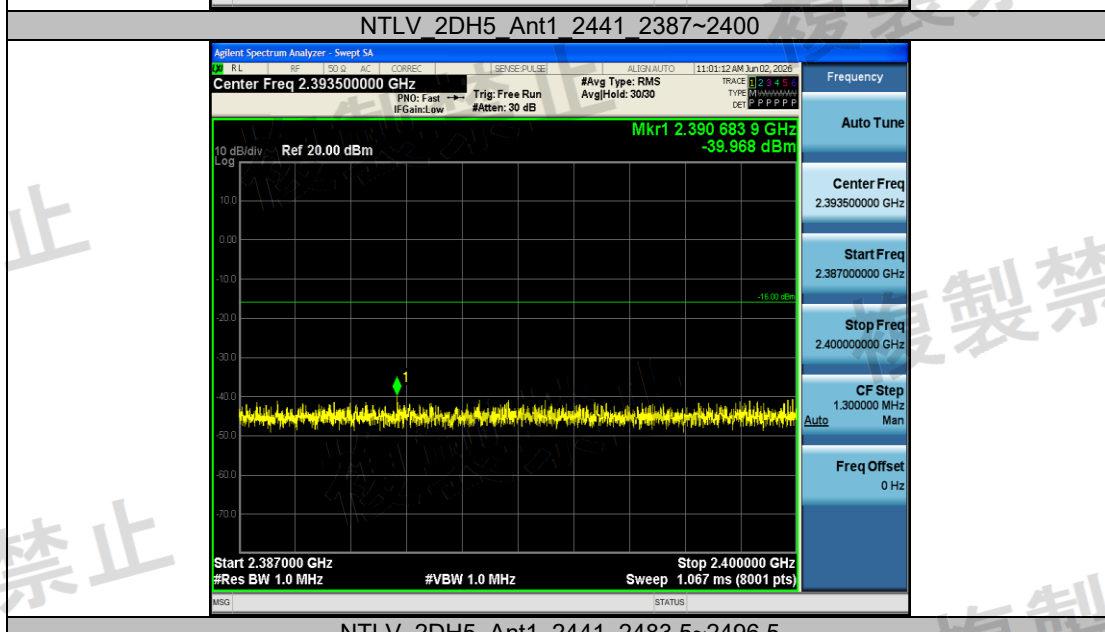


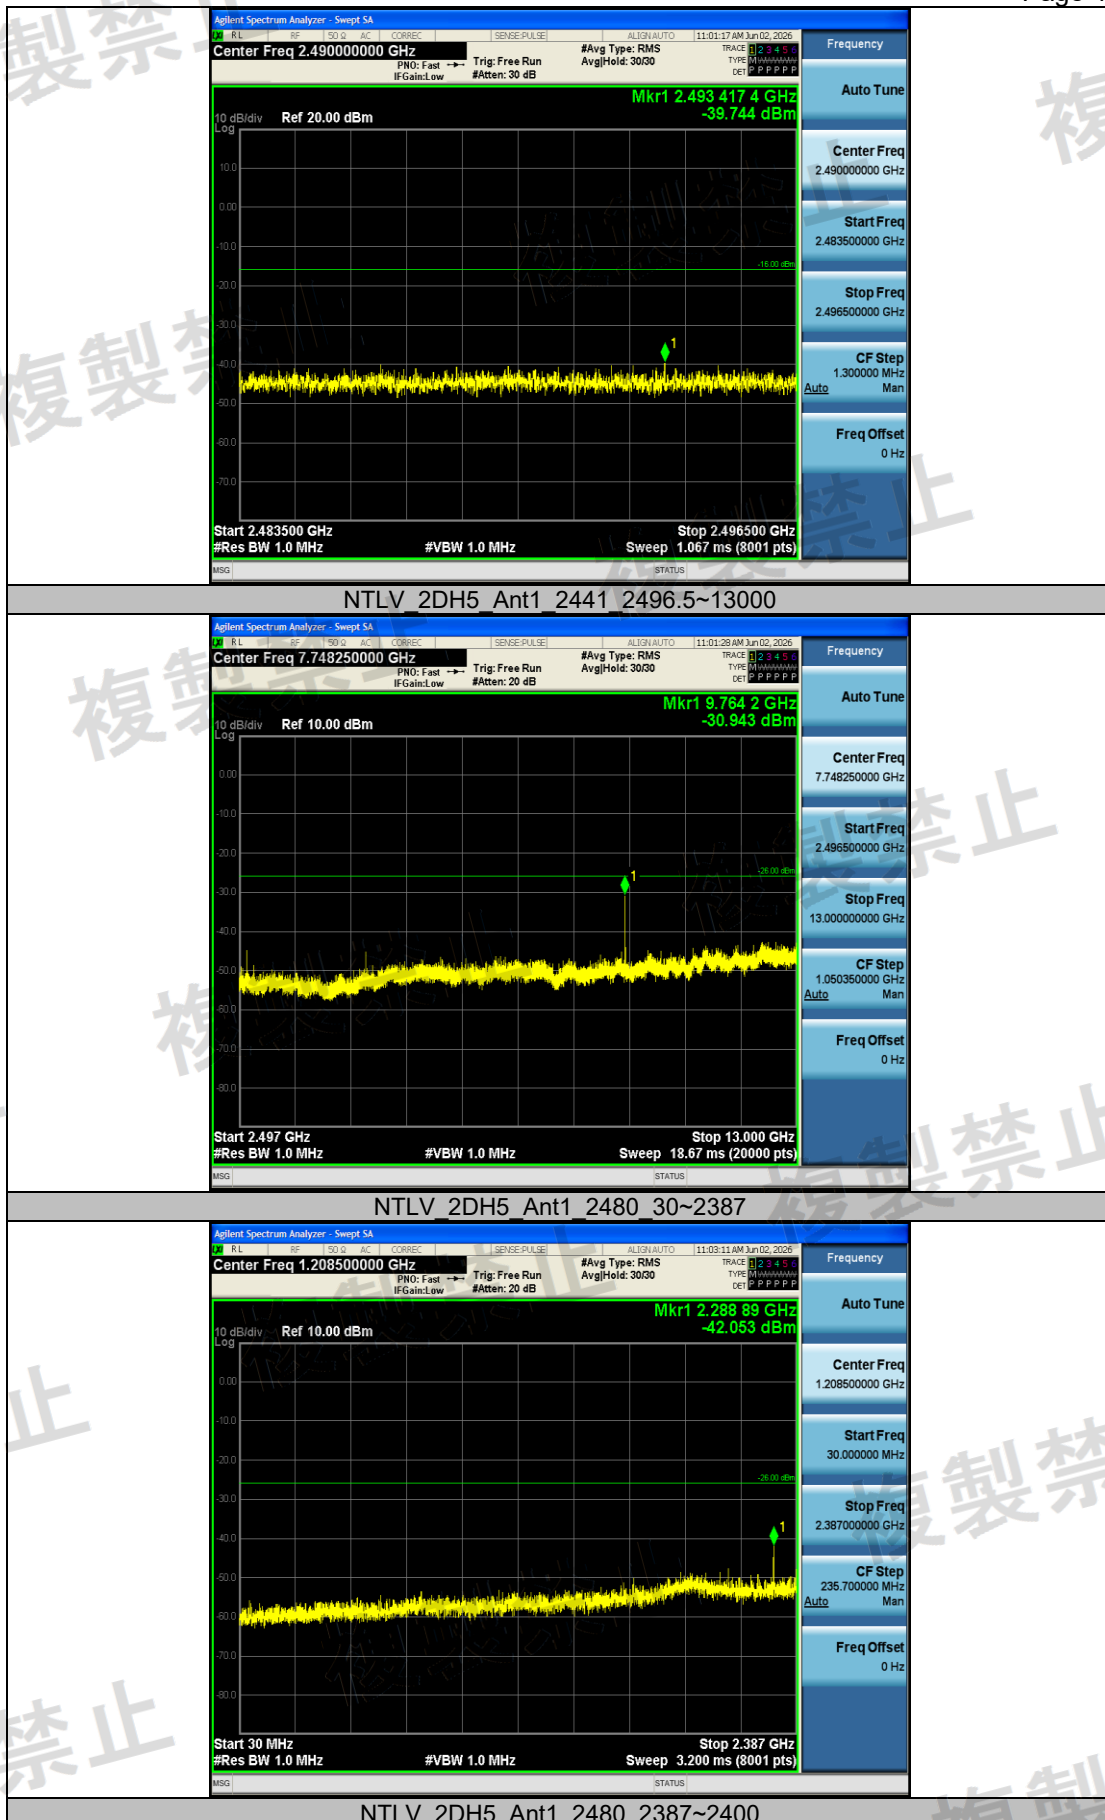


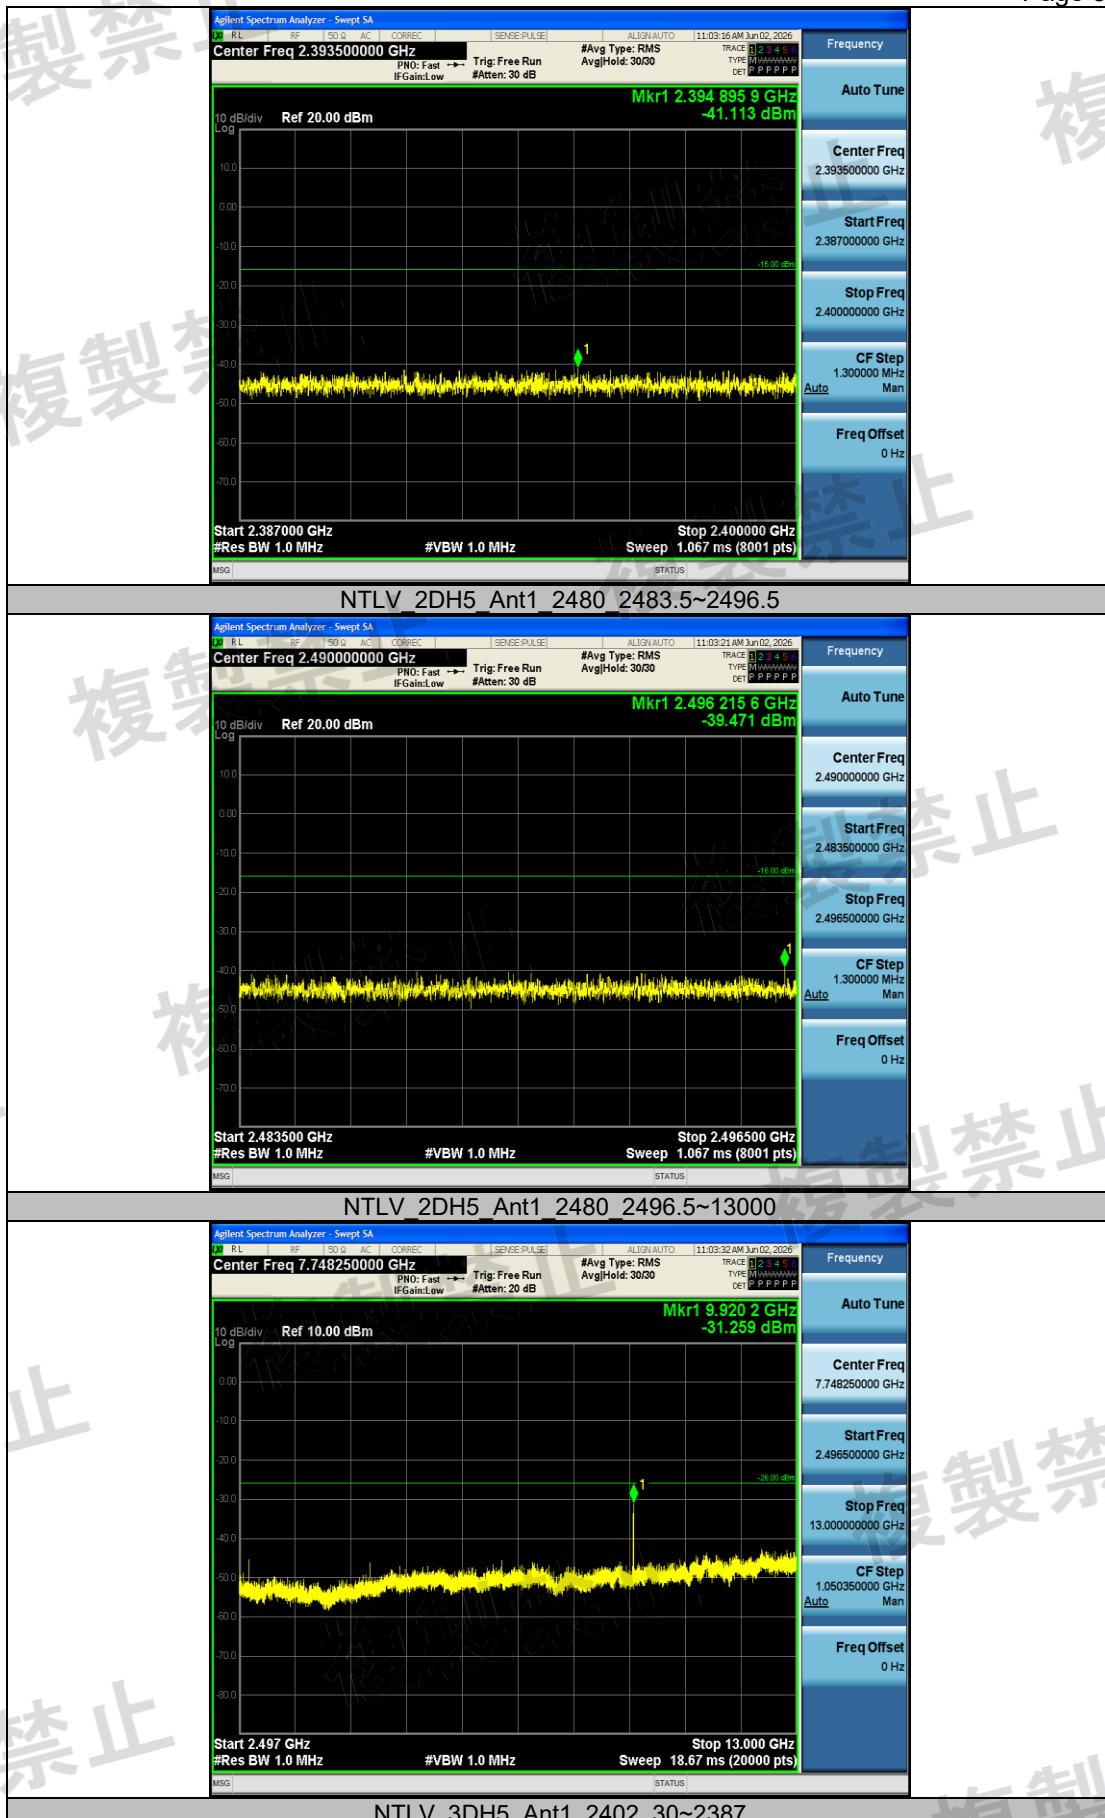


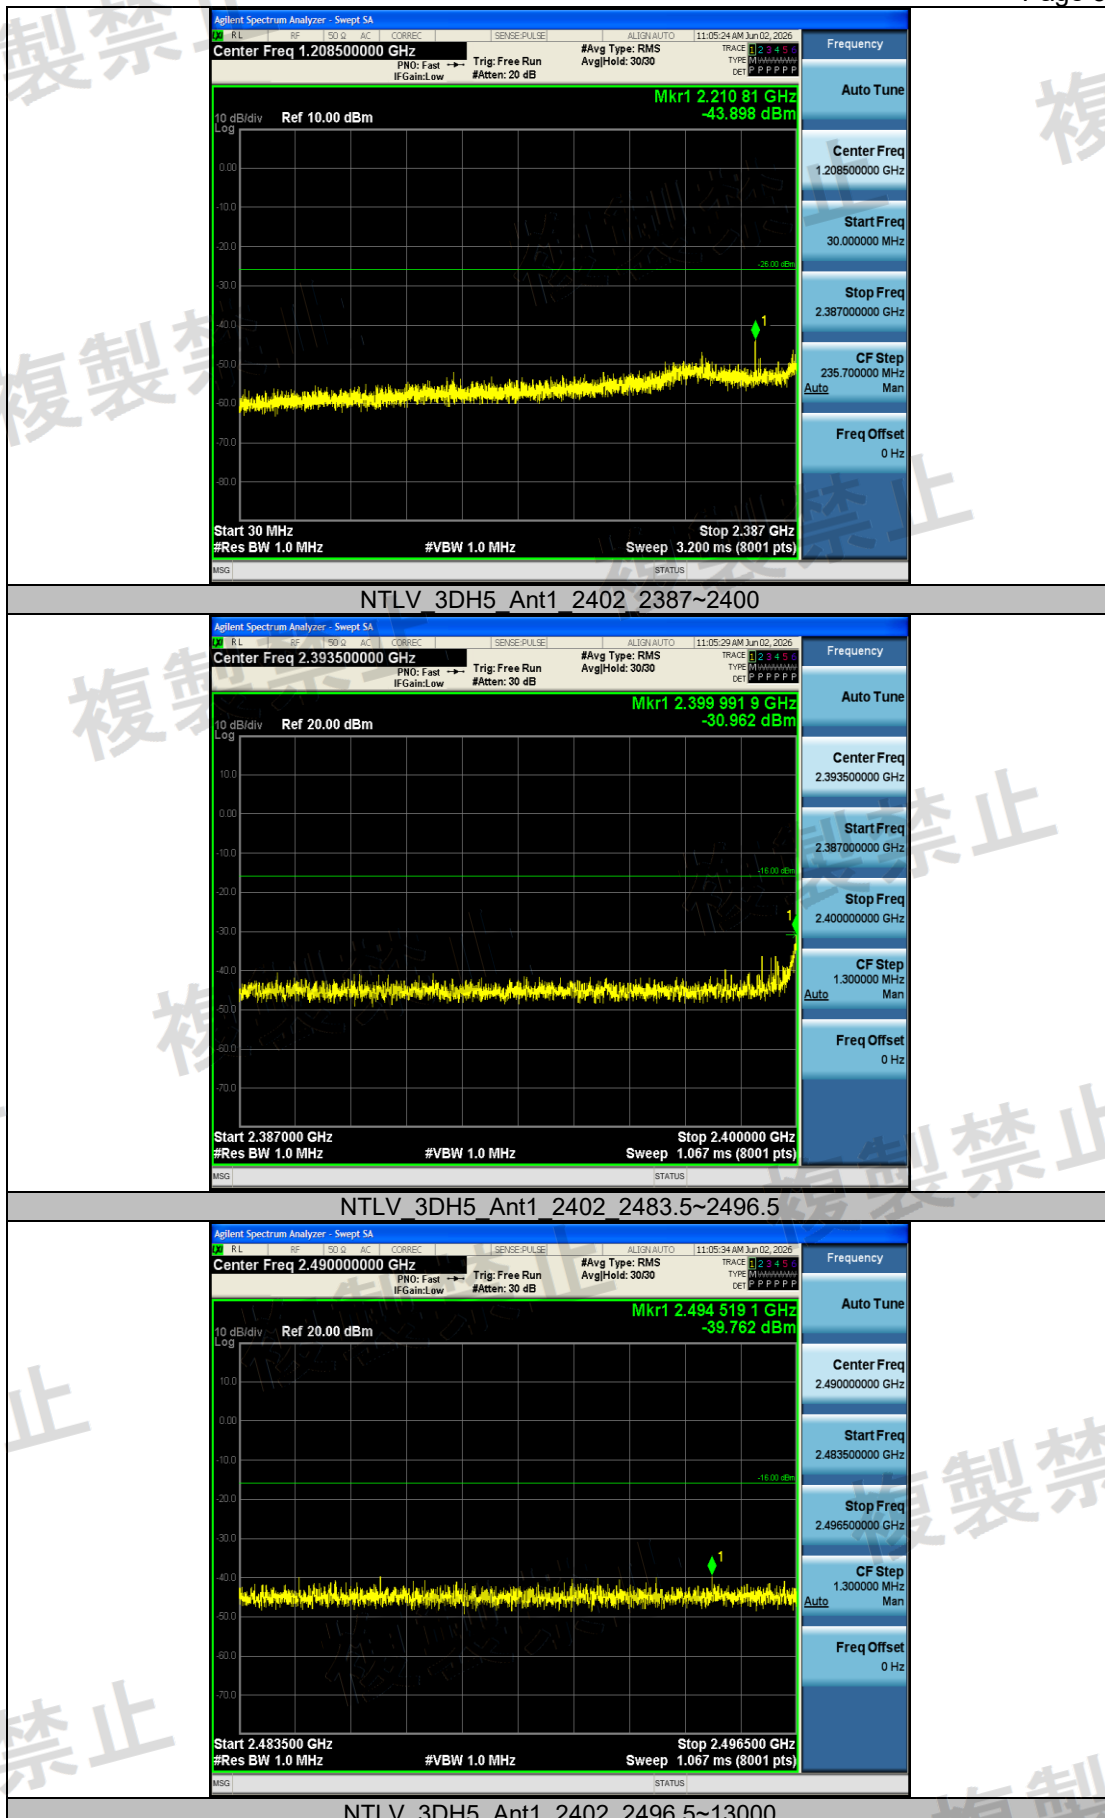

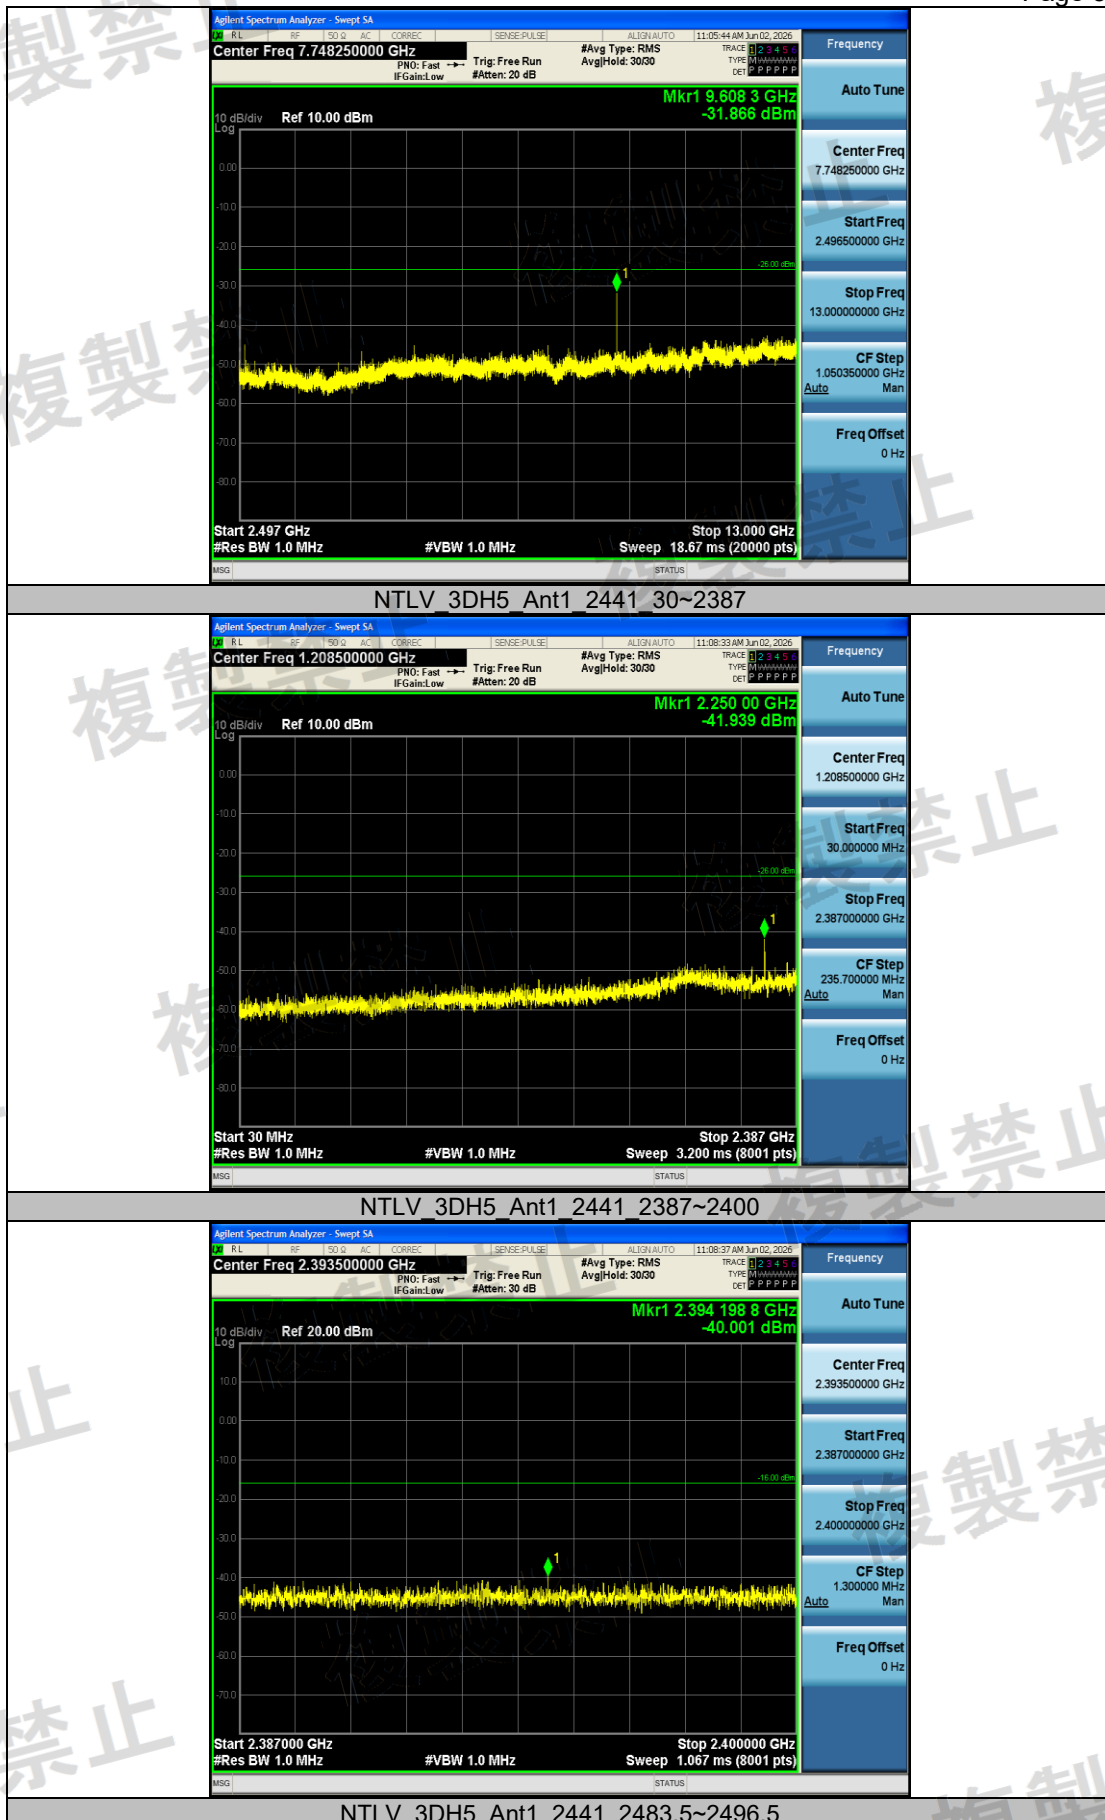


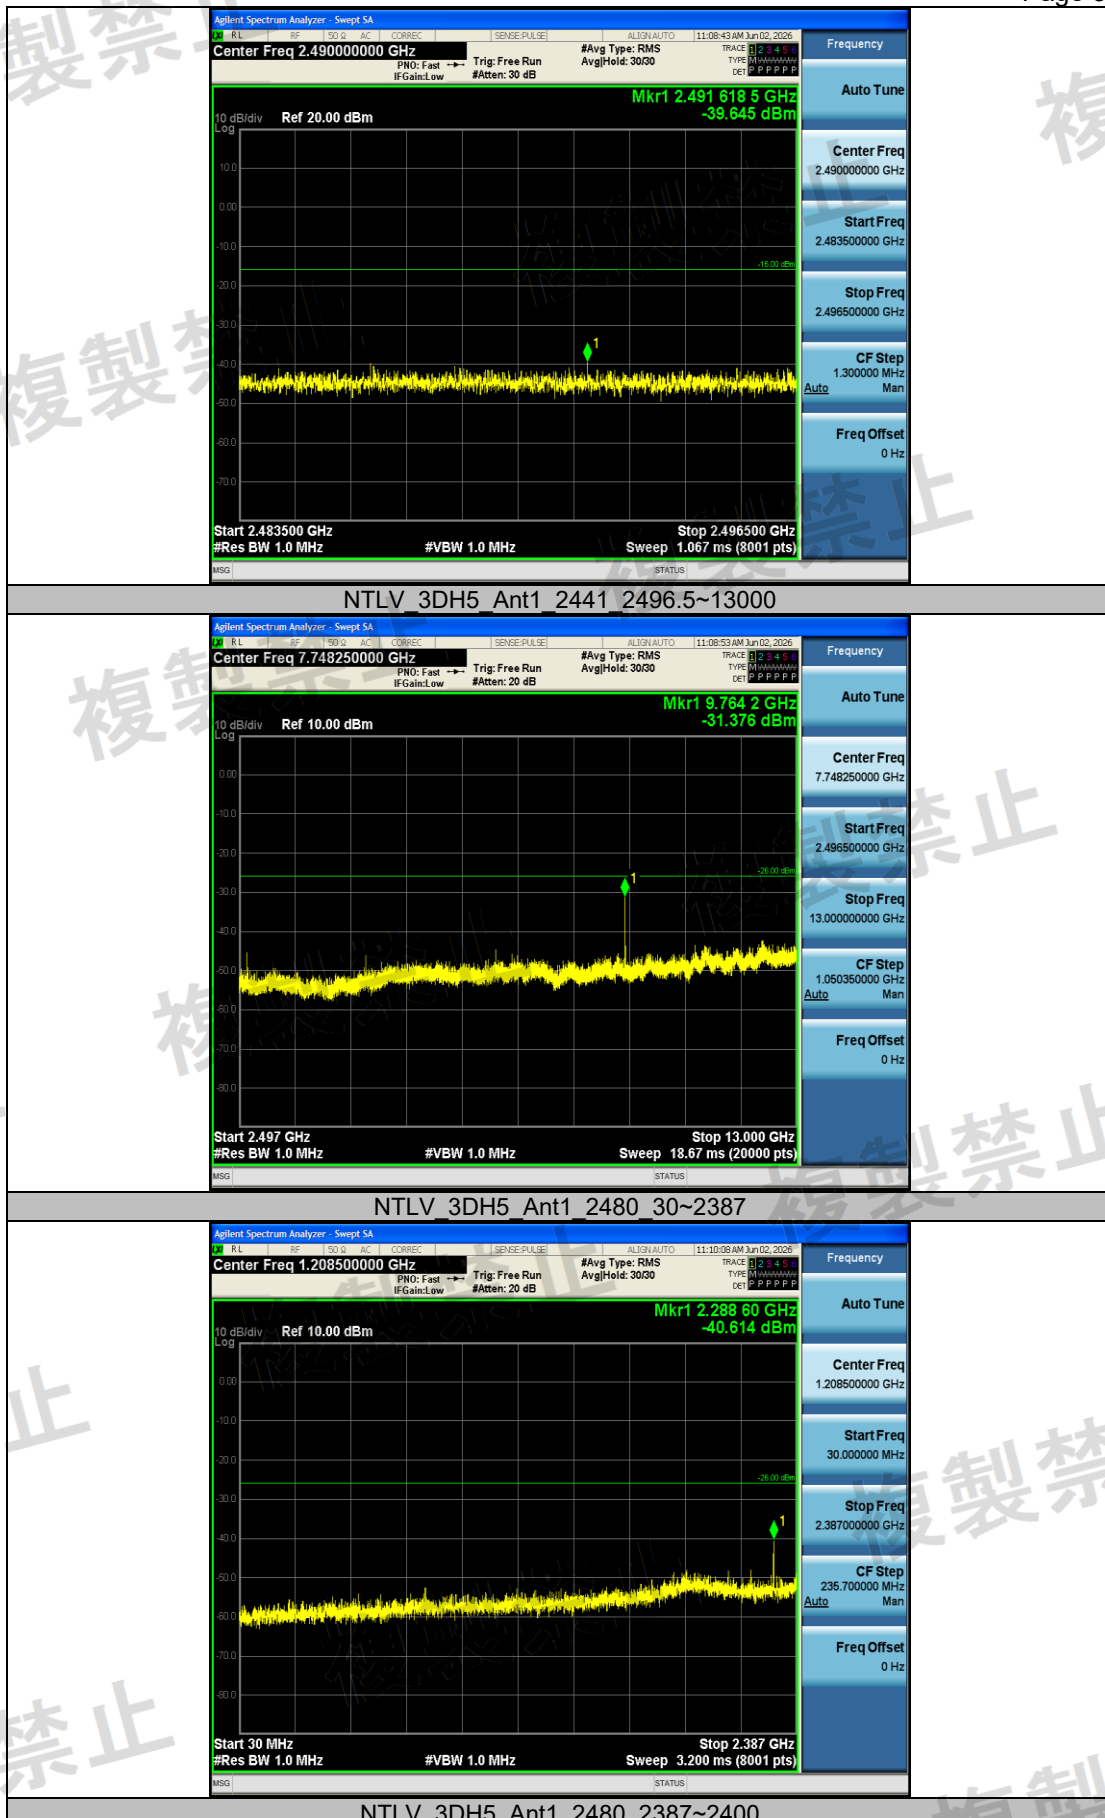

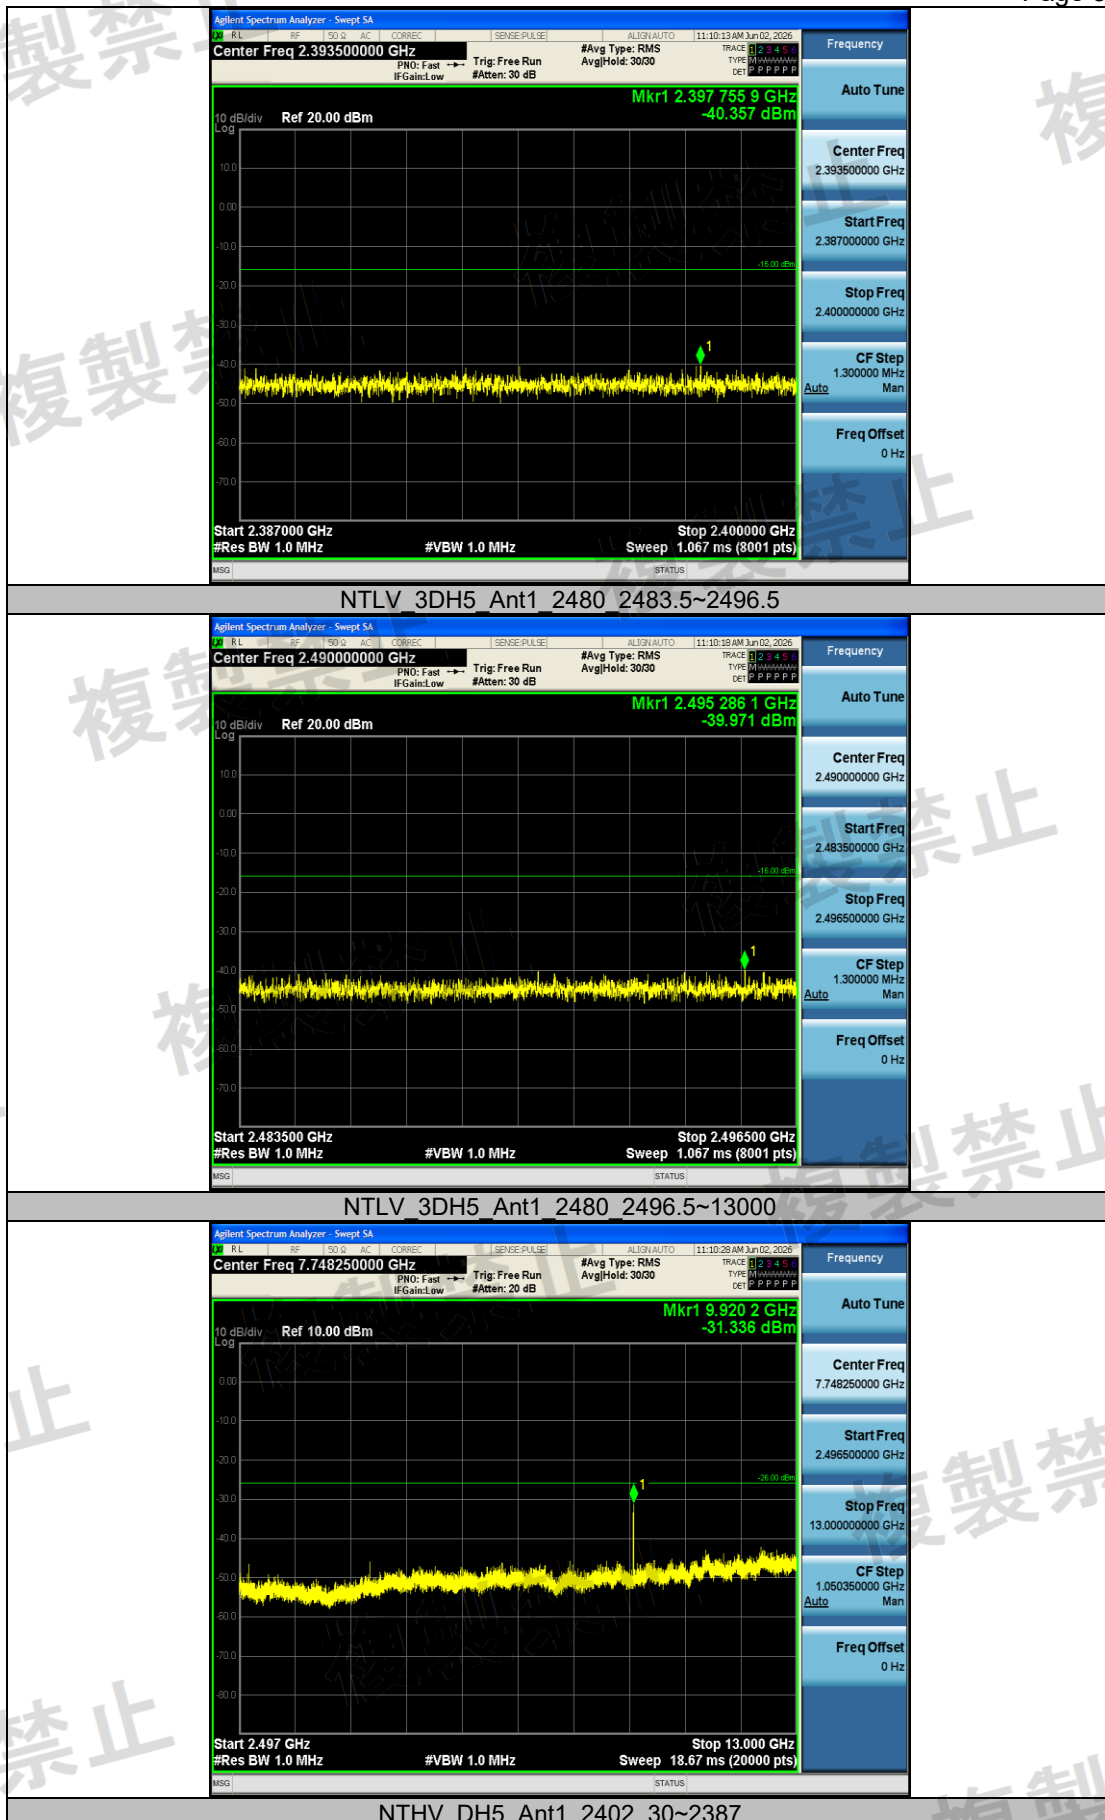


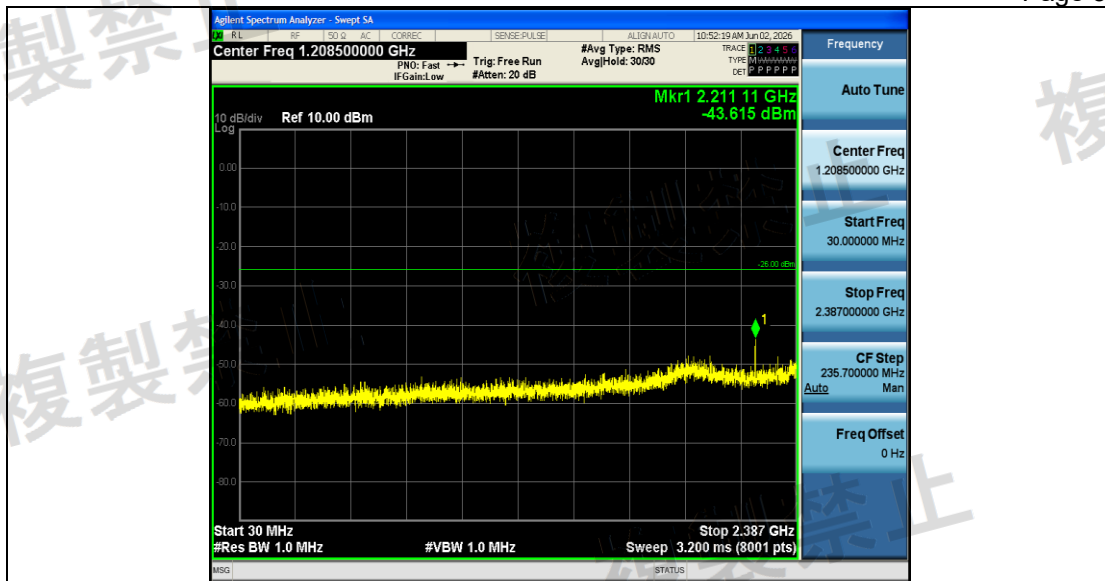

NTHV_DH5_Ant1_2402_2387~2400

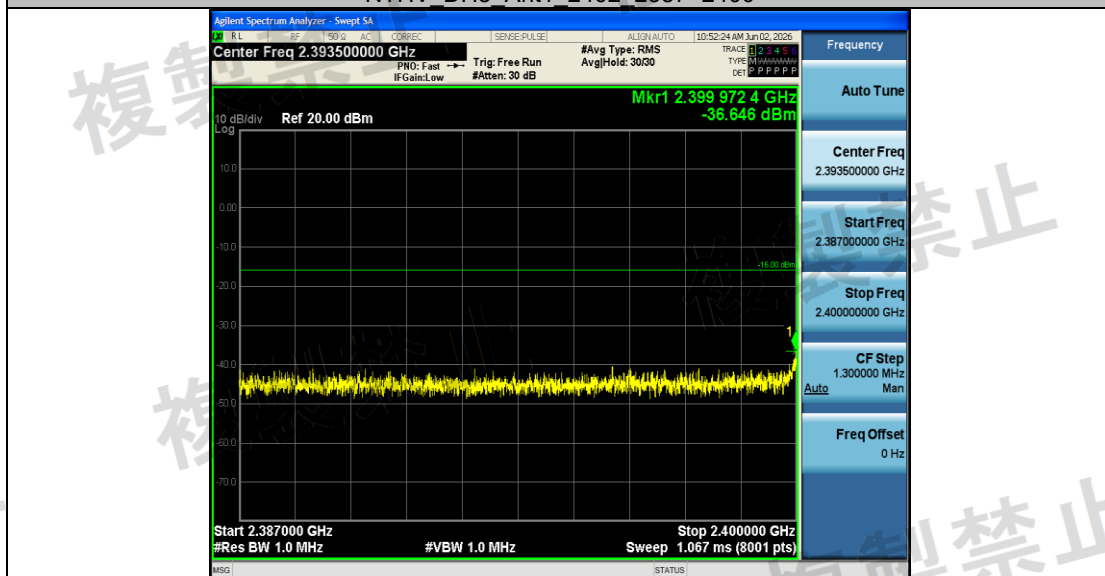



NTHV_DH5_Ant1_2402_2483.5~2496.5

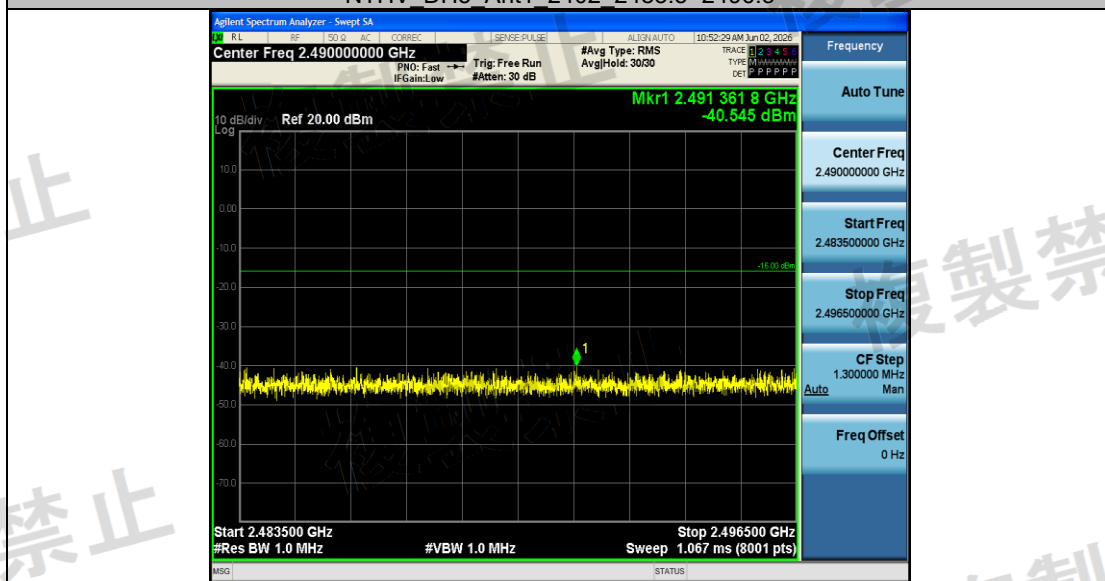


NTHV_DH5_Ant1_2402_2496.5~13000



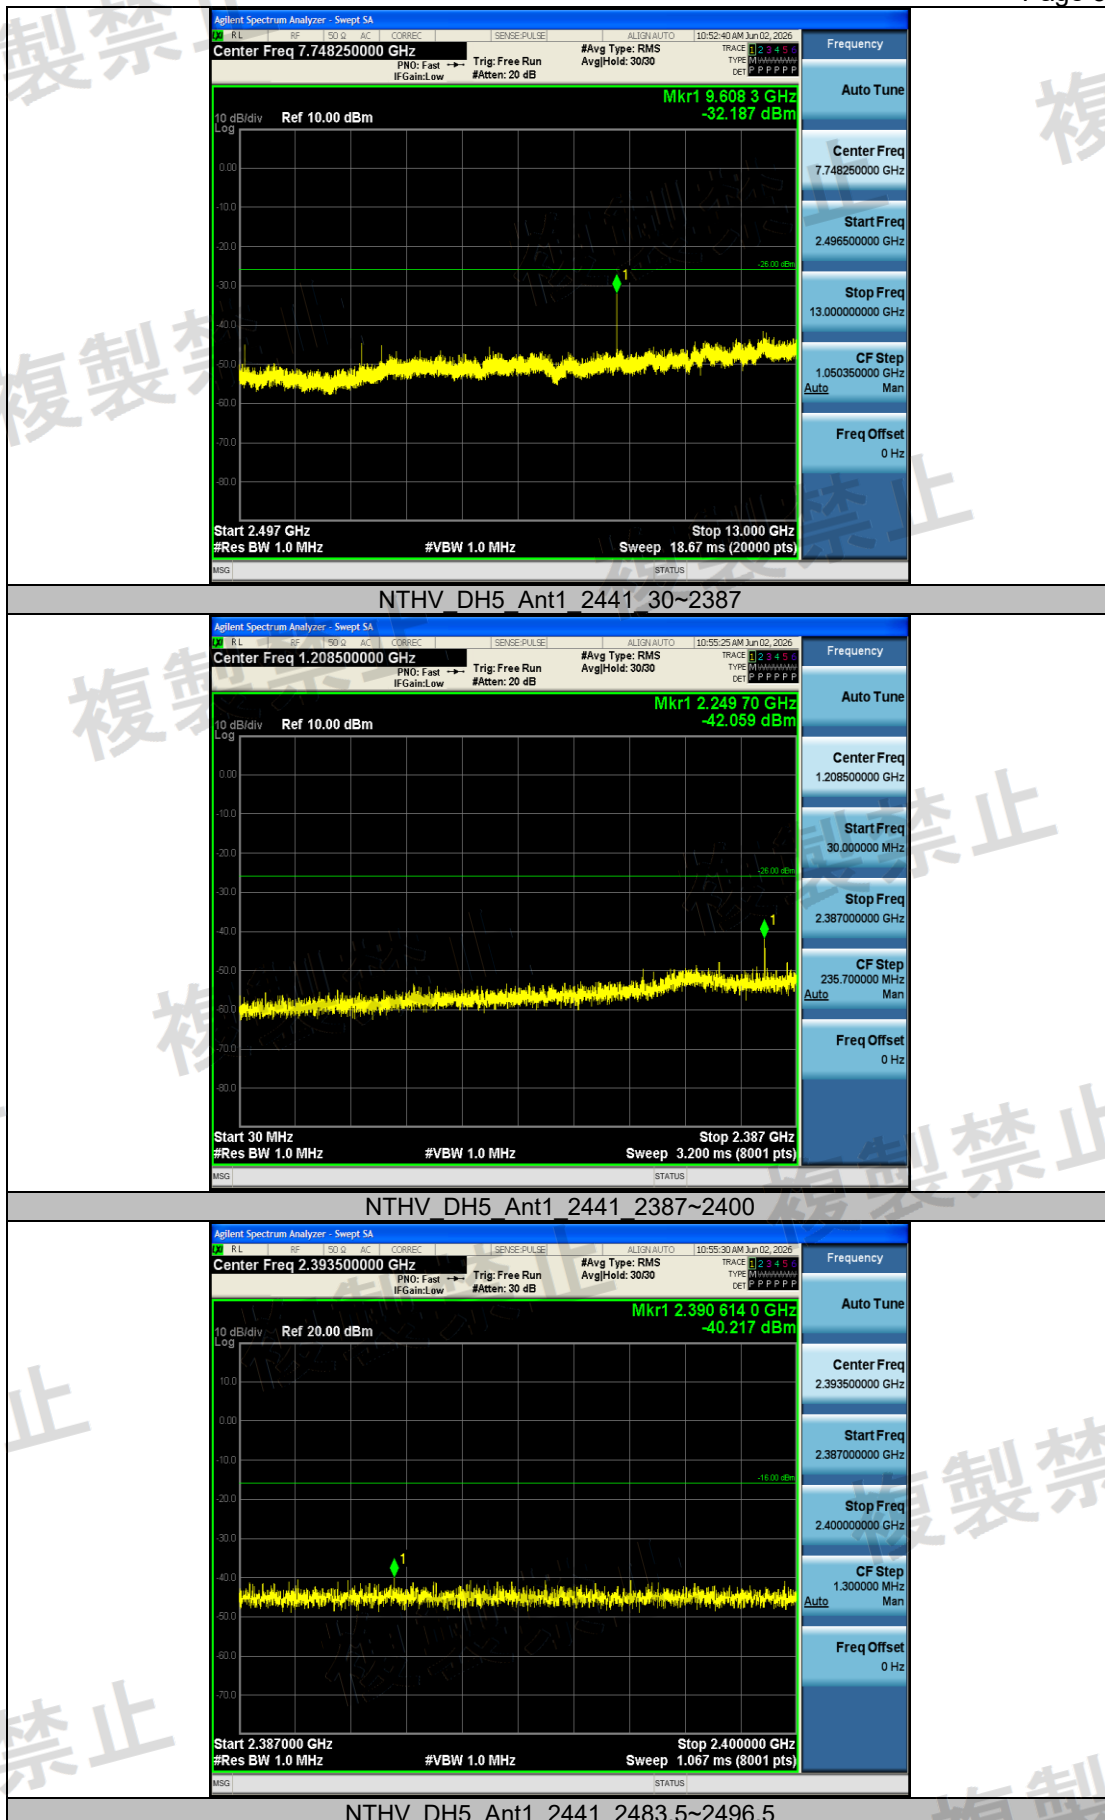


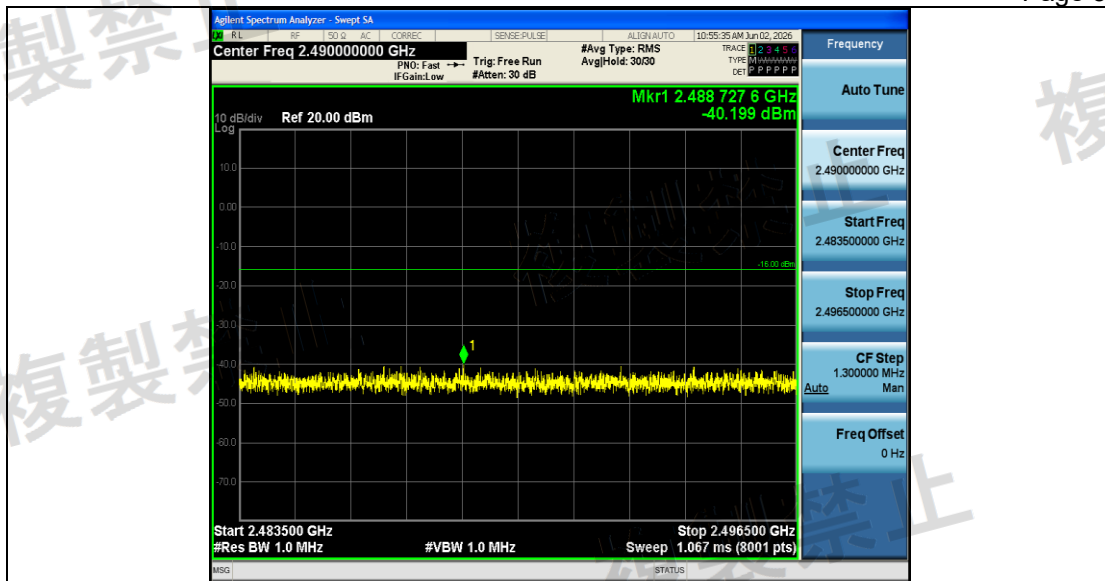

NTHV DH5 Ant1 2441 2496.5~13000

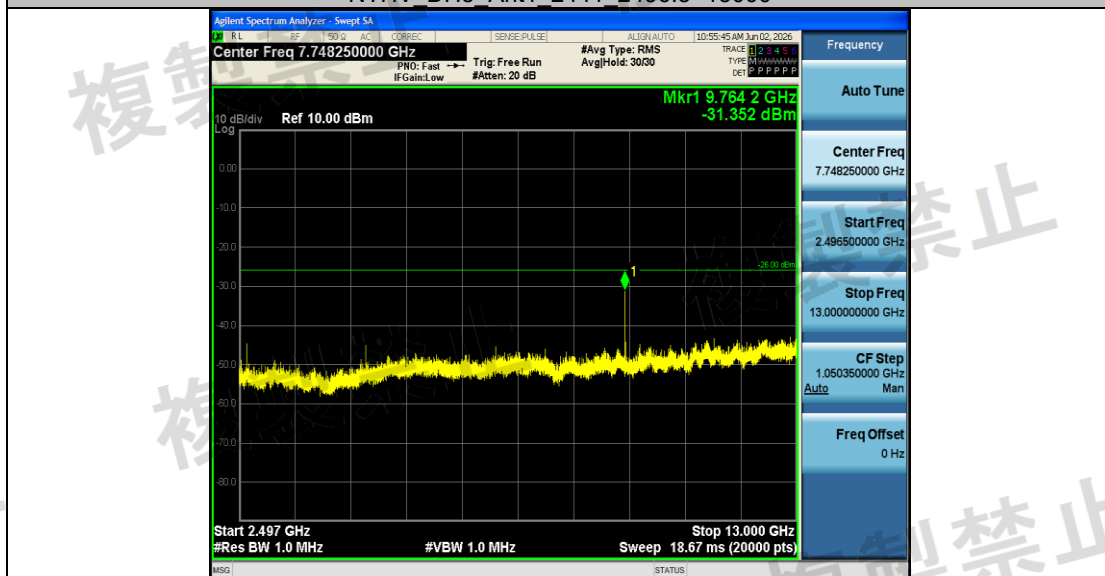



NTHV DH5 Ant1 2480 30~2387

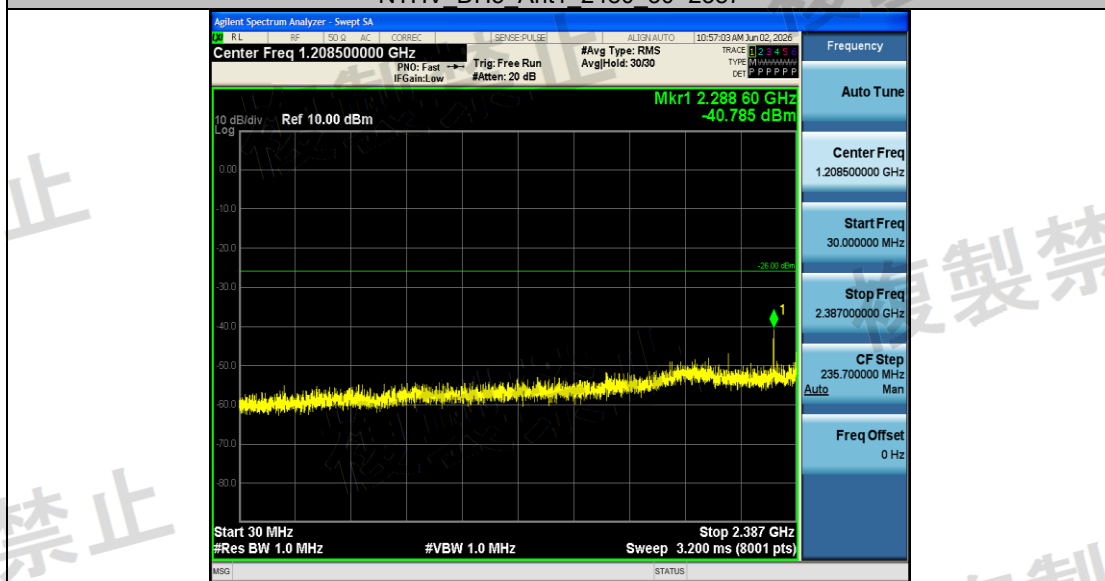





NTHV DH5 Ant1 2480 2387~2400




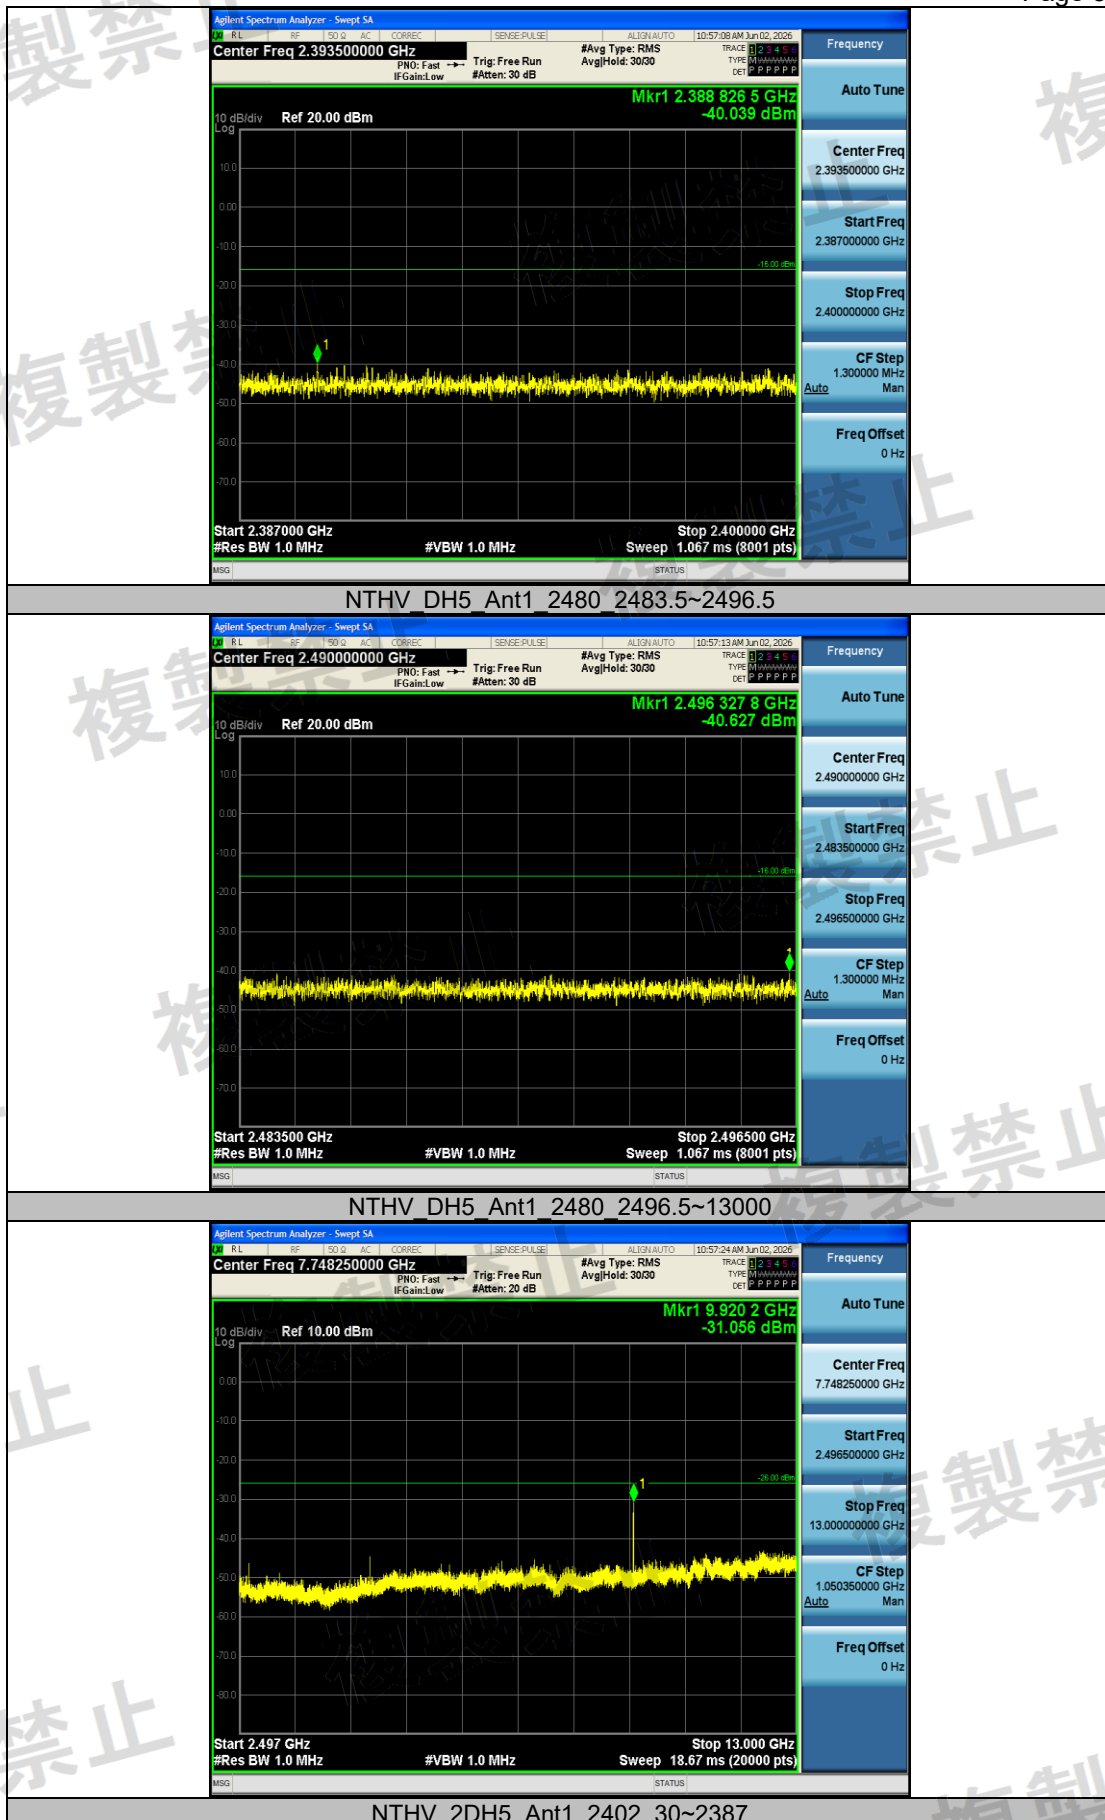


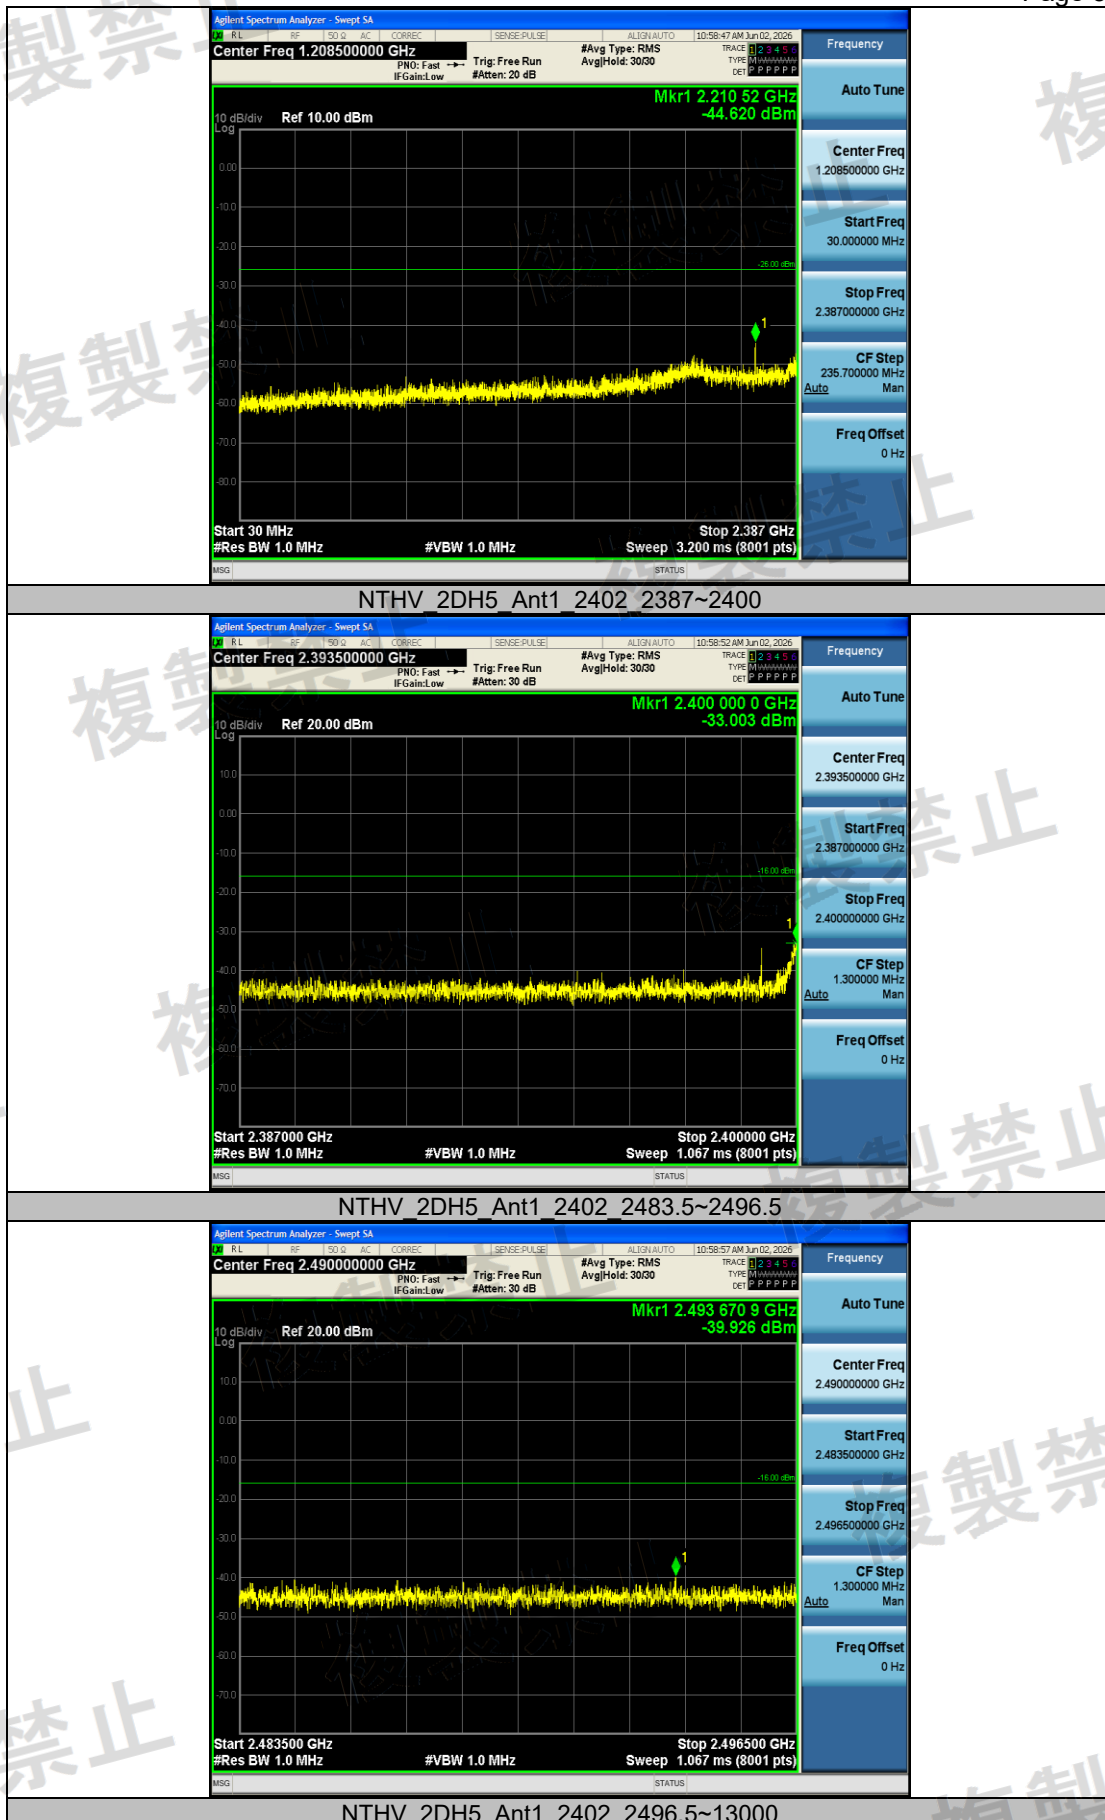


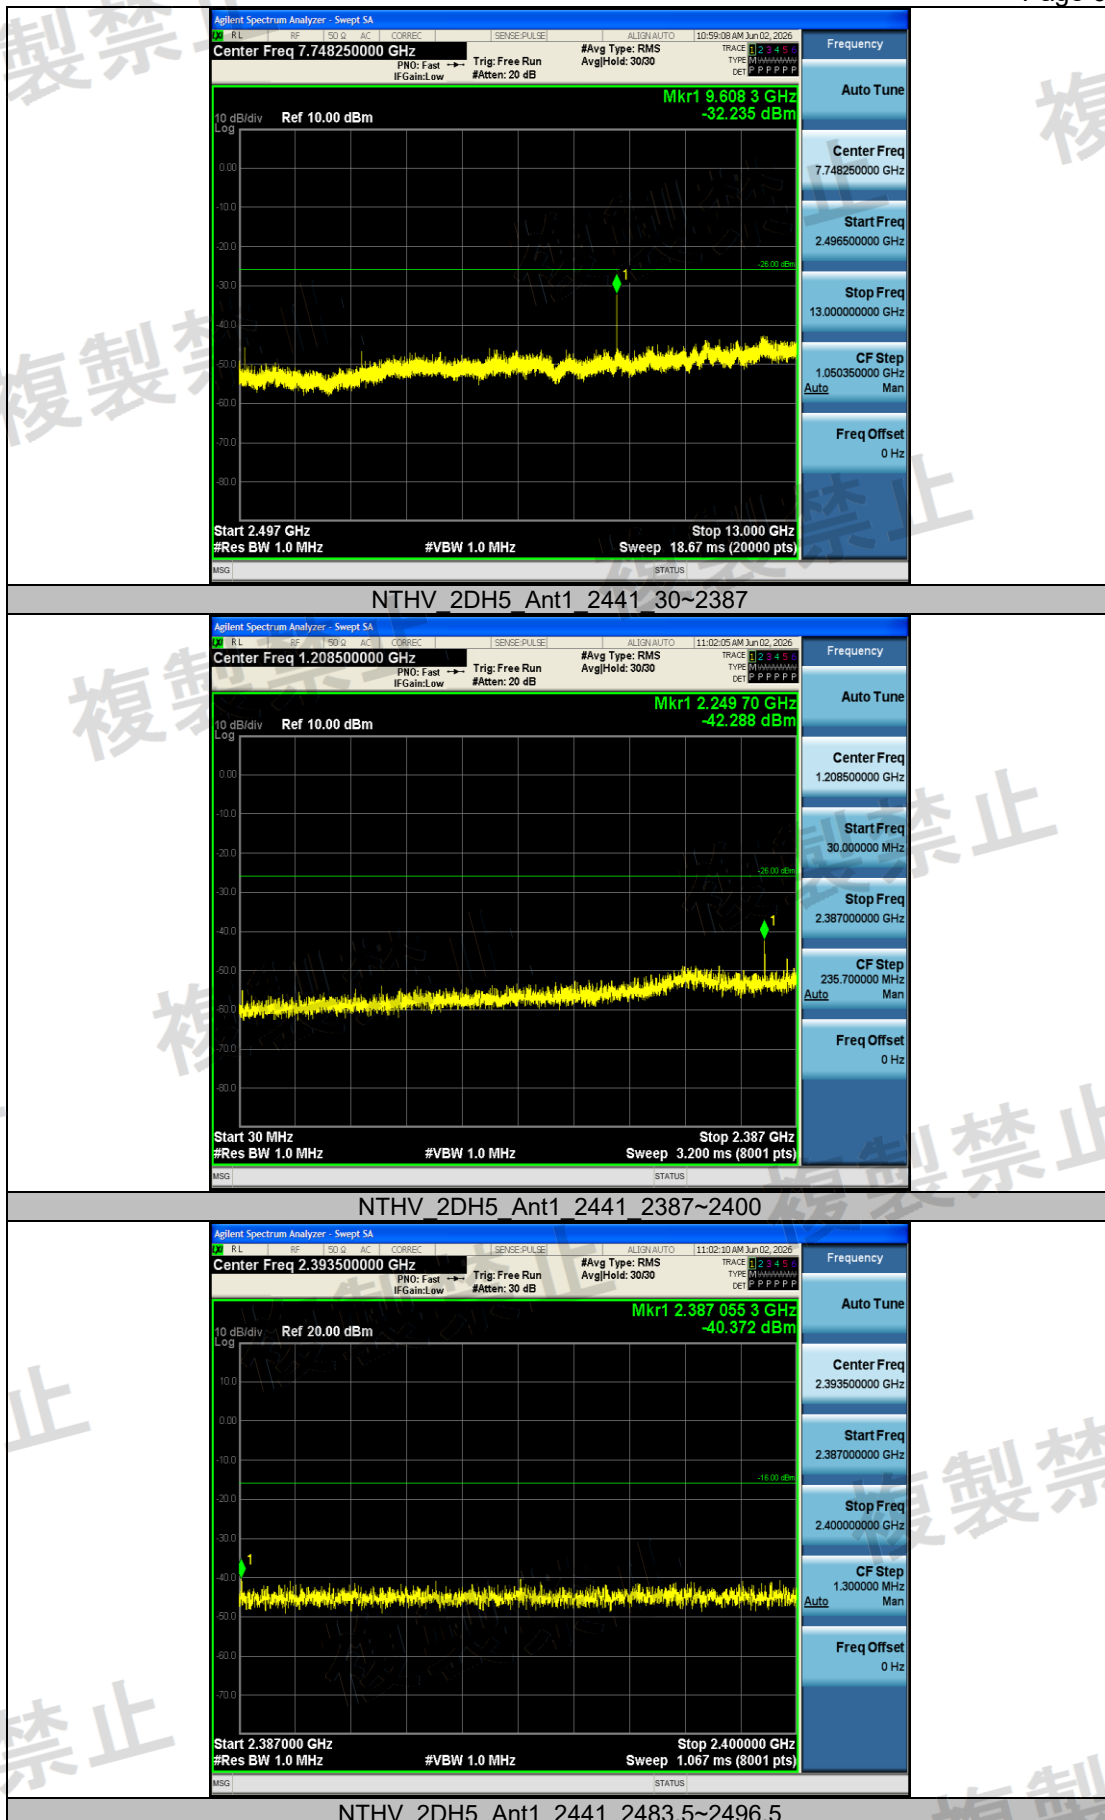


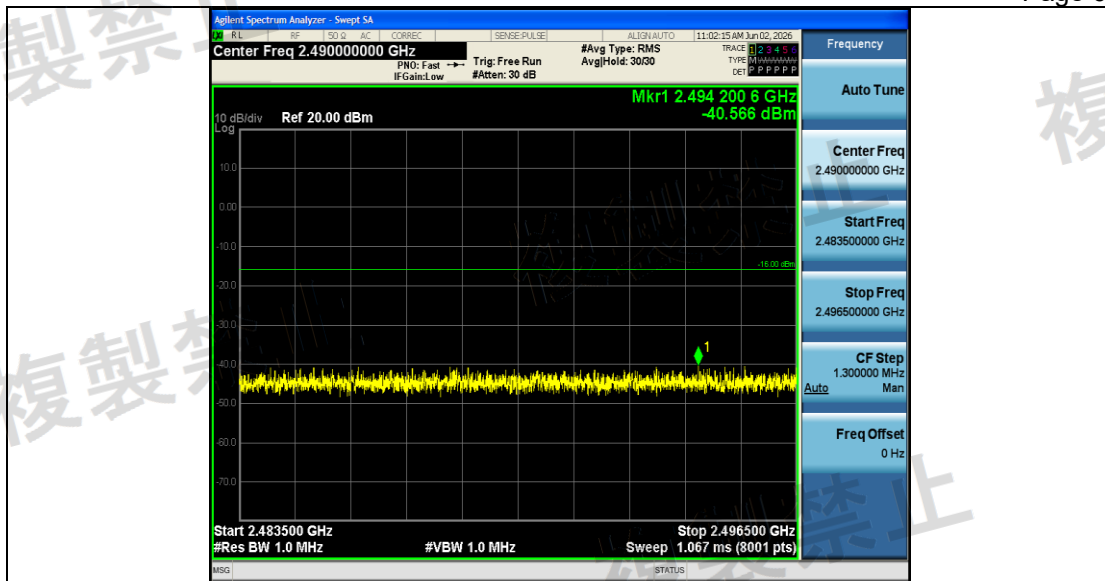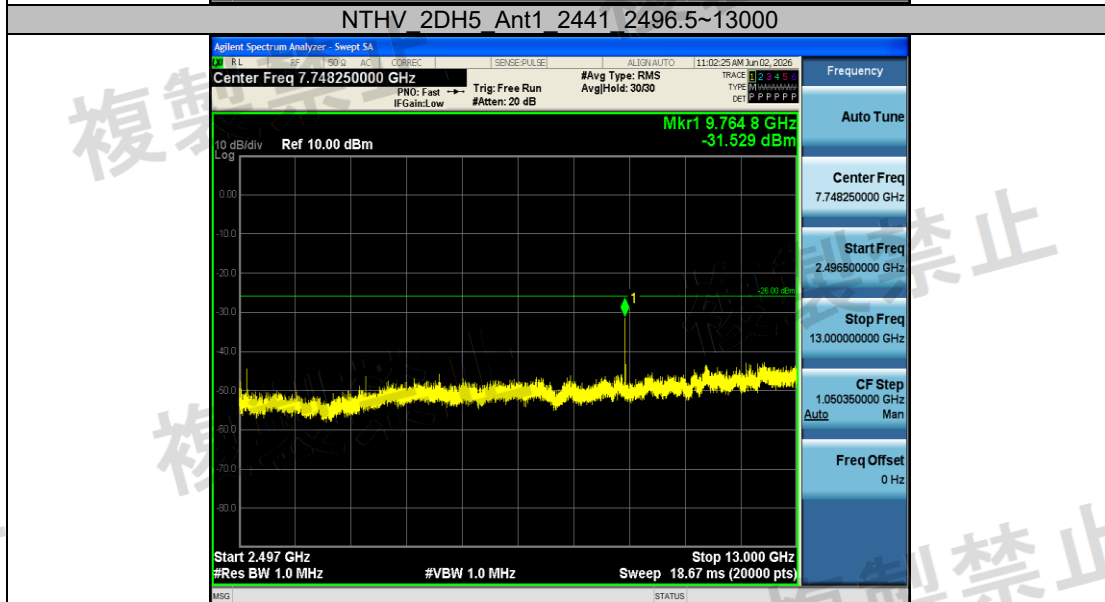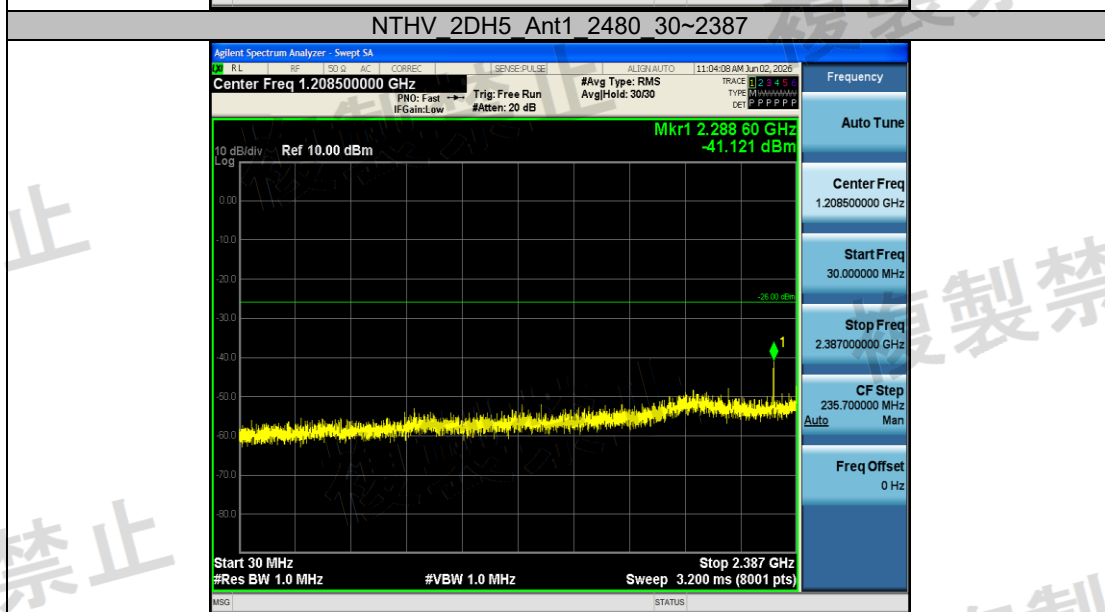

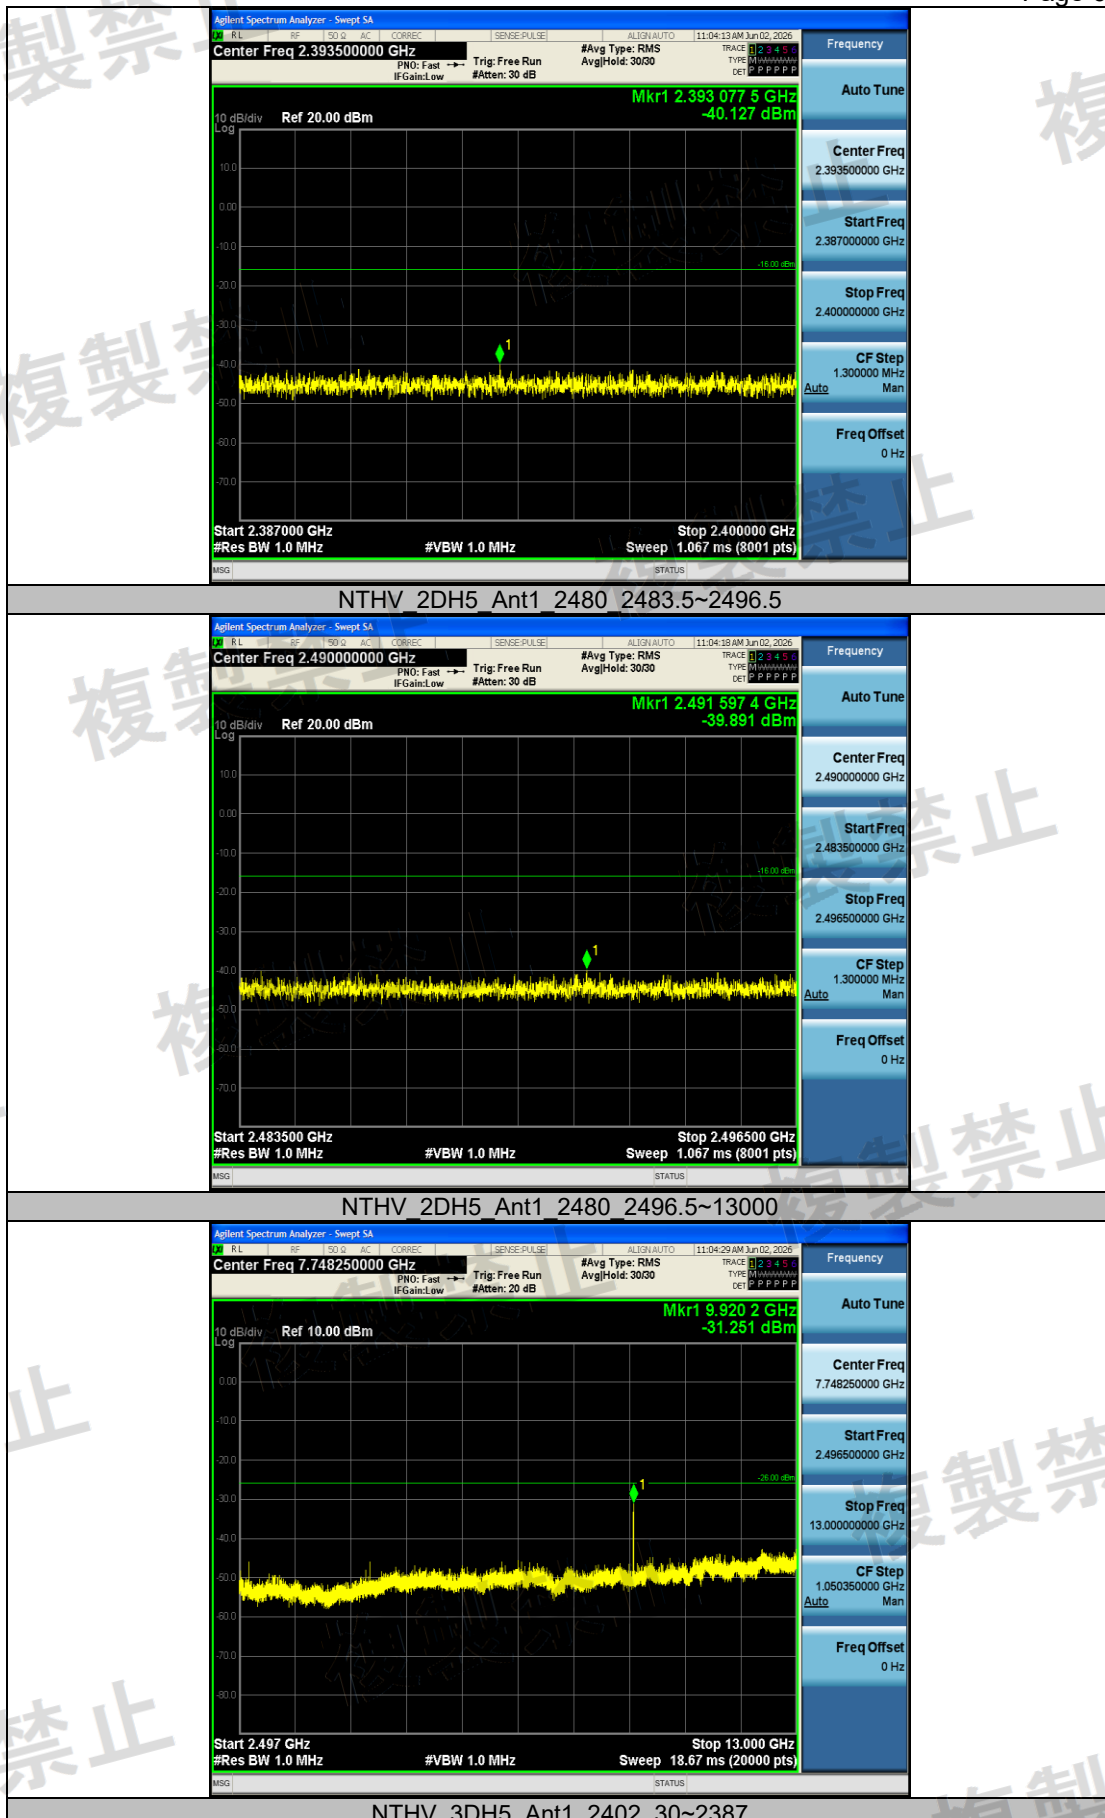


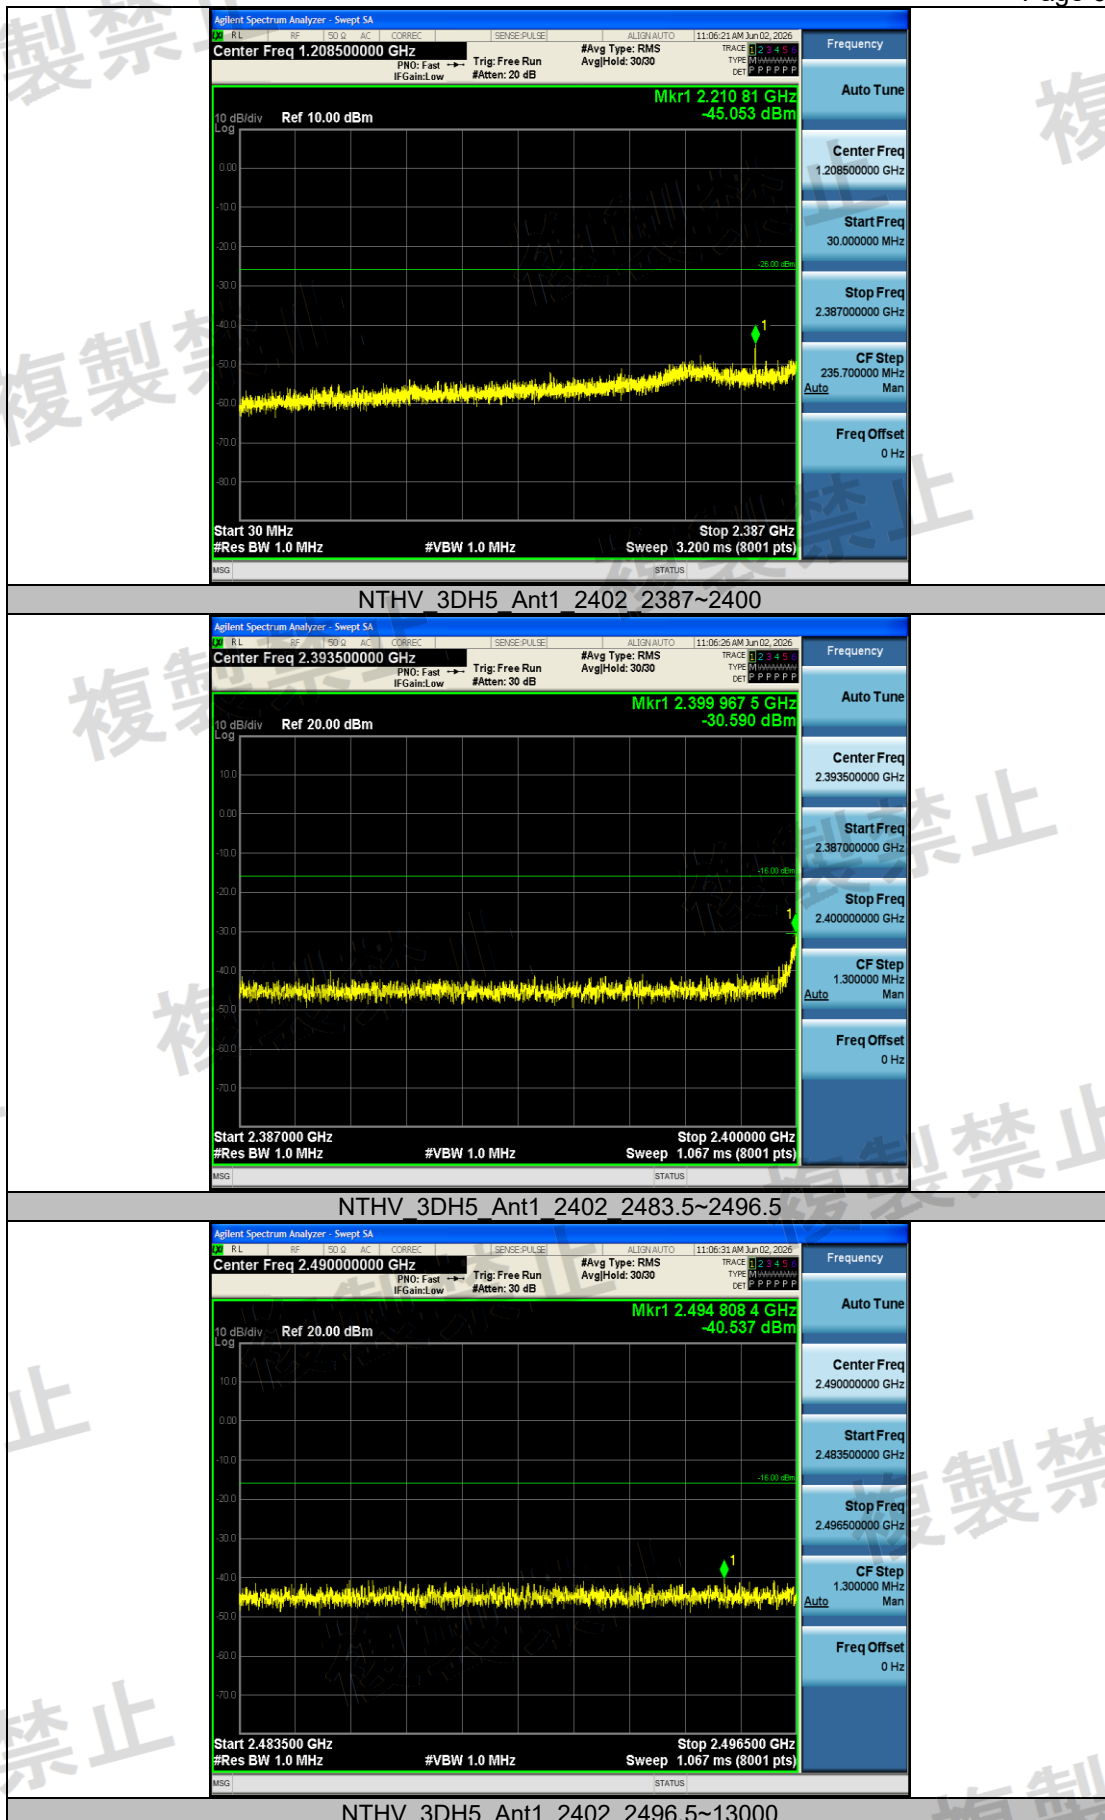

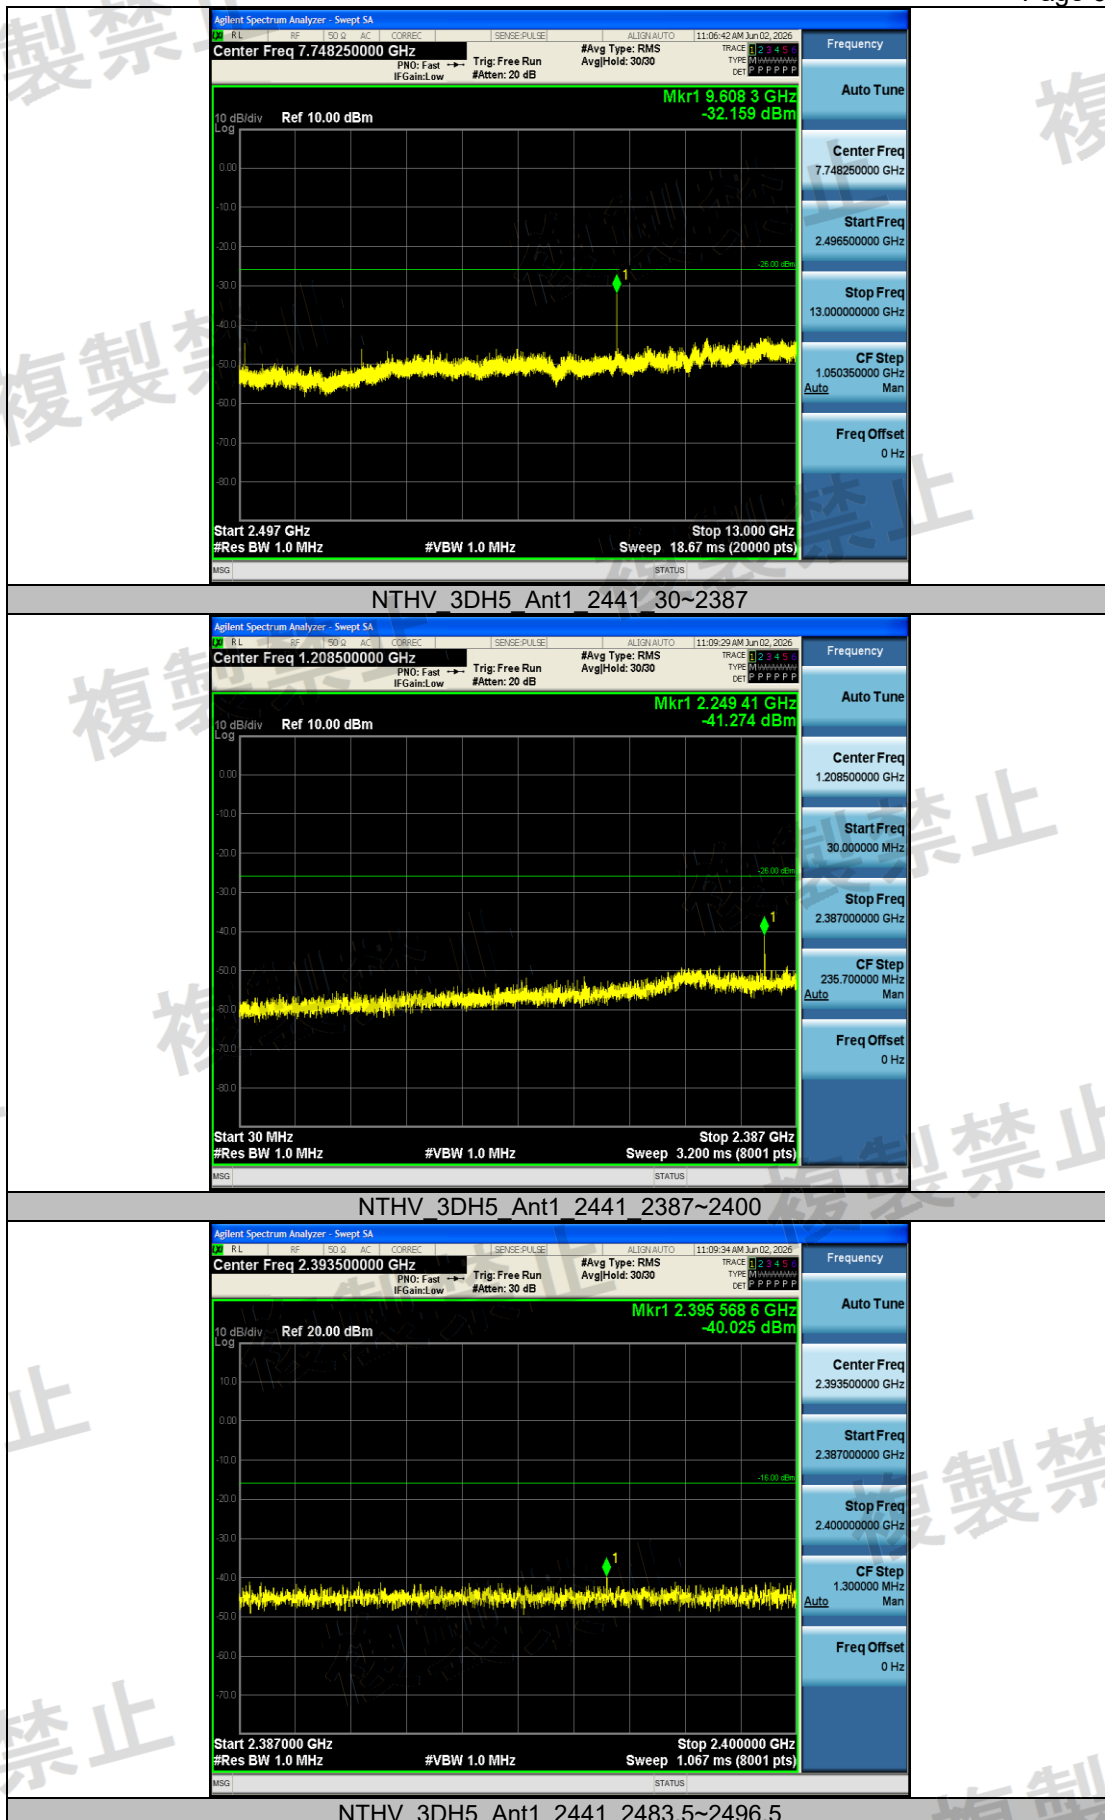


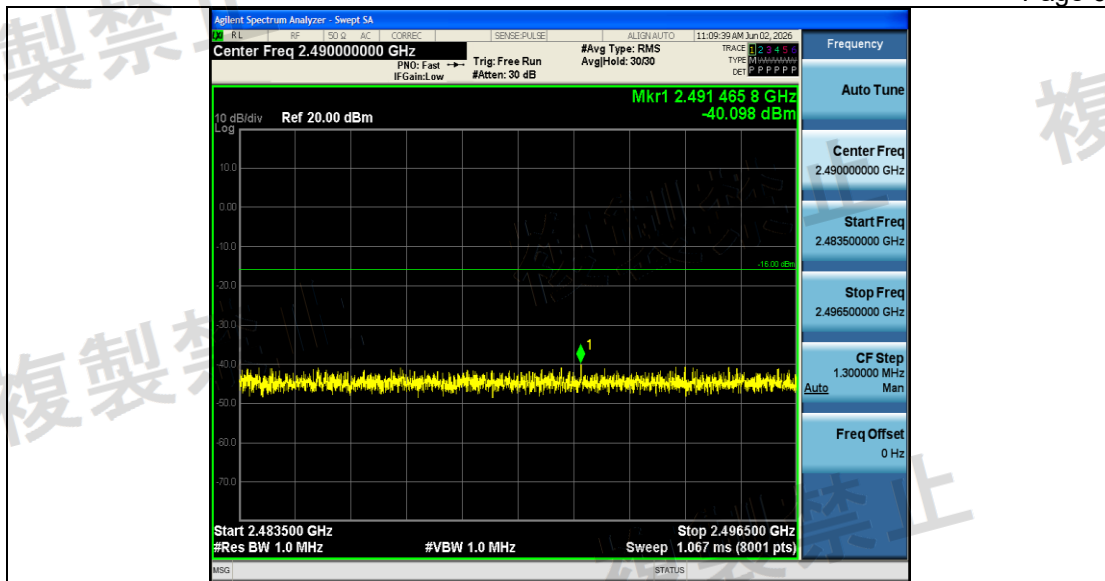

NTHV 3DH5 Ant1 2441 2496.5~13000

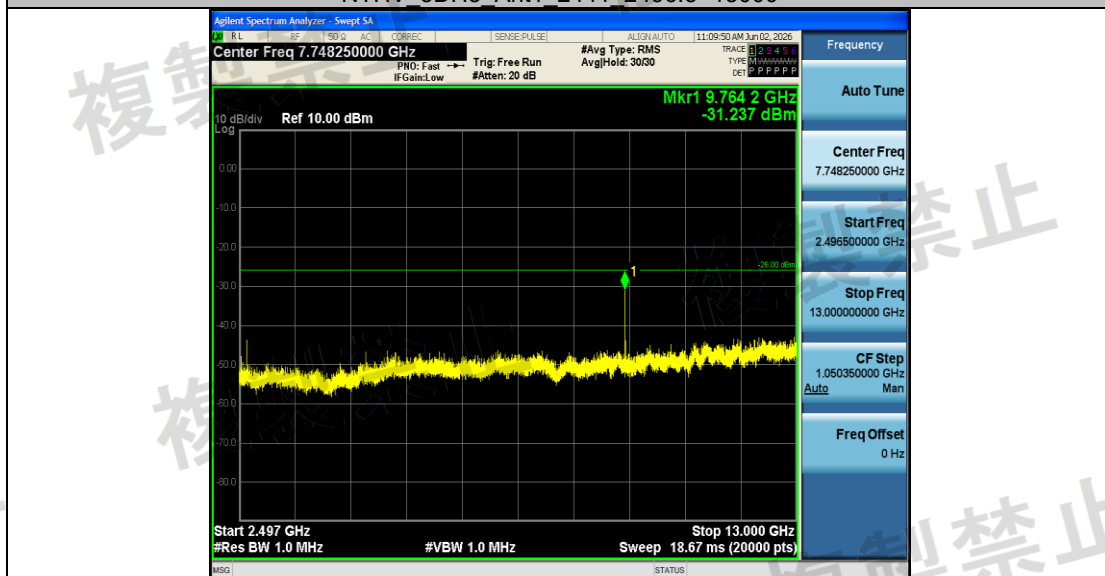


NTHV 3DH5 Ant1 2480 30~2387

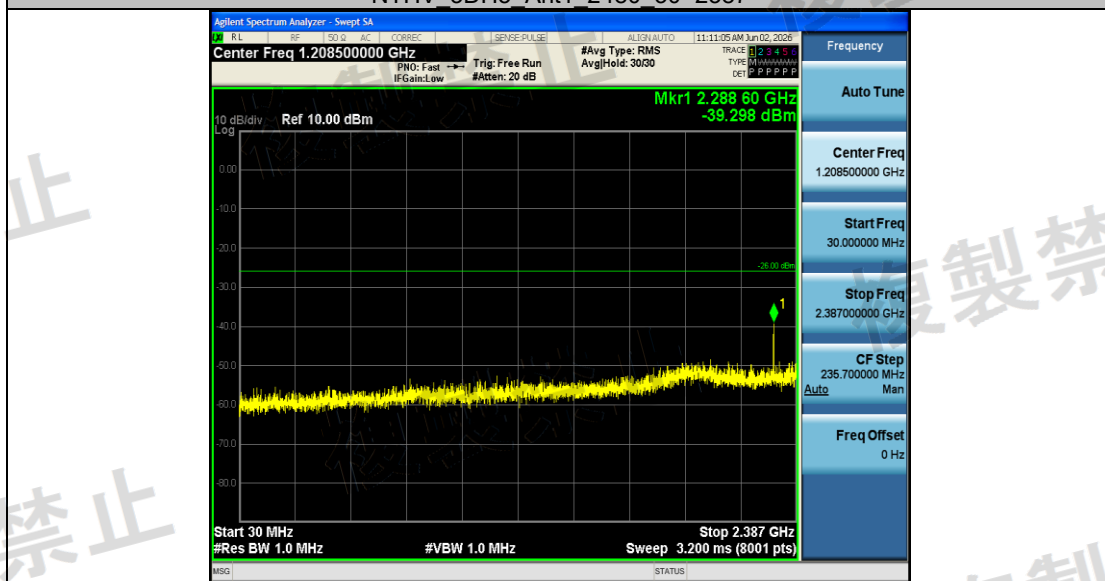

NTHV 3DH5 Ant1 2480 2387~2400




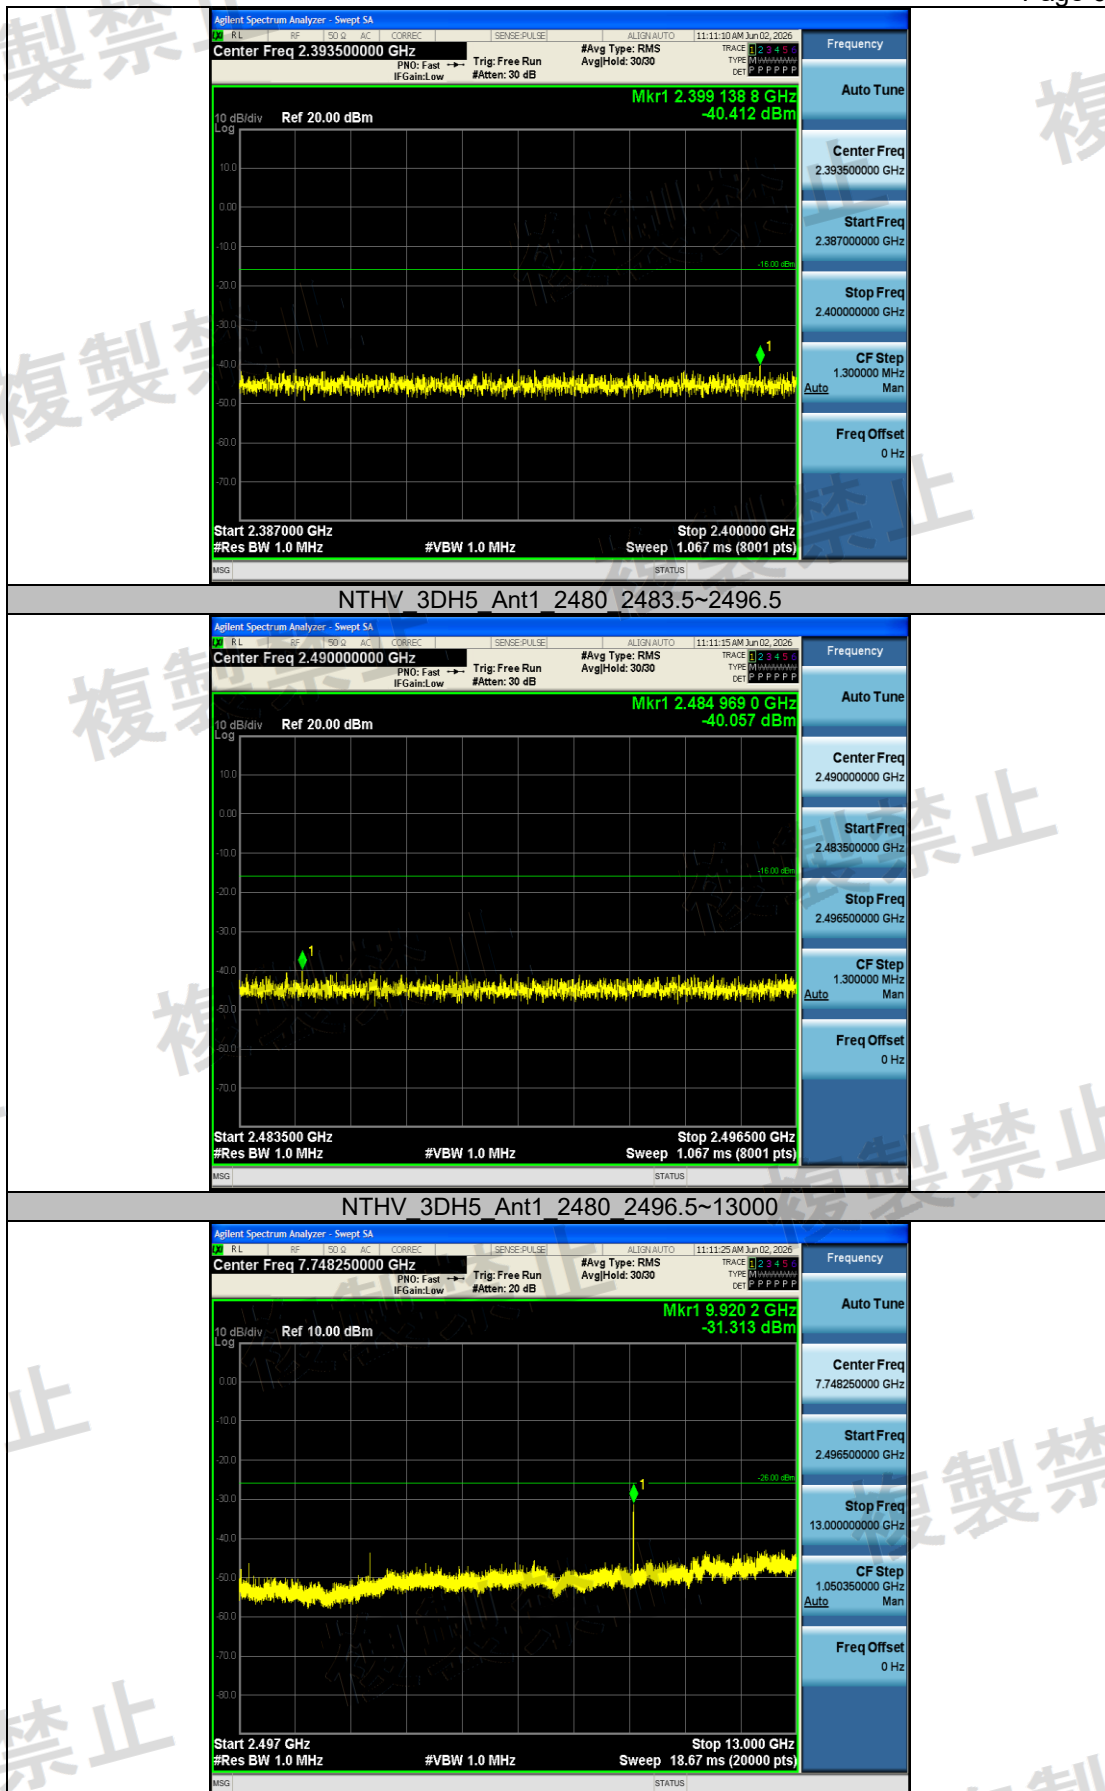



4.6. Limit of secondary radiated emissions

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

Frequency: 30MHz-13GHz

RBW:100KHz(30MHz-1GHz), 1MHz(1GHz-13GHz)

VBW:100KHz(30MHz-1GHz), 1MHz(1GHz-13GHz)

Sweep time:Auto

Dectector mode: Positive peak

Indication mode: max hold

LIMIT

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4 nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit

TEST RESULTS

Test Condition	Test Mode	Antenna	Freq (MHz)	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	DH5	Ant1	2402	30~1000	740.77	-72.22	≤-54	0.05998	≤4	PASS
				1000~13000	2579.28	-58.01	≤-47	1.58125	≤20	PASS
			2441	30~1000	836.68	-72.62	≤-54	0.05470	≤4	PASS
				1000~13000	12929.20	-62.70	≤-47	0.53703	≤20	PASS
			2480	30~1000	699.79	-72.97	≤-54	0.05047	≤4	PASS
				1000~13000	2419.07	-61.09	≤-47	0.77804	≤20	PASS
	2DH5	Ant1	2402	30~1000	853.53	-72.59	≤-54	0.05508	≤4	PASS
				1000~13000	12346.57	-62.90	≤-47	0.51286	≤20	PASS
			2441	30~1000	923.73	-72.40	≤-54	0.05754	≤4	PASS
				1000~13000	11301.92	-62.54	≤-47	0.55719	≤20	PASS
			2480	30~1000	734.71	-72.33	≤-54	0.05848	≤4	PASS
				1000~13000	12398.17	-62.59	≤-47	0.55081	≤20	PASS
	3DH5	Ant1	2402	30~1000	756.29	-72.84	≤-54	0.05200	≤4	PASS
				1000~13000	12419.17	-62.89	≤-47	0.51404	≤20	PASS
			2441	30~1000	795.09	-72.24	≤-54	0.05970	≤4	PASS





			2480	1000~1300 0	12988.00	-62.75	≤-47	0.5308 8	≤20	PASS
				30~1000	914.88	-72.61	≤-54	0.0548 3	≤4	PASS
				1000~1300 0	12950.20	-63.45	≤-47	0.4518 6	≤20	PASS
NTLV	DH5	Ant1	2402	30~1000	809.03	-72.29	≤-54	0.0590 2	≤4	PASS
				1000~1300 0	12434.77	-62.91	≤-47	0.5116 8	≤20	PASS
			2441	30~1000	780.17	-72.21	≤-54	0.0601 2	≤4	PASS
				1000~1300 0	11309.72	-62.23	≤-47	0.5984 1	≤20	PASS
			2480	30~1000	796.66	-72.59	≤-54	0.0550 8	≤4	PASS
				1000~1300 0	5782.24	-61.72	≤-47	0.6729 8	≤20	PASS
	2DH5	Ant1	2402	30~1000	792.66	-72.45	≤-54	0.0568 9	≤4	PASS
				1000~1300 0	12462.37	-62.33	≤-47	0.5847 9	≤20	PASS
			2441	30~1000	971.63	-72.74	≤-54	0.0532 1	≤4	PASS
				1000~1300 0	12406.57	-63.08	≤-47	0.4920 4	≤20	PASS
			2480	30~1000	892.82	-71.78	≤-54	0.0663 7	≤4	PASS
				1000~1300 0	5788.24	-60.80	≤-47	0.8317 6	≤20	PASS
	3DH5	Ant1	2402	30~1000	912.58	-72.83	≤-54	0.0521 2	≤4	PASS
				1000~1300 0	12367.57	-62.53	≤-47	0.5584 7	≤20	PASS
			2441	30~1000	800.91	-72.88	≤-54	0.0515 2	≤4	PASS
				1000~1300 0	12332.77	-62.78	≤-47	0.5272 3	≤20	PASS
			2480	30~1000	719.06	-72.12	≤-54	0.0613 8	≤4	PASS
				1000~1300 0	12338.77	-61.47	≤-47	0.7128 5	≤20	PASS
NTHV	DH5	Ant1	2402	30~1000	843.95	-72.46	≤-54	0.0567 5	≤4	PASS
				1000~1300 0	2549.28	-61.63	≤-47	0.6870 7	≤20	PASS
			2441	30~1000	861.17	-72.56	≤-54	0.0554 6	≤4	PASS
				1000~1300 0	12407.77	-62.55	≤-47	0.5559 0	≤20	PASS
			2480	30~1000	949.92	-72.00	≤-54	0.0631 0	≤4	PASS
				1000~1300 0	2539.68	-57.44	≤-47	1.8030 2	≤20	PASS
	2DH5	Ant1	2402	30~1000	931.74	-72.55	≤-54	0.0555 9	≤4	PASS
				1000~1300 0	5790.64	-60.97	≤-47	0.7998 3	≤20	PASS
			2441	30~1000	815.94	-72.93	≤-54	0.0509 3	≤4	PASS
				1000~1300 0	12408.37	-62.84	≤-47	0.5200 0	≤20	PASS
			2480	30~1000	887.12	-72.29	≤-54	0.0590 2	≤4	PASS
				1000~1300 0	5790.64	-61.39	≤-47	0.7261 1	≤20	PASS





	3DH5	Ant1	2402	30~1000	774.23	-72.33	≤-54	0.0584 8	≤4	PASS
				1000~1300 0	12373. 57	-63.37	≤-47	0.4602 6	≤20	PASS
			2441	30~1000	723.43	-72.55	≤-54	0.0555 9	≤4	PASS
				1000~1300 0	12711. 99	-62.58	≤-47	0.5520 8	≤20	PASS
			2480	30~1000	909.79	-73.06	≤-54	0.0494 3	≤4	PASS
				1000~1300 0	12678. 38	-63.24	≤-47	0.4742 4	≤20	PASS

Note: 1. The product was tested at 25℃ and 55% humidity condition;

2. All condition has been tested, list the worst case in this item

Test plot as follows:



