

FCC Part 15B Test Report

Digital Matter

FINAL SUMMARY REPORT

Report Type: 15B
Model: Oyster3 4G Bluetooth
Software Version: N/A
Hardware Version: V3.0

SCOPE OF WORK

Title 47 CFR Part 15 Subpart B
ICES-003 Issue 7

REPORT NUMBER

105447912LEX-003.1

ISSUE DATE

23-June-2023

REVISE DATE

11-December-2023





FCC Part 15B Test Report

TABLE OF CONTENTS

Table of Contents	2
1 Introduction	3
1.1 Report Versions	3
1.2 Statement of Compliance and Laboratory Conformance Declaration	4
1.3 Statement of Liability	5
2 General Information	6
3 Name and address of the Recognized Test Organization (RTO)	6
4 Description of Test Samples	7
4.1 User Equipment (UE)/Project Information	7
5 Test Results Summary	9
6 References	9
7 Environment	9
7.1 Operational Temperature and Power Range of the device	9
8 Measurement Systems	10
8.1 Method	10
8.2 Sample Calculation	11
8.3 Field Strength to Power Calculation	12
8.4 Platforms	13
8.5 Software Utilized	13
8.6 Setup Photographs	15
9 Test Results Executive Summary	17
9.1 Executive Summary	17
9.2 Test Results	18
9.3 Unintentional Radiated Emissions, 30MHz – 1GHz (IEEE/ANSI C63.4)	19
9.4 Unintentional Radiated Emissions, 1GHz – 18GHz (IEEE/ANSI C63.4)	20
10 Measurement Uncertainty	22
11 Revision History	23



FCC Part 15B Test Report

1 INTRODUCTION

The purpose of this document is to record the test results for the Digital Matter Oyster3 4G Bluetooth. This test report shall not be reproduced except in full, without written approval of the test lab. The terminal device was tested to the following specifications:

IEEE/ANSI C63.4-2014

The measurement methods and inherent results detailed in this evaluation are within the normative limits defined within the specific standard of each section, where applicable. Furthermore, detailed uncertainty budgets are maintained on file and are available upon request.



1.1 REPORT VERSIONS

REPORT NUMBER	DESCRIPTION	VERSION
105447912LEX-003	Initial Release of Report	1.0
105447912LEX-003.1	Added ICES-003 references	1.1



1.2 STATEMENT OF COMPLIANCE AND LABORATORY CONFORMANCE DECLARATION

In this document you will find a description of the terminal device, a description of the test equipment and test execution software used to complete the testing, and an executive summary of the test results. Intertek is accredited as an ISO 17025-2017 laboratory for all scopes tested in this report. Intertek's accreditation certificate number is 1926.01.



FCC Part 15B Test Report

1.3 STATEMENT OF LIABILITY

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.




FCC Part 15B Test Report

2 GENERAL INFORMATION

GENERAL INFORMATION - PROJECT ID 6468					
Test Start date:	06/06/2023	Test End Date:	06/06/2023	RTO Test Report #:	105447912LEX-003.1

3 NAME AND ADDRESS OF THE RECOGNIZED TEST ORGANIZATION (RTO)

GCF RTO FACILITY INFORMATION			
RTO Name:	Intertek		
RTO Contact Phone #:	859-226-1000		
RTO Authorization #:	20		
RTO Address:	731 Enterprise Dr. Lexington, KY 40510 Kentucky, 40510, USA		
Evaluation by:	Jeremiah Andrade, EMC Technician	Signature:	
Prepared by:	Miranda Steele, Project Coordinator	Signature:	
Reviewed by:	Brian Lackey, EMC Team Leader	Signature:	



4 DESCRIPTION OF TEST SAMPLES

4.1 USER EQUIPMENT (UE)/PROJECT INFORMATION

PROJECT INFORMATION / User Equipment (UE)	
UE Manufacturer:	Digital Matter
UE Model #:	Oyster3 4G Bluetooth
Software Version:	N/A
Hardware Version:	V3.0
Embedded Module:	Nordic Semiconductor nRF9160-SICA-B1
Embedded Module Hardware Version:	Hardware revision B1A
Embedded Module Software Version:	1.3.1
Sample Identifier: (IMEI or product's unique identifier)	Serial Number: 723736 IMEI: 351901935180178
Sample Condition/Description:	Samples arrived in good condition as first run production samples
VENDOR INFORMATION	
Address:	239 Grant Street SE, Suite 101 Atlanta, GA 30312 USA
Email:	leon@digitalmatter.com
REGULATORY APPROVALS	
FCC ID:	2ANPO00NRF9160
These test results relate only to the specific items (UEs) tested (listed above).	
Engineering Final Summary:	Next-generation of our best-selling Oyster series – Ultra-rugged battery-powered GPS asset tracking device featuring 10+ years battery life.



FCC Part 15B Test Report

Photo of UE (front):



Photo of UE (back):





FCC Part 15B Test Report

5 TEST RESULTS SUMMARY

TEST RESULTS SUMMARY	
Total Tests Required (A, B, or E):	2
Tests Not Applicable:	0
Tests Passed:	2
Tests Failed:	0

6 REFERENCES

The following references are applicable to this document:

SPECIFICATION NUMBER	DESCRIPTION
IEEE/ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

7 ENVIRONMENT

7.1 OPERATIONAL TEMPERATURE AND POWER RANGE OF THE DEVICE

The operating voltage range for the device is low 3.0 V to high 10V. The nominal operating voltage is 4.5V. The operating temperature range for the device is low -20°C to high 60°C. The nominal operating temperature is 25°C.



8 MEASUREMENT SYSTEMS

8.1 METHOD

Tests are performed in accordance with ANSI C63.4:2014.

TEST SITE: 10m ALSE
Site Designation: 10m Chamber



FCC Part 15B Test Report

8.2 SAMPLE CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
AF = 7.4 dB/m
CF = 1.6 dB
AG = 29.0 dB
FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$UF = 10^{(NF / 20)}$ where UF = Net Reading in μ V
NF = Net Reading in dB μ V

Example:

$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$
 $UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$



FCC Part 15B Test Report

8.3 FIELD STRENGTH TO POWER CALCULATION

As allowable by ANSI C63.26: 2015 section 5.2.7, the output power of unwanted emissions can be calculated from a field strength measurement. The transmitter measurements that follow in this report have applied the following calculation to the -13dBm limit to arrive an equivalent field strength limit at 3 meters as follows:

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20\log(D) + 104.8$; where D is the measurement distance (in the far field region) in m.

Example:

Limit (dBuV/m) = $-13 - 20\log(3) + 104.8 = 82.25\text{dBuV/m}$



FCC Part 15B Test Report

8.4 PLATFORMS

8.4.1 EMC - RADIATED EMISSIONS (10M) (VER. 1)

Description	Asset Number	Manufacturer	Model	Cal. Date	Cal. Due
System Controller	3957	Sunol Sciences	SC110V	Verify at Time of Use	Verify at Time of Use
System Controller	4096	ETS Lindgren	2090	Verify at Time of Use	Verify at Time of Use
EMI Test Receiver	8285	Rohde & Schwarz	ESW44	12/23/2022	12/23/2023
Horn Antenna (1-18GHz)	3780	ETS	3117	8/19/2022	8/19/2023
1-18GHz Signal Path with Preamplifier	3074, 3918, 2588, 2593, 8188, 8185			1/12/2023	1/12/2024
Bilog Antenna (30MHz-1GHz)	7085	SunAR	JB6	3/7/2023	3/7/2024
30M-1G 3m Signal Path without Preamplifier	3339, 2592, 8188, 8185			1/12/2023	1/12/2024



FCC Part 15B Test Report

8.5 SOFTWARE UTILIZED


Name	Manufacturer	Version
EMC32	Rohde & Schwarz	Version 10.60.20



FCC Part 15B Test Report

8.6 SETUP PHOTOGRAPHS


8.6.1 UNINTENTIONAL RADIATED EMISSIONS, 30MHZ – 1GHZ (IEEE/ANSI C63.4)

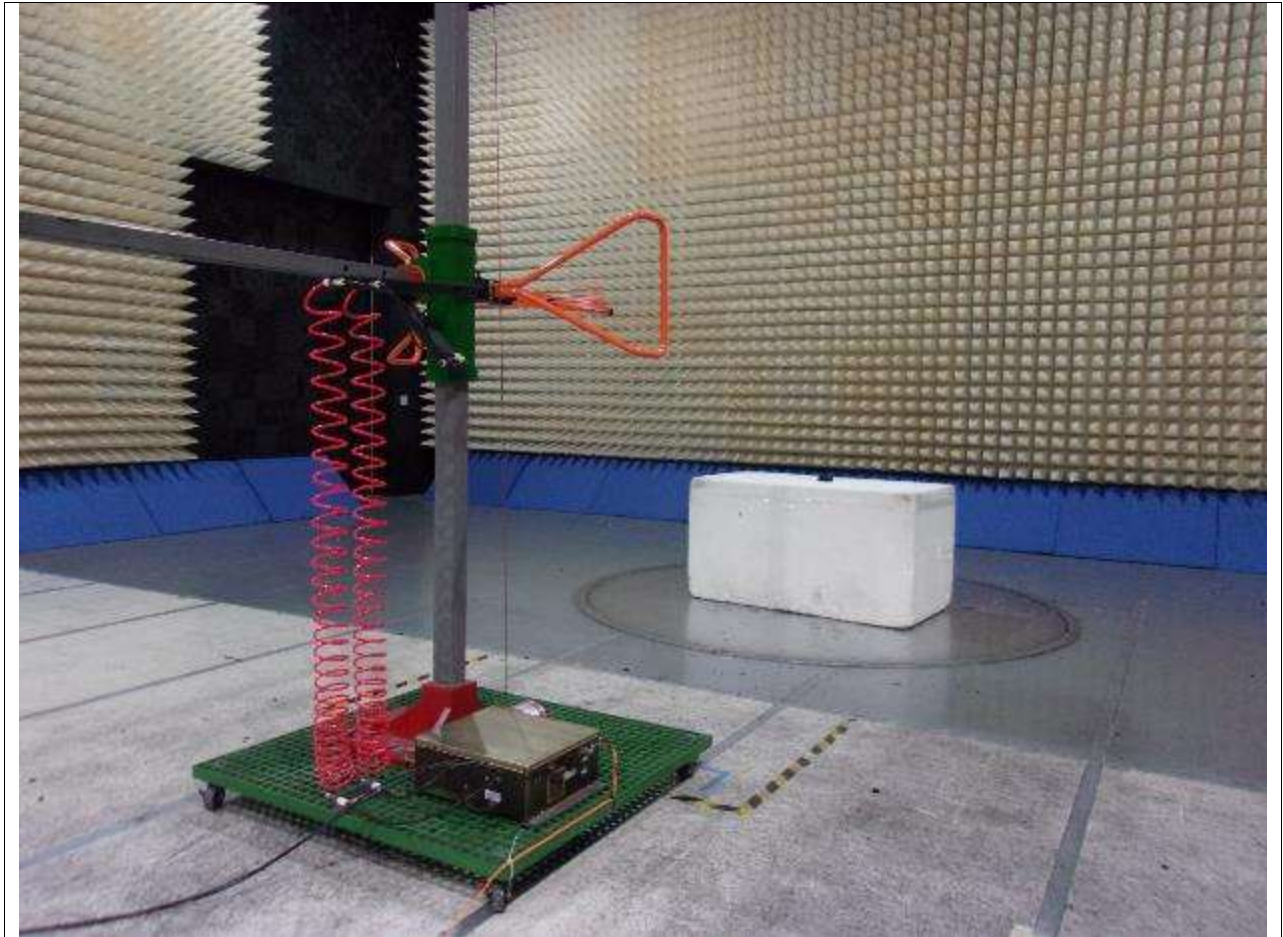



FCC Part 15B Test Report

8.6.2 UNINTENTIONAL RADIATED EMISSIONS, 1GHZ – 18GHZ (IEEE/ANSI C63.4)

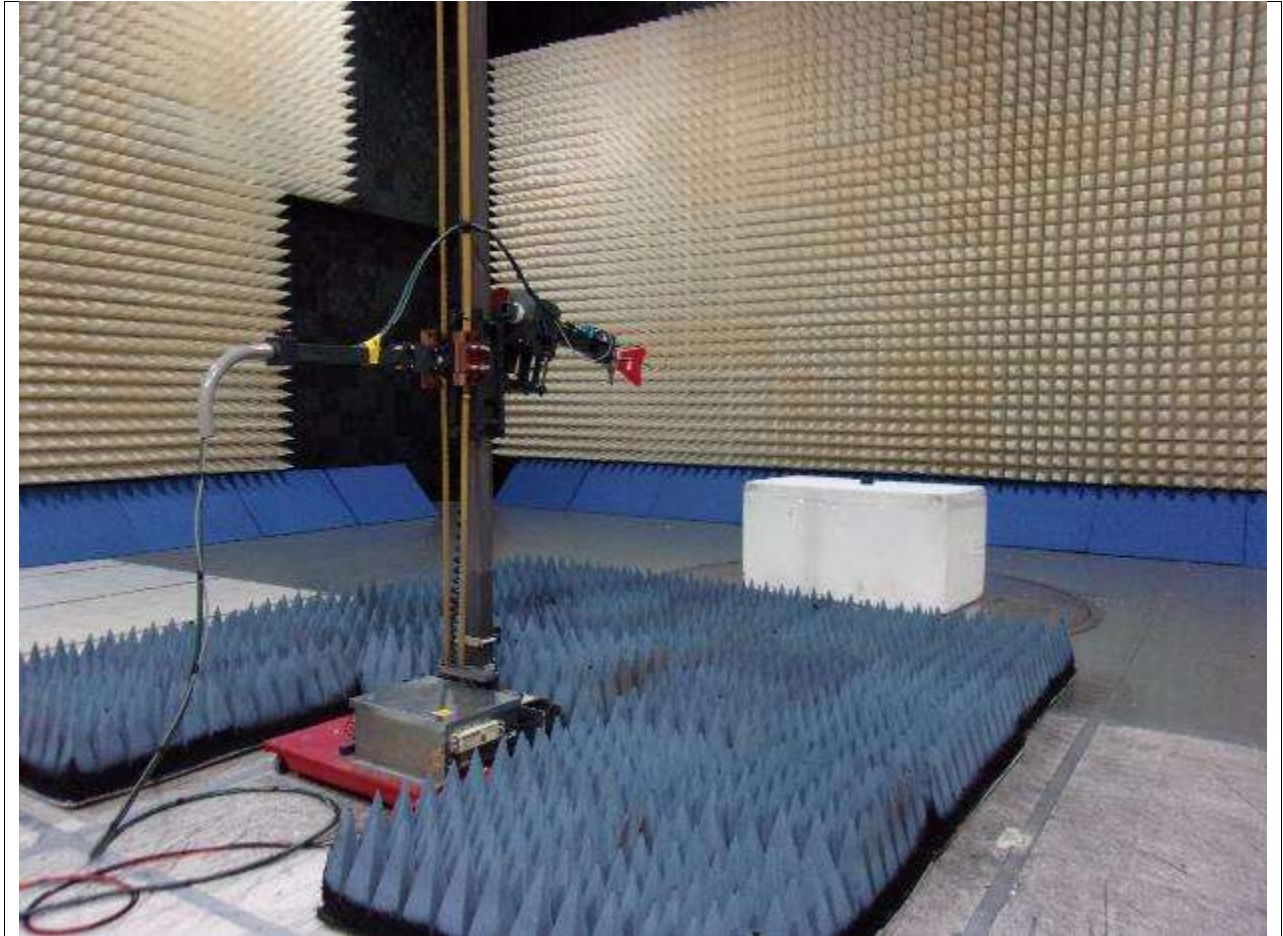



FCC Part 15B Test Report

9 TEST RESULTS EXECUTIVE SUMMARY

9.1 EXECUTIVE SUMMARY

TEST PLAN	TOTAL TEST CASES	PASSED	FAILED	N/A	FINISHED RATE	COMPLIANT RATE
FCC Title 47 CFR Part 15 Subpart B ICES-003 Issue 7	2	2	0	0	100.00%	100.00%



FCC Part 15B Test Report

9.2 TEST RESULTS


9.2.1 FCC TITLE 47 CFR PART 15 SUBPART B

TEST NAME	TEST DESCRIPTION	DEVICE	RESULT	TEST SYSTEM	COMMENTS
Class A Digital Devices	Test				
Radiated emissions, 30 MHz - 1 GHz, Class A	ANSI C63.4-2014 § 8.2.3, FCC Part 15.109(b) limits	351901935174213, DHW: V3.0, DSW: N/A	Passed	EMC – Radiated Emissions (10m) (Ver. 1)	
Radiated emissions, 1 GHz - 18 GHz, Class A	ANSI C63.4-2014 § 8.2.4, FCC Part 15.109(b) limits	351901935174213, DHW: V3.0, DSW: N/A	Passed	EMC – Radiated Emissions (10m) (Ver. 1)	



FCC Part 15B Test Report

9.3 UNINTENTIONAL RADIATED EMISSIONS, 30MHZ – 1GHZ (IEEE/ANSI C63.4)

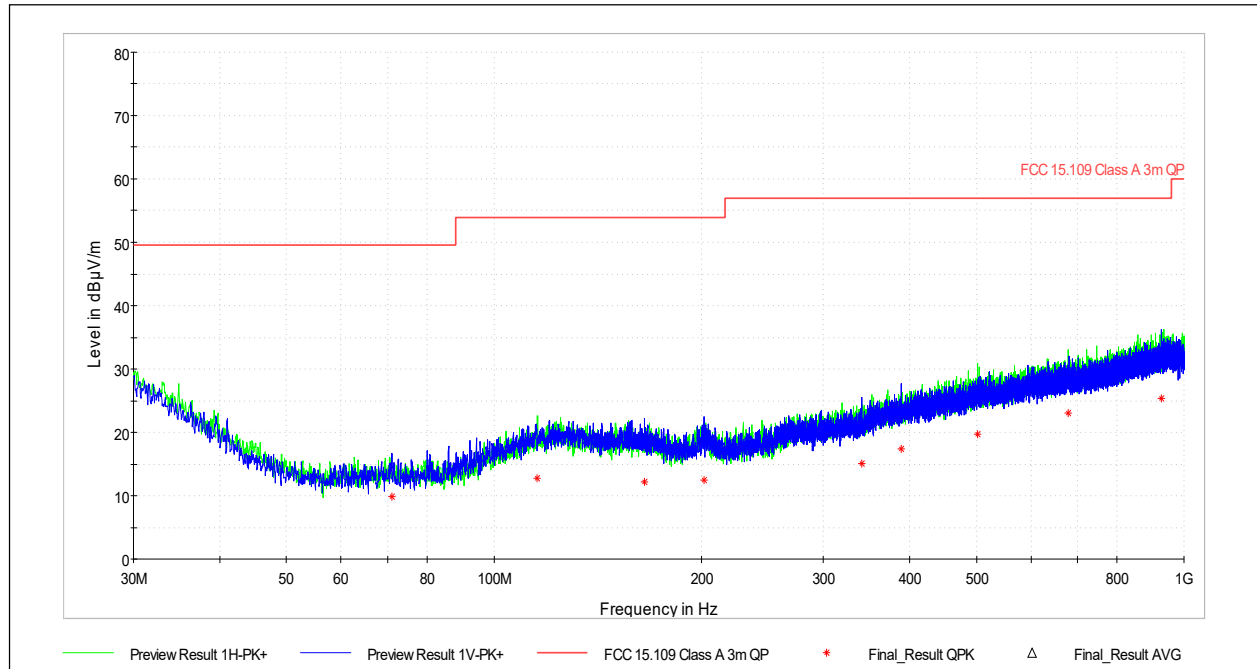

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
71.063	9.80	49.54	39.74	190.0	V	139.0	14.5
115.522	12.81	53.98	41.17	288.0	H	0.0	20.3
165.099	12.22	53.98	41.76	383.0	V	0.0	20.2
201.528	12.53	53.98	41.45	249.0	V	334.0	20.3
341.208	15.10	56.90	41.81	276.0	V	346.0	22.6
389.008	17.32	56.90	39.58	234.0	V	222.0	23.8
501.905	19.71	56.90	37.19	95.0	H	221.0	26.5
679.954	23.11	56.90	33.79	212.0	H	178.0	29.7
927.466	25.37	56.90	31.53	247.0	V	121.0	32.1

Test Personnel: Jeremiah Andrade
Supervising/Reviewing Engineer: Brian Lackey
(Where Applicable) FCC Part 15B
Product Standard: ICES-003 Issue 7
Input Voltage: Battery
Pretest Verification w / Ambient Signals or BB Source: Yes


Test Date: 06/06/2023
Limit Applied: Class A
Ambient Temperature: 23.2C
Relative Humidity: 54.5%
Atmospheric Pressure: 982.0mbar

Deviations, Additions, or Exclusions: None



FCC Part 15B Test Report

9.4 UNINTENTIONAL RADIATED EMISSIONS, 1GHZ – 18GHZ (IEEE/ANSI C63.4)

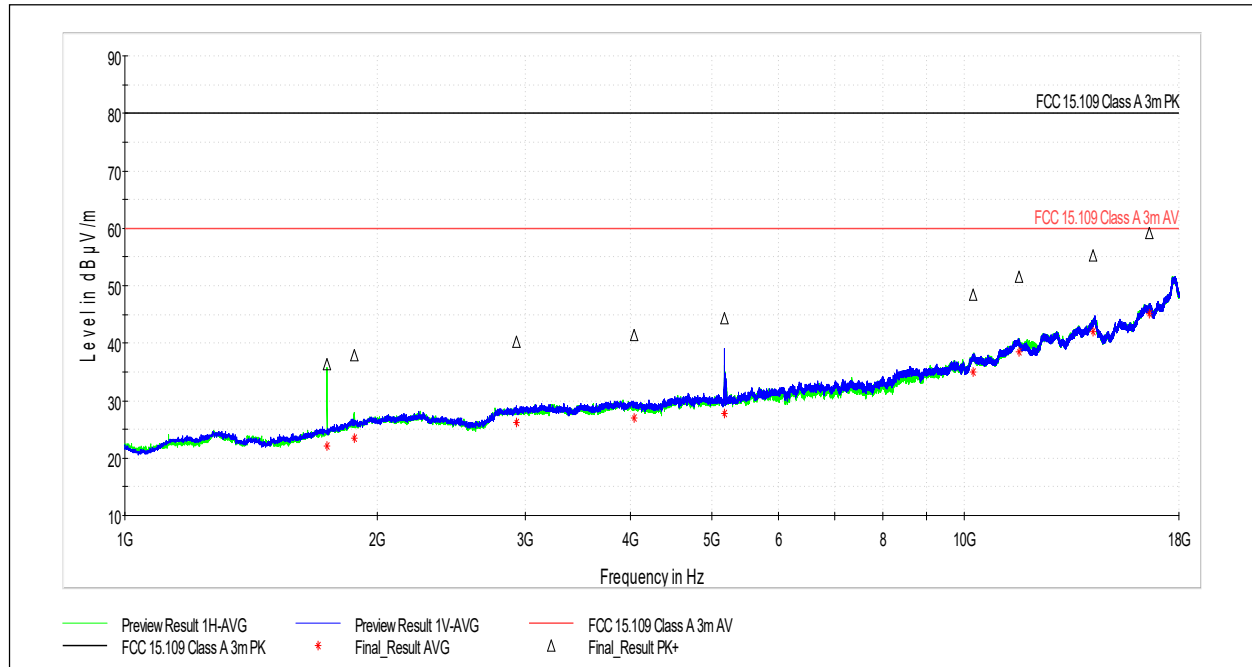

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1741.500	36.36	80.00	43.64	302.0	H	342.0	1.9
1874.500	37.82	80.00	42.18	236.0	H	0.0	3.3
2923.500	40.18	80.00	39.82	100.0	V	309.0	6.7
4038.500	41.37	80.00	38.63	100.0	V	111.0	8.9
5175.500	44.33	80.00	35.67	100.0	V	44.0	10.7
10238.500	48.53	80.00	31.47	179.0	H	124.0	18.8
11603.000	51.64	80.00	28.36	257.0	H	216.0	20.9
14226.000	55.35	80.00	24.65	100.0	H	68.0	23.6
16609.500	59.10	80.00	20.90	142.0	H	237.0	28.5



FCC Part 15B Test Report

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1741.500	22.02	60.00	37.98	302.0	H	342.0	1.9
1874.500	23.53	60.00	36.47	236.0	H	0.0	3.3
2923.500	26.23	60.00	33.77	100.0	V	309.0	6.7
4038.500	27.04	60.00	32.96	100.0	V	111.0	8.9
5175.500	27.83	60.00	32.17	100.0	V	44.0	10.7
10238.500	35.07	60.00	24.93	179.0	H	124.0	18.8
11603.000	38.47	60.00	21.53	257.0	H	216.0	20.9
14226.000	42.00	60.00	18.00	100.0	H	68.0	23.6
16609.500	45.13	60.00	14.87	142.0	H	237.0	28.5

Test Personnel: Jeremiah Andrade
Supervising/Reviewing Engineer:
(Where Applicable) Brian Lackey
FCC Part 15B
Product Standard: ICES-003 Issue 7
Input Voltage: Battery
Pretest Verification w / Ambient
Signals or BB Source: Yes

Test Date: 06/06/2023
Limit Applied: Class A
Ambient Temperature: 23.2C
Relative Humidity: 54.5%
Atmospheric Pressure: 982.0mbar

Deviations, Additions, or Exclusions: None



FCC Part 15B Test Report

10 MEASUREMENT UNCERTAINTY

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of $k = 2$, providing a confidence level of respectively 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement Uncertainty Table

Measurement	Frequency Range	Expanded Uncertainty (k=2)	Ucisp
Power Line Conducted Emissions	150 kHz - 30 MHz	3.1dB	3.4dB
Radiated Emissions, 10m	30-1000 MHz	3.9dB	6.3 dB
Radiated Emissions, 3m	30-1000 MHz	4.0dB	6.3 dB
Radiated Emissions, 3m	1-6 GHz	4.7dB	5.2 dB
Radiated Emissions, 3m	6-15 GHz	4.7dB	5.5 dB
Radiated Emissions, 3m	15-18 GHz	4.7dB	5.5 dB
Radiated Emissions, 3m	18-40 GHz	4.7dB	5.5 dB



FCC Part 15B Test Report

11 REVISION HISTORY

Revision Level	Date	Report Number	Evaluated By	Reviewed By	Notes
0	06/22/2023	105447912LEX-003	Jeremiah Andrade, EMC Technician	Brian Lackey, EMC Team Leader	Initial Release of Report
1	12/11/2023	105447912LEX-003.1	Jeremiah Andrade, EMC Technician	Brian Lackey, EMC Team Leader	Added ICES-003 references

FCC Part 15B Test Report

End of Test Report