


Annex D. Radiated Emission Measurement (5 GHz)

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

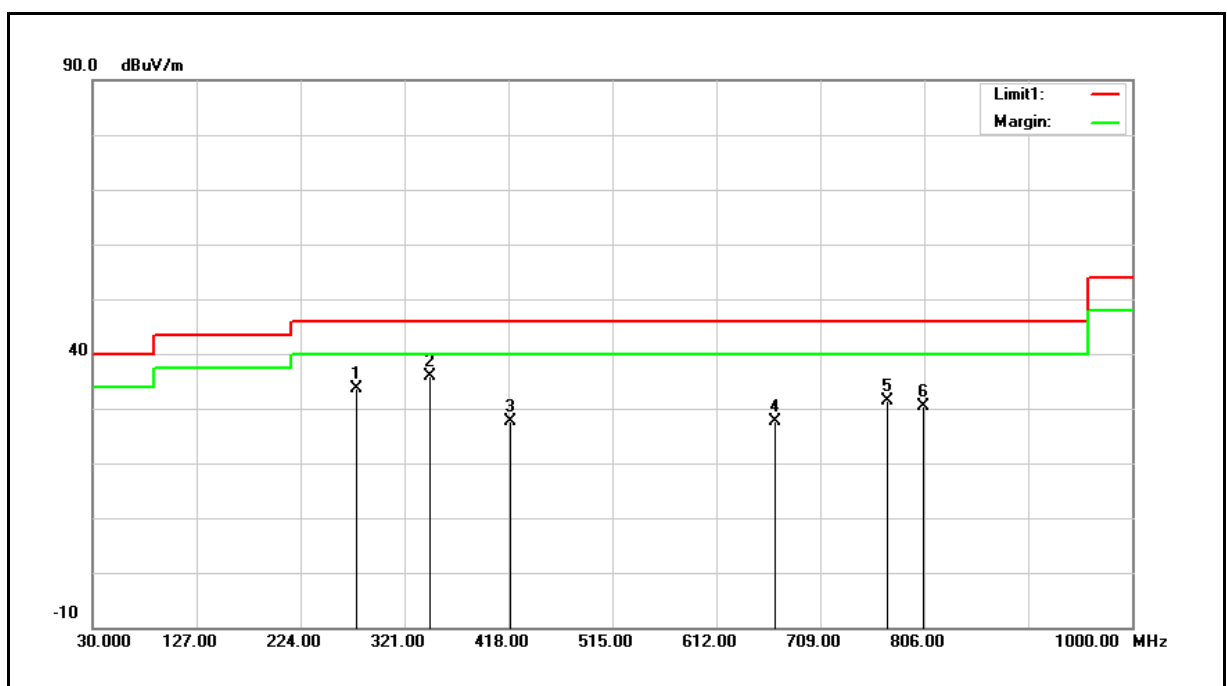

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	276.3800	40.68	-7.17	33.51	46.00	-12.49	QP
2	345.2500	41.49	-5.70	35.79	46.00	-10.21	QP
3	419.9400	32.13	-4.44	27.69	46.00	-18.31	QP
4	666.3200	28.20	-0.48	27.72	46.00	-18.28	QP
5	772.0500	30.20	1.19	31.39	46.00	-14.61	QP
6	805.0300	28.68	1.68	30.36	46.00	-15.64	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 33.51 = -7.17 + 40.68

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5825 MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

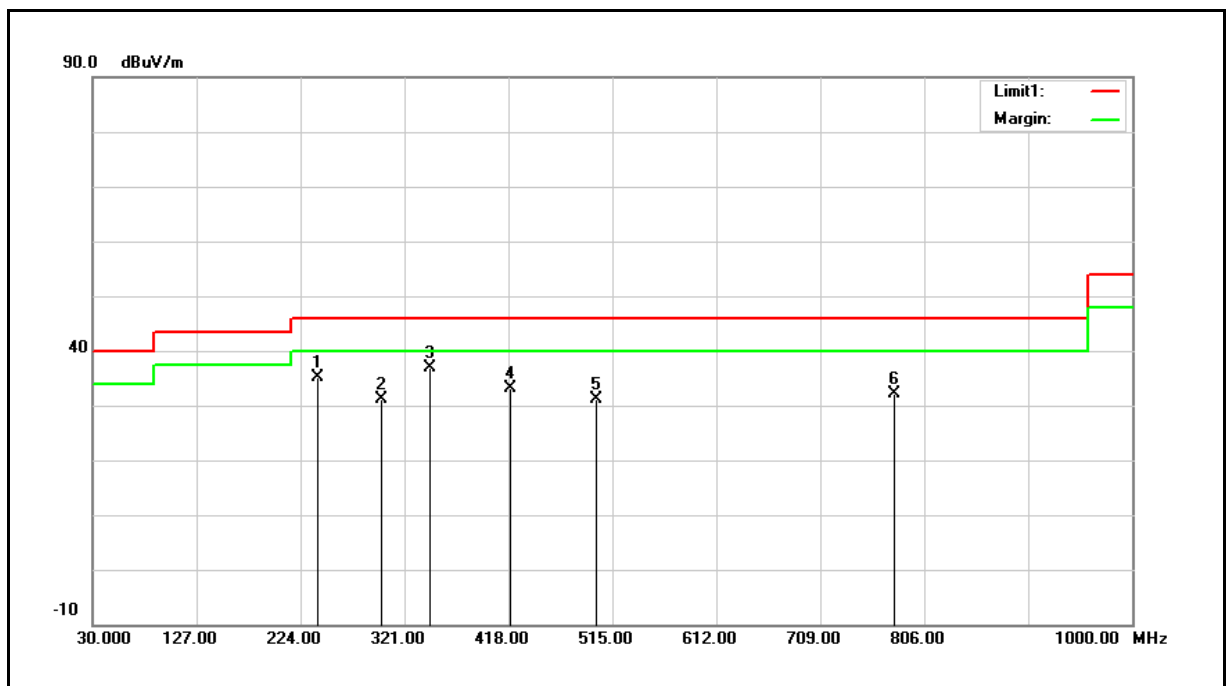

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	240.4900	43.56	-8.48	35.08	46.00	-10.92	QP
2	299.6600	37.69	-6.53	31.16	46.00	-14.84	QP
3	345.2500	42.69	-5.70	36.99	46.00	-9.01	QP
4	419.9400	37.64	-4.44	33.20	46.00	-12.80	QP
5	499.4800	34.68	-3.62	31.06	46.00	-14.94	QP
6	777.8700	30.81	1.27	32.08	46.00	-13.92	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $35.08 = -8.48 + 43.56$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

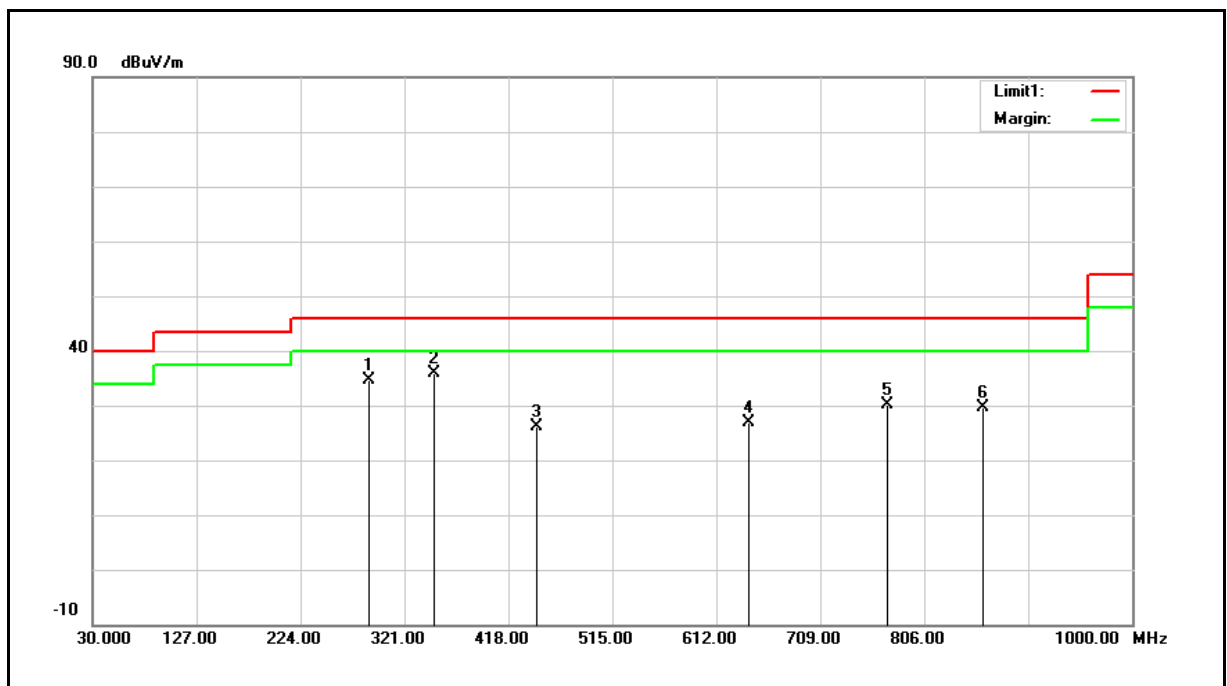


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	288.0200	41.55	-6.81	34.74	46.00	-11.26	QP
2	348.1600	41.50	-5.64	35.86	46.00	-10.14	QP
3	444.1900	30.13	-4.00	26.13	46.00	-19.87	QP
4	642.0700	27.76	-0.81	26.95	46.00	-19.05	QP
5	771.0800	28.84	1.17	30.01	46.00	-15.99	QP
6	861.2900	27.30	2.41	29.71	46.00	-16.29	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

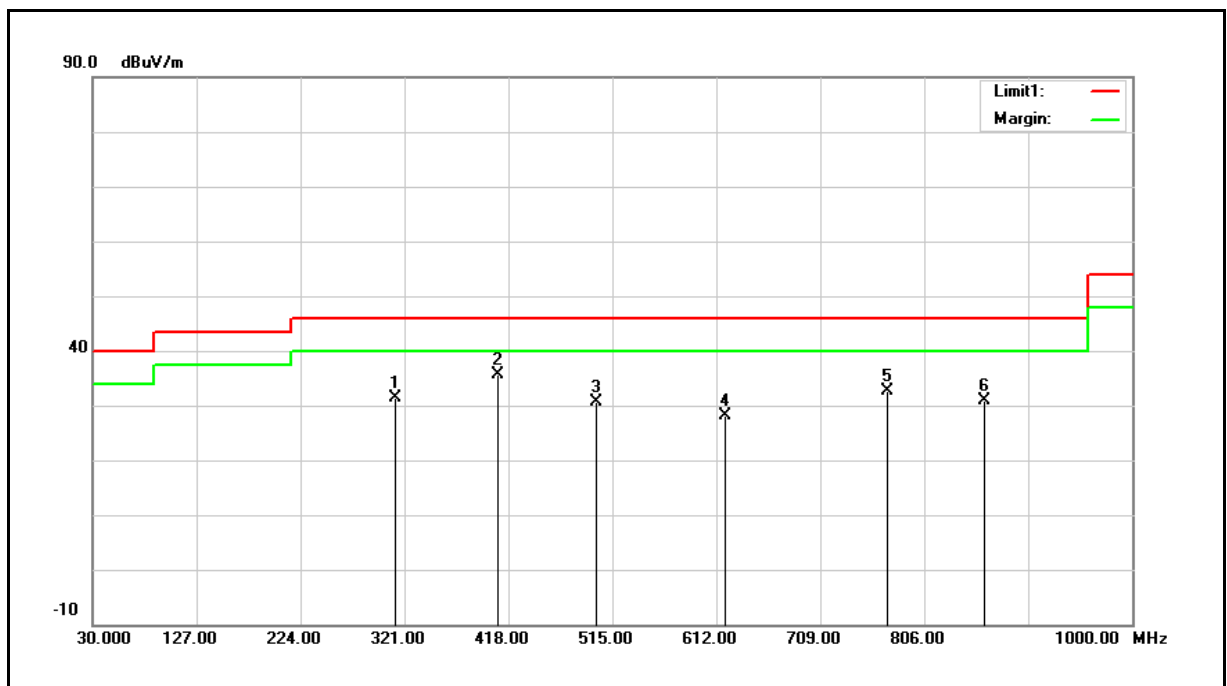

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	312.2700	37.69	-6.31	31.38	46.00	-14.62	QP
2	408.3000	40.32	-4.65	35.67	46.00	-10.33	QP
3	500.4500	34.14	-3.61	30.53	46.00	-15.47	QP
4	619.7600	29.17	-1.04	28.13	46.00	-17.87	QP
5	772.0500	31.50	1.19	32.69	46.00	-13.31	QP
6	862.2600	28.37	2.44	30.81	46.00	-15.19	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

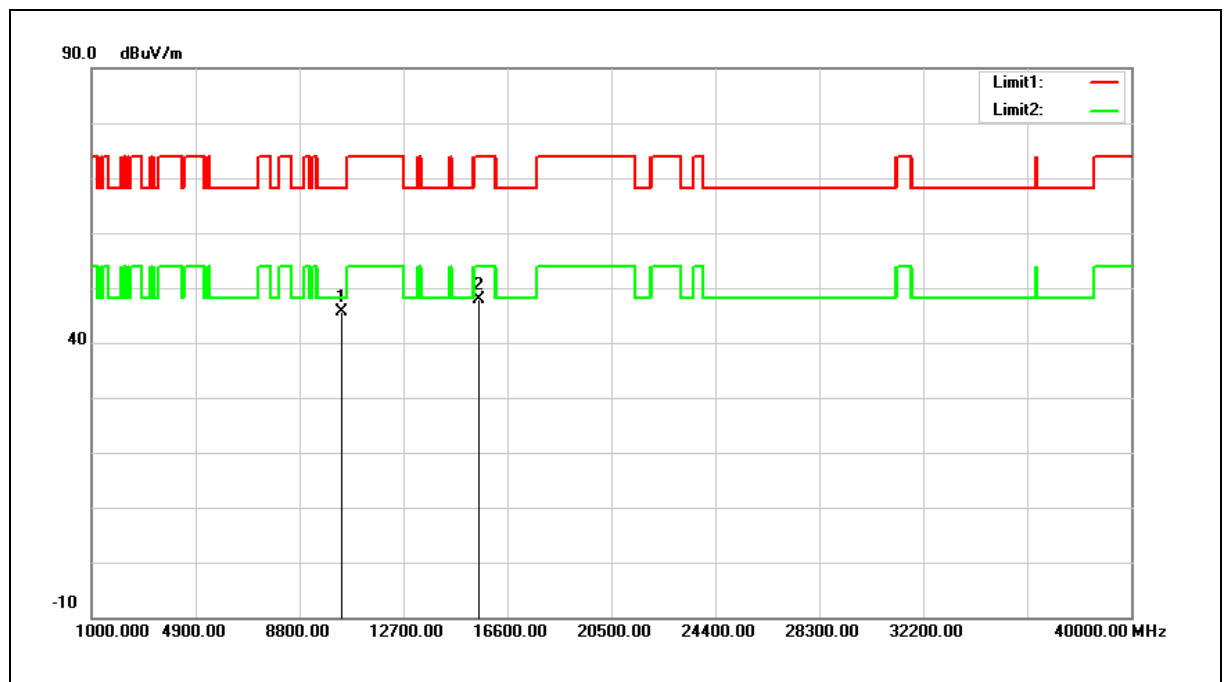

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.00	11.69	45.69	68.20	-22.51	peak
2	15540.000	33.26	14.52	47.78	74.00	-26.22	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 45.69 = 11.69 + 34.00

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

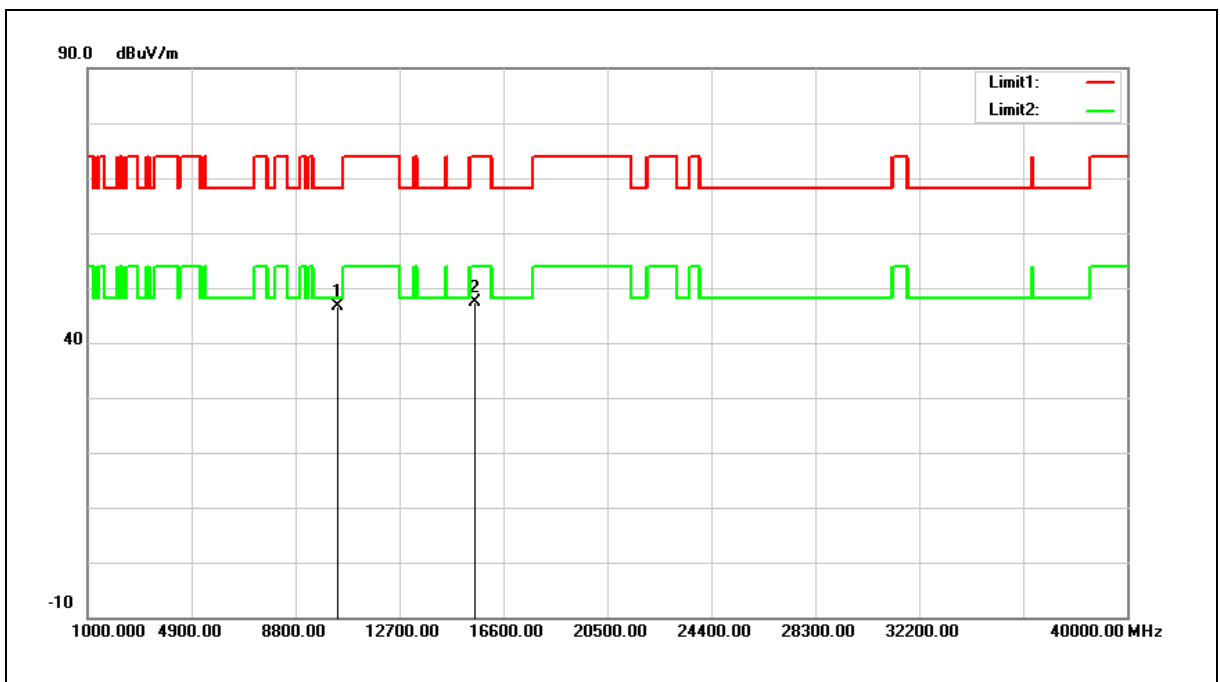

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.01	11.69	46.70	68.20	-21.50	peak
2	15540.000	32.94	14.52	47.46	74.00	-26.54	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $46.70 = 11.69 + 35.01$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

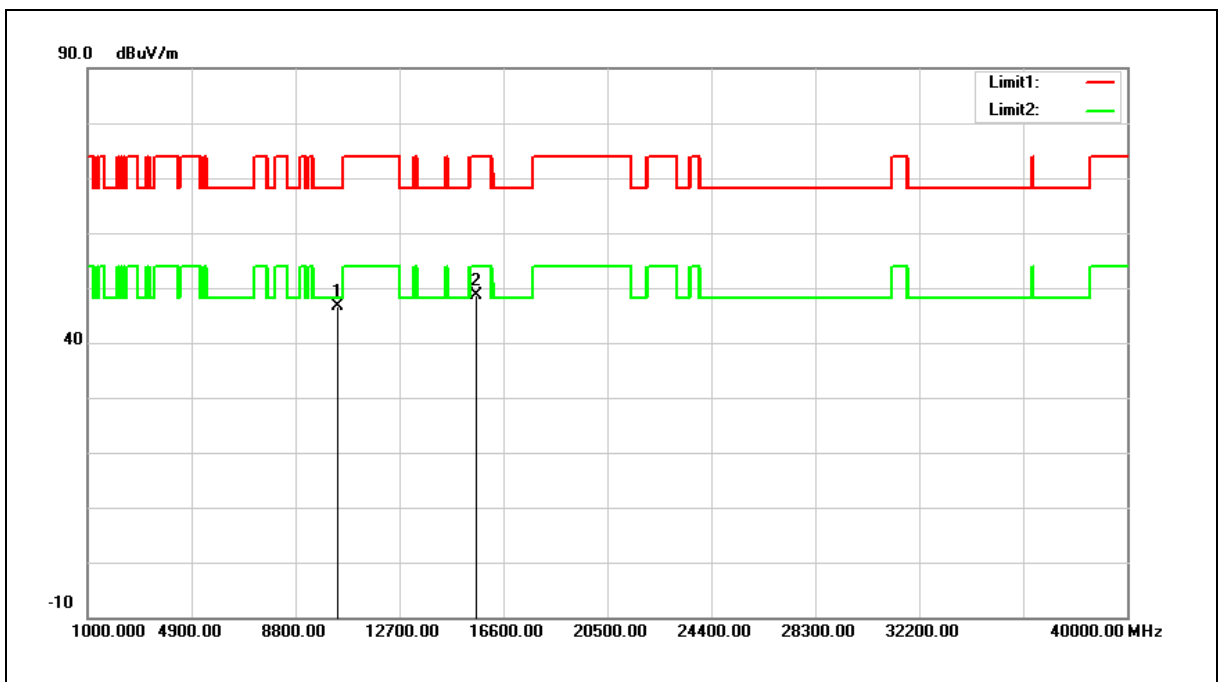


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.89	11.79	46.68	68.20	-21.52	peak
2	15600.000	34.15	14.39	48.54	74.00	-25.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

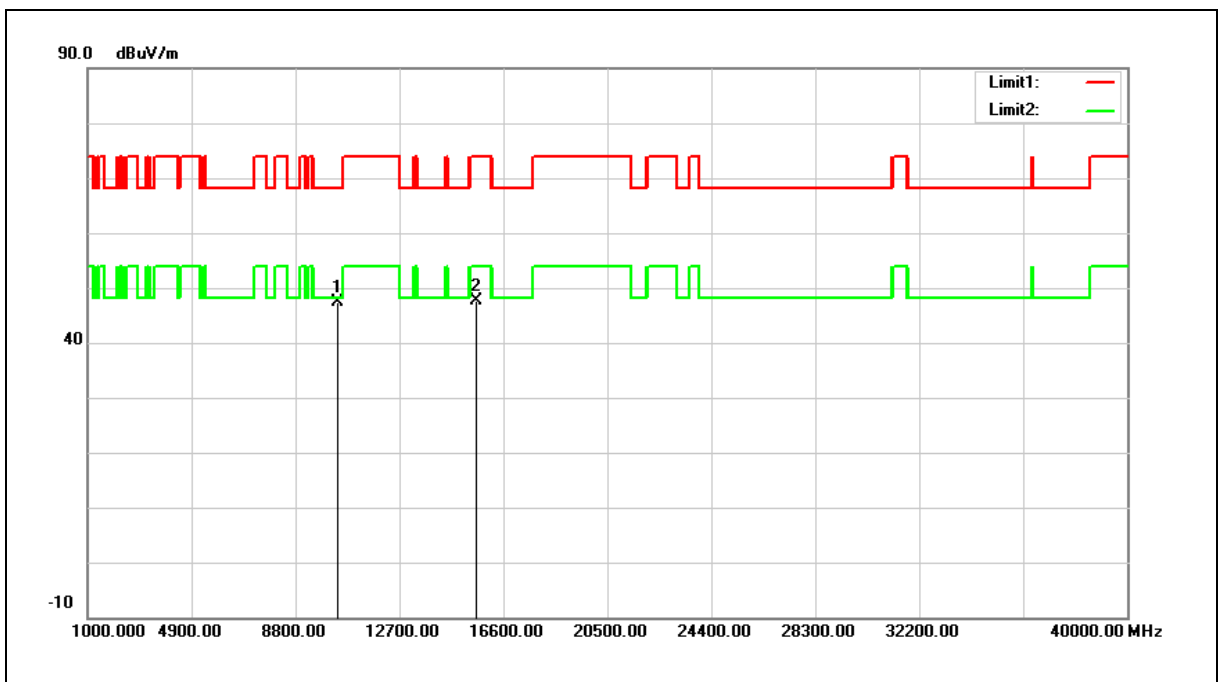


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.53	11.79	47.32	68.20	-20.88	peak
2	15600.000	33.32	14.39	47.71	74.00	-26.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

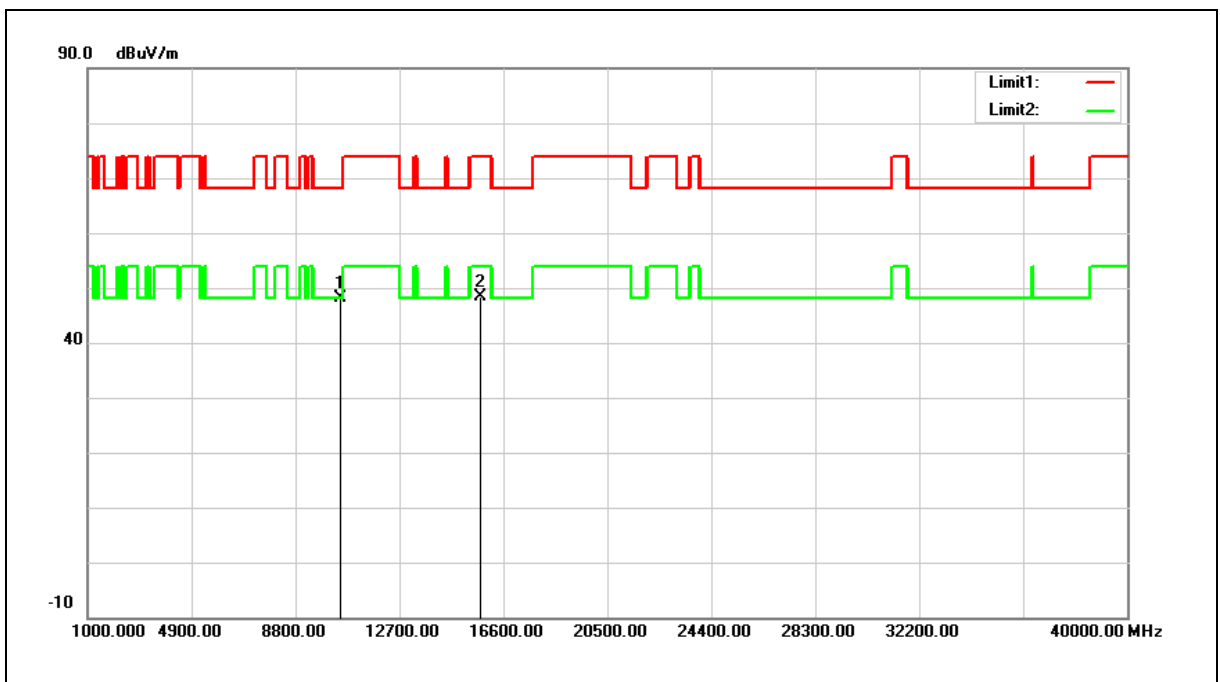


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	36.17	12.00	48.17	68.20	-20.03	peak
2	15720.000	34.21	14.13	48.34	74.00	-25.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

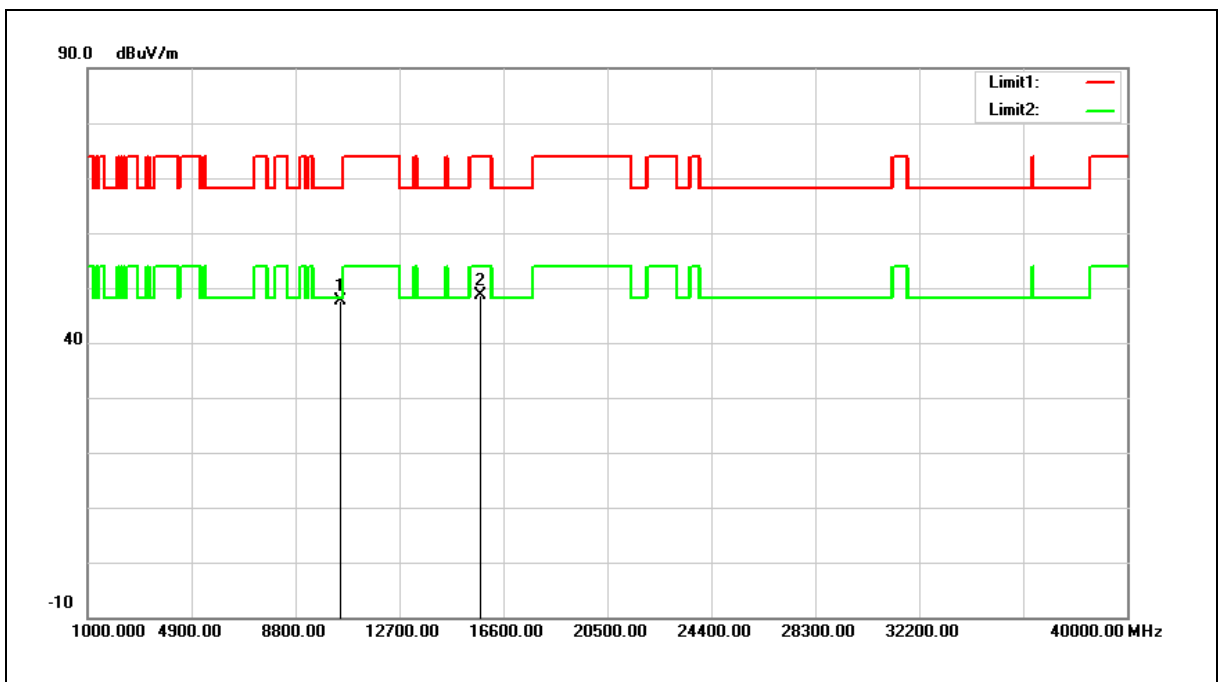


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.65	12.00	47.65	68.20	-20.55	peak
2	15720.000	34.52	14.13	48.65	74.00	-25.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

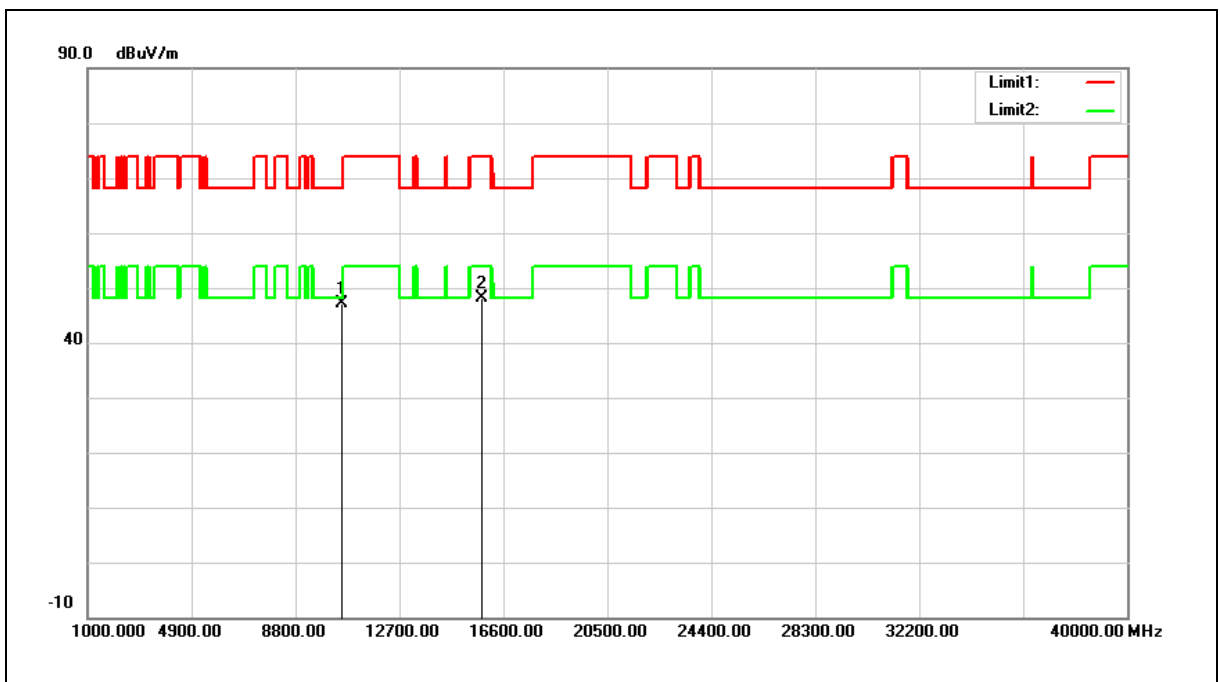


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.06	12.06	47.12	68.20	-21.08	peak
2	15780.000	34.07	14.02	48.09	74.00	-25.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

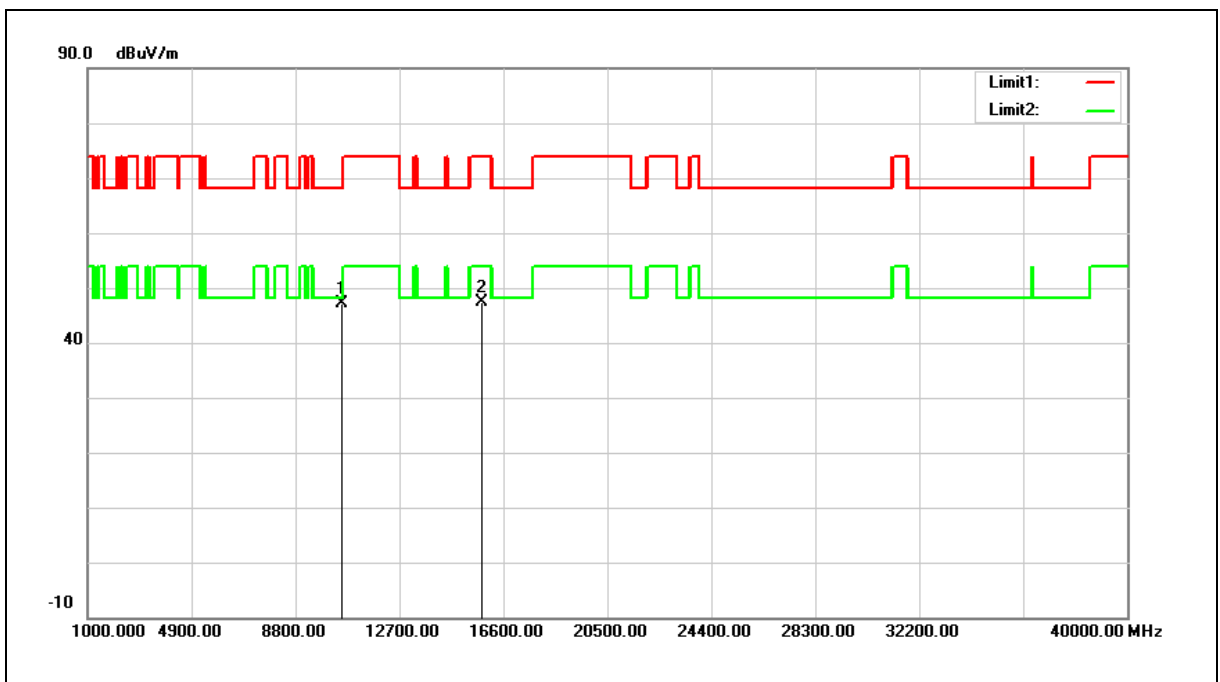


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.14	12.06	47.20	68.20	-21.00	peak
2	15780.000	33.48	14.02	47.50	74.00	-26.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

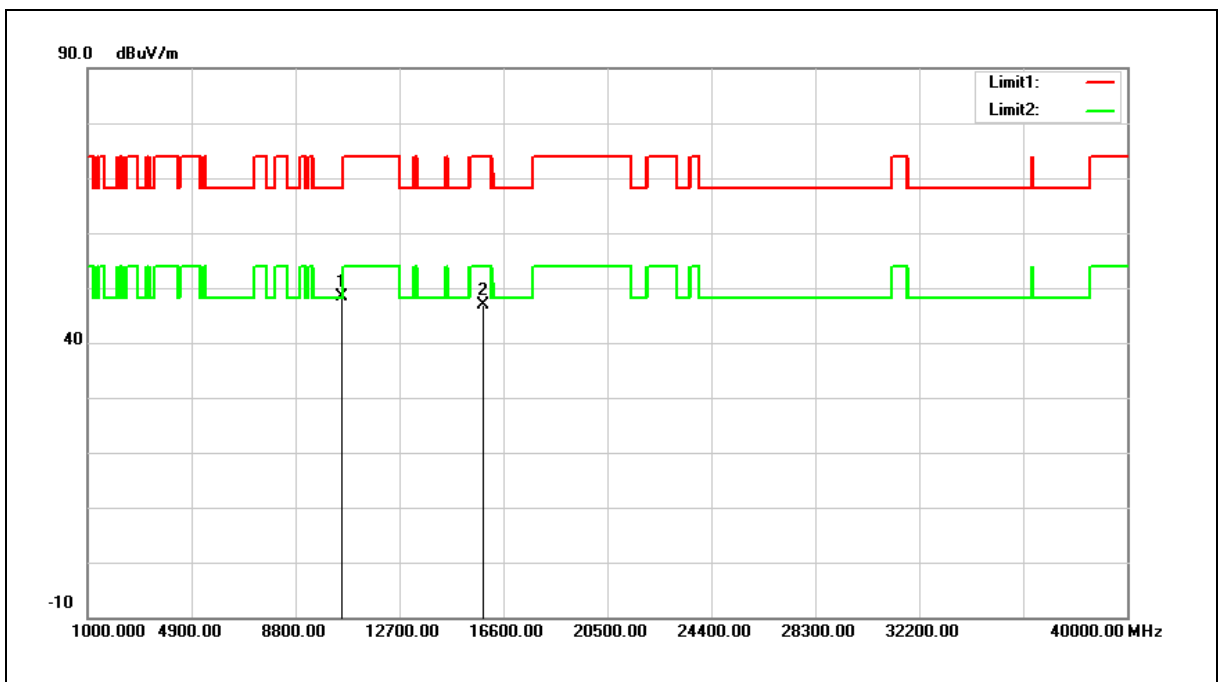


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	36.38	12.09	48.47	68.20	-19.73	peak
2	15840.000	32.95	13.88	46.83	74.00	-27.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

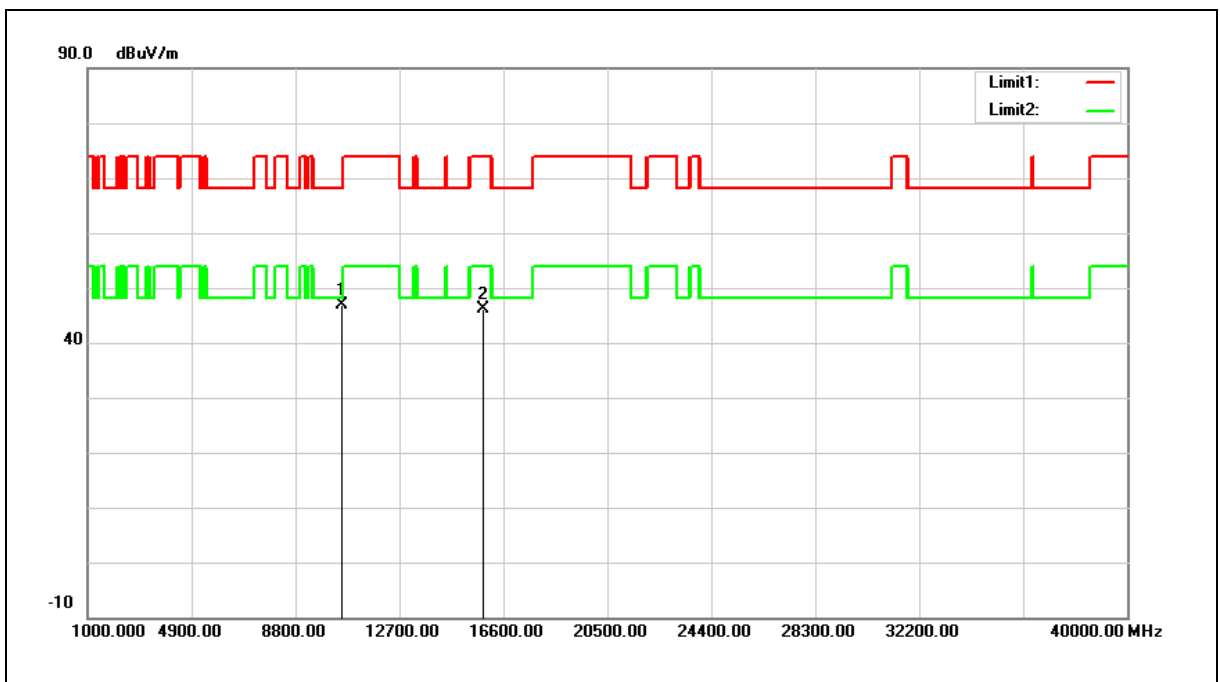


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	34.81	12.09	46.90	68.20	-21.30	peak
2	15840.000	32.34	13.88	46.22	74.00	-27.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

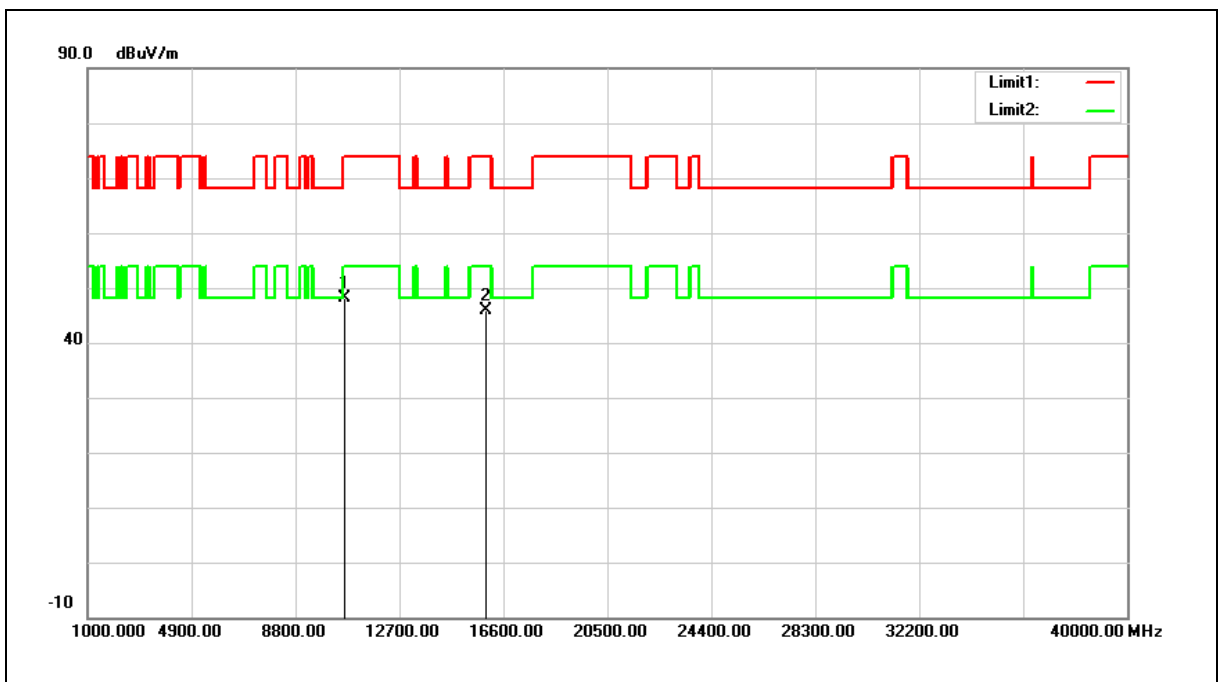


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.93	12.14	48.07	74.00	-25.93	peak
2	15960.000	32.28	13.63	45.91	74.00	-28.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

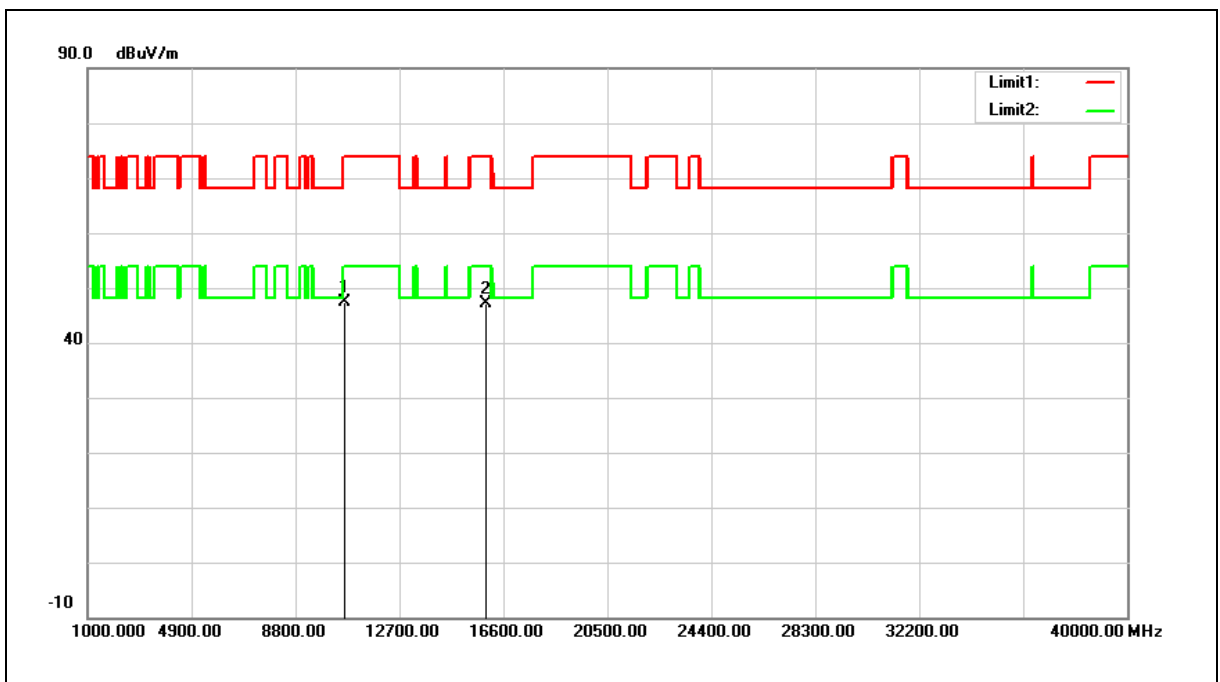


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.15	12.14	47.29	74.00	-26.71	peak
2	15960.000	33.39	13.63	47.02	74.00	-26.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

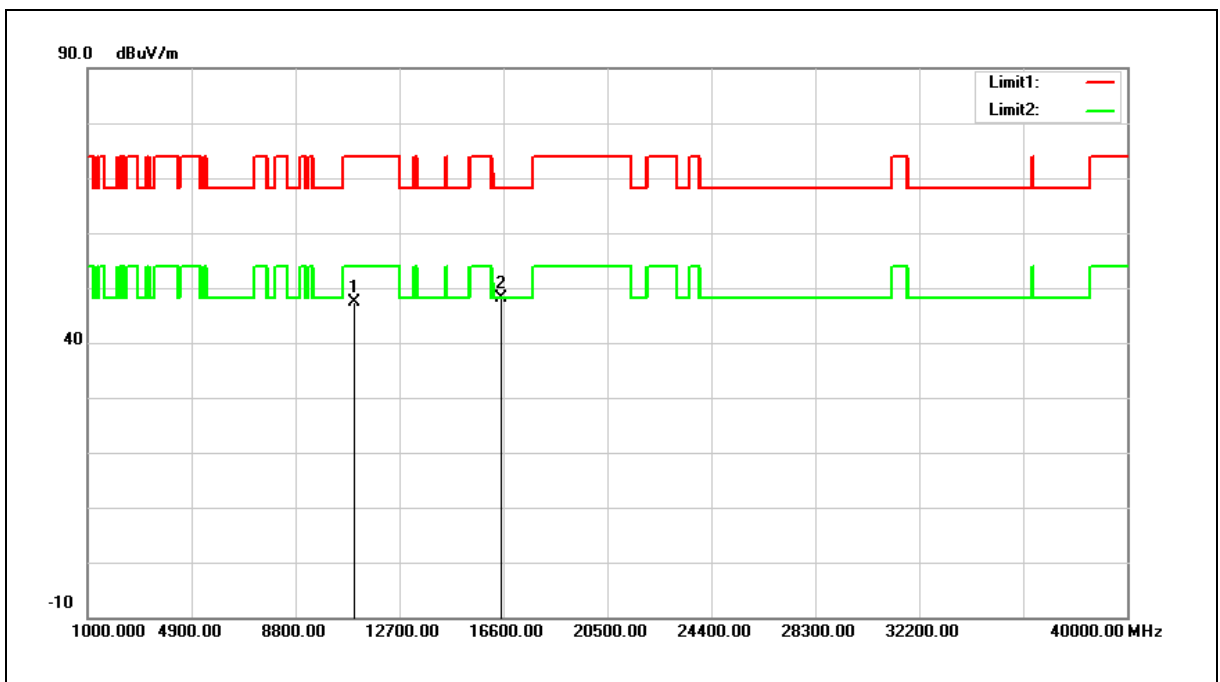


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.00	12.39	47.39	74.00	-26.61	peak
2	16500.000	33.83	14.24	48.07	68.20	-20.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

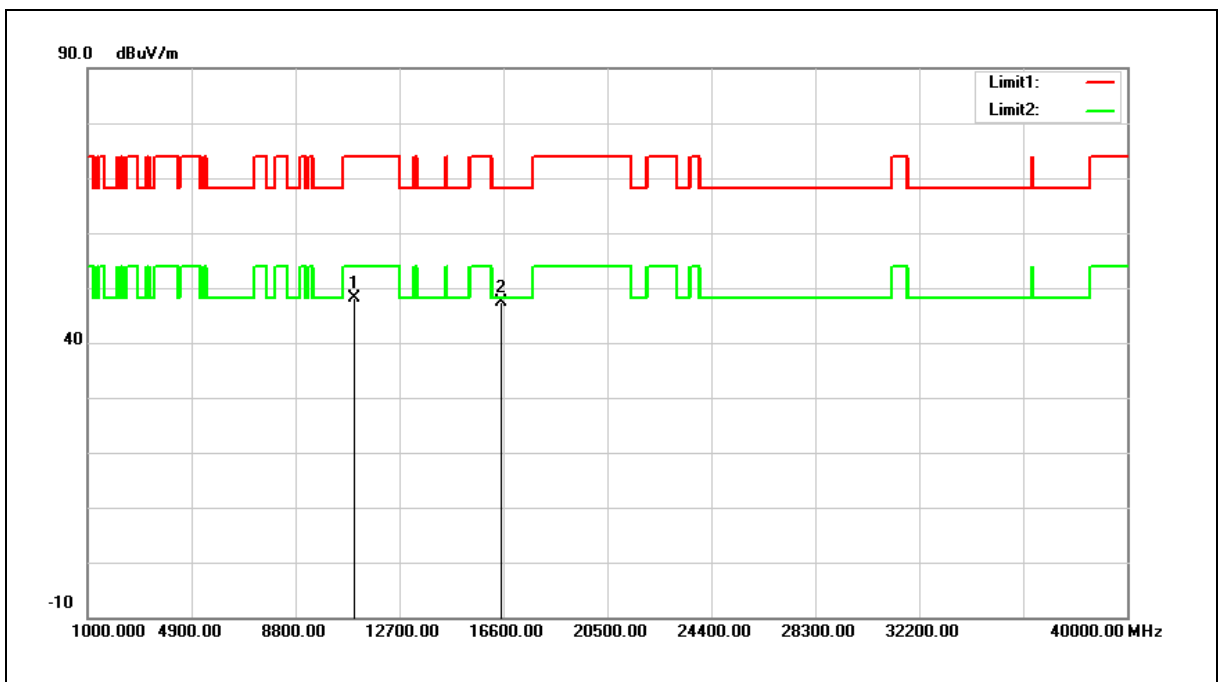


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.81	12.39	48.20	74.00	-25.80	peak
2	16500.000	33.08	14.24	47.32	68.20	-20.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

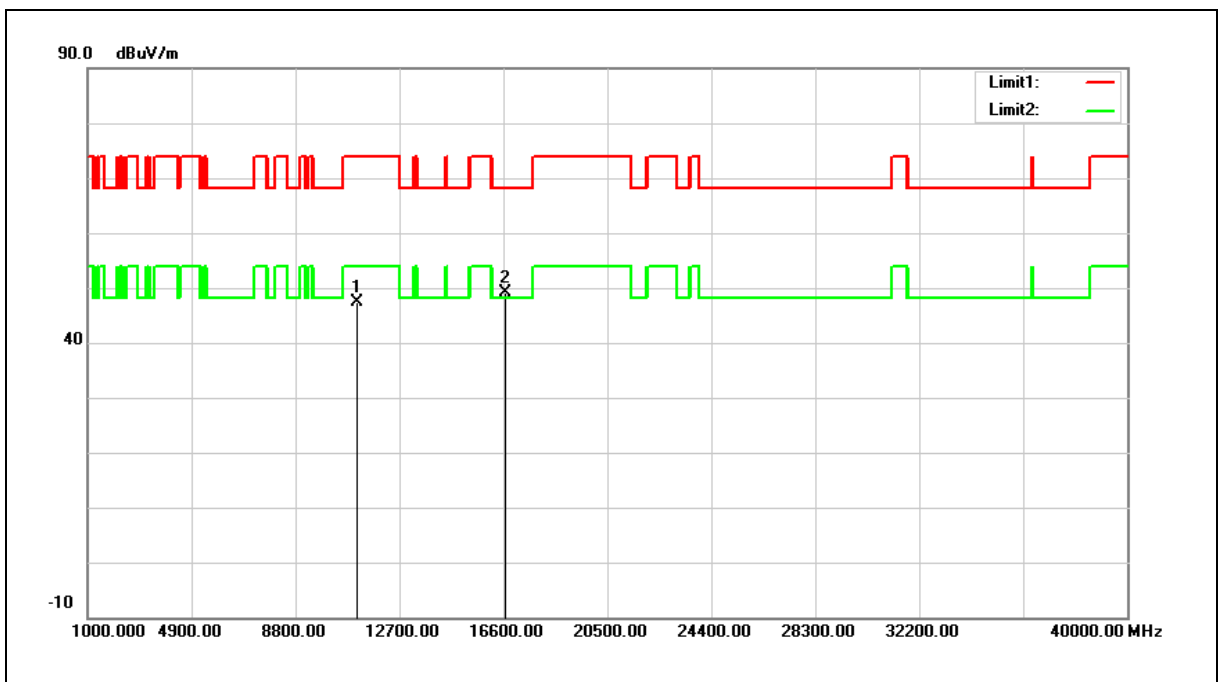


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.00	12.46	47.46	74.00	-26.54	peak
2	16680.000	33.79	15.22	49.01	68.20	-19.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

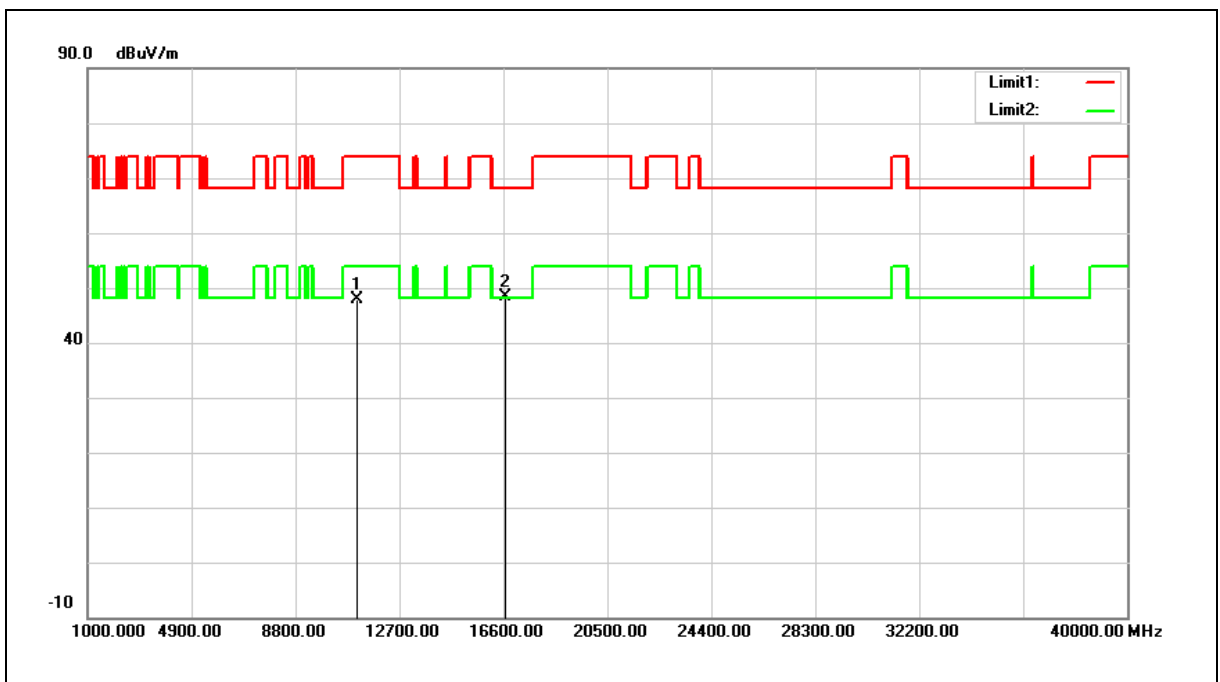


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.40	12.46	47.86	74.00	-26.14	peak
2	16680.000	33.09	15.22	48.31	68.20	-19.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

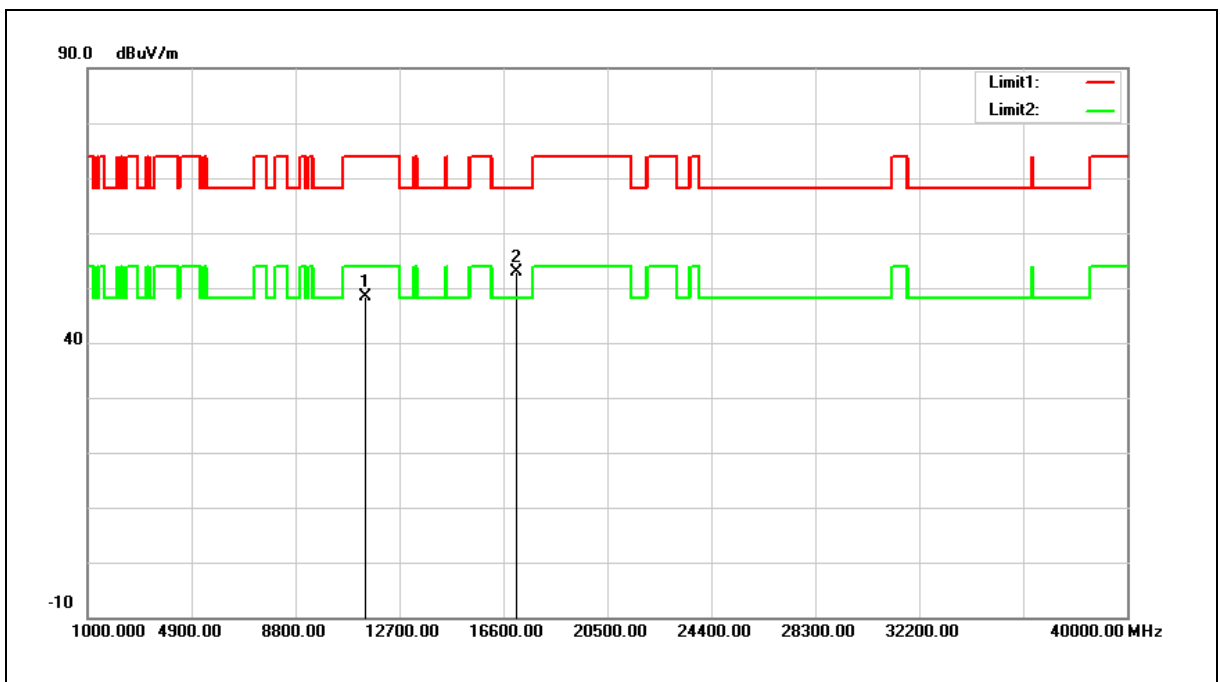


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.82	12.63	48.45	74.00	-25.55	peak
2	17100.000	35.34	17.63	52.97	68.20	-15.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

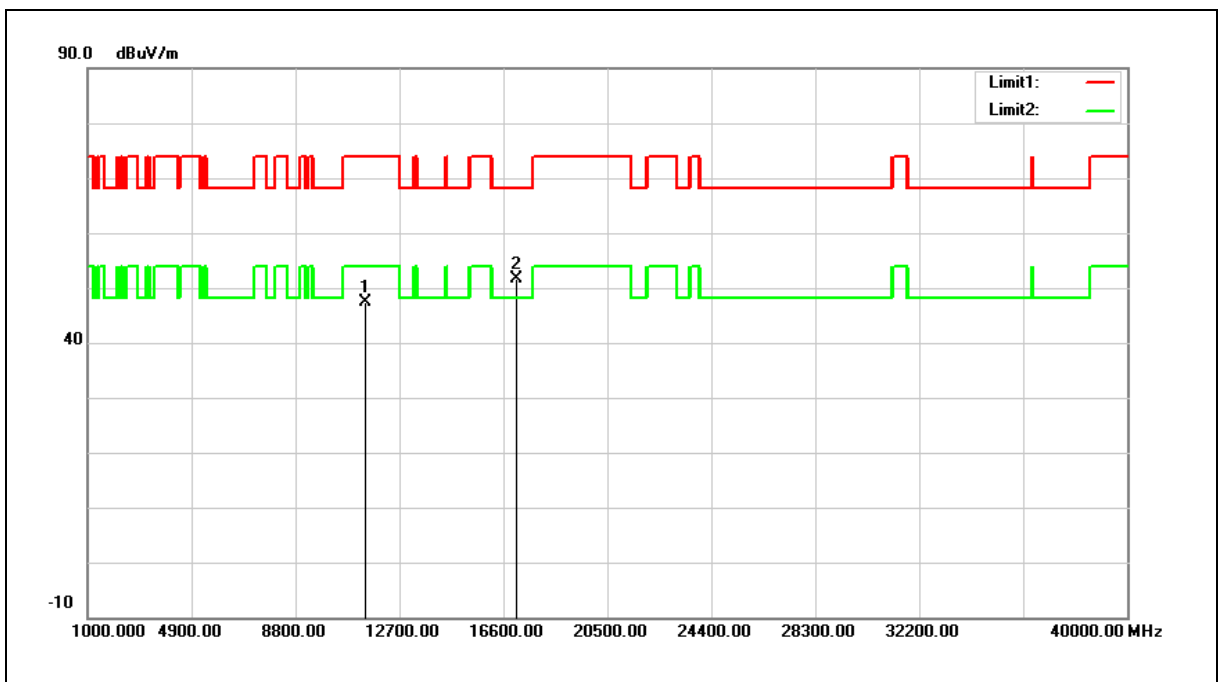


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.66	12.63	47.29	74.00	-26.71	peak
2	17100.000	33.88	17.63	51.51	68.20	-16.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

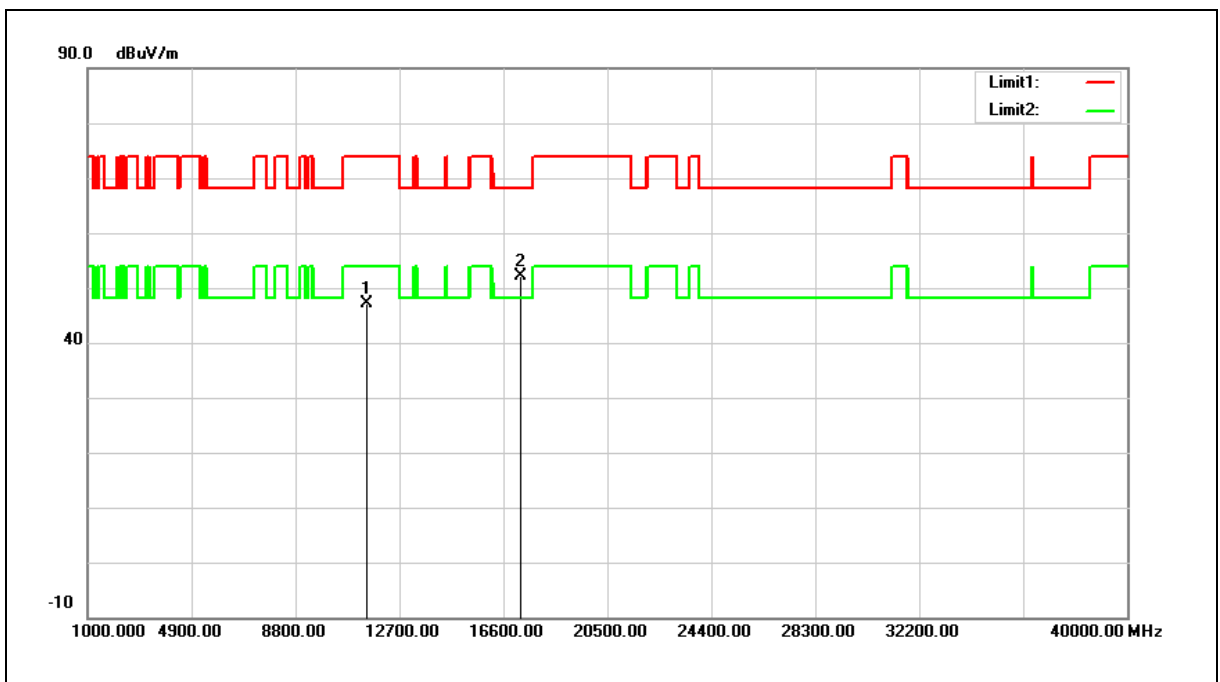


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.34	12.68	47.02	74.00	-26.98	peak
2	17235.000	33.72	18.52	52.24	68.20	-15.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

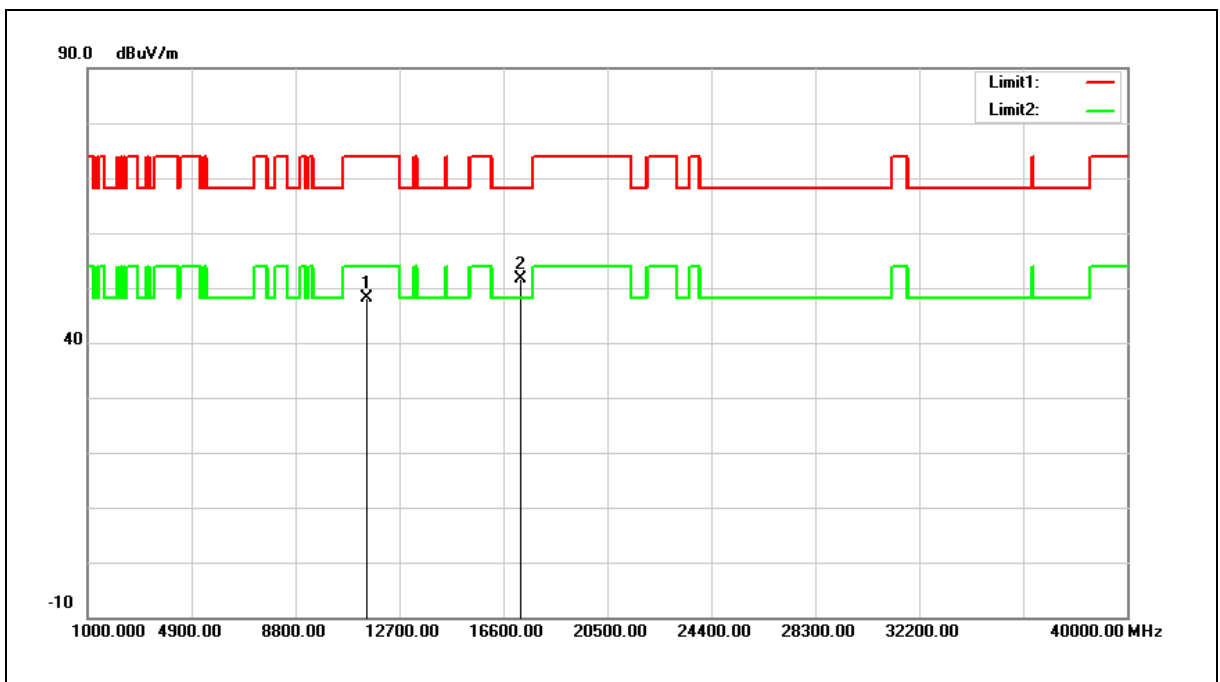


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.57	12.68	48.25	74.00	-25.75	peak
2	17235.000	33.04	18.52	51.56	68.20	-16.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

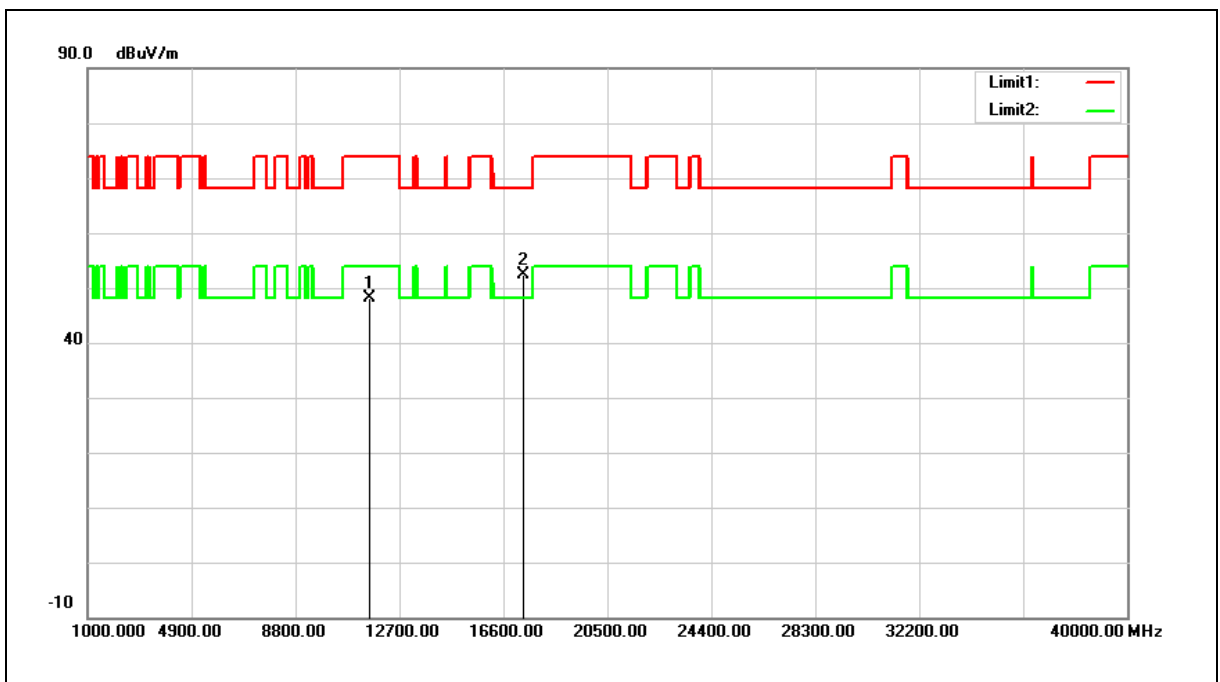


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.42	12.59	48.01	74.00	-25.99	peak
2	17355.000	33.08	19.32	52.40	68.20	-15.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

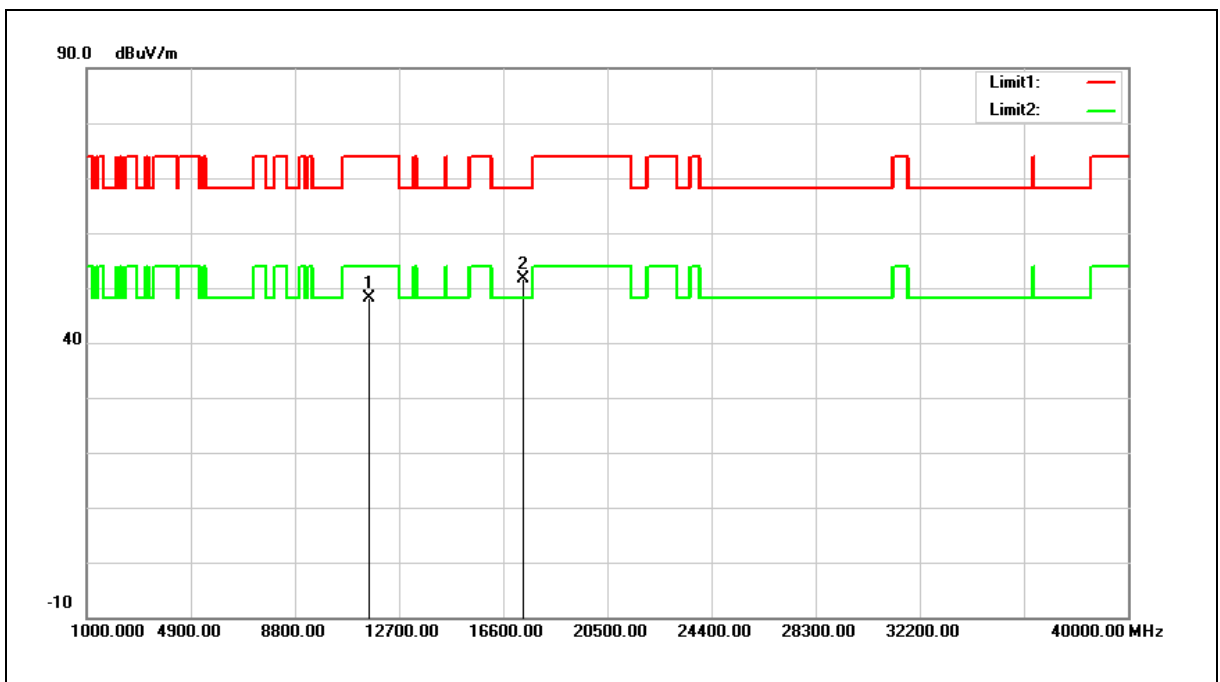


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.50	12.59	48.09	74.00	-25.91	peak
2	17355.000	32.32	19.32	51.64	68.20	-16.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

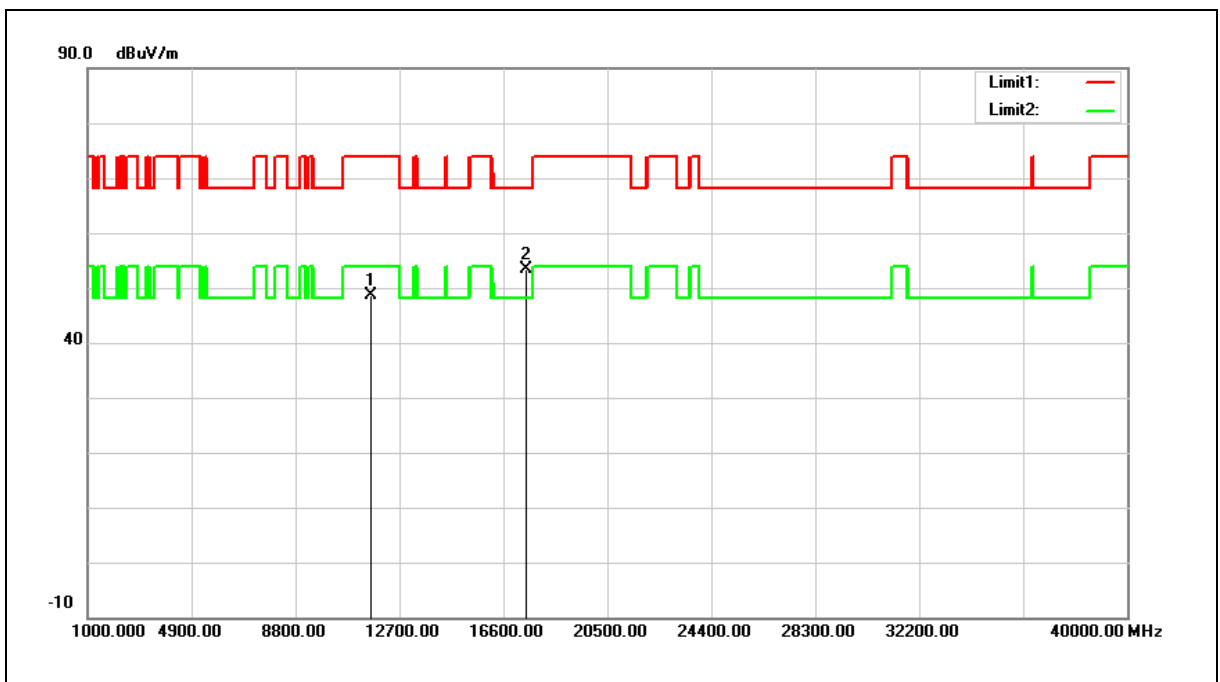


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	36.23	12.48	48.71	74.00	-25.29	peak
2	17475.000	33.20	20.13	53.33	68.20	-14.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

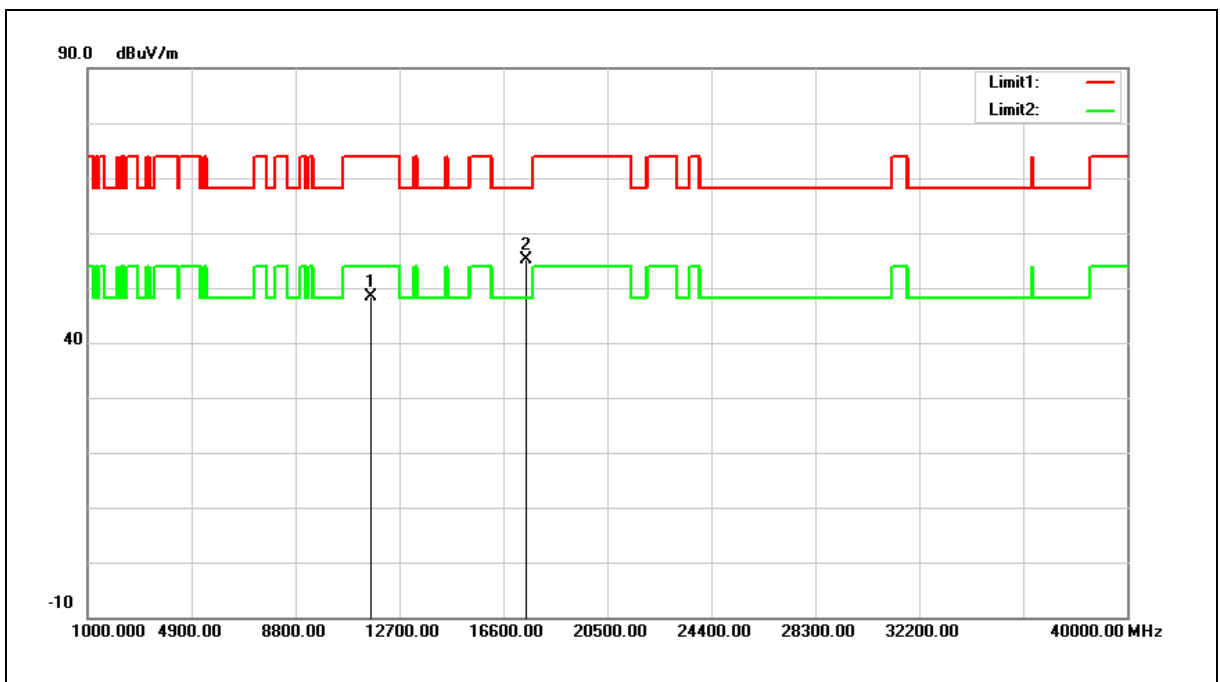


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.79	12.48	48.27	74.00	-25.73	peak
2	17475.000	34.96	20.13	55.09	68.20	-13.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

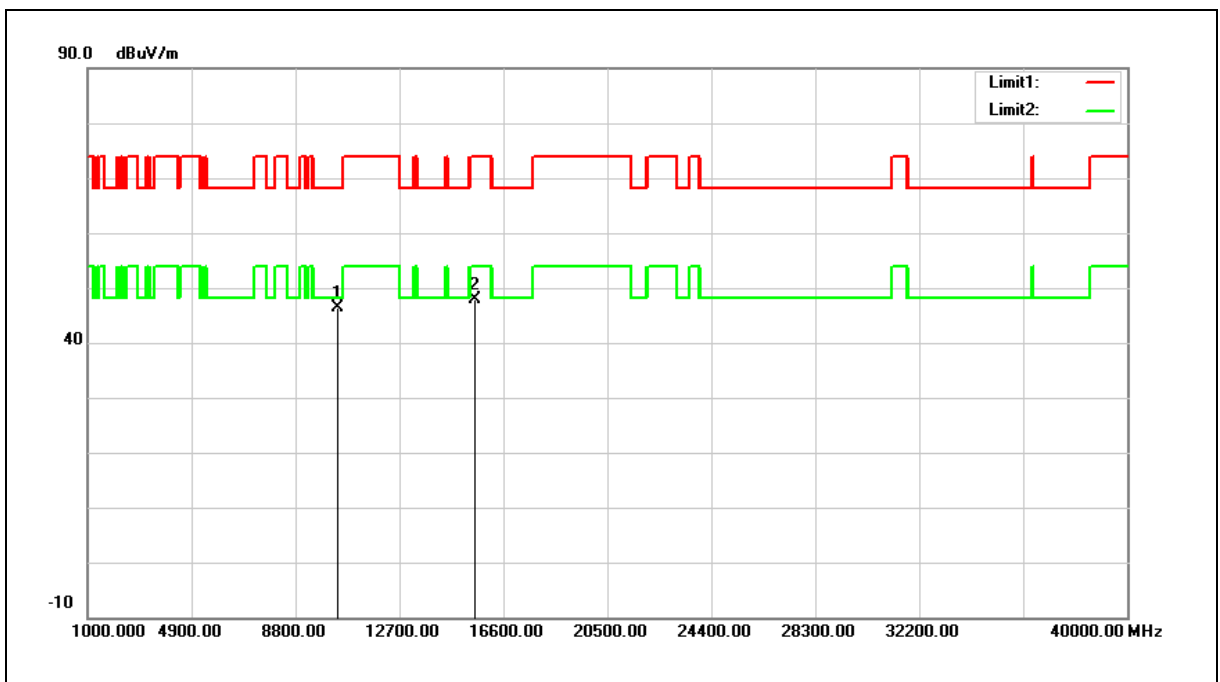


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.67	11.69	46.36	68.20	-21.84	peak
2	15540.000	33.39	14.52	47.91	74.00	-26.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

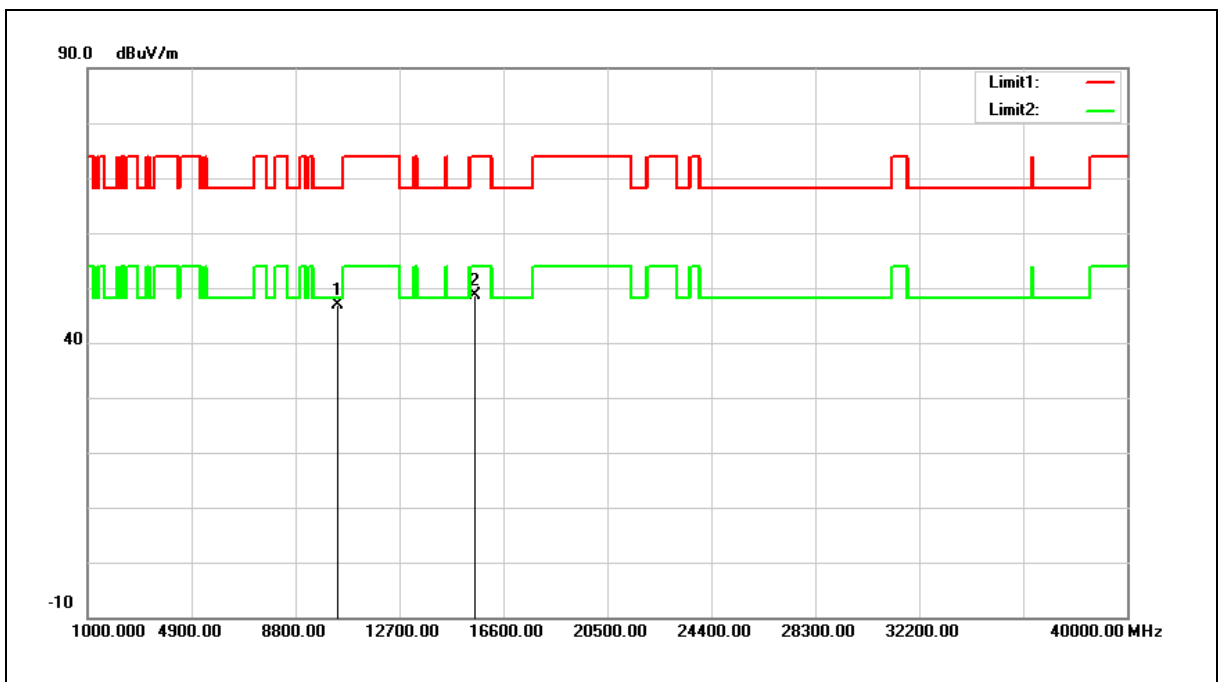


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.18	11.69	46.87	68.20	-21.33	peak
2	15540.000	34.22	14.52	48.74	74.00	-25.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

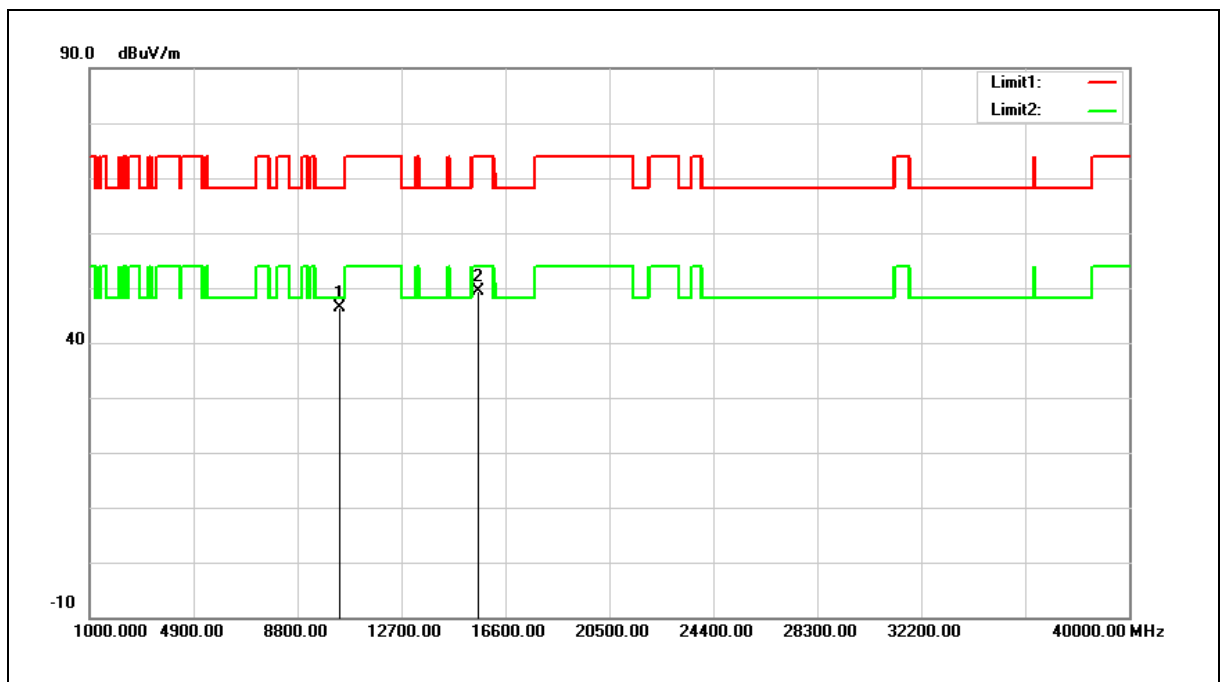


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.61	11.79	46.40	68.20	-21.80	peak
2	15600.000	35.02	14.39	49.41	74.00	-24.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

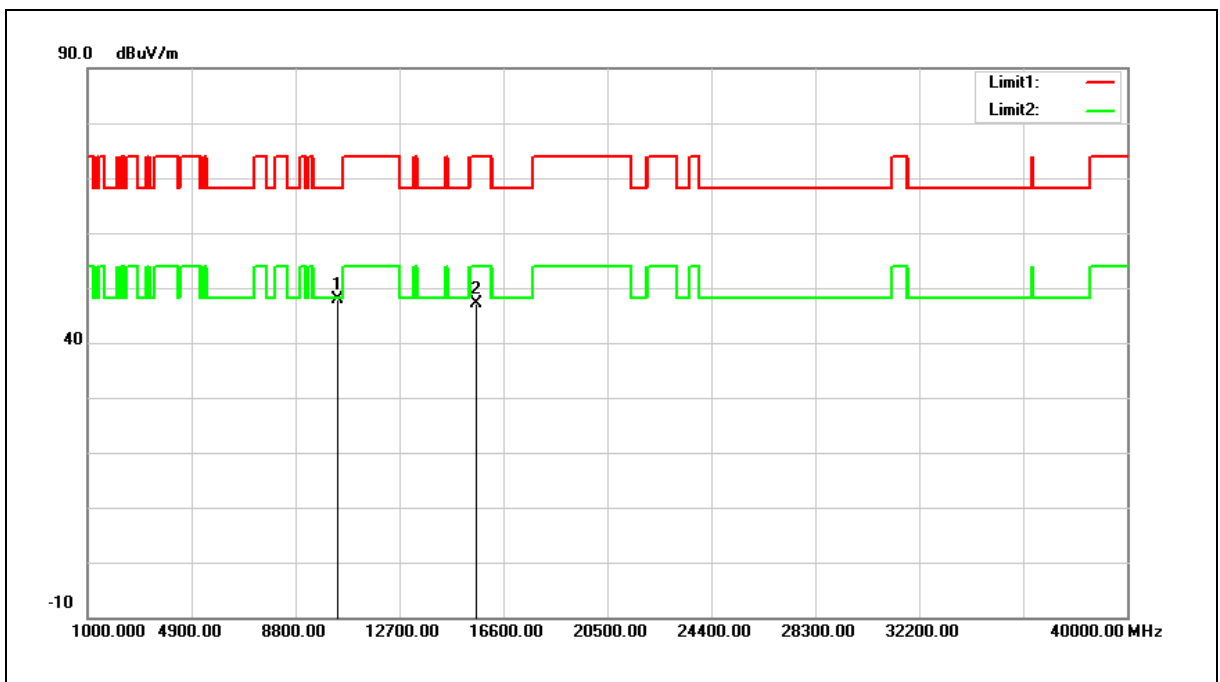


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.02	11.79	47.81	68.20	-20.39	peak
2	15600.000	32.82	14.39	47.21	74.00	-26.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

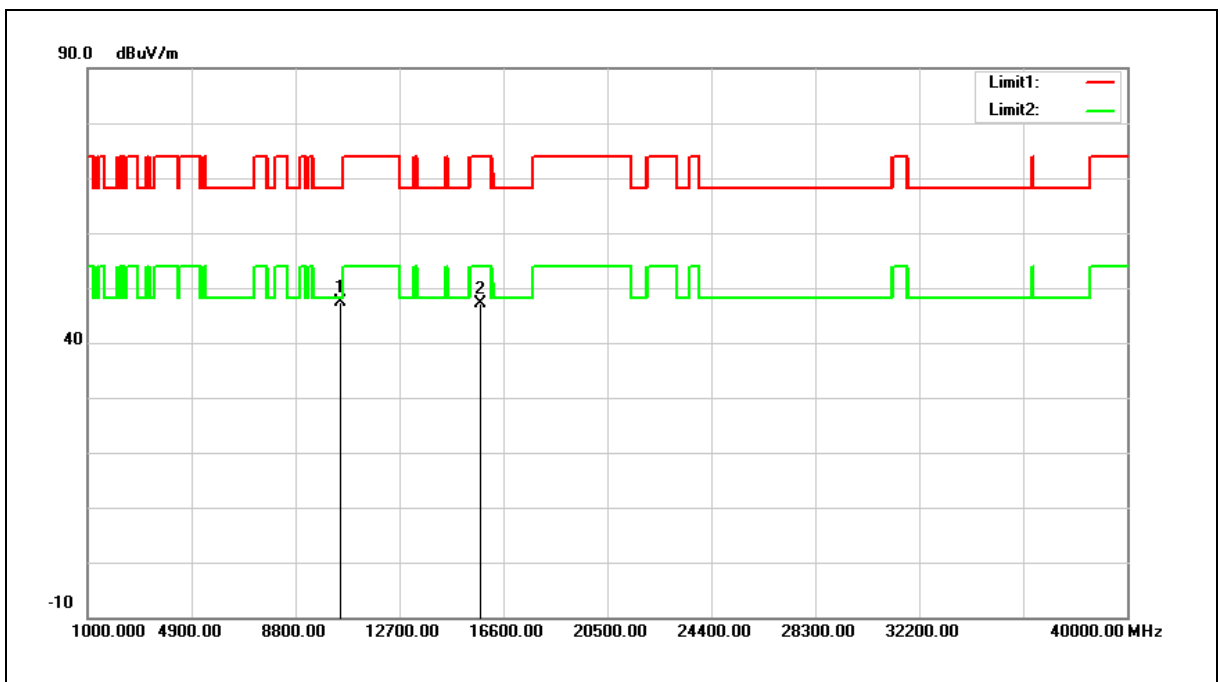


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.30	12.00	47.30	68.20	-20.90	peak
2	15720.000	32.96	14.13	47.09	74.00	-26.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

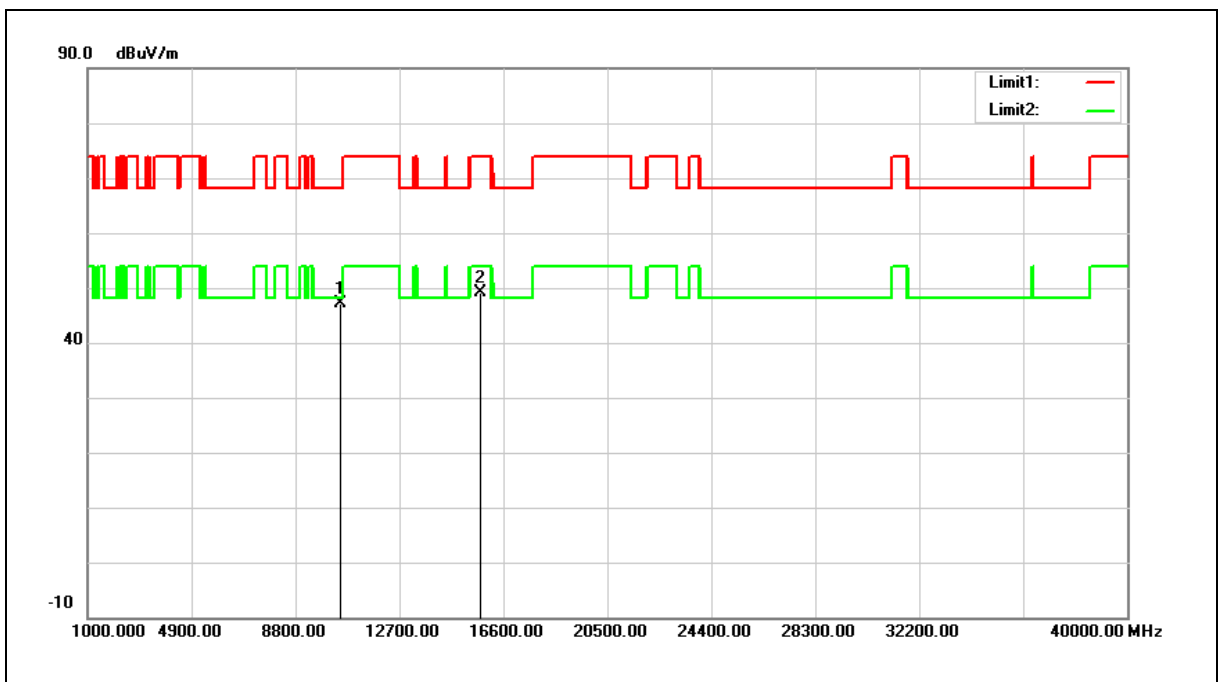


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.06	12.00	47.06	68.20	-21.14	peak
2	15720.000	34.94	14.13	49.07	74.00	-24.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

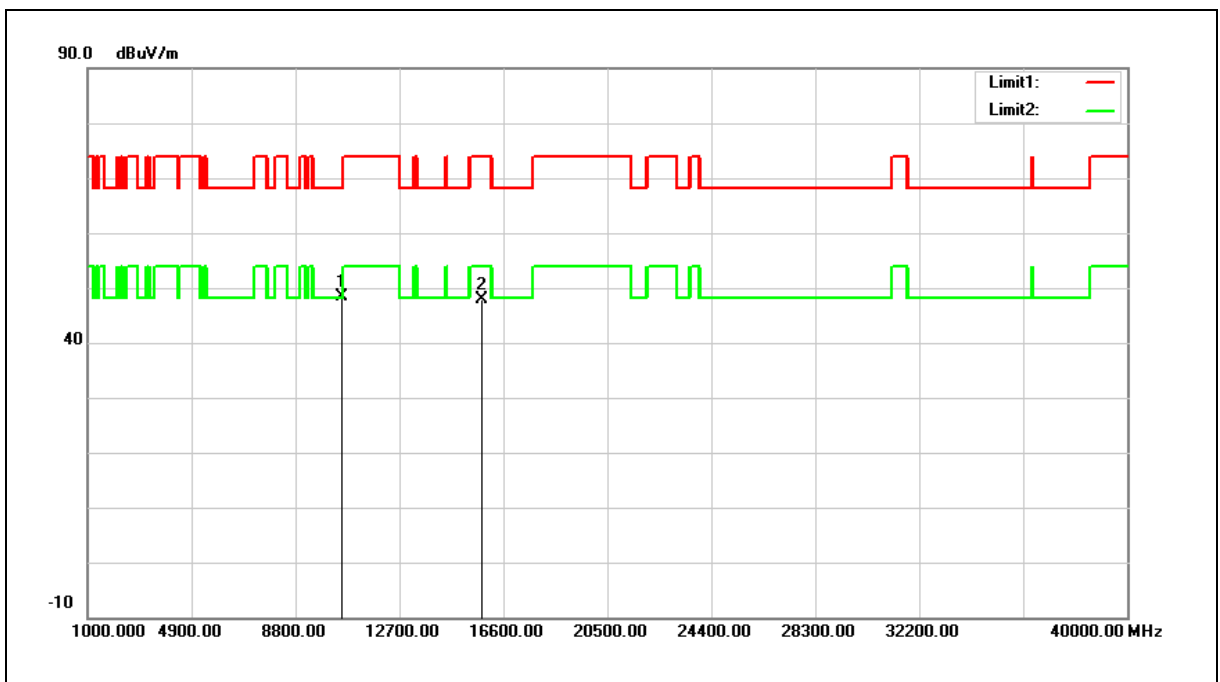


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	36.27	12.06	48.33	68.20	-19.87	peak
2	15780.000	33.79	14.02	47.81	74.00	-26.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

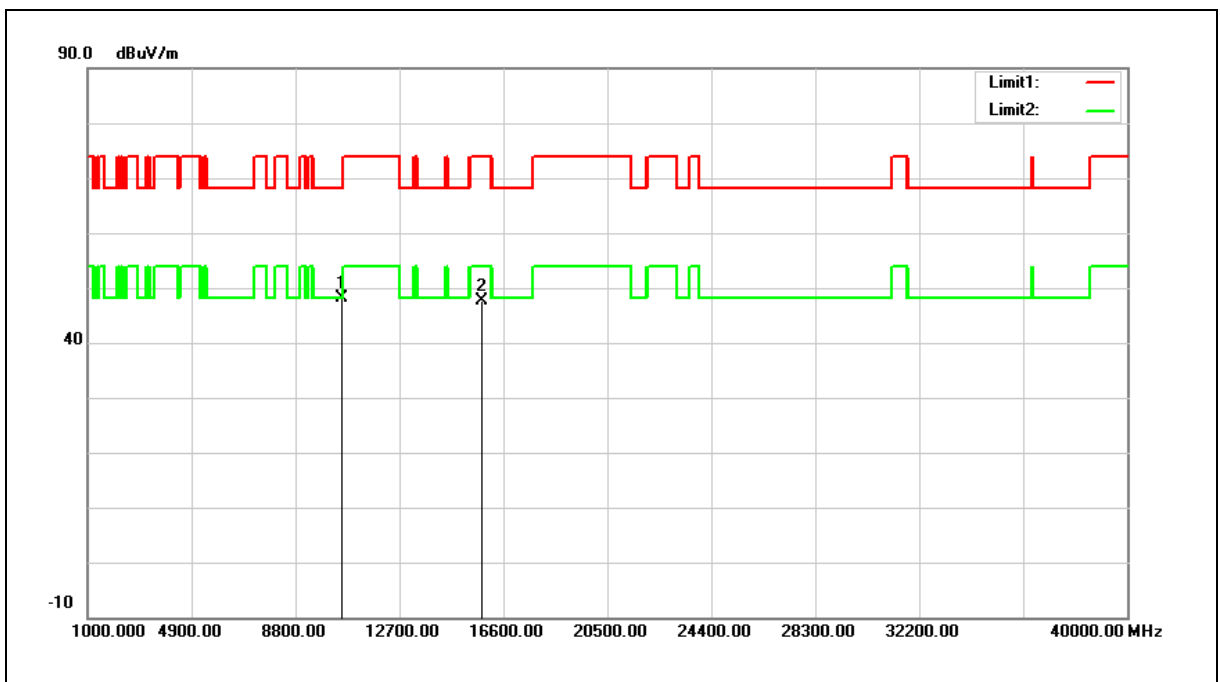


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	36.03	12.06	48.09	68.20	-20.11	peak
2	15780.000	33.52	14.02	47.54	74.00	-26.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

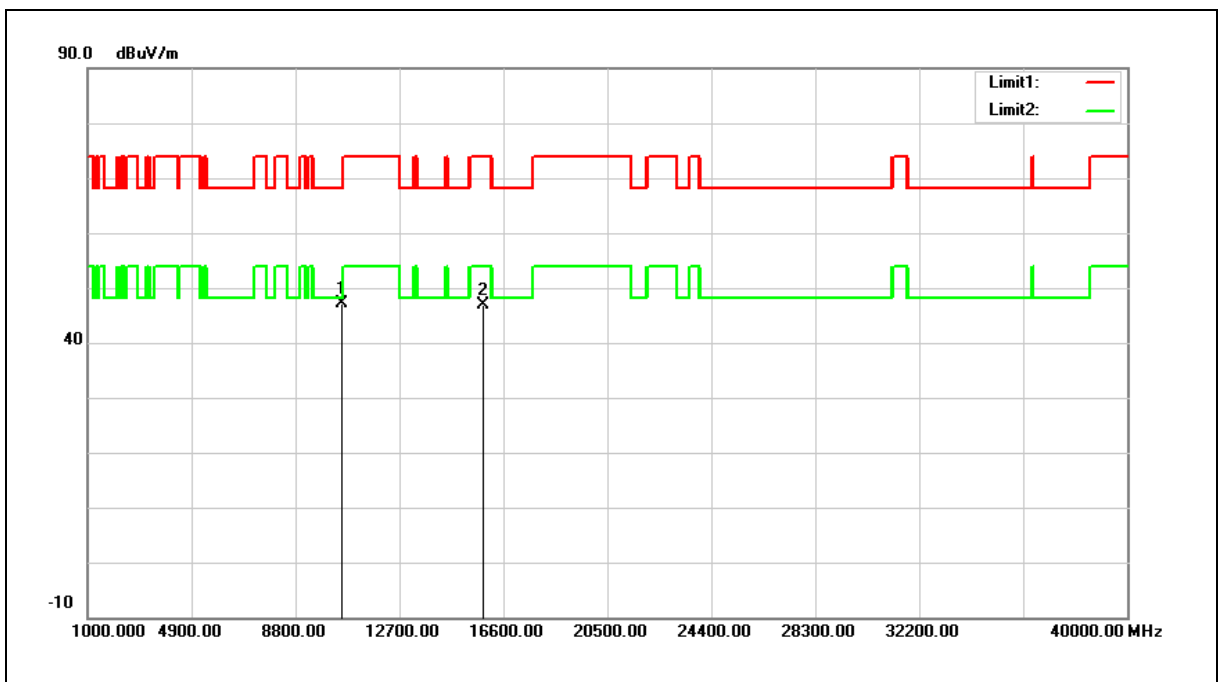


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.07	12.09	47.16	68.20	-21.04	peak
2	15840.000	33.06	13.88	46.94	74.00	-27.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

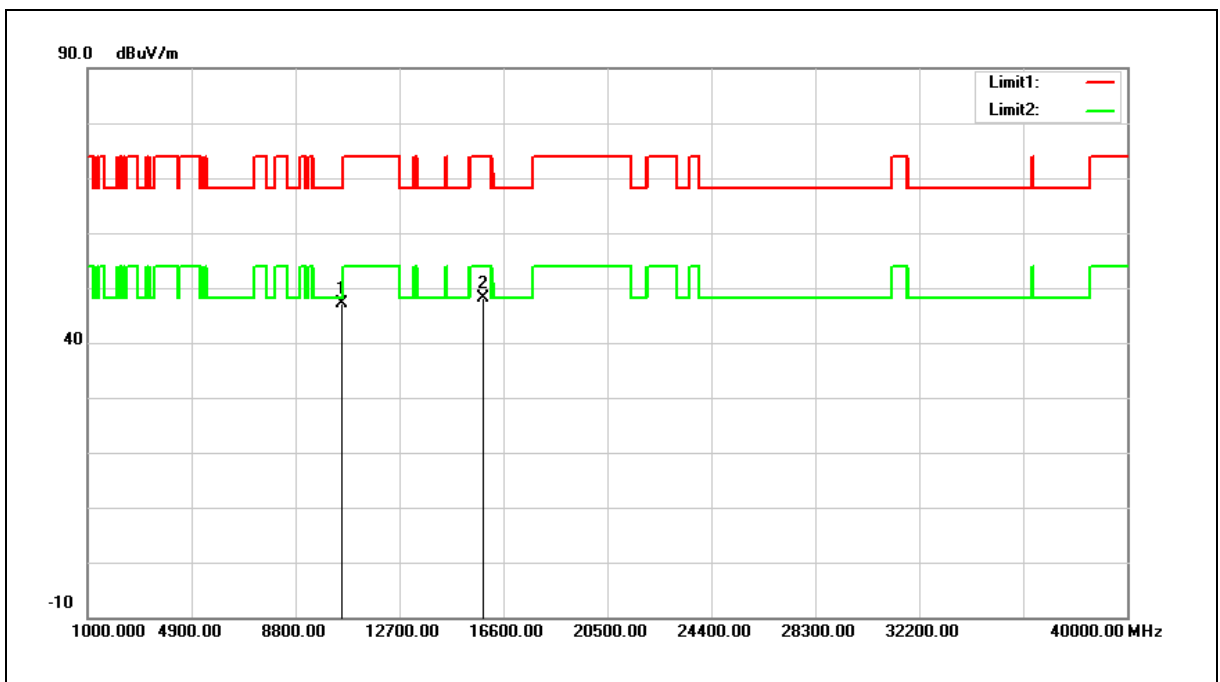


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	34.94	12.09	47.03	68.20	-21.17	peak
2	15840.000	34.22	13.88	48.10	74.00	-25.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

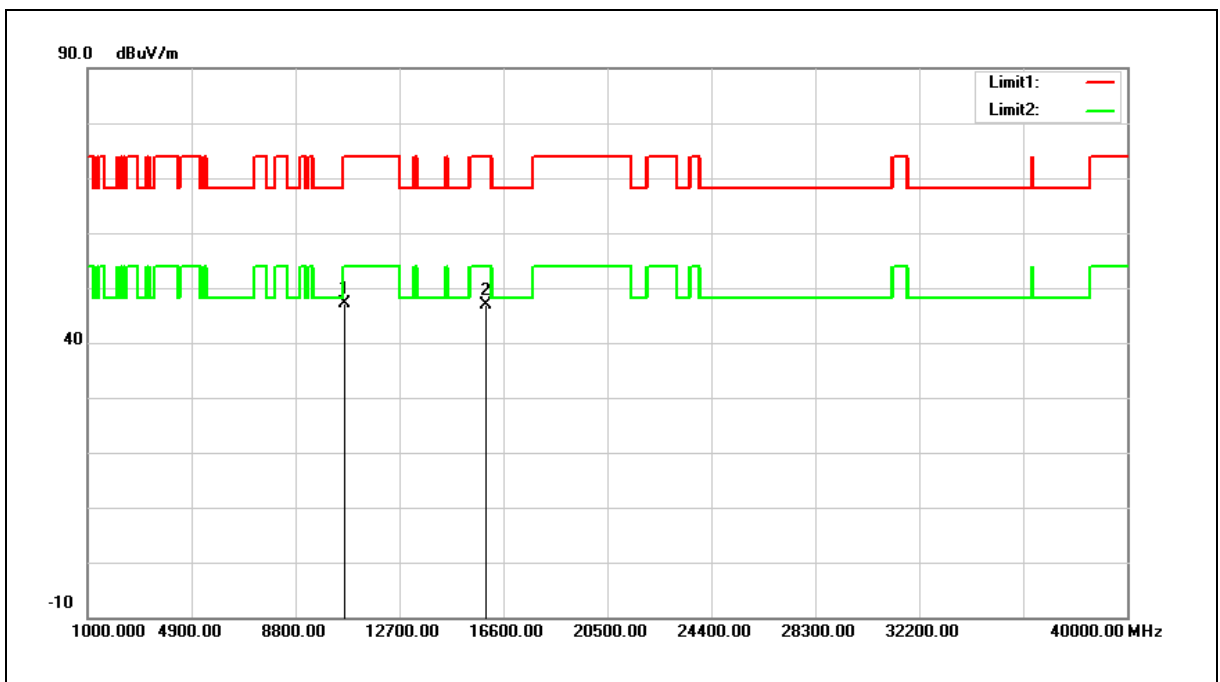


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.94	12.14	47.08	74.00	-26.92	peak
2	15960.000	33.16	13.63	46.79	74.00	-27.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

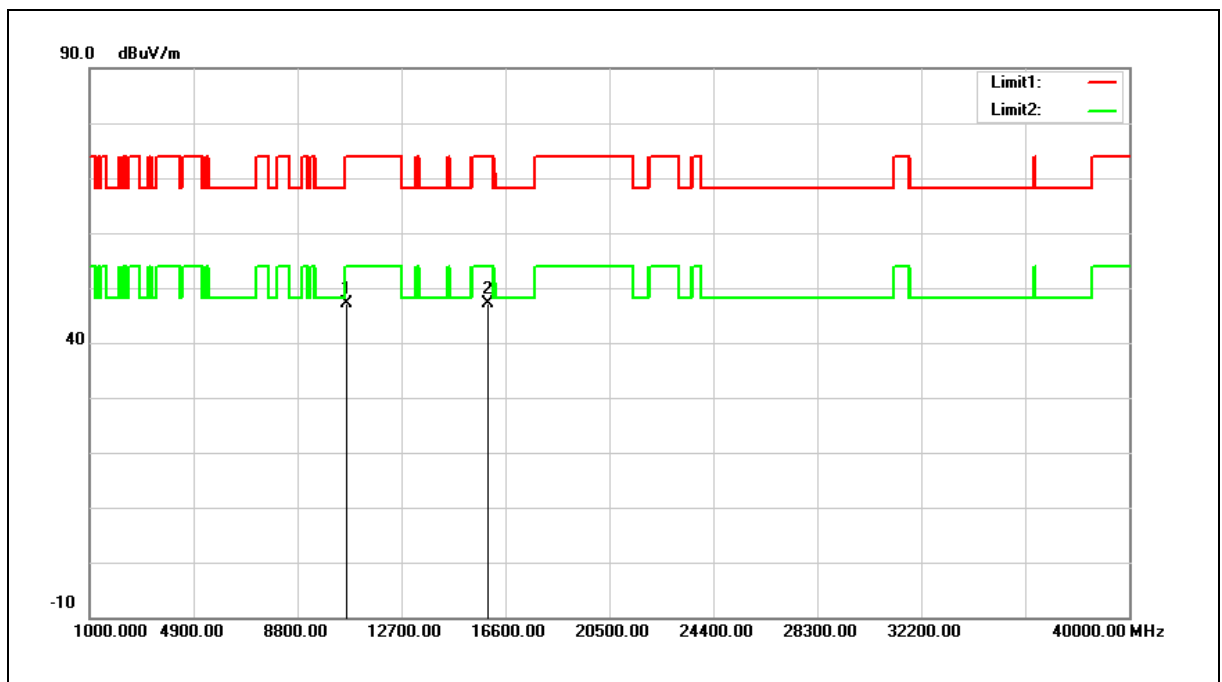


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.02	12.14	47.16	74.00	-26.84	peak
2	15960.000	33.43	13.63	47.06	74.00	-26.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

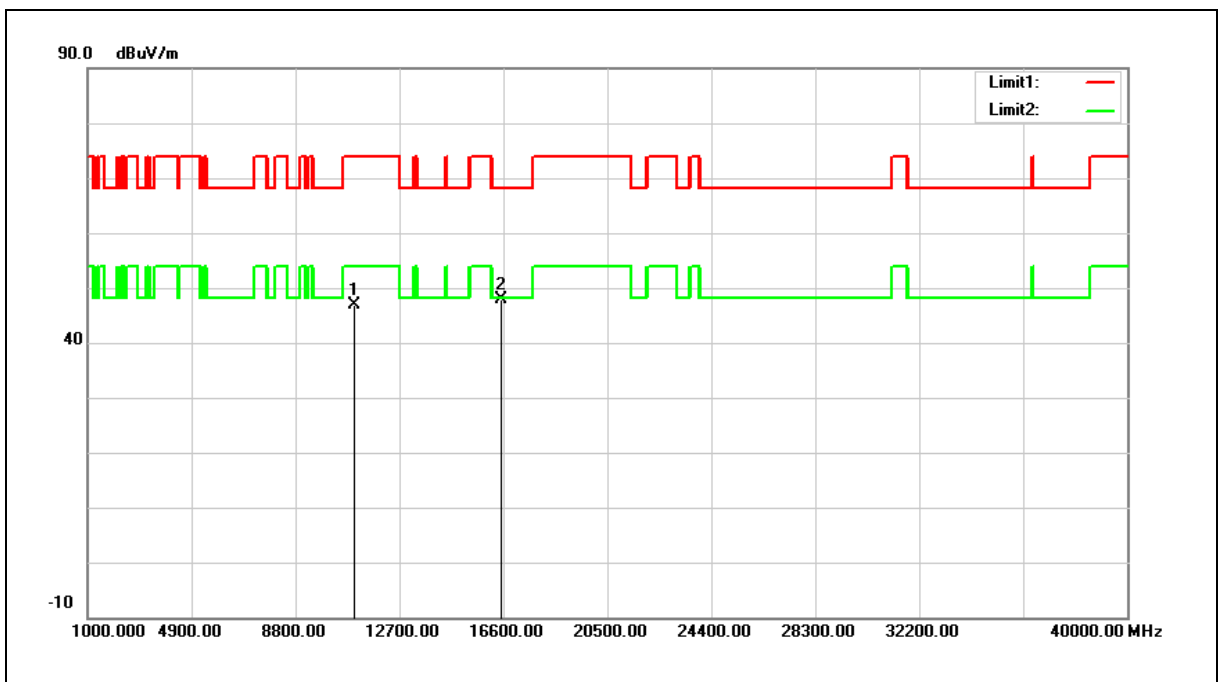


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.47	12.39	46.86	74.00	-27.14	peak
2	16500.000	33.63	14.24	47.87	68.20	-20.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

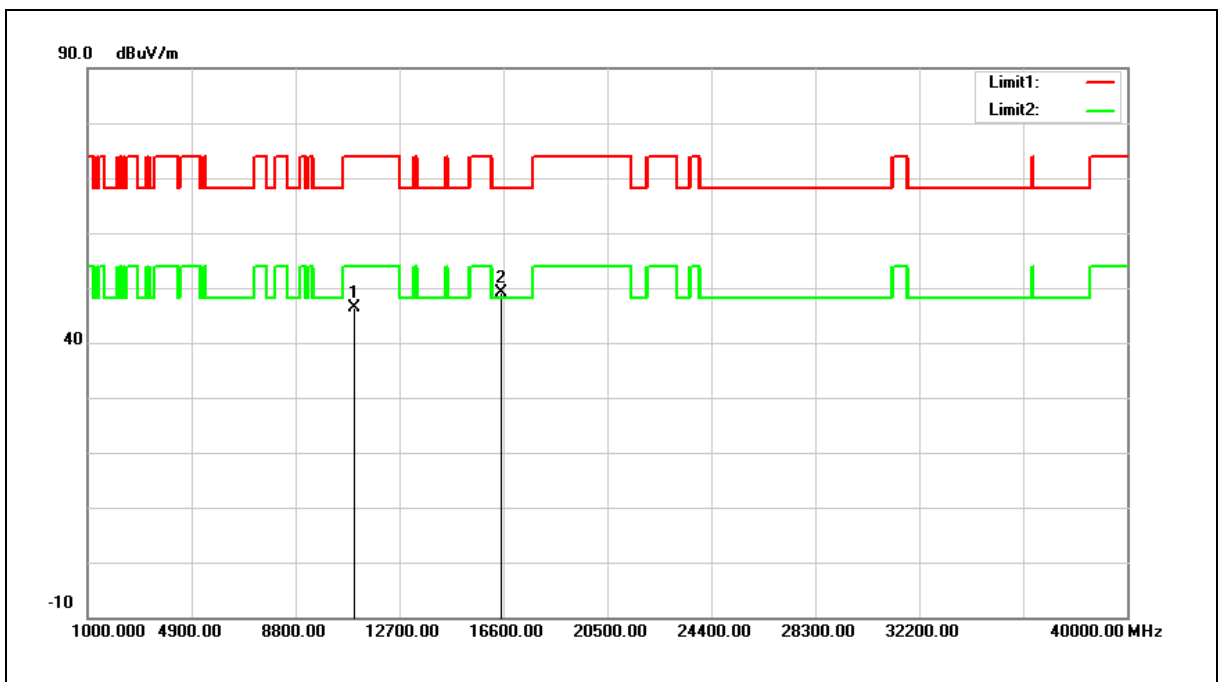


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.05	12.39	46.44	74.00	-27.56	peak
2	16500.000	34.88	14.24	49.12	68.20	-19.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

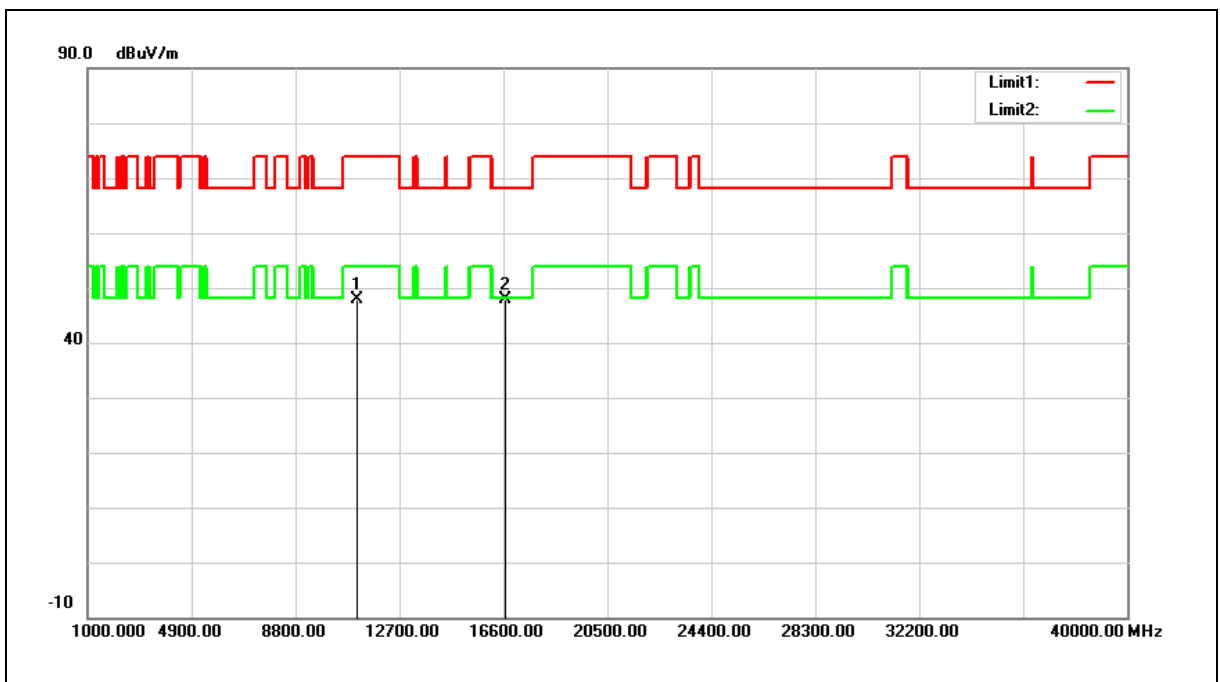


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.48	12.46	47.94	74.00	-26.06	peak
2	16680.000	32.71	15.22	47.93	68.20	-20.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

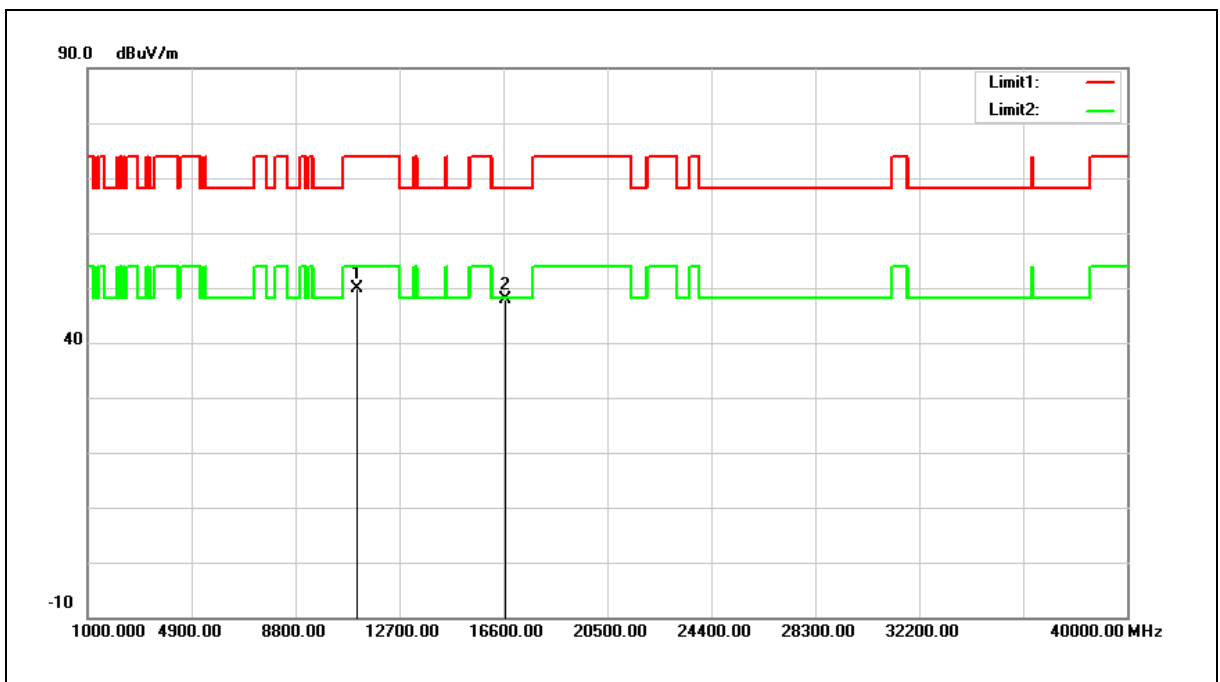


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	37.40	12.46	49.86	74.00	-24.14	peak
2	16680.000	32.77	15.22	47.99	68.20	-20.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

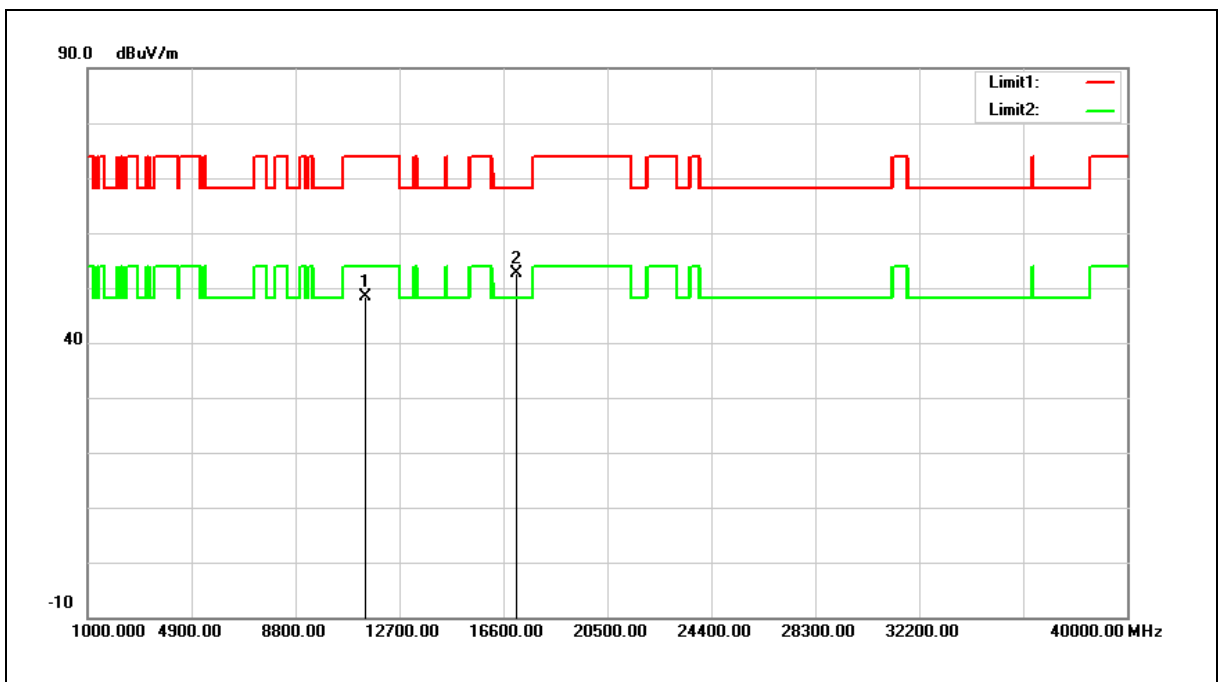


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.87	12.63	48.50	74.00	-25.50	peak
2	17100.000	34.88	17.63	52.51	68.20	-15.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

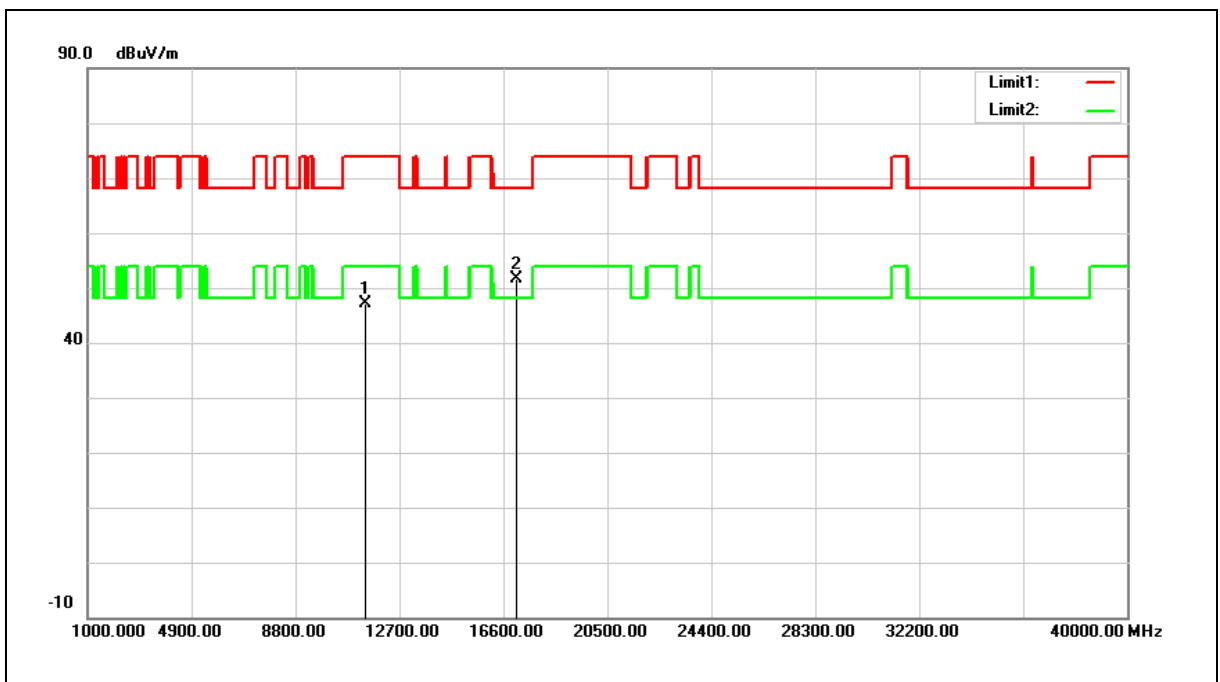


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.42	12.63	47.05	74.00	-26.95	peak
2	17100.000	33.89	17.63	51.52	68.20	-16.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

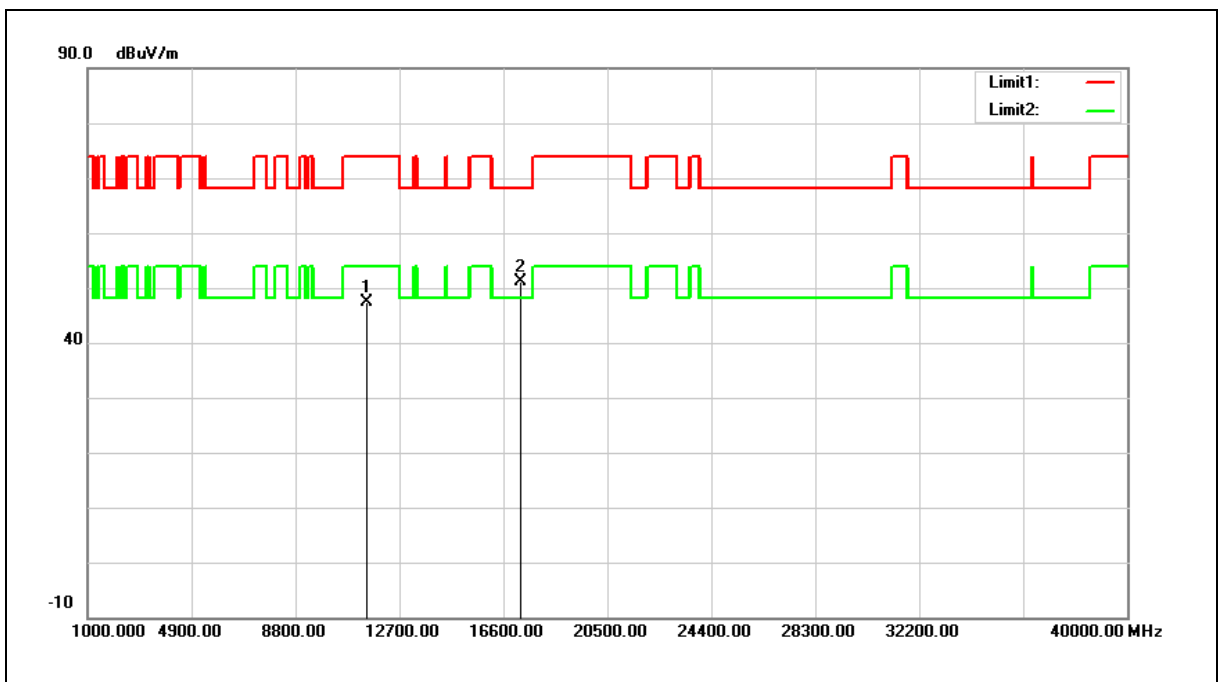


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.78	12.68	47.46	74.00	-26.54	peak
2	17235.000	32.69	18.52	51.21	68.20	-16.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

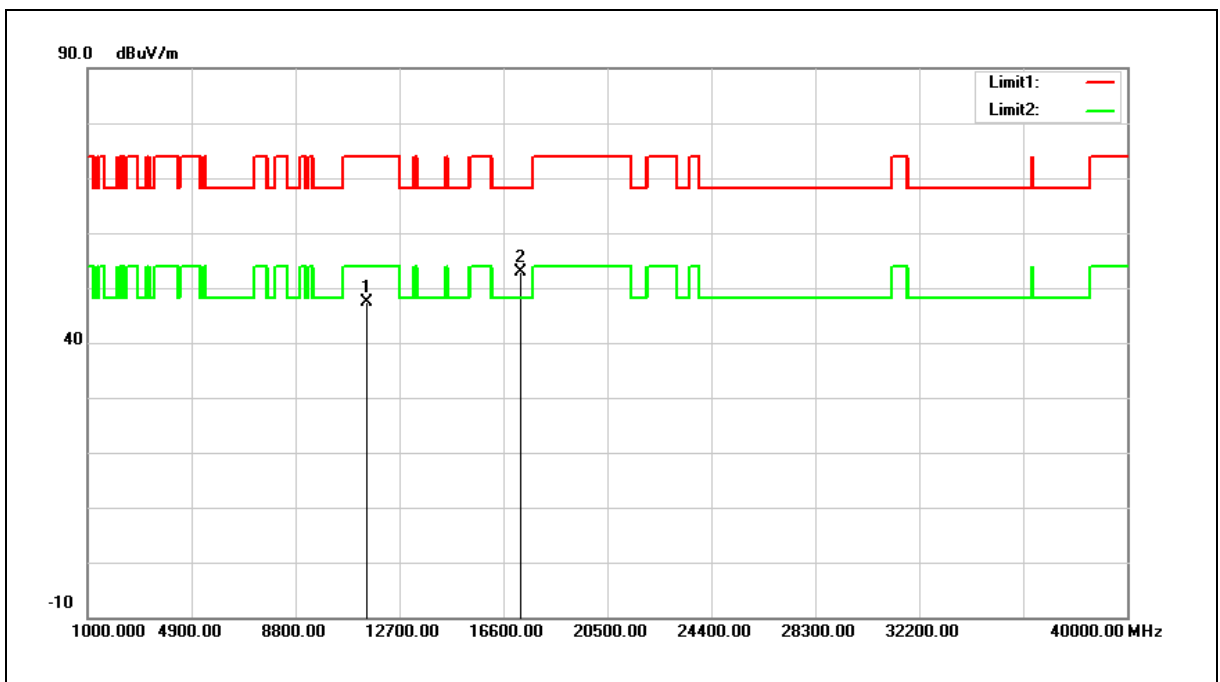


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.58	12.68	47.26	74.00	-26.74	peak
2	17235.000	34.38	18.52	52.90	68.20	-15.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

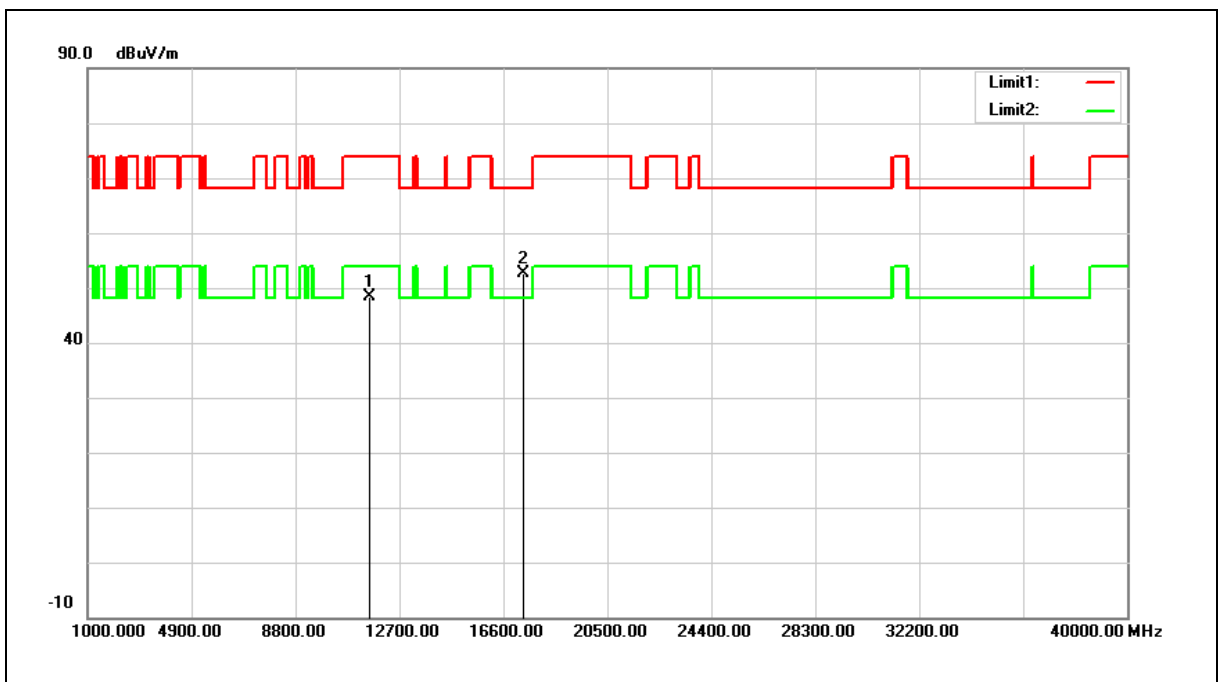


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.73	12.59	48.32	74.00	-25.68	peak
2	17355.000	33.35	19.32	52.67	68.20	-15.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

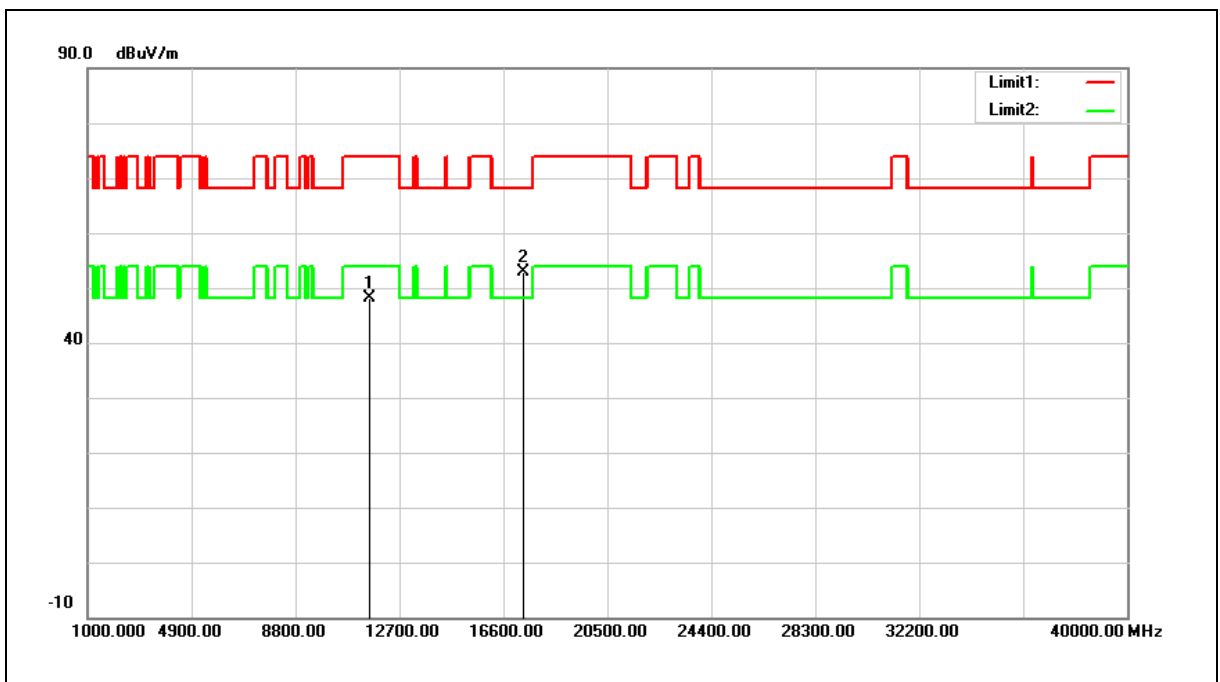


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.54	12.59	48.13	74.00	-25.87	peak
2	17355.000	33.66	19.32	52.98	68.20	-15.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

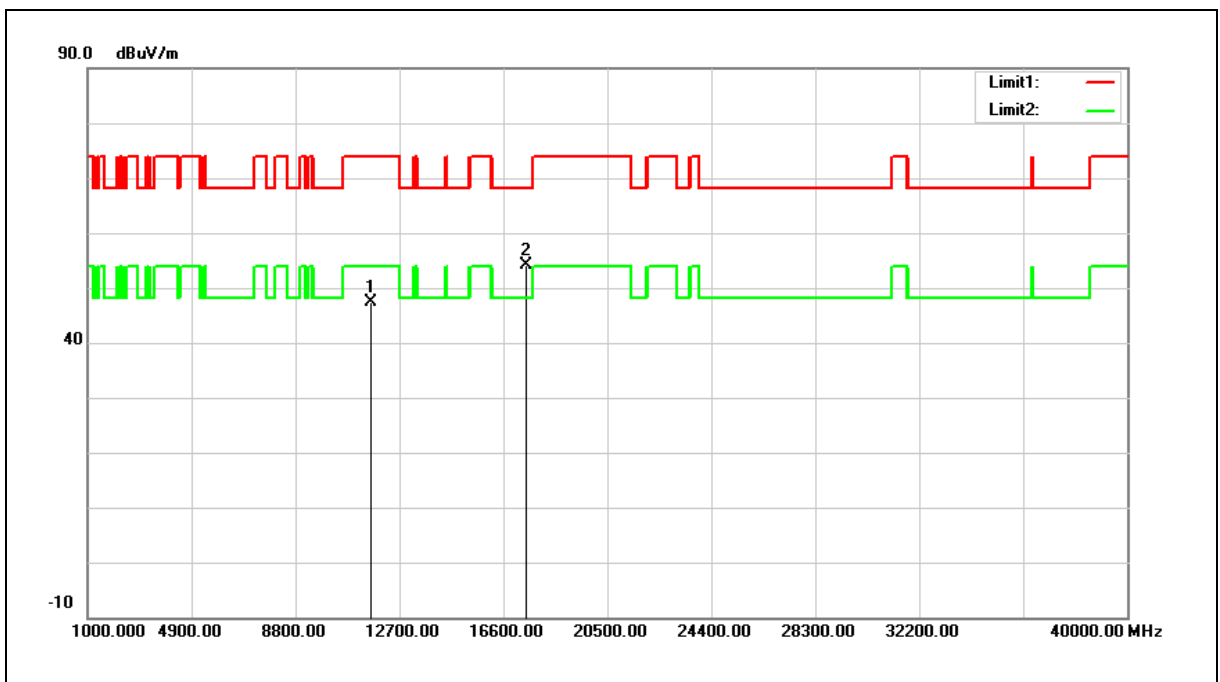


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.85	12.48	47.33	74.00	-26.67	peak
2	17475.000	33.93	20.13	54.06	68.20	-14.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

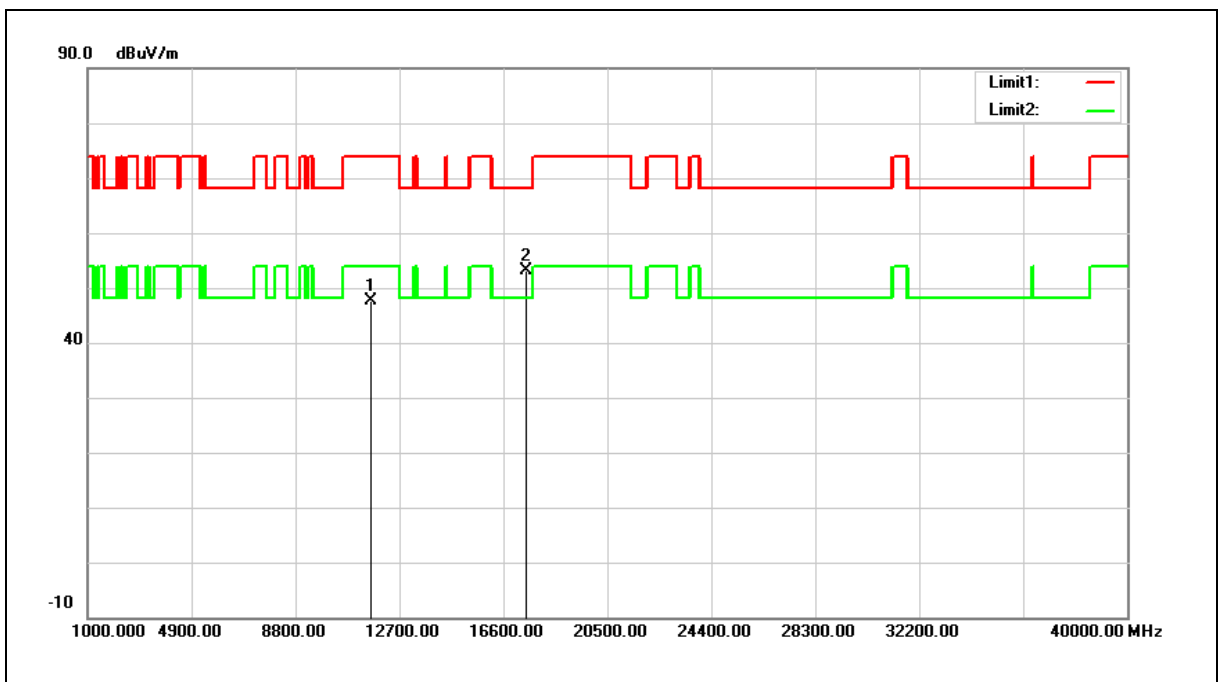


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.10	12.48	47.58	74.00	-26.42	peak
2	17475.000	32.92	20.13	53.05	68.20	-15.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

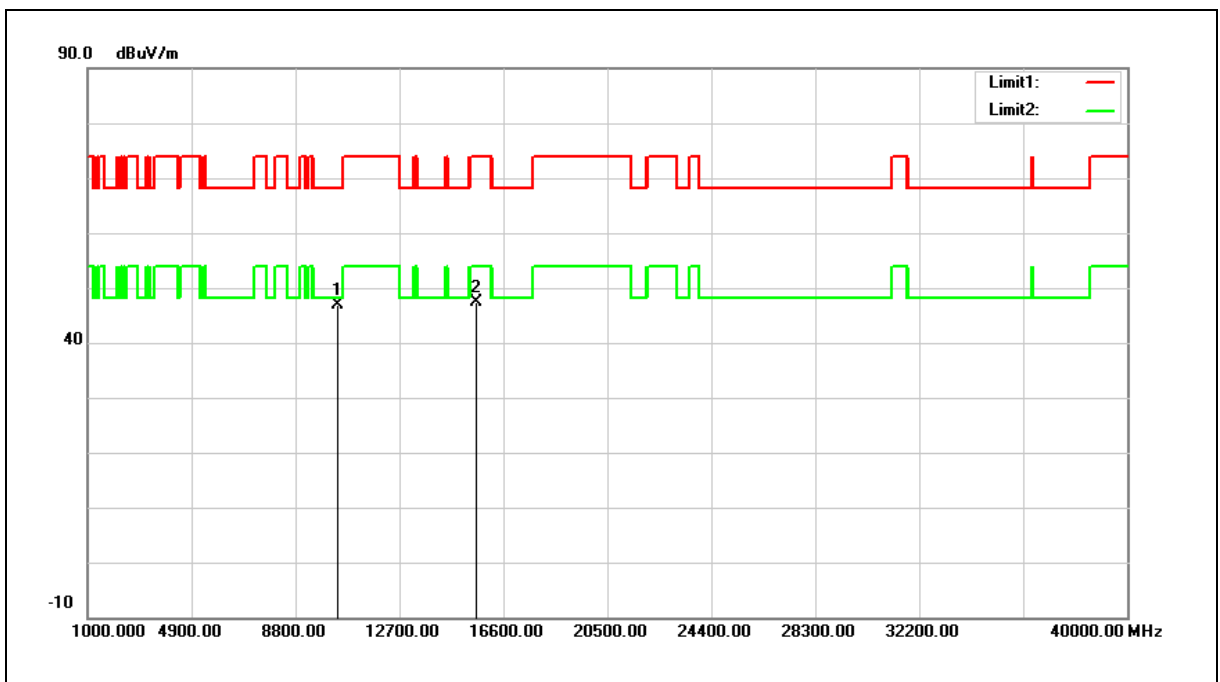


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.25	11.75	47.00	68.20	-21.20	peak
2	15570.000	32.98	14.45	47.43	74.00	-26.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

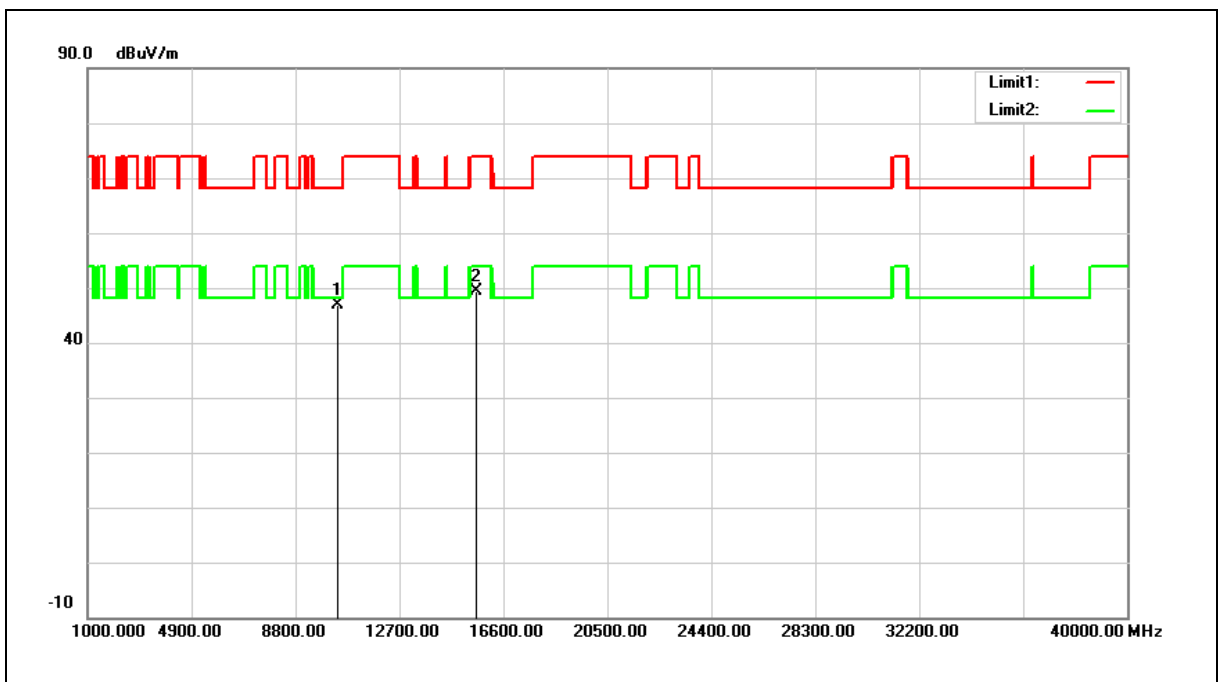


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.25	11.75	47.00	68.20	-21.20	peak
2	15570.000	35.00	14.45	49.45	74.00	-24.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

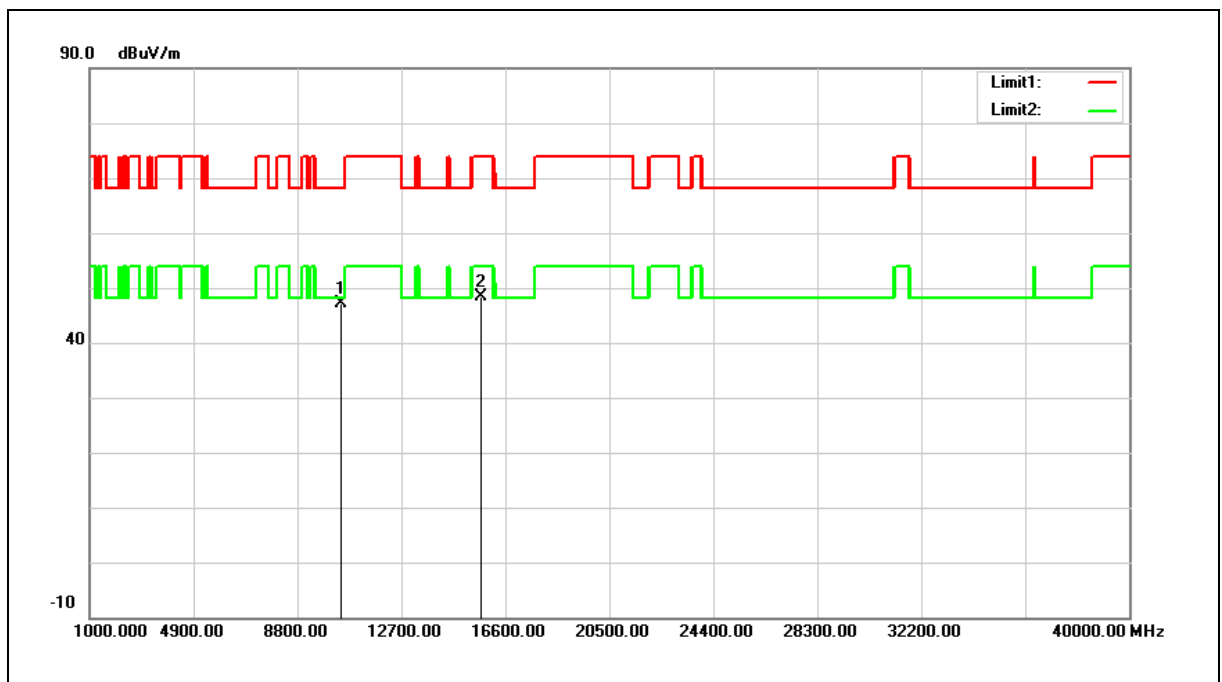


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.26	11.95	47.21	68.20	-20.99	peak
2	15690.000	34.24	14.19	48.43	74.00	-25.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

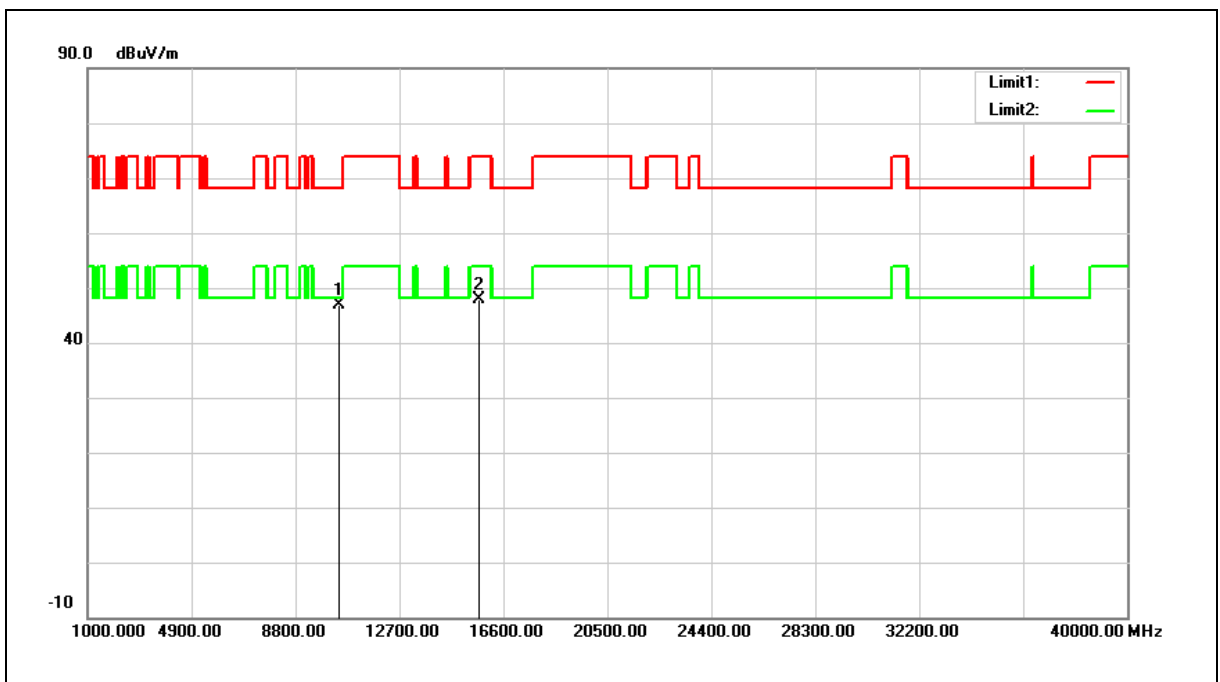


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	34.88	11.95	46.83	68.20	-21.37	peak
2	15690.000	33.70	14.19	47.89	74.00	-26.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

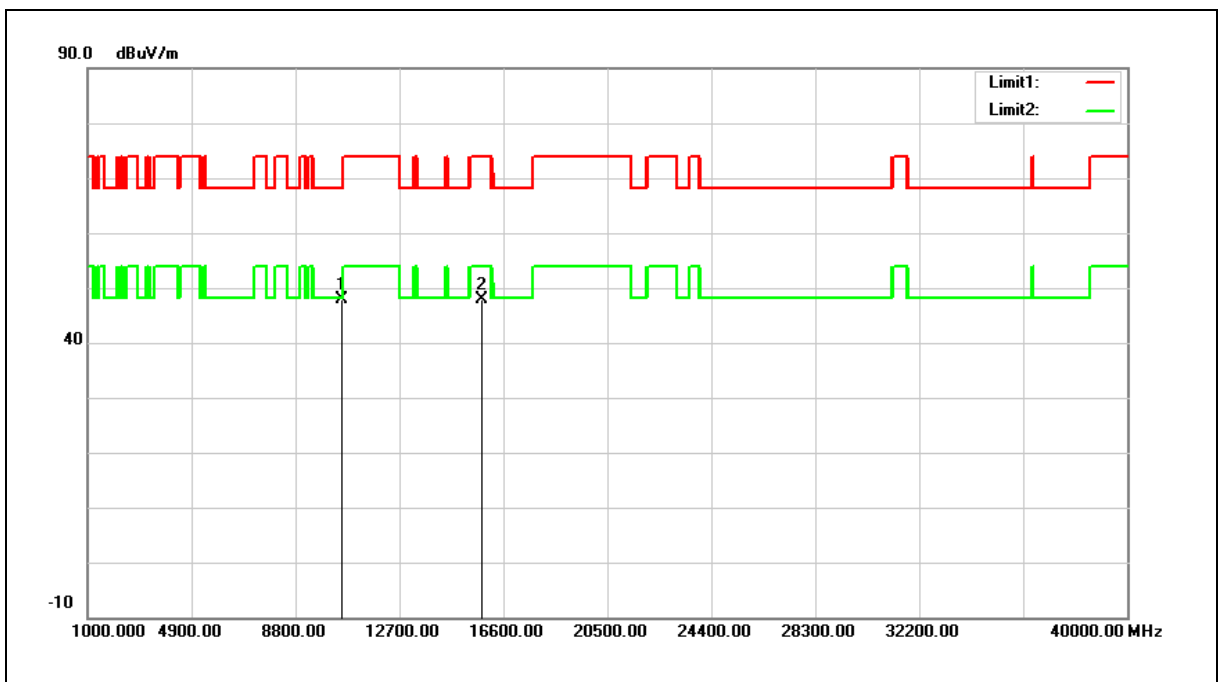


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	35.78	12.06	47.84	68.20	-20.36	peak
2	15810.000	33.94	13.96	47.90	74.00	-26.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

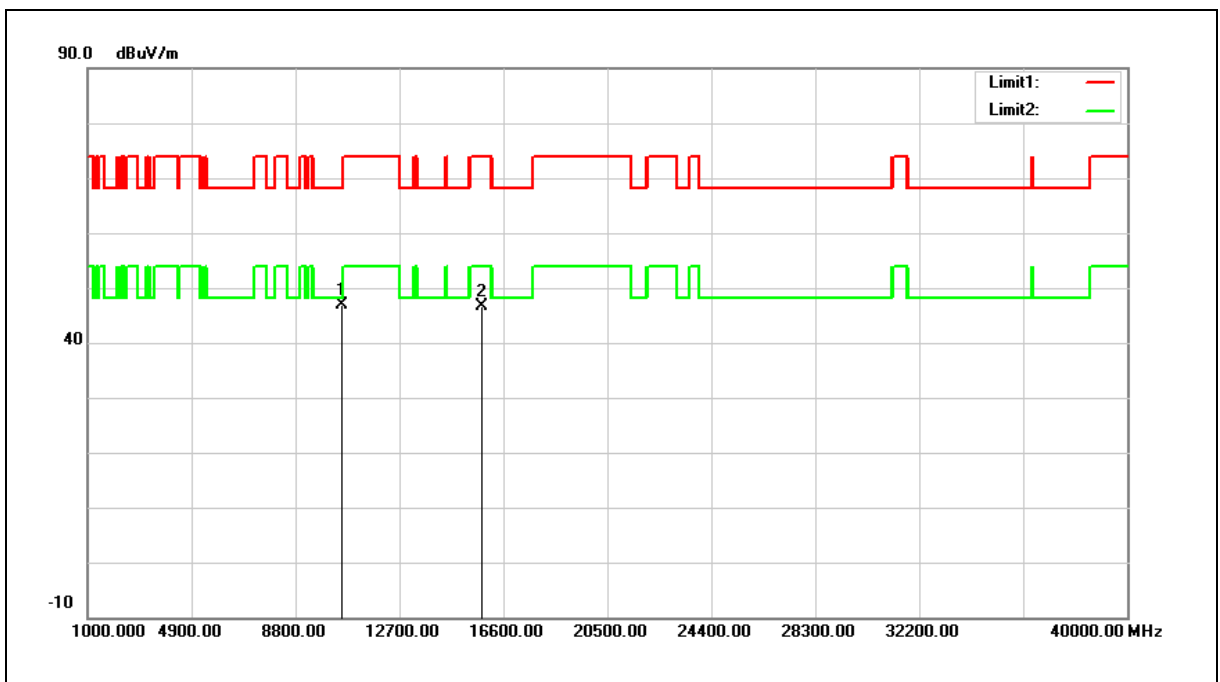


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	34.83	12.06	46.89	68.20	-21.31	peak
2	15810.000	32.59	13.96	46.55	74.00	-27.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

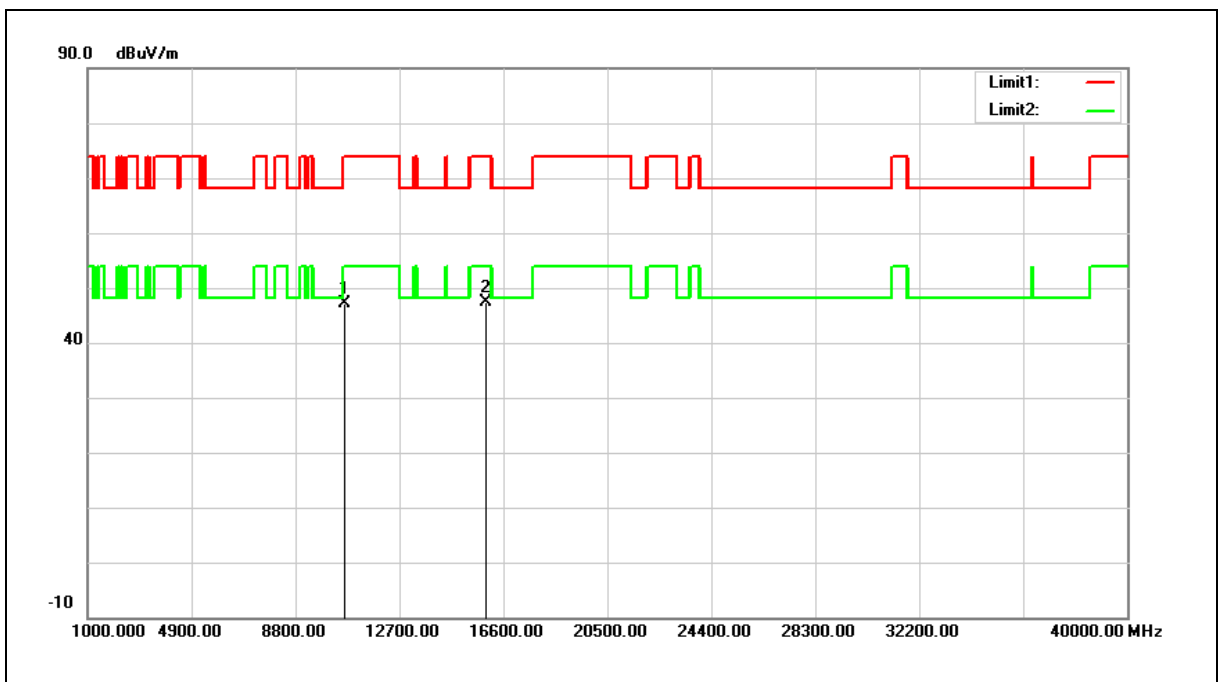


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.04	12.12	47.16	74.00	-26.84	peak
2	15930.000	33.57	13.70	47.27	74.00	-26.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

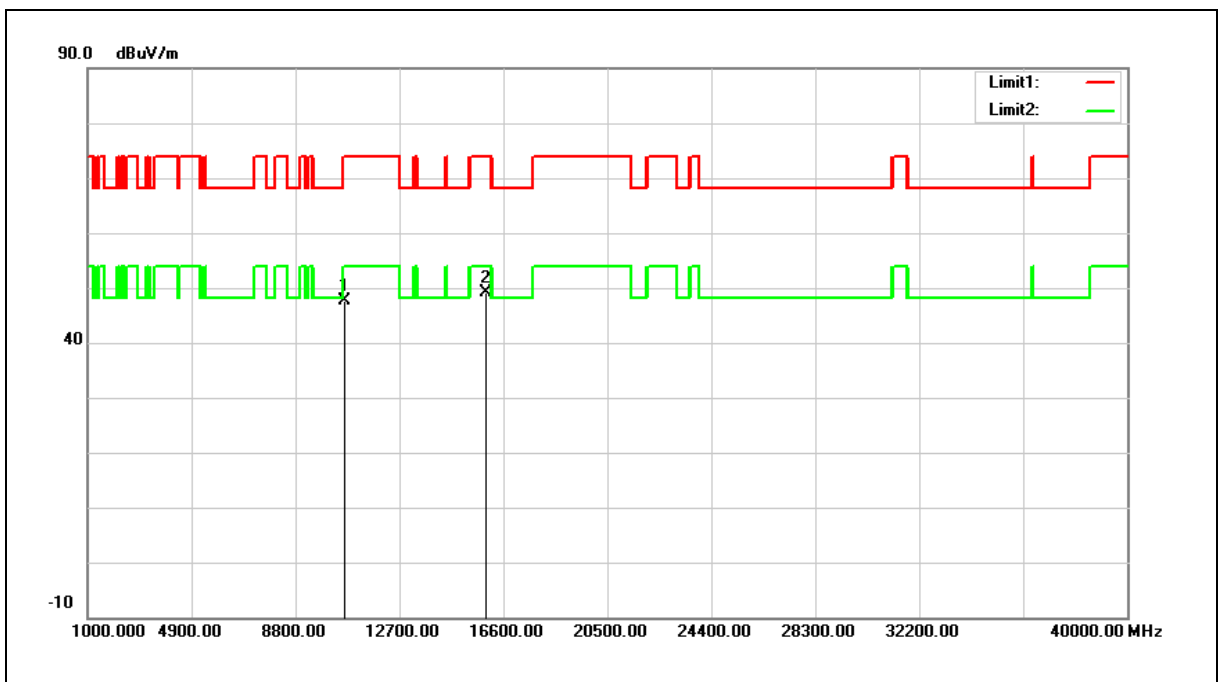


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.58	12.12	47.70	74.00	-26.30	peak
2	15930.000	35.37	13.70	49.07	74.00	-24.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

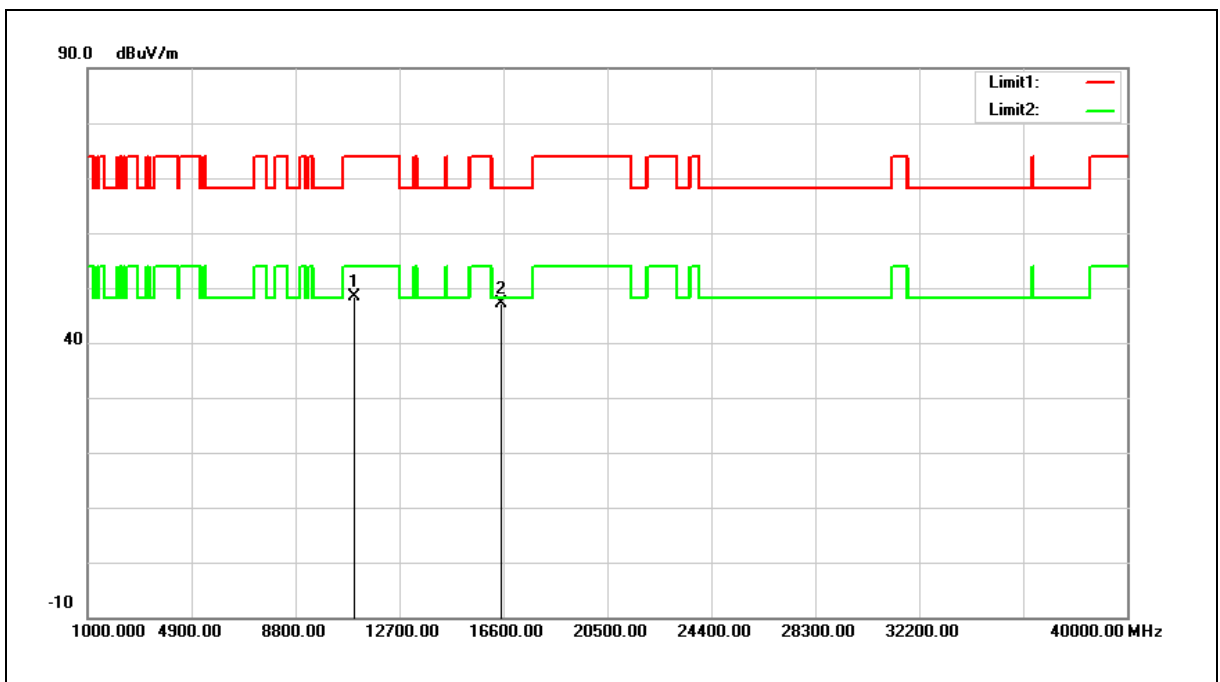


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.90	12.40	48.30	74.00	-25.70	peak
2	16530.000	32.78	14.41	47.19	68.20	-21.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

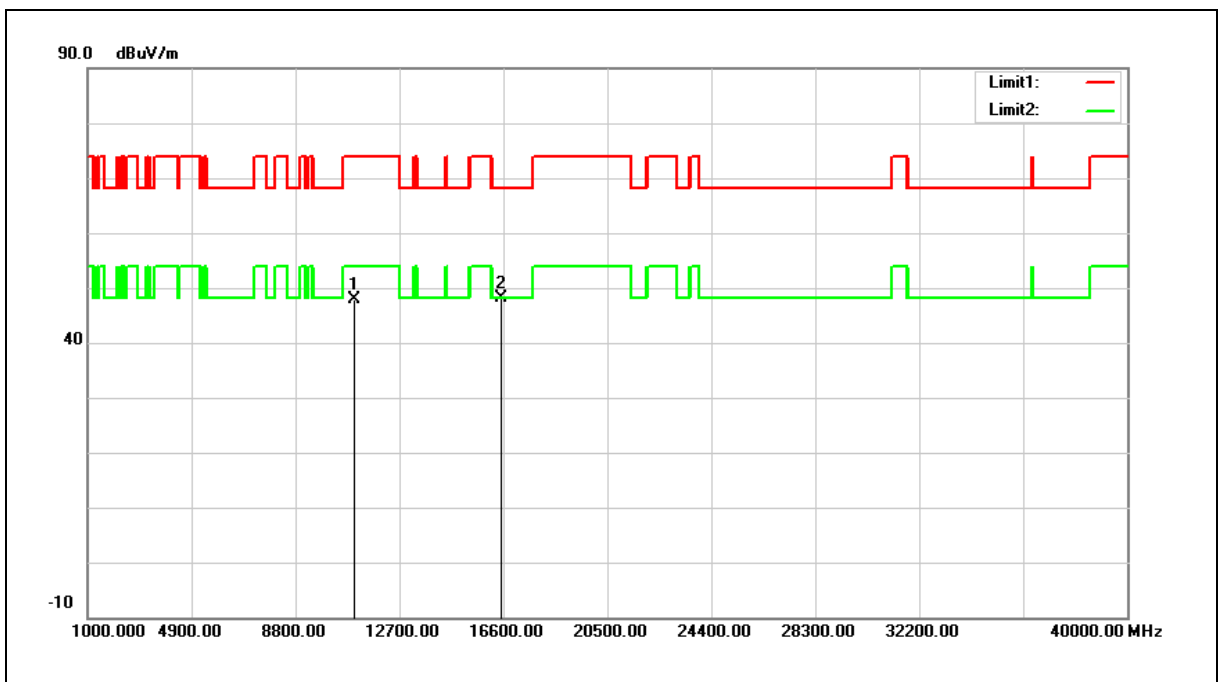


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.52	12.40	47.92	74.00	-26.08	peak
2	16530.000	33.80	14.41	48.21	68.20	-19.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

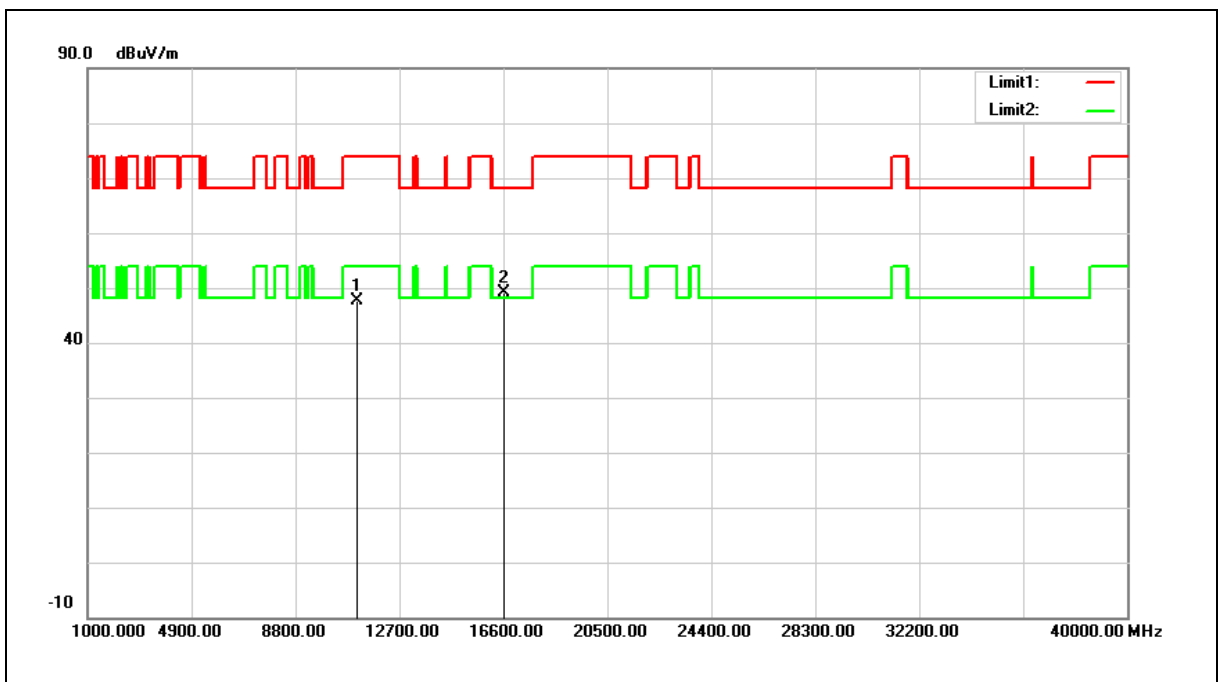


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.14	12.45	47.59	74.00	-26.41	peak
2	16650.000	33.99	15.06	49.05	68.20	-19.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

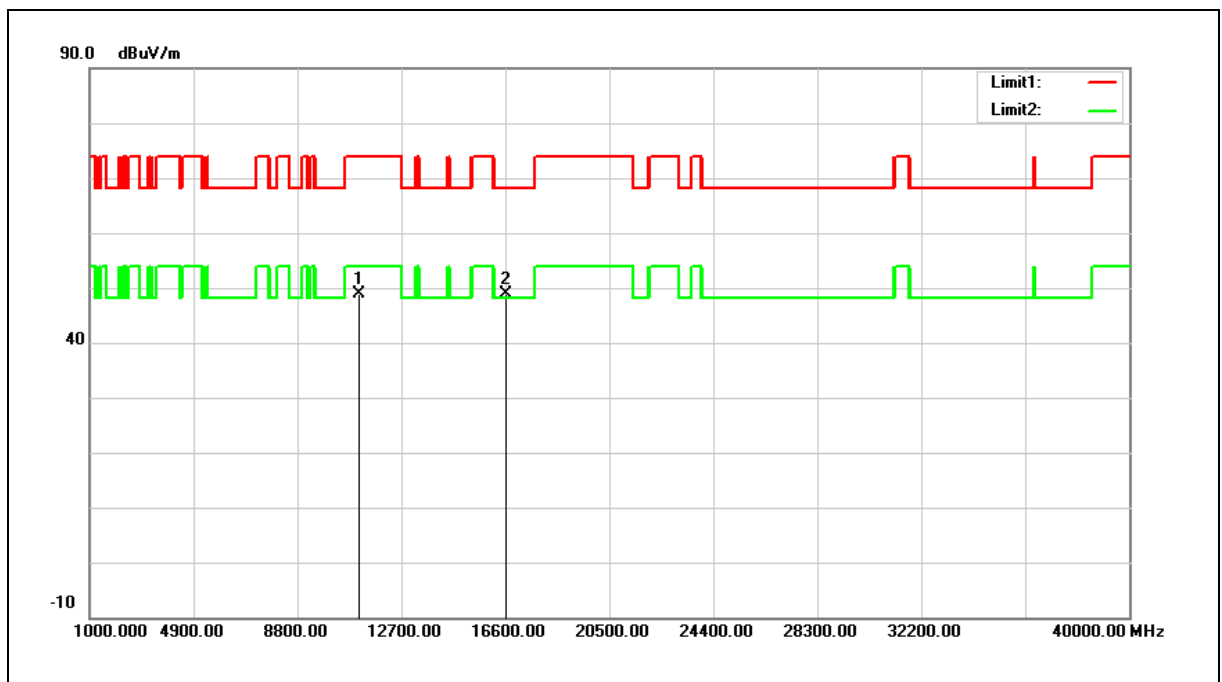


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	36.46	12.45	48.91	74.00	-25.09	peak
2	16650.000	33.71	15.06	48.77	68.20	-19.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

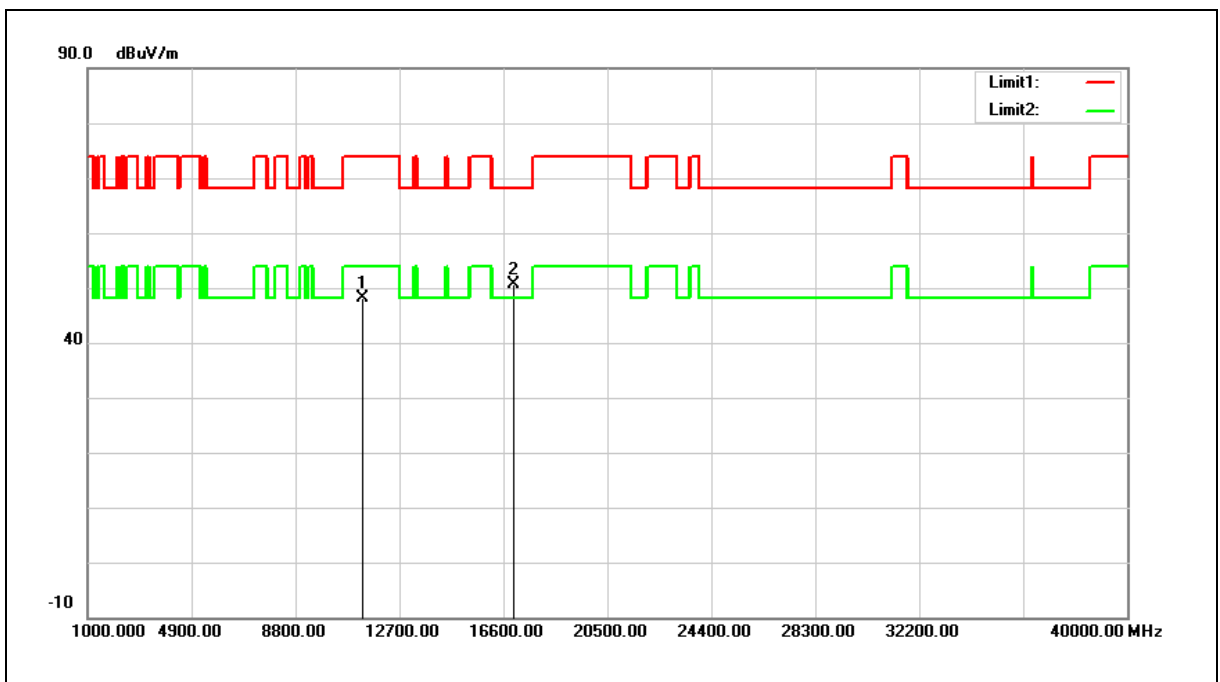


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.50	12.59	48.09	74.00	-25.91	peak
2	17010.000	33.49	17.02	50.51	68.20	-17.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

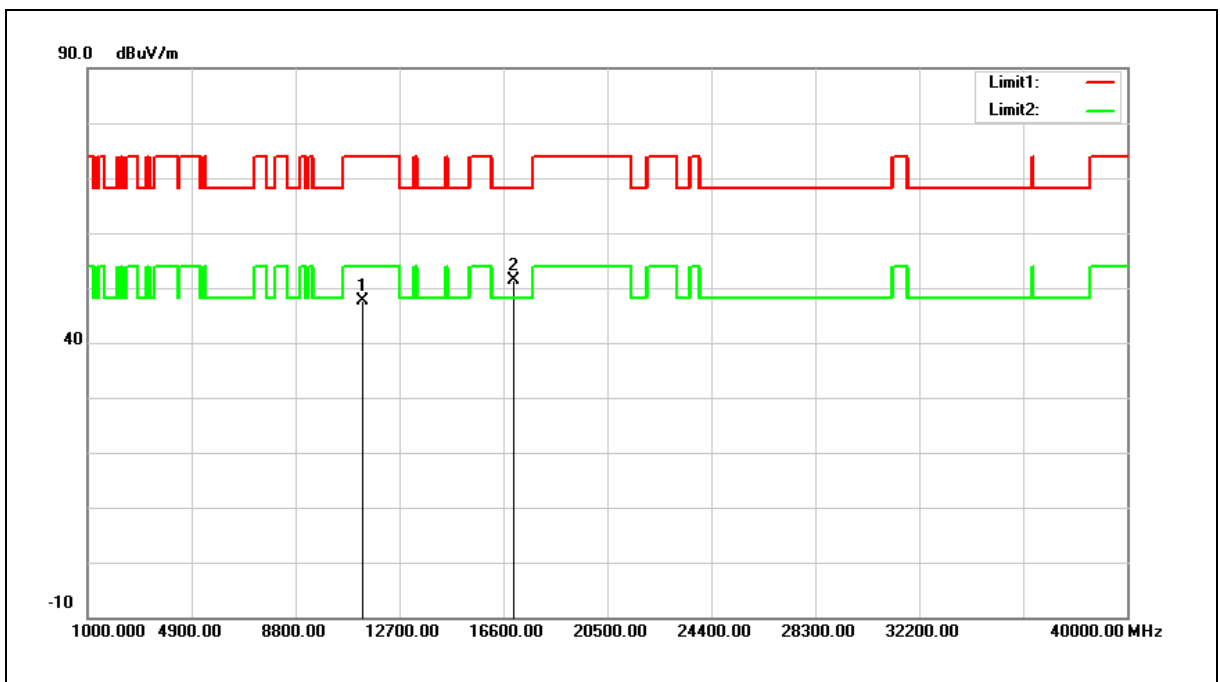


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.07	12.59	47.66	74.00	-26.34	peak
2	17010.000	34.25	17.02	51.27	68.20	-16.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

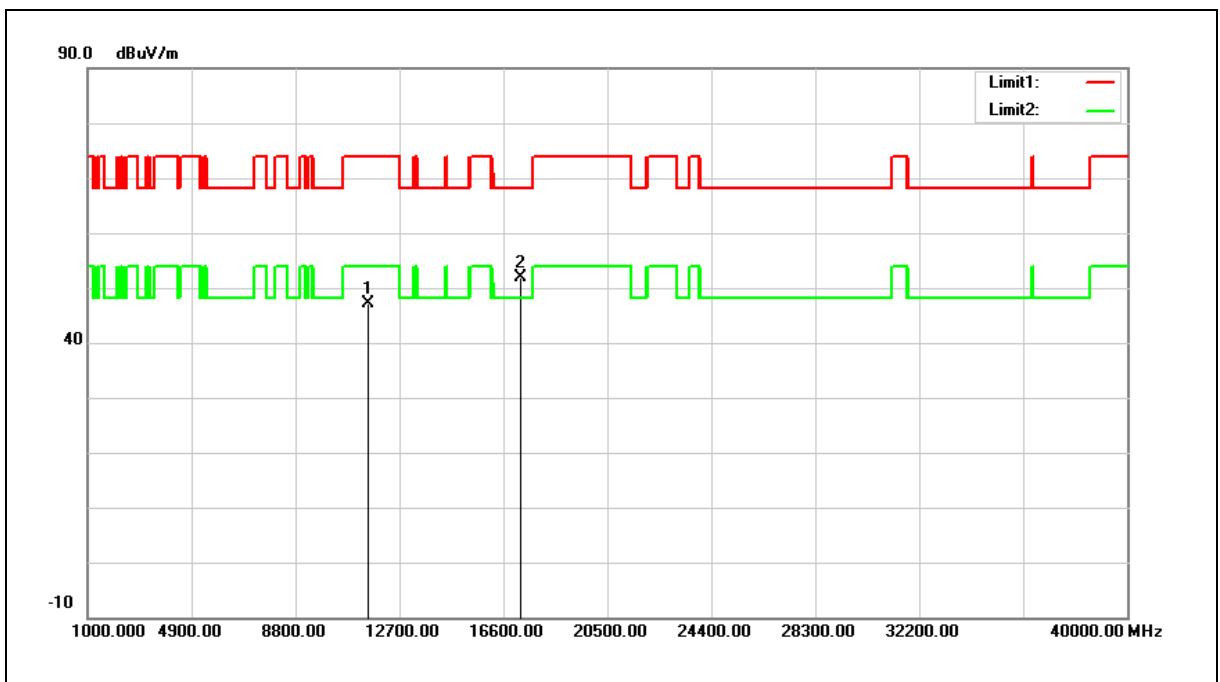


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.48	12.68	47.16	74.00	-26.84	peak
2	17265.000	33.06	18.72	51.78	68.20	-16.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

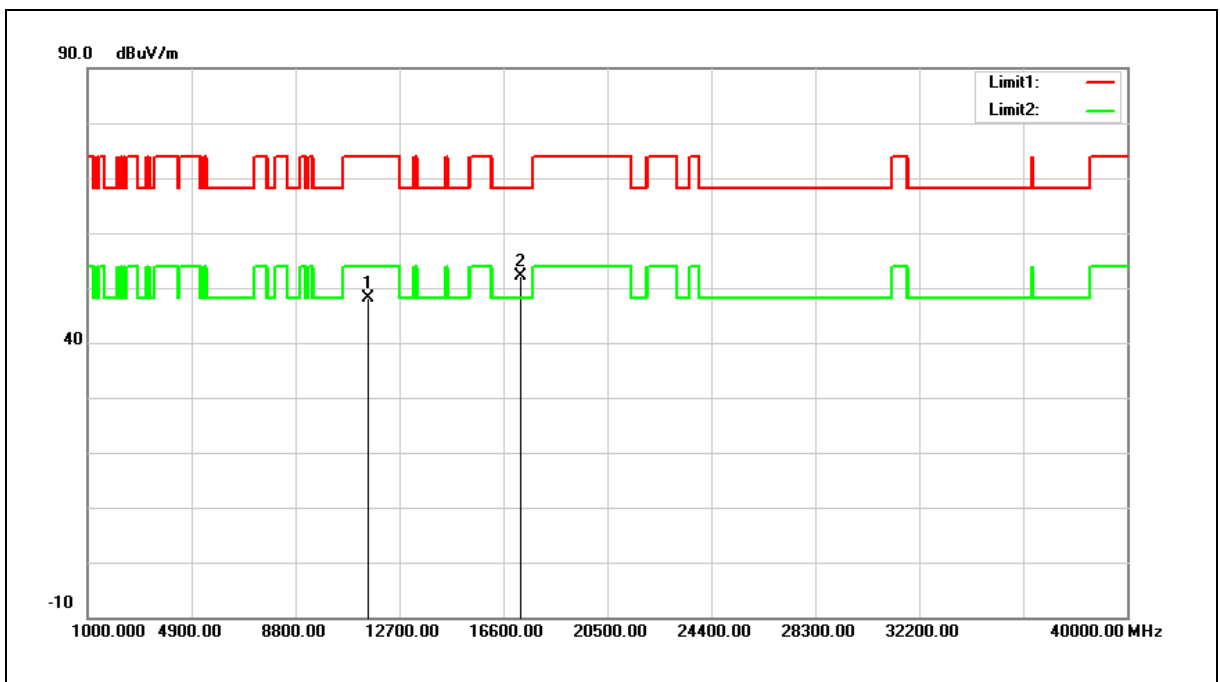


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.40	12.68	48.08	74.00	-25.92	peak
2	17265.000	33.46	18.72	52.18	68.20	-16.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

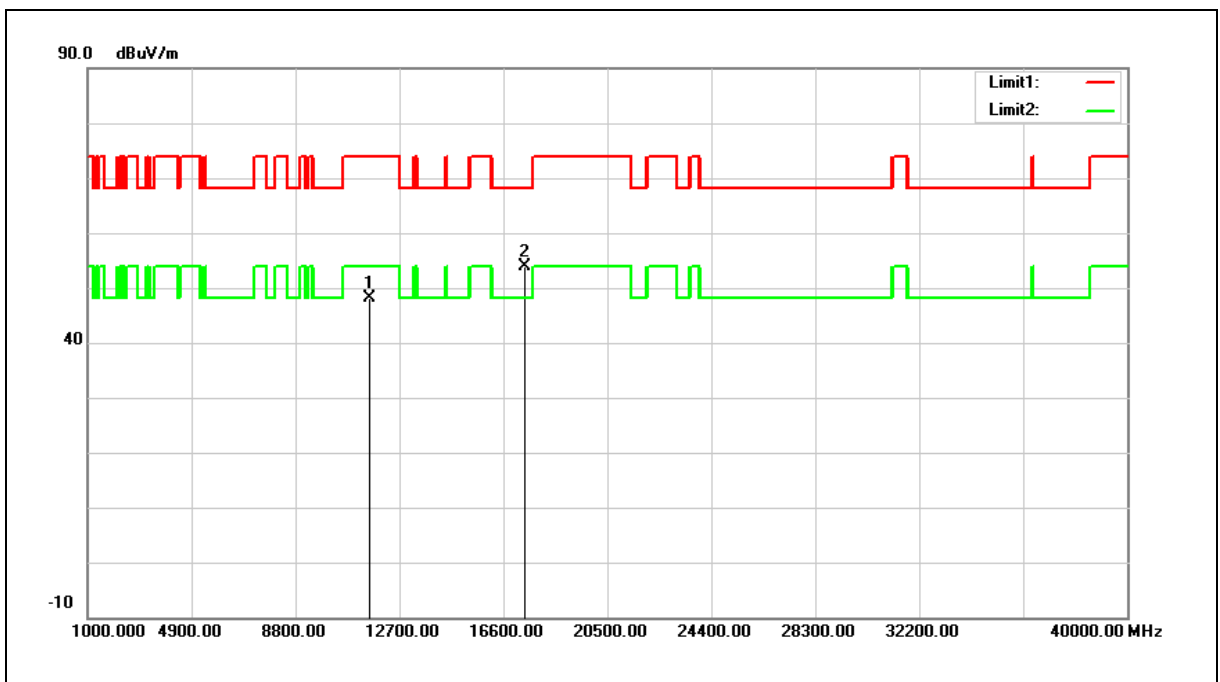


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.55	12.56	48.11	74.00	-25.89	peak
2	17385.000	34.29	19.52	53.81	68.20	-14.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

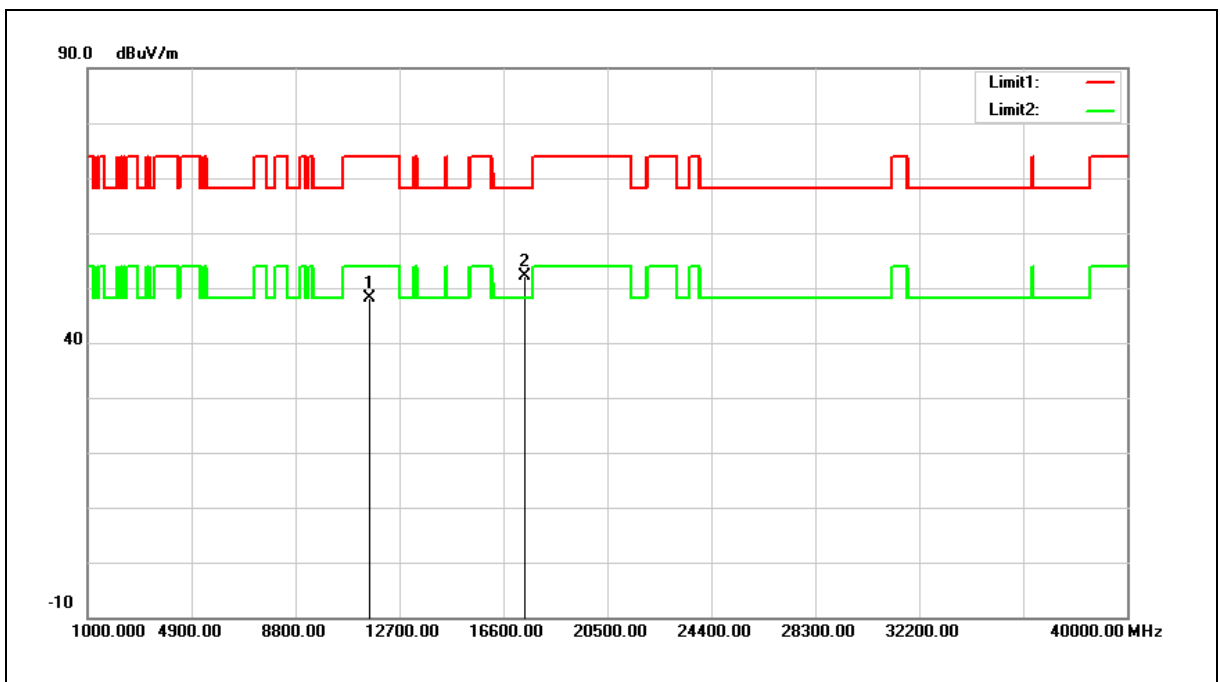


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.62	12.56	48.18	74.00	-25.82	peak
2	17385.000	32.66	19.52	52.18	68.20	-16.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

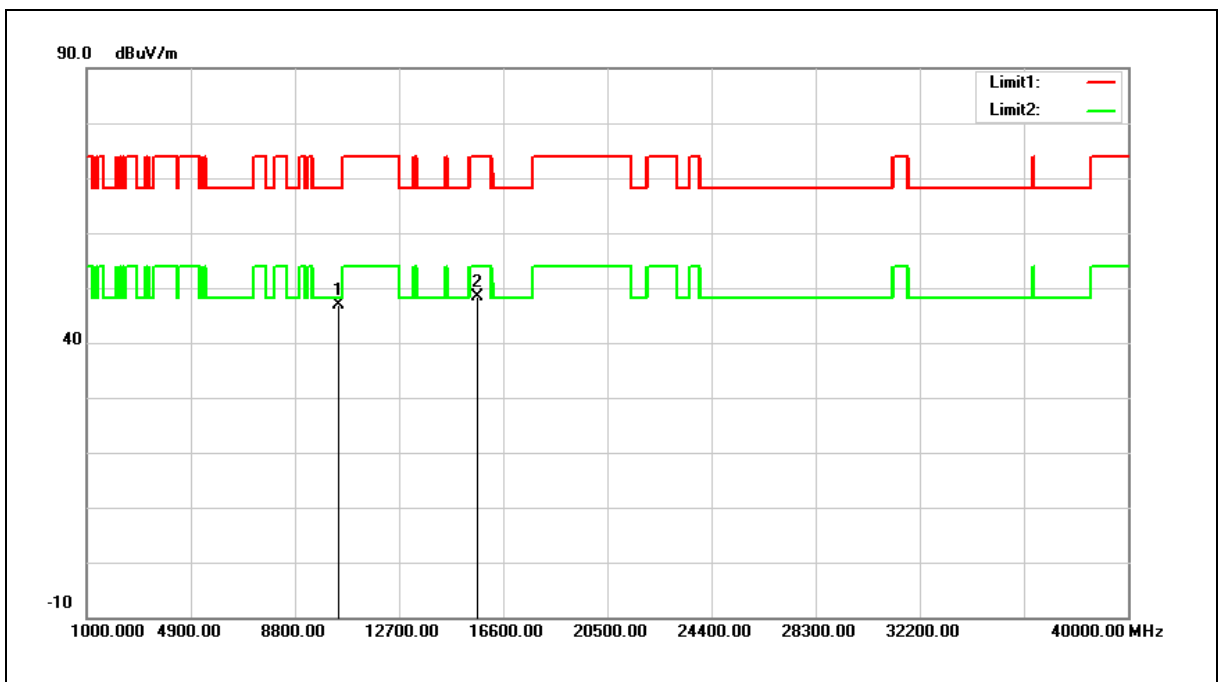


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	34.92	11.85	46.77	68.20	-21.43	peak
2	15630.000	33.96	14.33	48.29	74.00	-25.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

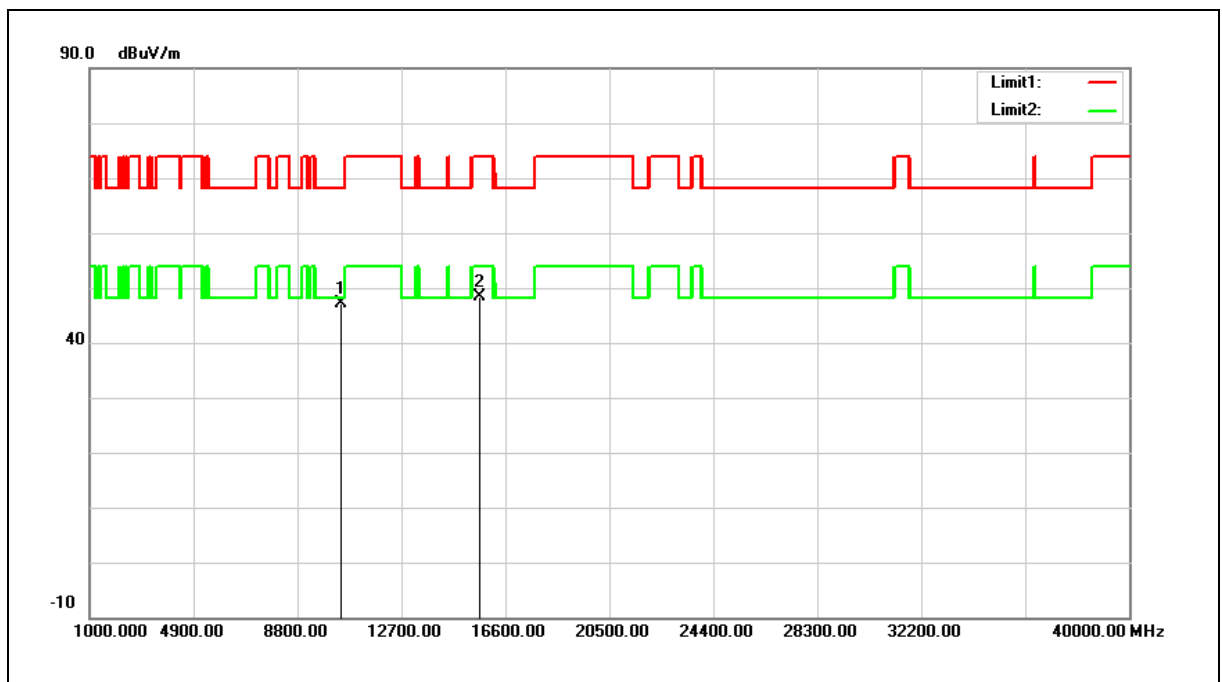


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	35.34	11.85	47.19	68.20	-21.01	peak
2	15630.000	34.08	14.33	48.41	74.00	-25.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

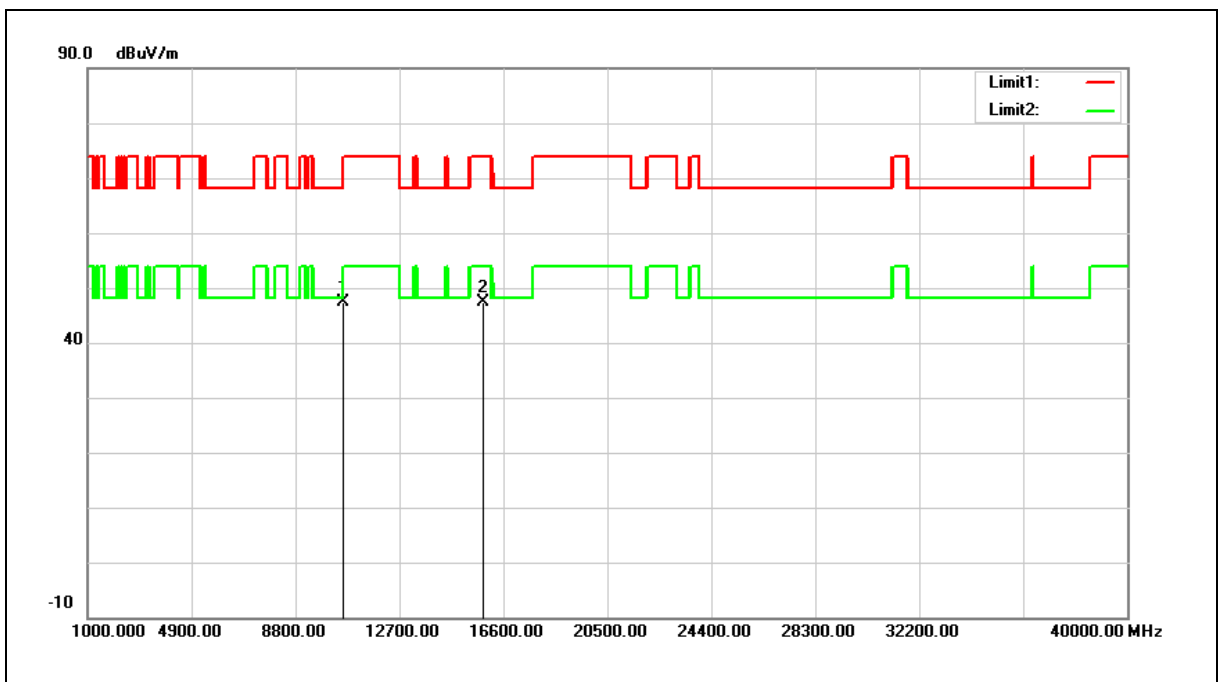


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	35.25	12.10	47.35	68.20	-20.85	peak
2	15870.000	33.62	13.82	47.44	74.00	-26.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

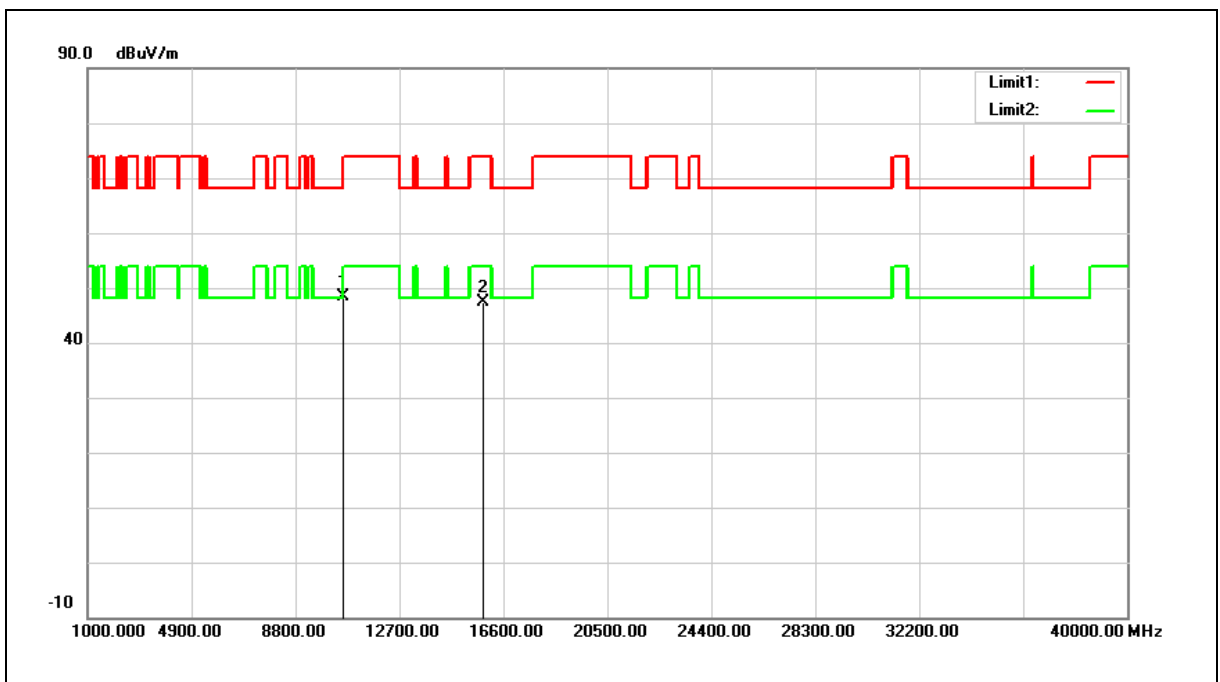


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	36.29	12.10	48.39	68.20	-19.81	peak
2	15870.000	33.50	13.82	47.32	74.00	-26.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

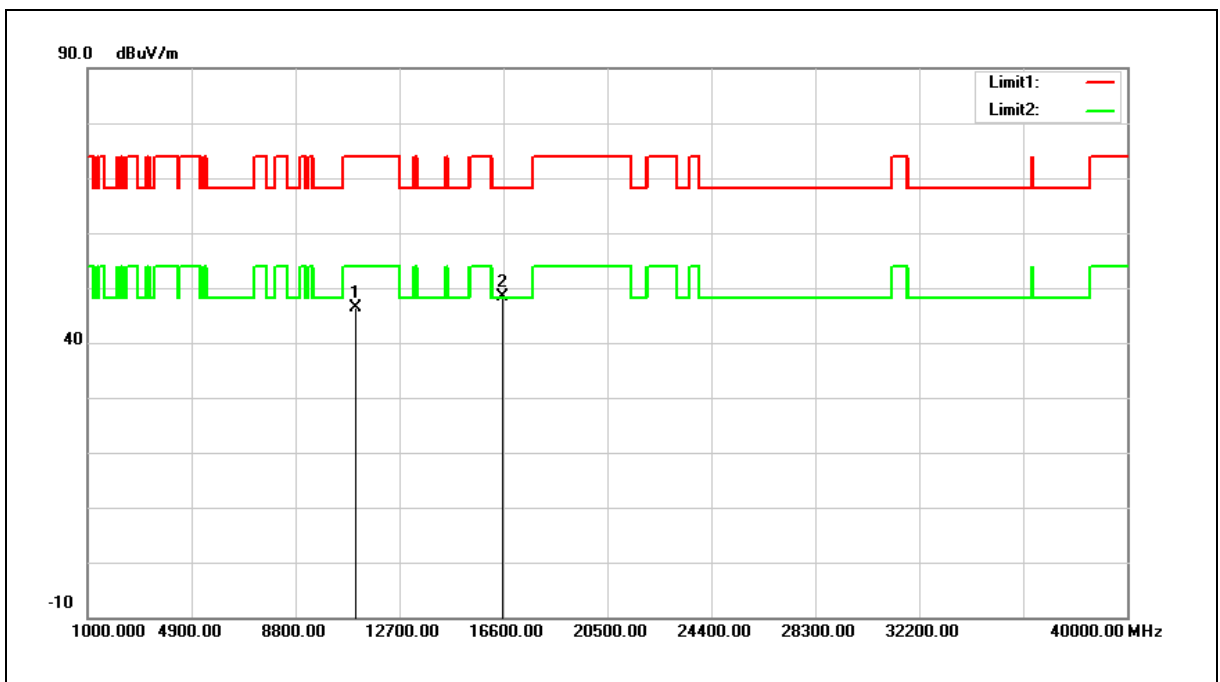


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.95	12.43	46.38	74.00	-27.62	peak
2	16590.000	33.69	14.73	48.42	68.20	-19.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

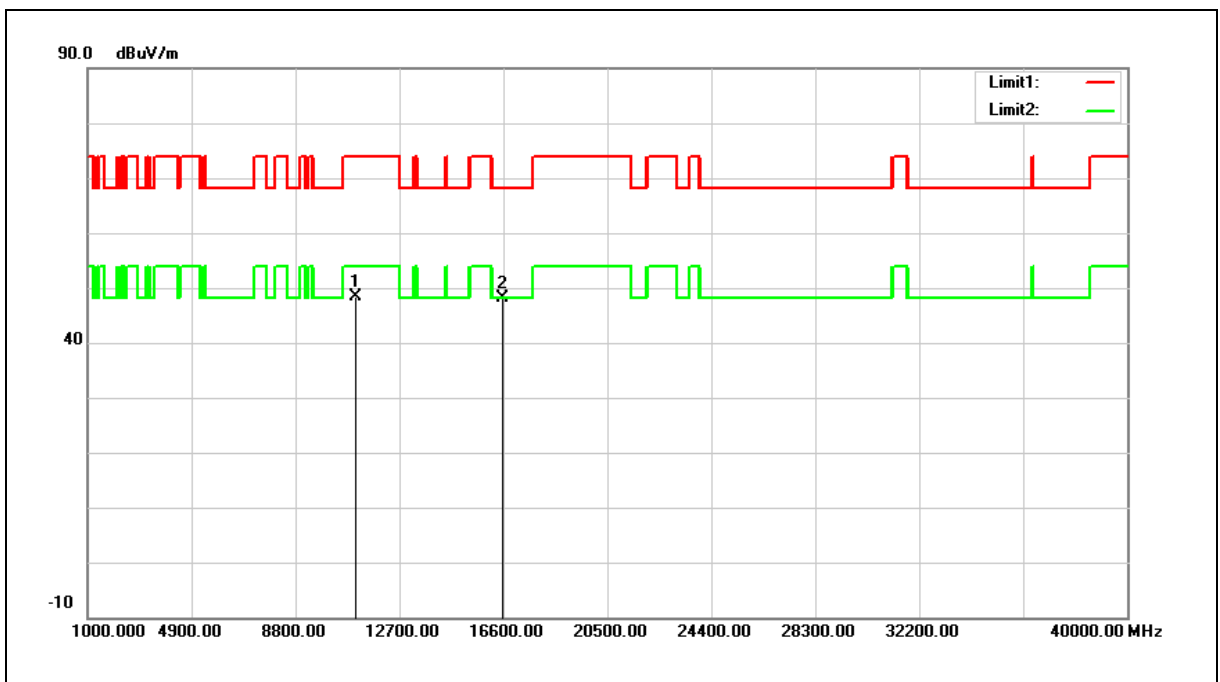


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	35.90	12.43	48.33	74.00	-25.67	peak
2	16590.000	33.28	14.73	48.01	68.20	-20.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

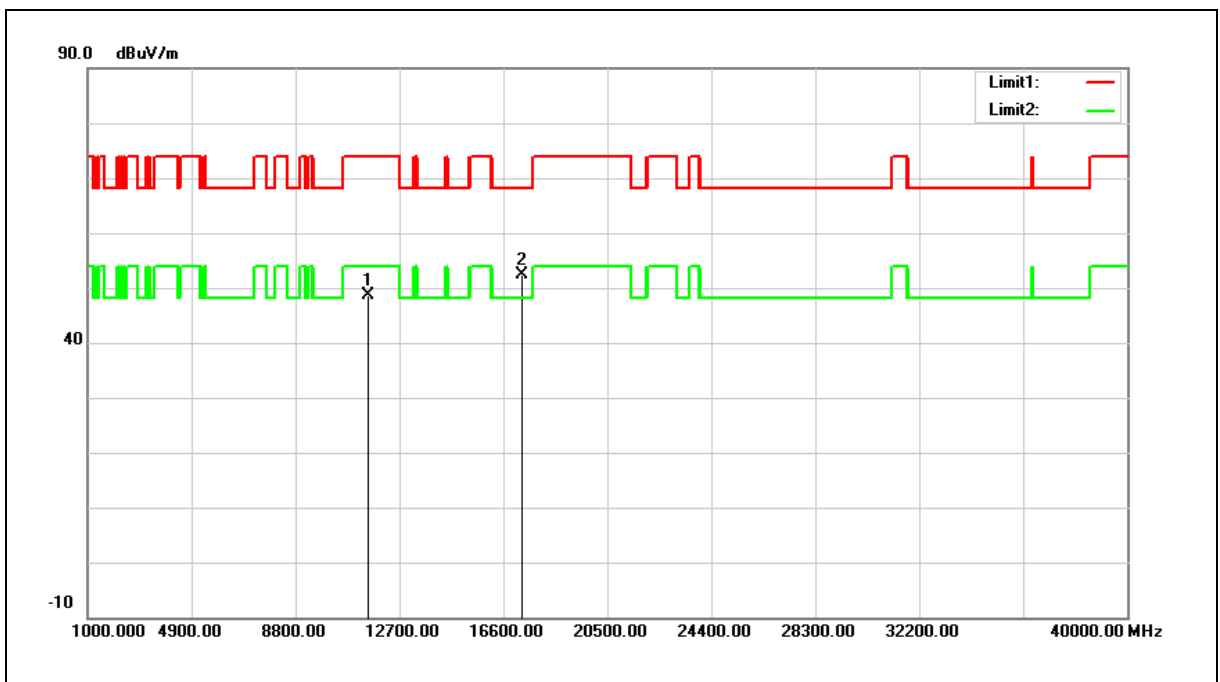


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.94	12.62	48.56	74.00	-25.44	peak
2	17325.000	33.34	19.12	52.46	68.20	-15.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

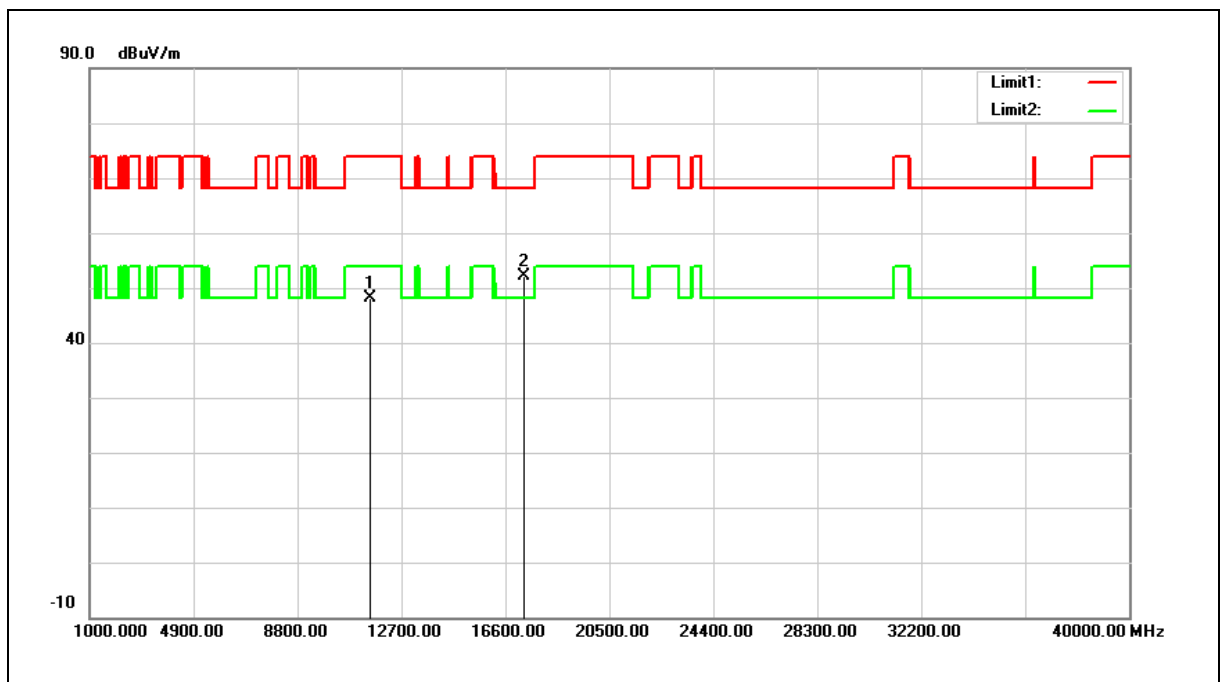


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.61	12.62	48.23	74.00	-25.77	peak
2	17325.000	33.10	19.12	52.22	68.20	-15.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

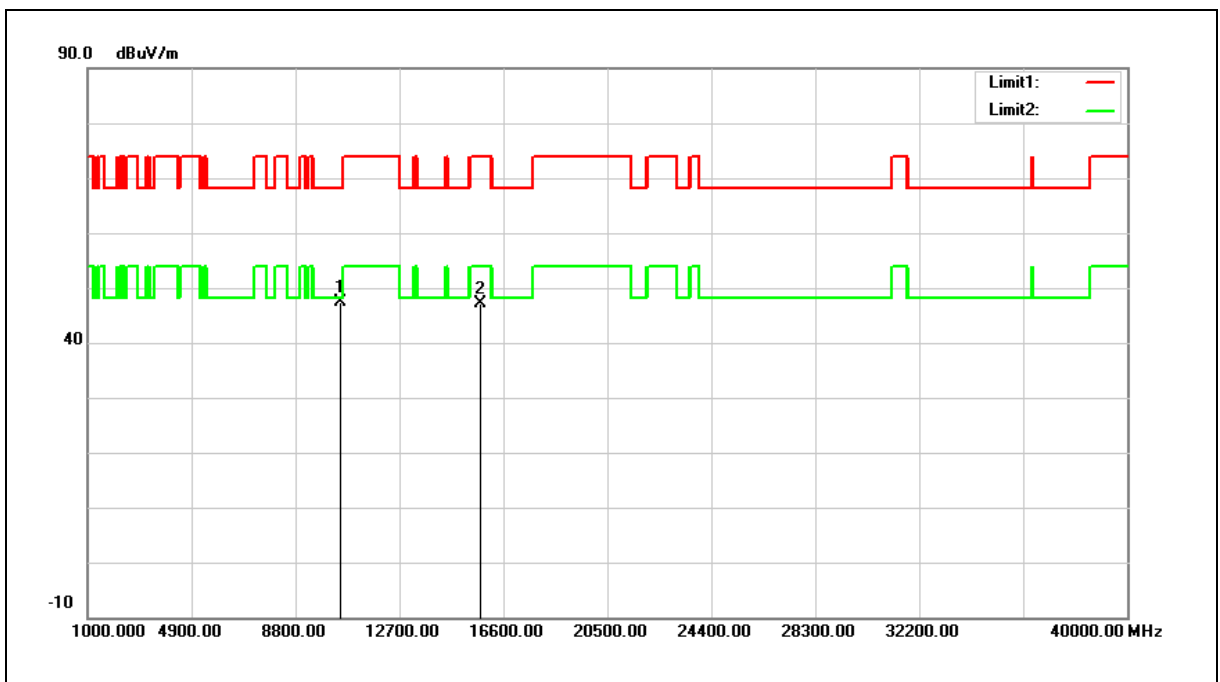


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	35.21	12.05	47.26	68.20	-20.94	peak
2	15750.000	33.05	14.08	47.13	74.00	-26.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

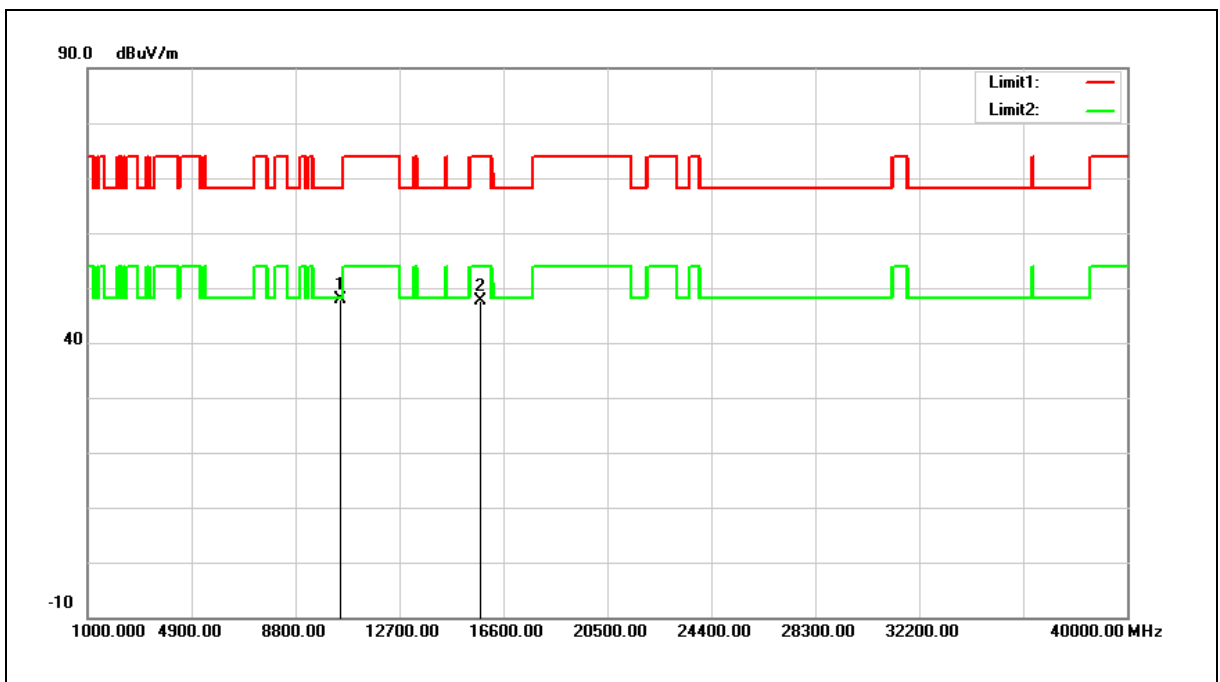


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	35.71	12.05	47.76	68.20	-20.44	peak
2	15750.000	33.51	14.08	47.59	74.00	-26.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

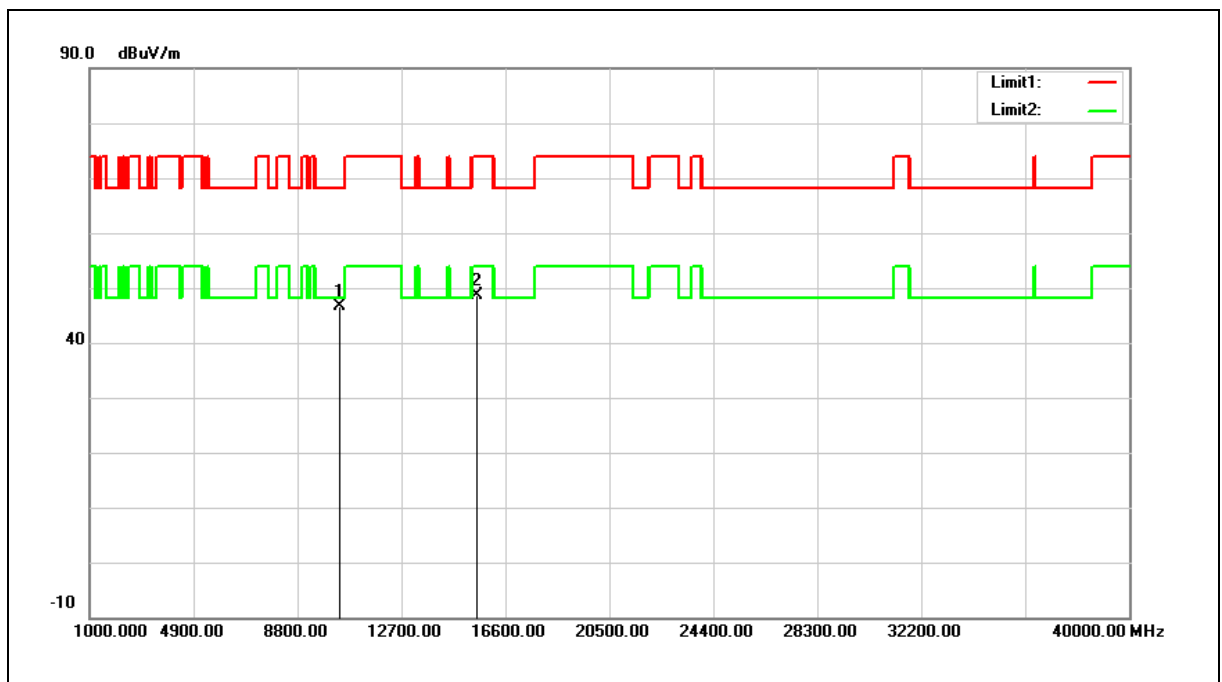


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.90	11.69	46.59	68.20	-21.61	peak
2	15540.000	34.00	14.52	48.52	74.00	-25.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

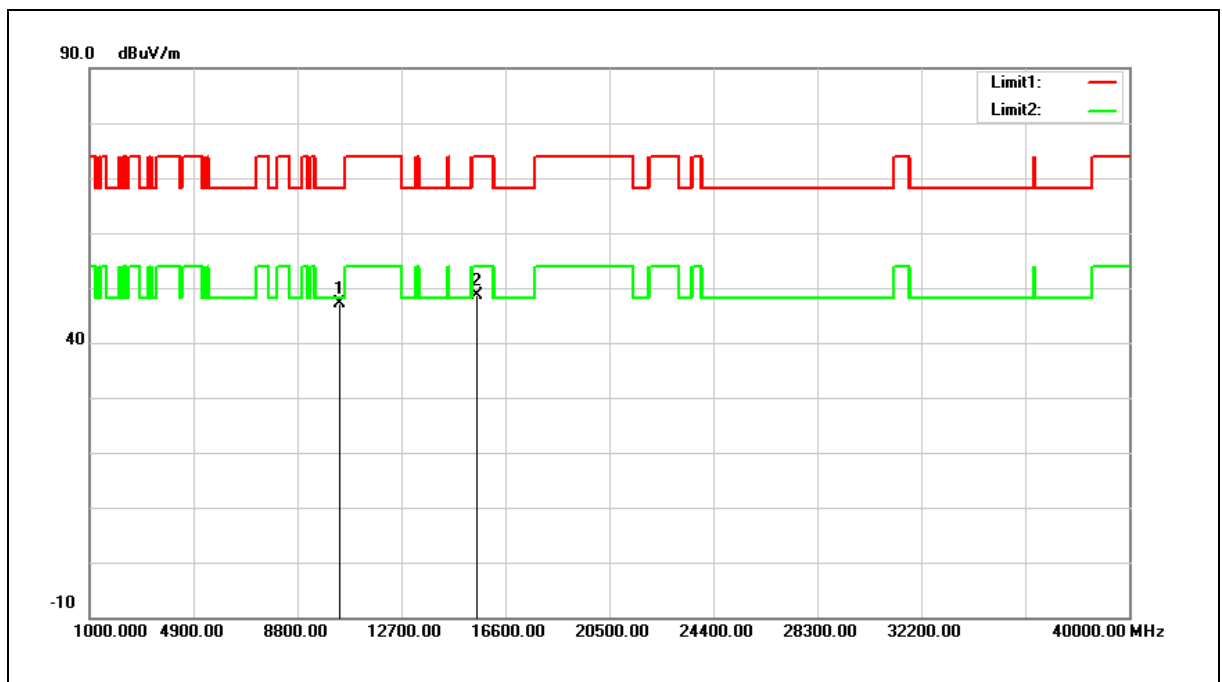


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.36	11.69	47.05	68.20	-21.15	peak
2	15540.000	34.14	14.52	48.66	74.00	-25.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

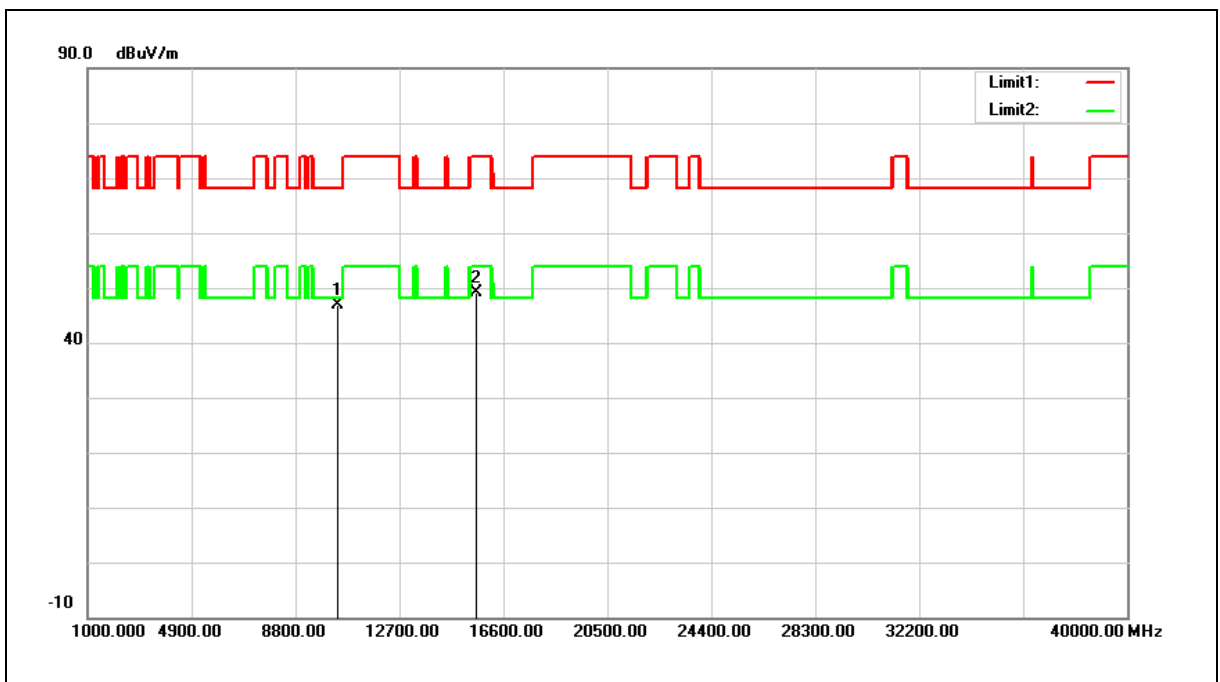


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.18	11.79	46.97	68.20	-21.23	peak
2	15600.000	34.69	14.39	49.08	74.00	-24.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

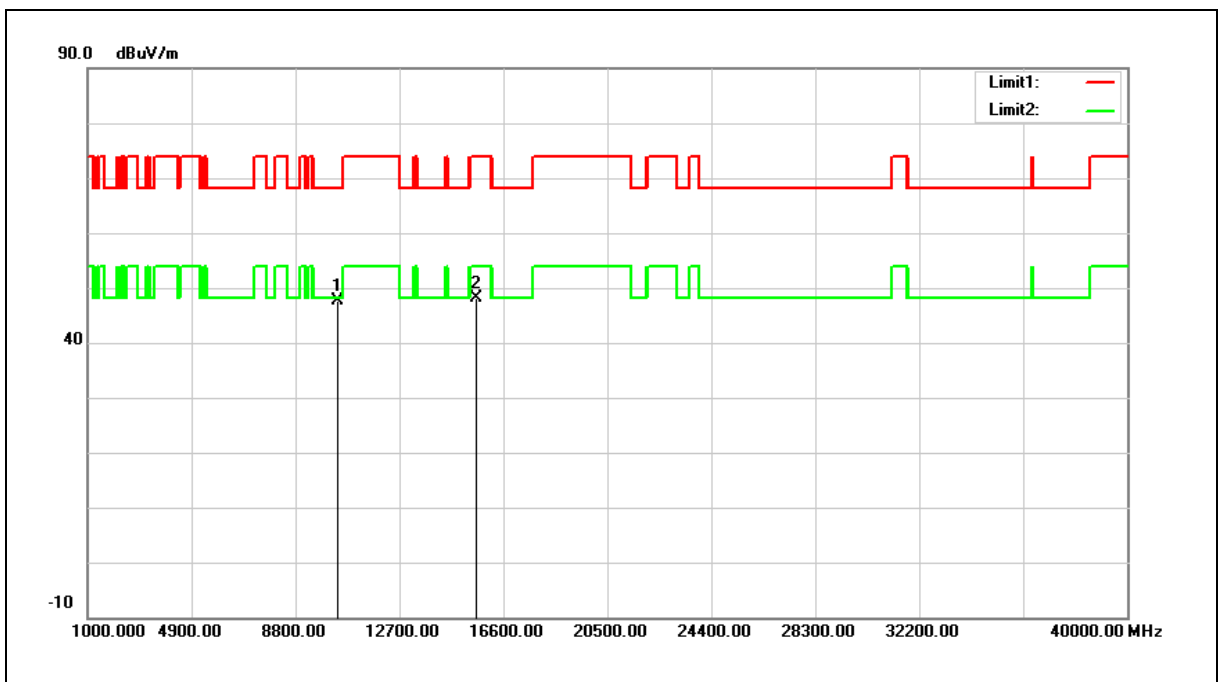


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.81	11.79	47.60	68.20	-20.60	peak
2	15600.000	33.86	14.39	48.25	74.00	-25.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

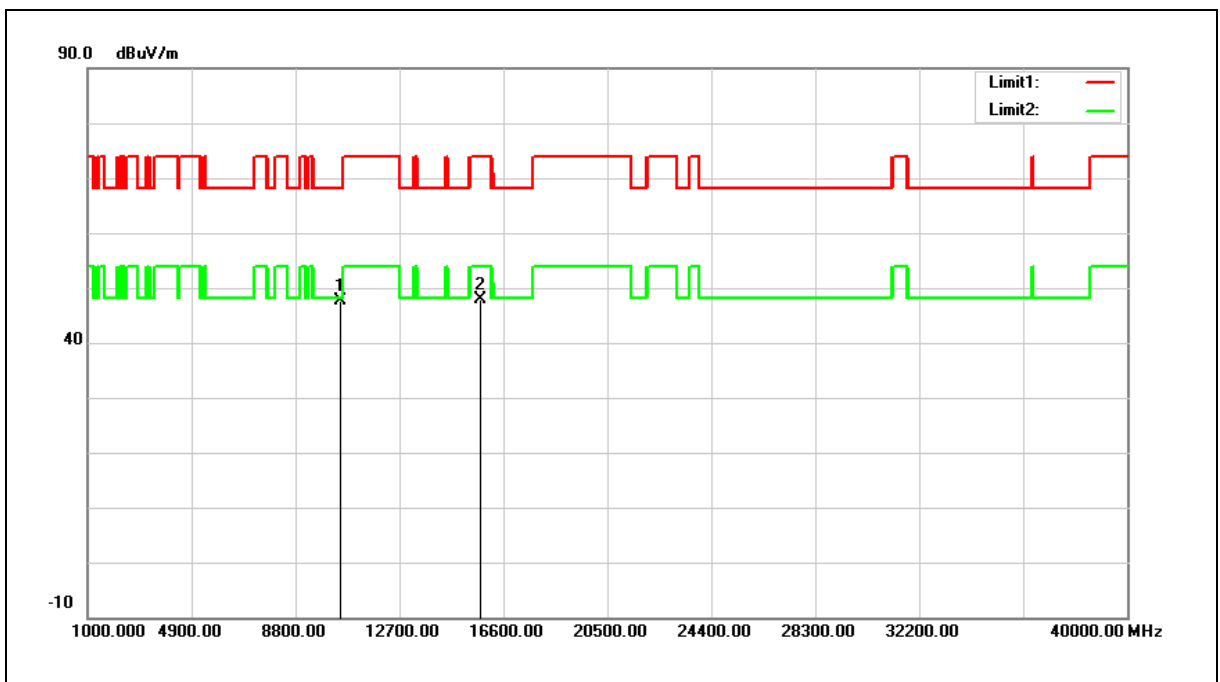


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.59	12.00	47.59	68.20	-20.61	peak
2	15720.000	33.80	14.13	47.93	74.00	-26.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

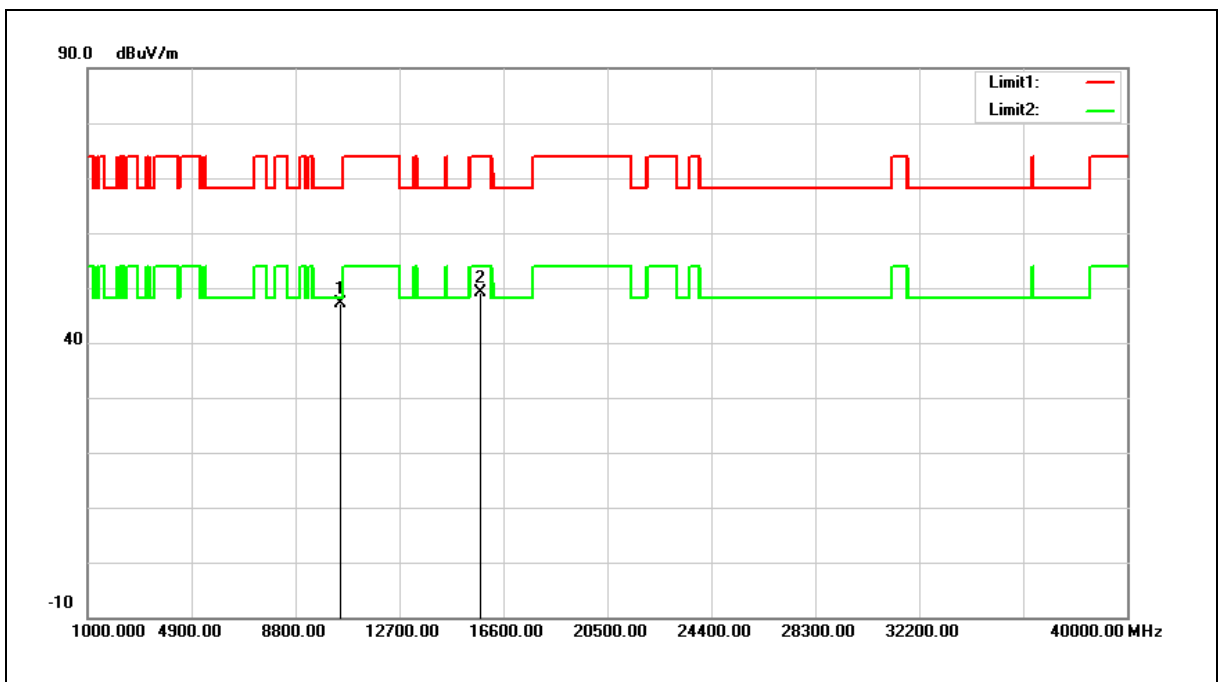


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.06	12.00	47.06	68.20	-21.14	peak
2	15720.000	34.94	14.13	49.07	74.00	-24.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

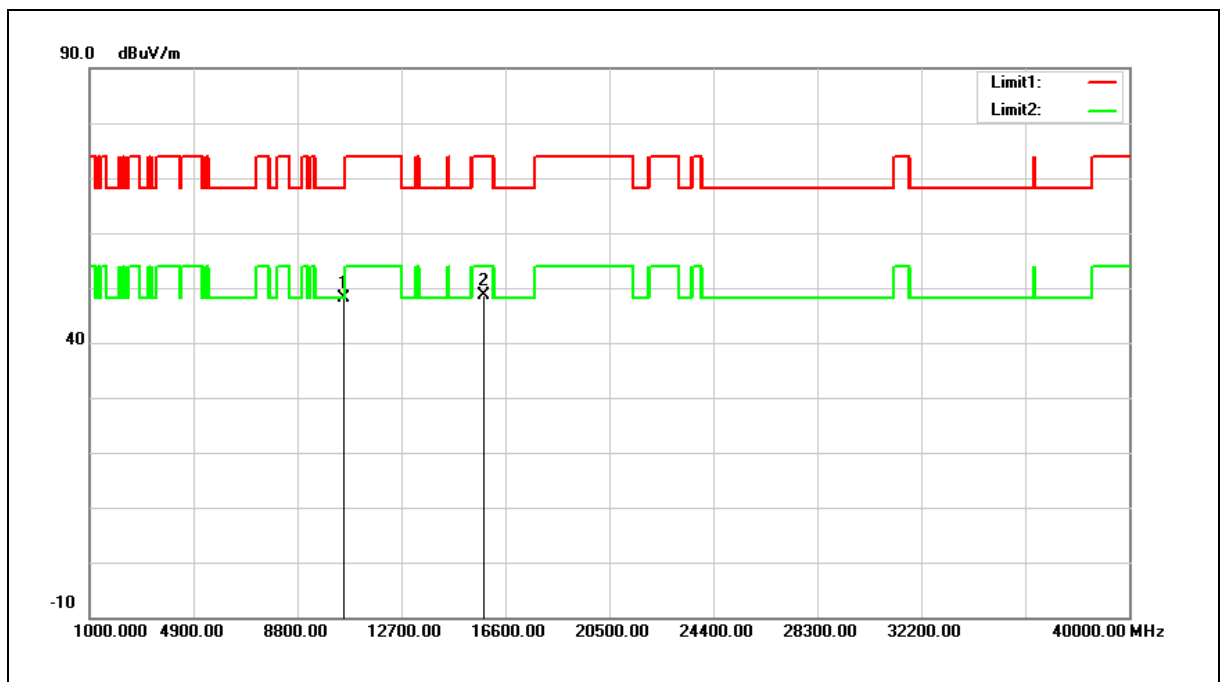


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	36.17	12.06	48.23	68.20	-19.97	peak
2	15780.000	34.67	14.02	48.69	74.00	-25.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

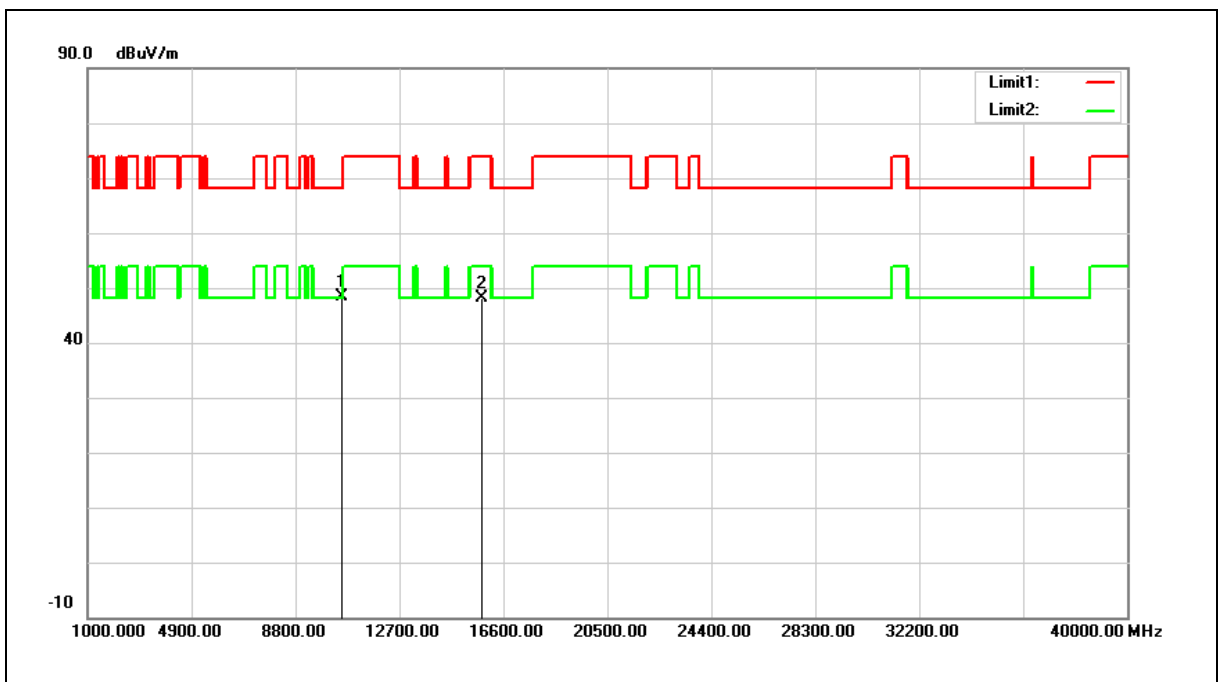


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	36.26	12.06	48.32	68.20	-19.88	peak
2	15780.000	34.00	14.02	48.02	74.00	-25.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

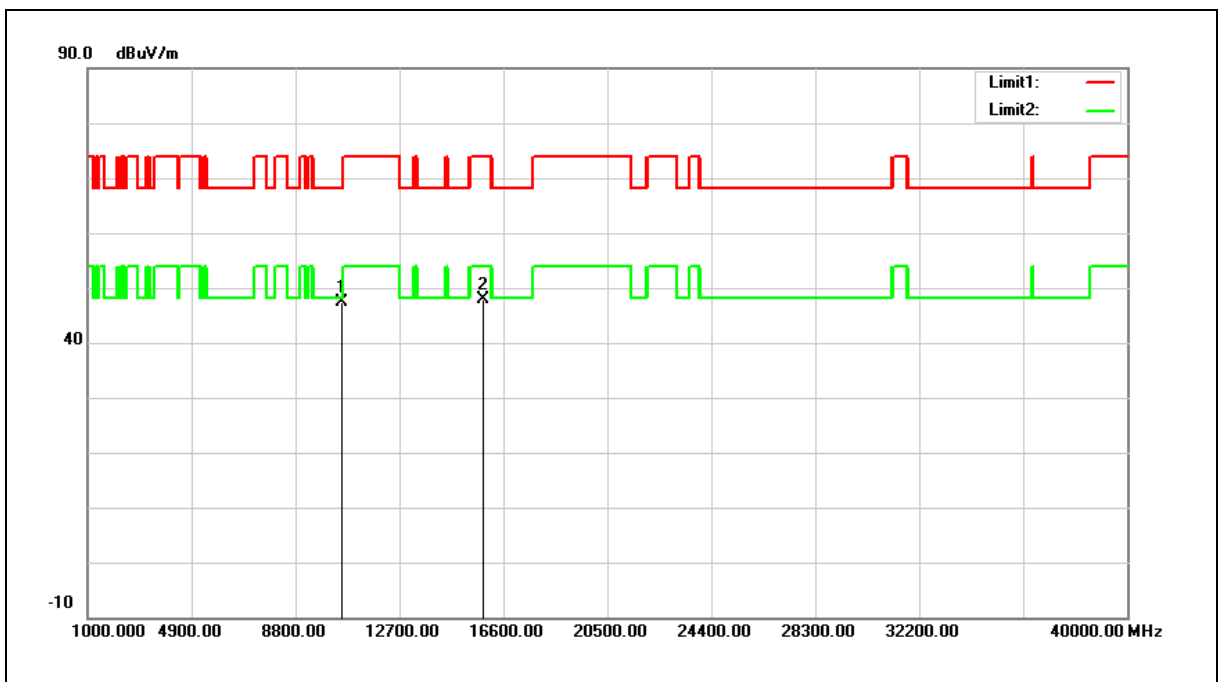


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.27	12.09	47.36	68.20	-20.84	peak
2	15840.000	33.97	13.88	47.85	74.00	-26.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

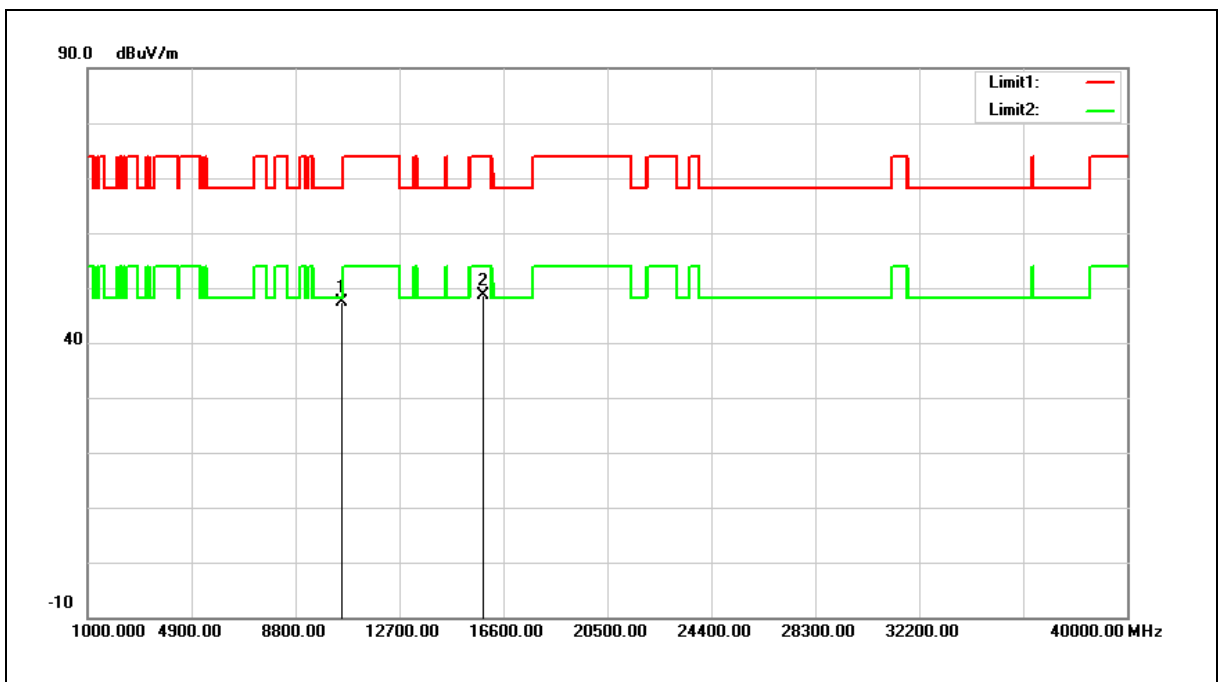


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.17	12.09	47.26	68.20	-20.94	peak
2	15840.000	34.68	13.88	48.56	74.00	-25.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

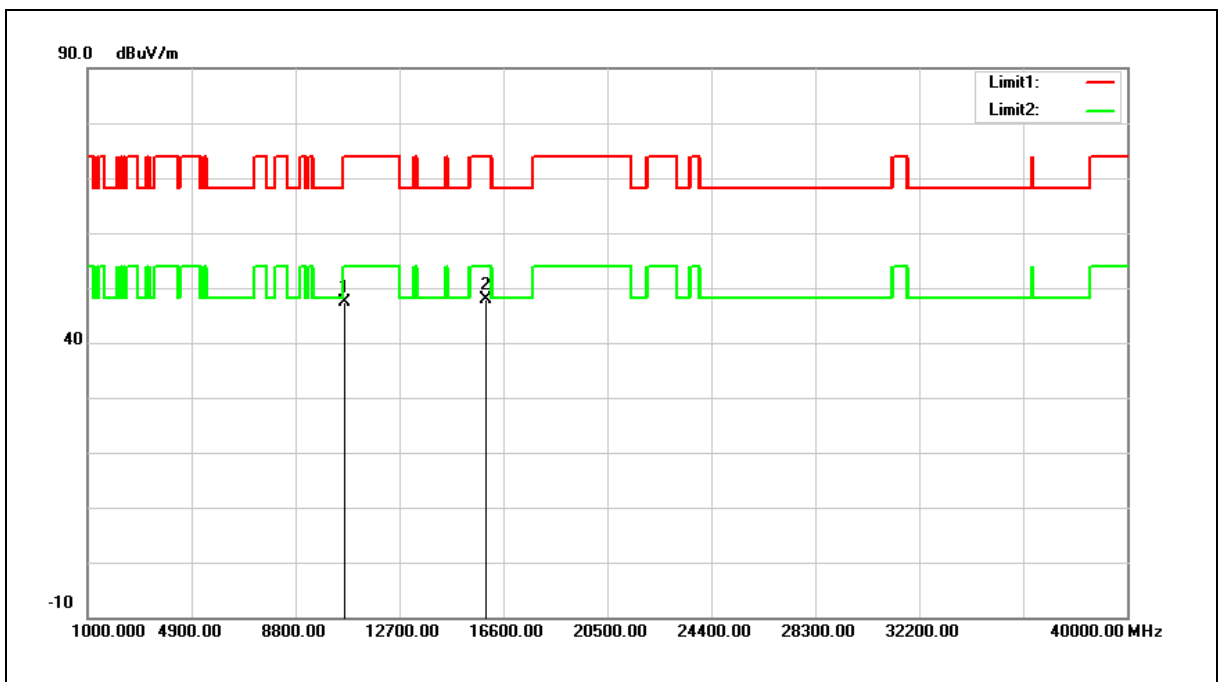


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.17	12.14	47.31	74.00	-26.69	peak
2	15960.000	34.37	13.63	48.00	74.00	-26.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

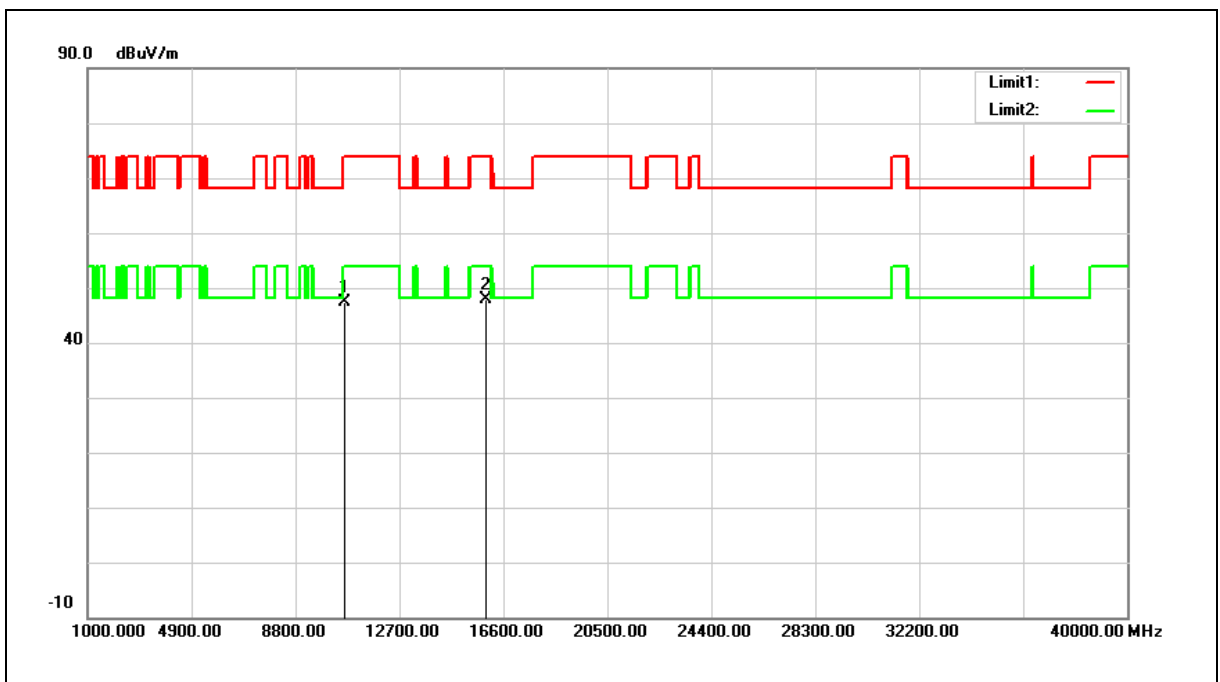


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.26	12.14	47.40	74.00	-26.60	peak
2	15960.000	34.36	13.63	47.99	74.00	-26.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

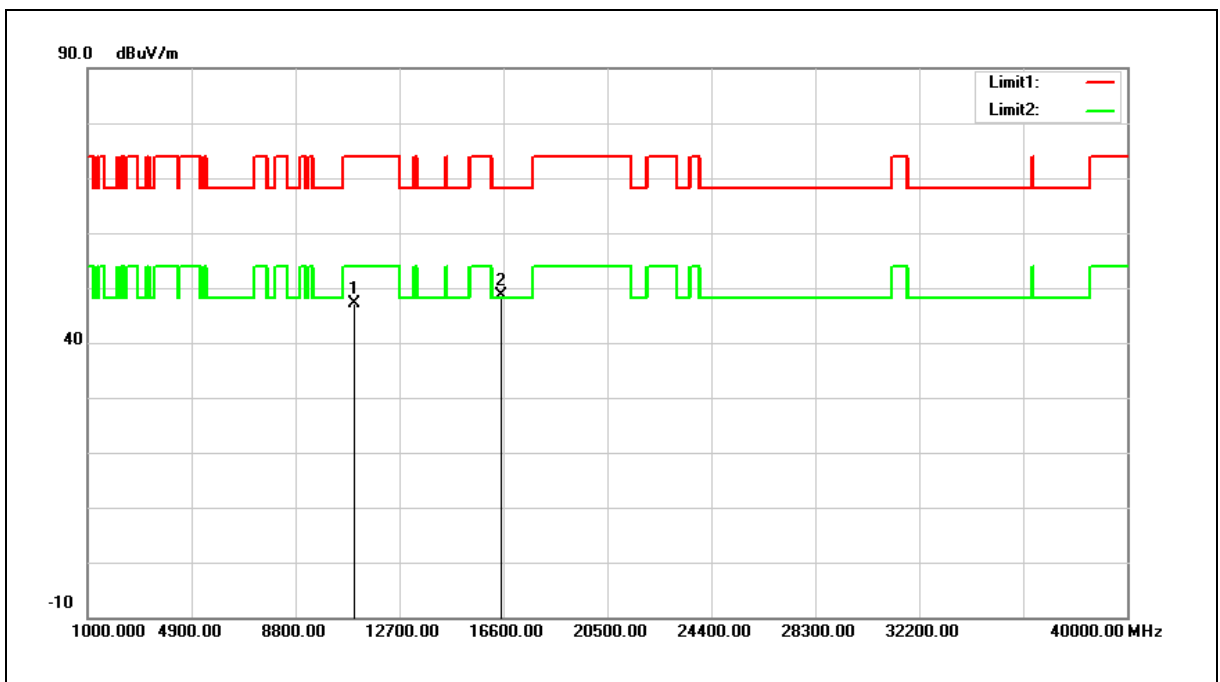


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.66	12.39	47.05	74.00	-26.95	peak
2	16500.000	34.45	14.24	48.69	68.20	-19.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

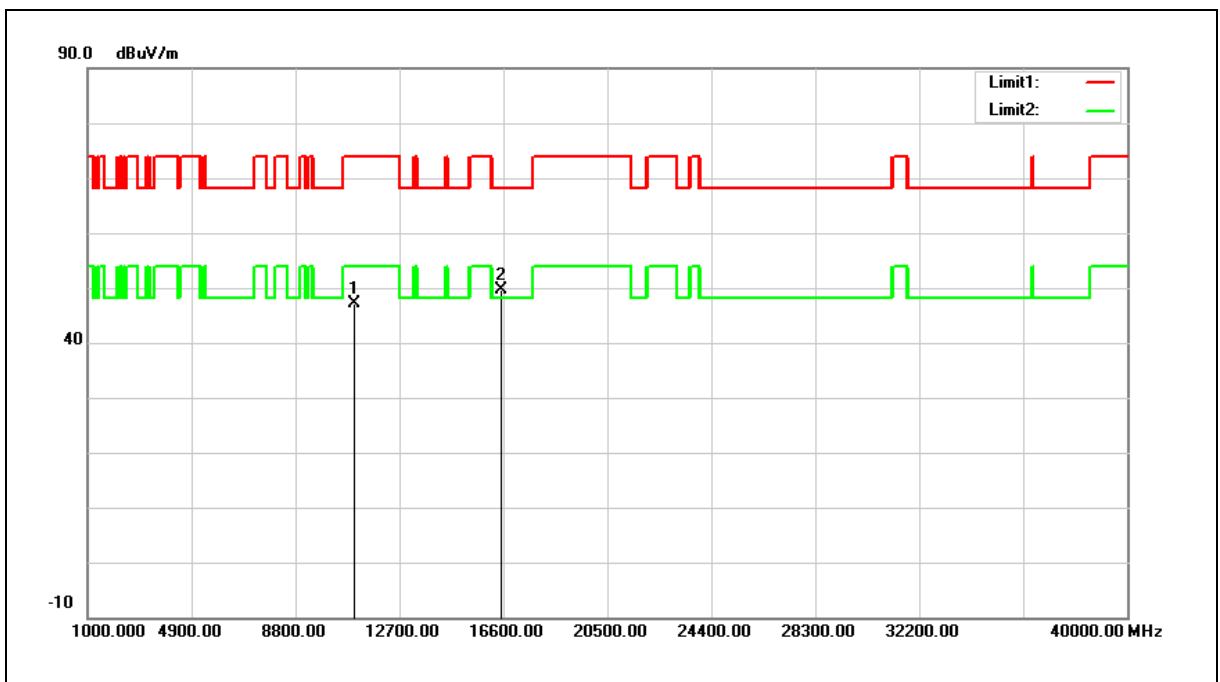


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.72	12.39	47.11	74.00	-26.89	peak
2	16500.000	35.42	14.24	49.66	68.20	-18.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

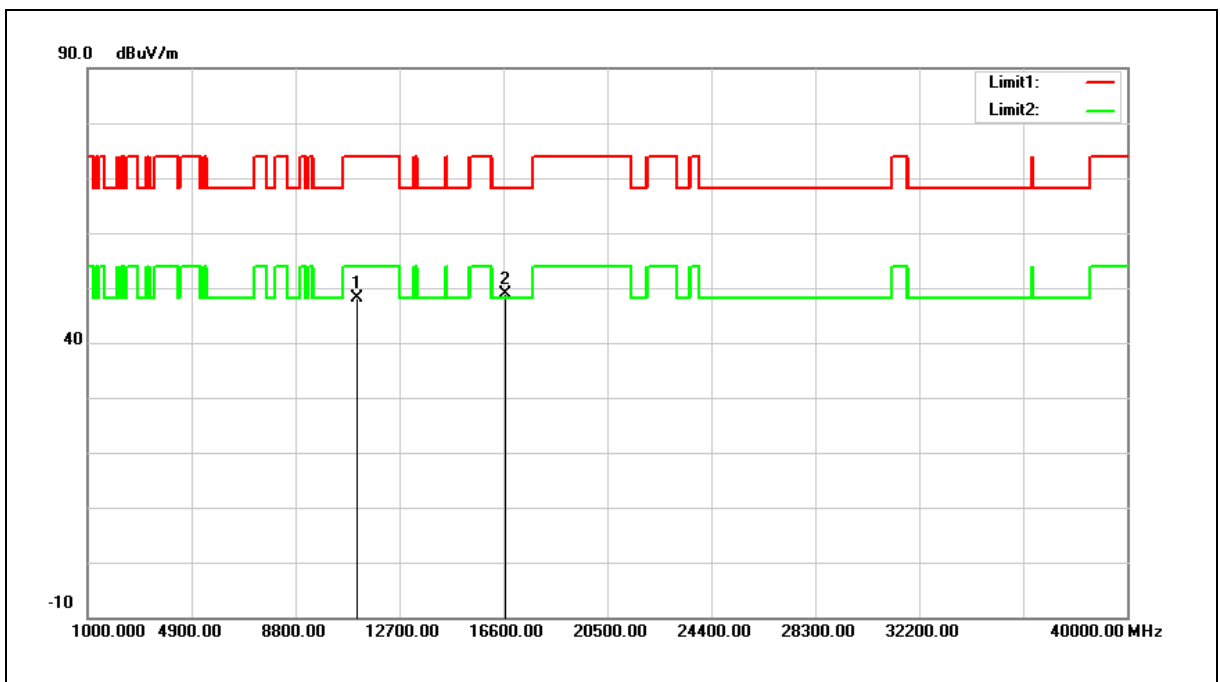


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.61	12.46	48.07	74.00	-25.93	peak
2	16680.000	33.64	15.22	48.86	68.20	-19.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

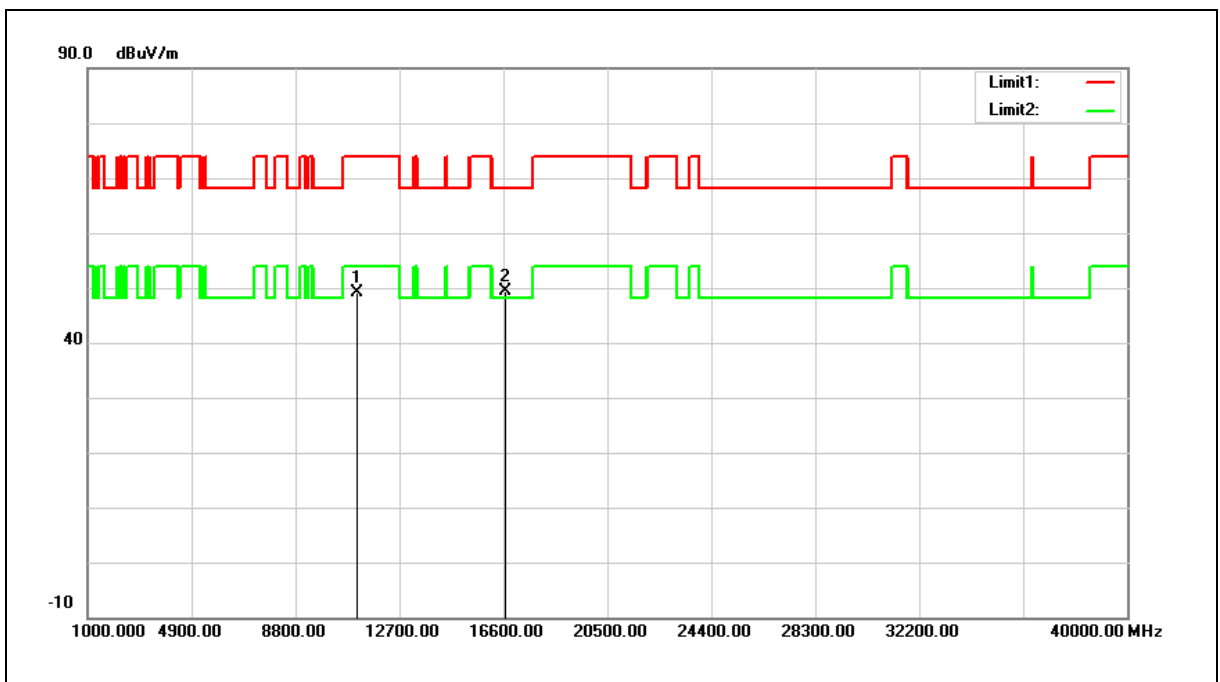


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.70	12.46	49.16	74.00	-24.84	peak
2	16680.000	34.20	15.22	49.42	68.20	-18.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

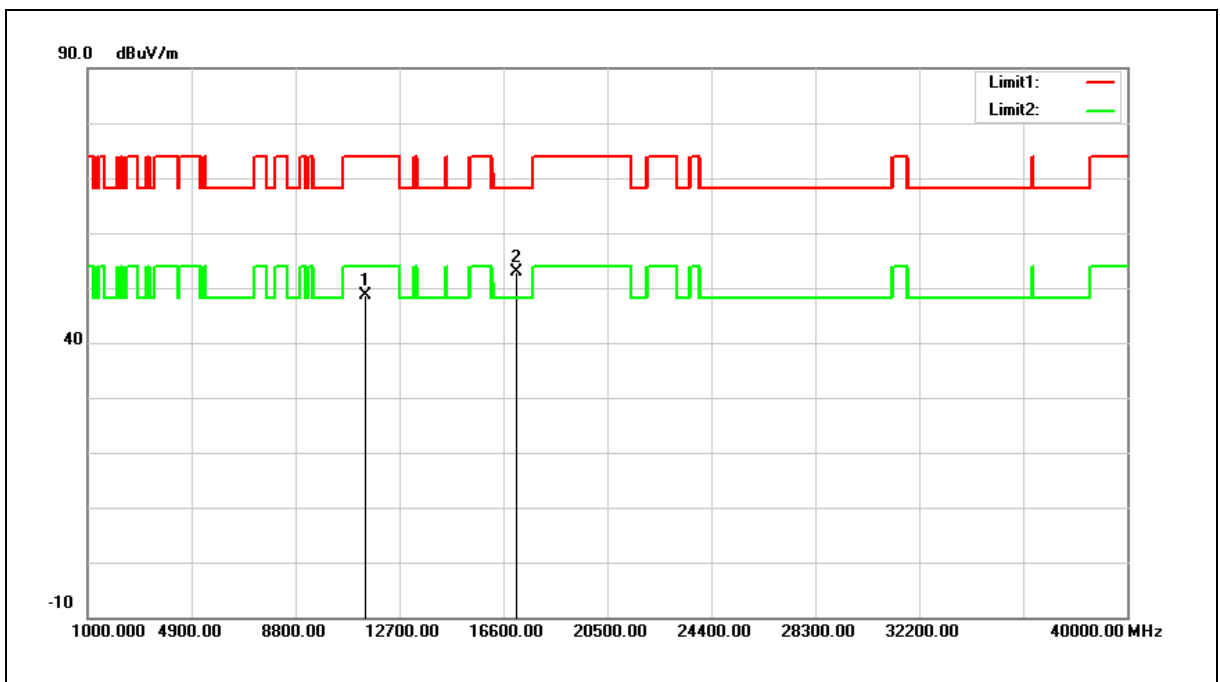


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	36.09	12.63	48.72	74.00	-25.28	peak
2	17100.000	35.16	17.63	52.79	68.20	-15.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

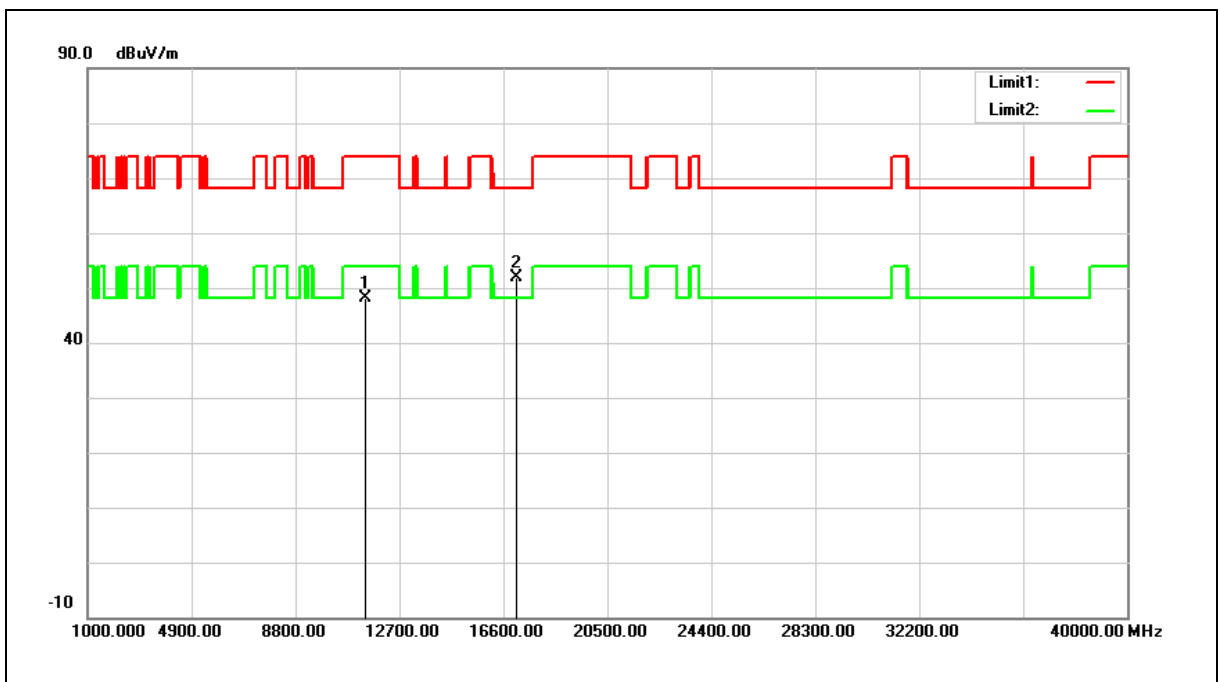


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.47	12.63	48.10	74.00	-25.90	peak
2	17100.000	34.20	17.63	51.83	68.20	-16.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

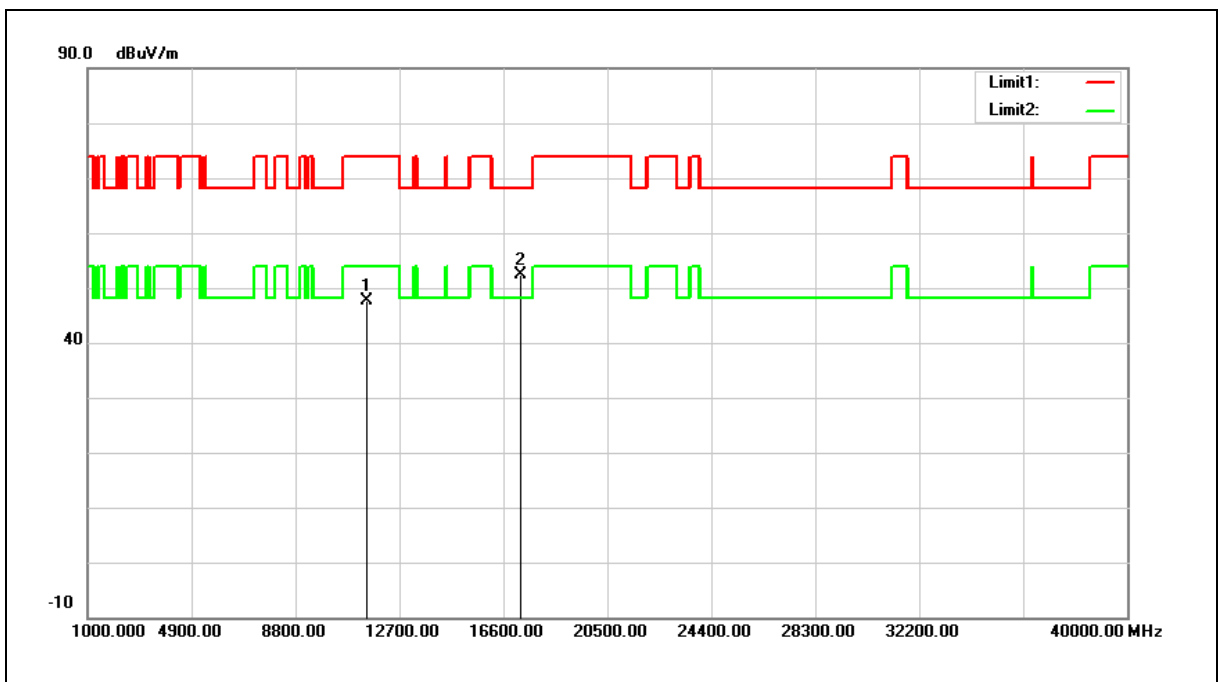


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.95	12.68	47.63	74.00	-26.37	peak
2	17235.000	33.83	18.52	52.35	68.20	-15.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

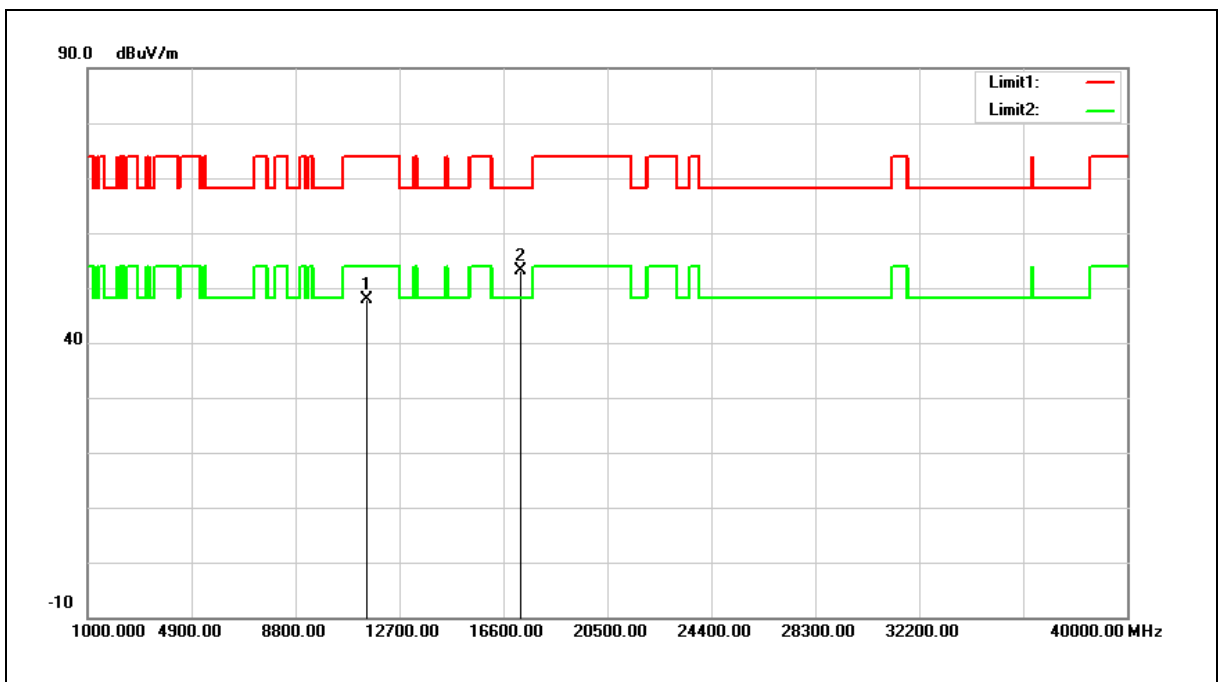


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.24	12.68	47.92	74.00	-26.08	peak
2	17235.000	34.60	18.52	53.12	68.20	-15.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

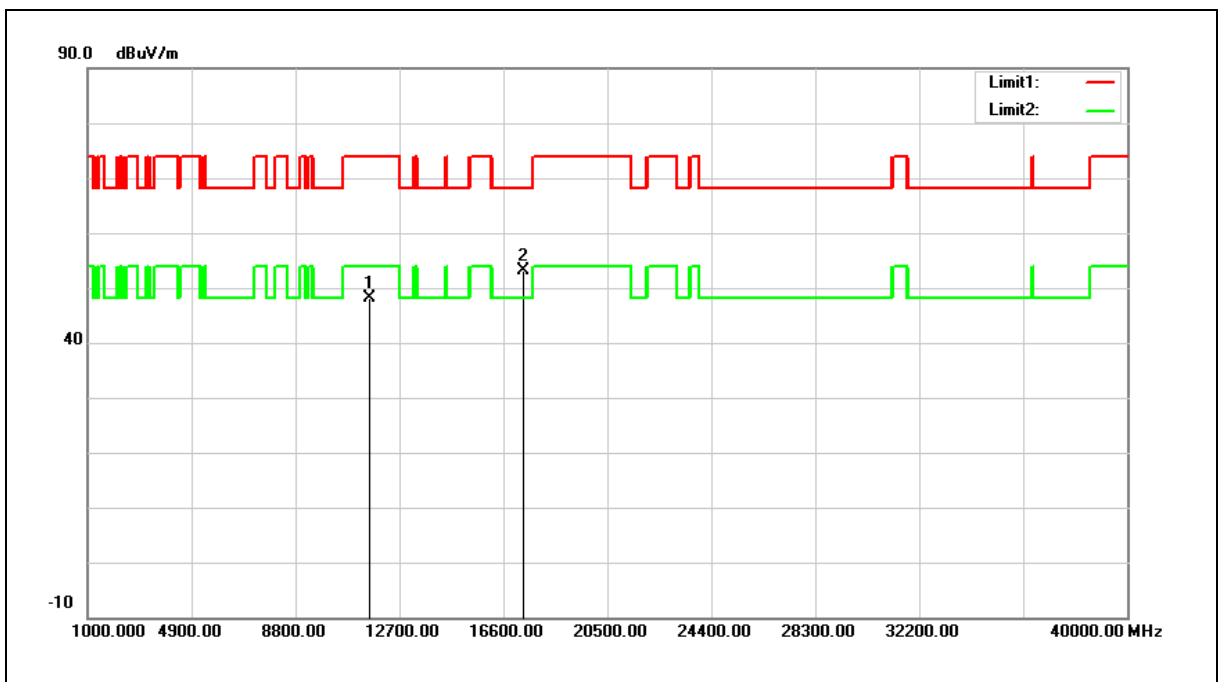


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.57	12.59	48.16	74.00	-25.84	peak
2	17355.000	33.73	19.32	53.05	68.20	-15.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

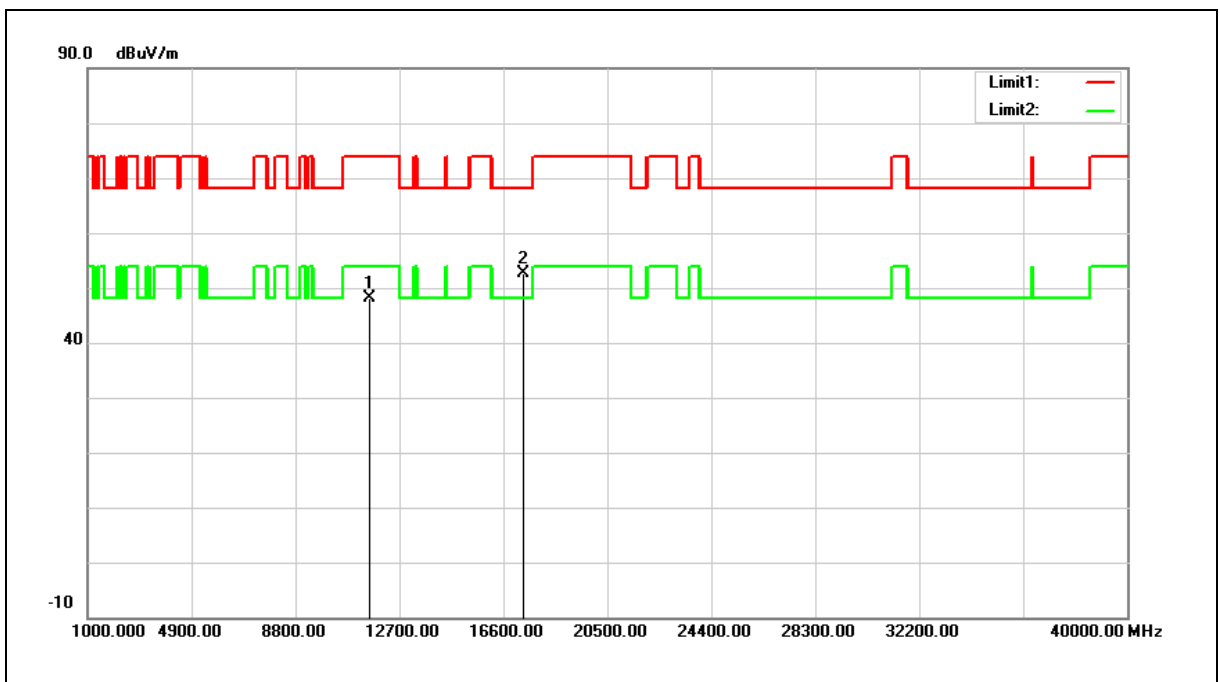


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.43	12.59	48.02	74.00	-25.98	peak
2	17355.000	33.39	19.32	52.71	68.20	-15.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

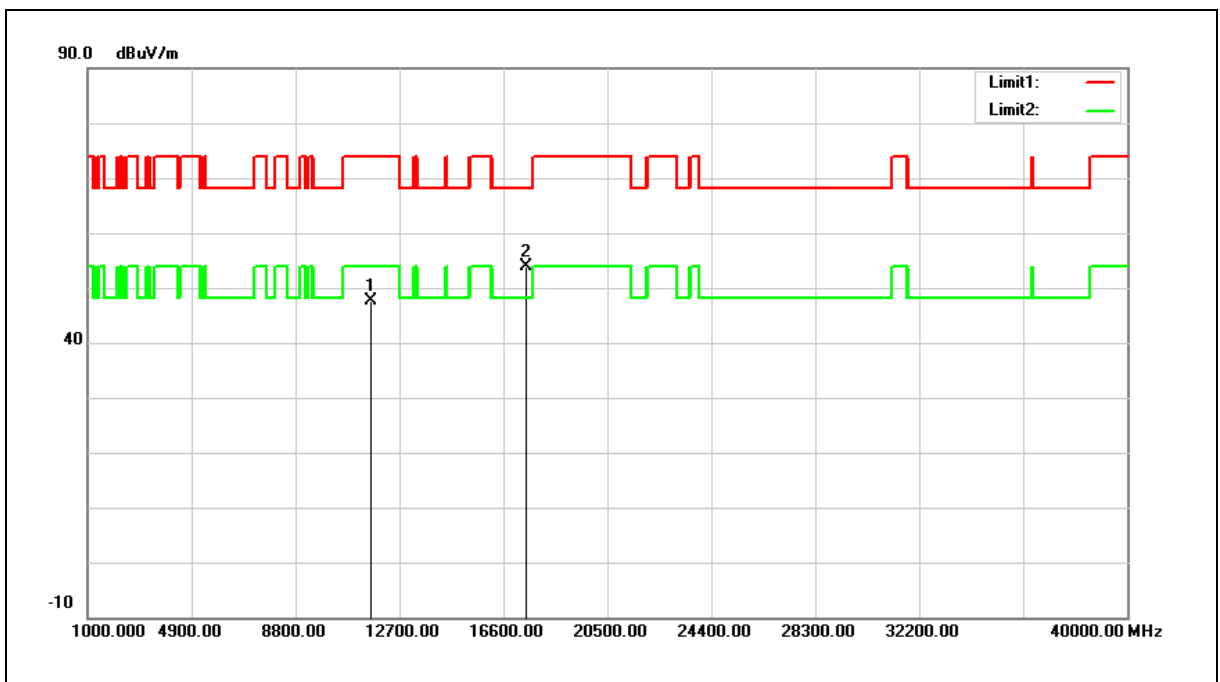


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.22	12.48	47.70	74.00	-26.30	peak
2	17475.000	33.79	20.13	53.92	68.20	-14.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

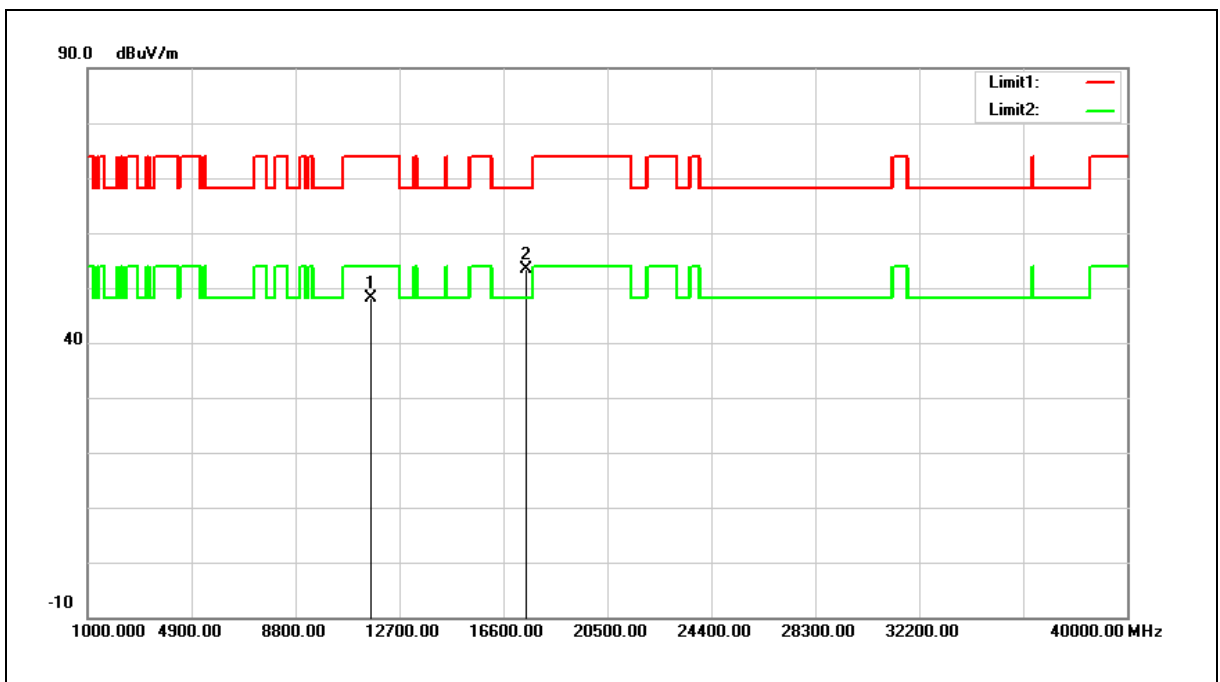


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.54	12.48	48.02	74.00	-25.98	peak
2	17475.000	33.31	20.13	53.44	68.20	-14.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

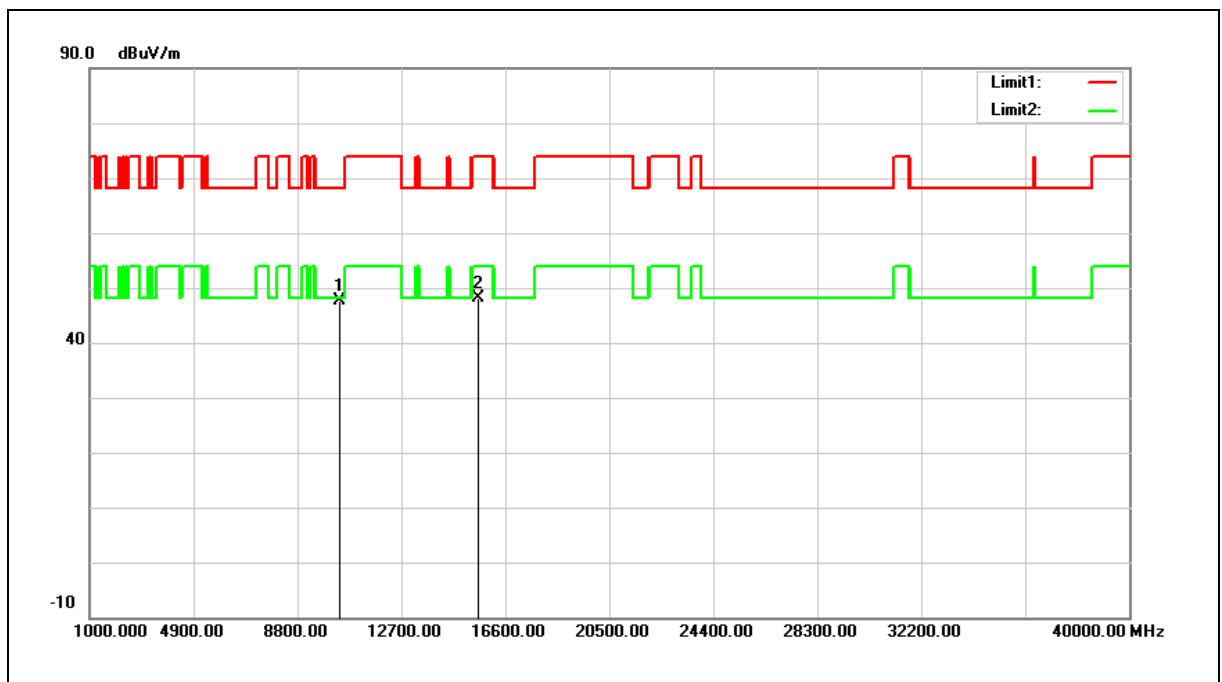


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.86	11.75	47.61	68.20	-20.59	peak
2	15570.000	33.67	14.45	48.12	74.00	-25.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

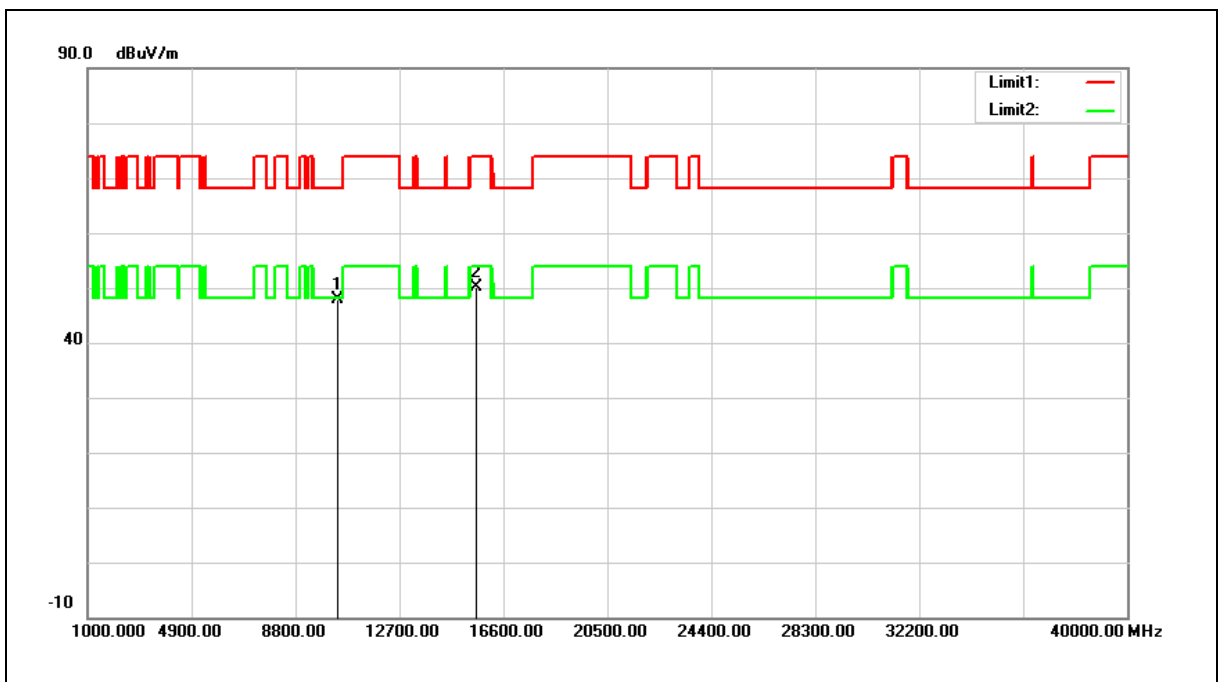


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	36.12	11.75	47.87	68.20	-20.33	peak
2	15570.000	35.62	14.45	50.07	74.00	-23.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

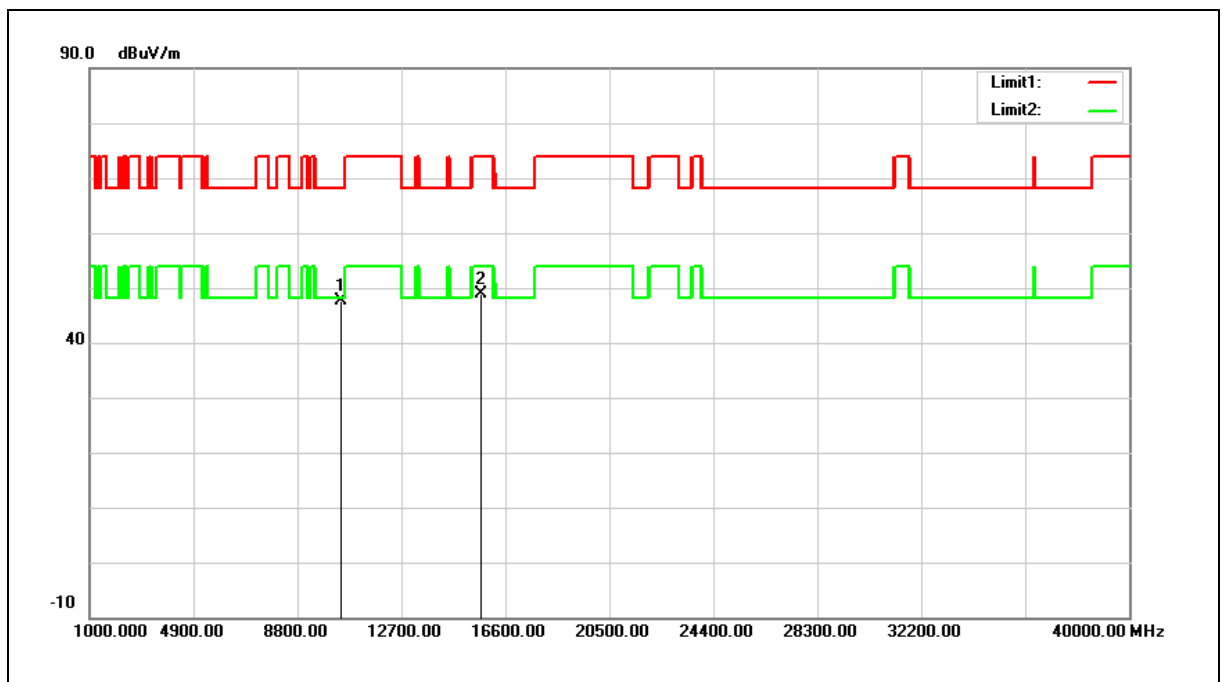


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.61	11.95	47.56	68.20	-20.64	peak
2	15690.000	34.72	14.19	48.91	74.00	-25.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

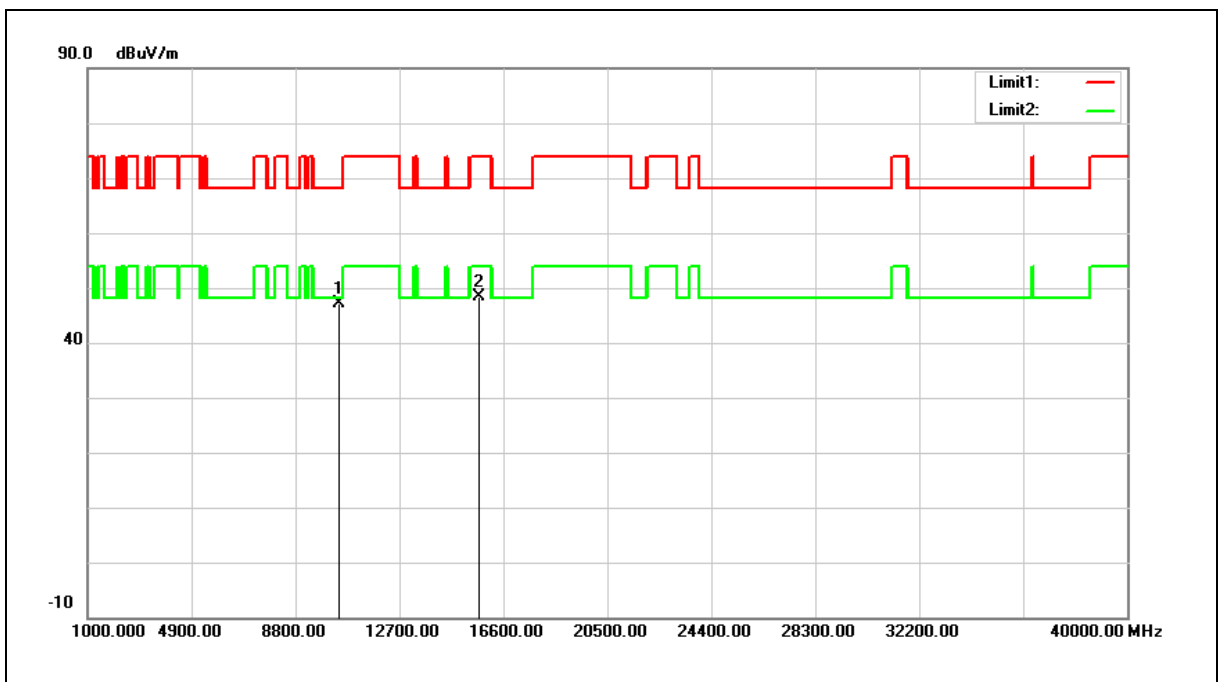


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.11	11.95	47.06	68.20	-21.14	peak
2	15690.000	34.13	14.19	48.32	74.00	-25.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

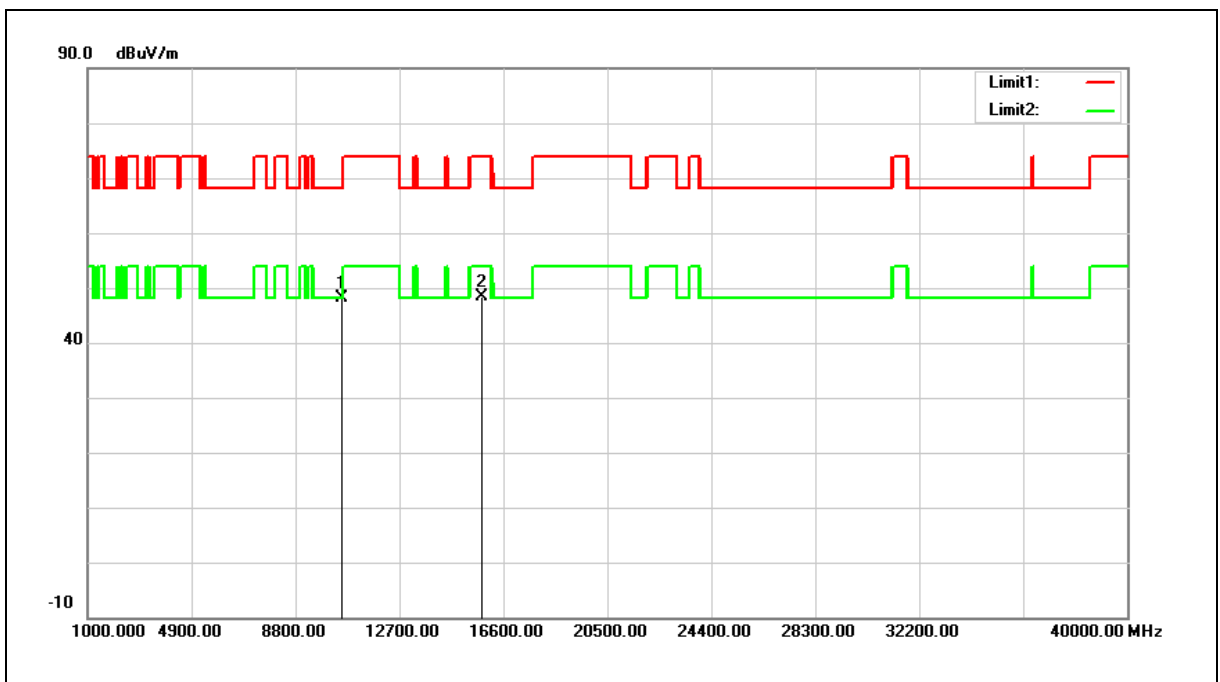


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	35.99	12.06	48.05	68.20	-20.15	peak
2	15810.000	34.36	13.96	48.32	74.00	-25.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

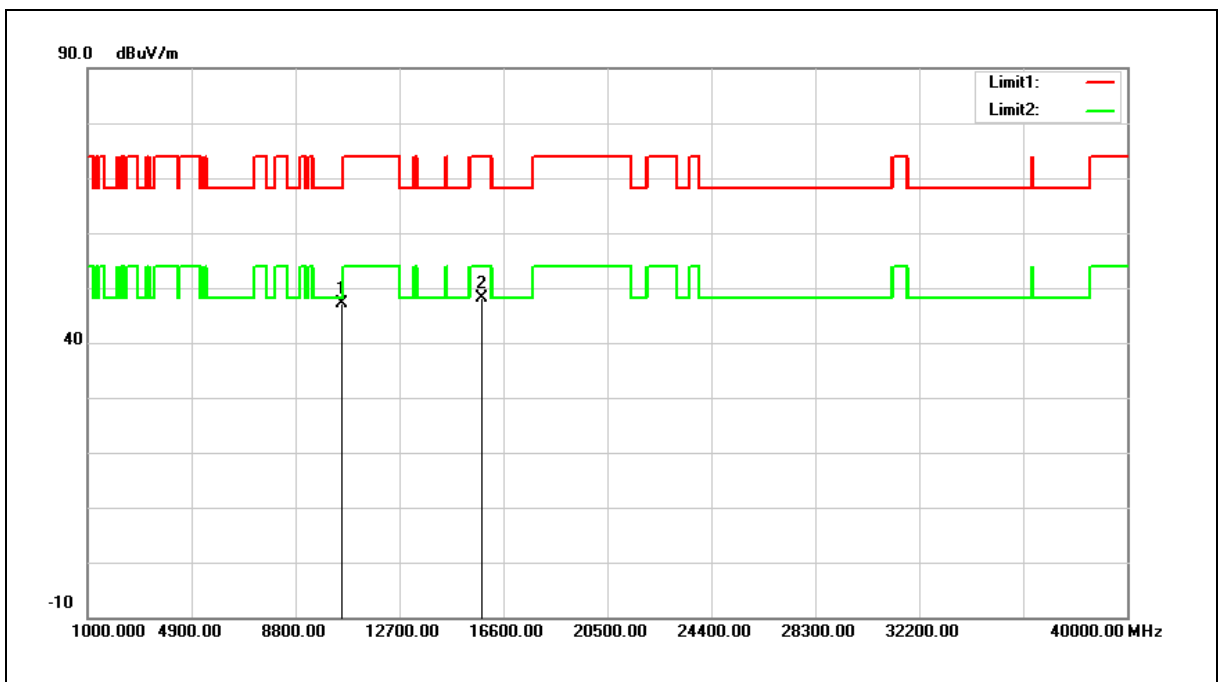


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	35.16	12.06	47.22	68.20	-20.98	peak
2	15810.000	34.27	13.96	48.23	74.00	-25.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

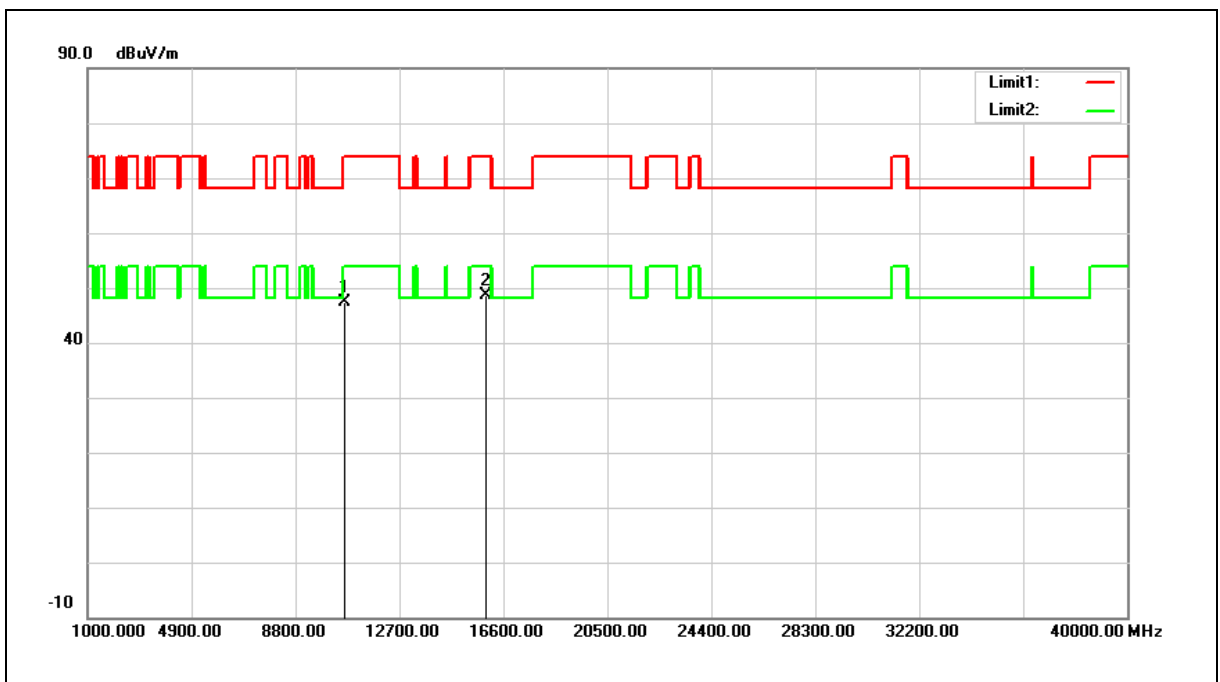


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.25	12.12	47.37	74.00	-26.63	peak
2	15930.000	34.84	13.70	48.54	74.00	-25.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

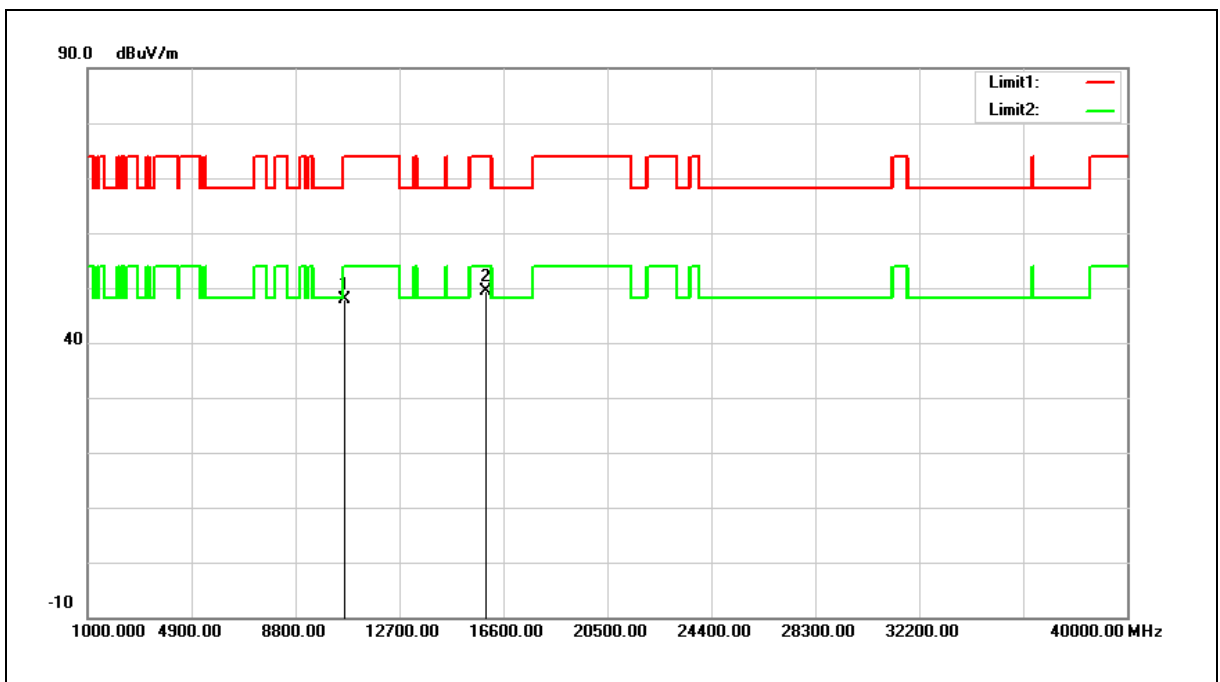


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.79	12.12	47.91	74.00	-26.09	peak
2	15930.000	35.75	13.70	49.45	74.00	-24.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

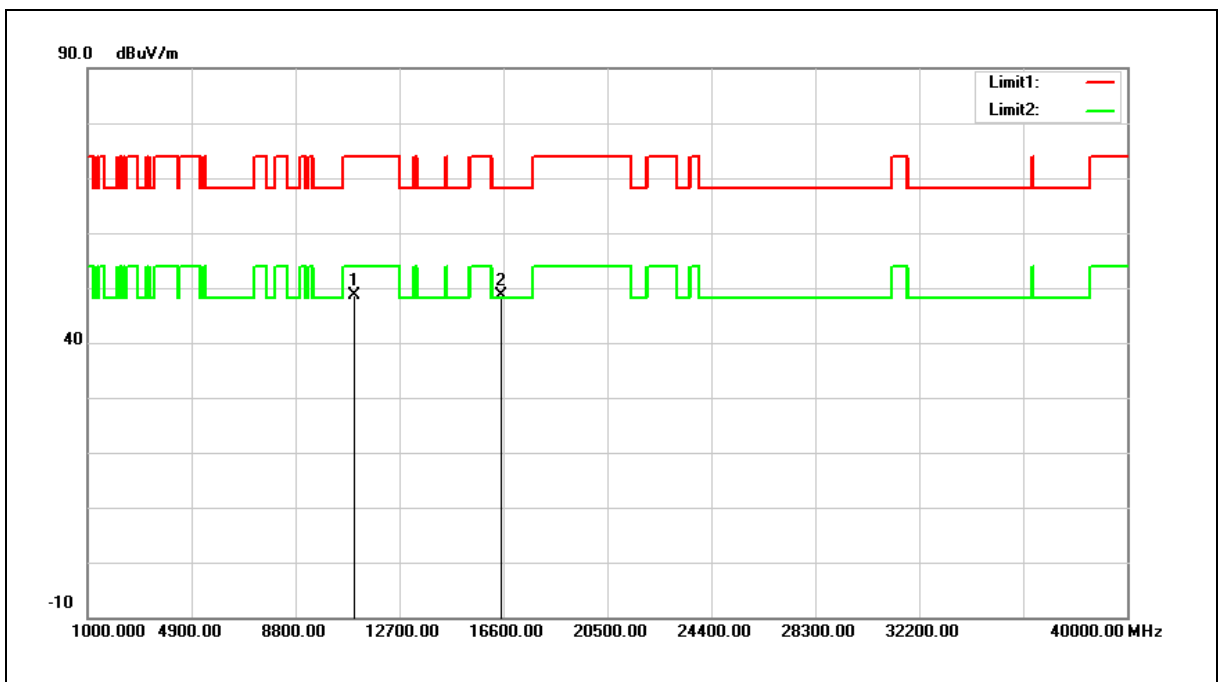


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	36.15	12.40	48.55	74.00	-25.45	peak
2	16530.000	34.25	14.41	48.66	68.20	-19.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

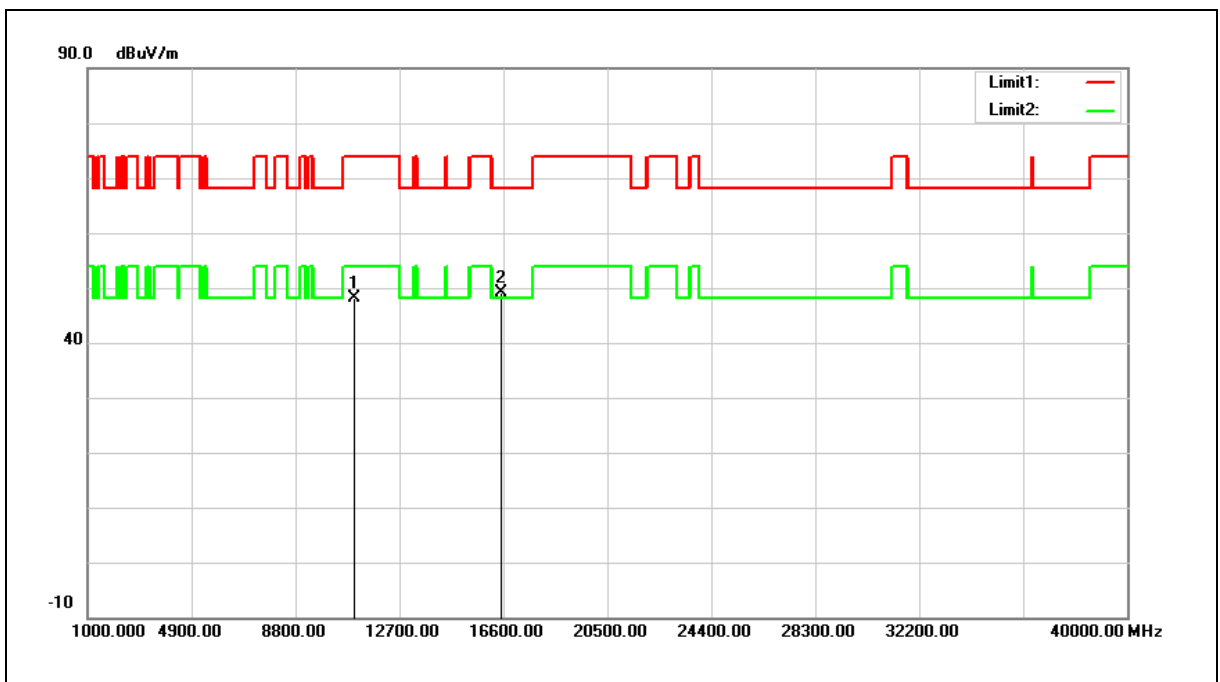


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.66	12.40	48.06	74.00	-25.94	peak
2	16530.000	34.66	14.41	49.07	68.20	-19.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

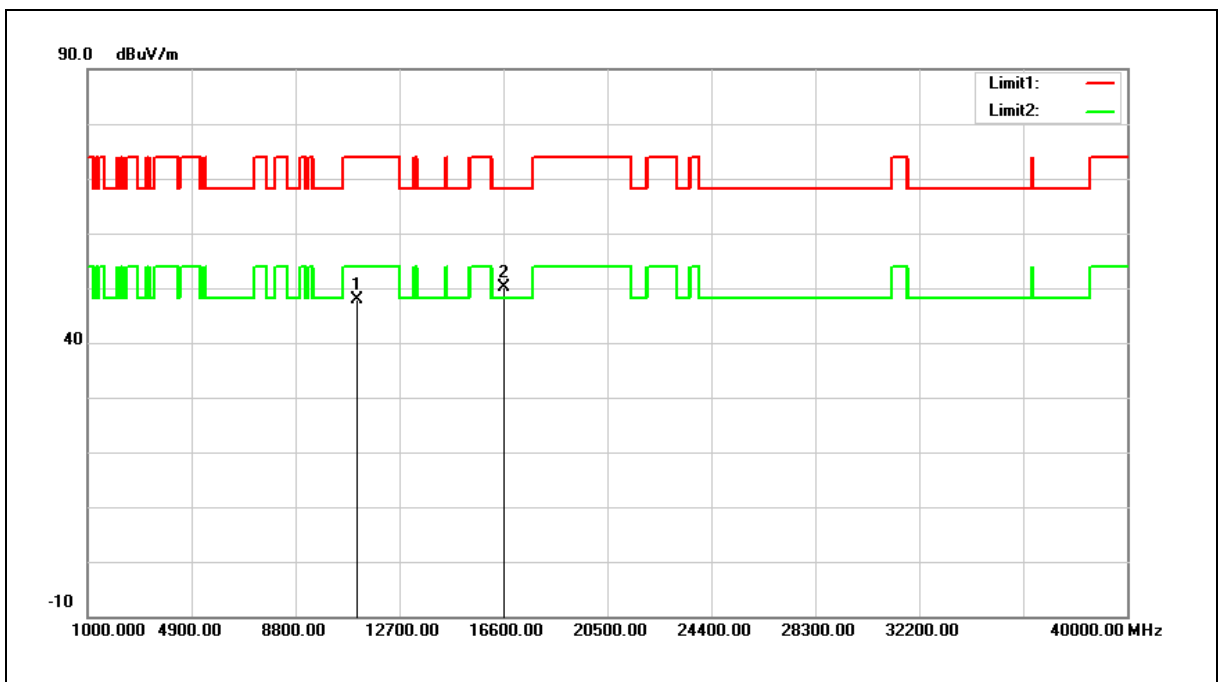


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.40	12.45	47.85	74.00	-26.15	peak
2	16650.000	35.04	15.06	50.10	68.20	-18.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

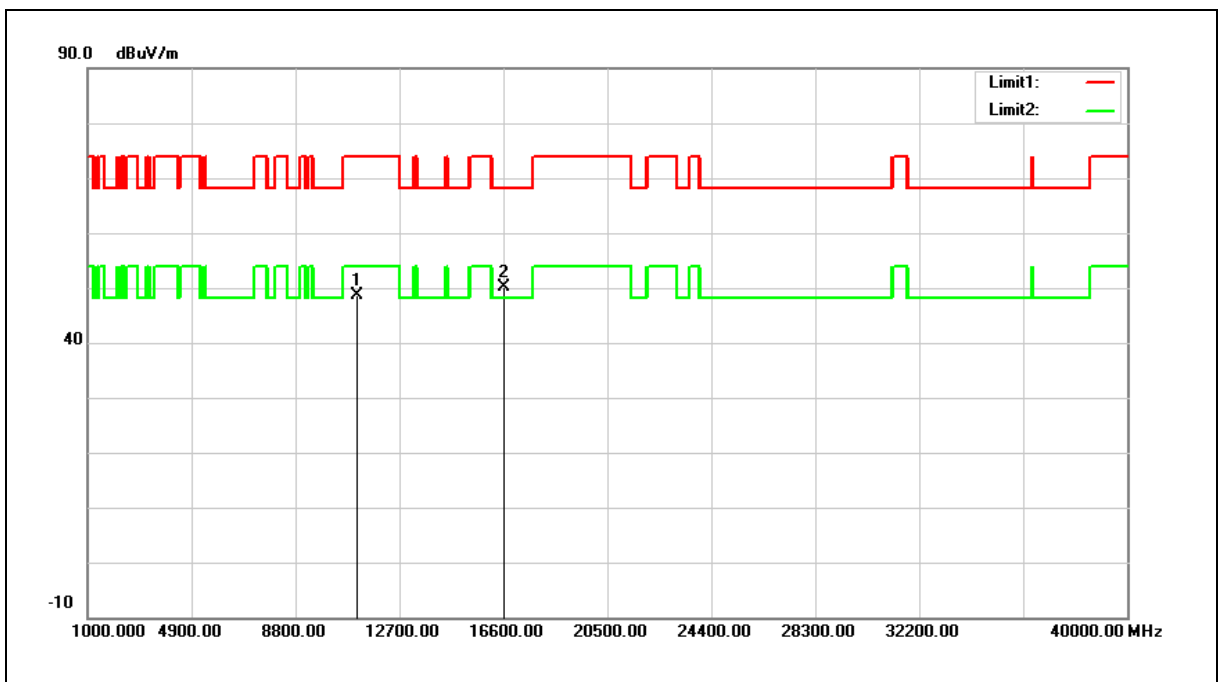


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	36.19	12.45	48.64	74.00	-25.36	peak
2	16650.000	34.96	15.06	50.02	68.20	-18.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

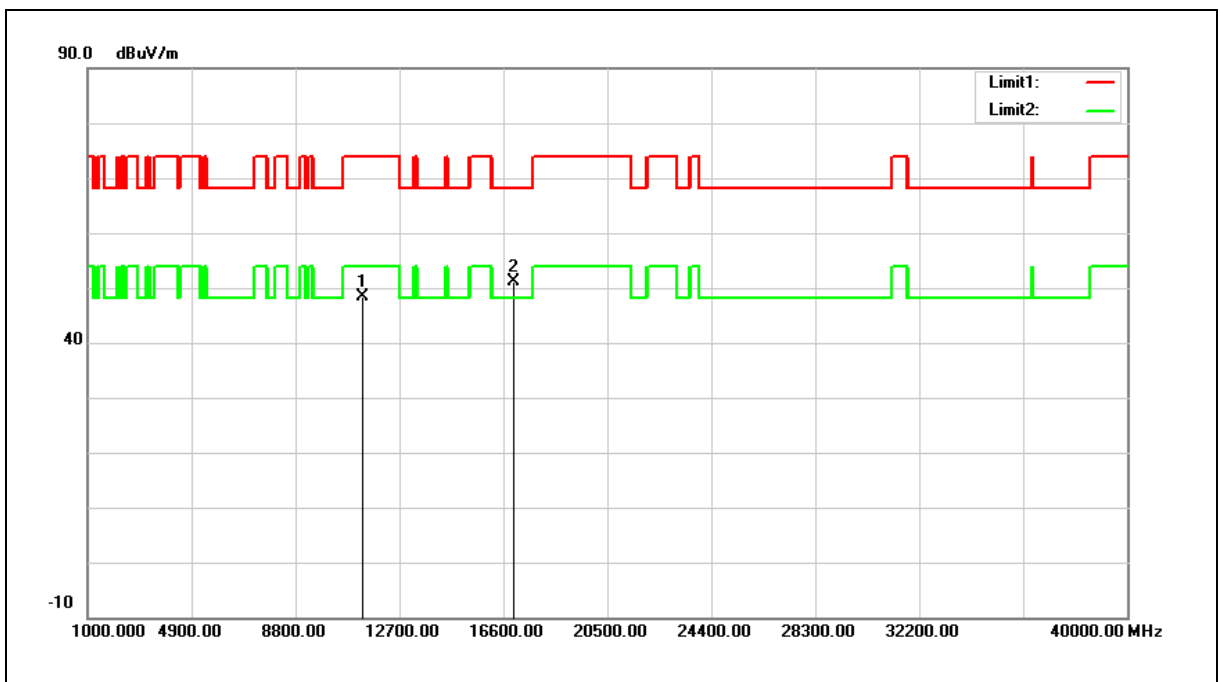


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.76	12.59	48.35	74.00	-25.65	peak
2	17010.000	34.01	17.02	51.03	68.20	-17.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

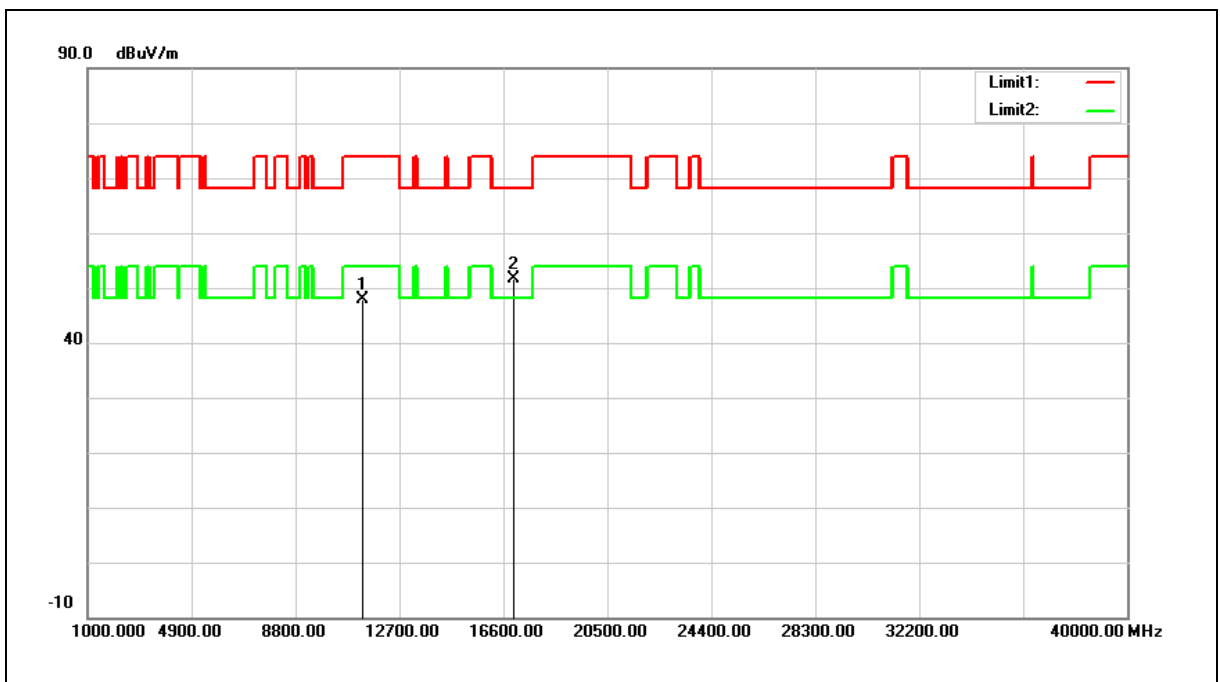


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.24	12.59	47.83	74.00	-26.17	peak
2	17010.000	34.61	17.02	51.63	68.20	-16.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

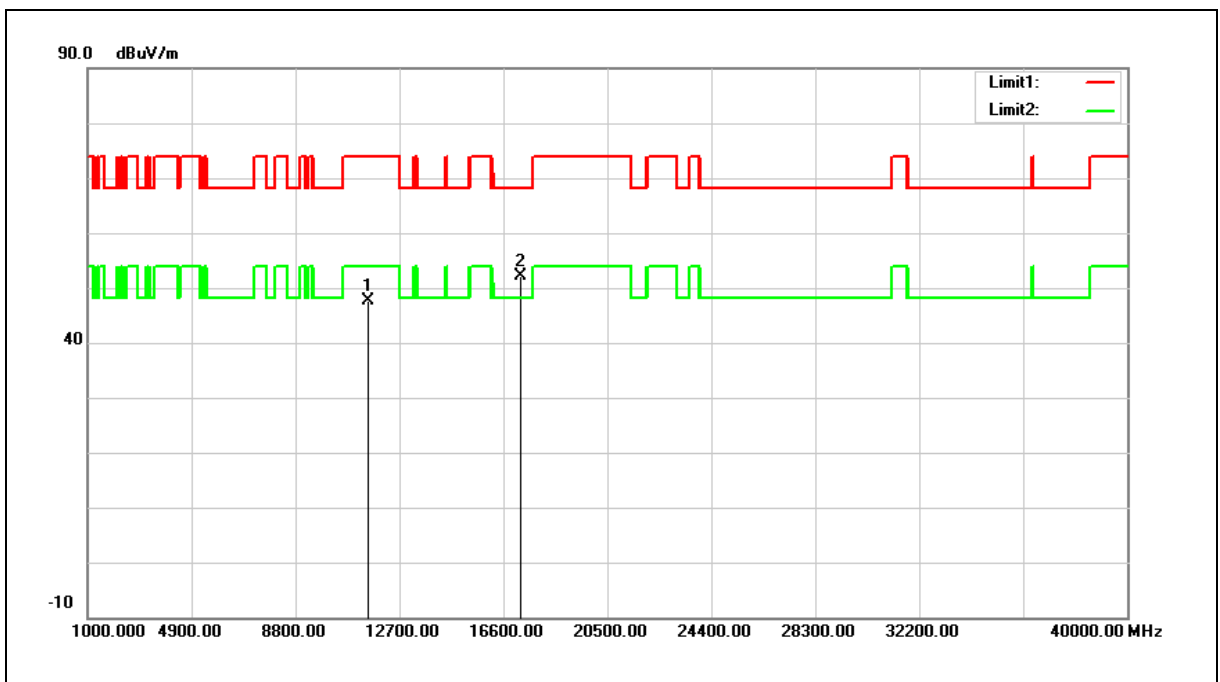


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.88	12.68	47.56	74.00	-26.44	peak
2	17265.000	33.43	18.72	52.15	68.20	-16.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

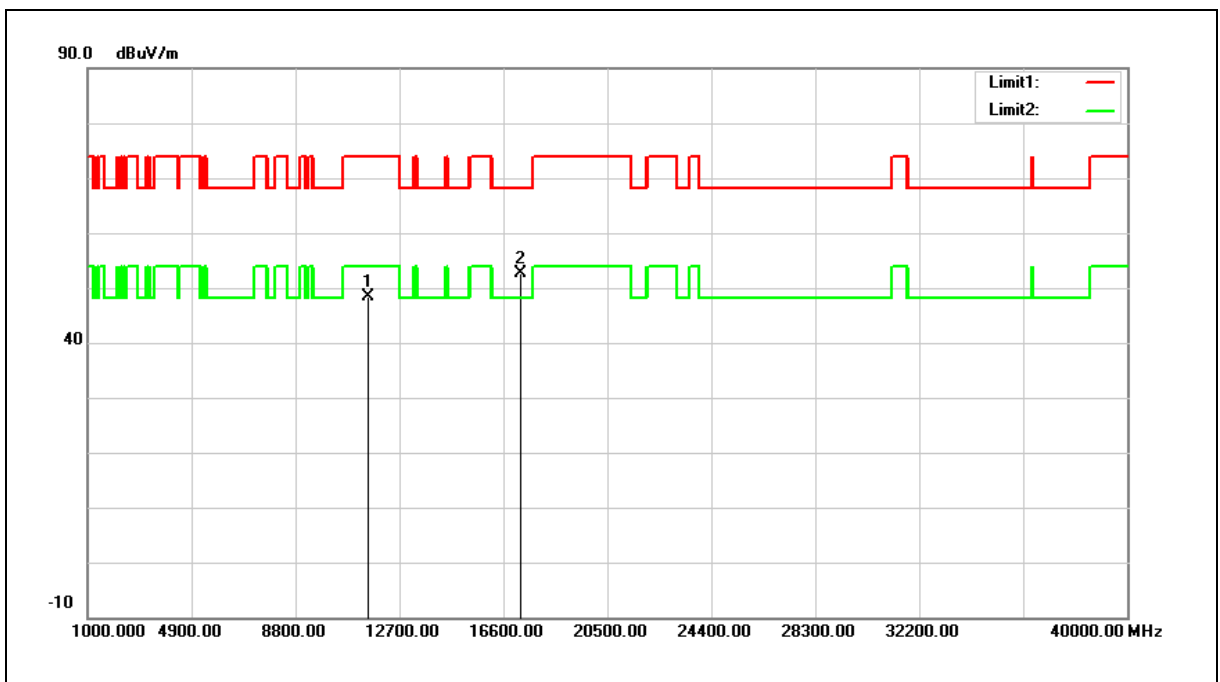


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.64	12.68	48.32	74.00	-25.68	peak
2	17265.000	33.88	18.72	52.60	68.20	-15.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

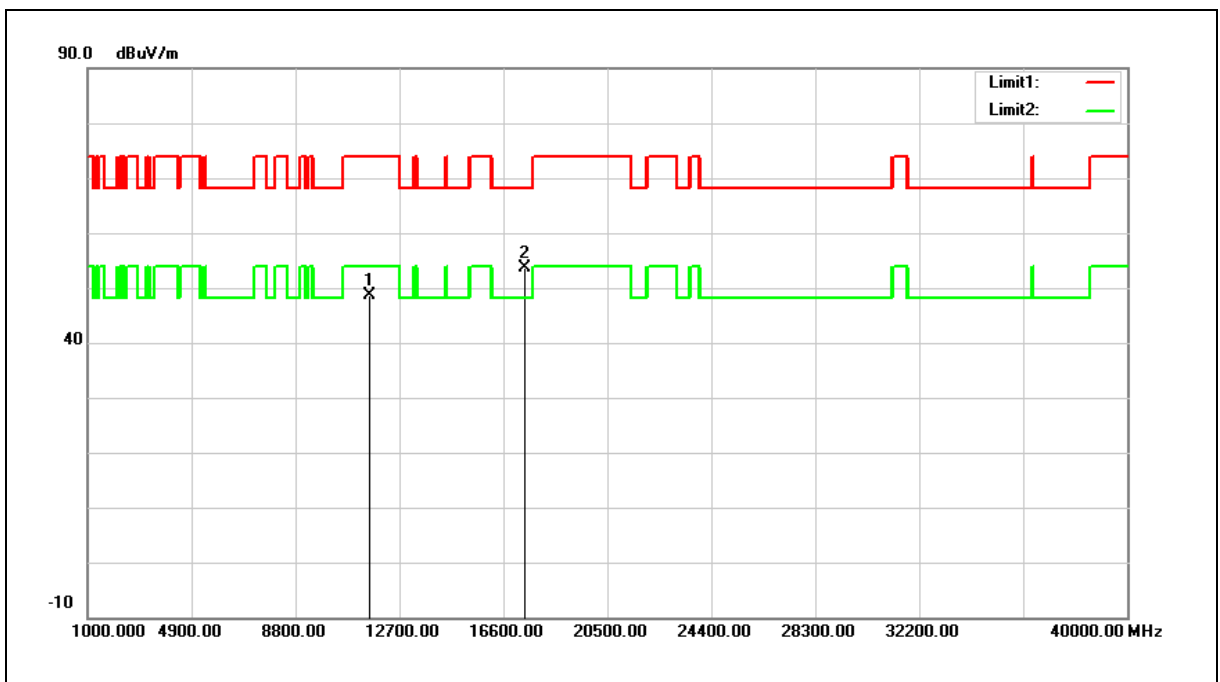


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	36.00	12.56	48.56	74.00	-25.44	peak
2	17385.000	34.23	19.52	53.75	68.20	-14.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

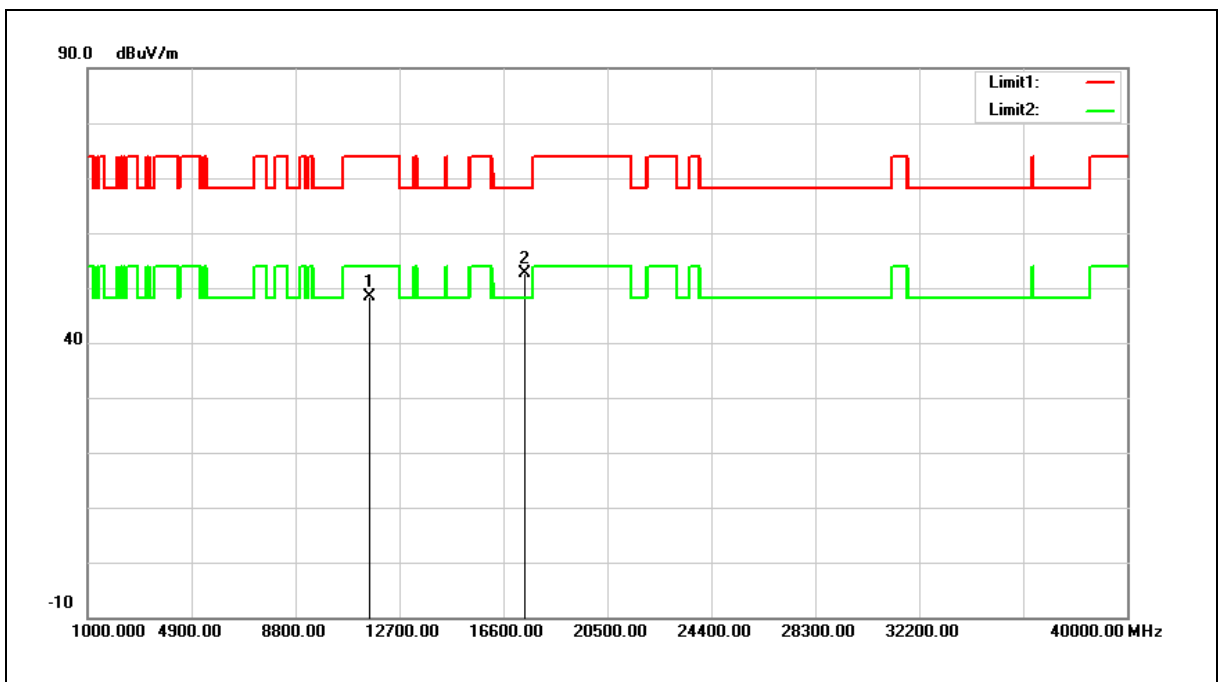


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.86	12.56	48.42	74.00	-25.58	peak
2	17385.000	33.11	19.52	52.63	68.20	-15.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

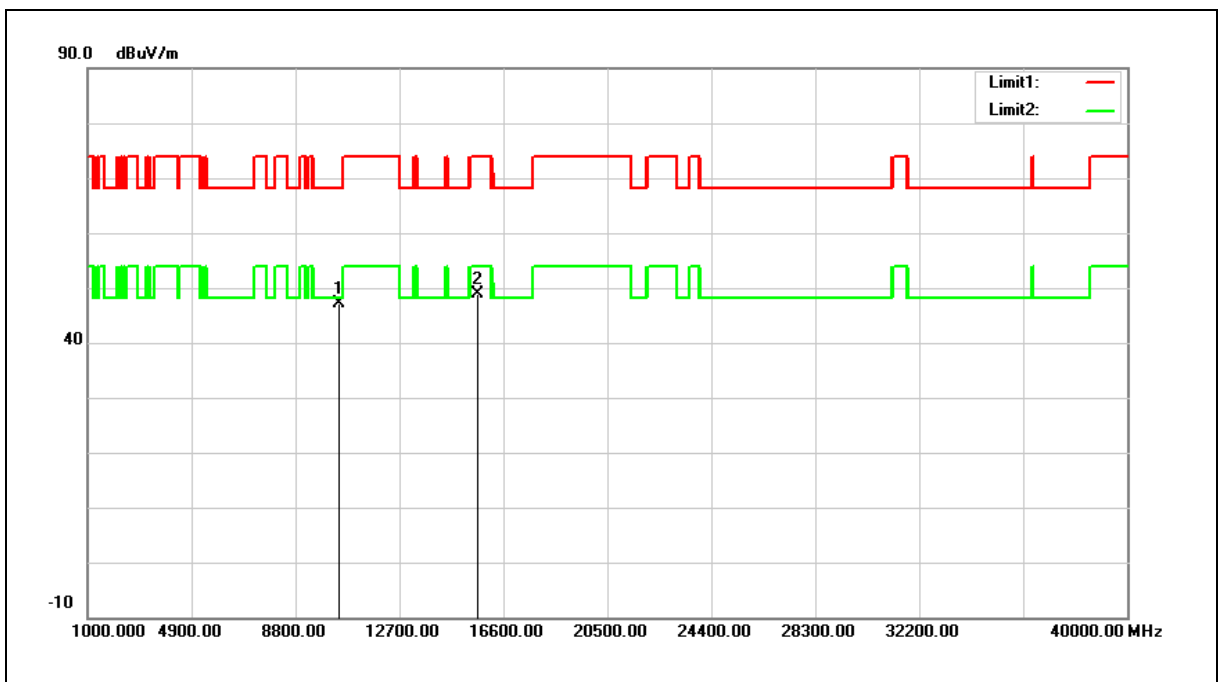


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	35.35	11.85	47.20	68.20	-21.00	peak
2	15630.000	34.67	14.33	49.00	74.00	-25.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

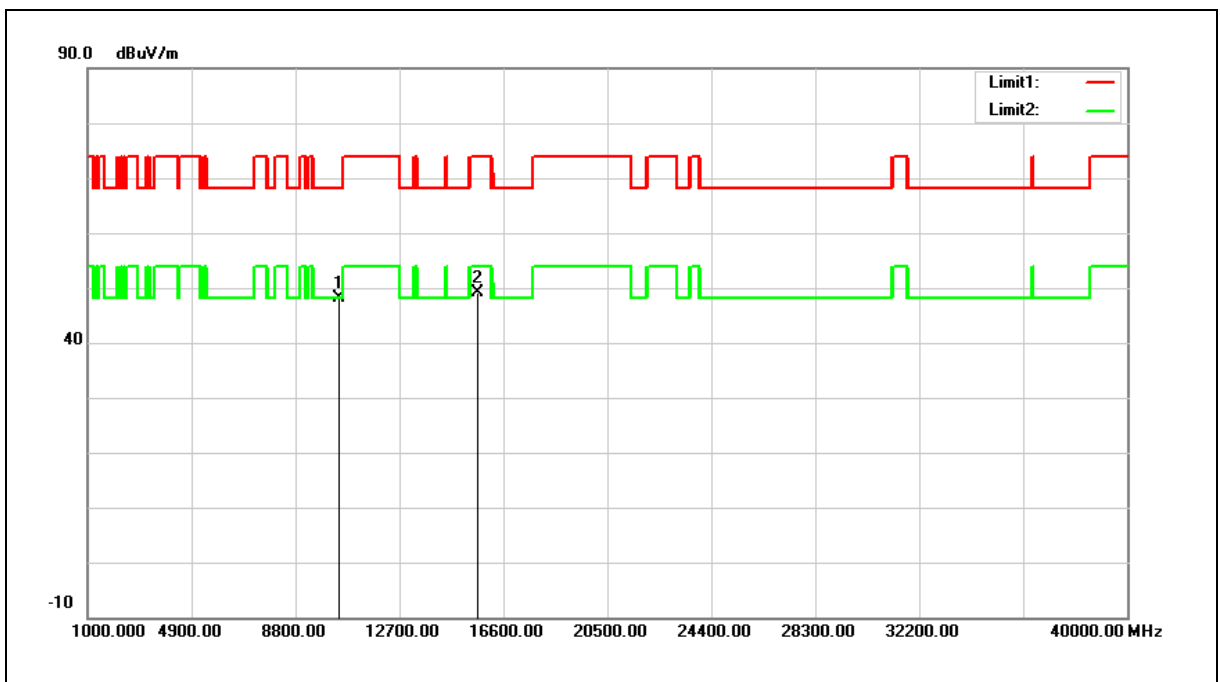


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.23	11.85	48.08	68.20	-20.12	peak
2	15630.000	34.91	14.33	49.24	74.00	-24.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

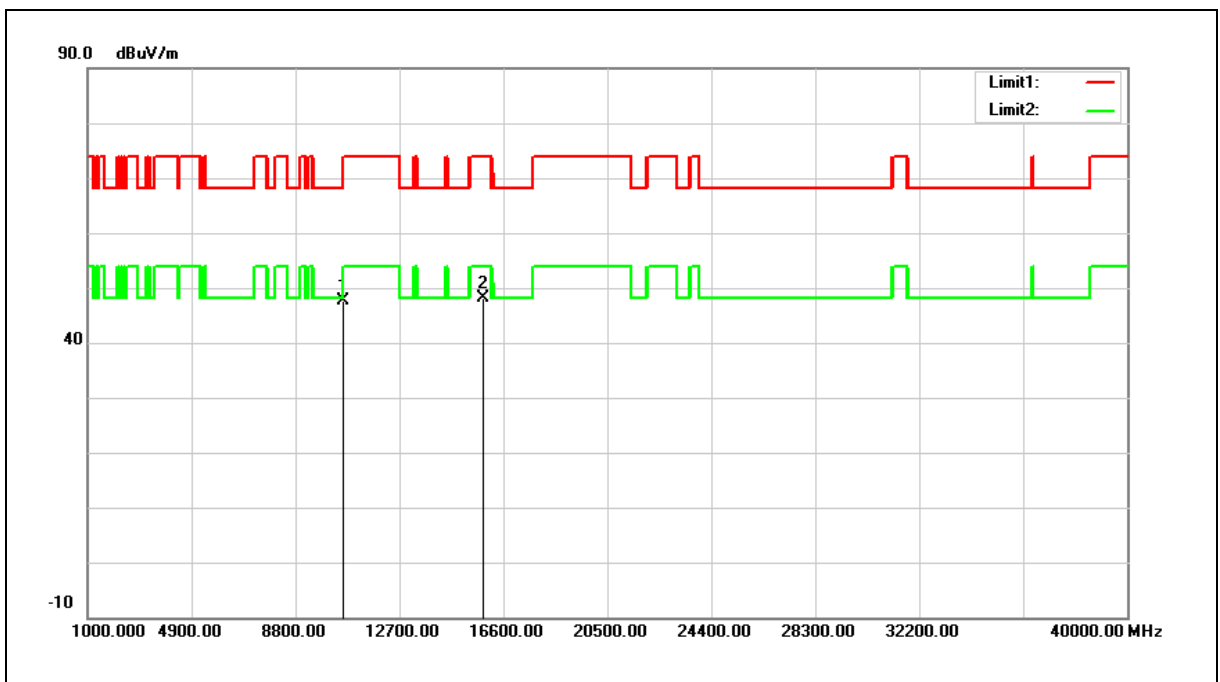


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	35.63	12.10	47.73	68.20	-20.47	peak
2	15870.000	34.38	13.82	48.20	74.00	-25.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

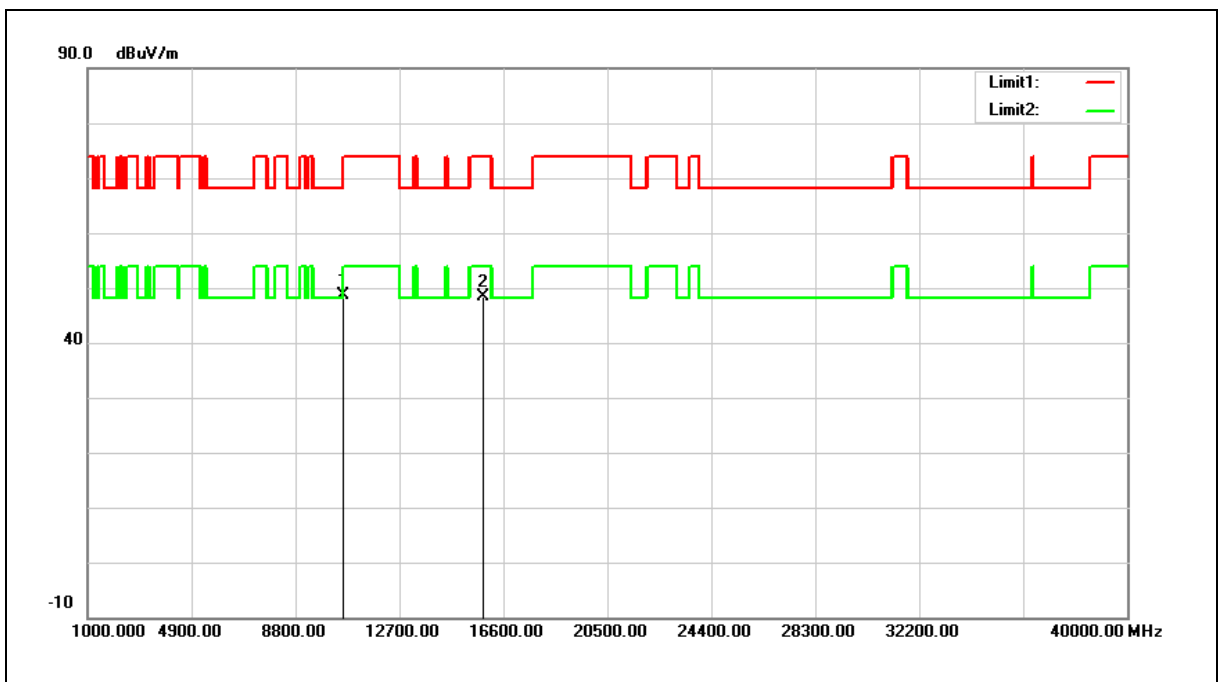


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	36.52	12.10	48.62	68.20	-19.58	peak
2	15870.000	34.67	13.82	48.49	74.00	-25.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

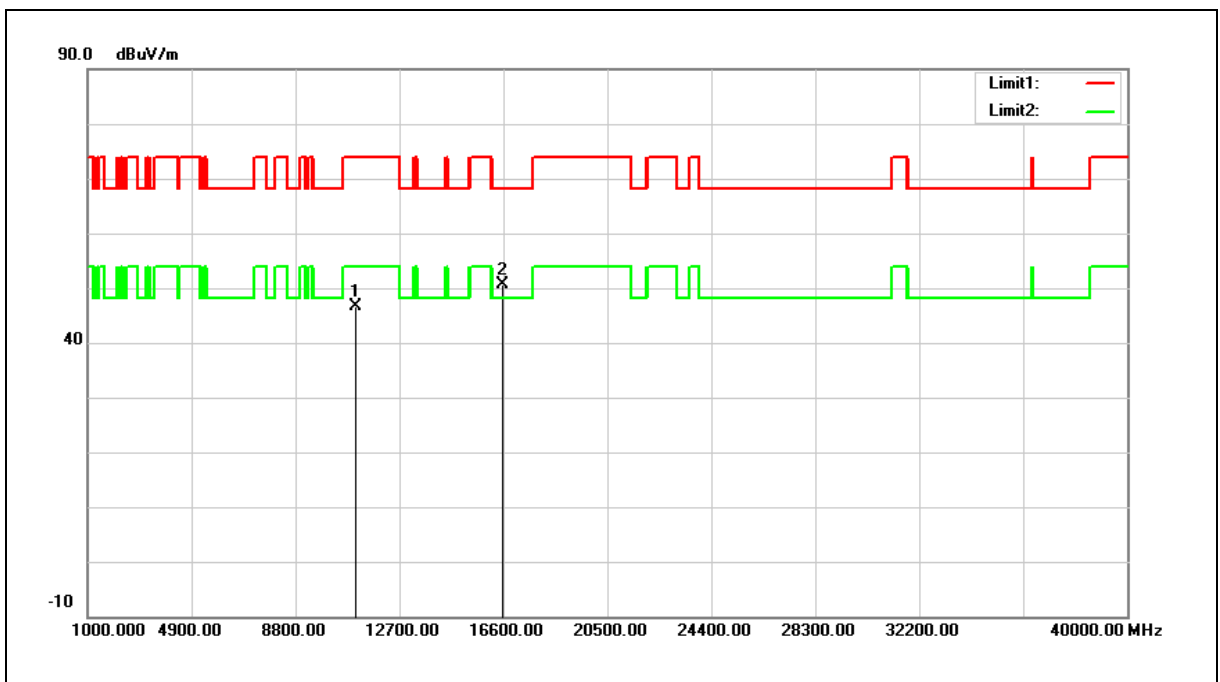


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	34.17	12.43	46.60	74.00	-27.40	peak
2	16590.000	35.98	14.73	50.71	68.20	-17.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

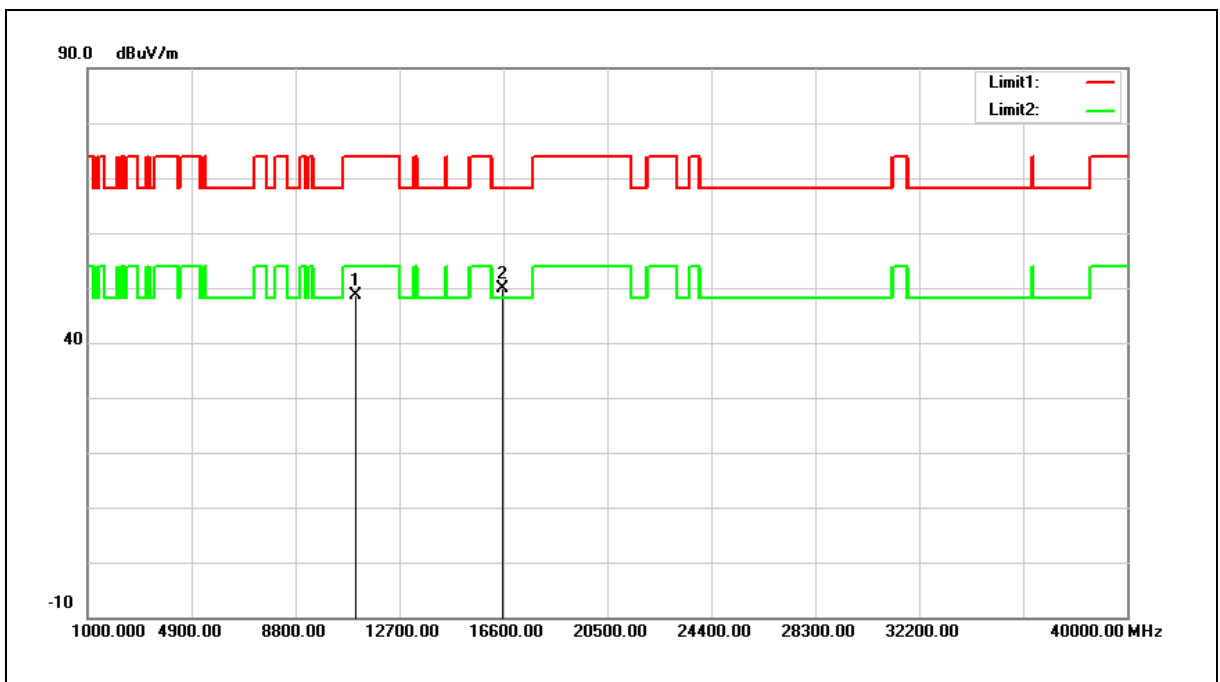


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	36.09	12.43	48.52	74.00	-25.48	peak
2	16590.000	35.06	14.73	49.79	68.20	-18.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

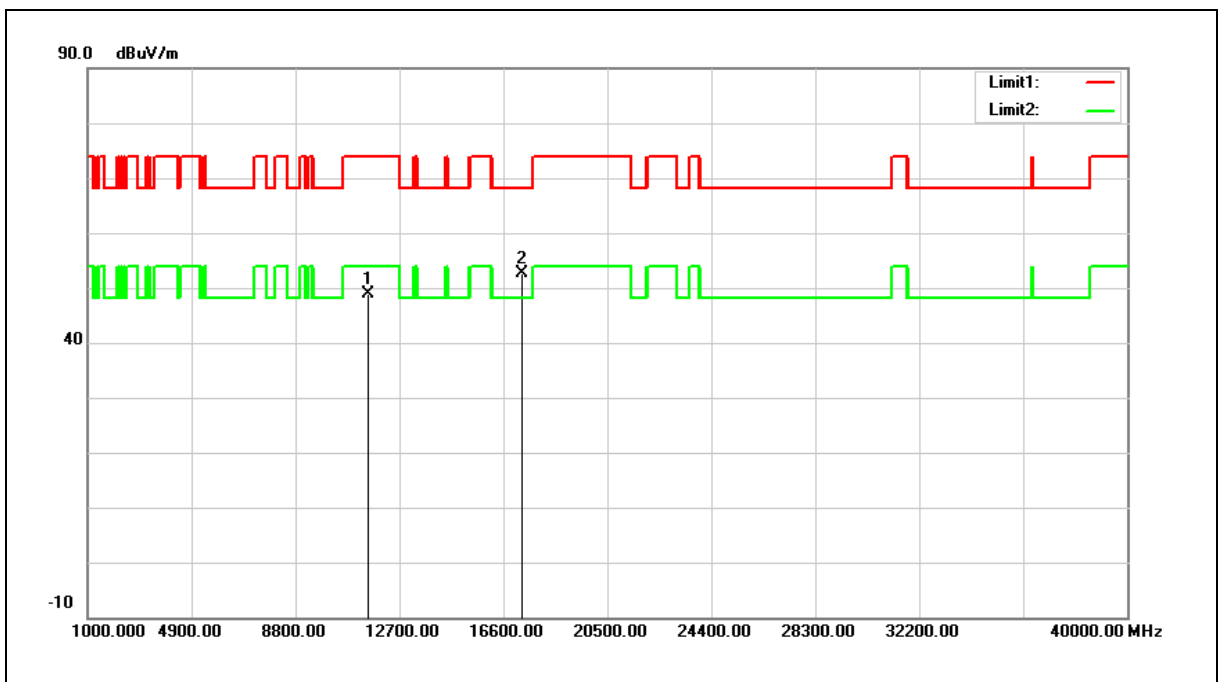


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	36.18	12.62	48.80	74.00	-25.20	peak
2	17325.000	33.49	19.12	52.61	68.20	-15.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

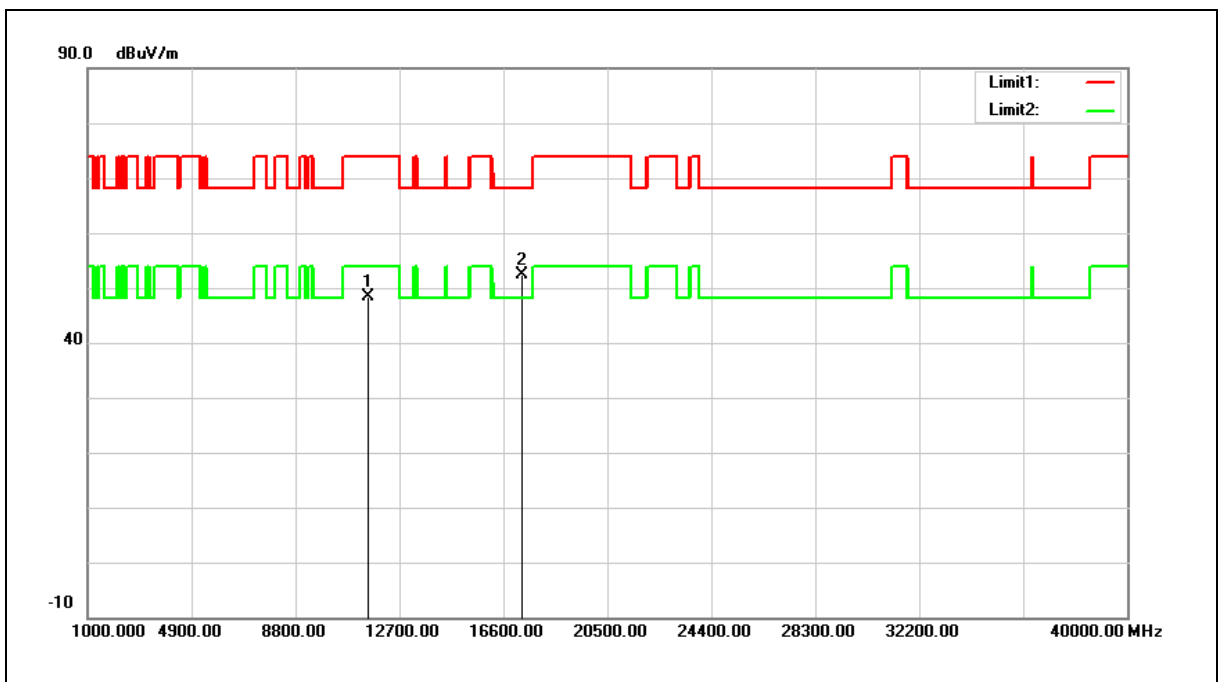


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.79	12.62	48.41	74.00	-25.59	peak
2	17325.000	33.33	19.12	52.45	68.20	-15.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

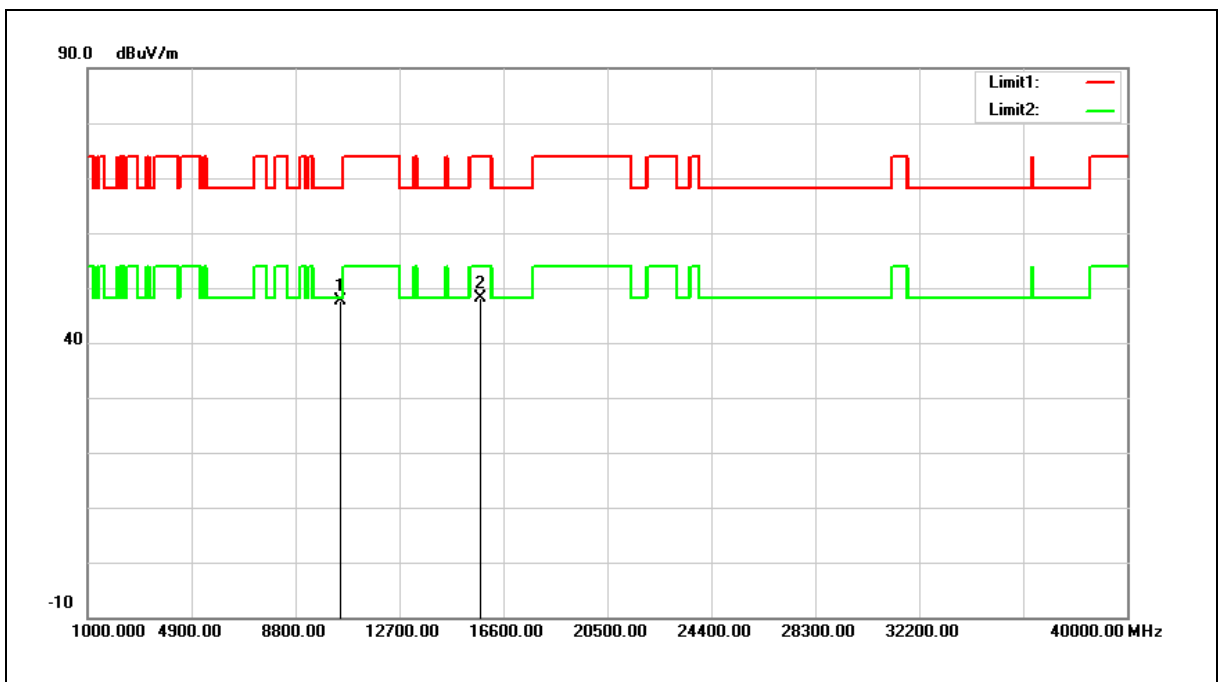


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	35.50	12.05	47.55	68.20	-20.65	peak
2	15750.000	34.04	14.08	48.12	74.00	-25.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

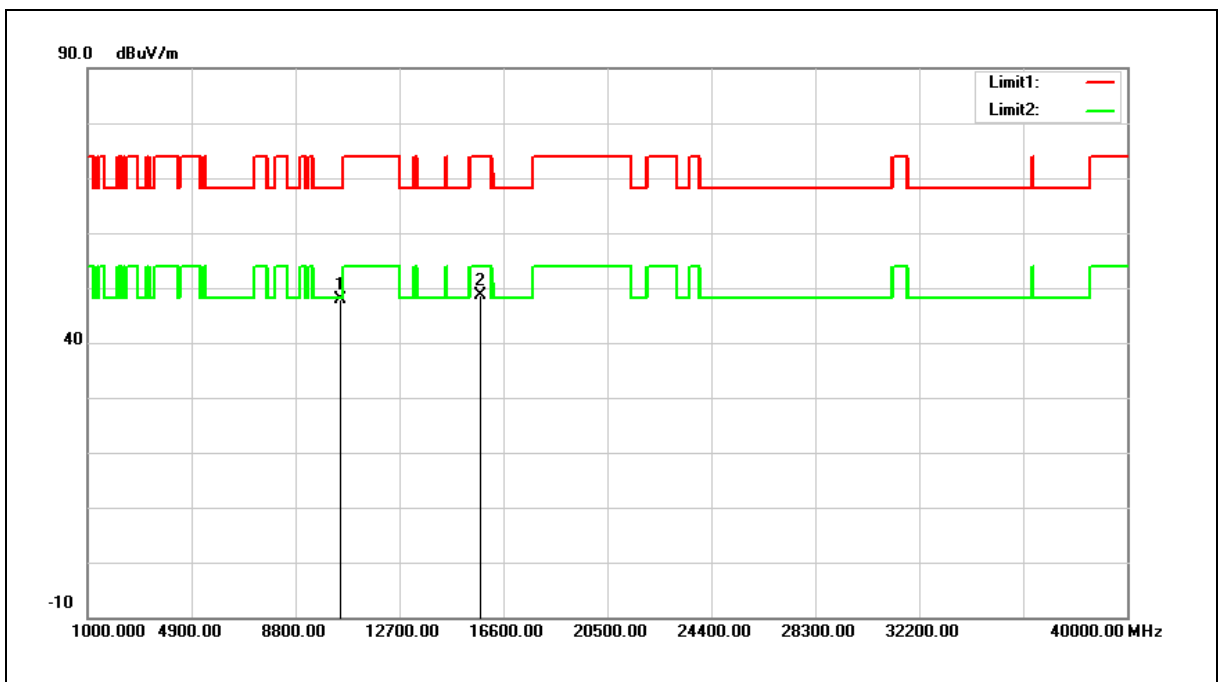


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	35.92	12.05	47.97	68.20	-20.23	peak
2	15750.000	34.49	14.08	48.57	74.00	-25.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 5 GHz)		
Ant.Polar.:	Horizontal		

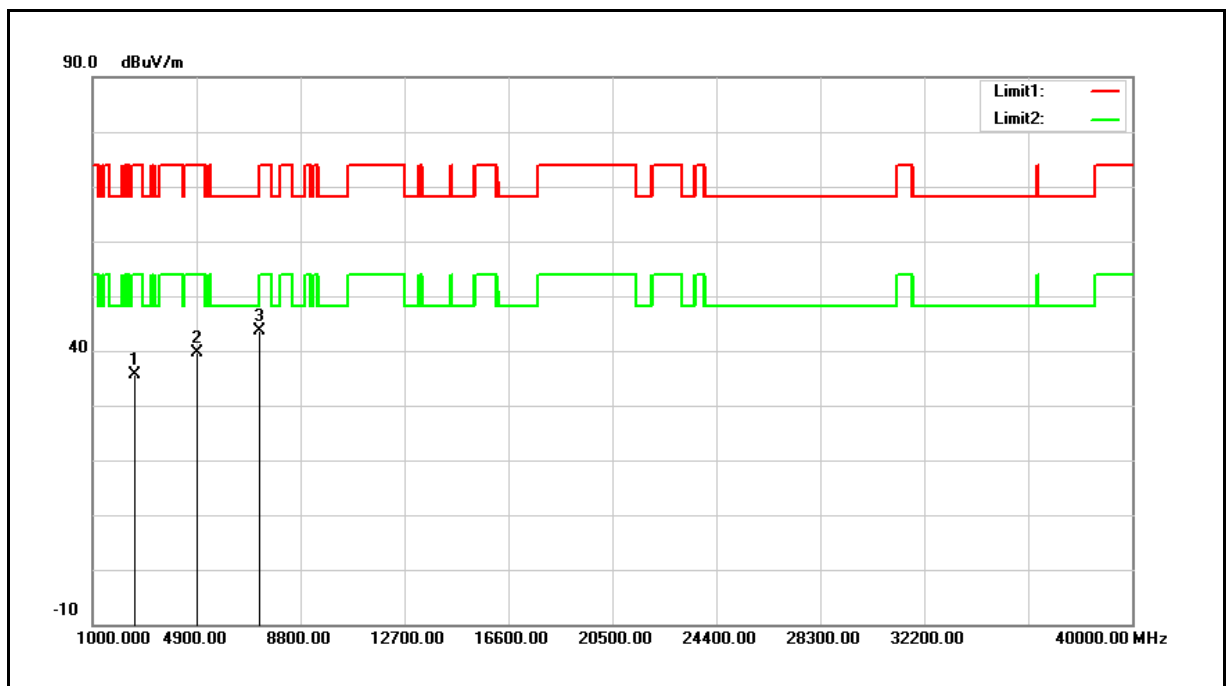


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2547.000	42.61	-7.08	35.53	74.00	-38.47	peak
2	4893.000	40.66	-1.06	39.60	74.00	-34.40	peak
3	7273.000	37.67	5.98	43.65	74.00	-30.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 5 GHz)		
Ant.Polar.:	Vertical		

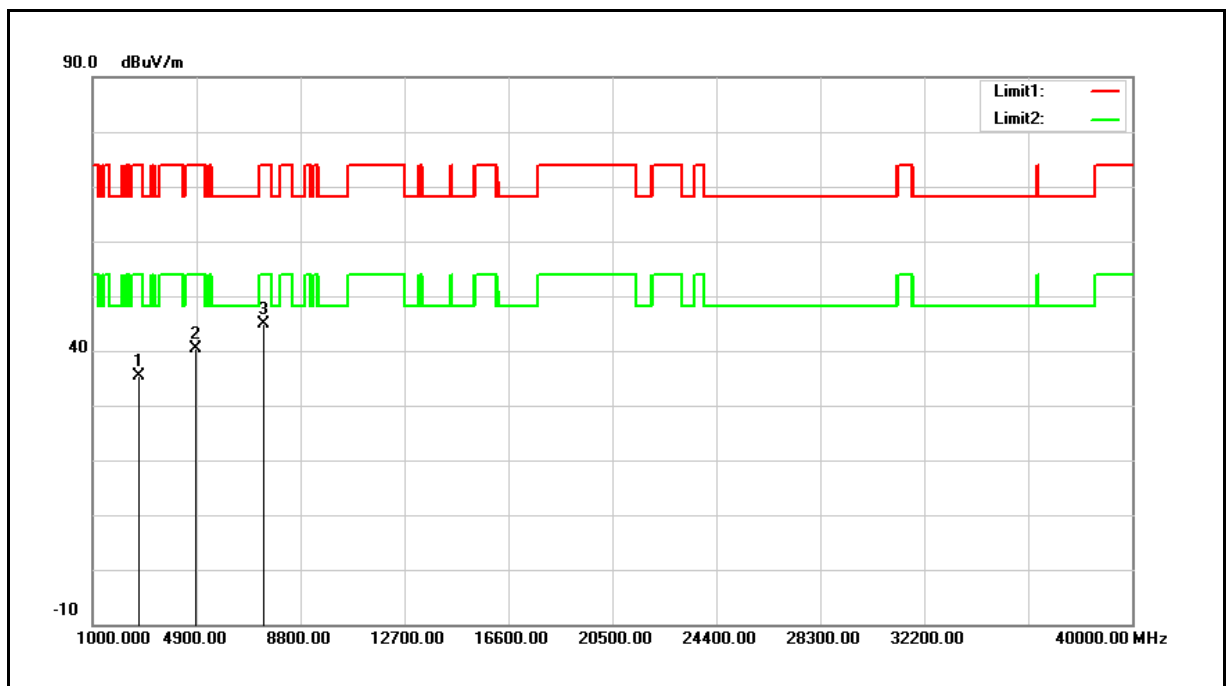


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	41.86	-6.39	35.47	74.00	-38.53	peak
2	4825.000	41.71	-1.24	40.47	74.00	-33.53	peak
3	7426.000	38.43	6.52	44.95	74.00	-29.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 2.4 GHz + WLAN 5 GHz)		
Ant.Polar.:	Horizontal		

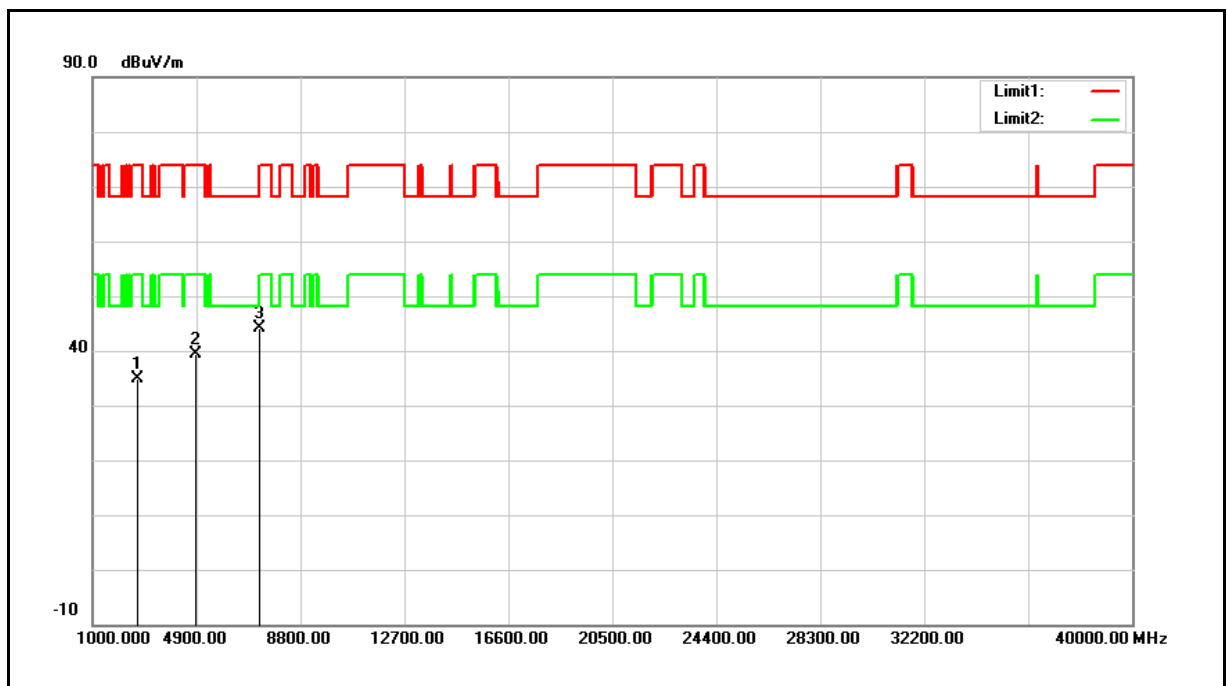


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2649.000	41.64	-6.66	34.98	74.00	-39.02	peak
2	4825.000	40.63	-1.24	39.39	74.00	-34.61	peak
3	7256.000	38.11	5.92	44.03	74.00	-29.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 2.4 GHz + WLAN 5 GHz)		
Ant.Polar.:	Vertical		

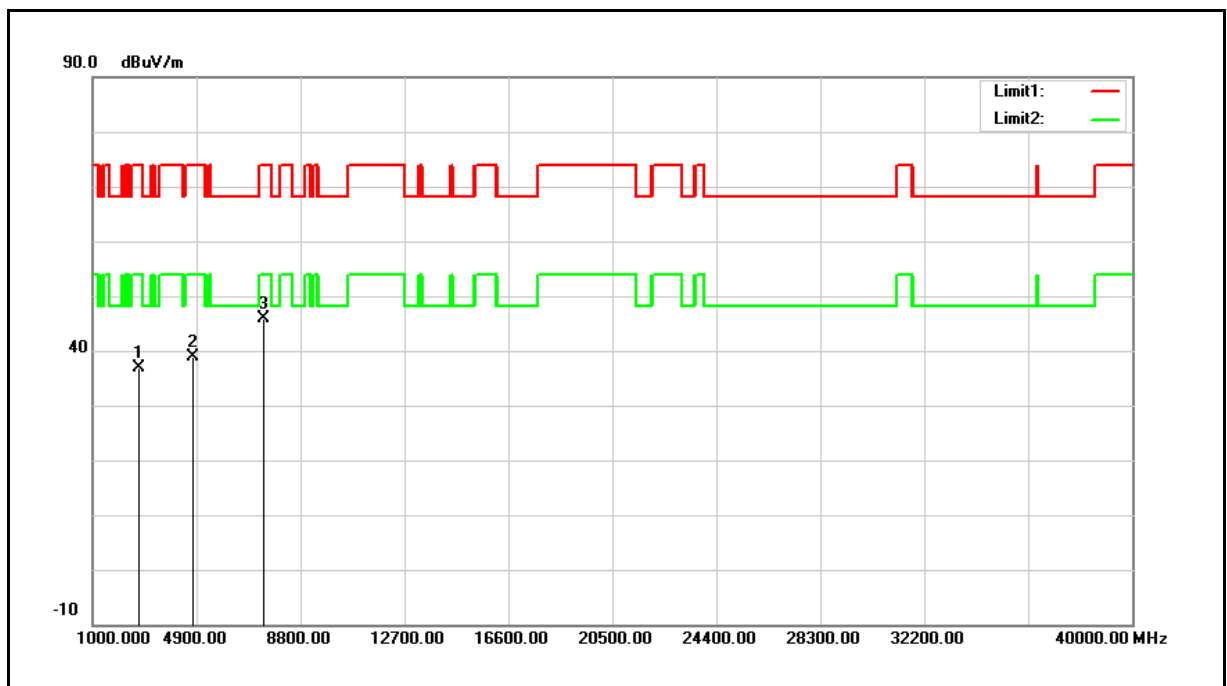


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	43.32	-6.39	36.93	74.00	-37.07	peak
2	4757.000	40.40	-1.44	38.96	74.00	-35.04	peak
3	7392.000	39.48	6.40	45.88	74.00	-28.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 19		
Ant.Polar.:	Horizontal		
Description:			

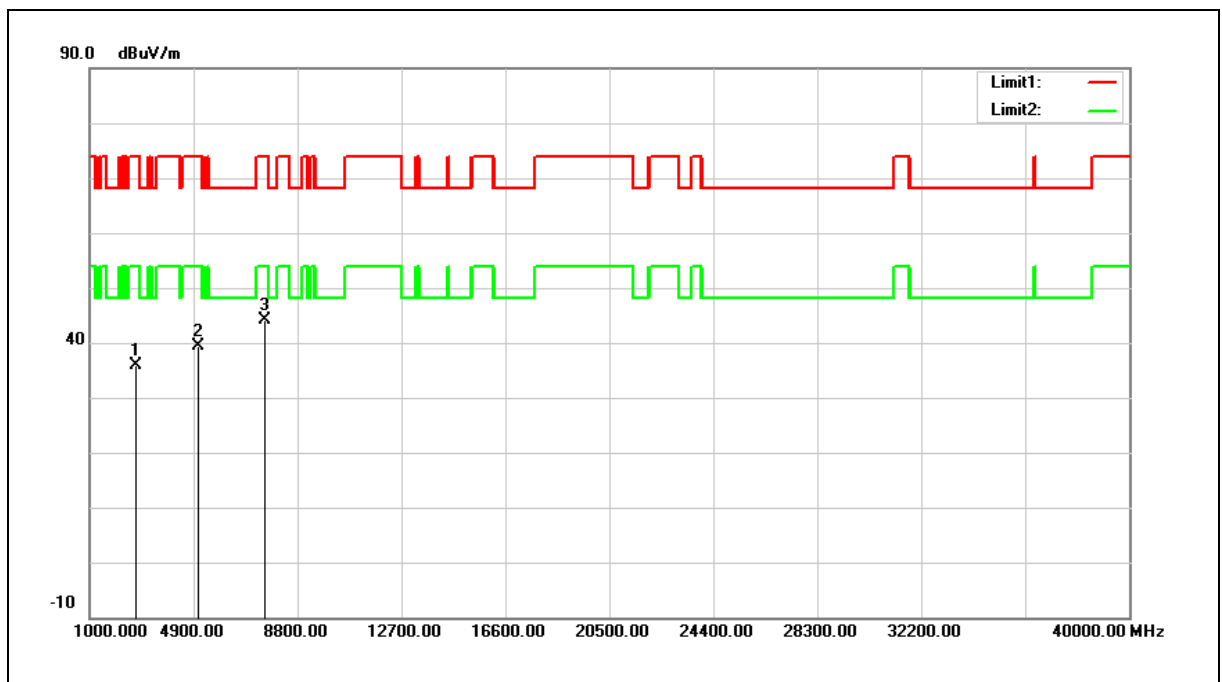


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2683.000	42.48	-6.53	35.95	74.00	-38.05	peak
2	5046.000	40.13	-0.68	39.45	74.00	-34.55	peak
3	7579.000	37.32	6.88	44.20	74.00	-29.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 19		
Ant.Polar.:	Vertical		
Description:			

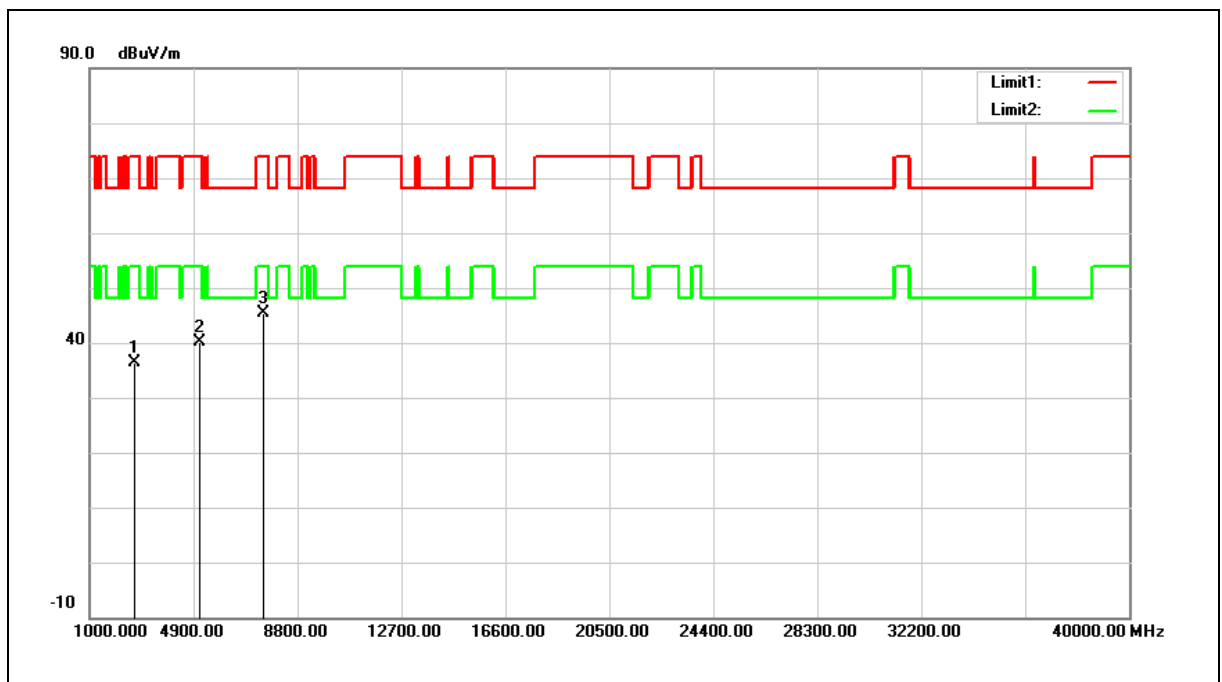

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2649.000	43.06	-6.66	36.40	74.00	-37.60	peak
2	5097.000	40.60	-0.57	40.03	74.00	-33.97	peak
3	7511.000	38.68	6.79	45.47	74.00	-28.53	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

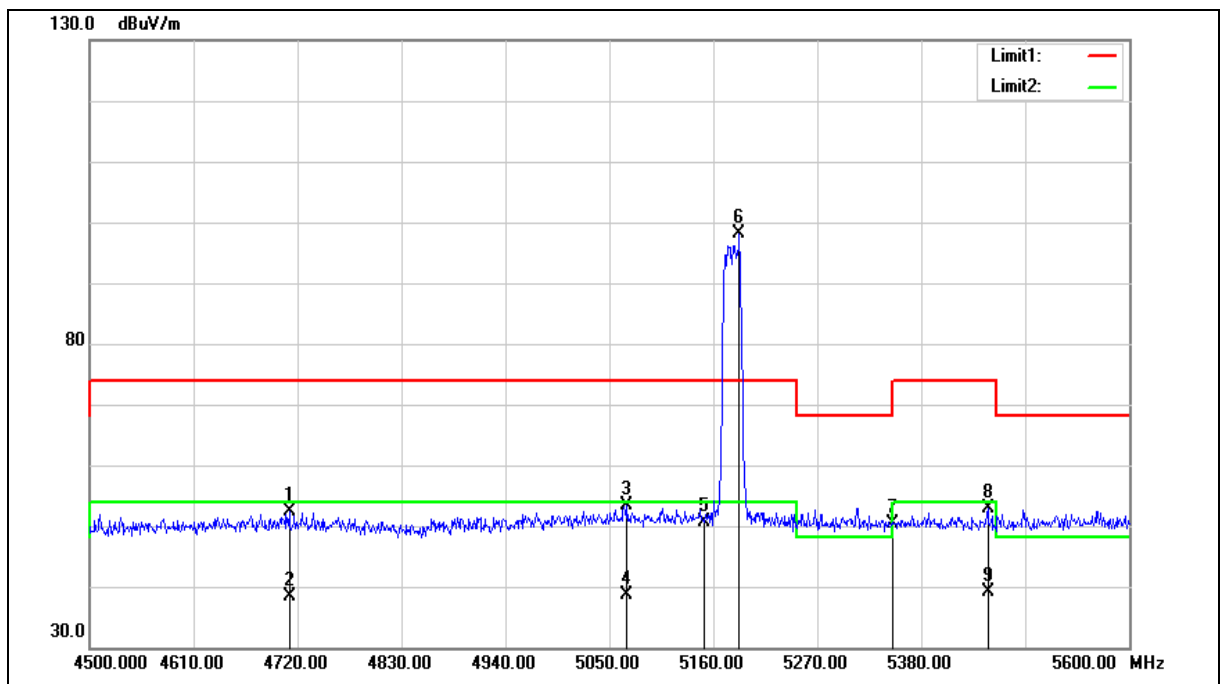

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4711.200	53.98	-1.57	52.41	74.00	-21.59	peak
2	4711.200	39.90	-1.57	38.33	54.00	-15.67	AVG
3	5068.700	54.01	-0.64	53.37	74.00	-20.63	peak
4	5068.700	39.19	-0.64	38.55	54.00	-15.45	AVG
5	5150.000	51.19	-0.48	50.71	74.00	-23.29	peak
6	5187.500	98.57	-0.40	98.17	--	--	peak
7	5350.000	50.42	-0.08	50.34	74.00	-23.66	peak
8	5450.400	52.66	0.12	52.78	74.00	-21.22	peak
9	5450.400	39.10	0.12	39.22	54.00	-14.78	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

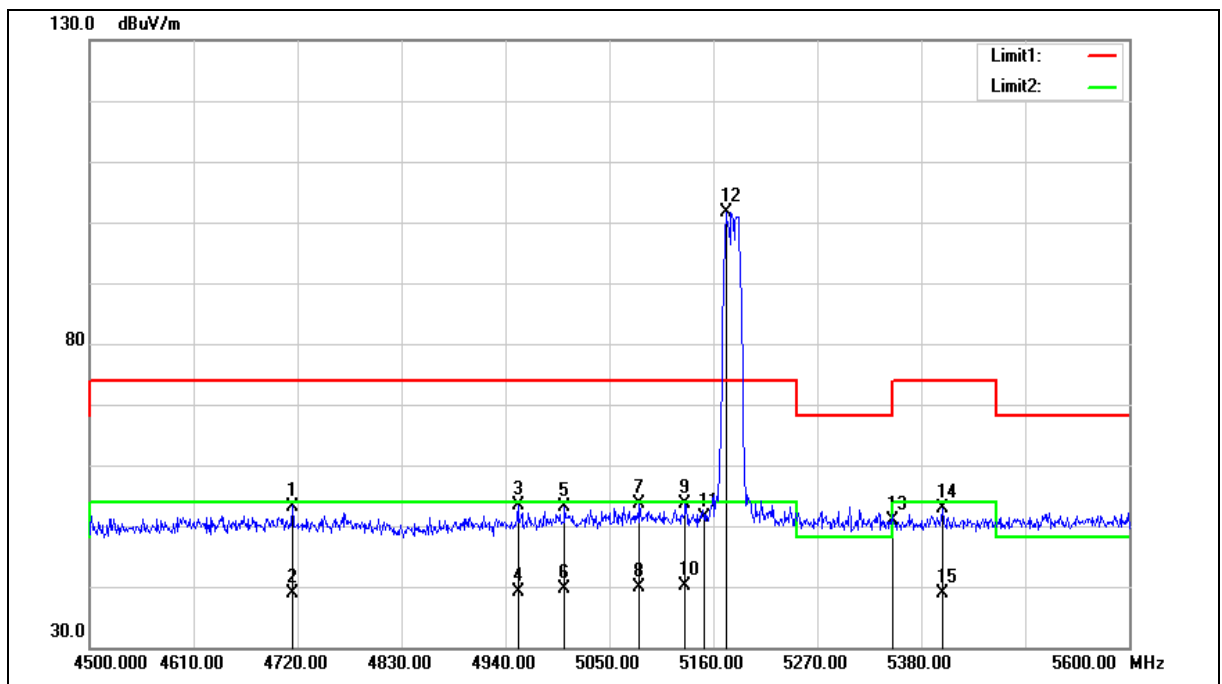

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4714.500	54.80	-1.55	53.25	74.00	-20.75	peak
2	4714.500	40.31	-1.55	38.76	54.00	-15.24	AVG
3	4953.200	54.23	-0.89	53.34	74.00	-20.66	peak
4	4953.200	40.14	-0.89	39.25	54.00	-14.75	AVG
5	5002.700	53.78	-0.77	53.01	74.00	-20.99	peak
6	5002.700	40.45	-0.77	39.68	54.00	-14.32	AVG
7	5081.900	54.29	-0.60	53.69	74.00	-20.31	peak
8	5081.900	40.57	-0.60	39.97	54.00	-14.03	AVG
9	5130.300	54.10	-0.52	53.58	74.00	-20.42	peak
10	5130.300	40.63	-0.52	40.11	54.00	-13.89	AVG
11	5150.000	51.75	-0.48	51.27	74.00	-22.73	peak
12	5173.200	102.07	-0.43	101.64	--	--	peak
13	5350.000	50.84	-0.08	50.76	74.00	-23.24	peak
14	5403.100	52.96	0.02	52.98	74.00	-21.02	peak
15	5403.100	38.91	0.02	38.93	54.00	-15.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

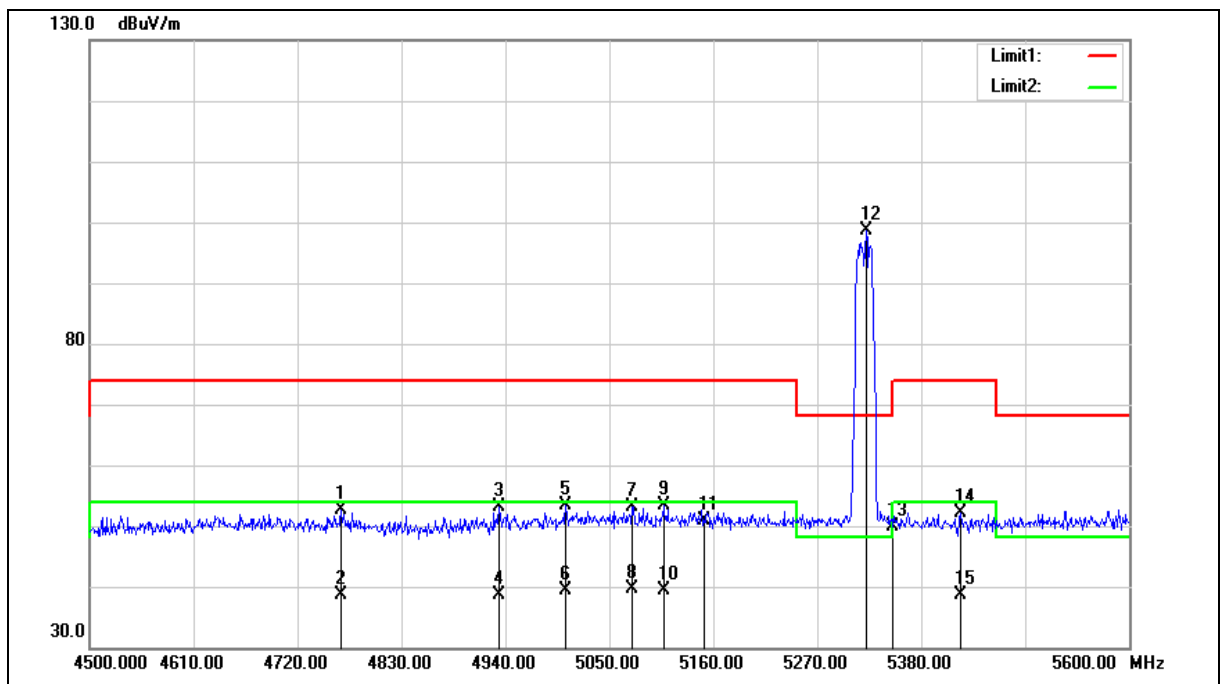

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4766.200	54.04	-1.41	52.63	74.00	-21.37	peak
2	4766.200	40.00	-1.41	38.59	54.00	-15.41	AVG
3	4933.400	54.08	-0.95	53.13	74.00	-20.87	peak
4	4933.400	39.65	-0.95	38.70	54.00	-15.30	AVG
5	5003.800	54.06	-0.77	53.29	74.00	-20.71	peak
6	5003.800	40.04	-0.77	39.27	54.00	-14.73	AVG
7	5074.200	53.85	-0.62	53.23	74.00	-20.77	peak
8	5074.200	40.30	-0.62	39.68	54.00	-14.32	AVG
9	5107.200	53.87	-0.56	53.31	74.00	-20.69	peak
10	5107.200	39.85	-0.56	39.29	54.00	-14.71	AVG
11	5150.000	51.45	-0.48	50.97	74.00	-23.03	peak
12	5321.700	98.71	-0.14	98.57	--	--	peak
13	5350.000	49.96	-0.08	49.88	74.00	-24.12	peak
14	5421.800	52.16	0.06	52.22	74.00	-21.78	peak
15	5421.800	38.66	0.06	38.72	54.00	-15.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

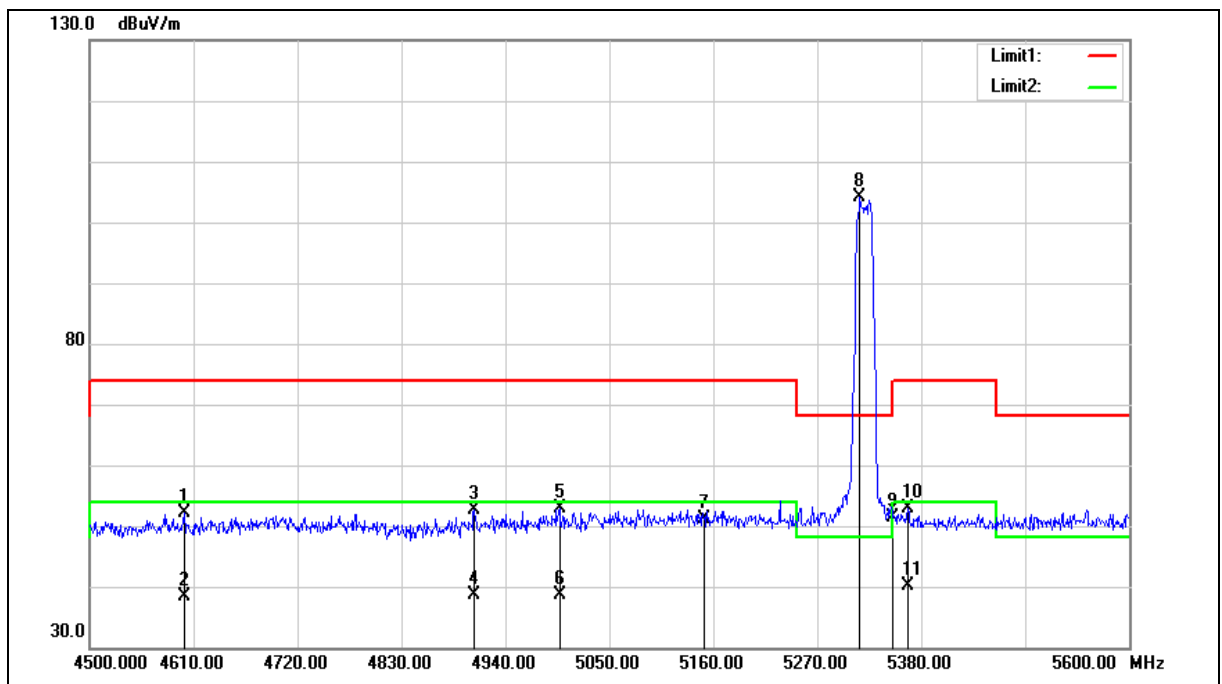

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4600.100	54.07	-1.87	52.20	74.00	-21.80	peak
2	4600.100	40.28	-1.87	38.41	54.00	-15.59	AVG
3	4907.000	53.53	-1.02	52.51	74.00	-21.49	peak
4	4907.000	39.57	-1.02	38.55	54.00	-15.45	AVG
5	4997.200	53.64	-0.78	52.86	74.00	-21.14	peak
6	4997.200	39.50	-0.78	38.72	54.00	-15.28	AVG
7	5150.000	51.63	-0.48	51.15	74.00	-22.85	peak
8	5315.100	104.29	-0.15	104.14	--	--	peak
9	5350.000	51.48	-0.08	51.40	74.00	-22.60	peak
10	5365.700	53.03	-0.05	52.98	74.00	-21.02	peak
11	5365.700	40.12	-0.05	40.07	54.00	-13.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5216.000	52.28	-0.35	51.93	74.00	-22.07	peak
2	5420.000	52.78	0.06	52.84	74.00	-21.16	peak
3	5420.000	39.56	0.06	39.62	54.00	-14.38	AVG
4	5452.800	53.02	0.12	53.14	74.00	-20.86	peak
5	5452.800	40.29	0.12	40.41	54.00	-13.59	AVG
6	5460.000	49.84	0.14	49.98	74.00	-24.02	peak
7	5470.000	51.67	0.16	51.83	68.20	-16.37	peak
8	5502.400	103.48	0.22	103.70	--	--	peak
9	5725.000	49.04	0.82	49.86	68.20	-18.34	peak
10	5981.600	52.62	1.52	54.14	68.20	-14.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

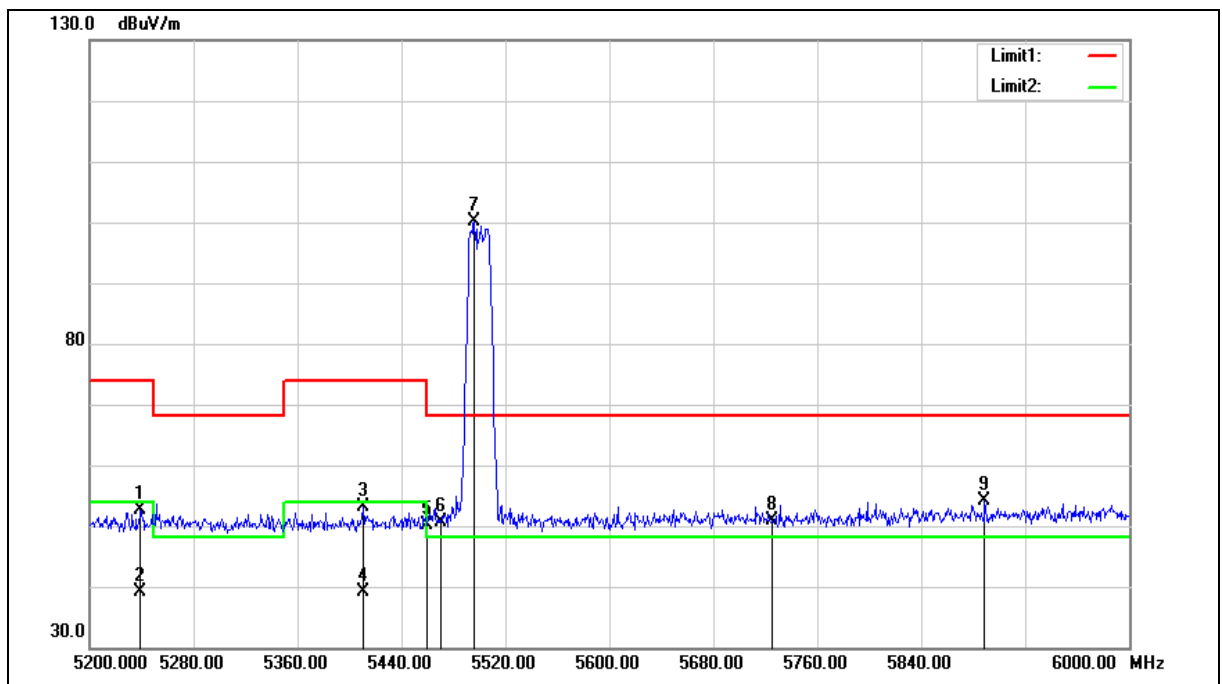

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5239.200	52.95	-0.30	52.65	74.00	-21.35	peak
2	5239.200	39.31	-0.30	39.01	54.00	-14.99	AVG
3	5410.400	53.01	0.04	53.05	74.00	-20.95	peak
4	5410.400	39.18	0.04	39.22	54.00	-14.78	AVG
5	5460.000	49.87	0.14	50.01	74.00	-23.99	peak
6	5470.000	50.38	0.16	50.54	68.20	-17.66	peak
7	5496.000	99.87	0.21	100.08	--	--	peak
8	5725.000	50.06	0.82	50.88	68.20	-17.32	peak
9	5888.800	52.83	1.26	54.09	68.20	-14.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

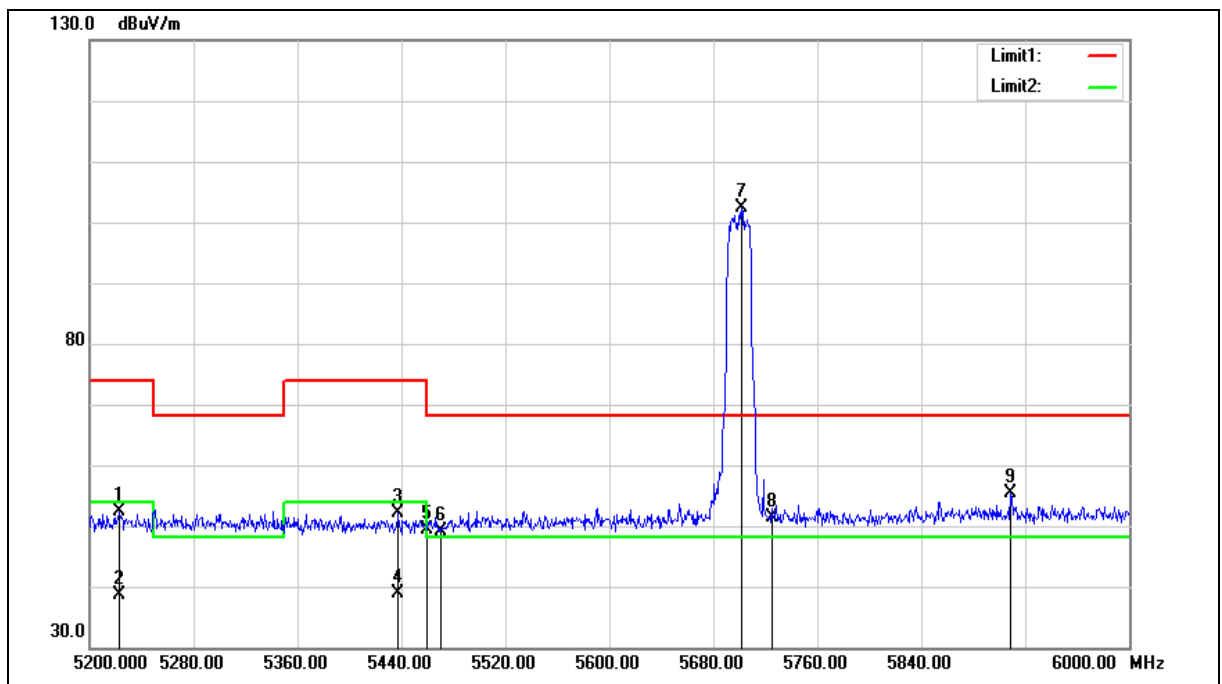

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5223.200	52.75	-0.33	52.42	74.00	-21.58	peak
2	5223.200	39.00	-0.33	38.67	54.00	-15.33	AVG
3	5437.600	52.09	0.09	52.18	74.00	-21.82	peak
4	5437.600	38.80	0.09	38.89	54.00	-15.11	AVG
5	5460.000	49.29	0.14	49.43	74.00	-24.57	peak
6	5470.000	48.98	0.16	49.14	68.20	-19.06	peak
7	5701.600	101.54	0.75	102.29	--	--	peak
8	5725.000	50.45	0.82	51.27	68.20	-16.93	peak
9	5908.800	54.15	1.32	55.47	68.20	-12.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

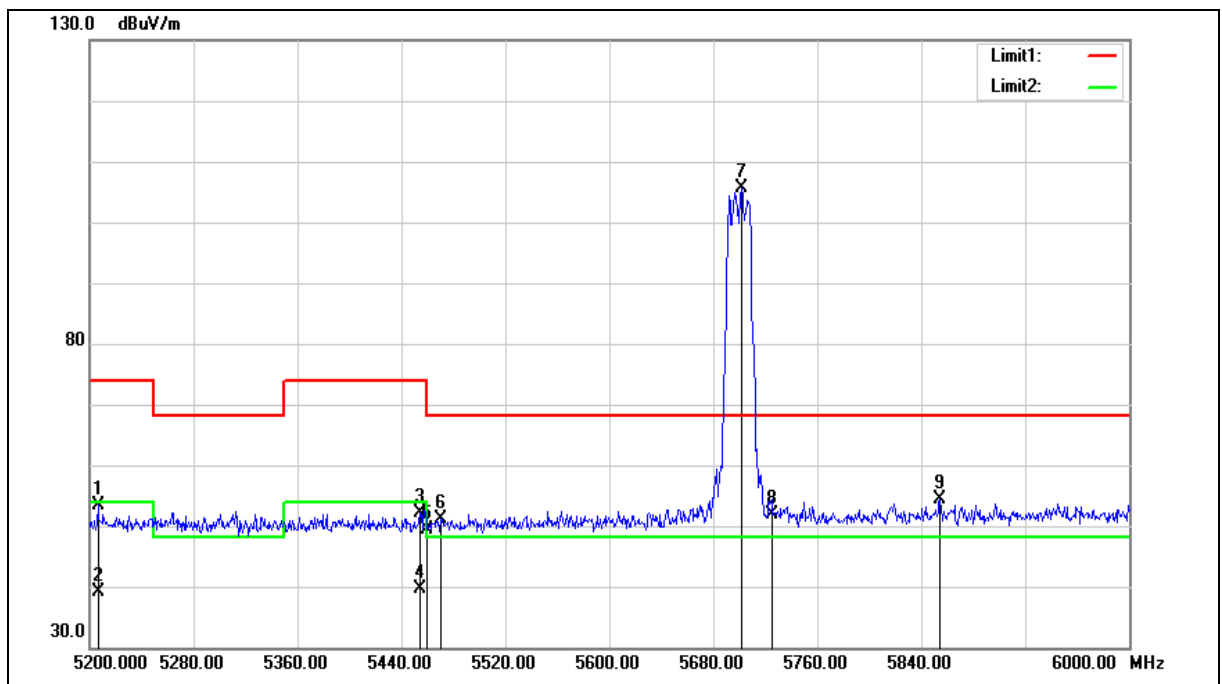

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5206.400	53.86	-0.36	53.50	74.00	-20.50	peak
2	5206.400	39.60	-0.36	39.24	54.00	-14.76	AVG
3	5454.400	51.92	0.12	52.04	74.00	-21.96	peak
4	5454.400	39.44	0.12	39.56	54.00	-14.44	AVG
5	5460.000	49.24	0.14	49.38	74.00	-24.62	peak
6	5470.000	50.90	0.16	51.06	68.20	-17.14	peak
7	5701.600	104.76	0.75	105.51	--	--	peak
8	5725.000	51.06	0.82	51.88	68.20	-16.32	peak
9	5854.400	53.14	1.18	54.32	68.20	-13.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

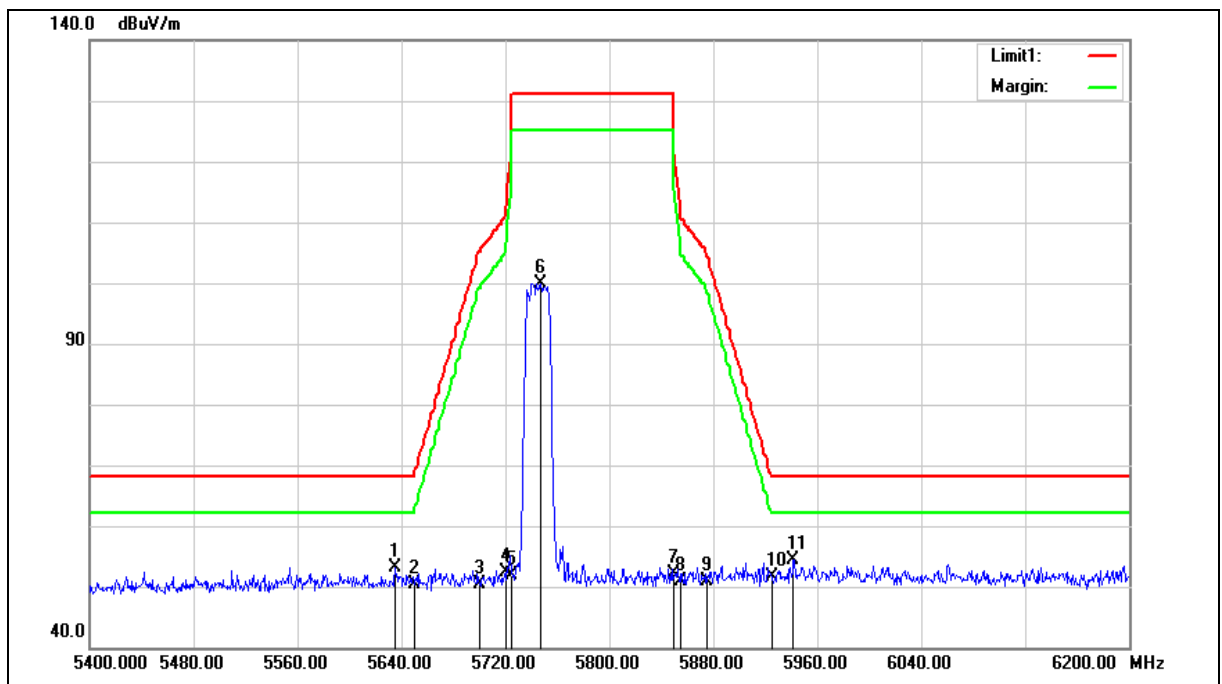

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5635.200	52.53	0.59	53.12	68.20	-15.08	peak
2	5650.000	49.83	0.62	50.45	68.20	-17.75	peak
3	5700.000	49.70	0.75	50.45	105.20	-54.75	peak
4	5720.000	51.64	0.81	52.45	110.80	-58.35	peak
5	5725.000	51.05	0.82	51.87	122.20	-70.33	peak
6	5747.200	99.10	0.89	99.99	--	--	peak
7	5850.000	50.91	1.17	52.08	122.20	-70.12	peak
8	5855.000	49.68	1.18	50.86	110.80	-59.94	peak
9	5875.000	49.67	1.23	50.90	105.20	-54.30	peak
10	5925.000	50.36	1.37	51.73	68.20	-16.47	peak
11	5941.600	53.07	1.42	54.49	68.20	-13.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

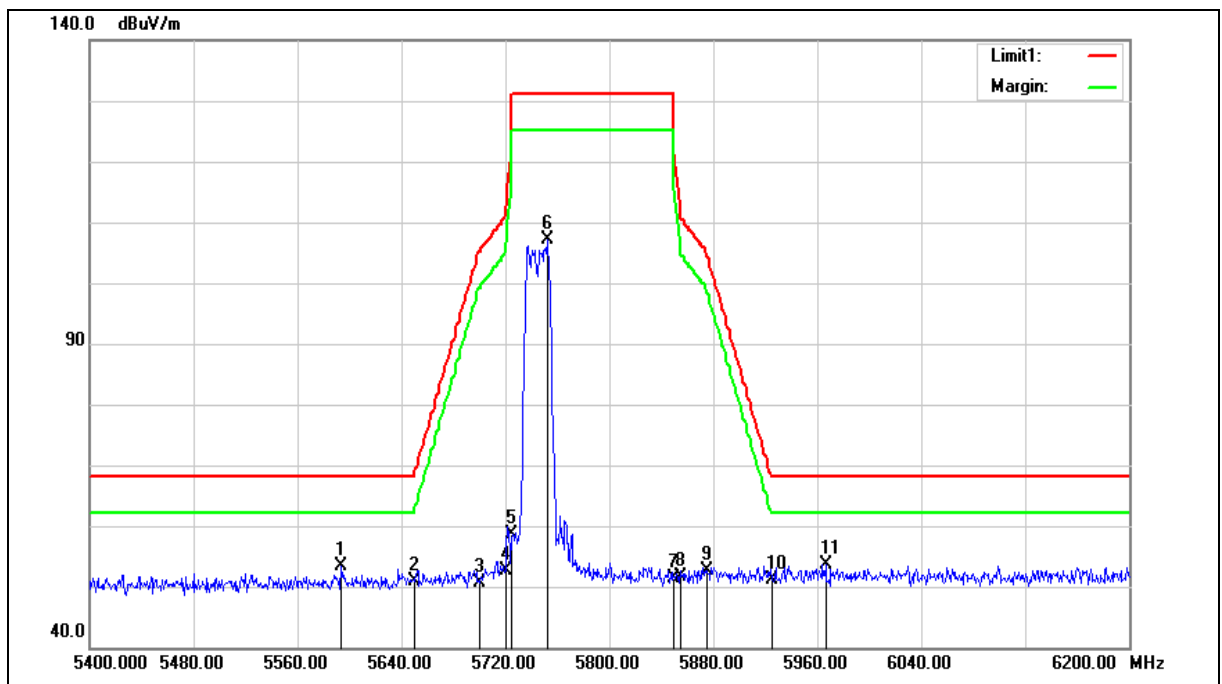

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5593.600	52.88	0.47	53.35	68.20	-14.85	peak
2	5650.000	50.28	0.62	50.90	68.20	-17.30	peak
3	5700.000	49.95	0.75	50.70	105.20	-54.50	peak
4	5720.000	51.88	0.81	52.69	110.80	-58.11	peak
5	5725.000	57.90	0.82	58.72	122.20	-63.48	peak
6	5752.000	106.29	0.90	107.19	--	--	peak
7	5850.000	50.29	1.17	51.46	122.20	-70.74	peak
8	5855.000	50.54	1.18	51.72	110.80	-59.08	peak
9	5875.000	51.46	1.23	52.69	105.20	-52.51	peak
10	5925.000	49.85	1.37	51.22	68.20	-16.98	peak
11	5966.400	52.21	1.49	53.70	68.20	-14.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

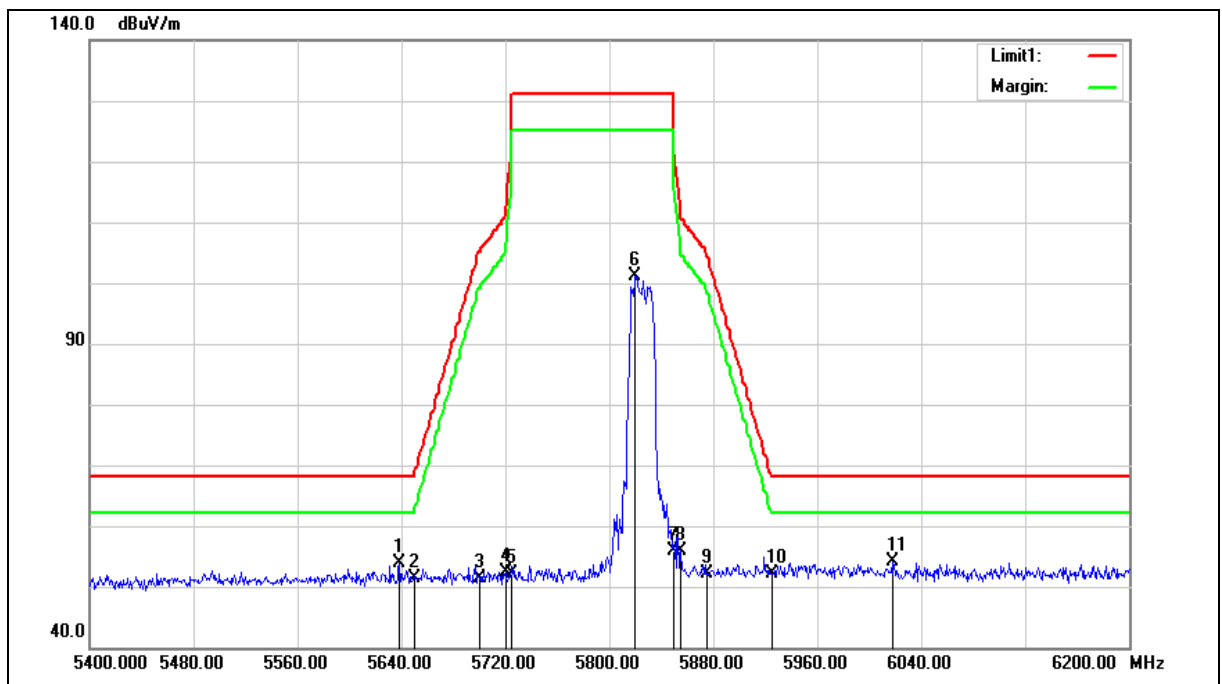

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5638.400	53.18	0.59	53.77	68.20	-14.43	peak
2	5650.000	50.65	0.62	51.27	68.20	-16.93	peak
3	5700.000	50.62	0.75	51.37	105.20	-53.83	peak
4	5720.000	51.46	0.81	52.27	110.80	-58.53	peak
5	5725.000	51.23	0.82	52.05	122.20	-70.15	peak
6	5820.000	100.14	1.08	101.22	--	--	peak
7	5850.000	54.83	1.17	56.00	122.20	-66.20	peak
8	5855.000	54.66	1.18	55.84	110.80	-54.96	peak
9	5875.000	51.00	1.23	52.23	105.20	-52.97	peak
10	5925.000	50.65	1.37	52.02	68.20	-16.18	peak
11	6017.600	52.46	1.63	54.09	68.20	-14.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

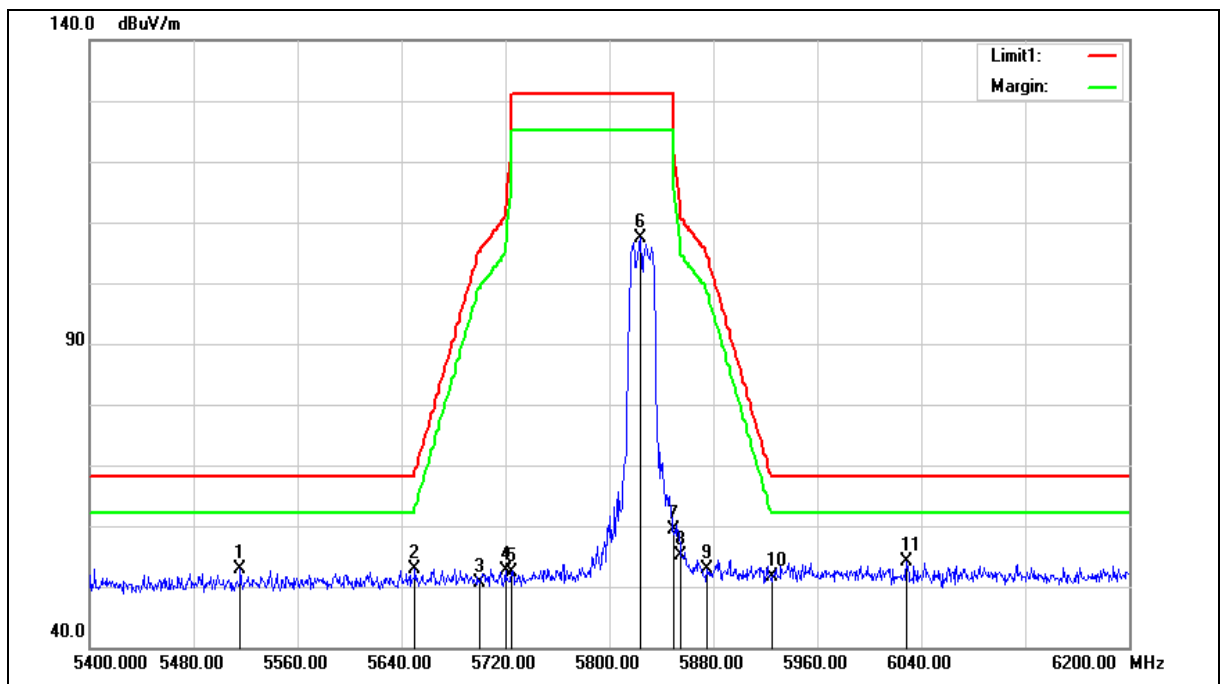

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5516.000	52.71	0.27	52.98	68.20	-15.22	peak
2	5650.000	52.25	0.62	52.87	68.20	-15.33	peak
3	5700.000	49.79	0.75	50.54	105.20	-54.66	peak
4	5720.000	51.74	0.81	52.55	110.80	-58.25	peak
5	5725.000	51.68	0.82	52.50	122.20	-69.70	peak
6	5824.000	106.32	1.10	107.42	--	--	peak
7	5850.000	58.12	1.17	59.29	122.20	-62.91	peak
8	5855.000	53.85	1.18	55.03	110.80	-55.77	peak
9	5875.000	51.70	1.23	52.93	105.20	-52.27	peak
10	5925.000	50.26	1.37	51.63	68.20	-16.57	peak
11	6028.800	52.41	1.67	54.08	68.20	-14.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

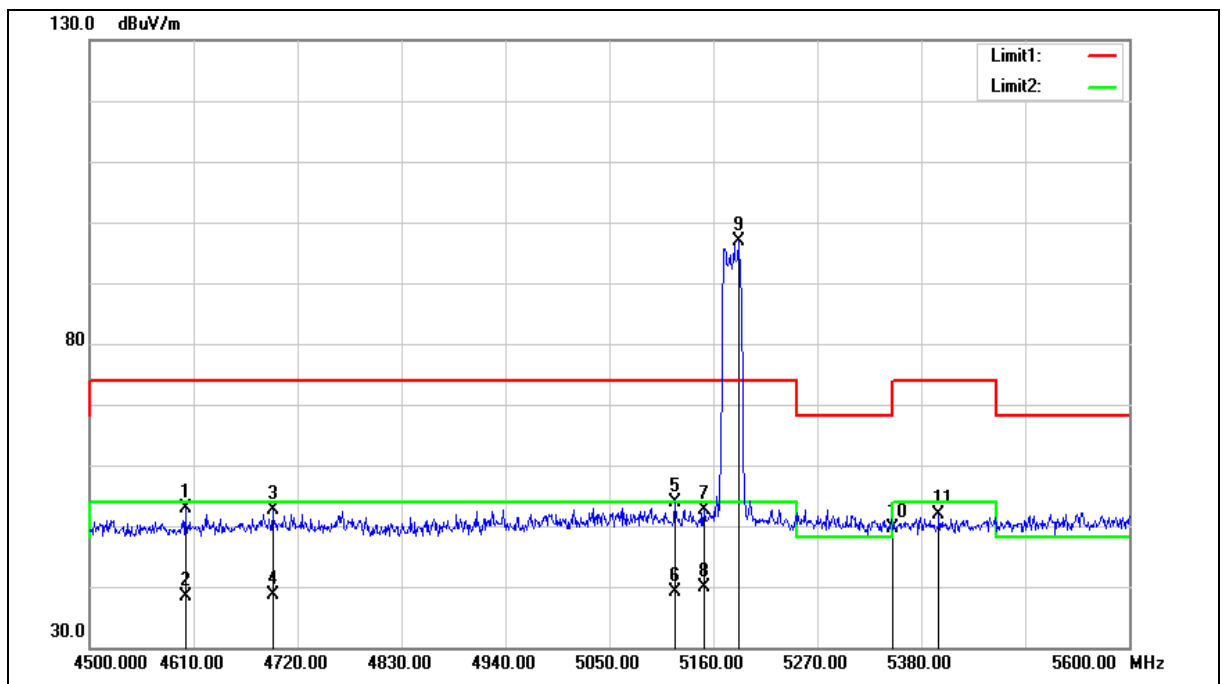

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4601.200	54.69	-1.87	52.82	74.00	-21.18	peak
2	4601.200	40.15	-1.87	38.28	54.00	-15.72	AVG
3	4693.600	54.22	-1.61	52.61	74.00	-21.39	peak
4	4693.600	40.33	-1.61	38.72	54.00	-15.28	AVG
5	5119.300	54.30	-0.53	53.77	74.00	-20.23	peak
6	5119.300	39.67	-0.53	39.14	54.00	-14.86	AVG
7	5150.000	53.09	-0.48	52.61	74.00	-21.39	peak
8	5150.000	40.30	-0.48	39.82	54.00	-14.18	AVG
9	5186.400	97.21	-0.40	96.81	--	--	peak
10	5350.000	49.75	-0.08	49.67	74.00	-24.33	peak
11	5398.700	51.91	0.02	51.93	74.00	-22.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

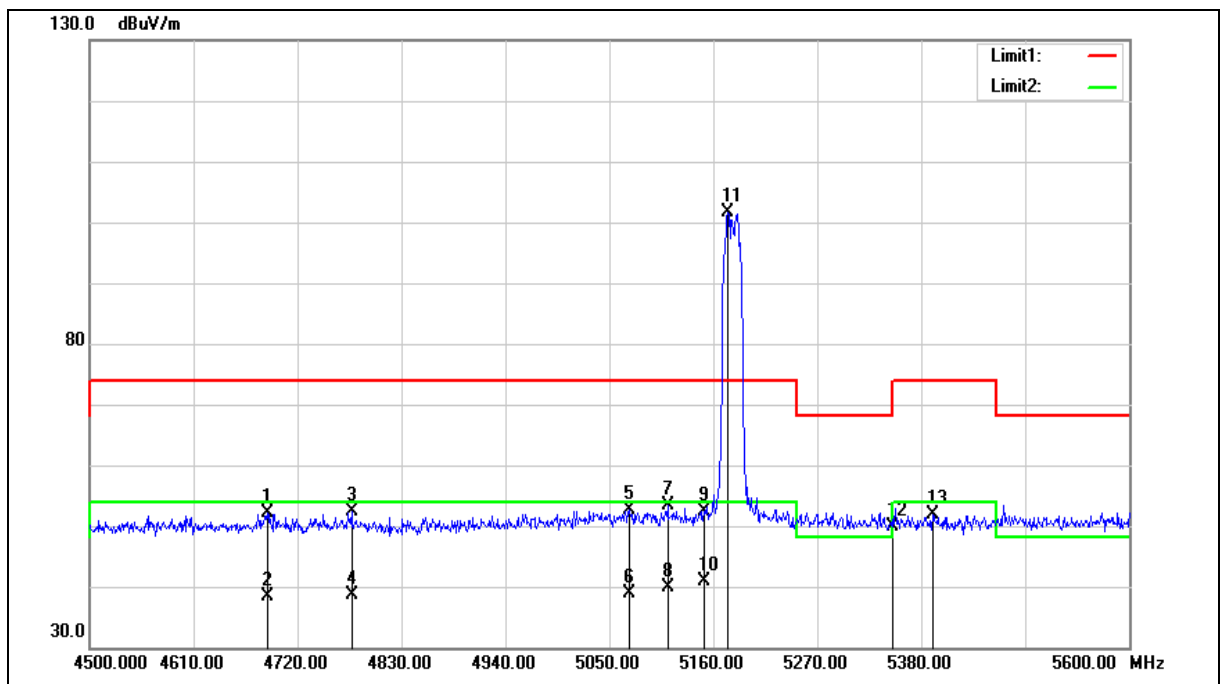

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4688.100	53.88	-1.63	52.25	74.00	-21.75	peak
2	4688.100	40.12	-1.63	38.49	54.00	-15.51	AVG
3	4777.200	53.75	-1.38	52.37	74.00	-21.63	peak
4	4777.200	40.02	-1.38	38.64	54.00	-15.36	AVG
5	5070.900	53.15	-0.63	52.52	74.00	-21.48	peak
6	5070.900	39.56	-0.63	38.93	54.00	-15.07	AVG
7	5111.600	54.04	-0.55	53.49	74.00	-20.51	peak
8	5111.600	40.39	-0.55	39.84	54.00	-14.16	AVG
9	5150.000	52.80	-0.48	52.32	74.00	-21.68	peak
10	5150.000	41.45	-0.48	40.97	54.00	-13.03	AVG
11	5175.400	101.99	-0.43	101.56	--	--	peak
12	5350.000	50.04	-0.08	49.96	74.00	-24.04	peak
13	5392.100	51.93	0.00	51.93	74.00	-22.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

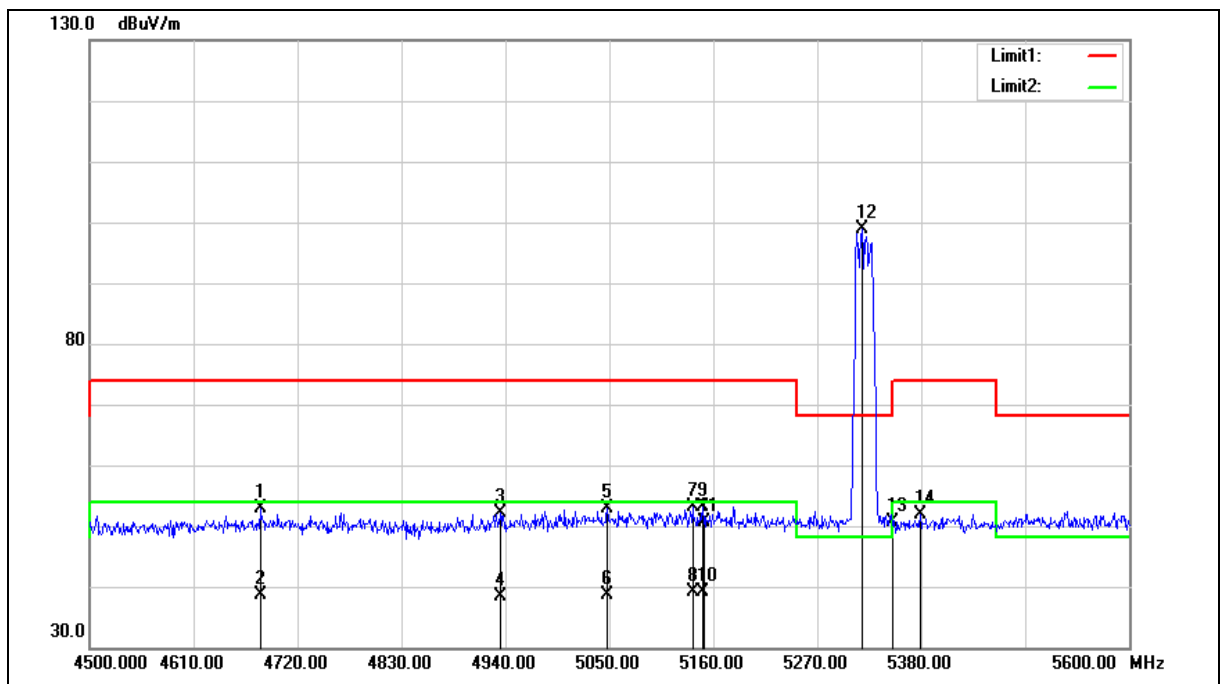

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4680.400	54.54	-1.65	52.89	74.00	-21.11	peak
2	4680.400	40.27	-1.65	38.62	54.00	-15.38	AVG
3	4934.500	53.08	-0.95	52.13	74.00	-21.87	peak
4	4934.500	39.37	-0.95	38.42	54.00	-15.58	AVG
5	5047.800	53.61	-0.68	52.93	74.00	-21.07	peak
6	5047.800	39.40	-0.68	38.72	54.00	-15.28	AVG
7	5138.000	53.57	-0.49	53.08	74.00	-20.92	peak
8	5138.000	39.58	-0.49	39.09	54.00	-14.91	AVG
9	5149.000	53.69	-0.48	53.21	74.00	-20.79	peak
10	5149.000	39.59	-0.48	39.11	54.00	-14.89	AVG
11	5150.000	51.16	-0.48	50.68	74.00	-23.32	peak
12	5317.300	99.04	-0.15	98.89	--	--	peak
13	5350.000	50.77	-0.08	50.69	74.00	-23.31	peak
14	5378.900	51.91	-0.03	51.88	74.00	-22.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

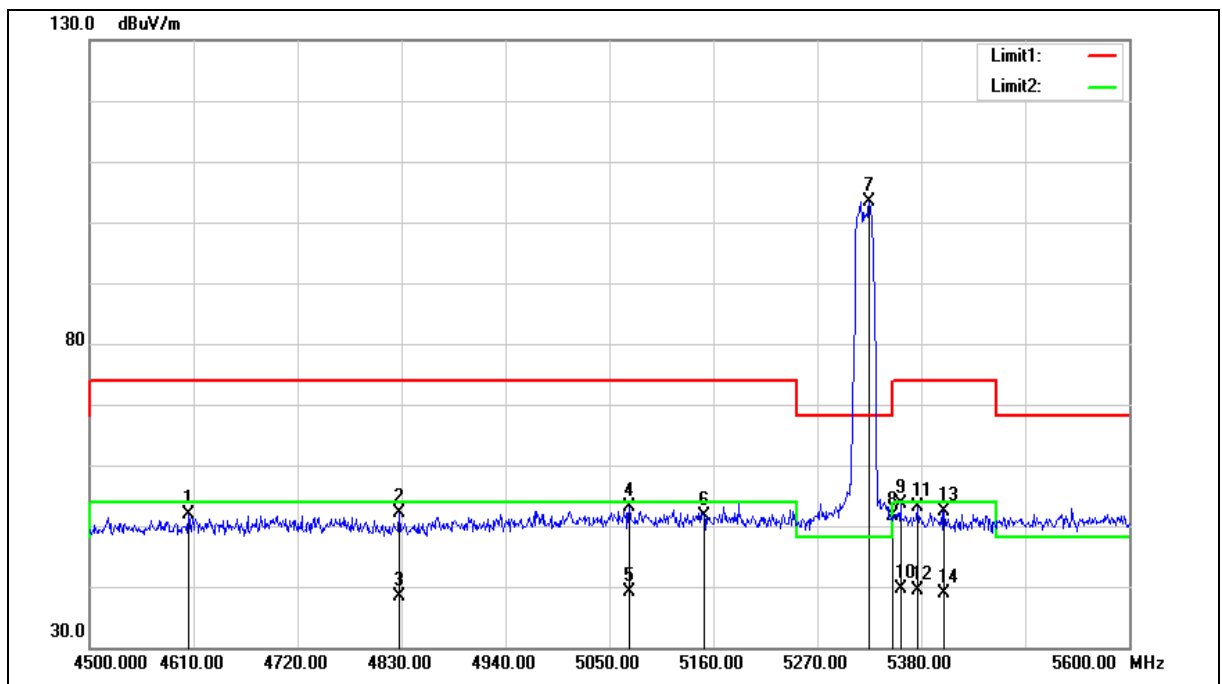

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4604.500	53.82	-1.86	51.96	74.00	-22.04	peak
2	4827.800	53.31	-1.24	52.07	74.00	-21.93	peak
3	4827.800	39.65	-1.24	38.41	54.00	-15.59	AVG
4	5070.900	53.69	-0.63	53.06	74.00	-20.94	peak
5	5070.900	39.77	-0.63	39.14	54.00	-14.86	AVG
6	5150.000	52.10	-0.48	51.62	74.00	-22.38	peak
7	5325.000	103.46	-0.13	103.33	--	--	peak
8	5350.000	51.78	-0.08	51.70	74.00	-22.30	peak
9	5358.000	53.58	-0.06	53.52	74.00	-20.48	peak
10	5358.000	39.74	-0.06	39.68	54.00	-14.32	AVG
11	5376.700	53.11	-0.03	53.08	74.00	-20.92	peak
12	5376.700	39.29	-0.03	39.26	54.00	-14.74	AVG
13	5404.200	52.32	0.02	52.34	74.00	-21.66	peak
14	5404.200	38.97	0.02	38.99	54.00	-15.01	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

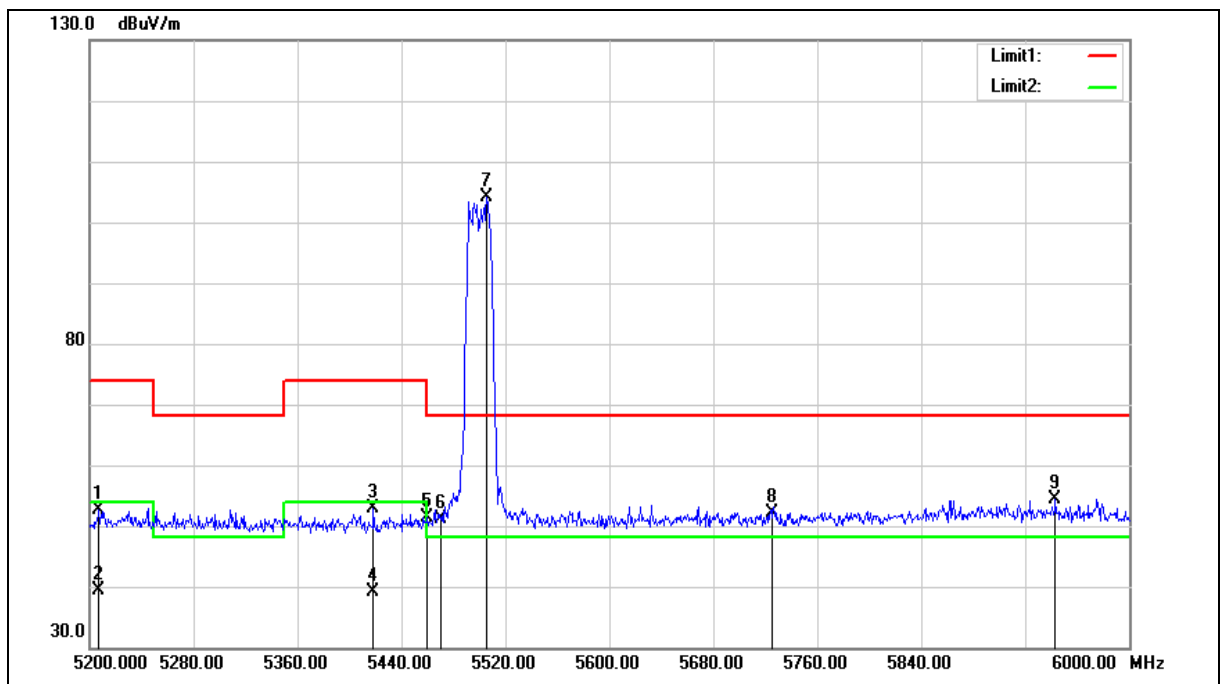

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5207.200	52.94	-0.36	52.58	74.00	-21.42	peak
2	5207.200	39.77	-0.36	39.41	54.00	-14.59	AVG
3	5418.400	52.83	0.05	52.88	74.00	-21.12	peak
4	5418.400	39.20	0.05	39.25	54.00	-14.75	AVG
5	5460.000	51.34	0.14	51.48	74.00	-22.52	peak
6	5470.000	51.00	0.16	51.16	68.20	-17.04	peak
7	5505.600	103.99	0.23	104.22	--	--	peak
8	5725.000	51.19	0.82	52.01	68.20	-16.19	peak
9	5943.200	52.96	1.42	54.38	68.20	-13.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

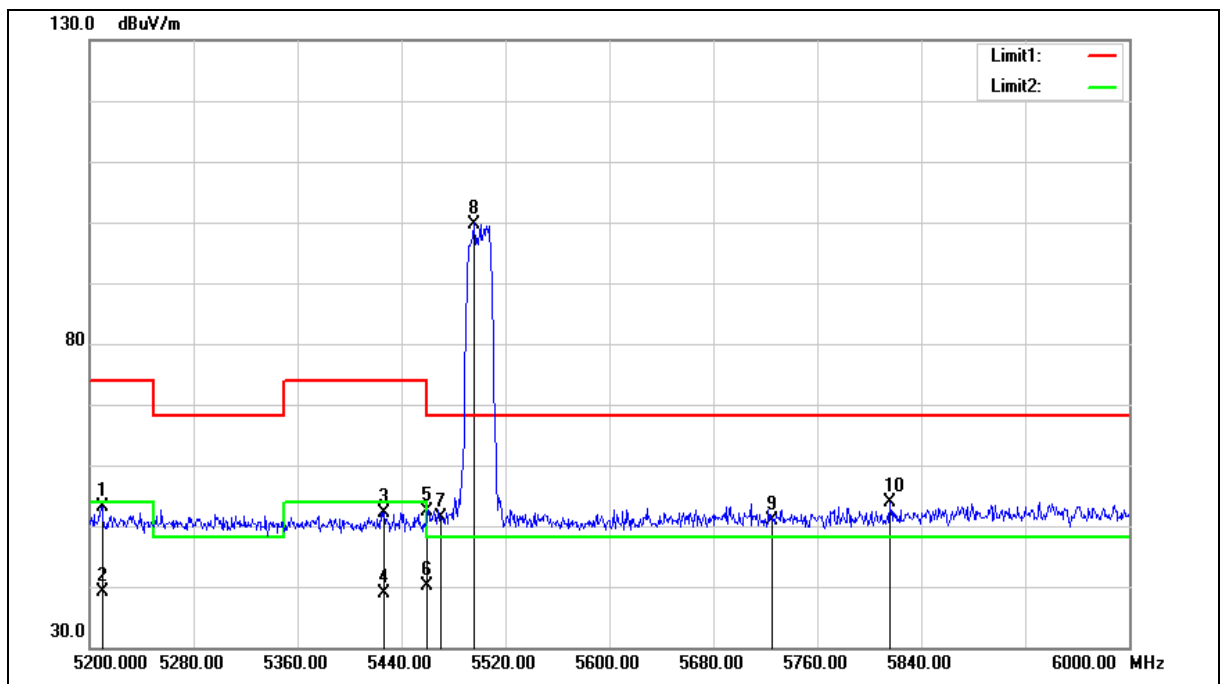

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5209.600	53.56	-0.36	53.20	74.00	-20.80	peak
2	5209.600	39.45	-0.36	39.09	54.00	-14.91	AVG
3	5426.400	52.06	0.06	52.12	74.00	-21.88	peak
4	5426.400	38.89	0.06	38.95	54.00	-15.05	AVG
5	5460.000	52.16	0.14	52.30	74.00	-21.70	peak
6	5460.000	40.10	0.14	40.24	54.00	-13.76	AVG
7	5470.000	51.19	0.16	51.35	68.20	-16.85	peak
8	5496.000	99.54	0.21	99.75	--	--	peak
9	5725.000	50.09	0.82	50.91	68.20	-17.29	peak
10	5816.000	52.85	1.07	53.92	68.20	-14.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

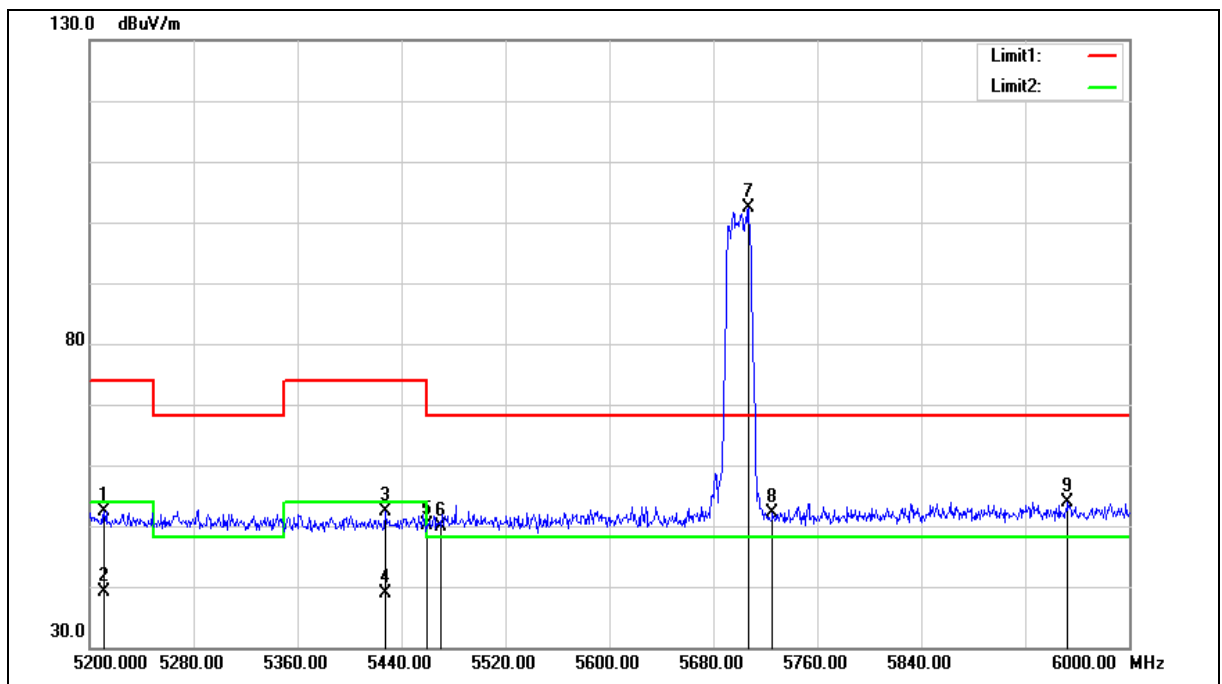

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5211.200	52.81	-0.35	52.46	74.00	-21.54	peak
2	5211.200	39.48	-0.35	39.13	54.00	-14.87	AVG
3	5428.000	52.22	0.08	52.30	74.00	-21.70	peak
4	5428.000	38.85	0.08	38.93	54.00	-15.07	AVG
5	5460.000	50.01	0.14	50.15	74.00	-23.85	peak
6	5470.000	49.80	0.16	49.96	68.20	-18.24	peak
7	5707.200	101.53	0.78	102.31	--	--	peak
8	5725.000	51.32	0.82	52.14	68.20	-16.06	peak
9	5952.800	52.46	1.44	53.90	68.20	-14.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

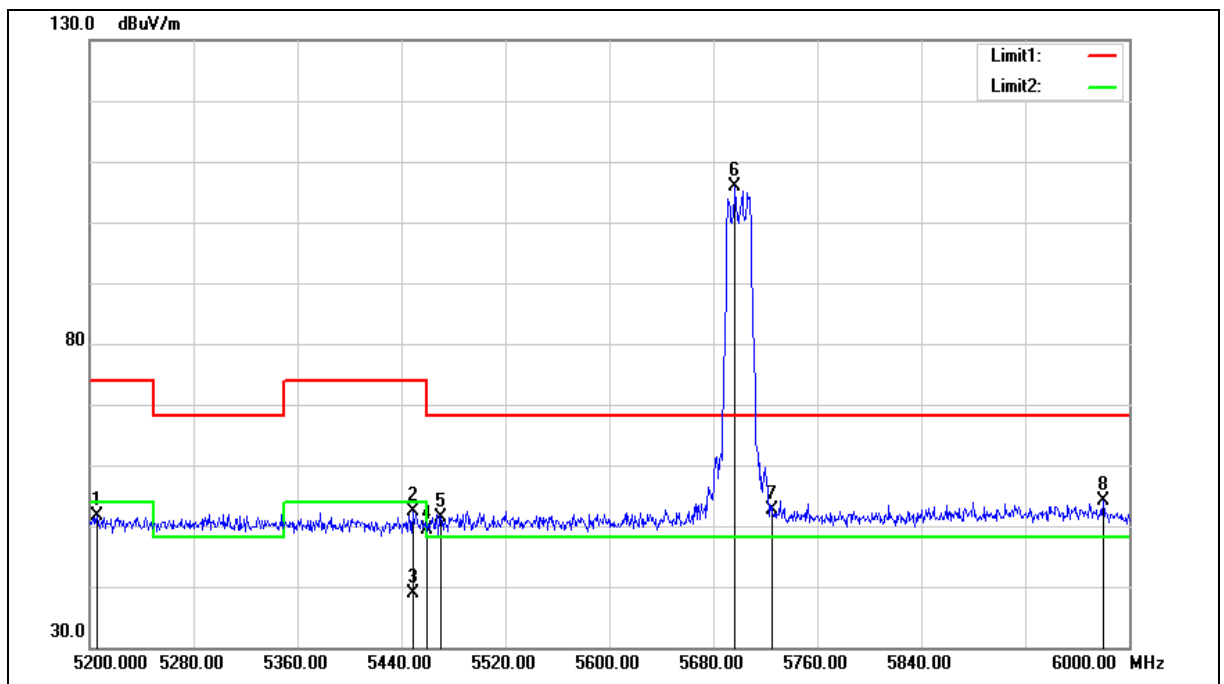

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5205.600	51.93	-0.37	51.56	74.00	-22.44	peak
2	5448.800	52.28	0.12	52.40	74.00	-21.60	peak
3	5448.800	38.81	0.12	38.93	54.00	-15.07	AVG
4	5460.000	49.36	0.14	49.50	74.00	-24.50	peak
5	5470.000	51.16	0.16	51.32	68.20	-16.88	peak
6	5696.800	105.21	0.74	105.95	--	--	peak
7	5725.000	51.70	0.82	52.52	68.20	-15.68	peak
8	5980.000	52.54	1.52	54.06	68.20	-14.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

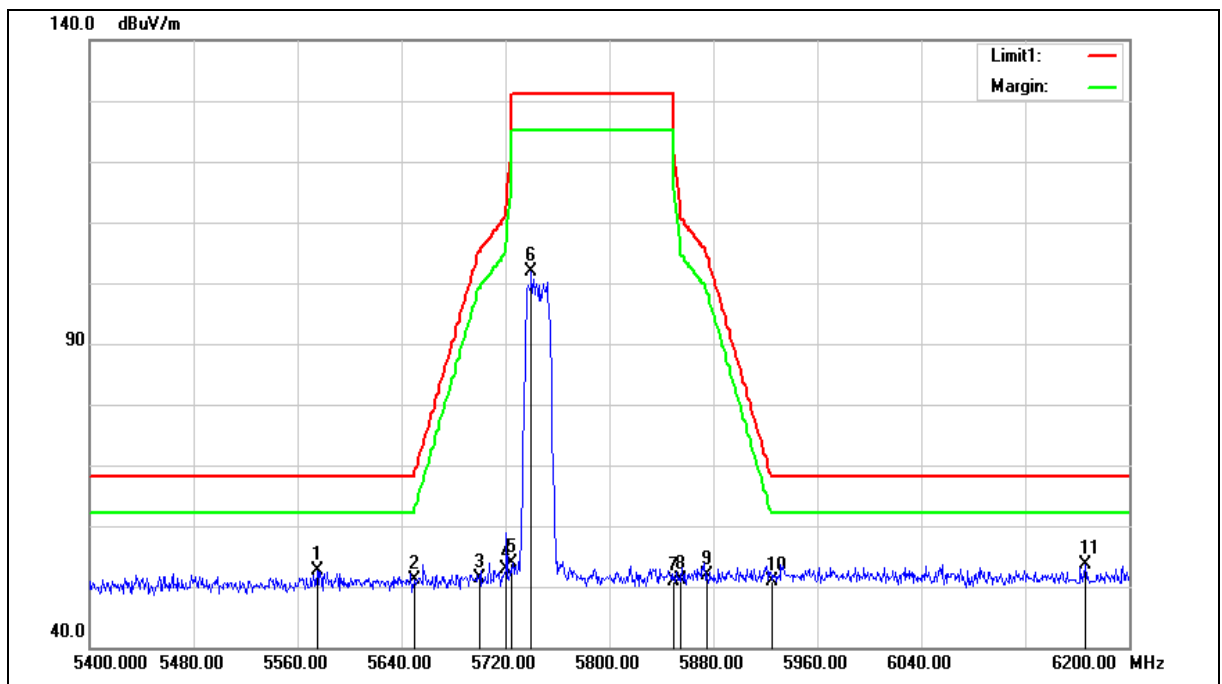

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5575.200	52.16	0.42	52.58	68.20	-15.62	peak
2	5650.000	50.53	0.62	51.15	68.20	-17.05	peak
3	5700.000	50.67	0.75	51.42	105.20	-53.78	peak
4	5720.000	52.06	0.81	52.87	110.80	-57.93	peak
5	5725.000	52.98	0.82	53.80	122.20	-68.40	peak
6	5740.000	101.10	0.86	101.96	--	--	peak
7	5850.000	49.68	1.17	50.85	122.20	-71.35	peak
8	5855.000	50.04	1.18	51.22	110.80	-59.58	peak
9	5875.000	50.54	1.23	51.77	105.20	-53.43	peak
10	5925.000	49.63	1.37	51.00	68.20	-17.20	peak
11	6166.400	51.54	2.16	53.70	68.20	-14.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

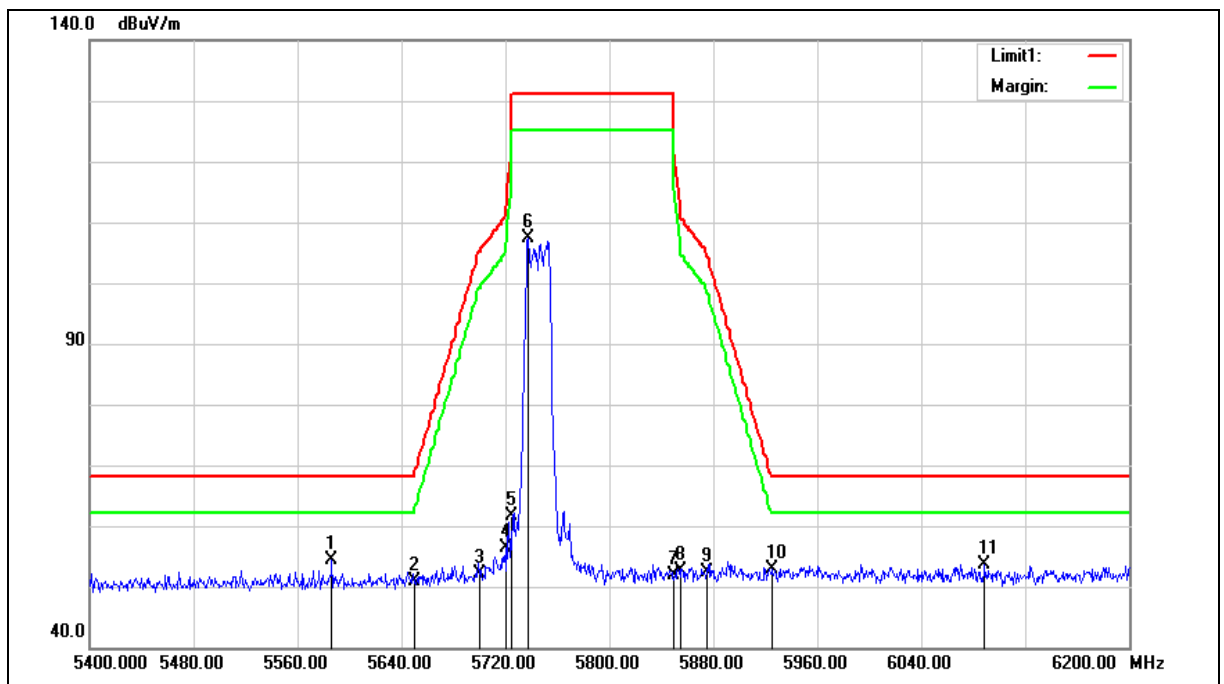

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5586.400	54.00	0.45	54.45	68.20	-13.75	peak
2	5650.000	50.31	0.62	50.93	68.20	-17.27	peak
3	5700.000	51.27	0.75	52.02	105.20	-53.18	peak
4	5720.000	55.66	0.81	56.47	110.80	-54.33	peak
5	5725.000	60.85	0.82	61.67	122.20	-60.53	peak
6	5737.600	106.51	0.86	107.37	--	--	peak
7	5850.000	50.76	1.17	51.93	122.20	-70.27	peak
8	5855.000	51.57	1.18	52.75	110.80	-58.05	peak
9	5875.000	51.24	1.23	52.47	105.20	-52.73	peak
10	5925.000	51.48	1.37	52.85	68.20	-15.35	peak
11	6088.800	51.83	1.89	53.72	68.20	-14.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

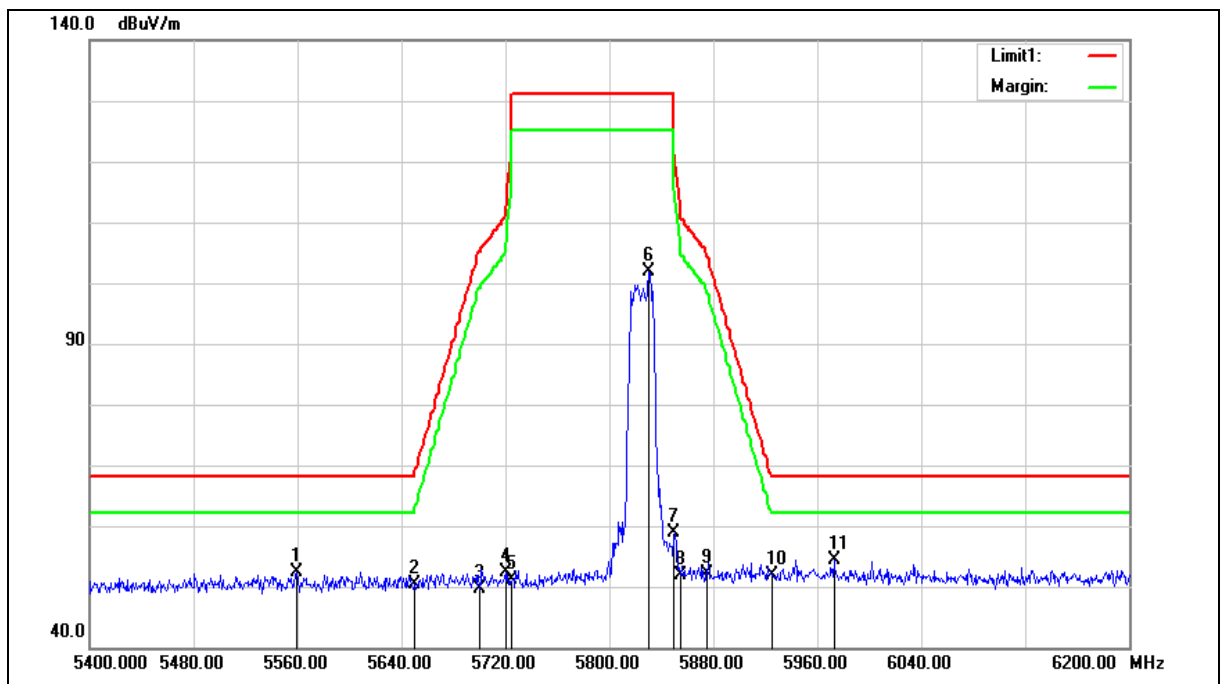

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5559.200	52.11	0.37	52.48	68.20	-15.72	peak
2	5650.000	49.77	0.62	50.39	68.20	-17.81	peak
3	5700.000	48.96	0.75	49.71	105.20	-55.49	peak
4	5720.000	51.45	0.81	52.26	110.80	-58.54	peak
5	5725.000	50.41	0.82	51.23	122.20	-70.97	peak
6	5830.400	100.68	1.11	101.79	--	--	peak
7	5850.000	57.80	1.17	58.97	122.20	-63.23	peak
8	5855.000	50.69	1.18	51.87	110.80	-58.93	peak
9	5875.000	50.91	1.23	52.14	105.20	-53.06	peak
10	5925.000	50.57	1.37	51.94	68.20	-16.26	peak
11	5972.800	52.96	1.50	54.46	68.20	-13.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

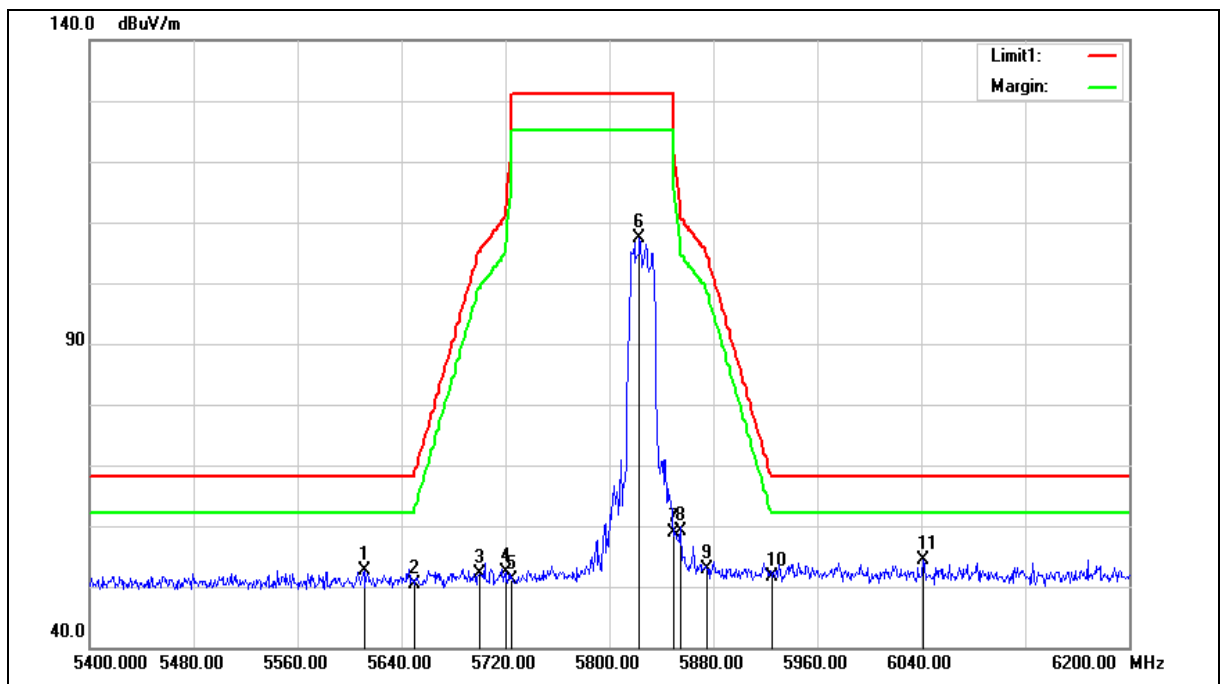

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5611.200	52.09	0.52	52.61	68.20	-15.59	peak
2	5650.000	49.87	0.62	50.49	68.20	-17.71	peak
3	5700.000	51.29	0.75	52.04	105.20	-53.16	peak
4	5720.000	51.55	0.81	52.36	110.80	-58.44	peak
5	5725.000	50.34	0.82	51.16	122.20	-71.04	peak
6	5823.200	106.19	1.10	107.29	--	--	peak
7	5850.000	57.66	1.17	58.83	122.20	-63.37	peak
8	5855.000	57.84	1.18	59.02	110.80	-51.78	peak
9	5875.000	51.63	1.23	52.86	105.20	-52.34	peak
10	5925.000	50.38	1.37	51.75	68.20	-16.45	peak
11	6041.600	52.73	1.71	54.44	68.20	-13.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

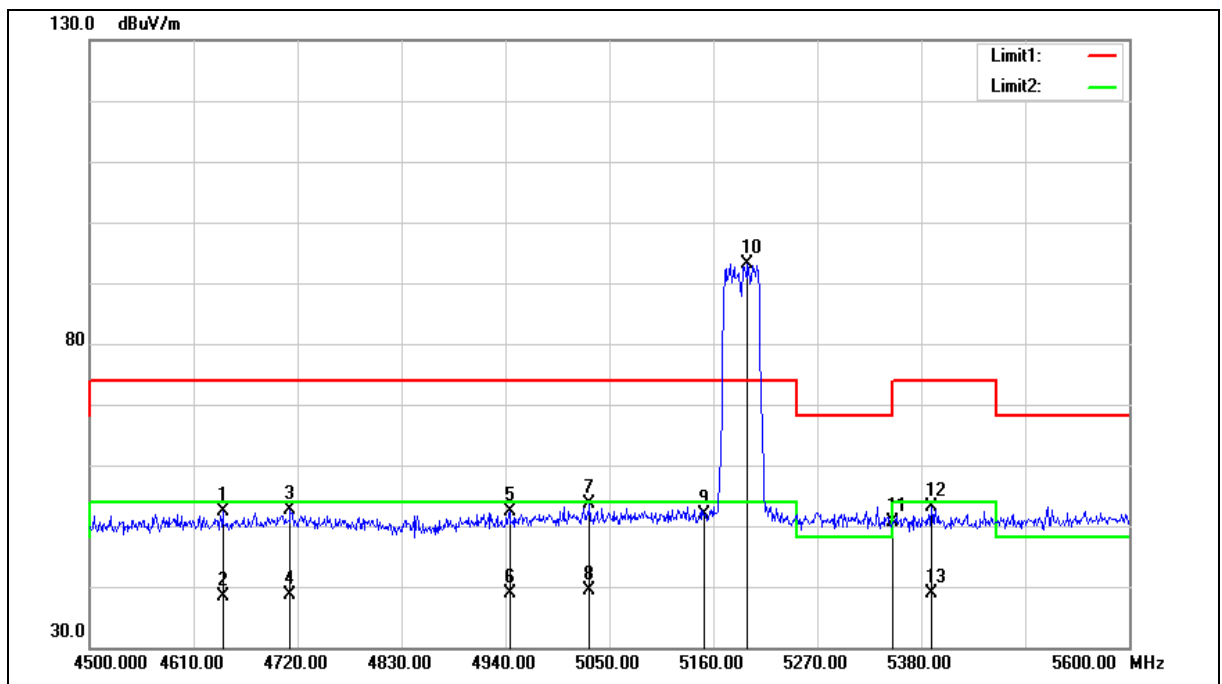

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4640.800	54.07	-1.76	52.31	74.00	-21.69	peak
2	4640.800	40.25	-1.76	38.49	54.00	-15.51	AVG
3	4712.300	54.09	-1.57	52.52	74.00	-21.48	peak
4	4712.300	40.19	-1.57	38.62	54.00	-15.38	AVG
5	4944.400	53.28	-0.93	52.35	74.00	-21.65	peak
6	4944.400	39.76	-0.93	38.83	54.00	-15.17	AVG
7	5029.100	54.43	-0.72	53.71	74.00	-20.29	peak
8	5029.100	40.00	-0.72	39.28	54.00	-14.72	AVG
9	5150.000	52.27	-0.48	51.79	74.00	-22.21	peak
10	5196.300	93.59	-0.38	93.21	--	--	peak
11	5350.000	50.73	-0.08	50.65	74.00	-23.35	peak
12	5391.000	53.24	0.00	53.24	74.00	-20.76	peak
13	5391.000	38.82	0.00	38.82	54.00	-15.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

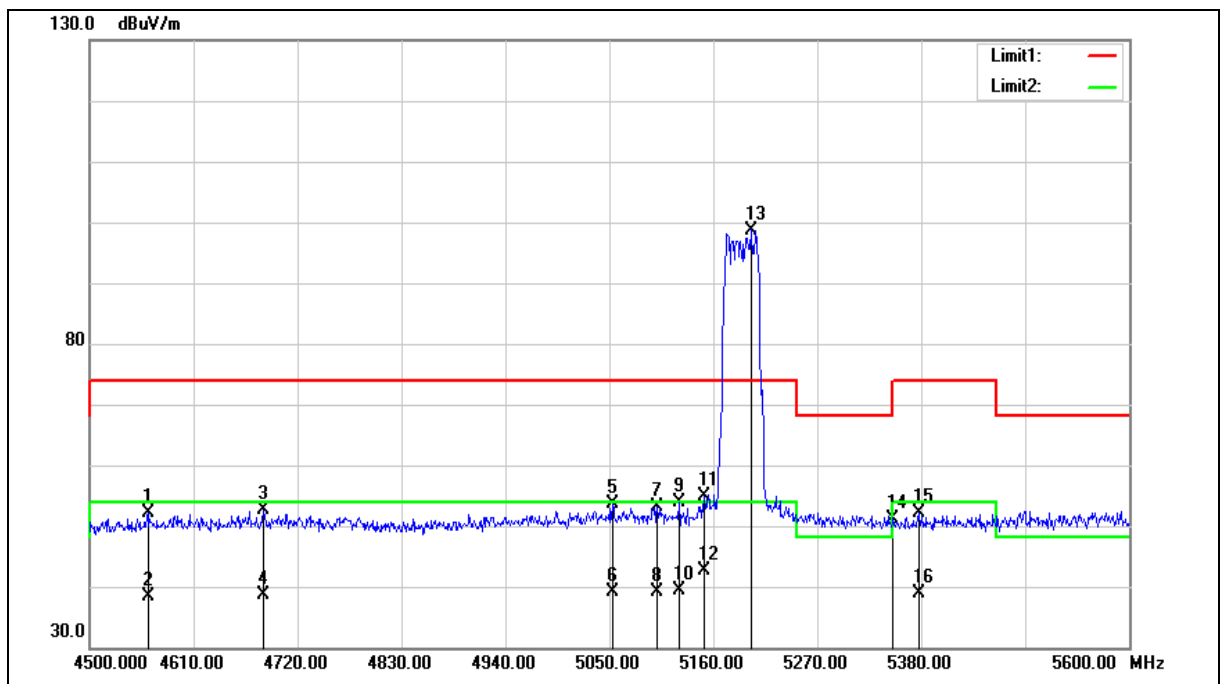

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4561.600	54.05	-1.98	52.07	74.00	-21.93	peak
2	4561.600	40.37	-1.98	38.39	54.00	-15.61	AVG
3	4683.700	54.31	-1.64	52.67	74.00	-21.33	peak
4	4683.700	40.19	-1.64	38.55	54.00	-15.45	AVG
5	5053.300	54.24	-0.66	53.58	74.00	-20.42	peak
6	5053.300	39.90	-0.66	39.24	54.00	-14.76	AVG
7	5100.600	53.61	-0.57	53.04	74.00	-20.96	peak
8	5100.600	39.70	-0.57	39.13	54.00	-14.87	AVG
9	5123.700	54.37	-0.52	53.85	74.00	-20.15	peak
10	5123.700	39.89	-0.52	39.37	54.00	-14.63	AVG
11	5150.000	55.27	-0.48	54.79	74.00	-19.21	peak
12	5150.000	43.19	-0.48	42.71	54.00	-11.29	AVG
13	5199.600	99.12	-0.37	98.75	--	--	peak
14	5350.000	51.33	-0.08	51.25	74.00	-22.75	peak
15	5377.800	52.12	-0.03	52.09	74.00	-21.91	peak
16	5377.800	39.01	-0.03	38.98	54.00	-15.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

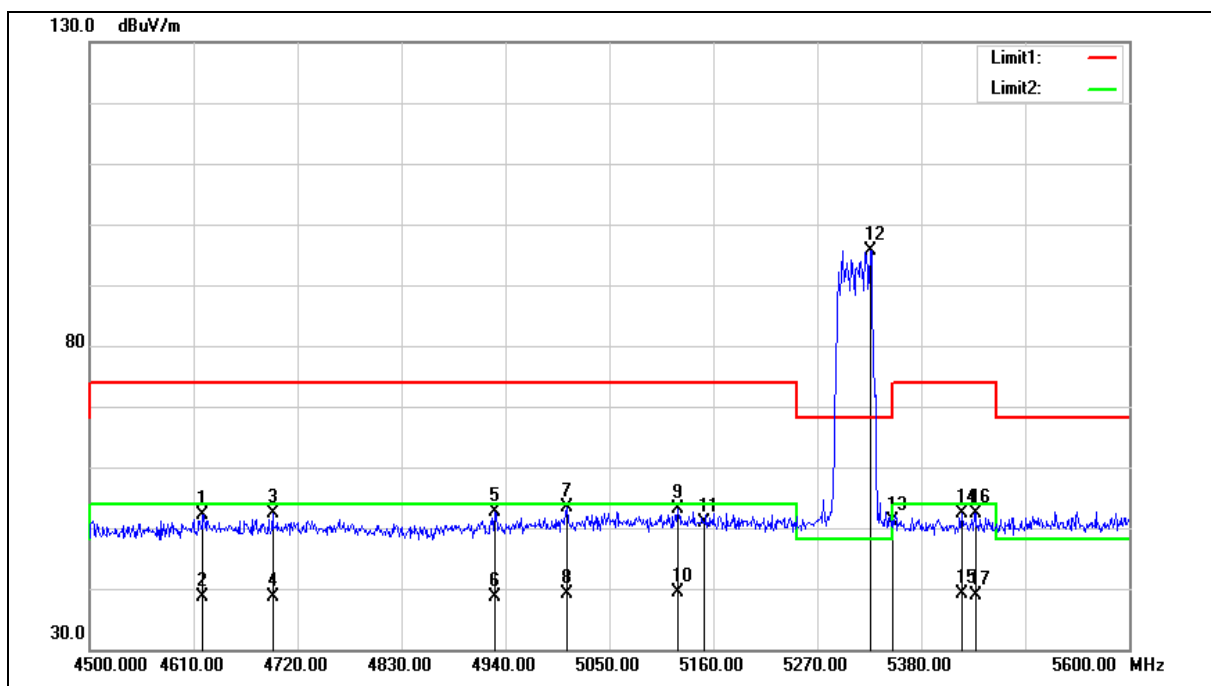

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4619.900	53.95	-1.81	52.14	74.00	-21.86	peak
2	4619.900	40.39	-1.81	38.58	54.00	-15.42	AVG
3	4693.600	53.91	-1.61	52.30	74.00	-21.70	peak
4	4693.600	40.21	-1.61	38.60	54.00	-15.40	AVG
5	4929.000	53.62	-0.96	52.66	74.00	-21.34	peak
6	4929.000	39.64	-0.96	38.68	54.00	-15.32	AVG
7	5004.900	54.25	-0.77	53.48	74.00	-20.52	peak
8	5004.900	39.80	-0.77	39.03	54.00	-14.97	AVG
9	5122.600	53.54	-0.53	53.01	74.00	-20.99	peak
10	5122.600	39.80	-0.53	39.27	54.00	-14.73	AVG
11	5150.000	51.36	-0.48	50.88	74.00	-23.12	peak
12	5326.100	95.84	-0.12	95.72	--	--	peak
13	5350.000	51.33	-0.08	51.25	74.00	-22.75	peak
14	5422.900	52.37	0.06	52.43	74.00	-21.57	peak
15	5422.900	38.95	0.06	39.01	54.00	-14.99	AVG
16	5437.200	52.36	0.09	52.45	74.00	-21.55	peak
17	5437.200	38.69	0.09	38.78	54.00	-15.22	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

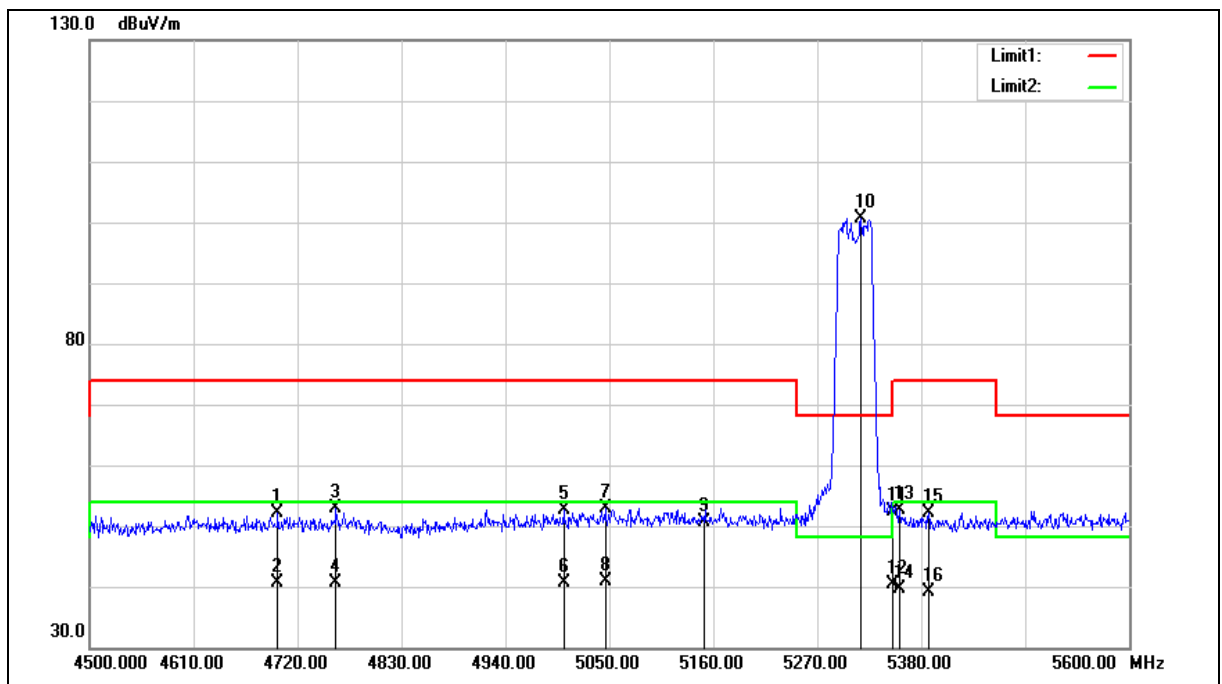

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4699.100	53.83	-1.59	52.24	74.00	-21.76	peak
2	4699.100	42.17	-1.59	40.58	54.00	-13.42	AVG
3	4760.700	54.33	-1.42	52.91	74.00	-21.09	peak
4	4760.700	42.05	-1.42	40.63	54.00	-13.37	AVG
5	5001.600	53.48	-0.77	52.71	74.00	-21.29	peak
6	5001.600	41.44	-0.77	40.67	54.00	-13.33	AVG
7	5045.600	53.48	-0.68	52.80	74.00	-21.20	peak
8	5045.600	41.67	-0.68	40.99	54.00	-13.01	AVG
9	5150.000	51.22	-0.48	50.74	74.00	-23.26	peak
10	5316.200	100.77	-0.15	100.62	--	--	peak
11	5350.000	52.35	-0.08	52.27	74.00	-21.73	peak
12	5350.000	40.47	-0.08	40.39	54.00	-13.61	AVG
13	5356.900	52.66	-0.06	52.60	74.00	-21.40	peak
14	5356.900	39.76	-0.06	39.70	54.00	-14.30	AVG
15	5387.700	52.23	0.00	52.23	74.00	-21.77	peak
16	5387.700	39.07	0.00	39.07	54.00	-14.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

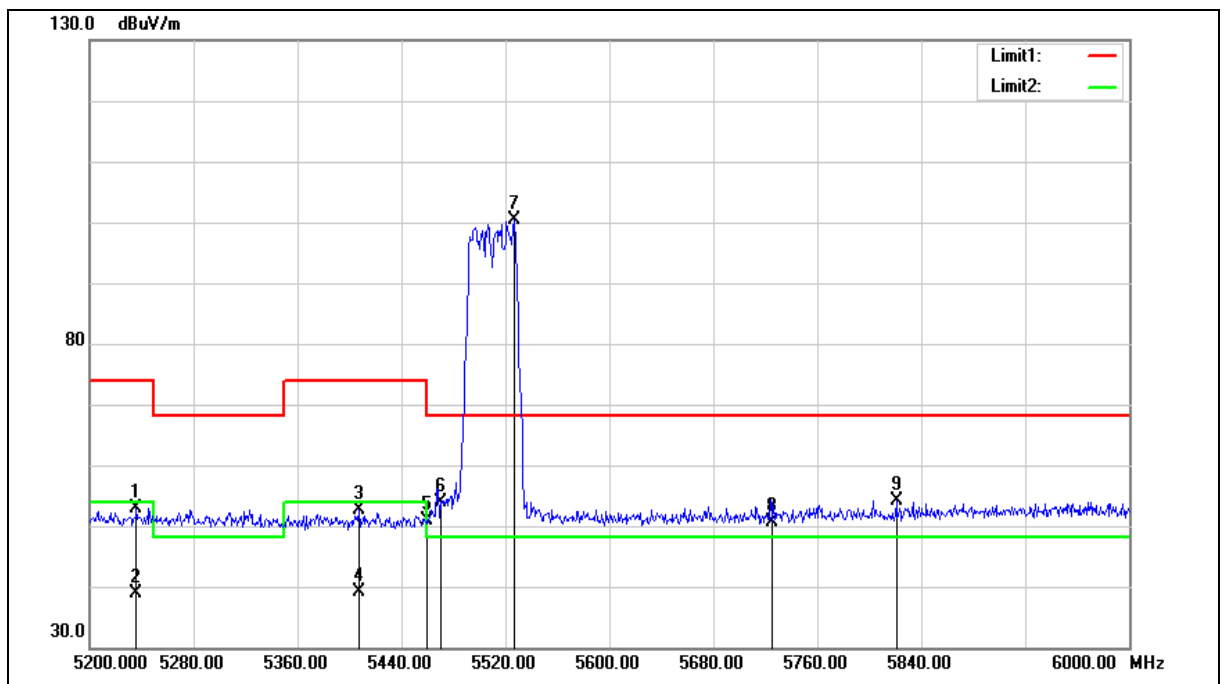

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5236.000	53.27	-0.31	52.96	74.00	-21.04	peak
2	5236.000	39.08	-0.31	38.77	54.00	-15.23	AVG
3	5407.200	52.54	0.04	52.58	74.00	-21.42	peak
4	5407.200	39.16	0.04	39.20	54.00	-14.80	AVG
5	5460.000	50.76	0.14	50.90	74.00	-23.10	peak
6	5470.000	53.68	0.16	53.84	68.20	-14.36	peak
7	5526.400	100.01	0.28	100.29	--	--	peak
8	5725.000	49.88	0.82	50.70	68.20	-17.50	peak
9	5820.800	53.16	1.08	54.24	68.20	-13.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

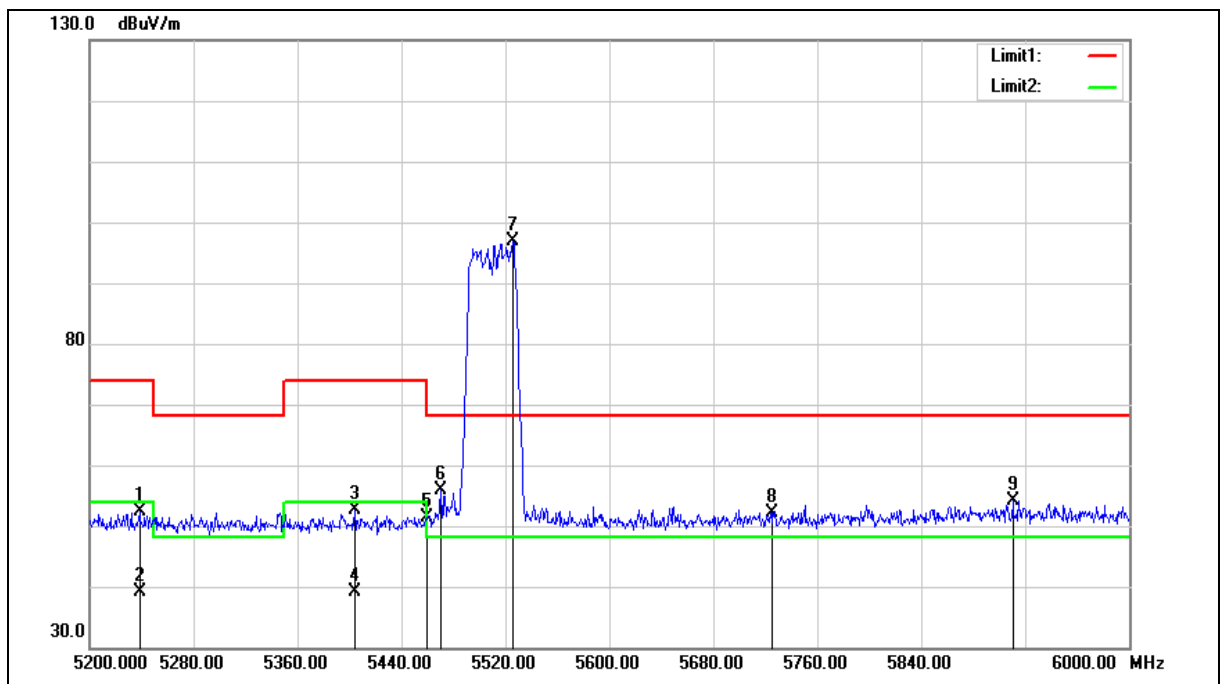

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5238.400	52.62	-0.31	52.31	74.00	-21.69	peak
2	5238.400	39.33	-0.31	39.02	54.00	-14.98	AVG
3	5404.000	52.53	0.02	52.55	74.00	-21.45	peak
4	5404.000	39.21	0.02	39.23	54.00	-14.77	AVG
5	5460.000	51.14	0.14	51.28	74.00	-22.72	peak
6	5470.000	55.64	0.16	55.80	68.20	-12.40	peak
7	5525.600	96.65	0.28	96.93	--	--	peak
8	5725.000	51.25	0.82	52.07	68.20	-16.13	peak
9	5910.400	52.73	1.33	54.06	68.20	-14.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

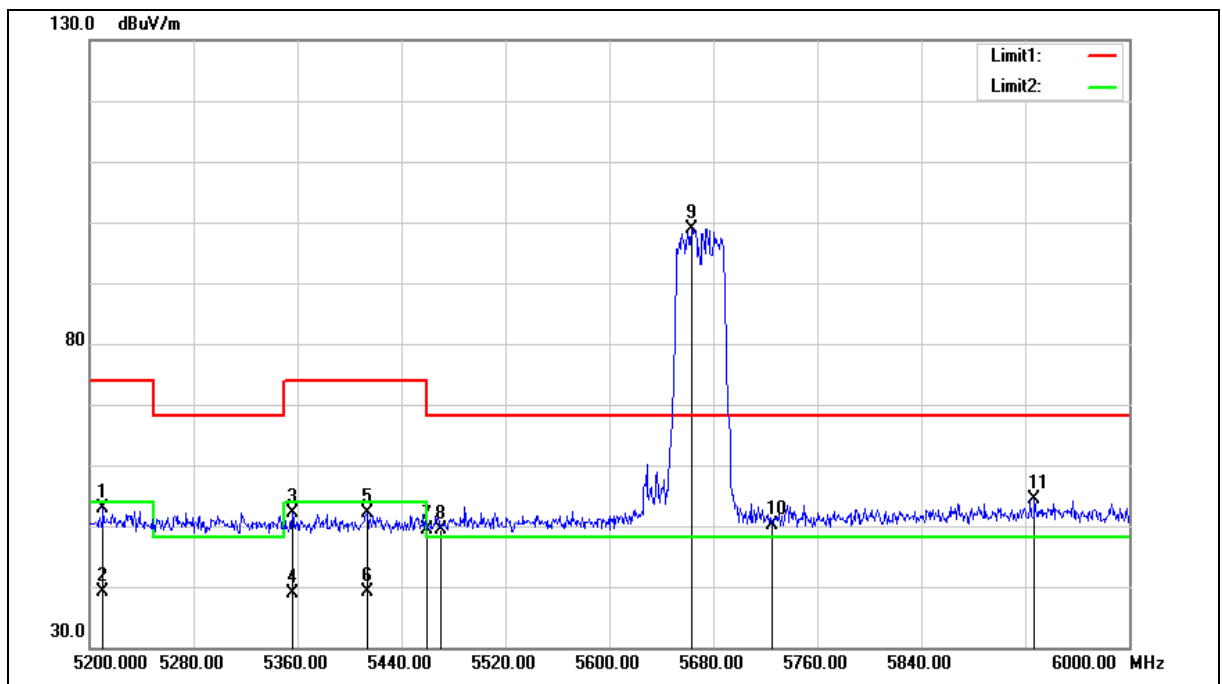

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5210.400	53.12	-0.35	52.77	74.00	-21.23	peak
2	5210.400	39.52	-0.35	39.17	54.00	-14.83	AVG
3	5356.000	52.27	-0.07	52.20	74.00	-21.80	peak
4	5356.000	39.07	-0.07	39.00	54.00	-15.00	AVG
5	5413.600	52.01	0.05	52.06	74.00	-21.94	peak
6	5413.600	39.17	0.05	39.22	54.00	-14.78	AVG
7	5460.000	49.21	0.14	49.35	74.00	-24.65	peak
8	5470.000	49.34	0.16	49.50	68.20	-18.70	peak
9	5663.200	98.30	0.66	98.96	--	--	peak
10	5725.000	49.35	0.82	50.17	68.20	-18.03	peak
11	5927.200	53.08	1.37	54.45	68.20	-13.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

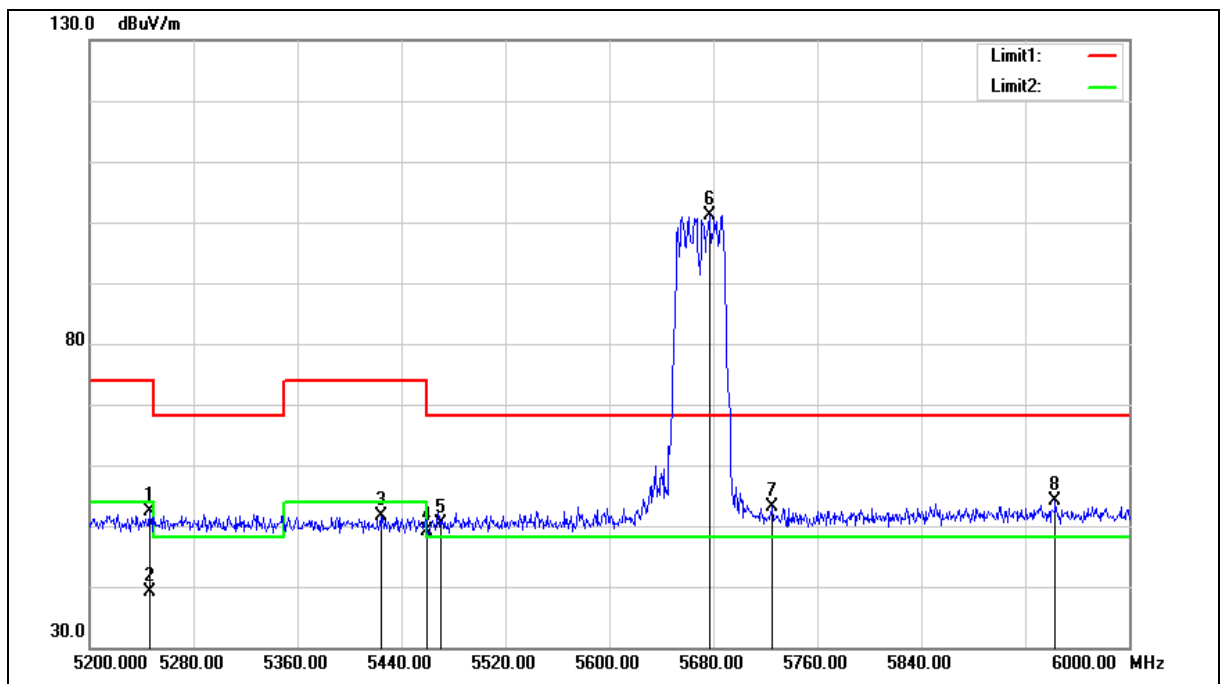

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5246.400	52.63	-0.28	52.35	74.00	-21.65	peak
2	5246.400	39.51	-0.28	39.23	54.00	-14.77	AVG
3	5424.000	51.68	0.06	51.74	74.00	-22.26	peak
4	5460.000	49.05	0.14	49.19	74.00	-24.81	peak
5	5470.000	50.33	0.16	50.49	68.20	-17.71	peak
6	5676.800	100.49	0.69	101.18	--	--	peak
7	5725.000	52.23	0.82	53.05	68.20	-15.15	peak
8	5943.200	52.76	1.42	54.18	68.20	-14.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

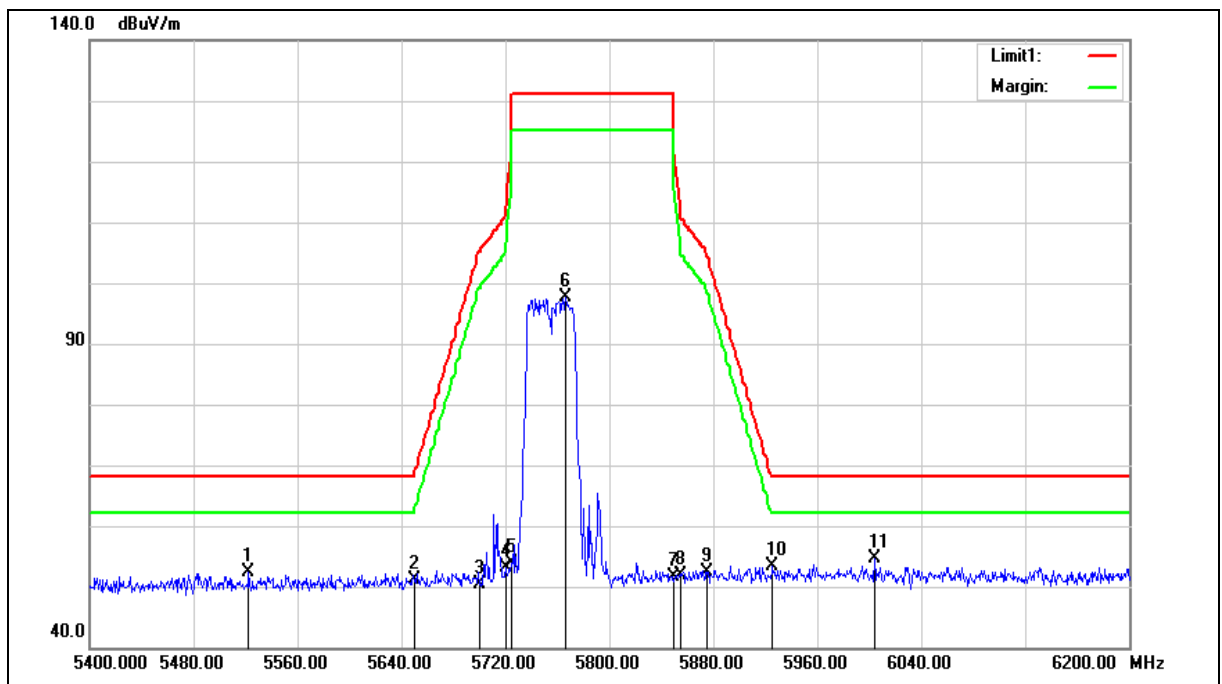

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5522.400	52.00	0.28	52.28	68.20	-15.92	peak
2	5650.000	50.56	0.62	51.18	68.20	-17.02	peak
3	5700.000	49.61	0.75	50.36	105.20	-54.84	peak
4	5720.000	52.32	0.81	53.13	110.80	-57.67	peak
5	5725.000	53.16	0.82	53.98	122.20	-68.22	peak
6	5766.400	96.61	0.94	97.55	--	--	peak
7	5850.000	50.40	1.17	51.57	122.20	-70.63	peak
8	5855.000	50.59	1.18	51.77	110.80	-59.03	peak
9	5875.000	51.07	1.23	52.30	105.20	-52.90	peak
10	5925.000	51.97	1.37	53.34	68.20	-14.86	peak
11	6004.000	53.04	1.58	54.62	68.20	-13.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

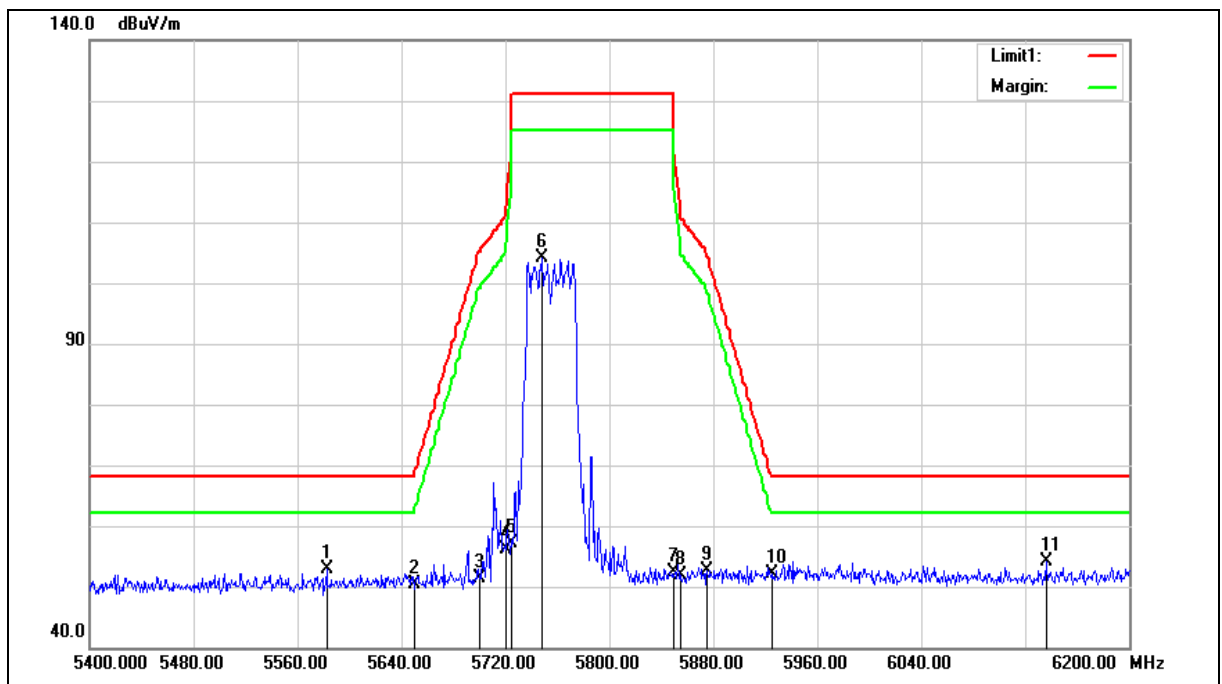

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5582.400	52.36	0.43	52.79	68.20	-15.41	peak
2	5650.000	49.70	0.62	50.32	68.20	-17.88	peak
3	5700.000	50.66	0.75	51.41	105.20	-53.79	peak
4	5720.000	55.40	0.81	56.21	110.80	-54.59	peak
5	5725.000	56.41	0.82	57.23	122.20	-64.97	peak
6	5748.000	103.13	0.89	104.02	--	--	peak
7	5850.000	51.20	1.17	52.37	122.20	-69.83	peak
8	5855.000	50.62	1.18	51.80	110.80	-59.00	peak
9	5875.000	51.51	1.23	52.74	105.20	-52.46	peak
10	5925.000	50.84	1.37	52.21	68.20	-15.99	peak
11	6136.000	52.02	2.06	54.08	68.20	-14.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

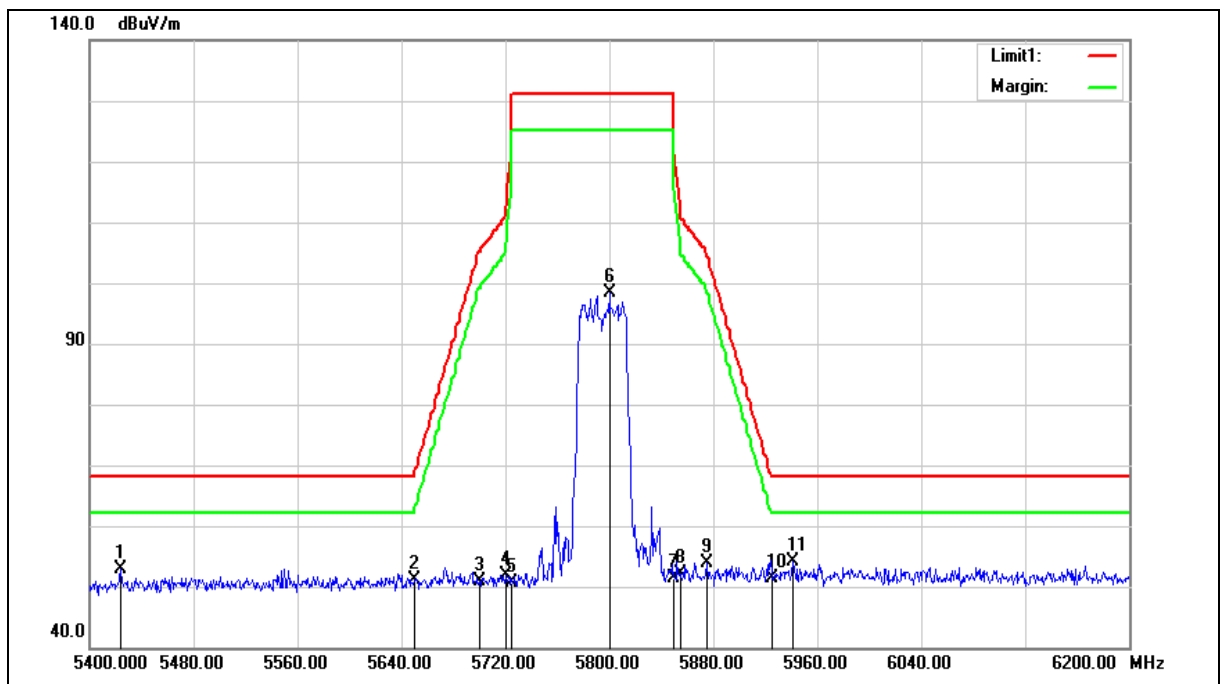

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5424.000	52.85	0.06	52.91	68.20	-15.29	peak
2	5650.000	50.42	0.62	51.04	68.20	-17.16	peak
3	5700.000	50.02	0.75	50.77	105.20	-54.43	peak
4	5720.000	51.12	0.81	51.93	110.80	-58.87	peak
5	5725.000	49.89	0.82	50.71	122.20	-71.49	peak
6	5800.000	97.29	1.03	98.32	--	--	peak
7	5850.000	50.24	1.17	51.41	122.20	-70.79	peak
8	5855.000	51.06	1.18	52.24	110.80	-58.56	peak
9	5875.000	52.57	1.23	53.80	105.20	-51.40	peak
10	5925.000	50.04	1.37	51.41	68.20	-16.79	peak
11	5940.800	52.67	1.42	54.09	68.20	-14.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

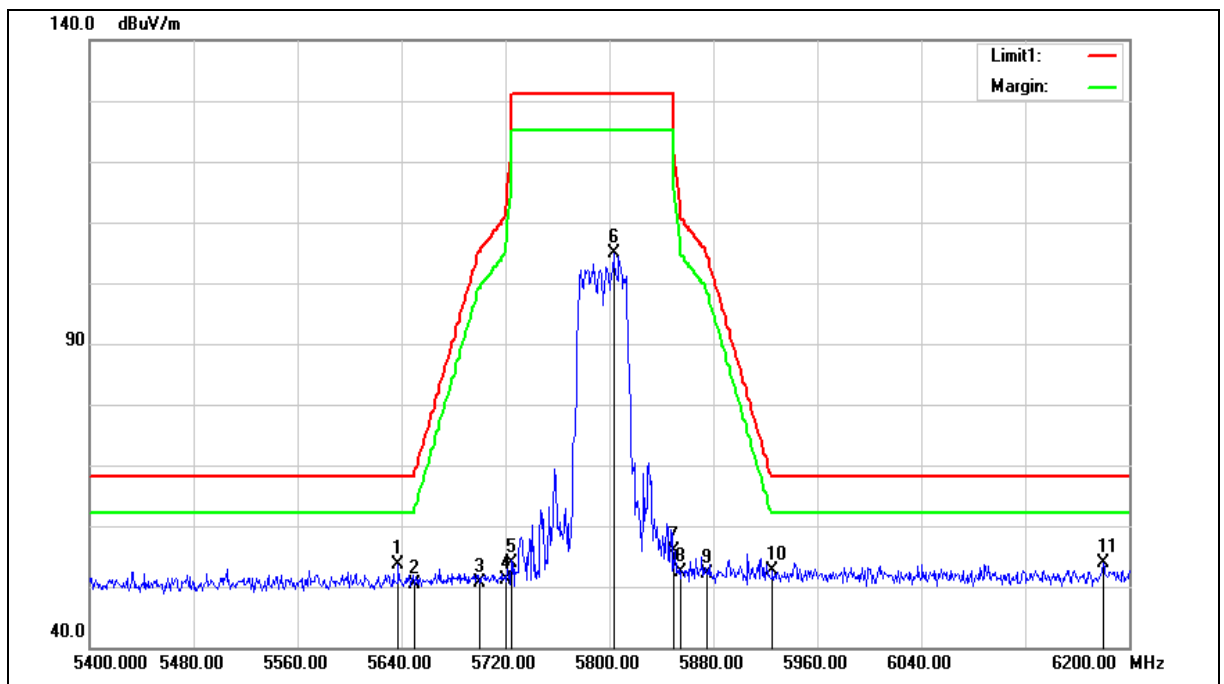

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5637.600	53.04	0.59	53.63	68.20	-14.57	peak
2	5650.000	49.80	0.62	50.42	68.20	-17.78	peak
3	5700.000	49.87	0.75	50.62	105.20	-54.58	peak
4	5720.000	50.37	0.81	51.18	110.80	-59.62	peak
5	5725.000	53.09	0.82	53.91	122.20	-68.29	peak
6	5803.200	103.82	1.04	104.86	--	--	peak
7	5850.000	54.59	1.17	55.76	122.20	-66.44	peak
8	5855.000	51.15	1.18	52.33	110.80	-58.47	peak
9	5875.000	51.01	1.23	52.24	105.20	-52.96	peak
10	5925.000	51.17	1.37	52.54	68.20	-15.66	peak
11	6180.000	51.64	2.21	53.85	68.20	-14.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

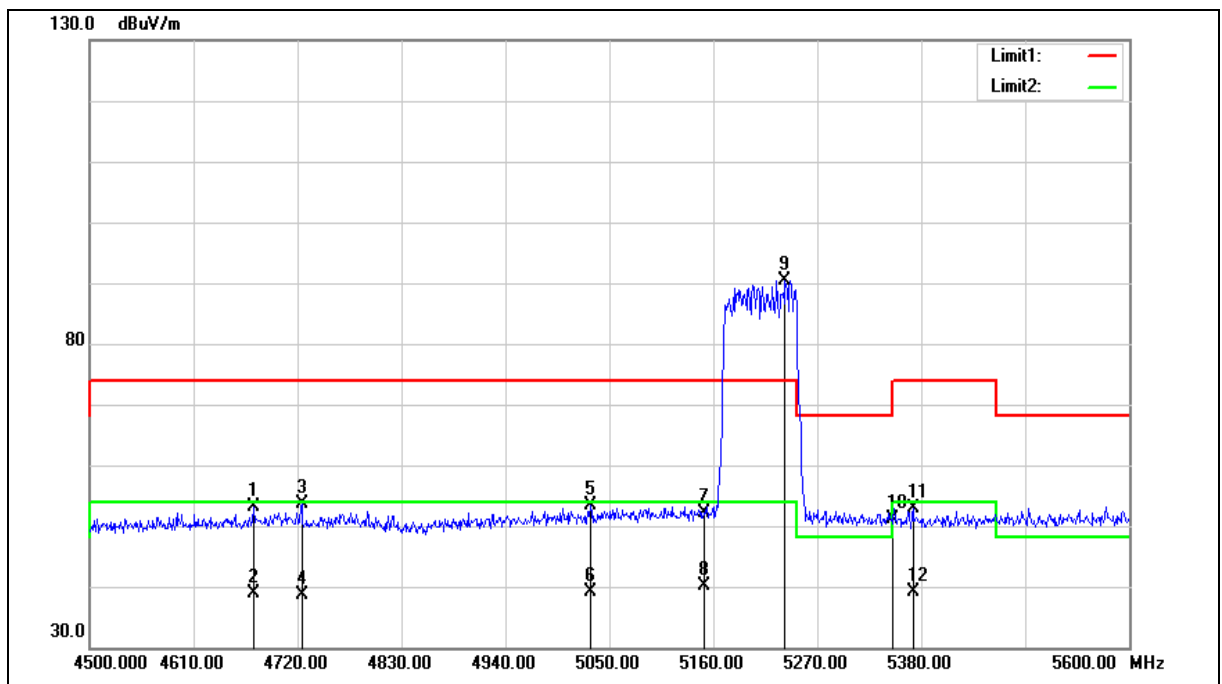

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4673.800	54.87	-1.67	53.20	74.00	-20.80	peak
2	4673.800	40.57	-1.67	38.90	54.00	-15.10	AVG
3	4724.400	55.10	-1.53	53.57	74.00	-20.43	peak
4	4724.400	40.23	-1.53	38.70	54.00	-15.30	AVG
5	5030.200	54.15	-0.72	53.43	74.00	-20.57	peak
6	5030.200	39.79	-0.72	39.07	54.00	-14.93	AVG
7	5150.000	52.63	-0.48	52.15	74.00	-21.85	peak
8	5150.000	40.66	-0.48	40.18	54.00	-13.82	AVG
9	5235.900	90.73	-0.31	90.42	--	--	peak
10	5350.000	51.28	-0.08	51.20	74.00	-22.80	peak
11	5371.200	52.84	-0.03	52.81	74.00	-21.19	peak
12	5371.200	39.14	-0.03	39.11	54.00	-14.89	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

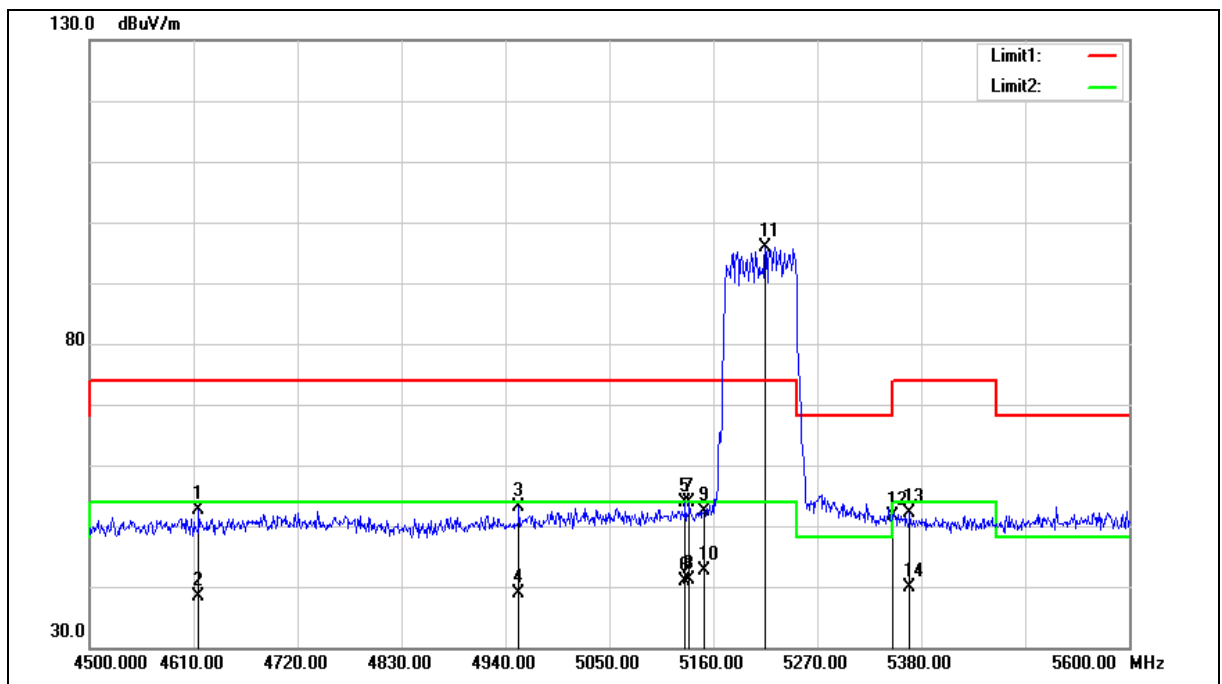

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4615.500	54.37	-1.82	52.55	74.00	-21.45	peak
2	4615.500	40.17	-1.82	38.35	54.00	-15.65	AVG
3	4954.300	53.90	-0.89	53.01	74.00	-20.99	peak
4	4954.300	39.81	-0.89	38.92	54.00	-15.08	AVG
5	5130.300	54.35	-0.52	53.83	74.00	-20.17	peak
6	5130.300	41.43	-0.52	40.91	54.00	-13.09	AVG
7	5134.700	54.47	-0.51	53.96	74.00	-20.04	peak
8	5134.700	41.73	-0.51	41.22	54.00	-12.78	AVG
9	5150.000	52.86	-0.48	52.38	74.00	-21.62	peak
10	5150.000	43.03	-0.48	42.55	54.00	-11.45	AVG
11	5215.000	96.27	-0.35	95.92	--	--	peak
12	5350.000	51.64	-0.08	51.56	74.00	-22.44	peak
13	5367.900	52.11	-0.05	52.06	74.00	-21.94	peak
14	5367.900	40.04	-0.05	39.99	54.00	-14.01	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

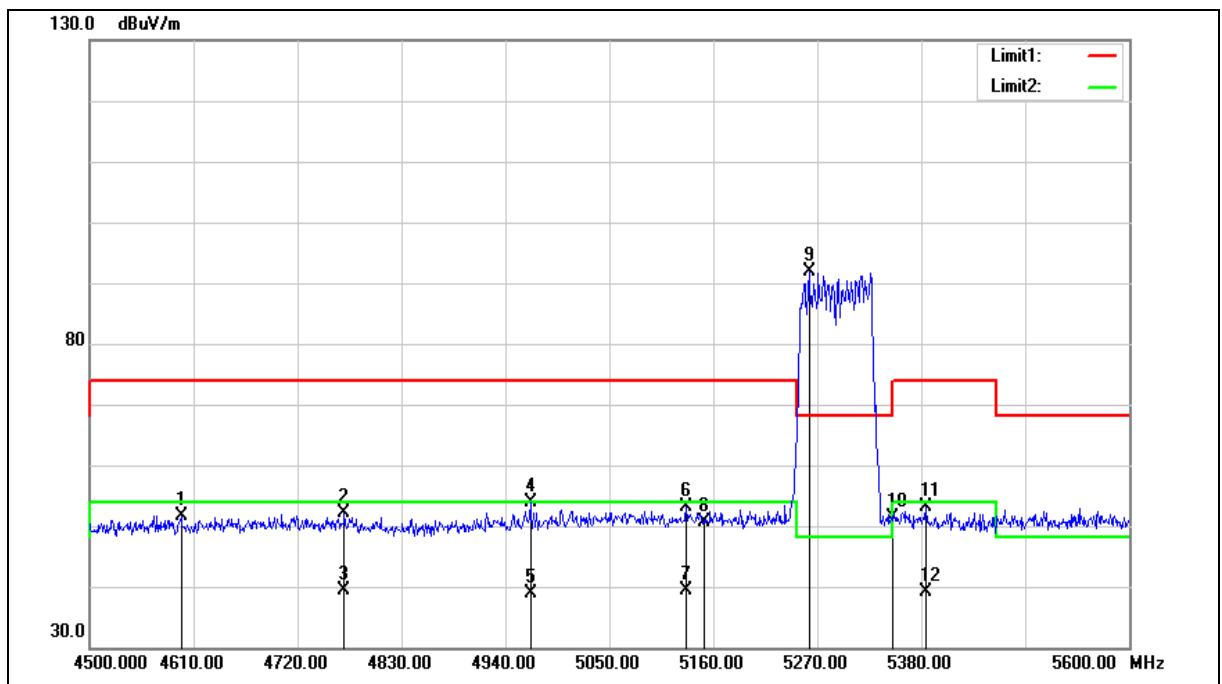

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4596.800	53.61	-1.88	51.73	74.00	-22.27	peak
2	4769.500	53.58	-1.40	52.18	74.00	-21.82	peak
3	4769.500	40.68	-1.40	39.28	54.00	-14.72	AVG
4	4966.400	54.68	-0.87	53.81	74.00	-20.19	peak
5	4966.400	39.77	-0.87	38.90	54.00	-15.10	AVG
6	5131.400	53.62	-0.51	53.11	74.00	-20.89	peak
7	5131.400	39.89	-0.51	39.38	54.00	-14.62	AVG
8	5150.000	51.06	-0.48	50.58	74.00	-23.42	peak
9	5261.200	92.09	-0.25	91.84	--	--	peak
10	5350.000	51.41	-0.08	51.33	74.00	-22.67	peak
11	5385.500	53.11	0.00	53.11	74.00	-20.89	peak
12	5385.500	39.06	0.00	39.06	54.00	-14.94	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

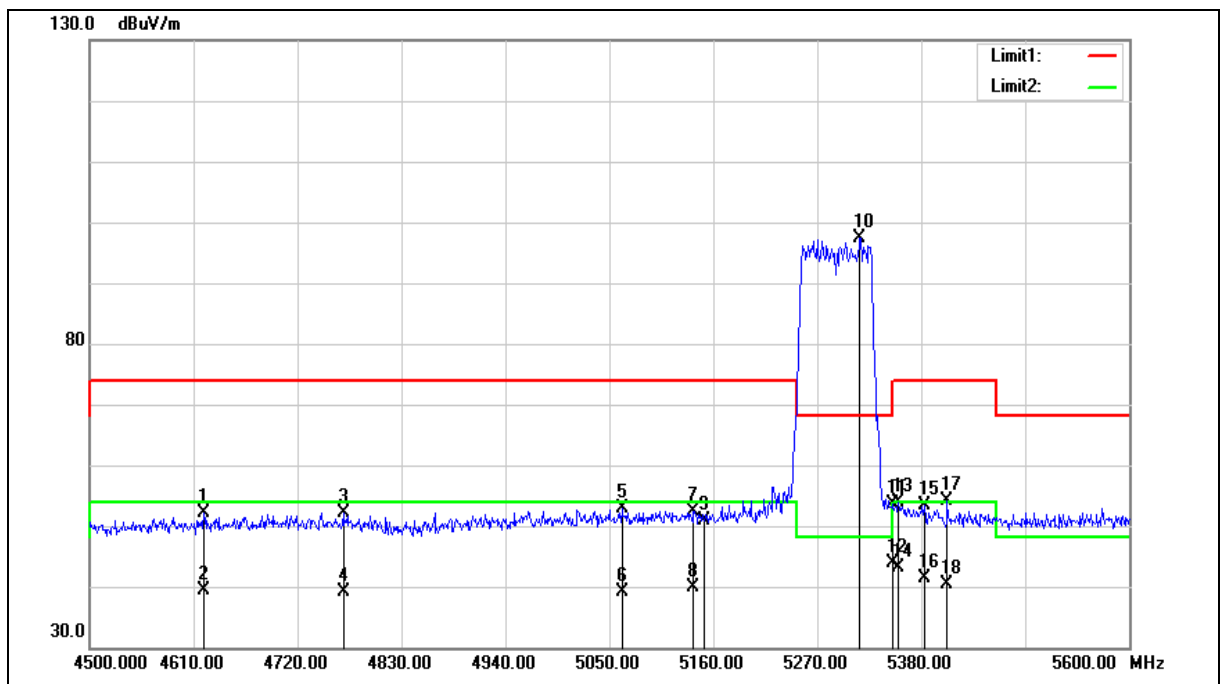

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4621.000	53.89	-1.81	52.08	74.00	-21.92	peak
2	4621.000	41.21	-1.81	39.40	54.00	-14.60	AVG
3	4768.400	53.60	-1.41	52.19	74.00	-21.81	peak
4	4768.400	40.64	-1.41	39.23	54.00	-14.77	AVG
5	5063.200	53.59	-0.65	52.94	74.00	-21.06	peak
6	5063.200	39.82	-0.65	39.17	54.00	-14.83	AVG
7	5139.100	52.97	-0.49	52.48	74.00	-21.52	peak
8	5139.100	40.31	-0.49	39.82	54.00	-14.18	AVG
9	5150.000	51.35	-0.48	50.87	74.00	-23.13	peak
10	5315.100	97.63	-0.15	97.48	--	--	peak
11	5350.000	53.70	-0.08	53.62	74.00	-20.38	peak
12	5350.000	43.97	-0.08	43.89	54.00	-10.11	AVG
13	5355.800	53.96	-0.07	53.89	74.00	-20.11	peak
14	5355.800	43.27	-0.07	43.20	54.00	-10.80	AVG
15	5383.300	53.32	-0.02	53.30	74.00	-20.70	peak
16	5383.300	41.34	-0.02	41.32	54.00	-12.68	AVG
17	5407.500	54.14	0.04	54.18	74.00	-19.82	peak
18	5407.500	40.25	0.04	40.29	54.00	-13.71	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

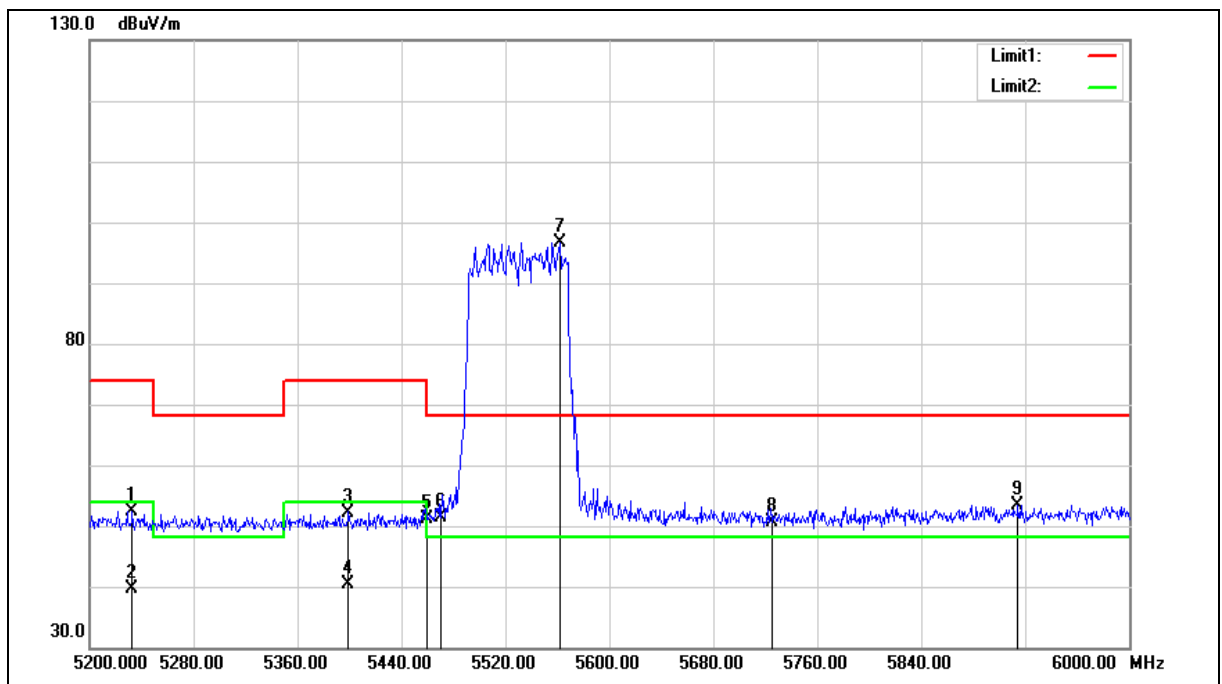

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5232.800	52.77	-0.31	52.46	74.00	-21.54	peak
2	5232.800	40.02	-0.31	39.71	54.00	-14.29	AVG
3	5399.200	52.23	0.02	52.25	74.00	-21.75	peak
4	5399.200	40.29	0.02	40.31	54.00	-13.69	AVG
5	5460.000	51.10	0.14	51.24	74.00	-22.76	peak
6	5470.000	51.25	0.16	51.41	68.20	-16.79	peak
7	5562.400	96.34	0.39	96.73	--	--	peak
8	5725.000	49.79	0.82	50.61	68.20	-17.59	peak
9	5914.400	52.14	1.33	53.47	68.20	-14.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

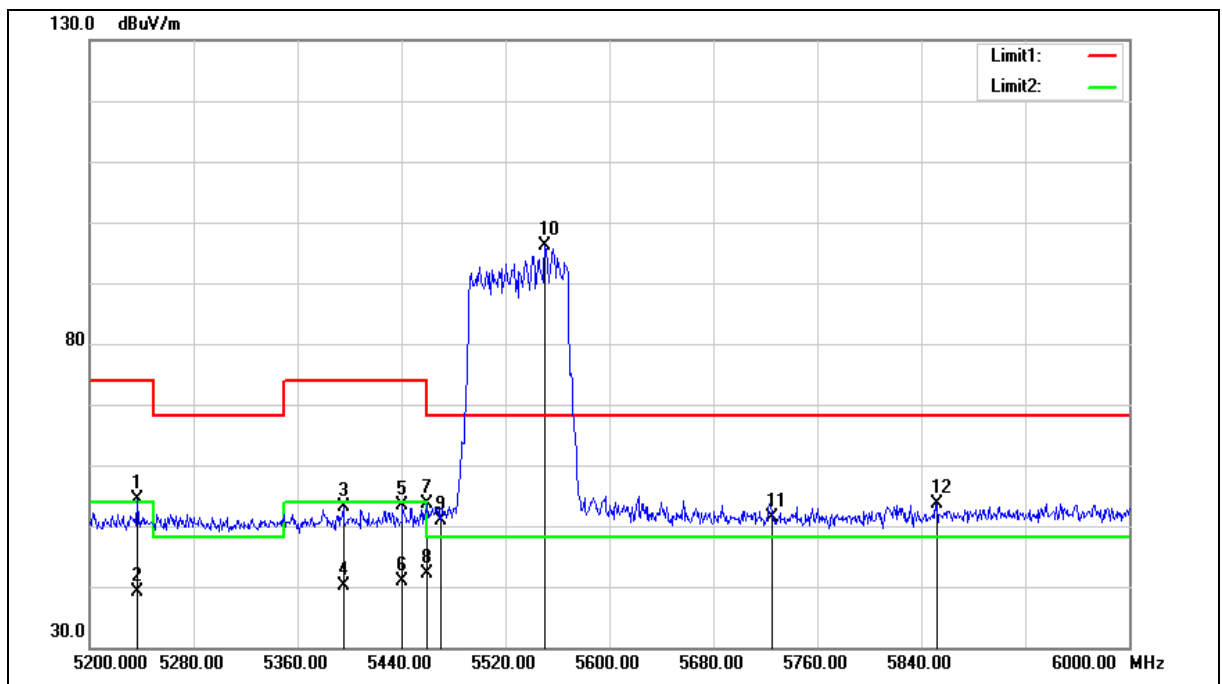

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5236.800	54.57	-0.31	54.26	74.00	-19.74	peak
2	5236.800	39.53	-0.31	39.22	54.00	-14.78	AVG
3	5395.200	53.15	0.01	53.16	74.00	-20.84	peak
4	5395.200	40.02	0.01	40.03	54.00	-13.97	AVG
5	5440.800	53.41	0.09	53.50	74.00	-20.50	peak
6	5440.800	40.78	0.09	40.87	54.00	-13.13	AVG
7	5460.000	53.60	0.14	53.74	74.00	-20.26	peak
8	5460.000	42.05	0.14	42.19	54.00	-11.81	AVG
9	5470.000	50.81	0.16	50.97	68.20	-17.23	peak
10	5550.400	95.71	0.35	96.06	--	--	peak
11	5725.000	50.67	0.82	51.49	68.20	-16.71	peak
12	5852.000	52.55	1.17	53.72	68.20	-14.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

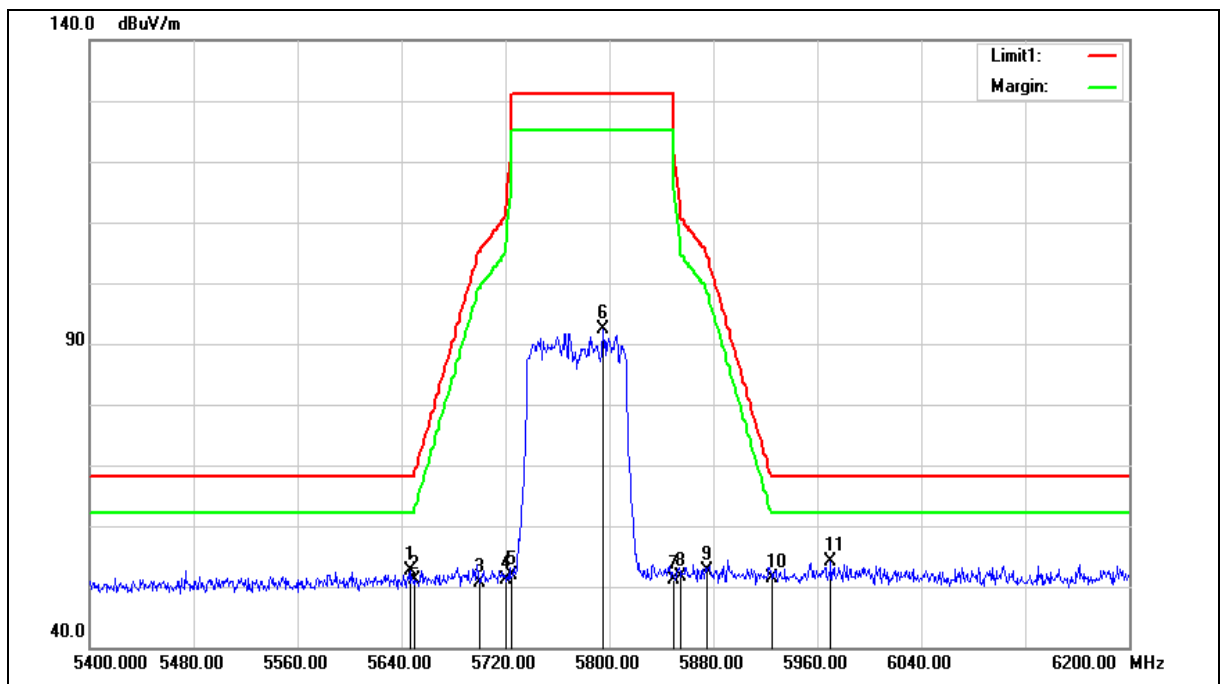

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5647.200	52.05	0.62	52.67	68.20	-15.53	peak
2	5650.000	50.59	0.62	51.21	68.20	-16.99	peak
3	5700.000	49.98	0.75	50.73	105.20	-54.47	peak
4	5720.000	50.28	0.81	51.09	110.80	-59.71	peak
5	5725.000	51.08	0.82	51.90	122.20	-70.30	peak
6	5795.200	91.41	1.01	92.42	--	--	peak
7	5850.000	50.05	1.17	51.22	122.20	-70.98	peak
8	5855.000	50.48	1.18	51.66	110.80	-59.14	peak
9	5875.000	51.47	1.23	52.70	105.20	-52.50	peak
10	5925.000	50.07	1.37	51.44	68.20	-16.76	peak
11	5970.400	52.71	1.49	54.20	68.20	-14.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

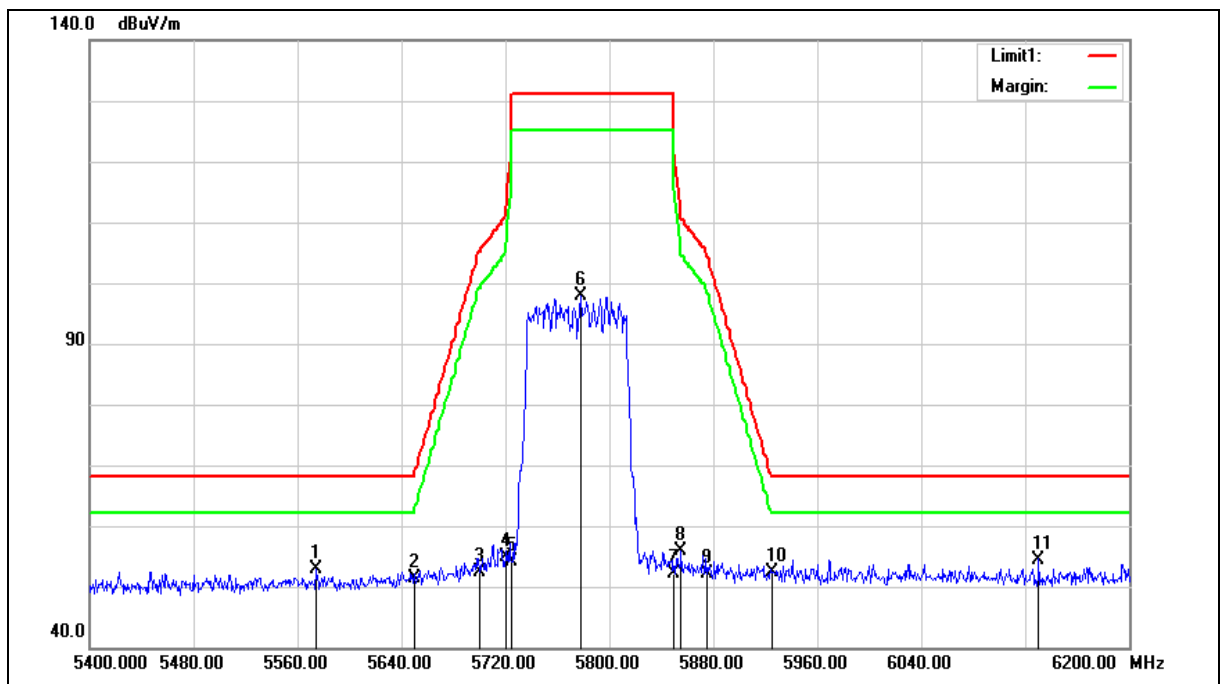

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5574.400	52.56	0.42	52.98	68.20	-15.22	peak
2	5650.000	50.64	0.62	51.26	68.20	-16.94	peak
3	5700.000	51.57	0.75	52.32	105.20	-52.88	peak
4	5720.000	54.04	0.81	54.85	110.80	-55.95	peak
5	5725.000	53.35	0.82	54.17	122.20	-68.03	peak
6	5777.600	96.94	0.97	97.91	--	--	peak
7	5850.000	50.97	1.17	52.14	122.20	-70.06	peak
8	5855.000	54.59	1.18	55.77	110.80	-55.03	peak
9	5875.000	50.94	1.23	52.17	105.20	-53.03	peak
10	5925.000	51.02	1.37	52.39	68.20	-15.81	peak
11	6130.400	52.47	2.03	54.50	68.20	-13.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

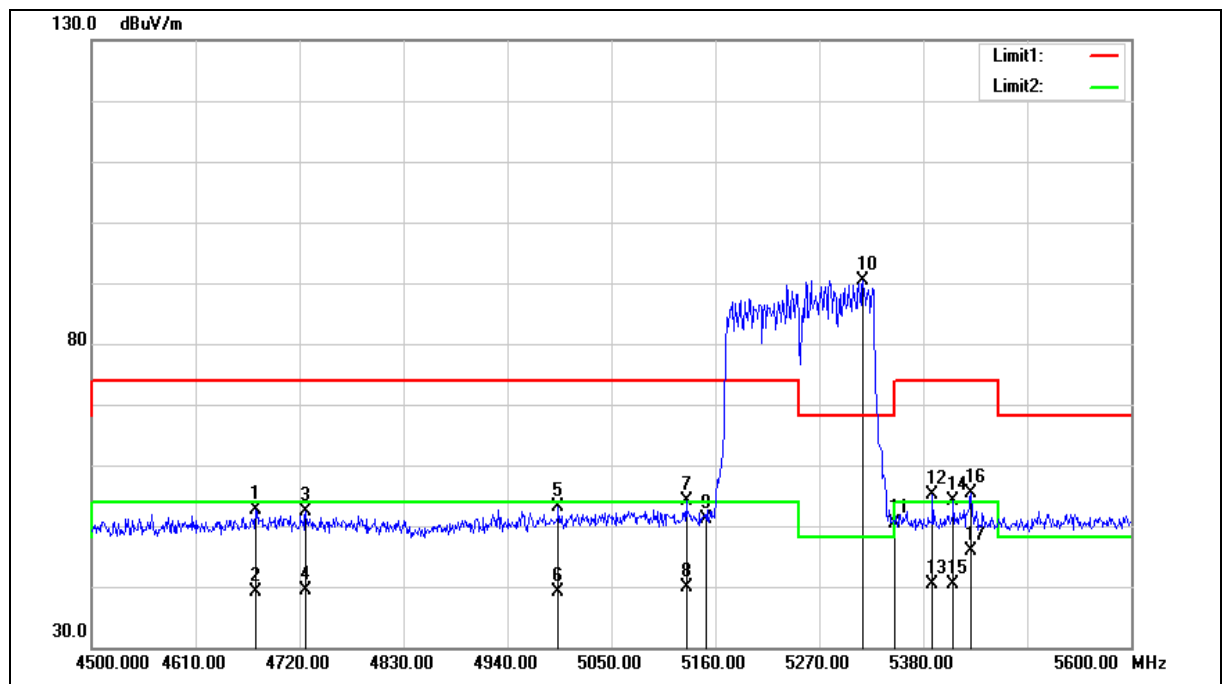

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4673.800	54.18	-1.67	52.51	74.00	-21.49	peak
2	4673.800	40.92	-1.67	39.25	54.00	-14.75	AVG
3	4726.600	53.84	-1.52	52.32	74.00	-21.68	peak
4	4726.600	40.93	-1.52	39.41	54.00	-14.59	AVG
5	4993.900	53.84	-0.78	53.06	74.00	-20.94	peak
6	4993.900	39.88	-0.78	39.10	54.00	-14.90	AVG
7	5129.200	54.68	-0.52	54.16	74.00	-19.84	peak
8	5129.200	40.44	-0.52	39.92	54.00	-14.08	AVG
9	5150.000	51.64	-0.48	51.16	74.00	-22.84	peak
10	5316.200	90.56	-0.15	90.41	--	--	peak
11	5350.000	50.42	-0.08	50.34	74.00	-23.66	peak
12	5389.900	55.10	0.00	55.10	74.00	-18.90	peak
13	5389.900	40.30	0.00	40.30	54.00	-13.70	AVG
14	5411.900	53.98	0.04	54.02	74.00	-19.98	peak
15	5411.900	40.28	0.04	40.32	54.00	-13.68	AVG
16	5430.600	55.29	0.08	55.37	74.00	-18.63	peak
17	5430.600	45.79	0.08	45.87	54.00	-8.13	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

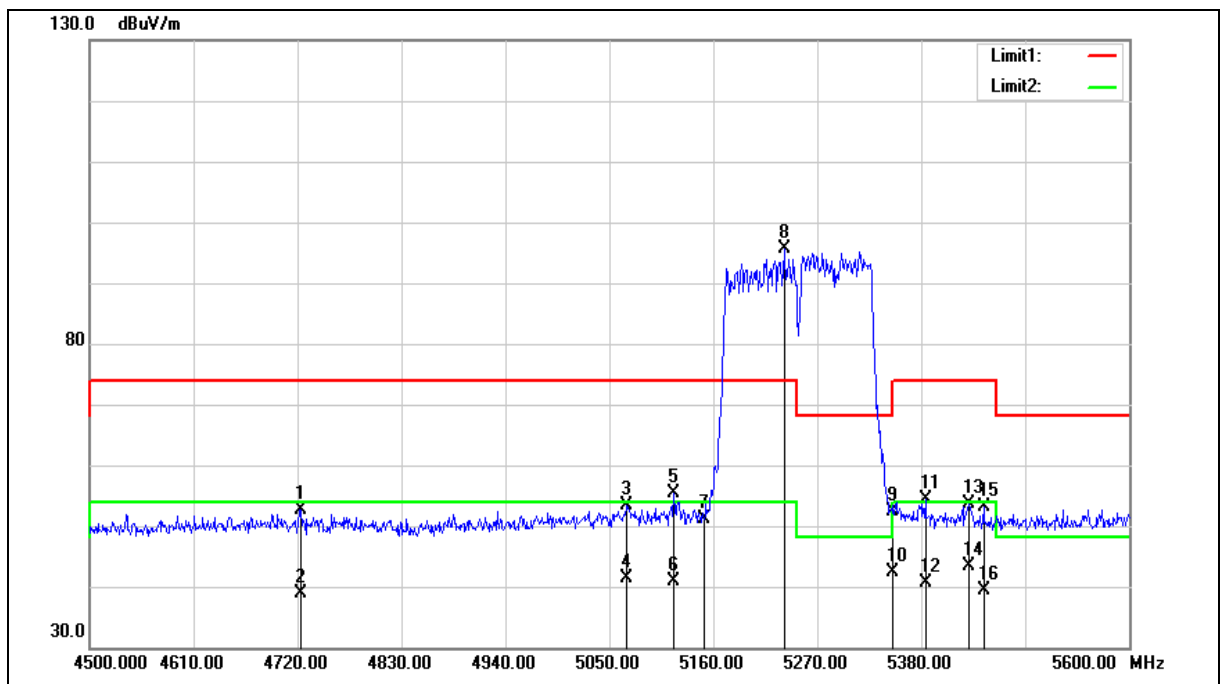

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4723.300	54.26	-1.53	52.73	74.00	-21.27	peak
2	4723.300	40.29	-1.53	38.76	54.00	-15.24	AVG
3	5068.700	54.05	-0.64	53.41	74.00	-20.59	peak
4	5068.700	41.94	-0.64	41.30	54.00	-12.70	AVG
5	5118.200	55.89	-0.54	55.35	74.00	-18.65	peak
6	5118.200	41.37	-0.54	40.83	54.00	-13.17	AVG
7	5150.000	51.71	-0.48	51.23	74.00	-22.77	peak
8	5234.800	95.88	-0.31	95.57	--	--	peak
9	5350.000	52.46	-0.08	52.38	74.00	-21.62	peak
10	5350.000	42.47	-0.08	42.39	54.00	-11.61	AVG
11	5384.400	54.32	-0.01	54.31	74.00	-19.69	peak
12	5384.400	40.75	-0.01	40.74	54.00	-13.26	AVG
13	5430.600	53.65	0.08	53.73	74.00	-20.27	peak
14	5430.600	43.27	0.08	43.35	54.00	-10.65	AVG
15	5446.000	53.07	0.11	53.18	74.00	-20.82	peak
16	5446.000	39.22	0.11	39.33	54.00	-14.67	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

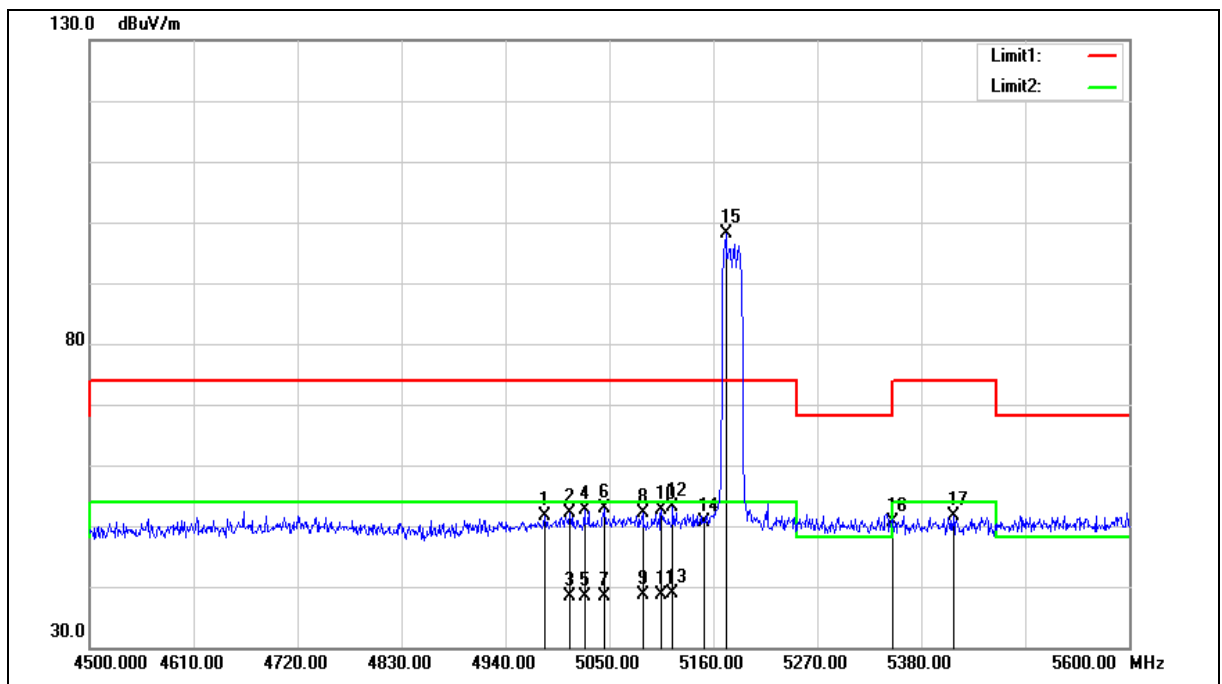

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4981.800	52.35	-0.82	51.53	74.00	-22.47	peak
2	5008.200	52.82	-0.75	52.07	74.00	-21.93	peak
3	5008.200	39.17	-0.75	38.42	54.00	-15.58	AVG
4	5023.600	53.23	-0.72	52.51	74.00	-21.49	peak
5	5023.600	39.20	-0.72	38.48	54.00	-15.52	AVG
6	5044.500	53.51	-0.68	52.83	74.00	-21.17	peak
7	5044.500	39.18	-0.68	38.50	54.00	-15.50	AVG
8	5085.200	52.67	-0.60	52.07	74.00	-21.93	peak
9	5085.200	39.12	-0.60	38.52	54.00	-15.48	AVG
10	5105.000	53.08	-0.57	52.51	74.00	-21.49	peak
11	5105.000	39.11	-0.57	38.54	54.00	-15.46	AVG
12	5117.100	53.56	-0.54	53.02	74.00	-20.98	peak
13	5117.100	39.31	-0.54	38.77	54.00	-15.23	AVG
14	5150.000	51.14	-0.48	50.66	74.00	-23.34	peak
15	5173.200	98.54	-0.43	98.11	--	--	peak
16	5350.000	50.82	-0.08	50.74	74.00	-23.26	peak
17	5414.100	51.69	0.05	51.74	74.00	-22.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

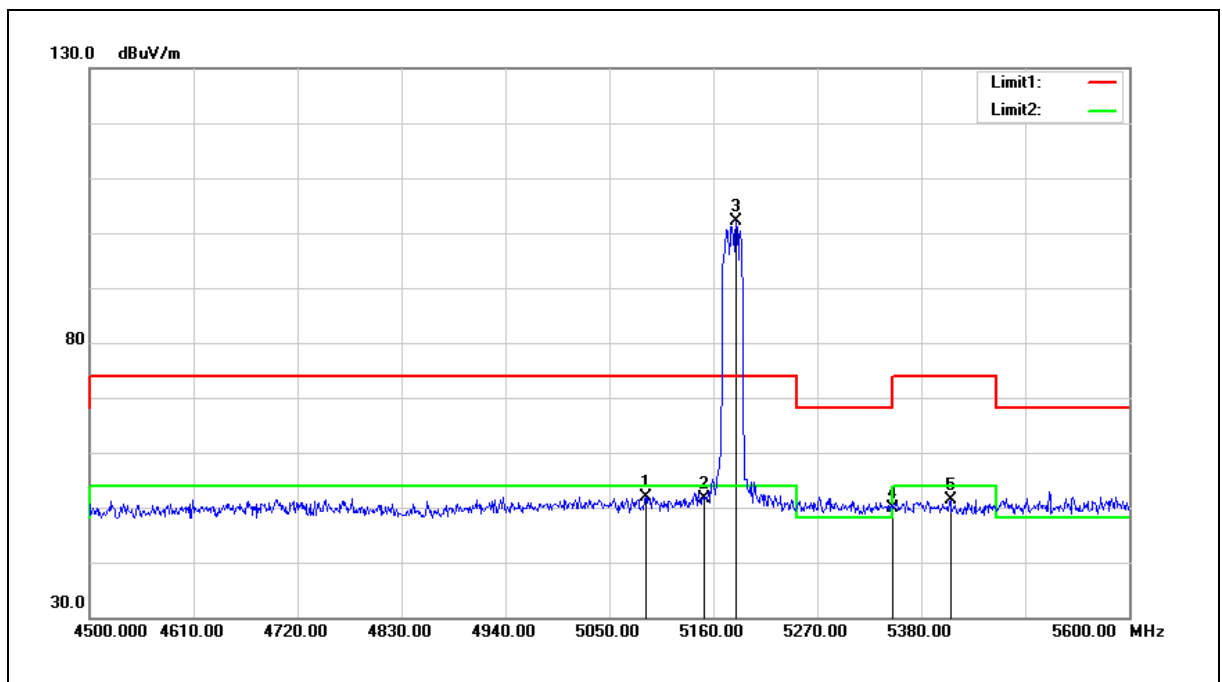


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5088.500	52.56	-0.60	51.96	74.00	-22.04	peak
2	5150.000	52.23	-0.48	51.75	74.00	-22.25	peak
3	5184.200	102.50	-0.40	102.10	--	--	peak
4	5350.000	49.96	-0.08	49.88	74.00	-24.12	peak
5	5410.800	51.28	0.04	51.32	74.00	-22.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

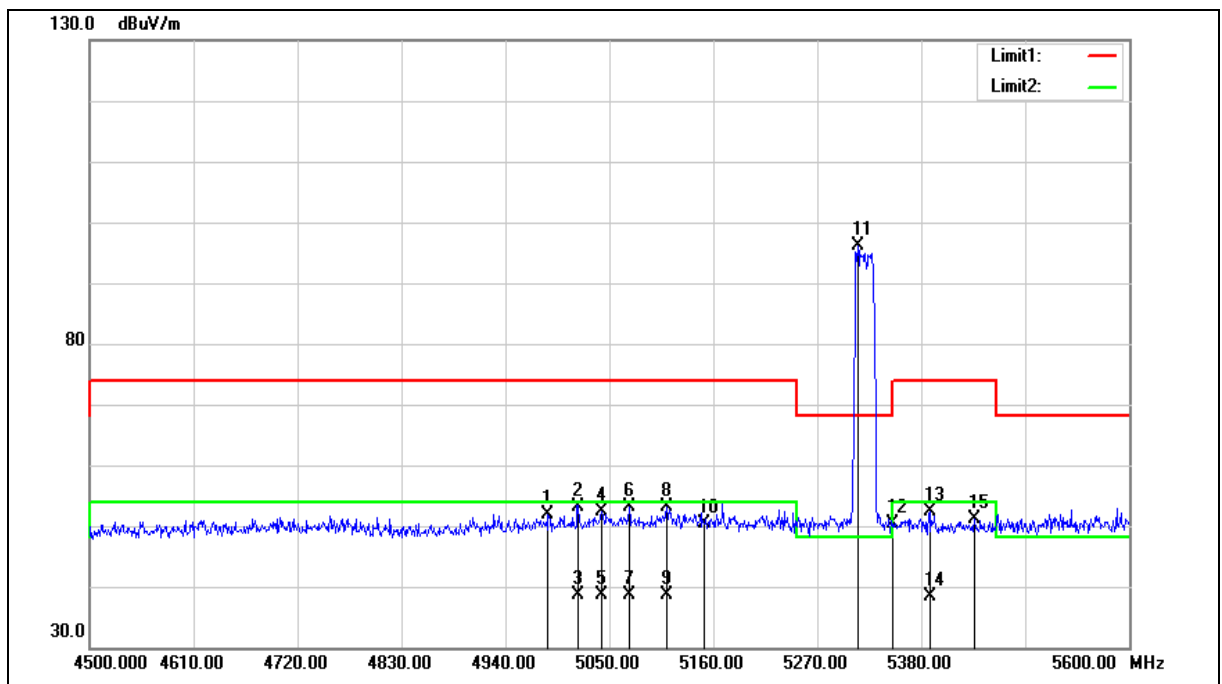

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4985.100	52.70	-0.82	51.88	74.00	-22.12	peak
2	5017.000	53.99	-0.74	53.25	74.00	-20.75	peak
3	5017.000	39.29	-0.74	38.55	54.00	-15.45	AVG
4	5041.200	53.03	-0.69	52.34	74.00	-21.66	peak
5	5041.200	39.22	-0.69	38.53	54.00	-15.47	AVG
6	5070.900	53.64	-0.63	53.01	74.00	-20.99	peak
7	5070.900	39.19	-0.63	38.56	54.00	-15.44	AVG
8	5110.500	53.76	-0.55	53.21	74.00	-20.79	peak
9	5110.500	39.10	-0.55	38.55	54.00	-15.45	AVG
10	5150.000	50.95	-0.48	50.47	74.00	-23.53	peak
11	5312.900	96.23	-0.15	96.08	--	--	peak
12	5350.000	50.53	-0.08	50.45	74.00	-23.55	peak
13	5388.800	52.33	0.00	52.33	74.00	-21.67	peak
14	5388.800	38.49	0.00	38.49	54.00	-15.51	AVG
15	5436.100	50.92	0.09	51.01	74.00	-22.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

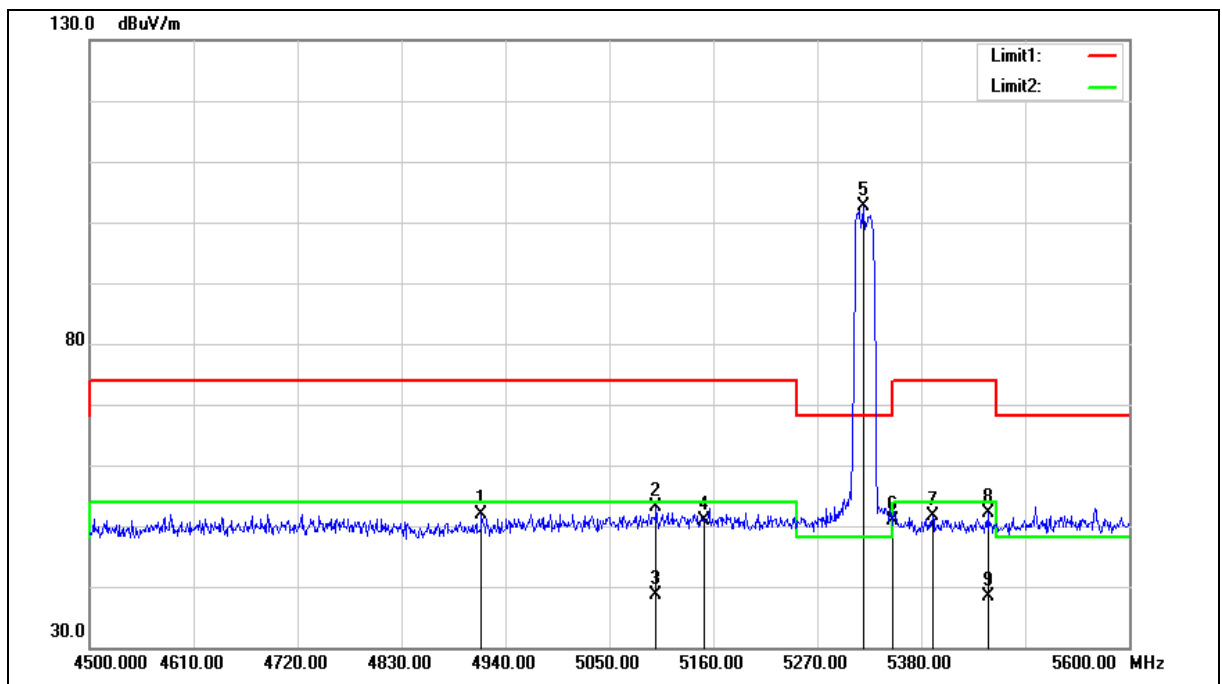

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4914.700	52.98	-1.00	51.98	74.00	-22.02	peak
2	5099.500	53.59	-0.57	53.02	74.00	-20.98	peak
3	5099.500	39.11	-0.57	38.54	54.00	-15.46	AVG
4	5150.000	51.38	-0.48	50.90	74.00	-23.10	peak
5	5318.400	102.85	-0.15	102.70	--	--	peak
6	5350.000	50.98	-0.08	50.90	74.00	-23.10	peak
7	5392.100	51.54	0.00	51.54	74.00	-22.46	peak
8	5450.400	51.94	0.12	52.06	74.00	-21.94	peak
9	5450.400	38.29	0.12	38.41	54.00	-15.59	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

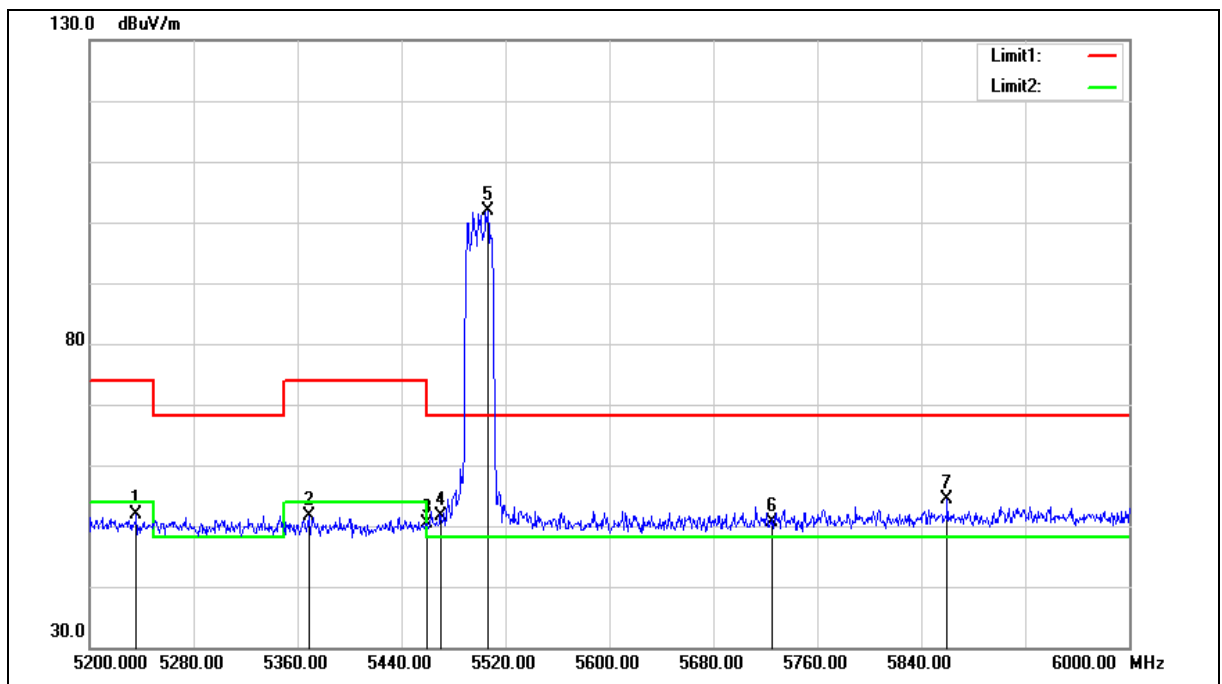

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5236.000	52.08	-0.31	51.77	74.00	-22.23	peak
2	5368.800	51.78	-0.04	51.74	74.00	-22.26	peak
3	5460.000	50.16	0.14	50.30	74.00	-23.70	peak
4	5470.000	51.50	0.16	51.66	68.20	-16.54	peak
5	5506.400	101.69	0.23	101.92	--	--	peak
6	5725.000	49.70	0.82	50.52	68.20	-17.68	peak
7	5860.000	53.18	1.19	54.37	68.20	-13.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

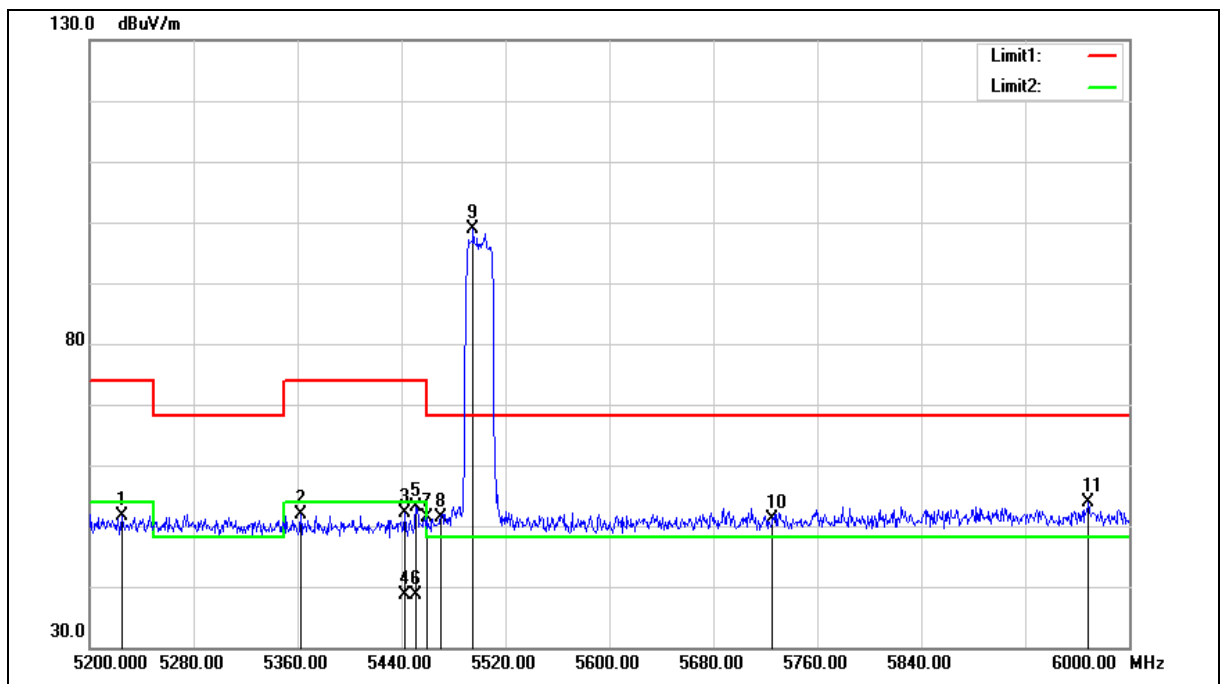

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5224.800	52.05	-0.32	51.73	74.00	-22.27	peak
2	5362.400	52.05	-0.06	51.99	74.00	-22.01	peak
3	5442.400	52.11	0.10	52.21	74.00	-21.79	peak
4	5442.400	38.43	0.10	38.53	54.00	-15.47	AVG
5	5451.200	52.92	0.12	53.04	74.00	-20.96	peak
6	5451.200	38.60	0.12	38.72	54.00	-15.28	AVG
7	5460.000	51.14	0.14	51.28	74.00	-22.72	peak
8	5470.000	51.22	0.16	51.38	68.20	-16.82	peak
9	5495.200	98.76	0.21	98.97	--	--	peak
10	5725.000	50.36	0.82	51.18	68.20	-17.02	peak
11	5968.800	52.31	1.49	53.80	68.20	-14.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

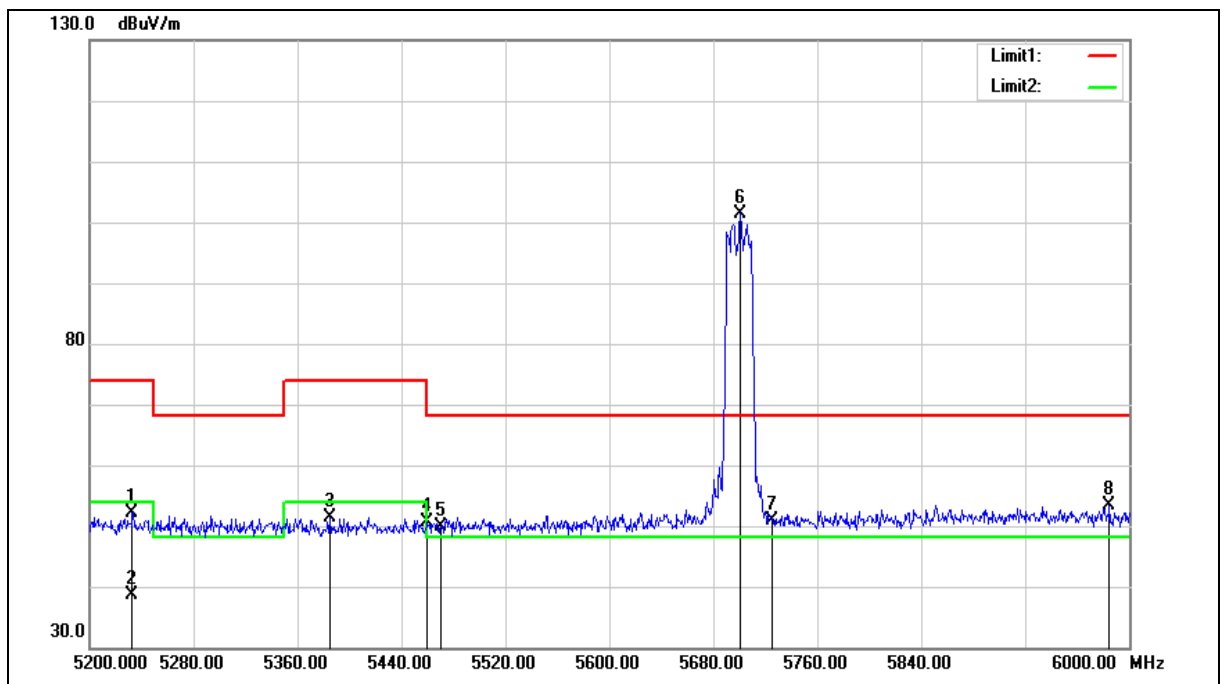

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5232.800	52.37	-0.31	52.06	74.00	-21.94	peak
2	5232.800	38.91	-0.31	38.60	54.00	-15.40	AVG
3	5384.800	51.41	-0.01	51.40	74.00	-22.60	peak
4	5460.000	50.55	0.14	50.69	74.00	-23.31	peak
5	5470.000	49.75	0.16	49.91	68.20	-18.29	peak
6	5700.800	100.57	0.75	101.32	--	--	peak
7	5725.000	50.17	0.82	50.99	68.20	-17.21	peak
8	5984.800	51.96	1.53	53.49	68.20	-14.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

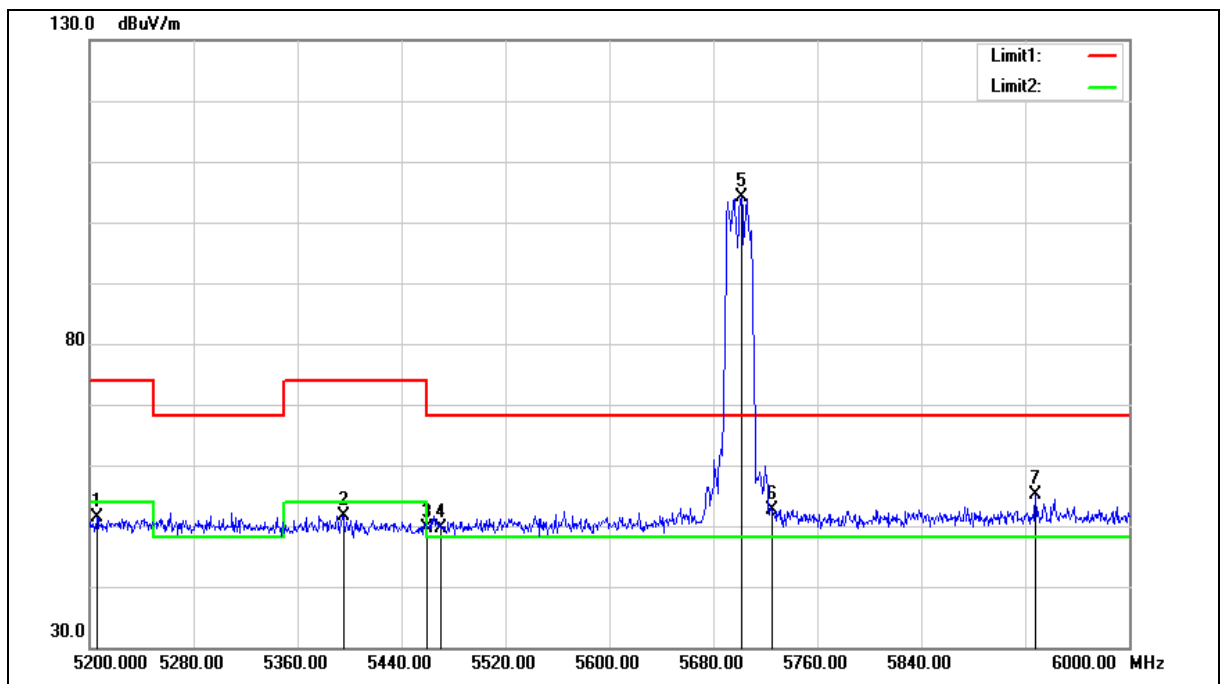

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5205.600	51.64	-0.37	51.27	74.00	-22.73	peak
2	5395.200	51.66	0.01	51.67	74.00	-22.33	peak
3	5460.000	49.41	0.14	49.55	74.00	-24.45	peak
4	5470.000	49.52	0.16	49.68	68.20	-18.52	peak
5	5701.600	103.45	0.75	104.20	--	--	peak
6	5725.000	51.80	0.82	52.62	68.20	-15.58	peak
7	5928.000	53.72	1.37	55.09	68.20	-13.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

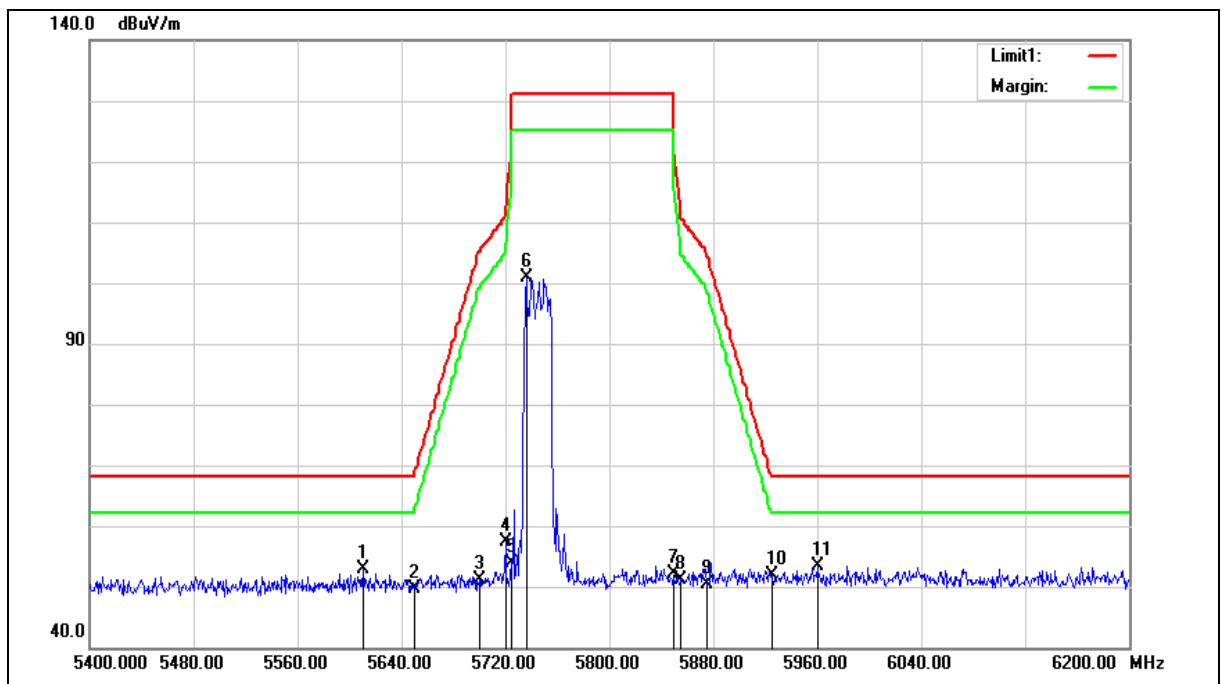

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5610.400	52.46	0.52	52.98	68.20	-15.22	peak
2	5650.000	48.92	0.62	49.54	68.20	-18.66	peak
3	5700.000	50.43	0.75	51.18	105.20	-54.02	peak
4	5720.000	56.61	0.81	57.42	110.80	-53.38	peak
5	5725.000	53.17	0.82	53.99	122.20	-68.21	peak
6	5736.000	100.04	0.86	100.90	--	--	peak
7	5850.000	50.92	1.17	52.09	122.20	-70.11	peak
8	5855.000	49.93	1.18	51.11	110.80	-59.69	peak
9	5875.000	49.15	1.23	50.38	105.20	-54.82	peak
10	5925.000	50.60	1.37	51.97	68.20	-16.23	peak
11	5960.000	51.91	1.46	53.37	68.20	-14.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

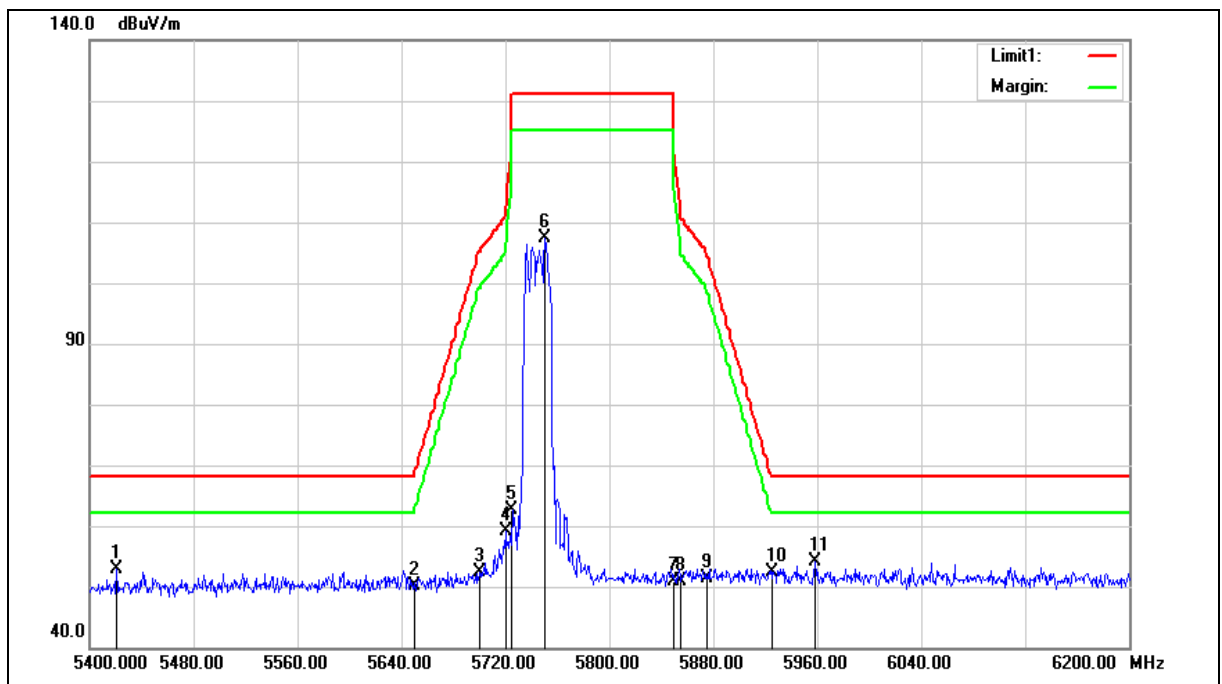

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5420.800	52.89	0.06	52.95	68.20	-15.25	peak
2	5650.000	49.41	0.62	50.03	68.20	-18.17	peak
3	5700.000	51.58	0.75	52.33	105.20	-52.87	peak
4	5720.000	58.33	0.81	59.14	110.80	-51.66	peak
5	5725.000	61.77	0.82	62.59	122.20	-59.61	peak
6	5750.400	106.38	0.90	107.28	--	--	peak
7	5850.000	49.80	1.17	50.97	122.20	-71.23	peak
8	5855.000	49.79	1.18	50.97	110.80	-59.83	peak
9	5875.000	50.08	1.23	51.31	105.20	-53.89	peak
10	5925.000	51.09	1.37	52.46	68.20	-15.74	peak
11	5958.400	52.68	1.45	54.13	68.20	-14.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

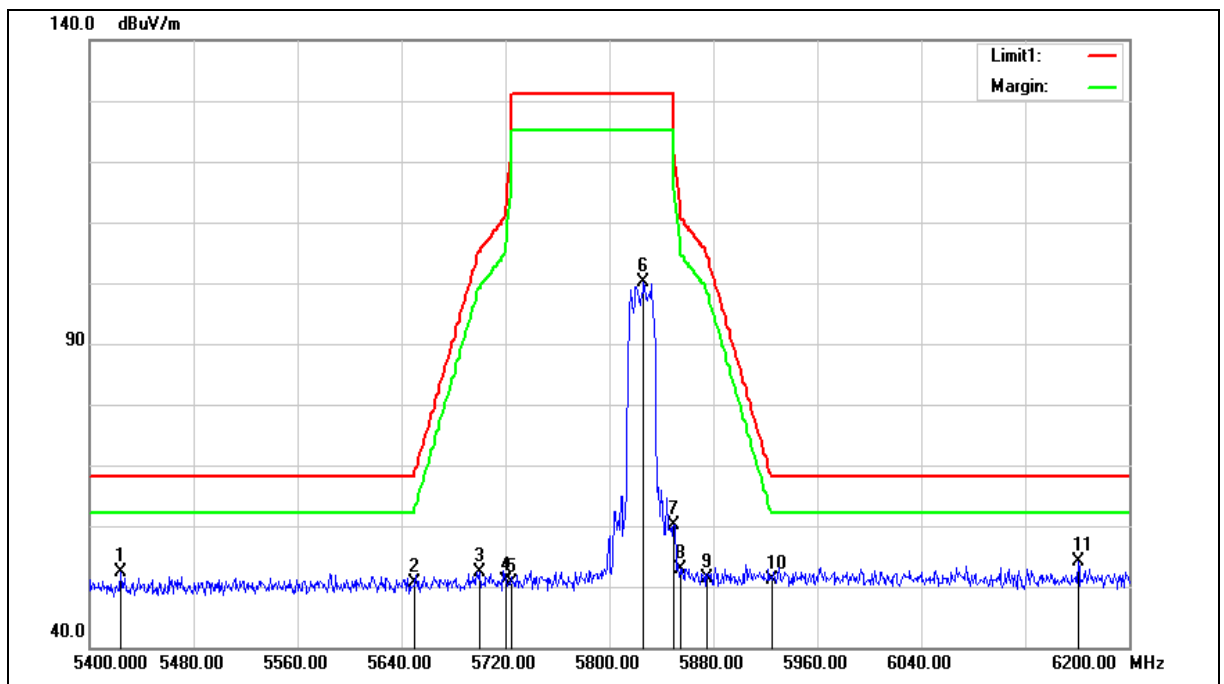

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5424.000	52.26	0.06	52.32	68.20	-15.88	peak
2	5650.000	50.10	0.62	50.72	68.20	-17.48	peak
3	5700.000	51.58	0.75	52.33	105.20	-52.87	peak
4	5720.000	50.07	0.81	50.88	110.80	-59.92	peak
5	5725.000	49.72	0.82	50.54	122.20	-71.66	peak
6	5826.400	98.92	1.10	100.02	--	--	peak
7	5850.000	59.04	1.17	60.21	122.20	-61.99	peak
8	5855.000	51.60	1.18	52.78	110.80	-58.02	peak
9	5875.000	50.18	1.23	51.41	105.20	-53.79	peak
10	5925.000	49.66	1.37	51.03	68.20	-17.17	peak
11	6160.800	52.00	2.14	54.14	68.20	-14.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

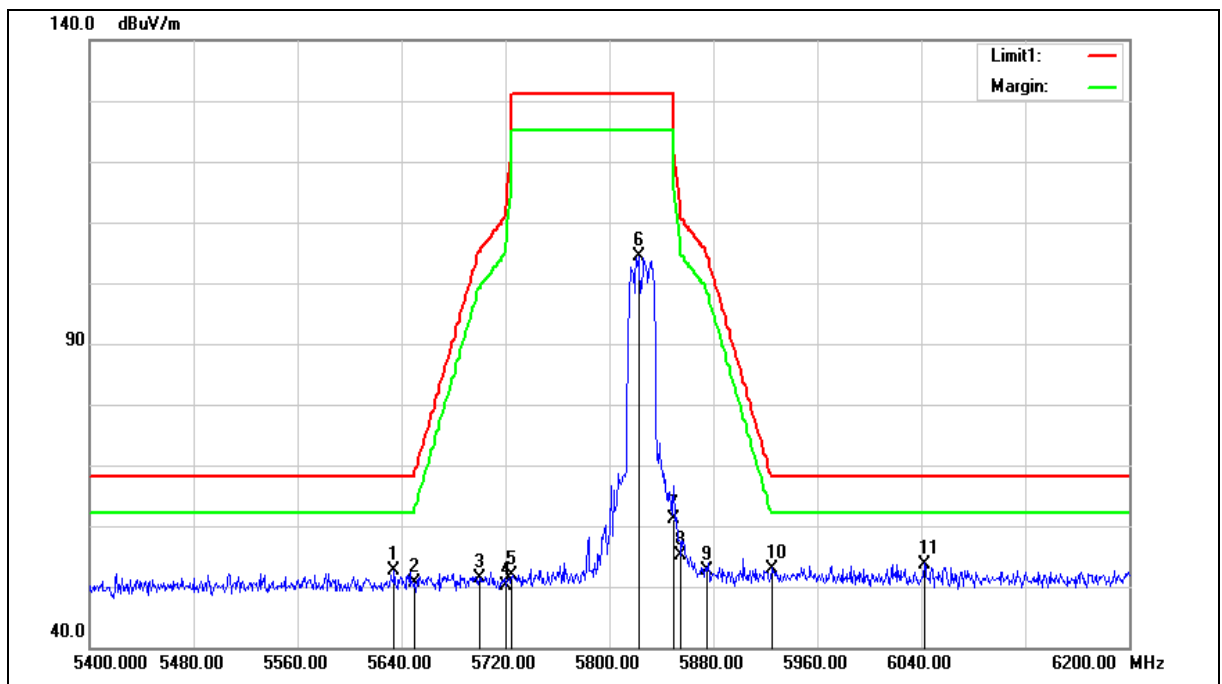

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5634.400	52.11	0.59	52.70	68.20	-15.50	peak
2	5650.000	49.95	0.62	50.57	68.20	-17.63	peak
3	5700.000	50.52	0.75	51.27	105.20	-53.93	peak
4	5720.000	49.20	0.81	50.01	110.80	-60.79	peak
5	5725.000	51.18	0.82	52.00	122.20	-70.20	peak
6	5822.400	103.31	1.10	104.41	--	--	peak
7	5850.000	60.00	1.17	61.17	122.20	-61.03	peak
8	5855.000	53.92	1.18	55.10	110.80	-55.70	peak
9	5875.000	51.45	1.23	52.68	105.20	-52.52	peak
10	5925.000	51.41	1.37	52.78	68.20	-15.42	peak
11	6042.400	52.03	1.72	53.75	68.20	-14.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

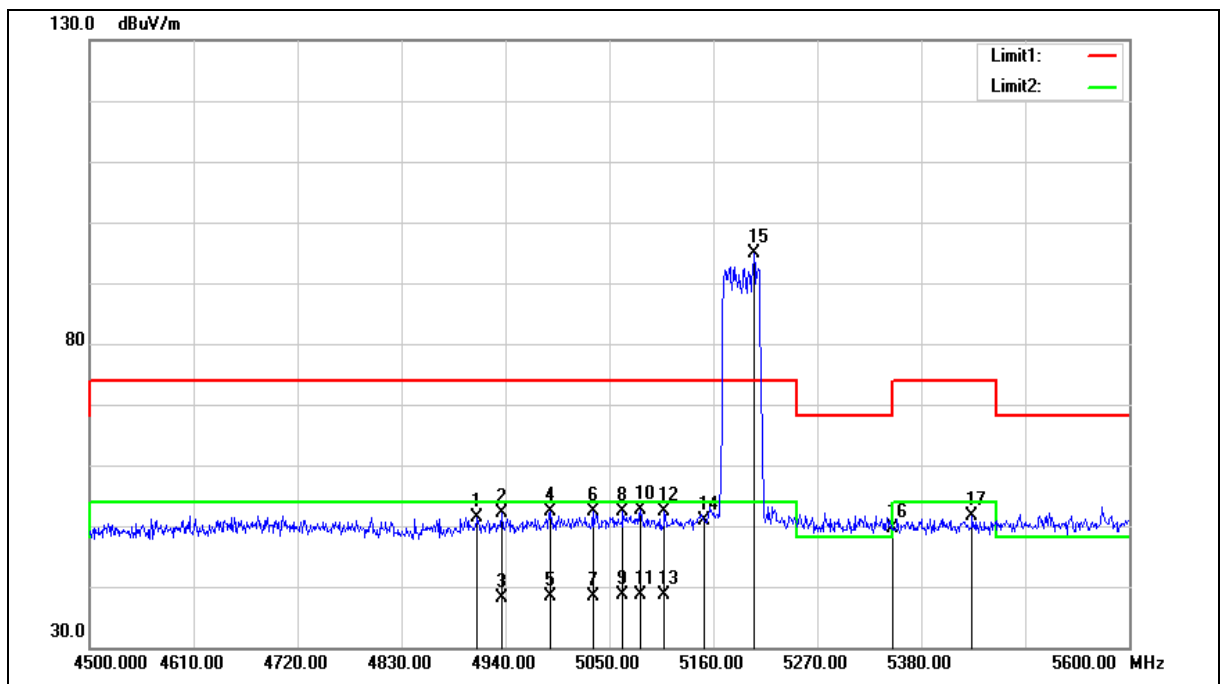

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4910.300	52.45	-1.01	51.44	74.00	-22.56	peak
2	4935.600	53.20	-0.95	52.25	74.00	-21.75	peak
3	4935.600	39.19	-0.95	38.24	54.00	-15.76	AVG
4	4987.300	53.12	-0.81	52.31	74.00	-21.69	peak
5	4987.300	39.27	-0.81	38.46	54.00	-15.54	AVG
6	5032.400	53.01	-0.70	52.31	74.00	-21.69	peak
7	5032.400	39.16	-0.70	38.46	54.00	-15.54	AVG
8	5064.300	53.03	-0.65	52.38	74.00	-21.62	peak
9	5064.300	39.21	-0.65	38.56	54.00	-15.44	AVG
10	5083.000	53.26	-0.60	52.66	74.00	-21.34	peak
11	5083.000	39.25	-0.60	38.65	54.00	-15.35	AVG
12	5108.300	53.01	-0.56	52.45	74.00	-21.55	peak
13	5108.300	39.31	-0.56	38.75	54.00	-15.25	AVG
14	5150.000	51.28	-0.48	50.80	74.00	-23.20	peak
15	5202.900	95.34	-0.37	94.97	--	--	peak
16	5350.000	49.74	-0.08	49.66	74.00	-24.34	peak
17	5433.900	51.63	0.09	51.72	74.00	-22.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

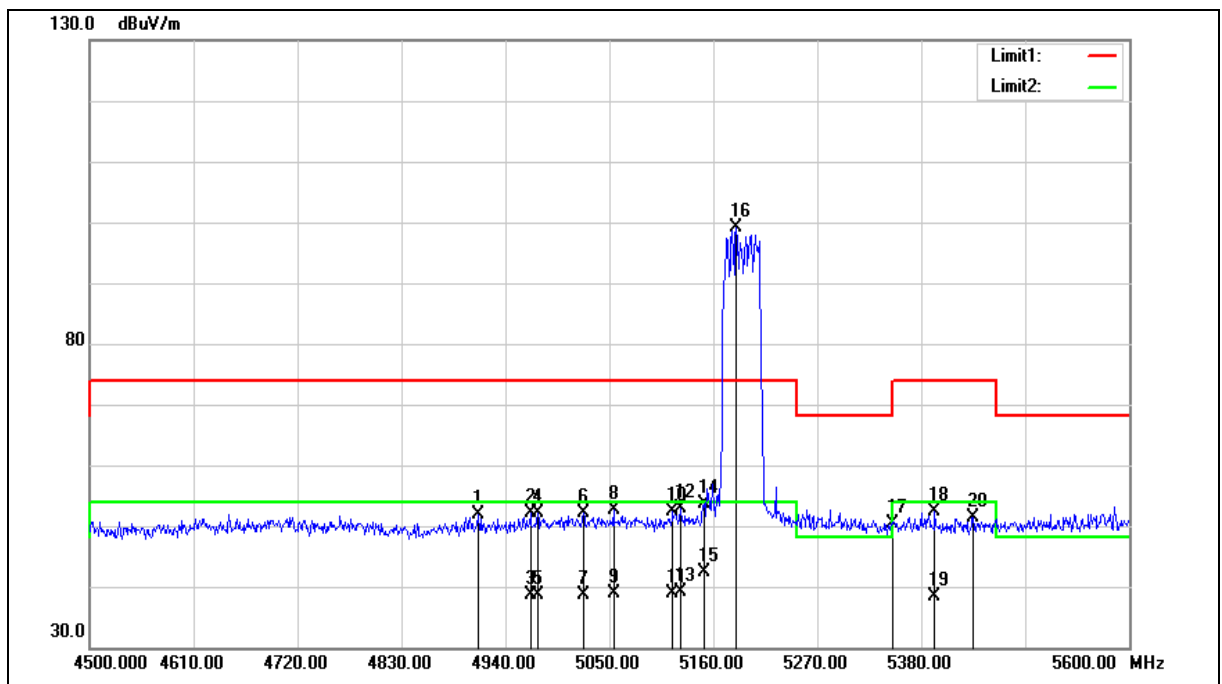

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4911.400	52.92	-1.01	51.91	74.00	-22.09	peak
2	4966.400	52.94	-0.87	52.07	74.00	-21.93	peak
3	4966.400	39.39	-0.87	38.52	54.00	-15.48	AVG
4	4974.100	52.87	-0.84	52.03	74.00	-21.97	peak
5	4974.100	39.36	-0.84	38.52	54.00	-15.48	AVG
6	5022.500	52.87	-0.72	52.15	74.00	-21.85	peak
7	5022.500	39.39	-0.72	38.67	54.00	-15.33	AVG
8	5054.400	53.41	-0.66	52.75	74.00	-21.25	peak
9	5054.400	39.42	-0.66	38.76	54.00	-15.24	AVG
10	5117.100	52.81	-0.54	52.27	74.00	-21.73	peak
11	5117.100	39.43	-0.54	38.89	54.00	-15.11	AVG
12	5124.800	53.48	-0.52	52.96	74.00	-21.04	peak
13	5124.800	39.59	-0.52	39.07	54.00	-14.93	AVG
14	5150.000	54.18	-0.48	53.70	74.00	-20.30	peak
15	5150.000	42.81	-0.48	42.33	54.00	-11.67	AVG
16	5184.200	99.47	-0.40	99.07	--	--	peak
17	5350.000	50.45	-0.08	50.37	74.00	-23.63	peak
18	5394.300	52.29	0.01	52.30	74.00	-21.70	peak
19	5394.300	38.47	0.01	38.48	54.00	-15.52	AVG
20	5435.000	51.25	0.09	51.34	74.00	-22.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

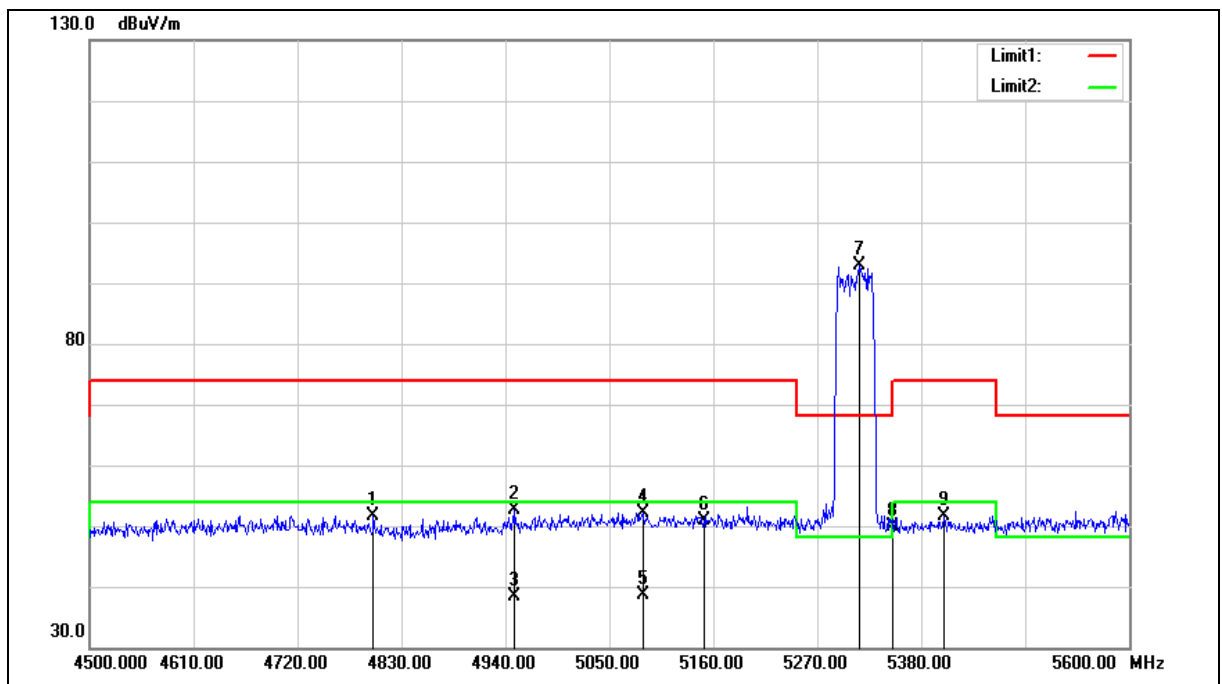

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.300	52.99	-1.32	51.67	74.00	-22.33	peak
2	4949.900	53.45	-0.90	52.55	74.00	-21.45	peak
3	4949.900	39.24	-0.90	38.34	54.00	-15.66	AVG
4	5085.200	52.77	-0.60	52.17	74.00	-21.83	peak
5	5085.200	39.25	-0.60	38.65	54.00	-15.35	AVG
6	5150.000	51.37	-0.48	50.89	74.00	-23.11	peak
7	5315.100	93.02	-0.15	92.87	--	--	peak
8	5350.000	49.92	-0.08	49.84	74.00	-24.16	peak
9	5404.200	51.53	0.02	51.55	74.00	-22.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

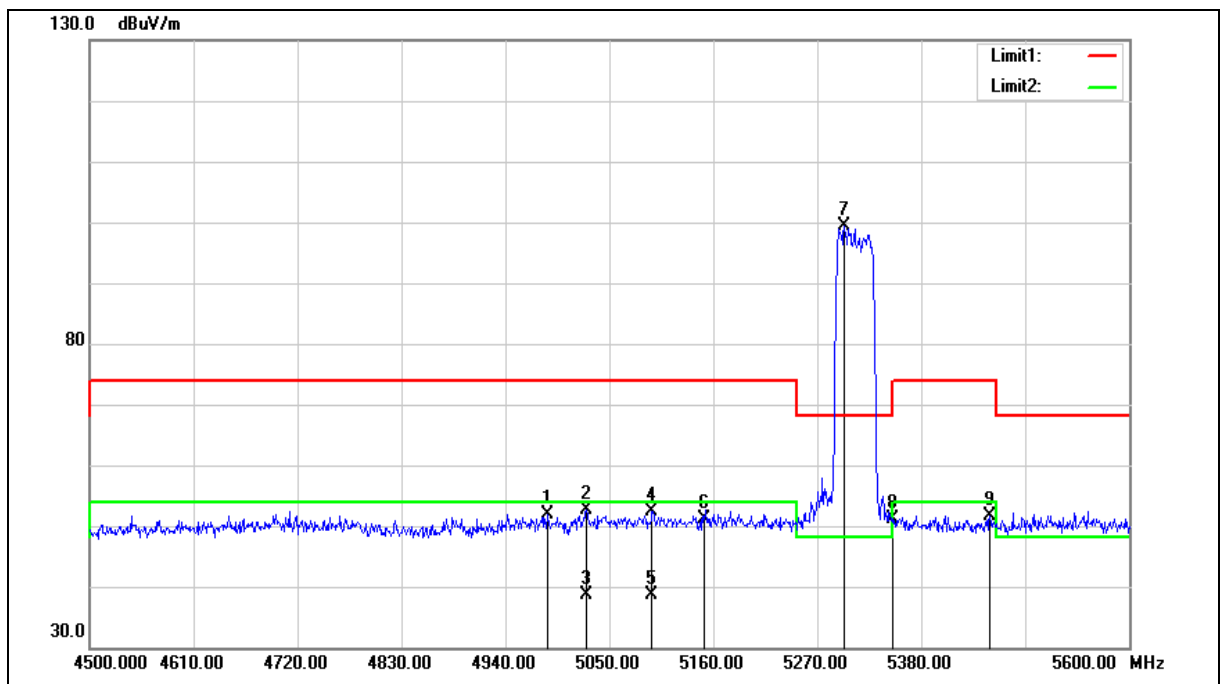

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4984.000	52.76	-0.82	51.94	74.00	-22.06	peak
2	5025.800	53.40	-0.72	52.68	74.00	-21.32	peak
3	5025.800	39.43	-0.72	38.71	54.00	-15.29	AVG
4	5095.100	53.01	-0.57	52.44	74.00	-21.56	peak
5	5095.100	39.18	-0.57	38.61	54.00	-15.39	AVG
6	5150.000	51.51	-0.48	51.03	74.00	-22.97	peak
7	5298.600	99.44	-0.18	99.26	--	--	peak
8	5350.000	51.09	-0.08	51.01	74.00	-22.99	peak
9	5452.600	51.60	0.12	51.72	74.00	-22.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

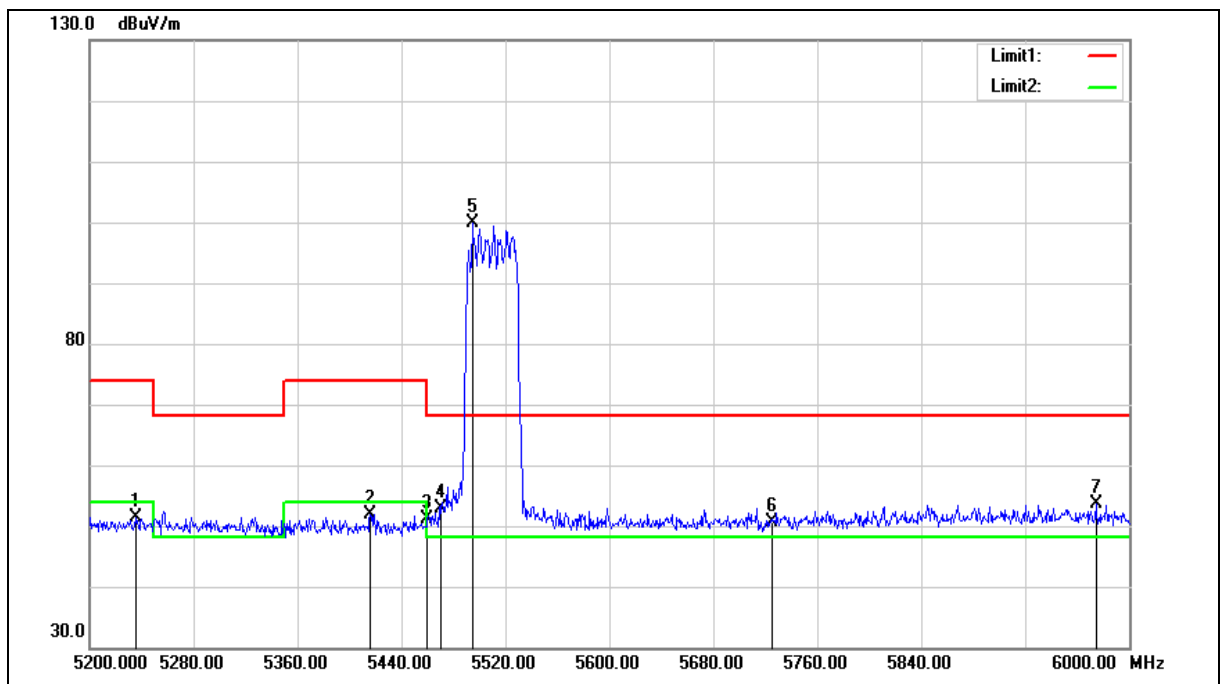

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5235.200	51.59	-0.31	51.28	74.00	-22.72	peak
2	5416.000	51.91	0.05	51.96	74.00	-22.04	peak
3	5460.000	50.94	0.14	51.08	74.00	-22.92	peak
4	5470.000	52.68	0.16	52.84	68.20	-15.36	peak
5	5494.400	99.59	0.21	99.80	--	--	peak
6	5725.000	49.93	0.82	50.75	68.20	-17.45	peak
7	5974.400	52.18	1.50	53.68	68.20	-14.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

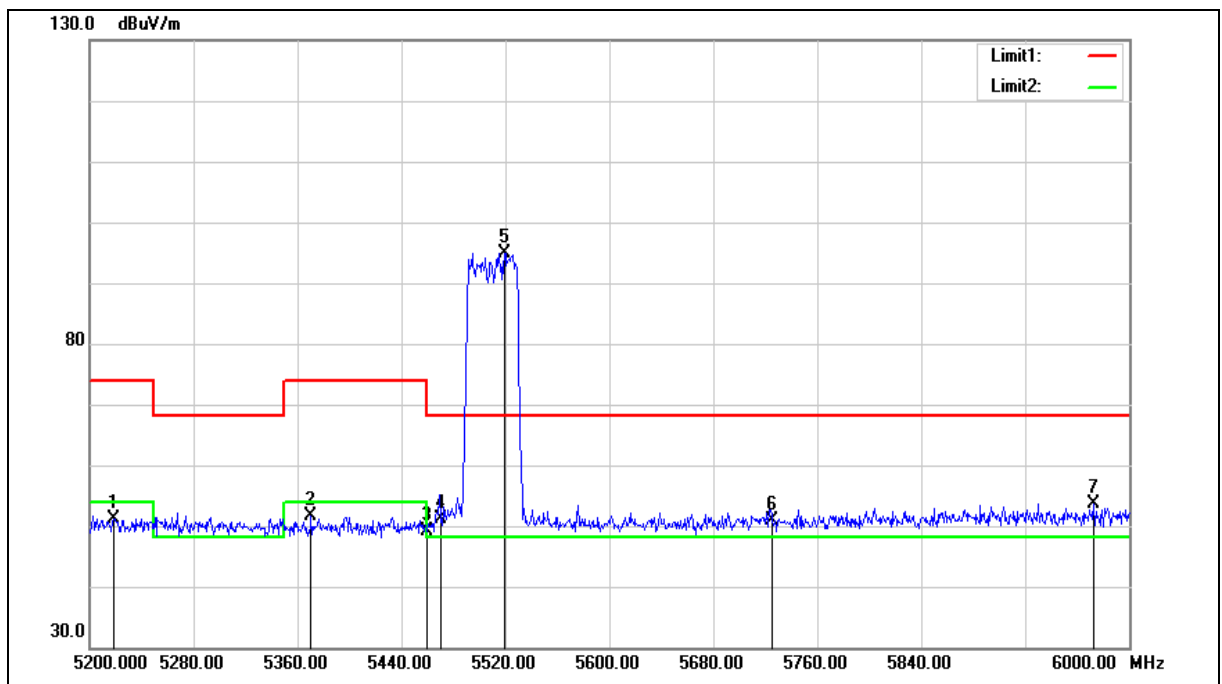

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5218.400	51.46	-0.35	51.11	74.00	-22.89	peak
2	5370.400	51.66	-0.03	51.63	74.00	-22.37	peak
3	5460.000	49.01	0.14	49.15	74.00	-24.85	peak
4	5470.000	51.04	0.16	51.20	68.20	-17.00	peak
5	5519.200	94.72	0.27	94.99	--	--	peak
6	5725.000	50.10	0.82	50.92	68.20	-17.28	peak
7	5972.800	52.18	1.50	53.68	68.20	-14.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

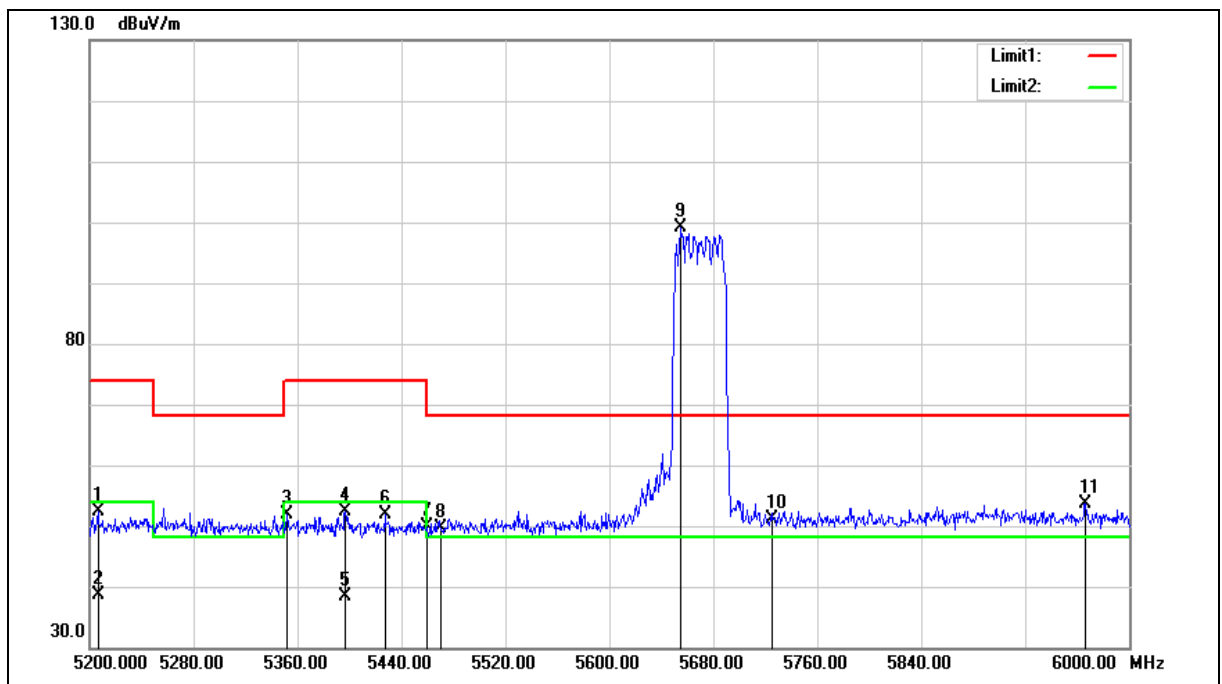

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5206.400	52.62	-0.36	52.26	74.00	-21.74	peak
2	5206.400	39.01	-0.36	38.65	54.00	-15.35	AVG
3	5352.000	52.00	-0.08	51.92	74.00	-22.08	peak
4	5396.800	52.31	0.01	52.32	74.00	-21.68	peak
5	5396.800	38.35	0.01	38.36	54.00	-15.64	AVG
6	5427.200	51.80	0.07	51.87	74.00	-22.13	peak
7	5460.000	49.68	0.14	49.82	74.00	-24.18	peak
8	5470.000	49.37	0.16	49.53	68.20	-18.67	peak
9	5655.200	98.55	0.64	99.19	--	--	peak
10	5725.000	50.26	0.82	51.08	68.20	-17.12	peak
11	5966.400	52.26	1.49	53.75	68.20	-14.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

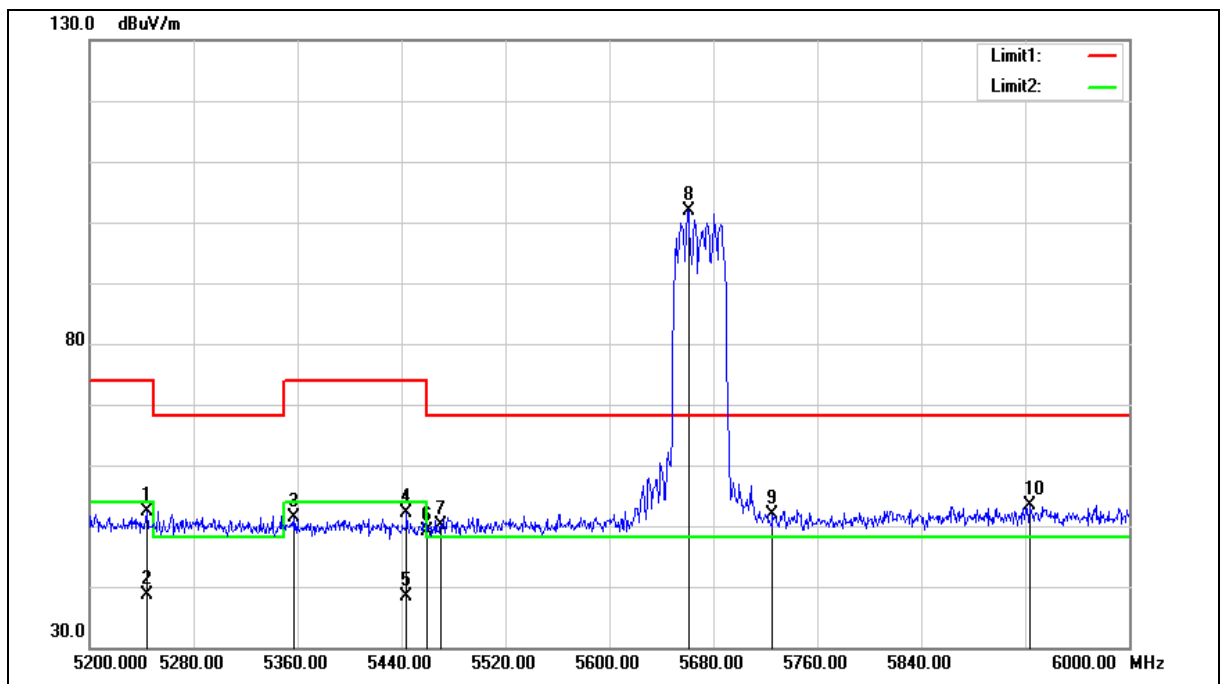

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5244.000	52.66	-0.28	52.38	74.00	-21.62	peak
2	5244.000	38.84	-0.28	38.56	54.00	-15.44	AVG
3	5357.600	51.34	-0.06	51.28	74.00	-22.72	peak
4	5444.000	51.90	0.11	52.01	74.00	-21.99	peak
5	5444.000	38.32	0.11	38.43	54.00	-15.57	AVG
6	5460.000	49.07	0.14	49.21	74.00	-24.79	peak
7	5470.000	50.04	0.16	50.20	68.20	-18.00	peak
8	5660.800	101.32	0.66	101.98	--	--	peak
9	5725.000	50.97	0.82	51.79	68.20	-16.41	peak
10	5923.200	52.12	1.37	53.49	68.20	-14.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

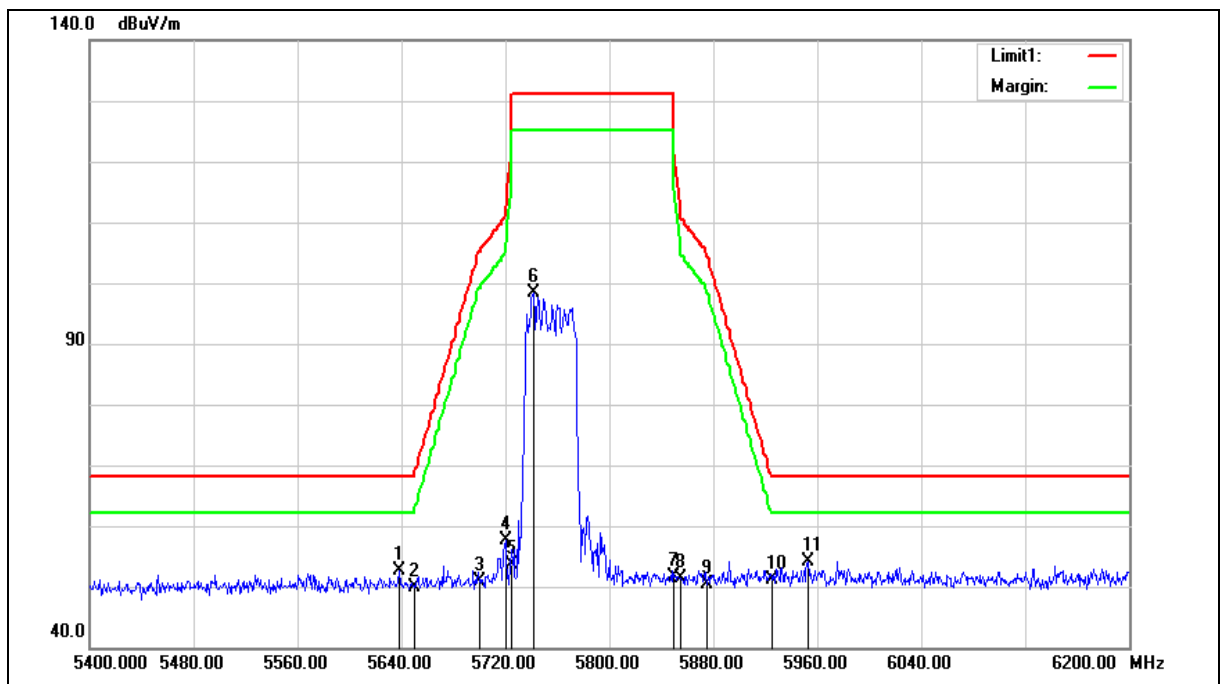

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5638.400	51.94	0.59	52.53	68.20	-15.67	peak
2	5650.000	49.30	0.62	49.92	68.20	-18.28	peak
3	5700.000	50.20	0.75	50.95	105.20	-54.25	peak
4	5720.000	56.91	0.81	57.72	110.80	-53.08	peak
5	5725.000	52.91	0.82	53.73	122.20	-68.47	peak
6	5741.600	97.55	0.87	98.42	--	--	peak
7	5850.000	50.56	1.17	51.73	122.20	-70.47	peak
8	5855.000	50.12	1.18	51.30	110.80	-59.50	peak
9	5875.000	49.24	1.23	50.47	105.20	-54.73	peak
10	5925.000	49.88	1.37	51.25	68.20	-16.95	peak
11	5952.800	52.77	1.44	54.21	68.20	-13.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

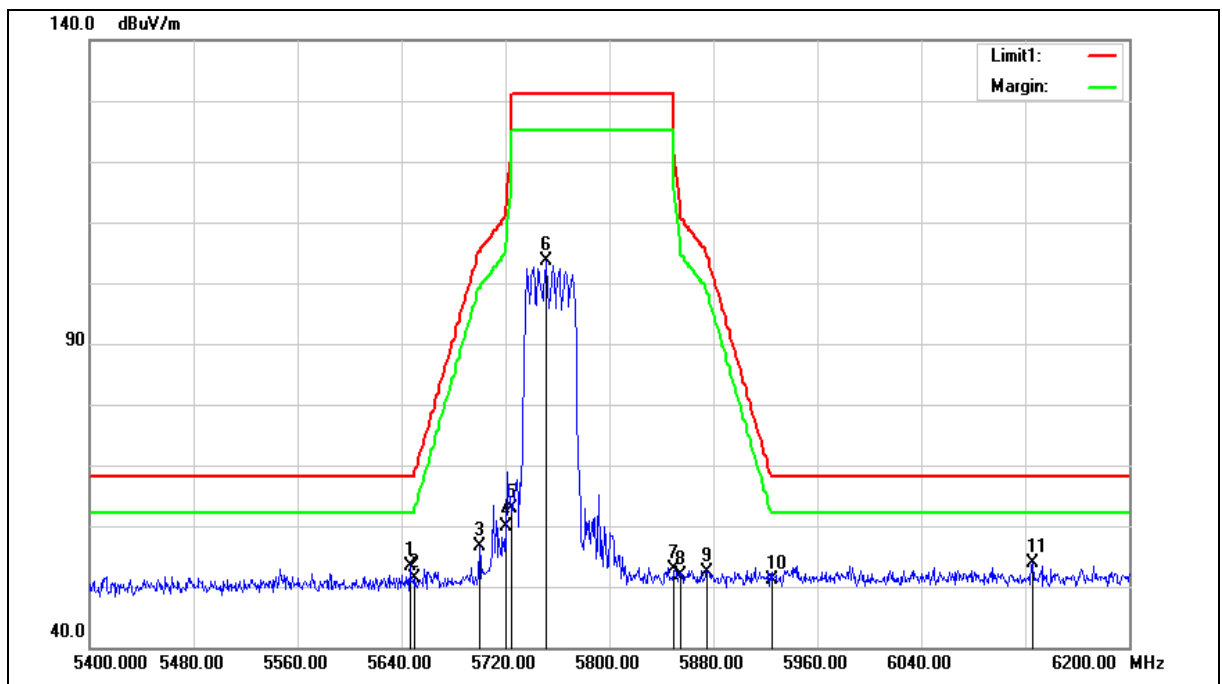

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.400	52.77	0.61	53.38	68.20	-14.82	peak
2	5650.000	50.76	0.62	51.38	68.20	-16.82	peak
3	5700.000	55.77	0.75	56.52	105.20	-48.68	peak
4	5720.000	59.18	0.81	59.99	110.80	-50.81	peak
5	5725.000	61.95	0.82	62.77	122.20	-59.43	peak
6	5751.200	102.81	0.90	103.71	--	--	peak
7	5850.000	51.73	1.17	52.90	122.20	-69.30	peak
8	5855.000	50.69	1.18	51.87	110.80	-58.93	peak
9	5875.000	51.19	1.23	52.42	105.20	-52.78	peak
10	5925.000	49.80	1.37	51.17	68.20	-17.03	peak
11	6125.600	51.88	2.02	53.90	68.20	-14.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

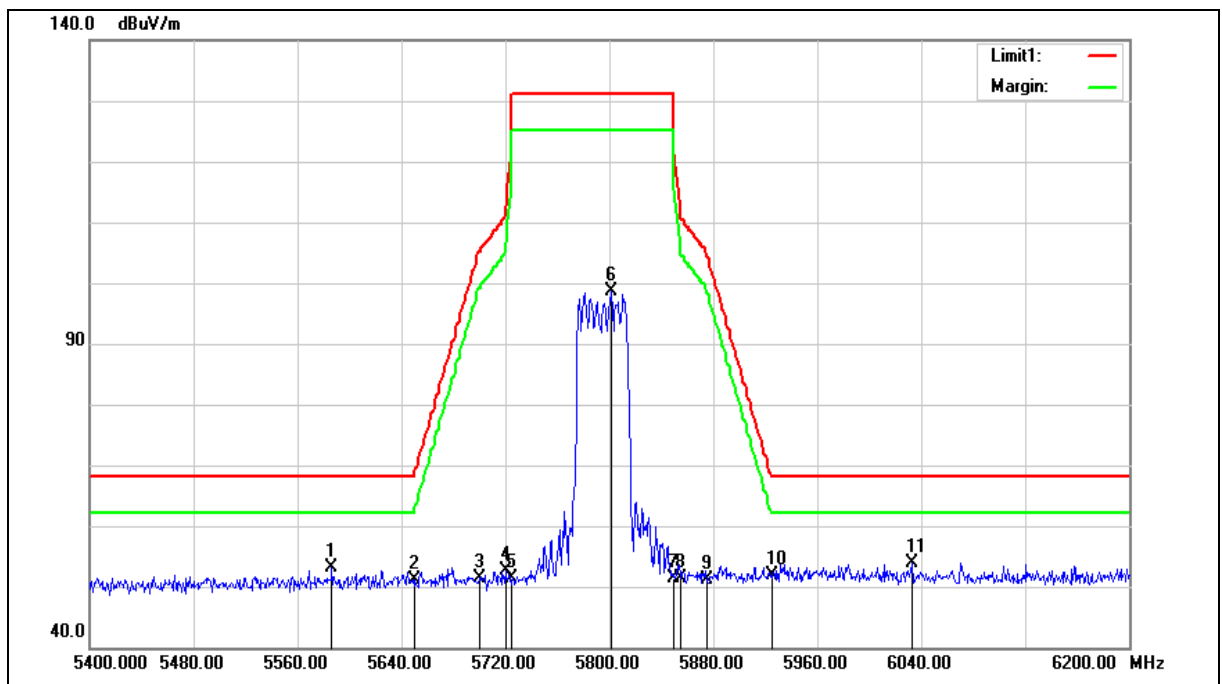

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5586.400	52.79	0.45	53.24	68.20	-14.96	peak
2	5650.000	50.59	0.62	51.21	68.20	-16.99	peak
3	5700.000	50.65	0.75	51.40	105.20	-53.80	peak
4	5720.000	51.73	0.81	52.54	110.80	-58.26	peak
5	5725.000	50.56	0.82	51.38	122.20	-70.82	peak
6	5801.600	97.66	1.03	98.69	--	--	peak
7	5850.000	50.31	1.17	51.48	122.20	-70.72	peak
8	5855.000	50.26	1.18	51.44	110.80	-59.36	peak
9	5875.000	49.85	1.23	51.08	105.20	-54.12	peak
10	5925.000	50.63	1.37	52.00	68.20	-16.20	peak
11	6032.800	52.11	1.69	53.80	68.20	-14.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

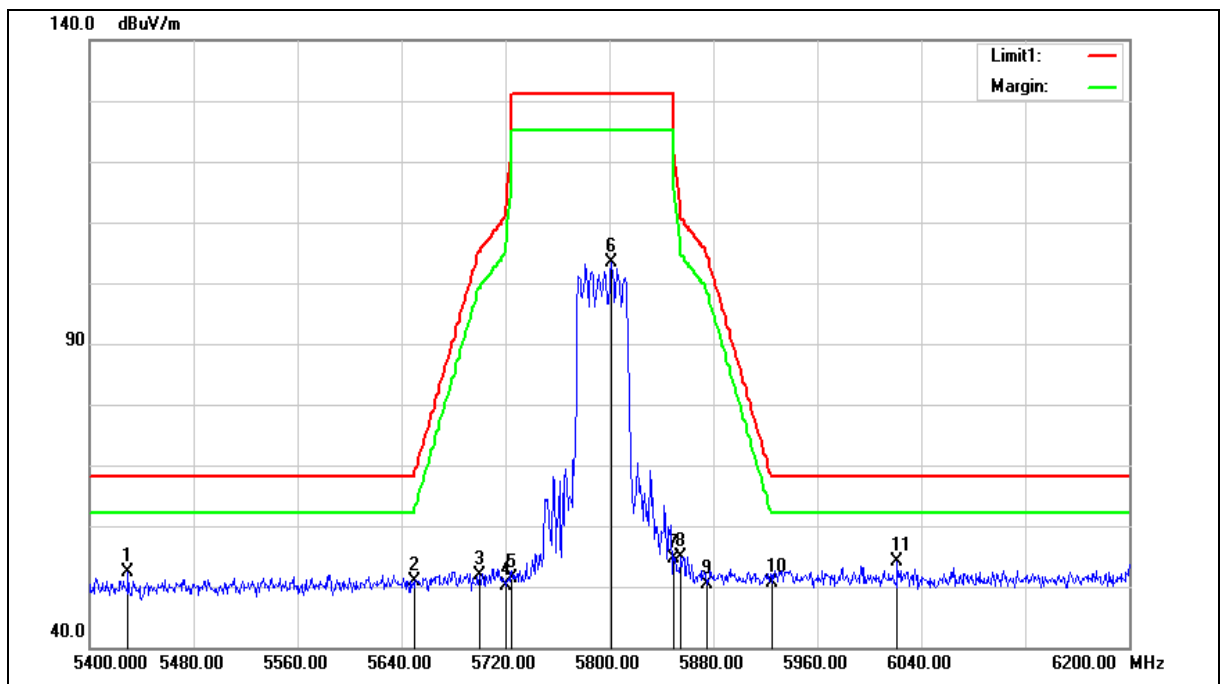

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.600	52.23	0.08	52.31	68.20	-15.89	peak
2	5650.000	50.22	0.62	50.84	68.20	-17.36	peak
3	5700.000	51.18	0.75	51.93	105.20	-53.27	peak
4	5720.000	49.40	0.81	50.21	110.80	-60.59	peak
5	5725.000	50.52	0.82	51.34	122.20	-70.86	peak
6	5801.600	102.45	1.03	103.48	--	--	peak
7	5850.000	53.49	1.17	54.66	122.20	-67.54	peak
8	5855.000	53.63	1.18	54.81	110.80	-55.99	peak
9	5875.000	49.19	1.23	50.42	105.20	-54.78	peak
10	5925.000	49.16	1.37	50.53	68.20	-17.67	peak
11	6021.600	52.48	1.64	54.12	68.20	-14.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

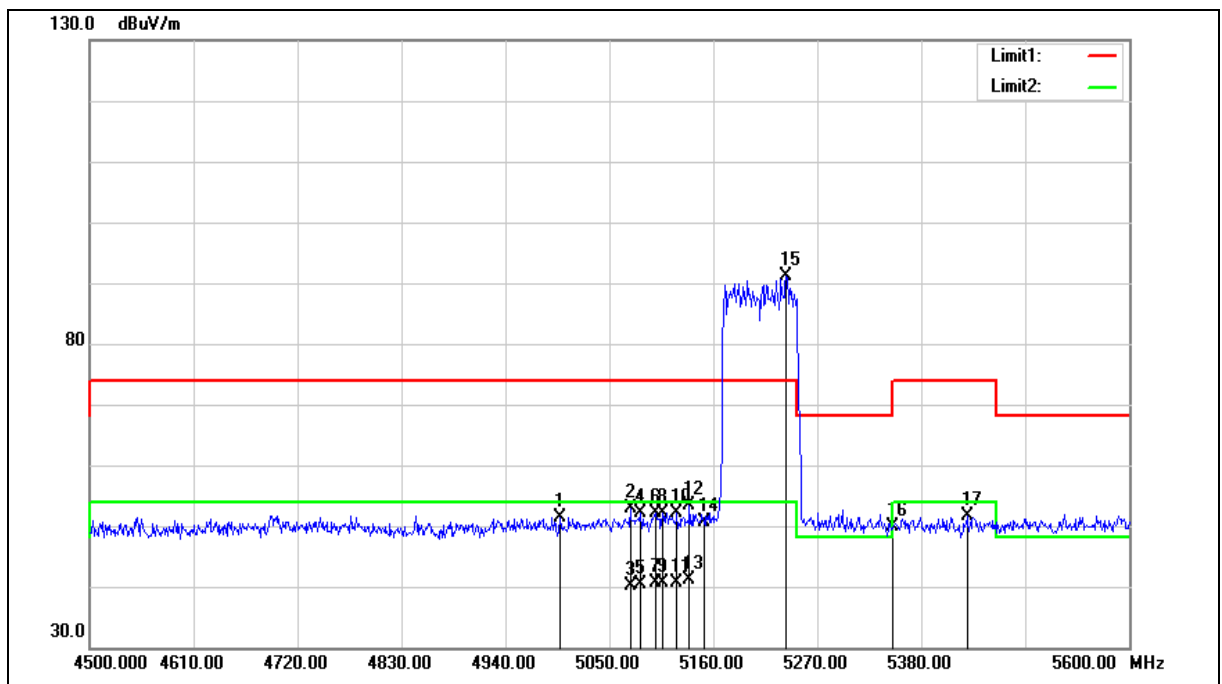

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4997.200	52.22	-0.78	51.44	74.00	-22.56	peak
2	5072.000	53.55	-0.63	52.92	74.00	-21.08	peak
3	5072.000	40.67	-0.63	40.04	54.00	-13.96	AVG
4	5083.000	52.85	-0.60	52.25	74.00	-21.75	peak
5	5083.000	40.87	-0.60	40.27	54.00	-13.73	AVG
6	5099.500	52.78	-0.57	52.21	74.00	-21.79	peak
7	5099.500	41.12	-0.57	40.55	54.00	-13.45	AVG
8	5106.100	52.77	-0.57	52.20	74.00	-21.80	peak
9	5106.100	41.20	-0.57	40.63	54.00	-13.37	AVG
10	5121.500	52.55	-0.53	52.02	74.00	-21.98	peak
11	5121.500	41.24	-0.53	40.71	54.00	-13.29	AVG
12	5134.700	53.84	-0.51	53.33	74.00	-20.67	peak
13	5134.700	41.65	-0.51	41.14	54.00	-12.86	AVG
14	5150.000	51.02	-0.48	50.54	74.00	-23.46	peak
15	5237.000	91.47	-0.31	91.16	--	--	peak
16	5350.000	49.94	-0.08	49.86	74.00	-24.14	peak
17	5428.400	51.46	0.08	51.54	74.00	-22.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

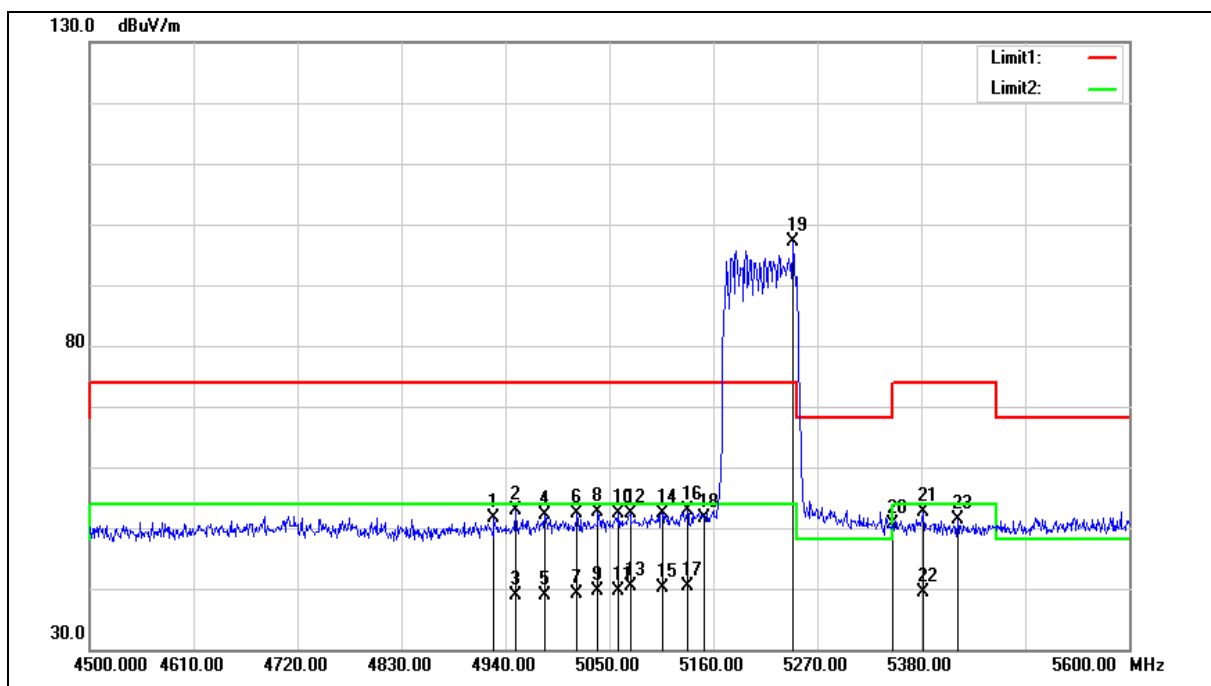

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4927.900	52.64	-0.96	51.68	74.00	-22.32	peak
2	4951.000	53.81	-0.90	52.91	74.00	-21.09	peak
3	4951.000	39.70	-0.90	38.80	54.00	-15.20	AVG
4	4981.800	52.99	-0.82	52.17	74.00	-21.83	peak
5	4981.800	39.80	-0.82	38.98	54.00	-15.02	AVG
6	5015.900	53.09	-0.74	52.35	74.00	-21.65	peak
7	5015.900	39.86	-0.74	39.12	54.00	-14.88	AVG
8	5037.900	53.20	-0.69	52.51	74.00	-21.49	peak
9	5037.900	40.29	-0.69	39.60	54.00	-14.40	AVG
10	5059.900	53.03	-0.65	52.38	74.00	-21.62	peak
11	5059.900	40.20	-0.65	39.55	54.00	-14.45	AVG
12	5072.000	53.11	-0.63	52.48	74.00	-21.52	peak
13	5072.000	40.90	-0.63	40.27	54.00	-13.73	AVG
14	5106.100	53.03	-0.57	52.46	74.00	-21.54	peak
15	5106.100	40.69	-0.57	40.12	54.00	-13.88	AVG
16	5132.500	53.29	-0.51	52.78	74.00	-21.22	peak
17	5132.500	40.89	-0.51	40.38	54.00	-13.62	AVG
18	5150.000	52.00	-0.48	51.52	74.00	-22.48	peak
19	5244.700	97.44	-0.28	97.16	--	--	peak
20	5350.000	50.69	-0.08	50.61	74.00	-23.39	peak
21	5382.200	52.68	-0.02	52.66	74.00	-21.34	peak
22	5382.200	39.50	-0.02	39.48	54.00	-14.52	AVG
23	5418.500	51.36	0.05	51.41	74.00	-22.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

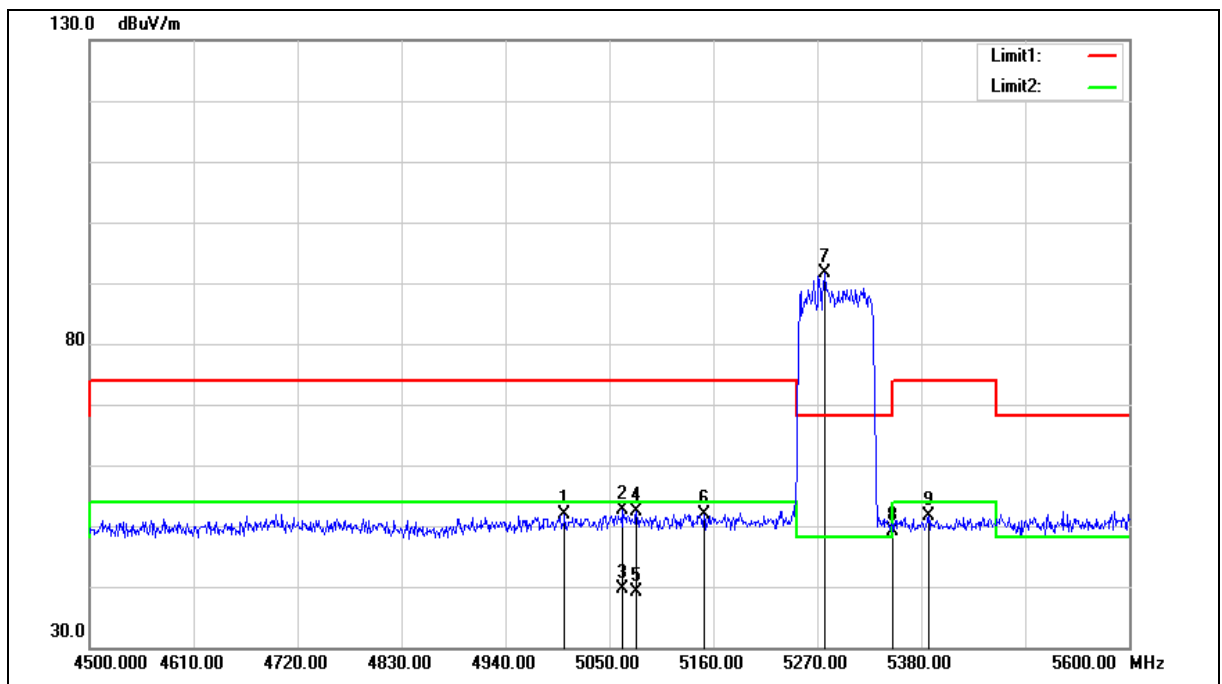

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5002.700	52.53	-0.77	51.76	74.00	-22.24	peak
2	5064.300	53.40	-0.65	52.75	74.00	-21.25	peak
3	5064.300	40.33	-0.65	39.68	54.00	-14.32	AVG
4	5078.600	52.93	-0.62	52.31	74.00	-21.69	peak
5	5078.600	39.85	-0.62	39.23	54.00	-14.77	AVG
6	5150.000	52.40	-0.48	51.92	74.00	-22.08	peak
7	5277.700	91.79	-0.23	91.56	--	--	peak
8	5350.000	49.26	-0.08	49.18	74.00	-24.82	peak
9	5387.700	51.51	0.00	51.51	74.00	-22.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

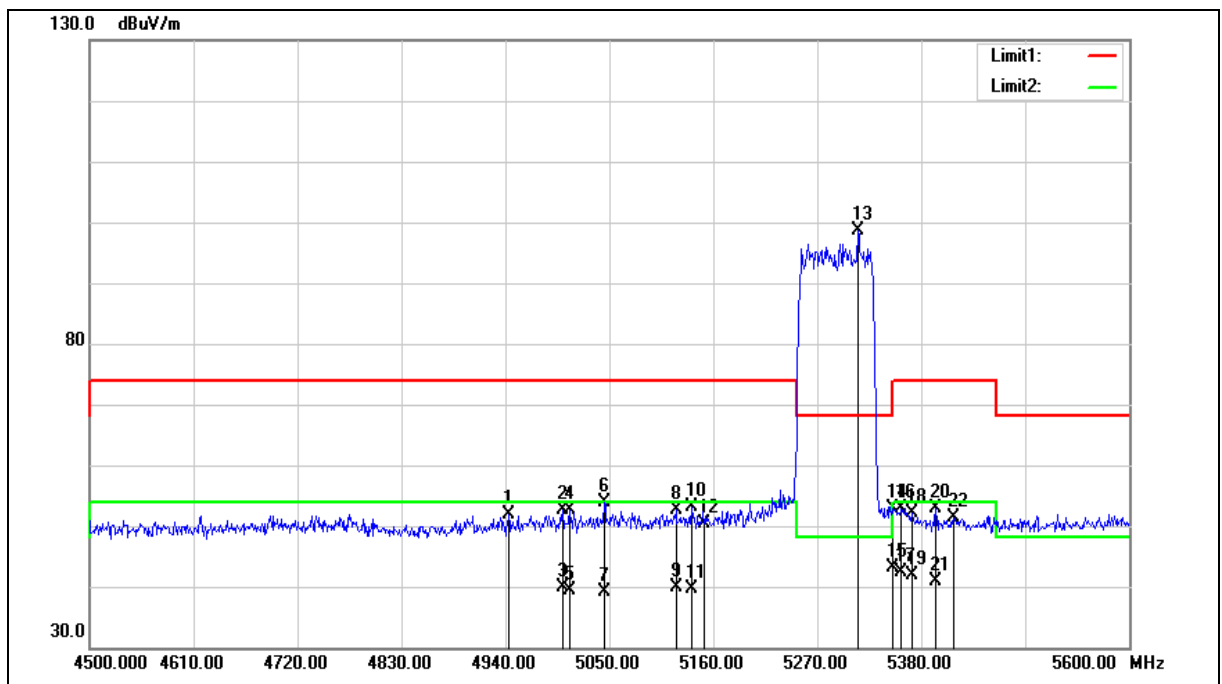

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4943.300	52.79	-0.93	51.86	74.00	-22.14	peak
2	5000.500	53.41	-0.77	52.64	74.00	-21.36	peak
3	5000.500	40.59	-0.77	39.82	54.00	-14.18	AVG
4	5008.200	53.26	-0.75	52.51	74.00	-21.49	peak
5	5008.200	40.20	-0.75	39.45	54.00	-14.55	AVG
6	5044.500	54.48	-0.68	53.80	74.00	-20.20	peak
7	5044.500	39.72	-0.68	39.04	54.00	-14.96	AVG
8	5120.400	53.19	-0.53	52.66	74.00	-21.34	peak
9	5120.400	40.41	-0.53	39.88	54.00	-14.12	AVG
10	5136.900	53.53	-0.50	53.03	74.00	-20.97	peak
11	5136.900	40.14	-0.50	39.64	54.00	-14.36	AVG
12	5150.000	50.74	-0.48	50.26	74.00	-23.74	peak
13	5312.900	98.90	-0.15	98.75	--	--	peak
14	5350.000	52.85	-0.08	52.77	74.00	-21.23	peak
15	5350.000	43.28	-0.08	43.20	54.00	-10.80	AVG
16	5359.100	53.02	-0.06	52.96	74.00	-21.04	peak
17	5359.100	42.36	-0.06	42.30	54.00	-11.70	AVG
18	5370.100	52.13	-0.03	52.10	74.00	-21.90	peak
19	5370.100	41.98	-0.03	41.95	54.00	-12.05	AVG
20	5395.400	52.84	0.01	52.85	74.00	-21.15	peak
21	5395.400	40.85	0.01	40.86	54.00	-13.14	AVG
22	5414.100	51.42	0.05	51.47	74.00	-22.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

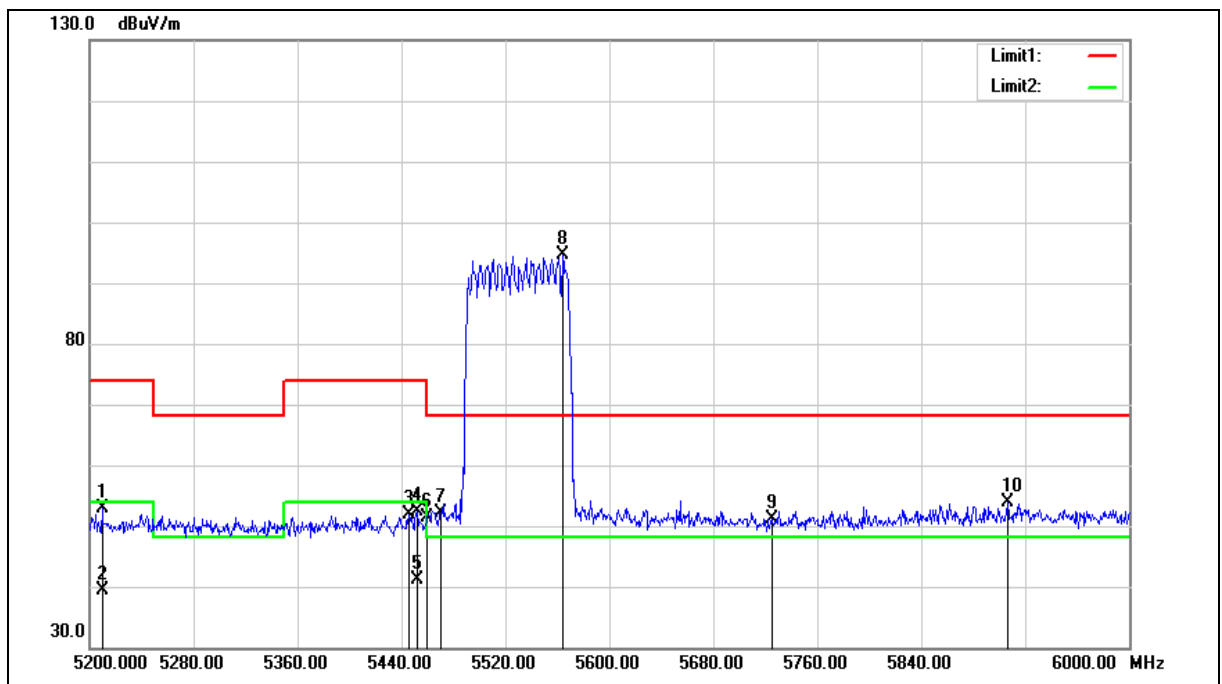

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5209.600	53.19	-0.36	52.83	74.00	-21.17	peak
2	5209.600	39.83	-0.36	39.47	54.00	-14.53	AVG
3	5445.600	51.70	0.11	51.81	74.00	-22.19	peak
4	5452.000	52.33	0.12	52.45	74.00	-21.55	peak
5	5452.000	41.07	0.12	41.19	54.00	-12.81	AVG
6	5460.000	51.28	0.14	51.42	74.00	-22.58	peak
7	5470.000	52.03	0.16	52.19	68.20	-16.01	peak
8	5564.000	94.19	0.39	94.58	--	--	peak
9	5725.000	50.42	0.82	51.24	68.20	-16.96	peak
10	5906.400	52.66	1.32	53.98	68.20	-14.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

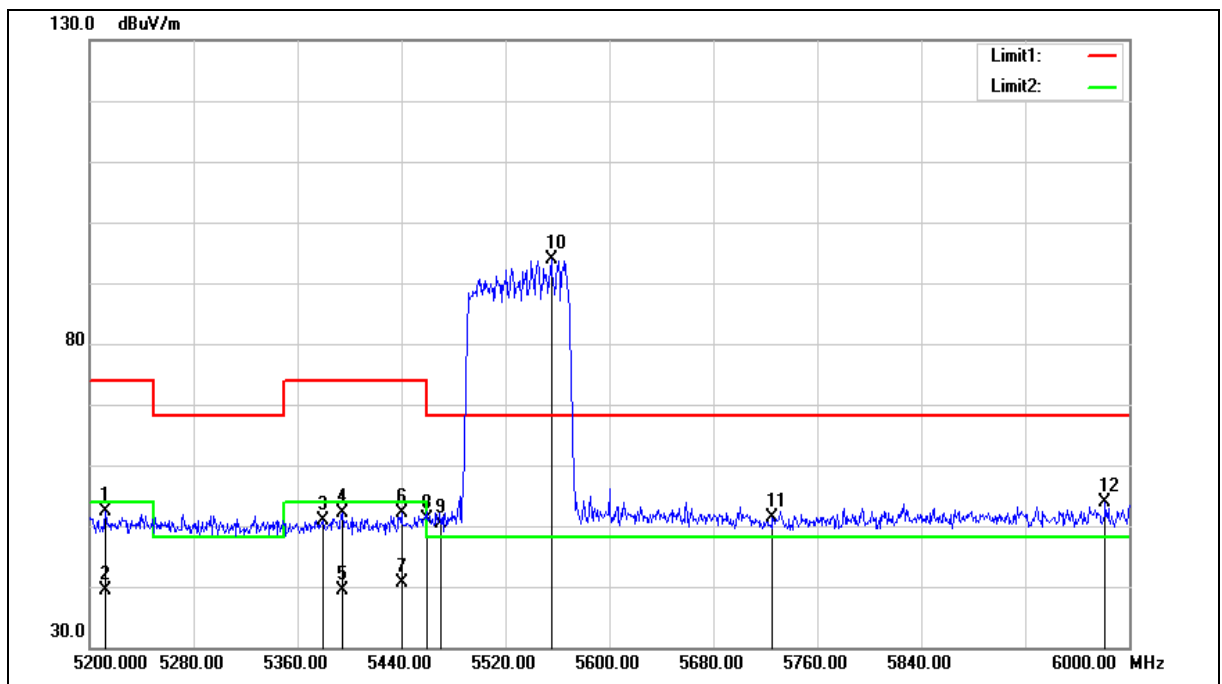

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.000	52.61	-0.35	52.26	74.00	-21.74	peak
2	5212.000	39.73	-0.35	39.38	54.00	-14.62	AVG
3	5380.000	50.95	-0.03	50.92	74.00	-23.08	peak
4	5394.400	52.11	0.01	52.12	74.00	-21.88	peak
5	5394.400	39.47	0.01	39.48	54.00	-14.52	AVG
6	5440.000	52.08	0.09	52.17	74.00	-21.83	peak
7	5440.000	40.43	0.09	40.52	54.00	-13.48	AVG
8	5460.000	50.97	0.14	51.11	74.00	-22.89	peak
9	5470.000	50.23	0.16	50.39	68.20	-17.81	peak
10	5555.200	93.42	0.36	93.78	--	--	peak
11	5725.000	50.47	0.82	51.29	68.20	-16.91	peak
12	5981.600	52.30	1.52	53.82	68.20	-14.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

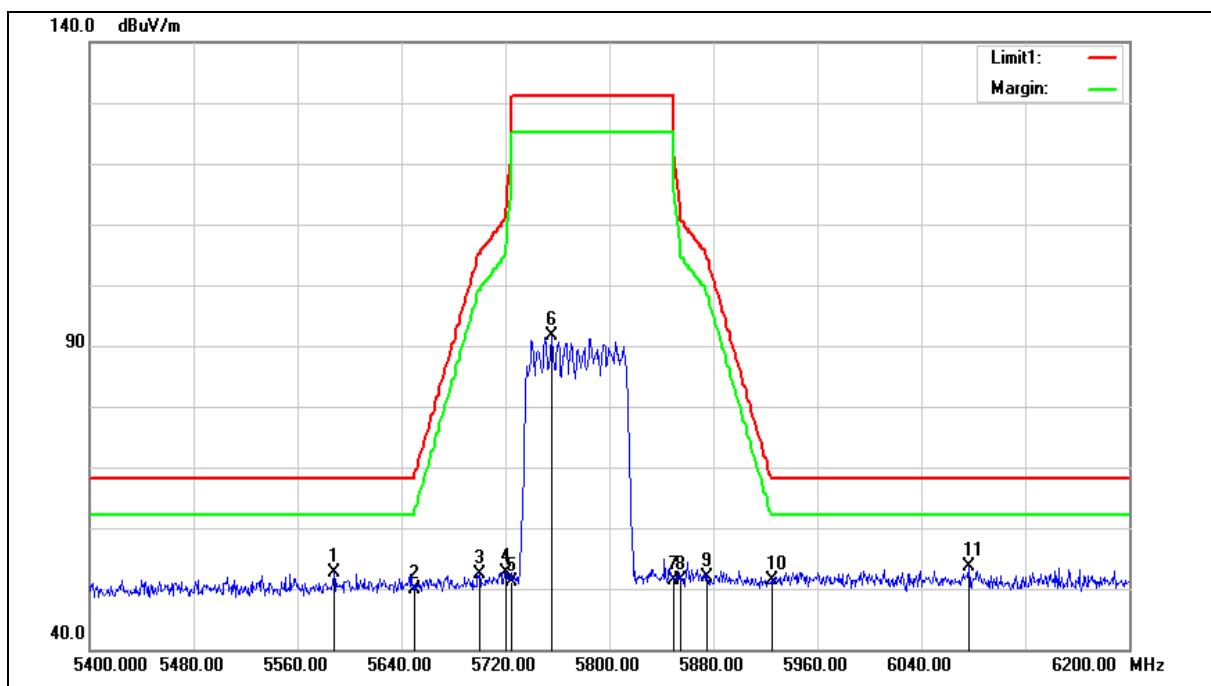

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5588.000	52.11	0.46	52.57	68.20	-15.63	peak
2	5650.000	49.19	0.62	49.81	68.20	-18.39	peak
3	5700.000	51.55	0.75	52.30	105.20	-52.90	peak
4	5720.000	51.88	0.81	52.69	110.80	-58.11	peak
5	5725.000	50.19	0.82	51.01	122.20	-71.19	peak
6	5755.200	90.70	0.91	91.61	--	--	peak
7	5850.000	50.28	1.17	51.45	122.20	-70.75	peak
8	5855.000	50.17	1.18	51.35	110.80	-59.45	peak
9	5875.000	50.77	1.23	52.00	105.20	-53.20	peak
10	5925.000	50.04	1.37	51.41	68.20	-16.79	peak
11	6076.800	51.75	1.84	53.59	68.20	-14.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

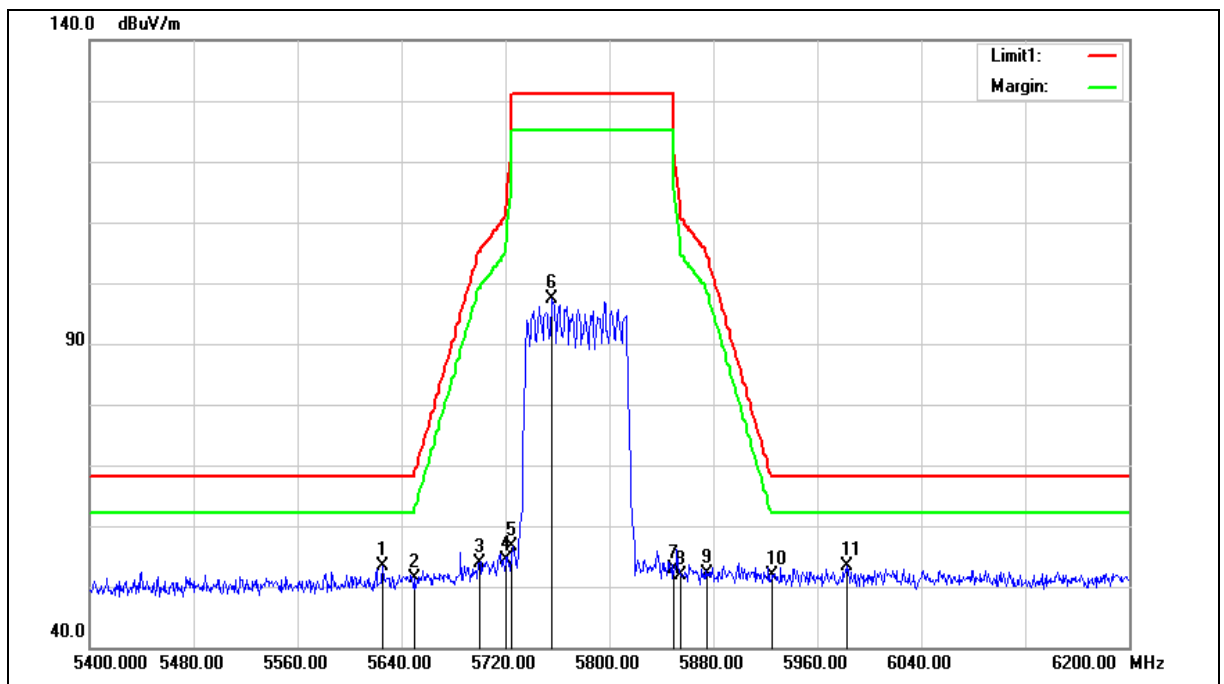

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5625.600	52.86	0.55	53.41	68.20	-14.79	peak
2	5650.000	50.80	0.62	51.42	68.20	-16.78	peak
3	5700.000	53.20	0.75	53.95	105.20	-51.25	peak
4	5720.000	53.63	0.81	54.44	110.80	-56.36	peak
5	5725.000	55.72	0.82	56.54	122.20	-65.66	peak
6	5756.000	96.59	0.91	97.50	--	--	peak
7	5850.000	51.74	1.17	52.91	122.20	-69.29	peak
8	5855.000	50.68	1.18	51.86	110.80	-58.94	peak
9	5875.000	50.84	1.23	52.07	105.20	-53.13	peak
10	5925.000	50.46	1.37	51.83	68.20	-16.37	peak
11	5983.200	51.84	1.52	53.36	68.20	-14.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

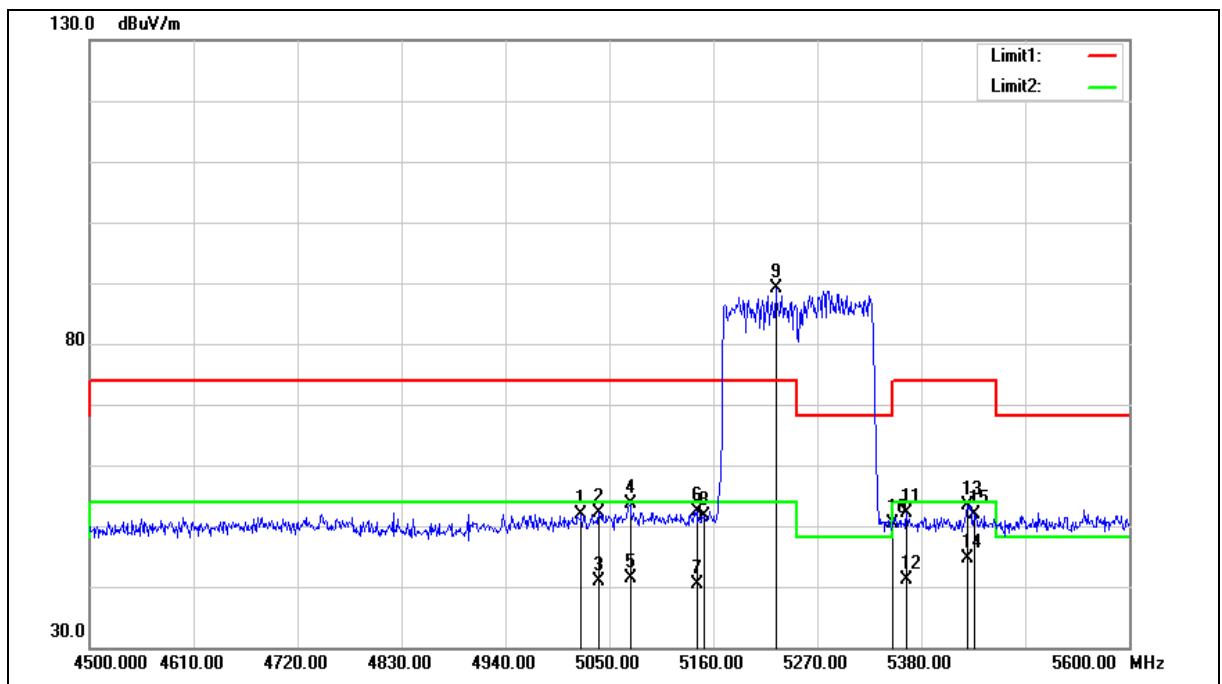

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5020.300	52.57	-0.73	51.84	74.00	-22.16	peak
2	5039.000	52.94	-0.69	52.25	74.00	-21.75	peak
3	5039.000	41.64	-0.69	40.95	54.00	-13.05	AVG
4	5072.000	54.16	-0.63	53.53	74.00	-20.47	peak
5	5072.000	42.03	-0.63	41.40	54.00	-12.60	AVG
6	5142.400	52.81	-0.49	52.32	74.00	-21.68	peak
7	5142.400	40.96	-0.49	40.47	54.00	-13.53	AVG
8	5150.000	52.21	-0.48	51.73	74.00	-22.27	peak
9	5226.000	89.37	-0.32	89.05	--	--	peak
10	5350.000	50.34	-0.08	50.26	74.00	-23.74	peak
11	5364.600	52.18	-0.05	52.13	74.00	-21.87	peak
12	5364.600	41.10	-0.05	41.05	54.00	-12.95	AVG
13	5429.500	53.38	0.08	53.46	74.00	-20.54	peak
14	5429.500	44.66	0.08	44.74	54.00	-9.26	AVG
15	5436.100	51.88	0.09	51.97	74.00	-22.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

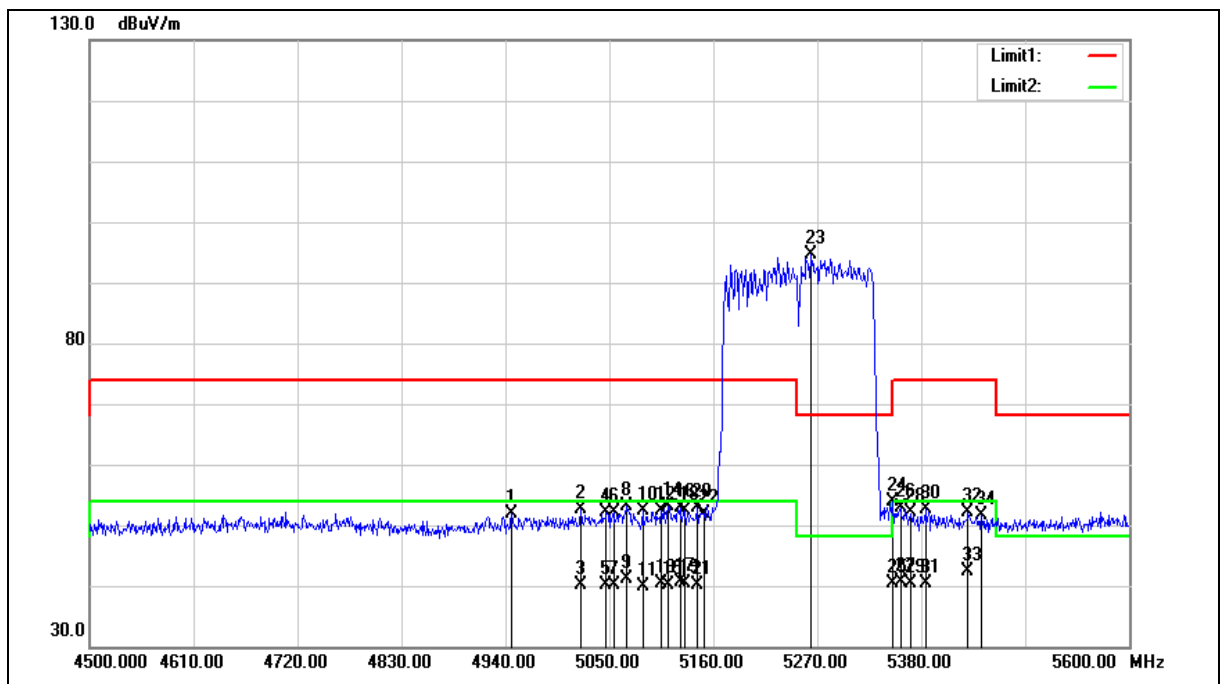

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4946.600	52.92	-0.93	51.99	74.00	-22.01	peak
2	5019.200	53.33	-0.73	52.60	74.00	-21.40	peak
3	5019.200	40.80	-0.73	40.07	54.00	-13.93	AVG
4	5046.700	52.79	-0.68	52.11	74.00	-21.89	peak
5	5046.700	40.87	-0.68	40.19	54.00	-13.81	AVG
6	5054.400	52.88	-0.66	52.22	74.00	-21.78	peak
7	5054.400	40.78	-0.66	40.12	54.00	-13.88	AVG
8	5067.600	53.75	-0.64	53.11	74.00	-20.89	peak
9	5067.600	41.71	-0.64	41.07	54.00	-12.93	AVG
10	5085.200	52.88	-0.60	52.28	74.00	-21.72	peak
11	5085.200	40.49	-0.60	39.89	54.00	-14.11	AVG
12	5105.000	52.90	-0.57	52.33	74.00	-21.67	peak
13	5105.000	40.88	-0.57	40.31	54.00	-13.69	AVG
14	5112.700	53.65	-0.55	53.10	74.00	-20.90	peak
15	5112.700	40.72	-0.55	40.17	54.00	-13.83	AVG
16	5124.800	53.34	-0.52	52.82	74.00	-21.18	peak
17	5124.800	41.10	-0.52	40.58	54.00	-13.42	AVG
18	5130.300	52.94	-0.52	52.42	74.00	-21.58	peak
19	5130.300	40.82	-0.52	40.30	54.00	-13.70	AVG
20	5142.400	53.33	-0.49	52.84	74.00	-21.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5142.400	40.63	-0.49	40.14	54.00	-13.86	AVG
22	5150.000	52.27	-0.48	51.79	74.00	-22.21	peak
23	5263.400	94.87	-0.25	94.62	--	--	peak
24	5350.000	53.96	-0.08	53.88	74.00	-20.12	peak
25	5350.000	40.46	-0.08	40.38	54.00	-13.62	AVG
26	5358.000	52.91	-0.06	52.85	74.00	-21.15	peak
27	5358.000	40.70	-0.06	40.64	54.00	-13.36	AVG
28	5369.000	52.05	-0.04	52.01	74.00	-21.99	peak
29	5369.000	40.47	-0.04	40.43	54.00	-13.57	AVG
30	5384.400	52.57	-0.01	52.56	74.00	-21.44	peak
31	5384.400	40.31	-0.01	40.30	54.00	-13.70	AVG
32	5429.500	52.08	0.08	52.16	74.00	-21.84	peak
33	5429.500	42.18	0.08	42.26	54.00	-11.74	AVG
34	5443.800	51.47	0.11	51.58	74.00	-22.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.