


測試頻道: IEEE 802.11a / 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/05
 環境濕度: 66%

Orthogonal Axis: X Polarization: Vertical

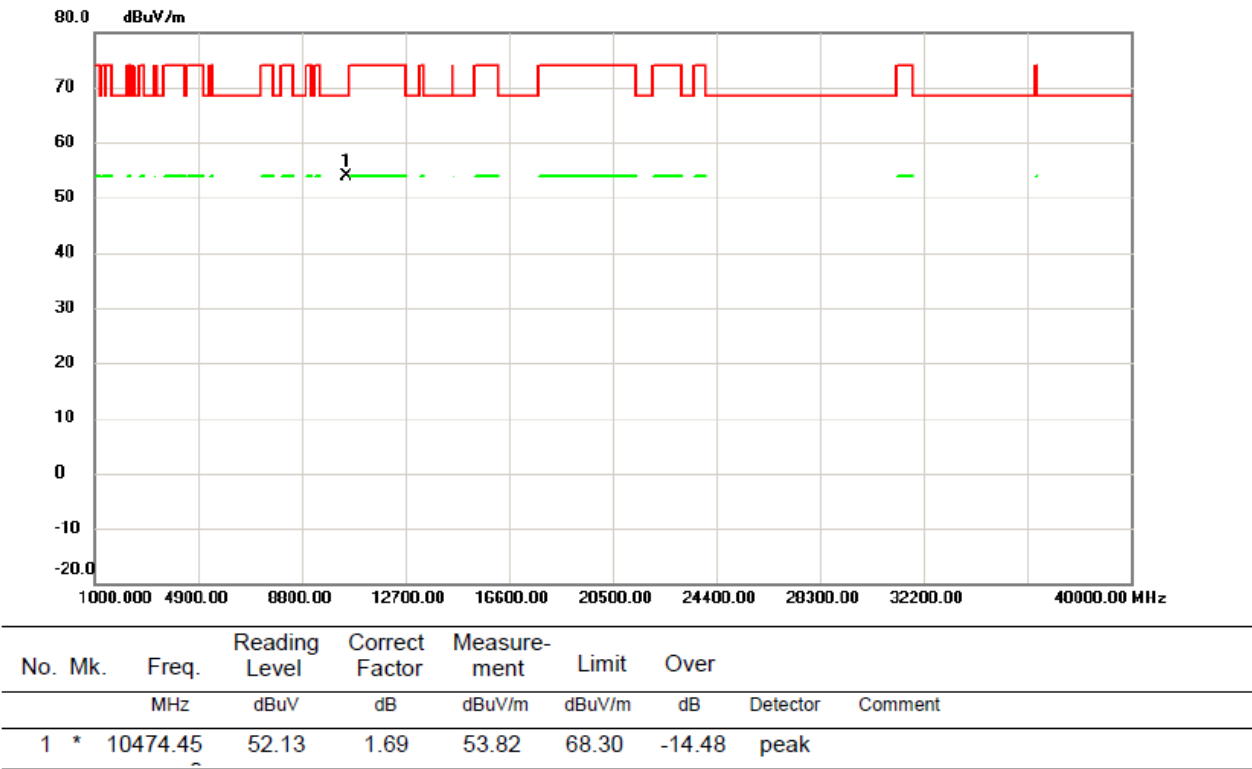


測試頻道: IEEE 802.11a / 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

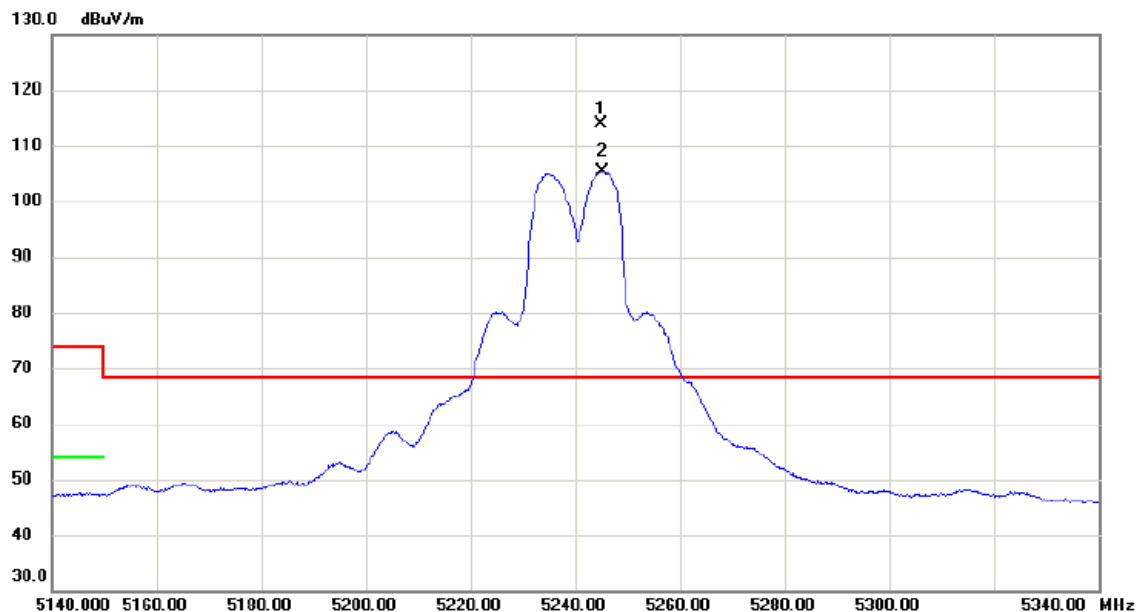


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5244.900	115.01	-1.09	113.92	68.30	45.62	peak	主波訊號不予判定
2	X	5245.100	106.48	-1.09	105.39	68.30	37.09	AVG	主波訊號不予判定

測試頻道: IEEE 802.11a / 5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

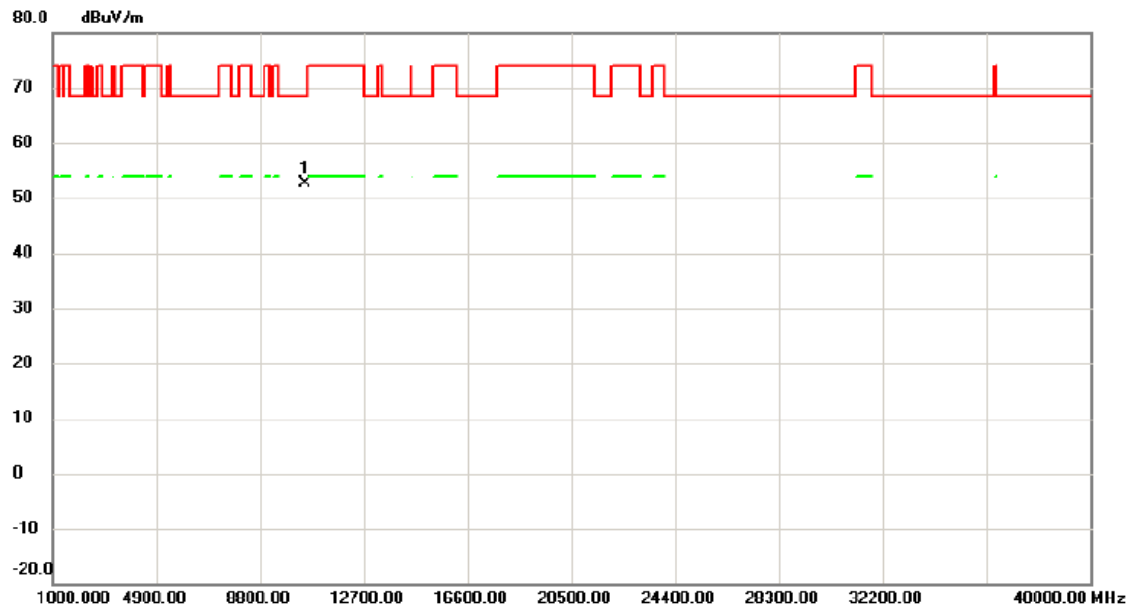


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10474.80	50.85	1.69	52.54	68.30	-15.76	peak	

測試頻道: IEEE 802.11n (HT20) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

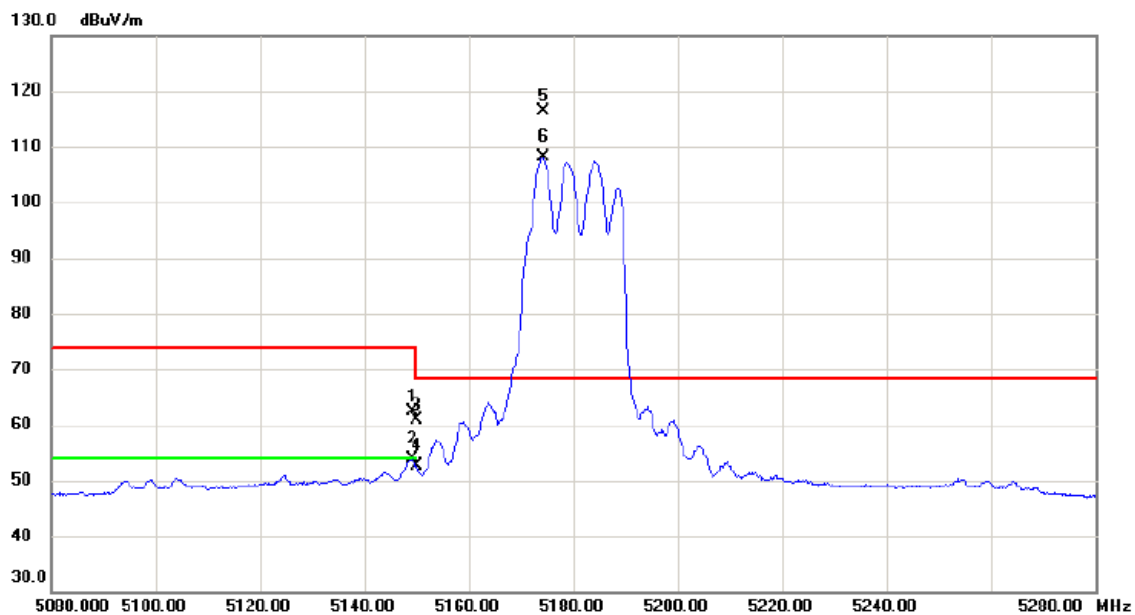


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5149.300	63.65	-1.17	62.48	74.00	-11.52	peak	
2		5149.300	55.00	-1.17	53.83	54.00	-0.17	AVG	
3		5150.000	62.03	-1.17	60.86	74.00	-13.14	peak	
4		5150.000	53.68	-1.17	52.51	54.00	-1.49	AVG	
5	*	5174.200	117.44	-1.16	116.28	68.30	47.98	peak	主波訊號不予判定
6	X	5174.200	109.24	-1.16	108.08	68.30	39.78	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

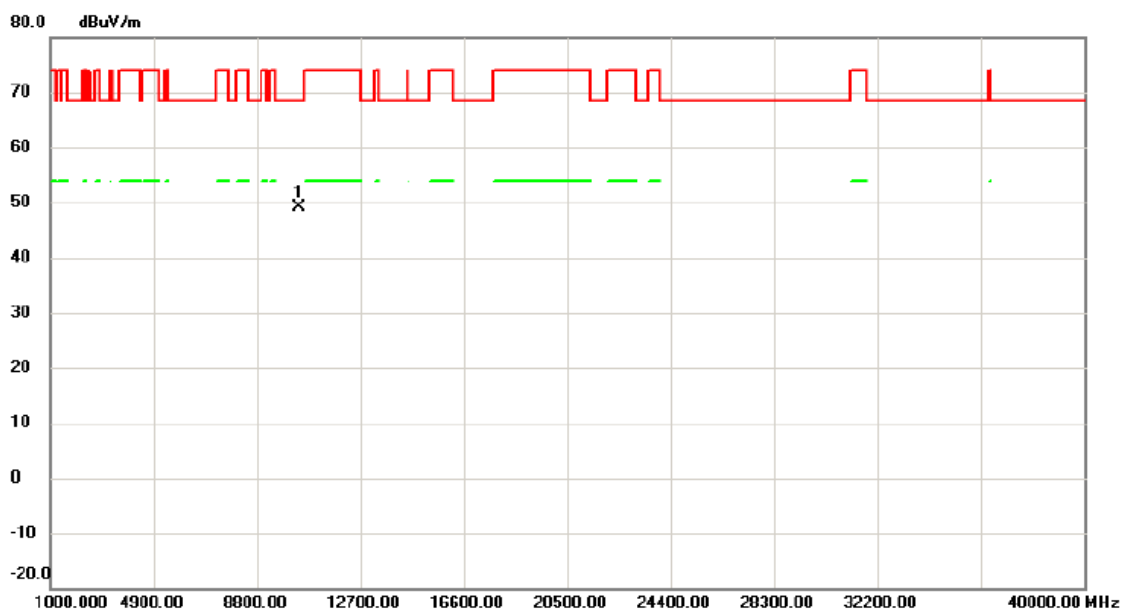

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10367.30	47.66	1.58	49.24	68.30	-19.06	peak	

測試頻道: IEEE 802.11n (HT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/28

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

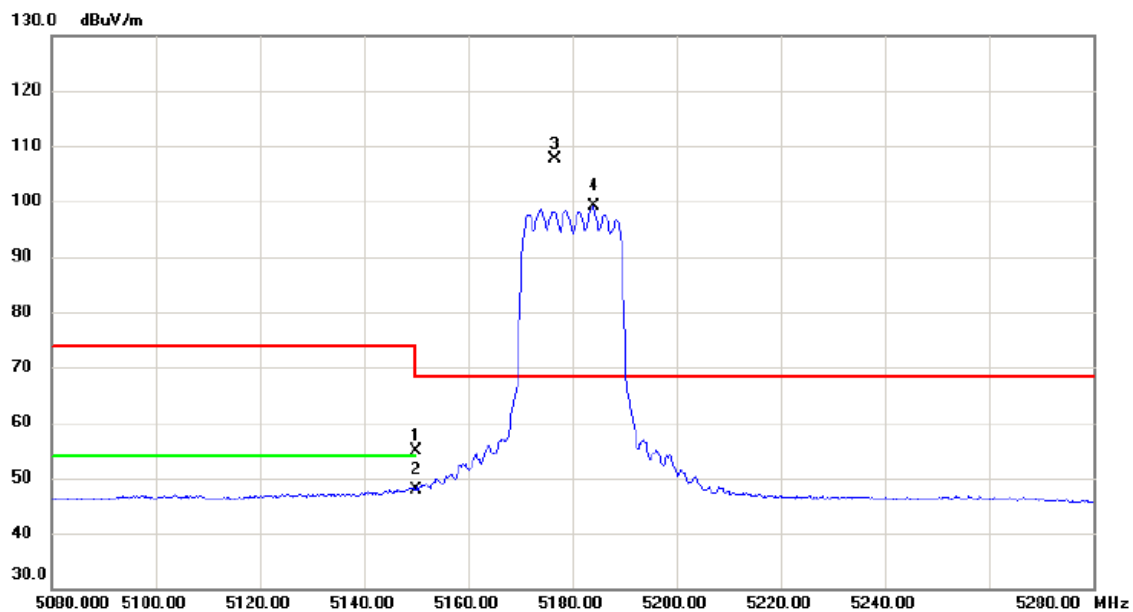

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	56.08	-1.17	54.91	74.00	-19.09	peak	
2		5150.000	49.13	-1.17	47.96	54.00	-6.04	AVG	
3	*	5176.600	108.75	-1.14	107.61	68.30	39.31	peak	主波訊號不予判定
4	X	5184.000	100.21	-1.15	99.06	68.30	30.76	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

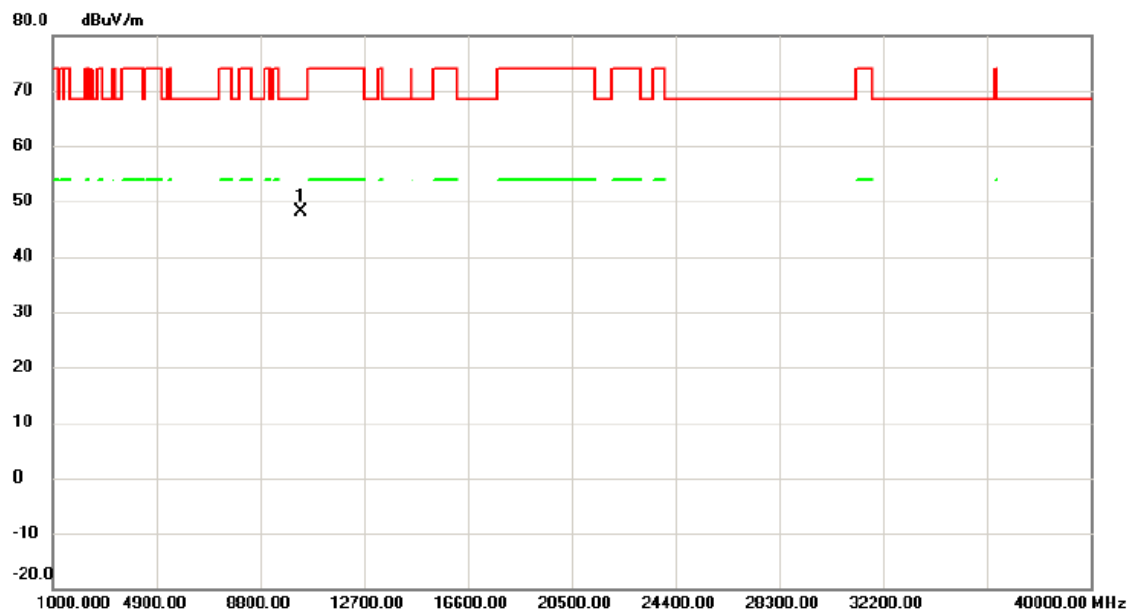


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10357.30	46.49	1.57	48.06	68.30	-20.24	peak	

測試頻道: IEEE 802.11n (HT20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

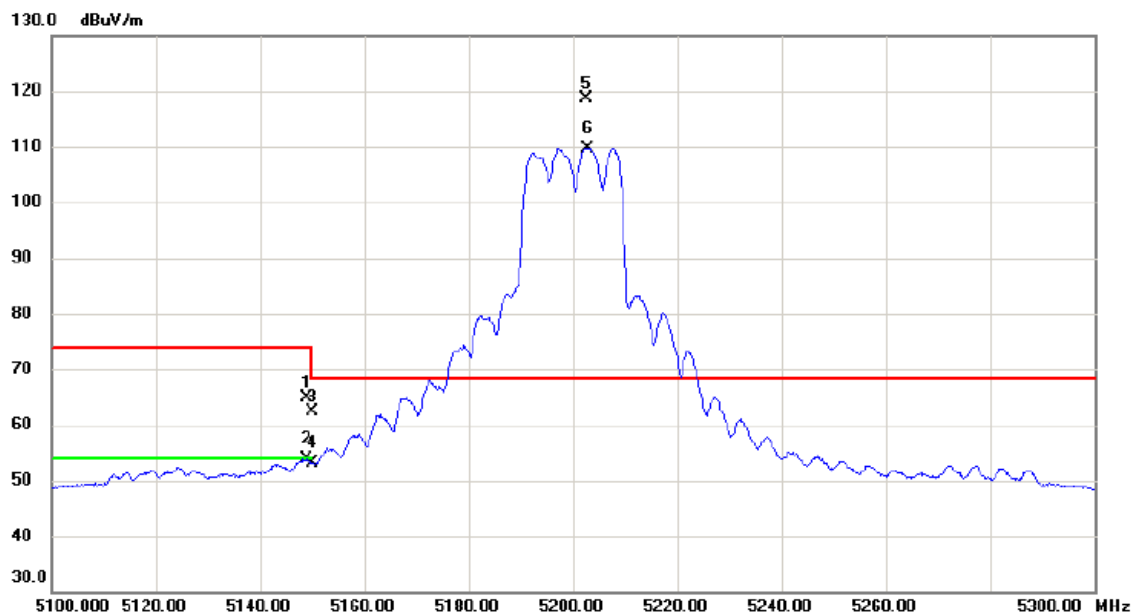


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5148.800	66.14	-1.17	64.97	74.00	-9.03	peak	
2		5148.800	55.09	-1.17	53.92	54.00	-0.08	AVG	
3		5150.000	63.55	-1.17	62.38	74.00	-11.62	peak	
4		5150.000	54.28	-1.17	53.11	54.00	-0.89	AVG	
5	*	5202.600	119.71	-1.13	118.58	68.30	50.28	peak	主波訊號不予判定
6	X	5202.800	110.82	-1.13	109.69	68.30	41.39	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

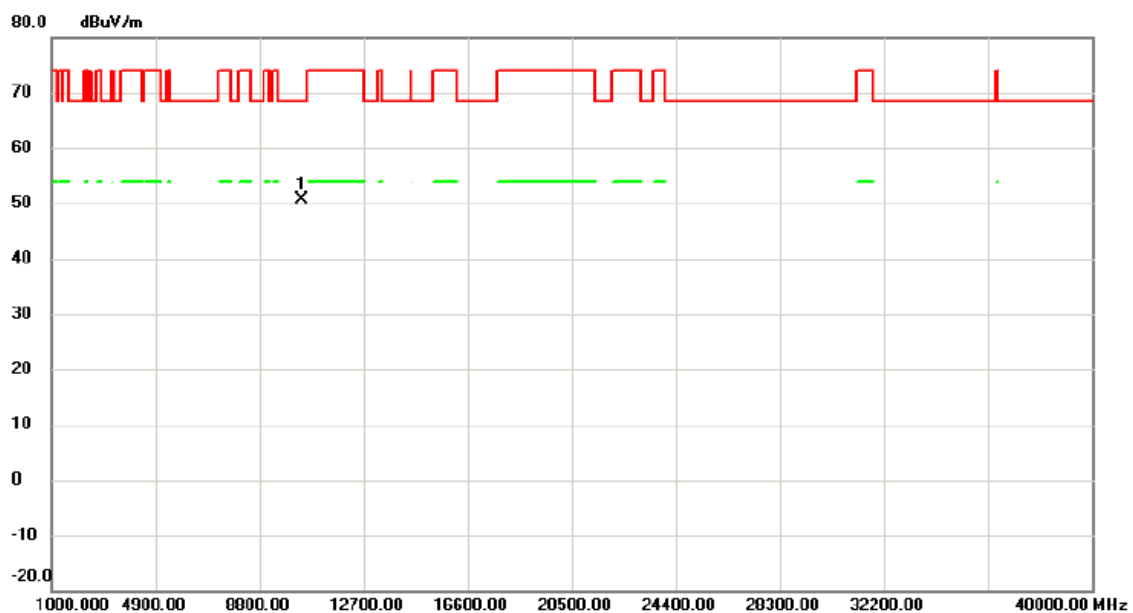


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10395.60	48.94	1.61	50.55	68.30	-17.75	peak	

測試頻道: IEEE 802.11n (HT20) /
 5200 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

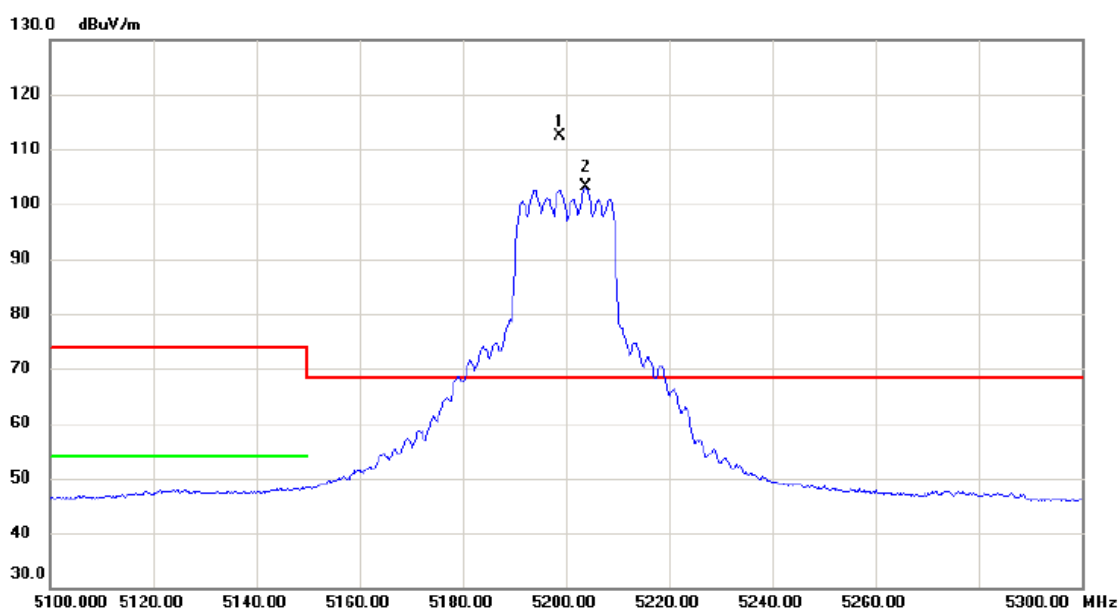


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5198.900	113.63	-1.13	112.50	68.30	44.20	peak	主波訊號不予判定
2	X	5203.900	104.26	-1.13	103.13	68.30	34.83	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

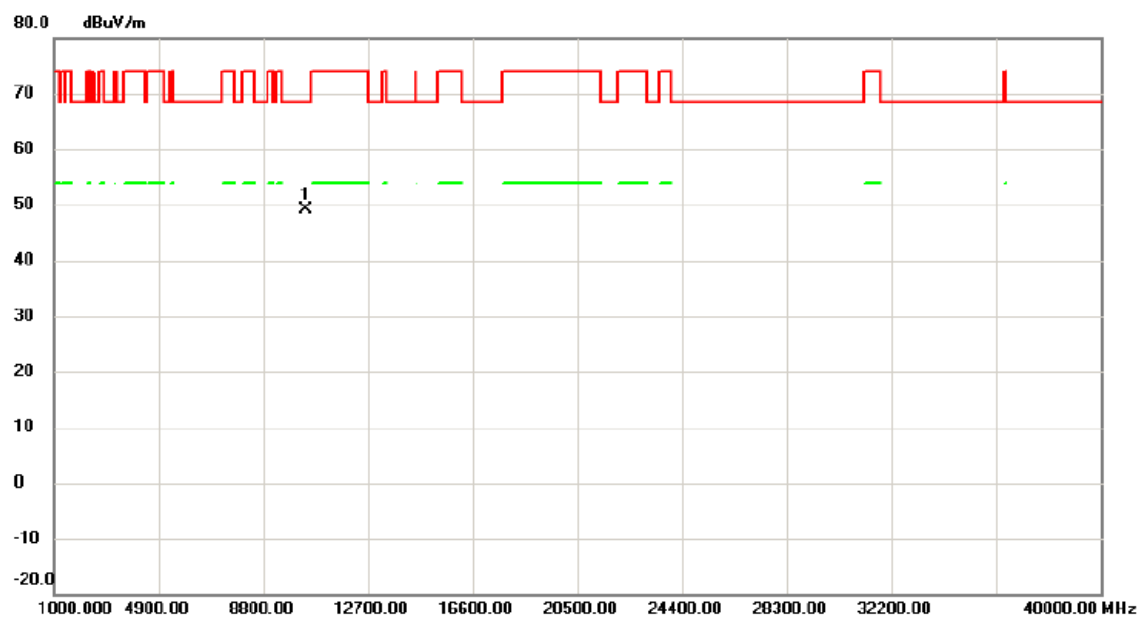

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10394.30	47.58	1.61	49.19	68.30	-19.11	peak	

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

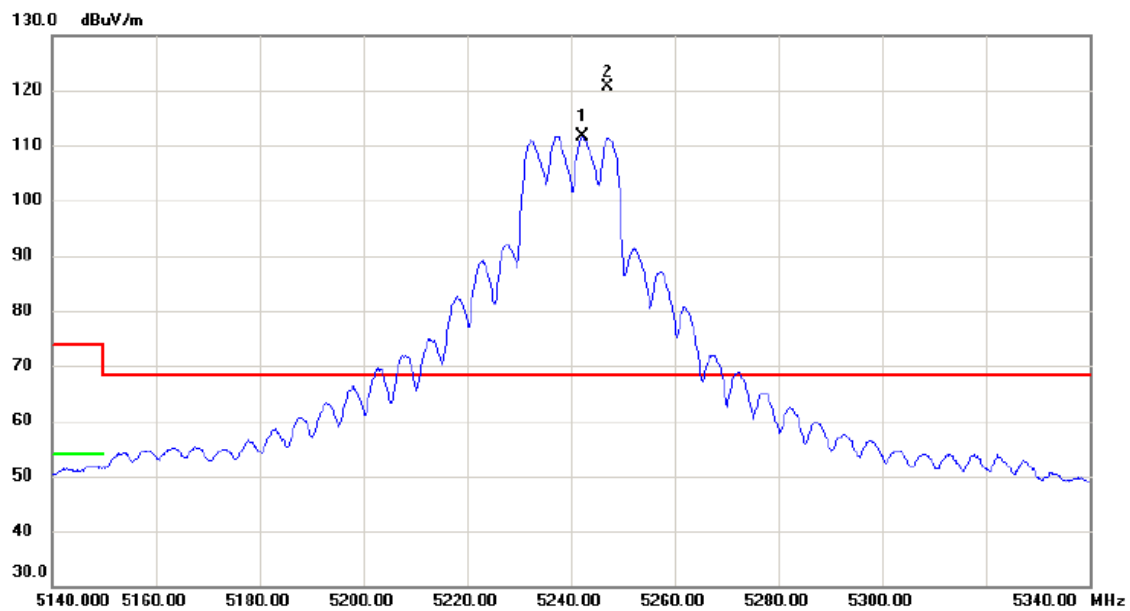


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5242.300	112.81	-1.09	111.72	68.30	43.42	AVG	主波訊號不予判定
2	*	5247.100	121.72	-1.09	120.63	68.30	52.33	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

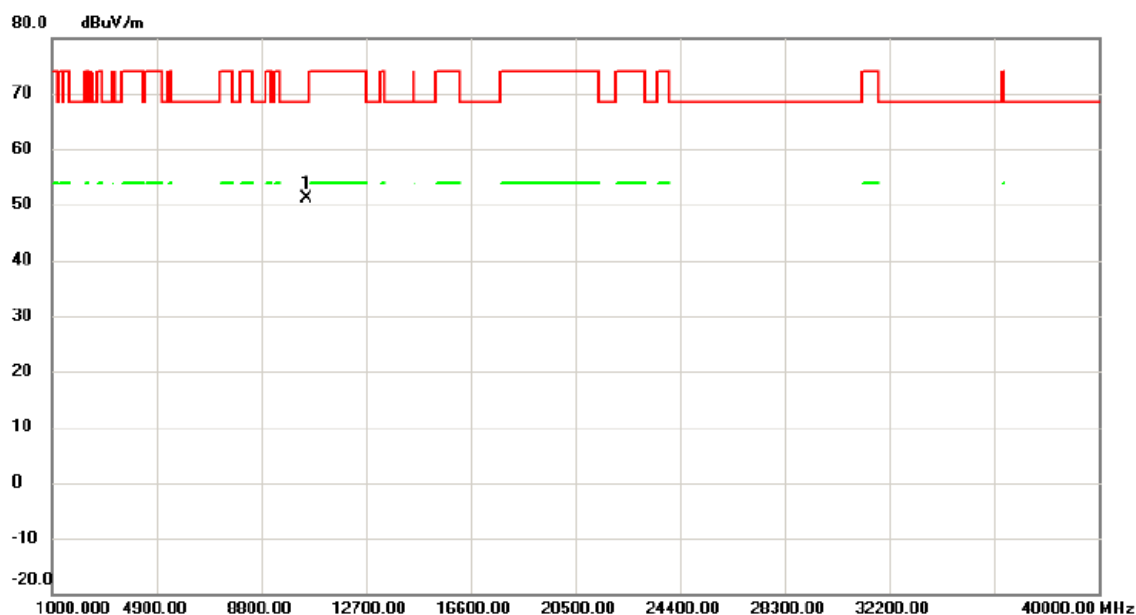

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10475.50	49.51	1.70	51.21	68.30	-17.09	peak	

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

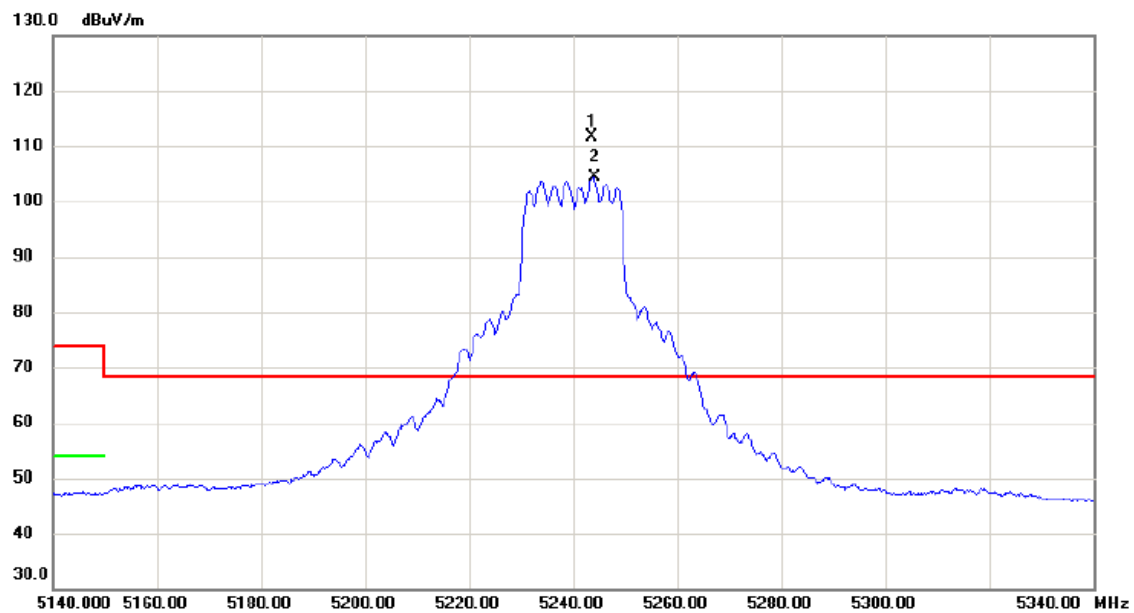

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5243.700	112.74	-1.09	111.65	68.30	43.35	peak	主波訊號不予判定
2	X	5244.000	105.52	-1.09	104.43	68.30	36.13	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/05

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

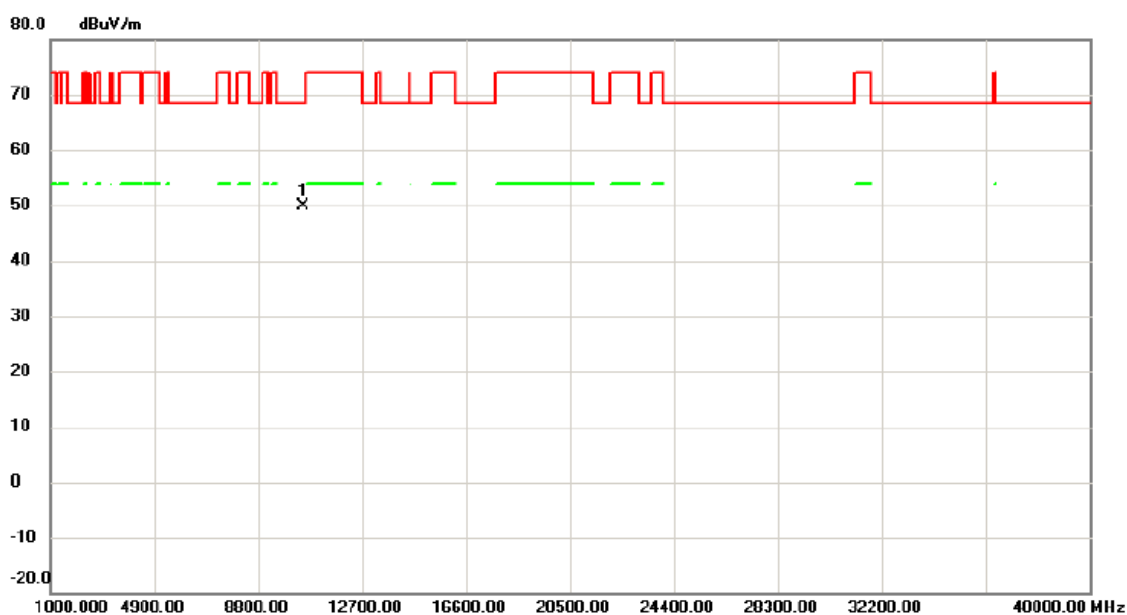

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10485.45	48.27	1.71	49.98	68.30	-18.32	peak	

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

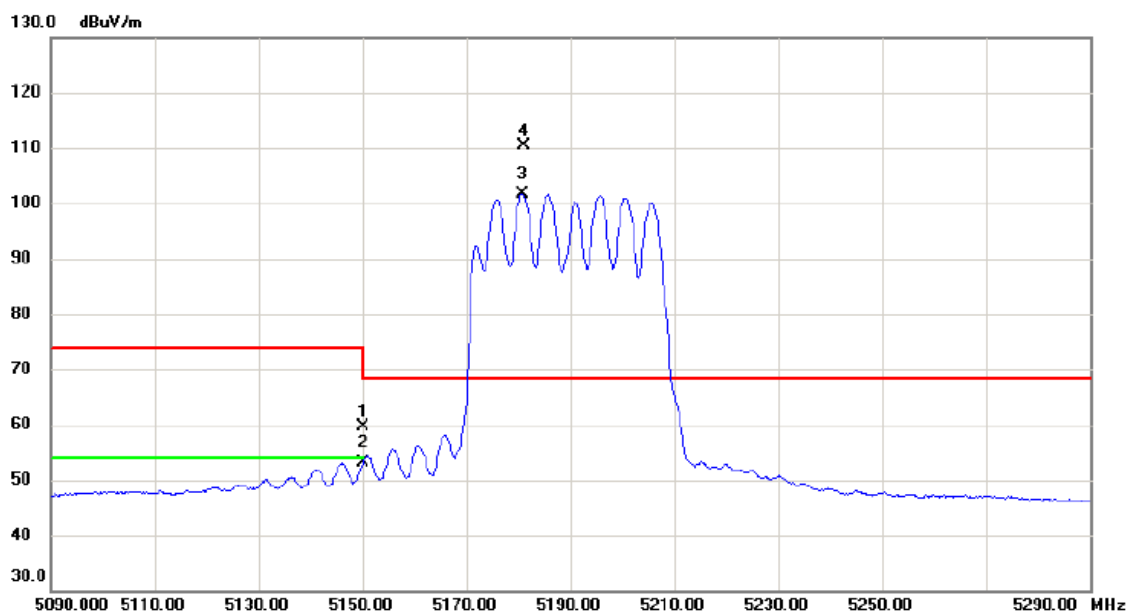


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	60.81	-1.17	59.64	74.00	-14.36	peak	
2		5150.000	54.28	-1.17	53.11	54.00	-0.89	AVG	
3	X	5180.800	102.75	-1.15	101.60	68.30	33.30	AVG	主波訊號不予判定
4	*	5181.000	111.64	-1.15	110.49	68.30	42.19	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

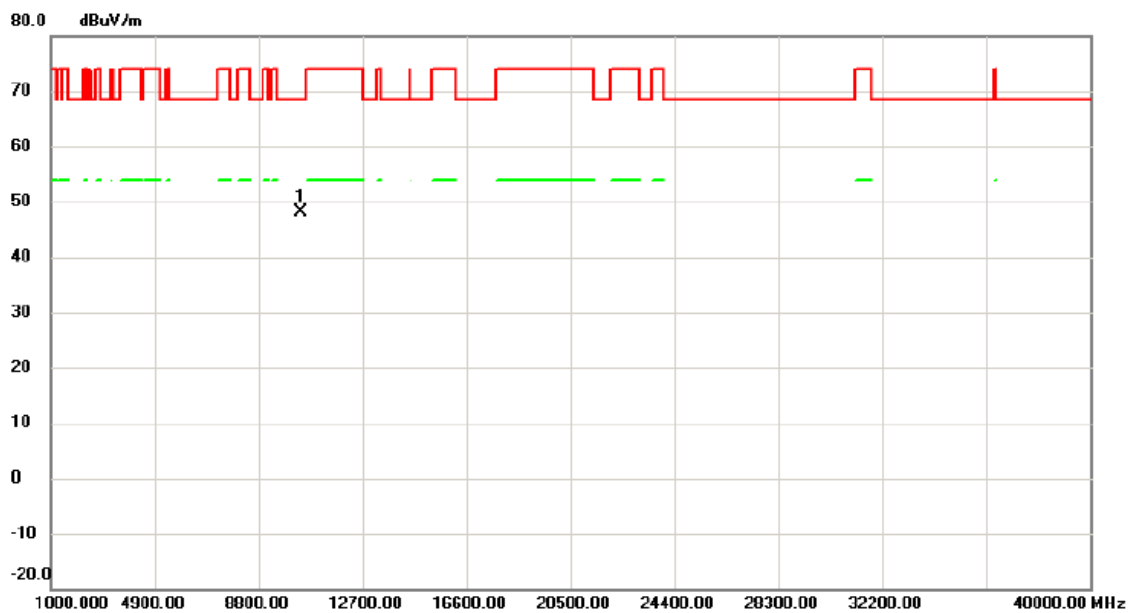

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10368.90	46.57	1.59	48.16	68.30	-20.14	peak	

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

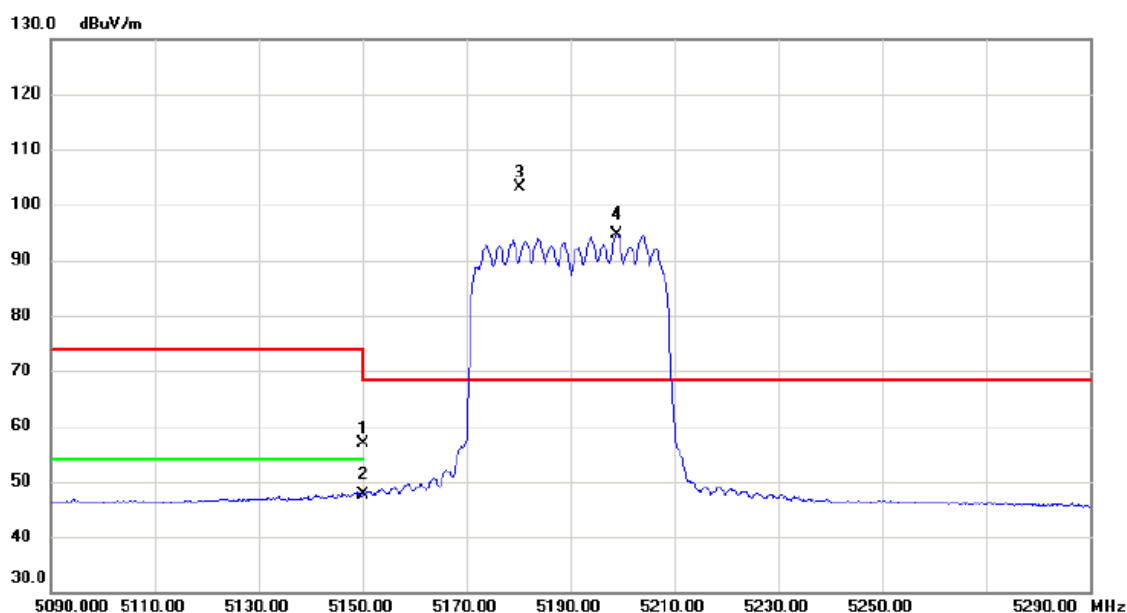

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	58.03	-1.17	56.86	74.00	-17.14	peak	
2		5150.000	48.89	-1.17	47.72	54.00	-6.28	AVG	
3	*	5180.400	104.20	-1.14	103.06	68.30	34.76	peak	主波訊號不予判定
4	X	5199.000	95.85	-1.13	94.72	68.30	26.42	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/05

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

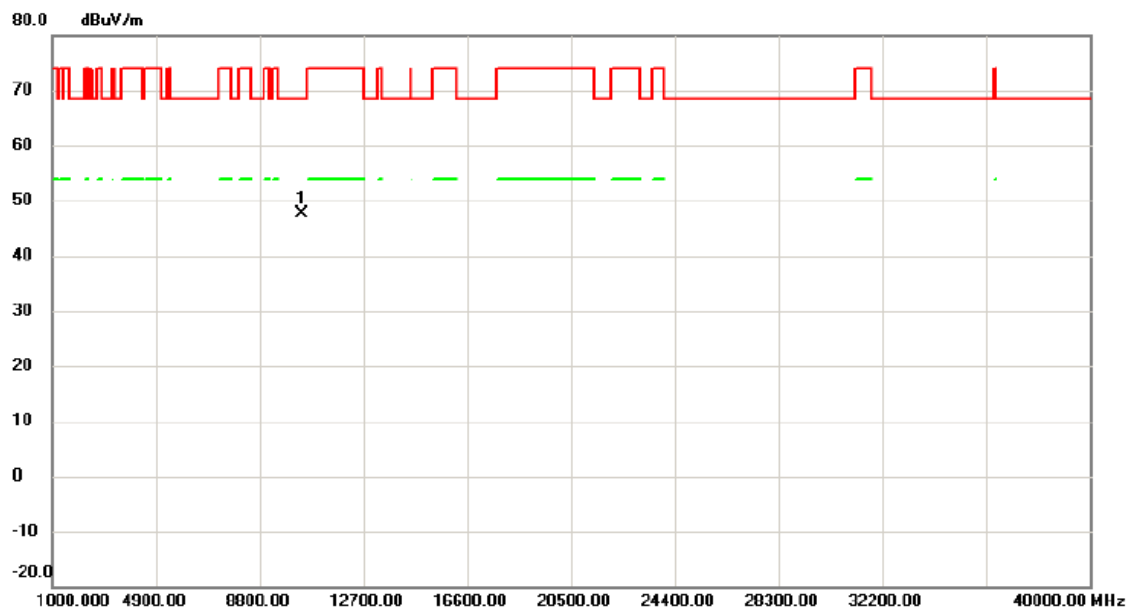

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10383.00	46.00	1.60	47.60	68.30	-20.70	peak	

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

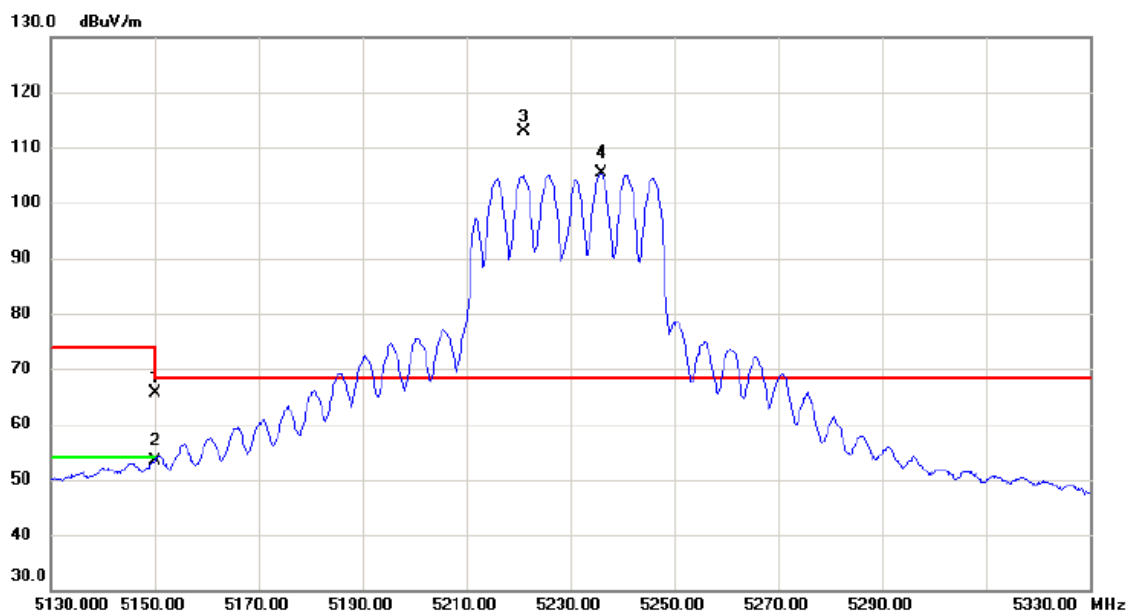


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	66.84	-1.17	65.67	74.00	-8.33	peak	
2		5150.000	54.53	-1.17	53.36	54.00	-0.64	AVG	
3	*	5221.200	114.00	-1.12	112.88	68.30	44.58	peak	主波訊號不予判定
4	X	5236.000	106.54	-1.10	105.44	68.30	37.14	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

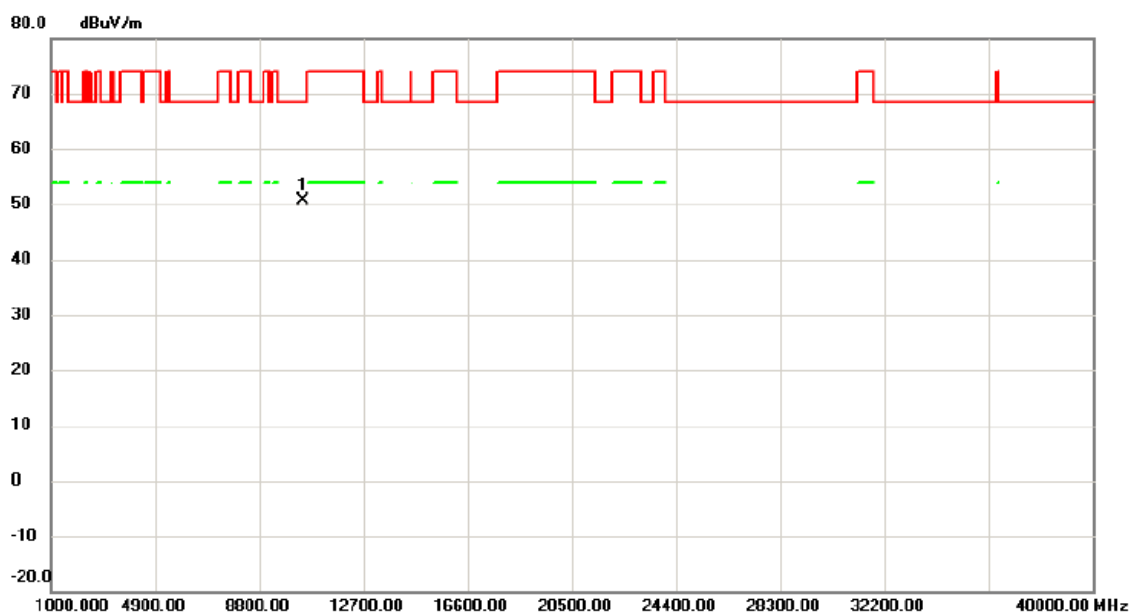

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10459.10	49.00	1.68	50.68	68.30	-17.62	peak	

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

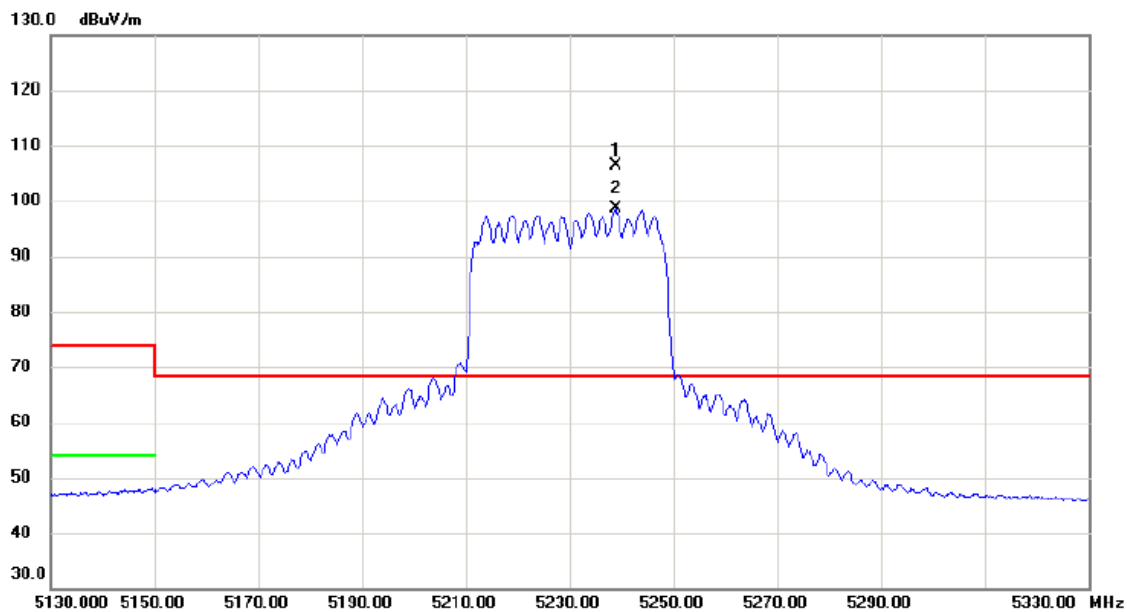


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5238.900	107.61	-1.11	106.50	68.30	38.20	peak	主波訊號不予判定
2	X	5238.900	99.67	-1.11	98.56	68.30	30.26	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

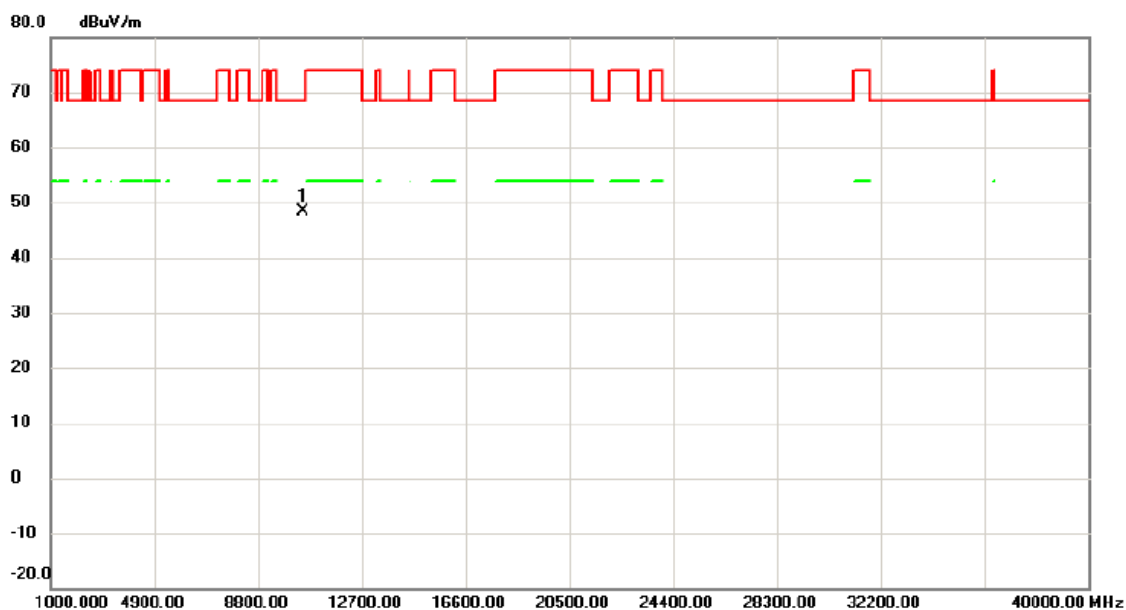


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10474.35	46.68	1.69	48.37	68.30	-19.93	peak	

測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

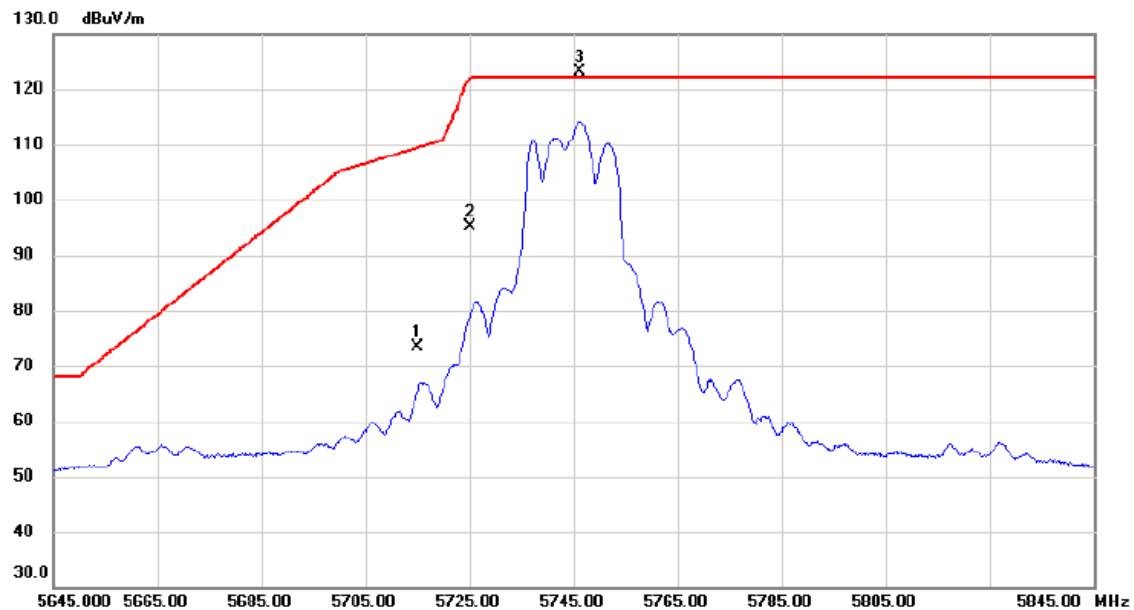


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	73.65	-0.35	73.30	109.40	-36.10	peak	
2		5725.000	95.55	-0.31	95.24	122.20	-26.96	peak	
3	*	5746.200	123.31	-0.26	123.05	122.20	0.85	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

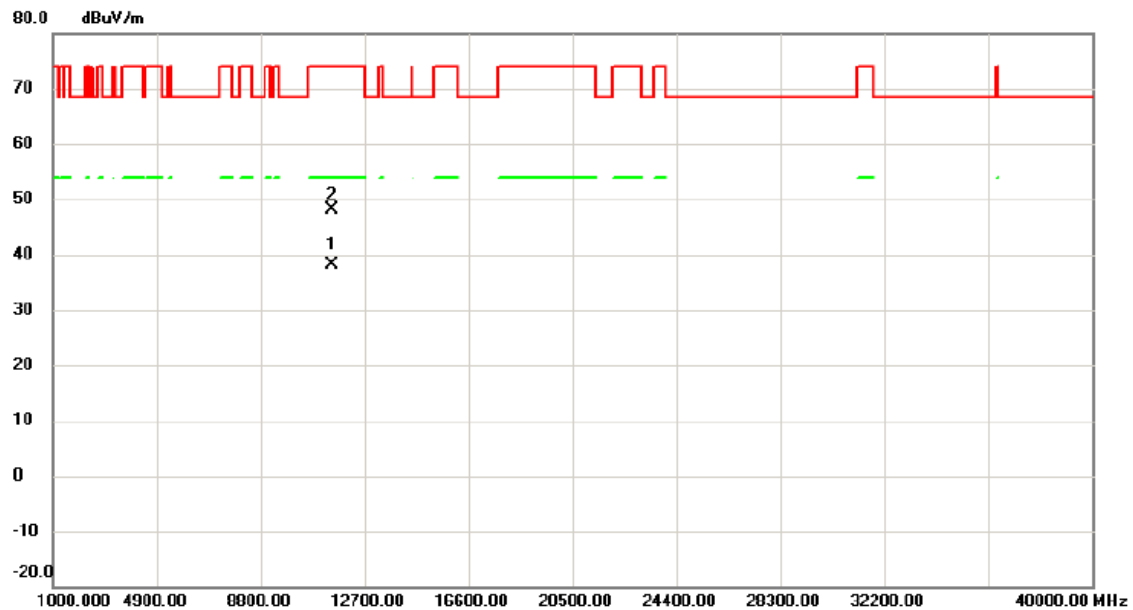


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11492.50	35.14	2.90	38.04	54.00	-15.96	AVG	
2		11501.40	45.25	2.91	48.16	74.00	-25.84	peak	

測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

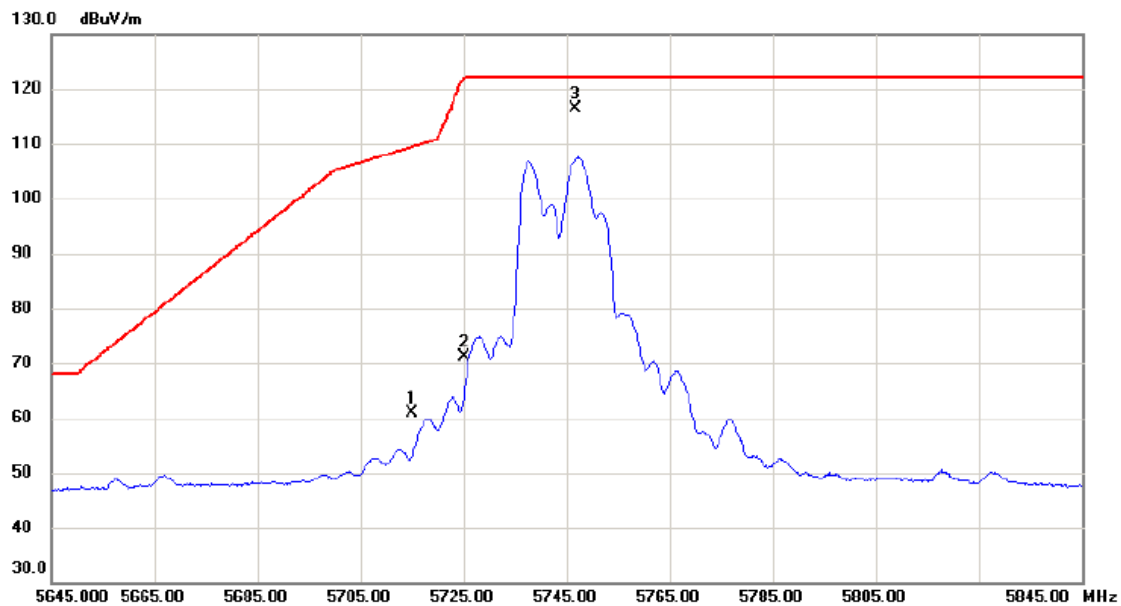

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	61.26	-0.35	60.91	109.40	-48.49	peak	
2		5725.000	71.55	-0.31	71.24	122.20	-50.96	peak	
3	*	5746.700	116.70	-0.26	116.44	122.20	-5.76	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/05

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

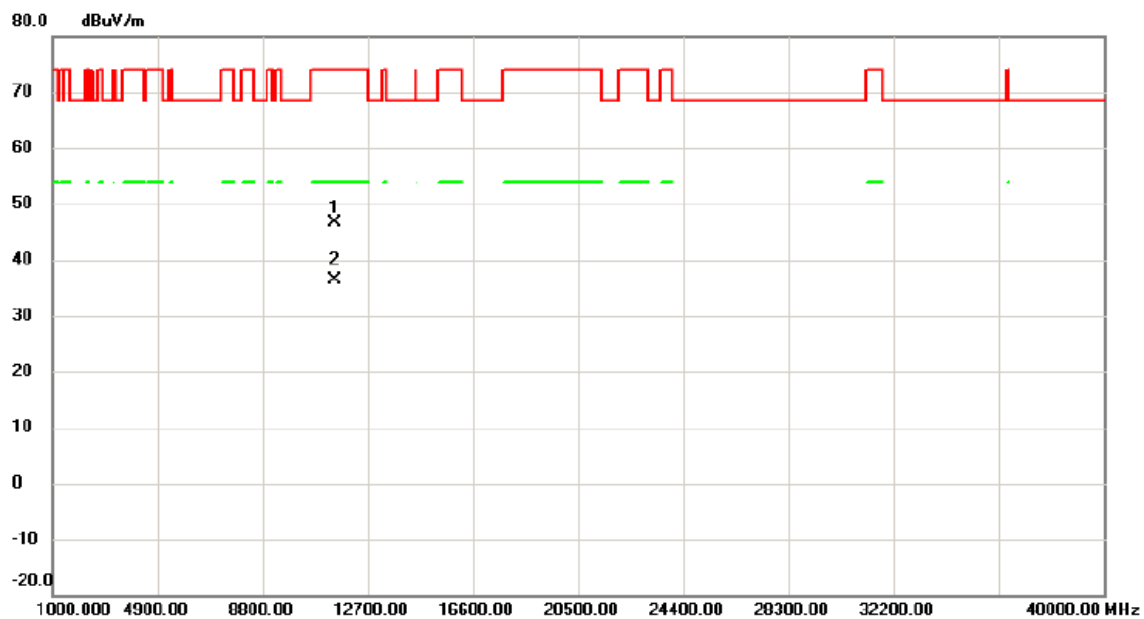

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11484.45	43.82	2.90	46.72	74.00	-27.28	peak	
2	*	11485.55	33.48	2.90	36.38	54.00	-17.62	AVG	

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5786.900	122.75	-0.15	122.60	122.20	0.40	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/05
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

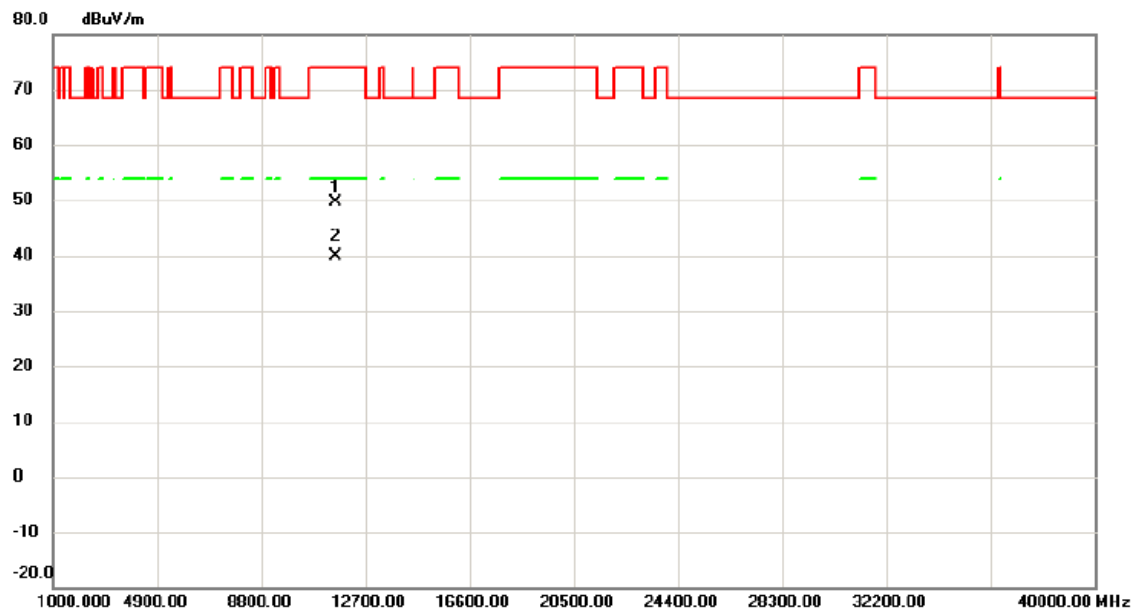


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11572.20	46.88	2.71	49.59	74.00	-24.41	peak	
2	*	11572.65	37.17	2.71	39.88	54.00	-14.12	AVG	

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

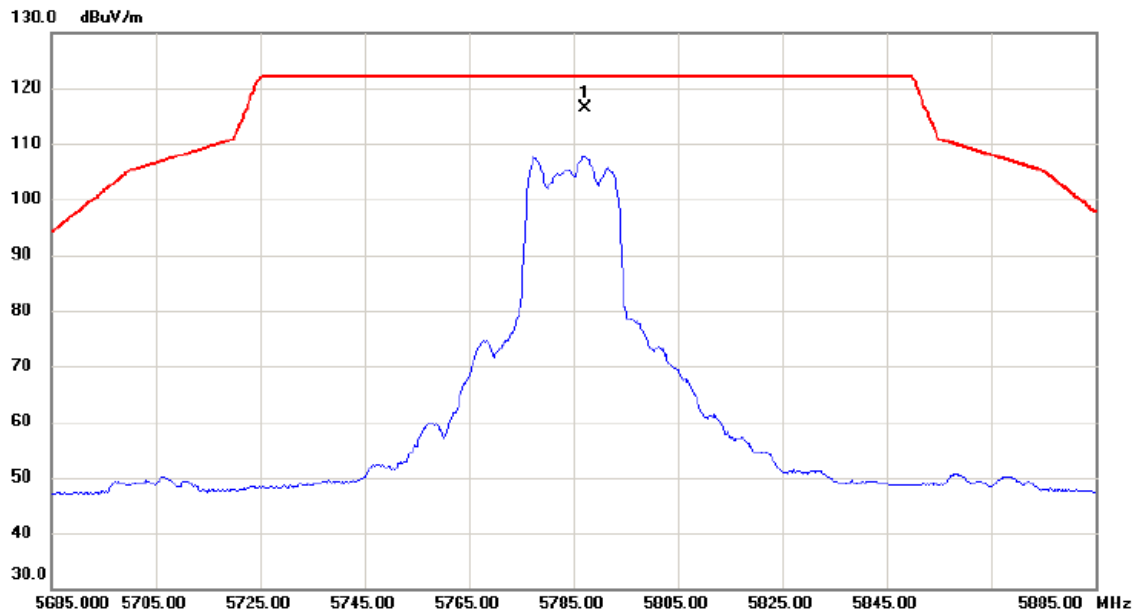


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5787.400	116.57	-0.15	116.42	122.20	-5.78	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

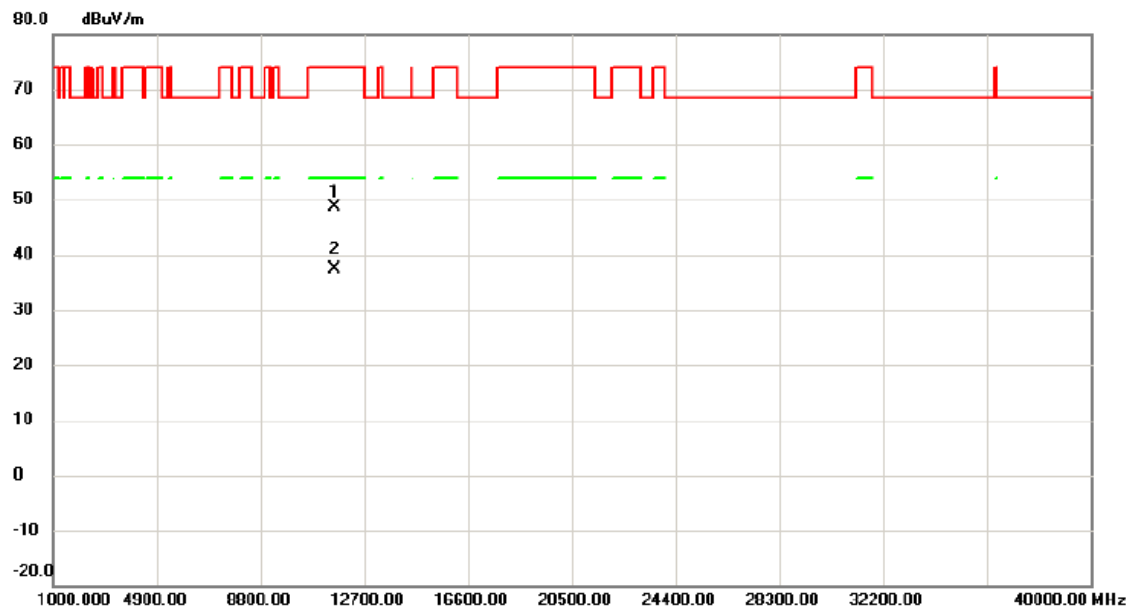


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11564.00	45.96	2.74	48.70	74.00	-25.30	peak	
2	*	11573.85	34.63	2.71	37.34	54.00	-16.66	AVG	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

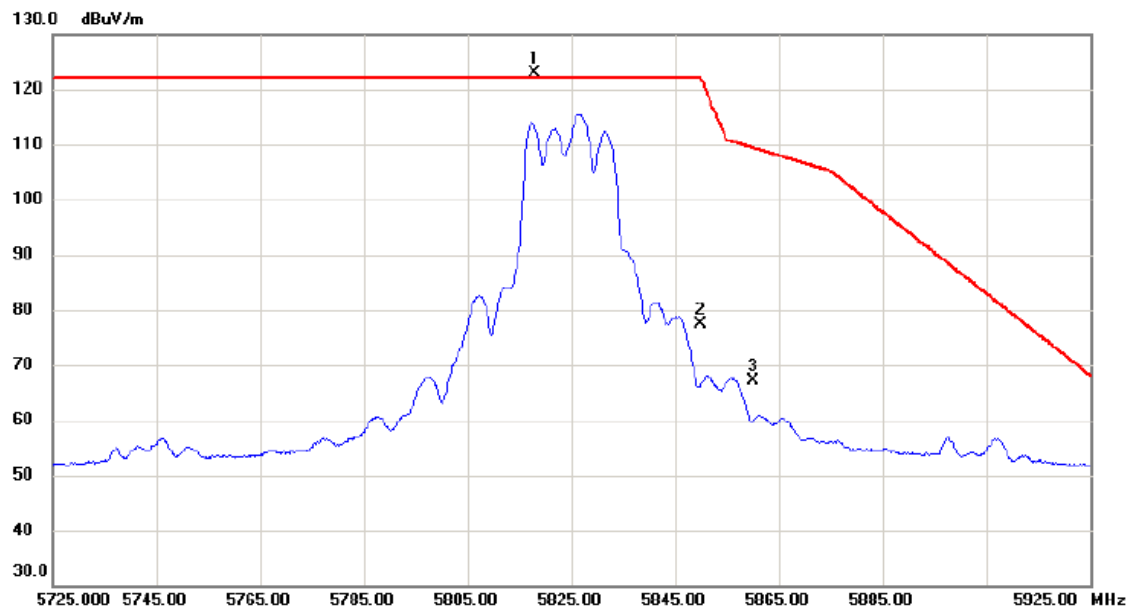


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5818.000	122.93	-0.08	122.85	122.20	0.65	peak	主波訊號不予判定
2		5850.000	77.31	0.00	77.31	122.20	-44.89	peak	
3		5860.000	67.01	0.03	67.04	109.40	-42.36	peak	

測試頻道: IEEE 802.11a / 5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

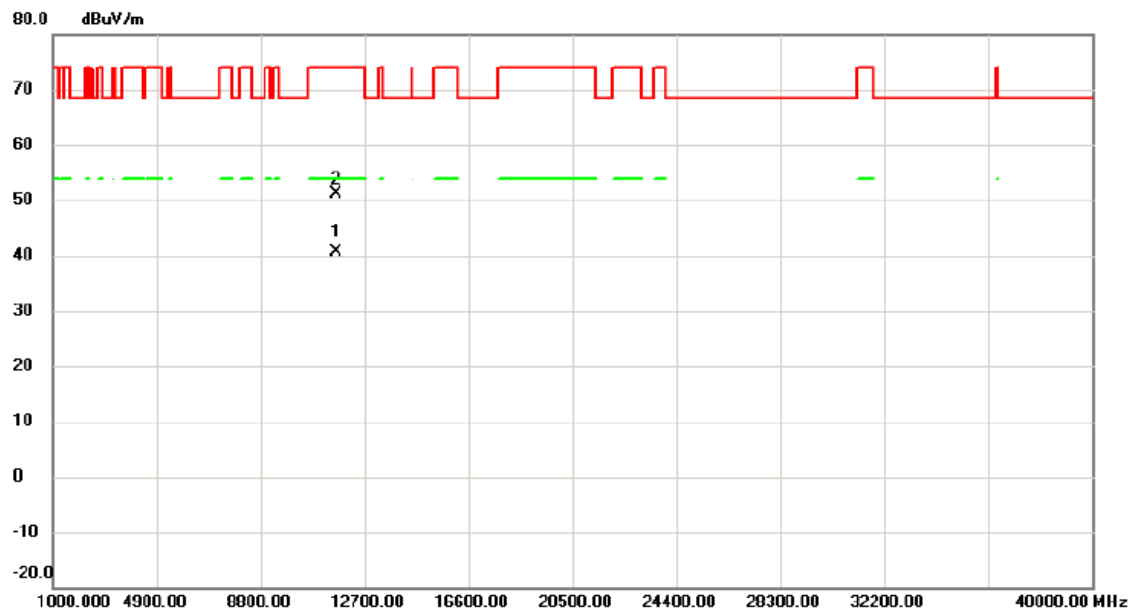


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11652.90	38.18	2.49	40.67	54.00	-13.33	AVG	
2		11653.60	48.56	2.49	51.05	74.00	-22.95	peak	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

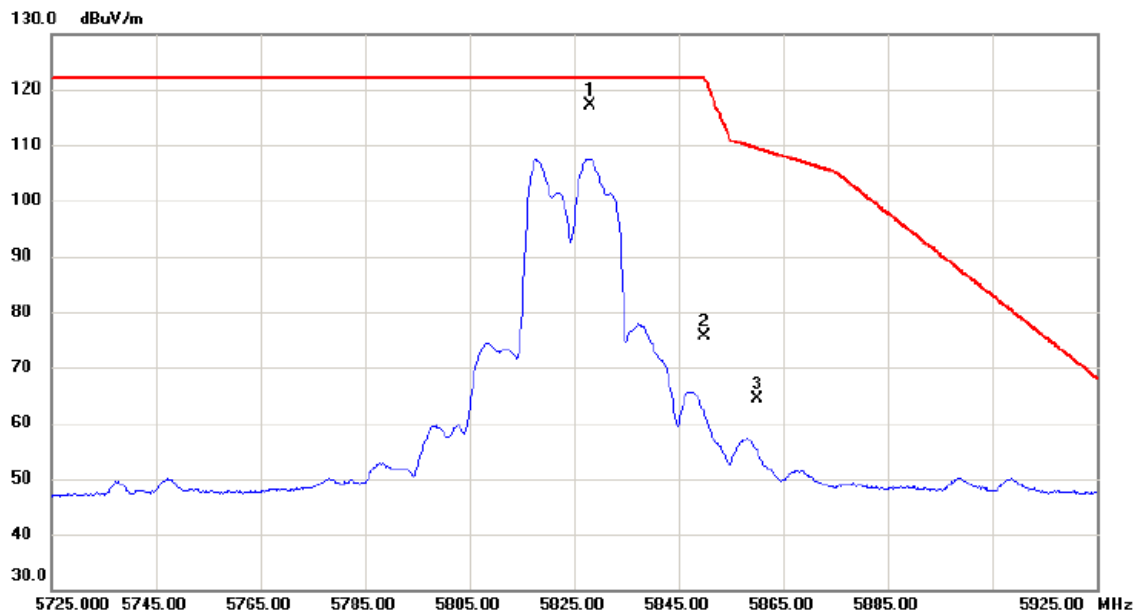


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5828.100	117.20	-0.06	117.14	122.20	-5.06	peak	主波訊號不予判定
2		5850.000	75.54	0.00	75.54	122.20	-46.66	peak	
3		5860.000	64.36	0.03	64.39	109.40	-45.01	peak	

測試頻道: IEEE 802.11a / 5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

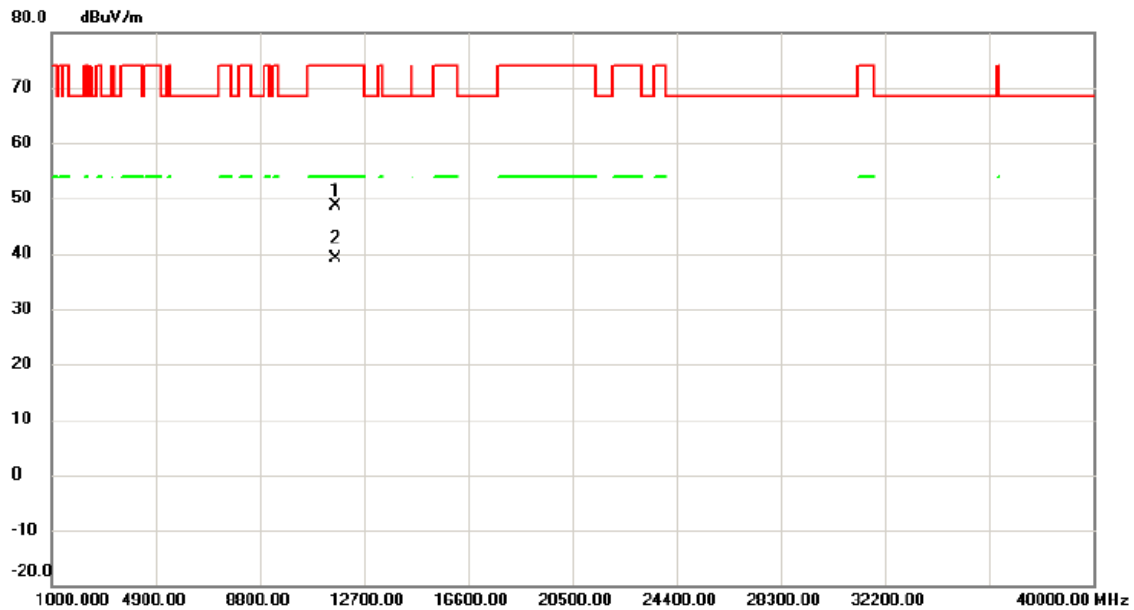


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11652.95	46.24	2.49	48.73	74.00	-25.27	peak	
2	*	11653.00	36.75	2.49	39.24	54.00	-14.76	AVG	

測試頻道: IEEE 802.11n (HT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

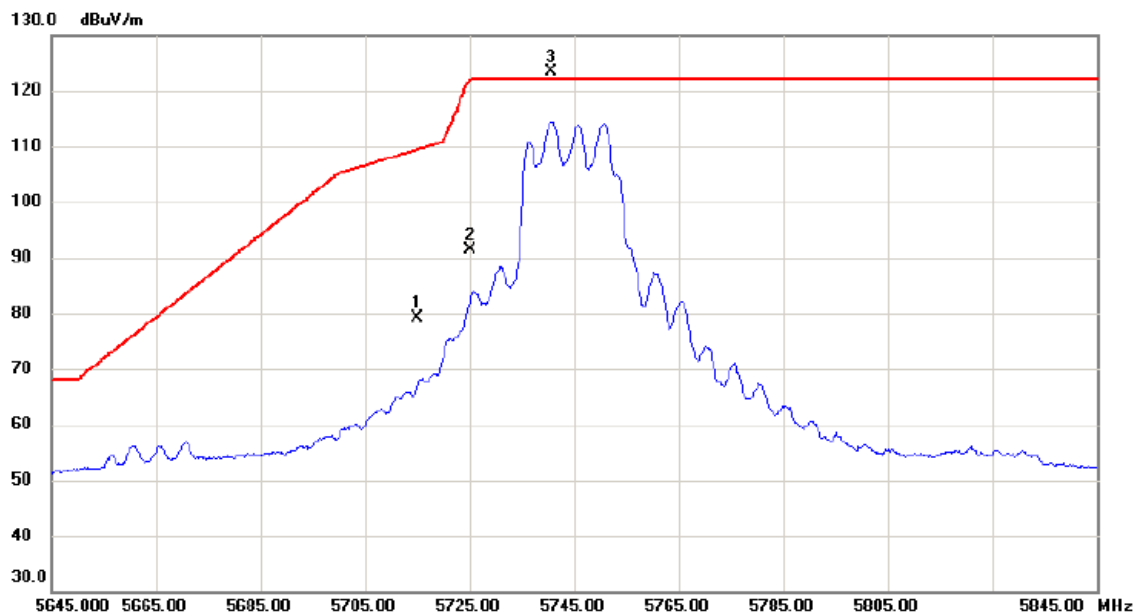

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	79.42	-0.35	79.07	109.40	-30.33	peak	
2		5725.000	91.62	-0.31	91.31	122.20	-30.89	peak	
3	*	5740.700	123.55	-0.26	123.29	122.20	1.09	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) / 5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

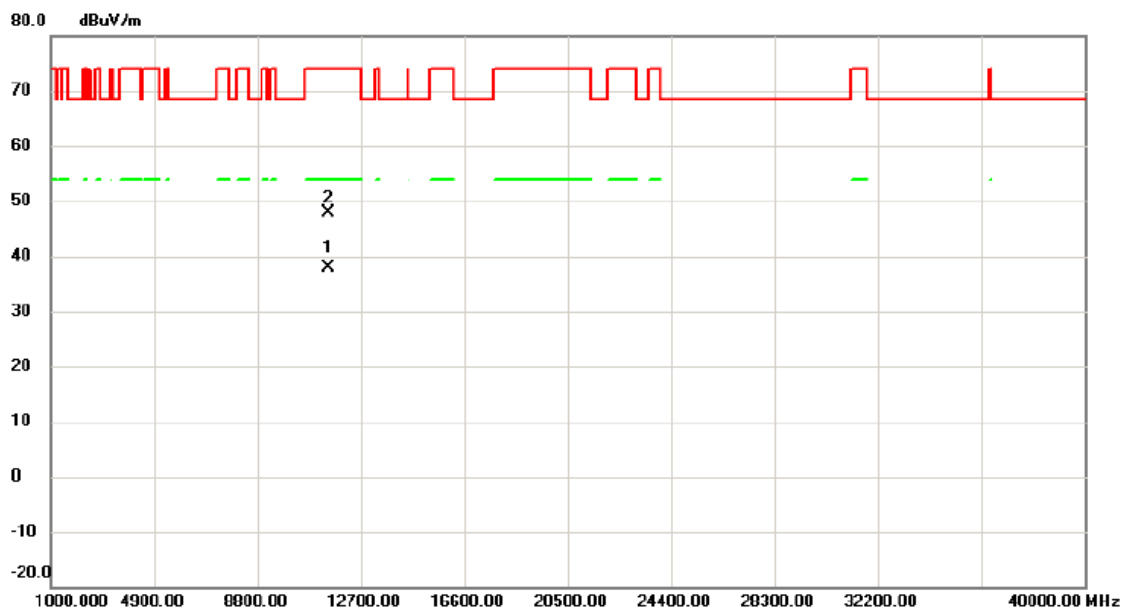

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11488.10	35.05	2.89	37.94	54.00	-16.06	AVG	
2		11493.20	44.89	2.91	47.80	74.00	-26.20	peak	

測試頻道: IEEE 802.11n (HT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

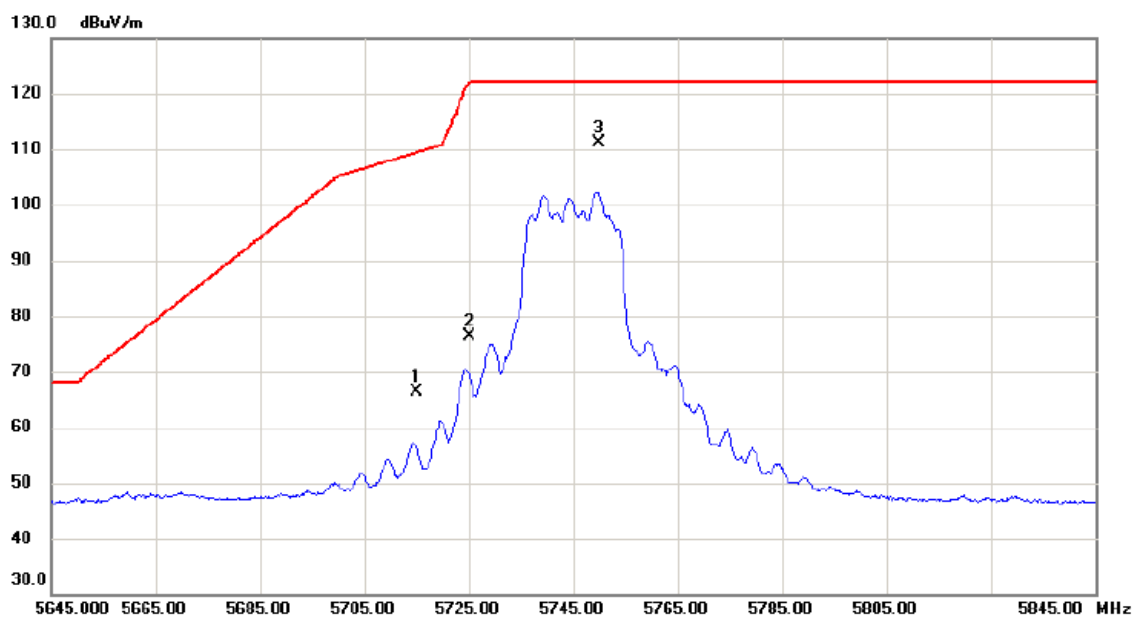

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	66.78	-0.35	66.43	109.40	-42.97	peak	
2		5725.000	76.64	-0.31	76.33	122.20	-45.87	peak	
3	*	5750.000	111.30	-0.25	111.05	122.20	-11.15	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

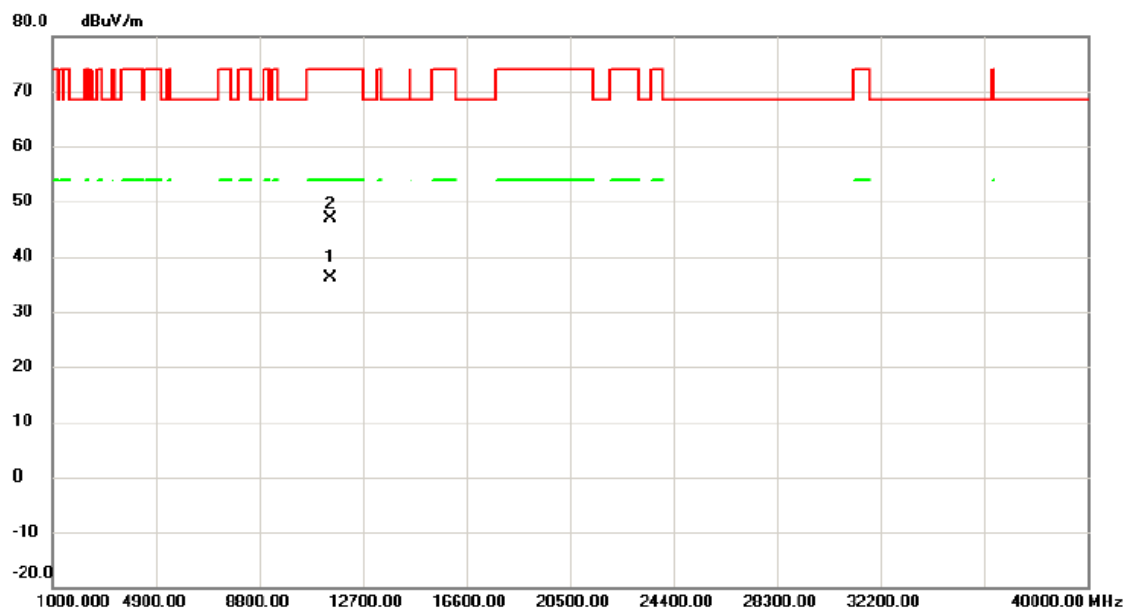

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11489.20	33.27	2.89	36.16	54.00	-17.84	AVG	
2		11499.90	43.87	2.91	46.78	74.00	-27.22	peak	

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

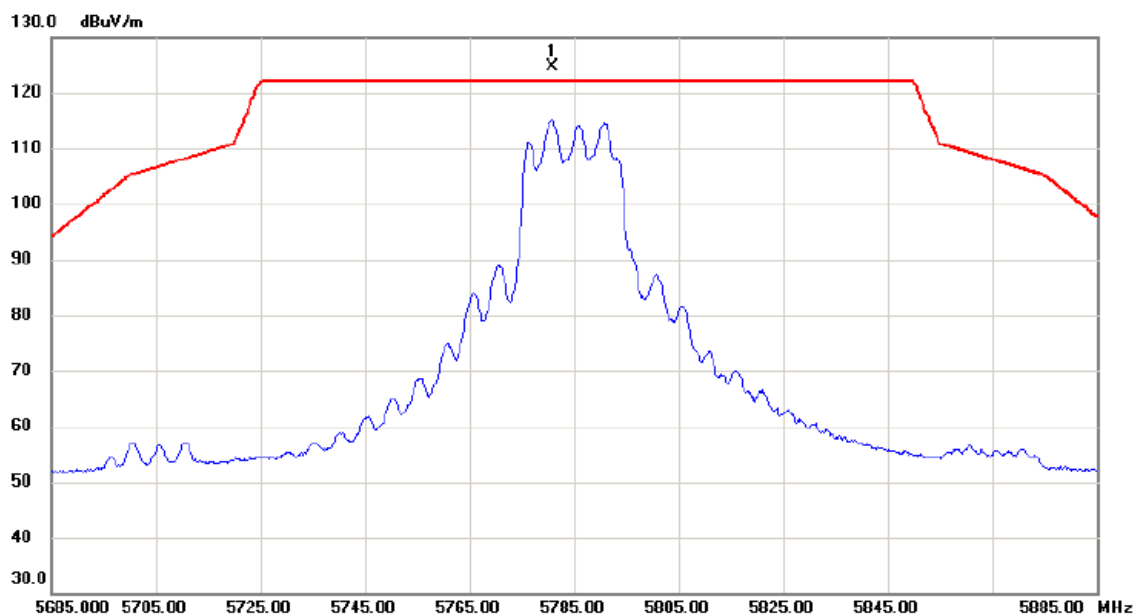


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5780.900	124.80	-0.18	124.62	122.20	2.42	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/05
 環境濕度: 66%

Orthogonal Axis: X Polarization: Vertical

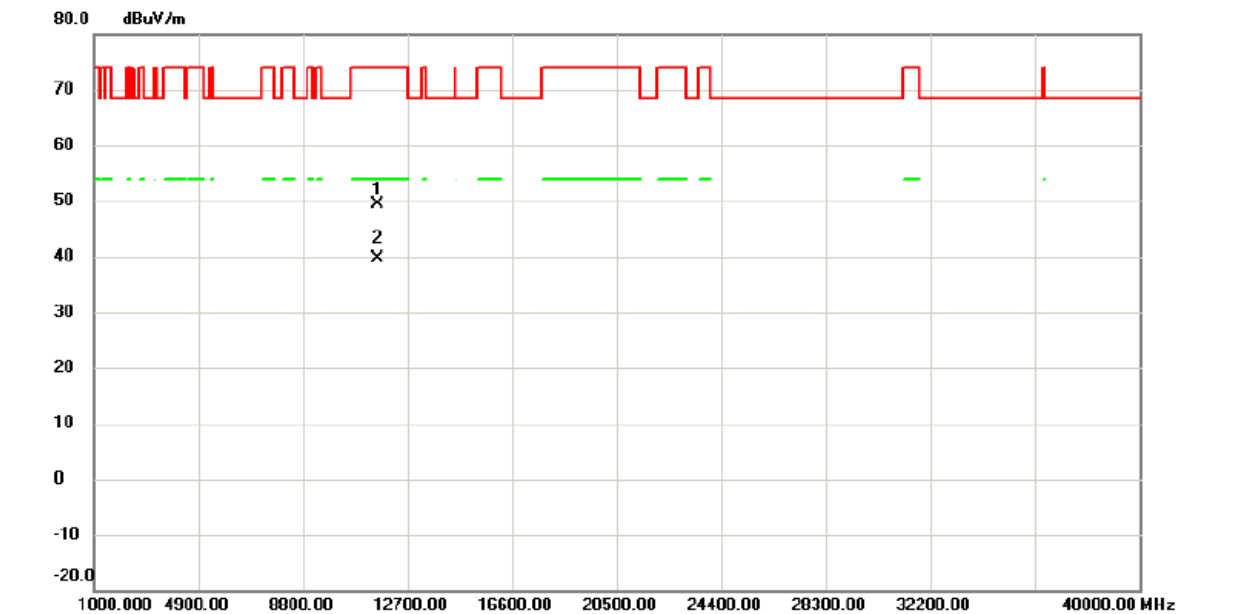


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11561.90	46.66	2.74	49.40	74.00	-24.60	peak	
2	*	11568.35	36.99	2.73	39.72	54.00	-14.28	AVG	

測試頻道: IEEE 802.11n (HT20) /
 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

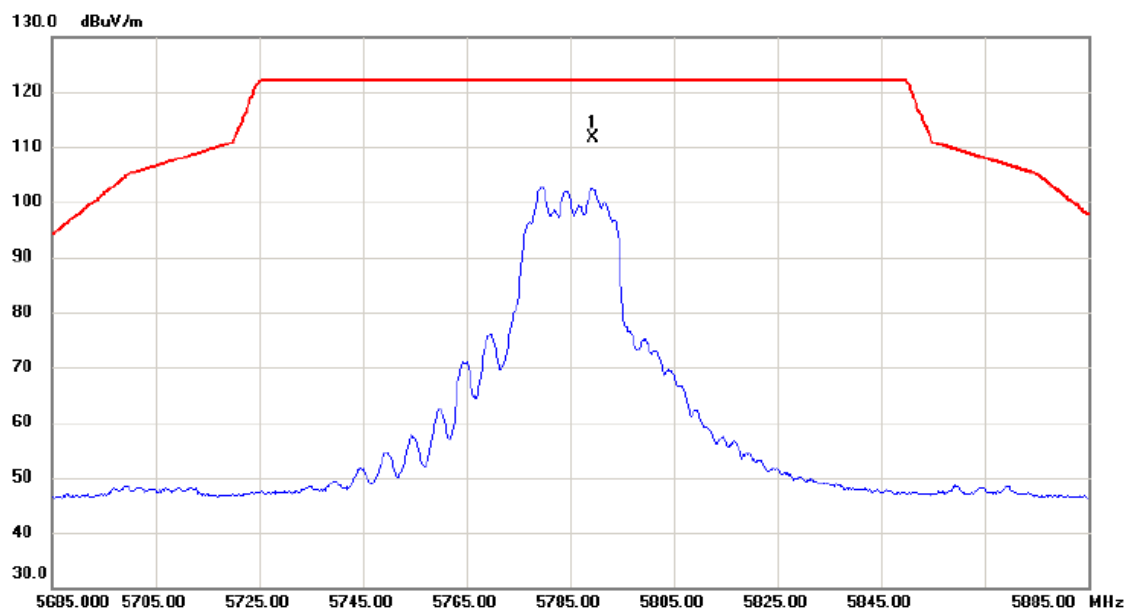


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5789.400	111.76	-0.15	111.61	122.20	-10.59	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

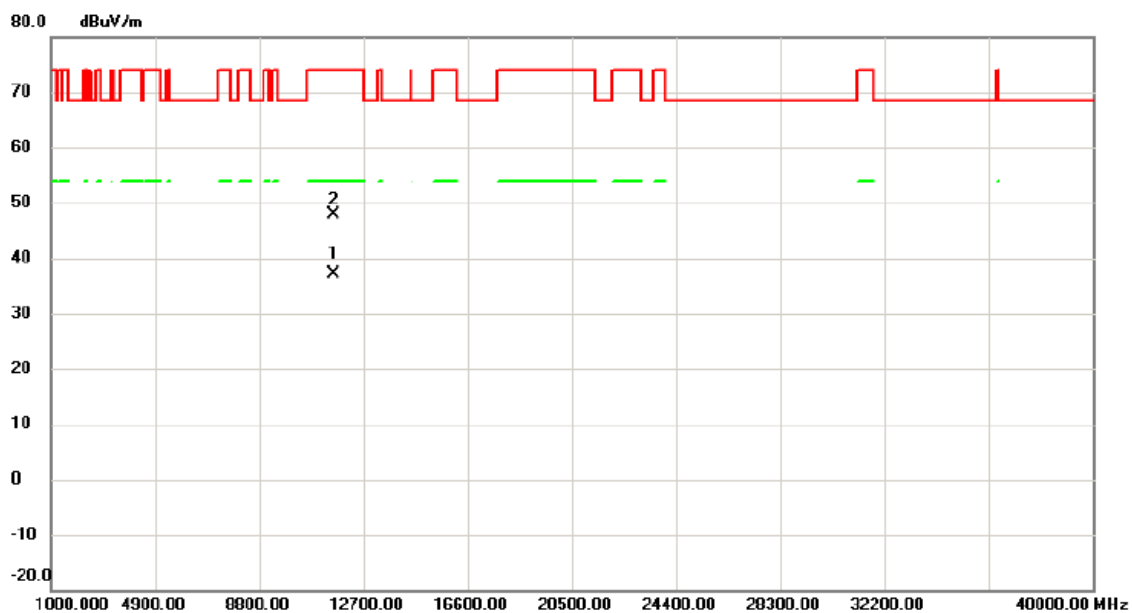


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11568.10	34.30	2.73	37.03	54.00	-16.97	AVG	
2		11576.60	45.27	2.70	47.97	74.00	-26.03	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

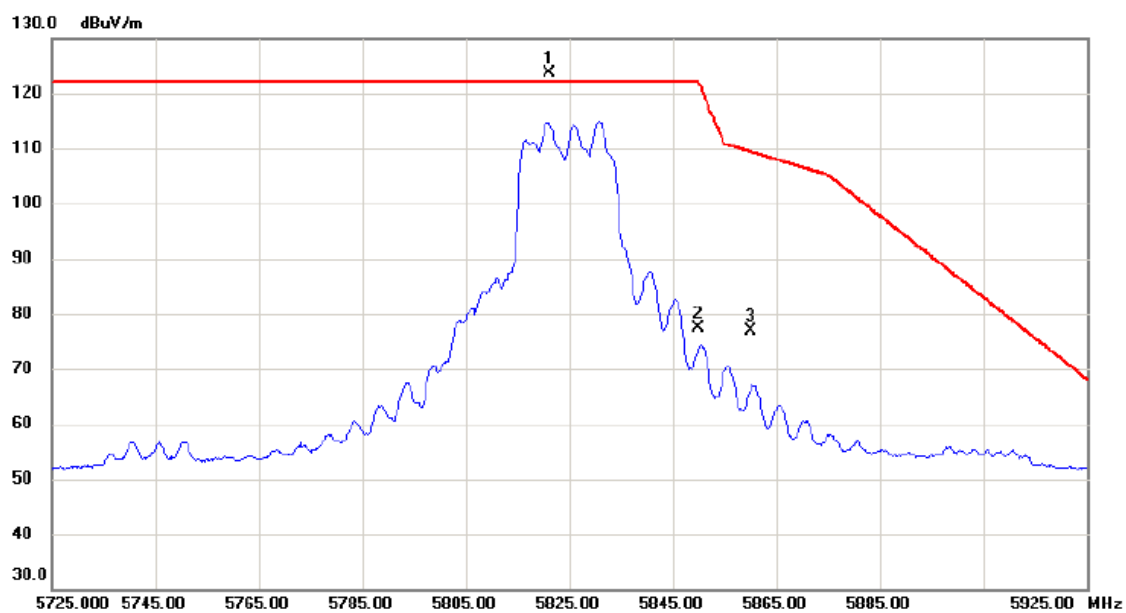

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5821.000	123.82	-0.08	123.74	122.20	1.54	peak	主波訊號不予判定
2		5850.000	77.49	0.00	77.49	122.20	-44.71	peak	
3		5860.000	76.80	0.03	76.83	109.40	-32.57	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/05

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

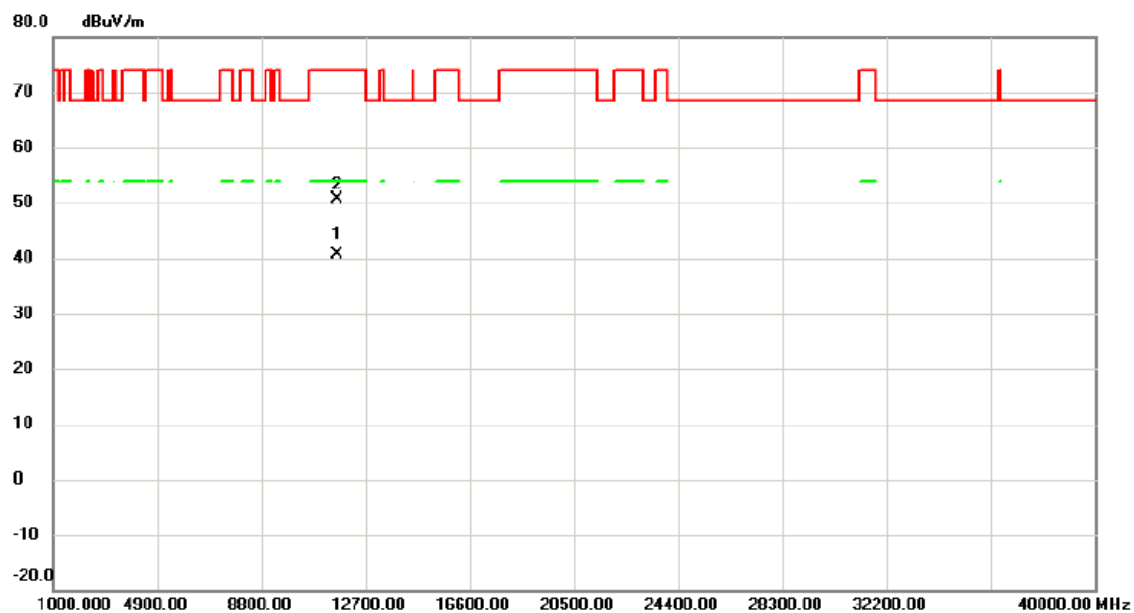


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11648.25	38.24	2.50	40.74	54.00	-13.26	AVG	
2		11657.90	48.07	2.48	50.55	74.00	-23.45	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

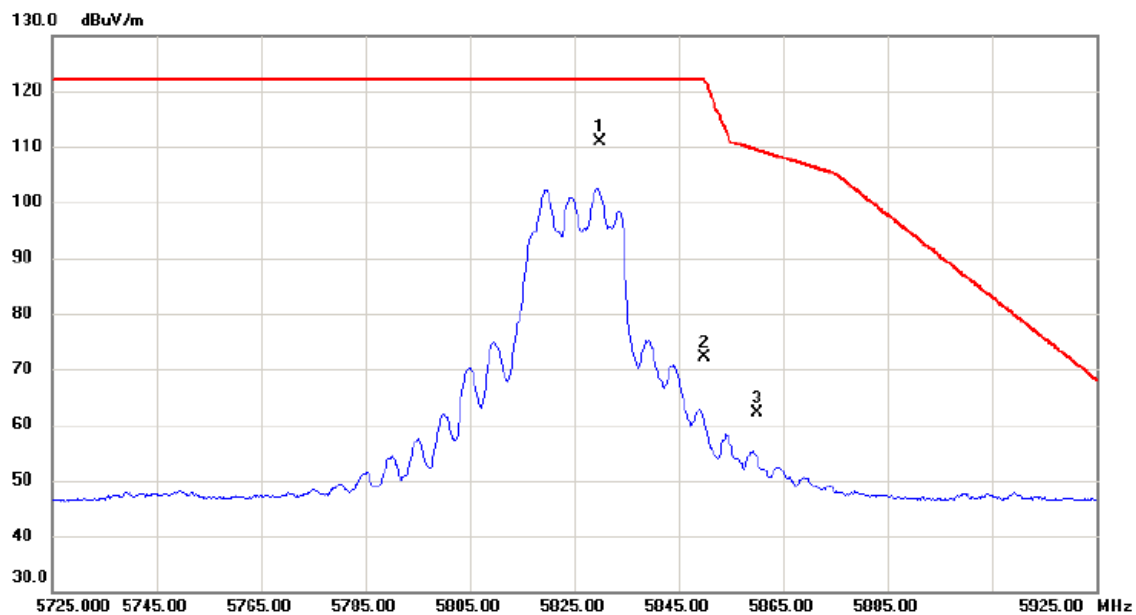

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5829.800	110.84	-0.04	110.80	122.20	-11.40	peak	主波訊號不予判定
2		5850.000	72.11	0.00	72.11	122.20	-50.09	peak	
3		5860.000	61.98	0.03	62.01	109.40	-47.39	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/05

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

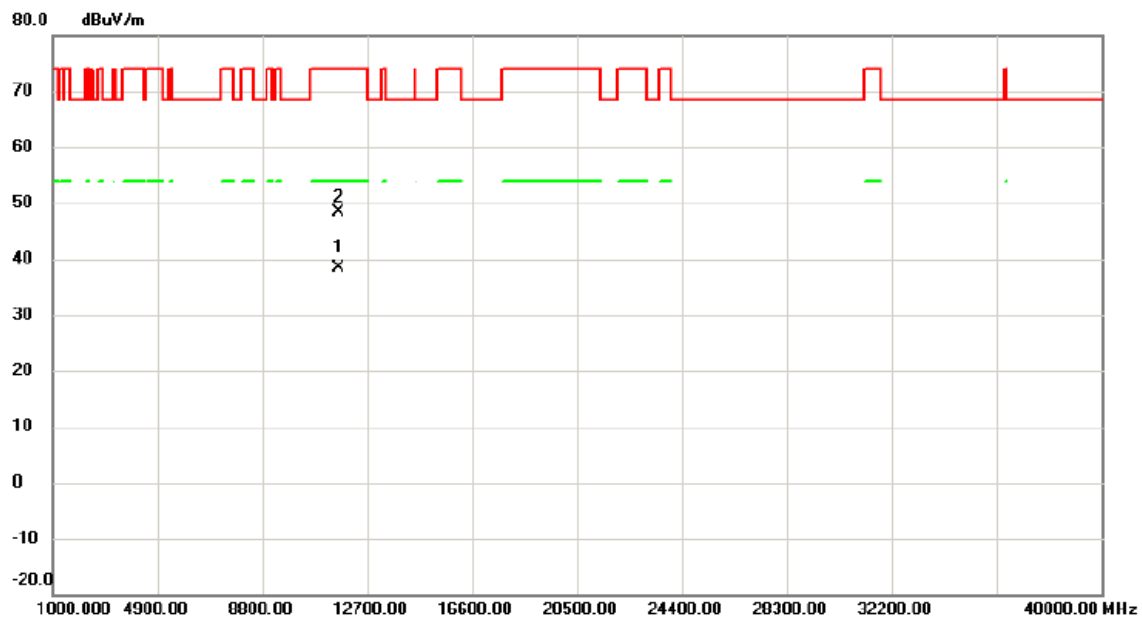

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11648.65	35.95	2.50	38.45	54.00	-15.55	AVG	
2		11654.40	45.91	2.48	48.39	74.00	-25.61	peak	

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

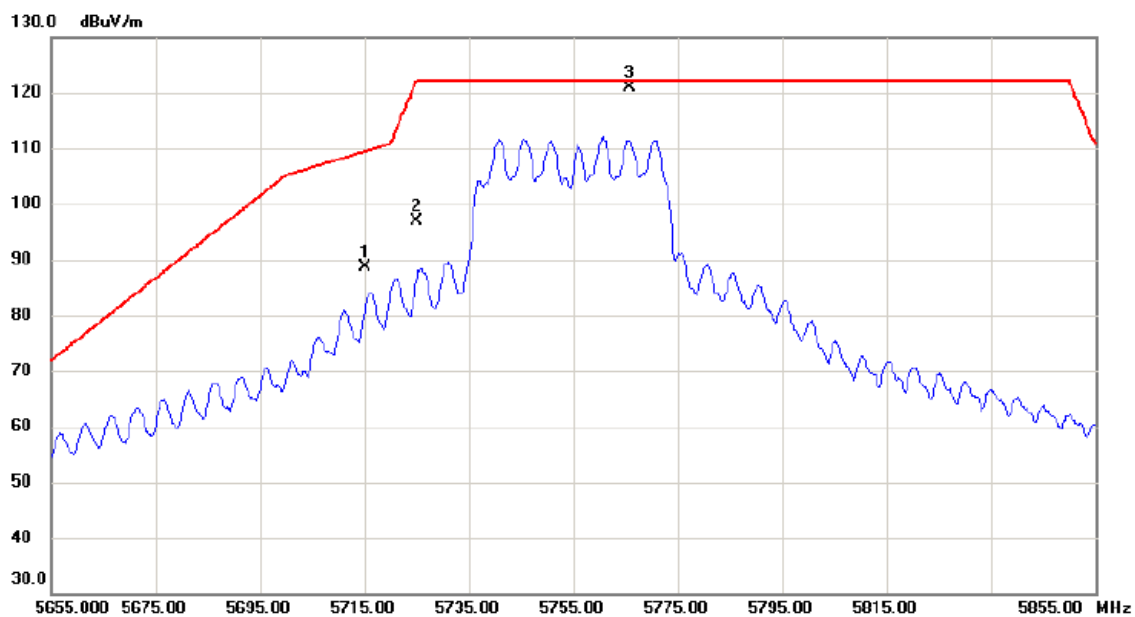

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	88.93	-0.35	88.58	109.40	-20.82	peak	
2		5725.000	97.16	-0.31	96.85	122.20	-25.35	peak	
3	*	5765.700	121.17	-0.20	120.97	122.20	-1.23	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

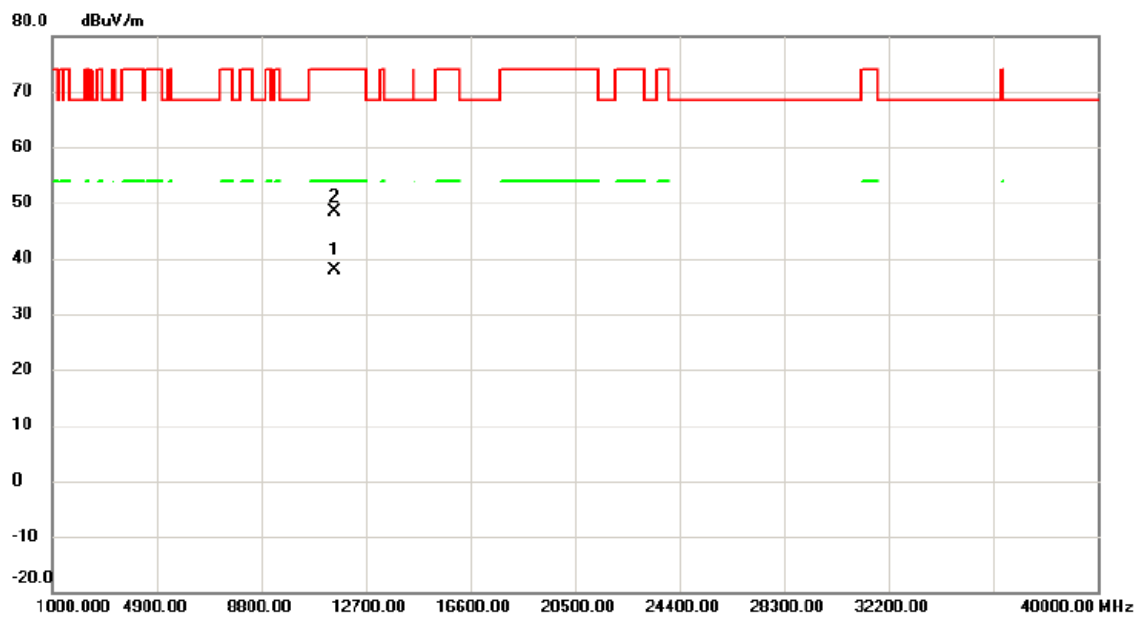

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11512.90	34.95	2.88	37.83	54.00	-16.17	AVG	
2		11518.15	45.60	2.86	48.46	74.00	-25.54	peak	

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

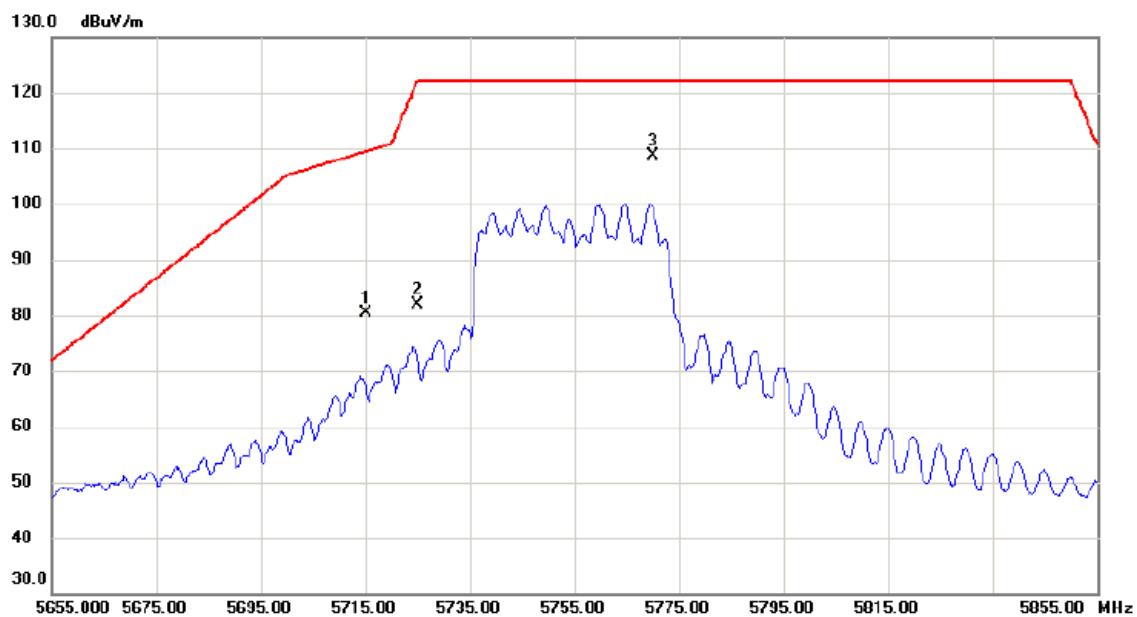

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	80.81	-0.35	80.46	109.40	-28.94	peak	
2		5725.000	82.31	-0.31	82.00	122.20	-40.20	peak	
3	*	5770.100	108.84	-0.20	108.64	122.20	-13.56	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

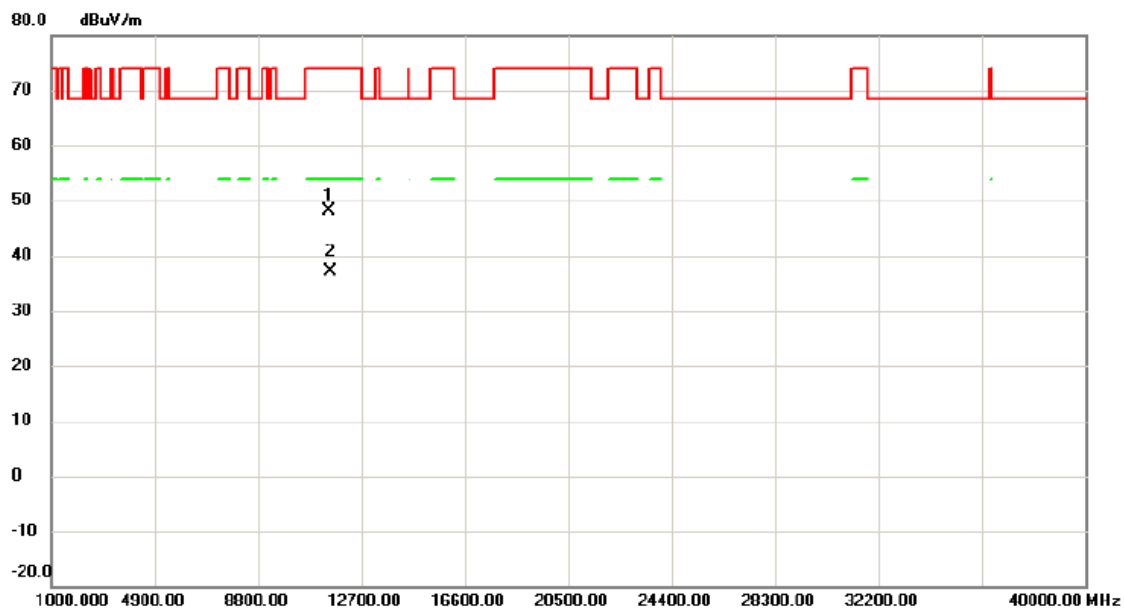

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11501.70	45.24	2.91	48.15	74.00	-25.85	peak	
2	*	11513.65	34.31	2.88	37.19	54.00	-16.81	AVG	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

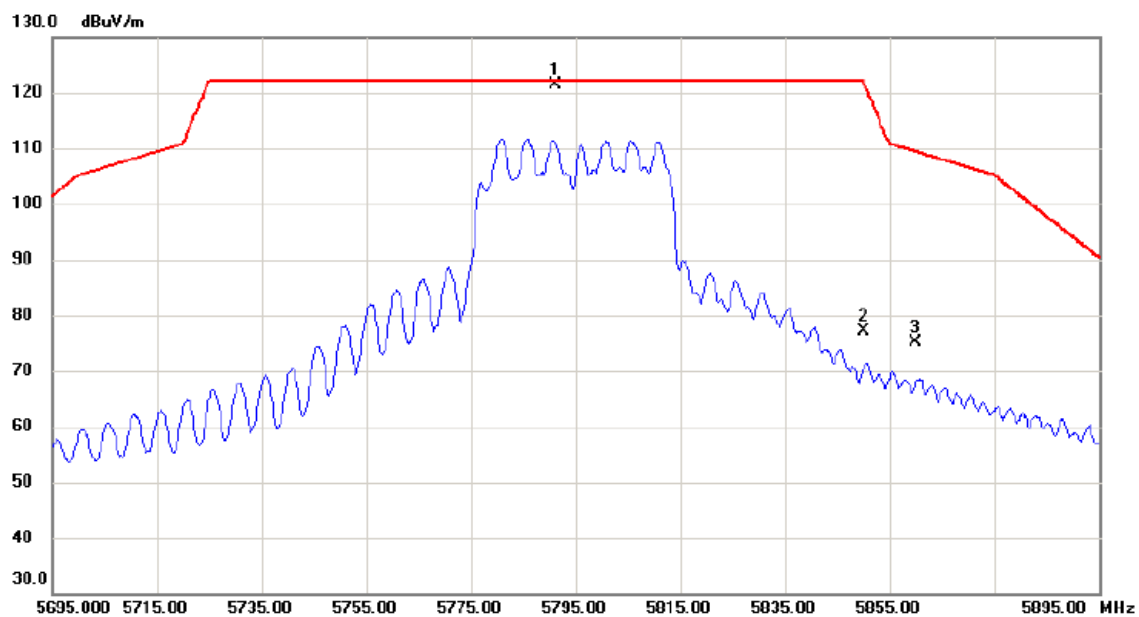


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5791.000	121.49	-0.14	121.35	122.20	-0.85	peak	主波訊號不予判定
2		5850.000	77.12	0.00	77.12	122.20	-45.08	peak	
3		5860.000	75.15	0.03	75.18	109.40	-34.22	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

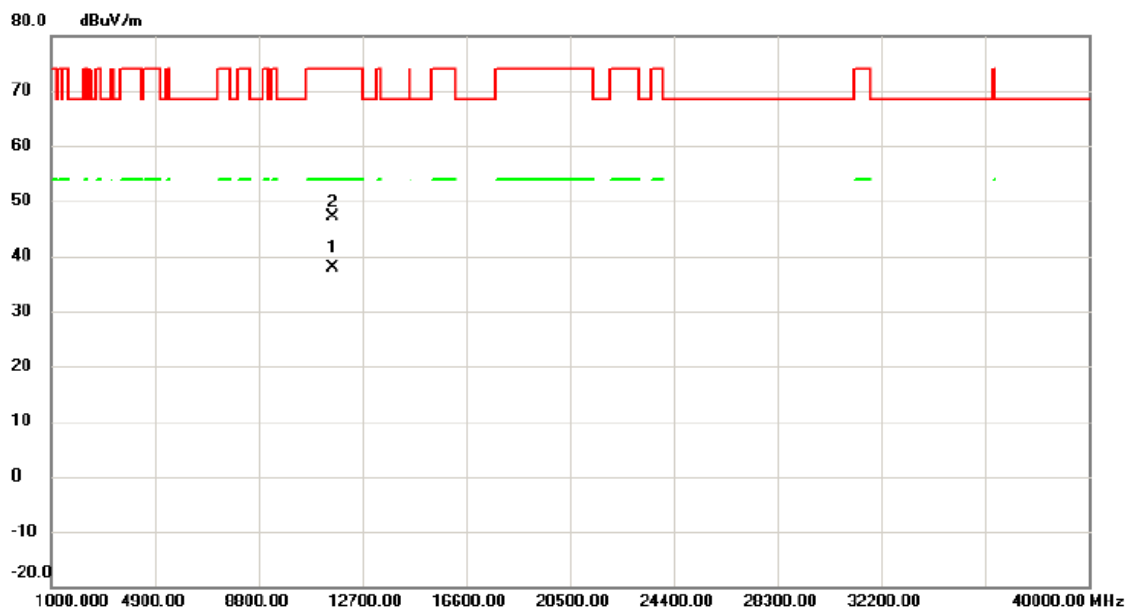

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11583.00	35.22	2.68	37.90	54.00	-16.10	AVG	
2		11584.00	44.43	2.69	47.12	74.00	-26.88	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

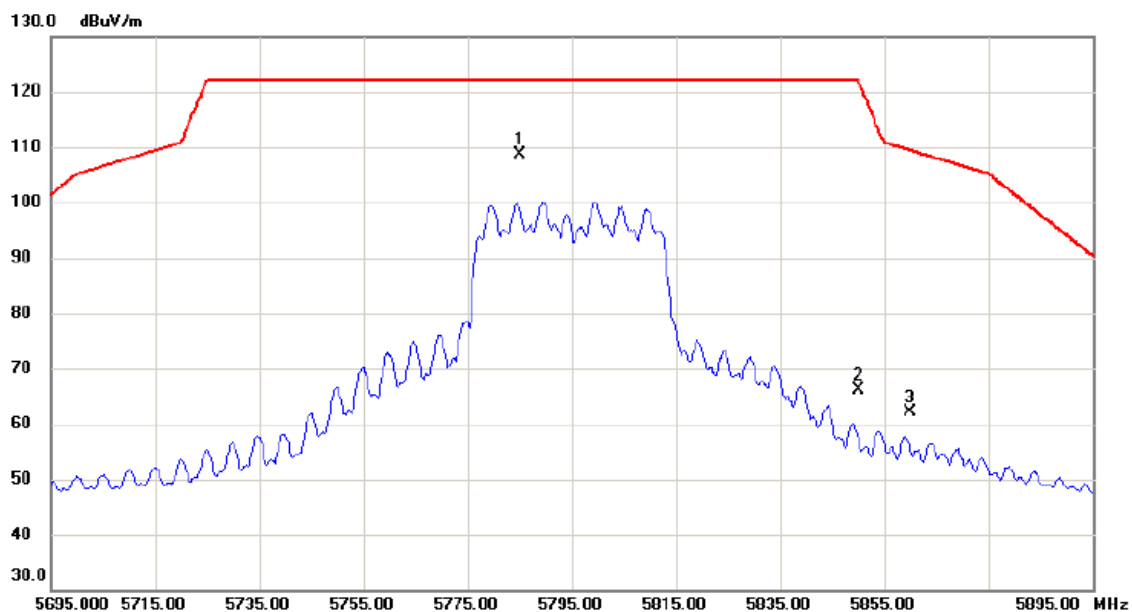


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5784.900	108.71	-0.15	108.56	122.20	-13.64	peak	主波訊號不予判定
2		5850.000	66.13	0.00	66.13	122.20	-56.07	peak	
3		5860.000	62.12	0.03	62.15	109.40	-47.25	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

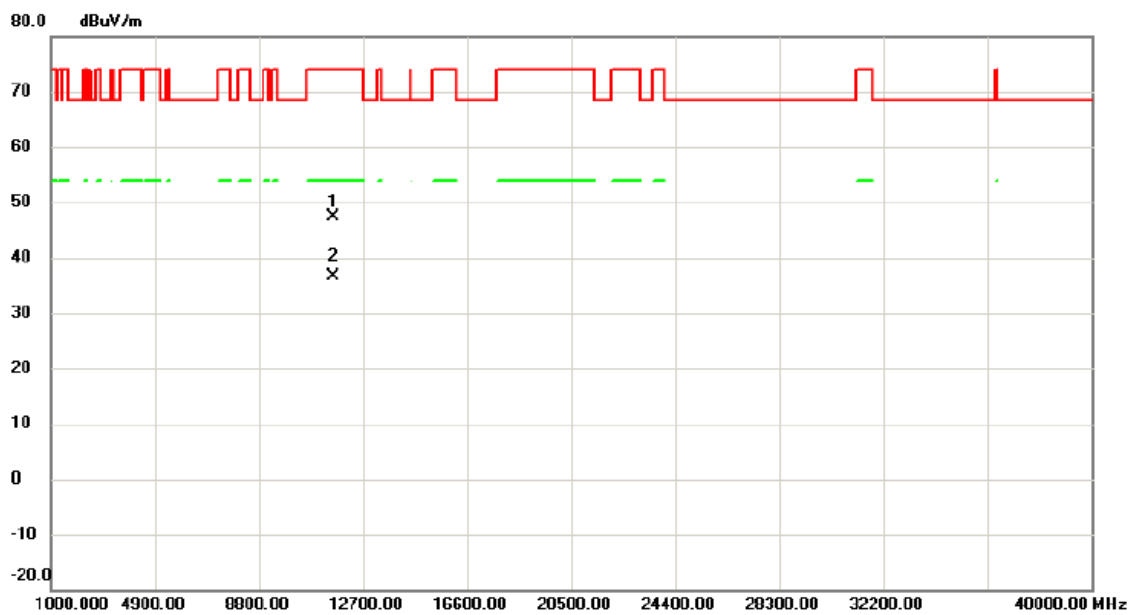

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11571.75	44.61	2.71	47.32	74.00	-26.68	peak	
2	*	11574.05	33.99	2.71	36.70	54.00	-17.30	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/28

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

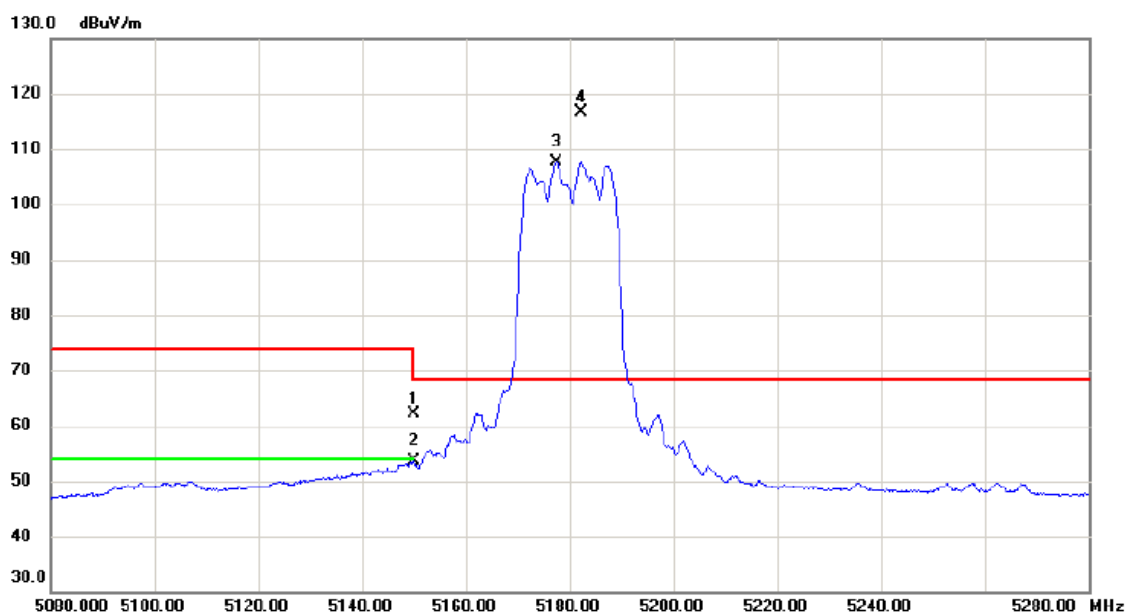


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	63.41	-1.17	62.24	74.00	-11.76	peak	
2		5150.000	54.73	-1.17	53.56	54.00	-0.44	AVG	
3	X	5177.400	108.74	-1.14	107.60	68.30	39.30	AVG	主波訊號不予判定
4	*	5182.400	117.73	-1.15	116.58	68.30	48.28	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
 5180 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/05
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

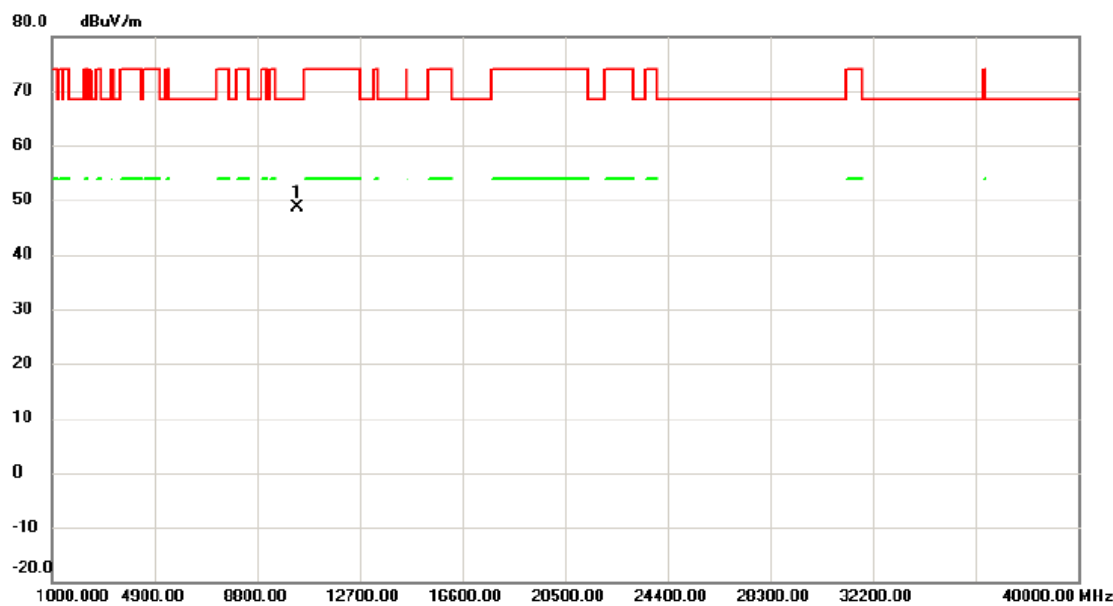


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10356.20	47.11	1.57	48.68	68.30	-19.62	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

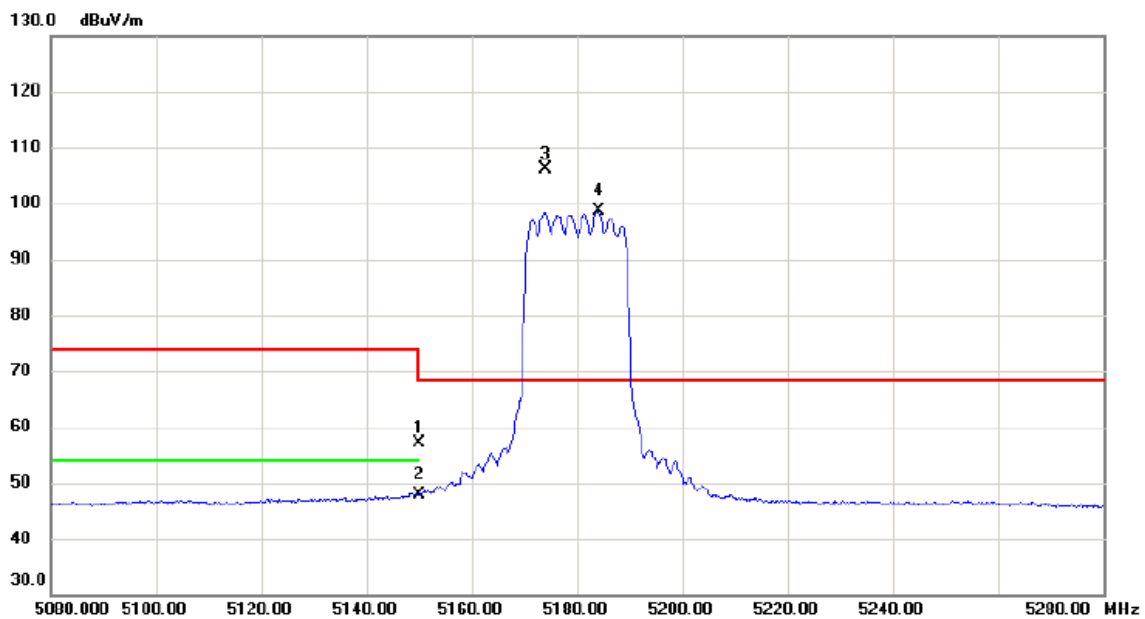

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	58.27	-1.17	57.10	74.00	-16.90	peak	
2		5150.000	48.97	-1.17	47.80	54.00	-6.20	AVG	
3	*	5174.000	107.39	-1.16	106.23	68.30	37.93	peak	主波訊號不予判定
4	X	5184.000	99.84	-1.15	98.69	68.30	30.39	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

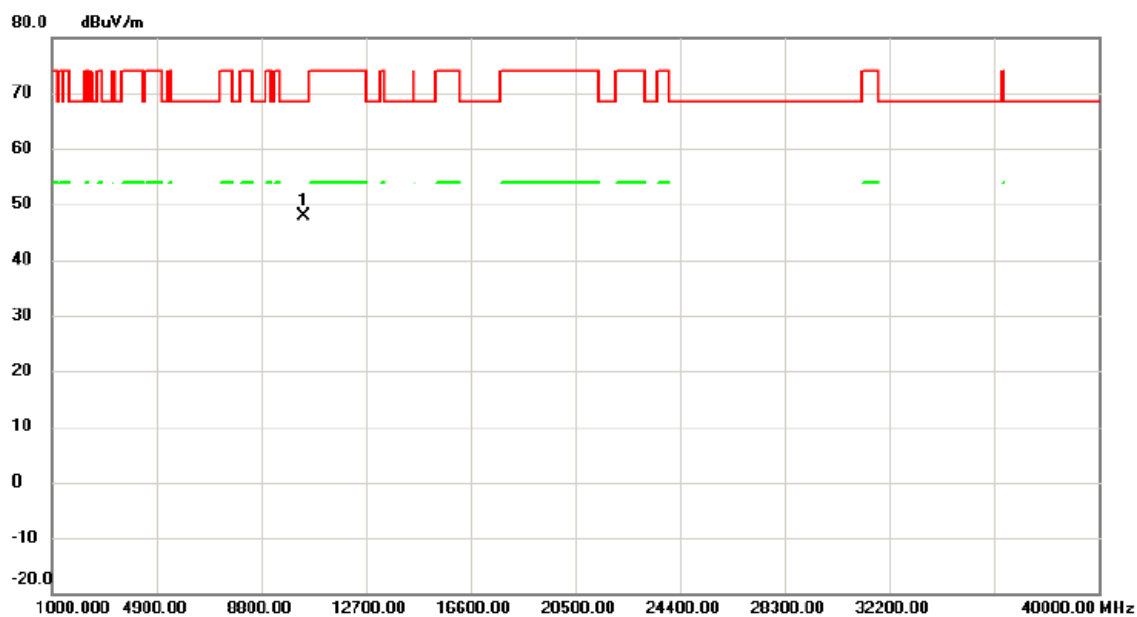


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10381.05	46.29	1.59	47.88	68.30	-20.42	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AVG
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

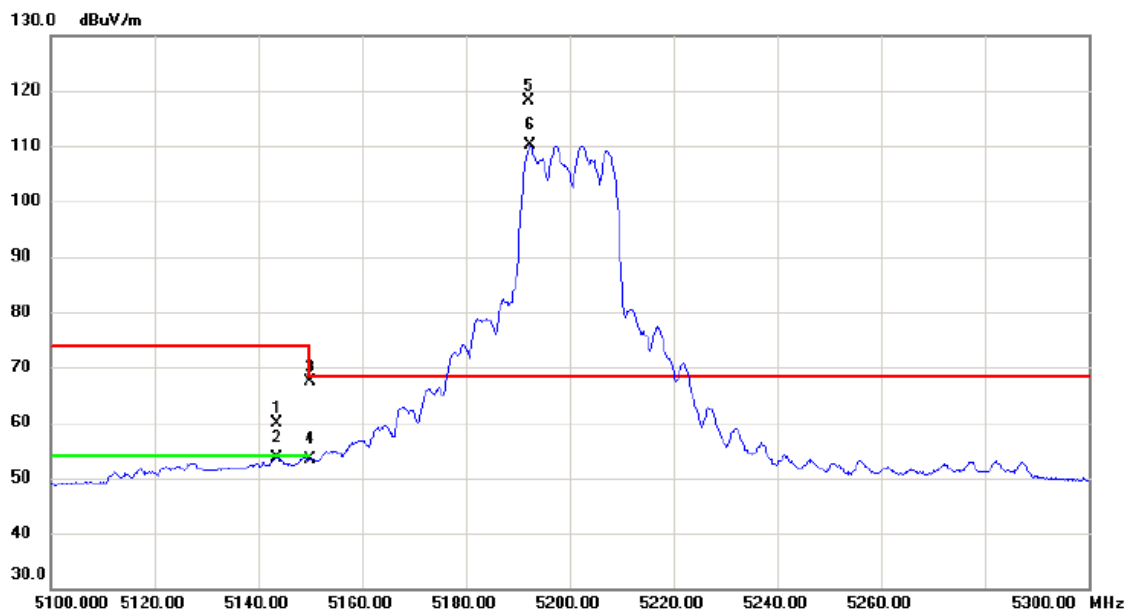

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5143.500	60.98	-1.17	59.81	74.00	-14.19	peak	
2		5143.500	54.77	-1.17	53.60	54.00	-0.40	AVG	
3		5150.000	68.60	-1.17	67.43	74.00	-6.57	peak	
4		5150.000	54.58	-1.17	53.41	54.00	-0.59	AVG	
5	*	5192.200	119.36	-1.13	118.23	68.30	49.93	peak	主波訊號不予判定
6	X	5192.400	111.23	-1.13	110.10	68.30	41.80	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

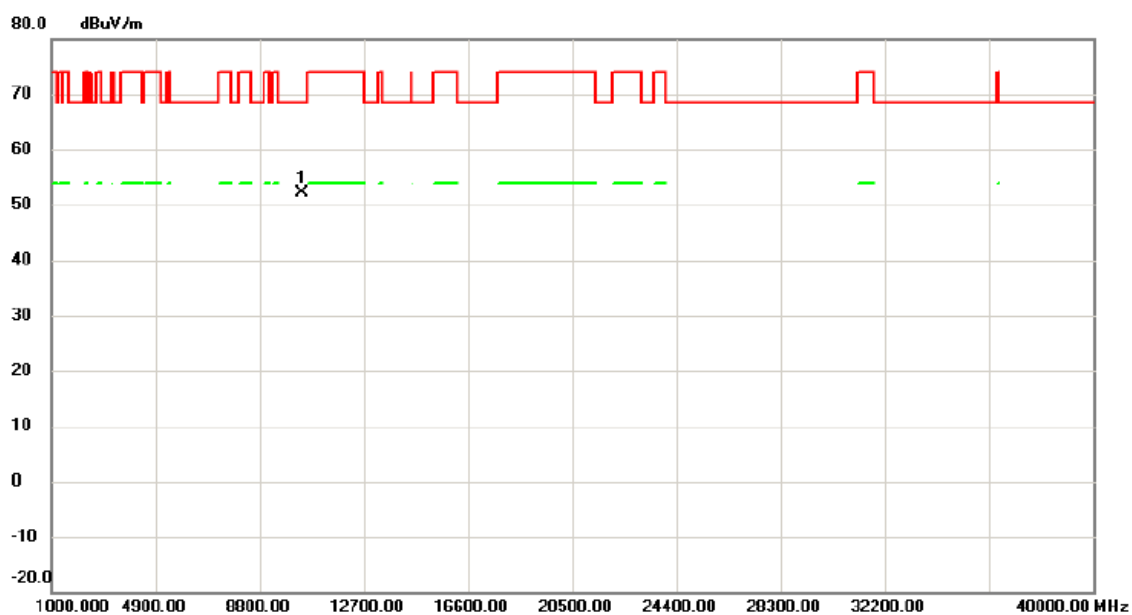


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10401.10	50.47	1.62	52.09	68.30	-16.21	peak	

測試頻道: IEEE 802.11ac (VHT20) /
 5200 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

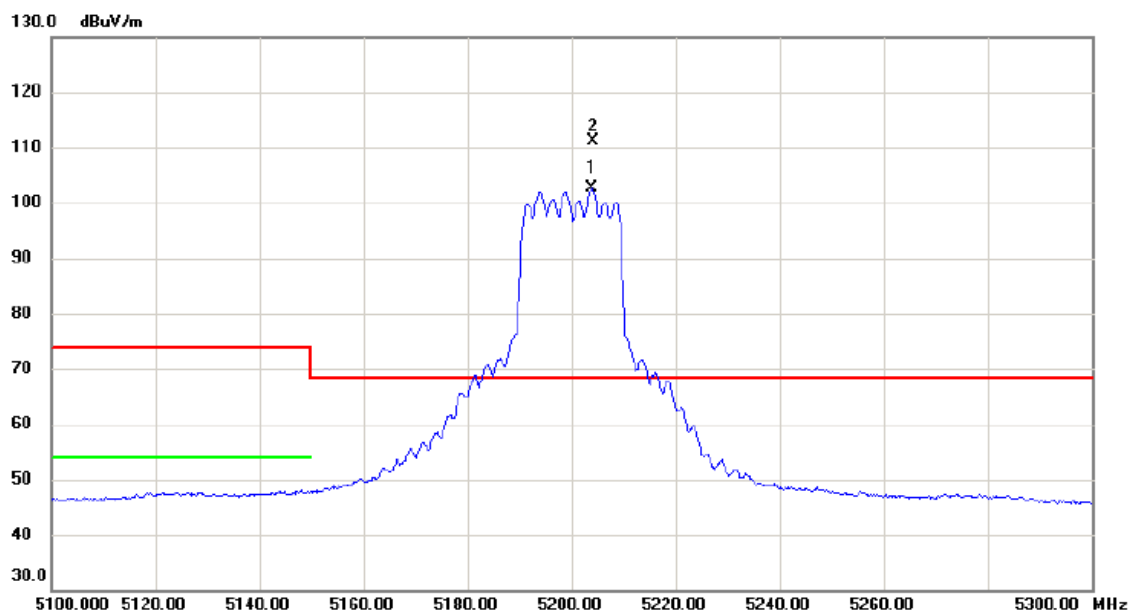

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5203.900	103.77	-1.13	102.64	68.30	34.34	AVG	主波訊號不予判定
2	*	5204.100	112.36	-1.13	111.23	68.30	42.93	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

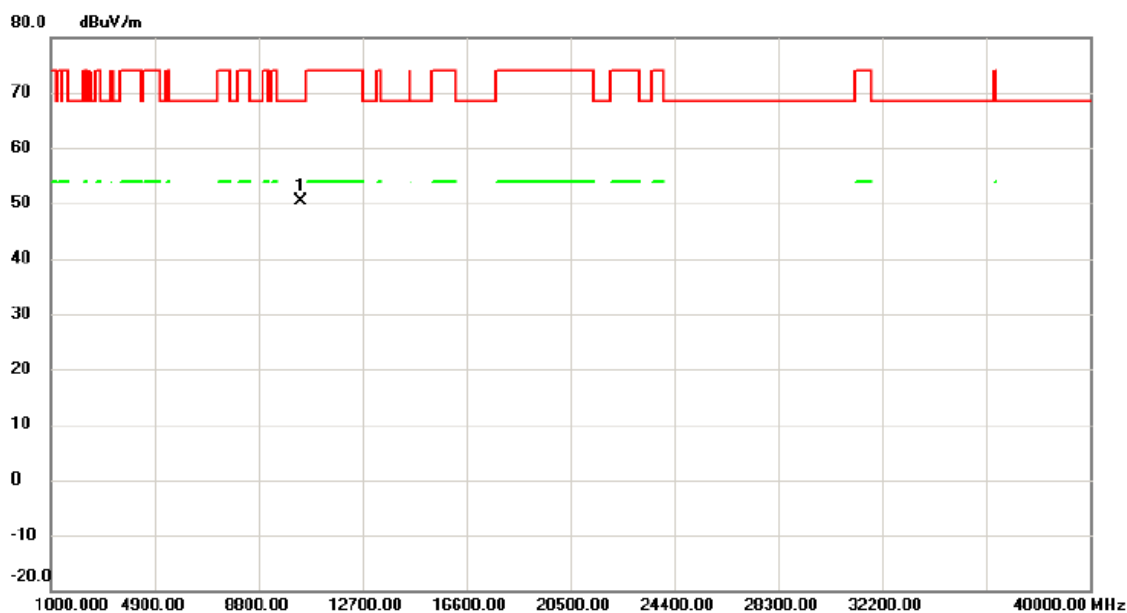

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10399.20	48.83	1.62	50.45	68.30	-17.85	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

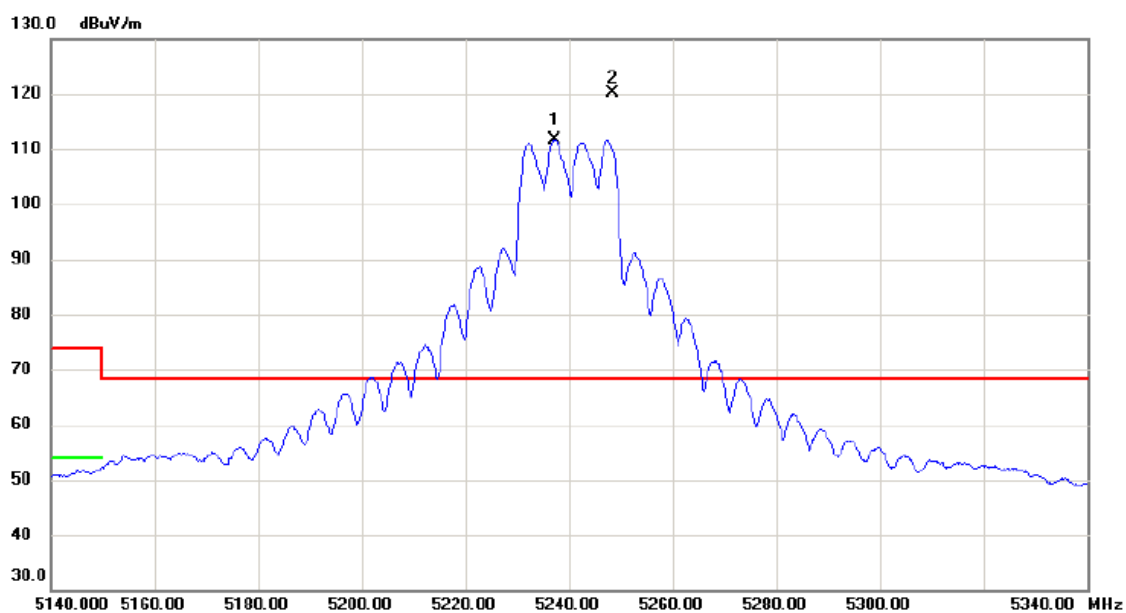


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5237.300	112.82	-1.11	111.71	68.30	43.41	AVG	主波訊號不予判定
2	*	5248.300	121.26	-1.09	120.17	68.30	51.87	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

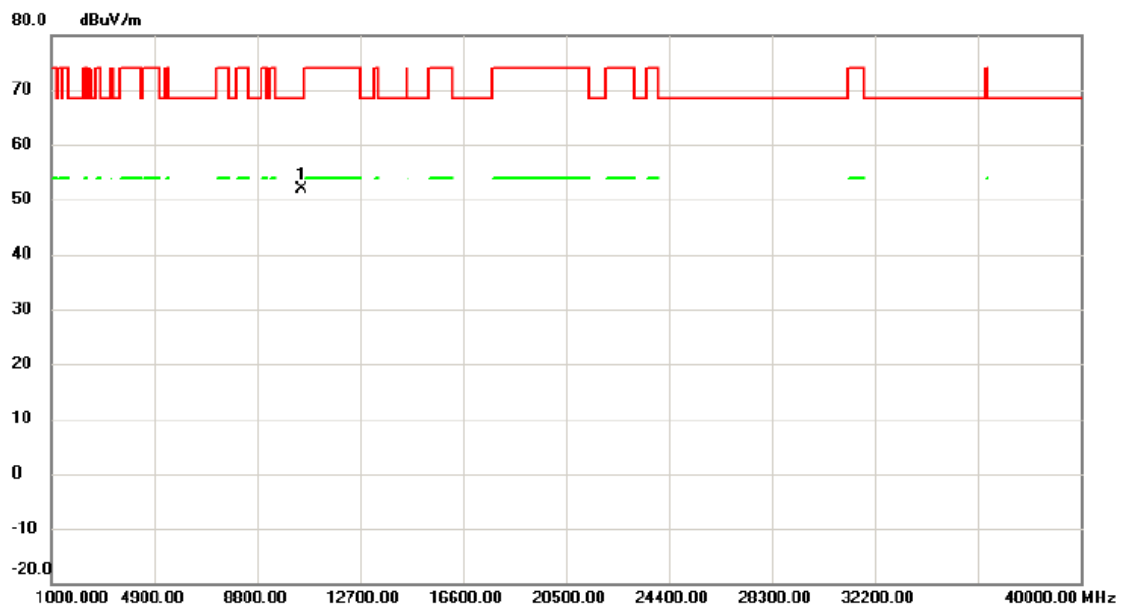


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.40	50.12	1.69	51.81	68.30	-16.49	peak	

測試頻道: IEEE 802.11ac (VHT20) /
 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

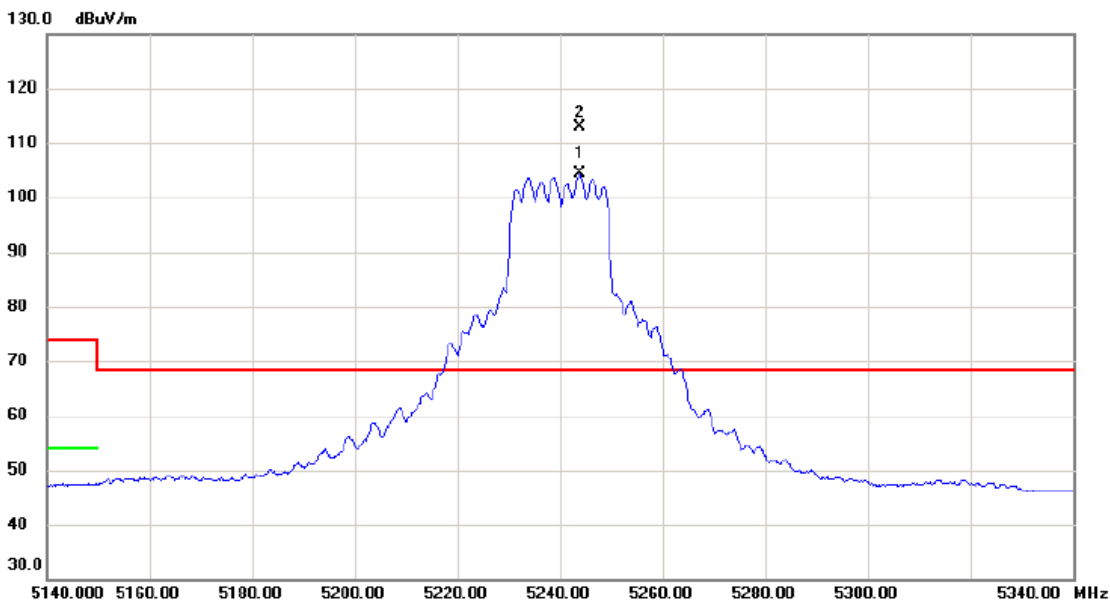

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5243.800	105.43	-1.09	104.34	68.30	36.04	AVG	主波訊號不予判定
2	*	5243.900	114.00	-1.09	112.91	68.30	44.61	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

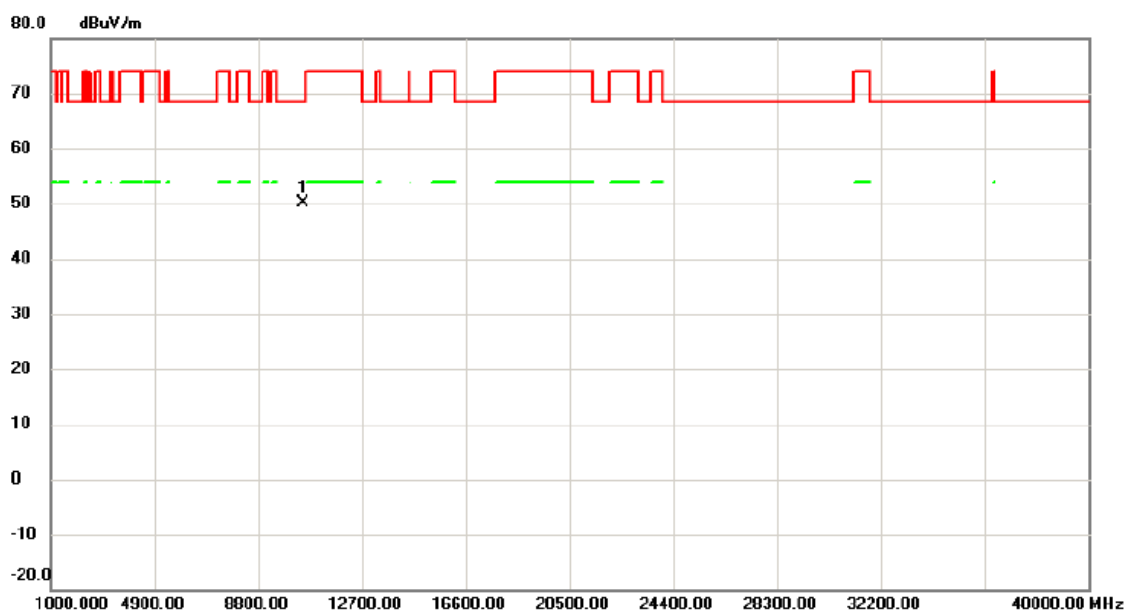


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10485.40	48.50	1.71	50.21	68.30	-18.09	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

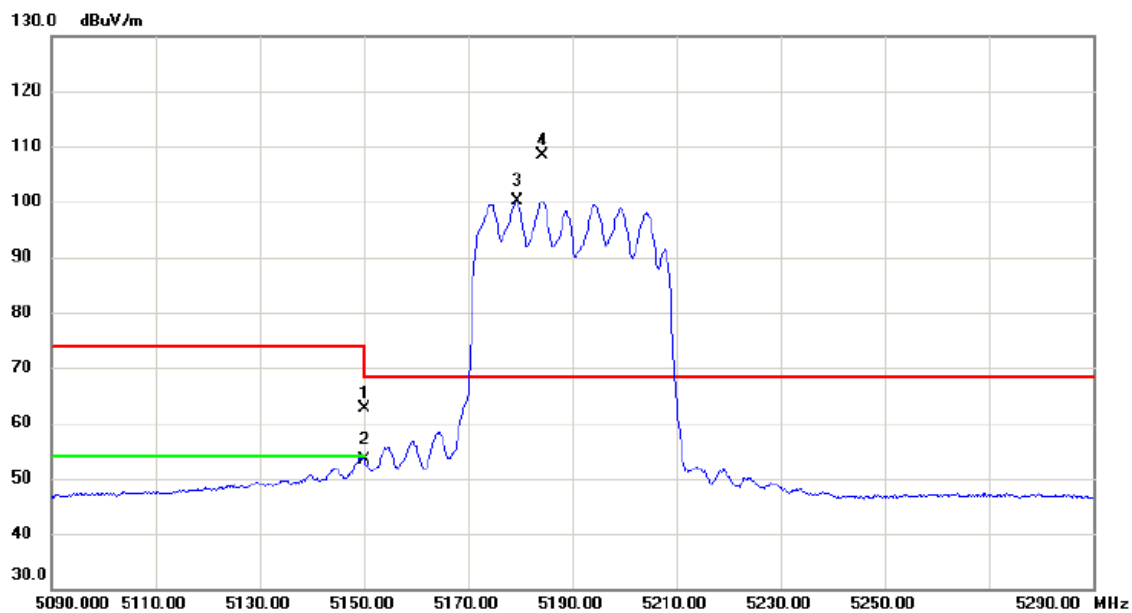


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	63.79	-1.17	62.62	74.00	-11.38	peak	
2		5150.000	54.62	-1.17	53.45	54.00	-0.55	AVG	
3	X	5179.500	101.16	-1.14	100.02	68.30	31.72	AVG	主波訊號不予判定
4	*	5184.200	109.42	-1.15	108.27	68.30	39.97	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

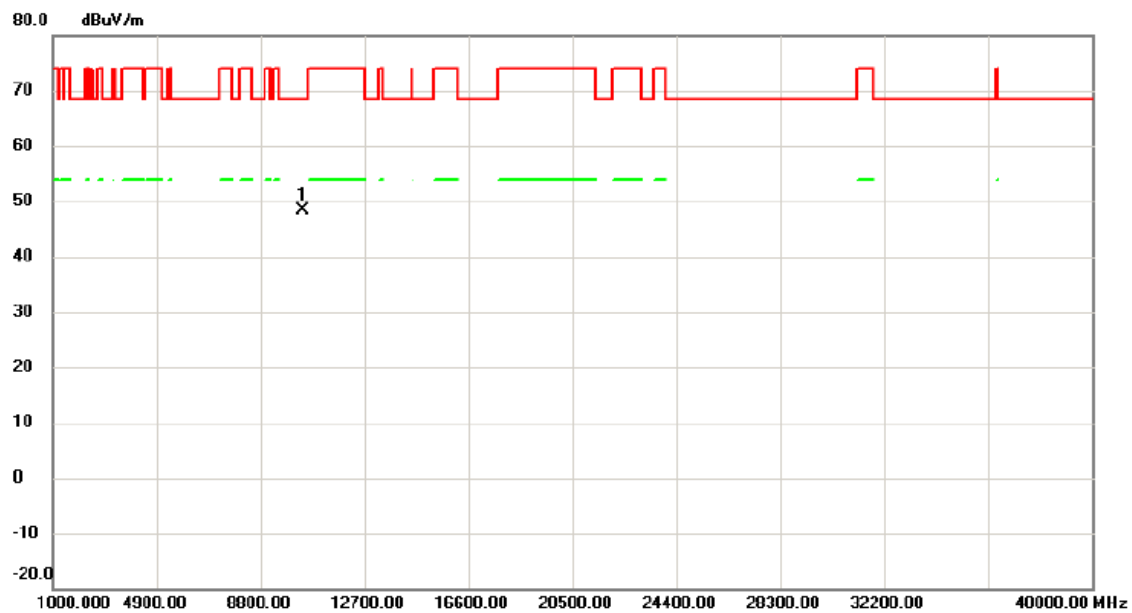


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10385.70	46.85	1.61	48.46	68.30	-19.84	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

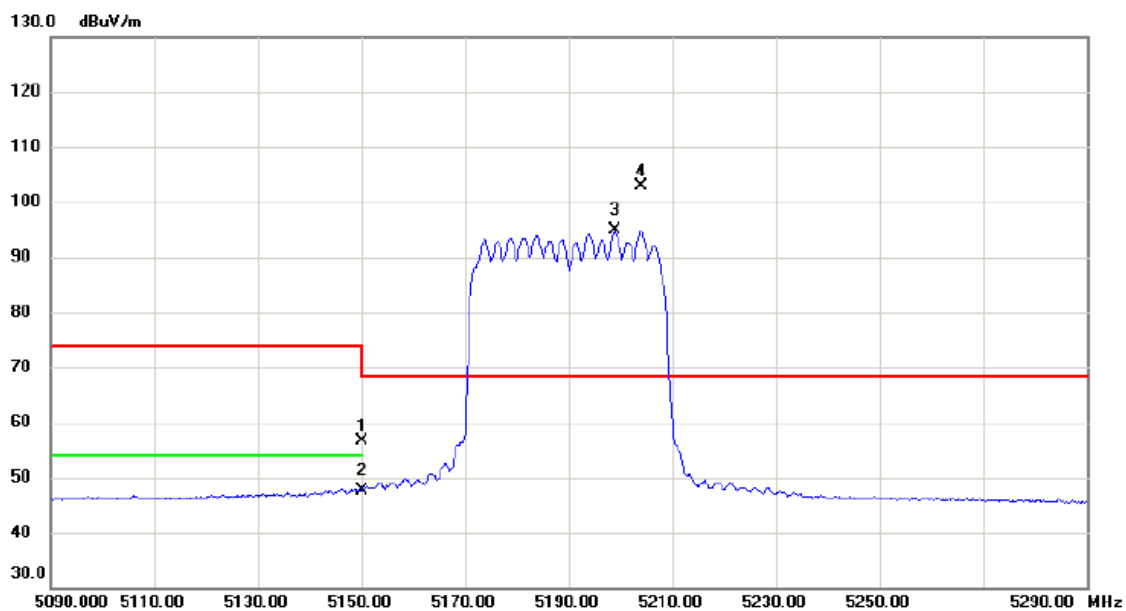


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	57.82	-1.17	56.65	74.00	-17.35	peak	
2		5150.000	48.90	-1.17	47.73	54.00	-6.27	AVG	
3	X	5198.900	95.91	-1.13	94.78	68.30	26.48	AVG	主波訊號不予判定
4	*	5204.100	103.90	-1.13	102.77	68.30	34.47	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

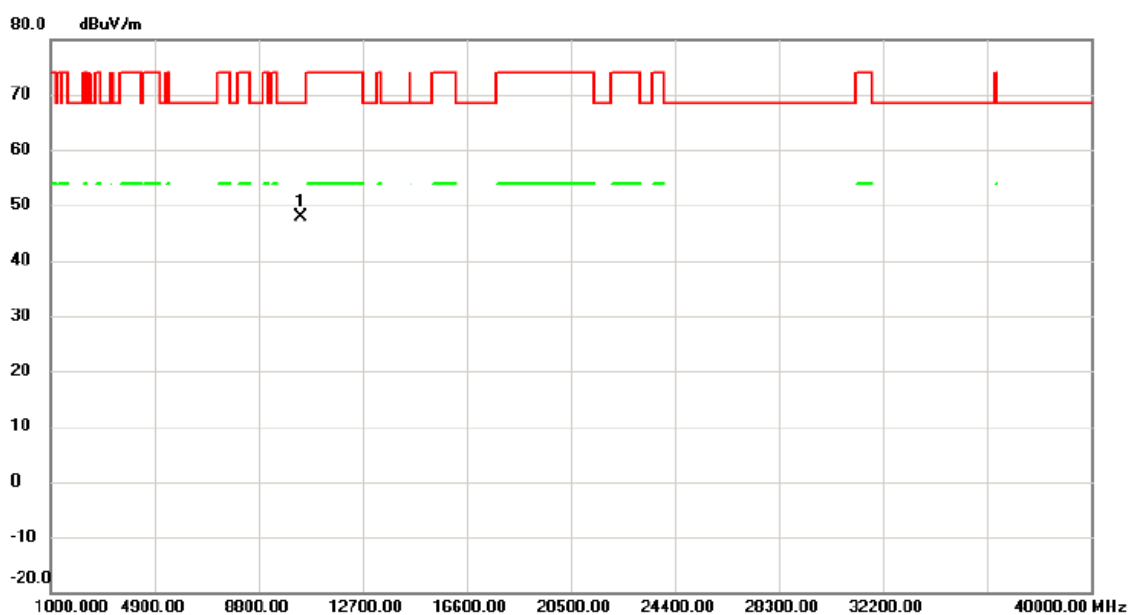

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10367.40	46.35	1.58	47.93	68.30	-20.37	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/28

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

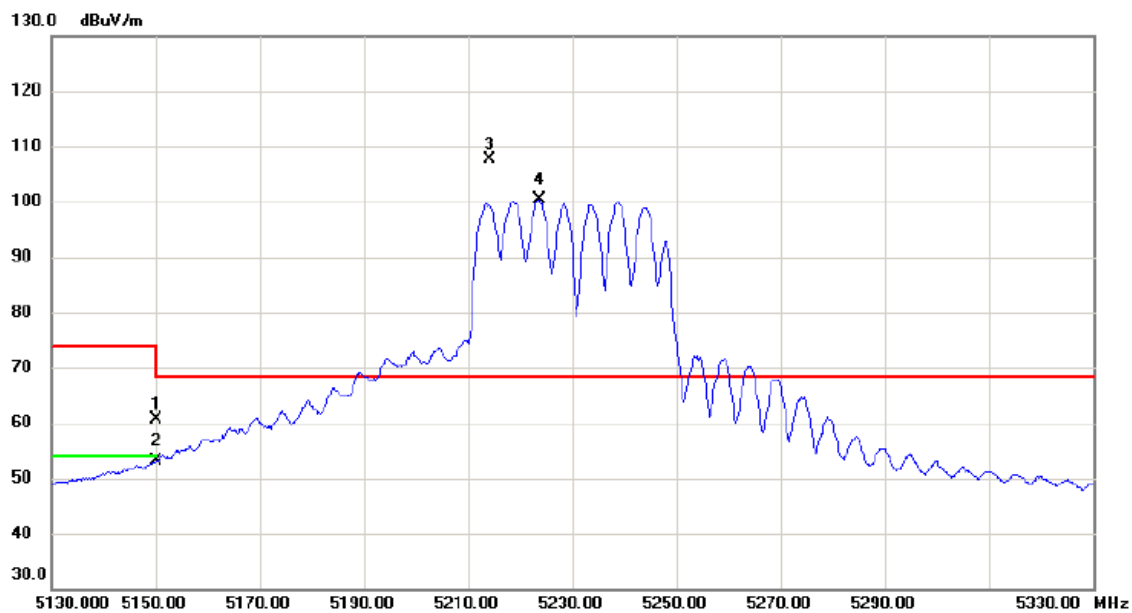

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	61.74	-1.17	60.57	74.00	-13.43	peak	
2		5150.000	54.18	-1.17	53.01	54.00	-0.99	AVG	
3	*	5214.100	108.70	-1.12	107.58	68.30	39.28	peak	主波訊號不予判定
4	X	5223.600	101.59	-1.12	100.47	68.30	32.17	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

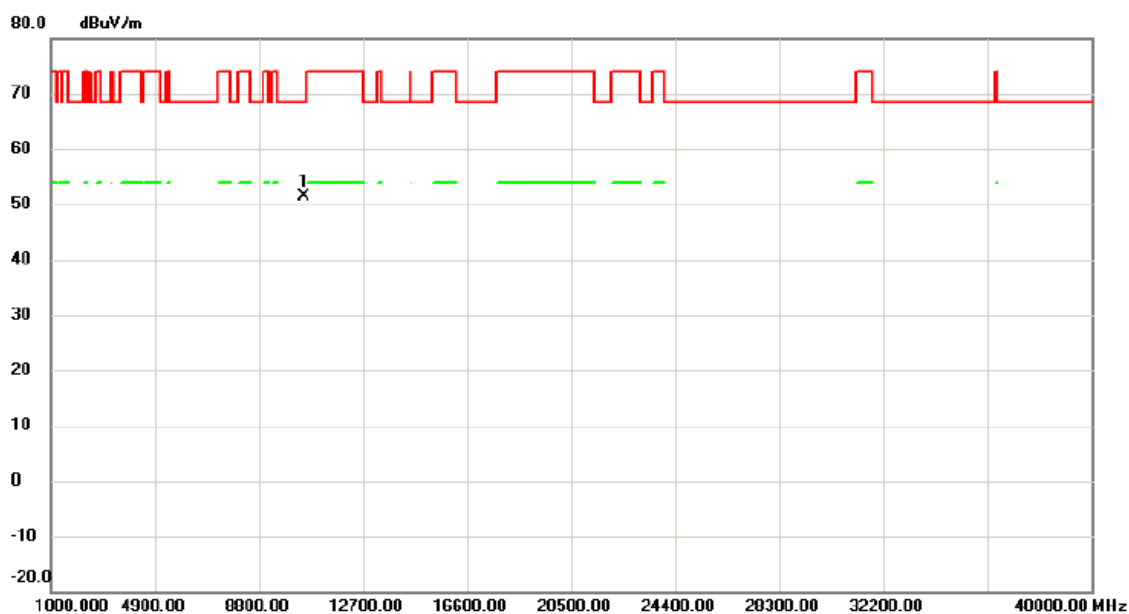


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10473.45	49.60	1.69	51.29	68.30	-17.01	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

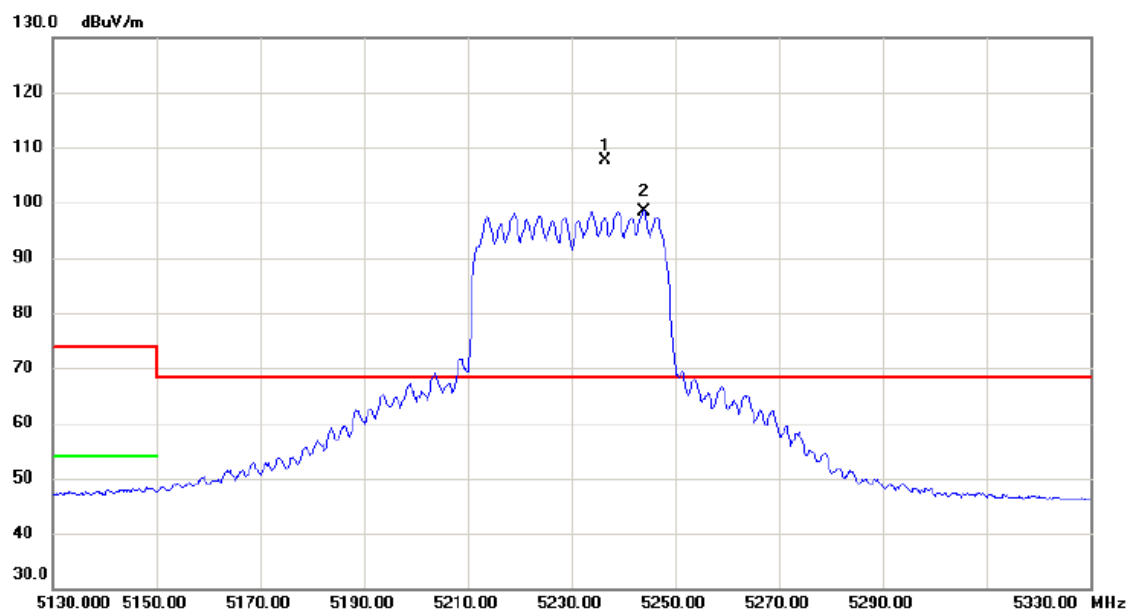


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5236.600	108.79	-1.11	107.68	68.30	39.38	peak	主波訊號不予判定
2	X	5244.100	99.59	-1.09	98.50	68.30	30.20	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
 5230 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/05
 環境濕度: 66%

Orthogonal Axis: X Polarization: Horizontal

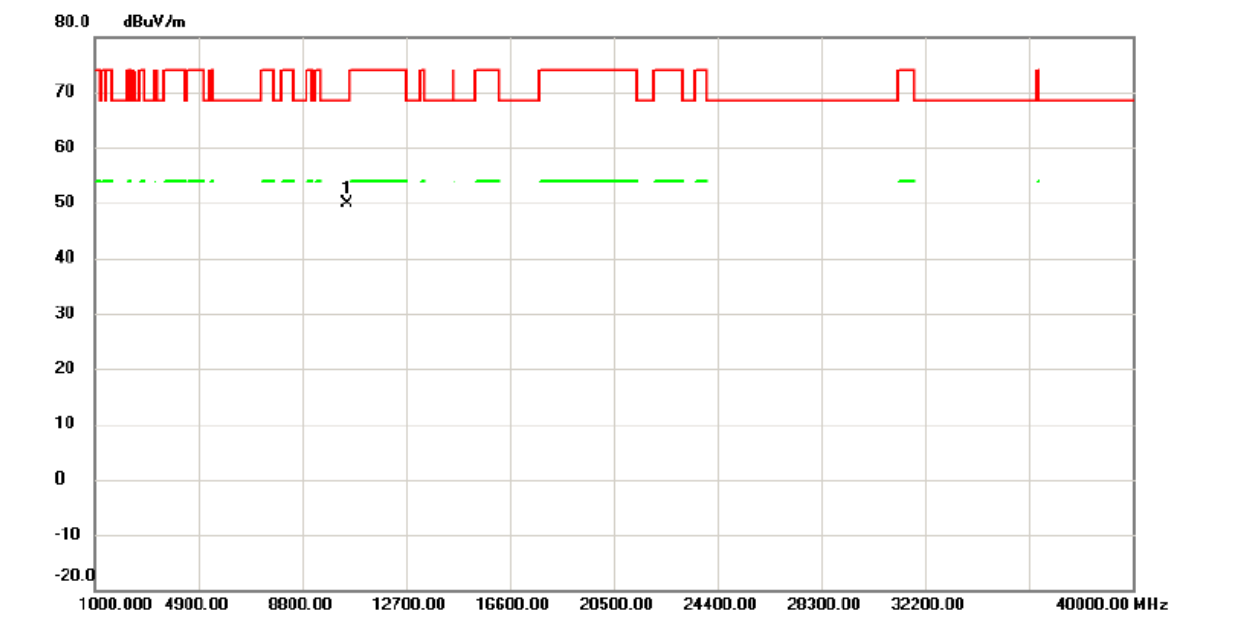


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment	dBuV/m	dBuV/m	dB	Detector
1	*	10469.95	48.22	1.69	49.91	68.30	-18.39		peak

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

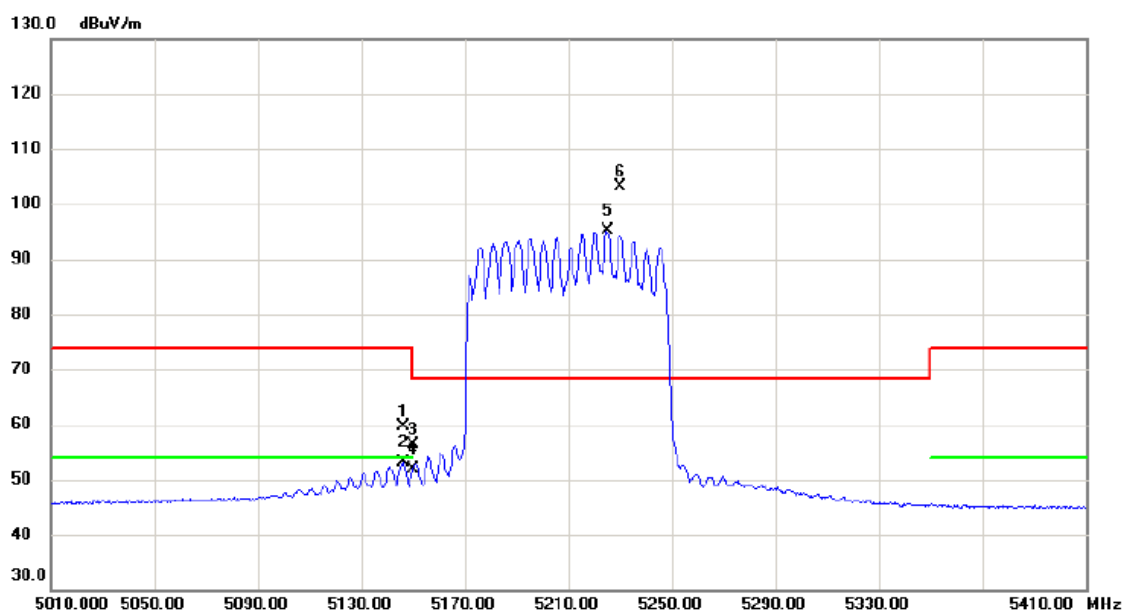


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5146.200	60.90	-1.17	59.73	74.00	-14.27	peak	
2		5146.200	54.28	-1.17	53.11	54.00	-0.89	AVG	
3		5150.000	57.63	-1.17	56.46	74.00	-17.54	peak	
4		5150.000	53.09	-1.17	51.92	54.00	-2.08	AVG	
5	X	5225.000	96.13	-1.10	95.03	68.30	26.73	AVG	主波訊號不予判定
6	*	5230.200	104.32	-1.10	103.22	68.30	34.92	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
 5210 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/05
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

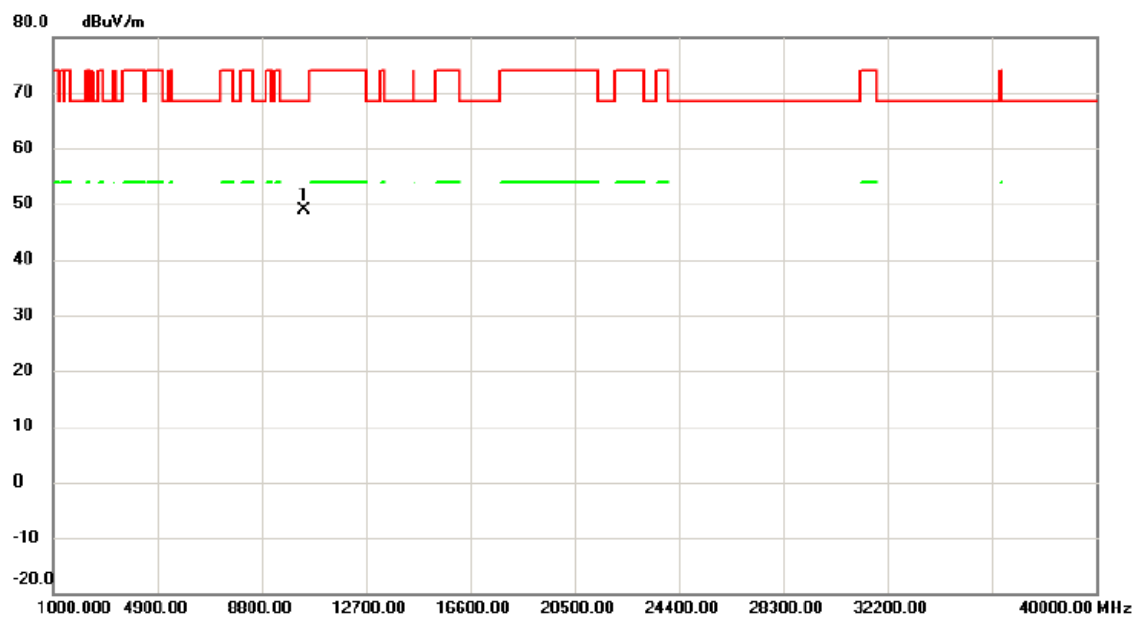

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10408.20	47.17	1.62	48.79	68.30	-19.51	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/28

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

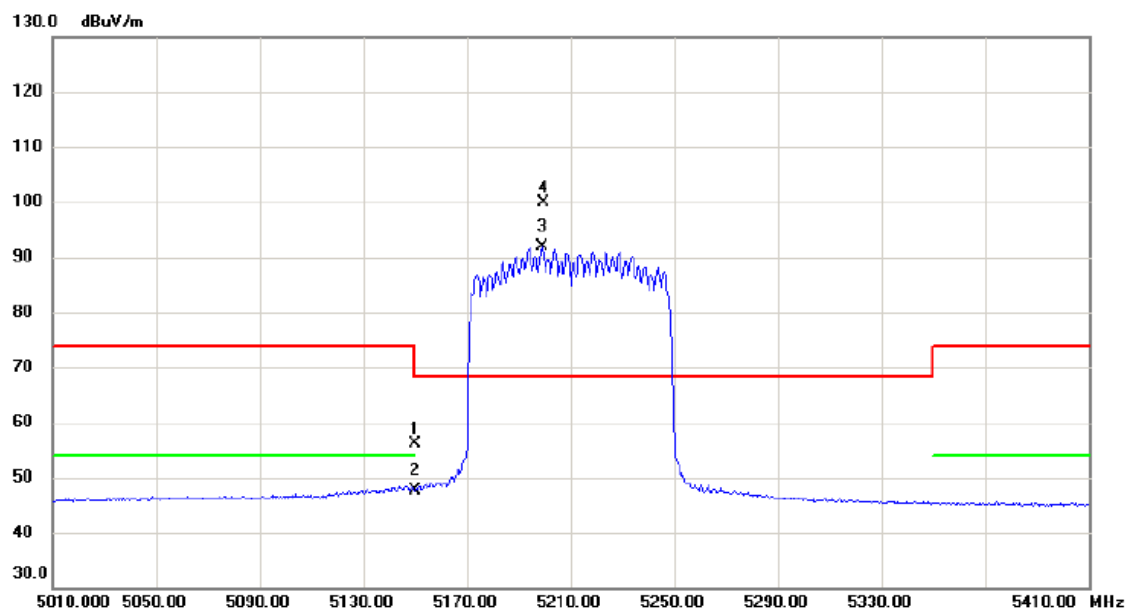


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	57.32	-1.17	56.15	74.00	-17.85	peak	
2		5150.000	48.87	-1.17	47.70	54.00	-6.30	AVG	
3	X	5199.000	92.92	-1.13	91.79	68.30	23.49	AVG	主波訊號不予判定
4	*	5199.400	100.94	-1.13	99.81	68.30	31.51	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

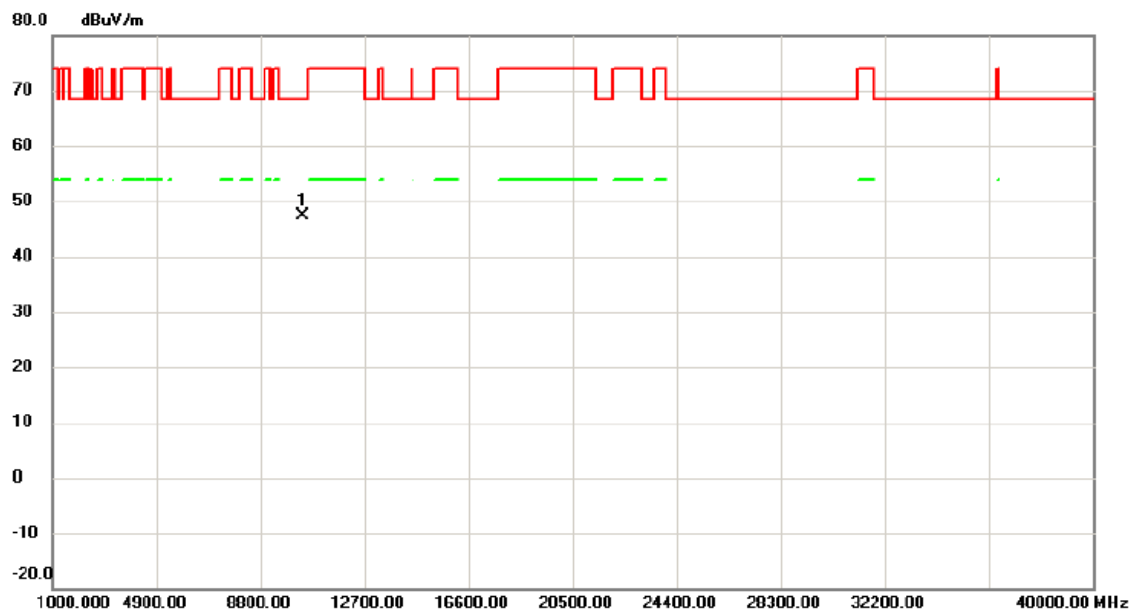

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10395.75	45.83	1.61	47.44	68.30	-20.86	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

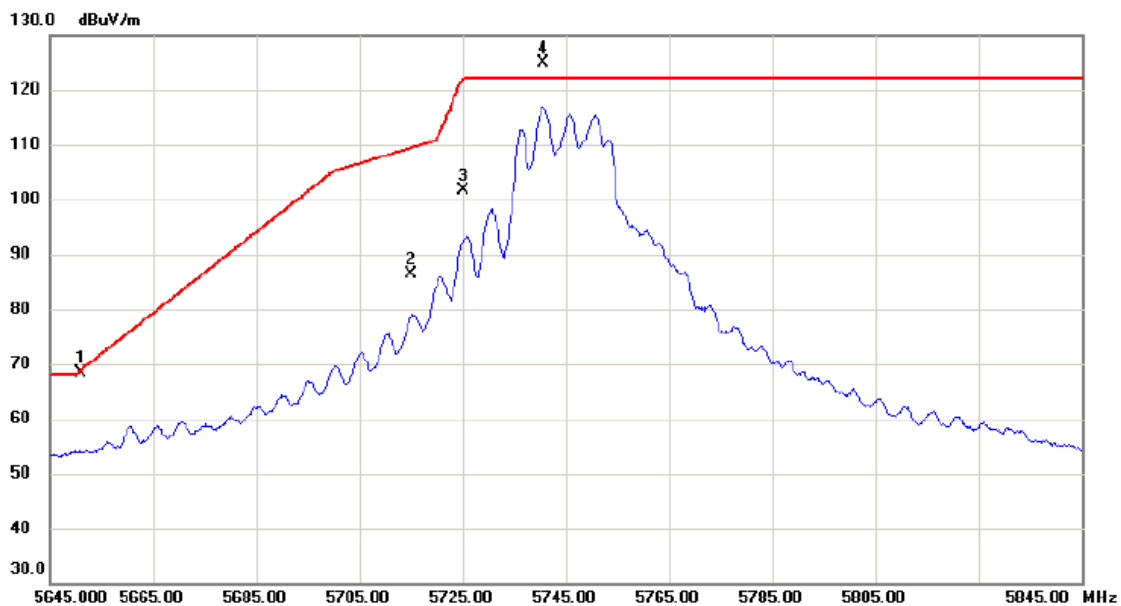


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5651.100	68.95	-0.50	68.45	69.01	-0.56	peak	
2		5715.000	86.83	-0.35	86.48	109.40	-22.92	peak	
3		5725.000	101.89	-0.31	101.58	122.20	-20.62	peak	
4	*	5740.700	125.22	-0.26	124.96	122.20	2.76	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

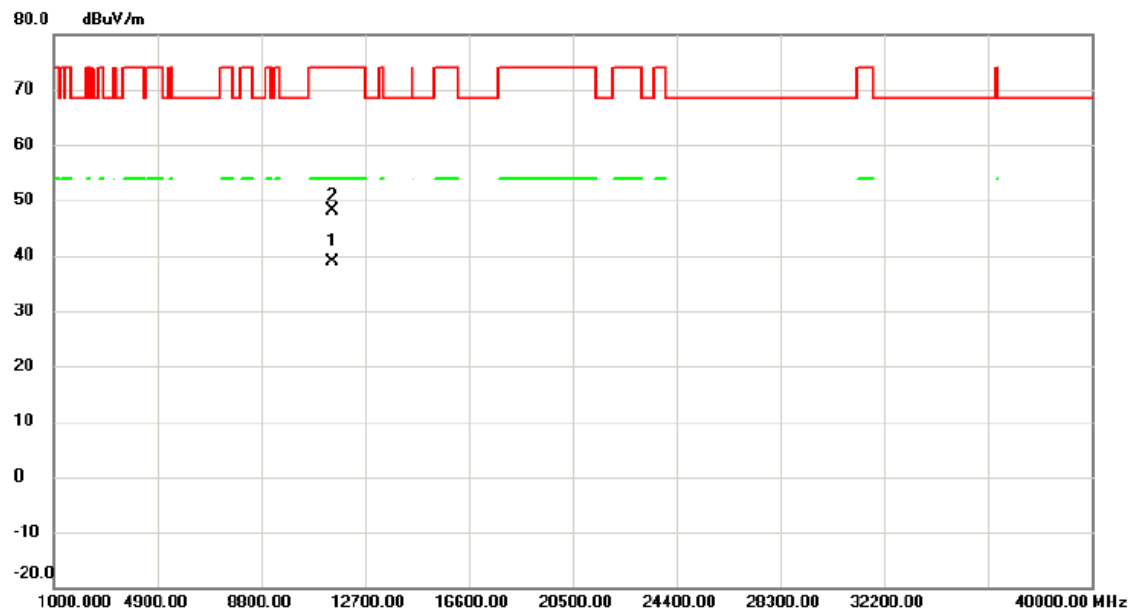


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11488.25	36.11	2.89	39.00	54.00	-15.00	AVG	
2		11492.40	45.24	2.90	48.14	74.00	-25.86	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

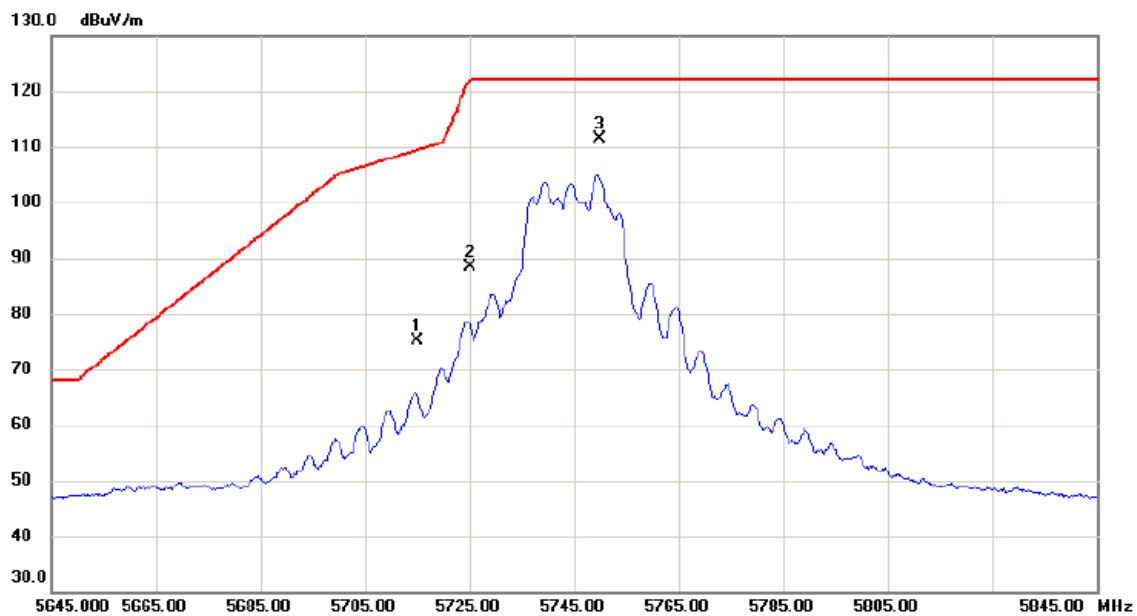

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	75.46	-0.35	75.11	109.40	-34.29	peak	
2		5725.000	88.64	-0.31	88.33	122.20	-33.87	peak	
3	*	5749.800	111.56	-0.25	111.31	122.20	-10.89	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

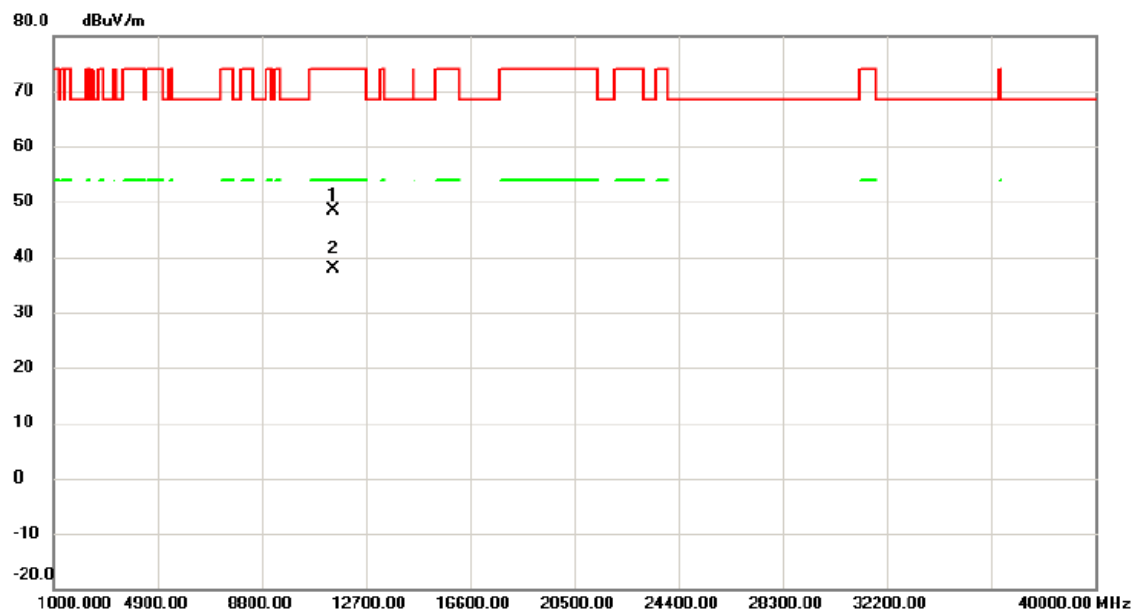

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11483.95	45.39	2.90	48.29	74.00	-25.71	peak	
2	*	11488.85	35.06	2.89	37.95	54.00	-16.05	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

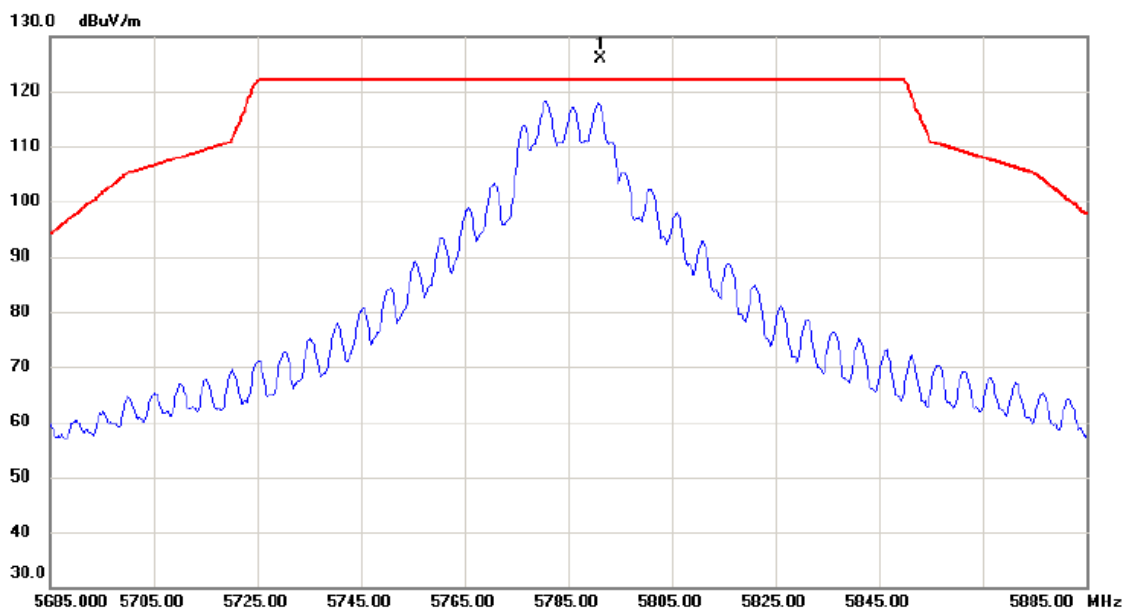


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5791.200	126.01	-0.14	125.87	122.20	3.67	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/05
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

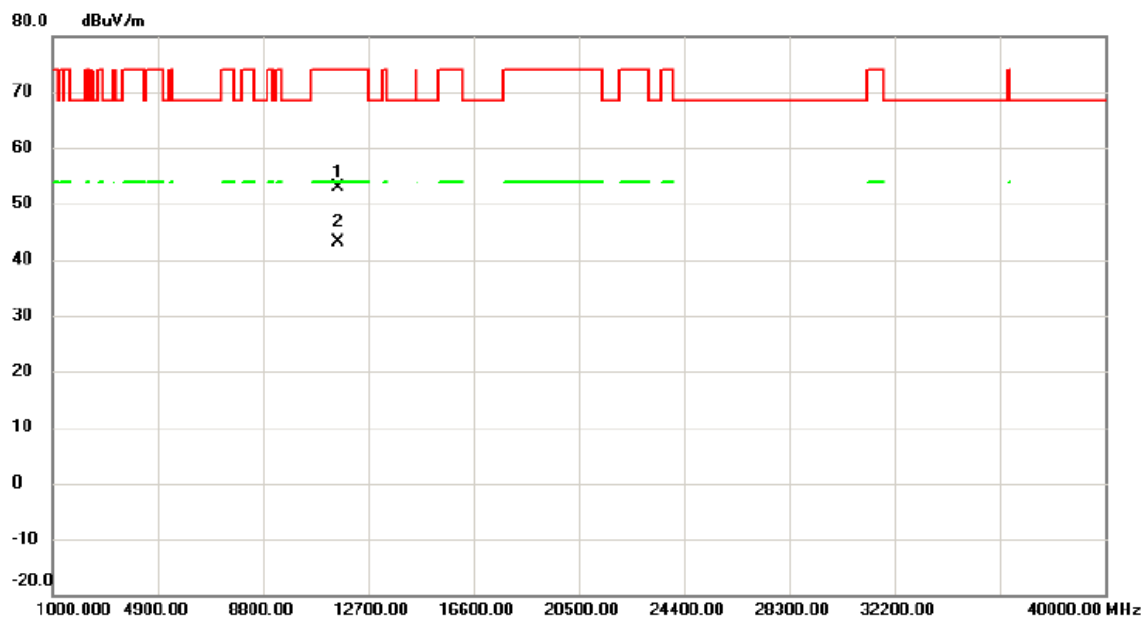


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11568.15	50.11	2.73	52.84	74.00	-21.16	peak	
2	*	11573.05	40.51	2.71	43.22	54.00	-10.78	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

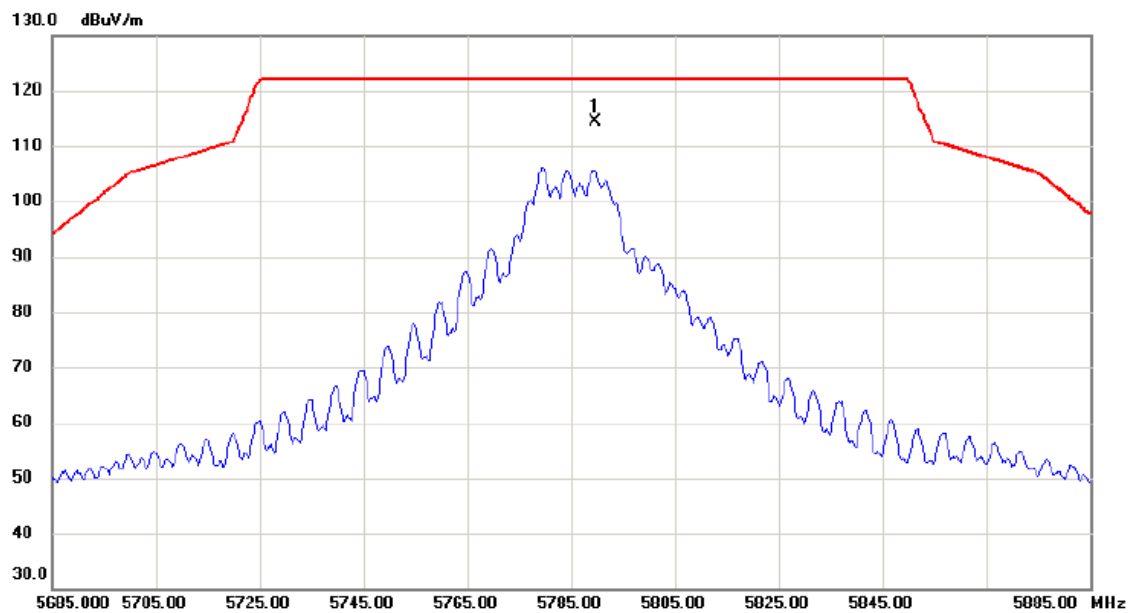

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5789.600	114.60	-0.15	114.45	122.20	-7.75	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

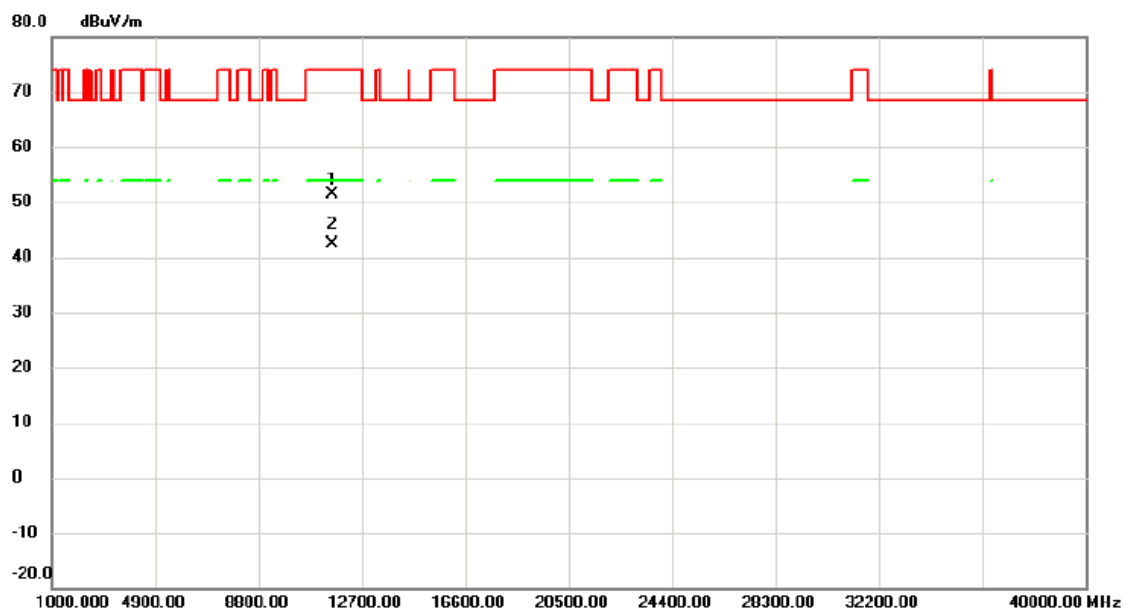


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11568.60	48.72	2.73	51.45	74.00	-22.55	peak	
2	*	11570.85	39.60	2.71	42.31	54.00	-11.69	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

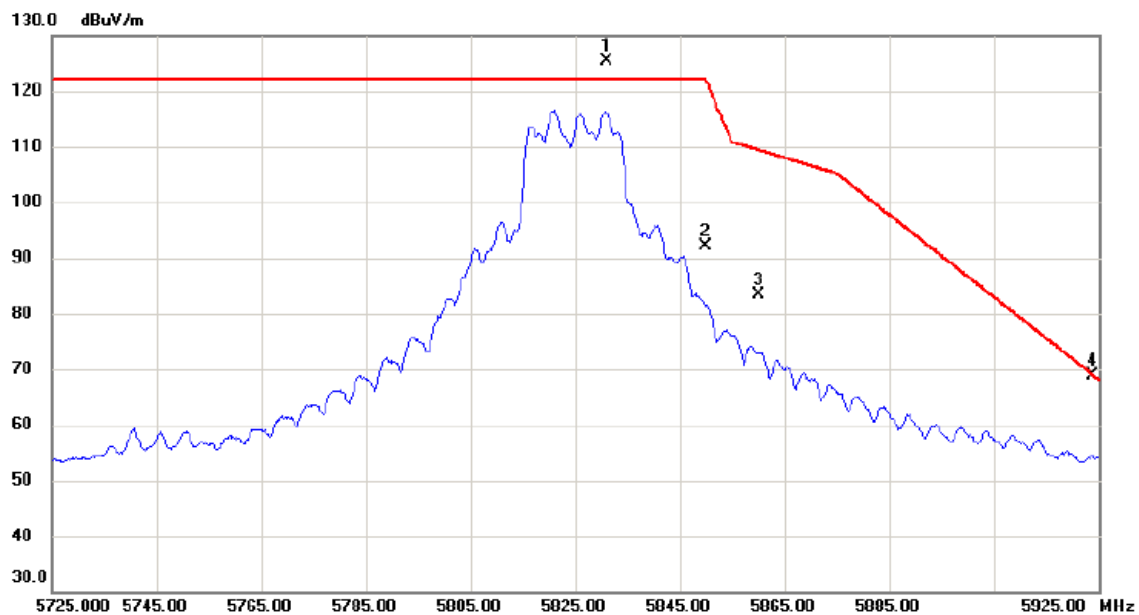

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5831.100	125.52	-0.04	125.48	122.20	3.28	peak	主波訊號不予判定
2		5850.000	92.19	0.00	92.19	122.20	-30.01	peak	
3		5860.000	83.44	0.03	83.47	109.40	-25.93	peak	
4		5923.700	68.63	0.19	68.82	69.16	-0.34	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

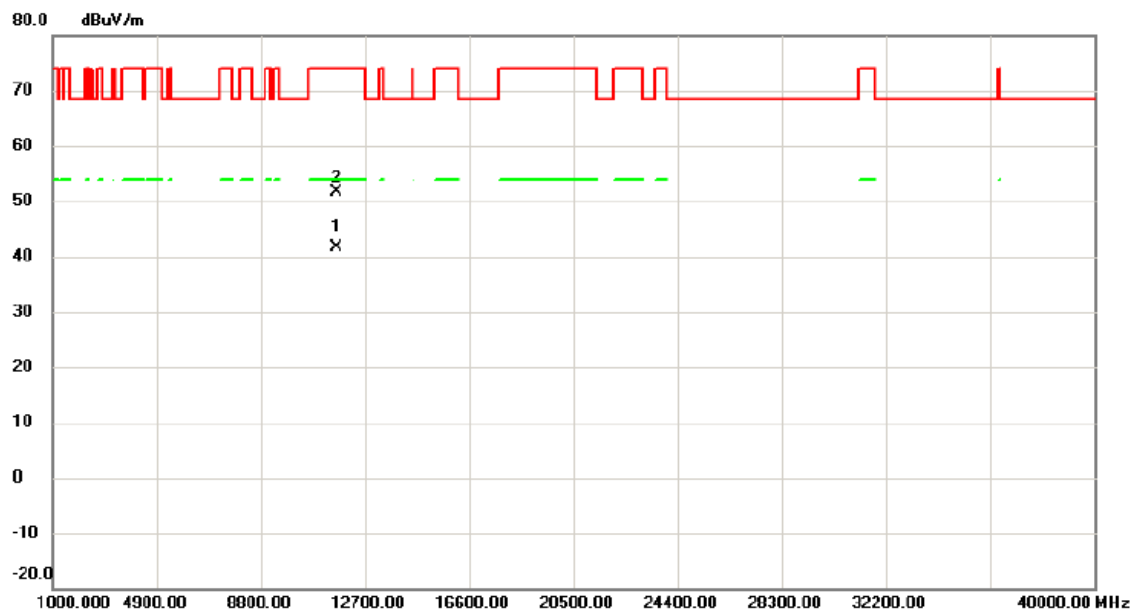


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11648.25	39.04	2.50	41.54	54.00	-12.46	AVG	
2		11649.20	49.01	2.50	51.51	74.00	-22.49	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

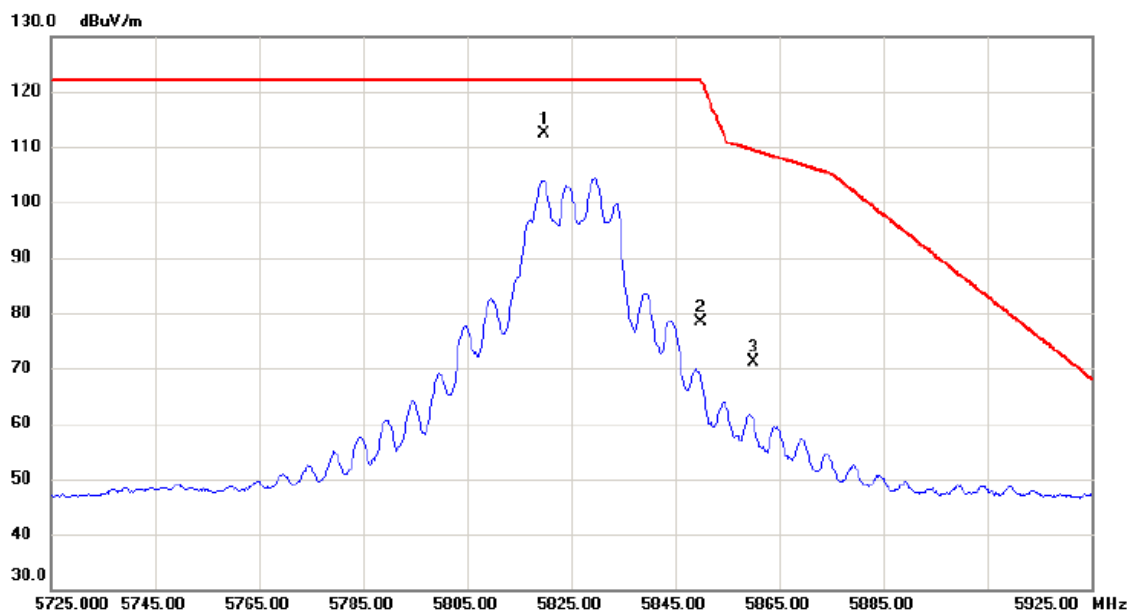

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5819.800	112.43	-0.08	112.35	122.20	-9.85	peak	主波訊號不予判定
2		5850.000	78.39	0.00	78.39	122.20	-43.81	peak	
3		5860.000	71.16	0.03	71.19	109.40	-38.21	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

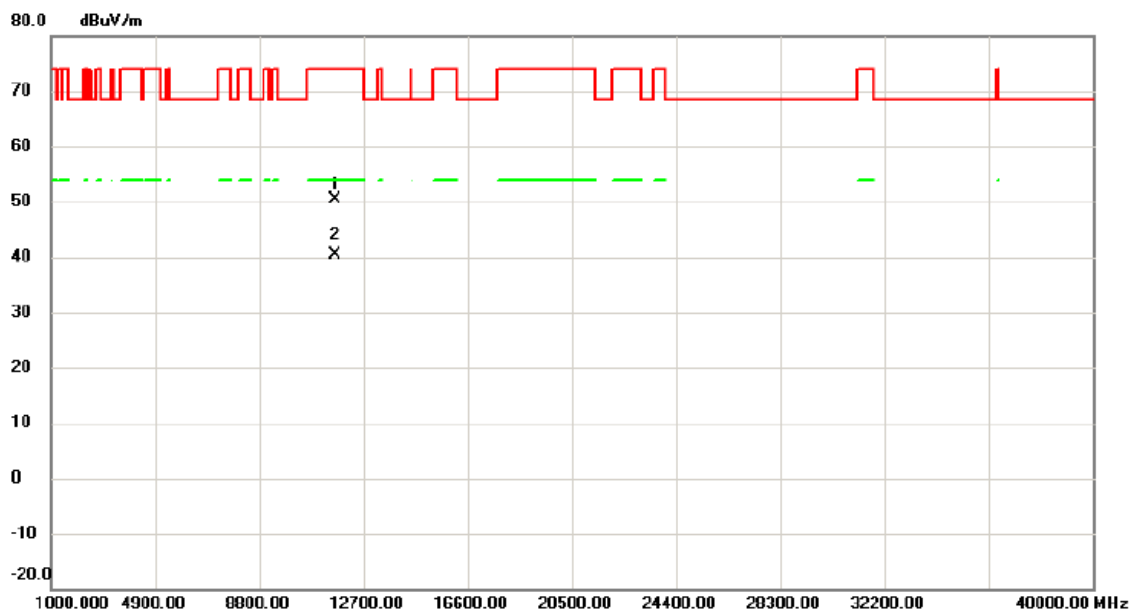


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11648.65	47.91	2.50	50.41	74.00	-23.59	peak	
2	*	11653.70	37.98	2.49	40.47	54.00	-13.53	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

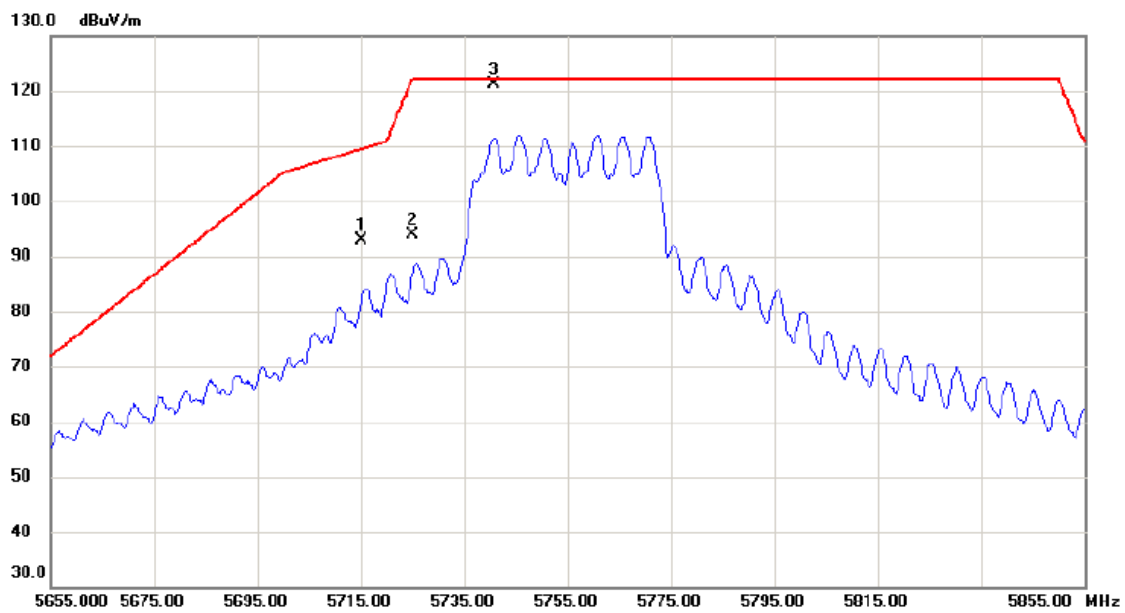

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	93.32	-0.35	92.97	109.40	-16.43	peak	
2		5725.000	94.20	-0.31	93.89	122.20	-28.31	peak	
3	*	5740.700	121.44	-0.26	121.18	122.20	-1.02	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/03/05

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

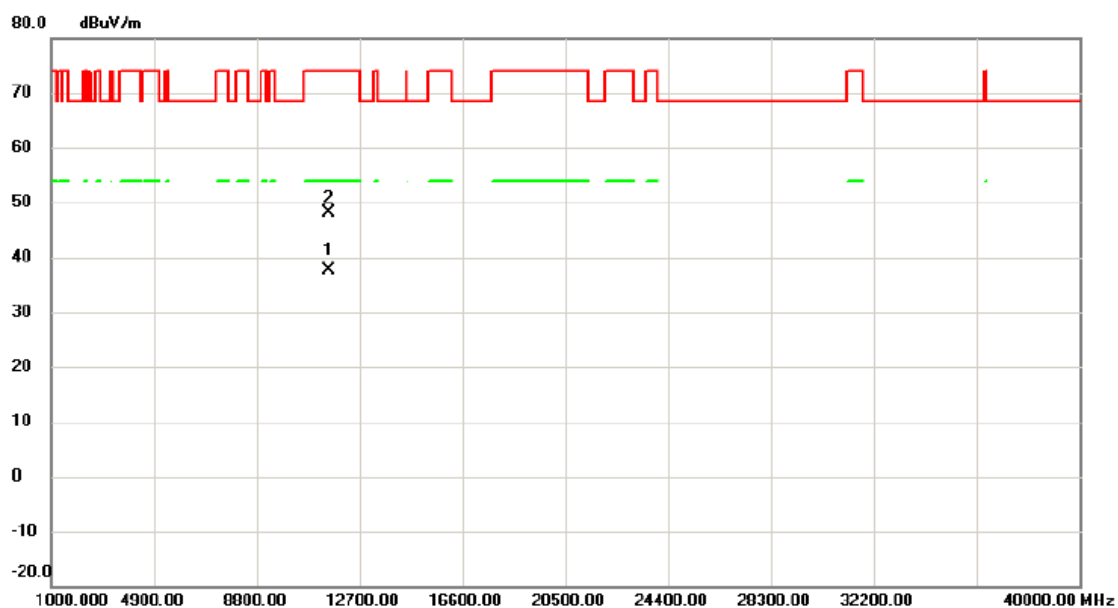

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11508.45	34.68	2.88	37.56	54.00	-16.44	AVG	
2		11509.65	45.37	2.88	48.25	74.00	-25.75	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

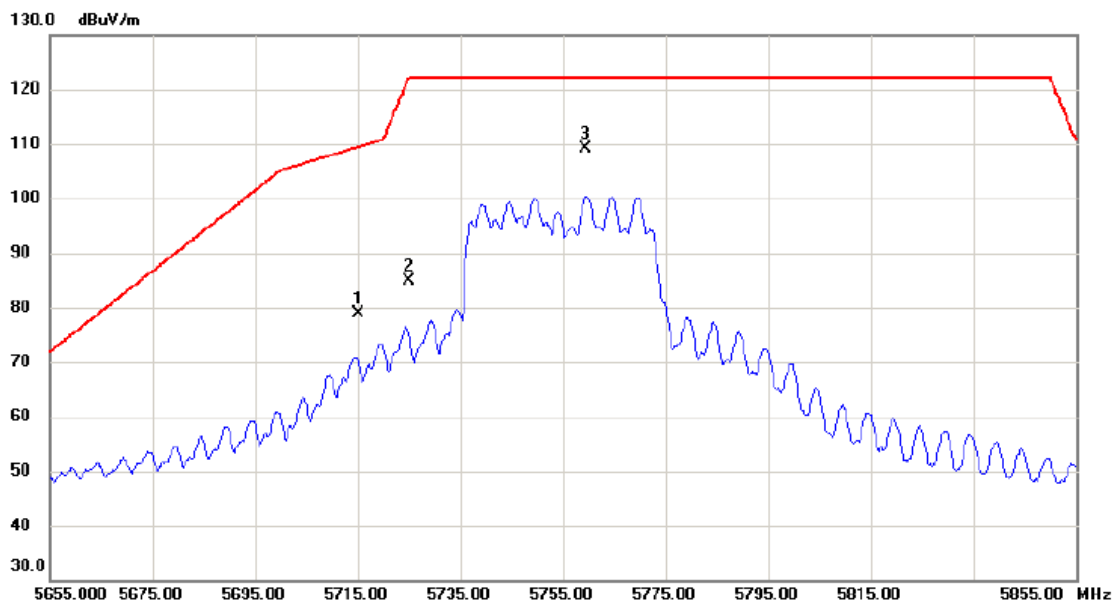


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	79.31	-0.35	78.96	109.40	-30.44	peak	
2		5725.000	85.11	-0.31	84.80	122.20	-37.40	peak	
3	*	5759.500	109.29	-0.23	109.06	122.20	-13.14	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
 5755 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/05
 環境濕度: 66%

Orthogonal Axis: X Polarization: Horizontal

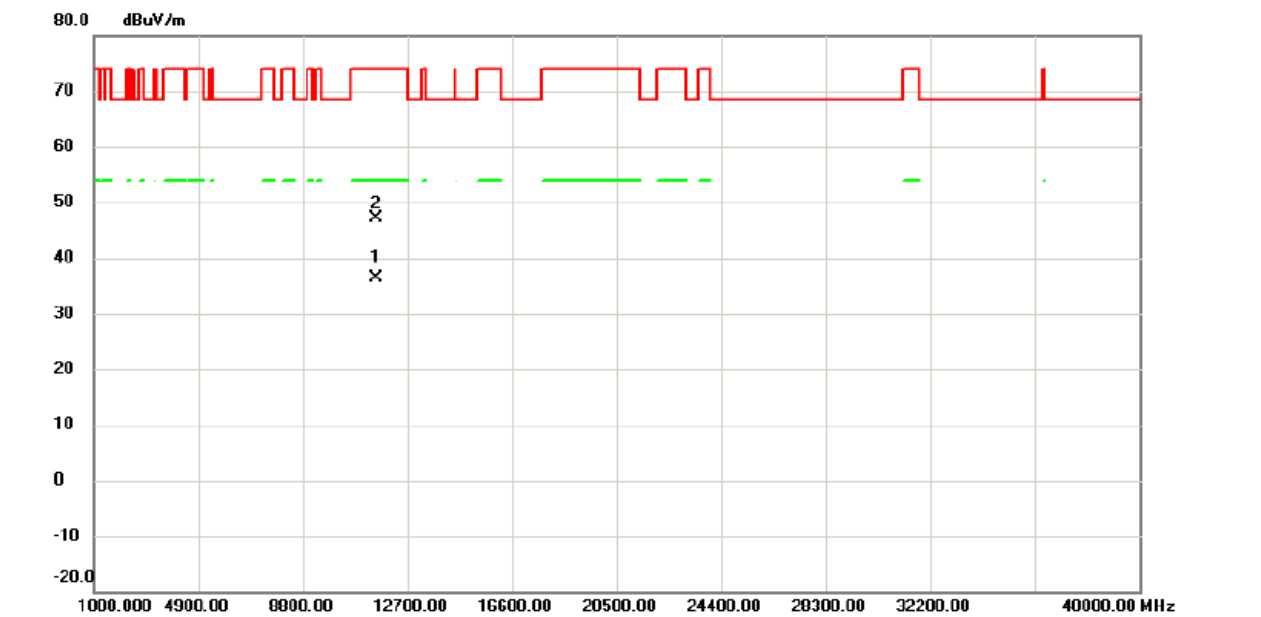


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11513.90	33.46	2.88	36.34	54.00	-17.66	AVG	
2		11525.20	44.36	2.84	47.20	74.00	-26.80	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

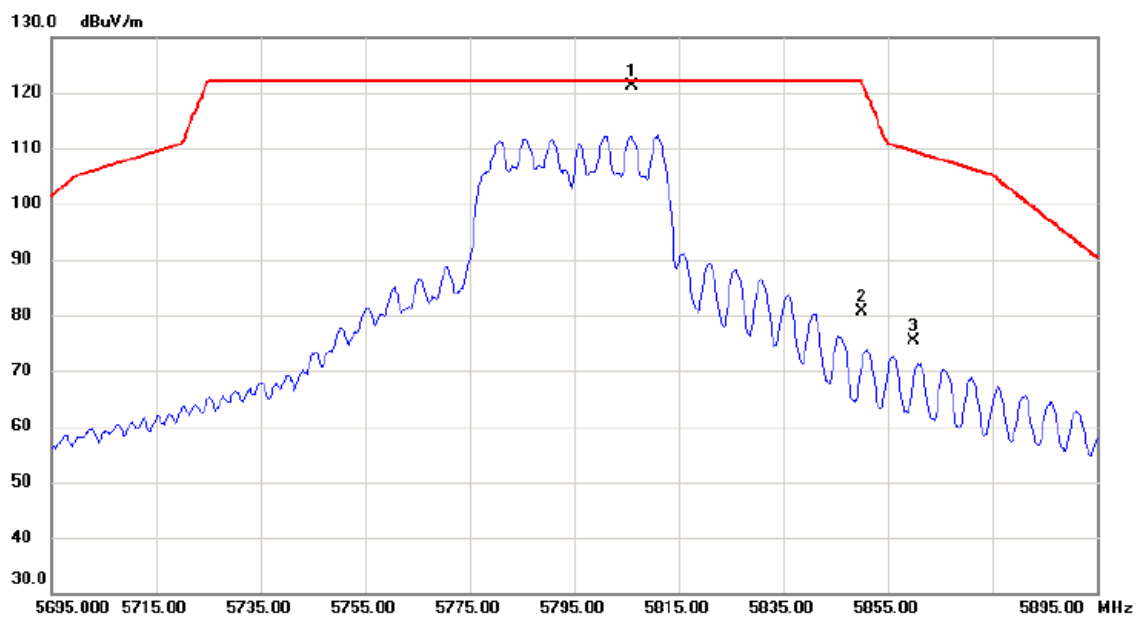

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5806.100	121.28	-0.11	121.17	122.20	-1.03	peak	主波訊號不予判定
2		5850.000	80.63	0.00	80.63	122.20	-41.57	peak	
3		5860.000	75.45	0.03	75.48	109.40	-33.92	peak	