



TEST REPORT

Report Number..... : ZKT-250929123789E-1

Date of Test..... Nov. 15, 2025- May. 09, 2026

Date of issue..... : May. 10, 2026

Total number of pages..... 25

Test Result : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Autel Robotics Co., Ltd.

Address : Unit 29-24, 9-Meter Commercial Platform, Fund Town, 128 Guiwan 5th Road, Nanshan Subdistrict, Qianhai Shenzhen-Hong Kong Modern Service Industry Cooperation Zone, Shenzhen, Guangdong, 518000, China

Manufacturer's name : Autel Robotics Co., Ltd.

Address : Unit 29-24, 9-Meter Commercial Platform, Fund Town, 128 Guiwan 5th Road, Nanshan Subdistrict, Qianhai Shenzhen-Hong Kong Modern Service Industry Cooperation Zone, Shenzhen, Guangdong, 518000, China

Factory's 1 name..... : Autel Robotics Co., Ltd.Guangming Branch

Address : Electronic plant east side 701, West 701 Building 3, Yanxiang Technology Industrial Park, Gaoxin Road, Dongzhou Community, Guangming Street, Guangming District, Shenzhen City, Guangdong Province, P.R. China

Factory's 2 name..... : AUTEL ROBOTICS VIETNAM COMPANY LIMITED

Address : Factory A, Lot IN3-11*B VSIP HaiPhong Urban, Industrial and Service Area, Dinh Vu – Cat Hai Economic Zone, Lap Le Commune, Thuy Nguyen District, Hai Phong City, Vietnam

Test specification:

Standard..... : Article 2 paragraph 1 item 19
Notice No.88 Annex 43

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-153_V0

Test Report Form(s) Originator..... : ZKT Testing

Master TRF : Dated: 2020-01-06



This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the Telec requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Autel Smart Controller V3

Trademark : AUTEL ROBOTICS

Model/Type reference..... : EF9-3A

Adapter information:

Model no.: GaN-001JP

Input: 100-240V~50/60Hz 1.5A

Output Power: 65.0W Max

USB-C1/C2: 5.0V---3.0A, 9.0V---3.0A, 12.0V---3.0A, 15.0V---3.0A,

20.0V---3.25A 65.0W Max

USB-A: 3.4-5.5V---5.0A, 5.0V---3.0A, 9.0V---3.0A, 12.0V---3.0A,

Ratings..... : 20.0V---3.0A 60.0W Max

Rechargeable Lithium-ion Battery:

Model : DT3S1P

Nominal voltage: 11.55V DC

Max Charge Voltage: 13.2V DC

Nominal capacity: 6120mAh

Minimum capacity: 5800mAh



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Jim Liu

Reviewer (name + signature).....: Jackson Fang

Approved (name + signature).....: Lake Xie





Table of Contents

Page

1. VERSION	6
2. SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3. GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TEST CONDITIONS	11
3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
4. RF SHIELDING METHOD	14
5. TEST RESULT FOR BLUETOOTH	15
5.1 FREQUENCY ERROR	15
5.1.1 LIMIT	15
5.1.2 MEASURING INSTRUMENTS AND SETTING	15
5.1.3 TEST PROCEDURES	15
5.1.4 TEST SETUP LAYOUT	15
5.1.5 EUT OPERATION DURING TEST	15
5.2 ANTENNA POWER	16
5.2.1 LIMIT	16
5.2.2 MEASURING INSTRUMENTS AND SETTING	16
5.2.3 TEST PROCEDURES	16
5.2.4 TEST SETUP LAYOUT	17
5.2.5 TEST DEVIATION	17
5.2.6 TEST RESULT	17
5.3 OCCUPIED BANDWITH(99% AND 90%)	18
5.3.1 LIMIT	18
5.3.2 MEASURING INSTRUMENTS AND SETTING	18
5.3.3 TEST PROCEDURES	18
5.3.4 TEST SETUP LAYOUT	18
5.3.5 TEST DEVIATION	18
5.3.6 EUT OPERATION DURING TEST	18
5.4 UNWANTED EMISSION INTENSITY MEASUREMENT	19
5.4.1 LIMIT	19
5.4.2 MEASURING INSTRUMENTS AND SETTING	19



Table of Contents

Page

5.4.3 TEST PROCEDURES	19
5.4.4 TEST SETUP LAYOUT	20
5.4.5 TEST DEVIATION	20
5.5.1 LIMIT	21
5.5.2 MEASURING INSTRUMENTS AND SETTING	21
5.6.3 TEST PROCEDURES	21
5.5.4 TEST SETUP LAYOUT	21
5.5.5 TEST RESULT	21
5.6 IMITATION OF COLLATERAL EMISSION OF RECEIVER MEASUREMENT	22
5.6.1 LIMIT	22
5.6.2 MEASURING INSTRUMENTS AND SETTING	22
5.6.3 TEST PROCEDURES	22
5.6.4 TEST RESULT	22
5.7 INTERFERENCE SUPPRESSION	23
6. EUT TEST PHOTO	24
7. EUT CONSTRUCTIONAL DETAILS	24



1. VERSION

Report No.	Version	Description	Approved
ZKT-250929123789E-1	Rev.01	Initial issue of report	May. 10, 2026



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

MIC Notice No.88 Appendix No.43 Article 2 Paragraph 1 item19		
Clause	Test Item	Result
3	Frequency Error	Pass
6	Antenna Power	Pass
6	Tolerances for antenna power	Pass
4	Transmission rate	Pass
4	99% Occupied bandwidth	Pass
4	Spread spectrum bandwidth	Pass
13	Dwell time	Pass
11	Spurious Emissions Intensity	Pass
7	Limit of secondary radiated emissions	Pass
12	Interference suppression	Pass

Remarks

1. Pass: The EUT complies with the carrier sense capability and radio interference prevention capability.
2. EIRP does not exceed 6.91dBm/MHz
3. it is refer to the antenna specification.



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add.: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

China Registered No.: CNAS L11527

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	Radiated Emission Test	$\pm 4.7\text{dB}$
3	RF power conducted	$\pm 0.16\text{dB}$
4	Spurious emissions conducted	$\pm 0.21\text{dB}$
5	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
6	All emissions radiated(>1G)	$\pm 5.0\text{dB}$
7	frequency error ppm	$\pm 0.5\text{ppm}$



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Autel Smart Controller V3
Model No.:	EF9-3A
Hardware Version:	MDC_PAD2-LDRF_V3
Software Version:	V1.9.5.167
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation technology:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated power:	GFSK:0.004mW/MHz $\pi/4$ -DQPSK:0.001mW/MHz 8DPSK:0.001mW/MHz
Antenna Specification:	PIFA antenna
Antenna Gain:	2.7dBi
Power supply:	Adapter information: Model no.:GaN-001JP Input:100-240V~50/60Hz 1.5A Output Power:65.0W Max USB-C1/C2:5.0V---3.0A,9.0V---3.0A,12.0V---3.0A,15.0V---3.0A, 20.0V---3.25A 65.0W Max USB-A:3.4-5.5V---5.0A,5.0V---3.0A,9.0V---3.0A,12.0V---3.0A, 20.0V---3.0A 60.0W Max Rechargeable Lithium-ion Battery: Model : DT3S1P Nominal voltage:11.55V DC Max Charge Voltage:13.2V DC Nominal capacity:6120mAh Minimum capacity:5800mAh



Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

- 3.


Final test channel as follow:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	39	2441	78	2480



3.2 DESCRIPTION OF TEST MODES

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

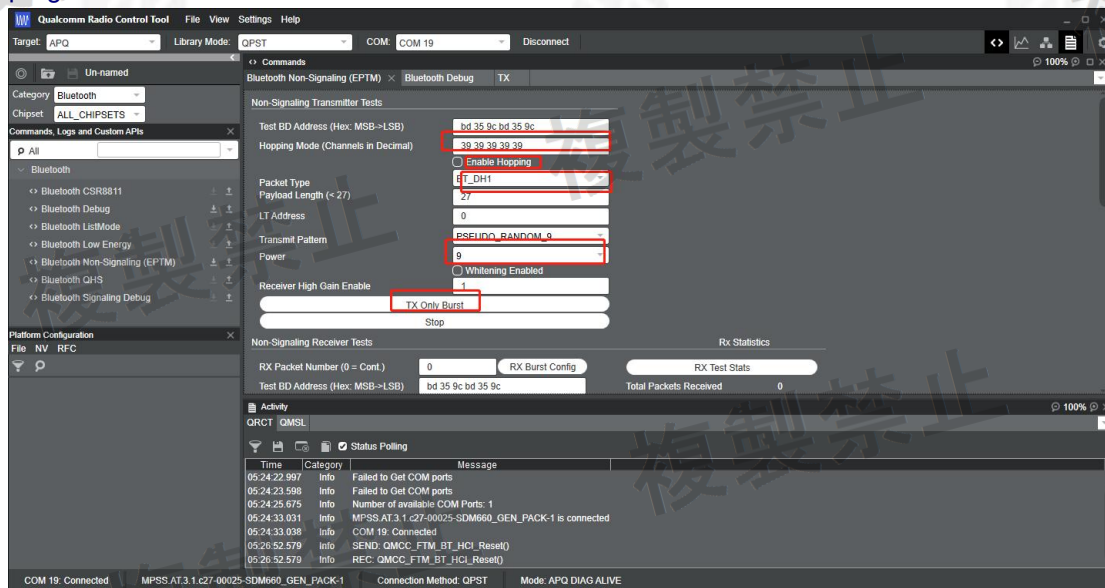


POWER	Frequency		
	2402MHz	2441MHz	2480MHz
	Default	Default	Default

3.3 TEST CONDITIONS

Supply Voltage			
	Input Voltage (Vdc)	Voltage at the input of the RF Circuit (Vdc)	Tolerance (%)
Normal	11.55	3.3	
+10%	12.70	3.3	0
-10%	10.39	3.3	0
Others			
Temperature (°C)	23		
Relative humidity	51 %.		
ATM Pressure:	1019 mbar		
Note: The EUT has its own voltage regulator principle from ETA1753FSG, the output voltage of the chip is 3.3V and the fluctuation of power supply to the RF circuit of EUT is equal to or less than +/- 1%. So exempt extremely high and low supply voltage condition tests, EUT only operated in normal voltage to test all regulations.			



3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

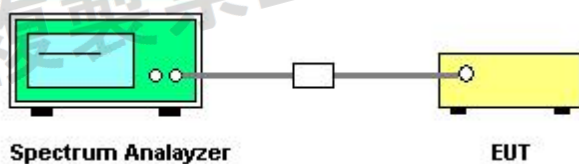

3.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
	Autel Smart Controller V3	AUTEL ROBOTICS	EF9-3A	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Nov. 02, 2025	Nov. 02, 2026
2	EMI Test Receiver (9kHz-7GHz)	R&S	ESC17	100969	Nov. 02, 2025	Nov. 02, 2026
3	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Nov. 13, 2025	Nov. 13, 2026
4	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Nov. 13, 2025	Nov. 13, 2026
5	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	Nov. 13, 2025	Nov. 13, 2026
6	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	Nov. 02, 2025	Nov. 02, 2026
7	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	Nov. 02, 2025	Nov. 02, 2026
8	Loop Antenna	TESEQ	HLA6121	58357	Nov. 02, 2025	Nov. 02, 2026
9	Test Cable	N/A	RF-01	N/A	Nov. 02, 2025	Nov. 02, 2026
10	Test Cable	N/A	RF-02	N/A	Nov. 02, 2025	Nov. 02, 2026
11	Test Cable	N/A	RF-03	N/A	Nov. 02, 2025	Nov. 02, 2026
12	Wideband Radio Communication Test	R&S	CMW500	106504	Nov. 02, 2025	Nov. 02, 2026
13	ESG Signal Generator	Agilent	E4421B	N/A	Nov. 02, 2025	Nov. 02, 2026
14	Signal Generator	Agilent	N5182A	N/A	Nov. 02, 2025	Nov. 02, 2026
15	D.C. Power Supply	LongWei	TPR-6405D	N/A	Nov. 02, 2025	Nov. 02, 2026
16	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
17	MWRF Power Meter Test system	MW	MW100-RFCB	N/A	Nov. 02, 2025	Nov. 02, 2026
18	Digital oscilloscope	Tektronix	TDS3032B	N/A	Nov. 02, 2025	Nov. 02, 2026

All of the instruments are calibrated by CEPREI Calibration and Testing Center.


- ☐ (a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) or a designated calibration agency under Article 102-18-1 of the Radio Act.
- ☐ (b) Calibration conducted based on the regulations of Article 135 or 144 of the Measurement Act.
- ☒ (c) Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 of the Radio Act.
- ☐ (d) Calibration, etc. conducted by using measuring instruments and other facilities listed at the bottom of appended table 3 of the Radio Act, which is to have been calibrated as described in (a) through (c) above.



4. RF SHIELDING METHOD

Enclosure:

The high-frequency part of this electronic testing equipment (except for the antenna system) is all protected by an outer casing, which is tightened by hexagonal screws. The casing is not easy to be opened. Please refer to the photo of this equipment.

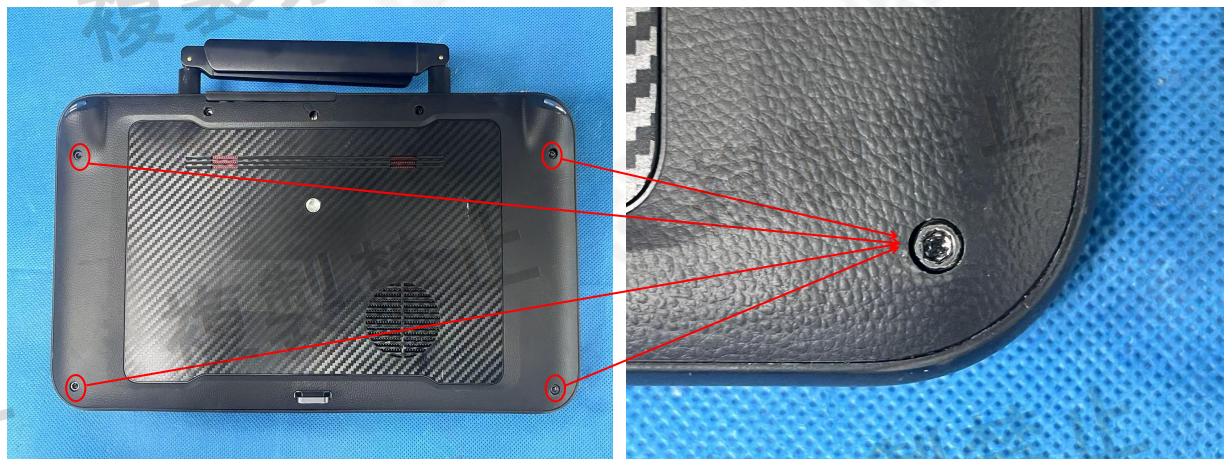



5. TEST RESULT FOR BLUETOOTH

5.1 FREQUENCY ERROR

5.1.1 LIMIT

Item	Limits
Frequency Error	±50ppm

5.1.2 MEASURING INSTRUMENTS AND SETTING

The following table is the setting of Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	10KHz
Detector	Peak
Span	1MHz
Trace	Max Hold
Sweep Time	Auto

5.1.3 TEST PROCEDURES

- (1) In the case of unmodulated signal (continuous or continuous burst), measure the frequency directly by a frequency meter.
- (2) In the case of burst waves, the measurement shall be done for enough time in order to obtain the enough measuring accuracy, and the average of the measured values becomes the final value.
- (3) In the case of a test mode with a specific frequency spectrum, measure the frequency of the specific spectrum by a spectrum analyzer.
- (4) In the cases above, if the frequency equivalent to the test frequency is not directly measured in principle, it shall be obtained by necessary calculation.

In the case of modulated signal, if there is no specific spectrum measurable by a spectrum analyzer but a specific dip is observed, it is allowed to measure the frequency with the signal generator (synthesized). That is, observe a signal of the signal generator concurrently (or alternately) with the tested signal using the spectrum analyzer while setting the frequency of the signal generator to the position of the dip on the screen of the spectrum analyzer, and determine the frequency of the signal generator at the time as a measured value.

5.1.4 TEST SETUP LAYOUT



5.1.5 EUT OPERATION DURING TEST

The EUT was placed on the test table and programmed in un-modulation function.

Measurement Data: The detailed test data see Appendix I



5.2 ANTENNA POWER

5.2.1 LIMIT

Item	Limits
EIRP Power Density	3mW/MHz (FHSS from 2400-2483.5MHz) The output power tolerance must be within +20% E.I.R.P: $\leq 6.91\text{dBm/MHz}$ (FHSS from 2400-2483.5MHz)
Antenna Power Error	$\leq 20\%$ (Base on manufacturer declare antenna power density)

5.2.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1 MHz
Span	Span=2400~2483.5MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2.3 TEST PROCEDURES

1. A power meter is connected on the IF output port of the spectrum analyzer.
2. Adjust the spectrum analyzer to have the center frequency the same with the measured carrier. RBW=VBW=1MHz, detector mode is positive peak. Turn off the averaging function and use zero span.
3. The calibrating signal power shall be reduced to 0 dBm and it shall be verified that the power meter reading also reduces by 10 dB.
4. Connect the equipment to be measured. Using the following settings of the spectrum analyzer in combination with "max hold" function, find the frequency of highest power output in the power envelope: center frequency equal to operating frequency; RBW & VBW: 1 MHz; detector mode: positive peak; averaging: off; span: 3 times the spectrum width; amplitude: adjust for middle of the instrument' range. The frequency found shall be recorded.
5. Set the center frequency of the spectrum analyzer to the found frequency and switch to zero span. The power meter indicates the measured power density "E".
6. Calculate antenna power density by the formula below $PD = Pt + 10 \cdot \log(1/x)$.
x: The duty cycle of the EUT in continuously transmitting mode
Pt: Output power of the SSG
7. Antenna Power Error is definition that actual measure antenna power tolerance between + 20% to - 80% power range that base on manufacturer declare the conducted power density.



5.2.4 TEST SETUP LAYOUT

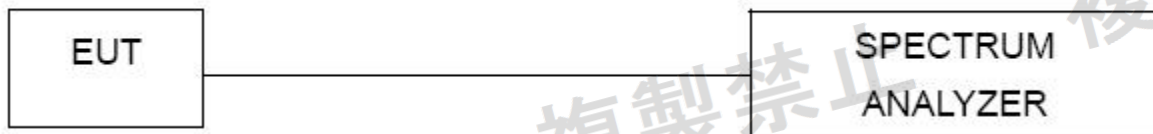

5.2.5 TEST DEVIATION

There is no deviation with the original standard.

5.2.6 TEST RESULT

Measurement Data: The detailed test data see Appendix I



5.3 OCCUPIED BANDWIDTH(99% AND 90%)

5.3.1 LIMIT


Item	Limits
Occupied Band Width:	$\leq 83.5\text{MHz}$
Spreading Bandwidth:	$\geq 500\text{ kHz}$

5.3.2 MEASURING INSTRUMENTS AND SETTING

5.3.3 TEST PROCEDURES

- Setting of SA is following as: RB: 1MHz / VB:1MHz / SPAN: 160MHz Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
- EUT have transmitted the maximum modulation signal and fixed channelize (For DSSS or OFDM Device) or continuous maximum power of hopping mode(For FHSS Device). SA set to 99% of occupied bandwidth to measure occupied bandwidth. The limit is less than 26MHz(For DSSS or OFDM Device) or 83.5MHz(For FHSS Device).
- SA set to 90% of occupied bandwidth to measure Spread Spectrum Bandwidth and must greater than 500kHz.
- Spread Spectrum Factor = Spread Spectrum Bandwidth / modulation rate of EUT.
- Spread Spectrum Factor limit is greater than 5

5.3.4 TEST SETUP LAYOUT

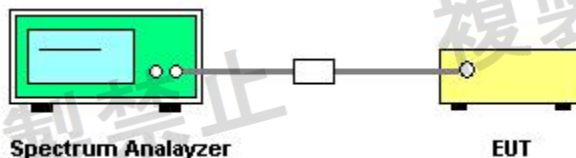

5.3.5 TEST DEVIATION

There is no deviation with the original standard.

5.3.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

Measurement Data: The detailed test data see Appendix I



5.4 UNWANTED EMISSION INTENSITY MEASUREMENT

5.4.1 LIMIT

Item	Limits
TX Spurious Emission	30MHz - 2387MHz ; 2.5 μ W/MHz or less 2387MHz – 2400MHz ; 25 μ W/MHz or less 2483.5MHz – 2496.5MHz ; 25 μ W/MHz or less 2496.5MHz – 12.5GHz ; 2.5 μ W/MHz or less

5.4.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.4.3 TEST PROCEDURES

1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: Below 1GHz RB:1MHz / VB:1MHz
Above 1GHz RB:1MHz / VB:1MHz / AT: 10dB Ref: 0dBm / Sweep time: Auto
Sweep Mode: Continuous sweep / Detect mode: Positive peak
Trace mode: Max hold
3. Setting of SA is following as 30MHz and stop frequency 1000MHz Then to mark peak reading value + cable loss shall be less than 0.25 μ W.
4. Setting of SA is following as 1000MHz and stop frequency 2387MHz Then to mark peak reading value + cable loss shall be less than 2.5 μ W.
5. SA adjusted to start frequency 2387MHz and stop frequency 2400MHz. Then to mark peak reading value + cable loss shall be less than 25 μ W.
6. SA adjusted to start frequency 2483.5MHz and stop frequency 2496.5MHz Then to mark peak reading value + cable loss shall be less than 25 μ W
7. SA adjusted to start frequency 2496.5MHz and stop frequency 12500MHz Then to mark peak reading value + cable loss shall be less than 2.5 μ W
8. Measure side band spurious as follows: For 2.4GHz band: 2374MHz~2400MHz and 2483.5MHz~2509.5MHz RBW = VBW = 30kHz, Result_Value = Measured_Value + 15.2 [dBm]
9. If the Result_Value is over the requirement, take total sum of 1MHz band centered at the spur frequency like ACLP measurement as Result_Value.



5.4.4 TEST SETUP LAYOUT

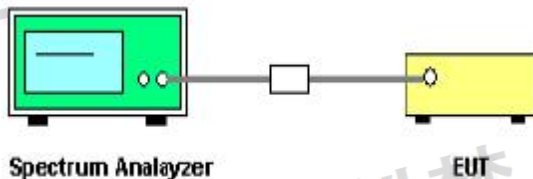

5.4.5 TEST DEVIATION

There is no deviation with the original standard.

Measurement Data: The detailed test data see Appendix I



5.5 DWELL TIME

5.5.1 LIMIT

Item	Limits
Hopping Freq. Dwell Time	$\leq 0.4 \text{ sec (In } 0.4 \text{ sec} \times \text{ spreading rate)}$

5.5.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 Hz
RB	1 MHz
VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep	Continuous

5.6.3 TEST PROCEDURES

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- Dwell time = $[\text{spreading rate}/79] \times \text{duty-cycle} \times 0.4 \text{ seconds}$. (to be determined for each mode, DH1, DH3, DH5)

5.5.4 TEST SETUP LAYOUT

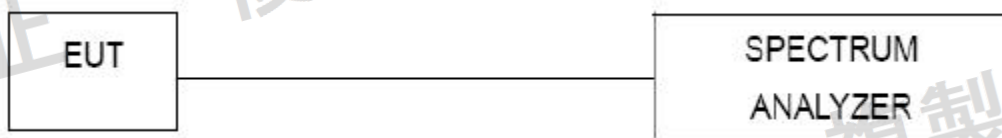

5.5.5 TEST RESULT

Measurement Data: The detailed test data see Appendix I



5.6 IMITATION OF COLLATERAL EMISSION OF RECEIVER MEASUREMENT

5.6.1 LIMIT

Item	Limits
RX Spurious Emission:	$\leq 4\text{nW}$ ($f < 1\text{GHz}$)
	$\leq 20\text{nW}$ ($1\text{GHz} \leq f$)

5.6.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
VB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.6.3 TEST PROCEDURES

1. EUT have the continuous reception mode and fixed only one channelize.
2. Setting of SA is following as RB / VB: 100 kHz (below 1GHz emissions) / 1 MHz (above 1GHz emissions) / AT: 10dB / Ref: 0dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
3. SA set RB: 100kHz and VB: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW
4. SA set RB: 1MHz and VB: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW
5. If power level of lower emissions are more than 1/10 of limit (.0.4nW for $f < 1\text{GHz}$, 2nW for $f \geq 1\text{GHz}$), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.

5.6.4 TEST RESULT

Measurement Data: The detailed test data see Appendix I



5.7 INTERFERENCE SUPPRESSION

Measurement procedure:	The radio equipment with automatic transmitting function of identification code Transmit the assigned identification code from the radio equipment. Confirm the identification code received by the demodulator. The radio equipment with automatic receiving function of identification code Transmit the assigned identification code from the opposite equipment. Confirm that the usual communication is available. Transmit the identification code distinct from the assigned one from the opposite equipment. Confirm that the radio equipment is stopped or an indication is displayed as the identification code is different.
Test setup:	Radio equipment Dummy load Attenuator) Demodulator
Test Instruments:	Refer to section 5.8 for details
Test results:	Pass

Measurement data:	
Identification function:	Good
MAC address :	22:22:06:3C:97:00



6. EUT TEST PHOTO

Reference to the appendix **Testup PHOTOS** for details.

7. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix **External & Internal PHOTOS** for details.

***** END OF REPORT *****