

Test Report No.50249486 001

Appendix D: Radiated and Mains Spurious Emission Data



(File: 50249486AppendixD)

Contents



Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G	6
Spurious Emissions, TX Mode, 18-26G	12
Spurious Emissions, TX Mode, 30M-1G	18
Spurious Emissions, TX Mode, 9k-30M	20
Spurious Emissions, RX Mode, 1-18G	22
Spurious Emissions, RX Mode, 18-26G	24
Spurious Emissions, RX Mode, 30M-1G	26
Spurious Emissions, RX Mode, 9K-30M	28

Radiated Bandedge (GFSK)

Low Channel (Hor)

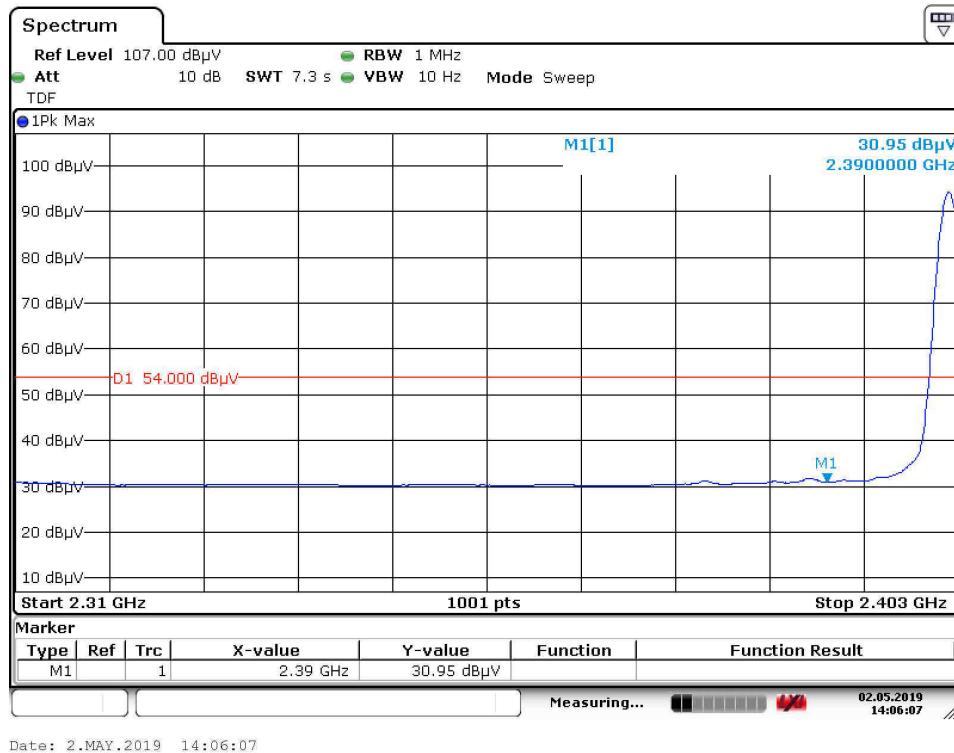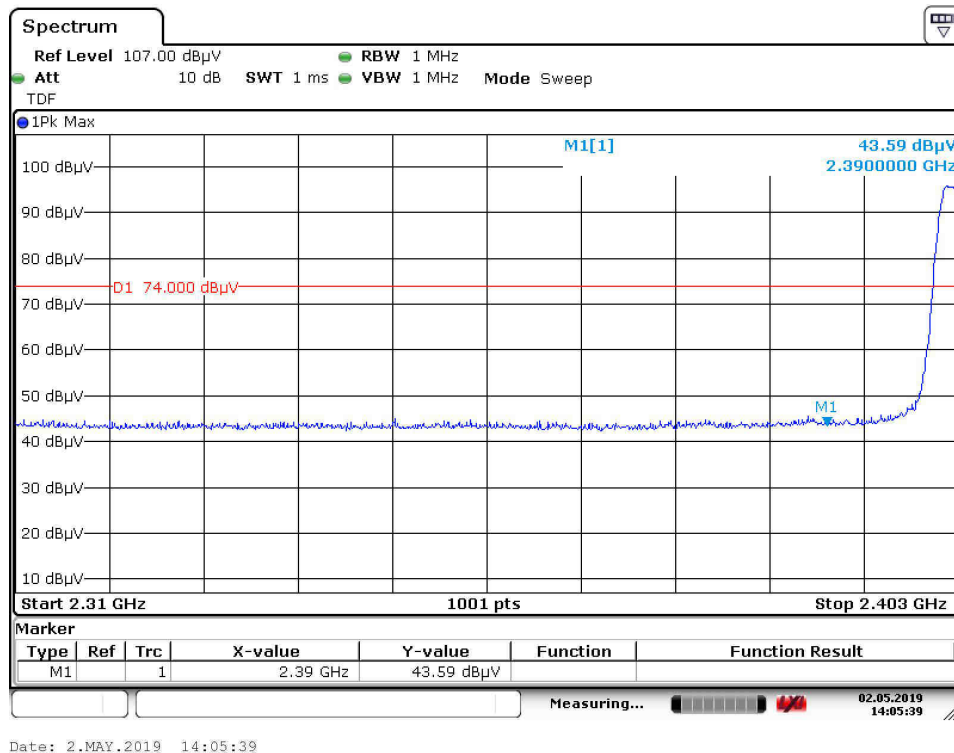



Low Channel (Ver)

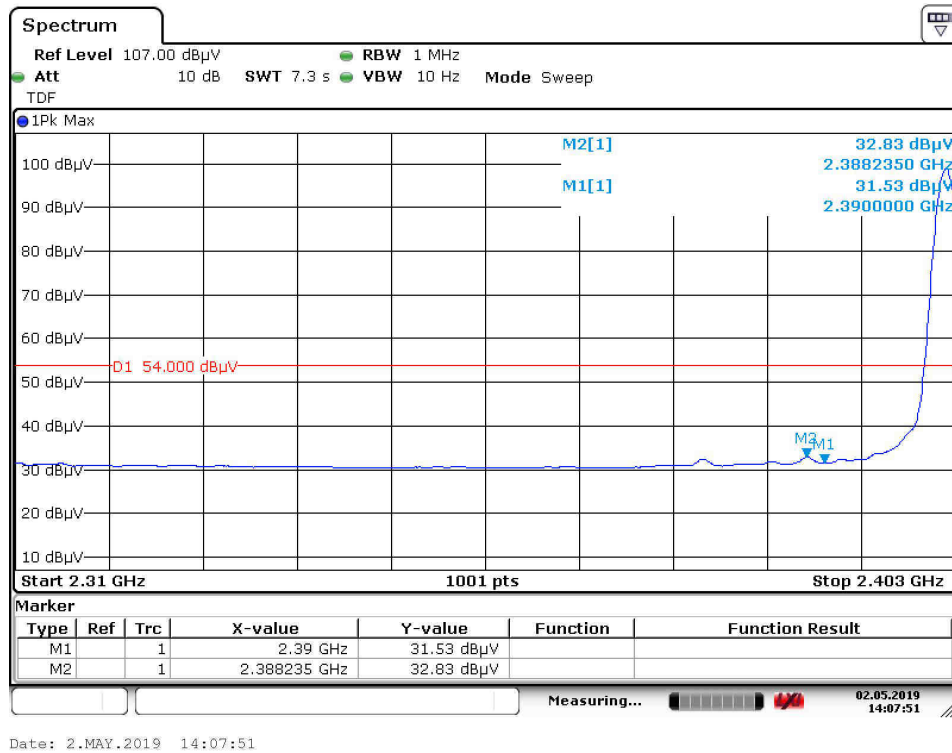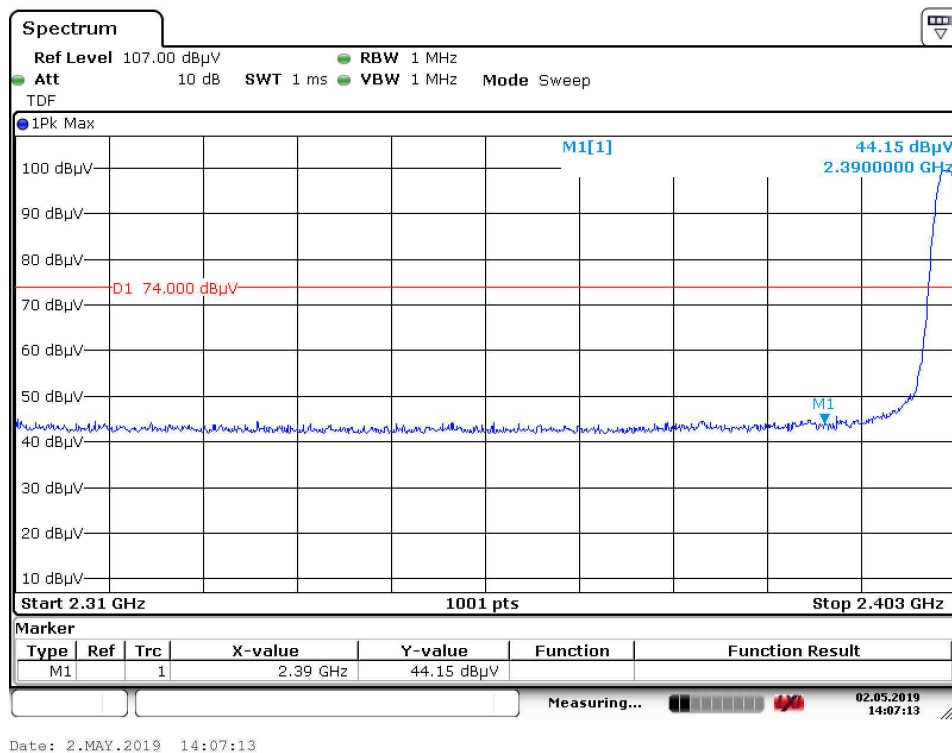

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge (GFSK)

High Channel (Hor)

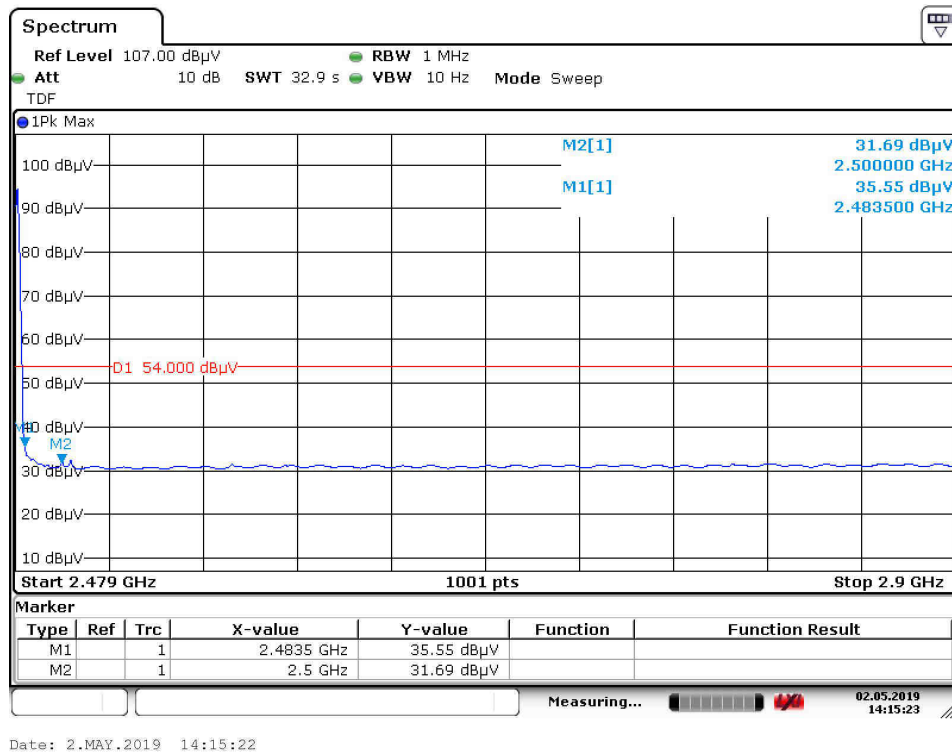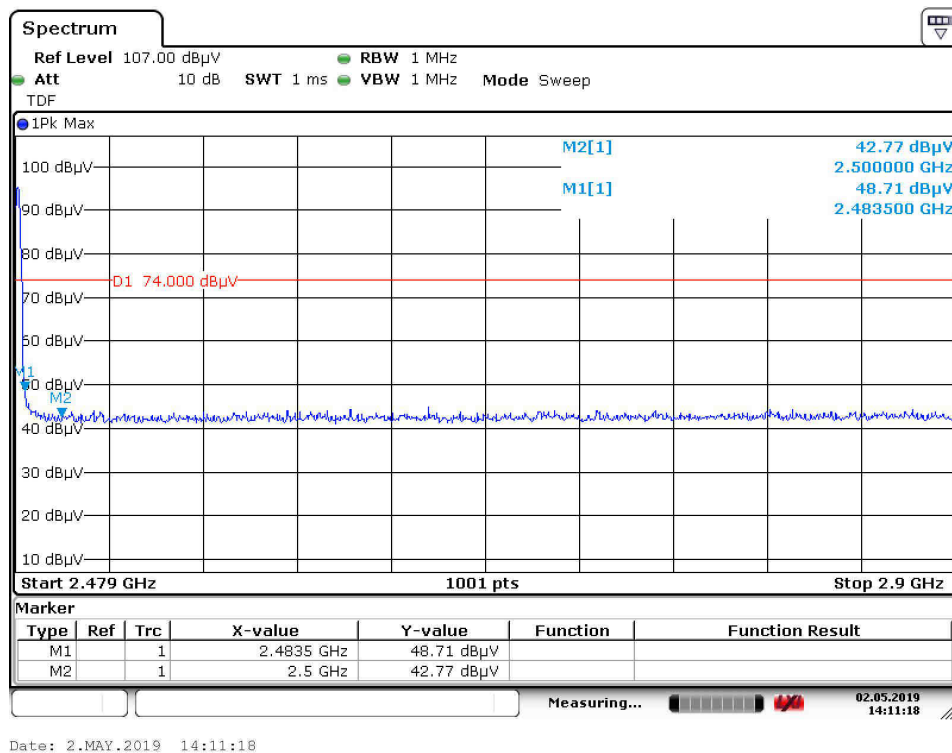

Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver)

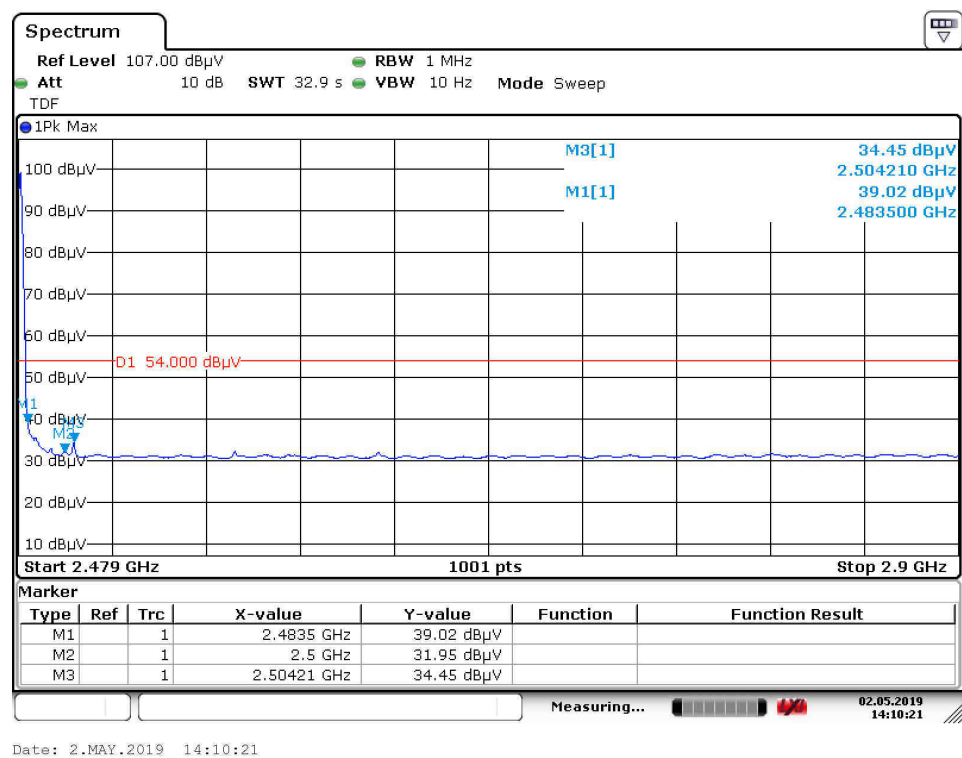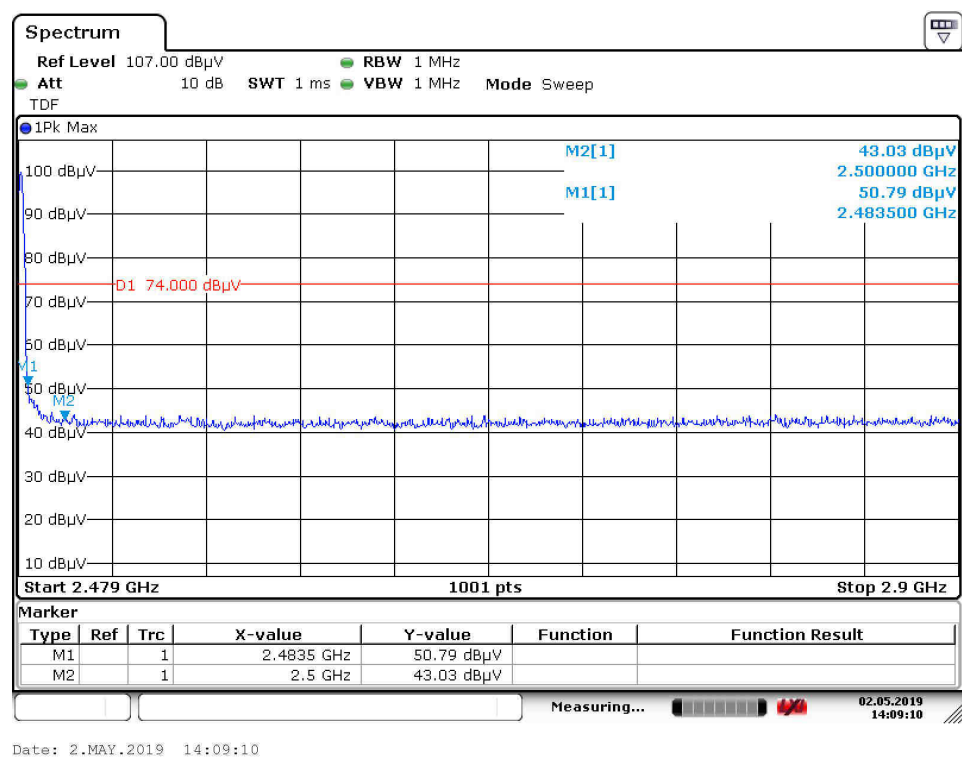

Spurious Emissions, Band Edge, 2.35-2.5G


Spurious Emissions, TX Mode, 1-18G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

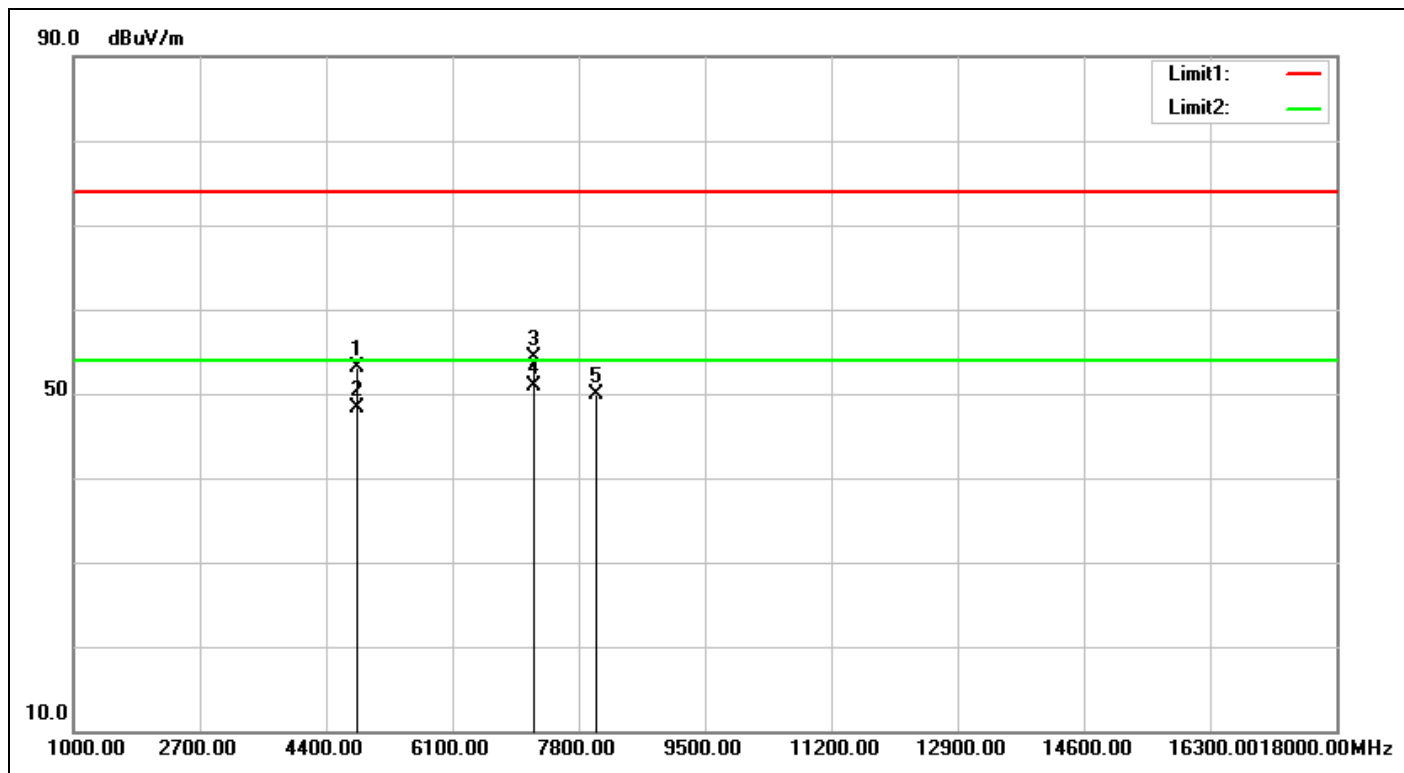

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC Above 1G PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2019/5/2 14:27:34

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%

Model No.: iFinder


Test Engineer: Curry Chen

Test Mode: 2402-TX

Remark: power setting=4dBm

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.64	55.66	53.02	74.00	-20.98	peak	214	216	
2	4804.000	-2.64	50.95	48.31	54.00	-5.69	AVG	214	216	
3	7206.000	5.26	48.99	54.25	74.00	-19.75	peak	212	337	
4	7206.000	5.26	45.74	51.00	54.00	-3.00	AVG	212	337	
5	8038.000	5.79	44.19	49.98	74.00	-24.02	peak	100	320	

Spurious Emissions, TX Mode, 1-18G

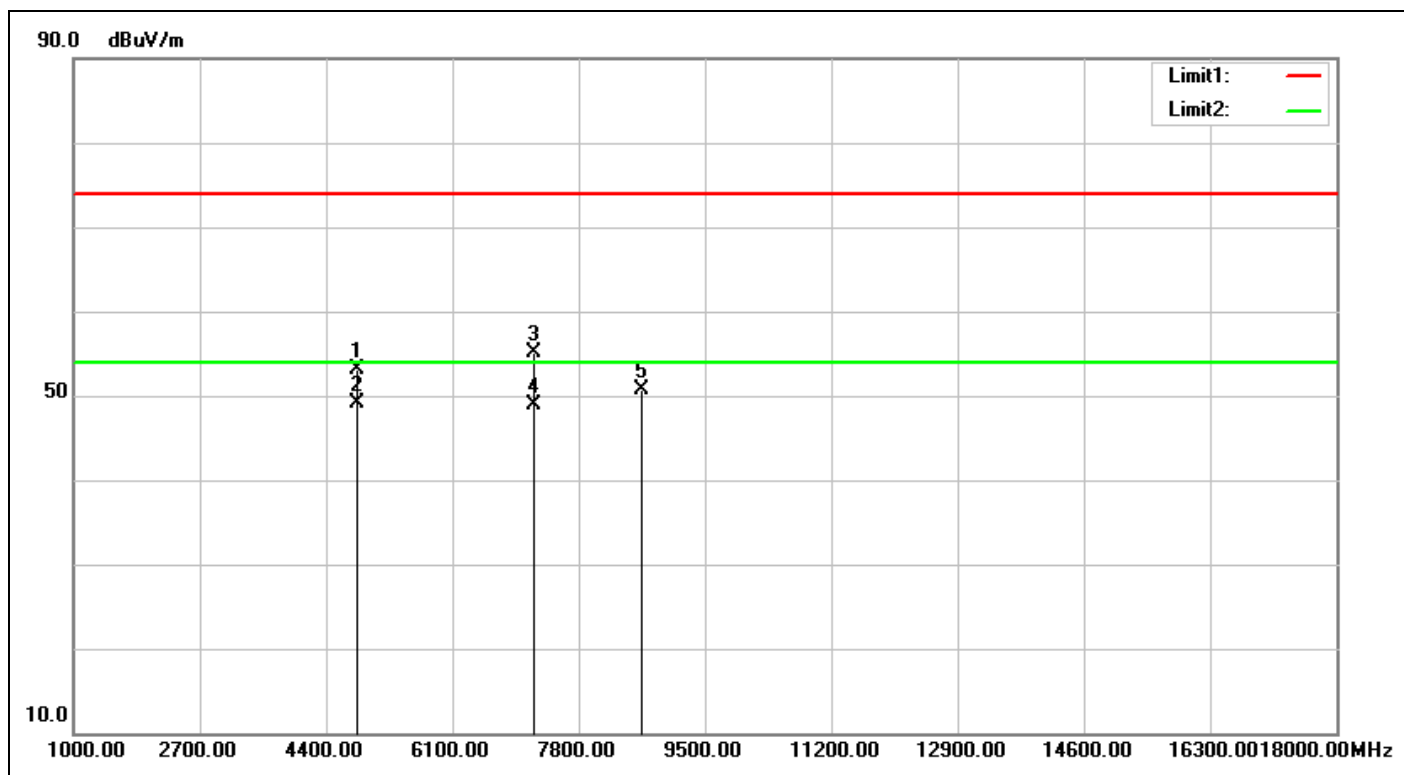

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC Above 1G PEAK

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2019/5/2 14:28:28

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%


Model No.: iFinder

Test Engineer: Curry Chen

Test Mode: 2402-TX


Remark: power setting=4dBm

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.64	55.70	53.06	74.00	-20.94	peak	139	0	
2	4804.000	-2.64	51.80	49.16	54.00	-4.84	AVG	139	0	
3	7206.000	5.26	49.89	55.15	74.00	-18.85	peak	143	10	
4	7206.000	5.26	43.65	48.91	54.00	-5.09	AVG	143	10	
5	8650.000	6.61	44.13	50.74	74.00	-23.26	peak	100	130	

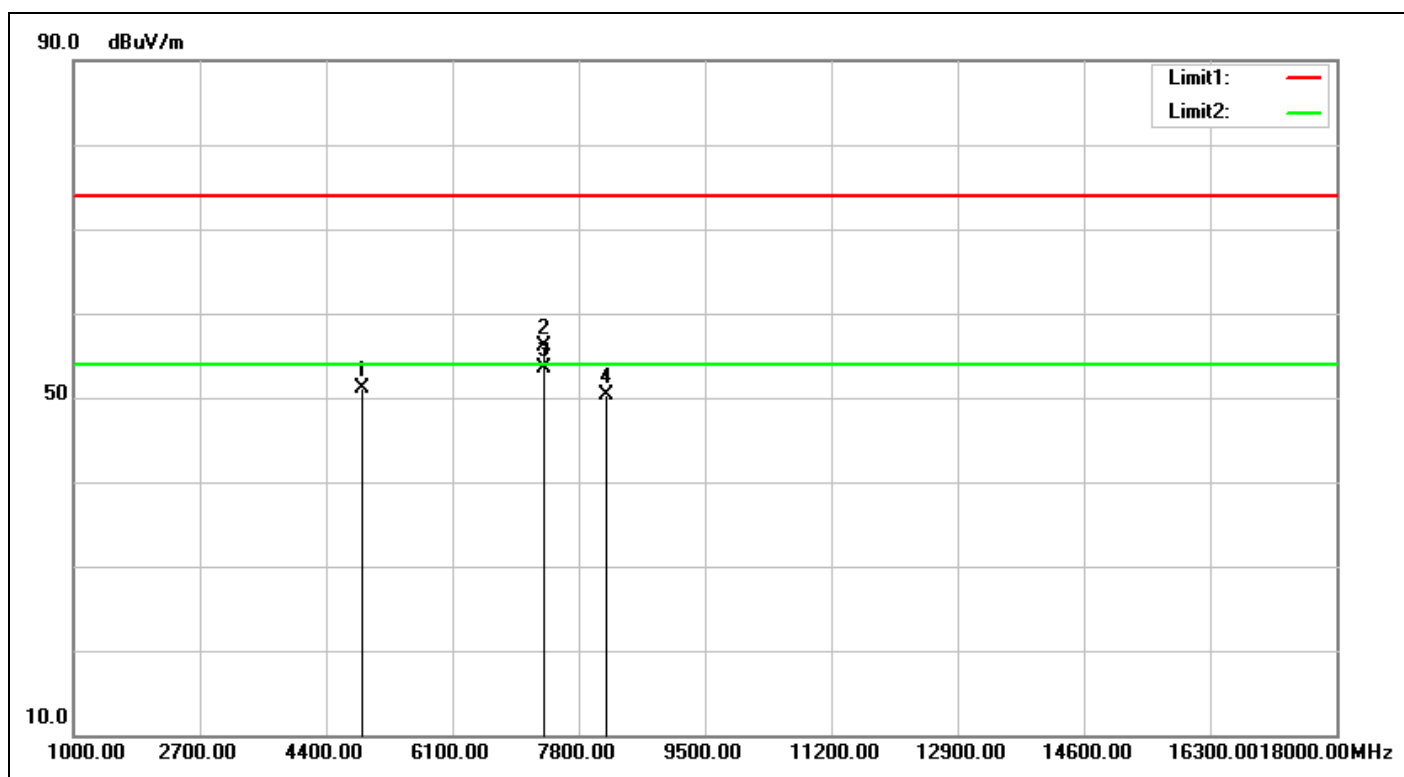


Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/5/2 14:49:09
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%)	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:	power setting=4dBm		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4880.000	-2.45	53.56	51.11	74.00	-22.89	peak	100	219	
2	7320.000	5.54	50.58	56.12	74.00	-17.88	peak	242	340	
3	7320.000	5.54	48.01	53.55	54.00	-0.45	AVG	242	340	
4	8174.000	6.03	44.25	50.28	74.00	-23.72	peak	100	300	

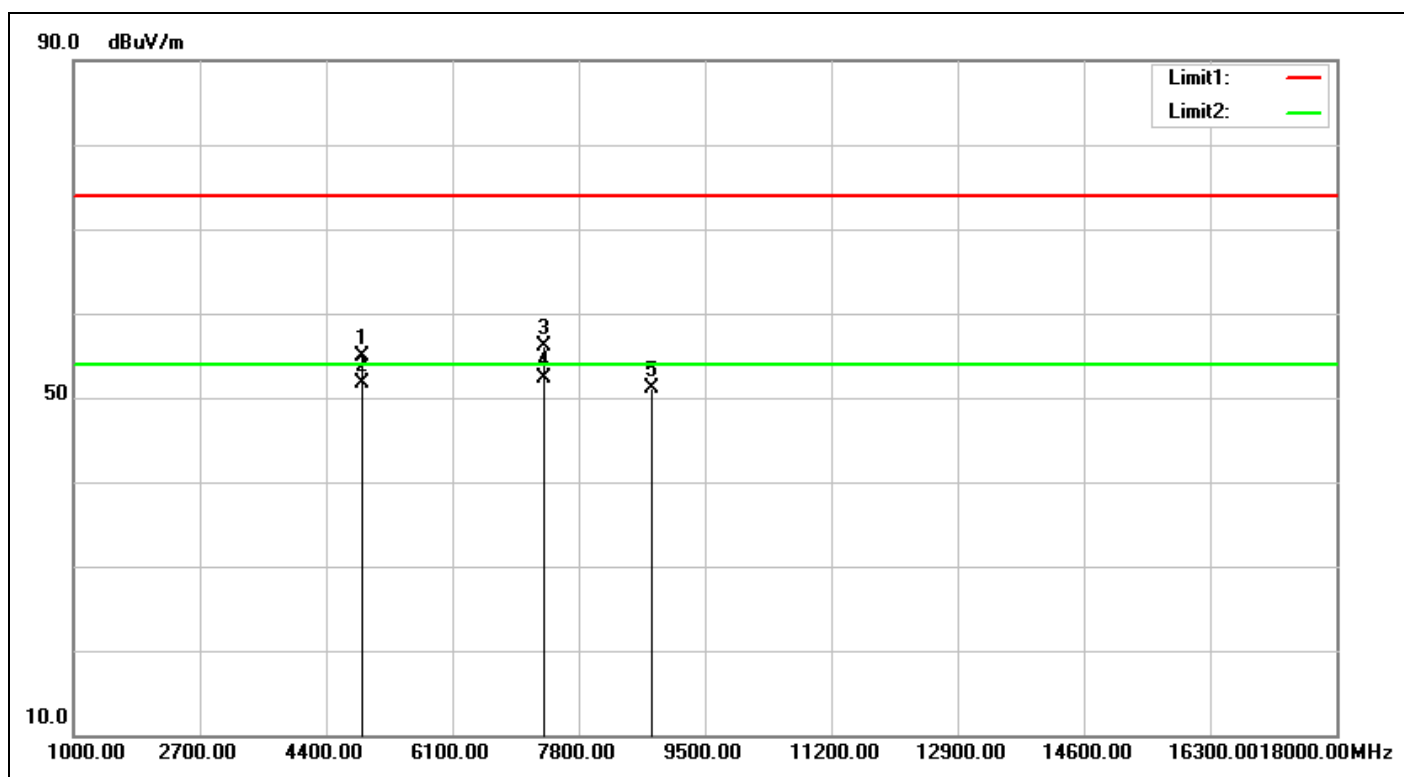


Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/5/2 14:50:03
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%):	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:	power setting=4dBm		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4880.000	-2.45	57.32	54.87	74.00	-19.13	peak	136	32	
2	4880.000	-2.45	54.11	51.66	54.00	-2.34	AVG	136	32	
3	7320.000	5.54	50.55	56.09	74.00	-17.91	peak	120	25	
4	7320.000	5.54	46.83	52.37	54.00	-1.63	AVG	120	25	
5	8786.000	6.61	44.47	51.08	74.00	-22.92	peak	100	59	

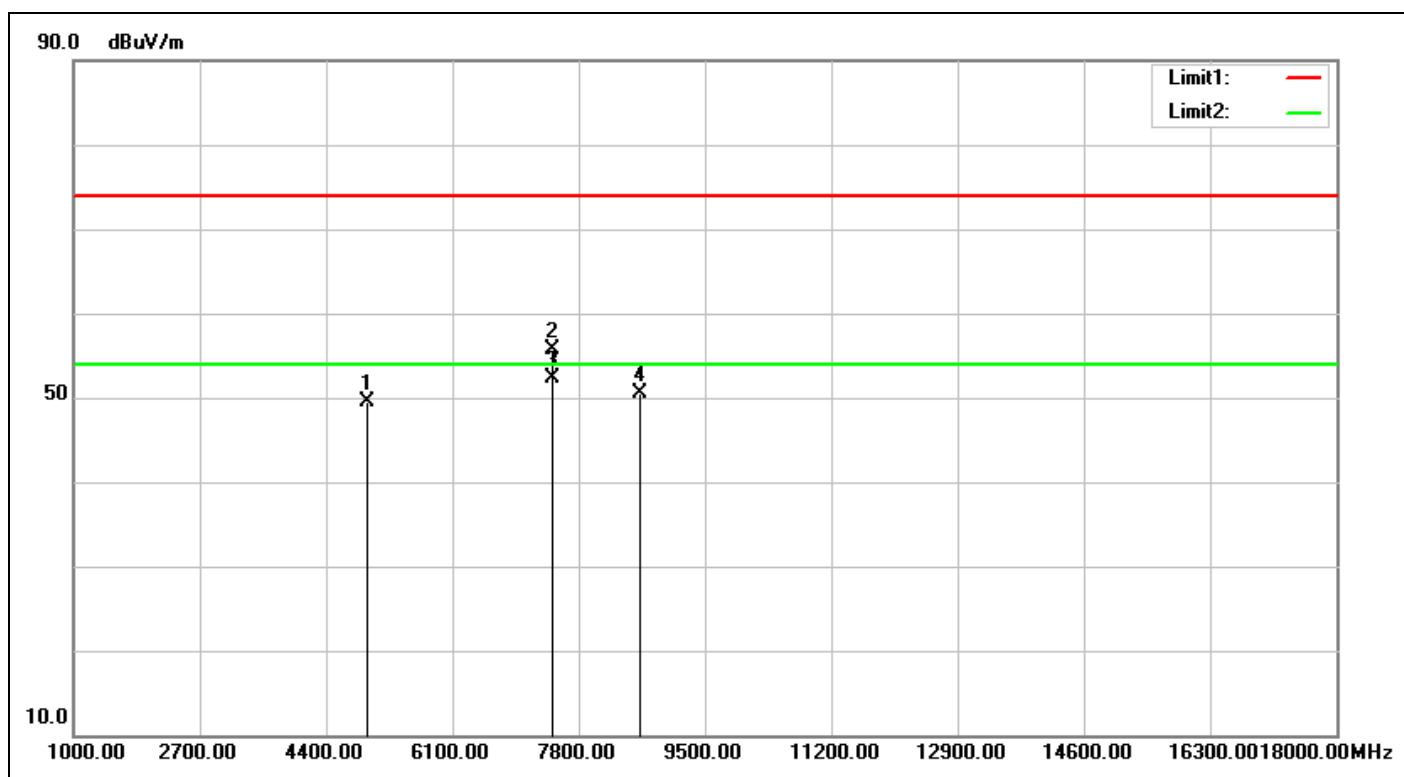

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/5/2 15:05:00
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%):	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2480-TX		
Remark:	power setting=3dBm		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-2.25	51.68	49.43	74.00	-24.57	peak	100	49	
2	7440.000	5.83	49.85	55.68	74.00	-18.32	peak	241	333	
3	7440.000	5.83	46.47	52.30	54.00	-1.70	AVG	241	333	
4	8633.000	6.61	43.84	50.45	74.00	-23.55	peak	100	8	

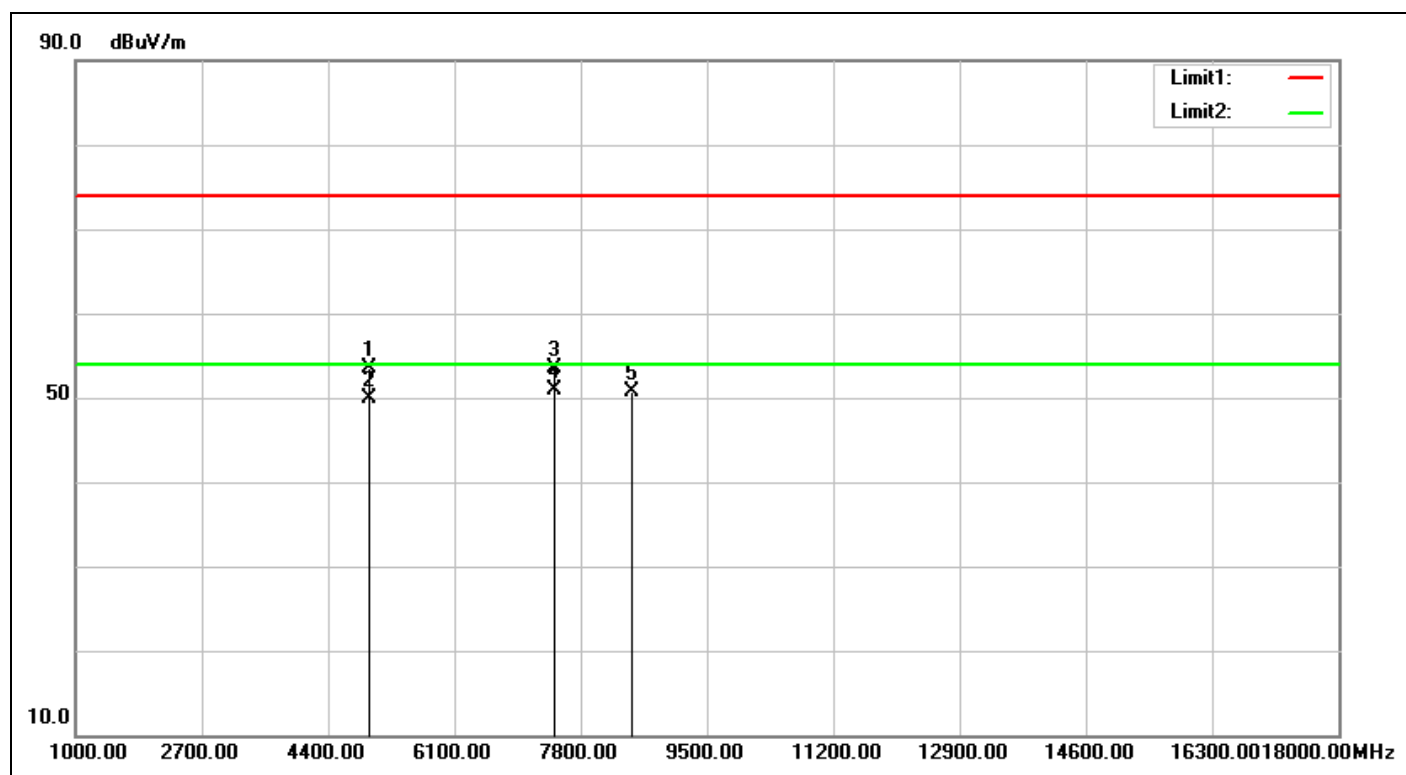

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/5/2 15:05:54
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%):	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2480-TX		
Remark:	power setting=3dBm		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-2.25	55.77	53.52	74.00	-20.48	peak	144	24	
2	4960.000	-2.25	52.24	49.99	54.00	-4.01	AVG	144	24	
3	7440.000	5.83	47.63	53.46	74.00	-20.54	peak	130	13	
4	7440.000	5.83	45.05	50.88	54.00	-3.12	AVG	130	13	
5	8480.000	6.58	44.14	50.72	74.00	-23.28	peak	100	102	


Spurious Emissions, TX Mode, 18-26G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

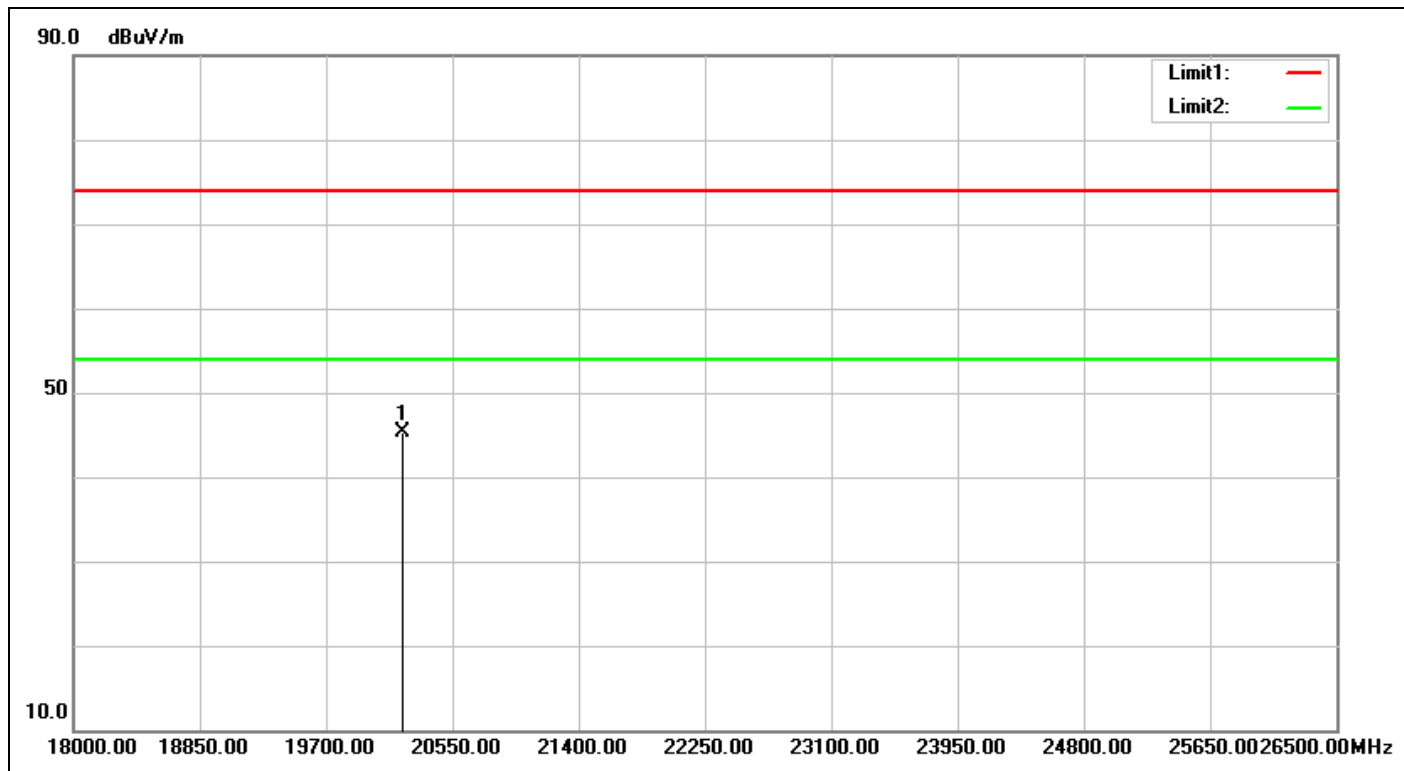

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC Above 1G PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2019/5/2 15:27:06

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%

Model No.: iFinder


Test Engineer: Curry Chen

Test Mode: 2402-TX

Remark: power setting=4dBm


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20218.500	4.45	40.89	45.34	74.00	-28.66	peak	100	65	

Spurious Emissions, TX Mode, 9k-30M

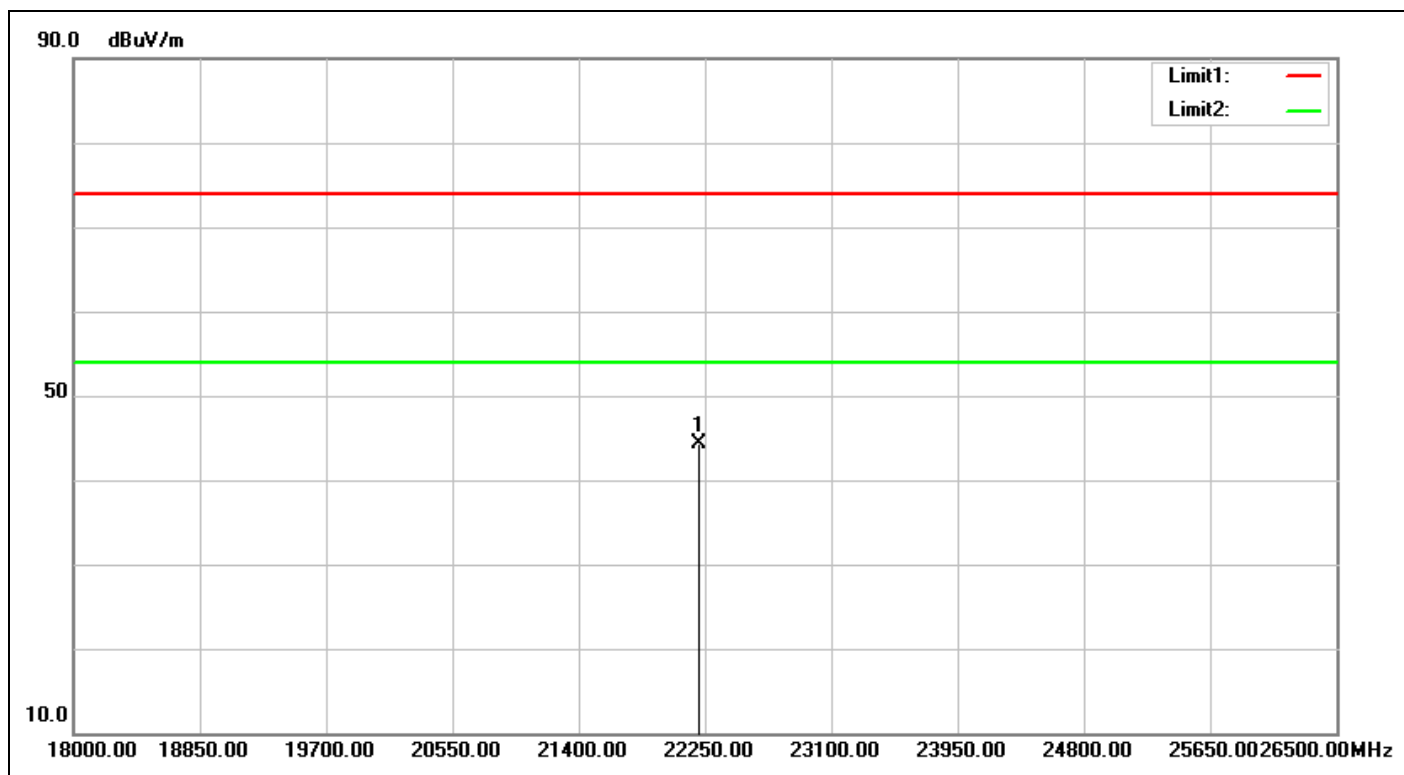

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/5/2 15:27:13
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%):	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2402-TX		
Remark:	power setting=4dBm		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22207.500	4.69	39.63	44.32	74.00	-29.68	peak	100	266	

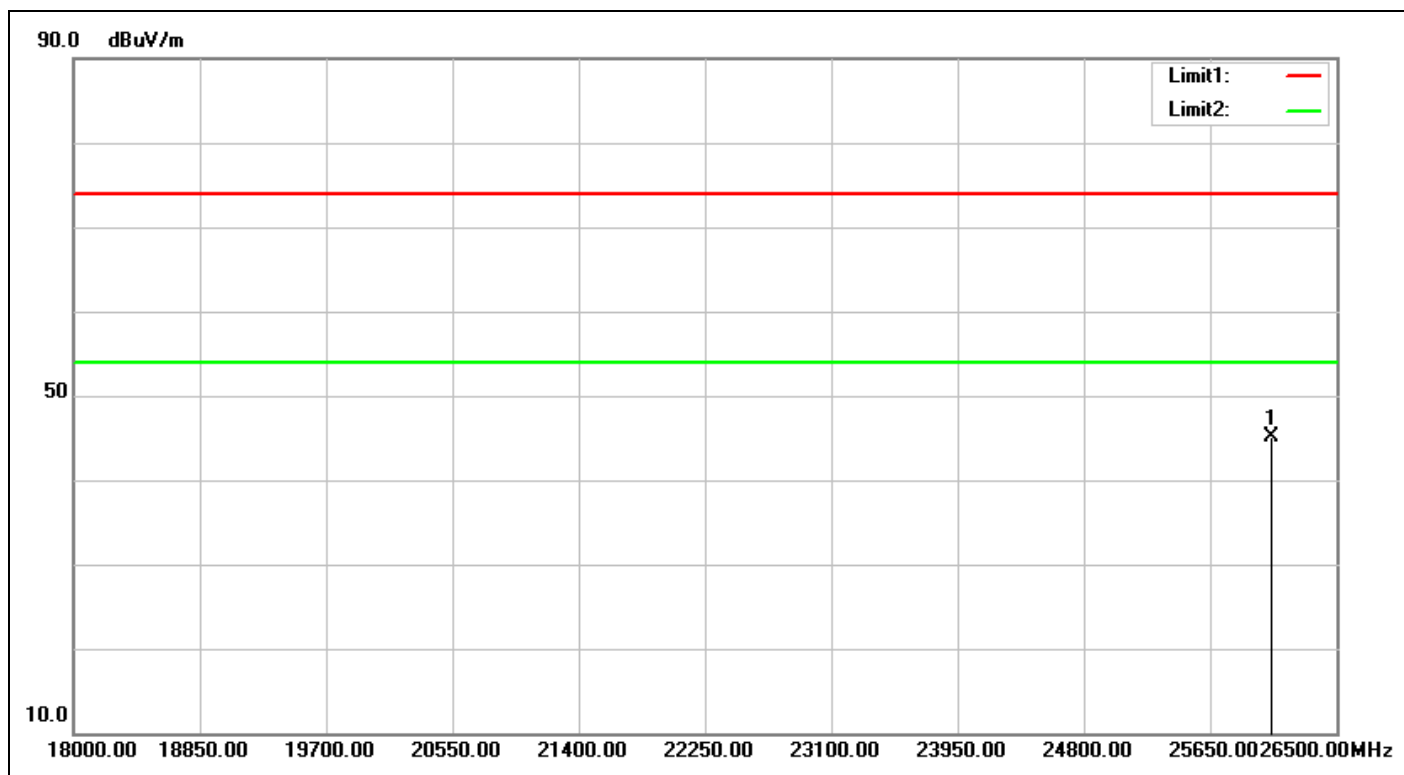

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC Above 1G PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2019/5/2 15:27:46

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%


Model No.: iFinder

Test Engineer: Curry Chen

Test Mode: 2440-TX

Remark: power setting=4dBm

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	26066.500	5.66	39.48	45.14	74.00	-28.86	peak	100	150	

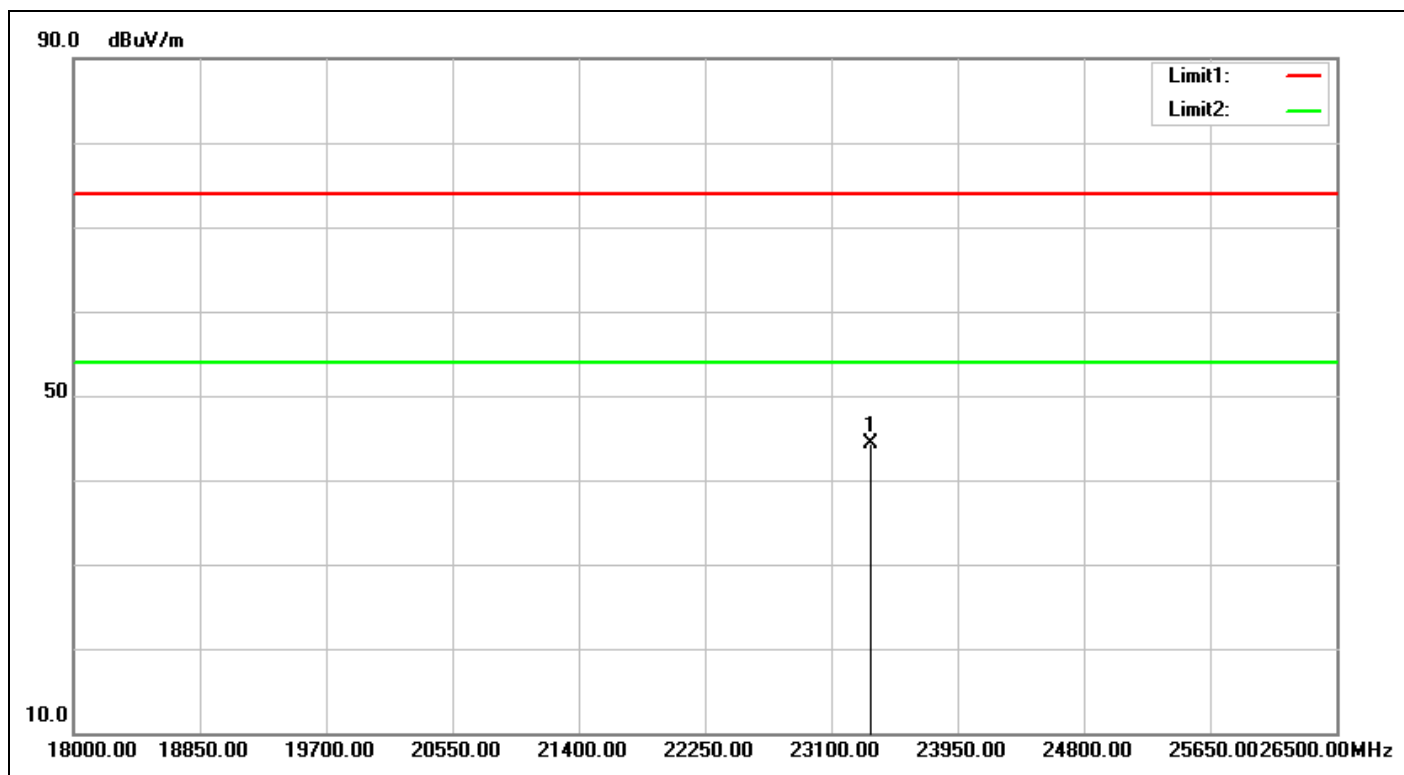

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC Above 1G PEAK

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2019/5/2 15:27:54

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%


Model No.: iFinder

Test Engineer: Curry Chen

Test Mode: 2440-TX


Remark: power setting=4dBm

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23363.500	5.25	39.08	44.33	74.00	-29.67	peak	100	324	

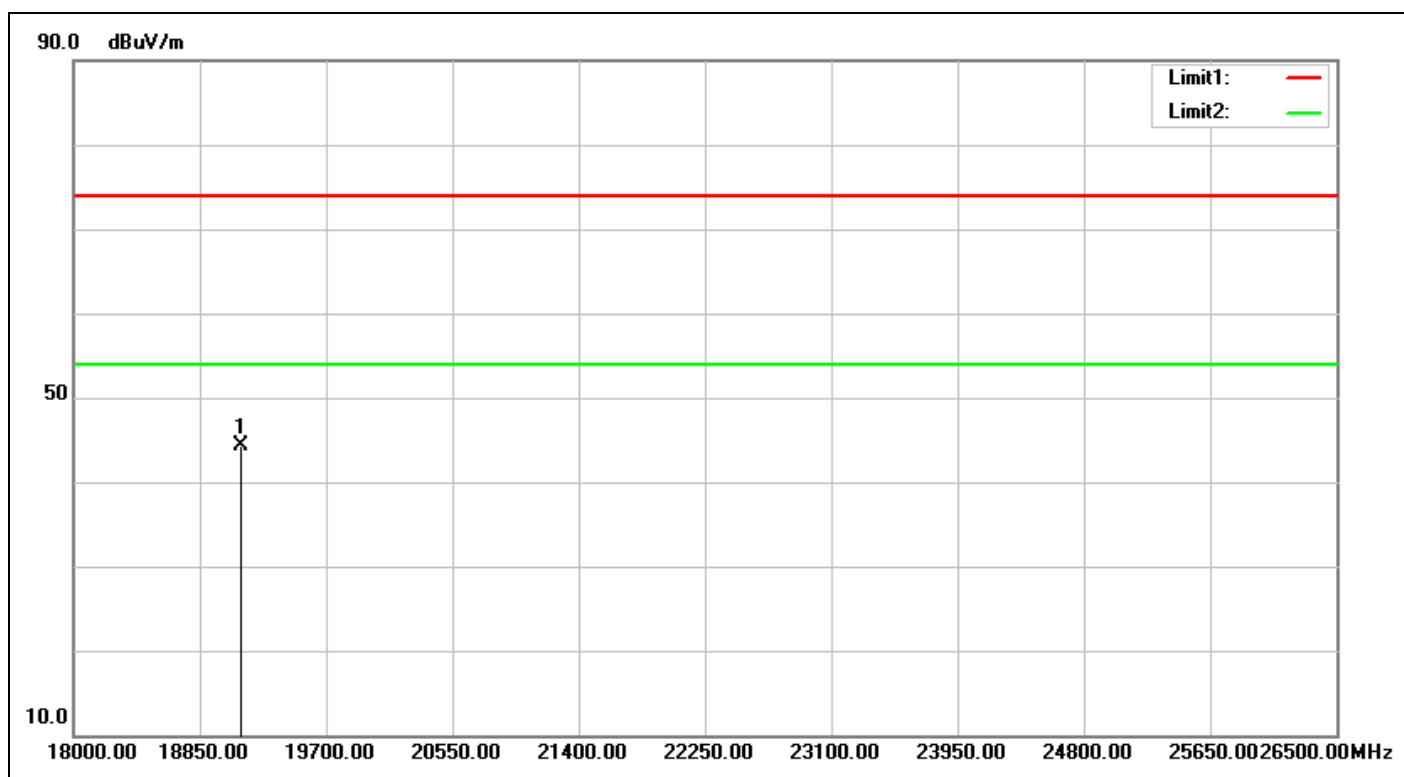

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/5/2 15:28:34
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%):	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2480-TX		
Remark:	power setting=3dBm		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19130.500	3.93	40.33	44.26	74.00	-29.74	peak	100	18	

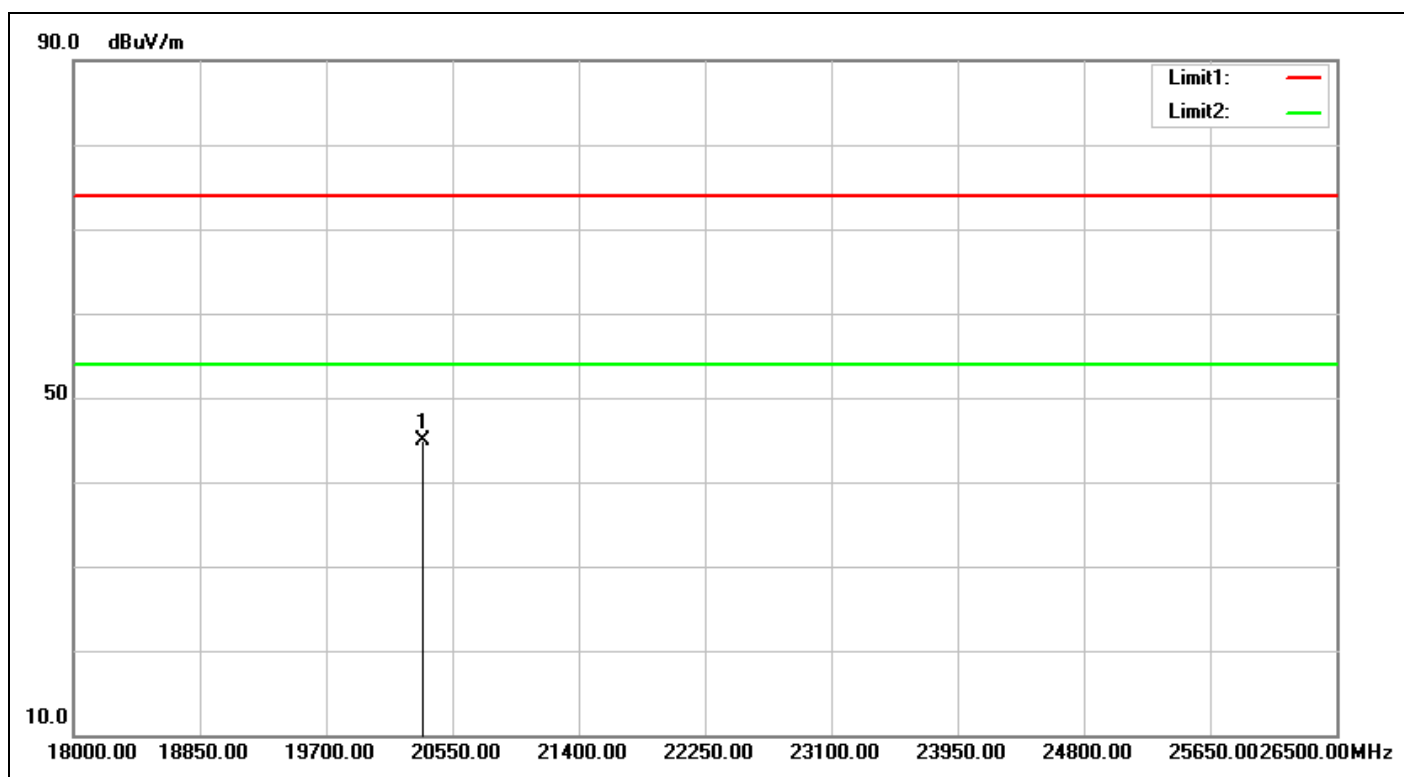

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC Above 1G PEAK

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2019/5/2 15:28:41

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%

Model No.: iFinder

Test Engineer: Curry Chen

Test Mode: 2480-TX

Remark: power setting=3dBm

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20354.500	4.39	40.47	44.86	74.00	-29.14	peak	100	299	


Spurious Emissions, TX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

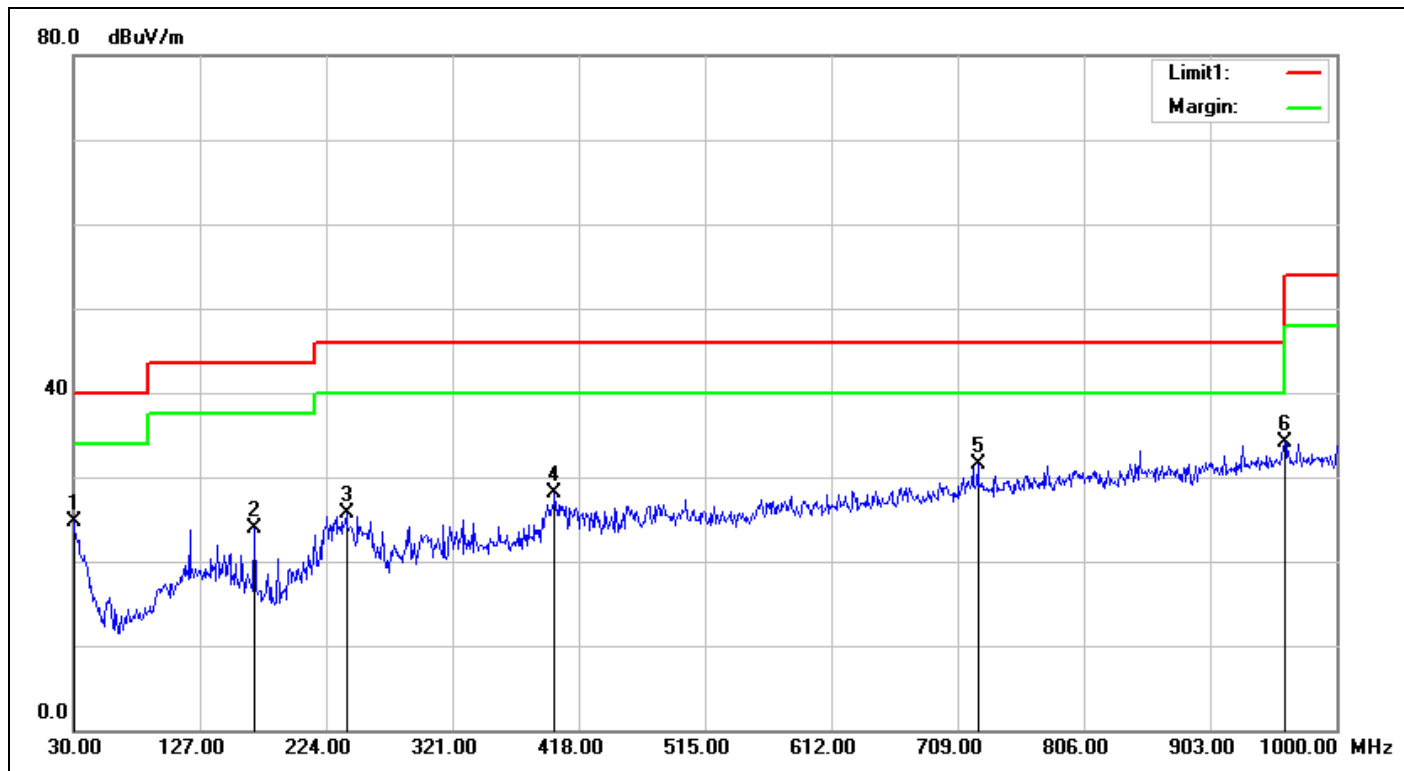

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC Class B 3M Radiation

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2019/5/2 15:52:24

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%

Model No.: iFinder


Test Engineer: Curry Chen

Test Mode: 2440-TX

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.03	24.81	24.78	40.00	-15.22	QP	100	196	
2	168.7100	-8.84	32.78	23.94	43.50	-19.56	QP	100	127	
3	239.5200	-6.78	32.41	25.63	46.00	-20.37	QP	100	64	
4	399.5700	-2.33	30.51	28.18	46.00	-17.82	QP	100	315	
5	724.5200	1.81	29.73	31.54	46.00	-14.46	QP	100	285	
6	960.2300	5.94	28.09	34.03	54.00	-19.97	QP	100	104	

Spurious Emissions, TX Mode, 9k-30M

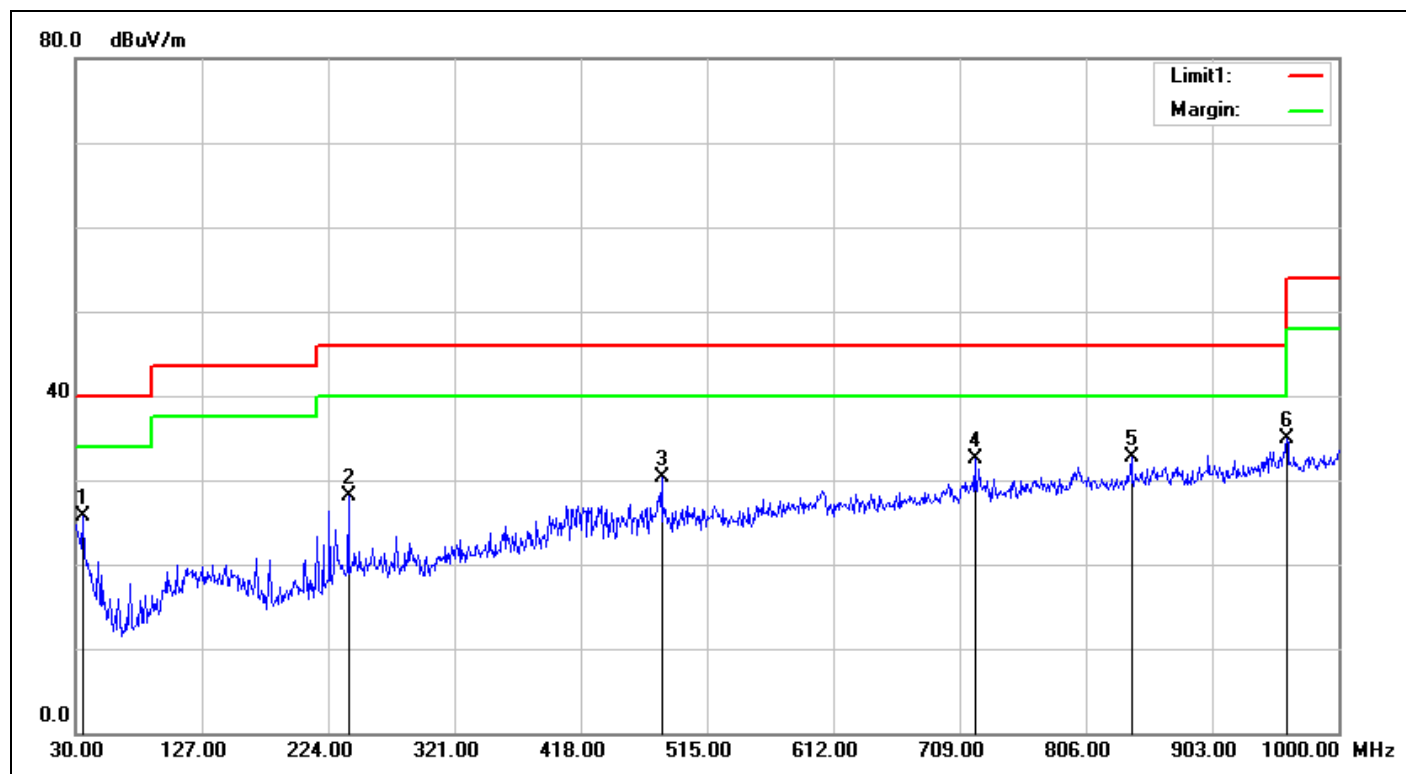

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/5/2 15:53:17
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%)	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	35.8200	-3.37	29.06	25.69	40.00	-14.31	QP	100	289	
2	239.5200	-6.78	34.82	28.04	46.00	-17.96	QP	100	306	
3	480.0800	-1.52	31.74	30.22	46.00	-15.78	QP	100	322	
4	720.6400	1.73	30.83	32.56	46.00	-13.44	QP	100	0	
5	840.9200	3.76	28.86	32.62	46.00	-13.38	QP	100	193	
6	960.2300	5.94	28.93	34.87	54.00	-19.13	QP	100	236	


Spurious Emissions, TX Mode, 9k-30M



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

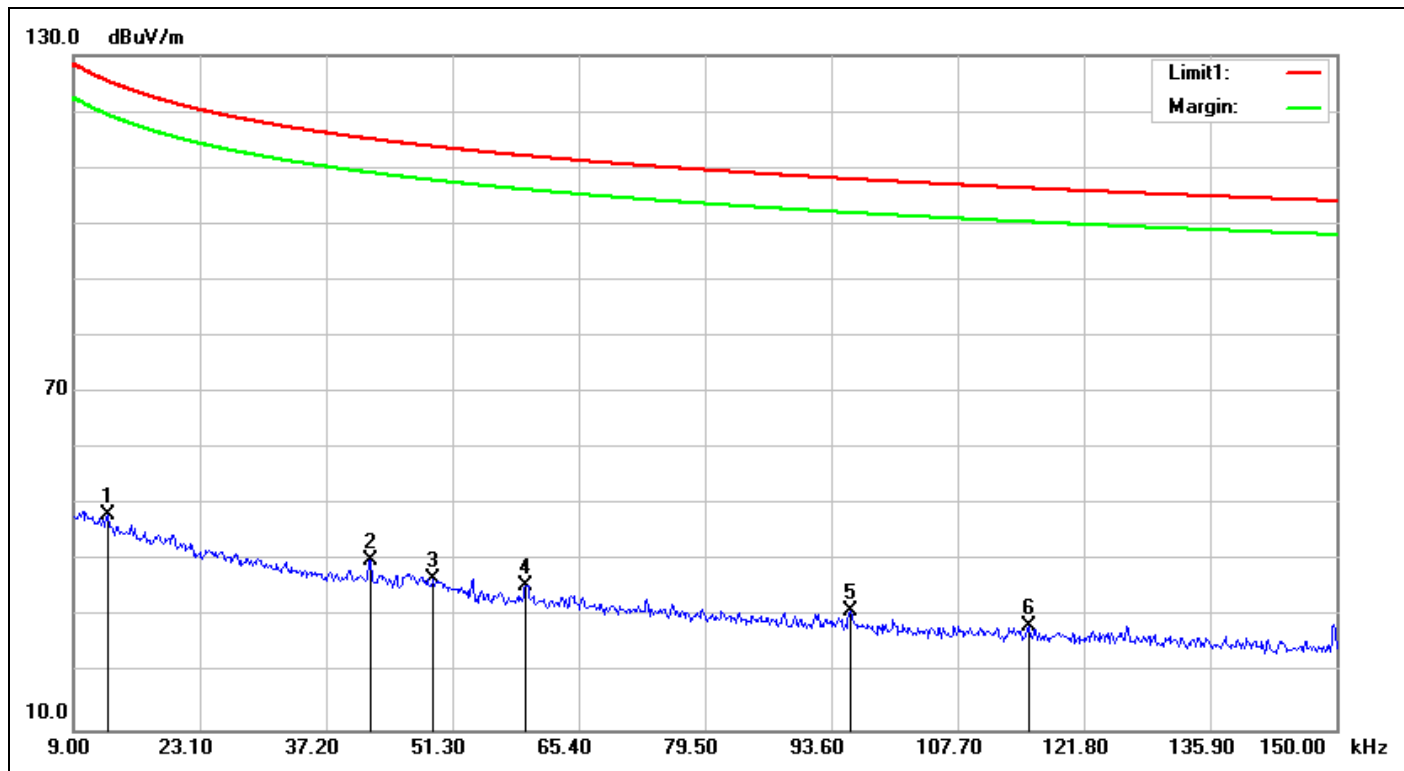

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC2.8_9k-1G_3m

Ant. Polarization:

Test item: Radiation Emission

Test Time: 2019/5/2 16:17:27

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%

Model No.: iFinder


Test Engineer: Curry Chen

Test Mode: 2440-TX

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0128	18.63	29.72	48.35	125.44	-77.09	QP	100	197	
2	0.0421	19.08	21.14	40.22	115.11	-74.89	QP	100	75	
3	0.0491	18.94	18.01	36.95	113.77	-76.82	QP	100	75	
4	0.0594	18.81	16.78	35.59	112.12	-76.53	QP	100	167	
5	0.0957	18.38	12.65	31.03	107.98	-76.95	QP	100	183	
6	0.1155	18.34	10.18	28.52	106.35	-77.83	QP	100	247	

Spurious Emissions, TX Mode, 9k-30M

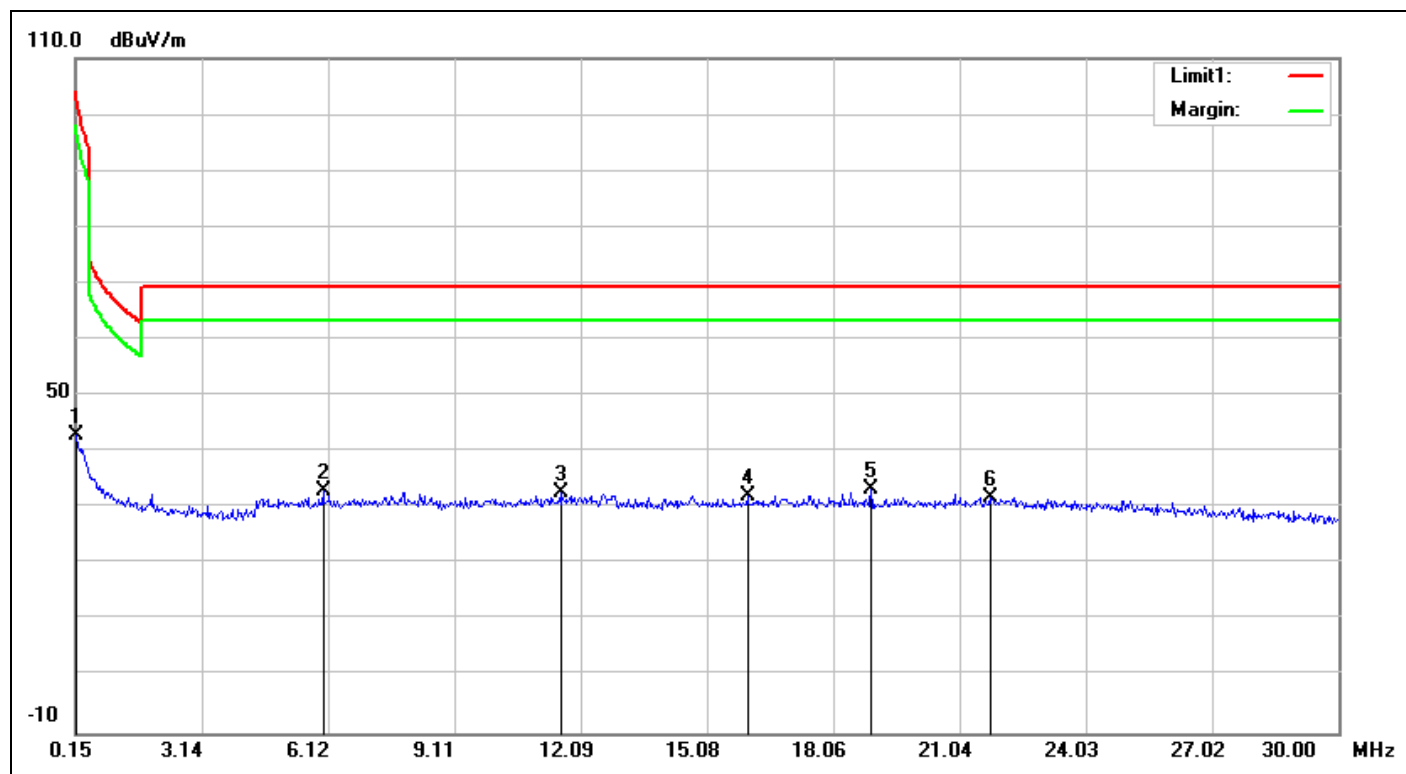

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2019/5/2 16:20:14
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%)	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1798	18.37	24.60	42.97	102.50	-59.53	QP	100	59	
2	6.0006	19.66	13.30	32.96	69.50	-36.54	QP	100	76	
3	11.6422	20.63	12.09	32.72	69.50	-36.78	QP	100	134	
4	16.0302	21.14	11.07	32.21	69.50	-37.29	QP	100	204	
5	18.9555	21.49	11.79	33.28	69.50	-36.22	QP	100	355	
6	21.7613	21.67	10.22	31.89	69.50	-37.61	QP	100	4	


Spurious Emissions, RX Mode, 1-18G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

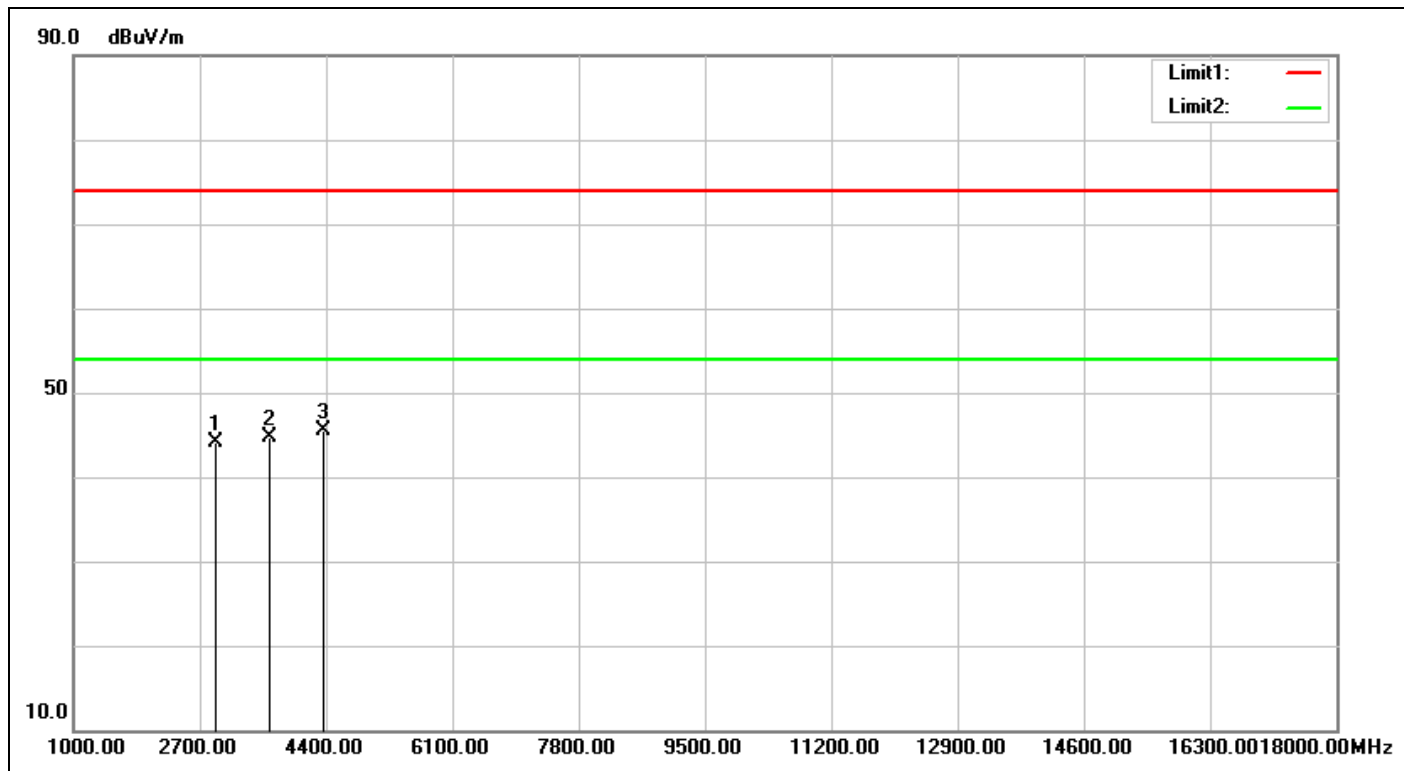

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/5/2 15:14:05
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%)	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2904.000	-7.42	51.45	44.03	74.00	-29.97	peak	100	343	
2	3635.000	-6.56	51.27	44.71	74.00	-29.29	peak	100	175	
3	4366.000	-4.37	49.83	45.46	74.00	-28.54	peak	100	264	

Spurious Emissions, RX Mode, 18-26G

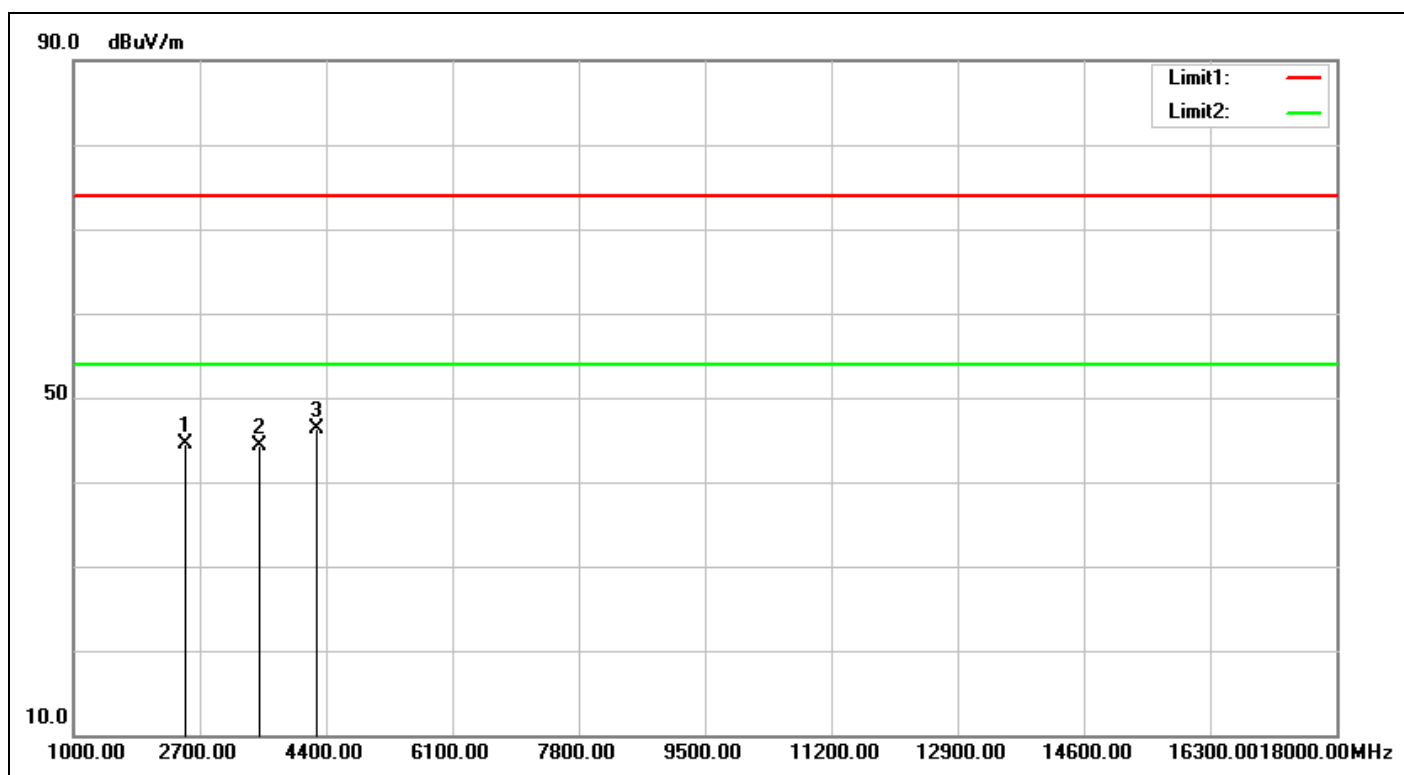

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/5/2 15:14:58
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%):	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2513.000	-8.07	52.50	44.43	74.00	-29.57	peak	100	349	
2	3499.000	-6.87	51.14	44.27	74.00	-29.73	peak	100	328	
3	4264.000	-4.76	51.07	46.31	74.00	-27.69	peak	100	27	


Spurious Emissions, RX Mode, 18-26G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

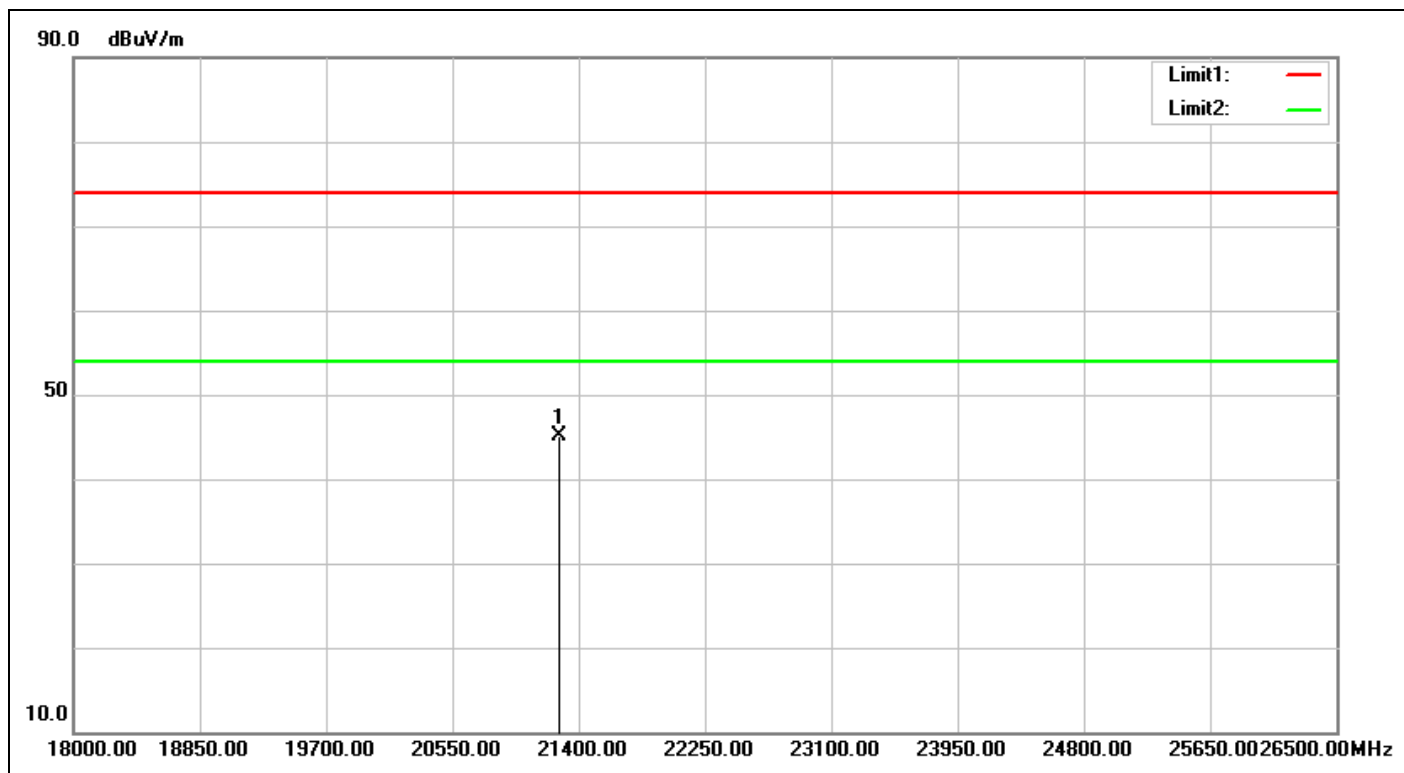

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/5/2 15:29:22
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%):	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21264.000	4.65	40.38	45.03	74.00	-28.97	peak	100	333	

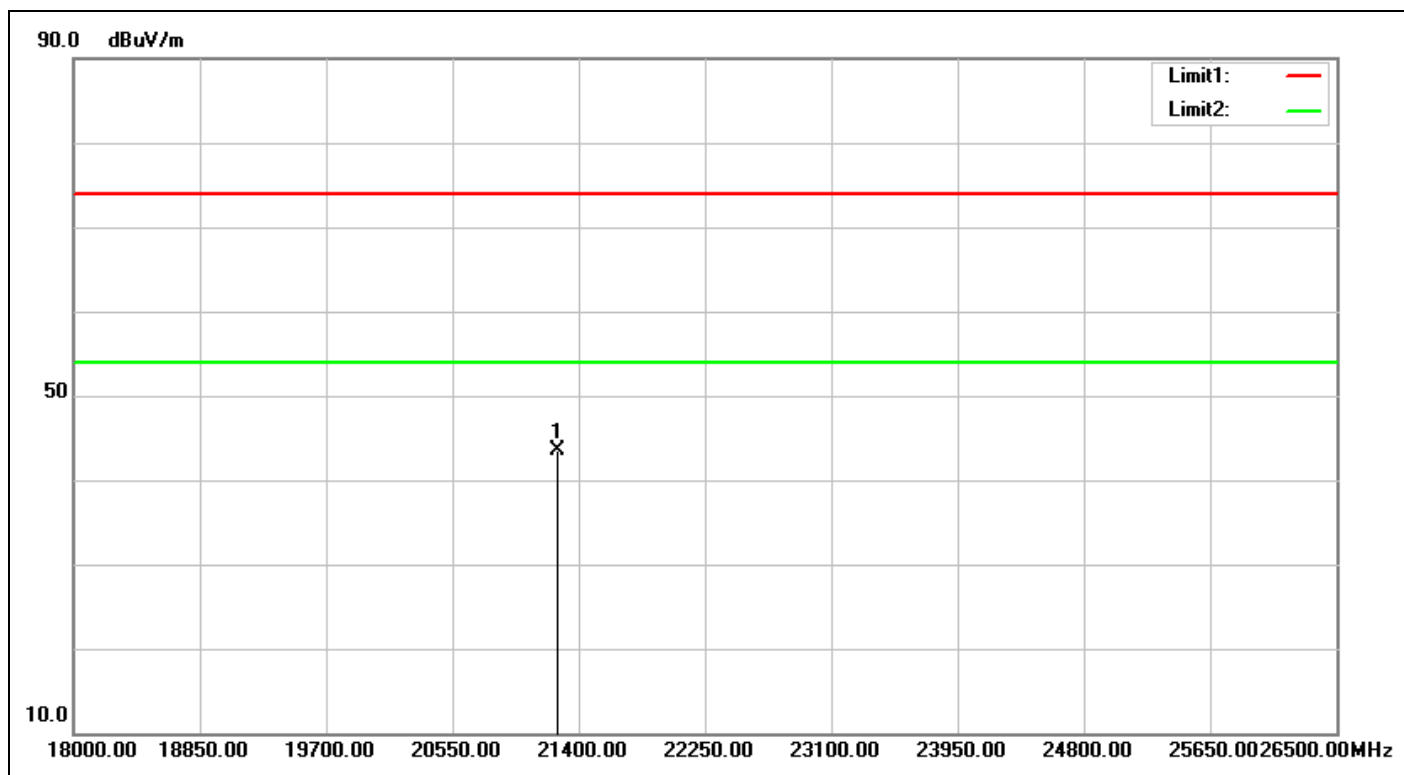

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC Above 1G PEAK

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2019/5/2 15:29:29

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%

Model No.: iFinder

Test Engineer: Curry Chen

Test Mode: 2440-RX

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21255.500	4.65	38.89	43.54	74.00	-30.46	peak	100	198	


Spurious Emissions, RX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

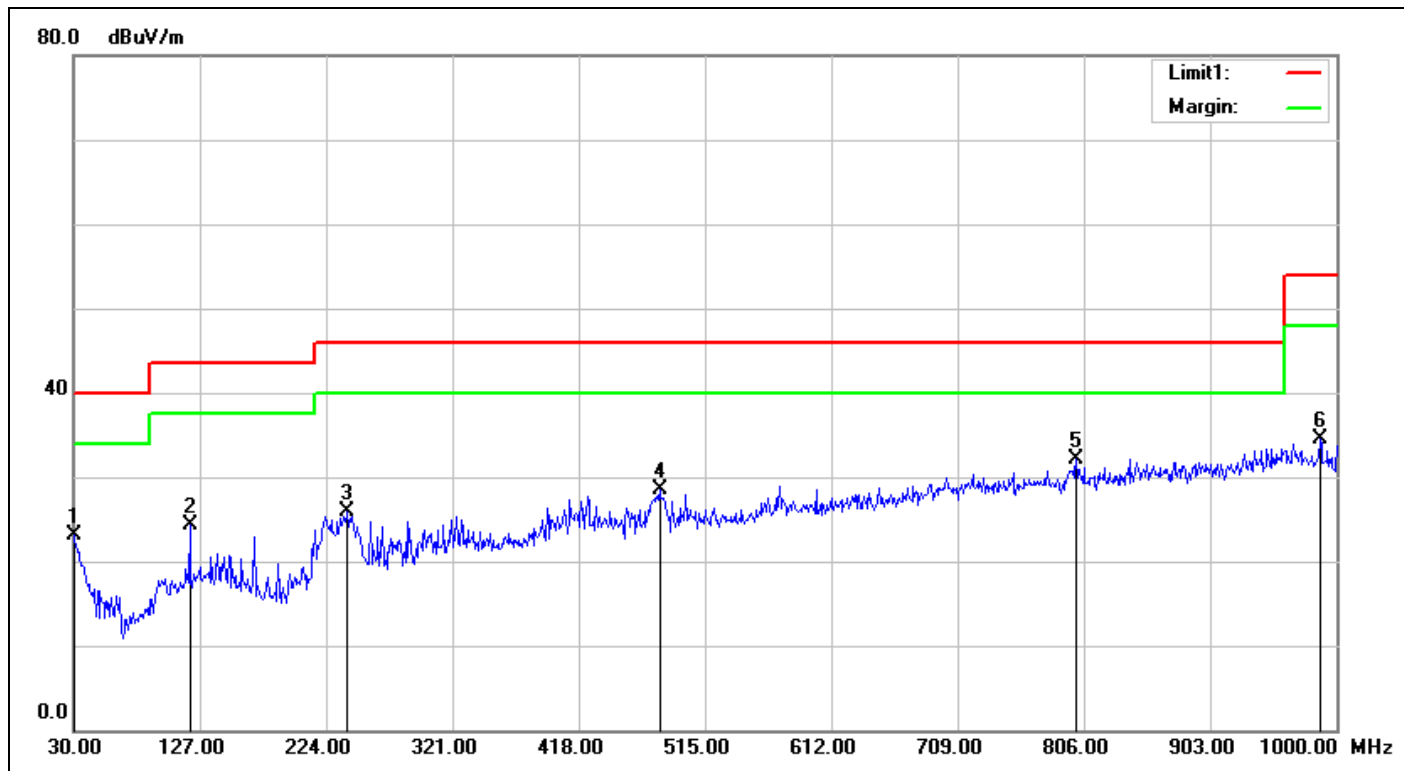

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC Class B 3M Radiation

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2019/5/2 15:59:15

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%

Model No.: iFinder


Test Engineer: Curry Chen

Test Mode: 2440-RX

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.03	23.17	23.14	40.00	-16.86	QP	100	295	
2	119.2400	-7.46	31.67	24.21	43.50	-19.29	QP	100	88	
3	240.4900	-6.68	32.61	25.93	46.00	-20.07	QP	100	123	
4	480.0800	-1.52	29.96	28.44	46.00	-17.56	QP	100	275	
5	800.1799	3.12	28.98	32.10	46.00	-13.90	QP	100	22	
6	987.3900	5.89	28.52	34.41	54.00	-19.59	QP	100	318	

Spurious Emissions, RX Mode, 30M-1G

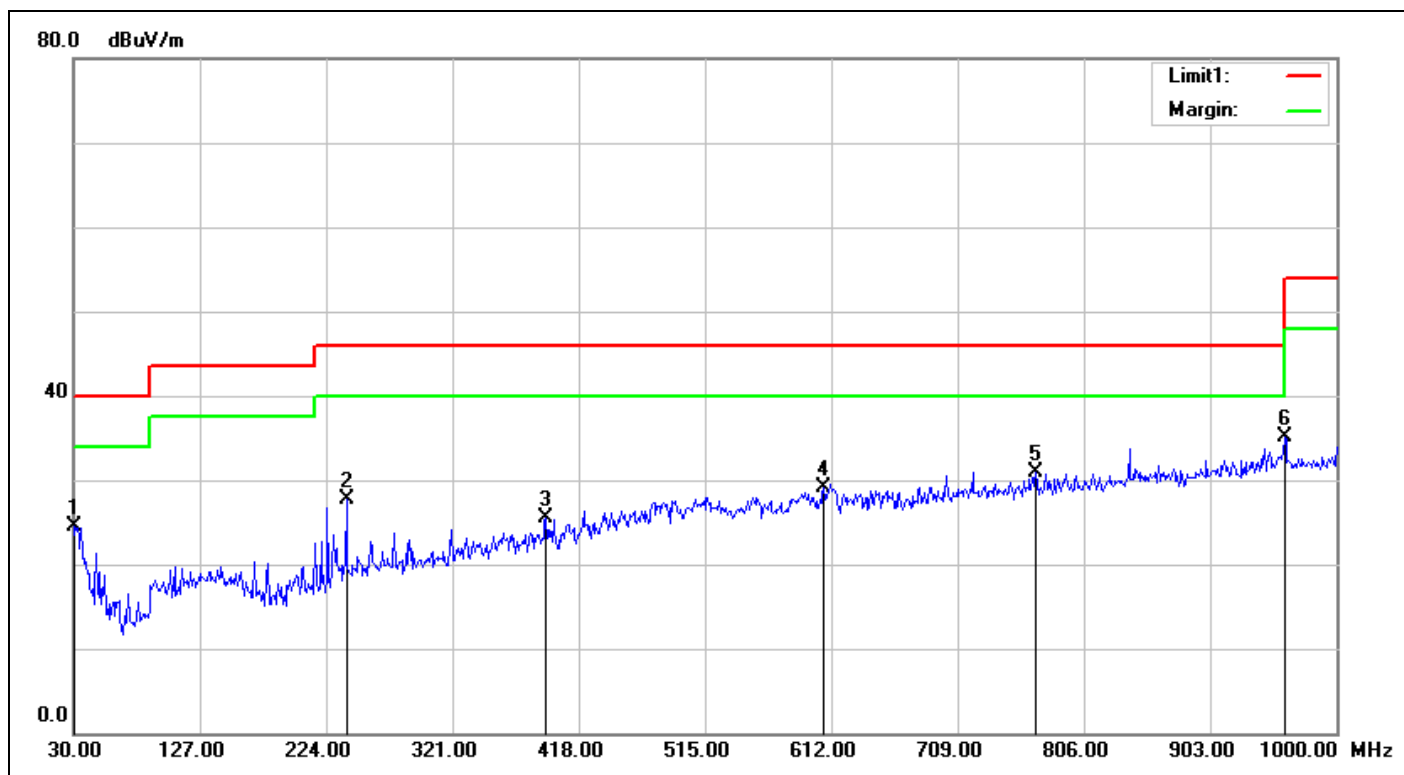

Service No.: 238102779(iFinder)_NCC_LE

Test Distance: 3m

Test Standard: NCC Class B 3M Radiation

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2019/5/2 16:00:09

Applicant: Tekwork

Test Rating: DC 3V

Product: 藍芽尋物器

Temp.(°C)/Hum.(%): 18.8(°C)/67%

Model No.: iFinder

Test Engineer: Curry Chen

Test Mode: 2440-RX

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.03	24.52	24.49	40.00	-15.51	QP	100	125	
2	239.5200	-6.78	34.42	27.64	46.00	-18.36	QP	100	280	
3	392.7800	-2.65	28.13	25.48	46.00	-20.52	QP	100	210	
4	606.1800	0.23	28.86	29.09	46.00	-16.91	QP	100	158	
5	769.1400	2.74	28.13	30.87	46.00	-15.13	QP	100	221	
6	960.2300	5.94	29.24	35.18	54.00	-18.82	QP	100	240	


Spurious Emissions, RX Mode, 9K-30M



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

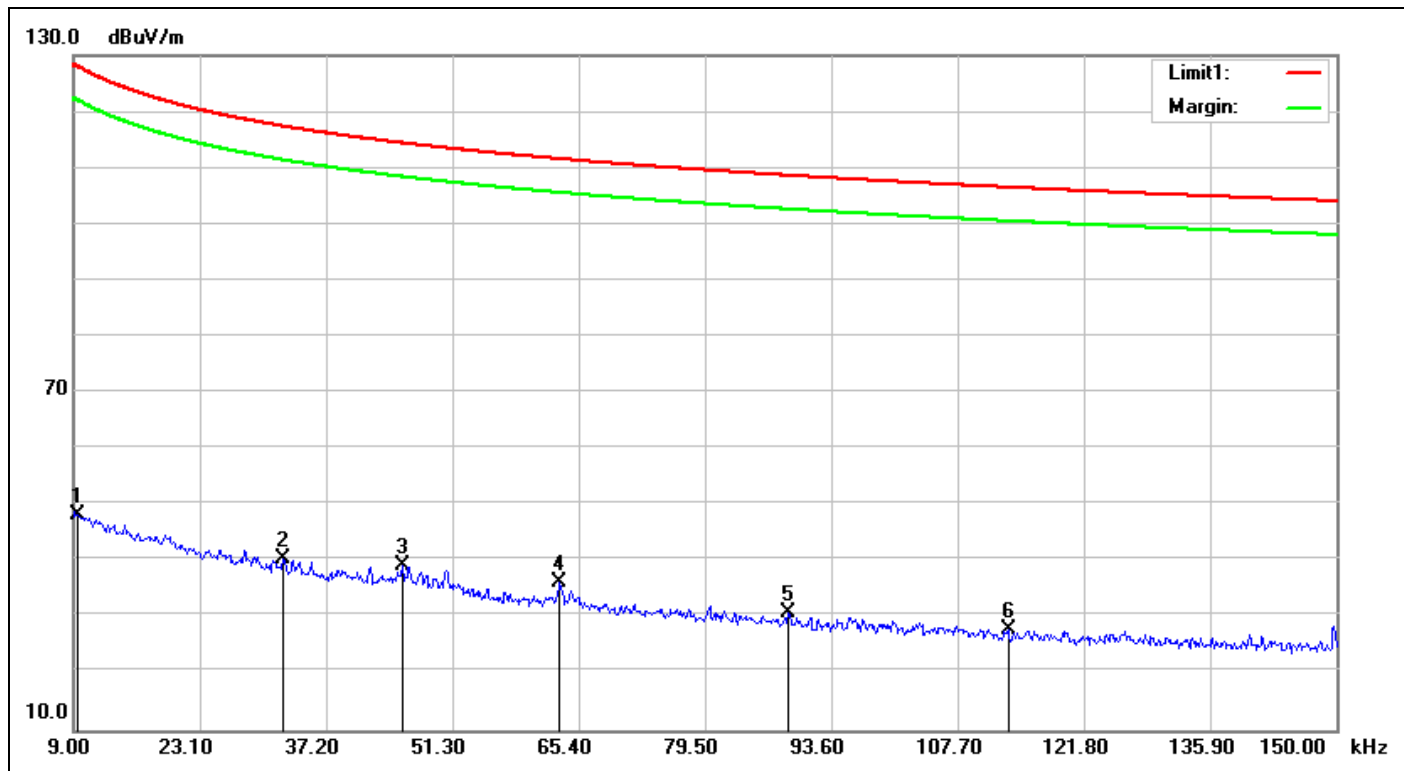

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2019/5/2 16:18:20
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%)	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0094	18.40	30.00	48.40	128.12	-79.72	QP	100	29	
2	0.0324	19.27	21.19	40.46	117.38	-76.92	QP	100	318	
3	0.0458	19.00	20.22	39.22	114.38	-75.16	QP	100	58	
4	0.0633	18.76	17.62	36.38	111.57	-75.19	QP	100	355	
5	0.0888	18.45	12.28	30.73	108.63	-77.90	QP	100	351	
6	0.1133	18.34	9.37	27.71	106.51	-78.80	QP	100	355	

Spurious Emissions, RX Mode, 30M-1G

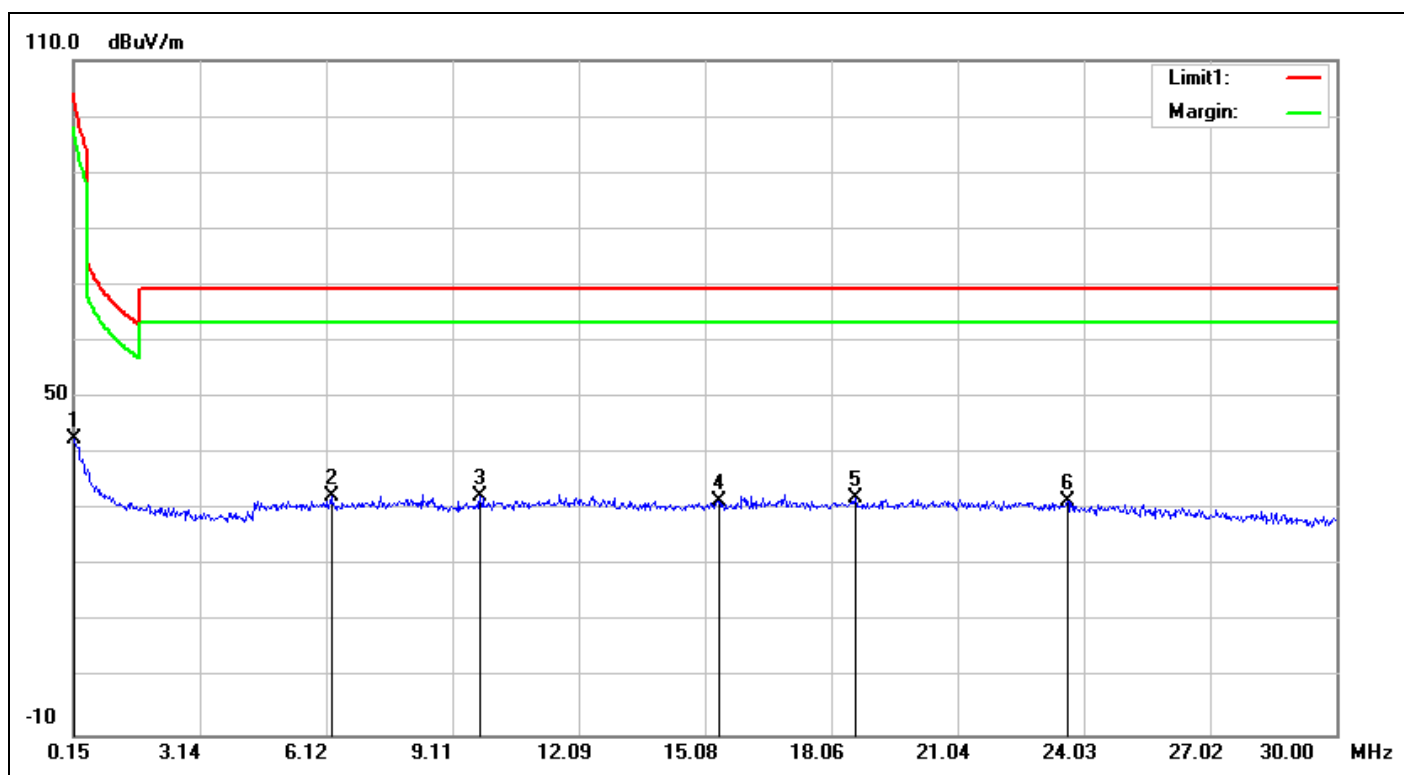

Service No.:	238102779(iFinder)_NCC_LE	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2019/5/2 16:21:07
Applicant:	Tekwork	Test Rating:	DC 3V
Product:	藍芽尋物器	Temp.(°C)/Hum.(%)	18.8(°C)/67%
Model No.:	iFinder	Test Engineer:	Curry Chen
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1799	18.37	24.39	42.76	102.50	-59.74	QP	100	360	
2	6.2394	19.71	12.74	32.45	69.50	-37.05	QP	100	344	
3	9.7617	20.40	12.12	32.52	69.50	-36.98	QP	100	117	
4	15.4034	21.07	10.60	31.67	69.50	-37.83	QP	100	68	
5	18.6272	21.45	10.82	32.27	69.50	-37.23	QP	100	327	
6	23.6420	21.74	9.93	31.67	69.50	-37.83	QP	100	295	