

Japan Specified Radio Test Report

Report No. : 9812C60005112501

Applicant : KIBU Inc.

Address : KIBU Inc., 38-3 Kamiyasumatsu,
Tokorozawa-shi, Saitama 359-0025, JP

Product Name : Wireless Mechanical Keyboard

Report Date : 2026-08-04

Shenzhen Anbotek Compliance Laboratory Limited



Shenzhen Anbotek Compliance Laboratory Limited

Code:AB-RF-05-b

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park,
Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Tel: (86) 0755-26066440 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	9
1.4. Description of Test Configuration	9
1.5. Test Conditions	9
1.6. Test Voltage	10
1.7. Test Equipment List	11
1.8. Description of Test Facility	12
1.9. Disclaimer	12
1.10. Measurement Uncertainty	13
2. Summary of Test Results	14
3. Frequency Tolerance Test	15
3.1. Test Limit	15
3.2. Test Setup	15
3.3. Test Procedure	15
3.4. Test Data	15
4. Antenna Power Test	16
4.1. Test Limit	16
4.2. Test Setup	16
4.3. Test Configuration	16
4.4. Test Data	16
5. Occupied Bandwidth (99%) Test	17
5.1. Test Limit	17
5.2. Test Setup	17
5.3. Test Procedure	17
5.4. Test Data	17
6. Spurious Emissions Intensity Test	18
6.1. Test Limit	18
6.2. Test Setup	18
6.3. Test Procedure	18
6.4. Test Data	18
7. Interference prevention function	19
7.1. Test Limit	19
7.2. Test Setup	19
7.3. Test Configuration	19
7.4. Test Data	19
8. Secondary Radiated Emissions Test	20
8.1. Test Limit	20
8.2. Test Setup	20



8.3. Test Configuration	20
8.4. Test Data	20
APPENDIX I -- TEST SETUP PHOTOGRAPH	21
APPENDIX II -- EXTERNAL PHOTOGRAPH	21
APPENDIX III -- INTERNAL PHOTOGRAPH	21



TEST REPORT

Applicant : KIBU Inc.

Manufacturer : Huizhou Huami Intelligent Technology Co., Ltd

Product Name : Wireless Mechanical Keyboard

Model No. : K104 JIS, K104 ANSI, K104, K104 ISO, K104 Mac, K104 Lite, K104 Standard, K104 Color, K104 Plus, K104 Pro, K104 Ultra, K104 Silent, K104 Limited, K104 HE, K104 RT

Trade Mark : N/A

Rating(s) : Input: 5V= 492MA, 2.46W(with DC 3.7V, 8000mAh Battery inside)

Test Standard(s) : MIC Notice No.88 Appendix No.43
Article 2, paragraph 1, item 19

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the MIC Notice No.88 Appendix No.43 and Certificate regulation article 2, paragraph 1, item 19 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

2026-07-10

Date of Test

2026-07-10 to 2026-07-21

Prepared By

Polly Mo

(Polly Mo)

Approved & Authorized Signer

Jules Guo

(Jules Guo)

Shenzhen Anbotek Compliance Laboratory Limited

Code:AB-RF-05-b

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangchang Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Tel: (86) 0755-26066440 Email: service@anbotek.com



Hotline
400-003-0500

www.anbotek.com



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2026-08-04



1. General Information

1.1. Client Information

Applicant	:	KIBU Inc.
Address	:	KIBU Inc., 38-3 Kamiyasumatsu, Tokorozawa-shi, Saitama 359-0025, JP
Manufacturer	:	Huizhou Huami Intelligent Technology Co., Ltd
Address	:	3Building 5, Huami Intelligent Technology Co., Ltd., Shengfeng Group (Huizhou) Industrial Park, Boluo County, Huizhou City, Guangdong Province, CN
Factory	:	Huizhou Huami Intelligent Technology Co., Ltd
Address	:	Building 5, Huami Intelligent Technology Co., Ltd., Shengfeng Group (Huizhou) Industrial Park, Boluo County, Huizhou City, Guangdong Province, CN

1.2. Description of Device (EUT)

Product Name	:	Wireless Mechanical Keyboard
Model No.	:	K104 JIS, K104 ANSI, K104, K104 ISO, K104 Mac, K104 Lite, K104 Standard, K104 Color, K104 Plus, K104 Pro, K104 Ultra, K104 Silent, K104 Limited, K104 HE, K104 RT (Note: Model differences please see page 7, so we prepare "K104 JIS" for test only.)
Trade Mark	:	N/A
Test Power Supply	:	DC 3.8V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Hardware Version	:	8101-1016-0002 V1
Software Version	:	CS475B-V0102-20260708
Adapter	:	N/A
RF Specification		
Operation Mode	:	☒ DSSS ☐ FHSS
Operation Frequency	:	2402~2480MHz
Number of Channel	:	79 Channels
Modulation Type	:	GFSK
Antenna Type	:	PCB Antenna
Antenna Gain(Peak)	:	2.59 dBi
Rated output Power	:	1mW Max.
Remark: (1) All of the RF specification are provided by customer. (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



Model differences:

Model No.	Appearance colors	Housing material	Positioning plate	Keycap	Battery capacity
K104JIS	Vintage White	ABS plastic housing	Translucent milky-white PC positioning plate	PBT dual-shot injection-molded keycaps, retro white	8000mAh
K104 ANSI	Vintage White	ABS plastic housing	PC mounting plate	Differences in exterior color and character style.	8000mAh
K104	Vintage White	ABS plastic housing	PC mounting plate	Differences in exterior color and character style.	8000mAh
K104 ISO	Vintage White	ABS plastic housing	PC mounting plate	Differences in exterior color and character style.	8000mAh
K104 Mac	Vintage White	ABS plastic housing	PC mounting plate	Differences in exterior color and character style.	8000mAh
K104 Lite	Black	ABS plastic housing	PC mounting plate	Differences in exterior color and character style.	4000mAh
K104 Standard	Dark gray	ABS plastic housing	FR4 mounting plate	Differences in exterior color and character style.	1200mAh
K104 Color	Transparent PC	Transparent PC case	PC mounting plate	Differences in exterior color and character style.	8000mAh
K104 Plus	Light blue	ABS plastic housing	PC mounting plate	Differences in exterior color and character style.	10000mAh
K104 Pro	Matte black	Anodized aluminum housing	Aluminum alloy positioning plate	Differences in exterior color and character style.	8000mAh



K104 Ultra	Natural-finish aluminum	Anodizing	Aluminum alloy positioning plate	Differences in exterior color and character style.	8000mAh
K104 Silent	Moonlight White	ABS plastic housing	FR4 mounting plate	Differences in exterior color and character style.	4000mAh
K104 Limited	Midnight Black	ABS plastic housing	PC mounting plate	Differences in exterior color and character style.	4000mAh
K104 HE	Vibrant Orange	Anodized aluminum housing	FR4 mounting plate	Differences in exterior color and character style.	8000mAh
K104 RT	Deep purple	Anodized aluminum housing	FR4 mounting plate	Differences in exterior color and character style.	8000mAh



1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
/	/	/	/

1.4. Description of Test Configuration

The EUT has been tested under typical operating condition. The Applicant provides software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	17	2419	34	2436	51	2453	68	2470
01	2403	18	2420	35	2437	52	2454	69	2471
02	2404	19	2421	36	2438	53	2455	70	2472
03	2405	20	2422	37	2439	54	2456	71	2473
04	2406	21	2423	38	2440	55	2457	72	2474
05	2407	22	2424	39	2441	56	2458	73	2475
06	2408	23	2425	40	2442	57	2459	74	2476
07	2409	24	2426	41	2443	58	2460	75	2477
08	2410	25	2427	42	2444	59	2461	76	2478
09	2411	26	2428	43	2445	60	2462	77	2479
10	2412	27	2429	44	2446	61	2463	78	2480
11	2413	28	2430	45	2447	62	2464		
12	2414	29	2431	46	2448	63	2465		
13	2415	30	2432	47	2449	64	2466		
14	2416	31	2433	48	2450	65	2467		
15	2417	32	2434	49	2451	66	2468		
16	2418	33	2435	50	2452	67	2469		

Note: EUT was tested with channel 0, 38 and 78.

1.5. Test Conditions

	Normal Test Conditions
Temperature	15°C - 35°C
Relative Humidity	45% - 75%
Pressure Range	86-106kPa



1.6. Test Voltage

Power Supply Voltage Fluctuation Test

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input To EUT	DC 3.7V	DC 4.07V	DC 3.33V
Output To RF Module	DC 3.30V	DC 3.30V	DC 3.30V
Voltage Variation (%)	--	0.00%	0.00%

Note: Voltage Variation (%)=(Output high or Low Voltage - Output Normal Voltage)/ Output Normal Voltage* 100

For extreme voltage test, we have tested the relationship between the external power supply and RF IC power supply. Base on the test results, only the normal voltage was selected to perform all items.



1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Last Cal.	Cal.Due Date
1	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	2025-12-29	2026-12-28
2	MXA Spectrum Analysis	KEYSIGHT	N9020A	2025-12-29	2026-12-28
3	MXG RF Vector Signal Generator	Agilent	N5182A	2025-12-29	2026-12-28

Note:

The above test equipment is calibrated by Guangzhou LiSai Metrology & Test Co.,Ltd.
Calibration method reference Article 24-2, Paragraph 4 of the Radio Act. (method c)

4	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-HWHS80B	2026-06-08	2027-06-07
---	---------------------------------------	-----------	------------	------------	------------

Note:

The test equipment is calibrated by GUANGZHOU NEM METROLOGY&TEST TECHNOLOGY CO.,LTD
Calibration method reference Article 24-2, Paragraph 4 of the Radio Act. (method c)

5	DC Power Supply	IVYTECH	IV3605	2025-09-05	2026-09-04
---	-----------------	---------	--------	------------	------------

Note:

The test equipment is calibrated by Centre Testing International Group Co., Ltd. (CTI)
Calibration method reference Article 24-2, Paragraph 4 of the Radio Act. (method c)

6	Oscilloscope	Tektronix	MDO3012	2025-09-30	2026-09-29
---	--------------	-----------	---------	------------	------------

Note:

The test equipment is calibrated by Ti Testing & Certification Group Co., Ltd. Shenzhen Branch
Calibration method reference Article 24-2, Paragraph 4 of the Radio Act. (method c)

Remark:

- (a) Calibration conducted by the National institute of information and Communications Technology (NICT) in Japan (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1) in JRL.
- (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No. 51 of 1992).
- (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- (d) Calibration, etc, conducted by using measuring instruments and other equipment listed in the right column of appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to (c)

From JRL Article 24 .2, paragraph 4, Item 2



1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



1.10. Measurement Uncertainty

Parameter	Uncertainty
Occupied Bandwidth	552Hz
Conducted Output Power	0.84dB
Conducted Spurious Emission	1.24dB
Frequency tolerance	58Hz
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



2. Summary of Test Results

Test Standard	Description of Test	Result
MIC Notice No.88 Appendix No.43 Article 2 Paragraph 1 Item 19	Frequency Tolerance	Complies
	Antenna power	Complies
	EIRP	Complies*
	Antenna Power Tolerance	Complies
	Occupied Bandwidth	Complies
	Spread Bandwidth	N/A
	Spurious Emissions	Complies
	Carrier sensing function 1	N/A**
	Carrier sensing function 2	N/A***
	Interference prevention function	Complies
	Secondary Radiated Emissions	Complies
	Dwell Time	N/A
	Transmission Radiated Angle Width (3dB Beam Bandwidth)	N/A****
	Antenna Absolute Gain	Complies

Note:

(1) N/A is an abbreviation for Not Applicable.

(2) This device have more than 1 subcarrier in 1MHz, compliance with the requirement.

*: Application to Antenna Gain more than 2.14dBi.

** : Application to transmitting devices which EIRP is less than (2.14dBi + antenna power limit) and the shortage of EIRP is compensated by the antenna power. Not applicable to this product.

***: Application to transmitting devices with OFDM modulation and the occupied bandwidth greater than 26MHz.

****: Application to EIRP more than 12.14dBm.



3. Frequency Tolerance Test

3.1. Test Limit

Test Limit	±50 ppm
------------	---------

3.2. Test Setup



3.3. Test Procedure

Test Frequency= test channel

RBW=VBW=10kHz

Span=500kHz

Sweep time=Auto

Detector mode=Positive peak

Indication mode=Max hold

3.4. Test Data

PASS

Please refer to Appendix A of the Appendix Test Data.



4. Antenna Power Test

4.1. Test Limit

No.	Modulation Method	Frequency Range	Antenna Power	E.I.R.P
1.	FHSS(Compound method with DSSS or OFDM) (OBW within 83.5MHz)	2427-2470.75 MHz	3mW/MHz or less	6.91-16.91dBm/MHz
		2400-2483.5 MHz (except 2427-2470.75MHz)	10mW/MHz or less	12.14-22.14dBm/MHz
2.	DSSS (OBW within 26MHz)	2400 - 2483.5 MHz	10mW/MHz or less	12.14-22.14dBm/MHz
3.	OFDM (OBW within 26MHz)		10mW/MHz or less	12.14- 22.14dBm/MHz
4.	OFDM (OBW 26-40MHz)		5mW/MHz or less	9.13-19.13dBm/MHz
5.	Other Digital methods (OBW within 26MHz)		10mW or less	12.14-22.14dBm
6.	Tolerance	+20%		

4.2. Test Setup



4.3. Test Configuration

1. Search Frequency of Peak Power

Test Frequency: test channel,

RBW=VBW≥99% Occupy Bandwidth, Span=4MHz (8MHz for 2M PHY), Sweep time=Auto, Detector mode =Positive peak

2. Antenna power= average burst power

4.4. Test Data

Pass

Please refer to Appendix B of the Appendix Test Data.



5. Occupied Bandwidth (99%) Test

5.1. Test Limit

Modulation type	Limit
FH:	83.5MHz or less
FH + DS:	83.5MHz or less
FH + OFDM:	83.5MHz or less
OFDM:	With 20M Bandwidth: 26MHz or less With 40M Bandwidth: 26-40MHz
Others:	26MHz or less

5.2. Test Setup



5.3. Test Procedure

Test Frequency= test channel

RBW=VBW=300kHz

Span=4MHz

Sweep time=Auto

Detector mode=Positive peak

Indication mode=Max hold

5.4. Test Data

PASS

Please refer to Appendix C of the Appendix Test Data.



6. Spurious Emissions Intensity Test

6.1. Test Limit

Frequency Range	Test Limit
≤2387MHz	≤2.5μW/MHz (-26dBm/MHz)
2387MHz to 2400MHz	≤25μW/MHz (-16dBm/MHz)
2483.5MHz to 2496.5MHz	≤25μW/MHz (-16dBm/MHz)
≥2496.5MHz	≤2.5μW/MHz (-26dBm/MHz)

6.2. Test Setup



6.3. Test Procedure

Test Frequency: test channel,

RBW=VBW=1MHz, Sweep time=Auto, Detector mode=Positive peak

6.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.

Note: SA set to from 2.4965GHz to 13GHz, plot shows from 2.497GHz to 13GHz as of SA's default format.




7. Interference prevention function

7.1. Test Limit

Test Limit	The identification code shall be 48 bits long
------------	---

7.2. Test Setup

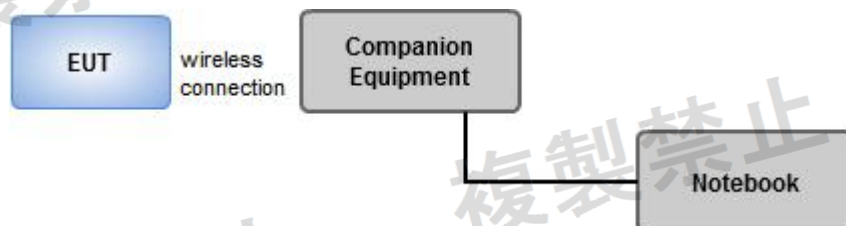

7.3. Test Configuration

1. Set EUT under operating mode and link up with companion equipment
2. Check communication status between EUT and companion equipment is normal
3. Record the max. reading.
4. Confirm the MAC address of EUT

7.4. Test Data

Test Mode	ID Code	Test Results
2.4G	03:71:E1:C6:6E:8F	Complies



8. Secondary Radiated Emissions Test

8.1. Test Limit

Frequency Range	Test Limit
30~ 1000MHz	$\leq 4.0\text{nW}$ (-54dBm)
1000~ 12500MHz	$\leq 20\text{nW}$ (-47dBm)

8.2. Test Setup



8.3. Test Configuration

Test Frequency: test channel,
Below 1GHz, RBW=VBW=100kHz;
Above 1GHz, RBW=VBW=1MHz,
Sweep time=Auto, Detector mode=Positive peak

Adjust the spectrum analyzer configuration during final testing: Set the spectrum analyzer at the secondary launch measurement as follows. Center frequency secondary firing frequency Sweep frequency width span = 0Hz. If the resolution bandwidth is less than 1 GHz, it is 100 kHz and 1 MHz for 1 GHz or more Same as video bandwidth resolution bandwidth Minimum time guaranteed sweep time measurement accuracy Sweep mode single sweep Detection mode samples or RMS
Any emissions identified during the sweeps exceeds 1/10 of applicable limit, shall be individually measured using RMS detector and compared to the limits

8.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

