


NCC RADIO TEST REPORT

Product name	Panel PC 平板電腦
Applicant	Qbic Technology Co., Ltd. 和暢科技股份有限公司
Manufacture	Qbic Technology Co., Ltd. 和暢科技股份有限公司
Rating(s)	DC12V from adapter
Trademark	Qbic
Model and/or type reference	TD-1060 Slim
Standard	LP0002:2018
Test Result	PASS

Date of receipt : 03-05-2020

Date of Issue : 03-17-2020

signature :




NCC RADIO TEST REPORT

Report Reference No...... : M200305N5-03

Compiled by (+ signature) Kevin Bothmann

Approved by (+ signature) Jay Gandhi

Date of issue..... : 2020-03-17



Applicant's name : Qbic Technology Co., Ltd.

和暢科技股份有限公司

Address : 26F.-12, No. 99, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22175, Taiwan

新北市汐止區新台五路一段 99 號 26 樓之 12 邮编：22175

Manufacture's Name : Qbic Technology Co., Ltd.

和暢科技股份有限公司

Address : 26F.-12, No. 99, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22175, Taiwan

新北市汐止區新台五路一段 99 號 26 樓之 12 邮编：22175

Test specification:

Standard : LP0002:2018

Test procedure : EIA 603、ANSI、FCC/47 CFR/2.1046、2.1047、2.1049、2.1051、2.1053 and 2.1055

Non-standard test method..... : N/A

Test item description

Product name : Panel PC 平板電腦

Trademark : Qbic

Model and/or type reference : TD-1060 Slim

Rating(s) : DC12V from adapter

Testing Laboratory information:

Testing Laboratory Name : Electro Magnetic Test, Inc.

Address : 1547 Plymouth Street, Mountain View, CA 94043

CAB Identifier Number : US0036

Tel : (650) 965-4000

Fax : (650) 965-3000

E-mail : jgandhi@emtlabs.com

Testing..... :

Date of receipt of test item..... : Mar. 05, 2020

Date (s) of performance of tests..... : Mar. 05~ Mar. 16 , 2020

Date of Issue : Mar. 17, 2020

Test Result : **Pass**

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Electro Magnetic Test, Inc., which is an independent testing and consulting firm. The test report is based on testing performed Electro Magnetic Test, Inc. personnel according to the measurement procedure described in the test specification given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Federal Government.

Electro Magnetic Test, Inc. is recognized by the following agencies for performing EMI/EMC testing:

COUNTRY	AGENCY	IDENTIFYING #
USA	Federal Communications Commission (FCC) (EMT's test site is recognized by the FCC)	Registration Number: 90576
USA, Canada, Taiwan, Australia/New Zealand, European Community	National Voluntary Lab Accreditation Program (NVLAP) (EMT is accredited by NVLAP. A copy of the NVLAP Scope Of Accreditation is available upon request.)	Lab Code: 200147-0
Canada	Industry Canada	File No.: IC 2804
Japan	Voluntary Control Council For Interference (VCCI)	A-0118
	Open Field Test Site "A"	-
	Mains Conducted Emissions Test Site "A"	-
	Telecom Conducted Emissions Test Site "A"	-
	3 Meter Semi-Anechoic Chamber Site "E"	-
	3 Meter Semi-Anechoic Chamber Site "E" (1GHz – 6GHz)	-
	Mains Conducted Emissions Test Site "E"	-
	Telecom Conducted Emissions Test Site "E"	-
Korea	Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (A copy of the Scope Of Accreditation is available upon request)	US0036
Taiwan	Bureau Of Standards, Metrology and Inspection (BSMI)	Reference Number: SL2-IN-E-1024
Australia / New Zealand	Australian Communications Authority (AUSTEL)	*

***THESE AGENCIES DO NOT ISSUE AN IDENTIFYING NUMBER TO TEST LABS.**

Table of Contents	Page
GENERAL REPORT SUMMARY	3
1. SUMMARY OF TEST RESULTS	6
1.1 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	10
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
3. EMC EMISSION TEST	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	16
3.1.2 TEST PROCEDURE	17
3.1.3 DEVIATION FROM TEST STANDARD	17
3.1.4 TEST SETUP	17
3.1.5 TEST RESULTS	18
3.2 RADIATED EMISSION MEASUREMENT	20
3.2.1 RADIATED EMISSION LIMITS	20
3.2.2 TEST PROCEDURE	21
3.2.3 TEST SETUP	22
3.2.4 TEST RESULTS (BETWEEN30 – 1000 MHZ)	23
3.2.5 TEST RESULTS (ABOVE 1000 MHZ)	27
3.2.6 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	147
4 OCCUPIED BANDWIDTH TEST	167
4.1 26DB BANDWIDTH TEST	167
4.2 TEST PROCEDURE	167
4.3 DEVIATION FROM STANDARD	167
4.4 TEST SETUP	167
4.5 TEST RESULTS	168
5 PEAK POWER DENSITY	196
5.1 APPLIED PROCEDURES / LIMIT	196
5.2 TEST PROCEDURE	196
5.3 DEVIATION FROM STANDARD	196
5.4 TEST RESULTS	197
6 MAXIMUM PEAK OUTPUT POWER	225
6.1 APPLIED PROCEDURES / LIMIT	225

Table of Contents	Page
6.2 TEST PROCEDURE	225
6.3 DEVIATION FROM STANDARD	225
6.4 TEST SETUP	225
6.5 TEST RESULTS	226
7 BAND EDGE	229
7.1 APPLIED PROCEDURES / LIMIT	229
7.2 TEST PROCEDURE	229
7.3 DEVIATION FROM STANDARD	229
7.4 TEST SETUP	229
7.5 TEST RESULTS	230
9. EUT TEST PHOTO	247
10. APPENDIX-Photographs of EUT Constructional Details	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

LP0002:2018			
Standard Section	Test Item	Judgment	Remark
4.7.3.4(2)	26 dB Emissions Bandwidth	PASS	None
4.7.3.1	Peak Transmit Power	PASS	None
4.7.3.1	Peak Power Spectral Density	PASS	None
4.7.4.5/2.3	AC Power Line Emissions	PASS	None
4.7.4/2.8	Radiated Emissions	PASS	None
4.7.4/2.8	Band Edge	PASS	None

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) Reference to the KDB-789033 and KDB-662911.

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	1.38dB
2	Radiated Emission Test	3.17dB
3	RF power,conducted	0.16dB
4	Spurious emissions,conducted	0.21dB
5	All emissions,radiated(<1G)	4.68dB
6	All emissions,radiated(>1G)	4.89dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Panel PC 平板電腦	
Trade Name	Qbic	
Model Name	TD-1060 Slim	
Serial Model Name	N/A	
Product Description	The EUT is a Panel PC 平板電腦	
	Operation Frequency:	5.18GHz-5.24GHz 5.25GHz-5.35GHz 5.47GHz-5.725GHz
	Modulation Type:	IEEE for 802.11a: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE for 802.11n: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE for 802.11ac:OFDM (QPSK/BPSK/16QAM/64QAM/256 QAM)
	Number Of Channel	Please see Note 2.
	Antenna Designation:	FPC Antenna
	Antenna Gain(Peak)	1.99 dBi
	Output Power:	802.11a: 15.23dBm 802.11n 20: 14.61dBm 802.11ac 20: 14.70dBm 802.11n 40: 14.76dBm 802.11ac 40: 14.71dBm 802.11ac 80: 13.36dBm
Channel List	Please refer to the Note 2.	
Power Rating	DC12V from adapter	
Adapter Manufacturer /Model No.	N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	N/A	
EUT Modification(s)	N/A	
Model difference	N/A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List							
802.11a/n/ac (20MHz) (5.15-5.25GHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	44	5220	48	5240
38	5190	42	5210	46	5230	-	-
802.11a/n/ac(20MHz) (5.25-5.35GHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	56	5280	60	5300	64	5320
802.11a/n/ac(20MHz) (5.47-5.725GHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	104	5520	108	5540	112	5560
116	5580	120	5600	124	5620	128	5640
132	5660	136	5680	140	5700	-	-
802.11n/ac (40MHz) (5.15-5.25GHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	42	5210	46	5230	-	-
40	5200	44	5220	-	-	-	-
802.11n/ac(40MHz) (5.25-5.35GHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270	62	5310	-	-	-	-
802.11n/ac(40MHz) (5.47-5.725GHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510	110	5550	118	5590	126	5630
134	5670	-	-	-	-	-	-
802.11ac (80MHz) (5.15-5.25GHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	-	-	-	-	-	-
802.11 ac(80MHz) (5.25-5.35GHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290	-	-	-	-	-	-
802.11 ac(80MHz) (5.47-5.725GHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
106	5530	-	-	-	-	-	-

3.

Table for Filed Antenna

Ant	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	深圳市億聖邦 科技有限公司	SLK-YBD-29 16-L-115I-B	FPC antenna	N/A	1.99 dBi	Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a : All Rate
Mode 2	802.11n(20/40) : All Rate
Mode 3	802.11ac(20/40) : All Rate
Mode 4	802.11ac(80) : All Rate
Mode 5	Link Mode
Mode 6	RX

For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a
Mode 2	802.11n(20/40)
Mode 4	802.11ac(80)
Mode 6	RX


Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.

Test software Version	Test program: CMD		
Frequency	5180 MHz	5220 MHz	5240 MHz
Frequency	5260 MHz	5280 MHz	5320 MHz
Frequency	5500 MHz	5600 MHz	5700 MHz
Frequency	5190 MHz	5230 MHz	-
Frequency	5270 MHz	5310 MHz	-
Frequency	5510 MHz	5590 MHz	5670 MHz
Frequency	5210 MHz	5290 MHz	5530 MHz

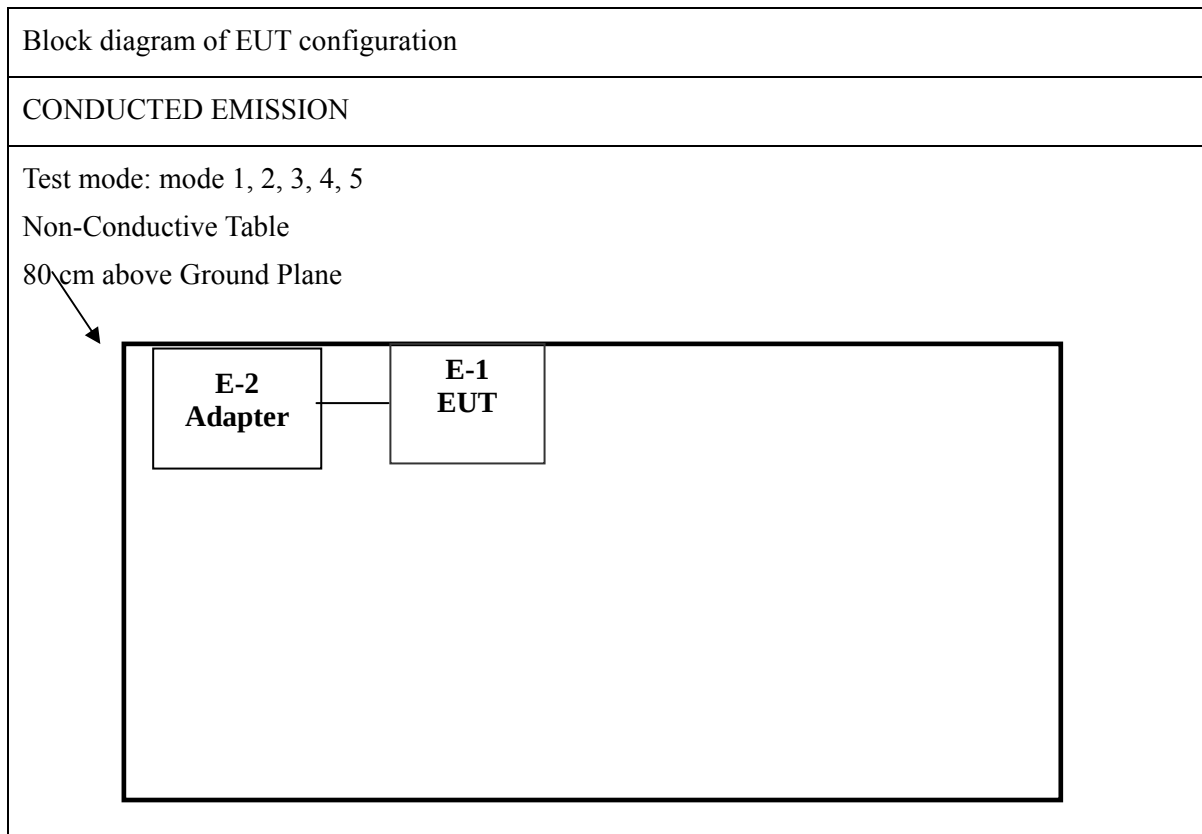2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Block diagram of EUT configuration

RADIATED EMISSION

Test mode: mode 1, 2, 3 ,4,5

Non-Conductive Table

80 cm above Ground Plane

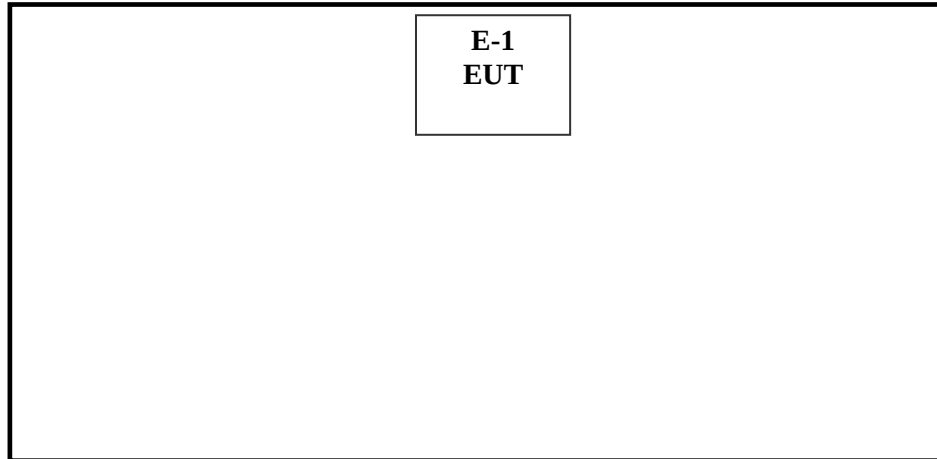

2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Panel PC 平板電腦	Qbic	TD-1060 Slim	N/A	N/A	EUT
E-2	Adapter	SHENZHEN HONOR ELECTRONIC CO.,LTD	ADS-25D-12 12018E	N/A	N/A	EUT

Item	Equipment	Mfr/Brand	Model/Type No.	Note
N/A	N/A	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” or “with ferrite core”,”NO” means “unshielded” or”without ferrite core”

EQUIPMENTS LIST FOR ALL TEST ITEMS

EQUIPMENT TYPE	MANU-FACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
Spectrum Analyzer	Hewlett Packard	8566B	3013A07296	April 29, 2019	1 Year
RF Preselector	Hewlett Packard	85685A	3010A01157	April 29, 2019	1 Year
Quasi-Peak Adapter	Hewlett Packard	85650	2521A00584	April 29, 2019	1 Year
Preamplifier	Com Power	PA-102	1482	April 29, 2019	1 Year
RF Attenuator	Mini-Circuits	CAT-10	Asset #1000	December 8, 2019	1 Year
LISN	Com Power	LI-200	12012	September 10, 2019	1 Year
LISN	Com Power	LI-200	12214	September 10, 2019	1 Year
LISN	Com Power	LI-200	1767	September 10, 2019	1 Year
LISN	Com Power	LI-200	1768	September 10, 2019	1 Year
Biconical Antenna	Com Power	AB-100	01557	December 29, 2019	1 Year
Log Periodic Antenna	Com Power	AL-100	16037	December 22, 2019	1 Year
Horn Antenna	Com Power	AHA-118	711054	December 22, 2019	1 Year
Antenna Mast	Com Power	AM-400	N/A	N/A	N/A
Turntable	Com Power	TT-100	N/A	N/A	N/A
Computer	Dell, Inc.	DHS	DNSV641	N/A	N/A
Printer	Hewlett Packard	C8124A	CN39B2234T	N/A	N/A
Plotter	Hewlett Packard	7470A	2308A96499	N/A	N/A

EMI Test Equipment (Continued)

EQUIPMENT TYPE	MANU-FACT URER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
EMI Receiver	Rohde & Schwarz	ESU40	100127	June 12, 2019	1 Year
BiConiLog Antenna	ETS-Lindgren	3142D	00102183	August 14, 2019	1 Year
Horn Antenna	ETS-Lindgren	3117	00109294	May 6, 2020	1 Year
Preamplifier	Rohde & Schwarz	TS-PR18	100056	June 12, 2019	1 Year
Antenna Mast	ETS-Lindgren	2175	00095727	N/A	N/A
Turntable	ETS-Lindgren	2187-3.0	00118231	N/A	N/A
Computer	Acer	Aspire 8930	85100050123	N/A	N/A
Multi-Function Controller	ETS-Lindgren	2090	00102270	N/A	N/A
Loop Antenna	ARA	PLA-1030/B	1029	May 19, 2019	1 Year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5			66 - 56 *	56 - 46 *	CISPR
0.50 -5.0			56.00	46.00	
5.0 -30.0			60.00	50.00	

0.15 -0.5			66 - 56 *	56 - 46 *	Section 15.407 (b)
0.50 -5.0			56.00	46.00	
5.0 -30.0			60.00	50.00	

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

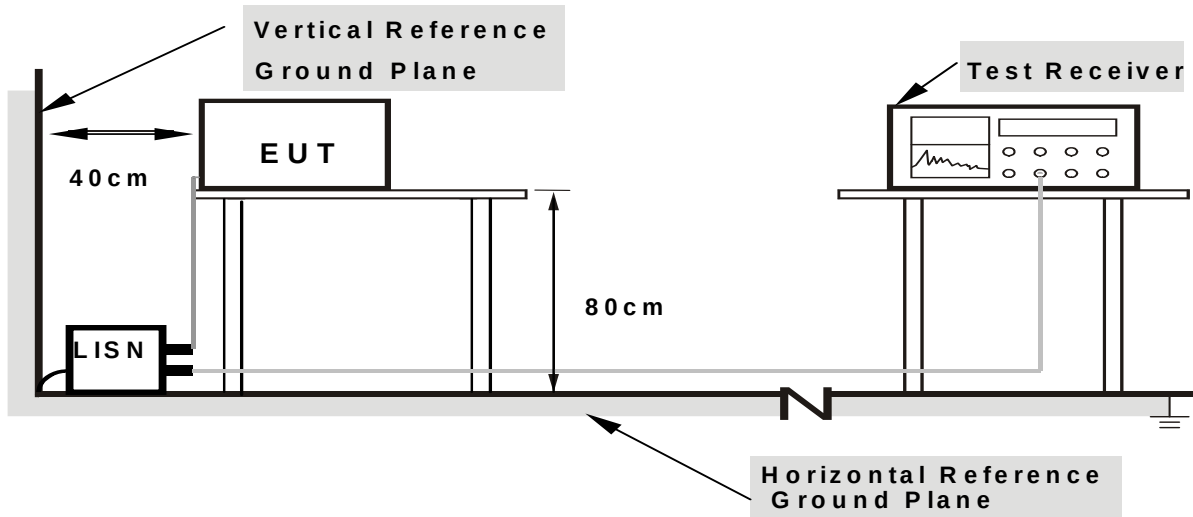


Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 TEST RESULTS

EUT :	Panel PC 平板電腦	Model Name. :	TD-1060 Slim
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2020-03-12
Test Mode :	TX(worst case)	Phase :	L
Test Voltage :	DC12V from adapter		

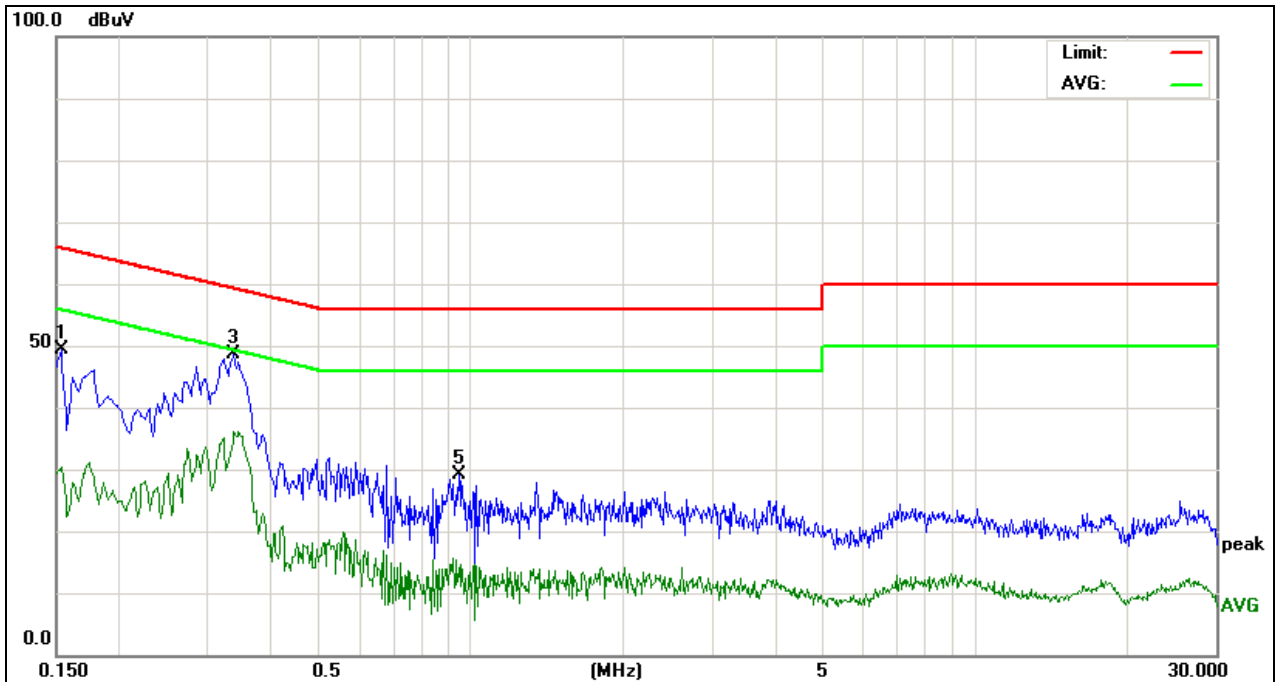


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss + Pulse limit.
3. '*' means the worst case

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	37.51	11.84	49.35	65.78	-16.43	peak
2		0.1539	18.48	11.84	30.32	55.78	-25.46	AVG
3	*	0.3379	38.36	10.18	48.54	59.25	-10.71	peak
4		0.3379	25.85	10.18	36.03	49.25	-13.22	AVG
5		0.9460	19.26	9.94	29.20	56.00	-26.80	peak
6		0.9460	5.79	9.94	15.73	46.00	-30.27	AVG

EUT :	Panel PC 平板電腦	Model Name. :	TD-1060 Slim
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2020-03-12
Test Mode :	TX(worst case)	Phase :	N
Test Voltage :	DC12V from adapter		

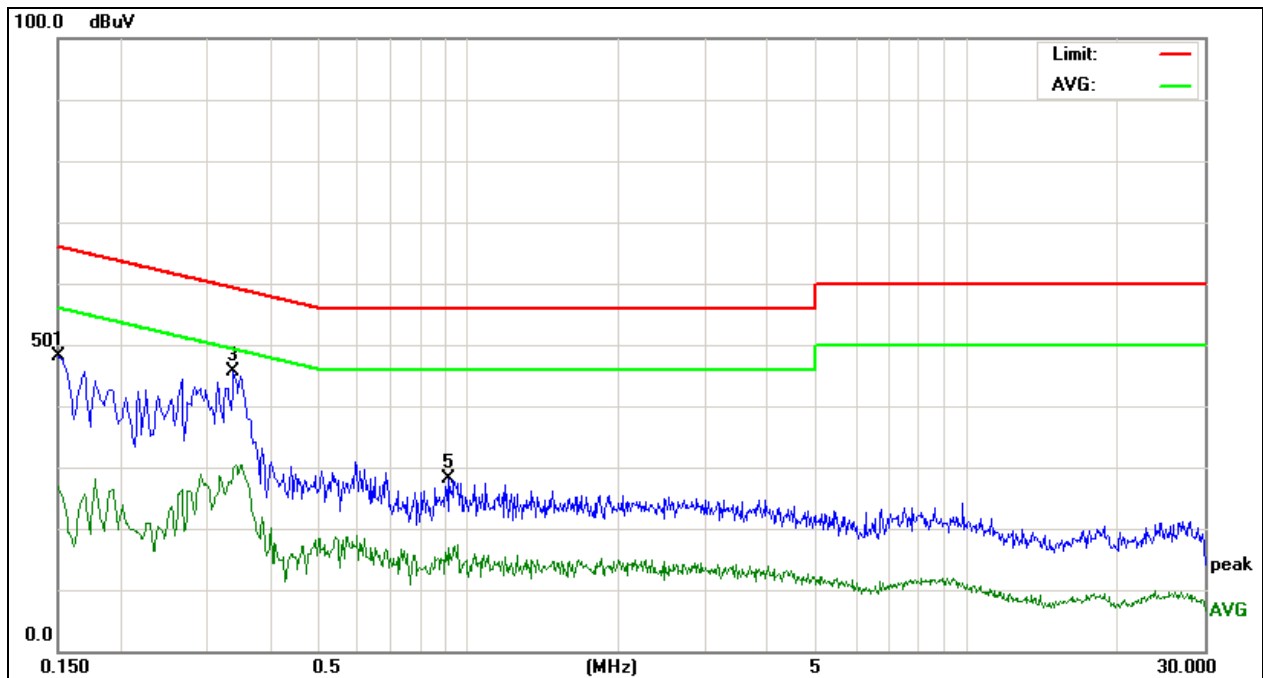

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss + Pulse limit.
3. '*' means the worst case

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1500	36.14	11.94	48.08	65.99	-17.91	peak
2		0.1500	14.84	11.94	26.78	55.99	-29.21	AVG
3	*	0.3379	35.40	10.18	45.58	59.25	-13.67	peak
4		0.3379	20.32	10.18	30.50	49.25	-18.75	AVG
5		0.9140	18.27	9.93	28.20	56.00	-27.80	peak
6		0.9140	7.55	9.93	17.48	46.00	-28.52	AVG

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 or 1.5 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the Antenna 1#re set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

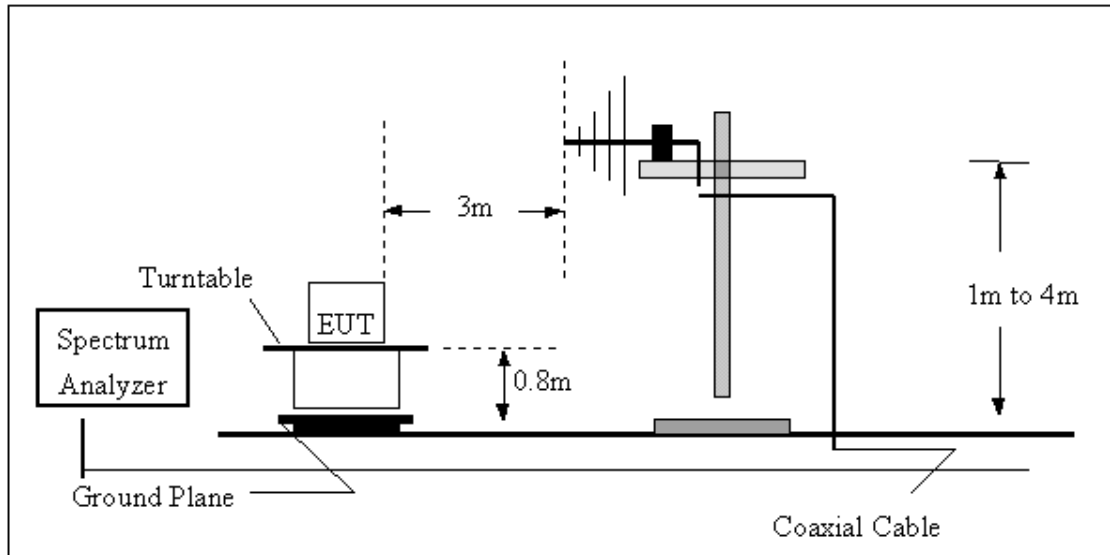

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

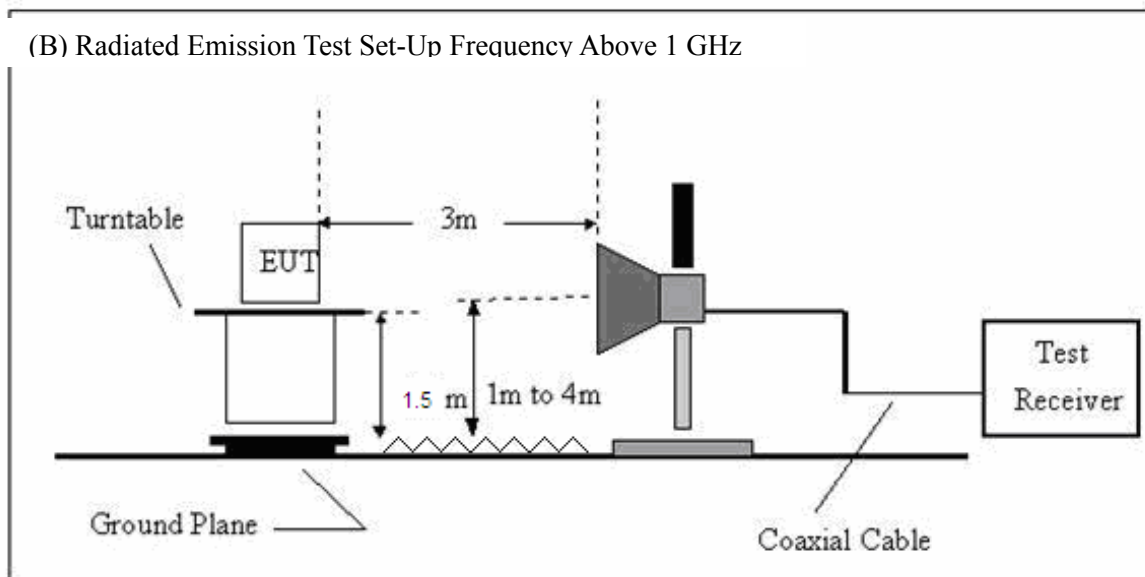


The field strength is calculated by adding the Antenna Factor, Cable Loss & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Pre-amplifier Factor

3.2.4 TEST RESULTS (BETWEEN 30 – 1000 MHZ)

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	TX 802.11a(20)	Polarization :	Horizontal
Test Power :	DC12V from adapter		

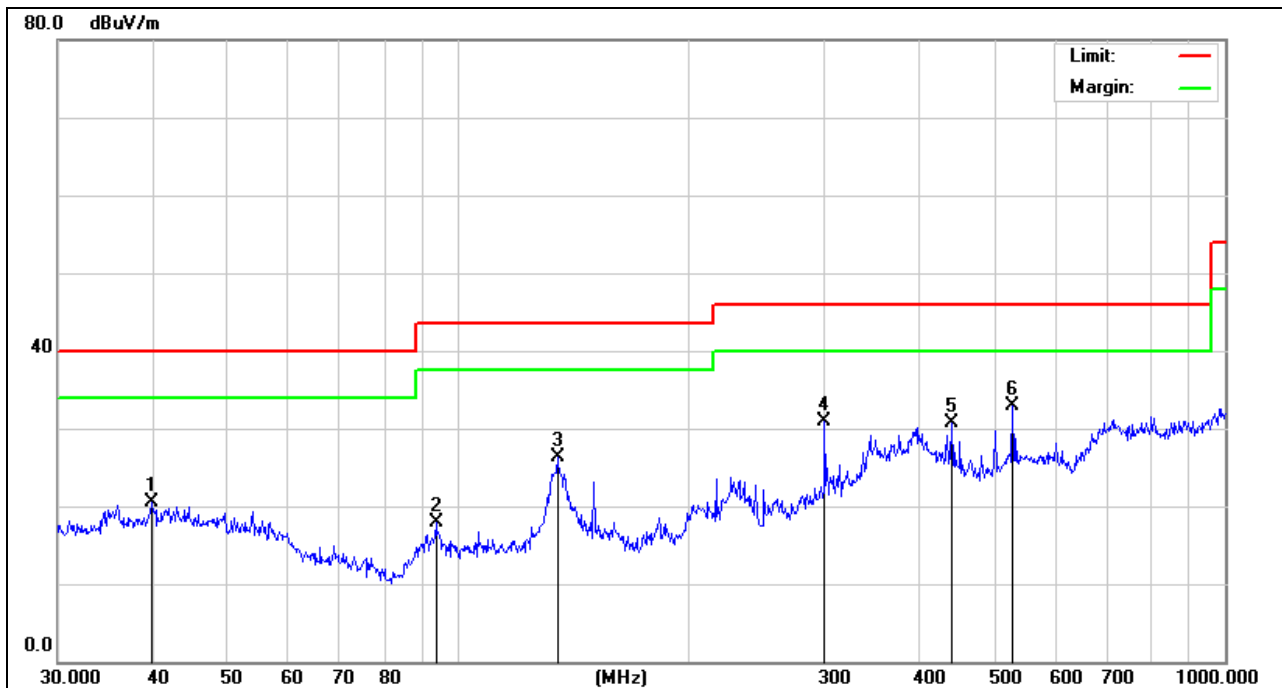


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		39.7146	22.80	-2.36	20.44	40.00	-19.56	peak
2		93.4402	26.54	-8.64	17.90	43.50	-25.60	peak
3		134.5592	34.13	-7.73	26.40	43.50	-17.10	peak
4		300.3672	35.61	-4.79	30.82	46.00	-15.18	peak
5		440.1963	28.75	1.92	30.67	46.00	-15.33	peak
6	*	528.2458	29.09	3.73	32.82	46.00	-13.18	peak

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	TX 802.11a(20)	Polarization :	Vertical
Test Power :	DC12V from adapter		

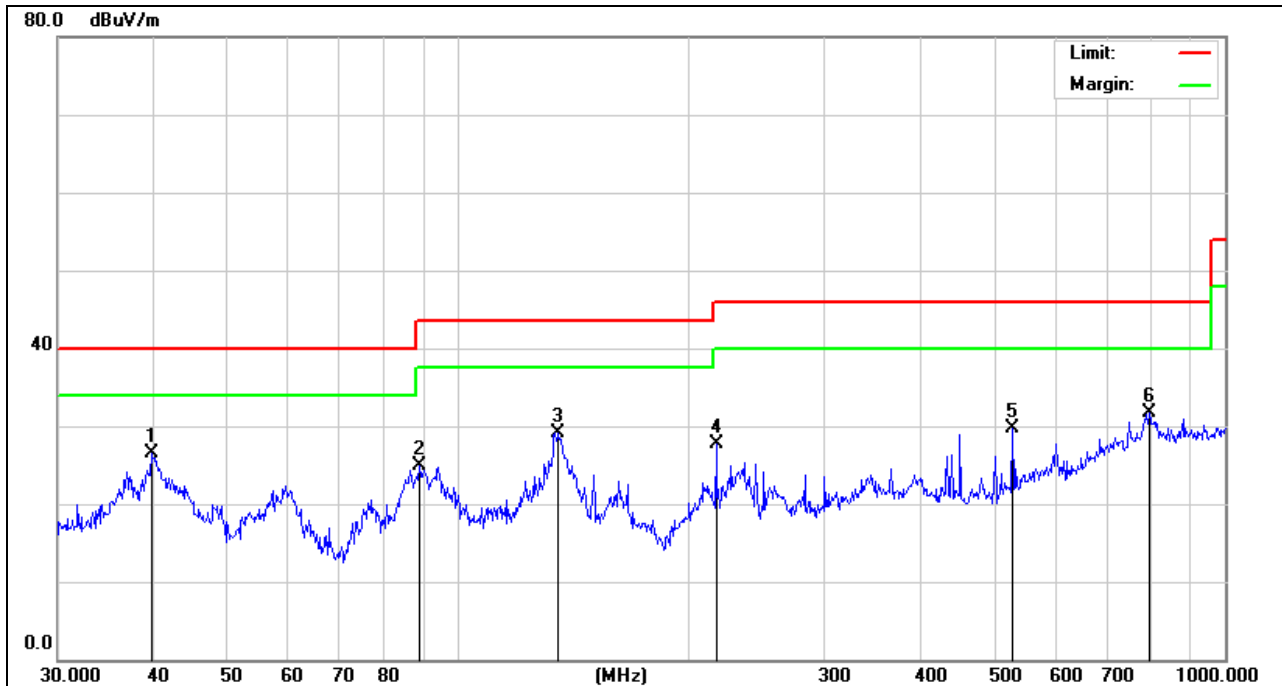


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	39.7146	31.03	-4.57	26.46	40.00	-13.54	peak
2		88.9639	35.60	-10.66	24.94	43.50	-18.56	peak
3		135.0319	37.85	-8.71	29.14	43.50	-14.36	peak
4		216.7828	33.35	-5.65	27.70	46.00	-18.30	peak
5		528.2458	29.40	0.22	29.62	46.00	-16.38	peak
6		796.1830	24.16	7.56	31.72	46.00	-14.28	peak


EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	RX	Polarization :	Horizontal
Test Power :	DC12V from adapter		

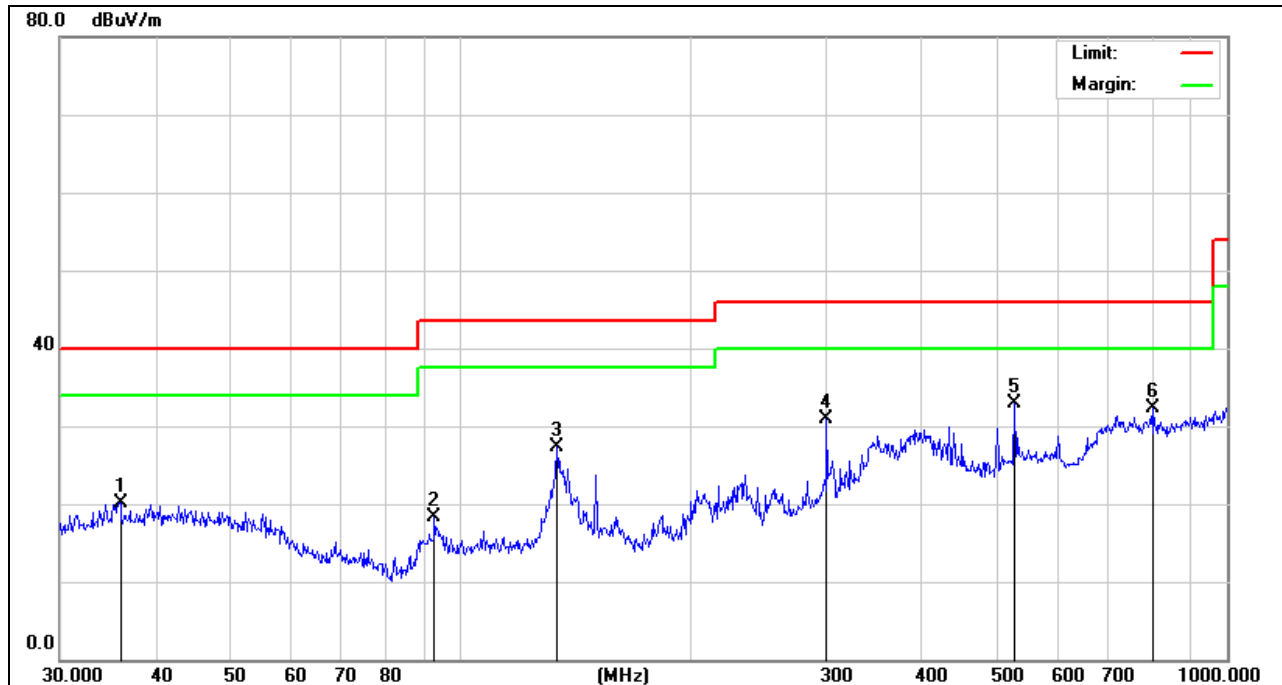

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		36.0007	23.81	-3.67	20.14	40.00	-19.86 peak
2		92.4624	26.98	-8.67	18.31	43.50	-25.19 peak
3		133.6188	35.07	-7.77	27.30	43.50	-16.20 peak
4		300.3672	35.65	-4.79	30.86	46.00	-15.14 peak
5	*	528.2458	29.11	3.73	32.84	46.00	-13.16 peak
6		801.7863	25.09	7.17	32.26	46.00	-13.74 peak

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	RX	Polarization :	Vertical
Test Power :	DC12V from adapter		

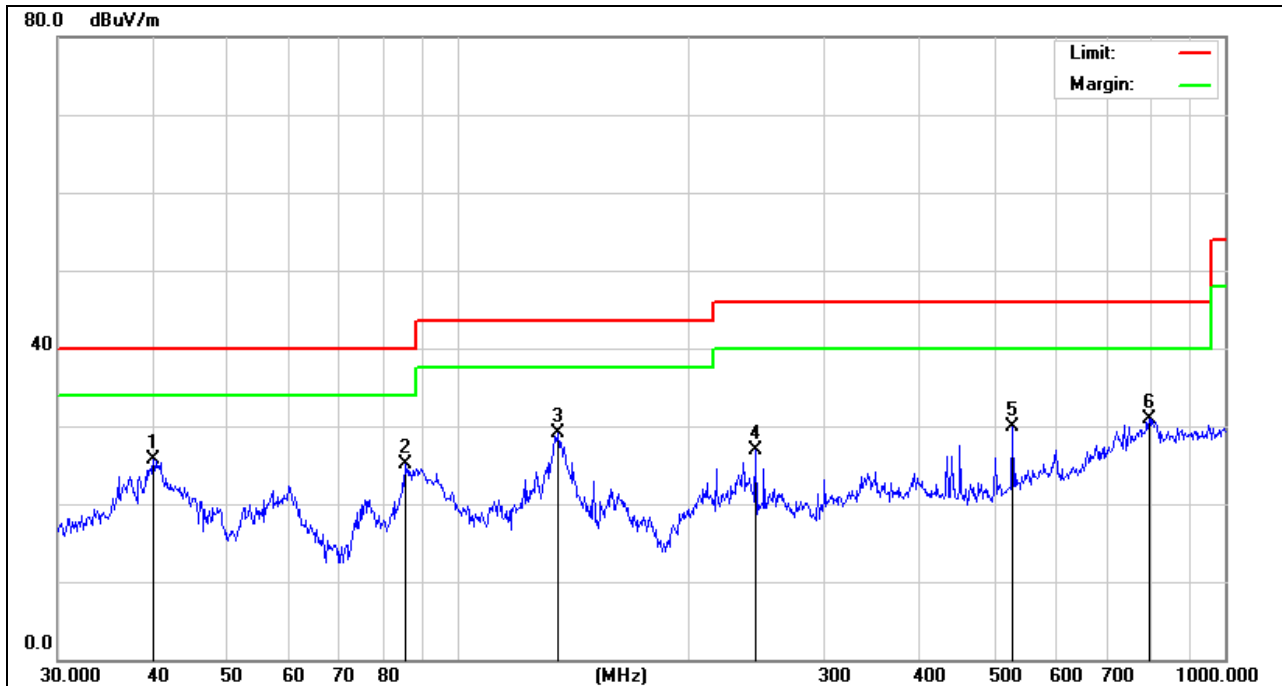

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		39.9941	30.16	-4.55	25.61	40.00	-14.39	peak
2		85.2980	35.93	-10.79	25.14	40.00	-14.86	peak
3	*	135.0319	37.87	-8.71	29.16	43.50	-14.34	peak
4		244.2321	33.58	-6.60	26.98	46.00	-19.02	peak
5		528.2458	29.78	0.22	30.00	46.00	-16.00	peak
6		796.1829	23.41	7.56	30.97	46.00	-15.03	peak


3.2.5 TEST RESULTS (ABOVE 1000 MHZ)

5.15GHz~5.25GHz:

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 36	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1844.211	45.70	-9.43	36.27	74.00	-37.73	peak
2843.895	43.64	-2.65	40.99	74.00	-33.01	peak
3956.620	43.03	3.52	46.55	74.00	-27.45	peak
4383.784	44.88	4.50	49.38	74.00	-24.62	peak
6760.532	43.62	6.02	49.64	74.00	-24.36	peak
17758.958	32.84	24.84	57.68	74.00	-16.32	peak
17758.958	23.34	24.84	48.18	54.00	-5.82	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

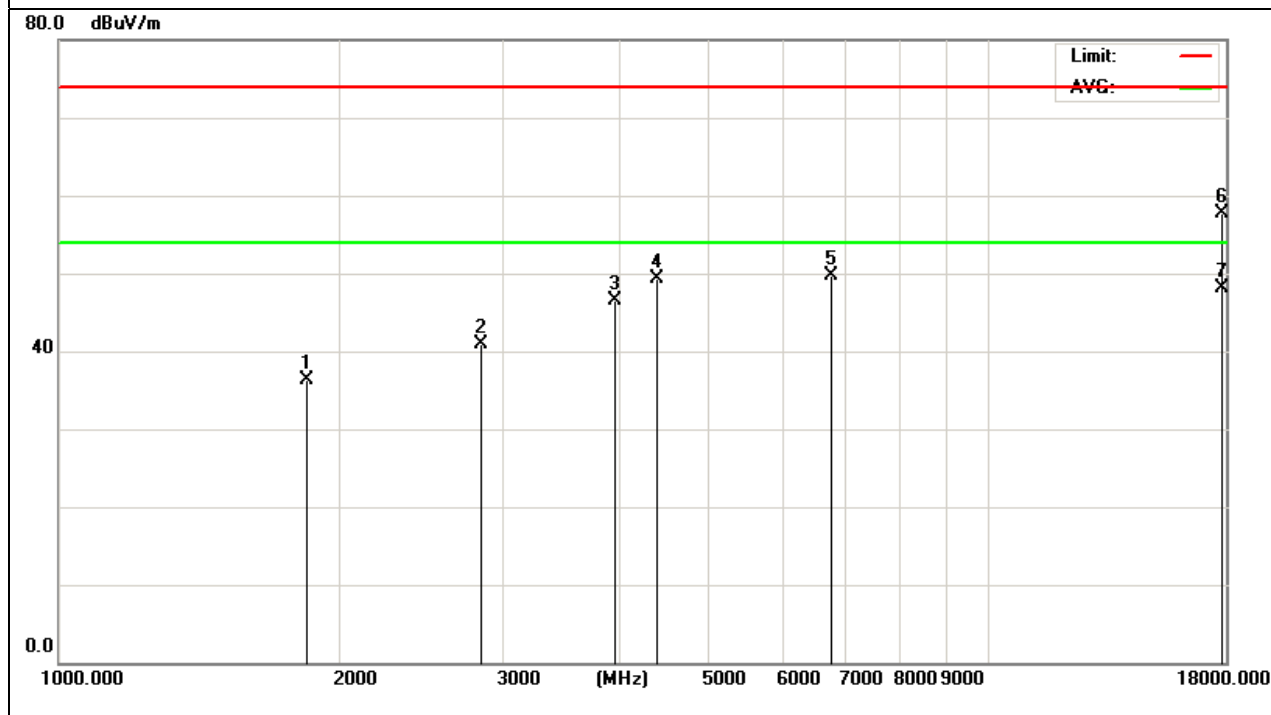

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 36	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1758.441	44.28	-9.46	34.82	74.00	-39.18	peak
3025.829	43.33	-1.62	41.71	74.00	-32.29	peak
4355.886	44.41	4.45	48.86	74.00	-25.14	peak
6835.992	43.78	6.07	49.85	74.00	-24.15	peak
8012.718	42.23	10.40	52.63	74.00	-21.37	peak
17850.007	34.79	24.78	59.57	74.00	-14.43	peak
17850.000	23.58	24.78	48.36	54.00	-5.64	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

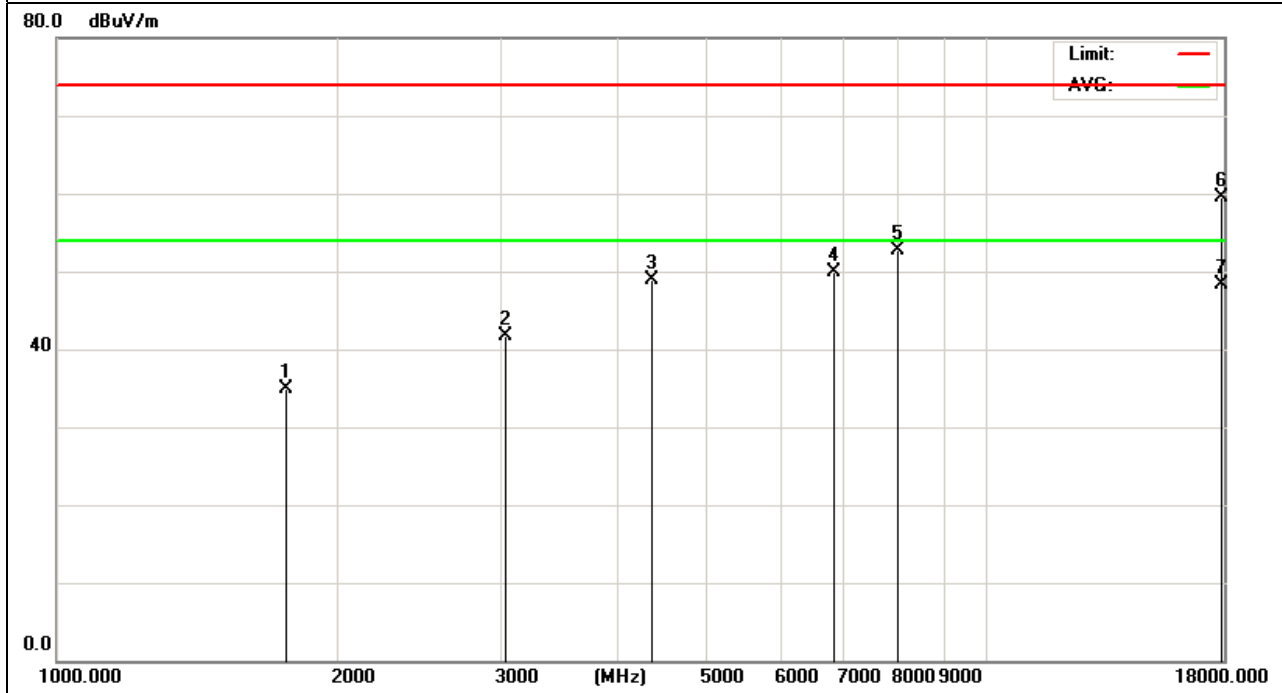

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 36	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19327.000	42.35	14.27	56.62	74.00	-17.38	peak
19327.000	32.48	14.27	46.75	54.00	-7.25	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

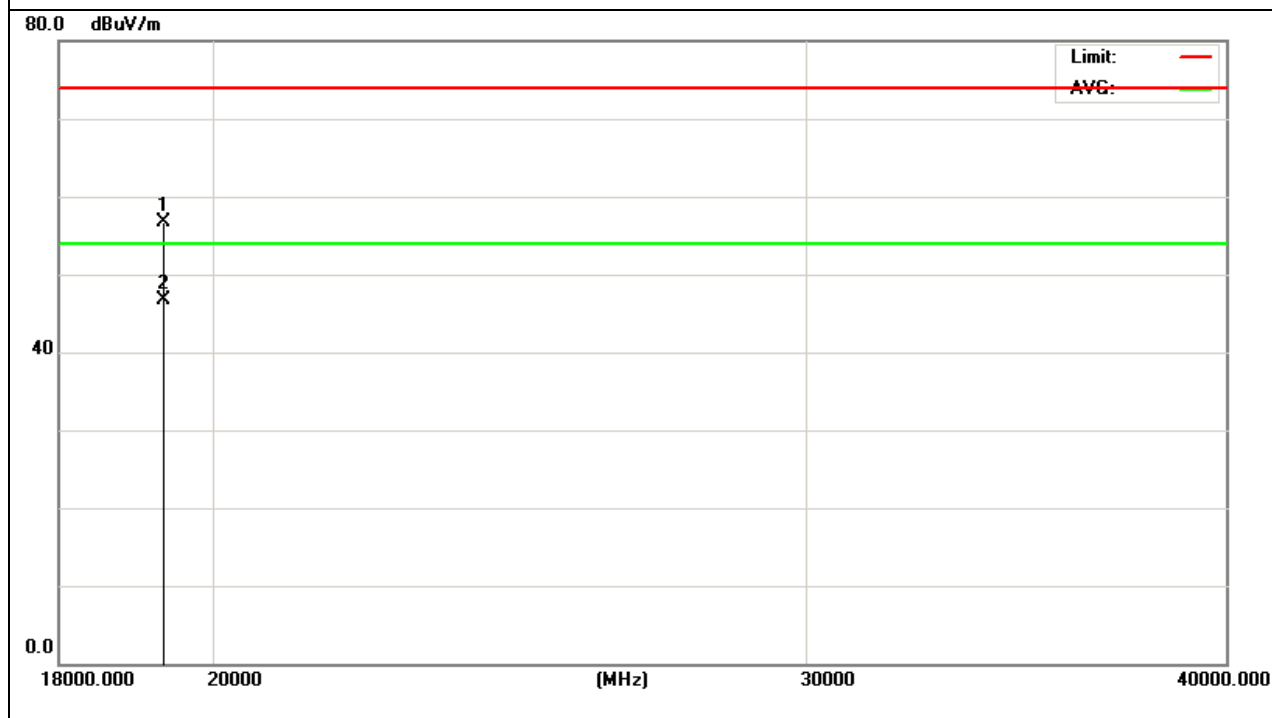

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 36	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19299.000	42.03	14.23	56.26	74.00	-17.74	peak
19299.000	31.58	14.23	45.81	54.00	-8.19	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

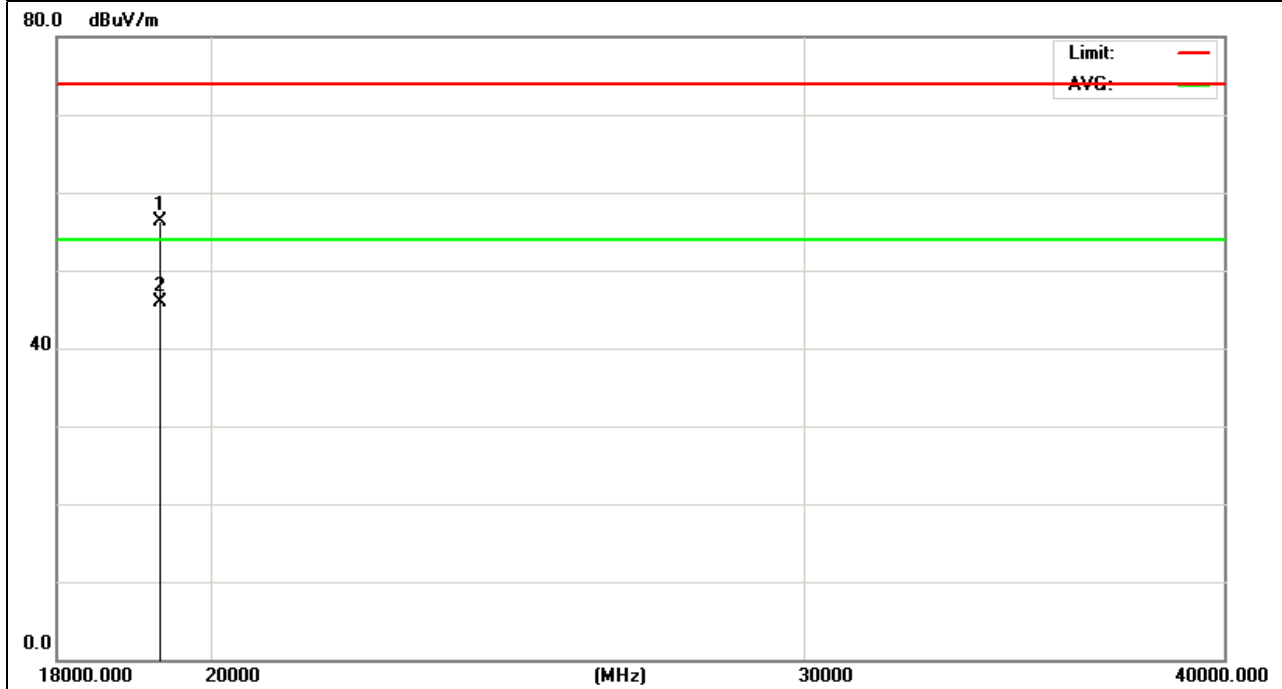

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 44	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1777.958	45.12	-9.40	35.72	74.00	-38.28	peak
2845.657	44.32	-2.64	41.68	74.00	-32.32	peak
3956.287	43.01	3.52	46.53	74.00	-27.47	peak
4368.781	44.68	4.47	49.15	74.00	-24.85	peak
6776.369	43.28	6.03	49.31	74.00	-24.69	peak
17784.215	32.74	24.84	57.58	74.00	-16.42	peak
17784.215	23.62	24.84	48.46	54.00	-5.54	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

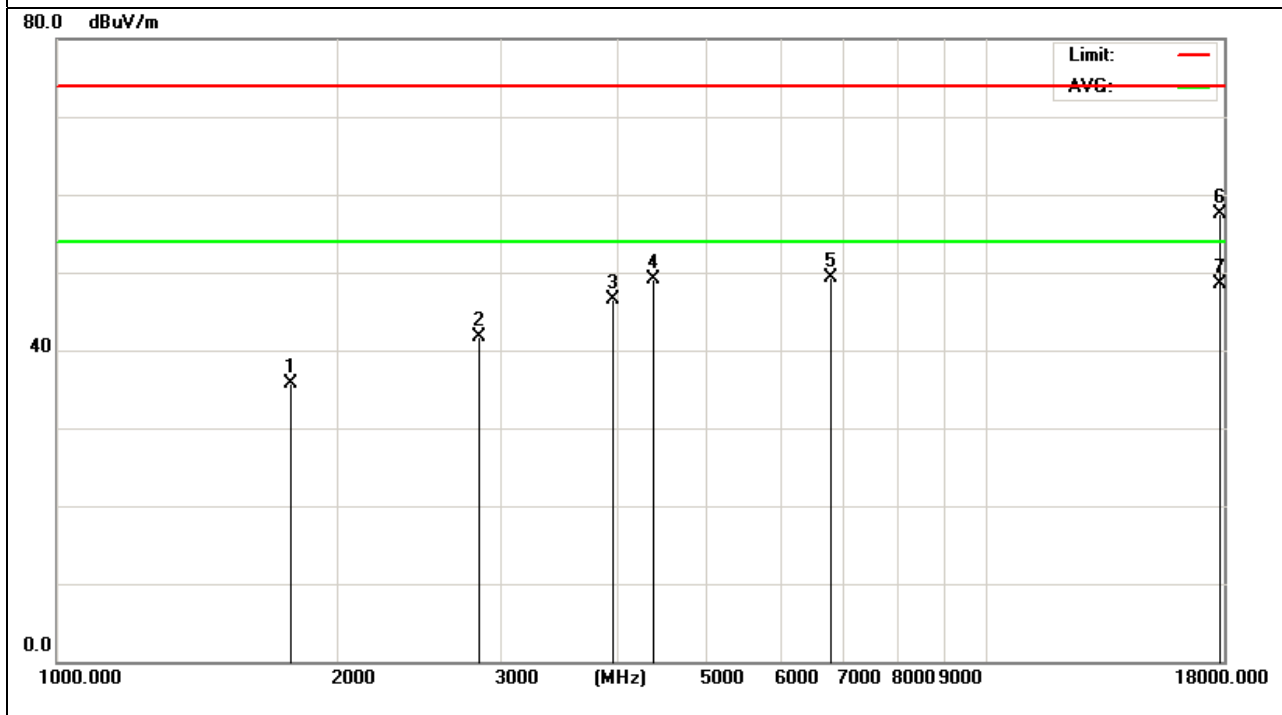

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 44	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1866.841	45.76	-9.46	36.30	74.00	-37.70	peak
3020.481	43.04	-1.63	41.41	74.00	-32.59	peak
4334.690	44.55	4.40	48.95	74.00	-25.05	peak
4886.620	43.98	5.14	49.12	74.00	-24.88	peak
8010.227	42.07	10.40	52.47	74.00	-21.53	peak
17788.001	33.74	24.83	58.57	74.00	-15.43	peak
17788.001	23.22	24.83	48.05	54.00	-5.95	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

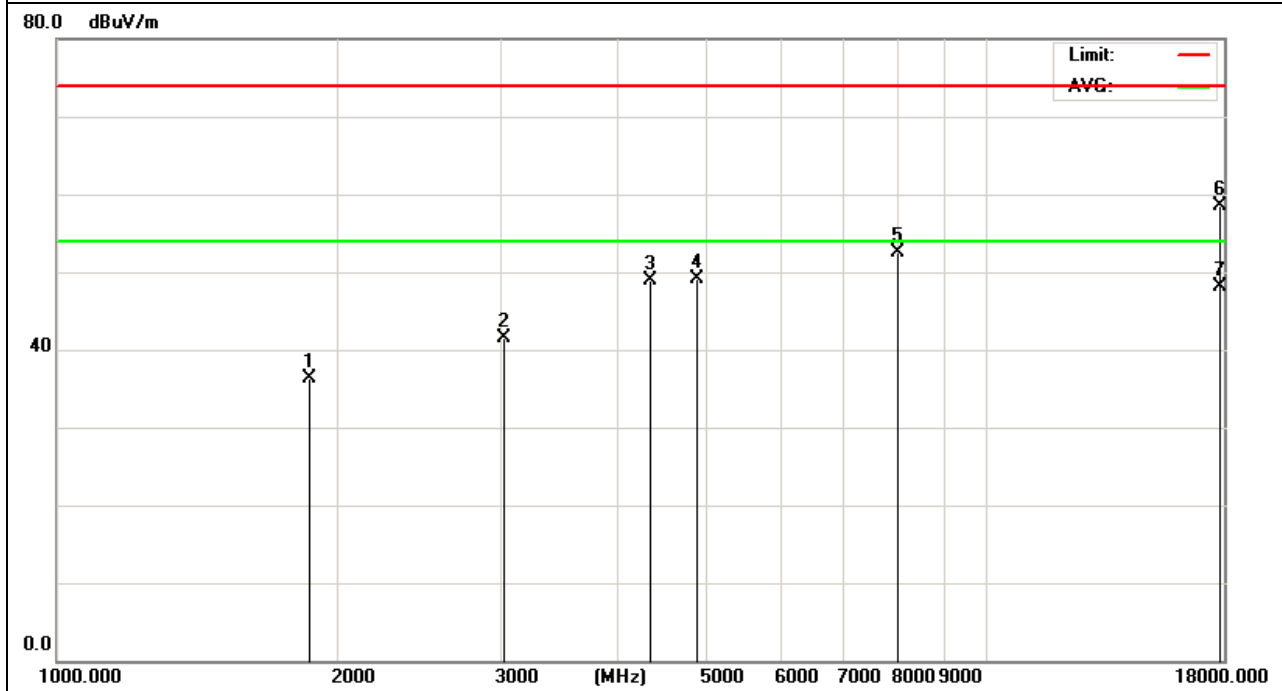

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 44	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19556.000	40.06	14.60	54.66	74.00	-19.34	peak
19556.000	31.24	14.60	45.84	54.00	-8.16	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

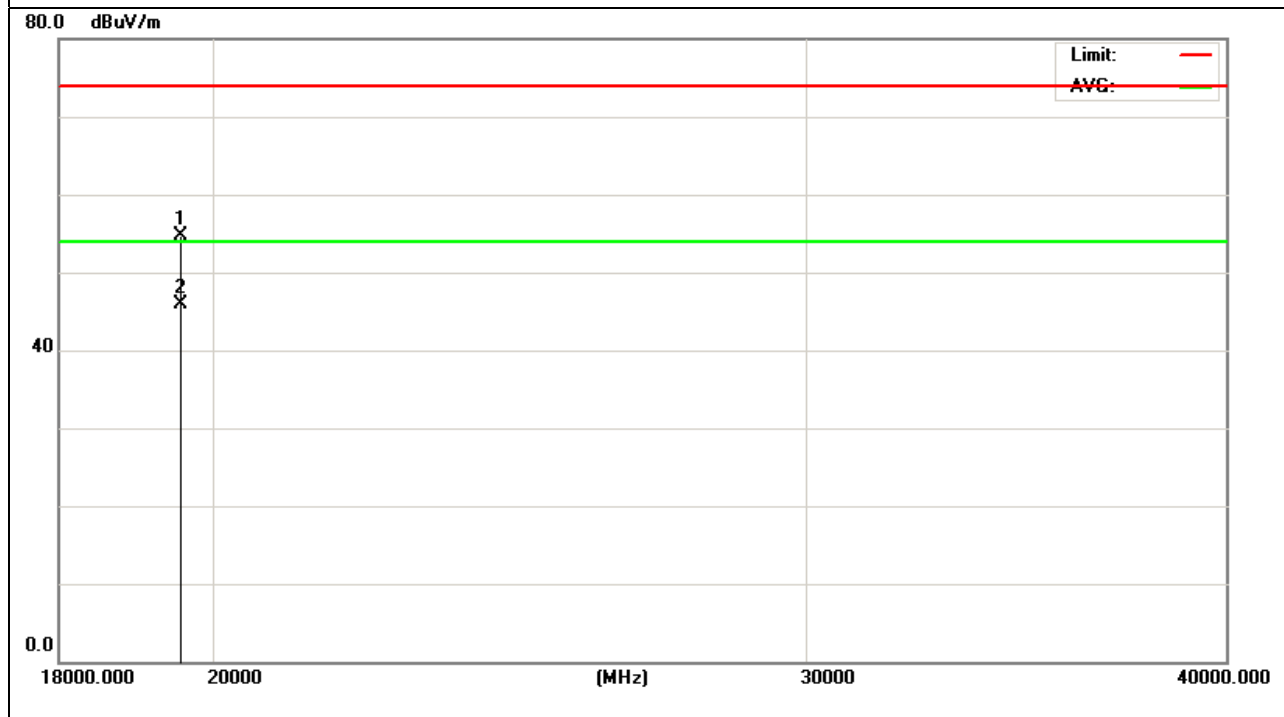

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 44	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19559.000	40.84	14.62	55.46	74.00	-18.54	peak
19559.000	30.58	14.62	45.20	54.00	-8.80	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

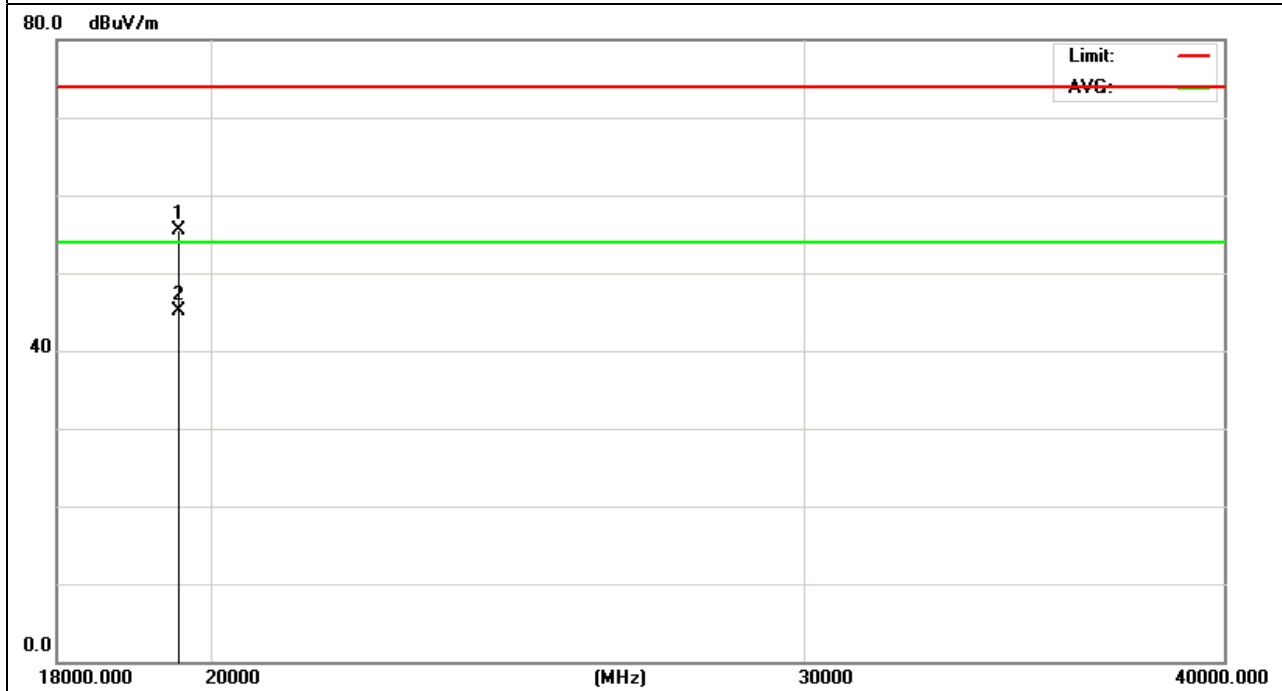

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 48	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1799.330	46.32	-9.34	36.98	74.00	-37.02	peak
2855.369	44.12	-2.58	41.54	74.00	-32.46	peak
3956.841	42.88	3.52	46.40	74.00	-27.60	peak
4355.447	45.65	4.45	50.10	74.00	-23.90	peak
6745.253	44.01	6.01	50.02	74.00	-23.98	peak
17887.007	32.05	24.76	56.81	74.00	-17.19	peak
17887.007	23.33	24.76	48.09	54.00	-5.91	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

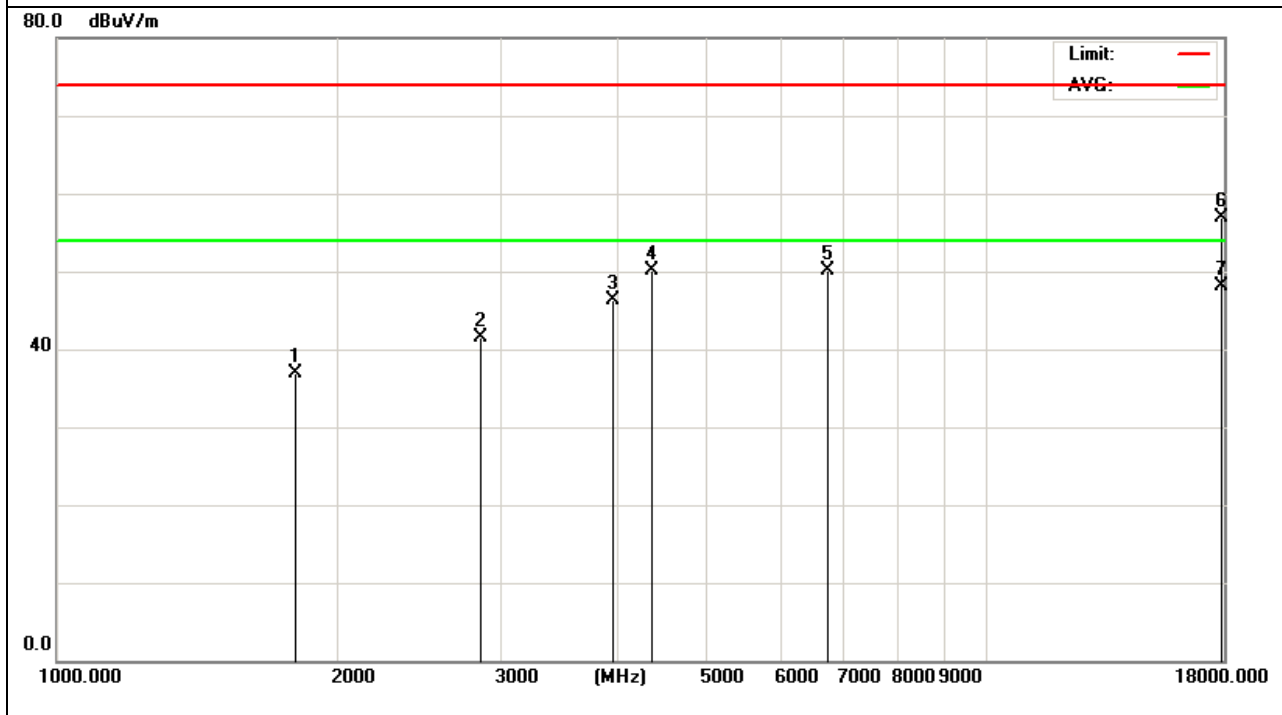

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 48	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1797.321	45.82	-9.35	36.47	74.00	-37.53	peak
3025.448	42.78	-1.62	41.16	74.00	-32.84	peak
4358.364	44.47	4.45	48.92	74.00	-25.08	peak
4866.151	43.97	5.13	49.10	74.00	-24.90	peak
8021.778	41.54	10.41	51.95	74.00	-22.05	peak
17788.695	34.25	24.83	59.08	74.00	-14.92	peak
17788.695	23.06	24.83	47.89	54.00	-6.11	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

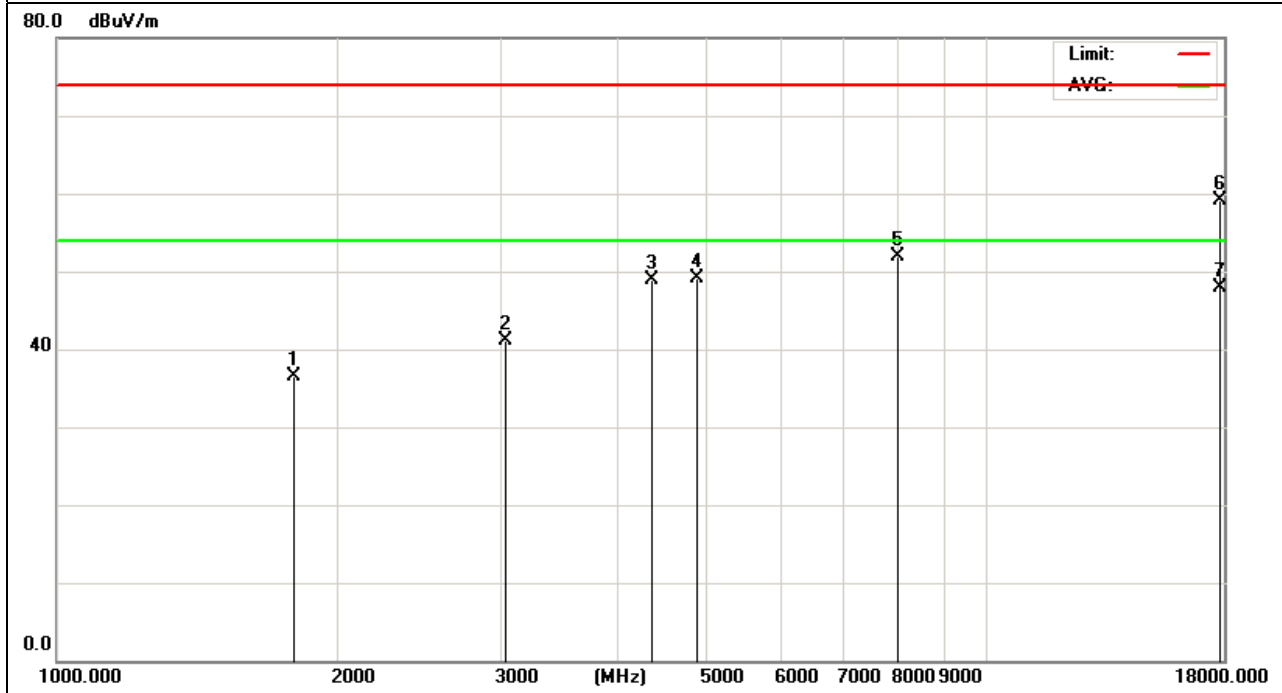

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 48	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18940.000	41.62	13.70	55.32	74.00	-18.68	peak
18940.000	32.55	13.70	46.25	54.00	-7.75	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

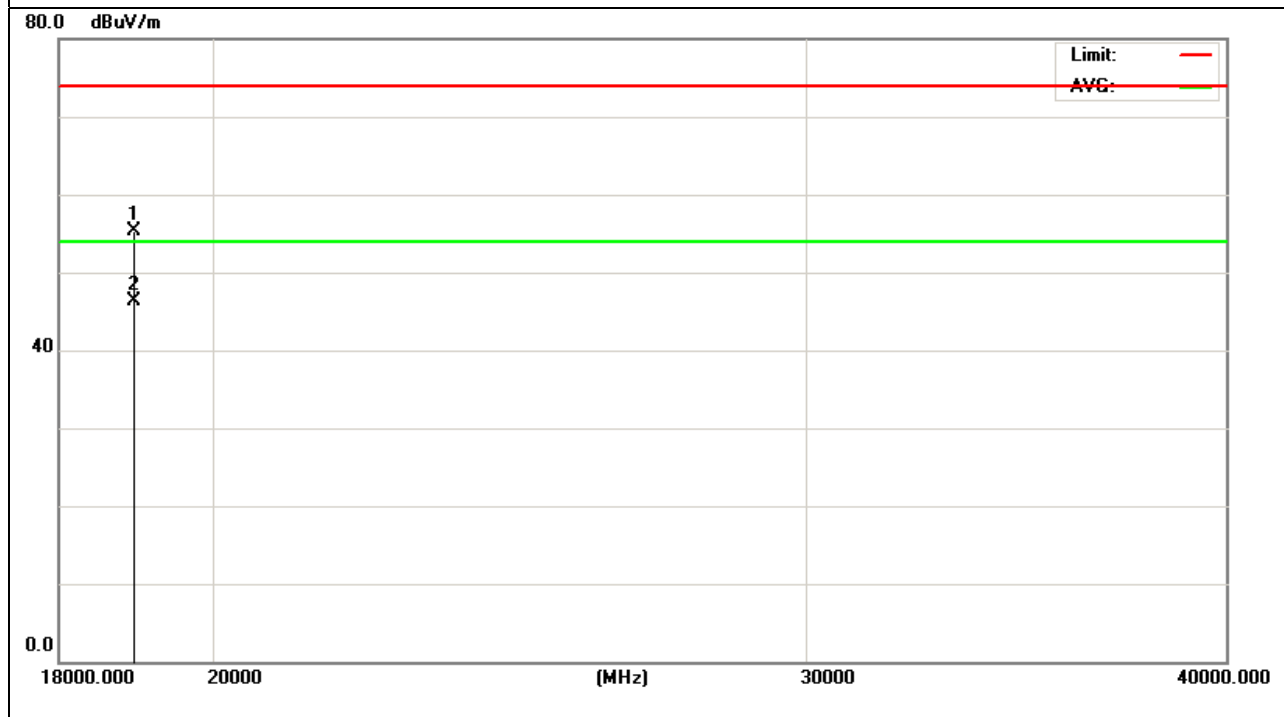

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 48	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20359.000	40.62	15.80	56.42	74.00	-17.58	peak
20359.000	31.22	15.80	47.02	54.00	-6.98	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

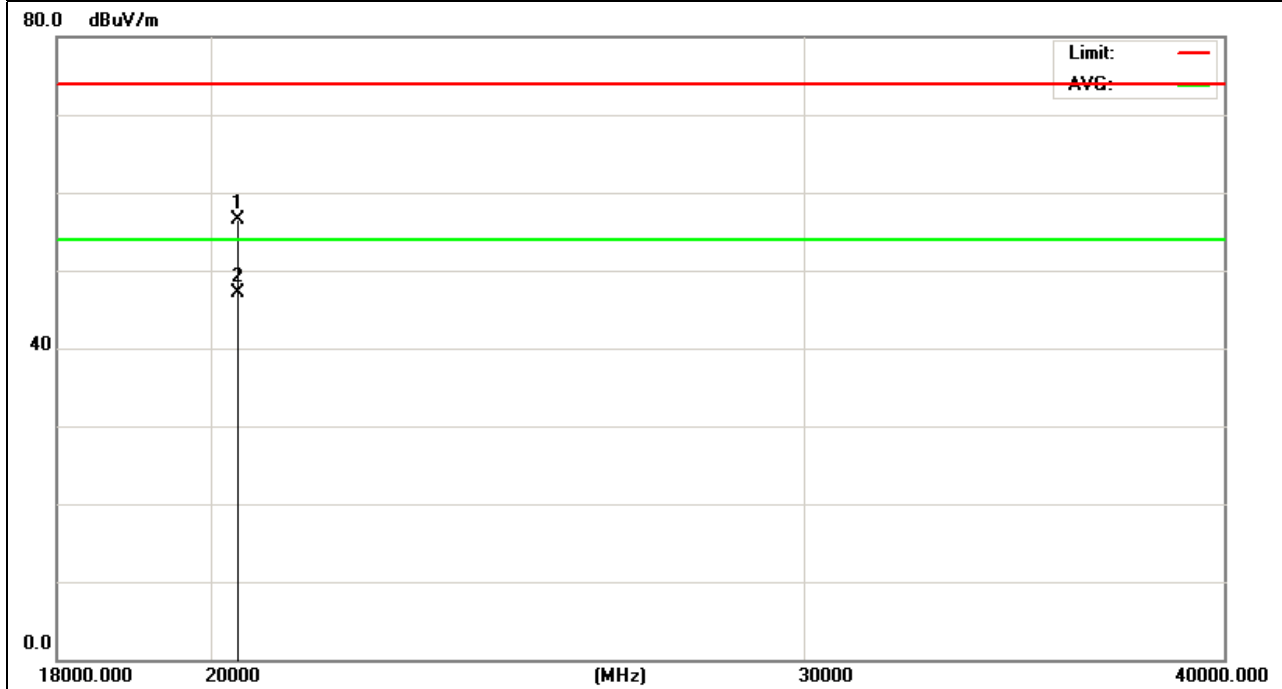

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 36	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1874.840	45.93	-9.48	36.45	74.00	-37.55	peak
2844.777	44.84	-2.64	42.20	74.00	-31.80	peak
3946.523	43.21	3.44	46.65	74.00	-27.35	peak
4366.882	45.84	4.46	50.30	74.00	-23.70	peak
6786.691	43.67	6.04	49.71	74.00	-24.29	peak
17747.355	32.94	24.85	57.79	74.00	-16.21	peak
17747.355	23.22	24.85	48.07	54.00	-5.93	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

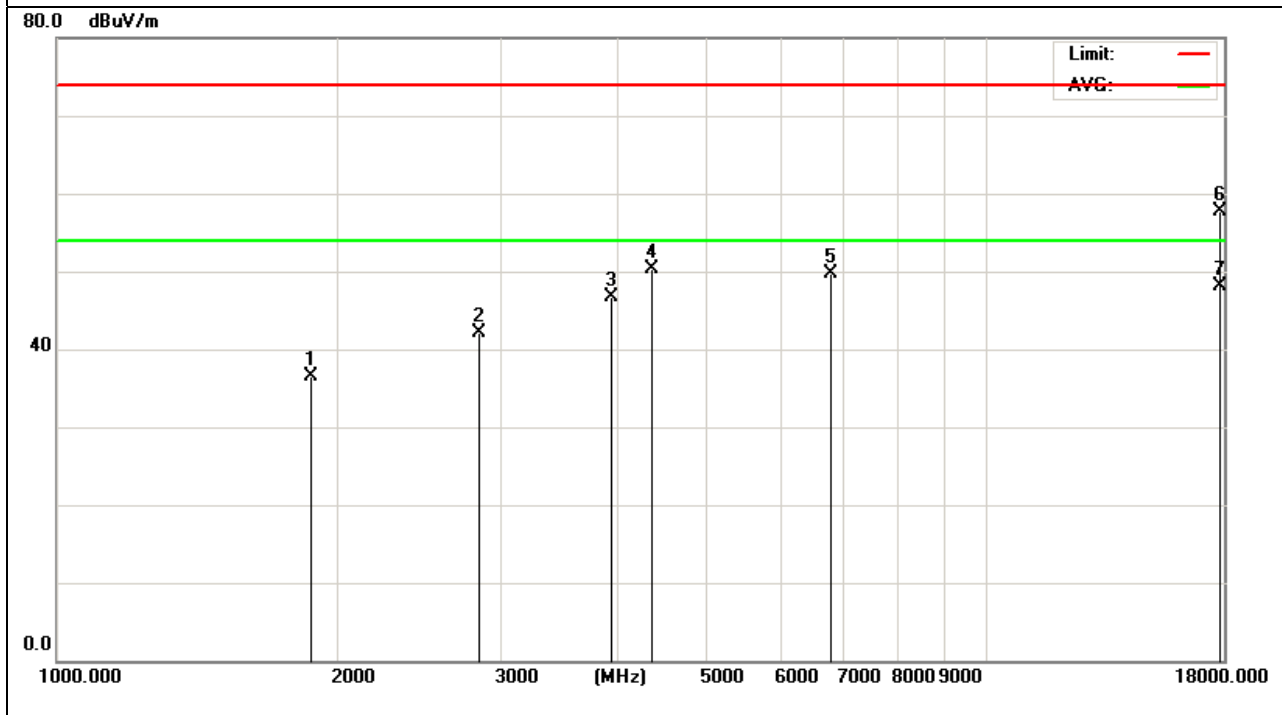

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 36	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1747.944	45.79	-9.49	36.30	74.00	-37.70	peak
3021.511	43.39	-1.63	41.76	74.00	-32.24	peak
4314.256	44.19	4.36	48.55	74.00	-25.45	peak
6880.194	42.88	6.11	48.99	74.00	-25.01	peak
8003.647	42.31	10.38	52.69	74.00	-21.31	peak
17784.669	32.65	24.83	57.48	74.00	-16.52	peak
17784.669	22.70	24.83	47.53	54.00	-6.47	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

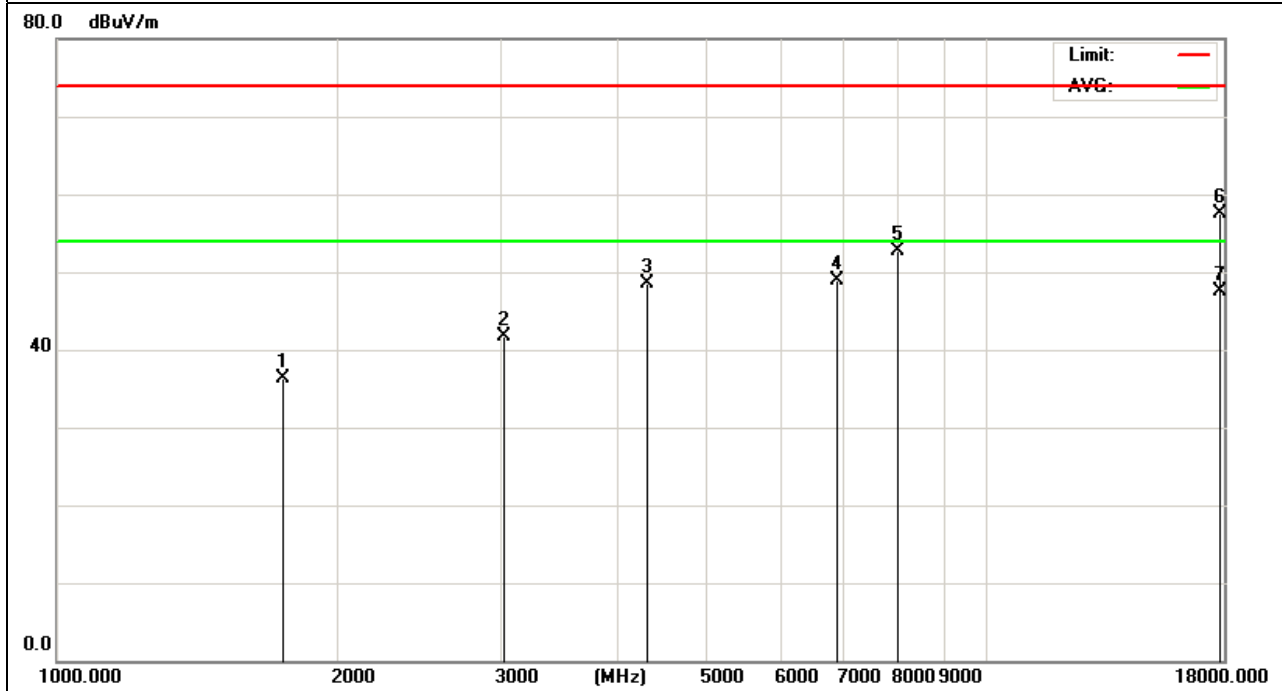

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 36	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
21215.000	38.59	17.07	55.66	74.00	-18.34	peak
21215.000	28.88	17.07	45.95	54.00	-8.05	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

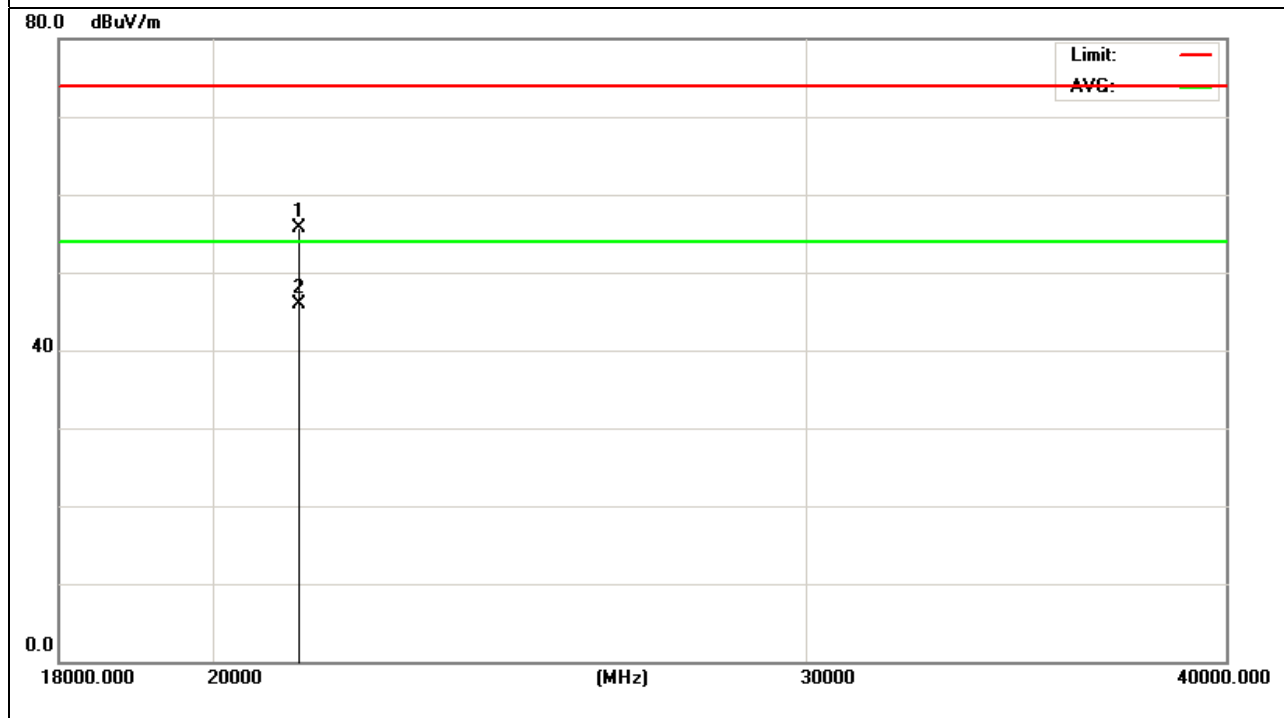

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 36	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20158.000	39.88	15.50	55.38	74.00	-18.62	peak
20158.000	30.64	15.50	46.14	54.00	-7.86	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

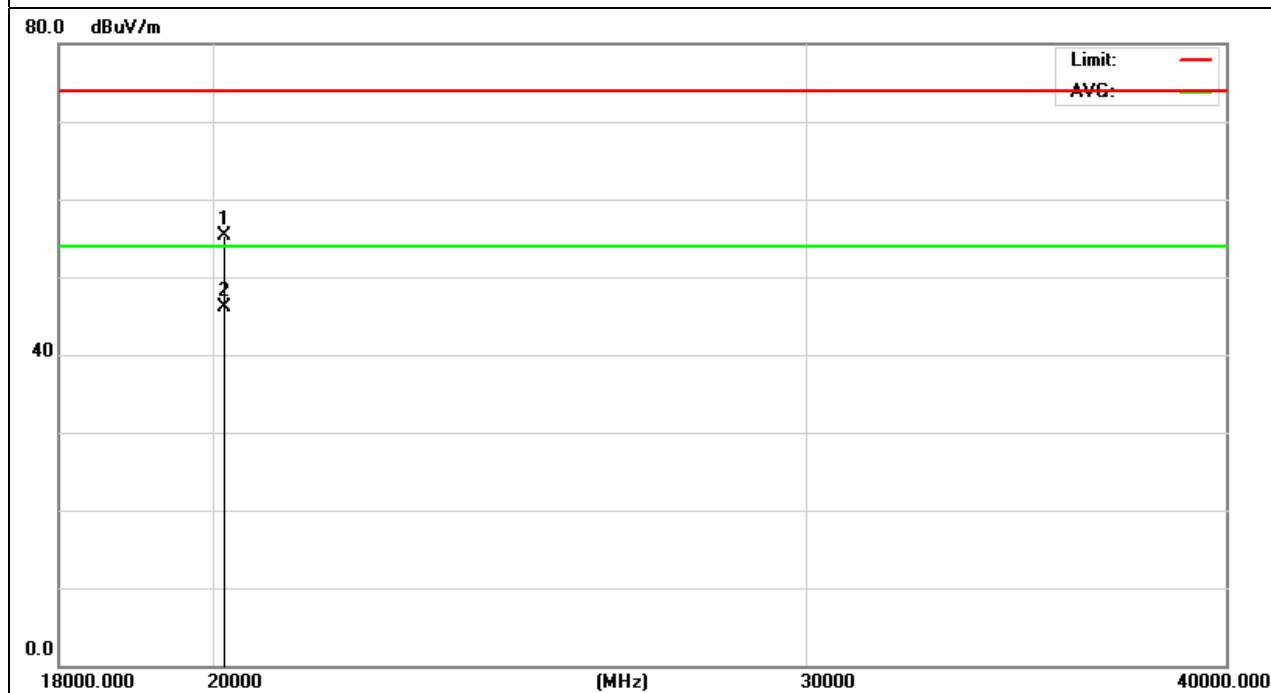

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 44	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1686.644	46.52	-9.67	36.85	74.00	-37.15	peak
2847.321	44.08	-2.63	41.45	74.00	-32.55	peak
3996.874	42.84	3.82	46.66	74.00	-27.34	peak
4366.762	45.39	4.46	49.85	74.00	-24.15	peak
6754.231	44.21	6.02	50.23	74.00	-23.77	peak
17790.011	32.67	24.82	57.49	74.00	-16.51	peak
17790.011	23.21	24.82	48.03	54.00	-5.97	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

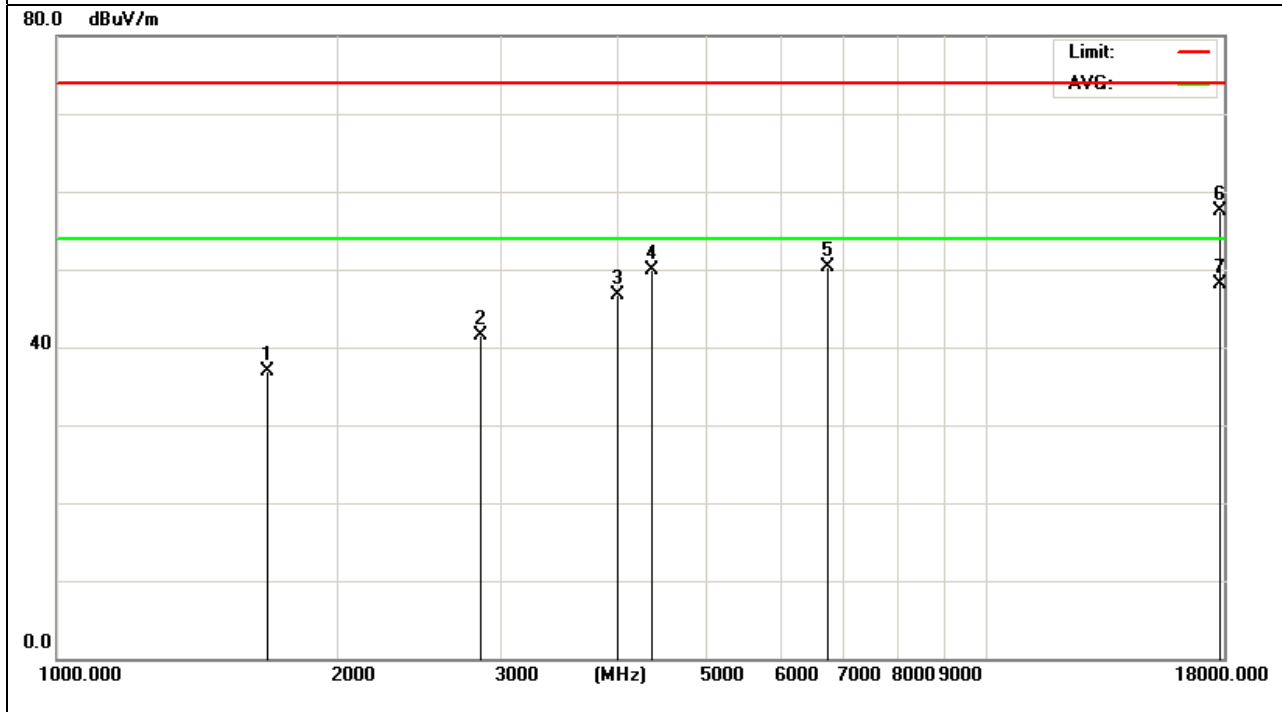

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 44	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1775.611	45.62	-9.41	36.21	74.00	-37.79	peak
3022.155	43.58	-1.62	41.96	74.00	-32.04	peak
4368.482	44.32	4.47	48.79	74.00	-25.21	peak
4854.941	43.54	5.11	48.65	74.00	-25.35	peak
8032.691	41.25	10.43	51.68	74.00	-22.32	peak
17786.621	33.25	24.83	58.08	74.00	-15.92	peak
17786.621	23.36	24.83	48.19	54.00	-5.81	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

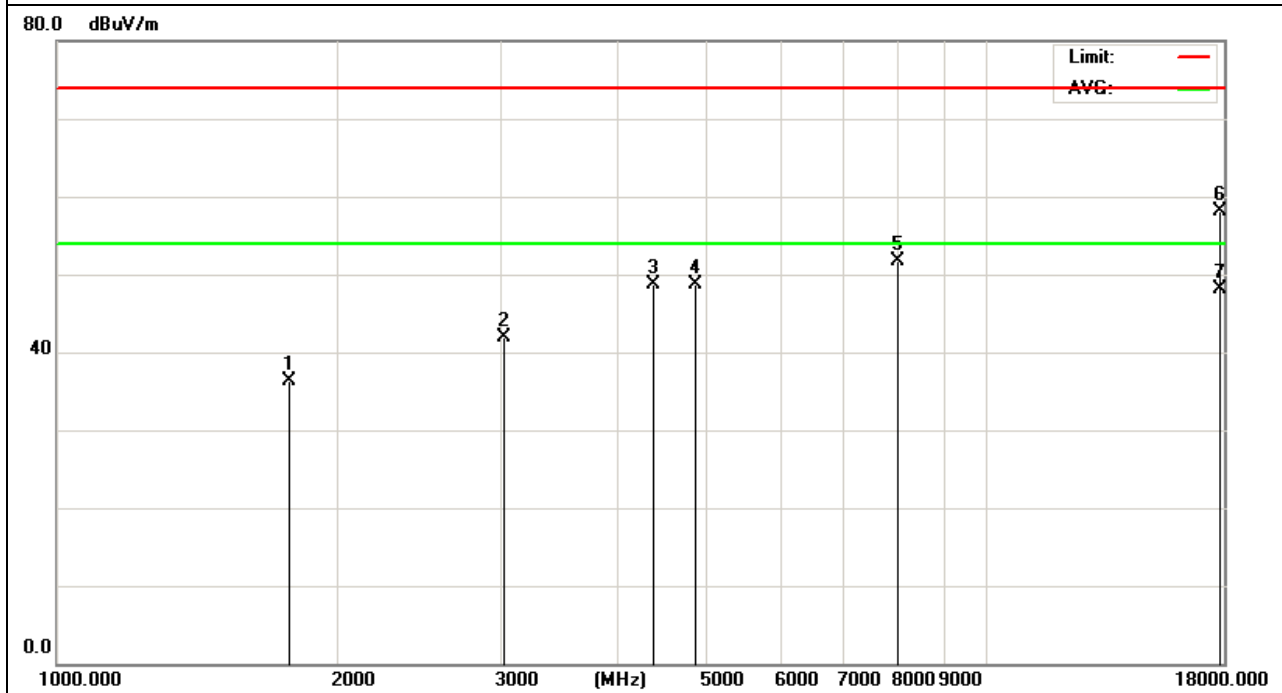

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 44	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
21112.000	39.36	16.92	56.28	74.00	-17.72	peak
21112.000	30.25	16.92	47.17	54.00	-6.83	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

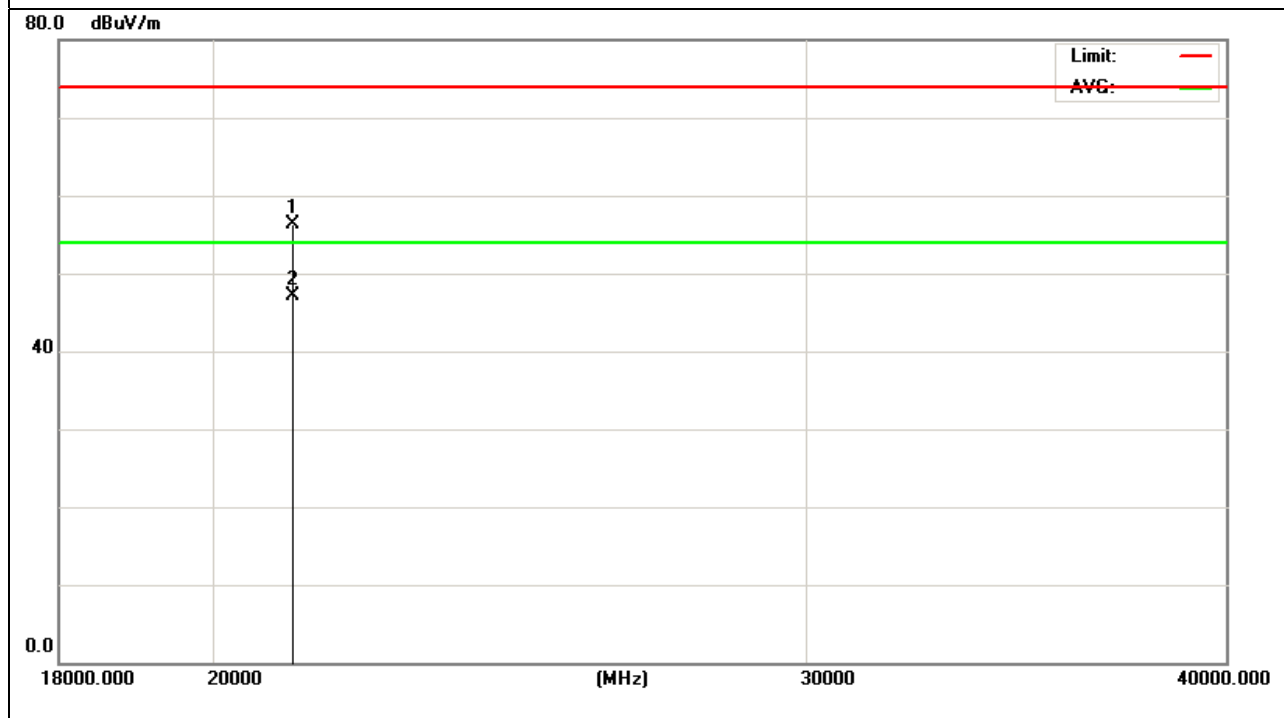

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 44	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18869.000	43.25	13.59	56.84	74.00	-17.16	peak
18869.000	32.68	13.59	46.27	54.00	-7.73	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

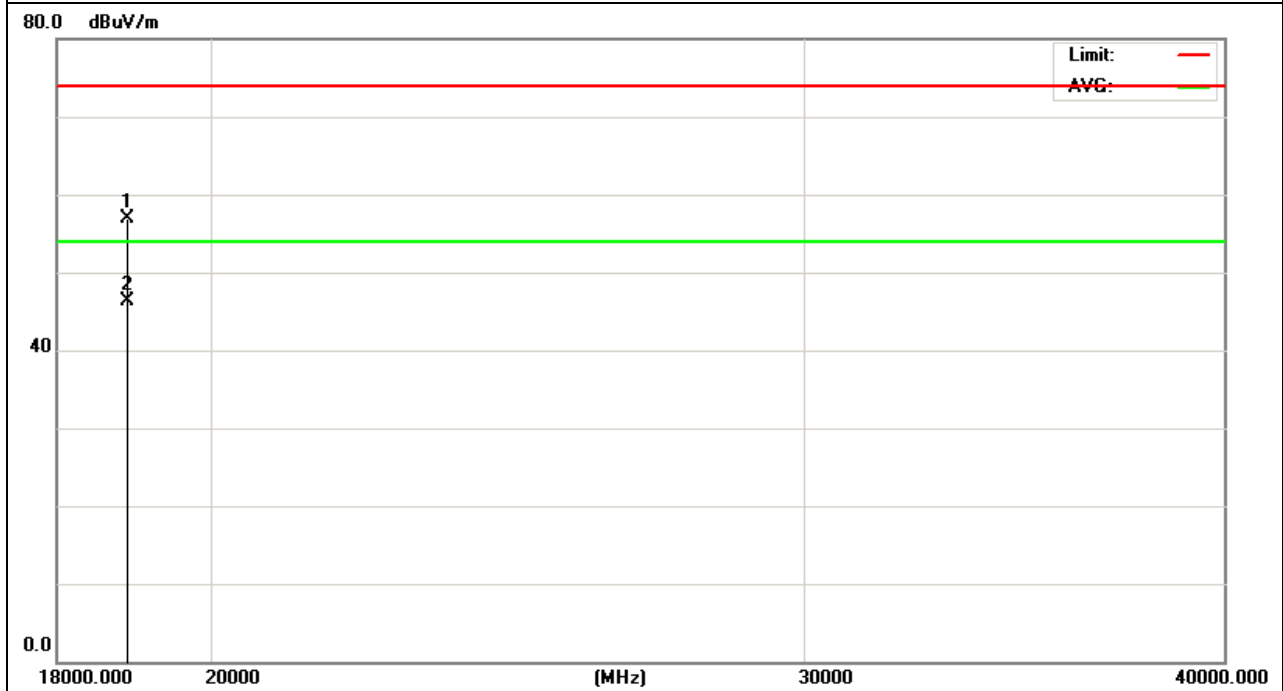

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 48	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1855.695	44.52	-9.44	35.08	74.00	-38.92	peak
2843.369	43.48	-2.64	40.84	74.00	-33.16	peak
3946.840	43.21	3.45	46.66	74.00	-27.34	peak
4368.714	44.36	4.47	48.83	74.00	-25.17	peak
6787.945	43.84	6.04	49.88	74.00	-24.12	peak
17788.942	32.84	24.83	57.67	74.00	-16.33	peak
17788.942	22.89	24.83	47.72	54.00	-6.28	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

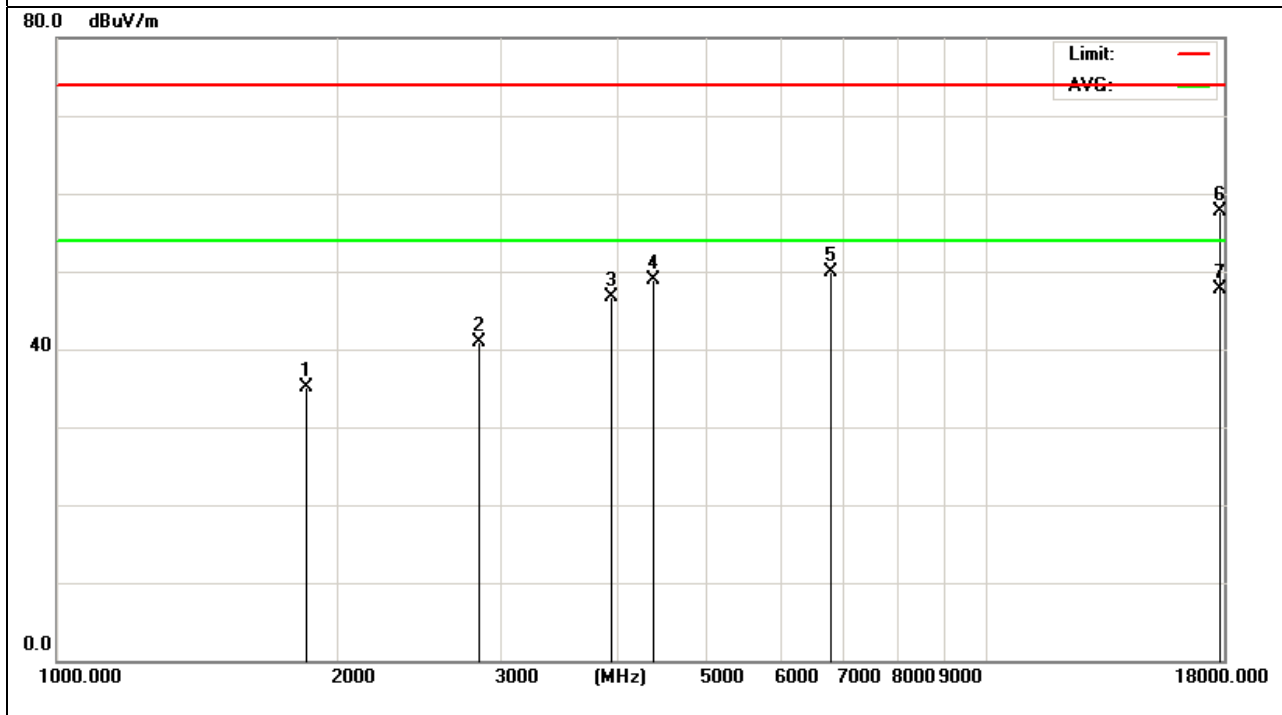

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 48	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1885.690	46.41	-9.49	36.92	74.00	-37.08	peak
3020.641	43.02	-1.63	41.39	74.00	-32.61	peak
4364.595	43.81	4.46	48.27	74.00	-25.73	peak
4886.691	43.62	5.14	48.76	74.00	-25.24	peak
8025.694	41.84	10.41	52.25	74.00	-21.75	peak
17895.669	33.64	24.75	58.39	74.00	-15.61	peak
17895.669	22.84	24.75	47.59	54.00	-6.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

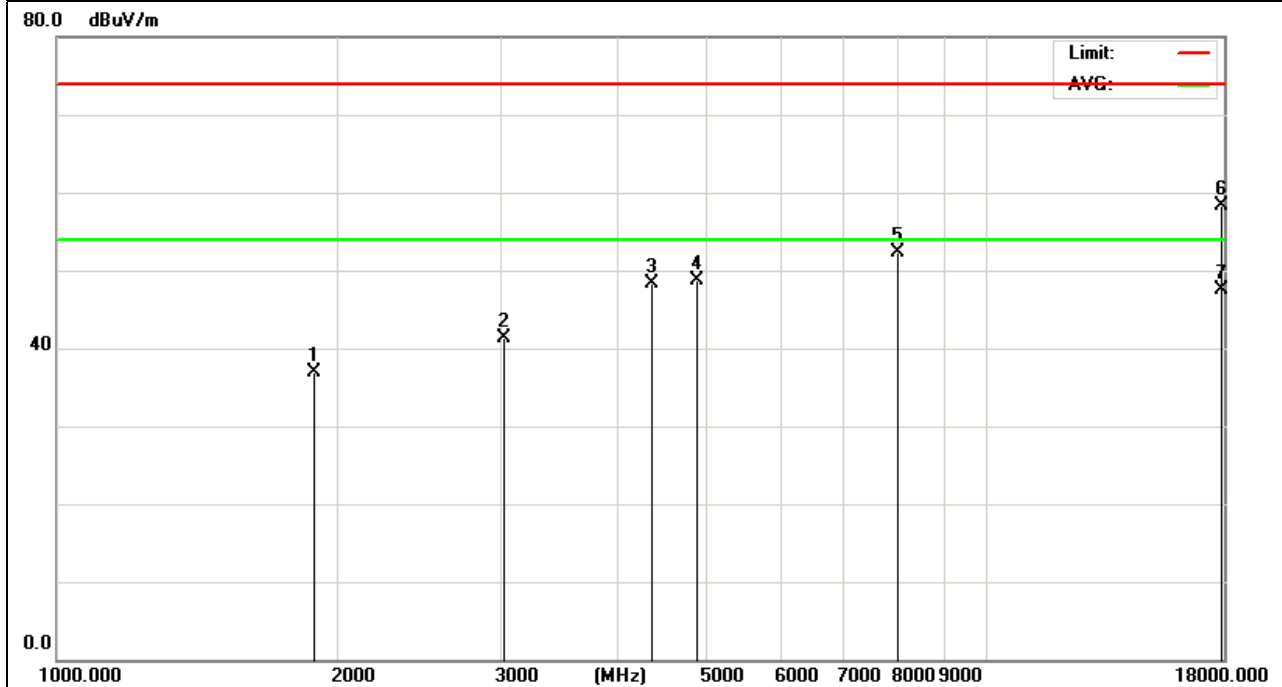

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 48	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19669.000	42.23	14.78	57.01	74.00	-16.99	peak
19669.000	30.74	14.78	45.52	54.00	-8.48	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 48	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19561.000	40.54	14.62	55.16	74.00	-18.84	peak
19561.000	30.26	14.62	44.88	54.00	-9.12	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

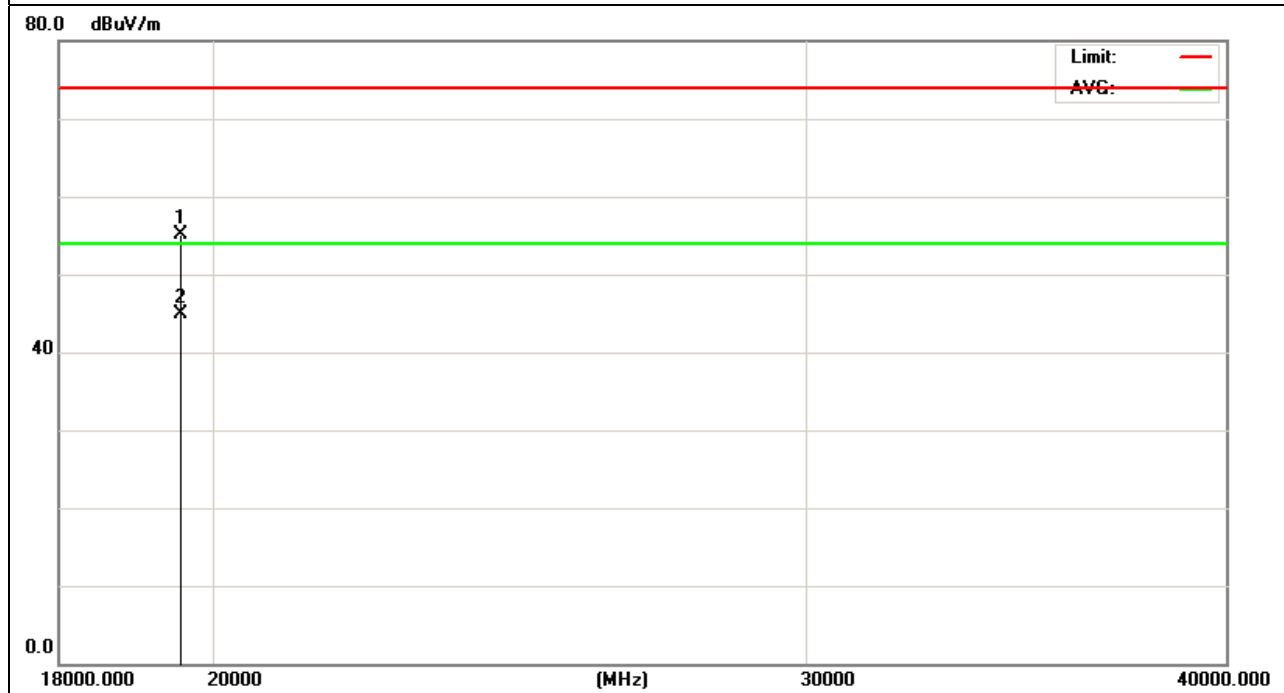

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 38	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1883.321	45.74	-9.50	36.24	74.00	-37.76	peak
2843.221	44.68	-2.64	42.04	74.00	-31.96	peak
3845.941	43.46	2.71	46.17	74.00	-27.83	peak
4334.558	45.71	4.40	50.11	74.00	-23.89	peak
6787.776	43.66	6.04	49.70	74.00	-24.30	peak
17654.551	32.59	24.92	57.51	74.00	-16.49	peak
17654.551	23.33	24.92	48.25	54.00	-5.75	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

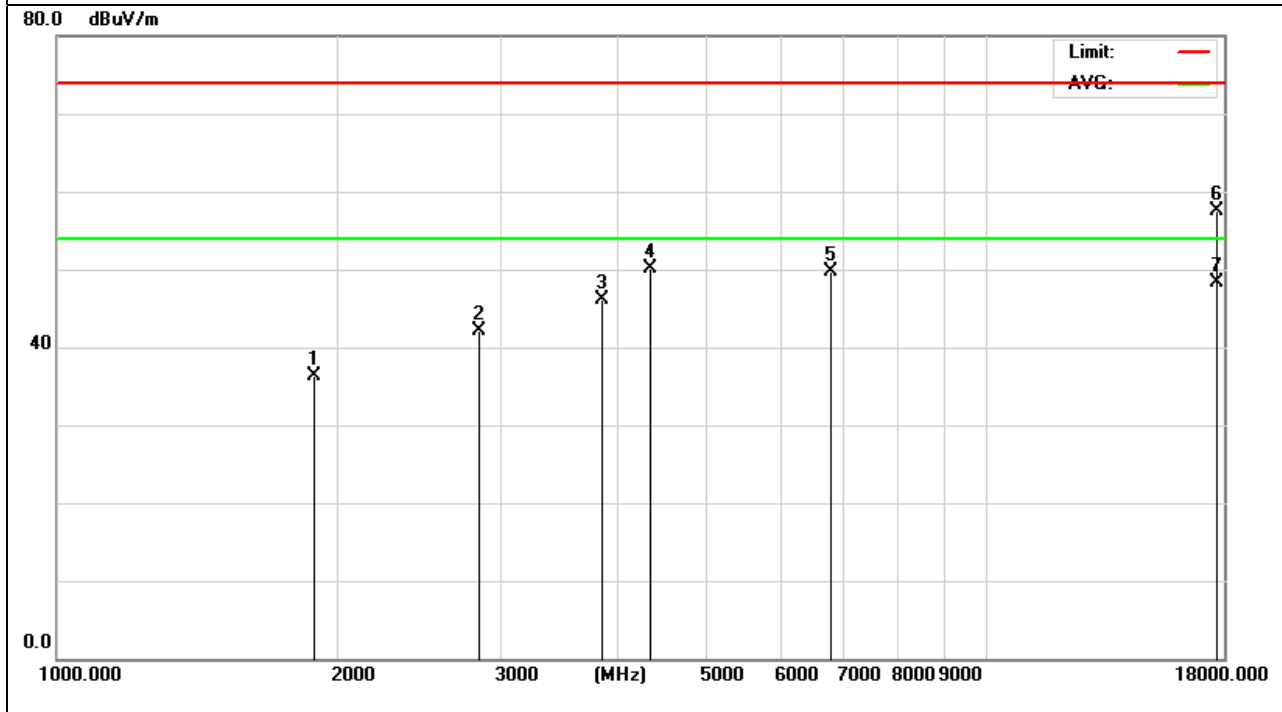

EUT :	Panel PC 平板电脑	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 38	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1788.664	46.30	-9.38	36.92	74.00	-37.08	peak
3010.119	43.02	-1.65	41.37	74.00	-32.63	peak
4354.874	44.22	4.45	48.67	74.00	-25.33	peak
6856.997	43.38	6.09	49.47	74.00	-24.53	peak
8020.332	42.66	10.41	53.07	74.00	-20.93	peak
17751.476	32.84	24.85	57.69	74.00	-16.31	peak
17751.476	22.39	24.85	47.24	54.00	-6.76	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

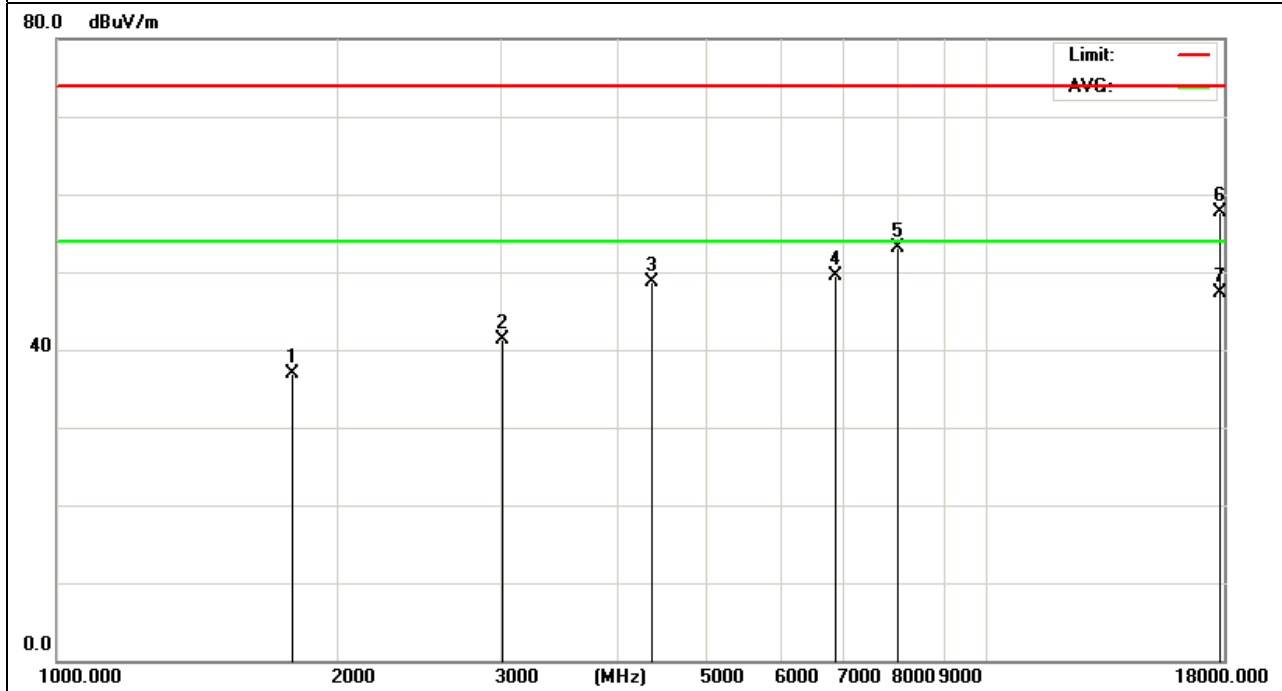

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 38	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19595.000	42.02	14.66	56.68	74.00	-17.32	peak
19595.000	30.64	14.66	45.30	54.00	-8.70	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

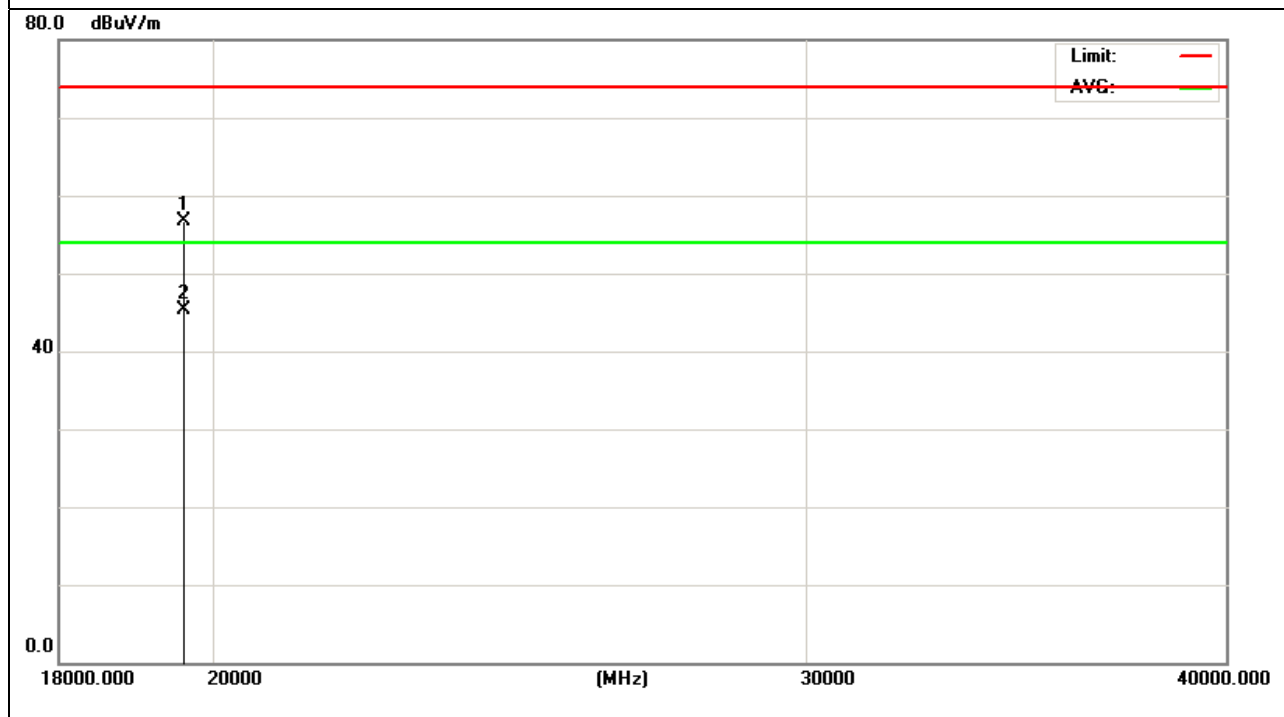

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 38	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20084.000	40.44	15.39	55.83	74.00	-18.17	peak
20084.000	30.39	15.39	45.78	54.00	-8.22	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

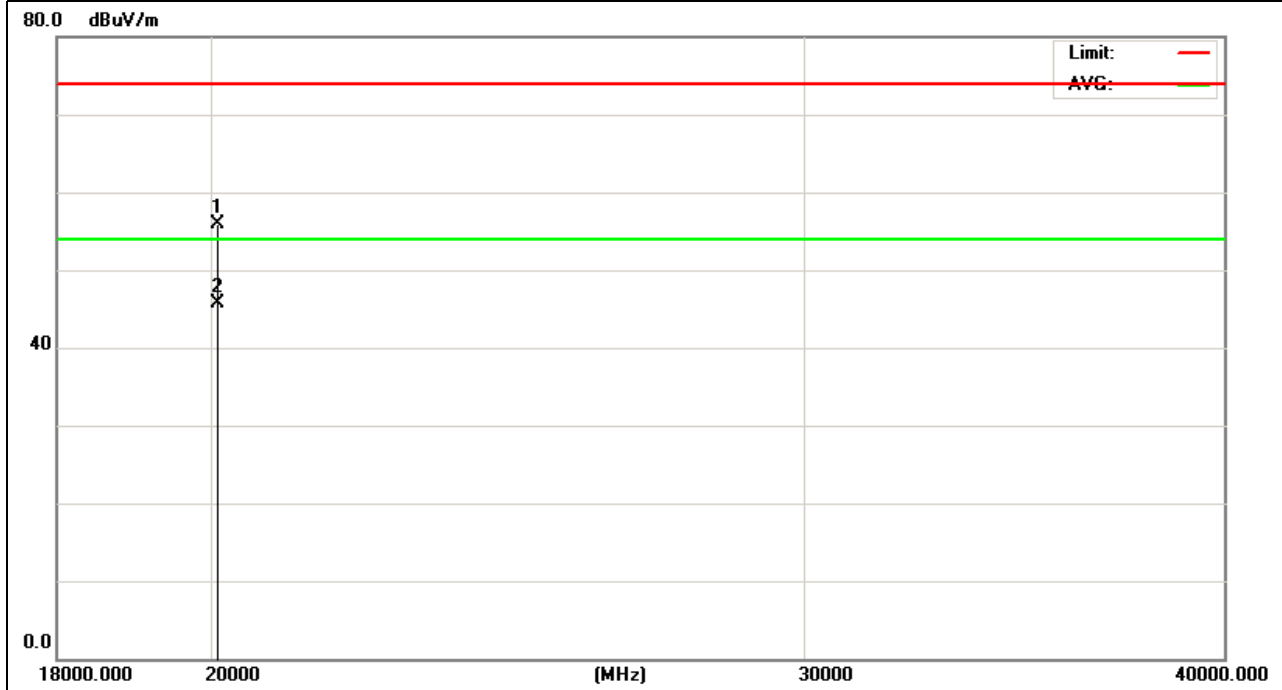

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 46	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1769.339	45.66	-9.43	36.23	74.00	-37.77	peak
2844.657	44.28	-2.64	41.64	74.00	-32.36	peak
3950.481	43.87	3.47	47.34	74.00	-26.66	peak
4383.788	44.66	4.50	49.16	74.00	-24.84	peak
6773.669	43.89	6.04	49.93	74.00	-24.07	peak
17785.624	32.58	24.83	57.41	74.00	-16.59	peak
17785.624	22.65	24.83	47.48	54.00	-6.52	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

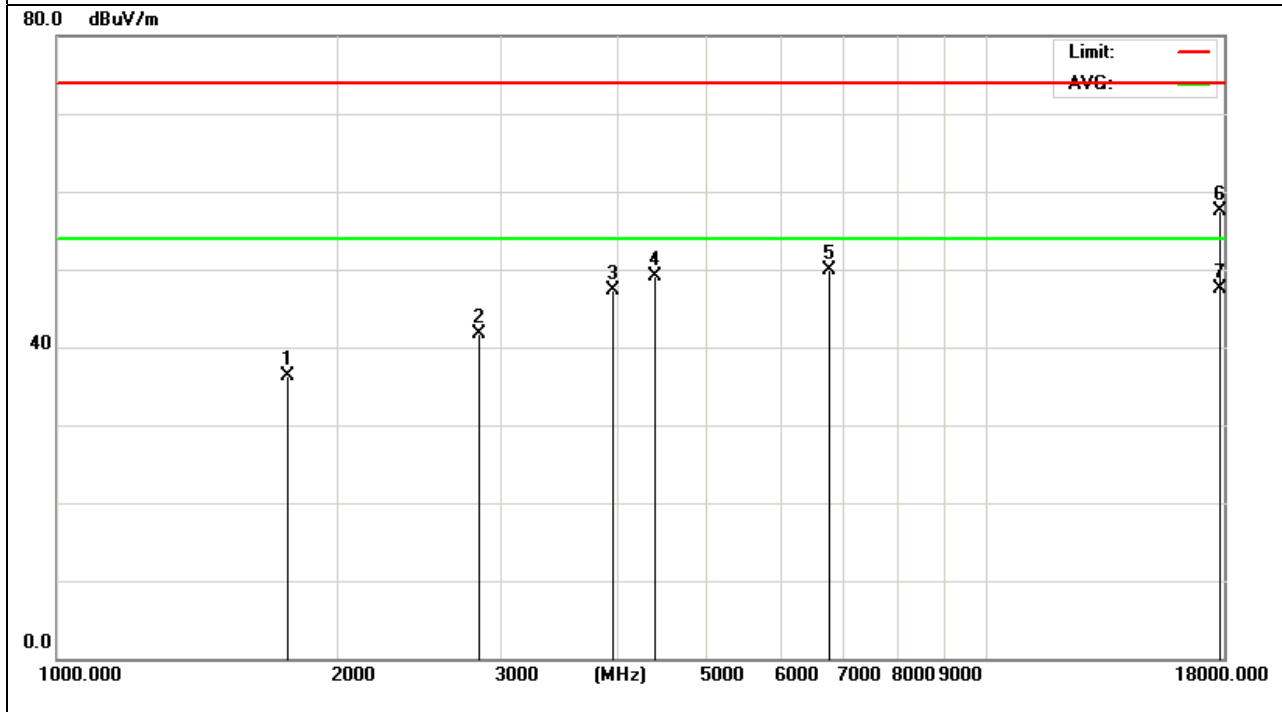

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 46	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1757.692	45.61	-9.46	36.15	74.00	-37.85	peak
3013.320	43.09	-1.65	41.44	74.00	-32.56	peak
4355.941	44.67	4.45	49.12	74.00	-24.88	peak
4865.327	43.87	5.13	49.00	74.00	-25.00	peak
8010.779	41.78	10.40	52.18	74.00	-21.82	peak
17735.331	34.26	24.87	59.13	74.00	-14.87	peak
17735.331	22.78	24.87	47.65	54.00	-6.35	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

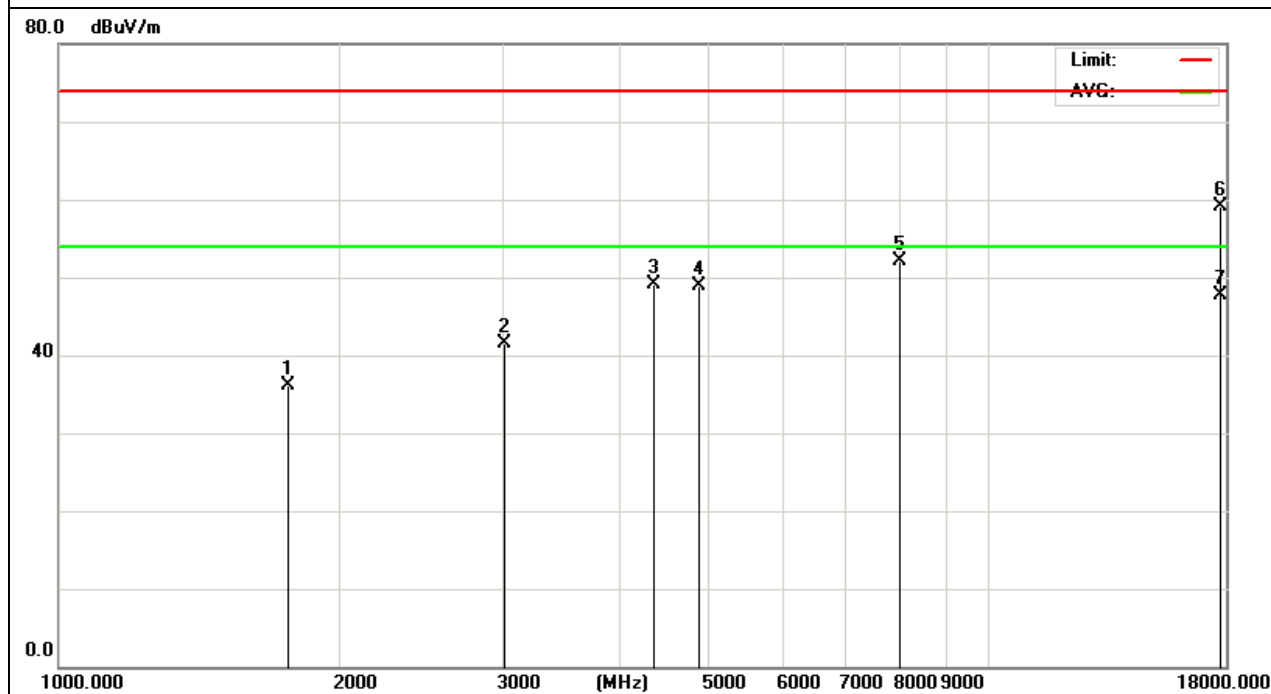

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 46	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20131.000	40.87	15.46	56.33	74.00	-17.67	peak
20131.000	30.55	15.46	46.01	54.00	-7.99	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

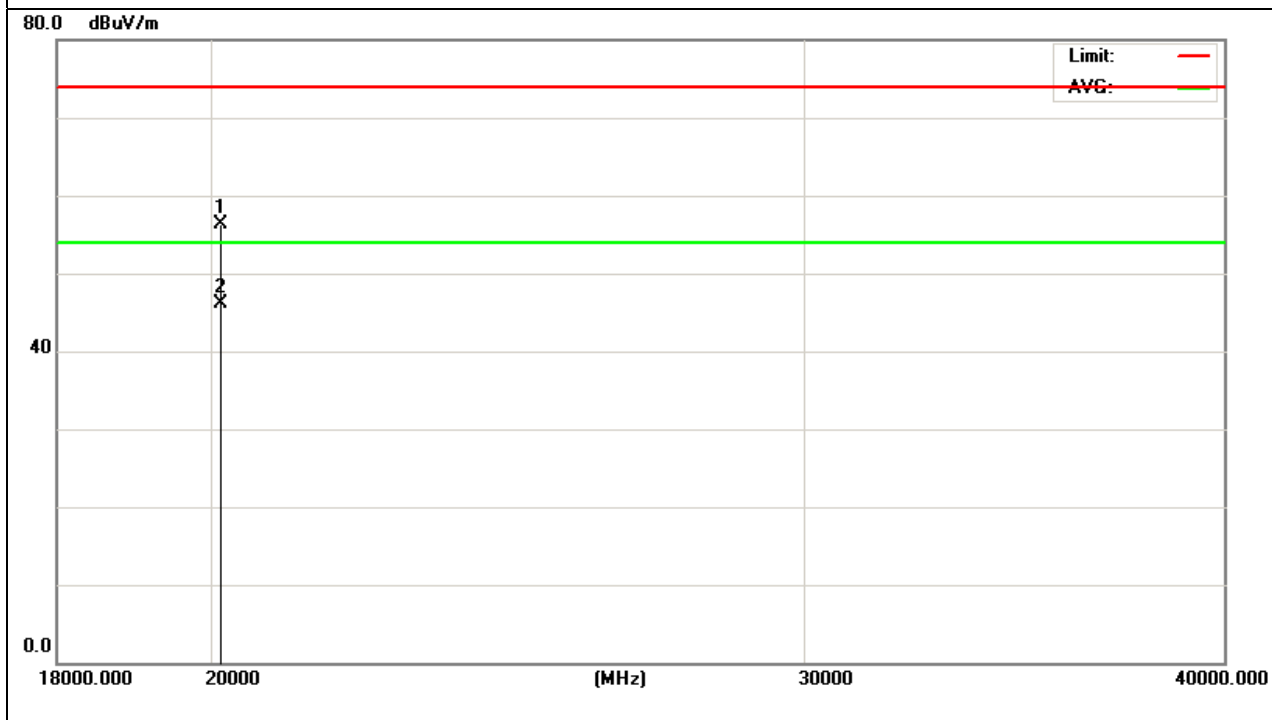

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 46	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18649.000	42.57	13.26	55.83	74.00	-18.17	peak
18649.000	31.33	13.26	44.59	54.00	-9.41	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

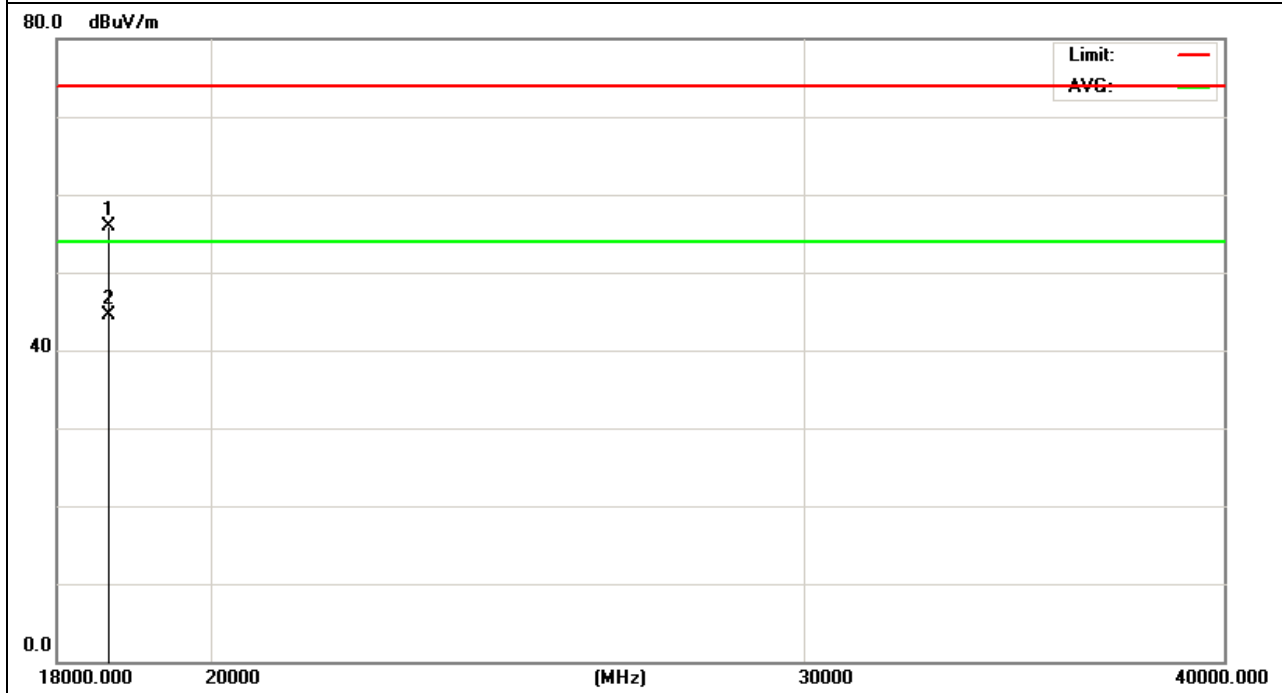

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 42	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1784.668	45.84	-9.39	36.45	74.00	-37.55	peak
2845.631	44.63	-2.64	41.99	74.00	-32.01	peak
3950.799	43.21	3.48	46.69	74.00	-27.31	peak
4357.491	45.01	4.45	49.46	74.00	-24.54	peak
6750.259	43.76	6.02	49.78	74.00	-24.22	peak
17781.331	32.81	24.84	57.65	74.00	-16.35	peak
17781.331	22.94	24.84	47.78	54.00	-6.22	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

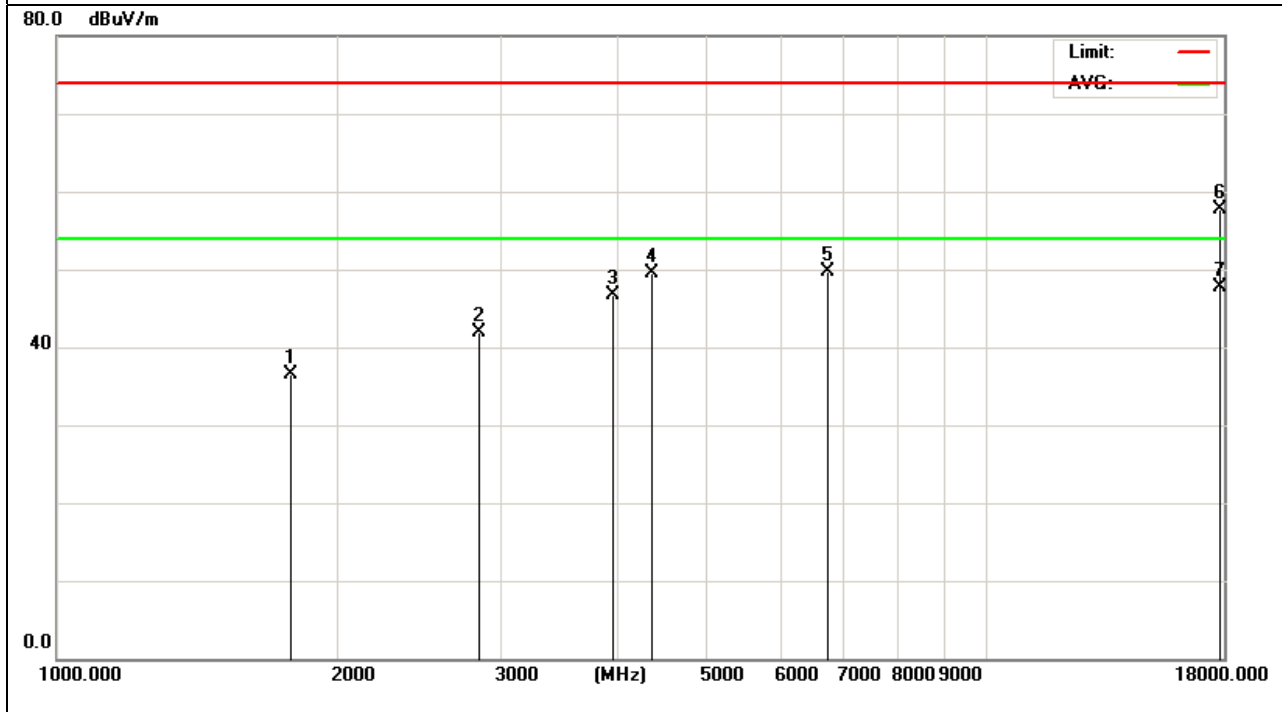

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11 ac80 Channel 42	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1770.621	46.03	-9.43	36.60	74.00	-37.40	peak
3045.982	42.84	-1.57	41.27	74.00	-32.73	peak
4370.776	43.99	4.47	48.46	74.00	-25.54	peak
4865.857	43.58	5.13	48.71	74.00	-25.29	peak
8011.174	40.68	10.40	51.08	74.00	-22.92	peak
17794.358	32.58	24.82	57.40	74.00	-16.60	peak
17794.358	23.32	24.82	48.14	54.00	-5.86	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

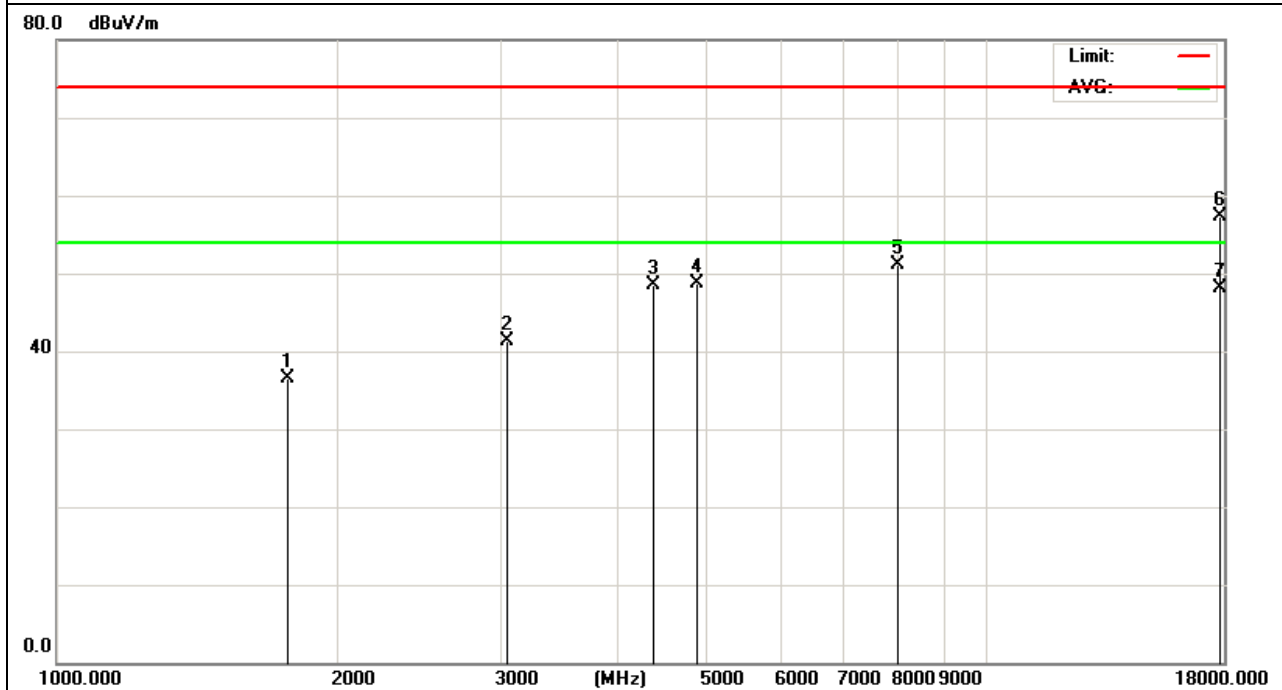

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 42	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
18661.000	41.78	13.28	55.06	74.00	-18.94	
18661.000	32.78	13.28	46.06	54.00	-7.94	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

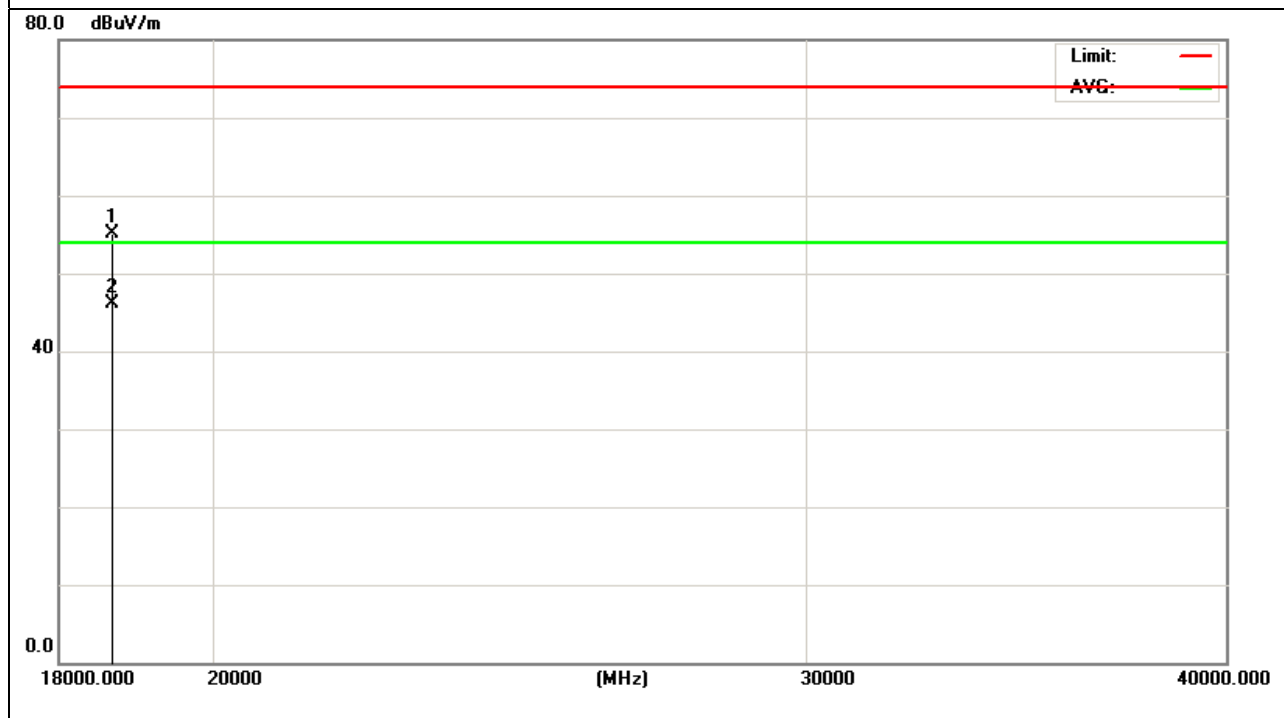

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11 ac80 Channel 42	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
19322.000	42.66	14.26	56.92	74.00	-17.08	peak
19322.000	31.02	14.26	45.28	54.00	-8.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

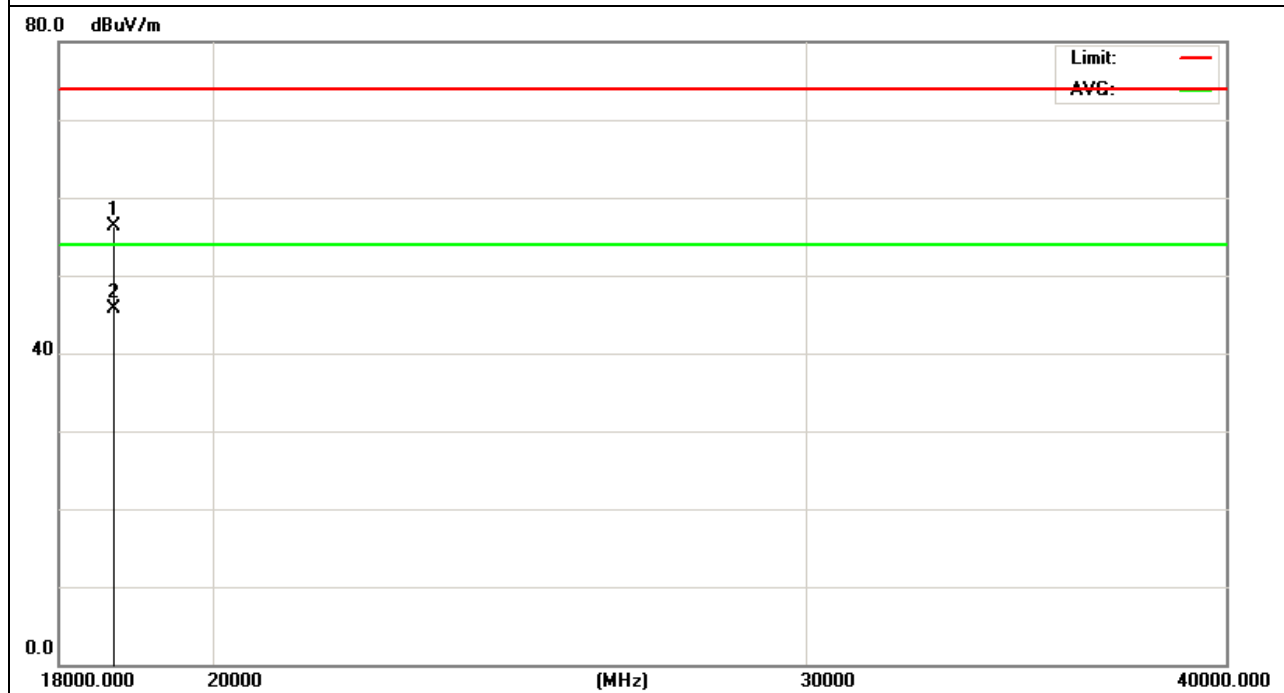


5.25MHz~5.35MHz:

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 52	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1673.658	46.21	-9.70	36.51	74.00	-37.49	peak
2844.287	43.99	-2.64	41.35	74.00	-32.65	peak
3955.623	42.43	3.51	45.94	74.00	-28.06	peak
4355.778	45.71	4.45	50.16	74.00	-23.84	peak
6795.492	43.74	6.04	49.78	74.00	-24.22	peak
17764.330	32.66	24.84	57.50	74.00	-16.50	peak
17764.330	23.41	24.84	48.25	54.00	-5.75	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

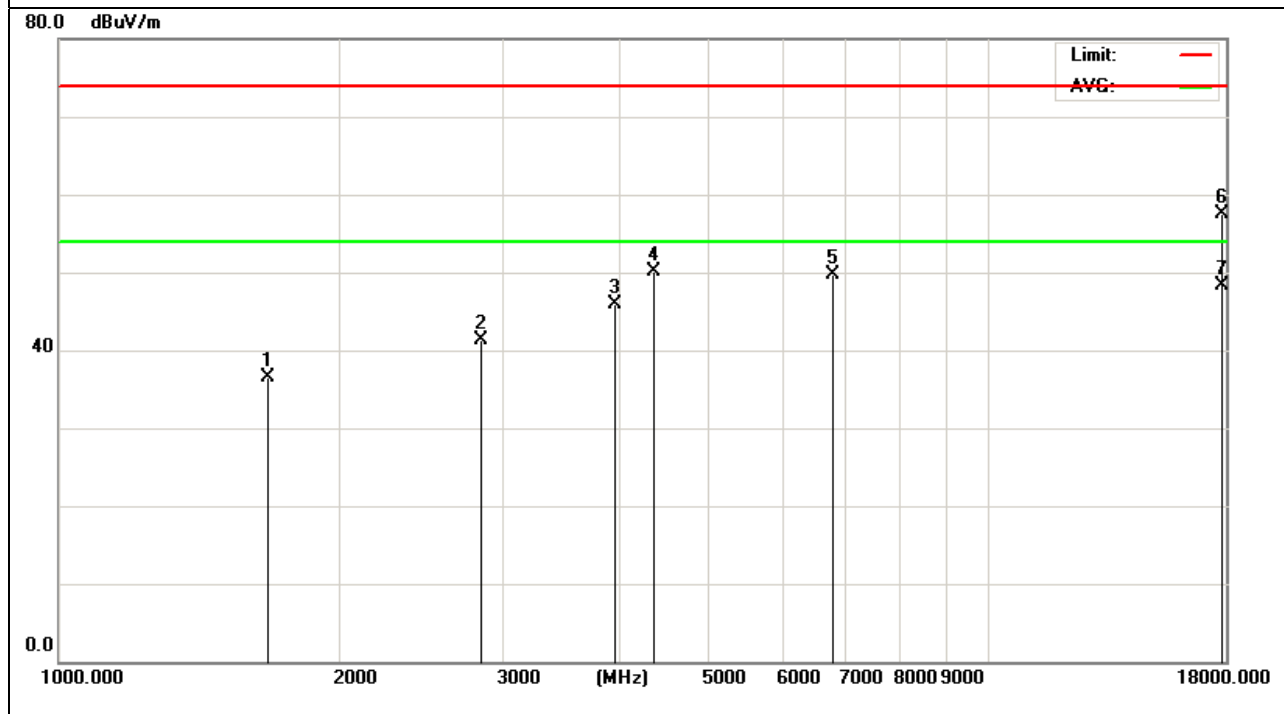

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 52	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1659.337	45.87	-9.74	36.13	74.00	-37.87	peak
3024.625	43.25	-1.62	41.63	74.00	-32.37	peak
4354.994	44.81	4.45	49.26	74.00	-24.74	peak
6835.307	43.68	6.07	49.75	74.00	-24.25	peak
8021.149	40.93	10.41	51.34	74.00	-22.66	peak
17698.337	34.21	24.90	59.11	74.00	-14.89	peak
17698.337	23.08	24.90	47.98	54.00	-6.02	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

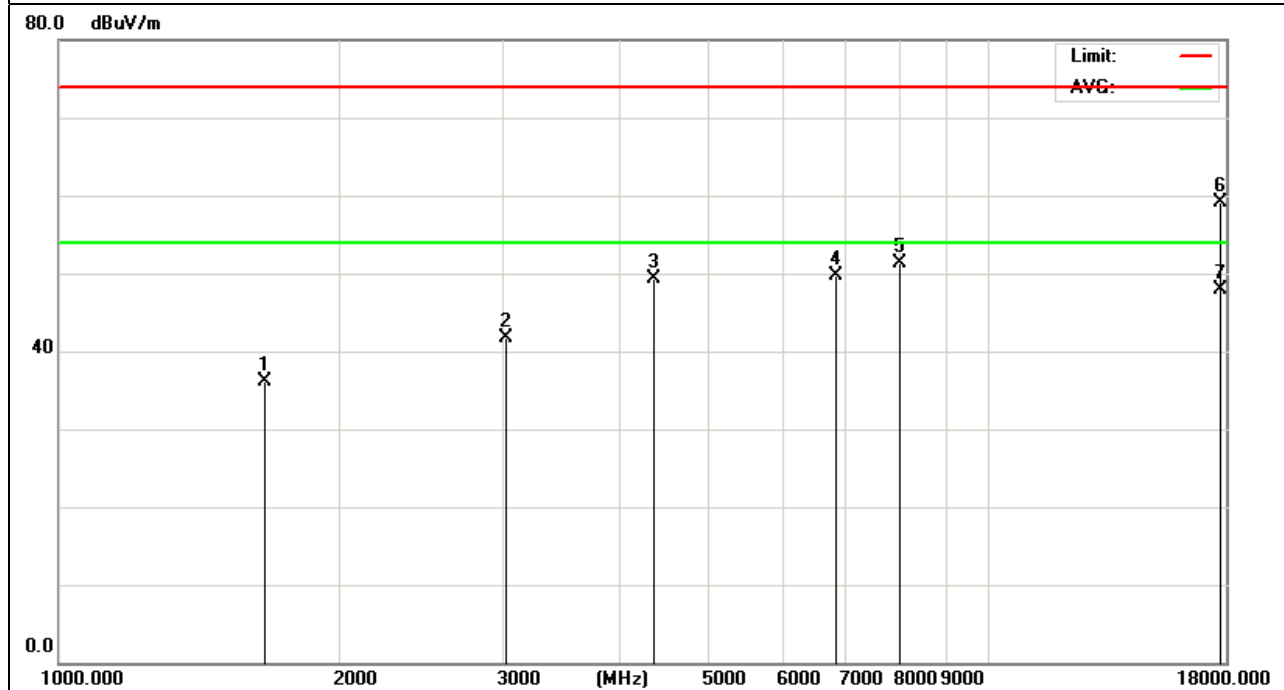

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 52	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20644.000	40.25	16.23	56.48	74.00	-17.52	peak
20644.000	30.15	16.23	46.38	54.00	-7.62	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

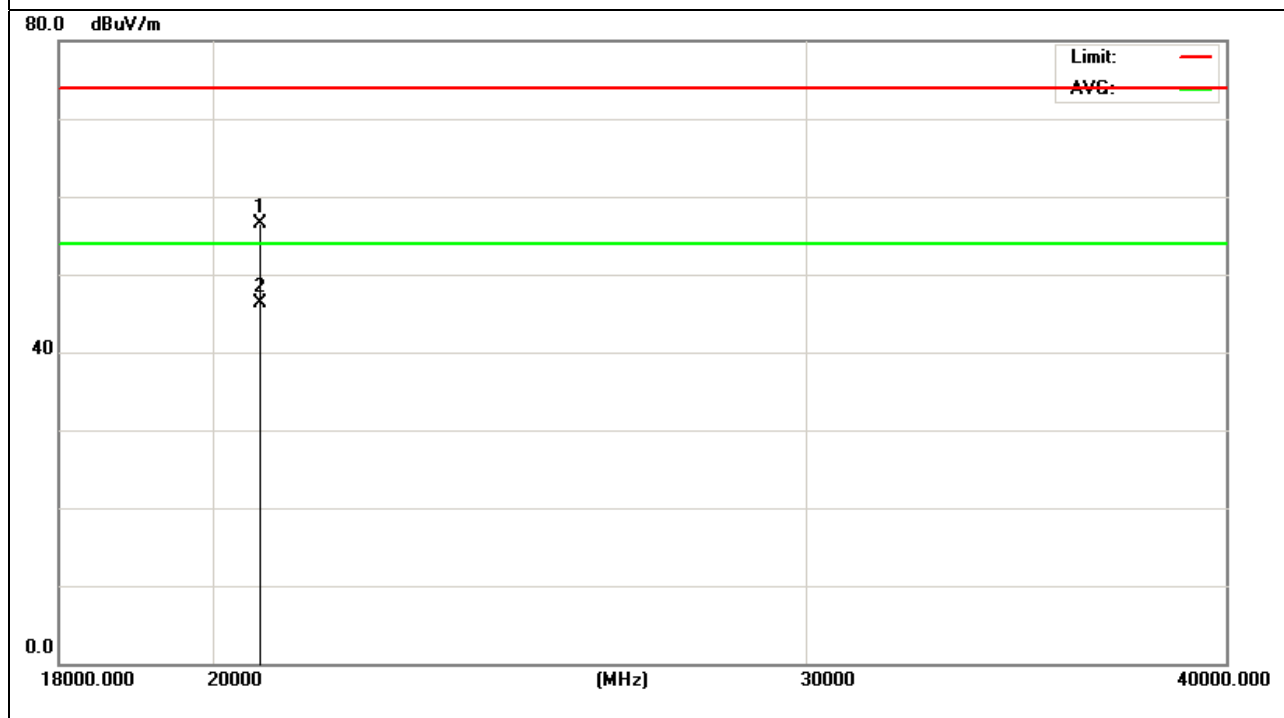

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 52	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18399.000	42.25	12.89	55.14	74.00	-18.86	peak
18399.000	32.41	12.89	45.30	54.00	-8.70	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

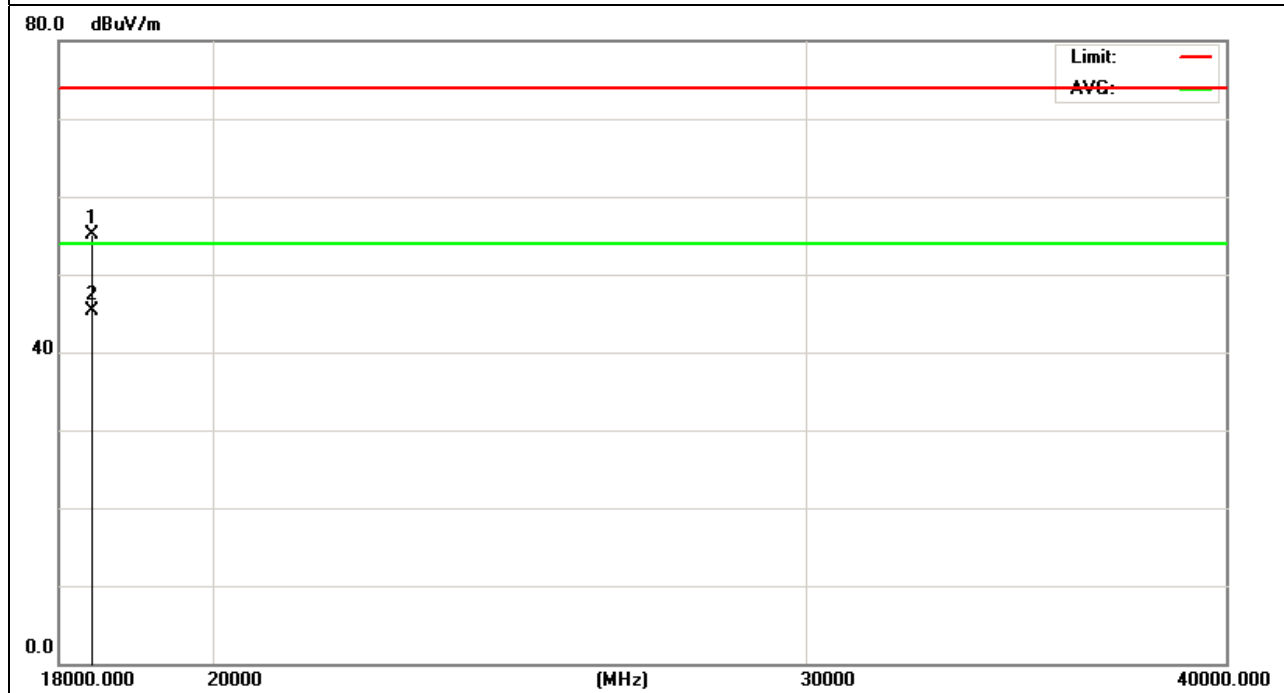

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 56	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1576.520	45.84	-9.88	35.96	74.00	-38.04	peak
2846.692	45.02	-2.63	42.39	74.00	-31.61	peak
3965.625	43.21	3.59	46.80	74.00	-27.20	peak
4357.662	45.34	4.45	49.79	74.00	-24.21	peak
6821.340	44.56	6.07	50.63	74.00	-23.37	peak
17886.320	33.37	24.76	58.13	74.00	-15.87	peak
17886.320	23.21	24.76	47.97	54.00	-6.03	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

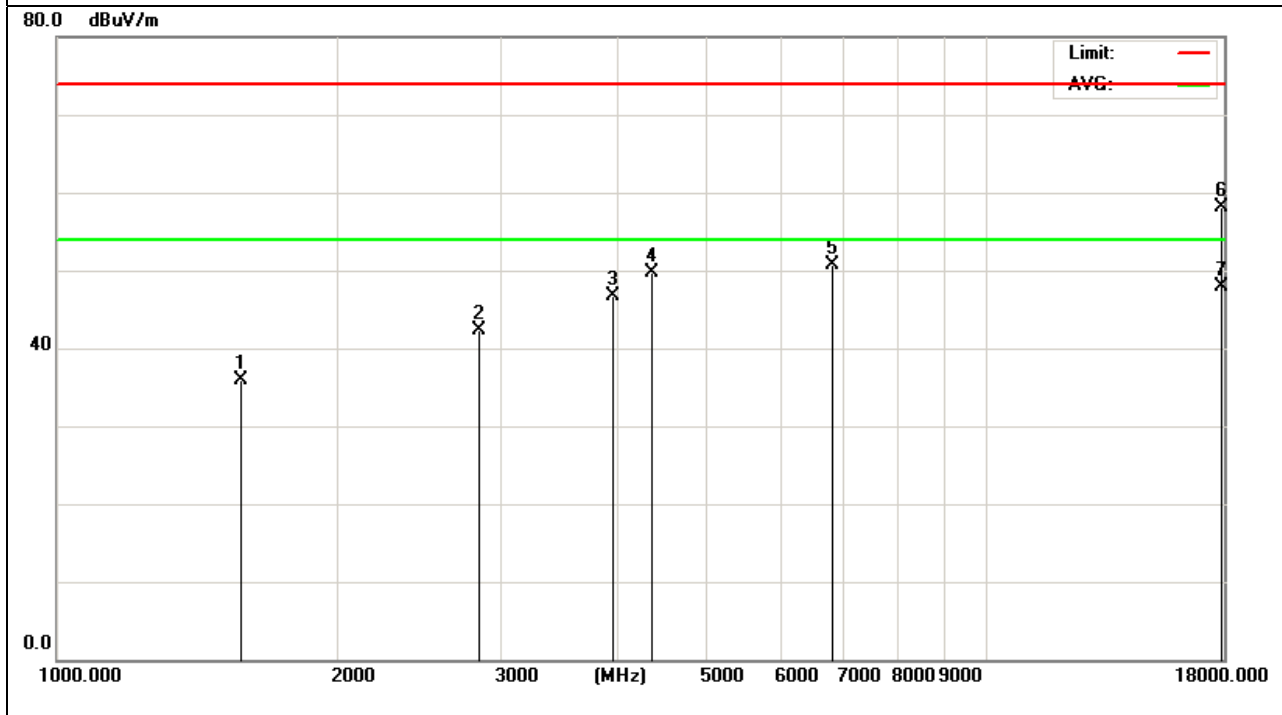

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 56	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1778.636	46.23	-9.40	36.83	74.00	-37.17	peak
3016.482	42.89	-1.64	41.25	74.00	-32.75	peak
4356.218	43.32	4.45	47.77	74.00	-26.23	peak
4865.329	44.19	5.13	49.32	74.00	-24.68	peak
8016.634	41.02	10.40	51.42	74.00	-22.58	peak
17789.496	33.48	24.83	58.31	74.00	-15.69	peak
17789.496	22.36	24.83	47.19	54.00	-6.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

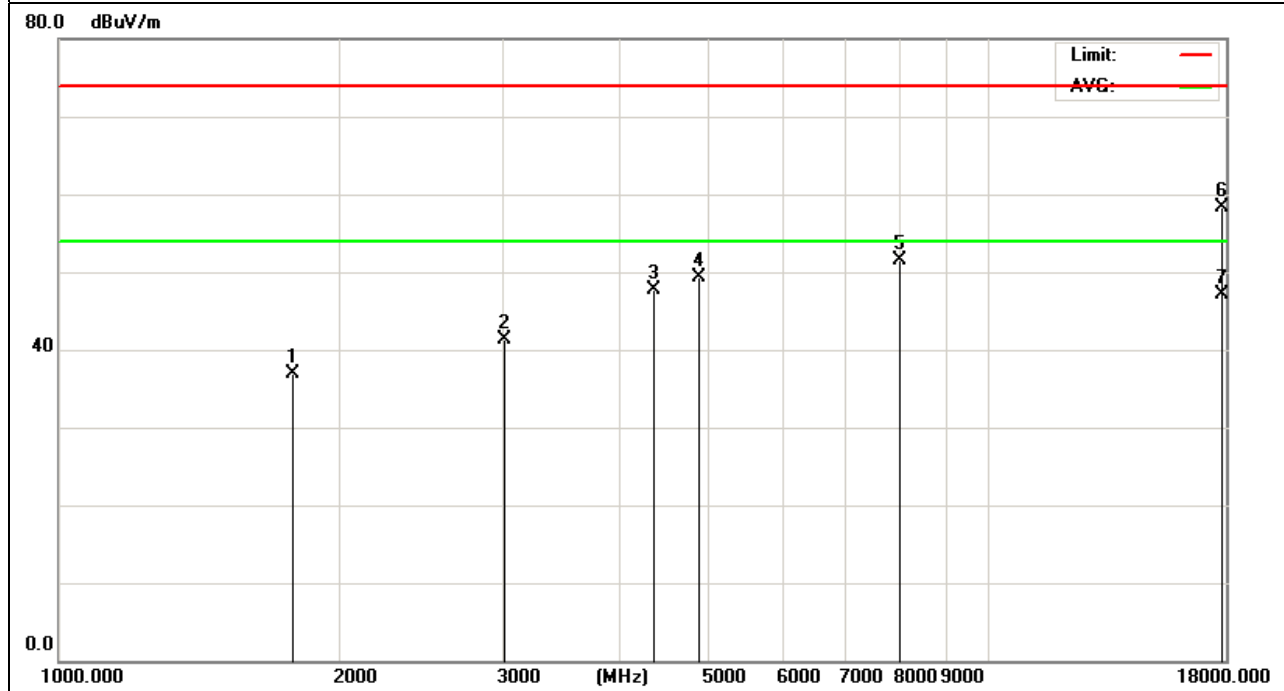

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 56	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18786.000	41.02	13.46	54.48	74.00	-19.52	peak
18786.000	32.35	13.46	45.81	54.00	-8.19	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 56	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20264.000	40.69	15.66	56.35	74.00	-17.65	peak
20264.000	31.42	15.66	47.08	54.00	-6.92	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

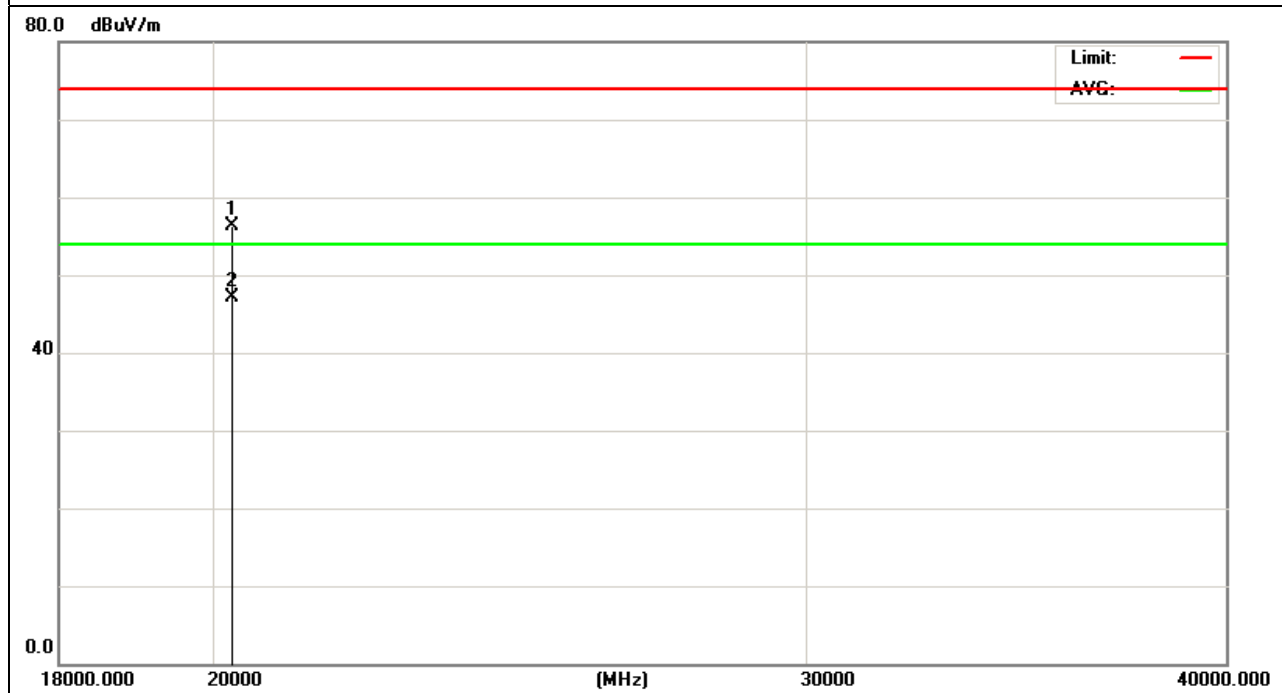

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 64	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1725.394	45.87	-9.55	36.32	74.00	-37.68	peak
2849.695	44.64	-2.61	42.03	74.00	-31.97	peak
3955.554	43.41	3.51	46.92	74.00	-27.08	peak
4366.221	45.02	4.46	49.48	74.00	-24.52	peak
6781.332	44.11	6.04	50.15	74.00	-23.85	peak
17756.001	32.58	24.85	57.43	74.00	-16.57	peak
17756.001	23.30	24.85	48.15	54.00	-5.85	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

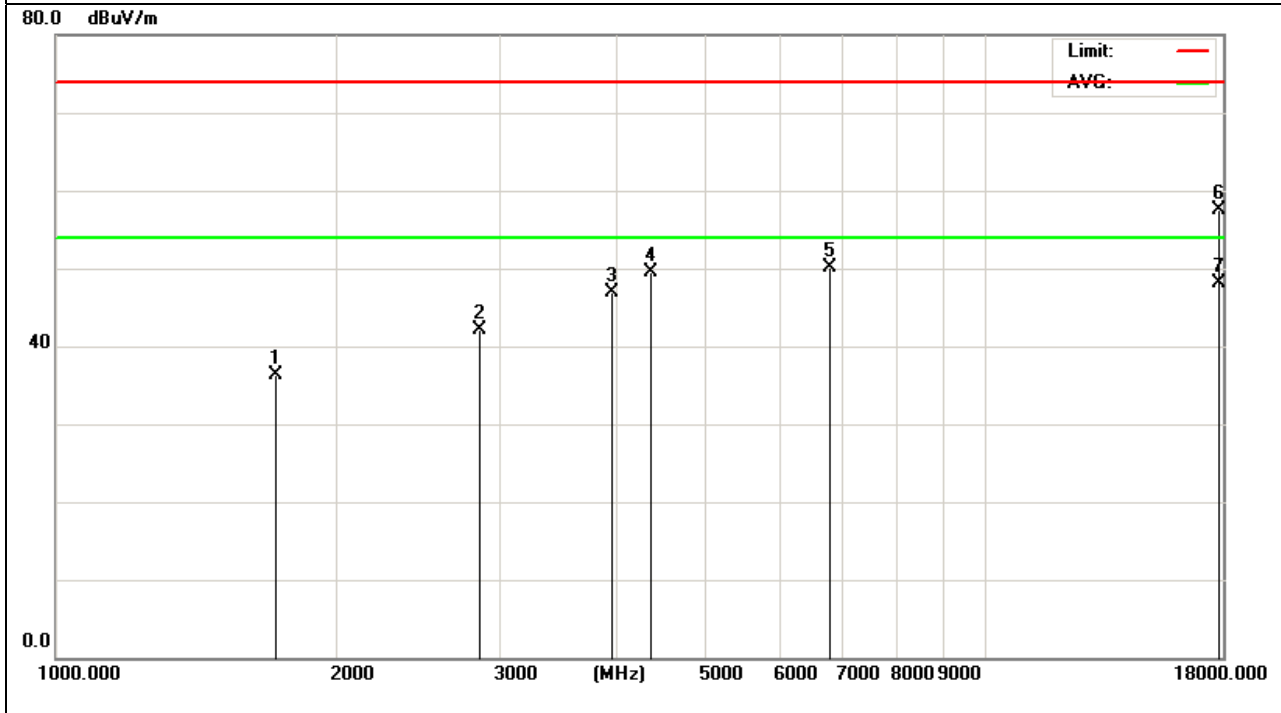

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 64	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1879.100	46.32	-9.49	36.83	74.00	-37.17	peak
3014.998	43.32	-1.65	41.67	74.00	-32.33	peak
4354.948	44.51	4.45	48.96	74.00	-25.04	peak
4885.789	45.96	5.14	51.10	74.00	-22.90	peak
8023.978	42.32	10.41	52.73	74.00	-21.27	peak
17555.646	32.84	25.00	57.84	74.00	-16.16	peak
17555.646	23.26	25.00	48.26	54.00	-5.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

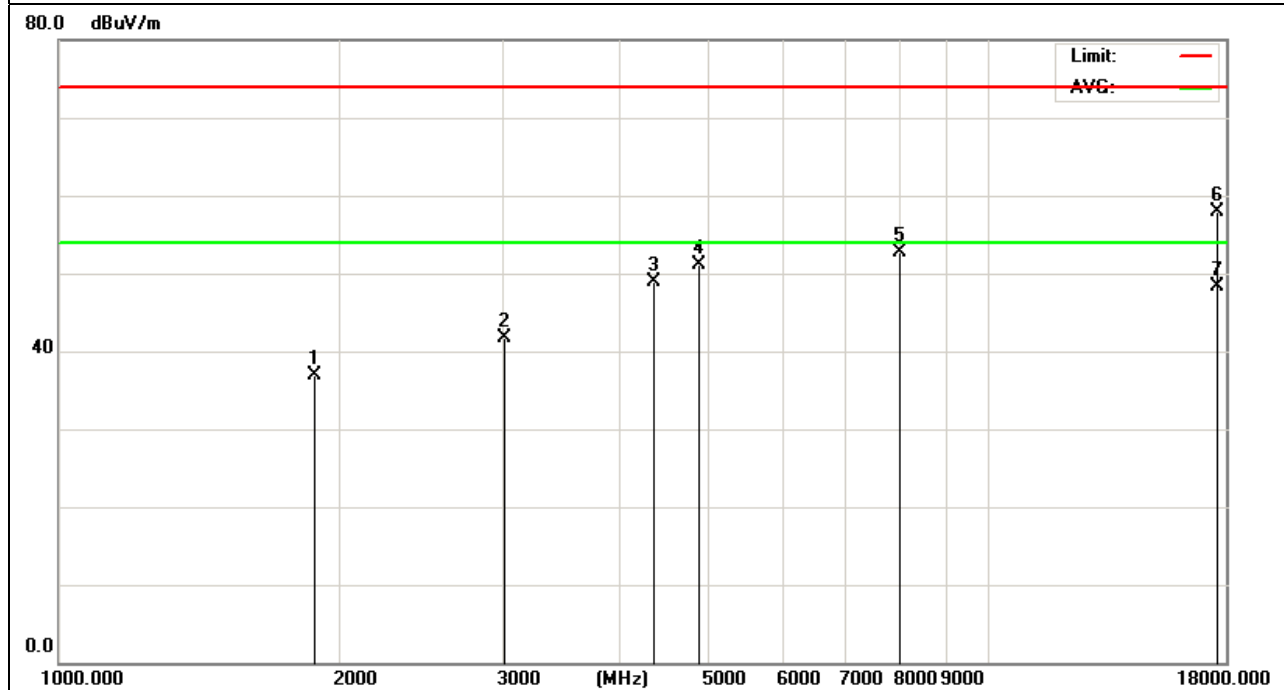

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 64	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19356.000	41.02	14.31	55.33	74.00	-18.67	peak
19356.000	31.42	14.31	45.73	54.00	-8.27	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 64	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18646.000	42.55	13.26	55.81	74.00	-18.19	peak
18646.000	32.88	13.26	46.14	54.00	-7.86	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

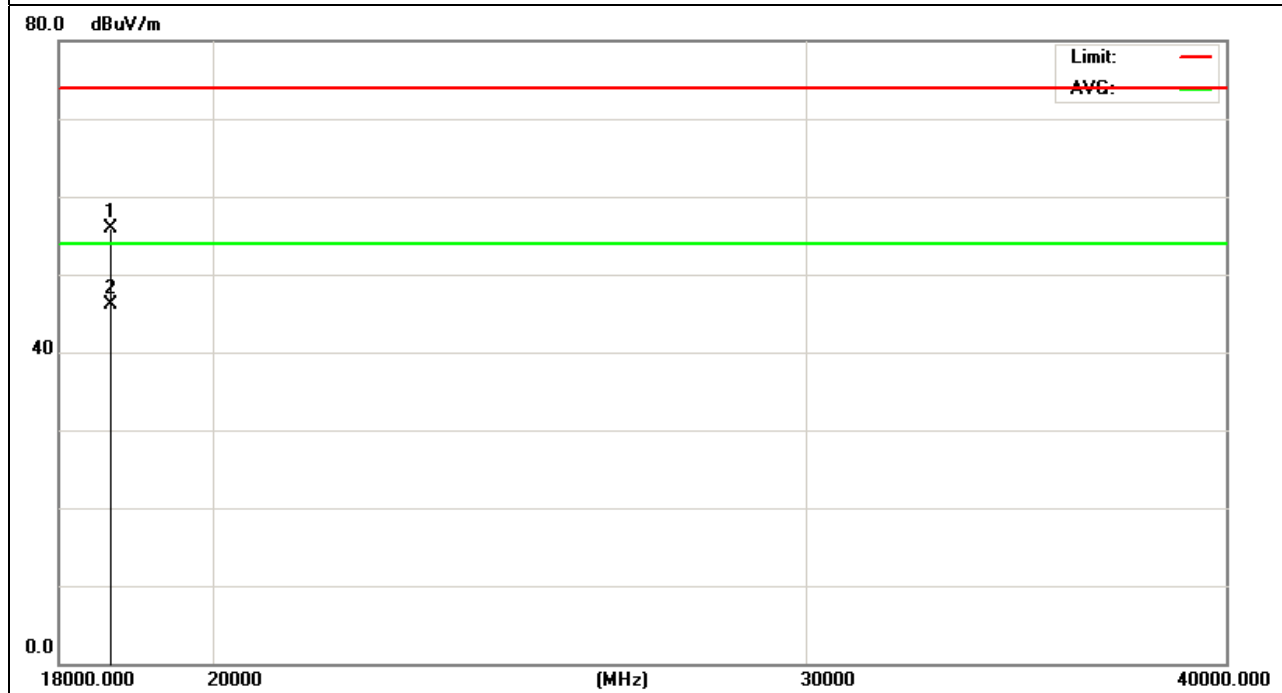

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 52	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1776.884	45.87	-9.40	36.47	74.00	-37.53	peak
2850.793	44.39	-2.61	41.78	74.00	-32.22	peak
3955.481	42.74	3.51	46.25	74.00	-27.75	peak
4367.251	46.00	4.46	50.46	74.00	-23.54	peak
6779.332	44.84	6.03	50.87	74.00	-23.13	peak
17759.333	33.32	24.85	58.17	74.00	-15.83	peak
17759.333	23.01	24.85	47.86	54.00	-6.14	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

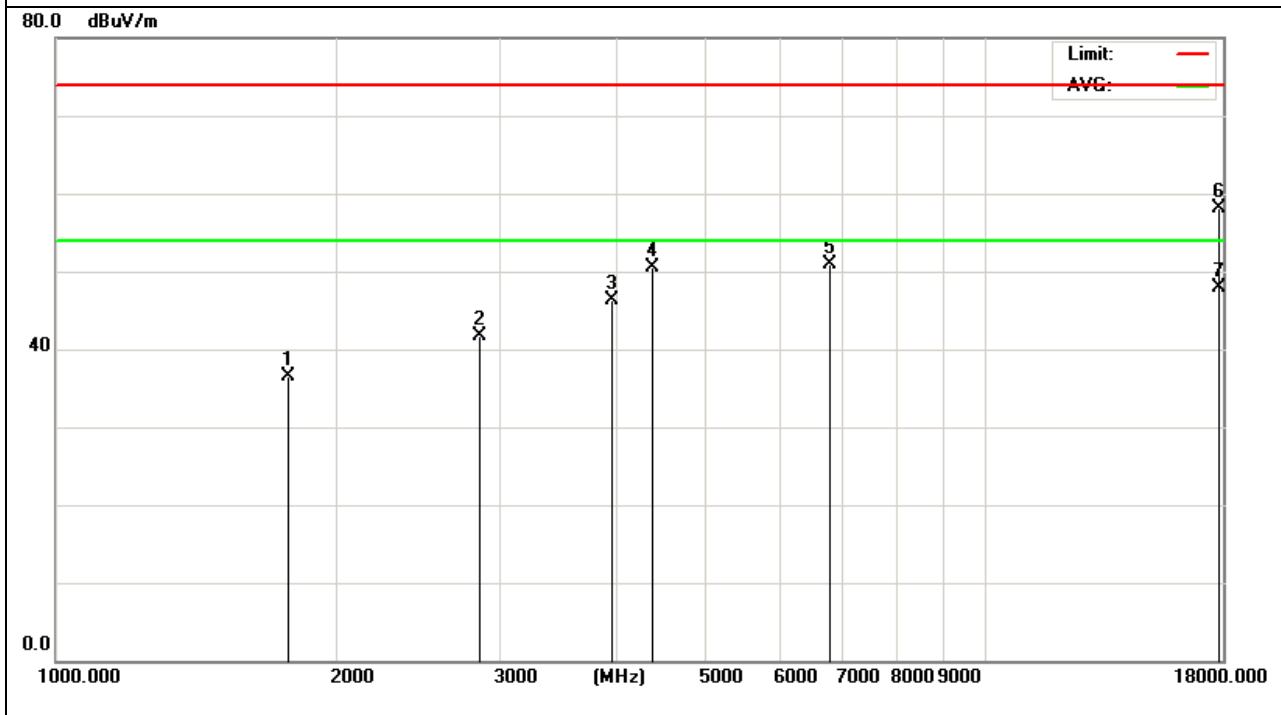

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 52	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1865.000	46.32	-9.46	36.86	74.00	-37.14	peak
3020.480	43.12	-1.63	41.49	74.00	-32.51	peak
4325.994	44.67	4.39	49.06	74.00	-24.94	peak
6849.781	43.46	6.08	49.54	74.00	-24.46	peak
8023.948	39.89	10.41	50.30	74.00	-23.70	peak
17600.221	32.79	24.96	57.75	74.00	-16.25	peak
17600.221	22.84	24.96	47.80	54.00	-6.20	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

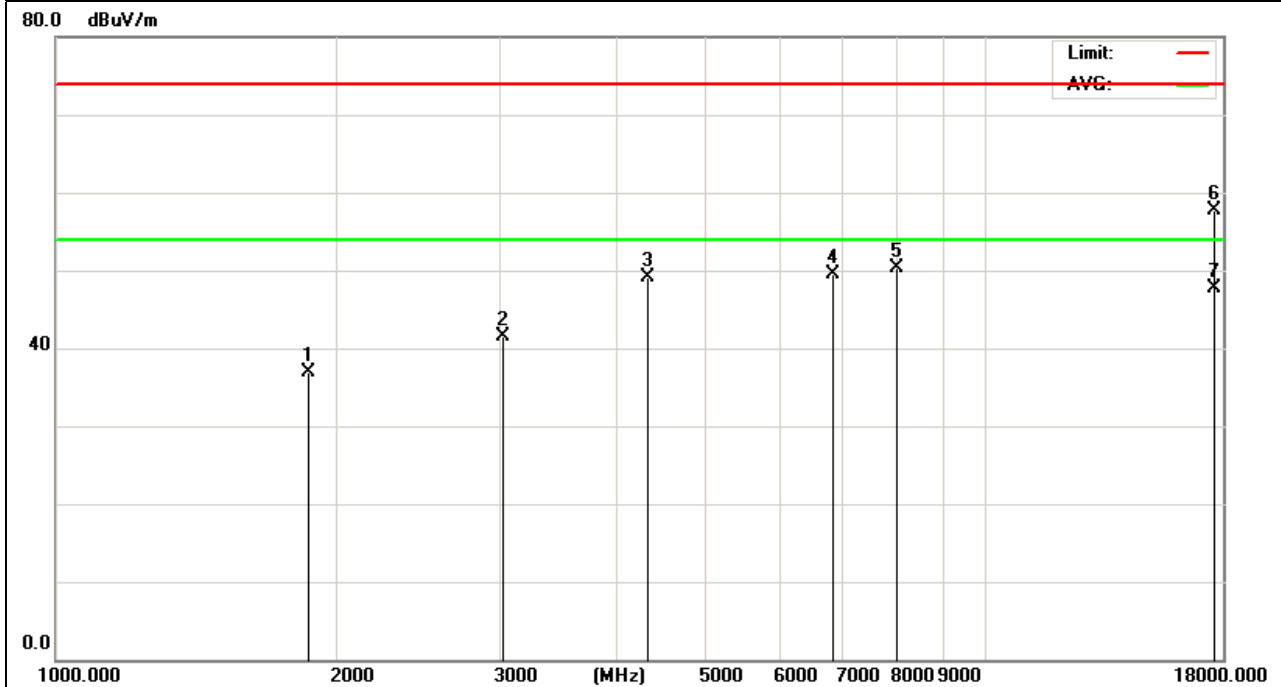

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 52	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18994.000	40.77	13.77	54.54	74.00	-19.46	peak
18994.000	31.03	13.77	44.80	54.00	-9.20	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

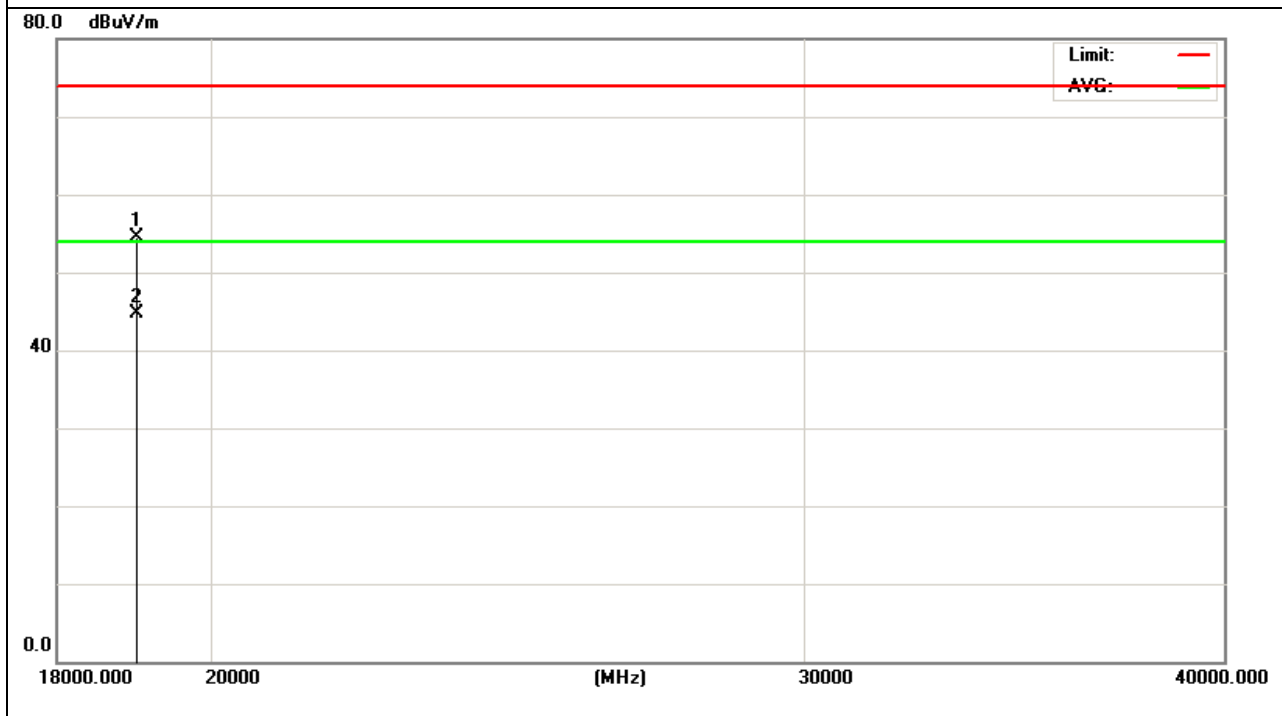

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 52	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19562.000	40.39	14.62	55.01	74.00	-18.99	peak
19562.000	31.21	14.62	45.83	54.00	-8.17	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

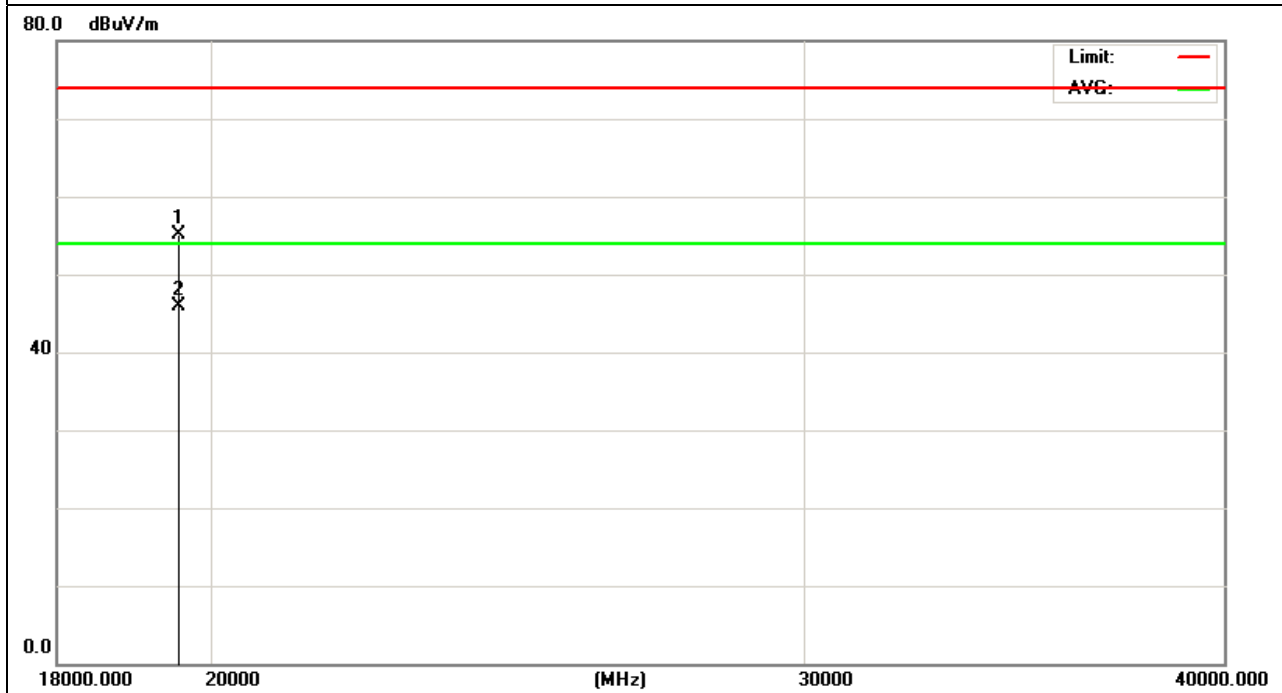

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 56	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1762.324	45.89	-9.45	36.44	74.00	-37.56	peak
2863.441	43.69	-2.55	41.14	74.00	-32.86	peak
3995.325	42.74	3.80	46.54	74.00	-27.46	peak
4384.169	43.95	4.50	48.45	74.00	-25.55	peak
6756.178	44.41	6.02	50.43	74.00	-23.57	peak
17654.840	31.84	24.92	56.76	74.00	-17.24	peak
17654.840	23.01	24.92	47.93	54.00	-6.07	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

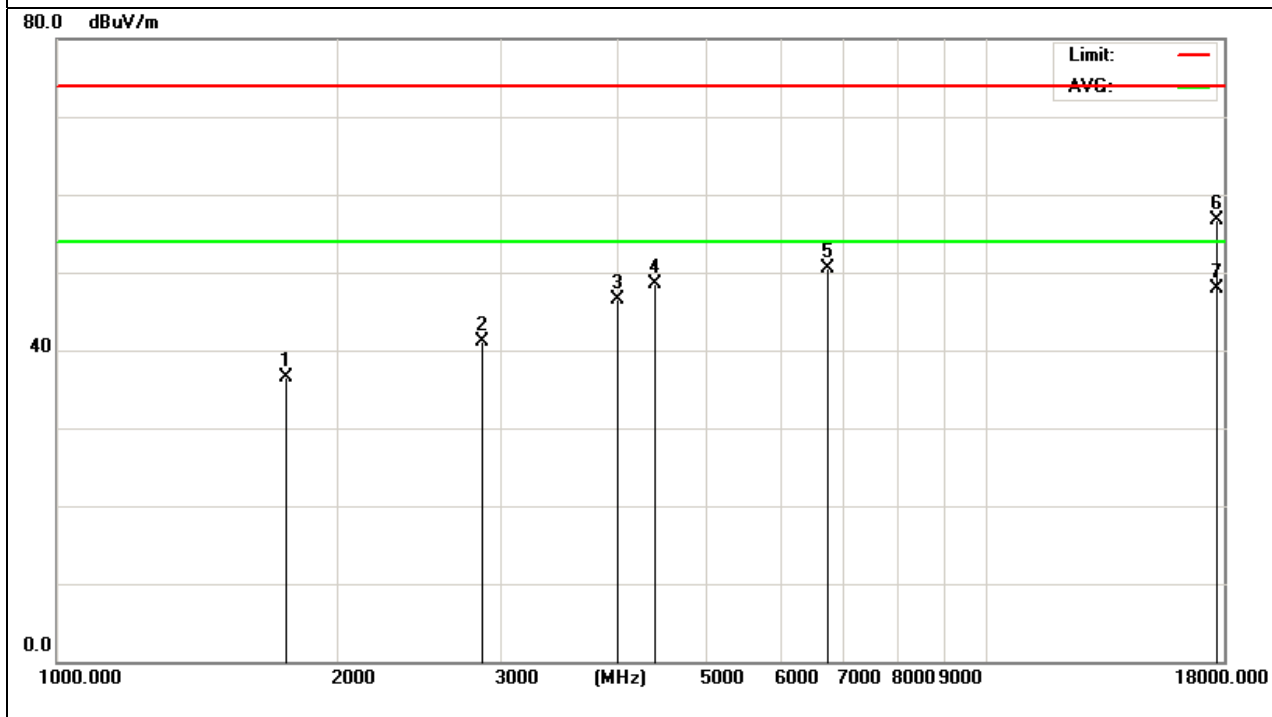

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 56	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1876.394	45.95	-9.48	36.47	74.00	-37.53	peak
3013.774	43.21	-1.65	41.56	74.00	-32.44	peak
4356.950	44.25	4.45	48.70	74.00	-25.30	peak
4855.227	43.88	5.11	48.99	74.00	-25.01	peak
8020.314	41.65	10.41	52.06	74.00	-21.94	peak
17890.214	33.98	24.75	58.73	74.00	-15.27	peak
17890.214	23.24	24.75	47.99	54.00	-6.01	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

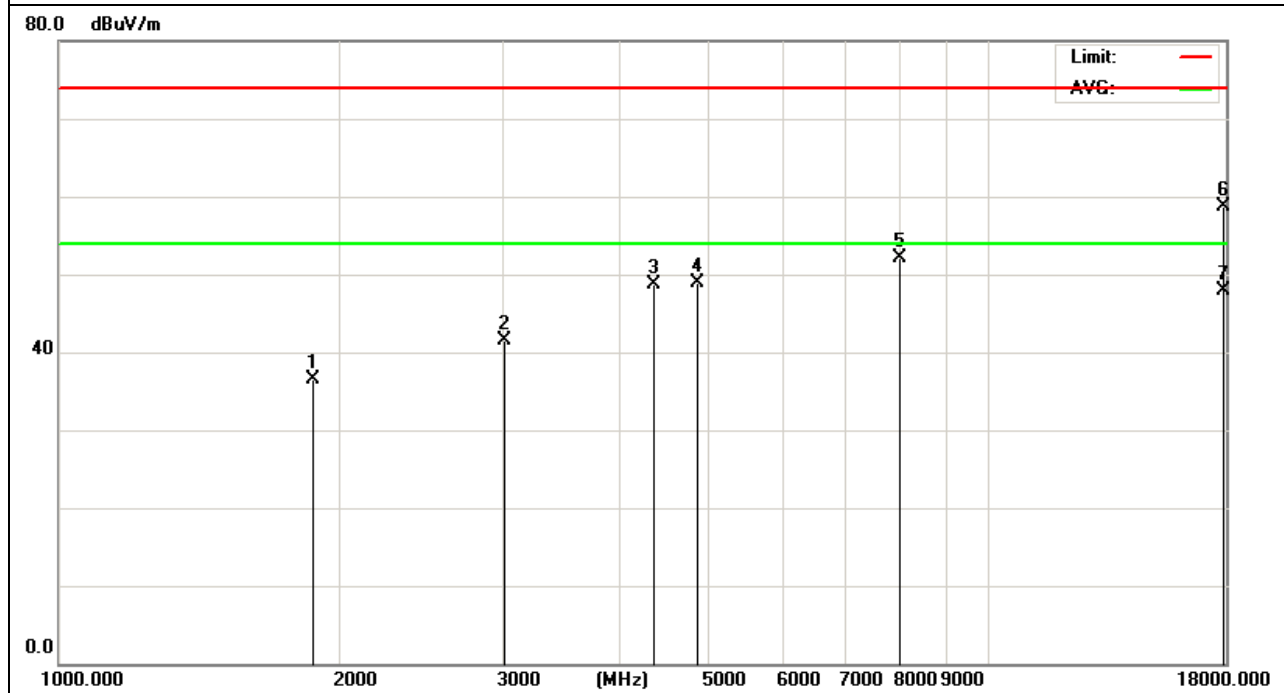

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 56	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19328.000	41.68	14.27	55.95	74.00	-18.05	peak
19328.000	31.24	14.27	45.51	54.00	-8.49	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

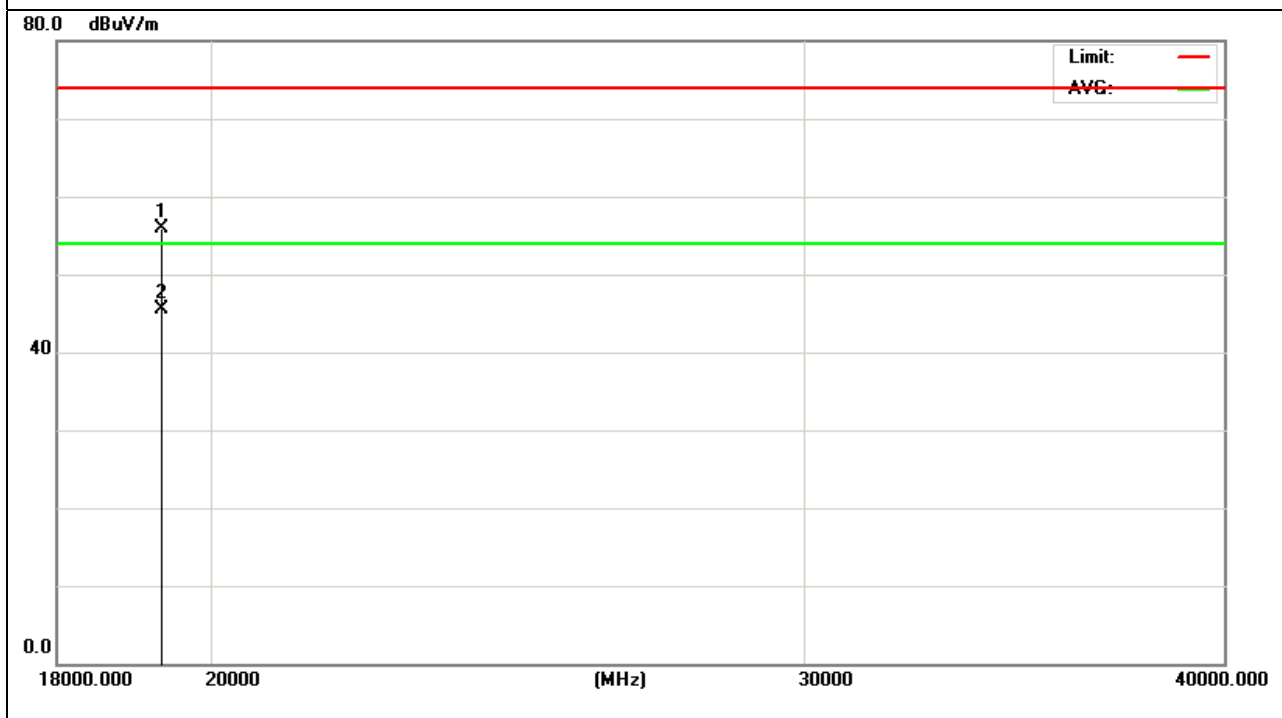

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 56	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18669.000	41.96	13.29	55.25	74.00	-18.75	peak
18669.000	31.87	13.29	45.16	54.00	-8.84	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

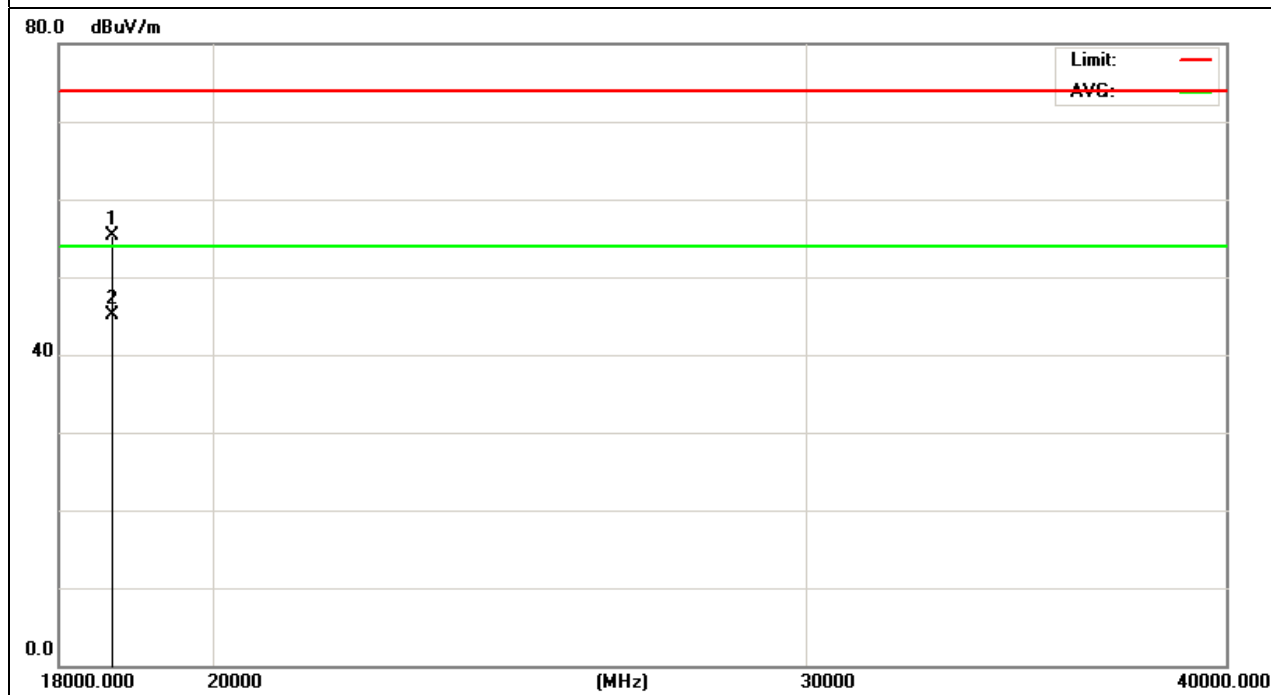

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 64	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1683.480	45.68	-9.68	36.00	74.00	-38.00	peak
2847.668	44.52	-2.62	41.90	74.00	-32.10	peak
3964.814	43.21	3.59	46.80	74.00	-27.20	peak
4366.202	42.62	4.46	47.08	74.00	-26.92	peak
6795.392	43.95	6.04	49.99	74.00	-24.01	peak
17656.224	33.41	24.92	58.33	74.00	-15.67	peak
17656.224	23.03	24.92	47.95	54.00	-6.05	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

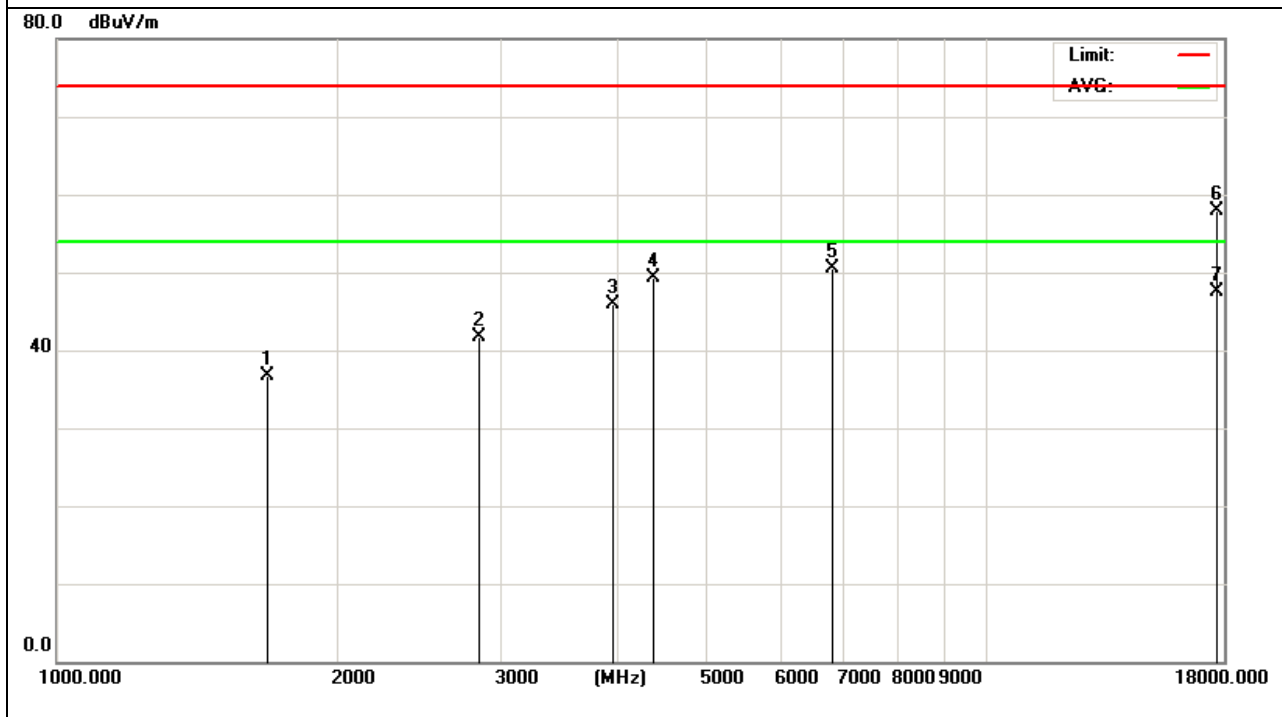

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 64	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1644.251	45.69	-9.79	35.90	74.00	-38.10	peak
3010.841	43.31	-1.65	41.66	74.00	-32.34	peak
4364.647	44.25	4.46	48.71	74.00	-25.29	peak
4870.312	43.48	5.13	48.61	74.00	-25.39	peak
8065.394	42.31	10.46	52.77	74.00	-21.23	peak
17650.289	32.64	24.93	57.57	74.00	-16.43	peak
17650.289	22.54	24.93	47.47	54.00	-6.53	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

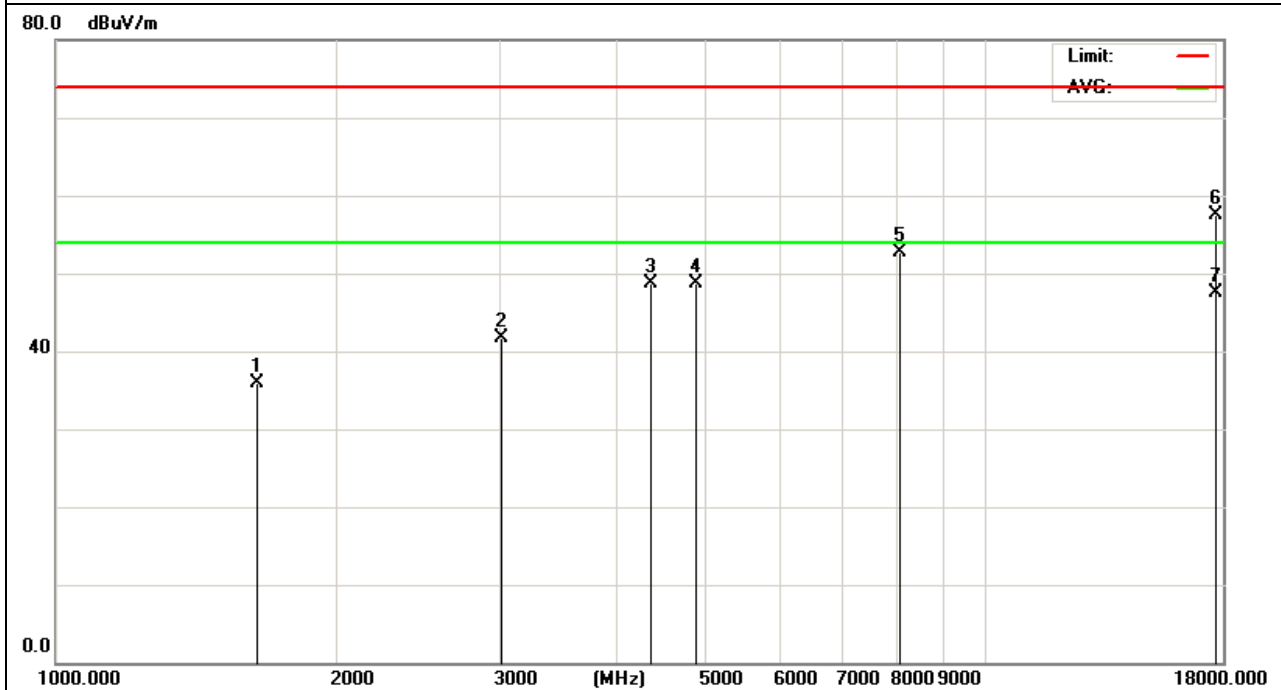

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 64	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
18546.000	43.01	13.11	56.12	74.00	-17.88	peak
18546.000	32.31	13.11	45.42	54.00	-8.58	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

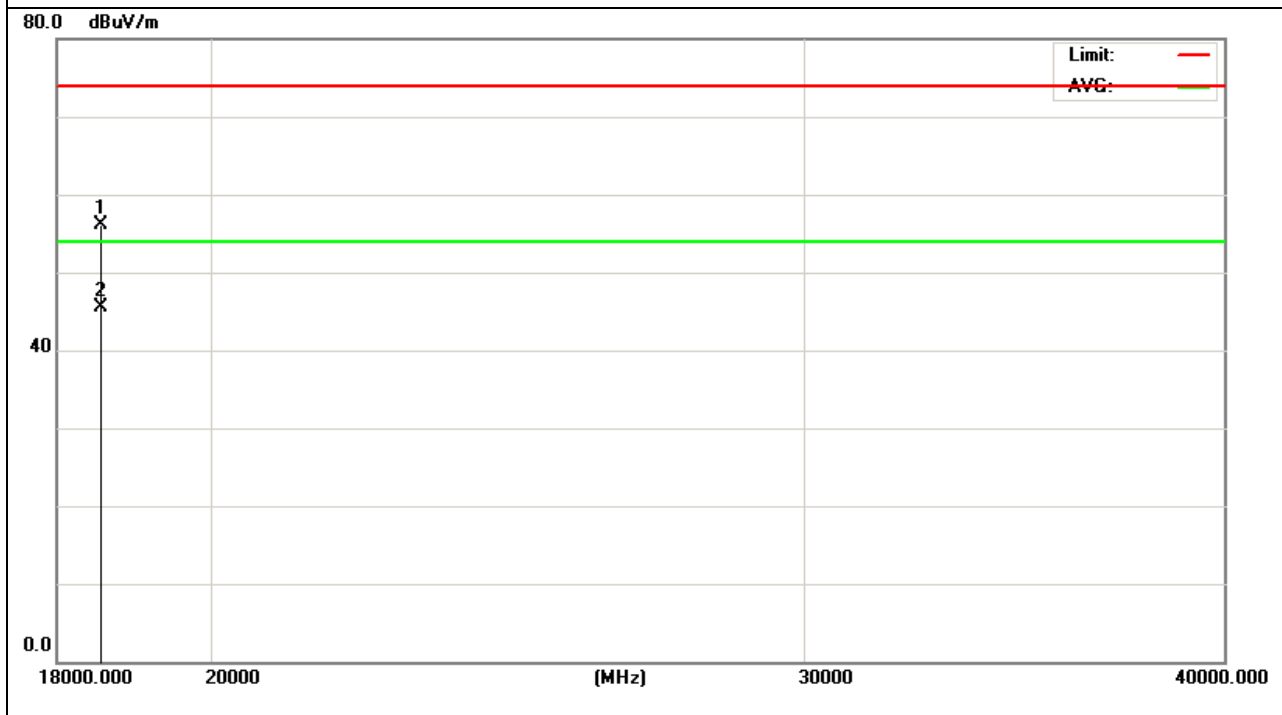

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 64	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19562.000	40.84	14.62	55.46	74.00	-18.54	peak
19562.000	30.78	14.62	45.40	54.00	-8.60	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

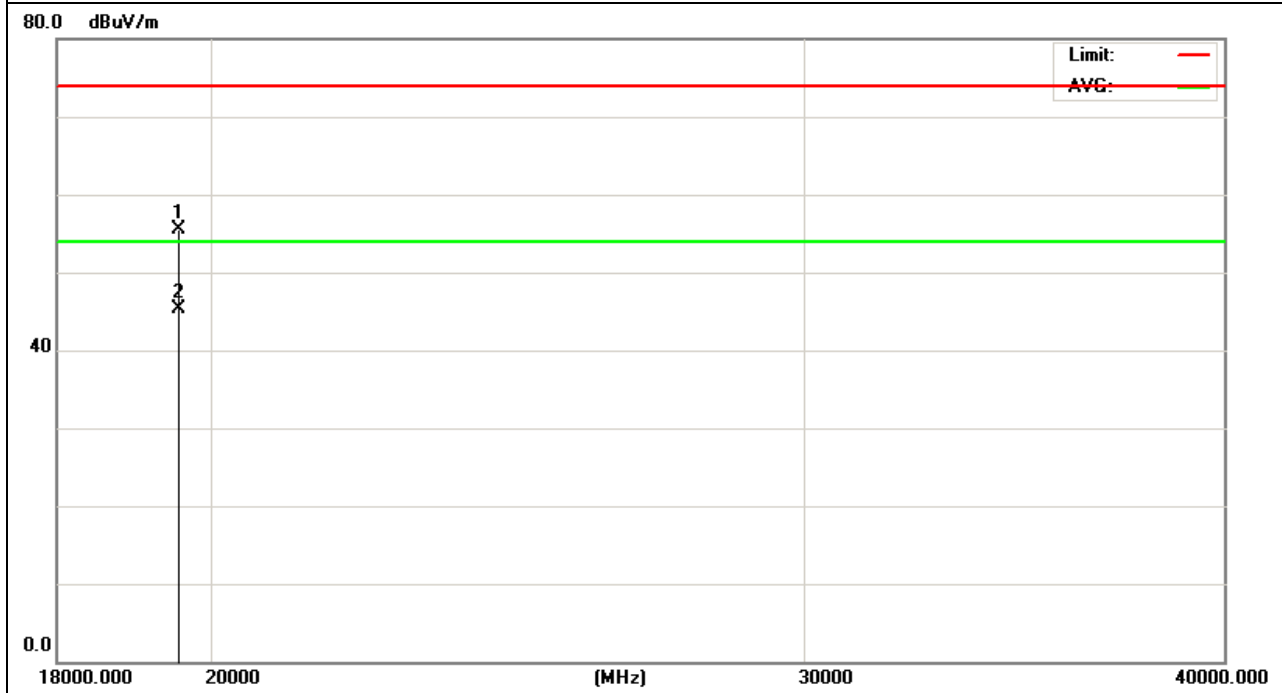

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 54	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1800.329	45.88	-9.34	36.54	74.00	-37.46	peak
2840.221	44.61	-2.66	41.95	74.00	-32.05	peak
3954.309	43.23	3.50	46.73	74.00	-27.27	peak
4364.789	45.21	4.46	49.67	74.00	-24.33	peak
6787.952	44.57	6.04	50.61	74.00	-23.39	peak
17695.302	32.60	24.90	57.50	74.00	-16.50	peak
17695.302	22.84	24.90	47.74	54.00	-6.26	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

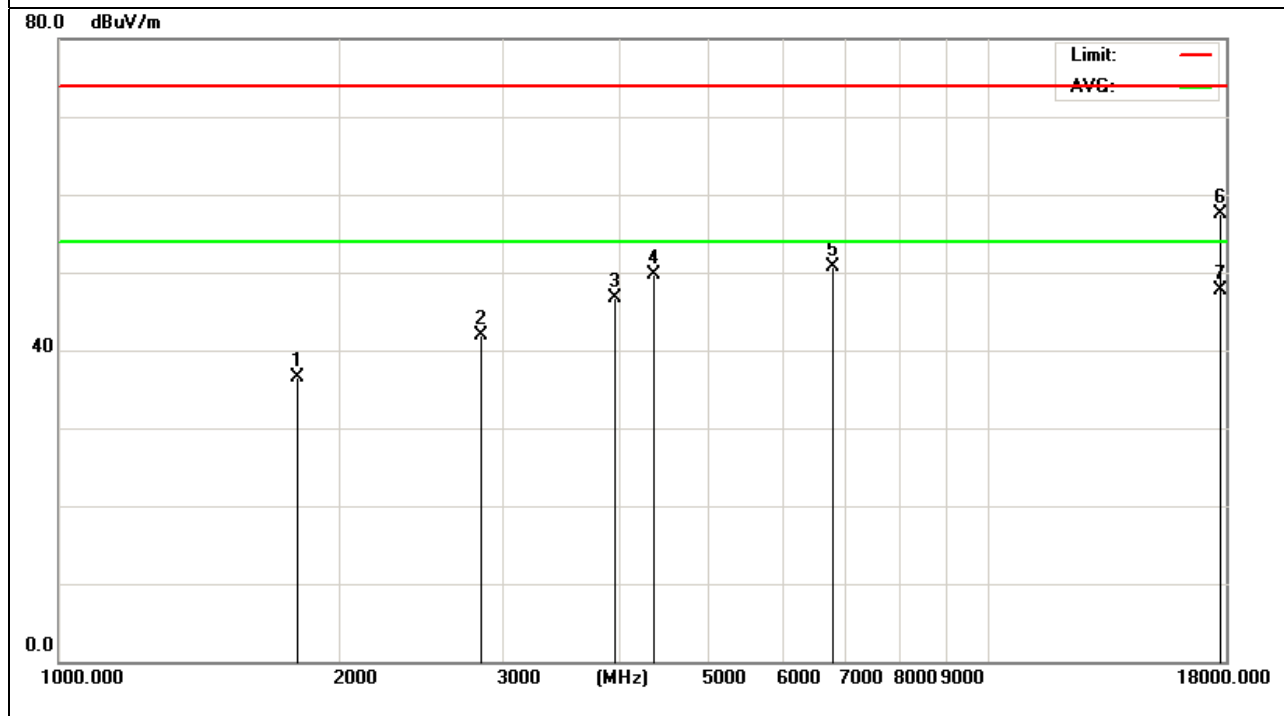

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 54	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1684.278	45.97	-9.68	36.29	74.00	-37.71	peak
3015.994	43.21	-1.64	41.57	74.00	-32.43	peak
4357.394	43.69	4.45	48.14	74.00	-25.86	peak
6845.772	44.44	6.08	50.52	74.00	-23.48	peak
8000.329	42.31	10.38	52.69	74.00	-21.31	peak
17668.169	33.56	24.91	58.47	74.00	-15.53	peak
17668.169	22.89	24.91	47.80	54.00	-6.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

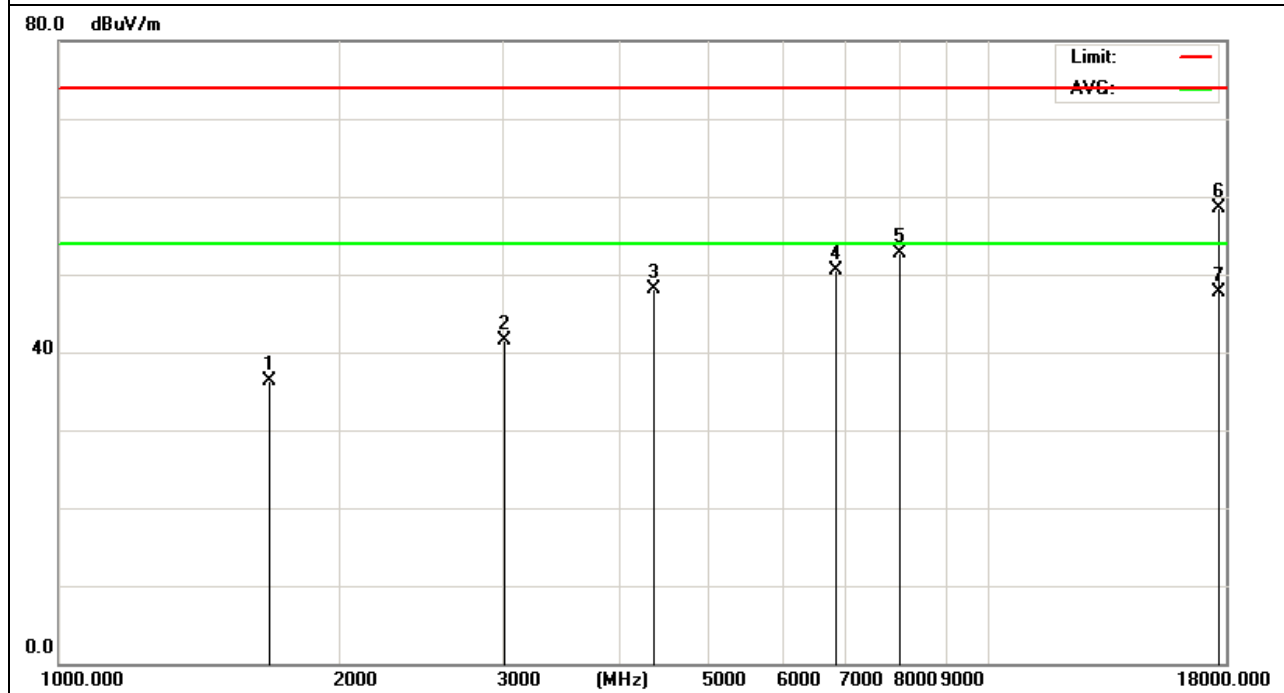

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 54	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19599.000	42.32	14.68	57.00	74.00	-17.00	peak
19599.000	31.02	14.68	45.70	54.00	-8.30	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 54	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20118.000	40.22	15.44	55.66	74.00	-18.34	peak
20118.000	29.69	15.44	45.13	54.00	-8.87	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

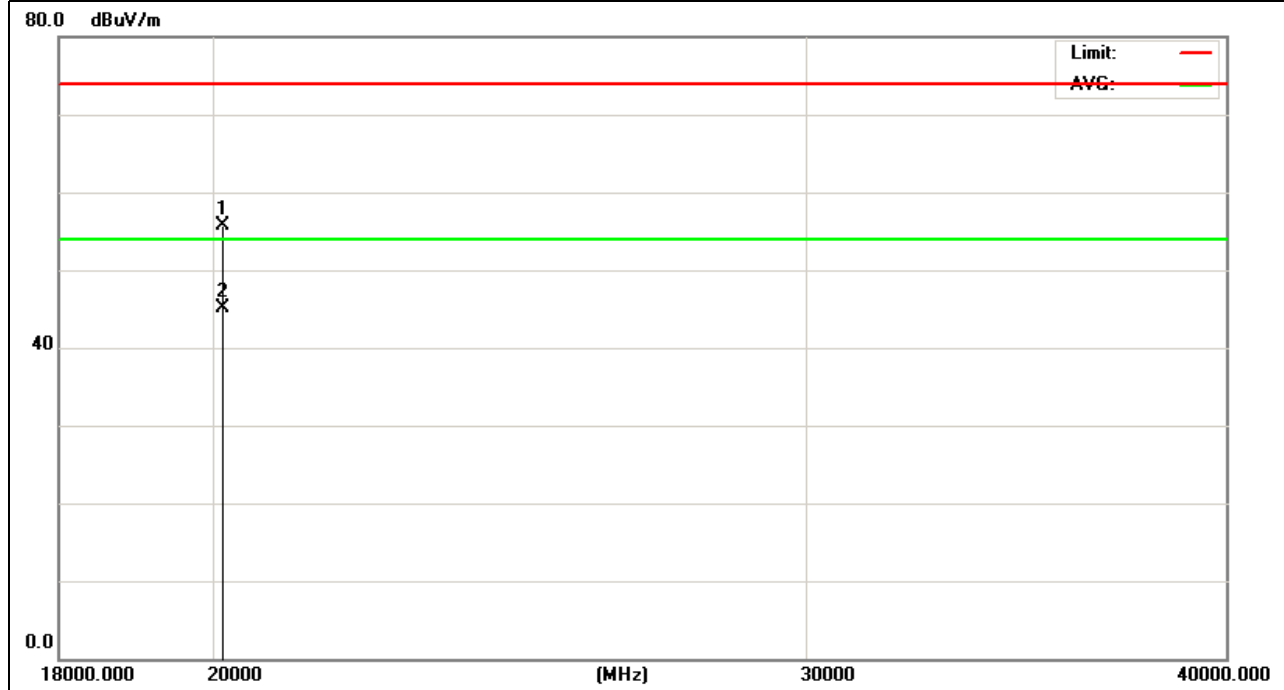

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 62	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1882.582	46.12	-9.50	36.62	74.00	-37.38	peak
2843.691	43.33	-2.65	40.68	74.00	-33.32	peak
3950.471	43.02	3.47	46.49	74.00	-27.51	peak
4376.964	43.64	4.49	48.13	74.00	-25.87	peak
6779.149	43.85	6.03	49.88	74.00	-24.12	peak
17703.784	33.21	24.89	58.10	74.00	-15.90	peak
17703.784	23.31	24.89	48.20	54.00	-5.80	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

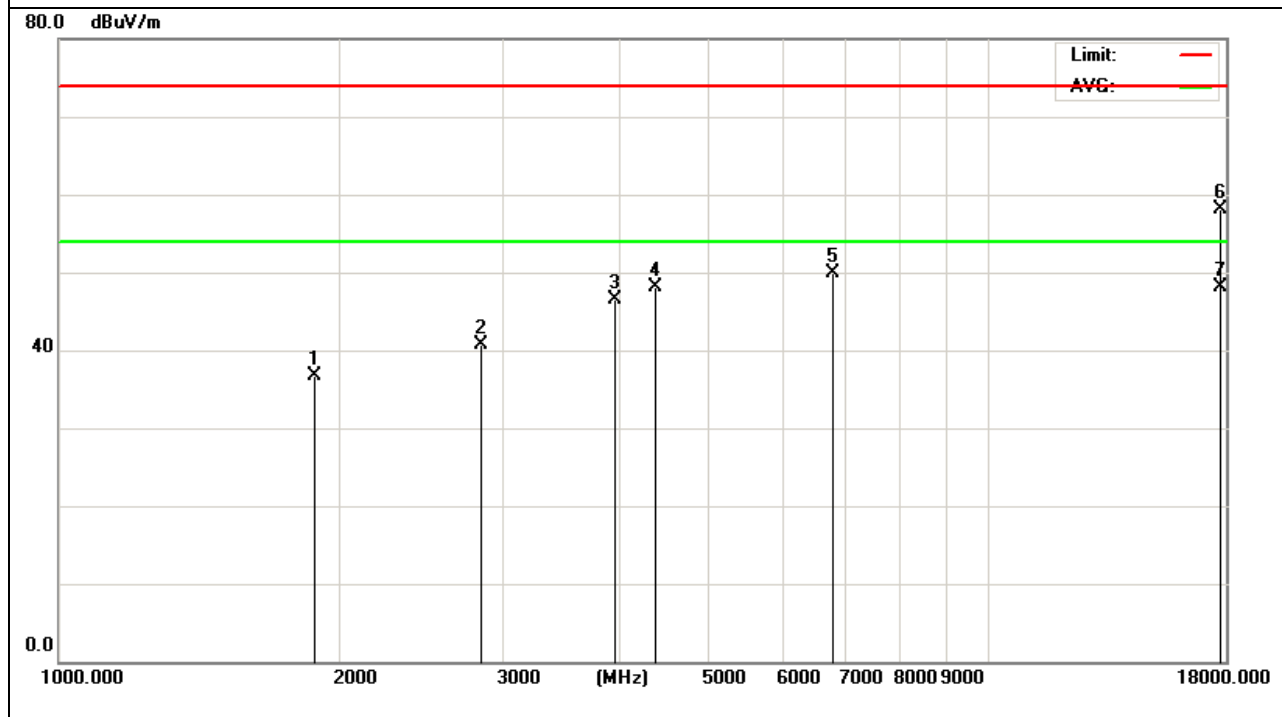

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 62	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1856.994	45.89	-9.44	36.45	74.00	-37.55	peak
3013.478	43.48	-1.65	41.83	74.00	-32.17	peak
4351.699	44.25	4.43	48.68	74.00	-25.32	peak
4855.332	43.36	5.11	48.47	74.00	-25.53	peak
8021.147	41.23	10.41	51.64	74.00	-22.36	peak
17796.478	33.88	24.82	58.70	74.00	-15.30	peak
17796.478	22.36	24.82	47.18	54.00	-6.82	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

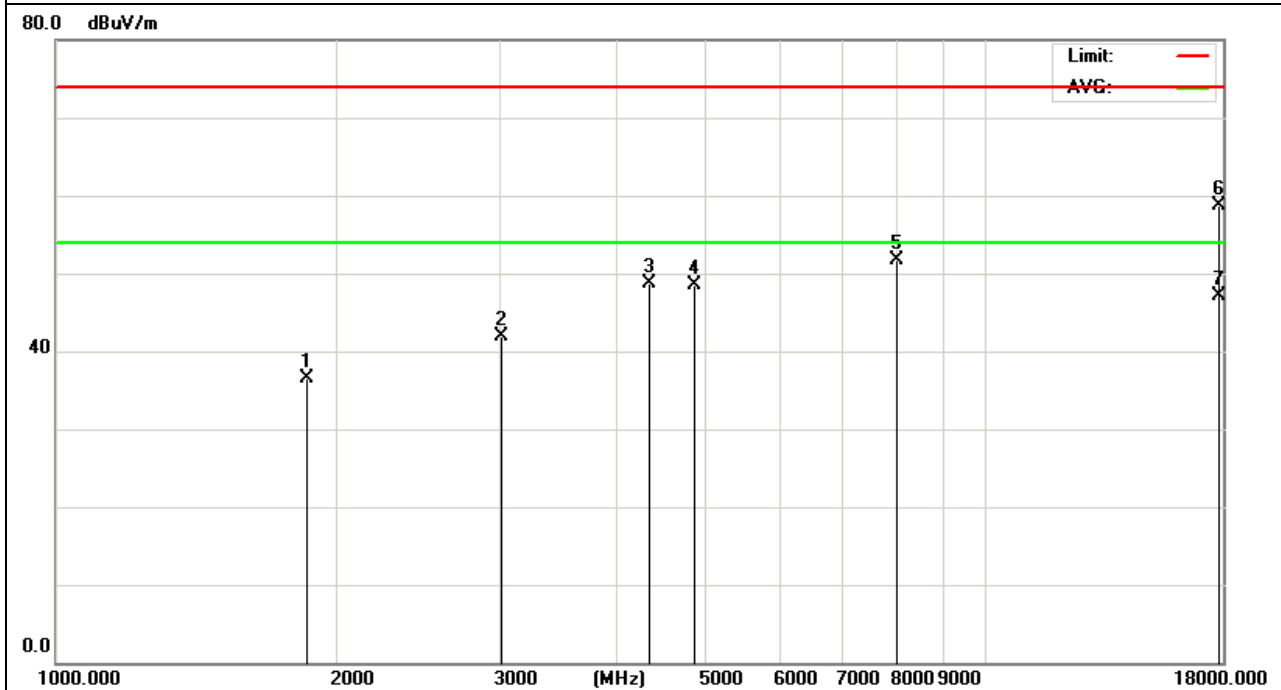

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 62	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
19981.000	40.12	15.23	55.35	74.00	-18.65	peak
19981.000	30.15	15.23	45.38	54.00	-8.62	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

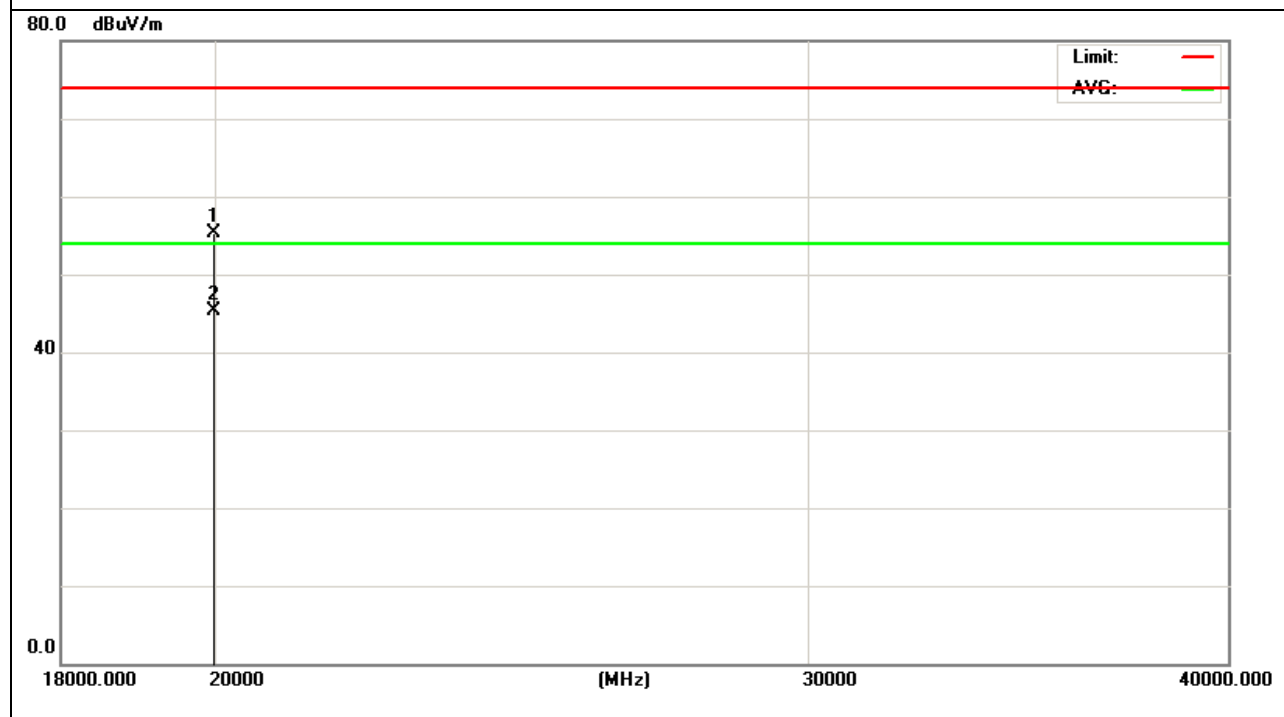

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 62	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
18884.000	40.33	13.61	53.94	74.00	-20.06	peak
18884.000	31.02	13.61	44.63	54.00	-9.37	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

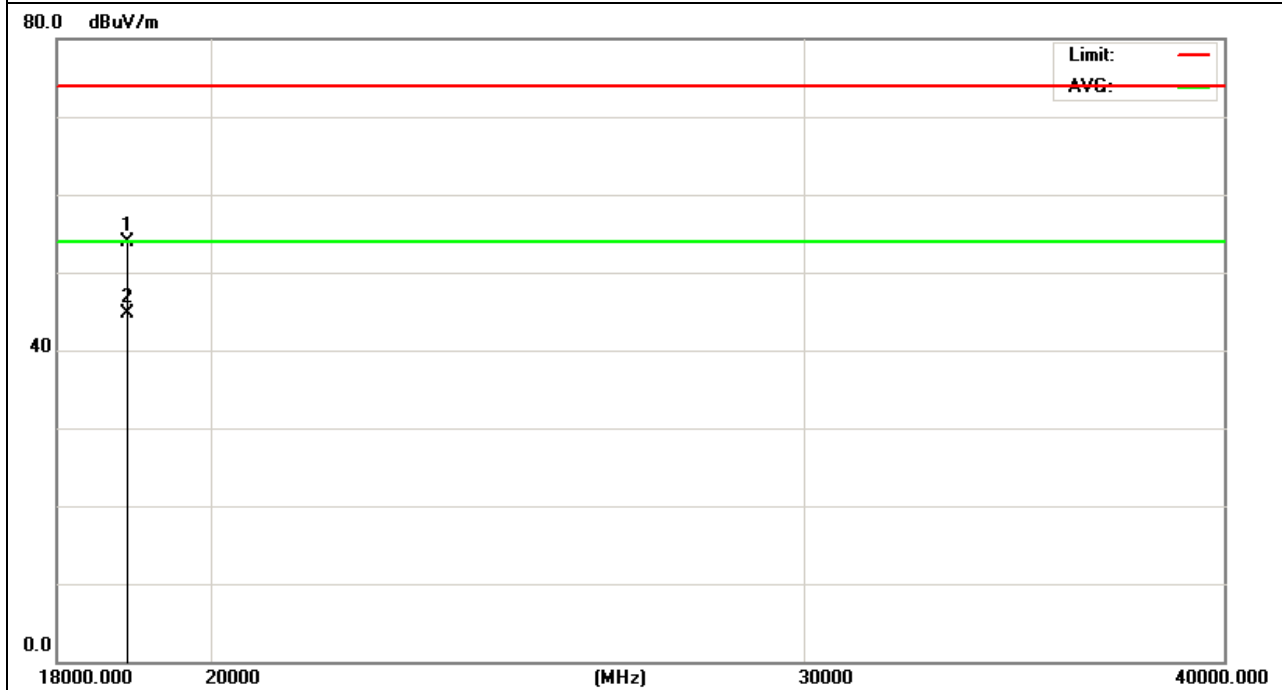

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 58	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1702.156	46.01	-9.63	36.38	74.00	-37.62	peak
2843.694	43.36	-2.65	40.71	74.00	-33.29	peak
3949.487	43.21	3.47	46.68	74.00	-27.32	peak
4396.329	44.08	4.52	48.60	74.00	-25.40	peak
6788.159	44.51	6.04	50.55	74.00	-23.45	peak
17650.021	32.69	24.93	57.62	74.00	-16.38	peak
17650.021	22.84	24.93	47.77	54.00	-6.23	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

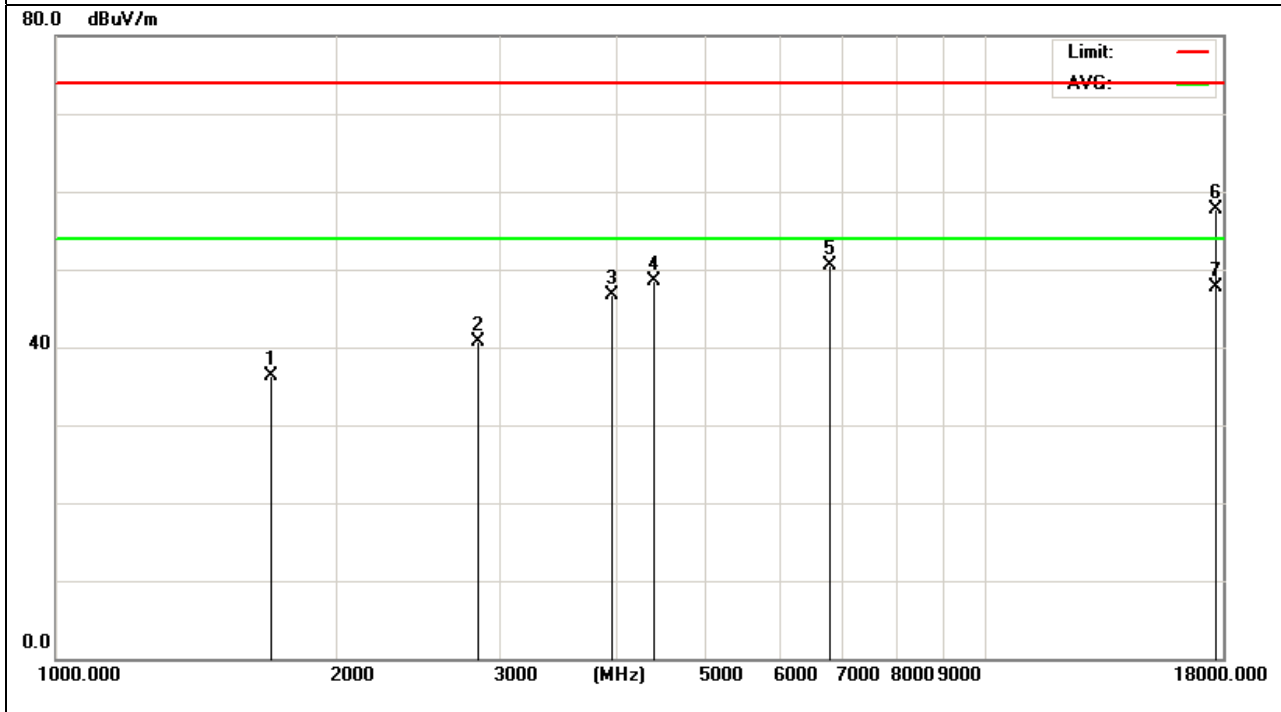

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 58	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1760.954	45.87	-9.45	36.42	74.00	-37.58	peak
3039.321	43.02	-1.59	41.43	74.00	-32.57	peak
4354.621	44.48	4.45	48.93	74.00	-25.07	peak
4840.965	43.69	5.10	48.79	74.00	-25.21	peak
8010.481	42.01	10.40	52.41	74.00	-21.59	peak
17688.249	32.58	24.90	57.48	74.00	-16.52	peak
17688.249	23.31	24.90	48.21	54.00	-5.79	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

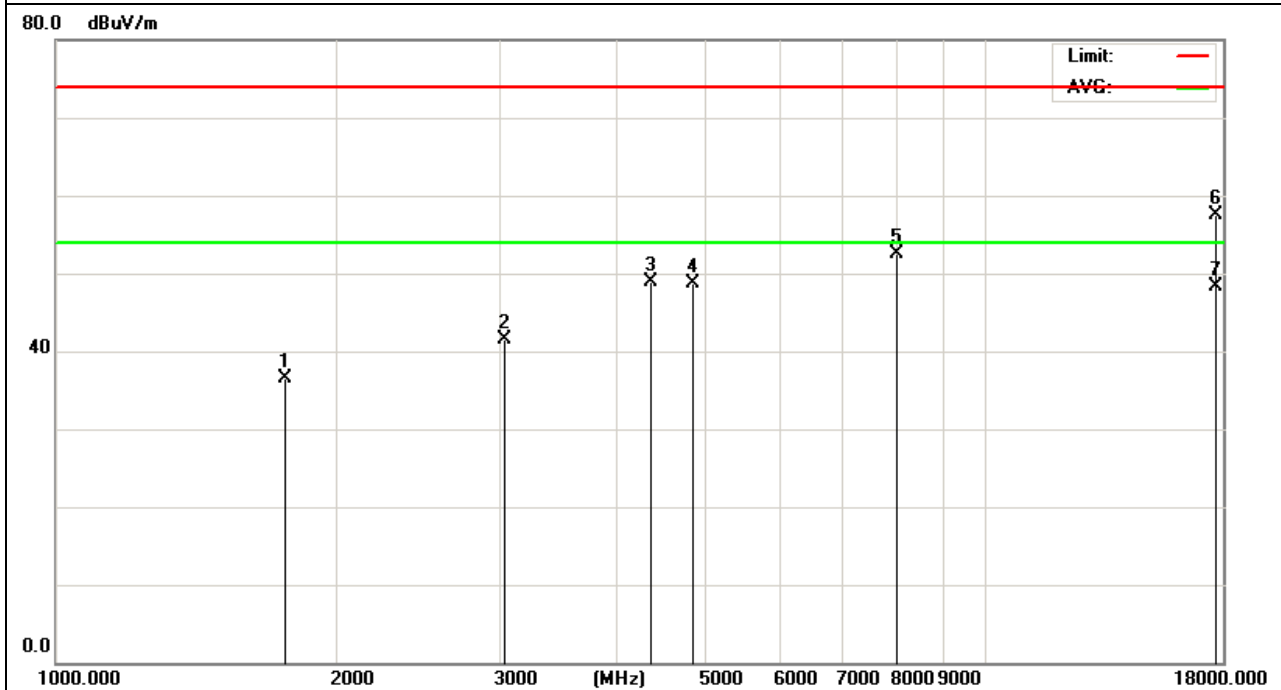

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 58	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
20156.000	39.91	15.50	55.41	74.00	-18.59	
20156.000	30.23	15.50	45.73	54.00	-8.27	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

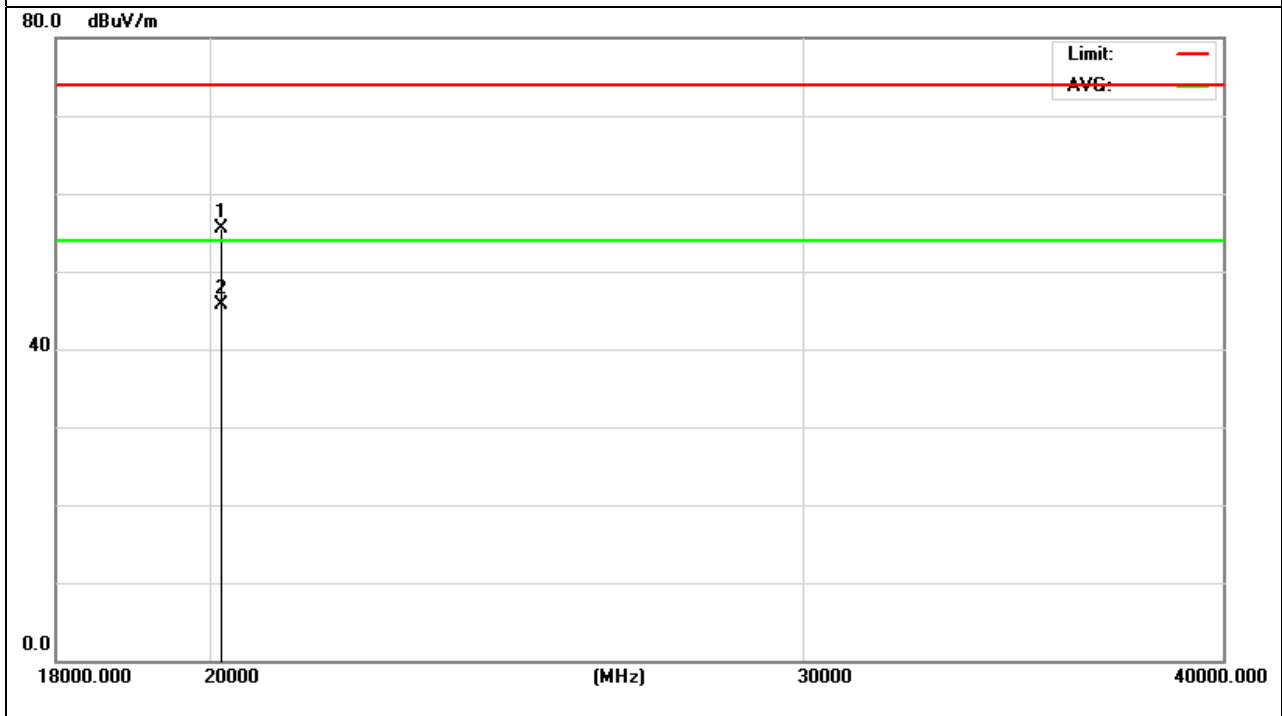

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 58	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
18964.000	43.06	13.73	56.79	74.00	-17.21	peak
18964.000	31.95	13.73	45.68	54.00	-8.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

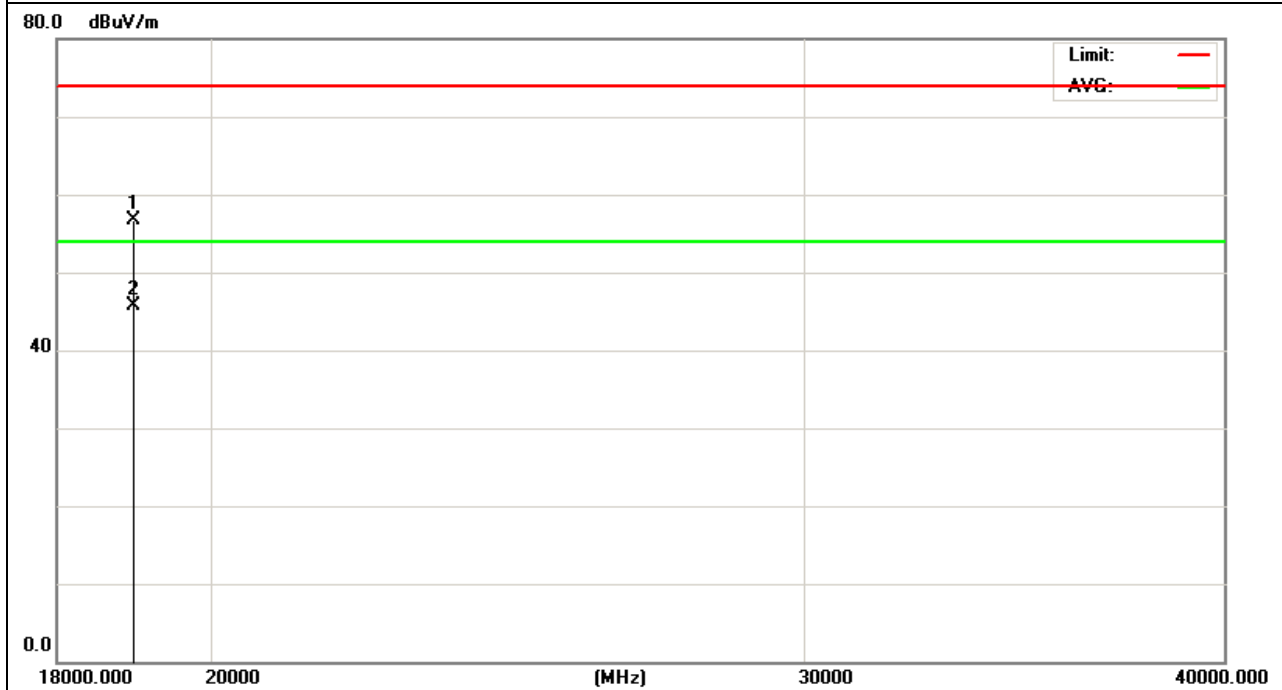


5.47MHz~5.725MHz:

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 100	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1479.662	46.10	-9.95	36.15	74.00	-37.85	peak
2843.554	43.57	-2.65	40.92	74.00	-33.08	peak
3895.790	43.39	3.08	46.47	74.00	-27.53	peak
4357.364	44.76	4.45	49.21	74.00	-24.79	peak
6734.321	43.58	6.01	49.59	74.00	-24.41	peak
17459.948	32.29	24.99	57.28	74.00	-16.72	peak
17459.948	23.01	24.99	48.00	54.00	-6.00	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

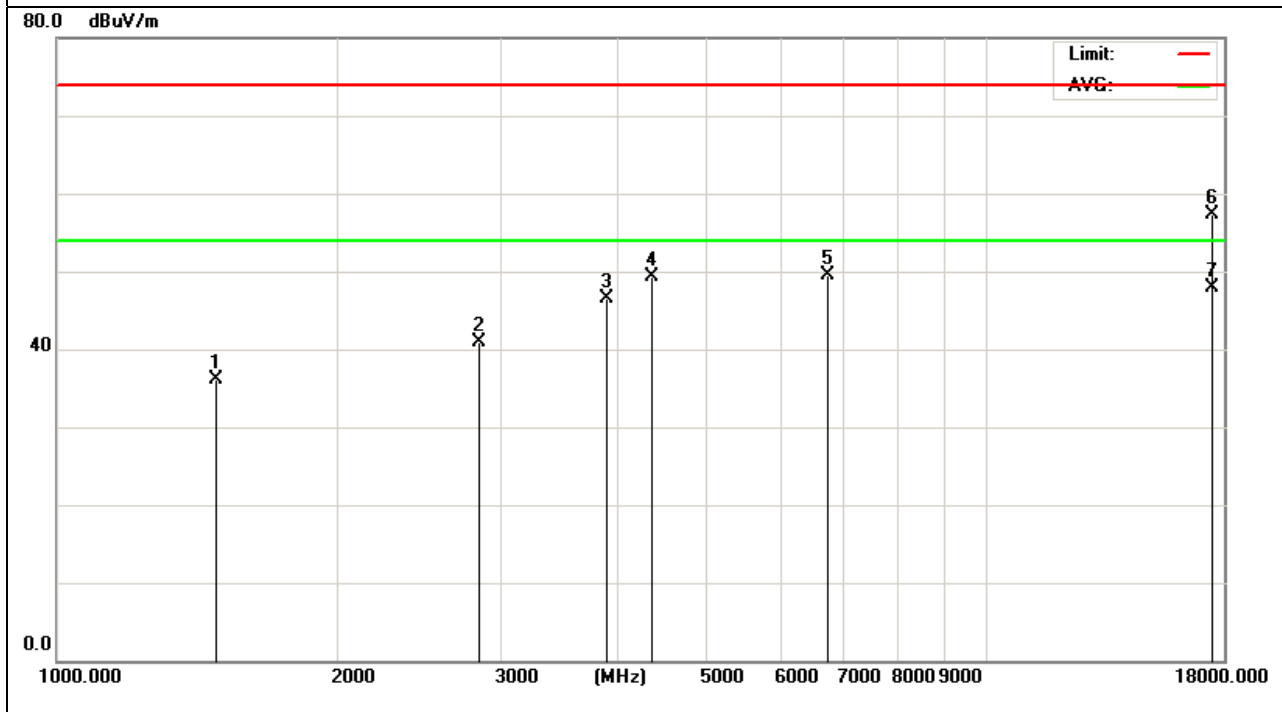

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 100	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1556.662	46.37	-9.87	36.50	74.00	-37.50	peak
3046.742	43.22	-1.57	41.65	74.00	-32.35	peak
4355.645	44.06	4.45	48.51	74.00	-25.49	peak
6840.221	43.68	6.08	49.76	74.00	-24.24	peak
8012.364	42.31	10.40	52.71	74.00	-21.29	peak
17694.321	33.55	24.89	58.44	74.00	-15.56	peak
17694.321	23.32	24.89	48.21	54.00	-5.79	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

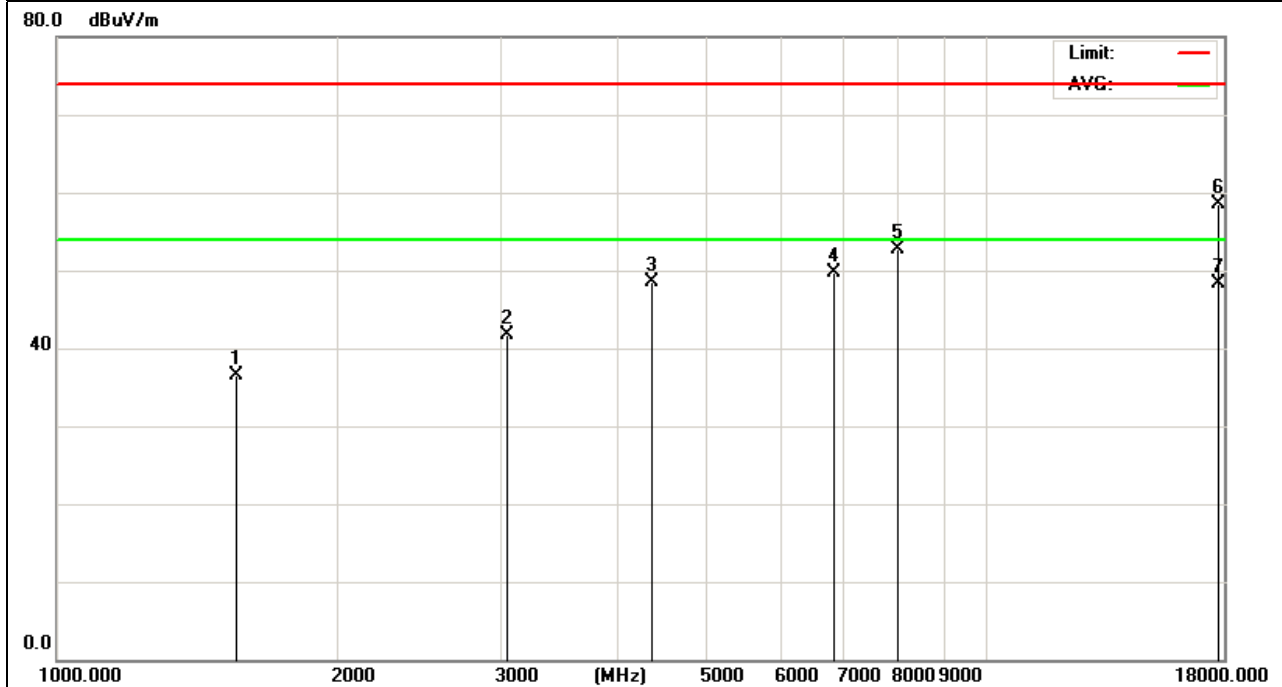

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 100	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19560.000	41.38	14.62	56.00	74.00	-18.00	peak
19560.000	31.82	14.62	46.44	54.00	-7.56	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

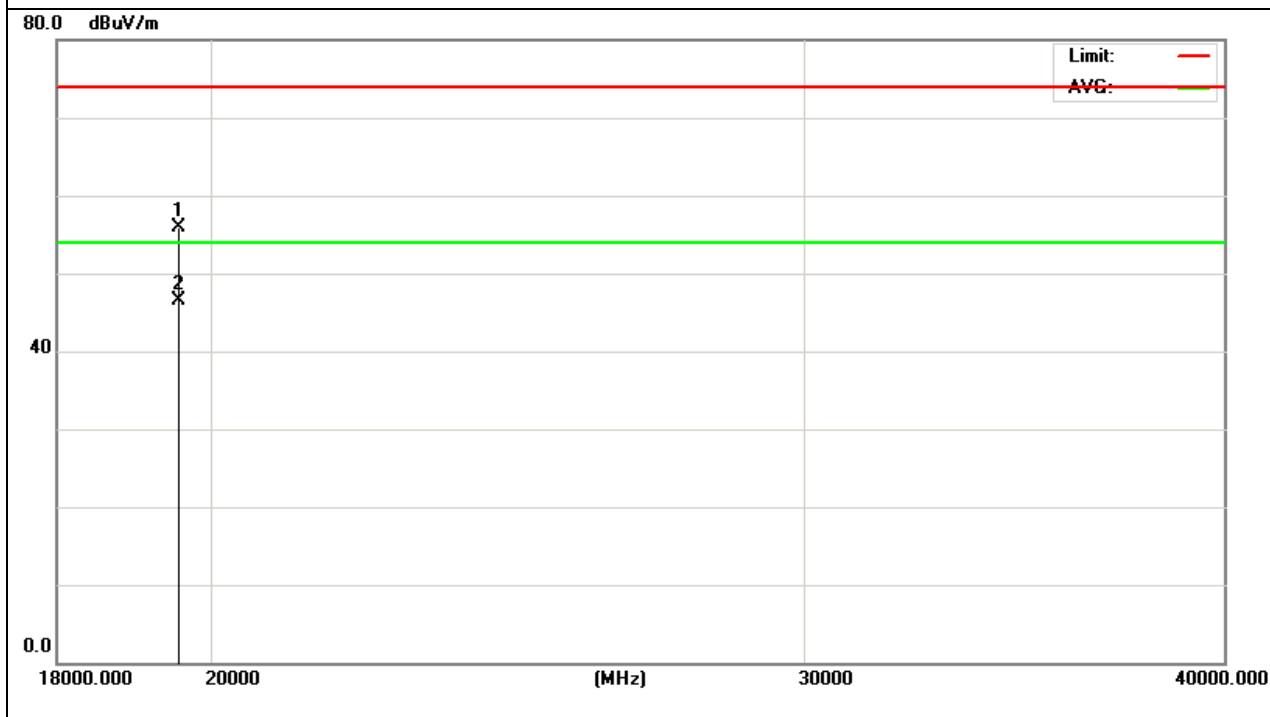

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 100	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18740.000	41.32	13.40	54.72	74.00	-19.28	peak
18740.000	31.25	13.40	44.65	54.00	-9.35	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

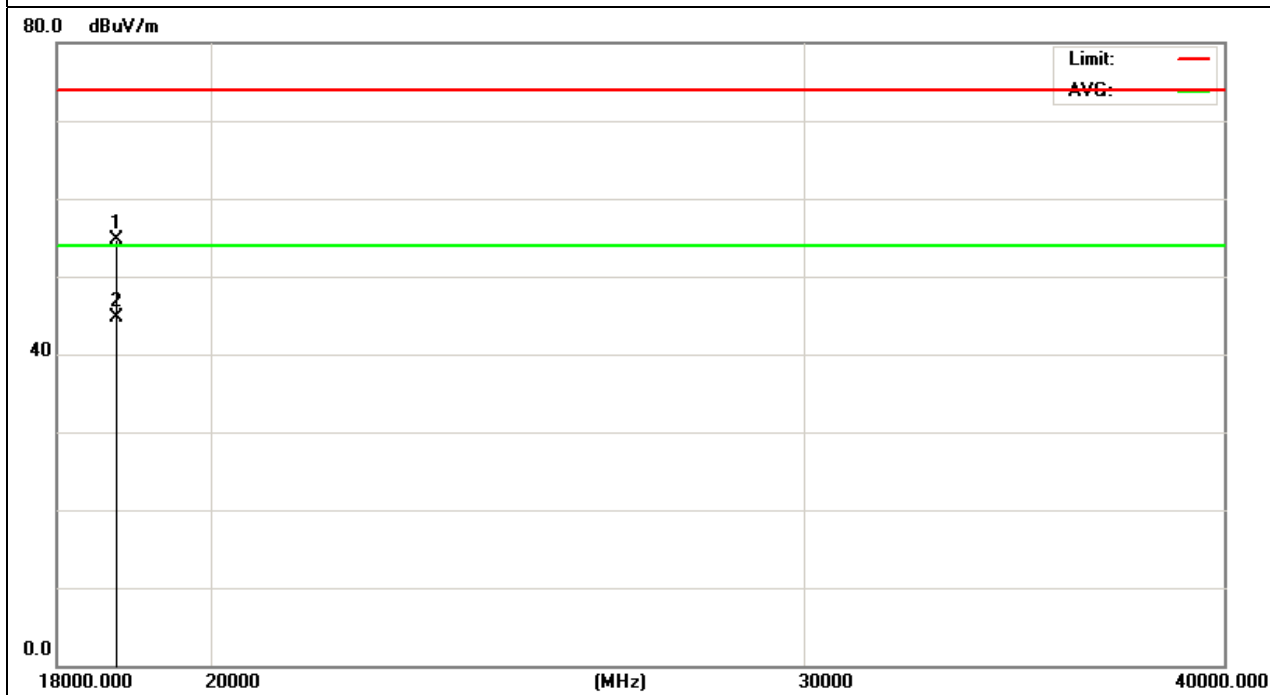

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 120	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1756.321	45.92	-9.46	36.46	74.00	-37.54	peak
2845.984	44.02	-2.63	41.39	74.00	-32.61	peak
3946.521	43.01	3.44	46.45	74.00	-27.55	peak
4355.840	45.02	4.45	49.47	74.00	-24.53	peak
6754.841	43.58	6.02	49.60	74.00	-24.40	peak
17783.022	32.56	24.83	57.39	74.00	-16.61	peak
17783.022	21.32	24.83	46.15	54.00	-7.85	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

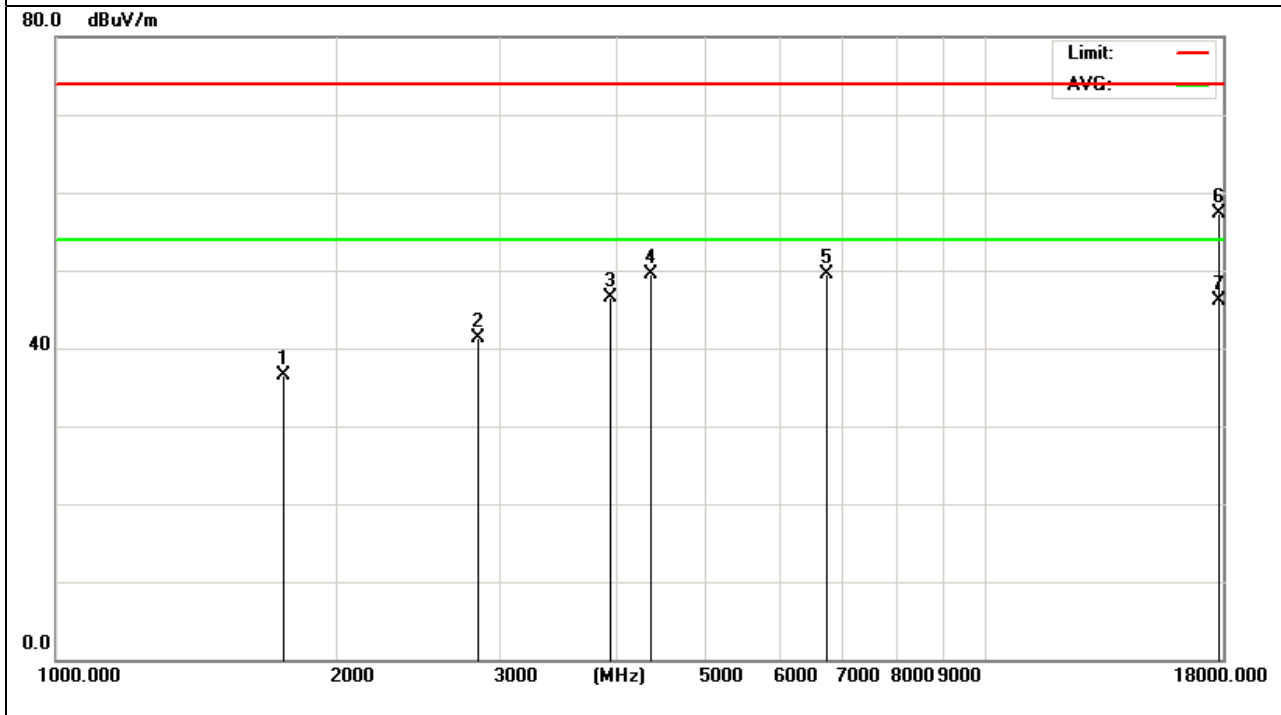

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 120	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1839.582	45.89	-9.42	36.47	74.00	-37.53	peak
3011.294	43.32	-1.65	41.67	74.00	-32.33	peak
4356.786	43.85	4.45	48.30	74.00	-25.70	peak
4855.369	44.26	5.11	49.37	74.00	-24.63	peak
8020.458	42.01	10.41	52.42	74.00	-21.58	peak
17585.330	33.36	24.98	58.34	74.00	-15.66	peak
17585.330	23.02	24.98	48.00	54.00	-6.00	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

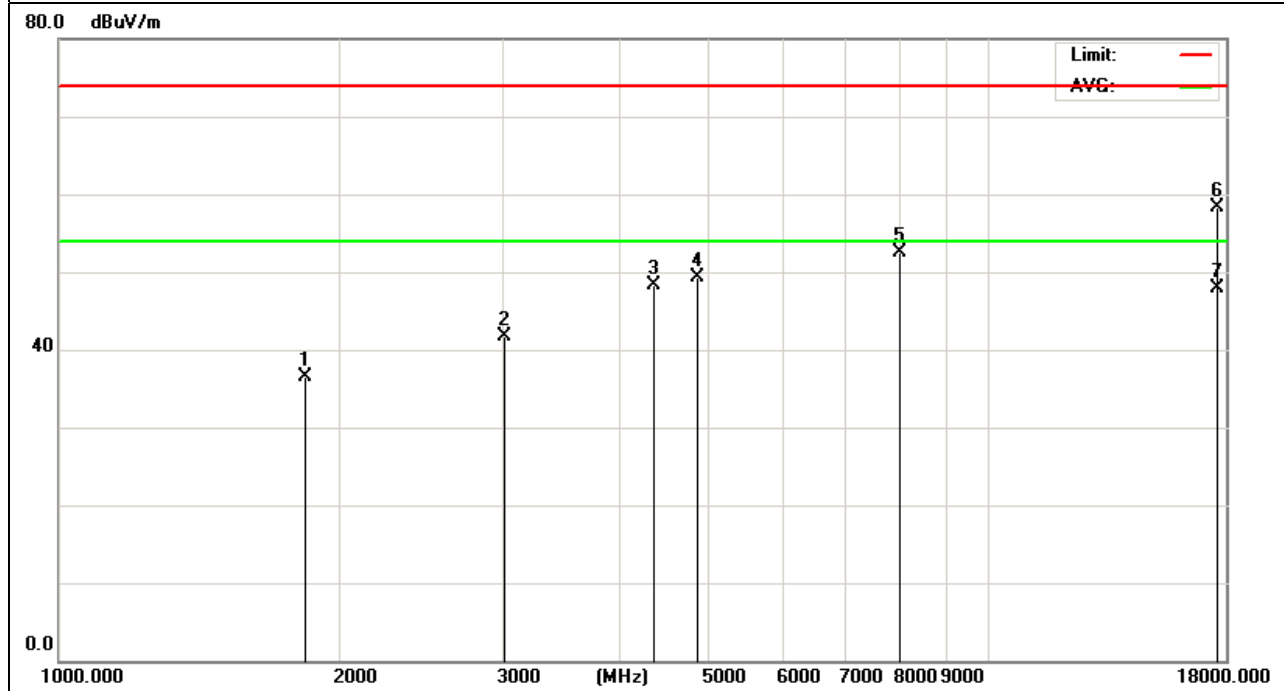

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 120	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19885.000	40.31	15.09	55.40	74.00	-18.60	peak
19885.000	30.78	15.09	45.87	54.00	-8.13	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

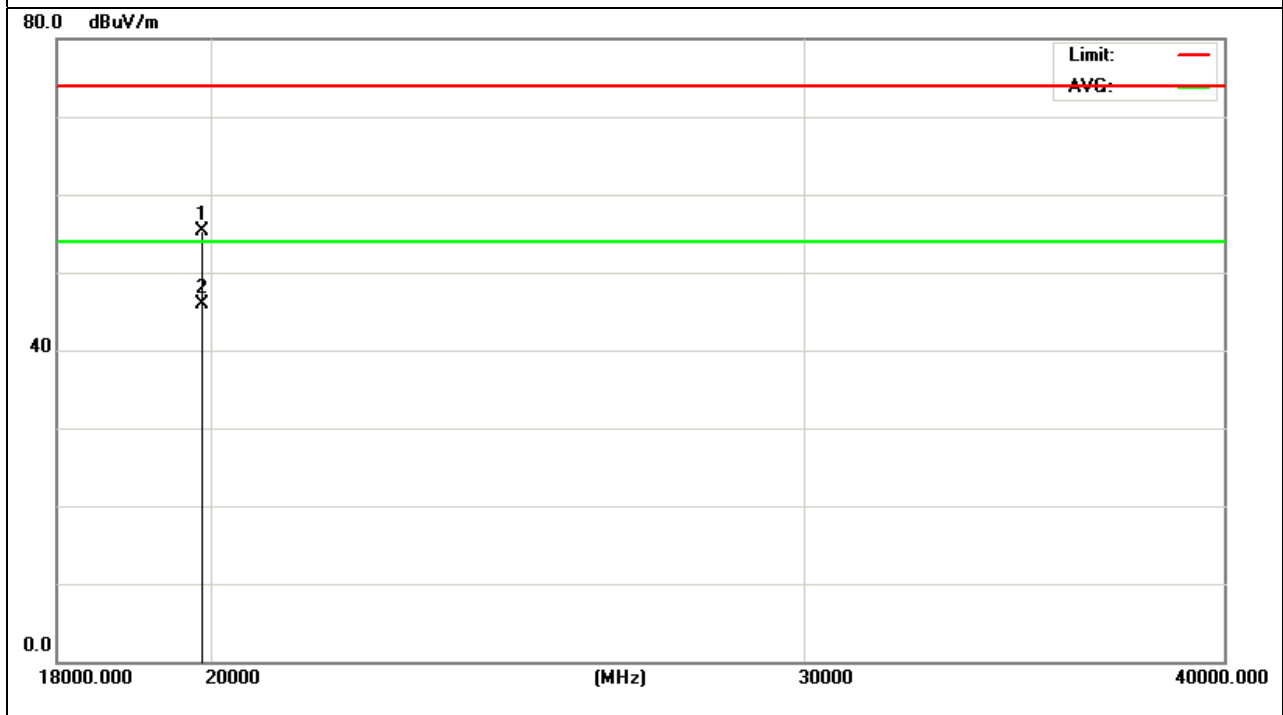

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 120	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18845.000	42.65	13.56	56.21	74.00	-17.79	peak
18845.000	32.32	13.56	45.88	54.00	-8.12	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

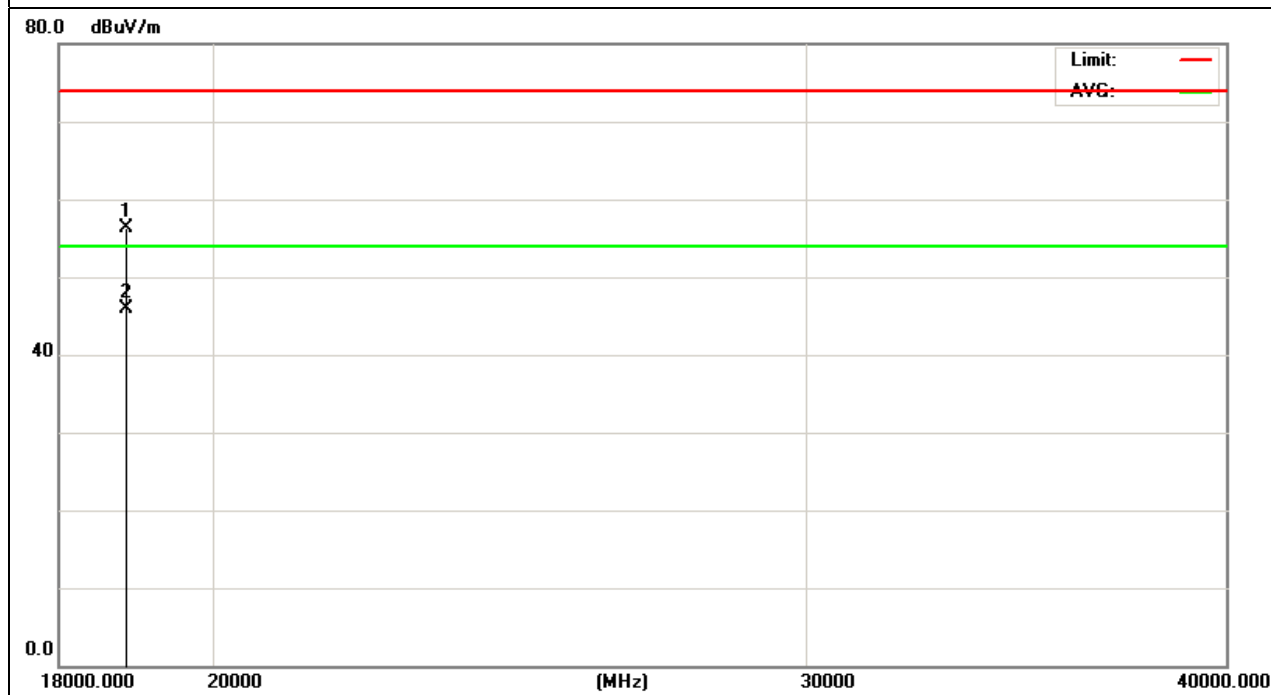

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 140	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1896.332	45.88	-9.51	36.37	74.00	-37.63	peak
2843.452	44.21	-2.64	41.57	74.00	-32.43	peak
3949.679	43.03	3.47	46.50	74.00	-27.50	peak
4360.112	45.20	4.45	49.65	74.00	-24.35	peak
6753.123	44.31	6.02	50.33	74.00	-23.67	peak
17557.668	32.59	24.99	57.58	74.00	-16.42	peak
17557.668	23.02	24.99	48.01	54.00	-5.99	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

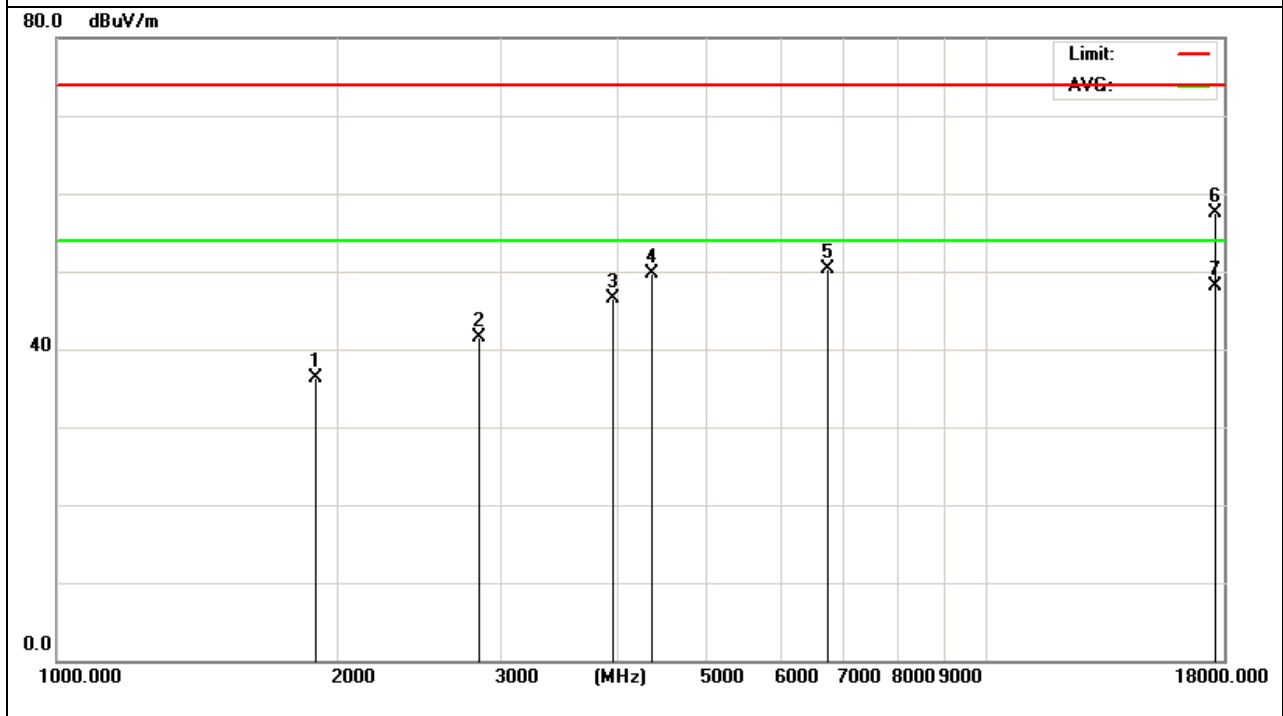

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 140	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1740.221	45.95	-9.52	36.43	74.00	-37.57	peak
3010.695	42.09	-1.65	40.44	74.00	-33.56	peak
4353.841	43.89	4.44	48.33	74.00	-25.67	peak
4862.974	44.32	5.13	49.45	74.00	-24.55	peak
8013.844	41.26	10.40	51.66	74.00	-22.34	peak
17666.555	33.85	24.92	58.77	74.00	-15.23	peak
17666.555	22.66	24.92	47.58	54.00	-6.42	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

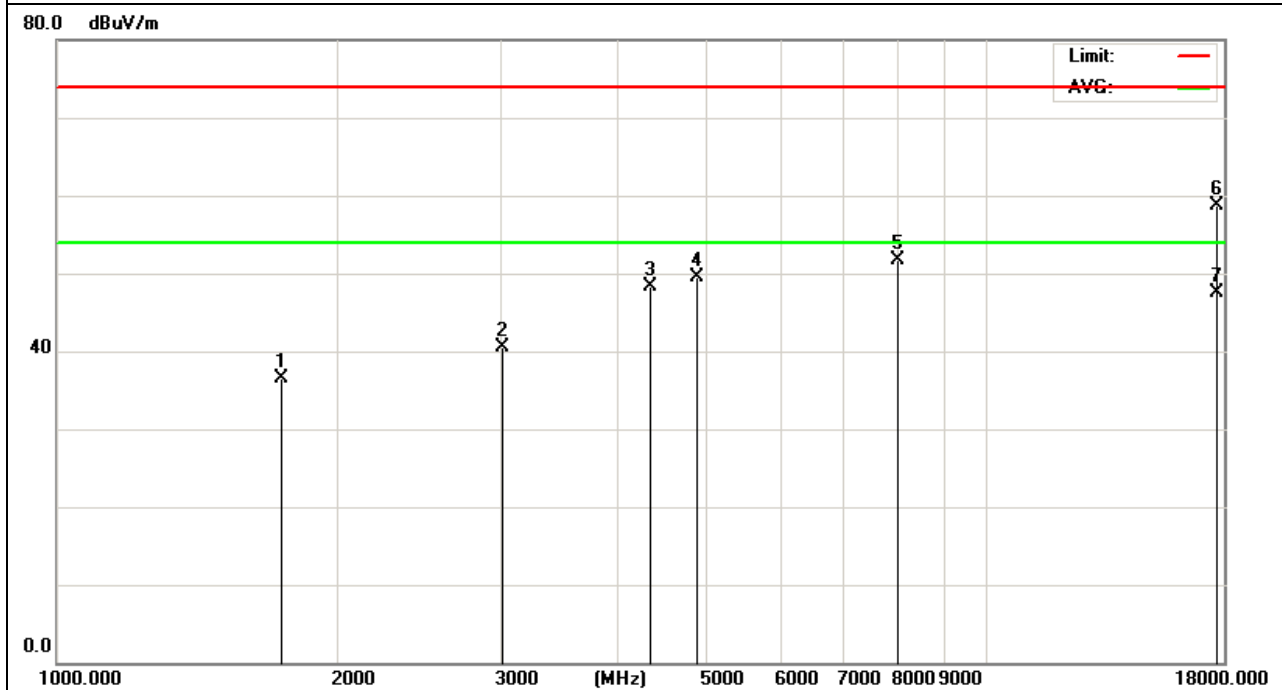

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 140	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20258.000	40.32	15.65	55.97	74.00	-18.03	peak
20258.000	30.54	15.65	46.19	54.00	-7.81	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

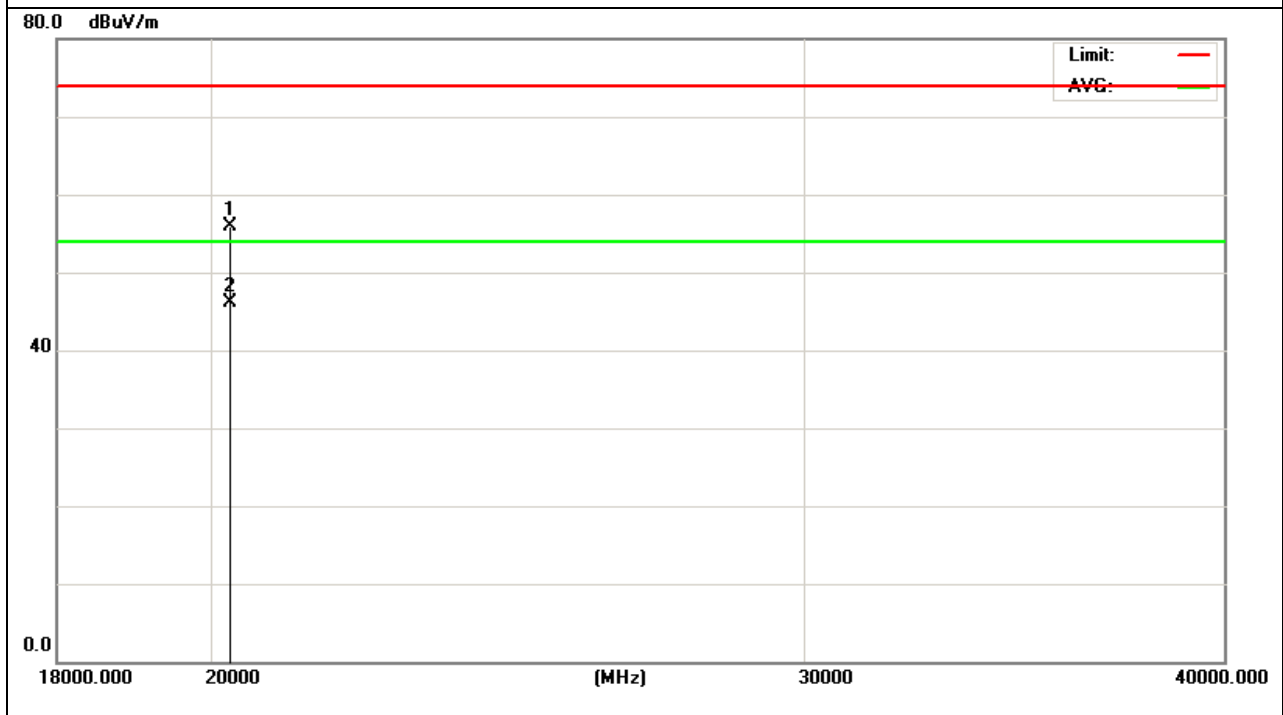

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11a Channel 140	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19568.000	39.69	14.62	54.31	74.00	-19.69	peak
19568.000	30.24	14.62	44.86	54.00	-9.14	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

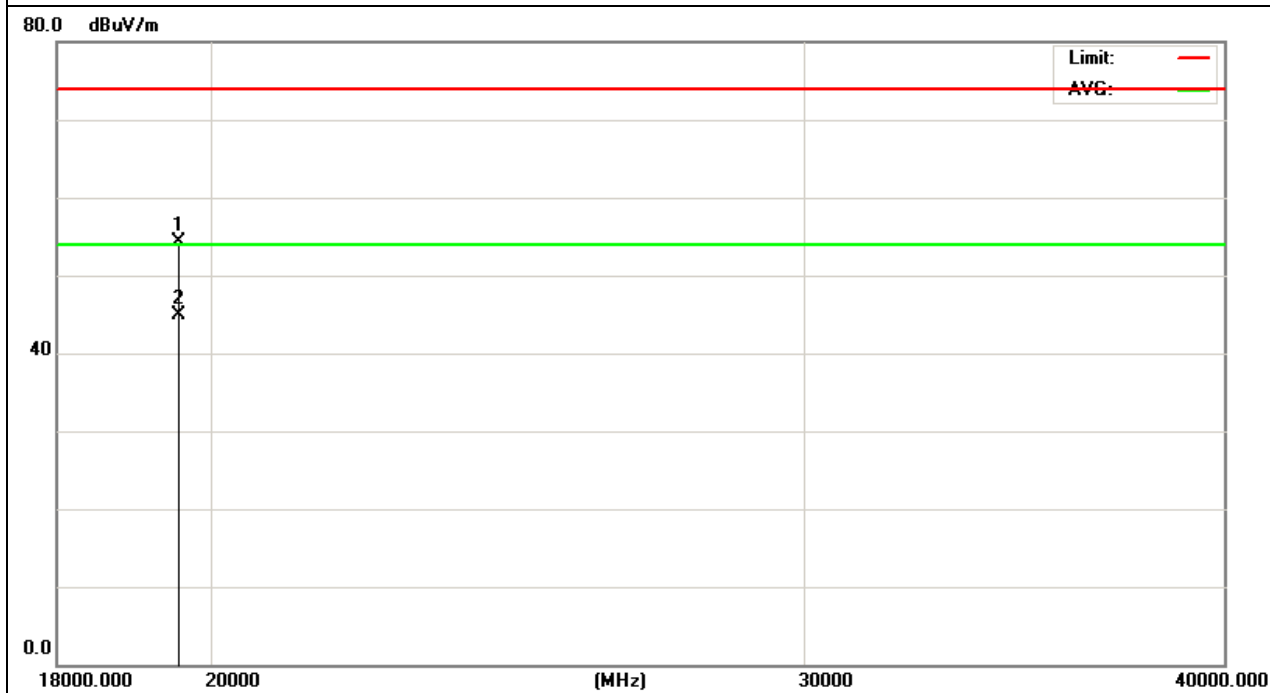

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 100	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1755.489	46.21	-9.46	36.75	74.00	-37.25	peak
2843.695	43.61	-2.65	40.96	74.00	-33.04	peak
3956.789	42.87	3.52	46.39	74.00	-27.61	peak
4358.021	45.89	4.45	50.34	74.00	-23.66	peak
6777.950	44.21	6.03	50.24	74.00	-23.76	peak
17562.328	32.87	24.99	57.86	74.00	-16.14	peak
17562.328	22.25	24.99	47.24	54.00	-6.76	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

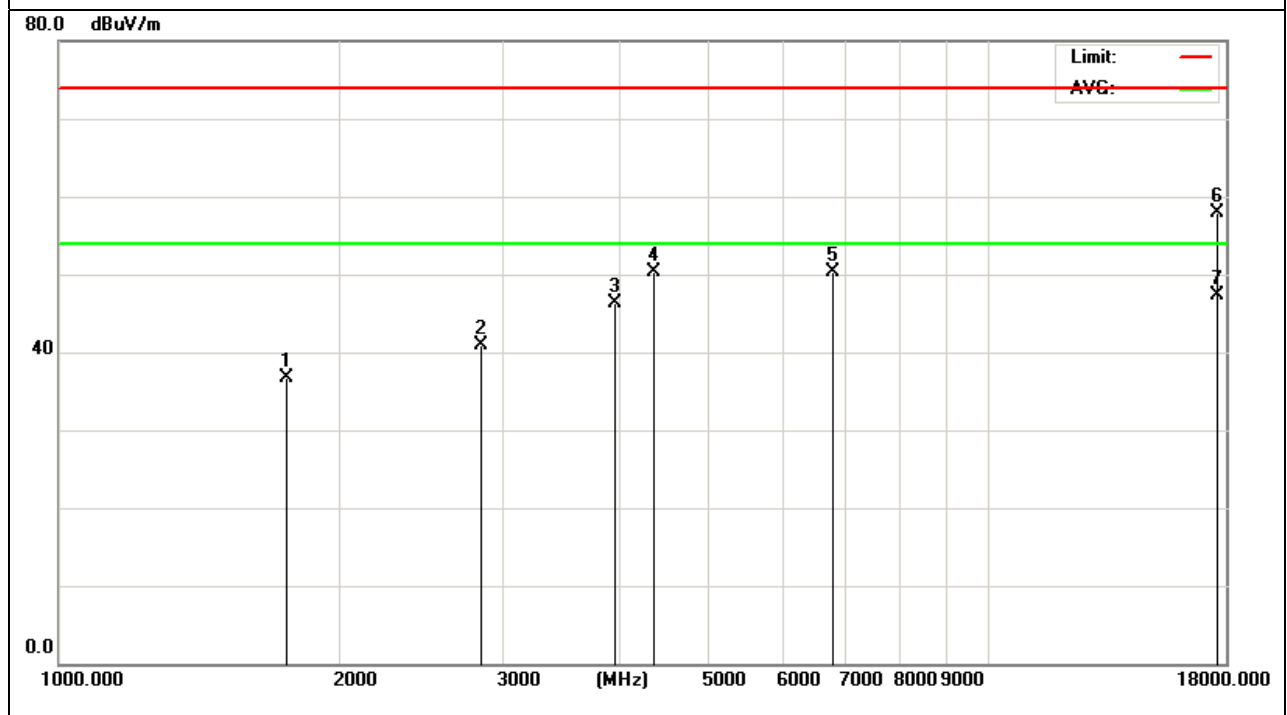

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 100	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1748.982	46.01	-9.49	36.52	74.00	-37.48	peak
3020.247	42.87	-1.63	41.24	74.00	-32.76	peak
4332.213	43.69	4.40	48.09	74.00	-25.91	peak
6845.360	43.23	6.08	49.31	74.00	-24.69	peak
8020.478	40.67	10.41	51.08	74.00	-22.92	peak
17680.112	32.59	24.90	57.49	74.00	-16.51	peak
17680.112	22.68	24.90	47.58	54.00	-6.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

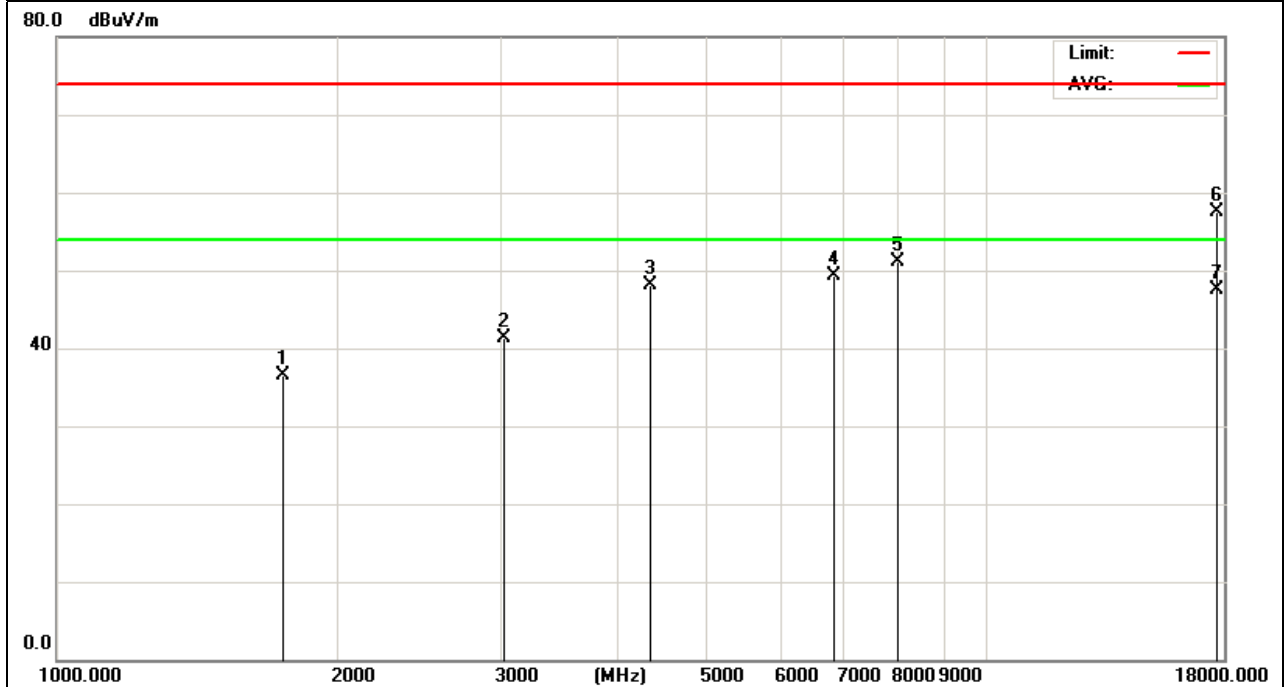

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 100	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
19648.000	40.56	14.74	55.30	74.00	-18.70	
19648.000	30.78	14.74	45.52	54.00	-8.48	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 100	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18899.000	41.35	13.64	54.99	74.00	-19.01	peak
18899.000	32.01	13.64	45.65	54.00	-8.35	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

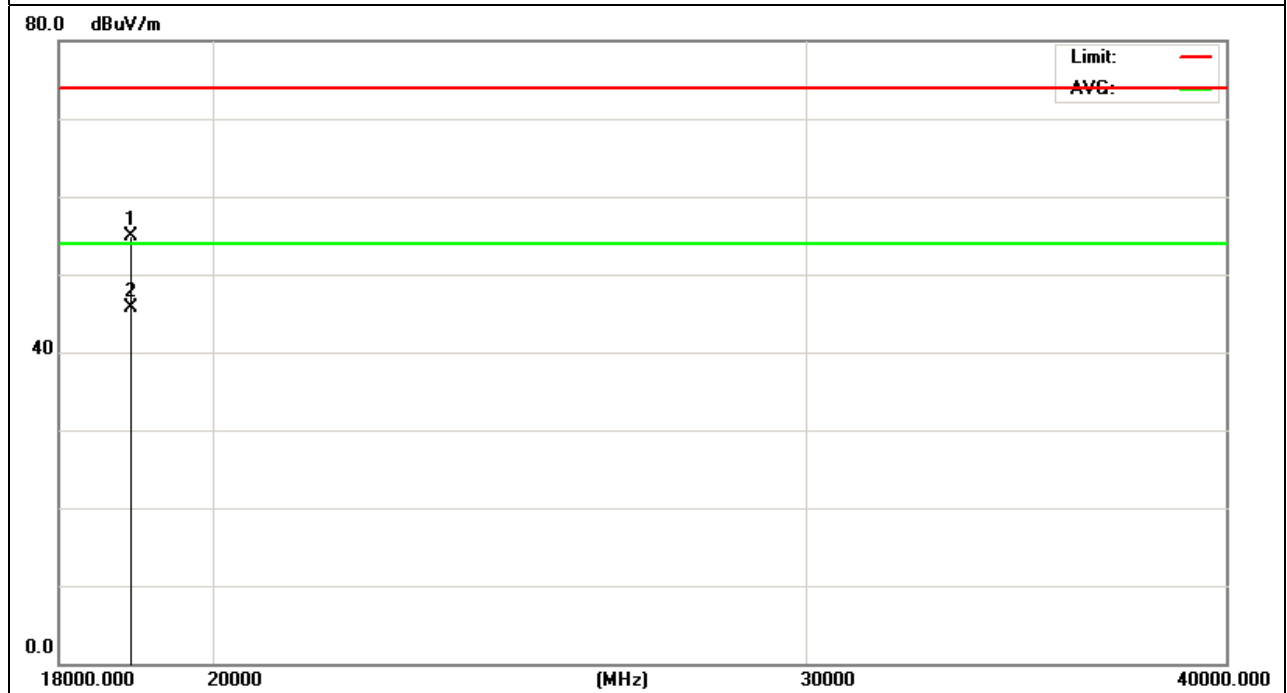

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 120	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1775.692	46.09	-9.41	36.68	74.00	-37.32	peak
2850.321	44.91	-2.61	42.30	74.00	-31.70	peak
3977.456	43.21	3.67	46.88	74.00	-27.12	peak
4379.694	45.36	4.49	49.85	74.00	-24.15	peak
6756.320	44.78	6.02	50.80	74.00	-23.20	peak
17703.224	32.34	24.89	57.23	74.00	-16.77	peak
17703.224	22.01	24.89	46.90	54.00	-7.10	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

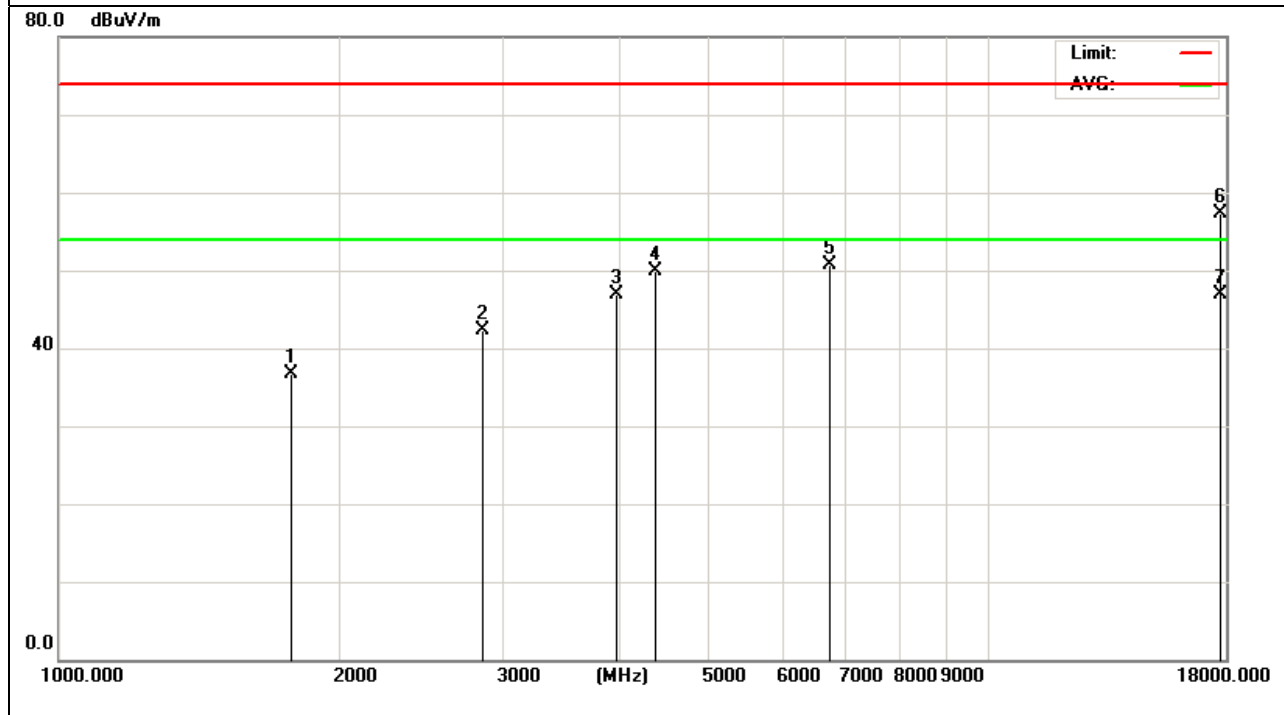

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 120	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1840.692	45.87	-9.42	36.45	74.00	-37.55	peak
3023.771	43.06	-1.62	41.44	74.00	-32.56	peak
4364.786	42.57	4.46	47.03	74.00	-26.97	peak
4853.886	43.20	5.11	48.31	74.00	-25.69	peak
8013.645	41.27	10.40	51.67	74.00	-22.33	peak
17745.995	33.69	24.86	58.55	74.00	-15.45	peak
17745.995	22.88	24.86	47.74	54.00	-6.26	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

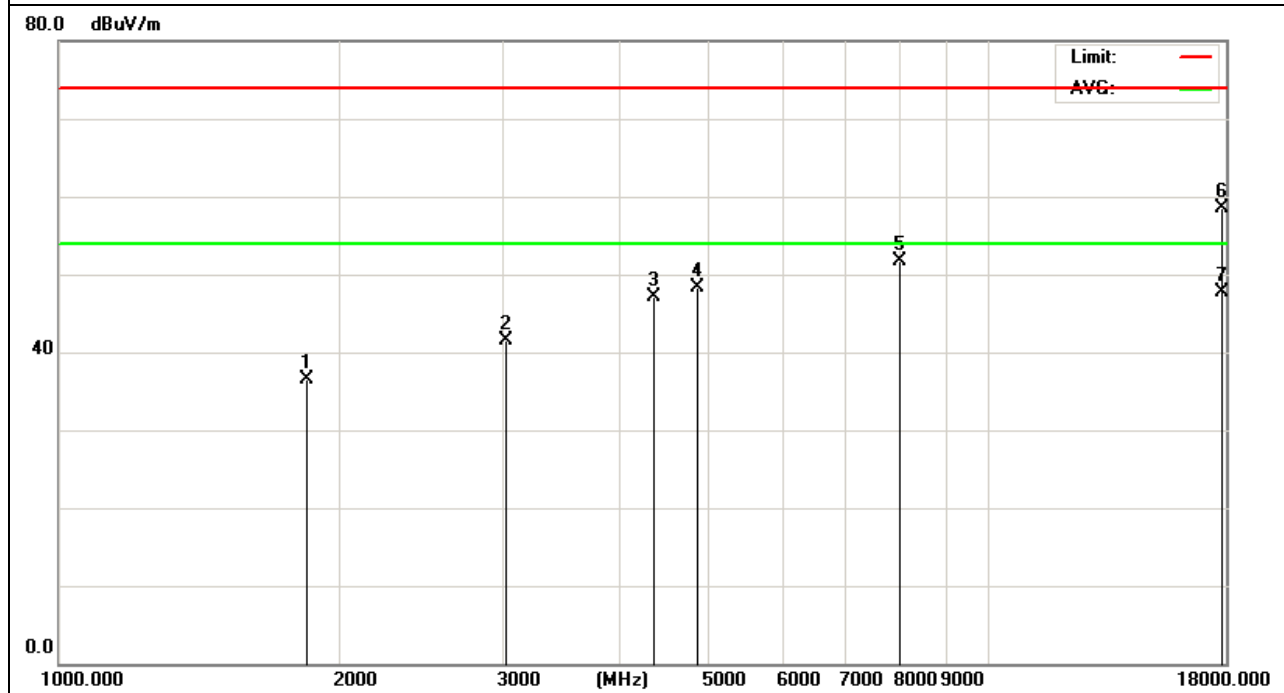

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 120	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19054.000	41.67	13.87	55.54	74.00	-18.46	peak
19054.000	32.58	13.87	46.45	54.00	-7.55	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

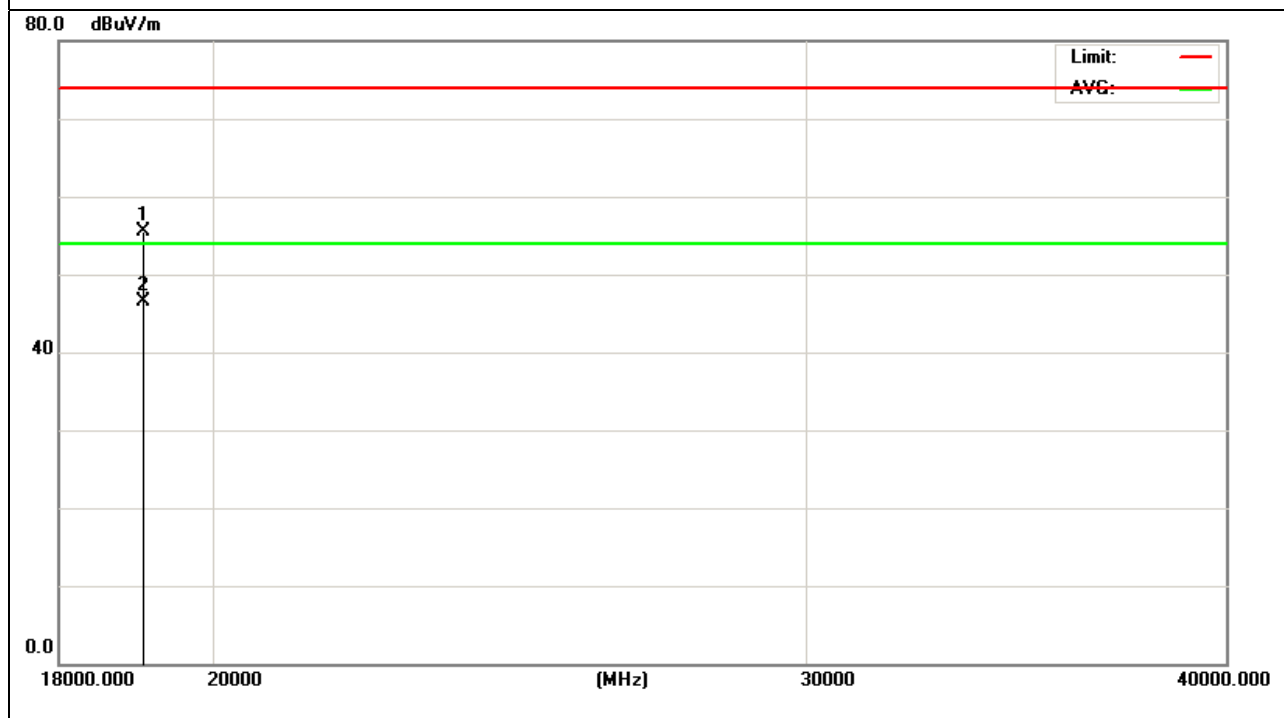

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 120	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20356.000	39.58	15.80	55.38	74.00	-18.62	peak
20356.000	30.30	15.80	46.10	54.00	-7.90	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

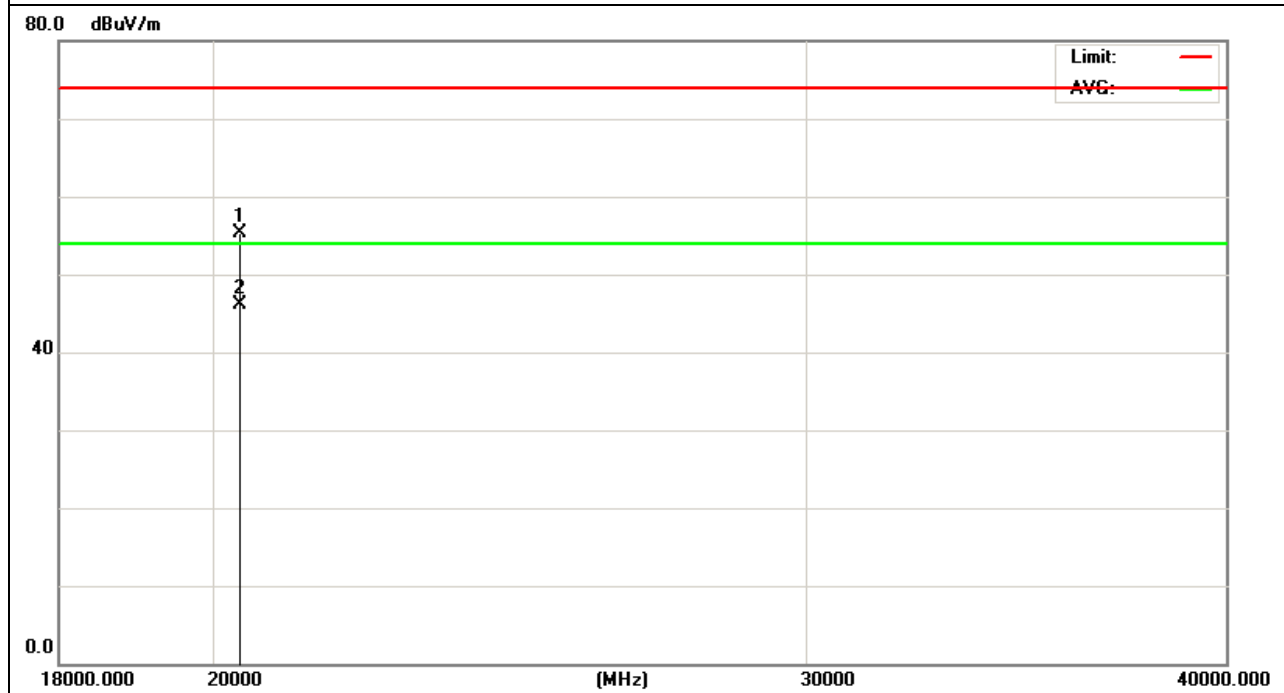

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 140	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1784.965	46.02	-9.38	36.64	74.00	-37.36	peak
2844.321	43.68	-2.64	41.04	74.00	-32.96	peak
3946.823	42.21	3.45	45.66	74.00	-28.34	peak
4332.620	44.29	4.40	48.69	74.00	-25.31	peak
6778.220	43.81	6.03	49.84	74.00	-24.16	peak
17880.220	32.77	24.76	57.53	74.00	-16.47	peak
17880.220	21.69	24.76	46.45	54.00	-7.55	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

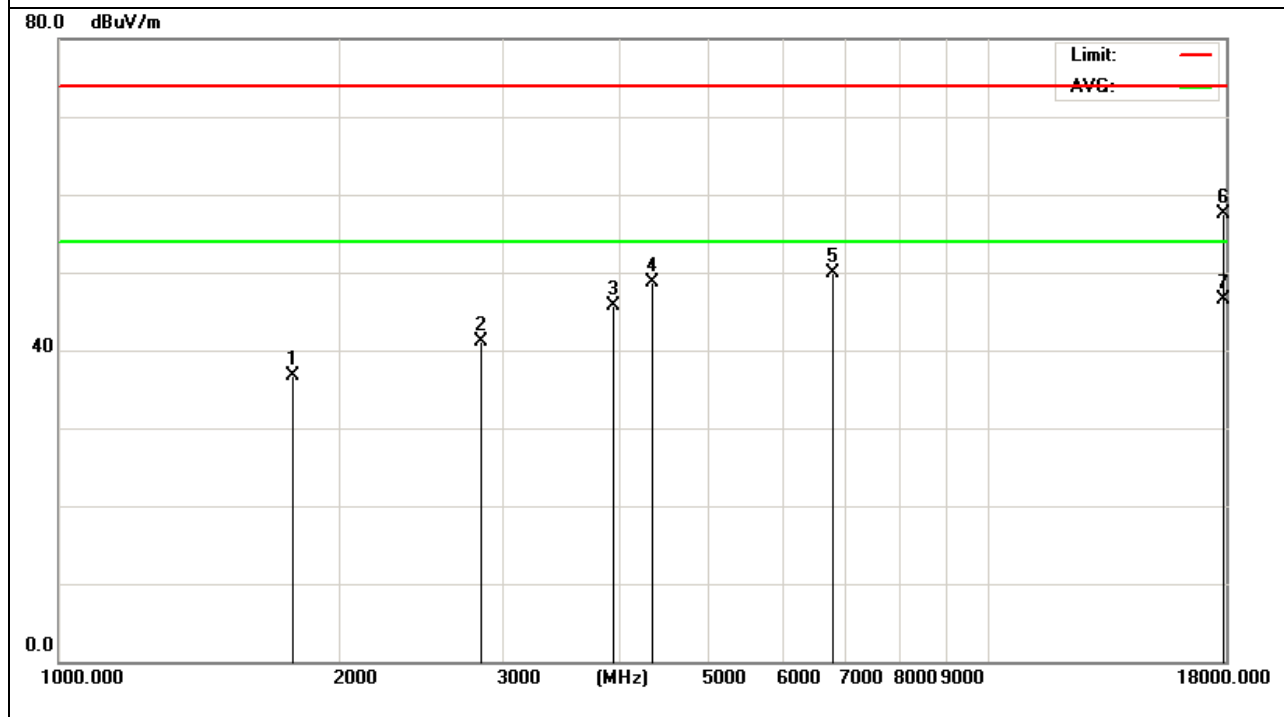

EUT :	Panel PC 平板电脑	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 140	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1849.620	45.85	-9.43	36.42	74.00	-37.58	peak
3025.890	42.01	-1.62	40.39	74.00	-33.61	peak
4310.395	44.52	4.35	48.87	74.00	-25.13	peak
4862.147	44.32	5.12	49.44	74.00	-24.56	peak
8015.848	42.02	10.40	52.42	74.00	-21.58	peak
17763.681	33.54	24.85	58.39	74.00	-15.61	peak
17763.681	21.54	24.85	46.39	54.00	-7.61	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

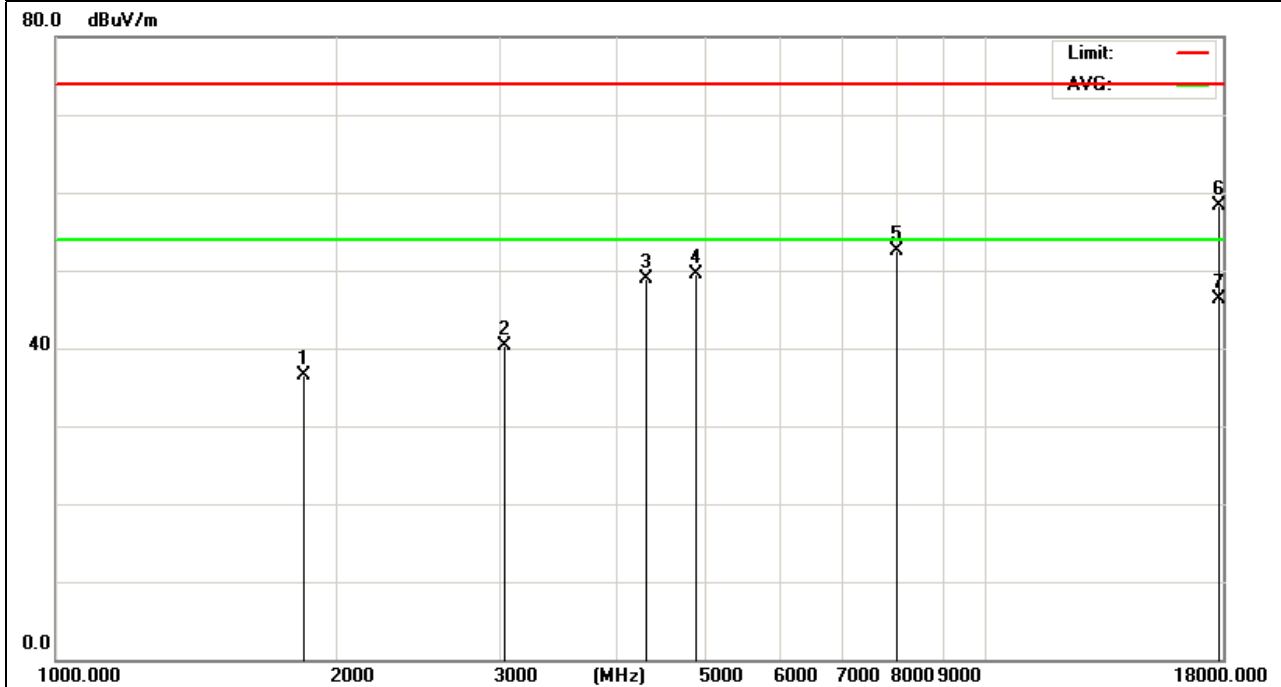

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 140	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
18451.000	43.08	12.97	56.05	74.00	-17.95	peak
18451.000	32.58	12.97	45.55	54.00	-8.45	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

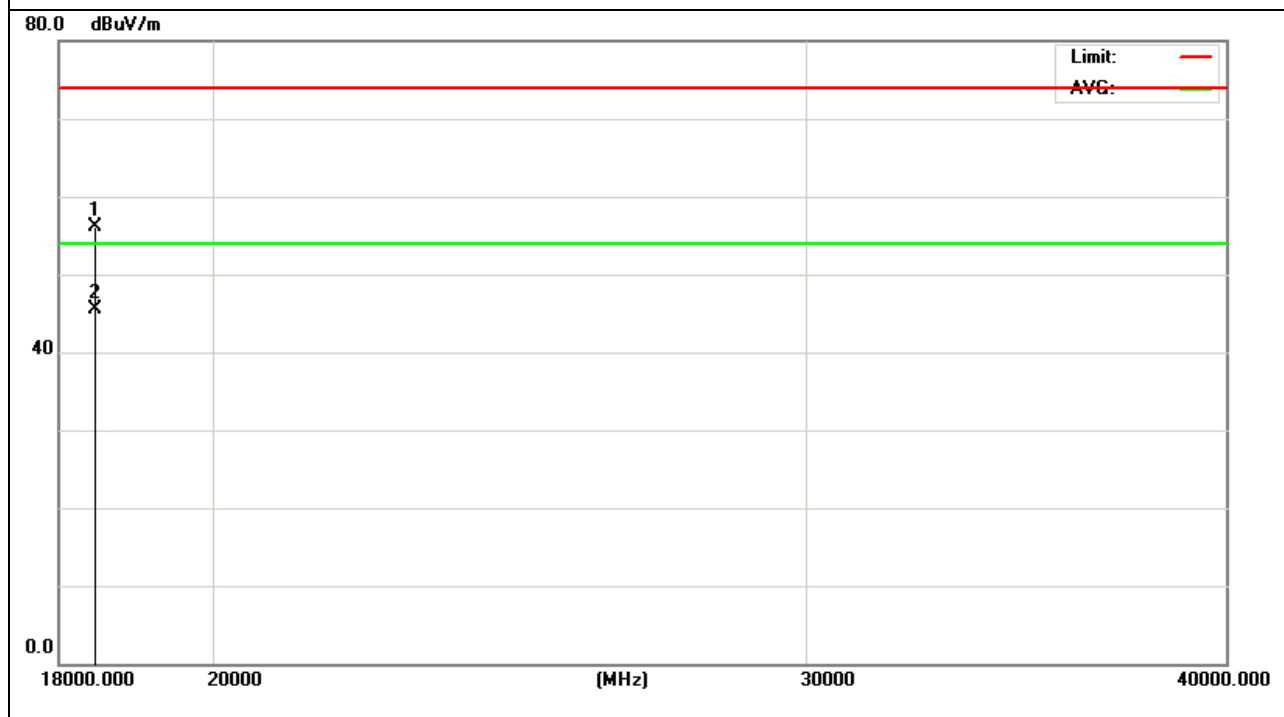

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n20 Channel 140	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18662.000	41.86	13.28	55.14	74.00	-18.86	peak
18662.000	31.89	13.28	45.17	54.00	-8.83	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

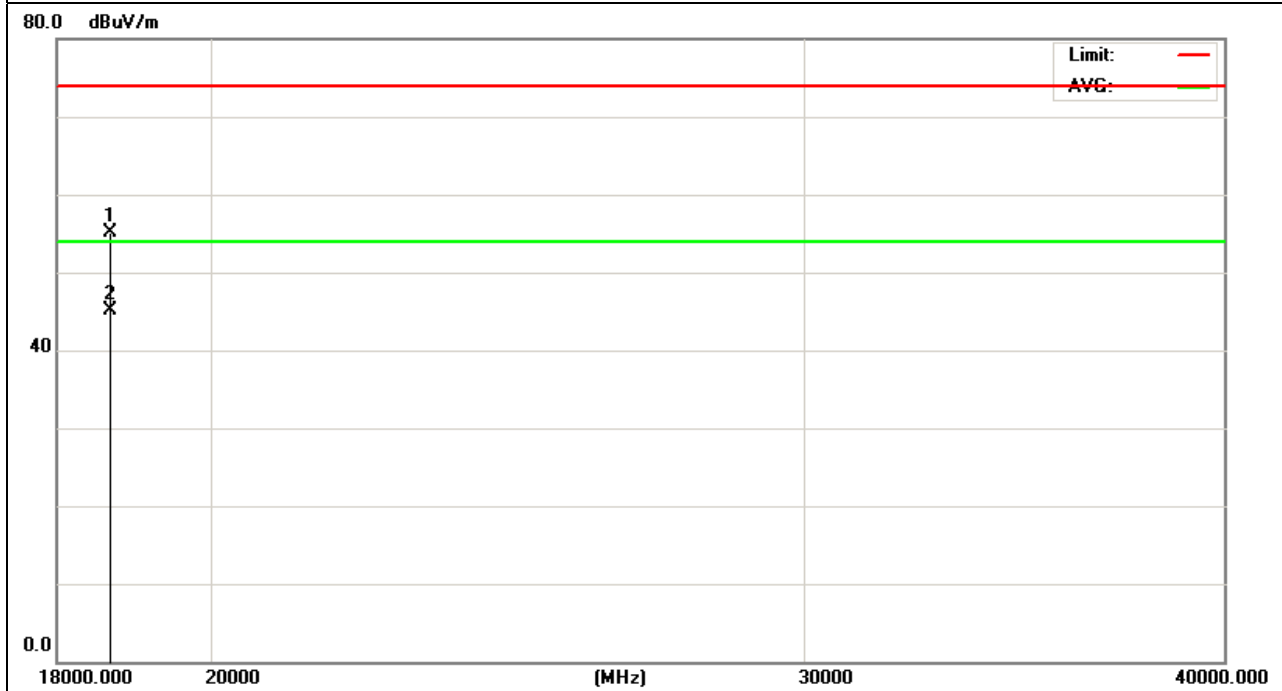

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 102	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1643.842	45.84	-9.79	36.05	74.00	-37.95	peak
2843.691	44.81	-2.65	42.16	74.00	-31.84	peak
3947.846	43.12	3.45	46.57	74.00	-27.43	peak
4334.938	46.01	4.40	50.41	74.00	-23.59	peak
6735.552	43.95	6.00	49.95	74.00	-24.05	peak
17740.210	32.54	24.86	57.40	74.00	-16.60	peak
17740.210	22.31	24.86	47.17	54.00	-6.83	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

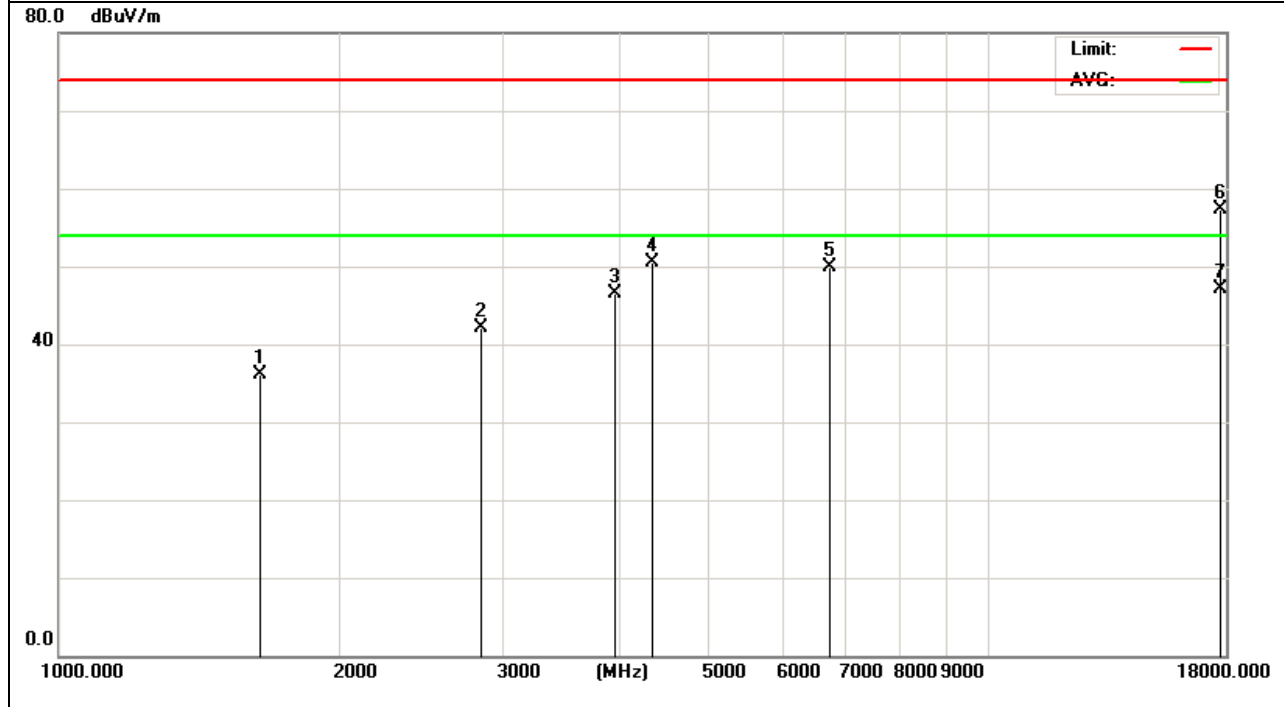

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 102	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1968.841	45.91	-9.22	36.69	74.00	-37.31	peak
3010.241	43.01	-1.65	41.36	74.00	-32.64	peak
4354.948	43.69	4.45	48.14	74.00	-25.86	peak
6854.221	42.78	6.09	48.87	74.00	-25.13	peak
8011.789	41.23	10.40	51.63	74.00	-22.37	peak
17658.294	33.84	24.92	58.76	74.00	-15.24	peak
17658.294	22.54	24.92	47.46	54.00	-6.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

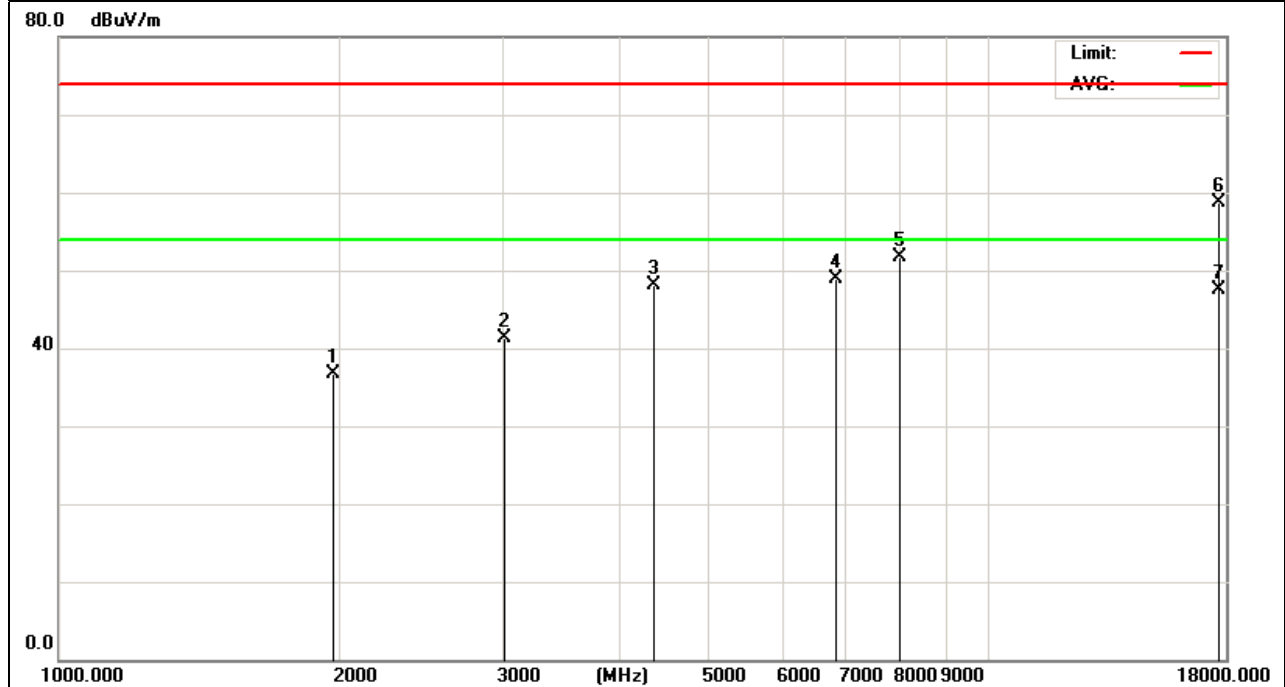

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 102	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20664.000	40.51	16.25	56.76	74.00	-17.24	peak
20664.000	30.23	16.25	46.48	54.00	-7.52	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 102	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18969.000	42.62	13.74	56.36	74.00	-17.64	peak
18969.000	32.20	13.74	45.94	54.00	-8.06	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

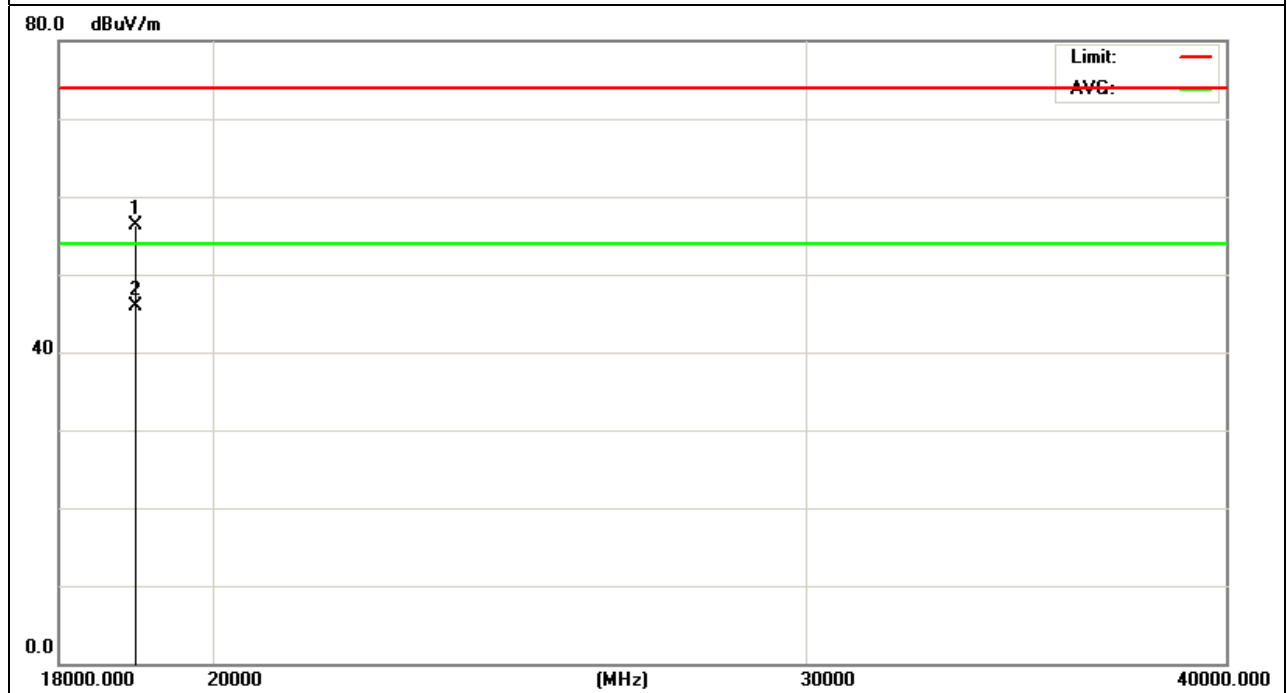

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 118	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1795.332	46.18	-9.35	36.83	74.00	-37.17	peak
2845.841	44.31	-2.63	41.68	74.00	-32.32	peak
3954.321	42.02	3.50	45.52	74.00	-28.48	peak
4395.668	44.52	4.52	49.04	74.00	-24.96	peak
6787.347	43.67	6.04	49.71	74.00	-24.29	peak
17662.662	32.48	24.92	57.40	74.00	-16.60	peak
17662.662	22.34	24.92	47.26	54.00	-6.74	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

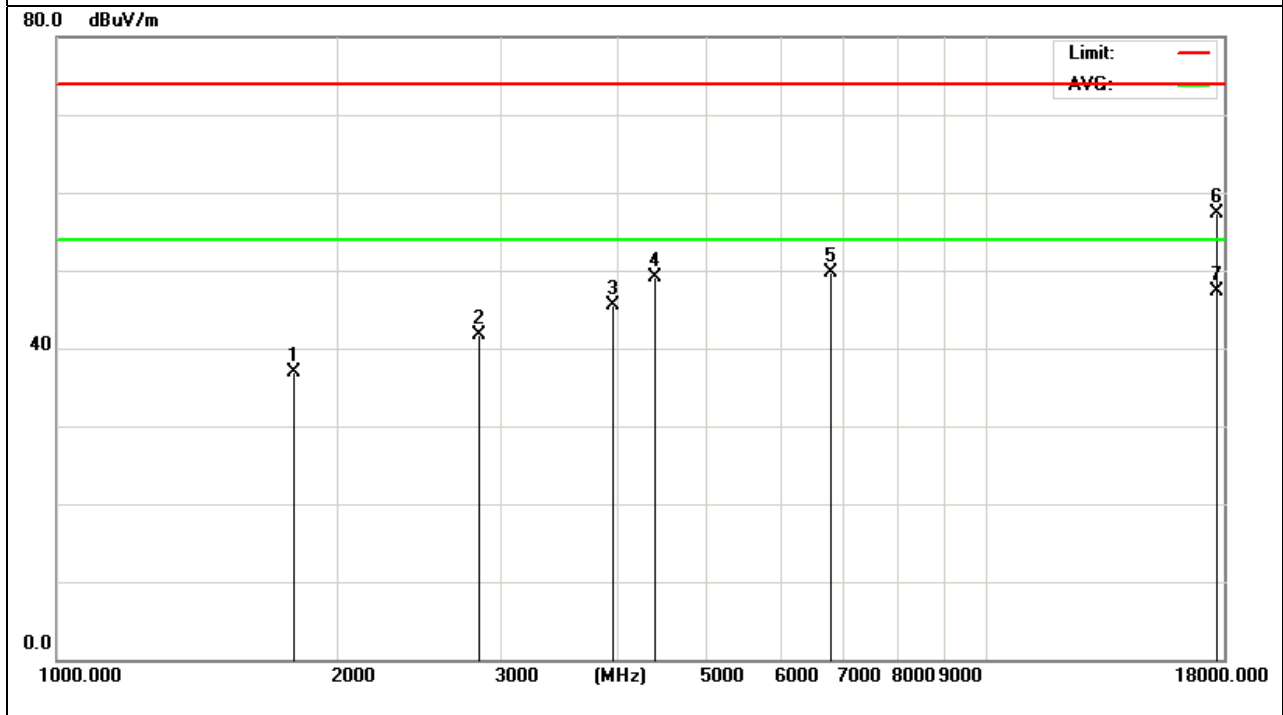

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 118	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1800.228	45.95	-9.34	36.61	74.00	-37.39	peak
3020.892	42.45	-1.63	40.82	74.00	-33.18	peak
4355.952	43.62	4.45	48.07	74.00	-25.93	peak
4854.671	43.36	5.11	48.47	74.00	-25.53	peak
8025.941	41.23	10.41	51.64	74.00	-22.36	peak
17896.057	33.41	24.75	58.16	74.00	-15.84	peak
17896.057	21.96	24.75	46.71	54.00	-7.29	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

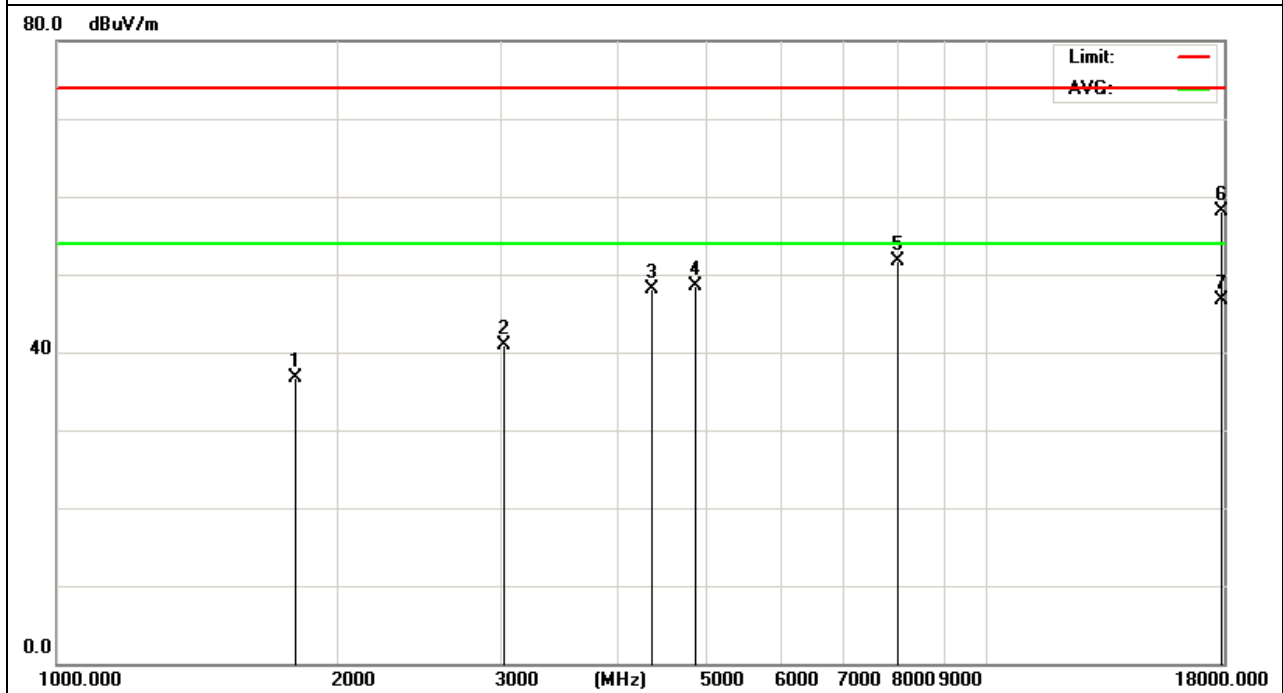

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 118	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18845.000	42.01	13.56	55.57	74.00	-18.43	peak
18845.000	32.36	13.56	45.92	54.00	-8.08	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

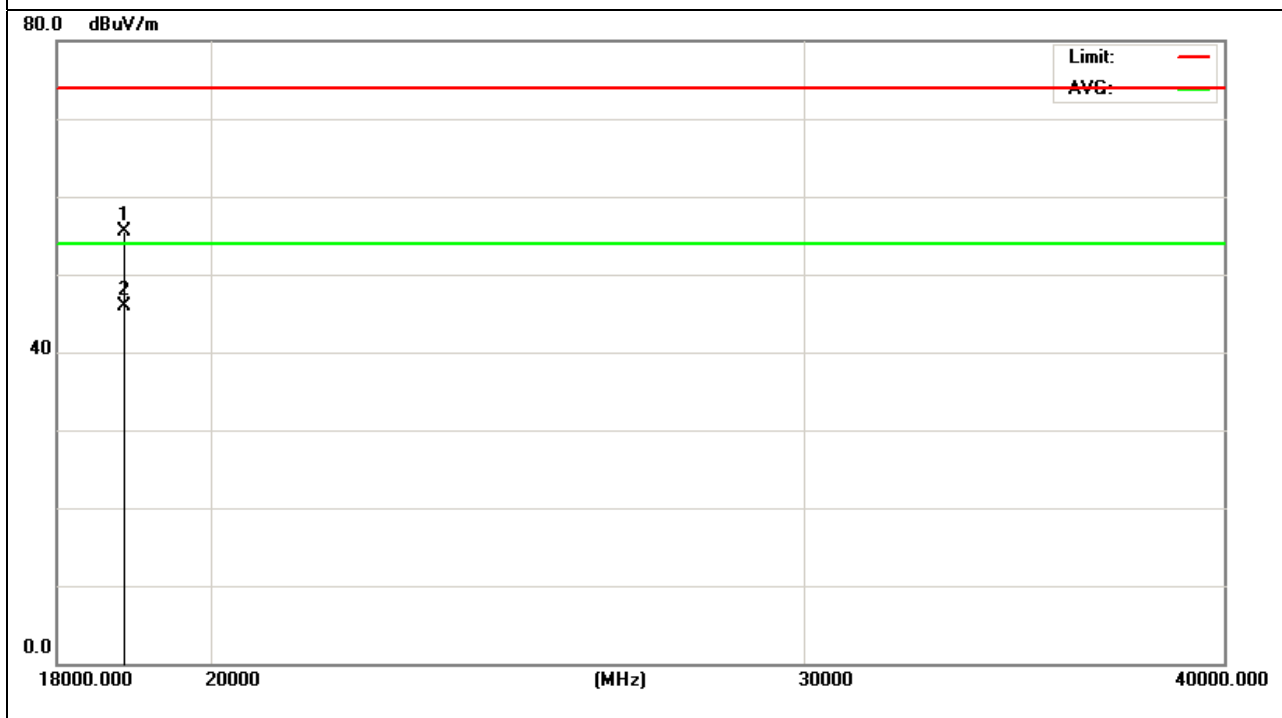

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 118	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19856.000	40.61	15.05	55.66	74.00	-18.34	peak
19856.000	30.88	15.05	45.93	54.00	-8.07	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

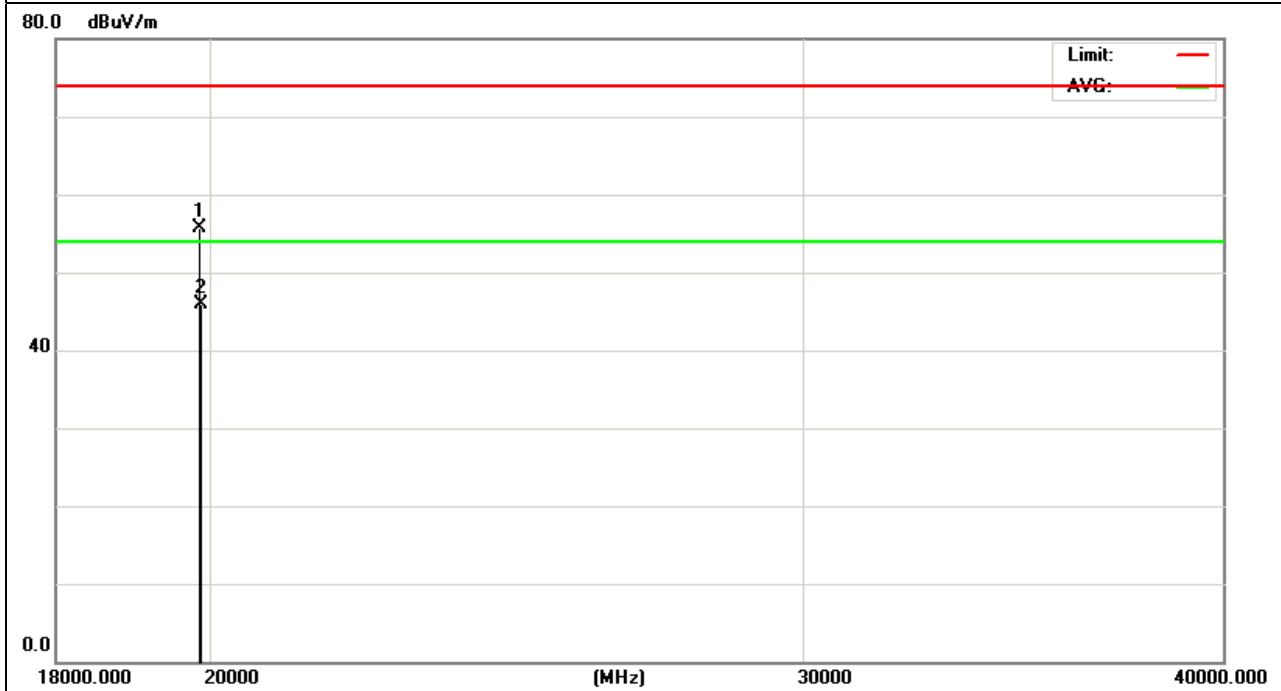

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 134	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1650.332	46.02	-9.76	36.26	74.00	-37.74	peak
2844.695	43.78	-2.64	41.14	74.00	-32.86	peak
3945.227	42.76	3.43	46.19	74.00	-27.81	peak
4358.236	43.50	4.45	47.95	74.00	-26.05	peak
6778.327	43.96	6.03	49.99	74.00	-24.01	peak
17760.225	32.27	24.85	57.12	74.00	-16.88	peak
17760.225	22.85	24.85	47.70	54.00	-6.30	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

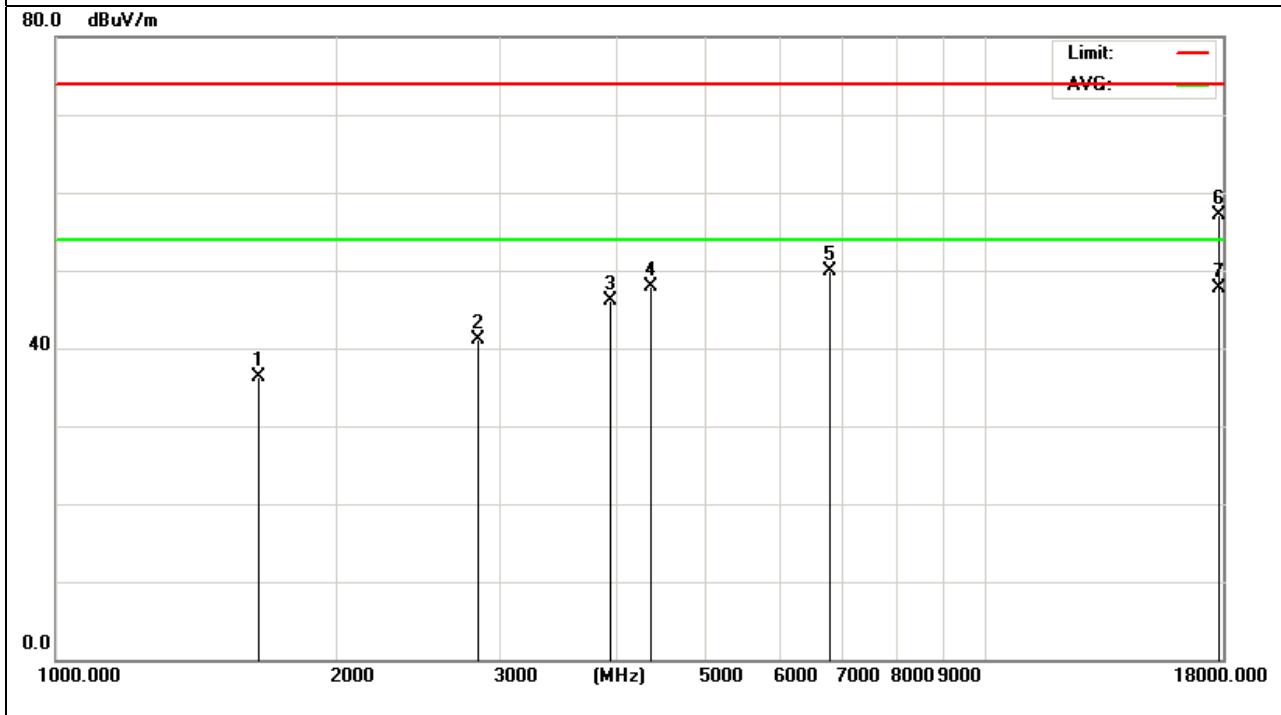

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 134	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1650.205	46.02	-9.76	36.26	74.00	-37.74	peak
3046.376	43.97	-1.57	42.40	74.00	-31.60	peak
4356.364	43.87	4.45	48.32	74.00	-25.68	peak
4856.021	43.73	5.11	48.84	74.00	-25.16	peak
8020.058	40.36	10.41	50.77	74.00	-23.23	peak
17653.023	32.45	24.93	57.38	74.00	-16.62	peak
17653.023	22.95	24.93	47.88	54.00	-6.12	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

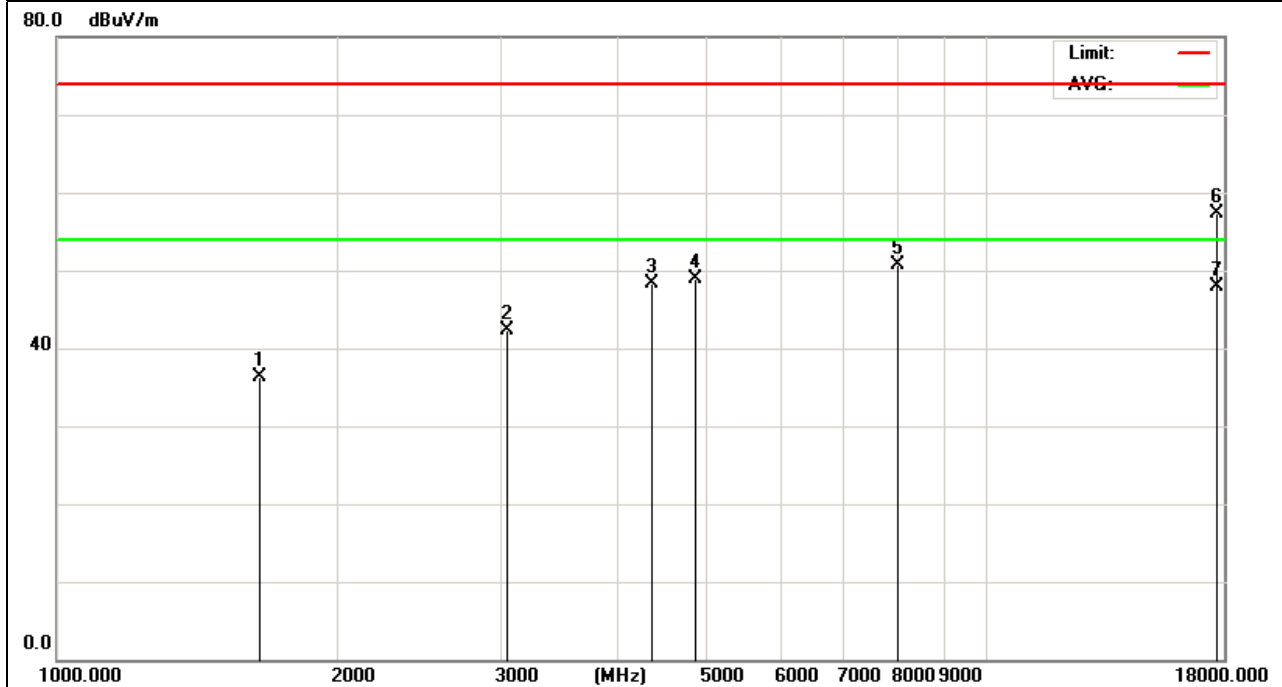

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 134	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
19584.000	40.62	14.66	55.28	74.00	-18.72	peak
19584.000	30.84	14.66	45.50	54.00	-8.50	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

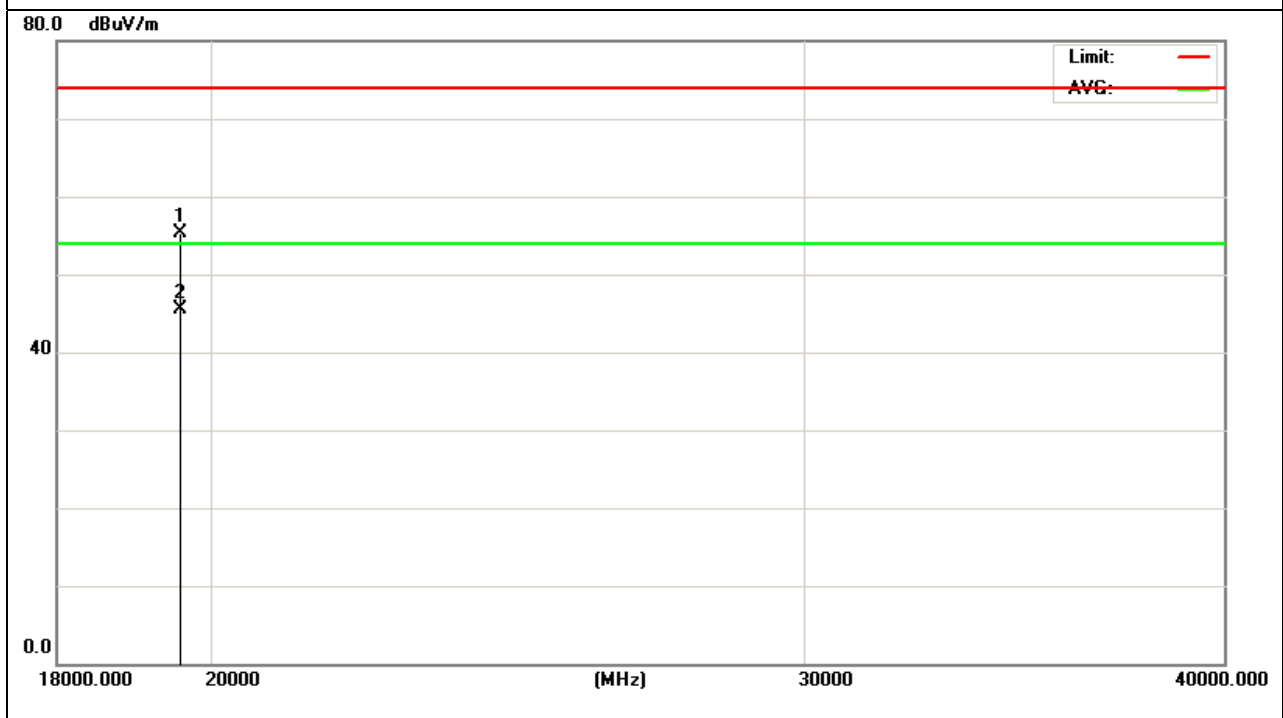

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11n40 Channel 134	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19391.000	41.94	14.36	56.30	74.00	-17.70	peak
19391.000	31.04	14.36	45.40	54.00	-8.60	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

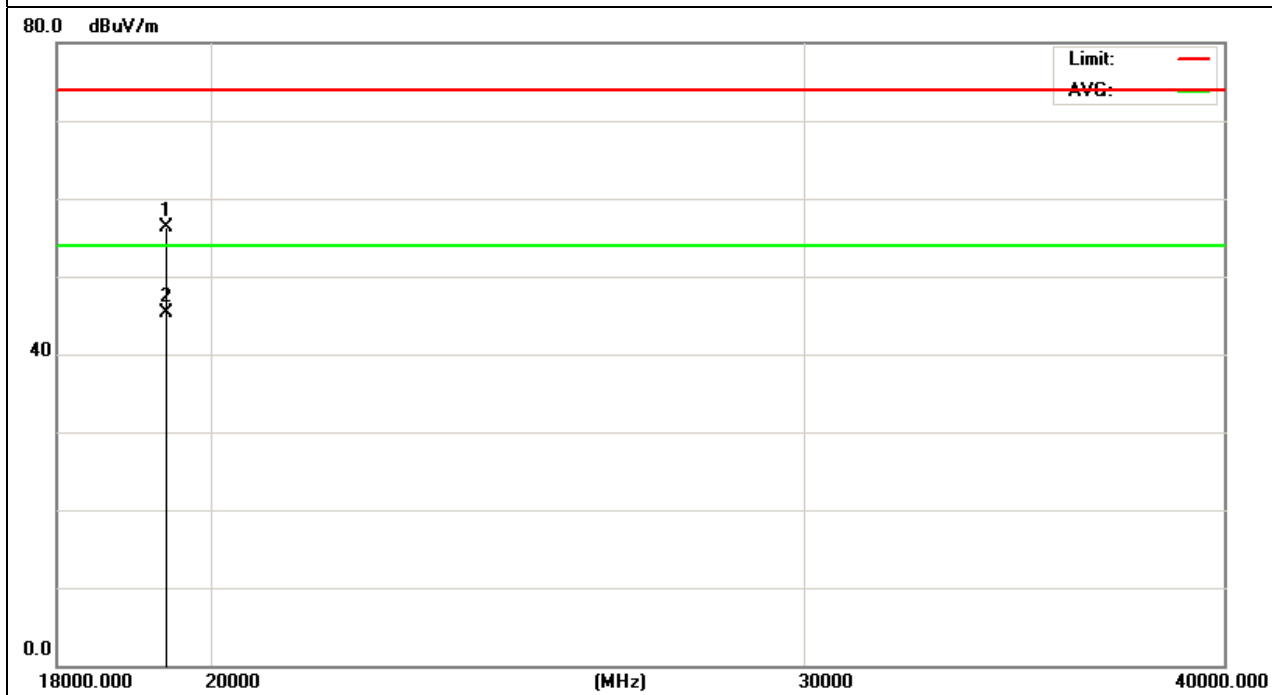

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 106	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1888.446	46.32	-9.50	36.82	74.00	-37.18	peak
2848.952	44.16	-2.62	41.54	74.00	-32.46	peak
3942.205	43.34	3.42	46.76	74.00	-27.24	peak
4364.947	46.08	4.46	50.54	74.00	-23.46	peak
6787.224	43.85	6.04	49.89	74.00	-24.11	peak
17745.229	32.64	24.86	57.50	74.00	-16.50	peak
17745.229	22.88	24.86	47.74	54.00	-6.26	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

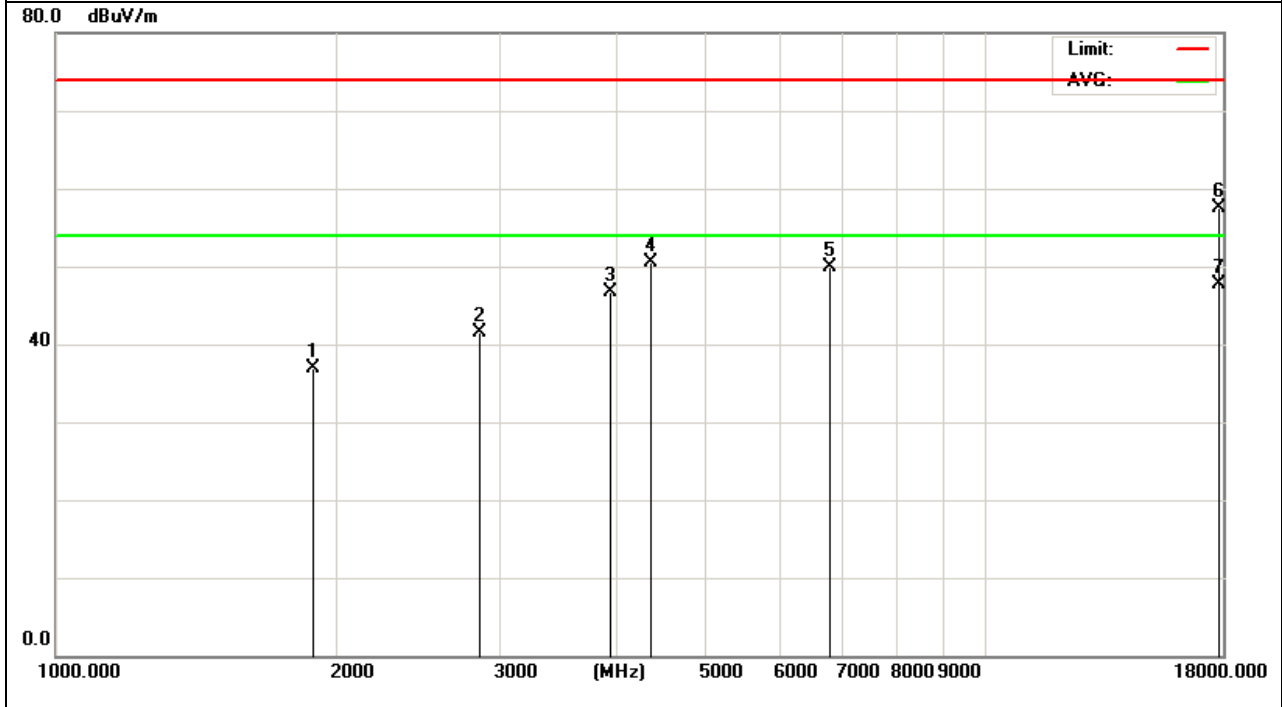

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 106	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
dBuV	dB	dBuV/m	dBuV/m	dB	Detector	peak
1756.995	46.17	-9.46	36.71	74.00	-37.29	peak
3019.441	42.37	-1.63	40.74	74.00	-33.26	peak
4366.328	41.90	4.46	46.36	74.00	-27.64	peak
6856.132	43.41	6.09	49.50	74.00	-24.50	peak
8022.348	41.61	10.41	52.02	74.00	-21.98	peak
17771.954	33.02	24.84	57.86	74.00	-16.14	peak
17771.954	22.64	24.84	47.48	54.00	-6.52	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

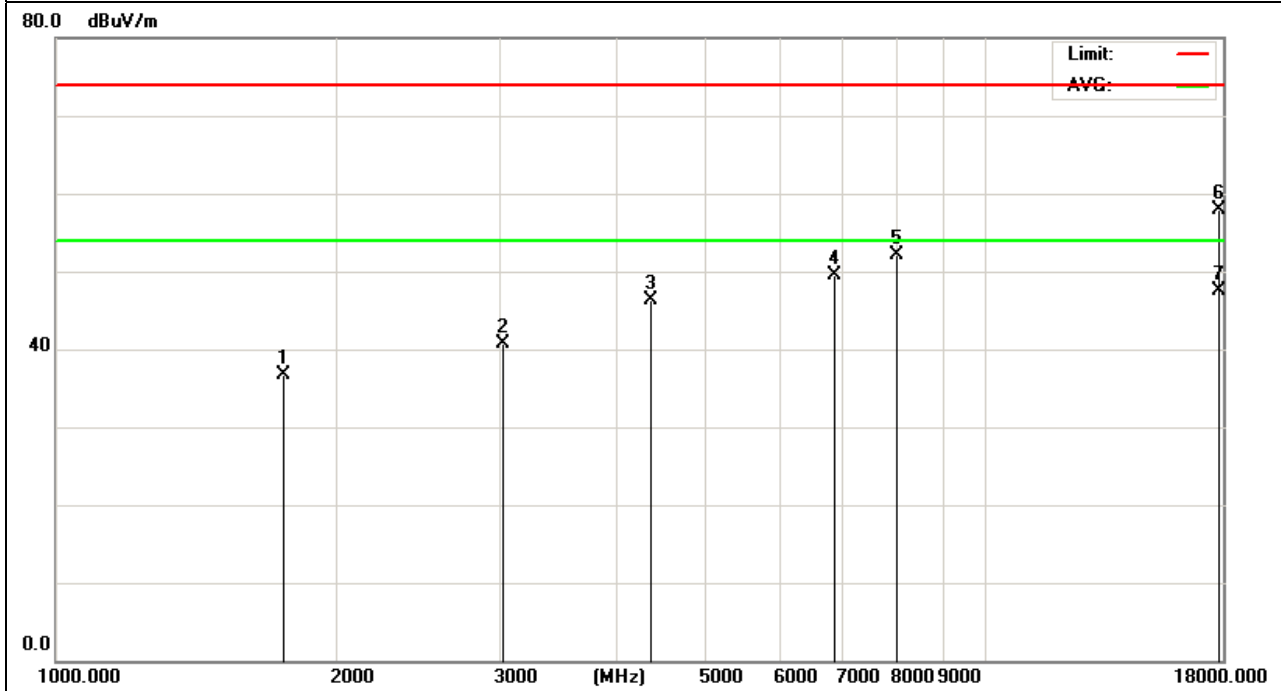

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 106	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19774.000	40.32	14.93	55.25	74.00	-18.75	peak
19774.000	30.21	14.93	45.14	54.00	-8.86	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

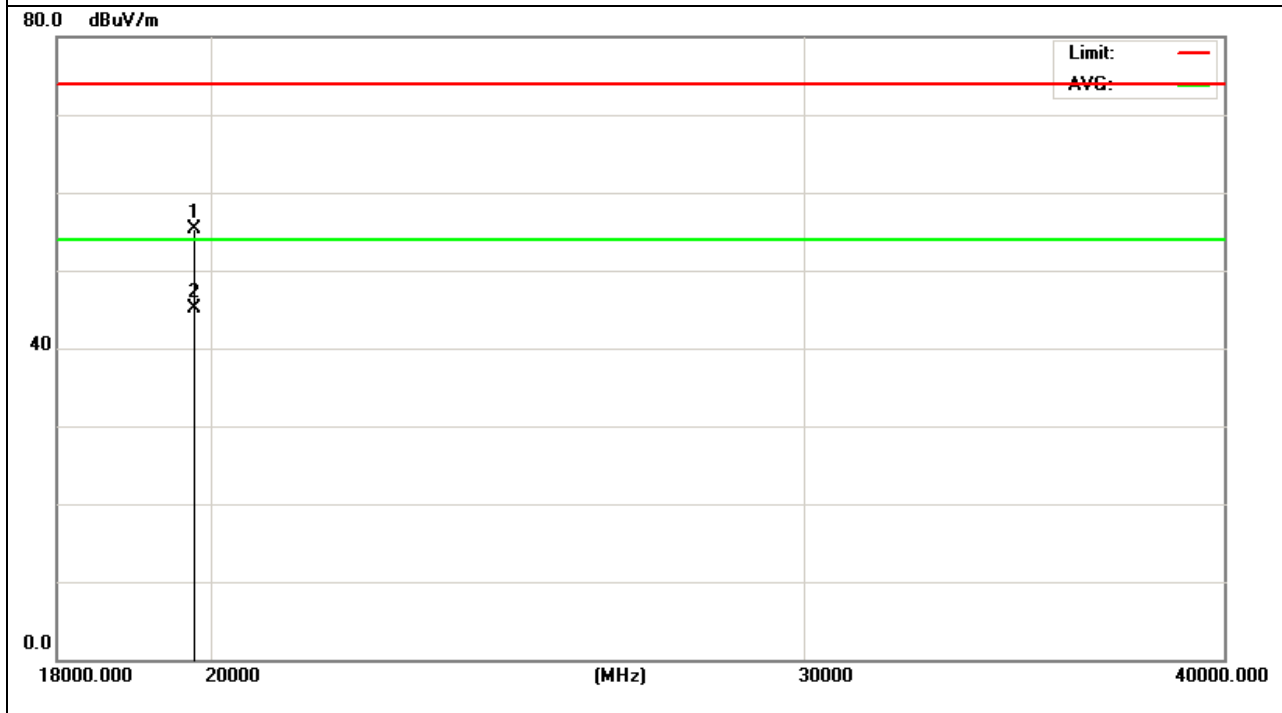

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 106	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19449.000	40.84	14.45	55.29	74.00	-18.71	peak
19449.000	29.99	14.45	44.44	54.00	-9.56	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

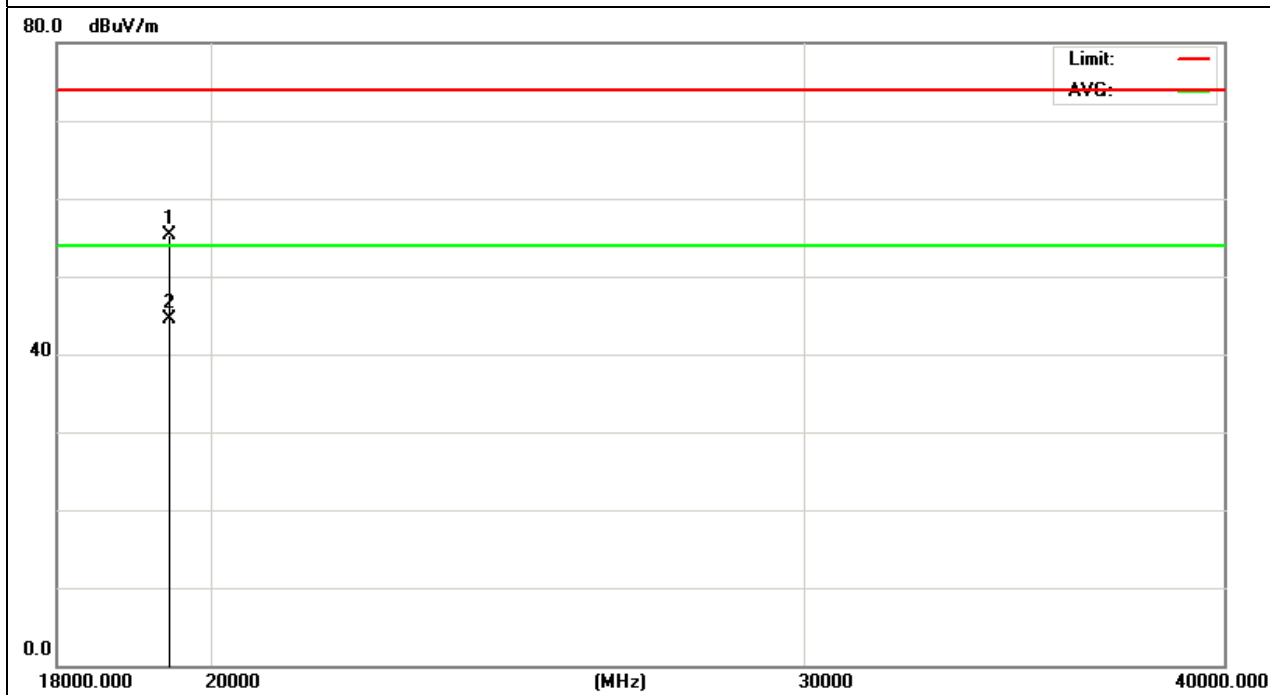

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 122	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1691.789	46.30	-9.66	36.64	74.00	-37.36	peak
2844.217	43.84	-2.64	41.20	74.00	-32.80	peak
3945.846	42.03	3.44	45.47	74.00	-28.53	peak
4365.887	44.85	4.46	49.31	74.00	-24.69	peak
6754.624	44.32	6.02	50.34	74.00	-23.66	peak
17830.235	32.89	24.79	57.68	74.00	-16.32	peak
17830.235	22.77	24.79	47.56	54.00	-6.44	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

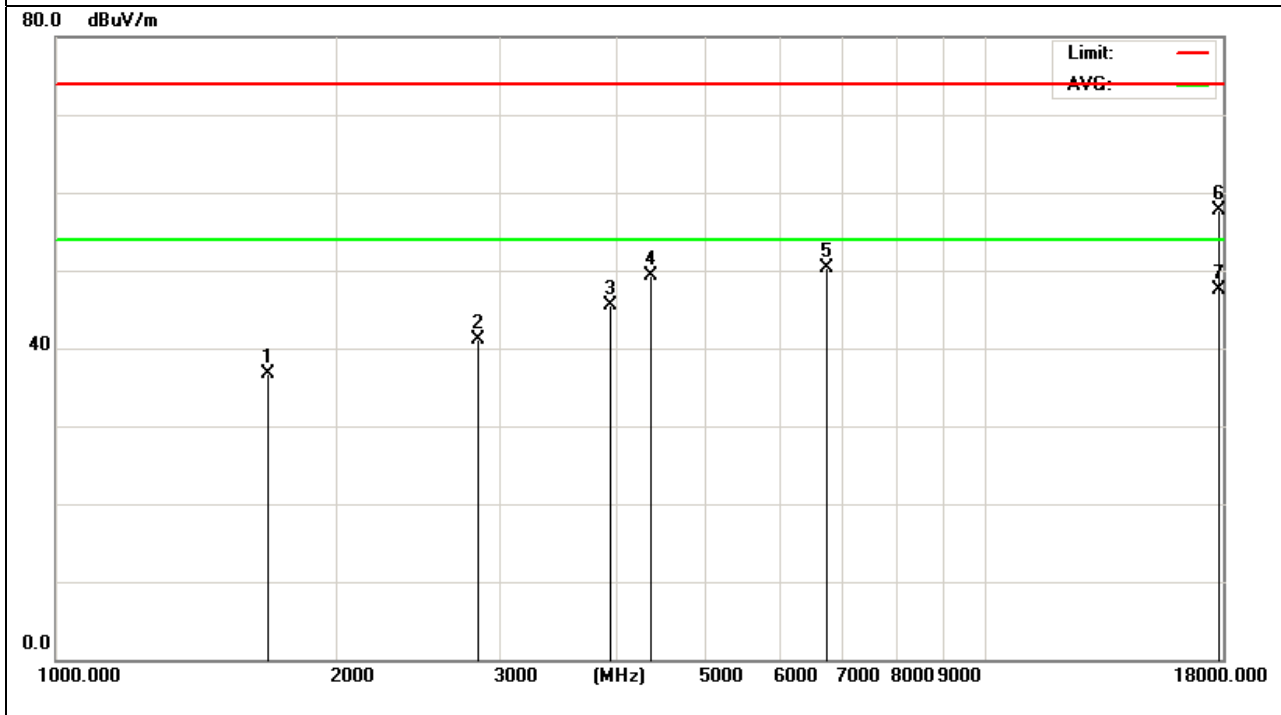

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 122	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1834.620	45.96	-9.41	36.55	74.00	-37.45	peak
3009.664	43.23	-1.65	41.58	74.00	-32.42	peak
4354.528	42.44	4.44	46.88	74.00	-27.12	peak
4846.471	43.65	5.11	48.76	74.00	-25.24	peak
8020.632	40.83	10.41	51.24	74.00	-22.76	peak
17645.089	33.77	24.93	58.70	74.00	-15.30	peak
17645.089	23.09	24.93	48.02	54.00	-5.98	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

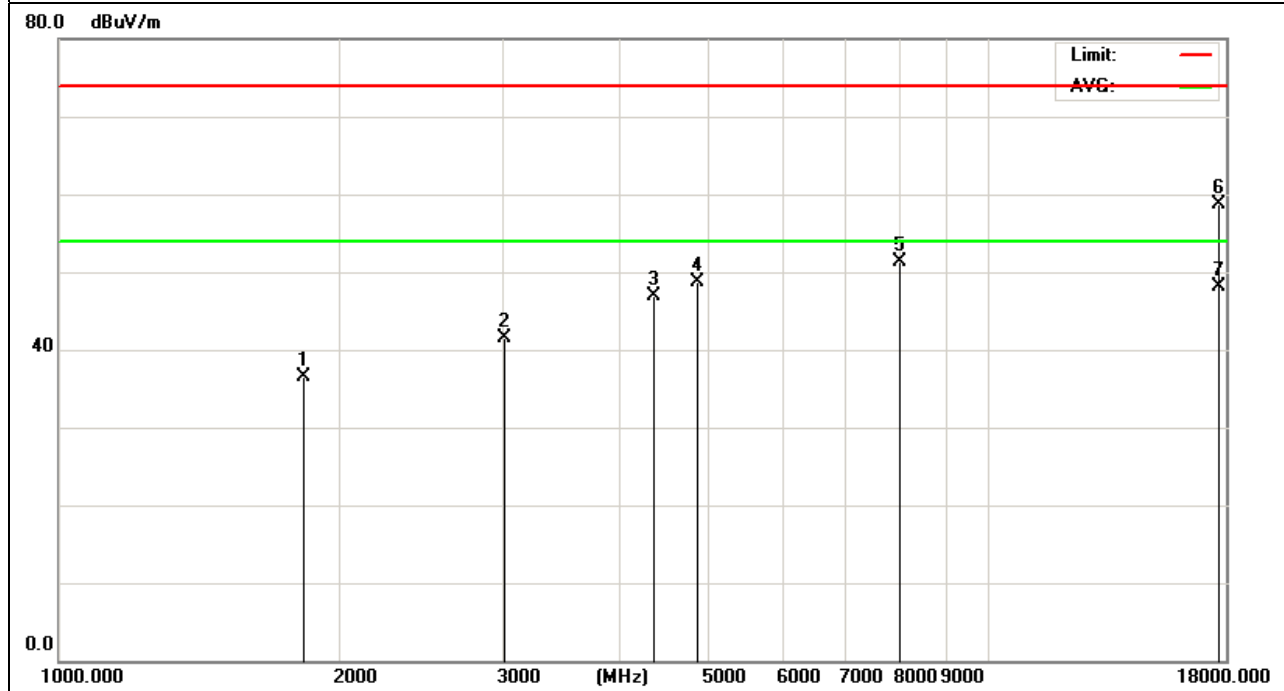

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 122	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
19533.000	40.65	14.58	55.23	74.00	-18.77	peak
19533.000	30.84	14.58	45.42	54.00	-8.58	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

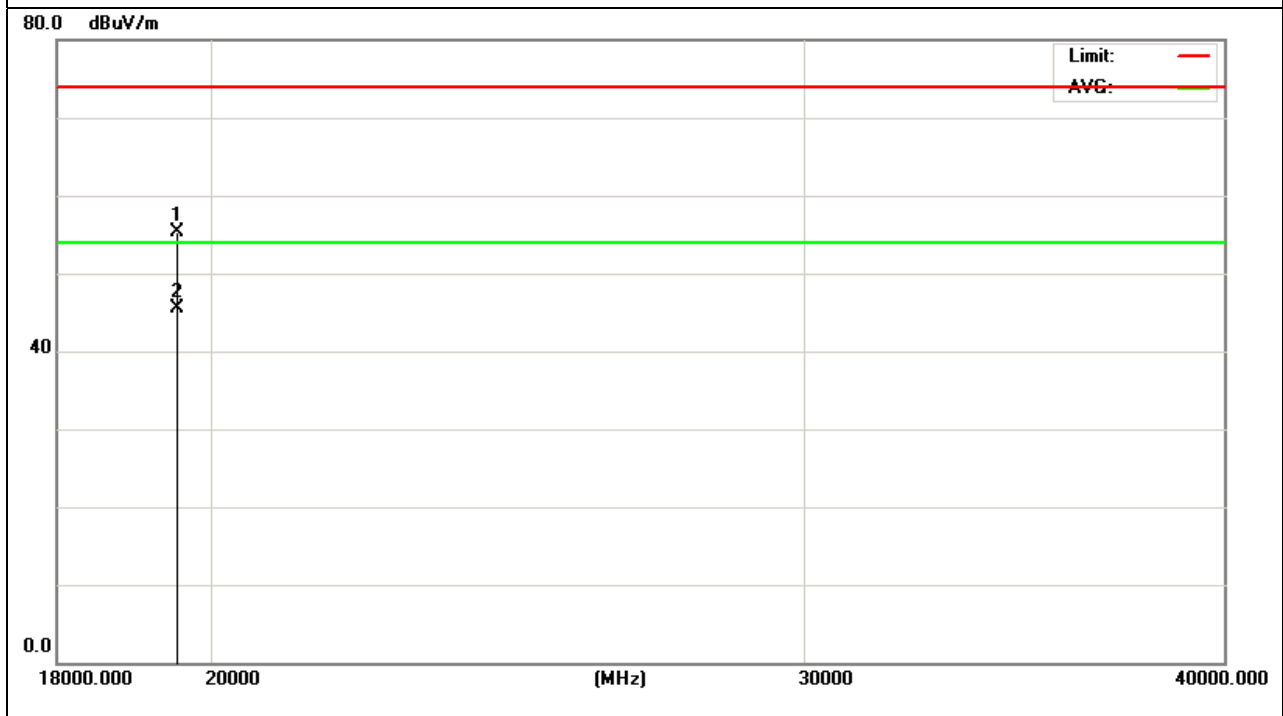

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	802.11ac80 Channel 122	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
18645.000	41.58	13.26	54.84	74.00	-19.16	peak
18645.000	31.62	13.26	44.88	54.00	-9.12	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

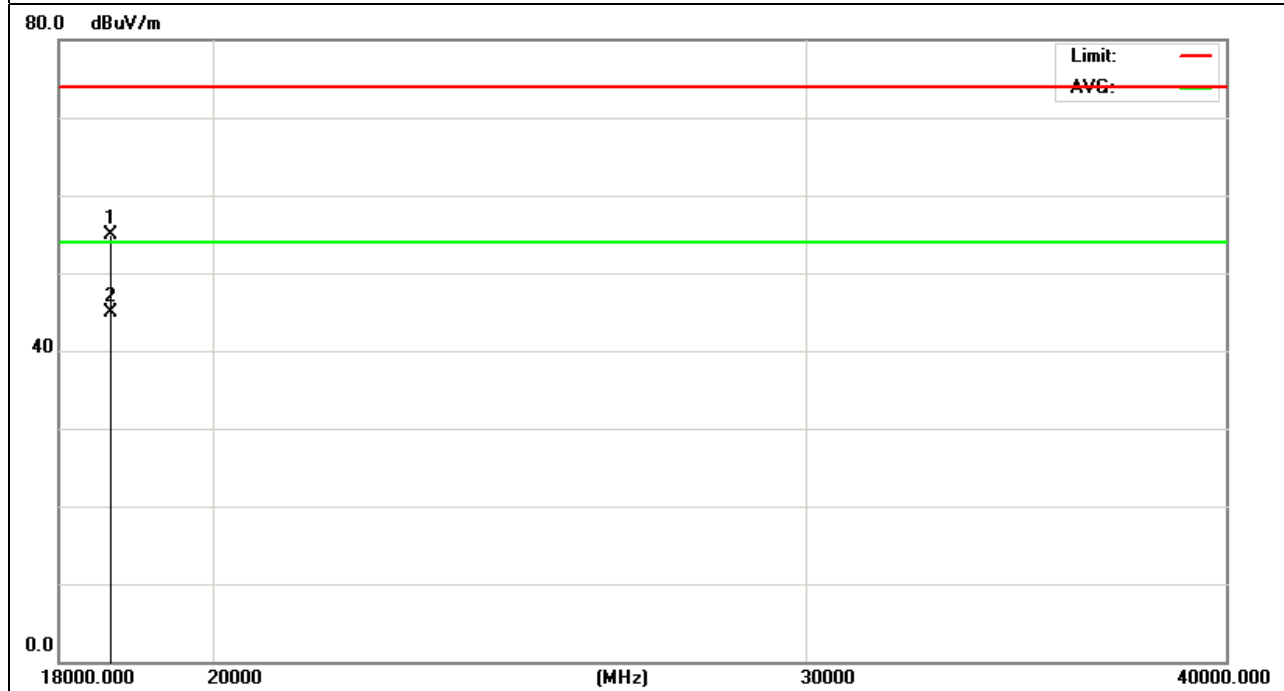

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	RX	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1755.843	45.89	-9.46	36.43	74.00	-37.57	peak
2850.945	44.69	-2.60	42.09	74.00	-31.91	peak
3950.612	43.24	3.47	46.71	74.00	-27.29	peak
4366.126	45.36	4.46	49.82	74.00	-24.18	peak
6765.984	44.25	6.02	50.27	74.00	-23.73	peak
17693.651	33.32	24.89	58.21	74.00	-15.79	peak
17693.651	22.22	24.89	47.11	54.00	-6.89	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

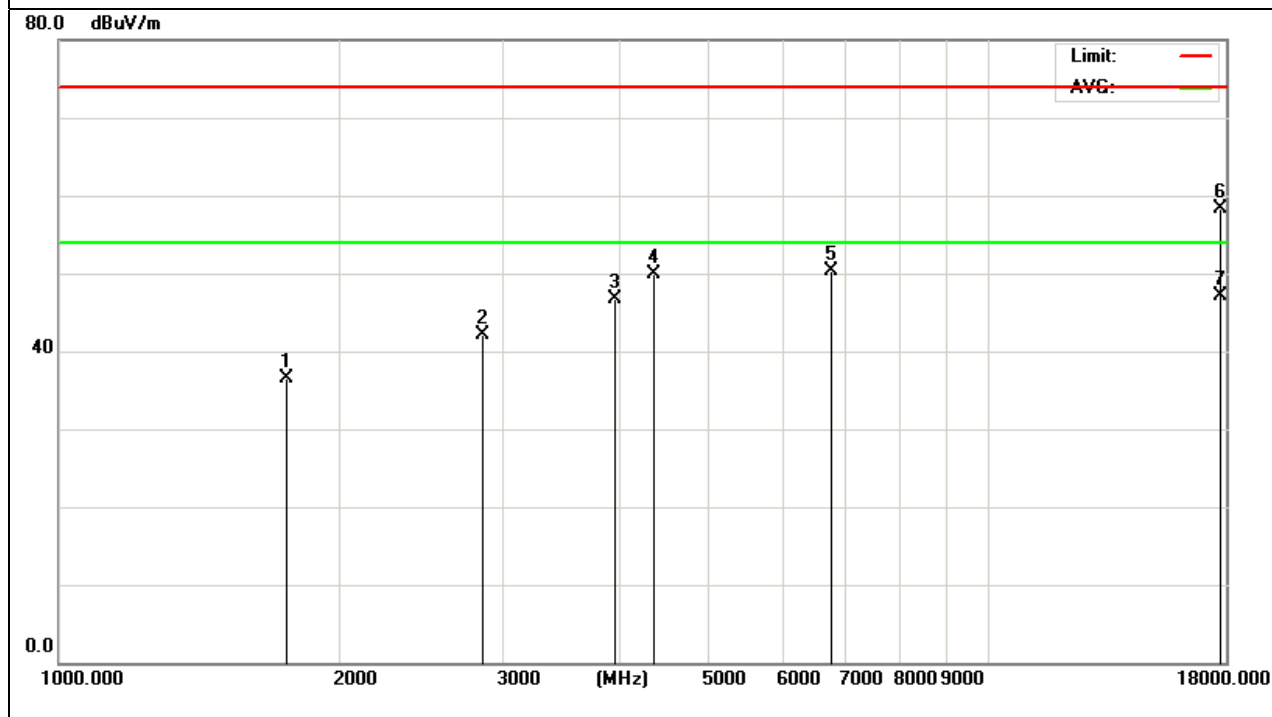

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	RX	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1668.956	45.73	-9.71	36.02	74.00	-37.98	peak
3022.489	42.82	-1.62	41.20	74.00	-32.80	peak
4366.774	44.08	4.46	48.54	74.00	-25.46	peak
4850.295	43.98	5.11	49.09	74.00	-24.91	peak
8020.461	41.65	10.41	52.06	74.00	-21.94	peak
17693.461	33.78	24.89	58.67	74.00	-15.33	peak
17693.461	23.03	24.89	47.92	54.00	-6.08	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

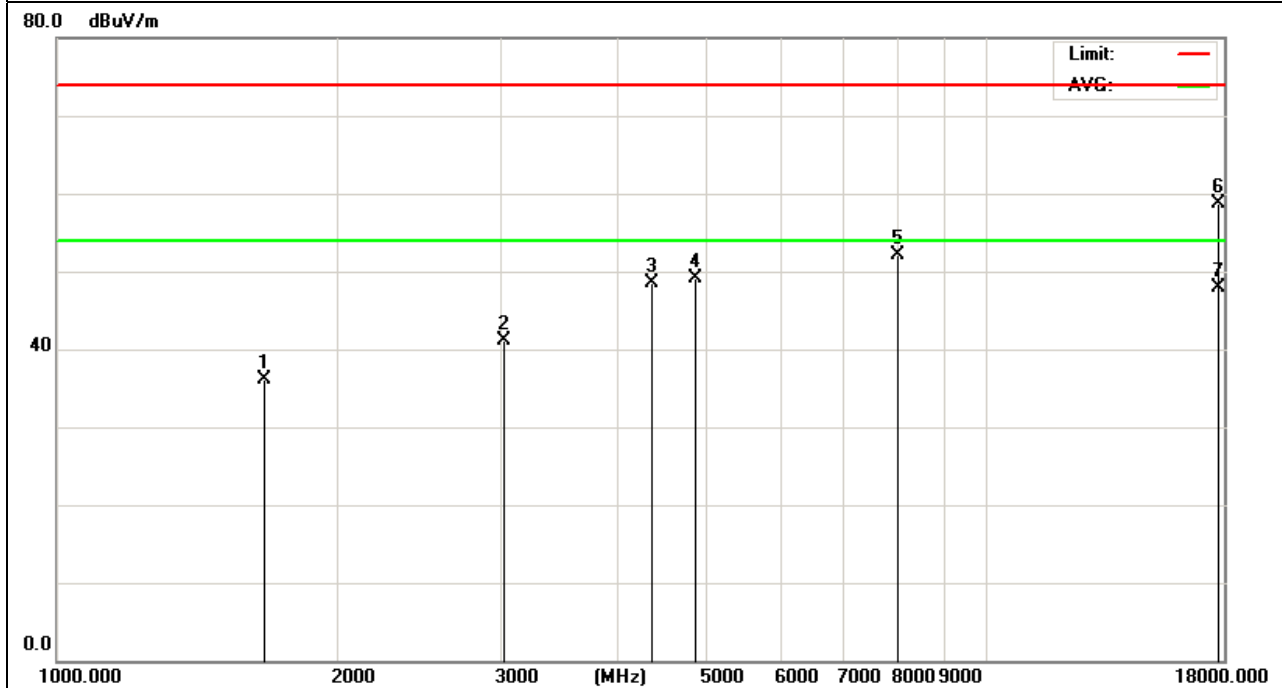

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	RX	Polarization :	Horizontal
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20469.000	39.84	15.96	55.80	74.00	-18.20	peak
20469.000	30.09	15.96	46.05	54.00	-7.95	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

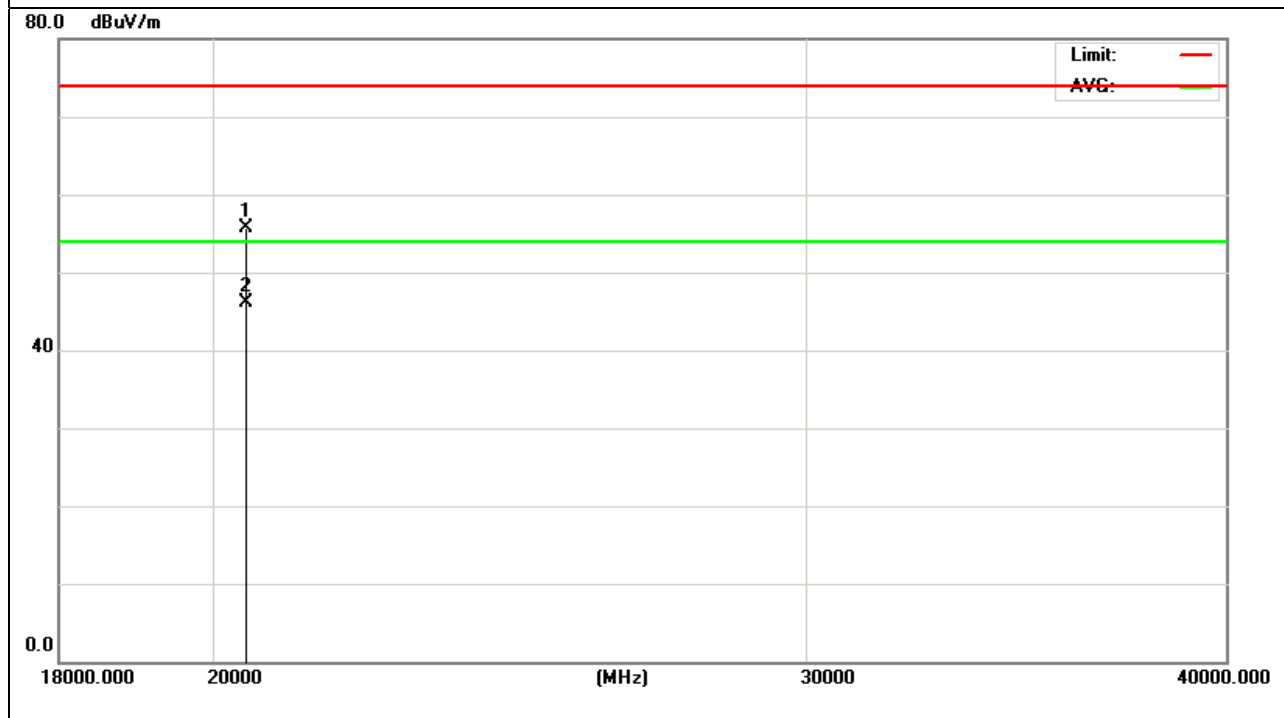

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2020-03-12
Test Mode :	RX	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 40GHz
Test Power :	DC12V from adapter		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
20441.000	39.85	15.92	55.77	74.00	-18.23	peak
20441.000	29.76	15.92	45.68	54.00	-8.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

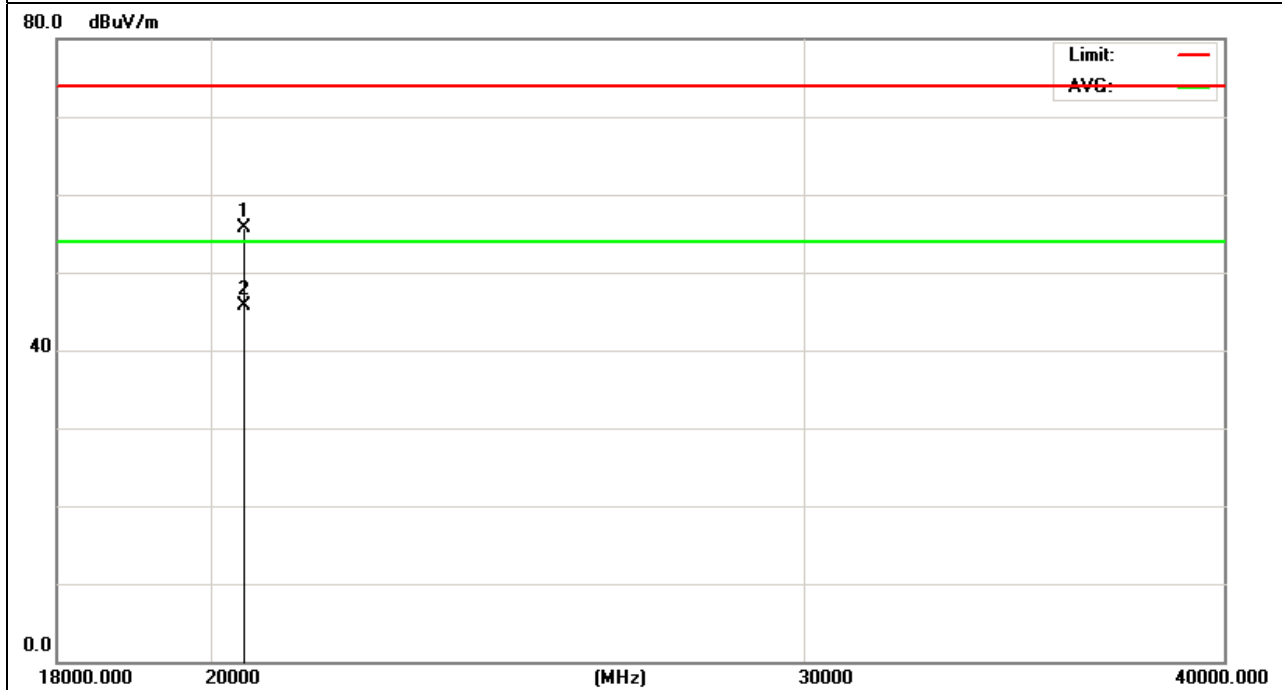

No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.

3.2.6 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11a		
Test Date :	2020-03-12		
Note :	1. The transmitter was setup to transmit at the lowest channel (CH36). Then the field strength was measured at 4500-5150 MHz. 2. The transmitter was setup to transmit at the highest channel (CH48). Then the field strength was measured at 5350-5460 MHz. 3. The data of 5150MHz and 5350MHz was the worst.		



Freq. (MHz) (Peak)	Freq. (MHz) (AV)	Ant.Pol. H/V	Reading		Ant/CF		Act		Limit		Note
			Peak (dBuv)	AV (dBuv)	Peak (dB)	AV (dB)	Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
5150.000	5150.000	V	44.89	33.96	4.78	4.78	49.67	38.74	74.00	54.00	CH36
5178.760	5179.760	V	90.63	79.68	4.69	4.69	---	---	---	---	CH36
5150.000	5150.000	H	45.87	34.59	4.78	4.78	50.65	39.37	74.00	54.00	CH36
5178.760	5179.720	H	92.46	84.97	4.69	4.69	---	---	---	---	CH36
5318.400	5319.150	V	91.87	81.36	4.37	4.37	---	---	---	---	CH48
5350.000	5350.000	V	46.38	37.02	4.30	4.30	50.68	41.32	74.00	54.00	CH48
5318.700	5319.000	H	95.11	35.96	4.37	4.37	---	---	---	---	CH48
5350.000	5350.000	H	47.96	36.87	4.30	4.30	52.26	41.17	74.00	54.00	CH48

Remark



- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.



802.11a (5.15GHz-5.25GHz)
CH 36 (Lower) Data rate 6Mbps

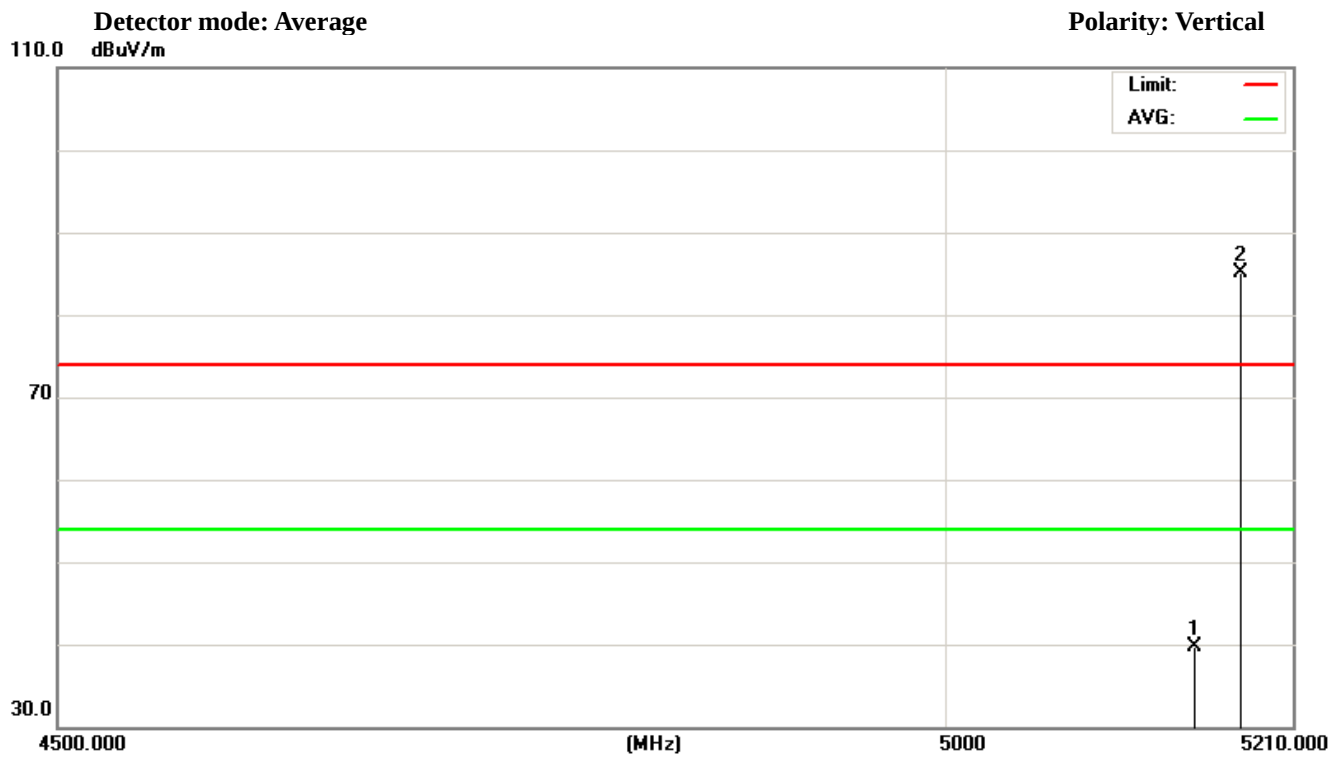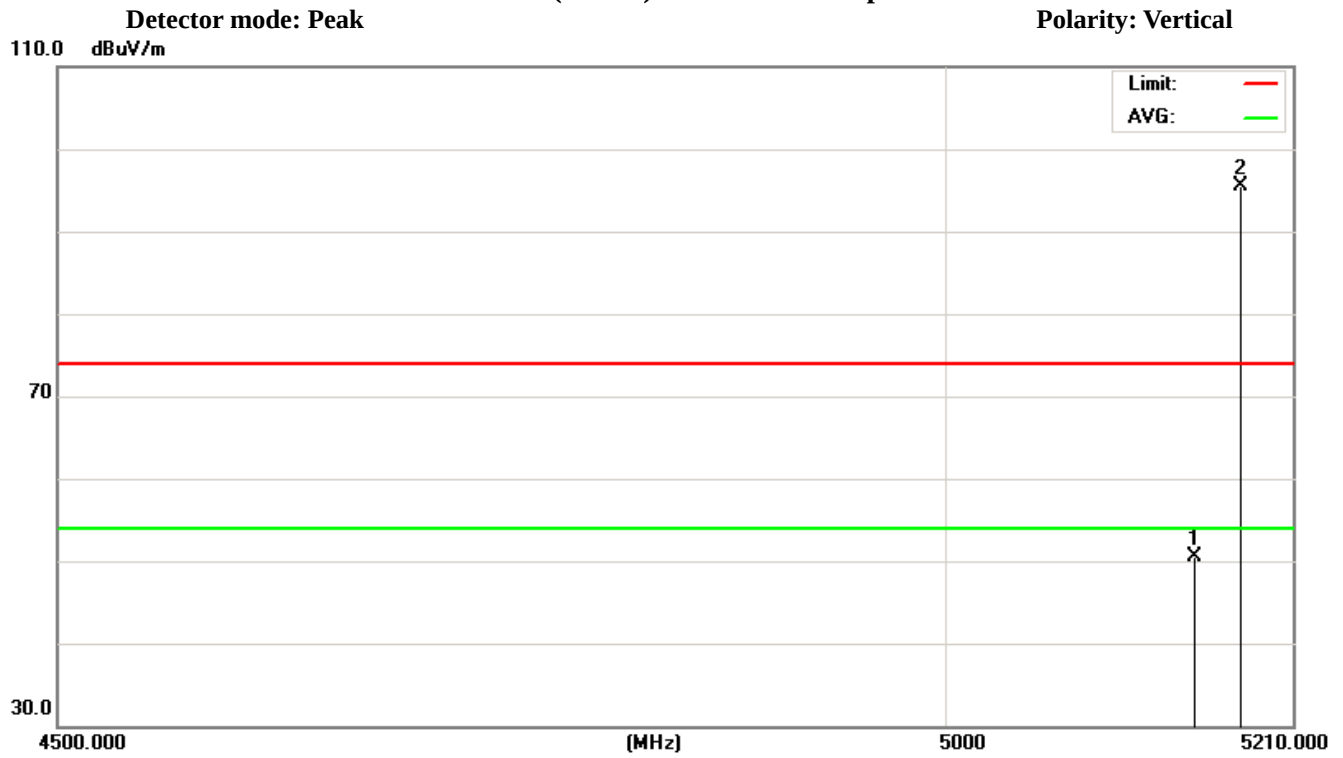

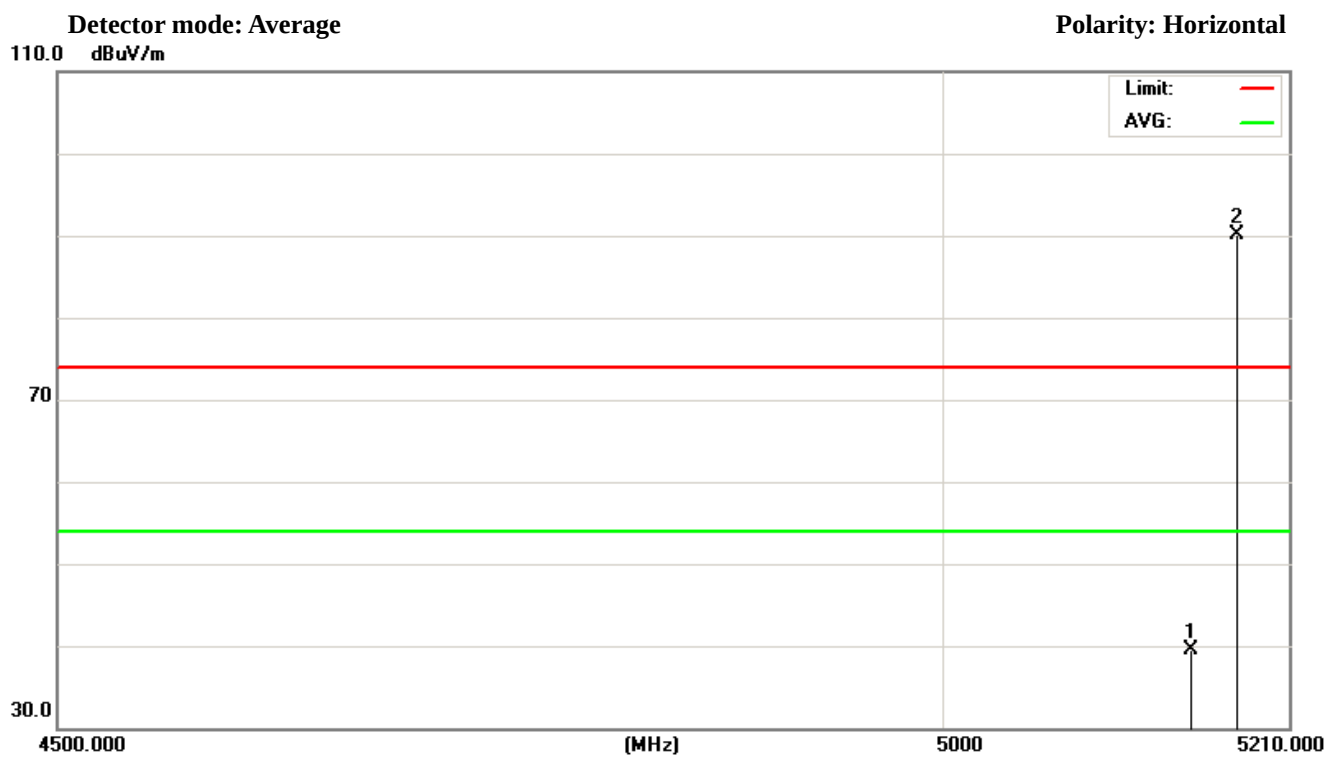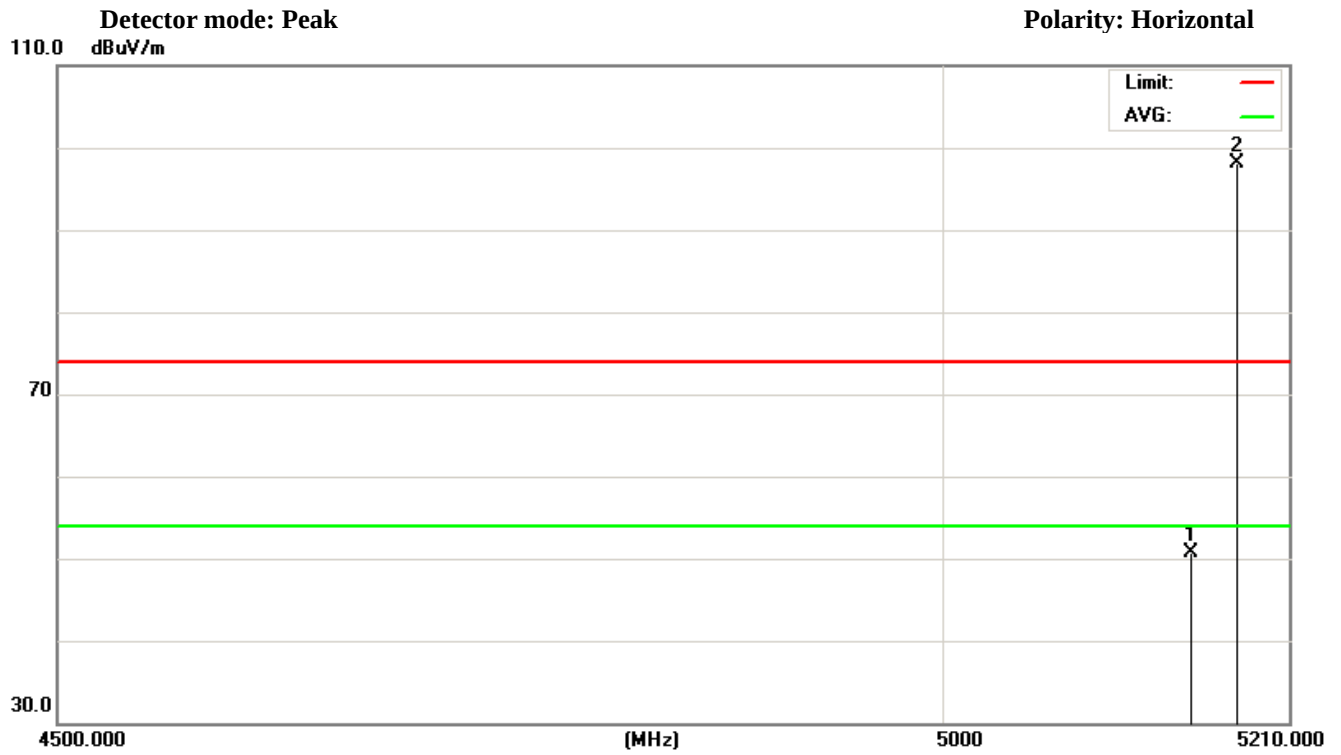

802.11a (5.15GHz-5.25GHz) CH 48 (Upper) Data rate 6Mbps

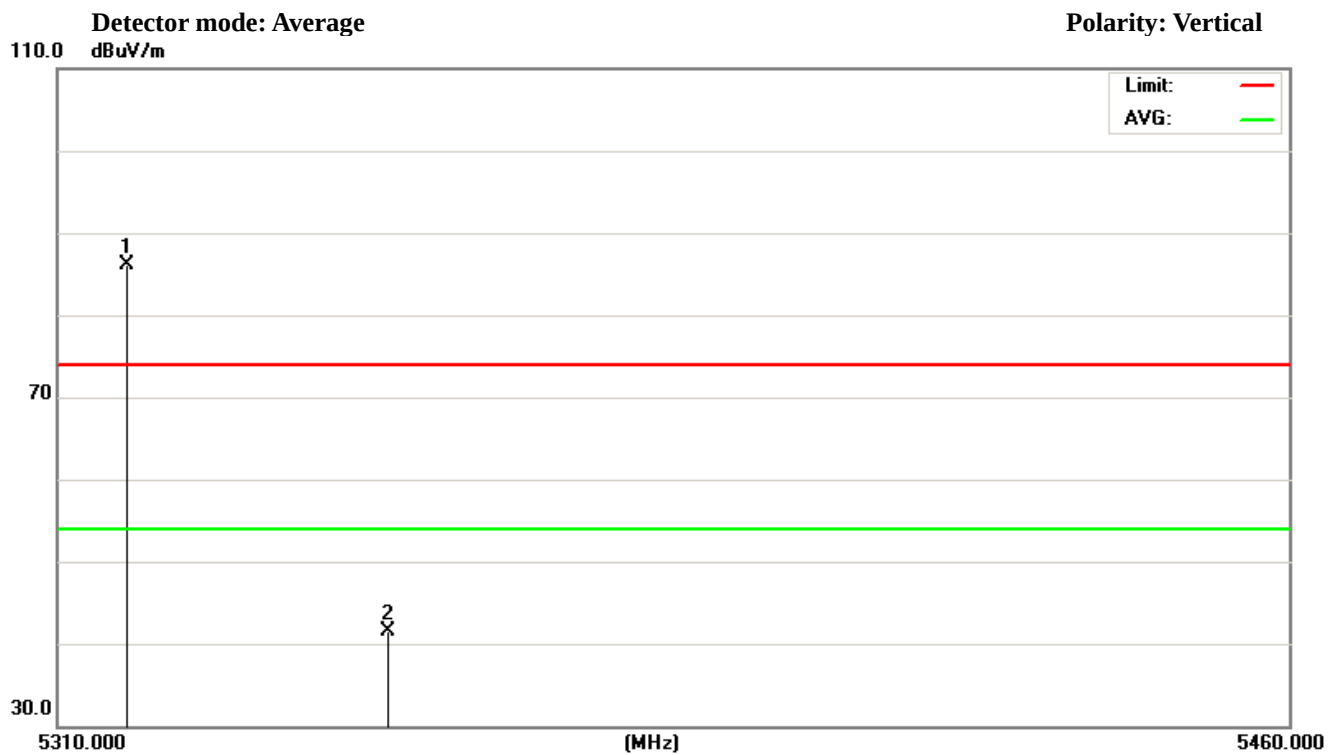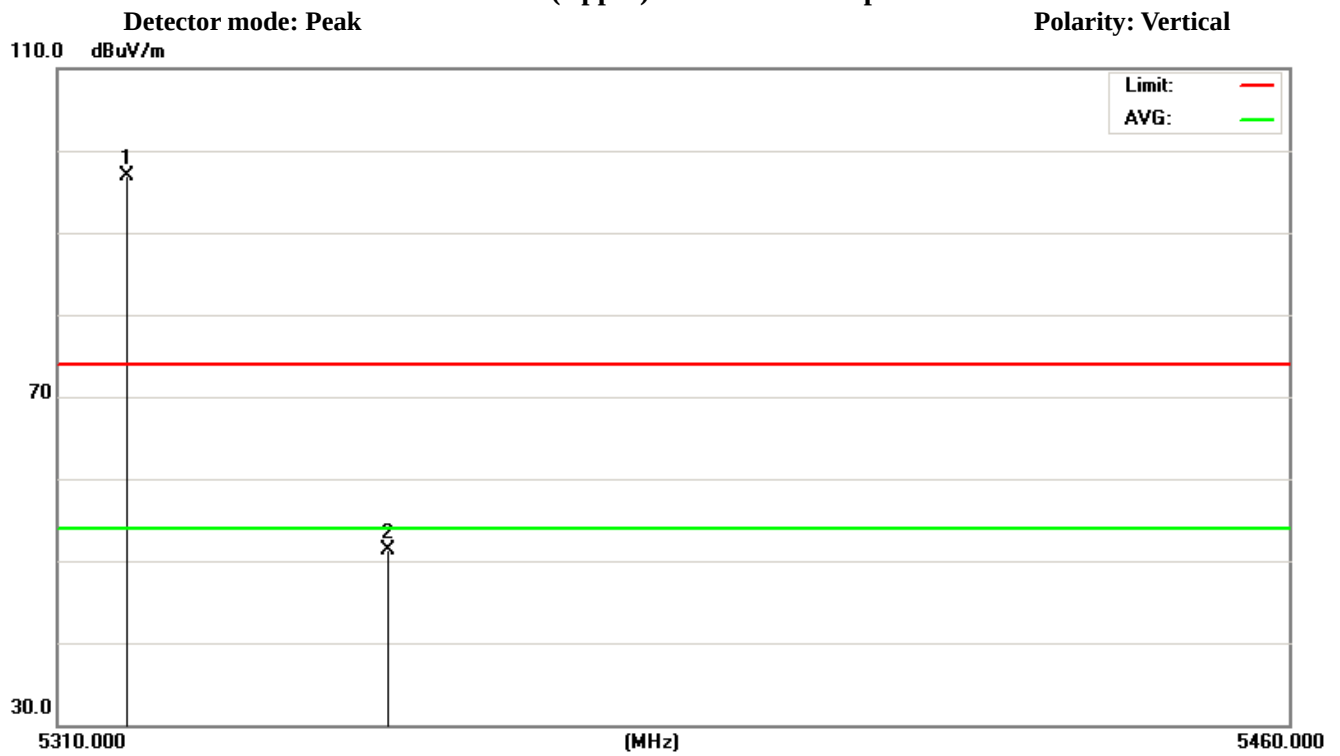

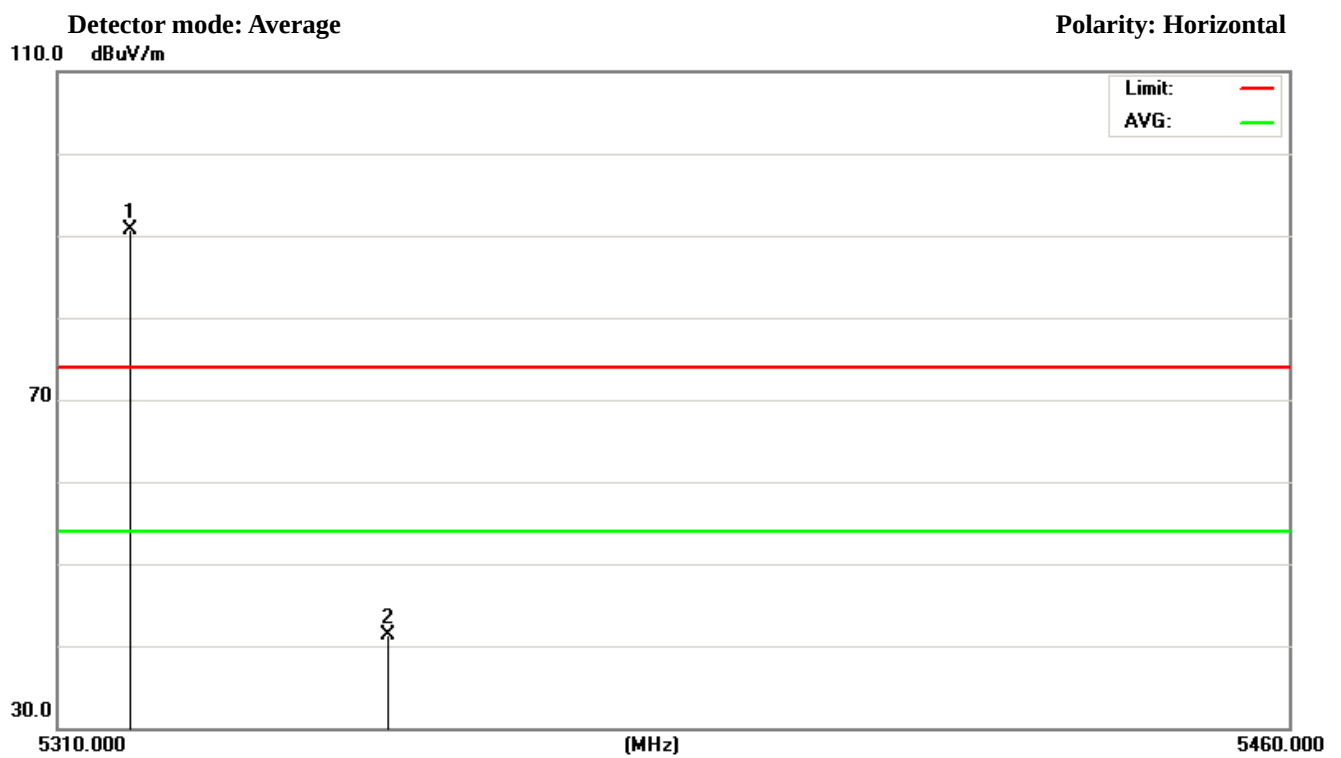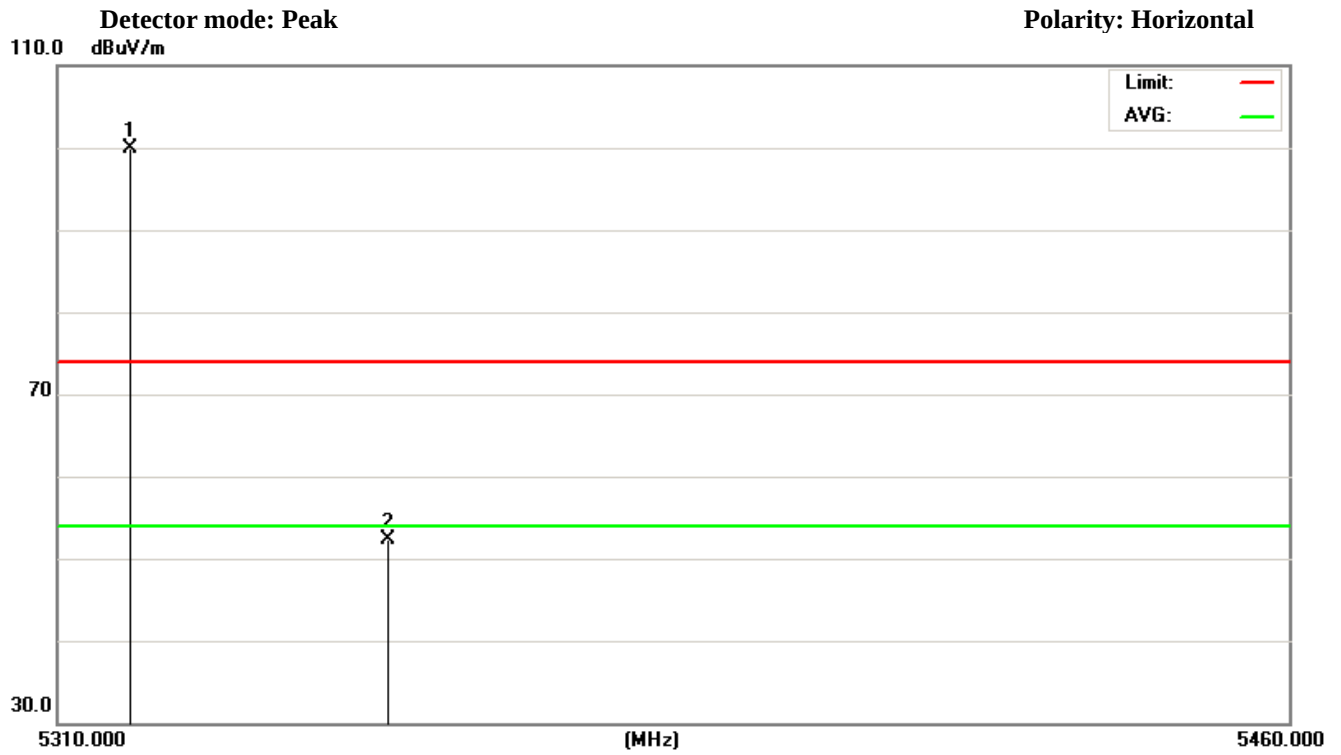



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11n BW20MHz		
Test Date :	2020-03-12		
Note :	1. The transmitter was setup to transmit at the lowest channel (CH36). Then the field strength was measured at 4500-5150 MHz. 2. The transmitter was setup to transmit at the highest channel (CH48). Then the field strength was measured at 5350-5460 MHz. 3. The data of 5150MHz and 5350MHz was the worst.		



Freq. (MHz) (Peak)	Freq. (MHz) (AV)	Ant.Pol. H/V	Reading		Ant/CF		Act		Limit		Note
			Peak (dBuv)	AV (dBuv)	Peak (dB)	AV (dB)	Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
5150.000	5150.000	V	45.61	36.19	4.78	4.78	50.39	40.97	74.00	54.00	CH36
5178.750	5179.000	V	90.28	79.62	4.69	4.69	---	---	---	---	CH36
5150.000	5150.000	H	45.97	35.17	4.78	4.78	50.75	39.95	74.00	54.00	CH36
5181.600	5178.760	H	94.66	83.35	4.69	4.69	---	---	---	---	CH36
5320.800	5319.300	V	92.25	81.91	4.37	4.37	---	---	---	---	CH48
5350.000	5350.000	V	47.31	37.16	4.30	4.30	51.61	41.46	74.00	54.00	CH48
5319.000	5321.250	H	95.89	84.33	4.37	4.37	---	---	---	---	CH48
5350.000	5350.000	H	47.96	37.29	4.30	4.30	52.26	41.59	74.00	54.00	CH48

Remark



- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.



802.11n(20M) (5.15GHz-5.25GHz)
CH 36 (Lower) Data rate 7.2Mbps

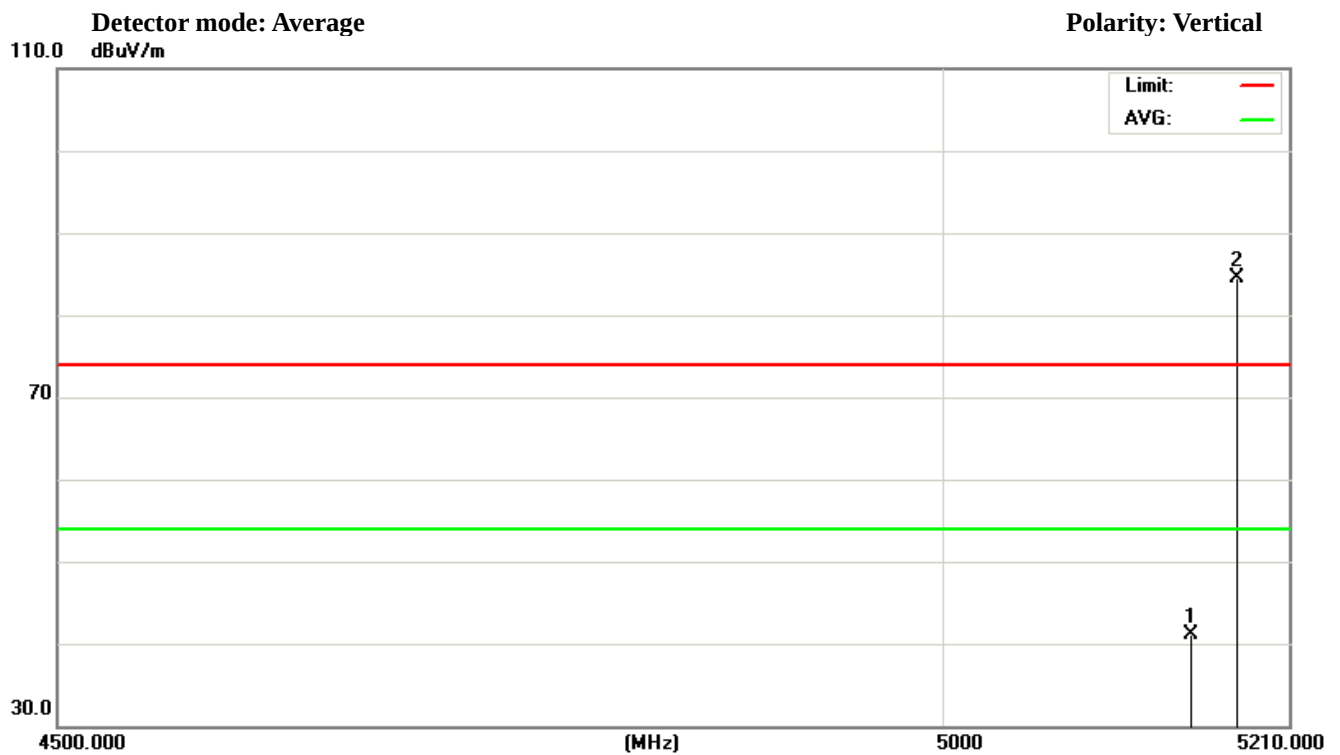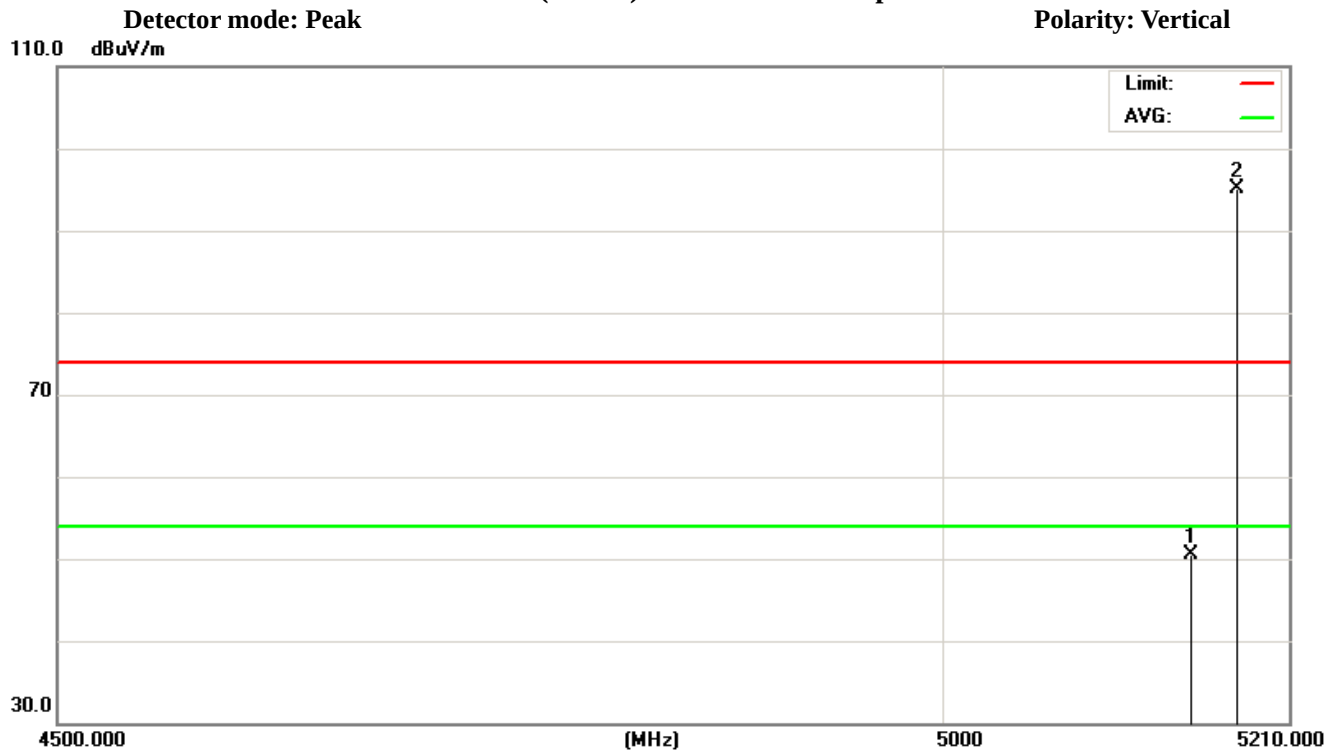

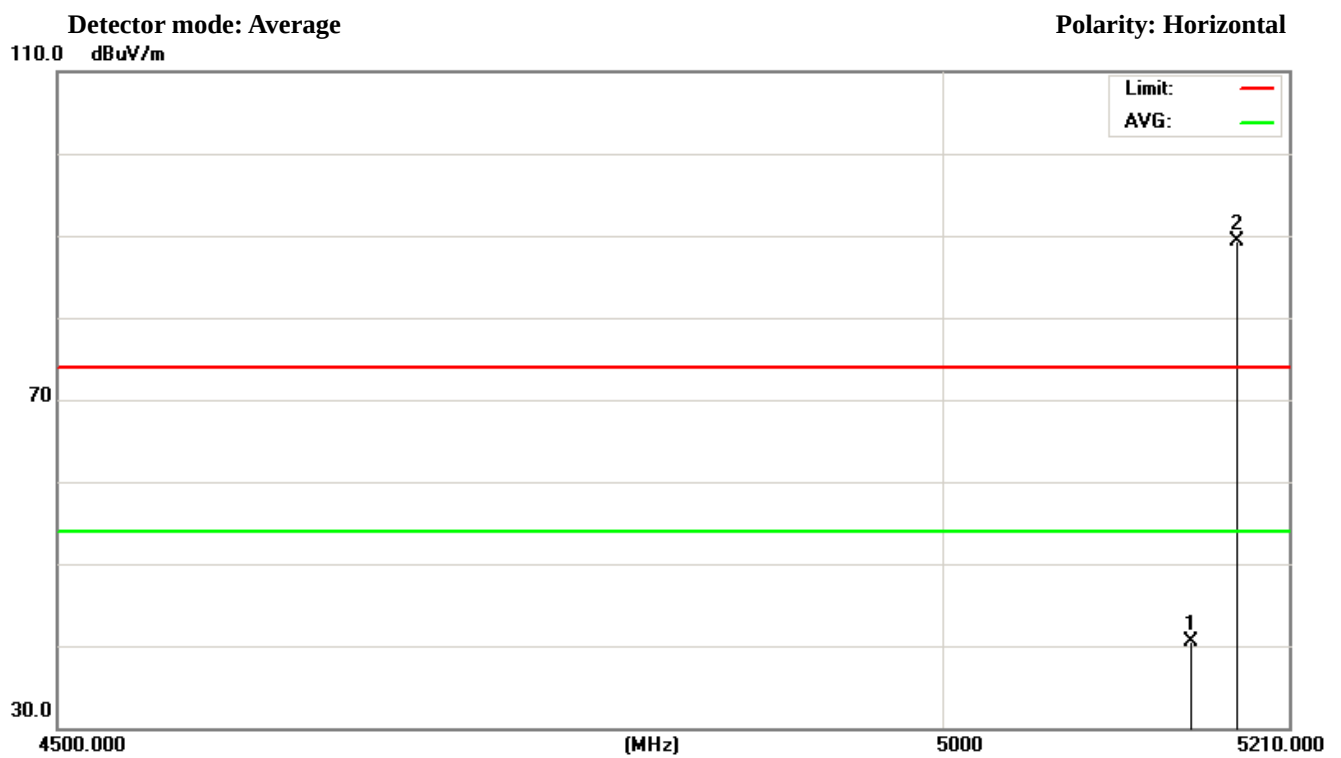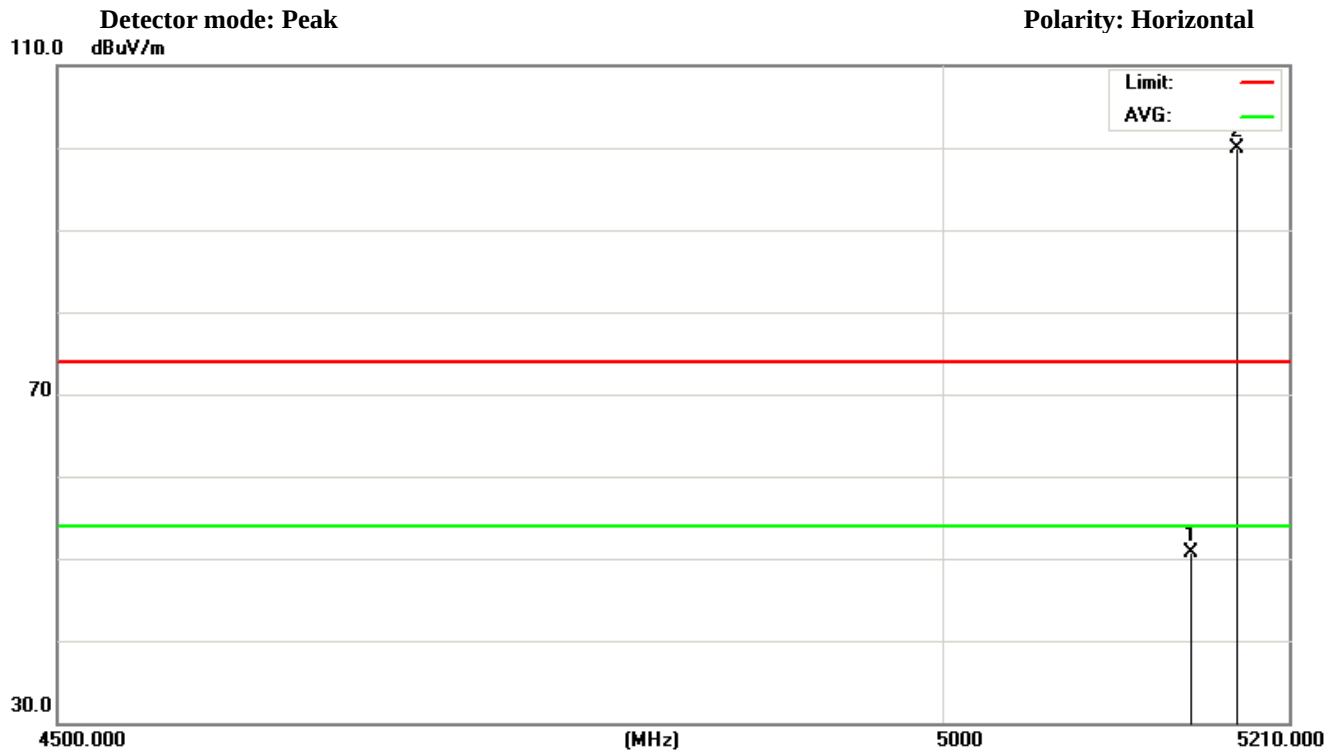

802.11n(20M) (5.15GHz-5.25GHz)
CH 48 (Upper) Data rate 7.2Mbps

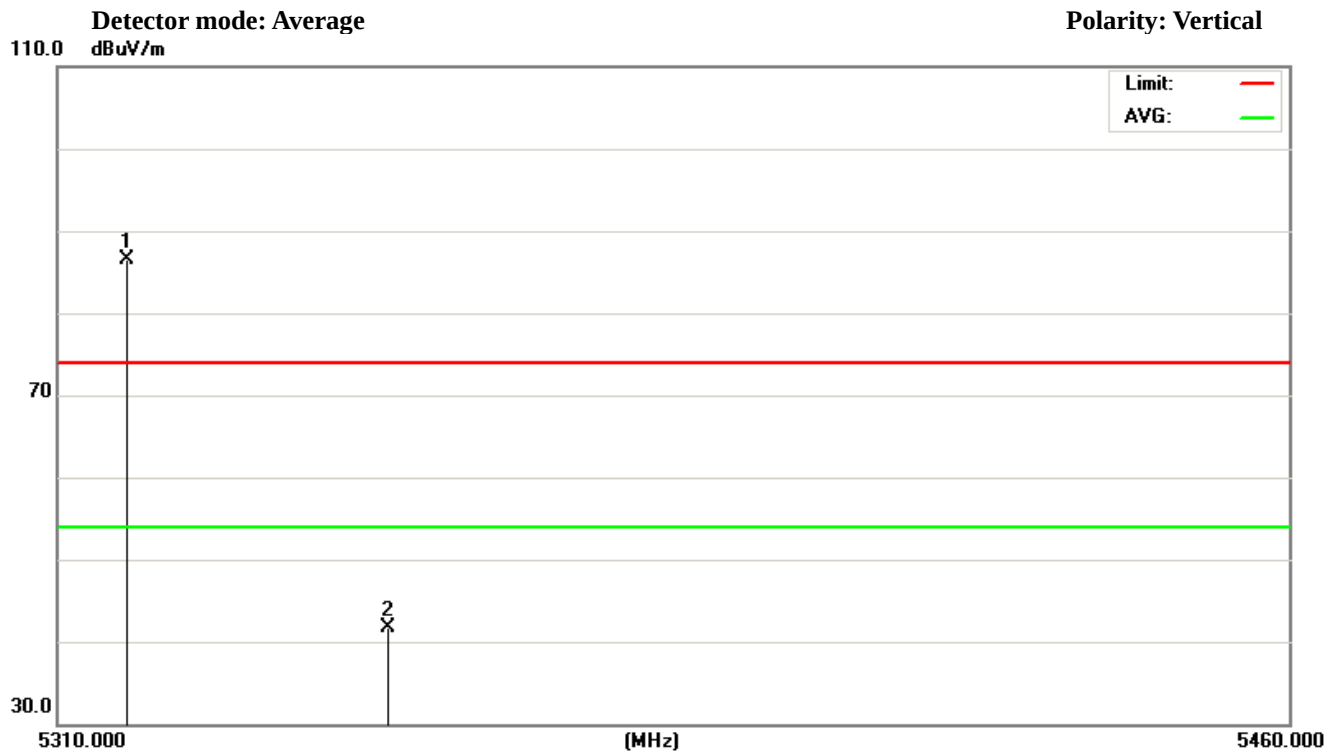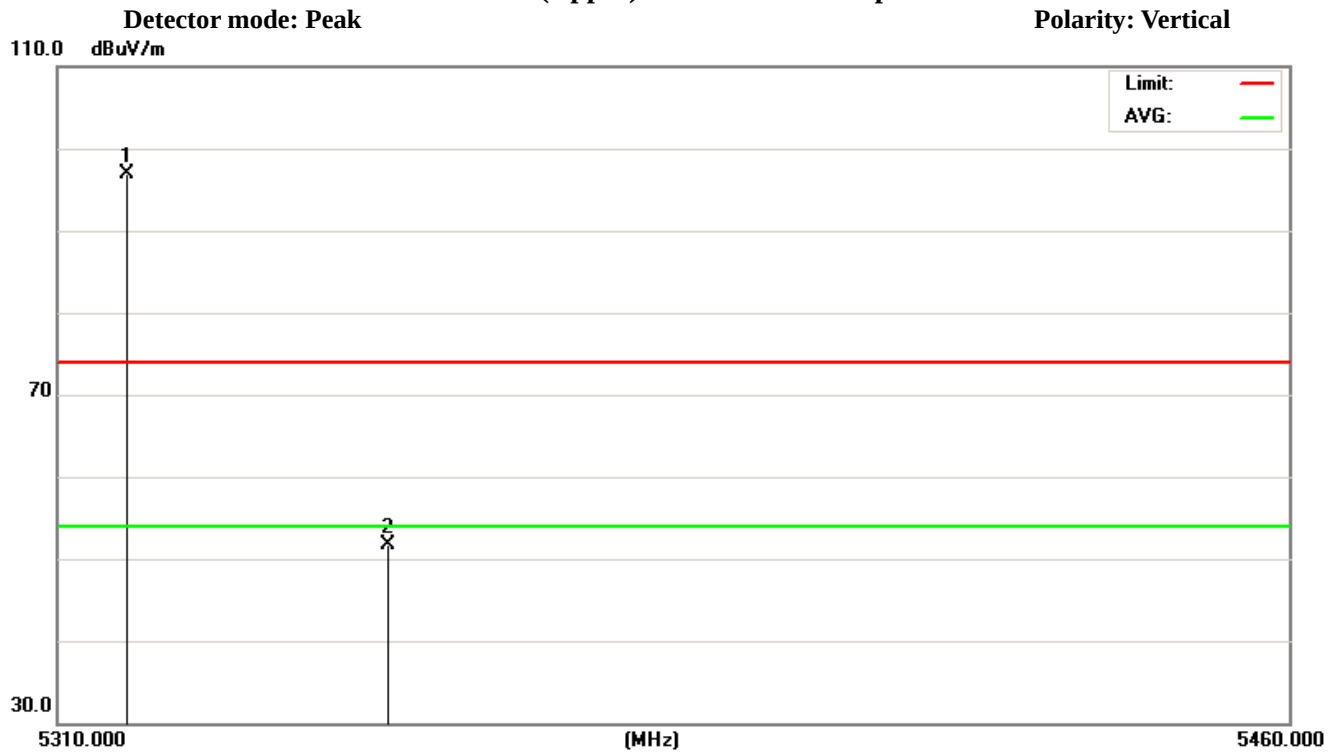

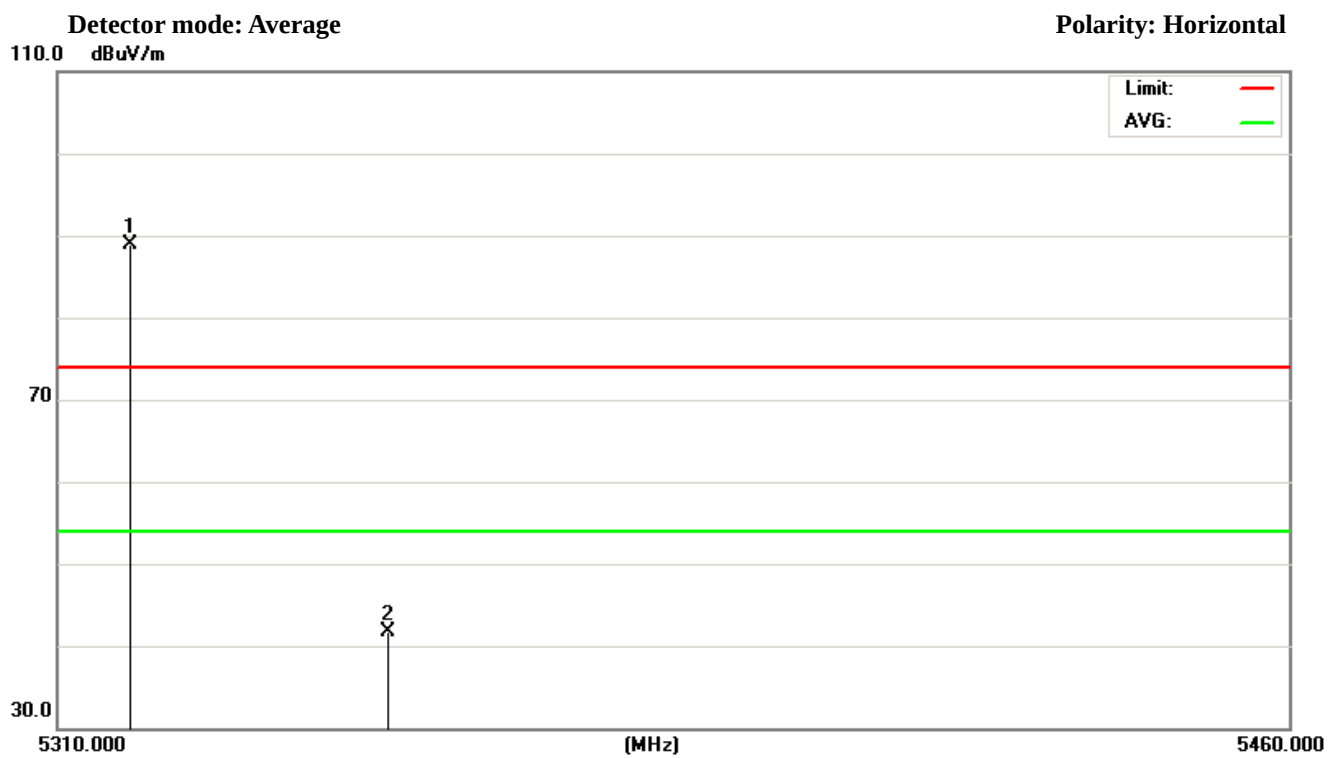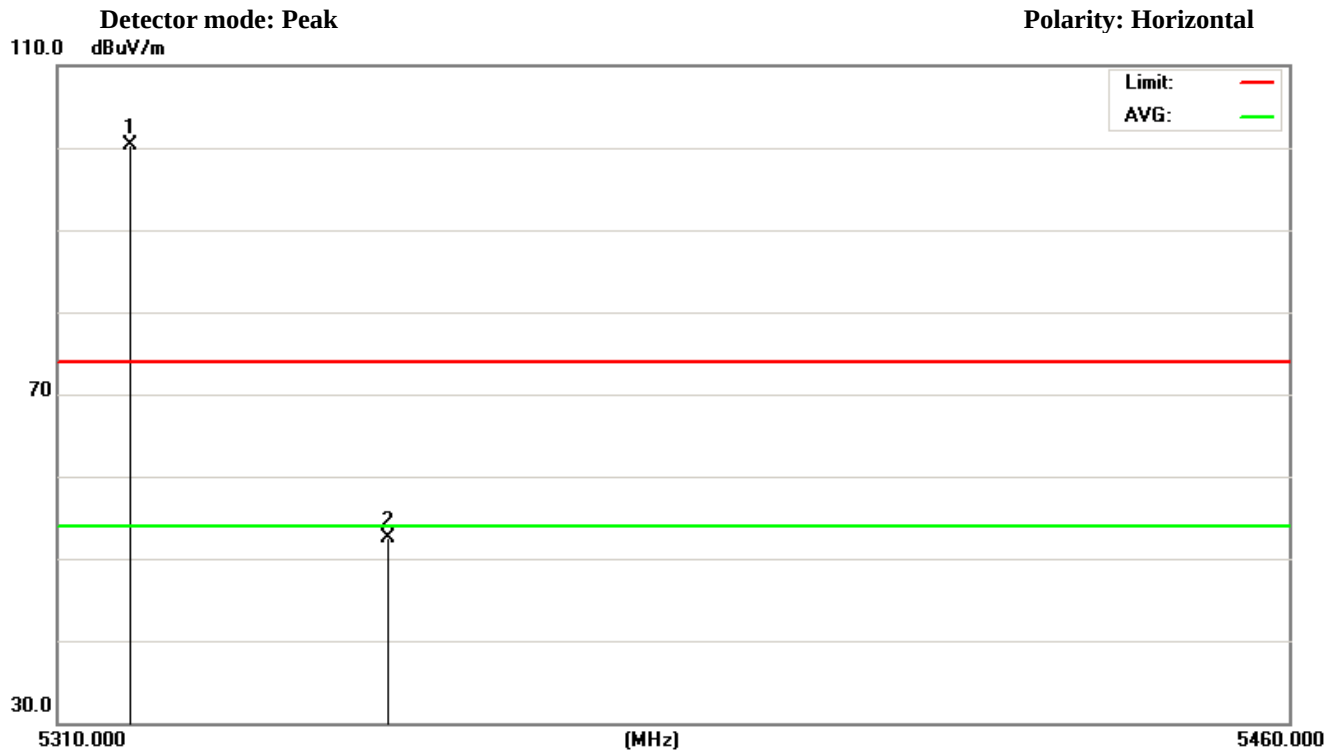



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11n BW40MHz		
Test Date :	2020-03-12		
Note :	1. The transmitter was setup to transmit at the lowest channel (CH38). Then the field strength was measured at 4500-5150 MHz. 2. The transmitter was setup to transmit at the highest channel (CH46). Then the field strength was measured at 5350-5460 MHz. 3. The data of 5150MHz and 5350MHz was the worst.		



Freq. (MHz) (Peak)	Freq. (MHz) (AV)	Ant.Pol. H/V	Reading		Ant/CF		Act		Limit		Note
			Peak (dBuv)	AV (dBuv)	Peak (dB)	AV (dB)	Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
5150.000	5150.000	V	51.96	41.79	4.78	4.78	56.74	46.57	74.00	54.00	CH38
5192.430	5192.410	V	87.93	78.15	4.66	4.66	---	---	---	---	CH38
5150.000	5150.000	H	53.49	43.58	4.78	4.78	58.27	48.36	74.00	54.00	CH38
5192.960	5192.280	H	91.76	82.56	4.65	4.65	---	---	---	---	CH38
5292.890	5293.475	V	83.01	73.22	4.42	4.42	---	---	---	---	CH46
5350.000	5350.000	V	47.23	34.87	4.30	4.30	51.53	39.17	74.00	54.00	CH46
5293.060	5294.167	H	84.92	74.35	4.42	4.42	---	---	---	---	CH46
5350.000	5350.000	H	48.09	37.16	4.30	4.30	52.39	41.46	74.00	54.00	CH46

Remark



- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.



802.11n(40M) (5.15GHz-5.25GHz) CH 38 (Lower) Data rate 7.2Mbps

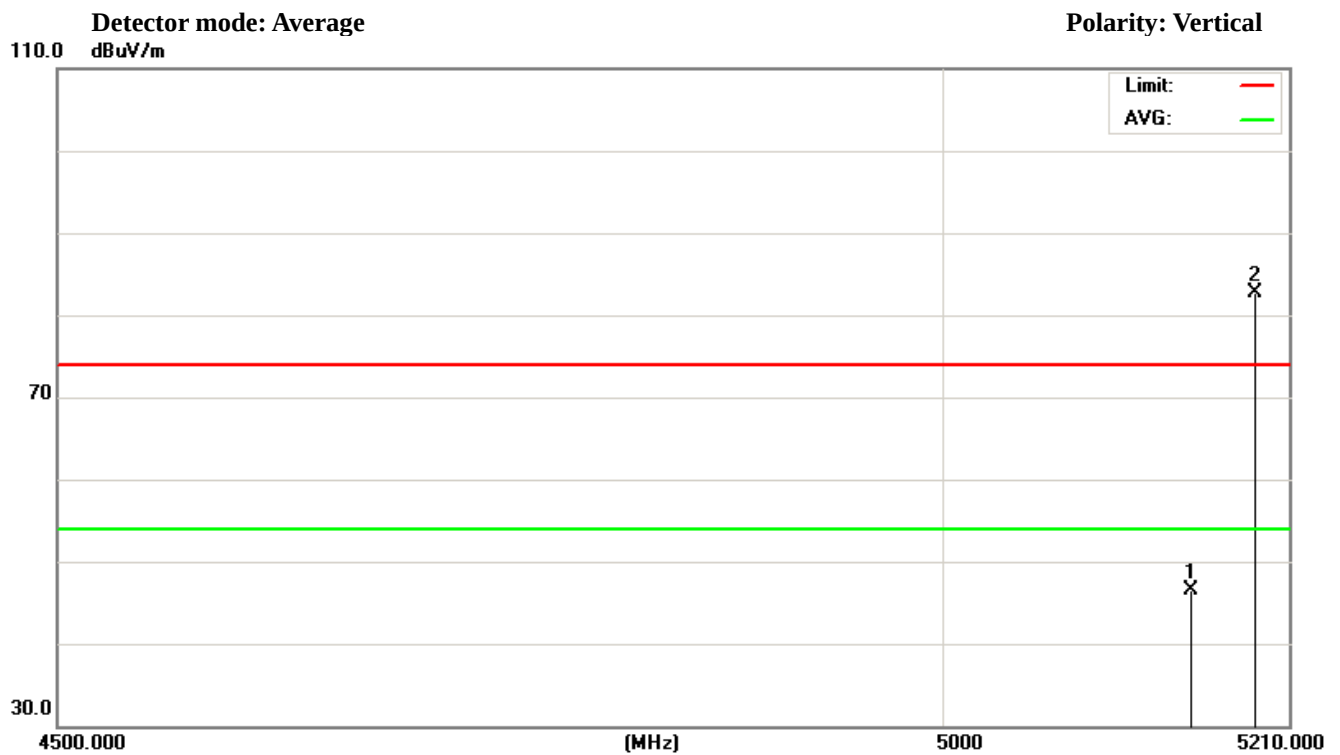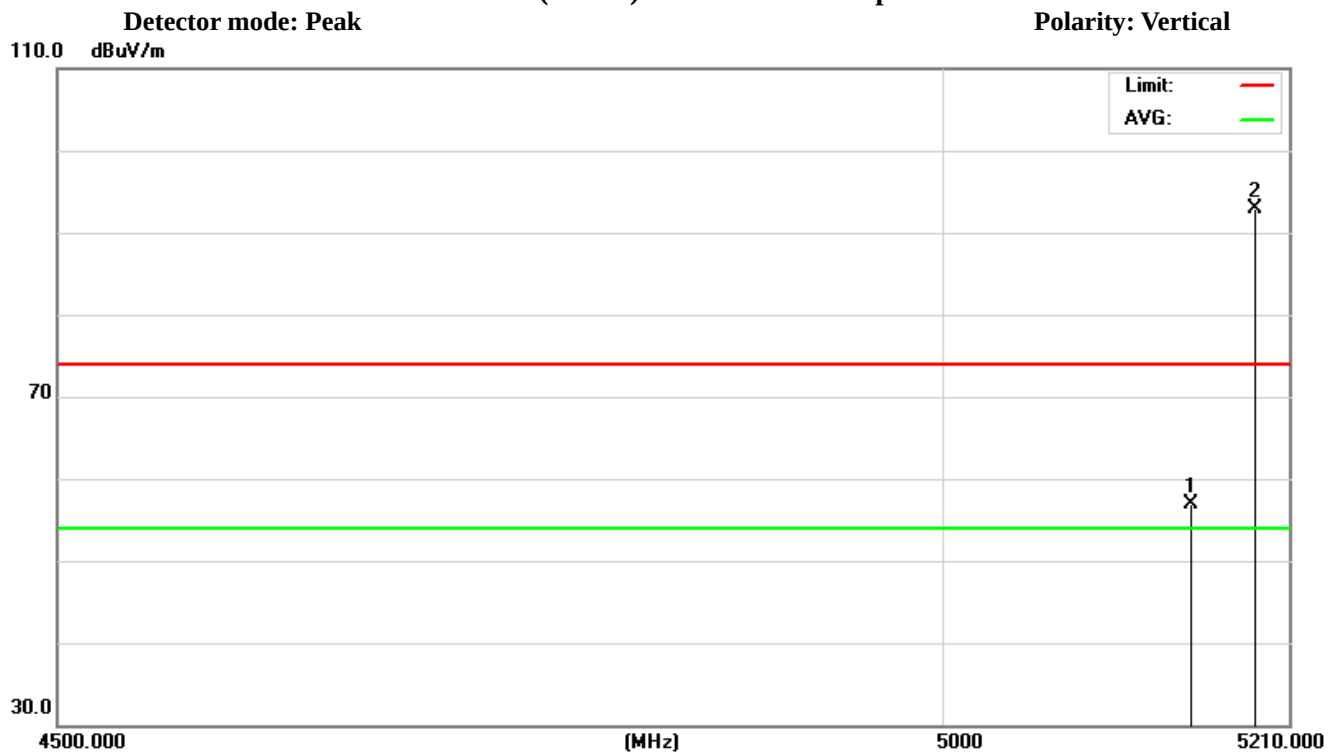

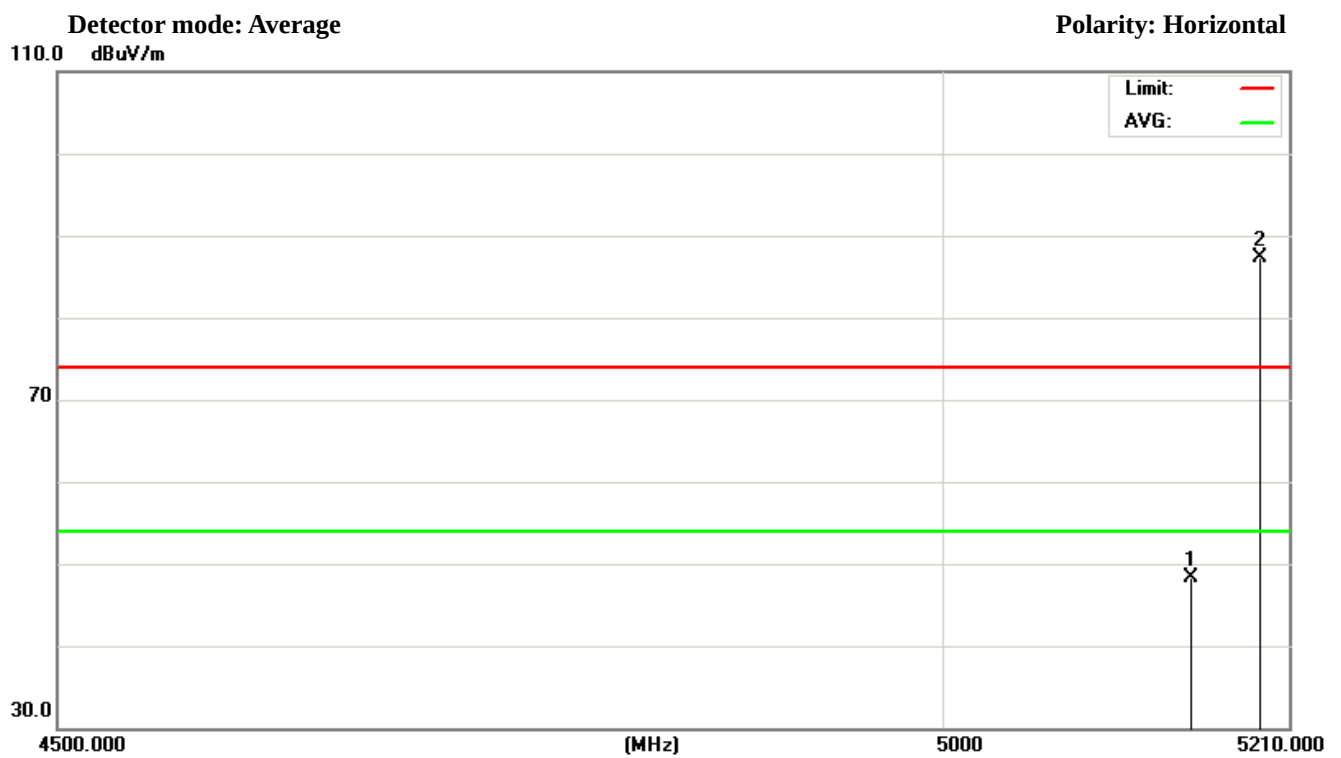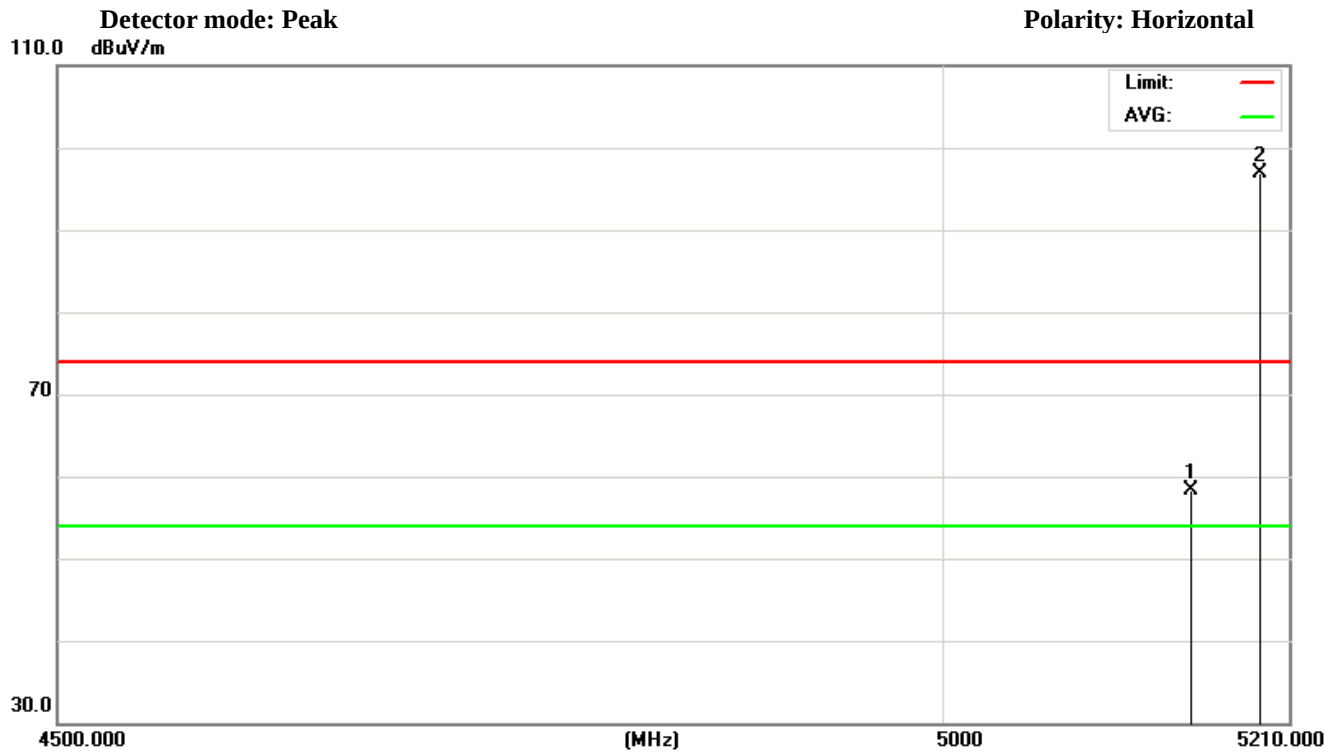

802.11n(40M) (5.15GHz-5.25GHz)
CH 46 (Upper) Data rate 7.2Mbps

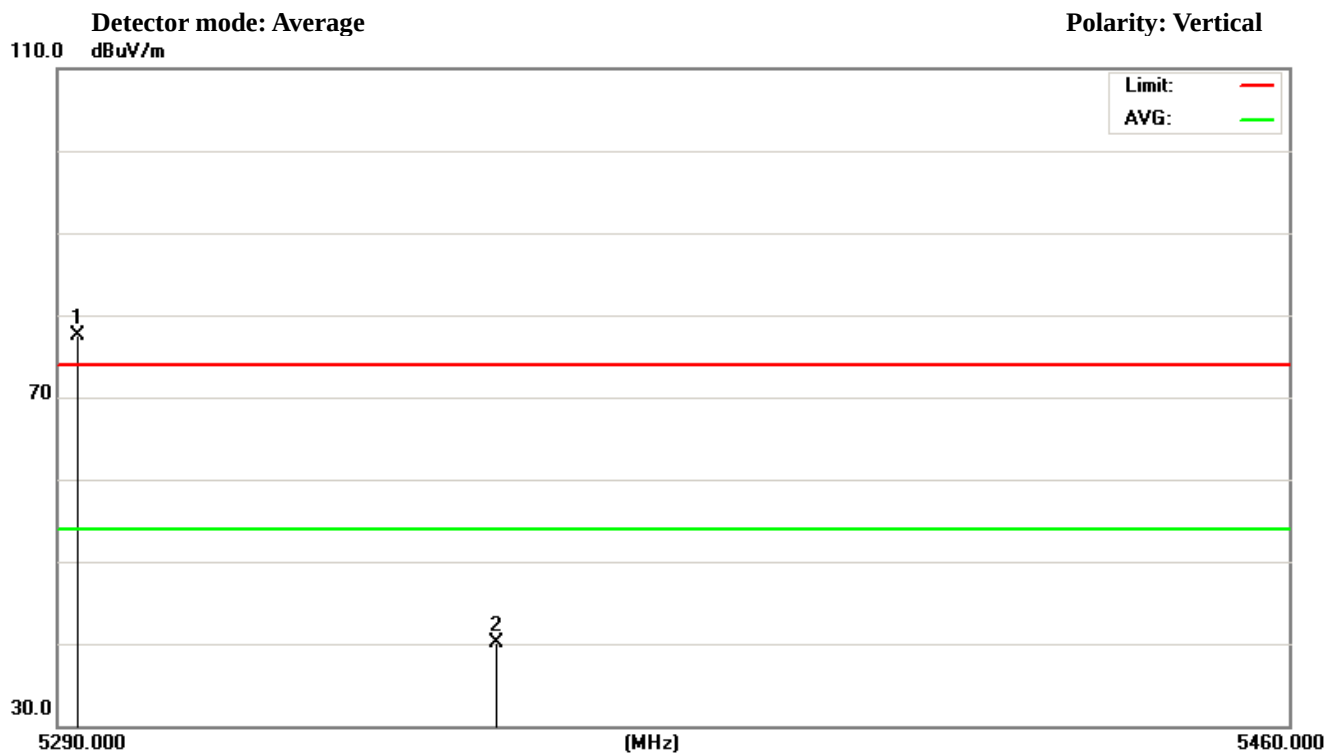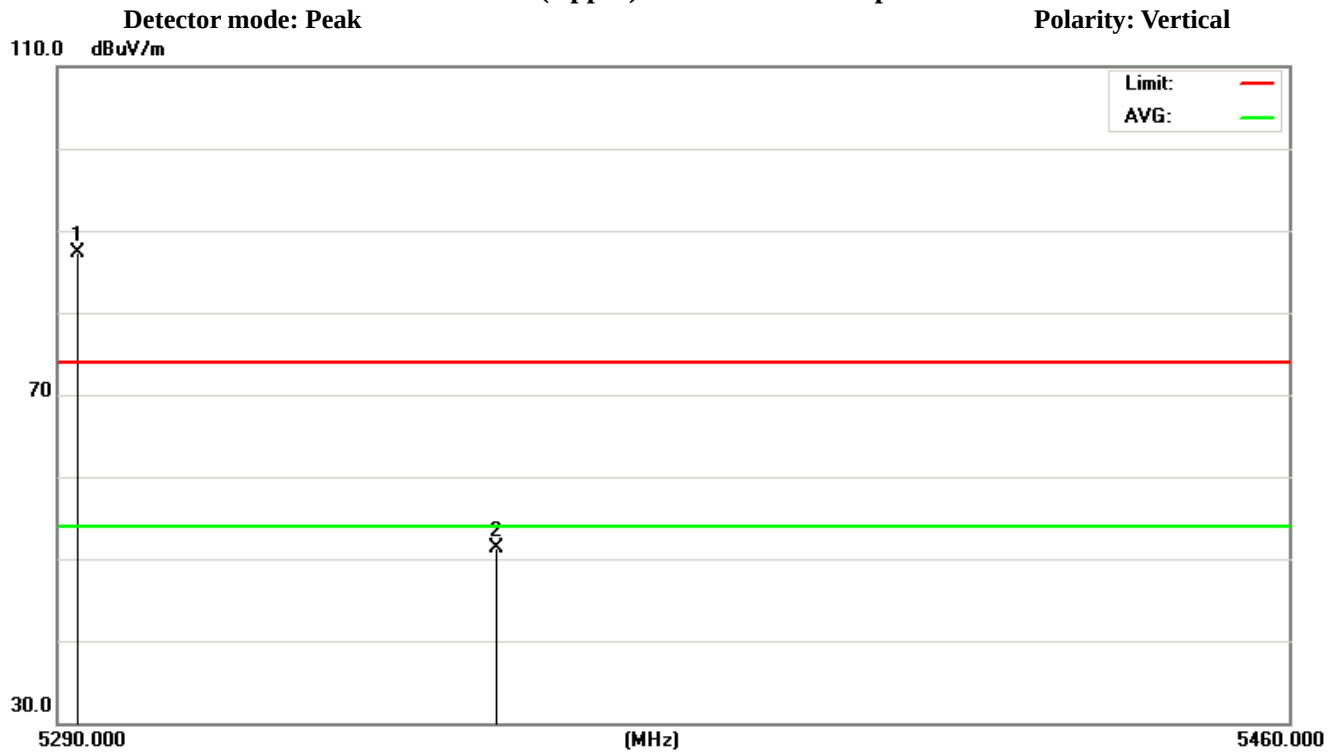

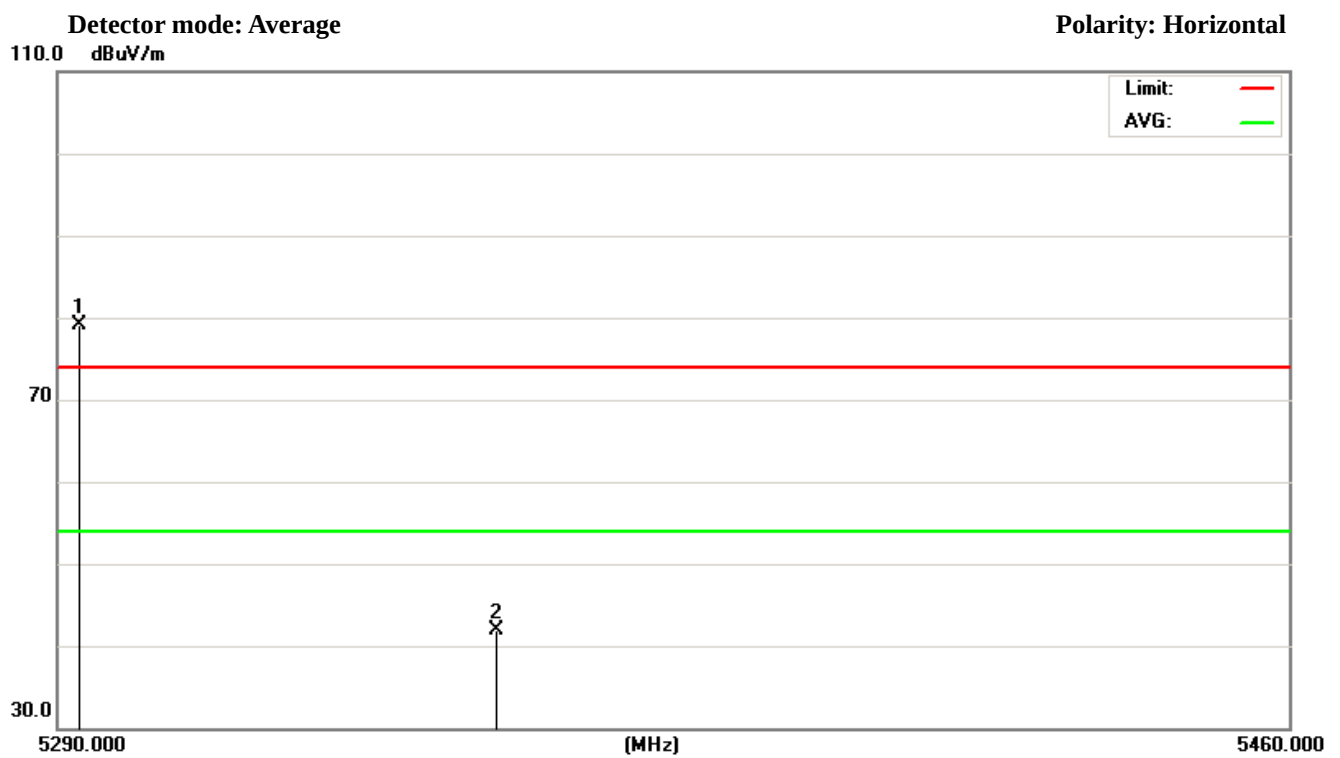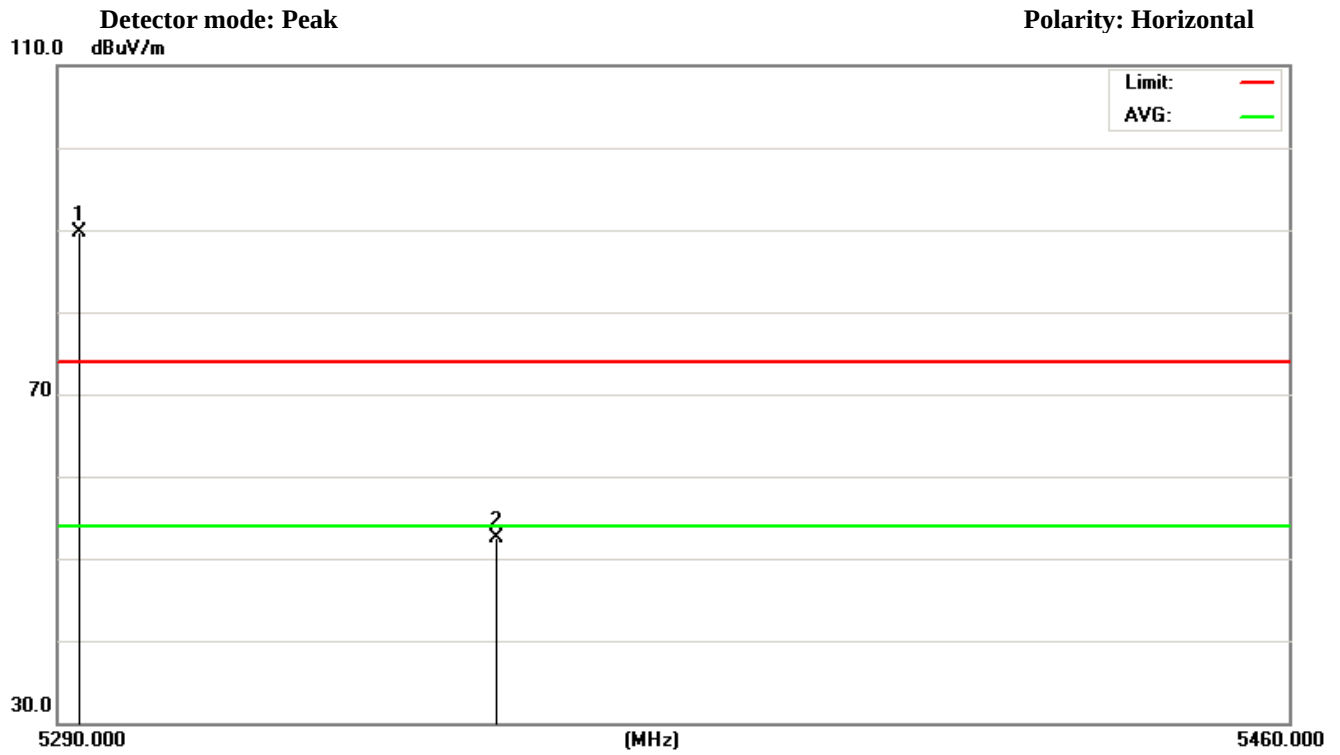



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	24 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11ac BW80MHz		
Test Date :	2020-03-12		
Note :	1. The transmitter was setup to transmit at the lowest channel (CH42). Then the field strength was measured at 4500-5460 MHz. 2. The data of 5150MHz and 5350MHz was the worst.		



Freq. (MHz) (Peak)	Freq. (MHz) (AV)	Ant.Pol. H/V	Reading		Ant/CF		Act		Limit		Note
			Peak (dBuv)	AV (dBuv)	Peak (dB)	AV (dB)	Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
5150.000	5150.000	V	51.52	43.26	4.78	4.78	56.3	48.04	74.00	54.00	CH42
5200.500	5200.347	V	83.17	72.98	4.62	4.62	---	---	---	---	CH42
5150.000	5150.000	H	52.24	45.12	4.78	4.78	57.02	49.9	74.00	54.00	CH42
5213.250	5214.415	H	86.39	76.74	4.59	4.59	---	---	---	---	CH42
5288.220	5287.380	V	89.87	80.13	4.43	4.43	---	---	---	---	CH58
5350.000	5350.000	V	53.16	43.28	4.30	4.30	57.46	47.58	74.00	54.00	CH58
5286.540	5288.430	H	94.88	84.97	4.43	4.43	---	---	---	---	CH58
5350.000	5350.000	H	53.46	43.25	4.30	4.30	57.76	47.55	74.00	54.00	CH58

Remark



- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.



802.11ac(80M) (5.15GHz-5.25GHz)
CH 42 Data rate 7.2Mbps

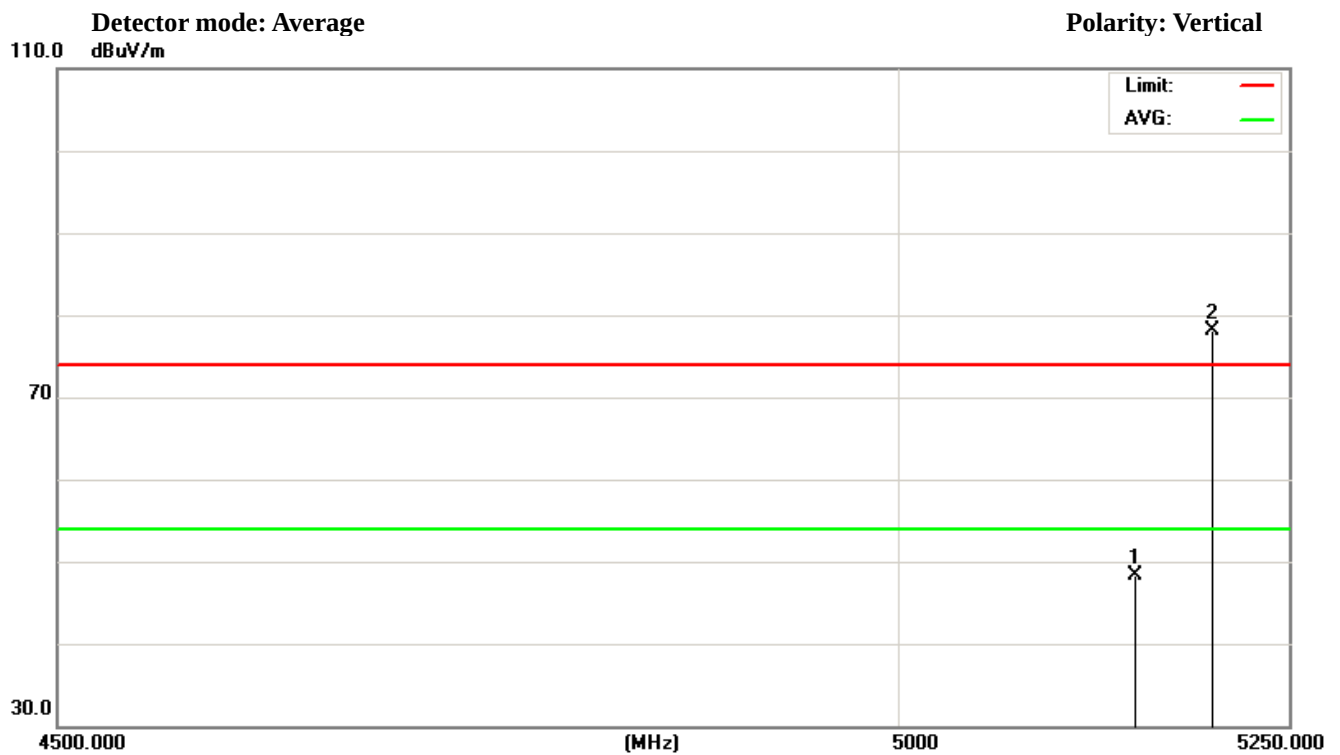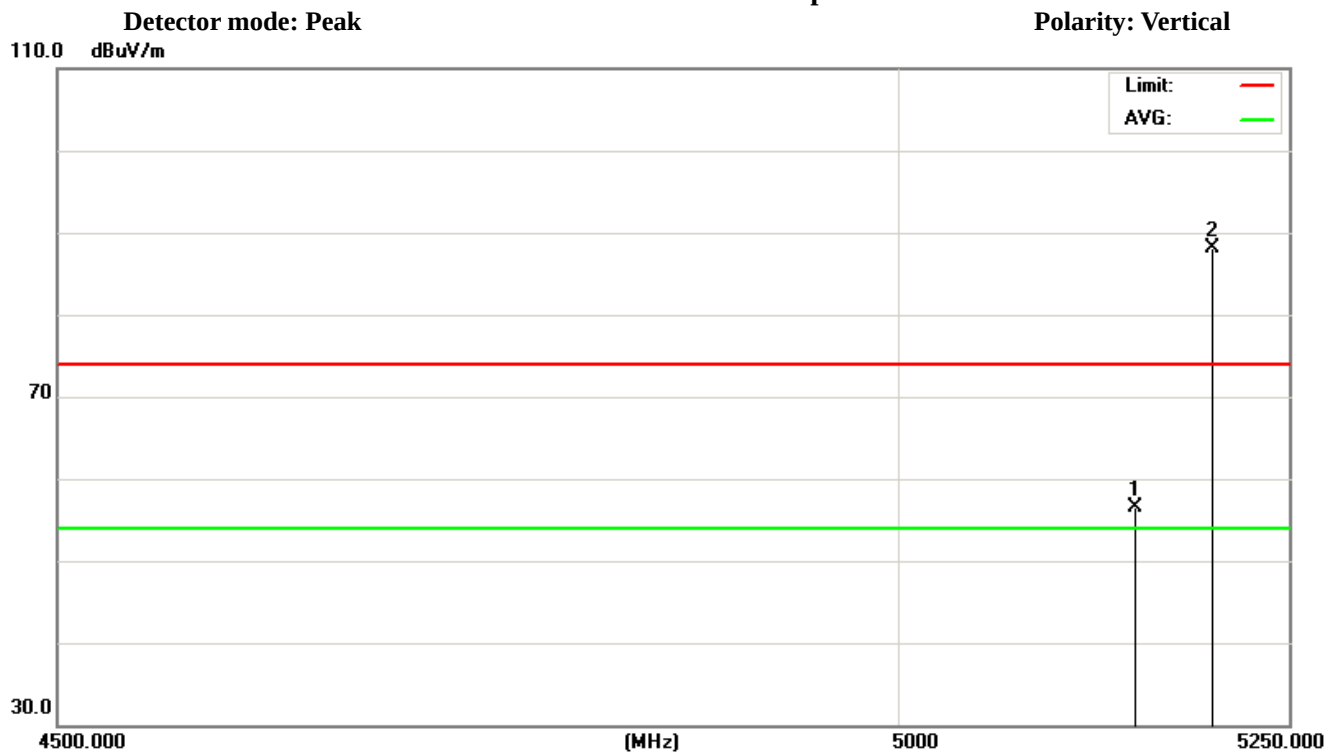

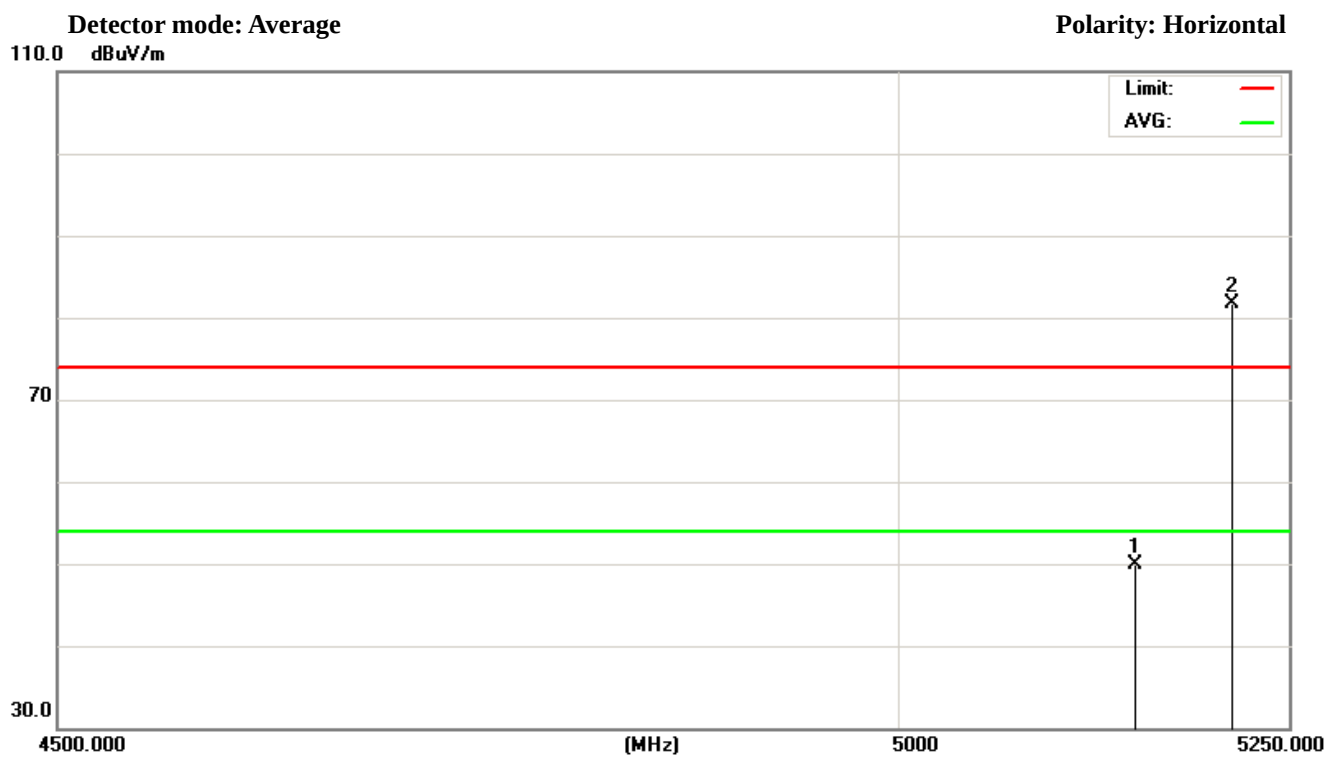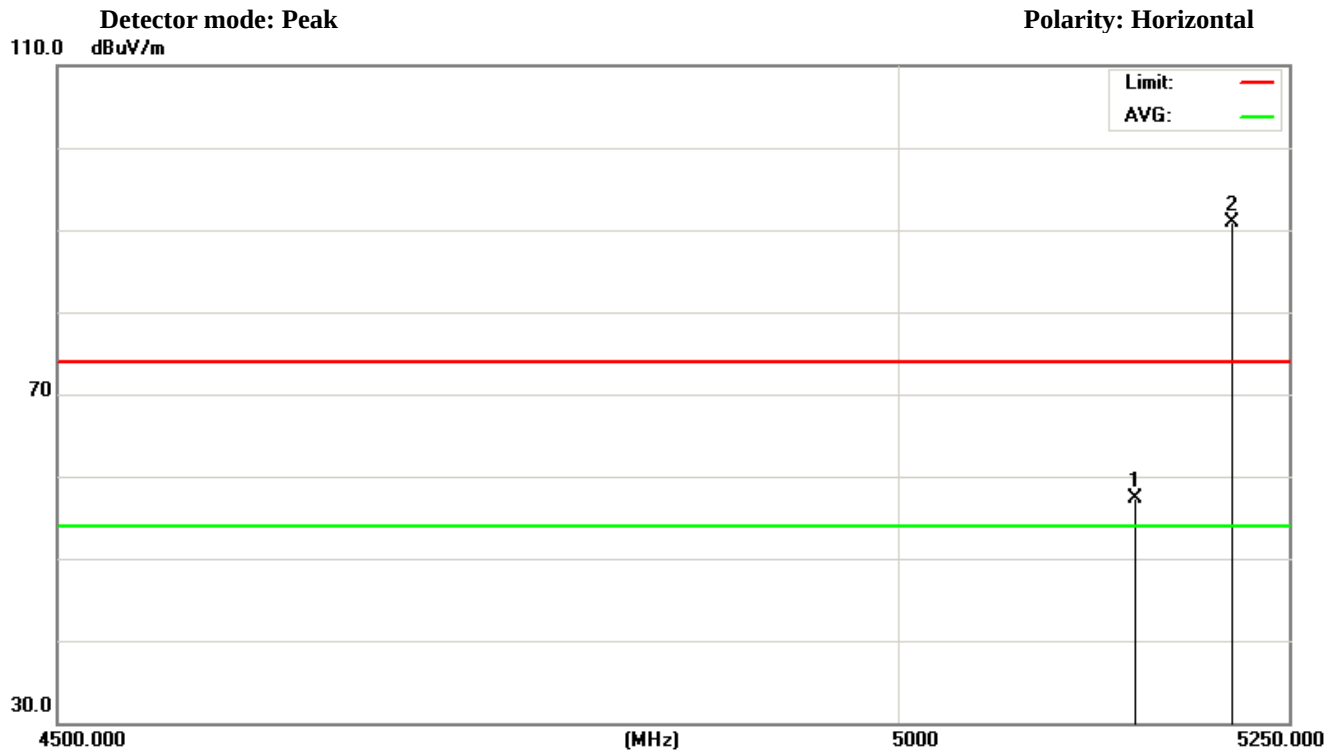

802.11ac(80M) (5.15GHz-5.25GHz)
CH 58 Data rate 7.2Mbps

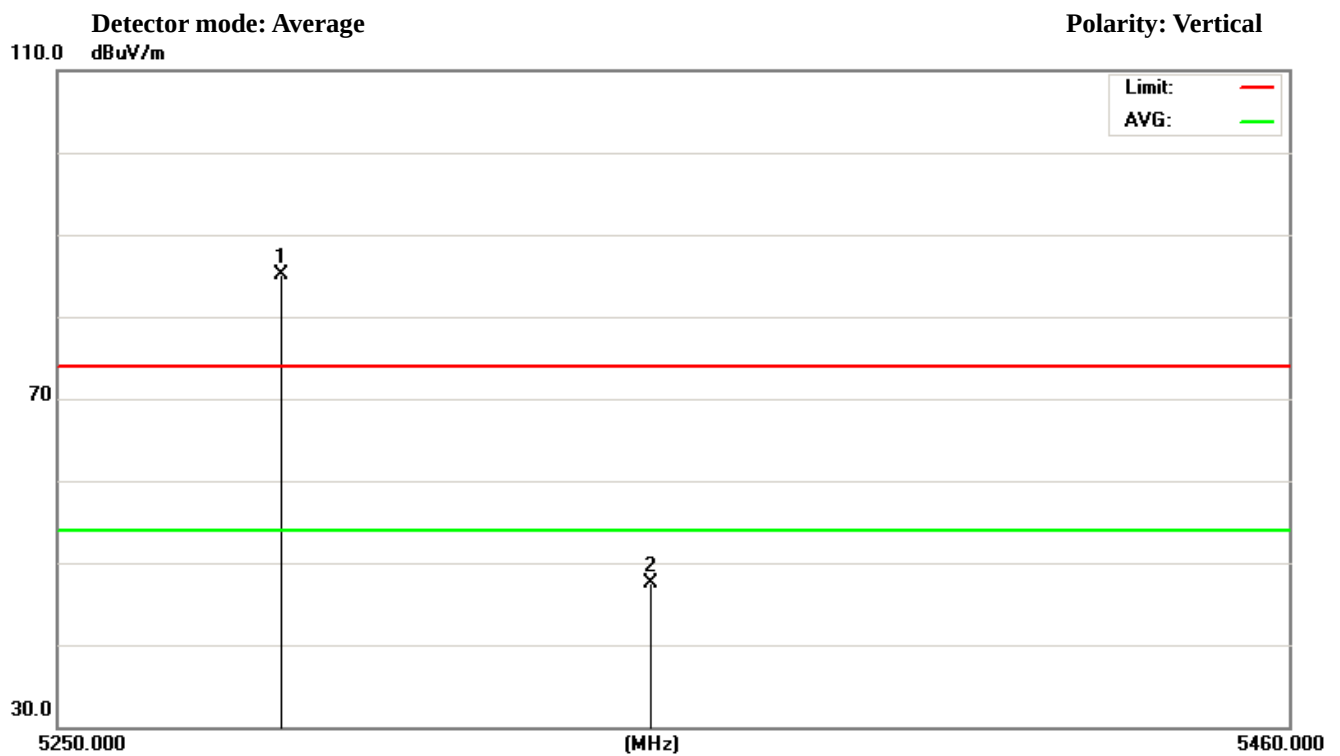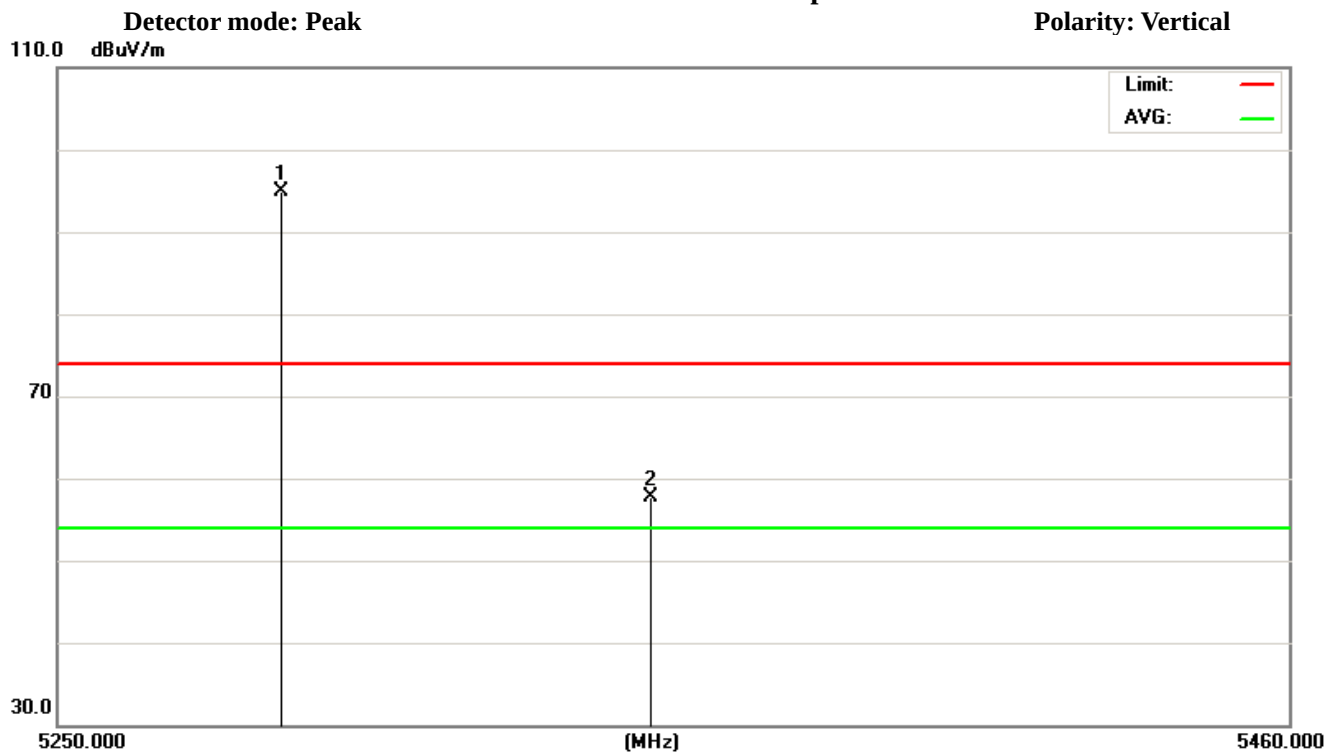

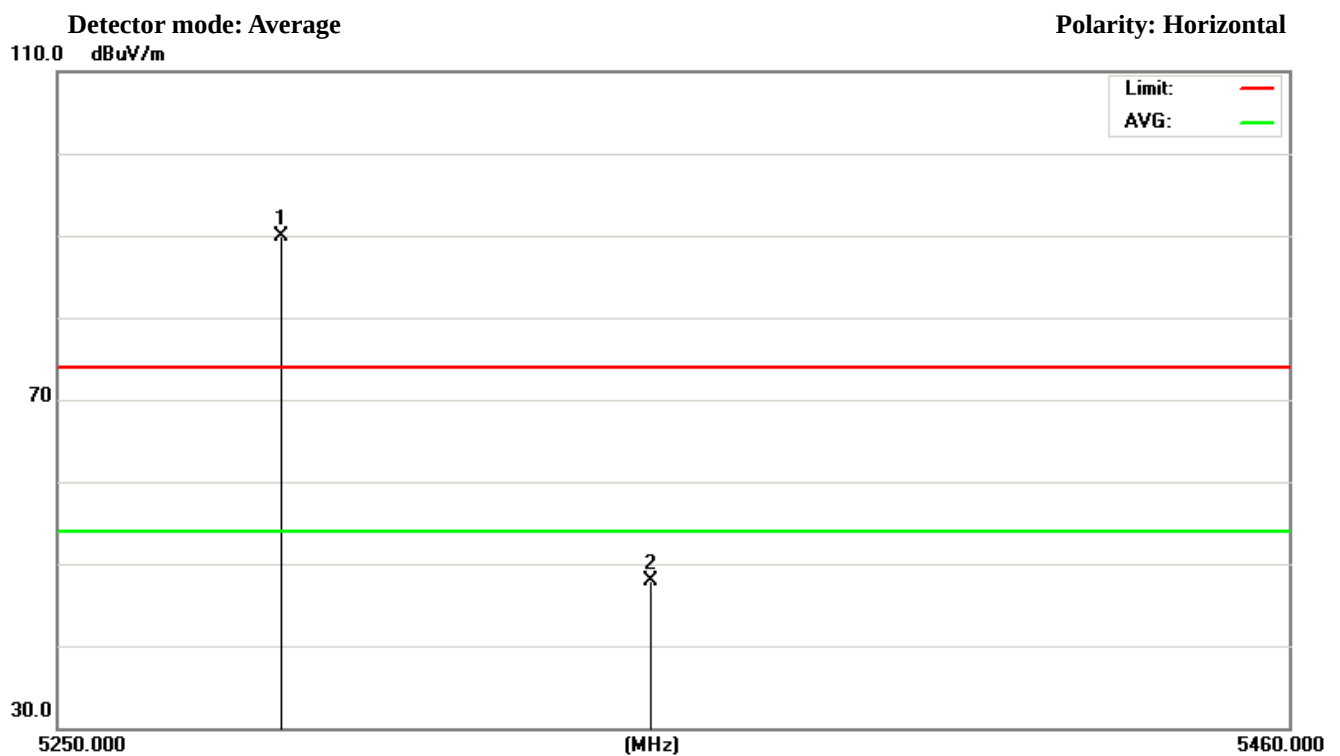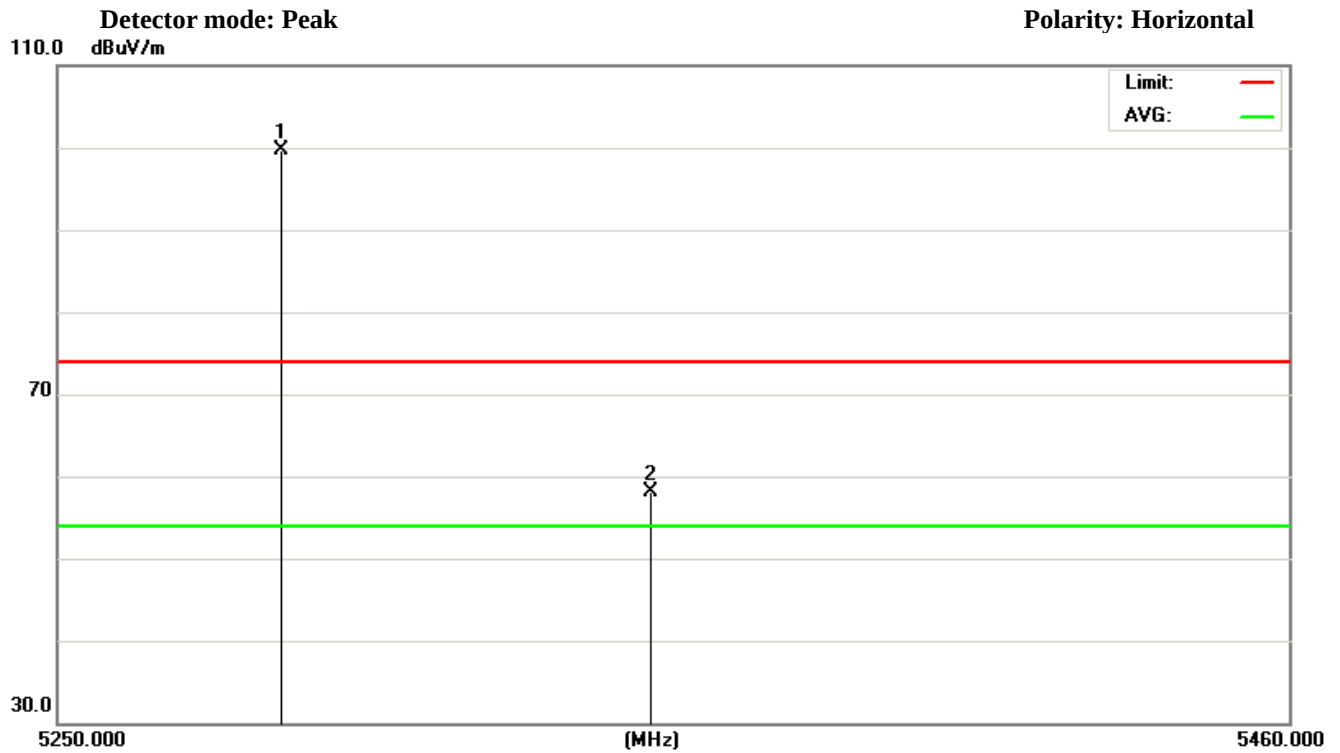

4 OCCUPIED BANDWIDTH TEST

4.1 26DB BANDWIDTH TEST

According to §15.303(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

4.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100kHz, VBW $\geq$ RBW, Sweep time = Auto.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP




4.5 TEST RESULTS


EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1010 hPa	Test Power :	DC12V from adapter
Test Mode :	802.11a/n20/ac20/n40/ac40/ac 80 (worst case)		
Test Date :	2020-03-12		

Test Mode	Test Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
802.11a (5.15GHz-5.25GHz) Data rate 6Mbps	CH36	5180	23.50
	CH44	5220	23.93
	CH48	5240	23.40
802.11n(20M) (5.15GHz-5.25GHz) Data rate 13Mbps	CH36	5180	24.79
	CH44	5220	24.34
	CH48	5240	24.11
802.11ac(20M) (5.15GHz-5.25GHz) Data rate 13Mbps	CH36	5180	24.18
	CH44	5220	24.22
	CH48	5240	23.96
802.11n(40M) (5.15GHz-5.25GHz) Data rate 27Mbps	CH38	5190	44.23
	CH46	5230	45.19
802.11ac(40M) (5.15GHz-5.25GHz) Data rate 27Mbps	CH38	5190	45.25
	CH46	5230	44.51
802.11ac(80M) (5.15GHz-5.25GHz) Data rate 58.6Mbps	CH42	5210	83.85


802.11a (5.15GHz-5.25GHz)
The Low Channel 36: 5180MHz

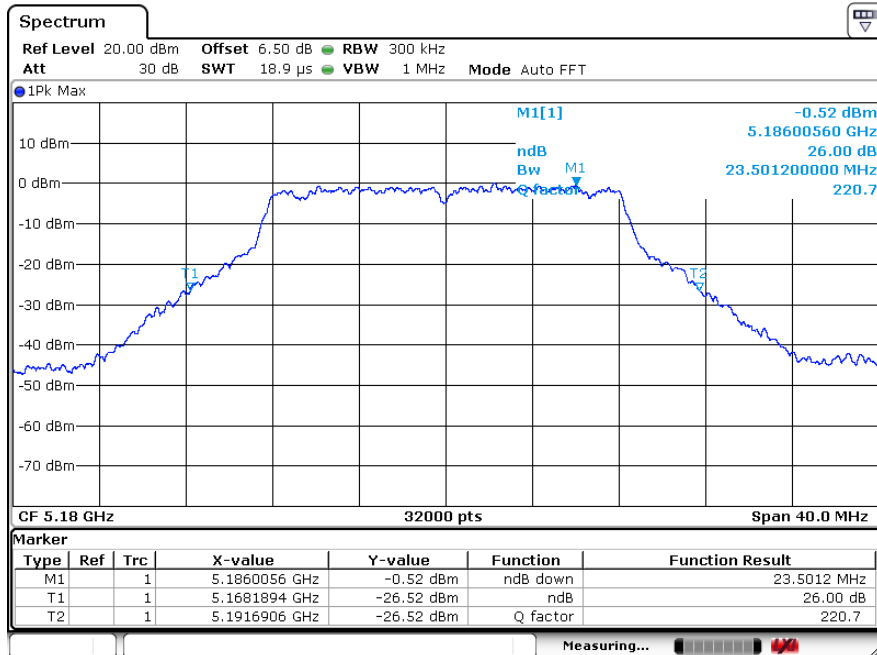


802.11a (5.15GHz-5.25GHz)
The Middle Channel 44: 5220MHz

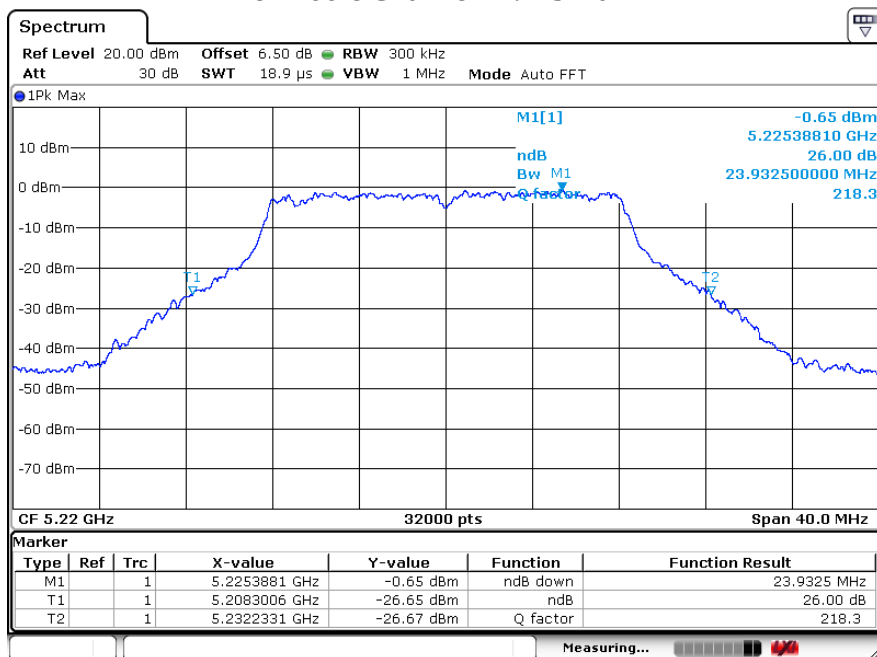


802.11a (5.15GHz-5.25GHz)
The High Channel 48: 5240MHz

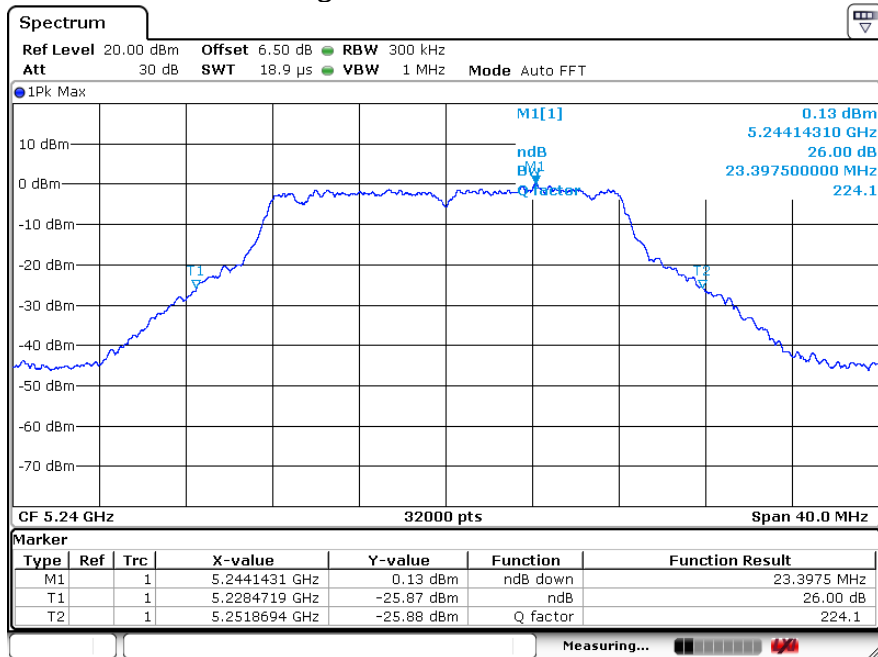


802.11n(20M) (5.15GHz-5.25GHz)
The Lowest Channel 36: 5180MHz

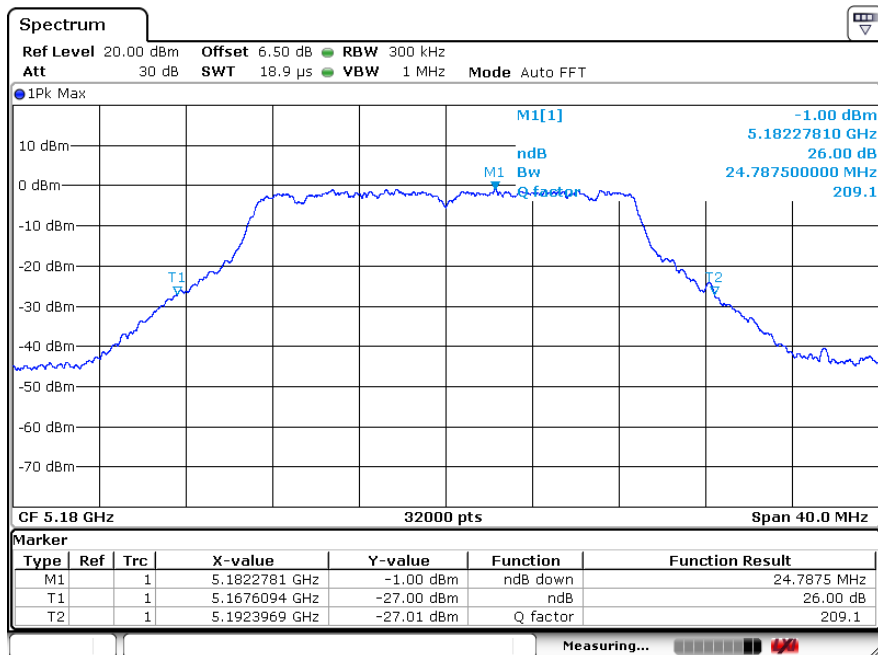


802.11n(20M) (5.15GHz-5.25GHz)
The Middle Channel 44: 5220MHz

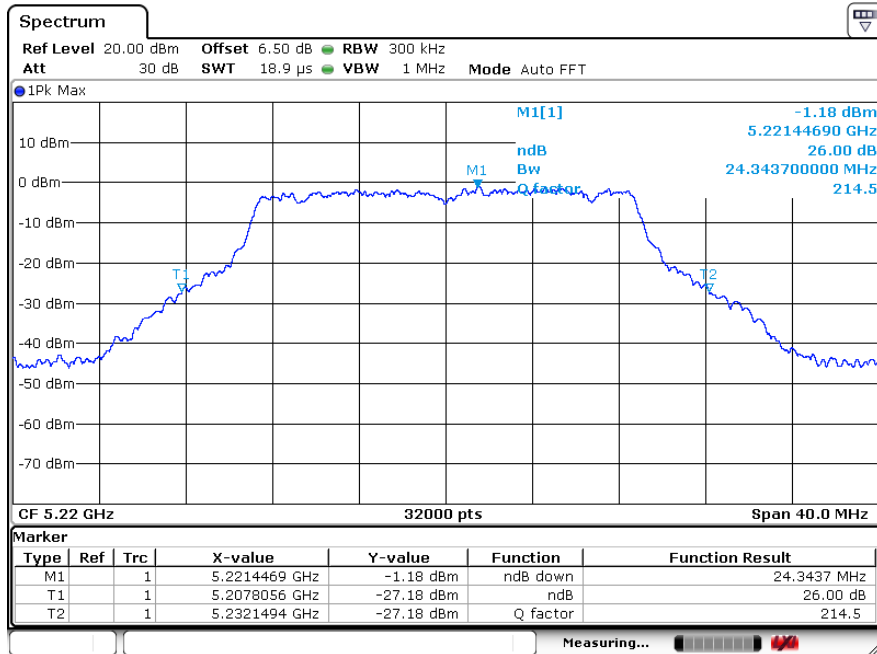


802.11n(20M) (5.15GHz-5.25GHz)
The High Channel 48: 5240MHz

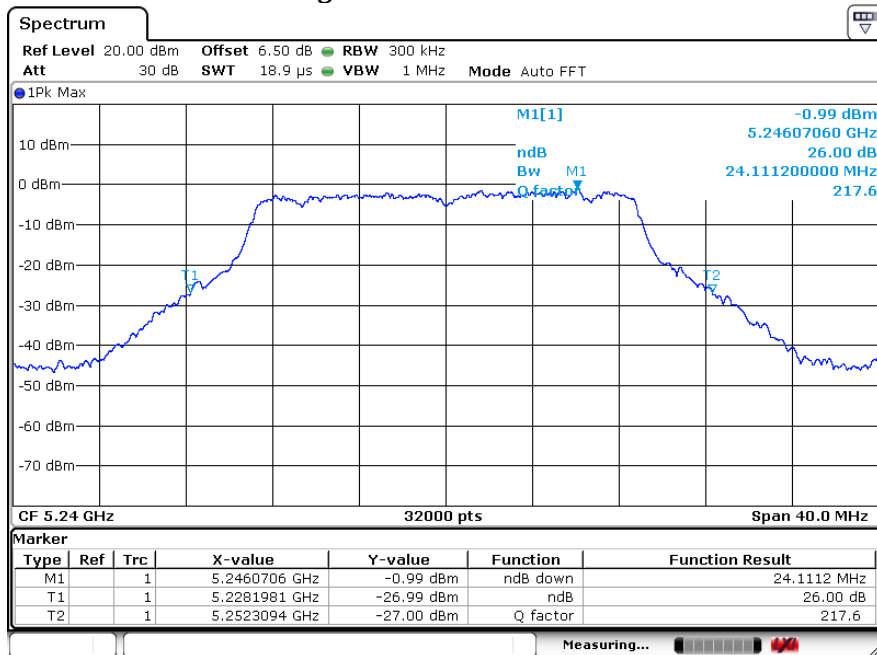


802.11ac(20M) (5.15GHz-5.25GHz)
The Middle Channel 36: 5180MHz

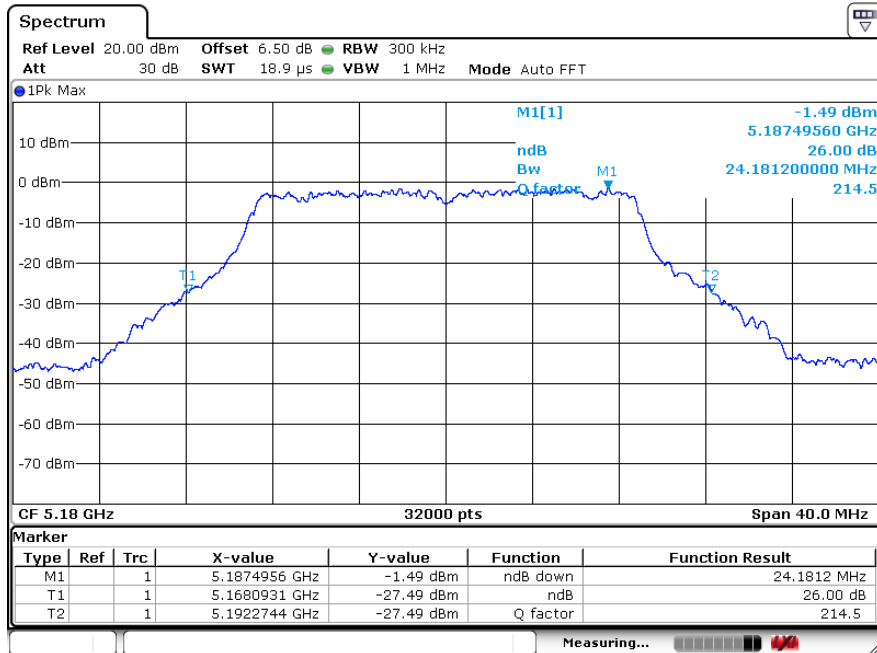


802.11n(20M) (5.15GHz-5.25GHz)
The High Channel 44: 5220MHz

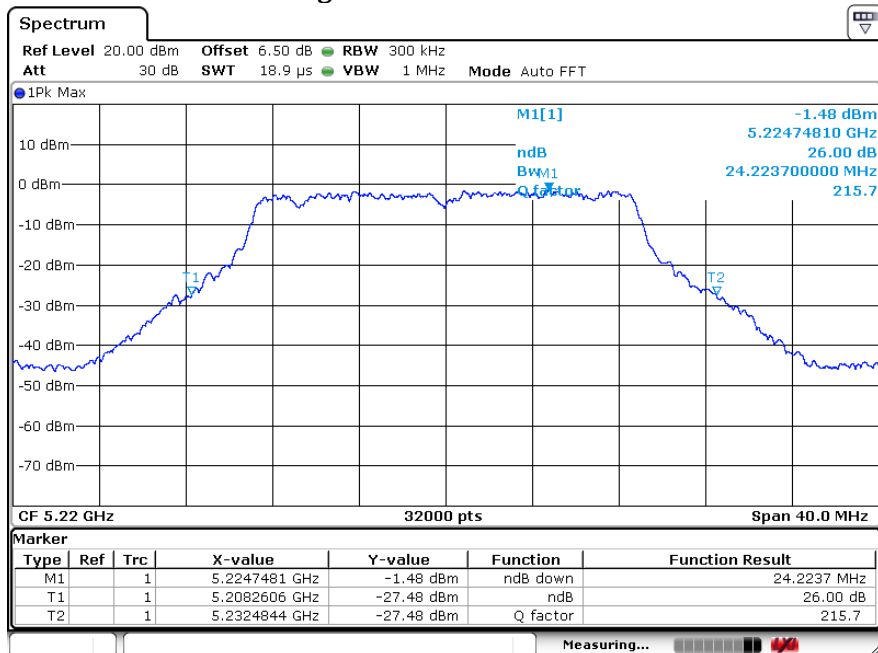


802.11ac(20M) (5.15GHz-5.25GHz)
The Middle Channel 48: 5240MHz

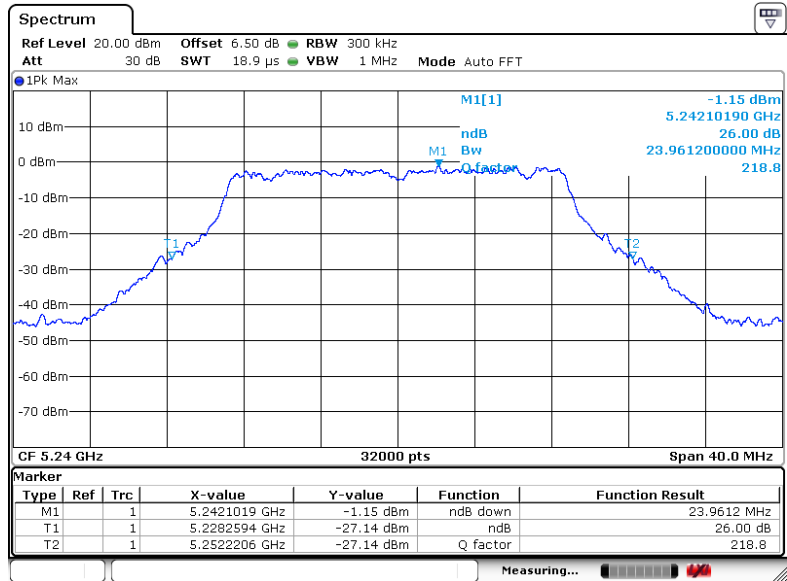


802.11n(40M) (5.15GHz-5.25GHz)
The Lowest Channel 38: 5190MHz

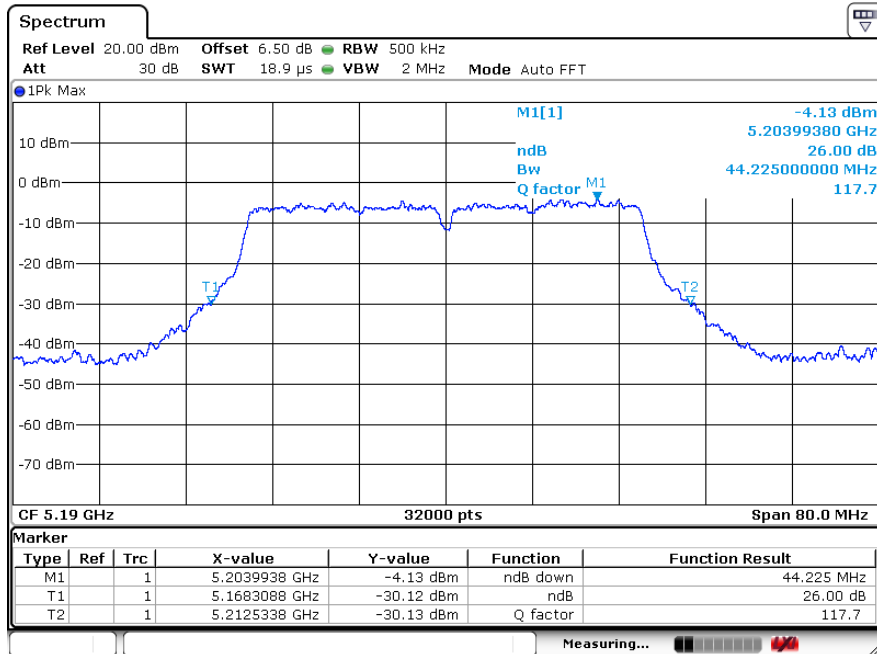


802.11n(40M) (5.15GHz-5.25GHz)
The High Channel 46: 5230MHz

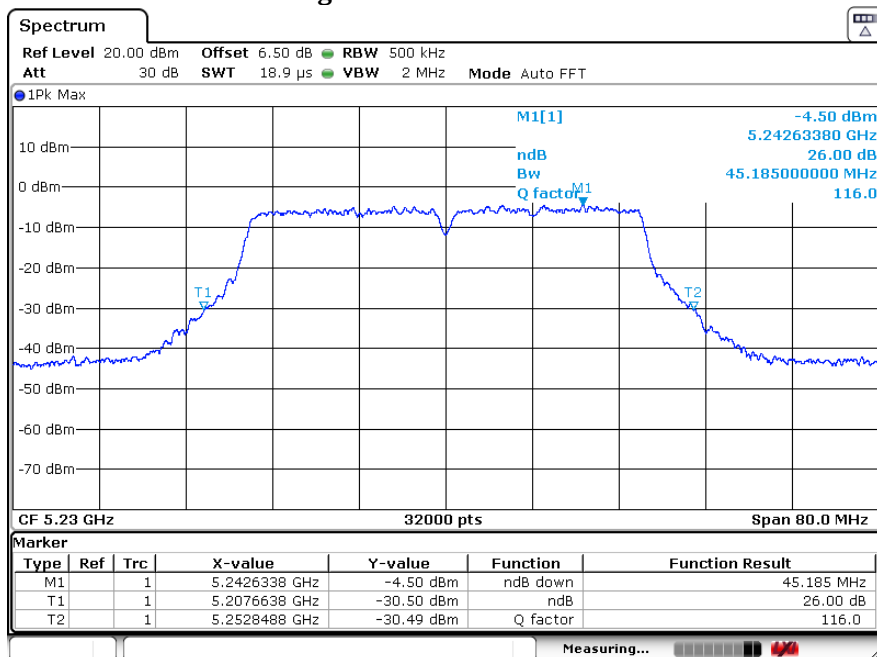


802.11ac(40M) (5.15GHz-5.25GHz)
The Lowest Channel 38: 5190MHz

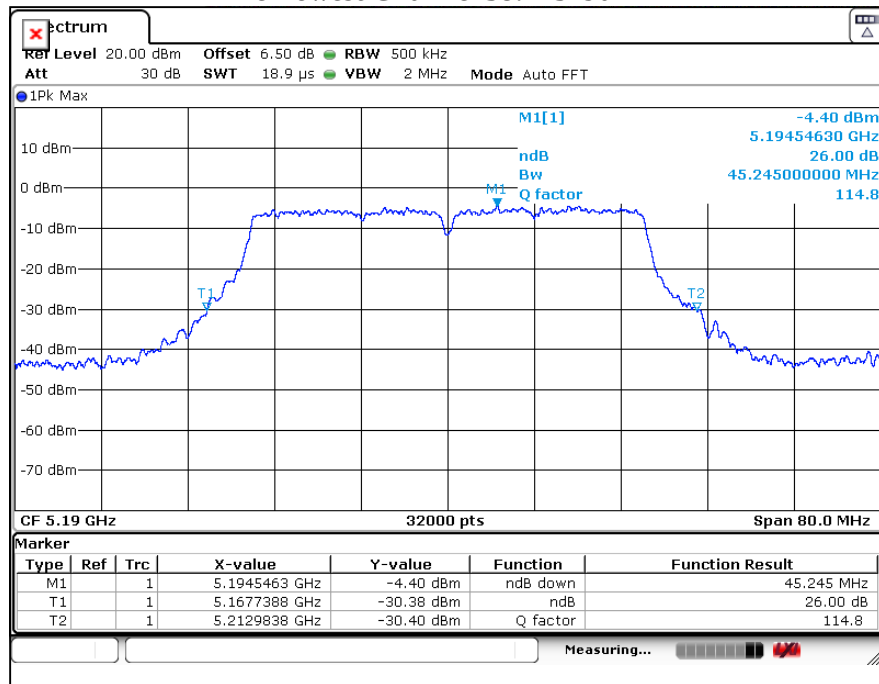

802.11ac(40M) (5.15GHz-5.25GHz)
The High Channel 46: 5230MHz

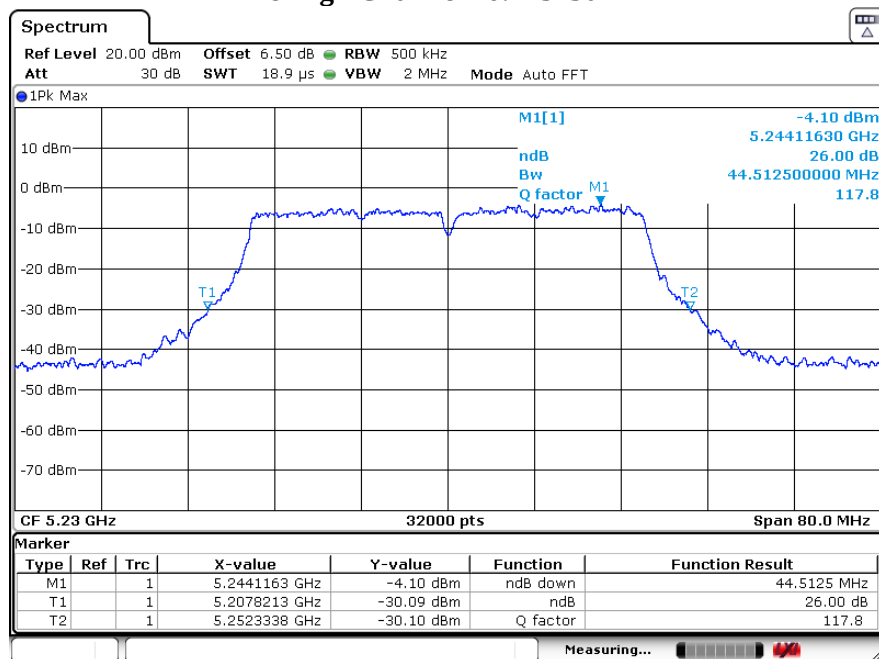


802.11ac(80M) (5.15GHz-5.25GHz) The Lowest Channel 42: 5210MHz

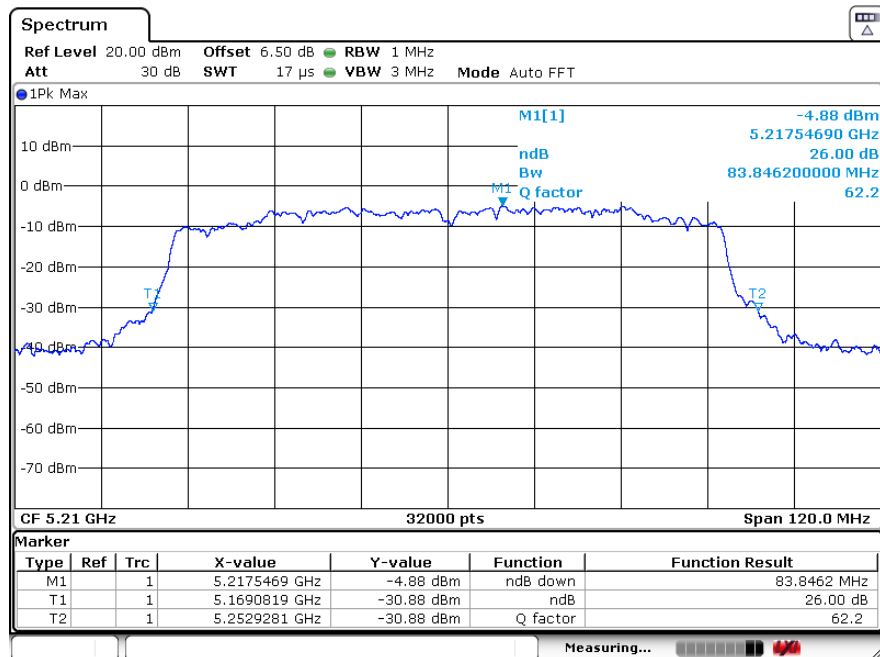


EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1010 hPa	Test Power :	DC12V from adapter
Test Mode :	802.11a/n20/ac20/n40/ac40/ac80 (worst case)		
Test Date :	2020-03-12		

Test Mode	Test Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
802.11a (5.25GHz-5.35GHz) Data rate 6Mbps	CH52	5260	23.34
	CH56	5280	23.34
	CH64	5320	23.82
802.11n(20M) (5.25GHz-5.35GHz) Data rate 13Mbps	CH52	5260	24.51
	CH56	5280	23.74
	CH64	5320	24.38
802.11ac(20M) (5.25GHz-5.35GHz) Data rate 13Mbps	CH52	5260	24.14
	CH56	5280	24.01
	CH64	5320	23.90
802.11n(40M) (5.25GHz-5.35GHz) Data rate 27Mbps	CH54	5270	44.85
	CH62	5310	43.72
802.11ac(40M) (5.25GHz-5.35GHz) Data rate 27Mbps	CH54	5270	43.97
	CH62	5310	43.08
802.11ac(80M) (5.25GHz-5.35GHz) Data rate 58.6Mbps	CH58	5290	84.08


802.11a (5.25GHz-5.35GHz) The Lowest Channel 52: 5260MHz

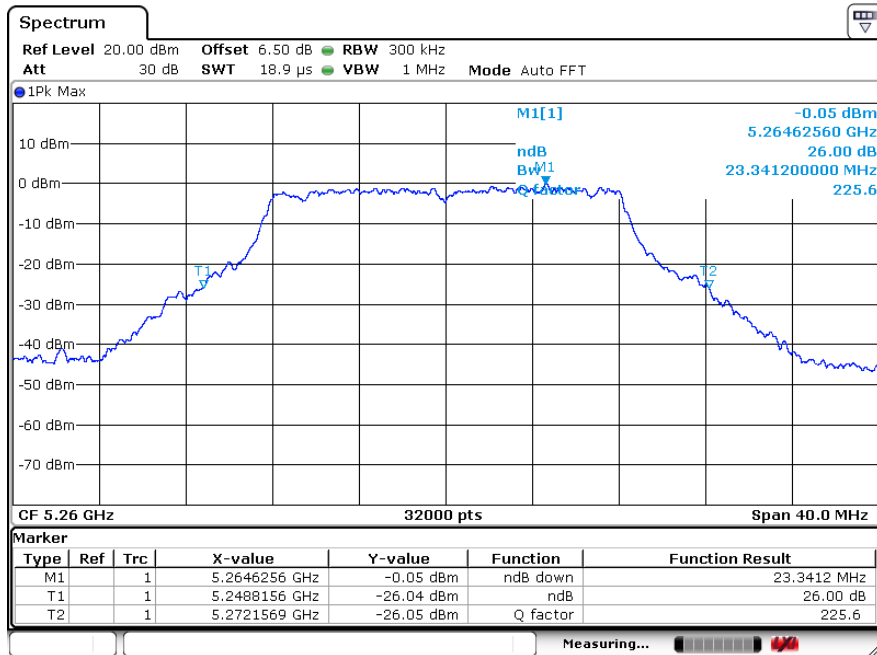


802.11a (5.25GHz-5.35GHz) The Middle Channel 56: 5280MHz

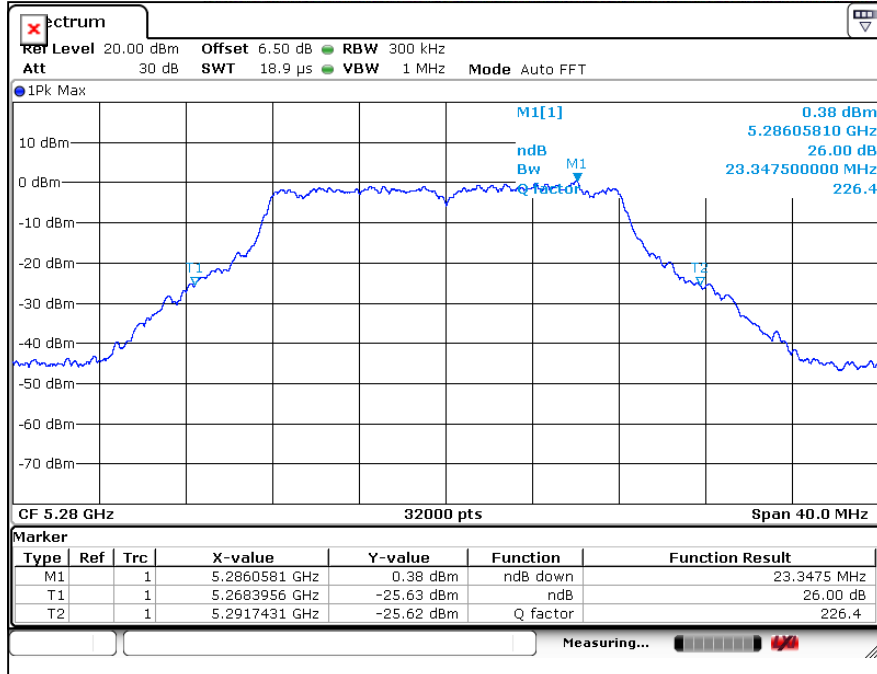


802.11a (5.25GHz-5.35GHz)
The High Channel 64: 5320MHz

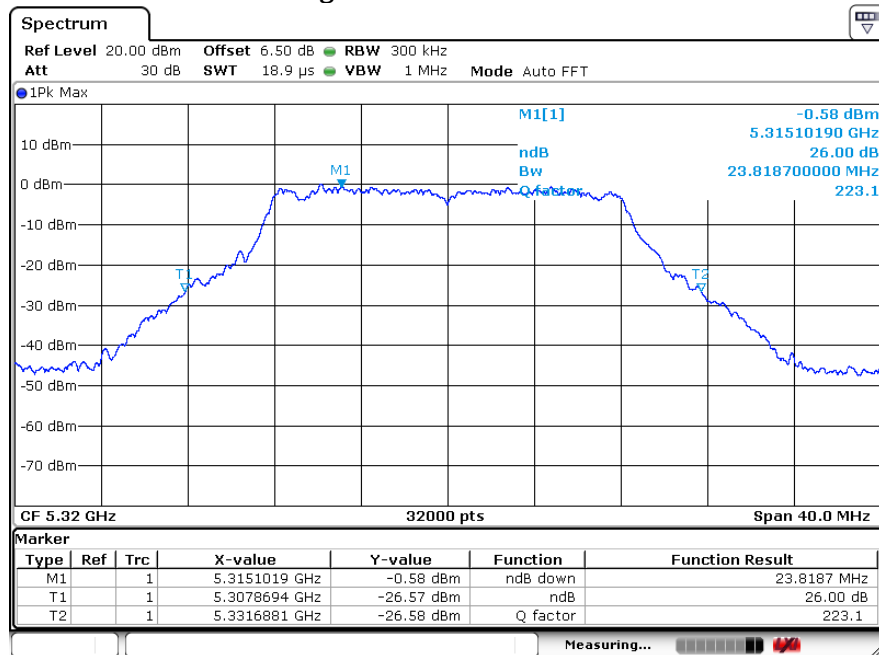


802.11n(20M) (5.25GHz-5.35GHz)
The Lowest Channel 52: 5260MHz

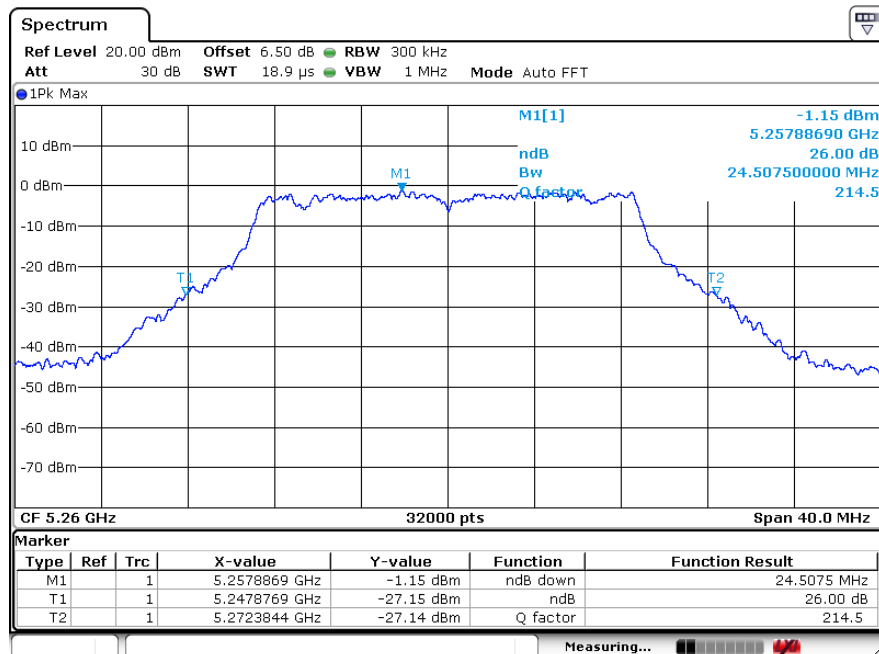


802.11n(20M) (5.25GHz-5.35GHz)
The Middle Channel 56: 5280MHz

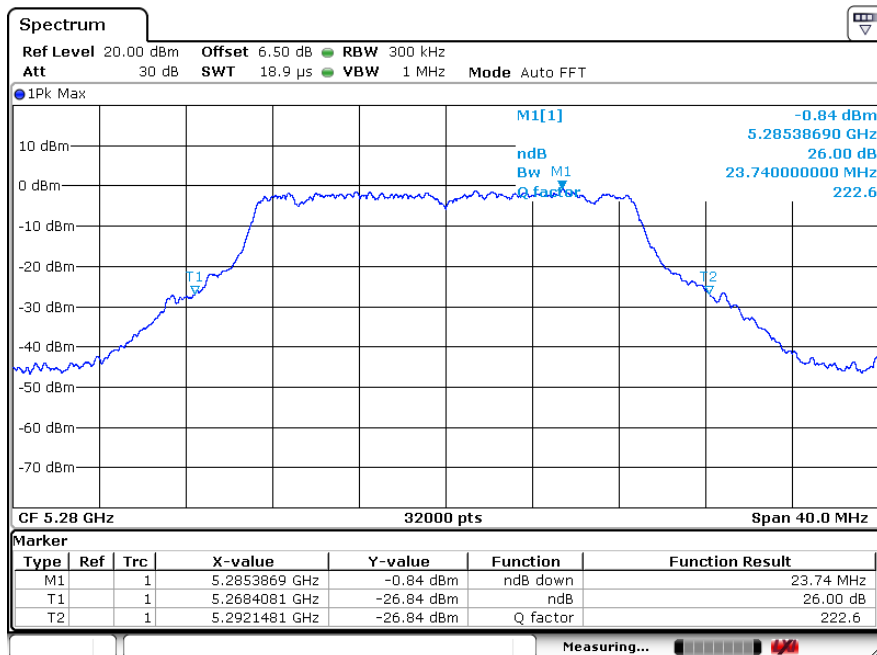


802.11n(20M) (5.25GHz-5.35GHz)
The High Channel 64: 5320MHz

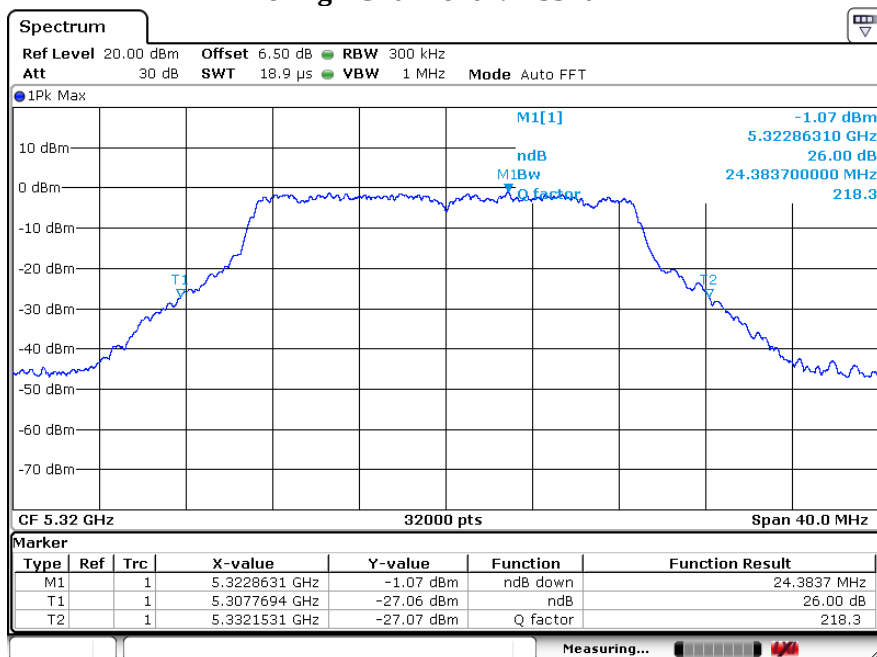


802.11ac (5.25GHz-5.35GHz) The Lowest Channel 52: 5260MHz

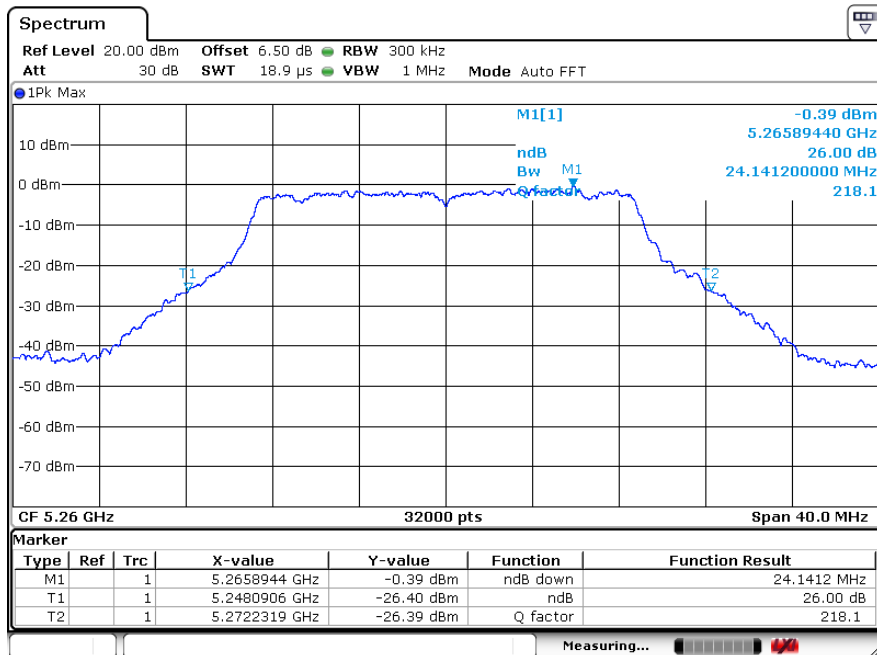


802.11ac (5.25GHz-5.35GHz) The Middle Channel 56: 5280MHz

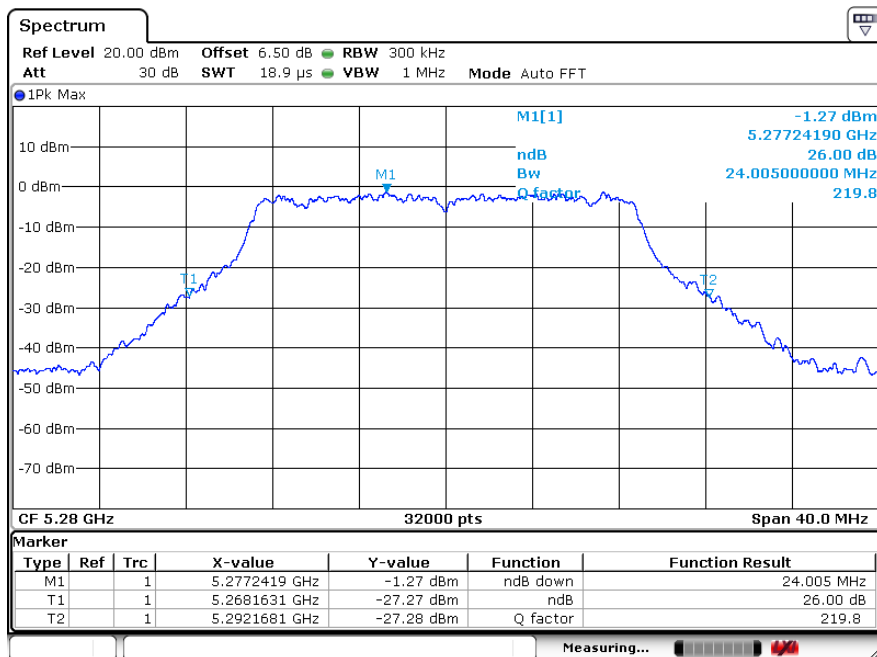


802.11ac (5.25GHz-5.35GHz) The High Channel 64: 5320MHz

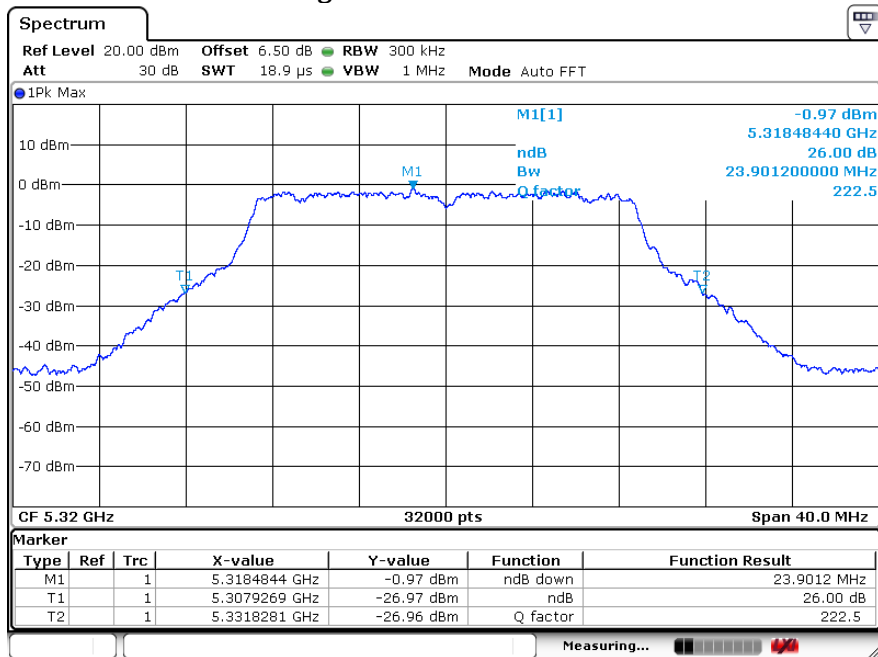


802.11n(40M) (5.25GHz-5.35GHz)
The Lowest Channel 54: 5270MHz

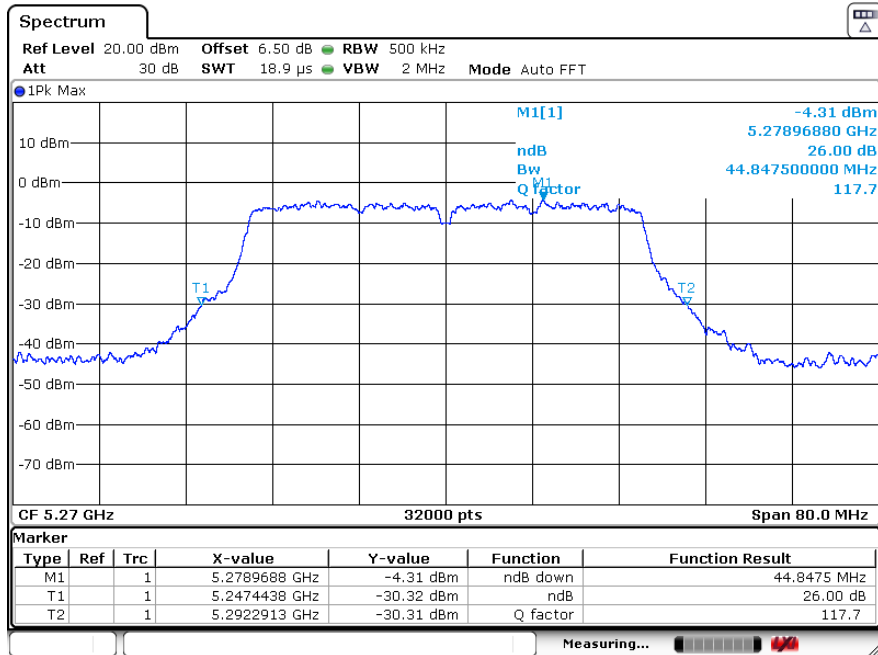


802.11n(40M) (5.25GHz-5.35GHz)
The High Channel 62: 5310MHz

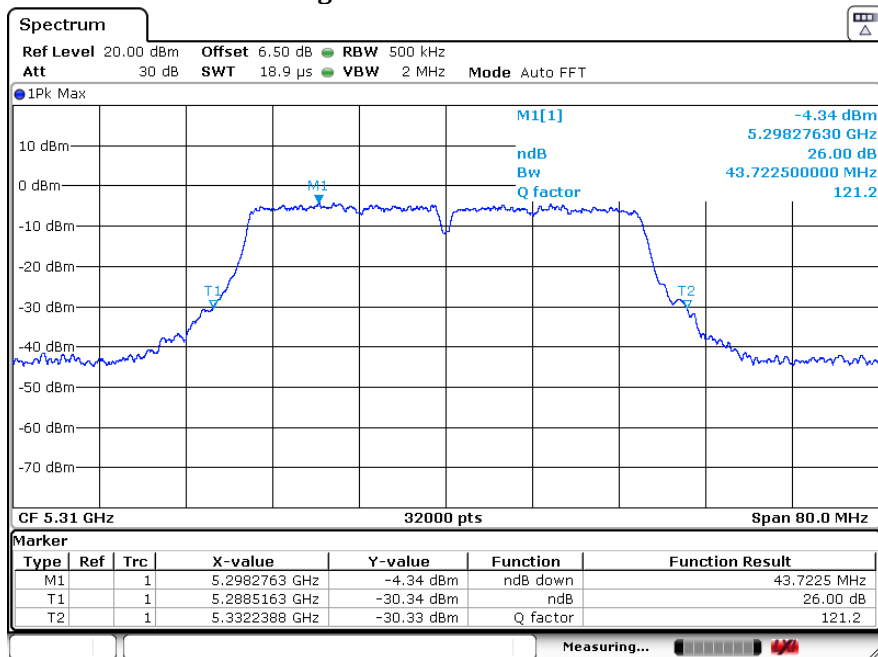


802.11ac(40M) (5.25GHz-5.35GHz) The Lowest Channel 54: 5270MHz

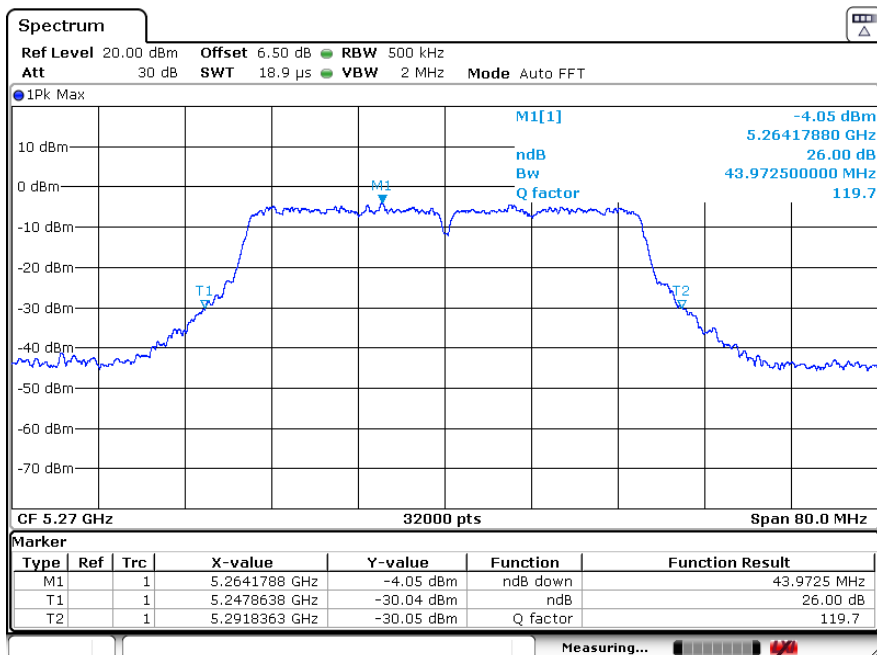

802.11ac(40M) (5.25GHz-5.35GHz) The High Channel 62: 5310MHz

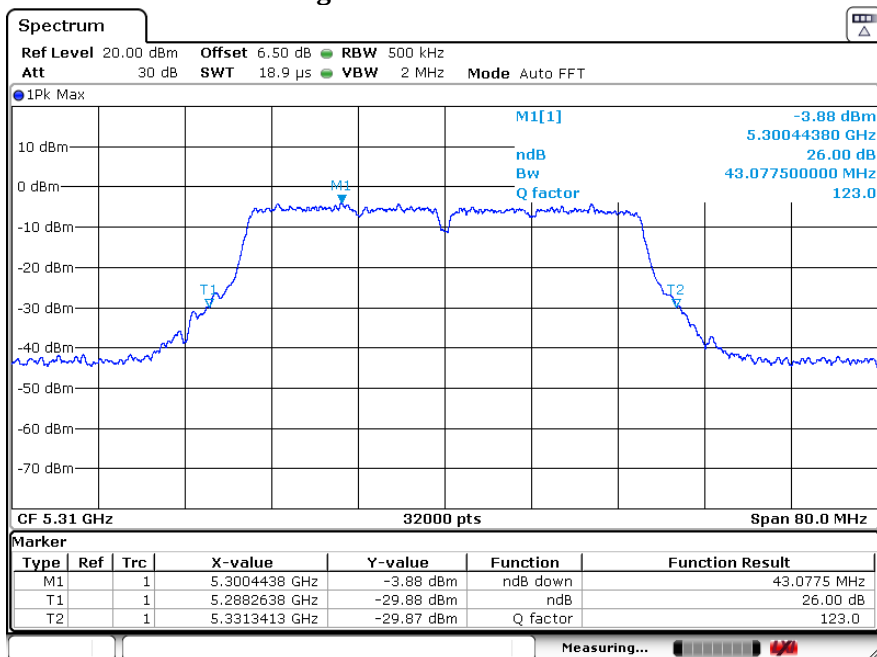


802.11ac(80M) (5.25GHz-5.35GHz) The High Channel 58: 5290MHz

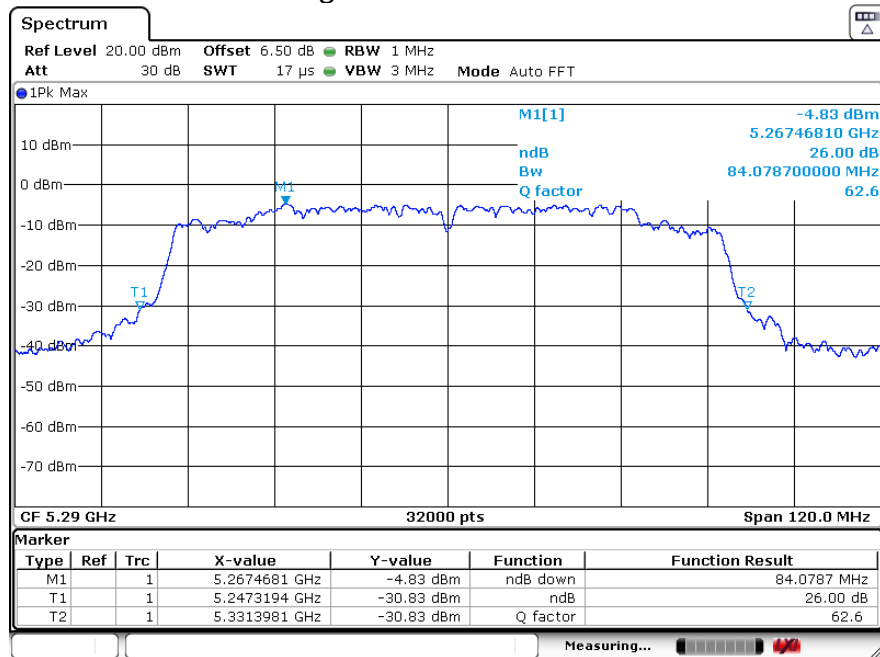


EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1010 hPa	Test Power :	DC12V from adapter
Test Mode :	802.11a/n20/ac20/n40/ac40/ac80 (worst case)		
Test Date :	2020-03-12		

Test Mode	Test Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
802.11a (5.47GHz-5.725GHz) Data rate 6Mbps	CH100	5500	23.74
	CH120	5600	23.99
	CH140	5700	24.03
802.11n(20M) (5.47GHz-5.725GHz) Data rate 13Mbps	CH100	5500	23.91
	CH120	5600	24.04
	CH140	5700	24.47
802.11ac(20M) (5.47GHz-5.725GHz) Data rate 13Mbps	CH100	5600	24.08
	CH120	5580	24.63
	CH140	5700	24.82
802.11n(40M) (5.47GHz-5.725GHz) Data rate 27Mbps	CH102	5510	44.33
	CH118	5590	44.40
	CH134	5670	44.64
802.11ac(40M) (5.47GHz-5.725GHz) Data rate 27Mbps	CH102	5510	44.44
	CH118	5590	44.71
	CH134	5670	45.29
802.11ac(80M) (5.47GHz-5.725GHz) Data rate 58.6Mbps	CH106	5530	83.83


802.11a (5.47GHz-5.725GHz) The Lowest Channel 100: 5500MHz

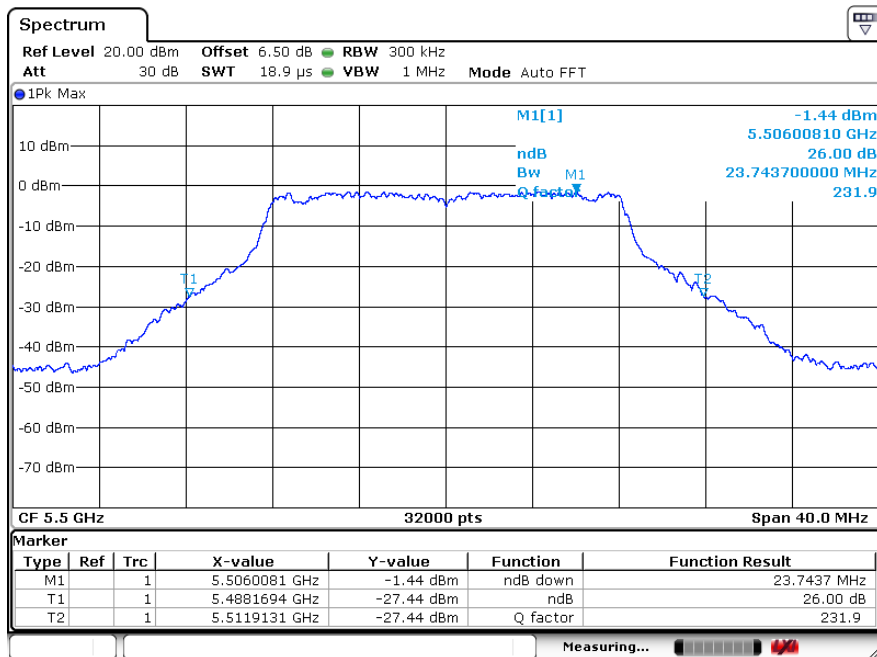


802.11a (5.47GHz-5.725GHz) The Middle Channel 120: 5600MHz

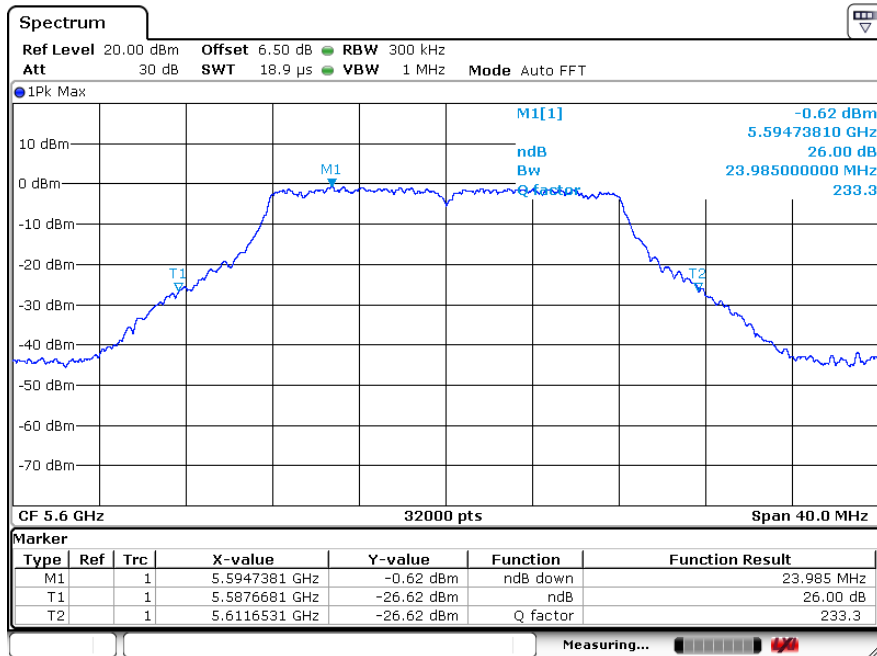


802.11a (5.47GHz-5.725GHz)
The High Channel 140: 5700MHz

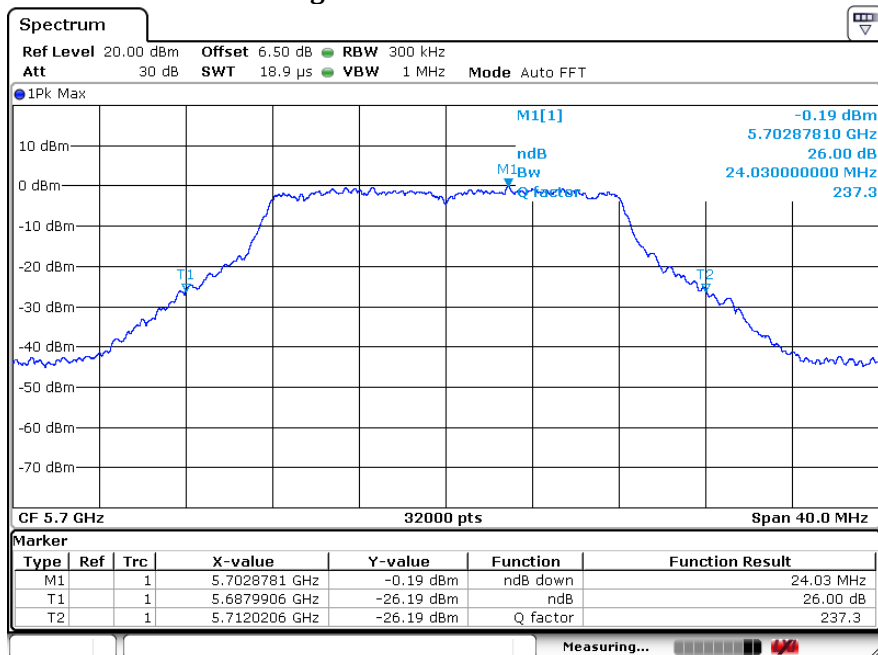


802.11n(20M) (5.47GHz-5.725GHz)
The Lowest Channel 100: 5500MHz

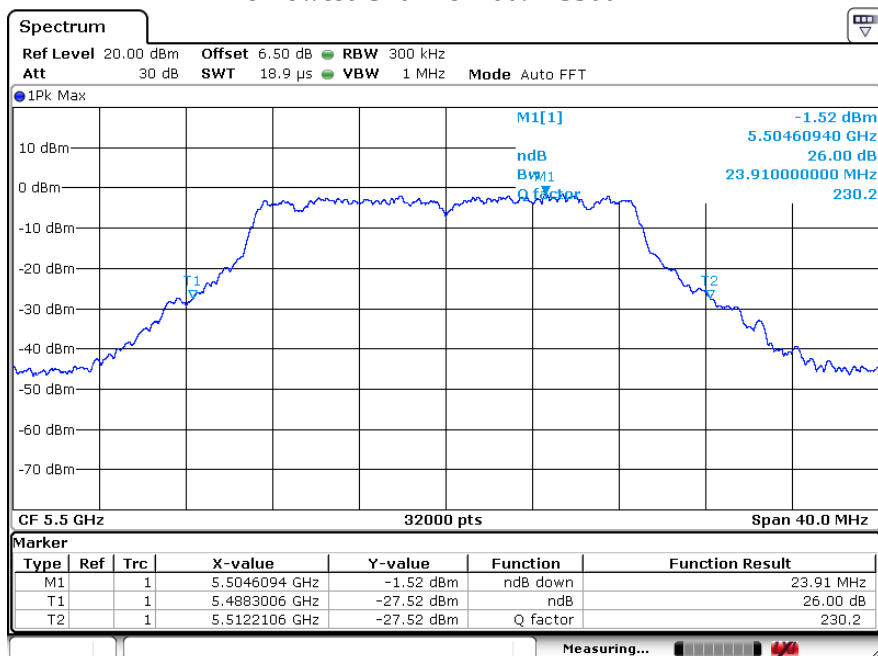


802.11n(20M) (5.47GHz-5.725GHz)
The Middle Channel 120: 5600MHz

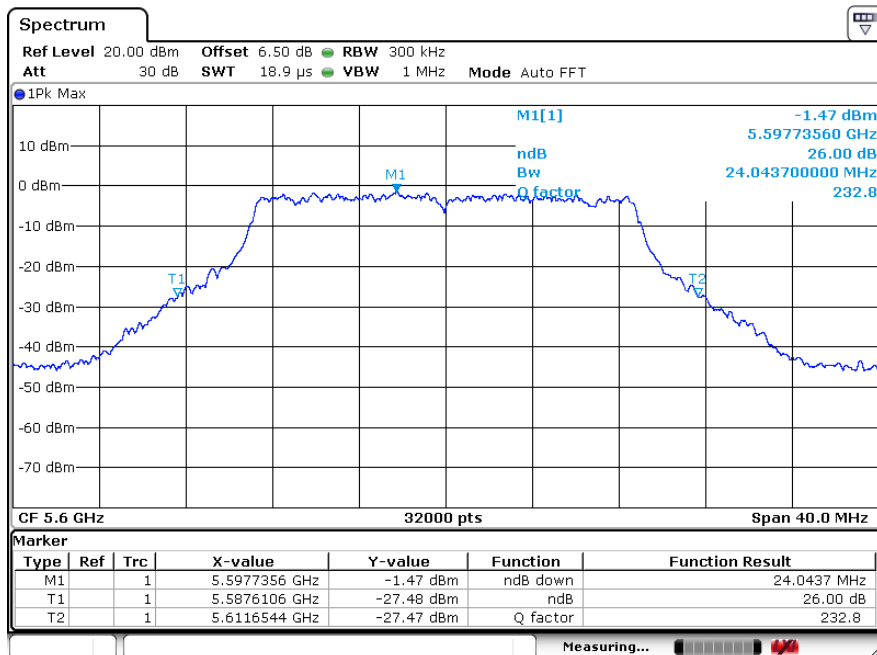


802.11n(20M) (5.47GHz-5.725GHz)
The High Channel 140: 5700MHz

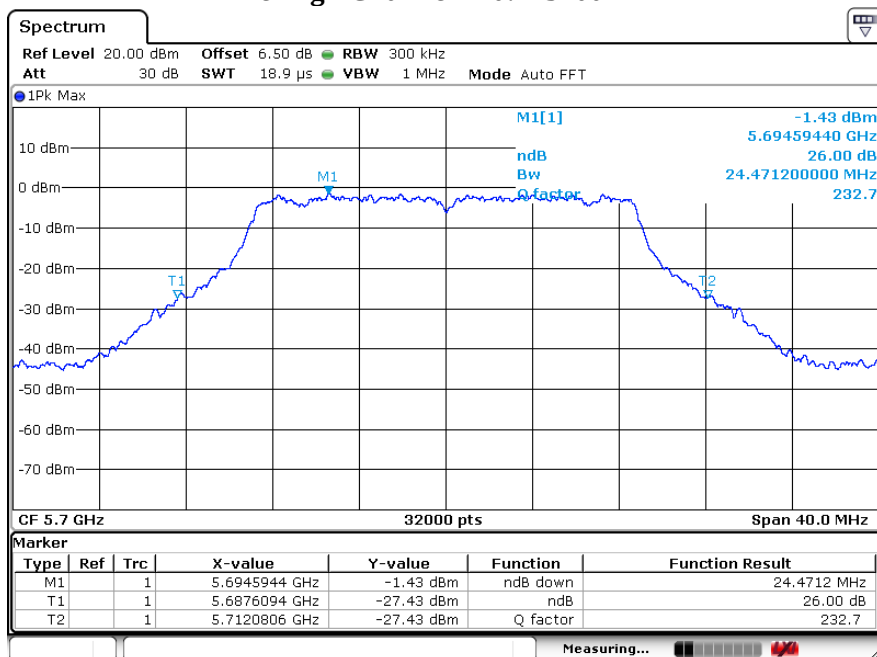


802.11ac (5.47GHz-5.725GHz) The Lowest Channel 100: 5500MHz

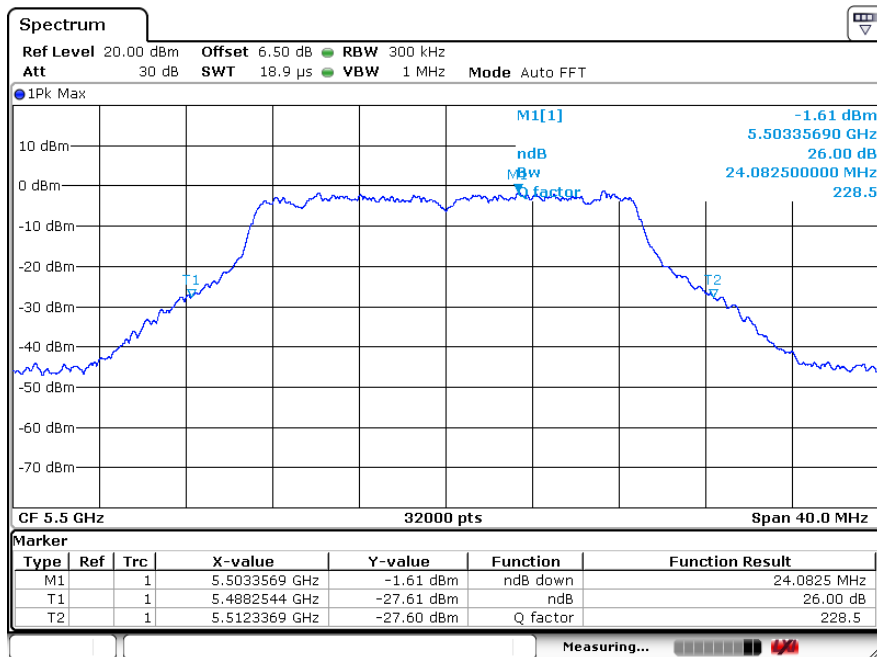


802.11ac (5.47GHz-5.725GHz) The Middle Channel 120: 5600MHz

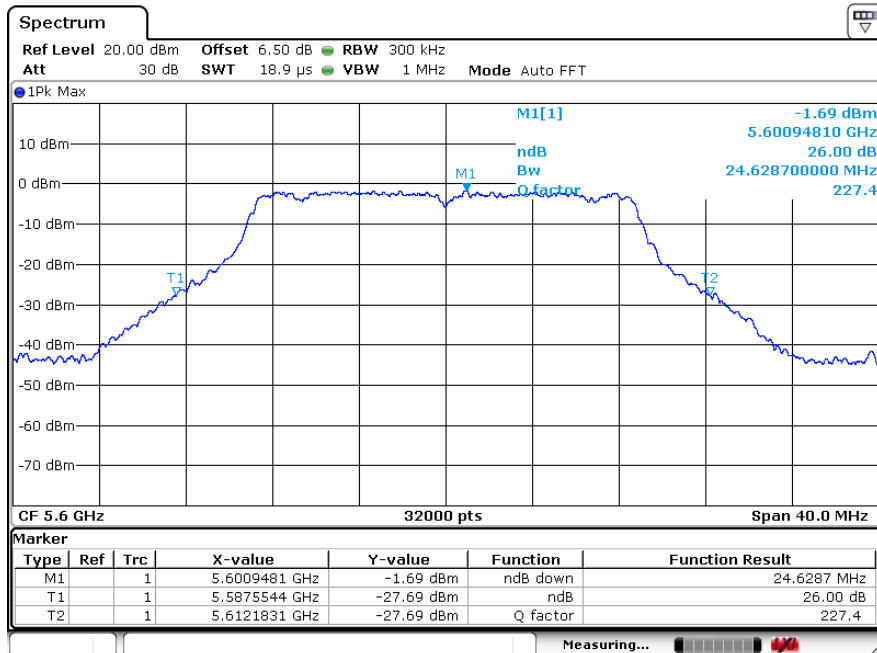


802.11ac (5.47GHz-5.725GHz) The High Channel 140: 5700MHz

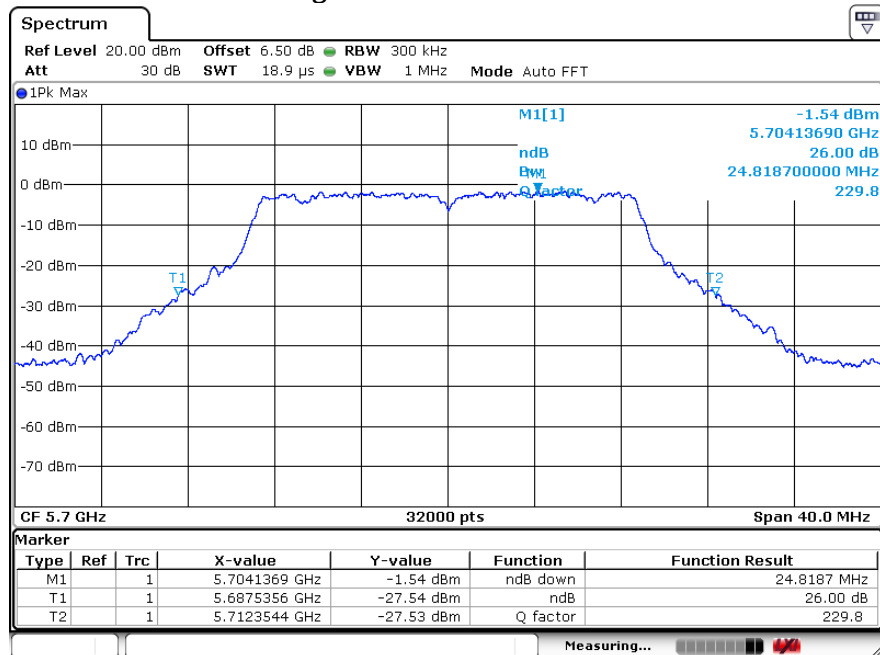


802.11n(40M) (5.47GHz-5.725GHz)
The Lowest Channel 102: 5510MHz

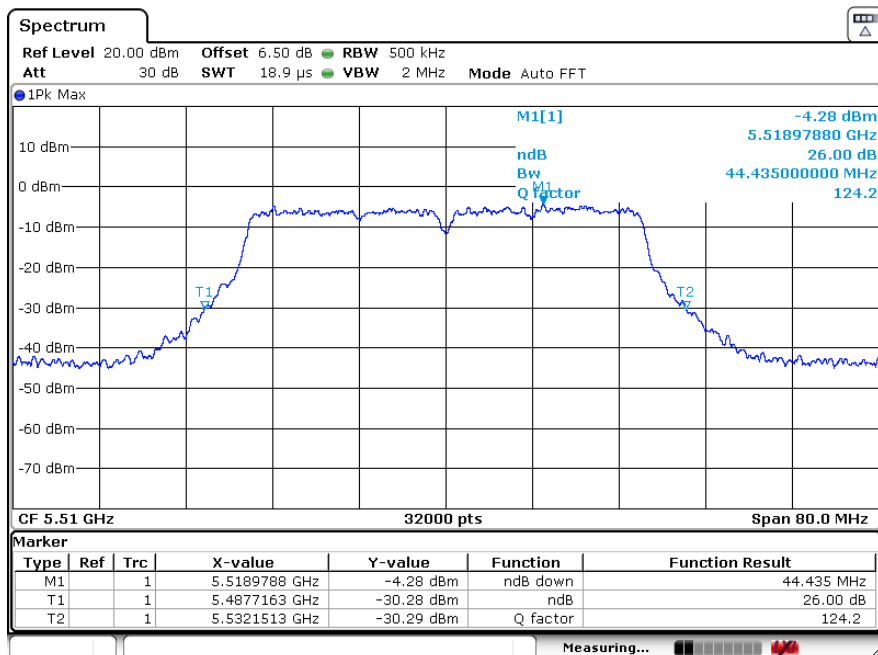


802.11n(40M) (5.47GHz-5.725GHz)
The Middle Channel 118: 5590MHz

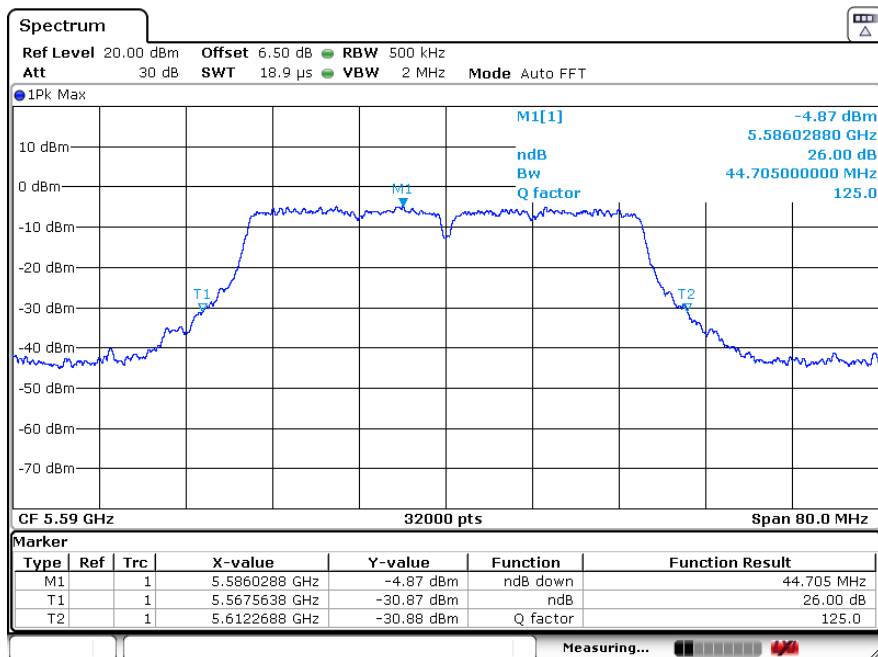


802.11n(40M) (5.47GHz-5.725GHz)
The High Channel 134: 5670MHz

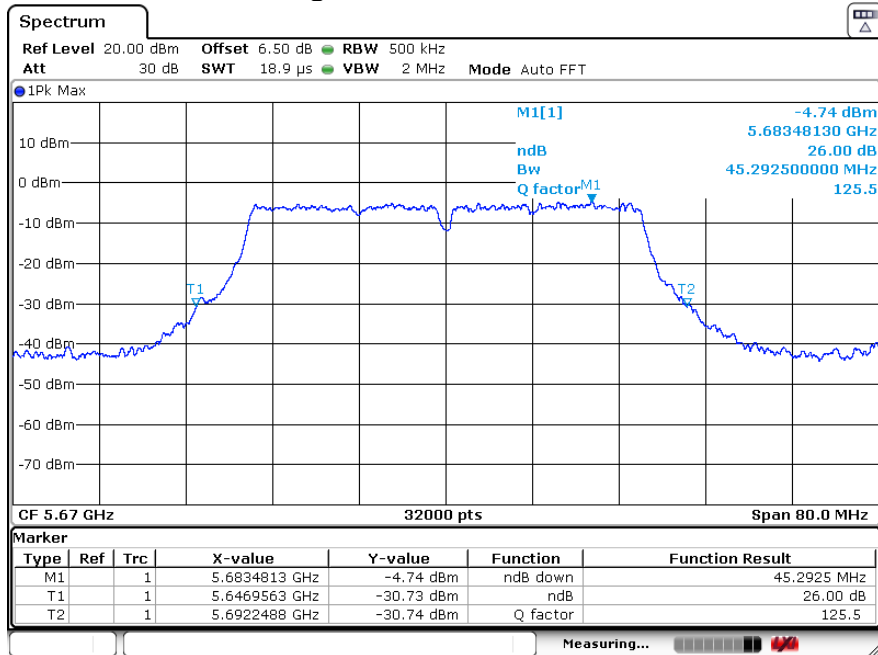


802.11ac(40M) (5.47GHz-5.725GHz)
The Lowest Channel 102: 5510MHz

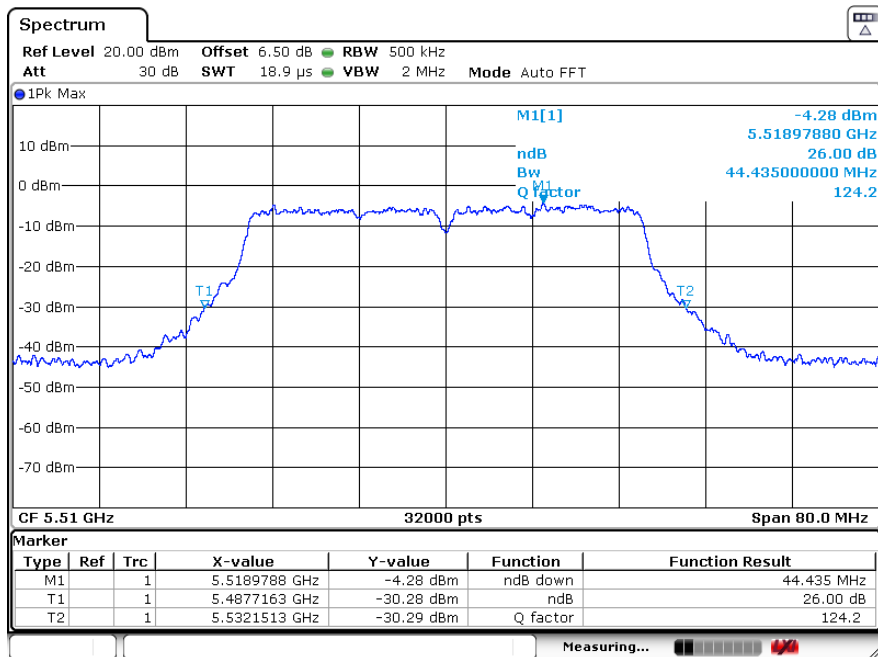


802.11ac(40M) (5.47GHz-5.725GHz)
The Middle Channel 118: 5590MHz

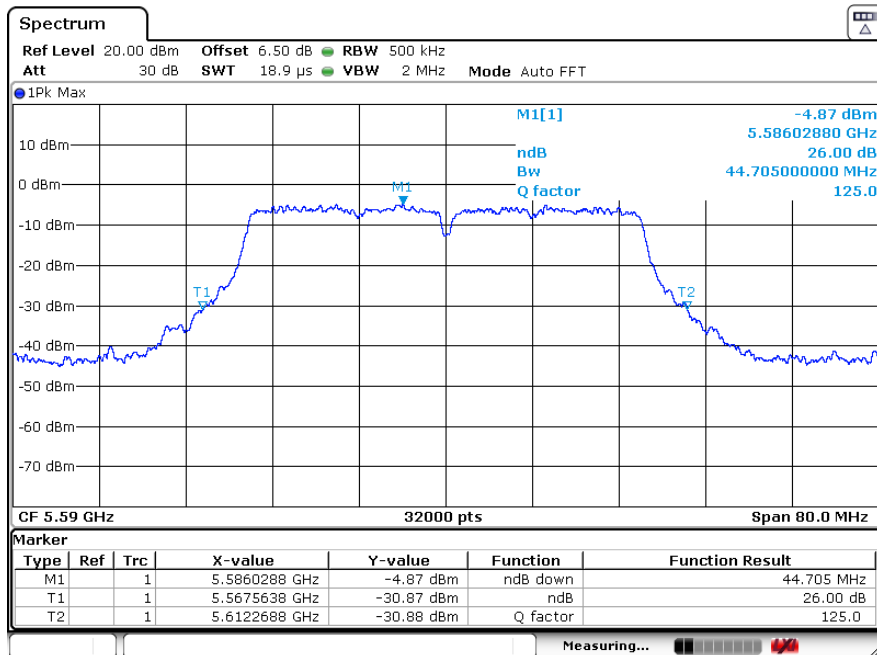

802.11ac(40M) (5.47GHz-5.725GHz)
The High Channel 134: 5670MHz

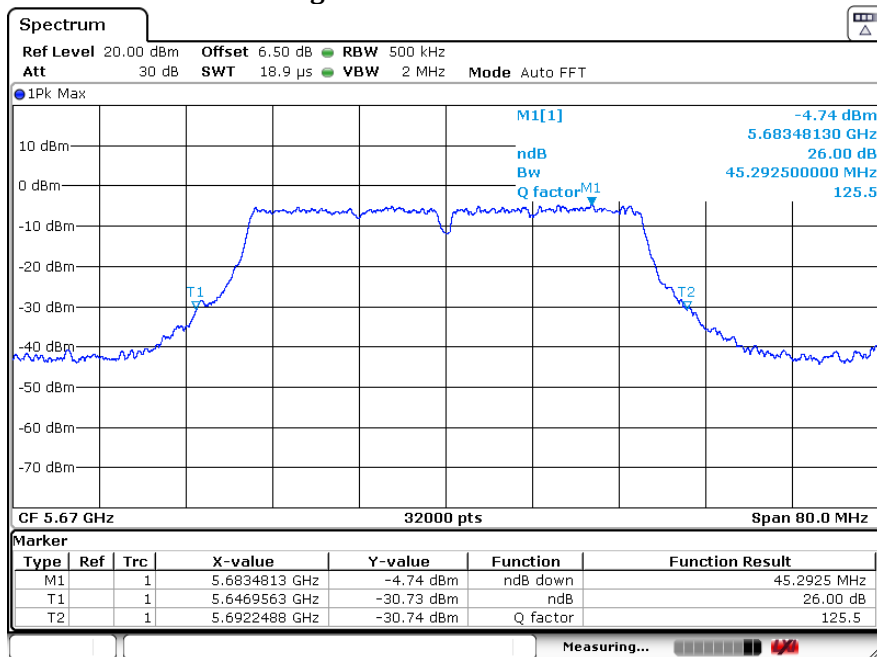

802.11ac(80M) (5.47GHz-5.725GHz)
The Lowest Channel 106: 5530MHz

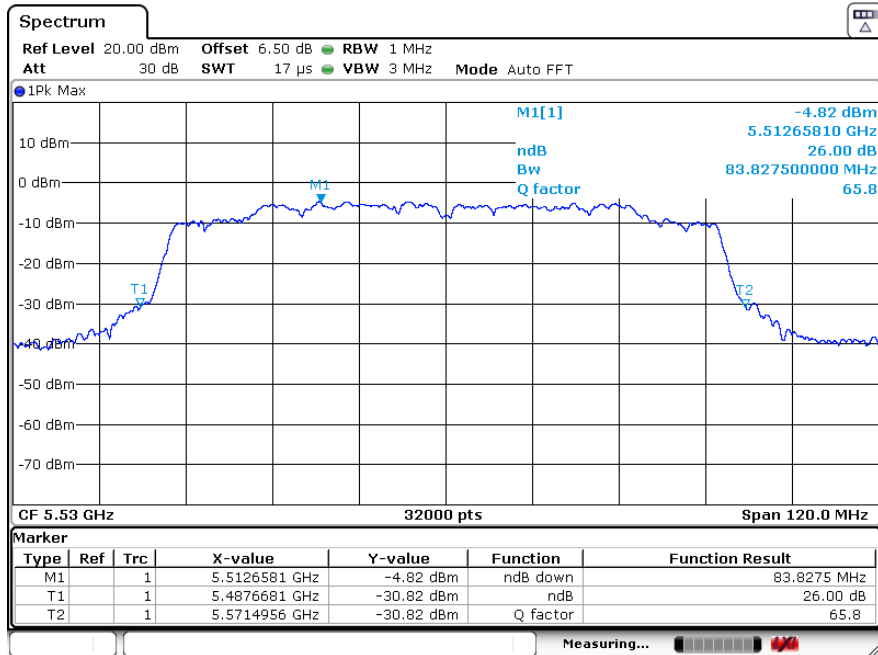

5 PEAK POWER DENSITY

5.1 APPLIED PROCEDURES / LIMIT

15.407(a) For UNII Device in the 5.15-5.25 GHz, 5.25-5.35 GHz and 5.47-5.725 GHz bands: peak power Density as follow.

Frequency Band	Limit
5.15 – 5.25 GHz	11dBm
5.25– 5.35GHz	11dBm
5.47 – 5.725 GHz	11dBm

5.2 TEST PROCEDURE

- a. The Transmitter output of EUT was connected to the spectrum analyzer.

Equipment mode: Spectrum analyzer

Detector function: Peak mode

SPAN: 40MHz

RBW: 1MHz

VBW: 3MHz

Center frequency: fundamental frequency tested.

Sweep time= 1msec.

- b. Using Peak Search to read the peak power after Maximum Hold function is completed.

5.3 DEVIATION FROM STANDARD


No deviation.

5.4 TEST RESULTS


EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	22 °C	Relative Humidity :	53%
Pressure :	1010 hPa	Test Power :	DC12V from adapter
Test Mode :	802.11a/n20/ac20/n40/ac40/ac80		
Test Date :	2020-03-12		

Test Mode	Channel	Channel Frequency (MHz)	Reading (dBm)	Limit (dBm)	Result
802.11a (5.15GHz-5.25GHz) Data rate 6Mbps	Low	5180	5.30	11	Pass
	Middle	5220	4.79	11	Pass
	Highest	5240	4.63	11	Pass
802.11n(20M) (5.15GHz-5.25GHz) Data rate 13Mbps	Low	5180	4.83	11	Pass
	Middle	5220	4.14	11	Pass
	Highest	5240	3.68	11	Pass
802.11ac(20M) (5.15GHz-5.25GHz) Data rate 13Mbps	Low	5180	4.35	11	Pass
	Middle	5220	3.68	11	Pass
	Highest	5240	4.10	11	Pass
802.11n(40M) (5.15GHz-5.25GHz) Data rate 27Mbps	Low	5190	-0.93	11	Pass
	Highest	5230	-0.61	11	Pass
802.11ac(40M) (5.15GHz-5.25GHz) Data rate 27Mbps	Low	5190	-0.04	11	Pass
	Highest	5230	-0.78	11	Pass
802.11ac(80M) (5.15GHz-5.25GHz) Data rate 58.6Mbps	---	5210	-4.46	11	Pass


802.11a (5.15GHz-5.25GHz)
The Lowest Channel 36: 5180MHz

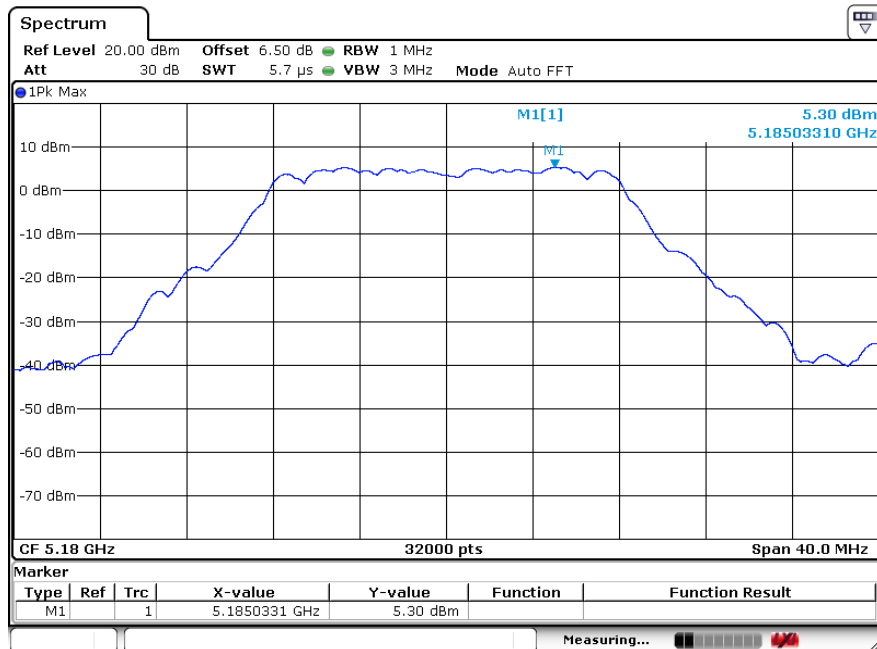


802.11a (5.15GHz-5.25GHz)
The Middle Channel 44: 5220MHz

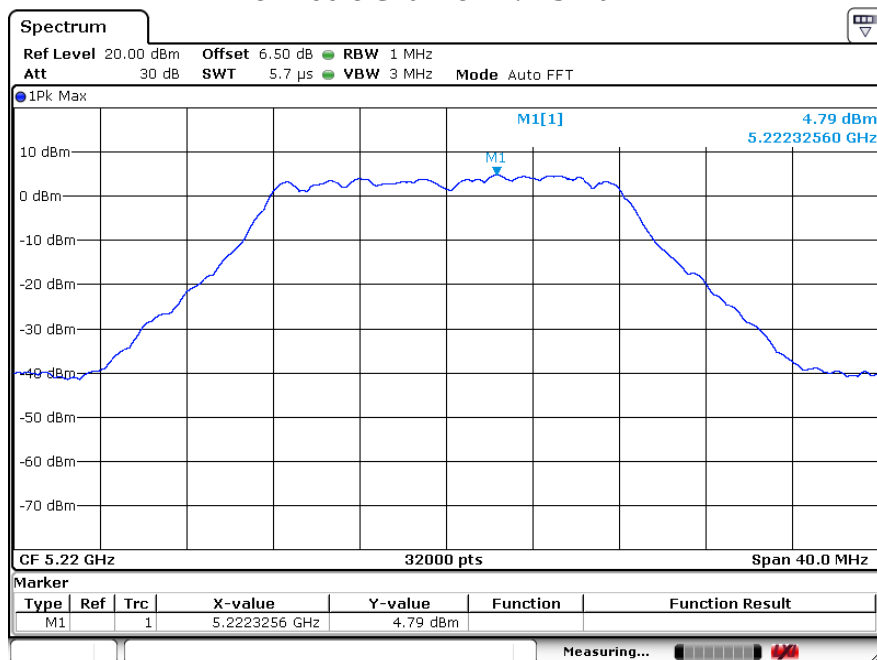


802.11a (5.15GHz-5.25GHz)
The Highest Channel 48: 5240MHz

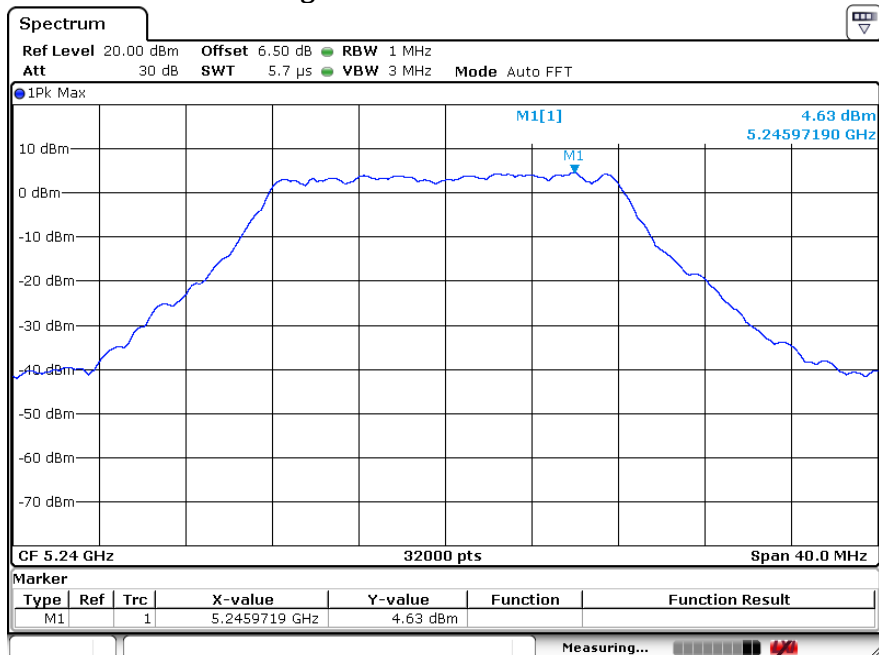


802.11n(20M) (5.15GHz-5.25GHz)
The Lowest Channel 36: 5180MHz

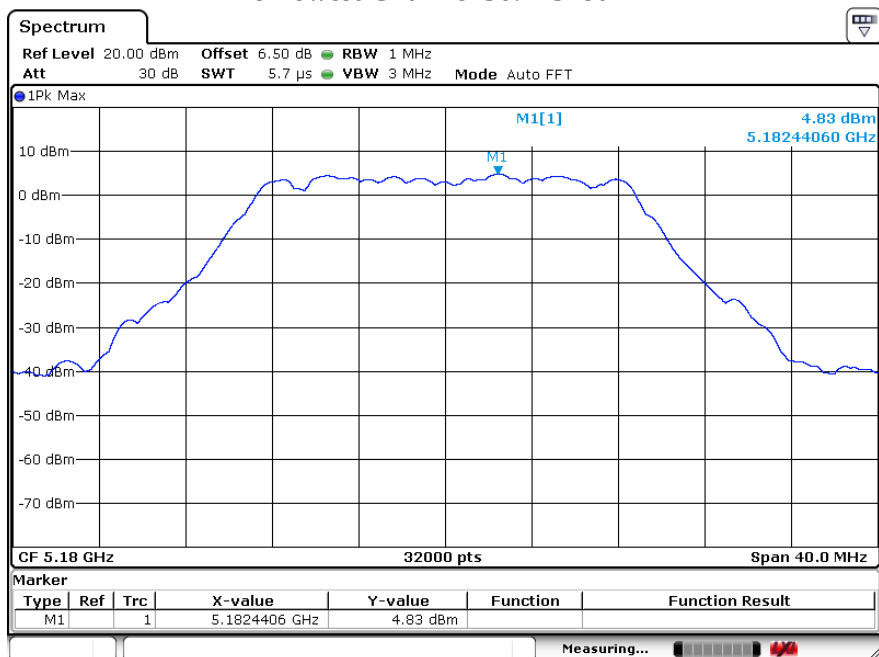


802.11n(20M) (5.15GHz-5.25GHz) The Middle Channel 44: 5220MHz

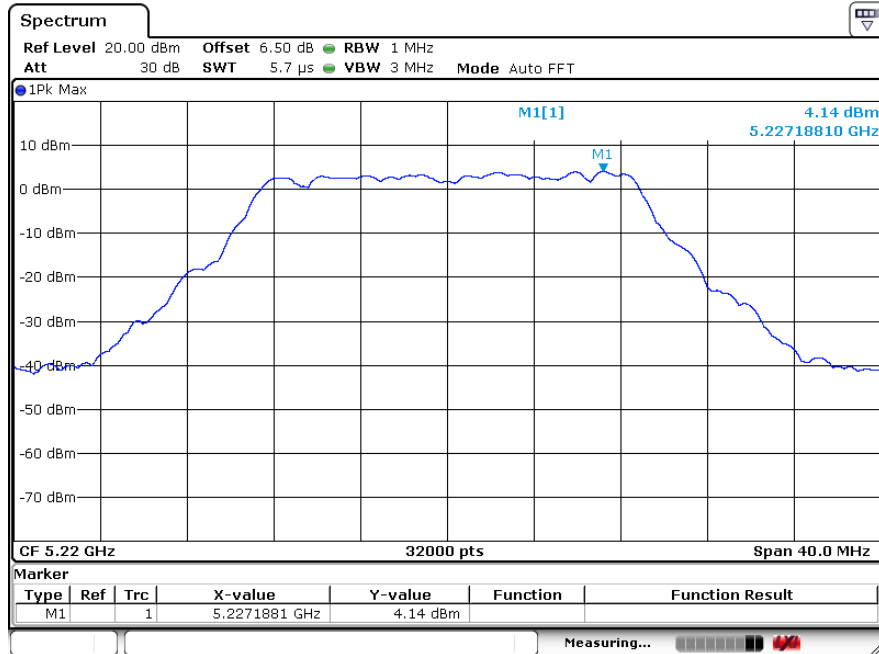


802.11n(20M) (5.15GHz-5.25GHz) The Highest Channel 48: 5240MHz

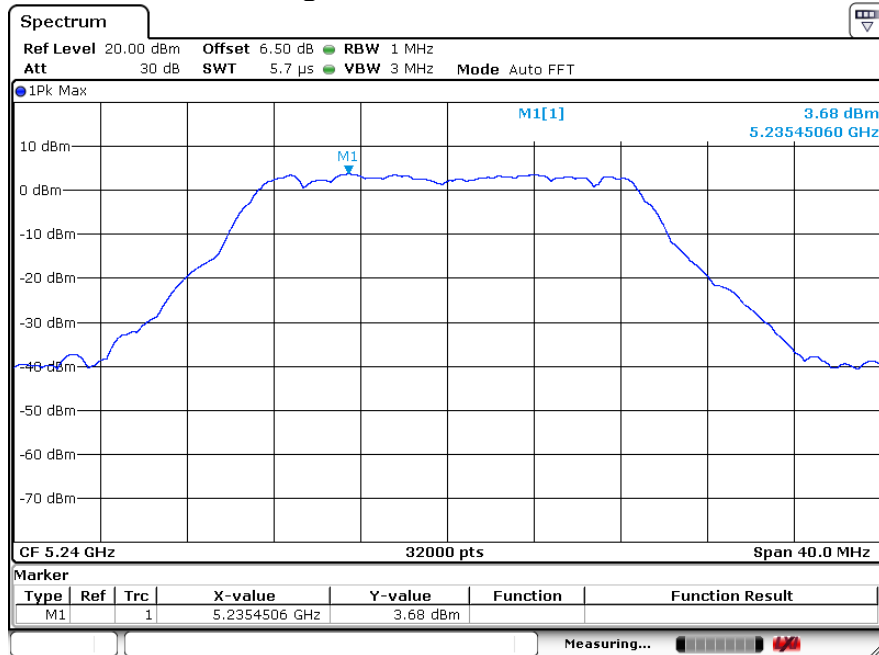


802.11ac (5.15GHz-5.25GHz)
The Lowest Channel 36: 5180MHz

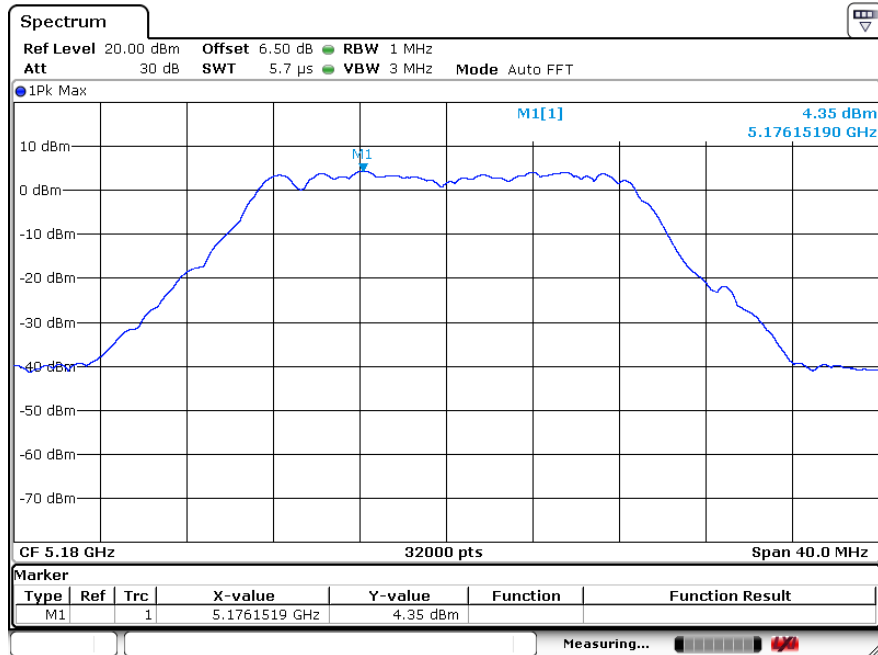


802.11ac (5.15GHz-5.25GHz)
The Middle Channel 44: 5220MHz

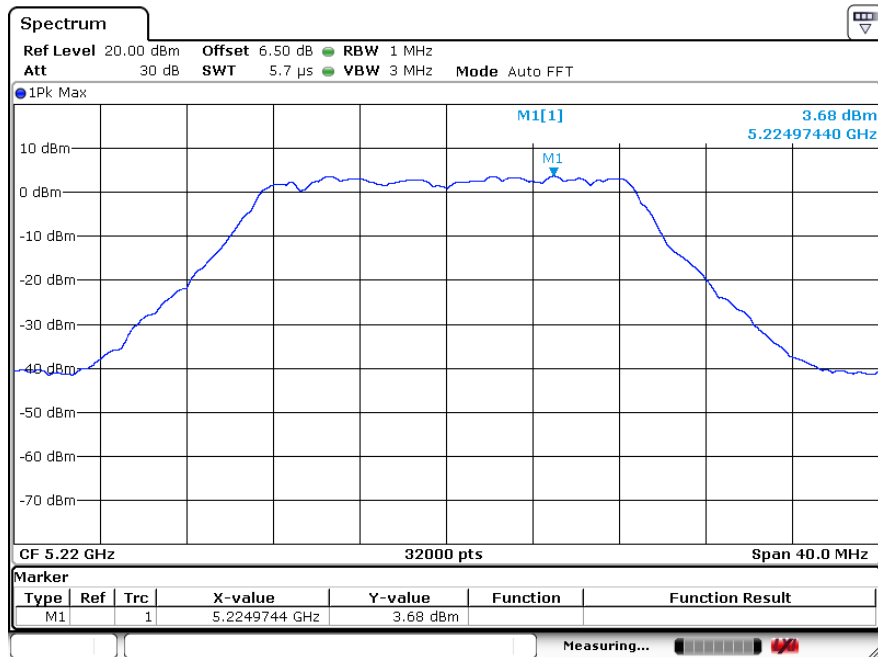


802.11ac (5.15GHz-5.25GHz) The Highest Channel 48: 5240MHz

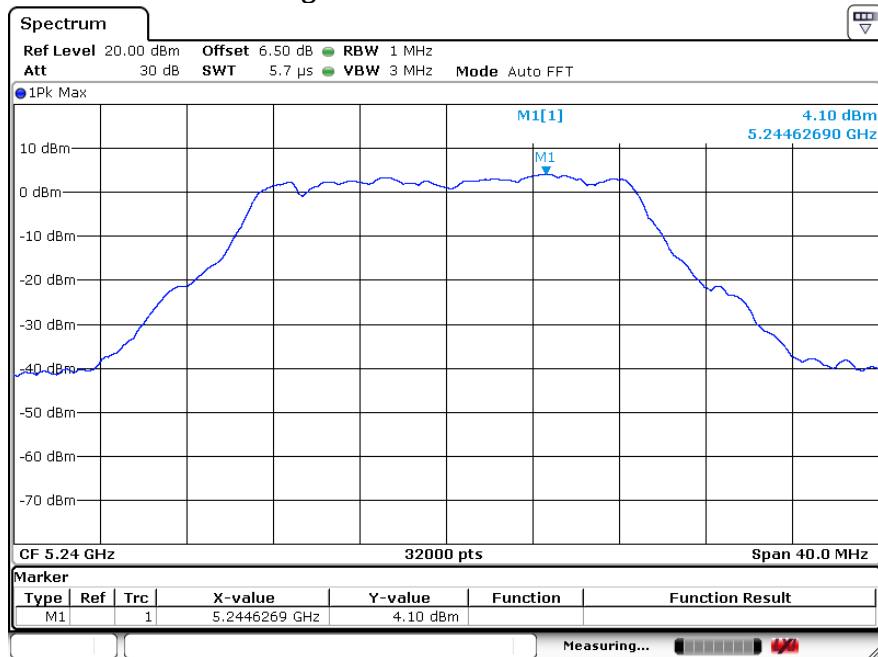


802.11n(40M) (5.15GHz-5.25GHz) The Lowest Channel 38: 5190MHz

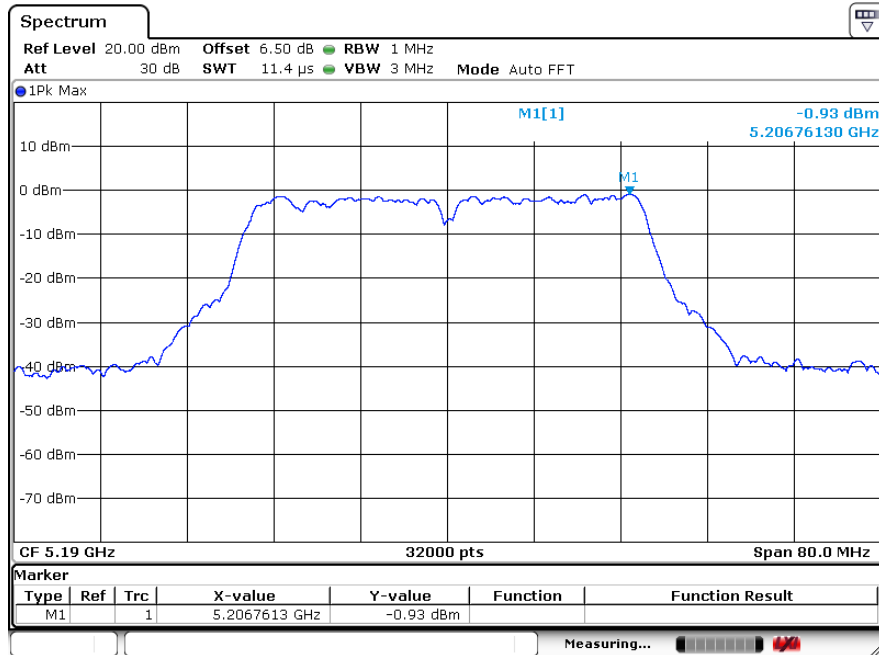


802.11n(40M) (5.15GHz-5.25GHz) The Highest Channel 46: 5230MHz

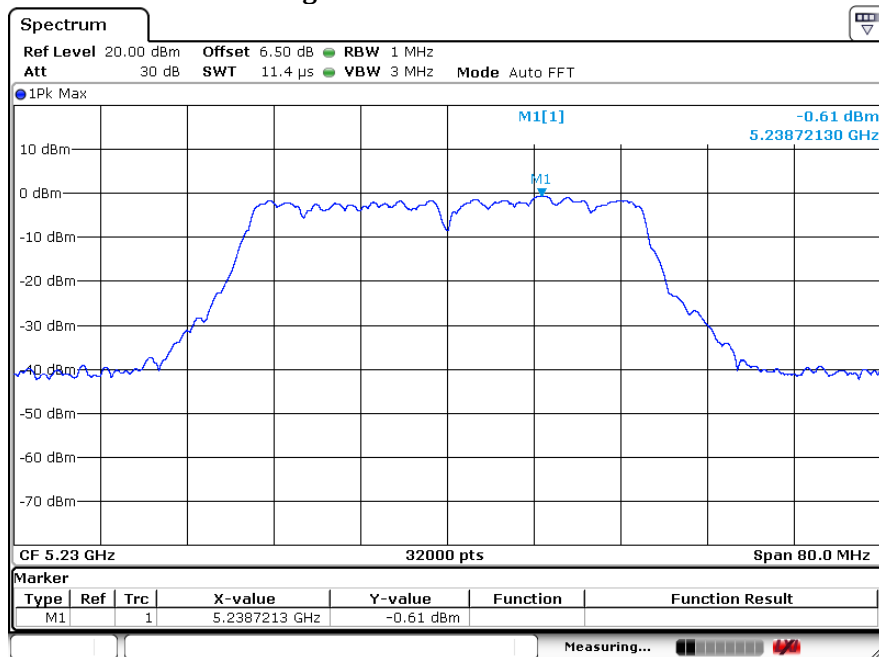


802.11ac(40M) (5.15GHz-5.25GHz)
The Lowest Channel 38: 5190MHz

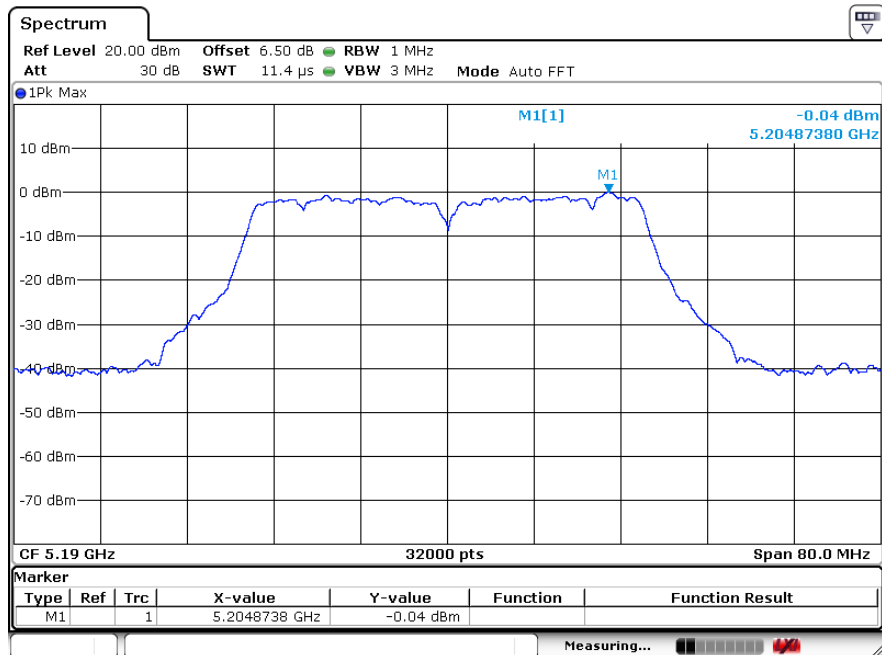

802.11ac(40M) (5.15GHz-5.25GHz)
The Highest Channel 46: 5230MHz

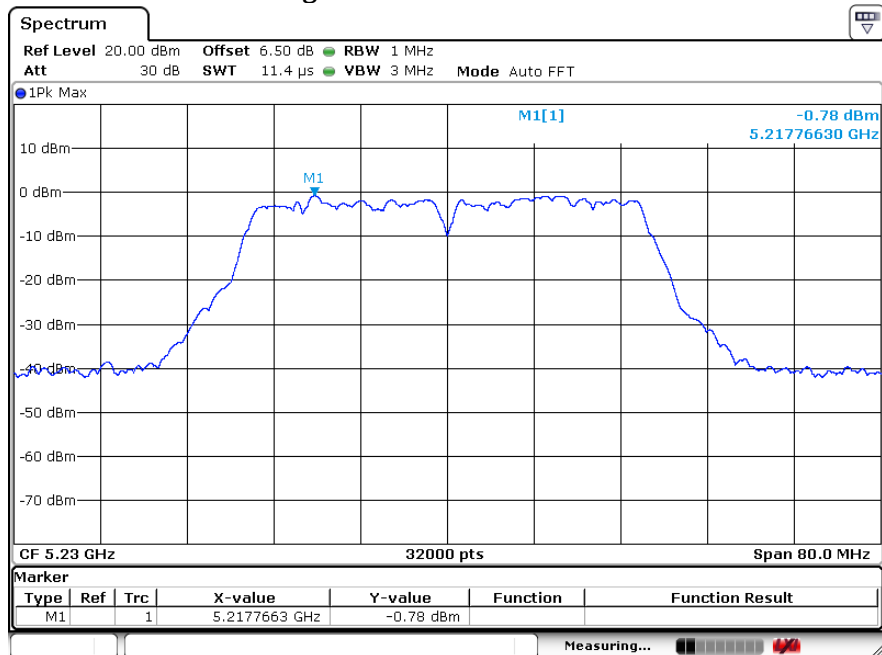


802.11ac(80M) (5.15GHz-5.25GHz) The Lowest Channel 42: 5210MHz

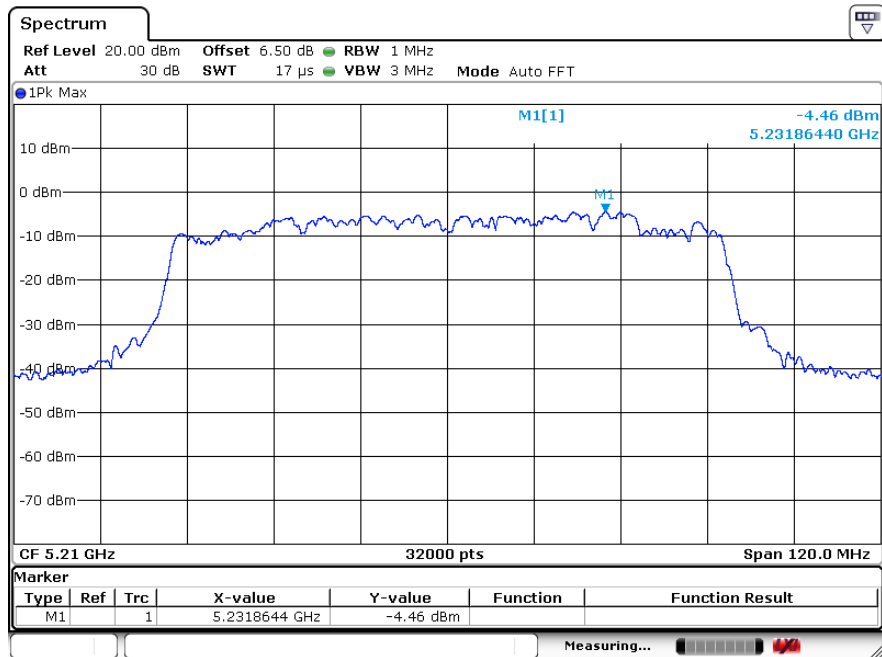


EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	22 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11a/n20/ac20/n40/ac40/ac80		
Test Date :	2020-03-12		

Test Mode	Channel	Channel Frequency (MHz)	Reading (dBm)	Limit (dBm)	Result
802.11a (5.25GHz-5.35GHz) Data rate 6Mbps	Low	5260	4.66	11	Pass
	Middle	5280	4.81	11	Pass
	Highest	5320	4.99	11	Pass
802.11n(20M) (5.25GHz-5.35GHz) Data rate 13Mbps	Low	5260	4.43	11	Pass
	Middle	5280	4.01	11	Pass
	Highest	5320	4.58	11	Pass
802.11ac(20M) (5.25GHz-5.35GHz) Data rate 13Mbps	Low	5260	3.74	11	Pass
	Middle	5280	3.75	11	Pass
	Highest	5320	4.12	11	Pass
802.11n(40M) (5.25GHz-5.35GHz) Data rate 27Mbps	Low	5270	-0.20	11	Pass
	Highest	5310	-0.56	11	Pass
802.11ac(40M) (5.25GHz-5.35GHz) Data rate 27Mbps	Low	5270	-0.87	11	Pass
	Highest	5310	-0.94	11	Pass
802.11ac(80M) (5.25GHz-5.35GHz) Data rate 58.6Mbps	---	5290	--4.70	11	Pass


802.11a (5.25GHz-5.35GHz)
The Lowest Channel 52: 5260MHz

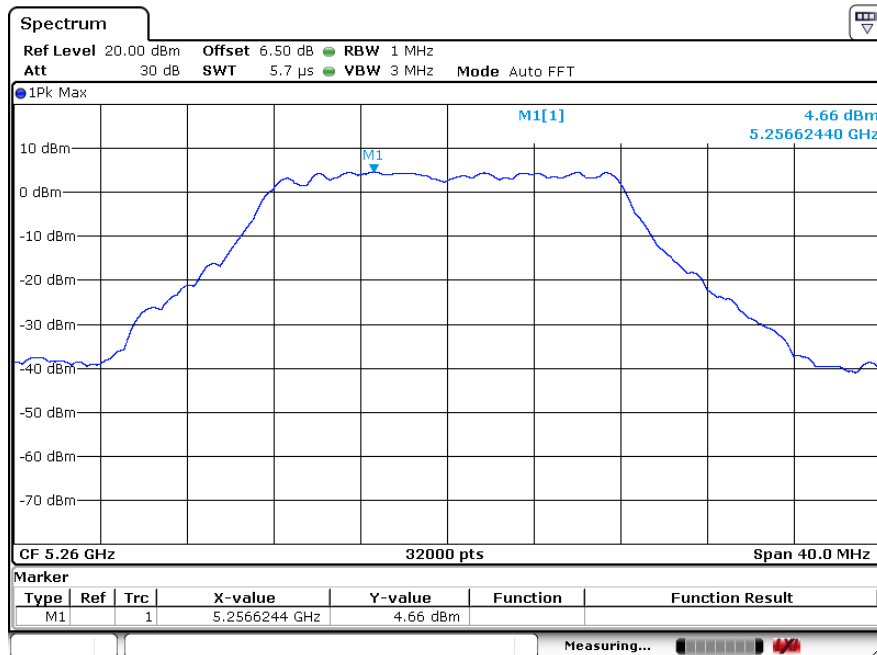


802.11a (5.25GHz-5.35GHz)
The Middle Channel 56: 5280MHz

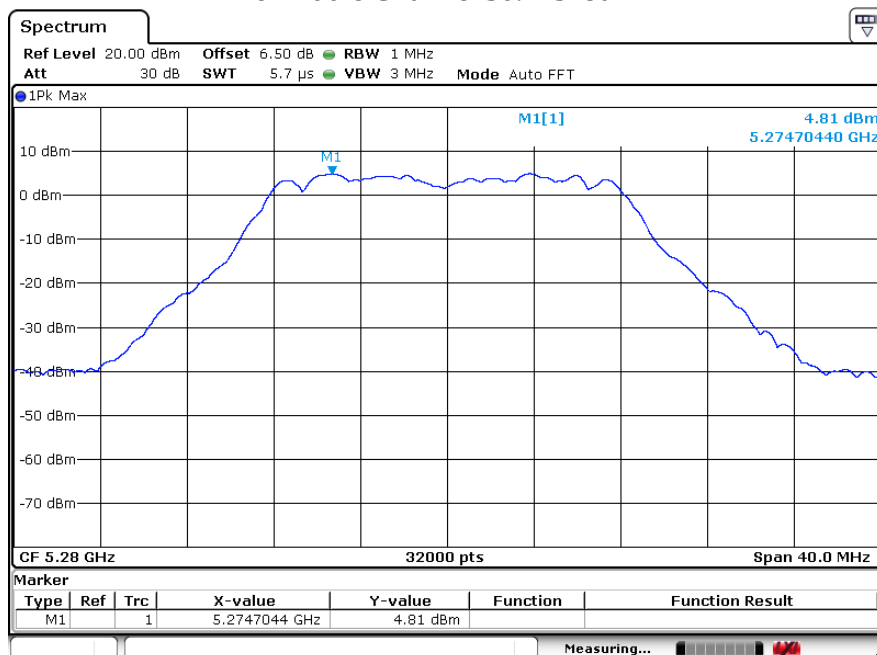


802.11a (5.25GHz-5.35GHz)
The Highest Channel 64: 5320MHz

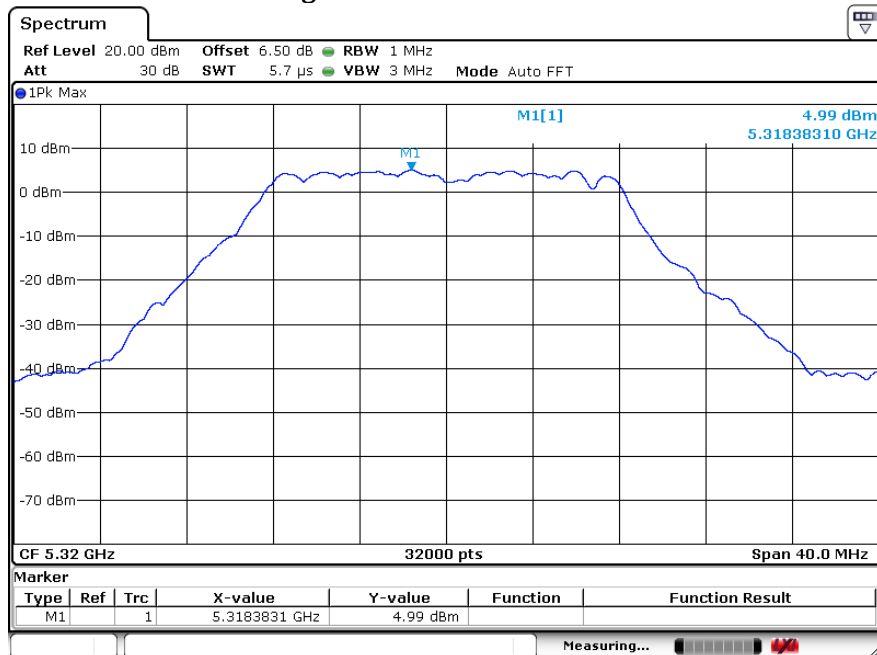


802.11n(20M) (5.25GHz-5.35GHz)
The Lowest Channel 52: 5260MHz

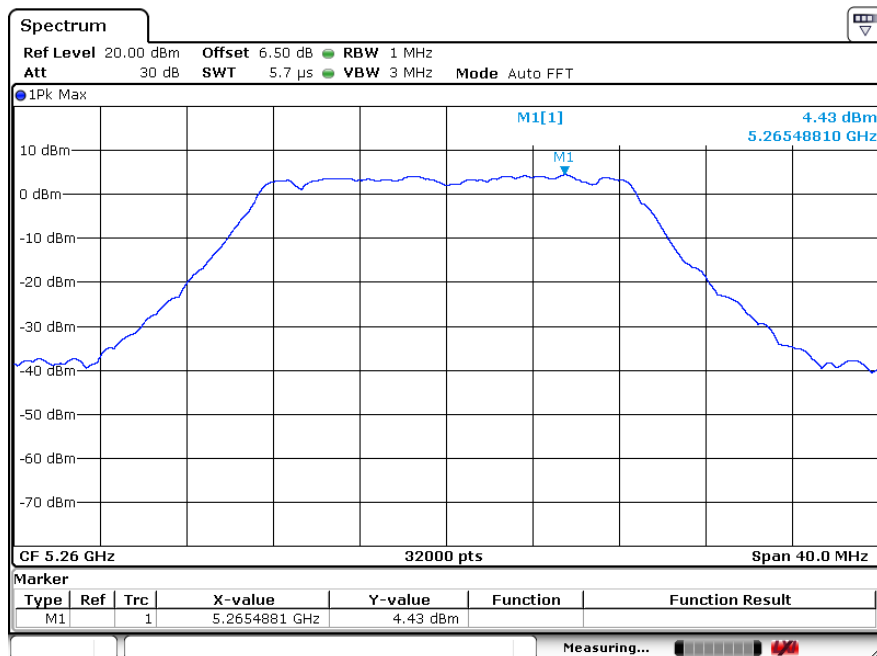


802.11n(20M) (5.25GHz-5.35GHz) The Middle Channel 56: 5280MHz

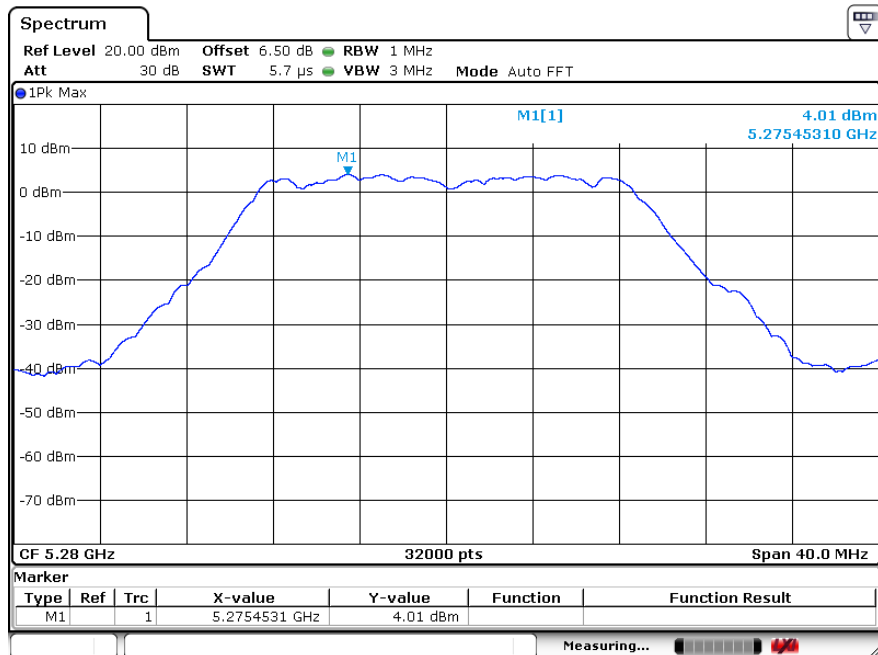


802.11n(20M) (5.25GHz-5.35GHz) The Highest Channel 64: 5320MHz

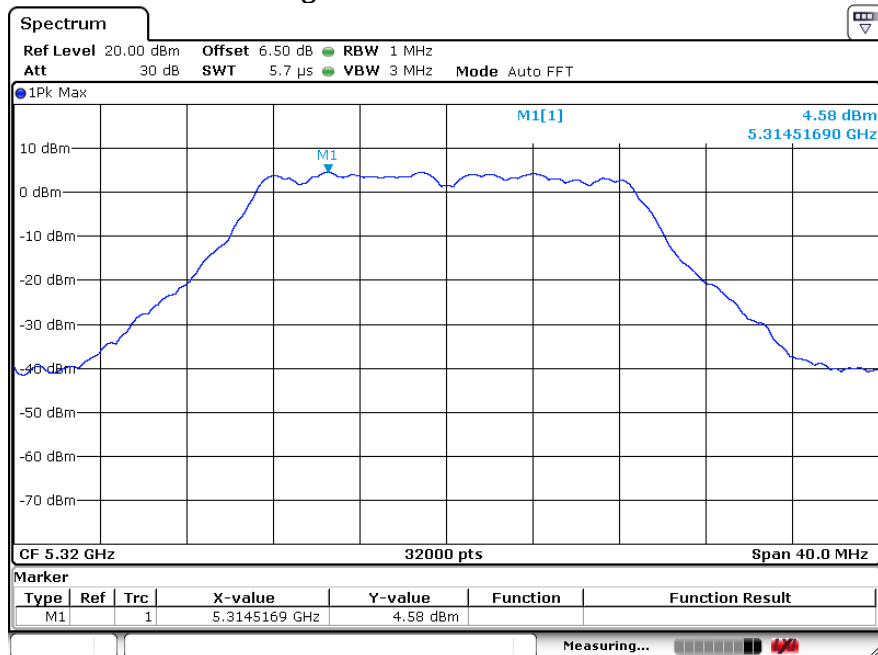


802.11ac (5.25GHz-5.35GHz)
The Lowest Channel 52: 5260MHz

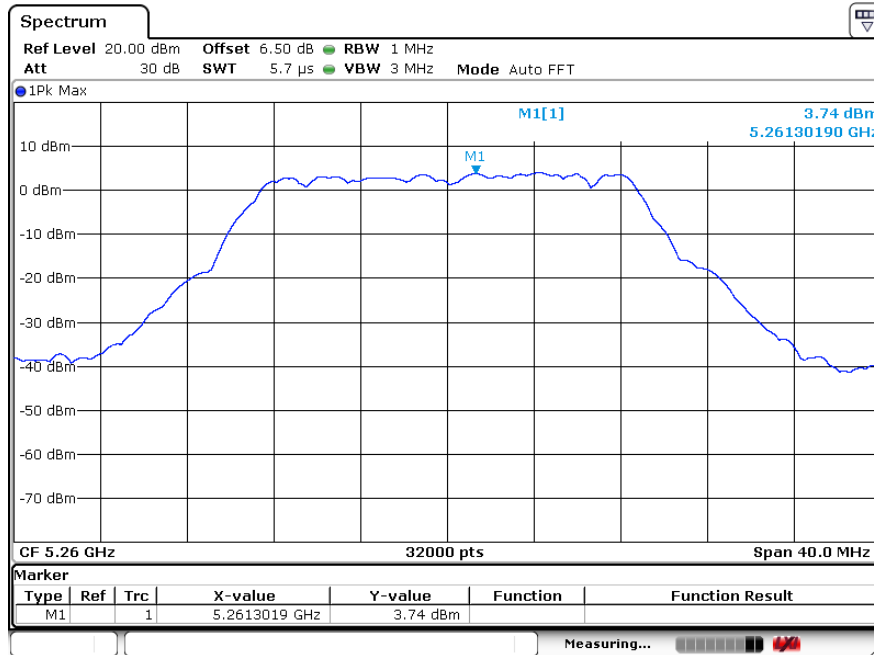


802.11ac (5.25GHz-5.35GHz)
The Middle Channel 56: 5280MHz

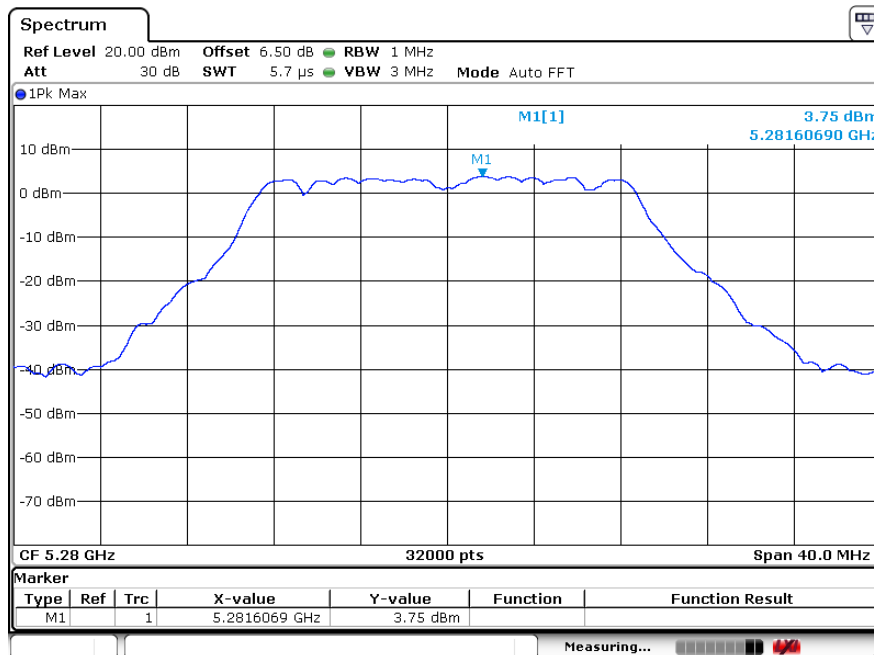


802.11ac (5.25GHz-5.35GHz) The Highest Channel 64: 5320MHz

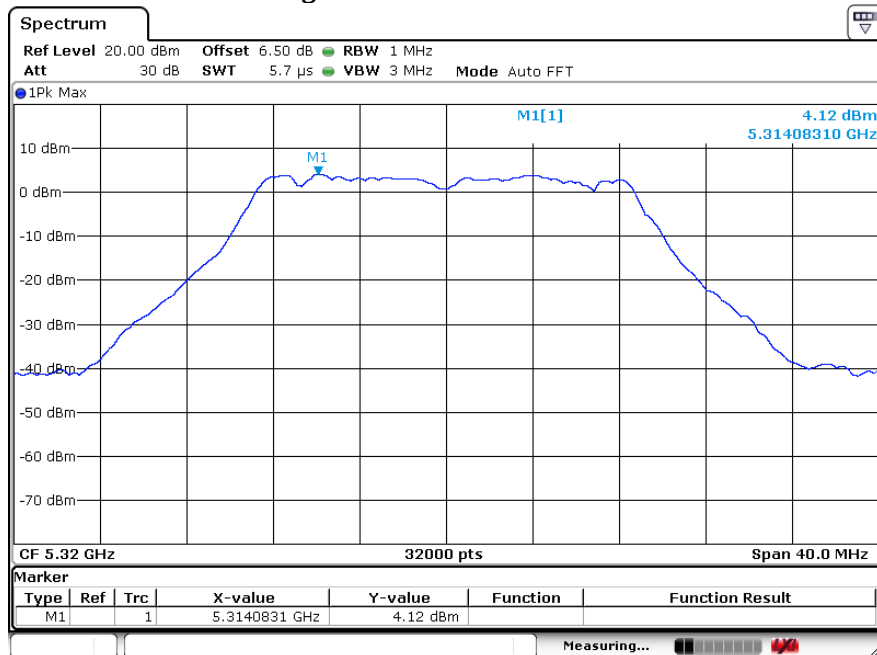


802.11n(40M) (5.25GHz-5.35GHz)
The Lowest Channel 54: 5270MHz

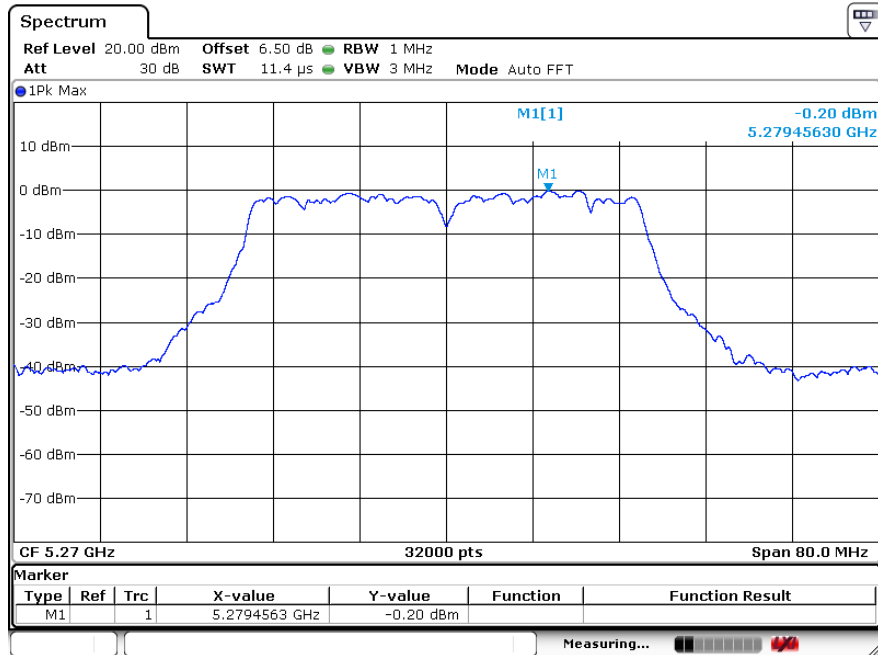


802.11n(40M) (5.25GHz-5.35GHz)
The Highest Channel 62: 5310MHz

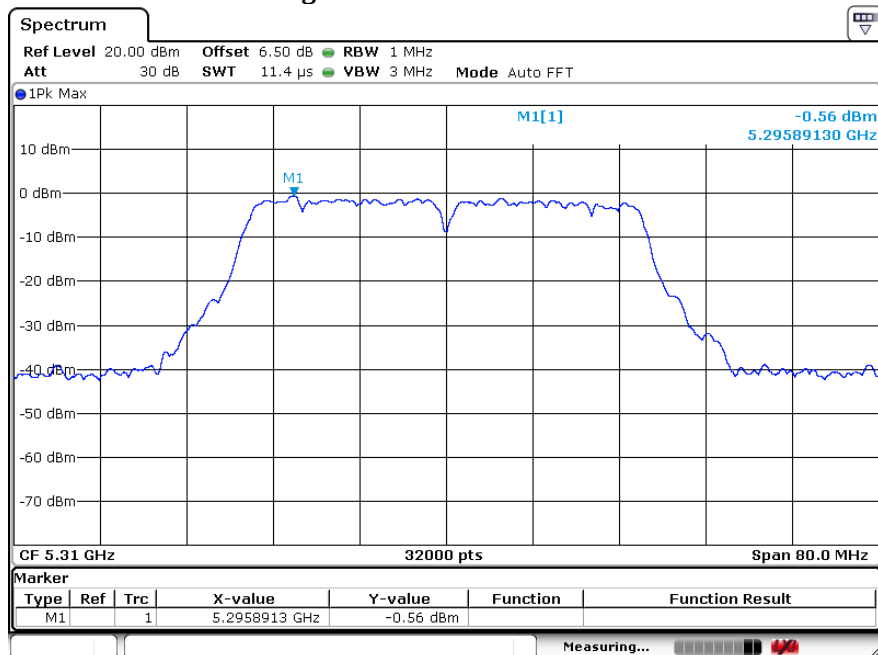


802.11ac(40M) (5.25GHz-5.35GHz)
The Lowest Channel 54: 5270MHz

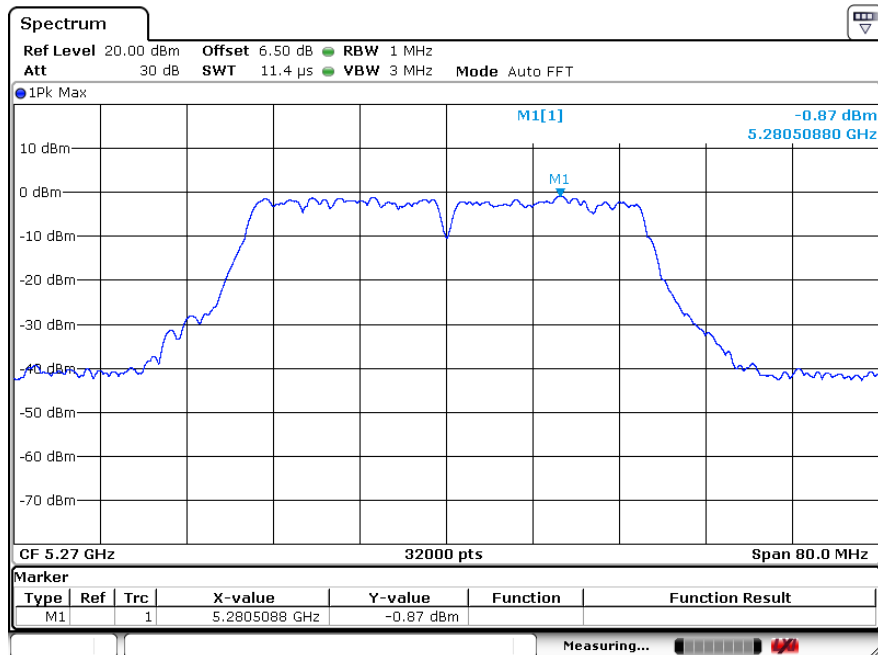

802.11ac(40M) (5.25GHz-5.35GHz)
The Highest Channel 62: 5310MHz

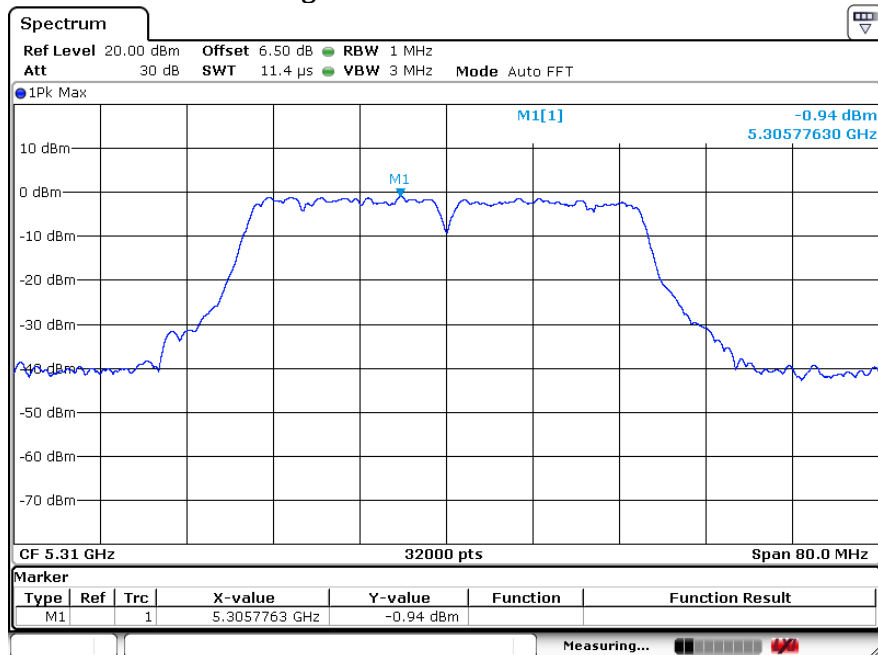


802.11ac(80M) (5.25GHz-5.35GHz)
Channel 58: 5290MHz

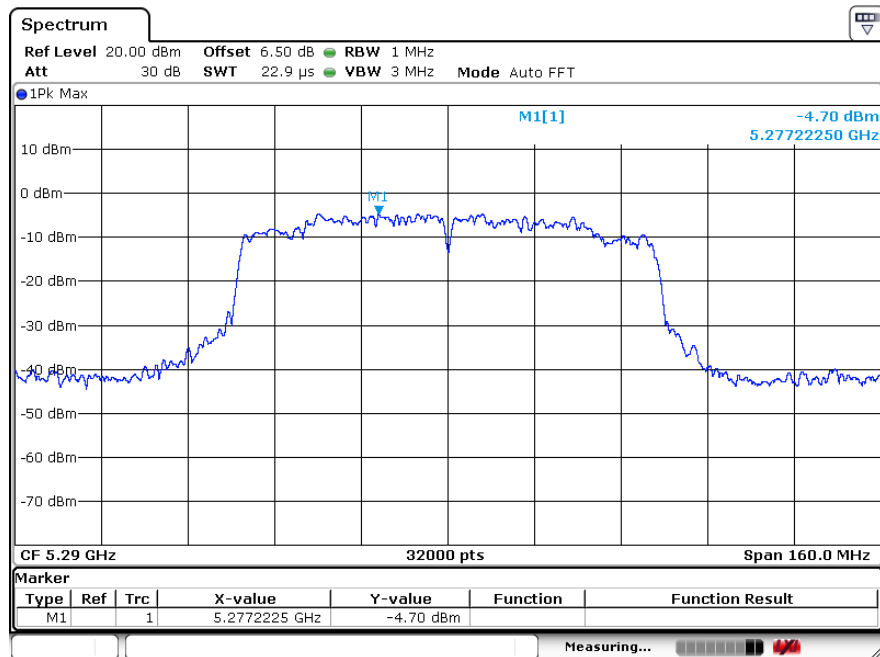


EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	22 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11a/n20/ac20/n40/ac40/ac80		
Test Date :	2020-03-12		

Test Mode	Channel	Channel Frequency (MHz)	Reading (dBm)	Limit (dBm)	Result
802.11a (5.47GHz-5.725GHz) Data rate 6Mbps	Low	5500	4.59	11	Pass
	Middle	5600	4.92	11	Pass
	Highest	5700	4.73	11	Pass
802.11n(20M) (5.47GHz-5.725GHz) Data rate 13Mbps	Low	5500	3.88	11	Pass
	Middle	5600	3.79	11	Pass
	Highest	5700	3.94	11	Pass
802.11ac(20M) (5.47GHz-5.725GHz) Data rate 13Mbps	Low	5500	3.49	11	Pass
	Middle	5600	4.17	11	Pass
	Highest	5700	3.50	11	Pass
802.11n(40M) (5.47GHz-5.725GHz) Data rate 27Mbps	Low	5510	-0.77	11	Pass
	Middle	5590	-1.17	11	Pass
	Highest	5670	-0.82	11	Pass
802.11ac(40M) (5.47GHz-5.725GHz) Data rate 27Mbps	Low	5510	-1.07	11	Pass
	Middle	5590	-0.99	11	Pass
	Highest	5670	-0.35	11	Pass
802.11ac(80M) (5.47GHz-5.725GHz) Data rate 58.6Mbps	---	5530	-4.40	11	Pass


802.11a (5.47GHz-5.725GHz) The Lowest Channel 100: 5500MHz

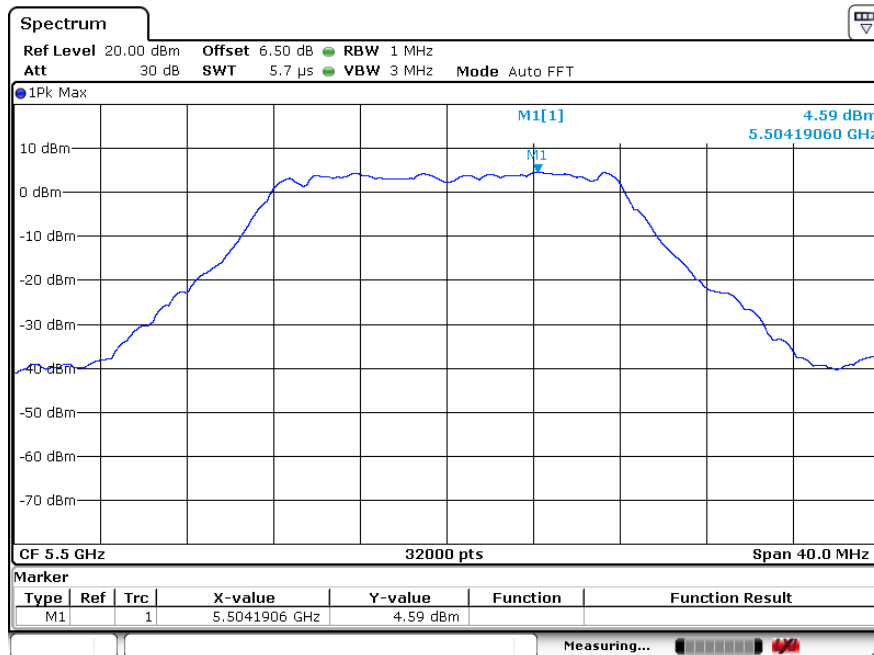


802.11a (5.47GHz-5.725GHz) The Middle Channel 120: 5600MHz

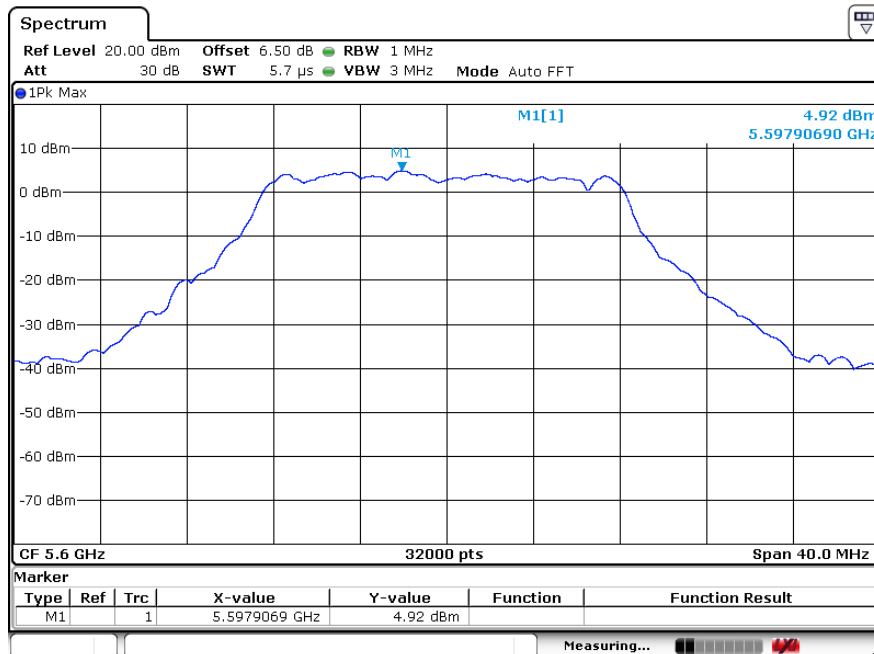


802.11a (5.47GHz-5.725GHz) The Highest Channel 140: 5700MHz

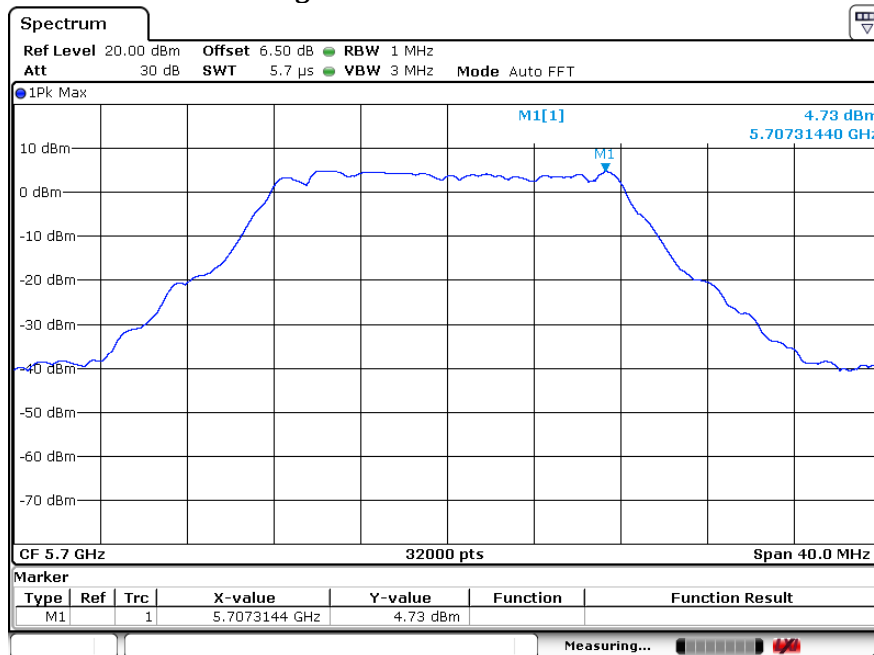


802.11n(20M) (5.47GHz-5.725GHz) The Lowest Channel 100: 5500MHz

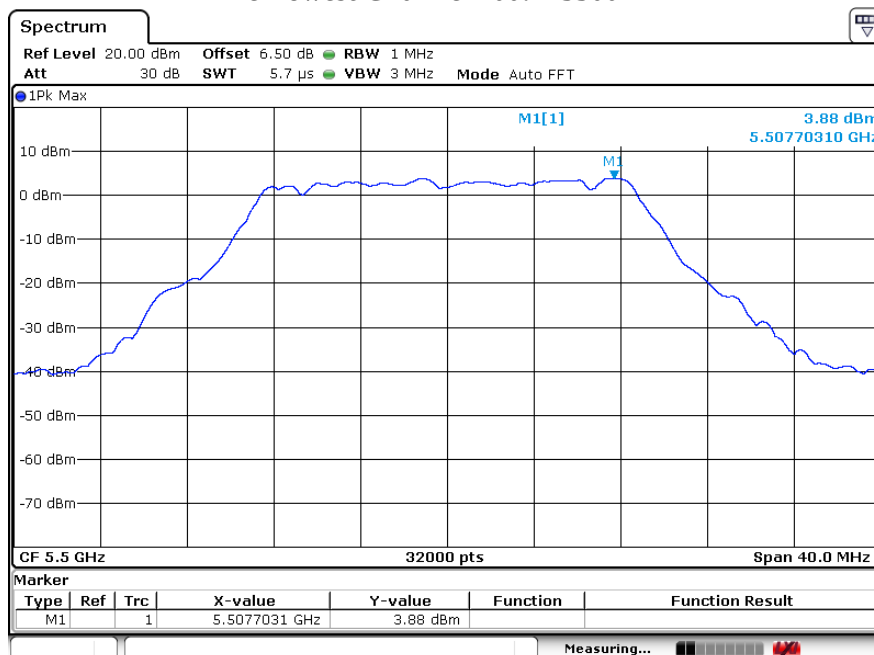


802.11n(20M) (5.47GHz-5.725GHz)
The Middle Channel 120: 5600MHz

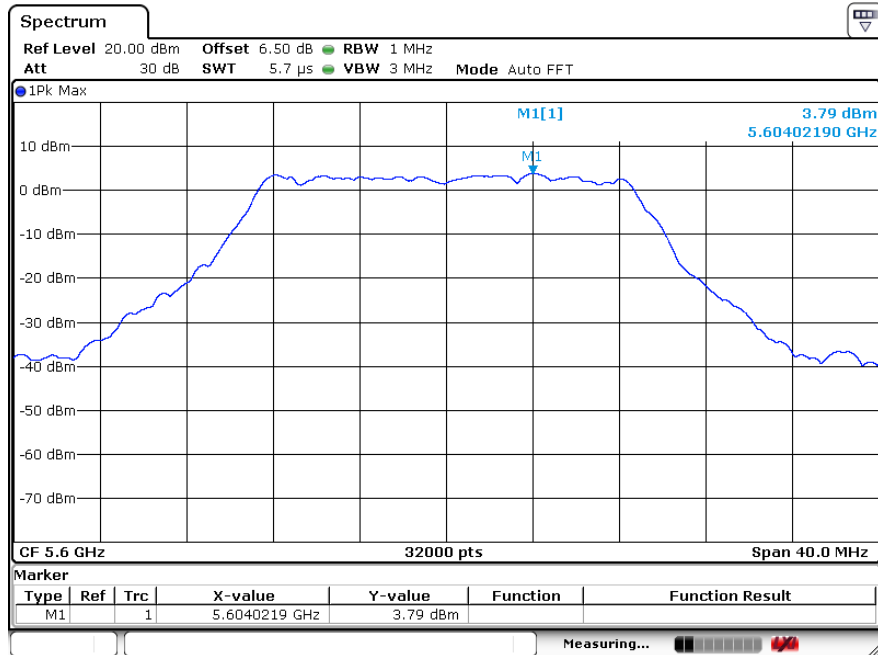


802.11n(20M) (5.47GHz-5.725GHz)
The Highest Channel 140: 5700MHz

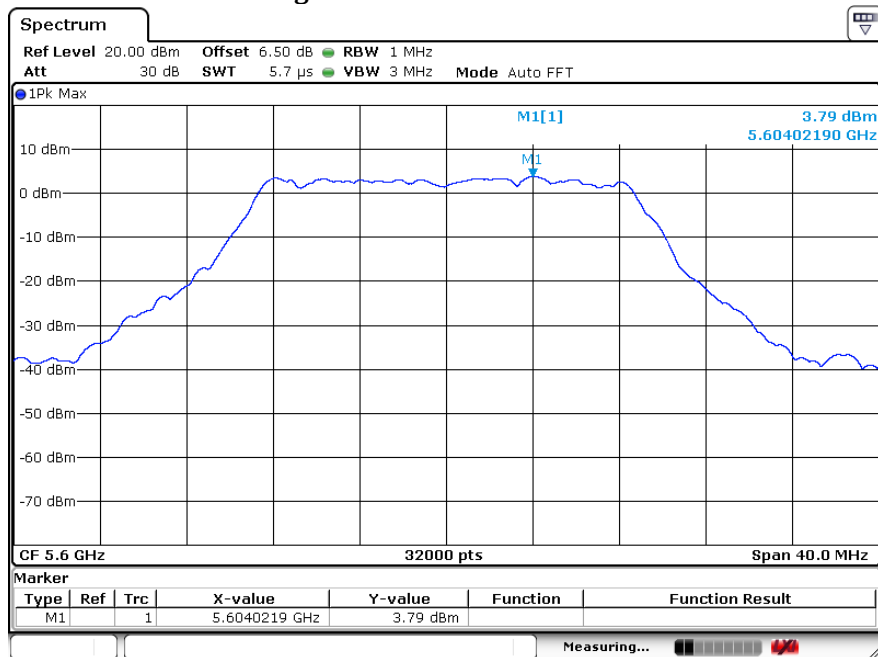


802.11ac (5.47GHz-5.725GHz)
The Lowest Channel 100: 5500MHz

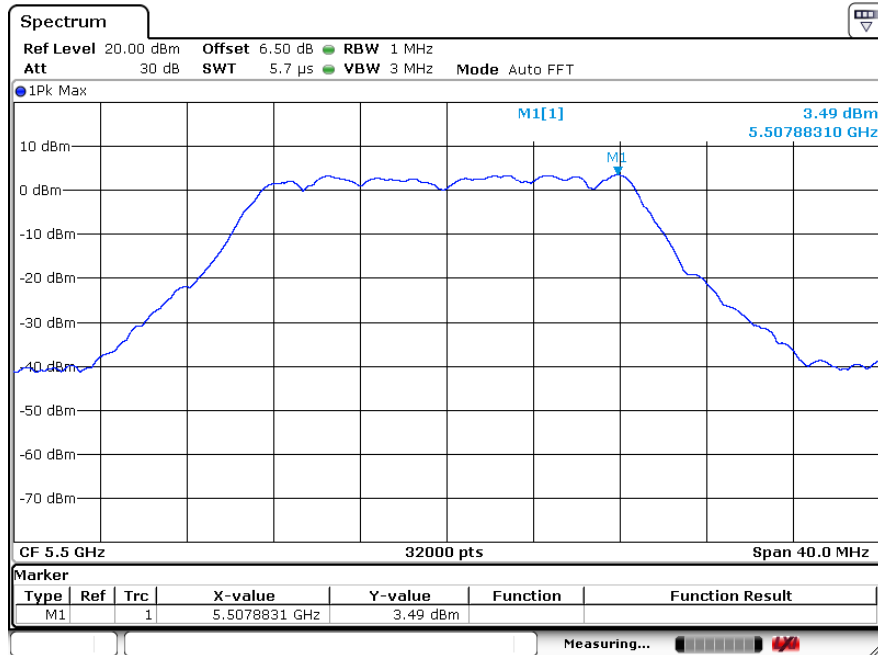


802.11ac (5.47GHz-5.725GHz)
The Middle Channel 120: 5600MHz

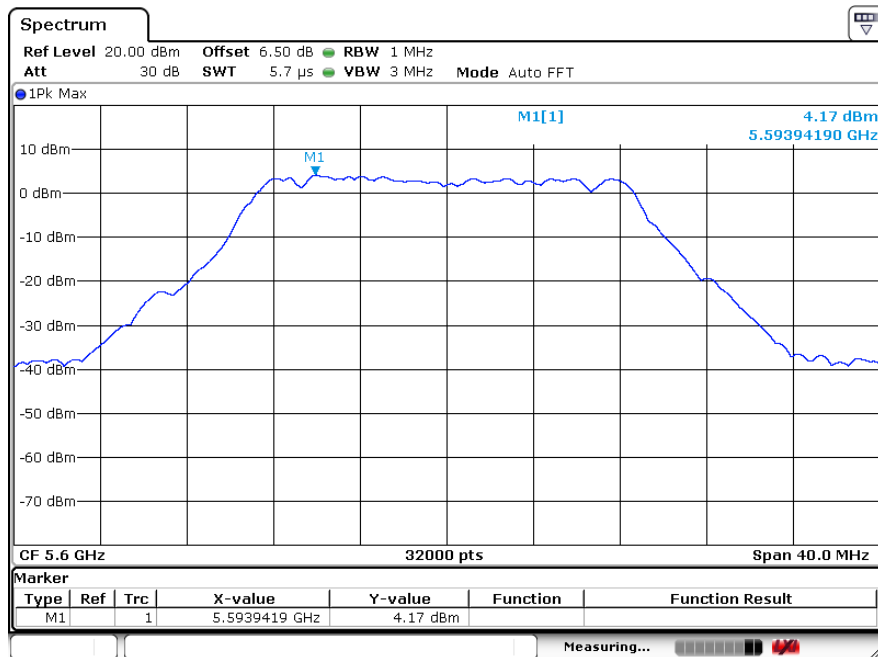


802.11ac (5.47GHz-5.725GHz) The Highest Channel 140: 5700MHz

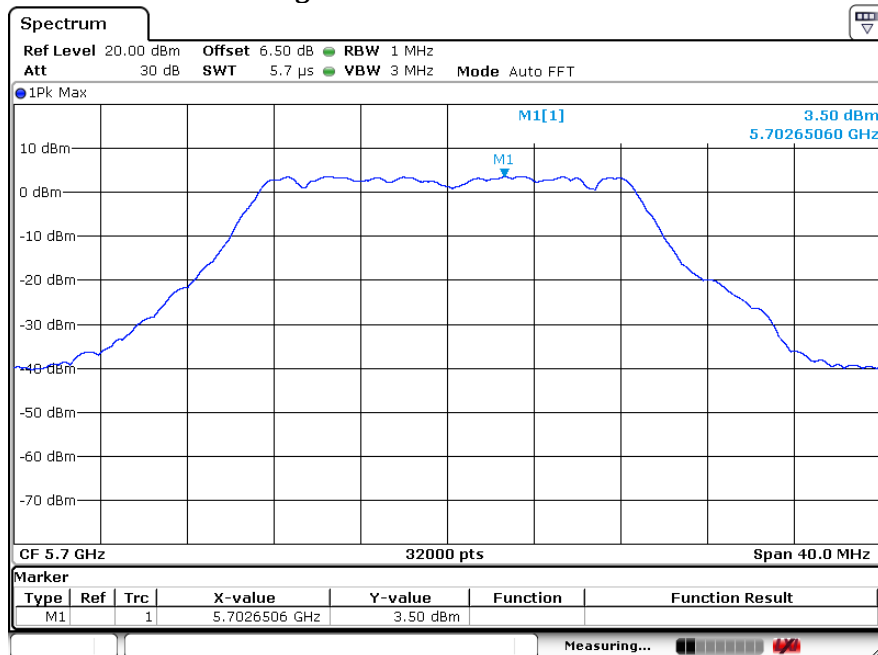


802.11n(40M) (5.47GHz-5.725GHz)
The Lowest Channel 102: 5510MHz

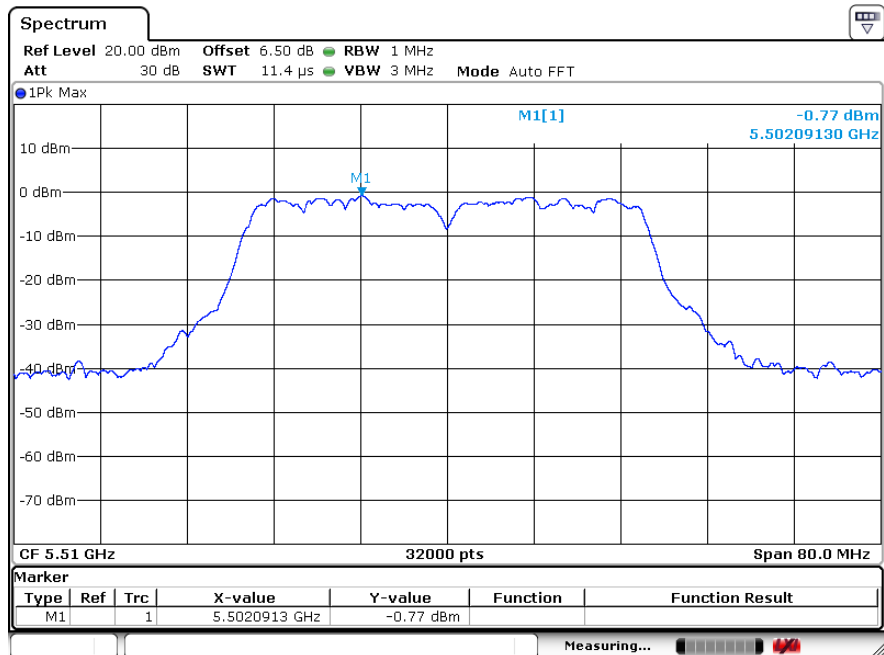


802.11n(40M) (5.47GHz-5.725GHz)
The Middle Channel 118: 5590MHz

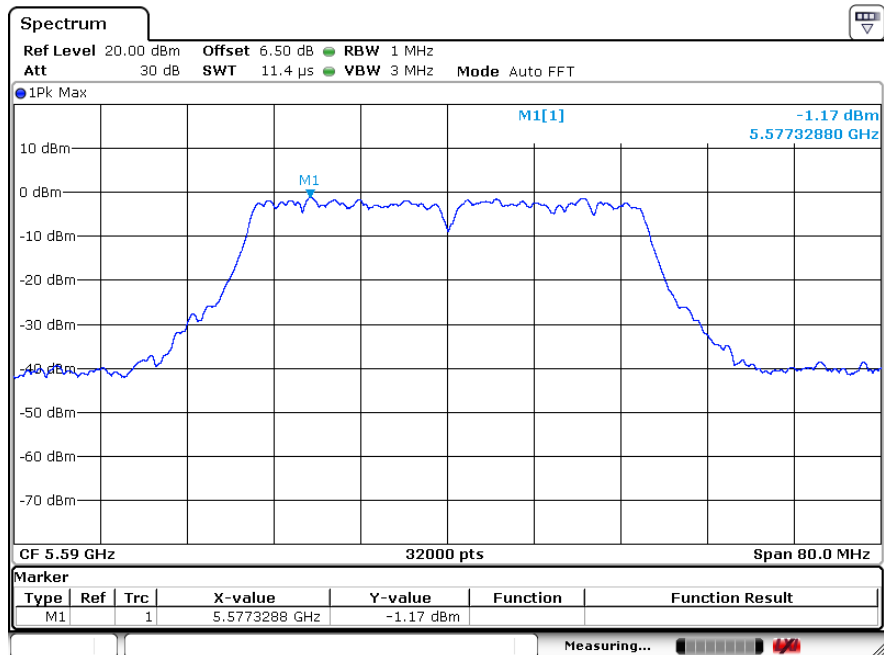


802.11n(40M) (5.47GHz-5.725GHz) The Highest Channel 13a: 5670MHz

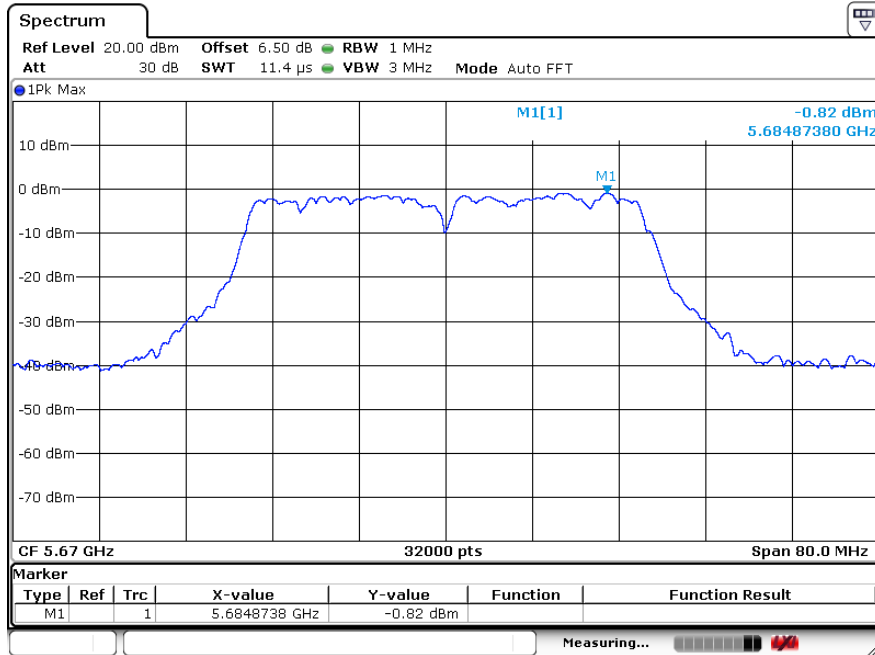


802.11n(40M) (5.47GHz-5.725GHz) The Lowest Channel 102: 5510MHz

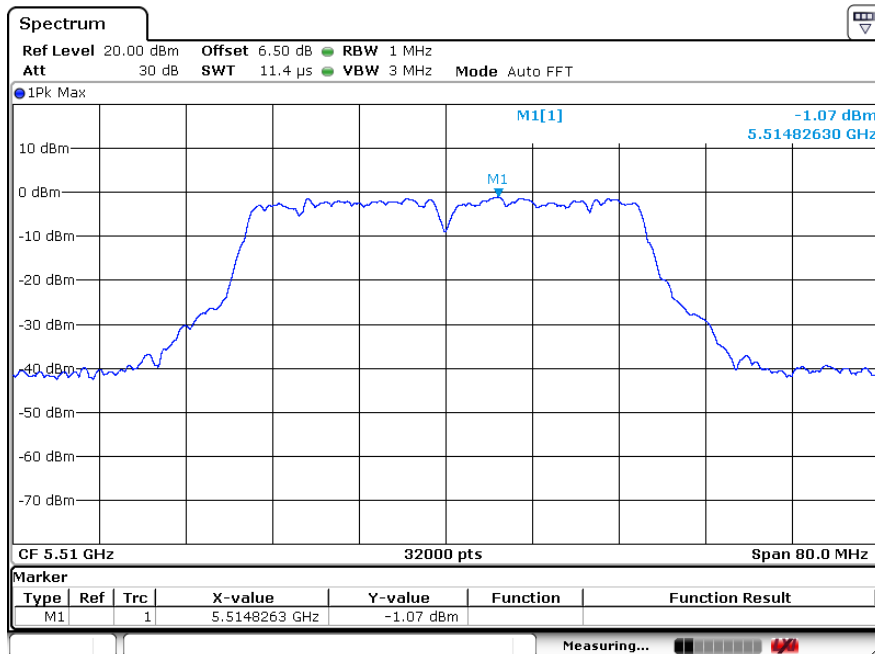


802.11ac(40M) (5.47GHz-5.725GHz)
The Middle Channel 118: 5590MHz

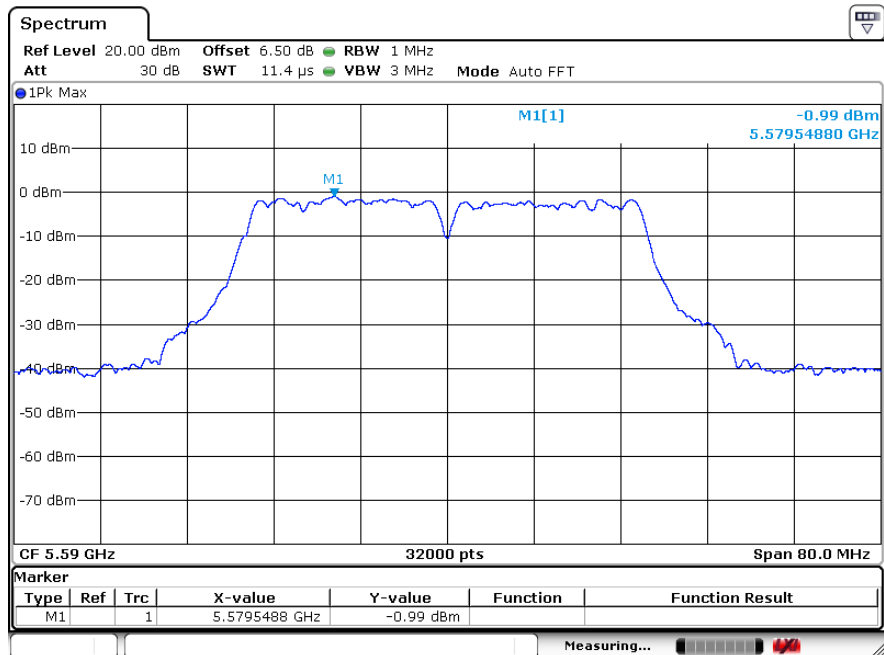

802.11ac(40M) (5.47GHz-5.725GHz)
The Highest Channel 134: 5670MHz

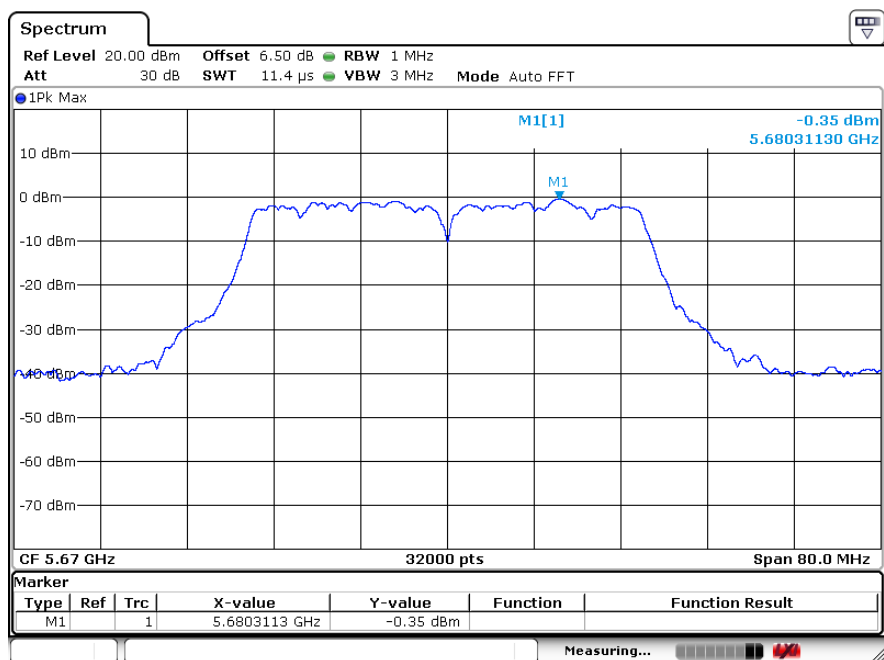

802.11ac(80M) (5.47GHz-5.725GHz)
The Lowest Channel 106: 5530MHz

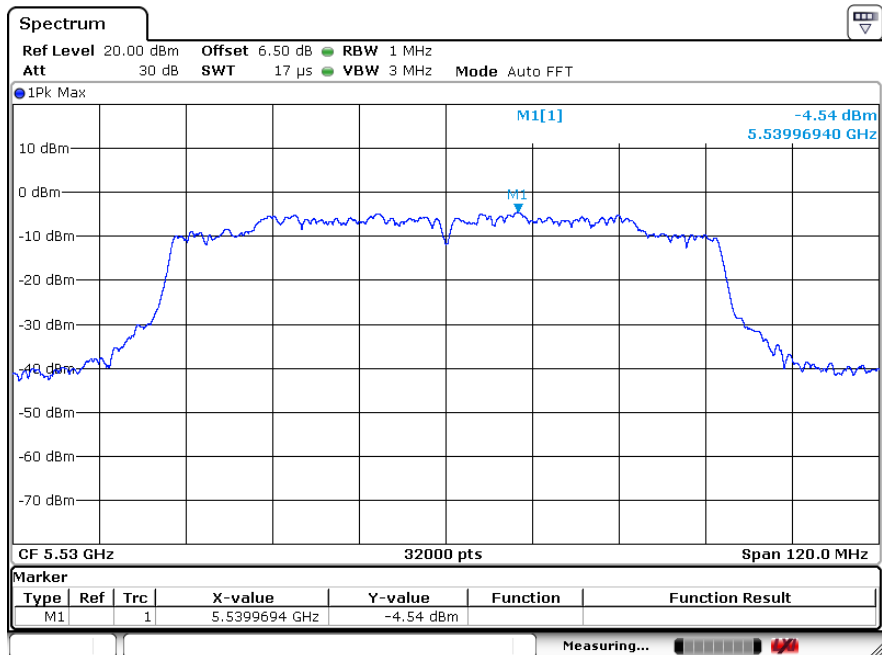

6 MAXIMUM PEAK OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

For UNII Device in the 5.15-5.25 GHz, 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log (26dB BW).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Frequency Band	Limit
5.15 – 5.25 GHz	24dBm
5.25-5.35 GHz	24dBm
5.47 – 5.725 GHz	24dBm

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 TEST RESULTS

EUT：	Panel PC 平板電腦	Model Name：	TD-1060 Slim
Temperature：	22℃	Relative Humidity：	60%
Pressure：	1010 hPa	Test Voltage：	DC12V from adapter
Test Mode：	802.11a/n20/ac20/n40/ac40/ac80		
Test Date：	2020-03-12		
Note: All the data rates have be tested and the worst-case as the table below.			

Test Mode	Channel	Channel Frequency (MHz)	Reading Power (dBm)	Limit (dBm)	Result
802.11a (5.15GHz-5.25GHz) Data rate 6Mbps	CH36	5180	15.19	24	Pass
	CH40	5200	15.23	24	Pass
	CH48	5240	15.06	24	Pass
802.11n(20M) (5.15GHz-5.25GHz) Data rate 13Mbps	CH36	5180	14.74	24	Pass
	CH40	5200	14.58	24	Pass
	CH48	5240	14.61	24	Pass
802.11ac(20M) (5.15GHz-5.25GHz) Data rate 13Mbps	CH36	5180	14.70	24	Pass
	CH40	5200	14.55	24	Pass
	CH48	5240	14.56	24	Pass
802.11n(40M) (5.15GHz-5.25GHz) Data rate 27Mbps	CH38	5190	14.52	24	Pass
	CH46	5230	14.76	24	Pass
802.11ac(40M) (5.15GHz-5.25GHz) Data rate 27Mbps	CH38	5190	14.50	24	Pass
	CH46	5230	14.71	24	Pass
802.11ac(80M) (5.15GHz-5.25GHz) Data rate 58.6Mbps	CH42	5210	13.24	24	Pass

EUT：	Panel PC 平板電腦	Model Name：	TD-1060 Slim
Temperature：	22℃	Relative Humidity：	60%
Pressure：	1010 hPa	Test Voltage：	DC12V from adapter
Test Mode：	802.11a/n20/ac20/n40/ac40/ac80		
Test Date：	2020-03-12		
Note: All the data rates have be tested and the worst-case as the table below.			

Test Mode	Channel	Channel Frequency (MHz)	Reading Power (dBm)	Limit (dBm)	Result
802.11a (5.25GHz-5.35GHz) Data rate 6Mbps	CH52	5260	14.97	24	Pass
	CH56	5280	14.94	24	Pass
	CH64	5320	15.10	24	Pass
802.11n(20M) (5.25GHz-5.35GHz) Data rate 13Mbps	CH52	5260	13.86	24	Pass
	CH56	5280	14.12	24	Pass
	CH64	5320	14.07	24	Pass
802.11ac(20M) (5.25GHz-5.35GHz) Data rate 13Mbps	CH52	5260	13.78	24	Pass
	CH56	5280	14.11	24	Pass
	CH64	5320	14.04	24	Pass
802.11n(40M) (5.25GHz-5.35GHz) Data rate 27Mbps	CH54	5270	14.62	24	Pass
	CH62	5310	14.27	24	Pass
802.11ac(40M) (5.25GHz-5.35GHz) Data rate 27Mbps	CH54	5270	14.57	24	Pass
	CH62	5310	14.24	24	Pass
802.11ac(80M) (5.25GHz-5.35GHz) Data rate 58.6Mbps	CH58	5290	13.36	24	Pass

EUT：	Panel PC 平板電腦	Model Name：	TD-1060 Slim
Temperature：	22℃	Relative Humidity：	60%
Pressure：	1010 hPa	Test Voltage：	DC12V from adapter
Test Mode：	802.11a/n20/ac20/n40/ac40/ac80		
Test Date：	2020-03-12		
Note: All the data rates have be tested and the worst-case as the table below.			

Test Mode	Channel	Channel Frequency (MHz)	Reading Power (dBm)	Limit (dBm)	Result
802.11a (5.47GHz-5.725GHz) Data rate 6Mbps	CH100	5500	14.67	24	Pass
	CH120	5600	14.78	24	Pass
	CH140	5700	14.56	24	Pass
802.11n(20M) (5.47GHz-5.725GHz) Data rate 13Mbps	CH100	5500	13.94	24	Pass
	CH120	5600	13.86	24	Pass
	CH140	5700	13.75	24	Pass
802.11ac(20M) (5.47GHz-5.725GHz) Data rate 13Mbps	CH100	5500	13.92	24	Pass
	CH120	5600	13.81	24	Pass
	CH140	5700	13.73	24	Pass
802.11n(40M) (5.47GHz-5.725GHz) Data rate 27Mbps	CH102	5510	14.19	24	Pass
	CH118	5590	14.16	24	Pass
	CH134	5670	14.25	24	Pass
802.11ac(40M) (5.47GHz-5.725GHz) Data rate 27Mbps	CH102	5510	14.15	24	Pass
	CH118	5590	14.12	24	Pass
	CH134	5670	14.18	24	Pass
802.11ac(80M) (5.47GHz-5.725GHz) Data rate 58.6Mbps	CH106	5530	13.18	24	Pass

7 BAND EDGE

7.1 APPLIED PROCEDURES / LIMIT

15.407 (b) In any 1 MHz bandwidth outside the frequency band in which the spread spectrum, the radio frequency power that is produced by the intentional radiator shall be below -27 dBm.


7.2 TEST PROCEDURE

- The Transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1 MHz
VBW: 1 MHz
Sweep time= Auto.
- Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
- Find the next peak frequency outside the operation frequency band.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

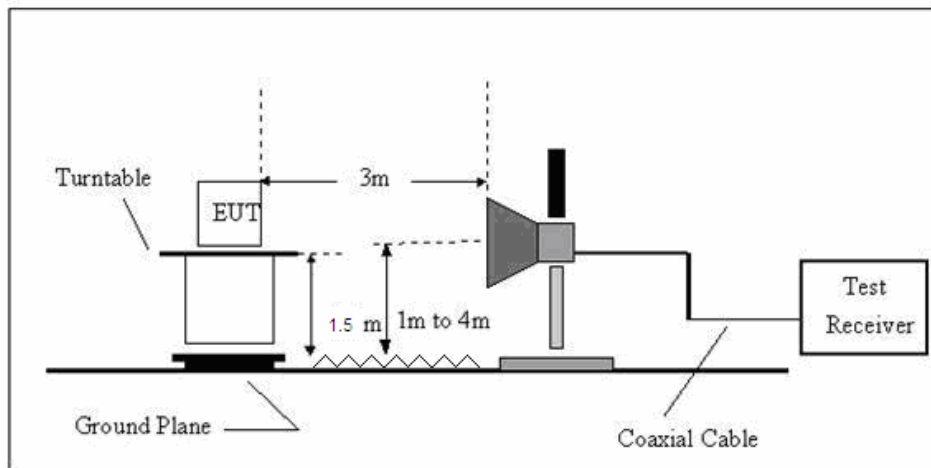

The field strength is calculated by adding the Antenna Factor, Cable Loss & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Pre-amplifier Factor

Remark:

For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$$

For example, if EIRP = -27dBm



$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

7.5 TEST RESULTS



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11a		
Test Date :	2020-03-12		
Note :	In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.		

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuv)	Ant/CF (dB)	Act (dBuv/m)	Limit (dBuv/m)	Note
5470.000	V	50.97	3.96	54.93	68.20	CH 100
5470.000	H	47.88	3.96	51.84	68.20	CH 100
5725.000	V	50.13	3.95	54.08	68.20	CH 140
5725.000	H	51.09	3.95	55.04	68.20	CH 140

802.11a (5.47GHz-5.725GHz) CH 100(Lower)

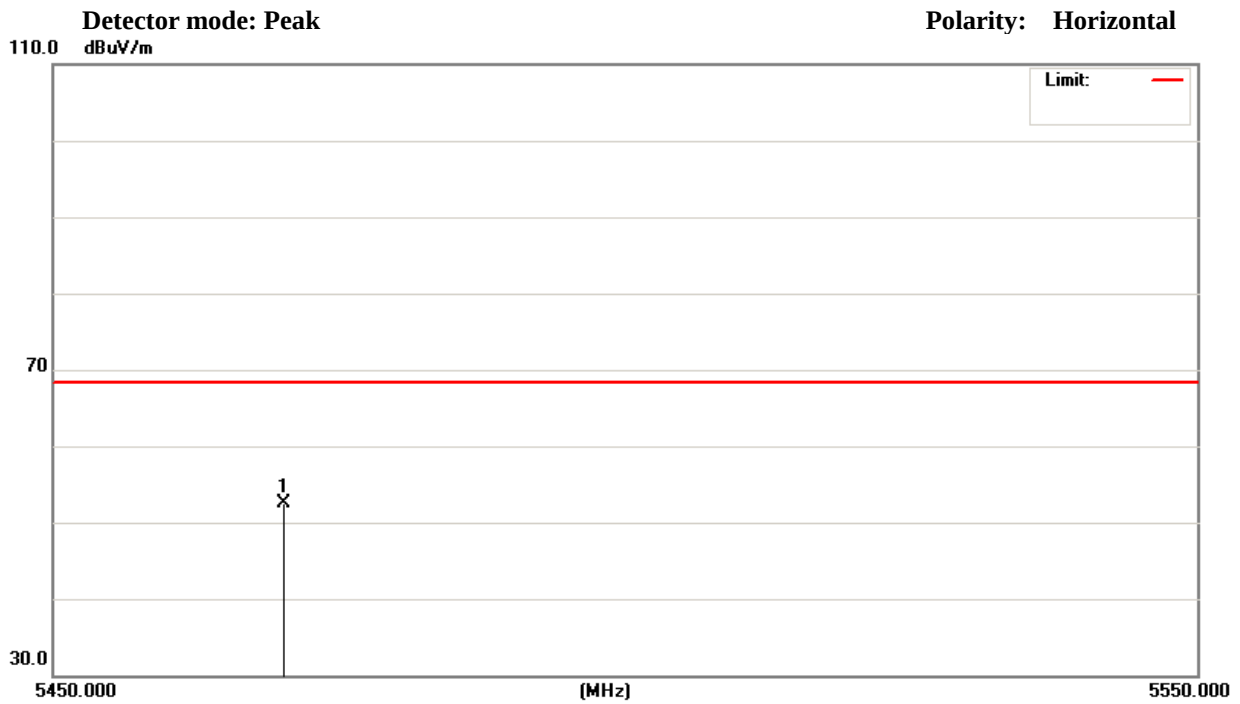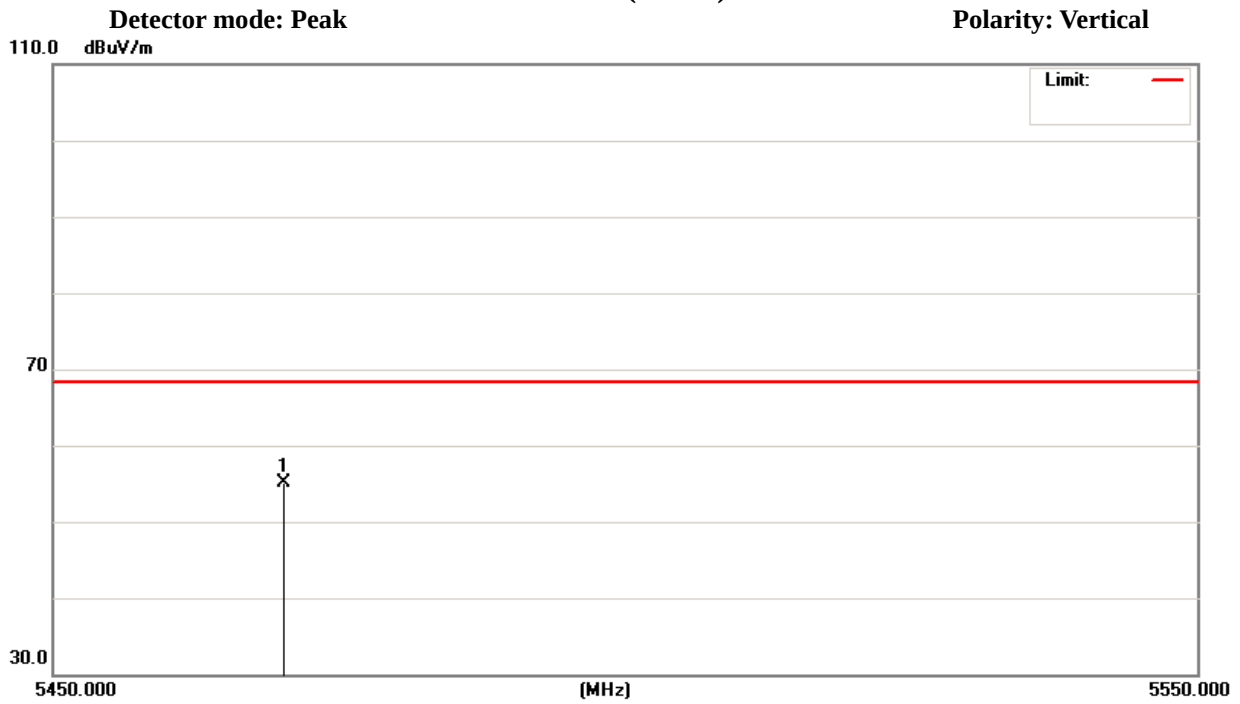



802.11a (5.47GHz-5.725GHz)
CH 140 (Lower)

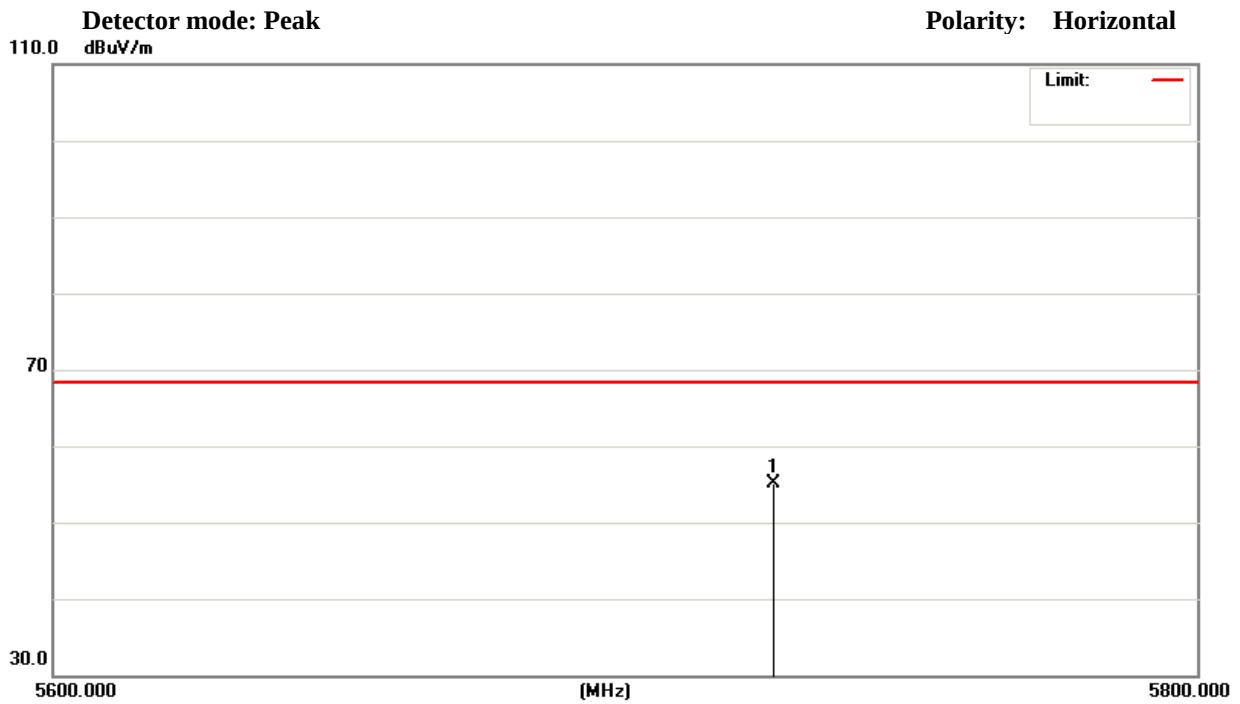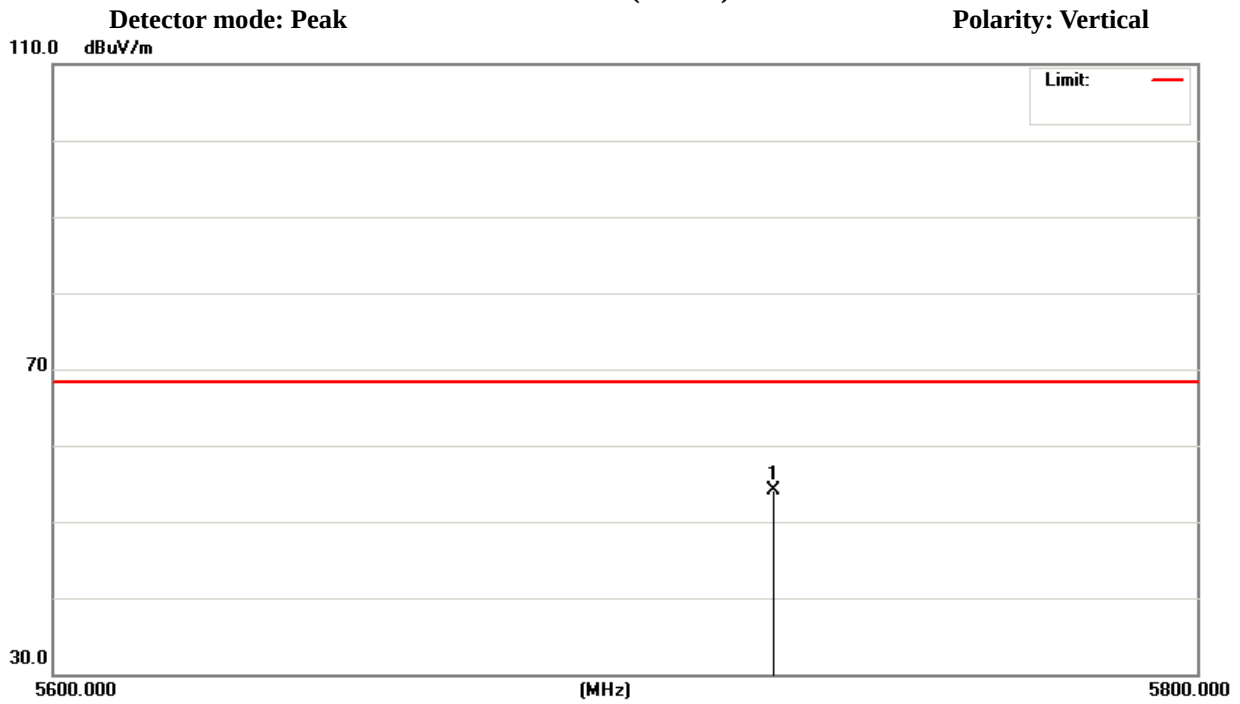



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11n20(5G)		
Test Date :	2020-03-12		
Note :	In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.		

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuv)	Ant/CF (dB)	Act (dBuv/m)	Limit (dBuv/m)	Note
5470.000	V	51.46	3.96	55.42	68.20	CH 100
5470.000	H	48.52	3.96	52.48	68.20	CH 100
5725.000	V	50.19	3.95	54.14	68.20	CH 140
5725.000	H	51.63	3.95	55.58	68.20	CH 140

802.11n(20M) (5.47GHz-5.725GHz)
CH 100 (Lower)

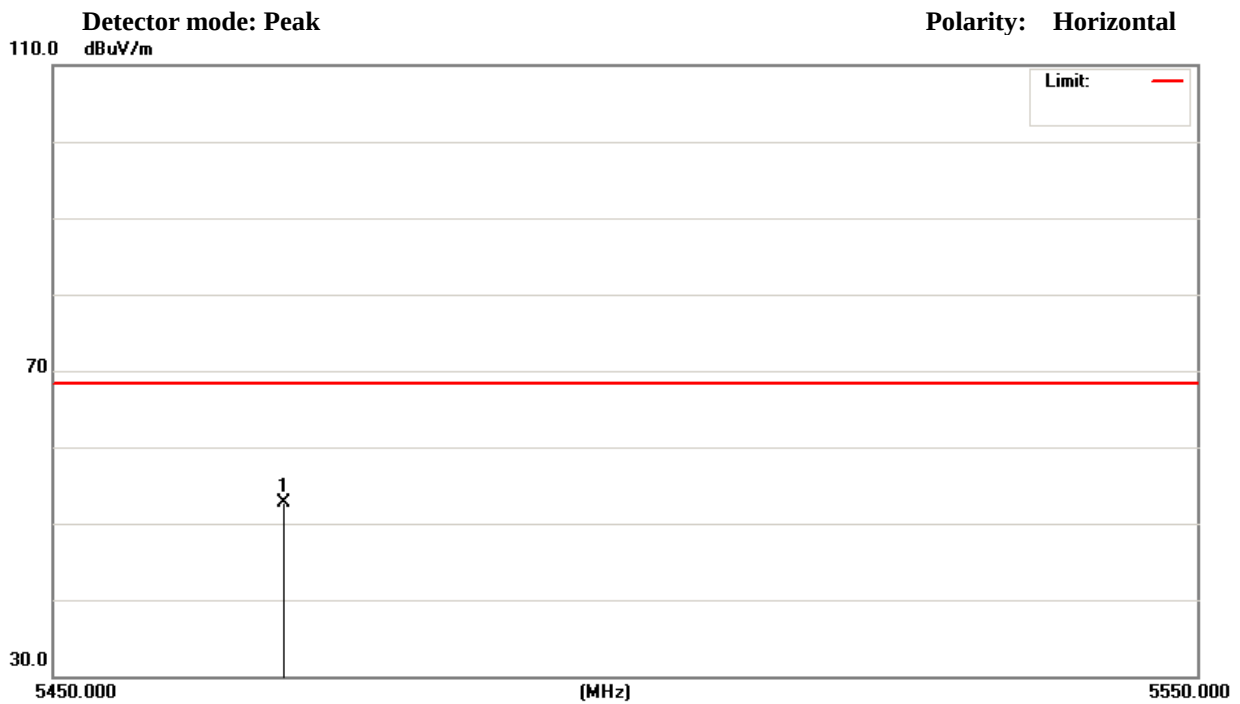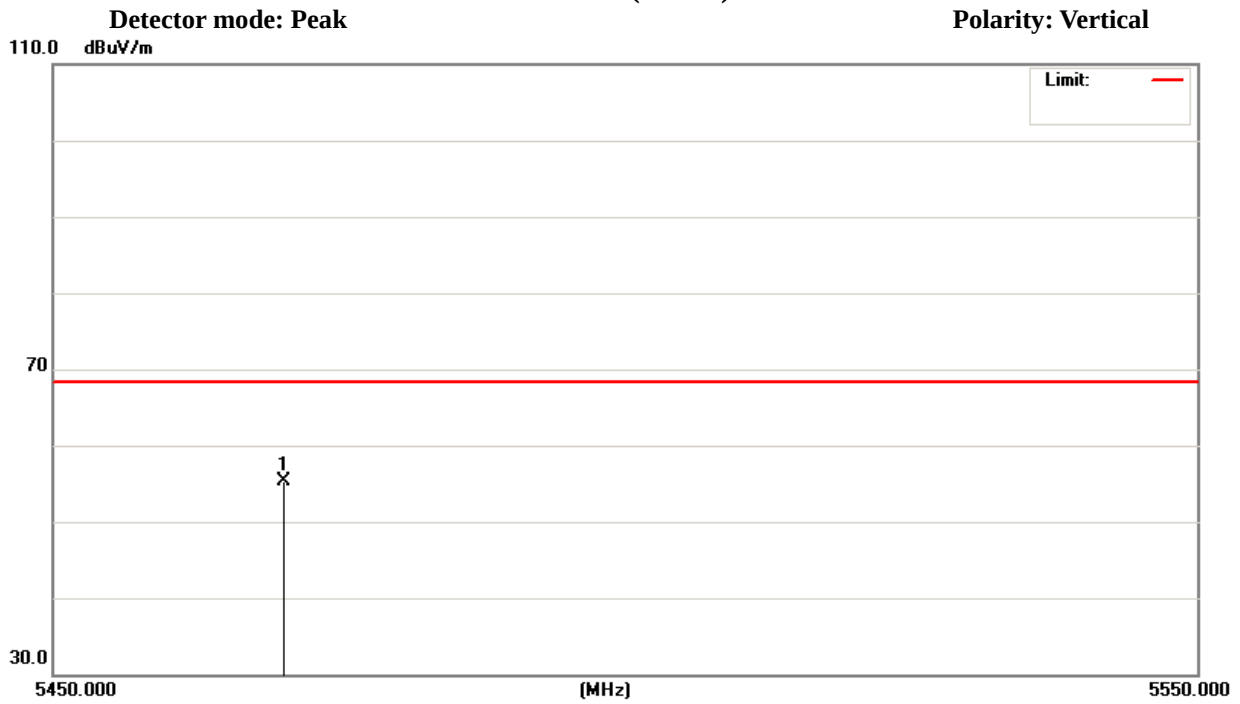



802.11n(20M) (5.47GHz-5.725GHz)
CH 140 (Lower)

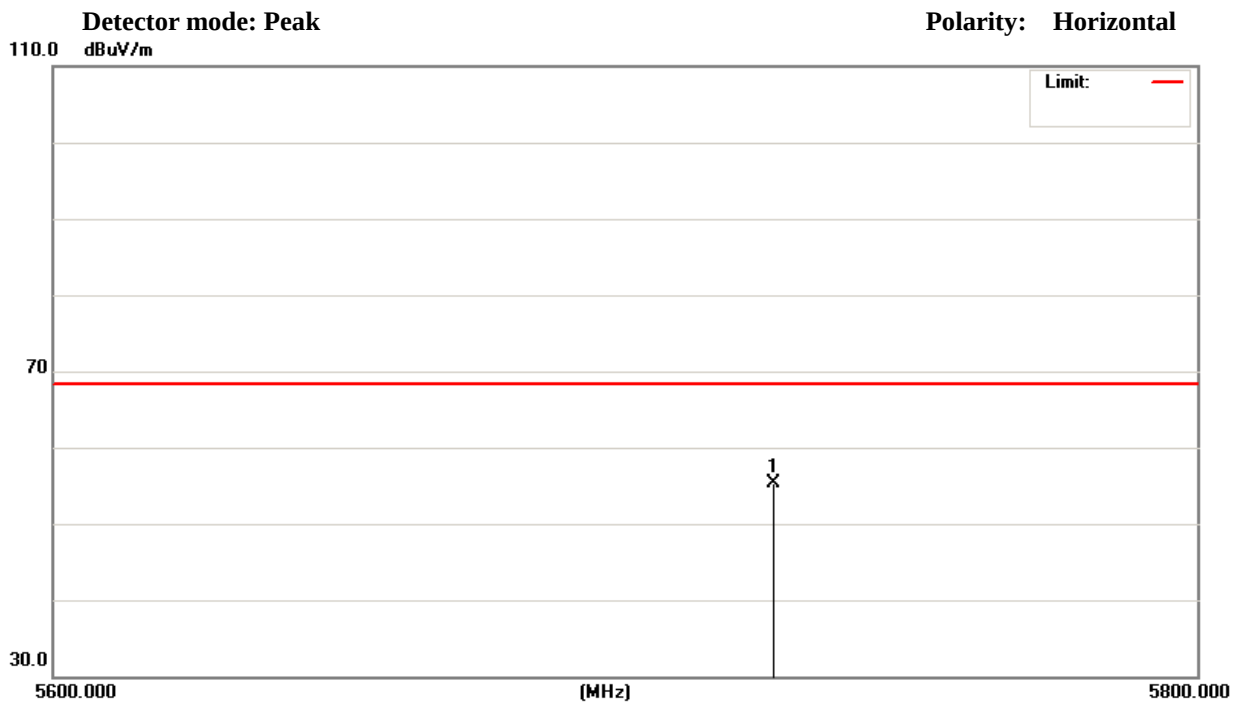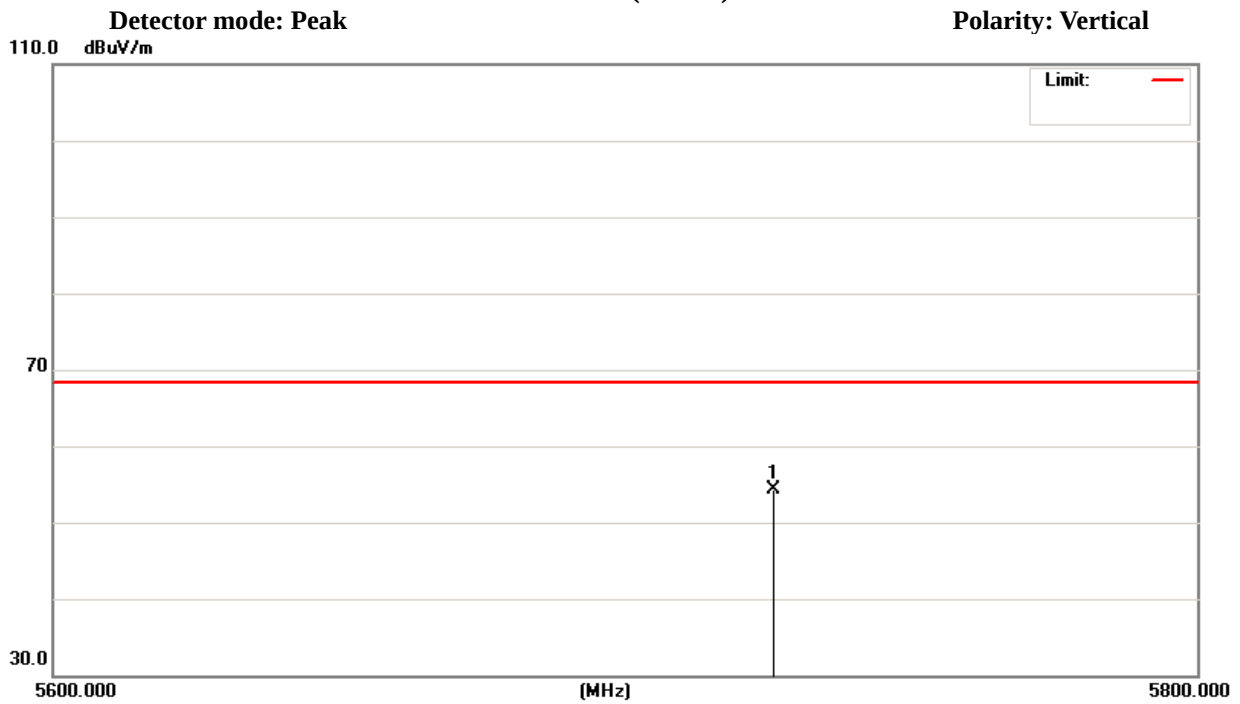



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11ac		
Test Date :	2020-03-12		
Note :	In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.		

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuv)	Ant/CF (dB)	Act (dBuv/m)	Limit (dBuv/m)	Note
5470.000	V	50.94	3.96	54.90	68.20	CH 100
5470.000	H	49.16	3.96	53.12	68.20	CH 100
5725.000	V	50.13	3.95	54.08	68.20	CH 140
5725.000	H	52.05	3.95	56.00	68.20	CH 140

802.11ac (5.47GHz-5.725GHz) CH 100 (Lower)

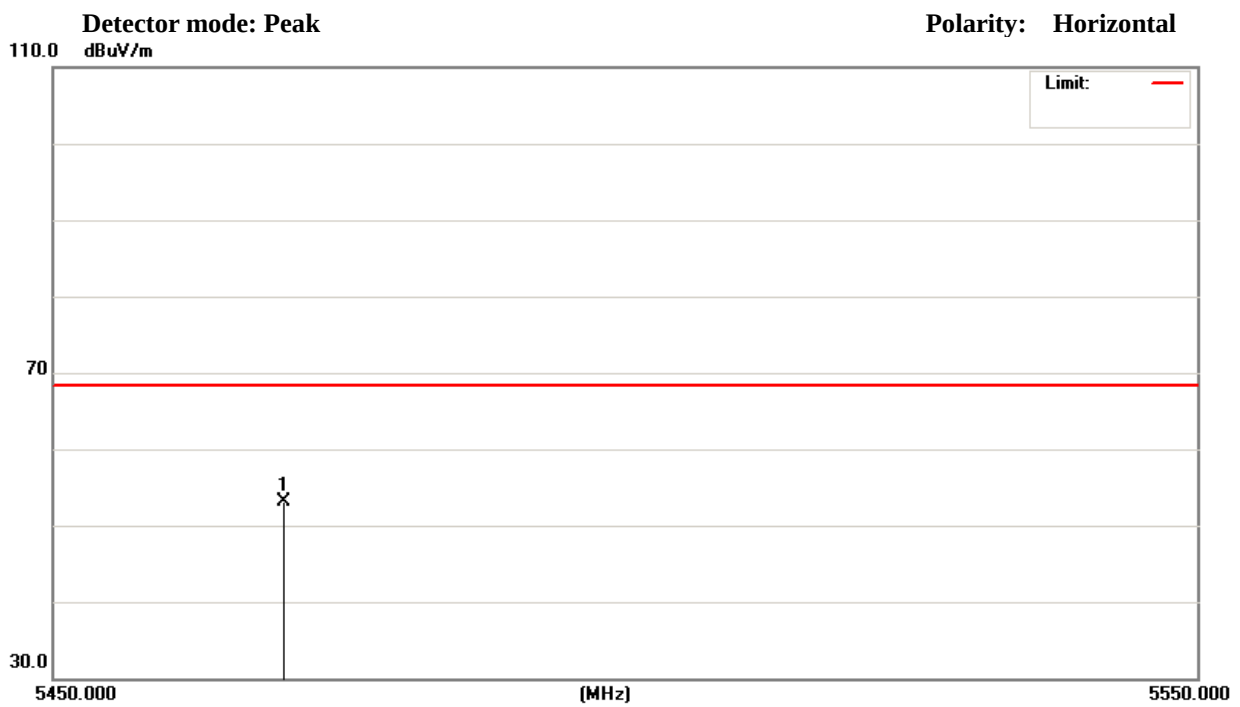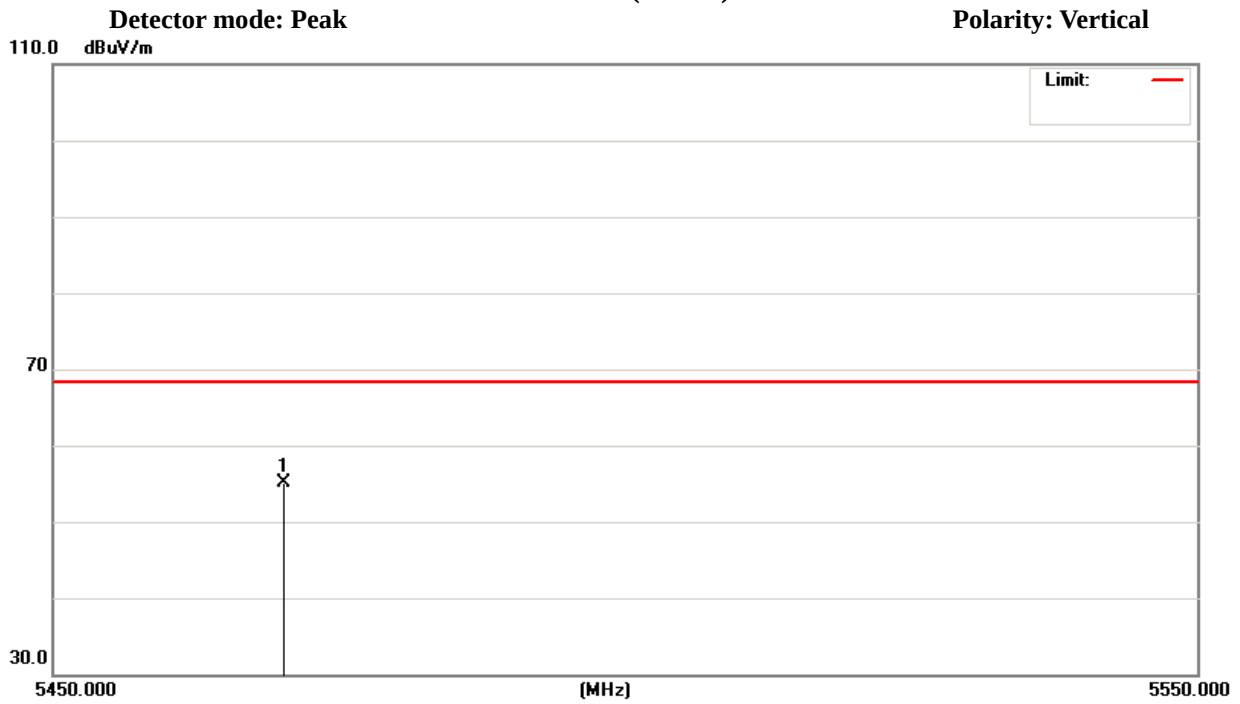



802.11ac (5.47GHz-5.725GHz) CH 140 (Lower)

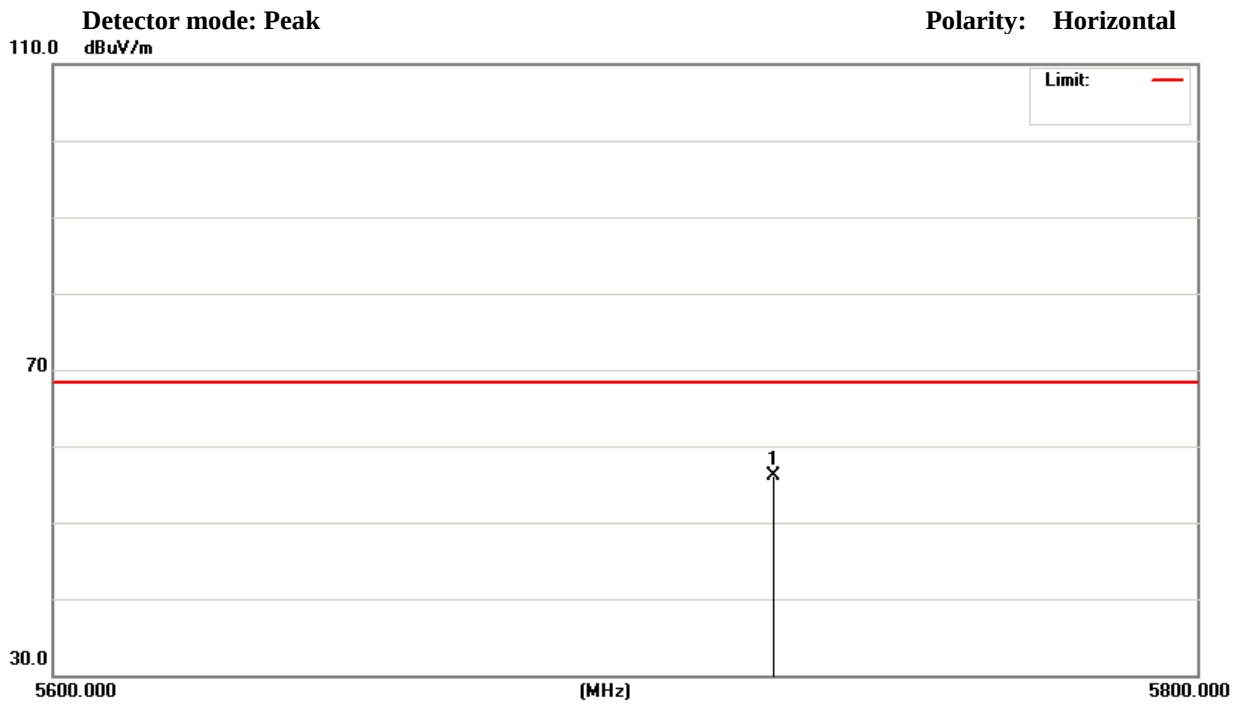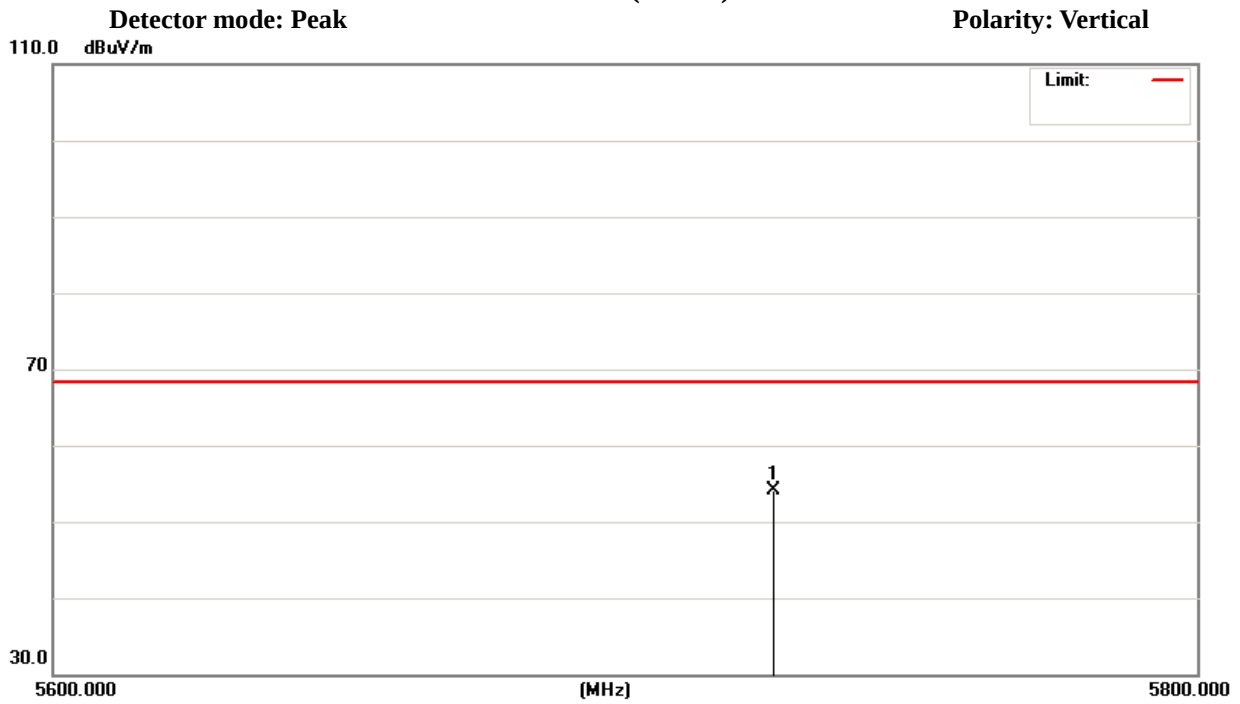



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11n40(5G)		
Test Date :	2020-03-12		
Note :	In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.		

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuV)	Ant/CF (dB)	Act (dBuV/m)	Limit (dBuV/m)	Note
5470.000	V	51.85	3.96	55.81	68.20	CH 102
5470.000	H	51.63	3.96	55.59	68.20	CH 102
5725.000	V	51.49	3.95	55.44	68.20	CH 134
5725.000	H	52.19	3.95	56.14	68.20	CH 134

802.11n(40M) (5.47GHz-5.725GHz)
CH 102 (Lower)

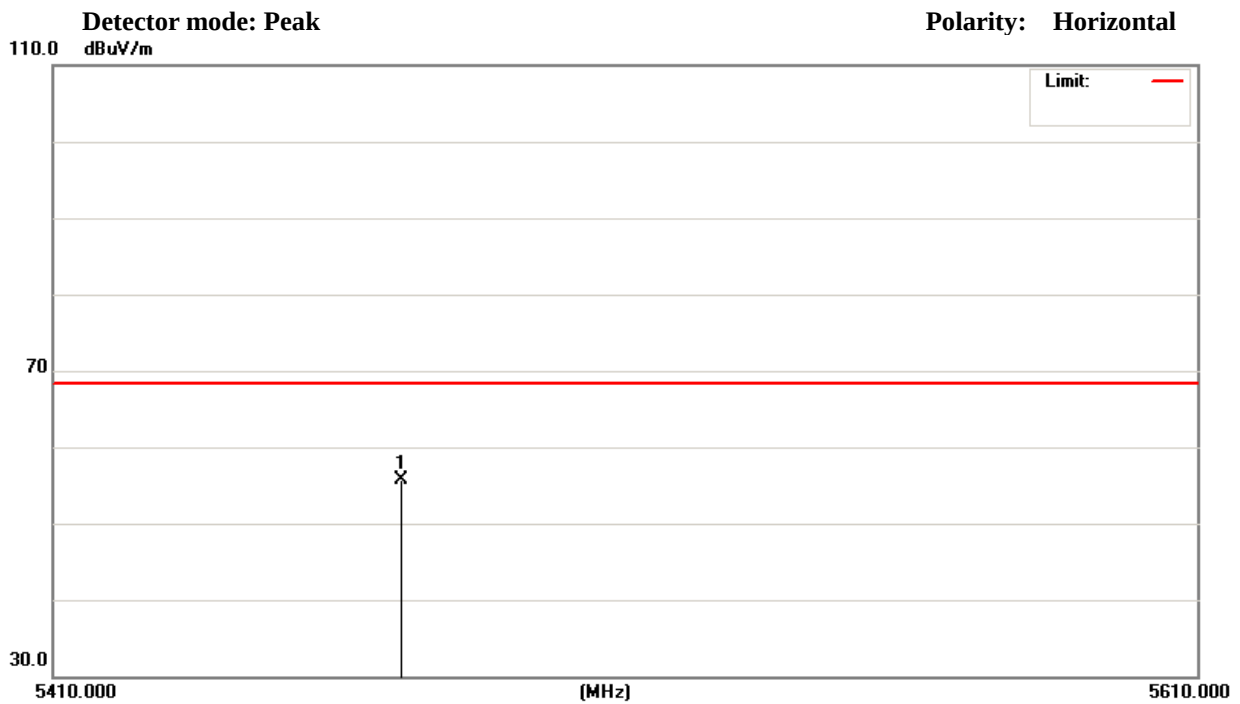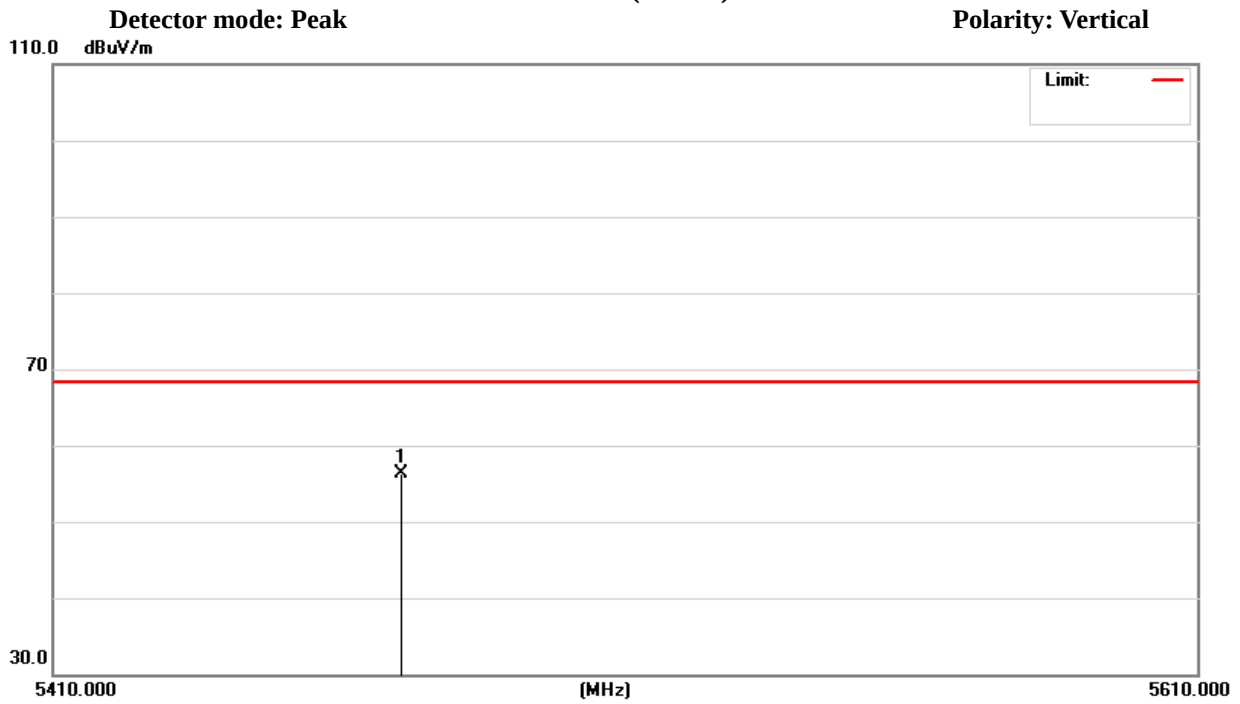



802.11n(40M) (5.47GHz-5.725GHz)
CH 134 (Lower)

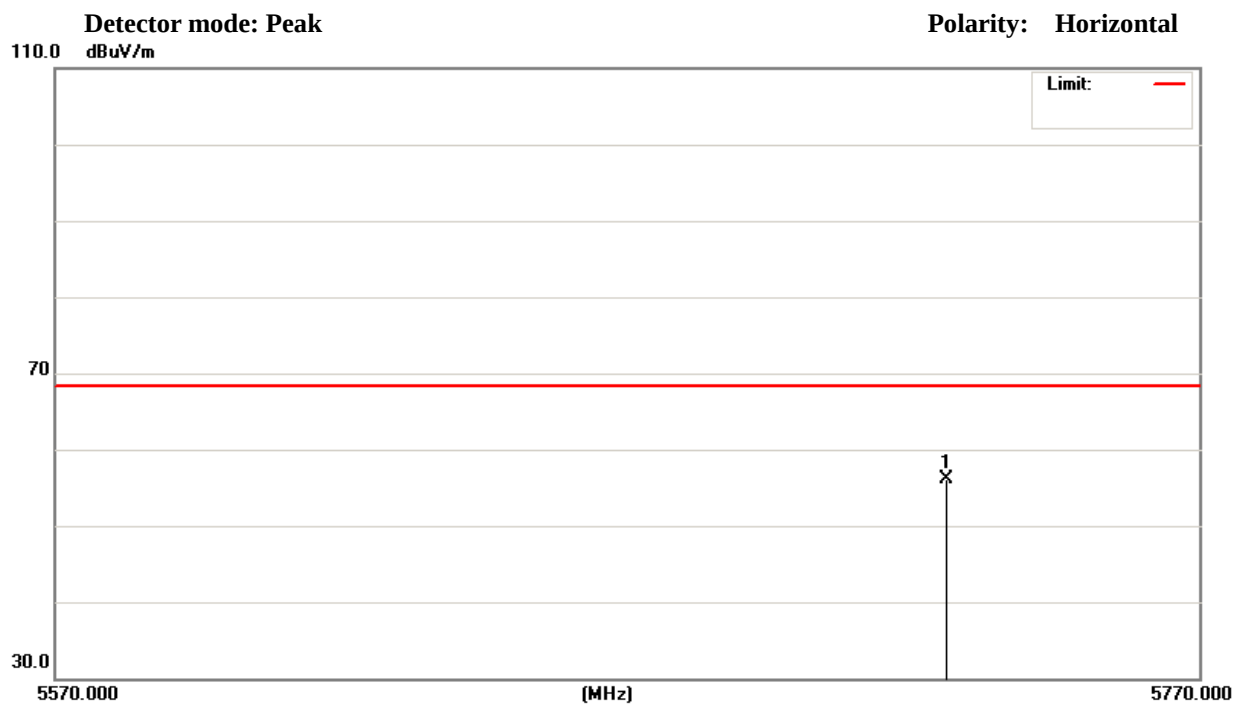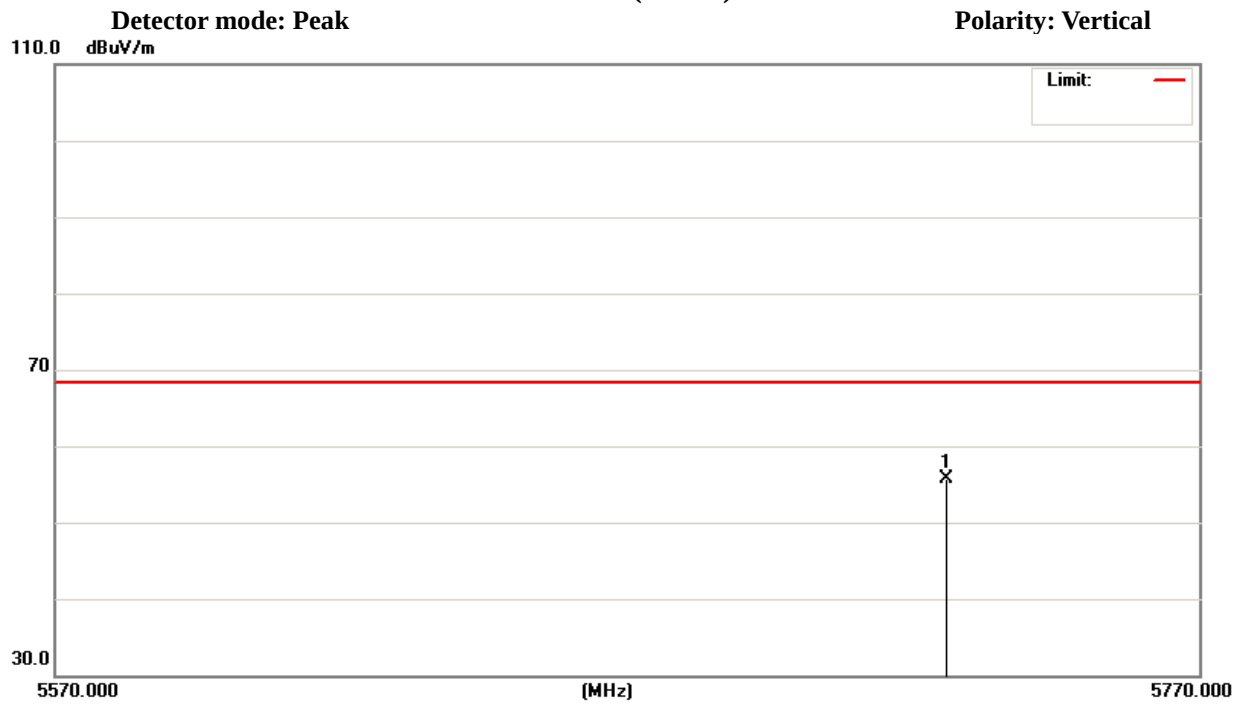



EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11ac40(5G)		
Test Date :	2020-03-12		
Note :	In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.		

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuv)	Ant/CF (dB)	Act (dBuv/m)	Limit (dBuv/m)	Note
5470.000	V	52.74	3.96	56.70	68.20	CH 102
5470.000	H	53.21	3.96	57.17	68.20	CH 102
5725.000	V	53.36	3.95	57.31	68.20	CH 134
5725.000	H	52.57	3.95	56.52	68.20	CH 134

802.11ac(40M) (5.47GHz-5.725GHz)
CH 102 (Lower)

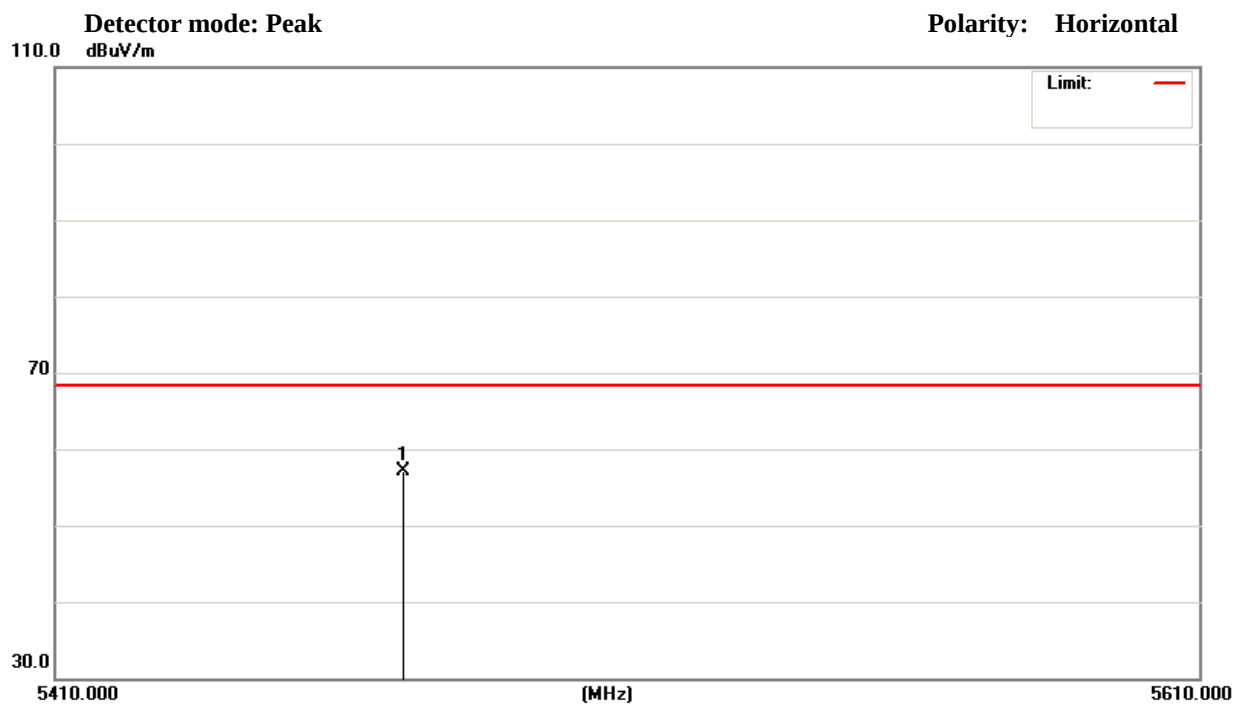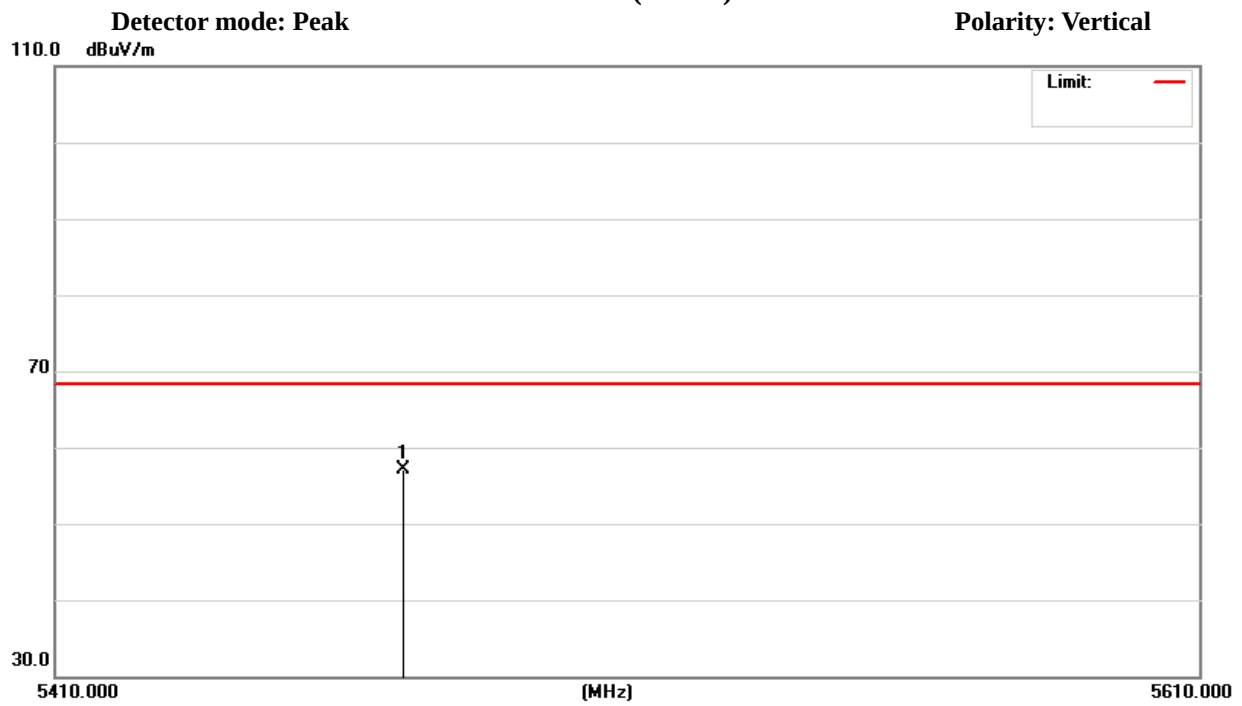



802.11ac(40M) (5.47GHz-5.725GHz)
CH 134 (Lower)

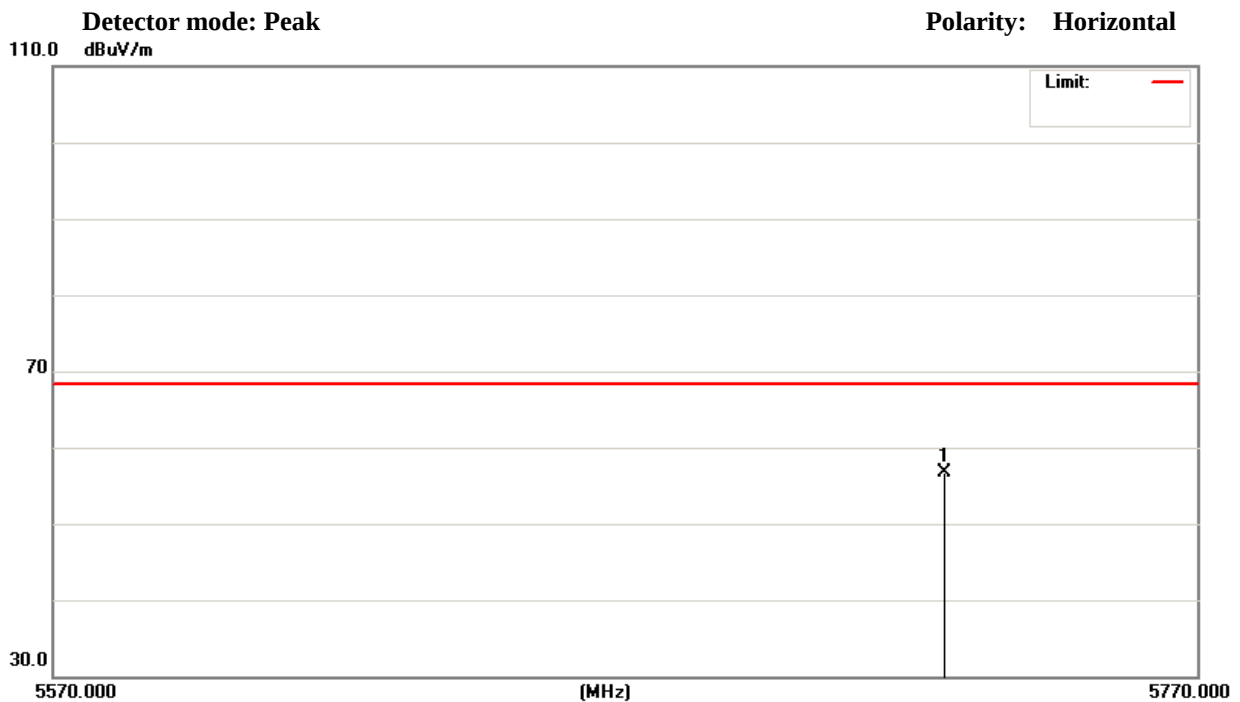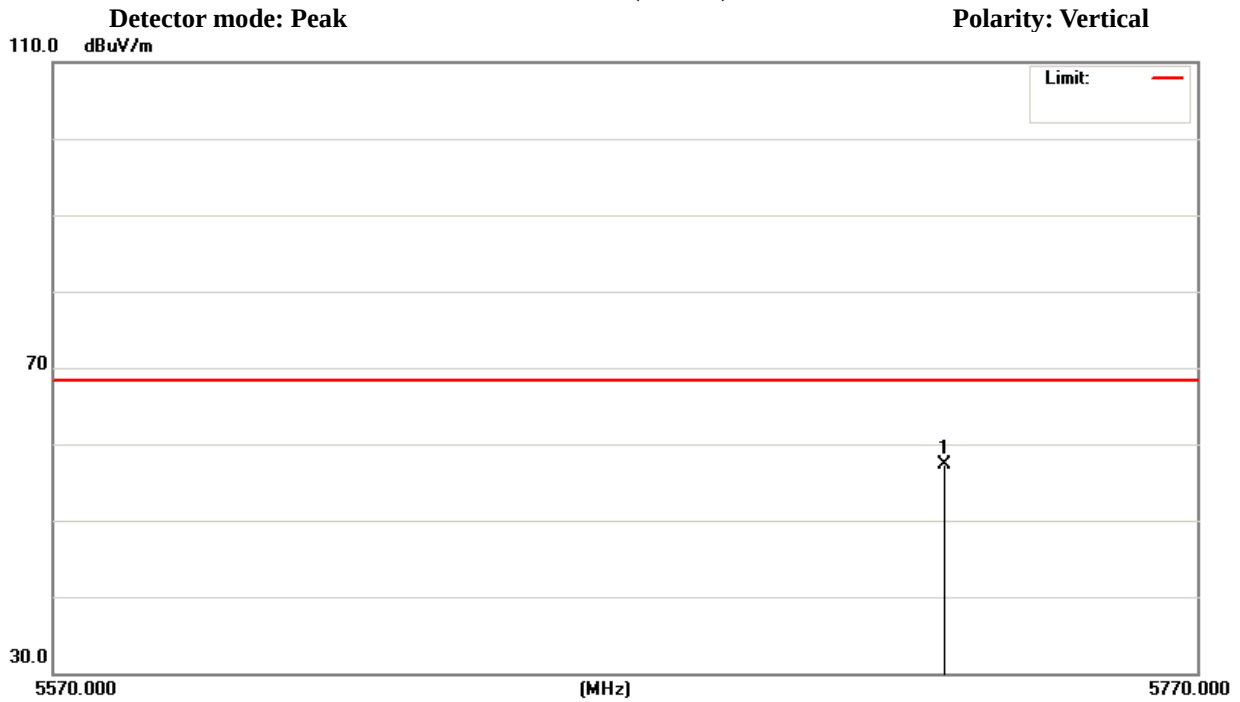

EUT :	Panel PC 平板電腦	Model Name :	TD-1060 Slim
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Voltage :	DC12V from adapter
Test Mode :	802.11 AC80(5G)		
Test Date :	2020-03-12		
Note :	In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.		

Freq. (MHz)	Ant.Pol. H/V	Reading (dBuv)	Ant/CF (dB)	Act (dBuv/m)	Limit (dBuv/m)	Note
5470.000	V	51.98	3.96	55.94	68.20	CH 106
5725.000	V	52.76	3.95	56.71	68.20	CH 106
5470.000	H	52.34	3.96	56.3	68.20	CH 106
5725.000	H	53.19	3.95	57.14	68.20	CH 106

802.11ac(80M) (5.31GHz-5.775GHz) CH 106 (Lower)

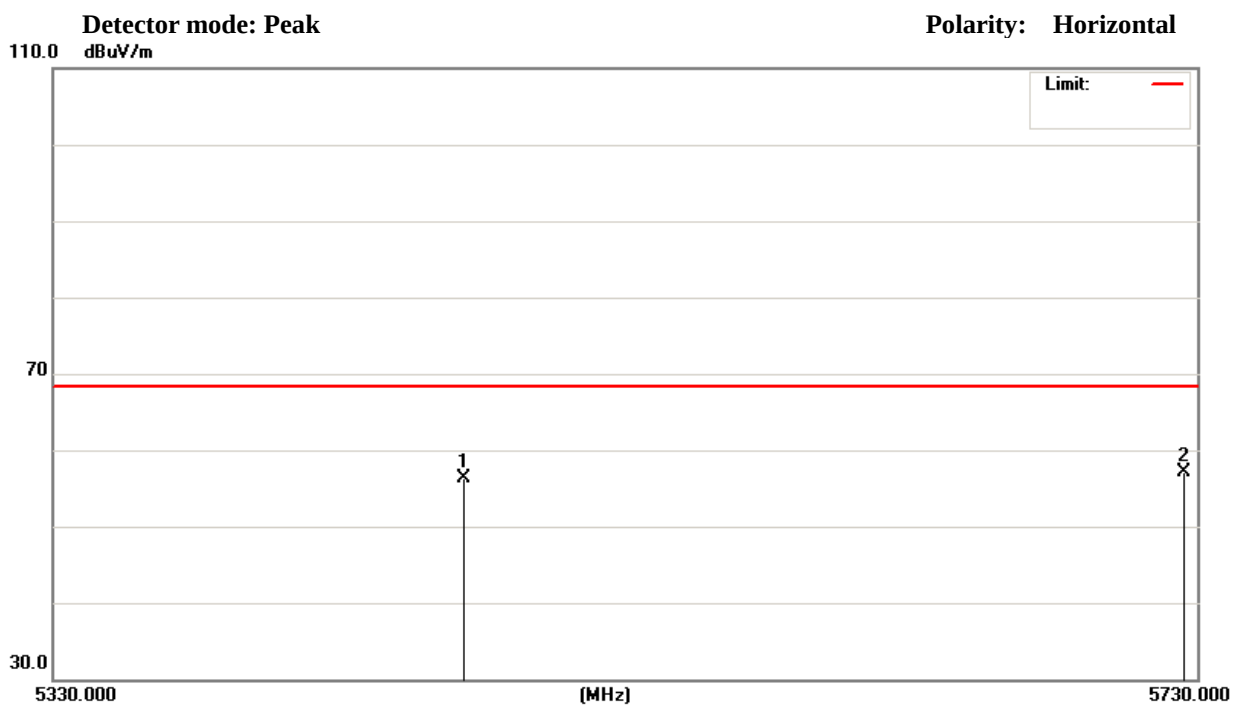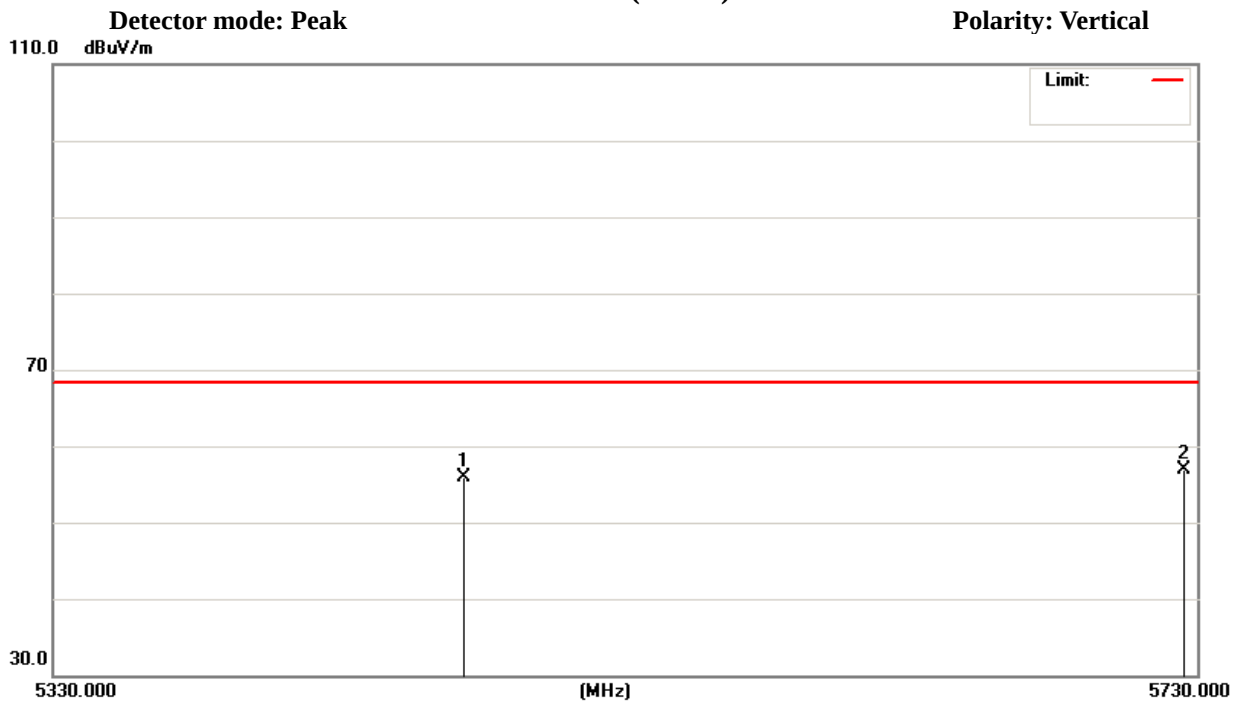

9. EUT TEST PHOTO

**Radiated Measurement Photos
30MHz-1GHz**



**Radiated Measurement Photos
Above 1GHz**



Conducted Measurement Photos**10. APPENDIX-Photographs of EUT Constructional Details**

Please refer to report APPENDIX.

**** End of Report ****