


Site: AC1	Time: 2020/03/15 - 18:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz with OAW-AP1361 (CDD Mode)	

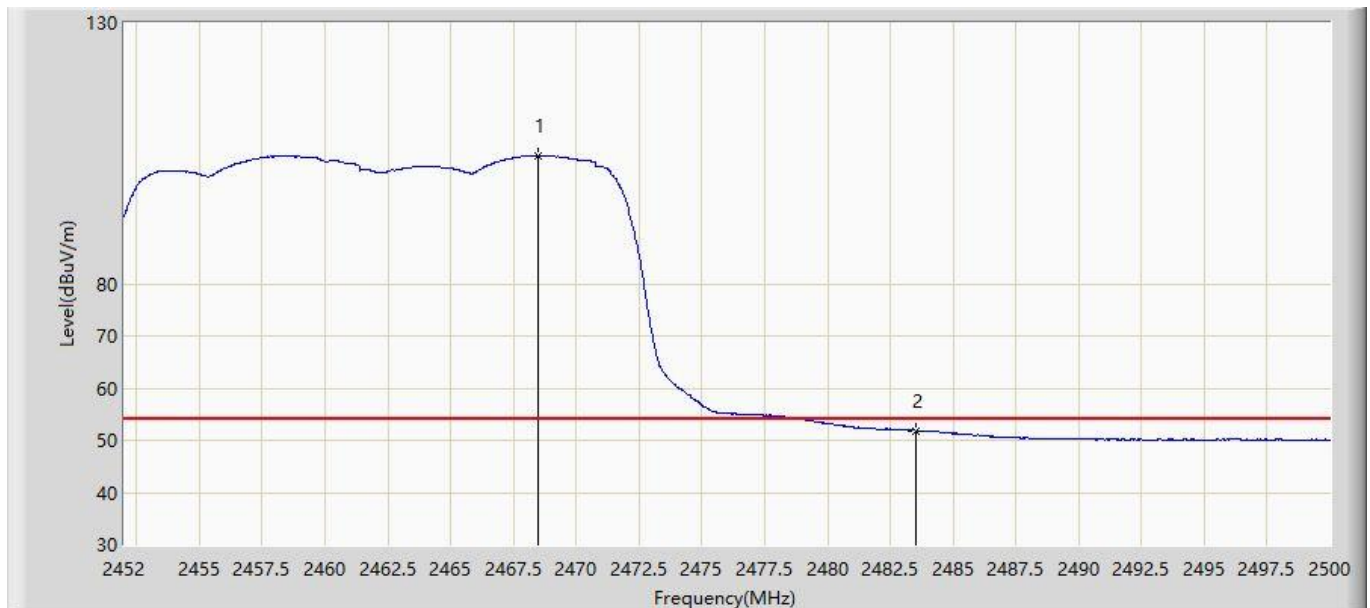


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.464	104.548	71.913	N/A	N/A	32.635	AV
2			2483.500	51.877	19.173	-2.123	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/15 - 18:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1361 (CDD Mode)	

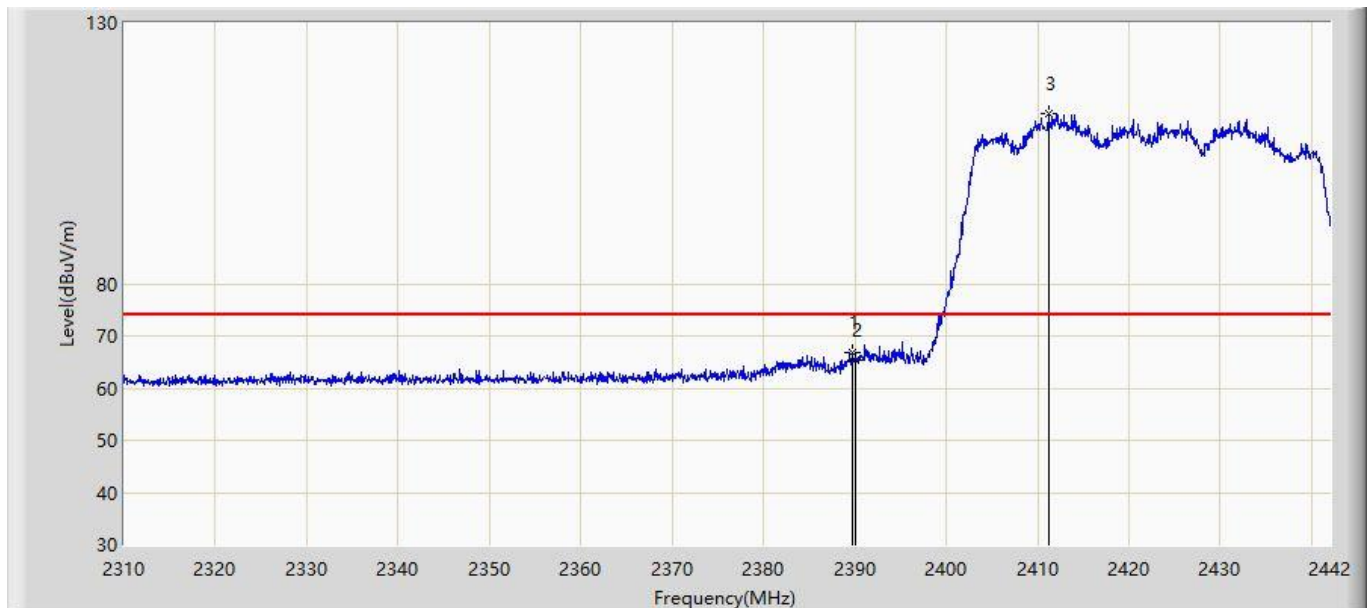


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.728	66.921	34.648	-7.079	74.000	32.273	PK
2			2390.000	65.309	33.035	-8.691	74.000	32.274	PK
3		*	2411.244	112.605	80.234	N/A	N/A	32.371	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/15 - 18:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1361 (CDD Mode)	

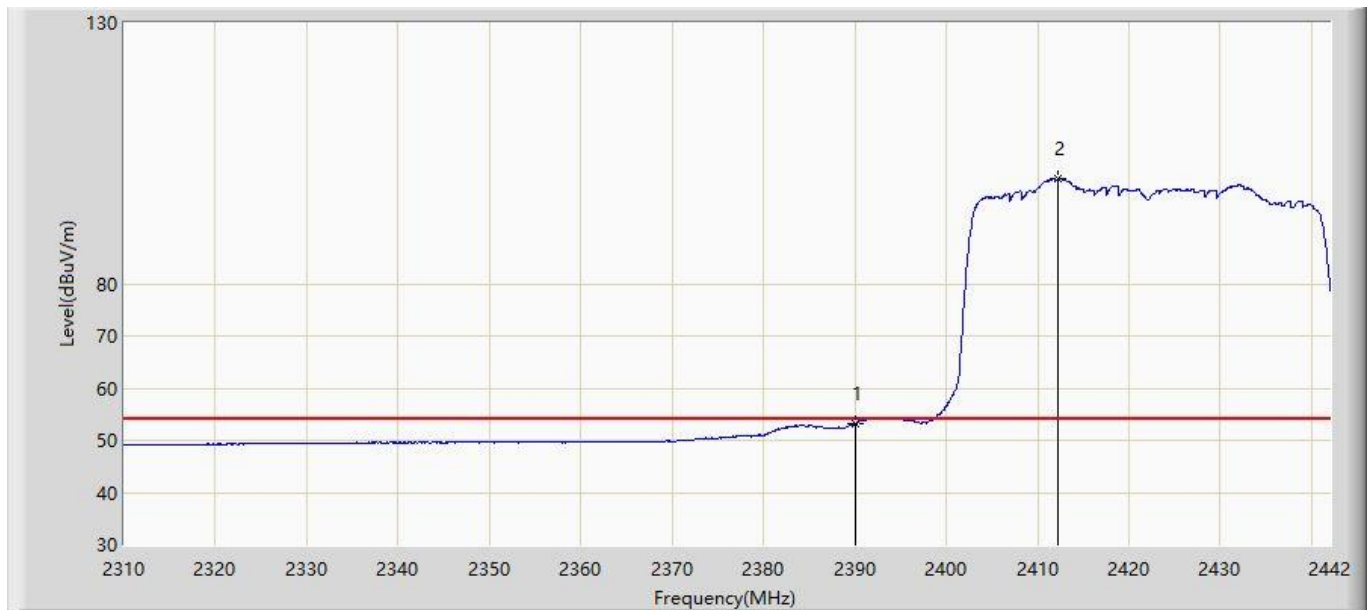


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.194	20.920	-0.806	54.000	32.274	AV
2		*	2412.300	100.042	67.666	N/A	N/A	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/15 - 18:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1361 (CDD Mode)	

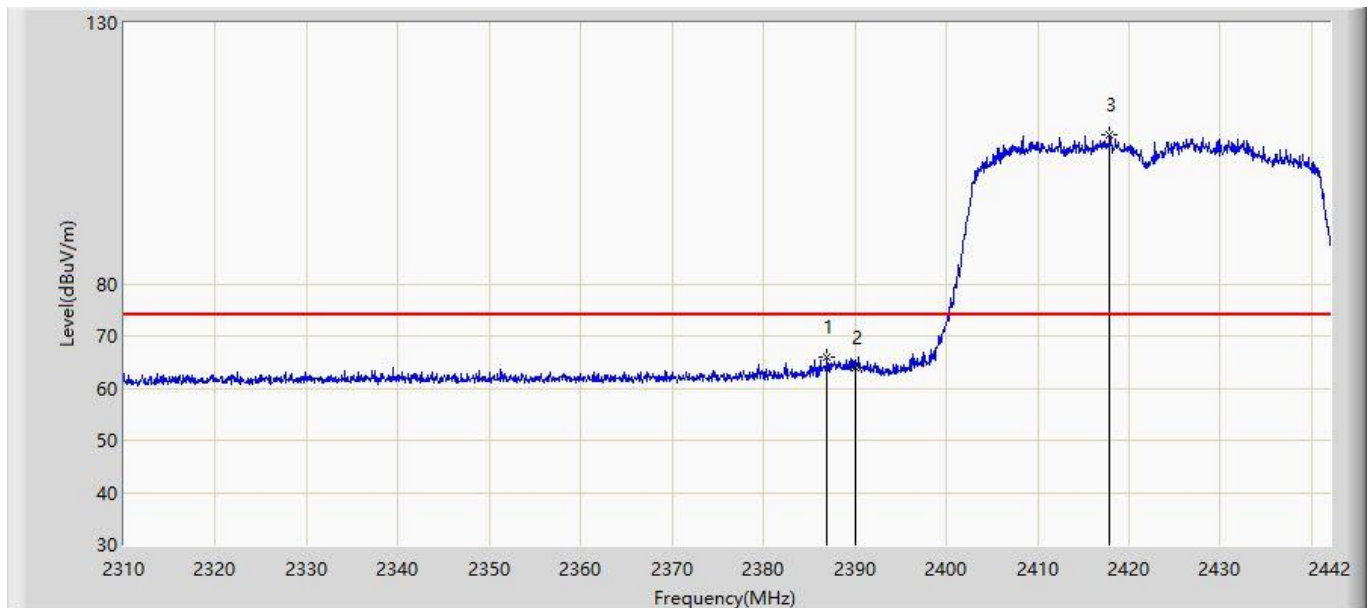


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.956	65.993	33.733	-8.007	74.000	32.260	PK
2			2390.000	63.945	31.671	-10.055	74.000	32.274	PK
3		*	2417.910	108.633	76.231	N/A	N/A	32.402	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/15 - 18:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1361 (CDD Mode)	

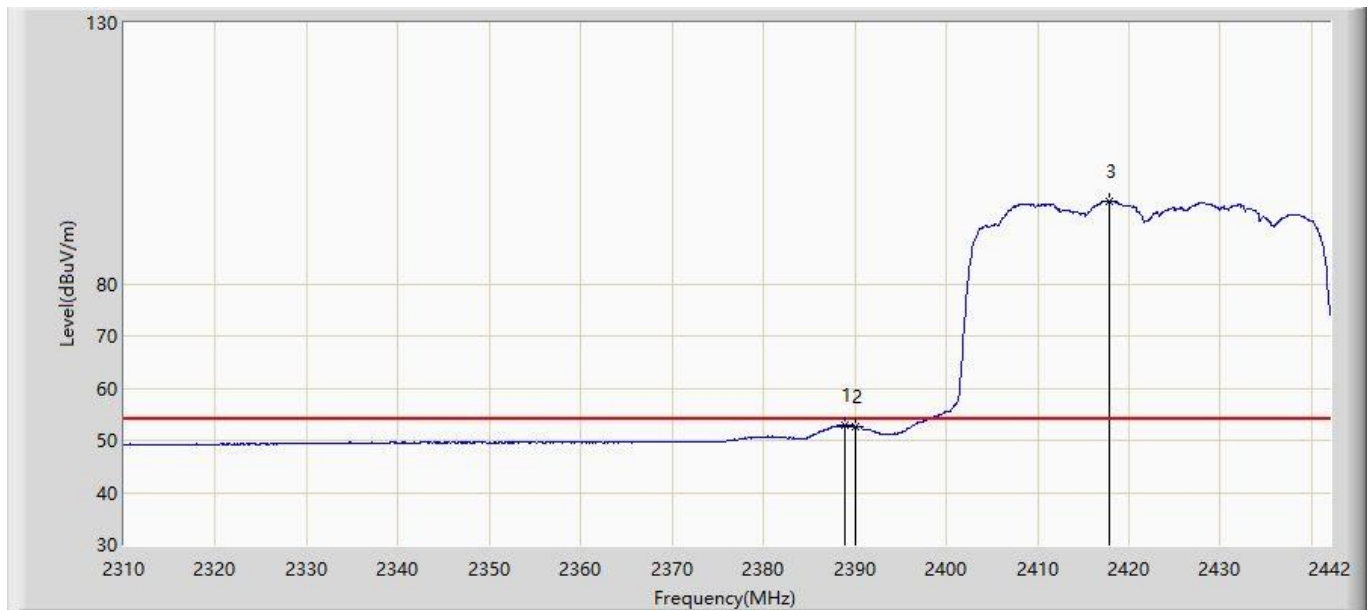


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.936	52.833	20.563	-1.167	54.000	32.270	AV
2			2390.000	52.490	20.216	-1.510	54.000	32.274	AV
3		*	2417.910	95.820	63.418	N/A	N/A	32.402	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/15 - 18:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1361 (CDD Mode)	

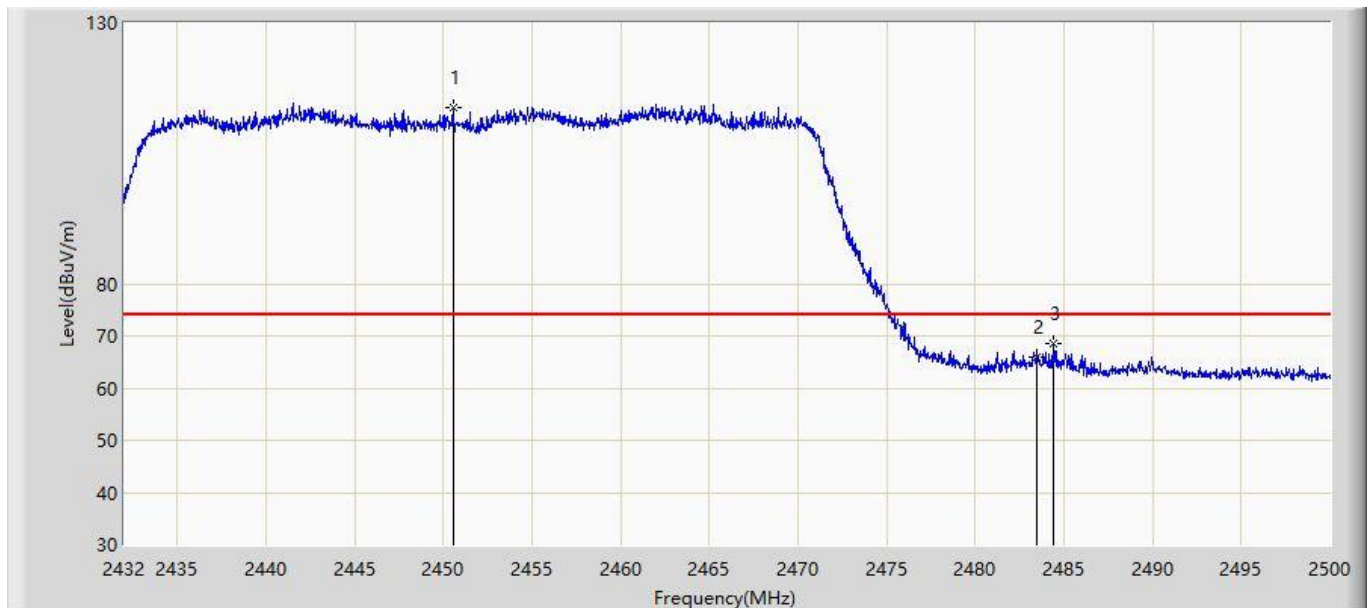


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.564	113.736	81.183	N/A	N/A	32.553	PK
2			2483.500	65.867	33.163	-8.133	74.000	32.704	PK
3			2484.428	68.501	35.792	-5.499	74.000	32.708	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/15 - 18:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1361 (CDD Mode)	

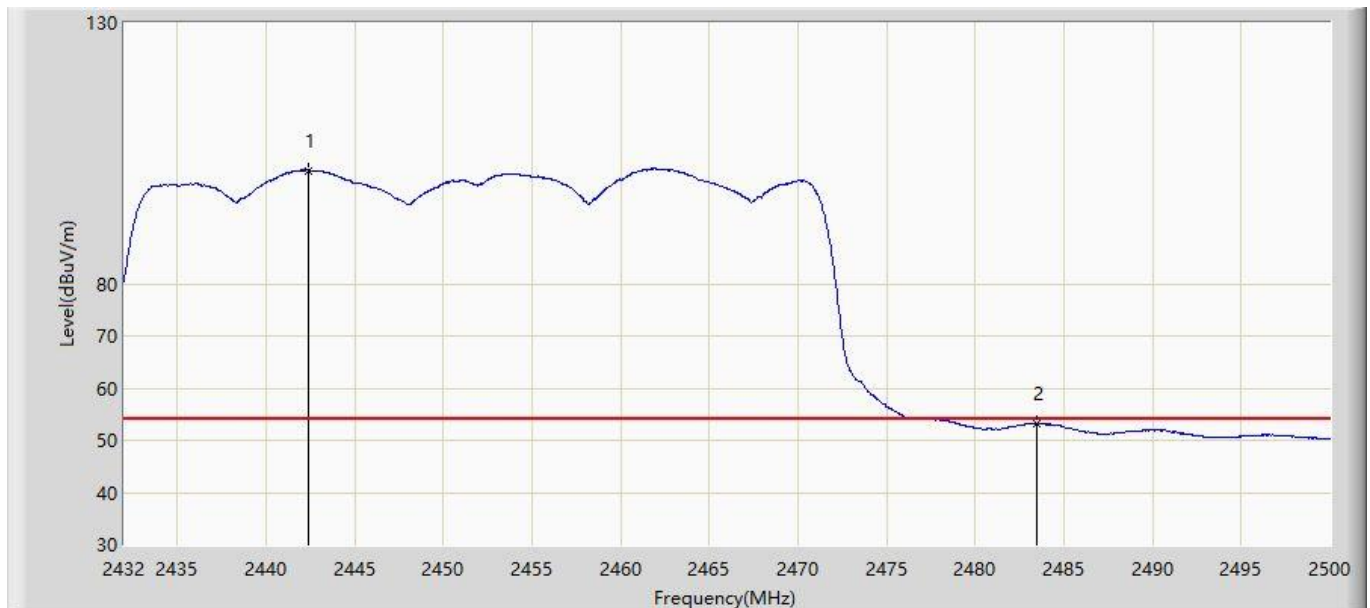


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2442.438	101.684	69.169	N/A	N/A	32.515	AV
2			2483.500	53.164	20.460	-0.836	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/15 - 18:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1361 (CDD Mode)	

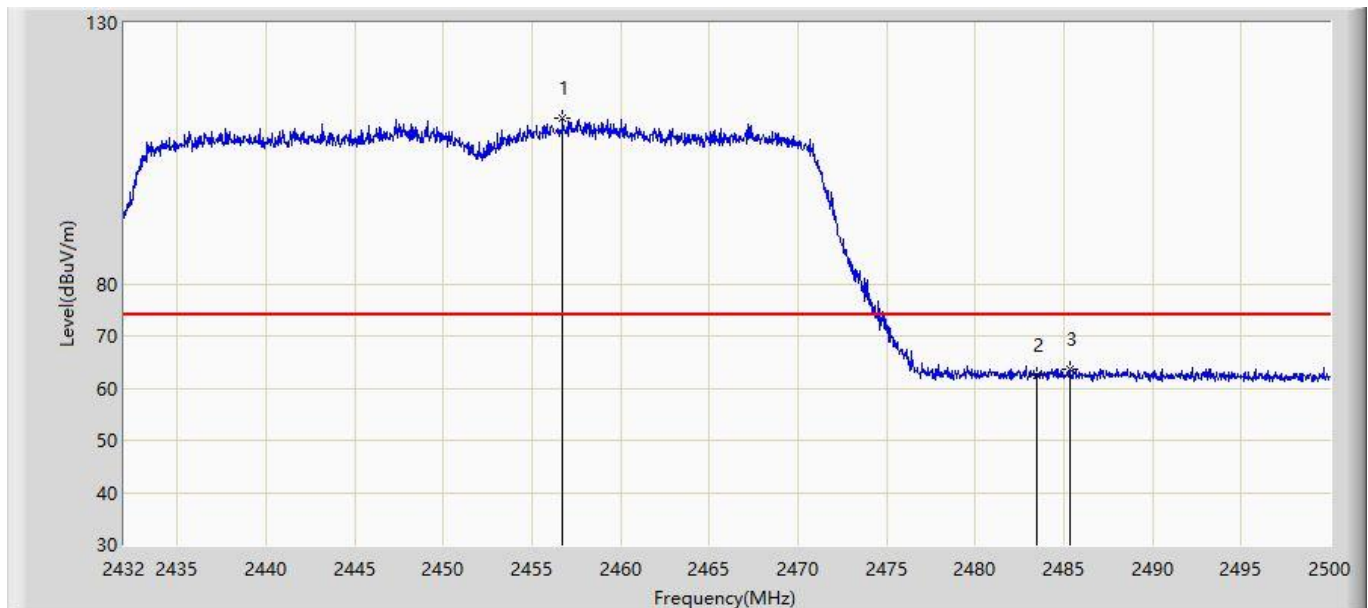


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.752	111.797	79.216	N/A	N/A	32.581	PK
2			2483.500	62.320	29.616	-11.680	74.000	32.704	PK
3			2485.312	63.698	30.985	-10.302	74.000	32.713	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/15 - 18:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1361 (CDD Mode)	

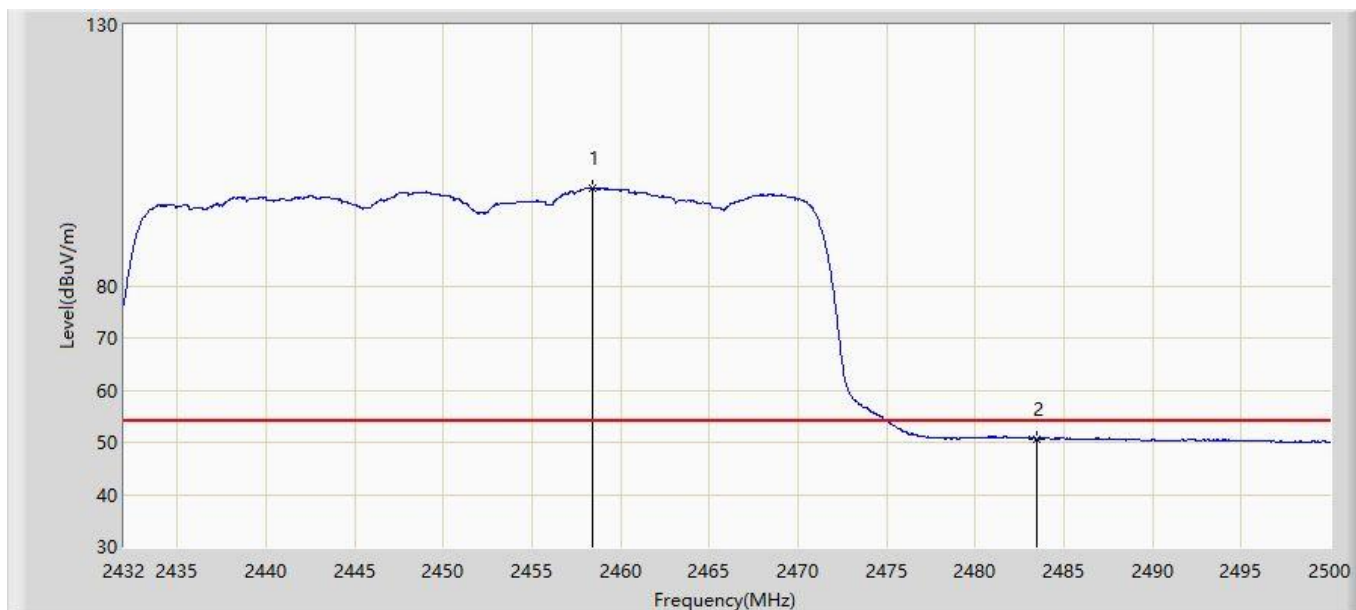


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.418	98.638	66.049	N/A	N/A	32.589	AV
2			2483.500	50.680	17.976	-3.320	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Mode No.: OAW-AP1361D

Site: AC1	Time: 2020/03/25 - 16:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

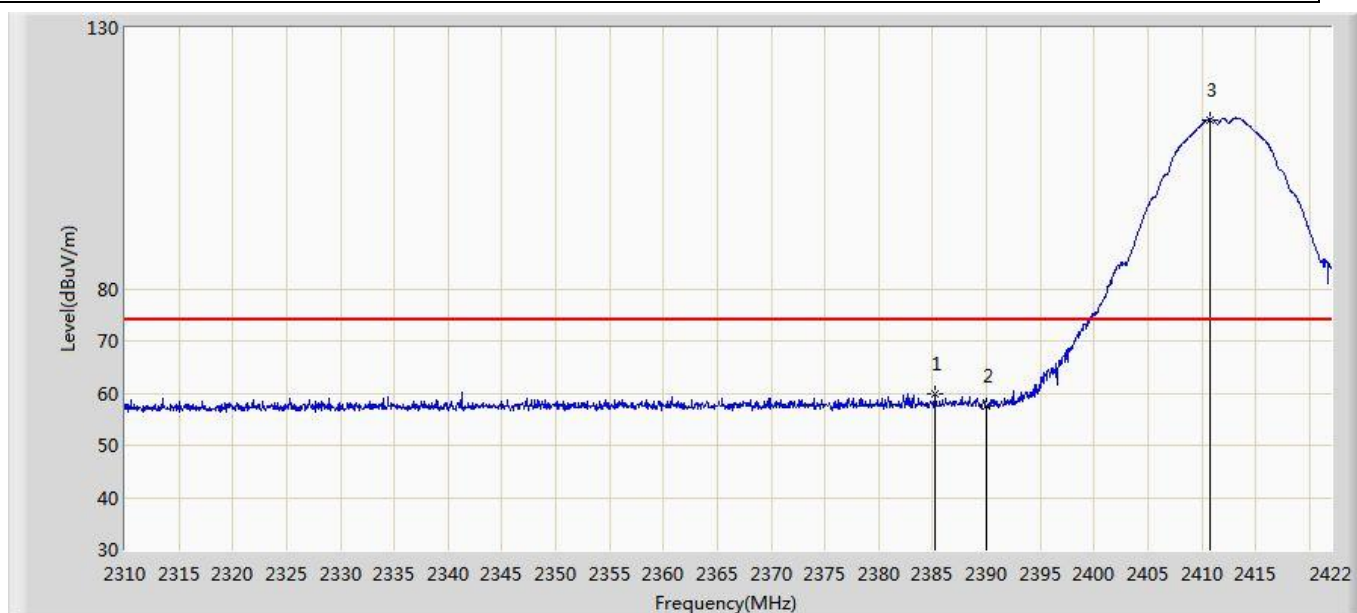


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.264	59.797	27.544	-14.203	74.000	32.252	PK
2			2390.000	57.569	25.295	-16.431	74.000	32.274	PK
3		*	2410.744	112.460	80.091	N/A	N/A	32.369	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

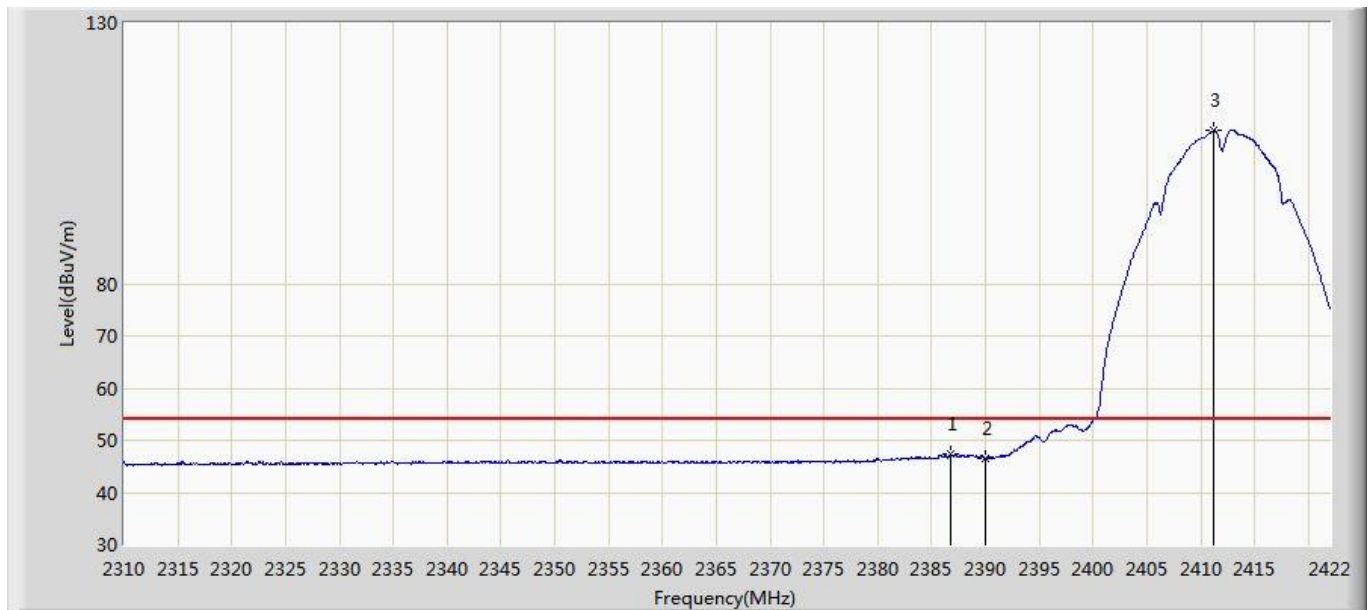


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.720	47.302	15.043	-6.698	54.000	32.259	AV
2			2390.000	46.656	14.382	-7.344	54.000	32.274	AV
3	X	*	2411.248	109.400	77.029	N/A	N/A	32.371	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

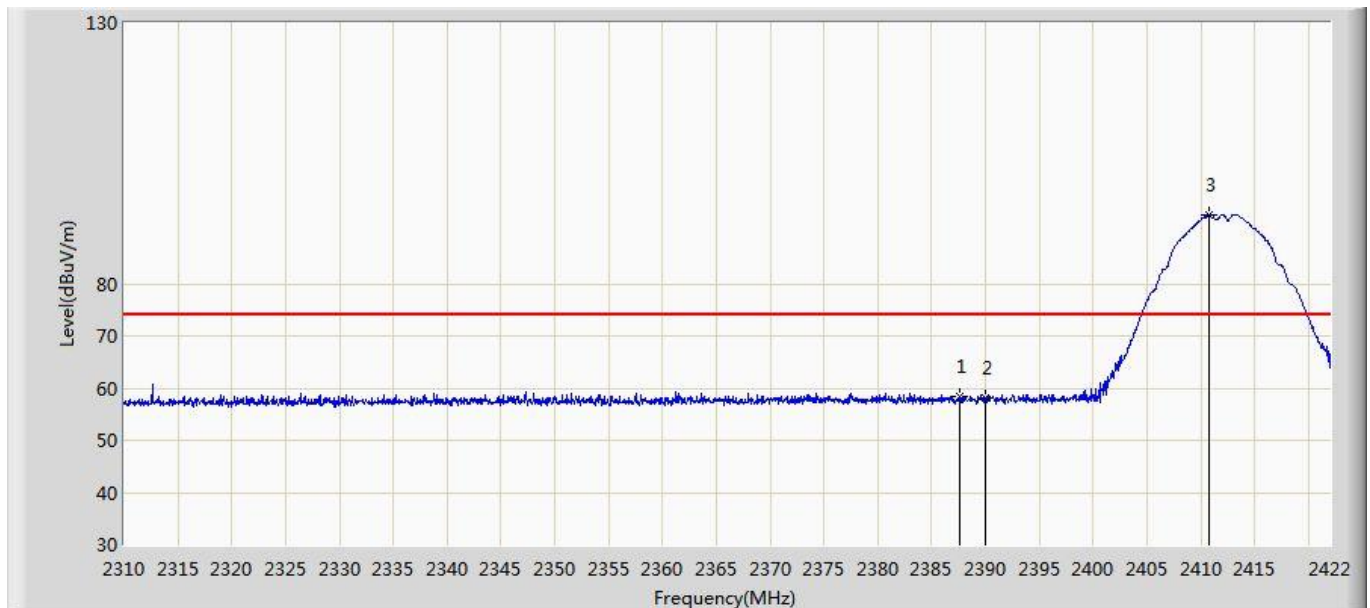


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.616	58.489	26.226	-15.511	74.000	32.263	PK
2			2390.000	58.131	25.857	-15.869	74.000	32.274	PK
3		*	2410.744	93.208	60.839	N/A	N/A	32.369	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

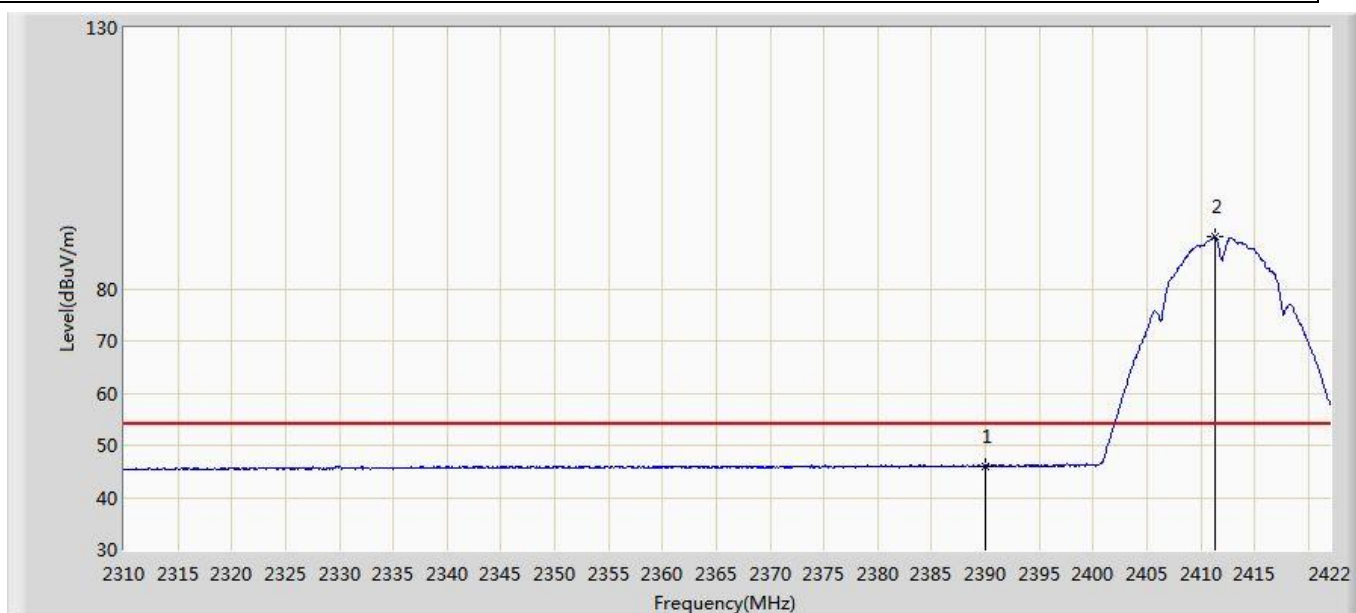


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.075	13.801	-7.925	54.000	32.274	AV
2		*	2411.304	89.918	57.547	N/A	N/A	32.371	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

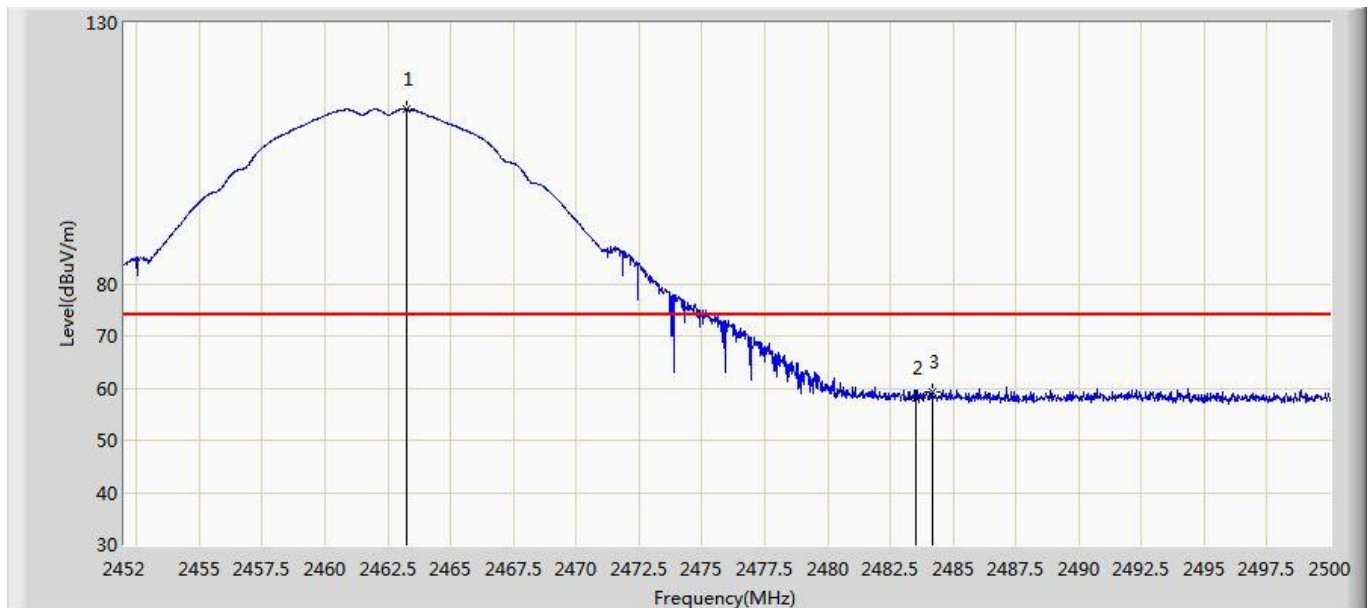


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.256	113.391	80.780	N/A	N/A	32.611	PK
2			2483.500	58.115	25.411	-15.885	74.000	32.704	PK
3			2484.160	59.412	26.705	-14.588	74.000	32.707	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

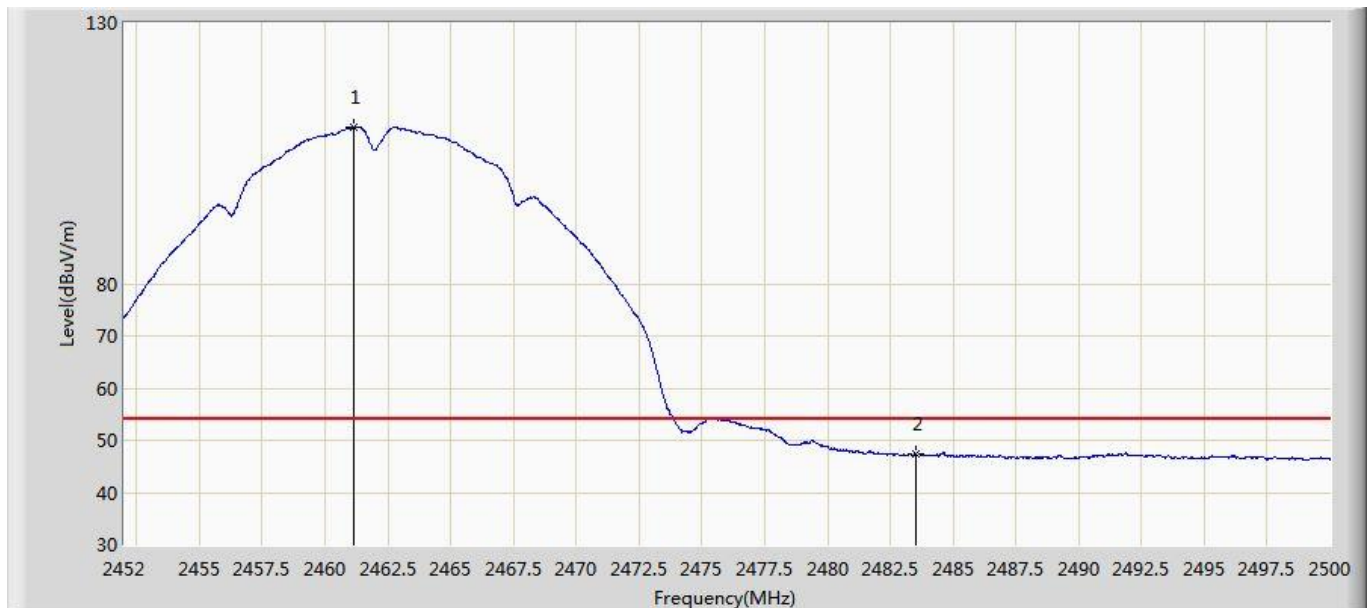


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2461.120	110.034	77.433	N/A	N/A	32.601	AV
2			2483.500	47.283	14.579	-6.717	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

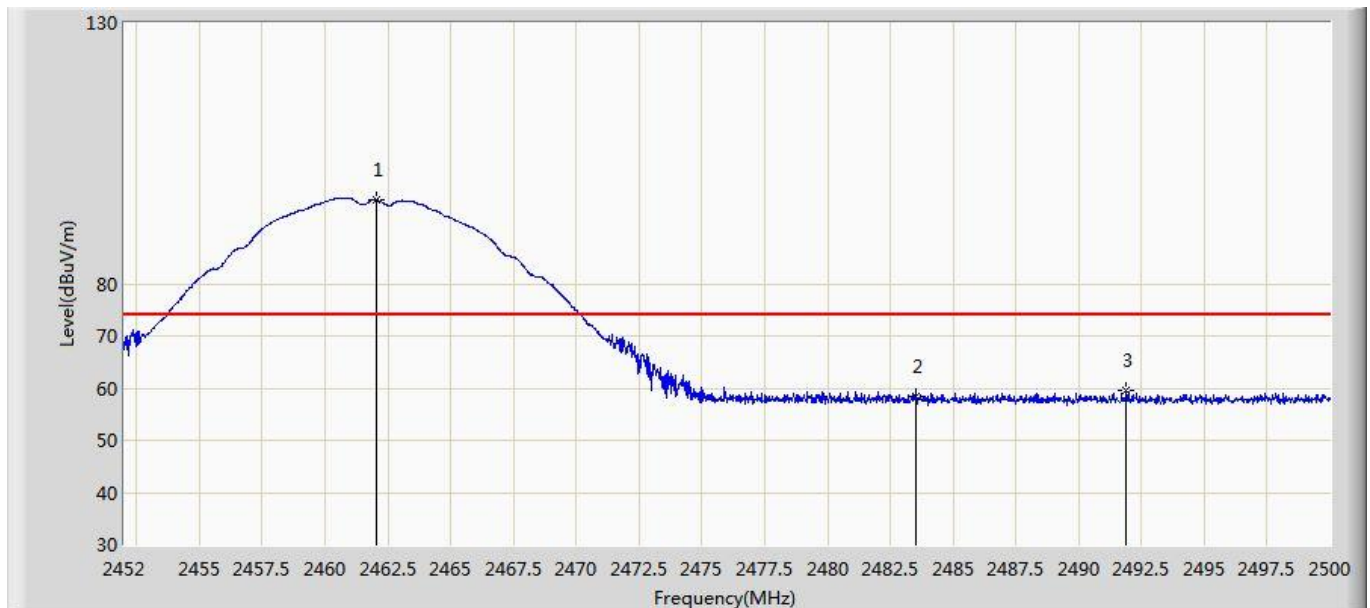


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.056	96.076	63.470	N/A	N/A	32.605	PK
2			2483.500	58.302	25.598	-15.698	74.000	32.704	PK
3			2491.888	59.602	26.860	-14.398	74.000	32.742	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

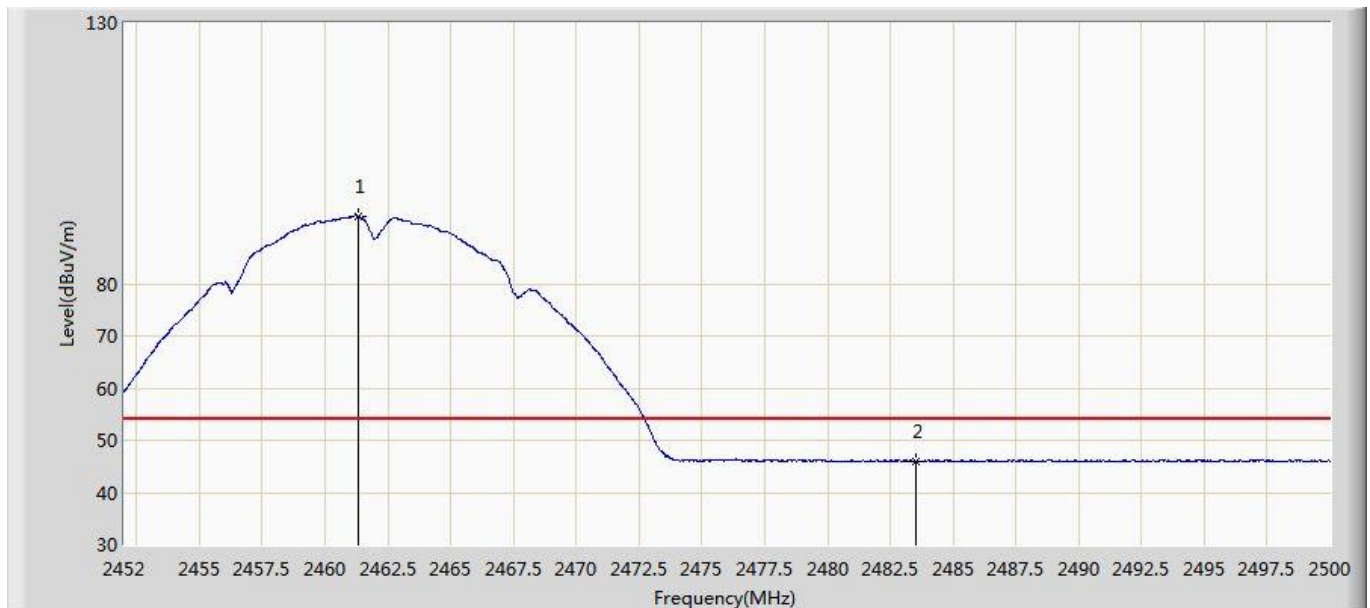


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.312	93.038	60.436	N/A	N/A	32.603	AV
2			2483.500	46.029	13.325	-7.971	54.000	32.704	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

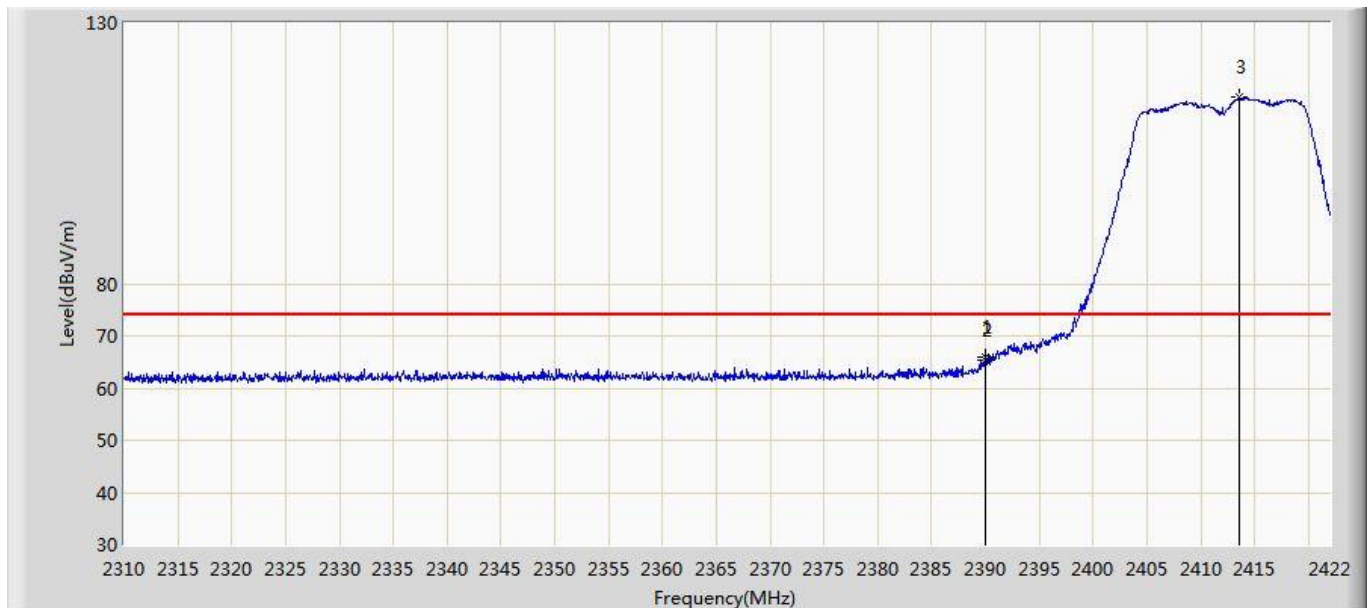


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	65.908	33.634	-8.092	74.000	32.274	PK
2			2390.000	65.219	32.945	-8.781	74.000	32.274	PK
3		*	2413.600	115.706	83.324	N/A	N/A	32.382	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

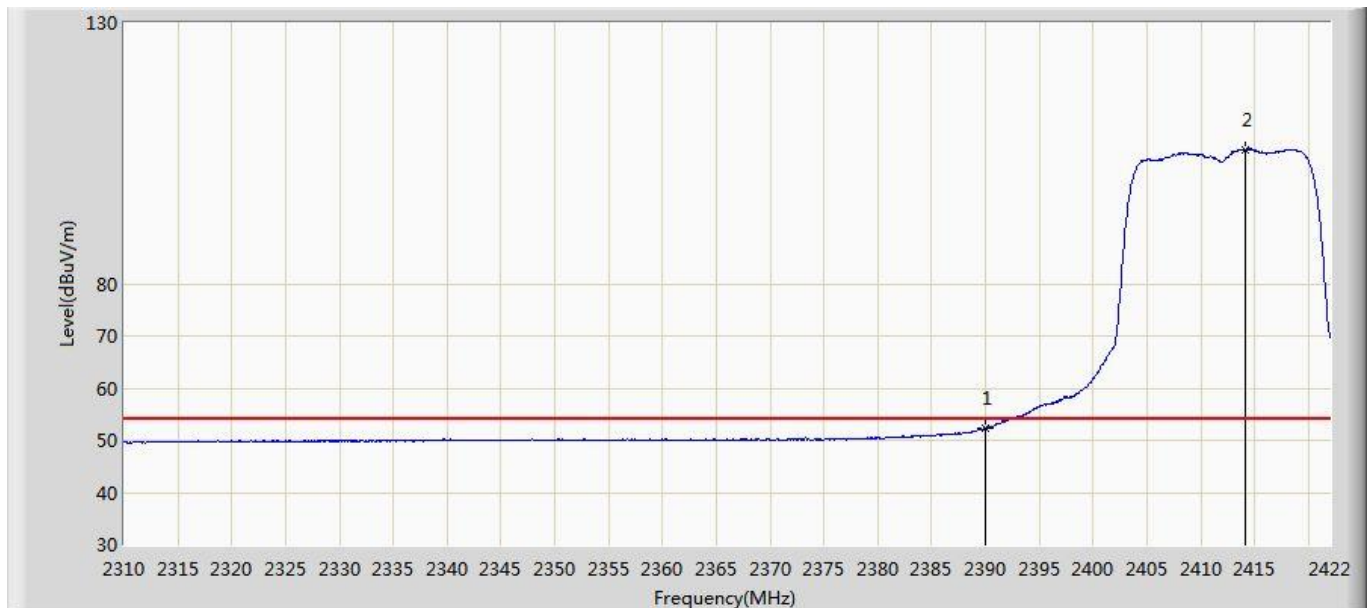


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.314	20.040	-1.686	54.000	32.274	AV
2		*	2414.104	105.685	73.301	N/A	N/A	32.385	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

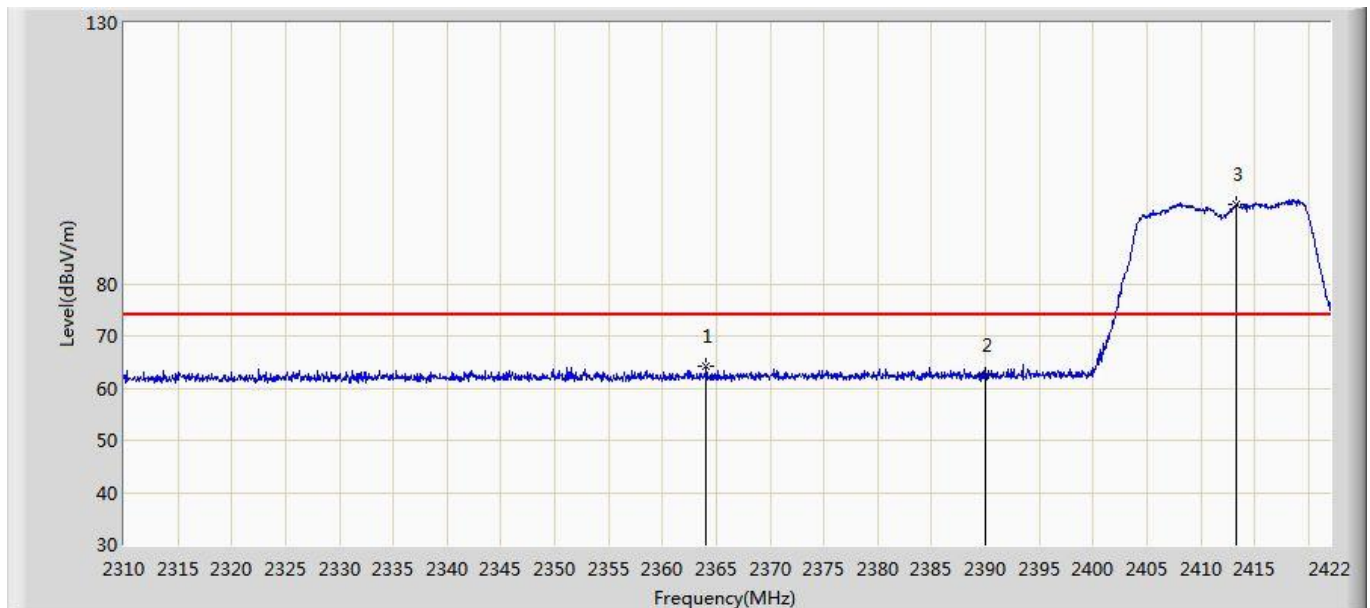


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2364.096	64.274	32.119	-9.726	74.000	32.155	PK
2			2390.000	62.366	30.092	-11.634	74.000	32.274	PK
3		*	2413.264	95.075	62.695	N/A	N/A	32.381	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

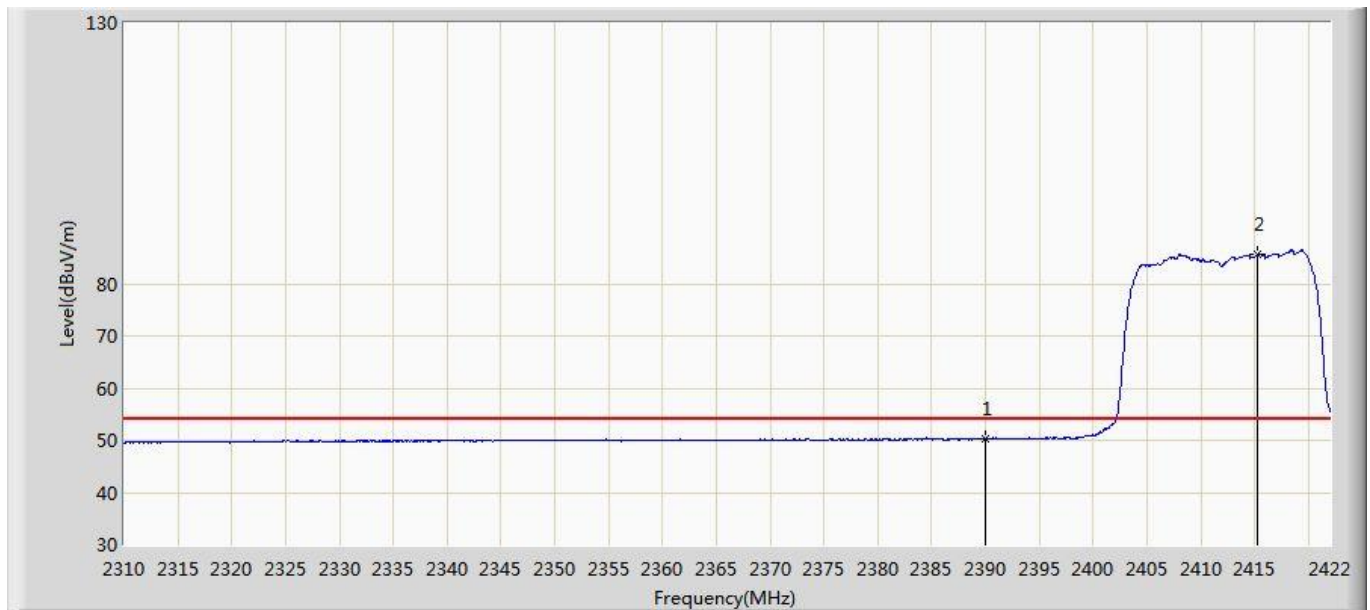


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.214	17.940	-3.786	54.000	32.274	AV
2		*	2415.280	85.588	53.198	N/A	N/A	32.390	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

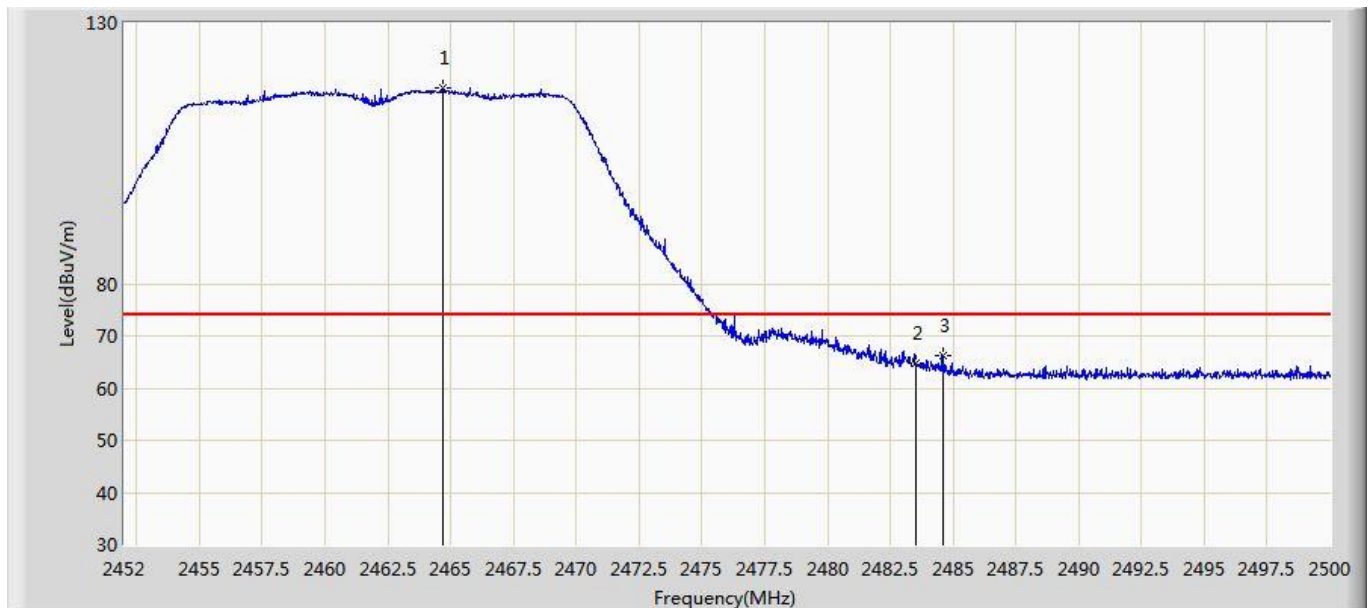


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.720	117.499	84.881	N/A	N/A	32.617	PK
2			2483.500	64.834	32.130	-9.166	74.000	32.704	PK
3			2484.616	66.257	33.547	-7.743	74.000	32.710	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

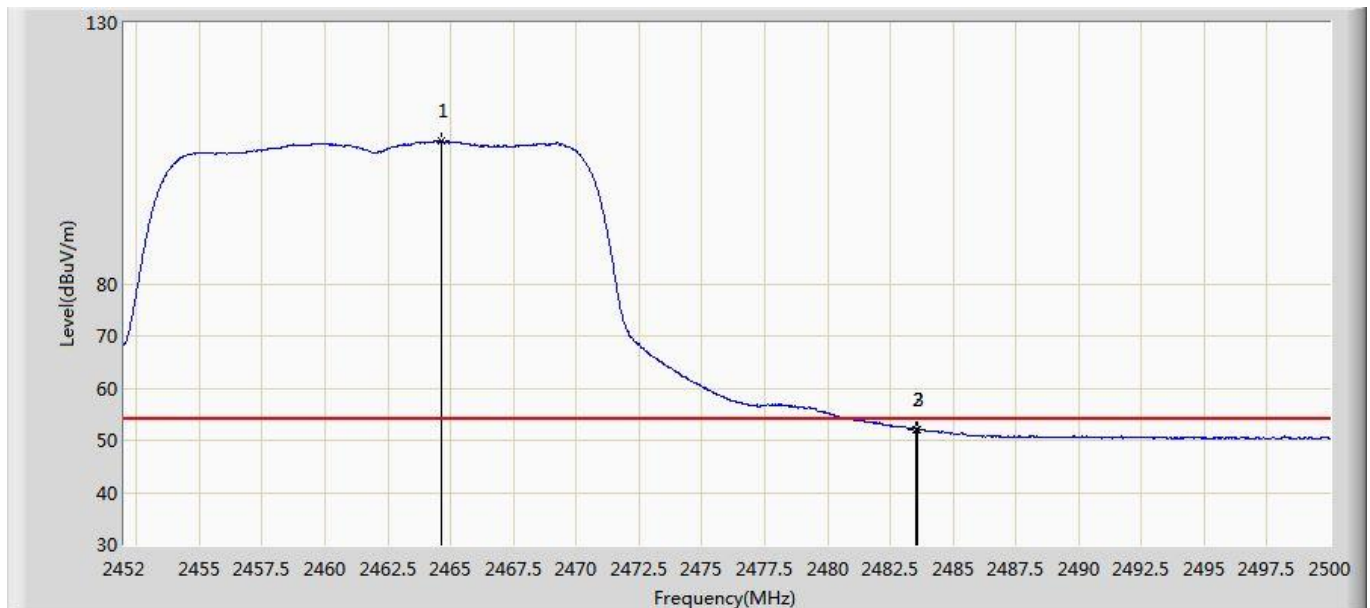


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.624	107.513	74.896	N/A	N/A	32.617	AV
2			2483.500	52.115	19.411	-1.885	54.000	32.704	AV
3			2483.608	52.163	19.458	-1.837	54.000	32.705	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

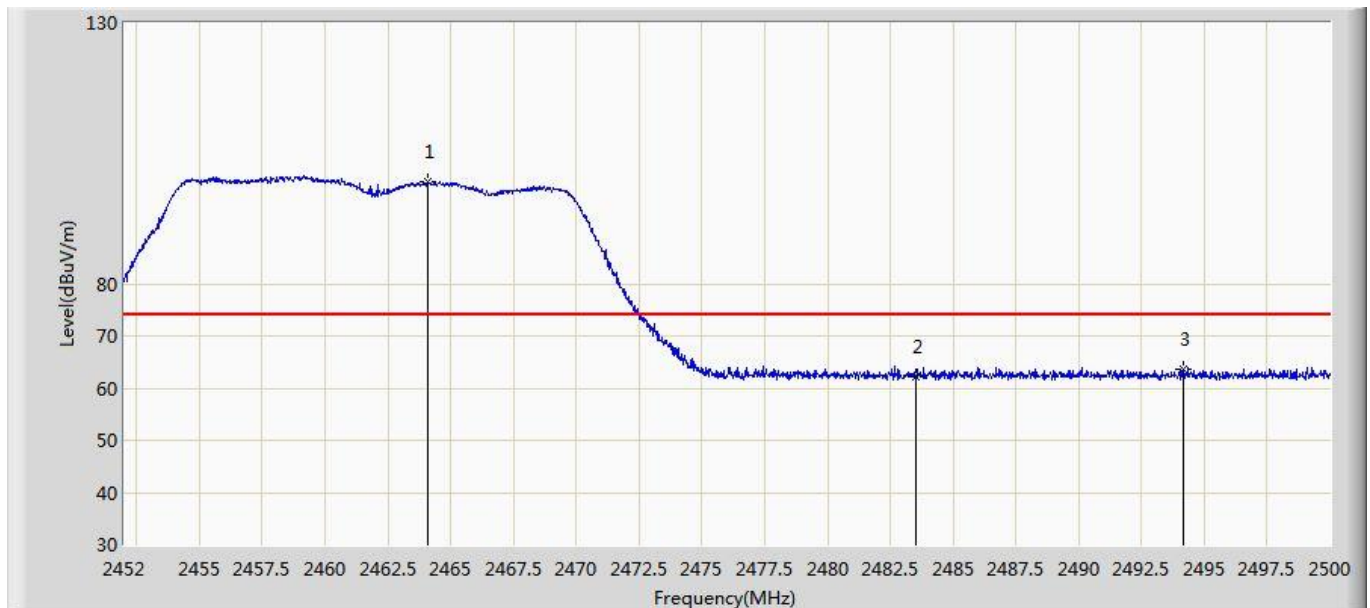


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.120	99.454	66.839	N/A	N/A	32.615	PK
2			2483.500	62.218	29.514	-11.782	74.000	32.704	PK
3			2494.144	63.740	30.987	-10.260	74.000	32.753	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

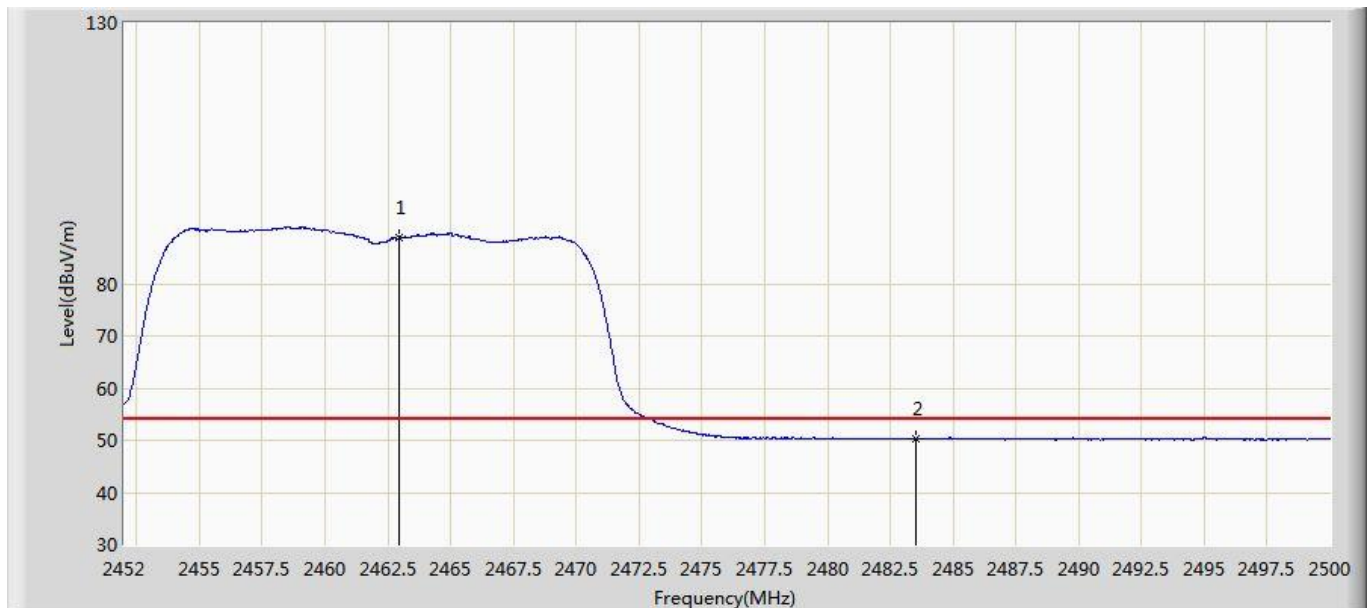


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.944	88.924	56.314	N/A	N/A	32.609	AV
2			2483.500	50.307	17.603	-3.693	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

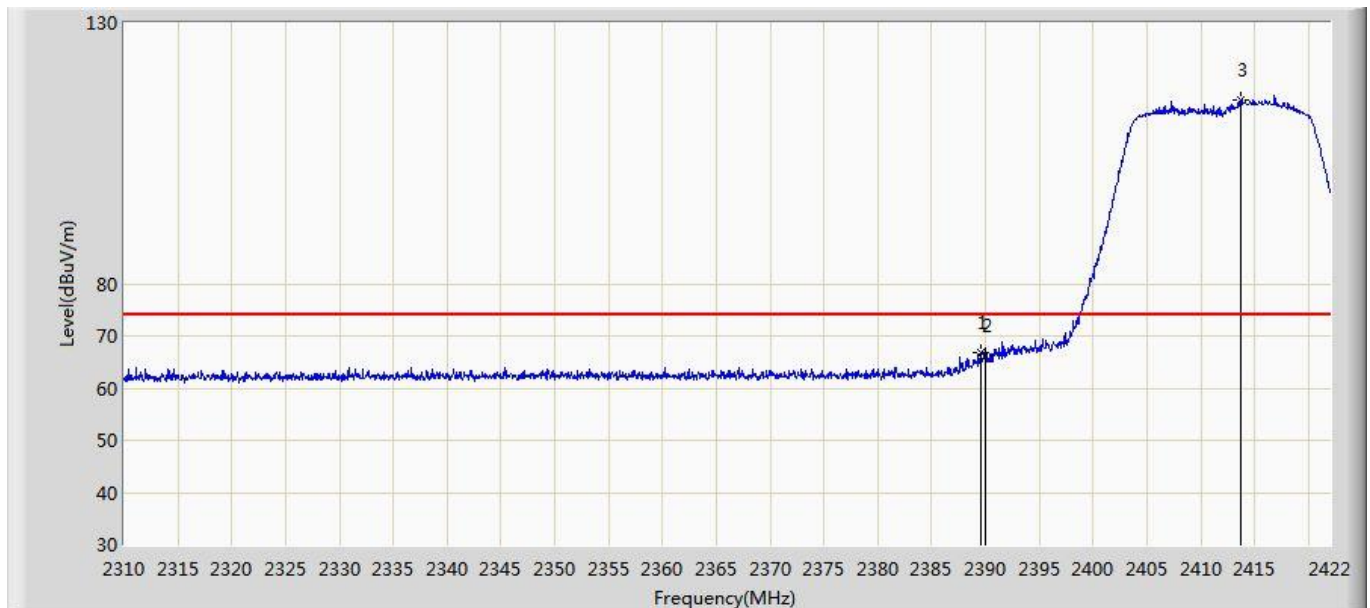


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.576	66.743	34.471	-7.257	74.000	32.273	PK
2			2390.000	66.092	33.818	-7.908	74.000	32.274	PK
3		*	2413.768	115.264	82.881	N/A	N/A	32.382	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

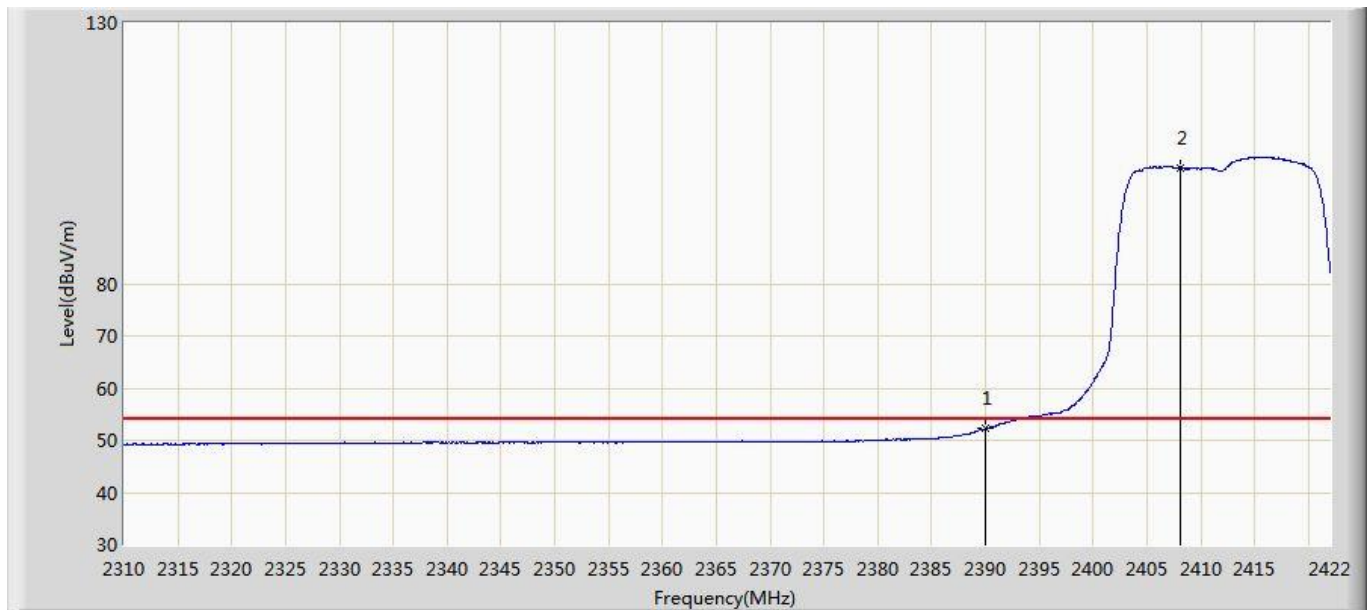


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.281	20.007	-1.719	54.000	32.274	AV
2		*	2408.168	102.289	69.932	N/A	N/A	32.358	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

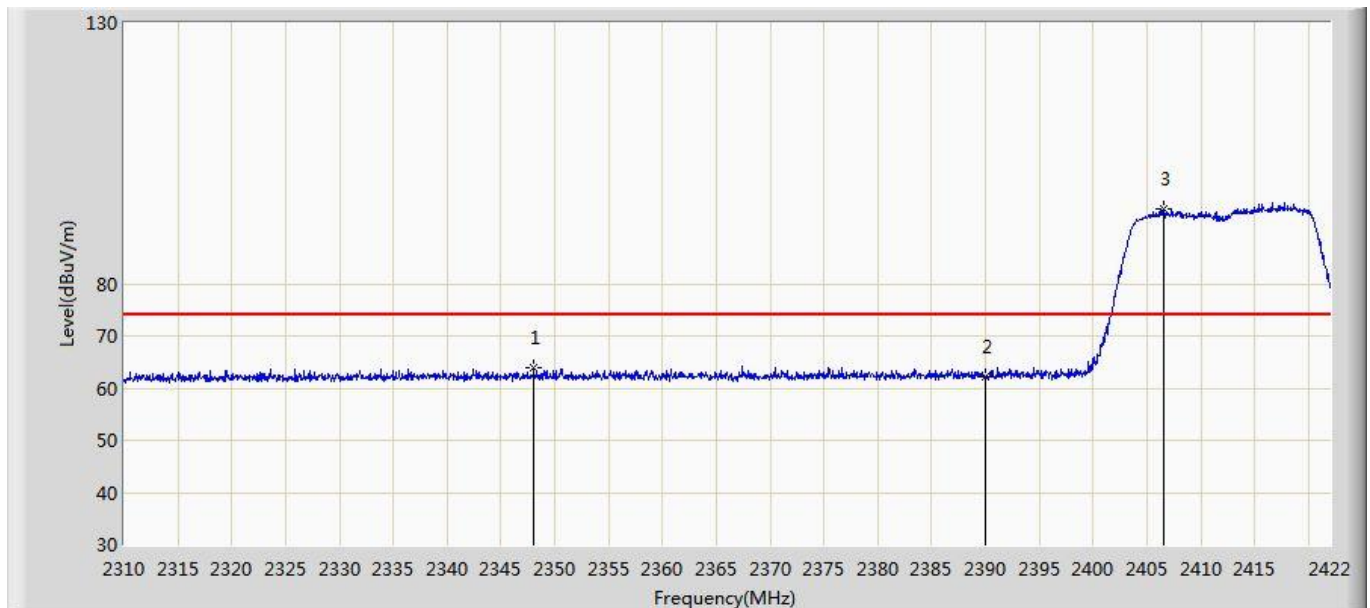

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2348.024	63.908	31.827	-10.092	74.000	32.081	PK
2			2390.000	62.095	29.821	-11.905	74.000	32.274	PK
3		*	2406.544	94.396	62.046	N/A	N/A	32.350	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.942	17.668	-4.058	54.000	32.274	AV
2		*	2413.656	83.935	51.553	N/A	N/A	32.382	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

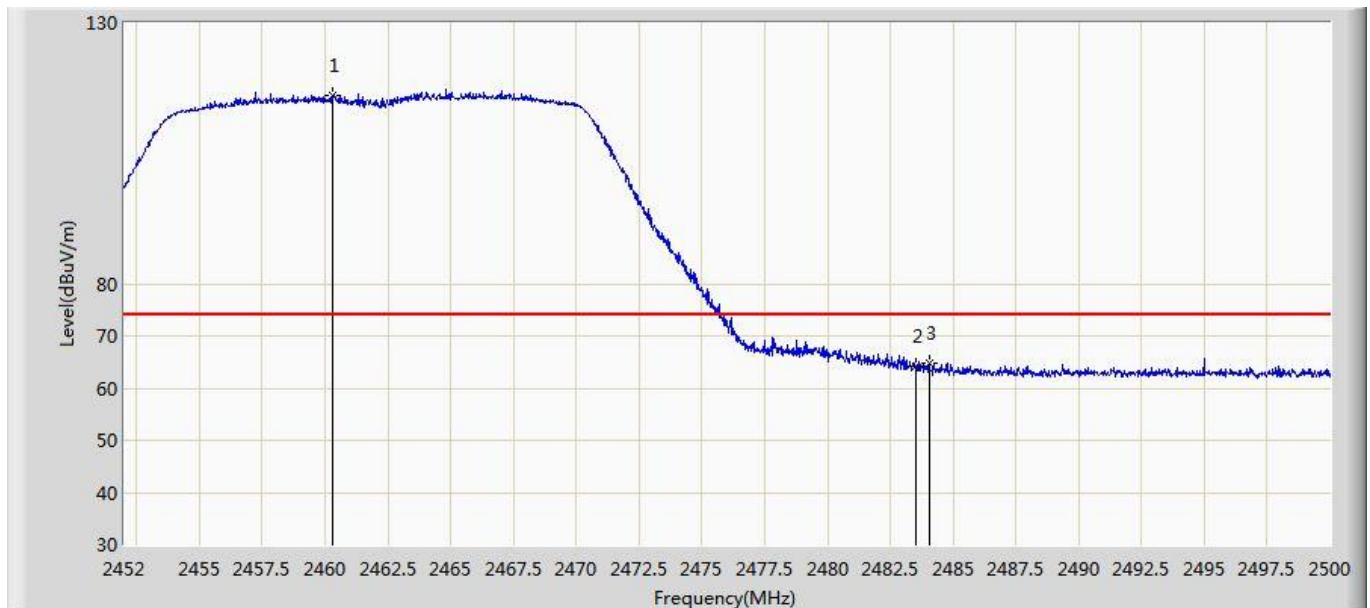


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.280	116.229	83.632	N/A	N/A	32.597	PK
2			2483.500	64.171	31.467	-9.829	74.000	32.704	PK
3			2484.040	64.789	32.082	-9.211	74.000	32.707	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

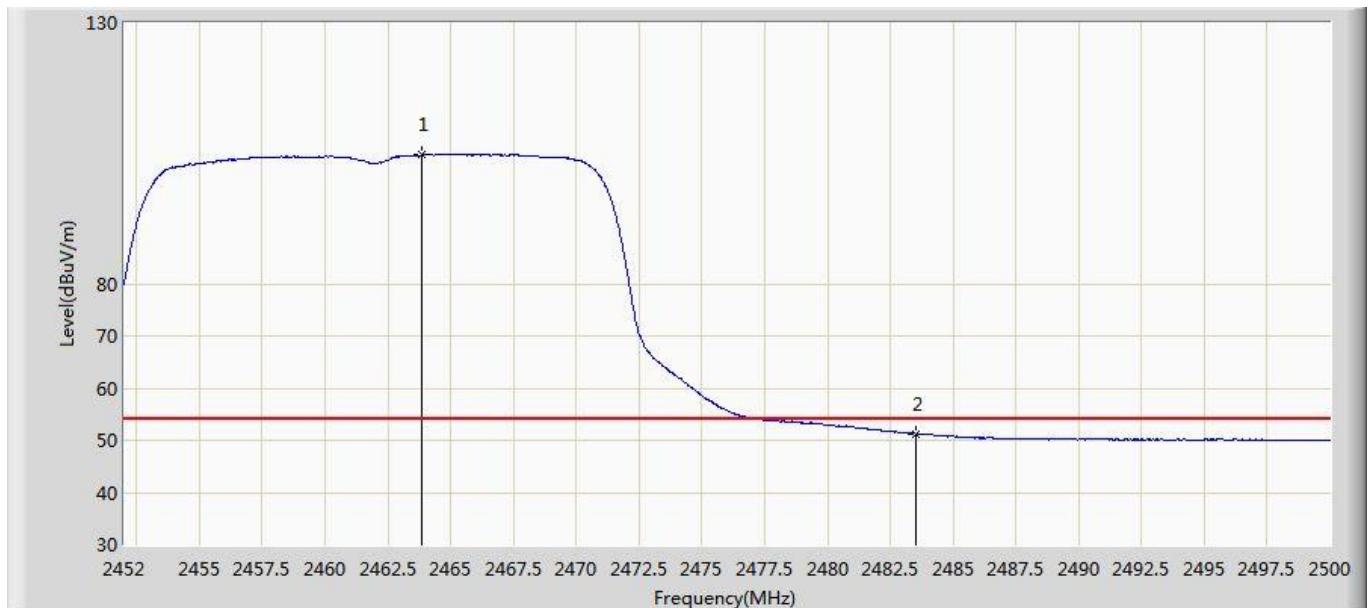


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.856	104.701	72.087	N/A	N/A	32.613	AV
2			2483.500	51.238	18.534	-2.762	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

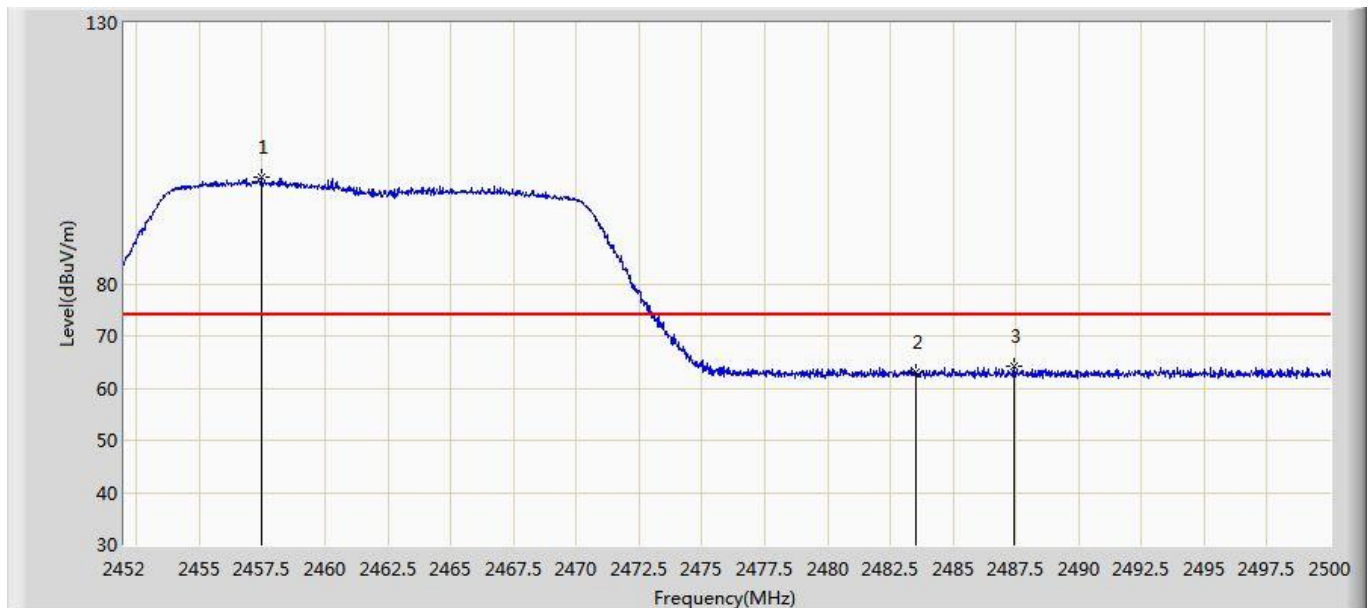


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.448	100.360	67.776	N/A	N/A	32.584	PK
2			2483.500	63.096	30.392	-10.904	74.000	32.704	PK
3			2487.400	64.276	31.554	-9.724	74.000	32.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

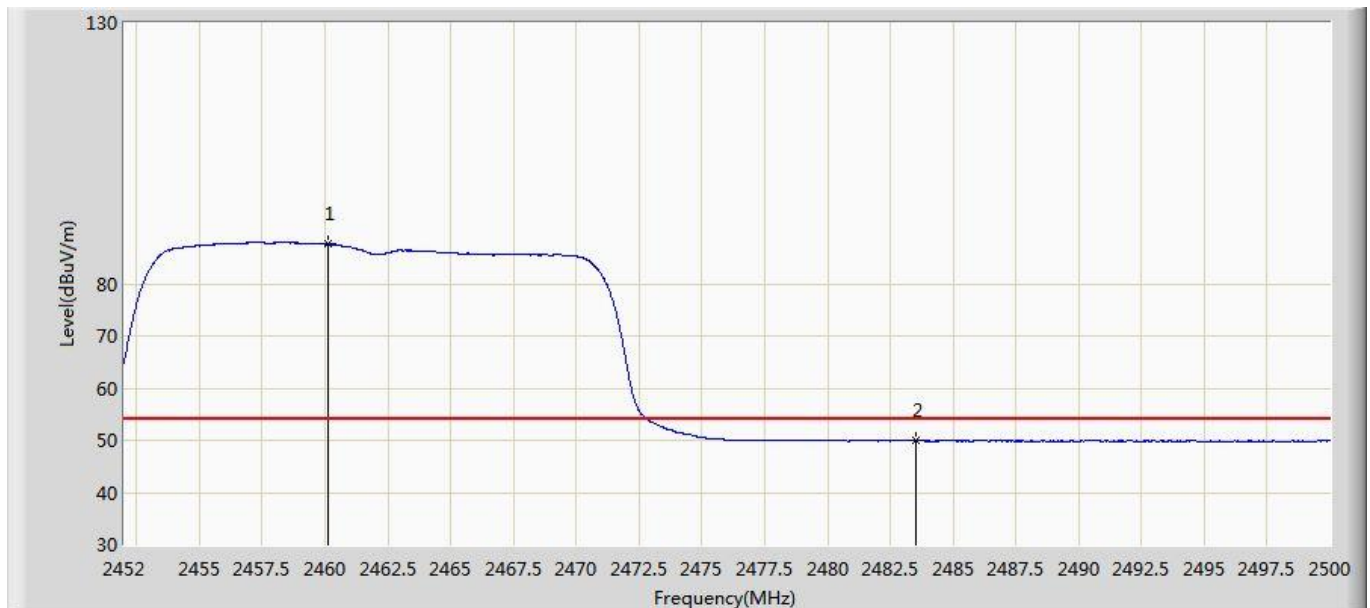


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.136	87.630	55.033	N/A	N/A	32.597	AV
2			2483.500	49.873	17.169	-4.127	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

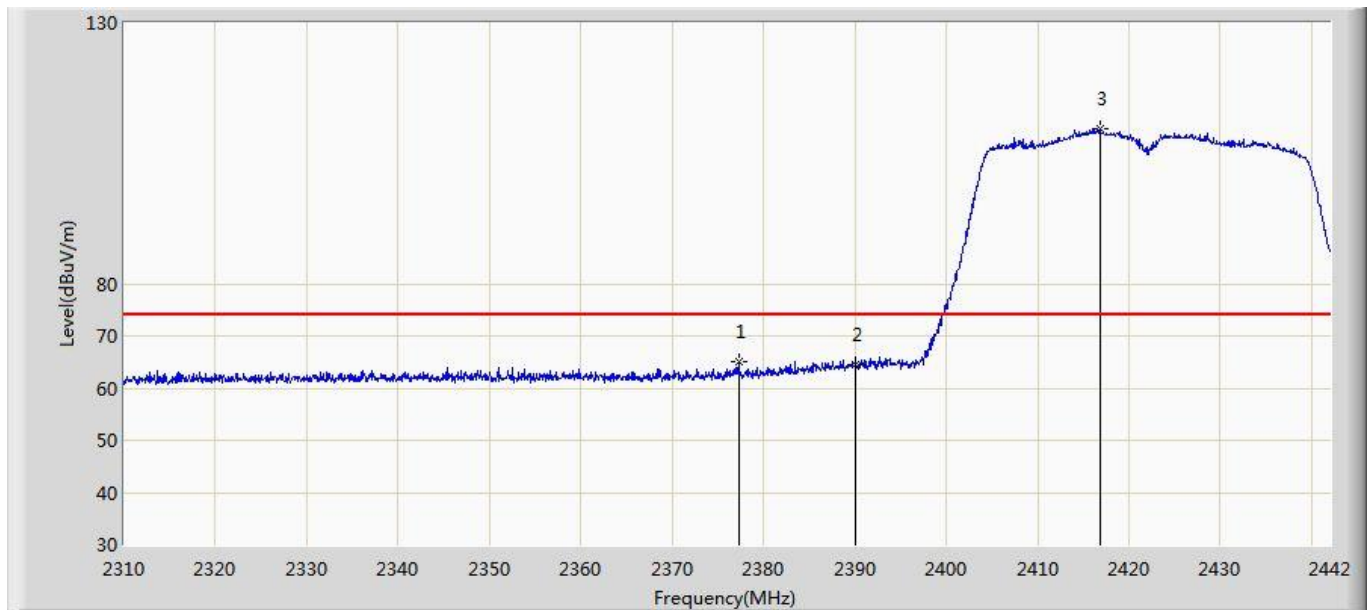


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2377.254	64.979	32.764	-9.021	74.000	32.216	PK
2			2390.000	64.579	32.305	-9.421	74.000	32.274	PK
3		*	2416.854	109.632	77.235	N/A	N/A	32.397	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 16:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

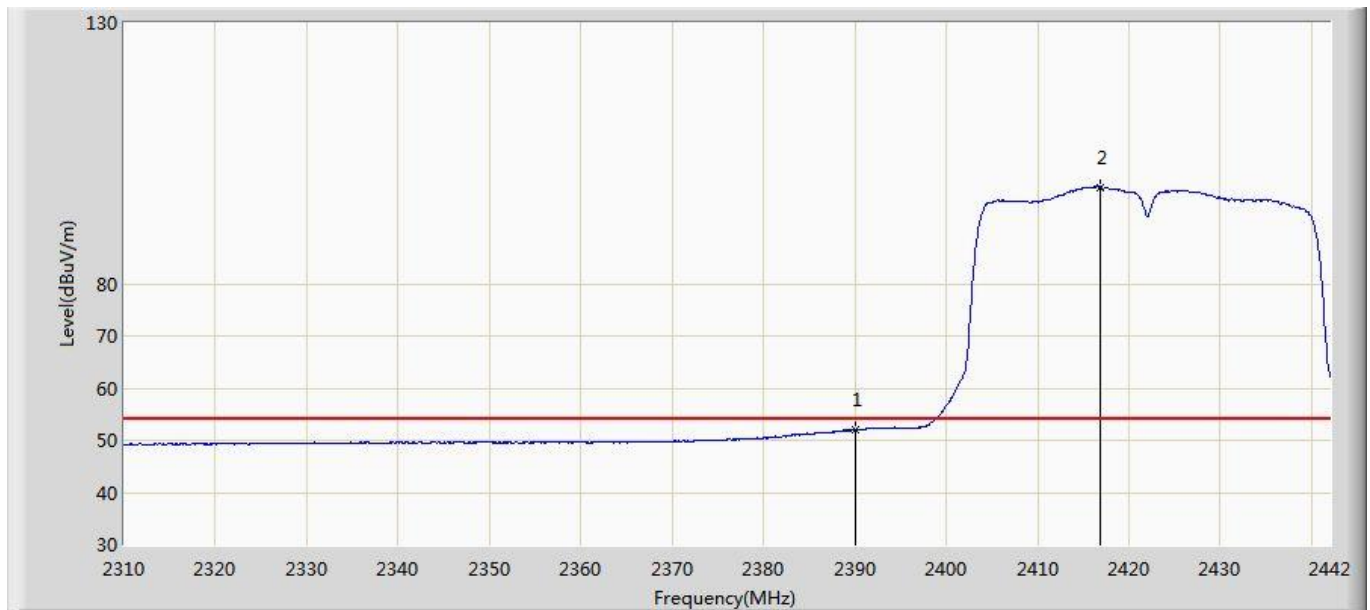


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.998	19.724	-2.002	54.000	32.274	AV
2		*	2416.854	98.512	66.115	N/A	N/A	32.397	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

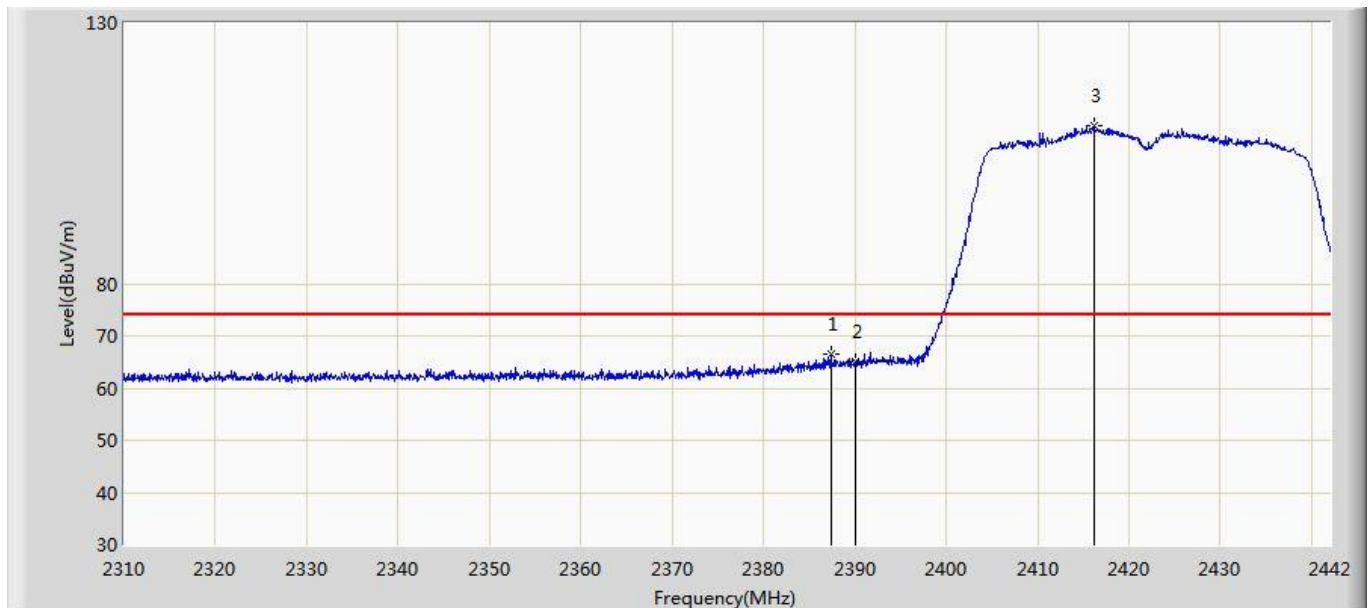


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.418	66.414	34.152	-7.586	74.000	32.263	PK
2			2390.000	65.165	32.891	-8.835	74.000	32.274	PK
3		*	2416.194	110.404	78.010	N/A	N/A	32.394	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

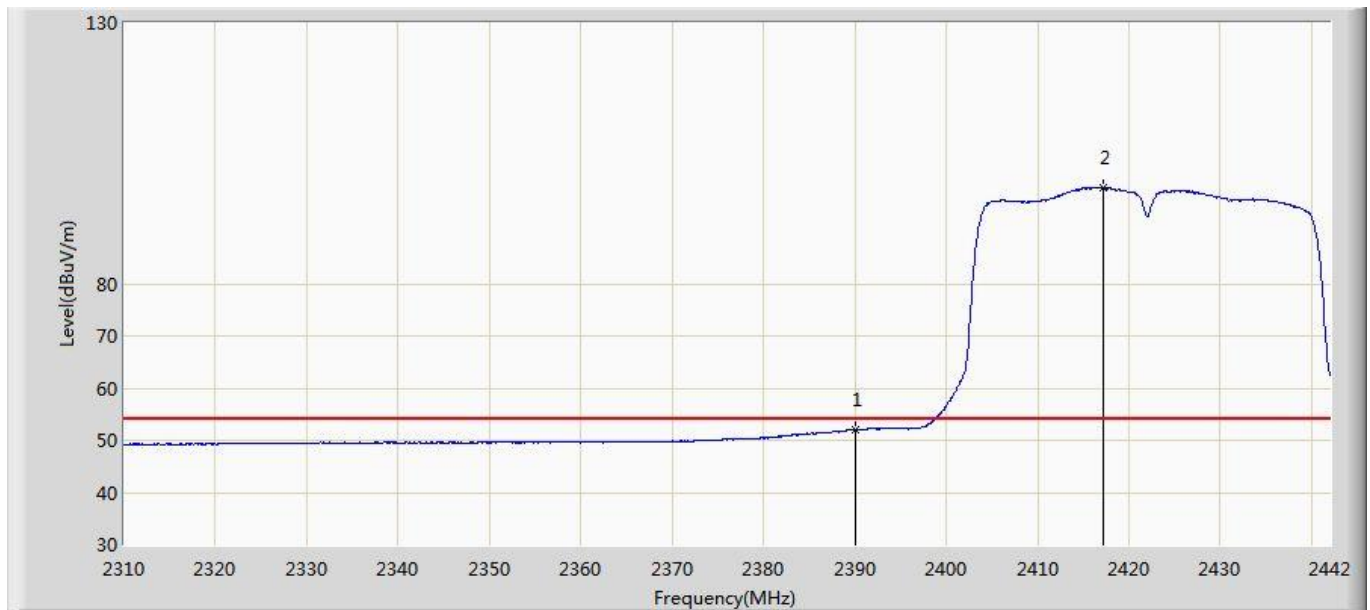


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.977	19.703	-2.023	54.000	32.274	AV
2		*	2417.118	98.478	66.080	N/A	N/A	32.398	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

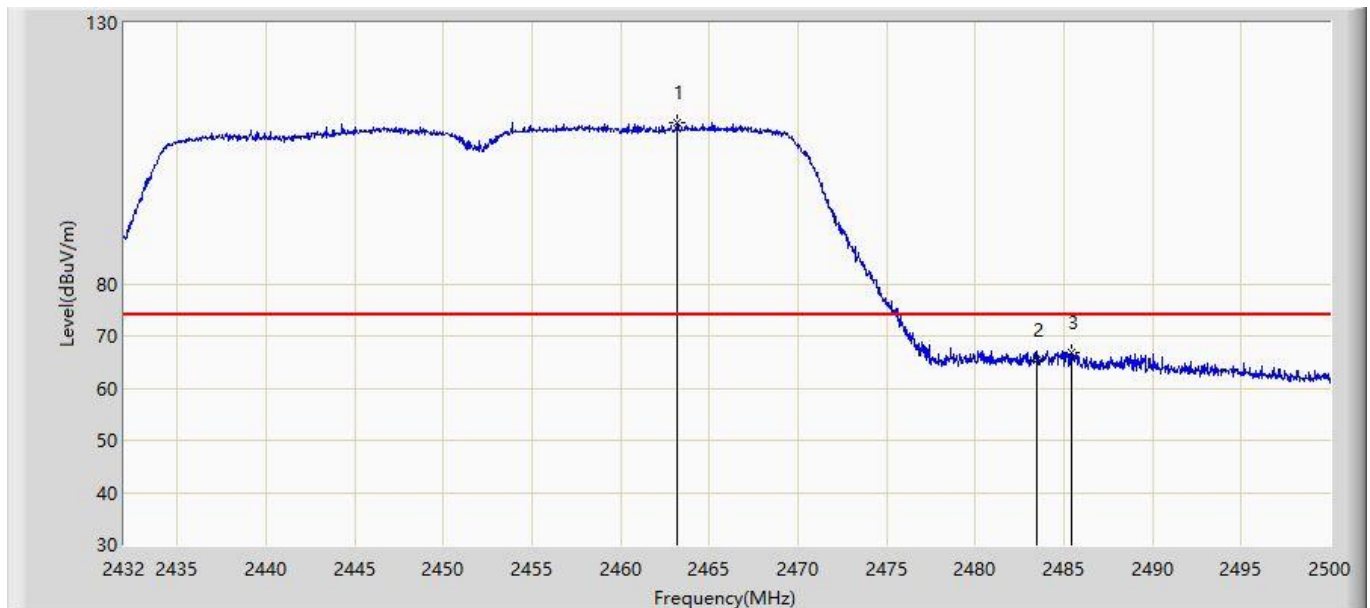


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.178	110.888	78.277	N/A	N/A	32.611	PK
2			2483.500	65.246	32.542	-8.754	74.000	32.704	PK
3			2485.448	66.951	34.238	-7.049	74.000	32.714	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

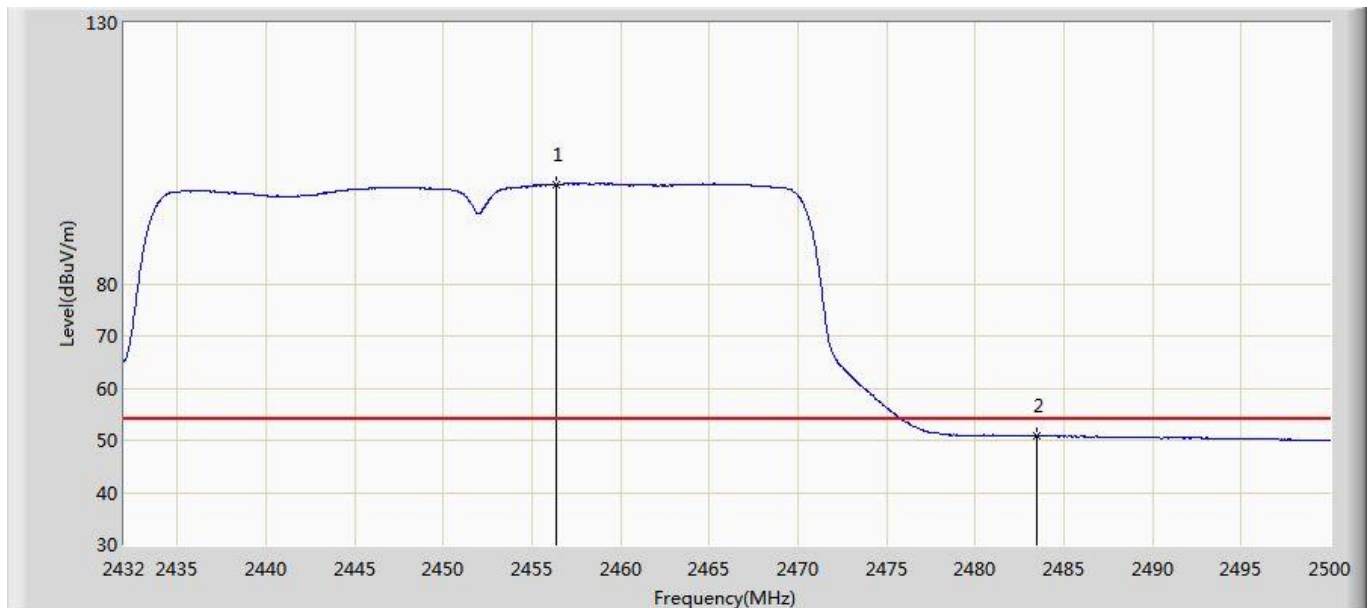


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.378	99.108	66.528	N/A	N/A	32.580	AV
2			2483.500	50.764	18.060	-3.236	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

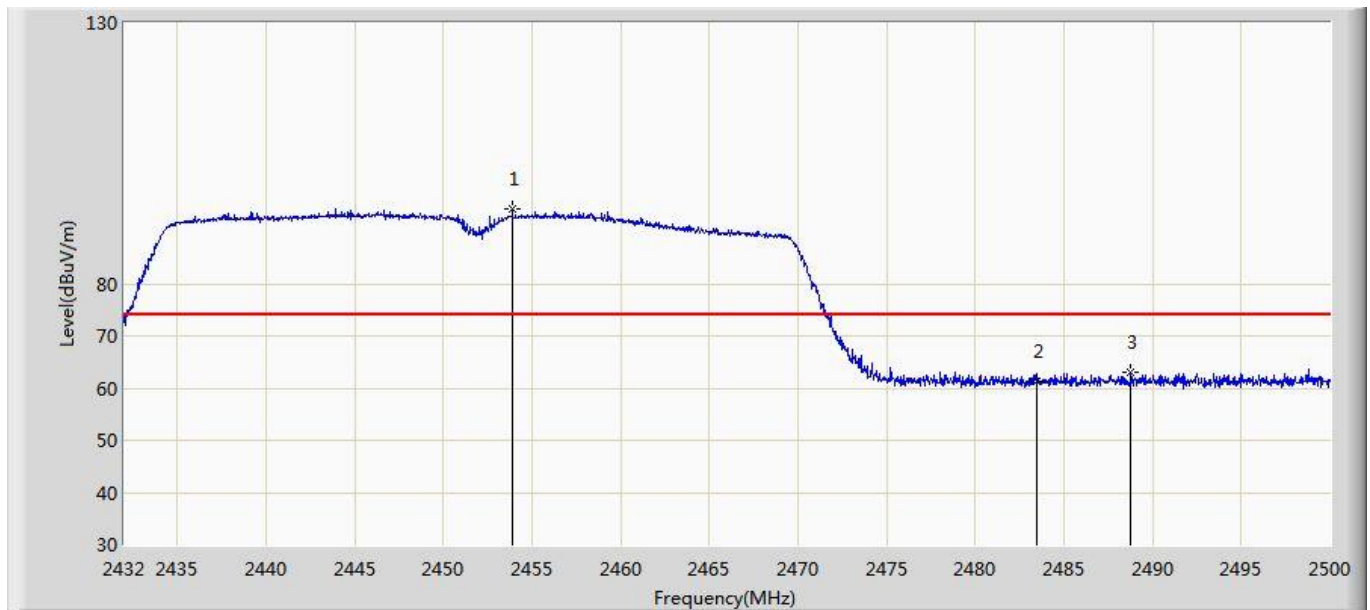


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.896	94.244	61.676	N/A	N/A	32.568	PK
2			2483.500	61.259	28.555	-12.741	74.000	32.704	PK
3			2488.746	63.116	30.388	-10.884	74.000	32.729	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

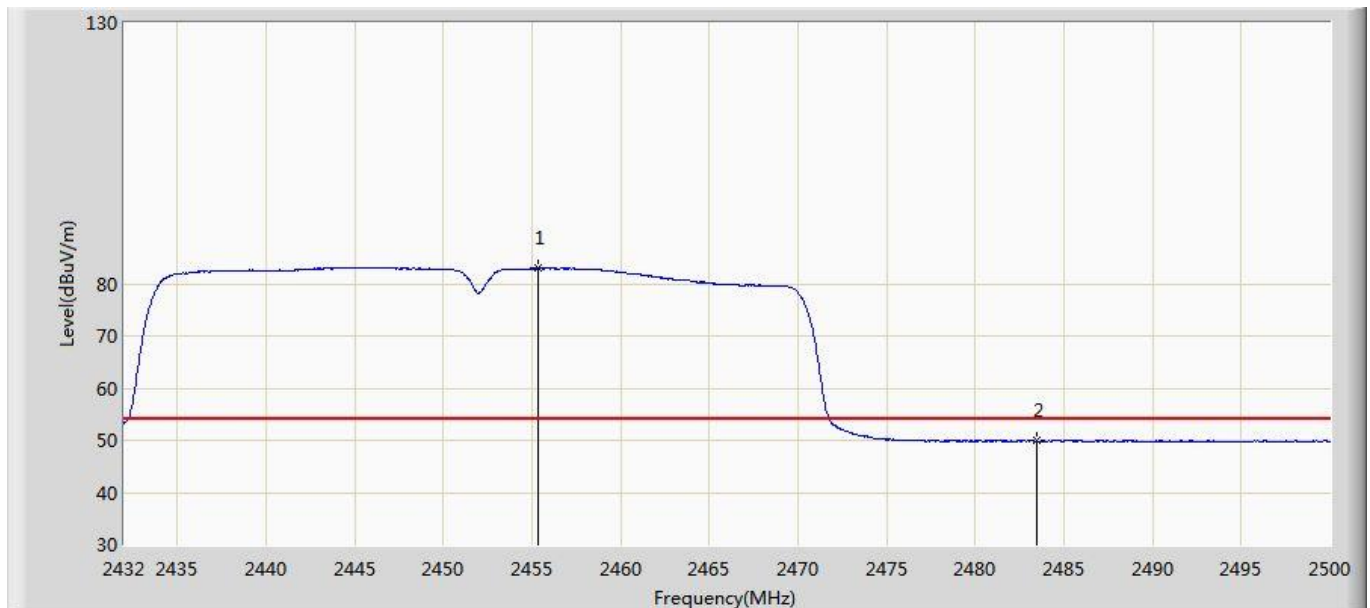


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.358	83.035	50.460	N/A	N/A	32.575	AV
2			2483.500	49.876	17.172	-4.124	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

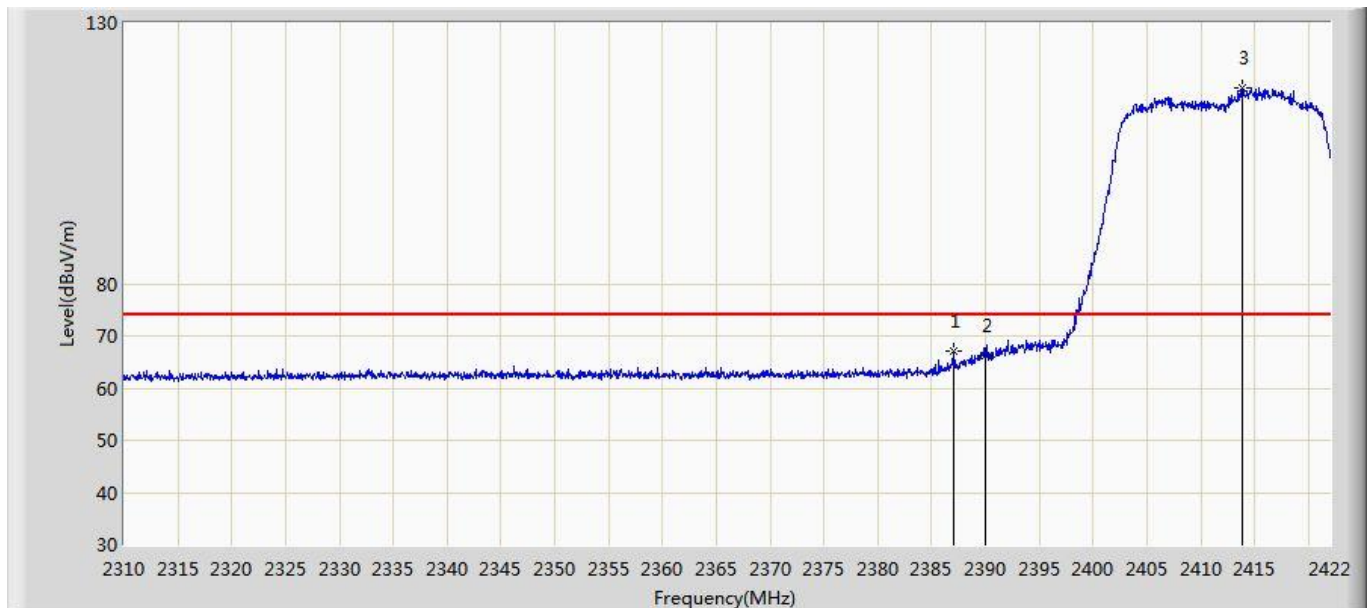


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.000	66.984	34.723	-7.016	74.000	32.260	PK
2			2390.000	66.284	34.010	-7.716	74.000	32.274	PK
3		*	2413.824	117.418	85.035	N/A	N/A	32.383	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

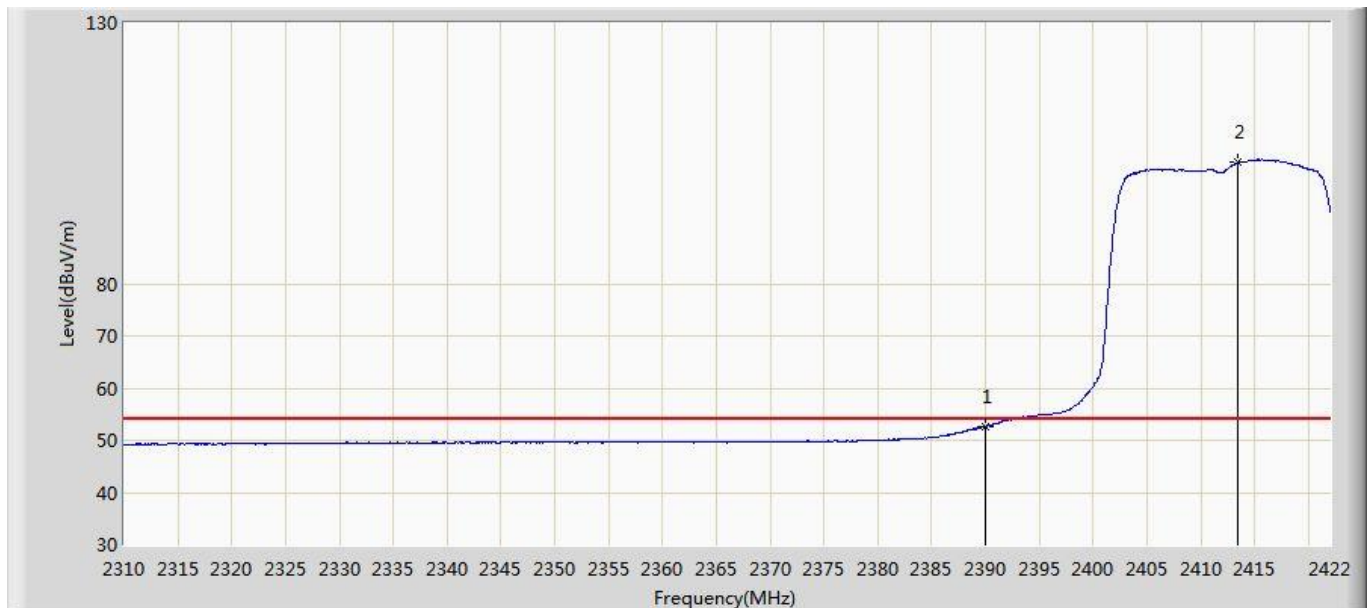


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.677	20.403	-1.323	54.000	32.274	AV
2		*	2413.488	103.190	70.809	N/A	N/A	32.381	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

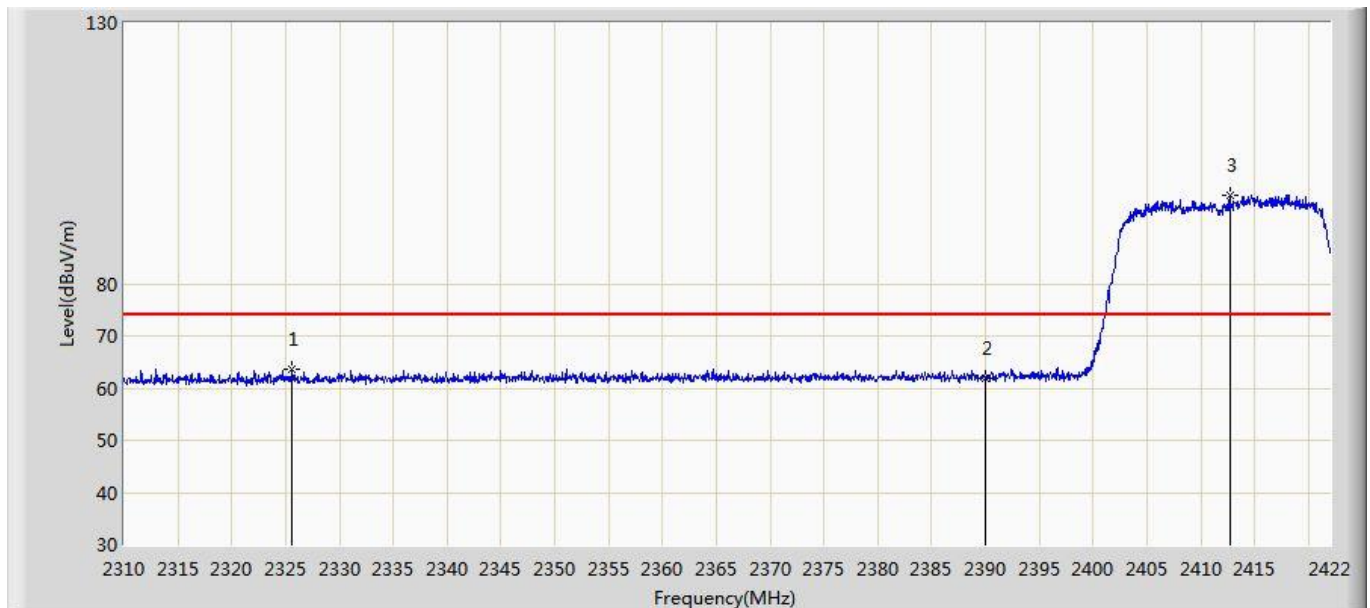


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2325.624	63.548	31.571	-10.452	74.000	31.977	PK
2			2390.000	61.905	29.631	-12.095	74.000	32.274	PK
3		*	2412.704	97.037	64.659	N/A	N/A	32.378	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412 MHz with OAW-AP1361D (CDD Mode)	

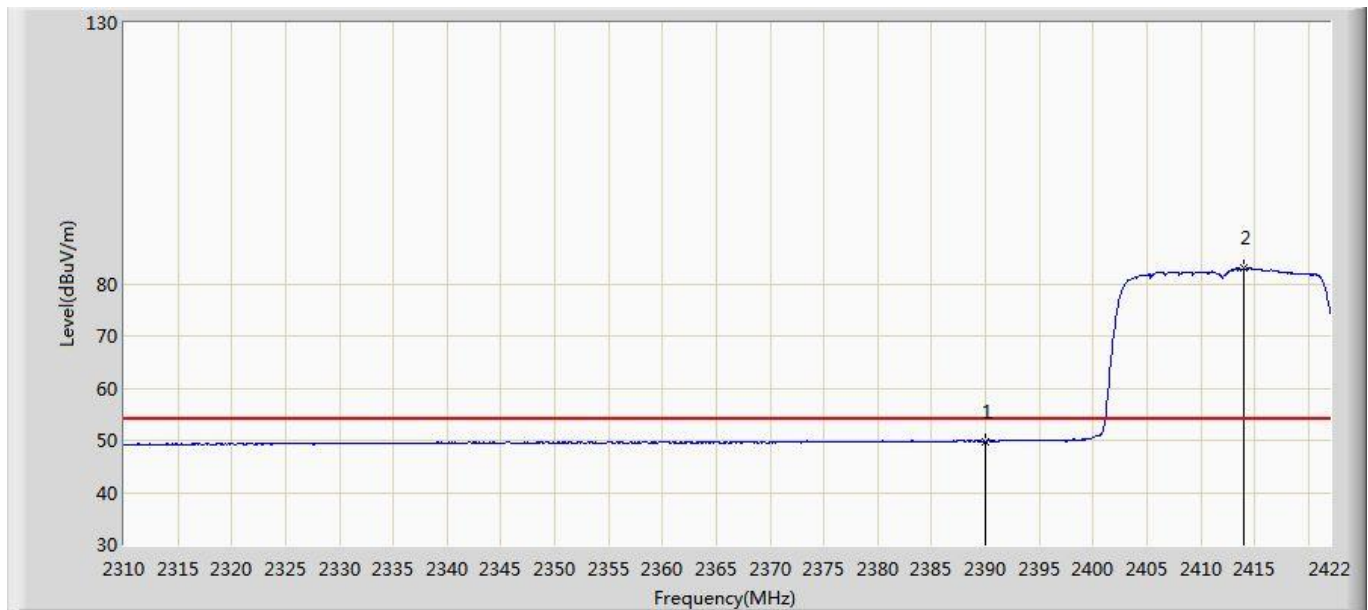


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.826	17.552	-4.174	54.000	32.274	AV
2		*	2413.992	82.979	50.595	N/A	N/A	32.383	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

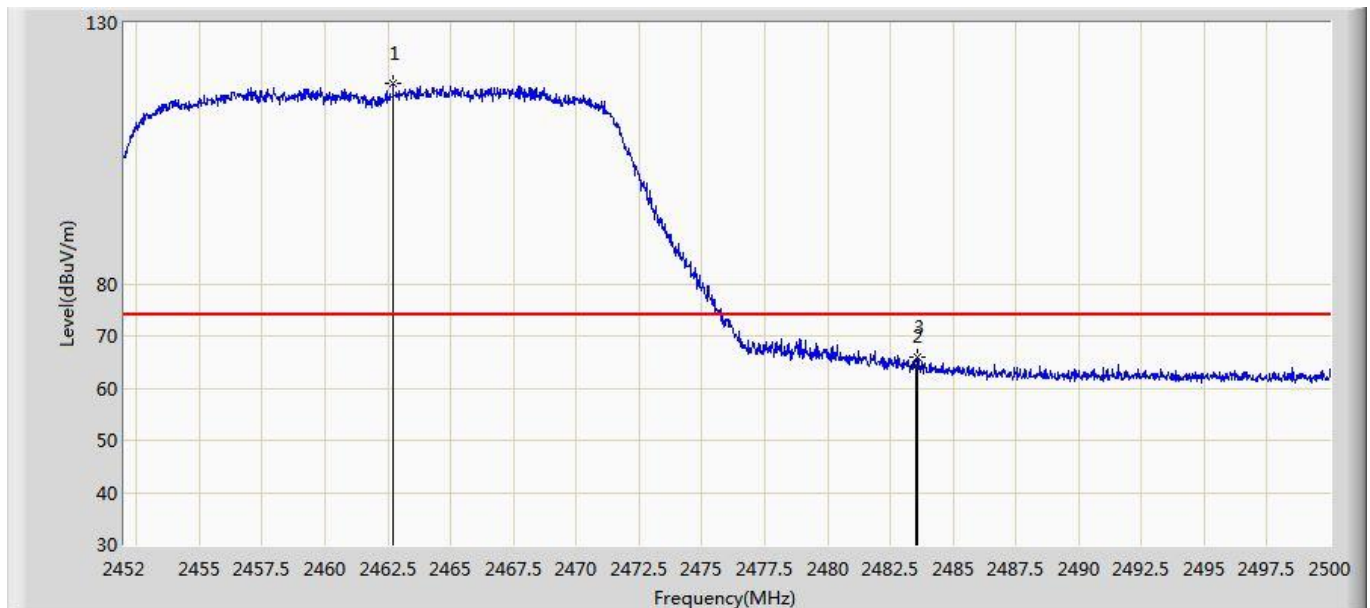


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.704	118.314	85.705	N/A	N/A	32.608	PK
2			2483.500	64.189	31.485	-9.811	74.000	32.704	PK
3			2483.608	65.985	33.280	-8.015	74.000	32.705	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

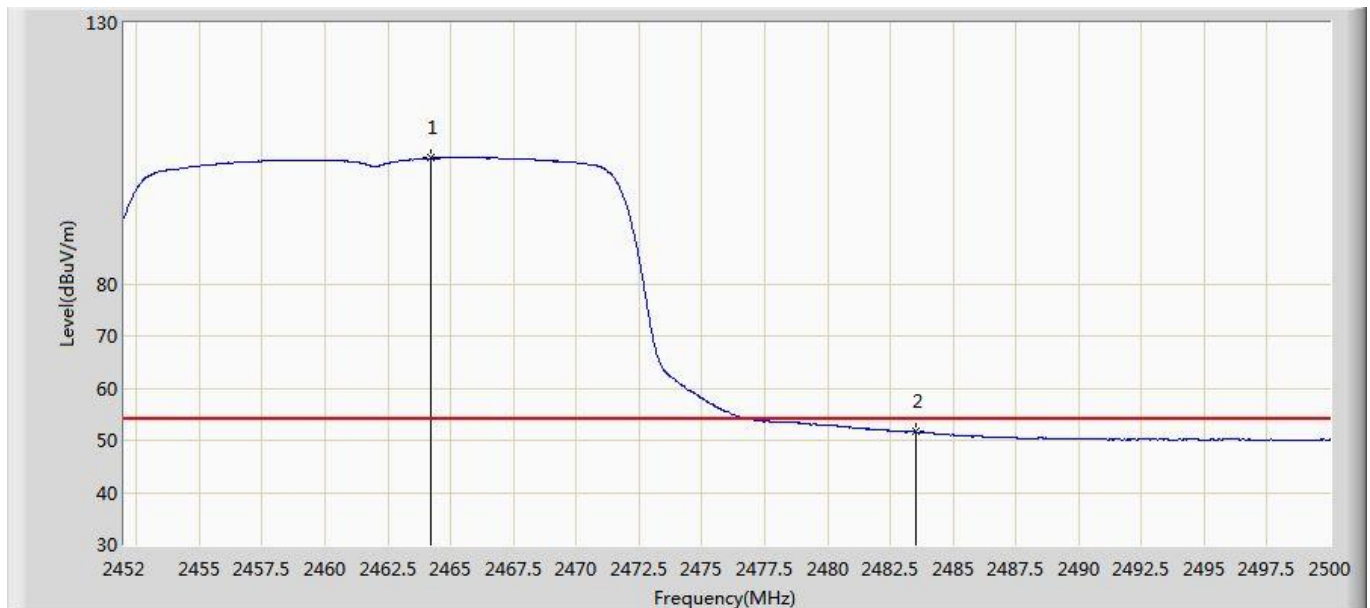


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.240	104.084	71.468	N/A	N/A	32.616	AV
2			2483.500	51.597	18.893	-2.403	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

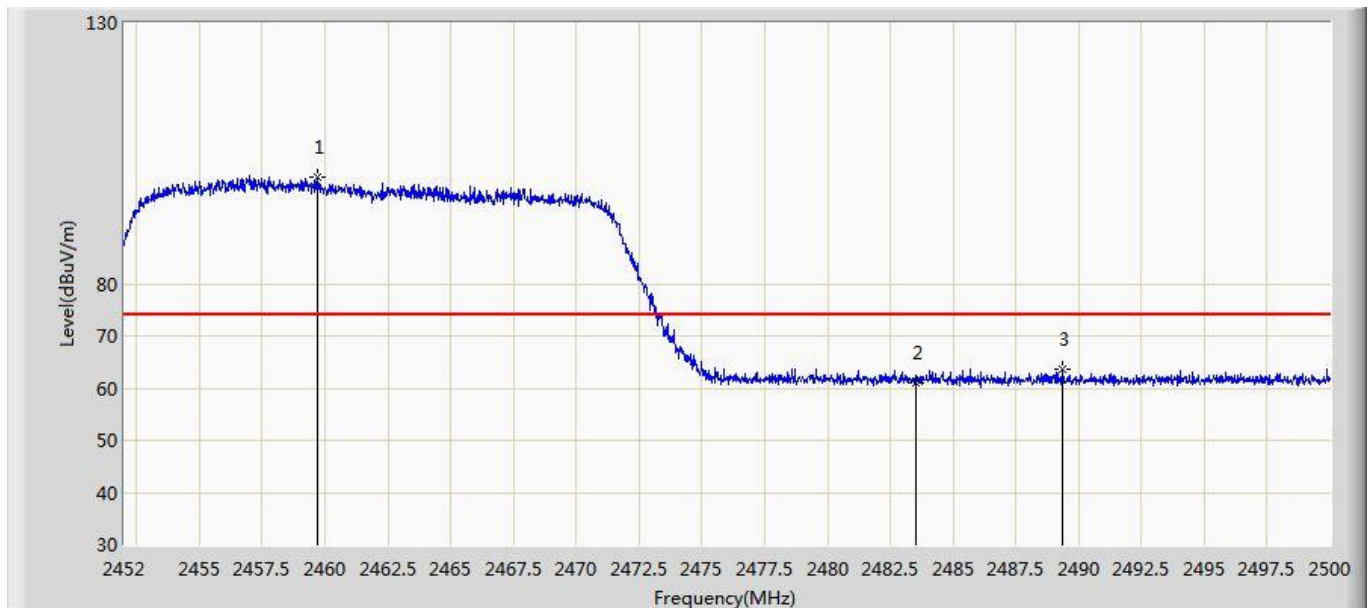


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.728	100.340	67.745	N/A	N/A	32.595	PK
2			2483.500	61.132	28.428	-12.868	74.000	32.704	PK
3			2489.344	63.526	30.795	-10.474	74.000	32.731	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462 MHz with OAW-AP1361D (CDD Mode)	

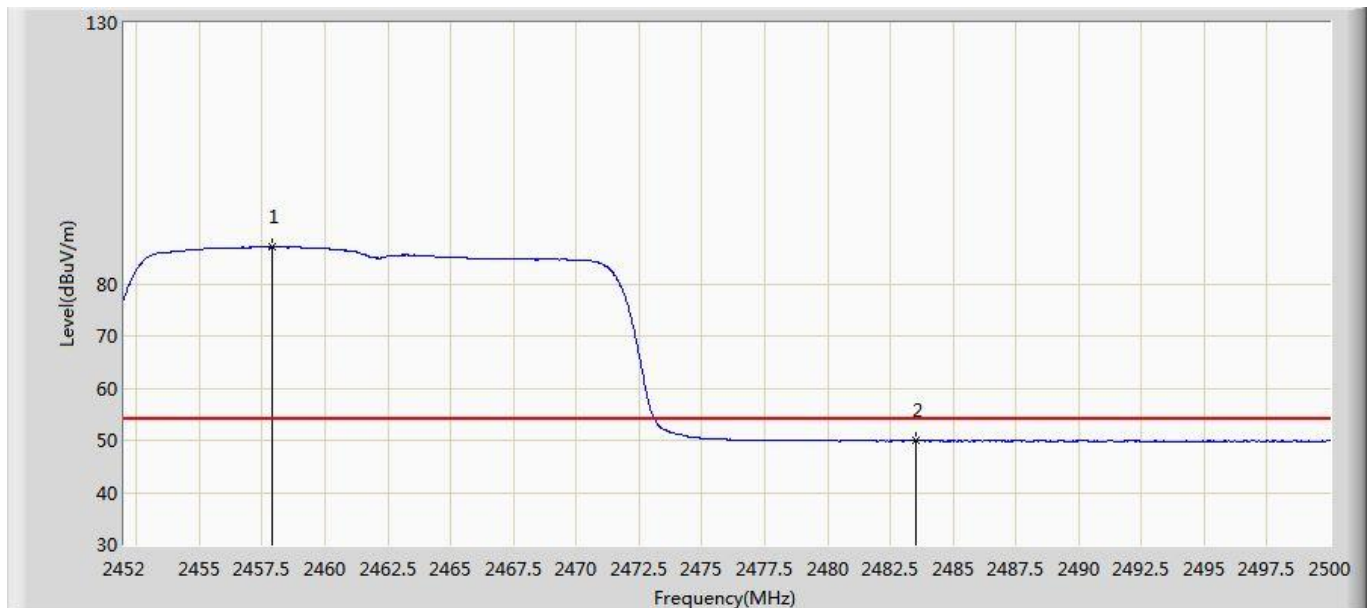


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.880	87.018	54.432	N/A	N/A	32.587	AV
2			2483.500	49.908	17.204	-4.092	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

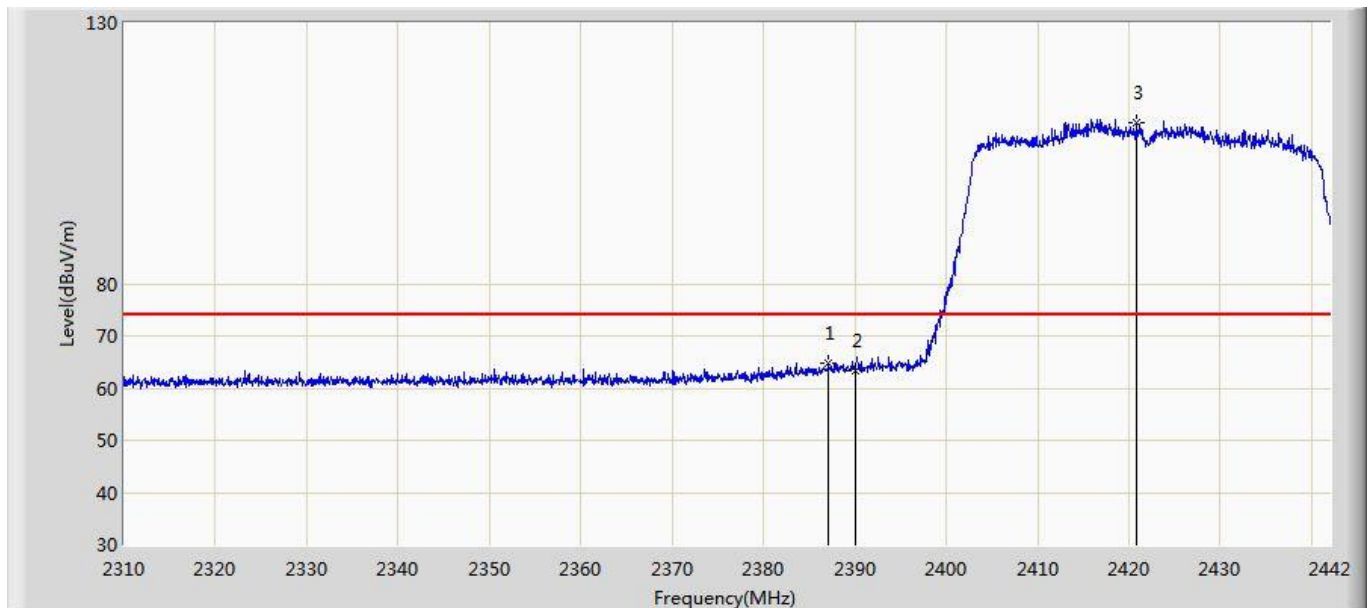


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.154	64.859	32.598	-9.141	74.000	32.262	PK
2			2390.000	63.382	31.108	-10.618	74.000	32.274	PK
3		*	2420.814	111.008	78.593	N/A	N/A	32.415	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

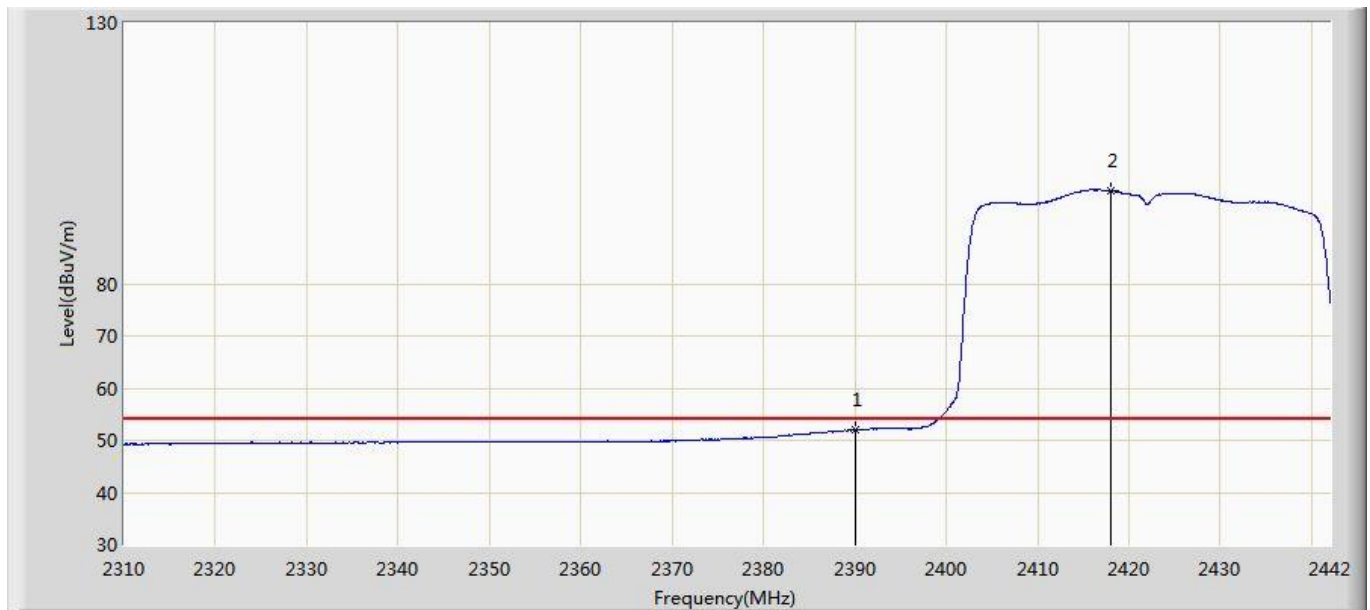


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.120	19.846	-1.880	54.000	32.274	AV
2		*	2417.976	97.883	65.481	N/A	N/A	32.402	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

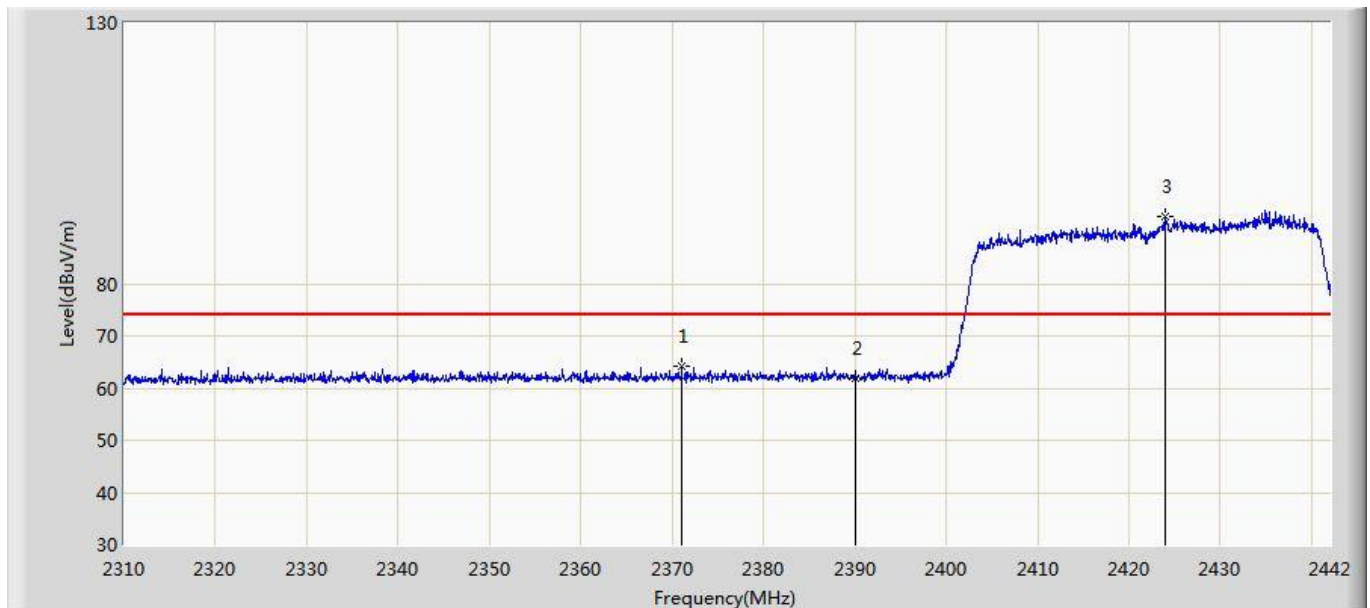


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2371.050	64.067	31.880	-9.933	74.000	32.187	PK
2			2390.000	62.011	29.737	-11.989	74.000	32.274	PK
3		*	2424.048	92.773	60.343	N/A	N/A	32.431	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422 MHz with OAW-AP1361D (CDD Mode)	

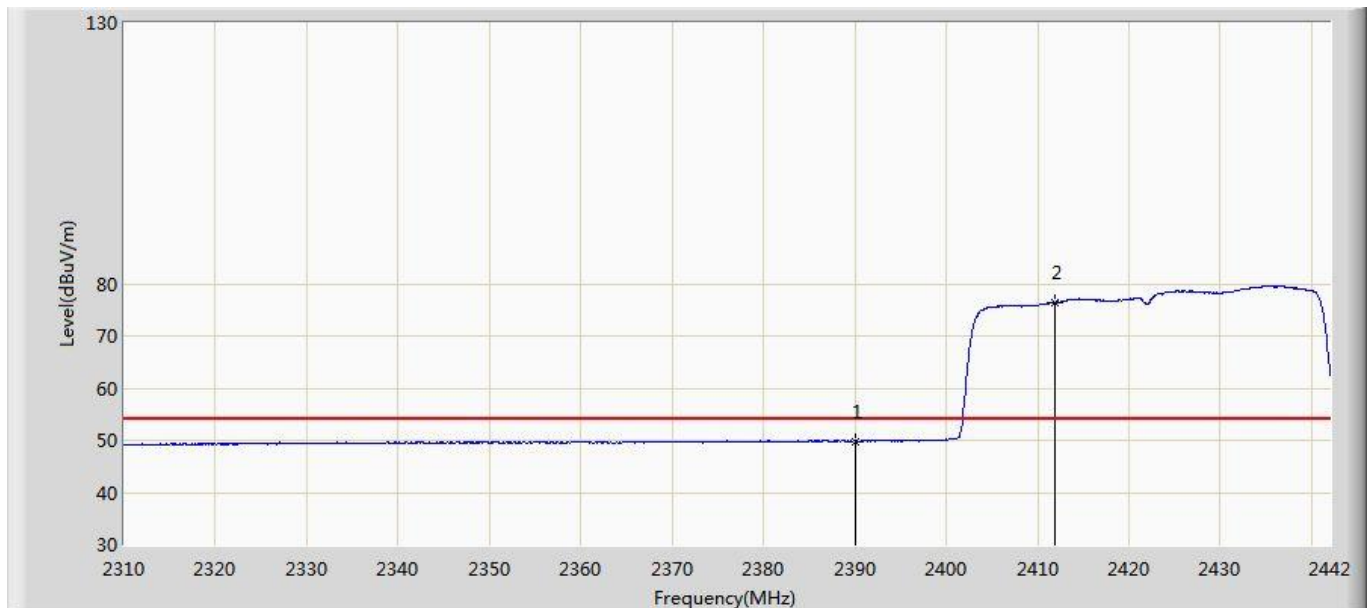


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.826	17.552	-4.174	54.000	32.274	AV
2		*	2411.970	76.433	44.059	N/A	N/A	32.374	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

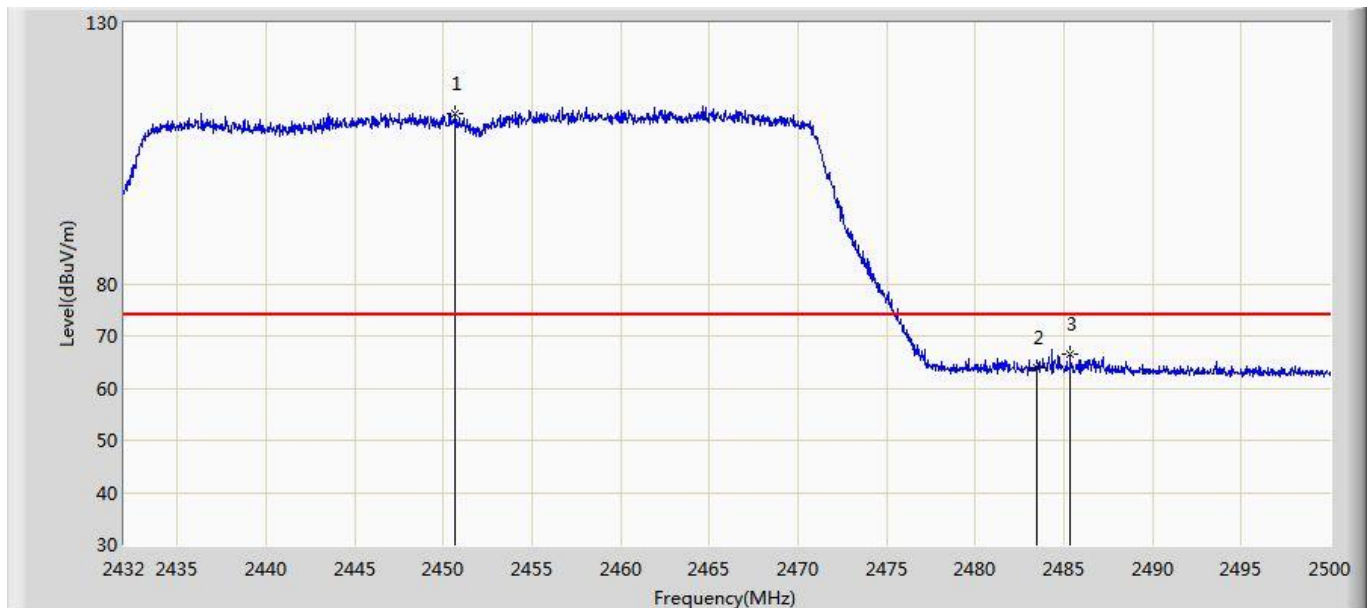


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.700	112.494	79.940	N/A	N/A	32.553	PK
2			2483.500	63.784	31.080	-10.216	74.000	32.704	PK
3			2485.346	66.637	33.924	-7.363	74.000	32.713	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

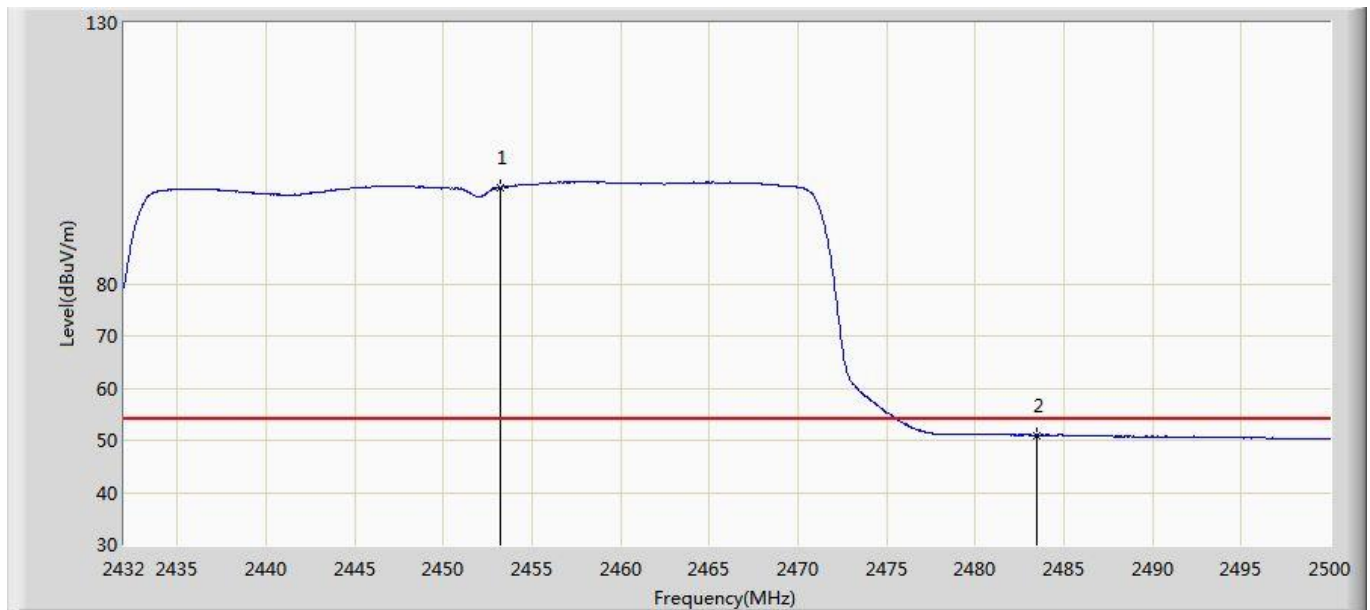


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.250	98.487	65.922	N/A	N/A	32.565	AV
2			2483.500	51.003	18.299	-2.997	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

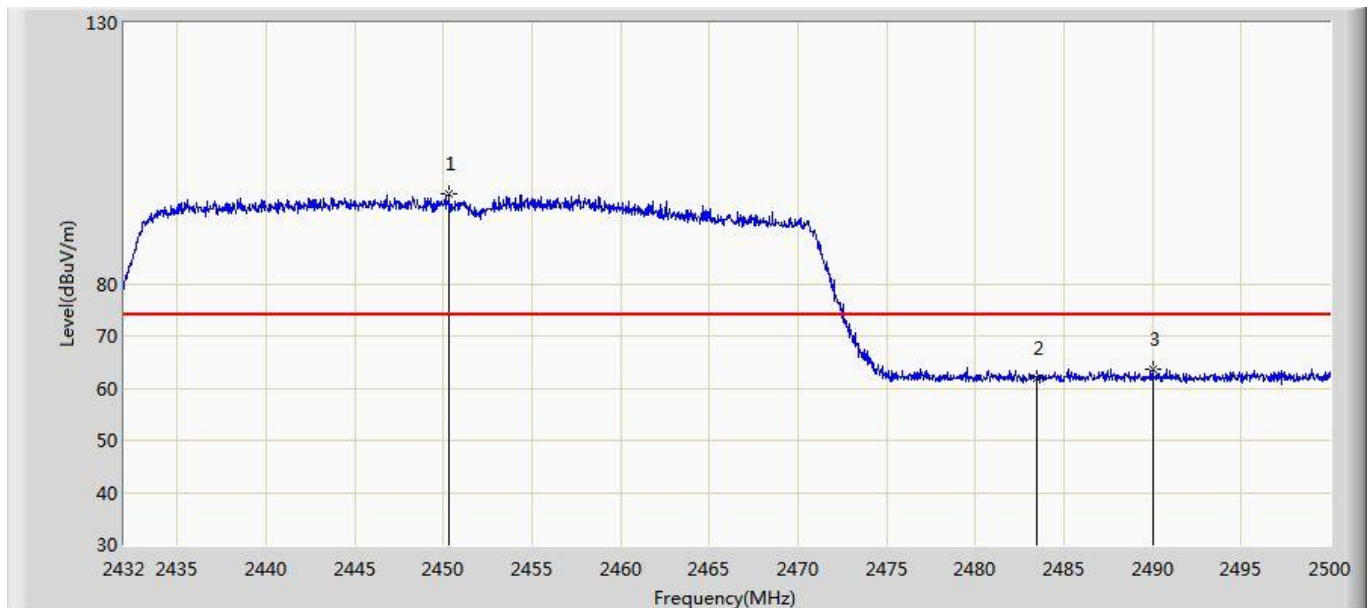


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.360	97.104	64.552	N/A	N/A	32.552	PK
2			2483.500	61.818	29.114	-12.182	74.000	32.704	PK
3			2490.038	63.749	31.015	-10.251	74.000	32.734	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/25 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452 MHz with OAW-AP1361D (CDD Mode)	

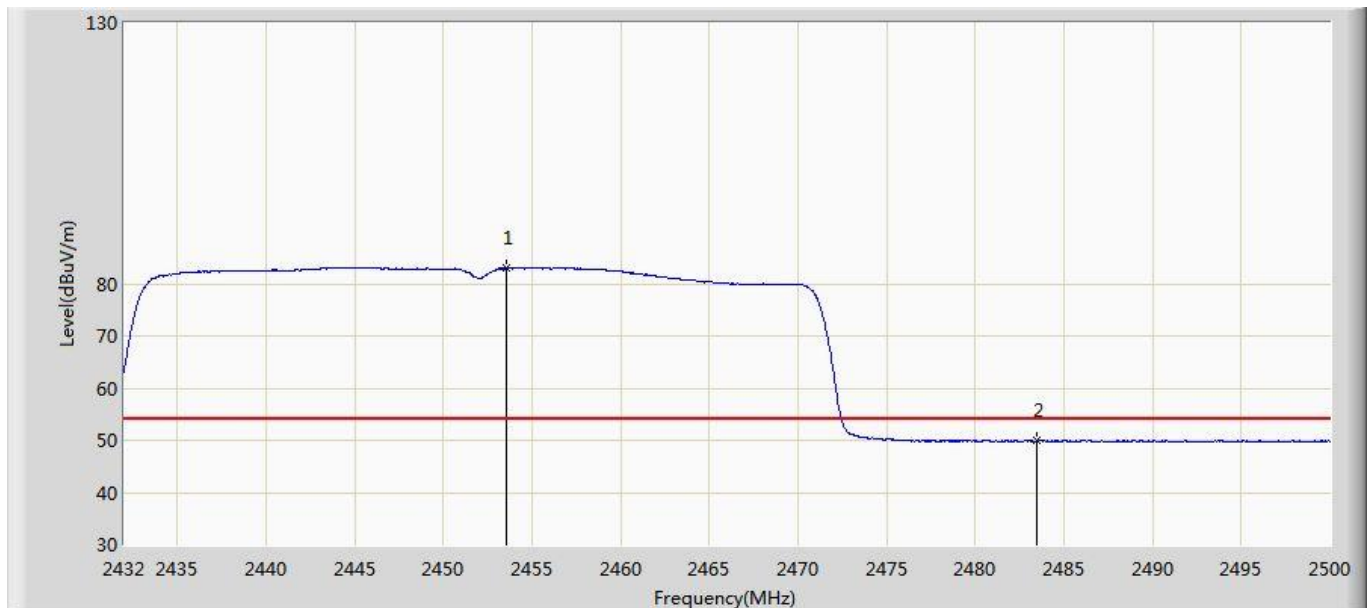


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.522	82.980	50.413	N/A	N/A	32.566	AV
2			2483.500	49.859	17.155	-4.141	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 15:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

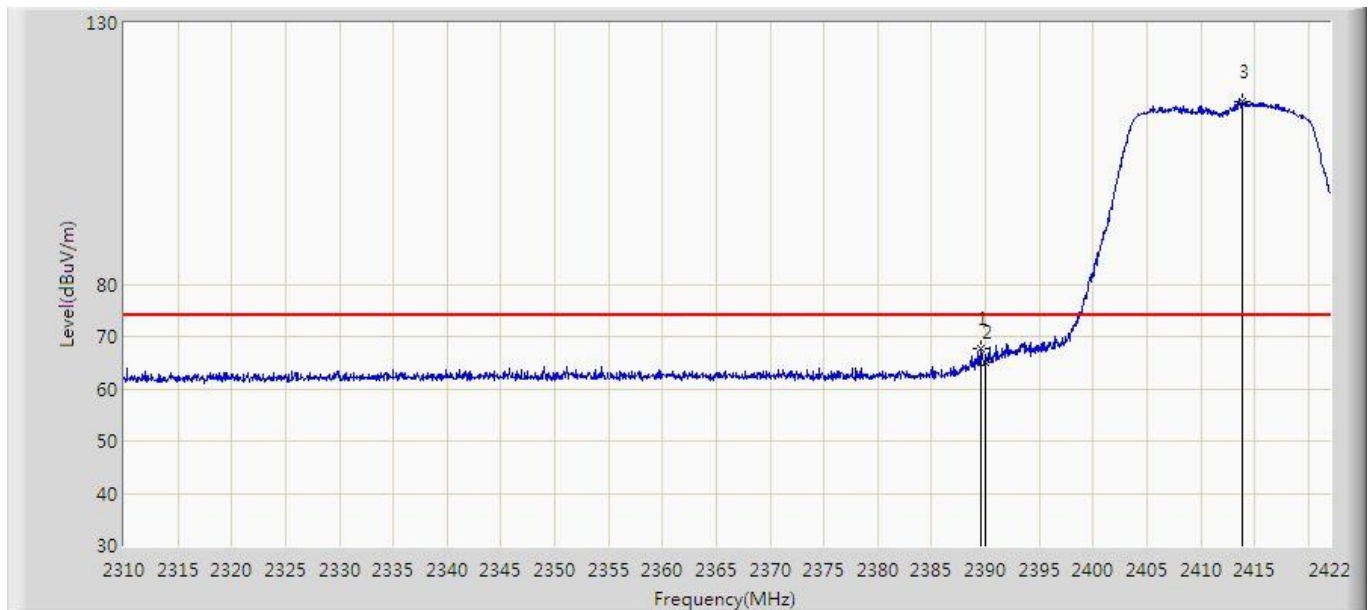


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.520	67.655	35.383	-6.345	74.000	32.273	PK
2			2390.000	65.174	32.900	-8.826	74.000	32.274	PK
3		*	2413.824	115.051	82.668	N/A	N/A	32.383	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 17:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

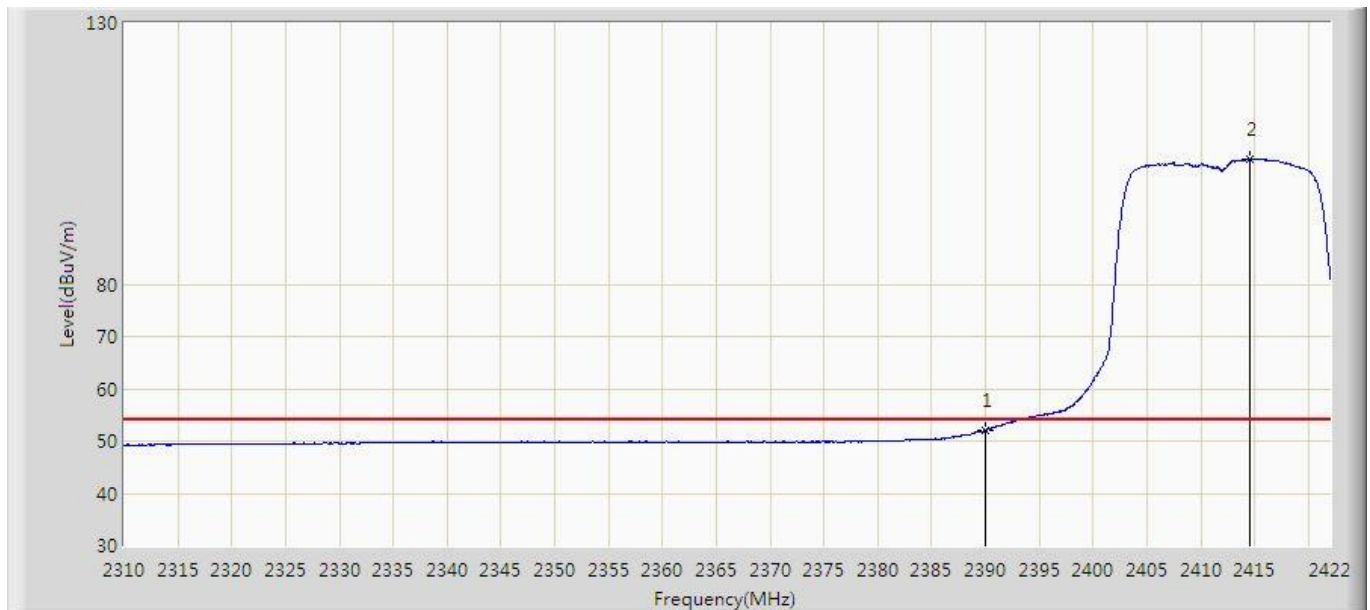


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.087	19.813	-1.913	54.000	32.274	AV
2		*	2414.608	103.947	71.561	N/A	N/A	32.386	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 17:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

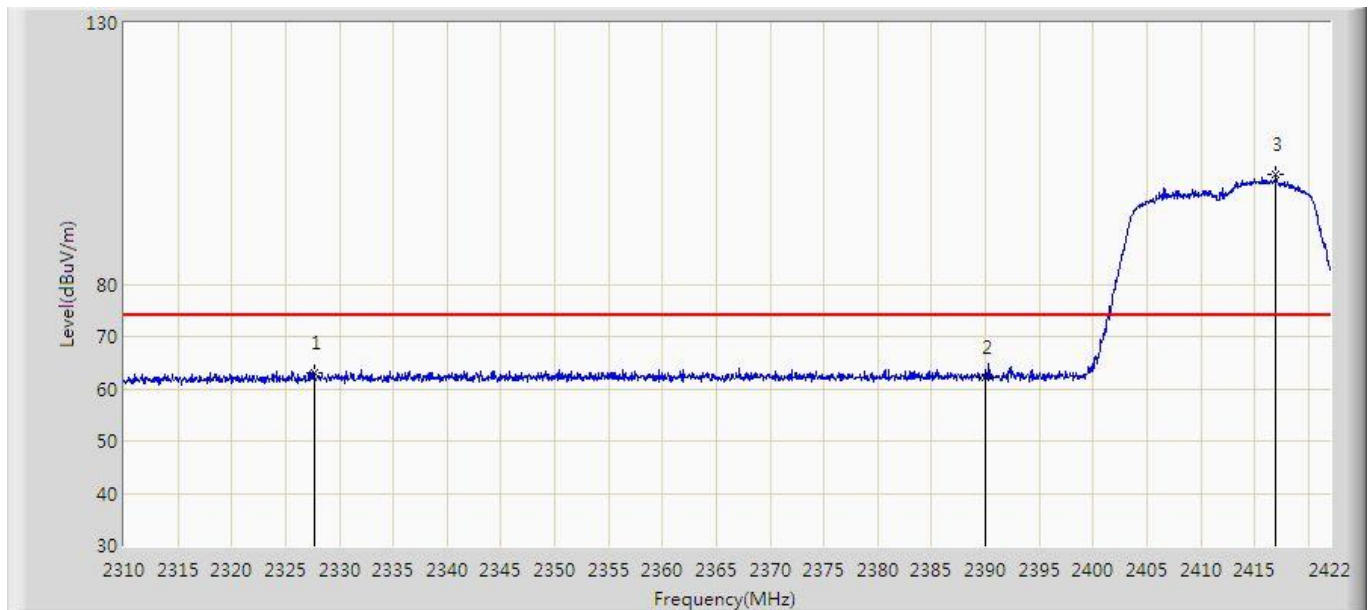


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2327.696	63.169	31.182	-10.831	74.000	31.987	PK
2			2390.000	62.280	30.006	-11.720	74.000	32.274	PK
3		*	2417.016	100.927	68.529	N/A	N/A	32.398	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 17:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

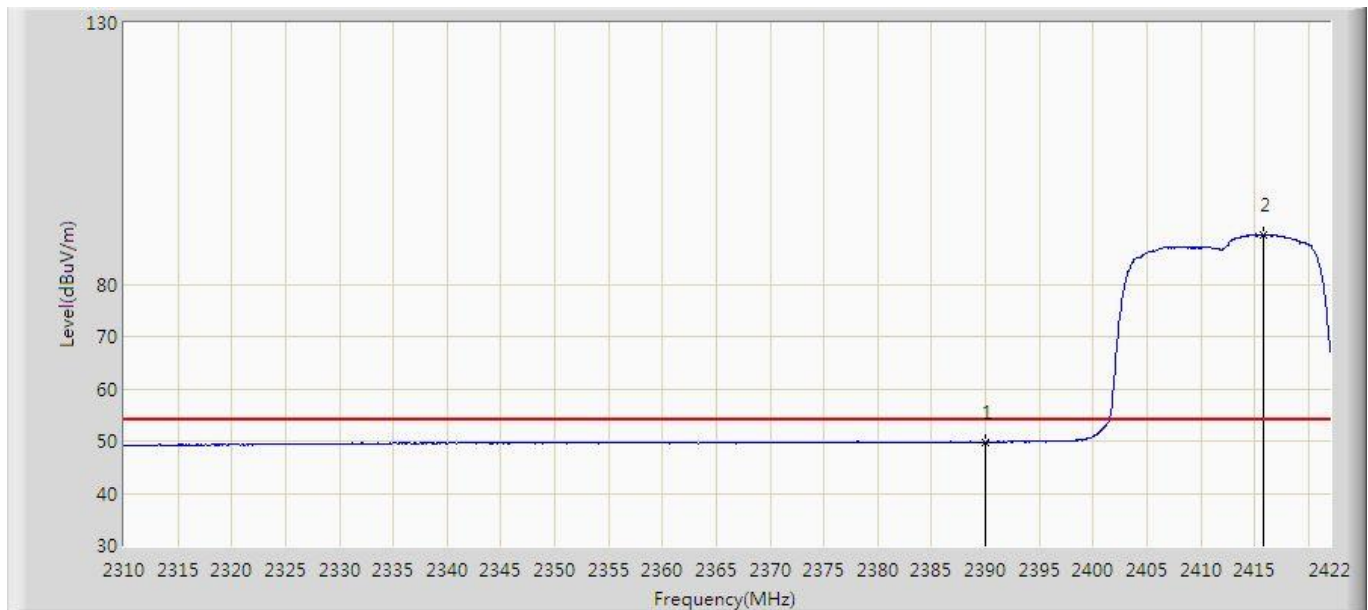


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.756	17.482	-4.244	54.000	32.274	AV
2		*	2415.840	89.560	57.168	N/A	N/A	32.393	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 18:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

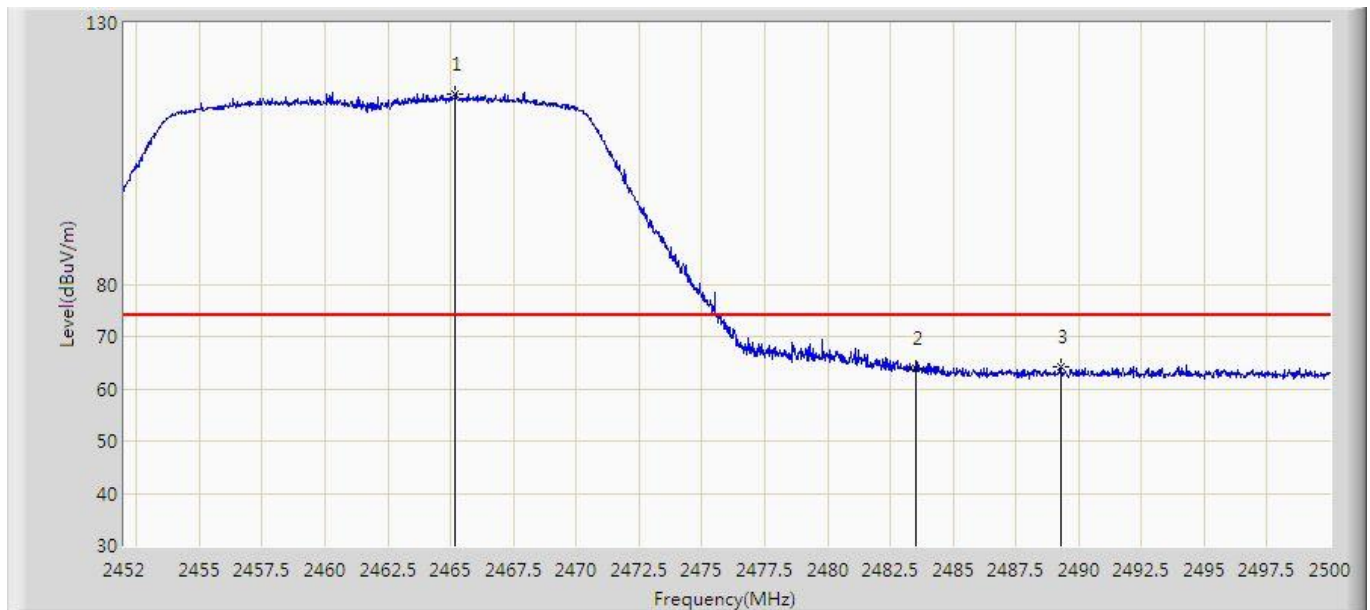


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.176	116.440	83.820	N/A	N/A	32.620	PK
2			2483.500	63.844	31.140	-10.156	74.000	32.704	PK
3			2489.272	64.334	31.603	-9.666	74.000	32.730	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 18:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

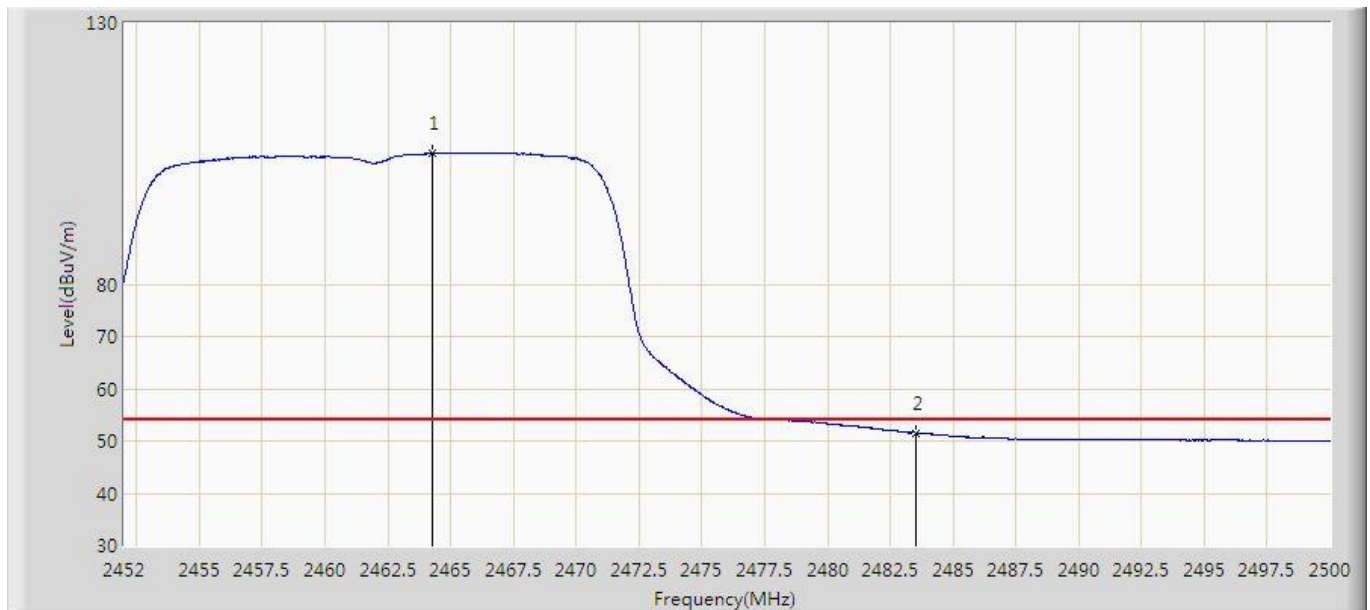


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.288	105.009	72.393	N/A	N/A	32.616	AV
2			2483.500	51.591	18.887	-2.409	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 18:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

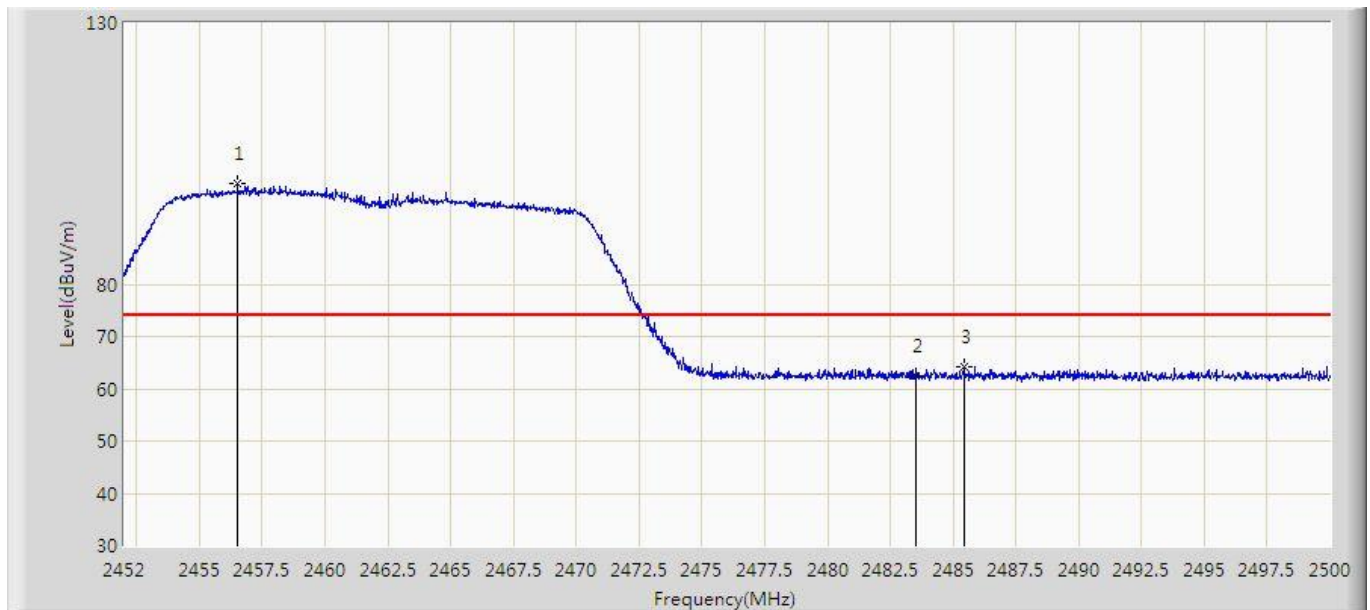


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.512	99.390	66.810	N/A	N/A	32.580	PK
2			2483.500	62.587	29.883	-11.413	74.000	32.704	PK
3			2485.432	64.100	31.387	-9.900	74.000	32.714	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 19:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

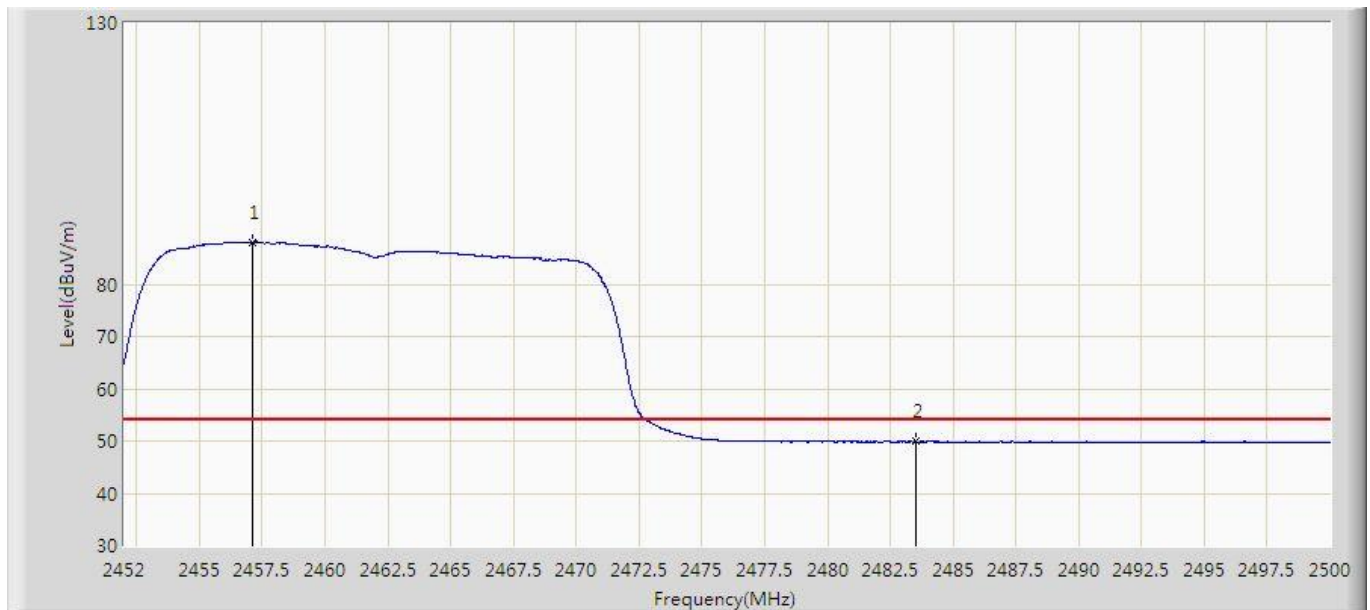


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.136	88.075	55.492	N/A	N/A	32.583	AV
2			2483.500	49.867	17.163	-4.133	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 19:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

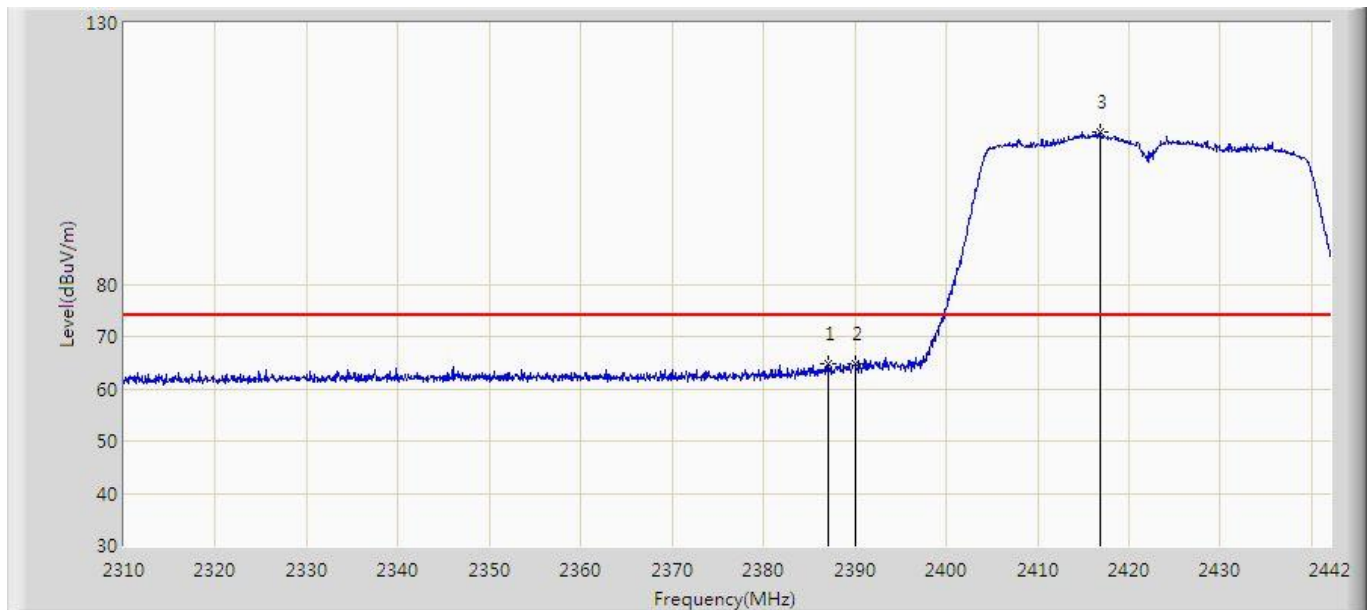


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.154	64.691	32.430	-9.309	74.000	32.262	PK
2			2390.000	64.678	32.404	-9.322	74.000	32.274	PK
3		*	2416.854	109.065	76.668	N/A	N/A	32.397	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 19:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

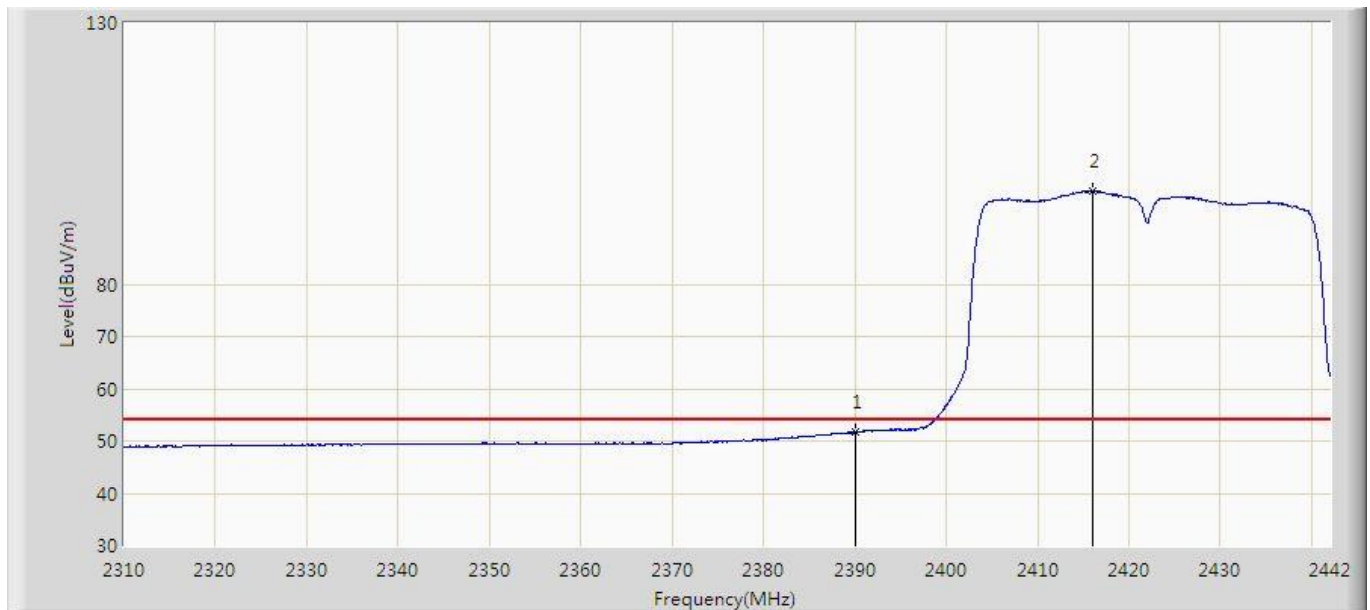


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.722	19.448	-2.278	54.000	32.274	AV
2		*	2416.062	97.698	65.305	N/A	N/A	32.393	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 19:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

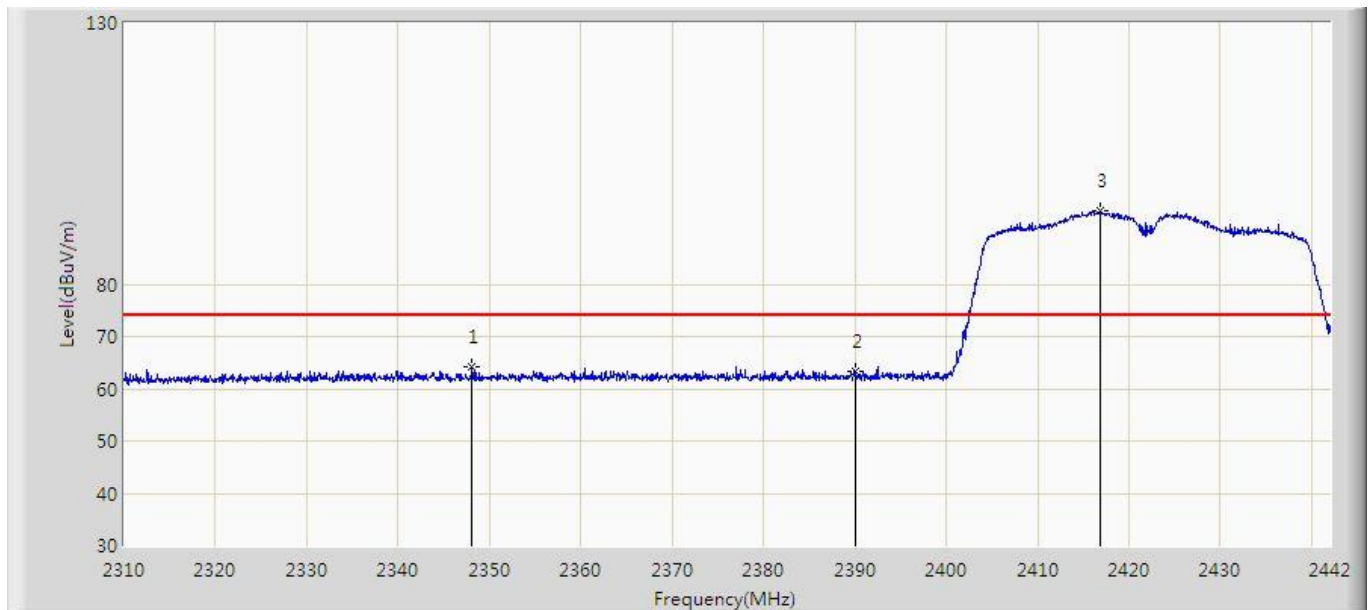


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2348.082	64.068	31.987	-9.932	74.000	32.081	PK
2			2390.000	63.235	30.961	-10.765	74.000	32.274	PK
3		*	2416.788	93.984	61.587	N/A	N/A	32.397	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 19:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

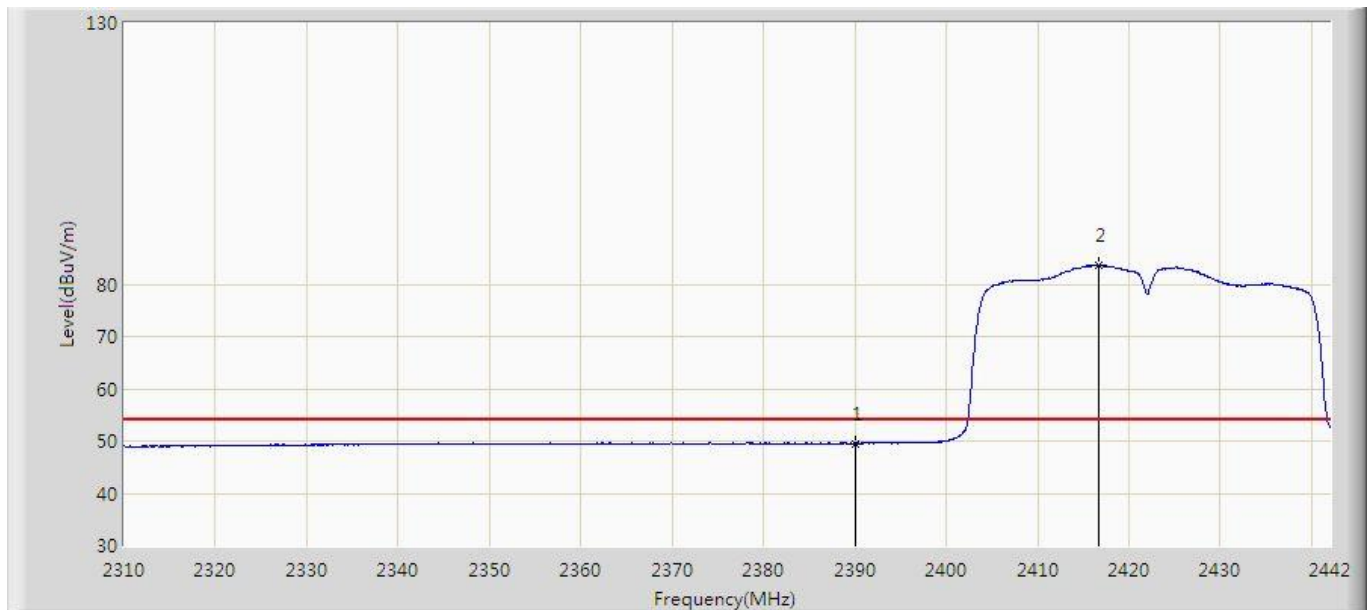


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.562	17.288	-4.438	54.000	32.274	AV
2		*	2416.656	83.623	51.227	N/A	N/A	32.396	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 19:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

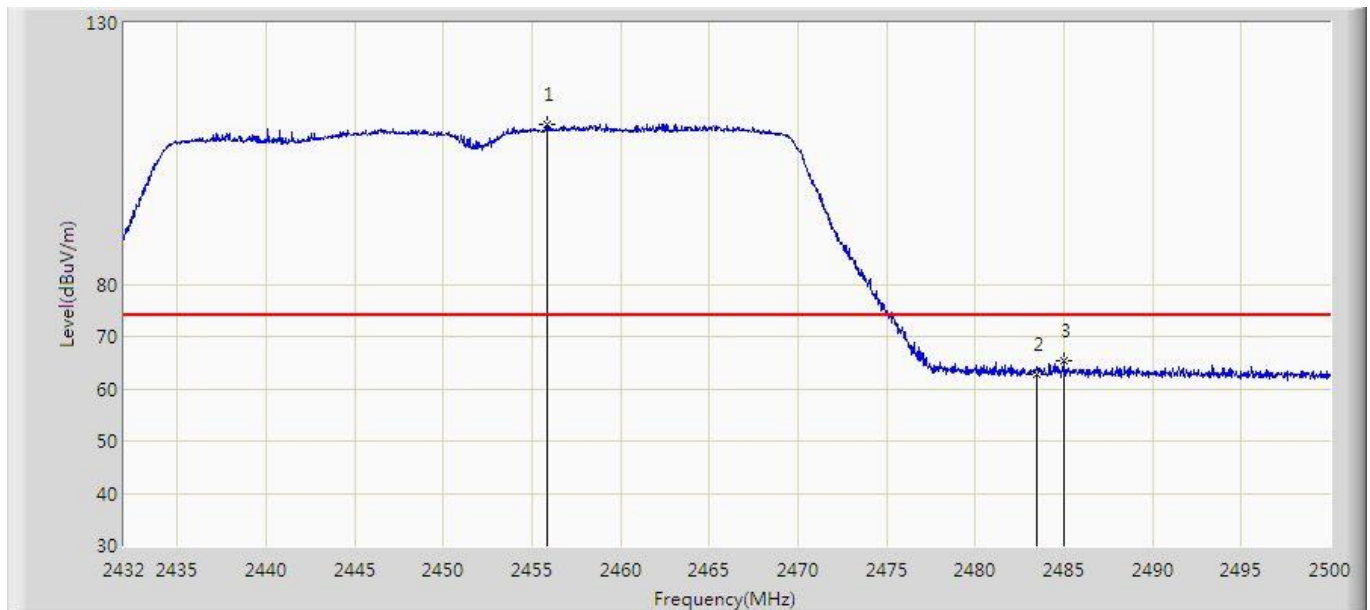


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.868	110.722	78.145	N/A	N/A	32.577	PK
2			2483.500	62.772	30.068	-11.228	74.000	32.704	PK
3			2485.040	65.461	32.750	-8.539	74.000	32.711	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 19:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

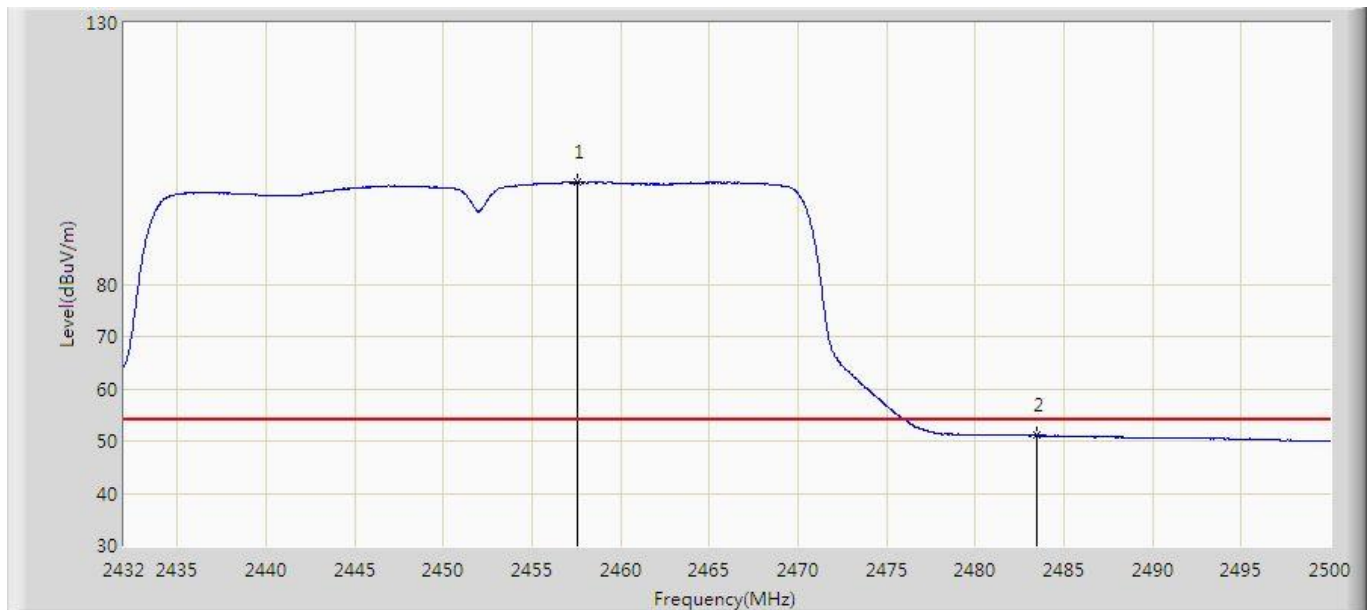


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.568	99.564	66.979	N/A	N/A	32.585	AV
2			2483.500	51.018	18.314	-2.982	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 19:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

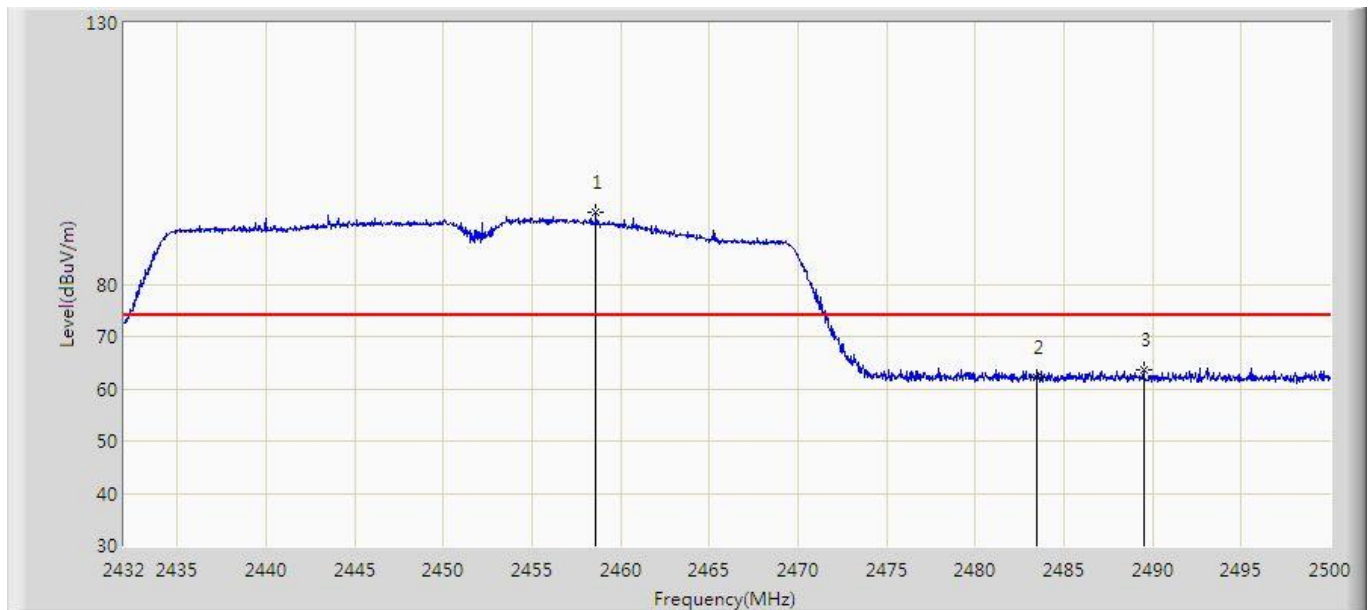


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.622	93.827	61.237	N/A	N/A	32.589	PK
2			2483.500	62.173	29.469	-11.827	74.000	32.704	PK
3			2489.494	63.518	30.786	-10.482	74.000	32.731	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 19:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

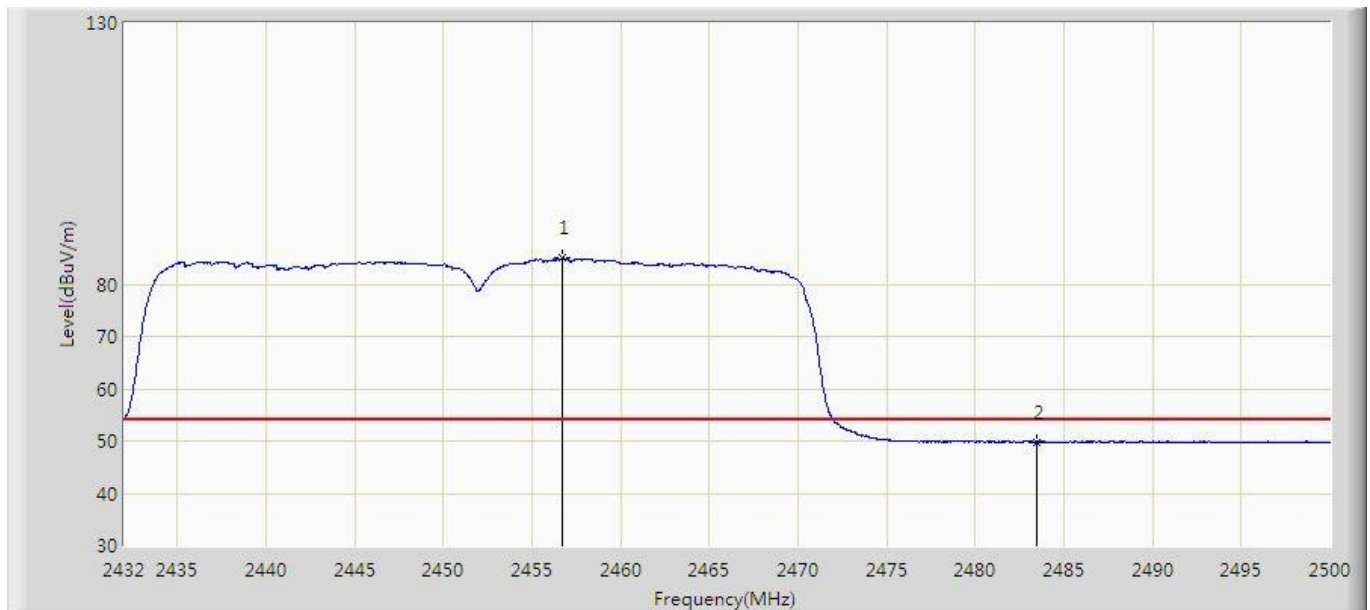


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.718	85.009	52.428	N/A	N/A	32.581	AV
2			2483.500	49.825	17.121	-4.175	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

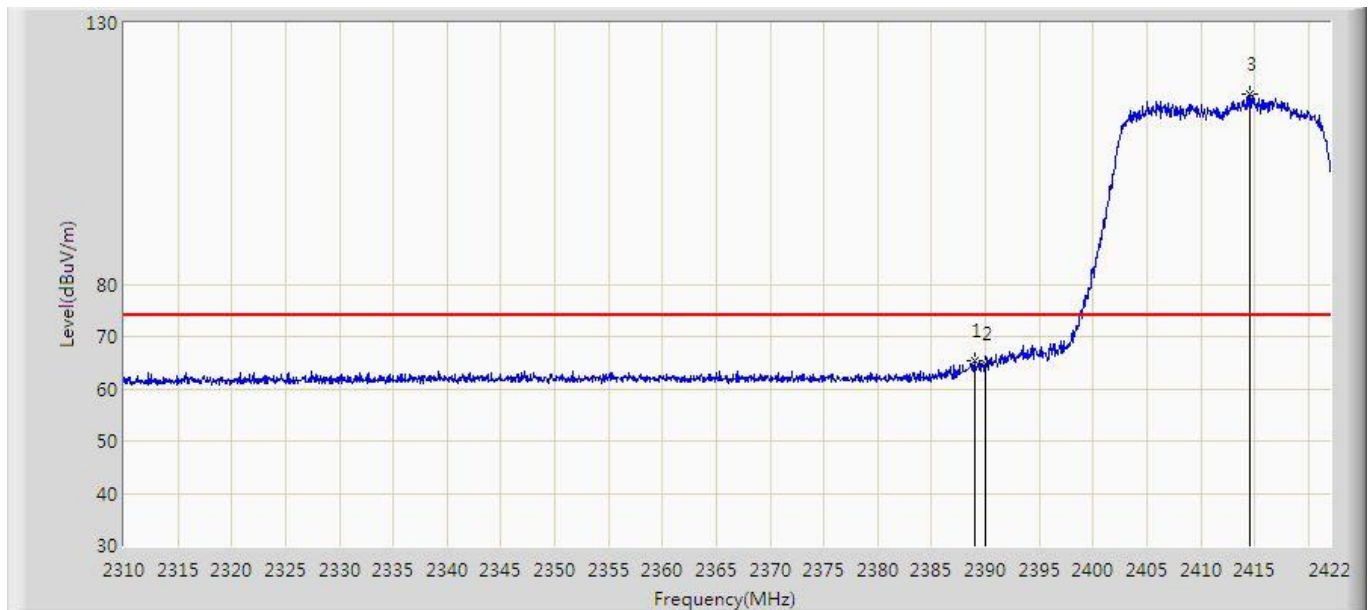


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.016	65.353	33.083	-8.647	74.000	32.270	PK
2			2390.000	64.818	32.544	-9.182	74.000	32.274	PK
3		*	2414.552	116.485	84.099	N/A	N/A	32.386	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

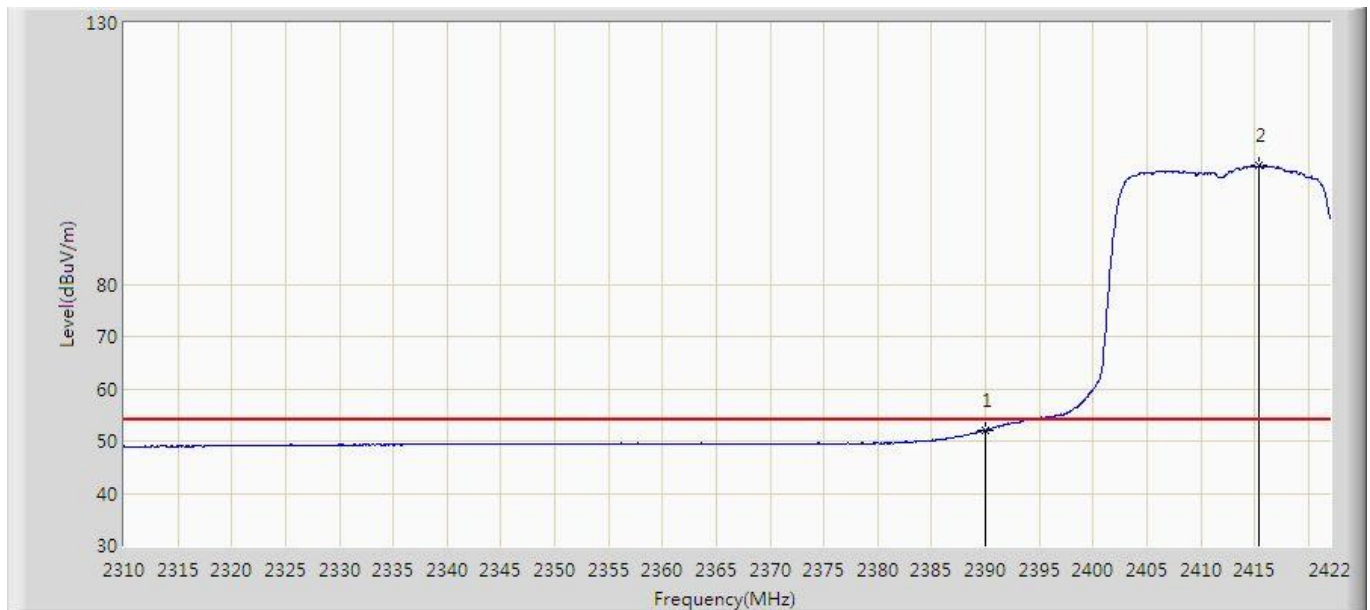


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.164	19.890	-1.836	54.000	32.274	AV
2		*	2415.336	102.665	70.275	N/A	N/A	32.390	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

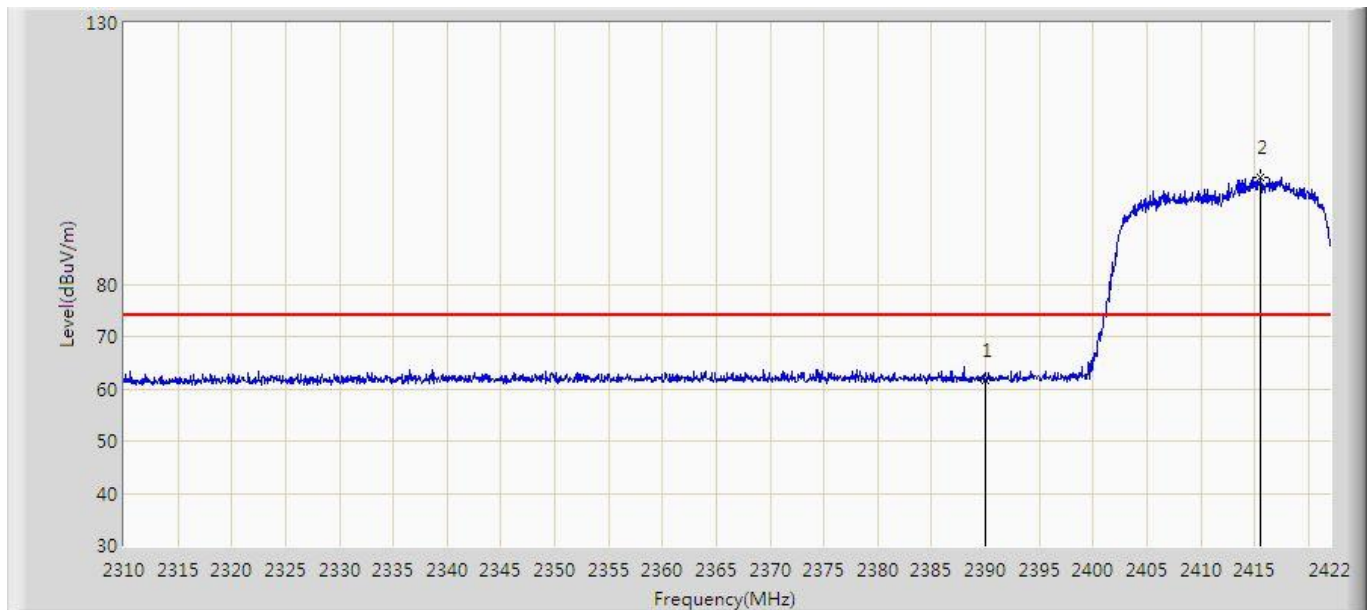


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	61.595	29.321	-12.405	74.000	32.274	PK
2		*	2415.560	100.462	68.071	N/A	N/A	32.391	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz with OAW-AP1361D (Beam-Forming Mode)	

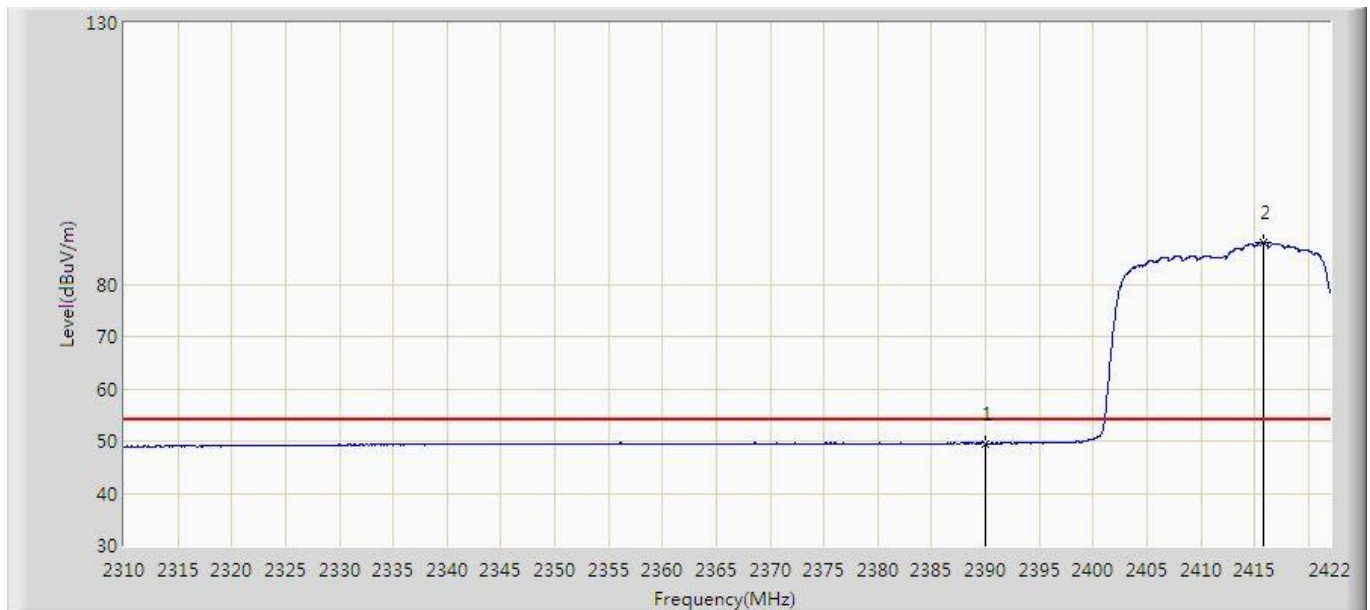


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.529	17.255	-4.471	54.000	32.274	AV
2		*	2415.840	88.011	55.619	N/A	N/A	32.393	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

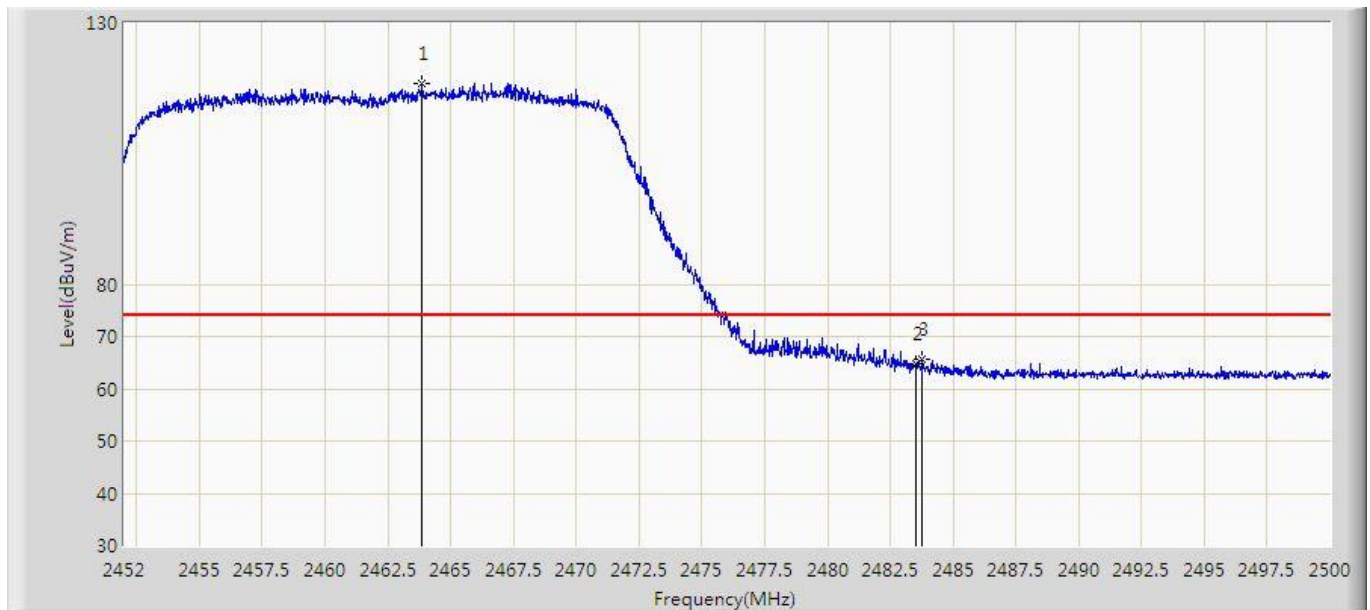


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.856	118.513	85.899	N/A	N/A	32.613	PK
2			2483.500	64.670	31.966	-9.330	74.000	32.704	PK
3			2483.776	65.616	32.910	-8.384	74.000	32.706	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

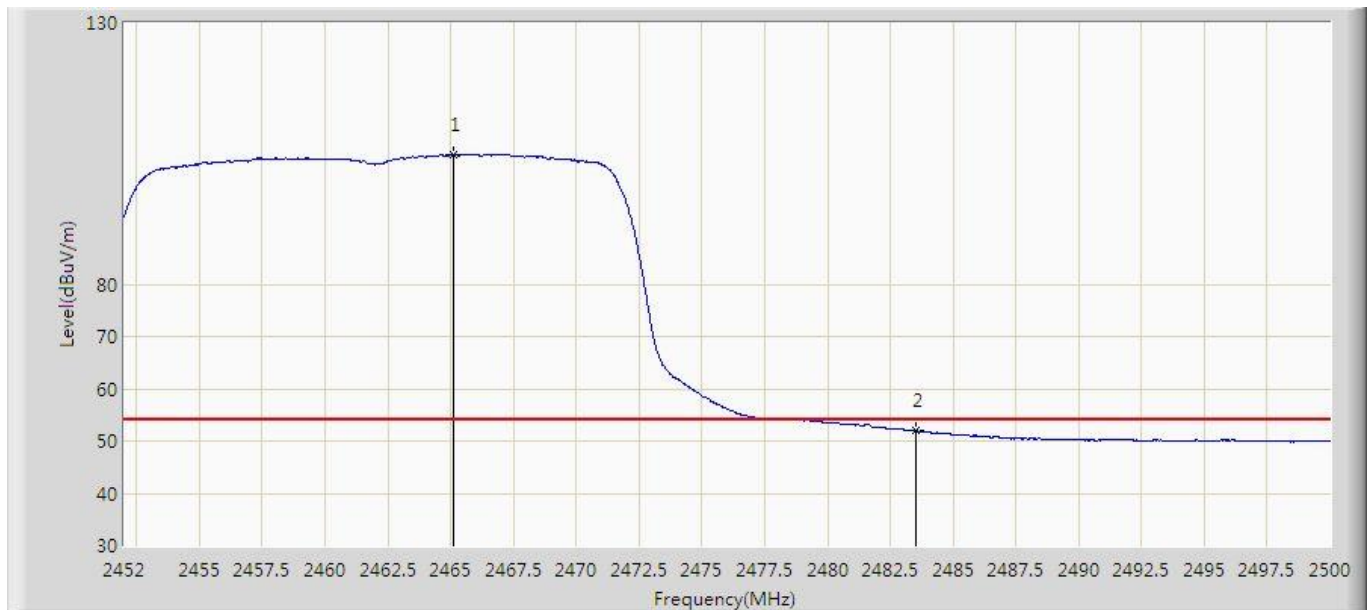


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.104	104.748	72.128	N/A	N/A	32.620	AV
2			2483.500	52.152	19.448	-1.848	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

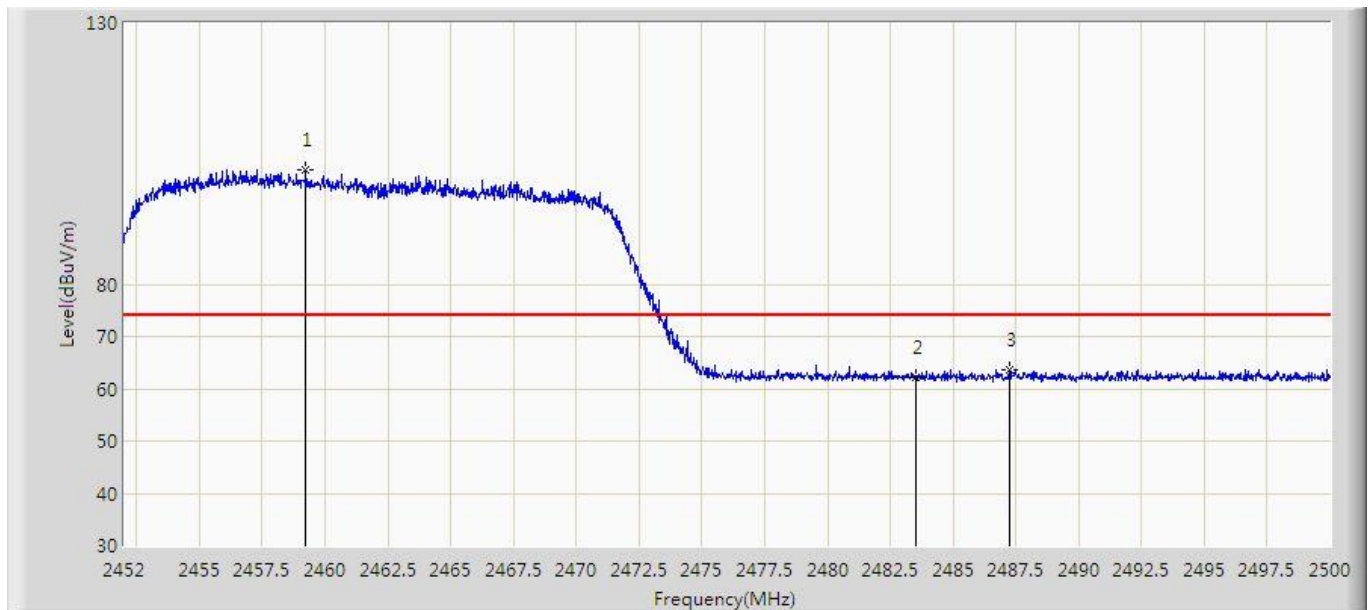


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.248	101.924	69.331	N/A	N/A	32.593	PK
2			2483.500	62.192	29.488	-11.808	74.000	32.704	PK
3			2487.256	63.721	31.000	-10.279	74.000	32.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz with OAW-AP1361D (Beam-Forming Mode)	

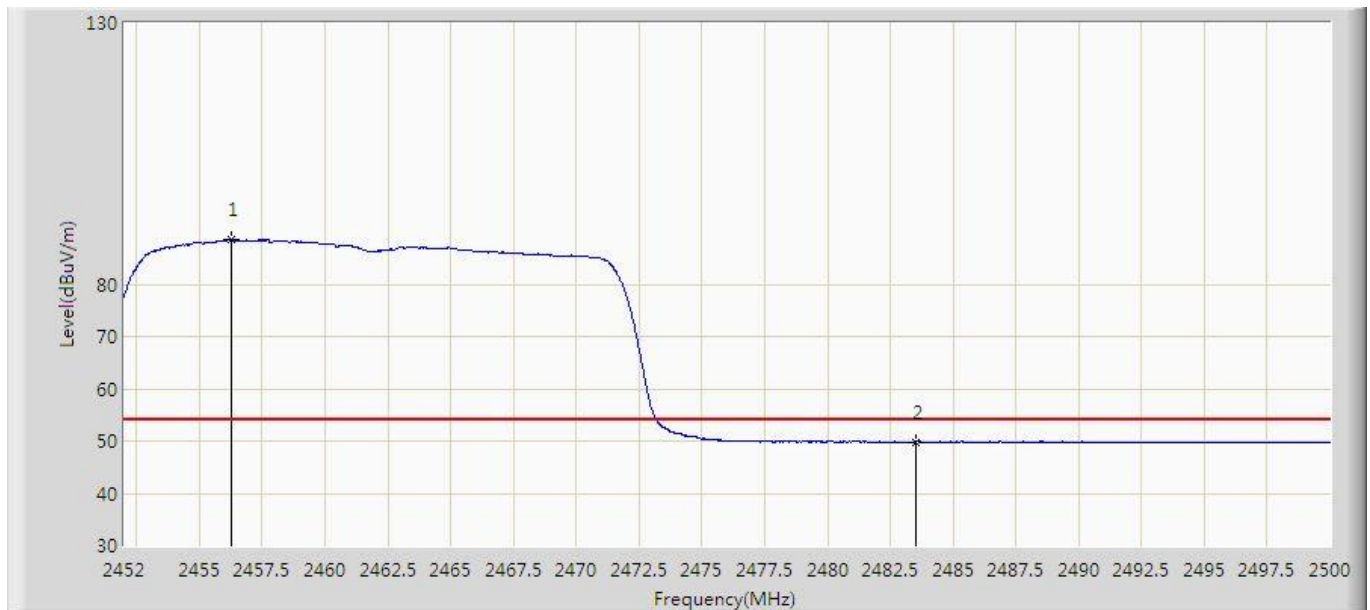


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.296	88.443	55.864	N/A	N/A	32.580	AV
2			2483.500	49.807	17.103	-4.193	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

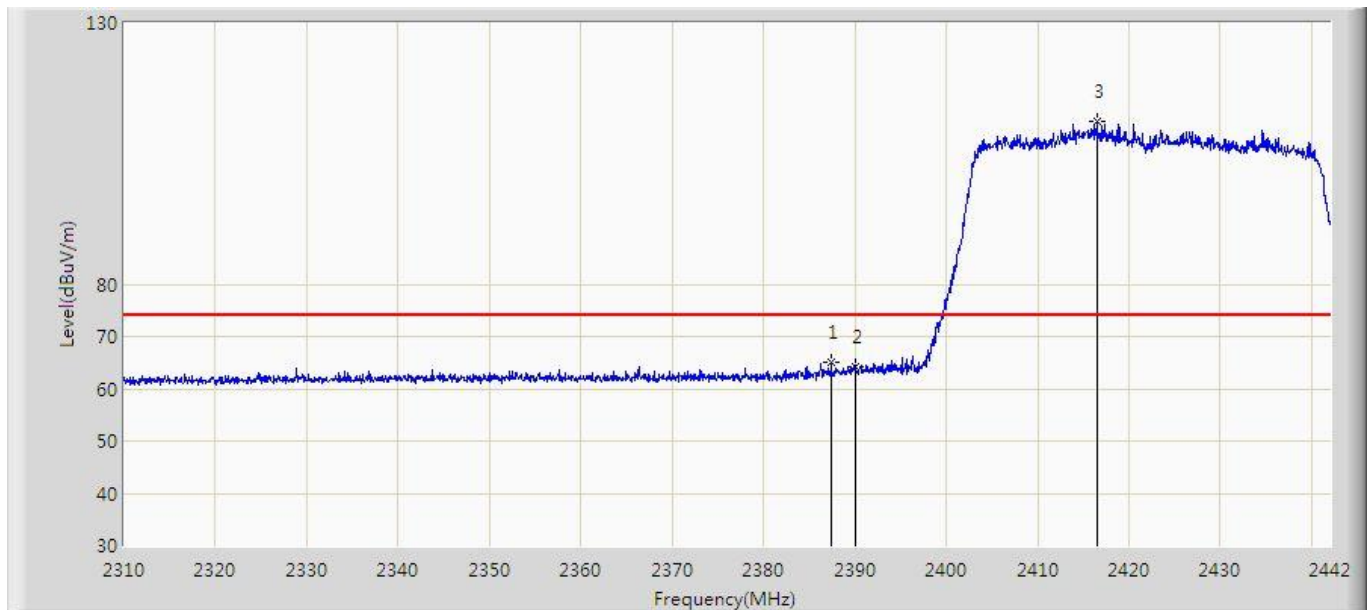


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.418	65.093	32.831	-8.907	74.000	32.263	PK
2			2390.000	64.302	32.028	-9.698	74.000	32.274	PK
3		*	2416.458	111.131	78.736	N/A	N/A	32.395	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

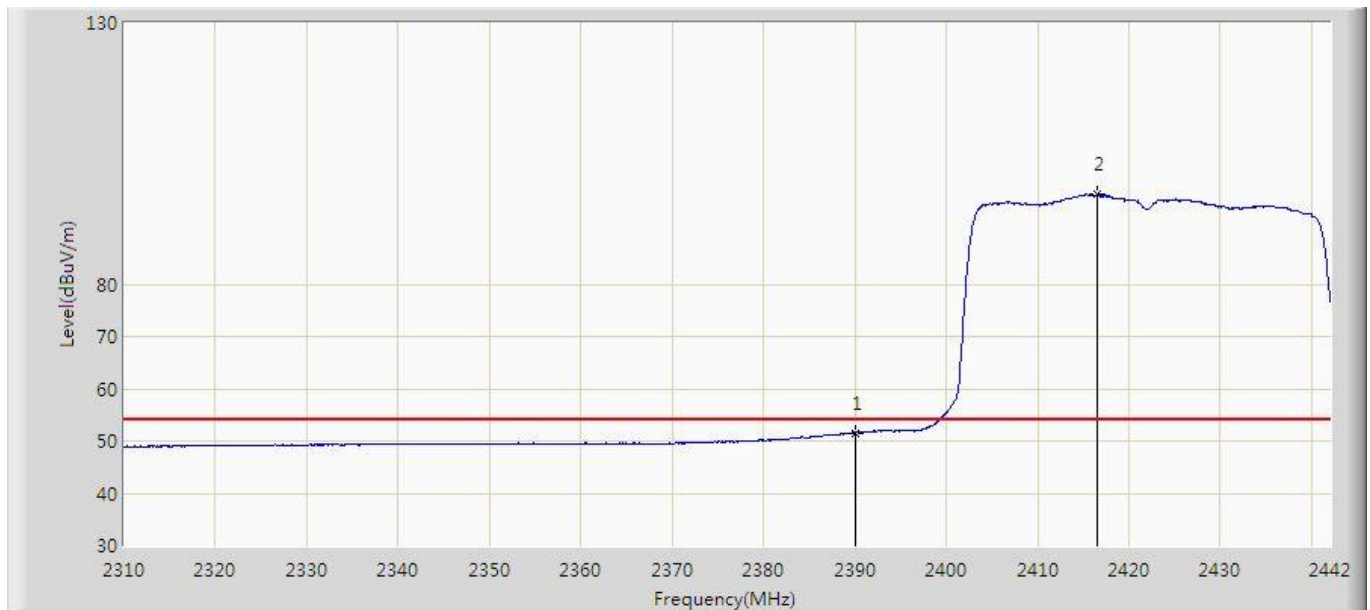

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.548	19.274	-2.452	54.000	32.274	AV
2		*	2416.590	97.240	64.844	N/A	N/A	32.396	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).