



802.11a Power Spectral Density - Ant 1 / Ant 0 + 1 (CDD Mode)


Channel 52 (5260MHz)

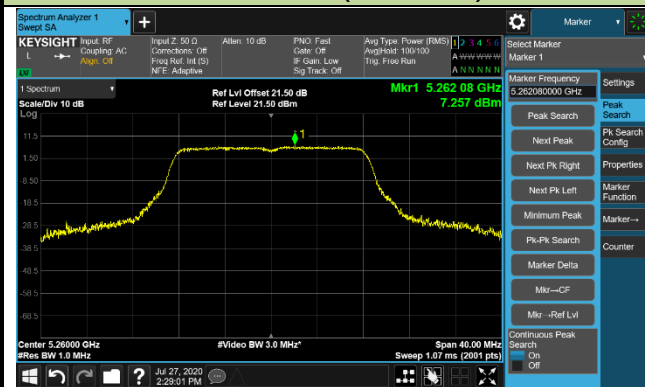


Channel 60 (5300MHz)

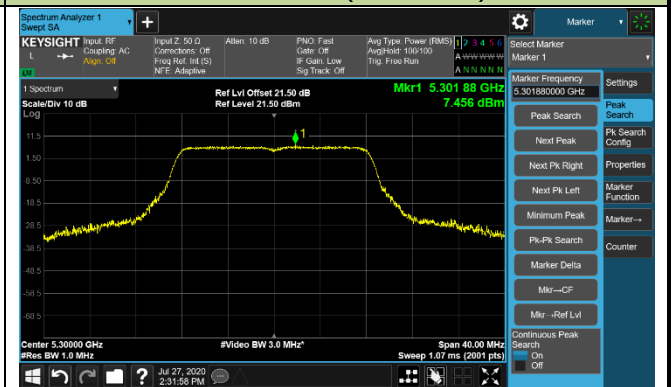


Channel 64 (5320MHz)

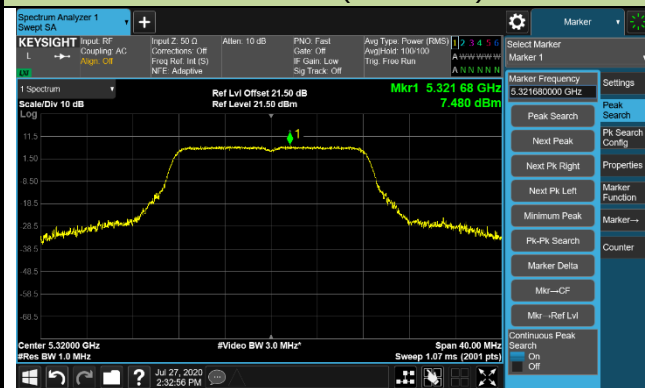


Channel 100 (5500MHz)

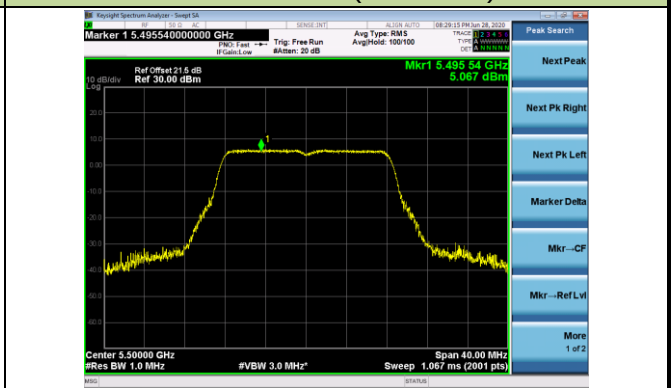


Channel 116 (5580MHz)

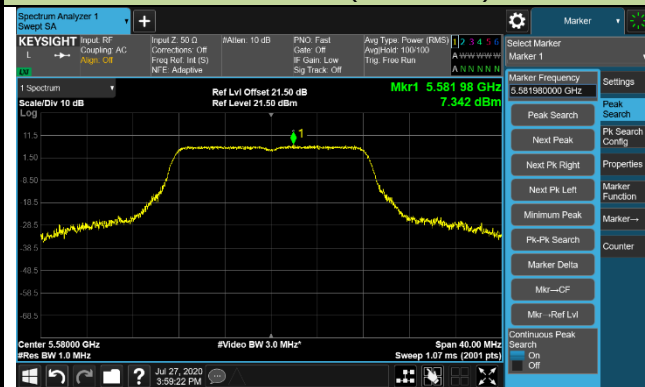

Channel 140 (5700MHz)

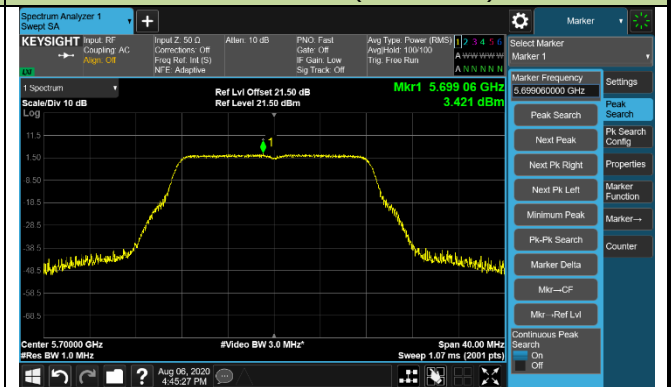


Channel 144 (5720MHz)

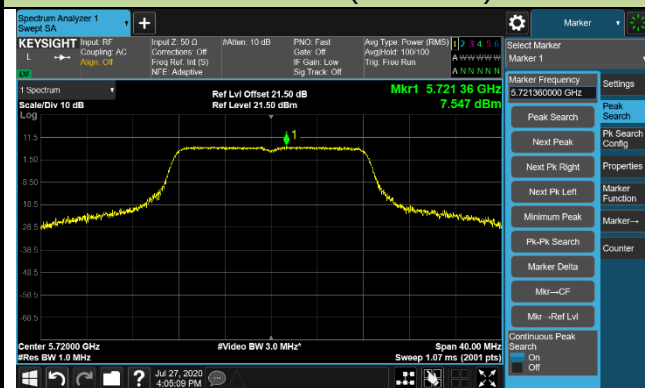


802.11ac-VHT20 Power Spectral Density - Ant 1 / Ant 0 + 1 (CDD Mode)


Channel 52 (5260MHz)

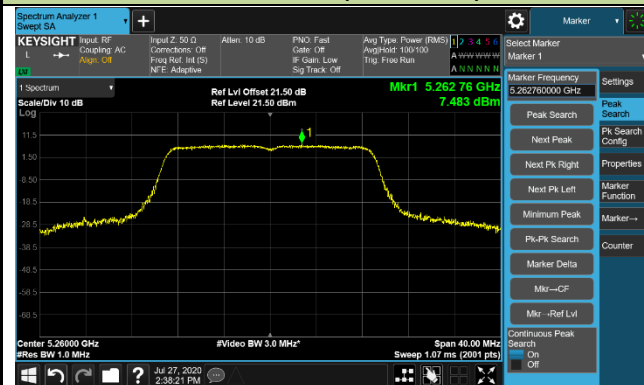


Channel 60 (5300MHz)

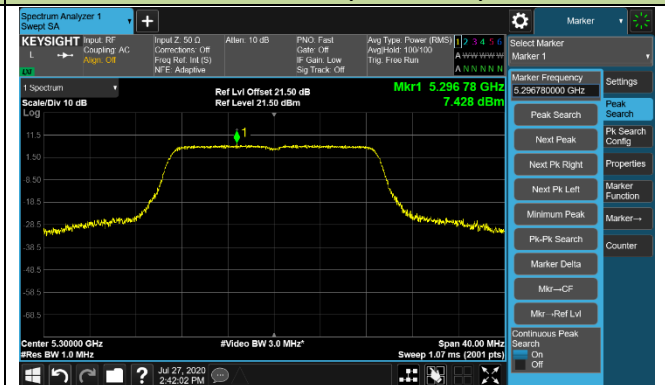


Channel 64 (5320MHz)

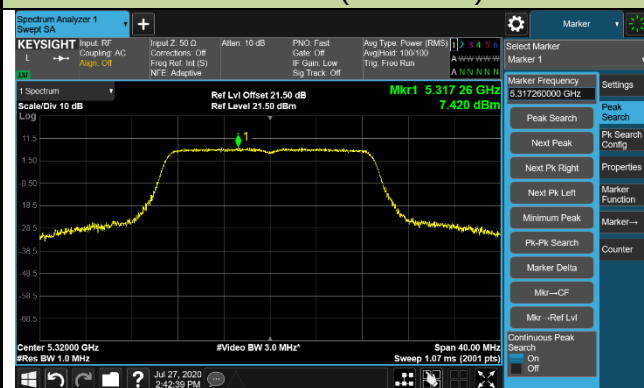


Channel 100 (5500MHz)

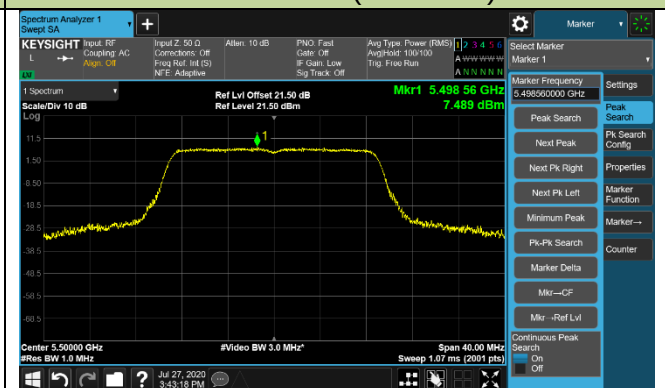


Channel 116 (5580MHz)

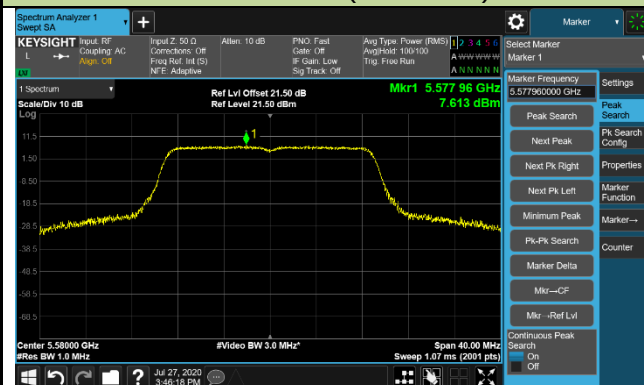

Channel 140 (5700MHz)

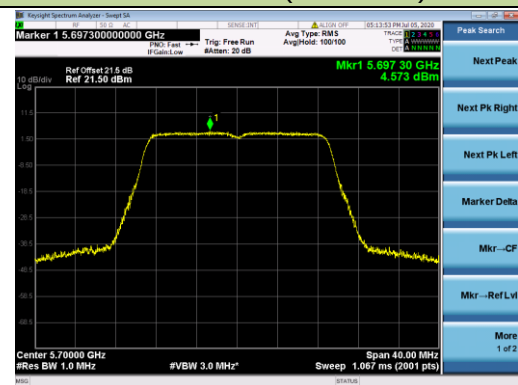


Channel 144 (5720MHz)

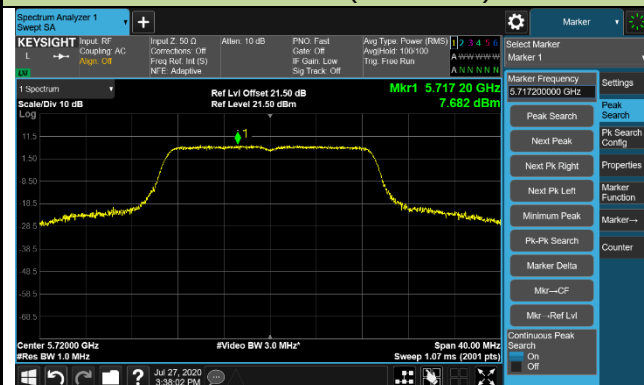


802.11ac-VHT40 Power Spectral Density - Ant 1 / Ant 0 + 1 (CDD Mode)


Channel 54 (5270MHz)

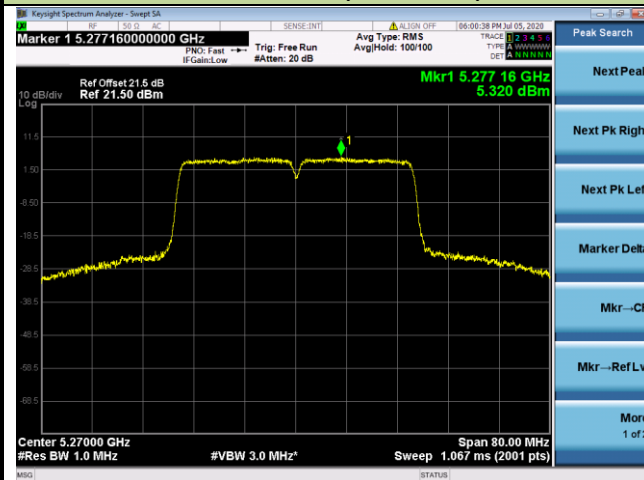


Channel 62 (5310MHz)

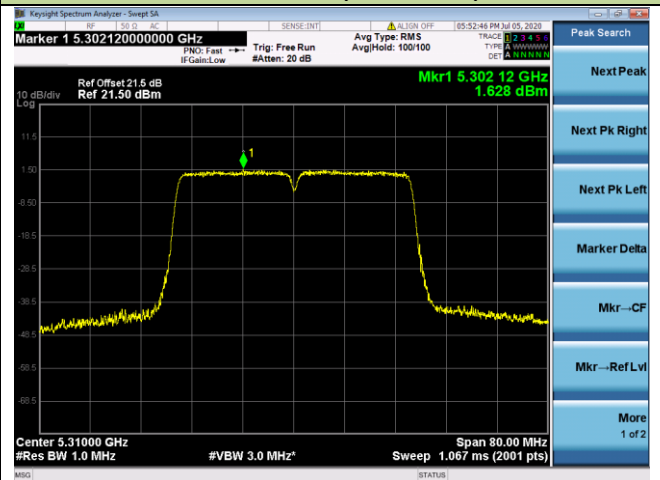


Channel 102 (5510MHz)

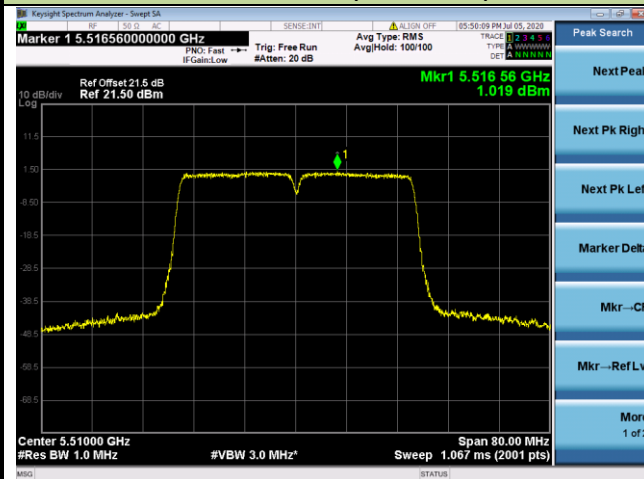


Channel 110 (5550MHz)

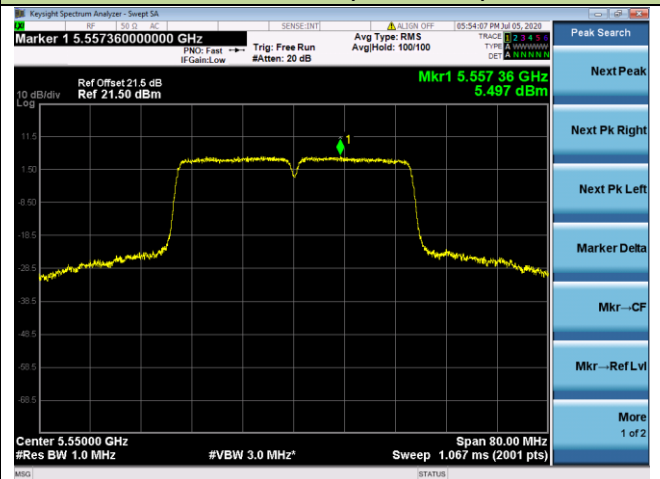

Channel 134 (5670MHz)

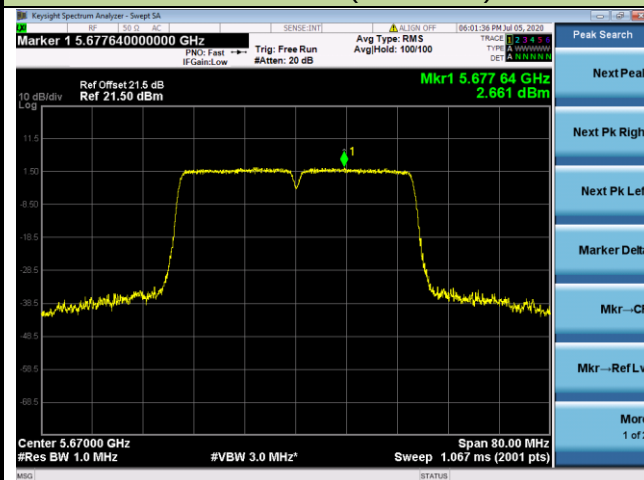


Channel 142 (5710MHz)

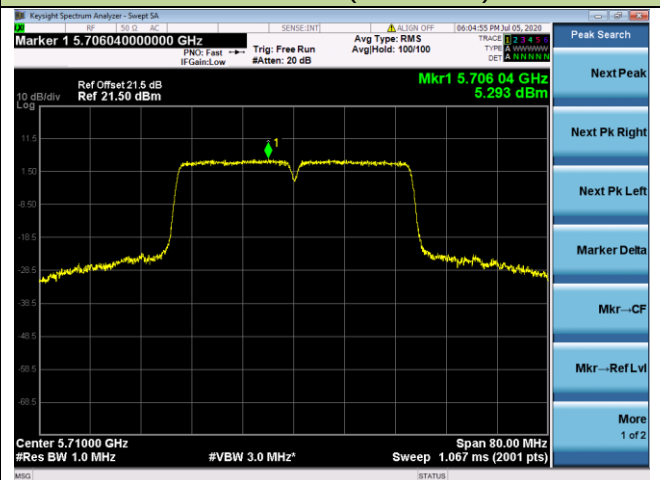


802.11ac-VHT80 Power Spectral Density - Ant 1 / Ant 0 + 1 (CDD Mode)


Channel 58 (5290MHz)

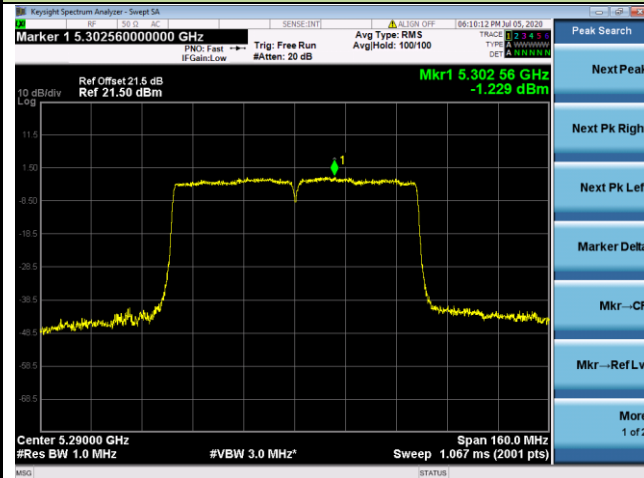


Channel 106 (5530MHz)

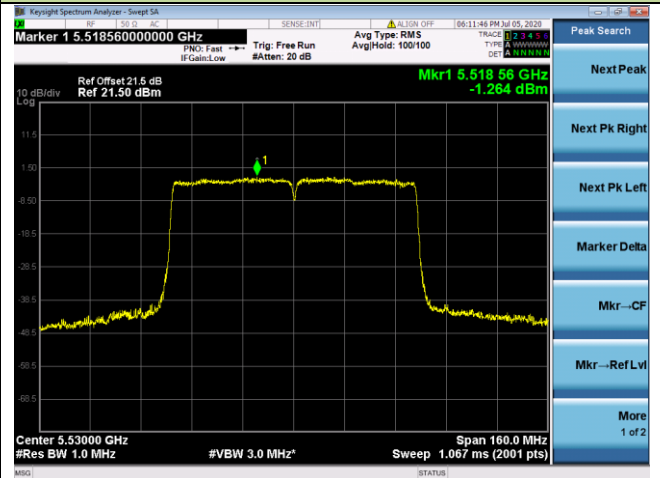

Channel 122 (5610MHz)

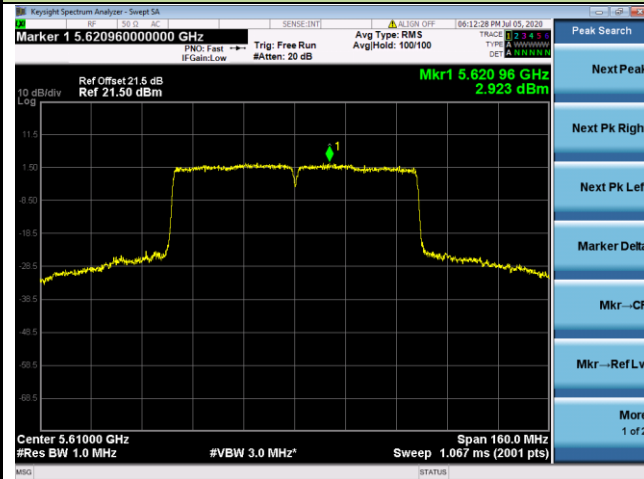

Channel 138 (5690MHz)

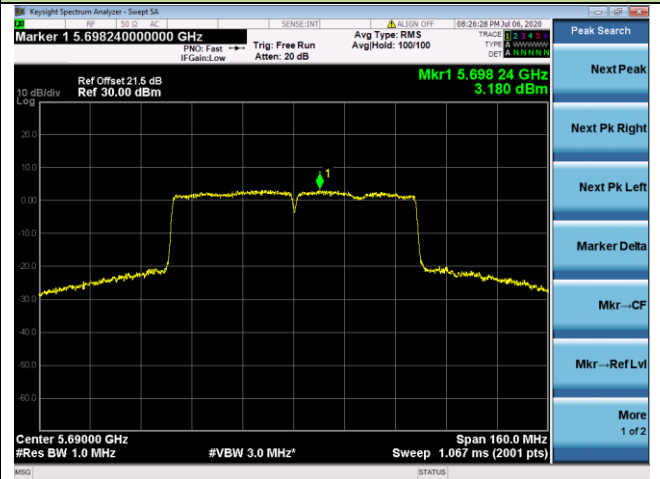


802.11ax-HE20 Power Spectral Density - Ant 1 / Ant 0 + 1 (CDD Mode)


Channel 52 (5260MHz)




Channel 60 (5300MHz)

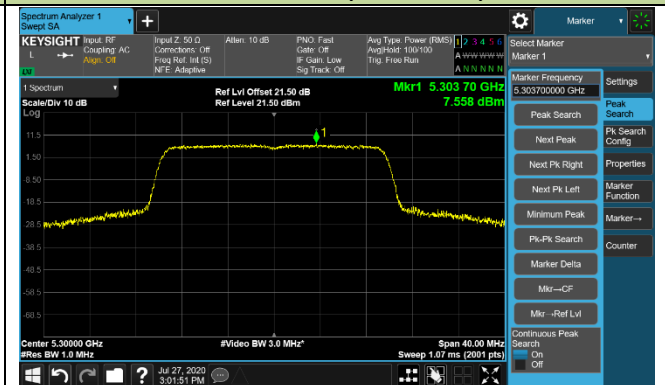


Channel 64 (5320MHz)

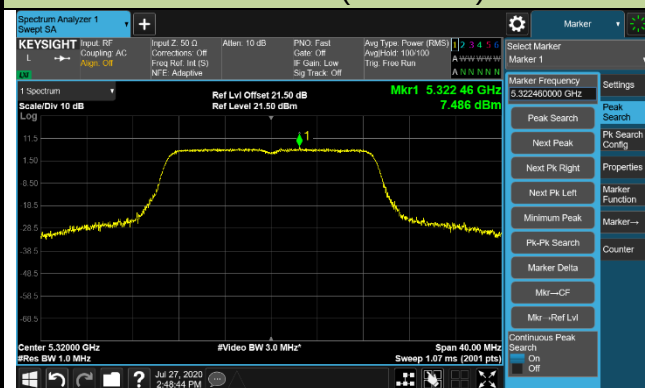


Channel 100 (5500MHz)

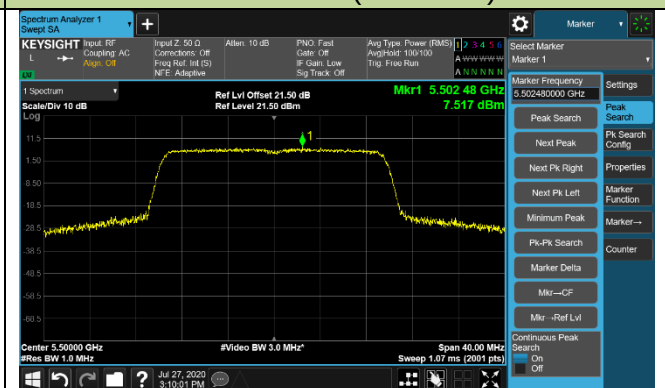


Channel 116 (5580MHz)

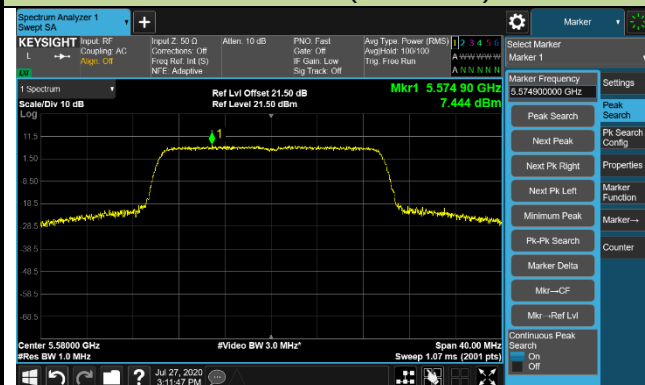

Channel 140 (5700MHz)

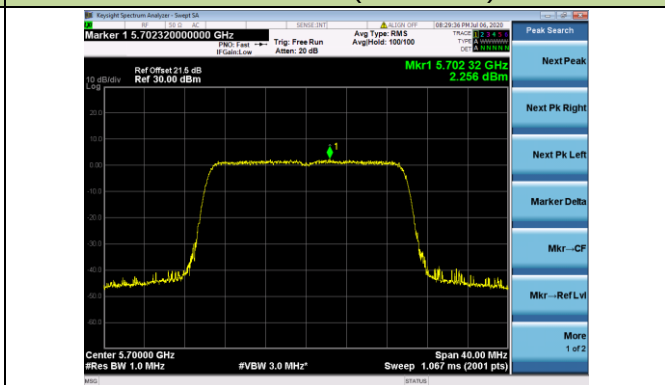


Channel 144 (5720MHz)

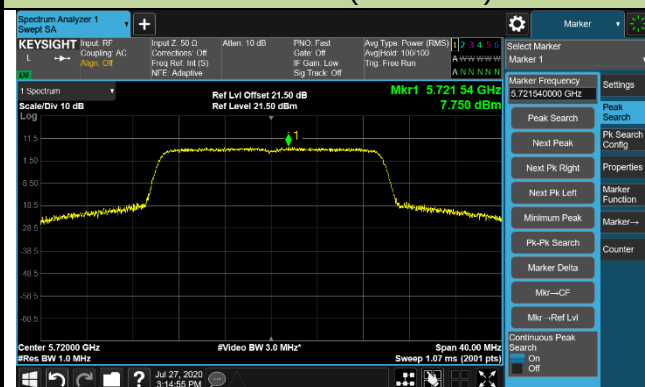


802.11ax-HE40 Power Spectral Density - Ant 1 / Ant 0 + 1 (CDD Mode)


Channel 54 (5270MHz)

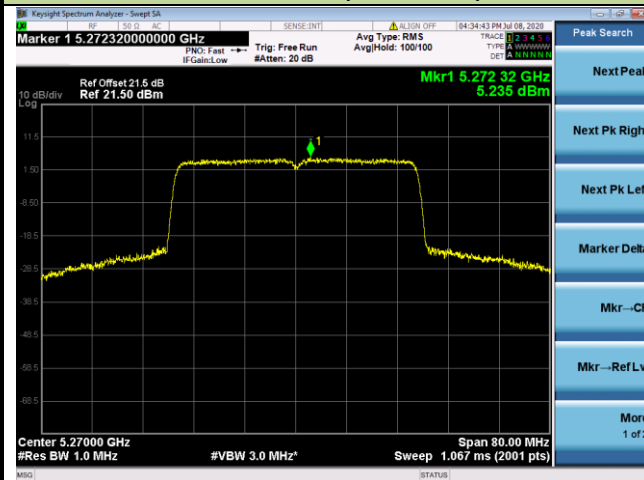


Channel 62 (5310MHz)

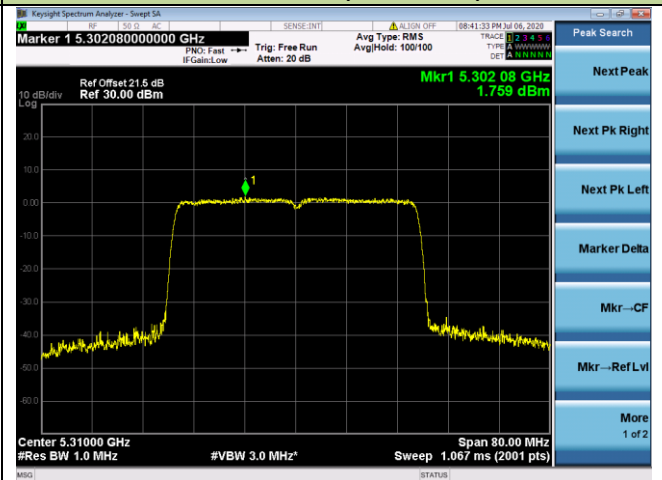


Channel 102 (5510MHz)

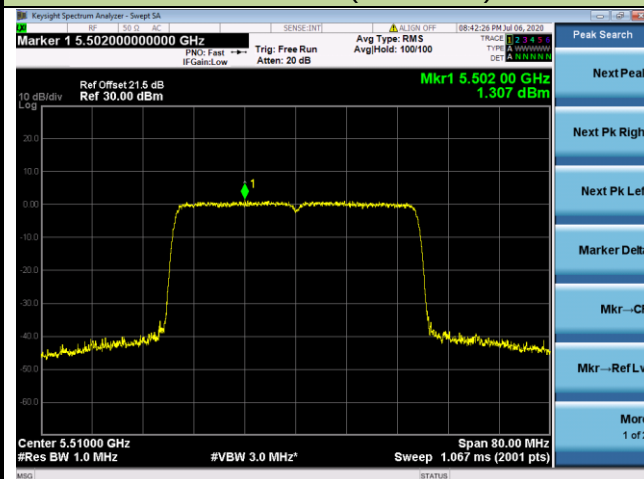


Channel 110 (5550MHz)

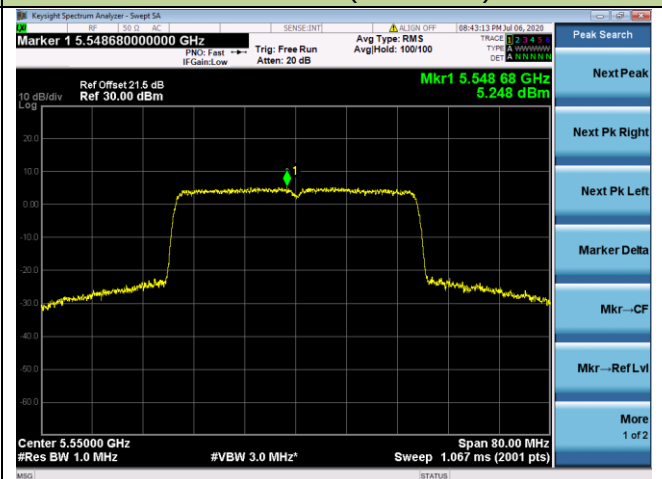

Channel 134 (5670MHz)

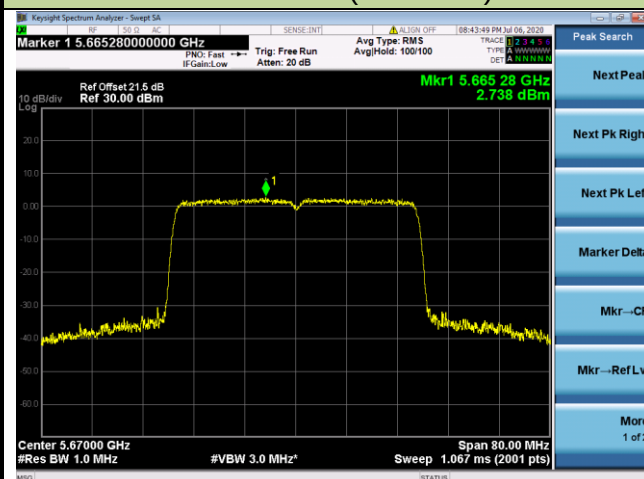


Channel 142 (5710MHz)

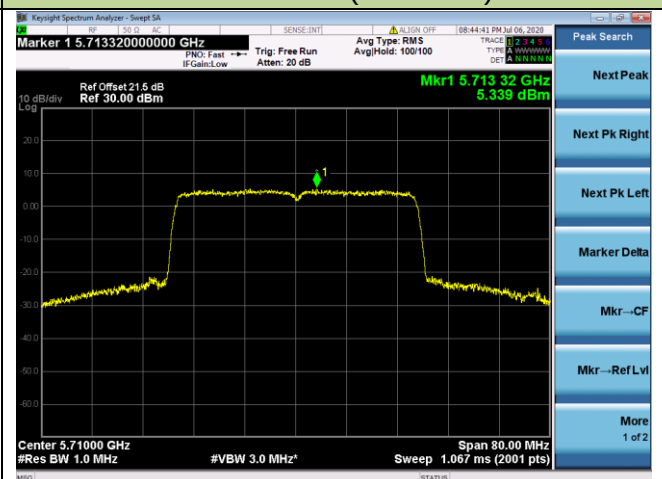


802.11ax-HE80 Power Spectral Density - Ant 1 / Ant 0 + 1 (CDD Mode)


Channel 58 (5290MHz)

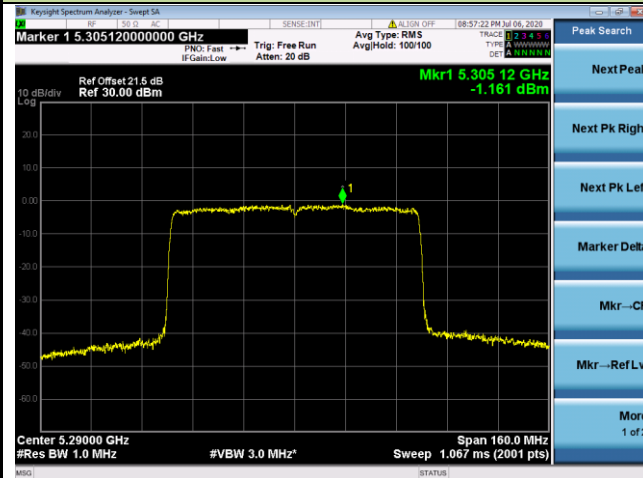


Channel 106 (5530MHz)

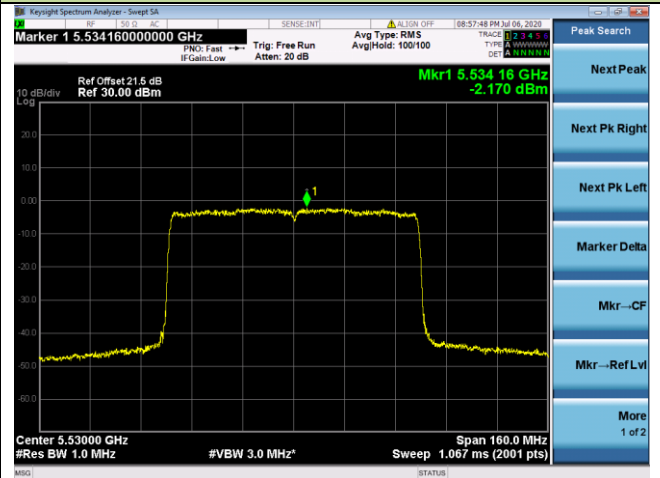

Channel 122 (5610MHz)

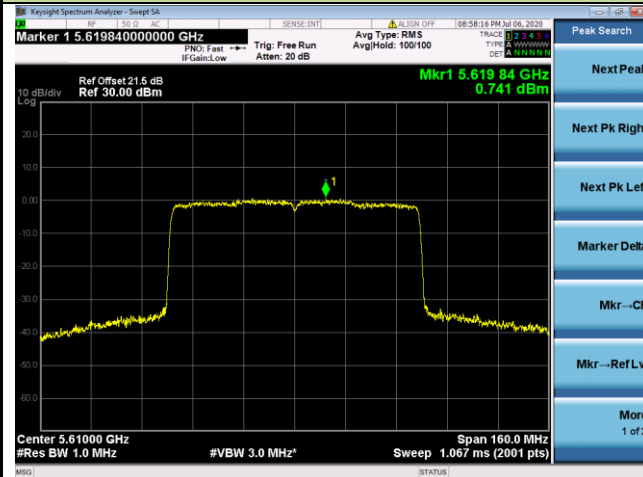

Channel 138 (5690MHz)

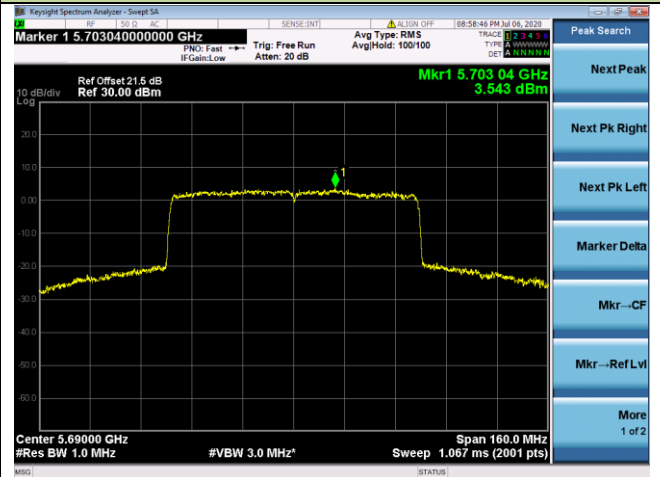


5.7. 操作頻帶外的峰值發射

5.7.1. 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範之第 5.7.3 節：


- (1) 在 5.15 GHz~5.35 GHz 及 5.470 GHz~5.725 GHz 頻段操作的發射器：帶外發射之有效等向輻射功率(EIRP) ≤ -27 dBm/MHz。
- (2) 在 5.725 GHz~5.850 GHz 的頻段操作之發射器：所有頻帶邊緣向外 5 MHz 內頻率之發射，有效等向輻射功率(EIRP) ≤ 27 dBm/MHz~15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5 MHz~25 MHz，有效等向輻射功率(EIRP) ≤ 15.6 dBm/MHz~10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25 MHz~75 MHz，有效等向輻射功率(EIRP) ≤ 10 dBm/MHz~-27 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 ≥ 75 MHz 的頻率之發射，有效等向輻射功率(EIRP) ≤ -27 dBm/MHz；

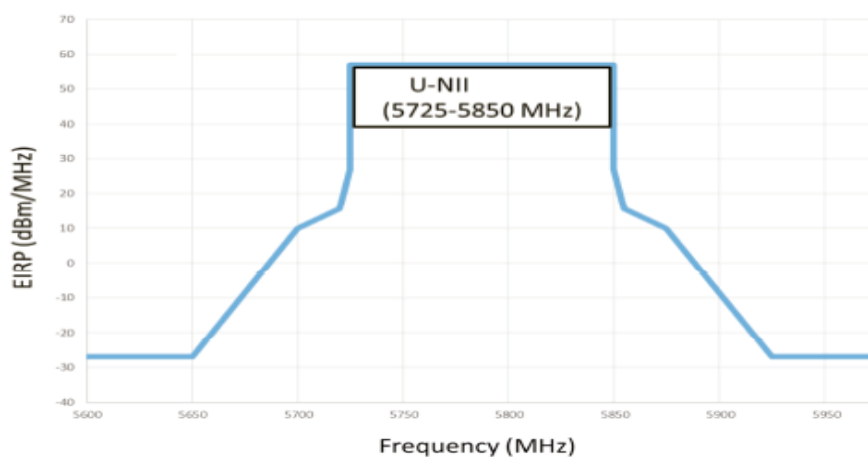

5.7.2. 量測方法


高頻待測物置於高 150 公分之非導體桌面，受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。

5.7.3. 測試架構圖

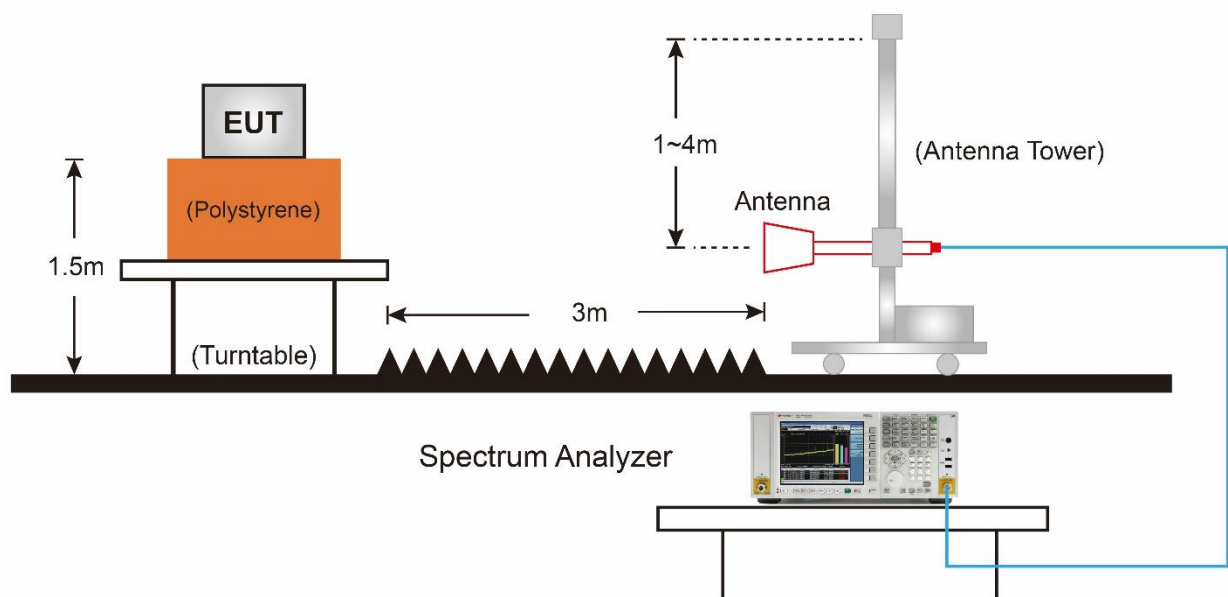

5.7.4. 操作頻帶外的峰值發射測試結果

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

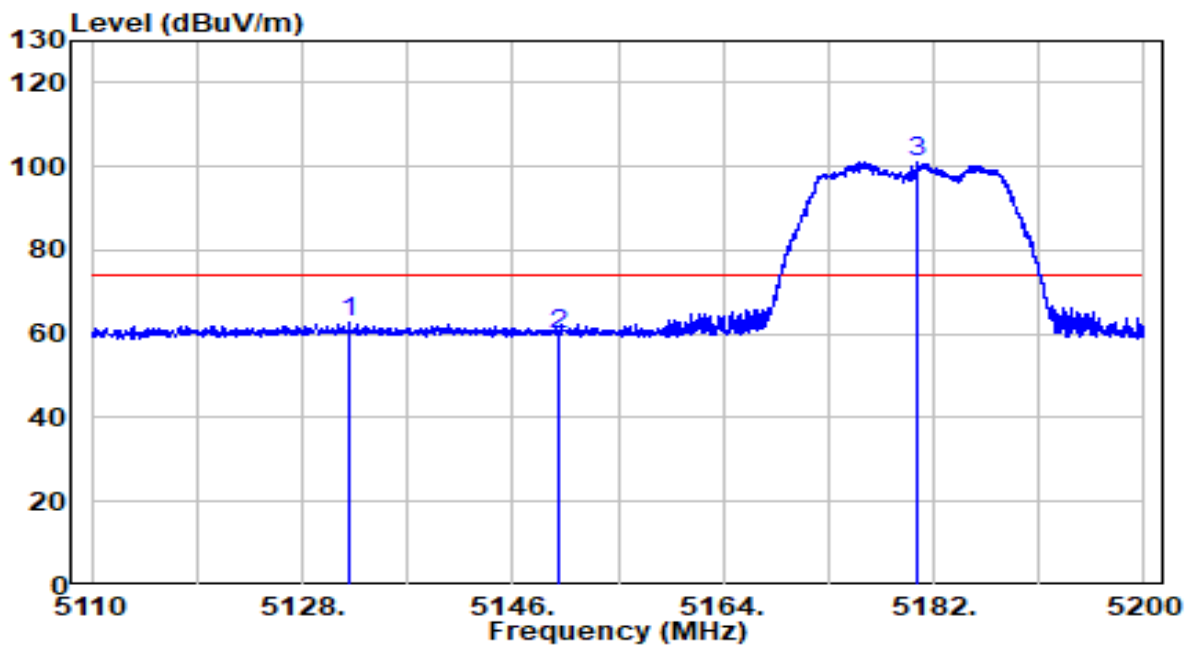


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5131.960	42.93	19.89	62.81	-11.19	74.00	Peak
2	5150.000	40.02	19.91	59.93	-14.07	74.00	Peak
3	* 5180.650	81.06	19.94	101.00	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

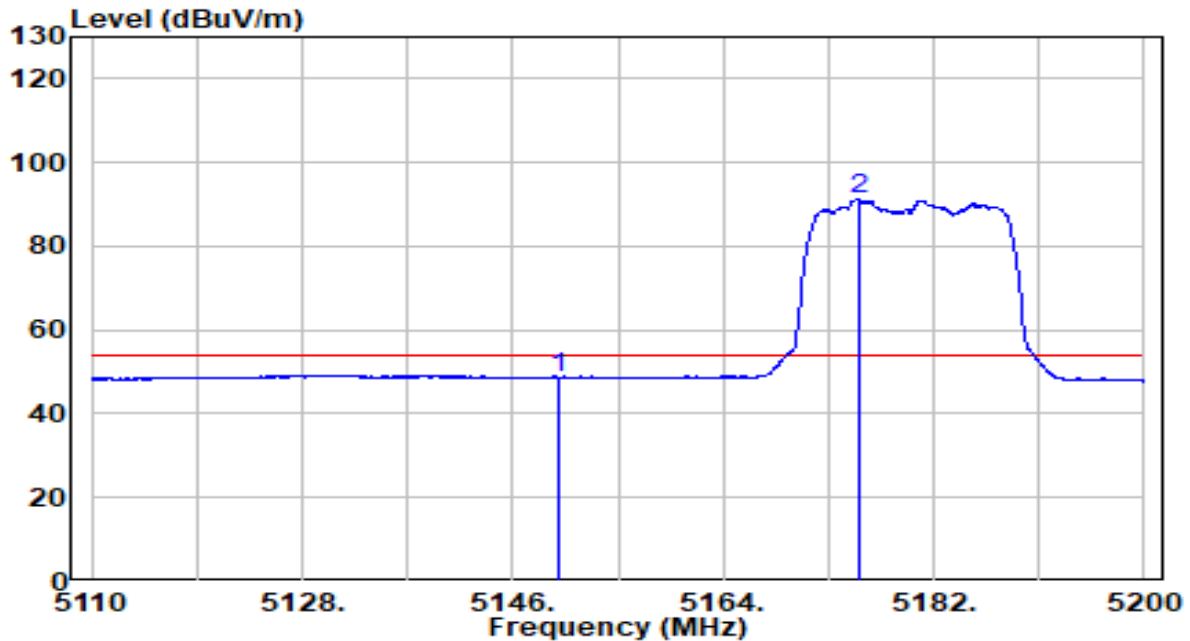


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5150.000	28.84	19.91	48.74	-5.26	54.00	Average
2	* 5175.610	71.36	19.93	91.30	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

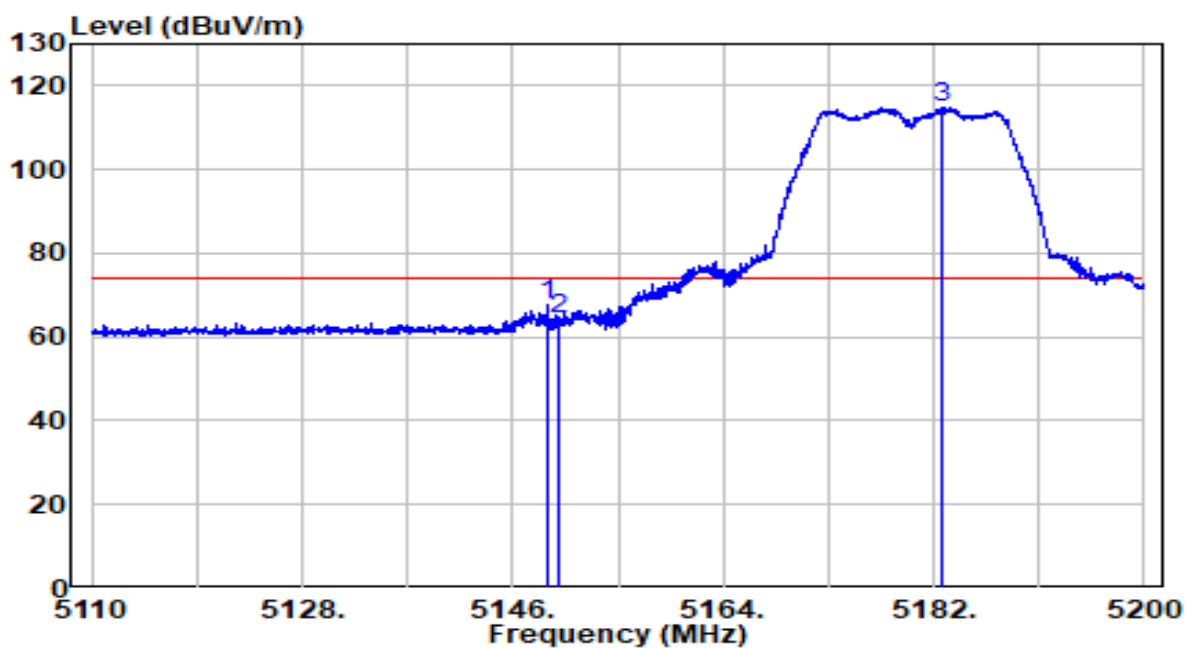


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.015	47.73	19.90	67.63	-6.37	74.00	Peak
2	5150.000	44.12	19.91	64.03	-9.97	74.00	Peak
3	* 5182.675	94.65	19.94	114.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

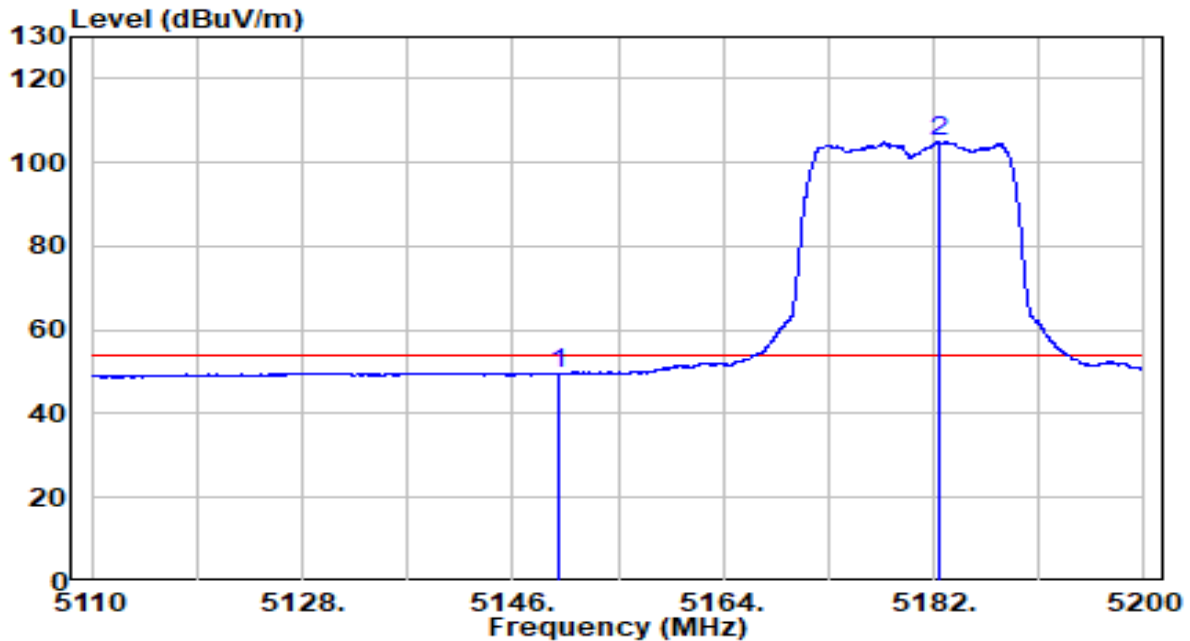


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.73	19.91	49.64	-4.36	54.00	Average
2	* 5182.405	84.94	19.94	104.88	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

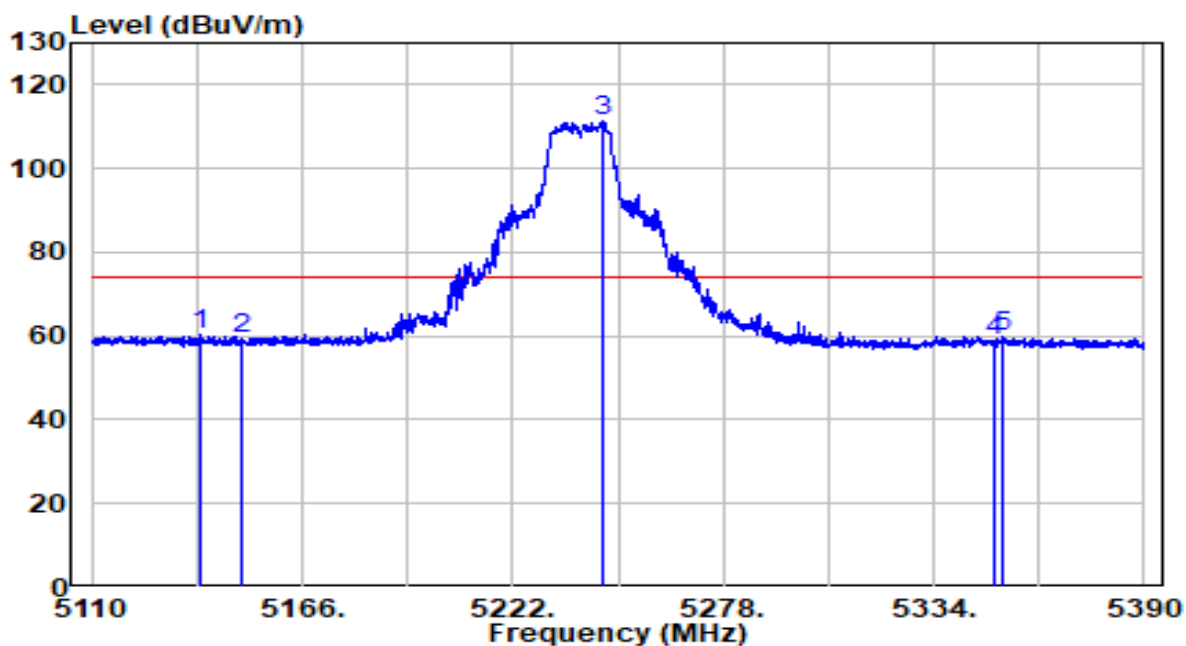


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5138.840	40.46	19.89	60.36	-13.64	74.00	Peak
2	5150.000	39.65	19.91	59.55	-14.45	74.00	Peak
3	* 5245.660	91.21	20.01	111.22	N/A	N/A	Peak
4	5350.000	38.71	20.11	58.83	-15.17	74.00	Peak
5	5352.620	39.62	20.12	59.74	-14.26	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

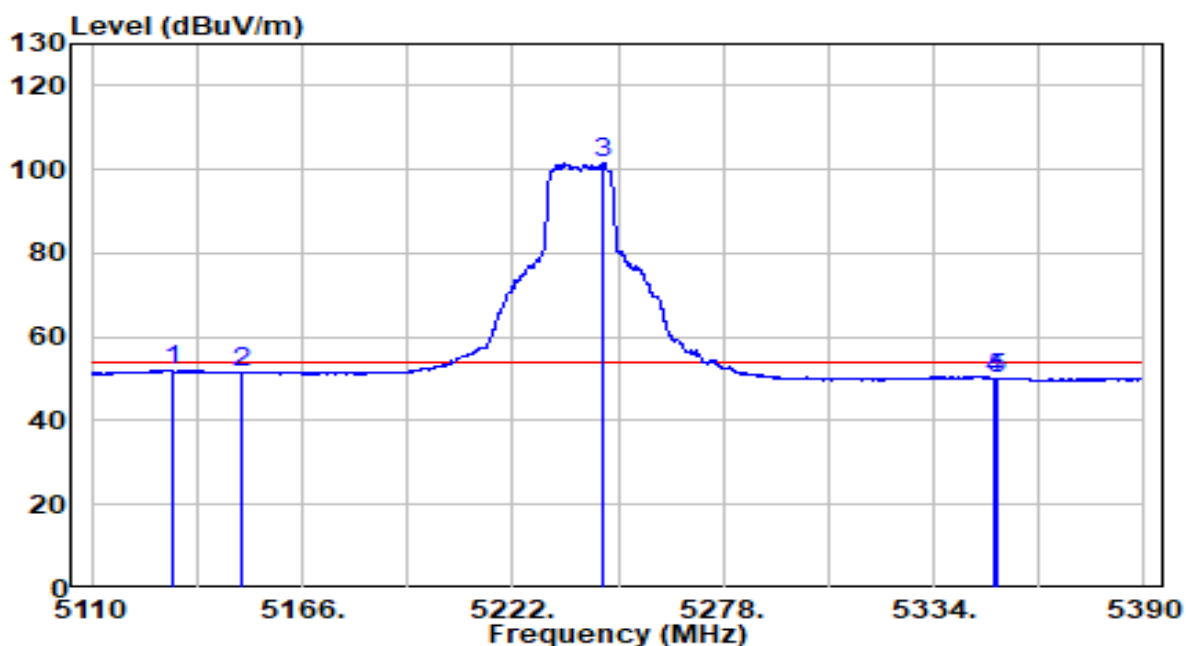


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5131.420	32.05	19.89	51.93	-2.07	54.00	Average
2	5150.000	31.52	19.91	51.43	-2.57	54.00	Average
3	* 5245.940	81.73	20.01	101.73	N/A	N/A	Average
4	5350.000	29.91	20.11	50.02	-3.98	54.00	Average
5	5350.940	29.97	20.11	50.08	-3.92	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

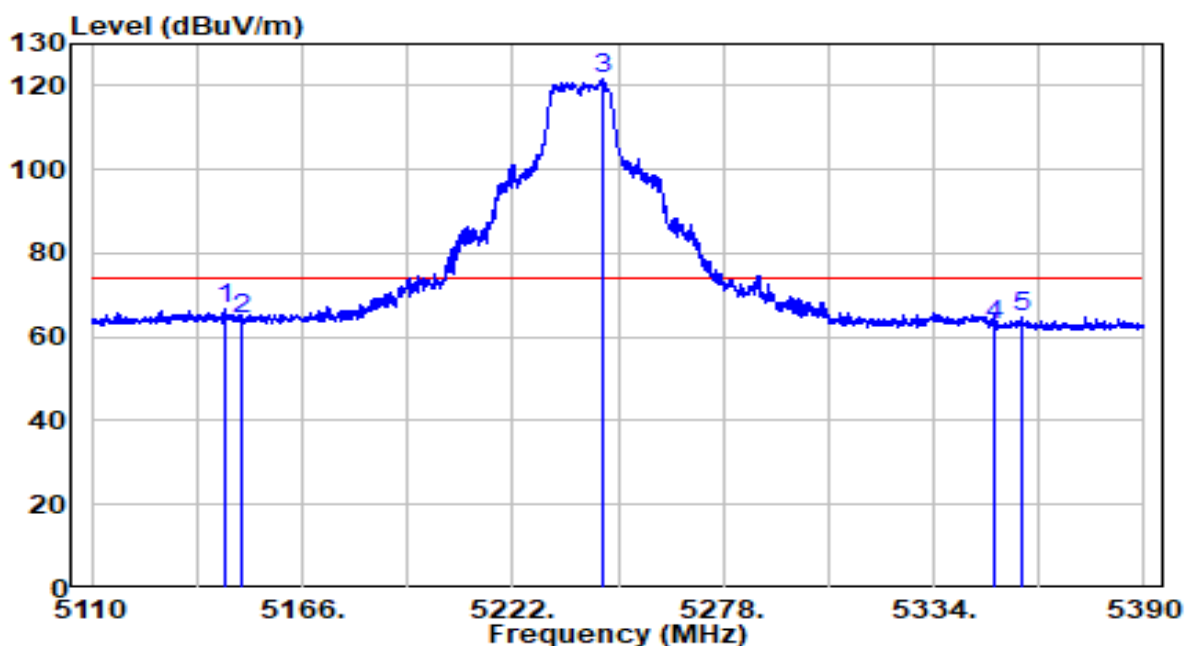


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.280	46.80	19.90	66.70	-7.30	74.00	Peak
2	5150.000	44.31	19.91	64.21	-9.79	74.00	Peak
3	* 5246.080	101.44	20.01	121.45	N/A	N/A	Peak
4	5350.000	42.70	20.11	62.82	-11.18	74.00	Peak
5	5357.800	44.43	20.12	64.55	-9.45	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

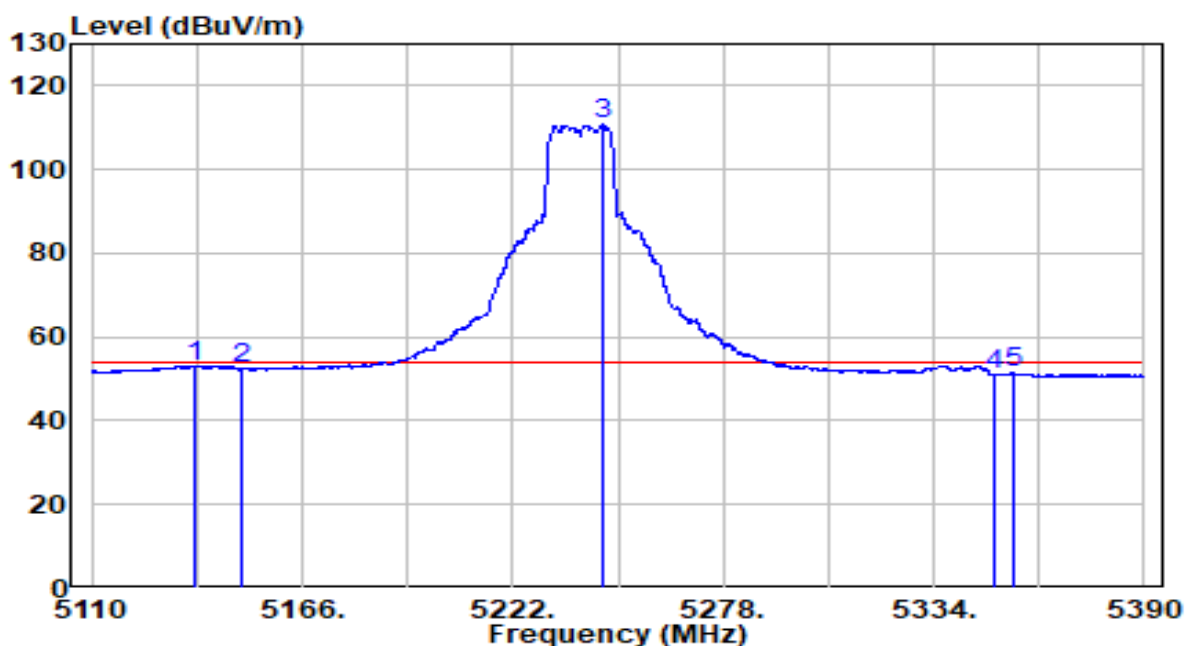


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5137.580	33.31	19.89	53.20	-0.80	54.00	Average
2	5150.040	32.39	19.91	52.30	-1.70	54.00	Average
3	* 5245.800	91.02	20.01	111.02	N/A	N/A	Average
4	5350.000	30.96	20.11	51.07	-2.93	54.00	Average
5	5355.280	31.18	20.12	51.30	-2.70	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

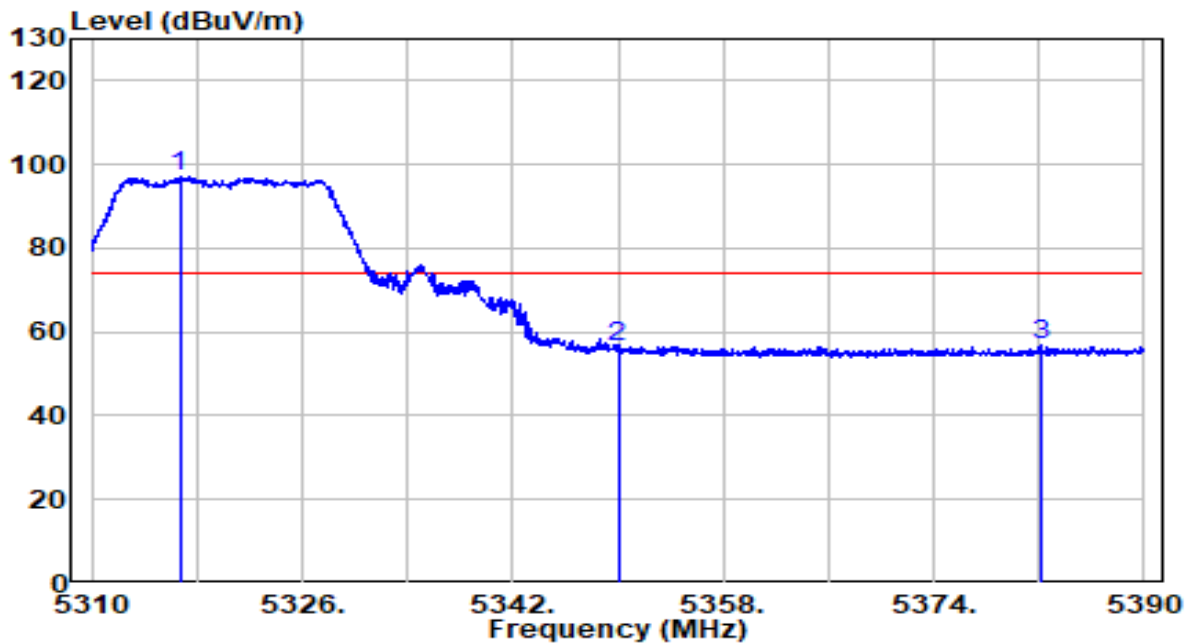


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5316.680	76.93	20.08	97.01	N/A	N/A	Peak
2		5350.000	36.39	20.11	56.50	-17.50	74.00	Peak
3		5382.200	36.92	20.15	57.07	-16.93	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

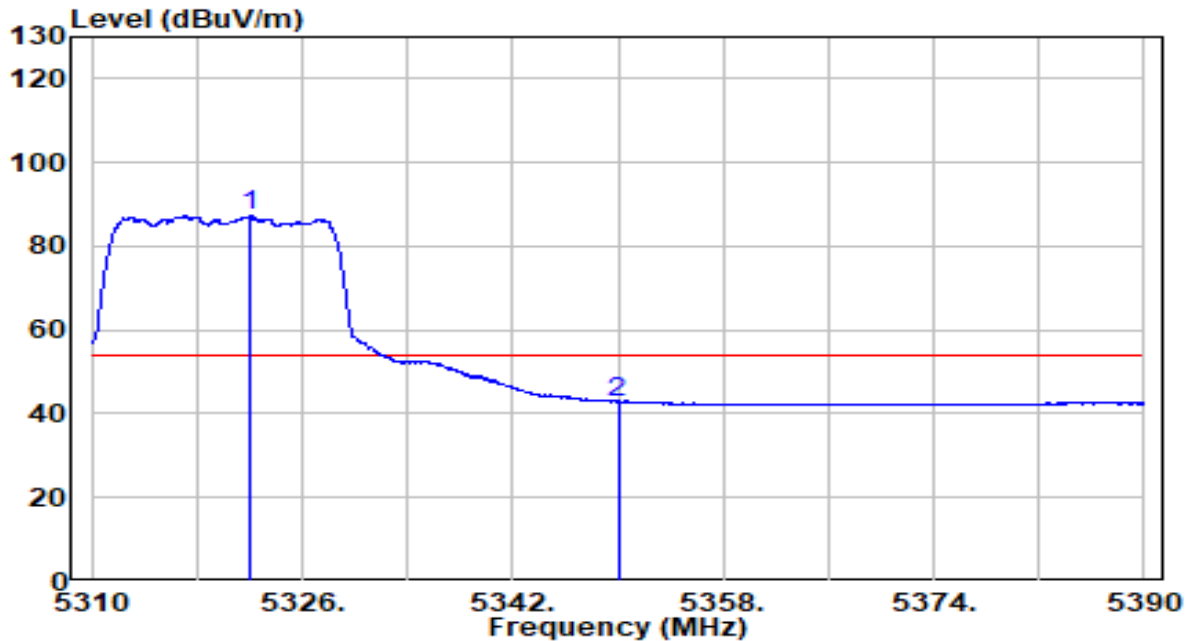


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5322.120	67.12	20.09	87.21	N/A	N/A	Average
2		5350.000	22.66	20.11	42.77	-11.23	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

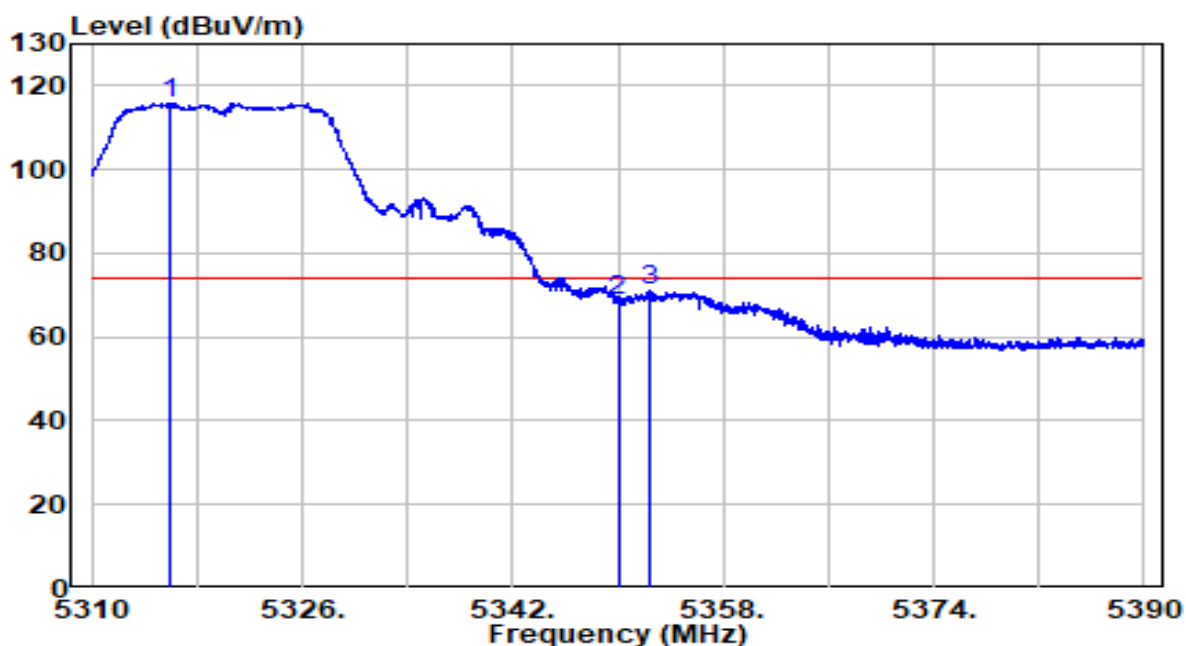


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5315.920	95.70	20.08	115.78	N/A	N/A	Peak
2		5350.000	48.75	20.11	68.87	-5.13	74.00	Peak
3		5352.360	50.93	20.12	71.04	-2.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

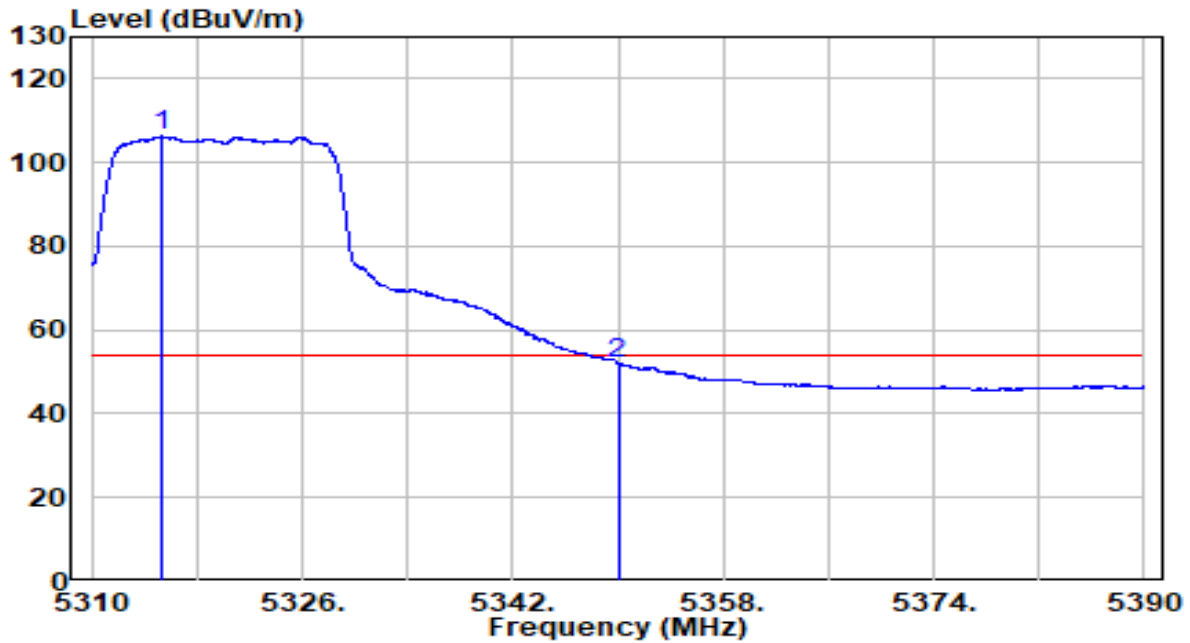


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5315.320	86.20	20.08	106.28	N/A	N/A	Average
2		5350.000	32.10	20.11	52.21	-1.79	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

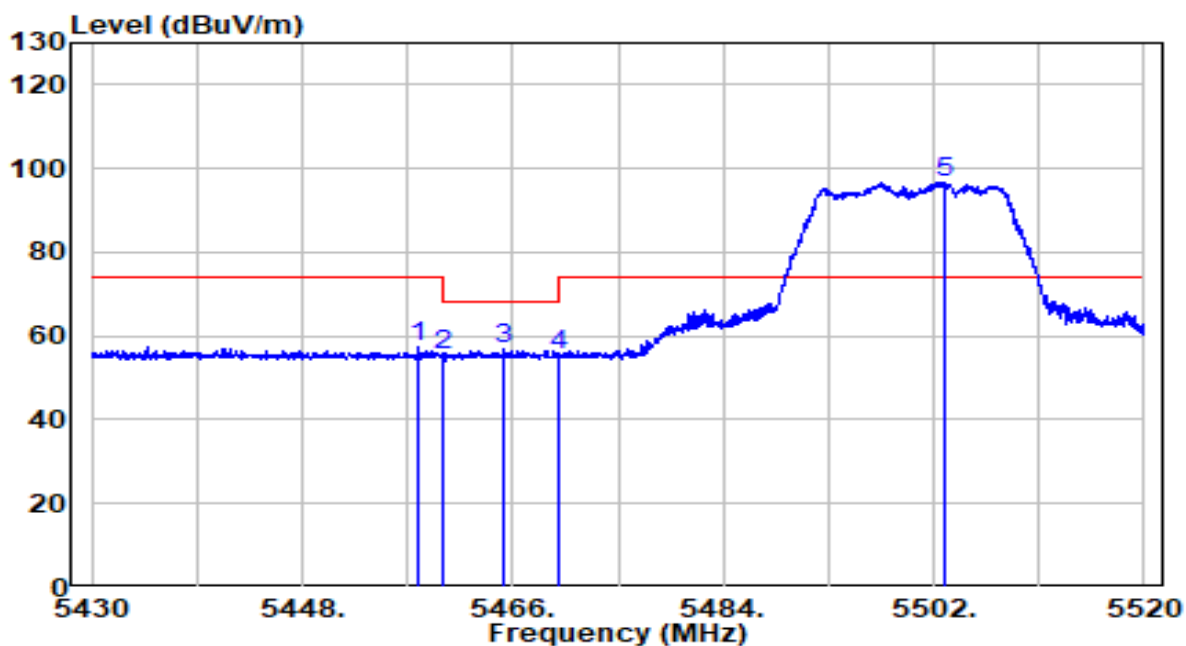


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.945	36.96	20.23	57.19	-16.81	74.00	Peak
2	5460.000	35.37	20.23	55.60	-12.60	68.20	Peak
3	5465.325	36.47	20.23	56.70	-11.50	68.20	Peak
4	5470.000	35.16	20.24	55.40	-12.80	68.20	Peak
5	* 5502.900	76.39	20.28	96.67	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

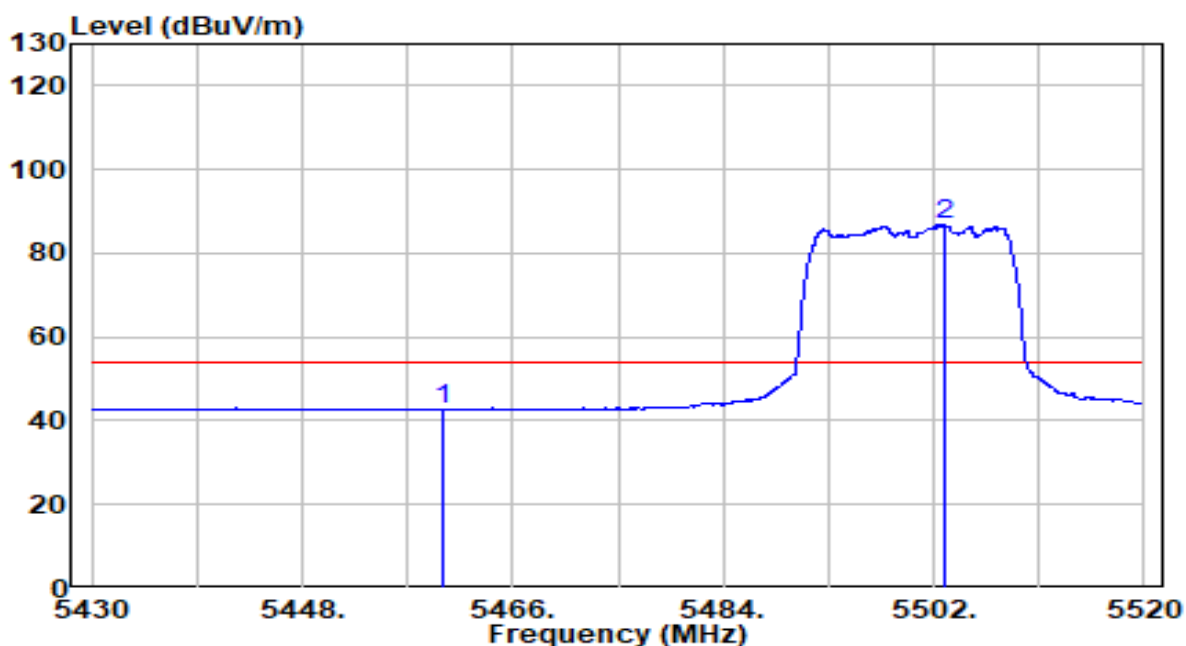


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	22.55	20.23	42.77	-11.23	54.00	Average
2	* 5502.900	66.58	20.28	86.86	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

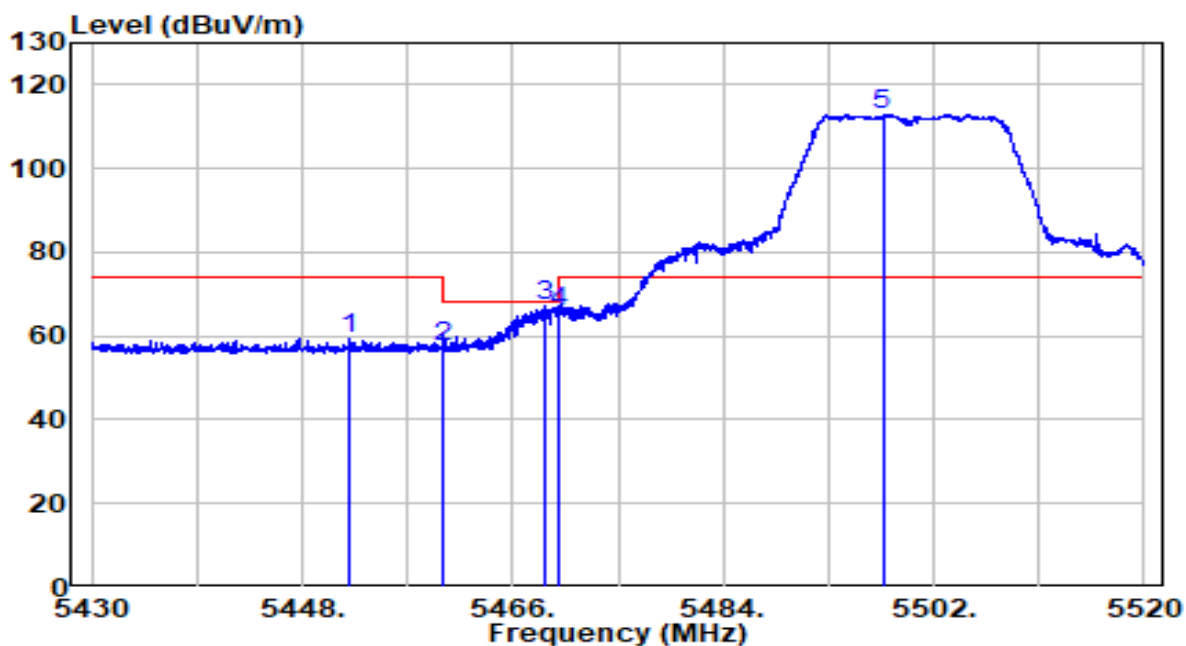


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.095	39.00	20.22	59.22	-14.78	74.00	Peak
2	5460.000	37.02	20.23	57.25	-10.95	68.20	Peak
3	5468.655	46.82	20.24	67.06	-1.14	68.20	Peak
4	5470.000	45.36	20.24	65.60	-2.60	68.20	Peak
5	* 5497.635	92.67	20.27	112.94	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

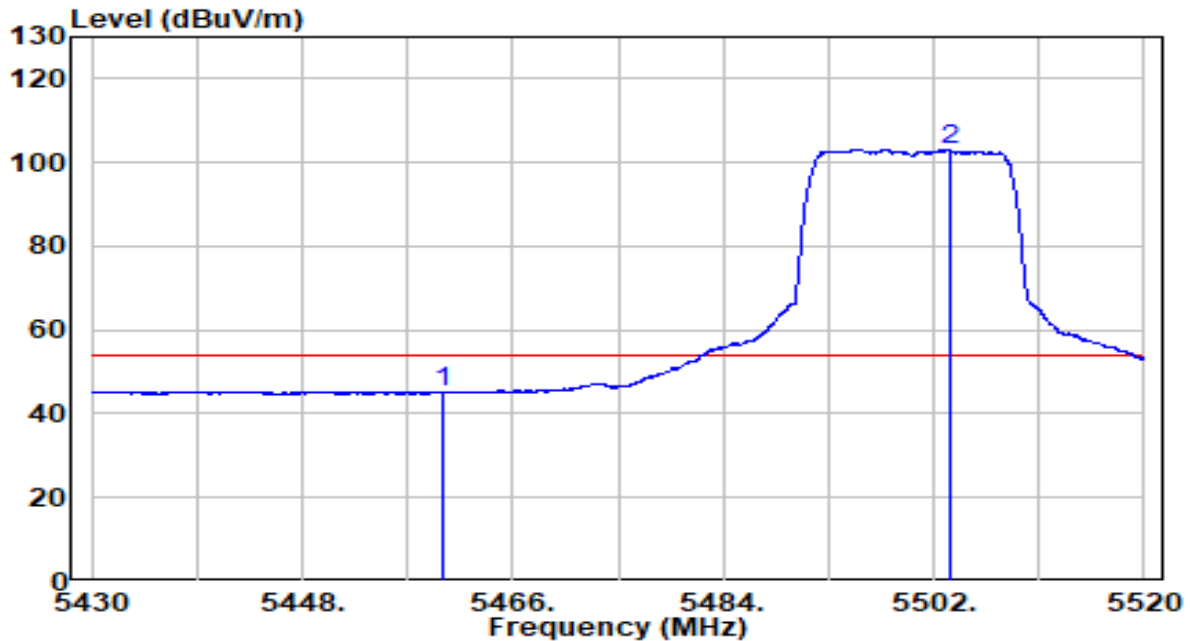


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	24.79	20.23	45.02	-8.98	54.00	Average
2	* 5503.305	82.90	20.28	103.18	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

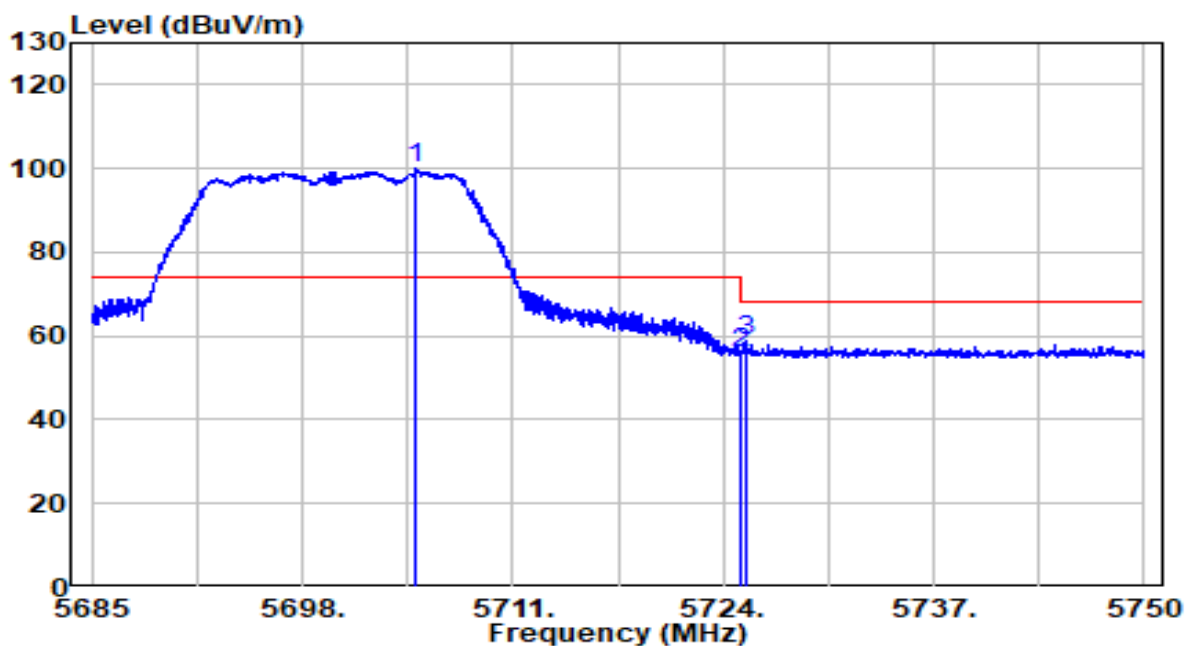


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5705.020	79.18	20.93	100.12	N/A	N/A	Peak
2		5725.000	34.77	21.00	55.77	-12.43	68.20	Peak
3		5725.365	37.64	21.00	58.64	-9.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

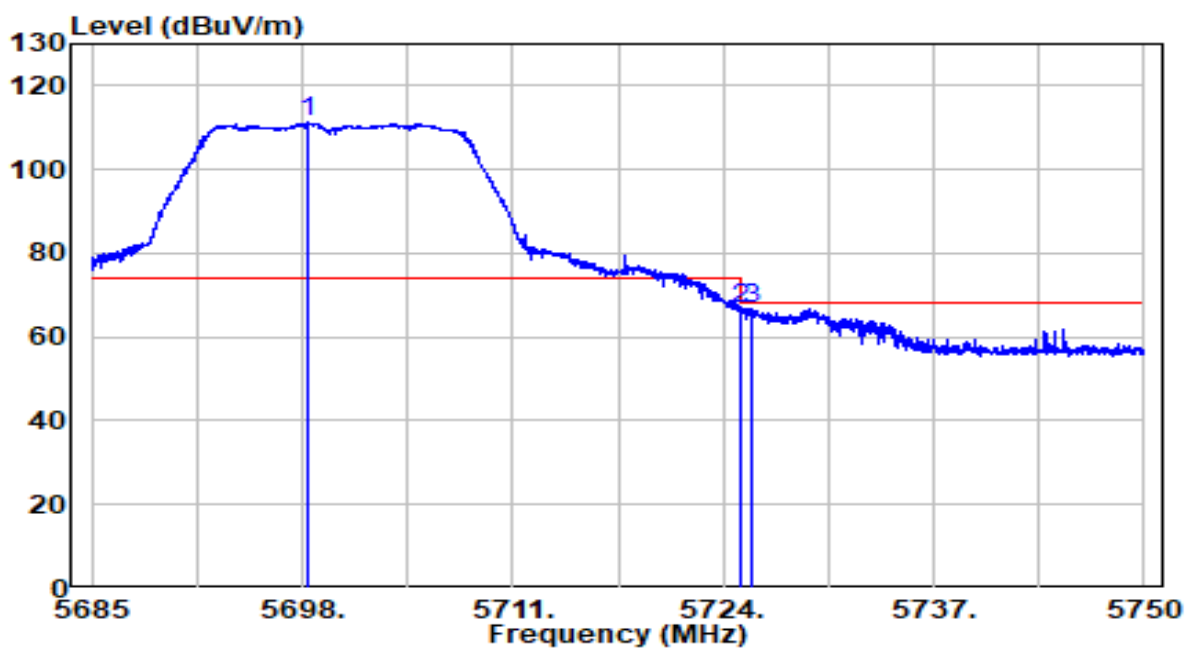


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5698.422	90.24	20.91	111.16	N/A	N/A	Peak
2		5725.000	45.58	21.00	66.58	-1.62	68.20	Peak
3		5725.755	45.85	21.00	66.85	-1.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

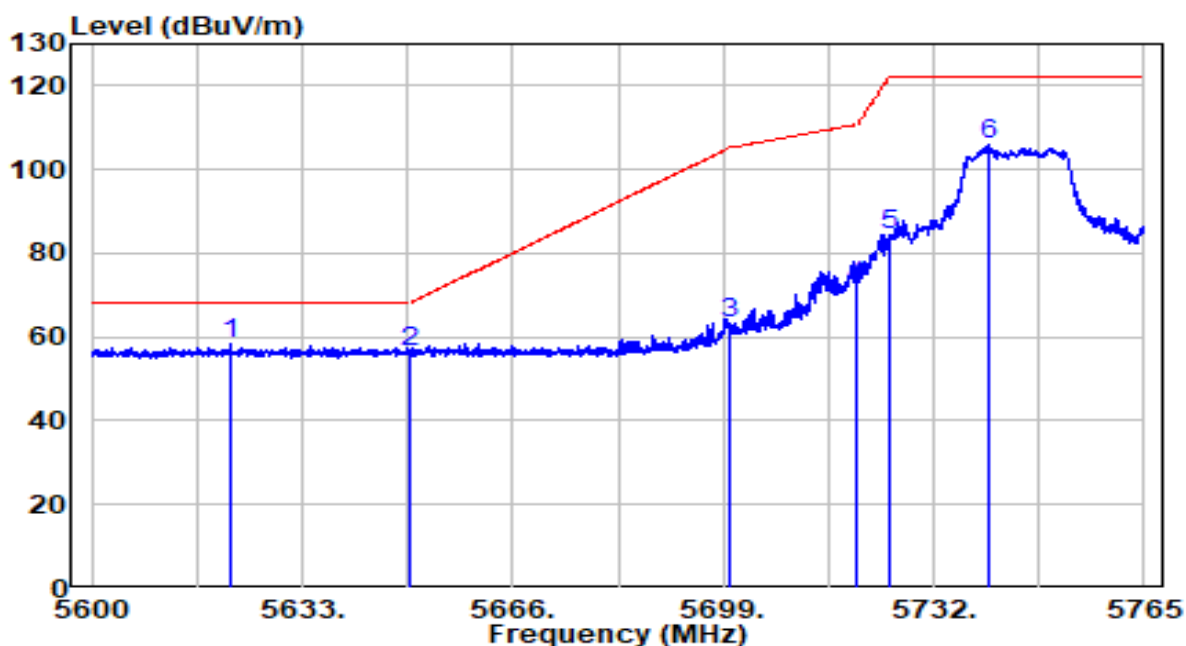


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5621.697	37.79	20.66	58.46	-9.74	68.20	Peak
2		5650.000	35.88	20.76	56.63	-11.57	68.20	Peak
3		5700.000	42.25	20.92	63.16	-42.04	105.20	Peak
4		5720.000	50.94	20.98	71.92	-38.88	110.80	Peak
5		5725.000	63.45	21.00	84.45	-37.75	122.20	Peak
6		5740.498	84.74	21.05	105.79	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

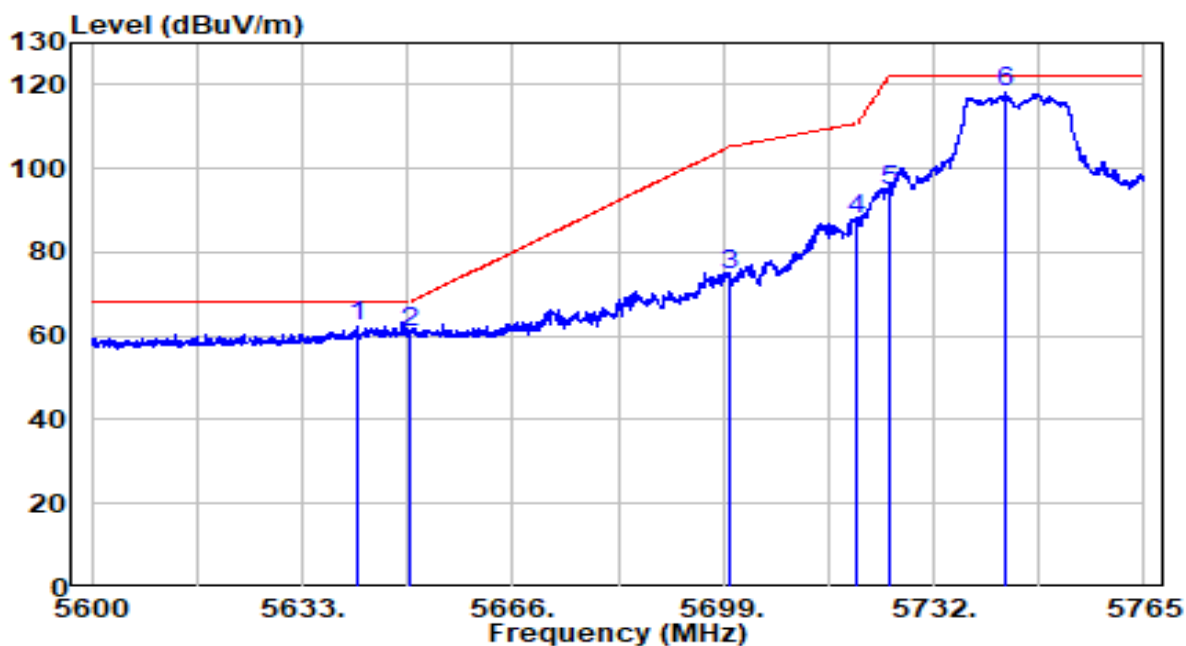


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5641.745	41.38	20.73	62.10	-6.10	68.20	Peak
2	5650.000	39.97	20.76	60.73	-7.47	68.20	Peak
3	5700.000	53.87	20.92	74.79	-30.41	105.20	Peak
4	5720.000	66.80	20.98	87.78	-23.02	110.80	Peak
5	5725.000	73.73	21.00	94.73	-27.47	122.20	Peak
6	* 5743.138	97.13	21.06	118.18	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

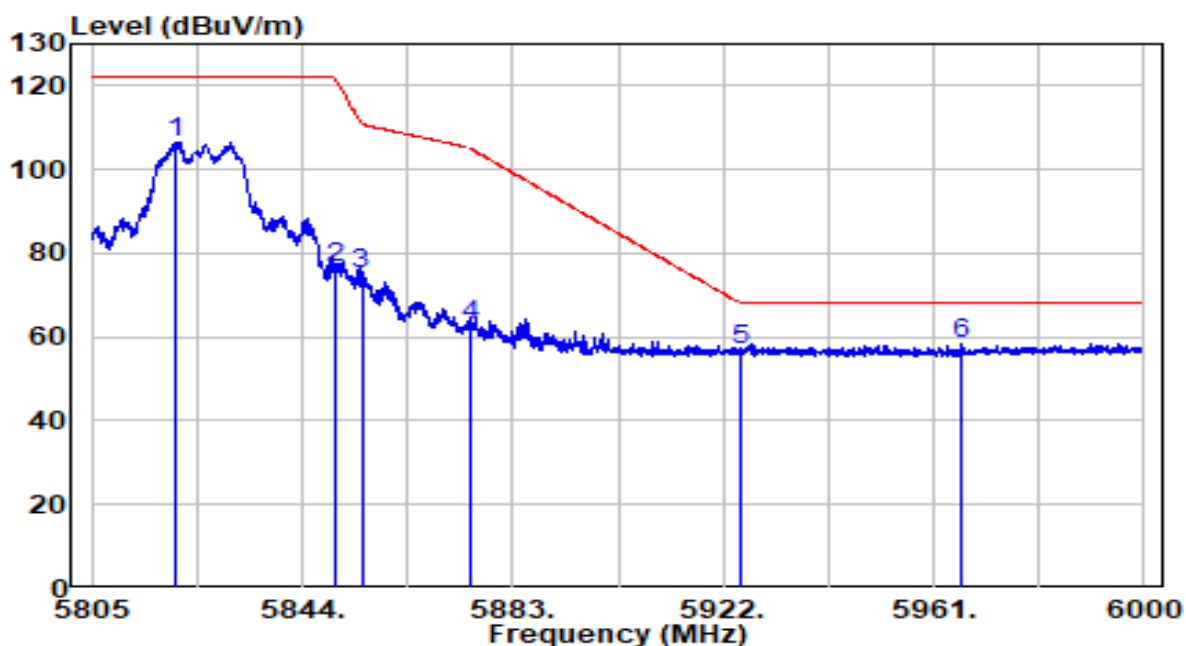


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5820.308	85.28	21.31	106.58	N/A	N/A	Peak
2	5850.000	55.14	21.40	76.54	-45.66	122.20	Peak
3	5855.000	53.51	21.42	74.93	-35.87	110.80	Peak
4	5875.000	41.29	21.49	62.77	-42.43	105.20	Peak
5	5925.000	35.13	21.65	56.78	-11.42	68.20	Peak
6	* 5966.167	36.40	21.78	58.18	-10.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

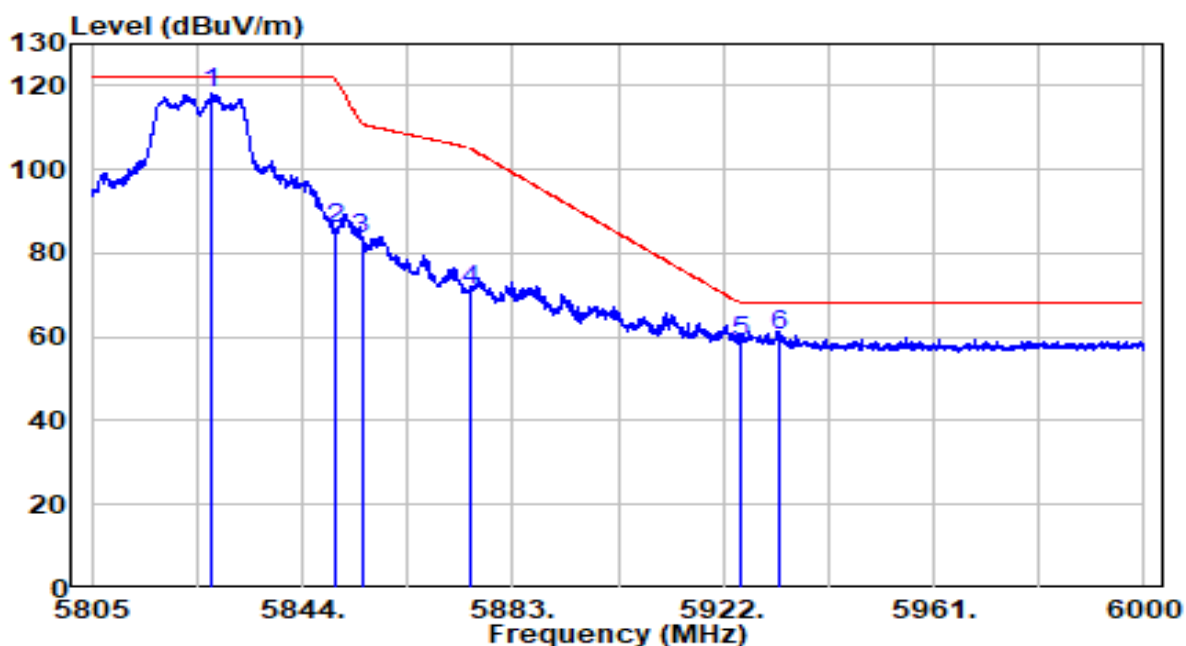


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5827.230	96.90	21.33	118.23	N/A	N/A	Peak
2		5850.000	64.48	21.40	85.88	-36.32	122.20	Peak
3		5855.000	62.16	21.42	83.58	-27.22	110.80	Peak
4		5875.000	49.59	21.49	71.08	-34.12	105.20	Peak
5		5925.000	37.25	21.65	58.90	-9.30	68.20	Peak
6		5932.627	38.49	21.67	60.16	-8.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

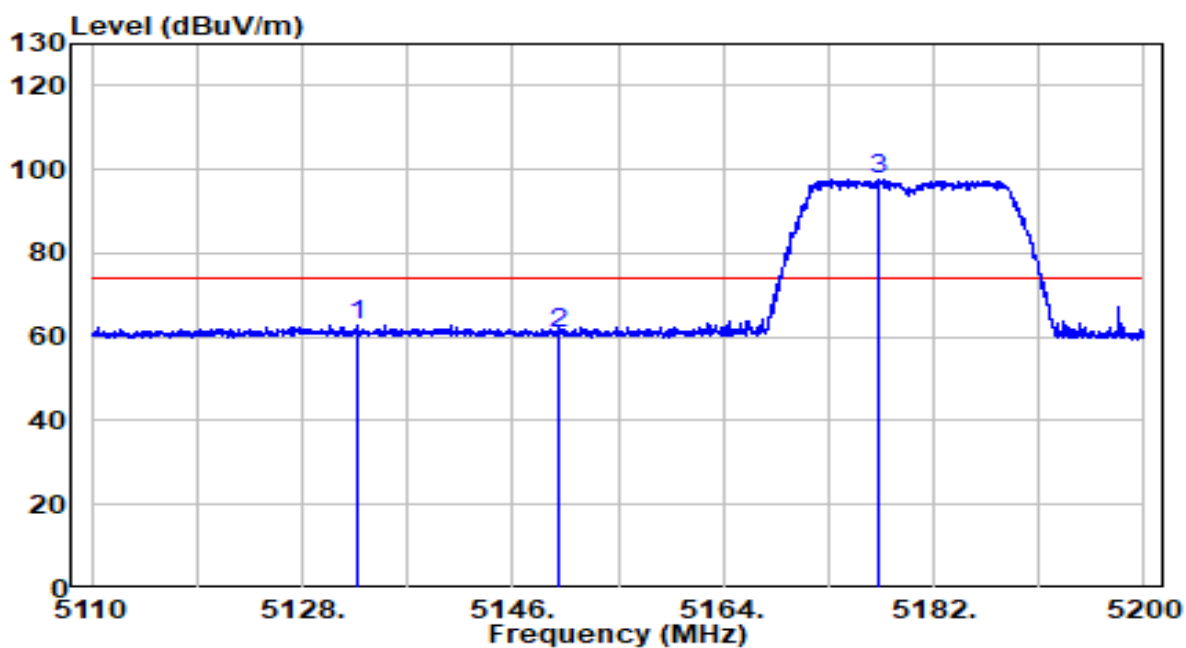


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5132.680	43.11	19.89	63.00	-11.00	74.00	Peak
2	5150.000	40.71	19.91	60.61	-13.39	74.00	Peak
3	* 5177.275	77.88	19.93	97.81	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

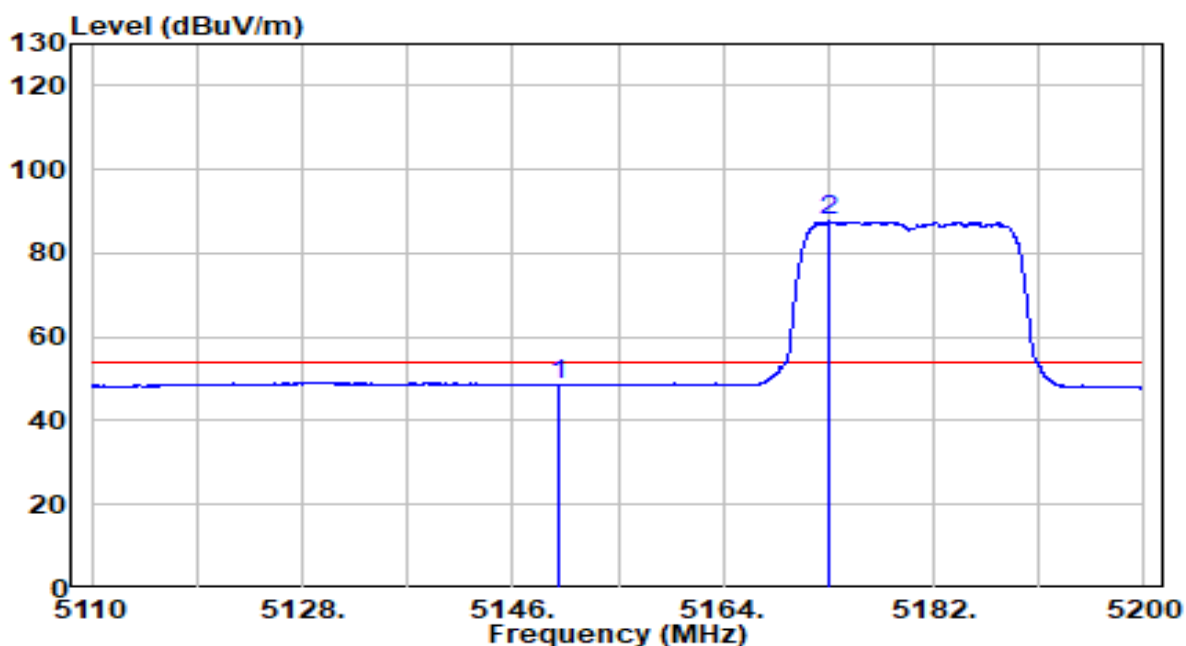


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.61	19.91	48.52	-5.48	54.00	Average
2	* 5173.090	67.66	19.93	87.59	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

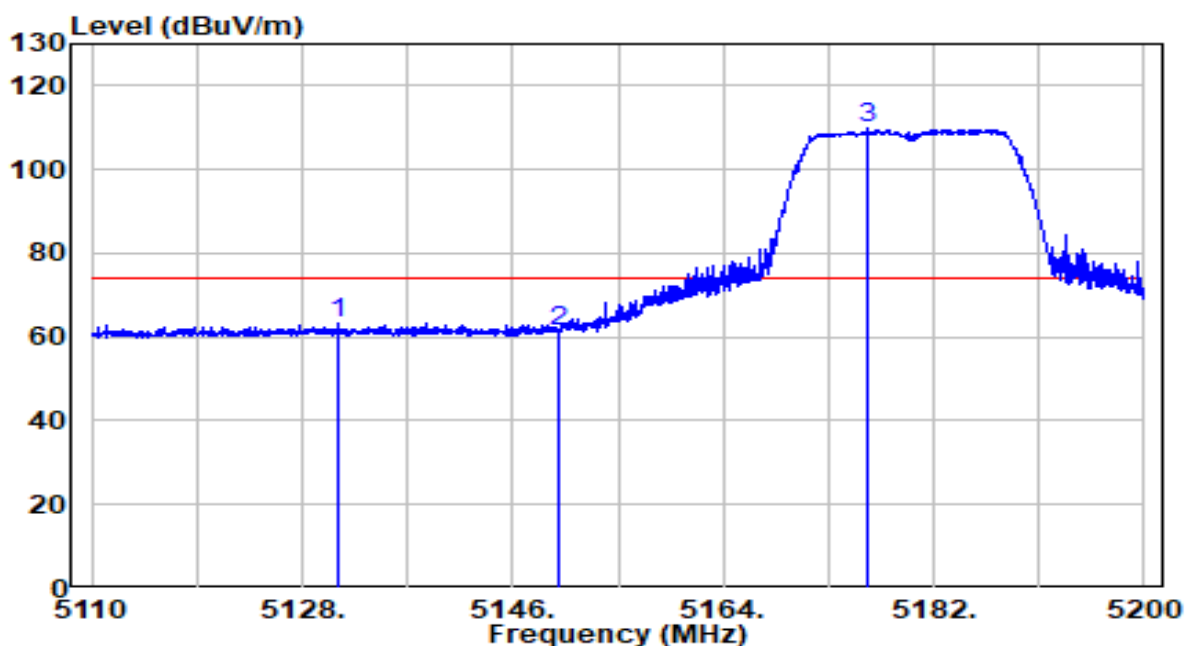


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5131.150	43.18	19.89	63.06	-10.94	74.00	Peak
2	5150.000	41.65	19.91	61.56	-12.44	74.00	Peak
3	* 5176.285	89.89	19.93	109.82	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

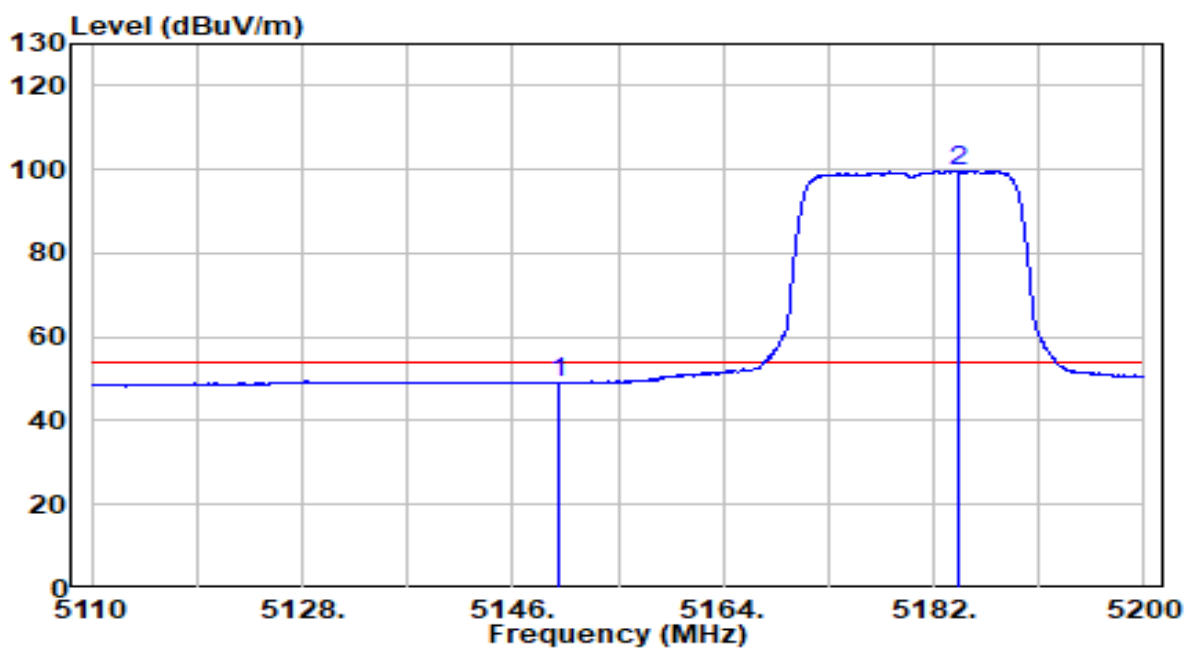


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.23	19.91	49.14	-4.86	54.00	Average
2	* 5184.025	79.76	19.94	99.71	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

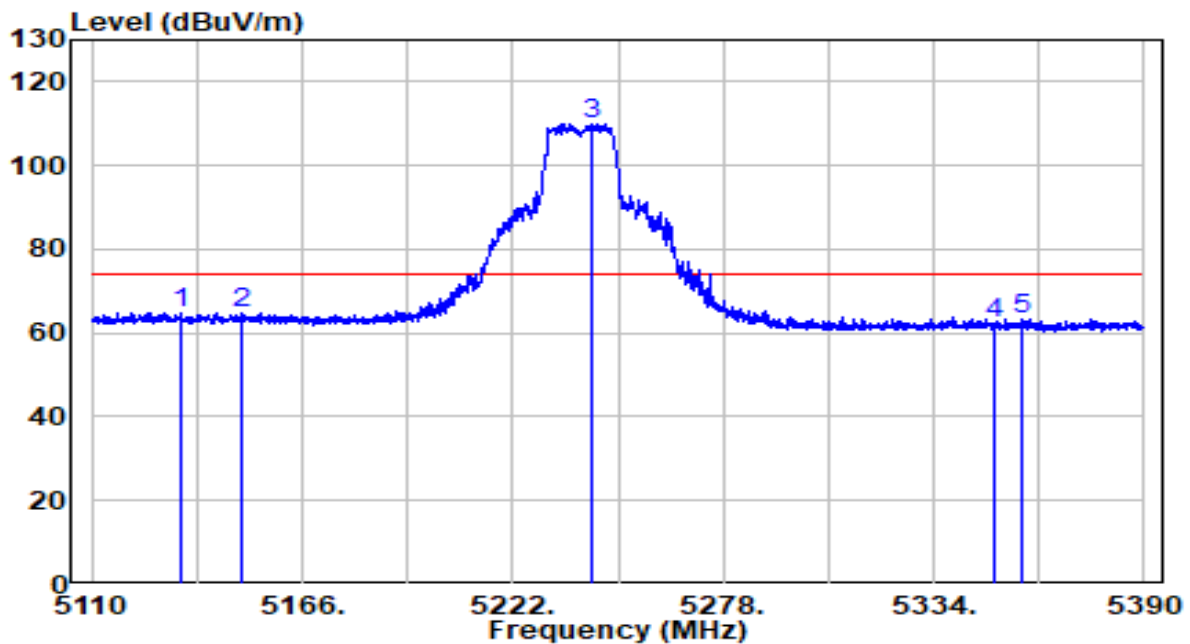


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5133.660	44.94	19.89	64.83	-9.17	74.00	Peak
2	5150.000	44.61	19.91	64.52	-9.48	74.00	Peak
3	* 5243.140	90.07	20.00	110.07	N/A	N/A	Peak
4	5350.000	42.05	20.11	62.16	-11.84	74.00	Peak
5	5357.800	43.35	20.12	63.47	-10.53	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

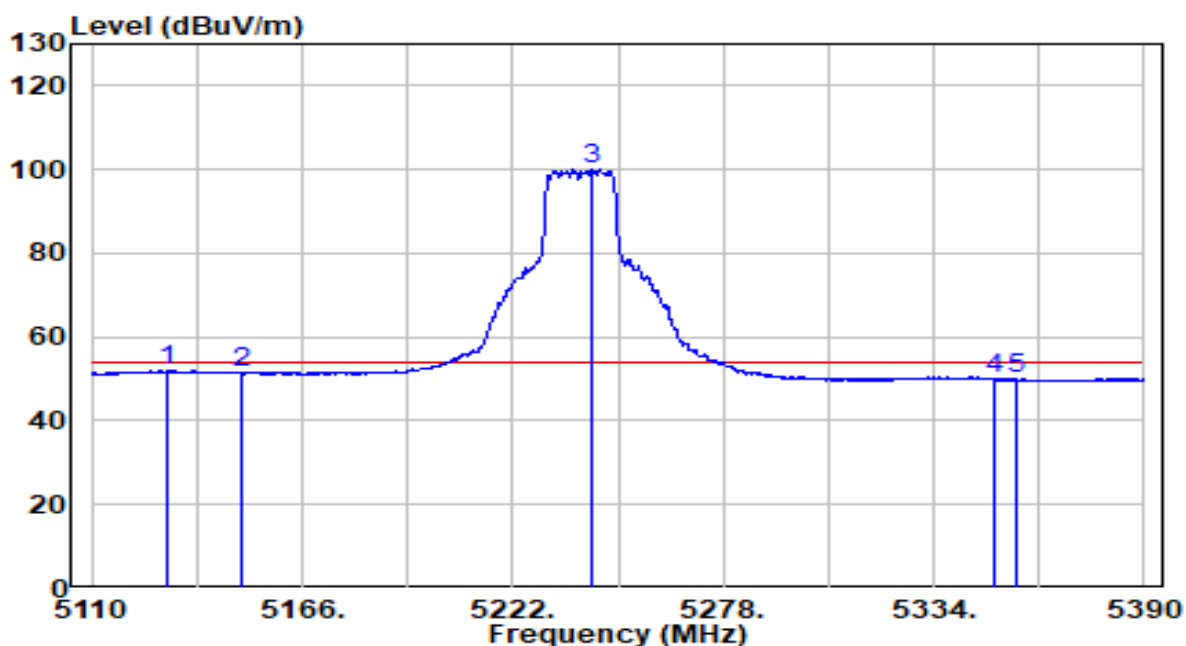


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5130.160	32.02	19.89	51.91	-2.09	54.00	Average
2	5150.000	31.47	19.91	51.38	-2.62	54.00	Average
3	* 5243.000	80.28	20.00	100.28	N/A	N/A	Average
4	5350.000	29.85	20.11	49.96	-4.04	54.00	Average
5	5355.840	29.91	20.12	50.03	-3.97	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

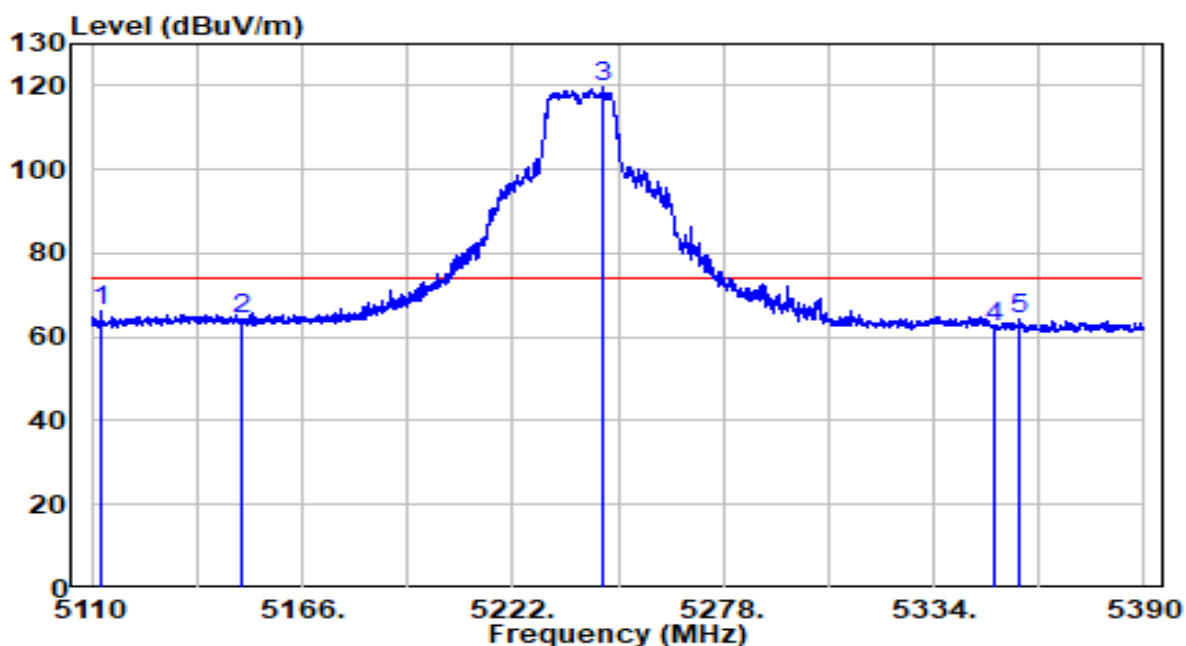


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5112.520	46.22	19.87	66.08	-7.92	74.00	Peak
2	5150.000	44.16	19.91	64.06	-9.94	74.00	Peak
3	* 5246.080	99.81	20.01	119.81	N/A	N/A	Peak
4	5350.000	42.07	20.11	62.18	-11.82	74.00	Peak
5	5356.540	43.92	20.12	64.04	-9.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

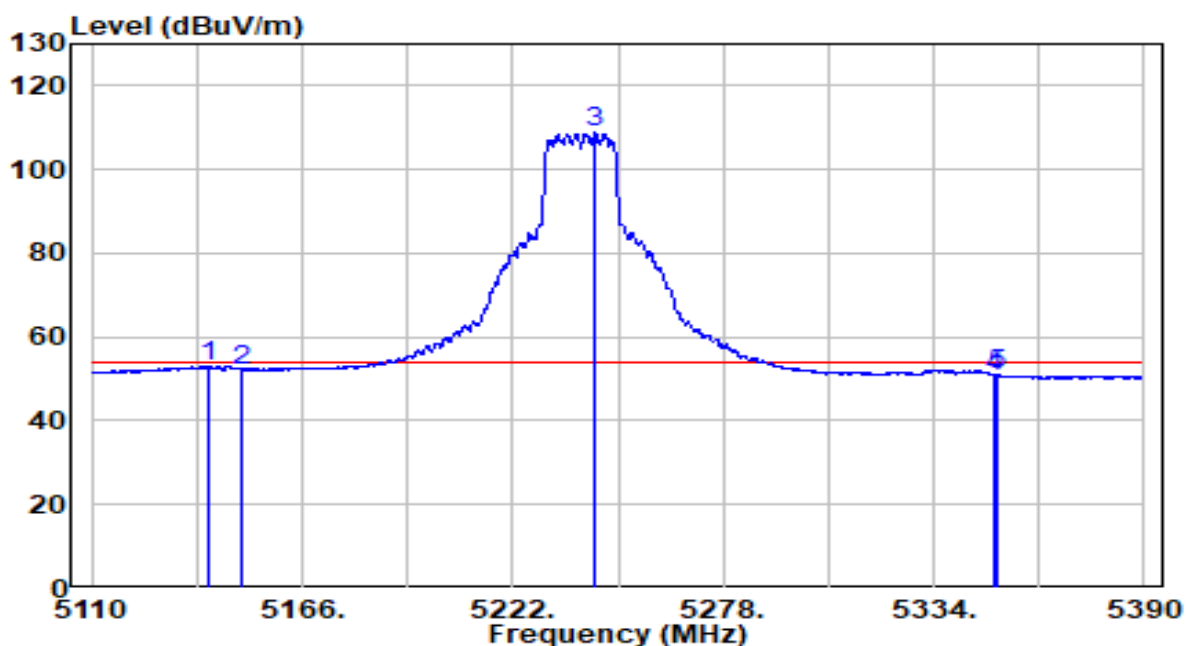


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5141.220	33.07	19.90	52.96	-1.04	54.00	Average
2	5150.000	32.33	19.91	52.23	-1.77	54.00	Average
3	* 5243.840	88.66	20.00	108.67	N/A	N/A	Average
4	5350.000	30.57	20.11	50.69	-3.31	54.00	Average
5	5350.940	30.79	20.11	50.90	-3.10	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

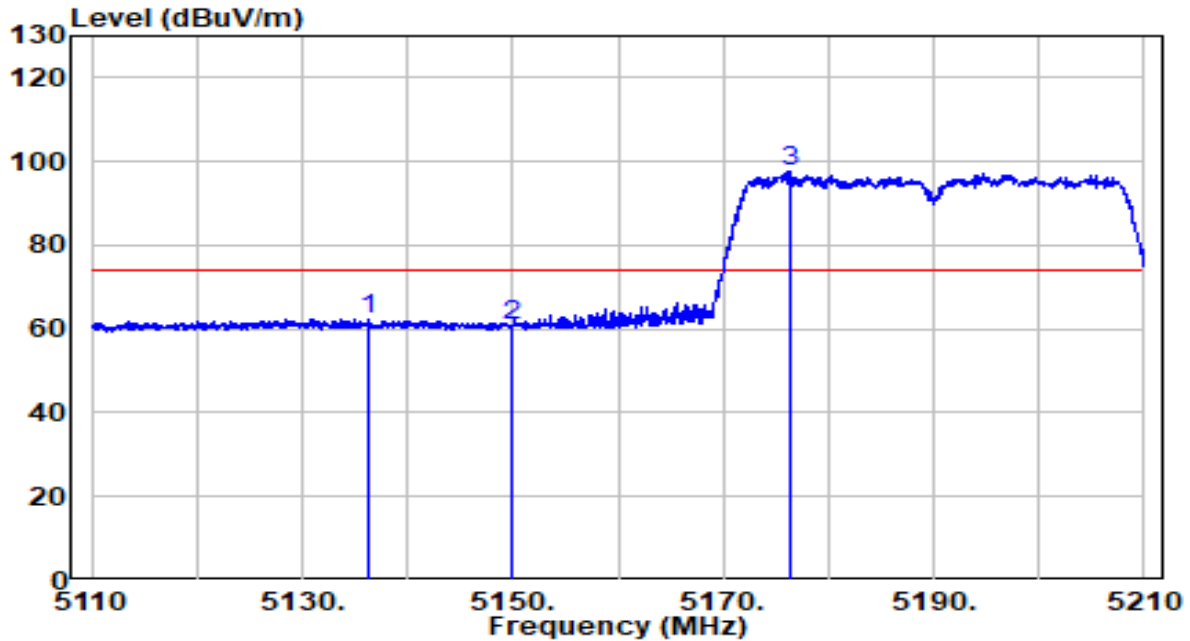


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5136.400	42.40	19.89	62.29	-11.71	74.00	Peak
2	5150.000	40.97	19.91	60.87	-13.13	74.00	Peak
3	* 5176.400	77.60	19.93	97.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

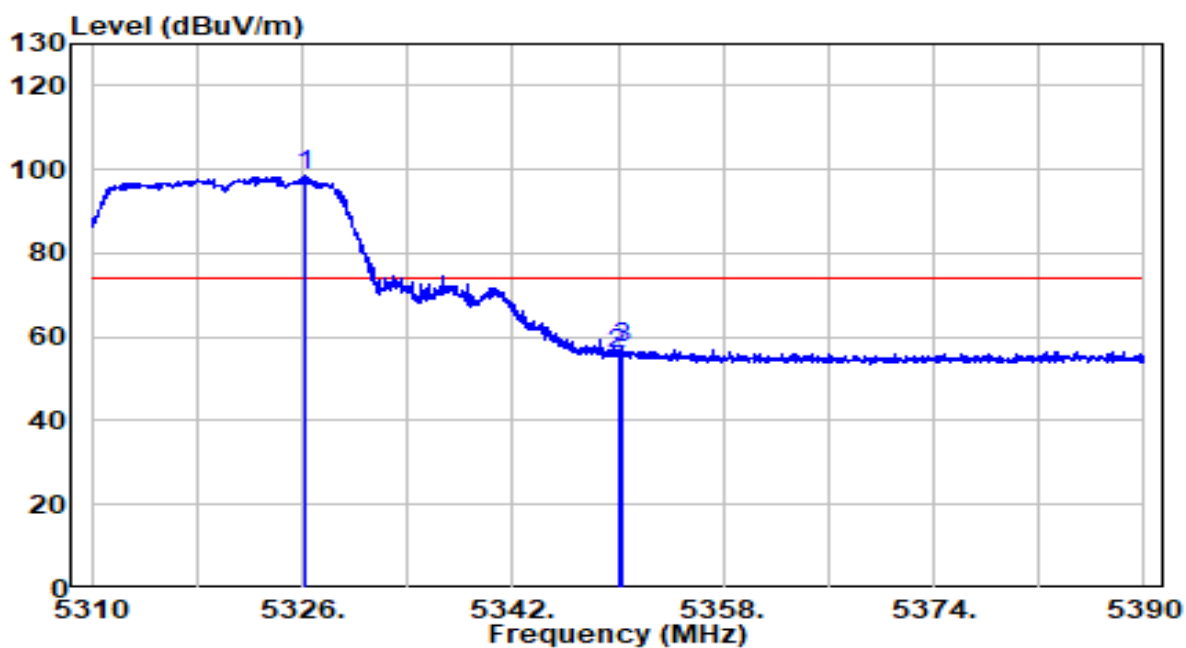


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5326.240	78.43	20.09	98.52	N/A	N/A	Peak
2		5350.000	35.82	20.11	55.94	-18.06	74.00	Peak
3		5350.240	37.35	20.11	57.46	-16.54	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

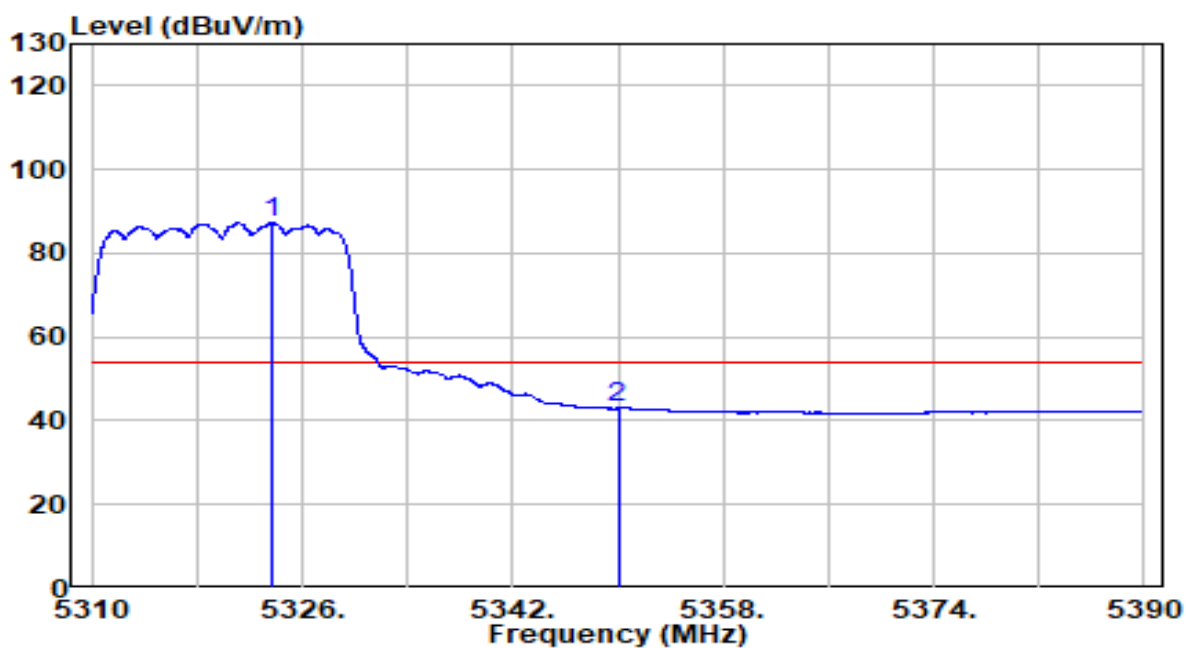


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5323.640	67.19	20.09	87.28	N/A	N/A	Average
2	5350.000	22.85	20.11	42.97	-11.03	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

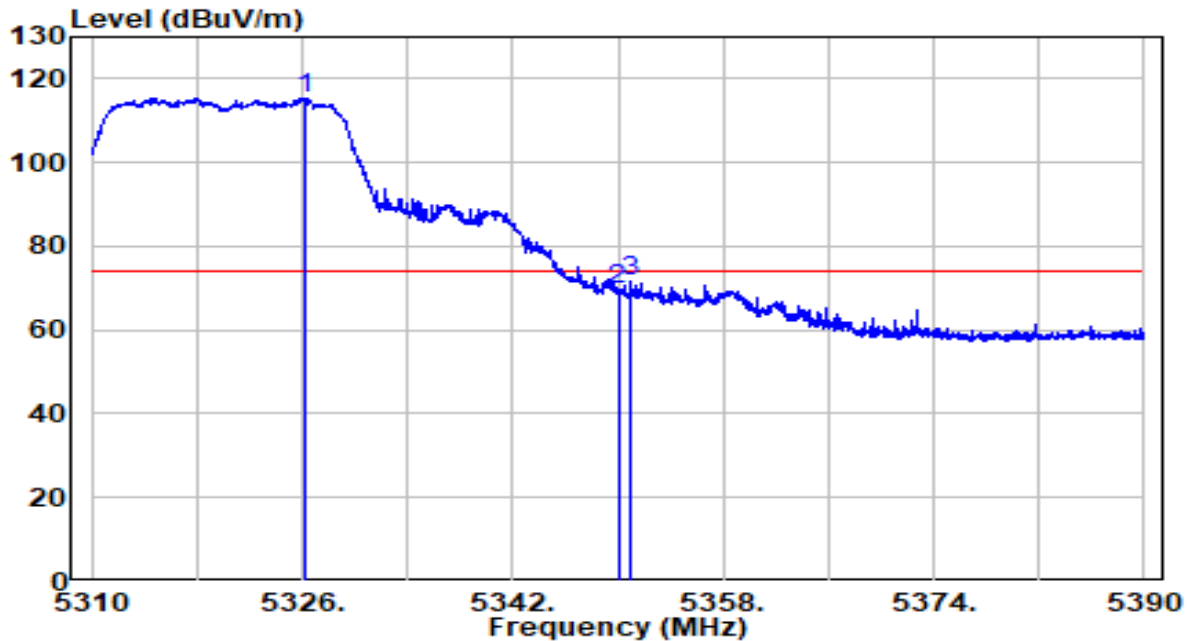


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5326.240	95.33	20.09	115.42	N/A	N/A	Peak
2		5350.000	49.36	20.11	69.47	-4.53	74.00	Peak
3		5350.880	51.46	20.11	71.57	-2.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

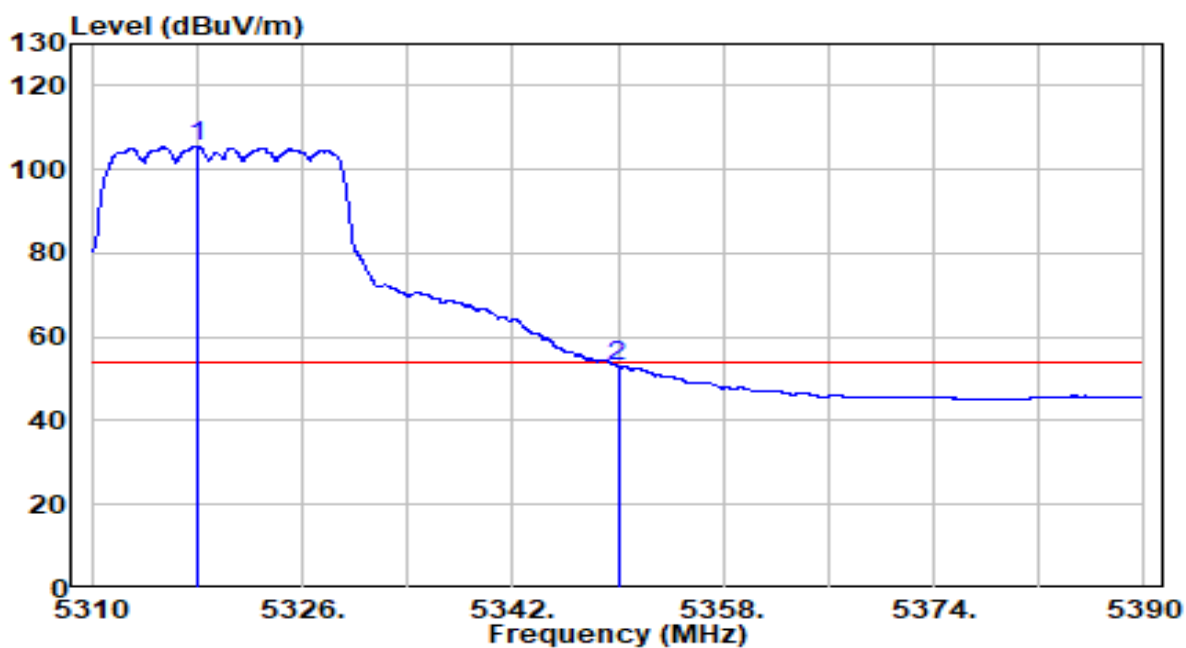


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5317.960	85.49	20.08	105.57	N/A	N/A	Average
2		5350.000	32.96	20.11	53.08	-0.92	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

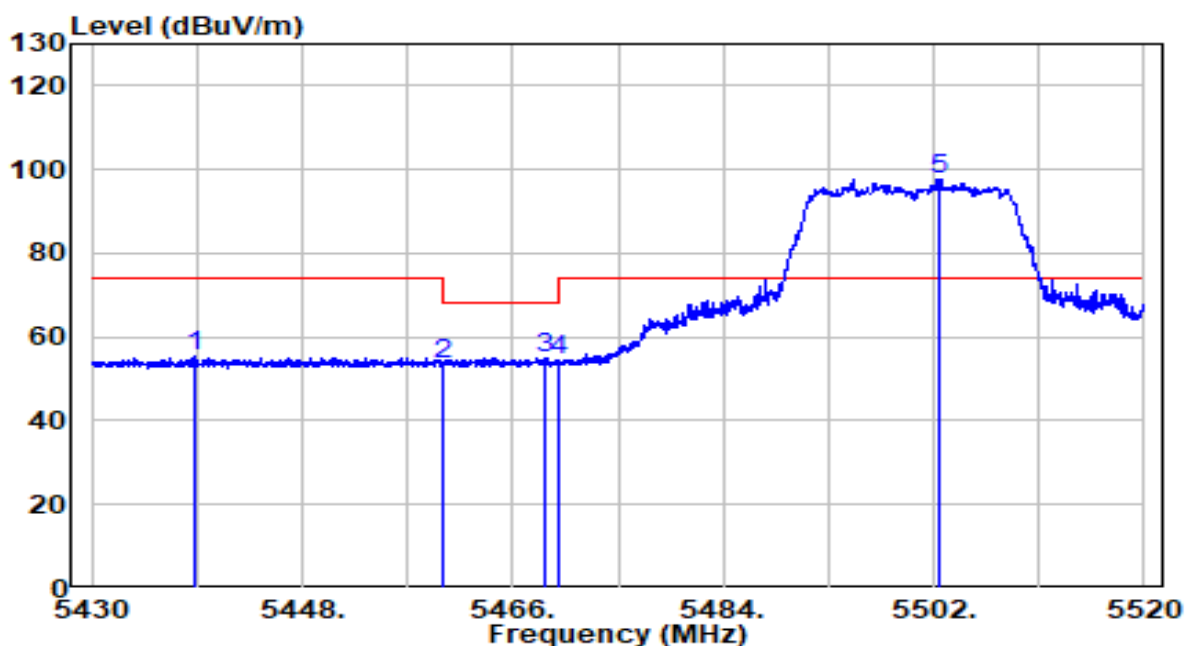


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5438.730	34.99	20.21	55.20	-18.80	74.00	Peak
2	5460.000	33.33	20.23	53.56	-14.64	68.20	Peak
3	5468.655	34.95	20.24	55.19	-13.01	68.20	Peak
4	5470.000	34.32	20.24	54.56	-13.64	68.20	Peak
5	* 5502.540	77.36	20.28	97.64	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

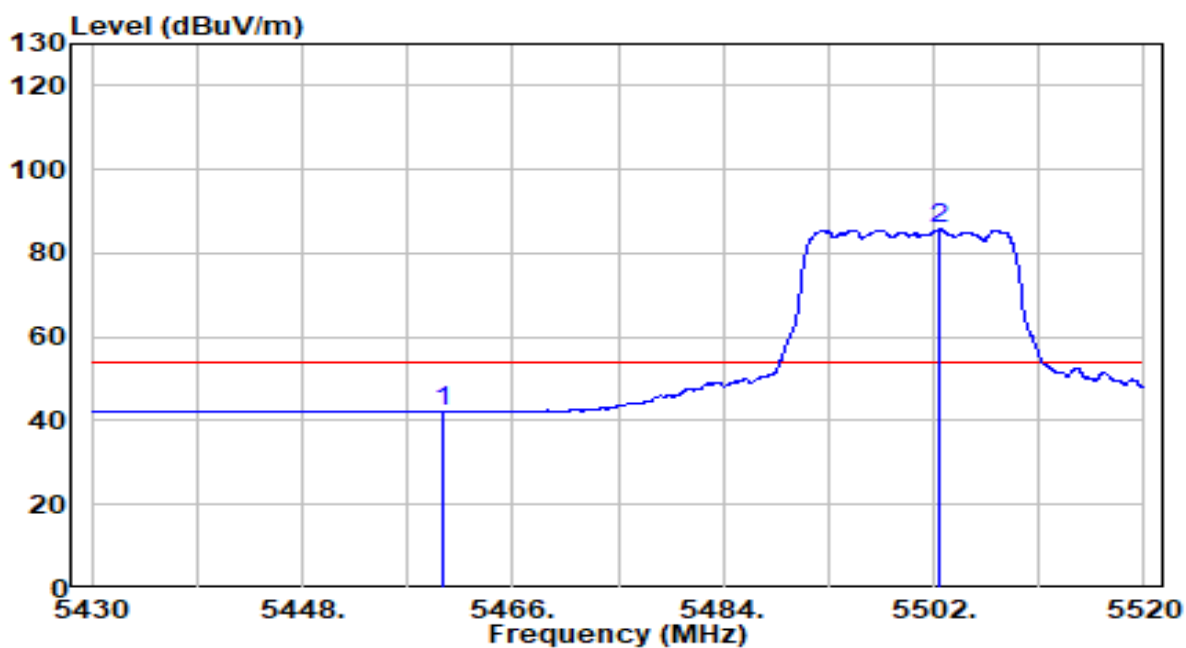


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	21.87	20.23	42.10	-11.90	54.00	Average
2	* 5502.540	65.51	20.28	85.79	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500 MHz - CDD Mode	Test Voltage	110V/60Hz

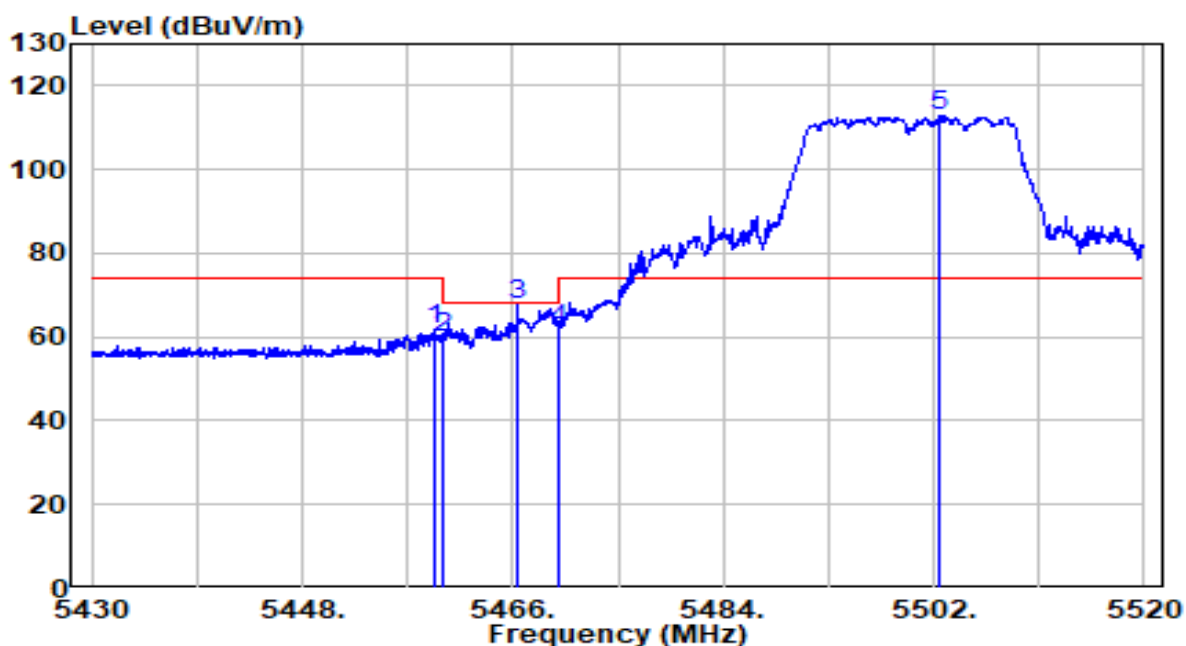


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.250	41.45	20.23	61.68	-12.32	74.00	Peak
2	5460.000	39.50	20.23	59.73	-8.47	68.20	Peak
3	5466.360	47.37	20.24	67.61	-0.59	68.20	Peak
4	5470.000	41.72	20.24	61.96	-6.24	68.20	Peak
5	* 5502.540	92.60	20.28	112.87	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

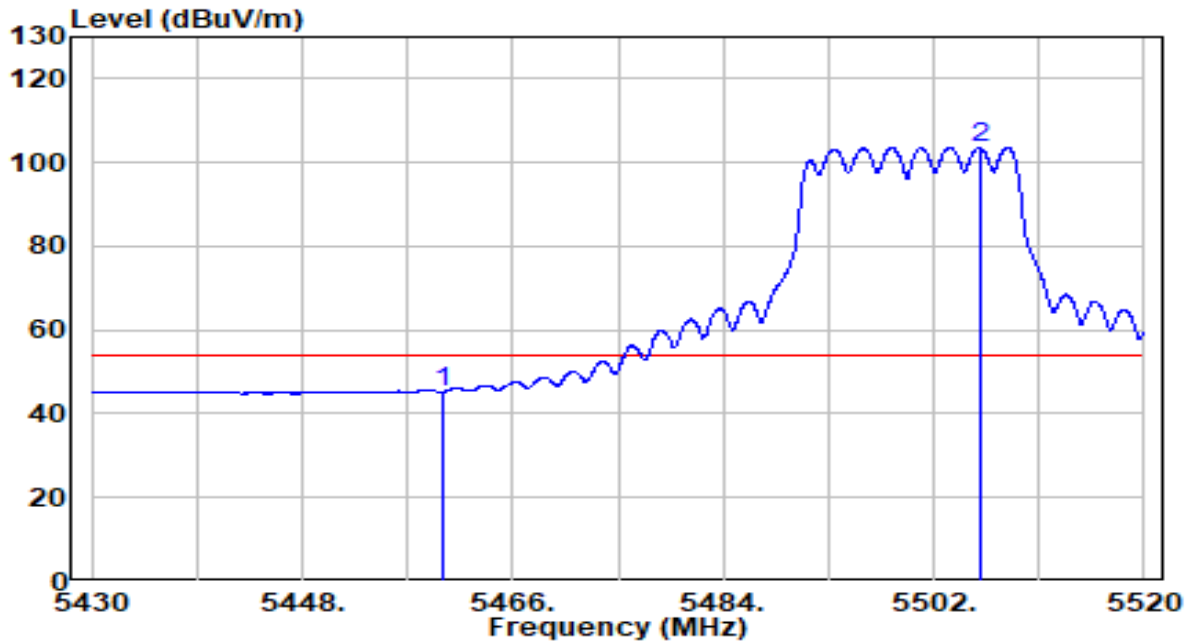


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	25.08	20.23	45.31	-8.69	54.00	Average
2	* 5505.960	83.24	20.29	103.52	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

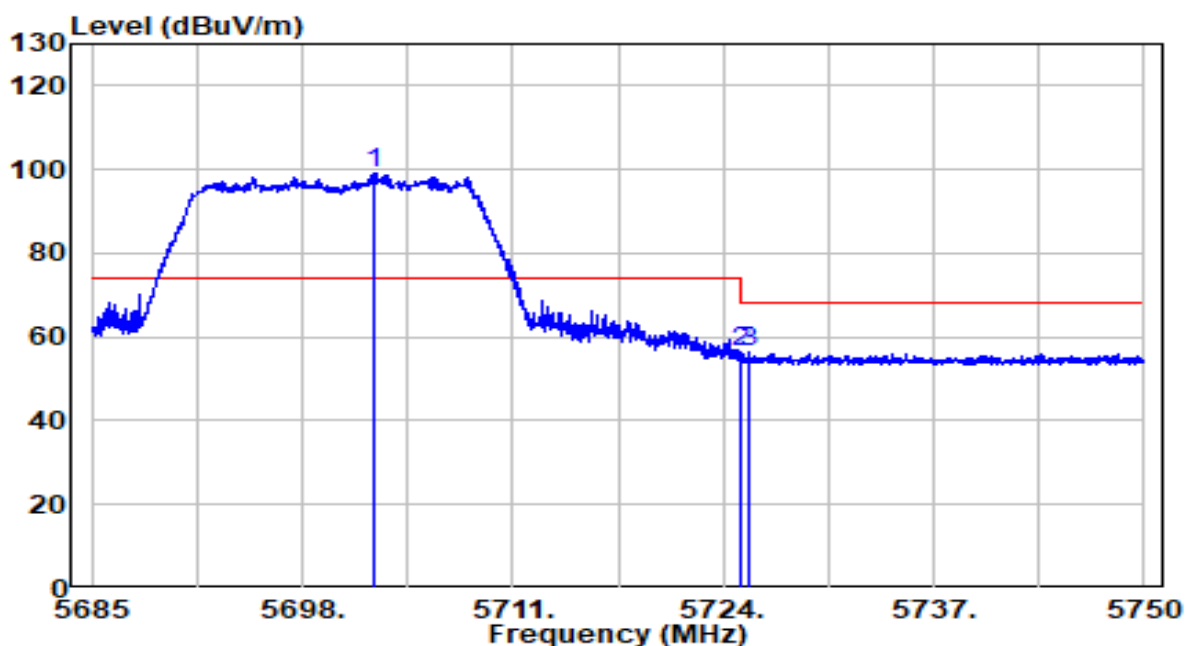


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5702.453	78.28	20.93	99.20	N/A	N/A	Peak
2		5725.000	35.48	21.00	56.48	-11.72	68.20	Peak
3		5725.625	35.57	21.00	56.57	-11.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

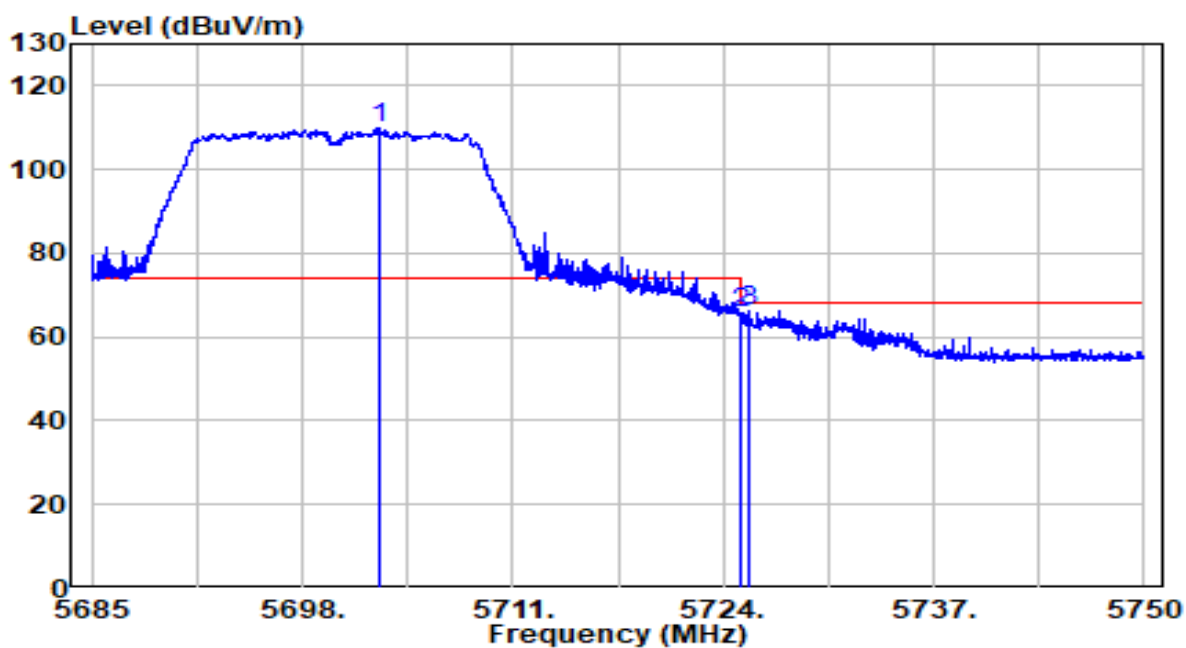


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5702.712	88.77	20.93	109.70	N/A	N/A	Peak
2		5725.000	44.96	21.00	65.96	-2.24	68.20	Peak
3		5725.527	45.37	21.00	66.38	-1.82	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

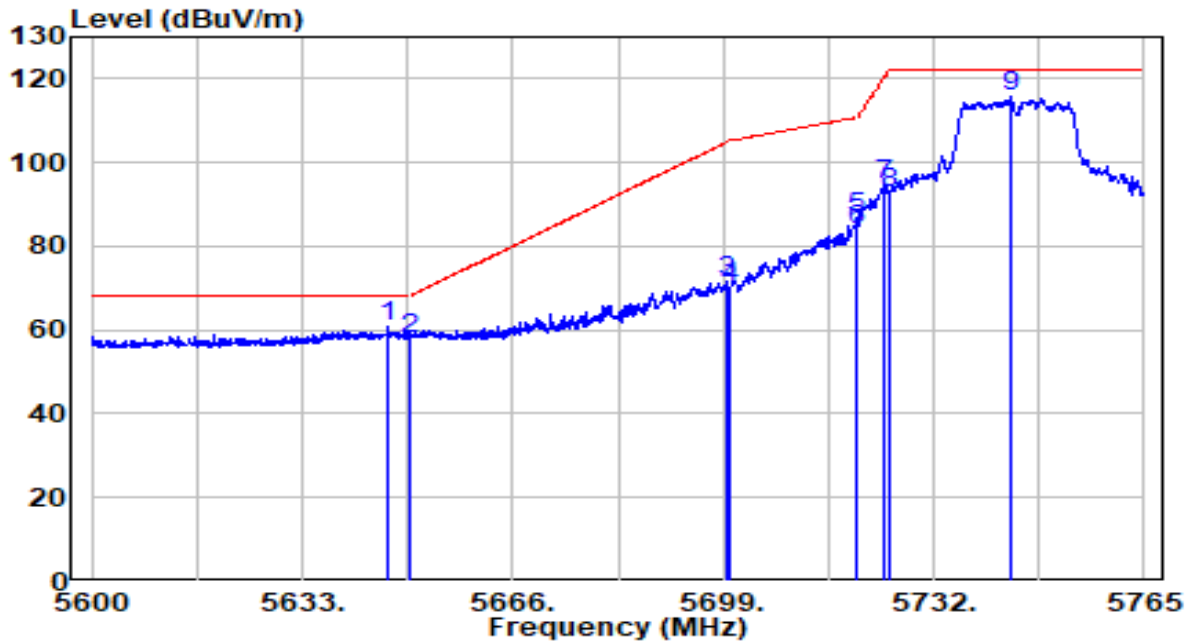


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5646.612	40.02	20.75	60.76	-7.44	68.20	Peak
2	5650.000	37.11	20.76	57.87	-10.33	68.20	Peak
3	5699.743	50.83	20.92	71.75	-33.26	105.01	Peak
4	5700.000	49.11	20.92	70.03	-35.17	105.20	Peak
5	5719.790	65.63	20.98	86.61	-24.13	110.74	Peak
6	5720.000	63.06	20.98	84.04	-26.76	110.80	Peak
7	5724.245	73.92	21.00	94.92	-25.56	120.48	Peak
8	5725.000	71.58	21.00	92.57	-29.63	122.20	Peak
9 *	5743.962	94.68	21.06	115.74	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

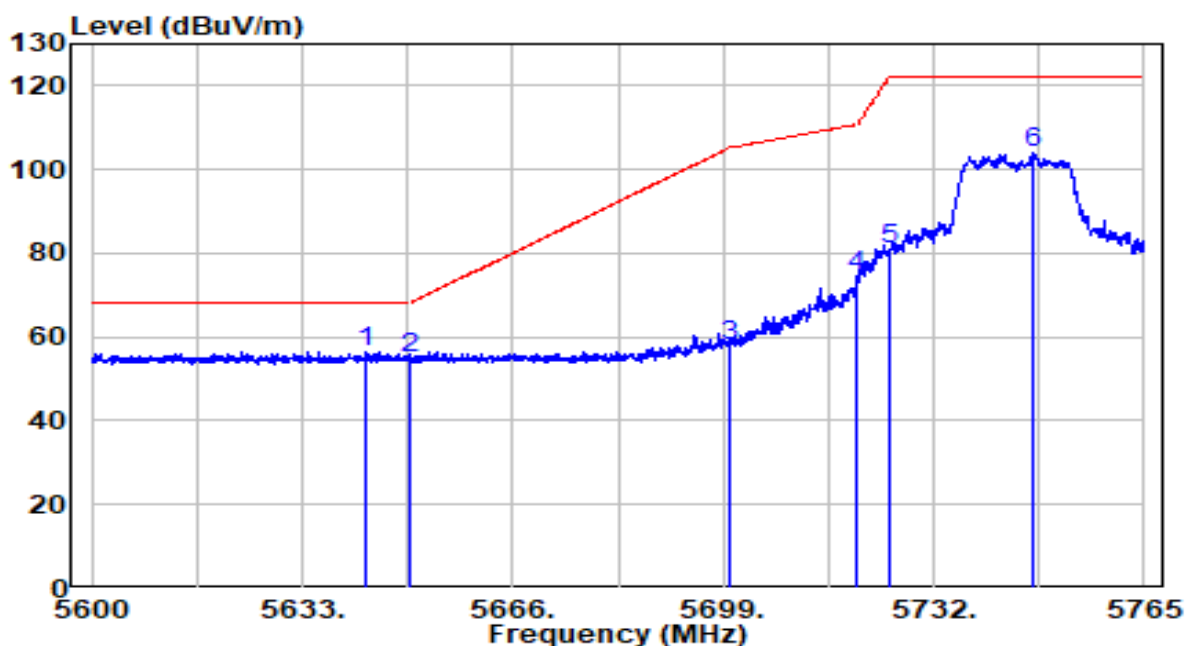


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5642.982	35.76	20.73	56.50	-11.70	68.20	Peak
2		5650.000	33.98	20.76	54.74	-13.46	68.20	Peak
3		5700.000	37.05	20.92	57.97	-47.23	105.20	Peak
4		5720.000	53.72	20.98	74.70	-36.10	110.80	Peak
5		5725.000	59.87	21.00	80.87	-41.33	122.20	Peak
6		5747.510	82.87	21.07	103.94	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

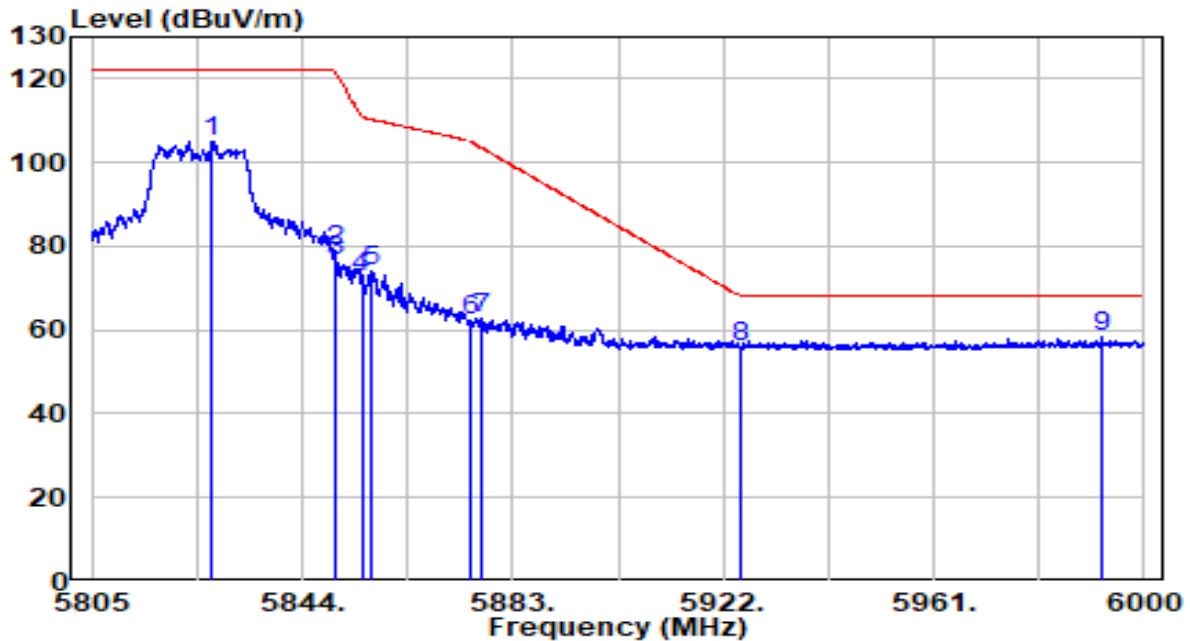


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5827.328	83.60	21.33	104.93	N/A	N/A	Peak
2	5849.947	57.77	21.40	79.18	-43.02	122.20	Peak
3	5850.000	54.99	21.40	76.39	-45.81	122.20	Peak
4	5855.000	51.10	21.42	72.52	-38.28	110.80	Peak
5	5856.772	52.41	21.43	73.83	-36.47	110.30	Peak
6	5875.000	41.03	21.49	62.52	-42.68	105.20	Peak
7	5877.442	41.44	21.49	62.93	-40.45	103.39	Peak
8	5925.000	34.48	21.65	56.12	-12.08	68.20	Peak
9	* 5992.200	36.28	21.86	58.14	-10.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

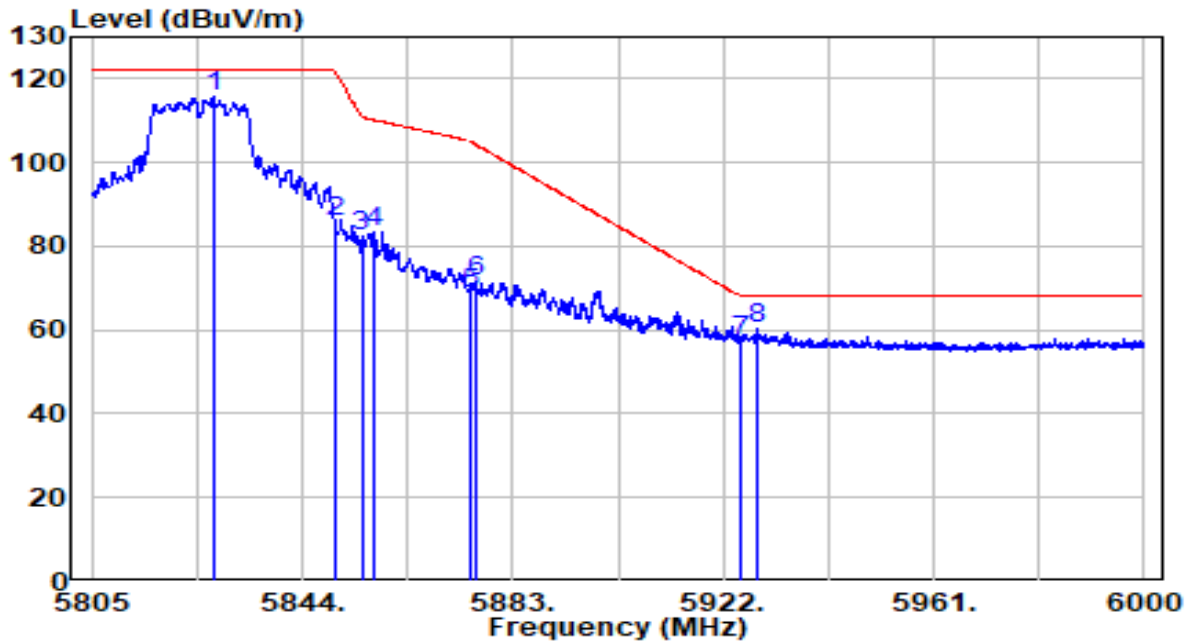


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5827.522	94.21	21.33	115.54	N/A	N/A	Peak
2		5850.000	64.63	21.40	86.03	-36.17	122.20	Peak
3		5855.000	61.03	21.42	82.45	-28.35	110.80	Peak
4		5857.455	61.94	21.43	83.37	-26.74	110.11	Peak
5		5875.000	47.26	21.49	68.75	-36.45	105.20	Peak
6		5875.980	50.02	21.49	71.51	-32.96	104.47	Peak
7		5925.000	35.76	21.65	57.41	-10.79	68.20	Peak
8		5928.337	38.78	21.66	60.44	-7.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

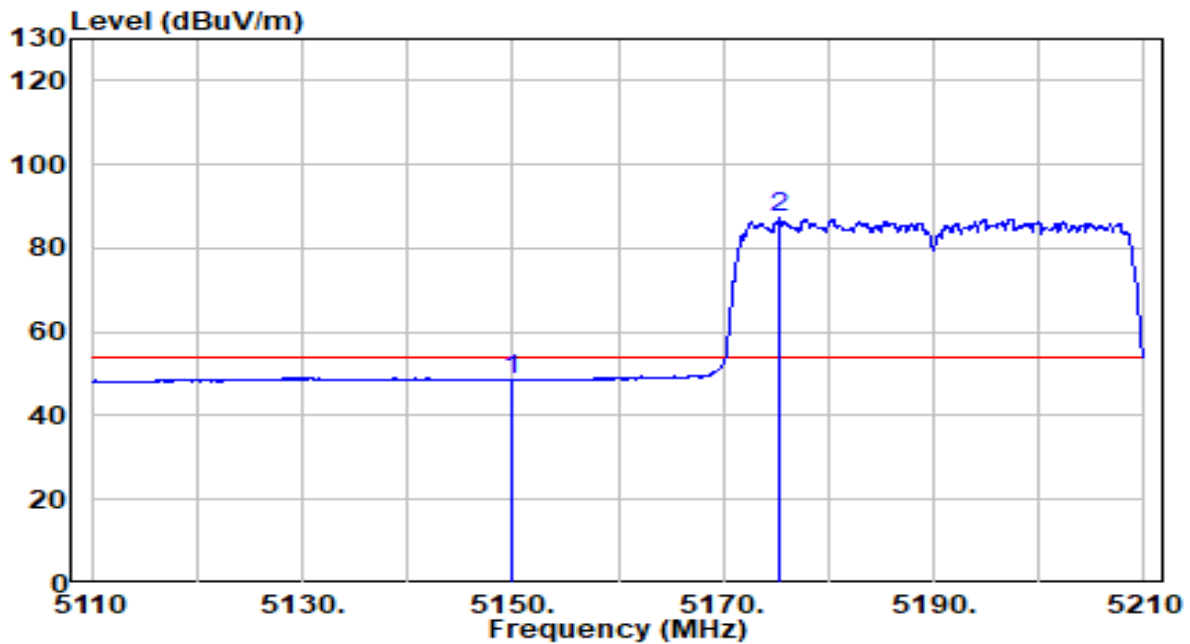


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.61	19.91	48.51	-5.49	54.00	Average
2	* 5175.350	67.15	19.93	87.08	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

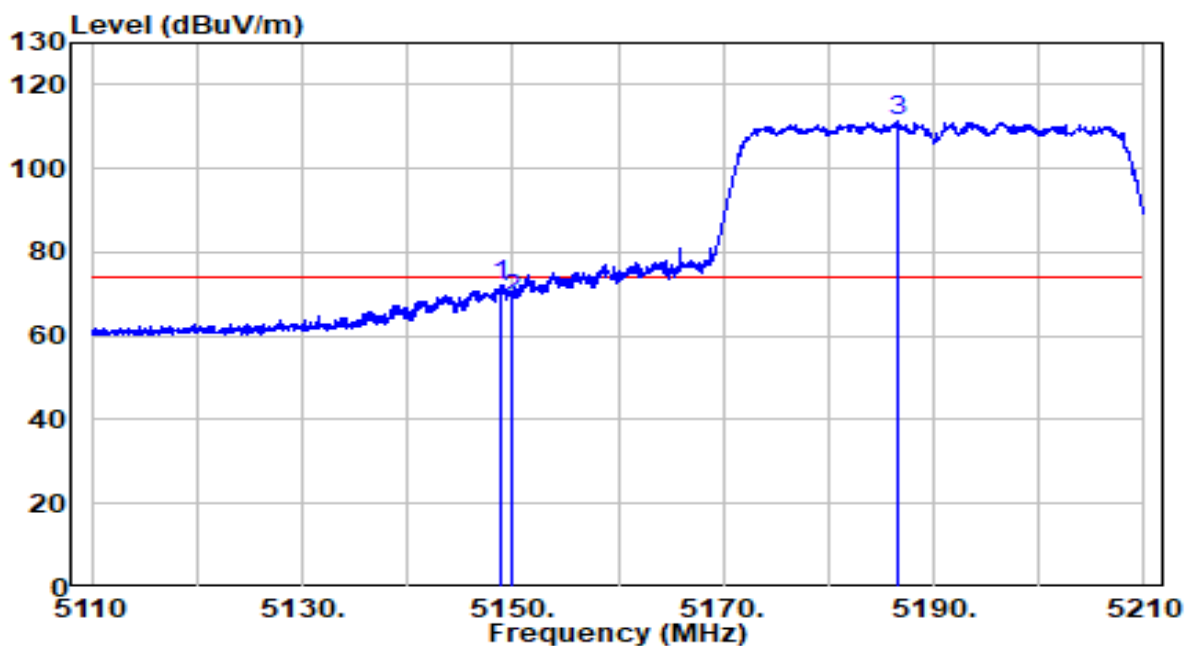


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.850	52.12	19.90	72.03	-1.97	74.00	Peak
2	5150.000	48.61	19.91	68.52	-5.48	74.00	Peak
3	* 5186.550	91.41	19.94	111.35	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-28
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

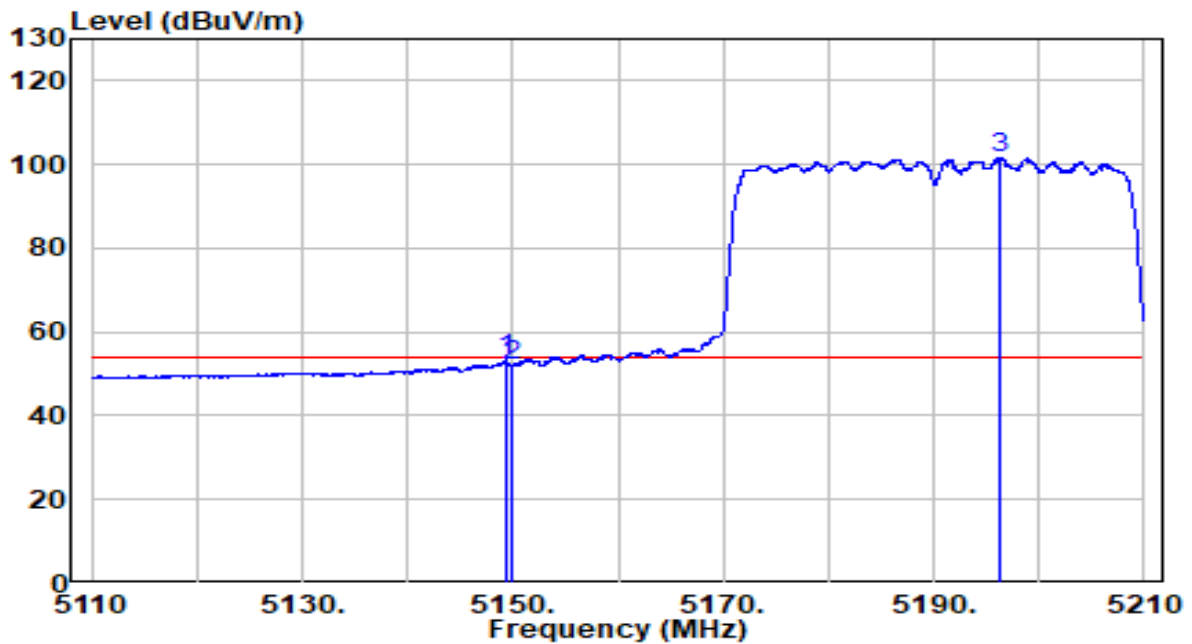


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.350	33.39	19.91	53.29	-0.71	54.00	Average
2	5150.000	32.26	19.91	52.16	-1.84	54.00	Average
3	* 5196.300	81.82	19.95	101.77	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

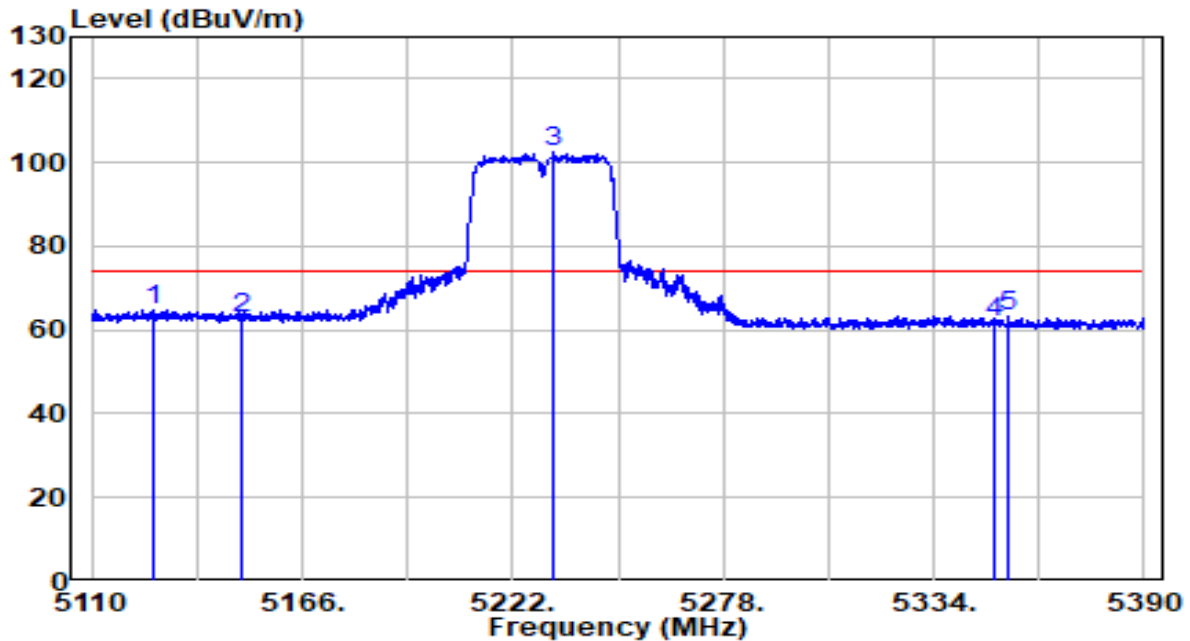


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5126.380	44.85	19.88	64.73	-9.27	74.00	Peak
2	5150.000	42.75	19.91	62.65	-11.35	74.00	Peak
3	* 5232.780	82.42	19.99	102.42	N/A	N/A	Peak
4	5350.000	41.76	20.11	61.87	-12.13	74.00	Peak
5	5353.880	43.17	20.12	63.29	-10.71	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

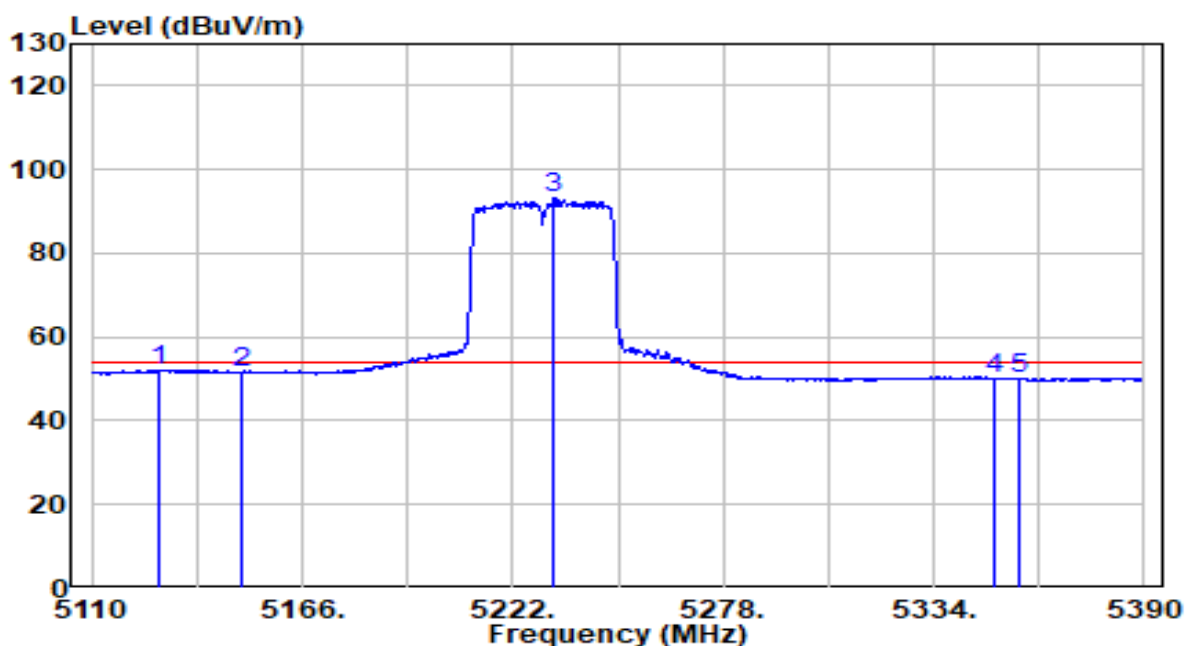


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5128.200	32.23	19.88	52.11	-1.89	54.00	Average
2	5150.000	31.68	19.91	51.59	-2.41	54.00	Average
3	* 5233.060	73.03	19.99	93.02	N/A	N/A	Average
4	5350.000	29.95	20.11	50.06	-3.94	54.00	Average
5	5356.540	30.10	20.12	50.22	-3.78	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

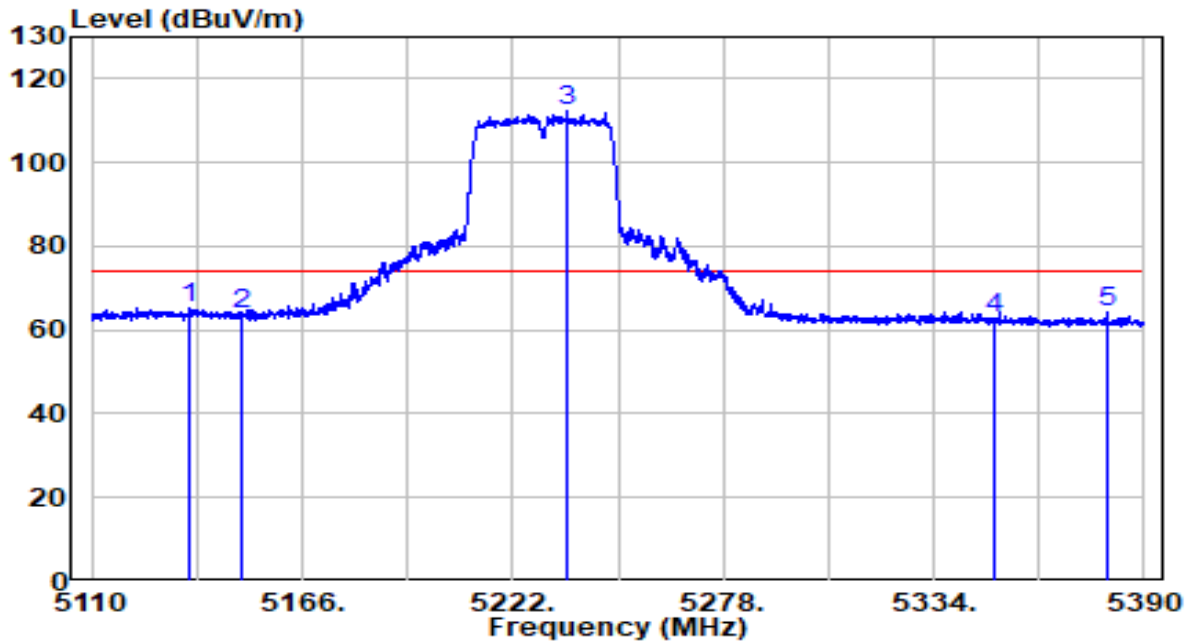


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5135.900	45.53	19.89	65.42	-8.58	74.00	Peak
2	5150.000	43.98	19.91	63.89	-10.11	74.00	Peak
3	* 5236.280	92.28	20.00	112.27	N/A	N/A	Peak
4	5350.000	42.45	20.11	62.56	-11.44	74.00	Peak
5	5379.920	44.01	20.15	64.16	-9.84	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

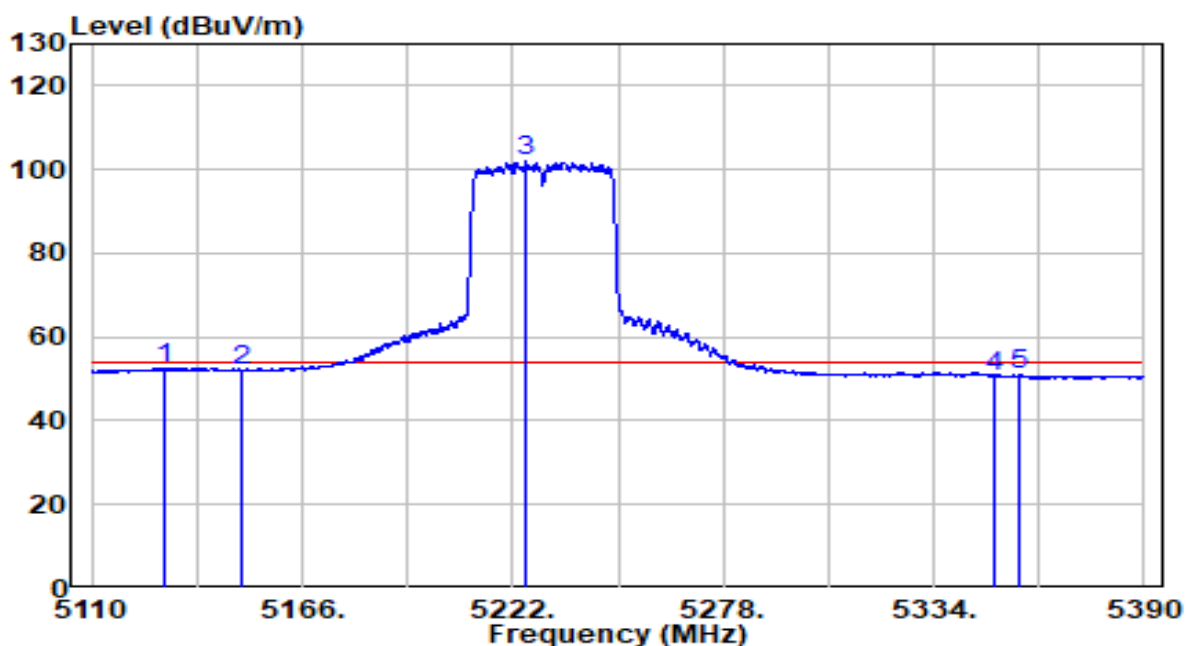


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5129.600	32.83	19.88	52.71	-1.29	54.00	Average
2	5150.000	32.15	19.91	52.05	-1.95	54.00	Average
3	* 5225.500	82.02	19.98	102.01	N/A	N/A	Average
4	5350.000	30.44	20.11	50.56	-3.44	54.00	Average
5	5356.680	30.91	20.12	51.03	-2.97	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

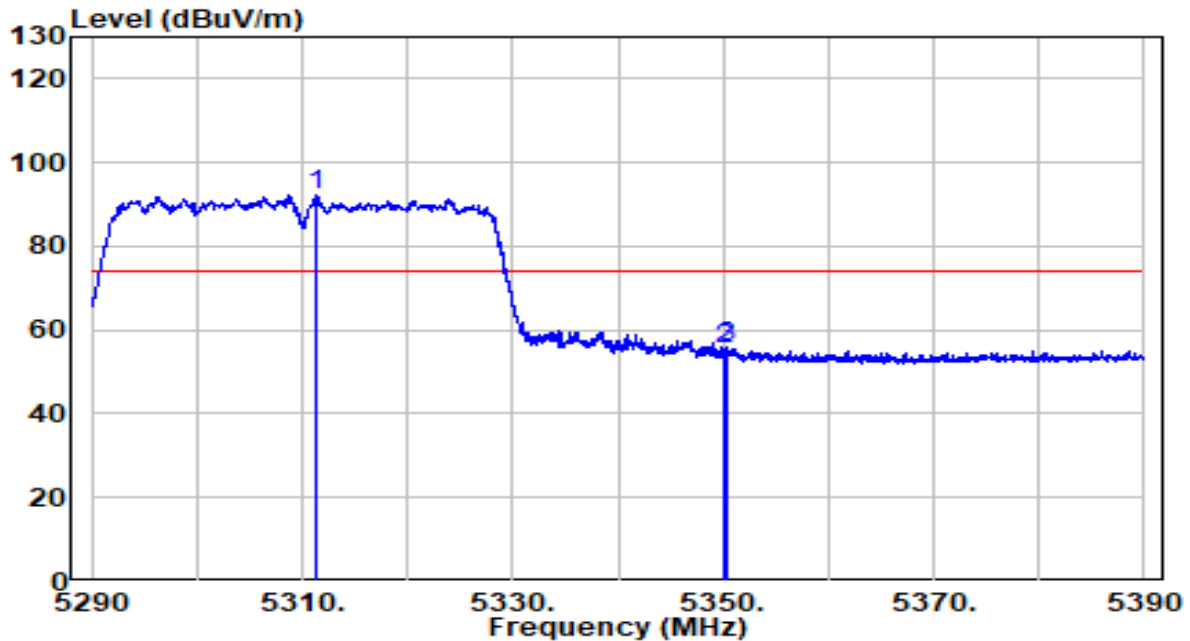


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5311.350	72.22	20.07	92.29	N/A	N/A	Peak
2		5350.000	35.15	20.11	55.27	-18.73	74.00	Peak
3		5350.250	35.64	20.11	55.75	-18.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

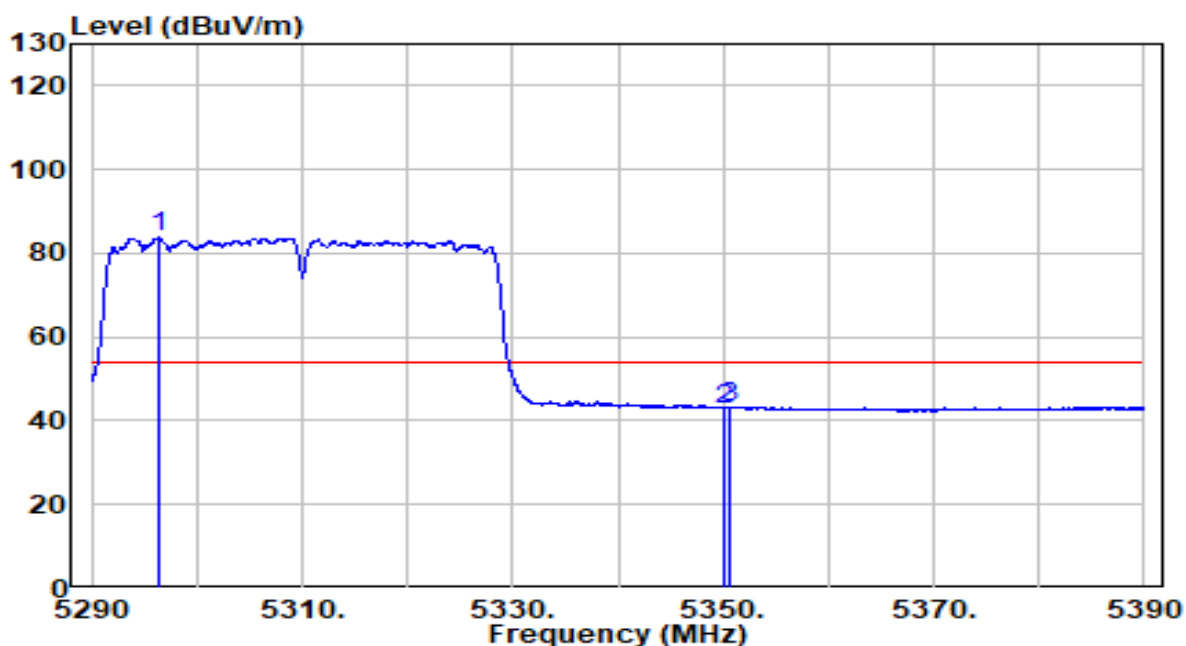


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5296.400	63.71	20.06	83.77	N/A	N/A	Average
2		5350.000	22.80	20.11	42.91	-11.09	54.00	Average
3		5350.650	23.18	20.11	43.29	-10.71	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

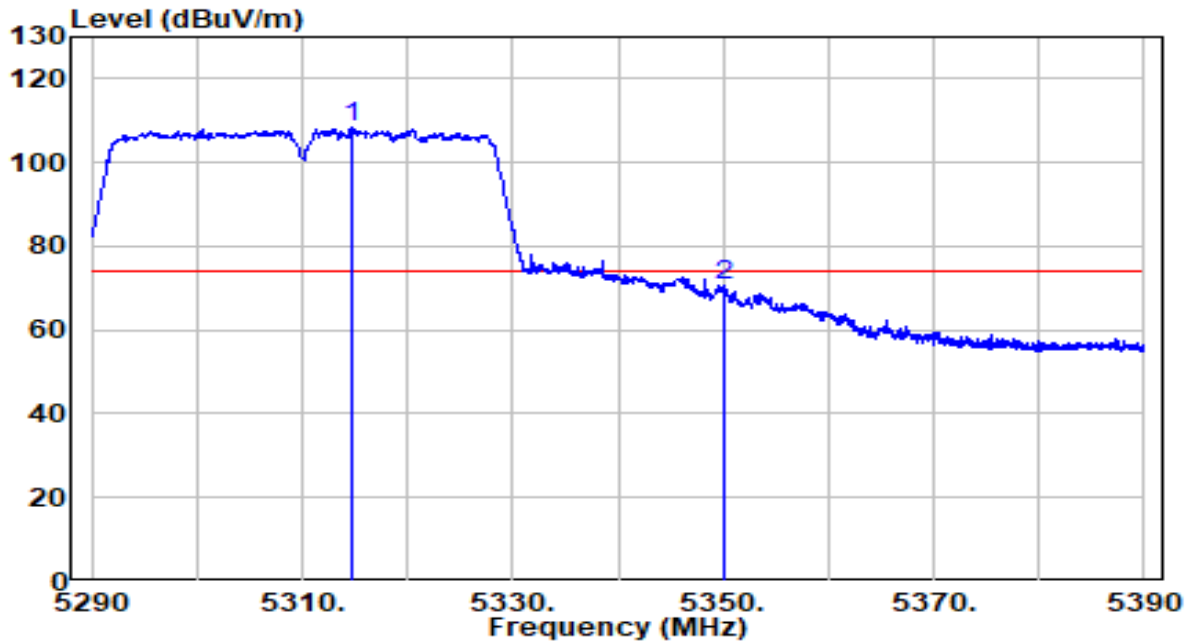


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5314.750	88.16	20.08	108.24	N/A	N/A	Peak
2		5350.000	50.61	20.11	70.72	-3.28	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

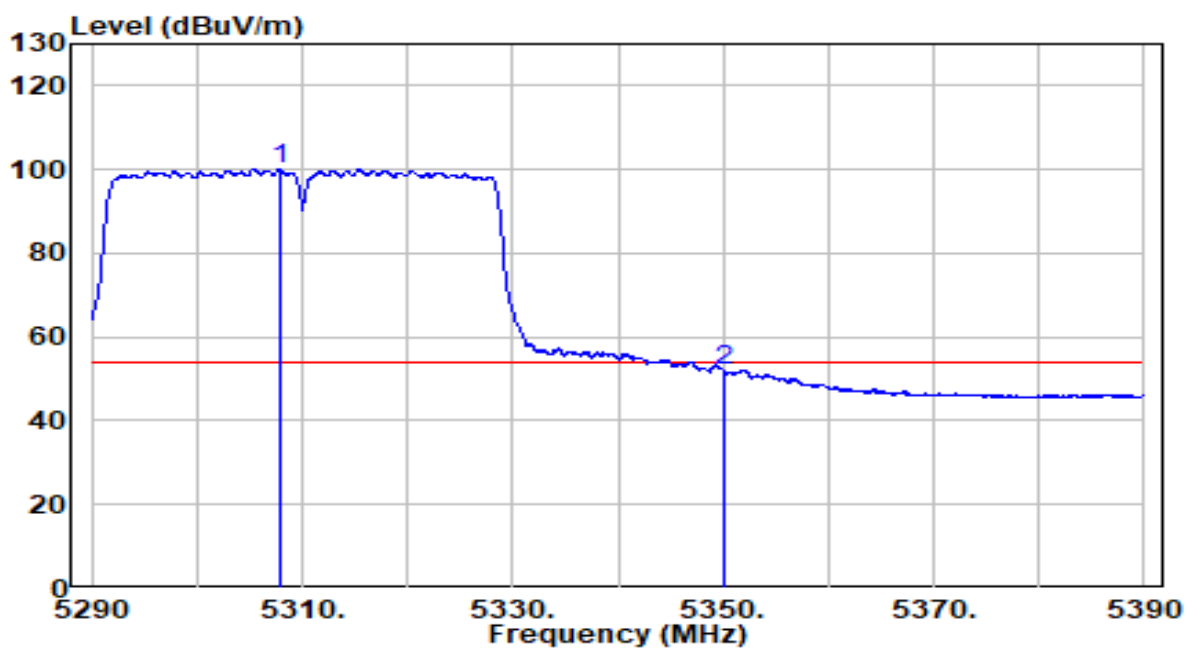


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5307.900	79.94	20.07	100.01	N/A	N/A	Average
2		5350.000	32.07	20.11	52.19	-1.81	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

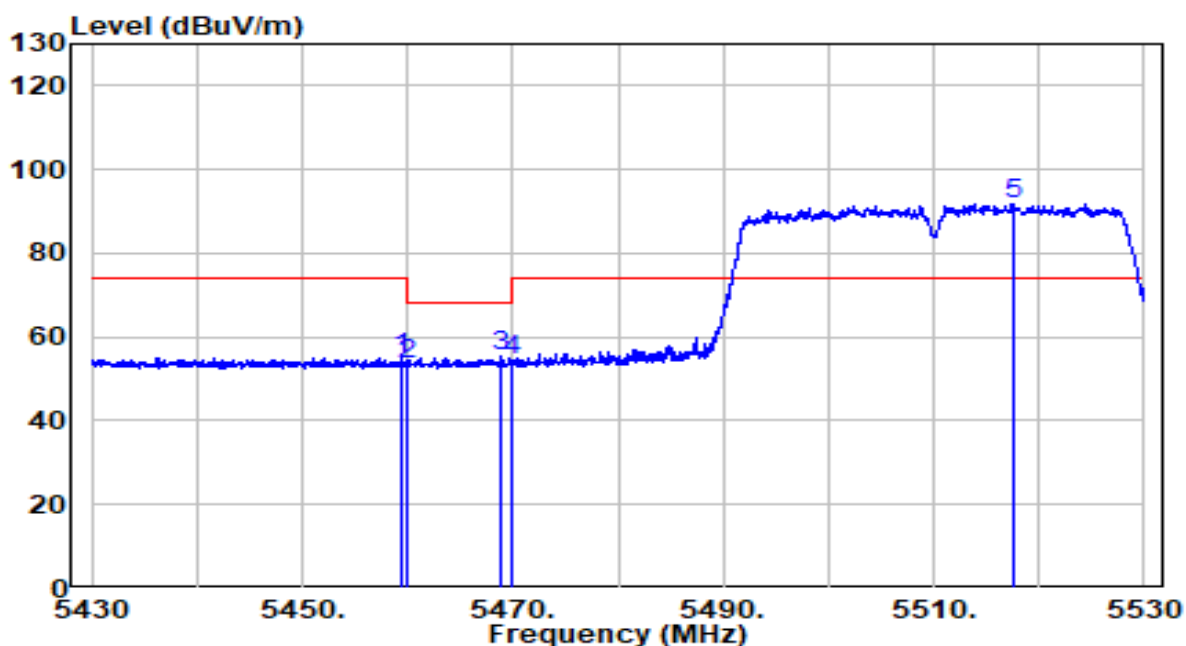


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.550	34.81	20.23	55.04	-18.96	74.00	Peak
2	5460.000	33.22	20.23	53.45	-14.75	68.20	Peak
3	5468.900	34.98	20.24	55.22	-12.98	68.20	Peak
4	5470.000	34.34	20.24	54.58	-13.62	68.20	Peak
5	* 5517.550	71.42	20.33	91.74	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

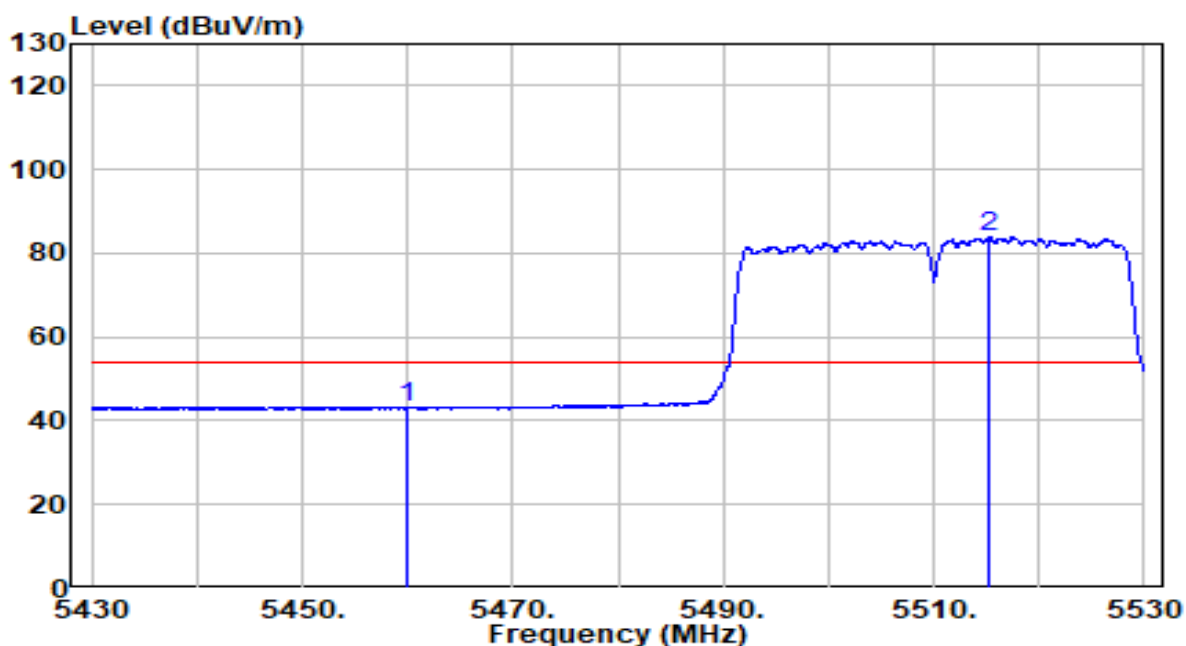


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	22.93	20.23	43.16	-10.84	54.00	Average
2	* 5515.300	63.57	20.32	83.89	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

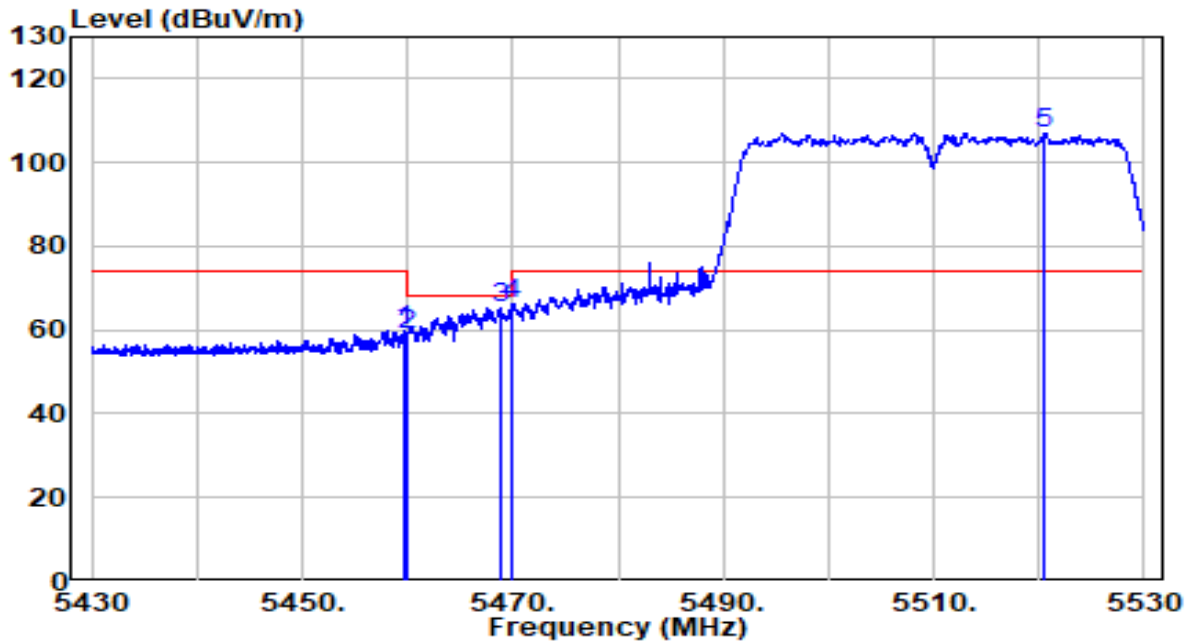


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.750	39.57	20.23	59.80	-14.20	74.00	Peak
2	5460.000	38.51	20.23	58.73	-9.47	68.20	Peak
3	5468.750	45.17	20.24	65.41	-2.79	68.20	Peak
4	5470.000	45.93	20.24	66.17	-2.03	68.20	Peak
5	* 5520.600	86.67	20.34	107.01	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	23.7°C/55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

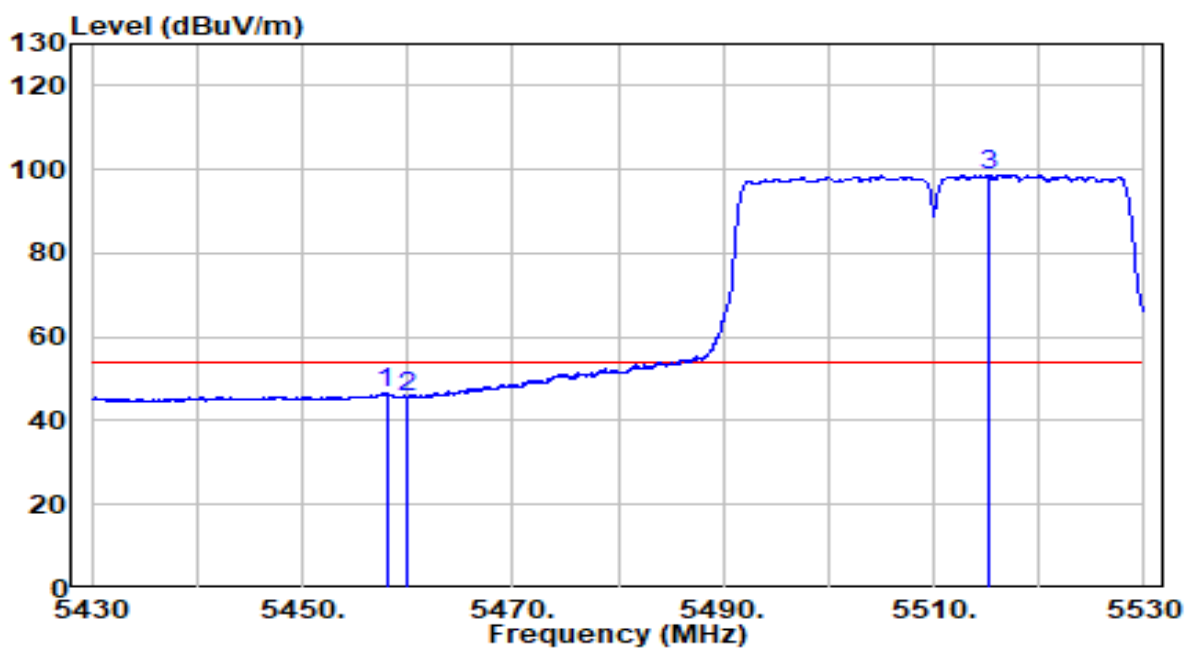

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.000	26.38	20.23	46.61	-7.39	54.00	Average
2	5460.000	25.54	20.23	45.77	-8.23	54.00	Average
3	* 5515.200	78.50	20.32	98.82	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.