


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 149 : 5745 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	113.7 PK			1.08 V	107	109.7	4.0
2	*5745.00	106.6 AV			1.08 V	107	102.6	4.0
3	11490.00	53.6 PK	74.0	-20.4	1.16 V	124	40.3	13.3
4	11490.00	43.8 AV	54.0	-10.2	1.16 V	124	30.5	13.3
5	#17235.00	48.0 PK	68.2	-20.2	1.80 V	55	30.4	17.6
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

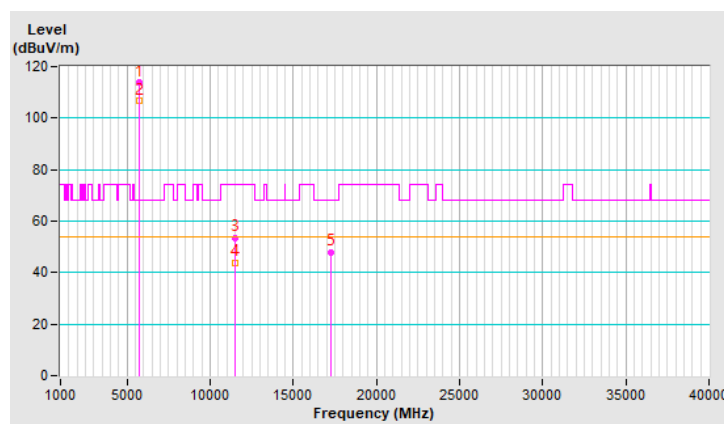


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 157 : 5785 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	103.9 PK			1.05 H	186	99.8	4.1
2	*5785.00	96.4 AV			1.05 H	186	92.3	4.1
3	11570.00	58.8 PK	74.0	-15.2	1.14 H	76	45.6	13.2
4	11570.00	47.5 AV	54.0	-6.5	1.14 H	76	34.3	13.2
5	#17355.00	46.0 PK	68.2	-22.2	1.38 H	122	28.4	17.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

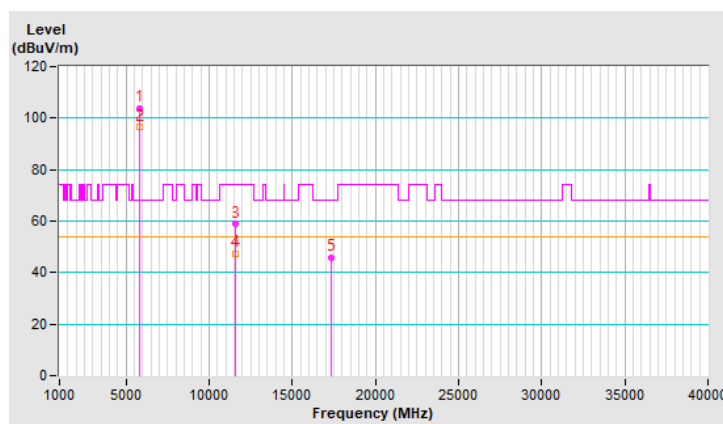


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 157 : 5785 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	114.0 PK			1.10 V	98	109.9	4.1
2	*5785.00	106.8 AV			1.10 V	98	102.7	4.1
3	11570.00	53.3 PK	74.0	-20.7	1.11 V	123	40.1	13.2
4	11570.00	43.6 AV	54.0	-10.4	1.11 V	123	30.4	13.2
5	#17355.00	47.4 PK	68.2	-20.8	1.84 V	62	29.8	17.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

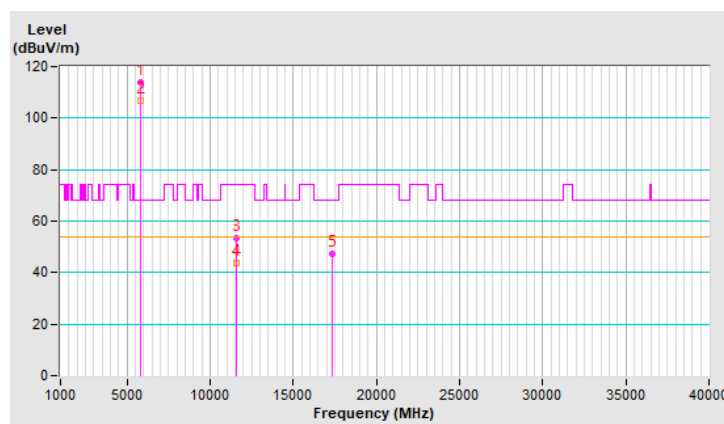


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 165 : 5825 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	103.0 PK			1.01 H	180	98.7	4.3
2	*5825.00	95.9 AV			1.01 H	180	91.6	4.3
3	11650.00	58.8 PK	74.0	-15.2	1.14 H	76	45.5	13.3
4	11650.00	47.5 AV	54.0	-6.5	1.14 H	76	34.2	13.3
5	#17475.00	46.0 PK	68.2	-22.2	1.38 H	122	28.1	17.9
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

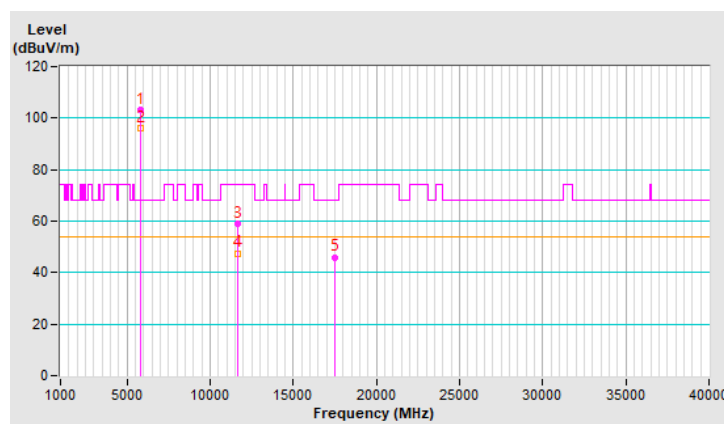


操作模式：	發射	基本波頻率：	OFDM
量測頻率範圍：	CH 165 : 5825 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	114.1 PK			1.04 V	96	109.8	4.3
2	*5825.00	106.8 AV			1.04 V	96	102.5	4.3
3	11650.00	53.3 PK	74.0	-20.7	1.22 V	115	40.0	13.3
4	11650.00	43.5 AV	54.0	-10.5	1.22 V	115	30.2	13.3
5	#17475.00	47.6 PK	68.2	-20.6	1.76 V	64	29.7	17.9
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

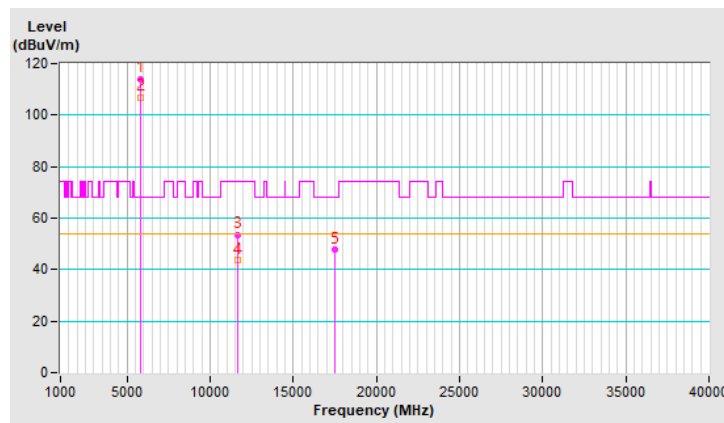


802.11ax (HE20)

操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 36：5180 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5109.94	53.0 PK	74.0	-21.0	3.75 H	199	49.3	3.7
2	5109.94	43.5 AV	54.0	-10.5	3.75 H	199	39.8	3.7
3	*5180.00	103.9 PK			3.75 H	199	100.3	3.6
4	*5180.00	94.0 AV			3.75 H	199	90.4	3.6
5	#10360.00	53.7 PK	68.2	-14.5	1.26 H	93	41.0	12.7
6	15540.00	44.7 PK	74.0	-29.3	1.46 H	112	31.5	13.2
7	15540.00	35.3 AV	54.0	-18.7	1.46 H	112	22.1	13.2
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

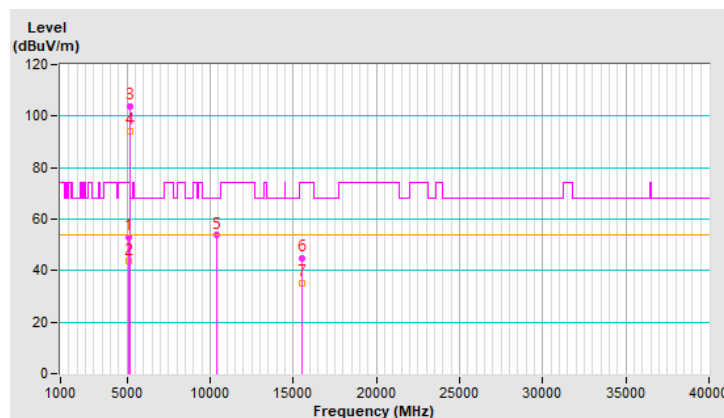


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 36：5180 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.7 PK	74.0	-14.3	1.08 V	176	56.0	3.7
2	5150.00	50.6 AV	54.0	-3.4	1.08 V	176	46.9	3.7
3	*5180.00	110.4 PK			1.08 V	176	106.8	3.6
4	*5180.00	101.3 AV			1.08 V	176	97.7	3.6
5	#10360.00	58.6 PK	68.2	-9.6	3.82 V	121	45.9	12.7
6	15540.00	46.9 PK	74.0	-27.1	1.76 V	55	33.7	13.2
7	15540.00	37.5 AV	54.0	-16.5	1.76 V	55	24.3	13.2
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

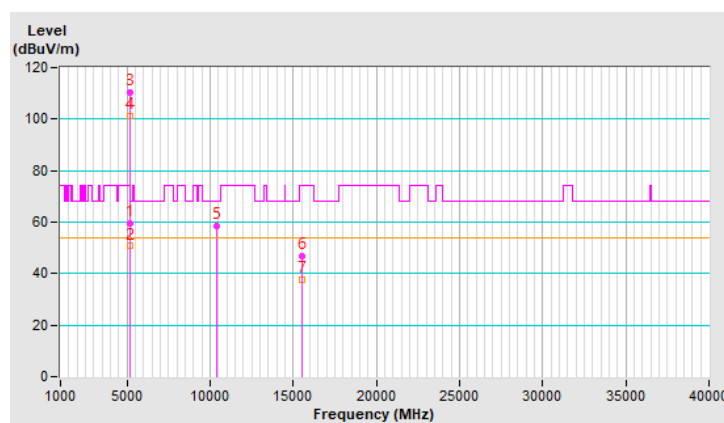


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 40：5200 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	105.0 PK			1.10 H	95	101.5	3.5
2	*5200.00	95.2 AV			1.10 H	95	91.7	3.5
3	#10400.00	53.6 PK	68.2	-14.6	1.28 H	82	40.8	12.8
4	15600.00	44.7 PK	74.0	-29.3	1.47 H	104	31.2	13.5
5	15600.00	35.2 AV	54.0	-18.8	1.47 H	104	21.7	13.5
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

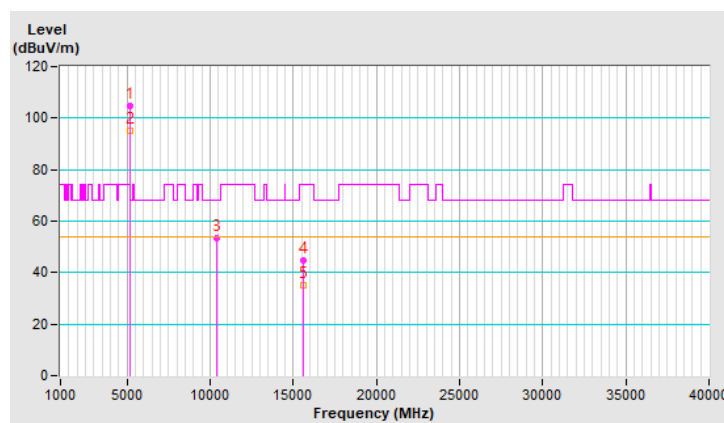


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 40：5200 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	111.6 PK			1.15 V	199	108.1	3.5
2	*5200.00	102.1 AV			1.15 V	199	98.6	3.5
3	#10400.00	60.2 PK	68.2	-8.0	3.78 V	116	47.4	12.8
4	15600.00	46.3 PK	74.0	-27.7	1.74 V	66	32.8	13.5
5	15600.00	37.1 AV	54.0	-16.9	1.74 V	66	23.6	13.5
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

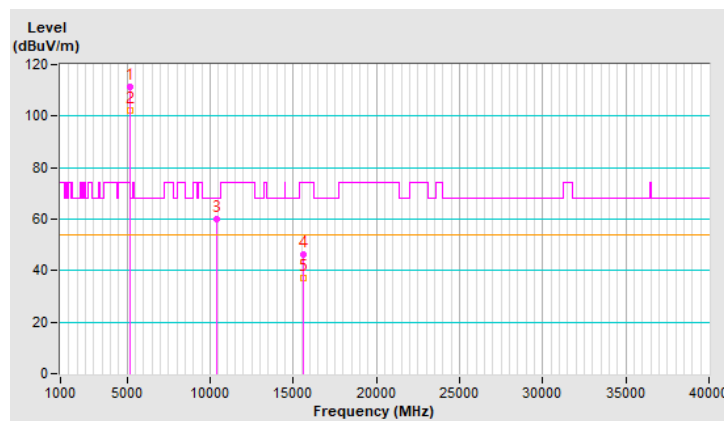


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 48：5240 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	106.6 PK			1.08 H	83	103.1	3.5
2	*5240.00	96.3 AV			1.08 H	83	92.8	3.5
3	5350.00	53.3 PK	74.0	-20.7	1.08 H	83	49.9	3.4
4	5350.00	44.5 AV	54.0	-9.5	1.08 H	83	41.1	3.4
5	#10480.00	54.9 PK	68.2	-13.3	1.32 H	69	41.8	13.1
6	15720.00	44.9 PK	74.0	-29.1	1.47 H	103	31.1	13.8
7	15720.00	35.2 AV	54.0	-18.8	1.47 H	103	21.4	13.8
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

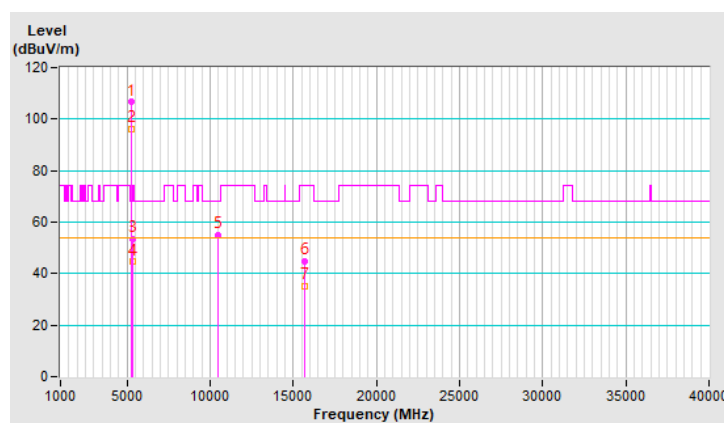


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 48：5240 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	112.2 PK			1.10 V	191	108.7	3.5
2	*5240.00	103.2 AV			1.10 V	191	99.7	3.5
3	5350.00	60.6 PK	74.0	-13.4	1.10 V	191	57.2	3.4
4	5350.00	48.7 AV	54.0	-5.3	1.10 V	191	45.3	3.4
5	#10480.00	61.3 PK	68.2	-6.9	3.75 V	129	48.2	13.1
6	15720.00	46.5 PK	74.0	-27.5	1.69 V	58	32.7	13.8
7	15720.00	37.2 AV	54.0	-16.8	1.69 V	58	23.4	13.8
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

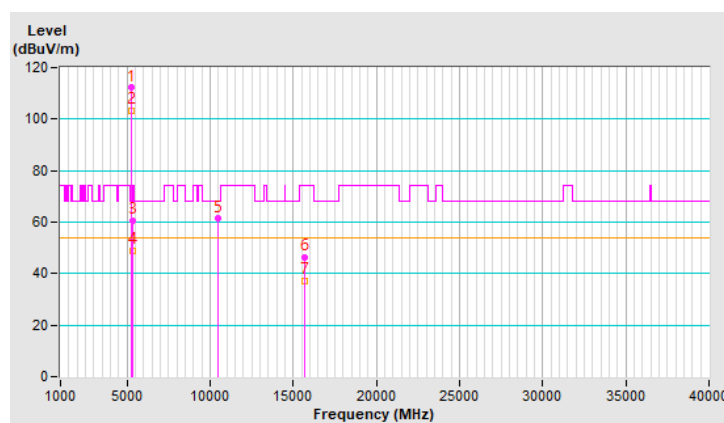


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 52：5260 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.1 PK	74.0	-20.9	1.05 H	95	49.4	3.7
2	5150.00	43.4 AV	54.0	-10.6	1.05 H	95	39.7	3.7
3	*5260.00	106.9 PK			1.05 H	95	103.5	3.4
4	*5260.00	96.8 AV			1.05 H	95	93.4	3.4
5	#10520.00	58.0 PK	68.2	-10.2	1.07 H	136	44.9	13.1
6	15780.00	47.0 PK	74.0	-27.0	1.39 H	100	33.5	13.5
7	15780.00	37.7 AV	54.0	-16.3	1.39 H	100	24.2	13.5
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

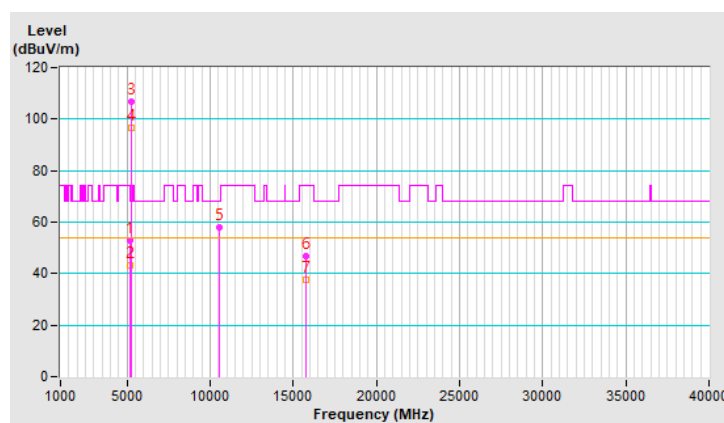


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 52：5260 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.9 PK	74.0	-13.1	1.16 V	211	57.2	3.7
2	5150.00	49.2 AV	54.0	-4.8	1.16 V	211	45.5	3.7
3	*5260.00	112.5 PK			1.16 V	211	109.1	3.4
4	*5260.00	103.6 AV			1.16 V	211	100.2	3.4
5	#10520.00	58.9 PK	68.2	-9.3	3.96 V	107	45.8	13.1
6	15780.00	47.8 PK	74.0	-26.2	1.74 V	61	34.3	13.5
7	15780.00	38.2 AV	54.0	-15.8	1.74 V	61	24.7	13.5
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

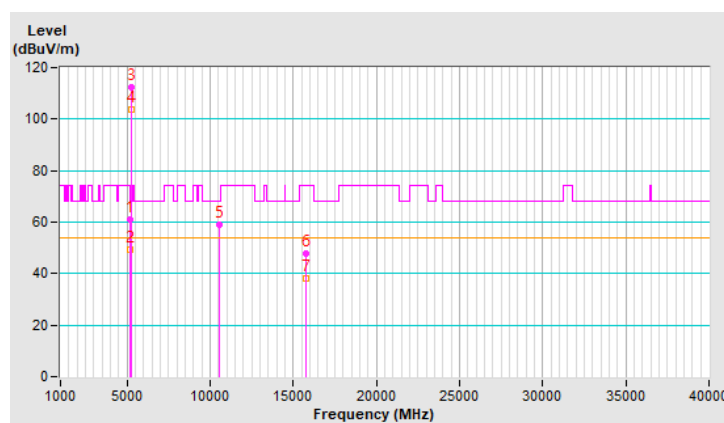


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 60：5300 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	105.9 PK			1.09 H	89	102.6	3.3
2	*5300.00	95.9 AV			1.09 H	89	92.6	3.3
3	10600.00	58.4 PK	74.0	-15.6	1.05 H	131	45.5	12.9
4	10600.00	48.0 AV	54.0	-6.0	1.05 H	131	35.1	12.9
5	15900.00	47.5 PK	74.0	-26.5	1.41 H	103	34.7	12.8
6	15900.00	38.2 AV	54.0	-15.8	1.41 H	103	25.4	12.8
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

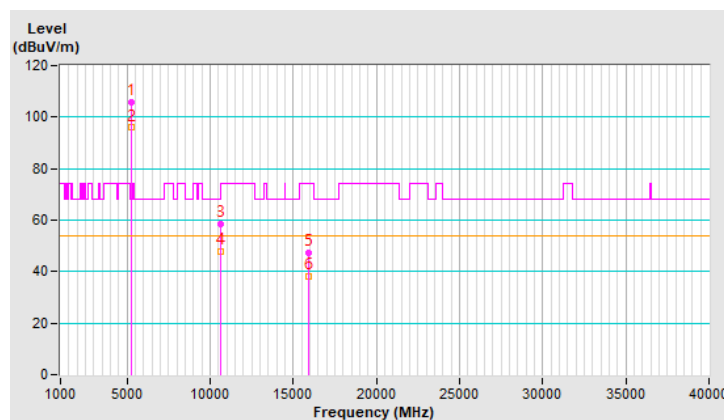


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 60：5300 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	111.6 PK			1.20 V	224	108.3	3.3
2	*5300.00	102.9 AV			1.20 V	224	99.6	3.3
3	10600.00	58.9 PK	74.0	-15.1	4.00 V	92	46.0	12.9
4	10600.00	48.4 AV	54.0	-5.6	4.00 V	92	35.5	12.9
5	15900.00	48.0 PK	74.0	-26.0	1.72 V	76	35.2	12.8
6	15900.00	38.4 AV	54.0	-15.6	1.72 V	76	25.6	12.8
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

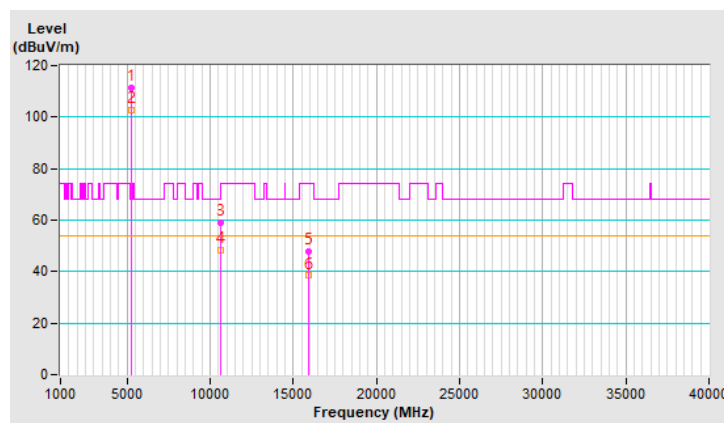


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 64：5320 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	103.7 PK			3.39 H	234	100.3	3.4
2	*5320.00	93.5 AV			3.39 H	234	90.1	3.4
3	5350.00	52.6 PK	74.0	-21.4	3.39 H	234	49.2	3.4
4	5350.00	43.5 AV	54.0	-10.5	3.39 H	234	40.1	3.4
5	10640.00	53.4 PK	74.0	-20.6	1.25 H	85	40.5	12.9
6	10640.00	47.0 AV	54.0	-7.0	1.25 H	85	34.1	12.9
7	15960.00	44.2 PK	74.0	-29.8	1.46 H	99	31.4	12.8
8	15960.00	35.0 AV	54.0	-19.0	1.46 H	99	22.2	12.8
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

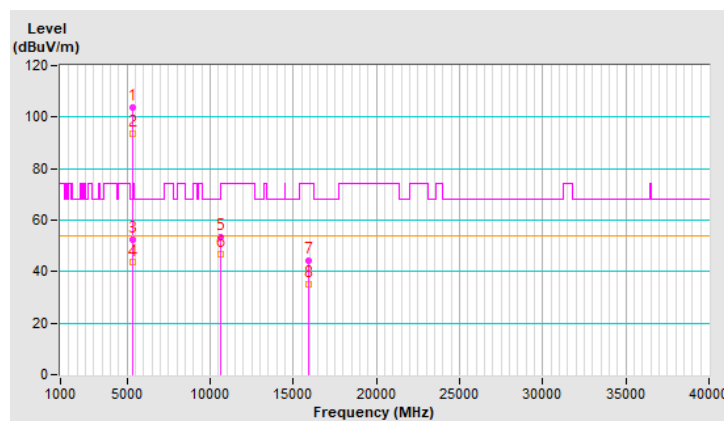


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 64：5320 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.6 PK			1.07 V	66	108.2	3.4
2	*5320.00	101.1 AV			1.07 V	66	97.7	3.4
3	5350.00	60.6 PK	74.0	-13.4	1.07 V	66	57.2	3.4
4	5350.00	48.8 AV	54.0	-5.2	1.07 V	66	45.4	3.4
5	10640.00	57.5 PK	74.0	-16.5	3.92 V	96	44.6	12.9
6	10640.00	47.3 AV	54.0	-6.7	3.92 V	96	34.4	12.9
7	15960.00	48.1 PK	74.0	-25.9	1.72 V	80	35.3	12.8
8	15960.00	37.8 AV	54.0	-16.2	1.72 V	80	25.0	12.8
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

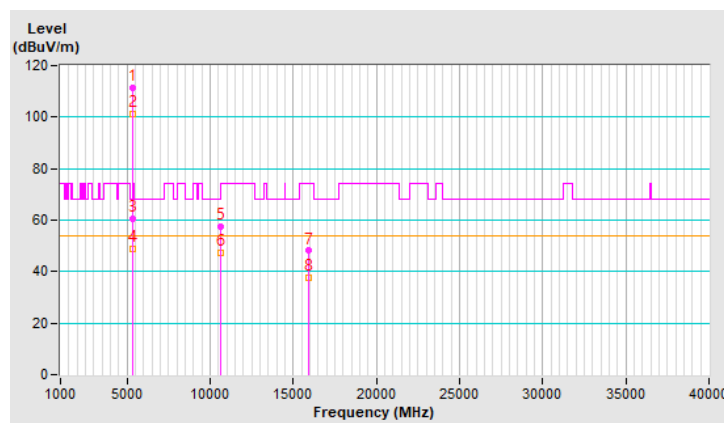


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 100 : 5500 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.8 PK	74.0	-22.2	1.04 H	134	48.0	3.8
2	5460.00	43.5 AV	54.0	-10.5	1.04 H	134	39.7	3.8
3	#5470.00	52.3 PK	68.2	-15.9	1.04 H	134	48.4	3.9
4	*5500.00	104.6 PK			1.04 H	134	100.7	3.9
5	*5500.00	94.0 AV			1.04 H	134	90.1	3.9
6	11000.00	57.4 PK	74.0	-16.6	1.08 H	141	44.4	13.0
7	11000.00	46.9 AV	54.0	-7.1	1.08 H	141	33.9	13.0
8	#16500.00	47.6 PK	68.2	-20.6	1.38 H	110	33.0	14.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

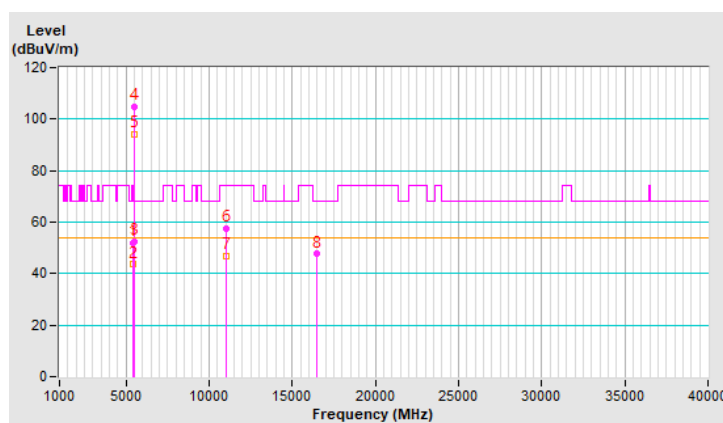


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 100 : 5500 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.6 PK	74.0	-15.4	1.07 V	139	54.8	3.8
2	5460.00	48.7 AV	54.0	-5.3	1.07 V	139	44.9	3.8
3	#5470.00	60.2 PK	68.2	-8.0	1.07 V	139	56.3	3.9
4	*5500.00	109.8 PK			1.07 V	139	105.9	3.9
5	*5500.00	100.0 AV			1.07 V	139	96.1	3.9
6	11000.00	57.8 PK	74.0	-16.2	4.00 V	95	44.8	13.0
7	11000.00	47.3 AV	54.0	-6.7	4.00 V	95	34.3	13.0
8	#16500.00	47.6 PK	68.2	-20.6	1.75 V	71	33.0	14.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

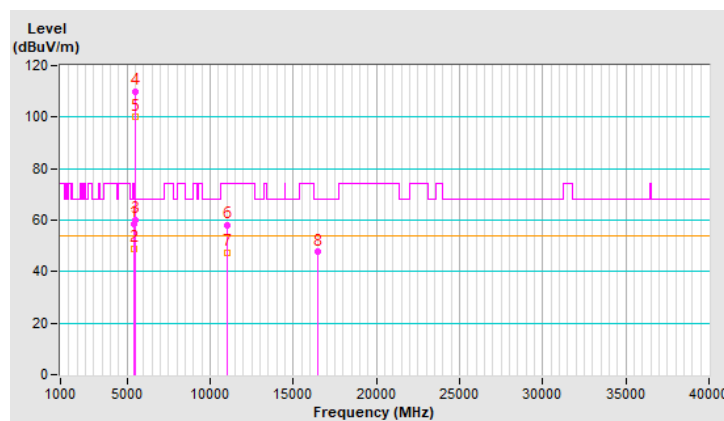


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 116：5580 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	106.0 PK			1.11 H	99	102.2	3.8
2	*5580.00	96.0 AV			1.11 H	99	92.2	3.8
3	11160.00	58.3 PK	74.0	-15.7	1.09 H	140	45.2	13.1
4	11160.00	47.7 AV	54.0	-6.3	1.09 H	140	34.6	13.1
5	#16740.00	48.1 PK	68.2	-20.1	1.39 H	116	31.9	16.2
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

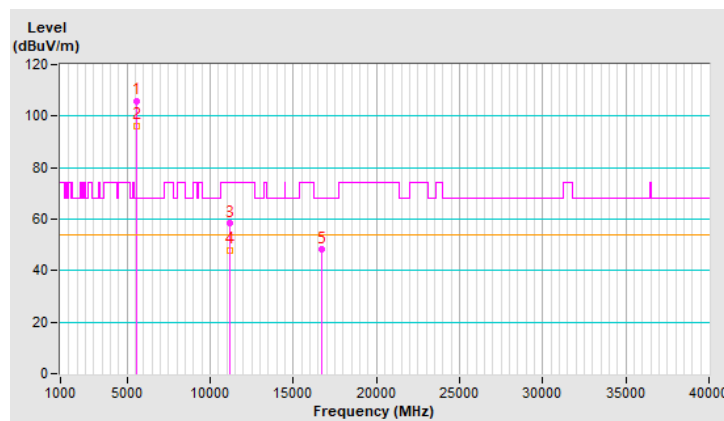


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 116 : 5580 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	112.4 PK			1.15 V	226	108.6	3.8
2	*5580.00	103.3 AV			1.15 V	226	99.5	3.8
3	11160.00	59.5 PK	74.0	-14.5	3.91 V	109	46.4	13.1
4	11160.00	48.8 AV	54.0	-5.2	3.91 V	109	35.7	13.1
5	#16740.00	48.6 PK	68.2	-19.6	1.78 V	55	32.4	16.2
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

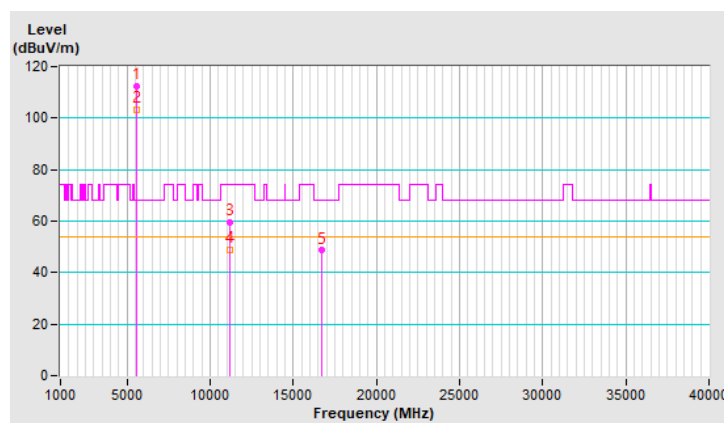


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 140：5700 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	104.8 PK			1.15 H	110	100.8	4.0
2	*5700.00	95.1 AV			1.15 H	110	91.1	4.0
3	#5725.00	60.3 PK	68.2	-7.9	1.15 H	110	56.3	4.0
4	11400.00	57.2 PK	74.0	-16.8	1.04 H	130	44.0	13.2
5	11400.00	46.9 AV	54.0	-7.1	1.04 H	130	33.7	13.2
6	#17100.00	47.3 PK	68.2	-20.9	1.41 H	110	30.1	17.2
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

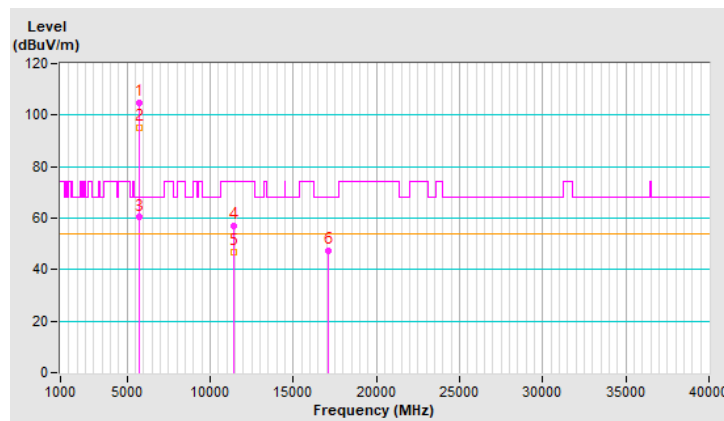


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 140：5700 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.7 PK			1.07 V	140	106.7	4.0
2	*5700.00	101.8 AV			1.07 V	140	97.8	4.0
3	#5725.00	65.5 PK	68.2	-2.7	1.07 V	140	61.5	4.0
4	11400.00	57.2 PK	74.0	-16.8	3.99 V	88	44.0	13.2
5	11400.00	47.1 AV	54.0	-6.9	3.99 V	88	33.9	13.2
6	#17100.00	47.9 PK	68.2	-20.3	1.70 V	75	30.7	17.2
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

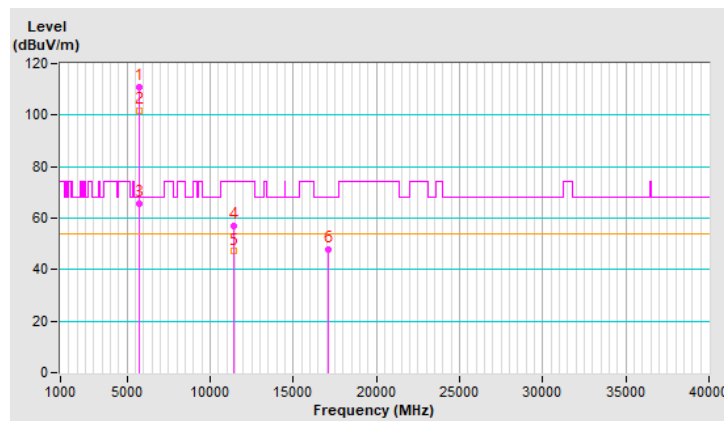


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 144 : 5720 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.4 PK	74.0	-22.6	1.10 H	98	47.6	3.8
2	5460.00	41.7 AV	54.0	-12.3	1.10 H	98	37.9	3.8
3	#5470.00	51.7 PK	68.2	-16.5	1.10 H	98	47.8	3.9
4	*5720.00	105.4 PK			1.10 H	98	101.5	3.9
5	*5720.00	95.5 AV			1.10 H	98	91.6	3.9
6	#5850.00	57.3 PK	68.2	-10.9	1.10 H	98	52.9	4.4
7	11440.00	58.9 PK	74.0	-15.1	1.08 H	141	45.6	13.3
8	11440.00	48.2 AV	54.0	-5.8	1.08 H	141	34.9	13.3
9	#17160.00	48.5 PK	68.2	-19.7	1.39 H	128	31.1	17.4
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

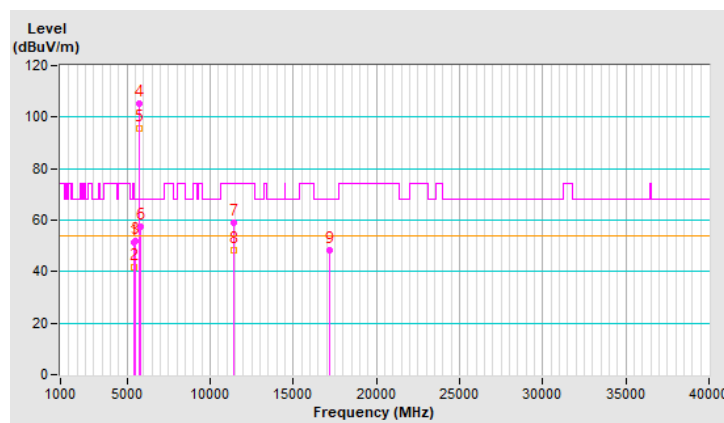


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 144 : 5720 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.4 PK	74.0	-22.6	1.10 V	143	47.6	3.8
2	5460.00	41.5 AV	54.0	-12.5	1.10 V	143	37.7	3.8
3	#5470.00	52.0 PK	68.2	-16.2	1.10 V	143	48.1	3.9
4	*5720.00	112.1 PK			1.10 V	143	108.2	3.9
5	*5720.00	102.9 AV			1.10 V	143	99.0	3.9
6	#5850.00	58.3 PK	68.2	-9.9	1.10 V	143	53.9	4.4
7	11440.00	57.2 PK	74.0	-16.8	3.86 V	98	43.9	13.3
8	11440.00	47.1 AV	54.0	-6.9	3.86 V	98	33.8	13.3
9	#17160.00	47.9 PK	68.2	-20.3	1.66 V	78	30.5	17.4
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

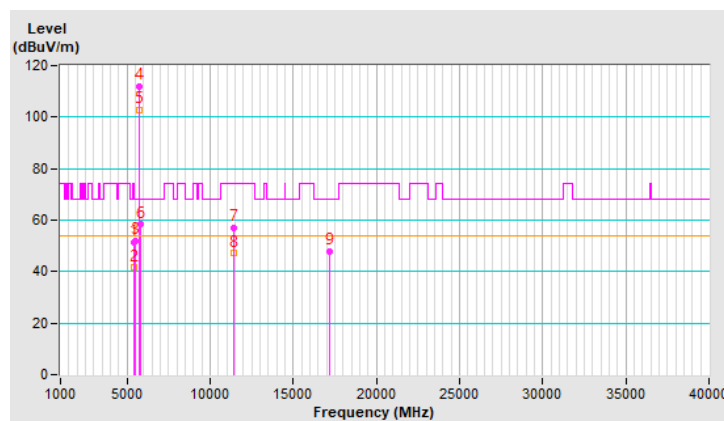


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 149：5745 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	102.8 PK			1.03 H	174	98.8	4.0
2	*5745.00	95.9 AV			1.03 H	174	91.9	4.0
3	11490.00	57.6 PK	74.0	-16.4	1.15 H	75	44.3	13.3
4	11490.00	46.3 AV	54.0	-7.7	1.15 H	75	33.0	13.3
5	#17235.00	48.6 PK	68.2	-19.6	1.35 H	122	31.0	17.6
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

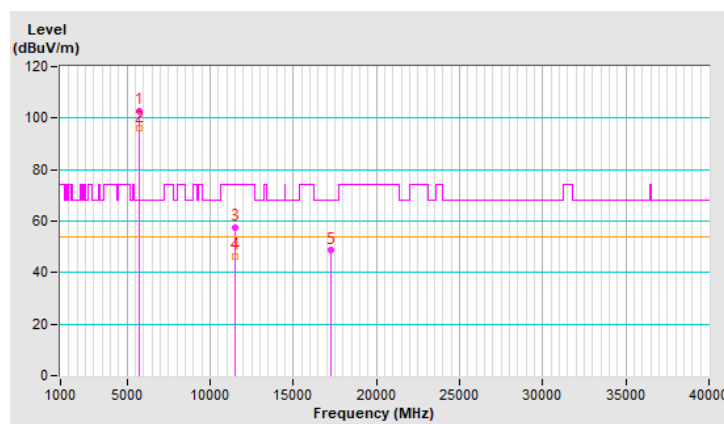


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 149：5745 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	113.2 PK			1.23 V	106	109.2	4.0
2	*5745.00	104.2 AV			1.23 V	106	100.2	4.0
3	11490.00	54.9 PK	74.0	-19.1	3.36 V	68	41.6	13.3
4	11490.00	43.6 AV	54.0	-10.4	3.36 V	68	30.3	13.3
5	#17235.00	50.2 PK	68.2	-18.0	3.35 V	195	32.6	17.6
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

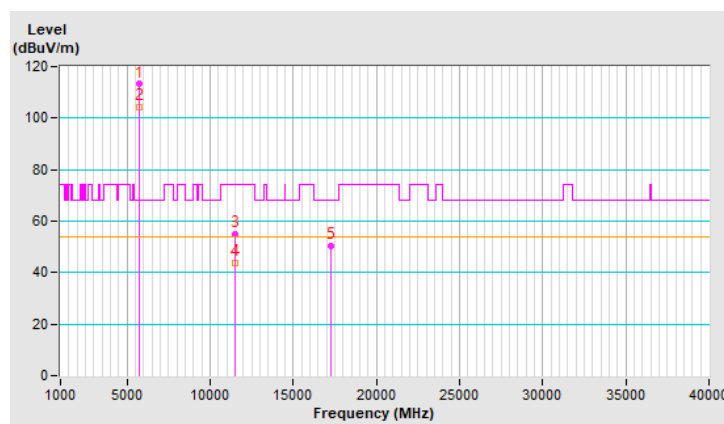


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 157 : 5785 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	102.9 PK			1.03 H	181	98.8	4.1
2	*5785.00	95.7 AV			1.03 H	181	91.6	4.1
3	11570.00	57.8 PK	74.0	-16.2	1.19 H	89	44.6	13.2
4	11570.00	46.8 AV	54.0	-7.2	1.19 H	89	33.6	13.2
5	#17355.00	48.5 PK	68.2	-19.7	1.36 H	123	30.9	17.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

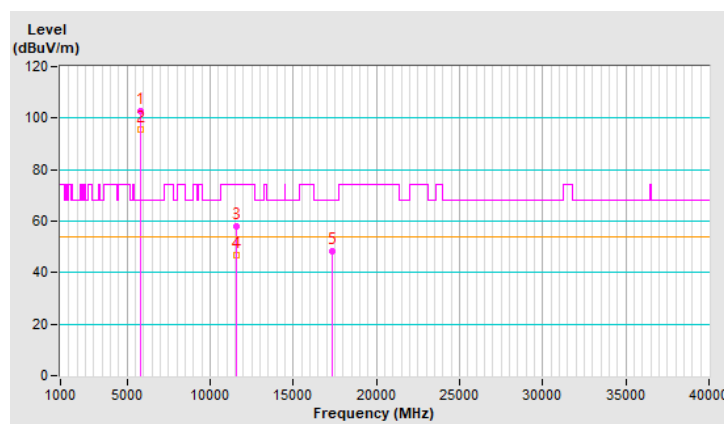


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 157 : 5785 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	113.4 PK			1.26 V	111	109.3	4.1
2	*5785.00	104.5 AV			1.26 V	111	100.4	4.1
3	11570.00	55.6 PK	74.0	-18.4	3.36 V	73	42.4	13.2
4	11570.00	44.0 AV	54.0	-10.0	3.36 V	73	30.8	13.2
5	#17355.00	49.3 PK	68.2	-18.9	3.31 V	197	31.7	17.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

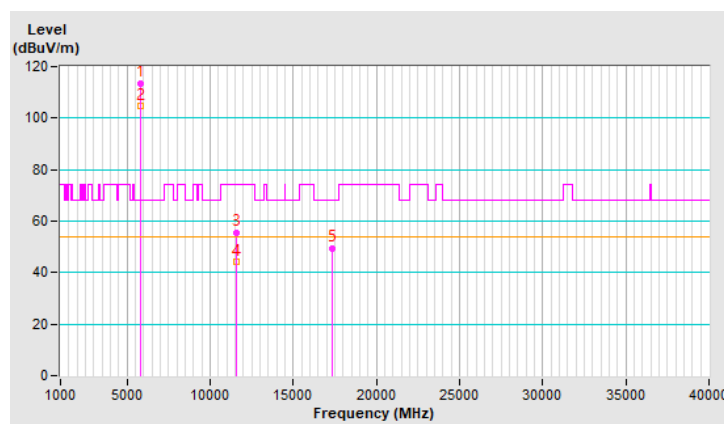


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 165 : 5825 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	103.0 PK			1.05 H	161	98.7	4.3
2	*5825.00	95.9 AV			1.05 H	161	91.6	4.3
3	11650.00	57.4 PK	74.0	-16.6	1.20 H	77	44.1	13.3
4	11650.00	46.2 AV	54.0	-7.8	1.20 H	77	32.9	13.3
5	#17475.00	49.1 PK	68.2	-19.1	1.32 H	137	31.2	17.9
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

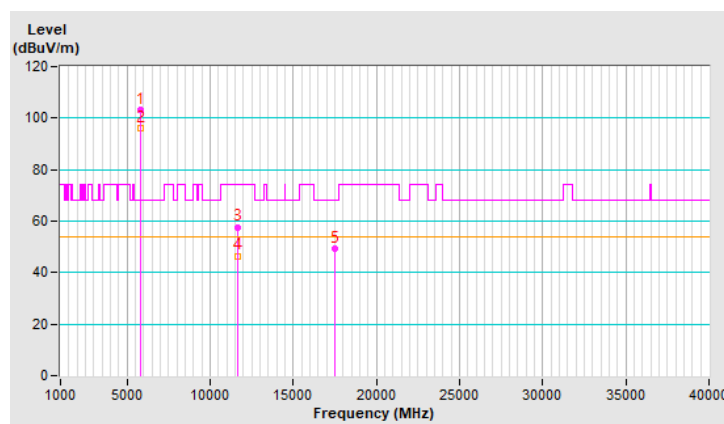


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 165 : 5825 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	113.6 PK			1.19 V	114	109.3	4.3
2	*5825.00	104.4 AV			1.19 V	114	100.1	4.3
3	11650.00	54.7 PK	74.0	-19.3	3.37 V	76	41.4	13.3
4	11650.00	43.3 AV	54.0	-10.7	3.37 V	76	30.0	13.3
5	#17475.00	48.9 PK	68.2	-19.3	3.35 V	216	31.0	17.9
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

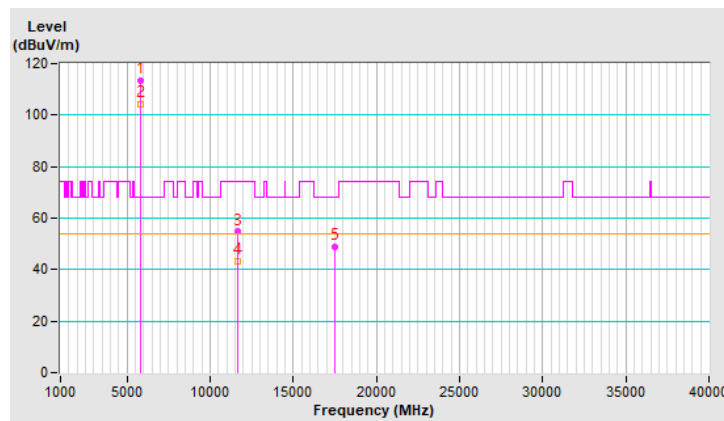


802.11ax (HE40)

操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 38 : 5190 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5100.00	53.3 PK	74.0	-20.7	3.73 H	200	49.6	3.7
2	5100.00	42.4 AV	54.0	-11.6	3.73 H	200	38.7	3.7
3	*5190.00	101.4 PK			3.73 H	200	97.8	3.6
4	*5190.00	91.7 AV			3.73 H	200	88.1	3.6
5	#10380.00	52.6 PK	68.2	-15.6	1.16 H	135	39.9	12.7
6	15570.00	50.3 PK	74.0	-23.7	1.41 H	106	36.9	13.4
7	15570.00	39.1 AV	54.0	-14.9	1.41 H	106	25.7	13.4
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

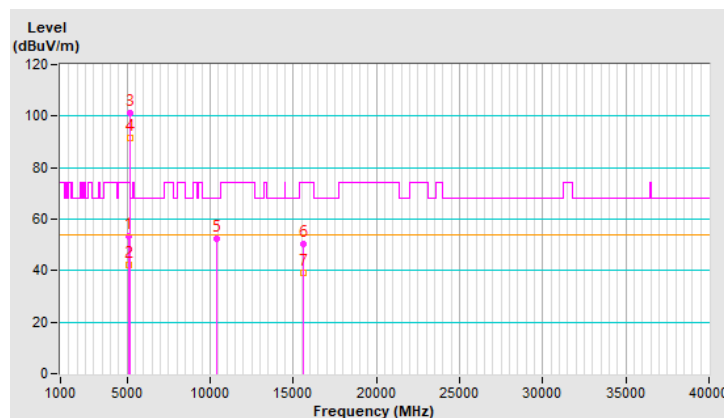


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 38 : 5190 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	1.18 V	161	56.7	3.7
2	5150.00	50.4 AV	54.0	-3.6	1.18 V	161	46.7	3.7
3	*5190.00	108.0 PK			1.18 V	161	104.4	3.6
4	*5190.00	99.4 AV			1.18 V	161	95.8	3.6
5	#10380.00	52.5 PK	68.2	-15.7	3.29 V	64	39.8	12.7
6	15570.00	49.3 PK	74.0	-24.7	3.18 V	174	35.9	13.4
7	15570.00	38.2 AV	54.0	-15.8	3.18 V	174	24.8	13.4
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

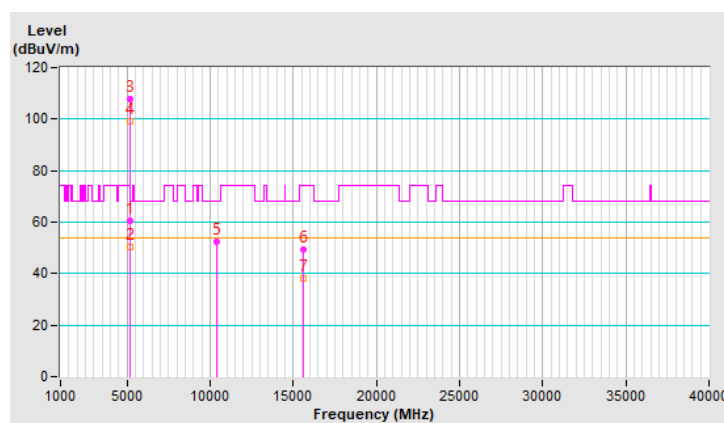


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 46：5230 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	104.6 PK			3.72 H	193	101.1	3.5
2	*5230.00	95.0 AV			3.72 H	193	91.5	3.5
3	5350.00	53.2 PK	74.0	-20.8	3.72 H	193	49.8	3.4
4	5350.00	42.0 AV	54.0	-12.0	3.72 H	193	38.6	3.4
5	#10460.00	52.6 PK	68.2	-15.6	1.13 H	137	39.6	13.0
6	15690.00	50.0 PK	74.0	-24.0	1.35 H	104	36.1	13.9
7	15690.00	38.8 AV	54.0	-15.2	1.35 H	104	24.9	13.9
8	20920.00	-	-	-	-	-	-	-
9	#26150.00	-	-	-	-	-	-	-
10	31380.00	-	-	-	-	-	-	-
11	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

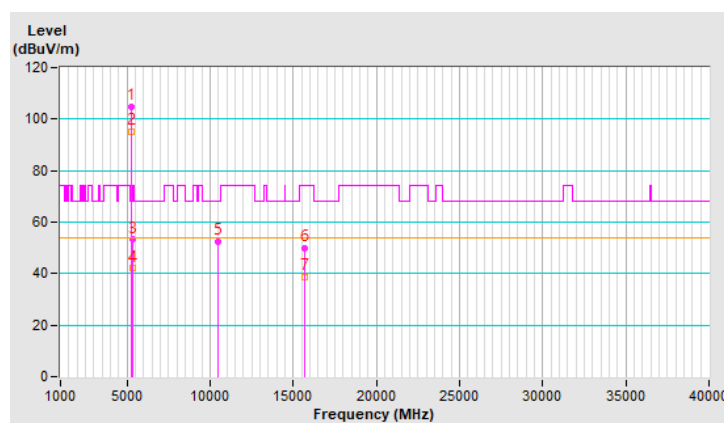


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 46：5230 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	110.9 PK			1.19 V	154	107.4	3.5
2	*5230.00	102.6 AV			1.19 V	154	99.1	3.5
3	5350.00	59.6 PK	74.0	-14.4	1.19 V	154	56.2	3.4
4	5350.00	47.3 AV	54.0	-6.7	1.19 V	154	43.9	3.4
5	#10460.00	52.4 PK	68.2	-15.8	3.37 V	66	39.4	13.0
6	15690.00	49.3 PK	74.0	-24.7	3.16 V	198	35.4	13.9
7	15690.00	38.3 AV	54.0	-15.7	3.16 V	198	24.4	13.9
8	20920.00	-	-	-	-	-	-	-
9	#26150.00	-	-	-	-	-	-	-
10	31380.00	-	-	-	-	-	-	-
11	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

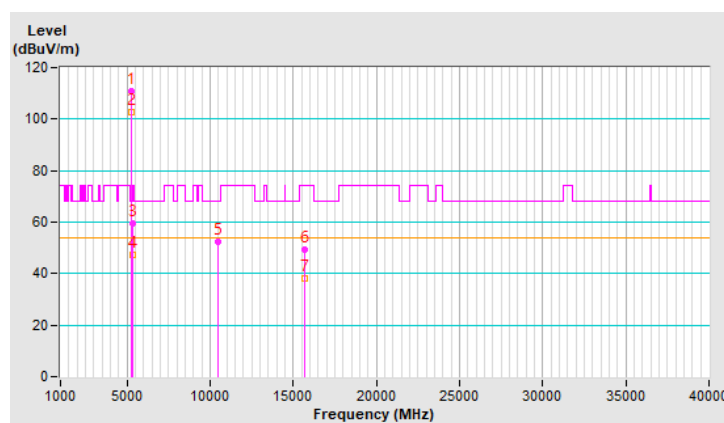


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 54 : 5270 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.8 PK	74.0	-20.2	3.71 H	198	50.1	3.7
2	5150.00	42.4 AV	54.0	-11.6	3.71 H	198	38.7	3.7
3	*5270.00	104.3 PK			3.71 H	198	100.9	3.4
4	*5270.00	94.6 AV			3.71 H	198	91.2	3.4
5	#10540.00	52.0 PK	68.2	-16.2	1.10 H	130	39.0	13.0
6	15810.00	48.6 PK	74.0	-25.4	1.31 H	108	35.4	13.2
7	15810.00	37.9 AV	54.0	-16.1	1.31 H	108	24.7	13.2
8	21080.00	-	-	-	-	-	-	-
9	#26350.00	-	-	-	-	-	-	-
10	31620.00	-	-	-	-	-	-	-
11	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

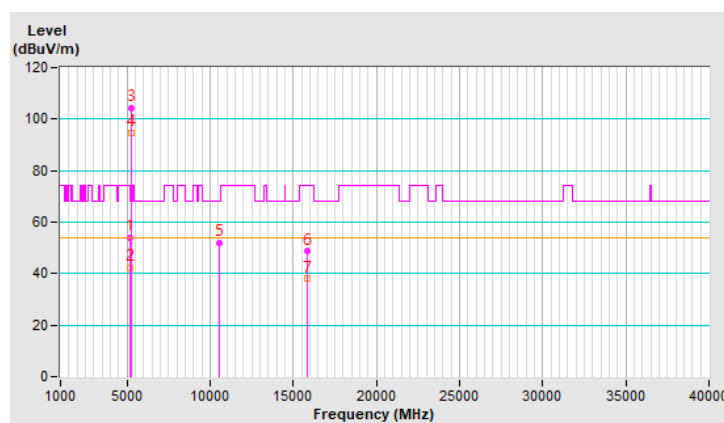


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 54 : 5270 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.4 PK	74.0	-14.6	1.20 V	142	55.7	3.7
2	5150.00	48.2 AV	54.0	-5.8	1.20 V	142	44.5	3.7
3	*5270.00	111.4 PK			1.20 V	142	108.0	3.4
4	*5270.00	102.1 AV			1.20 V	142	98.7	3.4
5	#10540.00	52.1 PK	68.2	-16.1	3.39 V	50	39.1	13.0
6	15810.00	50.0 PK	74.0	-24.0	3.14 V	180	36.8	13.2
7	15810.00	38.9 AV	54.0	-15.1	3.14 V	180	25.7	13.2
8	21080.00	-	-	-	-	-	-	-
9	#26350.00	-	-	-	-	-	-	-
10	31620.00	-	-	-	-	-	-	-
11	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

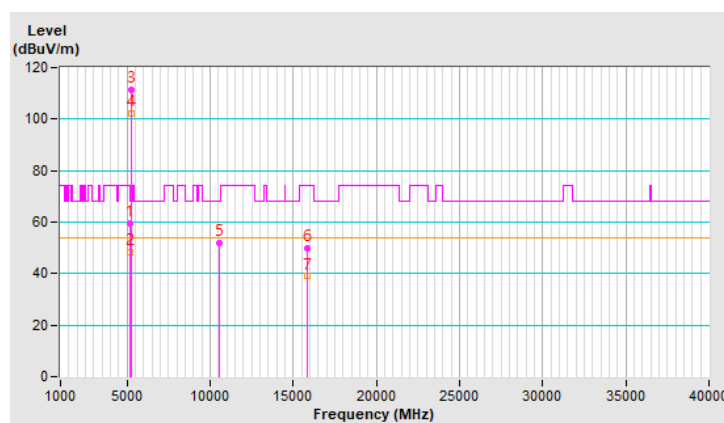


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 62：5310 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	100.2 PK			3.60 H	234	96.9	3.3
2	*5310.00	91.2 AV			3.60 H	234	87.9	3.3
3	5350.00	51.4 PK	74.0	-22.6	3.60 H	234	48.0	3.4
4	5350.00	42.5 AV	54.0	-11.5	3.60 H	234	39.1	3.4
5	10620.00	51.5 PK	74.0	-22.5	1.09 H	137	38.6	12.9
6	10620.00	42.5 AV	54.0	-11.5	1.09 H	137	29.6	12.9
7	15930.00	49.9 PK	74.0	-24.1	1.40 H	94	37.1	12.8
8	15930.00	39.3 AV	54.0	-14.7	1.40 H	94	26.5	12.8
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

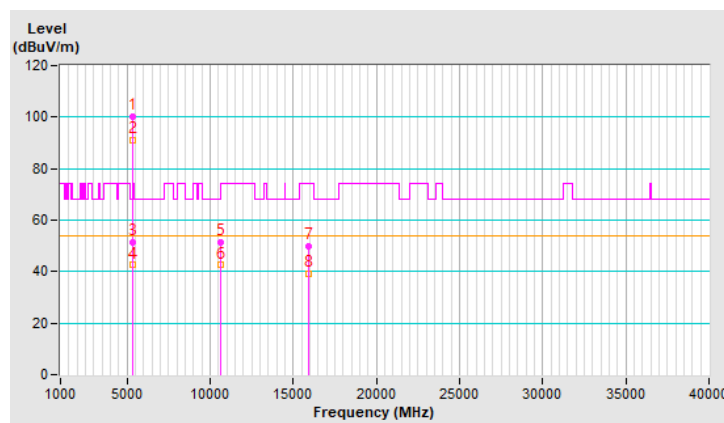


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 62：5310 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	108.1 PK			1.13 V	101	104.8	3.3
2	*5310.00	99.1 AV			1.13 V	101	95.8	3.3
3	5350.00	58.6 PK	74.0	-15.4	1.13 V	101	55.2	3.4
4	5350.00	48.8 AV	54.0	-5.2	1.13 V	101	45.4	3.4
5	10620.00	52.0 PK	74.0	-22.0	3.30 V	53	39.1	12.9
6	10620.00	42.8 AV	54.0	-11.2	3.30 V	53	29.9	12.9
7	15930.00	49.6 PK	74.0	-24.4	3.18 V	196	36.8	12.8
8	15930.00	38.9 AV	54.0	-15.1	3.18 V	196	26.1	12.8
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

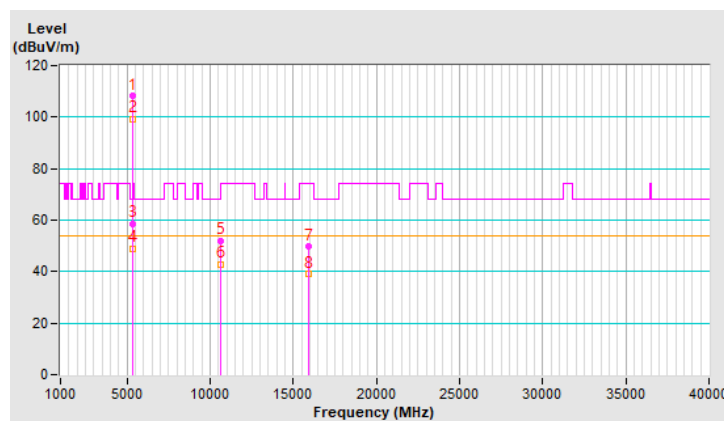


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 102 : 5510 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.5 PK	74.0	-20.5	1.08 H	135	49.7	3.8
2	5460.00	44.0 AV	54.0	-10.0	1.08 H	135	40.2	3.8
3	#5470.00	54.8 PK	68.2	-13.4	1.08 H	135	50.9	3.9
4	*5510.00	101.1 PK			1.08 H	135	97.2	3.9
5	*5510.00	92.0 AV			1.08 H	135	88.1	3.9
6	11020.00	51.1 PK	74.0	-22.9	1.07 H	152	38.1	13.0
7	11020.00	42.1 AV	54.0	-11.9	1.07 H	152	29.1	13.0
8	#16530.00	50.0 PK	68.2	-18.2	1.35 H	82	35.3	14.7
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

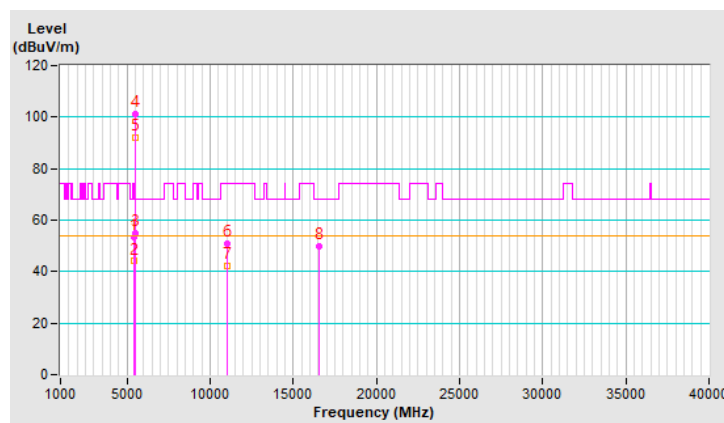


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 102 : 5510 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.3 PK	74.0	-11.7	1.04 V	97	58.5	3.8
2	5460.00	50.3 AV	54.0	-3.7	1.04 V	97	46.5	3.8
3	#5470.00	65.5 PK	68.2	-2.7	1.04 V	97	61.6	3.9
4	*5510.00	106.6 PK			1.04 V	97	102.7	3.9
5	*5510.00	97.5 AV			1.04 V	97	93.6	3.9
6	11020.00	52.1 PK	74.0	-21.9	3.32 V	54	39.1	13.0
7	11020.00	43.1 AV	54.0	-10.9	3.32 V	54	30.1	13.0
8	#16530.00	49.2 PK	68.2	-19.0	3.09 V	177	34.5	14.7
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

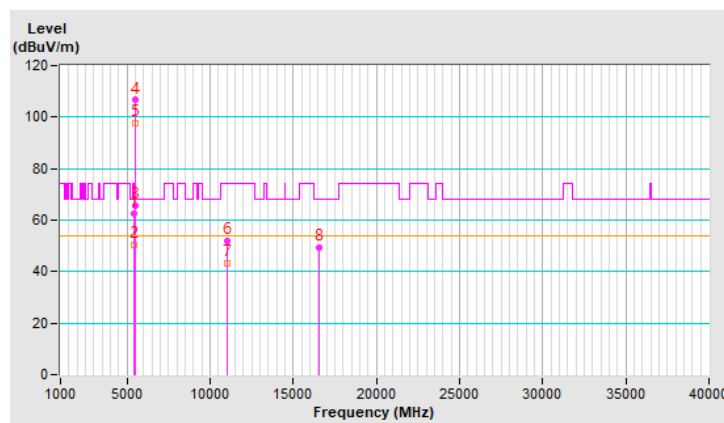


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 110：5550 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	104.6 PK			1.05 H	150	100.8	3.8
2	*5550.00	93.9 AV			1.05 H	150	90.1	3.8
3	11100.00	51.1 PK	74.0	-22.9	1.16 H	119	38.1	13.0
4	11100.00	42.1 AV	54.0	-11.9	1.16 H	119	29.1	13.0
5	#16650.00	49.5 PK	68.2	-18.7	1.28 H	117	33.8	15.7
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

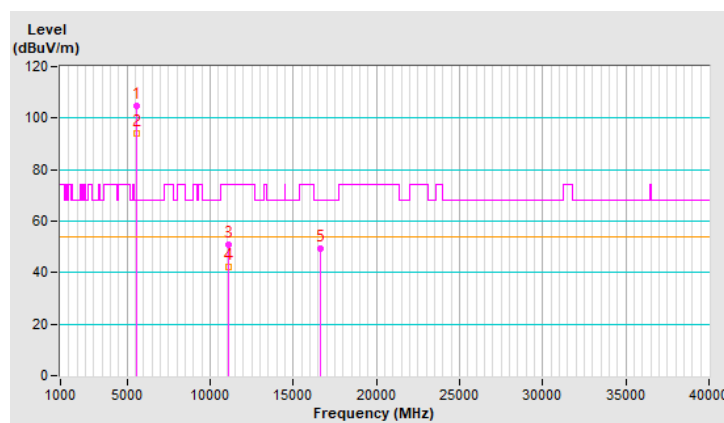


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 110：5550 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	111.0 PK			1.15 V	163	107.2	3.8
2	*5550.00	102.7 AV			1.15 V	163	98.9	3.8
3	11100.00	51.8 PK	74.0	-22.2	3.31 V	53	38.8	13.0
4	11100.00	44.2 AV	54.0	-9.8	3.31 V	53	31.2	13.0
5	#16650.00	49.0 PK	68.2	-19.2	3.17 V	196	33.3	15.7
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

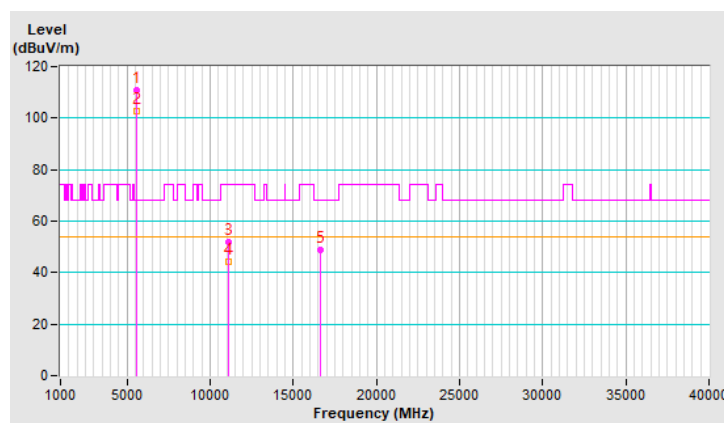


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 134 : 5670 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	104.7 PK			1.02 H	142	100.7	4.0
2	*5670.00	93.9 AV			1.02 H	142	89.9	4.0
3	#5725.00	53.5 PK	68.2	-14.7	1.02 H	142	49.5	4.0
4	11340.00	51.4 PK	74.0	-22.6	1.04 H	163	38.2	13.2
5	11340.00	42.1 AV	54.0	-11.9	1.04 H	163	28.9	13.2
6	#17010.00	50.4 PK	68.2	-17.8	1.35 H	76	33.4	17.0
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

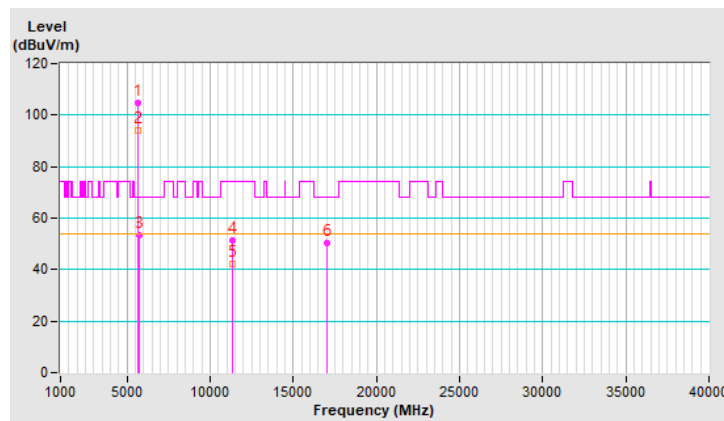


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 134 : 5670 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	111.3 PK			1.23 V	149	107.3	4.0
2	*5670.00	102.0 AV			1.23 V	149	98.0	4.0
3	#5725.00	61.3 PK	68.2	-6.9	1.23 V	149	57.3	4.0
4	11340.00	52.0 PK	74.0	-22.0	3.34 V	67	38.8	13.2
5	11340.00	43.2 AV	54.0	-10.8	3.34 V	67	30.0	13.2
6	#17010.00	49.0 PK	68.2	-19.2	3.18 V	173	32.0	17.0
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

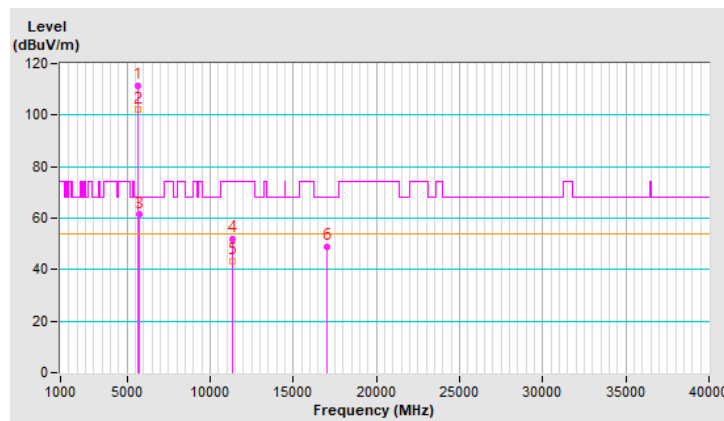


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 142：5710 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.2 PK	74.0	-21.8	1.17 H	140	48.4	3.8
2	5460.00	42.7 AV	54.0	-11.3	1.17 H	140	38.9	3.8
3	#5470.00	52.7 PK	68.2	-15.5	1.17 H	140	48.8	3.9
4	*5710.00	105.3 PK			1.17 H	140	101.3	4.0
5	*5710.00	94.3 AV			1.17 H	140	90.3	4.0
6	#5850.00	61.3 PK	68.2	-6.9	1.17 H	140	56.9	4.4
7	11420.00	51.2 PK	74.0	-22.8	1.22 H	128	38.0	13.2
8	11420.00	42.2 AV	54.0	-11.8	1.22 H	128	29.0	13.2
9	#17130.00	49.0 PK	68.2	-19.2	1.29 H	129	31.8	17.2
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

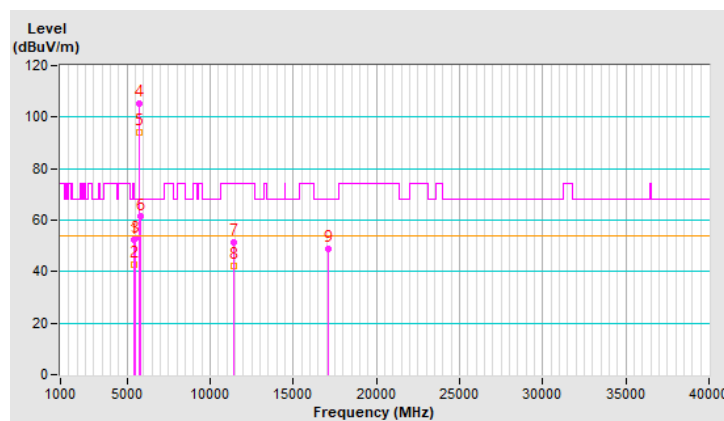


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 142 : 5710 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.3 PK	74.0	-21.7	1.28 V	147	48.5	3.8
2	5460.00	42.5 AV	54.0	-11.5	1.28 V	147	38.7	3.8
3	#5470.00	52.4 PK	68.2	-15.8	1.28 V	147	48.5	3.9
4	*5710.00	110.8 PK			1.28 V	147	106.8	4.0
5	*5710.00	101.5 AV			1.28 V	147	97.5	4.0
6	#5850.00	56.7 PK	68.2	-11.5	1.28 V	147	52.3	4.4
7	11420.00	51.8 PK	74.0	-22.2	3.35 V	62	38.6	13.2
8	11420.00	42.4 AV	54.0	-11.6	3.35 V	62	29.2	13.2
9	#17130.00	49.3 PK	68.2	-18.9	3.14 V	186	32.1	17.2
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

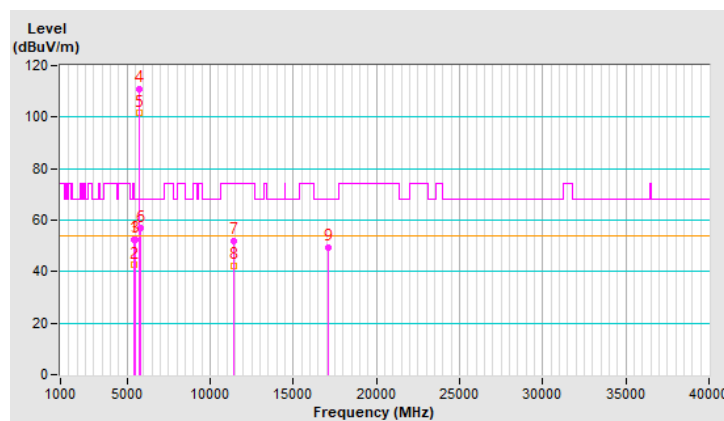


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 151 : 5755 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	99.8 PK			1.03 H	149	95.8	4.0
2	*5755.00	90.9 AV			1.03 H	149	86.9	4.0
3	11510.00	54.4 PK	74.0	-19.6	1.15 H	104	41.1	13.3
4	11510.00	42.4 AV	54.0	-11.6	1.15 H	104	29.1	13.3
5	#17265.00	48.3 PK	68.2	-19.9	1.32 H	105	30.8	17.5
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

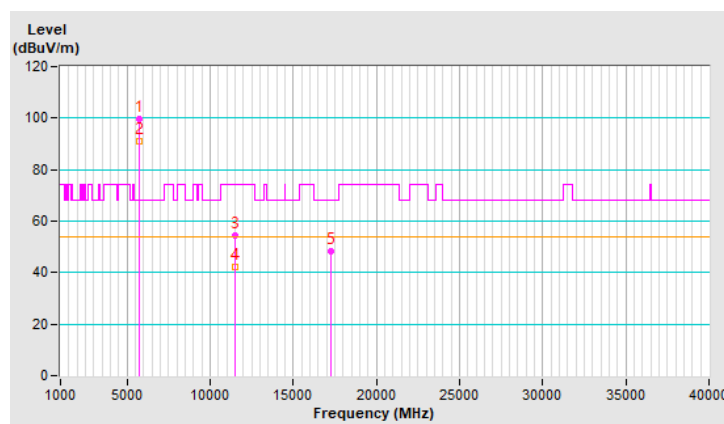


操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 151 : 5755 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	109.8 PK			1.13 V	137	105.8	4.0
2	*5755.00	100.4 AV			1.13 V	137	96.4	4.0
3	11510.00	52.2 PK	74.0	-21.8	3.31 V	58	38.9	13.3
4	11510.00	39.9 AV	54.0	-14.1	3.31 V	58	26.6	13.3
5	#17265.00	49.6 PK	68.2	-18.6	3.18 V	178	32.1	17.5
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

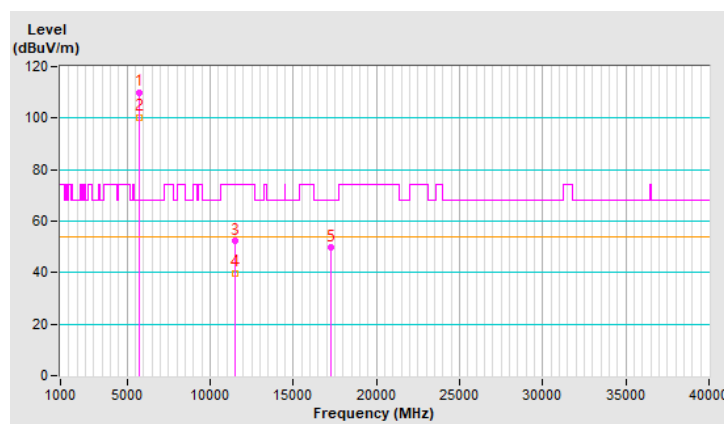

操作模式：	發射	基本波頻率：	OFDMA
量測頻率範圍：	CH 159 : 5795 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=300Hz
量測場地溫度：	23°C	量測場地濕度：	67%RH
測試日期：	109 年 9 月 20 日	測試者：	彭瀚淳

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	99.5 PK			1.05 H	146	95.3	4.2
2	*5795.00	90.7 AV			1.05 H	146	86.5	4.2
3	11590.00	54.4 PK	74.0	-19.6	1.16 H	97	41.1	13.3
4	11590.00	42.6 AV	54.0	-11.4	1.16 H	97	29.3	13.3
5	#17385.00	48.4 PK	68.2	-19.8	1.38 H	107	30.7	17.7
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

