

Prüfbericht-Nr.: Test report no.:		CN25V59I 003	Auftrags-Nr.: Order no.:		168582360	Page 1 of 13 Seite 1 von 13	
Kunden-Referenz-Nr.: Client reference no.:		N/A	Auftragsdatum: Order date:		2025-11-04		
Auftraggeber: Client:		Harman International Industries, Incorporated 8500 Balboa Blvd, Northridge, California, 91329, United States					
Prüfgegenstand: Test item:		HEADSET CHARGING CASE					
Bezeichnung / Typ-Nr.: Identification / Type no.:		LIVE BUDS 4C (Trademark: JBL)					
Auftrags-Inhalt: Order content:		Type test					
Prüfgrundlage: Test specification:		Article 2 Section 1 Item 19, Radio Equipment Regulation: Article 49-20 MIC notice No. 88 Appendix No. 43 (Test method)					
Wareneingangsdatum: Date of sample receipt:		2025-11-04					
Prüfmuster-Nr.: Test sample no.:		A004127462					
Prüfzeitraum: Testing period:		2025-11-04 – 2025-11-24					
Ort der Prüfung: Place of testing:		TÜV Rheinland (Shenzhen) Co., Ltd.					
Prüflaboratorium: Testing laboratory:		TÜV Rheinland (Shenzhen) Co., Ltd.					
Prüfergebnis*: Test result*:		Pass					
geprüft von: tested by:				genehmigt von: authorized by:			
Datum: Date:		2026-01-06		Ausstellungsdatum: Issue date:		2026-01-06	
Position / Stellung:		Project Manager		Position / Stellung:		Authorizer	
Sonstiges / Other:		This test report is for Bluetooth Low Energy function.					
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged					
* Legende: * Legend:		P(ass) = entspricht o.g. Prüfgrundlage(n) P(ass) = passed a.m. test specification(s) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) F(ail) = failed a.m. test specification(s) N/A = nicht anwendbar N/A = not applicable N/T = nicht getestet N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.							

Prüfbericht-Nr.: CN25V59I 003
Test report no.:

Page 2 of 13
Seite 2 von 13

Remarks
Anmerkungen

- | | |
|---|--|
| 1 | <p>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</p> <p><i>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</i></p> <p><i>Detaillierte Informationen bezüglich Prüfbedingungen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</i></p> |
| 2 | <p>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</p> <p><i>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</i></p> |
| 3 | <p>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</p> <p><i>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</i></p> |
| 4 | <p>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</p> <p><i>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</i></p> |

Contents

1	TEST SITES.....	4
1.1	TEST FACILITIES.....	4
1.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	4
1.3	UNCERTAINTY OF MEASUREMENT.....	4
2	GENERAL PRODUCT INFORMATION.....	5
2.1	PRODUCT FUNCTION AND INTENDED USE.....	5
2.2	RATINGS AND SYSTEM DETAILS.....	5
2.3	TEST CONDITIONS.....	6
2.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	6
2.5	ANTENNA SPECIFICATIONS.....	6
2.5.1	ANTENNA GAIN.....	6
2.5.2	ANTENNA PATTERN.....	6
3	TEST RESULTS.....	7
3.1	FREQUENCY TOLERANCE MEASUREMENT.....	7
3.1.1	LIMITS OF FREQUENCY TOLERANCE MEASUREMENT.....	7
3.1.2	TEST SETUP.....	7
3.1.3	TEST RESULTS.....	7
3.2	OCCUPIED BANDWIDTH MEASUREMENT (99% POWER BANDWIDTH).....	8
3.2.1	LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT.....	8
3.2.2	TEST SETUP.....	8
3.2.3	TEST RESULTS.....	8
3.3	ANTENNA POWER MEASUREMENT.....	9
3.3.1	LIMITS OF ANTENNA POWER.....	9
3.3.2	TEST SETUP.....	9
3.3.3	TEST RESULTS.....	9
3.4	SPURIOUS EMISSIONS FOR TRANSMITTER MEASUREMENT.....	10
3.4.1	LIMITS OF SPURIOUS EMISSIONS.....	10
3.4.2	TEST SETUP.....	10
3.4.3	TEST RESULT.....	10
3.5	SPURIOUS EMISSIONS FOR RECEIVER.....	11
3.5.1	LIMITS OF SPURIOUS EMISSIONS FOR RECEIVER.....	11
3.5.2	TEST SETUP.....	11
3.5.3	TEST RESULT.....	11
3.6	INTERFERENCE PREVENTION FUNCTION.....	12
3.6.1	LIMITS OF Interference Prevention Function.....	12
3.6.2	TEST SETUP.....	12
3.6.3	TEST RESULTS.....	12
4	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	13

Prüfbericht-Nr.: CN25V59I 003
Test report no.:

Seite 4 von 13
Page 4 of 13

1 TEST SITES

1.1 TEST FACILITIES

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China

1.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Table 1: List of Test and Measurement Equipment

TÜV Rheinland (Shenzhen) Co., Ltd.

Equipment	Manufacturer	Model	Serial No.	Calibration Company	Date calibrated	Cal. until	Note (Radio Law)
Wireless Connectivity Tester	R&S	CMW270	101375	GRGTEST	23.09.2025	22.09.2026	24-2-4-2-(ha)
EXA Signal Analyzer	Keysight	N9010B	MY60241175	GRGTEST	23.09.2025	22.09.2026	24-2-4-2-(ha)
Power Meter	R&S	NRP2	107105	GRGTEST	30.10.2025	29.10.2026	24-2-4-2-(ha)
Power Sensor	R&S	NRP-Z81	105677	GRGTEST	23.09.2025	22.09.2026	24-2-4-2-(ha)
DC Power Supply	Keysight	E3642A	MY61276100	GRGTEST	23.09.2025	22.09.2026	24-2-4-2-(ha)
Digital Multi Meter	FLUKE	F15B	44350845WS	GRGTEST	23.09.2025	22.09.2026	24-2-4-2-(ha)

1.3 UNCERTAINTY OF MEASUREMENT

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

ITEM	UNCERTAINTY
Occupied Bandwidth	206.50 Hz
Spurious emissions	$\pm 3.93\text{dB}$
Output power density	1.37dB
Out of band radiated power	2.52 dB
Frequency Tolerance	0.104 ppm

Prüfbericht-Nr.: CN25V59I 003
Test report no.:

Seite 5 von 13
Page 5 of 13

2 GENERAL PRODUCT INFORMATION

2.1 PRODUCT FUNCTION AND INTENDED USE

The product is a Charging case, which supports Bluetooth LE & Wireless Charging (Rx only) technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

2.2 RATINGS AND SYSTEM DETAILS

Table 2: Technical Specification of EUT

General Information of EUT	Description
Kind of Equipment:	HEADSET CHARGING CASE
Type Designation:	LIVE BUDS 4C
Trademark:	JBL
Operating Voltage	Input: 5Vdc, 1A; Output: 5Vdc, 130mA*2, Li-ion battery: 3.87Vdc, 590mAh, 2.283Wh
Extreme Temperature Range	0°C to +45°C
Technical Specification of Bluetooth Low Energy	
Operating Frequency band	2402 – 2480 MHz for data rate 1Mbps 2404 – 2478 MHz for data rate 2Mbps
Channel Number	40 channels for data rate 1Mbps 37 channels for data rate 2Mbps Note: 2402MHz/2426MHz/2480MHz will be disable via software for data rate 2Mbps.
Channel separation	2MHz
Data rate	1Mbps, 2Mbps
Modulation	GFSK
Antenna Type	Integral antenna
Antenna Gain	-0.1 dBi (Provided by the Client)

Table 3: RF Channel and Frequency, Bluetooth Low Energy

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Prüfbericht-Nr.: CN25V59I 003
Test report no.:

Seite 6 von 13
Page 6 of 13

2.3 TEST CONDITIONS

Test conditions	Voltage (Vac)
V_{normal}	3.87
V_{max}	4.26
V_{min}	3.48

Test conditions	Unit
Temperature	20.9 deg °C
Humidity	46.6 %

2.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A

2.5 ANTENNA SPECIFICATIONS

2.5.1 ANTENNA GAIN

Ant. Type	Connector Type	Highest Peak Gain (dBi) 2.4GHz ~ 2.5GHz
Integral antenna	N/A	-0.1 dBi

2.5.2 ANTENNA PATTERN

Please refer to the attached file (Antenna report).

Prüfbericht-Nr.: CN25V59I 003
Test report no.:

Seite 7 von 13
Page 7 of 13

3 TEST RESULTS

3.1 FREQUENCY TOLERANCE MEASUREMENT

3.1.1 LIMITS OF FREQUENCY TOLERANCE MEASUREMENT

Tolerance of frequency shall be +/- 50ppm

3.1.2 TEST SETUP



3.1.3 TEST RESULTS

For the measurement records, refer to the appendix A.

Prüfbericht-Nr.: CN25V59I 003
Test report no.:


Seite 8 von 13
Page 8 of 13

3.2 OCCUPIED BANDWIDTH MEASUREMENT (99% POWER BANDWIDTH)

3.2.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

ITEM	LIMIT	REMARK
Occupied bandwidth	<26MHz	For 802.11b, g & 802.11n (HT20)
Occupied bandwidth	<26MHz	For BT-LE (GFSK)

3.2.2 TEST SETUP



3.2.3 TEST RESULTS

For the measurement records, refer to the appendix A.

Prüfbericht-Nr.: **CN25V59I 003**
Test report no.:

Seite 9 von 13
Page 9 of 13

3.3 ANTENNA POWER MEASUREMENT


3.3.1 LIMITS OF ANTENNA POWER

Modulation system	Frequency band used	Antenna power (max.)	EIRP (max)	
			Omni-directional case	Directional case
DS.OFDM (Narrow-Band)	2,400 – 2,4835 MHz	10mW/MHz	12.14 dBm/MHz (16.367 mW/MHz)	22.14 dBm/MHz (163.682 mW/MHz)
OFDM (Wide-Band)	2,400 – 2,4835 MHz	5mW/MHz	9.13dBm/MHz (8.185mW/MHz)	19.13dBm/MHz (81.846mW/MHz)
DTS	2,400 – 2,4835 MHz	10mW	12.14 dBm 16.367 mW	22.14 dBm 163.682 mW

Tolerance of antenna power shall be +20% (upper value).

According article 49.20 f(2) The angular width of the principal radiation in the horizontal and vertical planes of the transmitting antenna shall not exceed the value obtained by the following expression. $360/A$ degree
A represents the value determined by dividing an equivalent isotropically radiated power by the value obtained by applying an antenna power with the mean power of 10 mW to the transmitting antenna with its absolute gain being 2.14 dB, and shall be 1 when it is lower than 1

3.3.2 TEST SETUP

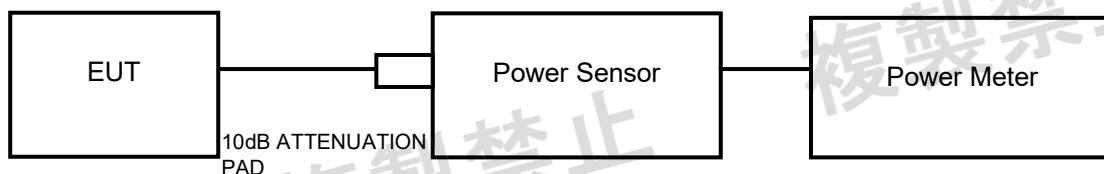

3.3.3 TEST RESULTS

For the measurement records, refer to the appendix A.

Prüfbericht-Nr.: CN25V59I 003
Test report no.:


Seite 10 von 13
Page 10 of 13

3.4 SPURIOUS EMISSIONS FOR TRANSMITTER MEASUREMENT

3.4.1 LIMITS OF SPURIOUS EMISSIONS

FREQUENCIES (MHz)	LIMIT
Operating frequency 2400 to 2483.5MHz	
30.0MHz to 2387MHz	$\leq 2.5\mu\text{W}/\text{MHz}$
2387.0MHz to 2400.0MHz	$\leq 25\mu\text{W}/\text{MHz}$
2483.5MHz to 2496.5MHz	$\leq 25\mu\text{W}/\text{MHz}$
2496.5MHz to 12500.0MHz	$\leq 2.5\mu\text{W}/\text{MHz}$

3.4.2 TEST SETUP



3.4.3 TEST RESULT

For the measurement records, refer to the appendix A.

Prüfbericht-Nr.: CN25V59I 003
Test report no.:

Seite 11 von 13
Page 11 of 13

3.5 SPURIOUS EMISSIONS FOR RECEIVER

3.5.1 LIMITS OF SPURIOUS EMISSIONS FOR RECEIVER

FREQUENCIES (MHz)	LIMIT
Below 1GHz	$\leq 4\text{nW}$ (-54dBm)
Above 1GHz	$\leq 20\text{nW}$ (-47dBm)

3.5.2 TEST SETUP



3.5.3 TEST RESULT

For the measurement records, refer to the appendix A.

Prüfbericht-Nr.:

CN25V59I 003

Test report no.:

Seite 12 von 13


Page 12 of 13

3.6 INTERFERENCE PREVENTION FUNCTION

3.6.1 LIMITS OF Interference Prevention Function

N/A


3.6.2 TEST SETUP

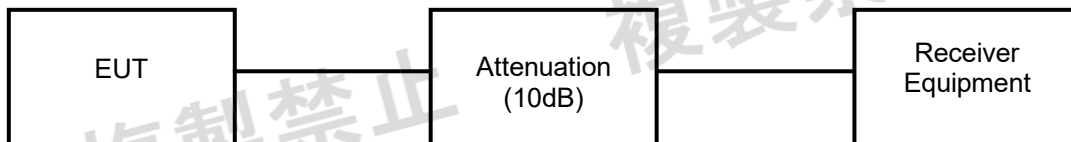

3.6.3 TEST RESULTS

ENVIRONMENTAL CONDITIONS	20.9 deg.C, 43.7 RH
LINK MODE	TEST RESULT
BT-LE	PASS


EUT connected to CMW270, MAC address as below:

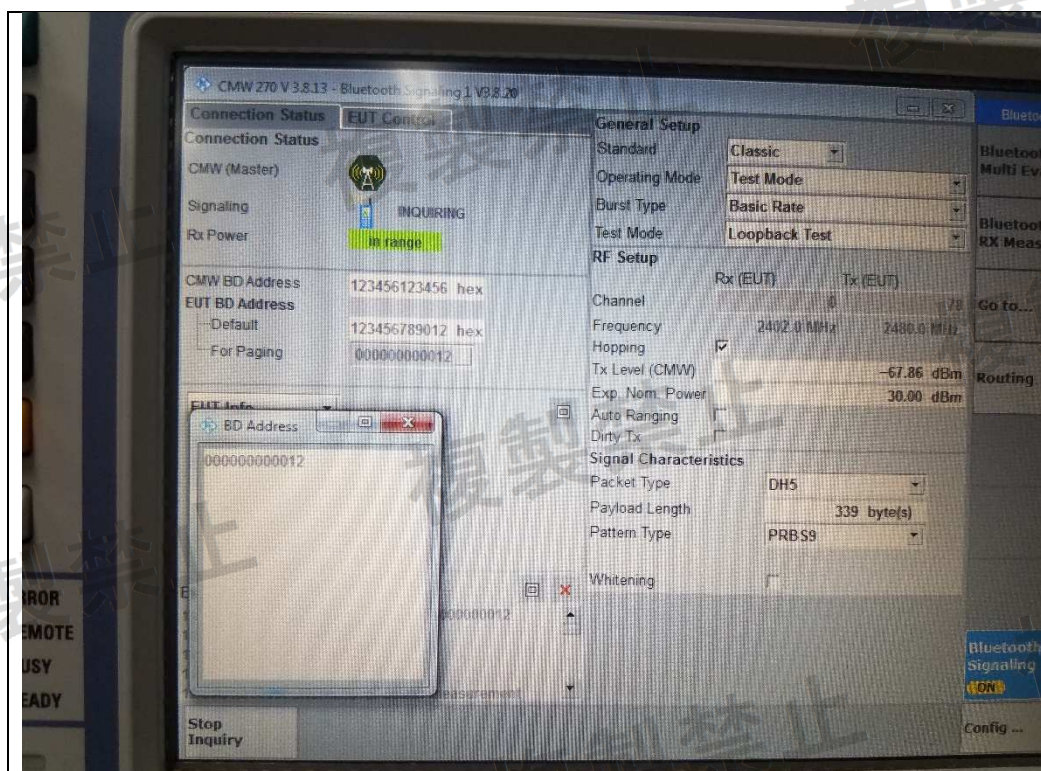

Prüfbericht-Nr.: CN25V59I 003
Test report no.:

Seite 13 von 13
Page 13 of 13

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

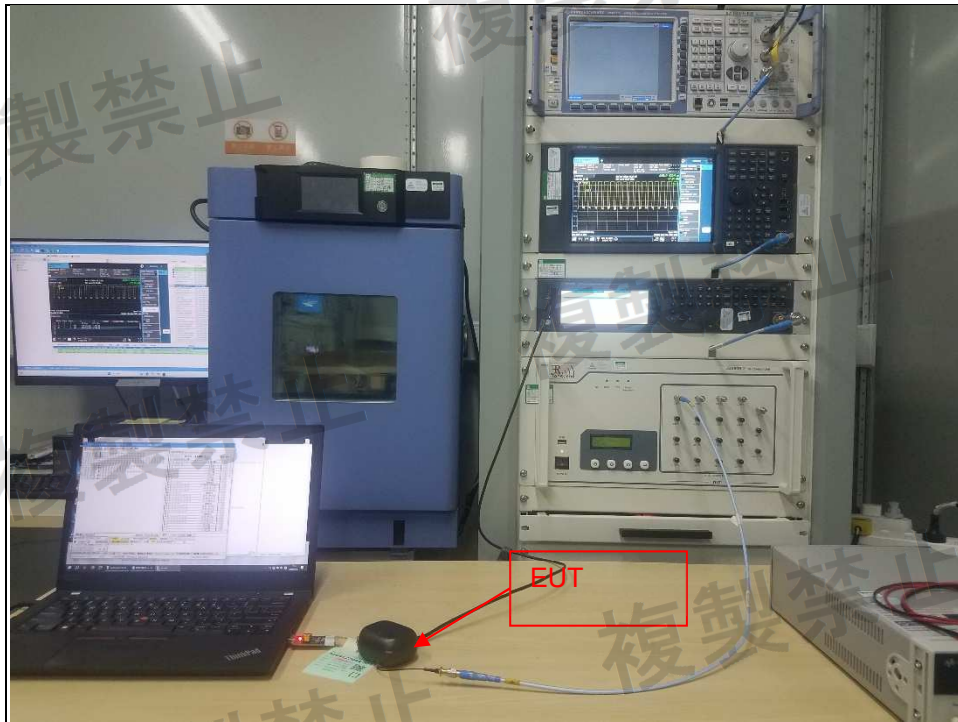

---END---

Appendix A

Test results of Bluetooth Low Energy

1	APPENDIX A.1 : FREQUENCY TOLERANCE	2
2	APPENDIX A.2 : OCCUPIED BANDWIDTH	6
3	APPENDIX A.3 : ANTENNA POWER	13
4	APPENDIX A.4: SPURIOUS EMISSIONS FOR TRANSMITTER	15
5	APPENDIX A.5: SPURIOUS EMISSIONS FOR RECEIVER.....	53



1 Appendix A.1 : FREQUENCY TOLERANCE

Note:

NTNV means: Normal Temperature & Normal Voltage, NTHV means: Normal Temperature & Max. Voltage,

NTLV means: Normal Temperature & Min. Voltage.

TestCondition	TestMode	Antenna	Freq(MHz)	Result[ppm]	Limit[ppm]	Verdict
NTNV	CW	Ant1	2402	-7.49376	±50	PASS
			2440	-4.91803	±50	PASS
			2480	-1.81452	±50	PASS
NTLV	CW	Ant1	2402	-9.99167	±50	PASS
			2440	-3.07377	±50	PASS
			2480	4.23387	±50	PASS
NTHV	CW	Ant1	2402	-14.98751	±50	PASS
			2440	-2.45902	±50	PASS
			2480	-8.46774	±50	PASS

Note:

BLE 1M and BLE 2M were tested, only the worse case was recorded in the report.









2 Appendix A.2 : OCCUPIED BANDWIDTH


TestCondition	TestMode	Antenna	Freq(MHz)	Result [MHz]	Limit [MHz]	Verdict
NTNV	BLE_1M	Ant1	2402	1.258	≤26	PASS
			2440	1.251	≤26	PASS
			2480	1.256	≤26	PASS
	BLE_2M	Ant1	2404	2.170	≤26	PASS
			2440	2.177	≤26	PASS
			2478	2.173	≤26	PASS
NTLV	BLE_1M	Ant1	2402	1.257	≤26	PASS
			2440	1.253	≤26	PASS
			2480	1.255	≤26	PASS
	BLE_2M	Ant1	2404	2.174	≤26	PASS
			2440	2.171	≤26	PASS
			2478	2.171	≤26	PASS
NTHV	BLE_1M	Ant1	2402	1.255	≤26	PASS
			2440	1.257	≤26	PASS
			2480	1.257	≤26	PASS
	BLE_2M	Ant1	2404	2.168	≤26	PASS
			2440	2.167	≤26	PASS
			2478	2.176	≤26	PASS

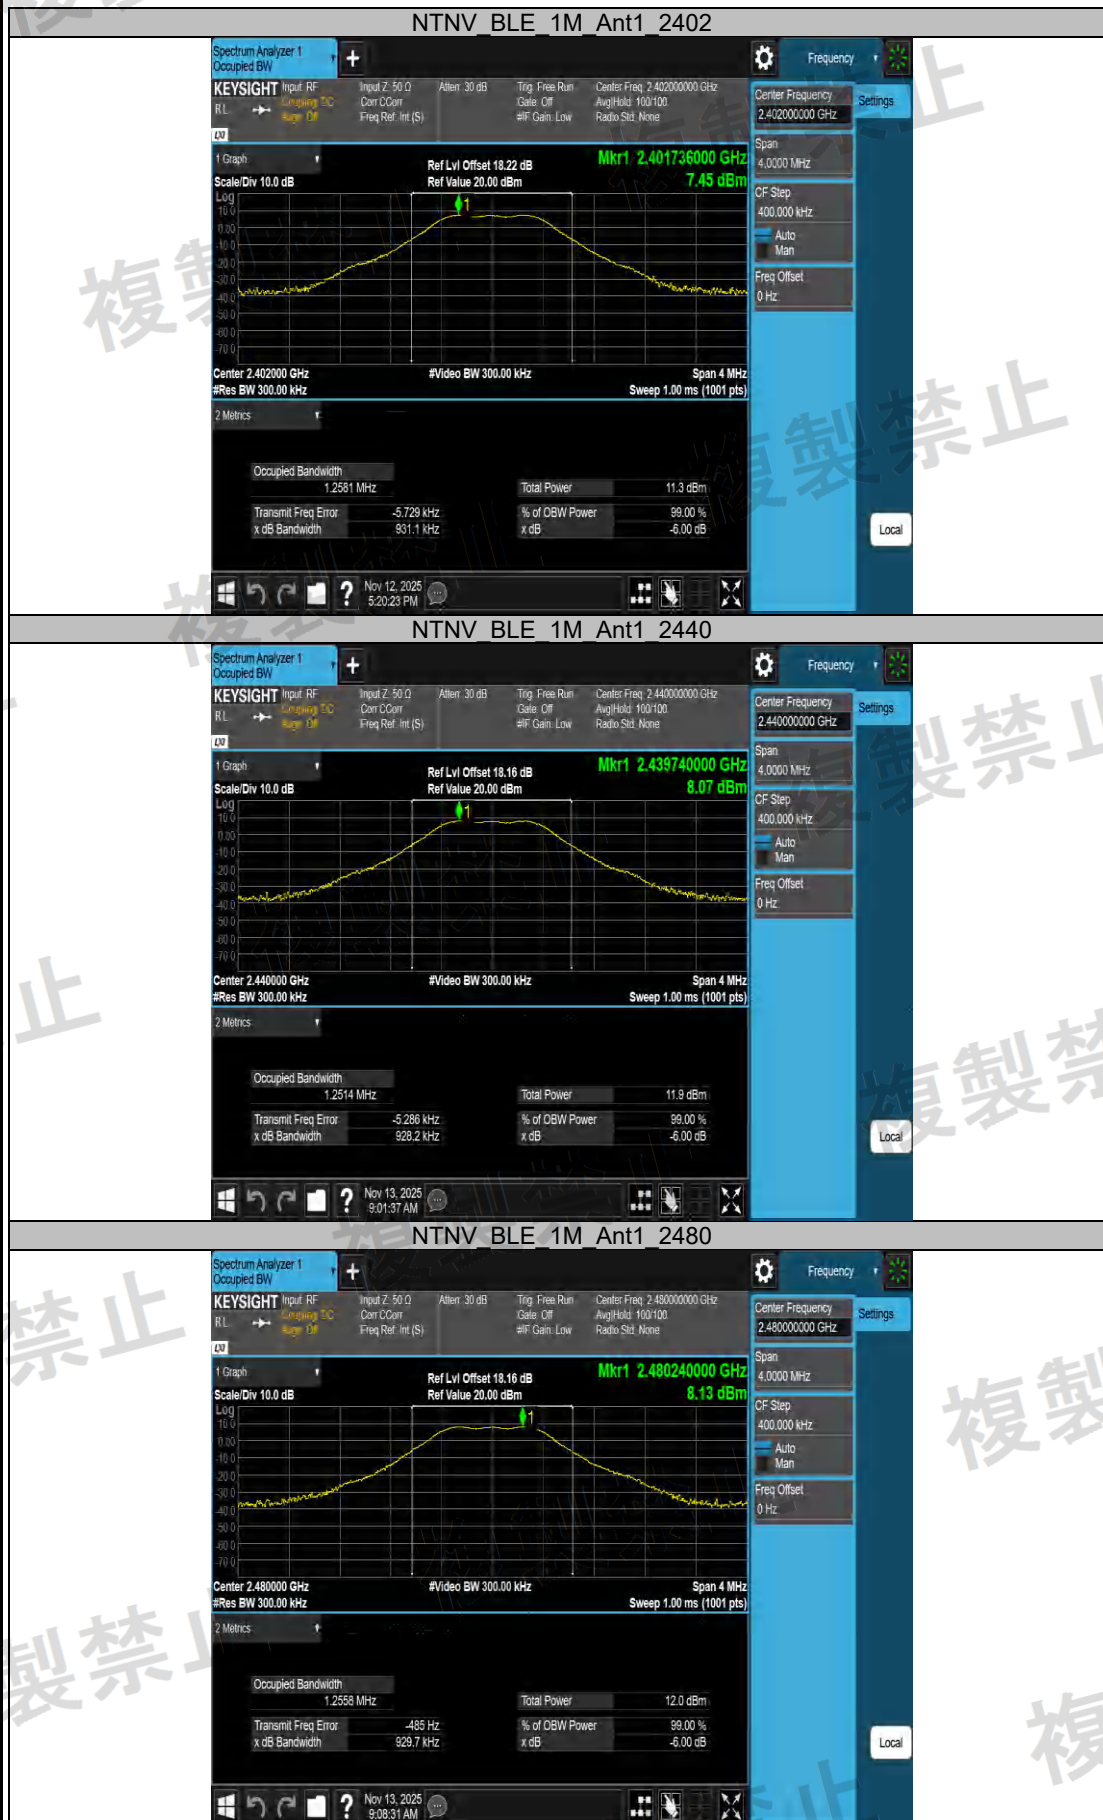



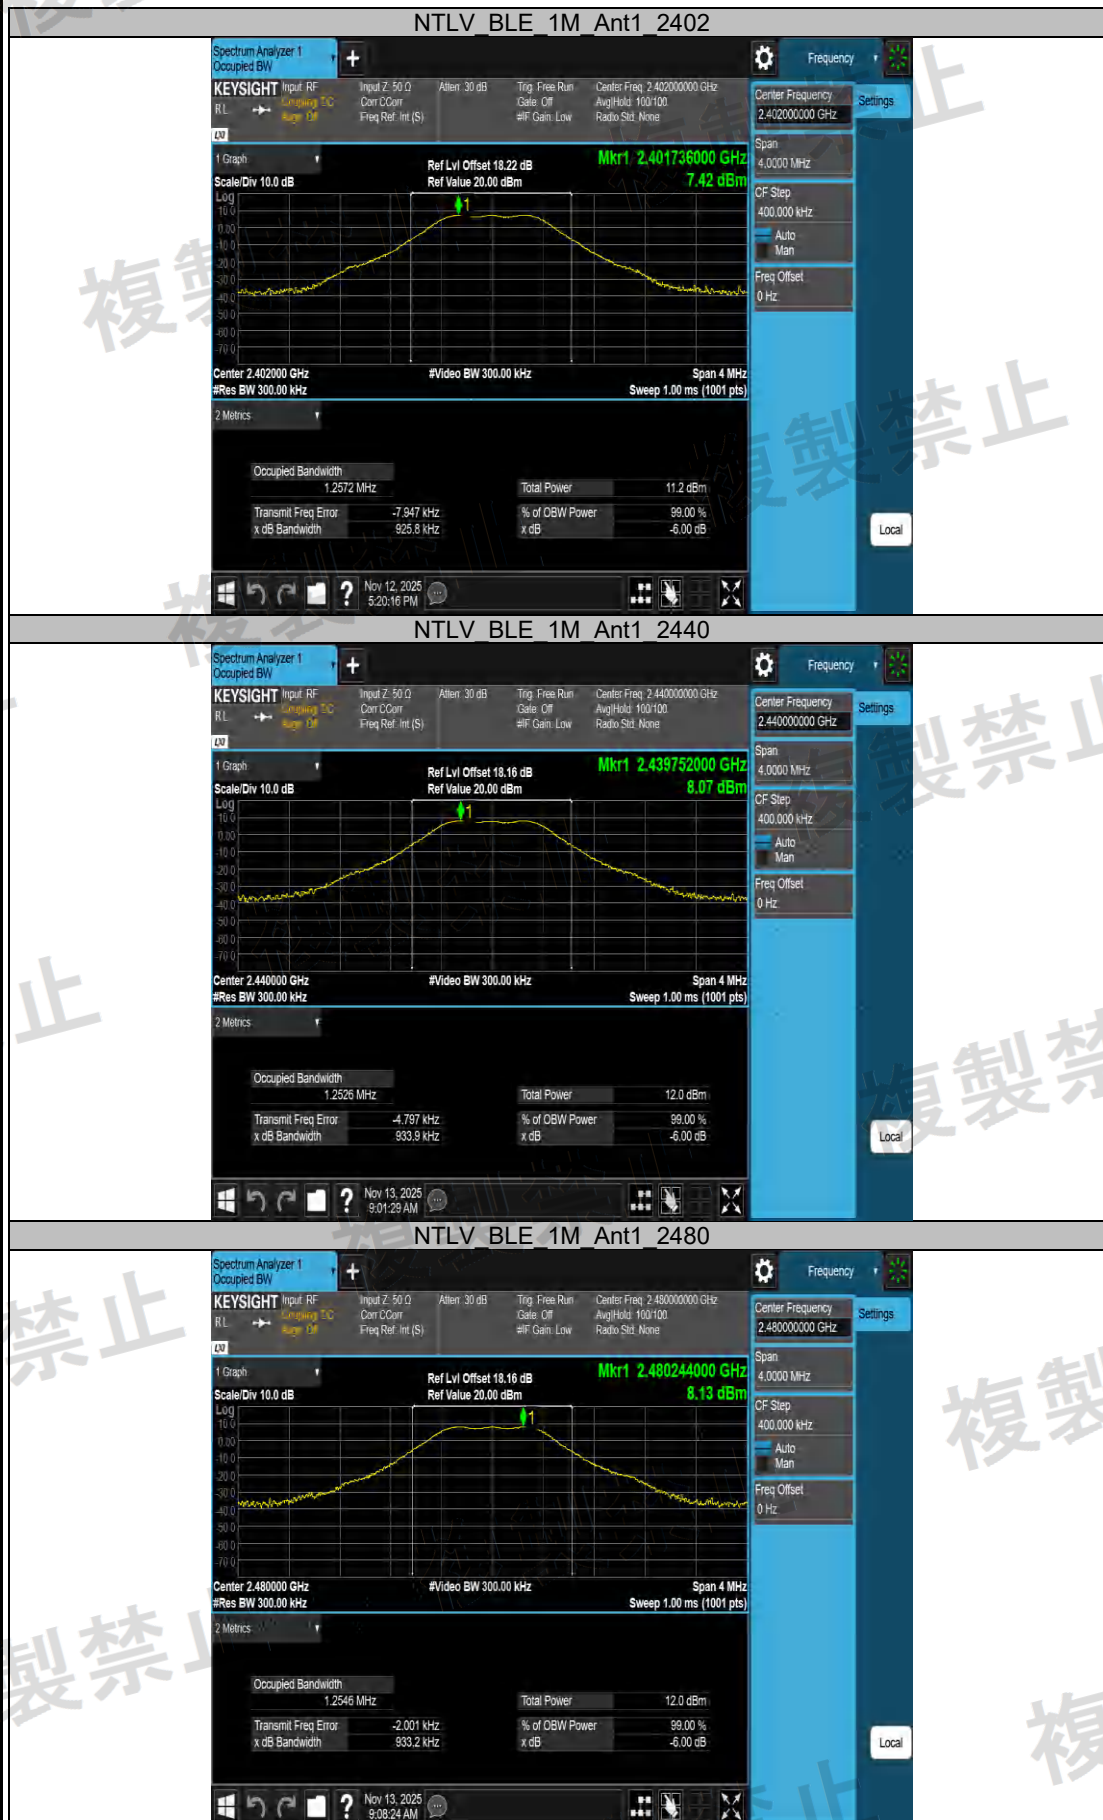



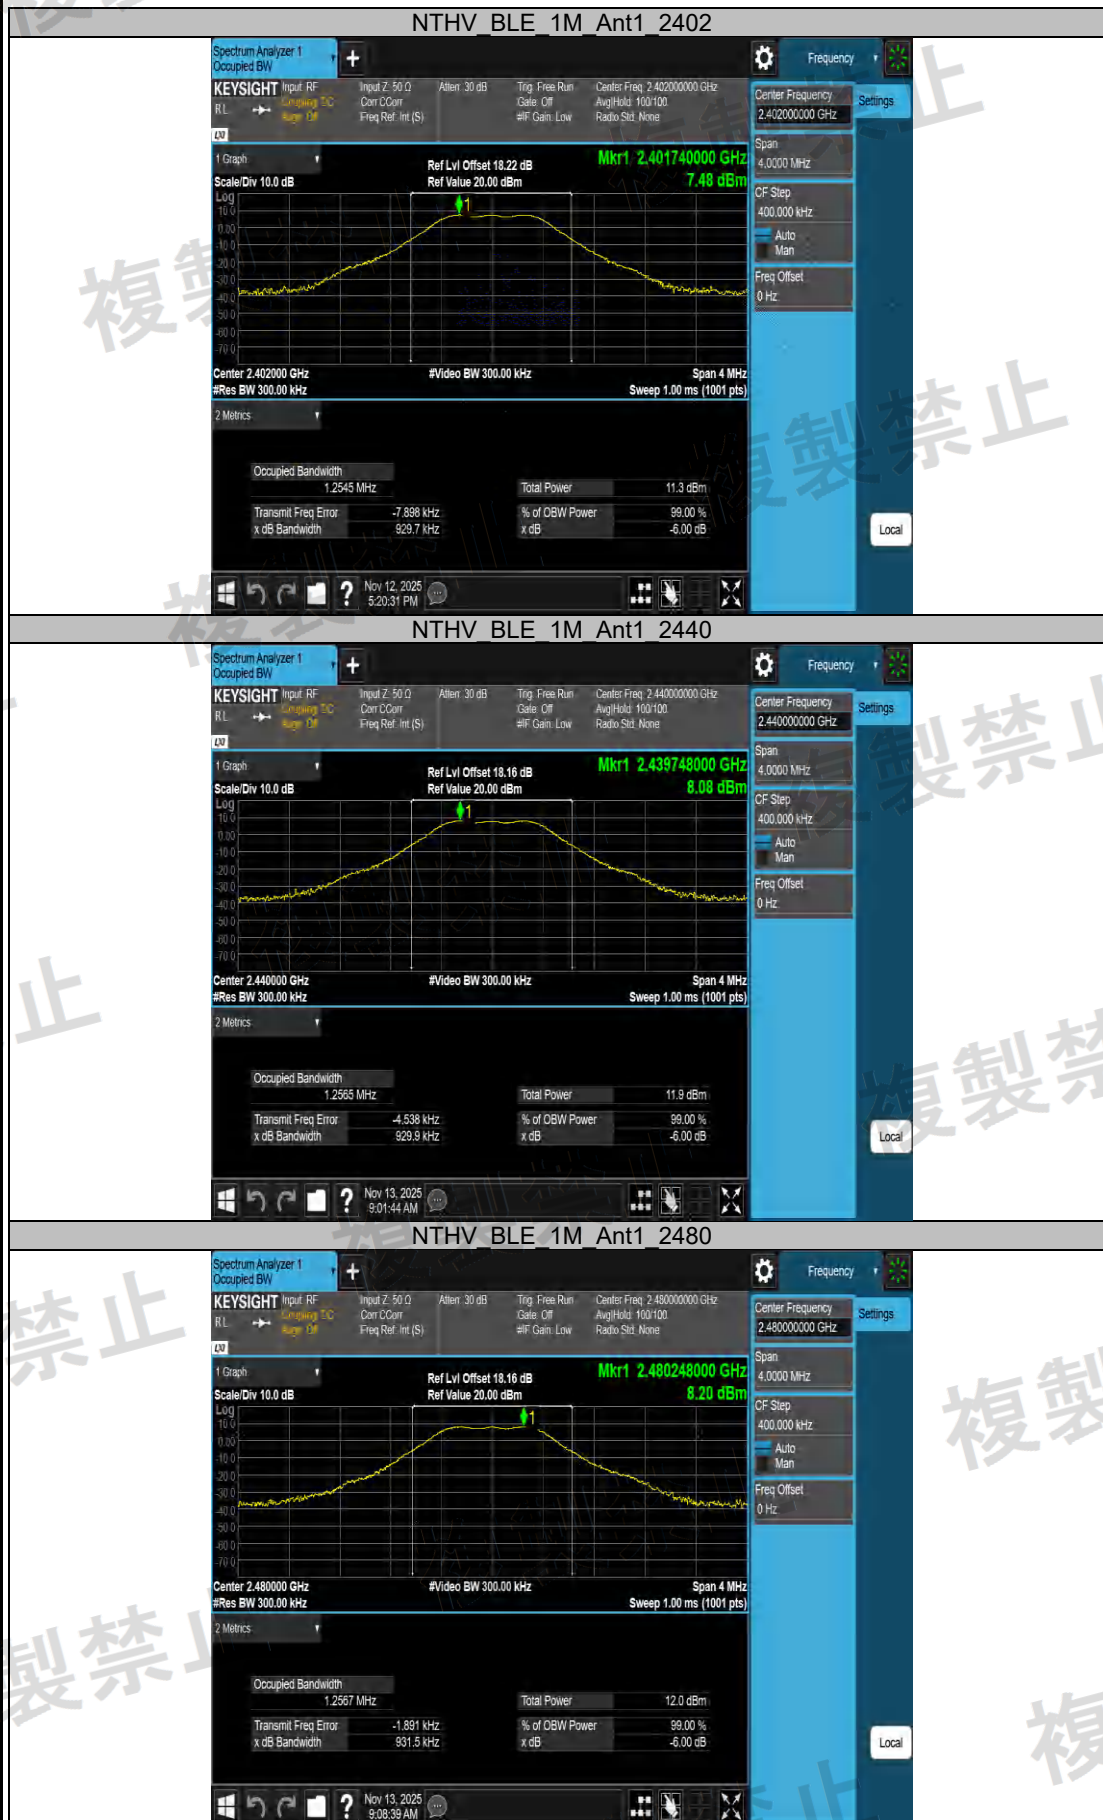



3 Appendix A.3 : ANTENNA POWER

Antenna Power							
TestCondition	TestMode	Antenna	Freq(MHz)	Result(dBm)	Result(mW)	Limit(mW)	Verdict
NTNV	BLE_1M	Ant1	2402	8.57	7.1945	≤10	PASS
			2440	8.68	7.3790	≤10	PASS
			2480	8.54	7.1450	≤10	PASS
	BLE_2M	Ant1	2404	8.55	7.1614	≤10	PASS
			2440	8.79	7.5683	≤10	PASS
			2478	8.56	7.1779	≤10	PASS
NTLV	BLE_1M	Ant1	2402	8.52	7.1121	≤10	PASS
			2440	8.61	7.2611	≤10	PASS
			2480	8.53	7.1285	≤10	PASS
	BLE_2M	Ant1	2404	8.56	7.1779	≤10	PASS
			2440	8.74	7.4817	≤10	PASS
			2478	8.55	7.1614	≤10	PASS
NTHV	BLE_1M	Ant1	2402	8.55	7.1614	≤10	PASS
			2440	8.64	7.3114	≤10	PASS
			2480	8.52	7.1121	≤10	PASS
	BLE_2M	Ant1	2404	8.51	7.0958	≤10	PASS
			2440	8.76	7.5162	≤10	PASS
			2478	8.55	7.1614	≤10	PASS

Tolerance								
Test Condition	Test Mode	Antenna	Freq(MHz)	Power (mW)	RatedPower (mW)	Result (%)	Limit (%)	Verdict
NTNV	BLE_1M	Ant1	2402	7.1945	9	-20.06	+20	PASS
			2440	7.3790	9	-18.01	+20	PASS
			2480	7.1450	9	-20.61	+20	PASS
	BLE_2M	Ant1	2404	7.1614	9	-20.43	+20	PASS
			2440	7.5683	9	-15.91	+20	PASS
			2478	7.1779	9	-20.25	+20	PASS
NTLV	BLE_1M	Ant1	2402	7.1121	9	-20.98	+20	PASS
			2440	7.2611	9	-19.32	+20	PASS
			2480	7.1285	9	-20.79	+20	PASS
	BLE_2M	Ant1	2404	7.1779	9	-20.25	+20	PASS
			2440	7.4817	9	-16.87	+20	PASS
			2478	7.1614	9	-20.43	+20	PASS
NTHV	BLE_1M	Ant1	2402	7.1614	9	-20.43	+20	PASS
			2440	7.3114	9	-18.76	+20	PASS
			2480	7.1121	9	-20.98	+20	PASS
	BLE_2M	Ant1	2404	7.0958	9	-21.16	+20	PASS
			2440	7.5162	9	-16.49	+20	PASS
			2478	7.1614	9	-20.43	+20	PASS

EIRP							
TestCondition	TestMode	Antenna	Freq(MHz)	Power (dBm)	EIRP(dBm)	Limit(dBm)	Verdict
NTNV	BLE_1M	Ant1	2402	8.58	8.48	≤12.14	PASS
			2440	8.47	8.37	≤12.14	PASS
			2480	9.03	8.93	≤12.14	PASS
	BLE_2M	Ant1	2404	8.65	8.55	≤12.14	PASS
			2440	8.53	8.43	≤12.14	PASS
			2478	9.00	8.9	≤12.14	PASS
NTLV	BLE_1M	Ant1	2402	8.59	8.49	≤12.14	PASS
			2440	8.48	8.38	≤12.14	PASS
			2480	9.05	8.95	≤12.14	PASS
	BLE_2M	Ant1	2404	8.65	8.55	≤12.14	PASS
			2440	8.51	8.41	≤12.14	PASS
			2478	8.94	8.84	≤12.14	PASS
NTHV	BLE_1M	Ant1	2402	8.59	8.49	≤12.14	PASS
			2440	8.48	8.38	≤12.14	PASS
			2480	9.01	8.91	≤12.14	PASS
	BLE_2M	Ant1	2404	8.65	8.55	≤12.14	PASS
			2440	8.51	8.41	≤12.14	PASS
			2478	8.97	8.87	≤12.14	PASS



4 Appendix A.4: SPURIOUS EMISSIONS FOR TRANSMITTER

TestCondition	TestMode	Antenna	Freq(MHz)	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [μW]	Limit [μW]	Verdict
NTNV	BLE_1M	Ant1	2402	30~500	181.81	-47.48	≤-26	0.01786	≤2.5	PASS
				500~1000	593.88	-55.62	≤-26	0.00274	≤2.5	PASS
				1000~2387	2349.55	-50.31	≤-26	0.00931	≤2.5	PASS
				2387~2400	2399.99	-25.55	≤-16	2.78612	≤25	PASS
				2483.5~2496.5	2495.82	-50.56	≤-16	0.00879	≤25	PASS
				2496.5~13000	2570.55	-50.23	≤-26	0.00948	≤2.5	PASS
			2440	30~500	194.03	-48.23	≤-26	0.01503	≤2.5	PASS
				500~1000	593.25	-55.95	≤-26	0.00254	≤2.5	PASS
				1000~2387	2387.00	-52.12	≤-26	0.00614	≤2.5	PASS
				2387~2400	2388.09	-48.17	≤-16	0.01524	≤25	PASS
				2483.5~2496.5	2492.00	-47.41	≤-16	0.01816	≤25	PASS
				2496.5~13000	2647.23	-49.98	≤-26	0.01005	≤2.5	PASS
			2480	30~500	193.68	-46.91	≤-26	0.02037	≤2.5	PASS
				500~1000	588.75	-55.63	≤-26	0.00274	≤2.5	PASS
				1000~2387	2015.28	-52.83	≤-26	0.00521	≤2.5	PASS
				2387~2400	2398.32	-51.98	≤-16	0.00634	≤25	PASS
				2483.5~2496.5	2483.55	-40.55	≤-16	0.08810	≤25	PASS
				2496.5~13000	4959.57	-49.56	≤-26	0.01107	≤2.5	PASS
	BLE_2M	Ant1	2404	30~500	193.21	-47.97	≤-26	0.01596	≤2.5	PASS
				500~1000	561.13	-56.10	≤-26	0.00245	≤2.5	PASS
				1000~2387	2351.63	-49.95	≤-26	0.01012	≤2.5	PASS
				2387~2400	2400.00	-42.31	≤-16	0.05875	≤25	PASS
				2483.5~2496.5	2496.11	-50.60	≤-16	0.00871	≤25	PASS
				2496.5~13000	2610.46	-50.97	≤-26	0.00800	≤2.5	PASS
			2440	30~500	188.51	-47.57	≤-26	0.01750	≤2.5	PASS
				500~1000	732.13	-56.16	≤-26	0.00242	≤2.5	PASS
				1000~2387	2387.00	-50.16	≤-26	0.00964	≤2.5	PASS
				2387~2400	2388.32	-47.83	≤-16	0.01648	≤25	PASS
				2483.5~2496.5	2491.81	-48.01	≤-16	0.01581	≤25	PASS
				2496.5~13000	2646.70	-50.32	≤-26	0.00929	≤2.5	PASS
			2478	30~500	184.98	-47.65	≤-26	0.01718	≤2.5	PASS
				500~1000	940.25	-56.10	≤-26	0.00245	≤2.5	PASS
				1000~2387	2098.85	-53.14	≤-26	0.00485	≤2.5	PASS
				2387~2400	2396.78	-52.64	≤-16	0.00545	≤25	PASS
				2483.5~2496.5	2483.59	-43.21	≤-16	0.04775	≤25	PASS
				2496.5~13000	4956.42	-50.32	≤-26	0.00929	≤2.5	PASS
NTLV	BLE_1M	Ant1	2402	30~500	190.04	-47.68	≤-26	0.01706	≤2.5	PASS
				500~1000	962.00	-55.98	≤-26	0.00252	≤2.5	PASS
				1000~2387	2349.90	-50.35	≤-26	0.00923	≤2.5	PASS
				2387~2400	2400.00	-25.63	≤-16	2.73527	≤25	PASS
				2483.5~2496.5	2491.11	-50.65	≤-16	0.00861	≤25	PASS
				2496.5~13000	2609.94	-50.31	≤-26	0.00931	≤2.5	PASS
			2440	30~500	182.52	-47.73	≤-26	0.01687	≤2.5	PASS
				500~1000	517.25	-55.95	≤-26	0.00254	≤2.5	PASS
				1000~2387	2284.71	-51.37	≤-26	0.00729	≤2.5	PASS
				2387~2400	2387.75	-48.01	≤-16	0.01581	≤25	PASS
				2483.5~2496.5	2492.31	-47.75	≤-16	0.01679	≤25	PASS
				2496.5~13000	2648.28	-49.05	≤-26	0.01245	≤2.5	PASS
			2480	30~500	188.27	-47.67	≤-26	0.01710	≤2.5	PASS
				500~1000	868.88	-55.88	≤-26	0.00258	≤2.5	PASS
				1000~2387	2323.54	-51.91	≤-26	0.00644	≤2.5	PASS
				2387~2400	2396.05	-52.44	≤-16	0.00570	≤25	PASS
				2483.5~2496.5	2483.51	-40.42	≤-16	0.09078	≤25	PASS
				2496.5~13000	2532.21	-50.36	≤-26	0.00920	≤2.5	PASS
	BLE_2M	Ant1	2404	30~500	194.85	-47.33	≤-26	0.01849	≤2.5	PASS
				500~1000	581.63	-55.87	≤-26	0.00259	≤2.5	PASS
				1000~2387	2351.63	-49.52	≤-26	0.01117	≤2.5	PASS
				2387~2400	2399.94	-42.20	≤-16	0.06026	≤25	PASS
				2483.5~2496.5	2496.32	-50.77	≤-16	0.00838	≤25	PASS
				2496.5~13000	2611.51	-50.20	≤-26	0.00955	≤2.5	PASS
			2440	30~500	195.09	-47.83	≤-26	0.01648	≤2.5	PASS
				500~1000	732.25	-56.17	≤-26	0.00242	≤2.5	PASS
				1000~2387	2387.00	-49.68	≤-26	0.01076	≤2.5	PASS
				2387~2400	2388.44	-47.72	≤-16	0.01690	≤25	PASS
				2483.5~2496.5	2491.56	-47.66	≤-16	0.01714	≤25	PASS
				2496.5~13000	2648.28	-50.28	≤-26	0.00938	≤2.5	PASS

Appendix A

CN25V59I 003



TÜVRheinland®

Prüfbericht - Produkte

Test Report - Products

Page 16 of 71

NTHV	BLE_1M	Ant1	2478	30~500	186.51	-47.54	≤-26	0.01762	≤2.5	PASS
				500~1000	849.38	-55.88	≤-26	0.00258	≤2.5	PASS
				1000~2387	2321.46	-52.47	≤-26	0.00566	≤2.5	PASS
				2387~2400	2389.49	-52.32	≤-16	0.00586	≤25	PASS
				2483.5~2496.5	2483.50	-43.46	≤-16	0.04508	≤25	PASS
				2496.5~13000	4954.84	-50.33	≤-26	0.00927	≤2.5	PASS
	BLE_2M	Ant1	2402	30~500	186.28	-47.24	≤-26	0.01888	≤2.5	PASS
				500~1000	603.63	-55.19	≤-26	0.00303	≤2.5	PASS
				1000~2387	2350.24	-48.85	≤-26	0.01303	≤2.5	PASS
				2387~2400	2400.00	-25.92	≤-16	2.55859	≤25	PASS
				2483.5~2496.5	2483.66	-50.73	≤-16	0.00845	≤25	PASS
				2496.5~13000	2610.46	-50.37	≤-26	0.00918	≤2.5	PASS
			2440	30~500	191.92	-48.23	≤-26	0.01503	≤2.5	PASS
				500~1000	544.88	-56.08	≤-26	0.00247	≤2.5	PASS
				1000~2387	2387.00	-52.26	≤-26	0.00594	≤2.5	PASS
				2387~2400	2387.73	-47.76	≤-16	0.01675	≤25	PASS
				2483.5~2496.5	2491.88	-47.61	≤-16	0.01734	≤25	PASS
				2496.5~13000	2660.88	-50.56	≤-26	0.00879	≤2.5	PASS
			2480	30~500	191.33	-48.21	≤-26	0.01510	≤2.5	PASS
				500~1000	814.88	-56.13	≤-26	0.00244	≤2.5	PASS
				1000~2387	2323.54	-52.85	≤-26	0.00519	≤2.5	PASS
				2387~2400	2393.12	-52.19	≤-16	0.00604	≤25	PASS
				2483.5~2496.5	2483.53	-40.39	≤-16	0.09141	≤25	PASS
				2496.5~13000	4960.62	-50.27	≤-26	0.00940	≤2.5	PASS
		Ant1	2404	30~500	202.84	-47.09	≤-26	0.01954	≤2.5	PASS
				500~1000	930.50	-56.11	≤-26	0.00245	≤2.5	PASS
				1000~2387	2352.33	-50.51	≤-26	0.00889	≤2.5	PASS
				2387~2400	2399.99	-41.62	≤-16	0.06887	≤25	PASS
				2483.5~2496.5	2489.76	-50.52	≤-16	0.00887	≤25	PASS
				2496.5~13000	2611.51	-50.66	≤-26	0.00859	≤2.5	PASS
			2440	30~500	176.64	-47.34	≤-26	0.01845	≤2.5	PASS
				500~1000	868.88	-55.95	≤-26	0.00254	≤2.5	PASS
				1000~2387	2387.00	-50.89	≤-26	0.00815	≤2.5	PASS
				2387~2400	2388.54	-48.14	≤-16	0.01535	≤25	PASS
				2483.5~2496.5	2492.29	-47.66	≤-16	0.01714	≤25	PASS
				2496.5~13000	4880.27	-50.15	≤-26	0.00966	≤2.5	PASS
			2478	30~500	179.34	-47.37	≤-26	0.01832	≤2.5	PASS
				500~1000	789.50	-55.78	≤-26	0.00264	≤2.5	PASS
				1000~2387	2321.81	-53.18	≤-26	0.00481	≤2.5	PASS
				2387~2400	2387.31	-52.84	≤-16	0.00520	≤25	PASS
				2483.5~2496.5	2483.53	-43.89	≤-16	0.04083	≤25	PASS
				2496.5~13000	4954.84	-50.14	≤-26	0.00968	≤2.5	PASS













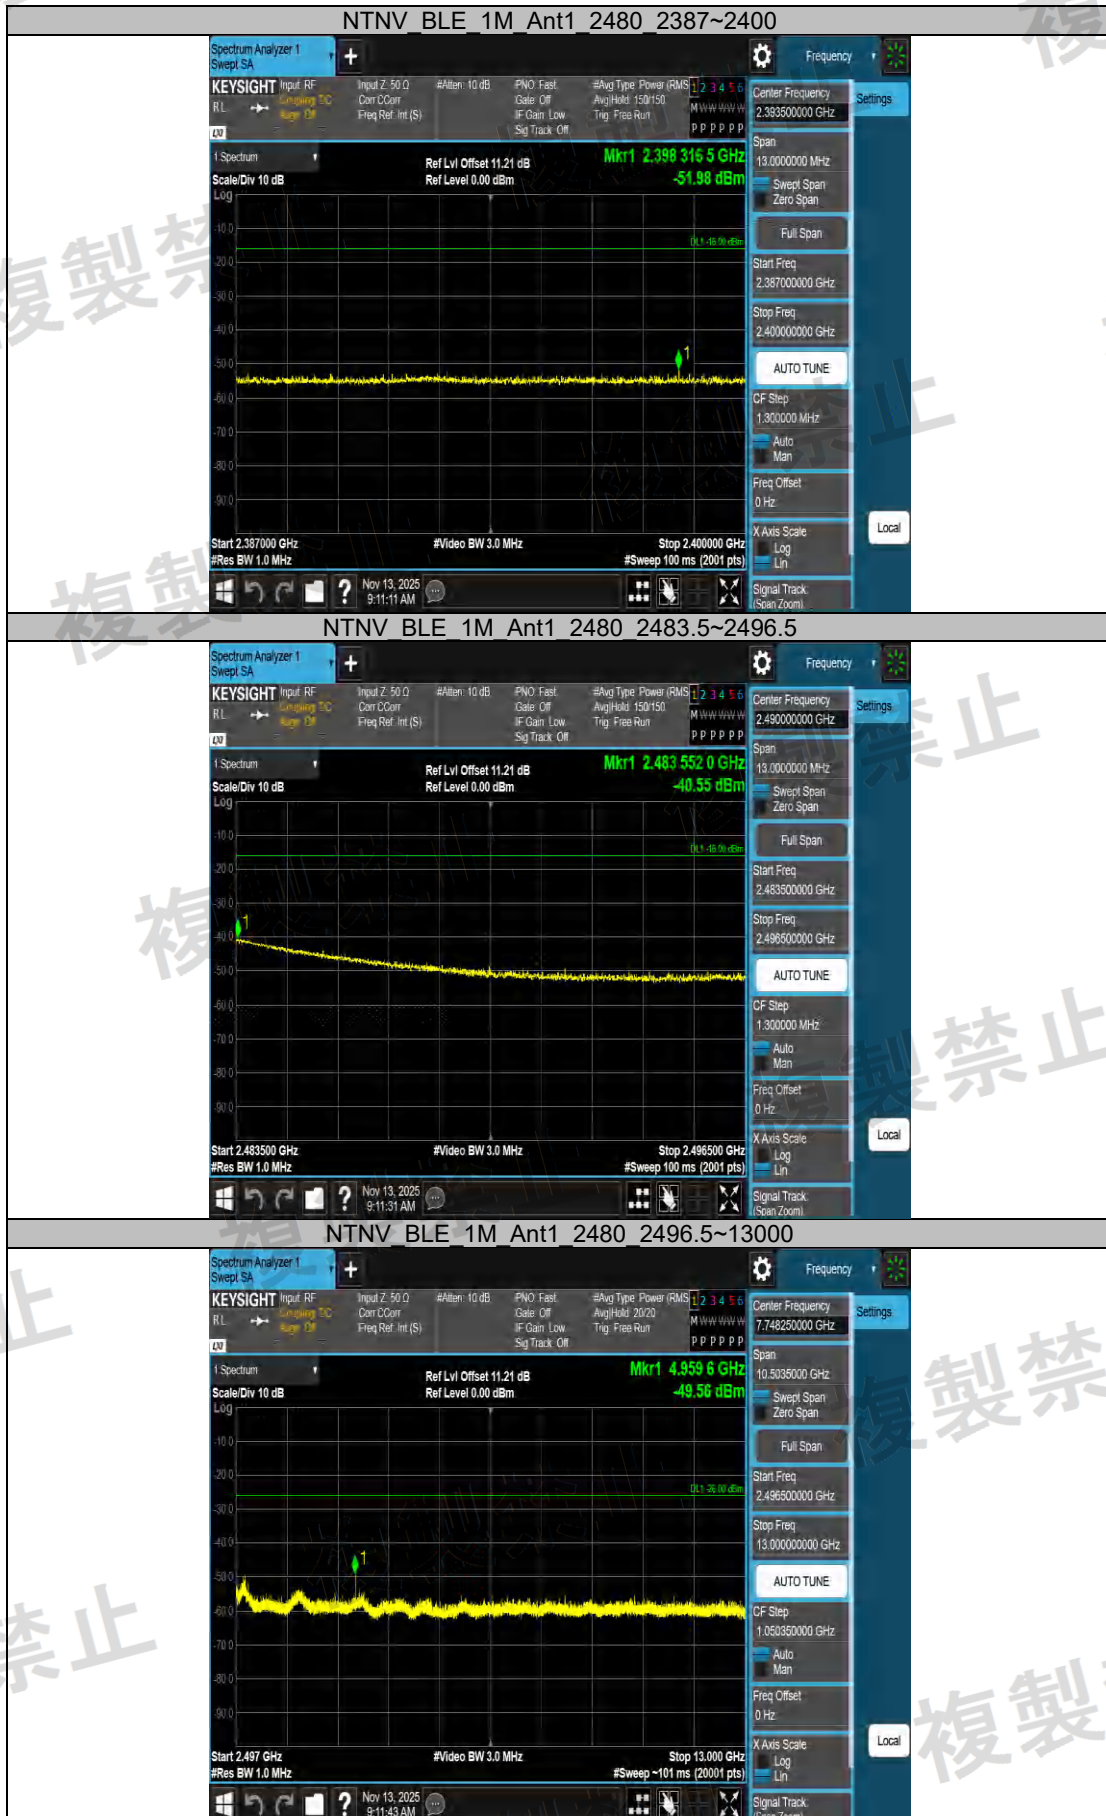




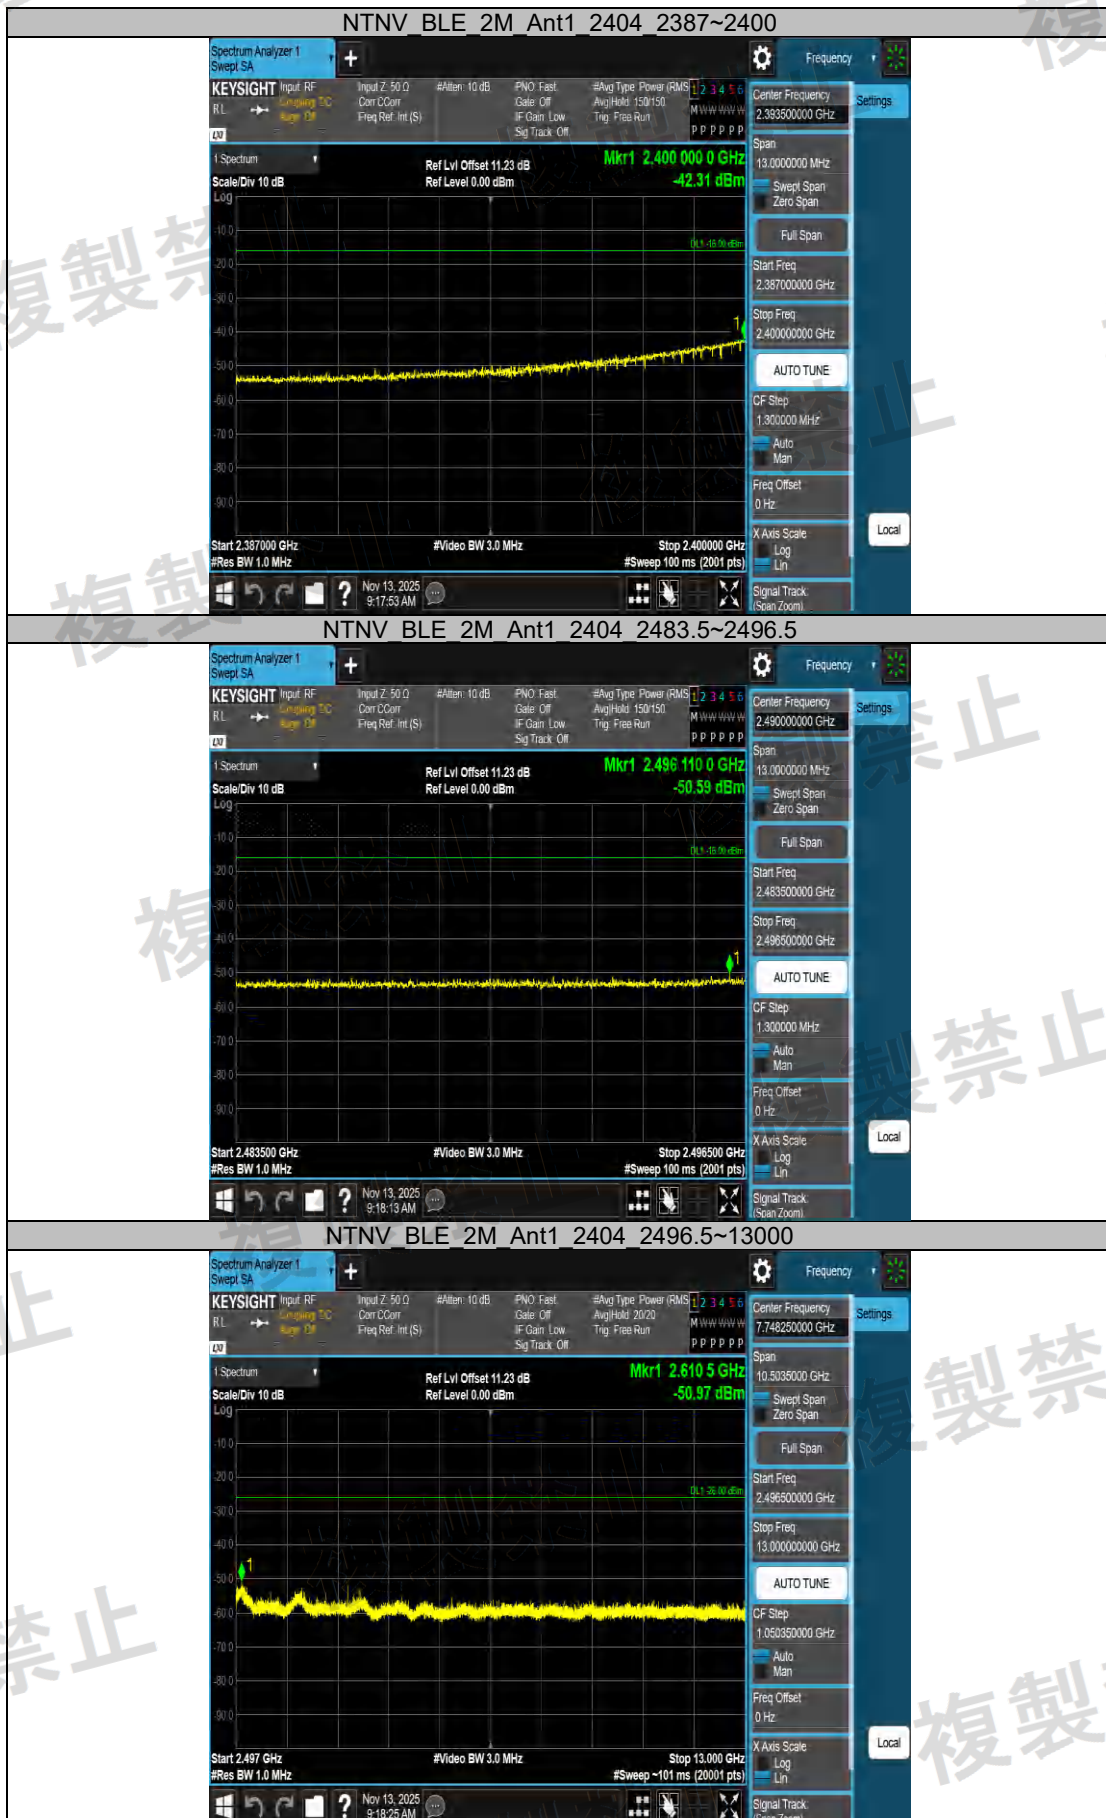







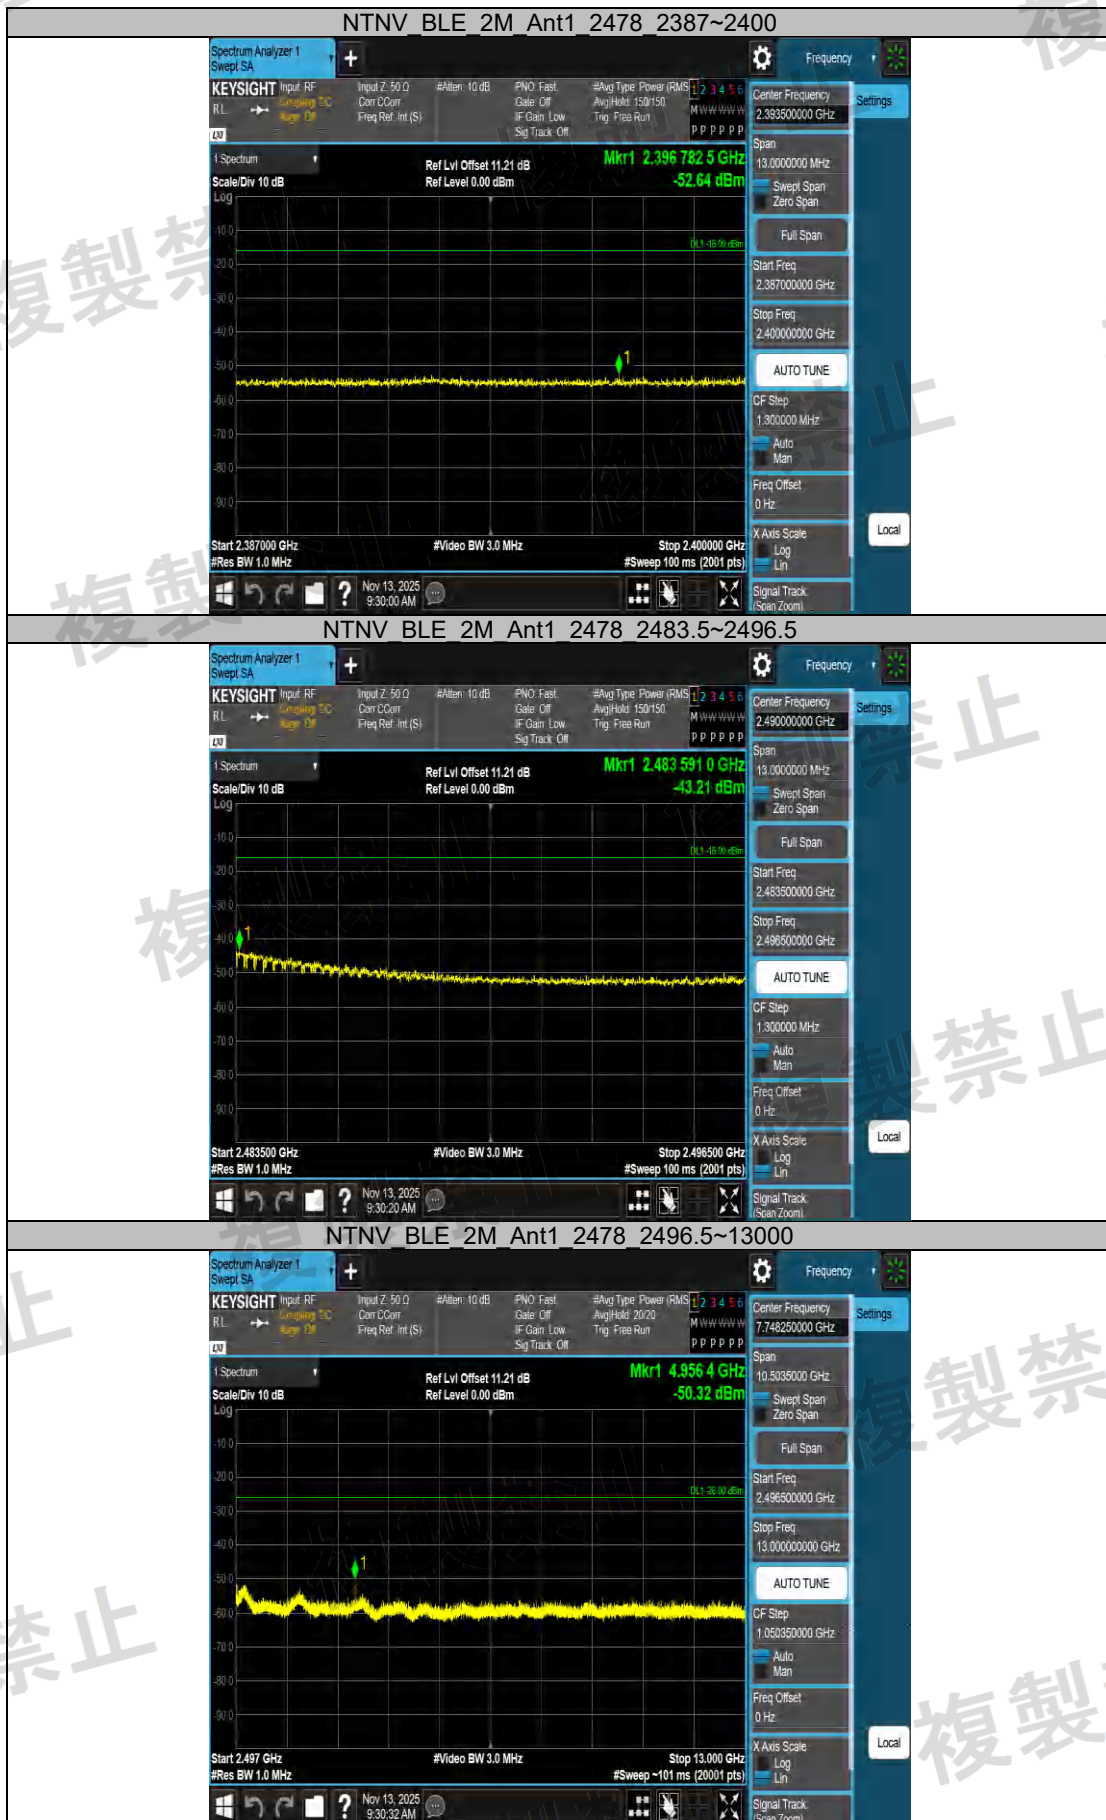












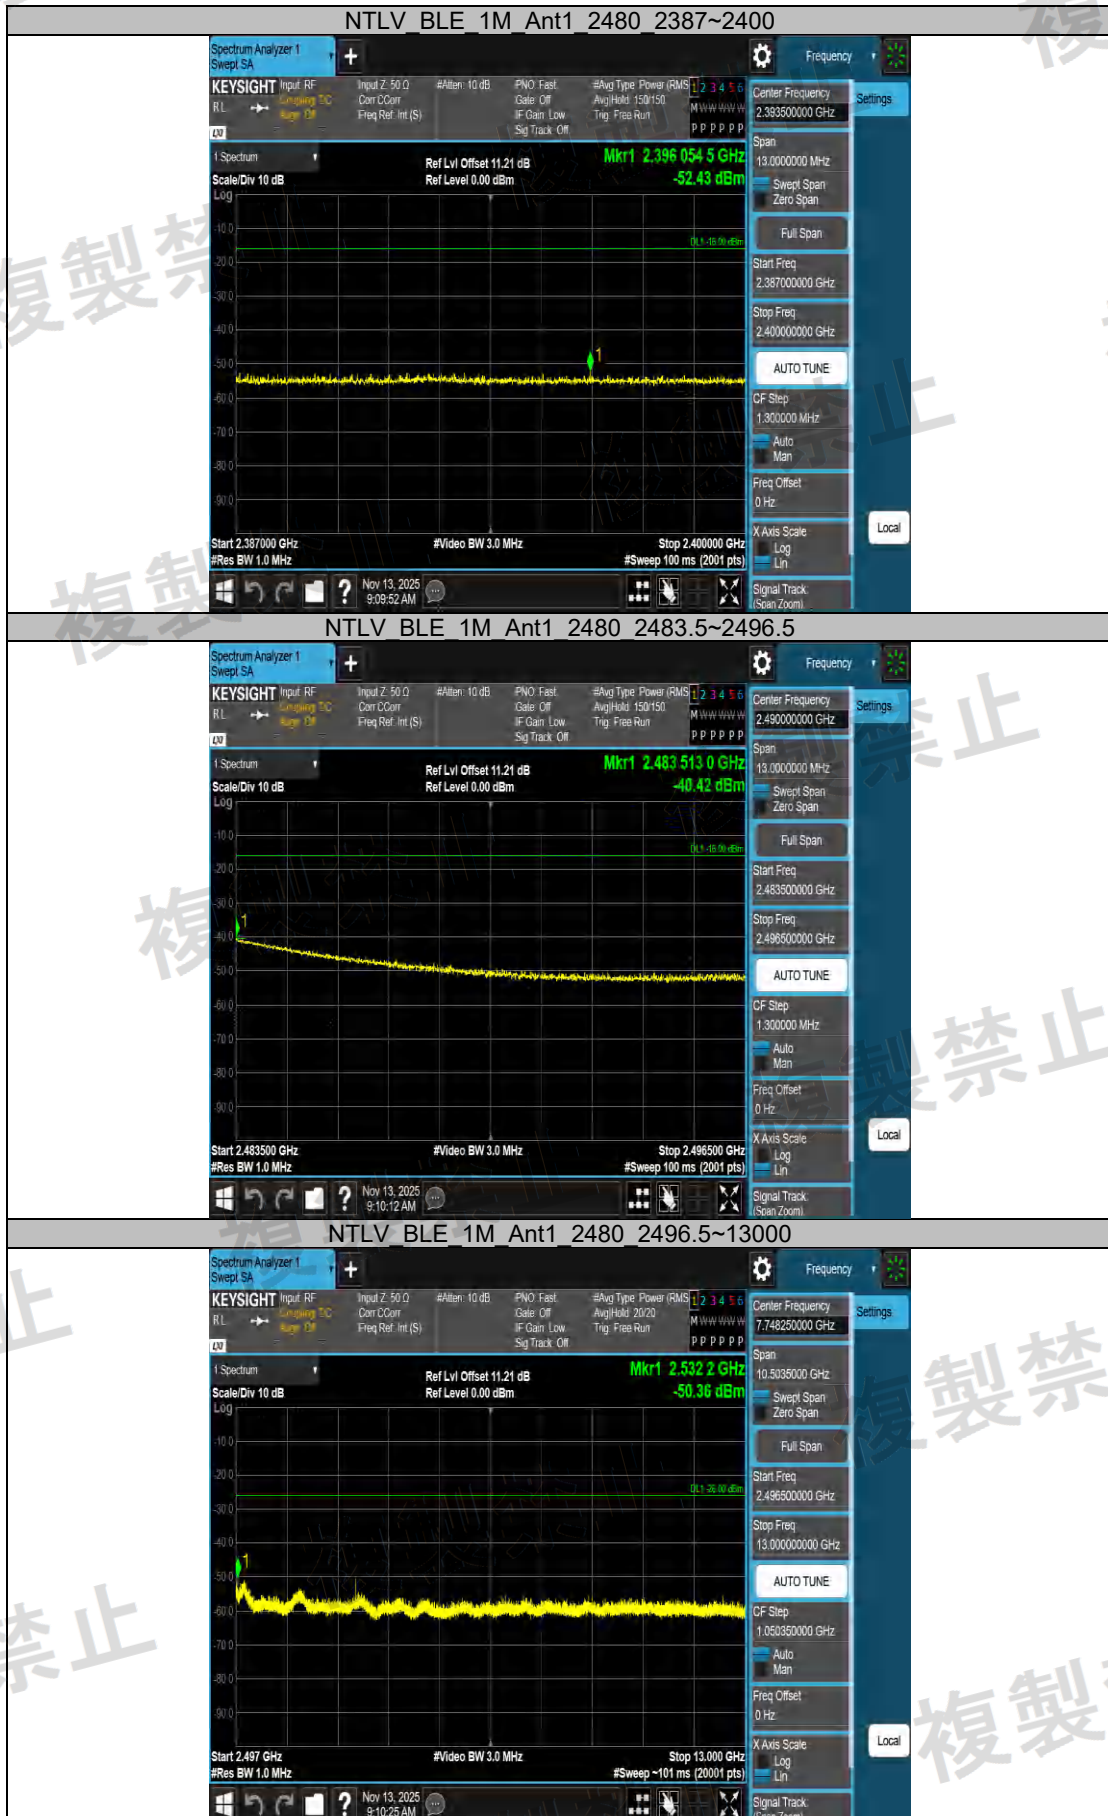













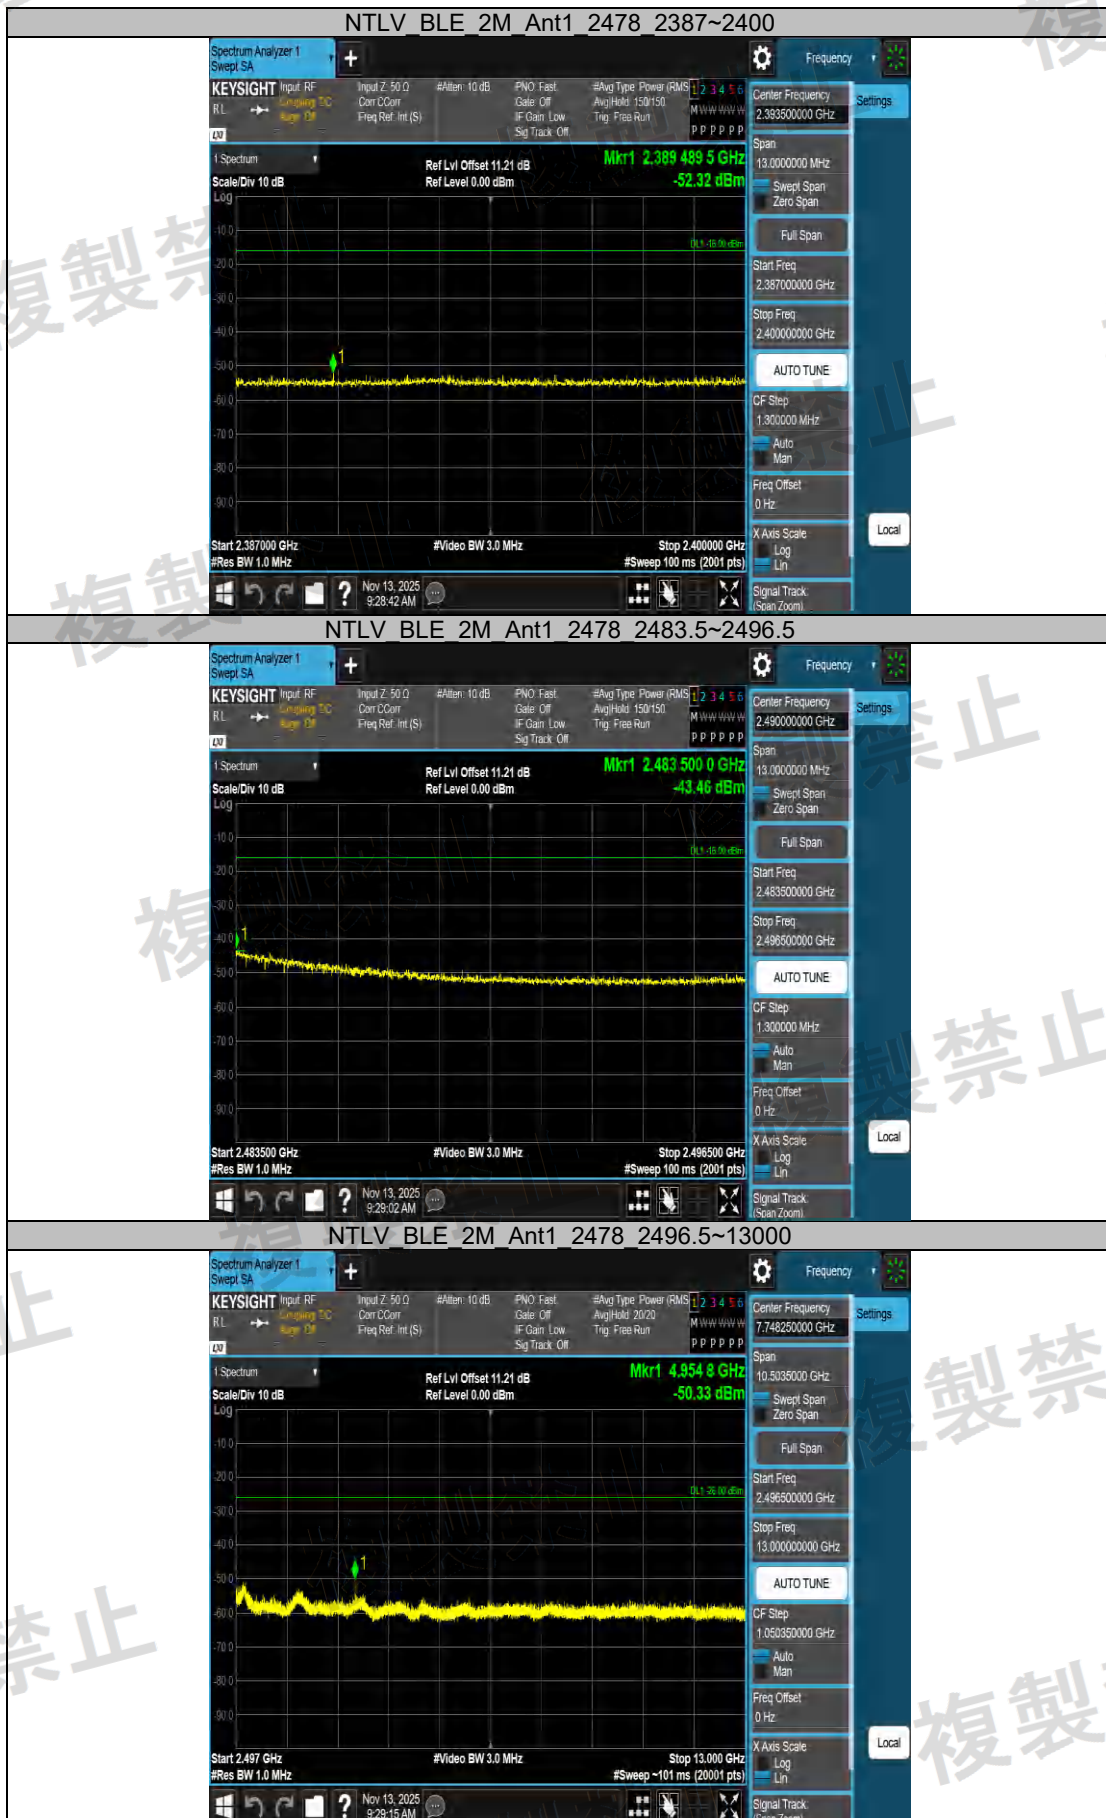




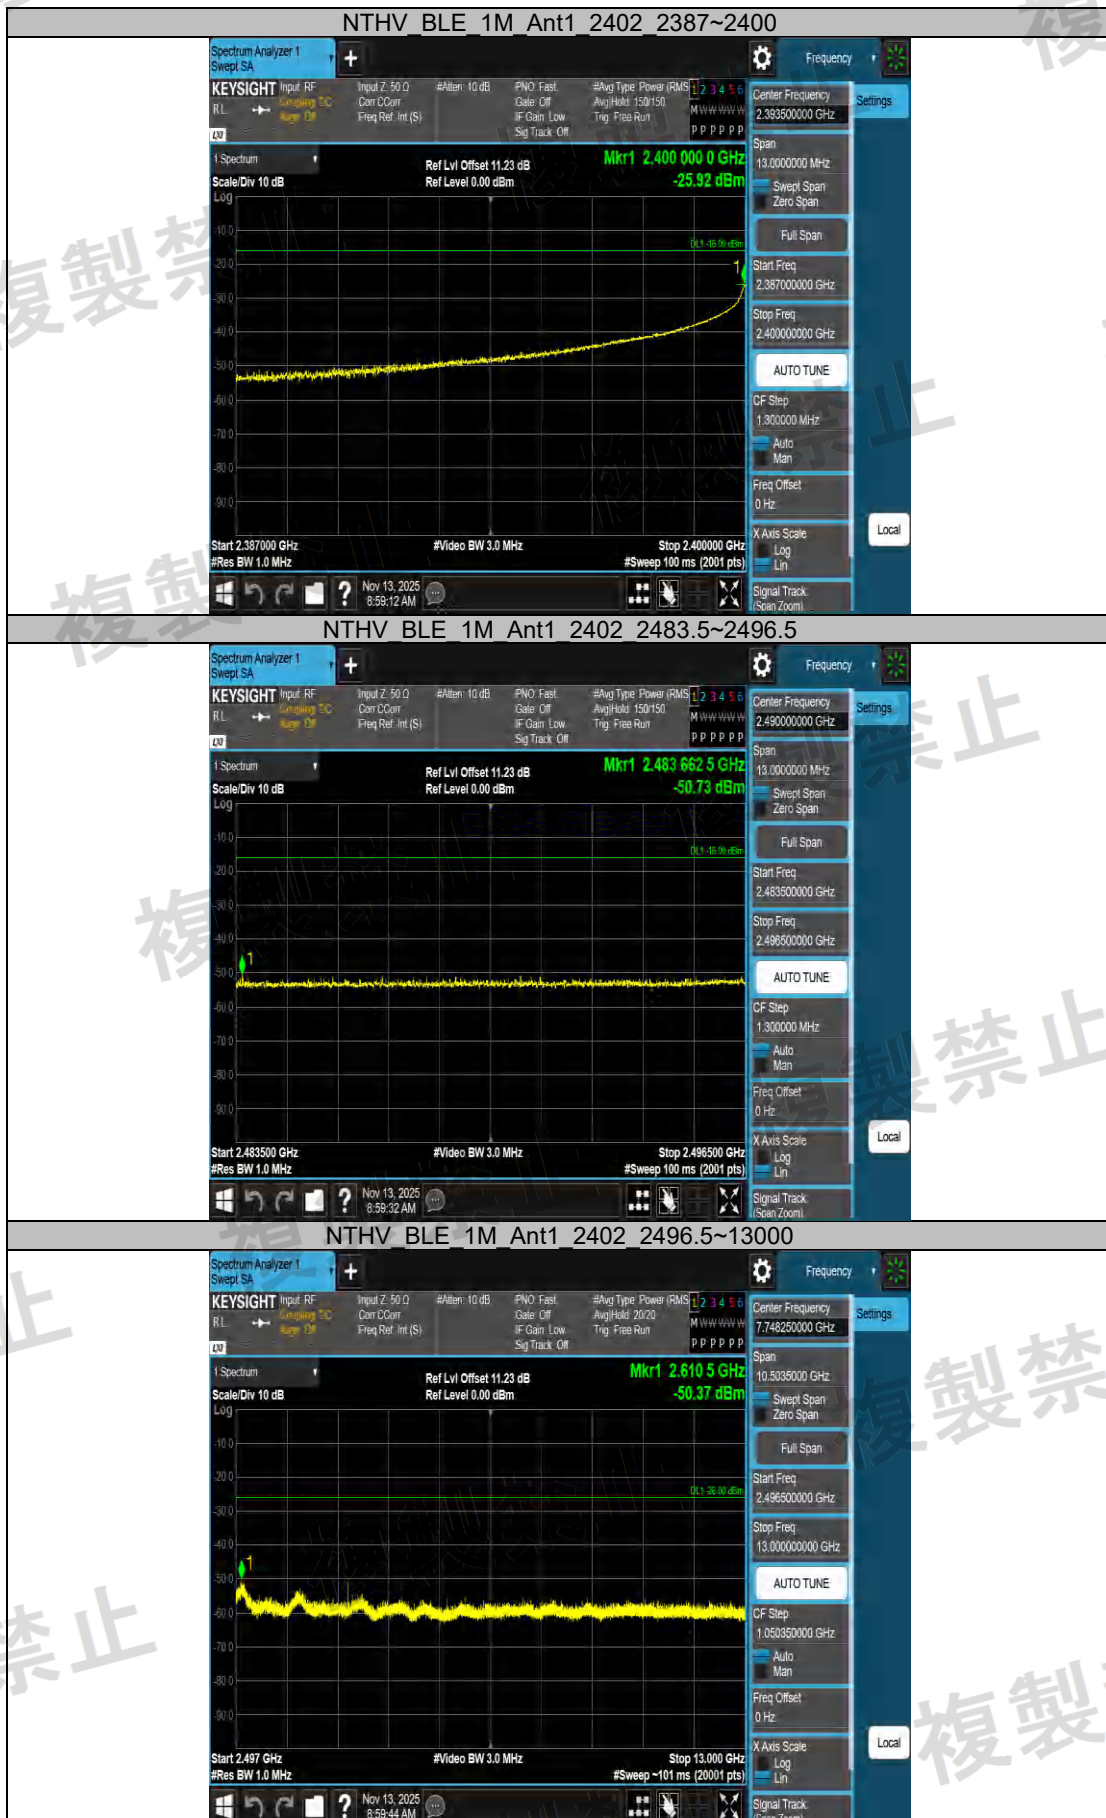







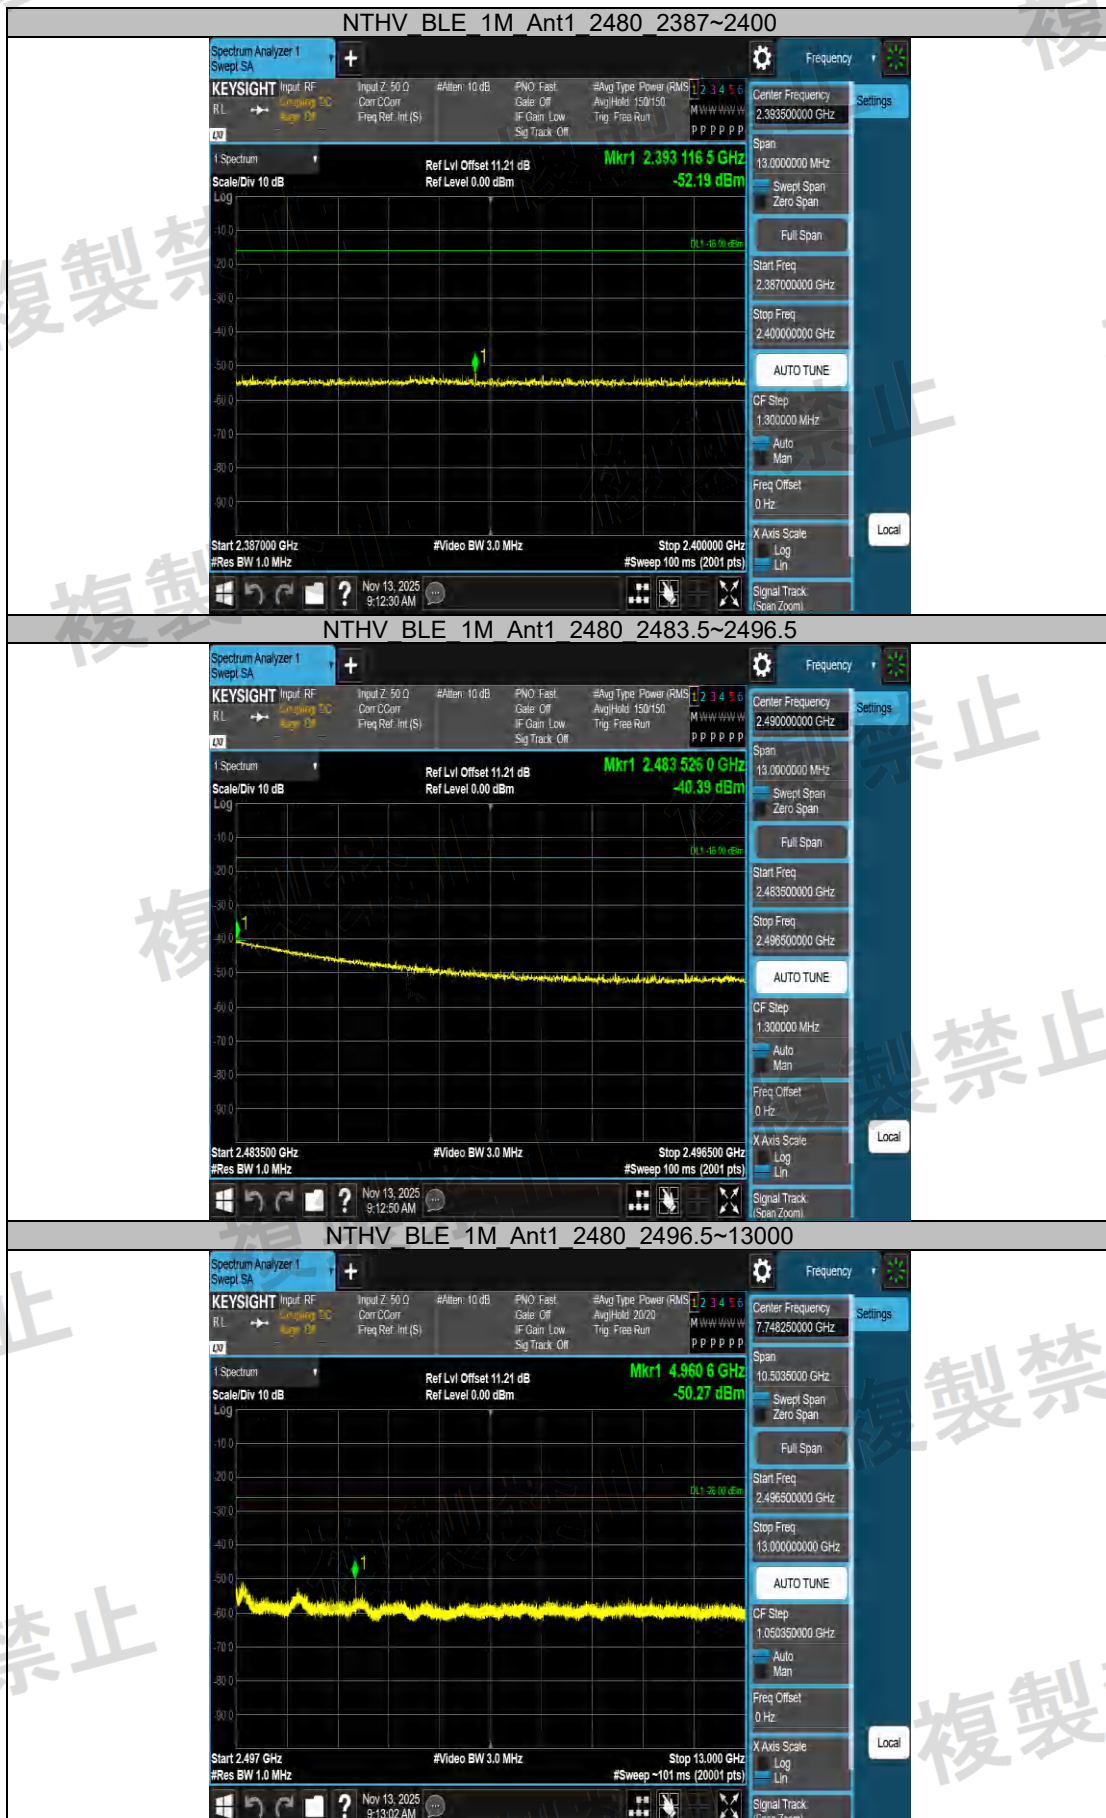












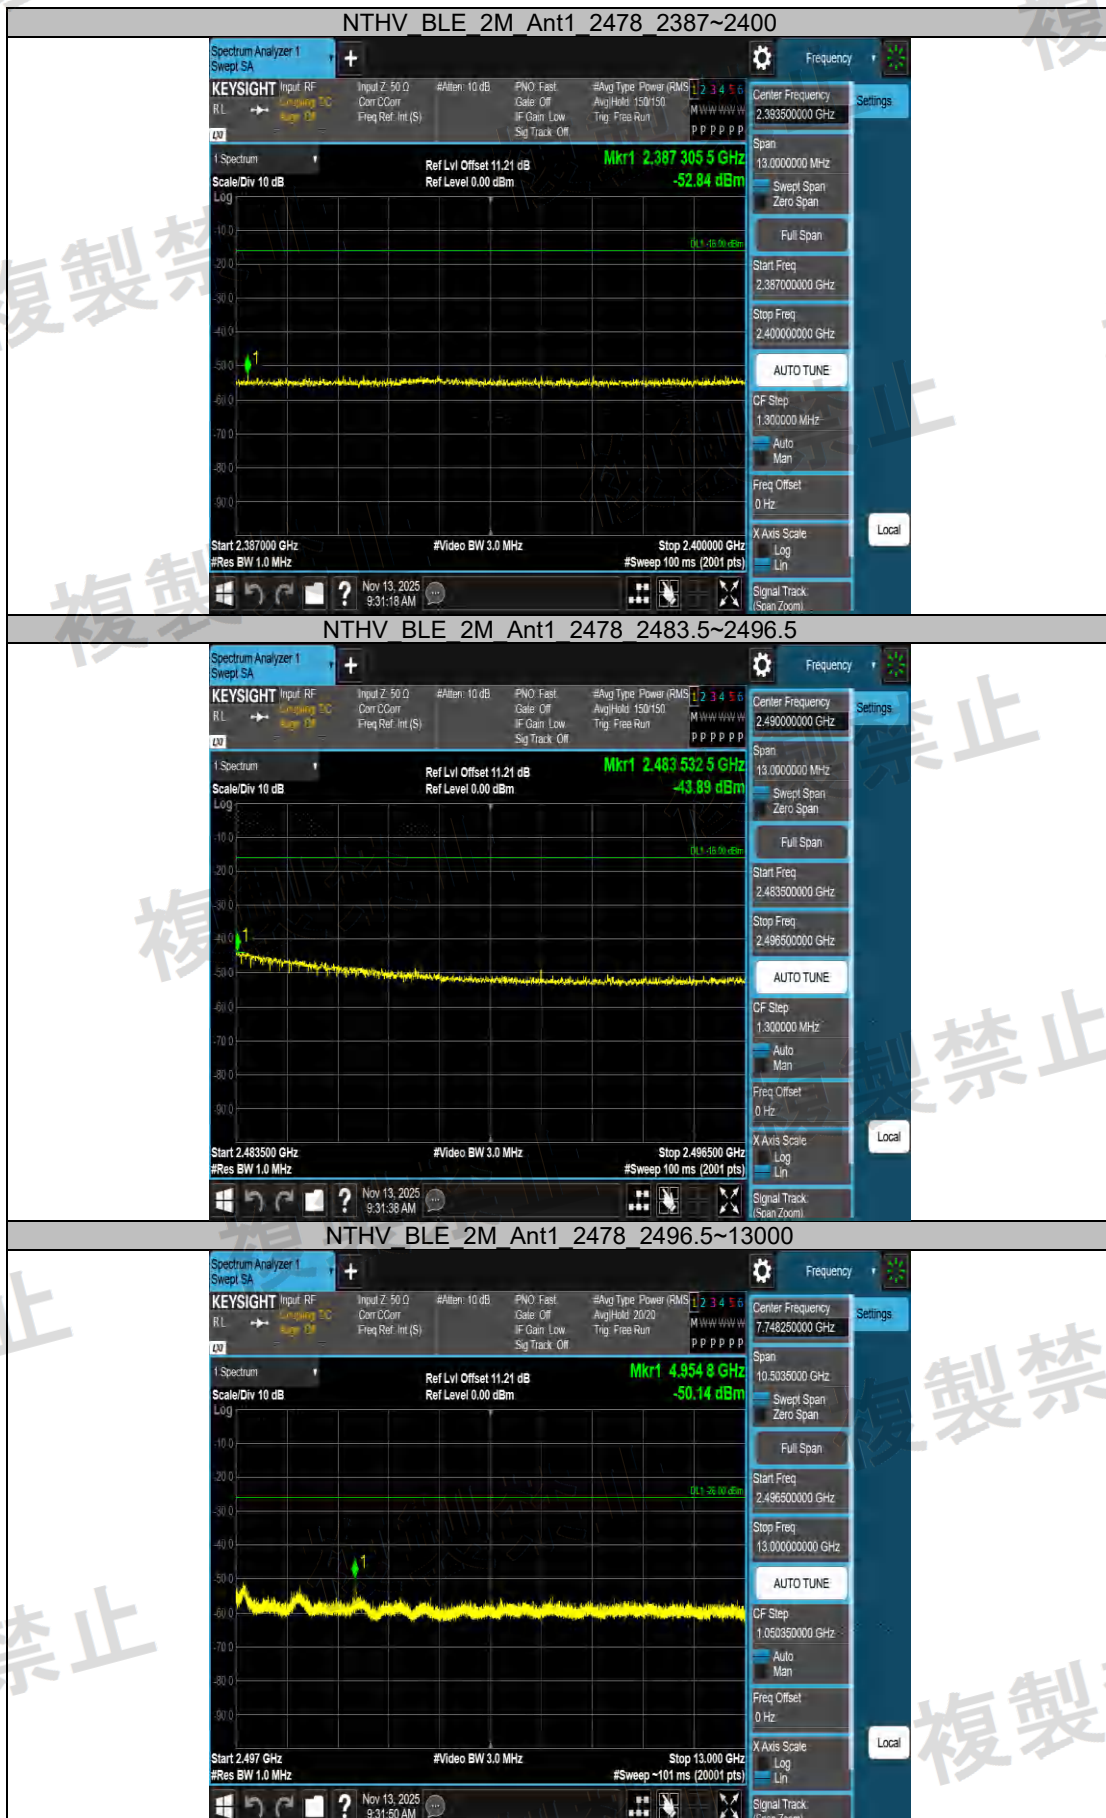

5 Appendix A.5: SPURIOUS EMISSIONS FOR RECEIVER

TestCondition	TestMode	Antenna	Freq(MHz)	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	BLE_1M	Ant1	2402	30~500	172.41	-68.00	≤-54	0.15849	≤4	PASS
				500~1000	731.75	-75.58	≤-54	0.02767	≤4	PASS
				1000~12500	3798.53	-63.13	≤-47	0.48641	≤20	PASS
			2440	30~500	174.76	-68.14	≤-54	0.15346	≤4	PASS
				500~1000	731.75	-75.08	≤-54	0.03105	≤4	PASS
				1000~12500	3731.25	-63.57	≤-47	0.43954	≤20	PASS
			2480	30~500	142.57	-68.21	≤-54	0.15101	≤4	PASS
				500~1000	731.75	-75.76	≤-54	0.02655	≤4	PASS
				1000~12500	2084.45	-62.46	≤-47	0.56754	≤20	PASS
	BLE_2M	Ant1	2404	30~500	189.57	-67.63	≤-54	0.17258	≤4	PASS
				500~1000	731.75	-75.45	≤-54	0.02851	≤4	PASS
				1000~12500	2032.13	-63.57	≤-47	0.43954	≤20	PASS
			2440	30~500	142.57	-67.76	≤-54	0.16749	≤4	PASS
				500~1000	731.75	-75.99	≤-54	0.02518	≤4	PASS
				1000~12500	1998.20	-63.81	≤-47	0.41591	≤20	PASS
			2478	30~500	192.39	-66.67	≤-54	0.21528	≤4	PASS
				500~1000	731.75	-74.43	≤-54	0.03606	≤4	PASS
				1000~12500	3795.65	-62.77	≤-47	0.52845	≤20	PASS
NTLV	BLE_1M	Ant1	2402	30~500	184.63	-68.00	≤-54	0.15849	≤4	PASS
				500~1000	731.75	-74.72	≤-54	0.03373	≤4	PASS
				1000~12500	3751.38	-63.56	≤-47	0.44055	≤20	PASS
			2440	30~500	180.17	-67.79	≤-54	0.16634	≤4	PASS
				500~1000	731.75	-75.17	≤-54	0.03041	≤4	PASS
				1000~12500	3796.80	-62.31	≤-47	0.58749	≤20	PASS
			2480	30~500	174.06	-67.72	≤-54	0.16904	≤4	PASS
				500~1000	588.50	-74.63	≤-54	0.03443	≤4	PASS
				1000~12500	3774.95	-63.70	≤-47	0.42658	≤20	PASS
	BLE_2M	Ant1	2404	30~500	182.52	-66.42	≤-54	0.22803	≤4	PASS
				500~1000	731.75	-75.18	≤-54	0.03034	≤4	PASS
				1000~12500	3758.85	-63.81	≤-47	0.41591	≤20	PASS
			2440	30~500	216.36	-68.35	≤-54	0.14622	≤4	PASS
				500~1000	731.75	-75.57	≤-54	0.02773	≤4	PASS
				1000~12500	3803.70	-63.01	≤-47	0.50003	≤20	PASS
			2478	30~500	184.63	-68.31	≤-54	0.14757	≤4	PASS
				500~1000	731.75	-75.04	≤-54	0.03133	≤4	PASS
				1000~12500	3771.50	-63.39	≤-47	0.45814	≤20	PASS
NTHV	BLE_1M	Ant1	2402	30~500	191.45	-67.63	≤-54	0.17258	≤4	PASS
				500~1000	731.75	-75.74	≤-54	0.02667	≤4	PASS
				1000~12500	3709.98	-63.25	≤-47	0.47315	≤20	PASS
			2440	30~500	179.70	-67.85	≤-54	0.16406	≤4	PASS
				500~1000	731.75	-75.56	≤-54	0.02780	≤4	PASS
				1000~12500	3803.13	-62.59	≤-47	0.55081	≤20	PASS
			2480	30~500	170.77	-67.76	≤-54	0.16749	≤4	PASS
				500~1000	731.75	-74.61	≤-54	0.03459	≤4	PASS
				1000~12500	3836.48	-63.79	≤-47	0.41783	≤20	PASS
	BLE_2M	Ant1	2404	30~500	187.45	-67.56	≤-54	0.17539	≤4	PASS
				500~1000	731.75	-75.44	≤-54	0.02858	≤4	PASS
				1000~12500	3787.03	-63.89	≤-47	0.40832	≤20	PASS
			2440	30~500	188.86	-68.07	≤-54	0.15596	≤4	PASS
				500~1000	731.75	-75.59	≤-54	0.02761	≤4	PASS
				1000~12500	3734.13	-63.88	≤-47	0.40926	≤20	PASS
			2478	30~500	187.69	-68.34	≤-54	0.14655	≤4	PASS
				500~1000	731.75	-75.43	≤-54	0.02864	≤4	PASS
				1000~12500	3775.53	-63.80	≤-47	0.41687	≤20	PASS



