


Site: AC1	Time: 2020/04/23 - 03:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1361D (Beam-Forming Mode)	

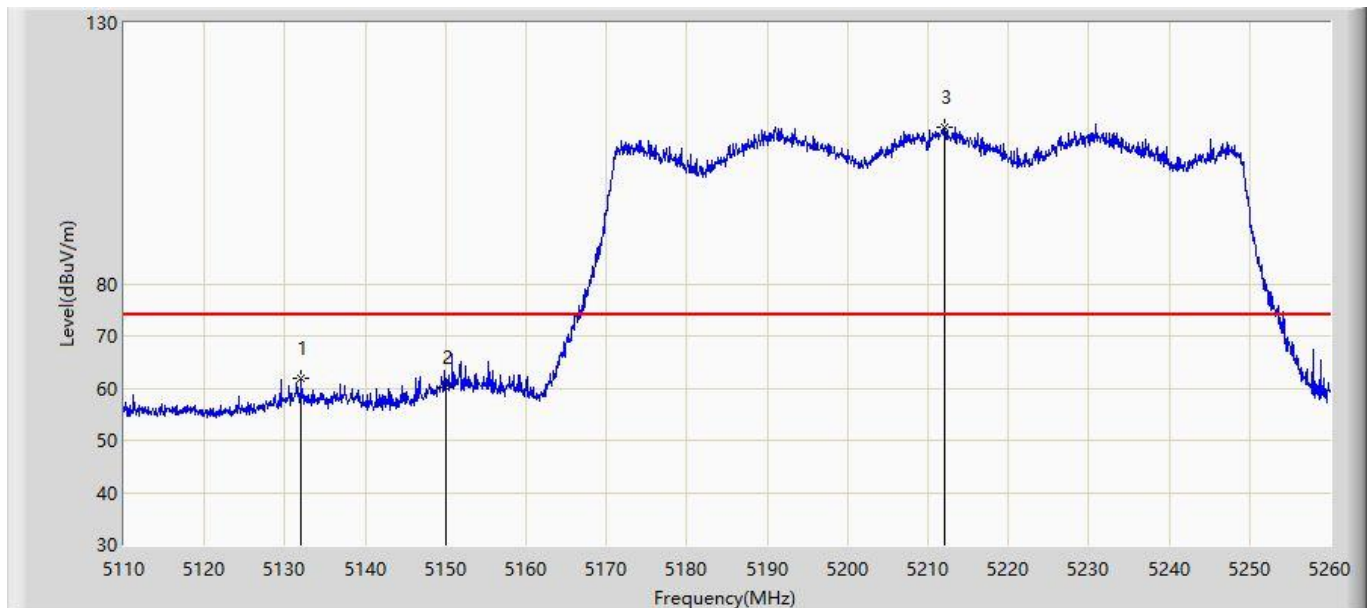


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5132.050	61.916	58.281	-12.084	74.000	3.635	PK
2			5150.000	60.287	56.641	-13.713	74.000	3.646	PK
3		*	5212.150	110.102	106.416	N/A	N/A	3.686	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1361D (Beam-Forming Mode)	

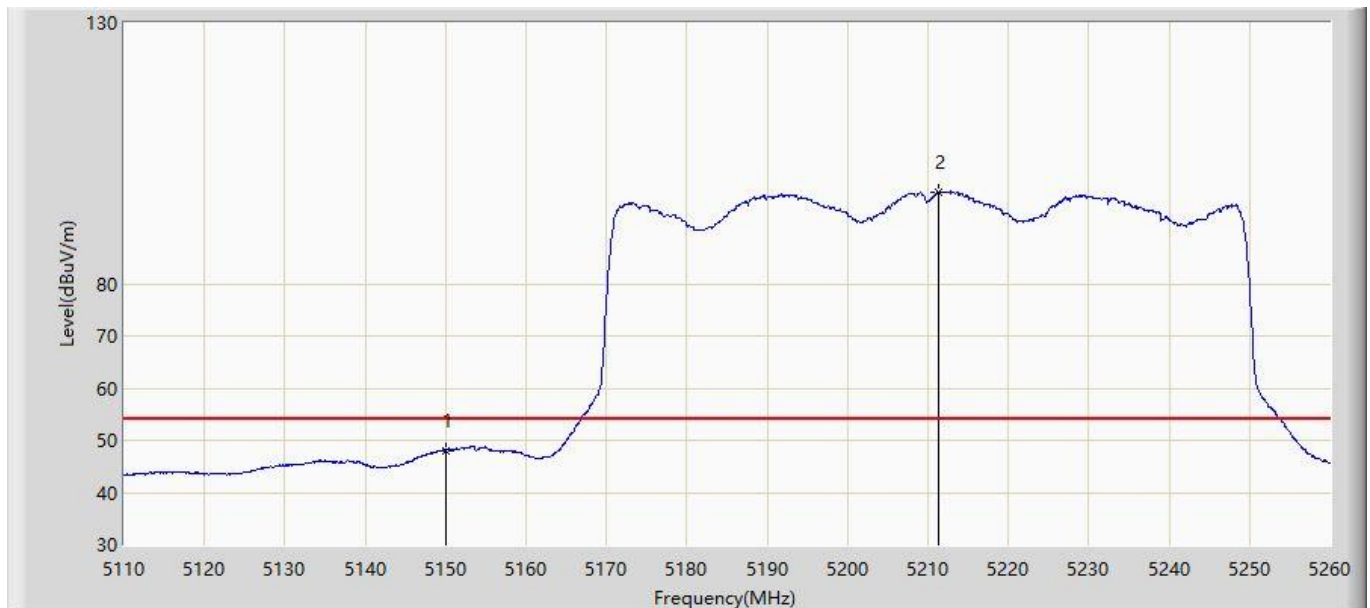


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.011	44.365	-5.989	54.000	3.646	AV
2		*	5211.400	97.605	93.919	N/A	N/A	3.686	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1361D (Beam-Forming Mode)	

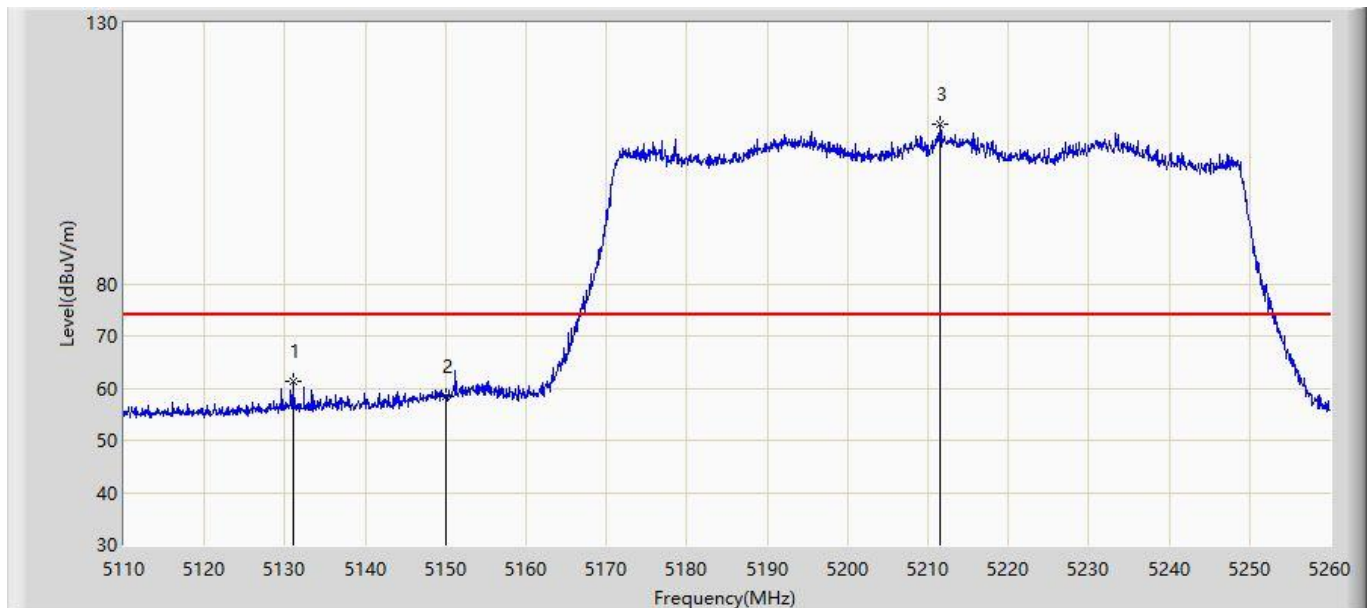


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.000	61.266	57.632	-12.734	74.000	3.634	PK
2			5150.000	58.387	54.741	-15.613	74.000	3.646	PK
3		*	5211.475	110.564	106.878	N/A	N/A	3.686	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1361D (Beam-Forming Mode)	

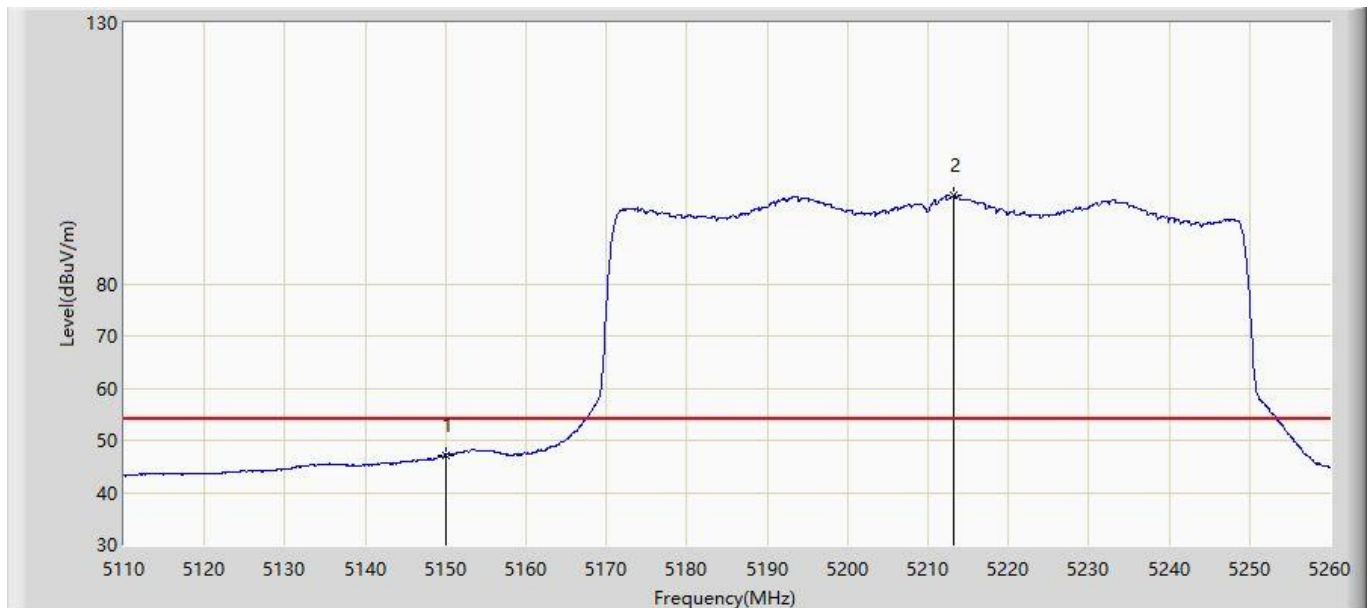


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.136	43.490	-6.864	54.000	3.646	AV
2		*	5213.275	96.824	93.137	N/A	N/A	3.686	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1361D (Beam-Forming Mode)	

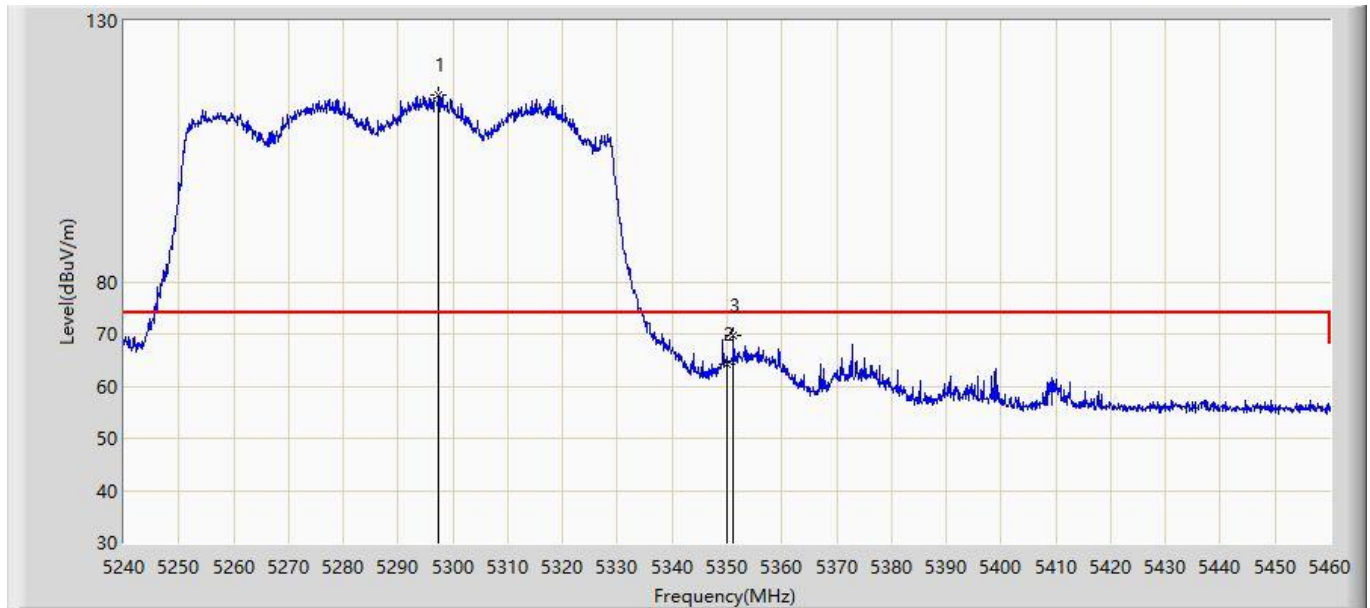


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5297.420	115.766	112.026	N/A	N/A	3.741	PK
2			5350.000	64.235	60.461	-9.765	74.000	3.774	PK
3			5351.210	69.711	65.936	-4.289	74.000	3.775	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1361D (Beam-Forming Mode)	

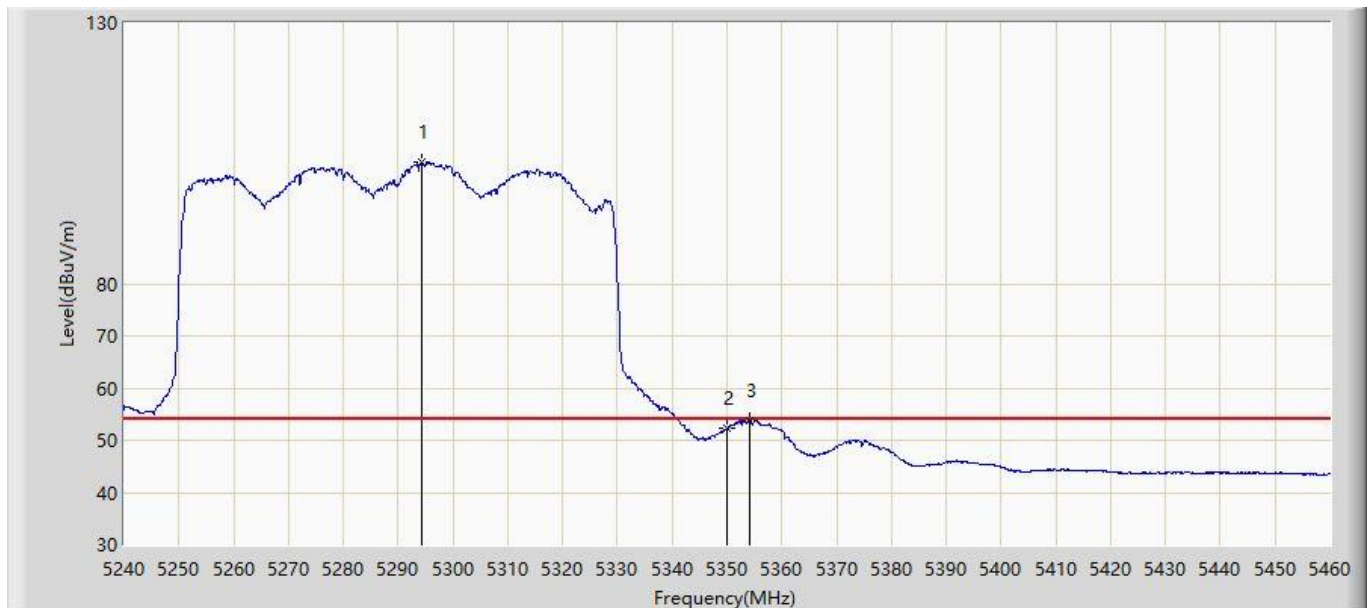


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5294.340	103.240	99.502	N/A	N/A	3.738	AV
2			5350.000	52.222	48.448	-1.778	54.000	3.774	AV
3			5354.180	53.905	50.129	-0.095	54.000	3.776	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1361D (Beam-Forming Mode)	

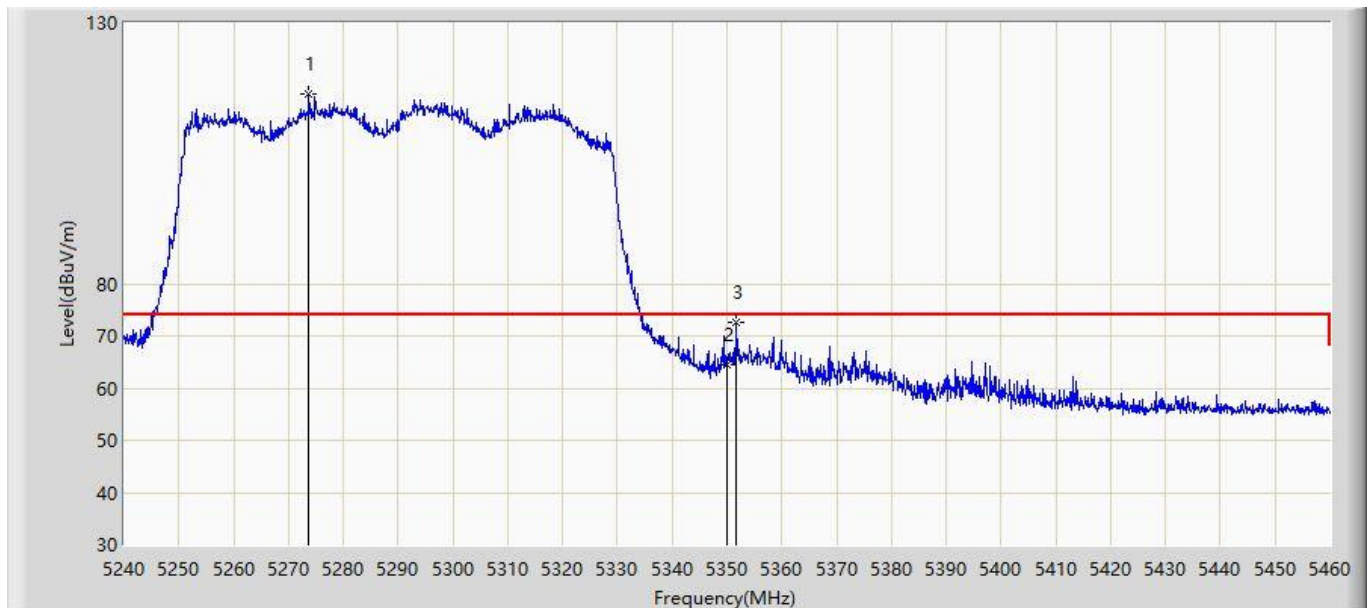


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5273.660	116.454	112.729	N/A	N/A	3.725	PK
2			5350.000	64.385	60.611	-9.615	74.000	3.774	PK
3			5351.650	72.579	68.804	-1.421	74.000	3.775	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1361D (Beam-Forming Mode)	

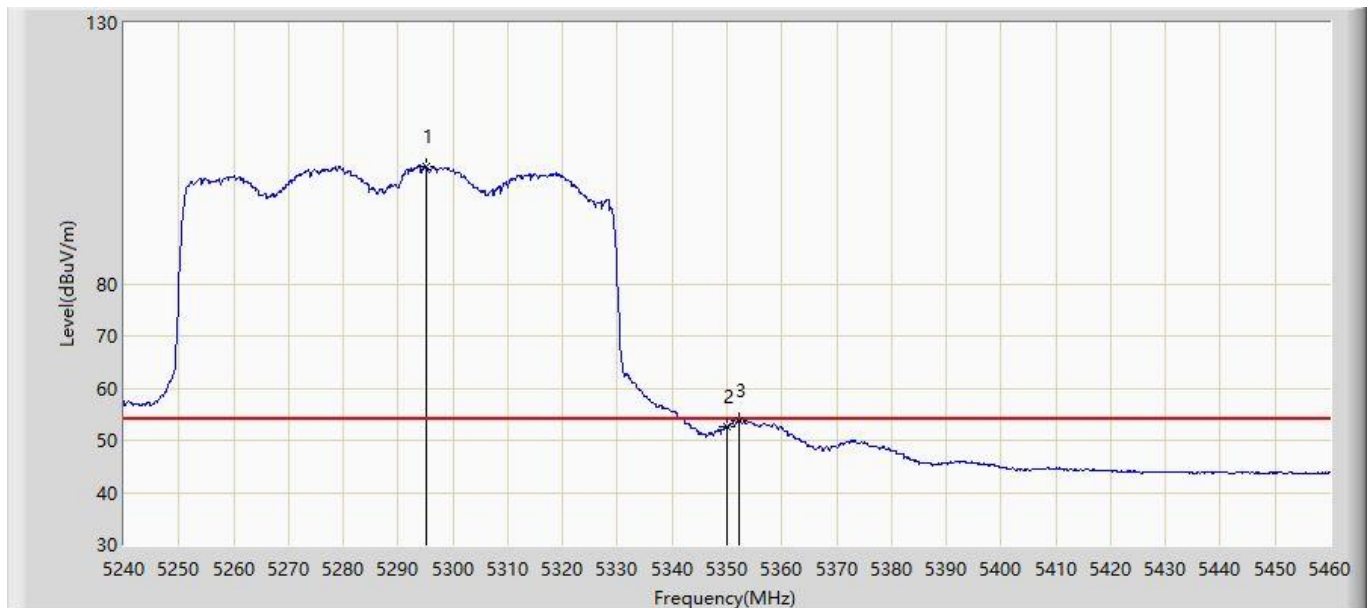


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.000	102.555	98.816	N/A	N/A	3.738	AV
2			5350.000	52.593	48.819	-1.407	54.000	3.774	AV
3			5352.200	53.790	50.015	-0.210	54.000	3.775	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 06:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1361D (Beam-Forming Mode)	

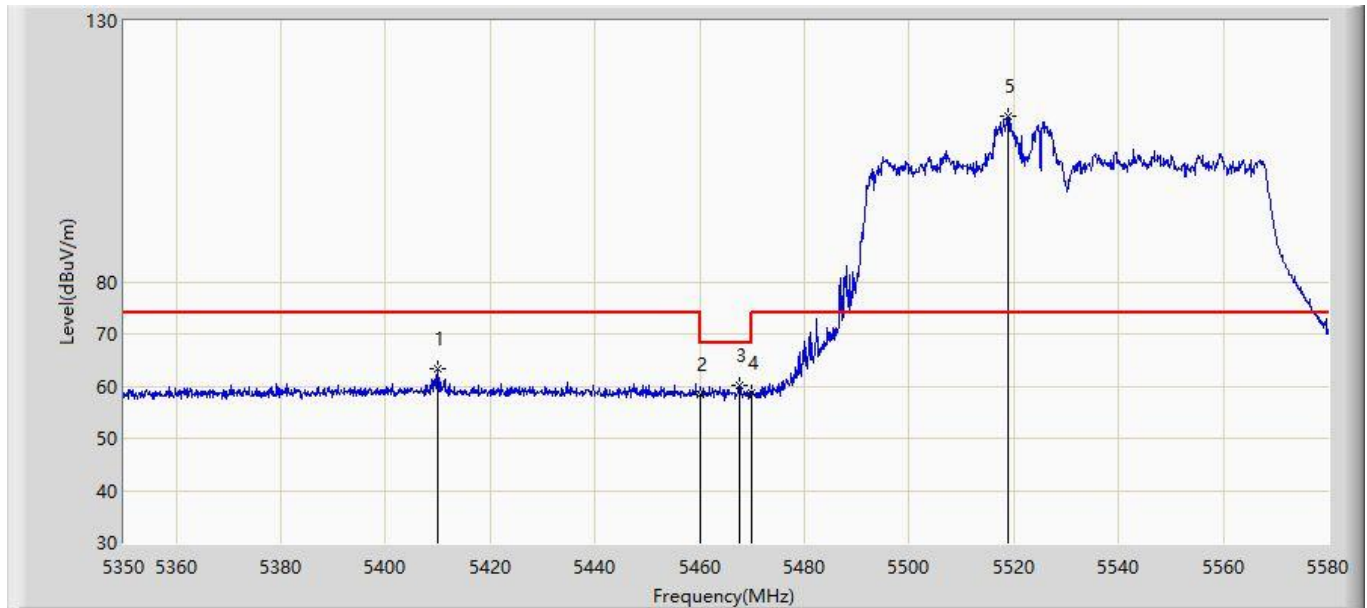


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			5409.915	63.317	59.504	-10.683	74.000	3.812	PK
2			5460.000	58.535	54.691	-15.465	74.000	3.844	PK
3			5467.530	60.128	56.279	-8.072	68.200	3.849	PK
4			5470.000	58.729	54.878	-9.471	68.200	3.850	PK
5		*	5518.820	111.764	107.822	N/A	N/A	3.942	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 06:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1361D (Beam-Forming Mode)	

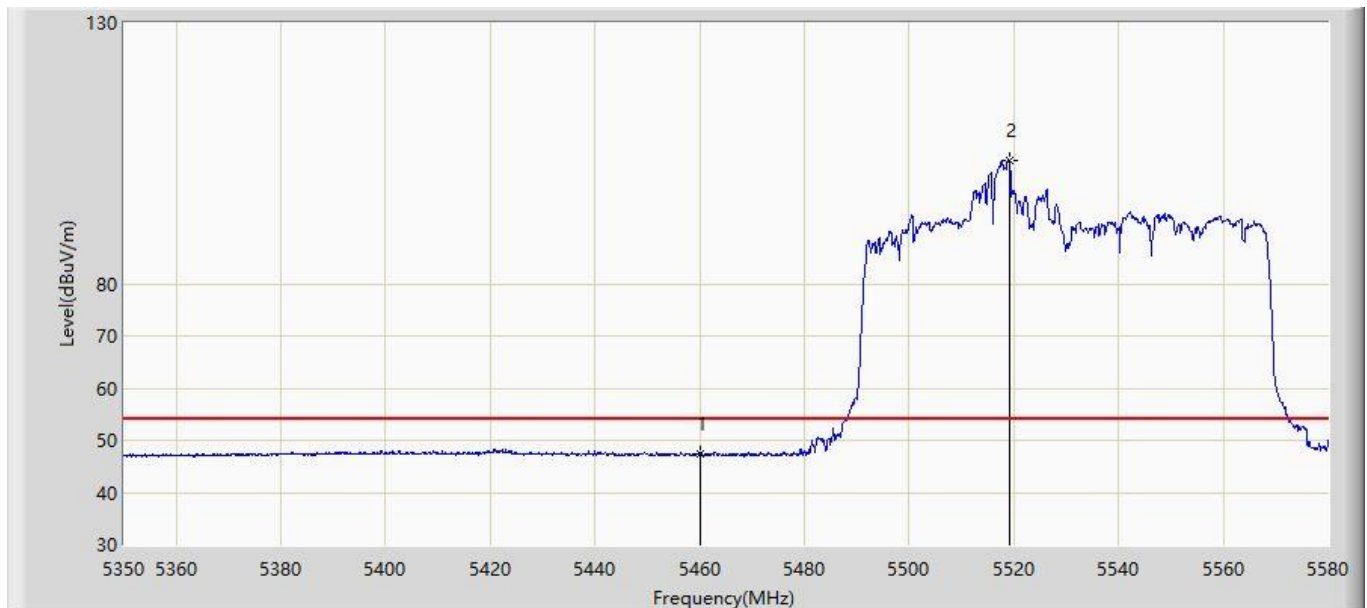


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	47.298	43.454	-6.702	54.000	3.844	AV
2		*	5519.050	103.616	99.673	N/A	N/A	3.944	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 06:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1361D (Beam-Forming Mode)	

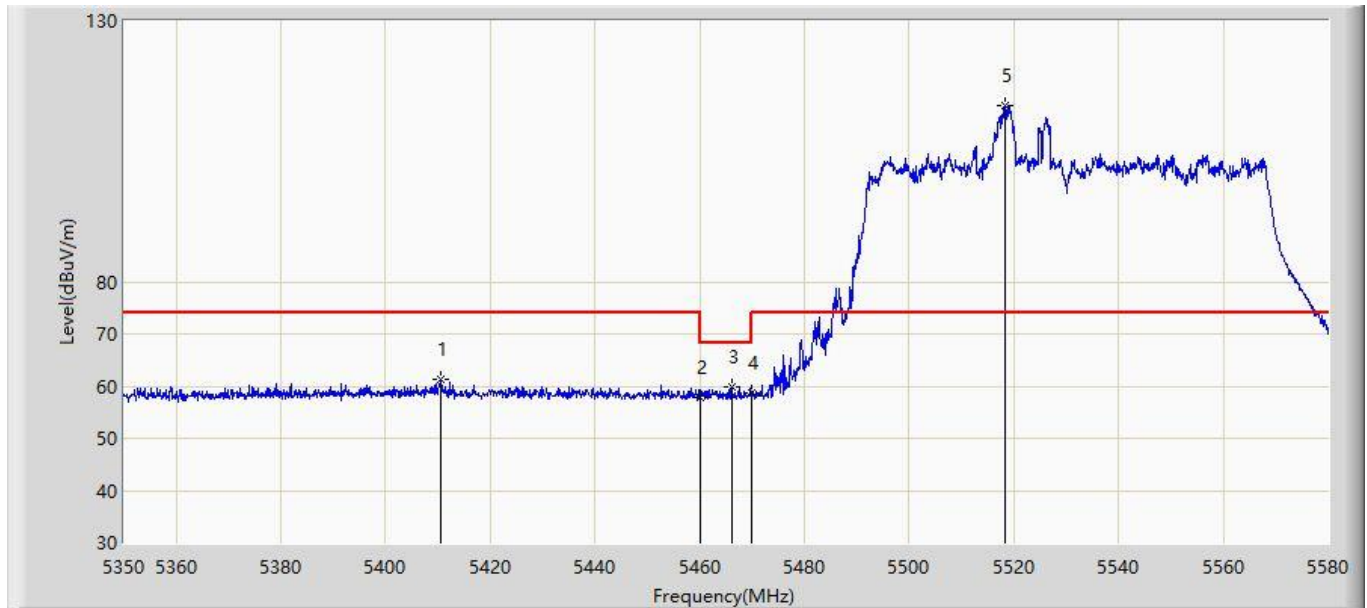


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			5410.490	61.213	57.400	-12.787	74.000	3.813	PK
2			5460.000	57.826	53.982	-16.174	74.000	3.844	PK
3			5466.035	59.851	56.003	-8.349	68.200	3.848	PK
4			5470.000	58.818	54.967	-9.382	68.200	3.850	PK
5		*	5518.245	113.802	109.862	N/A	N/A	3.941	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 06:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1361D (Beam-Forming Mode)	

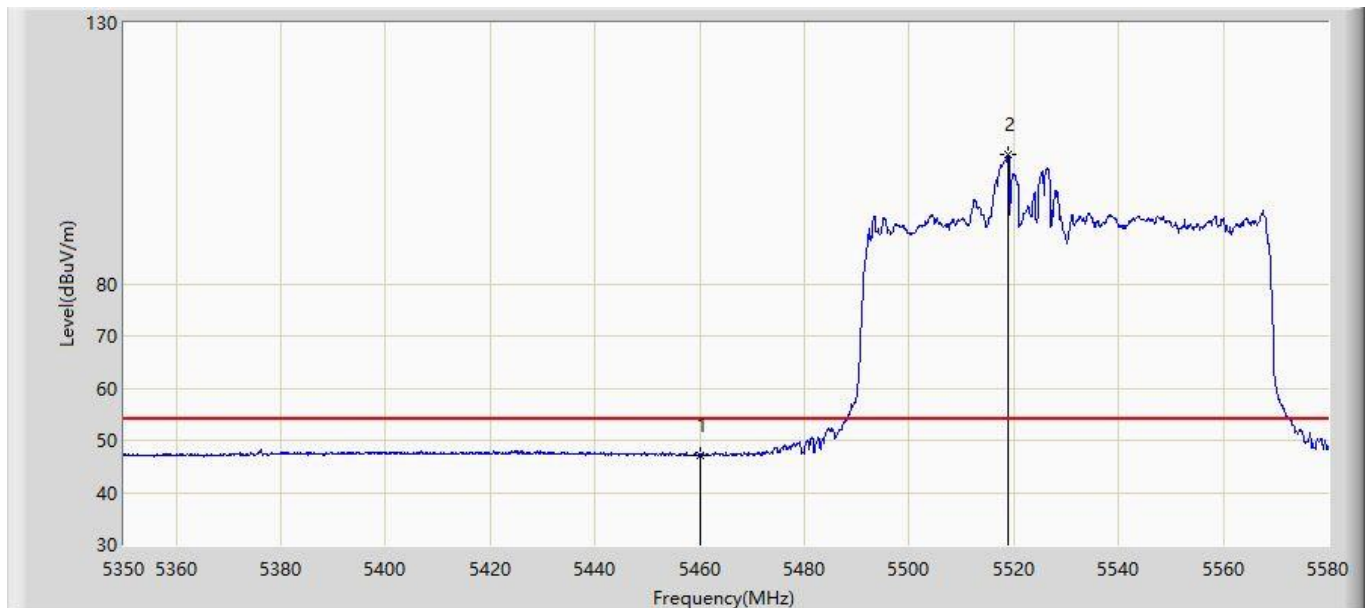


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	47.193	43.349	-6.807	54.000	3.844	AV
2		*	5518.935	104.770	100.827	N/A	N/A	3.942	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/05 - 16:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz with OAW-AP1361D (Beam-Forming Mode)	

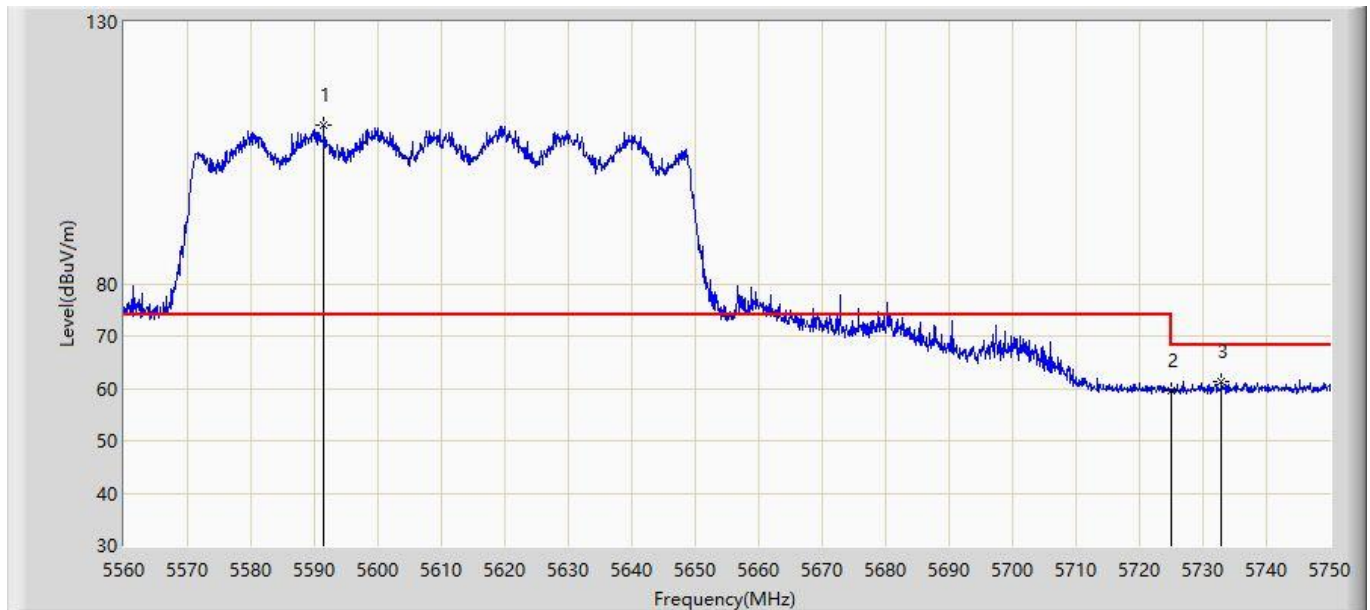


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5591.445	110.367	106.146	N/A	N/A	4.222	PK
2			5725.000	59.594	54.860	-8.606	68.200	4.734	PK
3			5732.900	61.373	56.609	-6.827	68.200	4.764	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/05 - 16:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz with OAW-AP1361D (Beam-Forming Mode)	

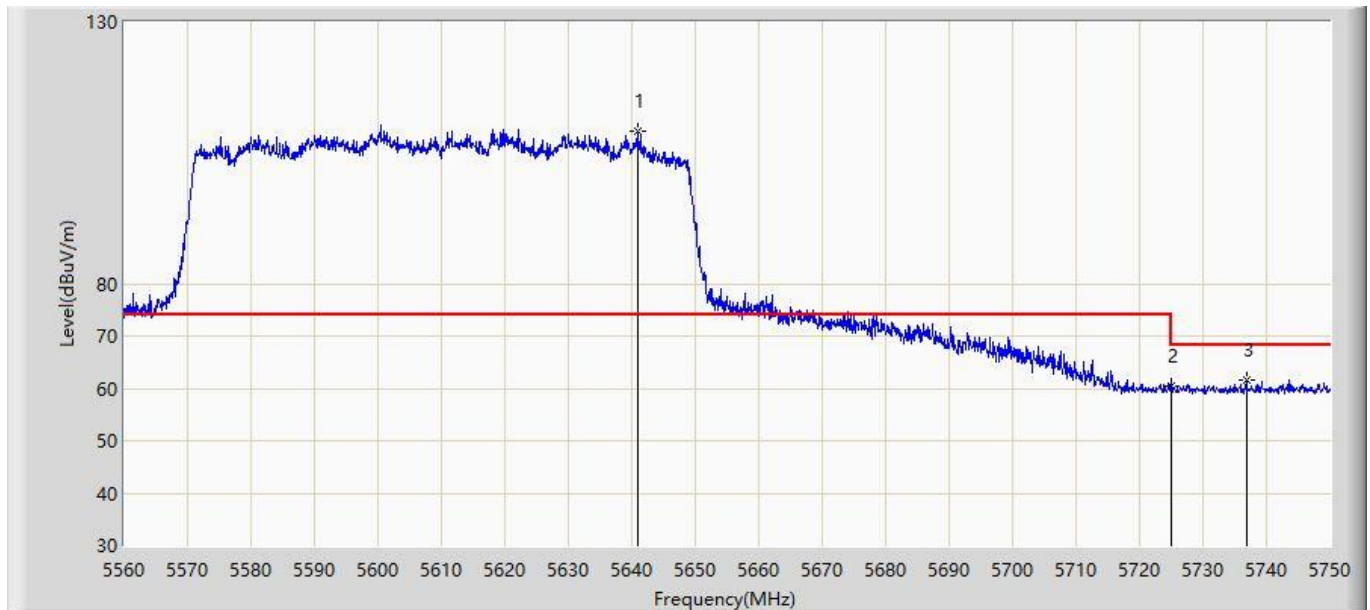


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5640.845	109.231	104.820	N/A	N/A	4.412	PK
2			5725.000	60.418	55.684	-7.782	68.200	4.734	PK
3			5736.795	61.607	56.828	-6.593	68.200	4.779	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/05 - 17:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz with OAW-AP1361D (Beam-Forming Mode)	

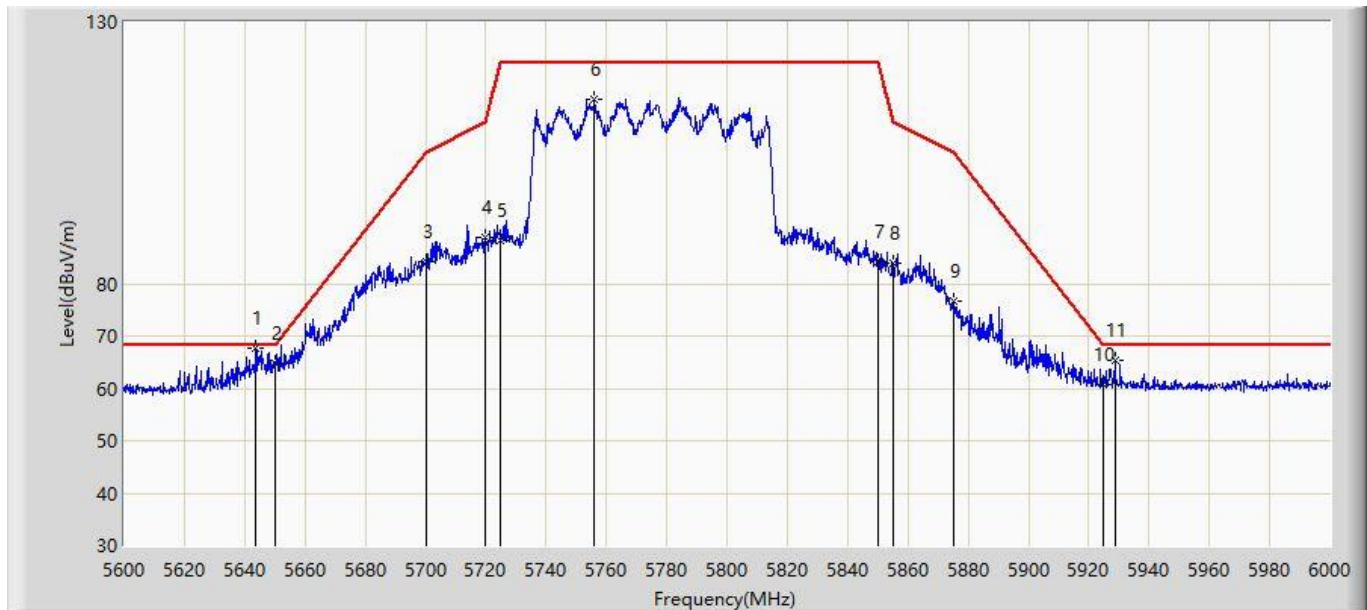


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5643.800	67.641	63.218	-0.559	68.200	4.422	PK
2			5650.000	64.828	60.382	-3.372	68.200	4.446	PK
3			5700.000	84.336	79.698	-20.864	105.200	4.638	PK
4			5720.000	88.840	84.125	-21.960	110.800	4.715	PK
5			5725.000	88.139	83.405	-34.061	122.200	4.734	PK
6			5756.000	115.335	110.482	N/A	N/A	4.853	PK
7			5850.000	84.206	78.992	-37.994	122.200	5.214	PK
8			5855.000	84.054	78.821	-26.746	110.800	5.233	PK
9			5875.000	76.606	71.296	-28.594	105.200	5.310	PK
10			5925.000	60.687	55.185	-7.513	68.200	5.502	PK
11			5928.600	65.484	59.968	-2.716	68.200	5.515	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/05 - 17:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz with OAW-AP1361D (Beam-Forming Mode)	

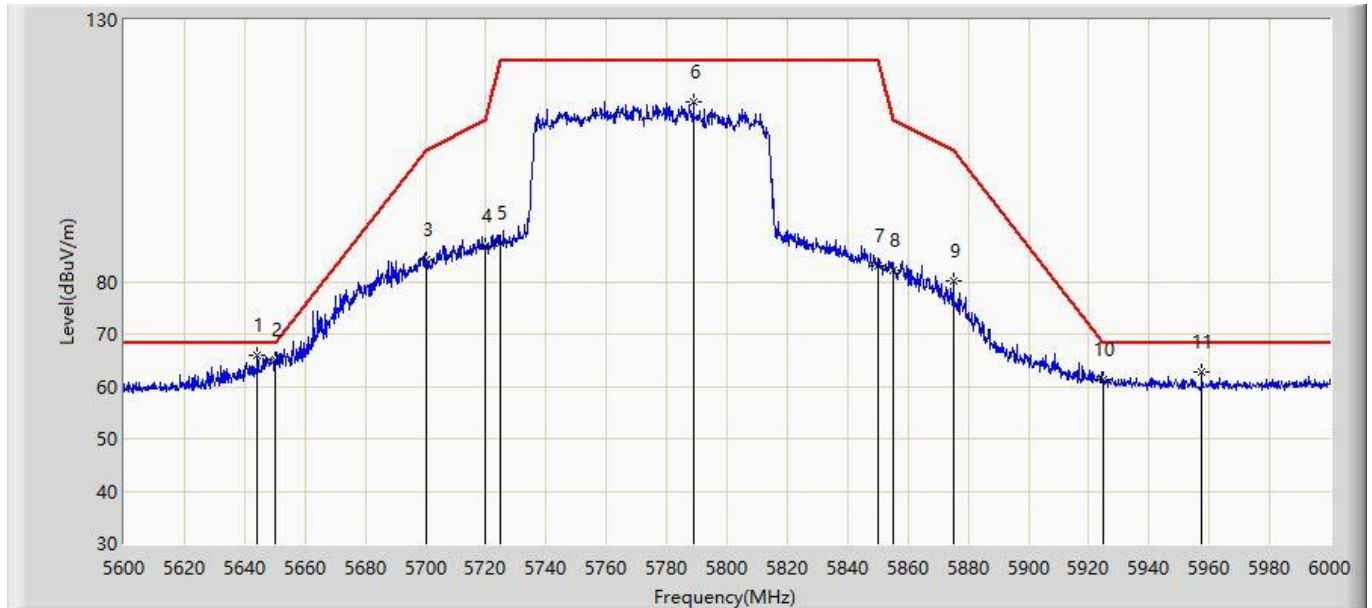


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5644.200	65.855	61.431	-2.345	68.200	4.424	PK
2			5650.000	64.973	60.527	-3.227	68.200	4.446	PK
3			5700.000	84.331	79.693	-20.869	105.200	4.638	PK
4			5720.000	86.684	81.969	-24.116	110.800	4.715	PK
5			5725.000	87.482	82.748	-34.718	122.200	4.734	PK
6			5789.000	114.419	109.439	N/A	N/A	4.980	PK
7			5850.000	82.909	77.695	-39.291	122.200	5.214	PK
8			5855.000	82.099	76.866	-28.701	110.800	5.233	PK
9			5875.000	80.017	74.707	-25.183	105.200	5.310	PK
10			5925.000	61.208	55.706	-6.992	68.200	5.502	PK
11			5957.400	62.614	56.987	-5.586	68.200	5.626	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290MHz with OAW-AP1361D (Beam-Forming Mode)	

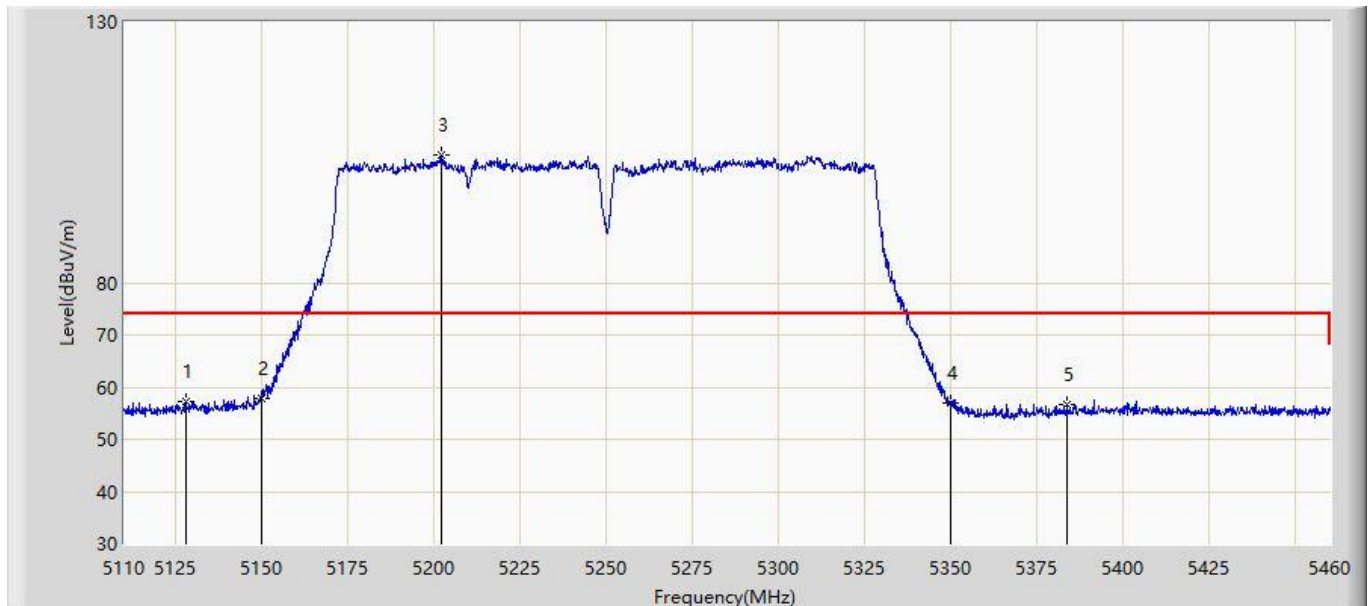


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5127.850	57.243	53.611	-16.757	74.000	3.632	PK
2			5150.000	57.800	54.154	-16.200	74.000	3.646	PK
3		*	5202.225	104.587	100.907	N/A	N/A	3.679	PK
4			5350.000	56.952	53.178	-17.048	74.000	3.774	PK
5			5383.700	56.668	52.872	-17.332	74.000	3.796	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290MHz with OAW-AP1361D (Beam-Forming Mode)	

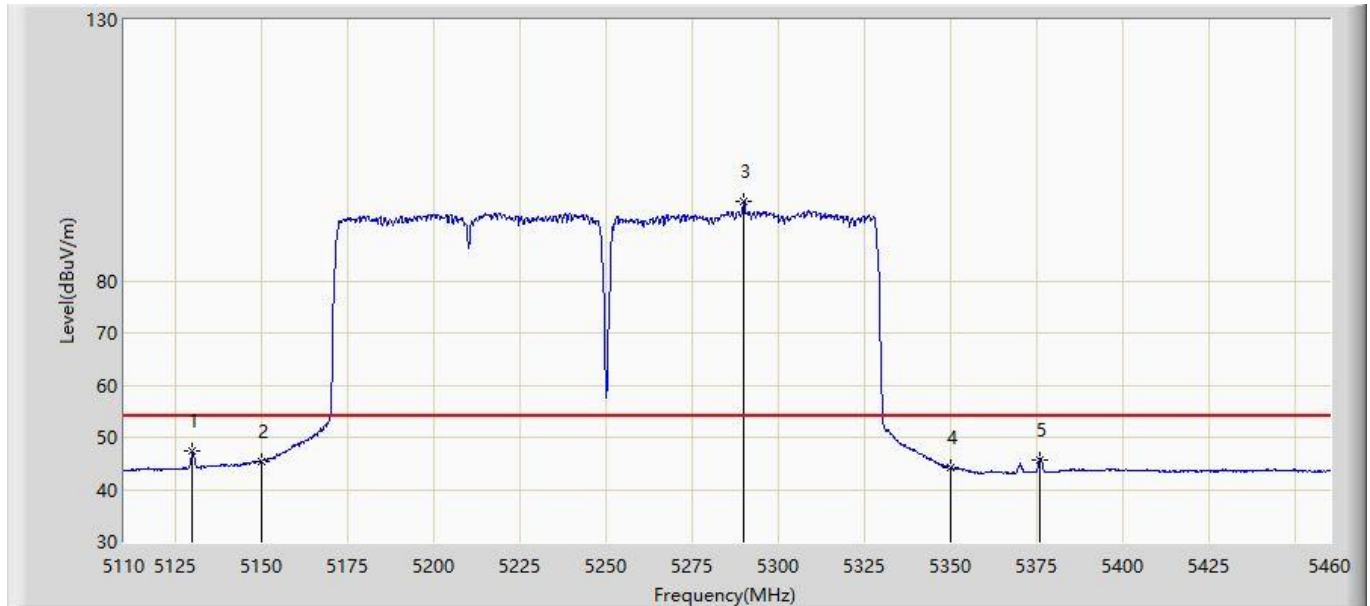


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.950	47.286	43.653	-6.714	54.000	3.633	AV
2			5150.000	45.418	41.772	-8.582	54.000	3.646	AV
3		*	5289.900	95.155	91.420	N/A	N/A	3.735	AV
4			5350.000	44.230	40.456	-9.770	54.000	3.774	AV
5			5375.825	45.690	41.899	-8.310	54.000	3.790	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290MHz with OAW-AP1361D (Beam-Forming Mode)	

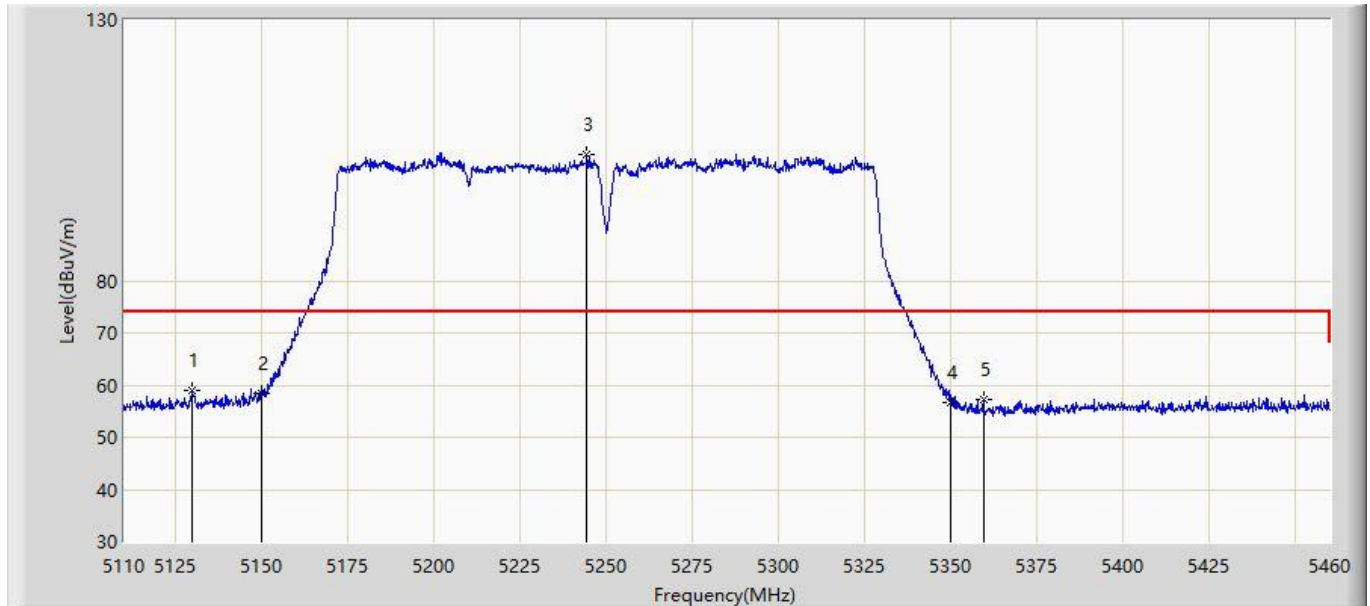


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.775	58.989	55.356	-15.011	74.000	3.633	PK
2			5150.000	58.425	54.779	-15.575	74.000	3.646	PK
3		*	5244.400	104.122	100.415	N/A	N/A	3.707	PK
4			5350.000	56.674	52.900	-17.326	74.000	3.774	PK
5			5359.375	57.305	53.525	-16.695	74.000	3.779	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 03:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290MHz with OAW-AP1361D (Beam-Forming Mode)	

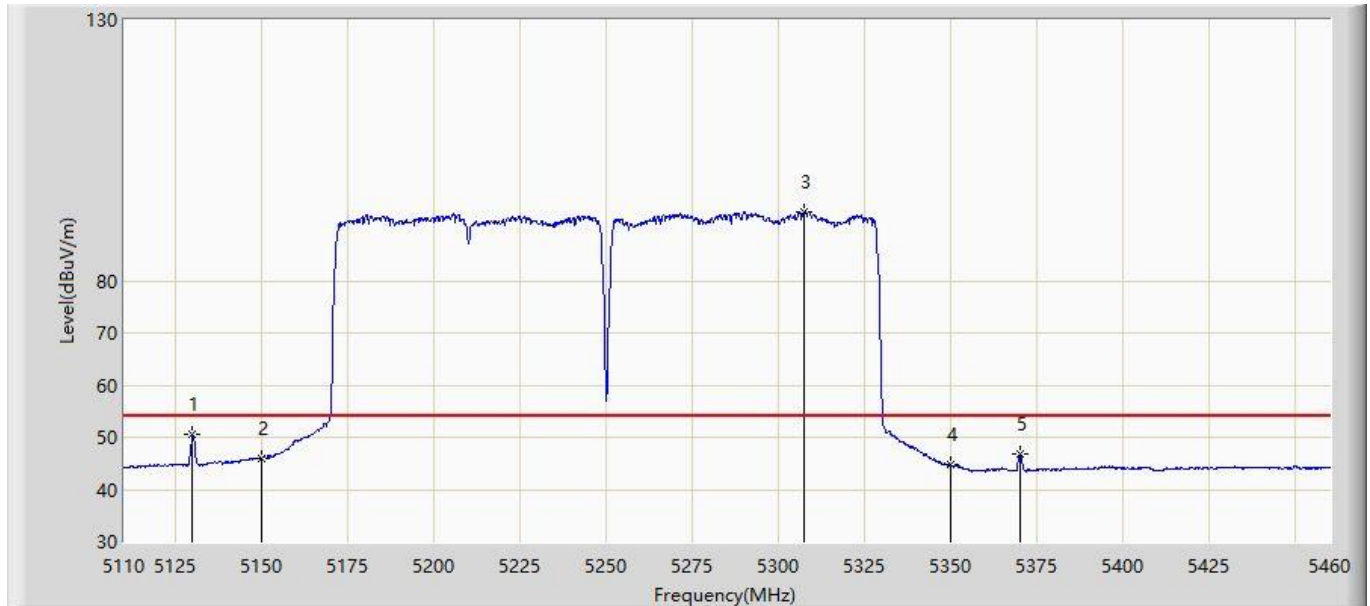


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.950	50.438	46.805	-3.562	54.000	3.633	AV
2			5150.000	45.974	42.328	-8.026	54.000	3.646	AV
3		*	5307.400	93.246	89.499	N/A	N/A	3.747	AV
4			5350.000	44.645	40.871	-9.355	54.000	3.774	AV
5			5370.050	46.730	42.943	-7.270	54.000	3.787	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 16:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1361D (Beam-Forming Mode)	

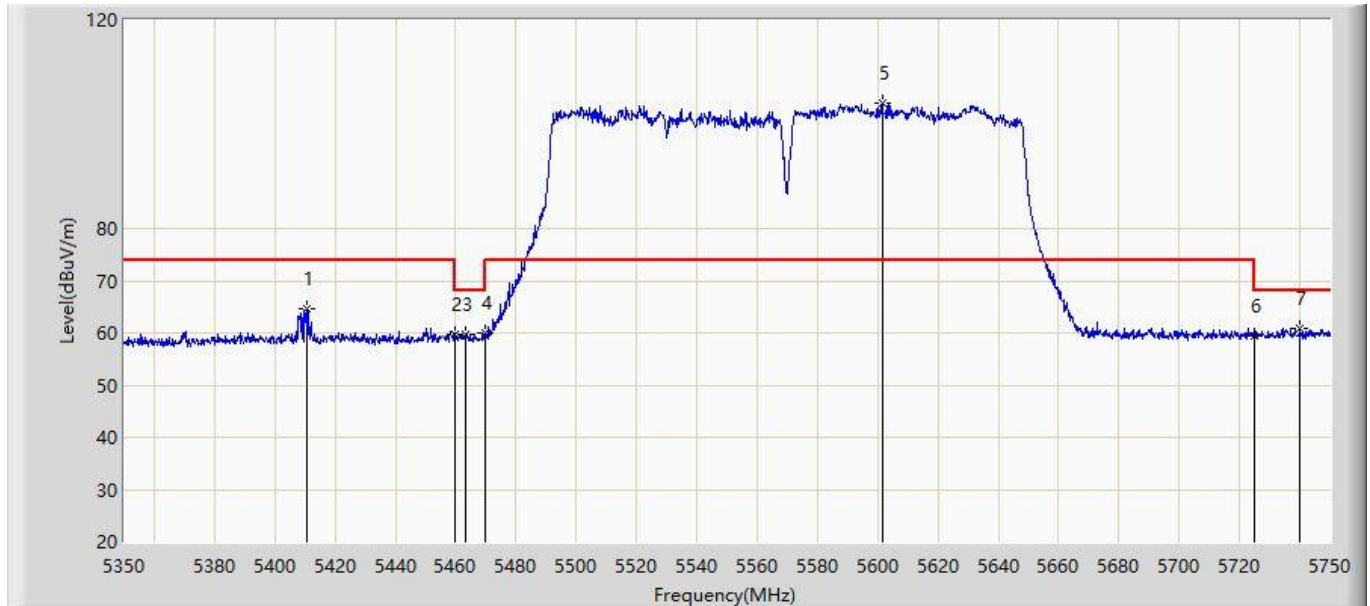


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5410.600	64.584	60.771	-9.416	74.000	3.813	PK
2			5460.000	59.684	55.840	-14.316	74.000	3.844	PK
3			5463.400	59.750	55.904	-8.450	68.200	3.846	PK
4			5470.000	59.982	56.131	-8.218	68.200	3.850	PK
5		*	5601.400	104.061	99.802	N/A	N/A	4.259	PK
6			5725.000	59.414	54.680	-8.786	68.200	4.734	PK
7			5740.000	61.000	56.209	-7.200	68.200	4.791	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 16:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1361D (Beam-Forming Mode)	

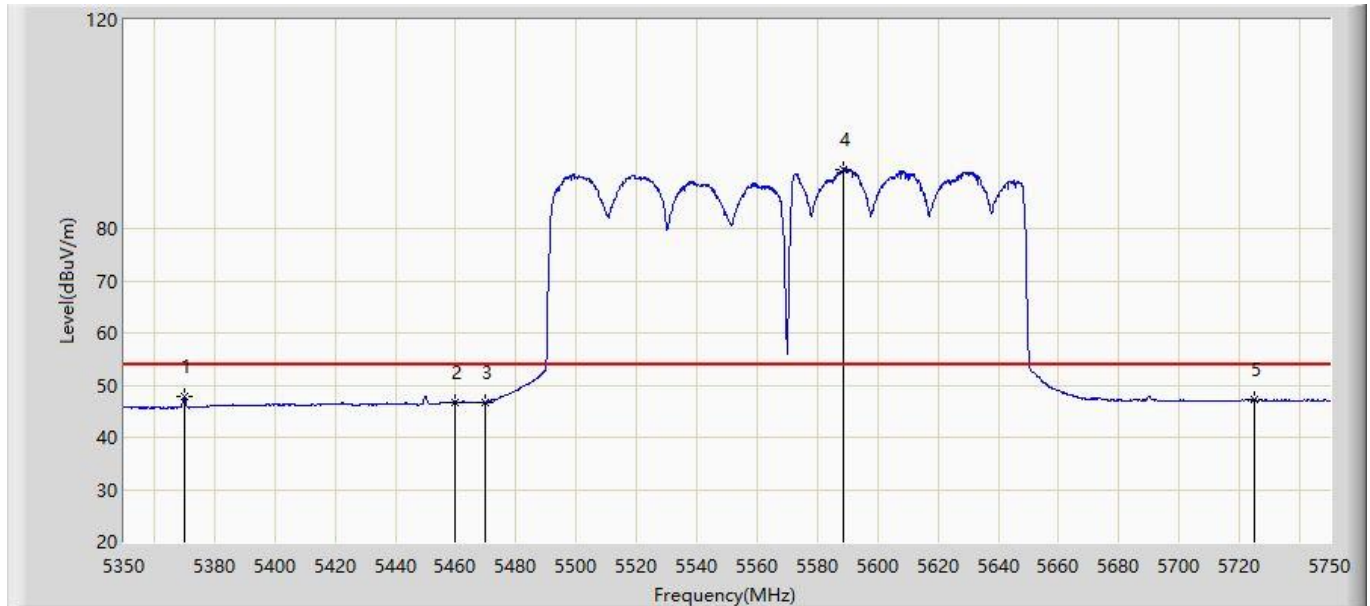


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5369.800	47.780	43.993	-6.220	54.000	3.787	AV
2			5460.000	46.809	42.965	-7.191	54.000	3.844	AV
3			5470.000	46.687	42.836	-7.313	54.000	3.850	AV
4		*	5588.400	91.291	87.082	N/A	N/A	4.209	AV
5			5725.000	47.164	42.430	-6.836	54.000	4.734	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 16:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1361D (Beam-Forming Mode)	

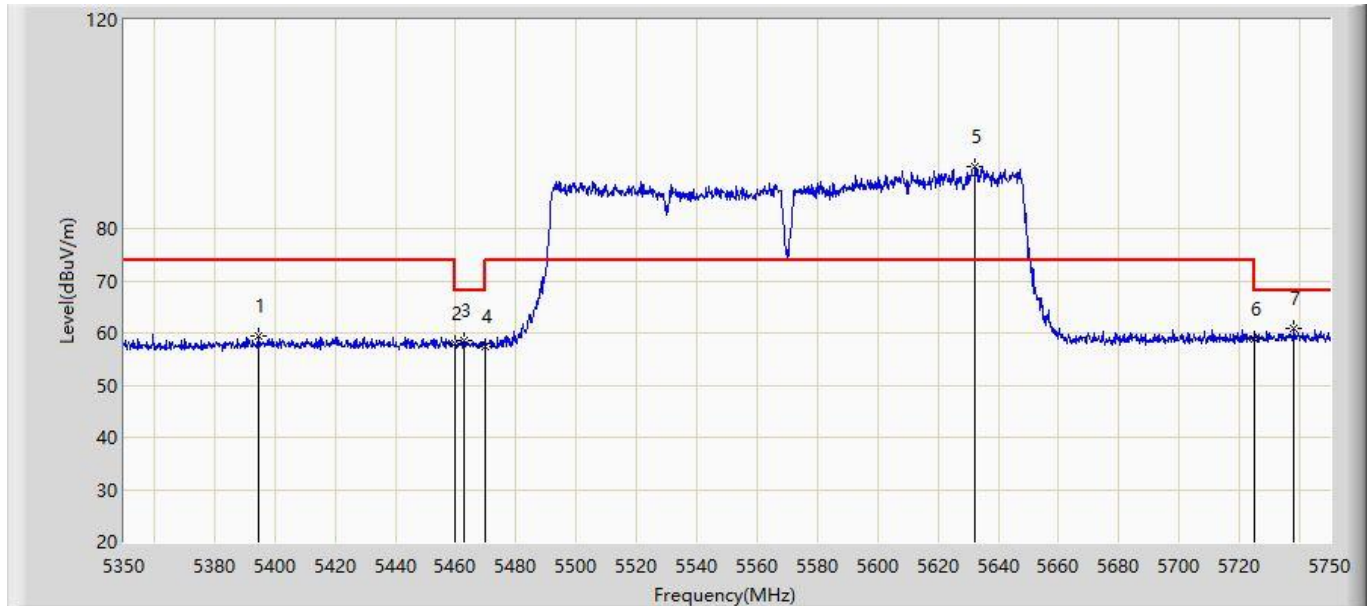


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5394.600	59.304	55.501	-14.696	74.000	3.802	PK
2			5460.000	57.955	54.111	-16.045	74.000	3.844	PK
3			5463.000	58.588	54.742	-9.612	68.200	3.846	PK
4			5470.000	57.457	53.606	-10.743	68.200	3.850	PK
5		*	5632.400	91.899	87.520	N/A	N/A	4.379	PK
6			5725.000	58.889	54.155	-9.311	68.200	4.734	PK
7			5738.200	60.747	55.963	-7.453	68.200	4.785	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 16:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1361D (Beam-Forming Mode)	

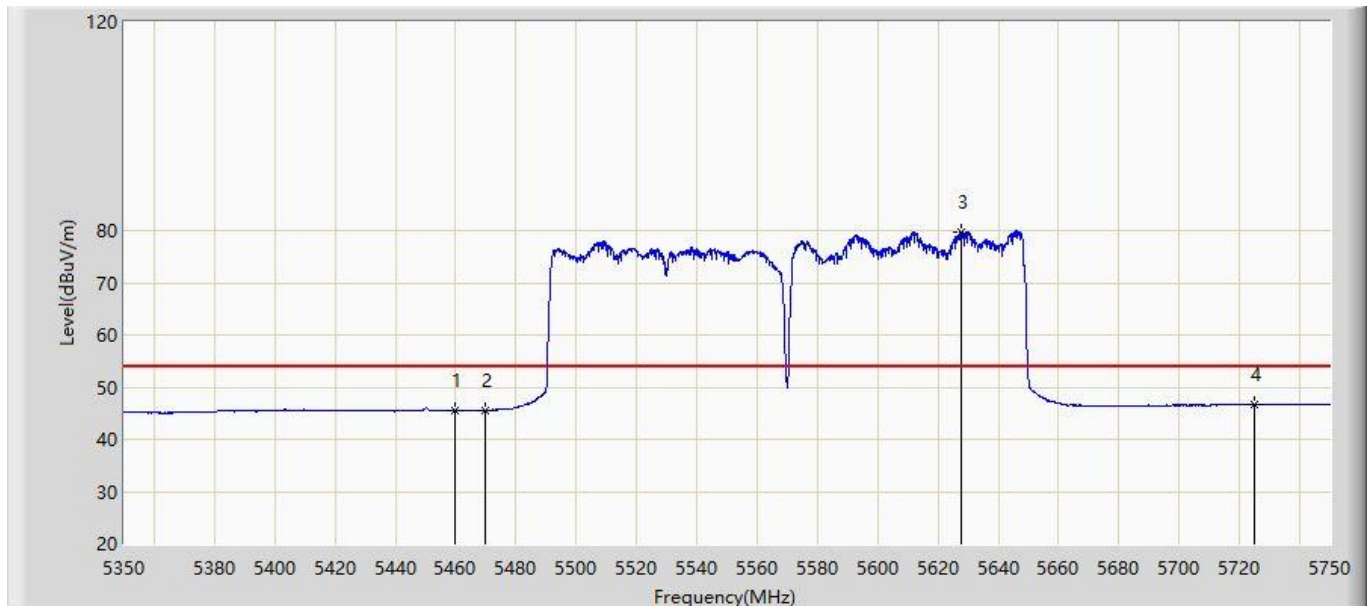


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.474	41.630	-8.526	54.000	3.844	AV
2			5470.000	45.597	41.746	-8.403	54.000	3.850	AV
3		*	5627.600	79.806	75.446	N/A	N/A	4.360	AV
4			5725.000	46.689	41.955	-7.311	54.000	4.734	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/03 - 13:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361D - Scan Antenna	

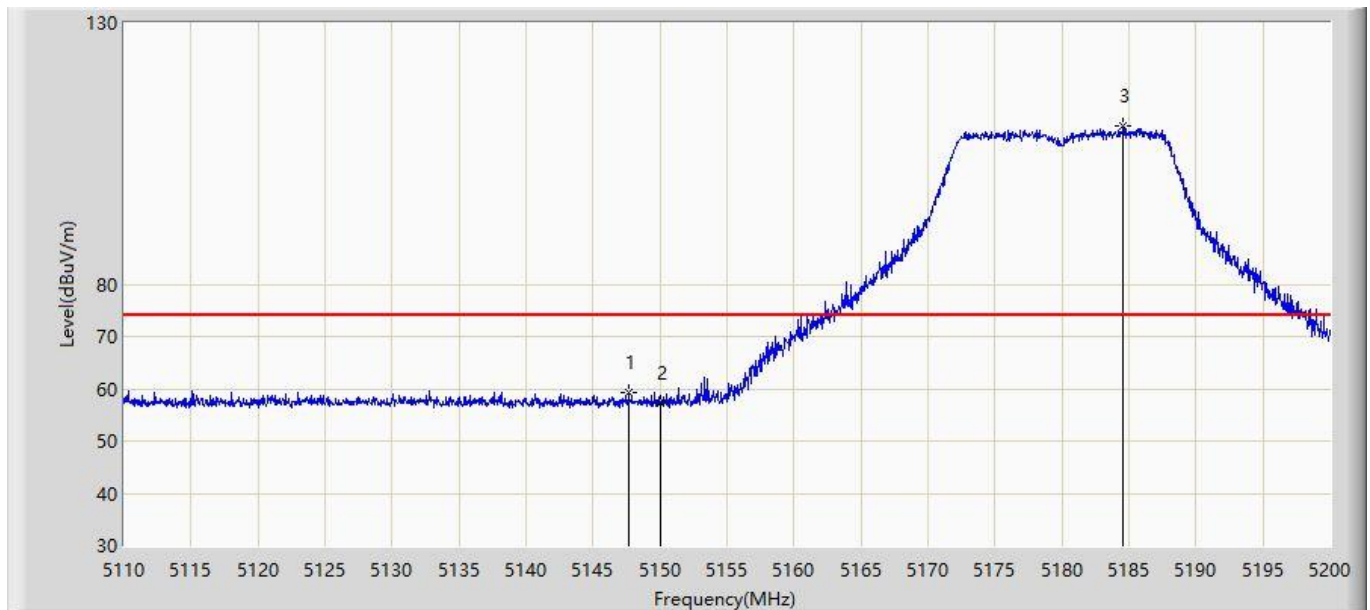


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.665	59.192	71.071	-14.808	74.000	-11.879	PK
2			5150.000	57.334	69.211	-16.666	74.000	-11.877	PK
3		*	5184.565	110.257	122.001	N/A	N/A	-11.744	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/03 - 13:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361D - Scan Antenna	

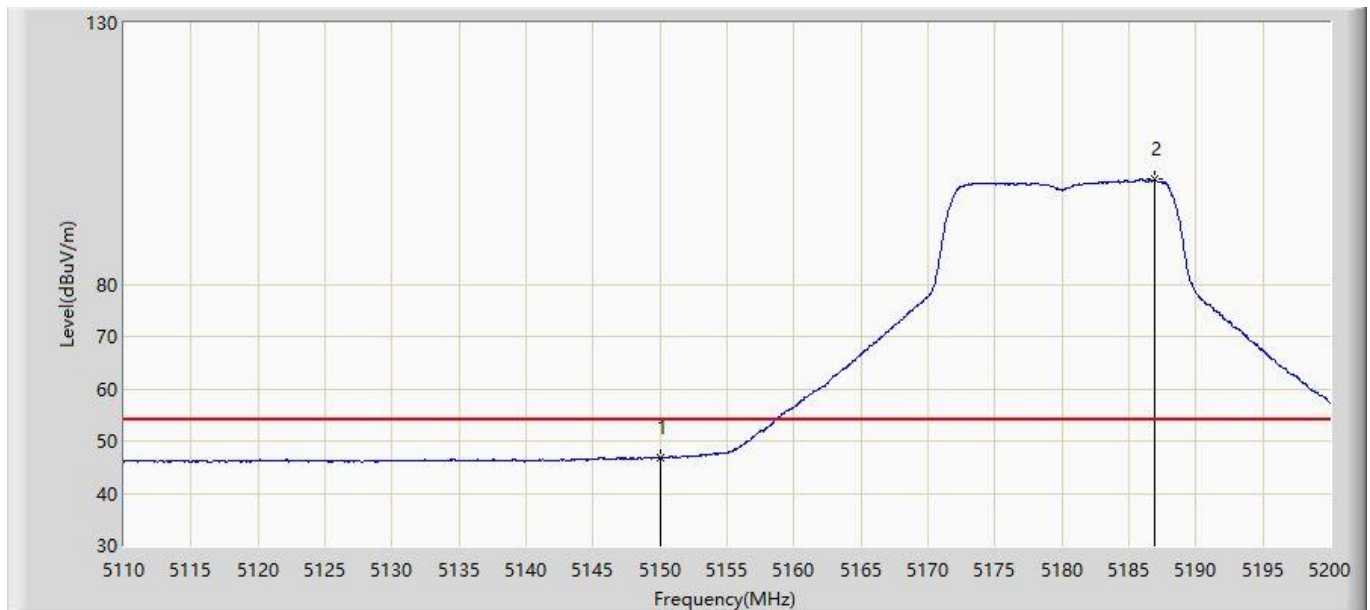


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.822	58.699	-7.178	54.000	-11.877	AV
2		*	5186.950	100.036	111.798	N/A	N/A	-11.762	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/03 - 13:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361D - Scan Antenna	

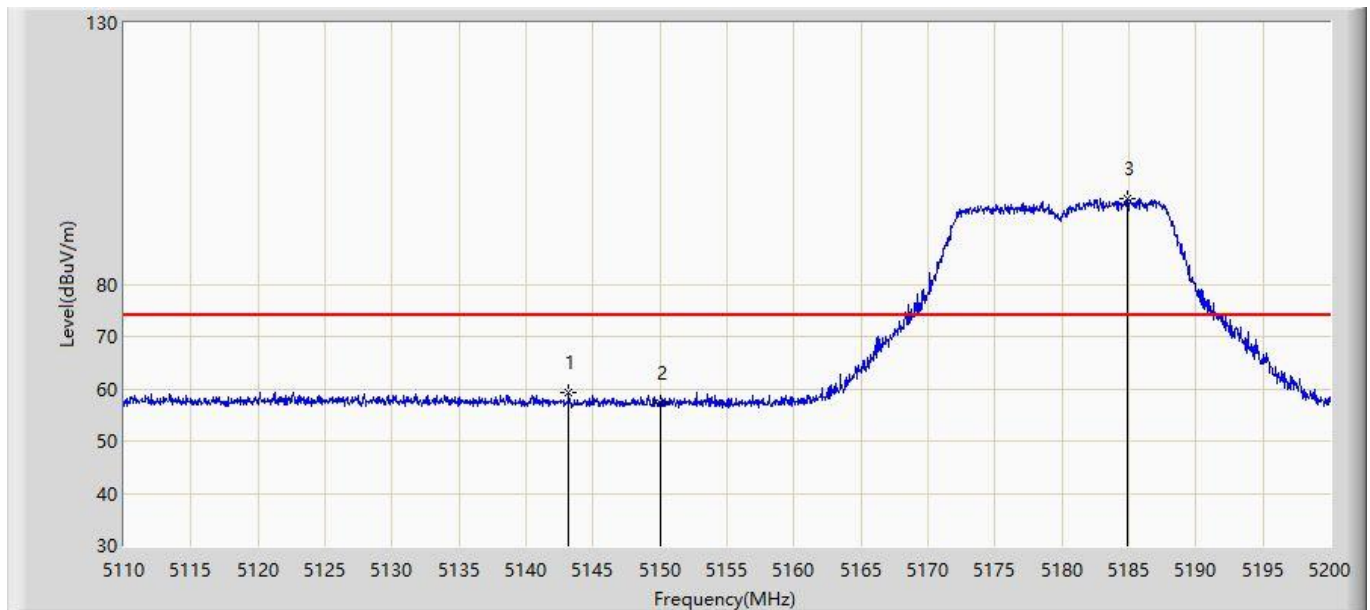


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.165	59.145	70.945	-14.855	74.000	-11.799	PK
2			5150.000	57.362	69.239	-16.638	74.000	-11.877	PK
3		*	5184.835	96.364	108.110	N/A	N/A	-11.746	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/03 - 13:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361D - Scan Antenna	

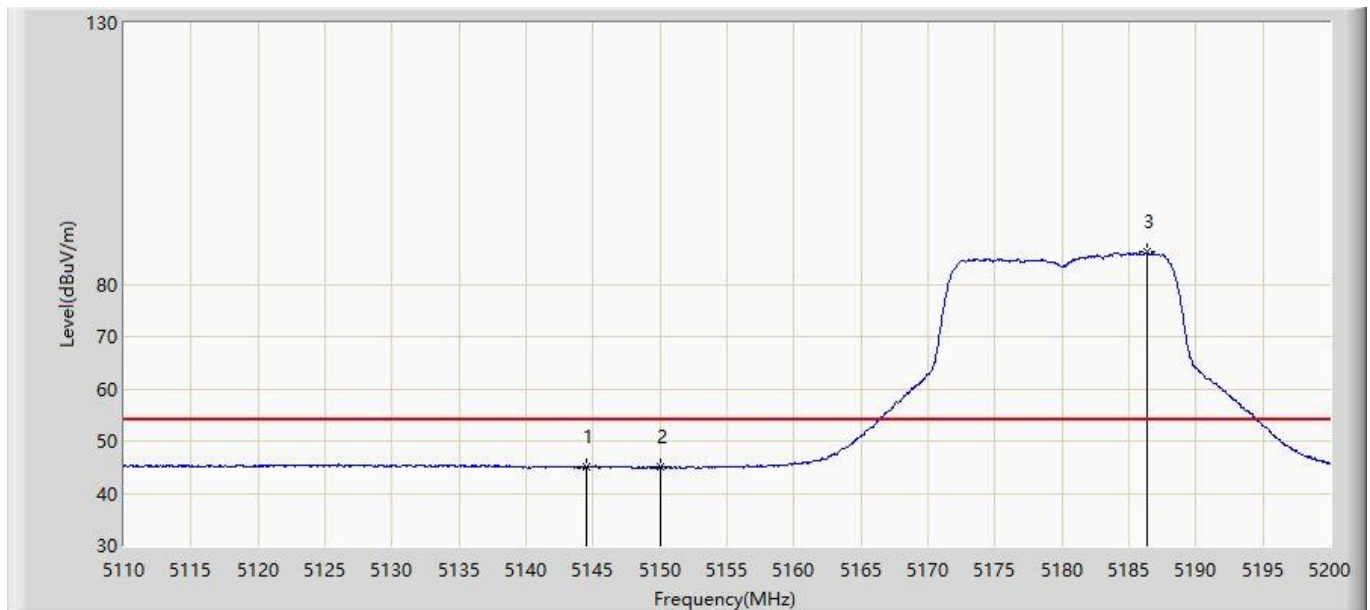


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.515	45.169	56.993	-8.831	54.000	-11.823	AV
2			5150.000	45.025	56.902	-8.975	54.000	-11.877	AV
3		*	5186.320	86.093	97.850	N/A	N/A	-11.757	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/03 - 13:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1361D - Scan Antenna	

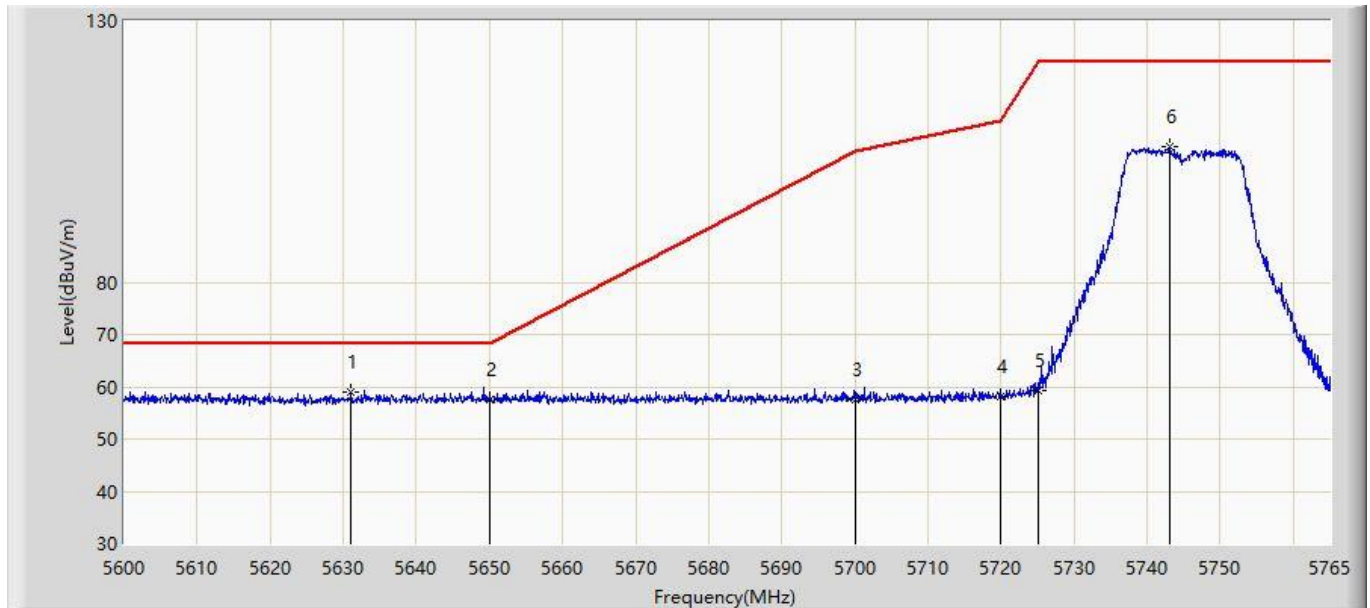


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5631.103	59.039	70.341	-9.161	68.200	-11.302	PK
2			5650.000	57.539	68.718	-10.661	68.200	-11.179	PK
3			5700.000	57.453	68.542	-47.747	105.200	-11.089	PK
4			5720.000	58.055	69.127	-52.745	110.800	-11.072	PK
5			5725.000	59.397	70.495	-62.803	122.200	-11.097	PK
6			5743.055	105.997	116.860	N/A	N/A	-10.863	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/03 - 14:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1361D - Scan Antenna	

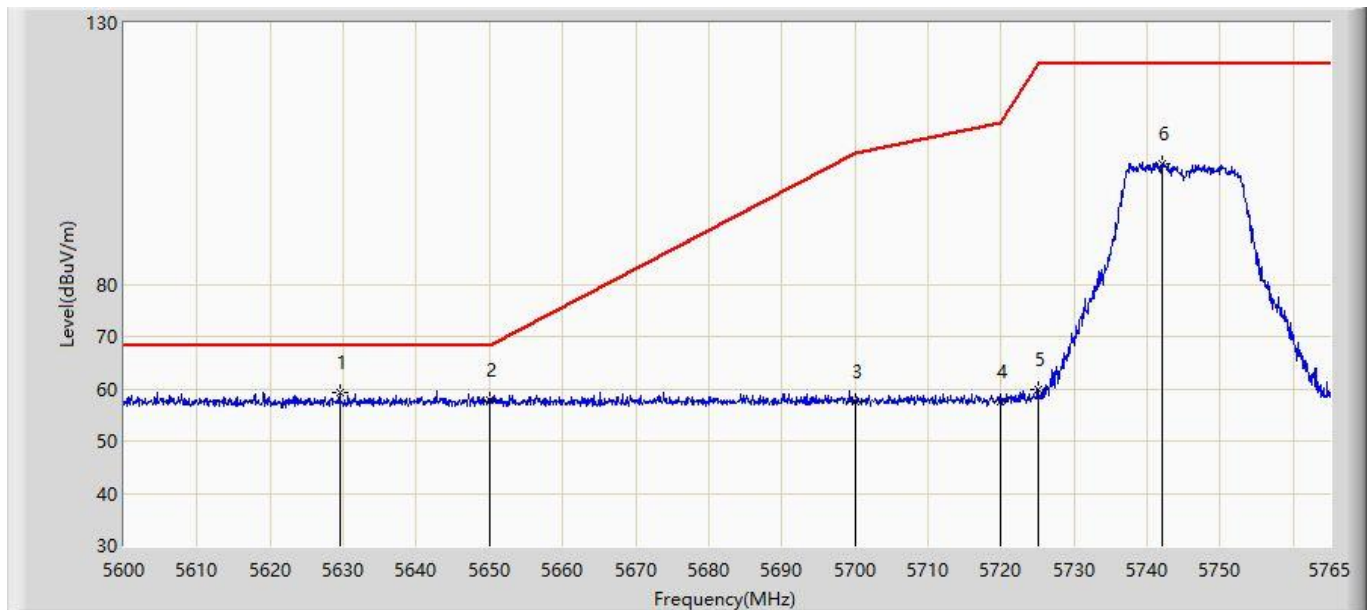


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5629.535	59.361	70.688	-8.839	68.200	-11.327	PK
2			5650.000	57.889	69.068	-10.311	68.200	-11.179	PK
3			5700.000	57.657	68.746	-47.543	105.200	-11.089	PK
4			5720.000	57.467	68.539	-53.333	110.800	-11.072	PK
5			5725.000	59.853	70.951	-62.347	122.200	-11.097	PK
6			5742.065	103.172	114.048	N/A	N/A	-10.877	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/03 - 14:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1361D - Scan Antenna	

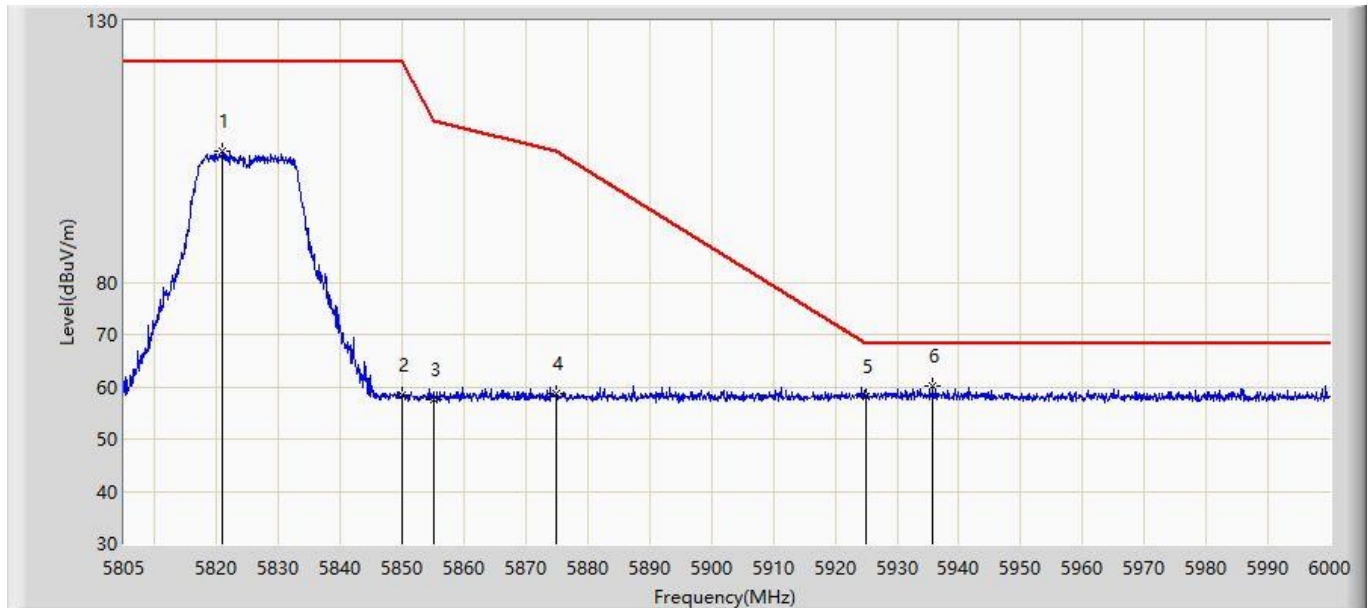


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5820.990	105.143	115.657	N/A	N/A	-10.514	PK
2			5850.000	58.447	68.899	-63.753	122.200	-10.452	PK
3			5855.000	57.664	68.033	-53.136	110.800	-10.368	PK
4			5875.000	58.763	69.083	-46.437	105.200	-10.320	PK
5			5925.000	58.011	68.111	-10.189	68.200	-10.100	PK
6		*	5935.748	60.283	70.349	-7.917	68.200	-10.066	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/03 - 14:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1361D - Scan Antenna	

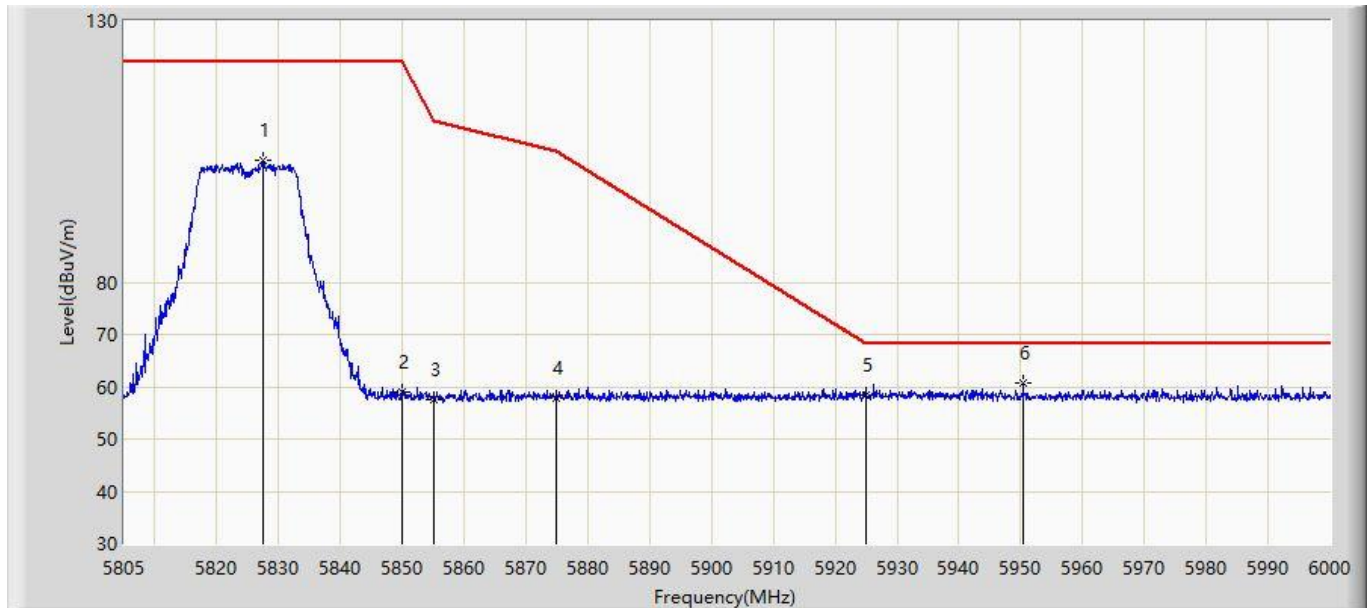


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5827.425	103.314	113.901	N/A	N/A	-10.588	PK
2			5850.000	59.035	69.487	-63.165	122.200	-10.452	PK
3			5855.000	57.670	68.039	-53.130	110.800	-10.368	PK
4			5875.000	57.725	68.045	-47.475	105.200	-10.320	PK
5			5925.000	58.502	68.602	-9.698	68.200	-10.100	PK
6		*	5950.373	60.851	71.095	-7.349	68.200	-10.243	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Mode No.: OAW-AP1362

Site: AC1	Time: 2020/03/19 - 15:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1362 (CDD Mode)	

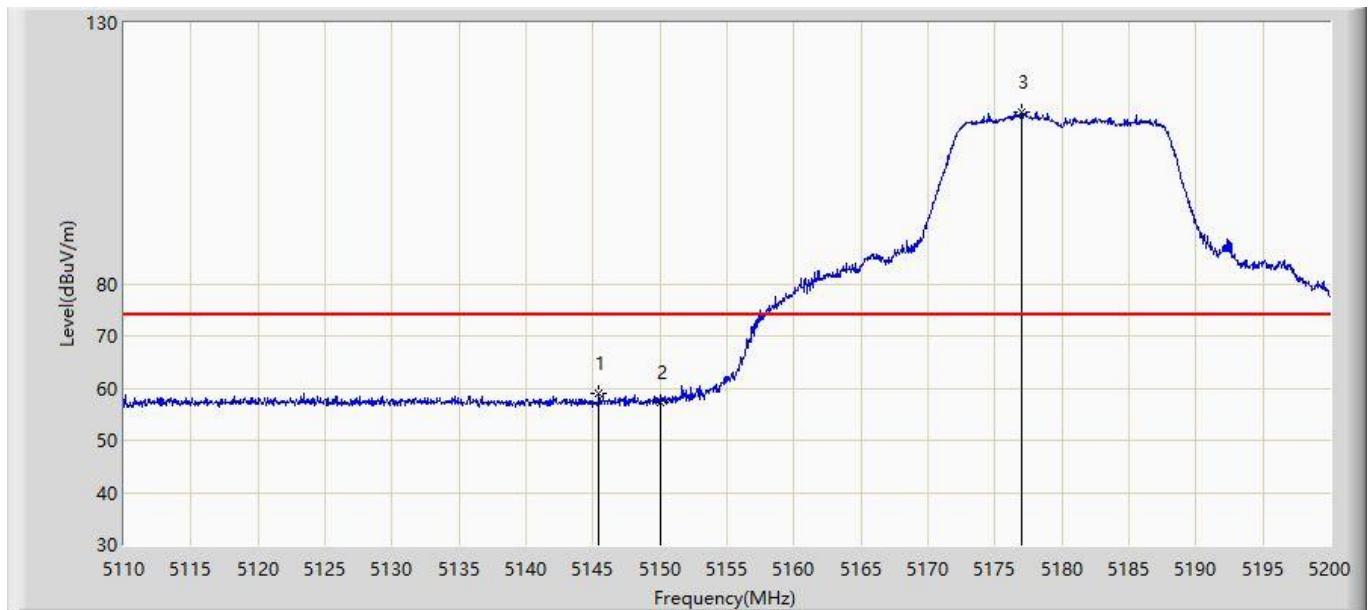

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.415	58.951	55.308	-15.049	74.000	3.643	PK
2			5150.000	57.301	53.655	-16.699	74.000	3.646	PK
3		*	5176.960	112.807	109.144	N/A	N/A	3.663	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.253	41.607	-8.747	54.000	3.646	AV
2		*	5178.085	101.903	98.239	N/A	N/A	3.664	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1362 (CDD Mode)	

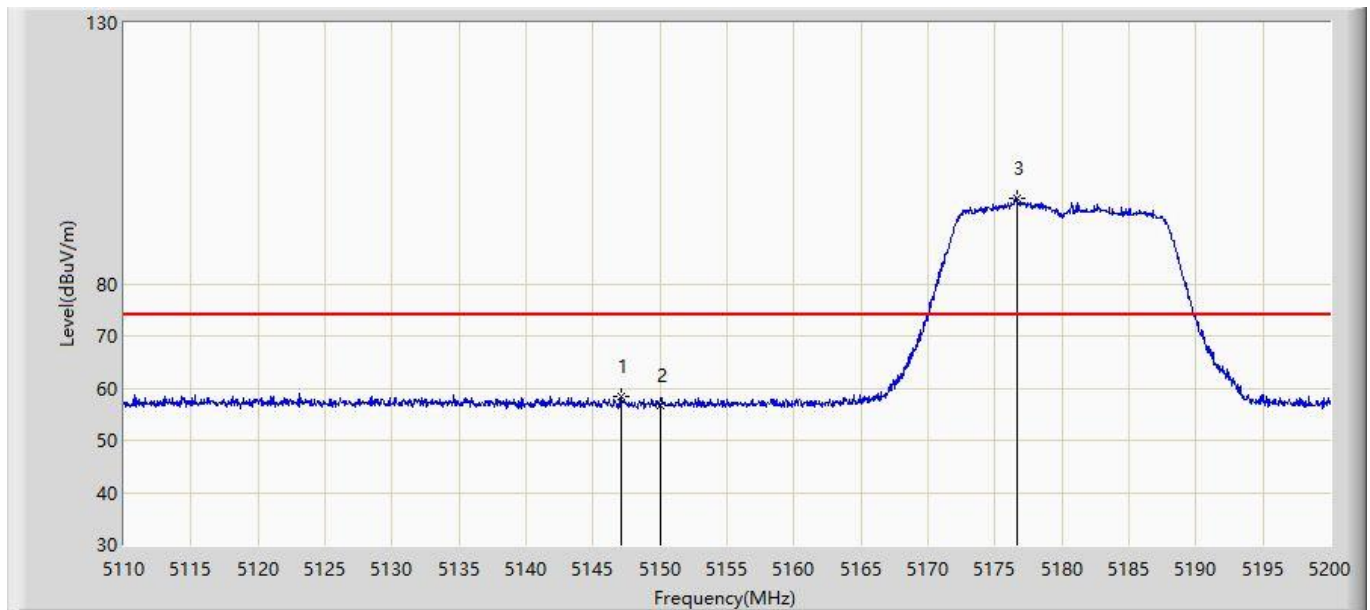


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.080	58.437	54.793	-15.563	74.000	3.644	PK
2			5150.000	56.572	52.926	-17.428	74.000	3.646	PK
3		*	5176.690	96.483	92.820	N/A	N/A	3.662	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1362 (CDD Mode)	

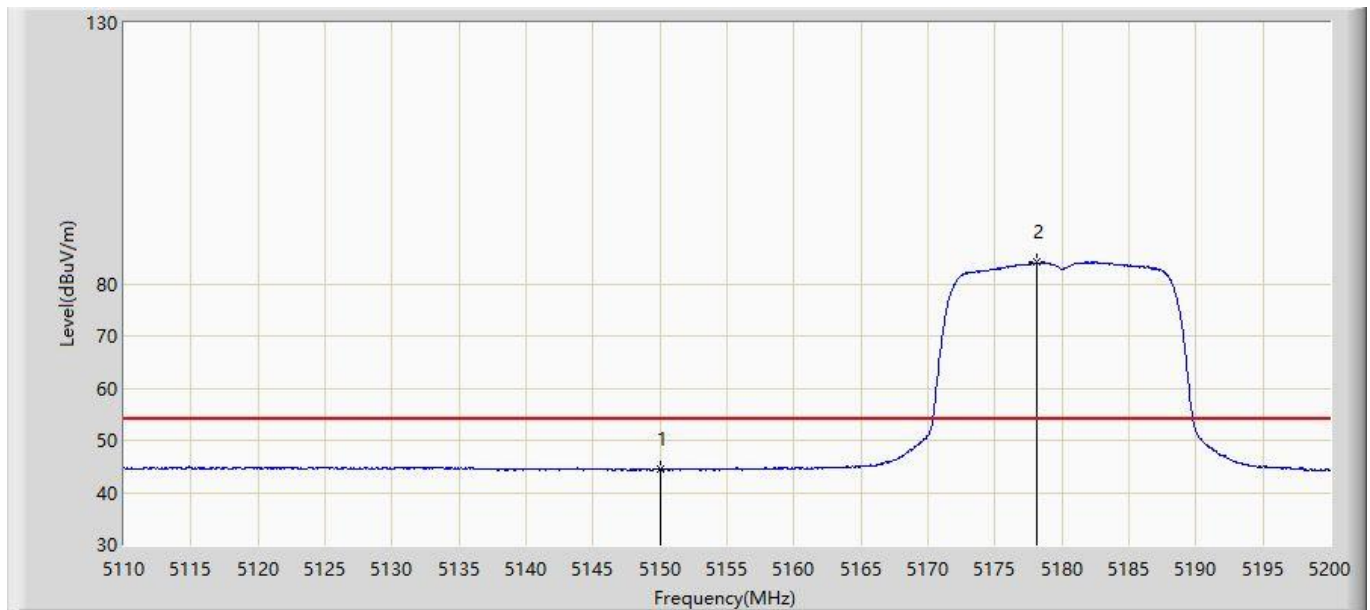


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.388	40.742	-9.612	54.000	3.646	AV
2		*	5178.130	84.062	80.398	N/A	N/A	3.664	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1362 (CDD Mode)	

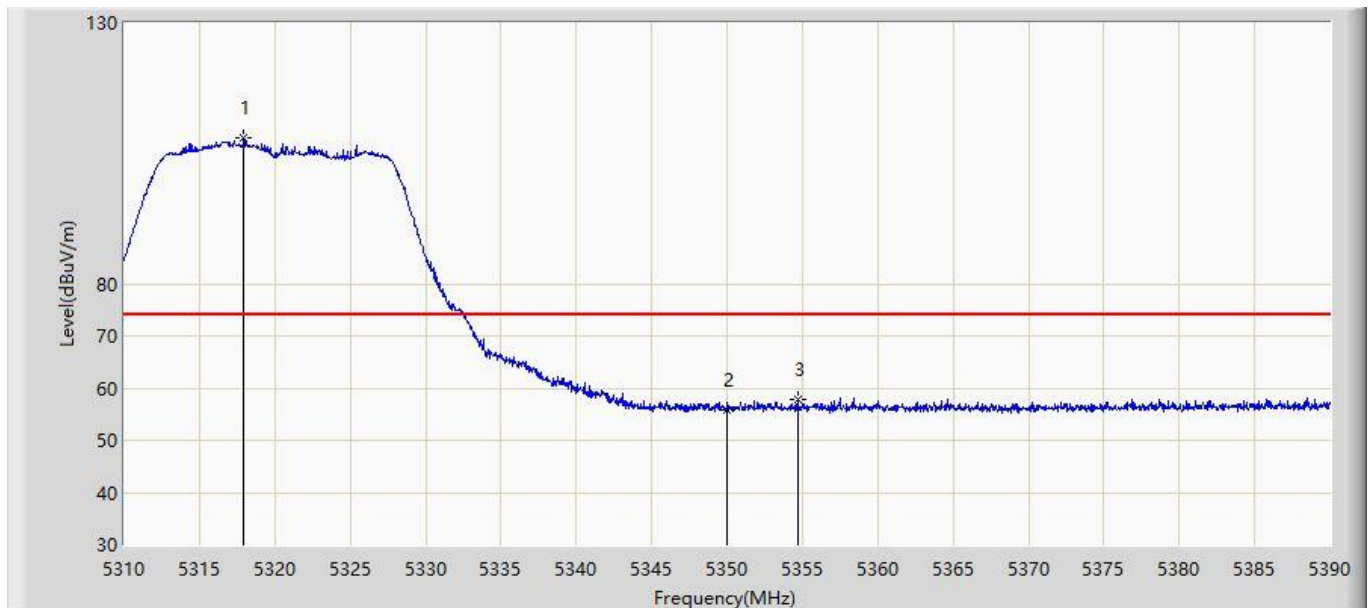


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.960	107.937	104.183	N/A	N/A	3.754	PK
2			5350.000	55.916	52.142	-18.084	74.000	3.774	PK
3			5354.720	57.858	54.081	-16.142	74.000	3.777	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1362 (CDD Mode)	

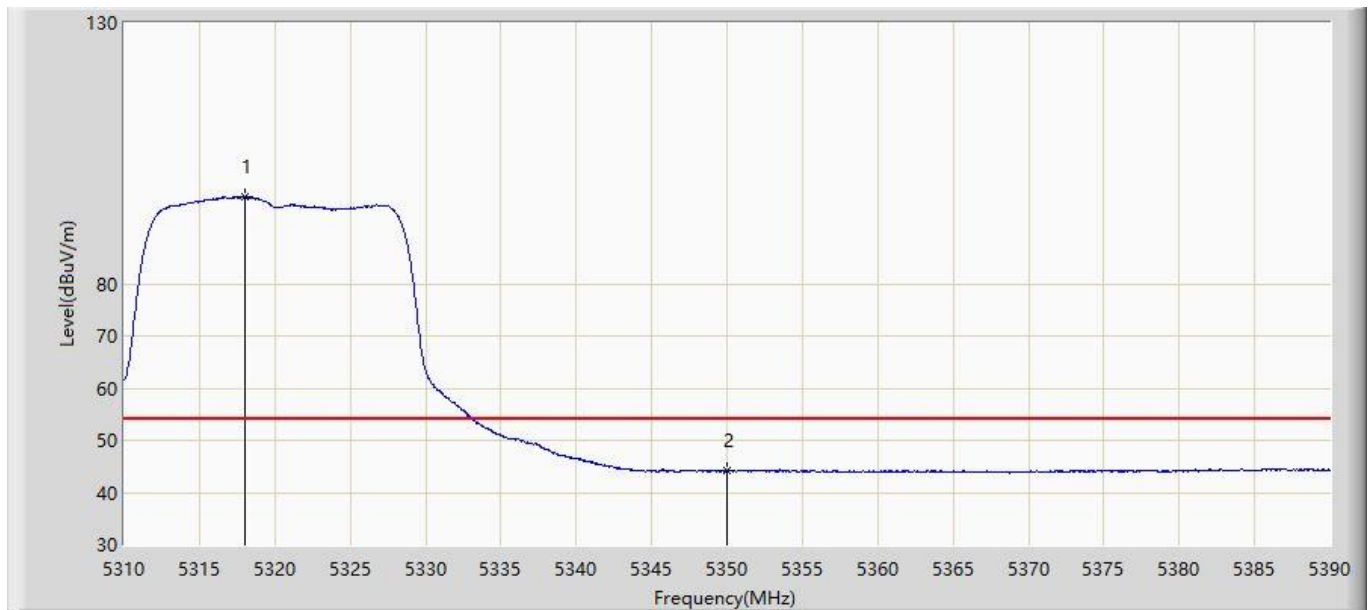


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.000	96.634	92.880	N/A	N/A	3.754	AV
2			5350.000	44.338	40.564	-9.662	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1362 (CDD Mode)	

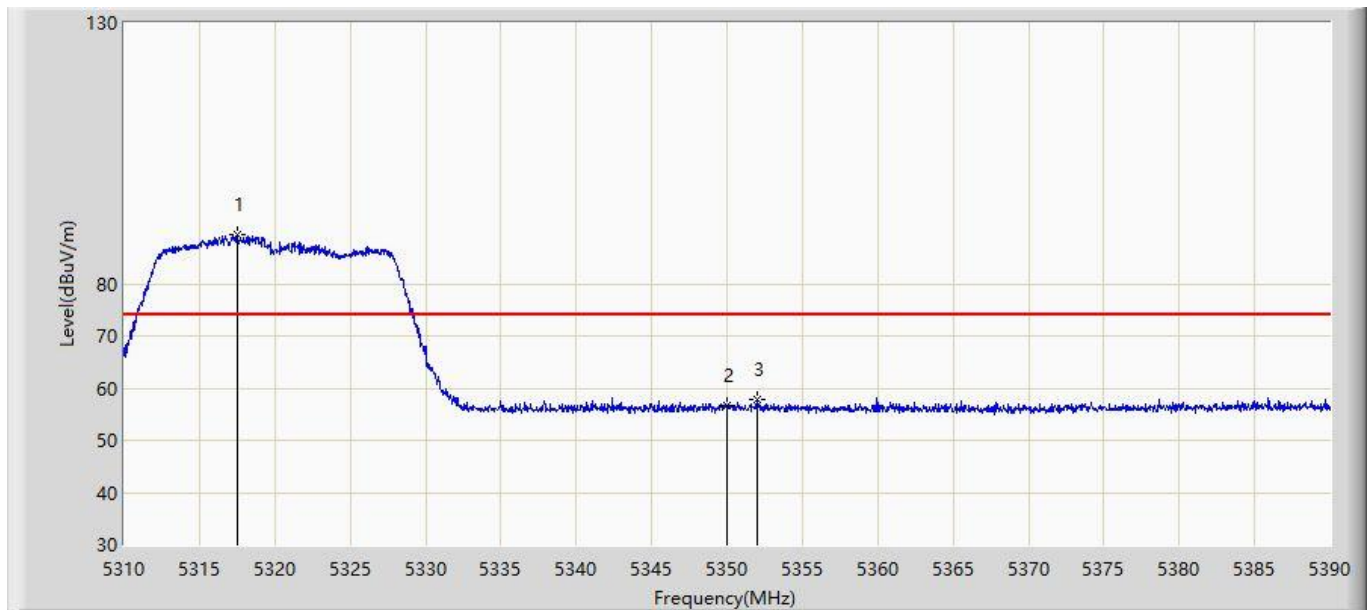


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.480	89.374	85.620	N/A	N/A	3.754	PK
2			5350.000	56.695	52.921	-17.305	74.000	3.774	PK
3			5352.040	57.950	54.175	-16.050	74.000	3.775	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1362 (CDD Mode)	

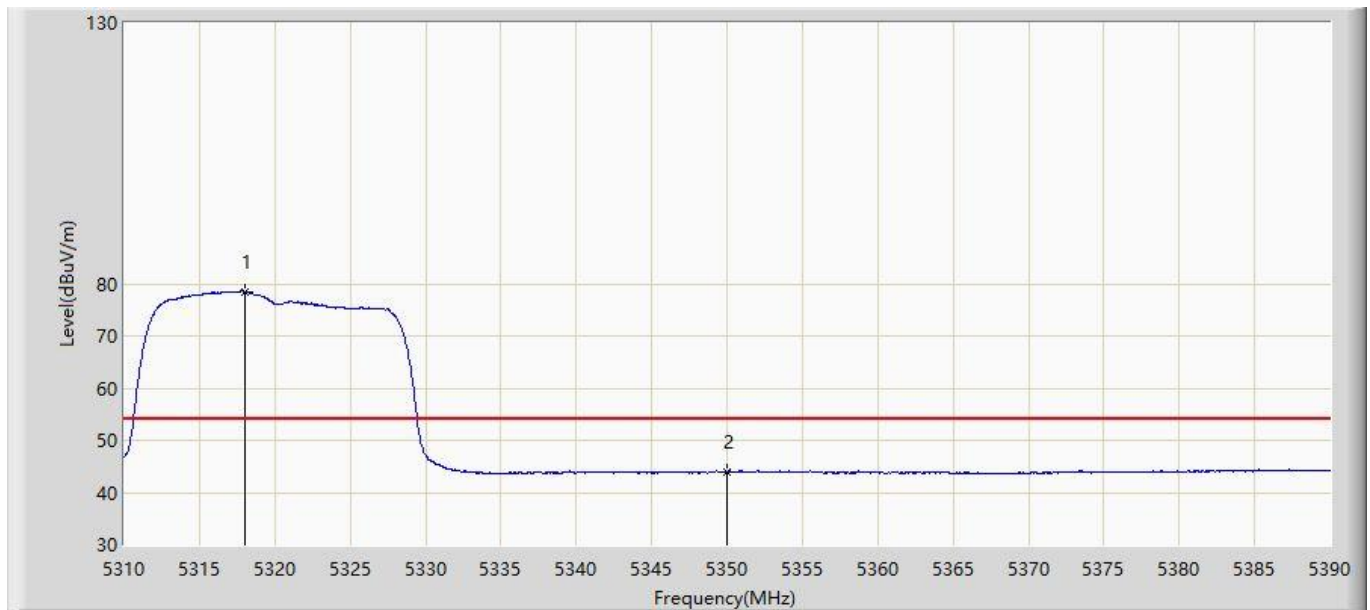


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.040	78.323	74.569	N/A	N/A	3.754	AV
2			5350.000	43.896	40.122	-10.104	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1362 (CDD Mode)	

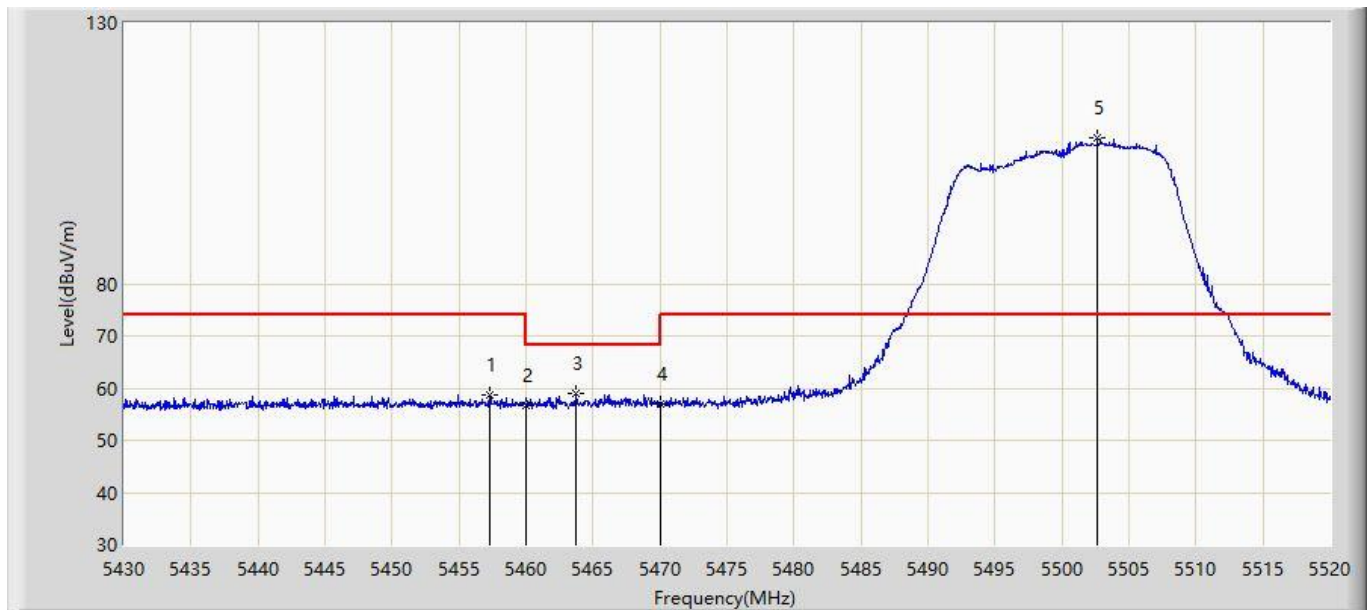


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.270	58.592	54.750	-15.408	74.000	3.842	PK
2			5460.000	56.614	52.770	-17.386	74.000	3.844	PK
3			5463.750	59.075	55.229	-9.125	68.200	3.846	PK
4			5470.000	57.060	53.209	-11.140	68.200	3.850	PK
5		*	5502.630	107.996	104.110	N/A	N/A	3.886	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1362 (CDD Mode)	

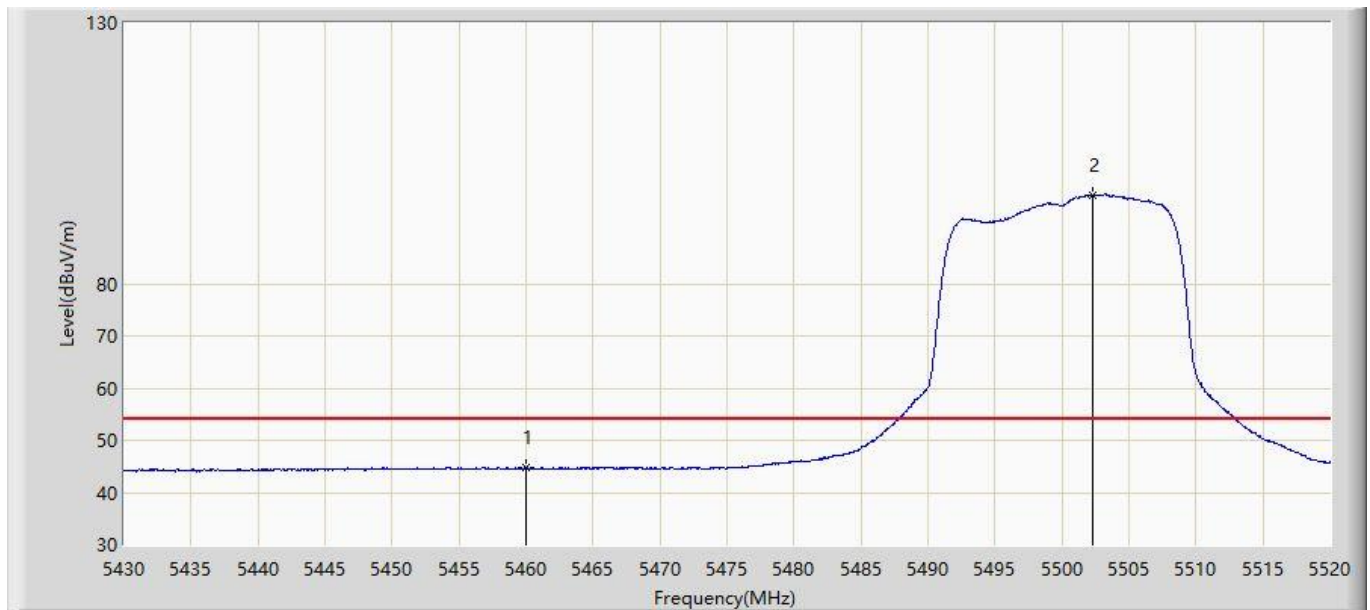


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.739	40.895	-9.261	54.000	3.844	AV
2		*	5502.315	96.947	93.062	N/A	N/A	3.885	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1362 (CDD Mode)	

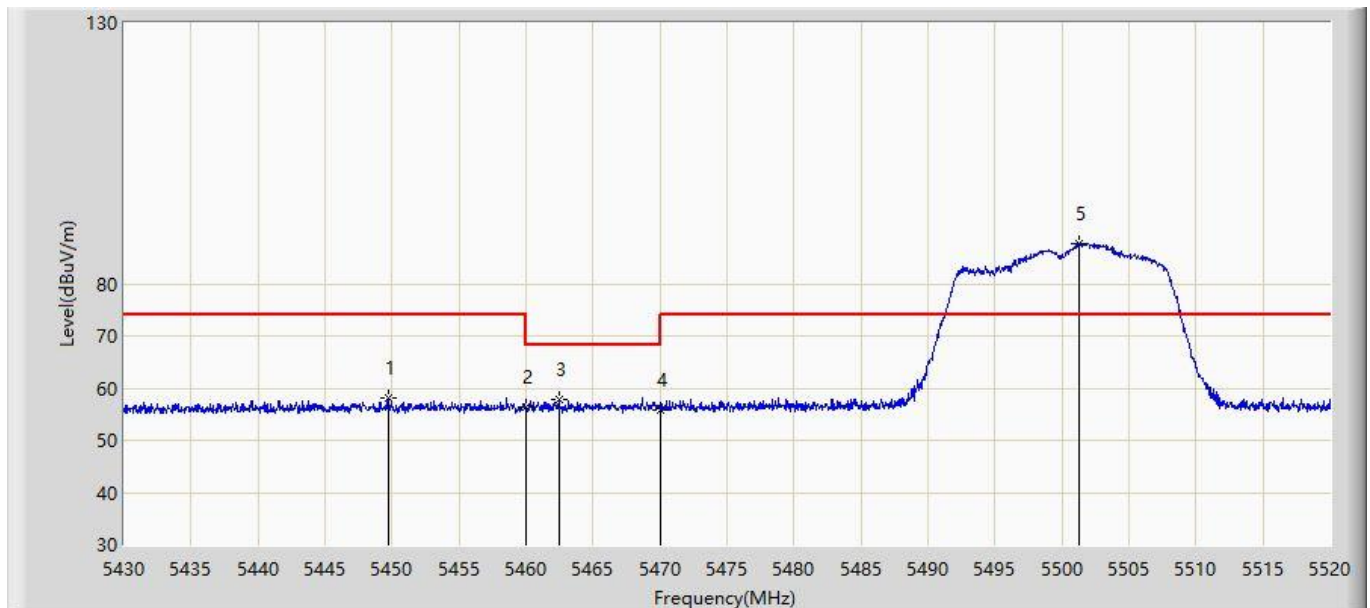


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.755	58.117	54.280	-15.883	74.000	3.837	PK
2			5460.000	56.407	52.563	-17.593	74.000	3.844	PK
3			5462.445	57.802	53.956	-10.398	68.200	3.845	PK
4			5470.000	55.785	51.934	-12.415	68.200	3.850	PK
5		*	5501.325	87.729	83.845	N/A	N/A	3.883	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1362 (CDD Mode)	

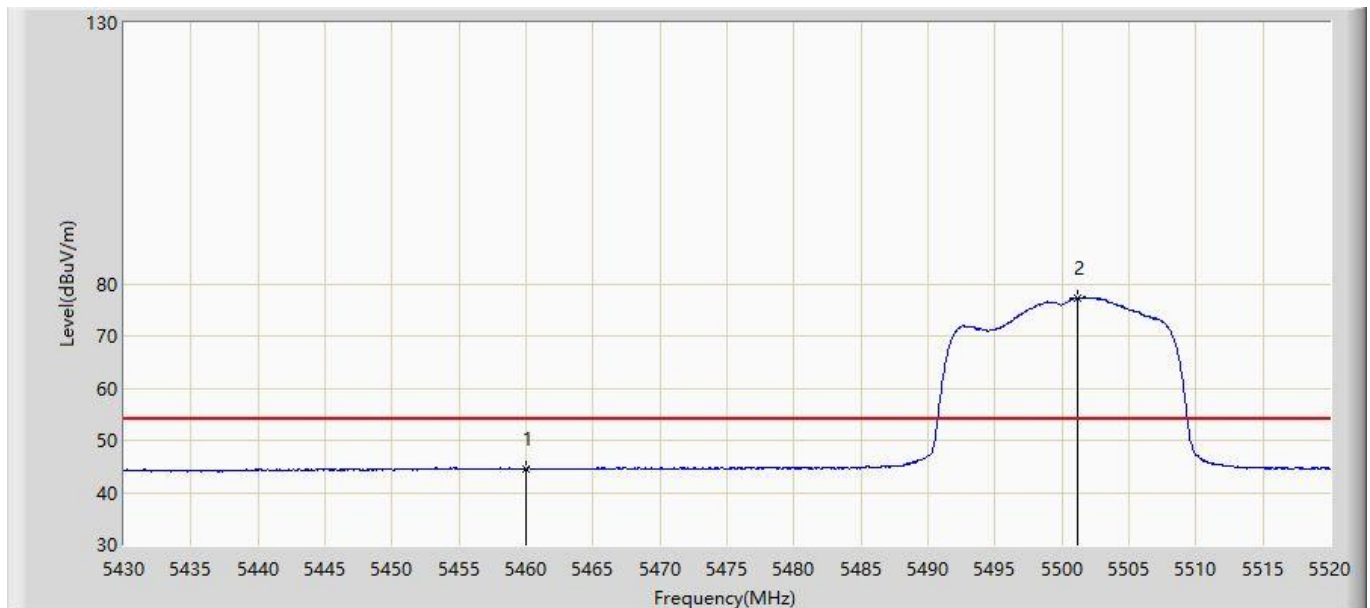


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.521	40.677	-9.479	54.000	3.844	AV
2		*	5501.190	77.368	73.484	N/A	N/A	3.883	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz with OAW-AP1362 (CDD Mode)	

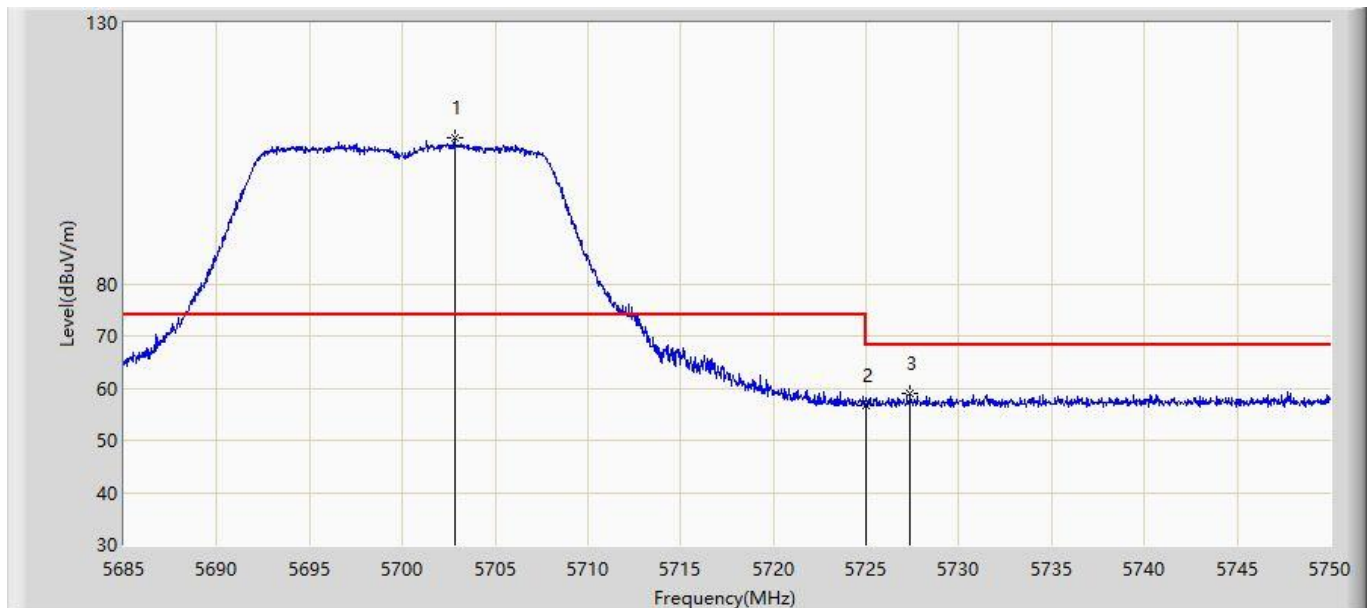


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.810	108.096	103.447	N/A	N/A	4.648	PK
2			5725.000	56.662	51.928	-11.538	68.200	4.734	PK
3			5727.380	58.894	54.151	-9.306	68.200	4.743	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz with OAW-AP1362 (CDD Mode)	

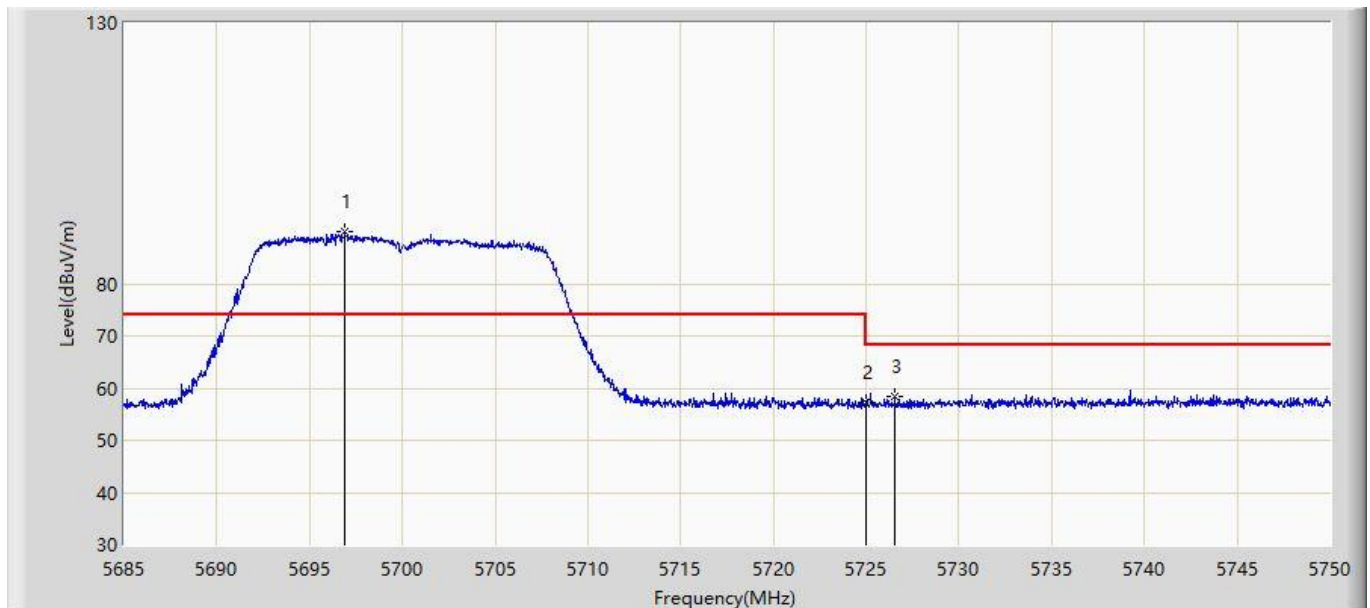


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.895	89.886	85.260	N/A	N/A	4.626	PK
2			5725.000	57.102	52.368	-11.098	68.200	4.734	PK
3			5726.535	58.426	53.686	-9.774	68.200	4.740	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1362 (CDD Mode)	

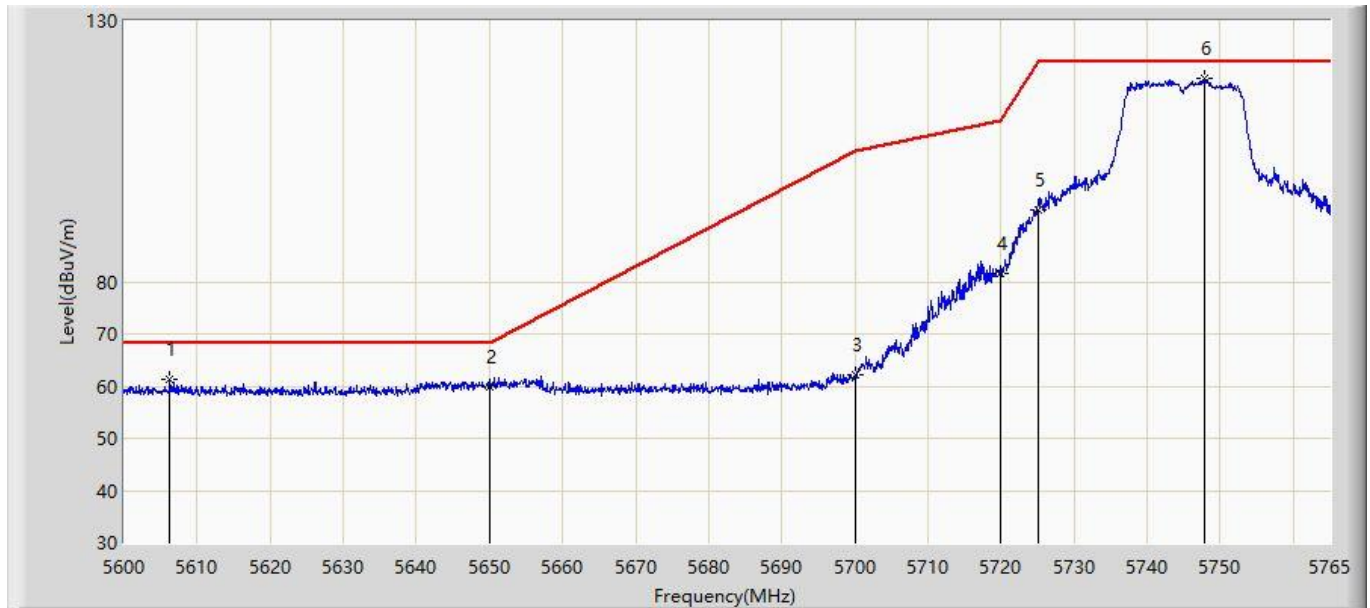


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5606.270	61.207	56.929	-6.993	68.200	4.278	PK
2			5650.000	59.976	55.530	-8.224	68.200	4.446	PK
3			5700.000	62.169	57.531	-43.031	105.200	4.638	PK
4			5720.000	81.667	76.952	-29.133	110.800	4.715	PK
5			5725.000	93.647	88.913	-28.553	122.200	4.734	PK
6		*	5747.922	119.115	114.293	N/A	N/A	4.822	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1362 (CDD Mode)	

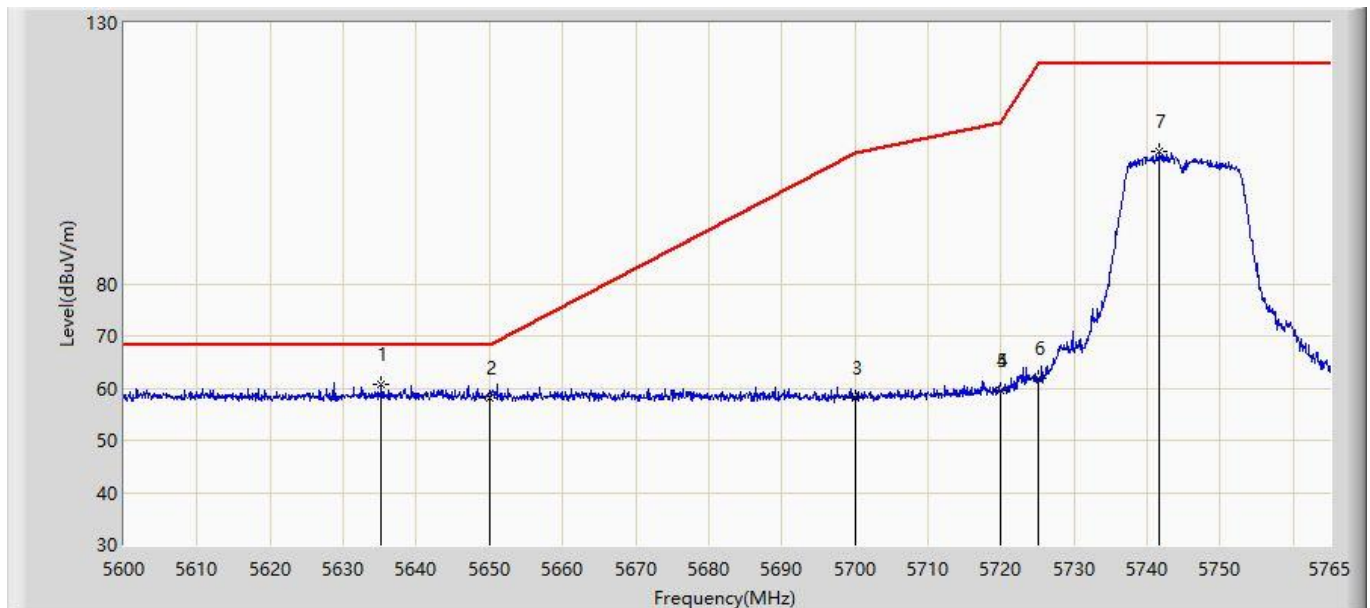


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5635.228	60.598	56.208	-7.602	68.200	4.389	PK
2			5650.000	58.138	53.692	-10.062	68.200	4.446	PK
3			5700.000	58.152	53.514	-47.048	105.200	4.638	PK
4			5720.000	59.483	54.768	-51.317	110.800	4.715	PK
5			5720.000	59.483	54.768	-51.317	110.800	4.715	PK
6			5725.000	61.886	57.152	-60.314	122.200	4.734	PK
7			5741.652	105.439	100.641	N/A	N/A	4.798	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1362 (CDD Mode)	

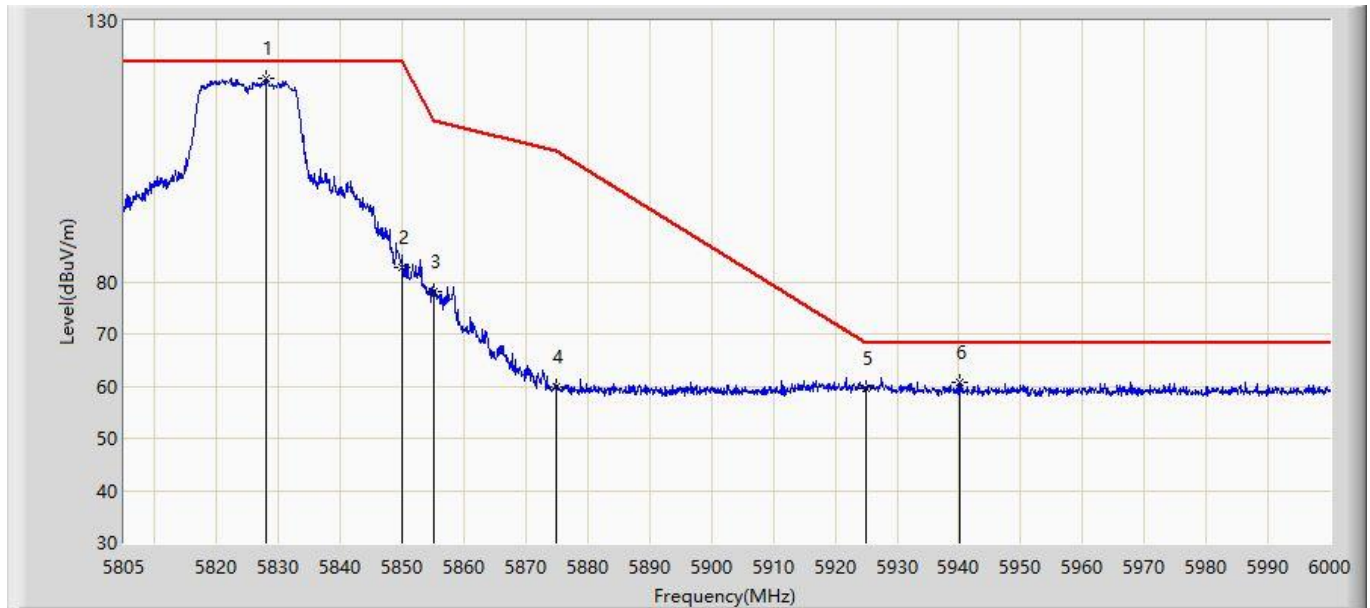


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.010	118.940	113.810	N/A	N/A	5.130	PK
2			5850.000	82.885	77.671	-39.315	122.200	5.214	PK
3			5855.000	78.130	72.897	-32.670	110.800	5.233	PK
4			5875.000	59.978	54.668	-45.222	105.200	5.310	PK
5			5925.000	59.509	54.007	-8.691	68.200	5.502	PK
6			5940.135	60.634	55.073	-7.566	68.200	5.560	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1362 (CDD Mode)	

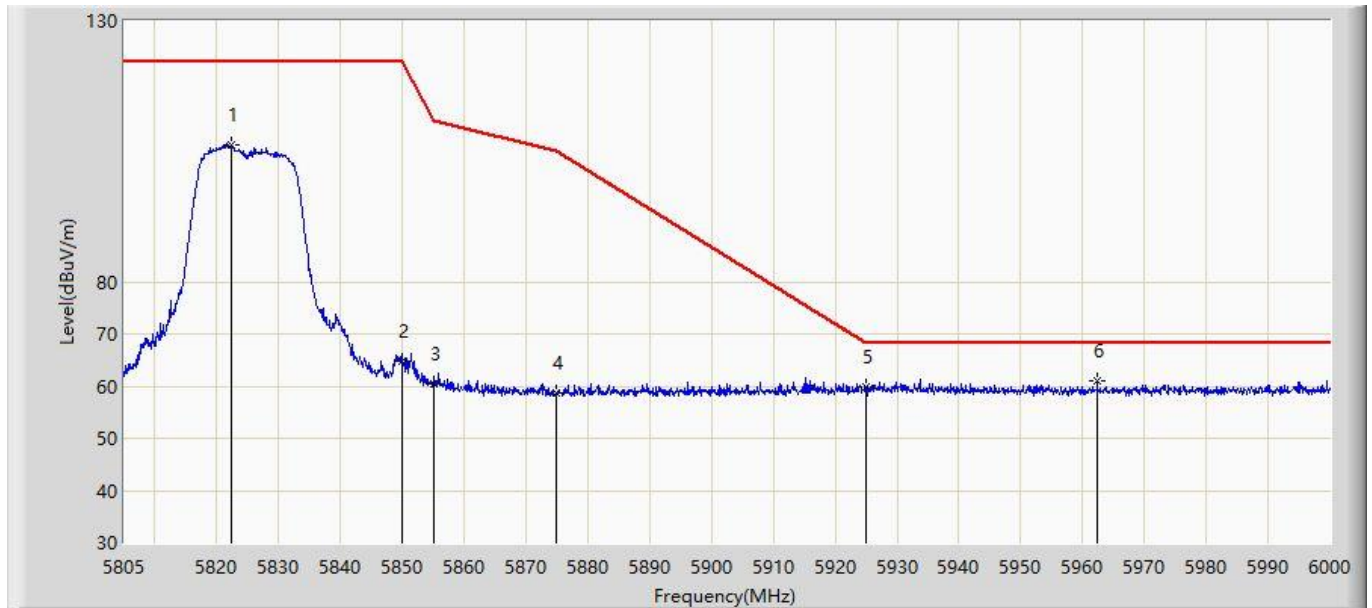


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5822.453	106.260	101.152	N/A	N/A	5.108	PK
2			5850.000	64.722	59.508	-57.478	122.200	5.214	PK
3			5855.000	60.457	55.224	-50.343	110.800	5.233	PK
4			5875.000	58.633	53.323	-46.567	105.200	5.310	PK
5			5925.000	59.839	54.337	-8.361	68.200	5.502	PK
6		*	5962.365	60.875	55.229	-7.325	68.200	5.646	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1362 (CDD Mode)	

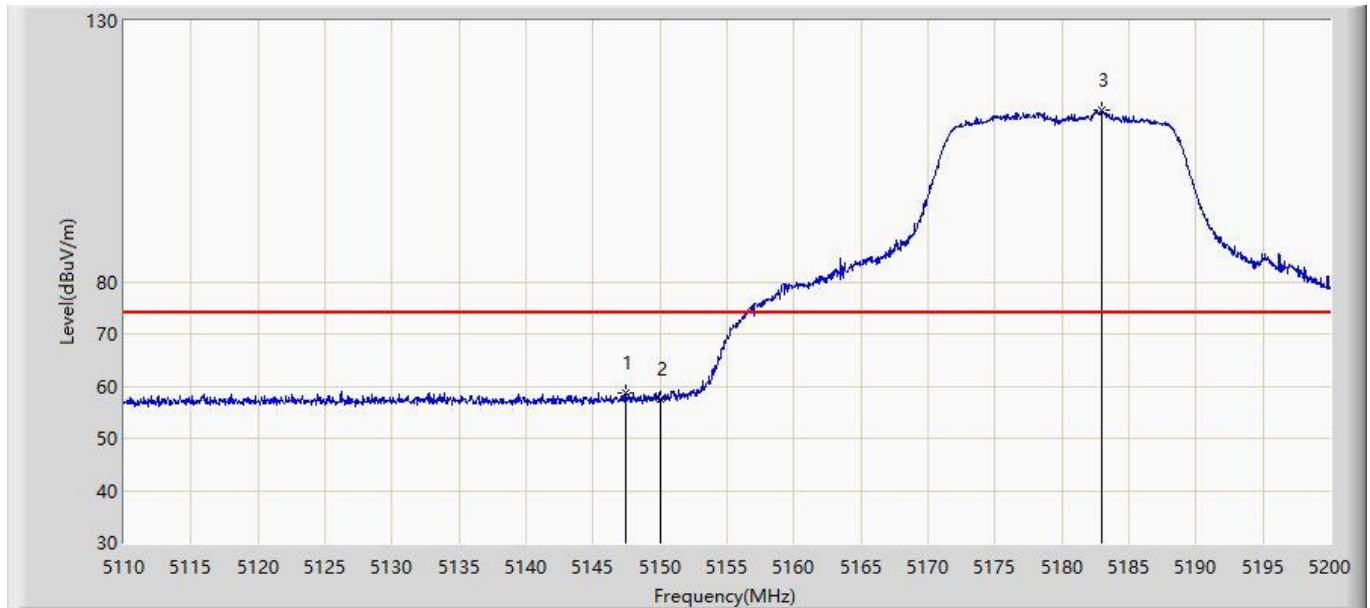

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.440	58.744	55.099	-15.256	74.000	3.645	PK
2			5150.000	57.474	53.828	-16.526	74.000	3.646	PK
3		*	5182.945	112.831	109.164	N/A	N/A	3.667	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.897	41.251	-9.103	54.000	3.646	AV
2		*	5178.670	100.747	97.083	N/A	N/A	3.664	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 15:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1362 (CDD Mode)	

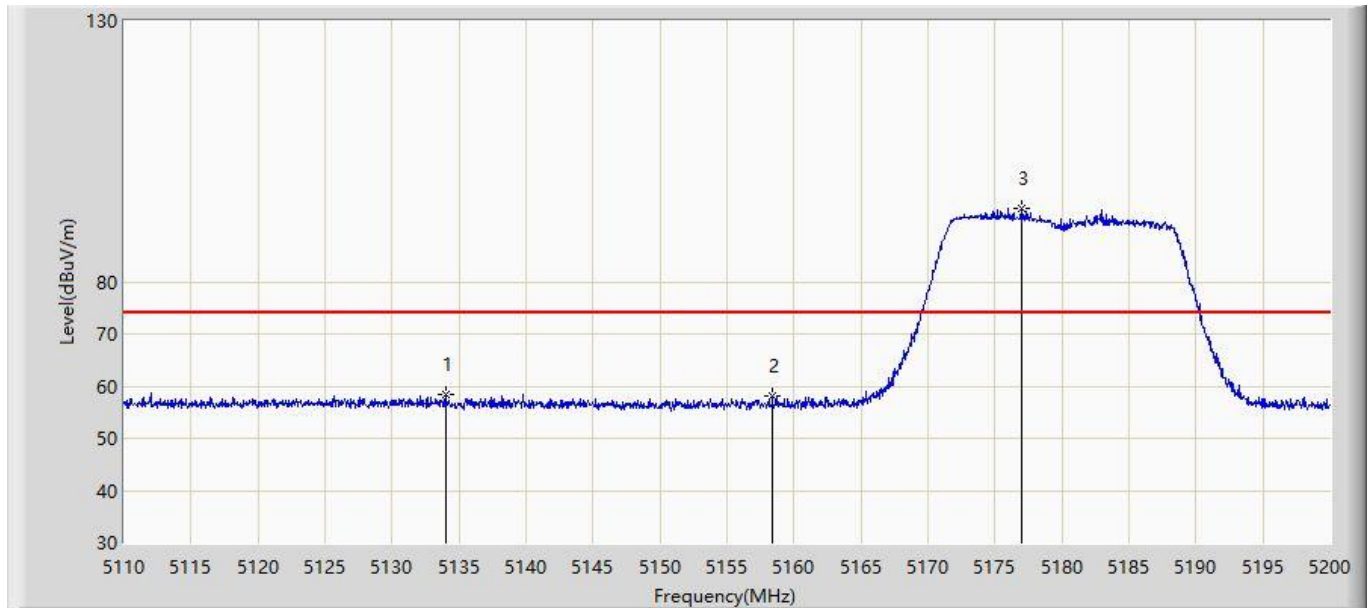


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.985	58.454	54.818	-15.546	74.000	3.636	PK
2			5158.375	58.247	54.596	-15.753	74.000	3.651	PK
3		*	5176.960	94.016	90.353	N/A	N/A	3.663	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1362 (CDD Mode)	

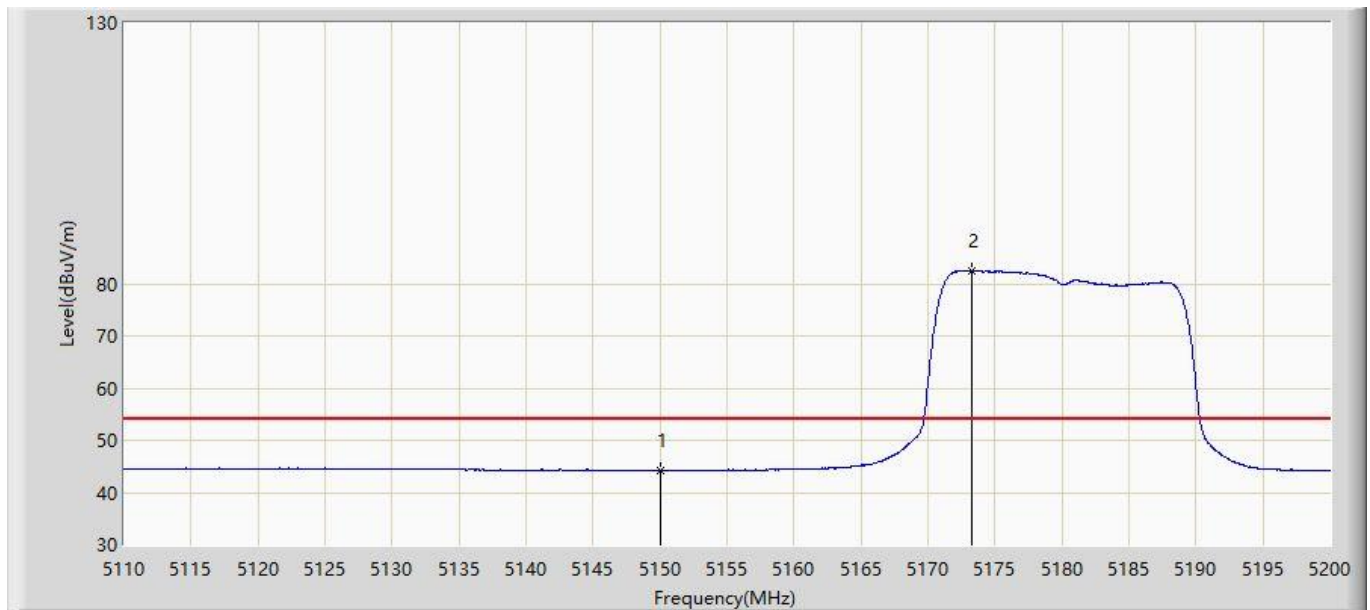


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.075	40.429	-9.925	54.000	3.646	AV
2		*	5173.225	82.456	78.796	N/A	N/A	3.660	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1362 (CDD Mode)	

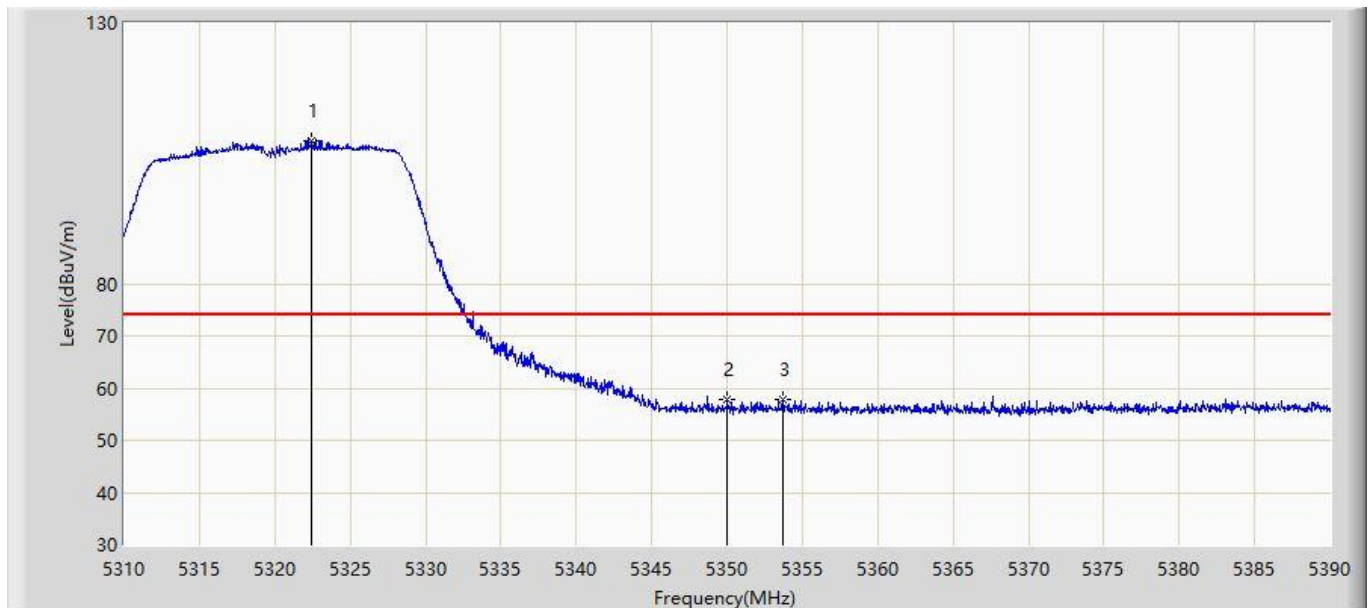


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.480	107.517	103.760	N/A	N/A	3.757	PK
2			5350.000	57.716	53.942	-16.284	74.000	3.774	PK
3			5353.720	57.818	54.042	-16.182	74.000	3.776	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1362 (CDD Mode)	

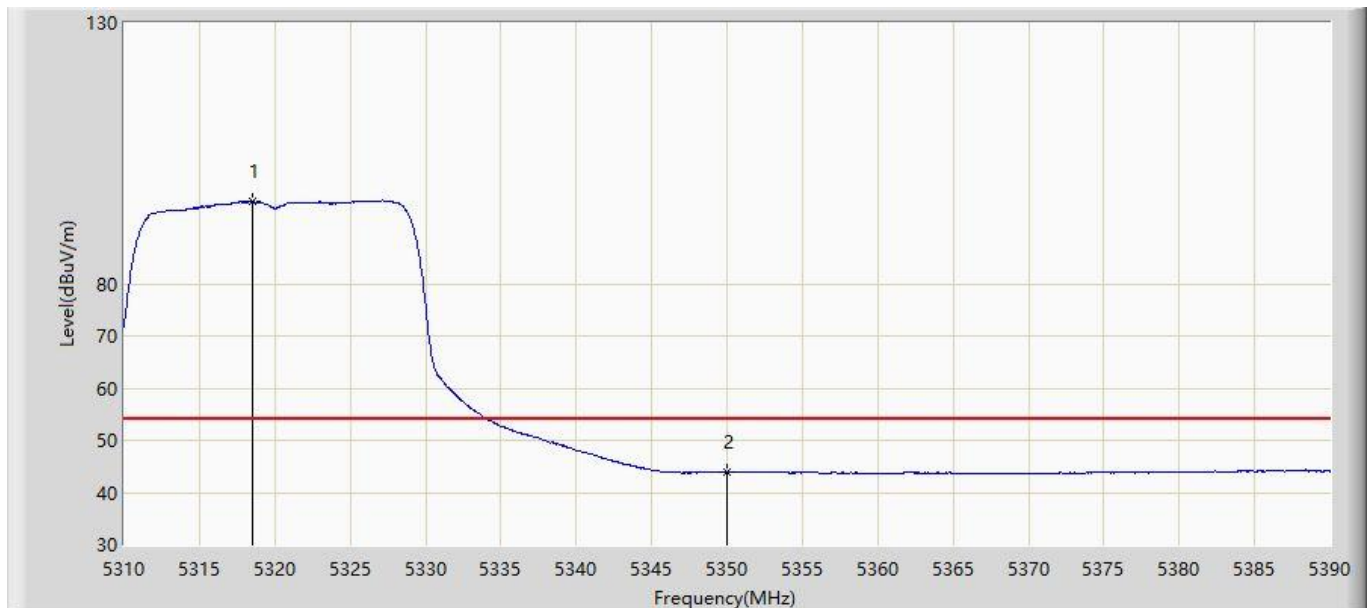


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.560	95.710	91.956	N/A	N/A	3.755	AV
2			5350.000	43.898	40.124	-10.102	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1362 (CDD Mode)	

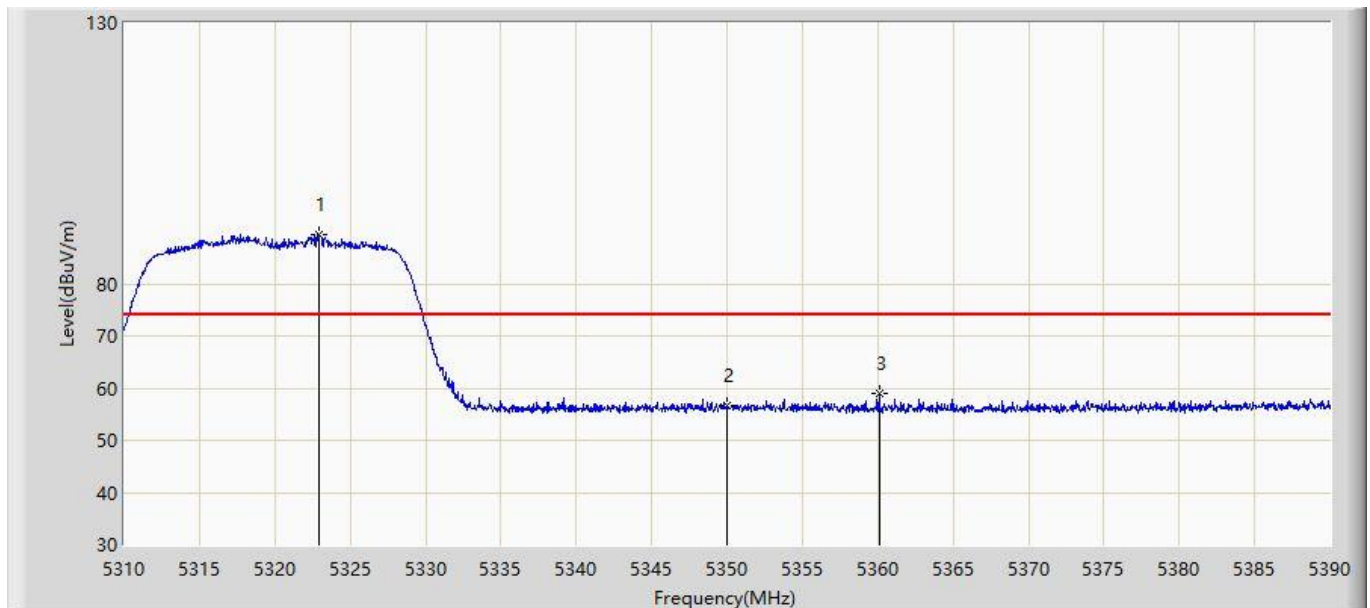


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.960	89.381	85.624	N/A	N/A	3.758	PK
2			5350.000	56.625	52.851	-17.375	74.000	3.774	PK
3			5360.080	59.023	55.243	-14.977	74.000	3.781	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1362 (CDD Mode)	

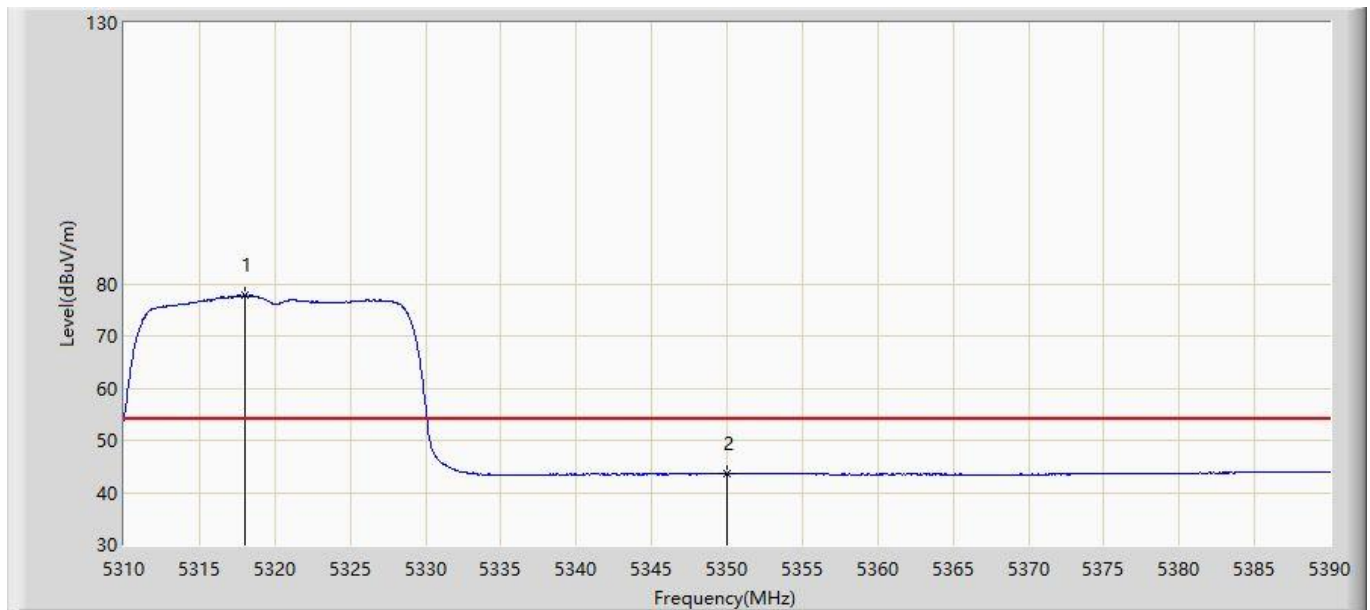


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.040	77.727	73.973	N/A	N/A	3.754	AV
2			5350.000	43.531	39.757	-10.469	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1362 (CDD Mode)	

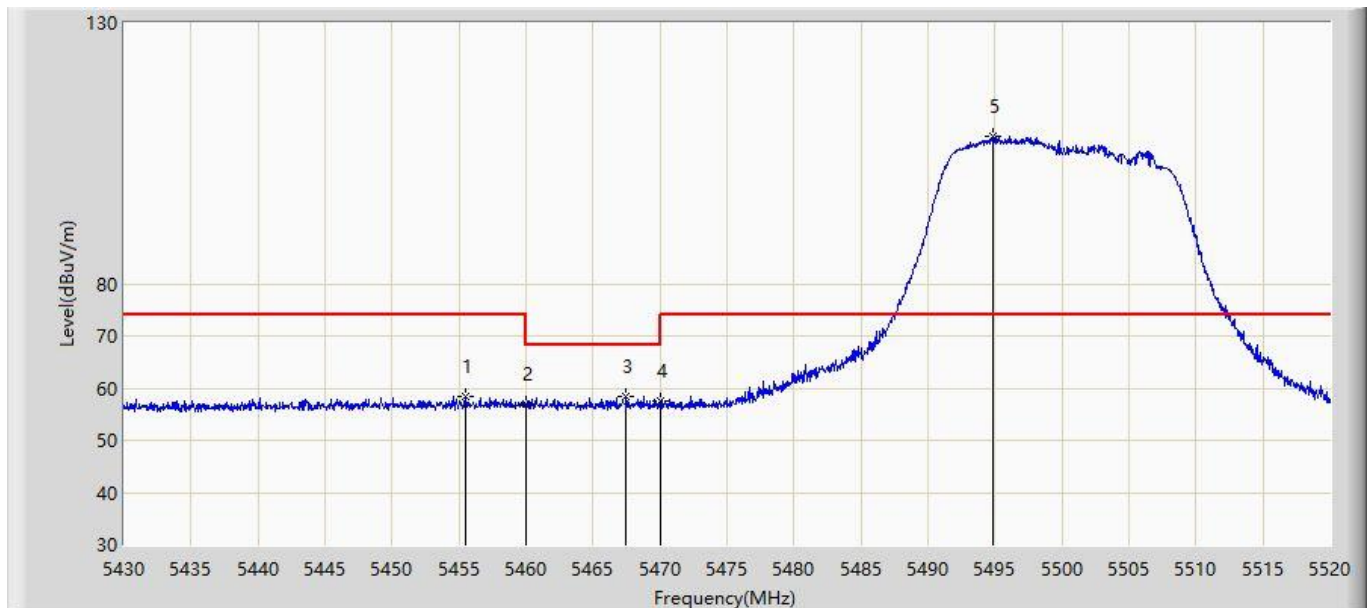


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.515	58.537	54.696	-15.463	74.000	3.841	PK
2			5460.000	56.837	52.993	-17.163	74.000	3.844	PK
3			5467.485	58.495	54.646	-9.705	68.200	3.849	PK
4			5470.000	57.532	53.681	-10.668	68.200	3.850	PK
5		*	5494.800	108.133	104.259	N/A	N/A	3.874	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1362 (CDD Mode)	

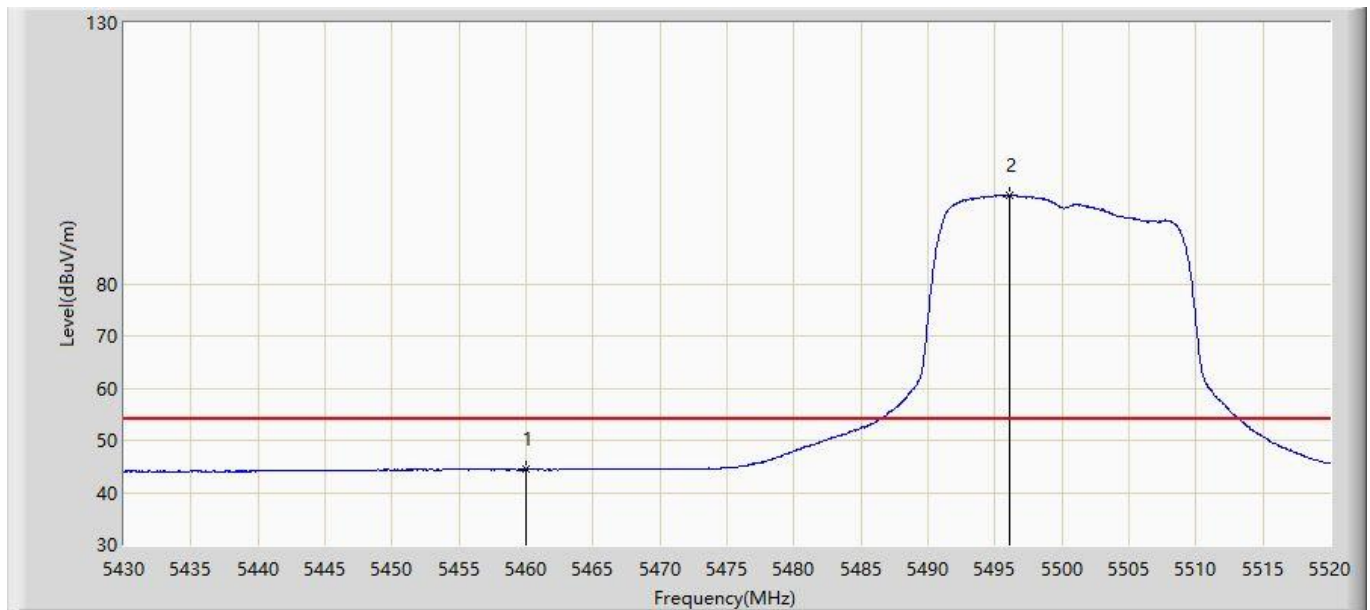


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.384	40.540	-9.616	54.000	3.844	AV
2		*	5496.105	96.934	93.058	N/A	N/A	3.876	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1362 (CDD Mode)	

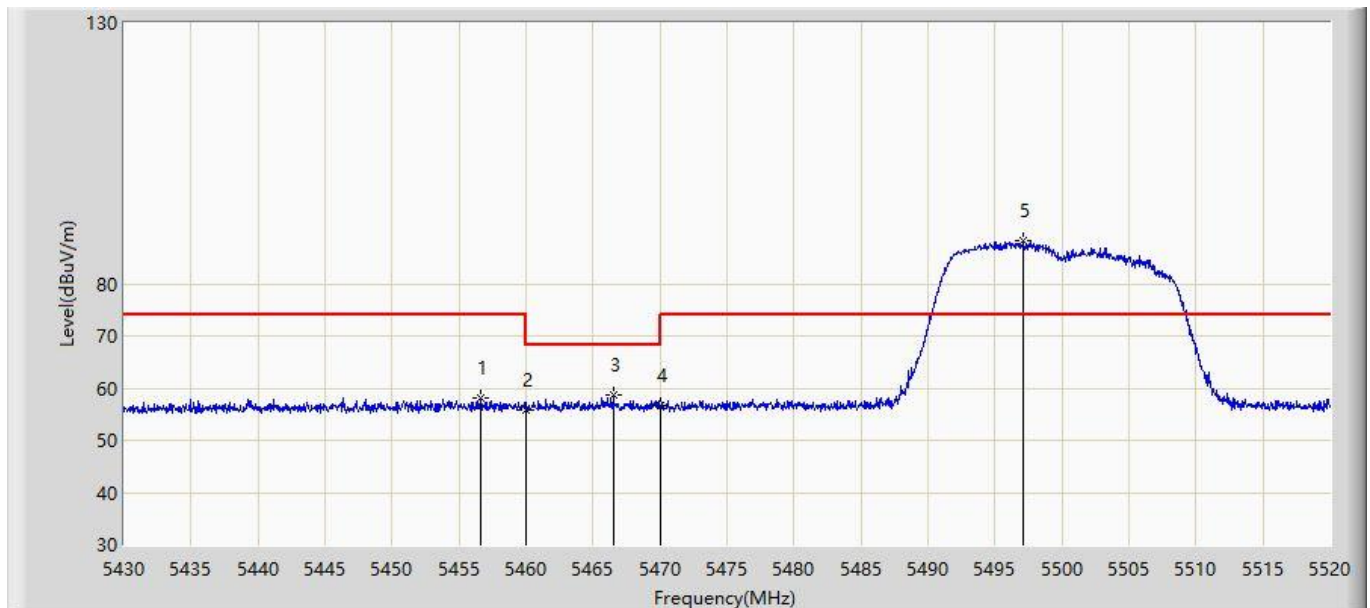


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.595	58.005	54.163	-15.995	74.000	3.842	PK
2			5460.000	55.871	52.027	-18.129	74.000	3.844	PK
3			5466.495	58.683	54.835	-9.517	68.200	3.848	PK
4			5470.000	56.579	52.728	-11.621	68.200	3.850	PK
5		*	5497.095	88.392	84.515	N/A	N/A	3.877	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1362 (CDD Mode)	

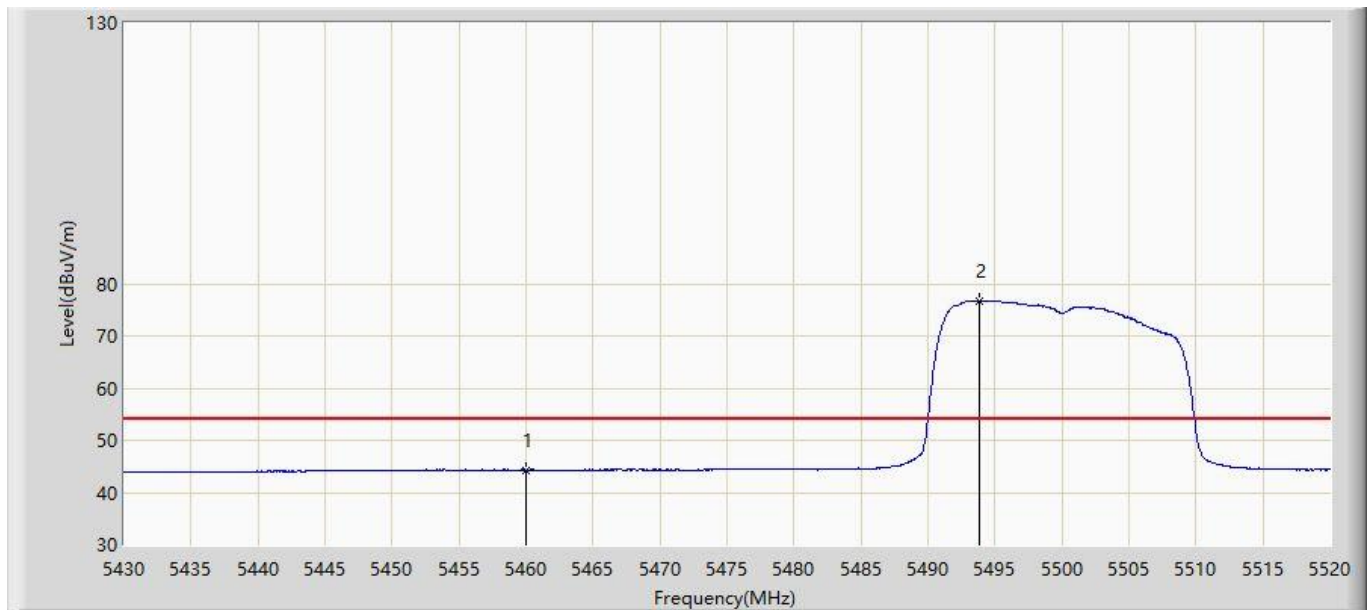


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.273	40.429	-9.727	54.000	3.844	AV
2		*	5493.810	76.750	72.878	N/A	N/A	3.872	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1362 (CDD Mode)	

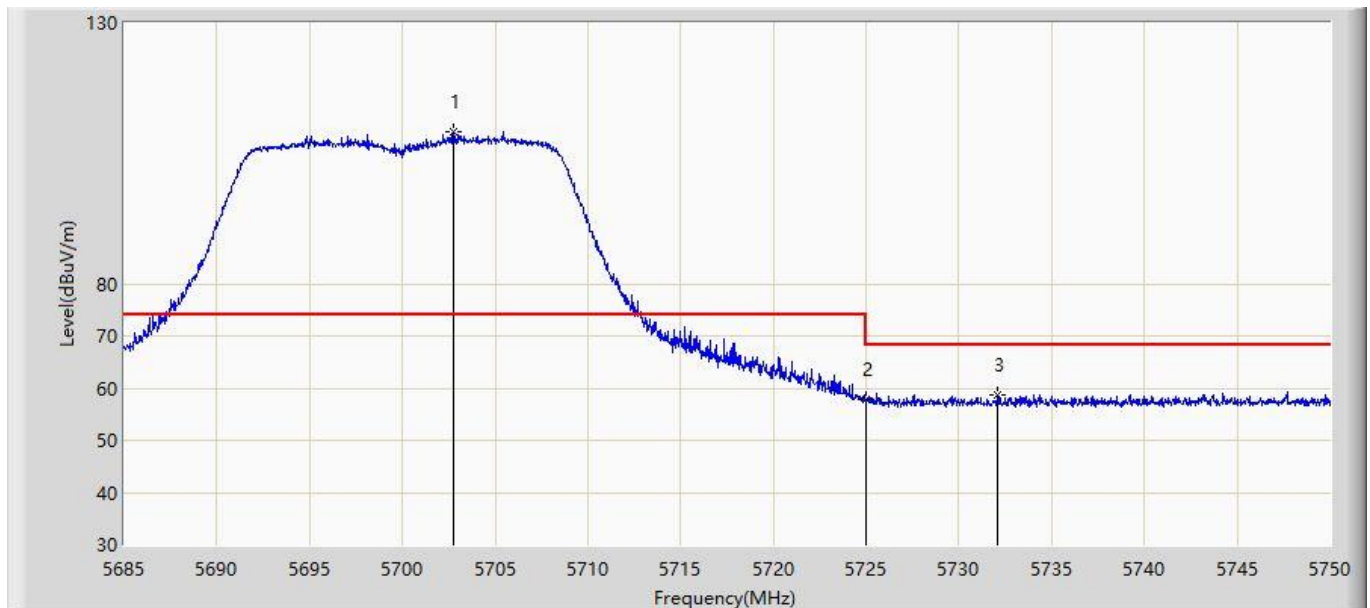


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.777	109.072	104.423	N/A	N/A	4.648	PK
2			5725.000	57.751	53.017	-10.449	68.200	4.734	PK
3			5732.092	58.817	54.056	-9.383	68.200	4.762	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1362 (CDD Mode)	

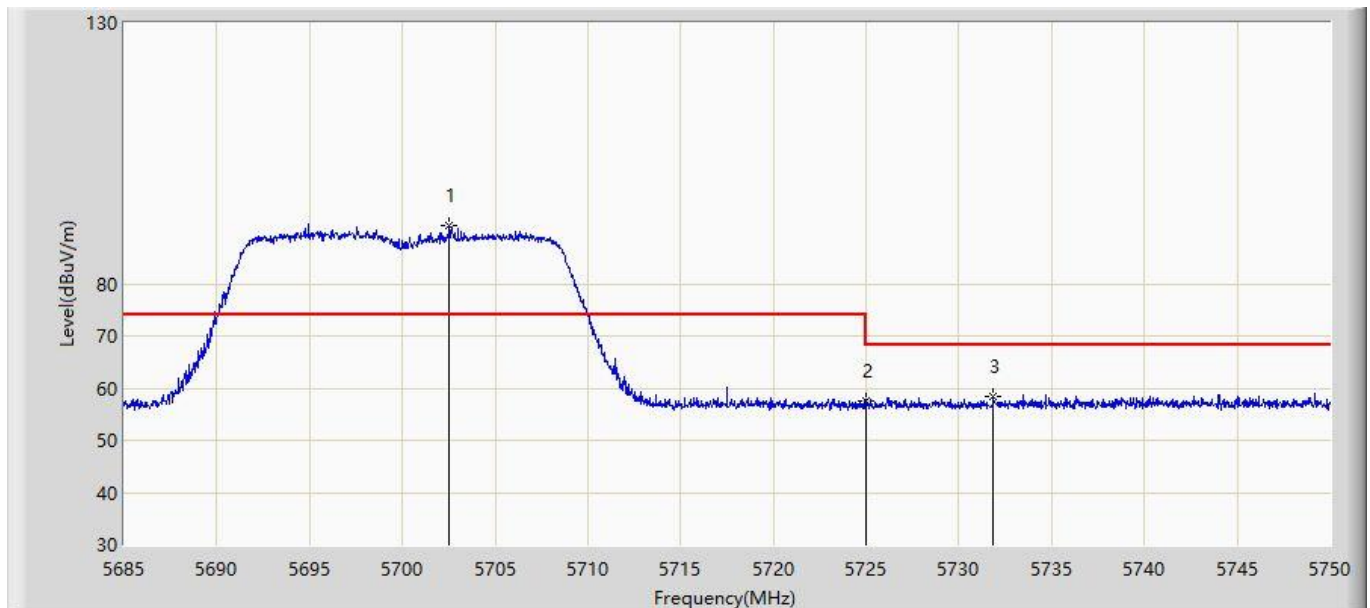


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.550	91.065	86.417	N/A	N/A	4.648	PK
2			5725.000	57.500	52.766	-10.700	68.200	4.734	PK
3			5731.865	58.489	53.729	-9.711	68.200	4.760	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1362 (CDD Mode)	

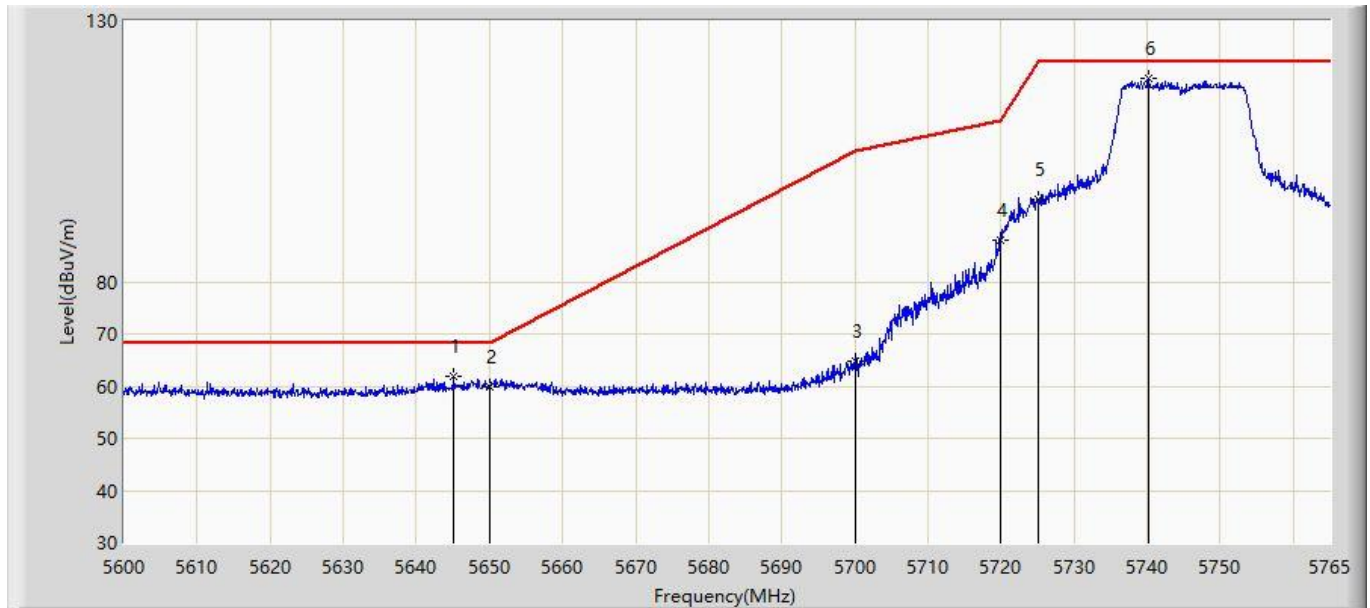


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5645.127	61.835	57.407	-6.365	68.200	4.427	PK
2			5650.000	59.934	55.488	-8.266	68.200	4.446	PK
3			5700.000	64.649	60.011	-40.551	105.200	4.638	PK
4			5720.000	87.972	83.257	-22.828	110.800	4.715	PK
5			5725.000	95.675	90.941	-26.525	122.200	4.734	PK
6		*	5740.085	118.988	114.196	N/A	N/A	4.791	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1362 (CDD Mode)	

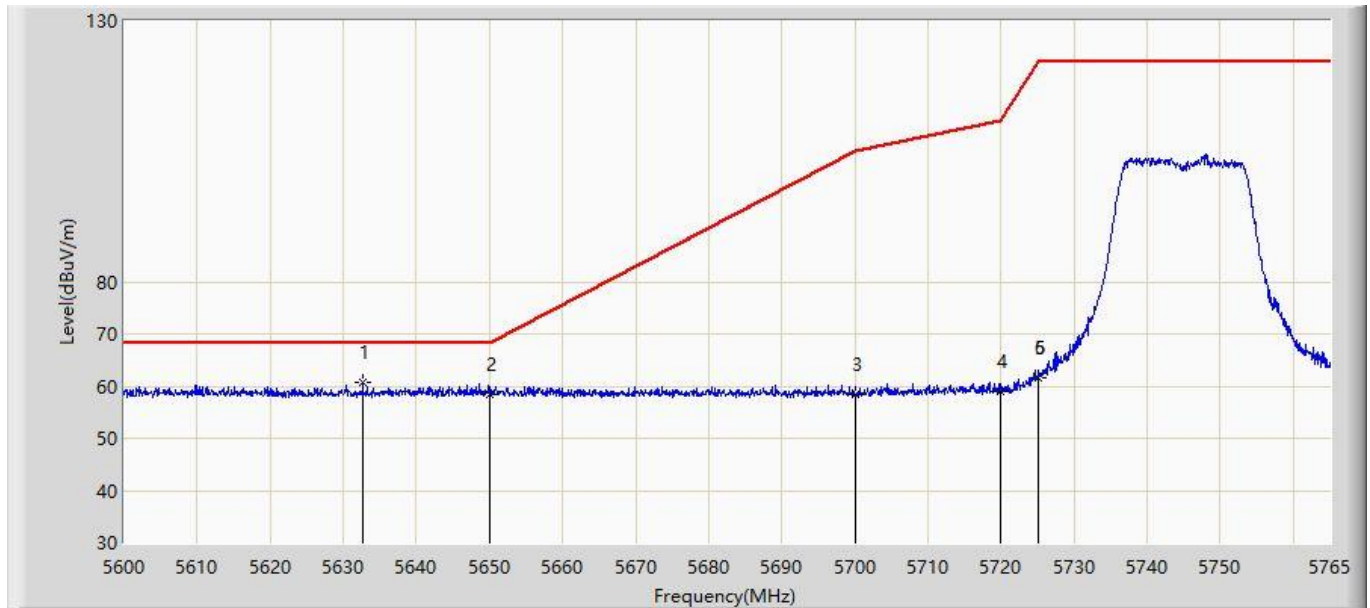


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5632.670	60.699	56.319	-7.501	68.200	4.380	PK
2			5650.000	58.376	53.930	-9.824	68.200	4.446	PK
3			5700.000	58.439	53.801	-46.761	105.200	4.638	PK
4			5720.000	59.100	54.385	-51.700	110.800	4.715	PK
5			5725.000	61.552	56.818	-60.648	122.200	4.734	PK
6			5725.000	61.552	56.818	N/A	N/A	4.734	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1362 (CDD Mode)	

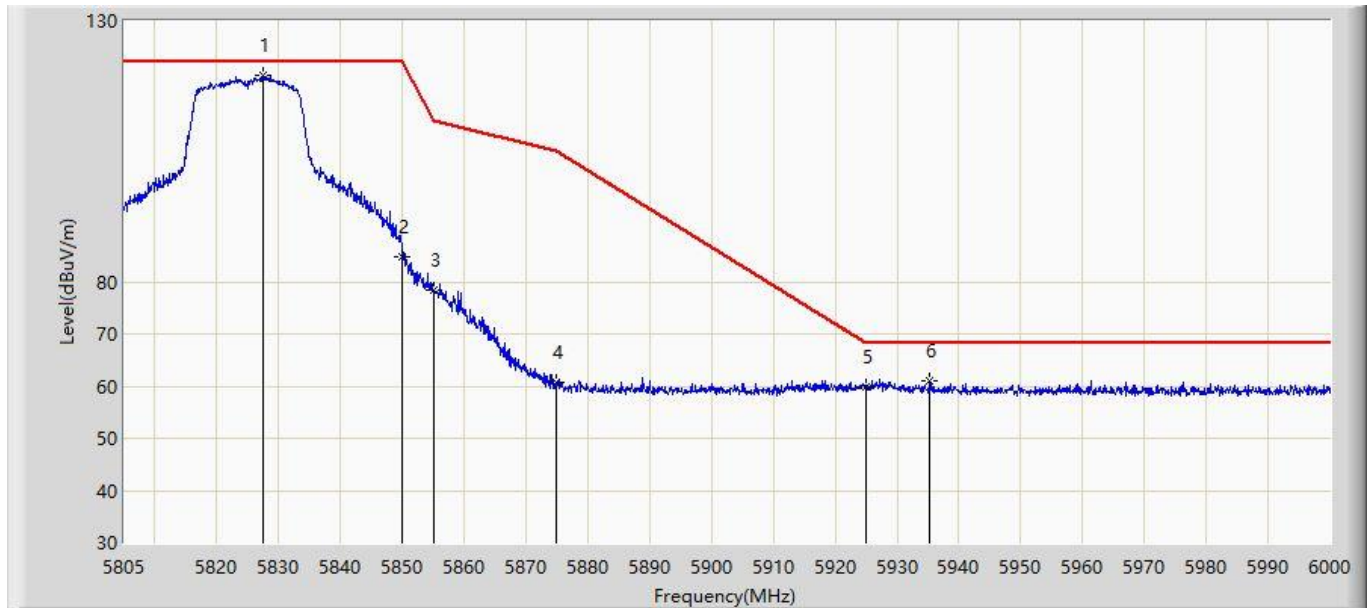


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5827.522	119.684	114.556	N/A	N/A	5.127	PK
2			5850.000	84.906	79.692	-37.294	122.200	5.214	PK
3			5855.000	78.341	73.108	-32.459	110.800	5.233	PK
4			5875.000	60.580	55.270	-44.620	105.200	5.310	PK
5			5925.000	59.784	54.282	-8.416	68.200	5.502	PK
6			5935.357	61.105	55.563	-7.095	68.200	5.542	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 16:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1362 (CDD Mode)	

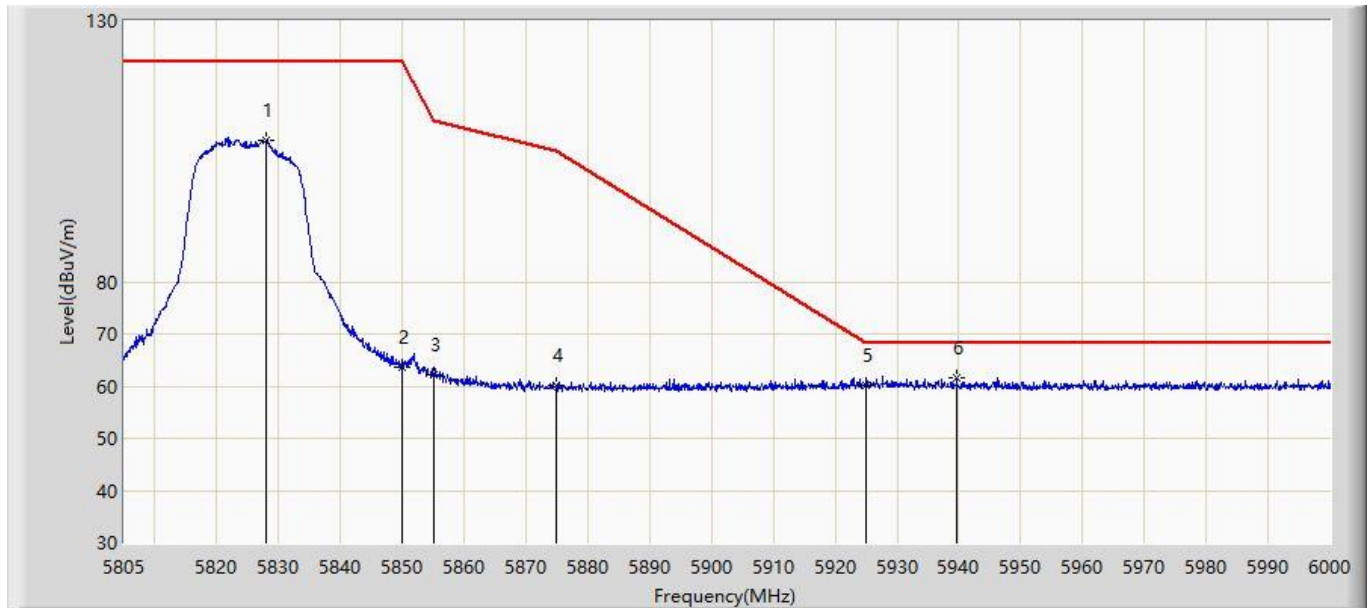


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5827.913	107.241	102.112	N/A	N/A	5.130	PK
2			5850.000	63.481	58.267	-58.719	122.200	5.214	PK
3			5855.000	62.189	56.956	-48.611	110.800	5.233	PK
4			5875.000	60.199	54.889	-45.001	105.200	5.310	PK
5			5925.000	60.068	54.566	-8.132	68.200	5.502	PK
6		*	5939.647	61.564	56.005	-6.636	68.200	5.559	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1362 (CDD Mode)	

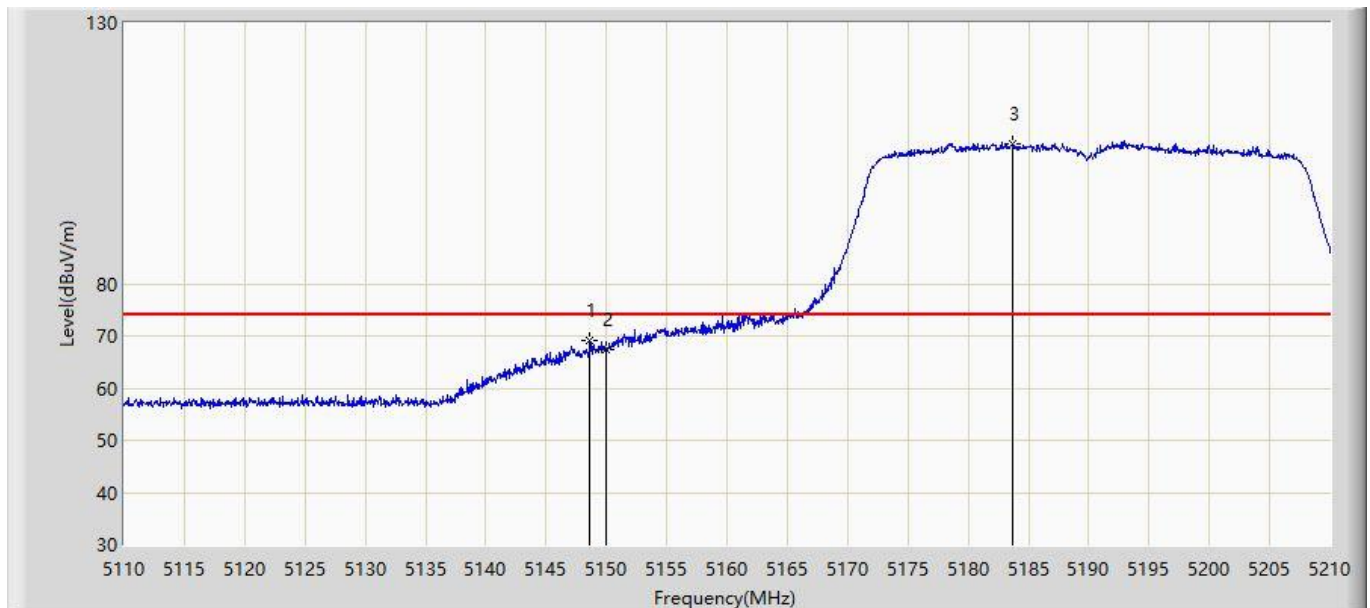


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.650	69.004	65.359	-4.996	74.000	3.645	PK
2			5150.000	67.521	63.875	-6.479	74.000	3.646	PK
3		*	5183.700	106.893	103.226	N/A	N/A	3.668	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/19 - 17:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1362 (CDD Mode)	

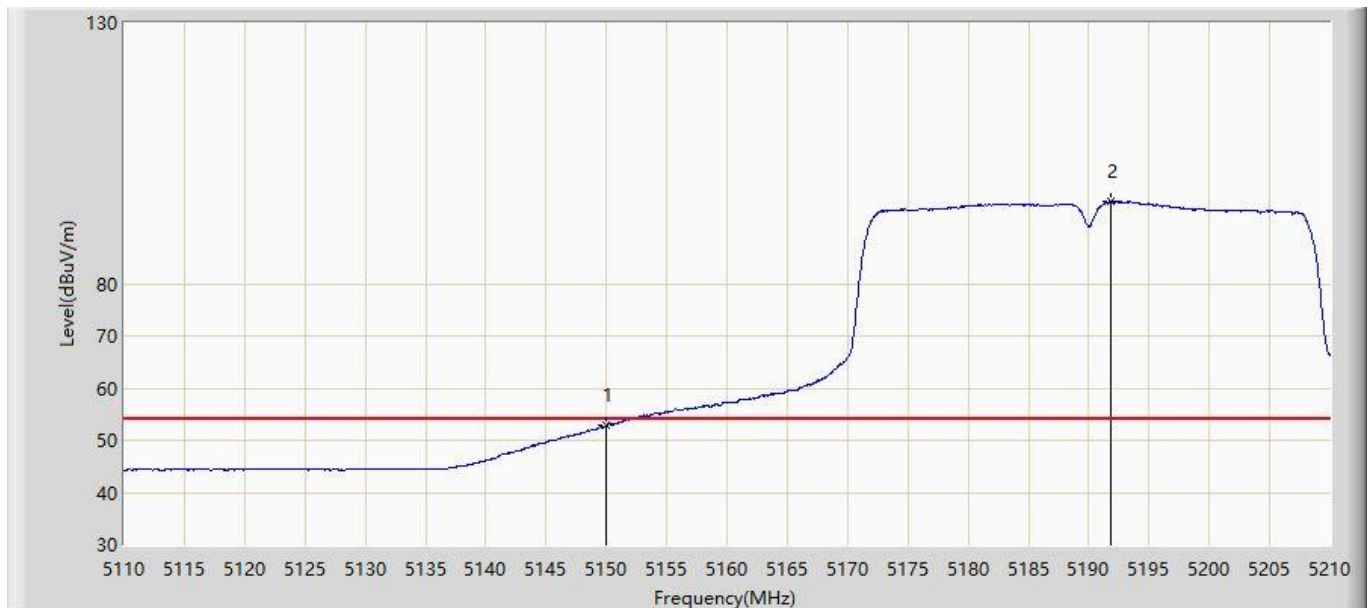

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.867	49.221	-1.133	54.000	3.646	AV
2		*	5191.850	95.756	92.083	N/A	N/A	3.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).