

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | ACCESS POINT                                                                                                                                                                      | Temperature       | 26°C       |
| Test Engineer | Kevin Ker                                                                                                                                                                         | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2017/09/02 |
| Test Mode:    | 802.11n-HT40 - Ant 0 + 1<br>(Beam-Forming Mode)                                                                                                                                   | Test Channel:     | 03         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 7536.5          | 31.3                 | 12.8        | 44.1                   | 74.0           | -29.9       | Peak     | Horizontal   |
|      | 8259.0          | 31.2                 | 11.9        | 43.1                   | 74.0           | -30.9       | Peak     | Horizontal   |
| *    | 9857.0          | 28.9                 | 16.2        | 45.1                   | 82.4           | -37.3       | Peak     | Horizontal   |
| *    | 12891.5         | 27.6                 | 19.4        | 47.0                   | 82.4           | -35.4       | Peak     | Horizontal   |
|      | 7443.0          | 30.0                 | 12.7        | 42.7                   | 74.0           | -31.3       | Peak     | Vertical     |
|      | 8318.5          | 30.7                 | 11.9        | 42.6                   | 74.0           | -31.4       | Peak     | Vertical     |
| *    | 10018.5         | 29.8                 | 15.4        | 45.2                   | 82.4           | -37.2       | Peak     | Vertical     |
| *    | 12891.5         | 27.6                 | 19.4        | 47.0                   | 82.4           | -35.4       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (112.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | ACCESS POINT                                                                                                                                                                      | Temperature       | 26°C       |
| Test Engineer | Kevin Ker                                                                                                                                                                         | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2017/09/02 |
| Test Mode:    | 802.11n-HT40 - Ant 0 + 1<br>(Beam-Forming Mode)                                                                                                                                   | Test Channel:     | 06         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 7528.0          | 31.1                 | 12.8        | 43.9                   | 74.0           | -30.1       | Peak     | Horizontal   |
|      | 8310.0          | 31.7                 | 11.9        | 43.6                   | 74.0           | -30.4       | Peak     | Horizontal   |
| *    | 9865.5          | 29.6                 | 16.0        | 45.6                   | 83.5           | -37.9       | Peak     | Horizontal   |
| *    | 13078.5         | 27.6                 | 20.0        | 47.6                   | 83.5           | -35.9       | Peak     | Horizontal   |
|      | 7536.5          | 31.3                 | 12.8        | 44.1                   | 74.0           | -29.9       | Peak     | Vertical     |
|      | 8284.5          | 32.4                 | 11.9        | 44.3                   | 74.0           | -29.7       | Peak     | Vertical     |
| *    | 10001.5         | 31.0                 | 15.4        | 46.4                   | 83.5           | -37.1       | Peak     | Vertical     |
| *    | 13078.5         | 27.6                 | 20.0        | 47.6                   | 83.5           | -35.9       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (113.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | ACCESS POINT                                                                                                                                                                      | Temperature       | 26°C       |
| Test Engineer | Kevin Ker                                                                                                                                                                         | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2017/09/02 |
| Test Mode:    | 802.11n-HT40 - Ant 0 + 1<br>(Beam-Forming Mode)                                                                                                                                   | Test Channel:     | 09         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 7477.0          | 30.6                 | 12.8        | 43.4                   | 74.0           | -30.6       | Peak     | Horizontal   |
|      | 8208.0          | 32.1                 | 11.9        | 44.0                   | 74.0           | -30.0       | Peak     | Horizontal   |
| *    | 9976.0          | 30.9                 | 15.3        | 46.2                   | 83.2           | -37.0       | Peak     | Horizontal   |
| *    | 12840.5         | 29.3                 | 19.2        | 48.5                   | 83.2           | -34.7       | Peak     | Horizontal   |
|      | 7528.0          | 31.1                 | 12.8        | 43.9                   | 74.0           | -30.1       | Peak     | Vertical     |
|      | 8369.5          | 31.6                 | 12.1        | 43.7                   | 74.0           | -30.3       | Peak     | Vertical     |
| *    | 10061.0         | 31.2                 | 15.6        | 46.8                   | 83.2           | -36.4       | Peak     | Vertical     |
| *    | 12840.5         | 29.3                 | 19.2        | 48.5                   | 83.2           | -34.7       | Peak     | Vertical     |


Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (113.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Worst Case of Radiated Emission below 1GHz:

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2017/09/07 - 22:33 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Kevin Ker      |
| Probe: VULB 9168_20-2000MHz                                             | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                       | Power: AC 120V/60Hz      |
| <b>Note: There is the worst case within frequency range 30MHz~1GHz.</b> |                          |

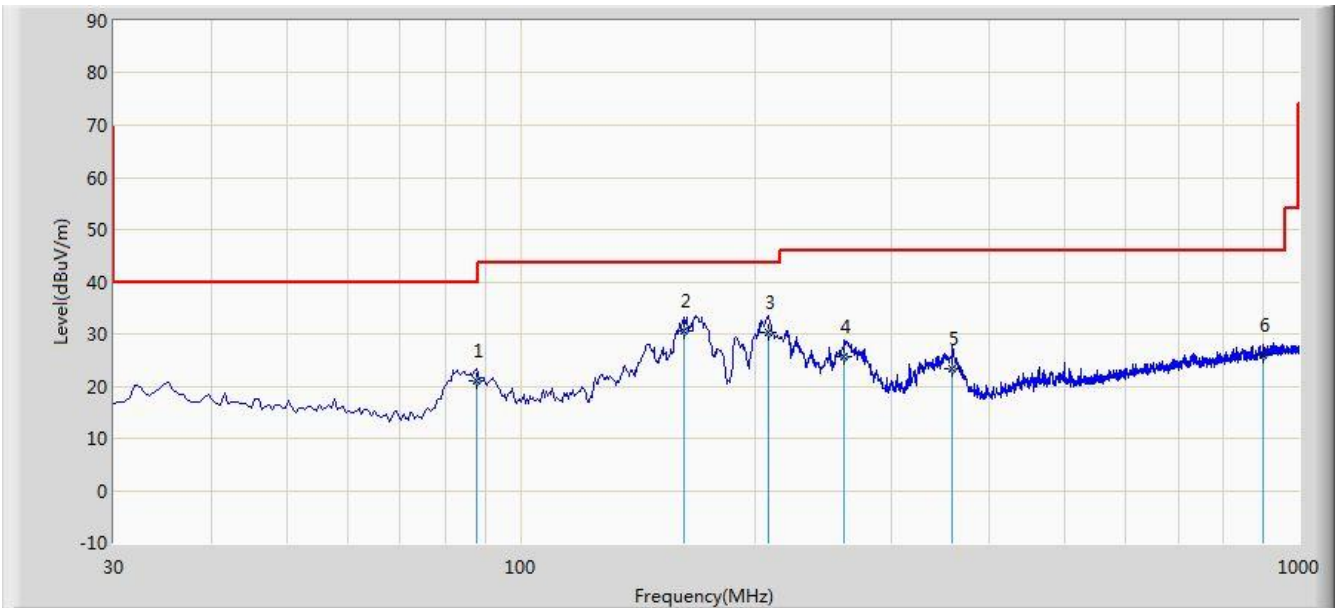


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 87.710          | 21.015                 | 10.280               | -18.985     | 40.000         | 10.736      | QP   |
| 2  |      | *    | 161.920         | 30.687                 | 20.650               | -12.813     | 43.500         | 10.037      | QP   |
| 3  |      |      | 208.480         | 30.434                 | 17.890               | -13.066     | 43.500         | 12.544      | QP   |
| 4  |      |      | 260.330         | 25.716                 | 11.650               | -20.284     | 46.000         | 14.066      | QP   |
| 5  |      |      | 358.830         | 23.335                 | 7.150                | -22.665     | 46.000         | 16.185      | QP   |
| 6  |      |      | 901.540         | 25.950                 | 1.510                | -20.050     | 46.000         | 24.440      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2017/09/07 - 22:35 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Kevin Ker      |
| Probe: VULB 9168_20-2000MHz                                             | Polarity: Vertical       |
| EUT: ACCESS POINT                                                       | Power: AC 120V/60Hz      |
| <b>Note: There is the worst case within frequency range 30MHz~1GHz.</b> |                          |

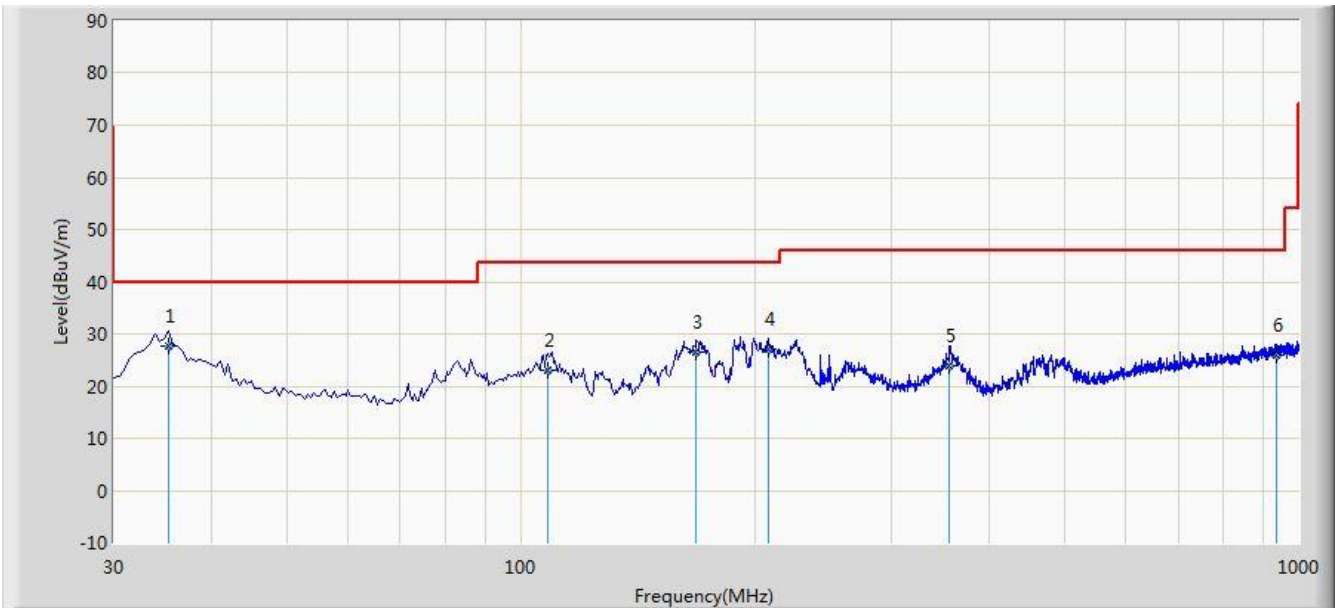

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 35.335          | 27.597                 | 14.590               | -12.403     | 40.000         | 13.007      | QP   |
| 2  |      |      | 108.570         | 23.178                 | 10.080               | -20.322     | 43.500         | 13.098      | QP   |
| 3  |      |      | 168.225         | 26.453                 | 16.150               | -17.047     | 43.500         | 10.303      | QP   |
| 4  |      |      | 208.480         | 26.984                 | 14.440               | -16.516     | 43.500         | 12.544      | QP   |
| 5  |      |      | 355.920         | 23.990                 | 7.850                | -22.010     | 46.000         | 16.140      | QP   |
| 6  |      |      | 937.920         | 25.847                 | 1.150                | -20.153     | 46.000         | 24.696      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## 5. 混附發射之 RF 傳導發射測試結果


|               |              |                   |            |
|---------------|--------------|-------------------|------------|
| Product       | ACCESS POINT | Temperature       | 27°C       |
| Test Engineer | Kevin Ker    | Relative Humidity | 65%        |
| Test Site     | SR2          | Test Date         | 2017/09/06 |

| Test Mode         | Data Rate<br>/ MCS | Channel No. | Frequency<br>(MHz) | Limit<br>(dBc) | Result |
|-------------------|--------------------|-------------|--------------------|----------------|--------|
| Ant 0 / Ant 0 + 1 |                    |             |                    |                |        |
| 802.11b           | 1Mbps              | 01          | 2412               | 30             | Pass   |
| 802.11b           | 1Mbps              | 06          | 2437               | 30             | Pass   |
| 802.11b           | 1Mbps              | 11          | 2462               | 30             | Pass   |
| 802.11g           | 6Mbps              | 01          | 2412               | 30             | Pass   |
| 802.11g           | 6Mbps              | 06          | 2437               | 30             | Pass   |
| 802.11g           | 6Mbps              | 11          | 2462               | 30             | Pass   |
| 802.11n-HT20      | MCS0               | 01          | 2412               | 30             | Pass   |
| 802.11n-HT20      | MCS0               | 06          | 2437               | 30             | Pass   |
| 802.11n-HT20      | MCS0               | 11          | 2462               | 30             | Pass   |
| 802.11n-HT40      | MCS0               | 03          | 2422               | 30             | Pass   |
| 802.11n-HT40      | MCS0               | 06          | 2437               | 30             | Pass   |
| 802.11n-HT40      | MCS0               | 09          | 2452               | 30             | Pass   |


## 802.11b Out-of-Band Emissions - Ant 0 / Ant 0 + 1

### Channel 01 (2412MHz)


#### 100kHz PSD reference Level

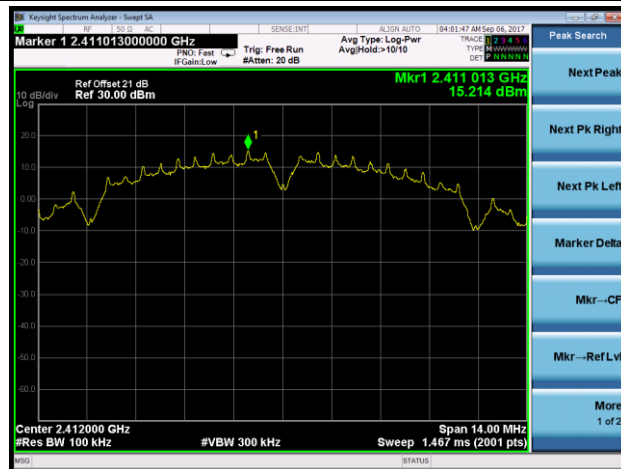

#### Low Band Edge

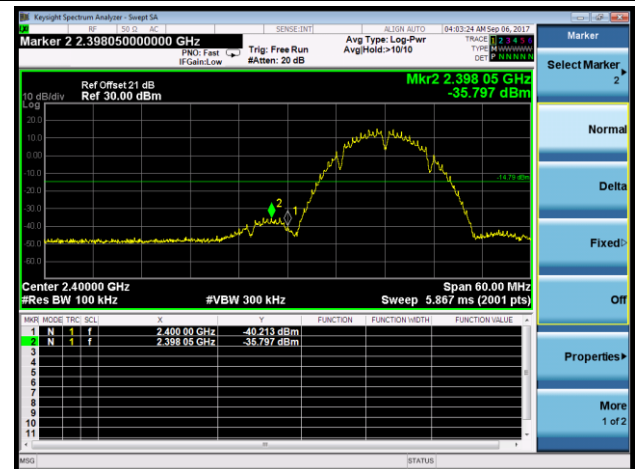

#### Spurious Emission

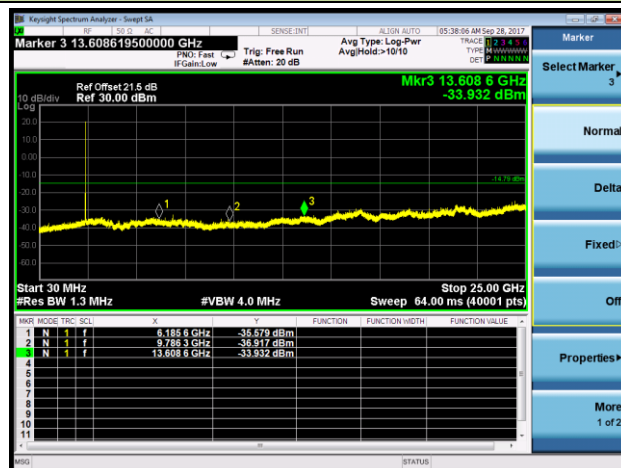


Note: The Value of the Display Line is -14.79dBm

### Channel 06 (2437MHz)

#### 100kHz PSD reference Level



#### Spurious Emission

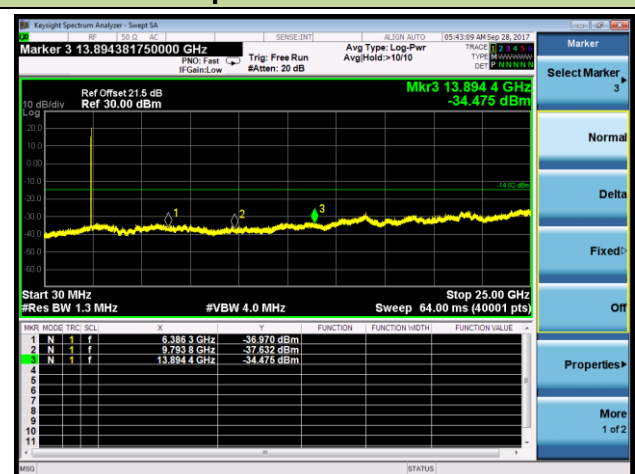


Note: The Value of the Display Line is -14.82dBm


## 802.11b Out-of-Band Emissions - Ant 0 / Ant 0 + 1

### Channel 11 (2462MHz)


#### 100kHz PSD reference Level

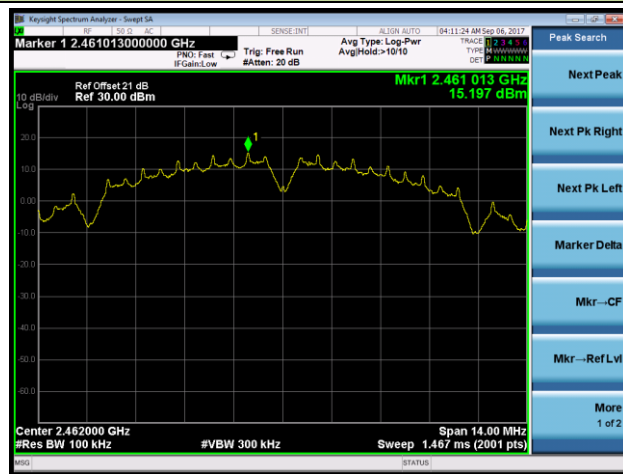

#### High Band Edge

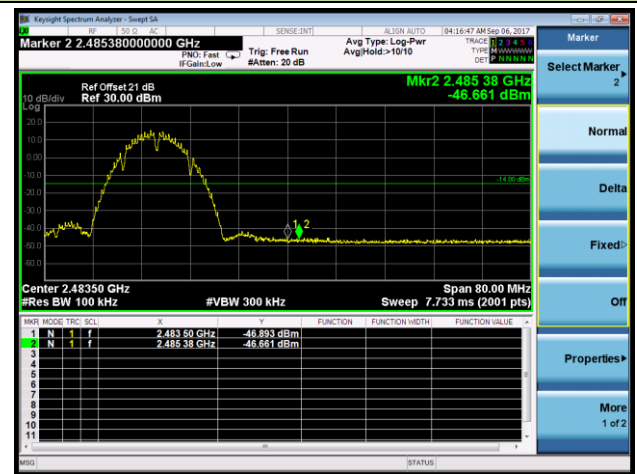

#### Spurious Emission

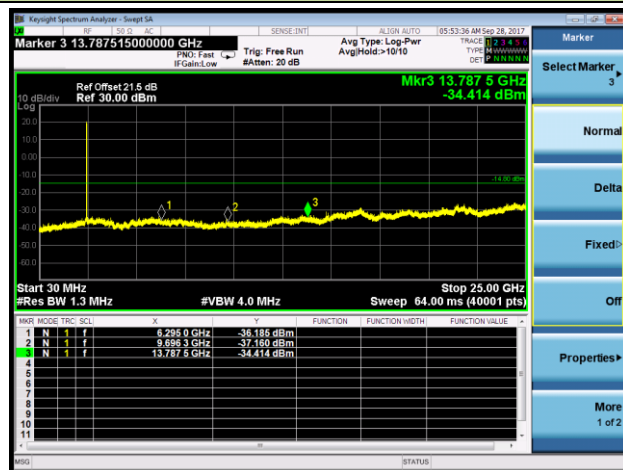

Note: The Value of the Display Line is -14.80dBm


## 802.11g Out-of-Band Emissions - Ant 0 / Ant 0 + 1

### Channel 01 (2412MHz)


#### 100kHz PSD reference Level



#### Low Band Edge

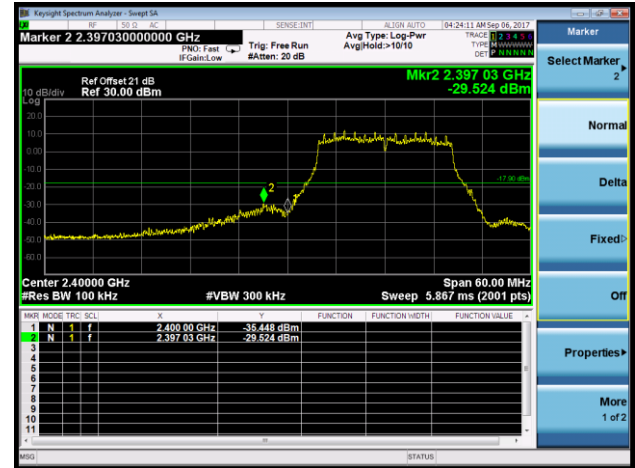

#### Spurious Emission

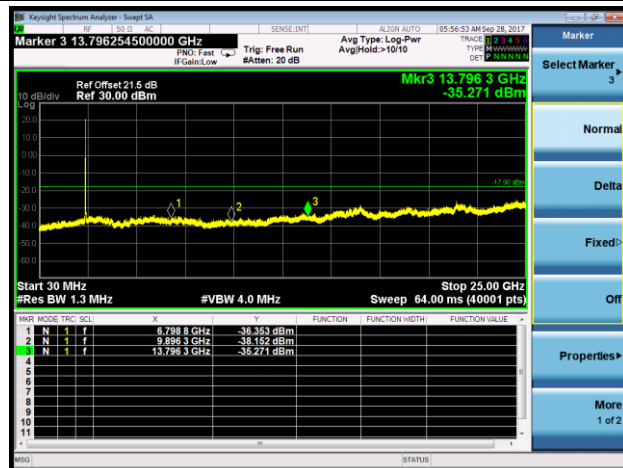


Note: The Value of the Display Line is -17.90dBm

### Channel 06 (2437MHz)

#### 100kHz PSD reference Level



#### Spurious Emission

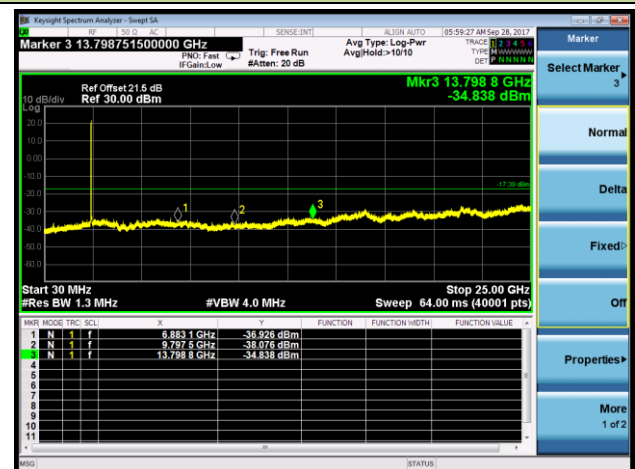


Note: The Value of the Display Line is -17.39dBm

## 802.11g Out-of-Band Emissions - Ant 0 / Ant 0 + 1

### Channel 11 (2462MHz)


#### 100kHz PSD reference Level

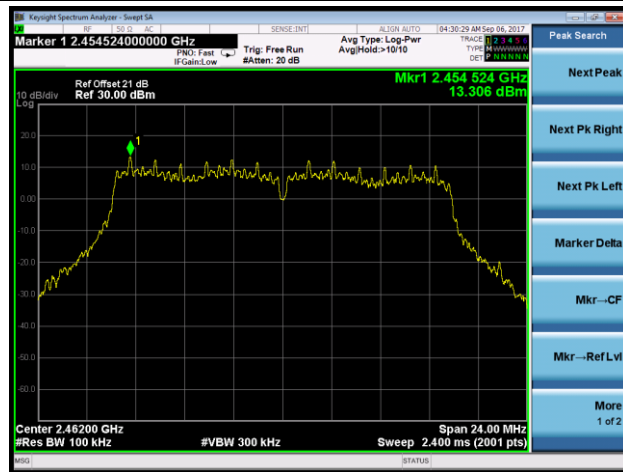

#### High Band Edge



#### Spurious Emission

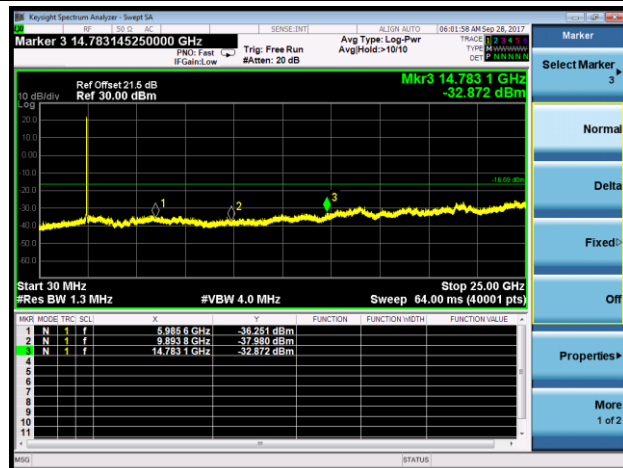

Note: The Value of the Display Line is -14.69dBm


## 802.11n-HT20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

### Channel 01 (2412MHz)


#### 100kHz PSD reference Level



#### Low Band Edge

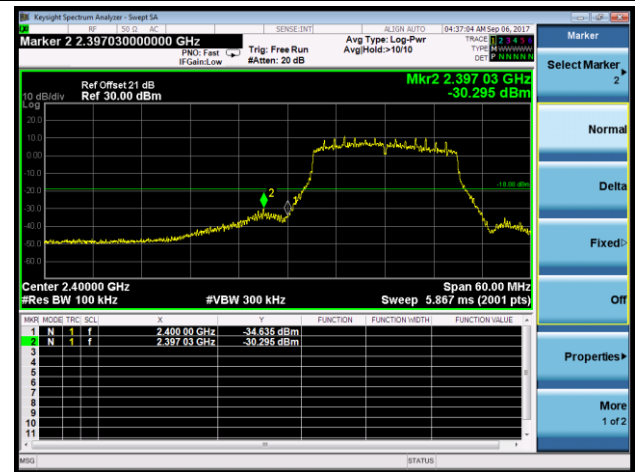


#### Spurious Emission

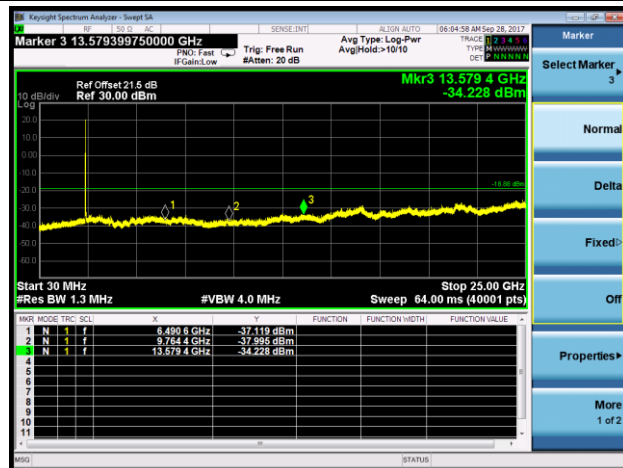


Note: The Value of the Display Line is -18.88dBm

### Channel 06 (2437MHz)

#### 100kHz PSD reference Level

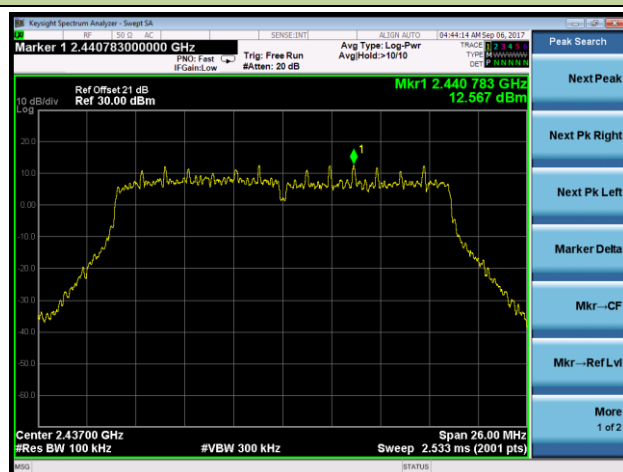

#### Spurious Emission

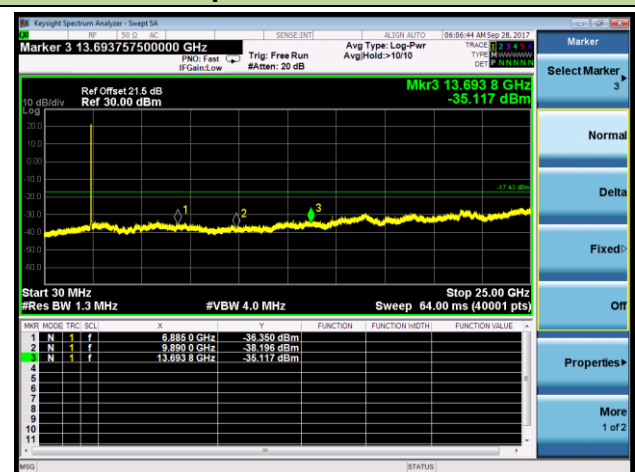


Note: The Value of the Display Line is -17.43dBm


## 802.11n-HT20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

### Channel 11 (2462MHz)


#### 100kHz PSD reference Level

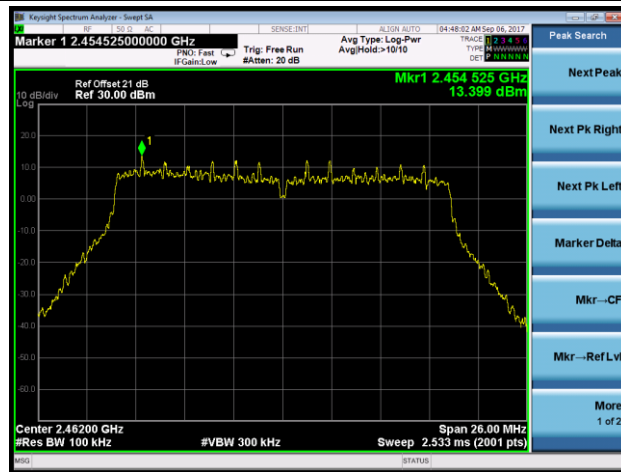

#### High Band Edge

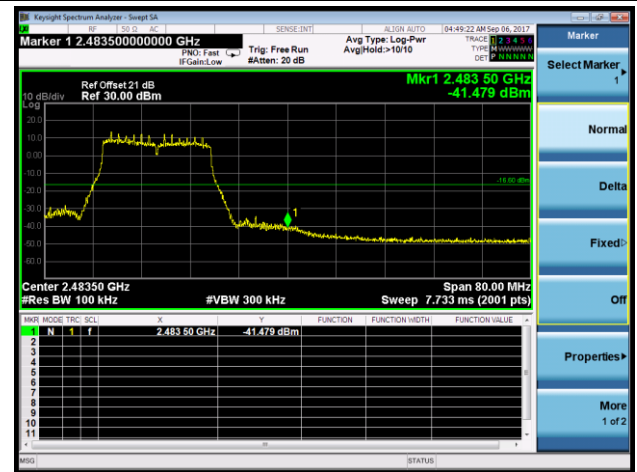

#### Spurious Emission

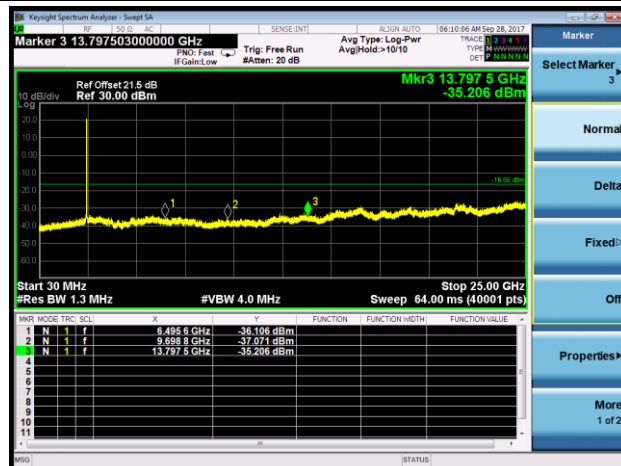

Note: The Value of the Display Line is -16.60dBm


## 802.11n-HT40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

### Channel 03 (2422MHz)


#### 100kHz PSD reference Level



#### Low Band Edge

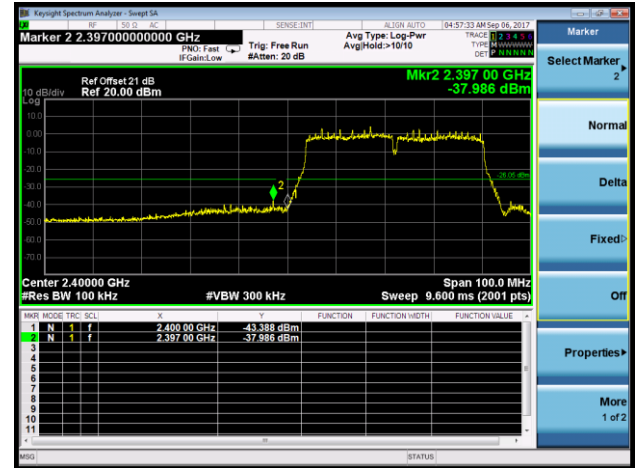


#### Spurious Emission

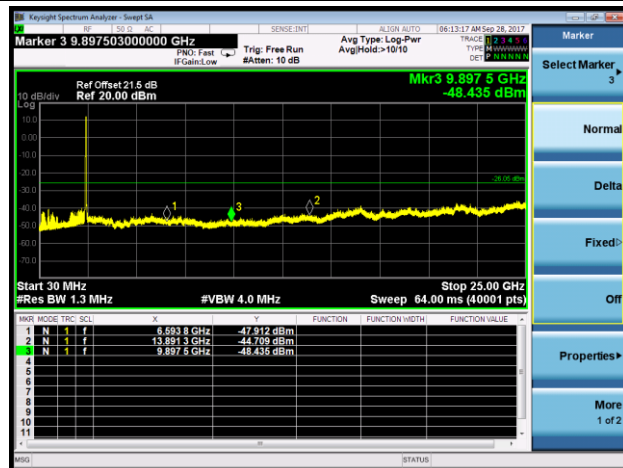


Note: The Value of the Display Line is -26.05dBm

### Channel 06 (2437MHz)

#### 100kHz PSD reference Level

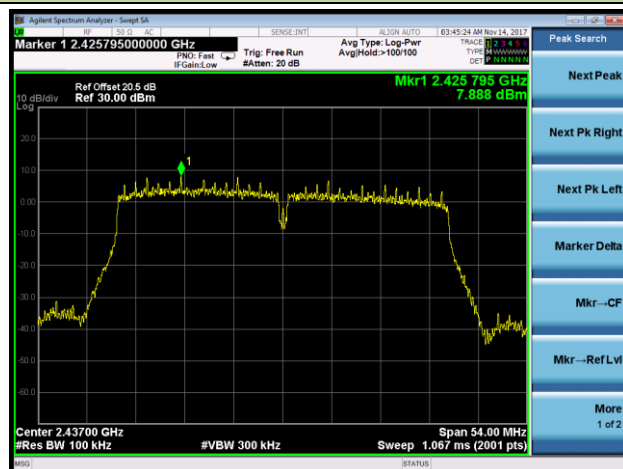

#### Spurious Emission

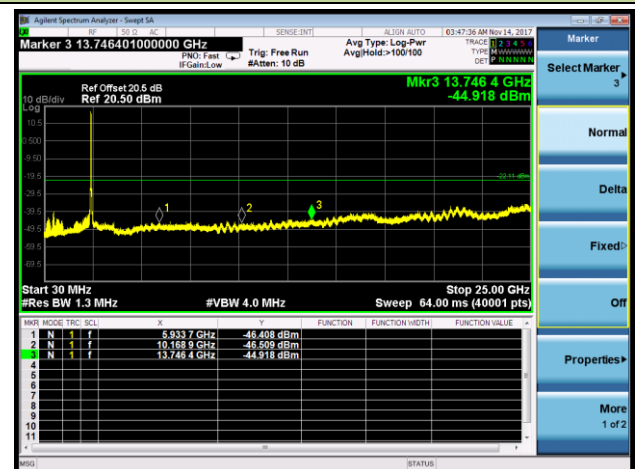


Note: The Value of the Display Line is -22.11dBm


## 802.11n-HT40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

### Channel 09 (2452MHz)


#### 100kHz PSD reference Level

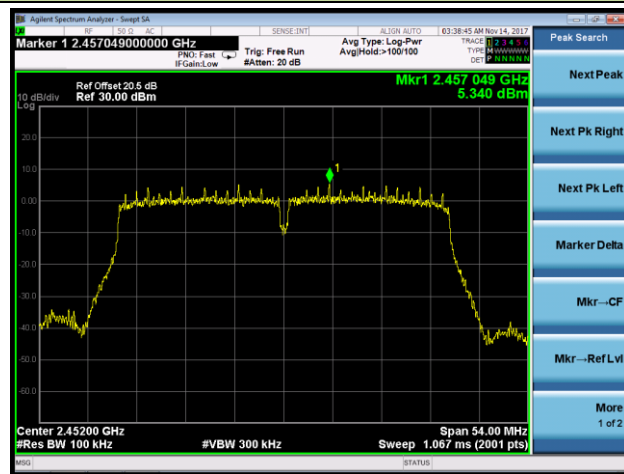

#### High Band Edge

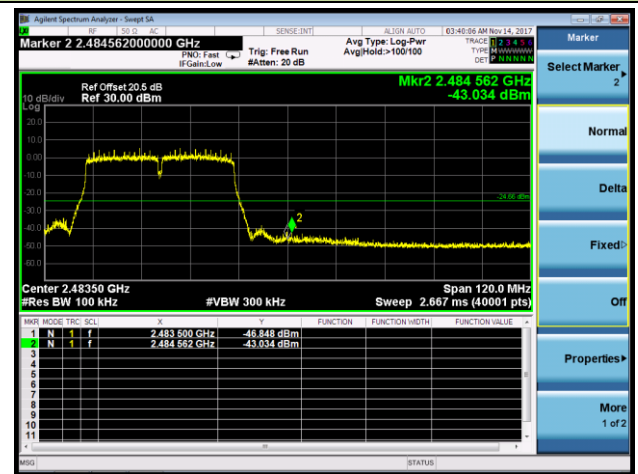


#### Spurious Emission

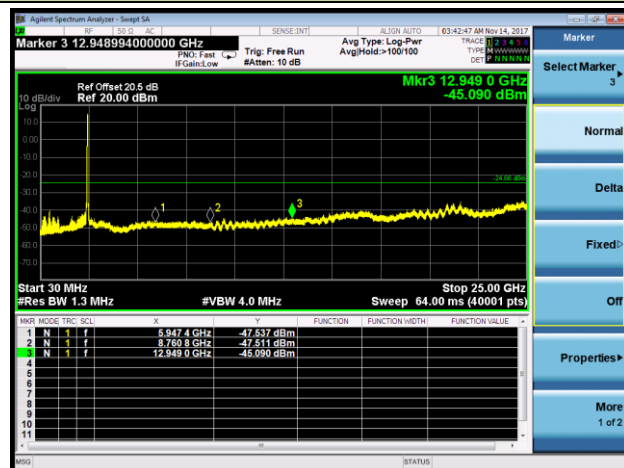

Note: The Value of the Display Line is -24.66dBm

## 6. 開放頻帶邊緣之不必要幅射要求測試結果

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:04 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

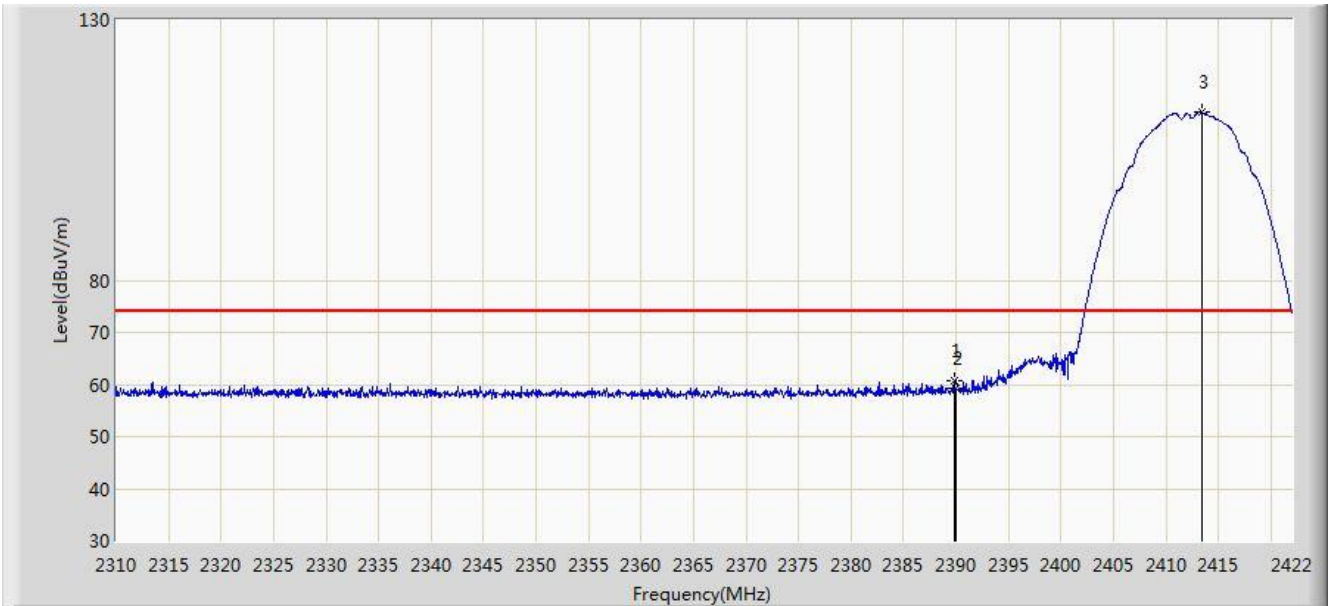


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.856        | 60.718                 | 28.163               | -13.282         | 74.000         | 32.555      | PK   |
| 2  |      |      | 2390.000        | 59.132                 | 26.578               | -14.868         | 74.000         | 32.554      | PK   |
| 3  |      | *    | 2413.432        | 112.182                | 79.658               | N/A             | N/A            | 32.524      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:09 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

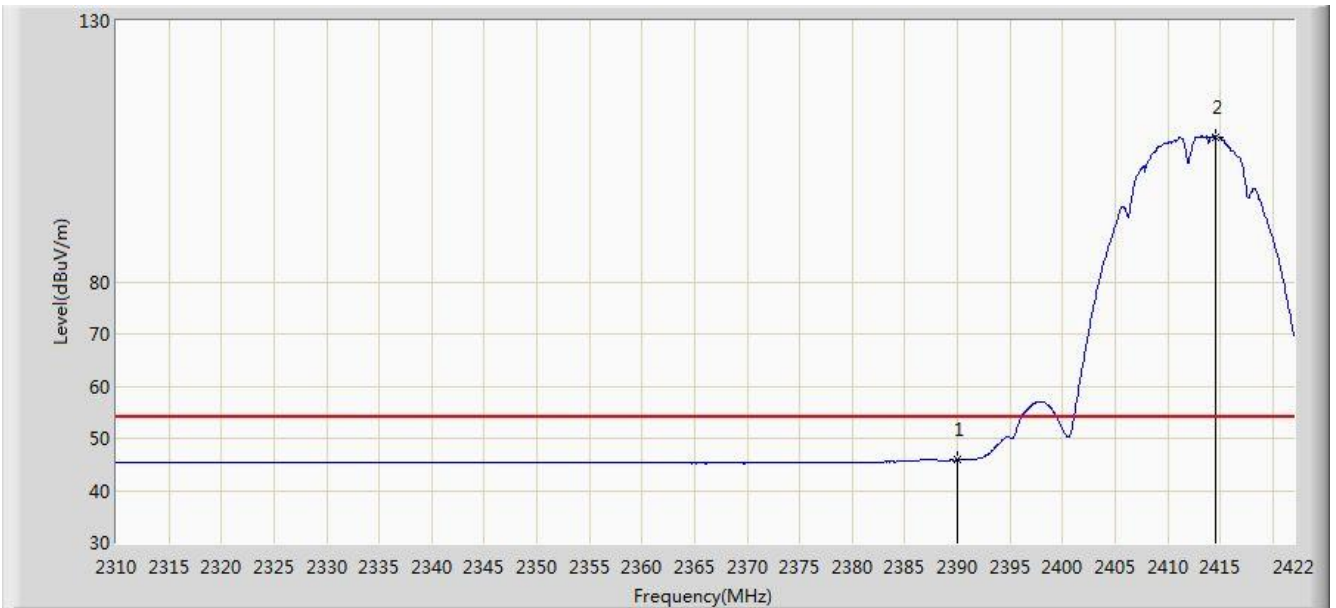


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 45.846                 | 13.292               | -8.154          | 54.000         | 32.554      | AV   |
| 2  |      | *    | 2414.608        | 107.819                | 75.297               | N/A             | N/A            | 32.522      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:10 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Vertical       |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

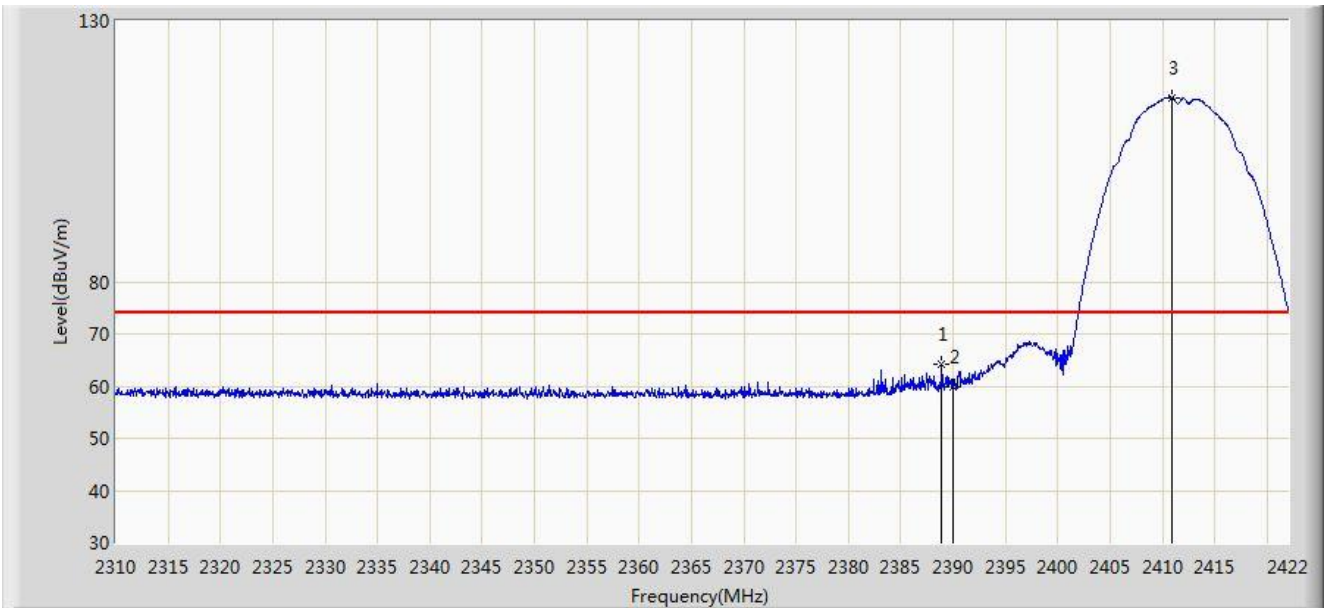


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2388.904        | 64.314                 | 31.758               | -9.686          | 74.000         | 32.556      | PK   |
| 2  |      |      | 2390.000        | 59.880                 | 27.326               | -14.120         | 74.000         | 32.554      | PK   |
| 3  |      | *    | 2410.968        | 115.264                | 82.737               | N/A             | N/A            | 32.527      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:13 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Vertical       |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

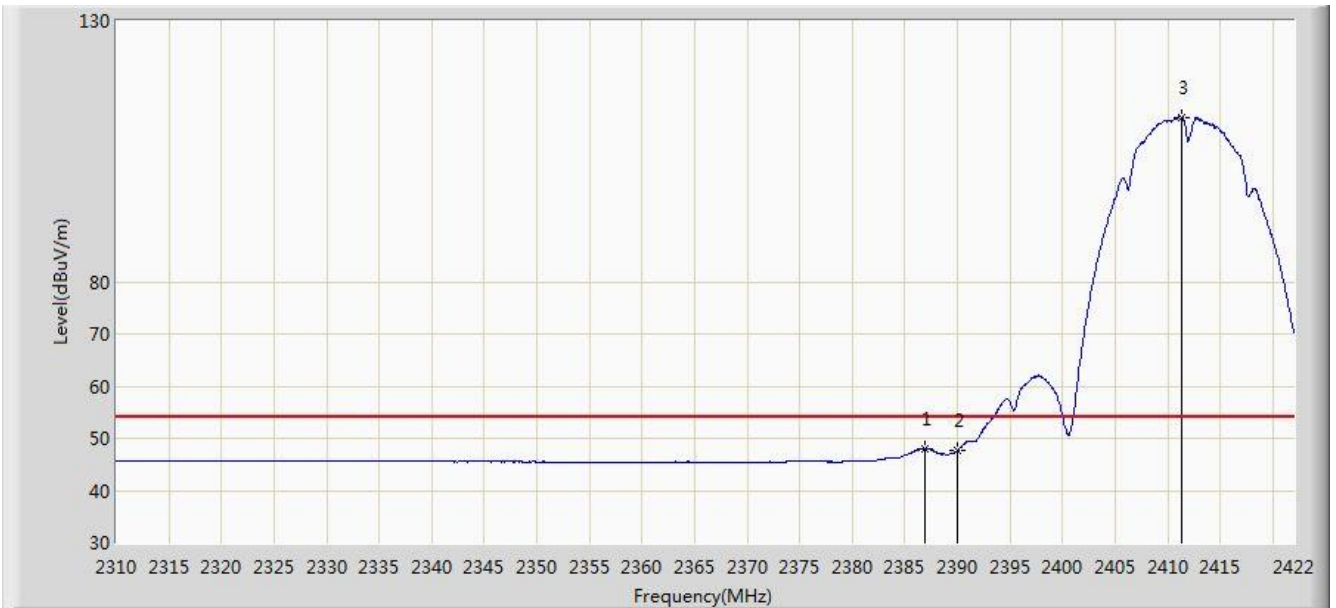


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2386.944        | 47.950                 | 15.391               | -6.050          | 54.000         | 32.558      | AV   |
| 2  |      |      | 2390.000        | 47.576                 | 15.022               | -6.424          | 54.000         | 32.554      | AV   |
| 3  | X    | *    | 2411.304        | 111.523                | 78.997               | N/A             | N/A            | 32.526      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:16 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |

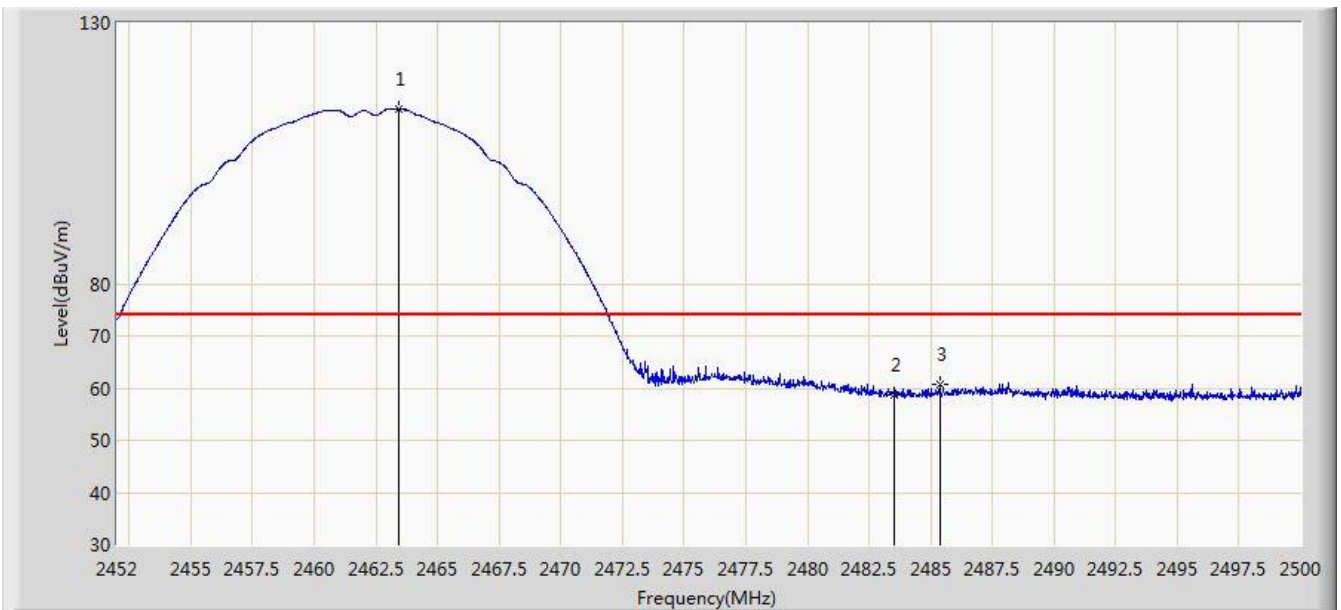

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2463.400        | 113.539                | 81.019               | N/A             | N/A            | 32.520      | PK   |
| 2  |      |      | 2483.500        | 58.793                 | 26.212               | -15.207         | 74.000         | 32.580      | PK   |
| 3  |      |      | 2485.360        | 60.633                 | 28.047               | -13.367         | 74.000         | 32.587      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:18 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | X    | *    | 2461.072        | 109.729                | 77.214               | N/A             | N/A            | 32.514      | AV   |
| 2  |      |      | 2483.500        | 46.444                 | 13.863               | -7.556          | 54.000         | 32.580      | AV   |
| 3  |      |      | 2487.352        | 47.191                 | 14.599               | -6.809          | 54.000         | 32.592      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:20 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Vertical       |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |

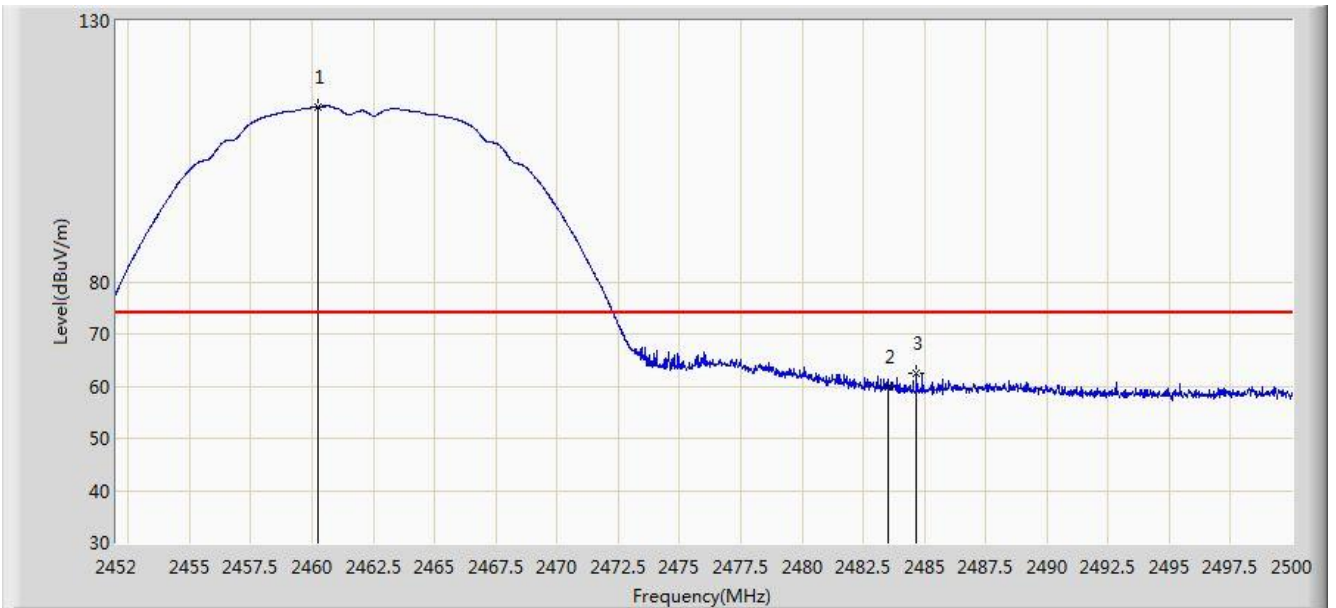

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2460.256        | 113.575                | 81.062               | N/A             | N/A            | 32.513      | PK   |
| 2  |      |      | 2483.500        | 59.982                 | 27.401               | -14.018         | 74.000         | 32.580      | PK   |
| 3  |      |      | 2484.688        | 62.420                 | 29.836               | -11.580         | 74.000         | 32.584      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:22 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Vertical       |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2461.240        | 109.550                | 77.035               | N/A             | N/A            | 32.515      | AV   |
| 2  |      |      | 2483.500        | 47.407                 | 14.826               | -6.593          | 54.000         | 32.580      | AV   |
| 3  |      |      | 2488.480        | 48.057                 | 15.461               | -5.943          | 54.000         | 32.595      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:34 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

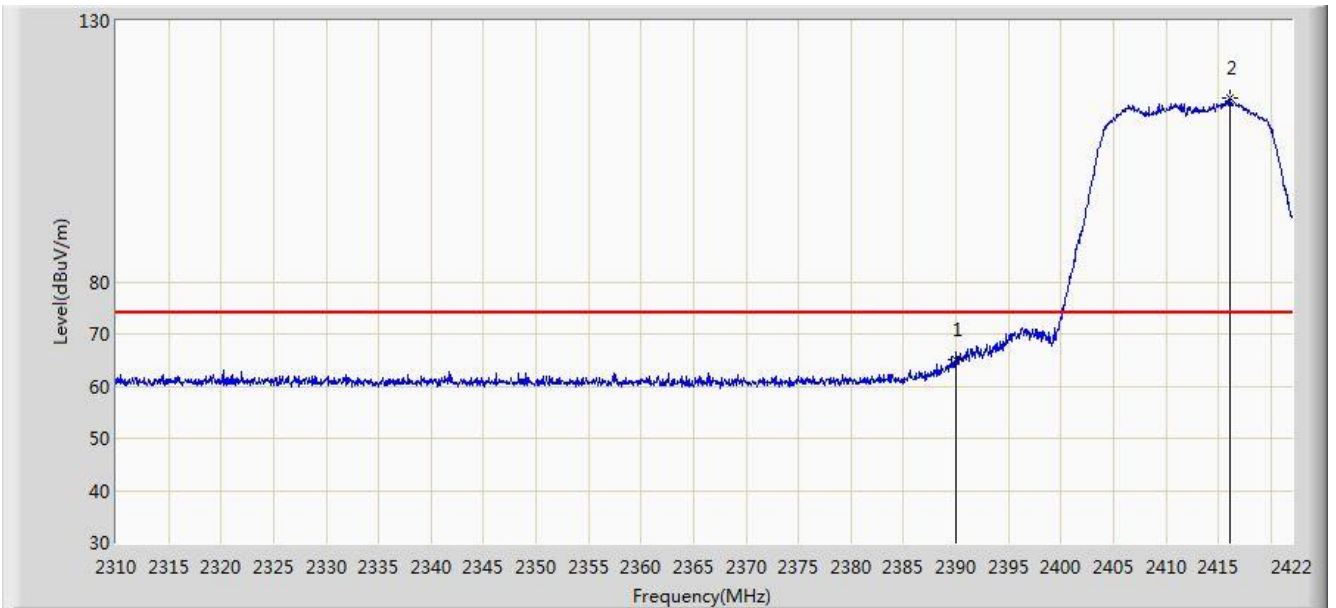


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 65.016                 | 32.462               | -8.984          | 74.000         | 32.554      | PK   |
| 2  |      | *    | 2416.064        | 115.085                | 82.564               | N/A             | N/A            | 32.521      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:35 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

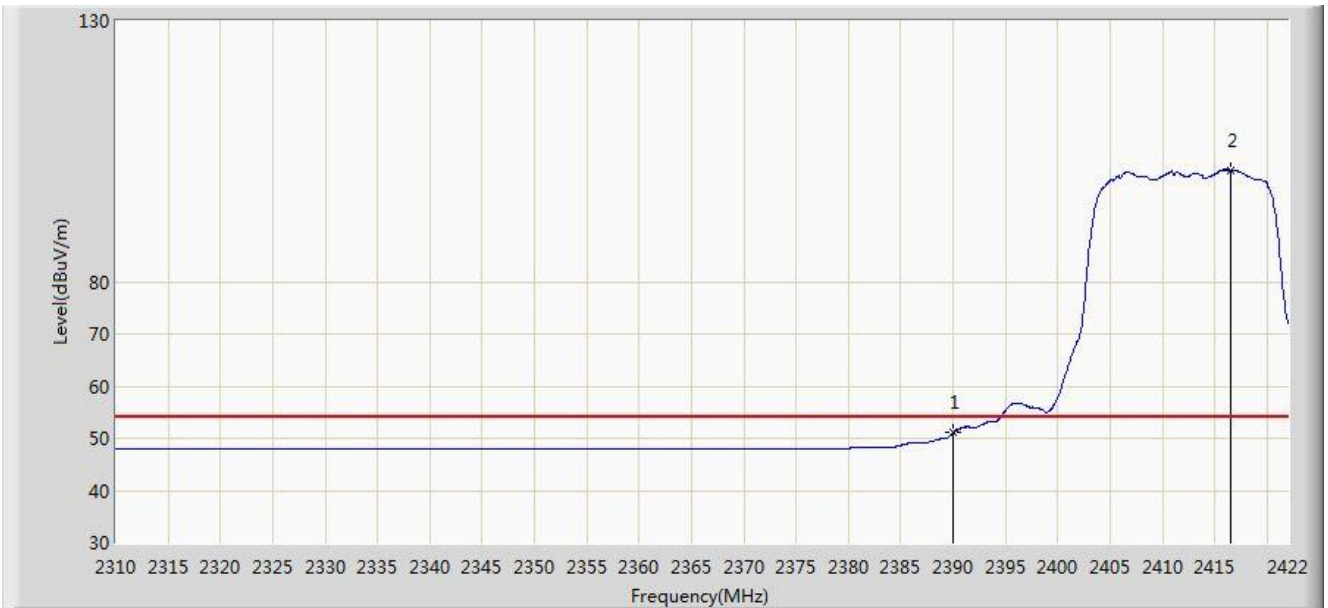


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 51.019                 | 18.465               | -2.981          | 54.000         | 32.554      | AV   |
| 2  |      | *    | 2416.568        | 101.433                | 68.913               | N/A             | N/A            | 32.521      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:33 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Vertical       |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

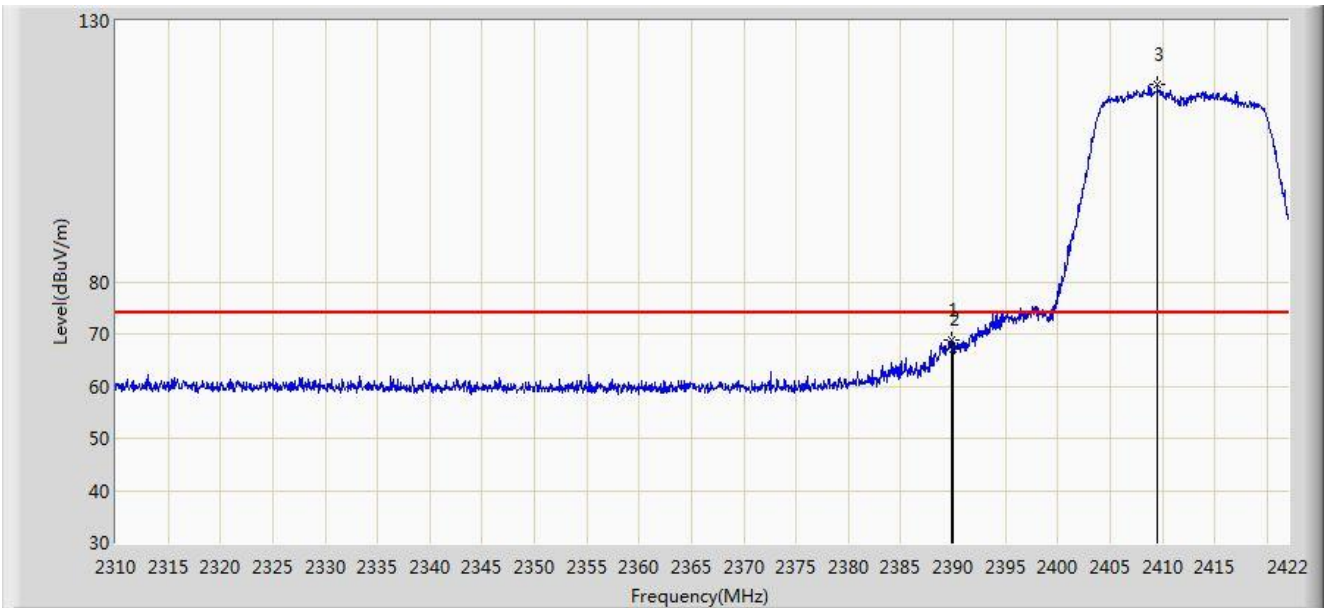


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.912        | 68.885                 | 36.330               | -5.115          | 74.000         | 32.555      | PK   |
| 2  |      |      | 2390.000        | 67.238                 | 34.684               | -6.762          | 74.000         | 32.554      | PK   |
| 3  |      | *    | 2409.512        | 117.842                | 85.313               | N/A             | N/A            | 32.529      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:32 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Vertical       |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

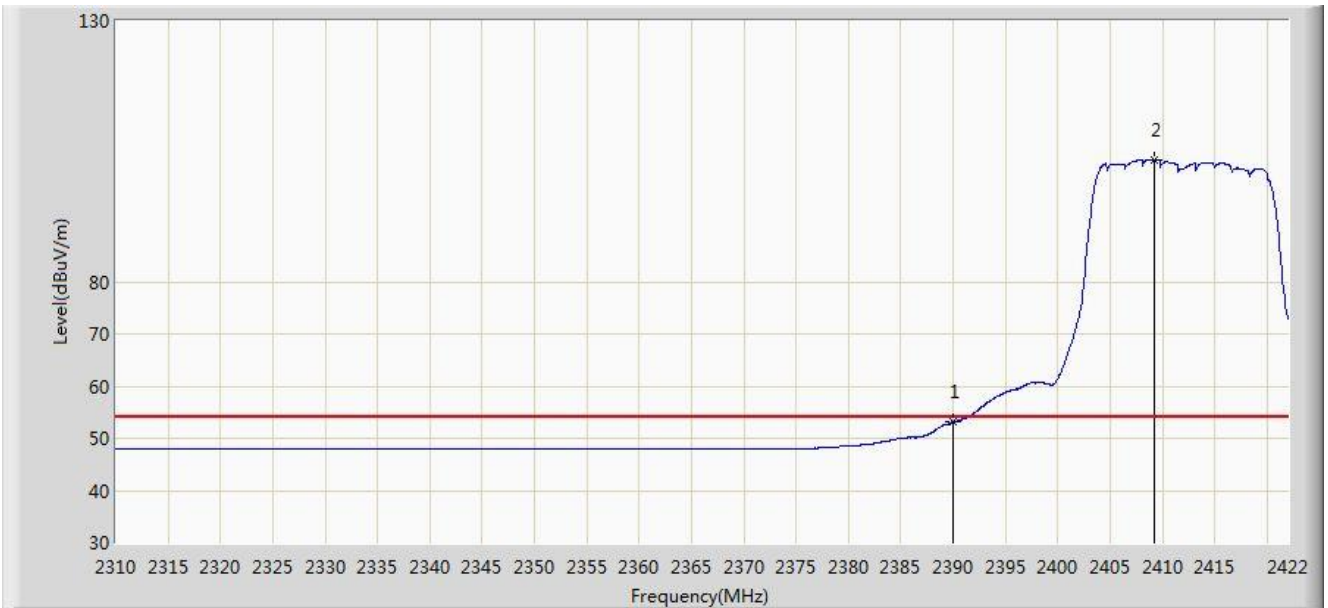


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 53.174                 | 20.620               | -0.826          | 54.000         | 32.554      | AV   |
| 2  |      | *    | 2409.232        | 103.452                | 70.923               | N/A             | N/A            | 32.529      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:42 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |

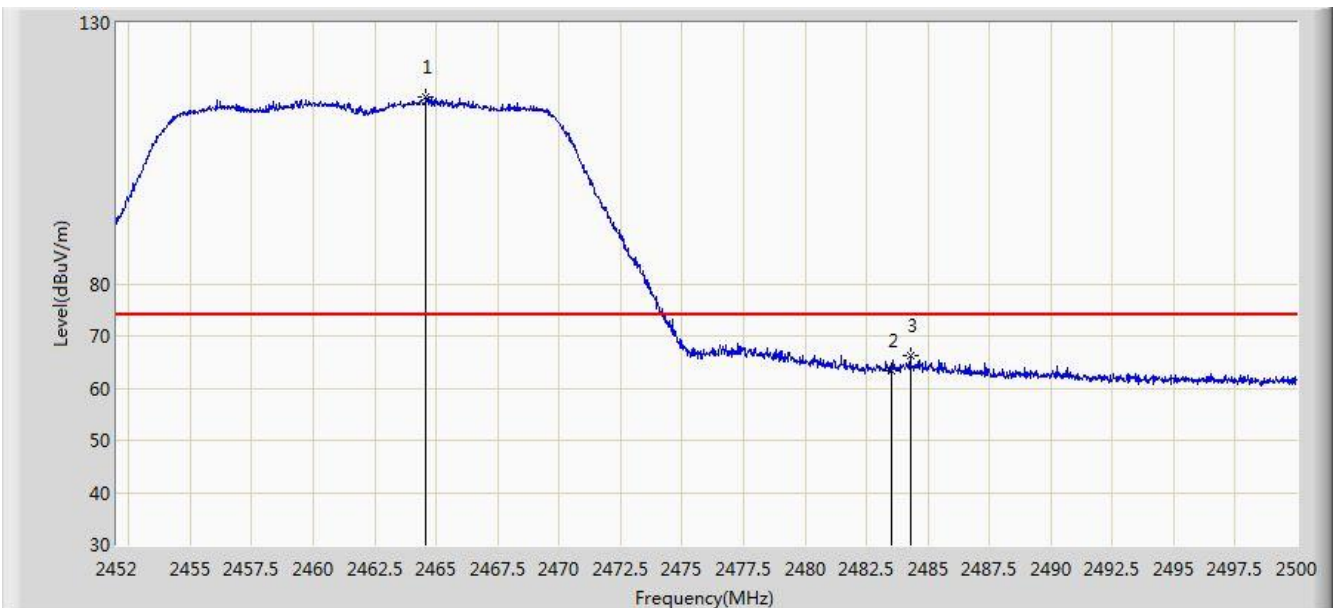


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2464.600        | 115.724                | 83.200               | N/A             | N/A            | 32.524      | PK   |
| 2  |      |      | 2483.500        | 63.306                 | 30.725               | -10.694         | 74.000         | 32.580      | PK   |
| 3  |      |      | 2484.280        | 66.311                 | 33.728               | -7.689          | 74.000         | 32.583      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:44 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |

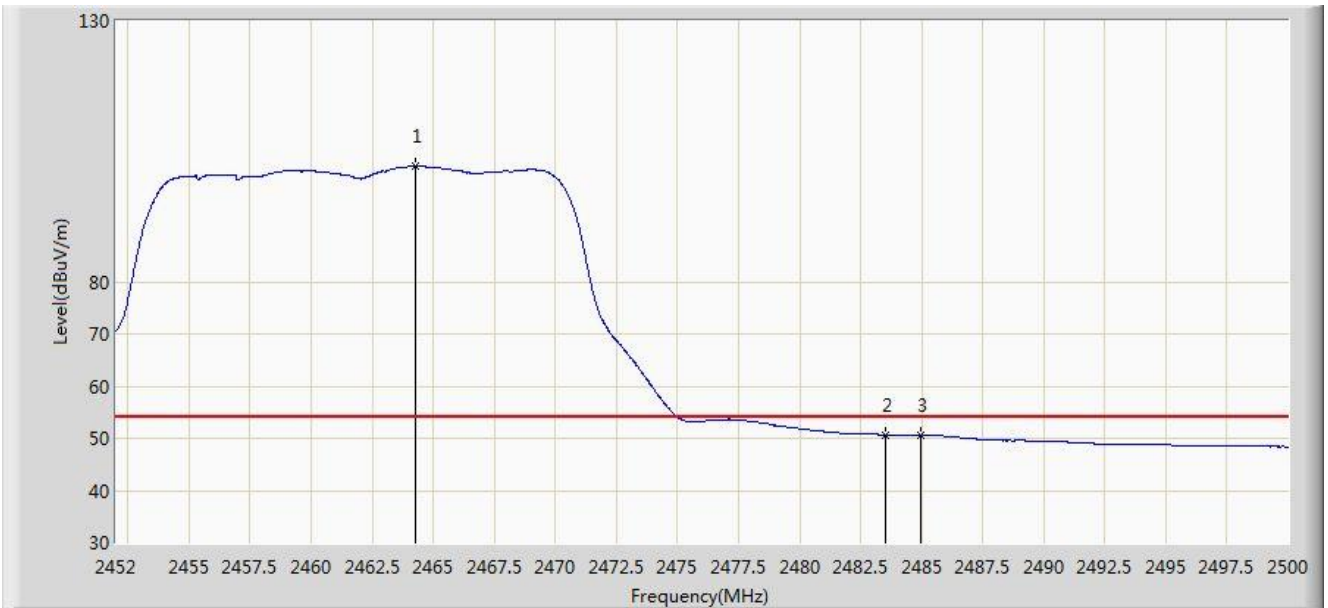


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2464.288        | 102.155                | 69.632               | N/A             | N/A            | 32.523      | AV   |
| 2  |      |      | 2483.500        | 50.663                 | 18.082               | -3.337          | 54.000         | 32.580      | AV   |
| 3  |      |      | 2484.976        | 50.668                 | 18.083               | -3.332          | 54.000         | 32.585      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:41 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Vertical       |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |

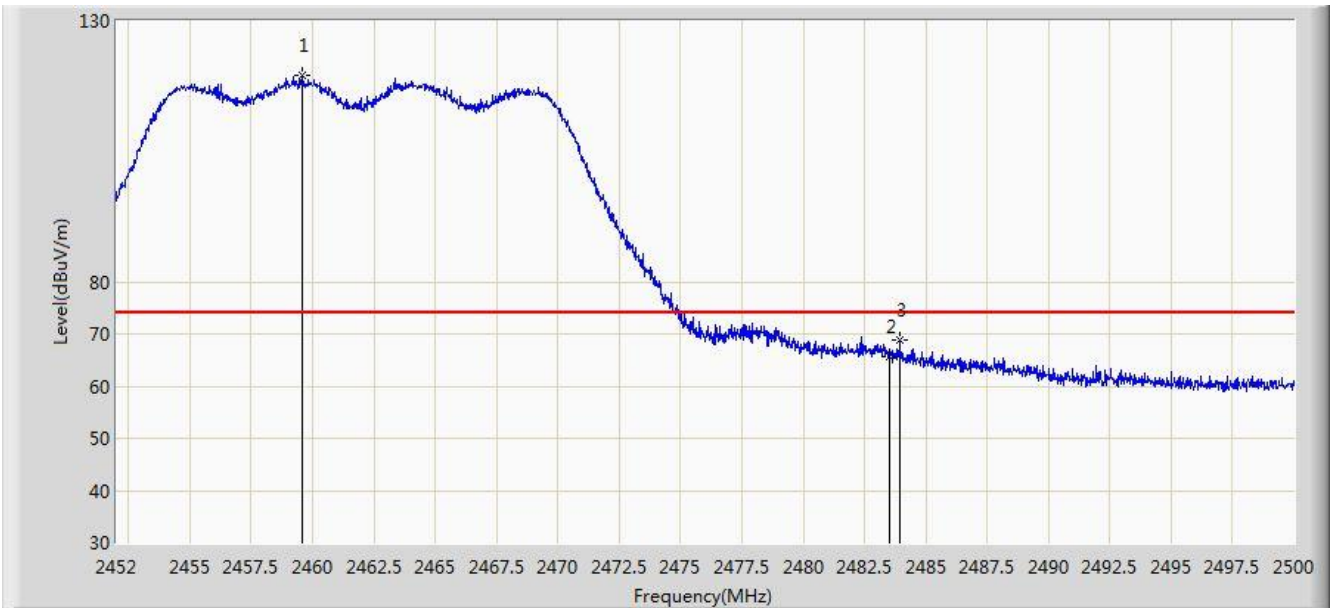


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2459.584        | 119.479                | 86.967               | N/A             | N/A            | 32.513      | PK   |
| 2  |      |      | 2483.500        | 65.601                 | 33.020               | -8.399          | 74.000         | 32.580      | PK   |
| 3  |      |      | 2483.944        | 68.782                 | 36.200               | -5.218          | 74.000         | 32.582      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2017/09/02 - 05:40 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                            | Polarity: Vertical       |
| EUT: ACCESS POINT                                                      | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |

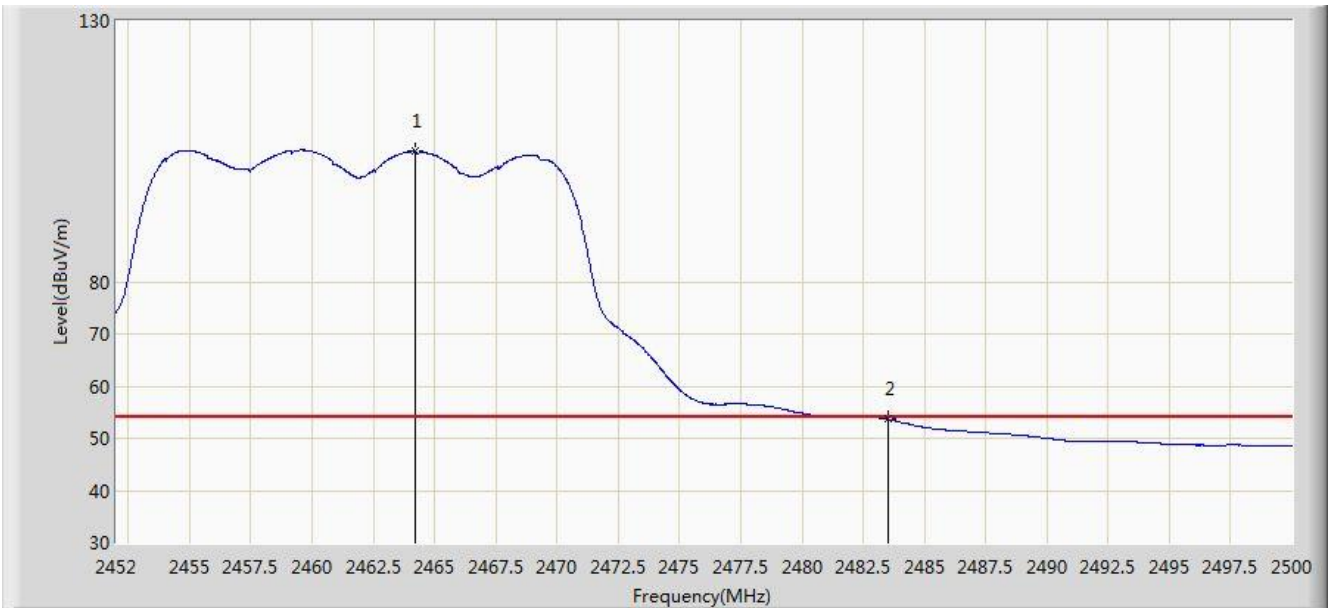


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2464.216        | 105.012                | 72.489               | N/A             | N/A            | 32.523      | AV   |
| 2  |      |      | 2483.500        | 53.657                 | 21.076               | -0.343          | 54.000         | 32.580      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 05:55 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

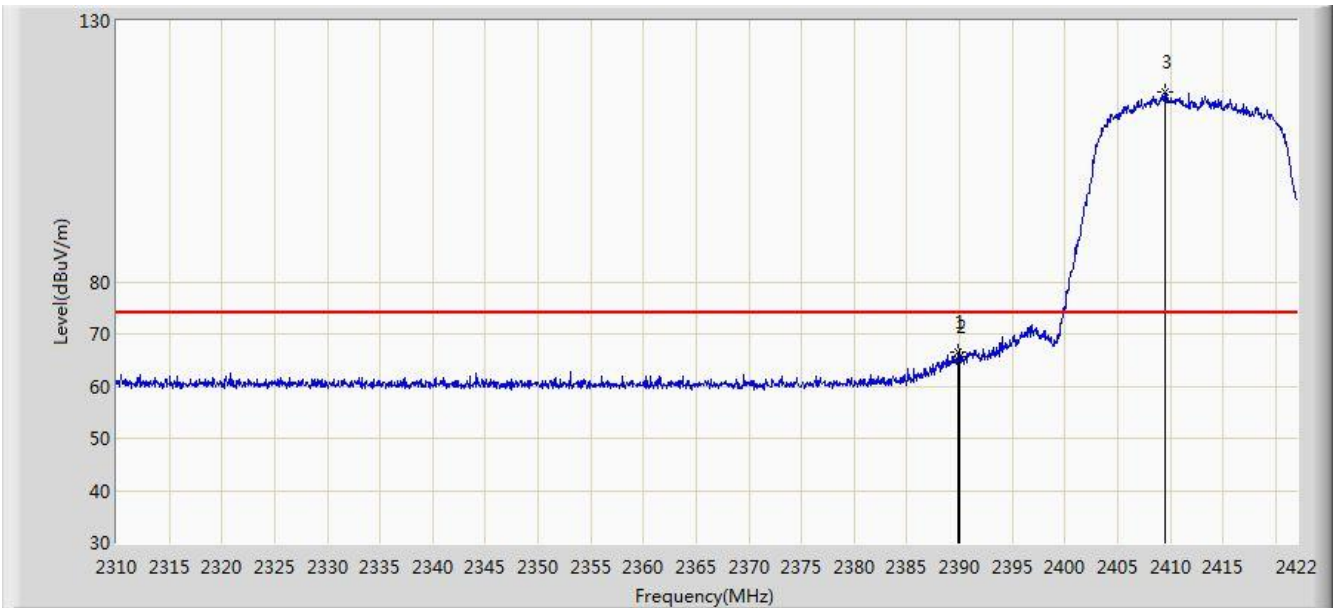


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2389.912        | 66.552                 | 33.997               | -7.448          | 74.000         | 32.555      | PK   |
| 2  |      |      | 2390.000        | 65.514                 | 32.960               | -8.486          | 74.000         | 32.554      | PK   |
| 3  |      | *    | 2409.456        | 116.306                | 83.777               | N/A             | N/A            | 32.529      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 05:56 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

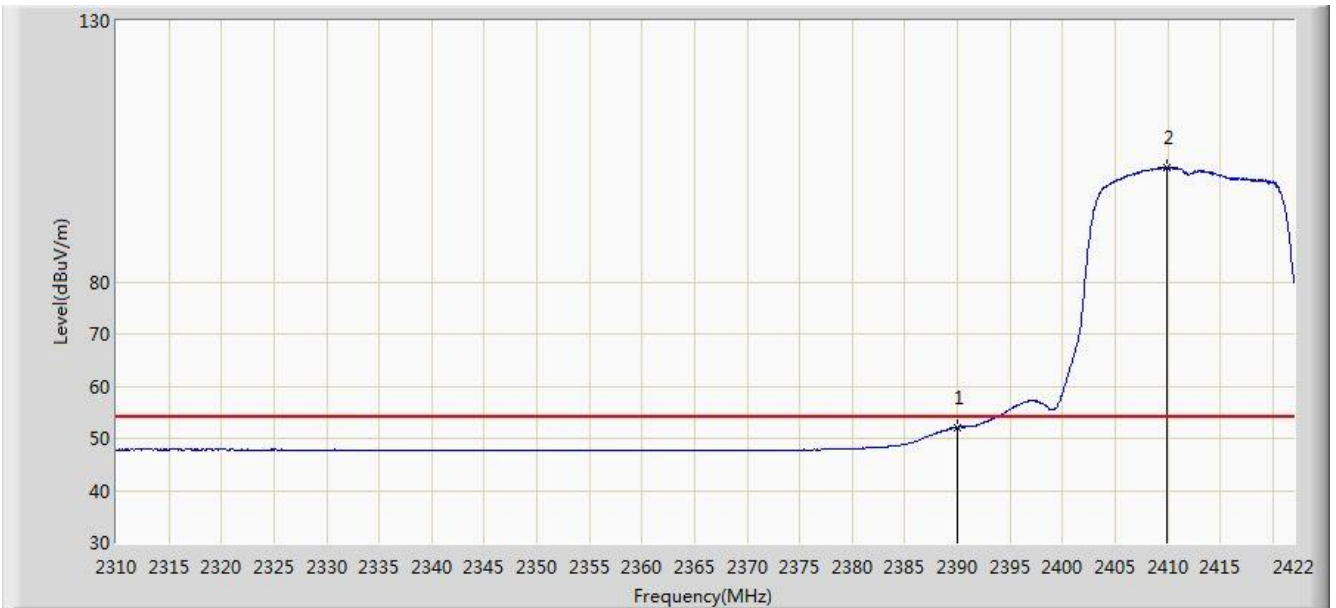


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 52.149                 | 19.595               | -1.851          | 54.000         | 32.554      | AV   |
| 2  |      | *    | 2409.904        | 101.834                | 69.306               | N/A             | N/A            | 32.529      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 05:54 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Vertical       |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

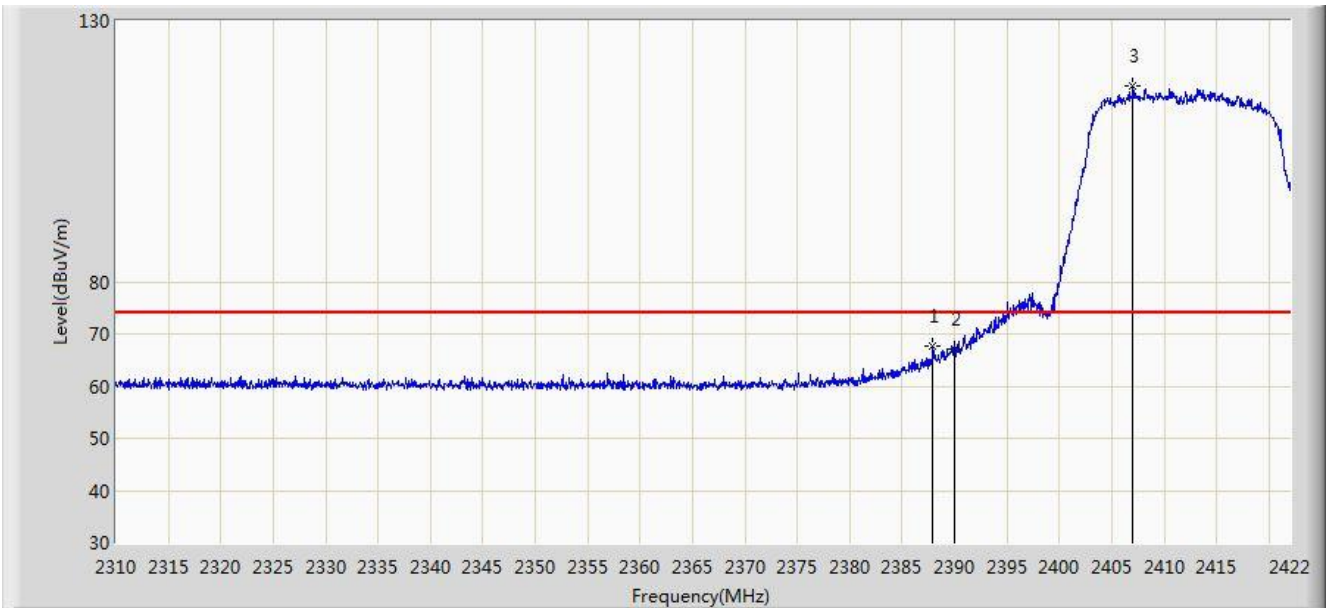


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2387.952        | 67.739                 | 35.182               | -6.261          | 74.000         | 32.558      | PK   |
| 2  |      |      | 2390.000        | 67.128                 | 34.574               | -6.872          | 74.000         | 32.554      | PK   |
| 3  |      | *    | 2407.048        | 117.500                | 84.968               | N/A             | N/A            | 32.532      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 05:53 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Vertical       |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1 (CDD Mode) |                          |

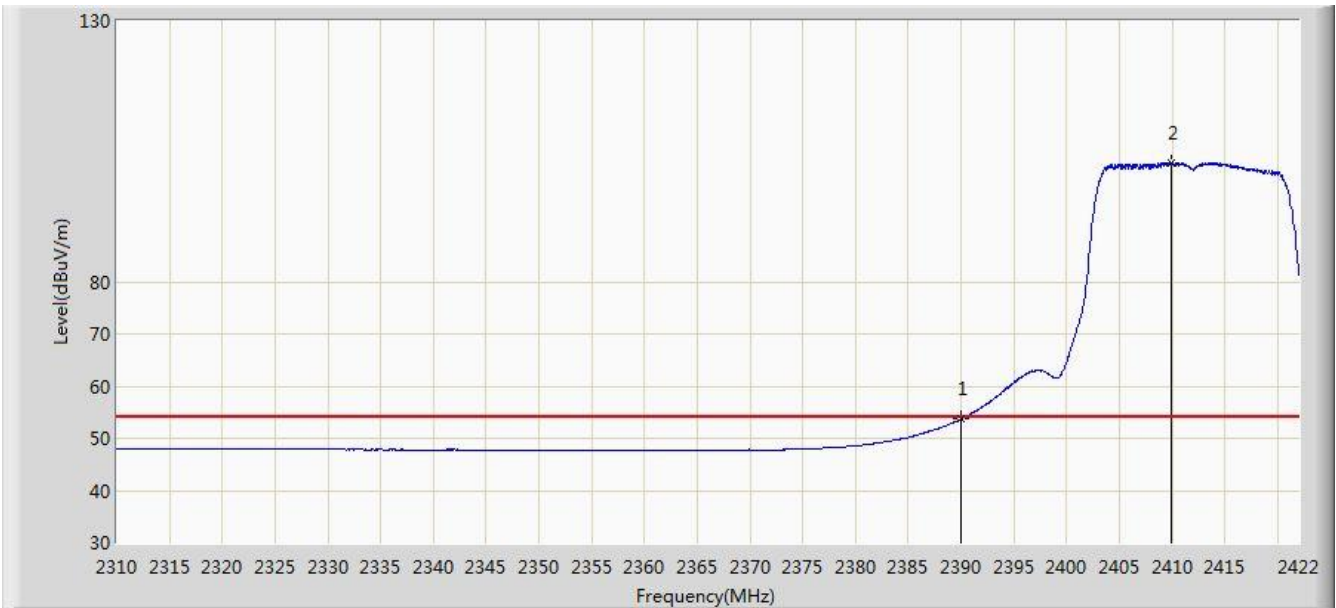


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 53.663                 | 21.109               | -0.337          | 54.000         | 32.554      | AV   |
| 2  |      | *    | 2409.904        | 102.739                | 70.211               | N/A             | N/A            | 32.529      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 06:05 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |

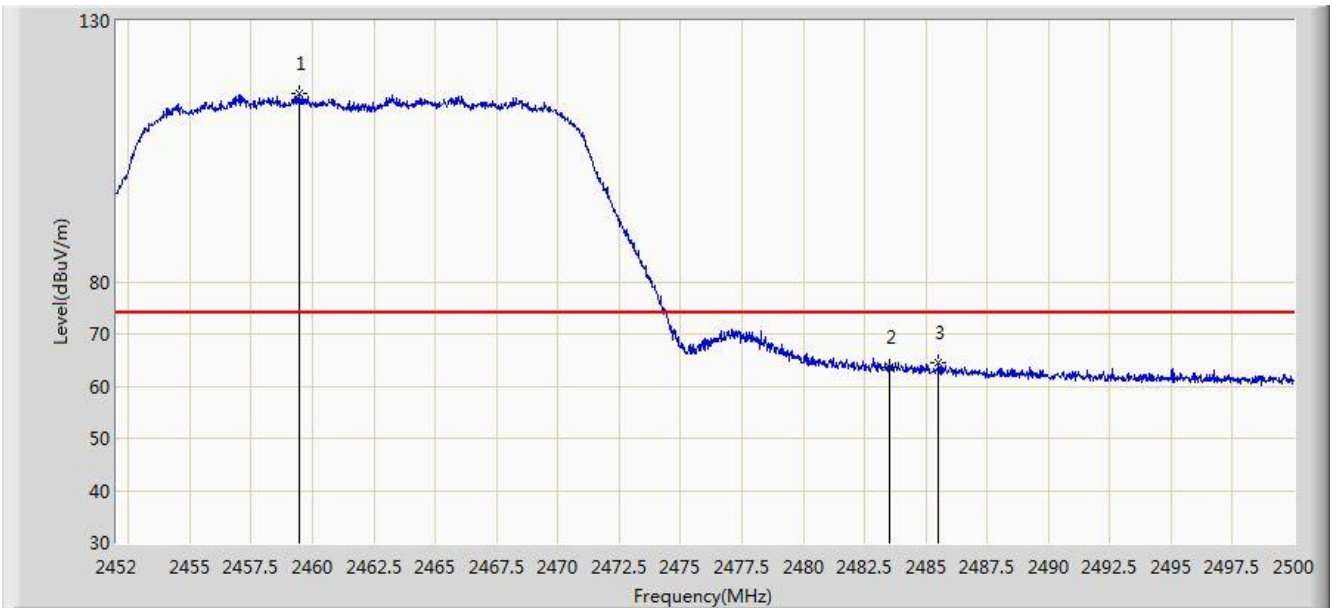


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2459.440        | 116.033                | 83.521               | N/A             | N/A            | 32.511      | PK   |
| 2  |      |      | 2483.500        | 63.725                 | 31.144               | -10.275         | 74.000         | 32.580      | PK   |
| 3  |      |      | 2485.504        | 64.449                 | 31.862               | -9.551          | 74.000         | 32.587      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 06:07 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |

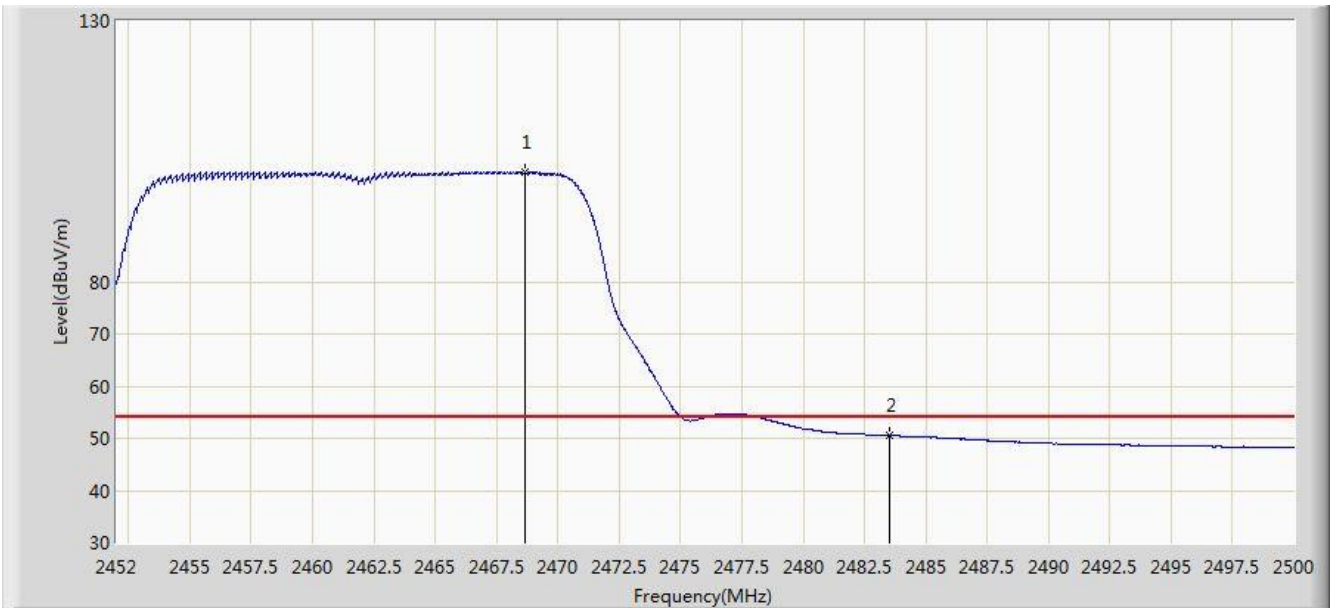


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2468.656        | 101.006                | 68.470               | N/A             | N/A            | 32.536      | AV   |
| 2  |      |      | 2483.500        | 50.511                 | 17.930               | -3.489          | 54.000         | 32.580      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 06:04 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Vertical       |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |

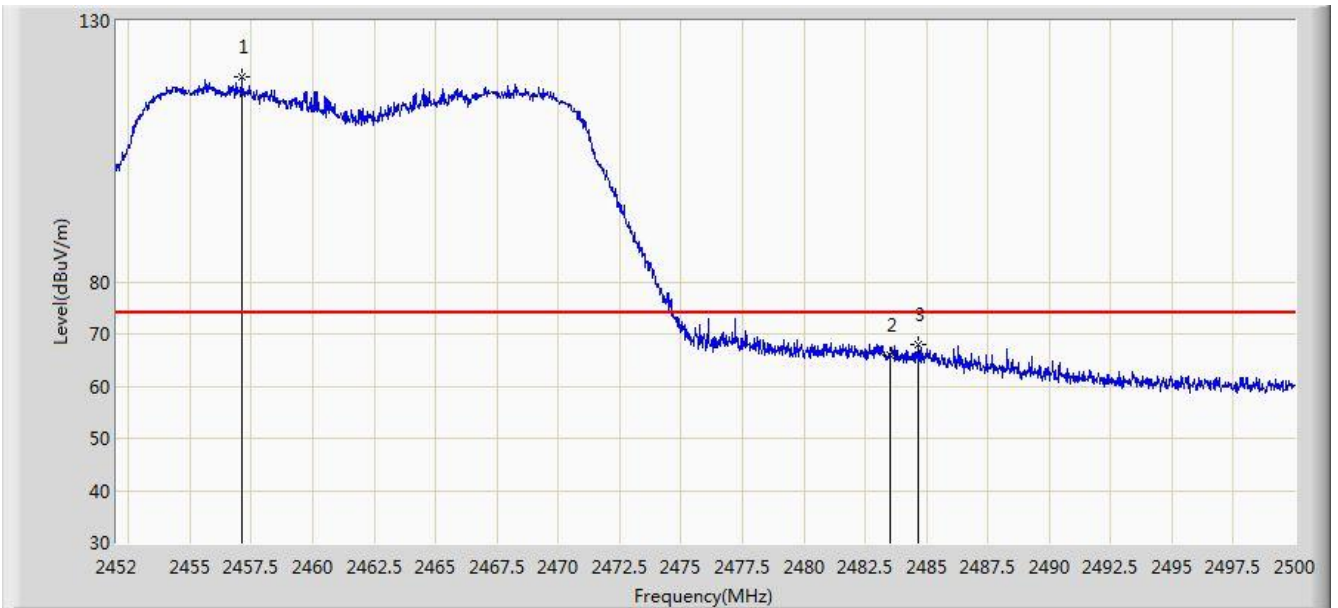


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2457.088        | 119.160                | 86.652               | N/A             | N/A            | 32.508      | PK   |
| 2  |      |      | 2483.500        | 66.064                 | 33.483               | -7.936          | 74.000         | 32.580      | PK   |
| 3  |      |      | 2484.664        | 68.044                 | 35.460               | -5.956          | 74.000         | 32.584      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 06:03 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Vertical       |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1 (CDD Mode) |                          |

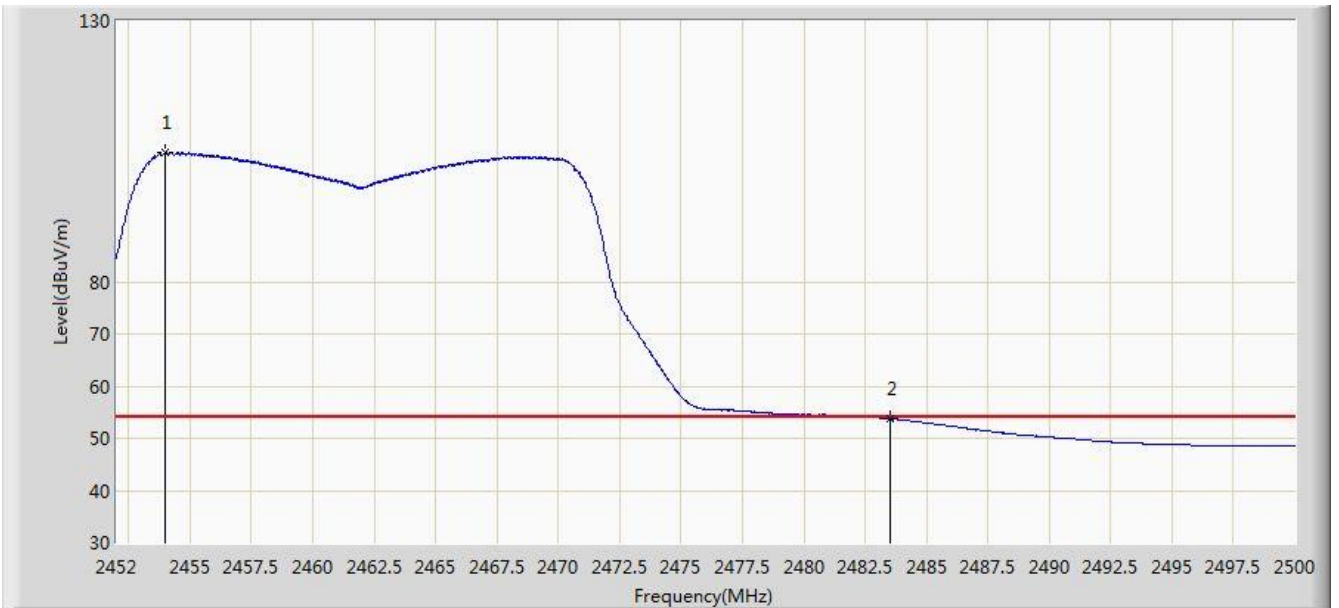


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2453.992        | 104.708                | 72.206               | N/A             | N/A            | 32.502      | AV   |
| 2  |      |      | 2483.500        | 53.727                 | 21.146               | -0.273          | 54.000         | 32.580      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 06:21 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1 (CDD Mode) |                          |

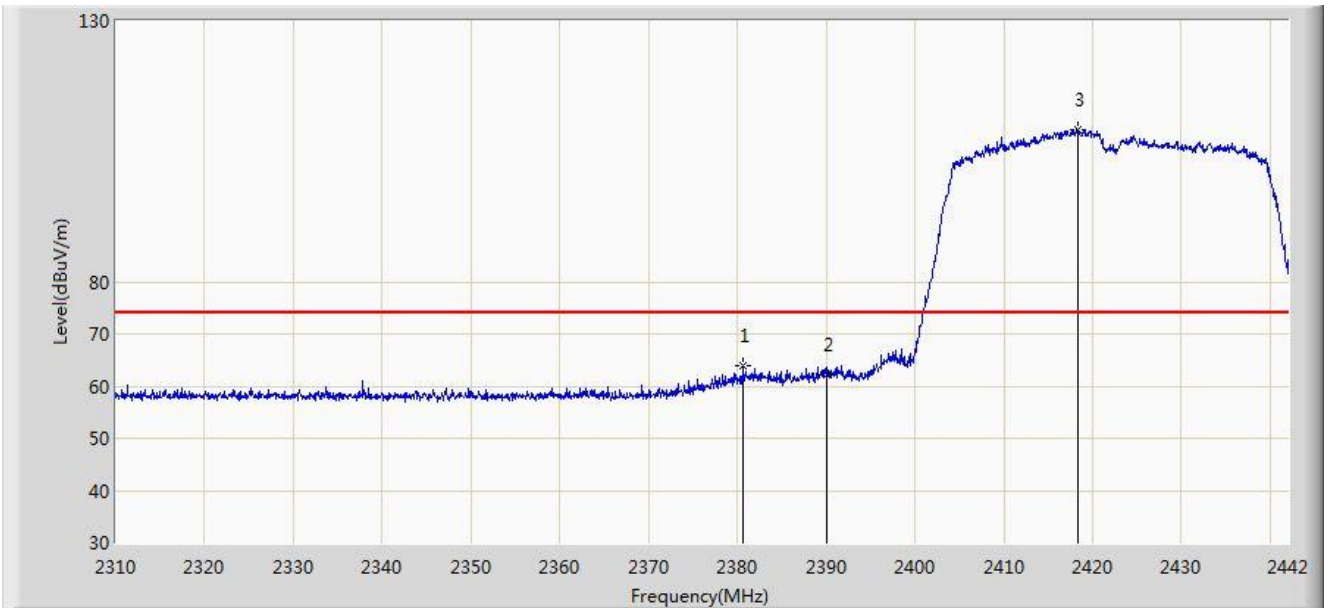


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2380.686        | 63.956                 | 31.389               | -10.044         | 74.000         | 32.567      | PK   |
| 2  |      |      | 2390.000        | 62.096                 | 29.542               | -11.904         | 74.000         | 32.554      | PK   |
| 3  |      | *    | 2418.372        | 109.051                | 76.533               | N/A             | N/A            | 32.518      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 06:23 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1 (CDD Mode) |                          |

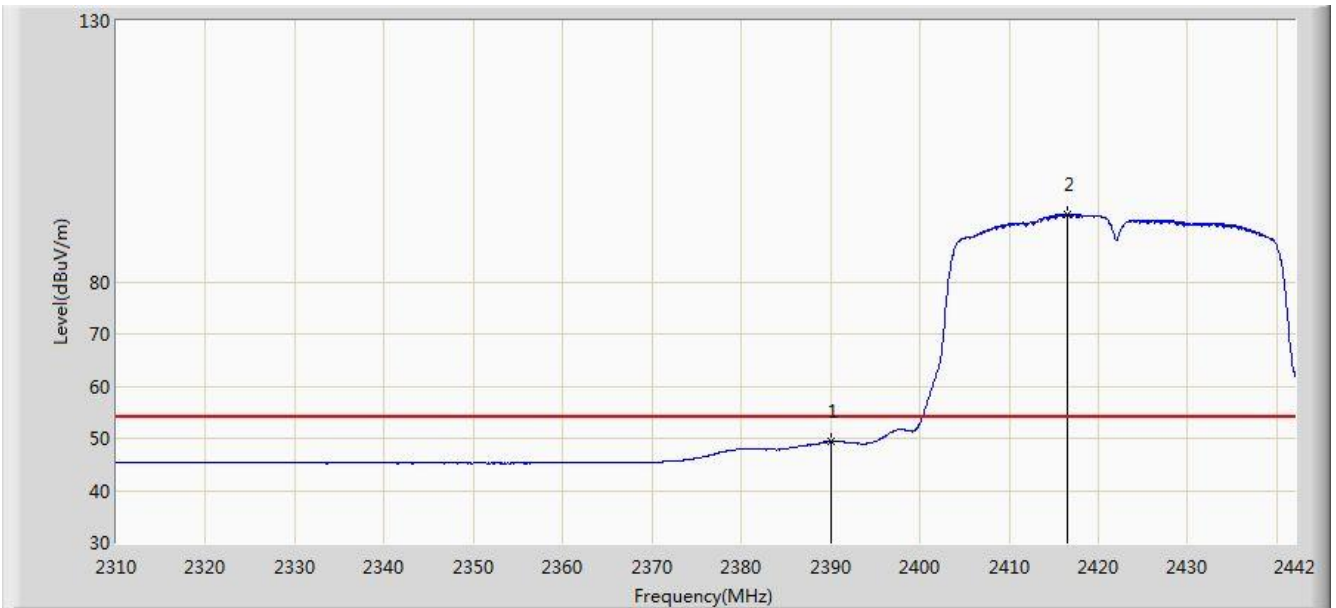


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 49.374                 | 16.820               | -4.626          | 54.000         | 32.554      | AV   |
| 2  |      | *    | 2416.458        | 92.890                 | 60.370               | N/A             | N/A            | 32.520      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 06:20 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Vertical       |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1 (CDD Mode) |                          |

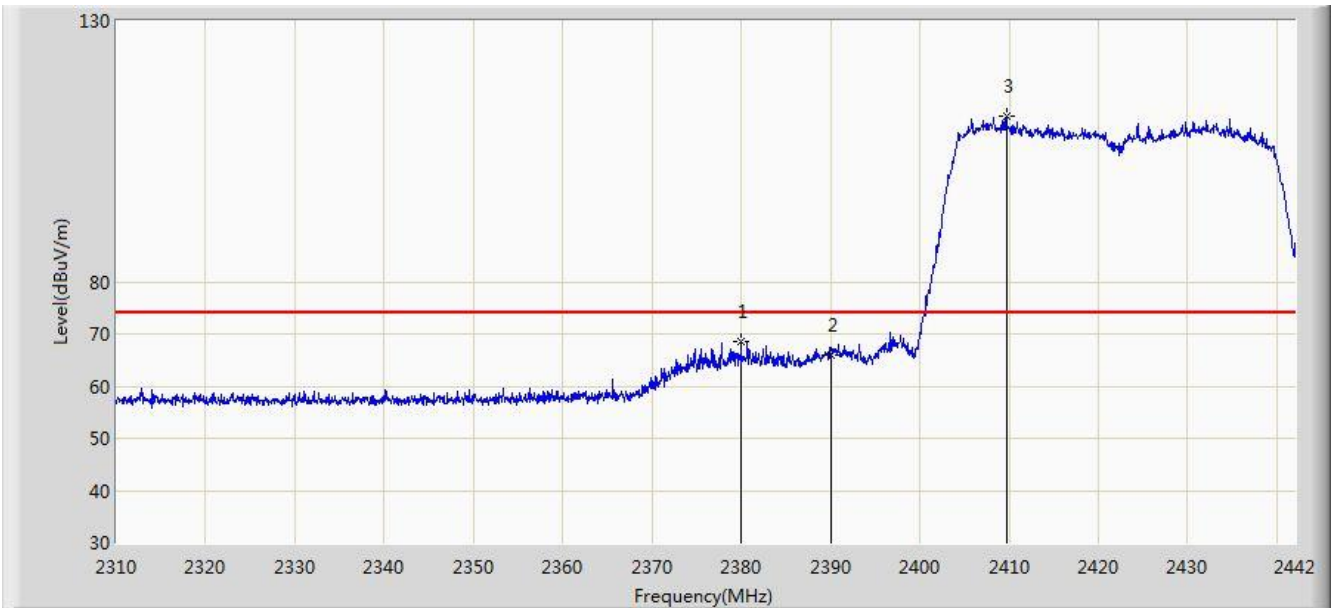


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2379.960        | 68.533                 | 35.965               | -5.467          | 74.000         | 32.568      | PK   |
| 2  |      |      | 2390.000        | 66.039                 | 33.485               | -7.961          | 74.000         | 32.554      | PK   |
| 3  |      | *    | 2409.726        | 111.637                | 79.109               | N/A             | N/A            | 32.528      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/09/02 - 06:20 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Vertical       |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1 (CDD Mode) |                          |

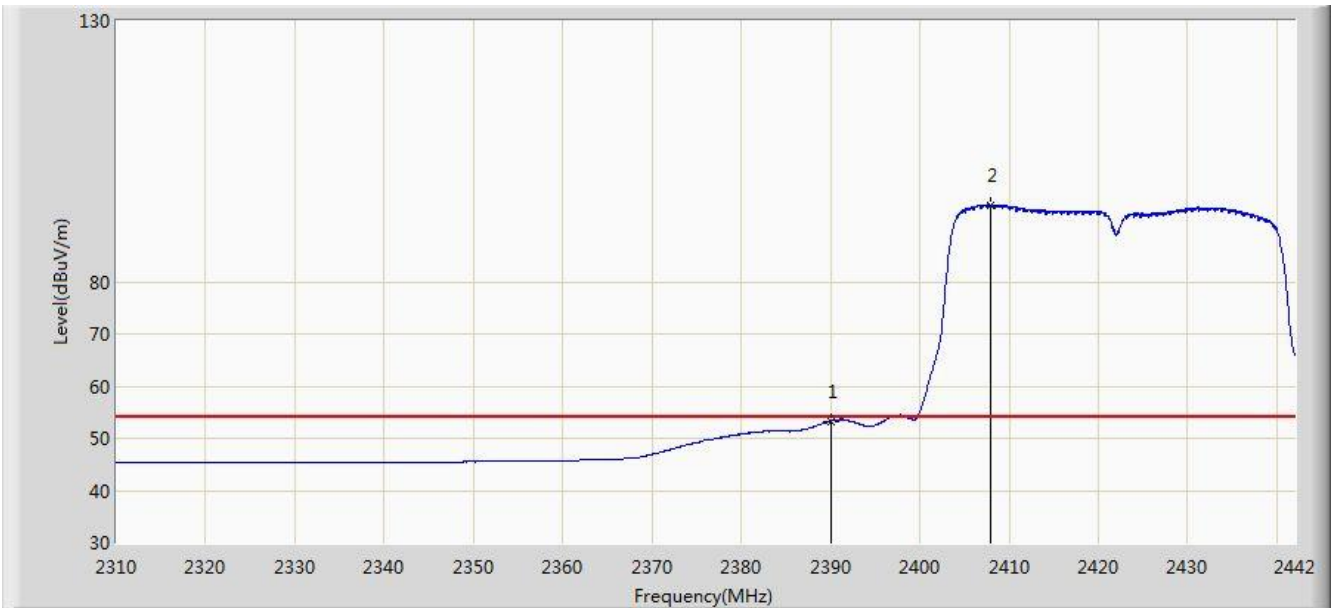


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 53.303                 | 20.749               | -0.697          | 54.000         | 32.554      | AV   |
| 2  |      | *    | 2407.944        | 94.754                 | 62.223               | N/A             | N/A            | 32.531      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/11/13 - 22:23 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Bacon          |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz Ant 0 + 1 (CDD Mode) |                          |

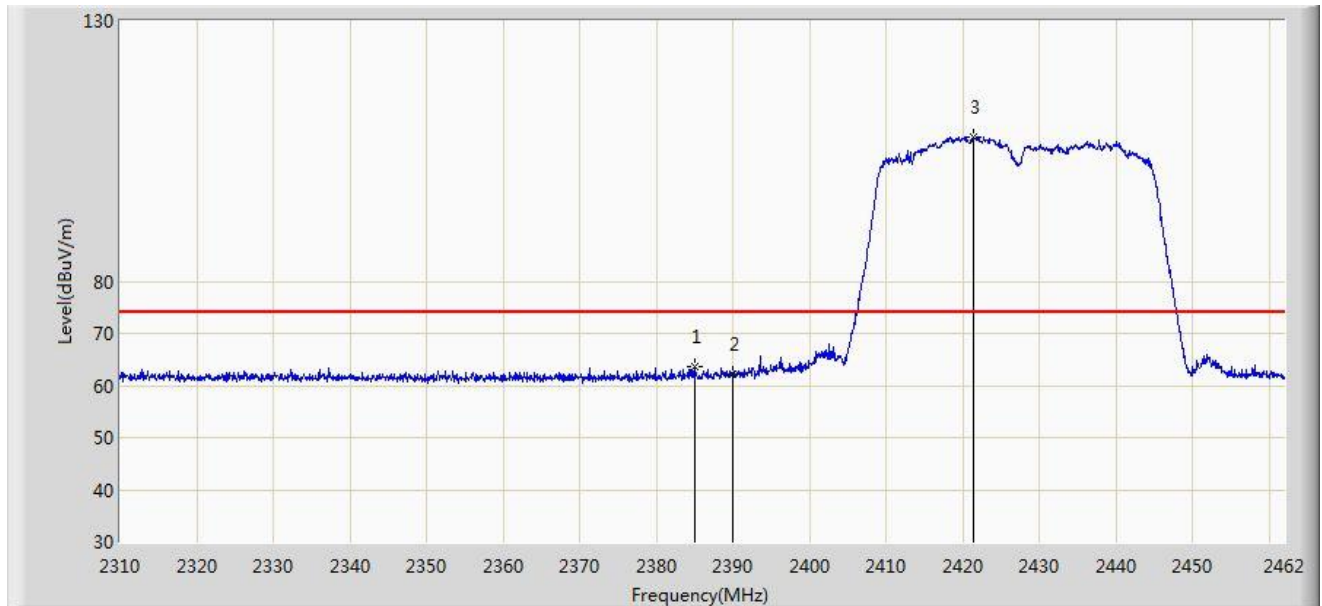


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2385.012        | 63.715                 | 31.154               | -10.285         | 74.000         | 32.561      | PK   |
| 2  |      |      | 2390.000        | 62.266                 | 29.712               | -11.734         | 74.000         | 32.554      | PK   |
| 3  |      | *    | 2421.492        | 107.561                | 75.047               | N/A             | N/A            | 32.515      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/11/13 - 22:24 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Bacon          |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz Ant 0 + 1 (CDD Mode) |                          |

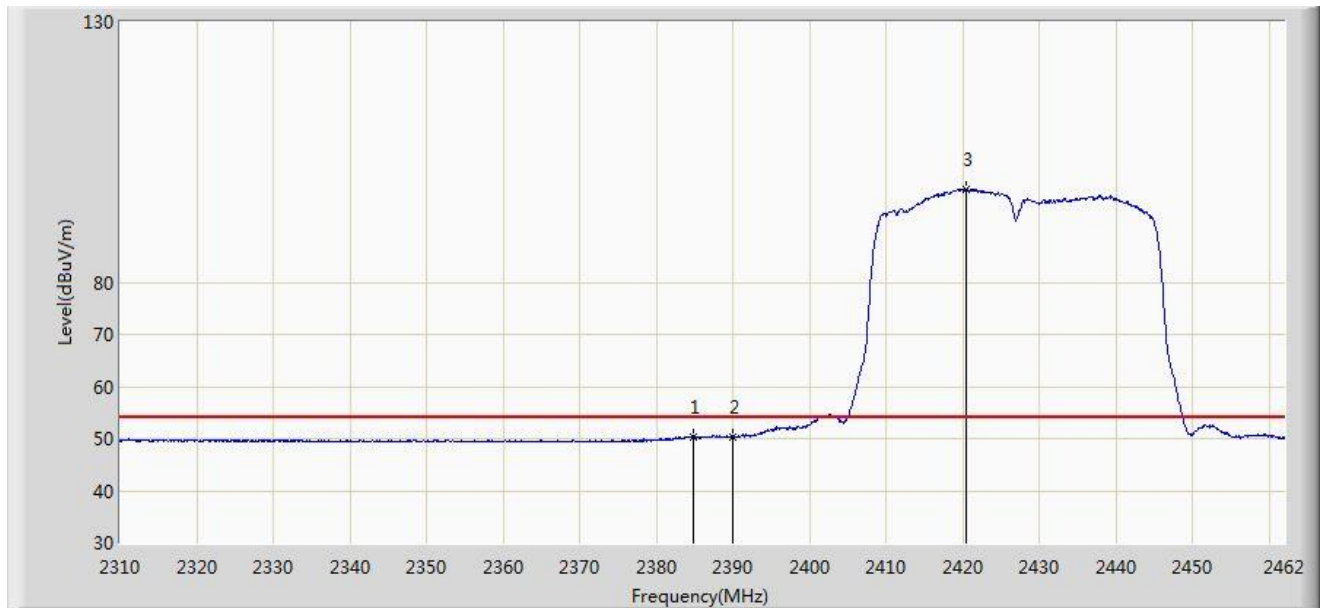


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2384.784        | 50.366                 | 17.804               | -3.634          | 54.000         | 32.562      | AV   |
| 2  |      |      | 2390.000        | 50.362                 | 17.808               | -3.638          | 54.000         | 32.554      | AV   |
| 3  |      | *    | 2420.428        | 97.897                 | 65.381               | N/A             | N/A            | 32.515      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/11/13 - 22:22 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Bacon          |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Vertical       |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz Ant 0 + 1 (CDD Mode) |                          |

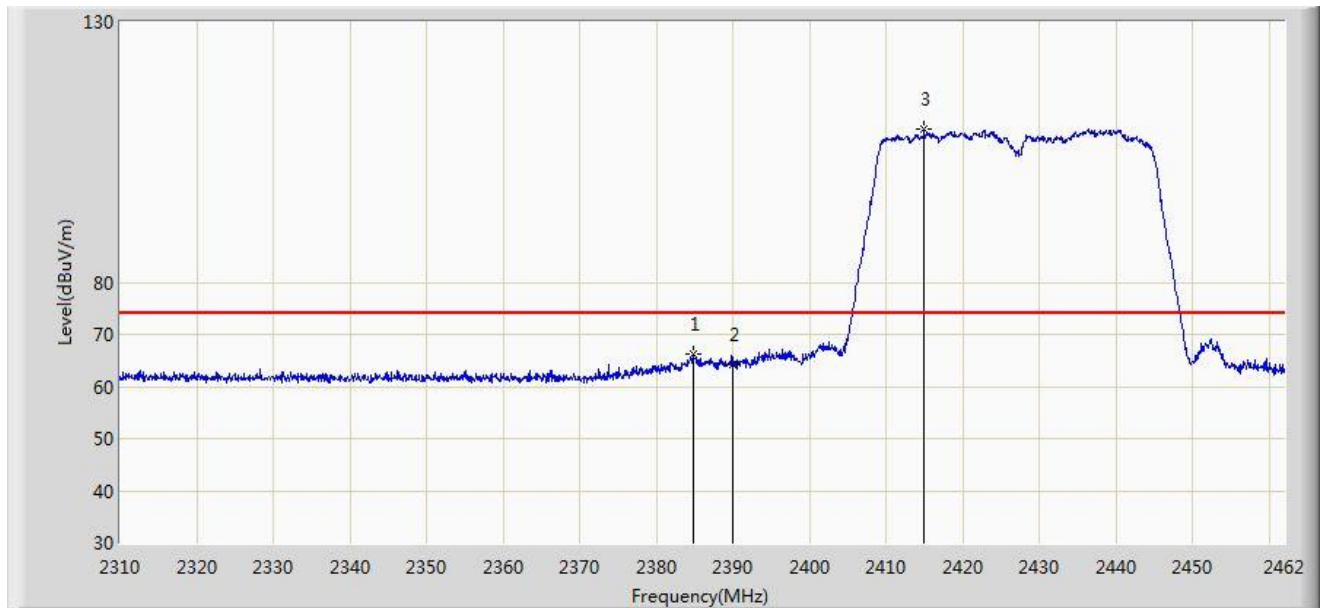


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2384.784        | 66.147                 | 33.585               | -7.853          | 74.000         | 32.562      | PK   |
| 2  |      |      | 2390.000        | 64.123                 | 31.569               | -9.877          | 74.000         | 32.554      | PK   |
| 3  |      | *    | 2415.032        | 109.446                | 76.924               | N/A             | N/A            | 32.522      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/11/13 - 22:19 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Bacon          |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Vertical       |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz Ant 0 + 1 (CDD Mode) |                          |

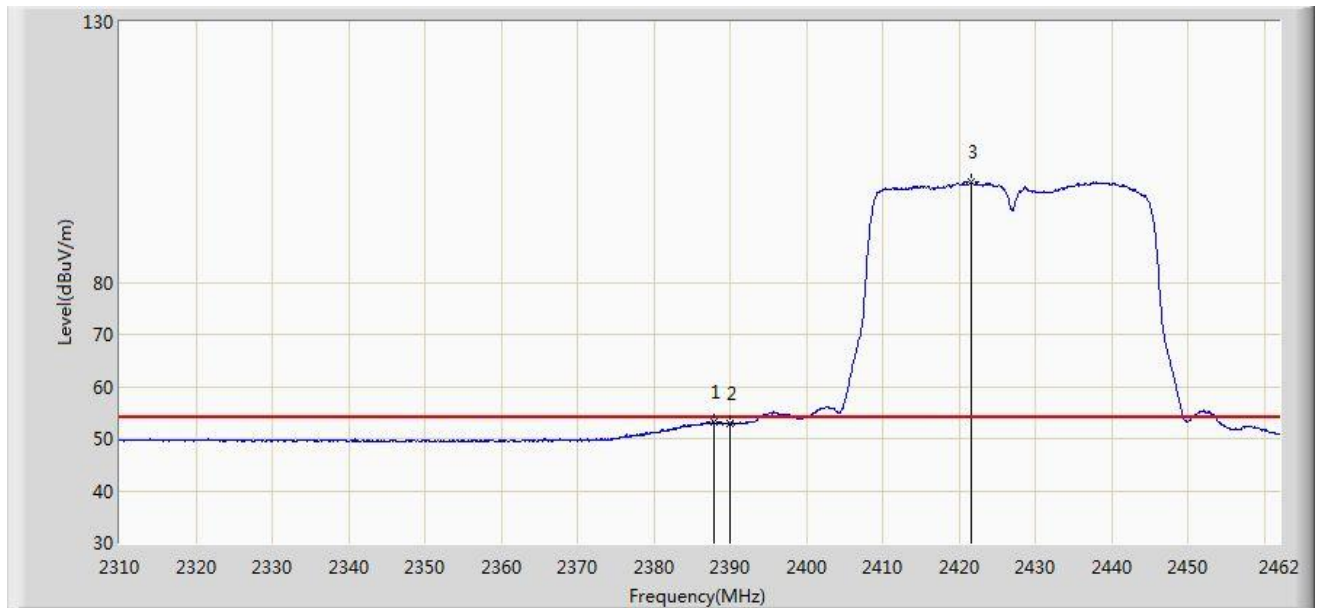

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2387.976        | 53.244                 | 20.687               | -0.756          | 54.000         | 32.558      | AV   |
| 2  |      |      | 2390.000        | 52.908                 | 20.354               | -1.092          | 54.000         | 32.554      | AV   |
| 3  |      | *    | 2421.644        | 99.137                 | 66.623               | N/A             | N/A            | 32.514      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/11/14 - 02:52 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1 (CDD Mode) |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2446.416        | 110.152                | 77.663               | N/A             | N/A            | 32.489      | PK   |
| 2  |      |      | 2483.500        | 62.867                 | 30.286               | -11.133         | 74.000         | 32.580      | PK   |
| 3  |      |      | 2492.996        | 64.071                 | 31.462               | -9.929          | 74.000         | 32.609      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/11/14 - 02:54 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1 (CDD Mode) |                          |

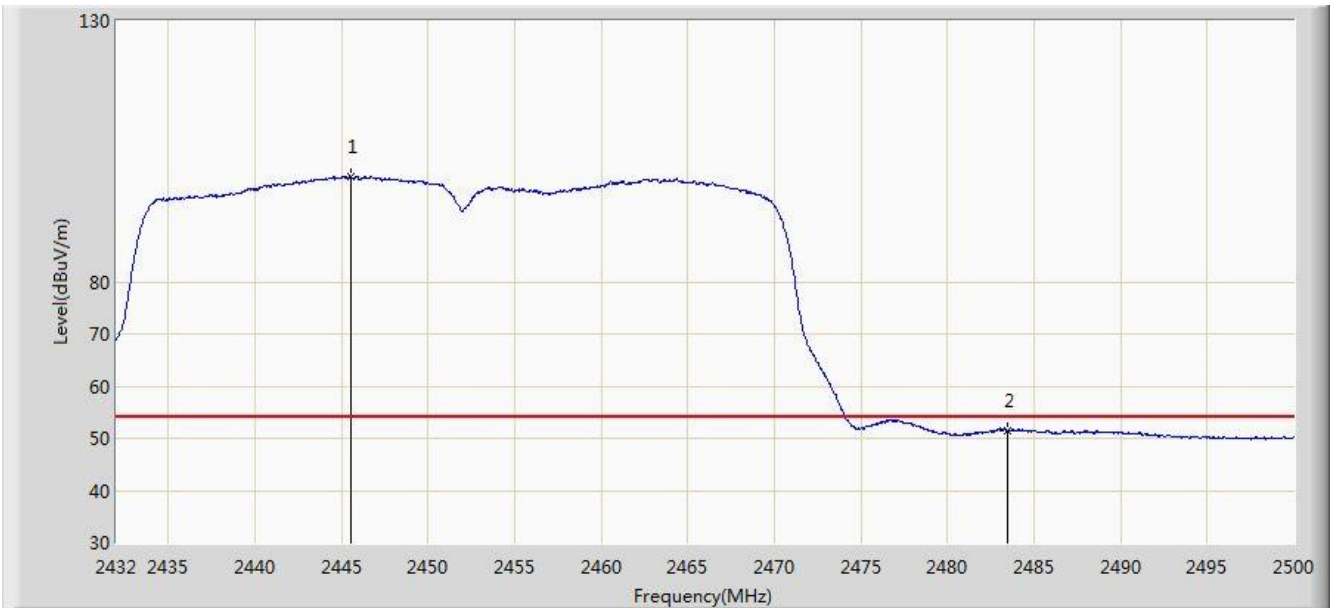

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2445.532        | 100.078                | 67.591               | N/A             | N/A            | 32.487      | AV   |
| 2  |      |      | 2483.500        | 51.510                 | 18.929               | -2.490          | 54.000         | 32.580      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/11/14 - 02:55 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Vertical       |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1 (CDD Mode) |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2445.498        | 113.183                | 80.696               | N/A             | N/A            | 32.487      | PK   |
| 2  |      |      | 2483.500        | 64.476                 | 31.895               | -9.524          | 74.000         | 32.580      | PK   |
| 3  |      |      | 2484.292        | 66.339                 | 33.756               | -7.661          | 74.000         | 32.583      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                                             |                          |
|-----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                   | Time: 2017/11/14 - 02:56 |
| Limit: NCC LP0002_1GHz-40GHz                                                | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                                 | Polarity: Vertical       |
| EUT: ACCESS POINT                                                           | Power: POE (DC 57V)      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1 (CDD Mode) |                          |

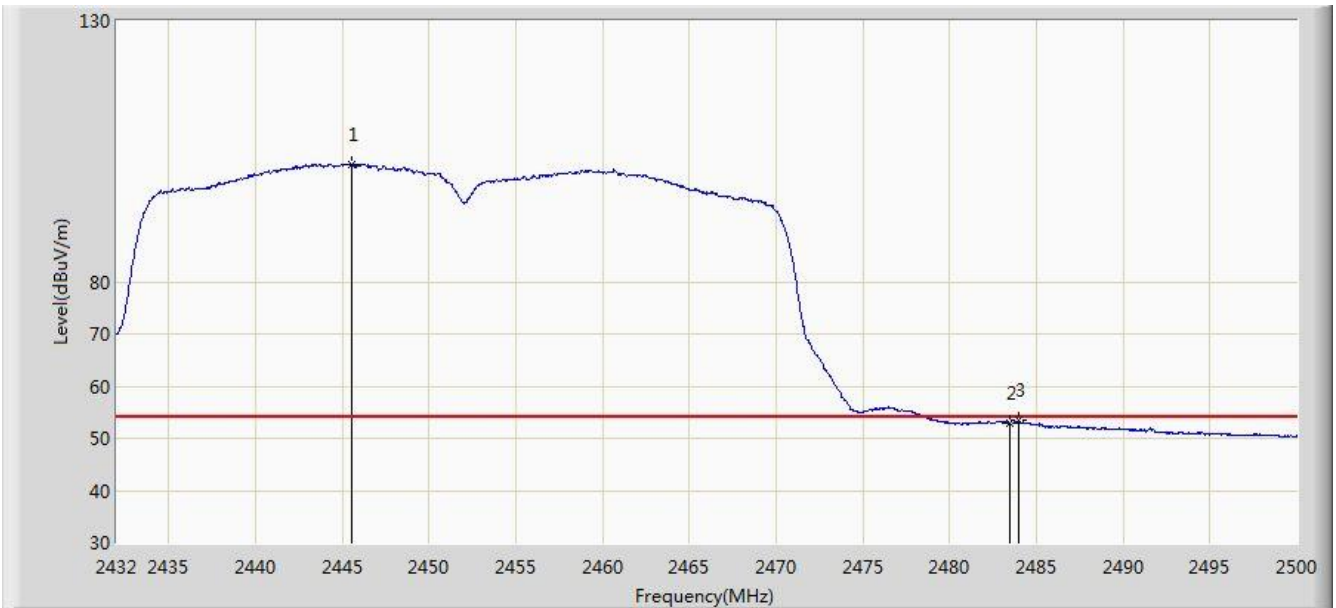

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2445.532        | 102.600                | 70.113               | N/A             | N/A            | 32.487      | AV   |
| 2  |      |      | 2483.500        | 53.026                 | 20.445               | -0.974          | 54.000         | 32.580      | AV   |
| 3  |      |      | 2483.986        | 53.375                 | 20.793               | -0.625          | 54.000         | 32.582      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)