

HI-603X



Easy Manual



HI-603X is a multi-functional and cost-efficient communication platform ideal for all AVL applications. It integrates most recent high sensitivity GPS chipset and quad-band (850/900/1800/1900) GSM communication module with powerful microcontroller into a compact/ lightweight size.

HI-603X is secured in a solid enclosure for simple installation without sweat and hassle. Nevertheless, not only it provides user with real time GPS location and accurate vehicle status all the time on server, but also it allows user to command vehicle remotely by one-click on computer. In a word, HI-603X accomplishes advanced implementation of convenient fleet management, enhanced vehicle safety, simultaneous emergency response, and merchandise/ package transportation, etc... Unlimited advantages are available with HI-603X extensive applications.

Quad band 850/900/1800/1900 MHz GSM system External SiRF Star III high performance GPS receiver External GSM active antennas Advanced communication via SMS/TCP/UDP/HTTP

Program and control the tracker from the OTA (Over the Air) web tracking platform and also USB configurations.

Build in motion sensor for power saving.

Support emergency/ over speed/ motion/ power lost alarm.

Real time location report on preferred interval and vehicle status monitoring.

Premium functions: Fast GPS Fixed/ A-GPS/ Geo-Fencing/ Hands free Kit/

Anti-Theft/ Data Logger function - 30,000 records or more.

Low battery alarm and battery voltage status.

Optional SOS button.

Minimum GPRS sending interval 5~10 seconds and interval adjustable.

HI-603X Characteristics

Items	Specifications
Power Supply	DC +9V – +28V
Backup Battery	550mAh
Normal power consumption	85mA/h
Dimension	116mm x 55mm x 24mm
Operating temperature	–20℃ to 55℃
Humidity	5% to 95% Non-condensing
Frequency	GSM 900/1800/1900Mhz
GPS Chipset	latest GPS SIRF–Star III chipset
GPS Sensitivity	–159Db
GPS Frequency	L1,1575.42 MHz
C/A Code	1.023MHz chip rate
Channels	20 channel all-in-view tracking
Position Accuracy	10 meters, 2D RMS
Velocity Accuracy	0.1 m/s
Time Accuracy	1 us synchronized to GPS time
Default datum	WGS–84
Reacquisition	0.1 sec. , average
Hot start	1 sec. , average
Warm start	38sec. , average
Cold start	42 sec. , average
Altitude Limit	18,000 meters (60,000 feet) max.
Velocity Limit	515 meters / second (1000 knots) max
Interface	One input and one output

Main unit overview



1. GSM antenna plug
2. SIM card holder
3. Transmission status
4. GSM signal status
5. Power status
6. GPS receiver plug



1. 12V~24V cigarette lighter power in
2. Connected to tapping microphone
3. Mini USB connector for set up
4. Connected to vehicle control wirings
5. Connected to the HI-403BT Bluetooth box

Dimensions



LED indicator



transmission status	transmission: Stay on
GSM signal status	GSM stand by: Off 3 seconds / On 75 micro seconds Searching network or no SIM card: On 600 micro seconds / Off 600 micro seconds GSM network connected: Stay On
Power status	Powered: Stay on Power off: Off

Hardware and Accessories

Standard packing



- 1. HI-603X main unit**
- 2. SIM card tray**
- 3. GPS receiver**
- 4. GSM antenna**
- 5. CD**
- 6. Vehicle control wires**
- 7. Mini USB to USB set up cable**
- 8. Tapping microphone**
- 9. Relay**

Getting Started

1. Push in the yellow part with a pen to release the SIM card holder.



2. Place the local SIM card on the holder.

(Make sure to disable the SIM card pin code requirement. Do this from your mobile phone.)

Close the tray. Note the tray does not quite sit flush with the unit when closed.



3. Connect the GSM antenna and GPS receiver to HI-603X



Setting up


For the initial set up from the retail box, you will need to use the set up program from the inclusive small CD and perform the set up from your computer.

1. Connect the mini USB to the computer port.


Connect the HI 603X to the USB cable. The HI-603X will initially show all lites illuminated. See p5



2. Open the tracker set up program by double clicking on “tracker.exe”

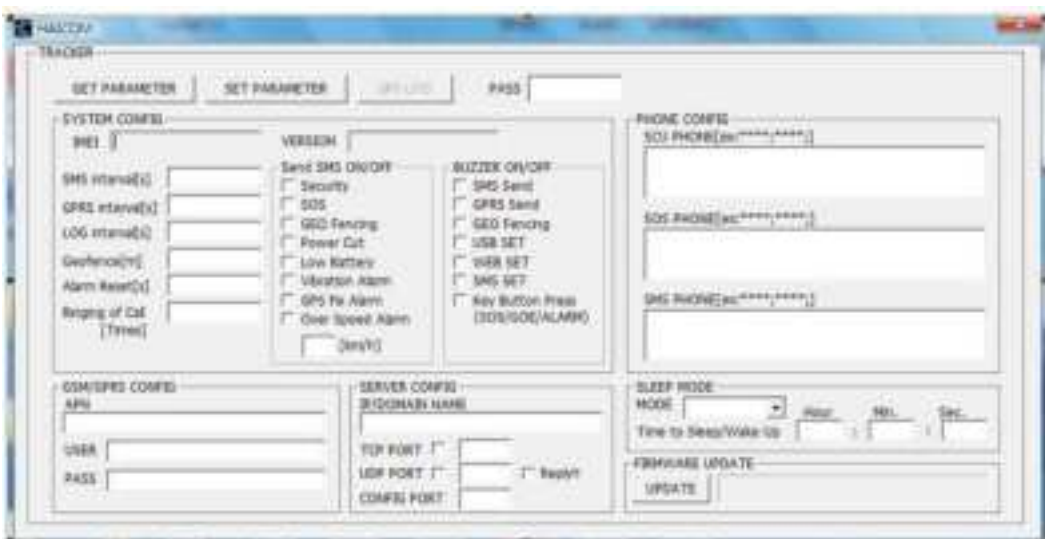

3. Click “Get Parameter”

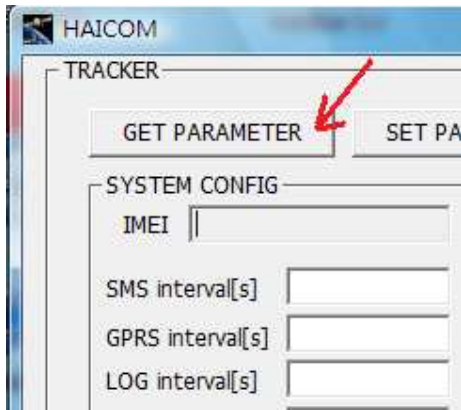

4. A message will show “Get Finish” and all the trackers current set up will appear.

Please double check with your local telecomm service provider to make sure the SIM card APN (Access Point Name) and fill in and program to the tracker.



Initial computer set up reminder:


On factory defaults, the basic set up was done.

As soon as you plug in the computer and get parameter, the computer will automatically get and show the tracker imei # on the program.

You will double check with your SIM card telecomm service provider for the correspondent APN (Access Point Name) and key in to the APN section (like the below blue block). The APN could be for instances, “ internet “, “ web. Vodafone “ or any name.

Also, please double check if the IP and port settings (the below red block) was correctly set up. (for use with Haicom GPRS web tracking: <http://www.tracking.haicom.com.tw:8090/Default.aspx>)

The above settings are the must to make the tracker to start sending data back to our server and show on the platform. The rest of selections will be set up depend on individual user's preferences.

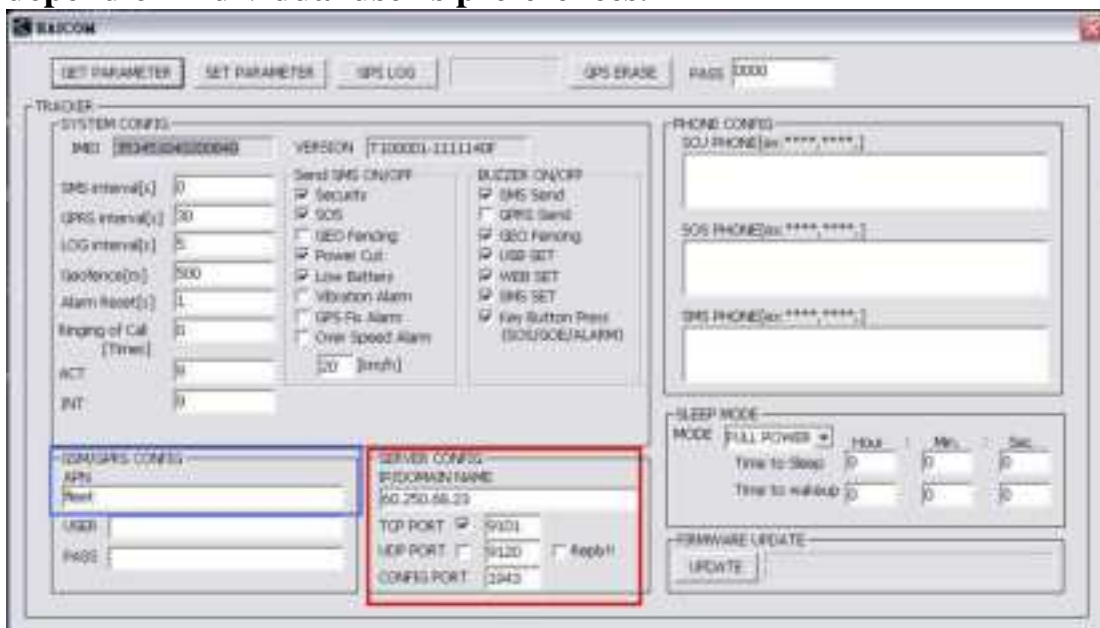

HAICOM

GET PARAMETER SET PARAMETER GPS LOG GPS ERASE PAGE 0000

TRACKER

SYSTEM CONFIG

IMEI: [384504000000000] VERSION: [T100001-1111140F]

Send SMS ON/OFF: ☒ Security ☒ SOS ☐ GEO Fencing ☒ Power Cut ☒ Low Battery ☐ Vibration Alarm ☐ GPS-Fs Alarm ☐ Over Speed Alarm

Buzzer ON/OFF: ☒ SMS Send ☐ GPRS Send ☒ GEO Fencing ☒ USSD SET ☒ SMS SET ☒ Key Button Press (SOS/SOS/ALARM)

SMS Interval(s): [0] GPRS Interval(s): [30] LOG Interval(s): [5] Location(s): [500] Alarm Reset(s): [1] Ringing of Call (Times): [1] ACT: [0] INT: [0]

COM/GPRS CONFIG

APN: []

USER: []

PAGE: []

SERVER CONFIG

SERVER NAME: []

TOP PORT: ☒ 8081

UDP PORT: ☐ 8120

CONFIG PORT: [1943]

PHONE CONFIG

SIM PHONE: []

SOS PHONE: []

SMS PHONE: []

SLEEP MODE

MODE: [FULL POWER] Hour: [0] Min: [0] Sec: [0]

Time to Sleep: [0] Time to Wakeup: [0]


FIRMWARE UPDATE

UPDATE

X series trackers

User guides for USB settings and SMS features

1. USB Settings :

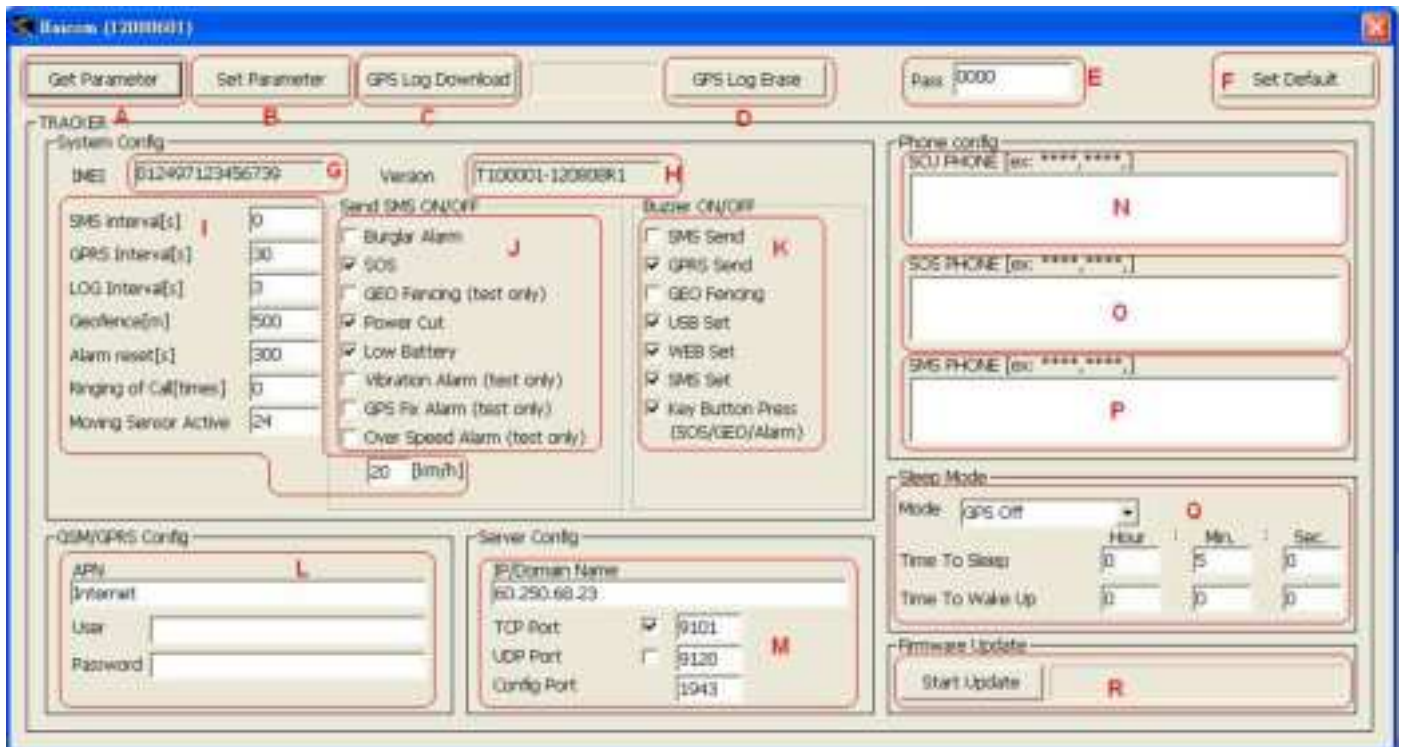

A. Press to get the tracker current settings

B. Press to save the settings changed

C. Press to download the GPS data logger records

D. Press to delete and clean out the GPS logger records. To avoid the records capacity too full (the full capacity is about 257,000 points) and slow down the download time, the records deleting is recommended after download the GPS data logger.

E. The Password is for the security purposes and the SMS commands can be used after the password verification.

F. Press to re-flash all settings back to defaults

G. The tracker's imei#

H. The current firmware version. The file name is based on the data of the generating.

I: The parameter settings for different functions:

1. The continue SMS sending time interval to certain preset phones. The setting is recommended to set more than 10 (s), 10 seconds, and set “ 0 “ means switch off this function.
2. The continue GPRS GPS coordinates sending time interval to the server. The setting is recommended to set more than 15 (s), 15 seconds, and set “ 0 “ means switch off this function.
3. The GPS data logger recording time interval. The setting is recommended to set more than 3 (s), 3 seconds, and set “ 0 “ means switch off this function.
4. The geo-fencing setting range (in diameter) The setting is recommended to set more than 500 (m), 500 meters.
5. To temporary disable all the alert functions. The setting is recommended to set less than 300 (s), 300 seconds. During the time, all the alert features will be disabled.
6. The ringing times after the voice tapping function activated.
7. The motion sensor sensitivity. The setting is recommended to set between 21 to 24, The less the number, the higher the sensibility.
8. The speed limit alert function. The alert will shown after the tracker speed higher than the speed (in kilometer per hour)

J: The on/off settings for the alert functions:

1. Turn on or off for the vehicle anti-thief alarm function
2. Turn on or off for the SOS button alarm function
3. Turn on or off for the geo fencing alarm function. The function here is only for testing and the function will be switched off once the geo fencing function activated (only one time)
4. Turn on or off the alarm when the tracker external power cut off.
5. Turn on or off the alarm when the tracker battery voltage power lower than 3.6V (battery low)
6. Turn on or off for the motion sensor alarm function. The function here is only for testing and the function will be switched off once the motion sensor function activated (only one time)
7. Turn on or off for the GPS in 3D fixed inform function. The function here is only for testing and the function will be switched off once the GPS 3D fixed function reported (only one time)
8. Turn on or off for the over speed alarm function. The function here is only for testing and the function will be switched off once the over speed function activated (only one time)

K: The settings for the tracker buzzer sound or silent:

1. Buzzer sound or silent every time when the SMS coordinates sending
2. Buzzer sound or silent every time when the GPRS coordinates sending
3. Buzzer sound or silent when the geo fencing alarm sent
4. Buzzer sound or silent when the USB set up completed
5. Buzzer sound or silent after receiving the settings from the web tracking site
6. Buzzer sound or silent after receiving the settings from the phone SMS command

7. Buzzer sound or silent when press the buttons (only available for the HI-602X and the optional car kit box)

L: Set up the APN (Access Point Name) from the SIM card telecomm service provider

M: Set up the IP/Domain address of the tracking server for the GPRS data to send to

1. Can set up either the IP or the domain name
2. Set up the server receiving data protocol and port (Set TCP if the server protocol is TCP)
3. Set up the server receiving data protocol and port (Set UDP if the server protocol is UDP)
4. Set up the two-way configuration port between the server and the tracker. User can also set as “ 0 “ to disable the GPRS function (under this mode, the SMS and the data logger functions still keep on working) User can also set as “ 1 “ to switch off both the server alarm control function and the two-way configuration function (under this mode, the GPRS coordinates sending functions still keep on working)

N: Set up the telephone numbers which will receive SMS from all the alarm functions activated and the tapping voice (except for the SOS)

O: Set up the telephone numbers which will receive SMS when the SOS alarm functions activated and the tapping voice

P: Set up the telephone numbers which will receive SMS with the continue coordinates and the tapping voice

Q: Set up the sleeping mode and the times:

1. Full power: Keep on sending coordinates none stop. Highest power consumption and no need to set up the times.
2. GPS Off: The tracker GPS function will be switched off (based on the ‘Time To Sleep’ colume time) after the tracker no moved. Under this mode, the tracker still stand by to take the commands from the phone SMS or from the web tracking set up) As soon as the tracker moved again, the GPS function will start to work again. Under this mode, the tracker power consumption will be less.
3. All Off: The tracker all functions, GPS, GSM, etc. will be switched off (based on the ‘Time To Sleep’ colume time) after the tracker no moved. Under this mode, the tracker will not be able to take any commands from the phone SMS or from the web tracking set up) As soon as the tracker moved again, all the functions will start to work again. Under this mode, the tracker power consumption will be lowest.
4. Weak Up: The tracker all functions, GPS, GSM, etc. will be switched off (based on the ‘Time To Sleep’ colume time) regardless of the tracker motion sensor moved or not. Under this mode, the tracker will not be able to take any commands from the phone SMS or from the web tracking set up) After the finish the sleep time (based on the ‘Time To Weak UP’

colume time) the tracker will switched on again to work normal. The automatic sleep and weak up will be cycled continuesly base on the settings. The mode is suitable for the condition that the user only need to know the tracker updated locations in some fix time and let the tracker go sleeping mode (switched off) to save power consumption. The 'Time To Sleep' set up is recommended to set no less than 3 minutes so that the tracker GPS have enough time to let the GPS get 3D fixed. In this way, the tracker can send the updated real time location (GPS 3D fixed location) back to the server.

R: Firmware update: After the firmware updated, delete the GPS log data in the tracker is recommended to make sure the tracker internal memory stay in complete.

Terms Explanations

System Config:

1. IMEI: Tracker imei #
2. Version: Tracker firmware version
3. SMS intervals[s]: Interval of tracker send real time position with Google map hyperlink via SMS



4. GPRS interval[s]: Interval of tracker send real time position to the server via GPRS
5. LOG interval[s]: Interval of tracker data logging
6. Geofence [m]: Send warning when tracker out of the Geofencing range
7. Alarm Reset[s]: Time of all the security functions temporary disabled
8. Ringing of Call[Times]: Tracker ringing time when user call

The example to send SMS command to the tracker:

Send: #0000,10



You will receive this message:



Click the hyperlink to get the real time position



Longitude
Latitude

The example to send SMS command to the tracker:

Send: #0000,155



You will receive this message:



Tracker
Telephone#

2nd. set send back
telephone #

1st. set send back
telephone #

SMS Command for X series



Code	Format	Function
100	#0000,100	Request all setting values back
151	#0000,151,0000000000,0000000000,0000000000	Set Security Phone Number.(10 Max.)
152	#0000,152,0000000000,0000000000,0000000000	Set SOS Phone Number (10Max.)
153	#0000,153,0000000000,0000000000,0000000000	Set SMS Phone Number (10 Max.)
154	#0000,154	Get Security Phone Setting
155	#0000,155	Get SOS Phone Setting
156	#0000,156	Get SMS Phone Setting
200	#0000,200,APN,USER,PASS	Set APN
201	#0000,201	Get APN Setting
210	#0000,210,IP,TCP port,UDP port,config port,protocol select #0000,210,60.250.68.23,9101,9120,1943,0	Set IP and Port
211	#0000,211	Get IP and Port Value
250	#0000,250,SMS,GPRS,LOG,Geo,Alarm,Ring,Speed,Sensor #0000,250,0,30,0,500,60,0,20,10	Set Interval and Parameter
251	#0000,251	Get Interval Setting
300	#0000,300,Buglar,SOS,GEO,PWCUT,LBAT,Vir,GPS,OPA #0000,300,0,1,0,1,1,0,0,0	Set Event
301	#0000,301	Get Event Setting
350	#0000,350,SMS_Send,GPRS,GEO,USB,WEB,SMS_Set,KEY #0000,350,0,0,0,1,1,1,1	Set Buzzer
351	#0000,351	Get Buzzer Setting
400	#0000,400,Mode,Hour1,Minute1,Second1,Hour2,Minute2,Second2 #0000,400,1,0,5,0,0,0,0	Set Power Saving Mode
401	#0000,401	Get Power Saving Mode Setting
01	#0000,01,Pass,Pass #0000,01,0000,0000	Set Password
10	#0000,10	Get GPS Data
11	#0000,11,Phone Number	Talking Permitted
12	#0000,12,1	Relay #1 On/Off
13	#0000,13,1	Relay #2 On/Off
14	#0000,14	Tracker Reset
15	#0000,15	Inform Tracker send TX000 to Server
16	#0000,16,1	Set GEO Fencing Activate
17	#0000,17,1	Set GPS Fixed Alarm Activate
18	#0000,18,1	Set Moving Alarm Activate
19	#0000,19,1	Set Over Speed Alarm Activate

EXAMPLE : #0000,210,60.250.68.23,9101,9120,1943,0

SMS initial code

0000 password (default is 0000)

210 Initial command code

60.250.68.23,9101,9120,1943,0 Varies parameters

Fill in “ * “ between the comma when the above parameters unchanged.

Fill in nothing between the comma to empty the data (originally there are some parameters in between, such as the APN, USER and the PASS)

Different parameters will divided by comma: “ , “

Explanations to the initial command code:

151 (Set Security Phone Number)

Fill in maximum 10 phone numbers

152 (Set SOS Phone Number)

Fill in maximum 10 phone numbers

153 (Set SMS Phone Number)

Fill in maximum 10 phone numbers

200 (Set APN)

APN : GPRS Access Point Name of the SIM card (check with your telecomm service provider for the exact APN)

USER : APN user name

PASS : APN password

210 (Set IP and Port)

IP : The server IP address which the tracker will send to (Domain name also OK)

TCP port : The destinate server TCP port

UDP port : The destinate server UDP port

Config port : Set up the two-way configuration port between the server and the tracker. User can also set as “ 0 “ to disable the two way configuration function.

Protocol select : Select the communication protocol between the tracker and server

0→ TCP 、 1→UDP

250 (Set Interval and Parameter)

SMS: The continue SMS sending time interval to certain preset phones. The setting is recommended to set more than 10 (s), 10 seconds.

GPRS: The continue GPRS GPS coordinates sending time interval to the server. The setting is recommended to set more than 15 (s), 15 seconds.

LOG: The GPS data logger recording time interval. The setting is recommended to set more than 3 (s), 3 seconds.

Geo: The geo-fencing setting range (in diameter) The setting is recommended to set more than 500 (m), 500 meters.

Alarm: To temporary disable all the alert functions. The setting is recommended to set less than 300 (s), 300 seconds. During the time, all the alert features will be disabled.

Ring: The ringing times after the voice tapping function activated.

Speed: The speed limit alert function. The alert will shown after the tracker speed higher than the speed (in Km/h kilometer per hour)

Sensor: The motion sensor sensitivity. The setting is recommended to set between 21 to 24, the less the number, the higher the sensibility.

300 (Set Event)

Buglar: Enable or disable (1 → enable, 0 → disable) to send SMS when the vehicle anti-thief alarm function activated

SOS: Enable or disable (1 → enable, 0 → disable) to send SMS when the SOS button pressed

GEO: Enable or disable (1 → enable, 0 → disable) to send SMS when the geofence triggered (for test only)

PWCUT: Enable or disable (1 → enable, 0 → disable) to send SMS when the tracker external power source was cut.

LBAT: Enable or disable (1 → enable, 0 → disable) to send SMS when the tracker internal battery low (less than 3.6V)

Vir: Enable or disable (1 → enable, 0 → disable) to send SMS when the tracker moved (for test only)

GPS: Enable or disable (1 → enable, 0 → disable) to send SMS when the GPS fixed (for test only)

OPA: Enable or disable (1 → enable, 0 → disable) to send SMS when the car speed over setting (for test only)

350 (Set Buzzer)

SMS Send: Buzzer sound or silent (1 → enable, 0 → disable) every time when the SMS coordinates sending

GPRS: Buzzer sound or silent (1 → enable, 0 → disable) every time when the GPRS coordinates sending

GEO: Buzzer sound or silent (1 → enable, 0 → disable) when the geo fencing alarm sent

USB: Buzzer sound or silent (1 → enable, 0 → disable) when the USB set up completed

WEB: Buzzer sound or silent (1 → enable, 0 → disable) after receiving the settings from

the web tracking site

SMS Set: Buzzer sound or silent (1 → enable, 0 → disable) after receiving the settings from the phone SMS command

KEY: Buzzer sound or silent (1 → enable, 0 → disable) when press the buttons (only available for the HI-602X and HI-603)

400 (Set Power Saving Mode)

Mode : Set up the sleeping mode: 0 → Full power · 1 → GPS off · 2 → all off · 3 → fixed on/off time

Hour1 : Time setting, hours

Minute1 : Time setting, minutes

Second1 : Time setting, second (please consult the above USB setting guides “Time To Sleep” Q)

Hour2 : Time setting, hours

Minute2 : Time setting, minutes

Second2 : Time setting, second (please consult the above USB setting guides “Time To Weak Up” Q)

01 (Set Password)

Pass : Set up the new password (needed to be 4 digits)

Pass : Key in once again the new password (the set up can only success when this 4 digits are identical to the above 4 digits)

10 (Get GPS Data)

Request the current GPS coordinates from the tracker

11 (Talking Permitted)

Allow some specific phone to do the phone tapping and the request will only available one time and user will set another command when once again need such function. For instances, the telephone number, 0937777777, was not fill in the list of the preset telephone numbers (like, the SCU, SOS, SMS from the USB column)

When need to do the tapping, send SMS command #0000,11, 0937777777 to the tracker and the user can use the phone 0937777777 to do the tapping once.

12 (Relay #1 On/Off)

1 → cut off relay · 0 → recover the relay to normal

13 (Relay #2 On/Off)

1 → cut off relay · 0 → recover the relay to normal

14 (System Reset)

Request the tracker re-flesh all settings

15 (Inform Tracker send TX000 to Server)

Request the tracker and the server to perform the two ways synchronize communications (In order to let the tracker and the server to do the two way settings and information exchanges, they must stay in connection status. But, under some circumstances, the tracker is not connected to the server, such as under GPS off mode (sleeping mode) although the GSM is active but the tracker do not stay connect with the server. With this command, the tracker will immediately take the server command and react. If not, the tracker will also proactively connect to the server within 3 minutes)

16 (Set GEO Fencing Activate)

Activate GeoFencing alarm send back , 1 → enable , 0 → disable The function only available for one time and will set up once again when need it.

17 (Set GPS Fix Alarm Activate)

Activate GPS in 3D fixed message send back , 1 → enable , 0 → disable The function only available for one time and will set up once again when need it.

18 (Set Moving Alarm Activate)

Activate motion sensor alarm send back , 1 → enable , 0 → disable The function only available for one time and will set up once again when need it.

19 (Set Over Speed Alarm Activate)

Activate over speed alarm send back , 1 → enable , 0 → disable The function only available for one time and will set up once again when need it.

The tracker will automatically send SMS message notice that the above settings and control executed successfully.



SMS GPS coordinates send back guides:

EXAMPLE:

\$T120808R1,GPS,A,N,24°59'58.26,E,121°29'21.65,000030.0,182.57,120808,074222*(012497123456789),<http://maps.google.com/maps?q=24.999518,121.489352>

Explanations:

\$	SMS initial code
T120808R1	Firmware version
GPS	SMS message type (please consult the below SMS message type list)
A	GPS fixed status (A in 3D fixed ,V not fixed yet)
N,24°59'58.26,E,121°29'21.65	Coordinates (Format: degree" minute' second)
000030.0	Speed (Sea mile)
182.57	Direction angle (degree)
120808	GPS time (UTC)
074222	GPS time (UTC)
012497000242432	Tracker imei#
http://maps.google.com/maps?q=24.999518,121.489352	The hyperlink URL to the map Click the link to see the map

SMS message type:


GPS	Upon request with command 10, the tracker will keep on sending (SMS interval)
the	GPS coordinates back via SMS
BUR	Burglar Alarm activated
BATLOW	Battery power low (less then 3.6V) alarm
POWCUT	Tracker external power cut off alarm
SOS	The SOS button press
GPS_OK	GPS 3Dfixed report
GEO	Geo Fencing activated
VIA	Vibration Alarm activated
OSA	Over Speed Alarm activated

* Update new firmware


1. Decompress the files.
2. Run the TRACKER program

名稱	大小	類型
Smpl_HID	75 KB	BIN 檔案
Smpl_HID.md5	1 KB	MD5 檔案
TRACKER	1,880 KB	應用程式


3. Plug the tracker to the computer USB port
4. Press the GET PARAMETER and see the current settings
5. Press the UPDATE
6. Open the firmware (2 files)

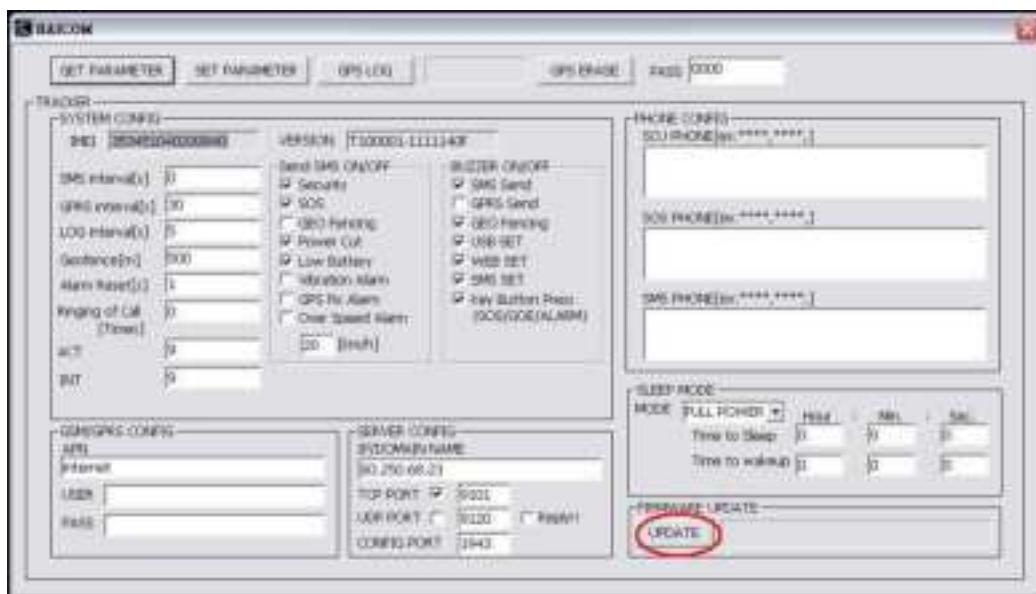

7. Show the below message and click OK

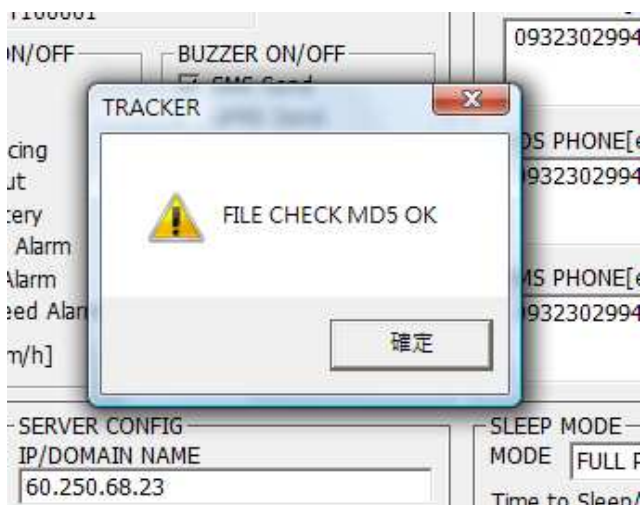

8. The firmware start loading

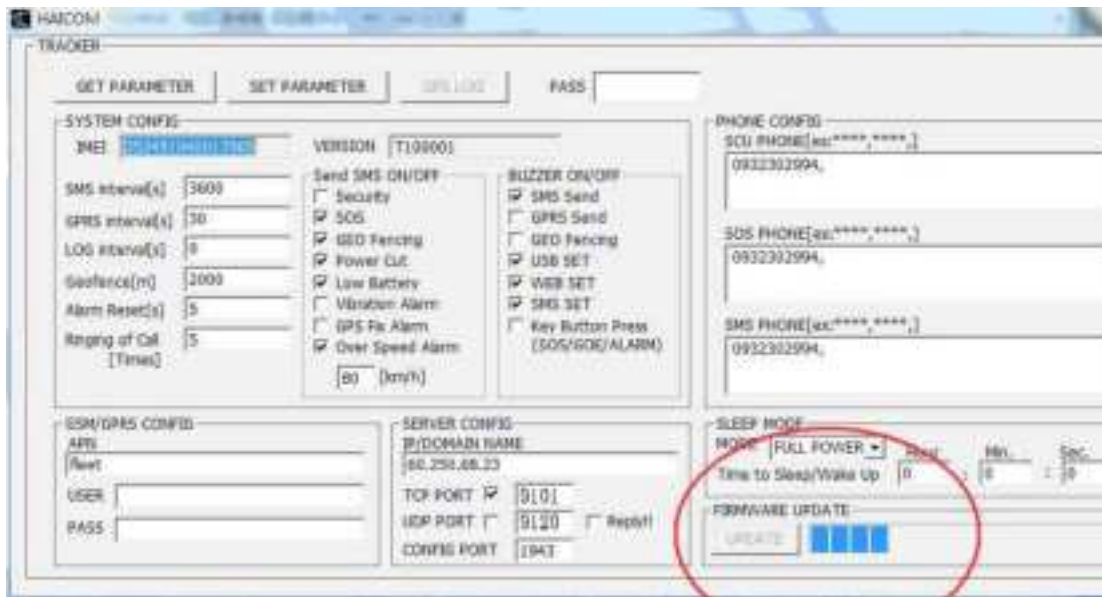


9. The below message shown and press OK



1. Initial registration from the GPRS web tracking platform: <http://www.tracking.haicom.com.tw:8090/>




2. New user; please register before login.

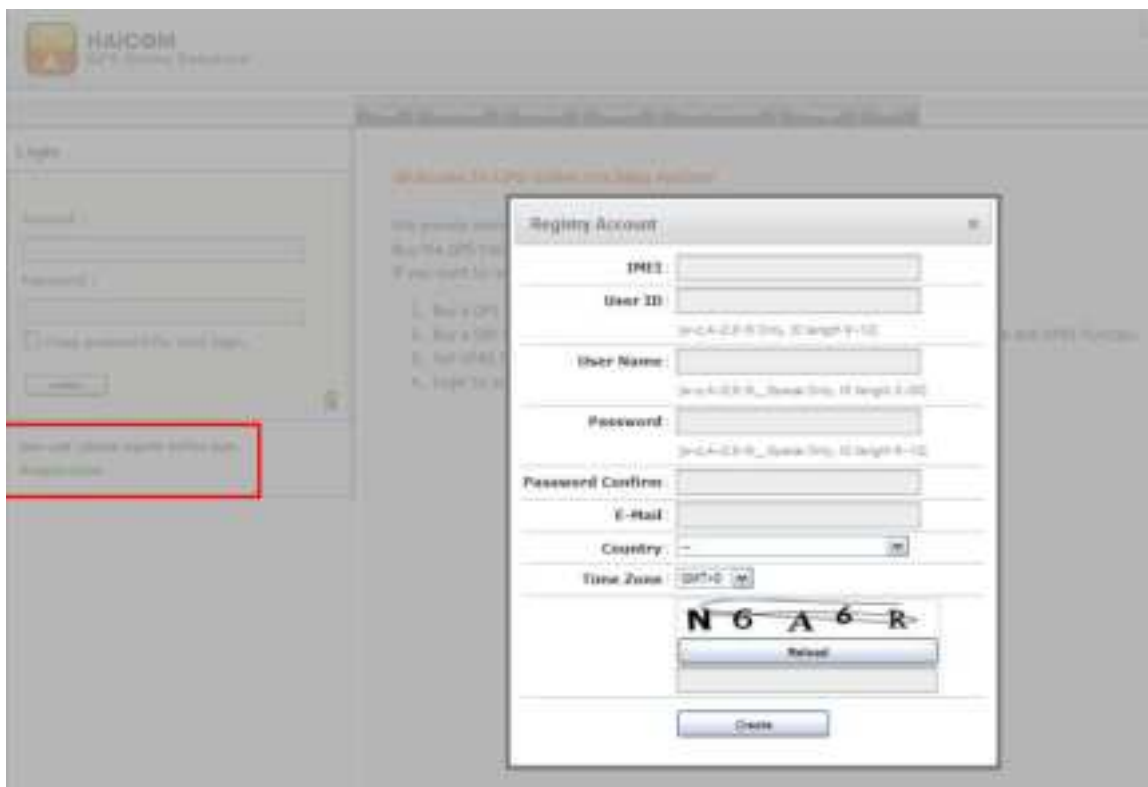

3. The tracker imei # is shown on the bottom of the sticker:




4. After login, select the “ Manage ” for Add New Tracker

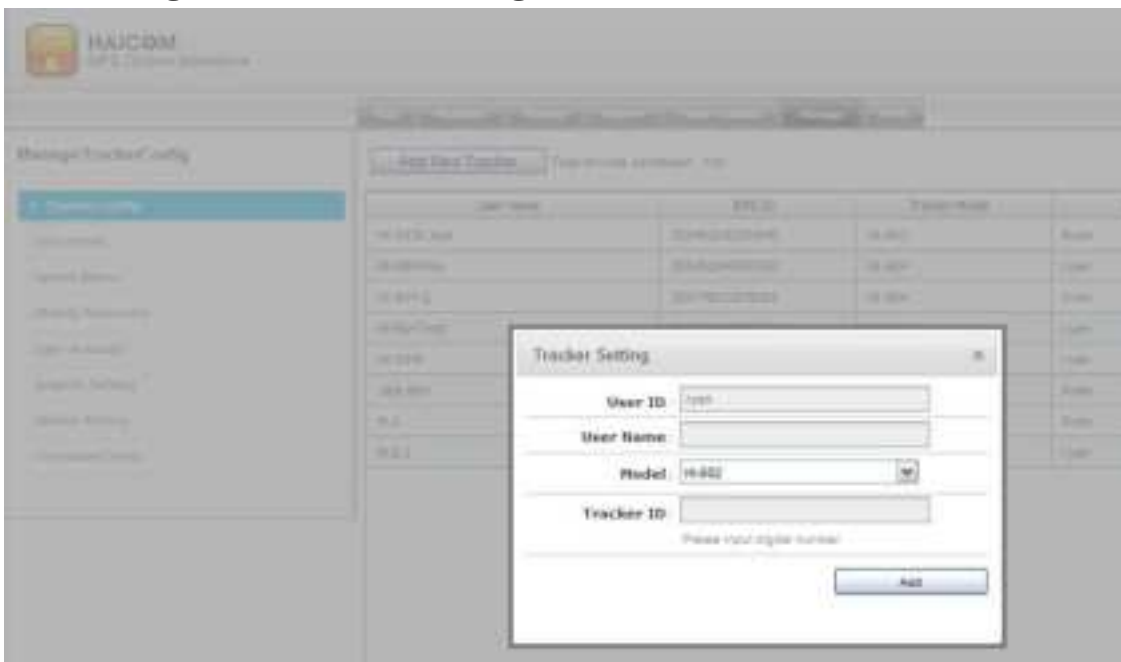


*** Program tracker from Haicom GPRS web tracking web site**

- 1. Make sure the tracker connected to the GSM network and start sending back the data**
- 2. On the Manage/Device Settings section, select the tracker and press Load**

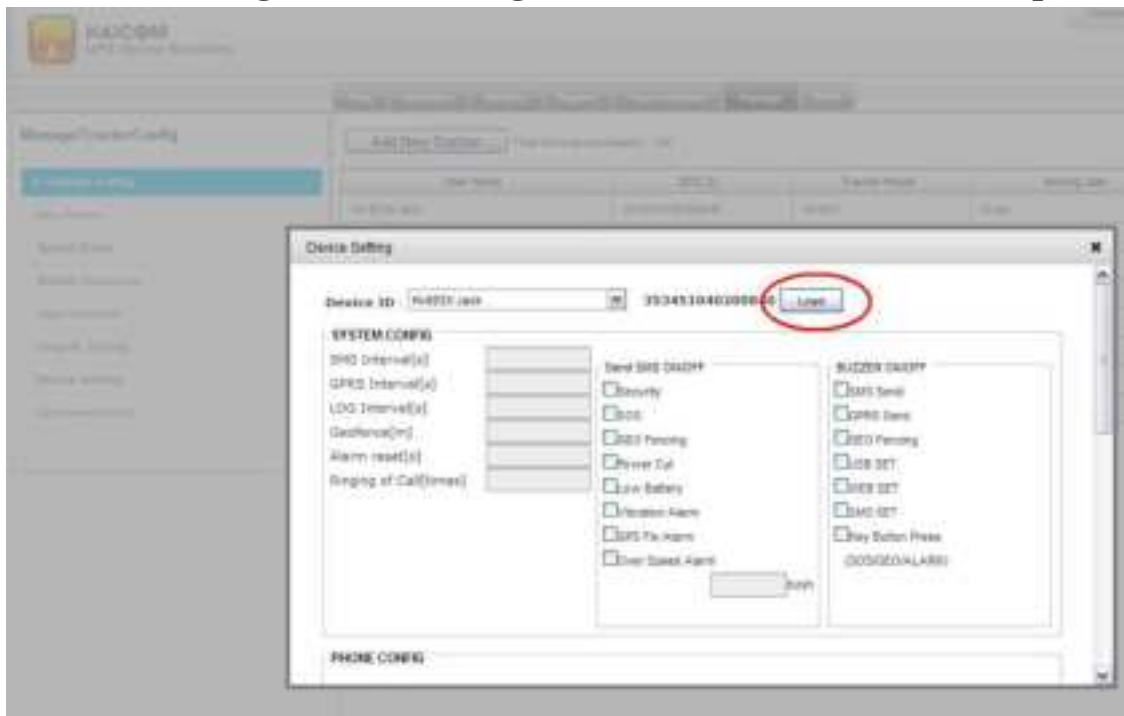


- 3. Change the prefer settings**

4. Press Setup and will show: Device information update successfully

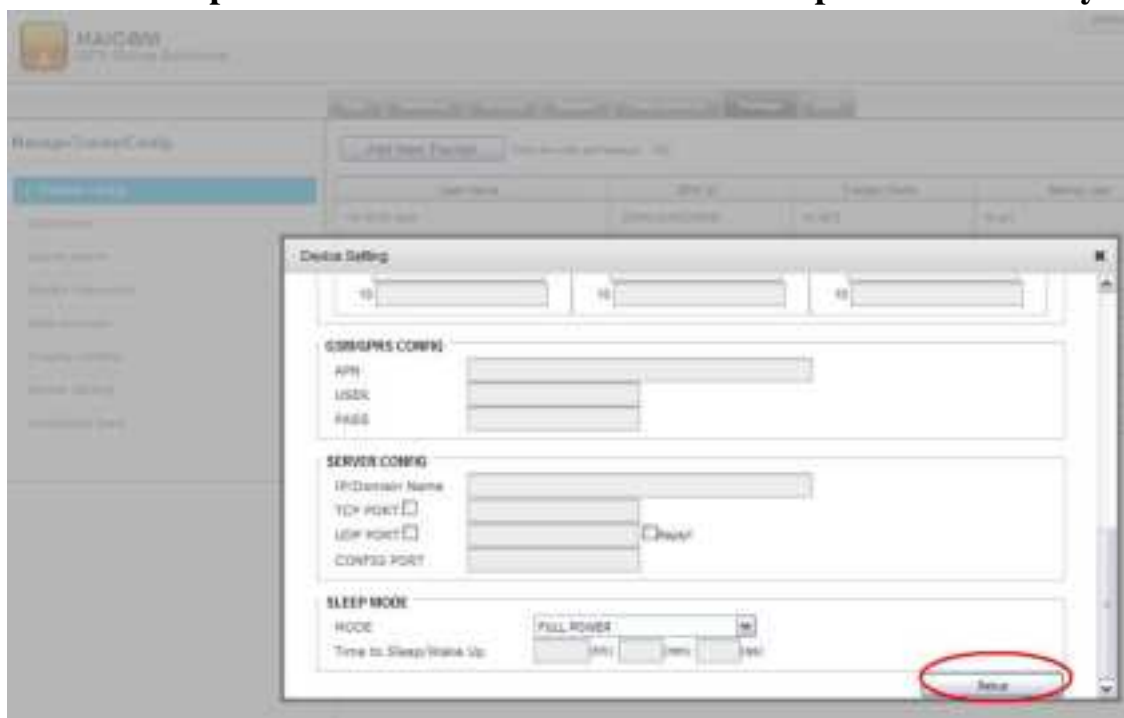

How to generate the detail report print out with address

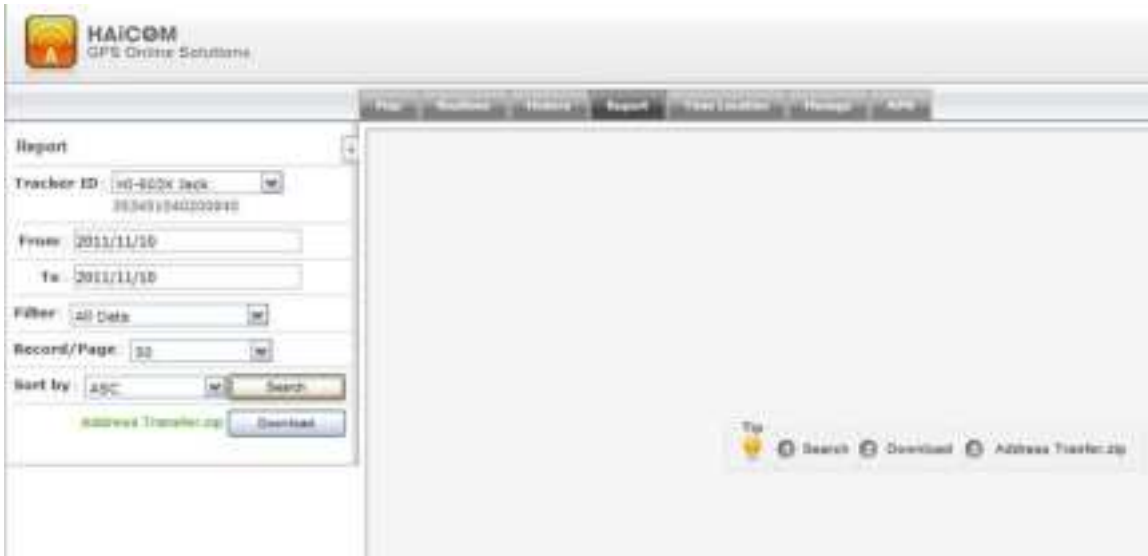


The screenshot shows the HAICOM GPS Online Software interface. The top navigation bar includes links for Home, Software, History, Report, View Location, Settings, and Help. The 'Report' section is active, displaying a form with the following fields:

- Tracker ID:** A dropdown menu showing 'HG-800N Jack' and a unique ID '383481040100040'.
- From:** A date field set to '2011/11/10'.
- To:** A date field set to '2011/11/10'.
- Filter:** A dropdown menu set to 'All Data'.
- Record/Page:** A dropdown menu set to '20'.
- Sort by:** A dropdown menu set to 'ASC'.

Below the form, there is a 'Search' button and a 'Download' button. A tip box at the bottom right of the form area contains the text: 'Tip: Search Download Address Transfer.zip'.

1. Select the preferred from and to date and click “ Search “
2. Click “ Download “ and the csv file will be saved as Excel file
3. Click “ Address Transfer.zip “ for the transfer program

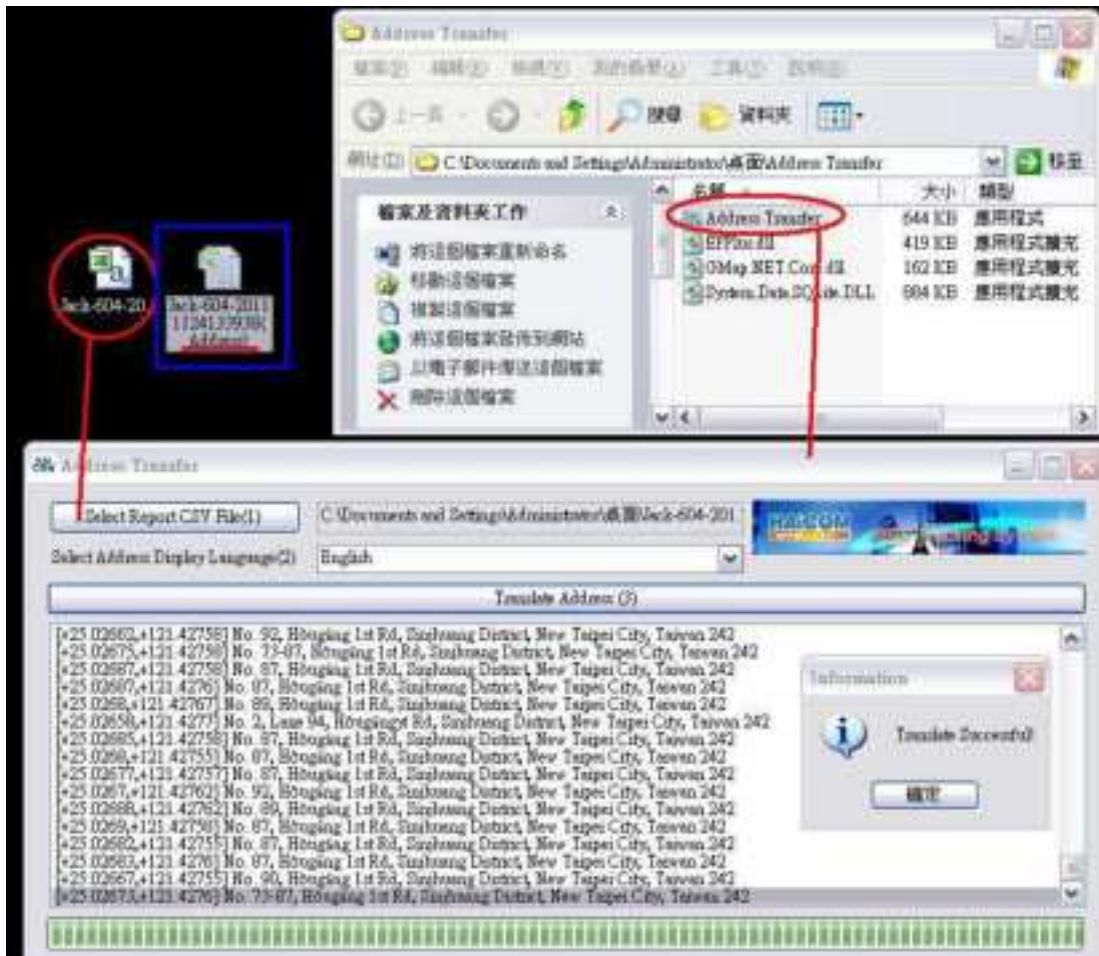

1. Click “ Address Transfer program icon to run the program “
2. Select the csv Excel file
3. Click “ Transfer Address (3) “
4. After the translate program running, the “ Translate successful ! “ message will appeared. In the mean time, there will extra Excel file with (Address) saved on your desktop. Open the file, you will see the retail reports, with Date/time/long./lat./detail address data like below example shown.

The example of the detail report printout

#	id	DATE	TIME	ADDRESS	APPRO	DISTANCE	GRADE	PROJECT	UNITED	INSTALLED	COMMENT
1	1	2010/01/01	00:00:00	Haicom generated data for the first pulse, a vertical order for	OK	200	0.00	HAICOM-01	10000000	10000000	
2	2	2010/01/01	00:00:01	Haicom generated data for the second pulse, a vertical order for	OK	200	0.00	HAICOM-02	10000001	10000001	
3	3	2010/01/01	00:00:02	Haicom generated data for the third pulse, a vertical order for	OK	200	0.00	HAICOM-03	10000002	10000002	
4	4	2010/01/01	00:00:03	Haicom generated data for the fourth pulse, a vertical order for	OK	200	0.00	HAICOM-04	10000003	10000003	
5	5	2010/01/01	00:00:04	Haicom generated data for the fifth pulse, a vertical order for	OK	200	0.00	HAICOM-05	10000004	10000004	
6	6	2010/01/01	00:00:05	Haicom generated data for the sixth pulse, a vertical order for	OK	200	0.00	HAICOM-06	10000005	10000005	
7	7	2010/01/01	00:00:06	Haicom generated data for the seventh pulse, a vertical order for	OK	200	0.00	HAICOM-07	10000006	10000006	
8	8	2010/01/01	00:00:07	Haicom generated data for the eighth pulse, a vertical order for	OK	200	0.00	HAICOM-08	10000007	10000007	
9	9	2010/01/01	00:00:08	Haicom generated data for the ninth pulse, a vertical order for	OK	200	0.00	HAICOM-09	10000008	10000008	
10	10	2010/01/01	00:00:09	Haicom generated data for the tenth pulse, a vertical order for	OK	200	0.00	HAICOM-10	10000009	10000009	
11	11	2010/01/01	00:00:10	Haicom generated data for the eleventh pulse, a vertical order for	OK	200	0.00	HAICOM-11	10000010	10000010	
12	12	2010/01/01	00:00:11	Haicom generated data for the twelfth pulse, a vertical order for	OK	200	0.00	HAICOM-12	10000011	10000011	
13	13	2010/01/01	00:00:12	Haicom generated data for the thirteenth pulse, a vertical order for	OK	200	0.00	HAICOM-13	10000012	10000012	
14	14	2010/01/01	00:00:13	Haicom generated data for the fourteenth pulse, a vertical order for	OK	200	0.00	HAICOM-14	10000013	10000013	
15	15	2010/01/01	00:00:14	Haicom generated data for the fifteenth pulse, a vertical order for	OK	200	0.00	HAICOM-15	10000014	10000014	
16	16	2010/01/01	00:00:15	Haicom generated data for the sixteenth pulse, a vertical order for	OK	200	0.00	HAICOM-16	10000015	10000015	
17	17	2010/01/01	00:00:16	Haicom generated data for the seventeenth pulse, a vertical order for	OK	200	0.00	HAICOM-17	10000016	10000016	
18	18	2010/01/01	00:00:17	Haicom generated data for the eighteenth pulse, a vertical order for	OK	200	0.00	HAICOM-18	10000017	10000017	
19	19	2010/01/01	00:00:18	Haicom generated data for the nineteenth pulse, a vertical order for	OK	200	0.00	HAICOM-19	10000018	10000018	
20	20	2010/01/01	00:00:19	Haicom generated data for the twentieth pulse, a vertical order for	OK	200	0.00	HAICOM-20	10000019	10000019	
21	21	2010/01/01	00:00:20	Haicom generated data for the twenty-first pulse, a vertical order for	OK	200	0.00	HAICOM-21	10000020	10000020	
22	22	2010/01/01	00:00:21	Haicom generated data for the twenty-second pulse, a vertical order for	OK	200	0.00	HAICOM-22	10000021	10000021	
23	23	2010/01/01	00:00:22	Haicom generated data for the twenty-third pulse, a vertical order for	OK	200	0.00	HAICOM-23	10000022	10000022	
24	24	2010/01/01	00:00:23	Haicom generated data for the twenty-fourth pulse, a vertical order for	OK	200	0.00	HAICOM-24	10000023	10000023	
25	25	2010/01/01	00:00:24	Haicom generated data for the twenty-fifth pulse, a vertical order for	OK	200	0.00	HAICOM-25	10000024	10000024	
26	26	2010/01/01	00:00:25	Haicom generated data for the twenty-sixth pulse, a vertical order for	OK	200	0.00	HAICOM-26	10000025	10000025	
27	27	2010/01/01	00:00:26	Haicom generated data for the twenty-seventh pulse, a vertical order for	OK	200	0.00	HAICOM-27	10000026	10000026	
28	28	2010/01/01	00:00:27	Haicom generated data for the twenty-eighth pulse, a vertical order for	OK	200	0.00	HAICOM-28	10000027	10000027	
29	29	2010/01/01	00:00:28	Haicom generated data for the twenty-ninth pulse, a vertical order for	OK	200	0.00	HAICOM-29	10000028	10000028	
30	30	2010/01/01	00:00:29	Haicom generated data for the thirtieth pulse, a vertical order for	OK	200	0.00	HAICOM-30	10000029	10000029	

HI-603X installation video guides

How to connect and install Haicom Tracker


http://www.youtube.com/watch?v=9ytNRmu6TMQ&feature=channel_video_title

How to connect and install HI-603X

http://www.youtube.com/watch?v=yVAqvhHLzvU&feature=channel_video_title

How to calculate the historical total travel distance:

1. Click the preferred start point
2. Click the start point icon

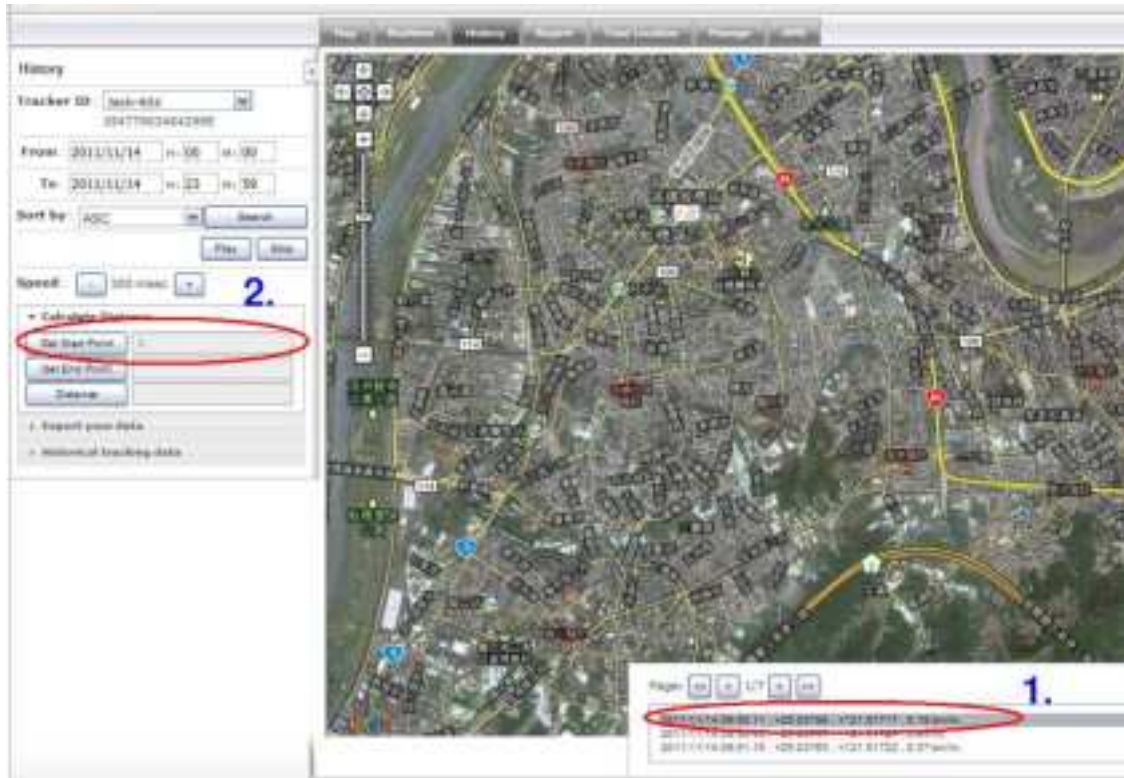

3. Click the preferred end point

4. Click the end point icon




5. Click the Distance icon to get the total traveled distance



How to send command from the GPRS tracking platform:

1. Click Manage -> Command Send:

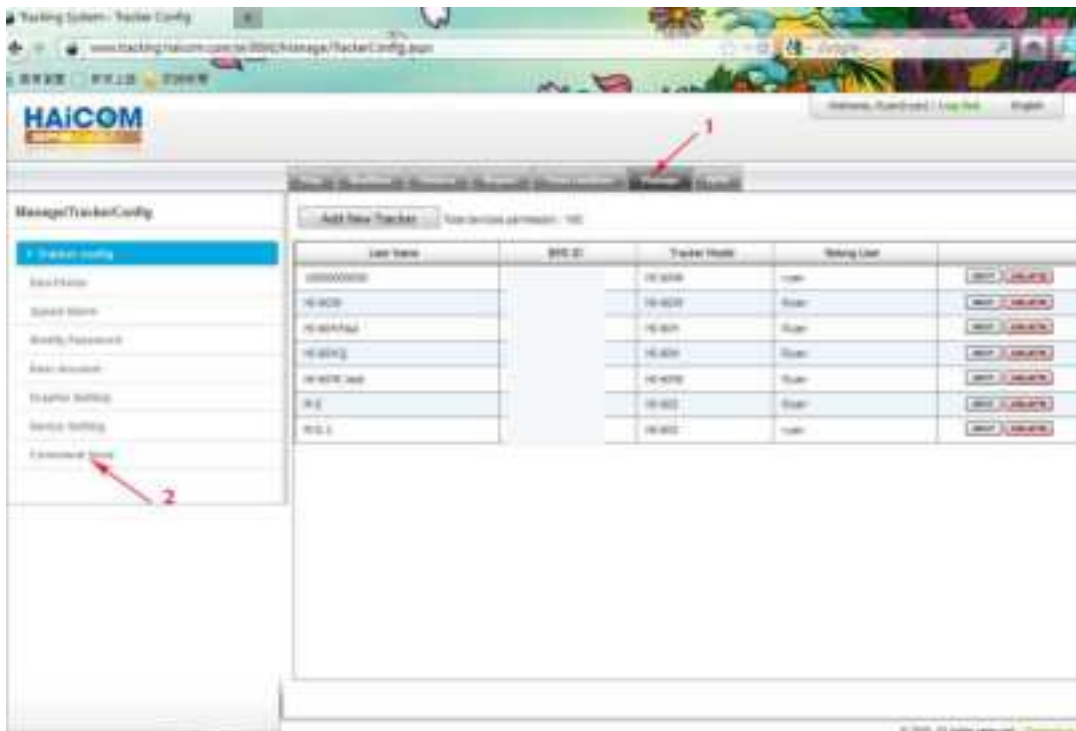


2. Click to send commands from the platform:

Status

Open (0) means the relay is stay connection.

To cut the relay (cut off the ignition, oil pump, power, etc.), select Close (1)

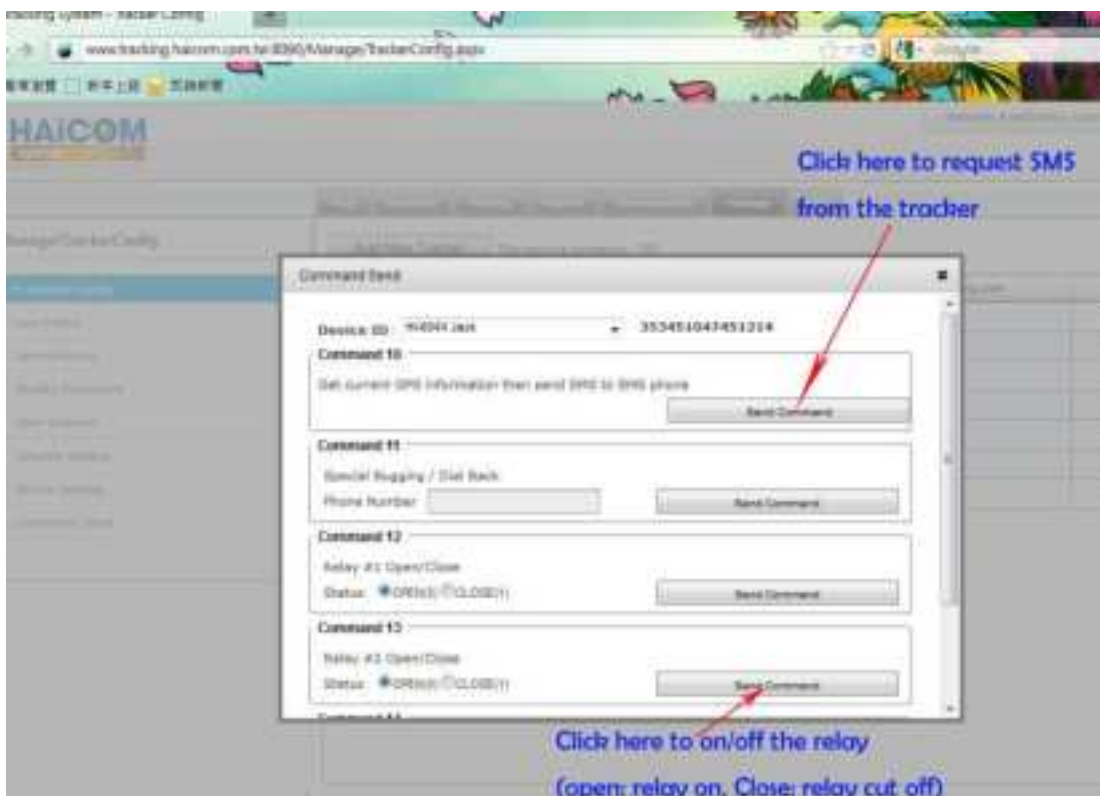

The screenshot displays the HAICOM Command Send window. It features three sections for Command #3, Command #4, and Command #5. Each section includes a 'Send' button and a 'Send Status' button. Below these sections is a 'Command Queue' table with columns for 'Seq', 'Date Time', 'TX ID', 'TX', 'Send Flag', and 'Send Time'.

Seq	Date Time	TX ID	TX	Send Flag	Send Time
yes	2012-01-17 15:39:18	TX00000000000000000000000000000000	TX00000000000000000000000000000000	YES	2012-01-17 15:39:18
yes	2012-01-17 15:39:18	TX00000000000000000000000000000000	TX00000000000000000000000000000000	NO	2012-01-17 15:39:18
yes	2012-01-17 15:39:18	TX00000000000000000000000000000000	TX00000000000000000000000000000000	YES	2012-01-17 15:39:18

Annotations in the image include:


- A red arrow pointing to the 'Send' button in the Command #5 section, labeled "Click here to see the commands sending status".
- A red arrow pointing to the 'Send Flag' column in the Command Queue table, labeled "YES: the sending successfully" and "NO: the sending still pending".

Set up GeoFencing function steps:


Basically, there are two ways to set up the geo fence function and both ways are independent to each other. For instance, if you set up the geo fence alarm on the map radius, the trigger will only report to the tracking site. If you set up the geo fence function from the Manage -> Device Setting, from the SMS or from the computer set up program, it will only report the alarm to the phone (and not to the tracking site)

1. Set up geo fence radius on the tracking site:

1. Move the mouse cursor to the preferred geo fencing point and double click it.
The red bubble will appeared:

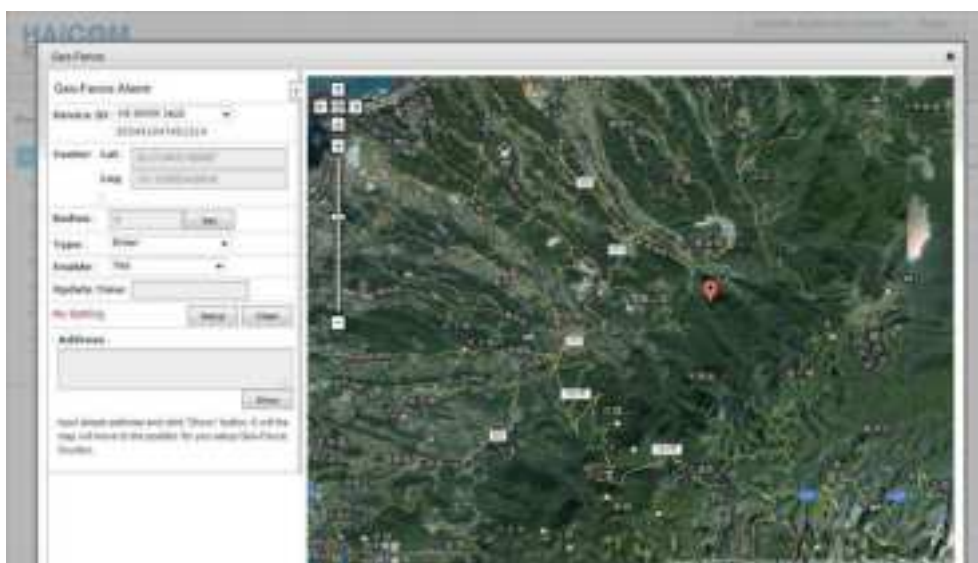


2. Key in the preferred geo fencing radius range (in km) and click Set.
After the clicking, the blue circle will appeared on the map.
User can select to get the geo fencing alarm when the tracker enter or leave the radius range.

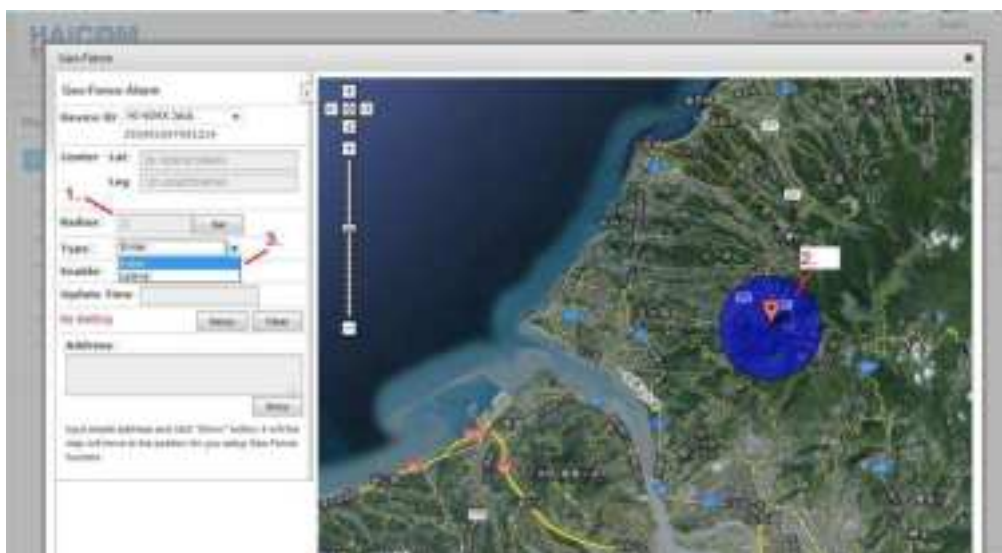

3. Make sure click “ Yes “ on the Enable section so that the geo fencing function will work.


Then, click Setup to complete the procedures. In the mean time, the Update Time will show the time that you set up and show Update Successful on the side:

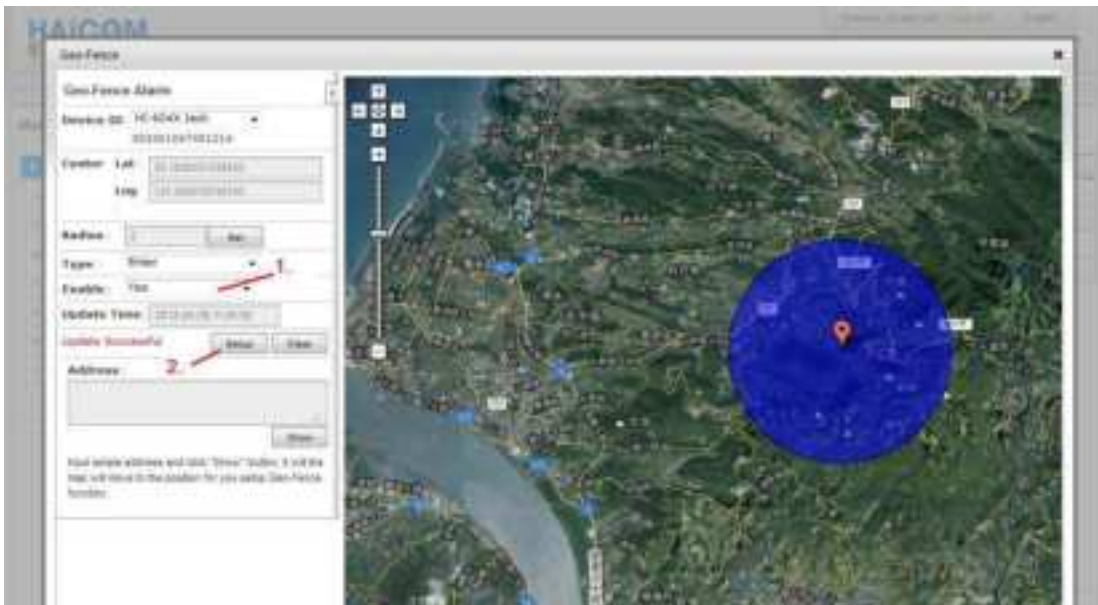

2. Set up geo fence from the Device Settings:

User can use different ways to set up the geo fence functions:

a. On the GPRS tracking site, go Manage and Device Setting and press “load”:

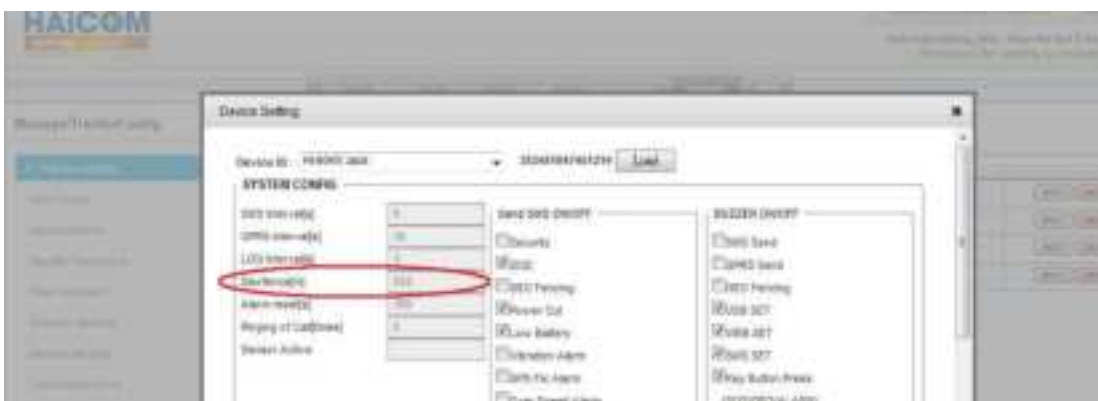

Set up the geo fence range, say 500 meters radius, the tracker will report to the preset phones while the feature triggered.

b. Connect the tracker to your computer and set up geo fence from the set up program:



c. The geo fence will triggered only once and user will set up again from the SMS command to activate the alarm once again:

ID	PARAMETER	SYSTEM EVENT
15	#0000,15	Inform Tracker call back to server
16	#0000,16,1 (1 is activated, 0 is deactivated)	<u>Set GEO Fencing activate</u>
17	#0000,17,1 (1 is activated, 0 is deactivated)	Set GPS FIX alarm activate
18	#0000,18,1 (1 is activated, 0 is deactivated)	Set Sensor (Moving) Alarm