




CH52

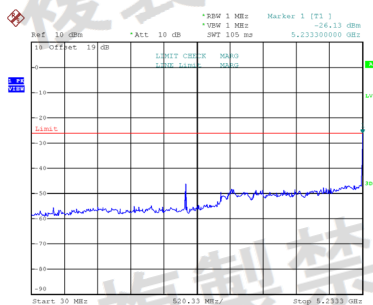


CH60 30 MHz ≤ f ≤ 5233.3 MHz

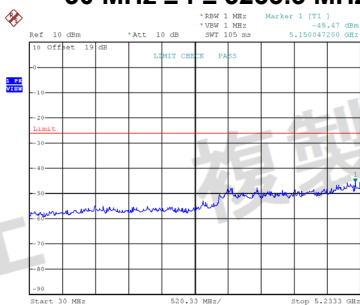




CH64

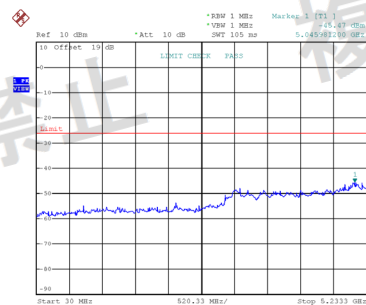


ZeroSP

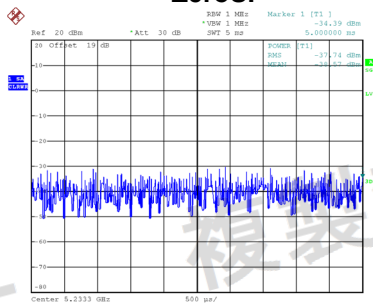


5233.3 MHz ≤ f ≤ 5240 MHz

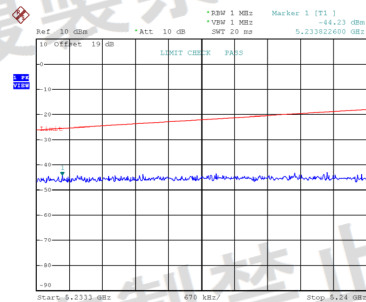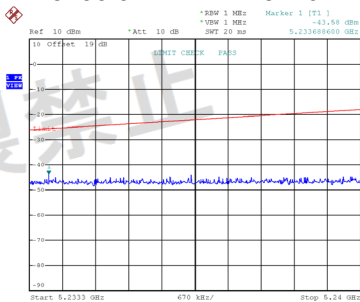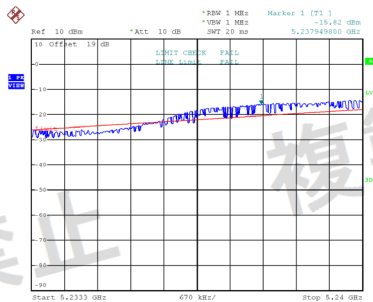

ZeroSP

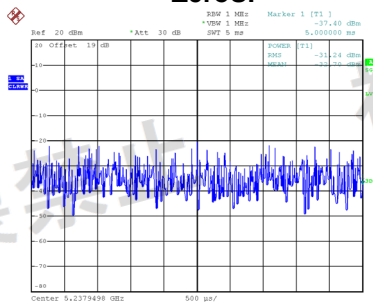


CH52

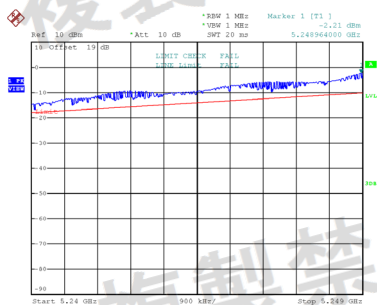

Date: 26.DEC.2025 15:35:49


CH60

5240 MHz < f ≤ 5249 MHz

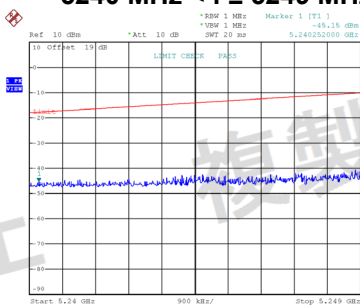


Date: 26.DEC.2025 15:38:57

CH64

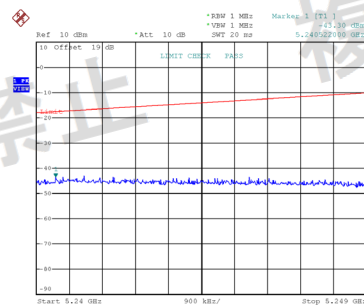


Date: 26.DEC.2025 15:41:56

ZeroSP

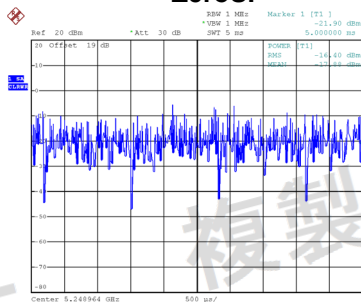


Date: 26.DEC.2025 15:35:54


5249 MHz < f ≤ 5249.8 MHz

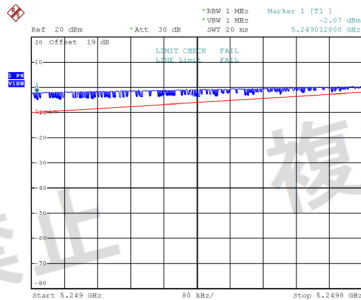

Date: 26.DEC.2025 15:35:59

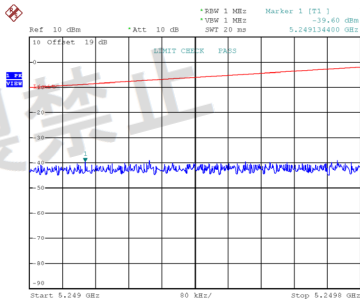


Date: 26.DEC.2025 15:39:02

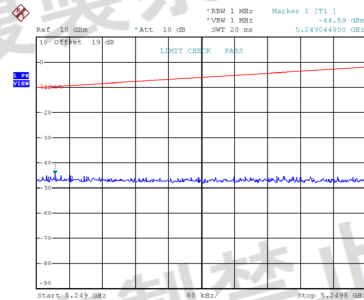


Date: 26.DEC.2025 15:42:01


ZeroSP

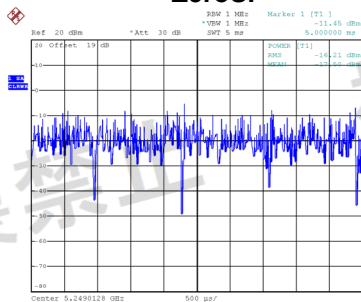


Date: 26.DEC.2025 15:36:03

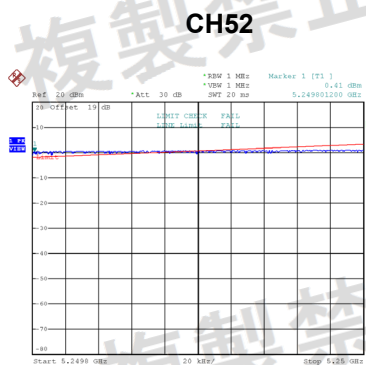


Date: 26.DEC.2025 15:36:09

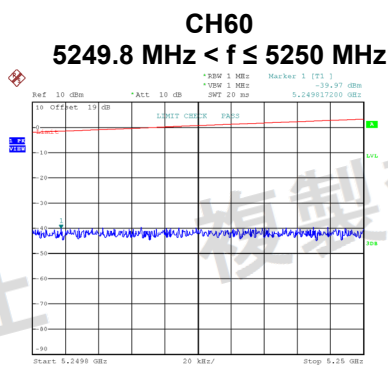


Date: 26.DEC.2025 15:39:07

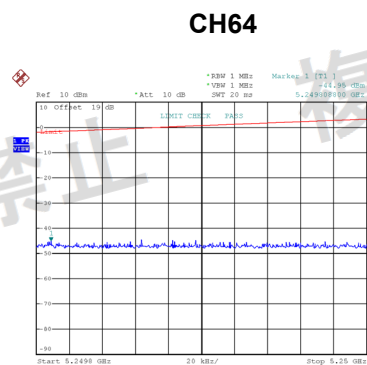


Date: 26-DEC-2025 15:42:06

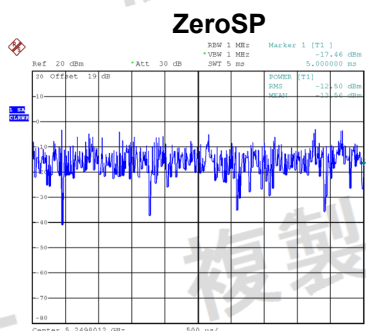


Date: 26-DEC-2025 15:36:13

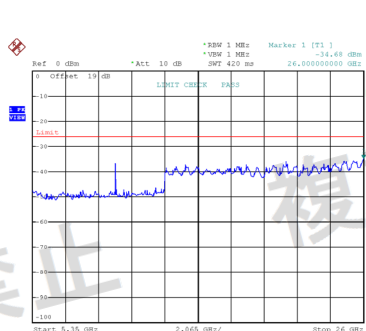

Date: 26-DEC-2025 15:36:22

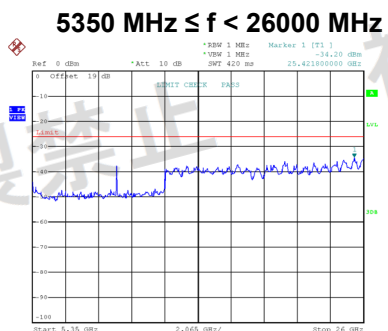

Date: 26-DEC-2025 15:39:16

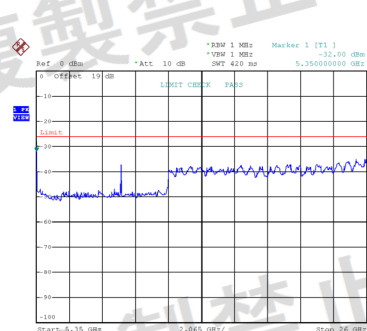

Date: 26 DEC 2025 15:42:15

Test Mode: IEEE 802.11ac(VHT40) - W53


Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Max value in the band)	MHz	5221.60	5221.60	30MHz ~ 5221.6MHz
	dBm/MHz	-35.64	-41.37	Limit $\leq 2.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.27290	0.07295	(-26.02 dBm/MHz)
	MHz	5229.98	5223.48	5221.6MHz ~ 5230MHz
	dBm/MHz	-30.56	-37.07	Limit $\leq 2.5 \sim 7.9 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.87902	0.19634	(-26 ~ -21 dBm/MHz)
	MHz	5234.03	5245.77	5230MHz ~ 5249MHz
	dBm/MHz	-26.79	-32.08	Limit $\leq 7.9 \sim 50 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	2.09411	0.61944	(-21 ~ -13 dBm/MHz)
	MHz	5249.00	5249.01	5249MHz ~ 5250MHz
	dBm/MHz	-20.69	-33.95	Limit $\leq 50 \sim 500 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	8.53100	0.40272	(-13 ~ -3 dBm/MHz)
	MHz	5351.88	5350.29	5350MHz ~ 5358.4MHz
	dBm/MHz	-34.63	-33.15	Limit $\leq 15 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.34435	0.48417	(-18.24 dBm/MHz)
	MHz	26000.00	5358.40	5358.4MHz ~ 26000MHz
	dBm/MHz	-34.63	-37.94	Limit $\leq 2.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.34435	0.16069	(-26.02 dBm/MHz)

Note:

Explanation of Marker and ZeroSP test:


- 1) The frequency of Marker during testing is the frequency that exceeds the limit the most.
- 2) The testing of ZeroSP is the worst, covering the entire frequency band.

CH54

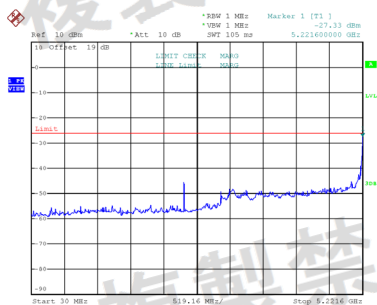


CH62



30 MHz ≤ f ≤ 5221.6 MHz

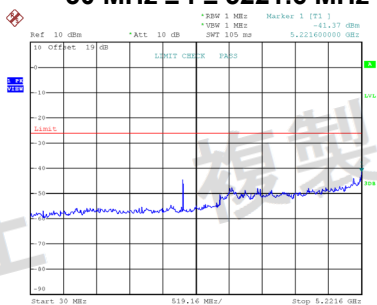


ZeroSP

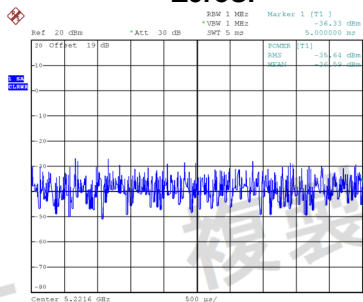


5221.6 MHz ≤ f ≤ 5230 MHz

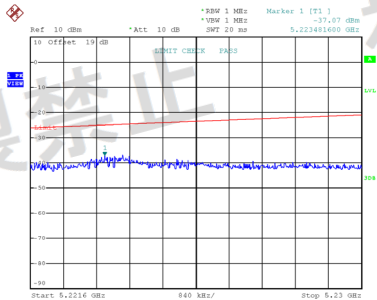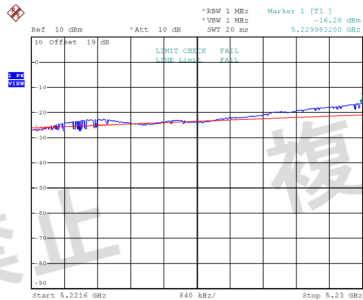

ZeroSP

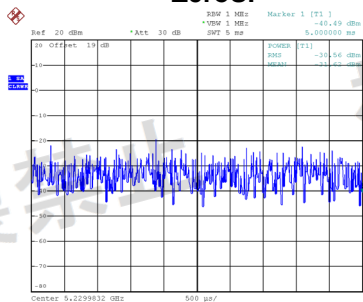


CH54

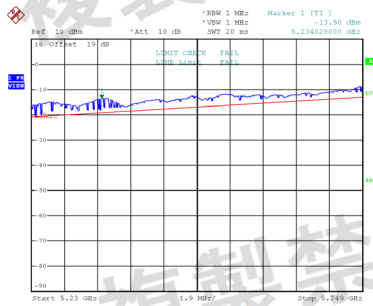


CH62


5230 MHz < f ≤ 5249 MHz

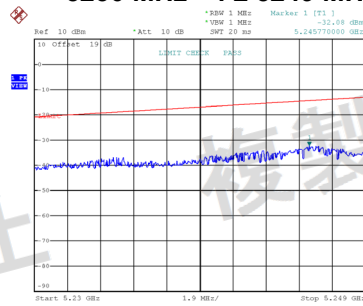


ZeroSP

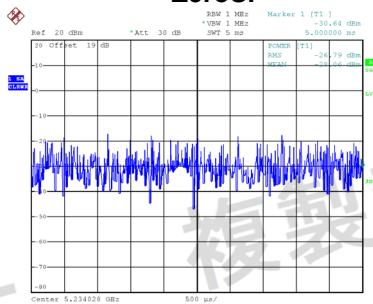


5249 MHz ≤ f < 5250 MHz

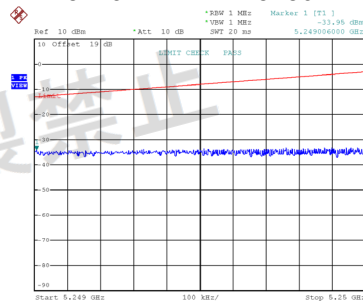

ZeroSP

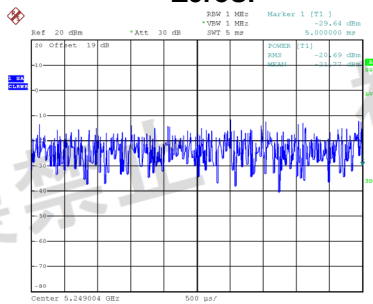

CH54

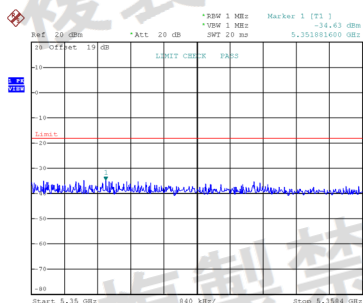

Date: 6.JAN.2026 10:58:59


CH62

5350 MHz ≤ f < 5358.4 MHz




Date: 6.JAN.2026 11:02:46

ZeroSP

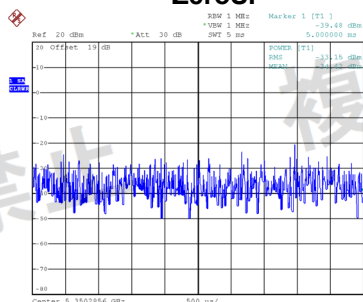


Date: 6-JAN-2026 11:02:50

5358.4 MHz < f ≤ 26000 MHz

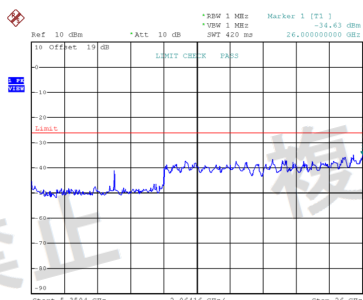

Date: 6.JAN.2026 10:59:08

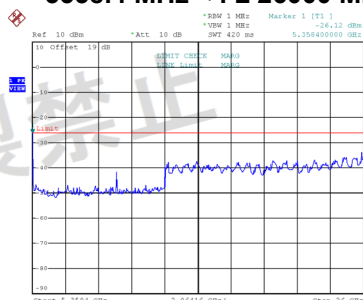

Date: 6.JAN.2026 11:03:00


Test Mode: IEEE 802.11ax(HE20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Max value in the band)	MHz	5233.30	5066.79	5098.01	30MHz ~ 5233.3MHz
	dBm/MHz	-35.34	-45.16	-45.70	Limit $\leq 2.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.29242	0.03048	0.02692	(-26.02 dBm/MHz)
	MHz	5237.44	5235.24	5233.35	5233.3MHz ~ 5240MHz
	dBm/MHz	-28.50	-40.94	-44.95	Limit $\leq 2.5 \sim 15.8 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	1.41254	0.08054	0.03199	(-26 ~ -18dBm/MHz)
	MHz	5241.24	5241.64	5240.05	5240MHz ~ 5249MHz
	dBm/MHz	-23.88	-39.61	-44.62	Limit $\leq 15.8 \sim 100 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	4.09261	0.10940	0.03451	(-18 ~ -10 dBm/MHz)
	MHz	5249.03	5249.01	5249.05	5249MHz ~ 5249.8MHz
	dBm/MHz	-15.46	-35.48	-44.52	Limit $\leq 100.0 \sim 631.0 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	28.44461	0.28314	0.03532	(-10 ~ -2 dBm/MHz)
	MHz	5249.80	5249.82	5249.81	5249.8 MHz ~ 5250 MHz
	dBm/MHz	-7.17	-36.68	-45.02	Limit $\leq 631 \sim 2154.4 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	191.86687	0.21478	0.03148	(-2 ~ 3.33dBm/MHz)
	MHz	25917.40	26000.00	26000.00	5350MHz ~ 26000MHz
	dBm/MHz	-35.06	-35.46	-34.09	Limit $\leq 2.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.31189	0.28445	0.38994	(-26.02 dBm/MHz)


Note:

Explanation of Marker and ZeroSP test:


- 1) The frequency of Marker during testing is the frequency that exceeds the limit the most.
- 2) The testing of ZeroSP is the worst, covering the entire frequency band.

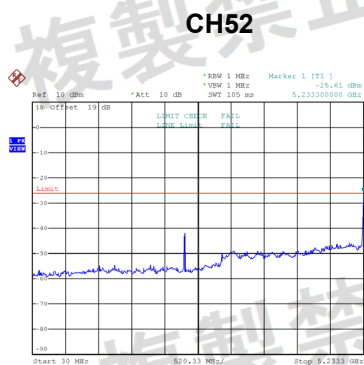


Date: 6.JAN.2026 10:13:15

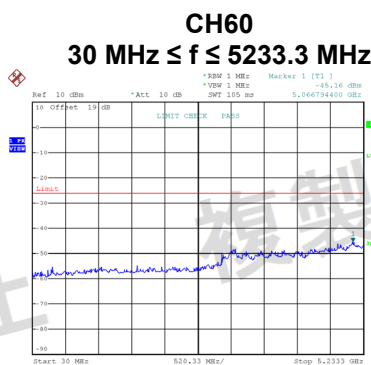


Date: 6.JAN.2026 10:16:37

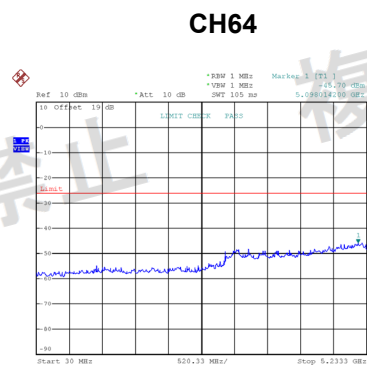


Date: 6.JAN.2026 10:18:28

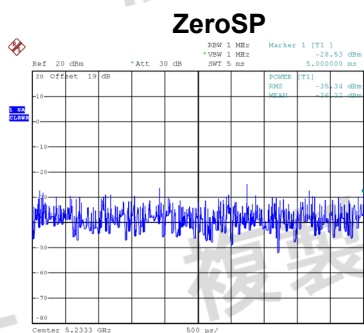


Date: 6 JAN 2026 10:13:19

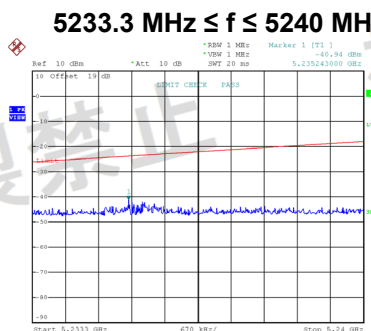

Date: 6 JAN 2026 10:16:41

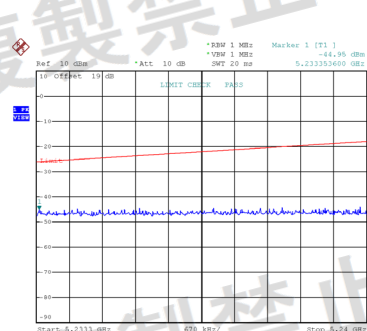


Date: 6 JAN 2026 10:18:32

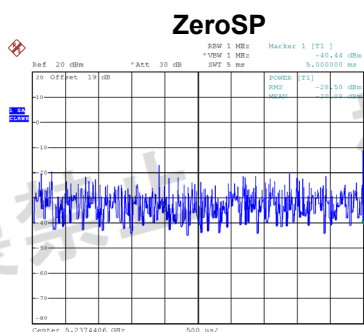

Date: 6.JAN.2026 10:13:28


CH52

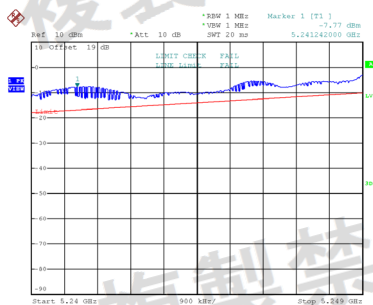

Date: 6.JAN.2026 10:13:34


CH60

5240 MHz < f ≤ 5249 MHz

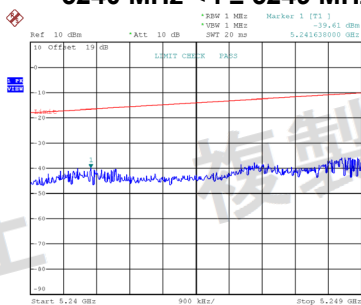


Date: 6.JAN.2026 10:16:46

CH64

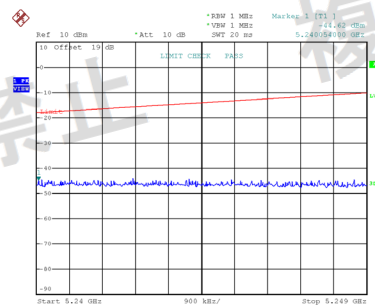


Date: 6.JAN.2026 10:18:37

ZeroSP

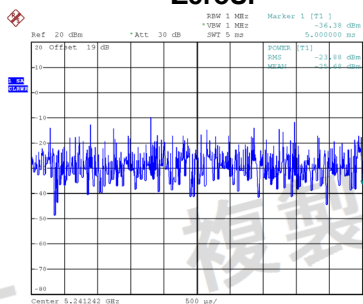


Date: 6.JAN.2026 10:13:38


5249 MHz < f ≤ 5249.8 MHz

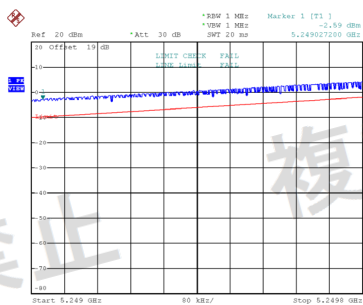

Date: 6.JAN.2026 10:13:44

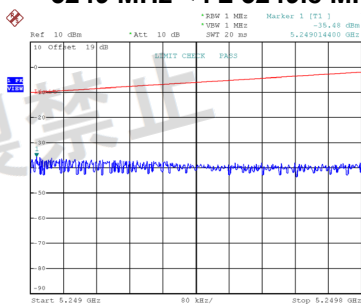


Date: 6.JAN.2026 10:16:51

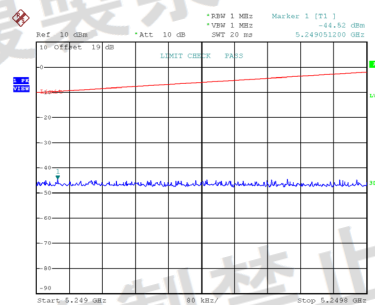


Date: 6.JAN.2026 10:18:49

ZeroSP

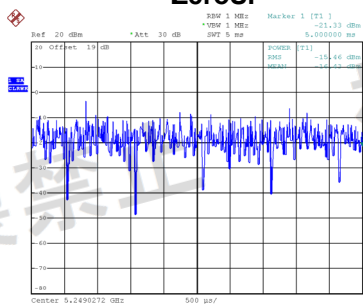

Date: 6.JAN.2026 10:13:48


CH52

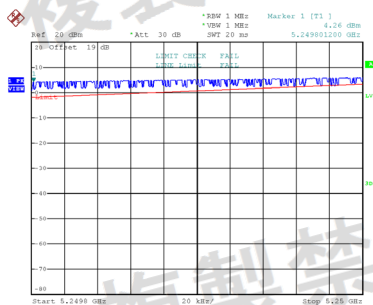

Date: 6.JAN.2026 10:13:53


CH60

5249.8 MHz < f ≤ 5250 MHz

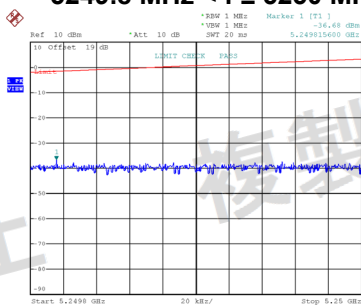


Date: 6.JAN.2026 10:16:56

CH64

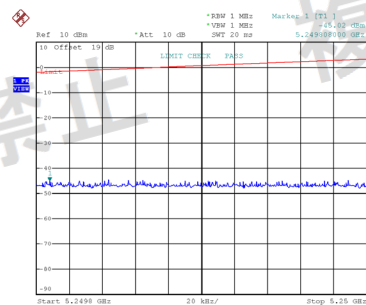


Date: 6.JAN.2026 10:18:47

ZeroSP

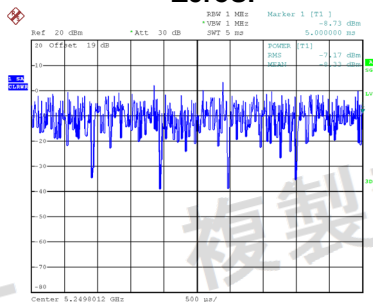


Date: 6.JAN.2026 10:13:57


5350 MHz ≤ f < 26000 MHz

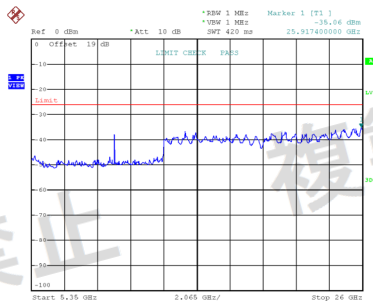

Date: 6.JAN.2026 10:14:07

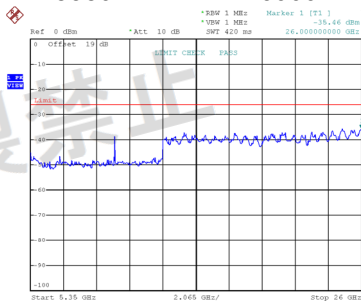

Date: 6.JAN.2026 10:17:05

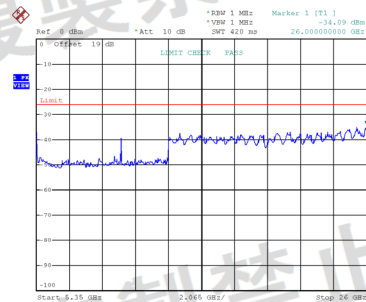

Date: 6.JAN.2026 10:18:56

Test Mode: IEEE 802.11ax(HE40) - W53


Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Max value in the band)	MHz	5221.60	5221.60	30MHz ~ 5221.6MHz
	dBm/MHz	-34.40	-42.95	Limit $\leq 2.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.36308	0.05070	(-26.02 dBm/MHz)
	MHz	5226.37	5221.97	5221.6MHz ~ 5230MHz
	dBm/MHz	-31.48	-40.23	Limit $\leq 2.5 \sim 7.9 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.71121	0.09484	(-26 ~ -21 dBm/MHz)
	MHz	5248.96	5246.19	5230MHz ~ 5249MHz
	dBm/MHz	-20.54	-31.42	Limit $\leq 7.9 \sim 50 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	8.83080	0.72111	(-21 ~ -13 dBm/MHz)
	MHz	5249.00	5249.00	5249MHz ~ 5250MHz
	dBm/MHz	-21.47	-35.07	Limit $\leq 50 \sim 500 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	7.12853	0.31117	(-13 ~ -3 dBm/MHz)
	MHz	5355.91	5350.02	5350MHz ~ 5358.4MHz
	dBm/MHz	-36.58	-20.96	Limit $\leq 15 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.21979	8.01678	(-18.24 dBm/MHz)
	MHz	24844.07	5358.40	5358.4MHz ~ 26000MHz
	dBm/MHz	-34.39	-31.81	Limit $\leq 2.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.36392	0.65917	(-26.02 dBm/MHz)

Note:

Explanation of Marker and ZeroSP test:


- 1) The frequency of Marker during testing is the frequency that exceeds the limit the most.
- 2) The testing of ZeroSP is the worst, covering the entire frequency band.

CH54

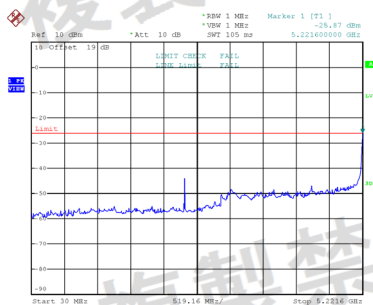


Date: 6.JAN.2026 11:50:23

CH62 30 MHz ≤ f ≤ 5221.6 MHz

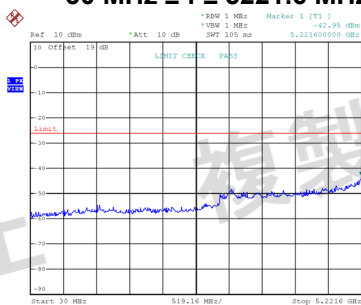


Date: 6.JAN.2026 11:52:42

ZeroSP

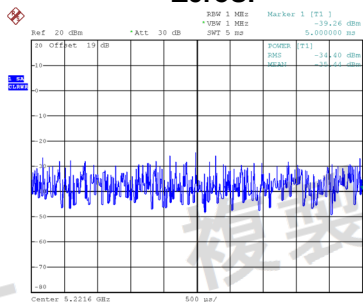


Date: 6.JAN.2026 11:50:28

5221.6 MHz ≤ f ≤ 5230 MHz

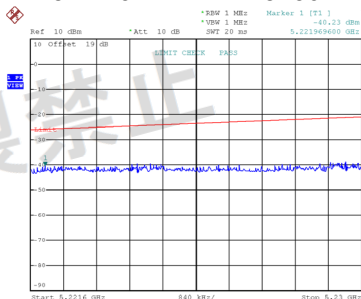


Date: 6.JAN.2026 11:52:48

ZeroSP

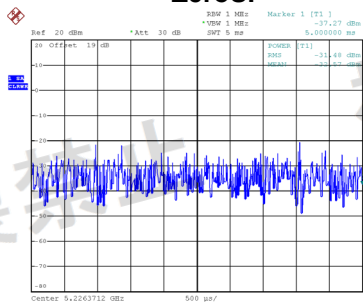

Date: 6.JAN.2026 11:50:39


CH54

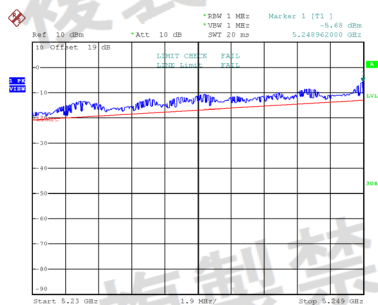

Date: 6.JAN.2026 11:50:45


CH62

5230 MHz < f ≤ 5249 MHz

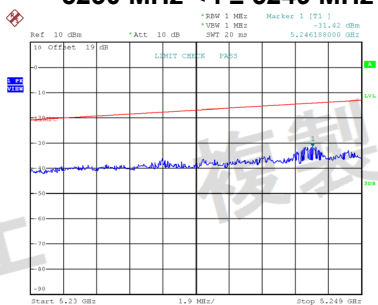


Date: 6.JAN.2026 11:52:54

ZeroSP

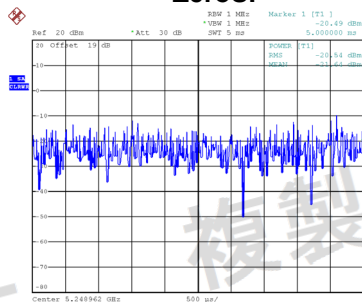


Date: 6.JAN.2026 11:50:50

5249 MHz ≤ f < 5250 MHz

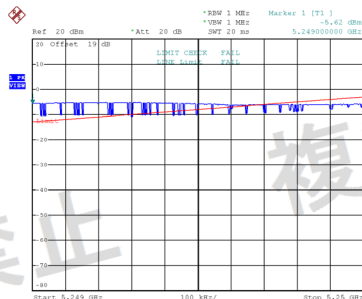


Date: 6.JAN.2026 11:50:56

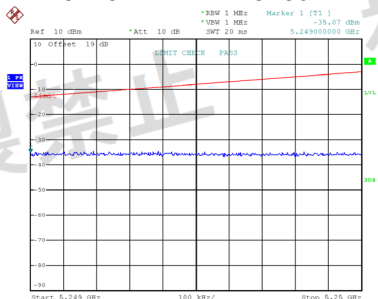


Date: 6.JAN.2026 11:53:00

ZeroSP

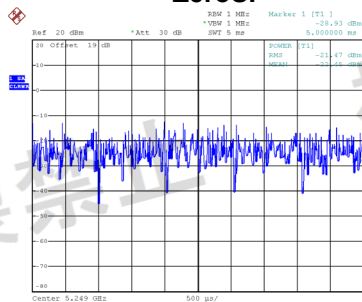

Date: 6.JAN.2026 11:51:01


CH54

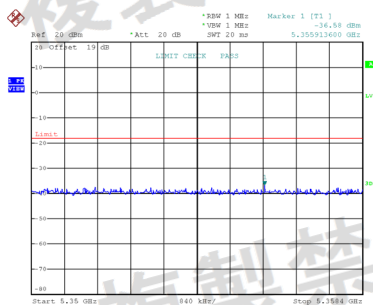

Date: 6.JAN.2026 11:53:02


CH62

5350 MHz ≤ f < 5358.4 MHz

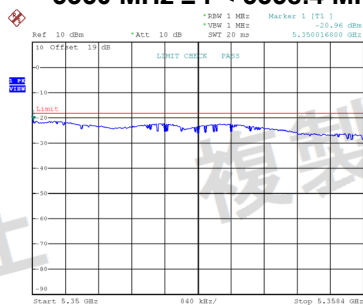


Date: 6.JAN.2026 11:53:05

5358.4 MHz < f ≤ 26000 MHz

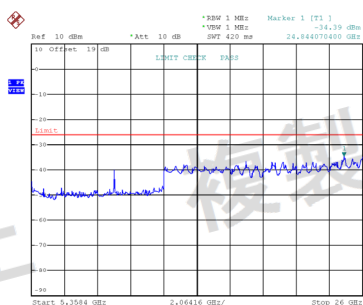

Date: 6.JAN.2026 11:53:17

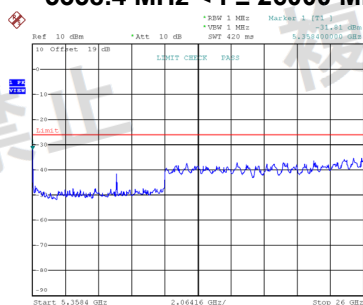


Date: 6.JAN.2026 11:53:15

Test Mode: IEEE 802.11a - W56


Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Max value in the band)	MHz	5231.94	2462.64	3146.82	30MHz ~ 5460MHz
	dBm/MHz	-38.09	-35.28	-36.89	Limit $\leq 2.5 \mu\text{W/MHz}$ (-26.02 dBm/MHz)
	$\mu\text{W/MHz}$	0.15524	0.29648	0.20464	
	MHz	5468.86	5467.46	5460.84	5460MHz ~ 5470MHz
	dBm/MHz	-27.38	-36.95	-36.31	Limit $\leq 12.5 \mu\text{W/MHz}$ (-19.03 dBm/MHz)
	$\mu\text{W/MHz}$	1.82810	0.20184	0.23388	
	MHz	5761.84	5748.88	5747.28	5745MHz ~ 5765MHz
	dBm/MHz	-38.77	-38.26	-22.67	Limit $\leq 12.5 \mu\text{W/MHz}$ (-19.03 dBm/MHz)
	$\mu\text{W/MHz}$	0.13274	0.14928	5.40754	
	MHz	24907.31	24947.78	5765.00	5765MHz ~ 26000MHz
	dBm/MHz	-34.55	-34.93	-42.54	Limit $\leq 2.5 \mu\text{W/MHz}$ (-26.02 dBm/MHz)
	$\mu\text{W/MHz}$	0.35075	0.32137	0.05572	

CH100

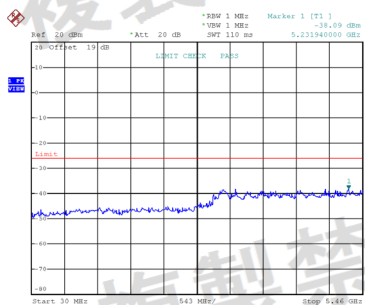


Date: 26.DEC.2025 14:55:43

CH120 30 MHz ≤ f ≤ 5460 MHz

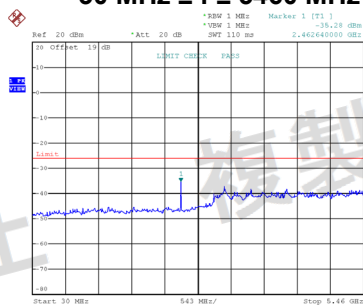


Date: 26.DEC.2025 15:00:05

CH144

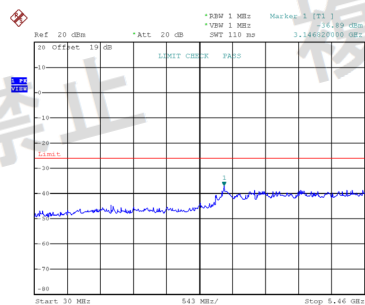


Date: 26.DEC.2025 15:04:24


5460 MHz ≤ f ≤ 5470 MHz

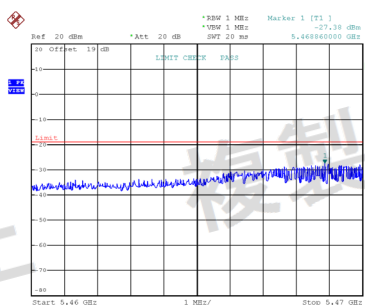

Date: 26.DEC.2025 14:55:48

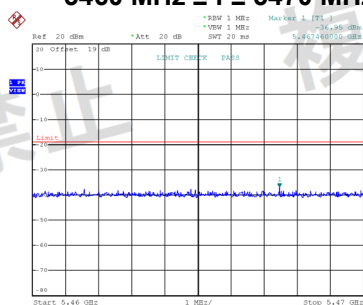


Date: 26.DEC.2025 15:00:10

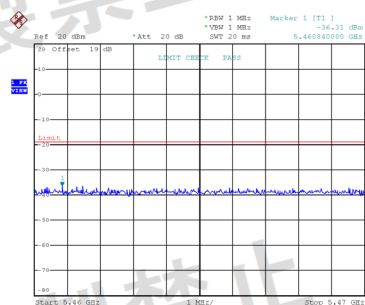


Date: 26.DEC.2025 15:04:29


5745 MHz ≤ f ≤ 5765 MHz

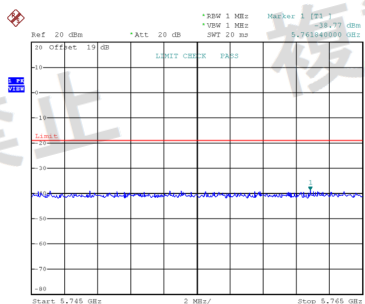

Date: 26.DEC.2025 14:55:52

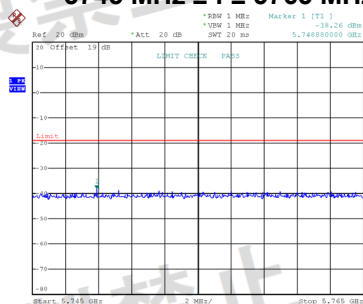


Date: 26.DEC.2025 15:00:15

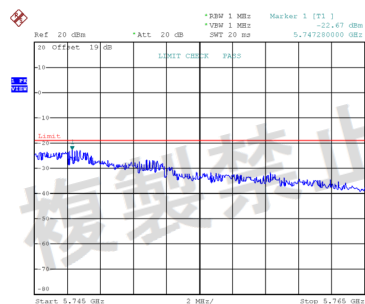


Date: 26.DEC.2025 15:04:34


5765 MHz ≤ f < 26000 MHz

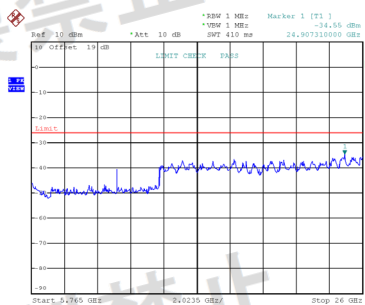

Date: 26.DEC.2025 14:56:02

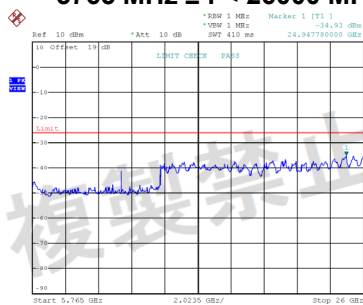

Date: 26.DEC.2025 15:00:24

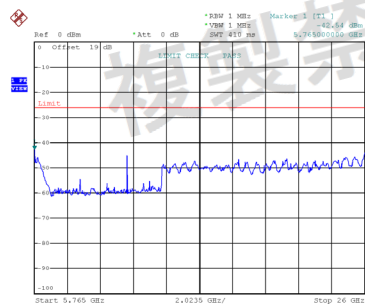

Date: 26.DEC.2025 15:04:43

Test Mode:	IEEE 802.11ac(VHT20) - W56
------------	----------------------------


Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Max value in the band)	MHz	5460.00	4450.02	3168.54	30MHz ~ 5460MHz
	dBm/MHz	-36.94	-37.32	-37.39	Limit $\leq 2.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.20230	0.18535	0.18239	(-26.02 dBm/MHz)
	MHz	5469.98	5464.82	5460.80	5460MHz ~ 5470MHz
	dBm/MHz	-29.31	-37.45	-36.17	Limit $\leq 12.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	1.17220	0.17989	0.24155	(-19.03 dBm/MHz)
	MHz	5760.00	5751.72	5745.60	5745MHz ~ 5765MHz
	dBm/MHz	-38.12	-38.17	-36.24	Limit $\leq 12.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.15417	0.15241	0.23768	(-19.03 dBm/MHz)
	MHz	24785.90	26000.00	5765.00	5765MHz ~ 26000MHz
	dBm/MHz	-34.48	-34.88	-39.09	Limit $\leq 2.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.35645	0.32509	0.12331	(-26.02 dBm/MHz)

Note:


Explanation of Marker and ZeroSP test:

- 3) The frequency of Marker during testing is the frequency that exceeds the limit the most.
- 4) The testing of ZeroSP is the worst, covering the entire frequency band.

CH100

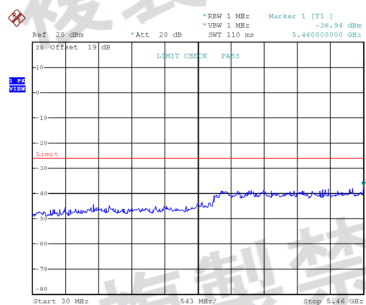


Date: 26.DEC.2025 15:48:18

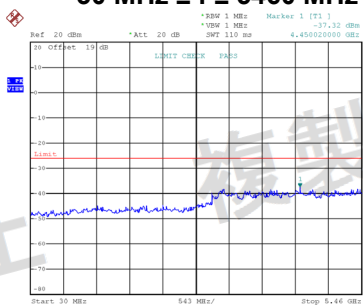
CH120
30 MHz $\leq f \leq$ 5460 MHz

Date: 26.DEC.2025 15:52:31


CH144

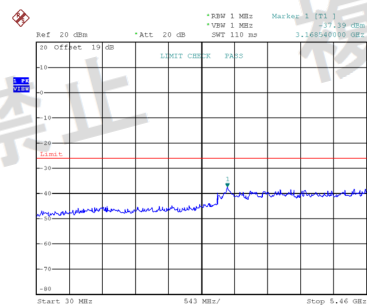


Date: 26.DEC.2025 16:00:13

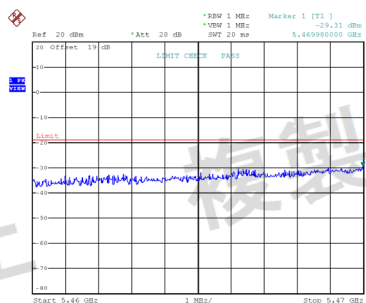5460 MHz $\leq f \leq$ 5470 MHz


Date: 26.DEC.2025 15:48:17

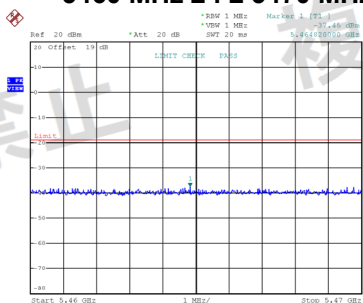


Date: 26.DEC.2025 15:52:36

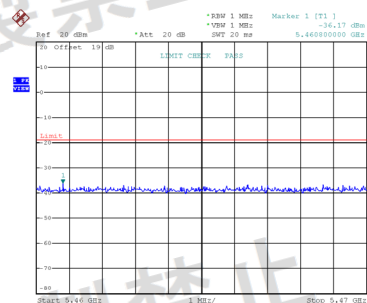


Date: 26.DEC.2025 16:00:18

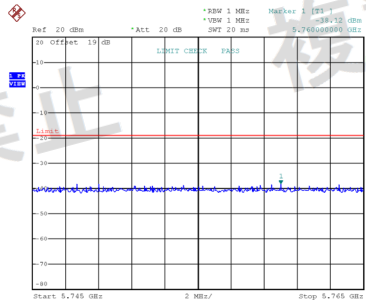5745 MHz $\leq f \leq$ 5765 MHz

Date: 26.DEC.2025 15:48:22

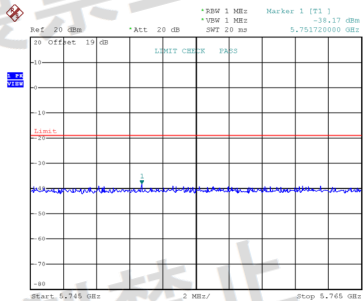


Date: 26.DEC.2025 15:52:40

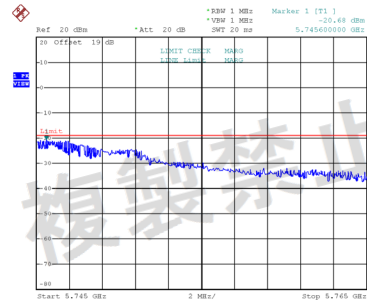


Date: 26.DEC.2025 16:00:22

ZeroSP

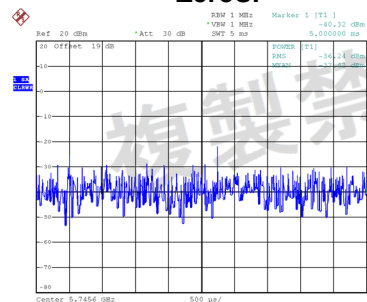


Date: 26.DEC.2025 16:00:26

CH100

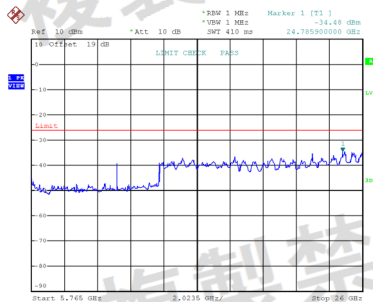


CH120

5765 MHz ≤ f < 26000 MHz

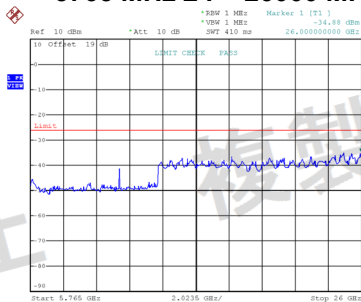


CH144

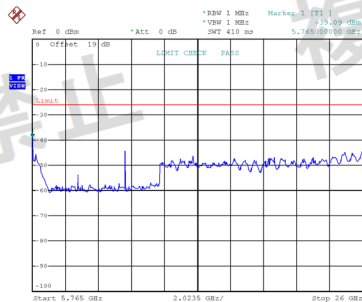


Test Mode: IEEE 802.11ac(VHT40) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Max value in the band)	MHz	5460.00	5373.12	5438.28	30MHz ~ 5460MHz
	dBm/MHz	-28.23	-40.50	-39.39	Limit $\leq 12.5 \mu\text{W/MHz}$ (-19.03 dBm/MHz)
	$\mu\text{W/MHz}$	1.50314	0.08913	0.11508	
	MHz	5470.00	5465.42	5469.42	5460MHz ~ 5470MHz
	dBm/MHz	-15.75	-40.51	-36.88	Limit $\leq 50 \mu\text{W/MHz}$ (-13.01 dBm/MHz)
	$\mu\text{W/MHz}$	26.60725	0.08892	0.20512	
	MHz	25959.54	24786.20	5770.00	5770MHz ~ 26000MHz
	dBm/MHz	-34.20	-35.01	-29.38	Limit $\leq 12.5 \mu\text{W/MHz}$ (-19.03 dBm/MHz)
	$\mu\text{W/MHz}$	0.38019	0.31550	1.15345	

CH102

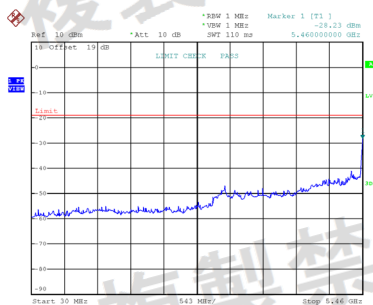


Date: 6.JAN.2026 11:06:30

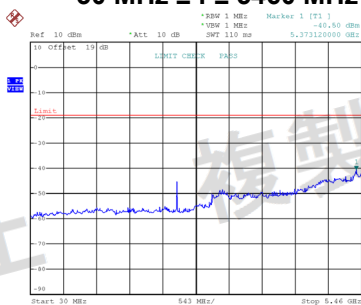
CH118
30 MHz $\leq f \leq$ 5460 MHz

Date: 6.JAN.2026 11:09:07


CH142

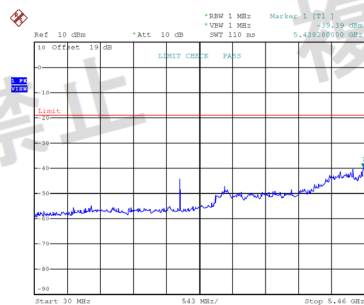


Date: 6.JAN.2026 11:13:14

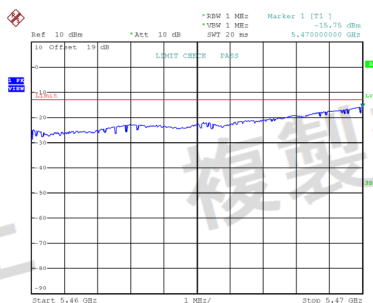5460 MHz $\leq f <$ 5470 MHz


Date: 6.JAN.2026 11:06:35

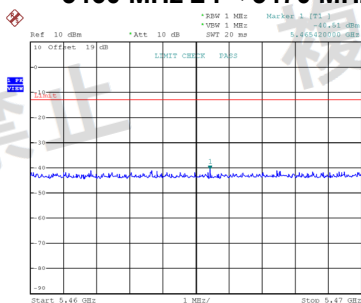


Date: 6.JAN.2026 11:09:13

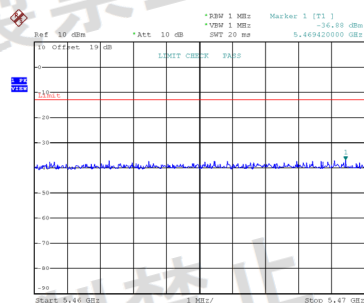


Date: 6.JAN.2026 11:13:20

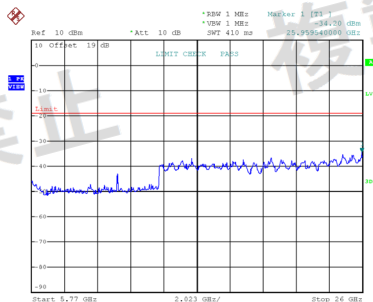5770 MHz $< f \leq$ 26000 MHz

Date: 6.JAN.2026 11:06:45

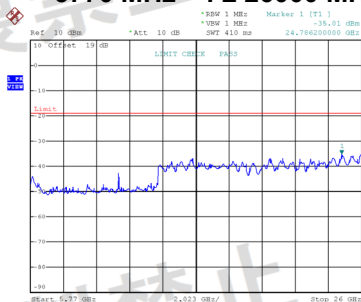

Date: 6.JAN.2026 11:09:23

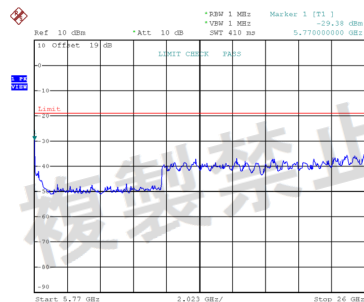


Date: 6.JAN.2026 11:13:30

Test Mode: IEEE 802.11ax(HE20) - W56


Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Max value in the band)	MHz	5460.00	5329.68	5449.14	30MHz ~ 5460MHz
	dBm/MHz	-35.95	-37.39	-37.28	Limit $\leq 2.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.25410	0.18239	0.18707	(-26.02 dBm/MHz)
	MHz	5467.10	5468.76	5467.56	5460MHz ~ 5470MHz
	dBm/MHz	-24.03	-36.87	-35.54	Limit $\leq 12.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	3.95367	0.20559	0.27925	(-19.03 dBm/MHz)
	MHz	5760.52	5750.28	5745.00	5745MHz ~ 5765MHz
	dBm/MHz	-38.10	-37.84	-32.26	Limit $\leq 12.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.15488	0.16444	0.59429	(-19.03 dBm/MHz)
	MHz	25392.95	25392.95	5765.00	5765MHz ~ 26000MHz
	dBm/MHz	-35.24	-34.40	-41.98	Limit $\leq 2.5 \mu\text{W/MHz}$
	$\mu\text{W/MHz}$	0.29923	0.36308	0.06339	(-26.02 dBm/MHz)

CH100

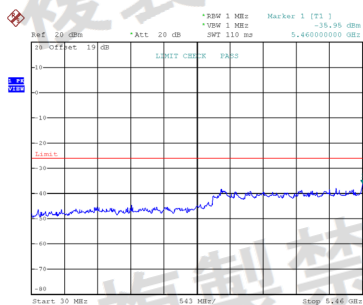


CH120




30 MHz ≤ f ≤ 5460 MHz

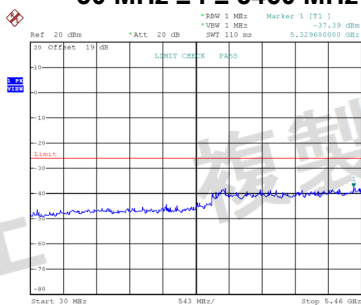




CH144

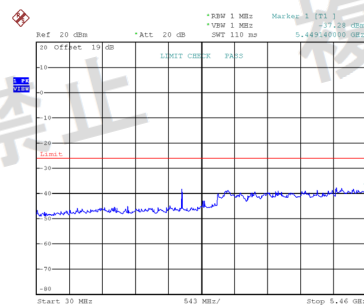




5460 MHz ≤ f ≤ 5470 MHz

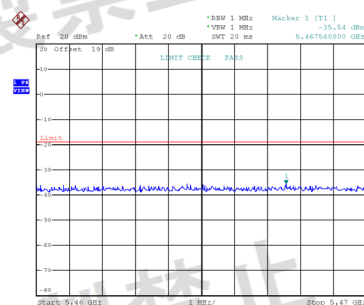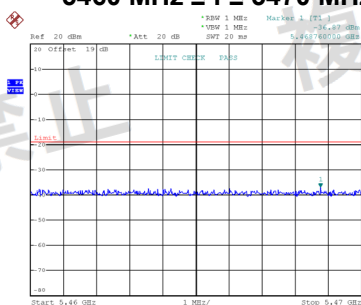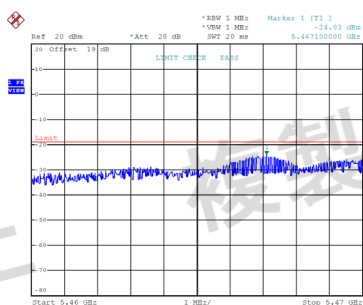

5745 MHz ≤ f ≤ 5765 MHz

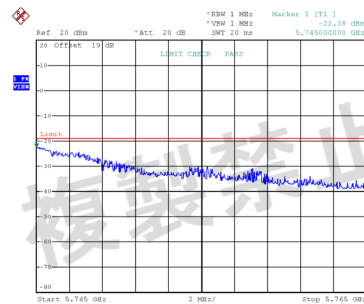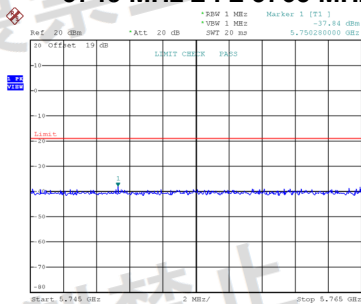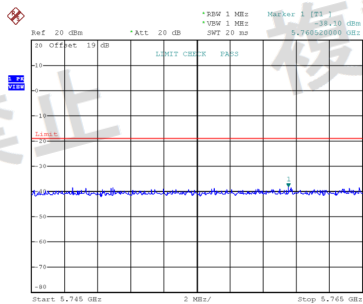


5765 MHz ≤ f < 26000 MHz

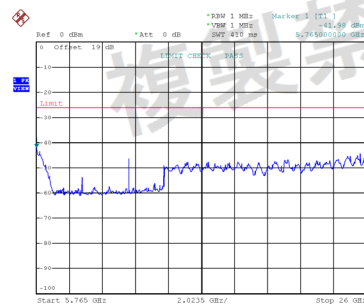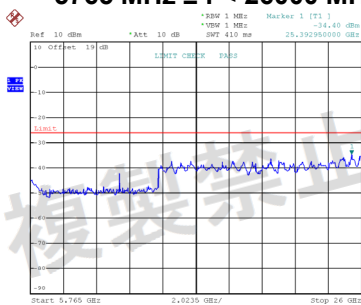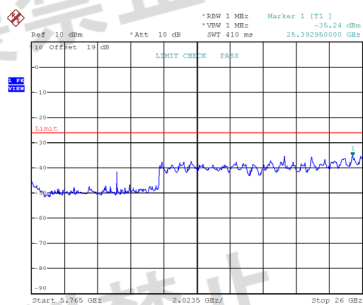

Test Mode: IEEE 802.11ax(HE40) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Unwanted Emission Intensity (Max value in the band)	MHz	5460.00	5351.40	5460.00	30MHz ~ 5460MHz
	dBm/MHz	-27.38	-41.11	-41.28	Limit $\leq 12.5 \mu\text{W/MHz}$ (-19.03 dBm/MHz)
	$\mu\text{W/MHz}$	1.82810	0.07745	0.07447	
	MHz	5467.48	5469.92	5466.62	5460MHz ~ 5470MHz
	dBm/MHz	-17.10	-40.86	-37.16	Limit $\leq 50 \mu\text{W/MHz}$ (-13.01 dBm/MHz)
	$\mu\text{W/MHz}$	19.49845	0.08204	0.19231	
	MHz	24826.66	24826.66	5770.00	5770MHz ~ 26000MHz
	dBm/MHz	-35.30	-35.11	-32.19	Limit $\leq 12.5 \mu\text{W/MHz}$ (-19.03 dBm/MHz)
	$\mu\text{W/MHz}$	0.29512	0.30832	0.60395	


CH102

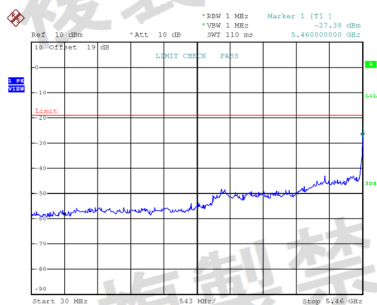

Date: 6.JAN.2026 11:55:58


CH118

30 MHz ≤ f ≤ 5460 MHz

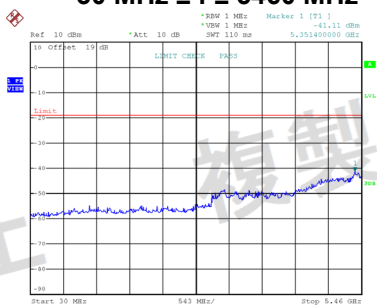


Date: 6.JAN.2026 13:06:48

CH142

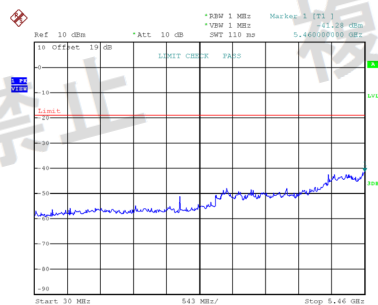


Date: 6.JAN.2026 13:08:58


5460 MHz ≤ f < 5470 MHz

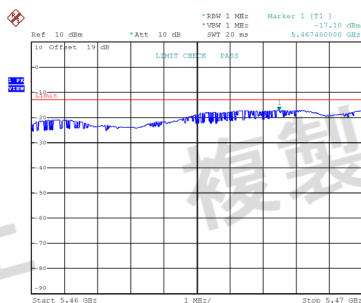

Date: 6.JAN.2026 11:56:04

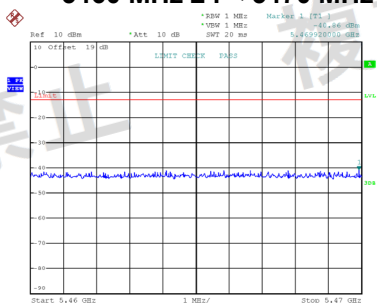


Date: 6.JAN.2026 13:06:53

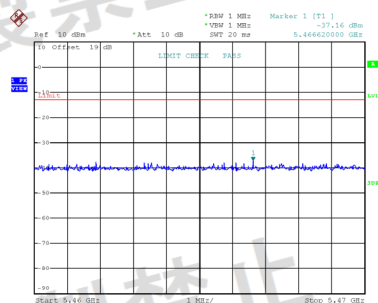


Date: 6.JAN.2026 13:09:04


5770 MHz < f ≤ 26000 MHz

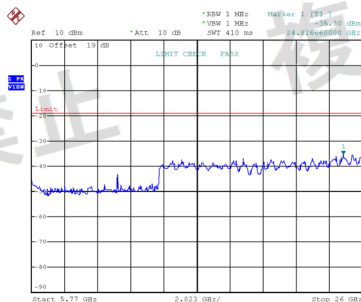

Date: 6.JAN.2026 11:56:13

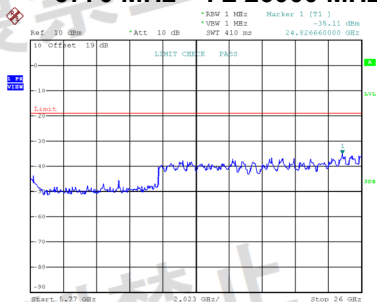

Date: 6.JAN.2026 13:07:03

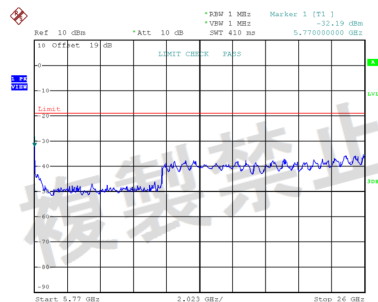

Date: 6.JAN.2026 13:09:13


APPENDIX D - ANTENNA POWER TOLERANCE

Test Mode:	IEEE 802.11a - W52
------------	--------------------

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5180	5200	5240	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.3551	4.3251	4.2005	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.36			-
Antenna Power Tolerance (%)	-0.11	-0.80	-3.66	Limit + 20% ~ - 80%
EIRP (mW/MHz)	8.6896	8.6298	8.3811	Limit ≤ 10 mW/MHz

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

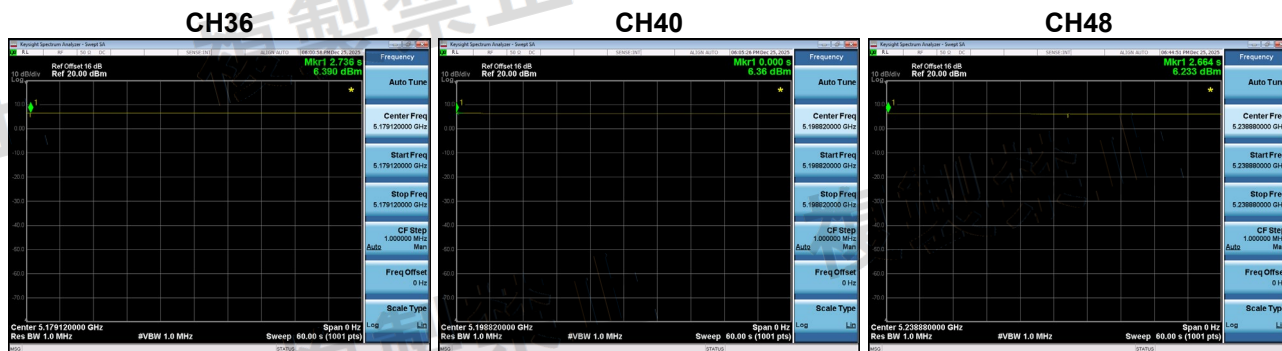


Test Mode: IEEE 802.11ac(VHT20) - W52

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5180	5200	5240	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.7753	4.6345	4.7098	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.78			-
Antenna Power Tolerance (%)	-0.10	-3.04	-1.47	Limit + 20% ~ - 80%
EIRP (mW/MHz)	9.5280	9.2470	9.3972	Limit ≤ 10 mW/MHz

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

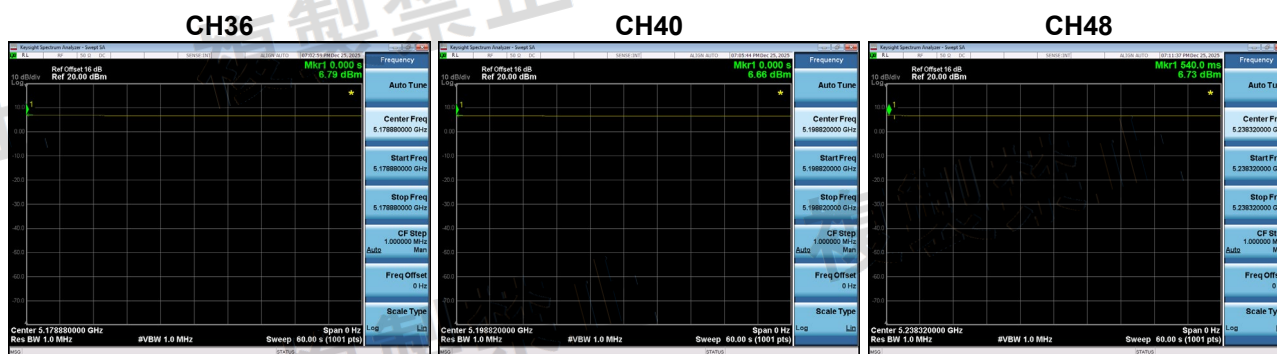


Test Mode: IEEE 802.11ac(VHT40) - W52

Test Voltage	Normal Voltage		Remarks
Test Frequency (MHz)	5190	5230	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	2.3556	2.4604	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.46		-
Antenna Power Tolerance (%)	-4.24	+0.02	Limit + 20% ~ - 80%
EIRP (mW/MHz)	4.7000	4.9091	Limit ≤ 5 mW/MHz

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

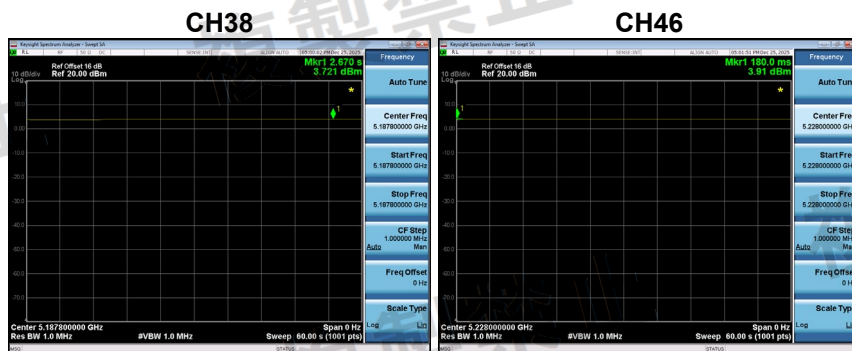


Test Mode: IEEE 802.11ax(HE20) - W52

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5180	5200	5240	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.3251	4.5394	4.8117	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.81			-
Antenna Power Tolerance (%)	-10.08	-5.63	+0.04	Limit + 20% ~ - 80%
EIRP (mW/MHz)	8.6298	9.0573	9.6006	Limit ≤ 10 mW/MHz

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

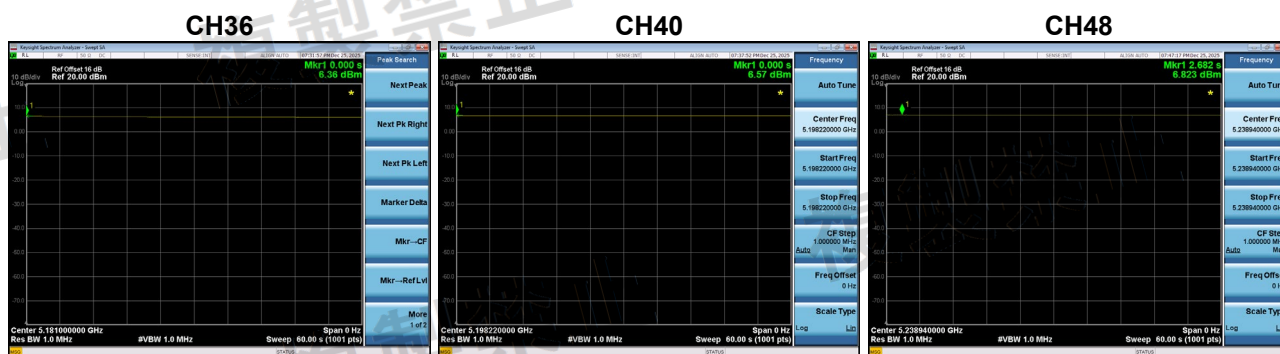


Test Mode: IEEE 802.11ax(HE40) - W52

Test Voltage	Normal Voltage		Remarks
Test Frequency (MHz)	5190	5230	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	2.3801	2.3714	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.38		-
Antenna Power Tolerance (%)	+0.00	-0.36	Limit + 20% ~ - 80%
EIRP (mW/MHz)	4.7490	4.7315	Limit ≤ 5 mW/MHz

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

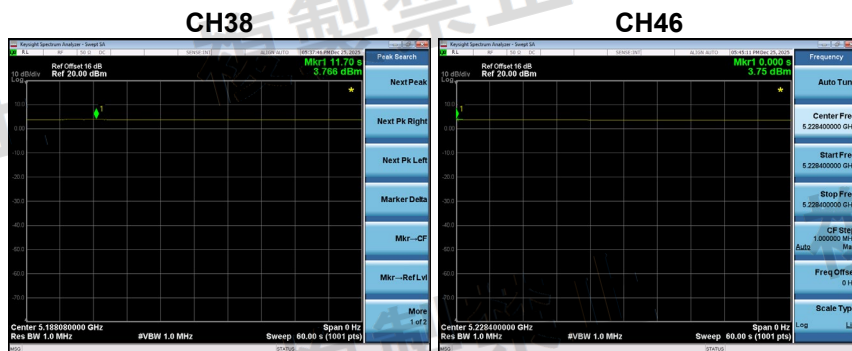

Test Mode:	IEEE 802.11a - W53
------------	--------------------

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5260	5300	5320	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.2005	4.6741	4.2884	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.67			-
Antenna Power Tolerance (%)	-10.05	+0.09	-8.17	Limit + 20% ~ - 80%
EIRP (mW/MHz)	8.3811	9.3261	8.5566	Limit ≤ 10 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)



Test Mode: IEEE 802.11ac(VHT20) - W53

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5260	5300	5320	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.5499	4.3904	4.9374	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.94			-
Antenna Power Tolerance (%)	-7.90	-11.13	-0.05	Limit + 20% ~ - 80%
EIRP (mW/MHz)	9.0782	8.7599	9.8514	Limit ≤ 10 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)




Test Mode: IEEE 802.11ac(VHT40) - W53

Test Voltage	Normal Voltage		Remarks
Test Frequency (MHz)	5270	5310	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	2.3388	2.3486	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.35		-
Antenna Power Tolerance (%)	-0.48	-0.06	Limit + 20% ~ - 80%
EIRP (mW/MHz)	4.6666	4.6860	Limit ≤ 5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

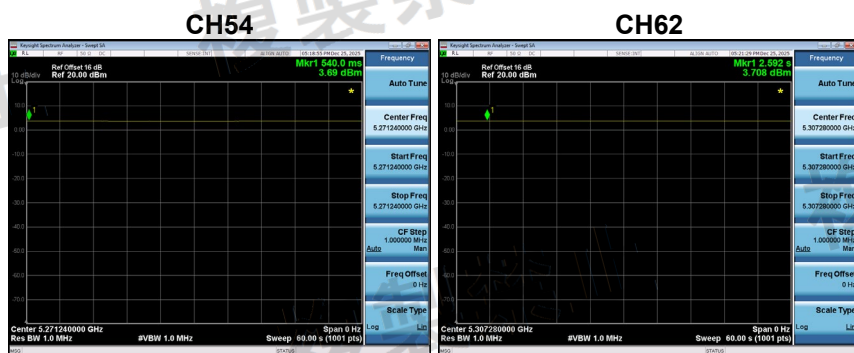


Test Mode: IEEE 802.11ax(HE20) - W53

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5260	5300	5320	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.6559	4.6238	4.6036	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.66			-
Antenna Power Tolerance (%)	-0.09	-0.78	-1.21	Limit + 20% ~ - 80%
EIRP (mW/MHz)	9.2897	9.2257	9.1854	Limit ≤ 10 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

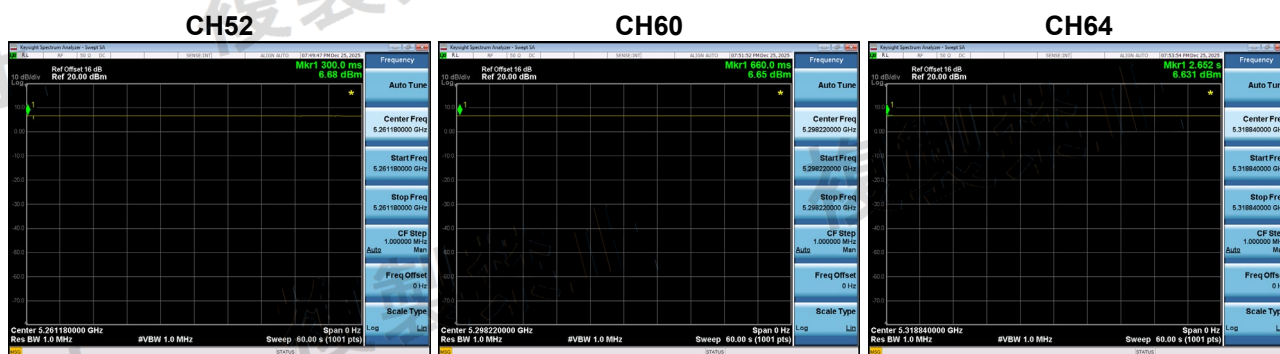


Test Mode: IEEE 802.11ax(HE40) - W53

Test Voltage	Normal Voltage		Remarks
Test Frequency (MHz)	5270	5310	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	2.3988	2.4831	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.48		-
Antenna Power Tolerance (%)	-3.27	+0.12	Limit + 20% ~ - 80%
EIRP (mW/MHz)	4.7863	4.9545	Limit ≤ 5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

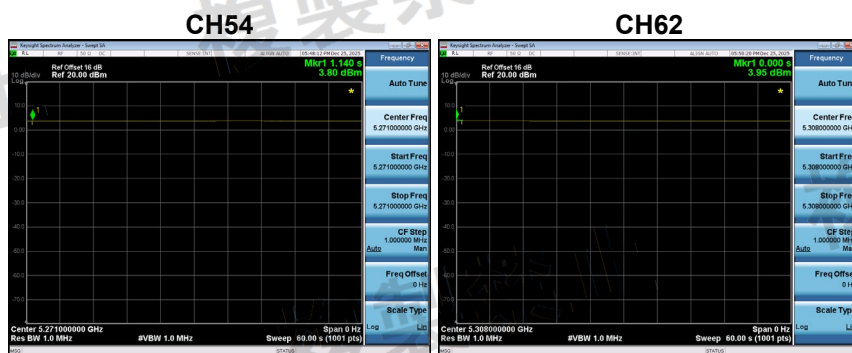


Test Mode: IEEE 802.11a - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5500	5600	5720	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	9.4406	9.6627	9.4189	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	9.66			-
Antenna Power Tolerance (%)	-2.27	+0.03	-2.50	Limit + 50% ~ - 50%
EIRP (mW/MHz)	18.8365	19.2797	18.7932	Limit ≤ 50 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

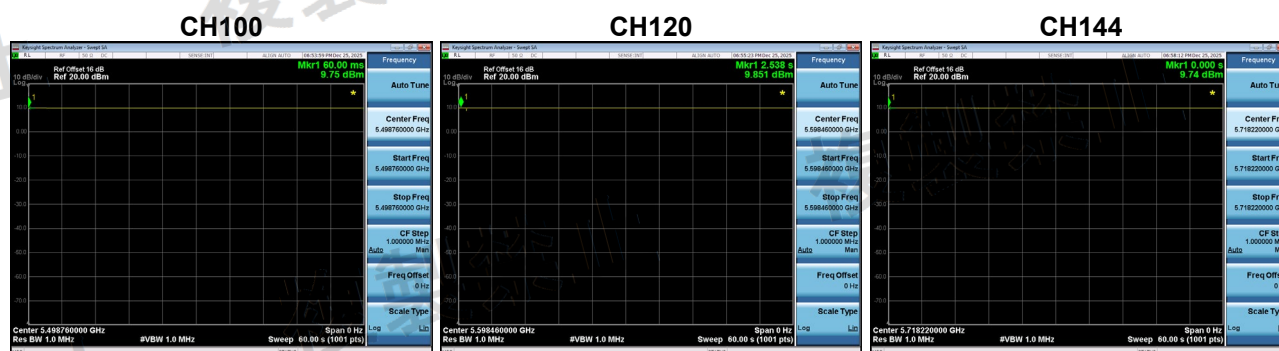


Test Mode: IEEE 802.11ac(VHT20) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5500	5600	5720	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	7.8163	8.3483	9.1411	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	9.14			-
Antenna Power Tolerance (%)	-14.48	-8.66	+0.01	Limit + 50% ~ - 50%
EIRP (mW/MHz)	15.5955	16.6571	18.2390	Limit ≤ 50 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

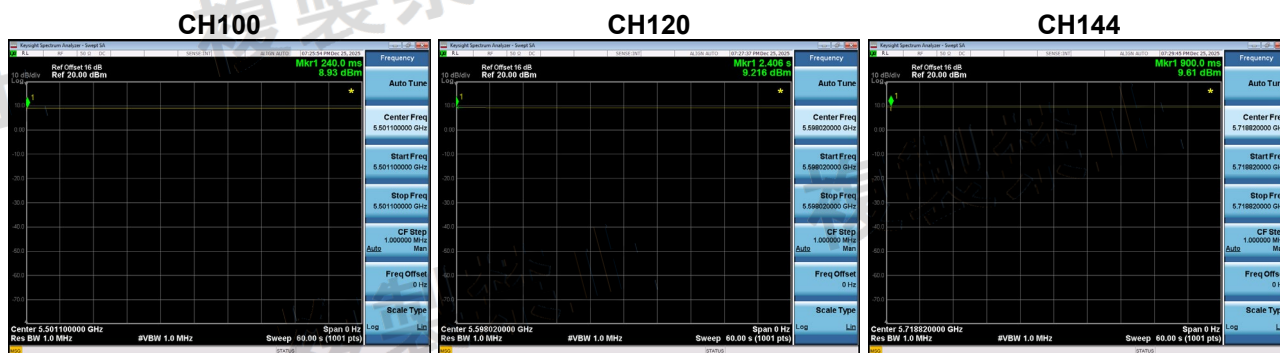


Test Mode: IEEE 802.11ac(VHT40) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5510	5590	5710	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.4999	4.3823	4.4198	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.50			-
Antenna Power Tolerance (%)	0.00	-2.62	-1.78	Limit + 50% ~ - 50%
EIRP (mW/MHz)	8.9784	8.7438	8.8186	Limit ≤ 25 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

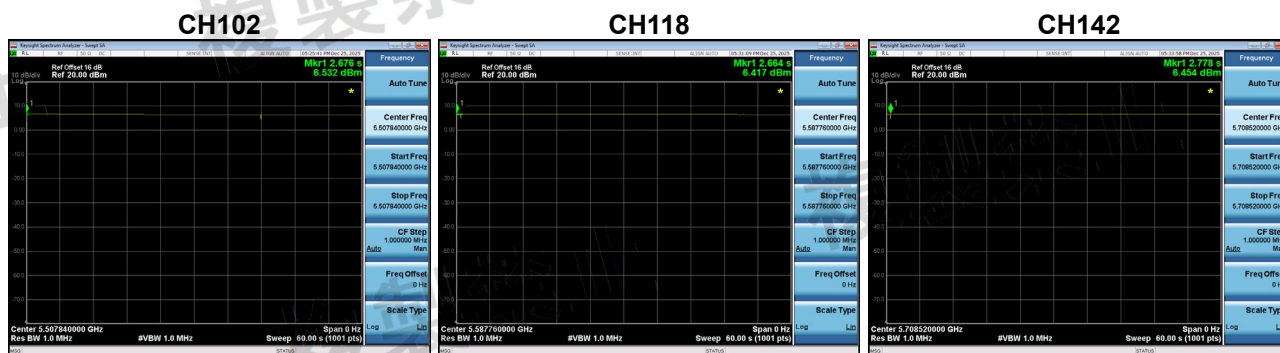


Test Mode: IEEE 802.11ax(HE20) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5500	5600	5720	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	7.4302	7.9947	8.3811	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	8.38			-
Antenna Power Tolerance (%)	-11.33	-4.60	+0.01	Limit + 50% ~ - 50%
EIRP (mW/MHz)	14.8252	15.9514	16.7225	Limit ≤ 50 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

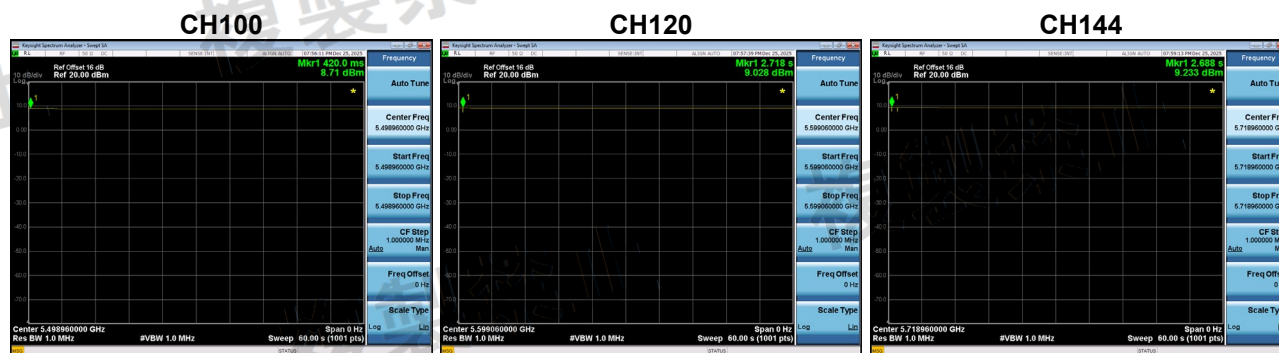


Test Mode: IEEE 802.11ax(HE40) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5510	5590	5710	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.3752	4.5394	4.7130	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.71			-
Antenna Power Tolerance (%)	-7.11	-3.62	+0.06	Limit + 50% ~ - 50%
EIRP (mW/MHz)	8.7297	9.0573	9.4037	Limit ≤ 25 mW/MHz (With TPC)

Note:


1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)

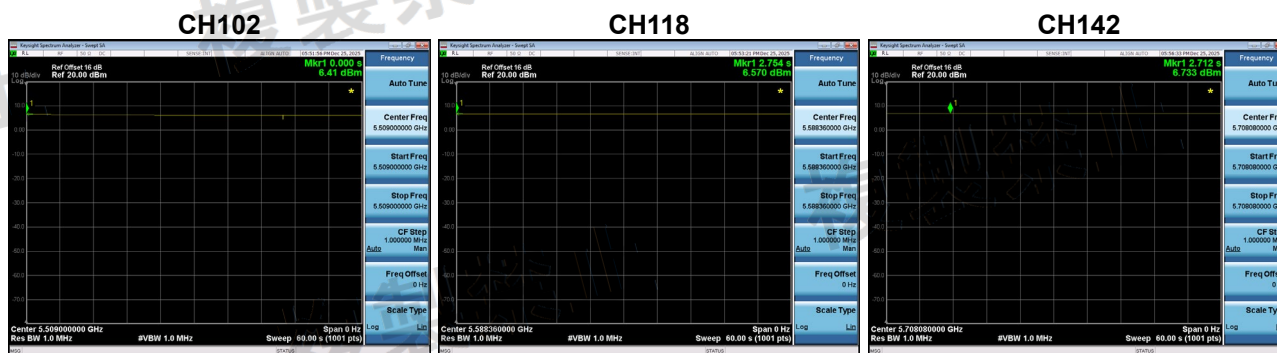


APPENDIX E - ADJACENT CHANNEL EMITTED POWER

Test Mode: IEEE 802.11a - W52


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	25.02	25.48	25.33	dB	Limit ≥ 25 dB
	+20	25.40	25.73	25.50	dB	Limit ≥ 25 dB
	-40	44.64	44.53	43.09	dB	Limit ≥ 40 dB
	+40	44.13	44.05	43.39	dB	Limit ≥ 40 dB

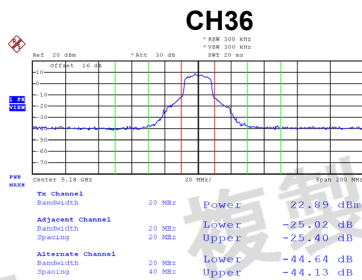

Date: 26.DEC.2025 14:32:16

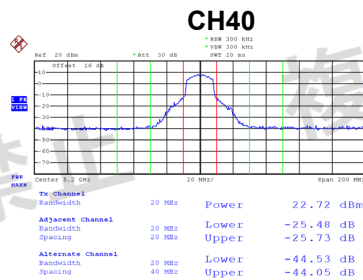


Date: 26.DEC.2025 14:35:59

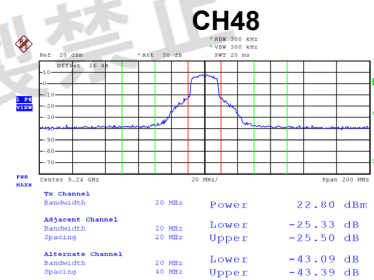


Date: 26.DEC.2025 14:40:01

Test Mode: IEEE 802.11ac(VHT20) - W52


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	25.18	25.12	25.49	dB	Limit ≥ 25 dB
	+20	25.31	25.33	25.32	dB	Limit ≥ 25 dB
	-40	44.47	44.43	42.84	dB	Limit ≥ 40 dB
	+40	43.64	44.08	43.13	dB	Limit ≥ 40 dB

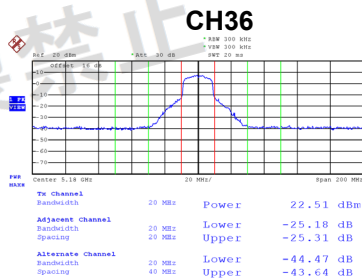

Date: 26.DEC.2025 15:06:56

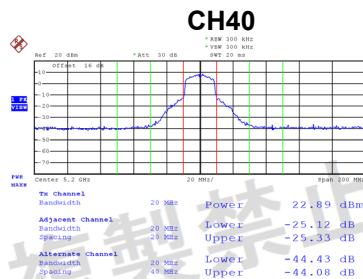

Date: 26.DEC.2025 15:18:57

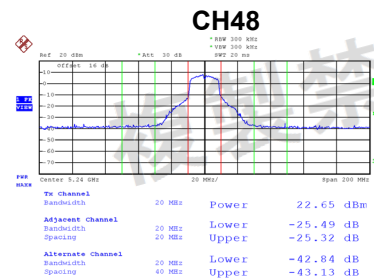


Date: 26.DEC.2025 15:32:42

Test Mode: IEEE 802.11ac(VHT40) - W52


Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5190	5230	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	25.36	25.12	dB	Limit $\geq$ 25 dB
	+40	26.32	25.83	dB	Limit $\geq$ 25 dB
	-80	41.37	41.84	dB	Limit $\geq$ 40 dB
	+80	41.21	41.69	dB	Limit $\geq$ 40 dB

CH38

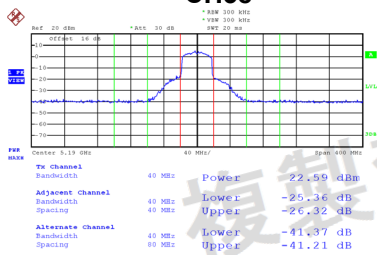

Date: 6,JAN,2026 16:02:17

CH46

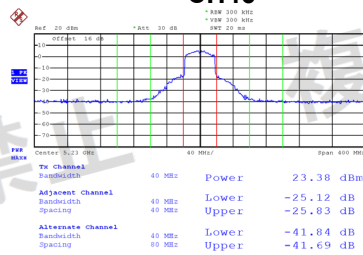


Date: 6,JAN,2026 16:03:12

Test Mode: IEEE 802.11ax(HE20) - W52


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	25.02	25.19	25.63	dB	Limit $\geq$ 25 dB
	+20	25.29	25.43	26.10	dB	Limit $\geq$ 25 dB
	-40	44.84	44.89	43.74	dB	Limit $\geq$ 40 dB
	+40	44.66	44.70	43.68	dB	Limit $\geq$ 40 dB

CH36

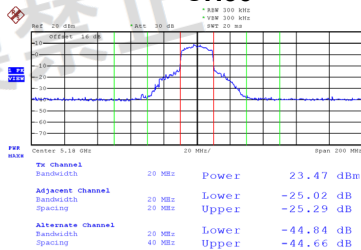


Date: 6,JAN,2026 15:48:47

CH40

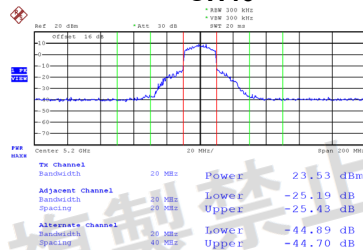

Date: 6,JAN,2026 15:50:50


CH48

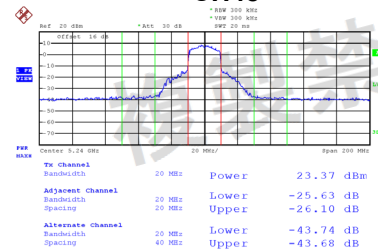


Date: 6,JAN,2026 15:53:02

Test Mode: IEEE 802.11ax(HE40) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5190	5230	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	26.00	25.80	dB	Limit ≥ 25 dB
	+40	26.22	25.98	dB	Limit ≥ 25 dB
	-80	42.18	42.17	dB	Limit ≥ 40 dB
	+80	41.88	42.47	dB	Limit ≥ 40 dB

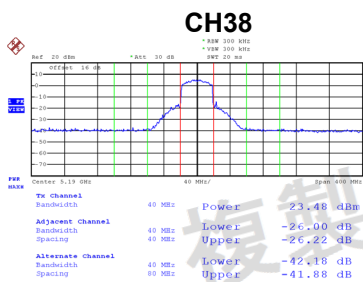


Date: 6,JAN,2026 16:12:36

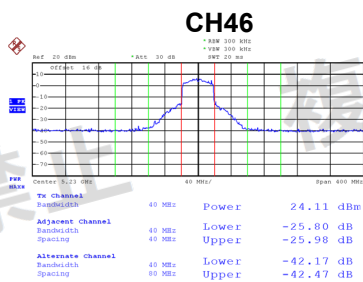


Date: 6,JAN,2026 16:14:39

Test Mode: IEEE 802.11a - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	25.16	25.25	25.62	dB	Limit ≥ 25 dB
	+20	25.97	25.26	25.92	dB	Limit ≥ 25 dB
	-40	43.15	43.44	43.35	dB	Limit ≥ 40 dB
	+40	43.62	43.95	43.81	dB	Limit ≥ 40 dB

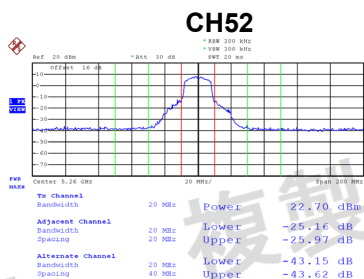

Date: 26.DEC.2025 14:42:27

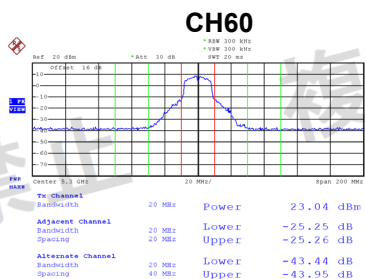


Date: 26.DEC.2025 14:46:11

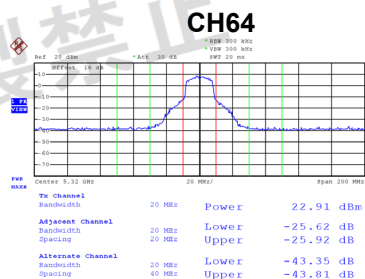


Date: 26.DEC.2025 14:48:13

Test Mode: IEEE 802.11ac(VHT20) - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	25.71	25.54	25.69	dB	Limit ≥ 25 dB
	+20	25.90	25.42	25.44	dB	Limit ≥ 25 dB
	-40	42.89	42.74	43.06	dB	Limit ≥ 40 dB
	+40	43.28	43.57	43.51	dB	Limit ≥ 40 dB

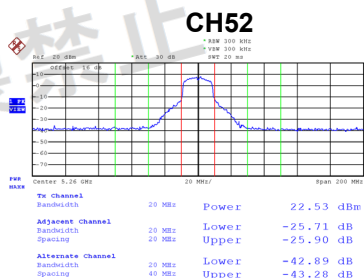

Date: 26.DEC.2025 15:39:10

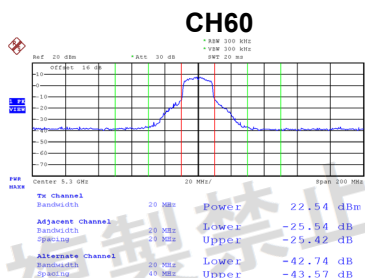

Date: 26.DEC.2025 15:38:19

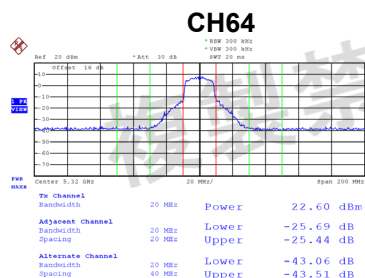


Date: 26.DEC.2025 15:40:55

Test Mode: IEEE 802.11ac(VHT40) - W53


Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	25.76	26.25	dB	Limit ≥ 25 dB
	+40	26.79	27.20	dB	Limit ≥ 25 dB
	-80	41.22	47.52	dB	Limit ≥ 40 dB
	+80	41.50	47.83	dB	Limit ≥ 40 dB

CH54

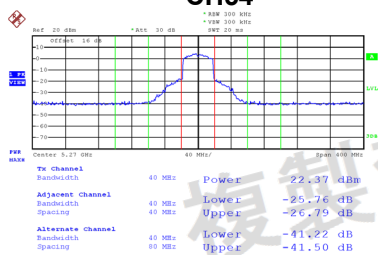

Date: 6,JAN,2026 16:04:31

CH62

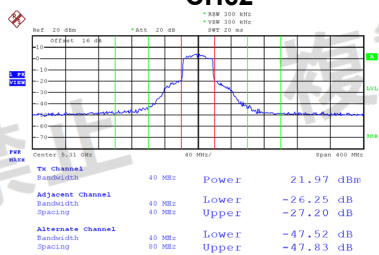


Date: 6,JAN,2026 16:07:07

Test Mode: IEEE 802.11ax(HE20) - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	25.71	25.20	25.09	dB	Limit ≥ 25 dB
	+20	25.93	25.10	25.29	dB	Limit ≥ 25 dB
	-40	43.55	43.50	43.94	dB	Limit ≥ 40 dB
	+40	44.39	44.55	44.40	dB	Limit ≥ 40 dB

CH52

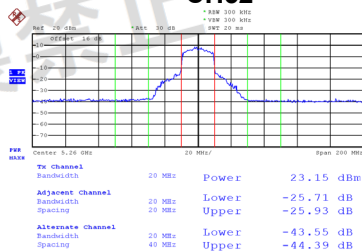


Date: 6,JAN,2026 15:53:45

CH60

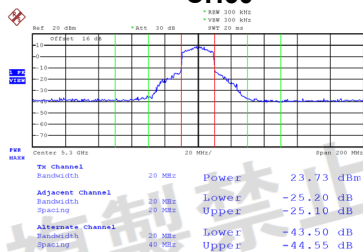

Date: 6,JAN,2026 15:55:01


CH64

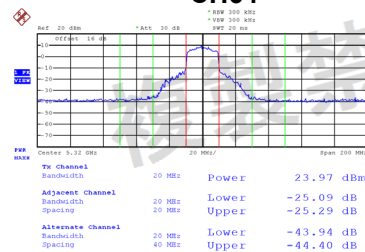


Date: 6,JAN,2026 15:56:35

Test Mode: IEEE 802.11ax(HE40) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	25.68	26.89	dB	Limit ≥ 25 dB
	+40	26.41	27.67	dB	Limit ≥ 25 dB
	-80	42.14	40.44	dB	Limit ≥ 40 dB
	+80	42.39	40.92	dB	Limit ≥ 40 dB

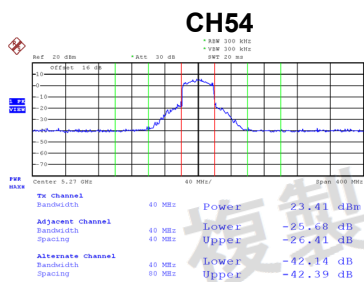


Date: 6.JAN.2026 16:15:24

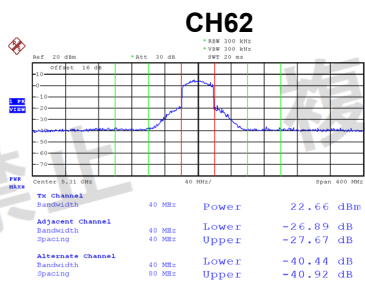


Date: 6.JAN.2026 16:15:54

Test Mode: IEEE 802.11a - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	25.87	25.16	25.68	dB	Limit ≥ 25 dB
	+20	25.51	25.52	25.29	dB	Limit ≥ 25 dB
	-40	43.74	44.37	43.20	dB	Limit ≥ 40 dB
	+40	44.47	43.75	43.60	dB	Limit ≥ 40 dB

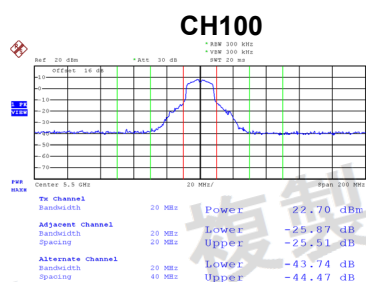

Date: 26.DEC.2025 14:55:16

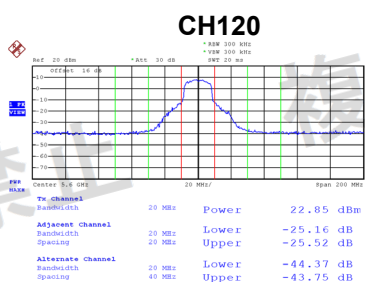


Date: 26.DEC.2025 14:59:37

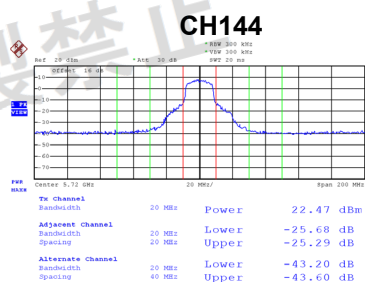


Date: 26.DEC.2025 15:03:58

Test Mode: IEEE 802.11ac(VHT20) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	25.33	25.30	25.30	dB	Limit ≥ 25 dB
	+20	25.10	25.60	25.25	dB	Limit ≥ 25 dB
	-40	43.40	44.02	43.06	dB	Limit ≥ 40 dB
	+40	44.22	43.62	43.51	dB	Limit ≥ 40 dB

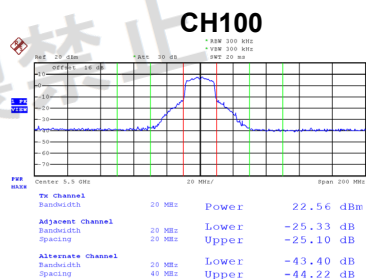

Date: 26.DEC.2025 15:14:29

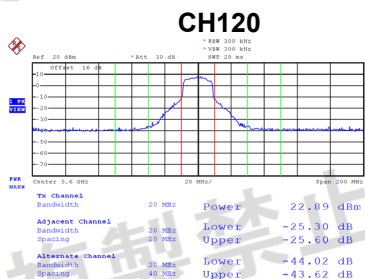


Date: 26.DEC.2025 15:52:06

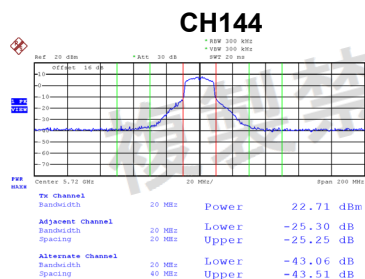


Date: 26.DEC.2025 15:59:45

Test Mode: IEEE 802.11ac(VHT40) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	25.65	25.28	26.41	dB	Limit ≥ 25 dB
	+40	25.69	25.53	26.44	dB	Limit ≥ 25 dB
	-80	40.19	41.14	40.05	dB	Limit ≥ 40 dB
	+80	40.80	40.92	40.29	dB	Limit ≥ 40 dB

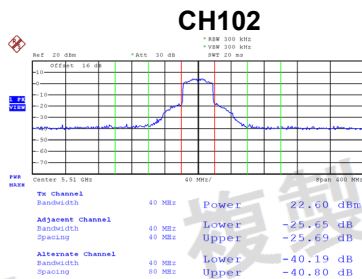

Date: 6.JAN.2026 16:08:19

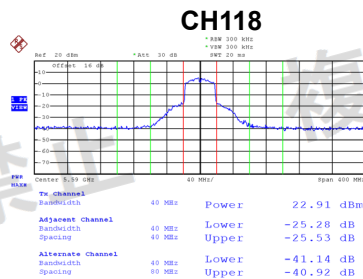


Date: 6.JAN.2026 16:09:13

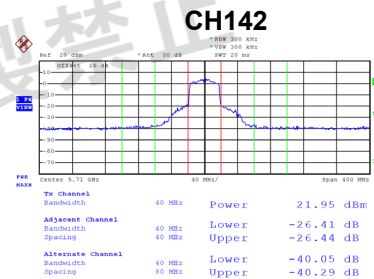


Date: 6.JAN.2026 16:10:56

Test Mode: IEEE 802.11ax(HE20) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	25.83	25.47	25.26	dB	Limit ≥ 25 dB
	+20	25.95	25.61	25.10	dB	Limit ≥ 25 dB
	-40	43.98	44.67	43.75	dB	Limit ≥ 40 dB
	+40	45.11	44.30	44.35	dB	Limit ≥ 40 dB

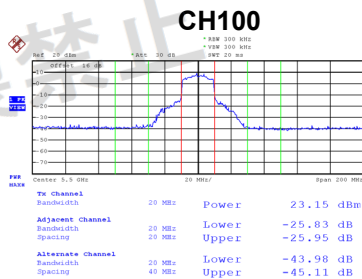

Date: 6.JAN.2026 15:58:39

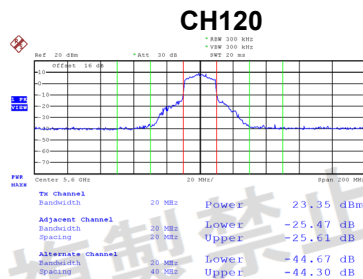

Date: 6.JAN.2026 15:59:10

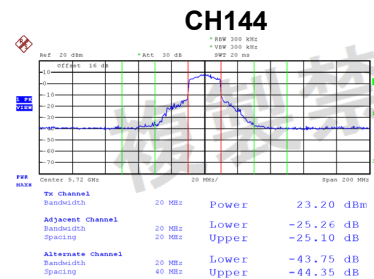


Date: 6.JAN.2026 16:00:18

Test Mode: IEEE 802.11ax(HE40) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	26.04	25.35	26.49	dB	Limit ≥ 25 dB
	+40	25.75	26.08	26.52	dB	Limit ≥ 25 dB
	-80	40.82	41.91	41.19	dB	Limit ≥ 40 dB
	+80	41.65	41.90	41.38	dB	Limit ≥ 40 dB

CH102

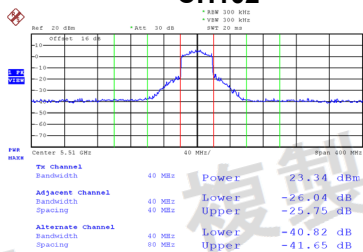


Date: 6.JAN.2026 16:16:30

CH118

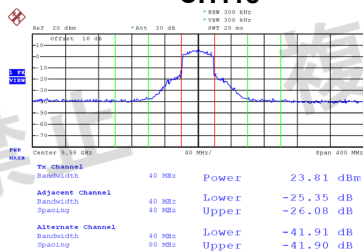

Date: 6.JAN.2026 16:17:07

CH142

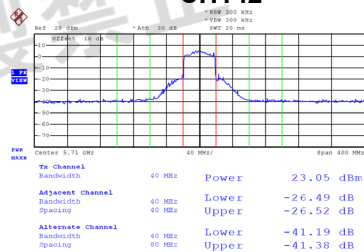

Date: 6.JAN.2026 16:17:59

APPENDIX F - LIMITATION OF COLLATERAL EMISSION OF RECEIVER