


|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 13:22 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1321 |                          |

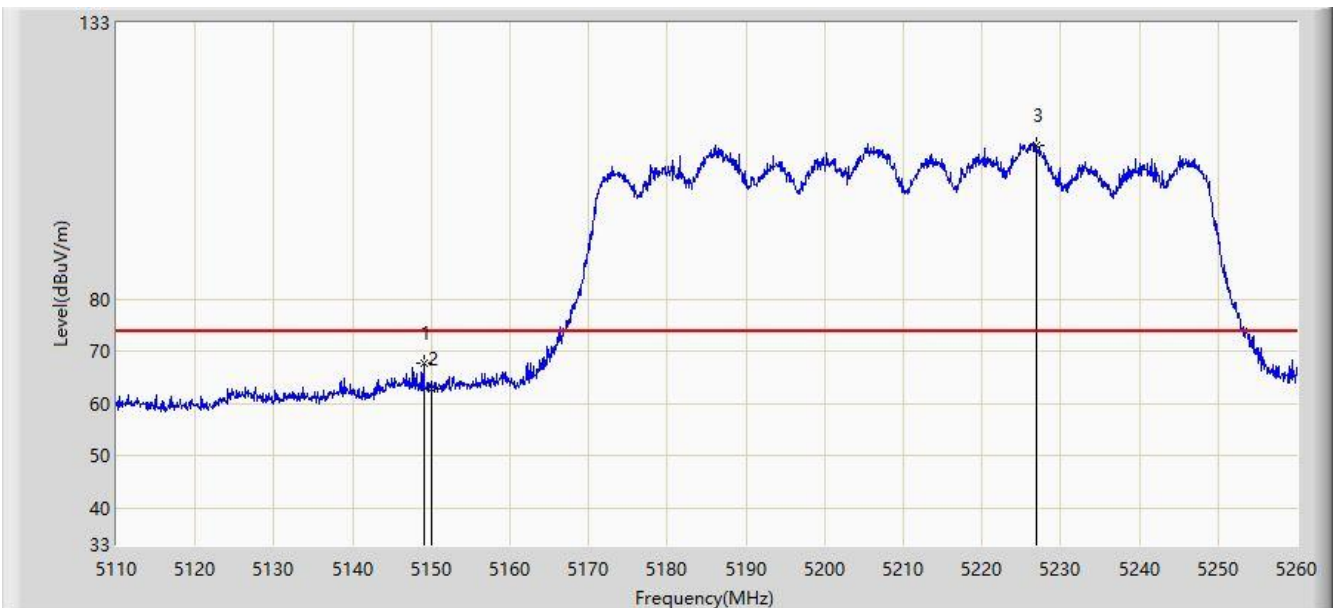

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.075        | 67.846                 | 64.200               | -6.154      | 74.000         | 3.646       | PK   |
| 2  |      |      | 5150.000        | 62.941                 | 59.295               | -11.059     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5226.850        | 109.627                | 105.931              | N/A         | N/A            | 3.696       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 13:25 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz with OAW-AP1321 |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5146.300        | 50.632                 | 46.988               | -3.368      | 54.000         | 3.644       | AV   |
| 2  |      |      | 5150.000        | 49.263                 | 45.617               | -4.737      | 54.000         | 3.646       | AV   |
| 3  |      | *    | 5226.550        | 96.869                 | 93.173               | N/A         | N/A            | 3.695       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 13:39 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1321 |                          |

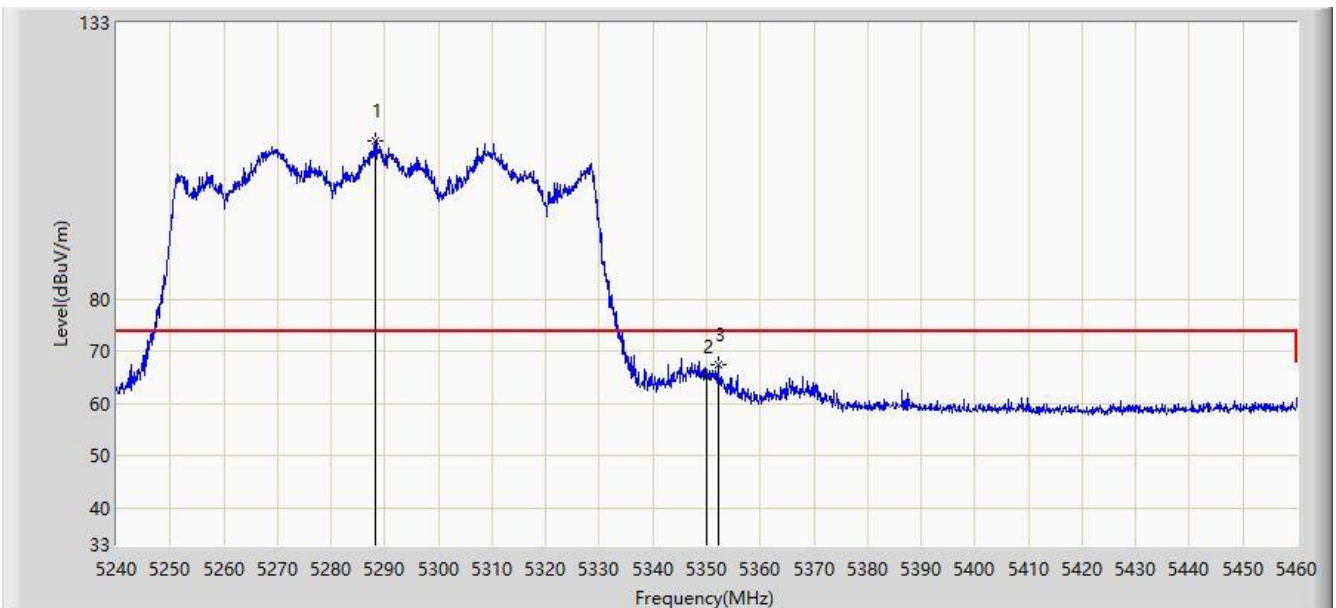


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5288.290        | 110.488                | 106.754              | N/A         | N/A            | 3.734       | PK   |
| 2  |      |      | 5350.000        | 65.104                 | 61.330               | -8.896      | 74.000         | 3.774       | PK   |
| 3  |      |      | 5352.200        | 67.610                 | 63.835               | -6.390      | 74.000         | 3.775       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 13:38 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1321 |                          |

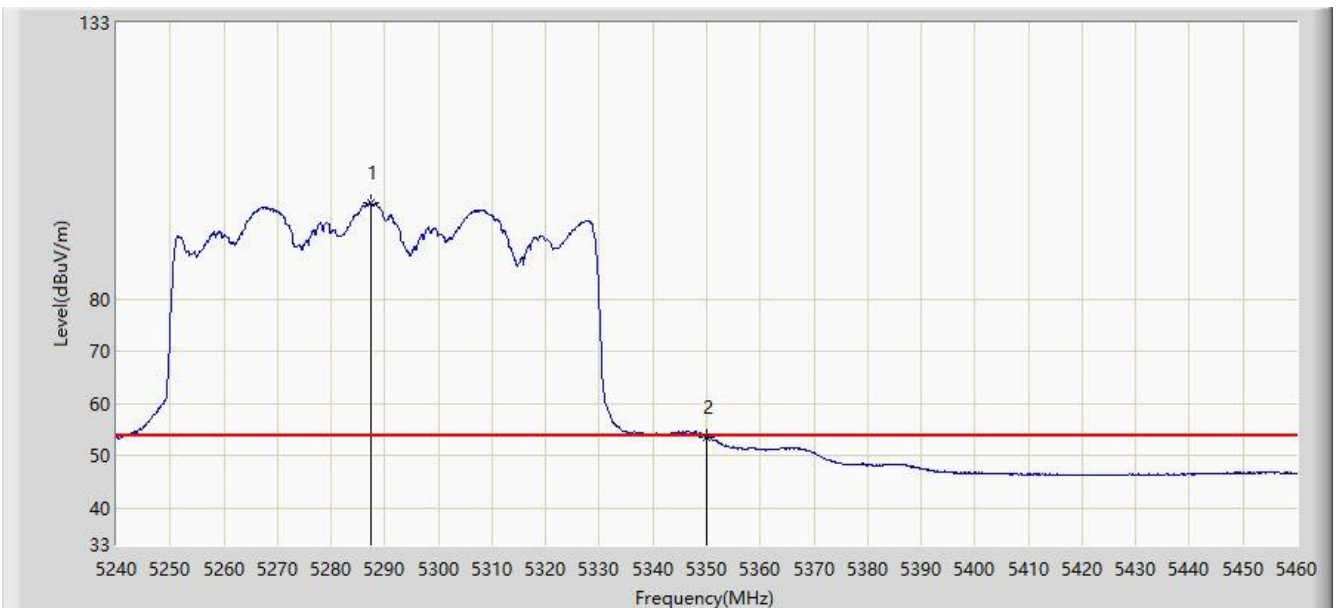


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5287.410        | 98.411                 | 94.677               | N/A         | N/A            | 3.733       | AV   |
| 2  |      |      | 5350.000        | 53.626                 | 49.852               | -0.374      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 13:41 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1321 |                          |

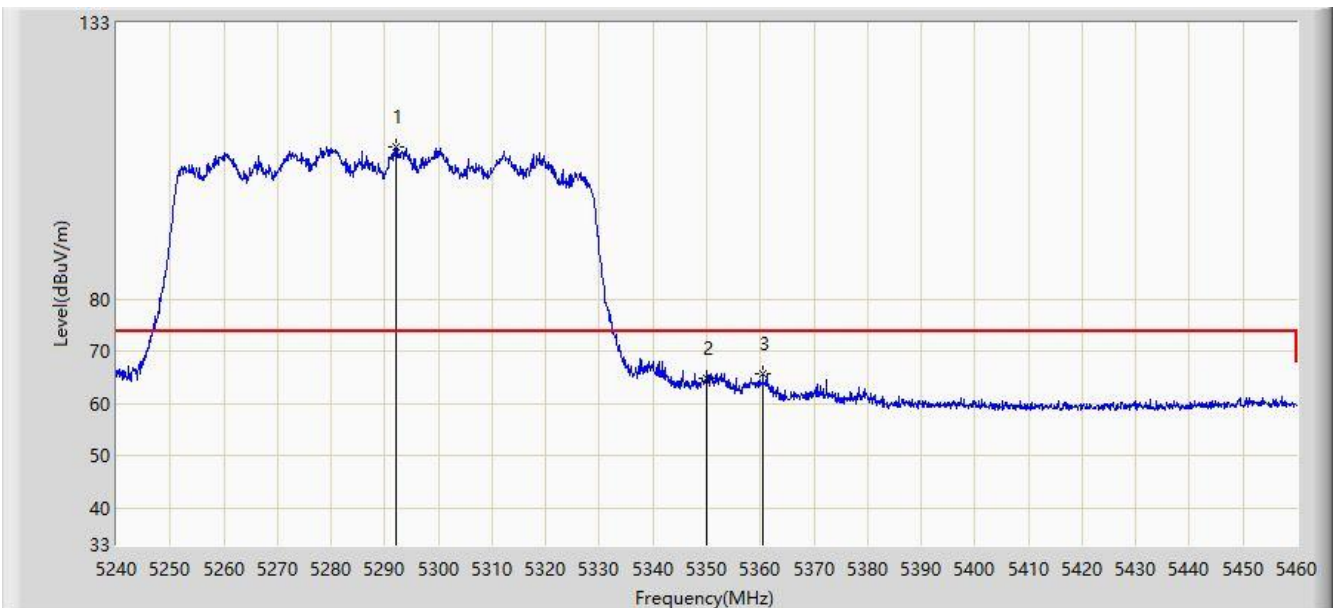


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5292.030        | 109.135                | 105.398              | N/A         | N/A            | 3.736       | PK   |
| 2  |      |      | 5350.000        | 64.879                 | 61.105               | -9.121      | 74.000         | 3.774       | PK   |
| 3  |      |      | 5360.450        | 65.816                 | 62.035               | -8.184      | 74.000         | 3.781       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 13:46 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz with OAW-AP1321 |                          |

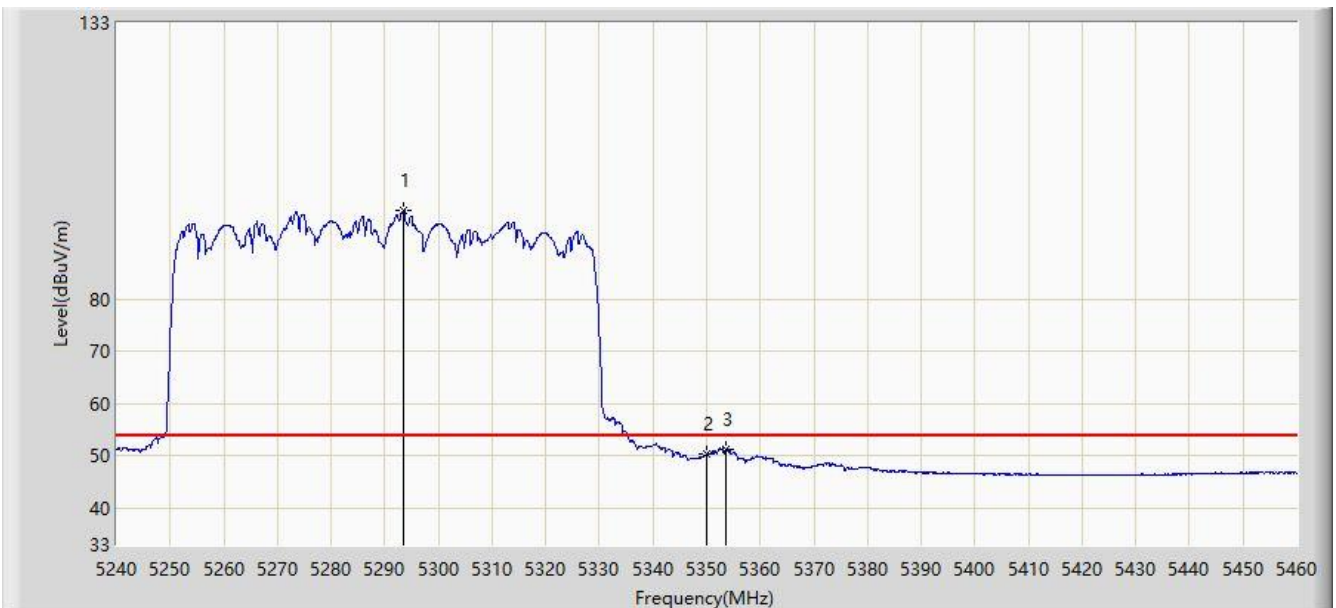


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5293.570        | 97.057                 | 93.319               | N/A         | N/A            | 3.737       | AV   |
| 2  |      |      | 5350.000        | 50.368                 | 46.594               | -3.632      | 54.000         | 3.774       | AV   |
| 3  |      |      | 5353.520        | 51.228                 | 47.452               | -2.772      | 54.000         | 3.776       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 13:49 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1321 |                          |

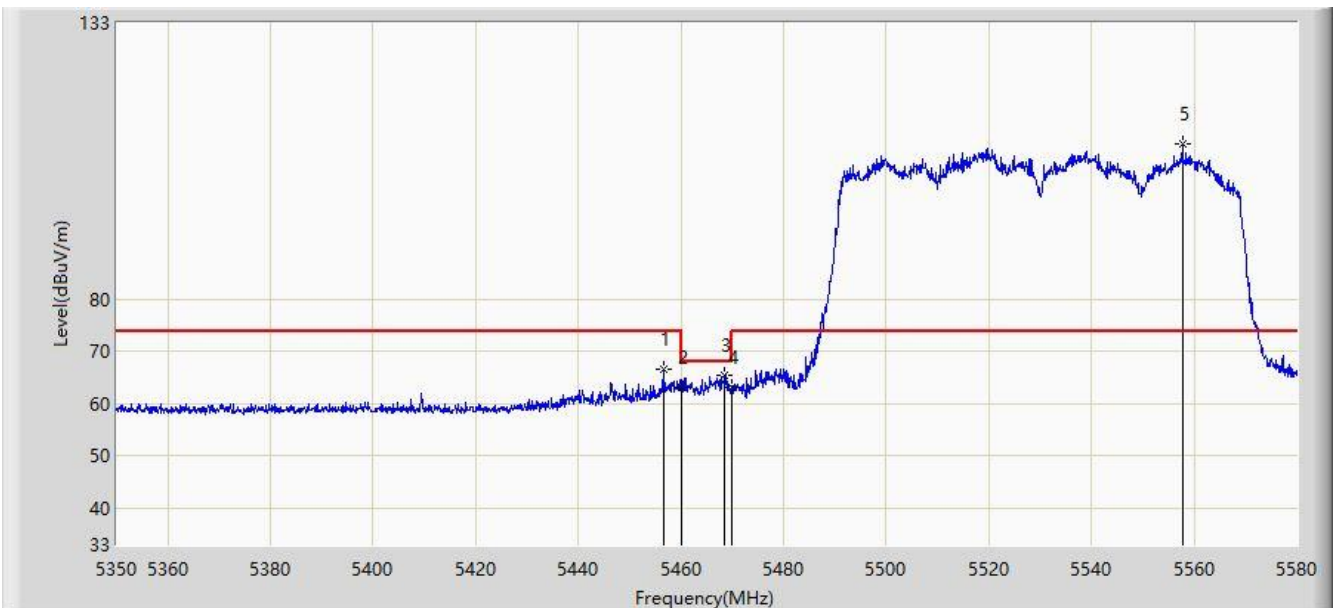


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5456.605        | 66.498                 | 62.656               | -7.502      | 74.000         | 3.842       | PK   |
| 2  |      |      | 5460.000        | 63.122                 | 59.278               | -10.878     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5468.450        | 65.581                 | 61.732               | -2.619      | 68.200         | 3.849       | PK   |
| 4  |      |      | 5470.000        | 63.243                 | 59.392               | -4.957      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5557.690        | 109.871                | 105.780              | N/A         | N/A            | 4.091       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 13:58 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1321 |                          |

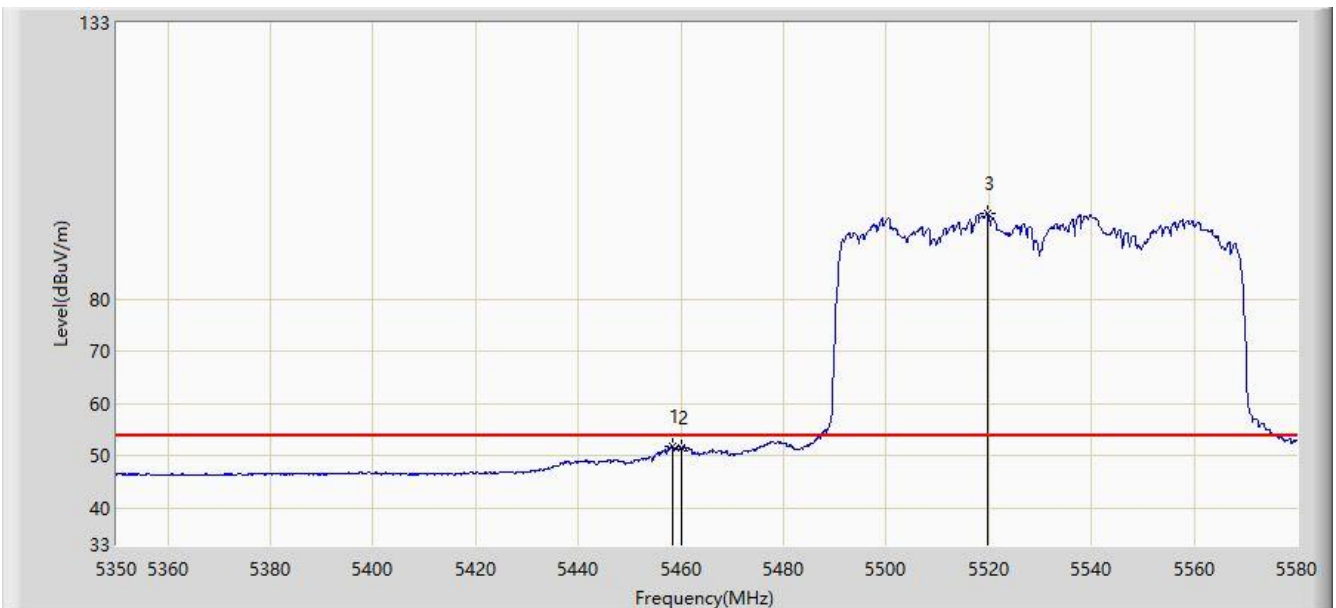


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5458.330        | 51.845                 | 48.002               | -2.155      | 54.000         | 3.843       | AV   |
| 2  |      |      | 5460.000        | 51.509                 | 47.665               | -2.491      | 54.000         | 3.844       | AV   |
| 3  |      | *    | 5519.740        | 96.591                 | 92.645               | N/A         | N/A            | 3.946       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 14:00 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1321 |                          |

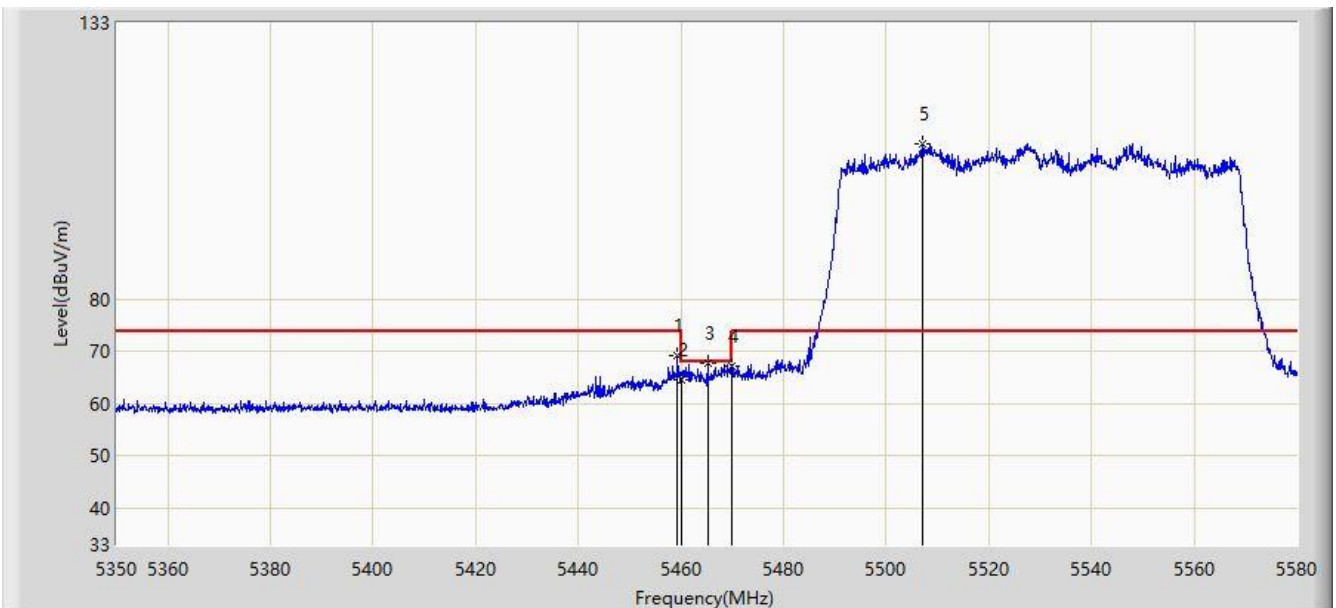


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5459.365        | 69.193                 | 65.349               | -4.807      | 74.000         | 3.843       | PK   |
| 2  |      |      | 5460.000        | 64.554                 | 60.710               | -9.446      | 74.000         | 3.844       | PK   |
| 3  |      |      | 5465.230        | 67.840                 | 63.993               | -0.360      | 68.200         | 3.847       | PK   |
| 4  |      |      | 5470.000        | 67.118                 | 63.267               | -1.082      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5507.090        | 109.889                | 105.991              | N/A         | N/A            | 3.897       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 14:02 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1321 |                          |

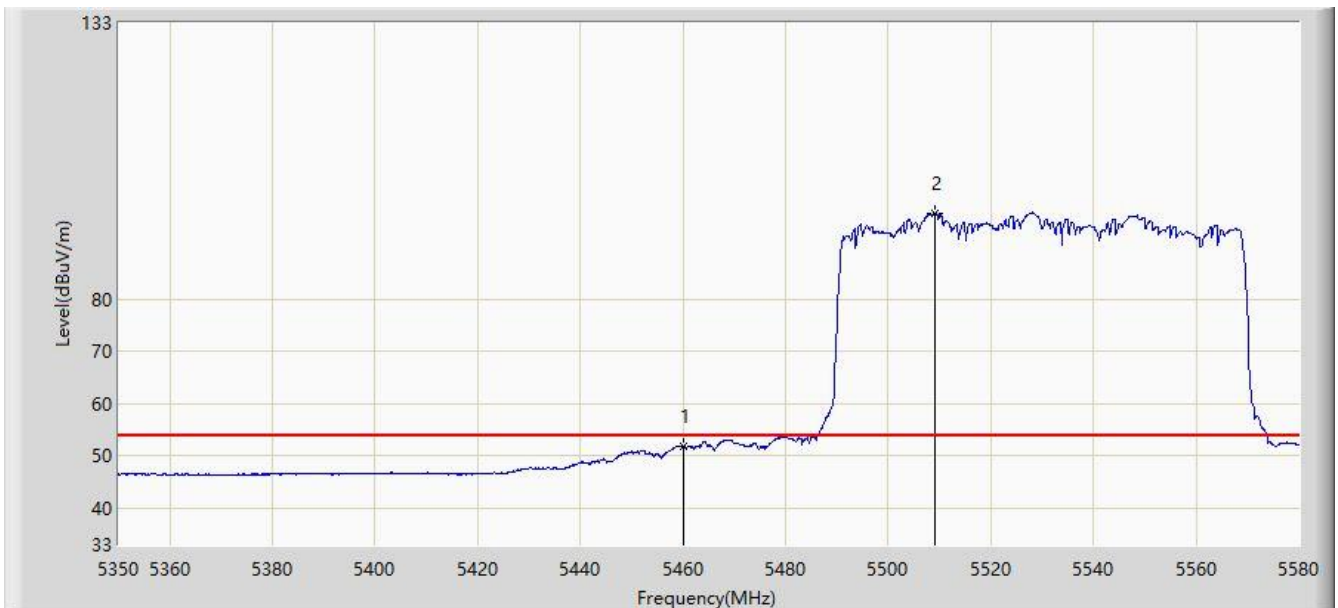


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 51.919                 | 48.075               | -2.081      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5509.160        | 96.555                 | 92.650               | N/A         | N/A            | 3.906       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 14:04 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz with OAW-AP1321 |                          |

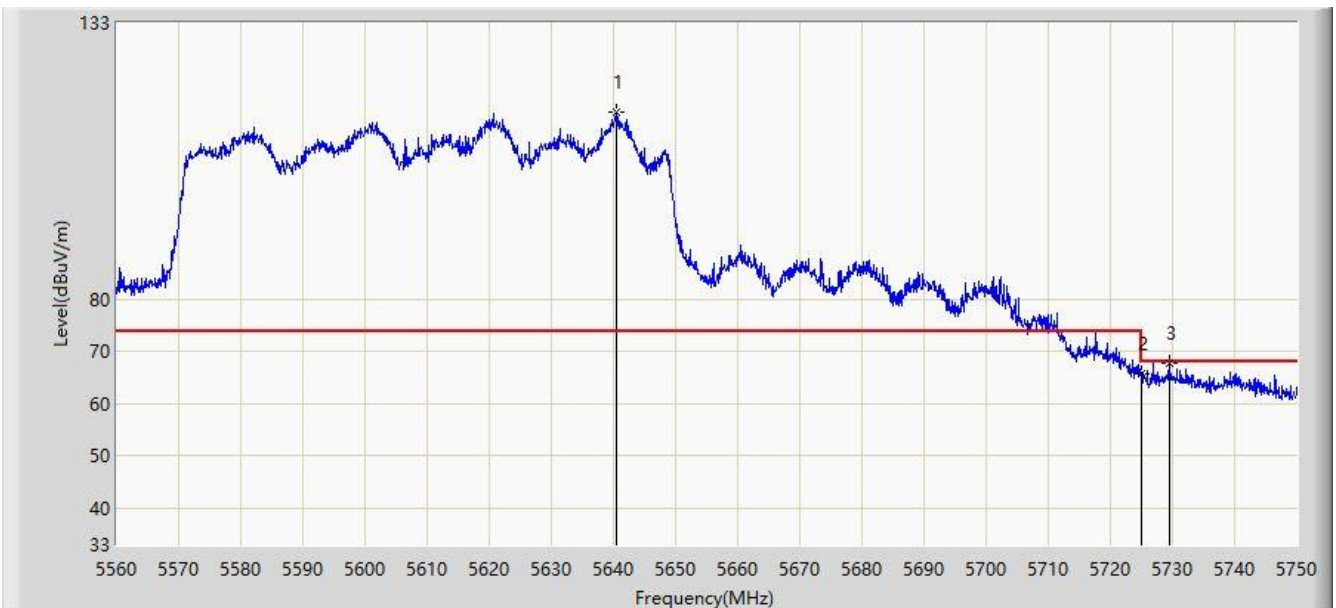


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5640.370        | 115.801                | 111.392              | N/A         | N/A            | 4.409       | PK   |
| 2  |      |      | 5725.000        | 65.823                 | 61.089               | -2.377      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5729.480        | 67.642                 | 62.891               | -0.558      | 68.200         | 4.751       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 14:07 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz with OAW-AP1321 |                          |

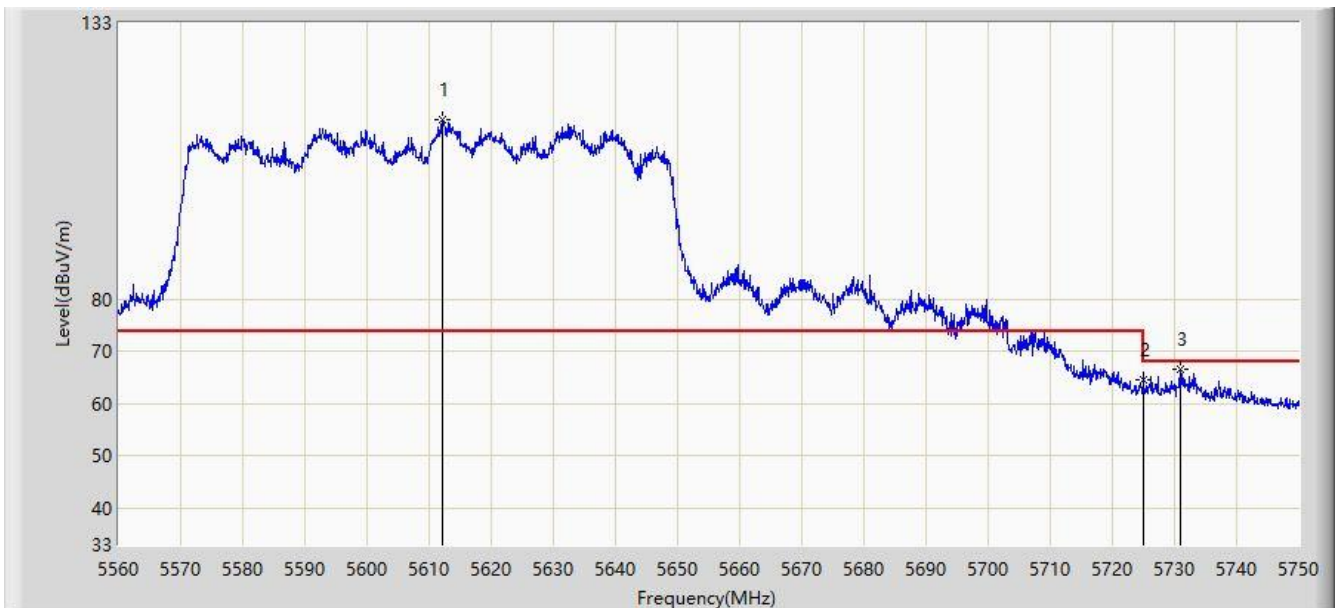


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5612.060        | 114.424                | 110.124              | N/A         | N/A            | 4.300       | PK   |
| 2  |      |      | 5725.000        | 64.684                 | 59.950               | -3.516      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5731.000        | 66.546                 | 61.789               | -1.654      | 68.200         | 4.757       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 14:13 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Horizontal     |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz with OAW-AP1321 |                          |

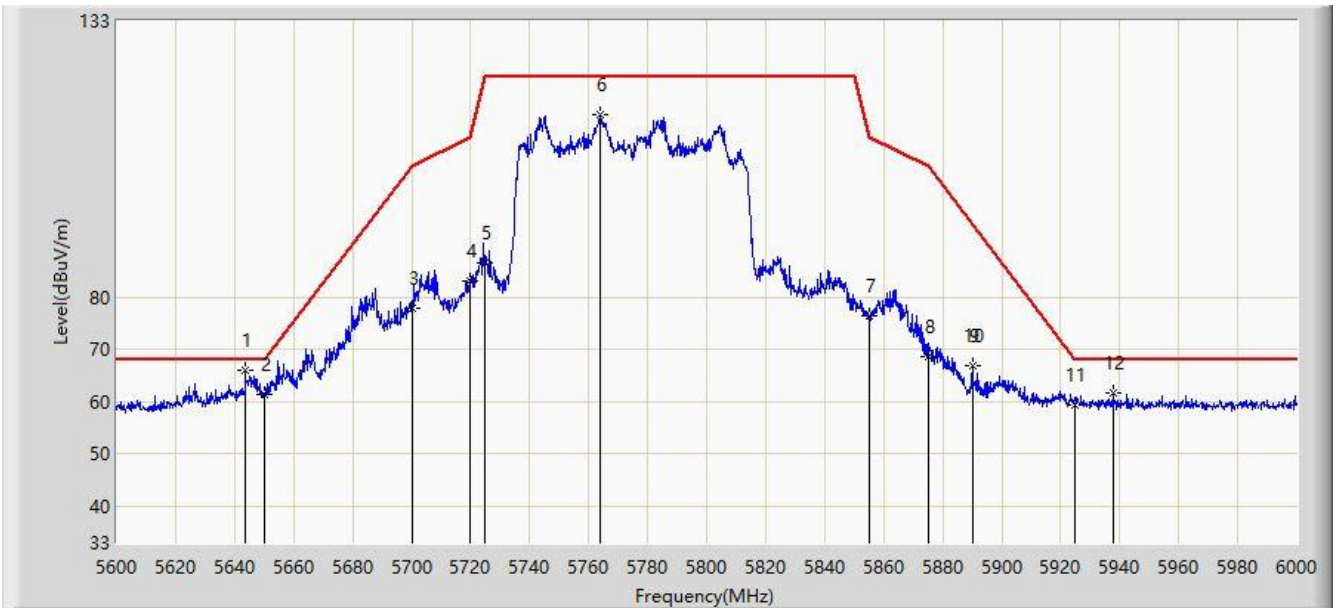


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5643.600        | 66.131                 | 61.709               | -2.069      | 68.200         | 4.422       | PK   |
| 2  |      |      | 5650.000        | 61.363                 | 56.917               | -6.837      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 77.872                 | 73.234               | -27.328     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 83.054                 | 78.339               | -27.746     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 86.633                 | 81.899               | -35.567     | 122.200        | 4.734       | PK   |
| 6  |      |      | 5764.000        | 115.017                | 110.133              | N/A         | N/A            | 4.884       | PK   |
| 7  |      |      | 5855.000        | 76.394                 | 71.161               | -34.406     | 110.800        | 5.233       | PK   |
| 8  |      |      | 5875.000        | 68.646                 | 63.336               | -36.554     | 105.200        | 5.310       | PK   |
| 9  |      |      | 5890.000        | 66.885                 | 61.518               | -27.182     | 94.067         | 5.367       | PK   |
| 10 |      |      | 5890.000        | 66.885                 | 61.518               | -27.182     | 94.067         | 5.367       | PK   |
| 11 |      |      | 5925.000        | 59.453                 | 53.951               | -8.747      | 68.200         | 5.502       | PK   |
| 12 |      |      | 5937.600        | 61.567                 | 56.016               | -6.633      | 68.200         | 5.551       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                         |                          |
|-------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                               | Time: 2020/04/02 - 14:17 |
| Limit: NCC LP0002_1GHz-40GHz                                            | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                          | Polarity: Vertical       |
| EUT: 無線基地台                                                              | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz with OAW-AP1321 |                          |

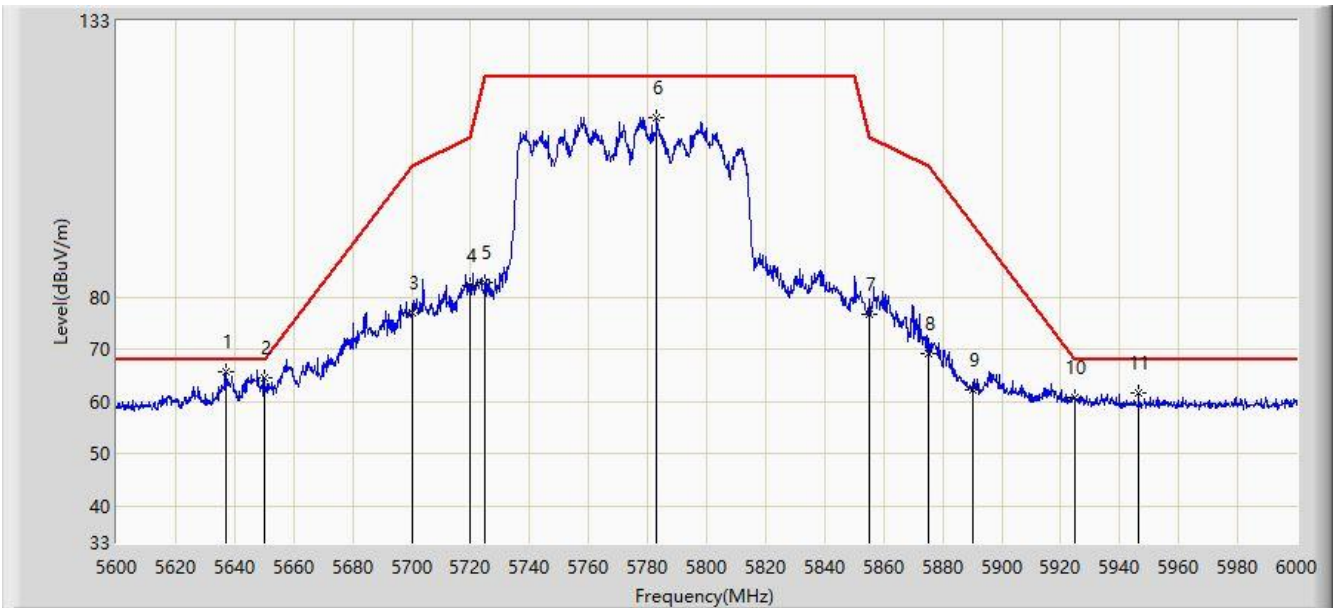


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5637.000        | 65.855                 | 61.459               | -2.345      | 68.200         | 4.396       | PK   |
| 2  |      |      | 5650.000        | 64.471                 | 60.025               | -3.729      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 76.936                 | 72.298               | -28.264     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 82.358                 | 77.643               | -28.442     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 82.855                 | 78.121               | -39.345     | 122.200        | 4.734       | PK   |
| 6  |      |      | 5783.200        | 114.520                | 109.562              | N/A         | N/A            | 4.958       | PK   |
| 7  |      |      | 5855.000        | 76.752                 | 71.519               | -34.048     | 110.800        | 5.233       | PK   |
| 8  |      |      | 5875.000        | 69.107                 | 63.797               | -36.093     | 105.200        | 5.310       | PK   |
| 9  |      |      | 5890.000        | 62.324                 | 56.957               | -31.743     | 94.067         | 5.367       | PK   |
| 10 |      |      | 5925.000        | 60.878                 | 55.376               | -7.322      | 68.200         | 5.502       | PK   |
| 11 |      |      | 5946.400        | 61.583                 | 55.998               | -6.617      | 68.200         | 5.584       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                      |                          |
|--------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                            | Time: 2020/04/08 - 15:34 |
| Limit: NCC LP0002_1GHz-40GHz                                                         | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                       | Polarity: Horizontal     |
| EUT: 無線基地台                                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5210MHz + 5290MHz with OAW-AP1321 |                          |

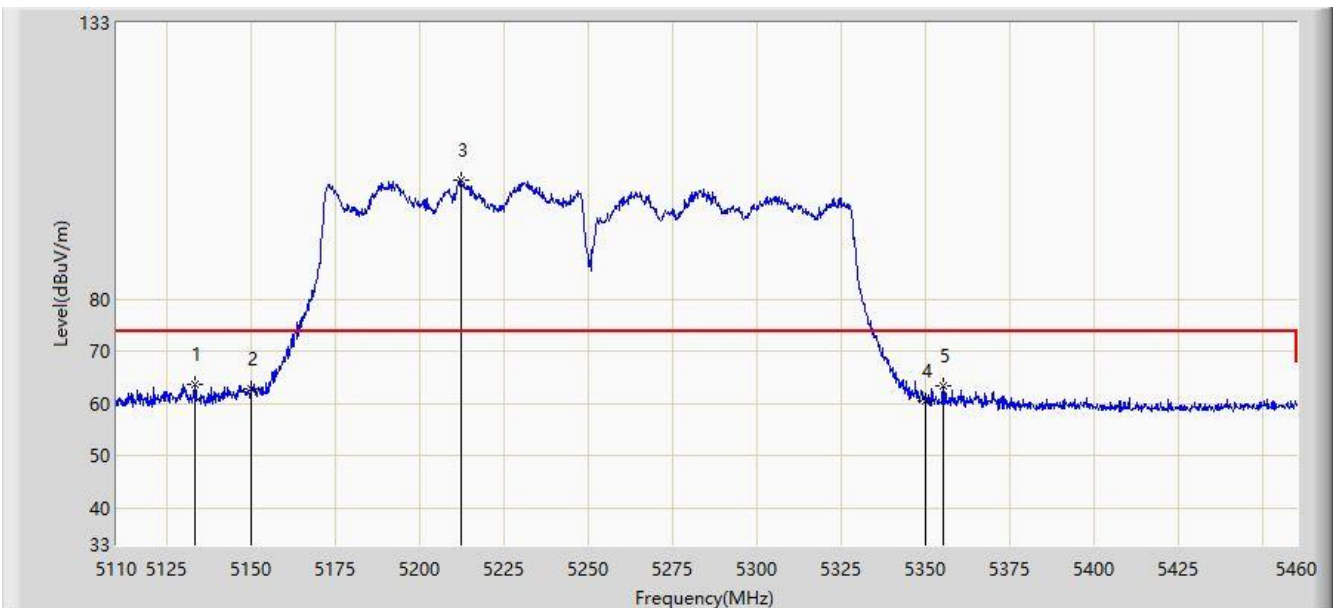


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5133.100        | 63.682                 | 60.047               | -10.318     | 74.000         | 3.635       | PK   |
| 2  |      |      | 5150.000        | 62.803                 | 59.157               | -11.197     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5212.375        | 102.949                | 99.263               | N/A         | N/A            | 3.687       | PK   |
| 4  |      |      | 5350.000        | 60.582                 | 56.808               | -13.418     | 74.000         | 3.774       | PK   |
| 5  |      |      | 5355.000        | 63.543                 | 59.766               | -10.457     | 74.000         | 3.777       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                      |                          |
|--------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                            | Time: 2020/04/08 - 16:16 |
| Limit: NCC LP0002_1GHz-40GHz                                                         | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                       | Polarity: Horizontal     |
| EUT: 無線基地台                                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5210MHz + 5290MHz with OAW-AP1321 |                          |

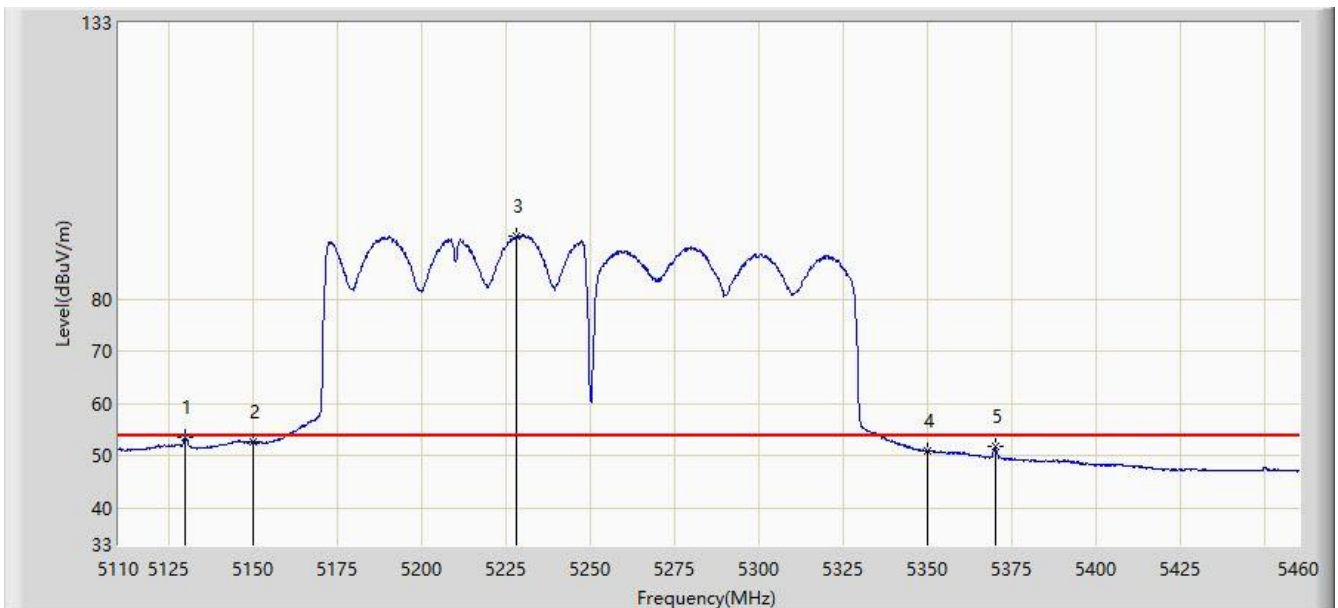


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5129.950        | 53.529                 | 49.896               | -0.471      | 54.000         | 3.633       | AV   |
| 2  |      |      | 5150.000        | 52.613                 | 48.967               | -1.387      | 54.000         | 3.646       | AV   |
| 3  |      | *    | 5228.125        | 92.201                 | 88.504               | N/A         | N/A            | 3.697       | AV   |
| 4  |      |      | 5350.000        | 50.913                 | 47.139               | -3.087      | 54.000         | 3.774       | AV   |
| 5  |      |      | 5370.050        | 51.806                 | 48.019               | -2.194      | 54.000         | 3.787       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                      |                          |
|--------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                            | Time: 2020/04/08 - 16:32 |
| Limit: NCC LP0002_1GHz-40GHz                                                         | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                       | Polarity: Vertical       |
| EUT: 無線基地台                                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5210MHz + 5290MHz with OAW-AP1321 |                          |

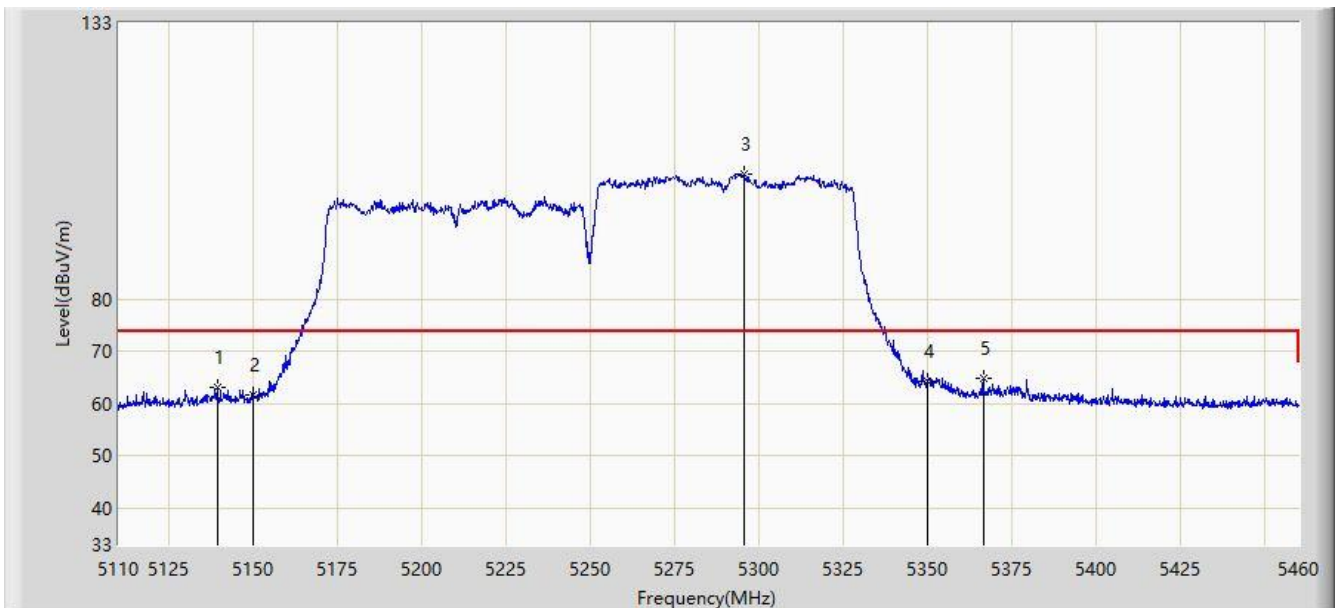


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5139.225        | 63.023                 | 59.384               | -10.977     | 74.000         | 3.640       | PK   |
| 2  |      |      | 5150.000        | 61.594                 | 57.948               | -12.406     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5295.325        | 104.052                | 100.313              | N/A         | N/A            | 3.739       | PK   |
| 4  |      |      | 5350.000        | 64.174                 | 60.400               | -9.826      | 74.000         | 3.774       | PK   |
| 5  |      |      | 5366.550        | 65.003                 | 61.218               | -8.997      | 74.000         | 3.785       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                      |                          |
|--------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                            | Time: 2020/04/08 - 16:38 |
| Limit: NCC LP0002_1GHz-40GHz                                                         | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                       | Polarity: Vertical       |
| EUT: 無線基地台                                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5210MHz + 5290MHz with OAW-AP1321 |                          |

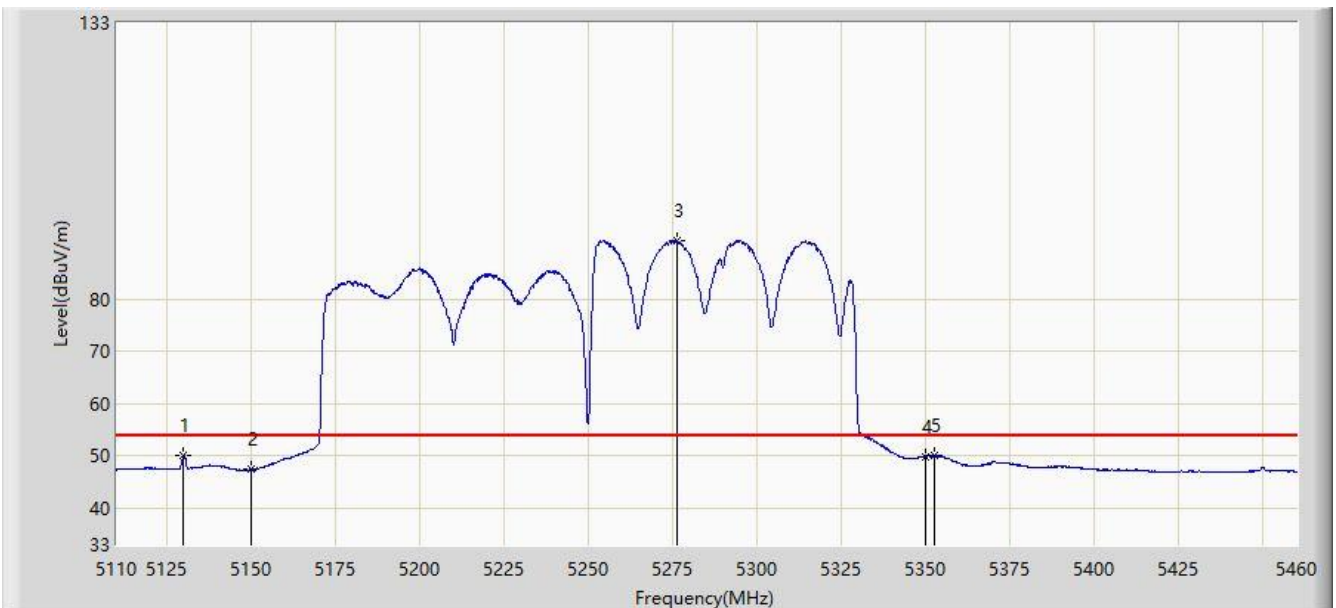


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5129.950        | 50.096                 | 46.463               | -3.904      | 54.000         | 3.633       | AV   |
| 2  |      |      | 5150.000        | 47.386                 | 43.740               | -6.614      | 54.000         | 3.646       | AV   |
| 3  |      | *    | 5276.425        | 91.289                 | 87.563               | N/A         | N/A            | 3.727       | AV   |
| 4  |      |      | 5350.000        | 49.948                 | 46.174               | -4.052      | 54.000         | 3.774       | AV   |
| 5  |      |      | 5352.550        | 50.115                 | 46.340               | -3.885      | 54.000         | 3.775       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                      |                          |
|--------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                            | Time: 2020/04/08 - 16:44 |
| Limit: NCC LP0002_1GHz-40GHz                                                         | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                       | Polarity: Horizontal     |
| EUT: 無線基地台                                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5530MHz + 5610MHz with OAW-AP1321 |                          |

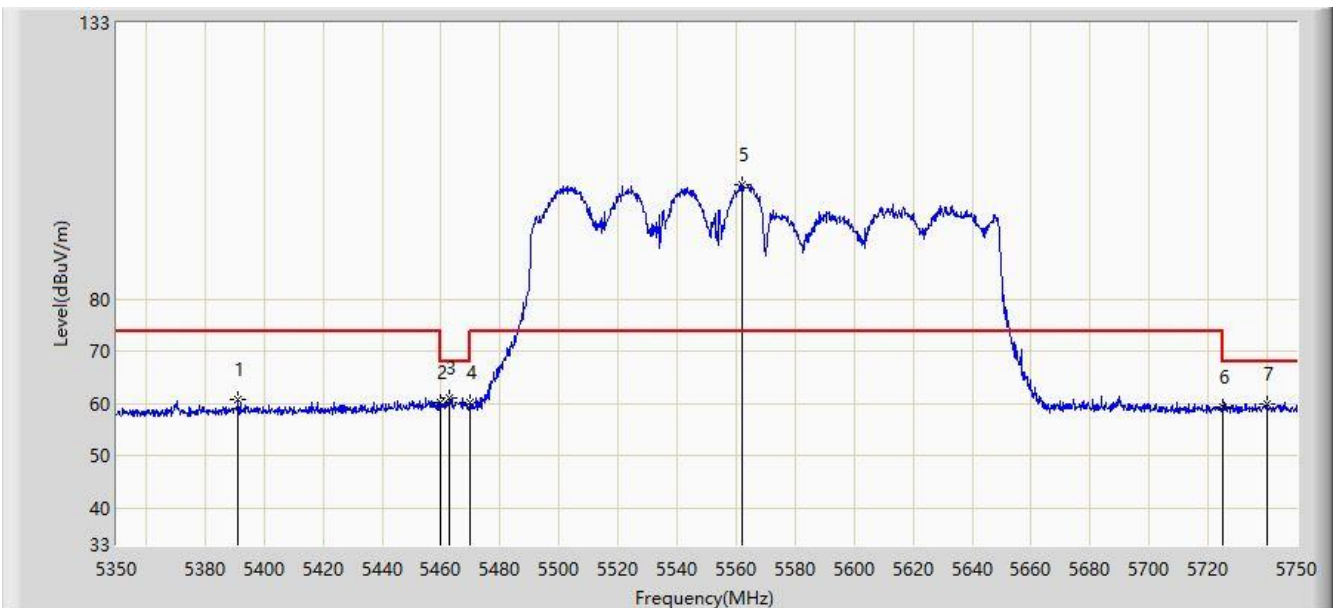


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5391.200        | 60.855                 | 57.054               | -13.145     | 74.000         | 3.801       | PK   |
| 2  |      |      | 5460.000        | 60.316                 | 56.472               | -13.684     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5462.800        | 61.123                 | 57.277               | -7.077      | 68.200         | 3.846       | PK   |
| 4  |      |      | 5470.000        | 60.120                 | 56.269               | -8.080      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5562.200        | 102.113                | 98.004               | N/A         | N/A            | 4.109       | PK   |
| 6  |      |      | 5725.000        | 59.322                 | 54.588               | -8.878      | 68.200         | 4.734       | PK   |
| 7  |      |      | 5740.000        | 60.087                 | 55.296               | -8.113      | 68.200         | 4.791       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                      |                          |
|--------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                            | Time: 2020/04/08 - 17:04 |
| Limit: NCC LP0002_1GHz-40GHz                                                         | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                       | Polarity: Horizontal     |
| EUT: 無線基地台                                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5530MHz + 5610MHz with OAW-AP1321 |                          |

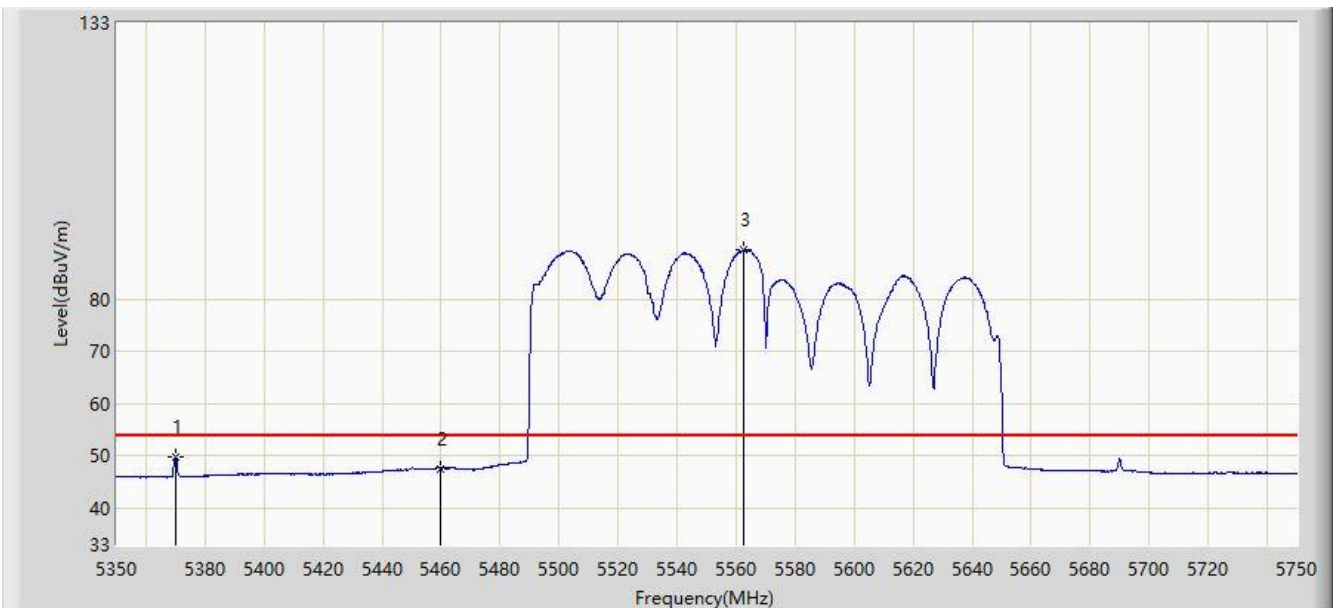


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5369.800        | 49.813                 | 46.026               | -4.187      | 54.000         | 3.787       | AV   |
| 2  |      |      | 5460.000        | 47.630                 | 43.786               | -6.370      | 54.000         | 3.844       | AV   |
| 3  |      | *    | 5562.600        | 89.554                 | 85.444               | N/A         | N/A            | 4.110       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                      |                          |
|--------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                            | Time: 2020/04/08 - 17:38 |
| Limit: NCC LP0002_1GHz-40GHz                                                         | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                       | Polarity: Vertical       |
| EUT: 無線基地台                                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5530MHz + 5610MHz with OAW-AP1321 |                          |

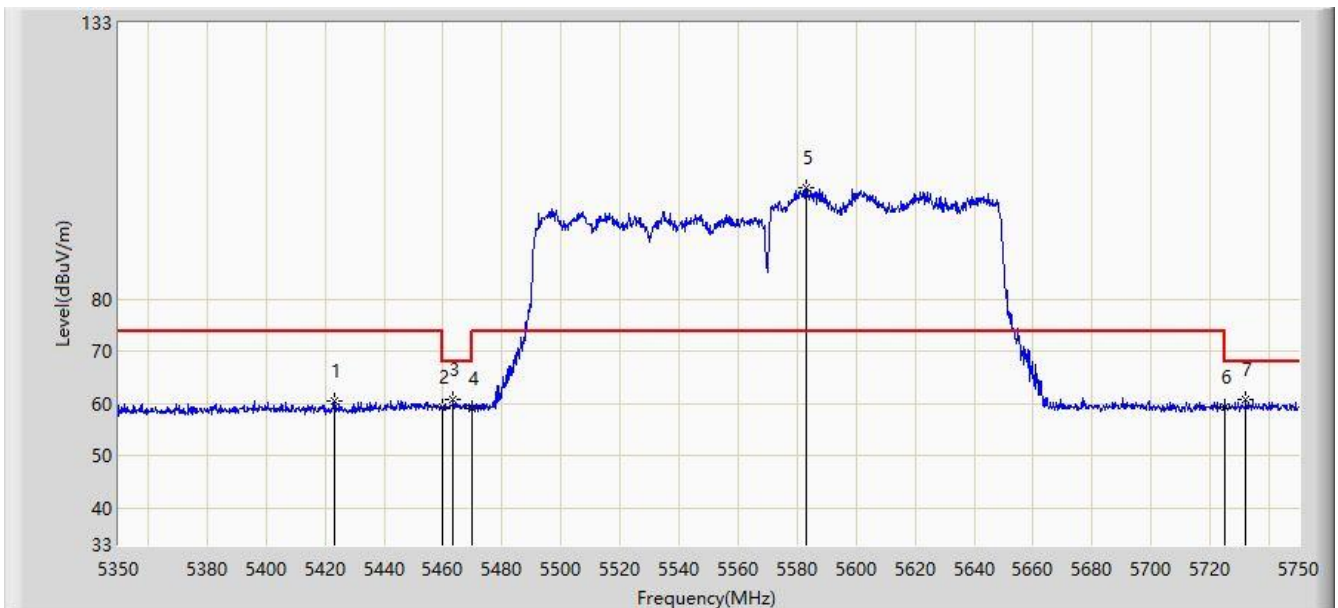


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5423.000        | 60.593                 | 56.773               | -13.407     | 74.000         | 3.821       | PK   |
| 2  |      |      | 5460.000        | 59.517                 | 55.673               | -14.483     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5463.400        | 60.711                 | 56.865               | -7.489      | 68.200         | 3.846       | PK   |
| 4  |      |      | 5470.000        | 59.157                 | 55.306               | -9.043      | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5583.000        | 101.393                | 97.205               | N/A         | N/A            | 4.188       | PK   |
| 6  |      |      | 5725.000        | 59.256                 | 54.522               | -8.944      | 68.200         | 4.734       | PK   |
| 7  |      |      | 5732.000        | 60.937                 | 56.176               | -7.263      | 68.200         | 4.761       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                      |                          |
|--------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                            | Time: 2020/04/08 - 17:42 |
| Limit: NCC LP0002_1GHz-40GHz                                                         | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                       | Polarity: Vertical       |
| EUT: 無線基地台                                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5530MHz + 5610MHz with OAW-AP1321 |                          |

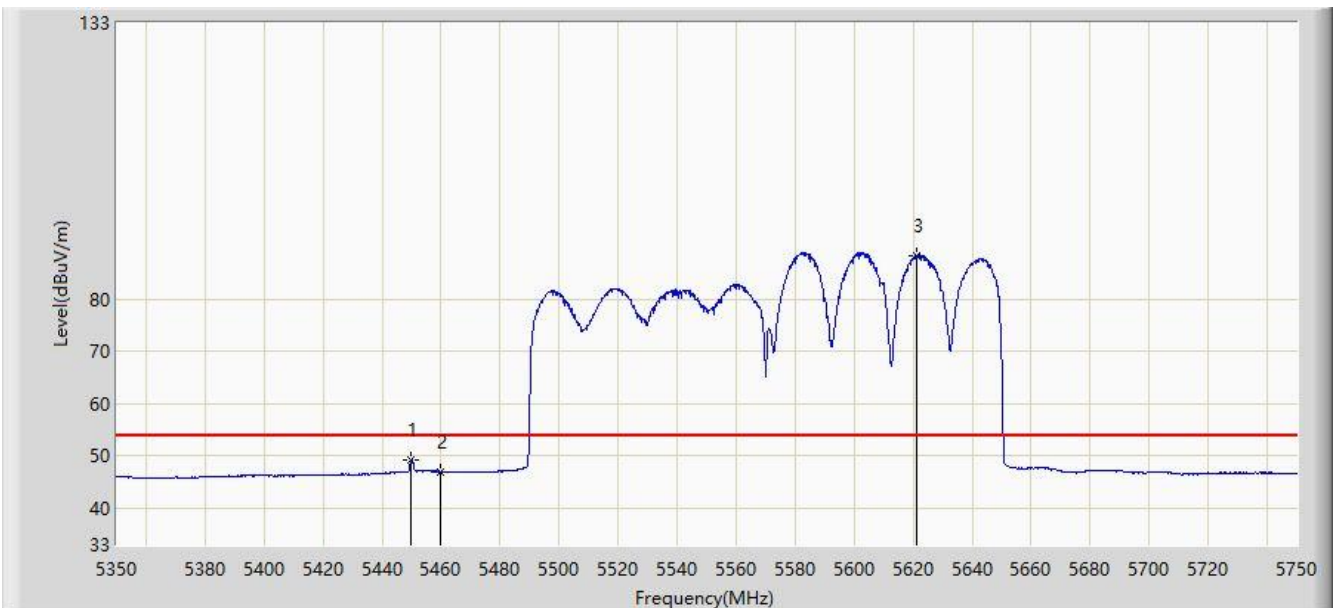


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5449.800        | 49.208                 | 45.371               | -4.792      | 54.000         | 3.837       | AV   |
| 2  |      |      | 5460.000        | 47.038                 | 43.194               | -6.962      | 54.000         | 3.844       | AV   |
| 3  |      | *    | 5621.400        | 88.478                 | 84.142               | N/A         | N/A            | 4.336       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

## 無線基地台-OAW-AP1321-Scan Antenna

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2020/04/13 - 14:48 |
| Limit: NCC LP0002_1GHz-40GHz                                                   | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                 | Polarity: Horizontal     |
| EUT: 無線基地台                                                                     | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1321-Scan Antenna |                          |

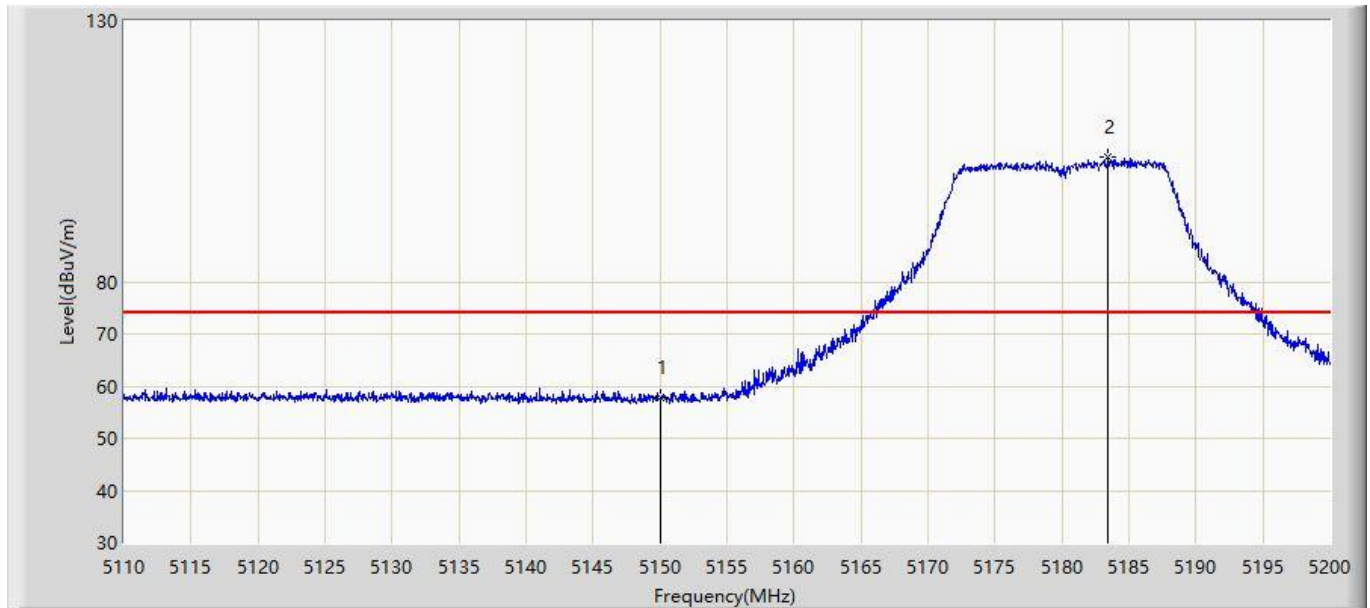


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 57.860                 | 54.214               | -16.140     | 74.000         | 3.646       | PK   |
| 2  |      | *    | 5183.440        | 103.792                | 100.125              | N/A         | N/A            | 3.667       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2020/04/13 - 16:10 |
| Limit: NCC LP0002_1GHz-40GHz                                                   | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                 | Polarity: Horizontal     |
| EUT: 無線基地台                                                                     | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1321-Scan Antenna |                          |

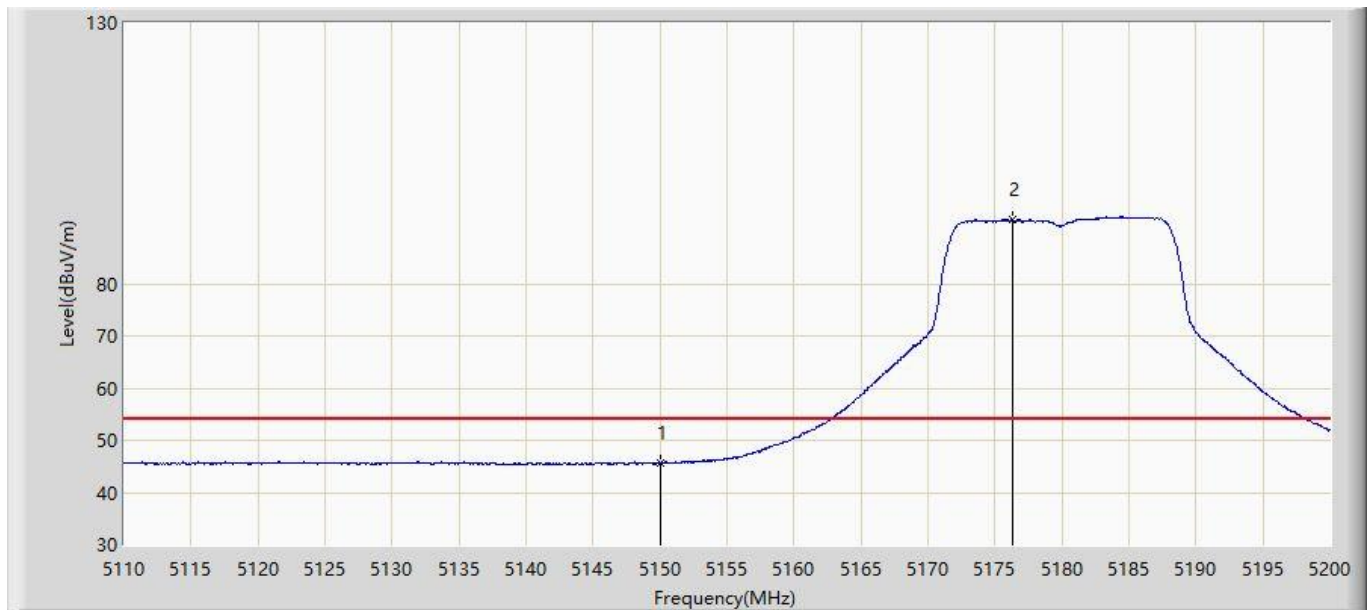


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.621                 | 41.975               | -8.379      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5176.330        | 92.306                 | 88.643               | N/A         | N/A            | 3.663       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2020/04/13 - 16:15 |
| Limit: NCC LP0002_1GHz-40GHz                                                   | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                 | Polarity: Vertical       |
| EUT: 無線基地台                                                                     | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1321-Scan Antenna |                          |

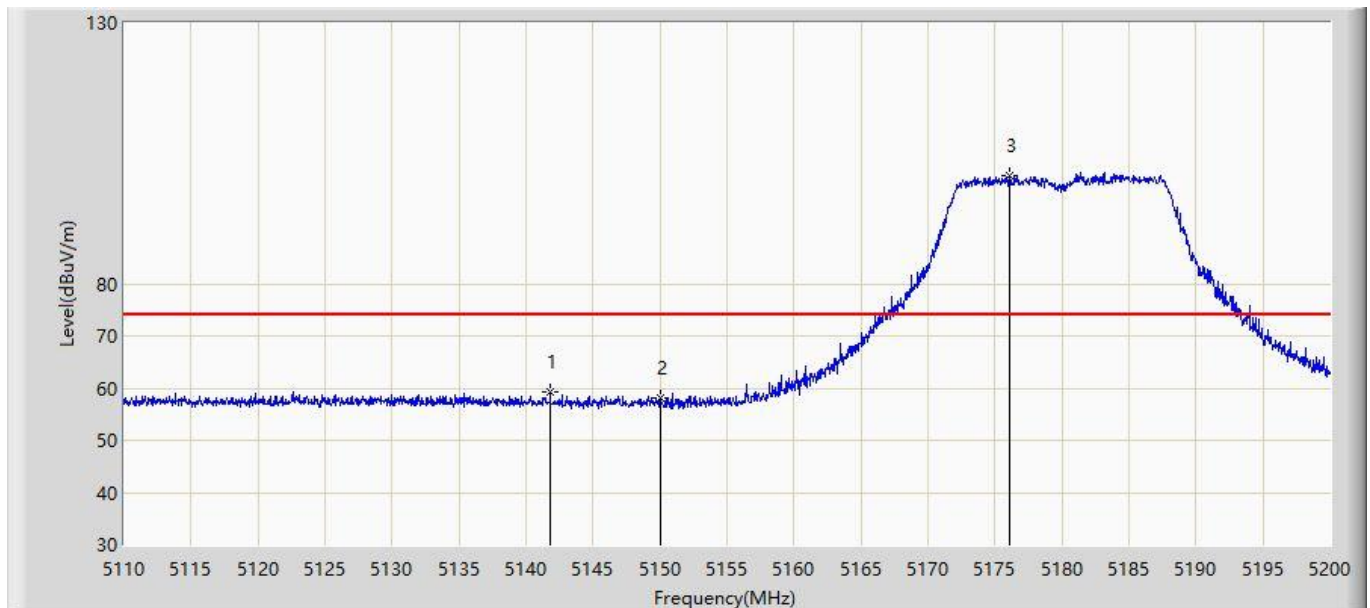


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5141.815        | 59.140                 | 55.499               | -14.860     | 74.000         | 3.641       | PK   |
| 2  |      |      | 5150.000        | 58.053                 | 54.407               | -15.947     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5176.105        | 100.682                | 97.020               | N/A         | N/A            | 3.663       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2020/04/13 - 16:19 |
| Limit: NCC LP0002_1GHz-40GHz                                                   | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                 | Polarity: Vertical       |
| EUT: 無線基地台                                                                     | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1321-Scan Antenna |                          |

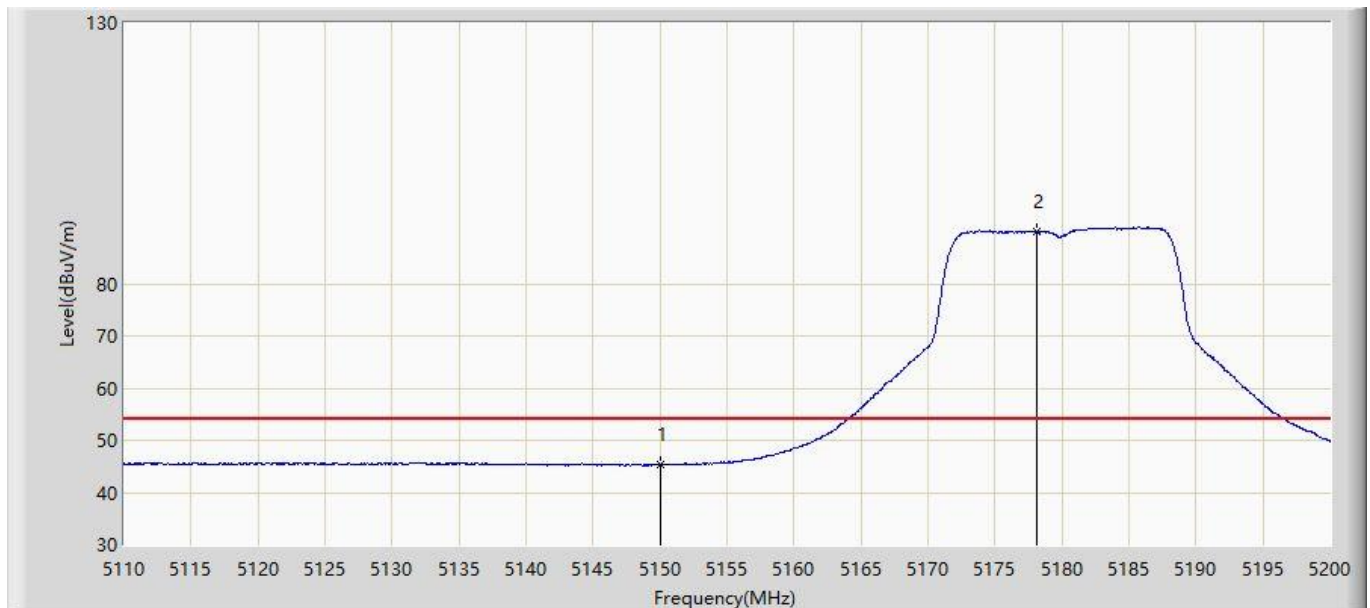


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.316                 | 41.670               | -8.684      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5178.130        | 90.125                 | 86.461               | N/A         | N/A            | 3.664       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2020/04/13 - 16:49 |
| Limit: NCC LP0002_1GHz-40GHz                                                   | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                 | Polarity: Horizontal     |
| EUT: 無線基地台                                                                     | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1321-Scan Antenna |                          |

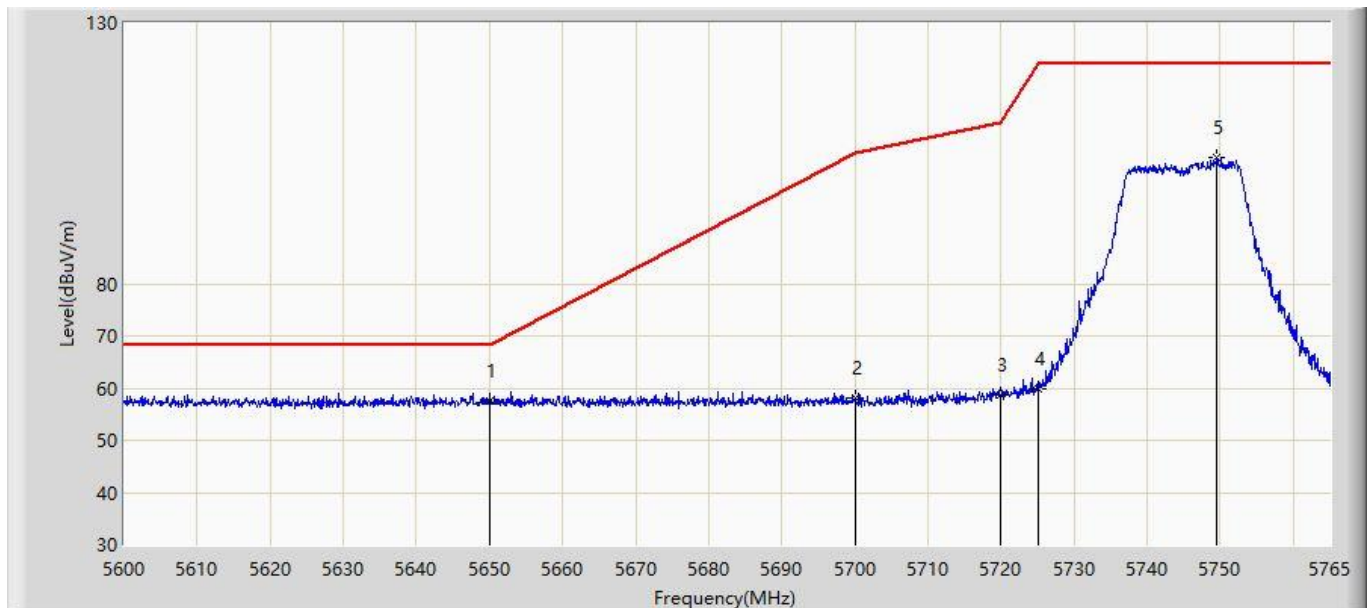


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5650.000        | 57.525                 | 53.079               | -10.675     | 68.200         | 4.446       | PK   |
| 2  |      |      | 5700.000        | 57.976                 | 53.338               | -47.224     | 105.200        | 4.638       | PK   |
| 3  |      |      | 5720.000        | 58.606                 | 53.891               | -52.194     | 110.800        | 4.715       | PK   |
| 4  |      |      | 5725.000        | 59.894                 | 55.160               | -62.306     | 122.200        | 4.734       | PK   |
| 5  |      |      | 5749.572        | 104.278                | 99.450               | N/A         | N/A            | 4.828       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2020/04/13 - 16:54 |
| Limit: NCC LP0002_1GHz-40GHz                                                   | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                 | Polarity: Vertical       |
| EUT: 無線基地台                                                                     | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1321-Scan Antenna |                          |

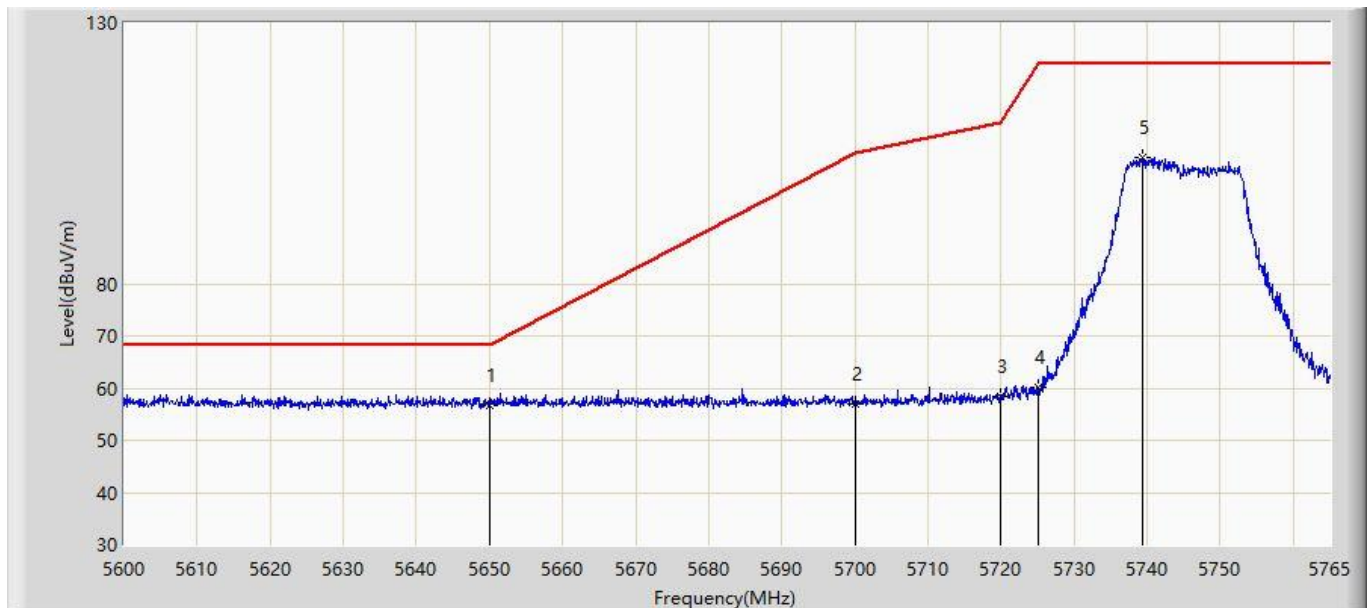


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5650.000        | 56.759                 | 52.313               | -11.441     | 68.200         | 4.446       | PK   |
| 2  |      |      | 5700.000        | 57.081                 | 52.443               | -48.119     | 105.200        | 4.638       | PK   |
| 3  |      |      | 5720.000        | 58.321                 | 53.606               | -52.479     | 110.800        | 4.715       | PK   |
| 4  |      |      | 5725.000        | 60.100                 | 55.366               | -62.100     | 122.200        | 4.734       | PK   |
| 5  |      |      | 5739.425        | 104.217                | 99.428               | N/A         | N/A            | 4.790       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2020/04/13 - 16:56 |
| Limit: NCC LP0002_1GHz-40GHz                                                   | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                 | Polarity: Horizontal     |
| EUT: 無線基地台                                                                     | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1321-Scan Antenna |                          |

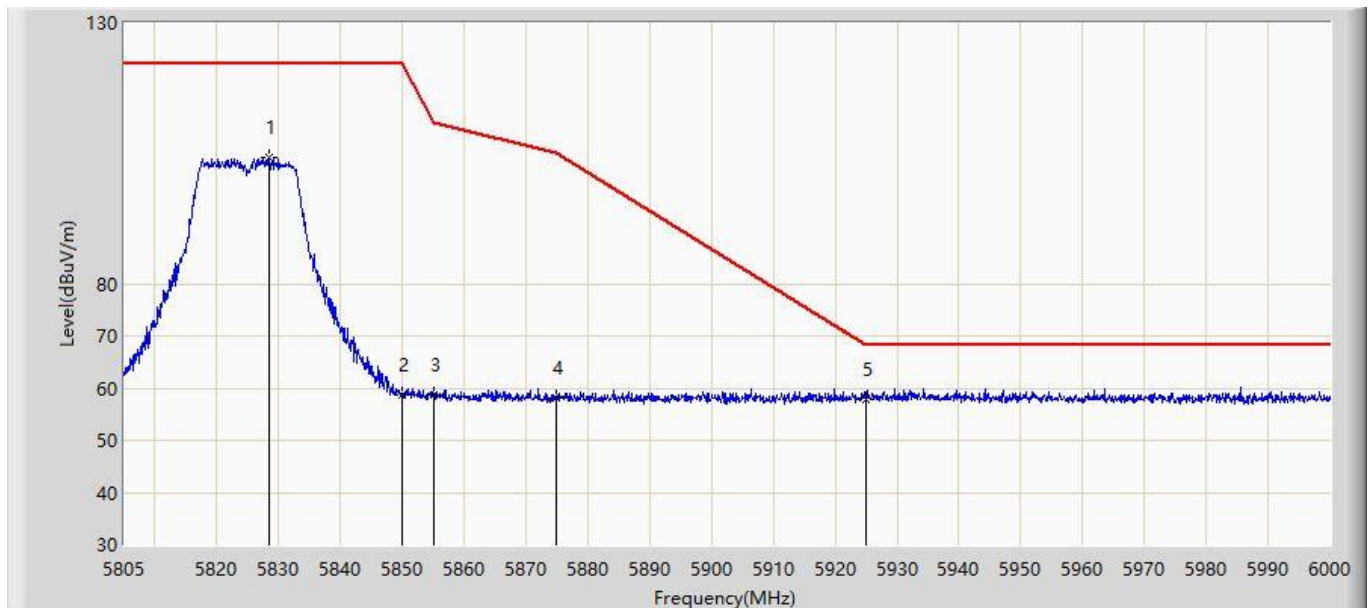


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5828.400        | 104.264                | 99.133               | N/A         | N/A            | 5.131       | PK   |
| 2  |      |      | 5850.000        | 58.554                 | 53.340               | -63.646     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 58.828                 | 53.595               | -51.972     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 58.136                 | 52.826               | -47.064     | 105.200        | 5.310       | PK   |
| 5  |      | *    | 5925.000        | 57.715                 | 52.213               | -10.485     | 68.200         | 5.502       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                |                          |
|--------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                      | Time: 2020/04/13 - 16:59 |
| Limit: NCC LP0002_1GHz-40GHz                                                   | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                                 | Polarity: Vertical       |
| EUT: 無線基地台                                                                     | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1321-Scan Antenna |                          |

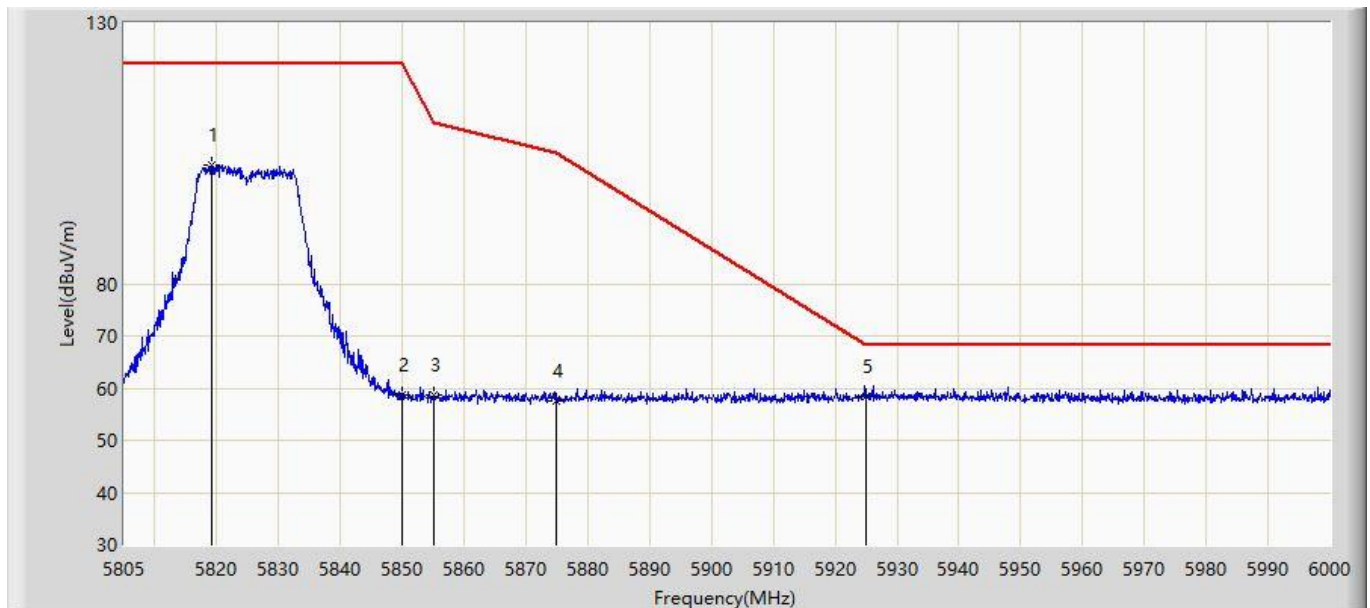


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5819.138        | 102.748                | 97.652               | -19.452     | 122.200        | 5.095       | PK   |
| 2  |      |      | 5850.000        | 58.659                 | 53.445               | -63.541     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 58.596                 | 53.363               | -52.204     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 57.437                 | 52.127               | -47.763     | 105.200        | 5.310       | PK   |
| 5  |      | *    | 5925.000        | 58.504                 | 53.002               | N/A         | N/A            | 5.502       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

## 無線基地台-OAW-AP1322 – CDD Mode

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 13:41 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Horizontal     |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5180MHz with OAW-AP1322 |                          |

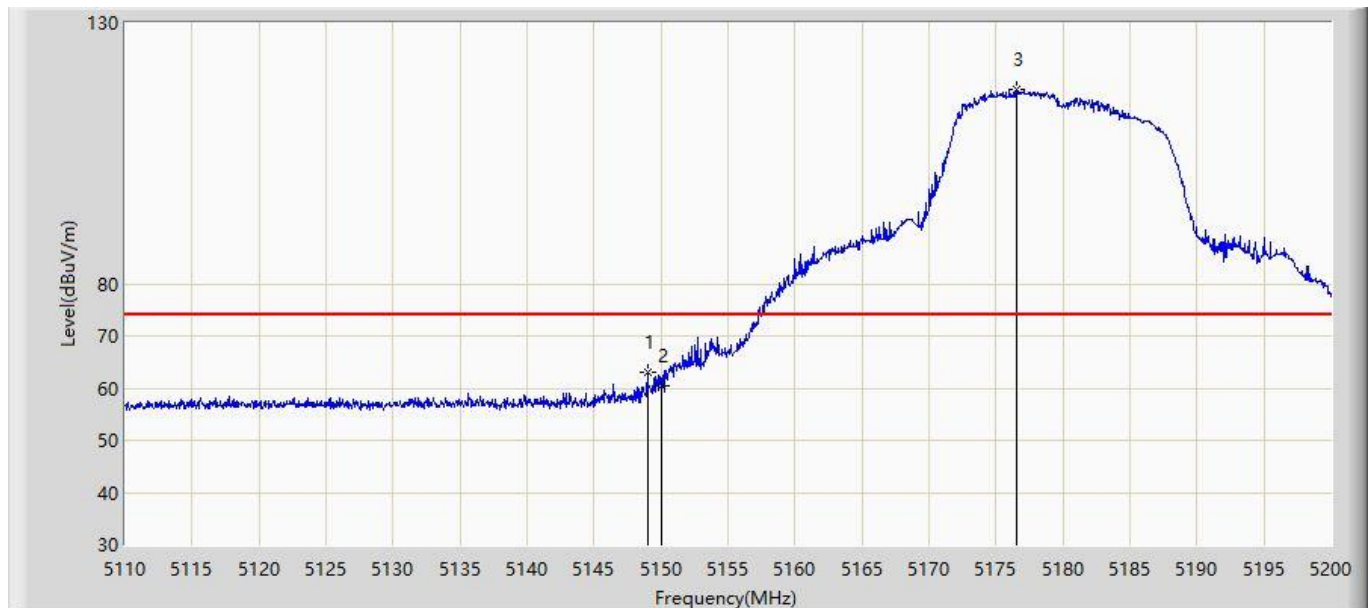


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.970        | 62.998                 | 59.352               | -11.002     | 74.000         | 3.646       | PK   |
| 2  |      |      | 5150.000        | 60.523                 | 56.877               | -13.477     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5176.510        | 117.147                | 113.484              | N/A         | N/A            | 3.663       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 13:48 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Horizontal     |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5180MHz with OAW-AP1322 |                          |

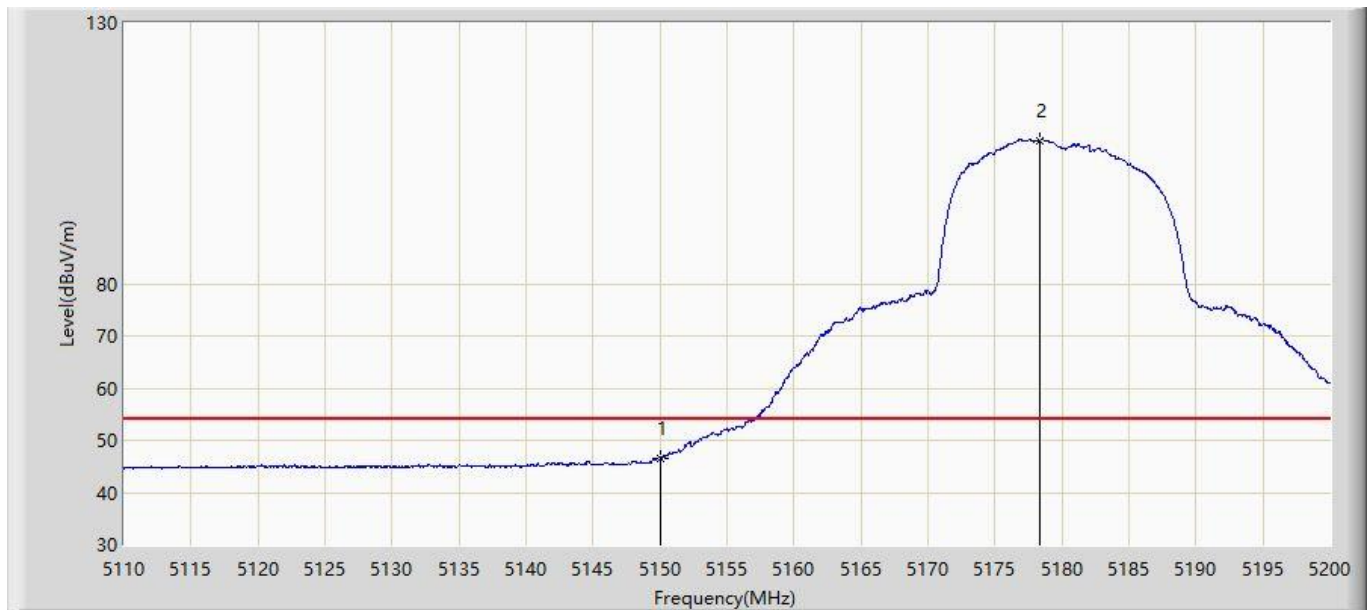


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 46.439                 | 42.793               | -7.561      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5178.310        | 107.497                | 103.833              | N/A         | N/A            | 3.664       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 13:49 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Vertical       |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5180MHz with OAW-AP1322 |                          |

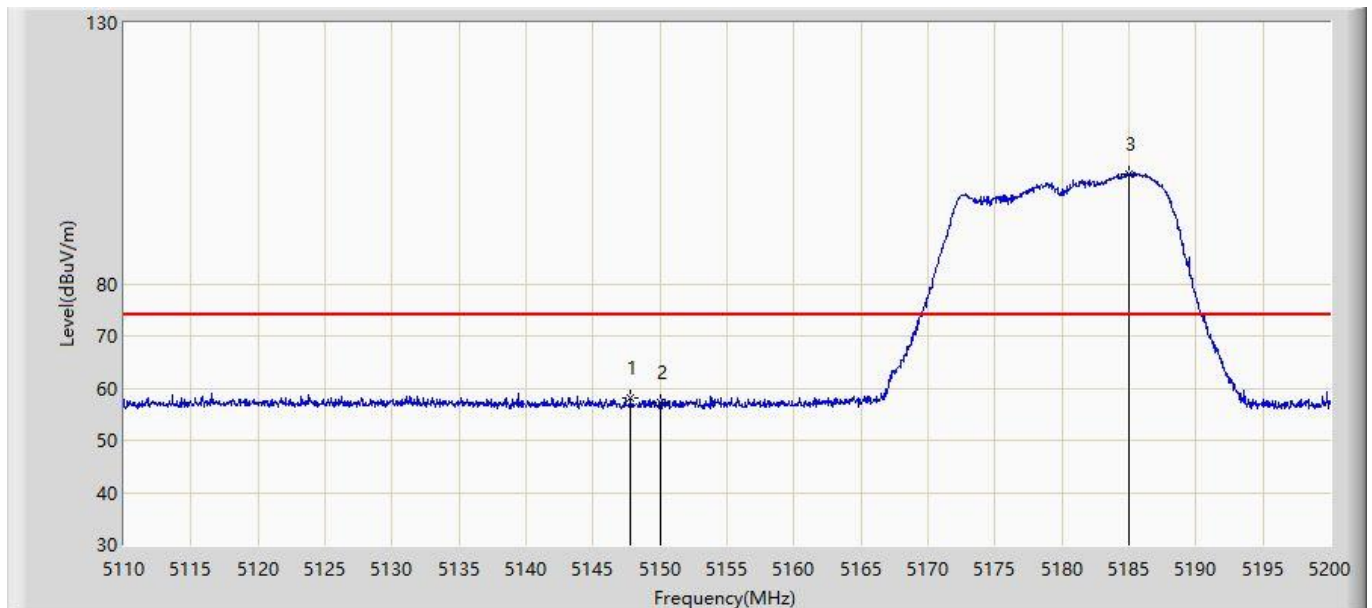


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5147.800        | 58.194                 | 54.549               | -15.806     | 74.000         | 3.645       | PK   |
| 2  |      |      | 5150.000        | 57.189                 | 53.543               | -16.811     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5185.015        | 101.142                | 97.474               | N/A         | N/A            | 3.669       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 13:51 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Vertical       |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5180MHz with OAW-AP1322 |                          |

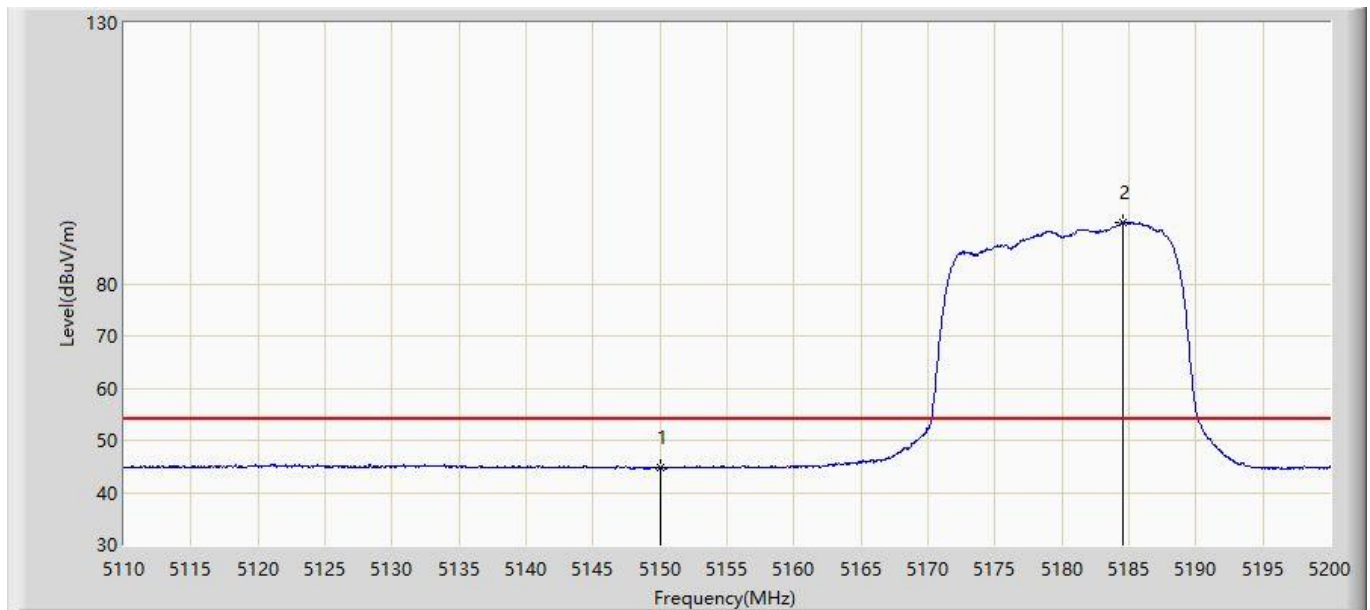


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.711                 | 41.065               | -9.289      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5184.565        | 91.673                 | 88.005               | N/A         | N/A            | 3.668       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 13:53 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Horizontal     |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5320MHz with OAW-AP1322 |                          |

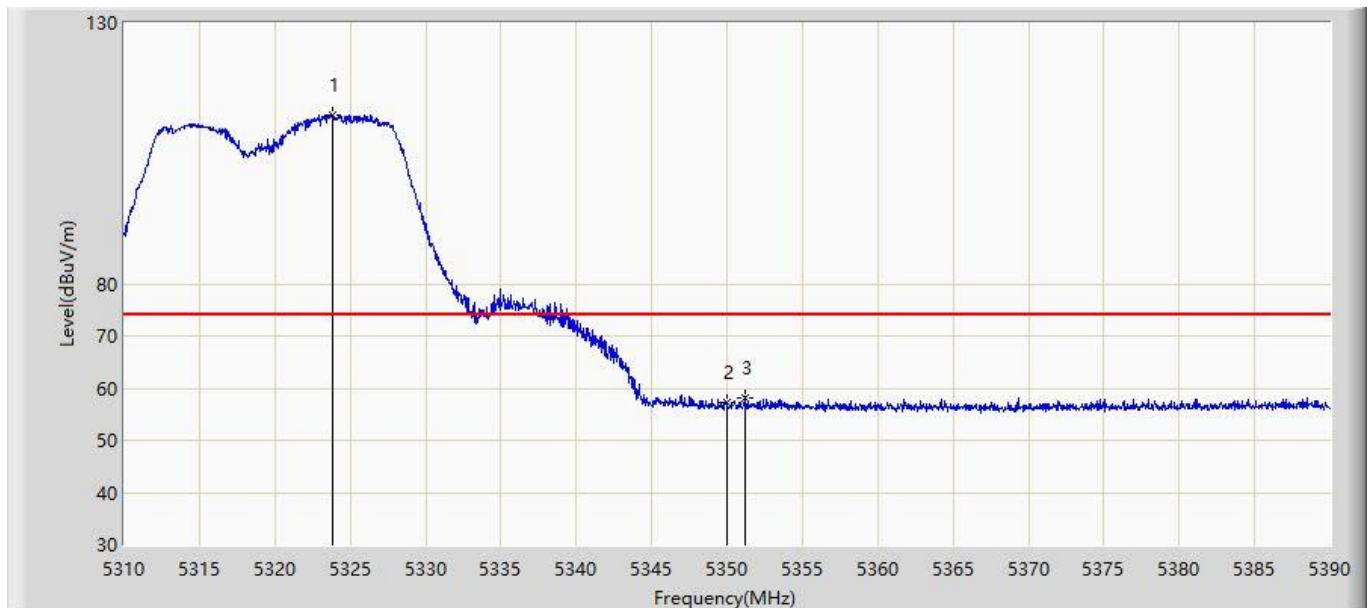


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5323.880        | 112.337                | 108.579              | N/A         | N/A            | 3.757       | PK   |
| 2  |      |      | 5350.000        | 57.204                 | 53.430               | -16.796     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5351.240        | 58.260                 | 54.485               | -15.740     | 74.000         | 3.775       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 13:59 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Horizontal     |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5320MHz with OAW-AP1322 |                          |

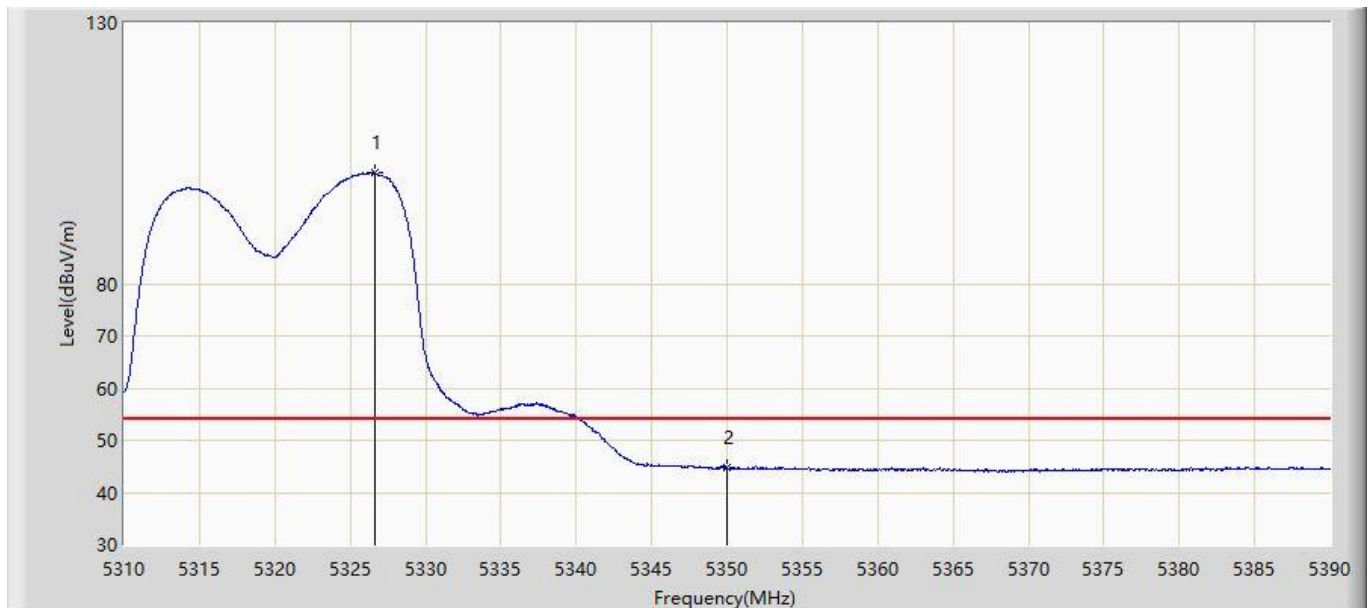


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5326.600        | 101.347                | 97.587               | N/A         | N/A            | 3.760       | AV   |
| 2  |      |      | 5350.000        | 44.724                 | 40.950               | -9.276      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:00 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Vertical       |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5320MHz with OAW-AP1322 |                          |

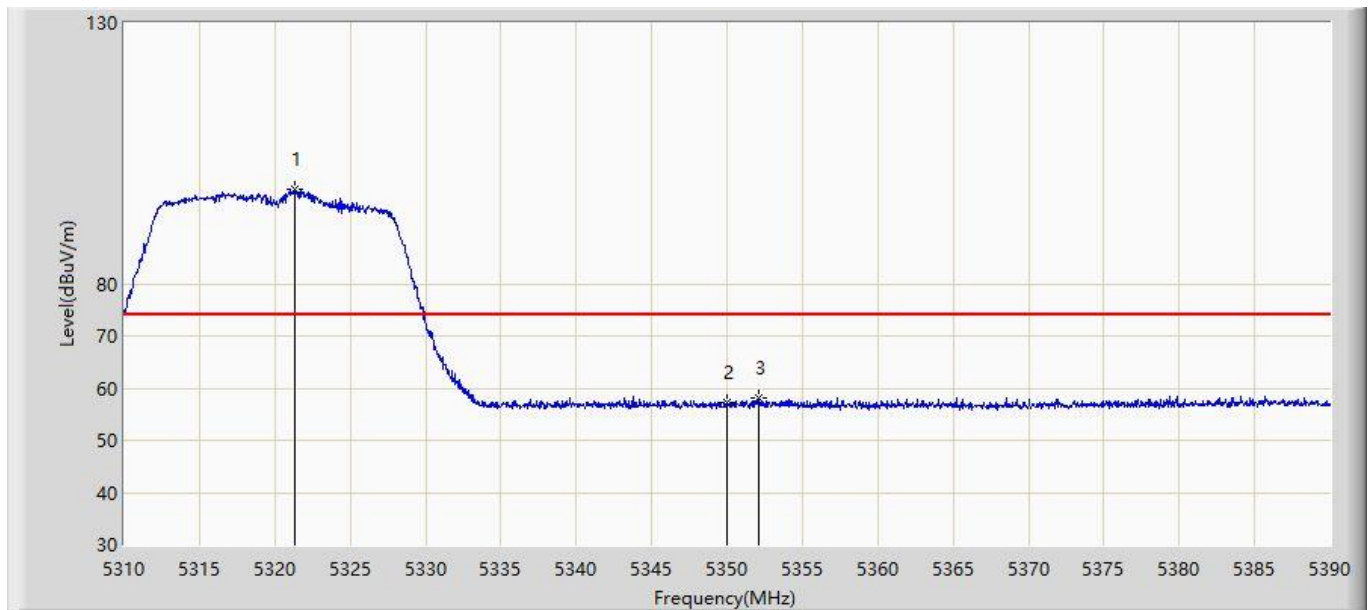


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5321.320        | 98.252                 | 94.496               | N/A         | N/A            | 3.756       | PK   |
| 2  |      |      | 5350.000        | 57.109                 | 53.335               | -16.891     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5352.080        | 58.143                 | 54.368               | -15.857     | 74.000         | 3.775       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:08 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Vertical       |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5320MHz with OAW-AP1322 |                          |

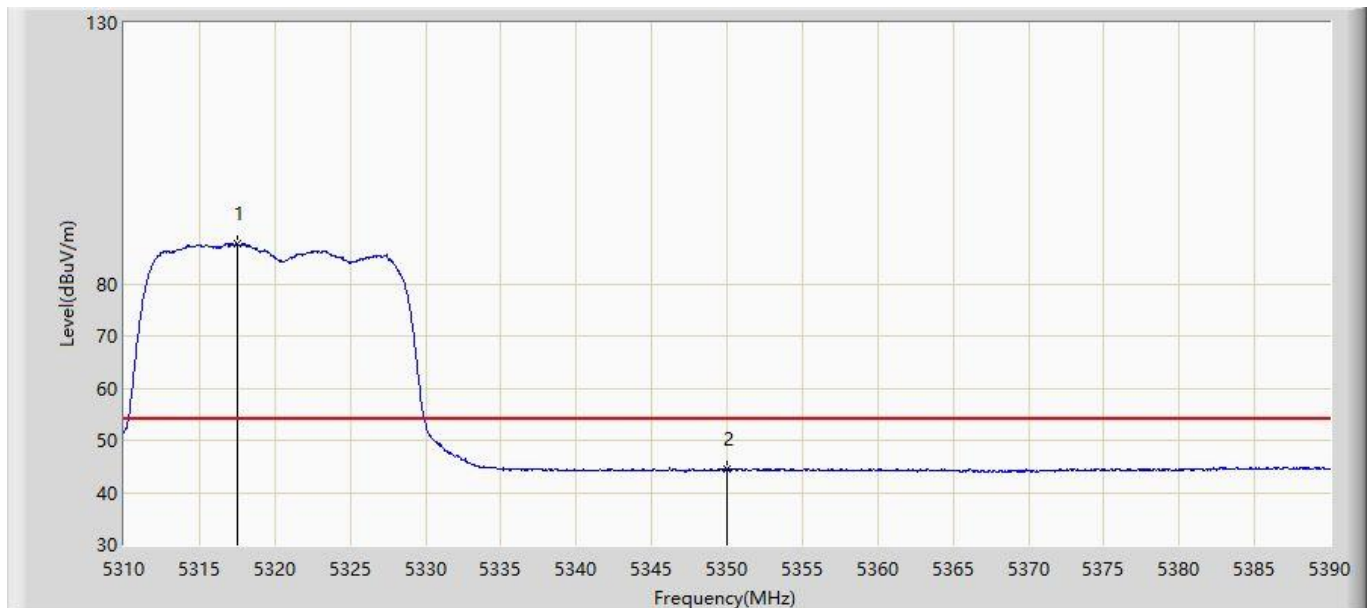


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5317.480        | 87.626                 | 83.872               | N/A         | N/A            | 3.754       | AV   |
| 2  |      |      | 5350.000        | 44.400                 | 40.626               | -9.600      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:11 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Horizontal     |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5500MHz with OAW-AP1322 |                          |

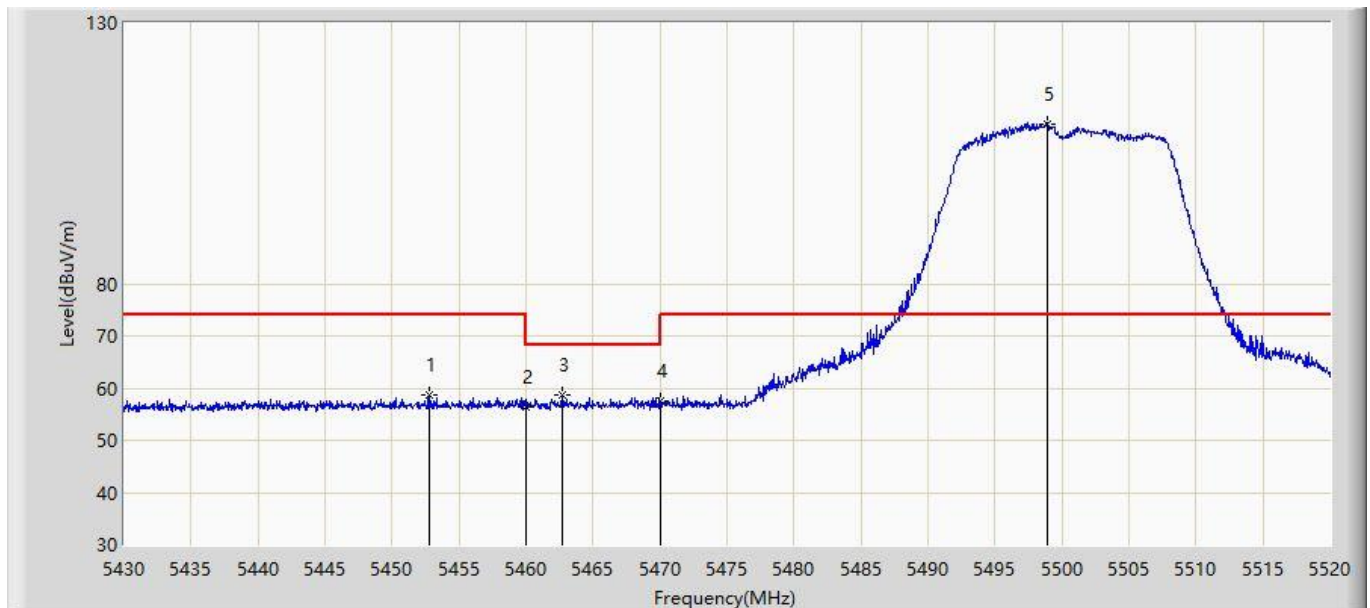


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5452.815        | 58.731                 | 54.892               | -15.269     | 74.000         | 3.839       | PK   |
| 2  |      |      | 5460.000        | 56.341                 | 52.497               | -17.659     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5462.670        | 58.659                 | 54.813               | -9.541      | 68.200         | 3.846       | PK   |
| 4  |      |      | 5470.000        | 57.498                 | 53.647               | -10.702     | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5498.895        | 110.724                | 106.844              | N/A         | N/A            | 3.879       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:13 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Horizontal     |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5500MHz with OAW-AP1322 |                          |

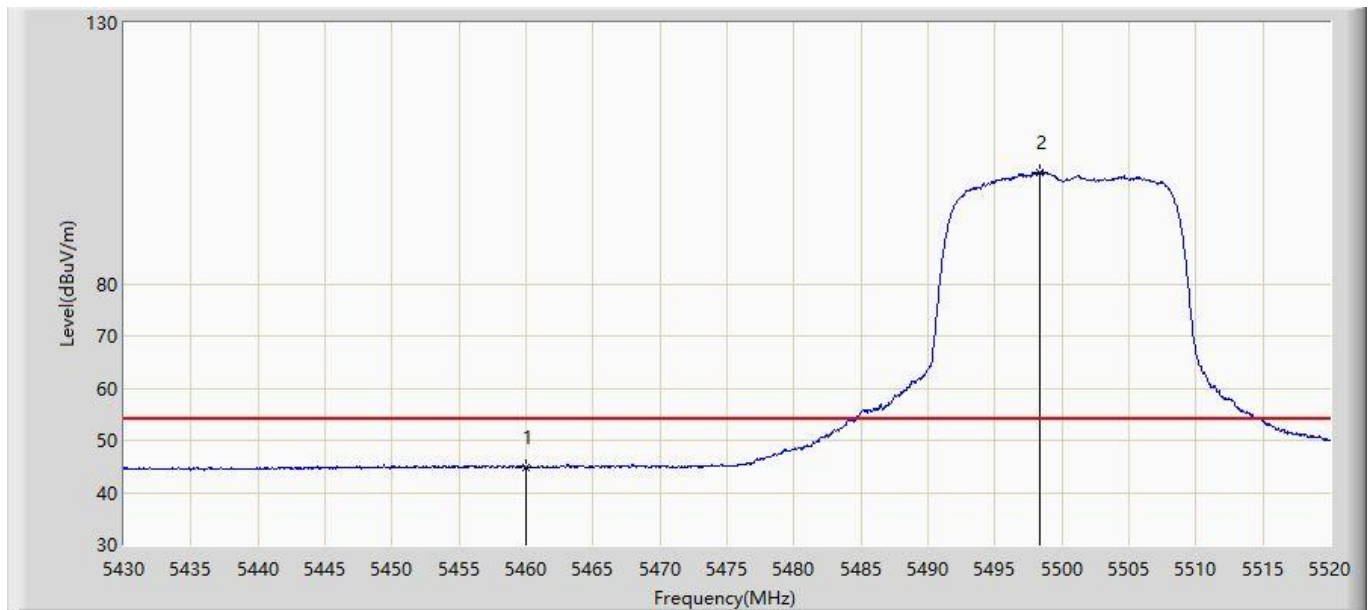


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.790                 | 40.946               | -9.210      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5498.355        | 101.362                | 97.483               | N/A         | N/A            | 3.879       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:14 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Vertical       |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5500MHz with OAW-AP1322 |                          |

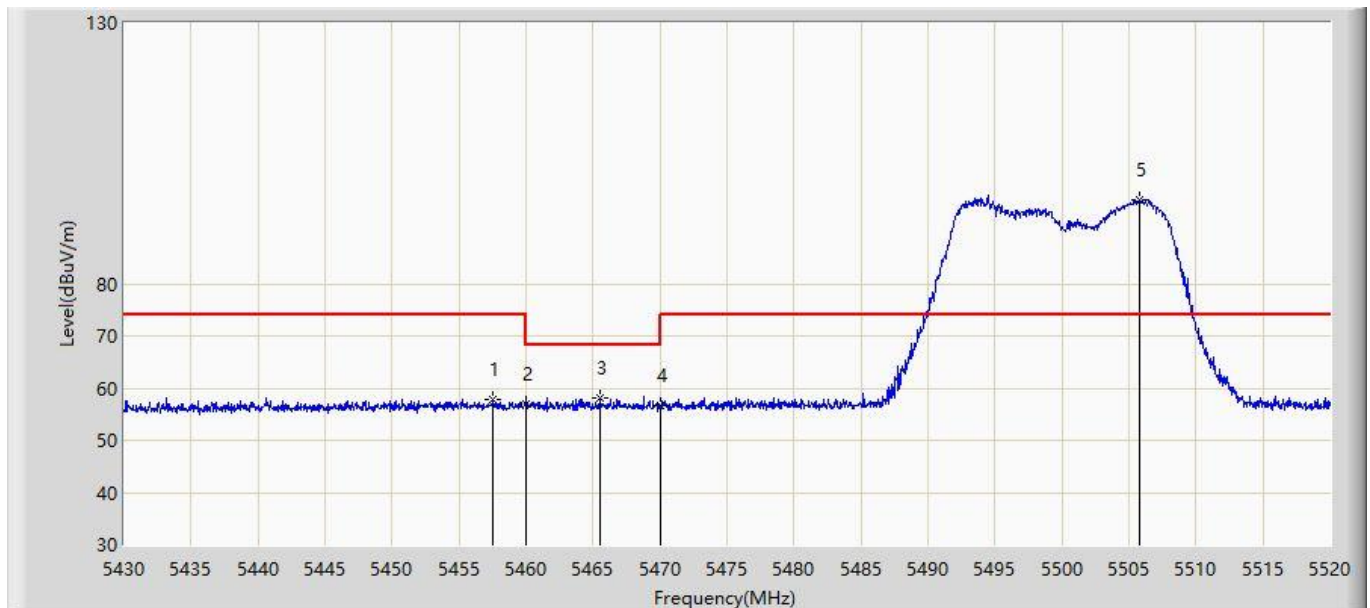


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5457.540        | 57.837                 | 53.995               | -16.163     | 74.000         | 3.842       | PK   |
| 2  |      |      | 5460.000        | 56.854                 | 53.010               | -17.146     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5465.550        | 57.972                 | 54.124               | -10.228     | 68.200         | 3.847       | PK   |
| 4  |      |      | 5470.000        | 56.712                 | 52.861               | -11.488     | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5505.735        | 96.062                 | 92.170               | N/A         | N/A            | 3.892       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:15 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Vertical       |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5500MHz with OAW-AP1322 |                          |

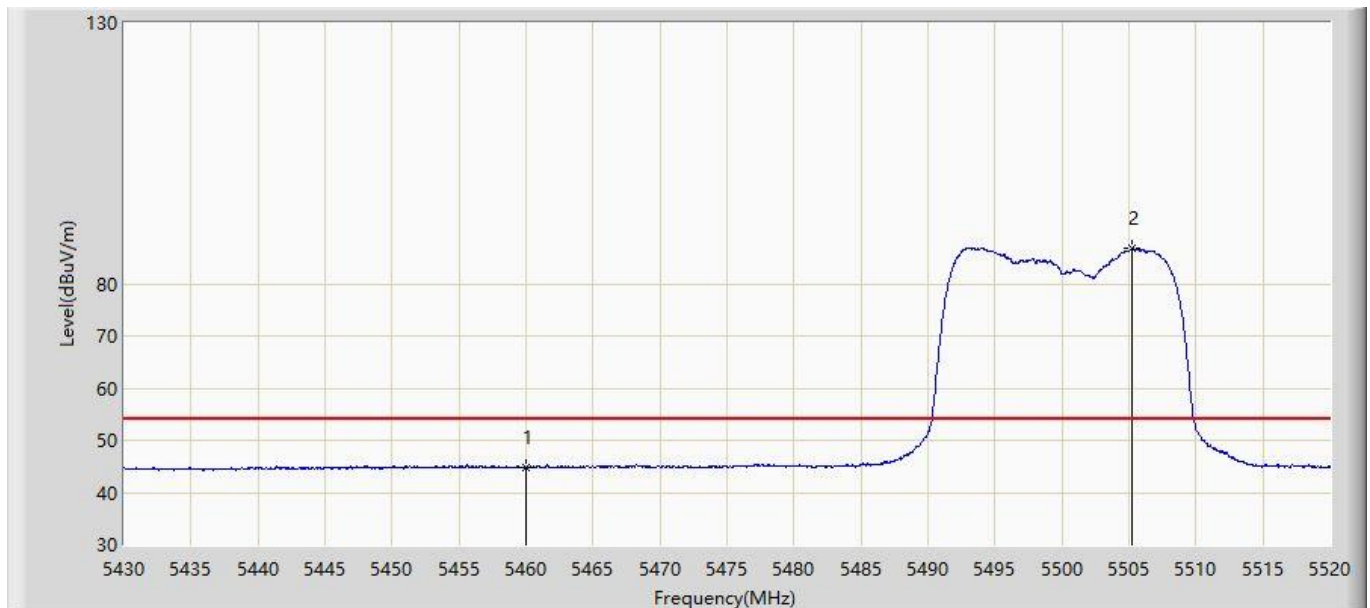


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.768                 | 40.924               | -9.232      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5505.240        | 86.677                 | 82.787               | N/A         | N/A            | 3.890       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:17 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Horizontal     |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5700MHz with OAW-AP1322 |                          |

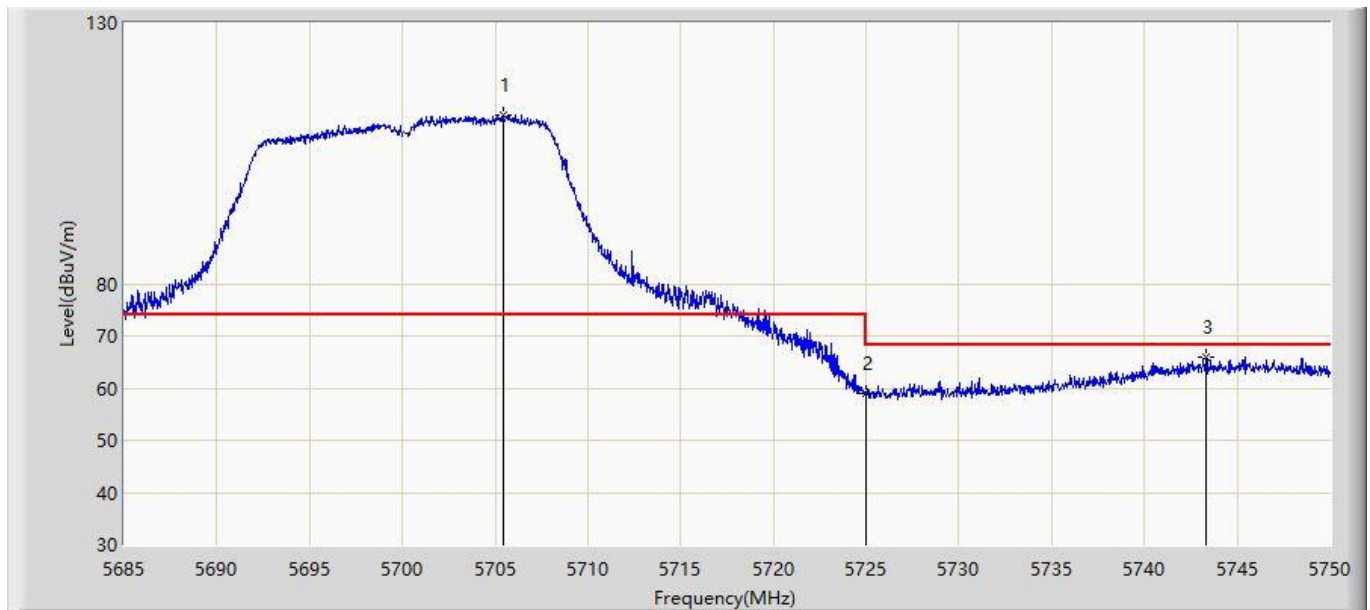


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5705.475        | 112.214                | 107.555              | N/A         | N/A            | 4.660       | PK   |
| 2  |      |      | 5725.000        | 58.951                 | 54.217               | -9.249      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5743.337        | 66.037                 | 61.233               | -2.163      | 68.200         | 4.804       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:19 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Vertical       |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5700MHz with OAW-AP1322 |                          |

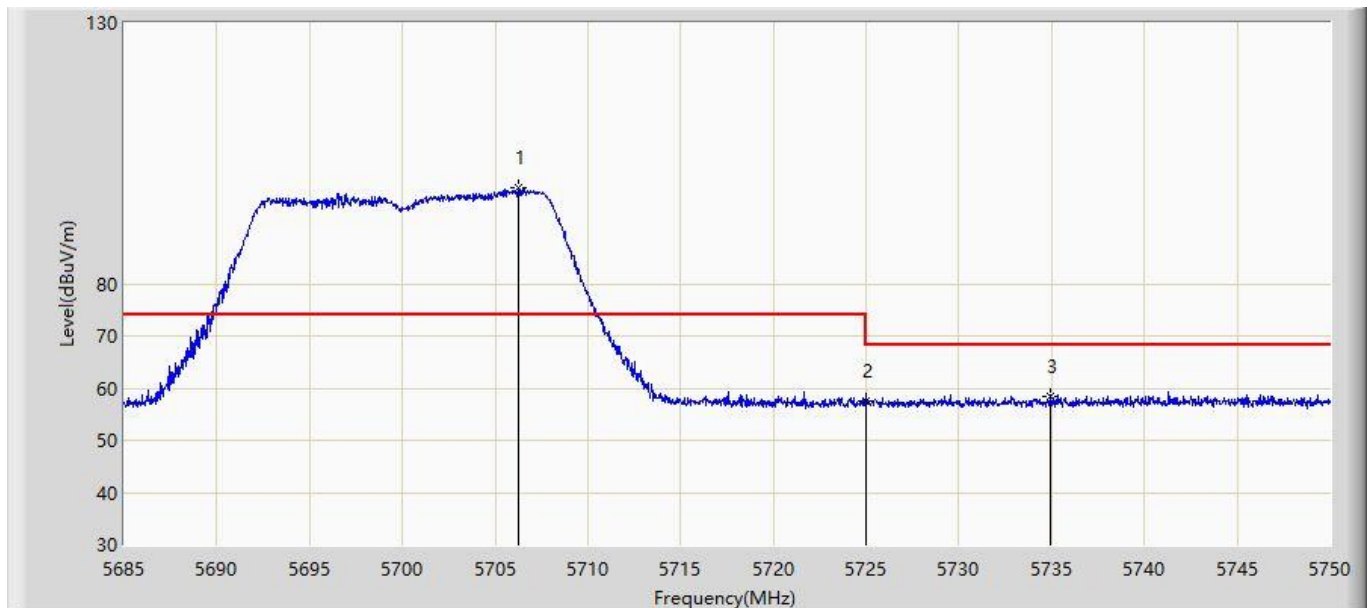


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5706.255        | 98.337                 | 93.675               | N/A         | N/A            | 4.662       | PK   |
| 2  |      |      | 5725.000        | 57.609                 | 52.875               | -10.591     | 68.200         | 4.734       | PK   |
| 3  |      |      | 5734.953        | 58.548                 | 53.776               | -9.652      | 68.200         | 4.772       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:20 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Horizontal     |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5745MHz with OAW-AP1322 |                          |

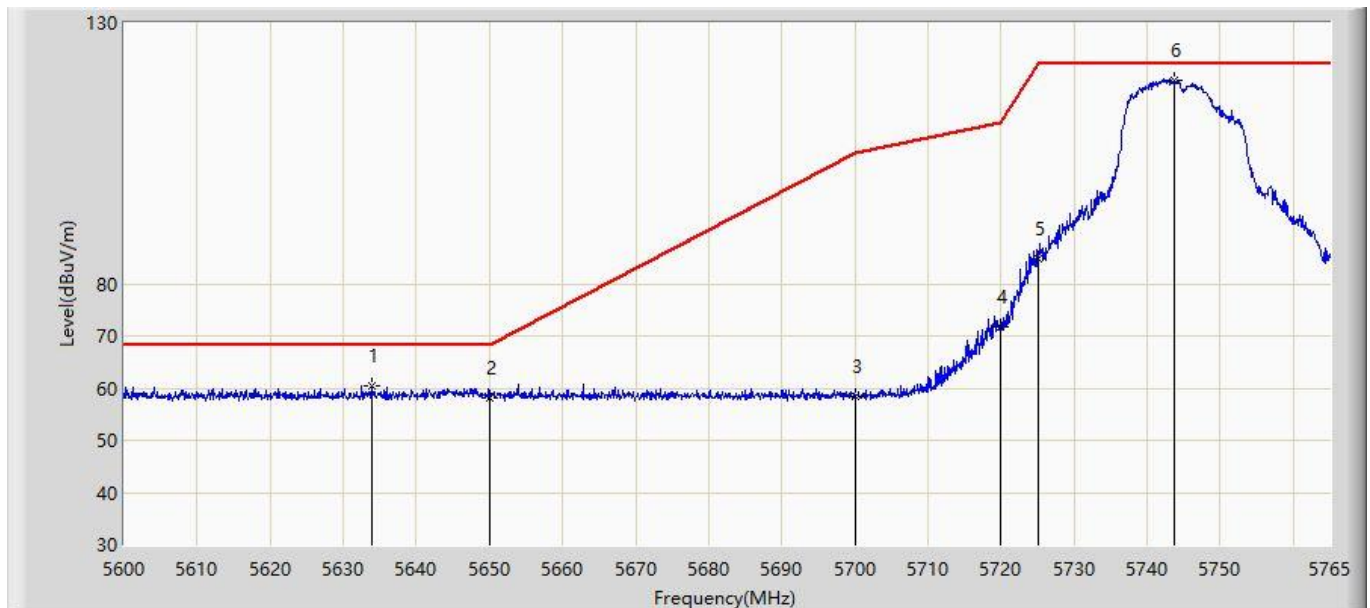


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5633.825        | 60.554                 | 56.170               | -7.646      | 68.200         | 4.385       | PK   |
| 2  |      |      | 5650.000        | 58.255                 | 53.809               | -9.945      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 58.263                 | 53.625               | -46.937     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 71.595                 | 66.880               | -39.205     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 84.667                 | 79.933               | -37.533     | 122.200        | 4.734       | PK   |
| 6  |      | *    | 5743.797        | 119.073                | 114.267              | N/A         | N/A            | 4.805       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:23 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Vertical       |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5745MHz with OAW-AP1322 |                          |

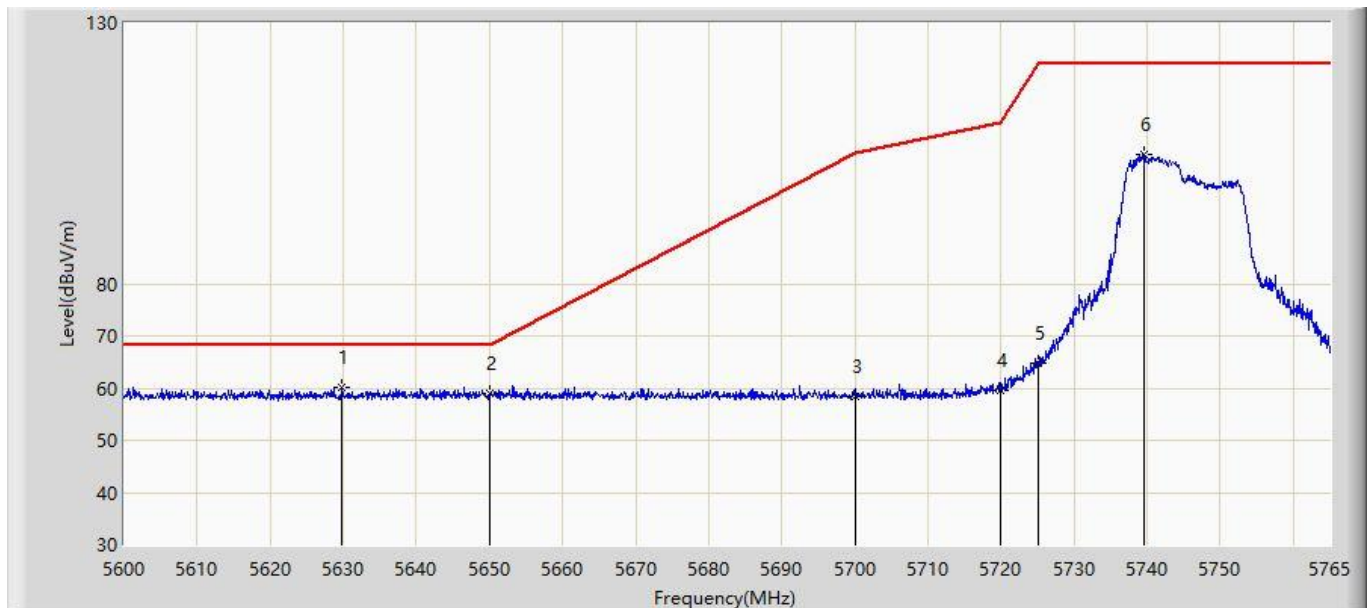


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5629.865        | 60.169                 | 55.800               | -8.031      | 68.200         | 4.369       | PK   |
| 2  |      |      | 5650.000        | 59.018                 | 54.572               | -9.182      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 58.410                 | 53.772               | -46.790     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 59.688                 | 54.973               | -51.112     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 64.668                 | 59.934               | -57.532     | 122.200        | 4.734       | PK   |
| 6  |      |      | 5739.507        | 104.703                | 99.914               | N/A         | N/A            | 4.790       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:24 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Horizontal     |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5825MHz with OAW-AP1322 |                          |

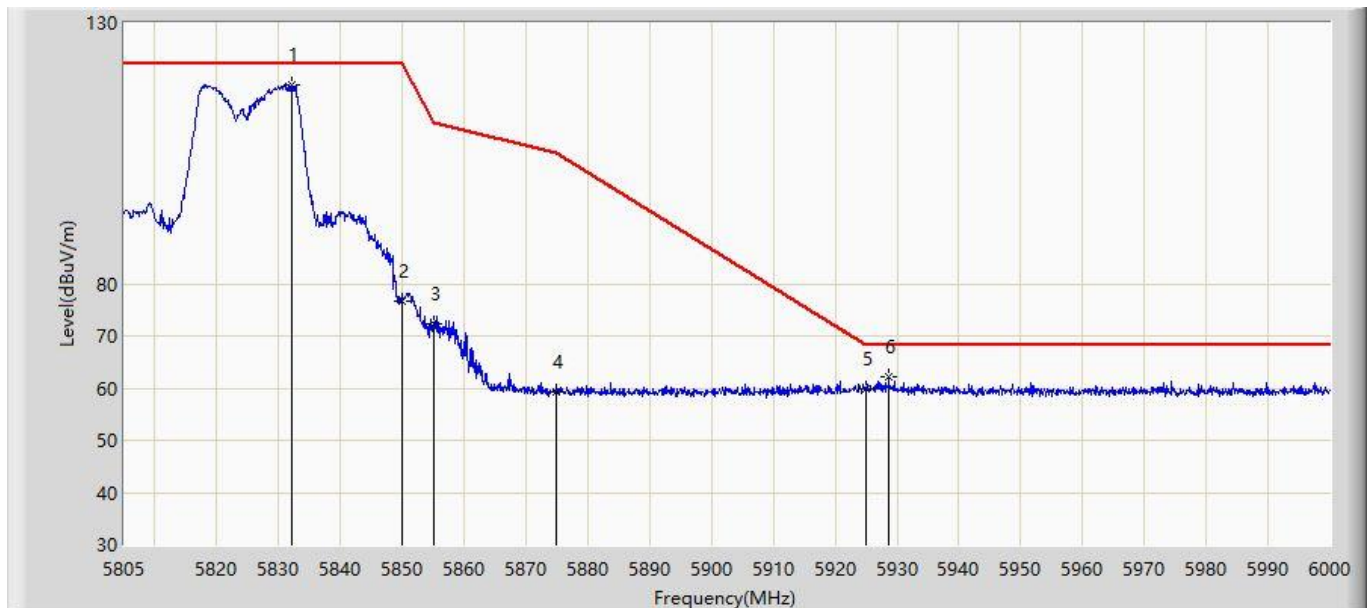


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5832.007        | 118.085                | 112.940              | N/A         | N/A            | 5.145       | PK   |
| 2  |      |      | 5850.000        | 76.529                 | 71.315               | -45.671     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 72.174                 | 66.941               | -38.626     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 59.241                 | 53.931               | -45.959     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 59.801                 | 54.299               | -8.399      | 68.200         | 5.502       | PK   |
| 6  |      |      | 5928.630        | 62.146                 | 56.630               | -6.054      | 68.200         | 5.516       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2020/03/22 - 14:26 |
| Limit: NCC LP0002_1GHz-40GHz                                      | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                    | Polarity: Vertical       |
| EUT: 無線基地台                                                        | Power: By PoE            |
| Test Mode: Transmit by 802.11a at channel 5825MHz with OAW-AP1322 |                          |

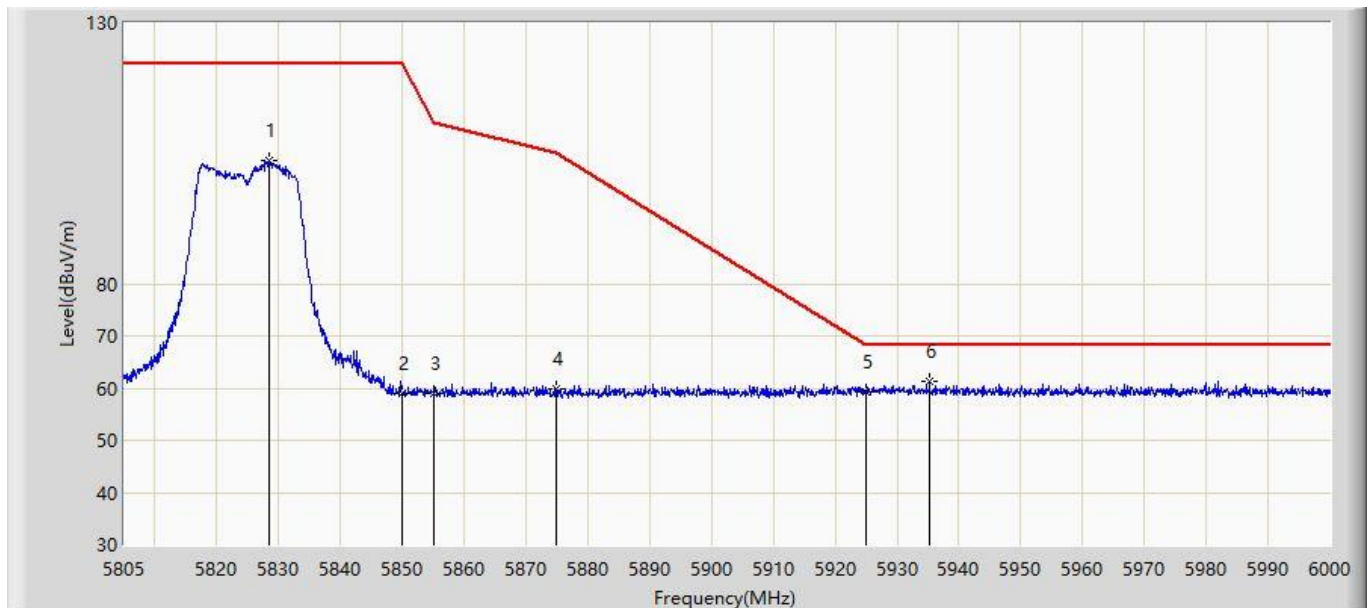


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5828.400        | 103.585                | 98.454               | N/A         | N/A            | 5.131       | PK   |
| 2  |      |      | 5850.000        | 59.057                 | 53.843               | -63.143     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 59.057                 | 53.824               | -51.743     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 59.820                 | 54.510               | -45.380     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 59.167                 | 53.665               | -9.033      | 68.200         | 5.502       | PK   |
| 6  |      | *    | 5935.260        | 61.252                 | 55.710               | -6.948      | 68.200         | 5.542       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 14:28 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz with OAW-AP1322 |                          |

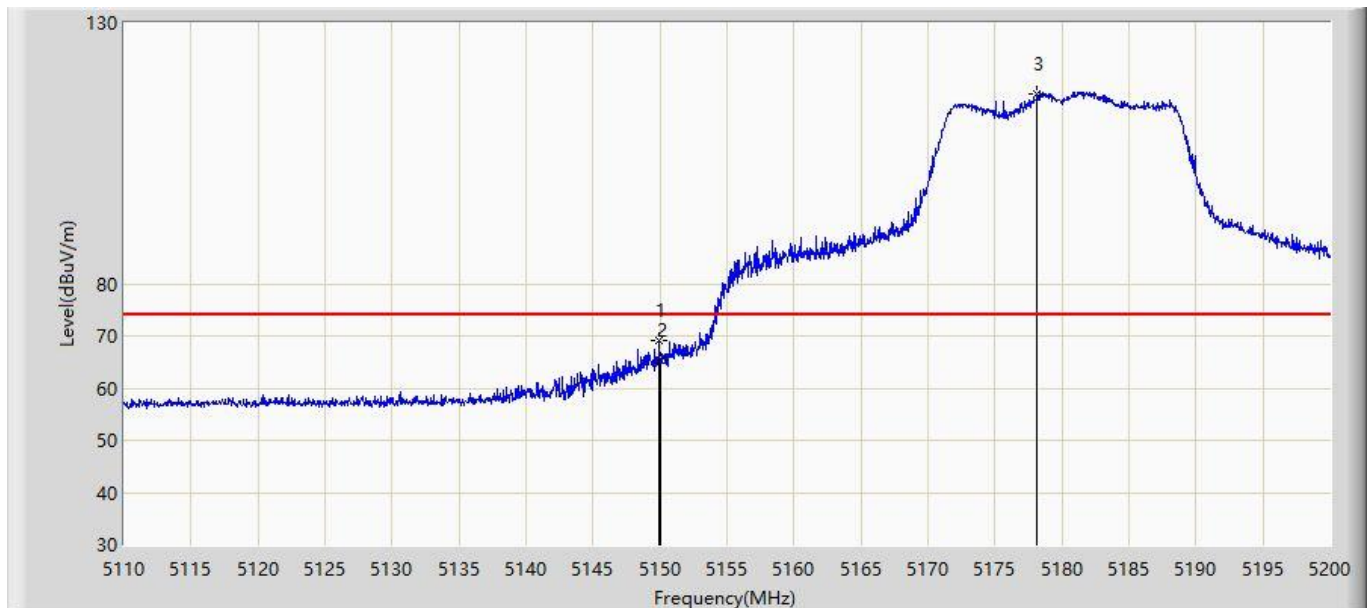


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.915        | 69.235                 | 65.589               | -4.765      | 74.000         | 3.646       | PK   |
| 2  |      |      | 5150.000        | 65.376                 | 61.730               | -8.624      | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5178.175        | 116.493                | 112.829              | N/A         | N/A            | 3.664       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 14:31 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz with OAW-AP1322 |                          |

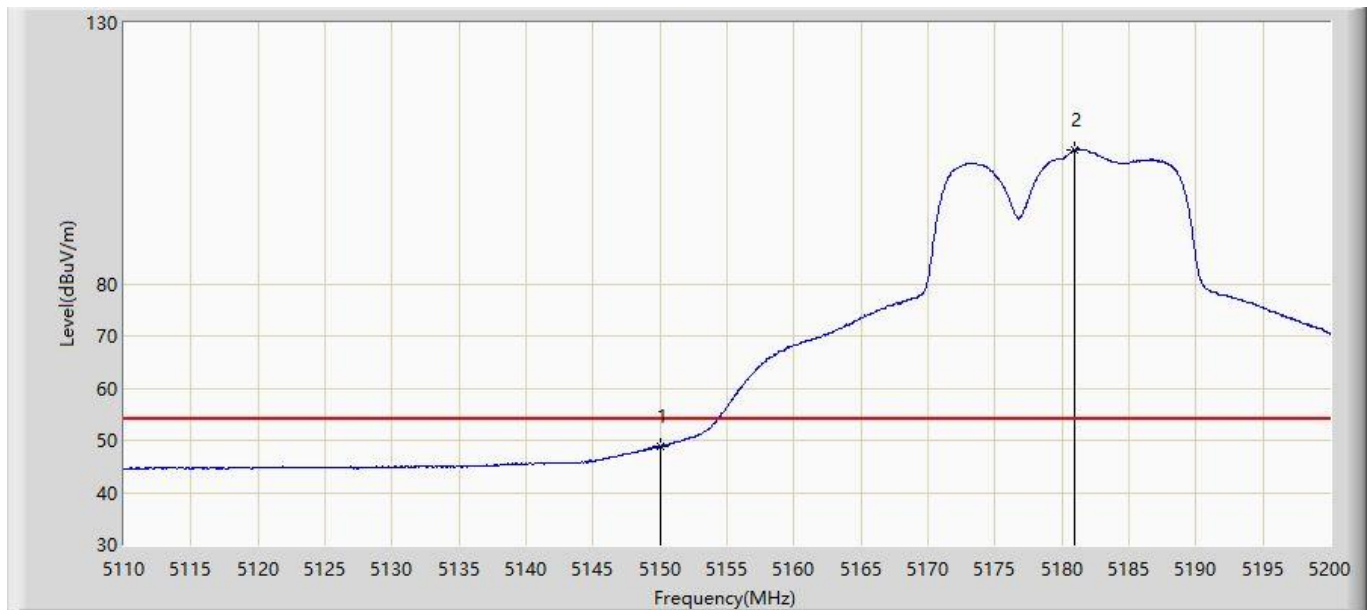


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 48.824                 | 45.178               | -5.176      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5180.920        | 105.657                | 101.991              | N/A         | N/A            | 3.665       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 14:32 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz with OAW-AP1322 |                          |

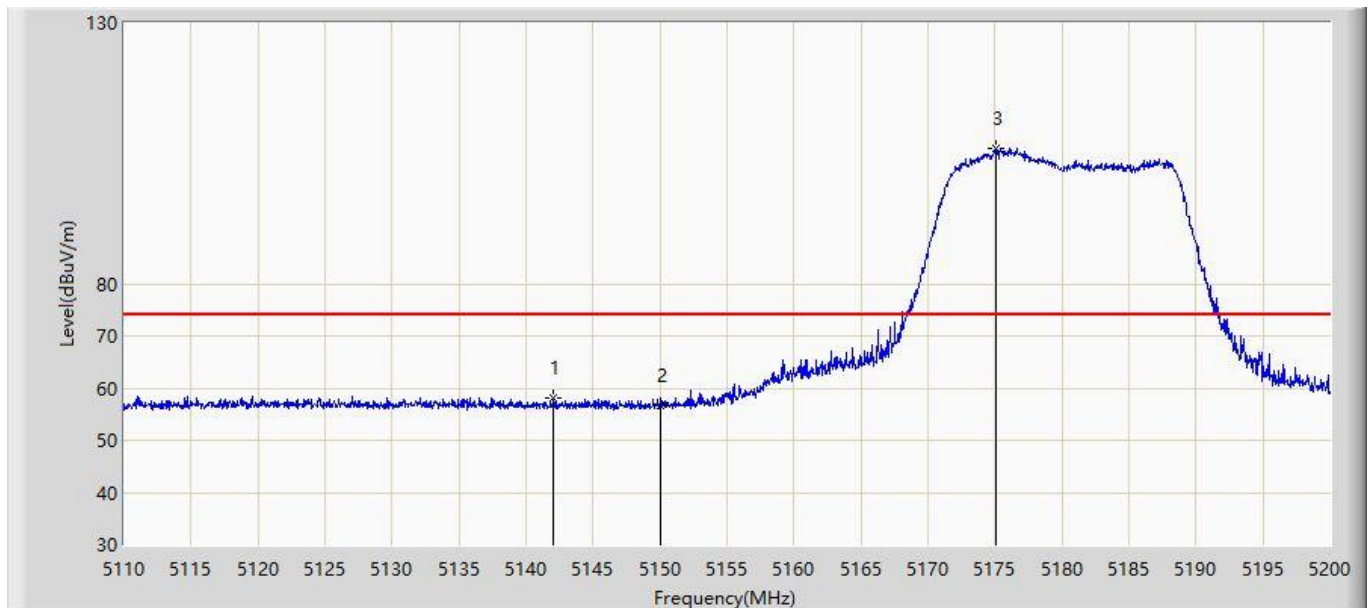


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5142.085        | 58.220                 | 54.579               | -15.780     | 74.000         | 3.642       | PK   |
| 2  |      |      | 5150.000        | 56.618                 | 52.972               | -17.382     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5175.070        | 105.811                | 102.149              | N/A         | N/A            | 3.662       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 14:33 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz with OAW-AP1322 |                          |

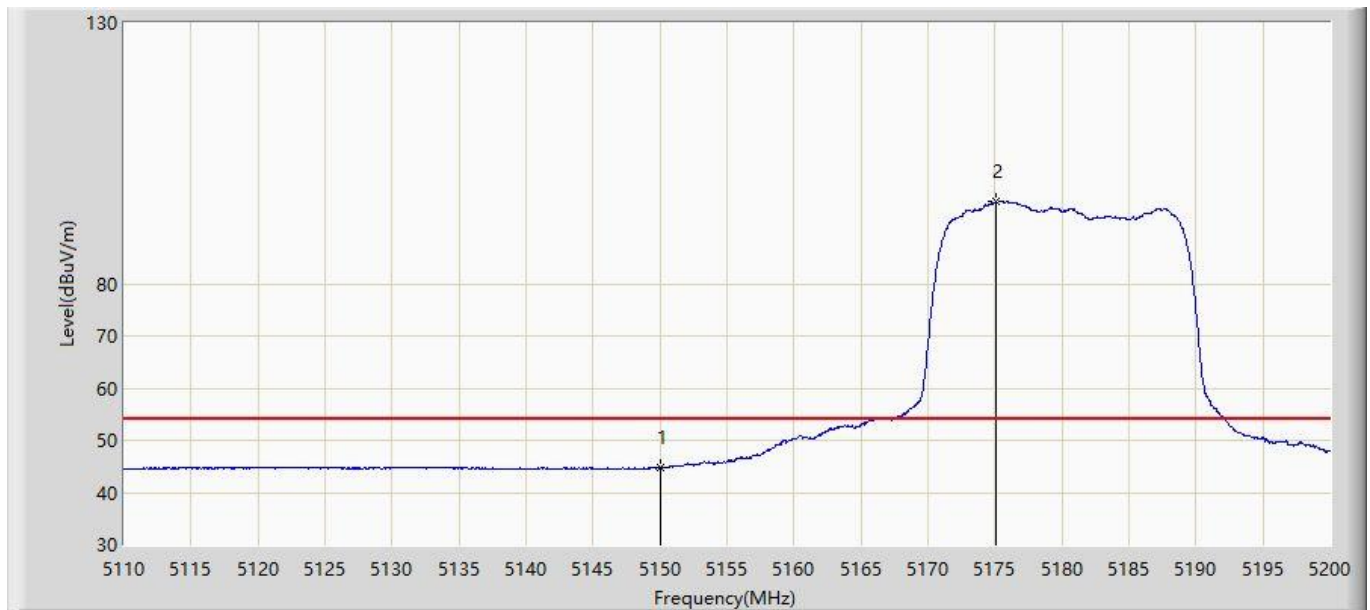


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 44.835                 | 41.189               | -9.165      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5175.070        | 95.693                 | 92.031               | N/A         | N/A            | 3.662       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 14:34 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz with OAW-AP1322 |                          |

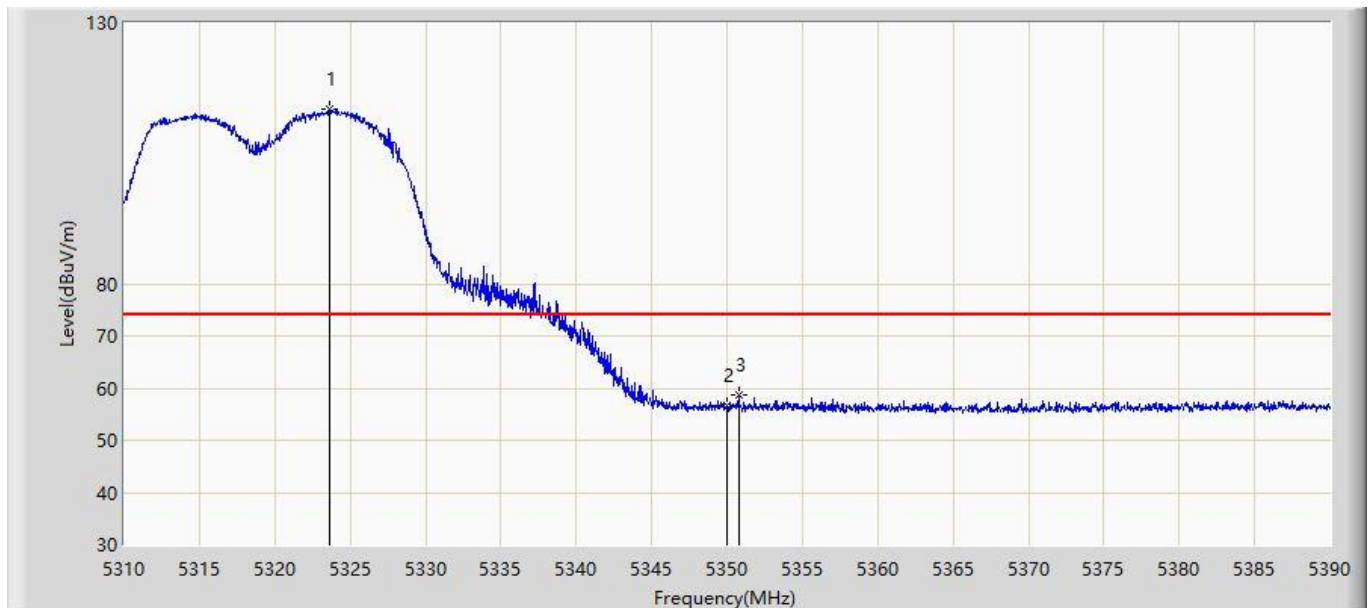


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5323.680        | 113.393                | 109.635              | N/A         | N/A            | 3.757       | PK   |
| 2  |      |      | 5350.000        | 56.585                 | 52.811               | -17.415     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5350.760        | 58.552                 | 54.778               | -15.448     | 74.000         | 3.774       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 14:36 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz with OAW-AP1322 |                          |

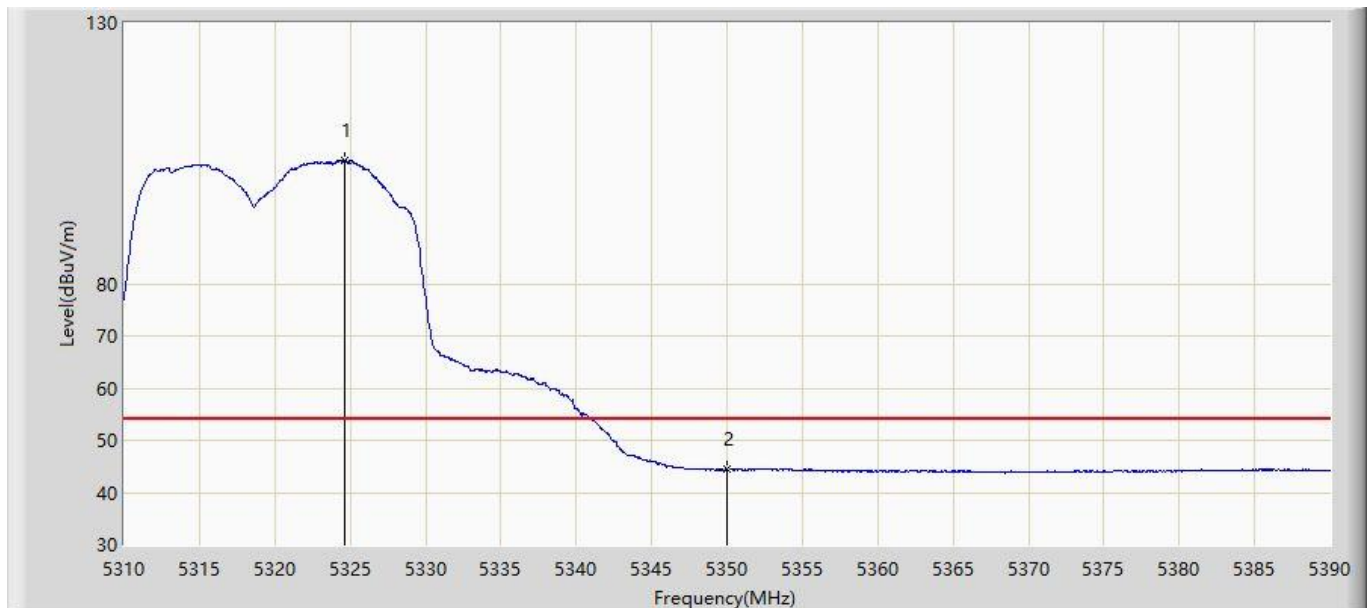


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5324.640        | 103.485                | 99.727               | N/A         | N/A            | 3.759       | AV   |
| 2  |      |      | 5350.000        | 44.385                 | 40.611               | -9.615      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 14:38 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz with OAW-AP1322 |                          |

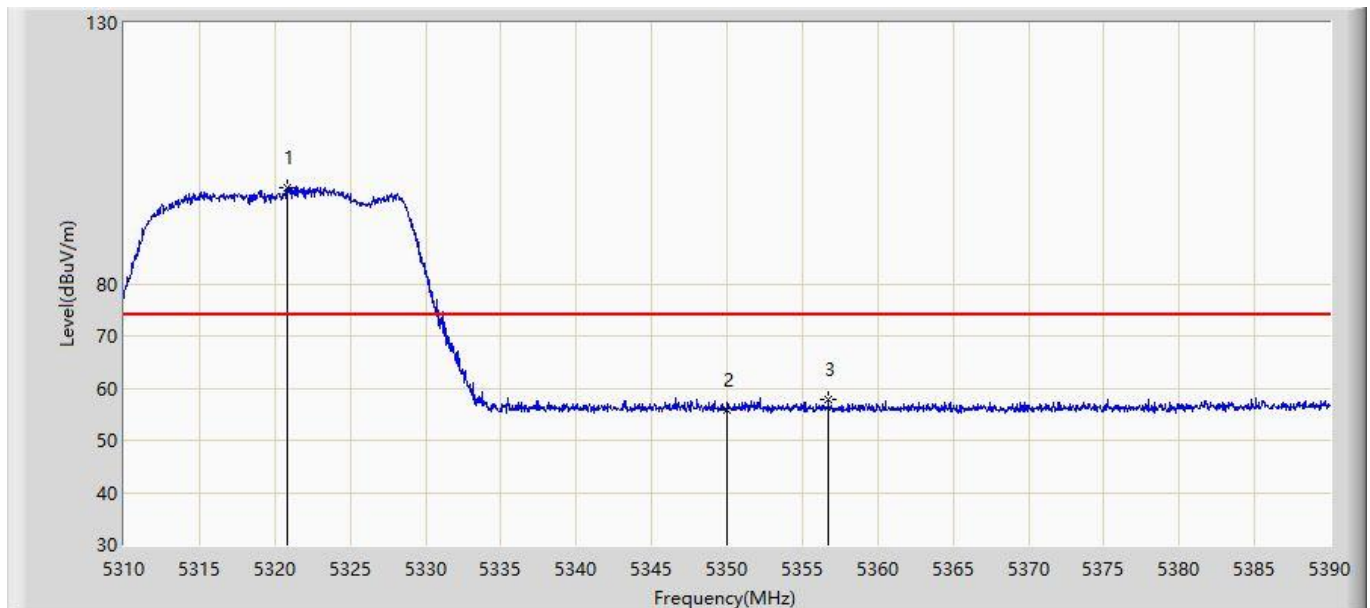


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5320.800        | 98.330                 | 94.574               | N/A         | N/A            | 3.757       | PK   |
| 2  |      |      | 5350.000        | 55.685                 | 51.911               | -18.315     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5356.720        | 57.859                 | 54.081               | -16.141     | 74.000         | 3.778       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 14:40 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz with OAW-AP1322 |                          |

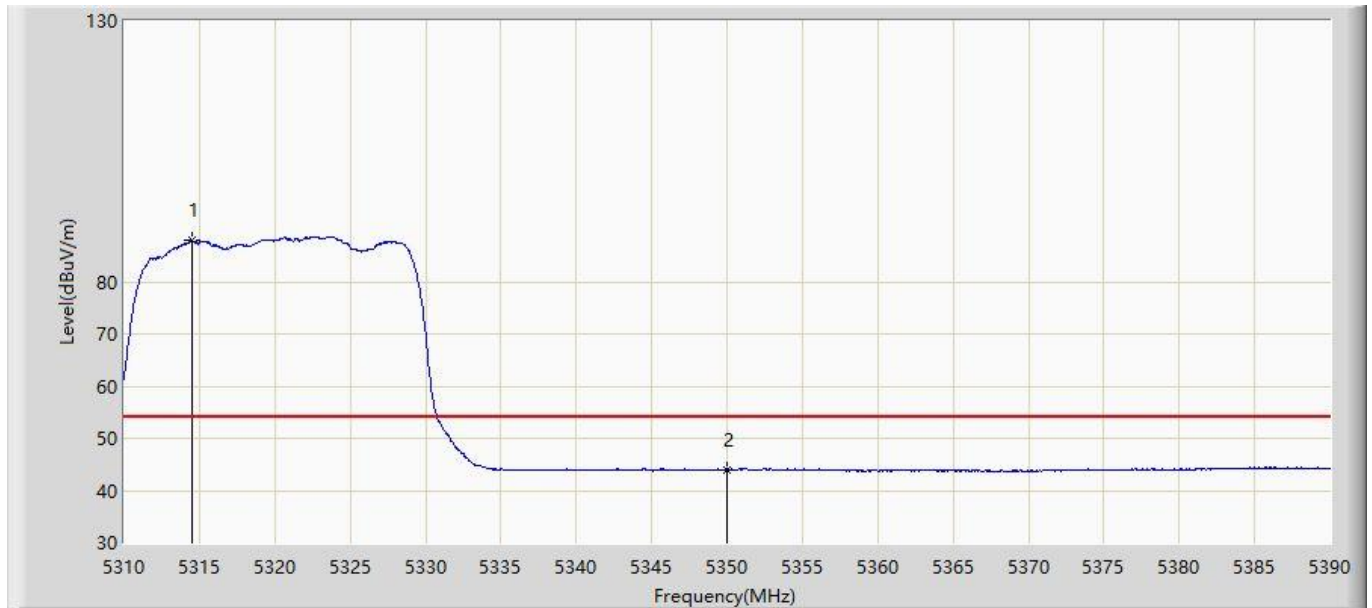


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5314.520        | 87.934                 | 84.182               | N/A         | N/A            | 3.752       | AV   |
| 2  |      |      | 5350.000        | 43.959                 | 40.185               | -10.041     | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 14:41 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz with OAW-AP1322 |                          |

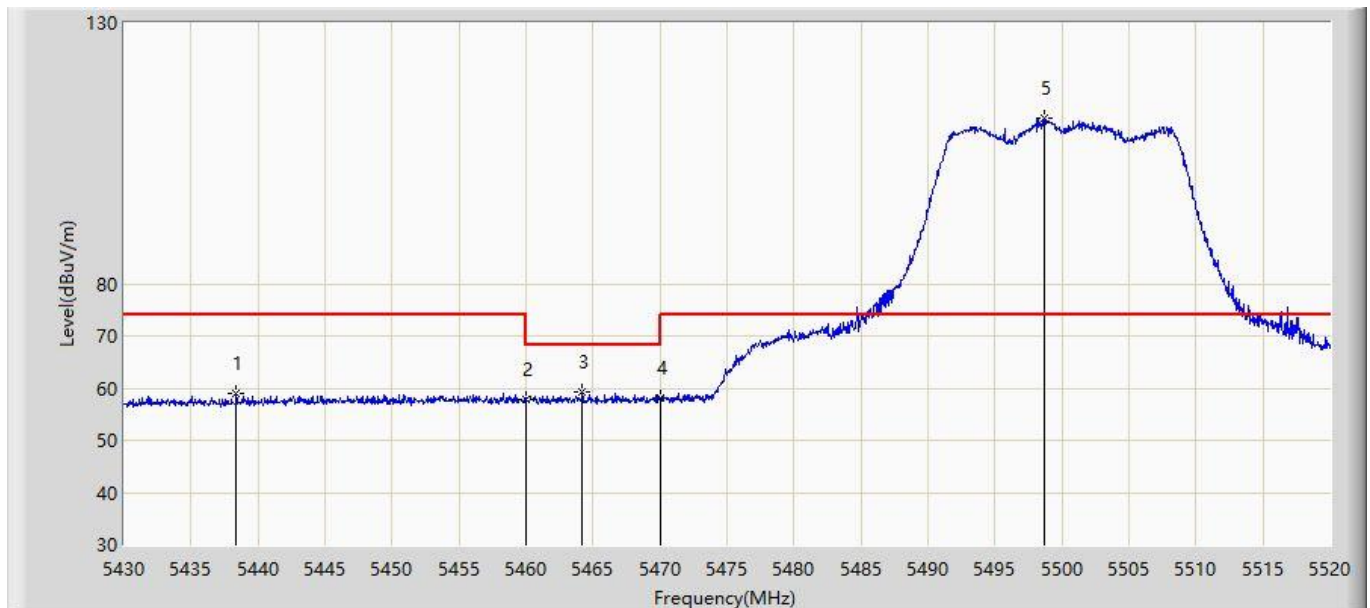


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5438.370        | 58.938                 | 55.108               | -15.062     | 74.000         | 3.830       | PK   |
| 2  |      |      | 5460.000        | 57.691                 | 53.847               | -16.309     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5464.200        | 59.247                 | 55.400               | -8.953      | 68.200         | 3.847       | PK   |
| 4  |      |      | 5470.000        | 58.061                 | 54.210               | -10.139     | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5498.670        | 111.611                | 107.731              | N/A         | N/A            | 3.879       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 14:54 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz with OAW-AP1322 |                          |

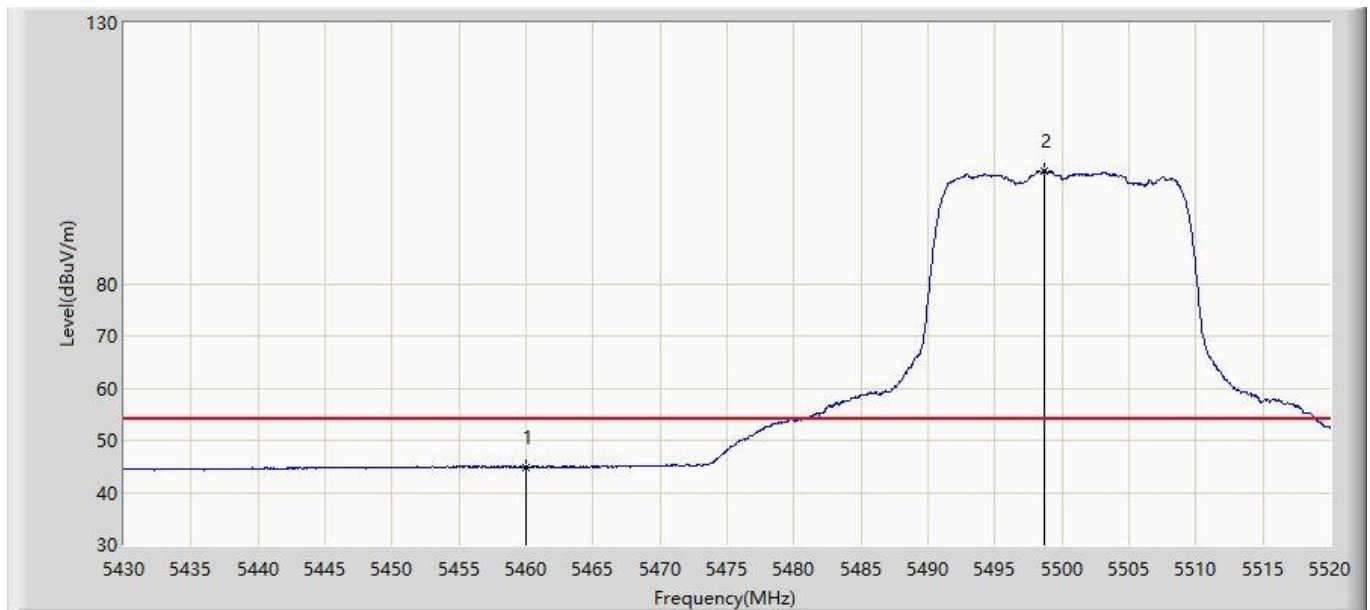


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.919                 | 41.075               | -9.081      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5498.670        | 101.661                | 97.781               | N/A         | N/A            | 3.879       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 15:10 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz with OAW-AP1322 |                          |

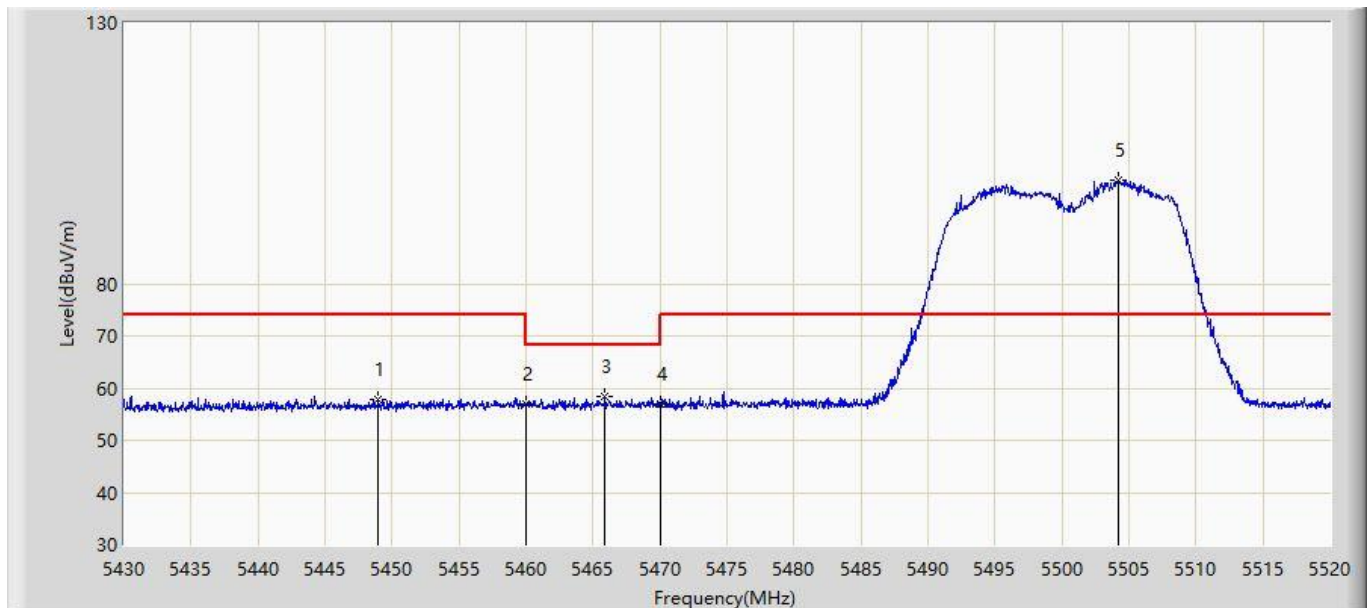


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5448.990        | 57.938                 | 54.101               | -16.062     | 74.000         | 3.837       | PK   |
| 2  |      |      | 5460.000        | 56.855                 | 53.011               | -17.145     | 74.000         | 3.844       | PK   |
| 3  |      |      | 5465.910        | 58.373                 | 54.525               | -9.827      | 68.200         | 3.848       | PK   |
| 4  |      |      | 5470.000        | 56.871                 | 53.020               | -11.329     | 68.200         | 3.850       | PK   |
| 5  |      | *    | 5504.160        | 99.862                 | 95.974               | N/A         | N/A            | 3.888       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 15:12 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz with OAW-AP1322 |                          |

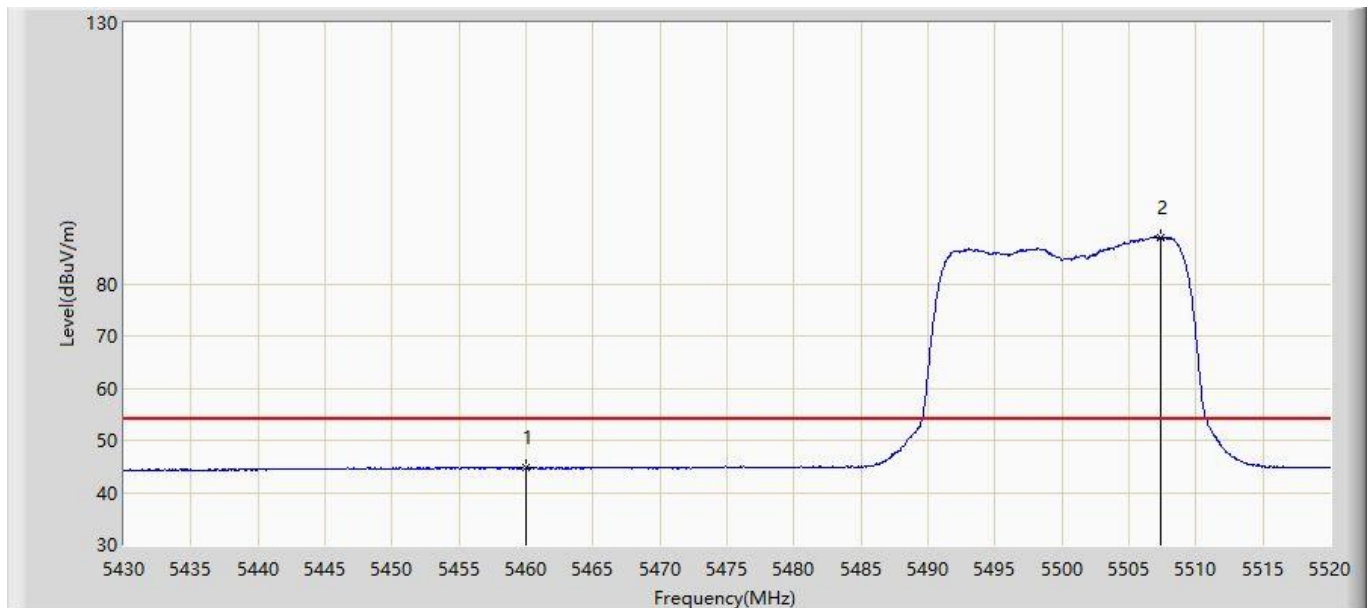


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 44.690                 | 40.846               | -9.310      | 54.000         | 3.844       | AV   |
| 2  |      | *    | 5507.355        | 88.858                 | 84.959               | N/A         | N/A            | 3.898       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 15:32 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz with OAW-AP1322 |                          |

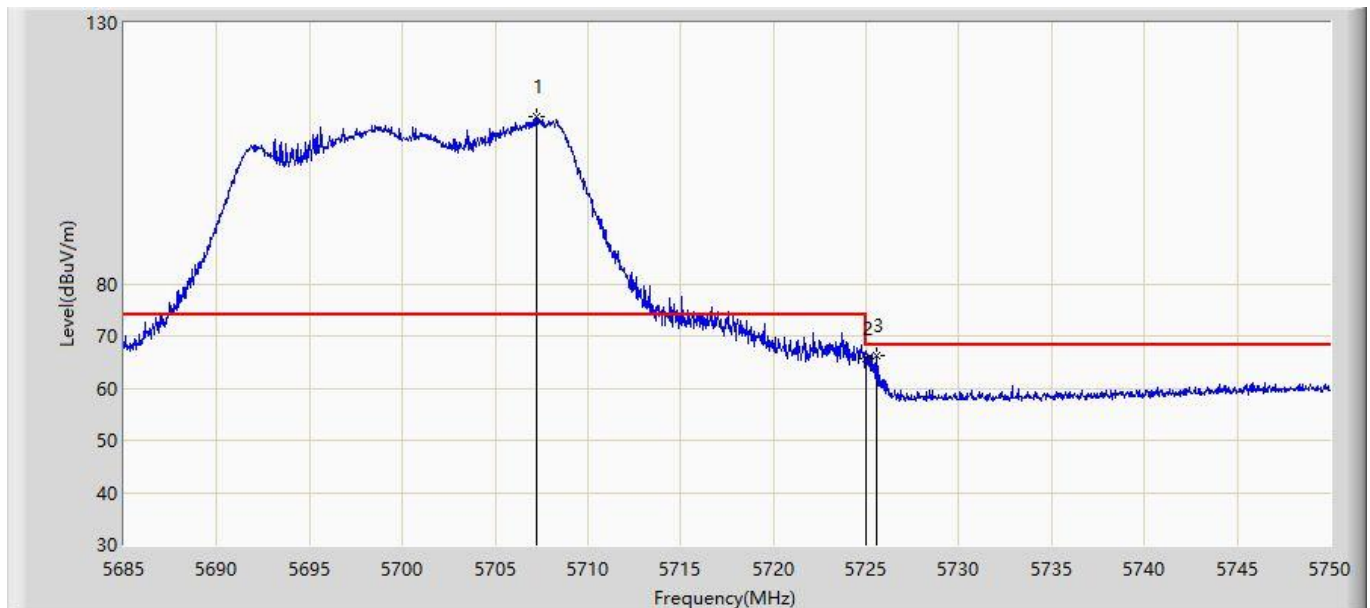


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5707.197        | 111.904                | 107.238              | N/A         | N/A            | 4.666       | PK   |
| 2  |      |      | 5725.000        | 65.528                 | 60.794               | -2.672      | 68.200         | 4.734       | PK   |
| 3  |      |      | 5725.592        | 66.111                 | 61.375               | -2.089      | 68.200         | 4.736       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 15:36 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz with OAW-AP1322 |                          |

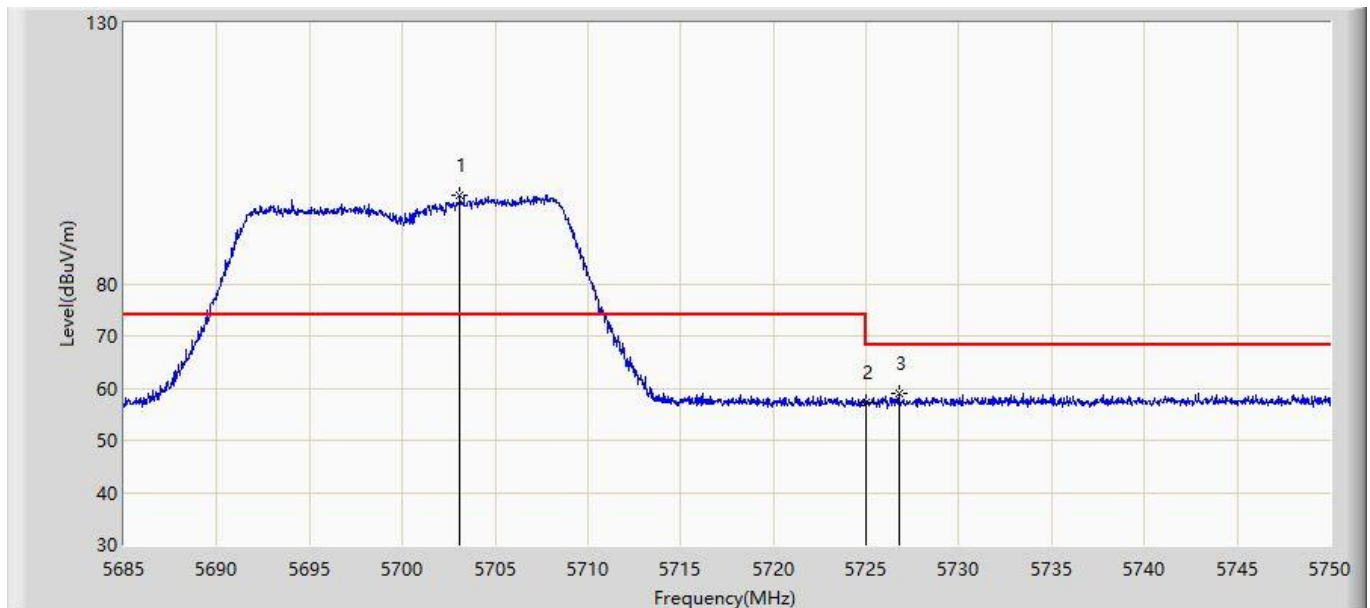


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5703.103        | 96.940                 | 92.290               | N/A         | N/A            | 4.651       | PK   |
| 2  |      |      | 5725.000        | 57.340                 | 52.606               | -10.860     | 68.200         | 4.734       | PK   |
| 3  |      |      | 5726.763        | 58.943                 | 54.202               | -9.257      | 68.200         | 4.740       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 15:39 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz with OAW-AP1322 |                          |

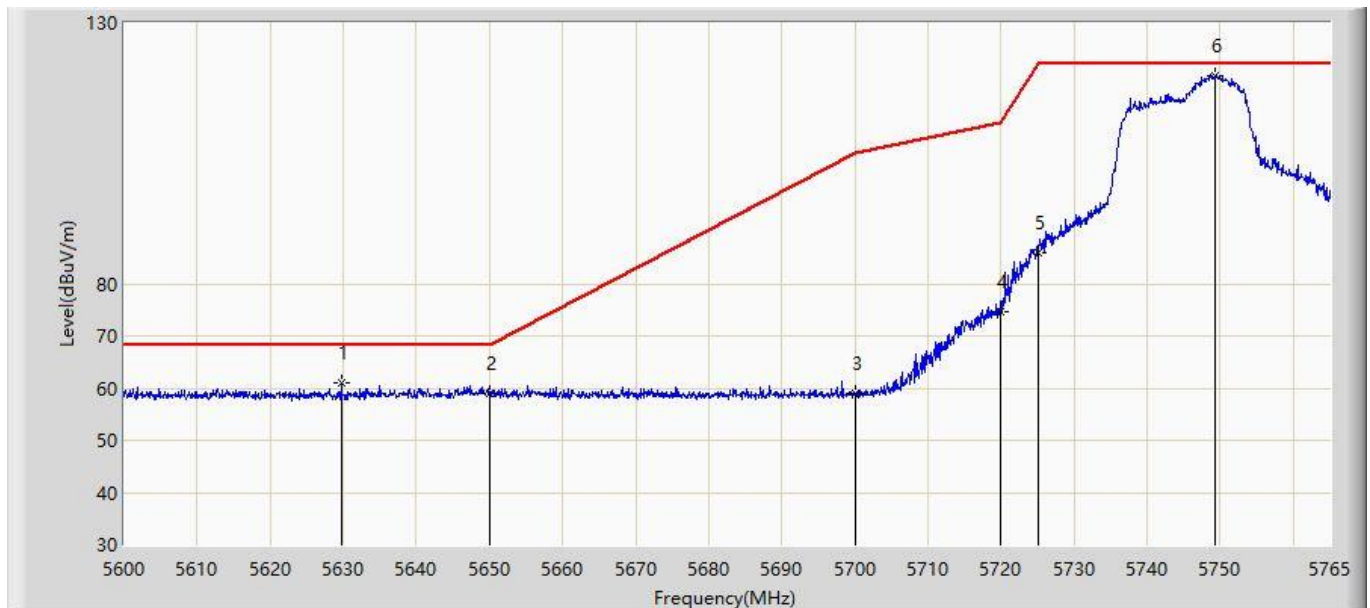


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5629.700        | 60.949                 | 56.581               | -7.251      | 68.200         | 4.368       | PK   |
| 2  |      |      | 5650.000        | 58.924                 | 54.478               | -9.276      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 58.929                 | 54.291               | -46.271     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 74.634                 | 69.919               | -36.166     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 86.028                 | 81.294               | -36.172     | 122.200        | 4.734       | PK   |
| 6  |      | *    | 5749.243        | 119.963                | 115.136              | N/A         | N/A            | 4.826       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 15:41 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz with OAW-AP1322 |                          |

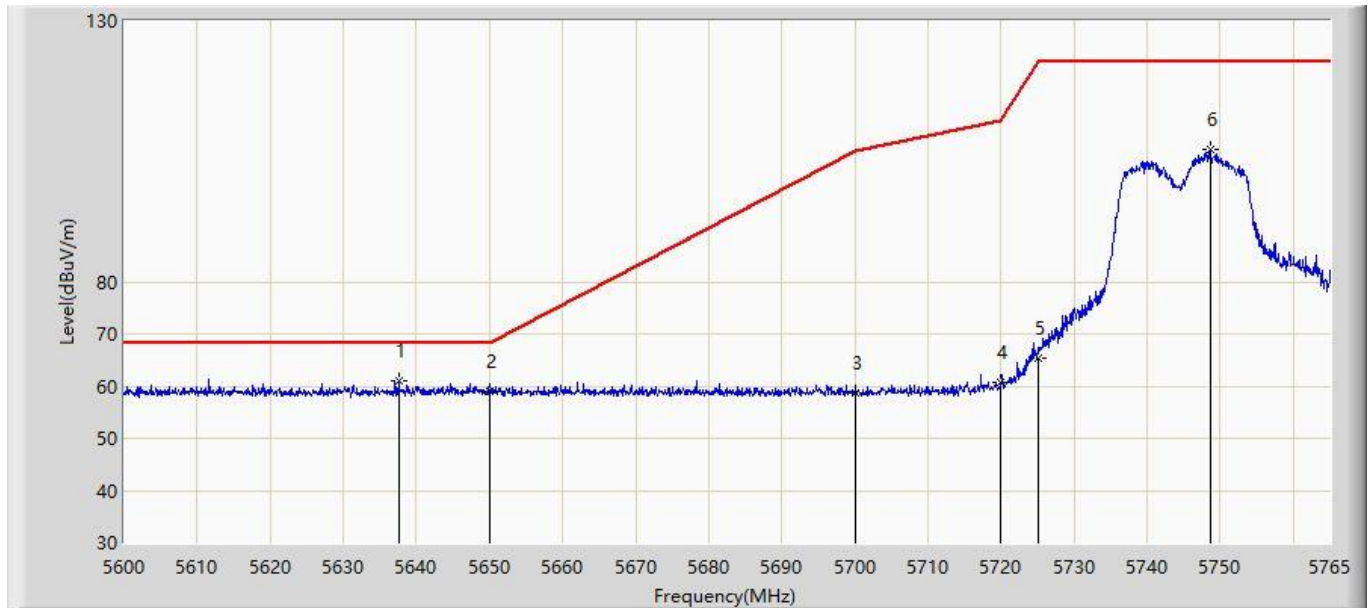


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5637.538        | 61.002                 | 56.603               | -7.198      | 68.200         | 4.399       | PK   |
| 2  |      |      | 5650.000        | 59.101                 | 54.655               | -9.099      | 68.200         | 4.446       | PK   |
| 3  |      |      | 5700.000        | 58.618                 | 53.980               | -46.582     | 105.200        | 4.638       | PK   |
| 4  |      |      | 5720.000        | 60.581                 | 55.866               | -50.219     | 110.800        | 4.715       | PK   |
| 5  |      |      | 5725.000        | 65.440                 | 60.706               | -56.760     | 122.200        | 4.734       | PK   |
| 6  |      |      | 5748.583        | 105.335                | 100.511              | N/A         | N/A            | 4.824       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 15:44 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz with OAW-AP1322 |                          |

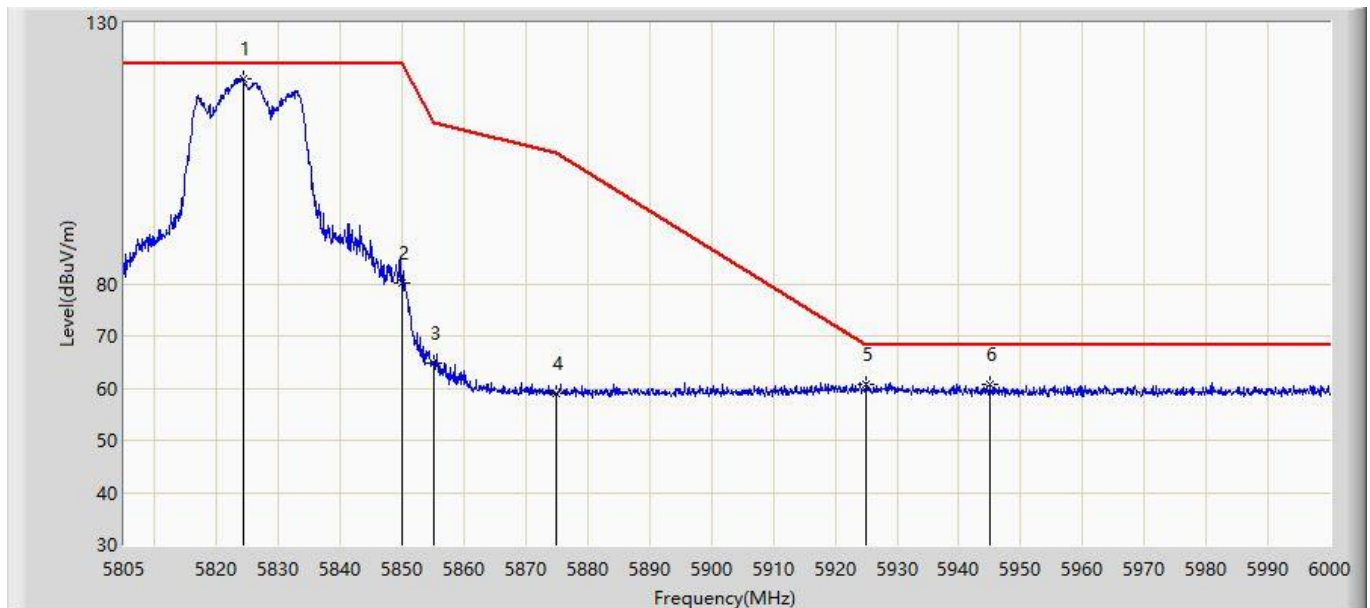


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5824.208        | 119.327                | 114.212              | N/A         | N/A            | 5.115       | PK   |
| 2  |      |      | 5850.000        | 80.200                 | 74.986               | -42.000     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 64.919                 | 59.686               | -45.881     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 58.902                 | 53.592               | -46.298     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 60.799                 | 55.297               | -7.401      | 68.200         | 5.502       | PK   |
| 6  |      |      | 5944.913        | 60.847                 | 55.268               | -7.353      | 68.200         | 5.579       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/22 - 15:56 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz with OAW-AP1322 |                          |

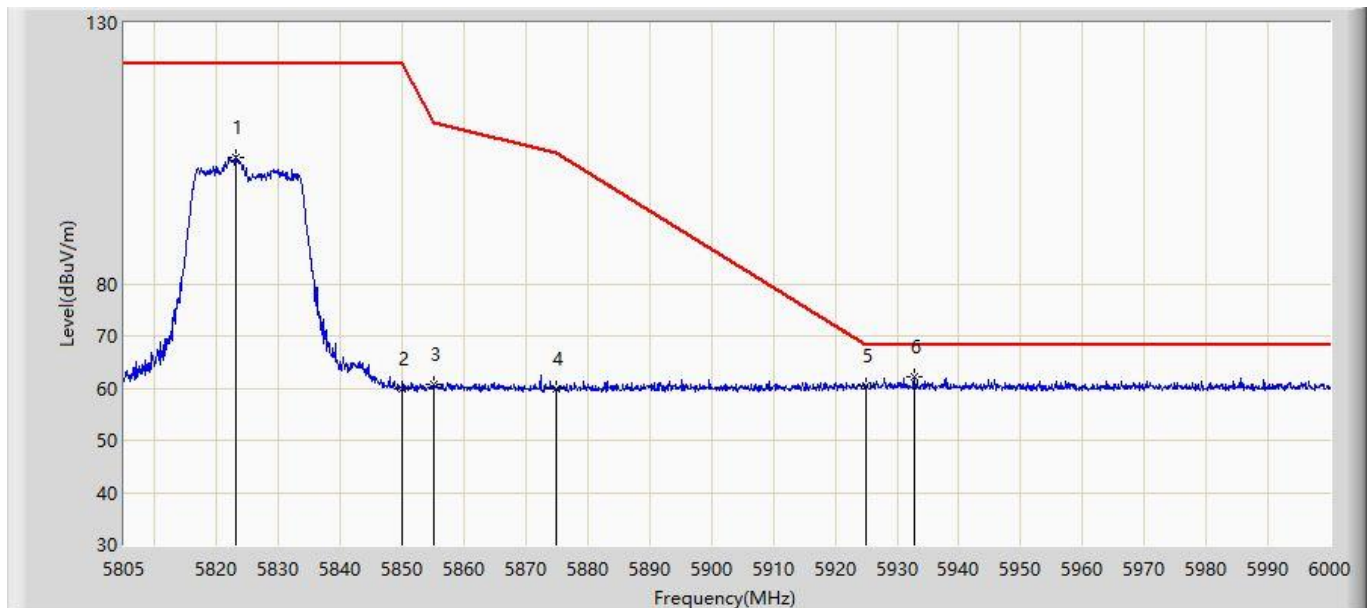


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5823.038        | 104.347                | 99.236               | N/A         | N/A            | 5.111       | PK   |
| 2  |      |      | 5850.000        | 59.940                 | 54.726               | -62.260     | 122.200        | 5.214       | PK   |
| 3  |      |      | 5855.000        | 60.591                 | 55.358               | -50.209     | 110.800        | 5.233       | PK   |
| 4  |      |      | 5875.000        | 59.901                 | 54.591               | -45.299     | 105.200        | 5.310       | PK   |
| 5  |      |      | 5925.000        | 60.452                 | 54.950               | -7.748      | 68.200         | 5.502       | PK   |
| 6  |      | *    | 5932.725        | 62.258                 | 56.726               | -5.942      | 68.200         | 5.532       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/23 - 10:22 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz with OAW-AP1322 |                          |

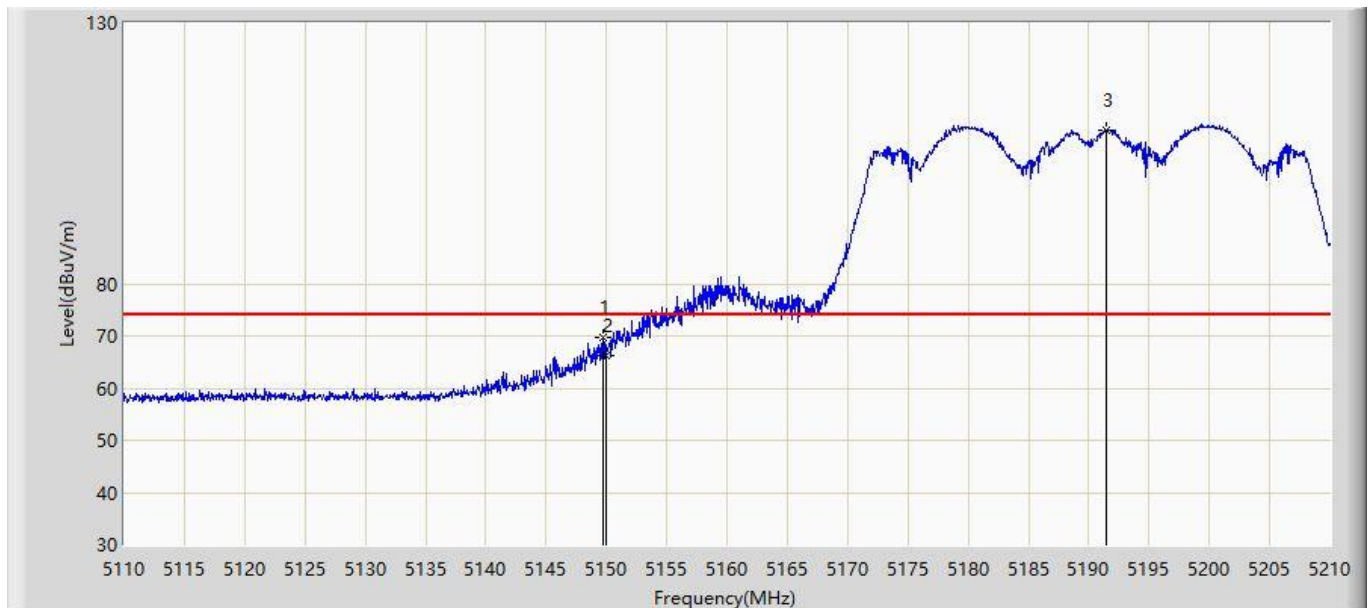


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.750        | 69.610                 | 65.964               | -4.390      | 74.000         | 3.646       | PK   |
| 2  |      |      | 5150.000        | 66.208                 | 62.562               | -7.792      | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5191.450        | 109.406                | 105.733              | N/A         | N/A            | 3.673       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/23 - 10:25 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz with OAW-AP1322 |                          |

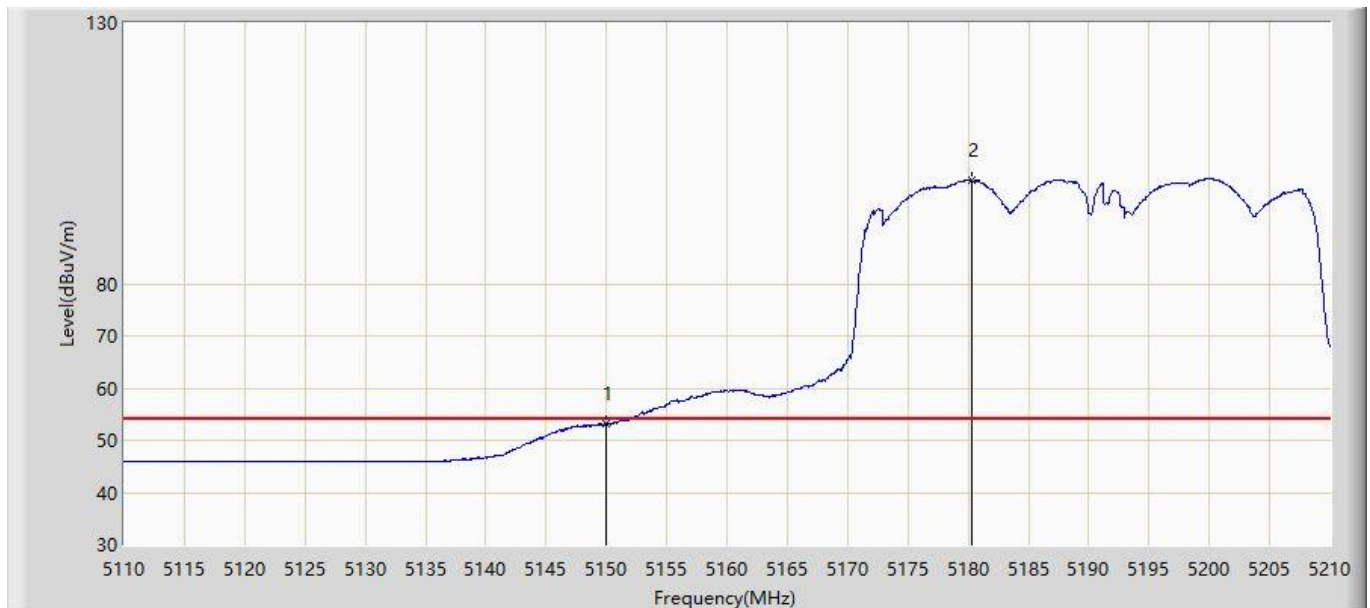


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.075                 | 49.429               | -0.925      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5180.250        | 99.798                 | 96.133               | N/A         | N/A            | 3.665       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/23 - 10:30 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz with OAW-AP1322 |                          |

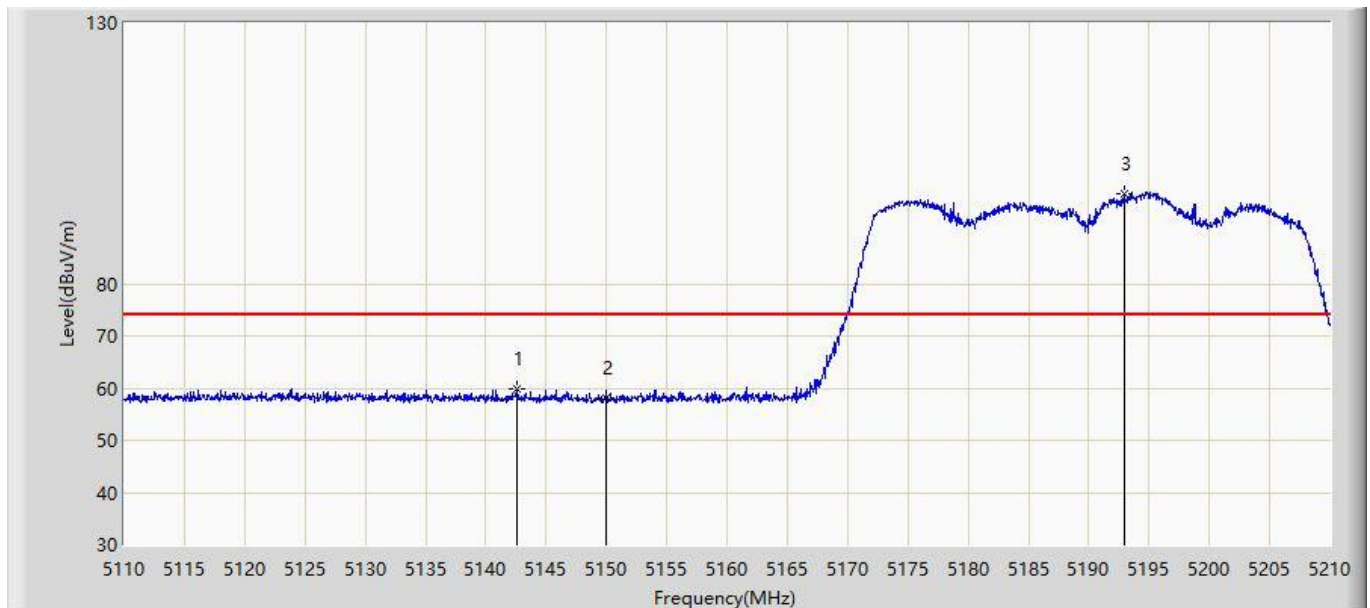


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5142.600        | 59.728                 | 56.087               | -14.272     | 74.000         | 3.641       | PK   |
| 2  |      |      | 5150.000        | 58.195                 | 54.549               | -15.805     | 74.000         | 3.646       | PK   |
| 3  |      | *    | 5192.950        | 97.355                 | 93.681               | N/A         | N/A            | 3.673       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/23 - 10:32 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz with OAW-AP1322 |                          |

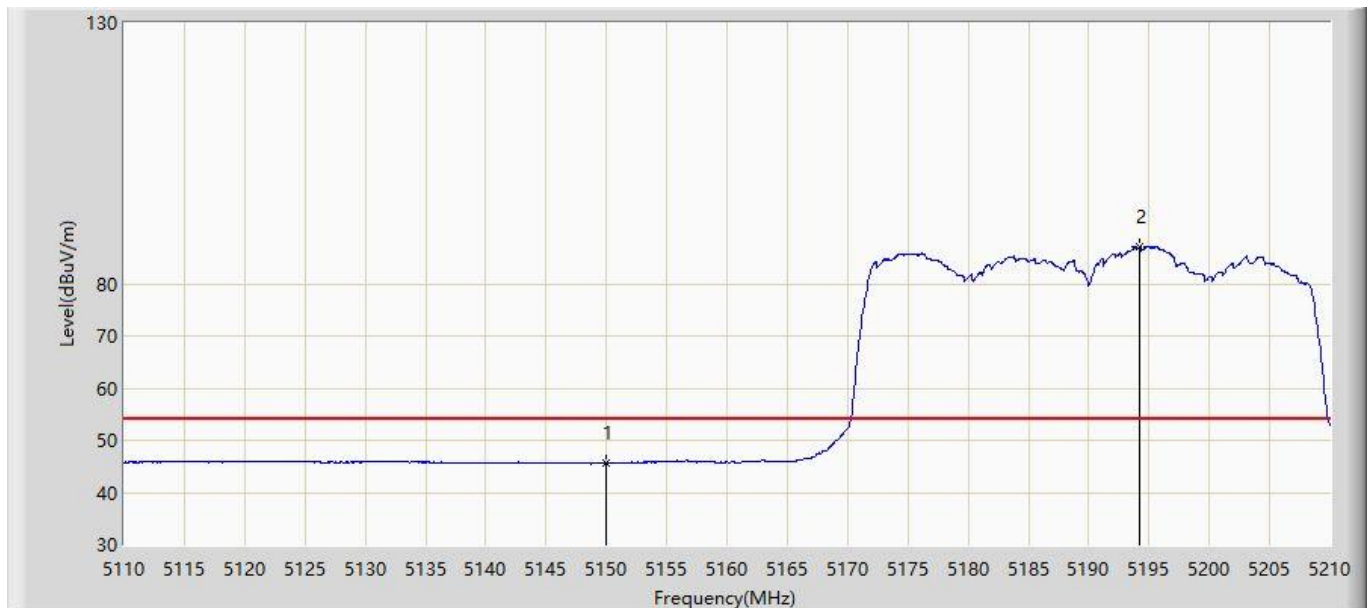


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.654                 | 42.008               | -8.346      | 54.000         | 3.646       | AV   |
| 2  |      | *    | 5194.150        | 87.001                 | 83.327               | N/A         | N/A            | 3.674       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/23 - 10:41 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz with OAW-AP1322 |                          |

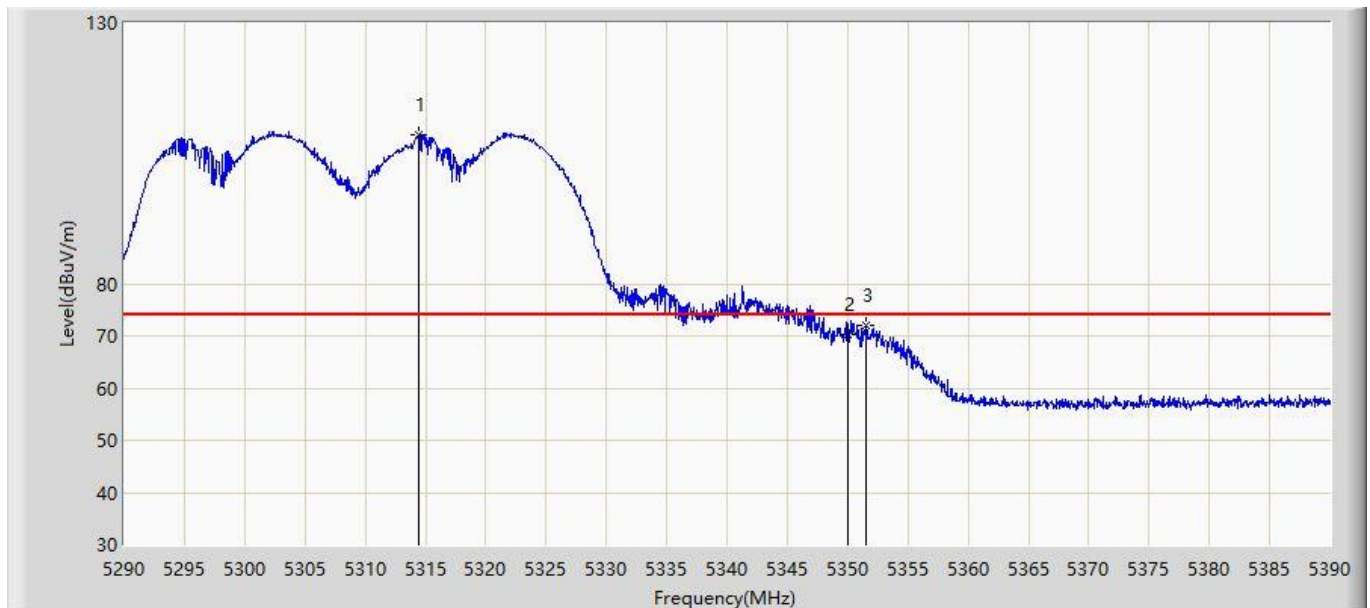


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5314.450        | 108.433                | 104.681              | N/A         | N/A            | 3.752       | PK   |
| 2  |      |      | 5350.000        | 70.306                 | 66.532               | -3.694      | 74.000         | 3.774       | PK   |
| 3  |      |      | 5351.550        | 72.167                 | 68.392               | -1.833      | 74.000         | 3.775       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/23 - 10:39 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Horizontal     |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz with OAW-AP1322 |                          |

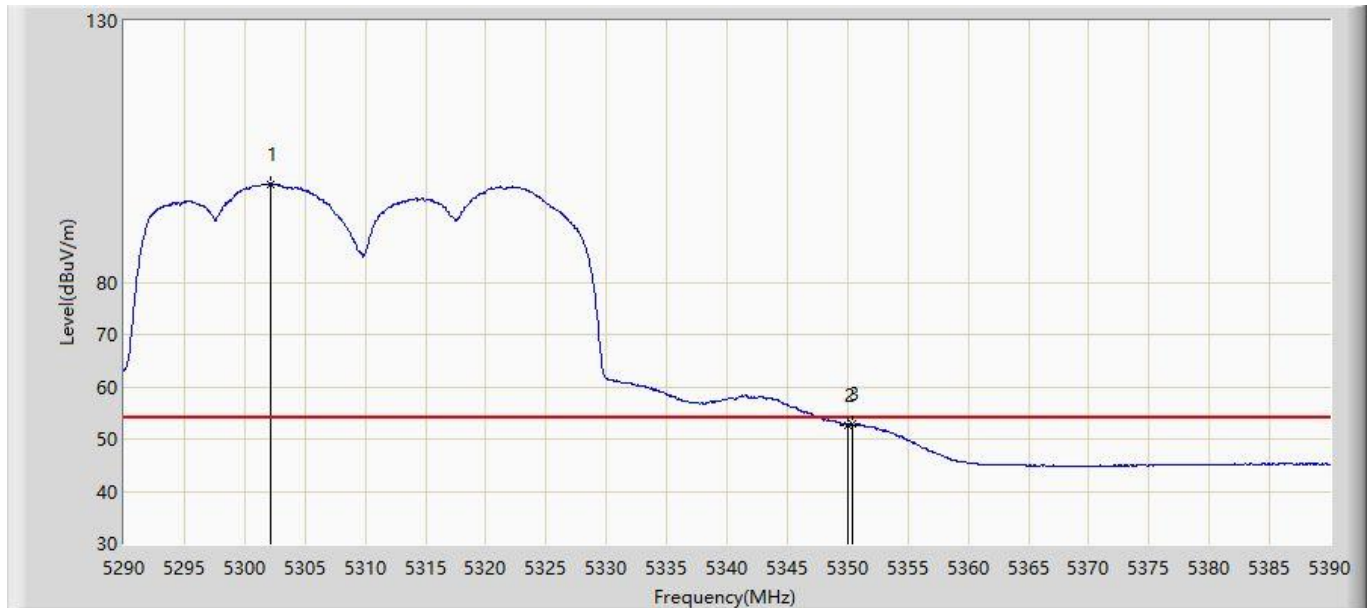


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5302.150        | 98.794                 | 95.051               | N/A         | N/A            | 3.743       | AV   |
| 2  |      |      | 5350.000        | 52.726                 | 48.952               | -1.274      | 54.000         | 3.774       | AV   |
| 3  |      |      | 5350.450        | 52.877                 | 49.103               | -1.123      | 54.000         | 3.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                              | Time: 2020/03/23 - 10:42 |
| Limit: NCC LP0002_1GHz-40GHz                                           | Engineer: Peter Syu      |
| Probe: BBHA 9120D_1-18GHz_2019                                         | Polarity: Vertical       |
| EUT: 無線基地台                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz with OAW-AP1322 |                          |

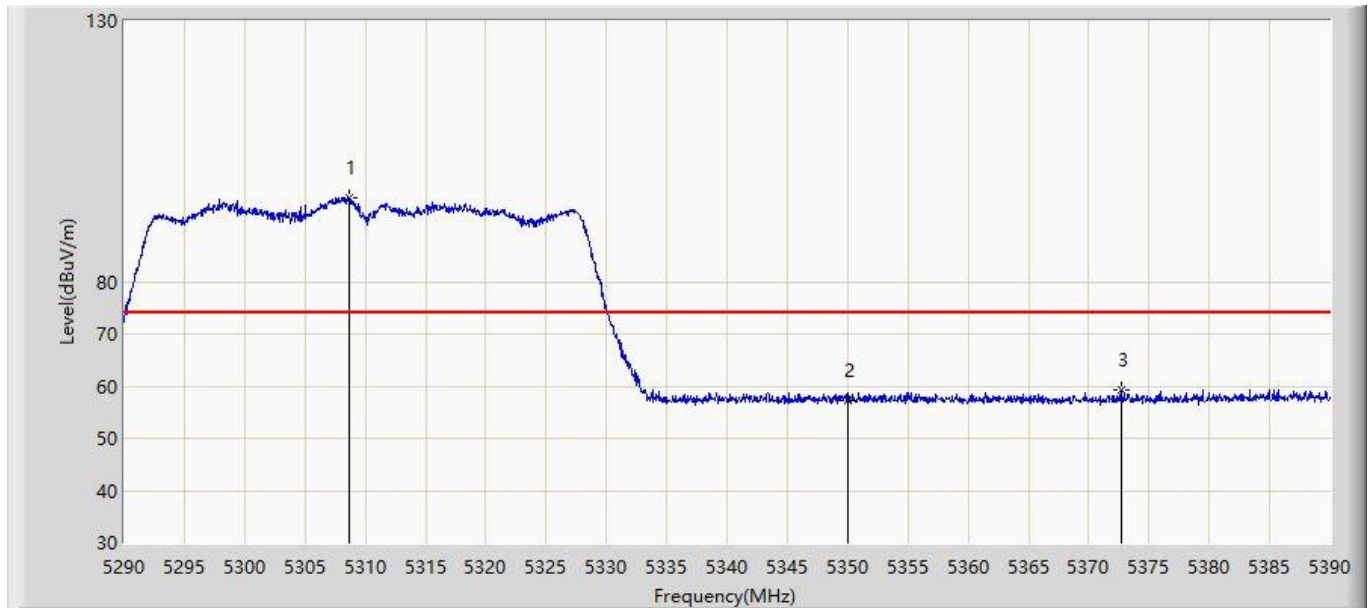

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5308.700        | 96.172                 | 92.424               | N/A         | N/A            | 3.748       | PK   |
| 2  |      |      | 5350.000        | 57.280                 | 53.506               | -16.720     | 74.000         | 3.774       | PK   |
| 3  |      |      | 5372.650        | 59.291                 | 55.502               | -14.709     | 74.000         | 3.788       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)