


測試頻道: IEEE 802.11n (HT40) /
2427 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

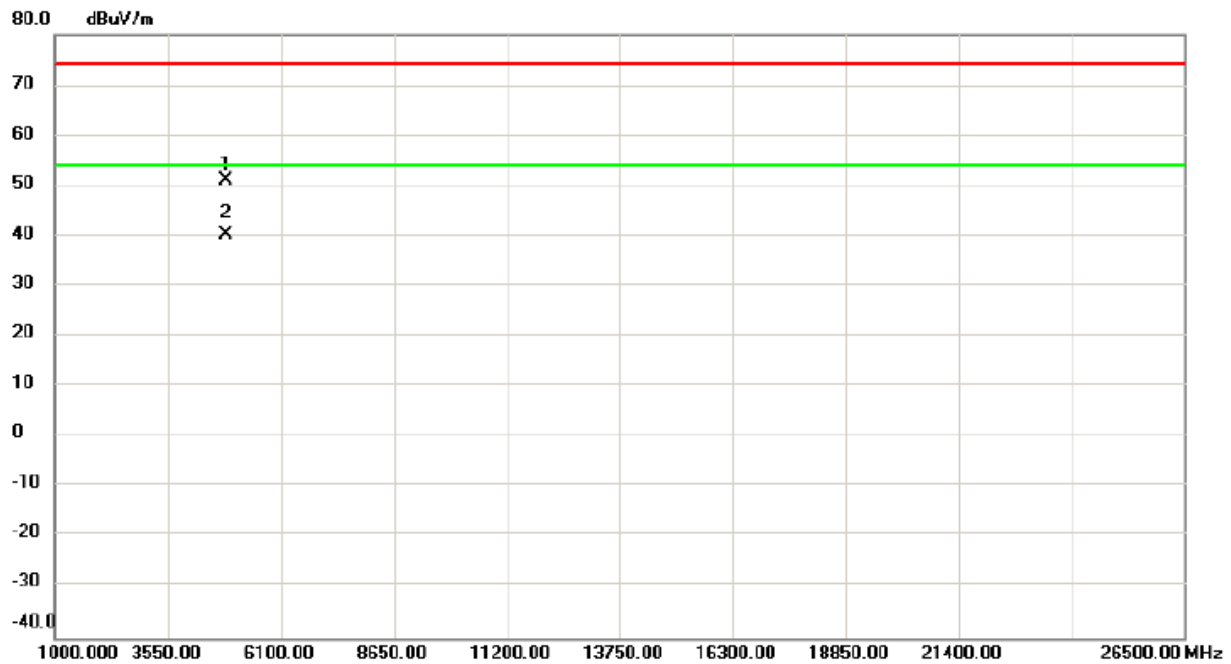


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4856.790	62.98	-12.01	50.97	74.00	-23.03	peak	
2	*	4858.245	52.33	-12.01	40.32	54.00	-13.68	AVG	

測試頻道: IEEE 802.11n (HT40) /
2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

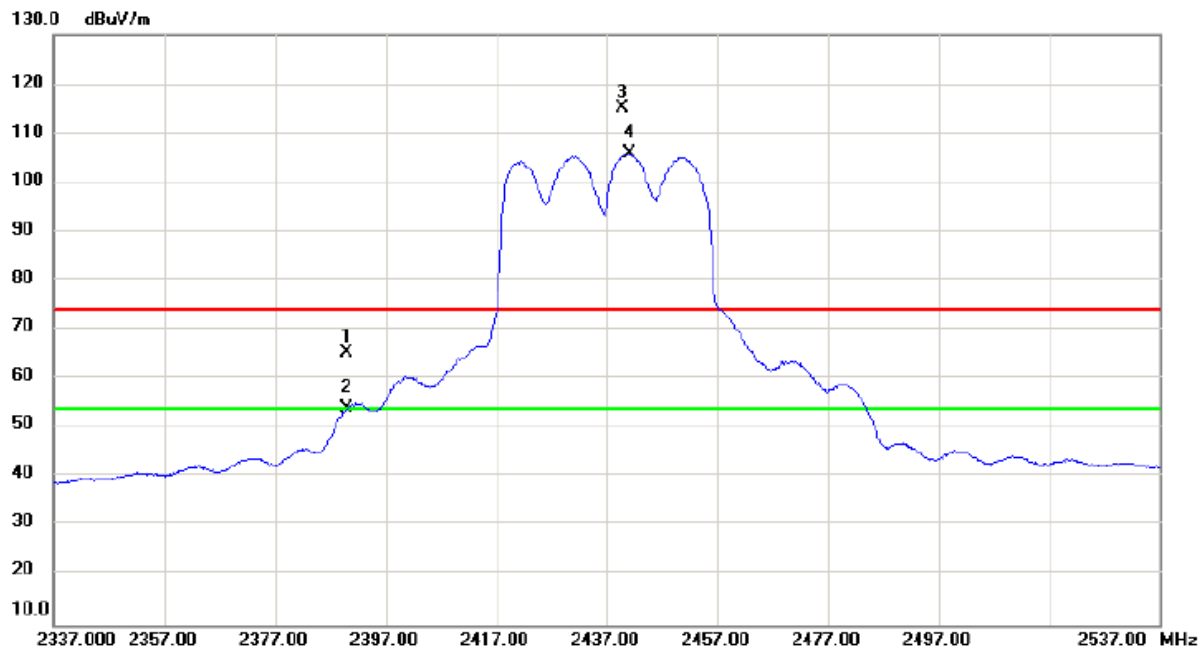

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	72.45	-7.23	65.22	74.00	-8.78	peak	
2		2390.000	61.19	-7.23	53.96	54.00	-0.04	AVG	
3	X	2439.700	122.24	-7.02	115.22	74.00	41.22	peak	主波訊號不予判定
4	*	2441.100	112.89	-7.01	105.88	54.00	51.88	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

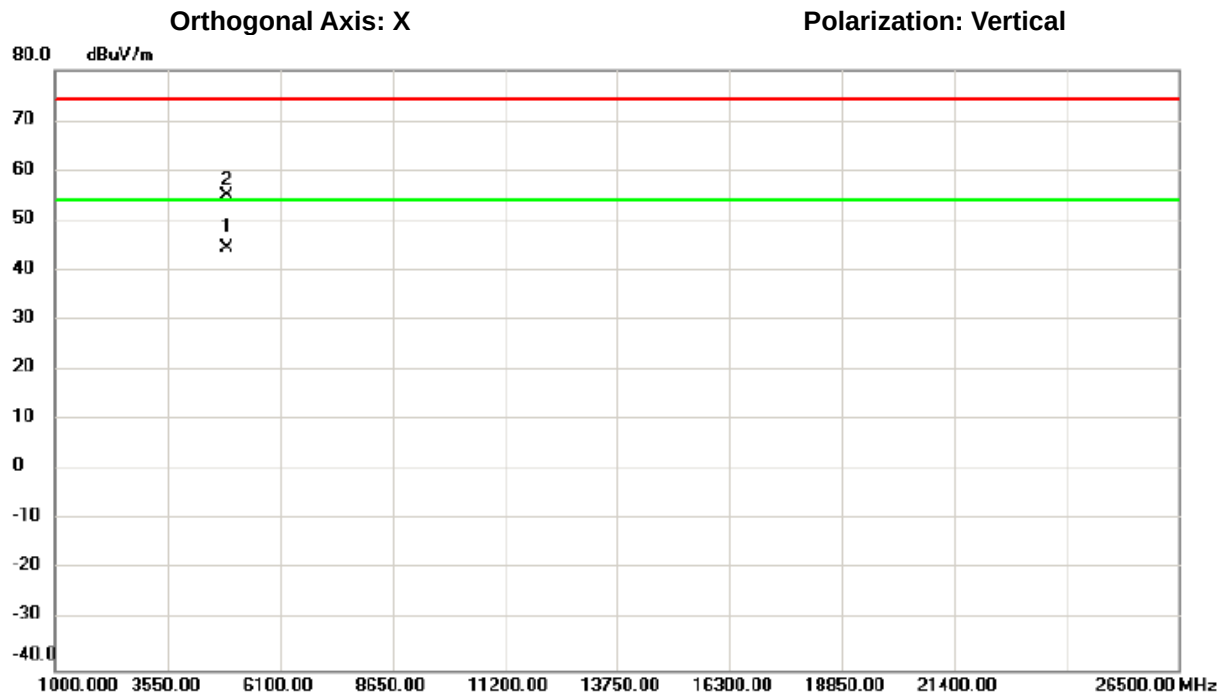


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4878.120	56.58	-11.99	44.59	54.00	-9.41	AVG	
2		4878.565	66.86	-11.98	54.88	74.00	-19.12	peak	

測試頻道: IEEE 802.11n (HT40) /
2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

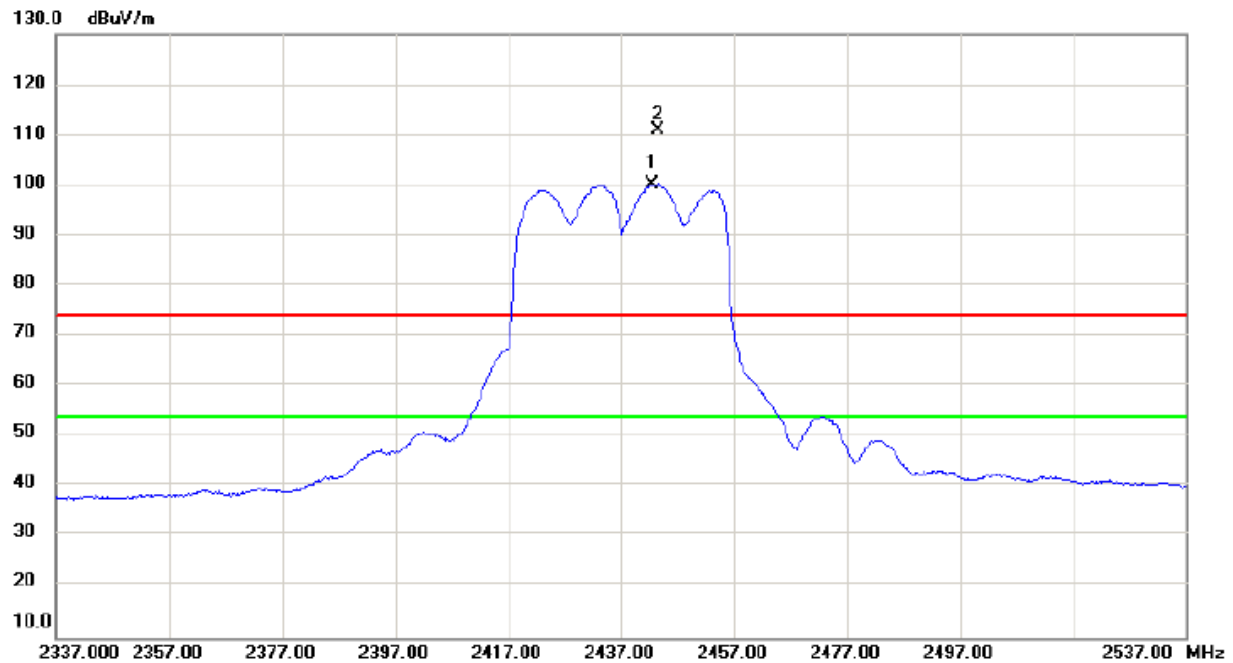

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2442.600	107.27	-7.01	100.26	54.00	46.26	AVG	主波訊號不予判定
2	X	2443.500	118.05	-7.01	111.04	74.00	37.04	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

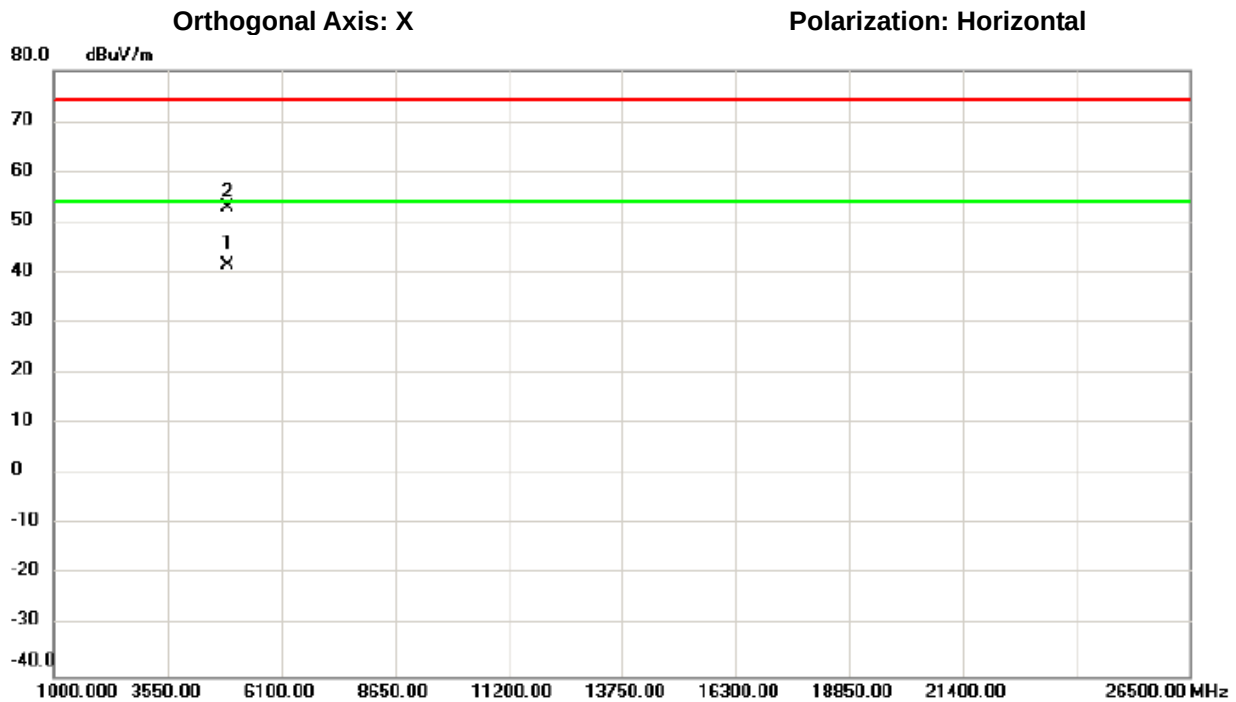

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4878.120	53.58	-11.99	41.59	54.00	-12.41	AVG	
2		4878.565	64.86	-11.98	52.88	74.00	-21.12	peak	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

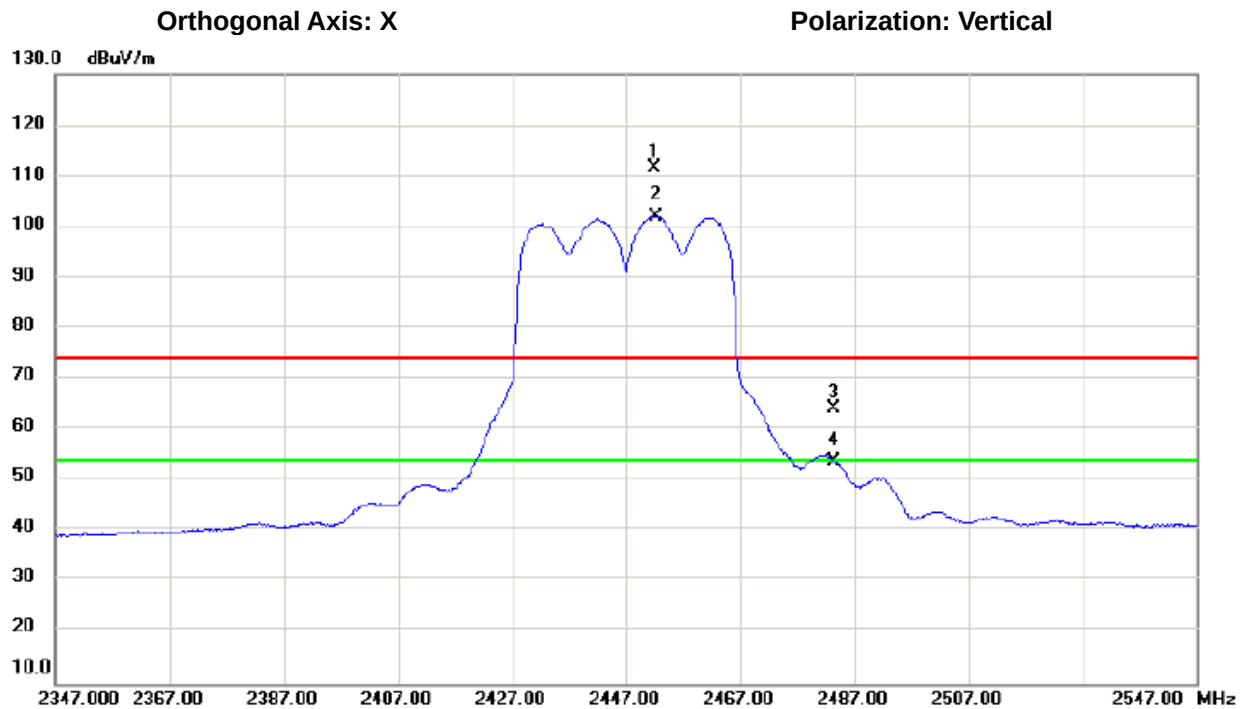

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2452.000	118.54	-6.98	111.56	74.00	37.56	peak	主波訊號不予判定
2	*	2452.200	109.05	-6.98	102.07	54.00	48.07	AVG	主波訊號不予判定
3		2483.500	70.94	-6.85	64.09	74.00	-9.91	peak	
4		2483.500	60.42	-6.85	53.57	54.00	-0.43	AVG	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

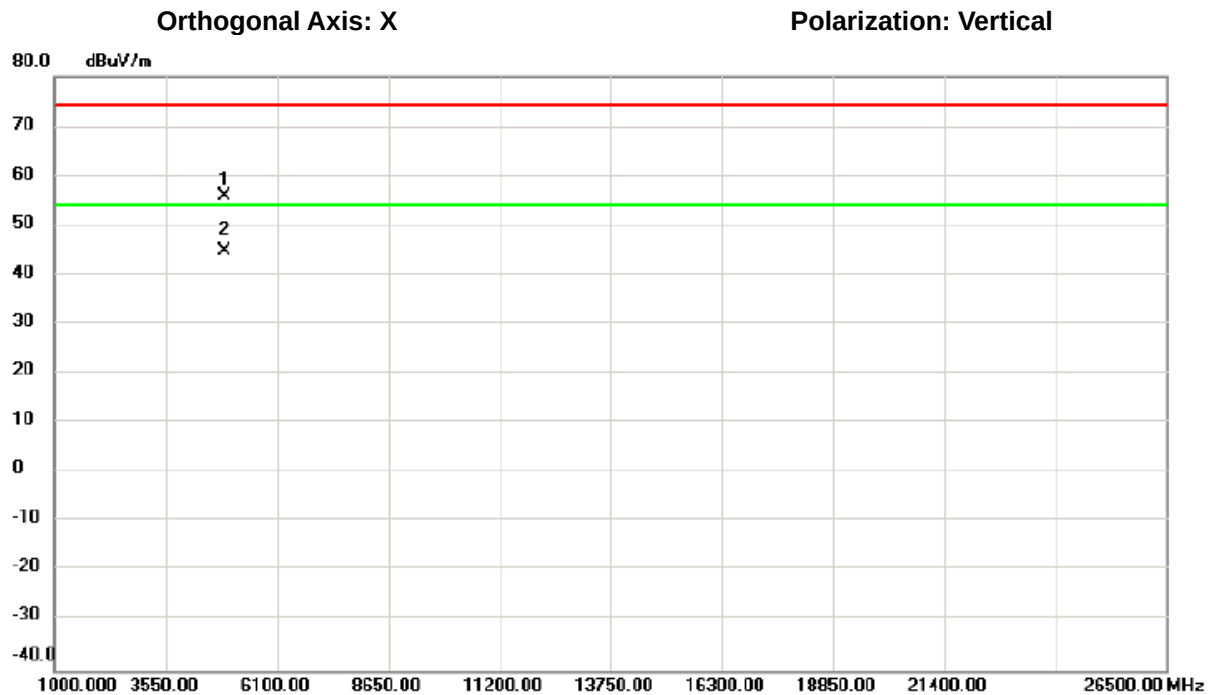

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4889.825	67.79	-11.97	55.82	74.00	-18.18	peak	
2	*	4897.775	56.82	-11.96	44.86	54.00	-9.14	AVG	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

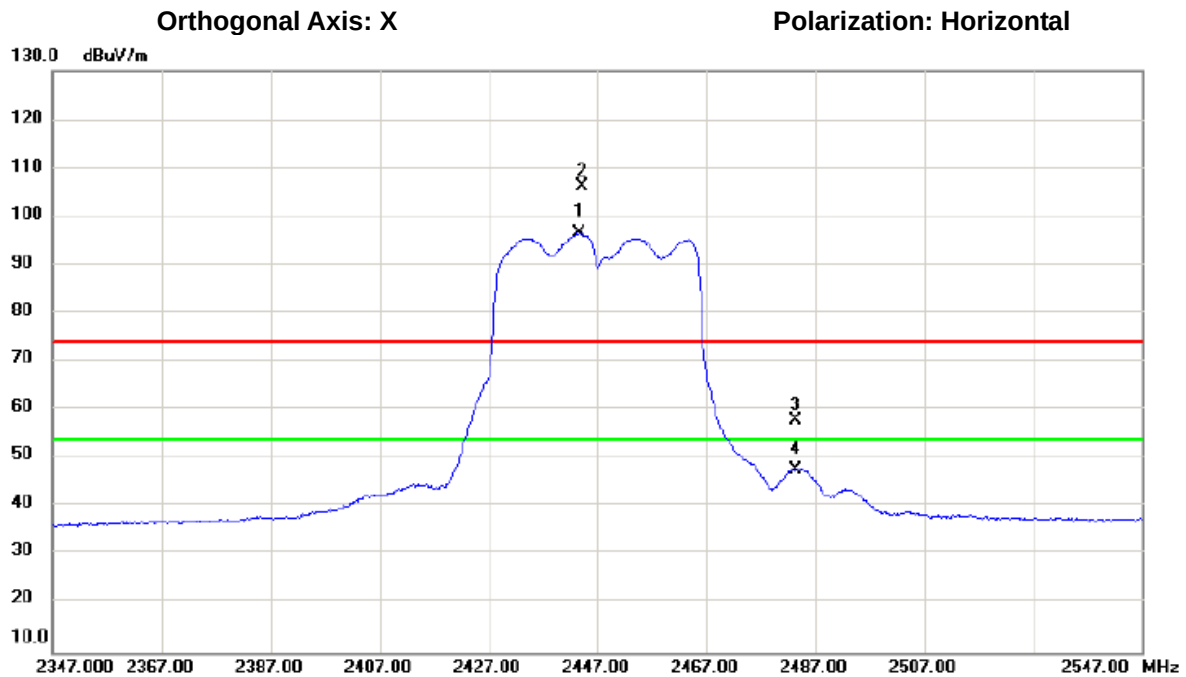

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2443.600	103.54	-7.01	96.53	54.00	42.53	AVG	主波訊號不予判定
2	X	2444.200	113.17	-7.01	106.16	74.00	32.16	peak	主波訊號不予判定
3		2483.500	64.63	-6.85	57.78	74.00	-16.22	peak	
4		2483.500	54.64	-6.85	47.79	54.00	-6.21	AVG	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

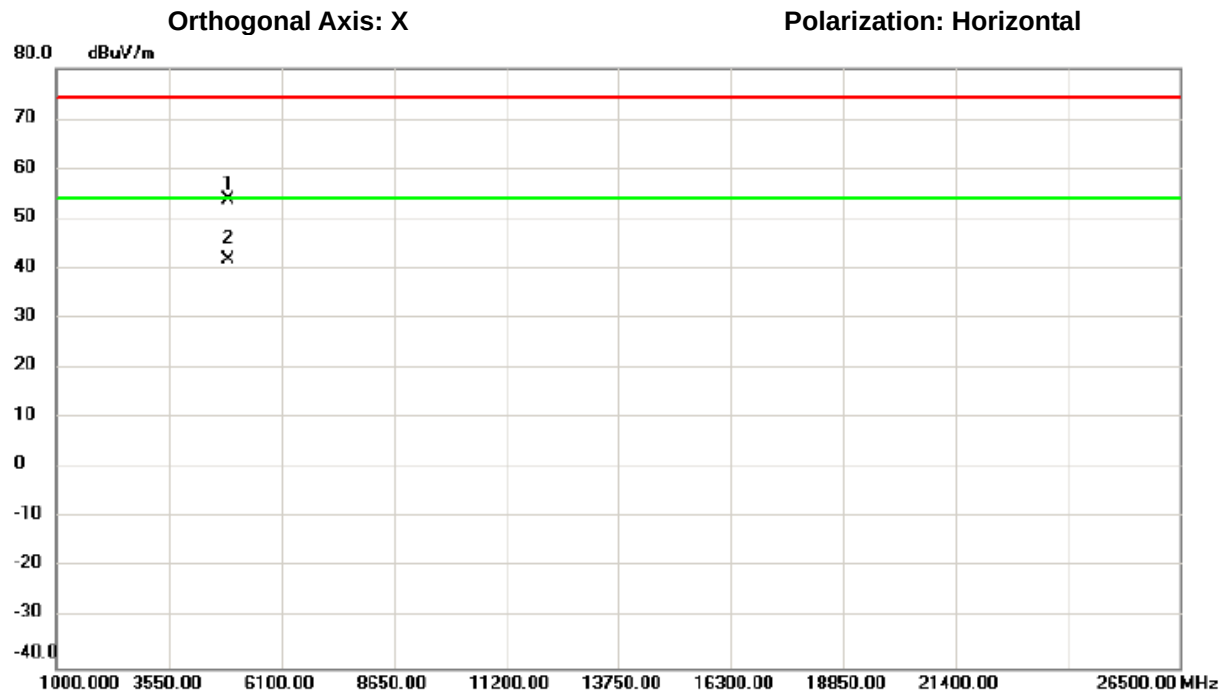

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4889.825	65.79	-11.97	53.82	74.00	-20.18	peak	
2	*	4897.775	53.82	-11.96	41.86	54.00	-12.14	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

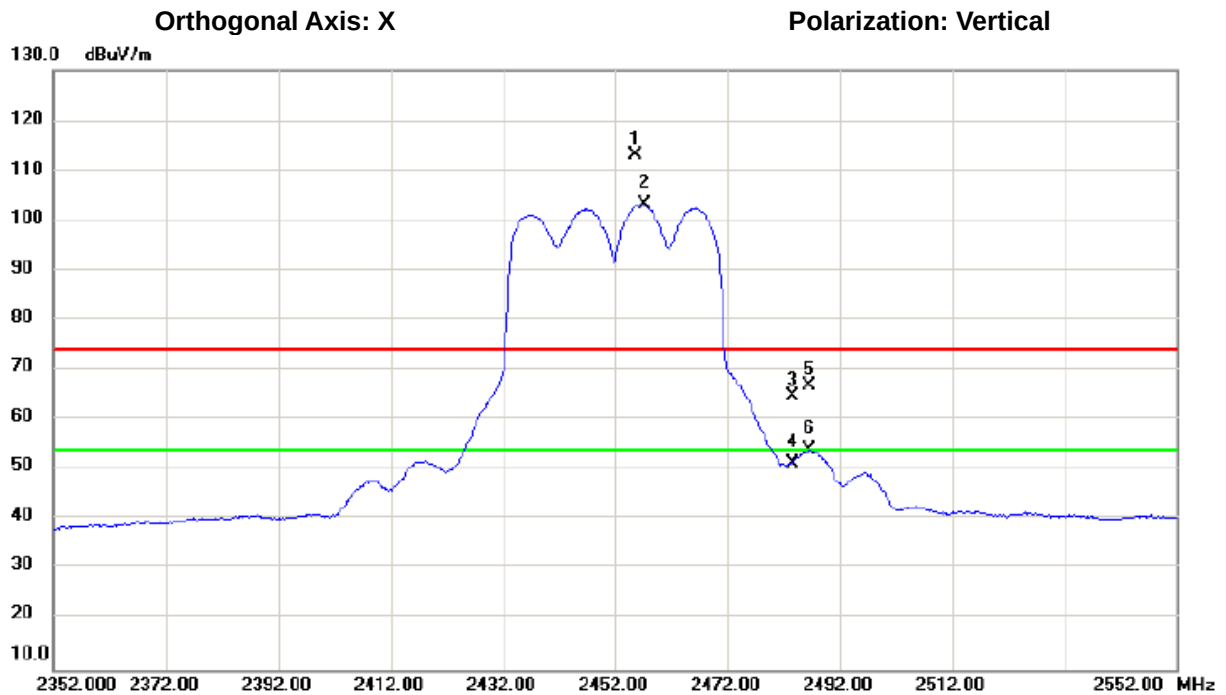

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2455.600	119.93	-6.95	112.98	74.00	38.98	peak	主波訊號不予判定
2	*	2457.200	110.13	-6.95	103.18	54.00	49.18	AVG	主波訊號不予判定
3		2483.500	71.63	-6.85	64.78	74.00	-9.22	peak	
4		2483.500	58.25	-6.85	51.40	54.00	-2.60	AVG	
5		2486.600	73.61	-6.84	66.77	74.00	-7.23	peak	
6		2486.600	60.76	-6.84	53.92	54.00	-0.08	AVG	

測試頻道: IEEE 802.11n (HT40) /
 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 3000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/10/29
 環境濕度: 66%

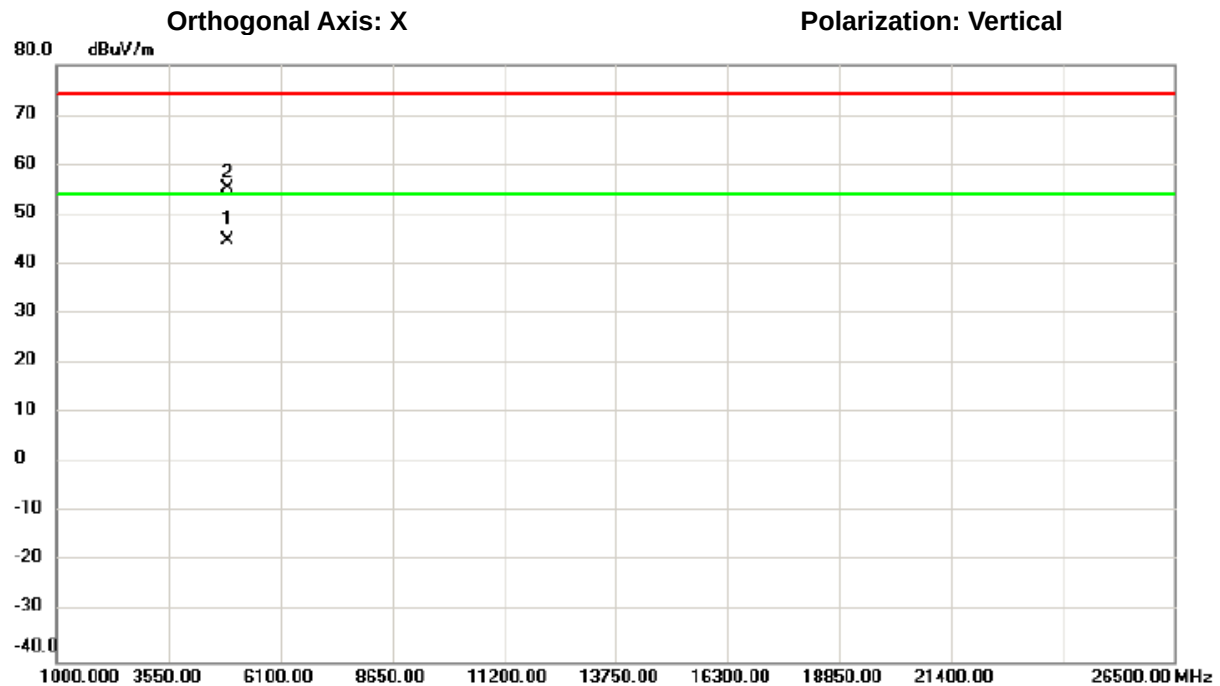


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4899.080	56.71	-11.96	44.75	54.00	-9.25	AVG	
2		4900.690	67.17	-11.96	55.21	74.00	-18.79	peak	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%


Orthogonal Axis: X

Polarization: Horizontal

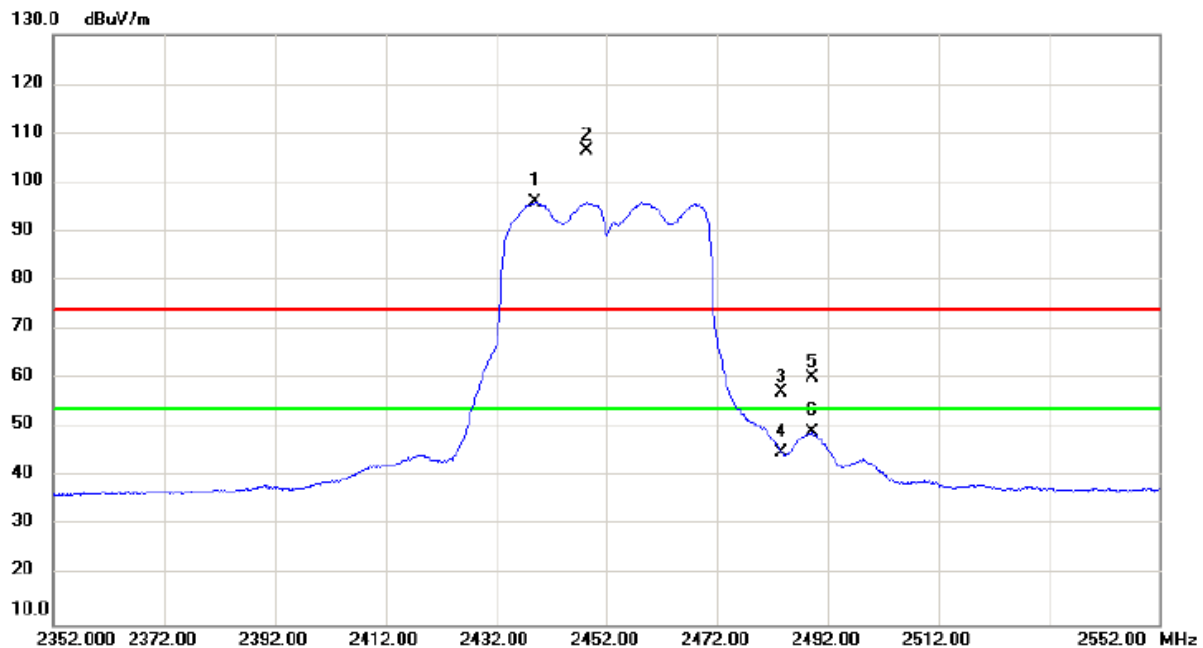

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2439.200	102.99	-7.02	95.97	54.00	41.97	AVG	主波訊號不予判定
2	X	2448.300	113.33	-6.99	106.34	74.00	32.34	peak	主波訊號不予判定
3		2483.500	64.03	-6.85	57.18	74.00	-16.82	peak	
4		2483.500	51.82	-6.85	44.97	54.00	-9.03	AVG	
5		2489.200	66.96	-6.83	60.13	74.00	-13.87	peak	
6		2489.200	55.84	-6.83	49.01	54.00	-4.99	AVG	


測試頻道:	IEEE 802.11n (HT40) / 2452 MHz	測試模式:	發射
解析頻寬:	1000 kHz / 1000 kHz	視頻頻寬:	3000 kHz / 10 Hz
量測天線:	Horn Antenna	測試距離:	3 米
檢 測 器:	Peak/AV	測試日期:	108/10/29
環境溫度:	23°C	環境濕度:	66%

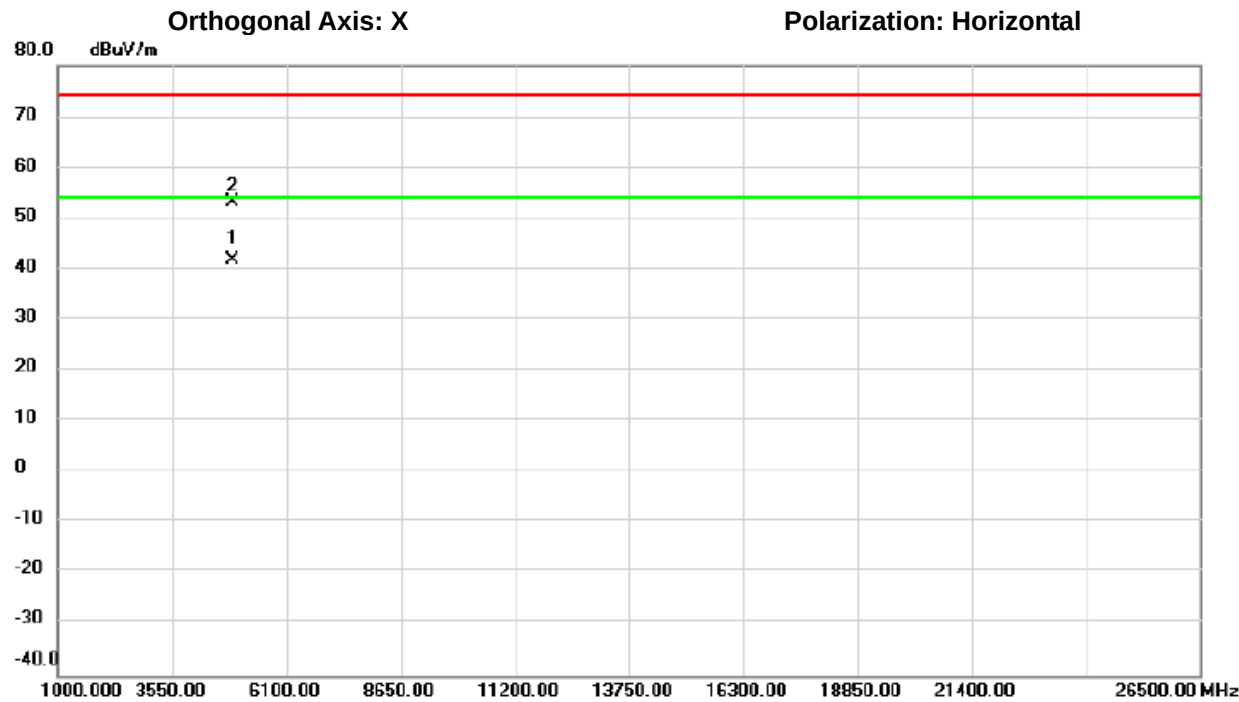

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4899.080	53.71	-11.96	41.75	54.00	-12.25	AVG	
2		4900.690	65.17	-11.96	53.21	74.00	-20.79	peak	

測試頻道: IEEE 802.11ax (HEW20) /
2412 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

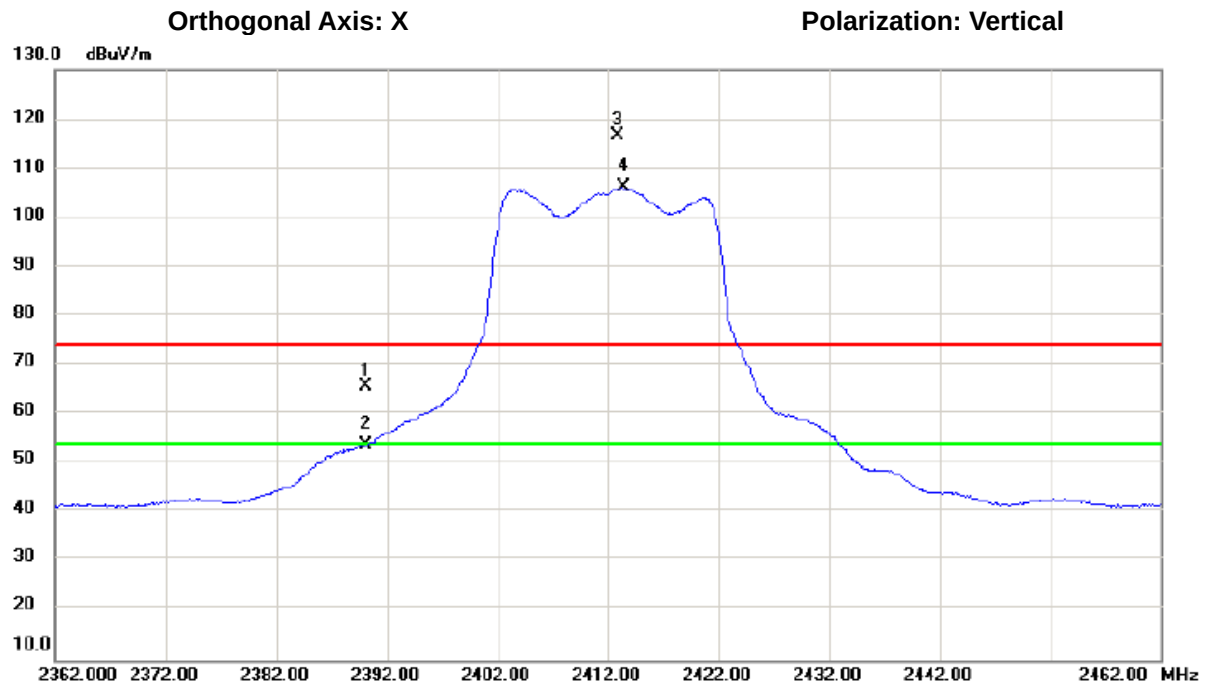

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	72.95	-7.23	65.72	74.00	-8.28	peak	
2		2390.000	60.90	-7.23	53.67	54.00	-0.33	AVG	
3	X	2412.900	123.70	-7.13	116.57	74.00	42.57	peak	主波訊號不予判定
4	*	2413.350	113.23	-7.13	106.10	54.00	52.10	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW20) /
 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 3000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/10/29
 環境濕度: 66%

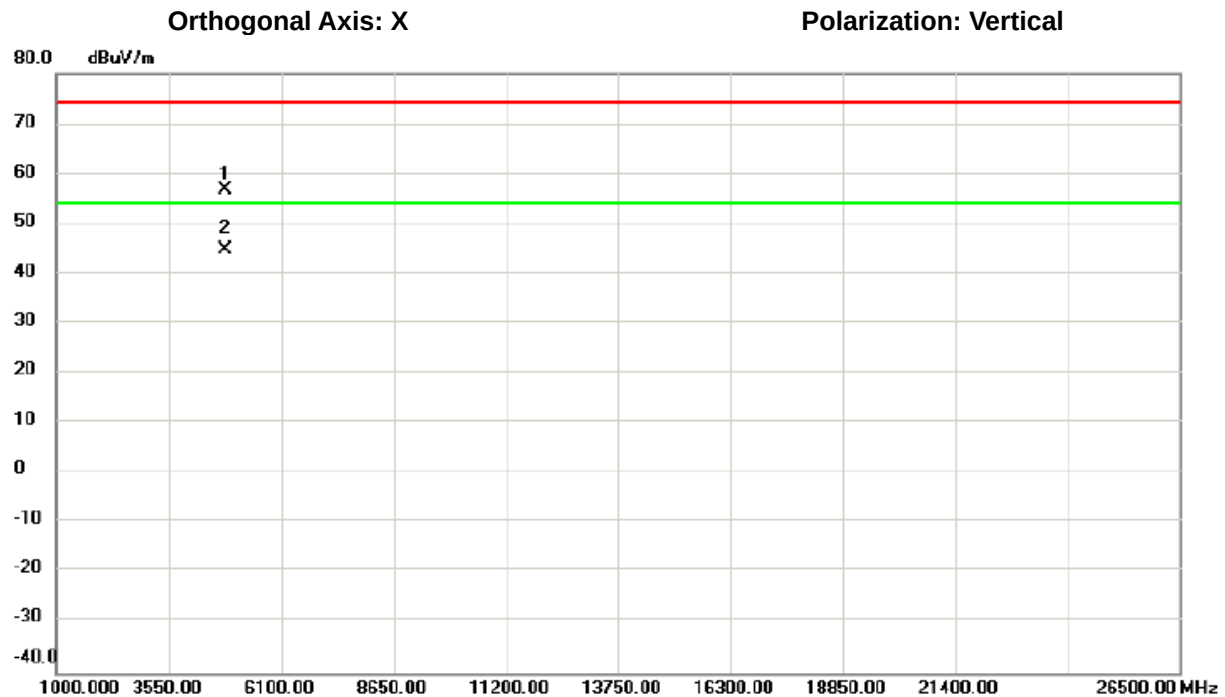

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4827.015	68.82	-12.05	56.77	74.00	-17.23	peak	
2	*	4827.620	56.75	-12.05	44.70	54.00	-9.30	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
2412 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

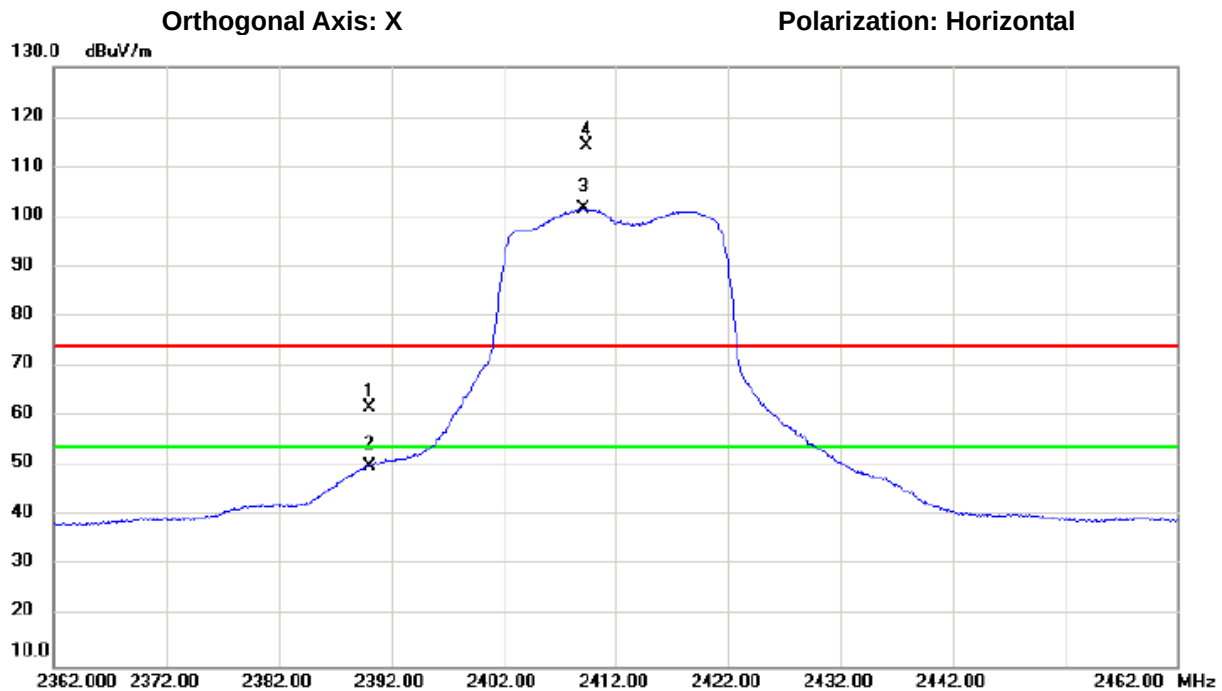

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	68.90	-7.23	61.67	74.00	-12.33	peak	
2		2390.000	57.41	-7.23	50.18	54.00	-3.82	AVG	
3	*	2409.200	108.76	-7.15	101.61	54.00	47.61	AVG	主波訊號不予判定
4	X	2409.400	121.43	-7.15	114.28	74.00	40.28	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW20) /
2412 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

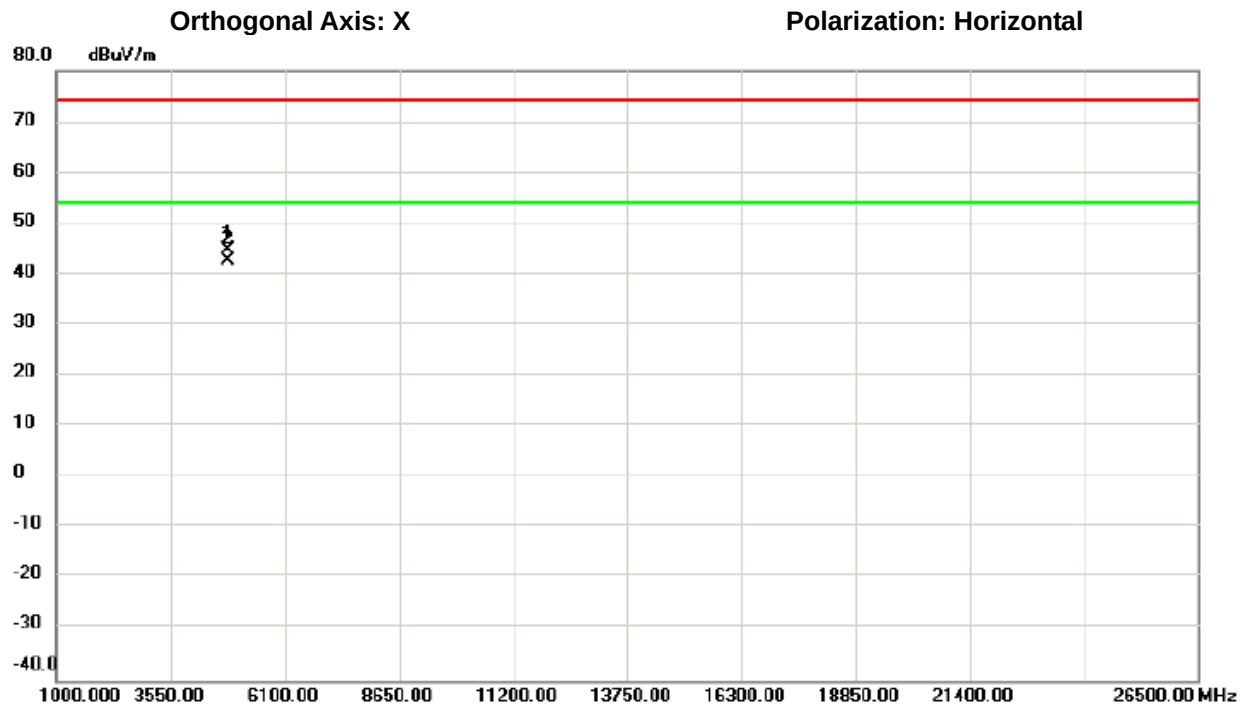

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4827.015	56.82	-12.05	44.77	74.00	-29.23	peak	
2	*	4827.620	54.75	-12.05	42.70	54.00	-11.30	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
2417 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

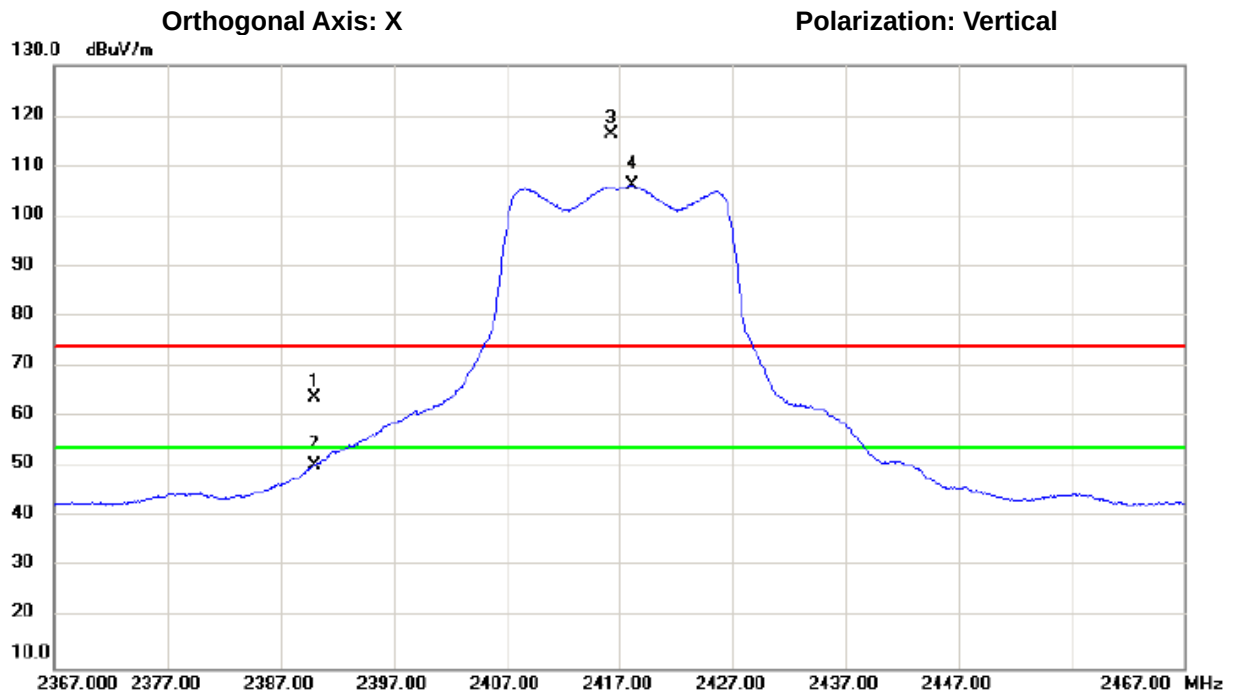

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	71.00	-7.23	63.77	74.00	-10.23	peak	
2		2390.000	57.73	-7.23	50.50	54.00	-3.50	AVG	
3	X	2416.250	123.49	-7.12	116.37	74.00	42.37	peak	主波訊號不予判定
4	*	2418.150	113.38	-7.11	106.27	54.00	52.27	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW20) /
2417 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

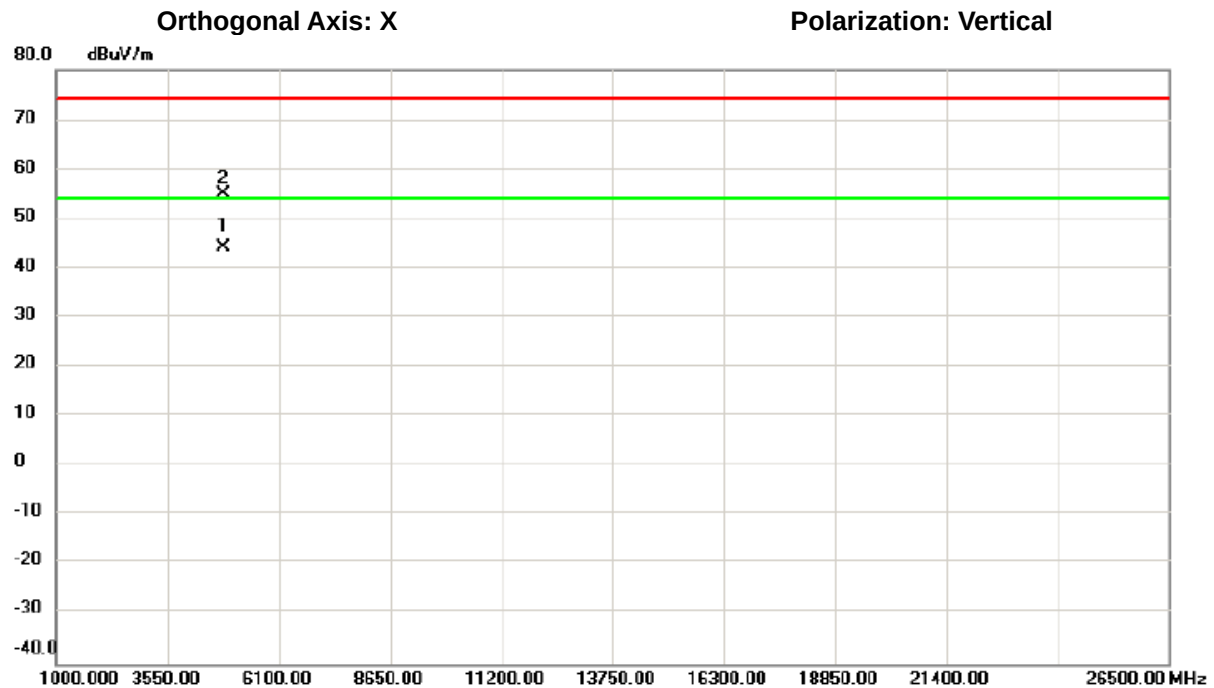


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4837.275	56.08	-12.03	44.05	54.00	-9.95	AVG	
2		4838.160	66.85	-12.03	54.82	74.00	-19.18	peak	

測試頻道: IEEE 802.11ax (HEW20) /
2417 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

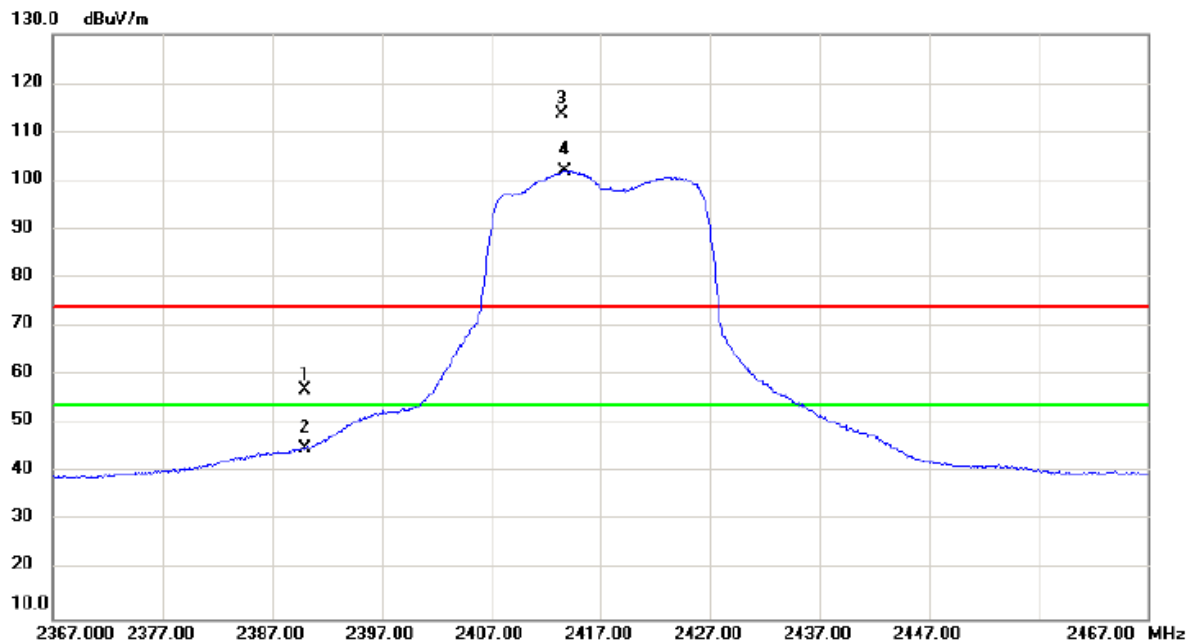

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	64.14	-7.23	56.91	74.00	-17.09	peak	
2		2390.000	52.24	-7.23	45.01	54.00	-8.99	AVG	
3	X	2413.500	120.65	-7.13	113.52	74.00	39.52	peak	主波訊號不予判定
4	*	2413.700	109.17	-7.13	102.04	54.00	48.04	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW20) /
2417 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

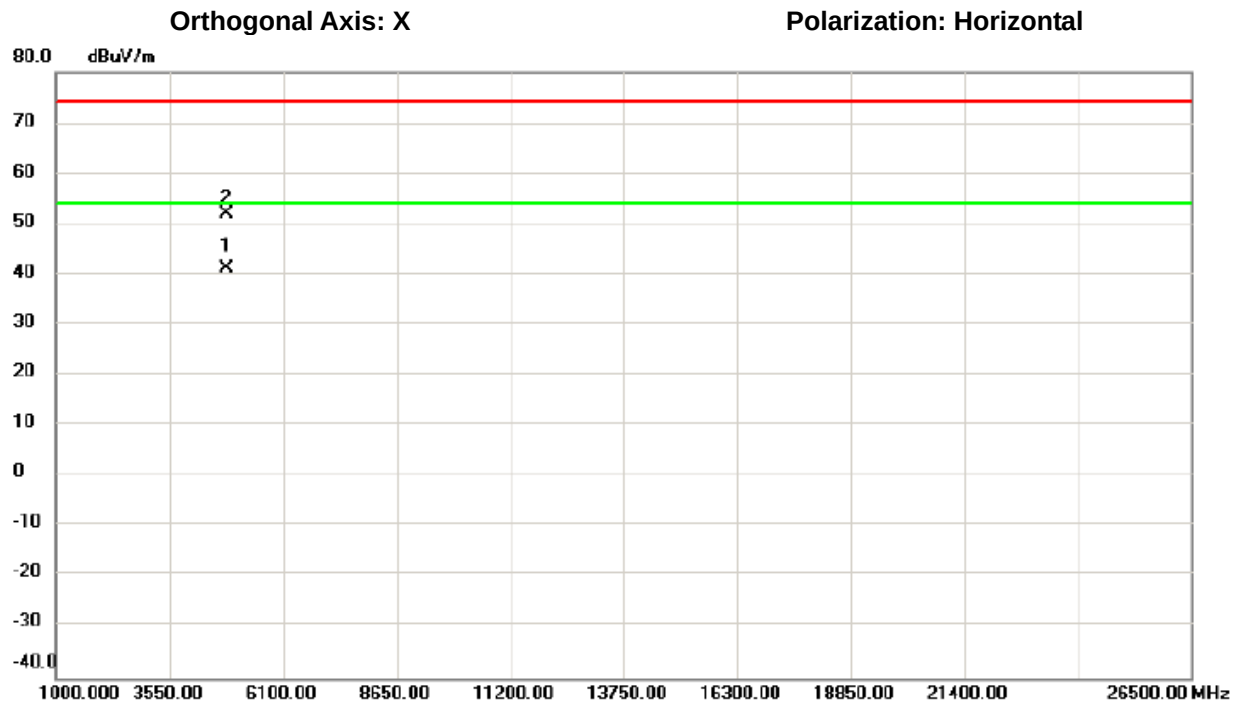

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4837.275	53.08	-12.03	41.05	54.00	-12.95	AVG	
2		4838.160	63.85	-12.03	51.82	74.00	-22.18	peak	

測試頻道: IEEE 802.11ax (HEW20) /
2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

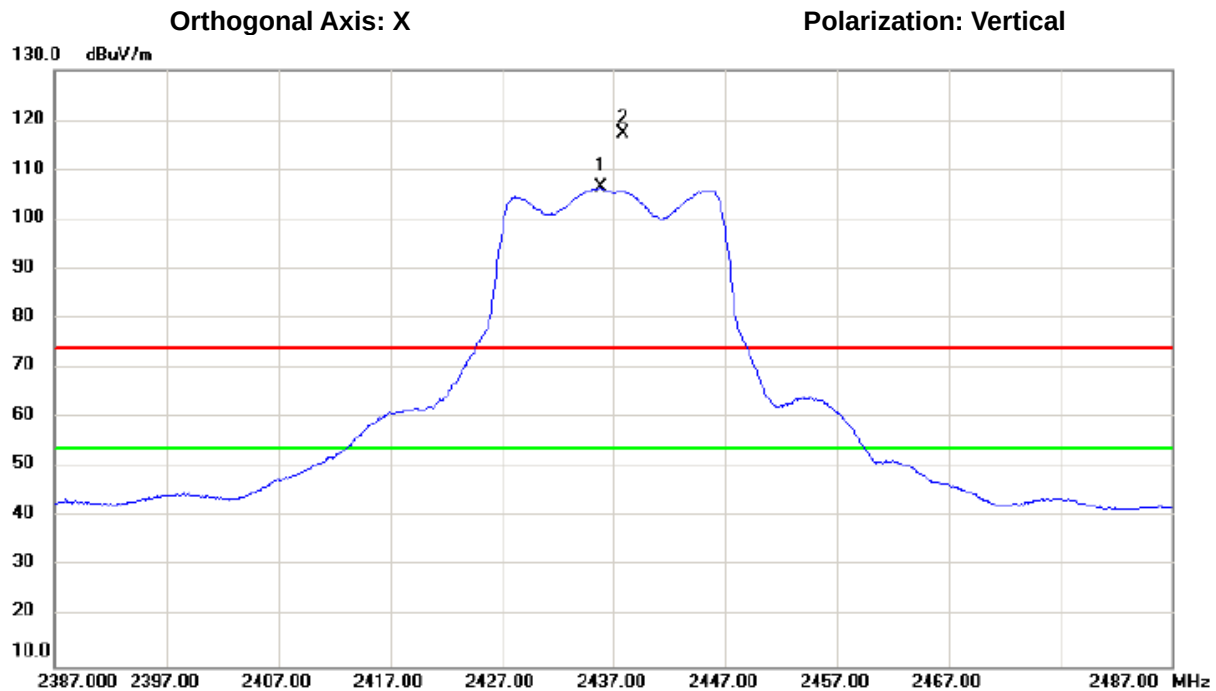

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2435.850	113.37	-7.04	106.33	54.00	52.33	AVG	主波訊號不予判定
2	X	2437.900	124.21	-7.03	117.18	74.00	43.18	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW20) /
2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

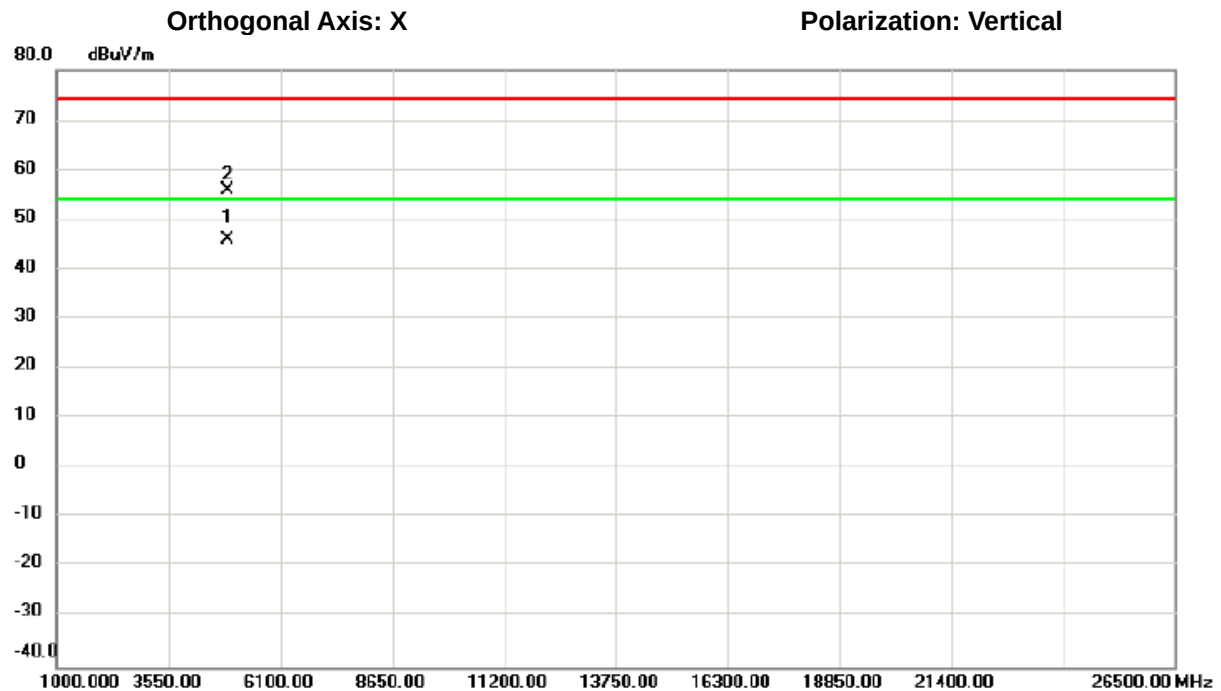

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4877.210	57.81	-11.99	45.82	54.00	-8.18	AVG	
2		4879.000	67.78	-11.98	55.80	74.00	-18.20	peak	

測試頻道: IEEE 802.11ax (HEW20) /
2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

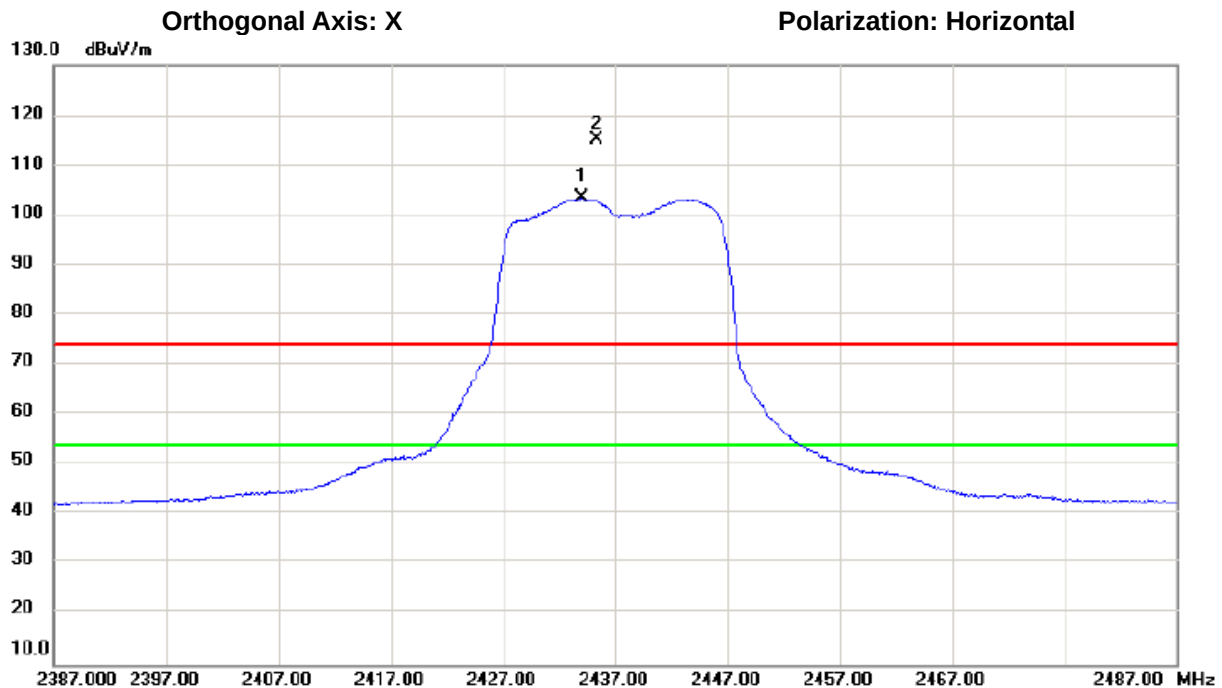

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2433.950	110.41	-7.05	103.36	54.00	49.36	AVG	主波訊號不予判定
2	X	2435.300	122.32	-7.04	115.28	74.00	41.28	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW20) /
2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

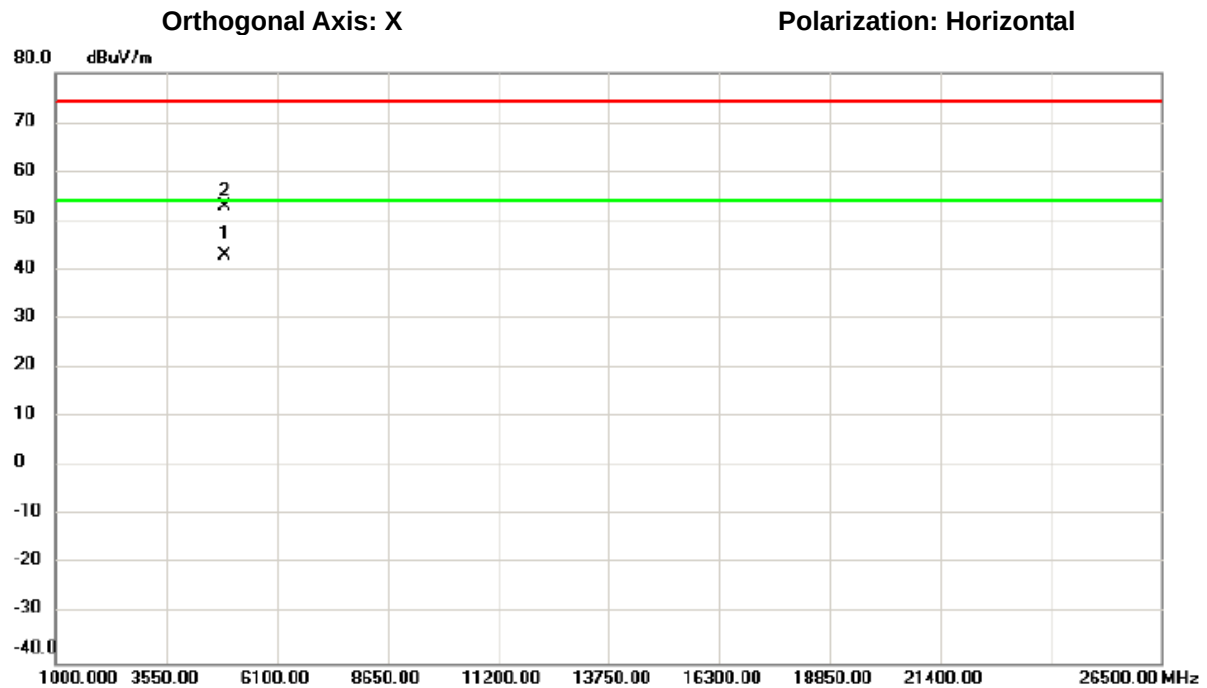

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4877.210	54.81	-11.99	42.82	54.00	-11.18	AVG	
2		4879.000	64.78	-11.98	52.80	74.00	-21.20	peak	

測試頻道: IEEE 802.11ax (HEW20) /
2457 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

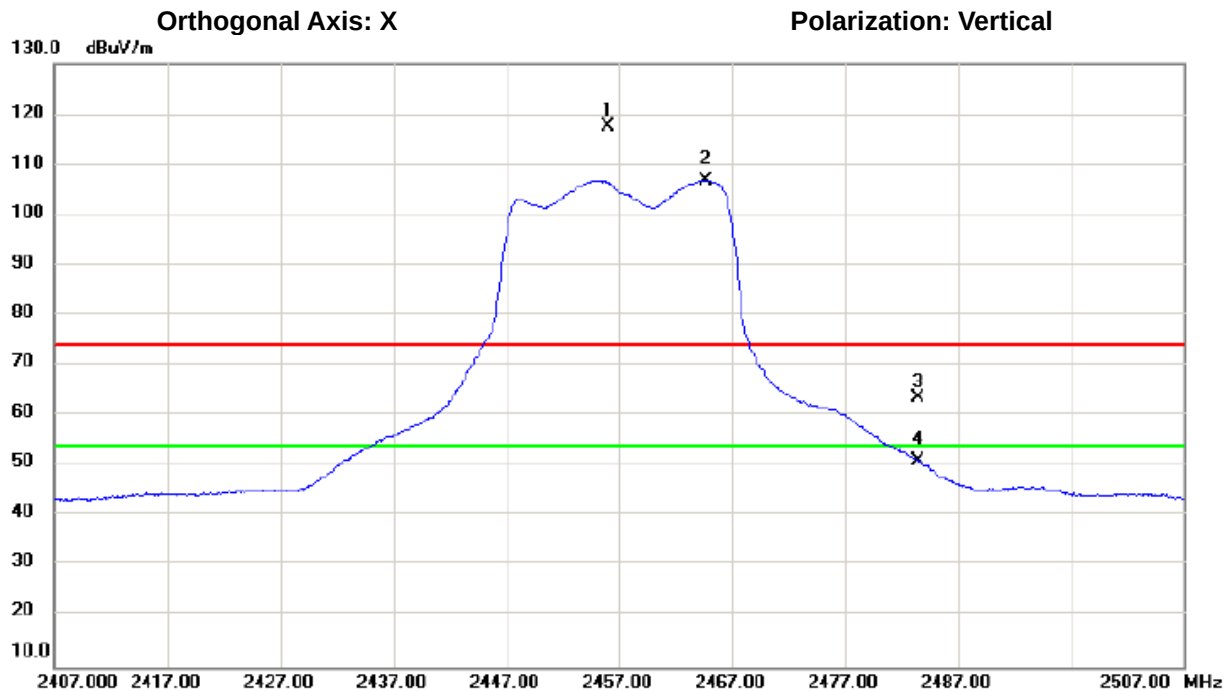

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2456.050	124.54	-6.95	117.59	74.00	43.59	peak	主波訊號不予判定
2	*	2464.650	113.77	-6.93	106.84	54.00	52.84	AVG	主波訊號不予判定
3		2483.500	70.36	-6.85	63.51	74.00	-10.49	peak	
4		2483.500	57.94	-6.85	51.09	54.00	-2.91	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
2457 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

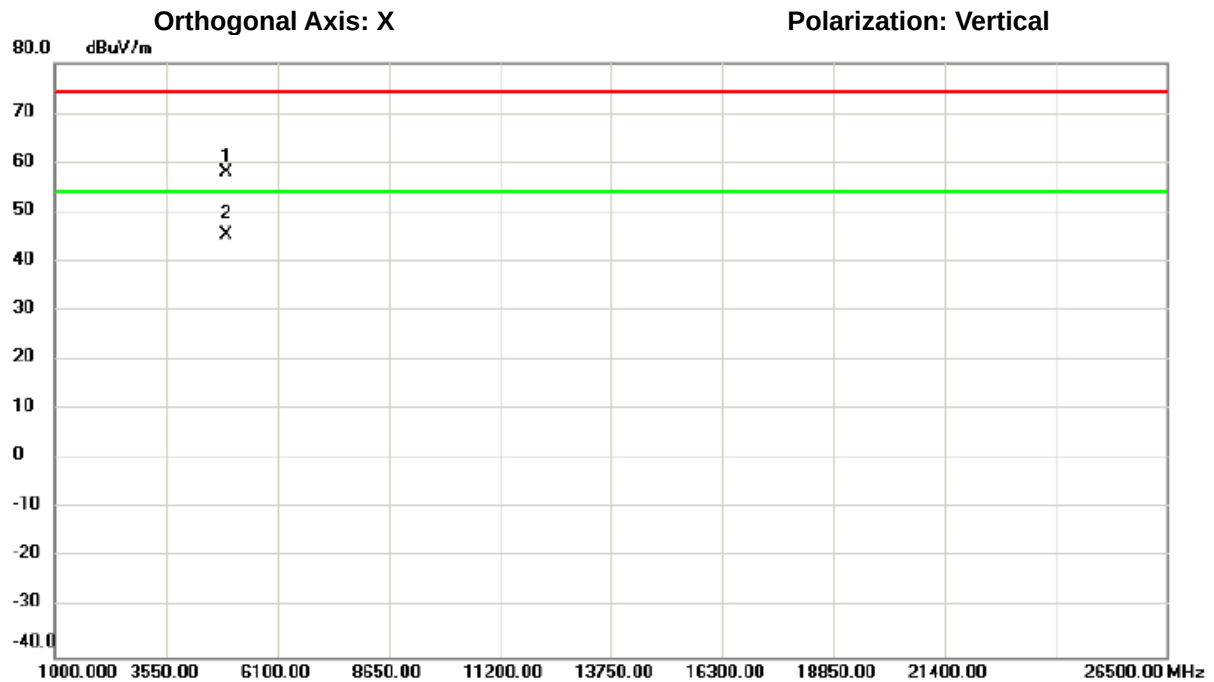

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4917.510	69.75	-11.93	57.82	74.00	-16.18	peak	
2	*	4917.735	57.16	-11.93	45.23	54.00	-8.77	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
2457 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

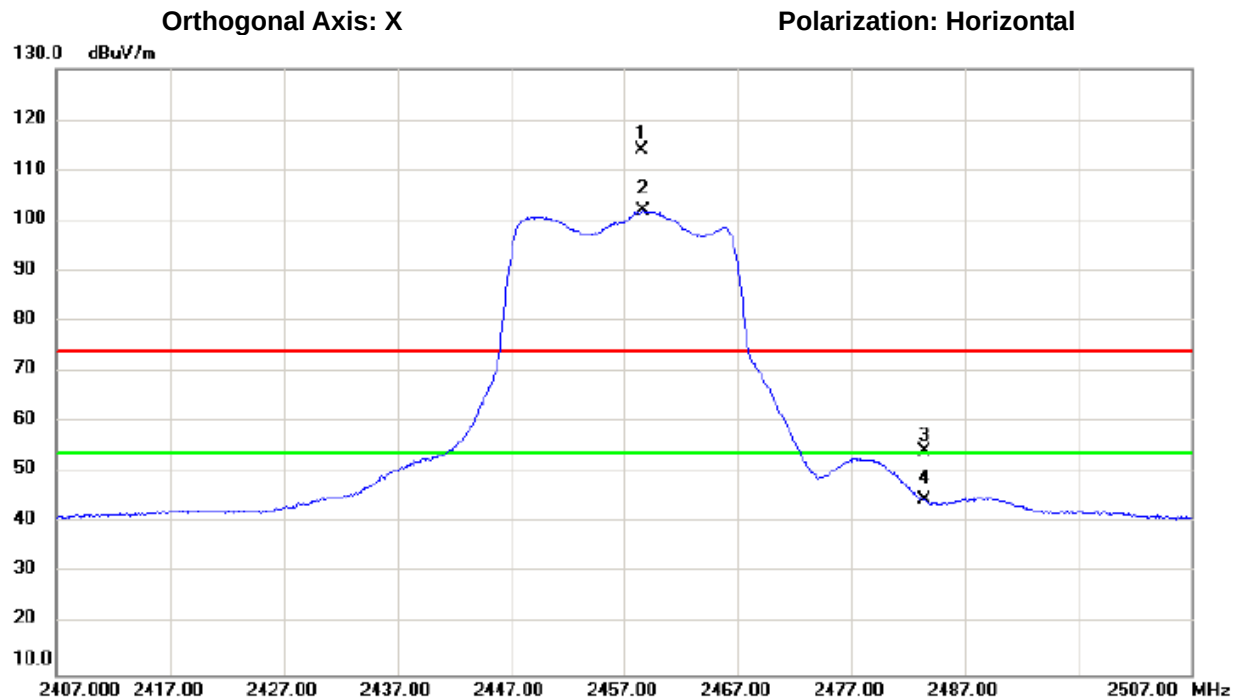

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2458.550	120.94	-6.95	113.99	74.00	39.99	peak	主波訊號不予判定
2	*	2458.700	108.76	-6.95	101.81	54.00	47.81	AVG	主波訊號不予判定
3		2483.500	61.07	-6.85	54.22	74.00	-19.78	peak	
4		2483.500	51.39	-6.85	44.54	54.00	-9.46	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
2457 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

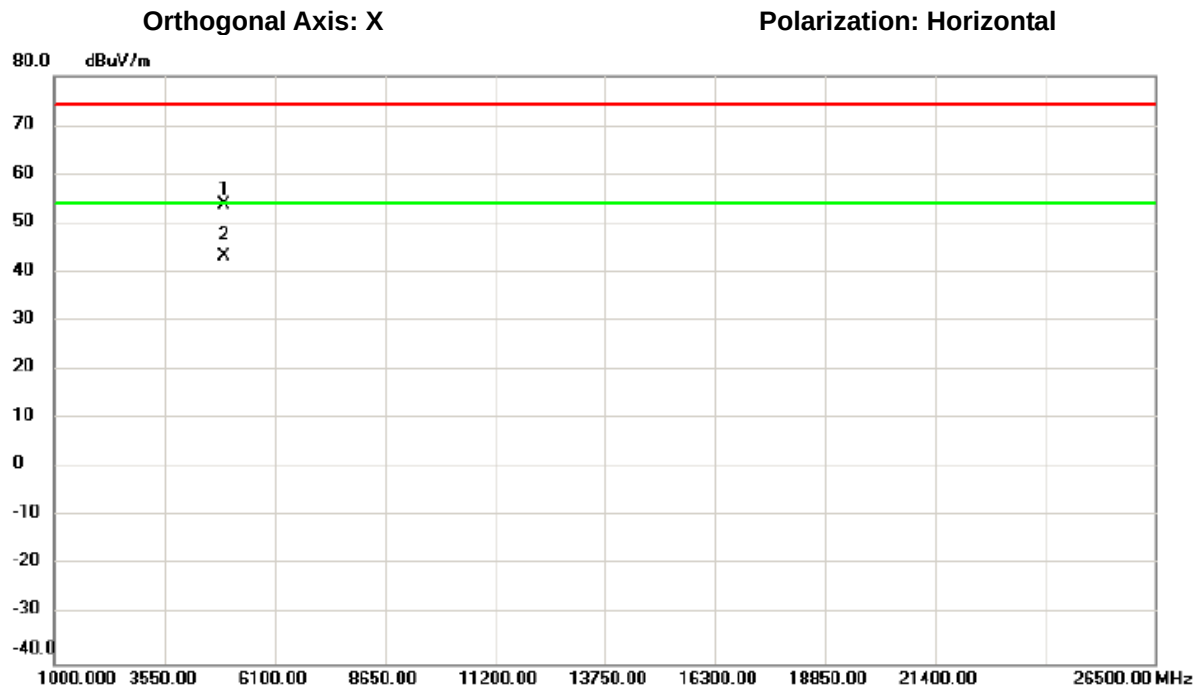


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4917.510	65.75	-11.93	53.82	74.00	-20.18	peak	
2	*	4917.735	55.16	-11.93	43.23	54.00	-10.77	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
2462 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

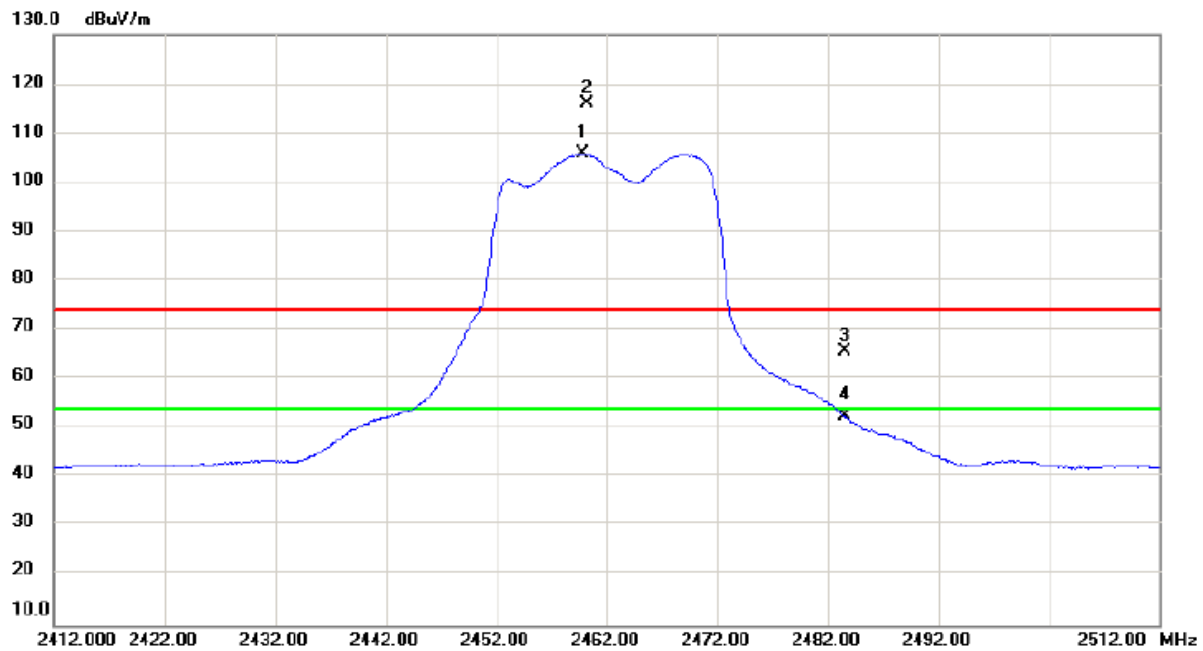

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2459.800	112.76	-6.94	105.82	54.00	51.82	AVG	主波訊號不予判定
2	X	2460.150	123.05	-6.94	116.11	74.00	42.11	peak	主波訊號不予判定
3		2483.500	72.53	-6.85	65.68	74.00	-8.32	peak	
4		2483.500	59.23	-6.85	52.38	54.00	-1.62	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 3000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/10/29
 環境濕度: 66%

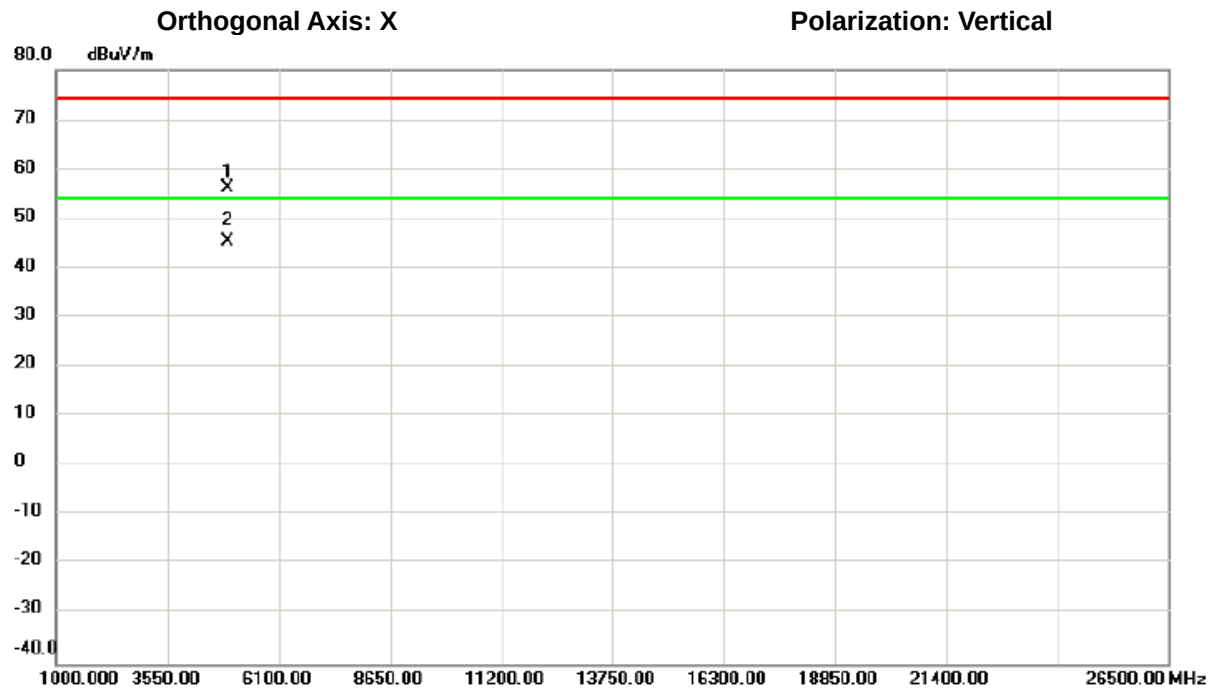

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4918.150	68.00	-11.93	56.07	74.00	-17.93	peak	
2	*	4918.470	57.38	-11.93	45.45	54.00	-8.55	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
2462 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

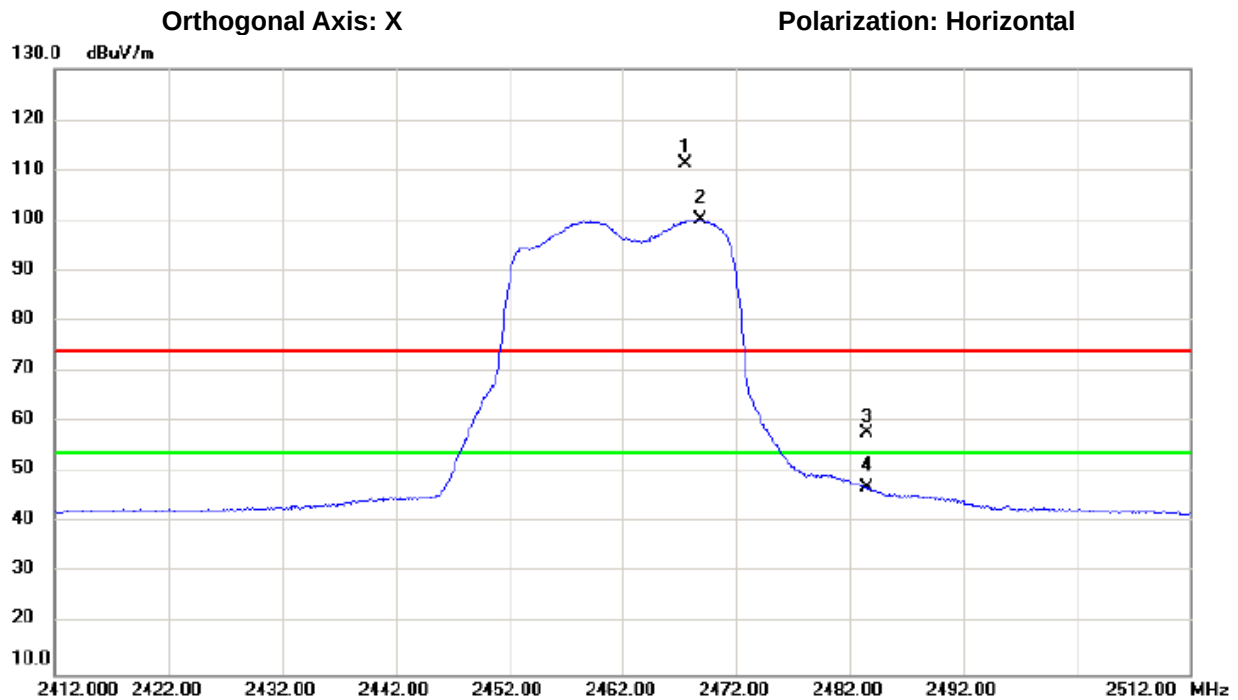

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2467.600	118.10	-6.91	111.19	74.00	37.19	peak	主波訊號不予判定
2	*	2468.800	107.06	-6.91	100.15	54.00	46.15	AVG	主波訊號不予判定
3		2483.500	64.83	-6.85	57.98	74.00	-16.02	peak	
4		2483.500	53.78	-6.85	46.93	54.00	-7.07	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
2462 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

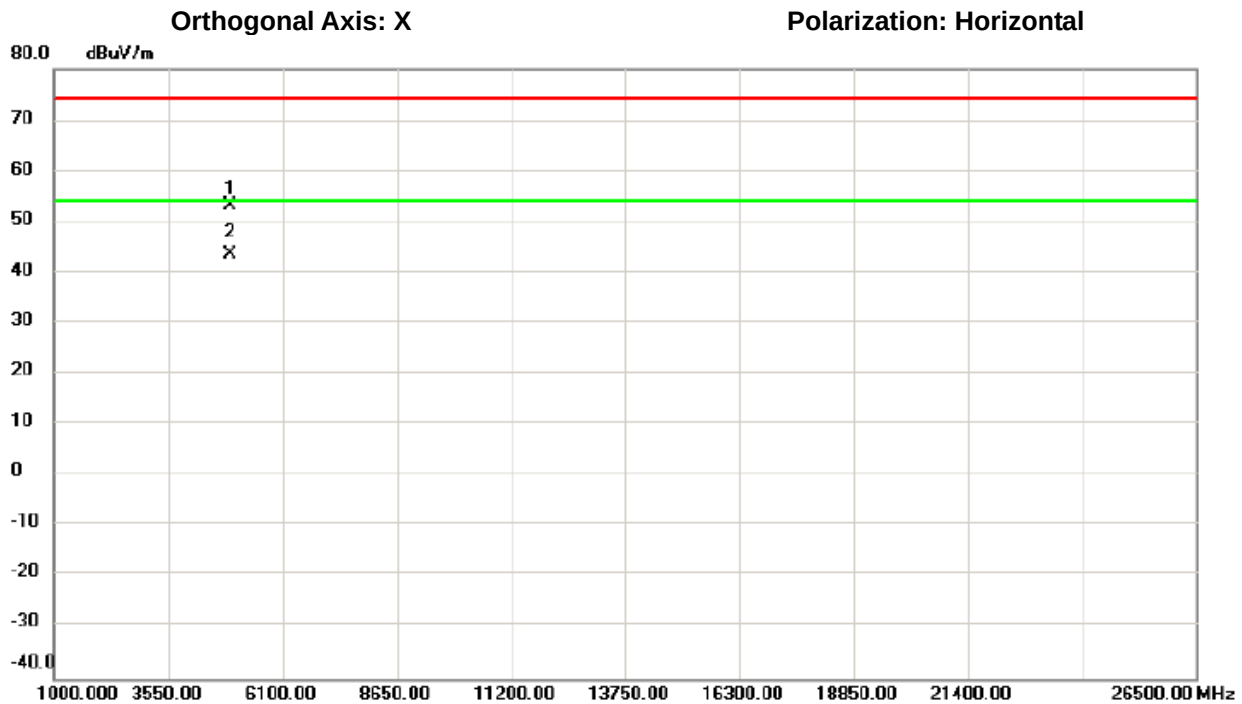

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4918.150	65.00	-11.93	53.07	74.00	-20.93	peak	
2	*	4918.470	55.38	-11.93	43.45	54.00	-10.55	AVG	


測試頻道: IEEE 802.11ax (HEW40) /
2422 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

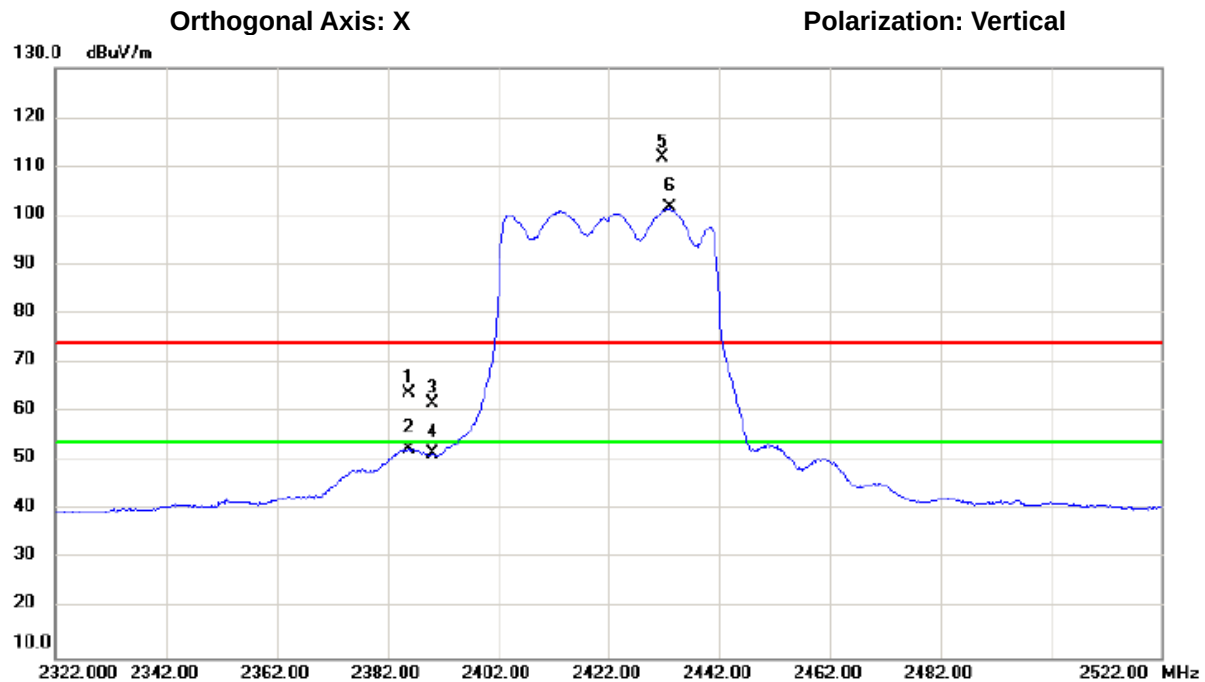

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2385.800	71.14	-7.24	63.90	74.00	-10.10	peak	
2		2385.800	59.60	-7.24	52.36	54.00	-1.64	AVG	
3		2390.000	69.11	-7.23	61.88	74.00	-12.12	peak	
4		2390.000	58.71	-7.23	51.48	54.00	-2.52	AVG	
5	X	2431.800	118.93	-7.06	111.87	74.00	37.87	peak	主波訊號不予判定
6	*	2433.100	108.59	-7.06	101.53	54.00	47.53	AVG	主波訊號不予判定


測試頻道:	IEEE 802.11ax (HEW40) / 2422 MHz	測試模式:	發射
解析頻寬:	1000 kHz / 1000 kHz	視頻頻寬:	3000 kHz / 10 Hz
量測天線:	Horn Antenna	測試距離:	3 米
檢 測 器:	Peak/AV	測試日期:	108/10/29
環境溫度:	23°C	環境濕度:	66%

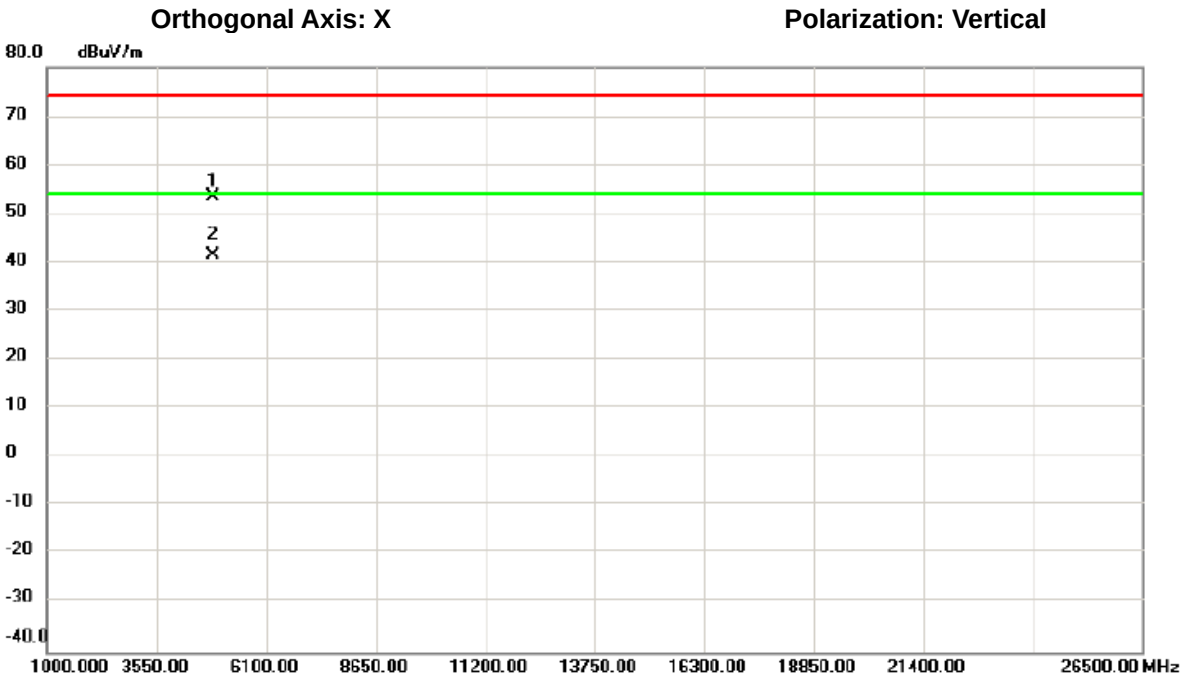

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4847.275	65.51	-12.02	53.49	74.00	-20.51	peak
2	*	4847.425	53.60	-12.02	41.58	54.00	-12.42	AVG

測試頻道: IEEE 802.11ax (HEW40) /
2422 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

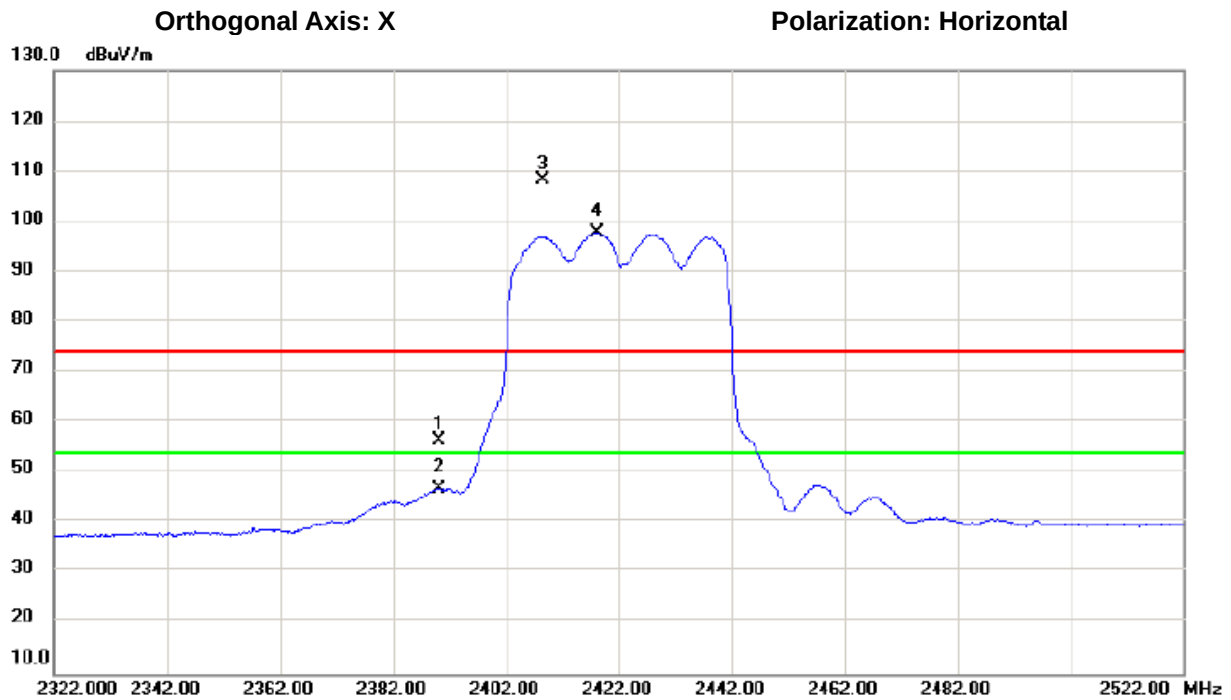

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	63.57	-7.23	56.34	74.00	-17.66	peak	
2		2390.000	54.00	-7.23	46.77	54.00	-7.23	AVG	
3	X	2408.400	115.51	-7.16	108.35	74.00	34.35	peak	主波訊號不予判定
4	*	2418.200	104.99	-7.11	97.88	54.00	43.88	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW40) /
 2422 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 3000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/10/29
 環境濕度: 66%

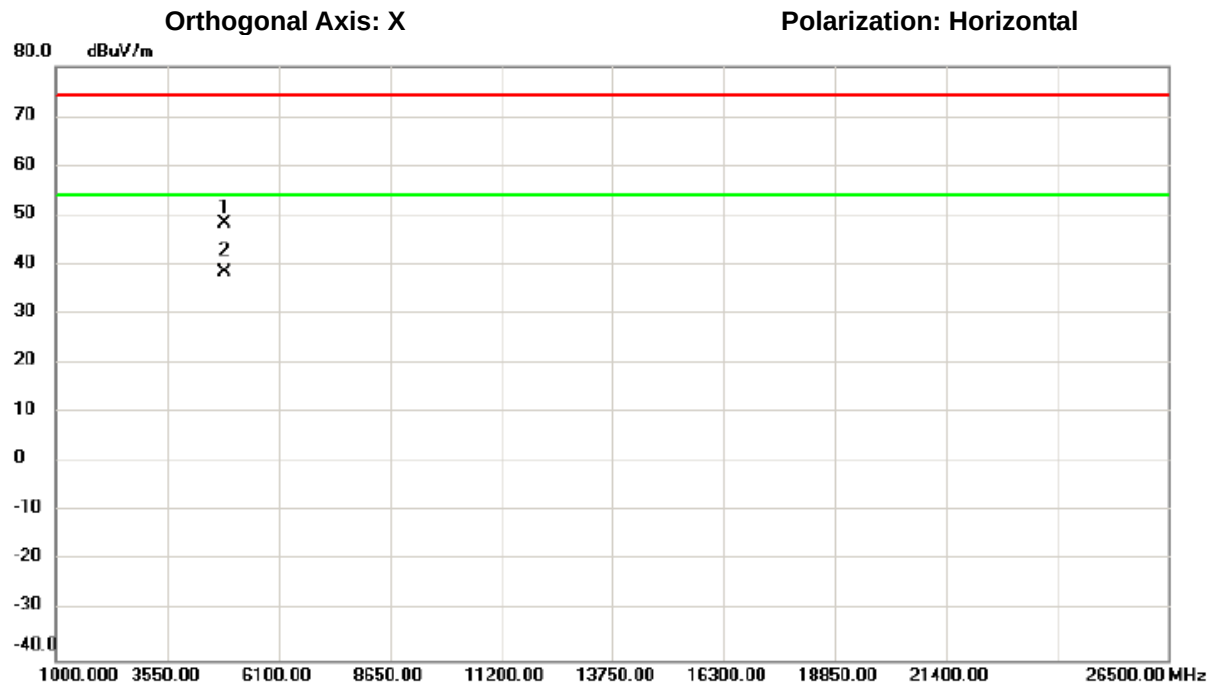


測試頻道: IEEE 802.11ax (HEW40) /
2427 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

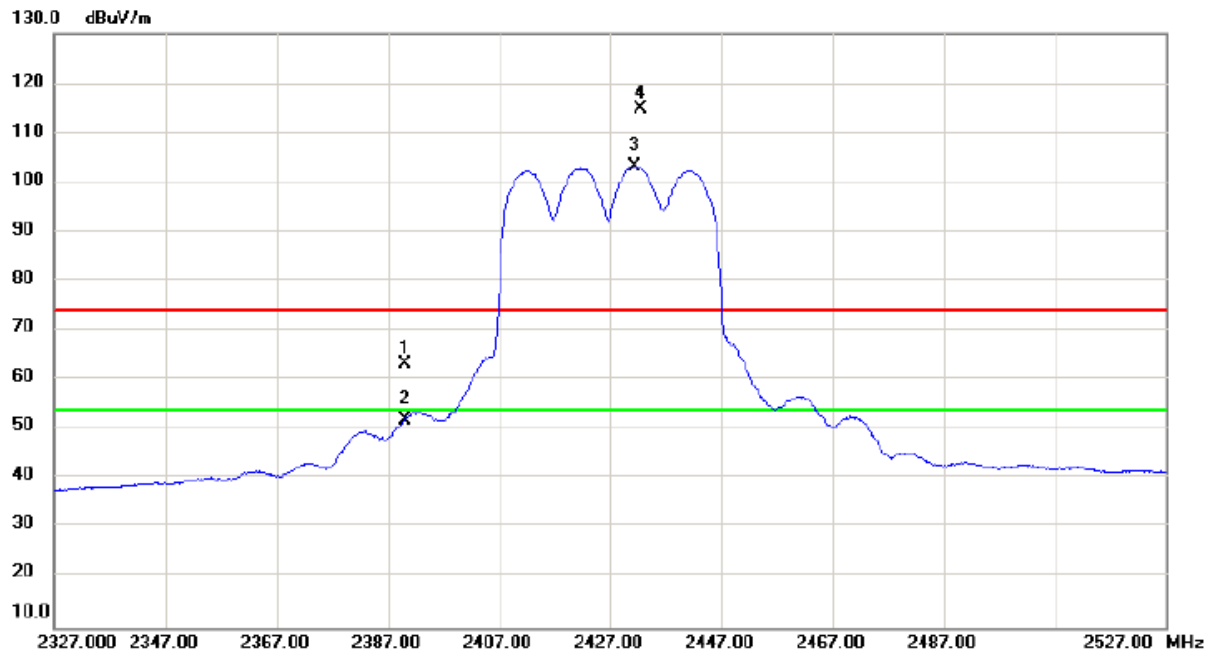

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	70.51	-7.23	63.28	74.00	-10.72	peak	
2		2390.000	59.11	-7.23	51.88	54.00	-2.12	AVG	
3	*	2431.500	110.15	-7.06	103.09	54.00	49.09	AVG	主波訊號不予判定
4	X	2432.400	121.82	-7.06	114.76	74.00	40.76	peak	主波訊號不予判定


測試頻道: IEEE 802.11ax (HEW40) /
2427 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

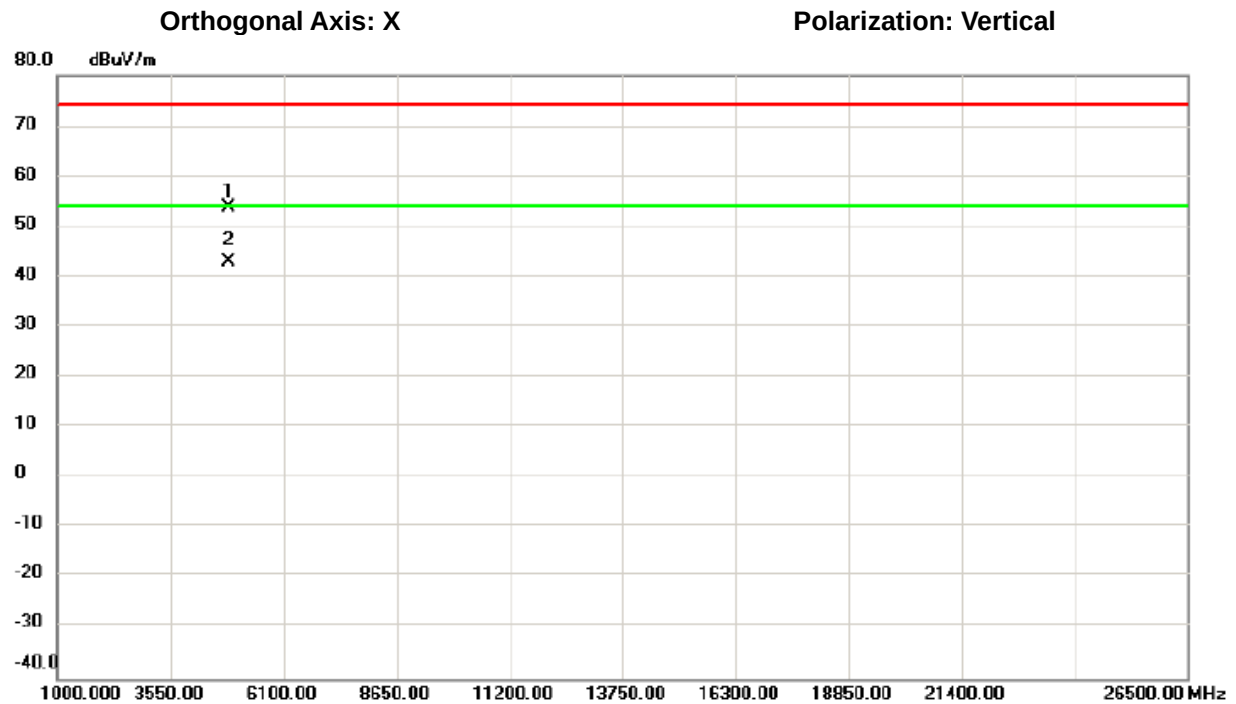

測試頻道: IEEE 802.11ax (HEW40) /
2427 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

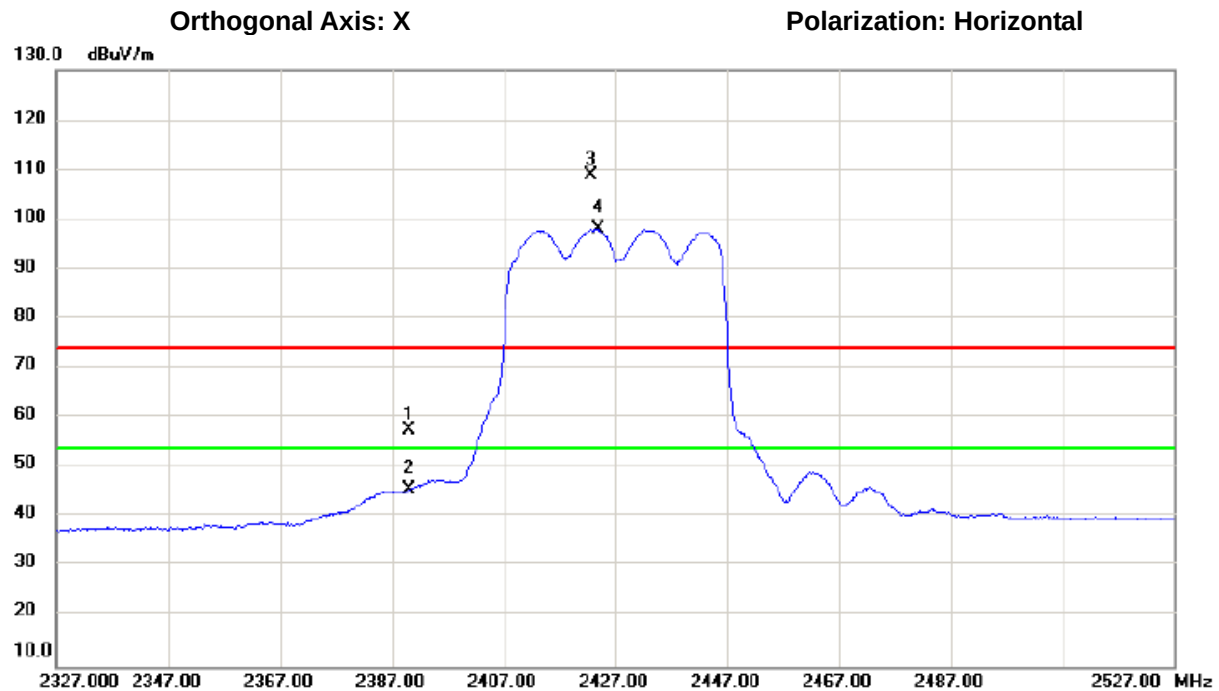

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	64.78	-7.23	57.55	74.00	-16.45	peak	
2		2390.000	52.64	-7.23	45.41	54.00	-8.59	AVG	
3	X	2422.700	115.92	-7.10	108.82	74.00	34.82	peak	主波訊號不予判定
4	*	2423.800	105.06	-7.09	97.97	54.00	43.97	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW40) /
2427 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

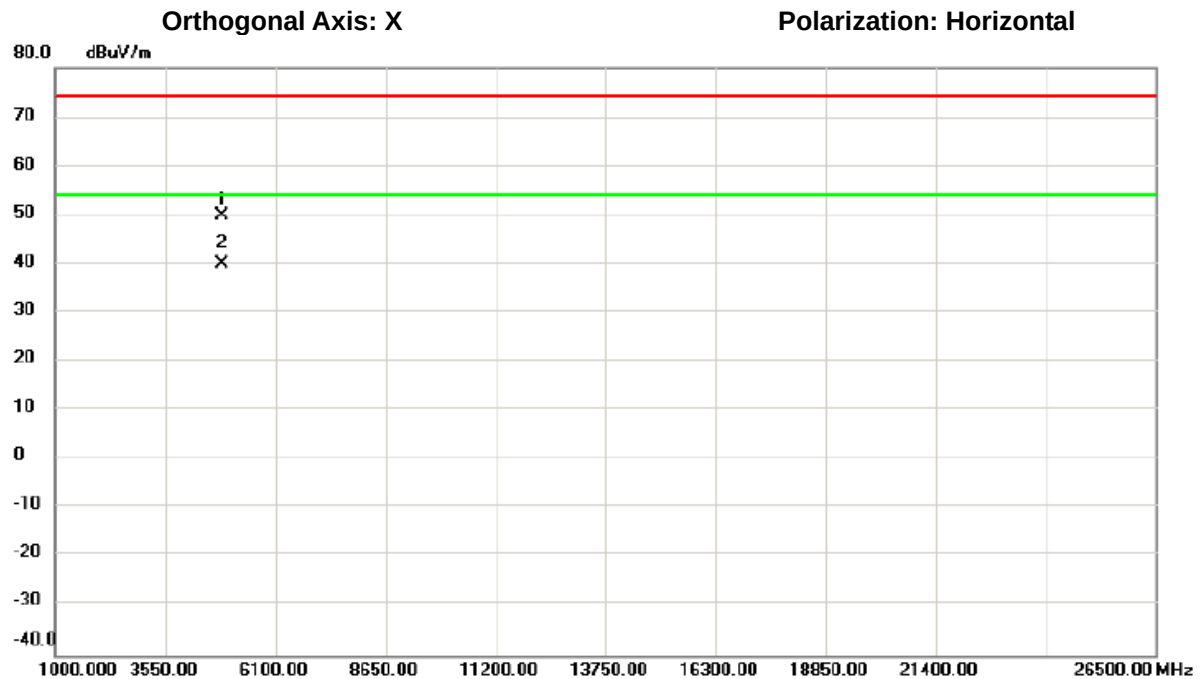

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4857.705	61.82	-12.01	49.81	74.00	-24.19	peak	
2	*	4857.880	51.92	-12.01	39.91	54.00	-14.09	AVG	


測試頻道: IEEE 802.11ax (HEW40) /
2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

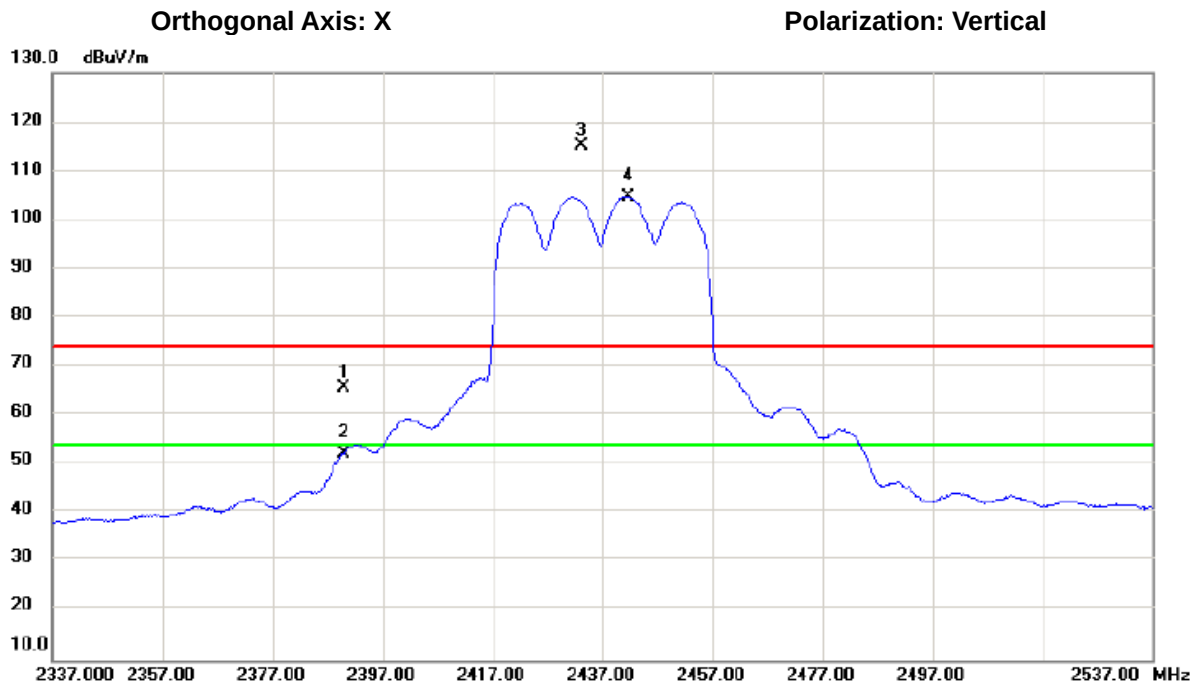

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	72.86	-7.23	65.63	74.00	-8.37	peak	
2		2390.000	59.50	-7.23	52.27	54.00	-1.73	AVG	
3	X	2433.100	122.13	-7.06	115.07	74.00	41.07	peak	主波訊號不予判定
4	*	2441.600	111.79	-7.01	104.78	54.00	50.78	AVG	主波訊號不予判定

測試頻道:	IEEE 802.11ax (HEW40) / 2437 MHz	測試模式:	發射
解析頻寬:	1000 kHz / 1000 kHz	視頻頻寬:	3000 kHz / 10 Hz
量測天線:	Horn Antenna	測試距離:	3 米
檢 測 器:	Peak/AV	測試日期:	108/10/29
環境溫度:	23°C	環境濕度:	66%

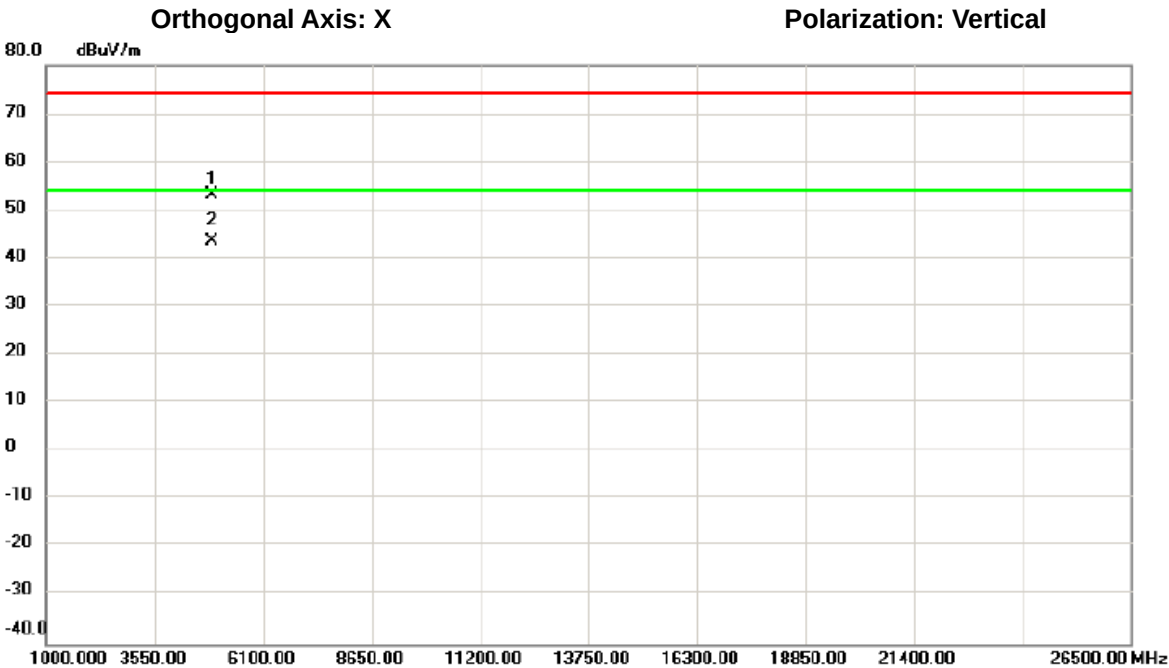


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4877.715	65.17	-11.99	53.18	74.00	-20.82	peak	
2	*	4878.155	55.50	-11.98	43.52	54.00	-10.48	AVG	

測試頻道: IEEE 802.11ax (HEW40) /
2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

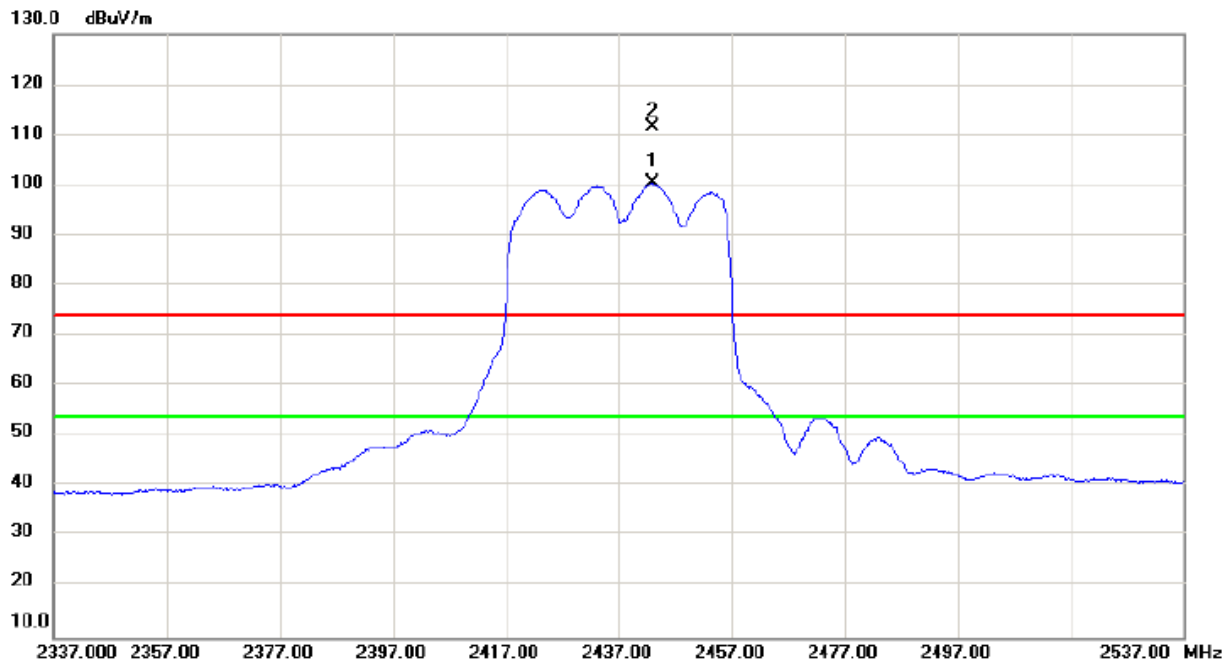

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2442.900	107.33	-7.01	100.32	54.00	46.32	AVG	主波訊號不予判定
2	X	2443.100	118.68	-7.01	111.67	74.00	37.67	peak	主波訊號不予判定


測試頻道: IEEE 802.11ax (HEW40) /
 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 3000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/10/29
 環境濕度: 66%

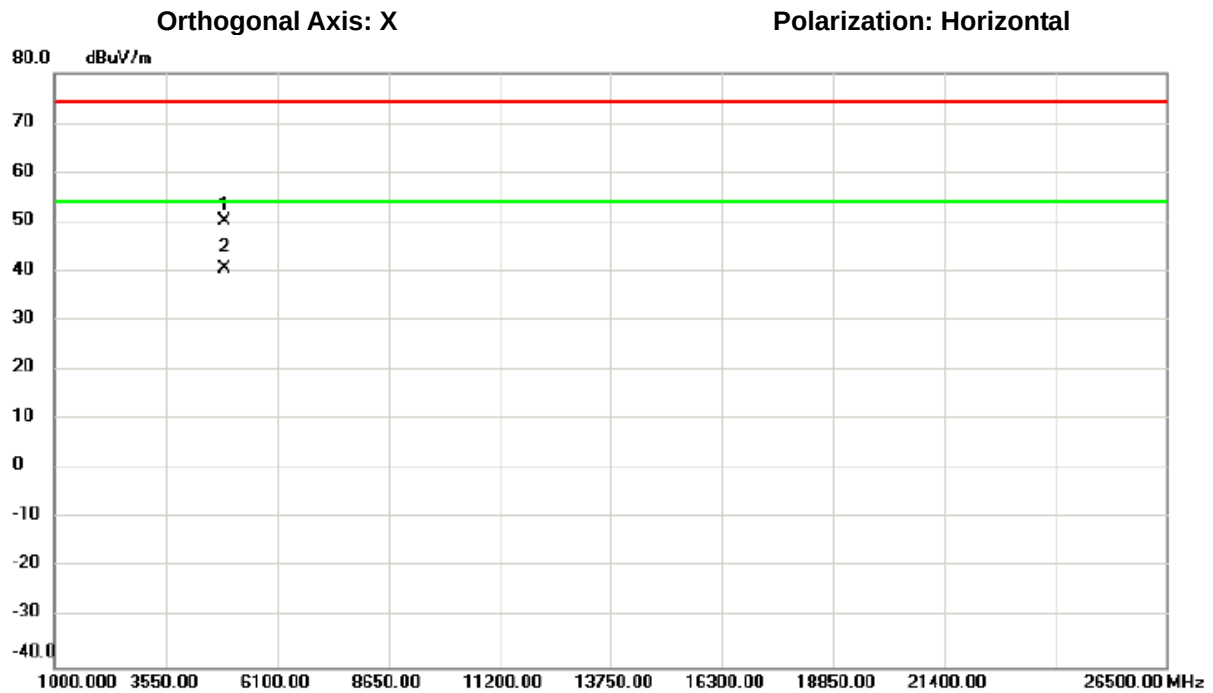

測試頻道: IEEE 802.11ax (HEW40) /
2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

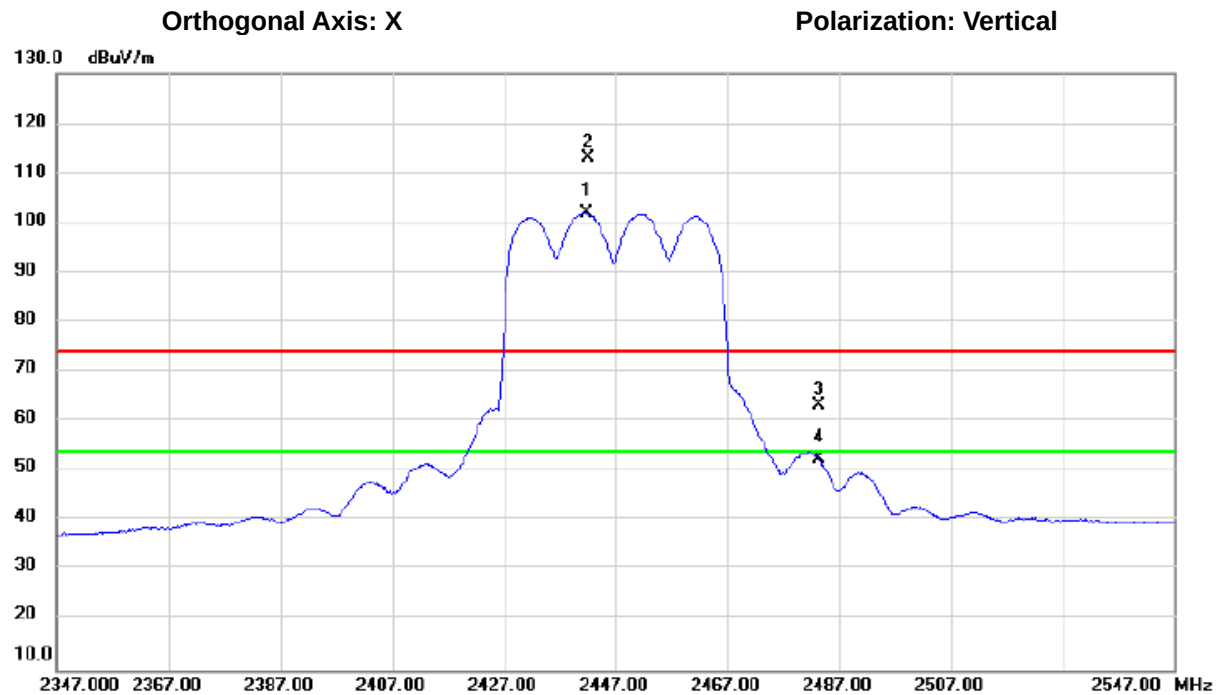

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2441.700	109.10	-7.01	102.09	54.00	48.09	AVG	主波訊號不予判定
2	X	2442.100	120.10	-7.01	113.09	74.00	39.09	peak	主波訊號不予判定
3		2483.500	70.13	-6.85	63.28	74.00	-10.72	peak	
4		2483.500	59.18	-6.85	52.33	54.00	-1.67	AVG	

測試頻道: IEEE 802.11ax (HEW40) /
2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

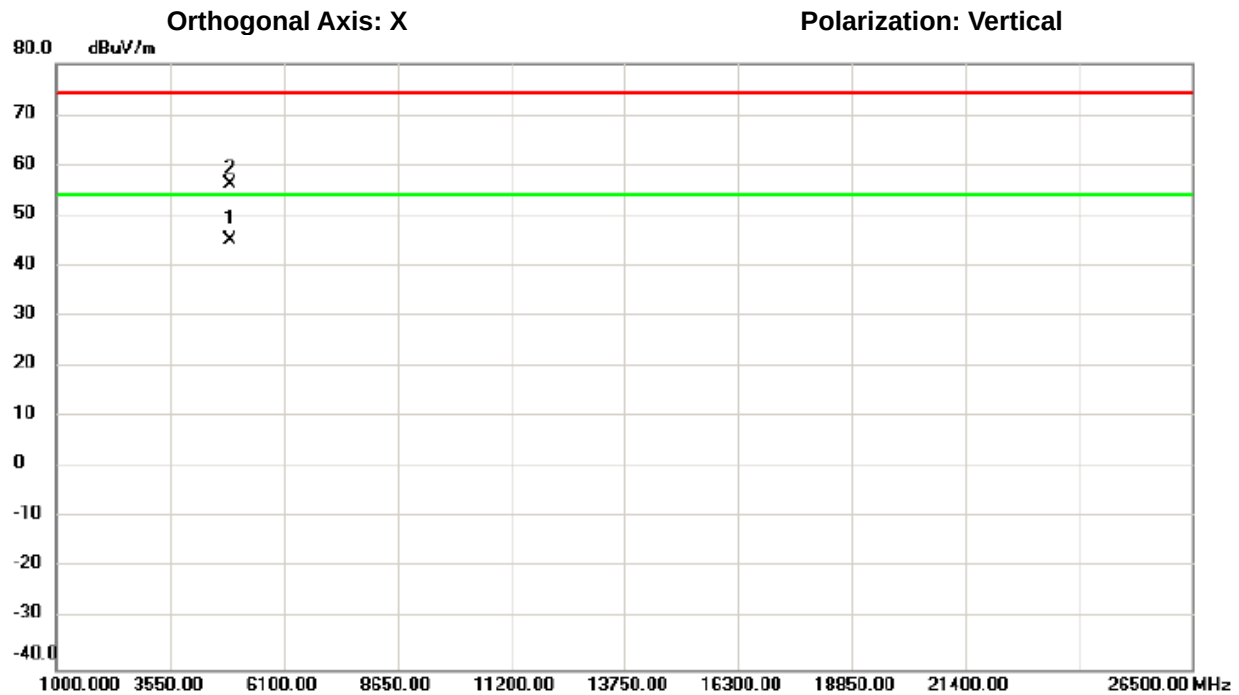

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4898.390	56.94	-11.96	44.98	54.00	-9.02	AVG	
2		4898.835	68.26	-11.96	56.30	74.00	-17.70	peak	

測試頻道: IEEE 802.11ax (HEW40) /
2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

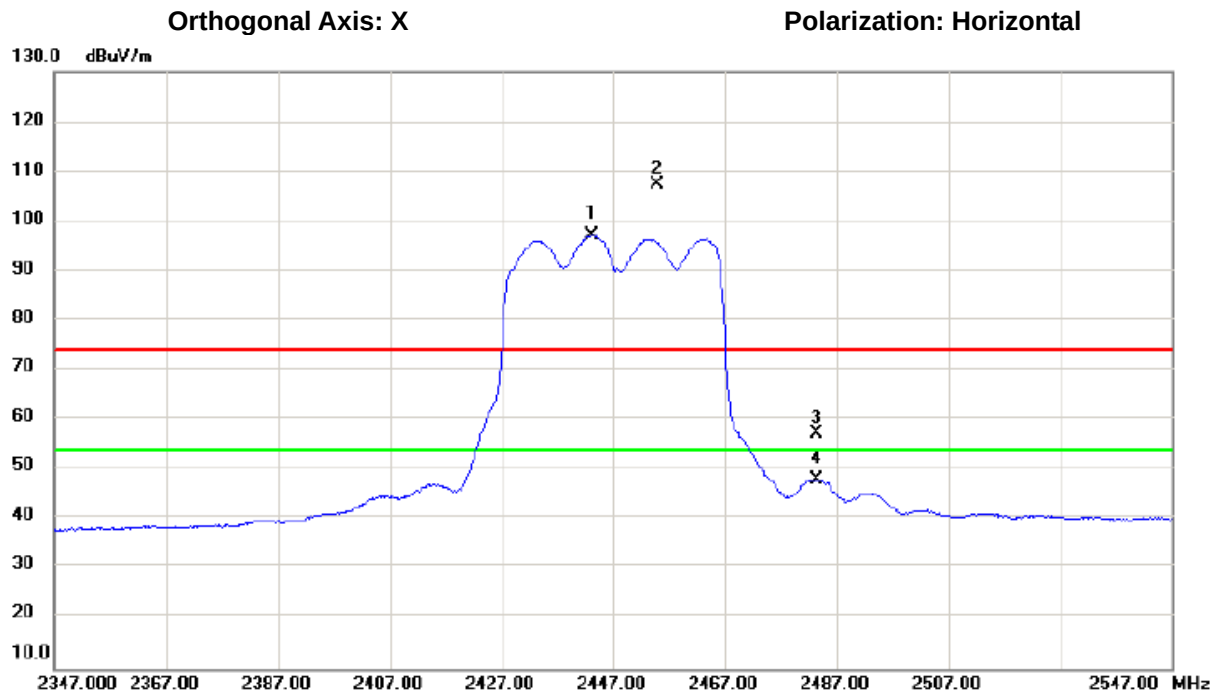

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2443.200	104.09	-7.01	97.08	54.00	43.08	AVG	主波訊號不予判定
2	X	2454.800	114.46	-6.96	107.50	74.00	33.50	peak	主波訊號不予判定
3		2483.500	64.20	-6.85	57.35	74.00	-16.65	peak	
4		2483.500	54.90	-6.85	48.05	54.00	-5.95	AVG	

測試頻道: IEEE 802.11ax (HEW40) /
2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

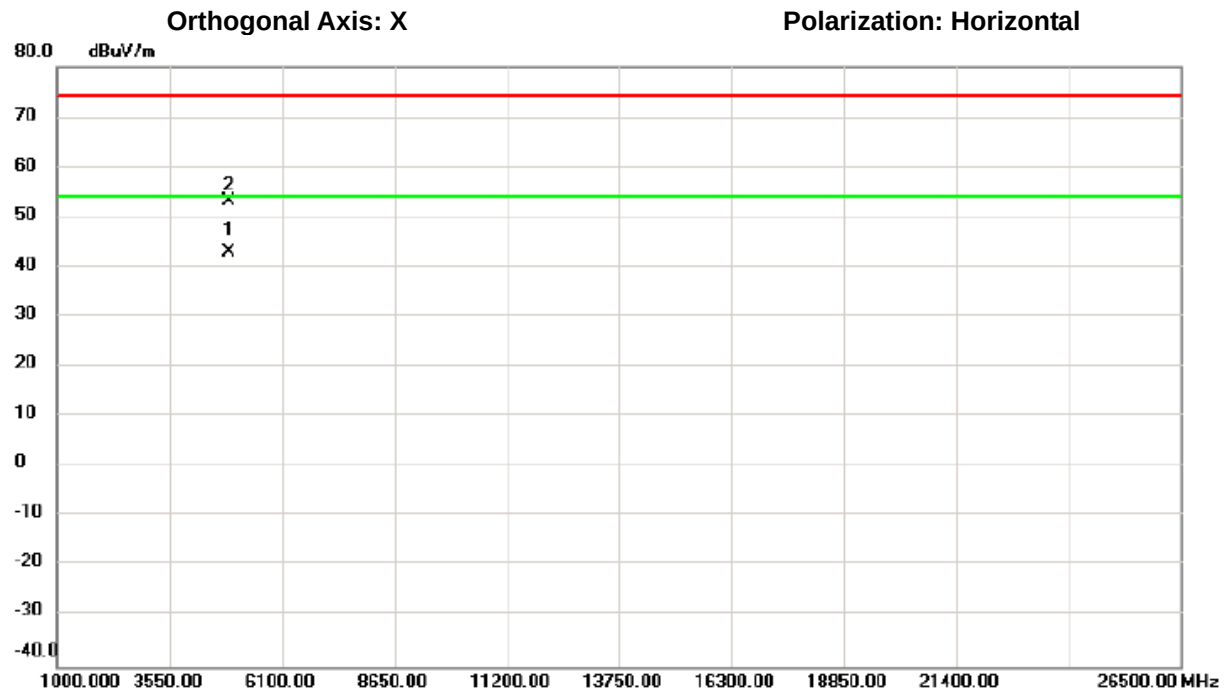

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4898.390	54.94	-11.96	42.98	54.00	-11.02	AVG	
2		4898.835	65.26	-11.96	53.30	74.00	-20.70	peak	

測試頻道: IEEE 802.11ax (HEW40) /
2452 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

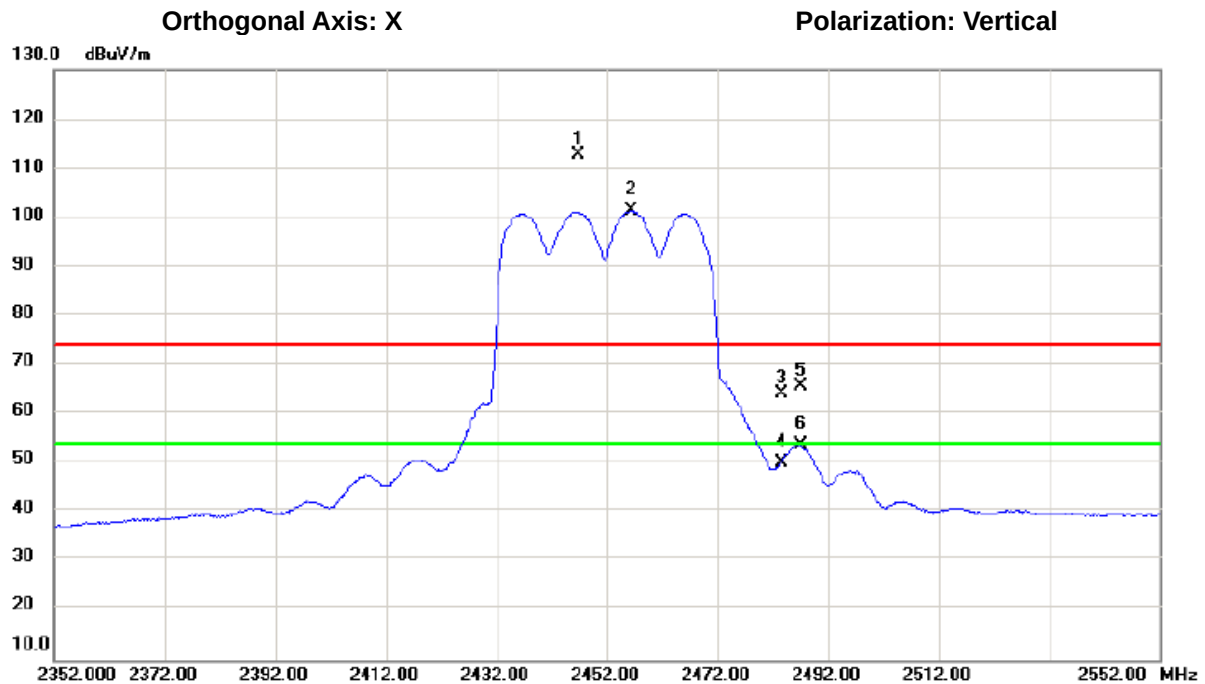

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2446.900	119.76	-7.00	112.76	74.00	38.76	peak	主波訊號不予判定
2	*	2456.400	108.35	-6.95	101.40	54.00	47.40	AVG	主波訊號不予判定
3		2483.500	70.98	-6.85	64.13	74.00	-9.87	peak	
4		2483.500	56.97	-6.85	50.12	54.00	-3.88	AVG	
5		2487.000	72.58	-6.84	65.74	74.00	-8.26	peak	
6		2487.000	60.46	-6.84	53.62	54.00	-0.38	AVG	

測試頻道: IEEE 802.11ax (HEW40) /
 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 3000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/10/29
 環境濕度: 66%

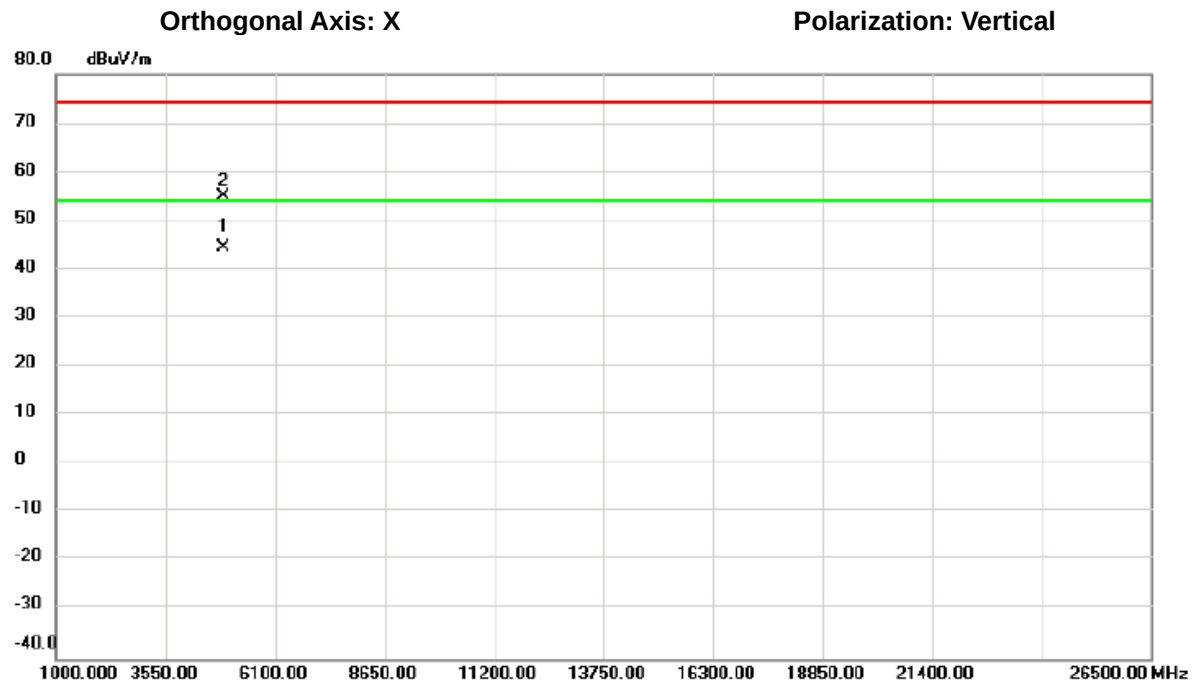

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4907.960	56.52	-11.95	44.57	54.00	-9.43	AVG	
2		4908.475	66.98	-11.95	55.03	74.00	-18.97	peak	

測試頻道: IEEE 802.11ax (HEW40) /
2452 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

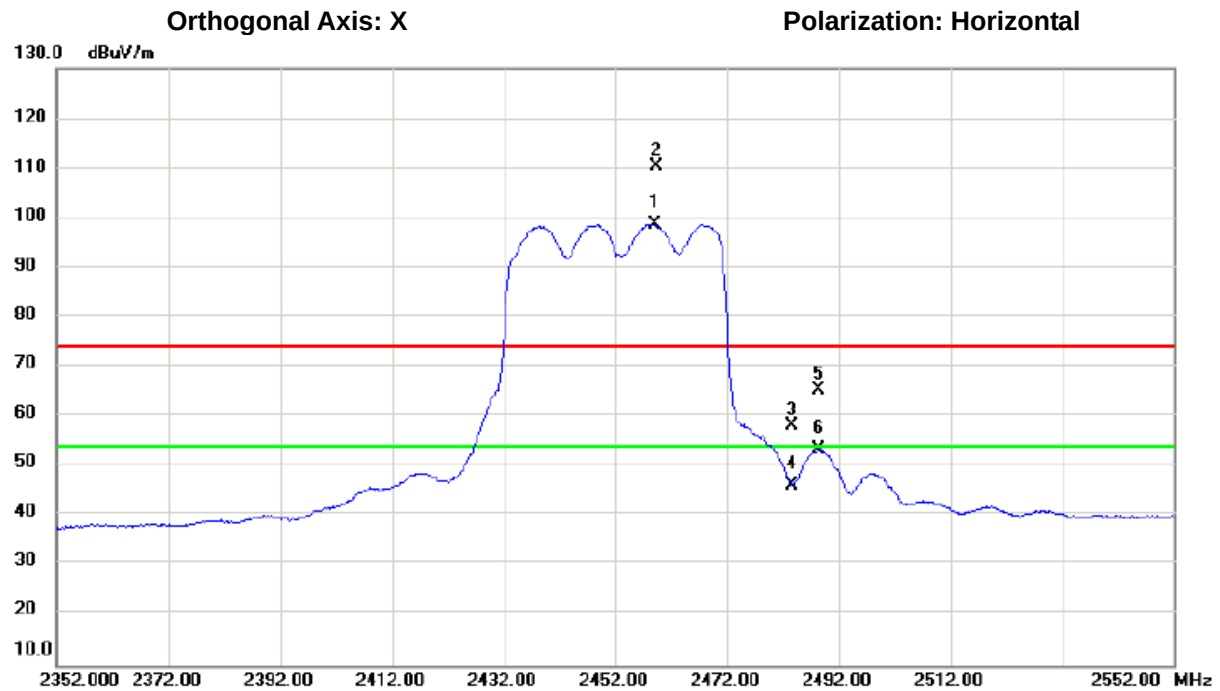


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2459.100	105.71	-6.94	98.77	54.00	44.77	AVG	主波訊號不予判定
2	X	2459.400	117.21	-6.94	110.27	74.00	36.27	peak	主波訊號不予判定
3		2483.500	64.94	-6.85	58.09	74.00	-15.91	peak	
4		2483.500	53.10	-6.85	46.25	54.00	-7.75	AVG	
5		2488.500	72.30	-6.83	65.47	74.00	-8.53	peak	
6		2488.500	60.18	-6.83	53.35	54.00	-0.65	AVG	

測試頻道: IEEE 802.11ax (HEW40) /
2452 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/29
環境濕度: 66%

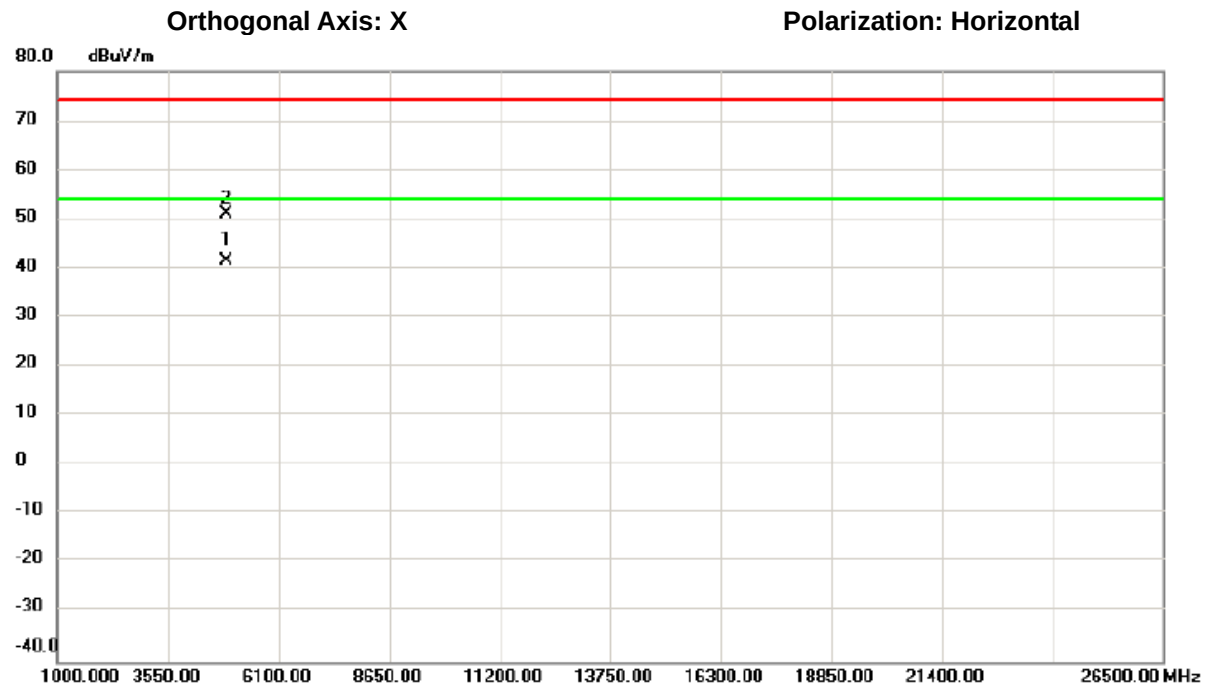


測試頻道:	IEEE 802.11b / 2412 MHz	測試模式:	接收
解析頻寬:	1000 kHz / 1000 kHz	視頻頻寬:	3000 kHz / 10 Hz
量測天線:	Horn Antenna	測試距離:	3 米
檢 測 器:	Peak/AV	測試日期:	108/10/24
環境溫度:	23°C	環境濕度:	66%

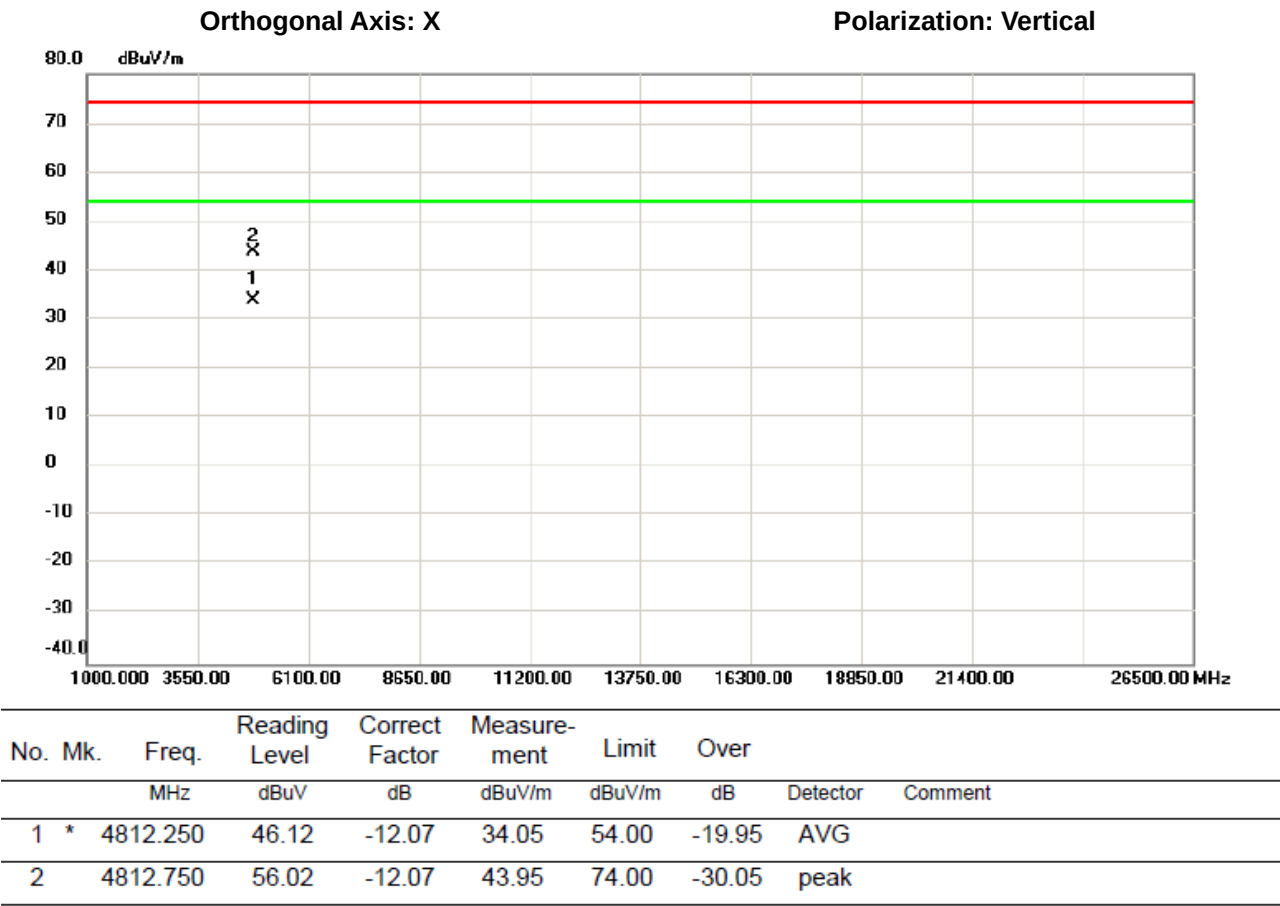

測試頻道: IEEE 802.11b / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 接收
 視頻頻寬: 3000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/10/24
 環境濕度: 66%

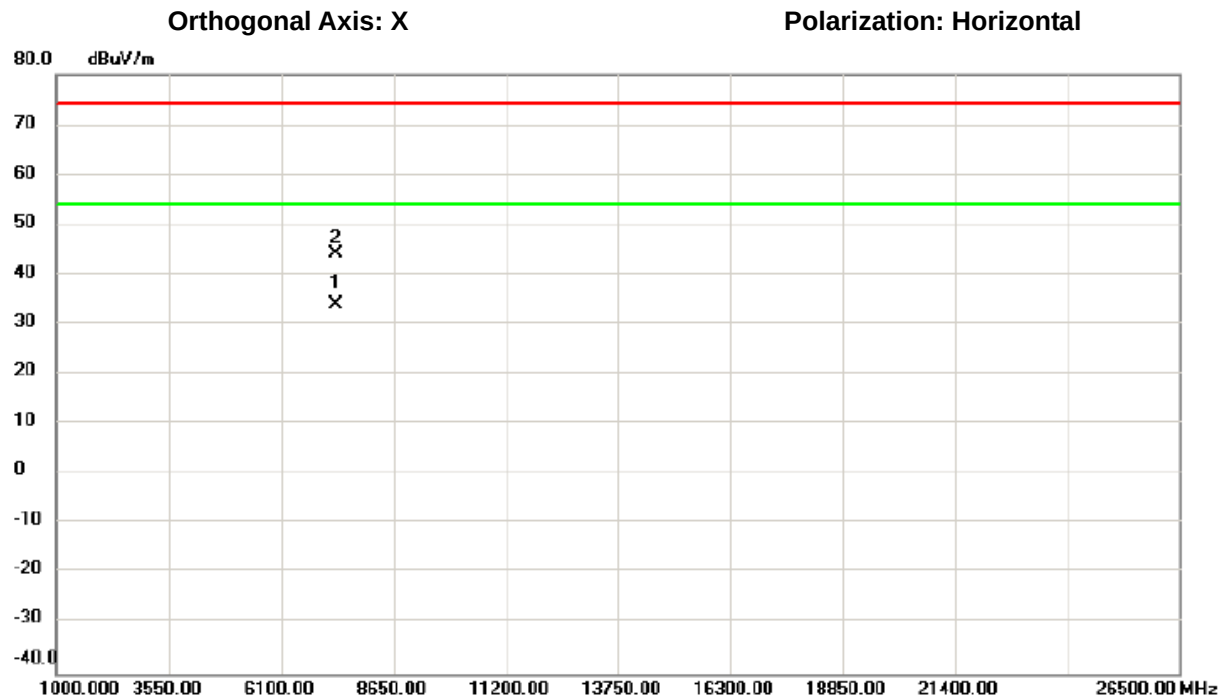

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7324.260	39.41	-5.58	33.83	54.00	-20.17	AVG	
2		7324.450	49.60	-5.58	44.02	74.00	-29.98	peak	

16.4.3 禁用頻帶內之混附發射

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 2310 - 測試模式: 發射
 2390 MHz
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 3000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢 測 器: Peak/AV 測試日期: 108/10/28
 環境溫度: 23°C 環境濕度: 66%

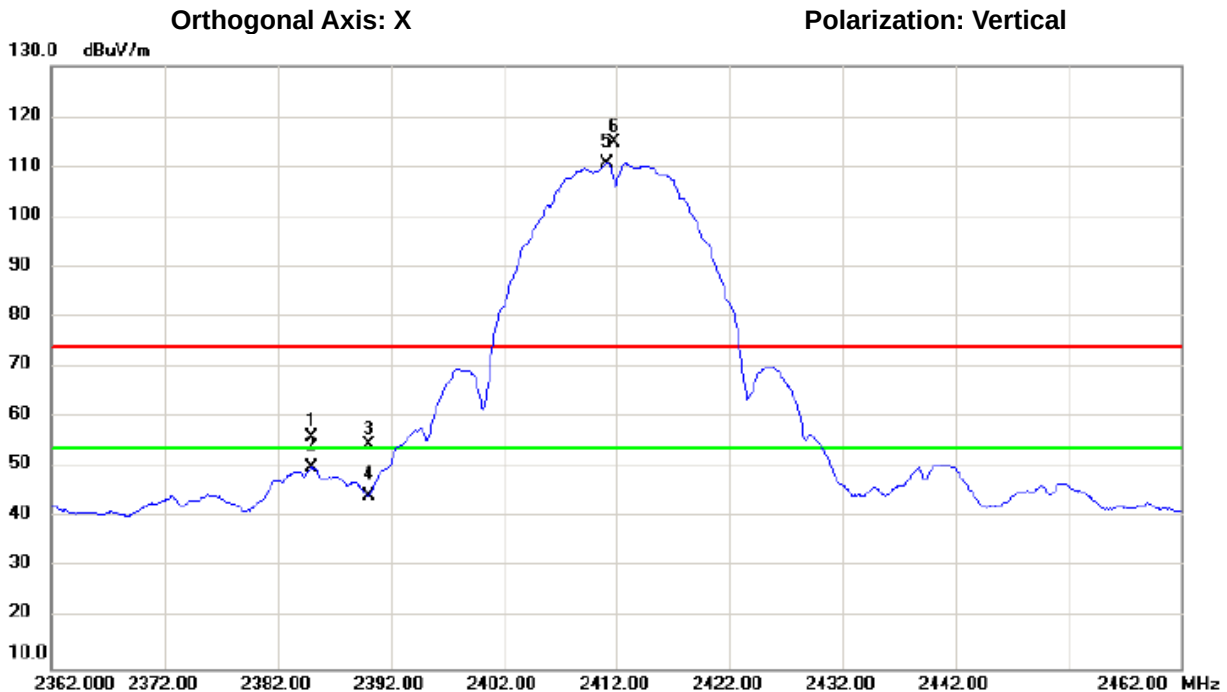


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2384.950	63.25	-7.25	56.00	74.00	-18.00	peak	
2		2384.950	57.22	-7.25	49.97	54.00	-4.03	AVG	
3		2390.000	61.84	-7.23	54.61	74.00	-19.39	peak	
4		2390.000	51.50	-7.23	44.27	54.00	-9.73	AVG	
5	*	2411.200	117.75	-7.15	110.60	54.00	56.60	AVG	主波訊號不予判定
6	X	2411.850	121.88	-7.15	114.73	74.00	40.73	peak	主波訊號不予判定

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 2310 - 測試模式: 發射
 2390 MHz
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 3000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢 測 器: Peak/AV 測試日期: 108/10/28
 環境溫度: 23°C 環境濕度: 66%


Orthogonal Axis: X

Polarization: Horizontal

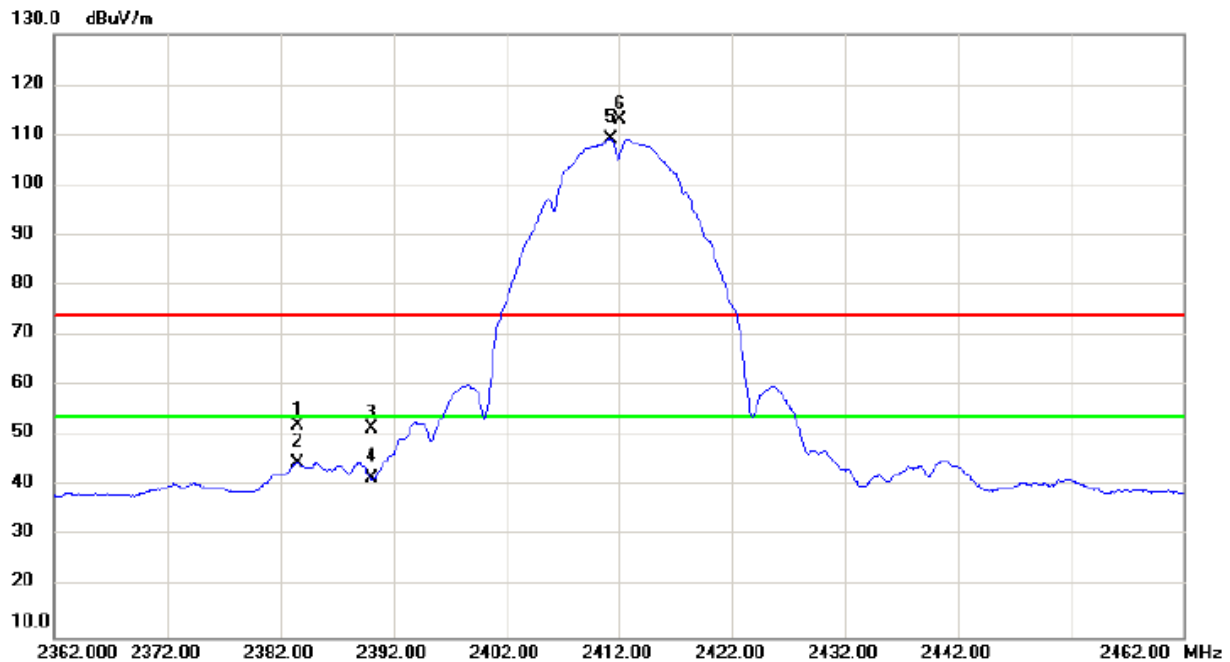


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2383.600	59.38	-7.26	52.12	74.00	-21.88	peak	
2		2383.600	51.89	-7.26	44.63	54.00	-9.37	AVG	
3		2390.000	58.88	-7.23	51.65	74.00	-22.35	peak	
4		2390.000	48.88	-7.23	41.65	54.00	-12.35	AVG	
5	*	2411.250	116.45	-7.15	109.30	54.00	55.30	AVG	主波訊號不予判定
6	X	2412.000	120.23	-7.15	113.08	74.00	39.08	peak	主波訊號不予判定

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 2483.5 - 測試模式: 發射
 2900 MHz
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 3000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢 測 器: Peak/AV 測試日期: 108/10/28
 環境溫度: 23°C 環境濕度: 66%

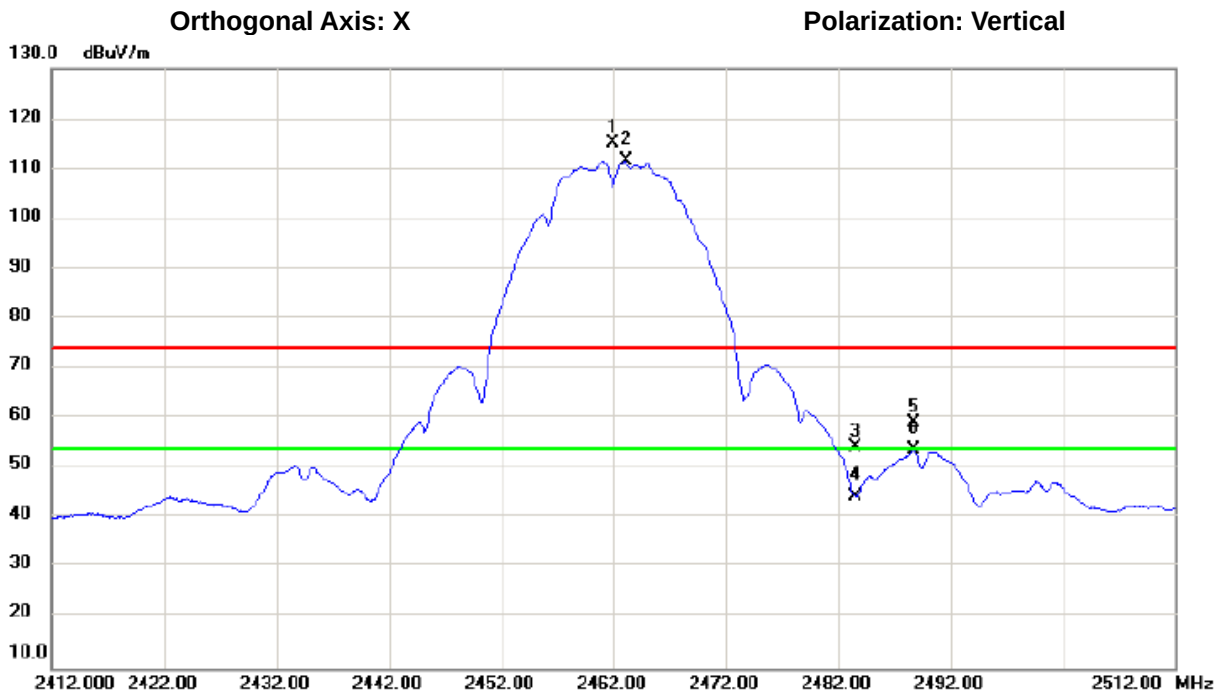


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2461.900	122.12	-6.94	115.18	74.00	41.18	peak	主波訊號不予判定
2	*	2463.100	118.45	-6.93	111.52	54.00	57.52	AVG	主波訊號不予判定
3		2483.500	60.96	-6.85	54.11	74.00	-19.89	peak	
4		2483.500	51.28	-6.85	44.43	54.00	-9.57	AVG	
5		2488.700	65.91	-6.83	59.08	74.00	-14.92	peak	
6		2488.700	60.48	-6.83	53.65	54.00	-0.35	AVG	

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 2483.5 - 測試模式: 發射
 2900 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C
 視頻頻寬: 3000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/10/28
 環境濕度: 66%

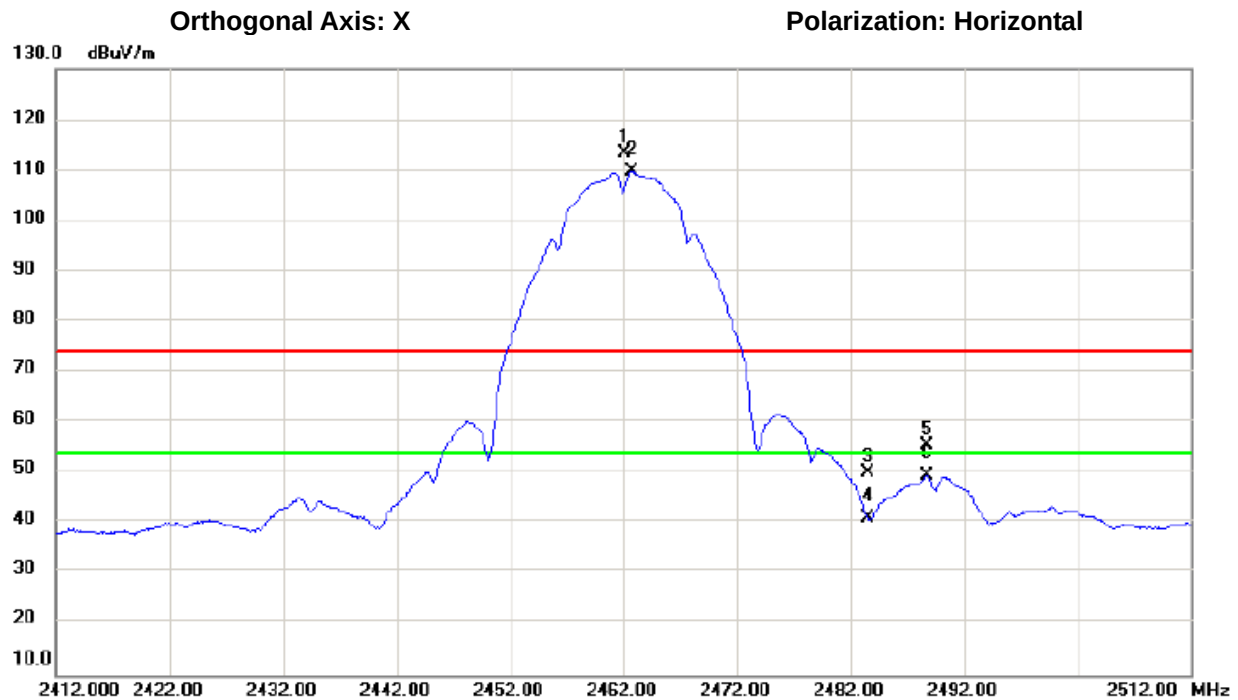


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	120.37	-6.94	113.43	74.00	39.43	peak	主波訊號不予判定
2	*	2462.750	116.60	-6.93	109.67	54.00	55.67	AVG	主波訊號不予判定
3		2483.500	56.99	-6.85	50.14	74.00	-23.86	peak	
4		2483.500	47.89	-6.85	41.04	54.00	-12.96	AVG	
5		2488.750	62.36	-6.83	55.53	74.00	-18.47	peak	
6		2488.750	56.26	-6.83	49.43	54.00	-4.57	AVG	

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 2310 - 測試模式: 發射
 2390 MHz
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 3000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢 測 器: Peak/AV 測試日期: 108/10/28
 環境溫度: 23°C 環境濕度: 66%

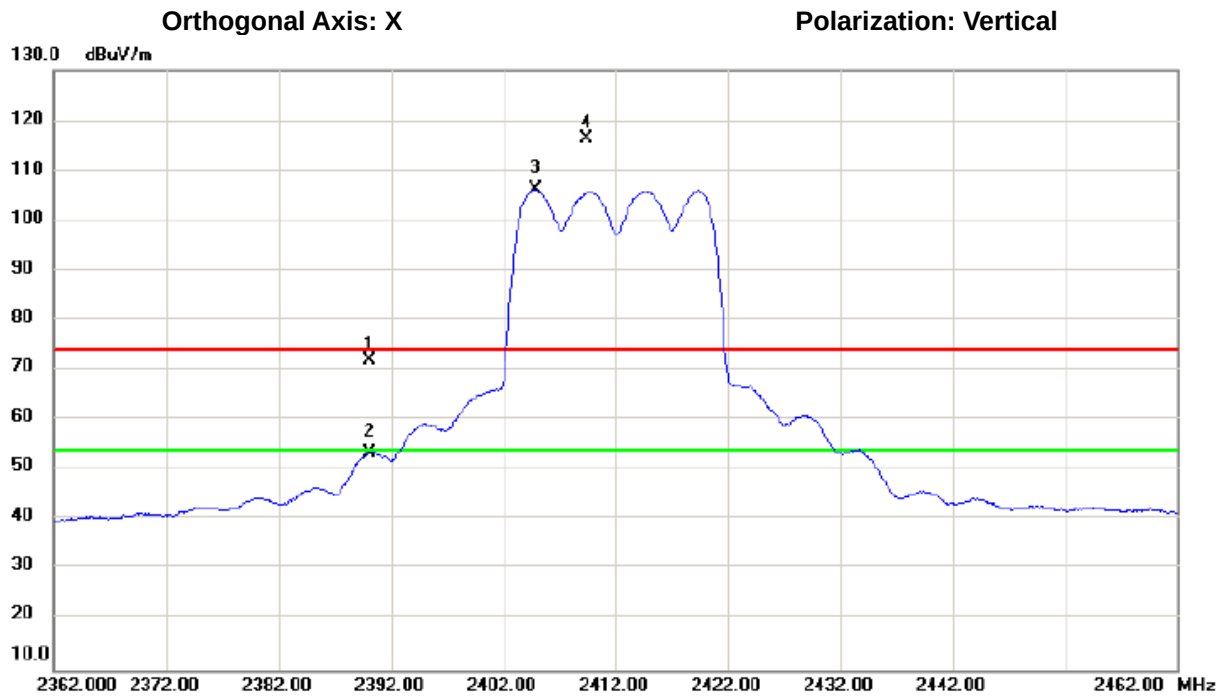


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	79.32	-7.23	72.09	74.00	-1.91	peak	
2		2390.000	60.71	-7.23	53.48	54.00	-0.52	AVG	
3	*	2404.900	113.45	-7.17	106.28	54.00	52.28	AVG	主波訊號不予判定
4	X	2409.450	123.51	-7.15	116.36	74.00	42.36	peak	主波訊號不予判定

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 2310 - 測試模式: 發射
 2390 MHz
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 3000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢 測 器: Peak/AV 測試日期: 108/10/28
 環境溫度: 23°C 環境濕度: 66%

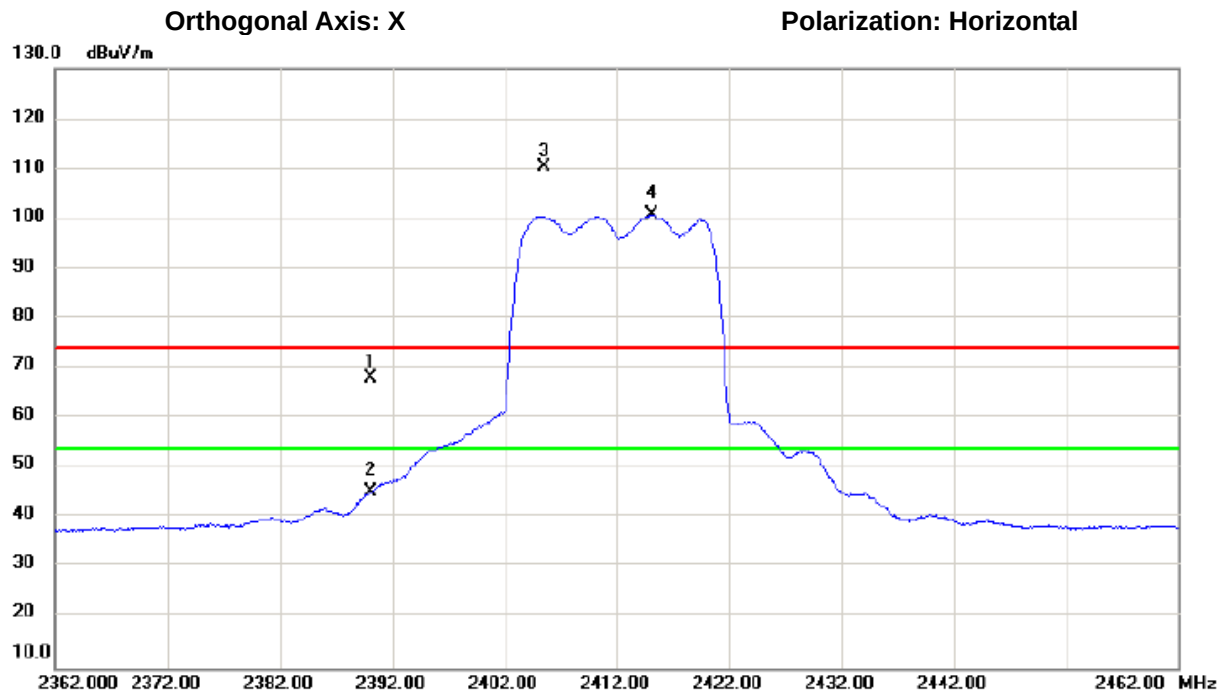


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	75.19	-7.23	67.96	74.00	-6.04	peak	
2		2390.000	52.45	-7.23	45.22	54.00	-8.78	AVG	
3	X	2405.550	117.40	-7.16	110.24	74.00	36.24	peak	主波訊號不予判定
4	*	2415.150	108.00	-7.13	100.87	54.00	46.87	AVG	主波訊號不予判定

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 2483.5 - 測試模式: 發射
 2900 MHz
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 3000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢 測 器: Peak/AV 測試日期: 108/10/28
 環境溫度: 23°C 環境濕度: 66%

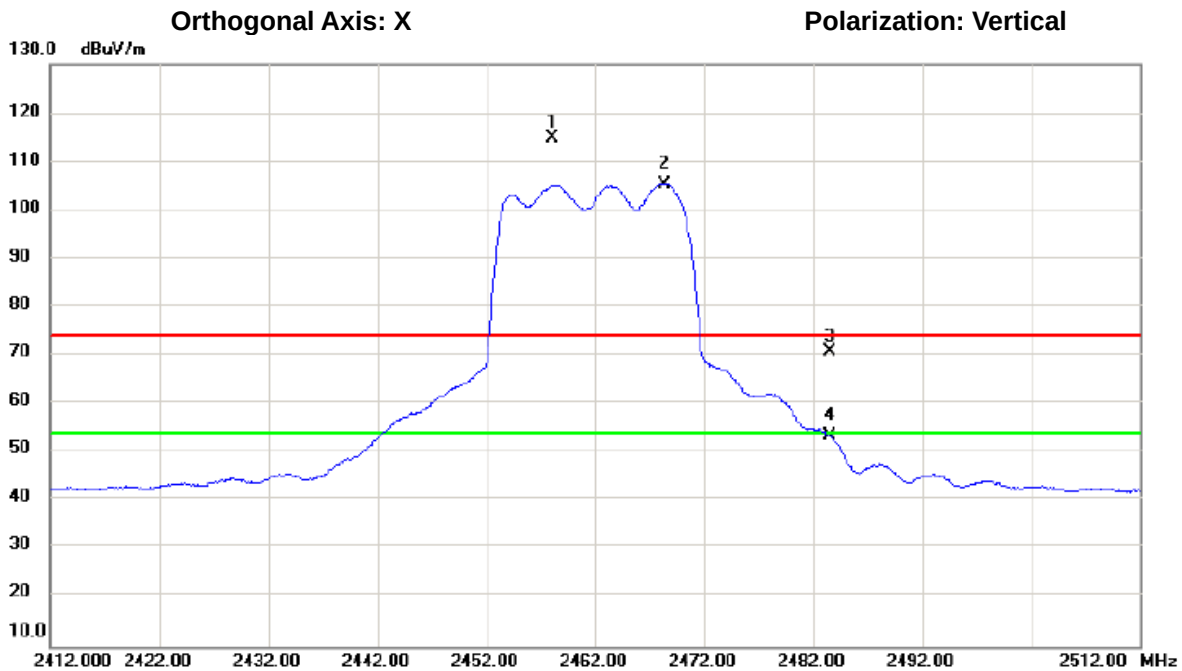

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2458.000	121.66	-6.95	114.71	74.00	40.71	peak	主波訊號不予判定
2	*	2468.350	112.25	-6.91	105.34	54.00	51.34	AVG	主波訊號不予判定
3		2483.500	77.54	-6.85	70.69	74.00	-3.31	peak	
4		2483.500	60.13	-6.85	53.28	54.00	-0.72	AVG	

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 2483.5 - 測試模式: 發射
 2900 MHz
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 3000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢 測 器: Peak/AV 測試日期: 108/10/28
 環境溫度: 23°C 環境濕度: 66%

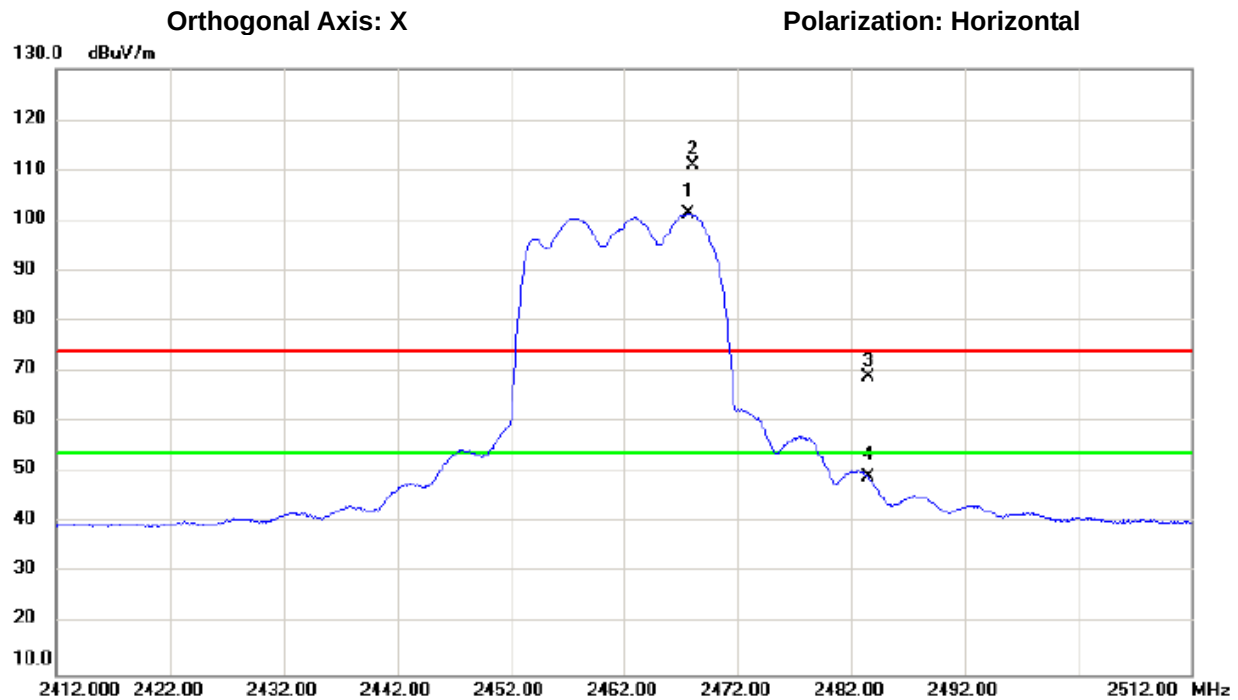


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2467.700	108.34	-6.91	101.43	54.00	47.43	AVG	主波訊號不予判定
2	X	2468.050	117.75	-6.91	110.84	74.00	36.84	peak	主波訊號不予判定
3		2483.500	75.78	-6.85	68.93	74.00	-5.07	peak	
4		2483.500	56.09	-6.85	49.24	54.00	-4.76	AVG	

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

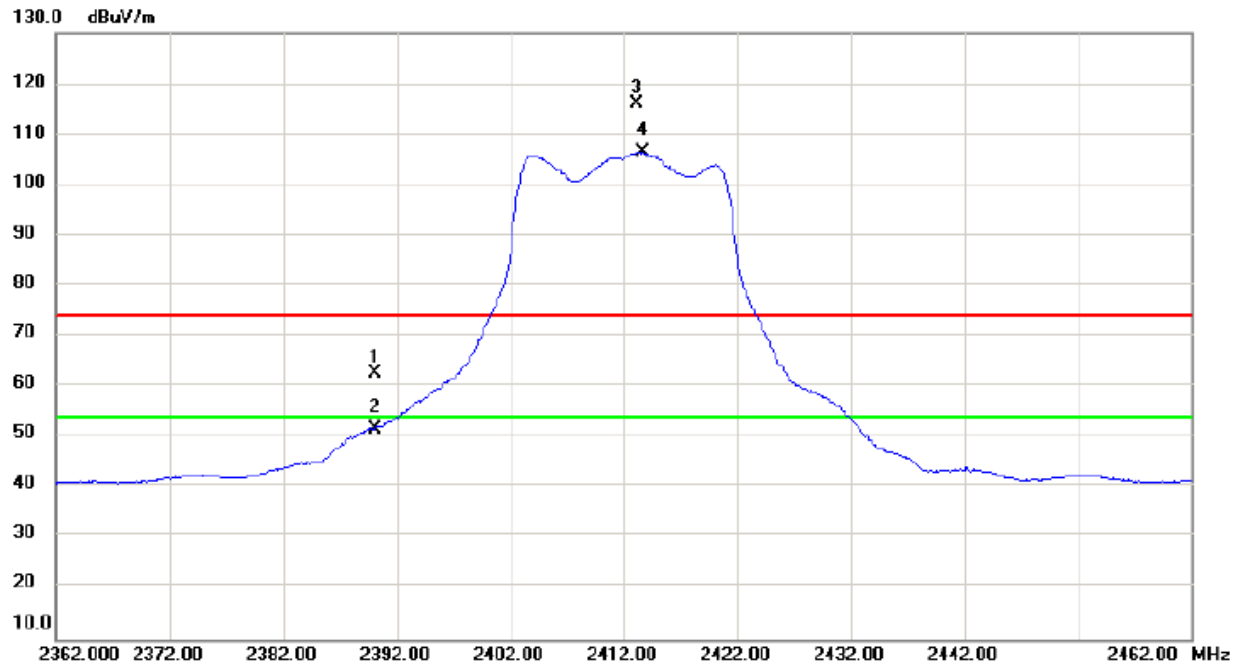

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	69.98	-7.23	62.75	74.00	-11.25	peak	
2		2390.000	58.84	-7.23	51.61	54.00	-2.39	AVG	
3	X	2413.200	123.04	-7.13	115.91	74.00	41.91	peak	主波訊號不予判定
4	*	2413.700	113.57	-7.13	106.44	54.00	52.44	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

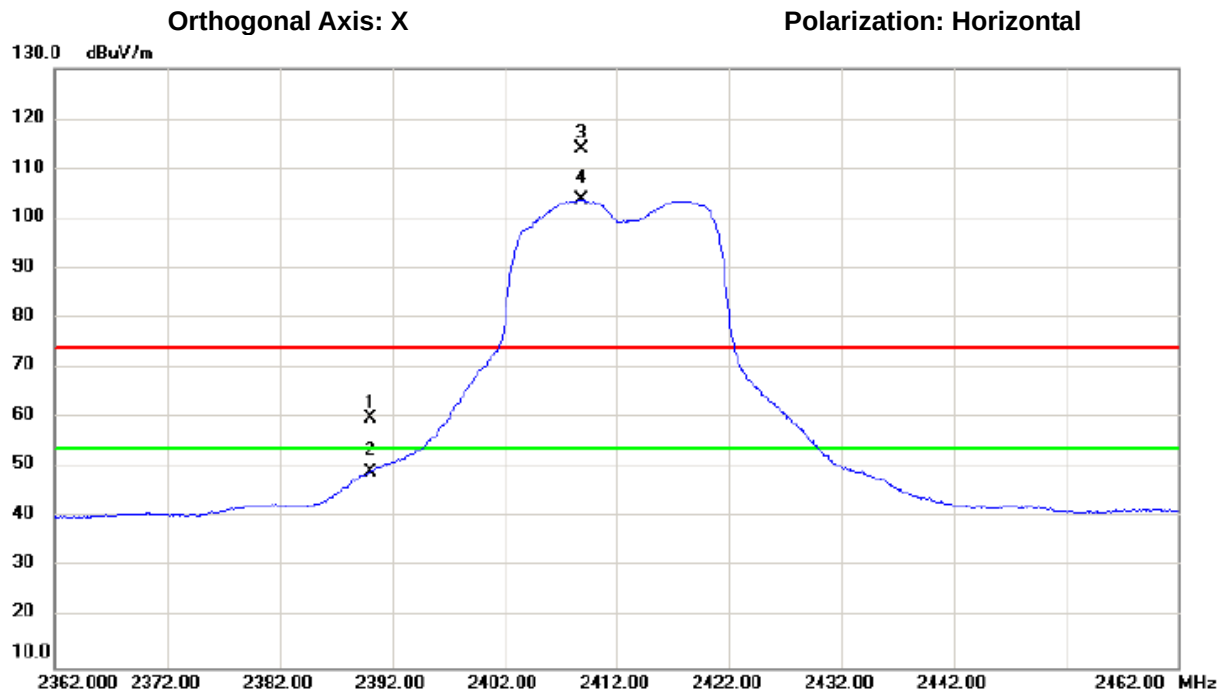


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	67.15	-7.23	59.92	74.00	-14.08	peak	
2		2390.000	56.44	-7.23	49.21	54.00	-4.79	AVG	
3	X	2408.800	120.97	-7.16	113.81	74.00	39.81	peak	主波訊號不予判定
4	*	2408.800	110.97	-7.16	103.81	54.00	49.81	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶/2483.5 - 2900 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

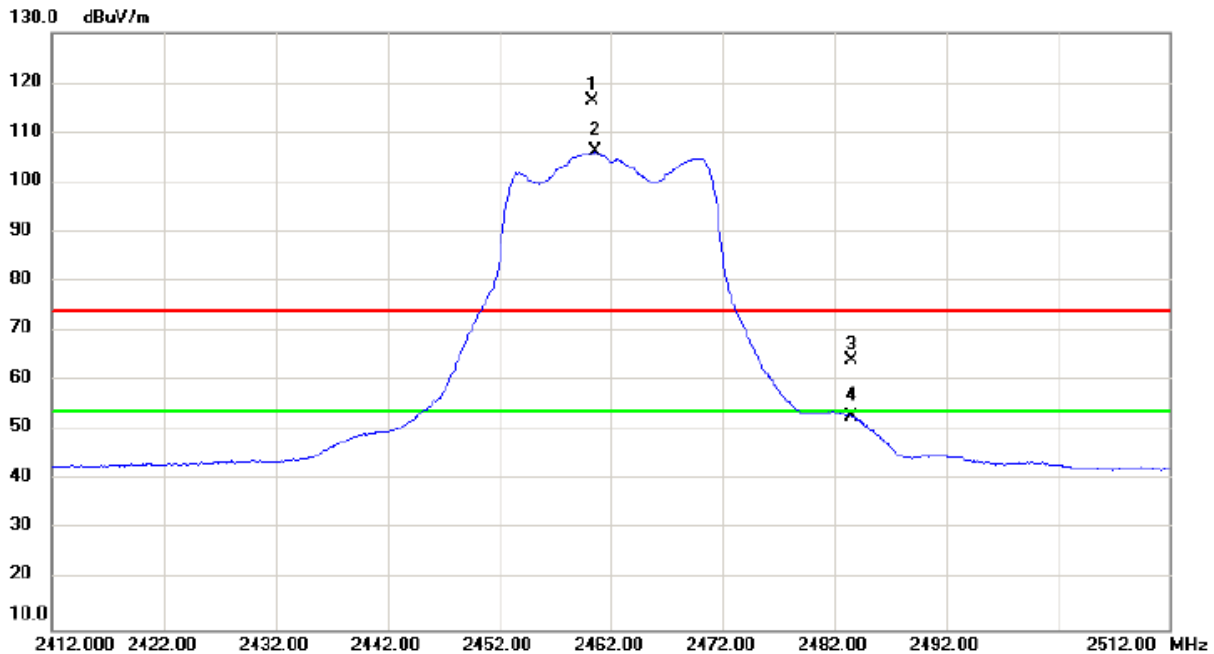


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2460.300	123.23	-6.94	116.29	74.00	42.29	peak	主波訊號不予判定
2	*	2460.600	112.95	-6.94	106.01	54.00	52.01	AVG	主波訊號不予判定
3		2483.500	71.04	-6.85	64.19	74.00	-9.81	peak	
4		2483.500	59.73	-6.85	52.88	54.00	-1.12	AVG	

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶/2483.5 - 2900 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

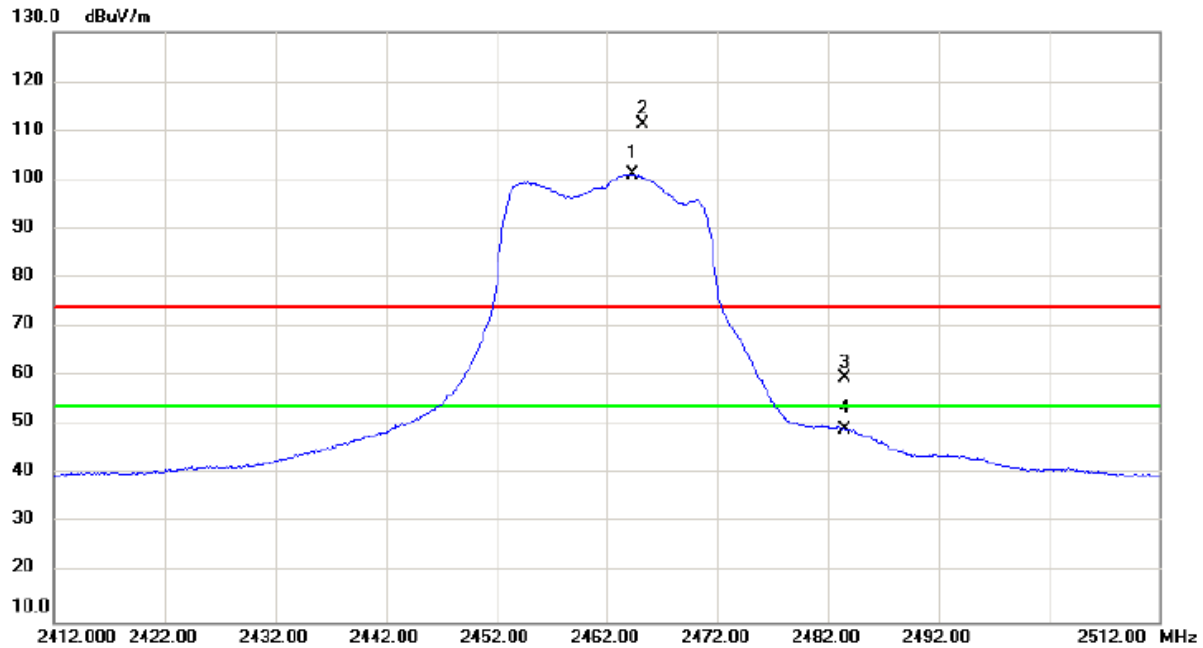

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2464.300	108.04	-6.93	101.11	54.00	47.11	AVG	主波訊號不予判定
2	X	2465.300	118.21	-6.93	111.28	74.00	37.28	peak	主波訊號不予判定
3		2483.500	66.62	-6.85	59.77	74.00	-14.23	peak	
4		2483.500	55.97	-6.85	49.12	54.00	-4.88	AVG	

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

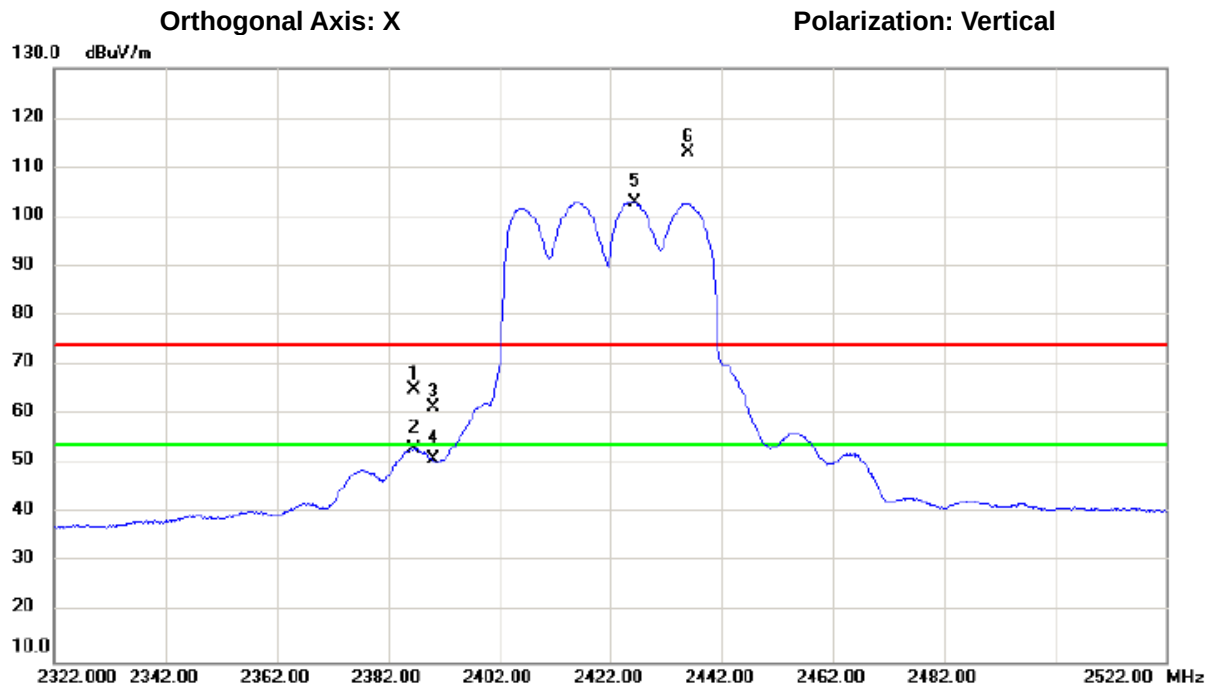


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2386.600	72.15	-7.24	64.91	74.00	-9.09	peak	
2		2386.600	60.41	-7.24	53.17	54.00	-0.83	AVG	
3		2390.000	68.82	-7.23	61.59	74.00	-12.41	peak	
4		2390.000	58.21	-7.23	50.98	54.00	-3.02	AVG	
5	*	2426.300	110.05	-7.08	102.97	54.00	48.97	AVG	主波訊號不予判定
6	X	2436.000	120.00	-7.04	112.96	74.00	38.96	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

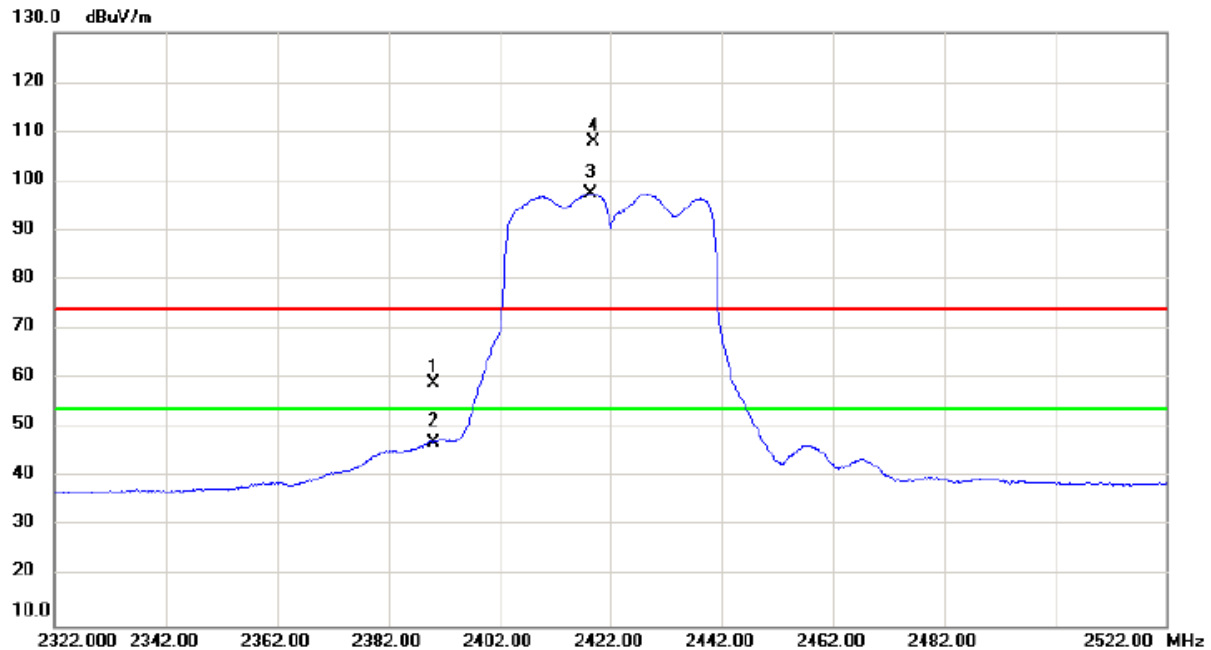

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	66.37	-7.23	59.14	74.00	-14.86	peak	
2		2390.000	54.42	-7.23	47.19	54.00	-6.81	AVG	
3	*	2418.400	104.60	-7.11	97.49	54.00	43.49	AVG	主波訊號不予判定
4	X	2418.800	115.13	-7.11	108.02	74.00	34.02	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶/2483.5 - 2900 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

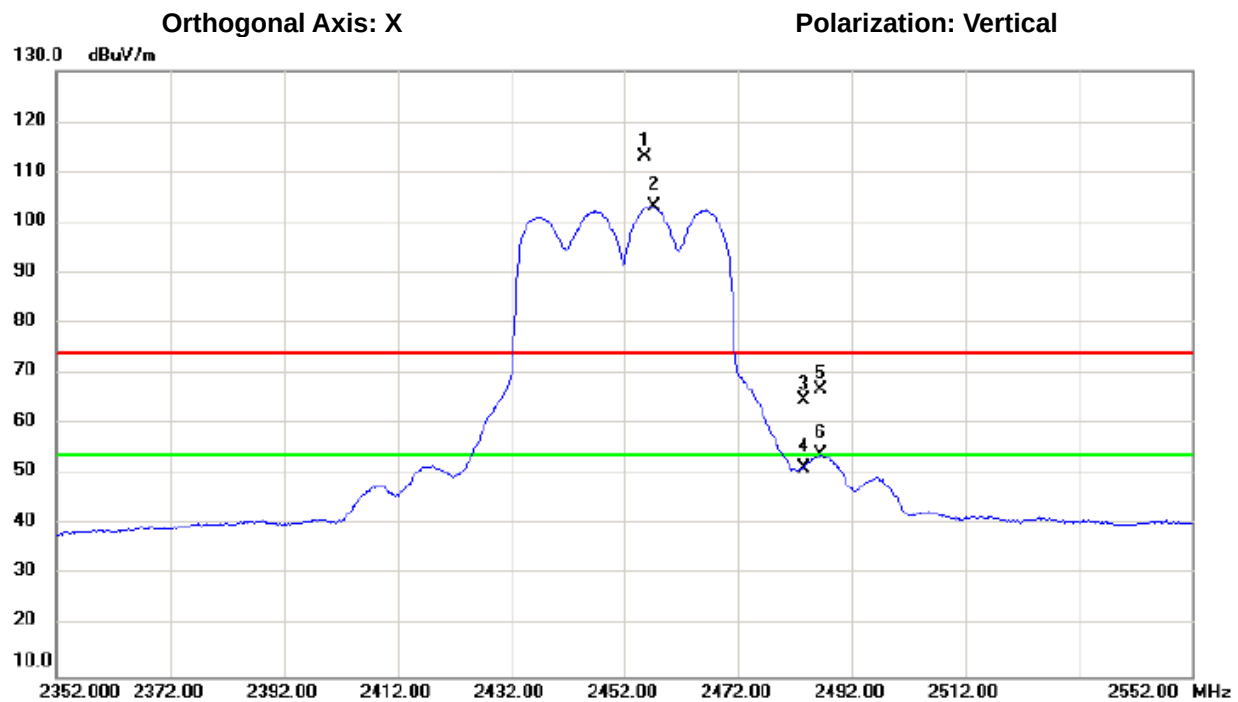

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2455.600	119.93	-6.95	112.98	74.00	38.98	peak	主波訊號不予判定
2	*	2457.200	110.13	-6.95	103.18	54.00	49.18	AVG	主波訊號不予判定
3		2483.500	71.63	-6.85	64.78	74.00	-9.22	peak	
4		2483.500	58.25	-6.85	51.40	54.00	-2.60	AVG	
5		2486.600	73.61	-6.84	66.77	74.00	-7.23	peak	
6		2486.600	60.76	-6.84	53.92	54.00	-0.08	AVG	

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶/2483.5 - 2900 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

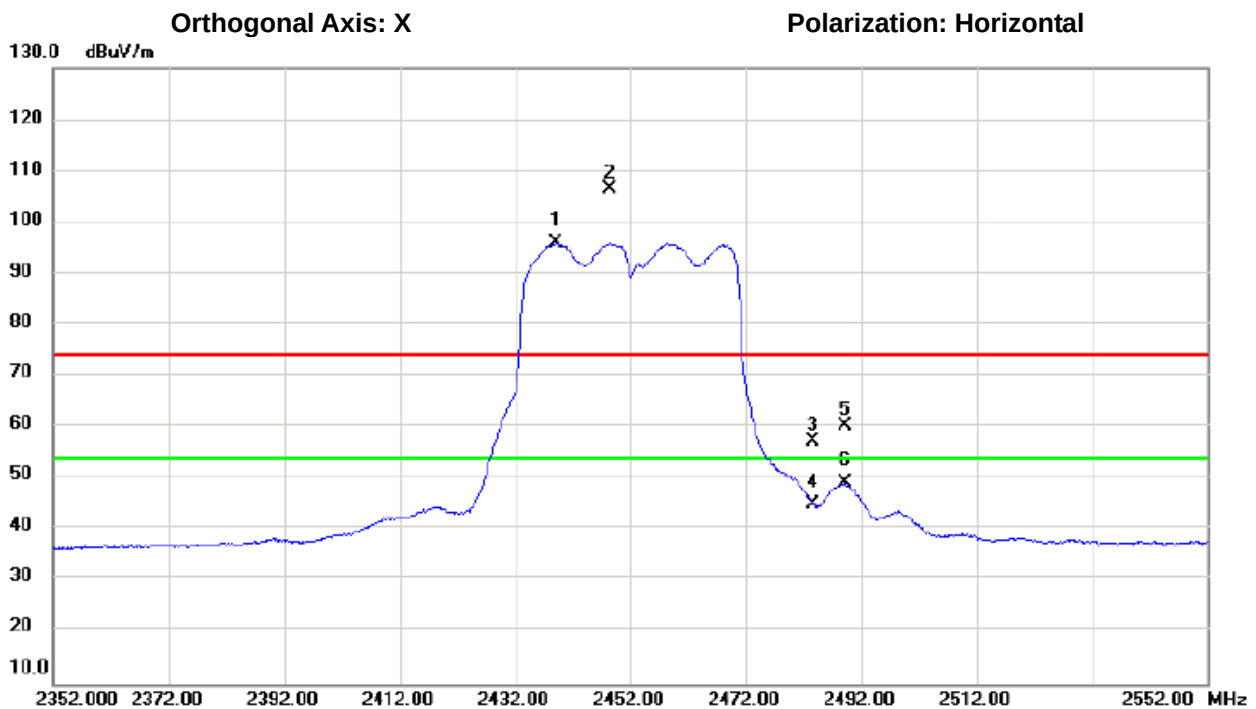


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2439.200	102.99	-7.02	95.97	54.00	41.97	AVG	主波訊號不予判定
2	X	2448.300	113.33	-6.99	106.34	74.00	32.34	peak	主波訊號不予判定
3		2483.500	64.03	-6.85	57.18	74.00	-16.82	peak	
4		2483.500	51.82	-6.85	44.97	54.00	-9.03	AVG	
5		2489.200	66.96	-6.83	60.13	74.00	-13.87	peak	
6		2489.200	55.84	-6.83	49.01	54.00	-4.99	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

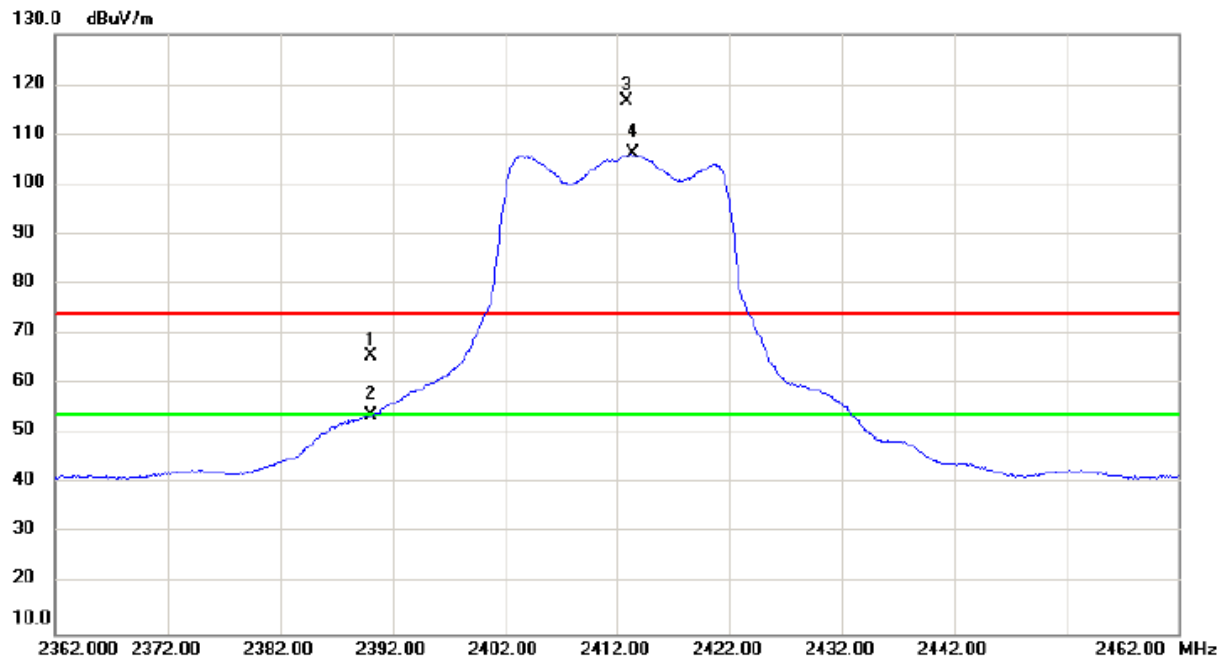

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	72.95	-7.23	65.72	74.00	-8.28	peak	
2		2390.000	60.90	-7.23	53.67	54.00	-0.33	AVG	
3	X	2412.900	123.70	-7.13	116.57	74.00	42.57	peak	主波訊號不予判定
4	*	2413.350	113.23	-7.13	106.10	54.00	52.10	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

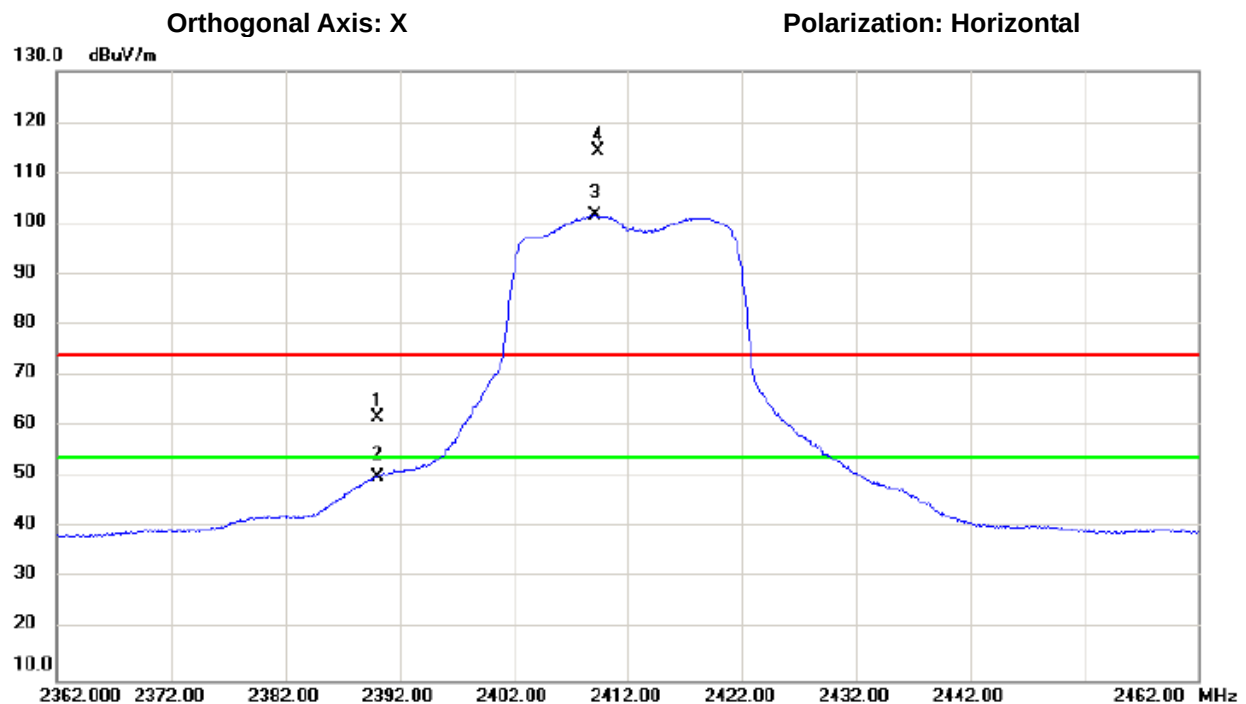

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	68.90	-7.23	61.67	74.00	-12.33	peak	
2		2390.000	57.41	-7.23	50.18	54.00	-3.82	AVG	
3	*	2409.200	108.76	-7.15	101.61	54.00	47.61	AVG	主波訊號不予判定
4	X	2409.400	121.43	-7.15	114.28	74.00	40.28	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW20) /
2.4 GHz 頻帶/2483.5 - 2900 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

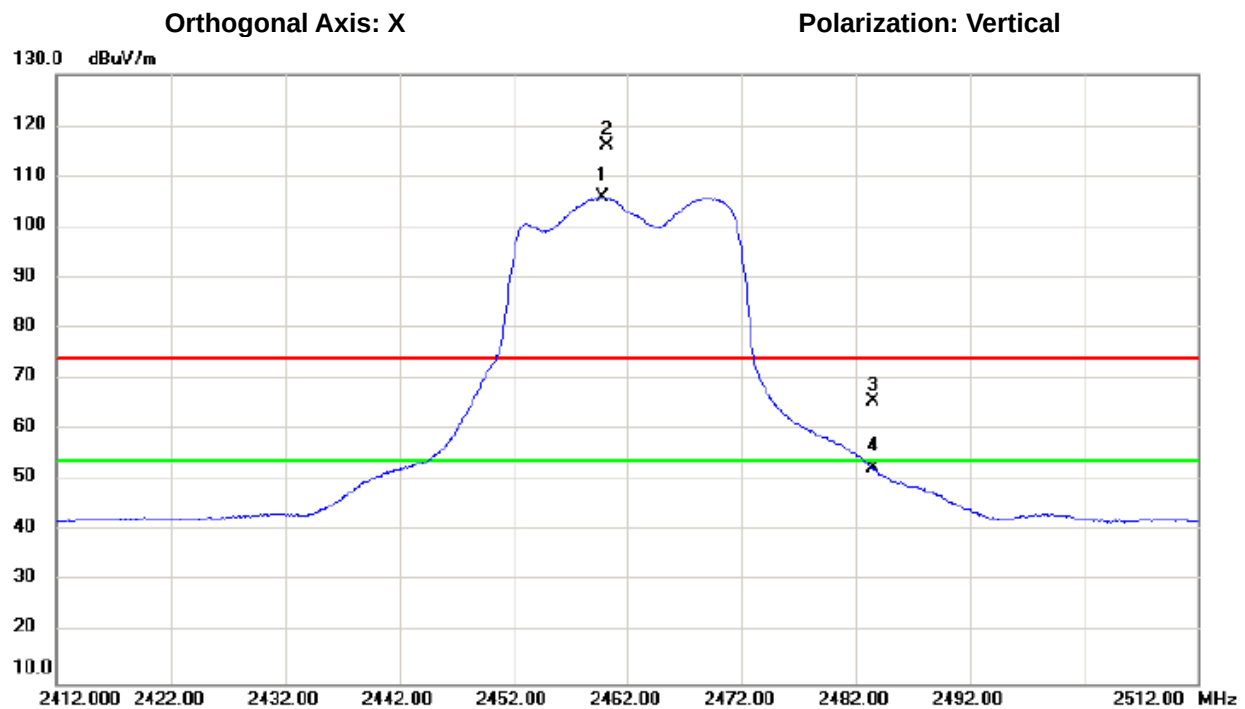

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2459.800	112.76	-6.94	105.82	54.00	51.82	AVG	主波訊號不予判定
2	X	2460.150	123.05	-6.94	116.11	74.00	42.11	peak	主波訊號不予判定
3		2483.500	72.53	-6.85	65.68	74.00	-8.32	peak	
4		2483.500	59.23	-6.85	52.38	54.00	-1.62	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
2.4 GHz 頻帶/2483.5 - 2900 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

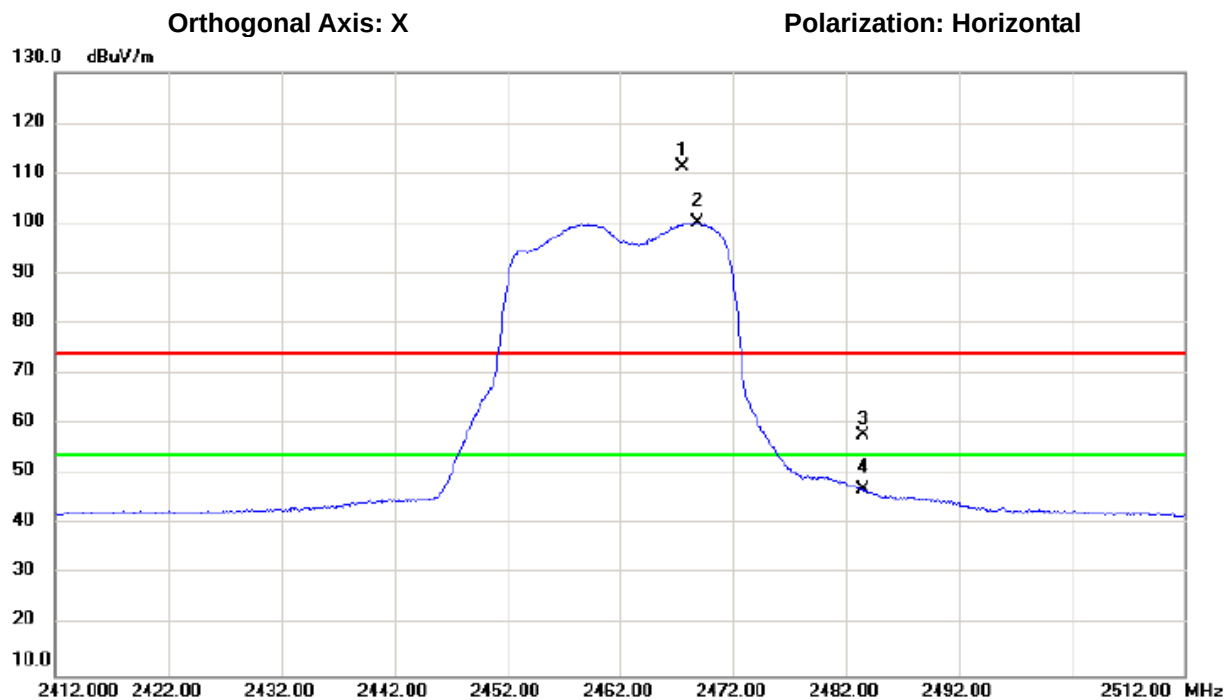


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2467.600	118.10	-6.91	111.19	74.00	37.19	peak	主波訊號不予判定
2	*	2468.800	107.06	-6.91	100.15	54.00	46.15	AVG	主波訊號不予判定
3		2483.500	64.83	-6.85	57.98	74.00	-16.02	peak	
4		2483.500	53.78	-6.85	46.93	54.00	-7.07	AVG	

測試頻道: IEEE 802.11ax (HEW40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

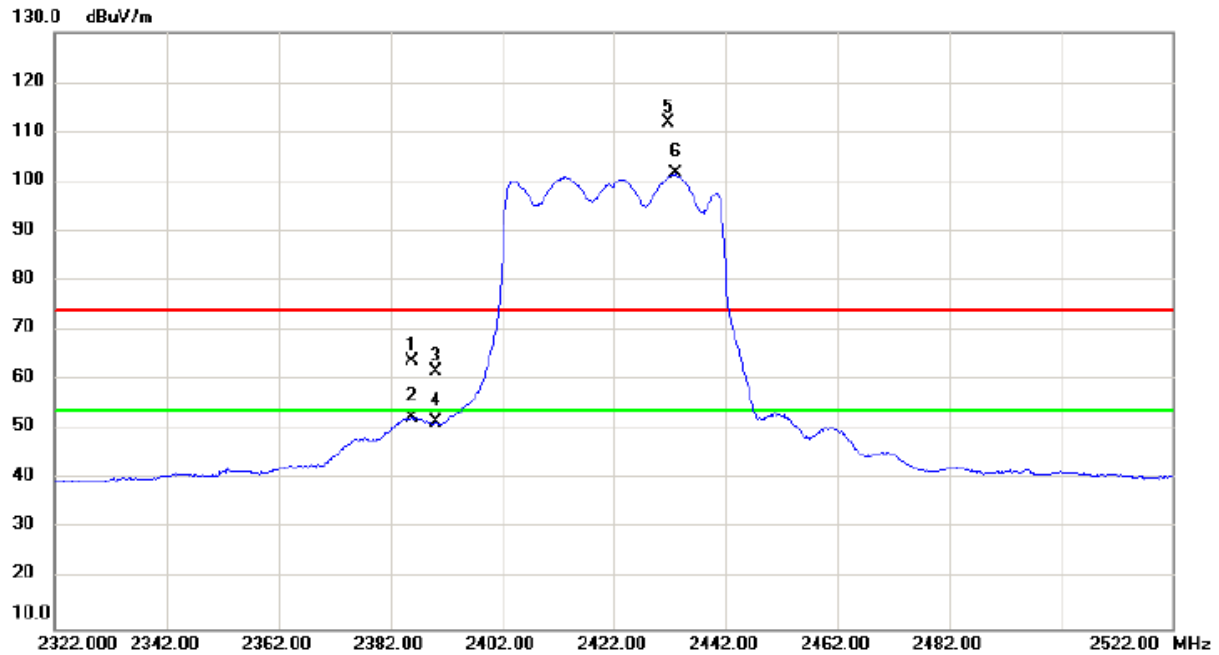

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2385.800	71.14	-7.24	63.90	74.00	-10.10	peak	
2		2385.800	59.60	-7.24	52.36	54.00	-1.64	AVG	
3		2390.000	69.11	-7.23	61.88	74.00	-12.12	peak	
4		2390.000	58.71	-7.23	51.48	54.00	-2.52	AVG	
5	X	2431.800	118.93	-7.06	111.87	74.00	37.87	peak	主波訊號不予判定
6	*	2433.100	108.59	-7.06	101.53	54.00	47.53	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

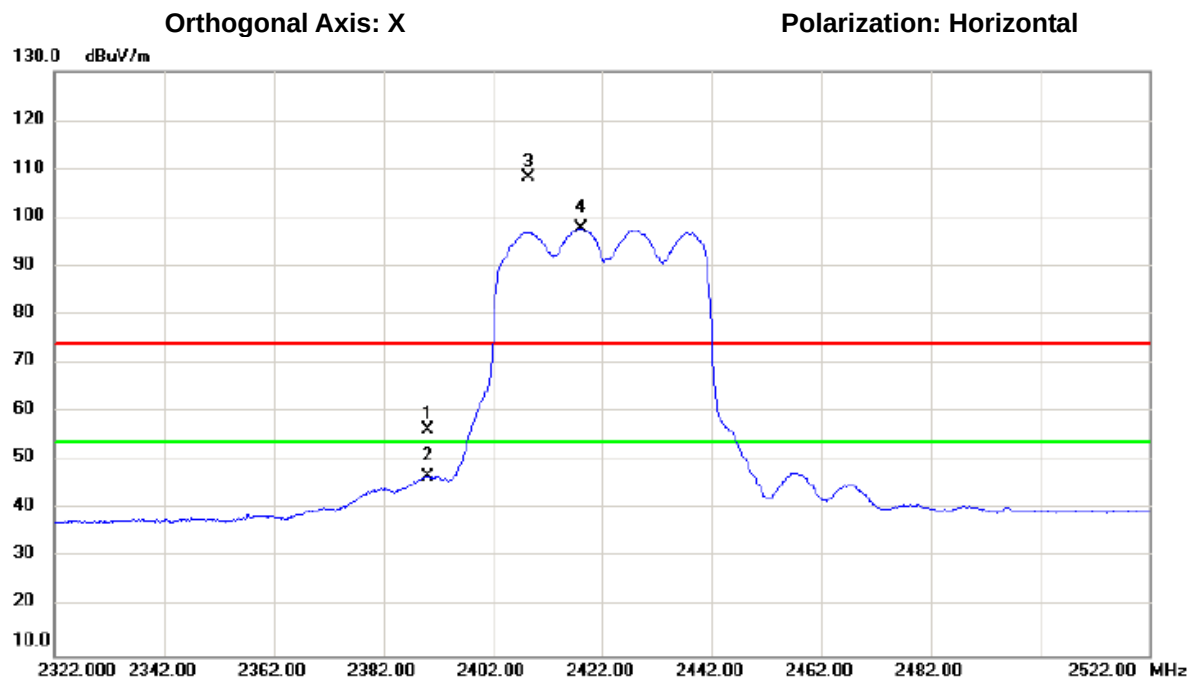

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	63.57	-7.23	56.34	74.00	-17.66	peak	
2		2390.000	54.00	-7.23	46.77	54.00	-7.23	AVG	
3	X	2408.400	115.51	-7.16	108.35	74.00	34.35	peak	主波訊號不予判定
4	*	2418.200	104.99	-7.11	97.88	54.00	43.88	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW40) /
2.4 GHz 頻帶/2483.5 - 2900 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

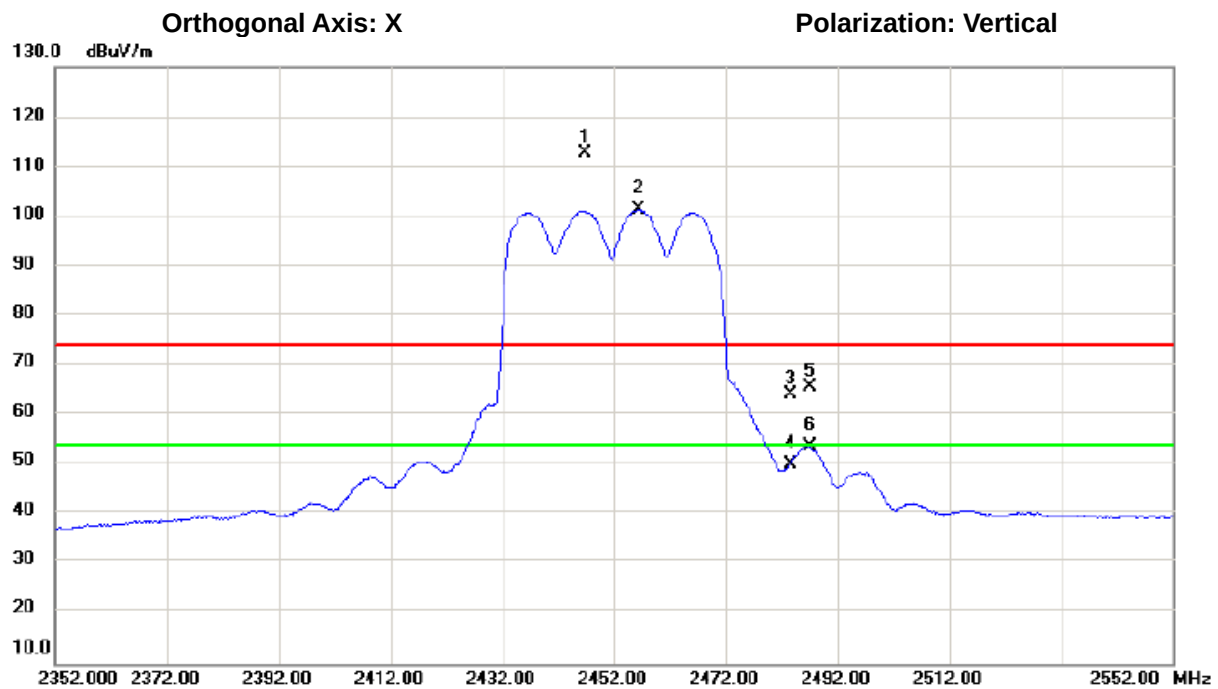

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2446.900	119.76	-7.00	112.76	74.00	38.76	peak	主波訊號不予判定
2	*	2456.400	108.35	-6.95	101.40	54.00	47.40	AVG	主波訊號不予判定
3		2483.500	70.98	-6.85	64.13	74.00	-9.87	peak	
4		2483.500	56.97	-6.85	50.12	54.00	-3.88	AVG	
5		2487.000	72.58	-6.84	65.74	74.00	-8.26	peak	
6		2487.000	60.46	-6.84	53.62	54.00	-0.38	AVG	

測試頻道: IEEE 802.11ax (HEW40) /
2.4 GHz 頻帶/2483.5 - 2900 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 3000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/10/28
環境濕度: 66%

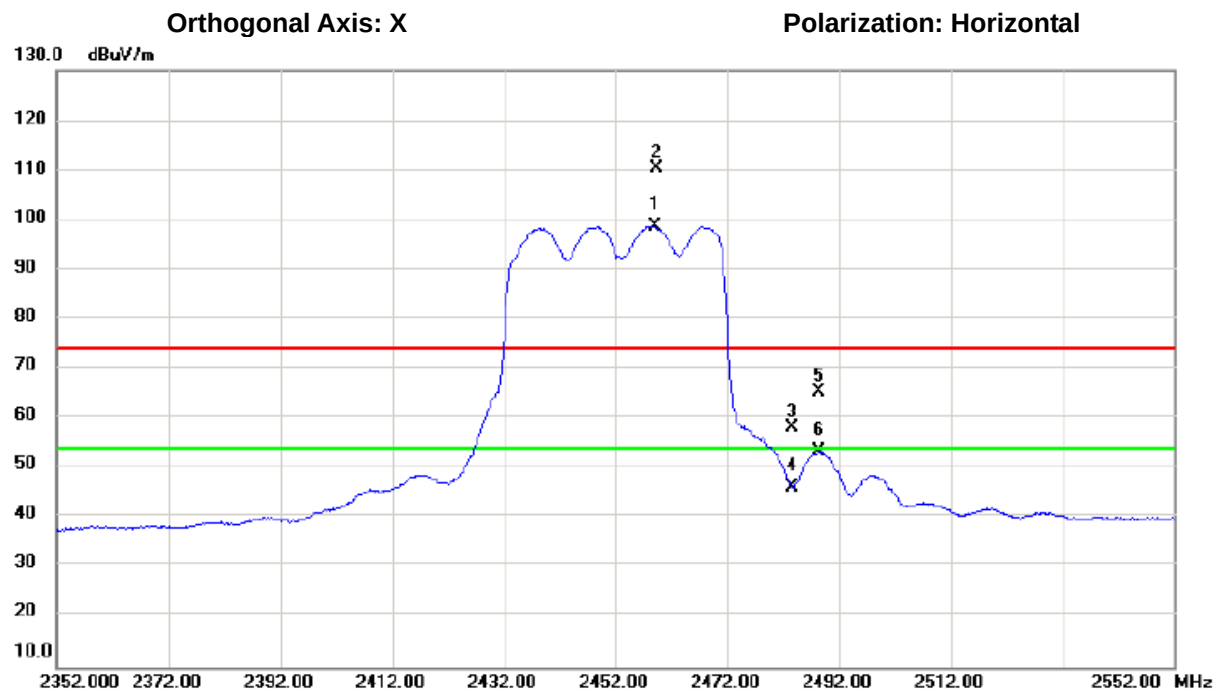

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2459.100	105.71	-6.94	98.77	54.00	44.77	AVG	主波訊號不予判定
2	X	2459.400	117.21	-6.94	110.27	74.00	36.27	peak	主波訊號不予判定
3		2483.500	64.94	-6.85	58.09	74.00	-15.91	peak	
4		2483.500	53.10	-6.85	46.25	54.00	-7.75	AVG	
5		2488.500	72.30	-6.83	65.47	74.00	-8.53	peak	
6		2488.500	60.18	-6.83	53.35	54.00	-0.65	AVG	