



Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

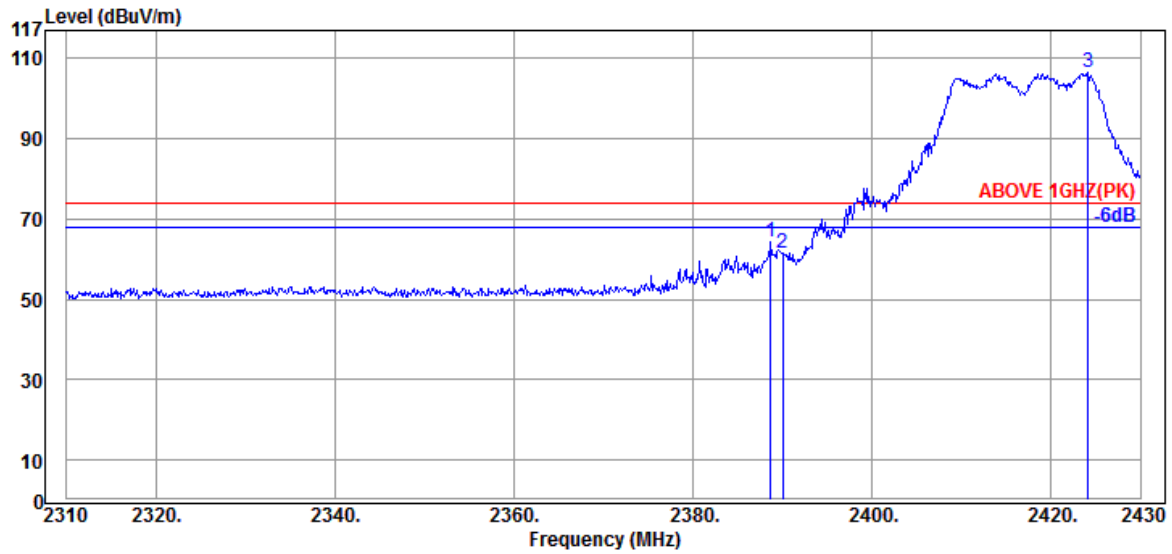

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.72	32.16	6.57	25.67	64.40	74.00	9.60	Peak
2390.04	32.16	6.57	22.95	61.68	74.00	12.32	Peak
@ 2424.12	32.20	6.61	67.56	106.37	---	---	Peak

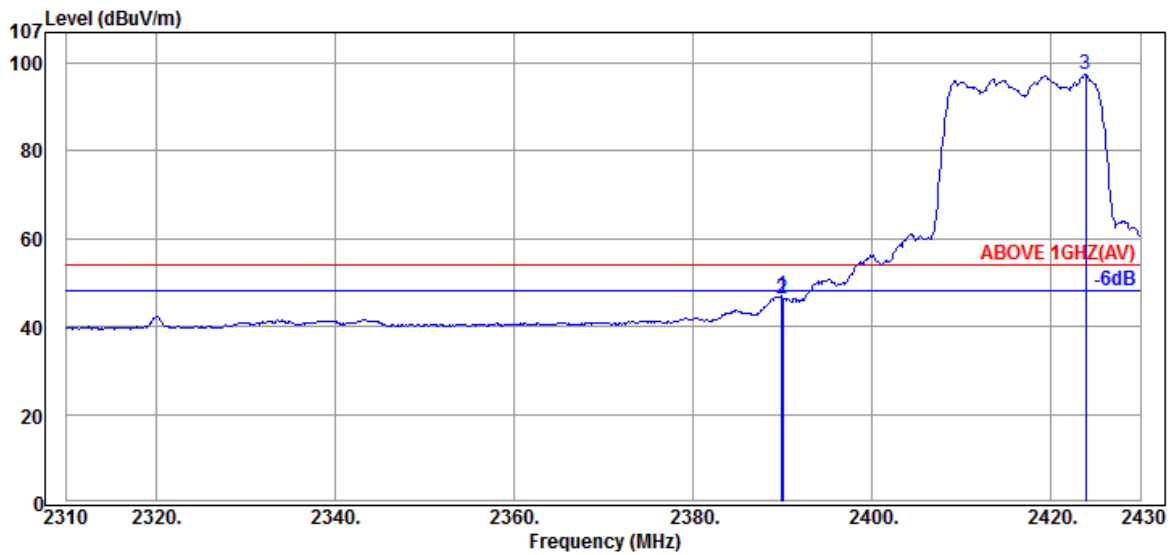


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.92	32.16	6.57	8.18	46.91	54.00	7.09	Average
2390.04	32.16	6.57	7.47	46.20	54.00	7.80	Average
@ 2423.88	32.20	6.61	58.55	97.36	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

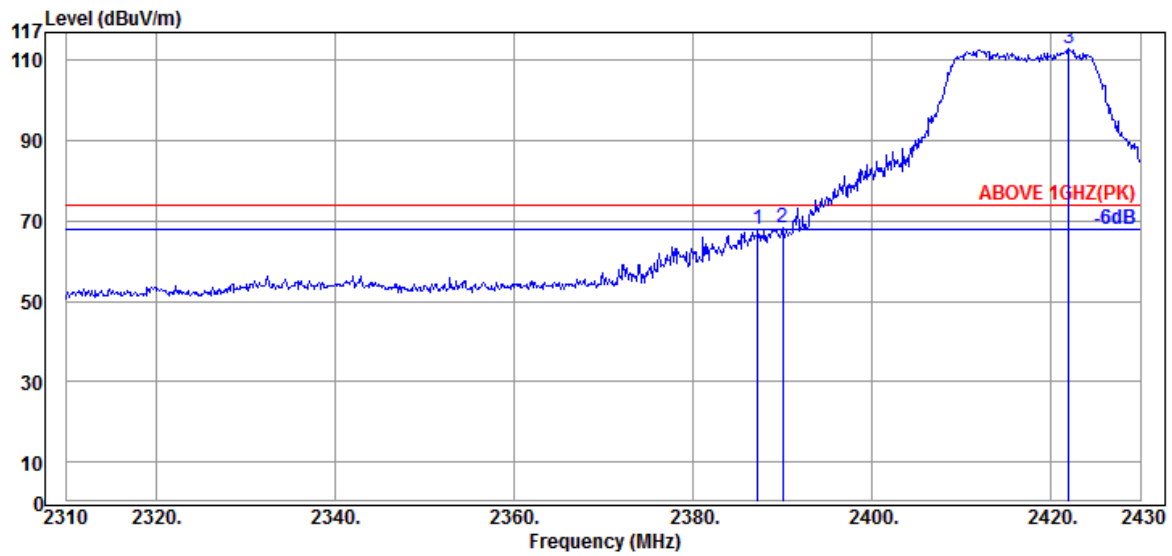

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.28	32.16	6.57	29.29	68.02	74.00	5.98	Peak
2390.04	32.16	6.57	29.43	68.16	74.00	5.84	Peak
@ 2421.96	32.20	6.61	74.01	112.82	---	---	Peak

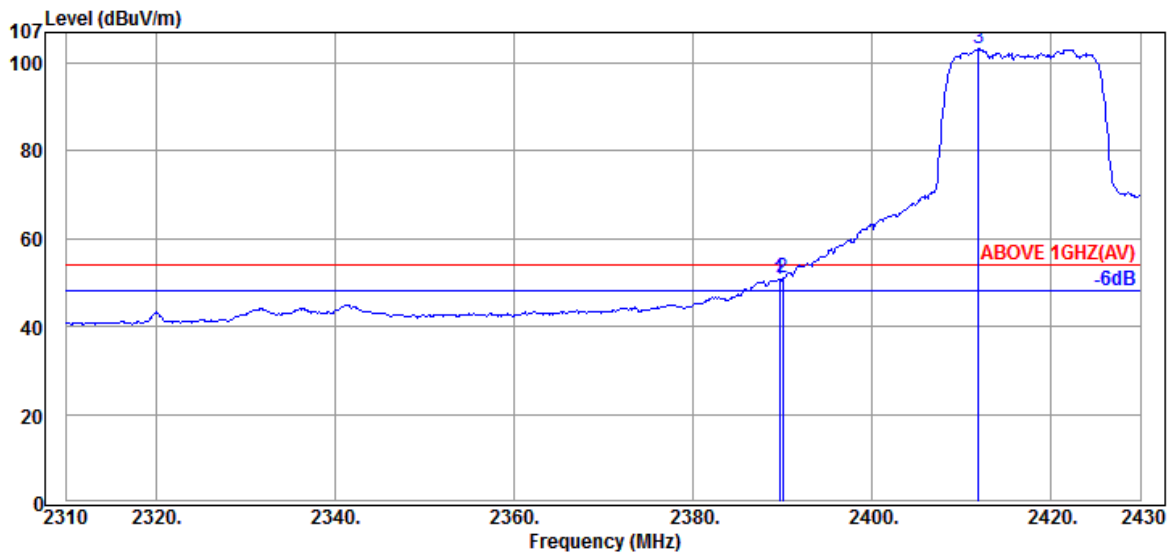


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.68	32.16	6.57	12.06	50.79	54.00	3.21	Average
2390.04	32.16	6.57	12.35	51.08	54.00	2.92	Average
@ 2411.88	32.18	6.59	64.38	103.15	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

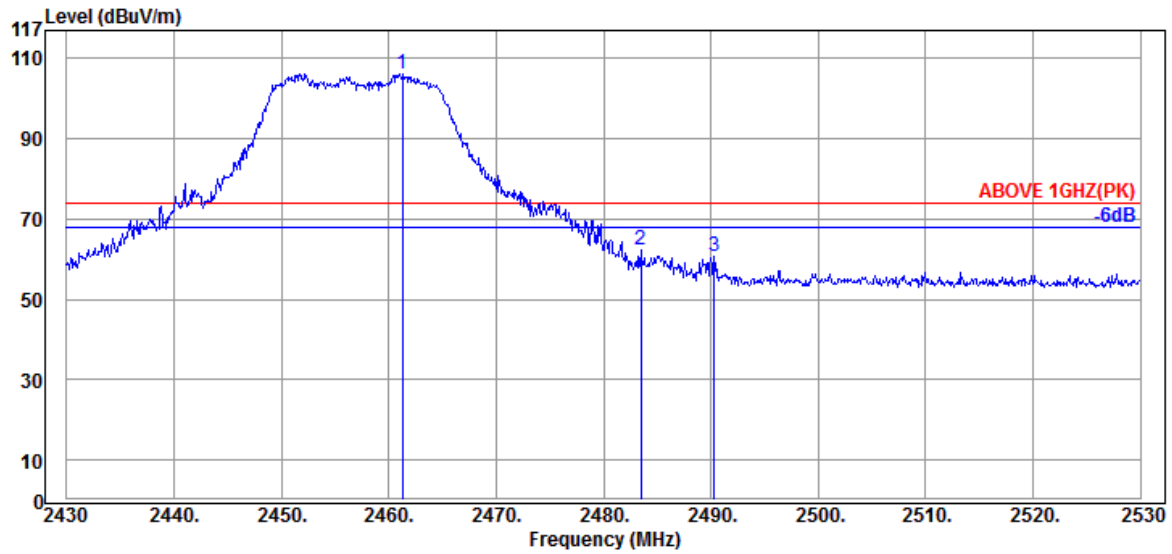

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.30	32.25	6.65	67.42	106.32	---	---	Peak
	2483.50	32.28	6.67	23.44	62.39	74.00	11.61	Peak
	2490.30	32.30	6.69	21.77	60.76	74.00	13.24	Peak

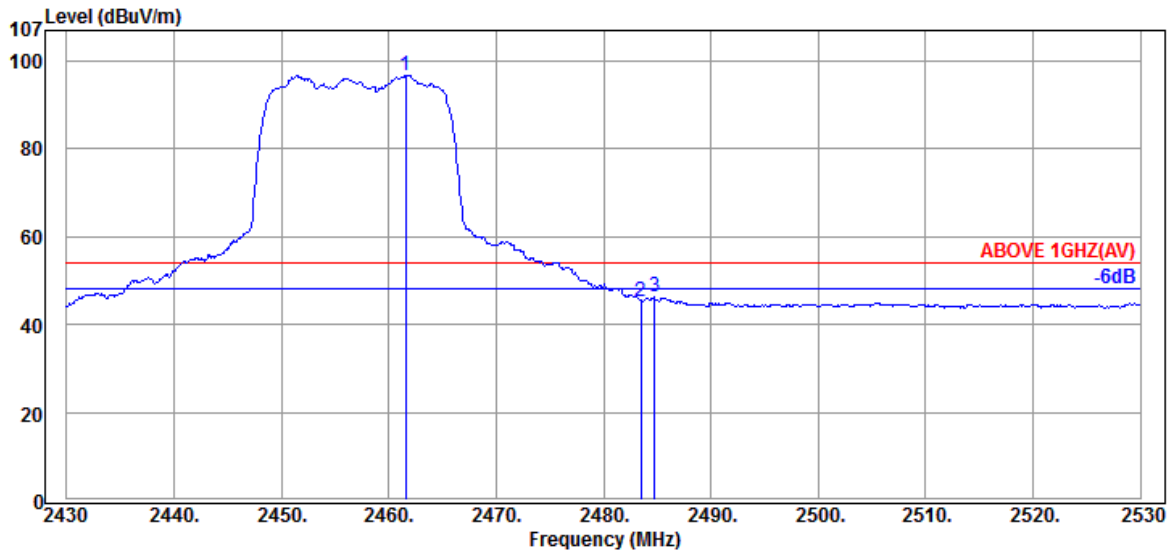


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.60	32.25	6.65	57.96	96.86	---	---	Average
	2483.50	32.28	6.67	6.44	45.39	54.00	8.61	Average
	2484.80	32.28	6.67	7.21	46.16	54.00	7.84	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

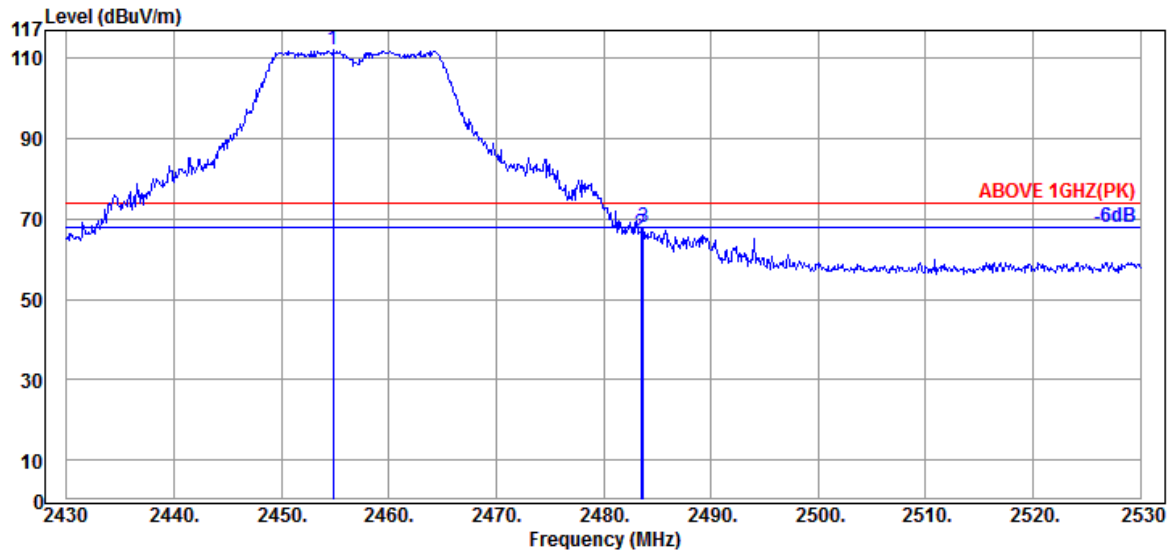

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2454.80	32.25	6.65	73.17	112.07	---	---	Peak
	2483.50	32.28	6.67	27.43	66.38	74.00	7.62	Peak
	2483.70	32.28	6.67	28.88	67.83	74.00	6.17	Peak

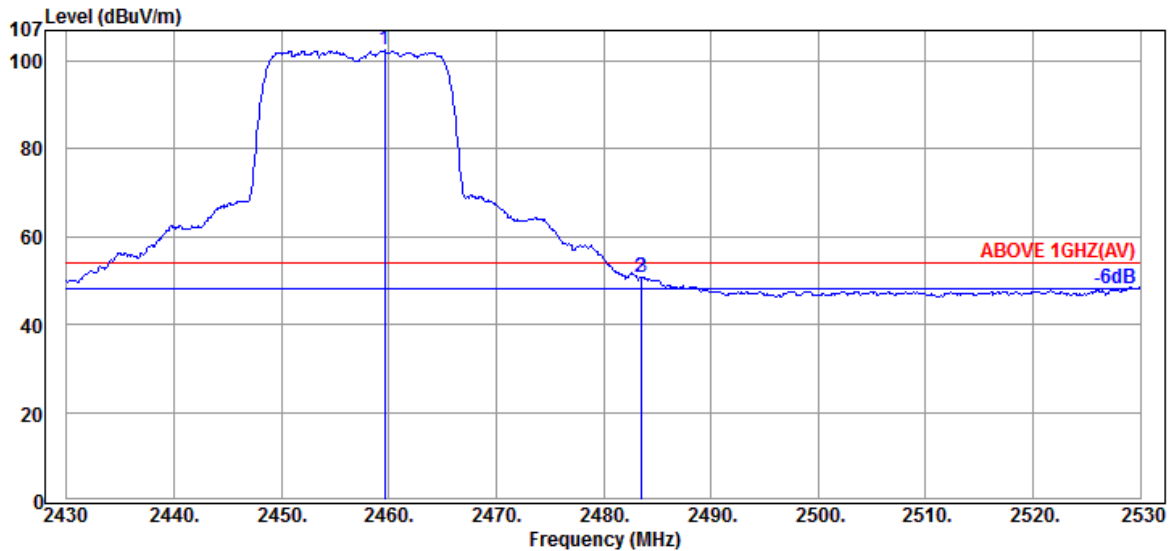


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2459.60	32.25	6.65	63.51	102.41	---	---	Average
	2483.50	32.28	6.67	11.65	50.60	54.00	3.40	Average
	2483.60	32.28	6.67	11.91	50.86	54.00	3.14	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

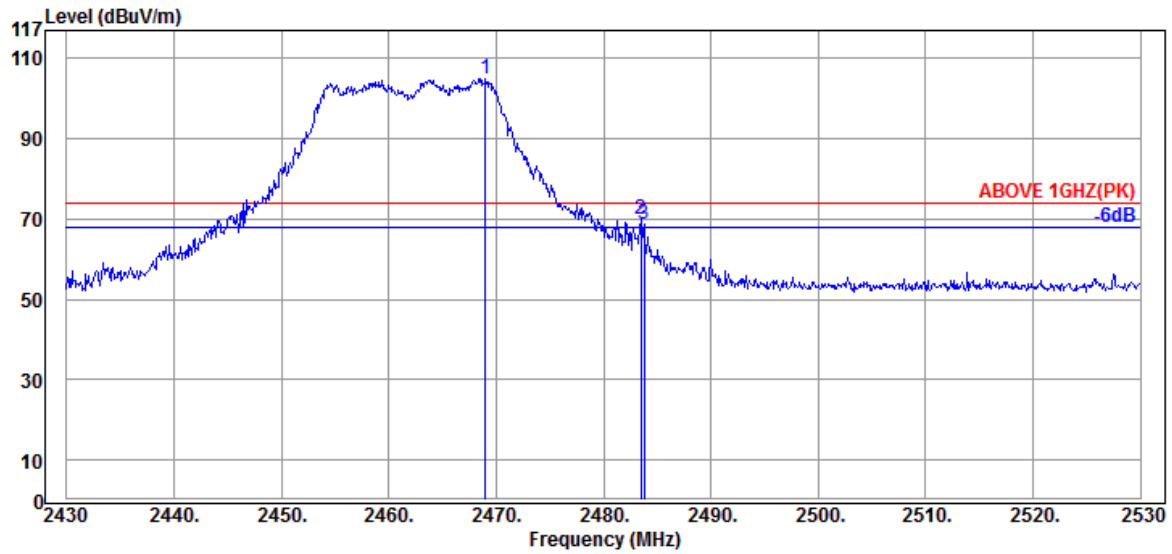

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.00	32.25	6.65	65.99	104.89	---	---	Peak
	2483.50	32.28	6.67	31.00	69.95	74.00	4.05	Peak
	2483.80	32.28	6.67	29.61	68.56	74.00	5.44	Peak

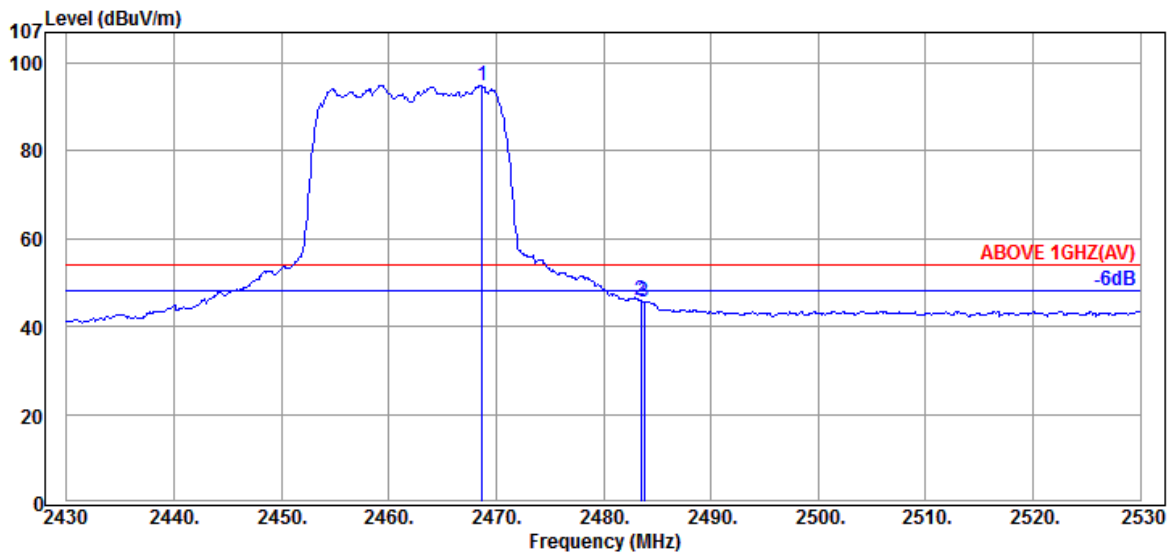


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.70	32.25	6.65	56.15	95.05	---	---	Average
	2483.50	32.28	6.67	7.06	46.01	54.00	7.99	Average
	2483.80	32.28	6.67	6.77	45.72	54.00	8.28	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

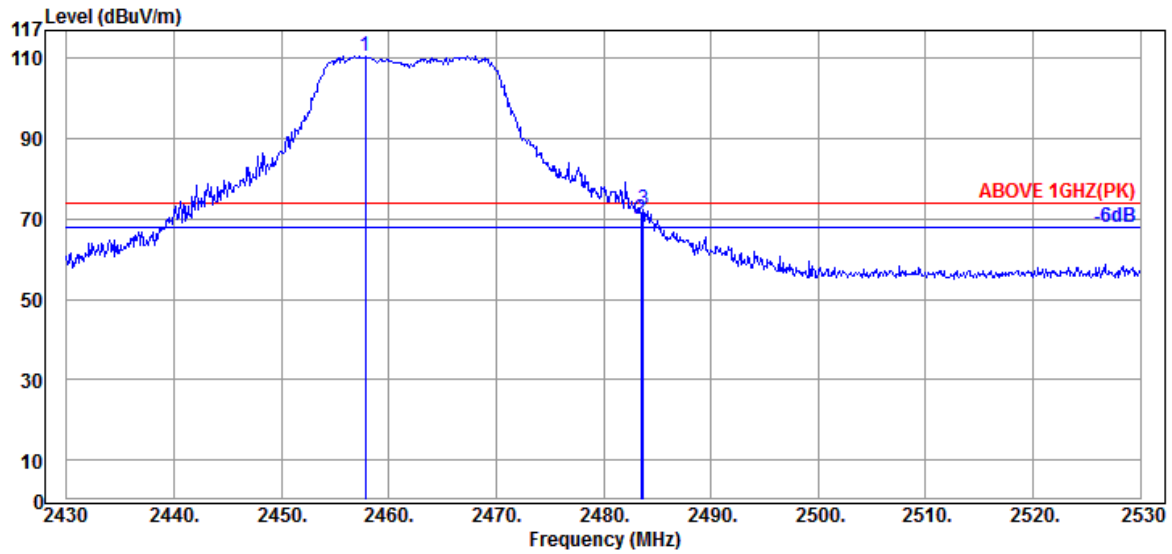

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2457.80	32.25	6.65	71.78	110.68	---	---	Peak
	2483.50	32.28	6.67	31.02	69.97	74.00	4.03	Peak
	2483.70	32.28	6.67	33.30	72.25	74.00	1.75	Peak

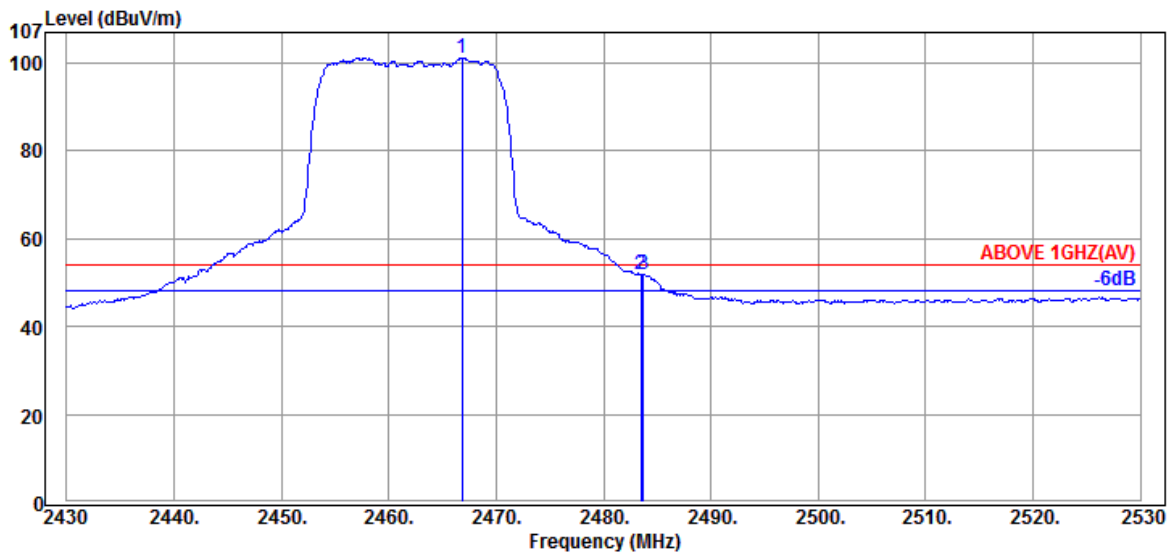


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.80	32.25	6.65	62.26	101.16	---	---	Average
	2483.50	32.28	6.67	12.99	51.94	54.00	2.06	Average
	2483.70	32.28	6.67	12.97	51.92	54.00	2.08	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

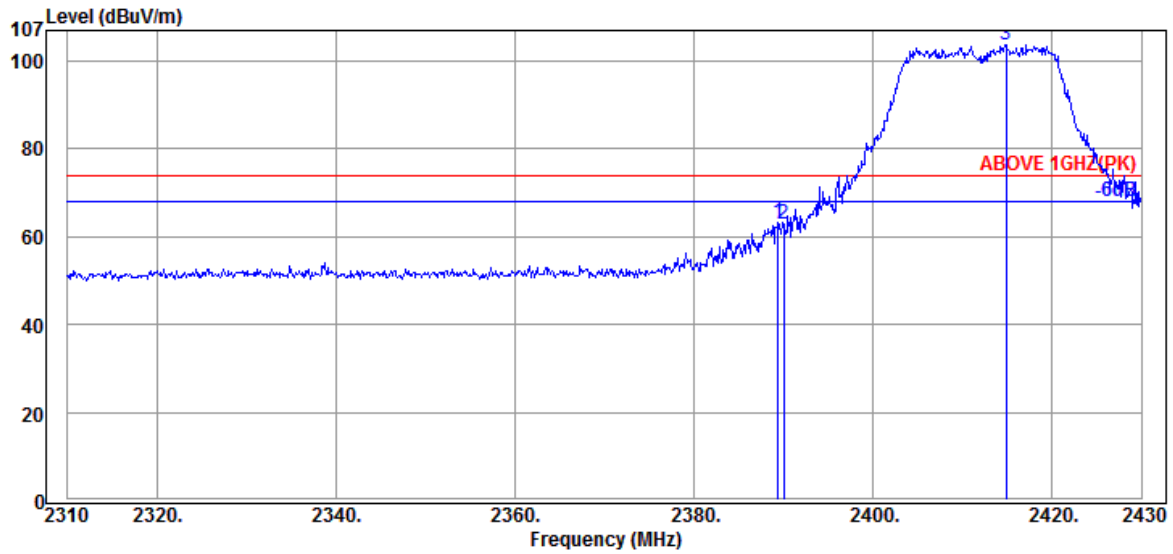

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.44	32.16	6.57	24.64	63.37	74.00	10.63	Peak
2390.04	32.16	6.57	24.22	62.95	74.00	11.05	Peak
@ 2414.88	32.18	6.59	64.93	103.70	---	---	Peak

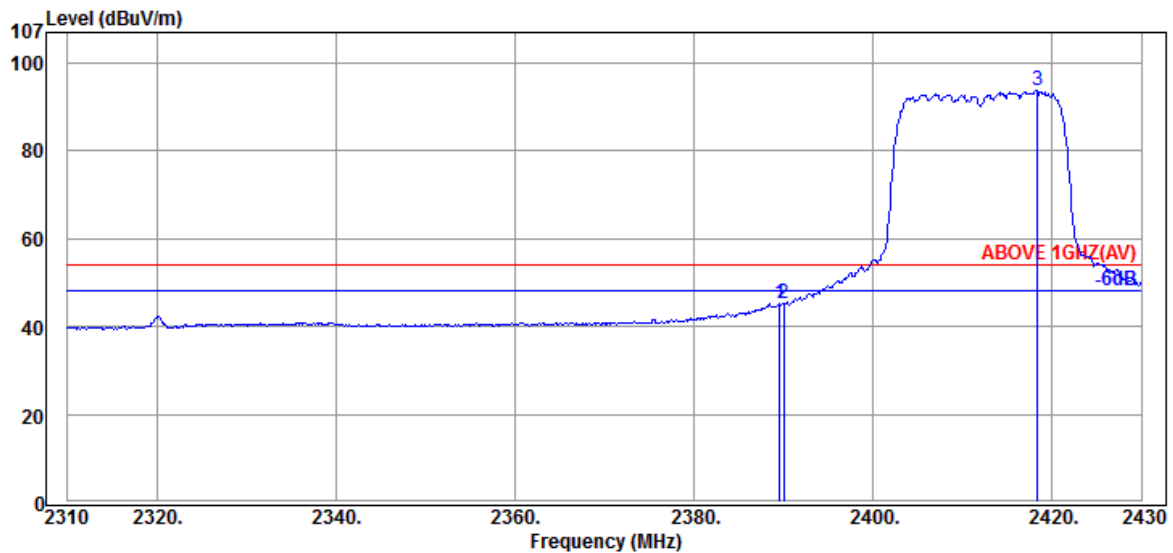


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	32.16	6.57	6.33	45.06	54.00	8.94	Average
2390.04	32.16	6.57	6.49	45.22	54.00	8.78	Average
@ 2418.36	32.18	6.59	54.96	93.73	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

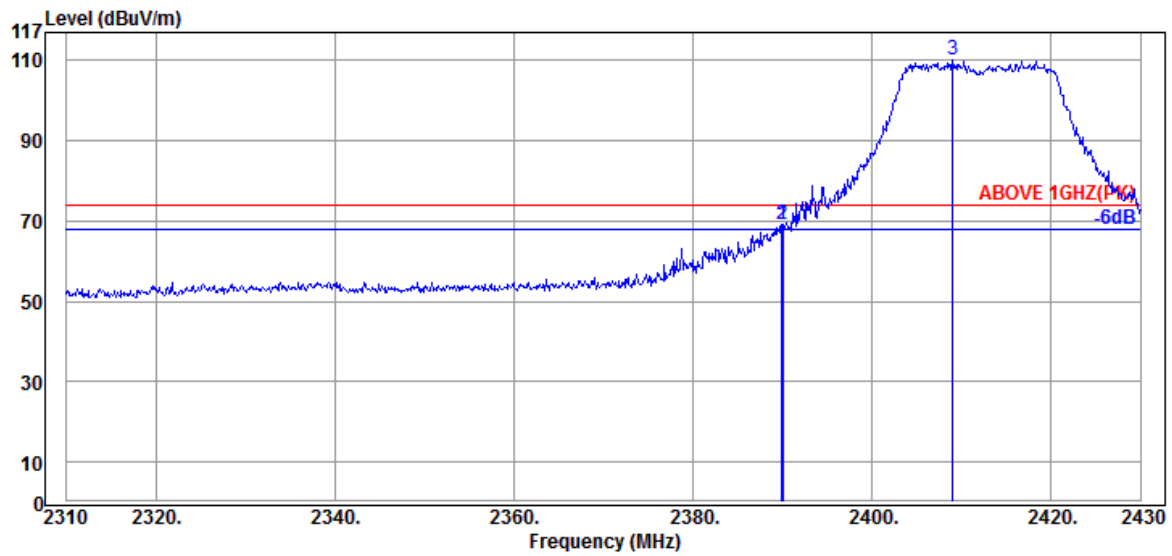

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.92	32.16	6.57	30.45	69.18	74.00	4.82	Peak
2390.04	32.16	6.57	30.37	69.10	74.00	4.90	Peak
@ 2409.00	32.18	6.59	71.54	110.31	---	---	Peak

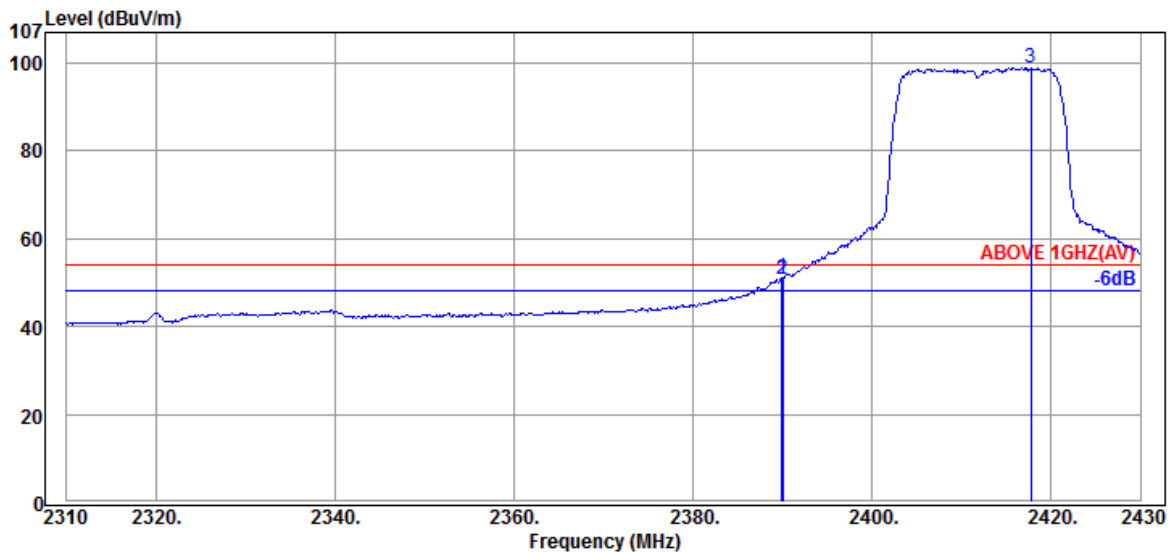


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.92	32.16	6.57	12.21	50.94	54.00	3.06	Average
2390.04	32.16	6.57	11.96	50.69	54.00	3.31	Average
@ 2417.76	32.18	6.59	60.26	99.03	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

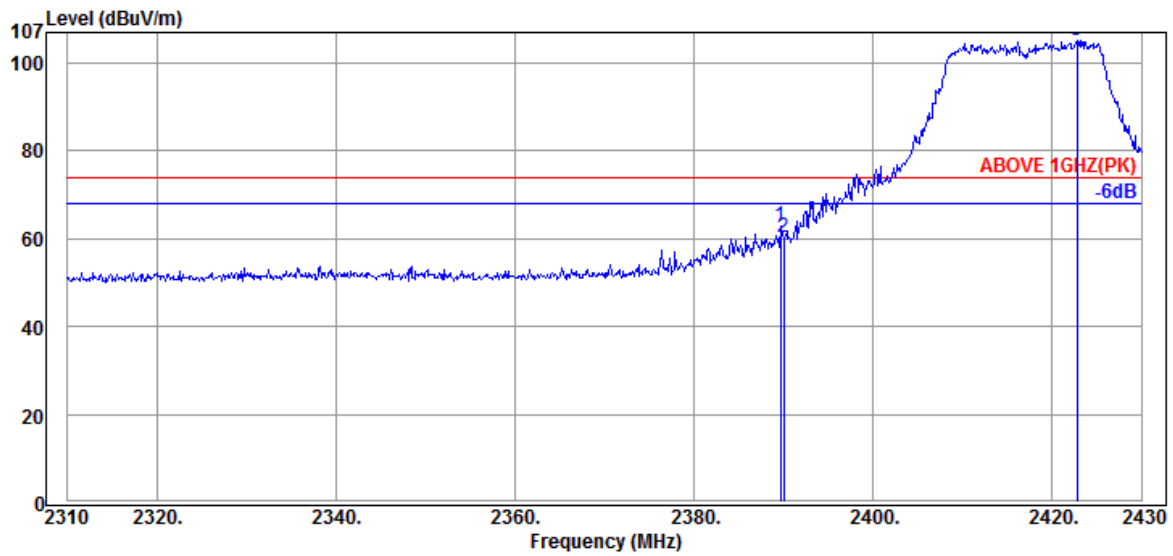

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.68	32.16	6.57	24.00	62.73	74.00	11.27	Peak
2390.04	32.16	6.57	21.46	60.19	74.00	13.81	Peak
@ 2422.80	32.20	6.61	66.38	105.19	---	---	Peak

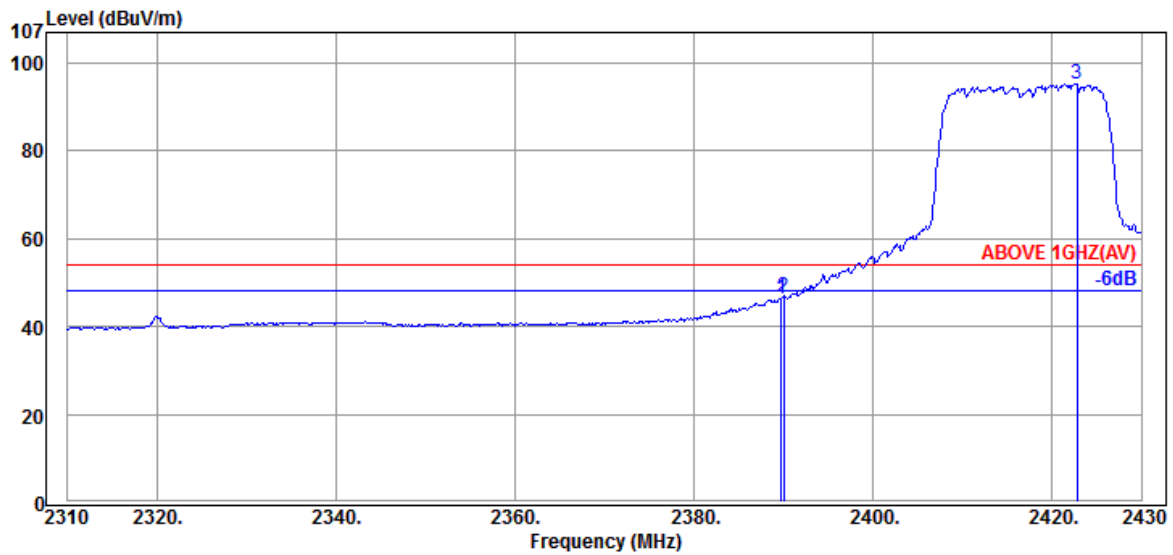


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.80	32.16	6.57	7.74	46.47	54.00	7.53	Average
2390.04	32.16	6.57	8.12	46.85	54.00	7.15	Average
@ 2422.80	32.20	6.61	56.35	95.16	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

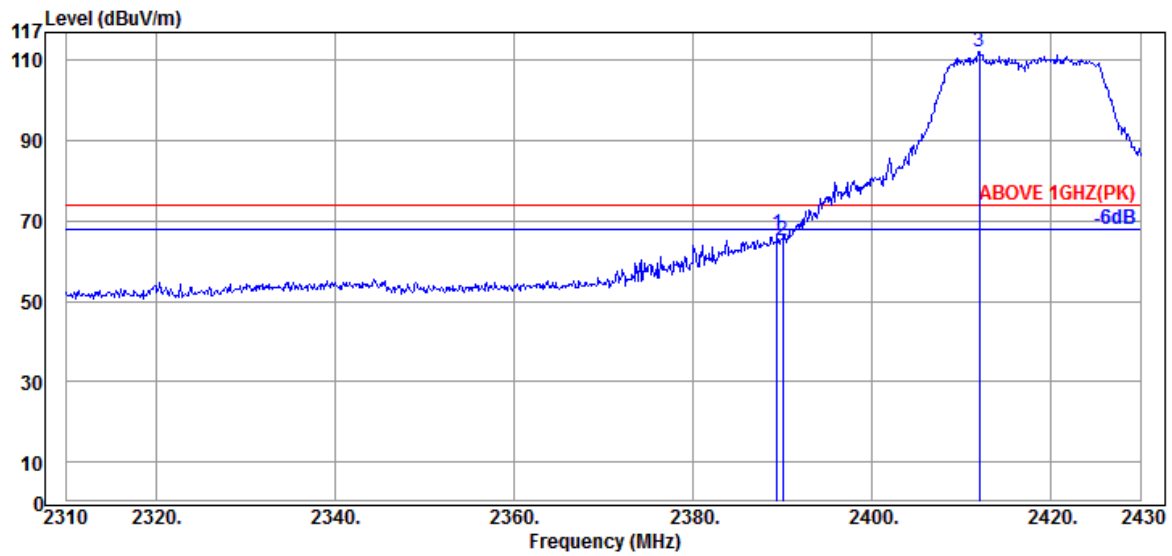

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.44	32.16	6.57	27.92	66.65	74.00	7.35	Peak
2390.04	32.16	6.57	26.45	65.18	74.00	8.82	Peak
@ 2412.00	32.18	6.59	73.43	112.20	---	---	Peak

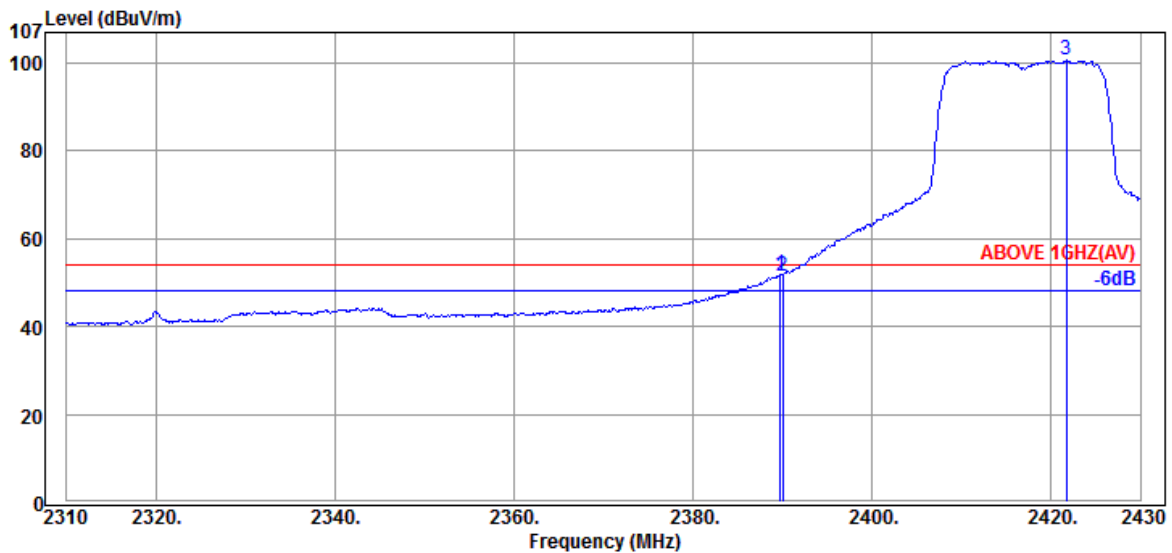


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.80	32.16	6.57	13.03	51.76	54.00	2.24	Average
2390.04	32.16	6.57	12.91	51.64	54.00	2.36	Average
@ 2421.72	32.20	6.61	61.93	100.74	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

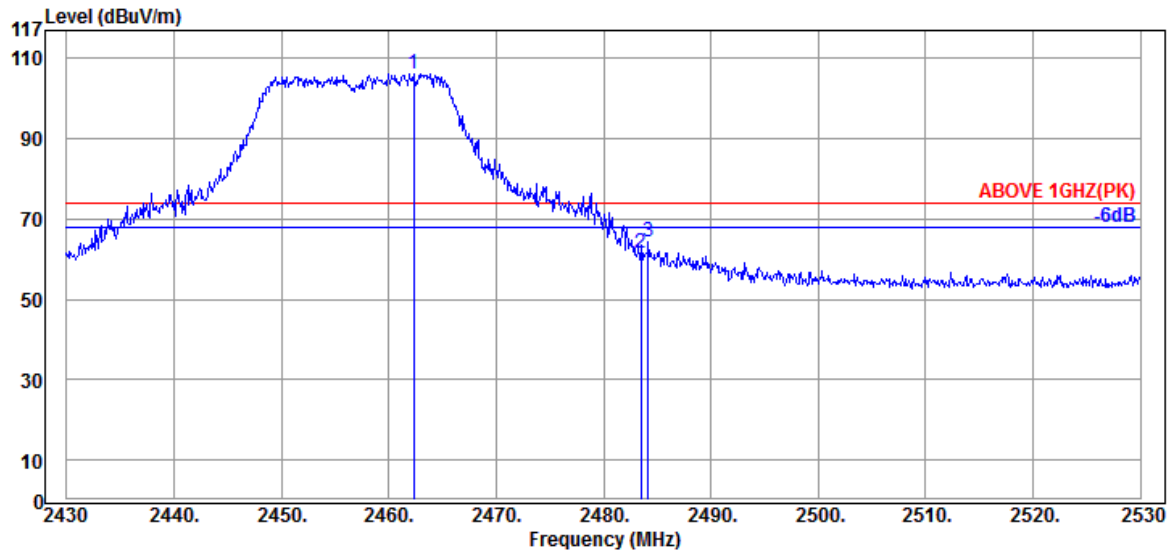

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.30	32.25	6.65	67.34	106.24	---	---	Peak
	2483.50	32.28	6.67	22.55	61.50	74.00	12.50	Peak
	2484.20	32.28	6.67	25.26	64.21	74.00	9.79	Peak

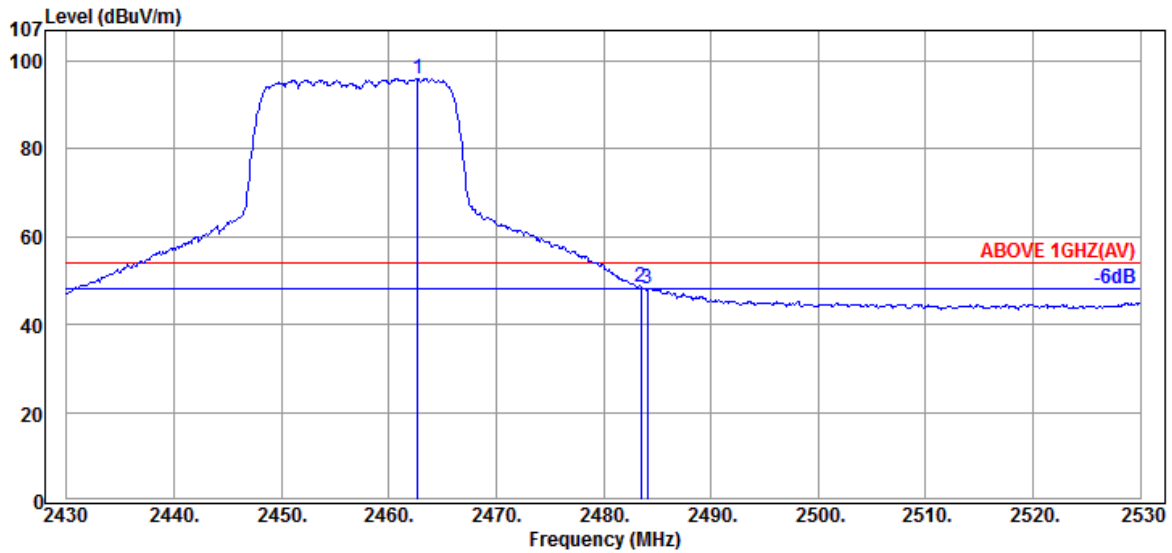


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.70	32.25	6.65	57.15	96.05	---	---	Average
	2483.50	32.28	6.67	9.69	48.64	54.00	5.36	Average
	2484.10	32.28	6.67	9.34	48.29	54.00	5.71	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

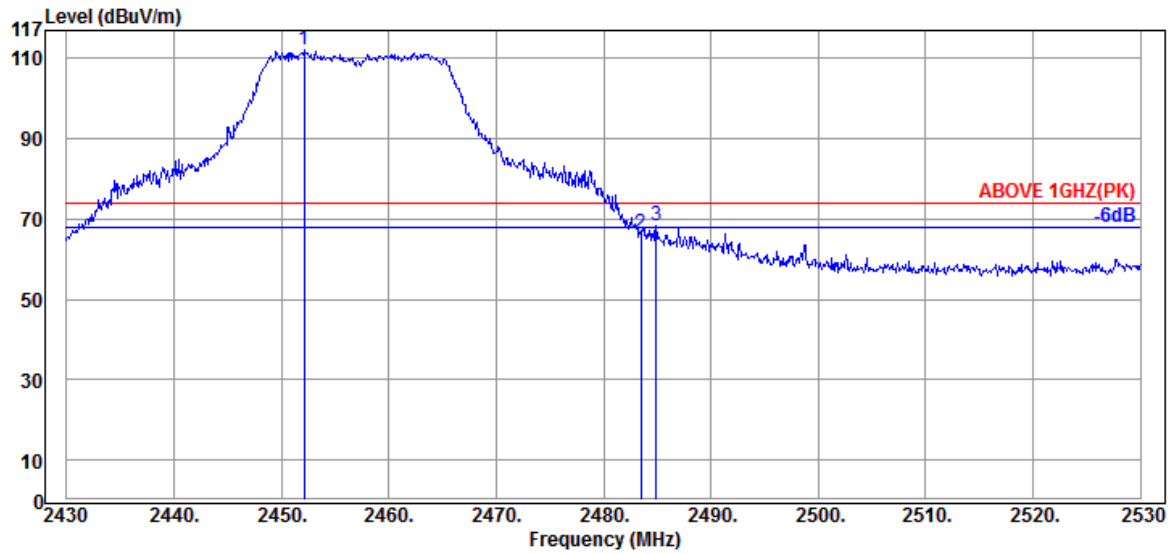

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2452.10	32.23	6.63	73.16	112.02	---	---	Peak
	2483.50	32.28	6.67	27.28	66.23	74.00	7.77	Peak
	2484.90	32.28	6.67	29.32	68.27	74.00	5.73	Peak

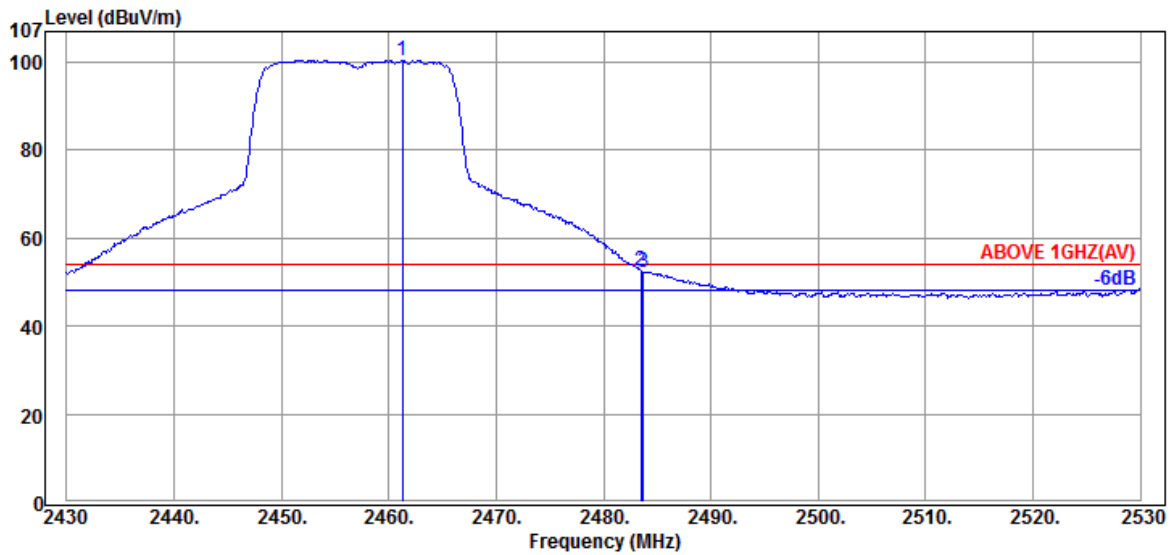


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.30	32.25	6.65	61.59	100.49	---	---	Average
	2483.50	32.28	6.67	13.66	52.61	54.00	1.39	Average
	2483.70	32.28	6.67	13.44	52.39	54.00	1.61	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

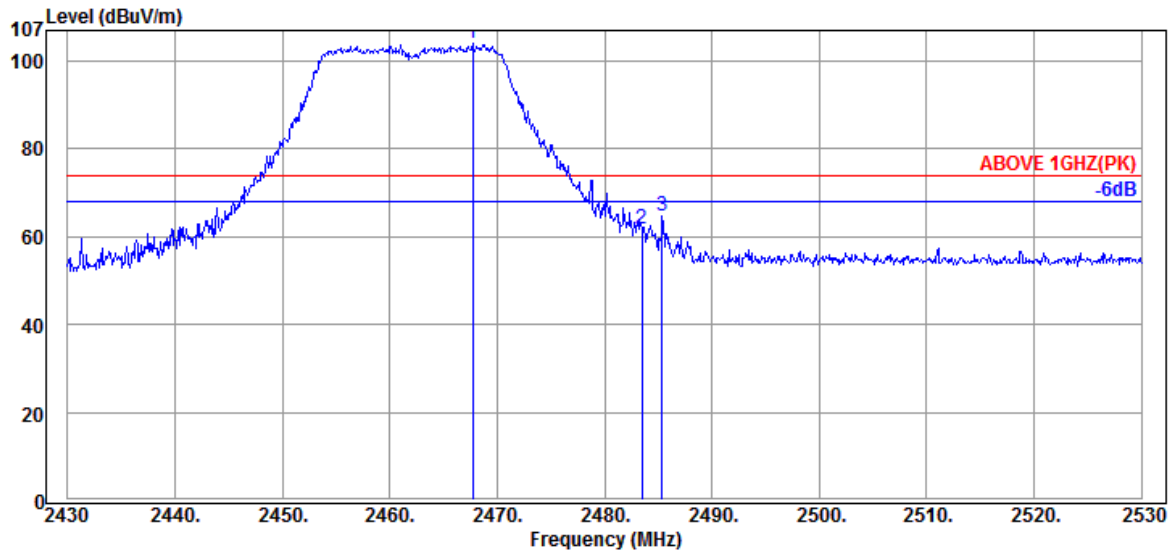

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2467.70	32.25	6.65	65.19	104.09	---	---	Peak
	2483.50	32.28	6.67	22.84	61.79	74.00	12.21	Peak
	2485.40	32.28	6.67	25.81	64.76	74.00	9.24	Peak

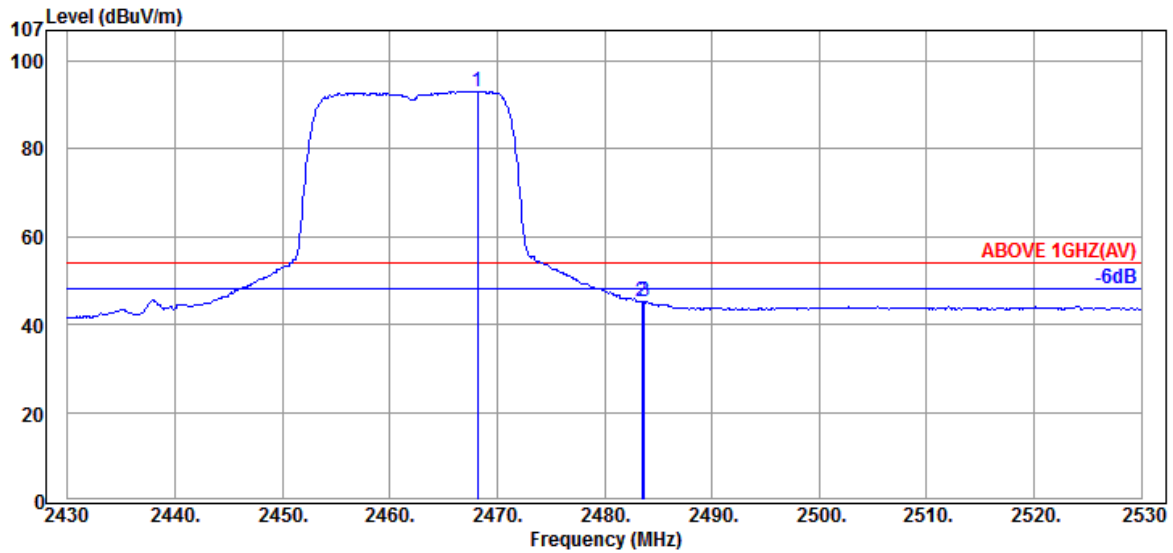


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.20	32.25	6.65	54.26	93.16	---	---	Average
	2483.50	32.28	6.67	6.33	45.28	54.00	8.72	Average
	2483.70	32.28	6.67	6.24	45.19	54.00	8.81	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

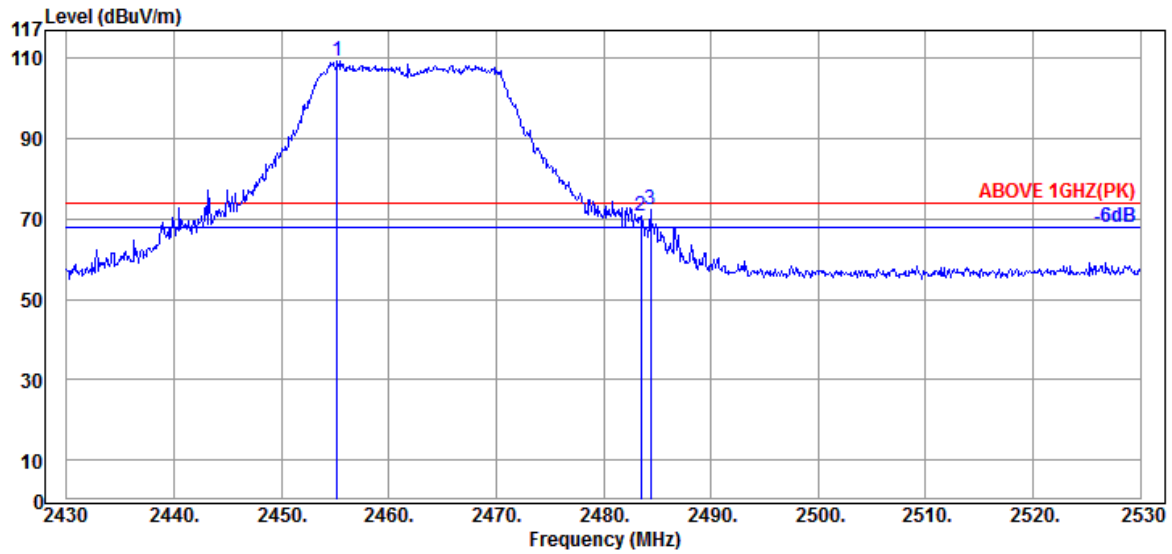

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.20	32.25	6.65	70.42	109.32	---	---	Peak
	2483.50	32.28	6.67	31.82	70.77	74.00	3.23	Peak
	2484.40	32.28	6.67	33.34	72.29	74.00	1.71	Peak

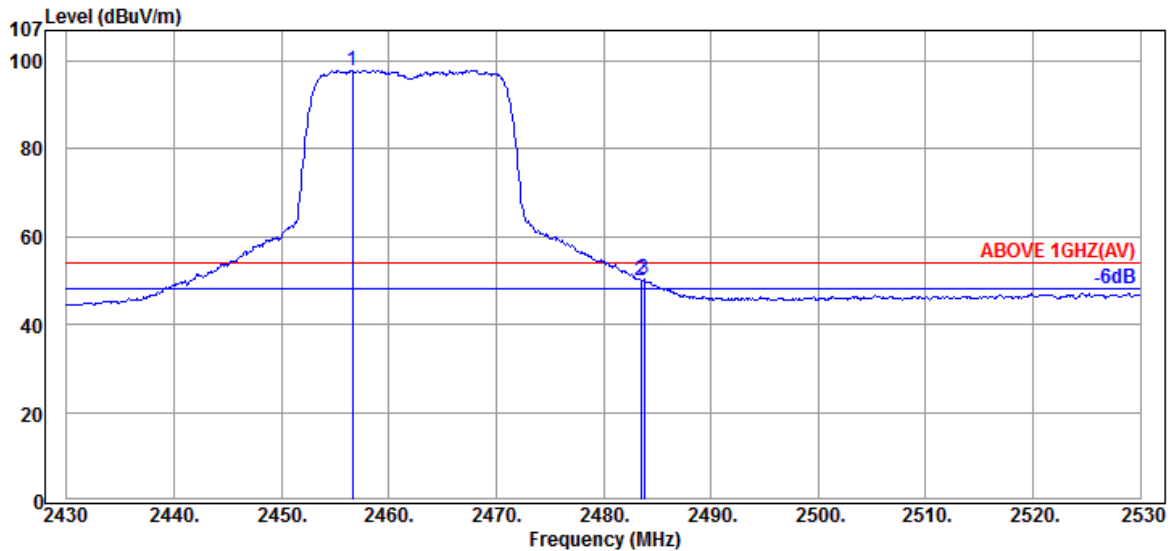


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.60	32.25	6.65	59.05	97.95	---	---	Average
	2483.50	32.28	6.67	11.22	50.17	54.00	3.83	Average
	2483.80	32.28	6.67	11.38	50.33	54.00	3.67	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

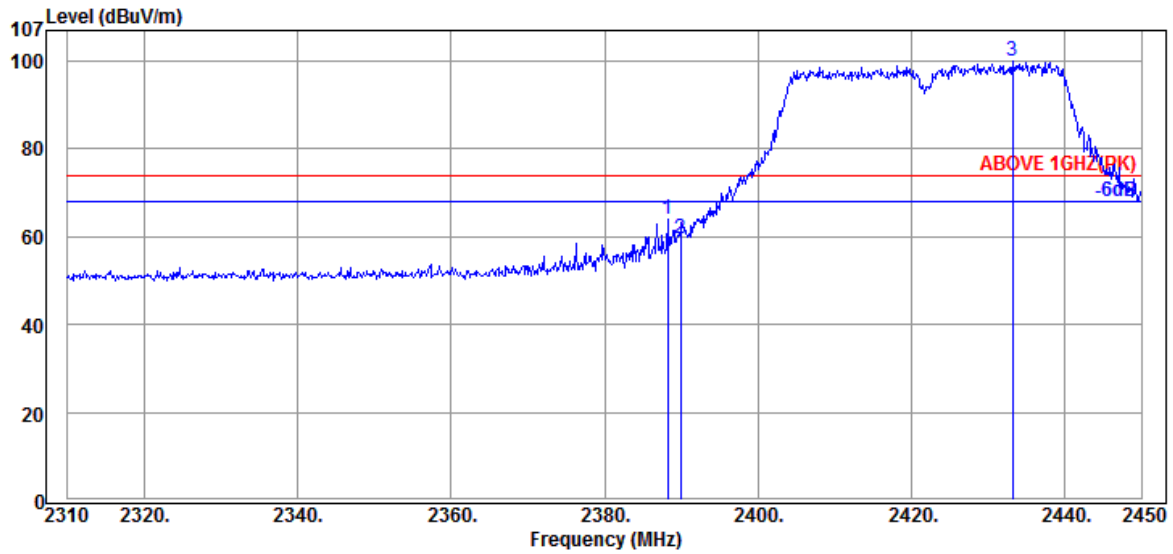

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.26	32.16	6.57	25.23	63.96	74.00	10.04	Peak
2389.94	32.16	6.57	20.98	59.71	74.00	14.29	Peak
@ 2433.20	32.20	6.61	61.23	100.04	---	---	Peak

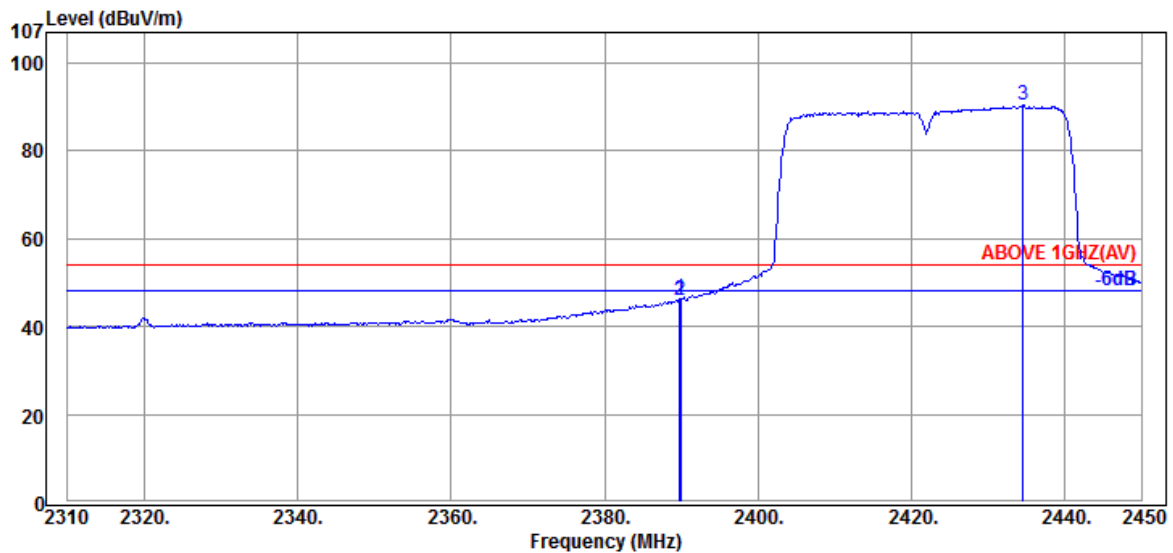


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.80	32.16	6.57	7.47	46.20	54.00	7.80	Average
2389.94	32.16	6.57	7.34	46.07	54.00	7.93	Average
@ 2434.60	32.20	6.61	51.52	90.33	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

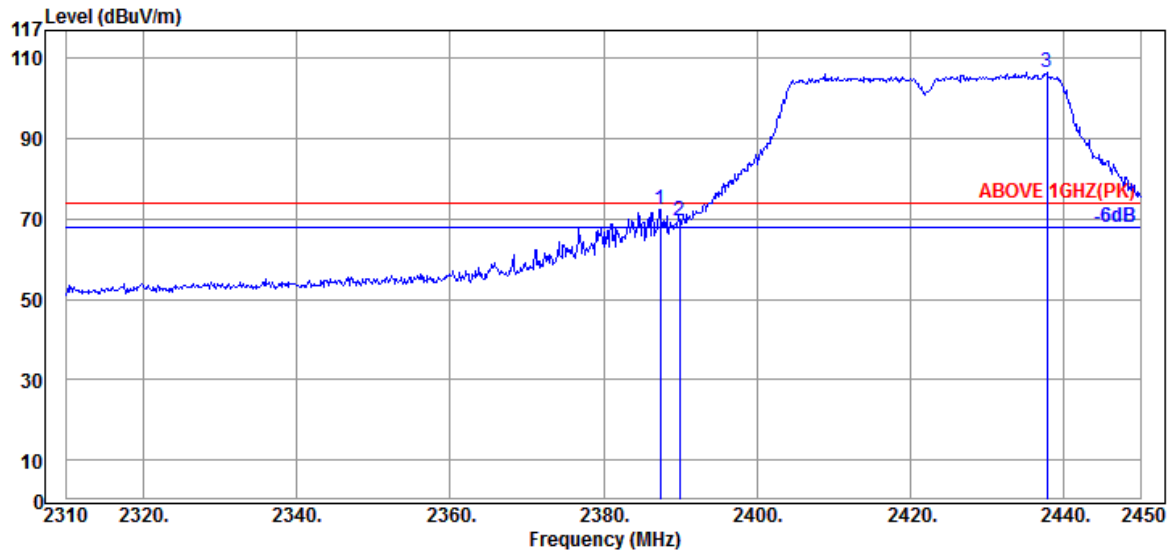

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.42	32.16	6.57	33.55	72.28	74.00	1.72	Peak
2389.94	32.16	6.57	30.85	69.58	74.00	4.42	Peak
@ 2437.82	32.23	6.63	67.64	106.50	---	---	Peak

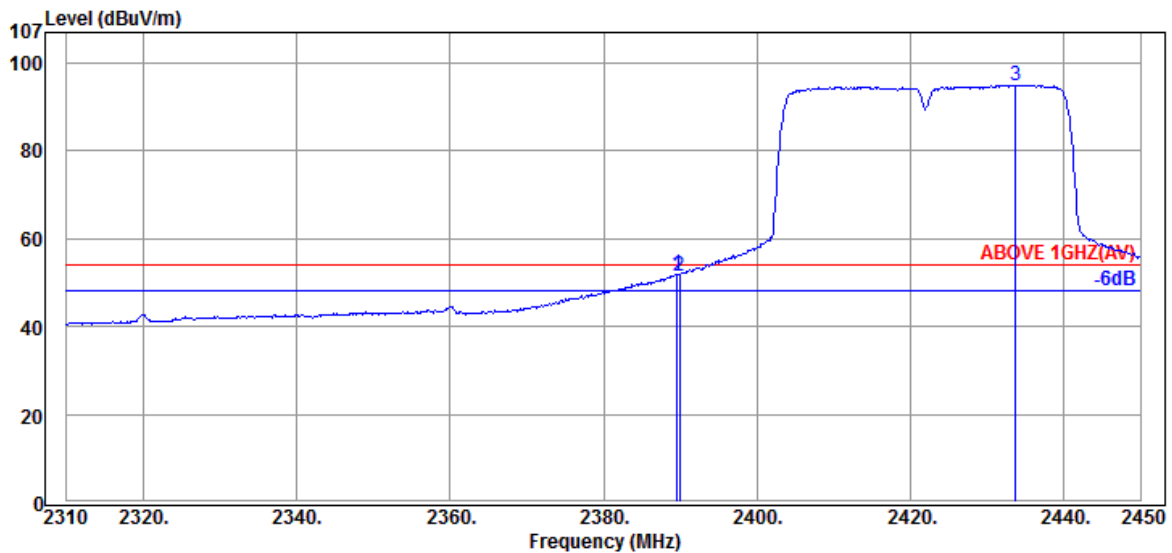


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.66	32.16	6.57	13.07	51.80	54.00	2.20	Average
2389.94	32.16	6.57	12.90	51.63	54.00	2.37	Average
@ 2433.76	32.20	6.61	56.19	95.00	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

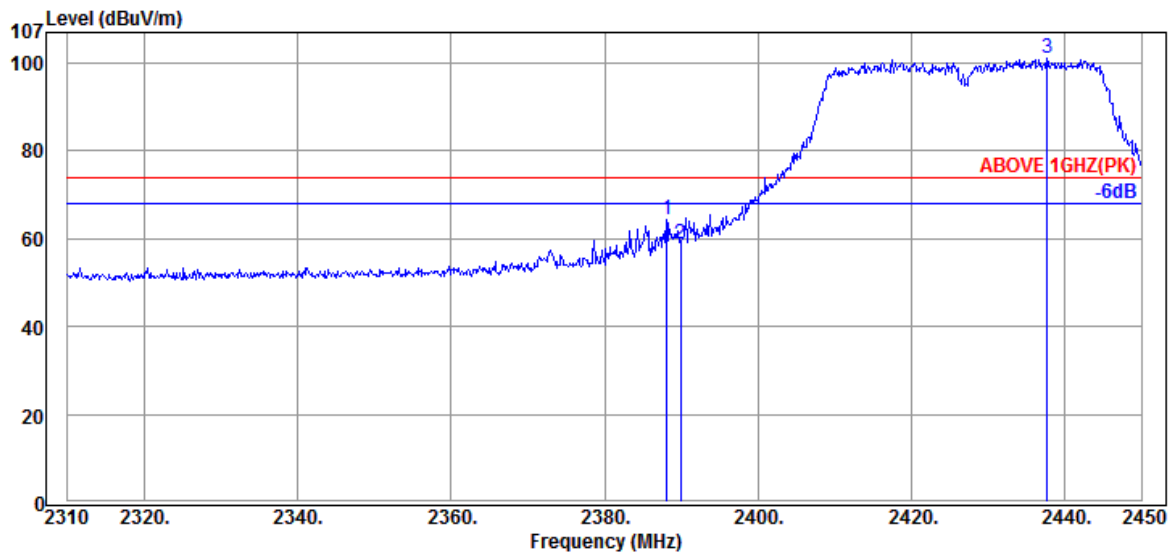

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.12	32.16	6.57	25.63	64.36	74.00	9.64	Peak
2389.94	32.16	6.57	20.18	58.91	74.00	15.09	Peak
@ 2437.68	32.23	6.63	62.10	100.96	---	---	Peak

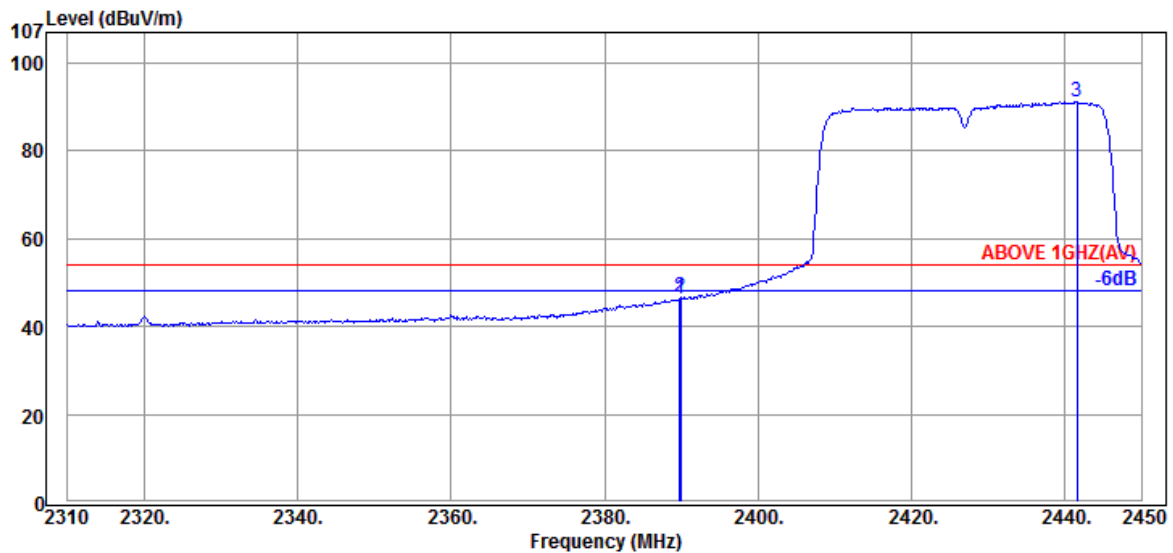


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.80	32.16	6.57	7.61	46.34	54.00	7.66	Average
2389.94	32.16	6.57	7.82	46.55	54.00	7.45	Average
@ 2441.60	32.23	6.63	52.30	91.16	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

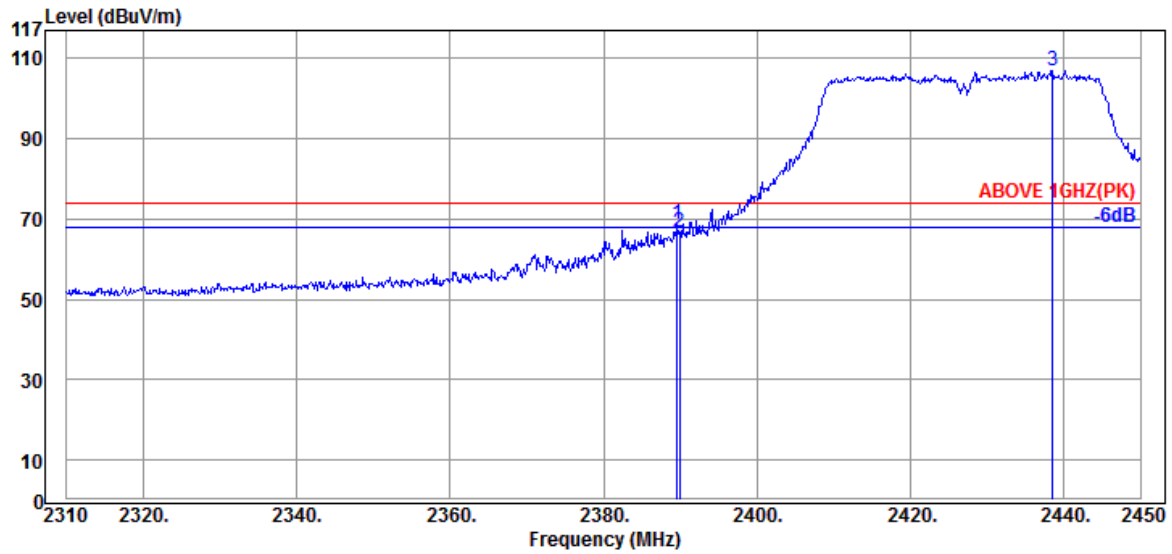

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.66	32.16	6.57	30.20	68.93	74.00	5.07	Peak
2389.94	32.16	6.57	28.14	66.87	74.00	7.13	Peak
@ 2438.52	32.23	6.63	68.16	107.02	---	---	Peak

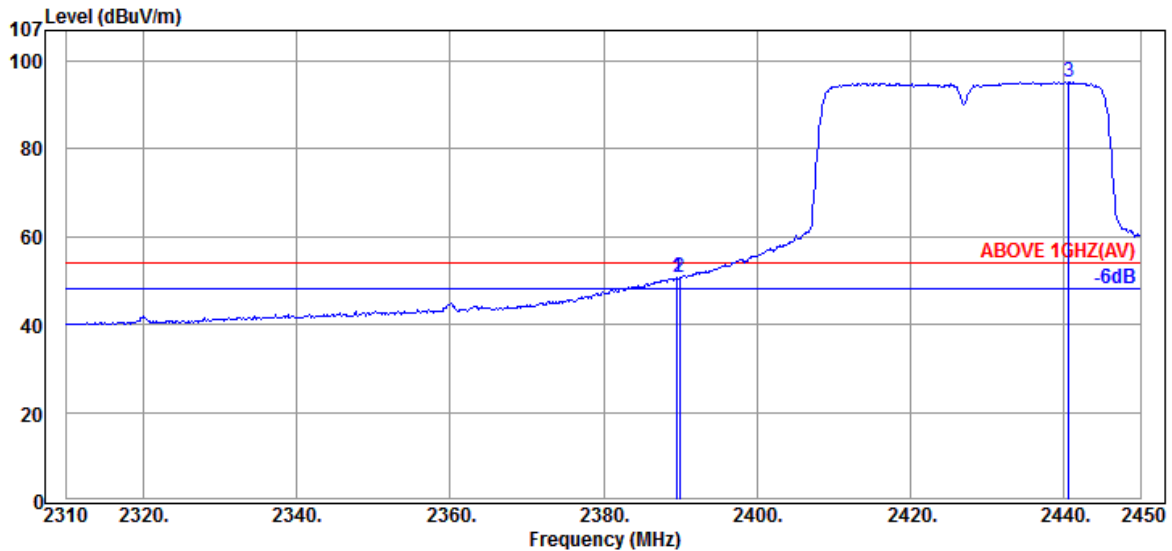


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.66	32.16	6.57	11.99	50.72	54.00	3.28	Average
2389.94	32.16	6.57	11.85	50.58	54.00	3.42	Average
@ 2440.62	32.23	6.63	56.38	95.24	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

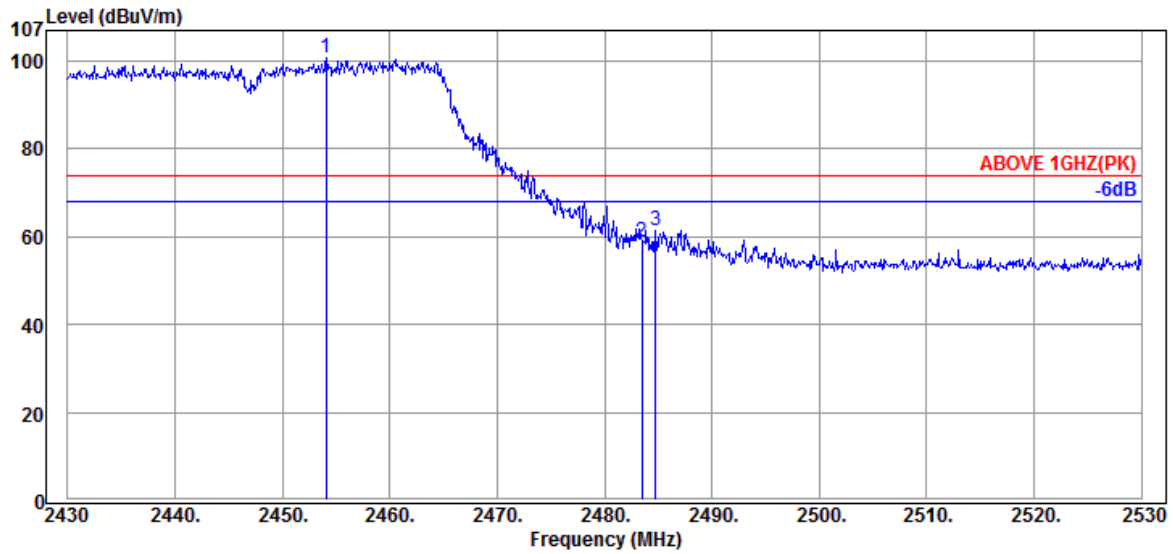

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2454.10	32.25	6.65	61.76	100.66	---	---	Peak
	2483.50	32.28	6.67	19.90	58.85	74.00	15.15	Peak
	2484.80	32.28	6.67	22.59	61.54	74.00	12.46	Peak

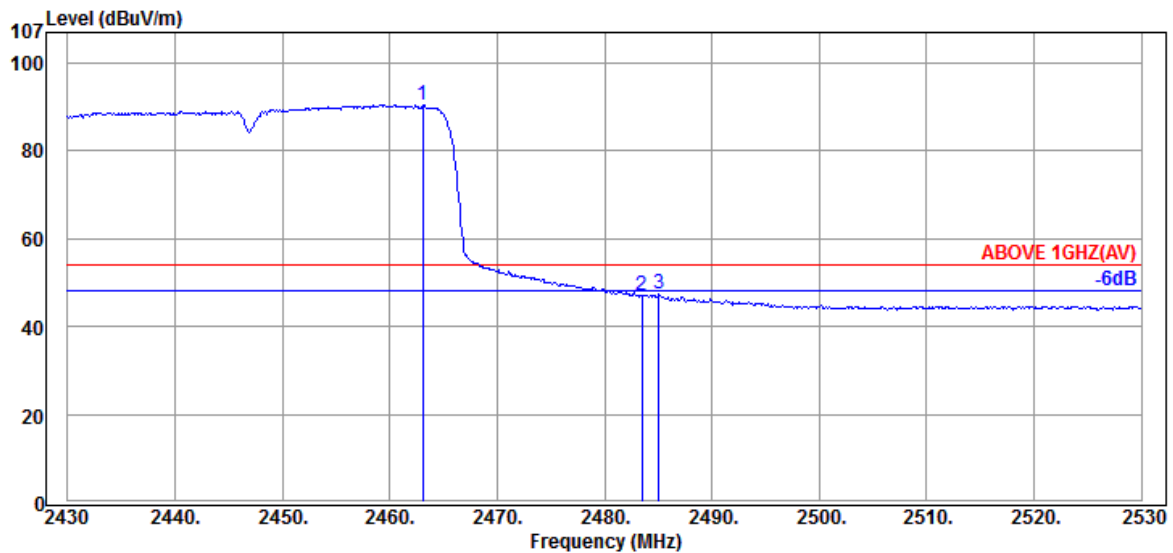


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.10	32.25	6.65	51.63	90.53	---	---	Average
	2483.50	32.28	6.67	8.02	46.97	54.00	7.03	Average
	2485.10	32.28	6.67	8.37	47.32	54.00	6.68	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

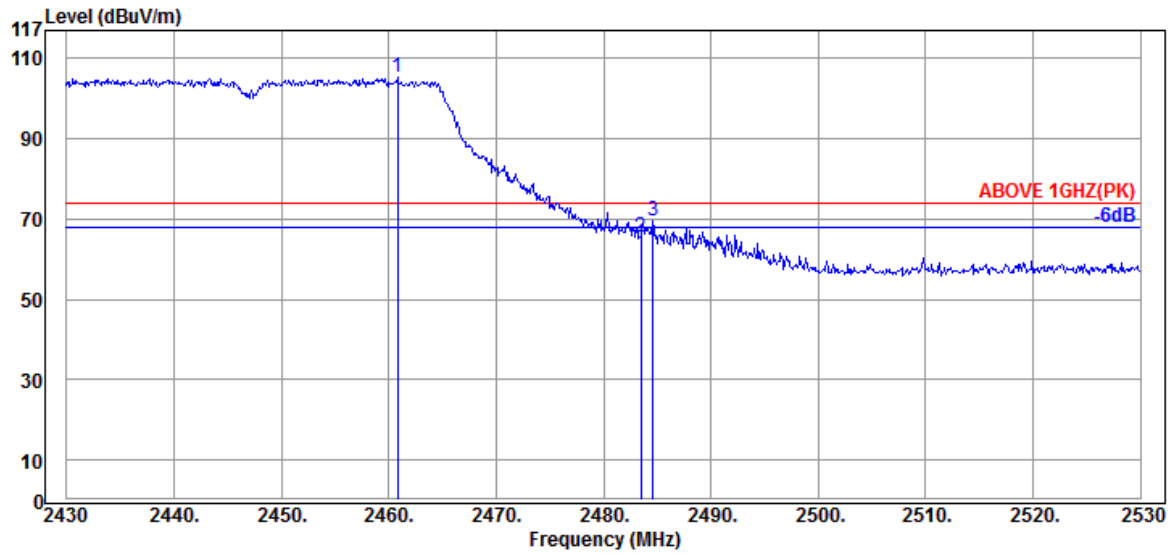

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.80	32.25	6.65	66.49	105.39	---	---	Peak
	2483.50	32.28	6.67	26.58	65.53	74.00	8.47	Peak
	2484.60	32.28	6.67	30.49	69.44	74.00	4.56	Peak

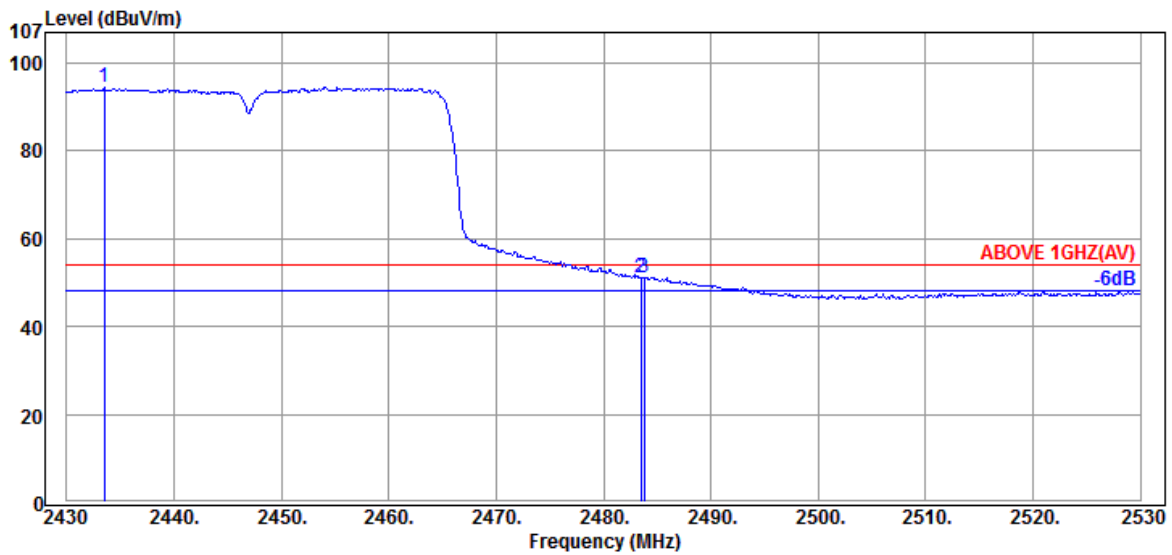


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2433.50	32.20	6.61	55.76	94.57	---	---	Average
	2483.50	32.28	6.67	12.06	51.01	54.00	2.99	Average
	2483.80	32.28	6.67	12.19	51.14	54.00	2.86	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

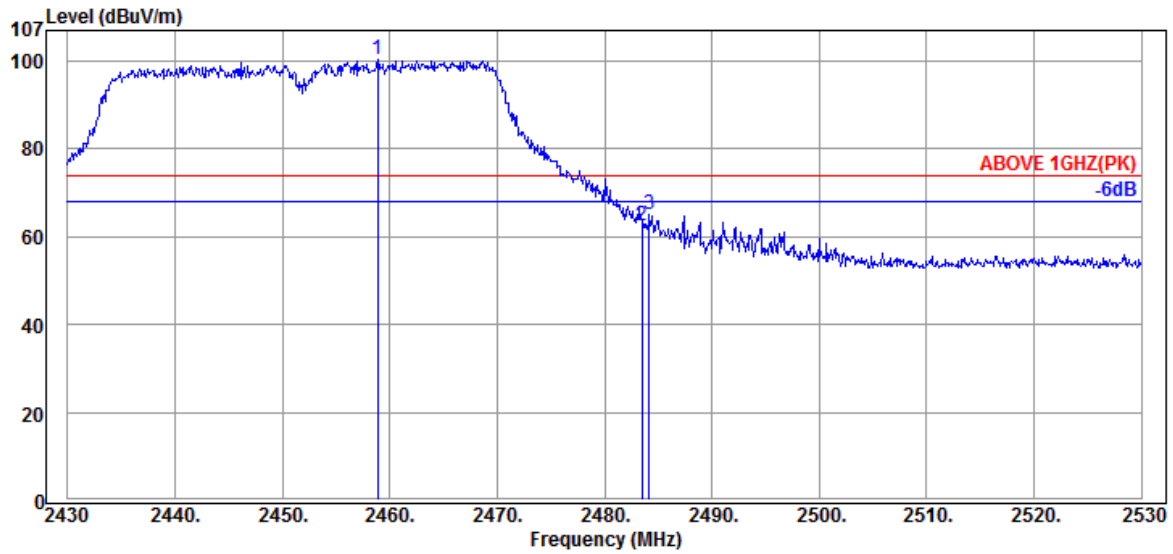

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.90	32.25	6.65	61.33	100.23	---	---	Peak
	2483.50	32.28	6.67	23.41	62.36	74.00	11.64	Peak
	2484.20	32.28	6.67	25.97	64.92	74.00	9.08	Peak

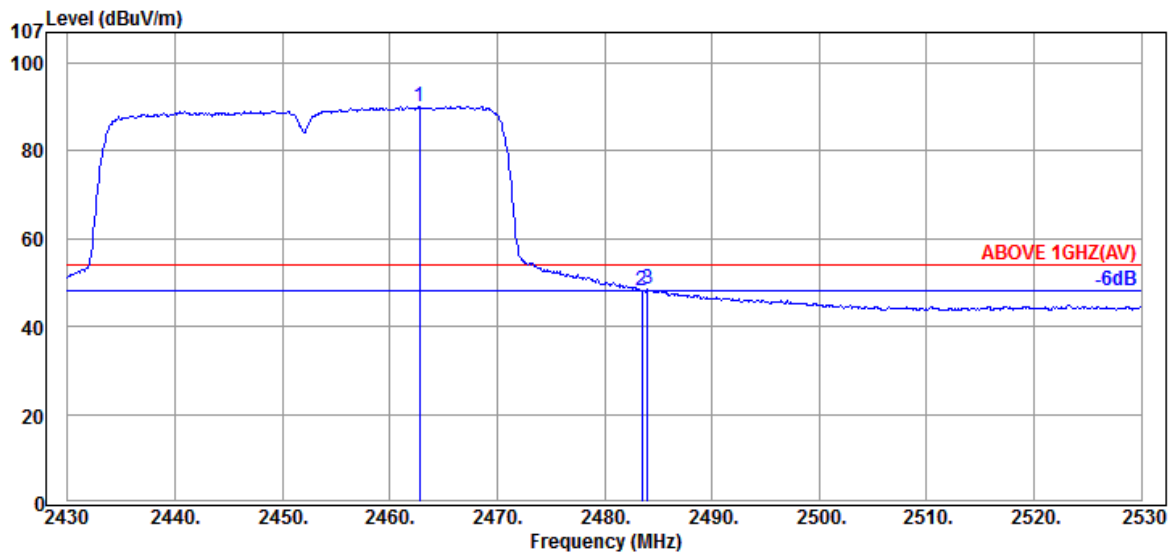


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.80	32.25	6.65	51.30	90.20	---	---	Average
	2483.50	32.28	6.67	9.25	48.20	54.00	5.80	Average
	2484.00	32.28	6.67	9.42	48.37	54.00	5.63	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

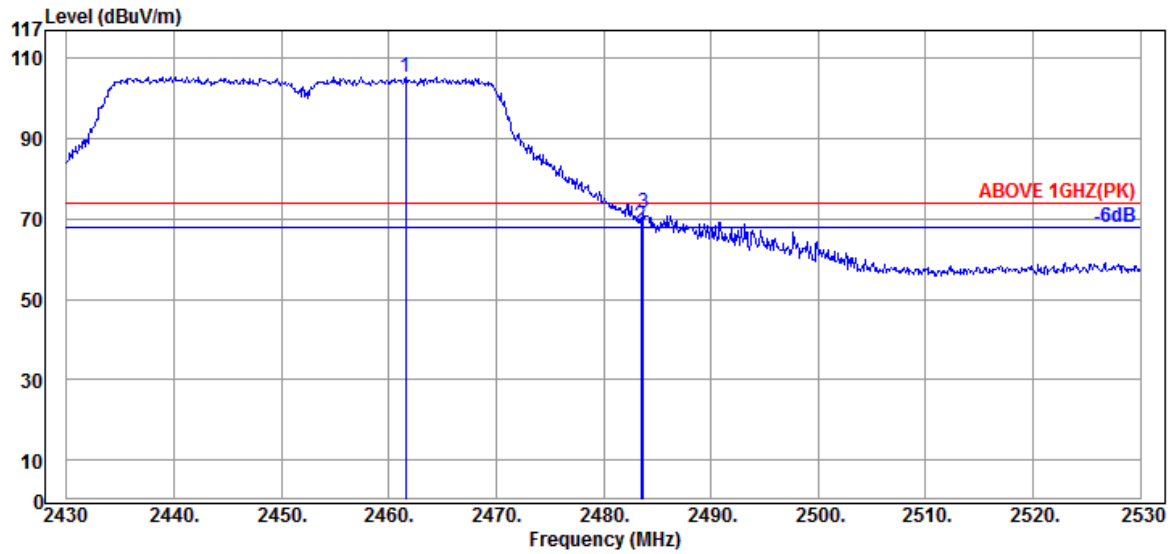

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.60	32.25	6.65	66.58	105.48	---	---	Peak
	2483.50	32.28	6.67	29.60	68.55	74.00	5.45	Peak
	2483.70	32.28	6.67	32.43	71.38	74.00	2.62	Peak

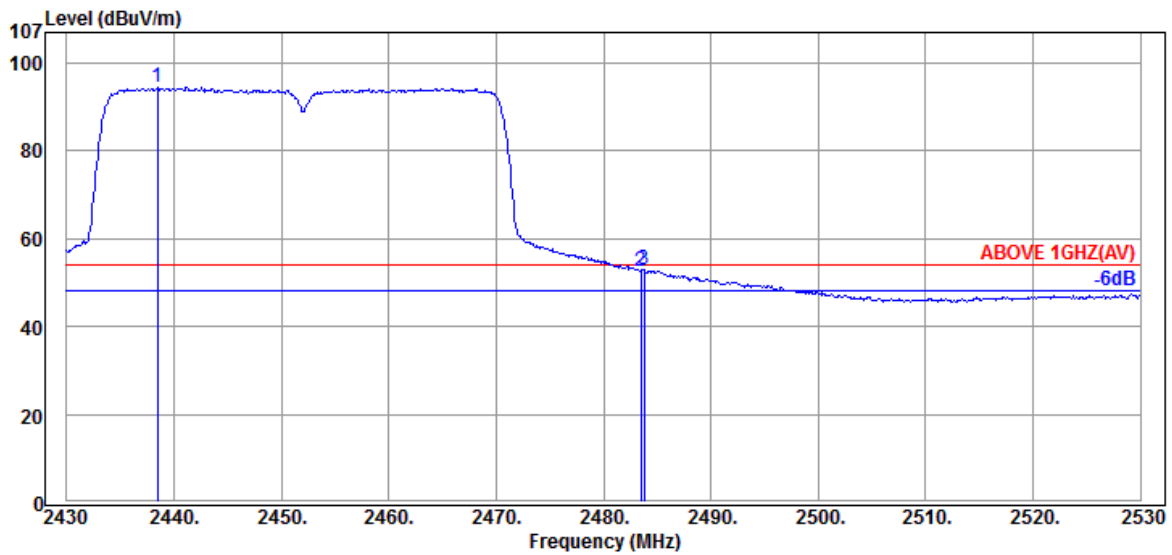


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2438.50	32.23	6.63	55.59	94.45	---	---	Average
	2483.50	32.28	6.67	13.66	52.61	54.00	1.39	Average
	2483.80	32.28	6.67	13.95	52.90	54.00	1.10	Average

備註：“@”為主波，在此章節是不予以判定。


● No. 14 Omni Antenna (M/N ANT795-4MA)

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

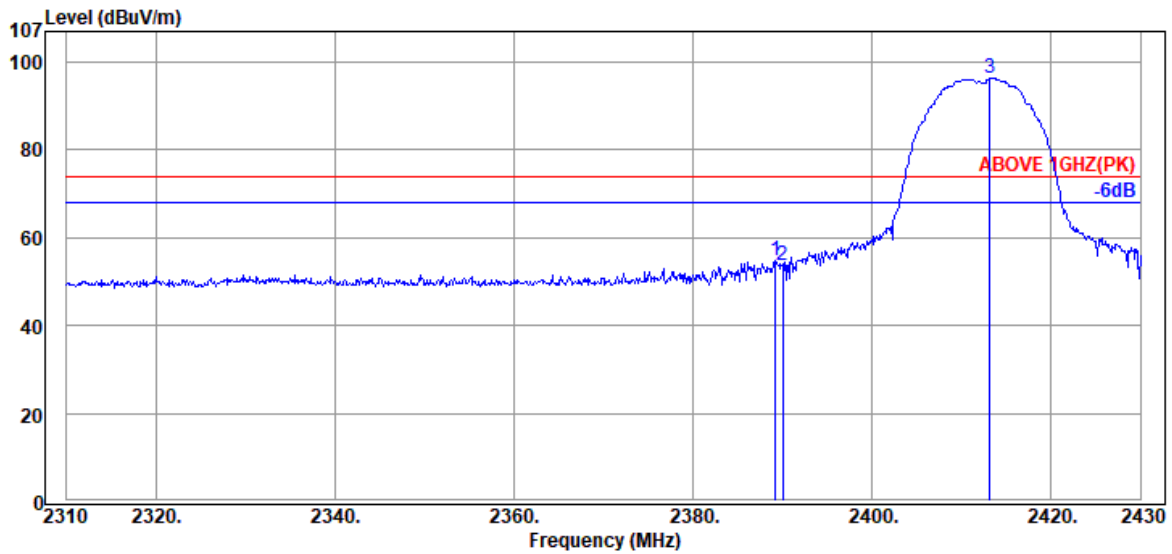

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.20	32.16	6.57	16.11	54.84	74.00	19.16	Peak
2390.04	32.16	6.57	14.89	53.62	74.00	20.38	Peak
@ 2413.20	32.18	6.59	57.55	96.32	---	---	Peak

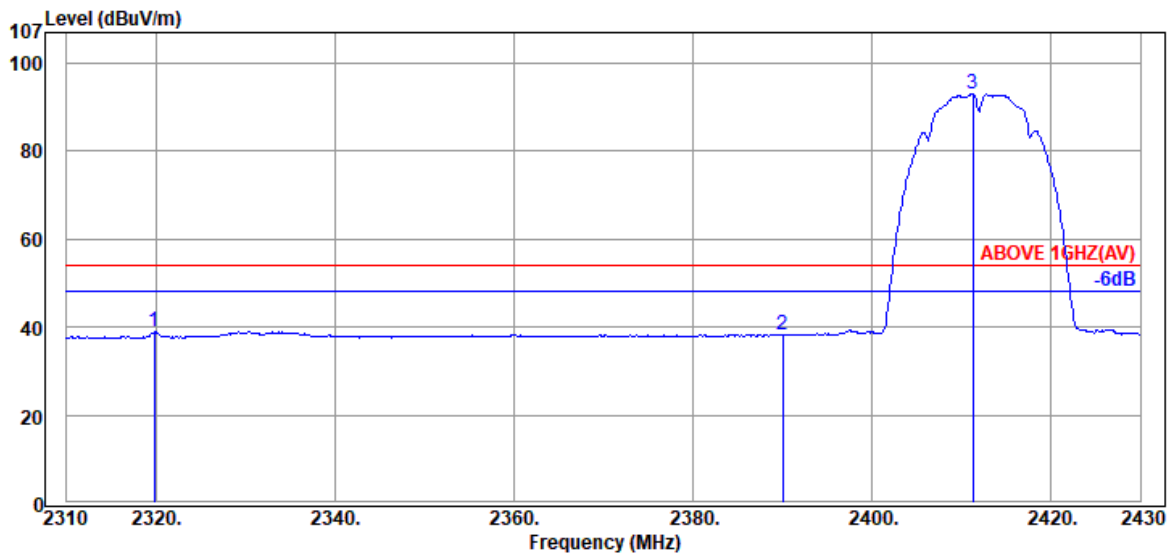


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2319.84	32.06	6.49	0.37	38.92	54.00	15.08	Average
2390.04	32.16	6.57	-0.44	38.29	54.00	15.71	Average
@ 2411.28	32.18	6.59	54.30	93.07	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

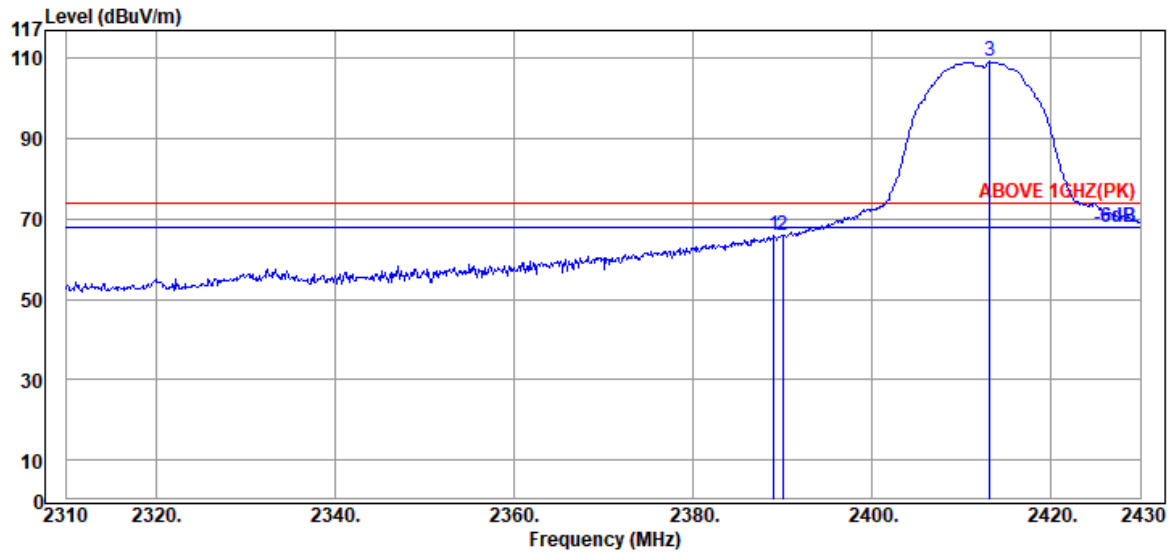

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.08	32.16	6.57	27.02	65.75	74.00	8.25	Peak
2390.04	32.16	6.57	27.34	66.07	74.00	7.93	Peak
@ 2413.20	32.18	6.59	70.39	109.16	---	---	Peak

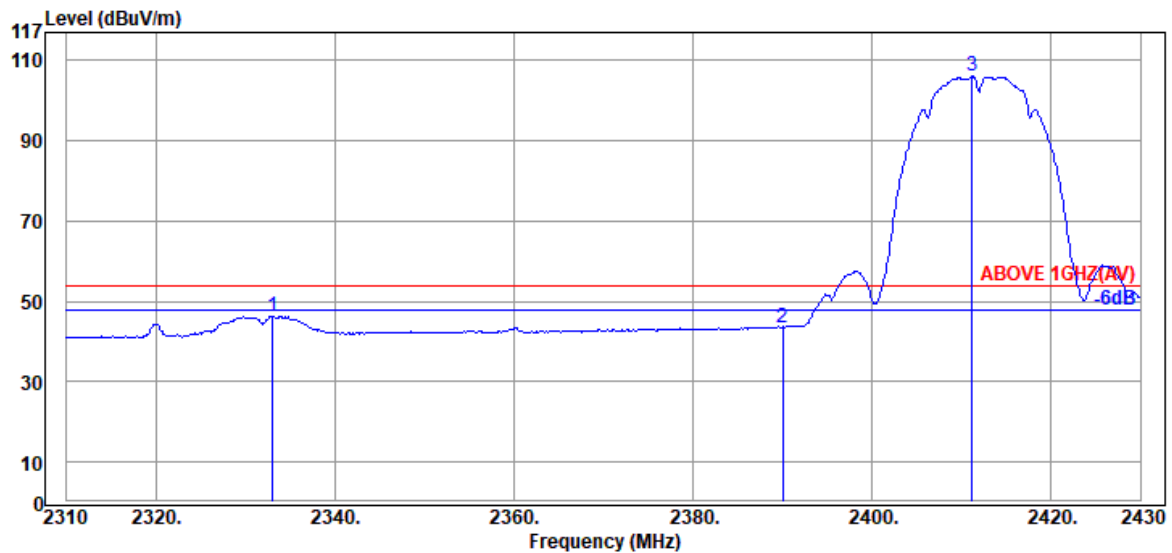


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2333.04	32.06	6.49	7.80	46.35	54.00	7.65	Average
2390.04	32.16	6.57	4.75	43.48	54.00	10.52	Average
@ 2411.16	32.18	6.59	67.26	106.03	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

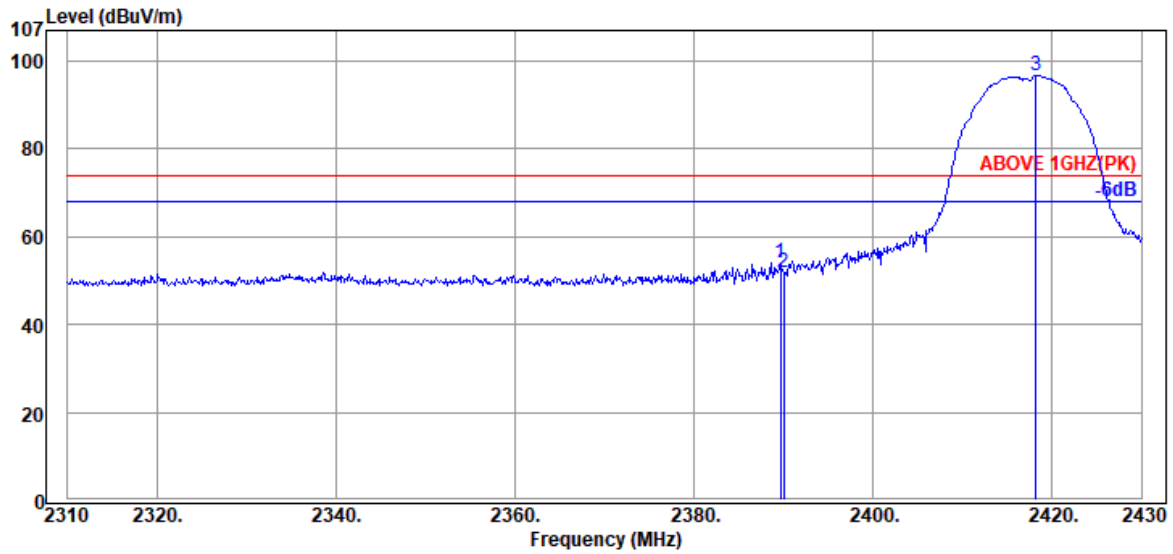

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	32.16	6.57	15.22	53.95	74.00	20.05	Peak
2390.04	32.16	6.57	13.24	51.97	74.00	22.03	Peak
@ 2418.24	32.18	6.59	57.91	96.68	---	---	Peak

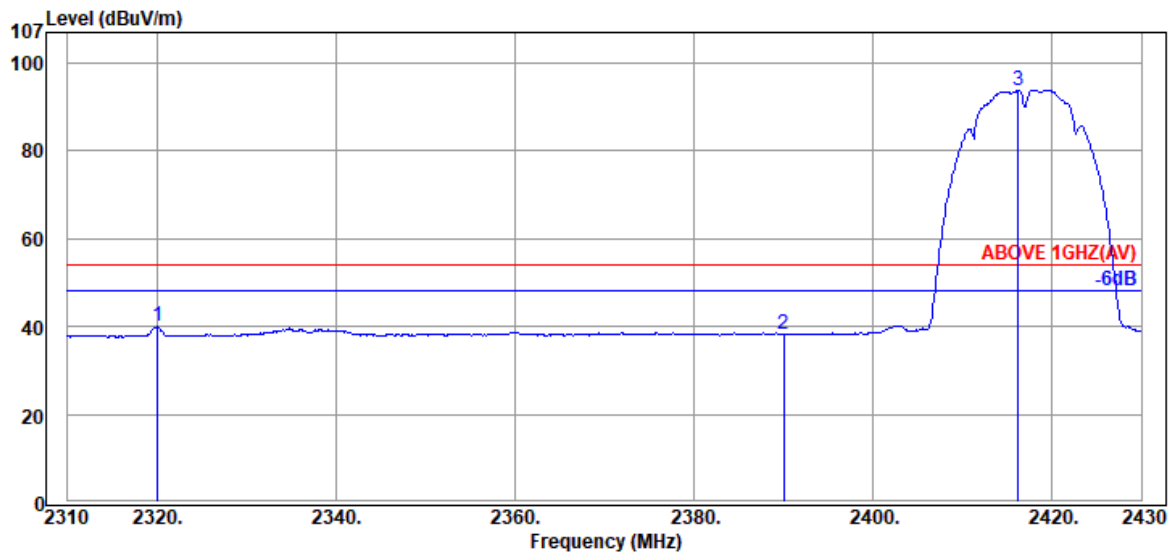


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2320.08	32.06	6.49	1.36	39.91	54.00	14.09	Average
2390.04	32.16	6.57	-0.52	38.21	54.00	15.79	Average
@ 2416.20	32.18	6.59	55.16	93.93	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

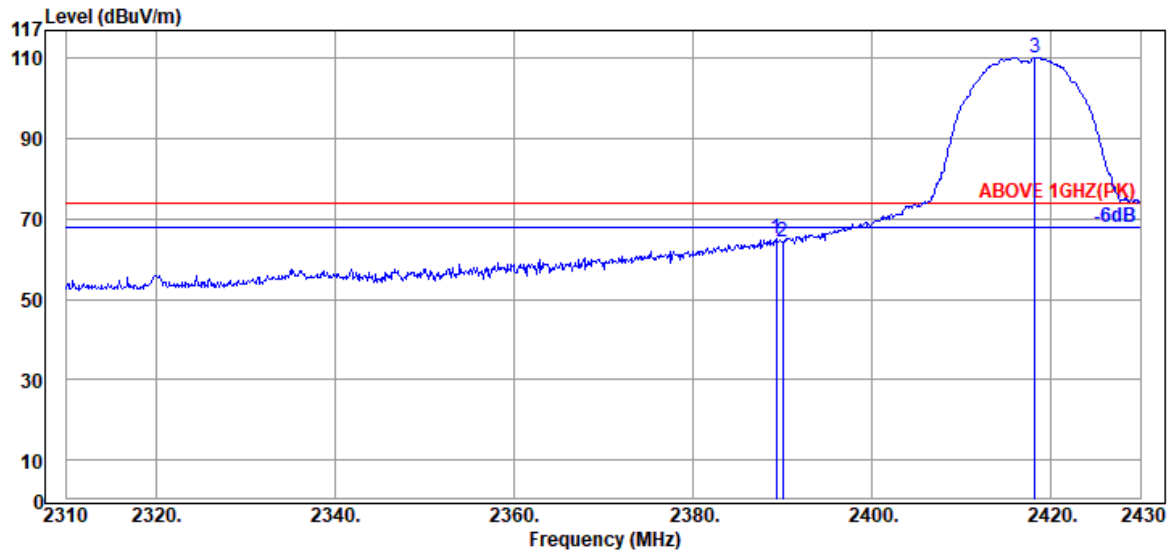

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	32.16	6.57	26.22	64.95	74.00	9.05	Peak
2390.04	32.16	6.57	25.60	64.33	74.00	9.67	Peak
@ 2418.24	32.18	6.59	71.38	110.15	---	---	Peak

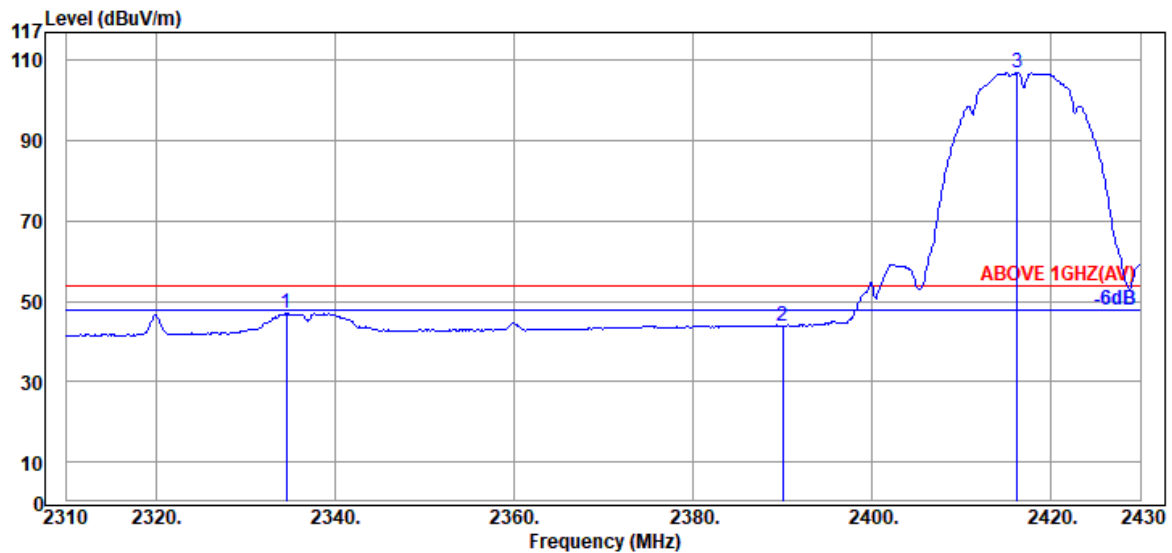


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2334.60	32.08	6.51	8.36	46.95	54.00	7.05	Average
2390.04	32.16	6.57	5.26	43.99	54.00	10.01	Average
@ 2416.20	32.18	6.59	68.20	106.97	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

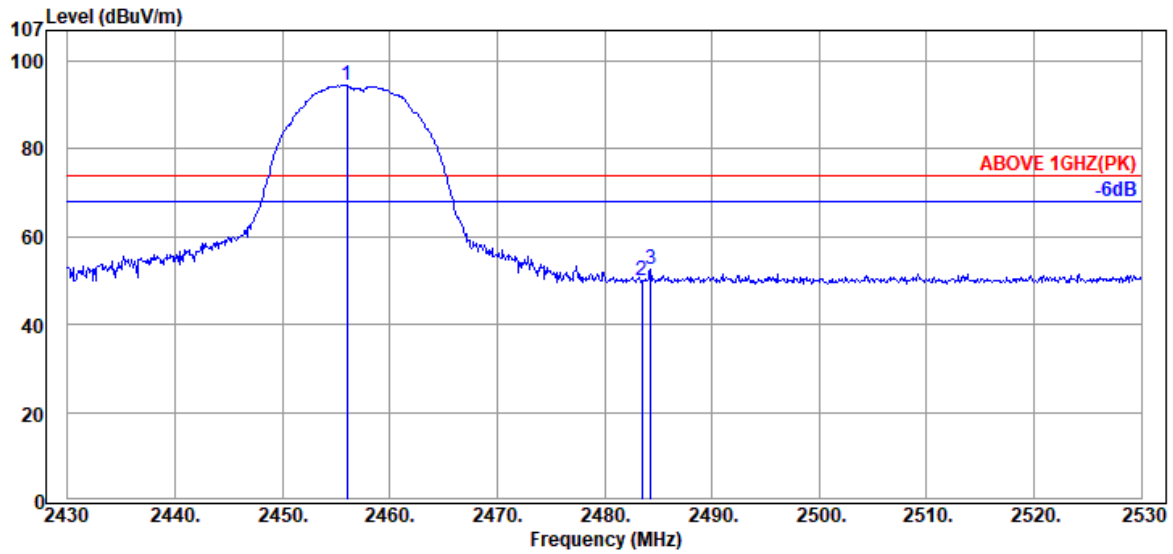

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.00	32.25	6.65	55.55	94.45	---	---	Peak
	2483.50	32.28	6.67	11.12	50.07	74.00	23.93	Peak
	2484.30	32.28	6.67	13.57	52.52	74.00	21.48	Peak

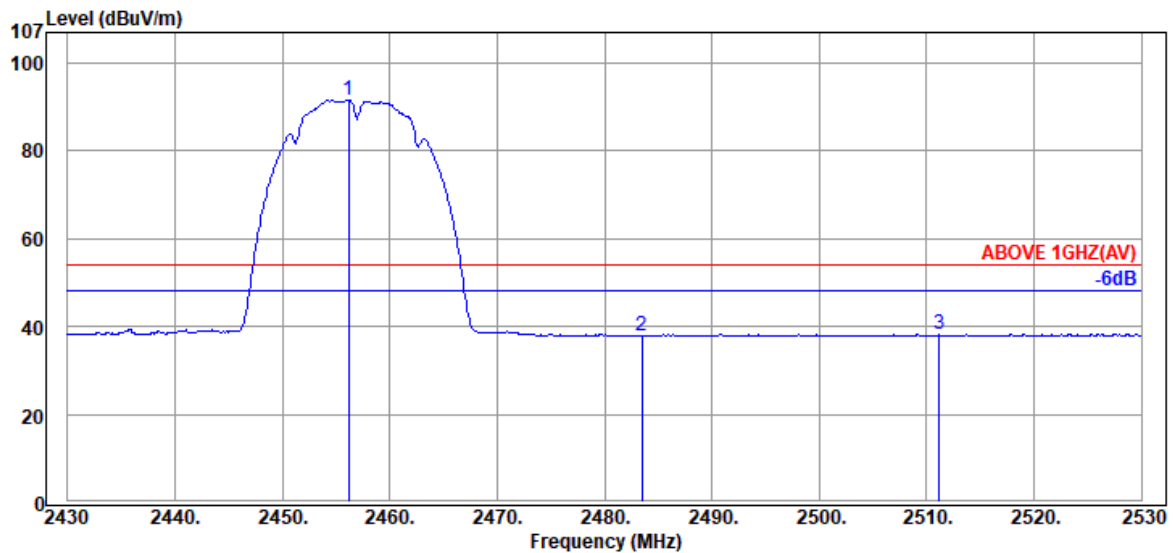


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.20	32.25	6.65	52.84	91.74	---	---	Average
	2483.50	32.28	6.67	-0.93	38.02	54.00	15.98	Average
	2511.20	32.32	6.72	-0.88	38.16	54.00	15.84	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

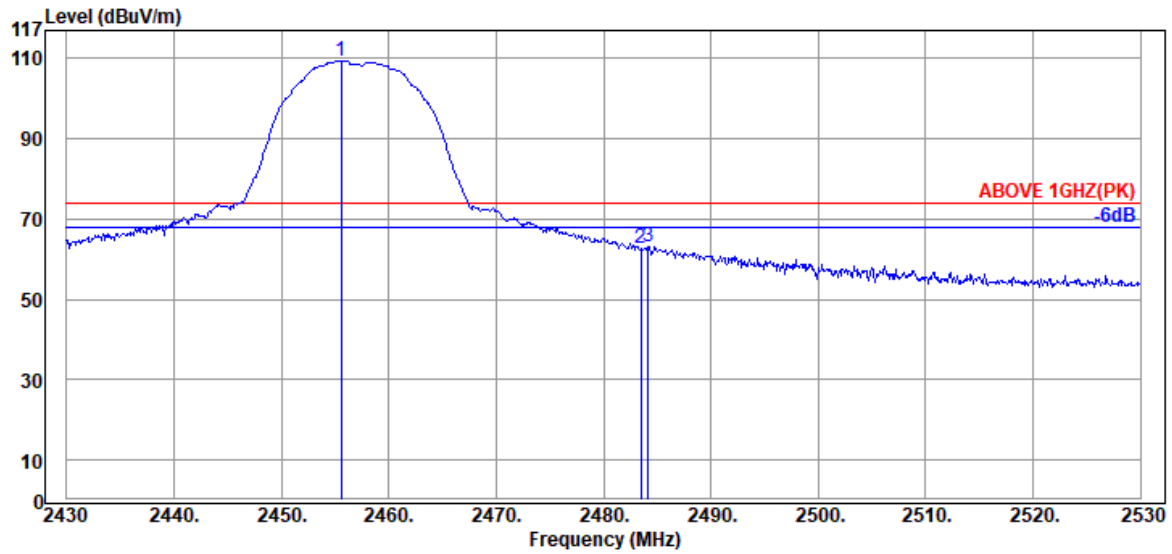

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.60	32.25	6.65	70.44	109.34	---	---	Peak
	2483.50	32.28	6.67	23.72	62.67	74.00	11.33	Peak
	2484.20	32.28	6.67	24.19	63.14	74.00	10.86	Peak

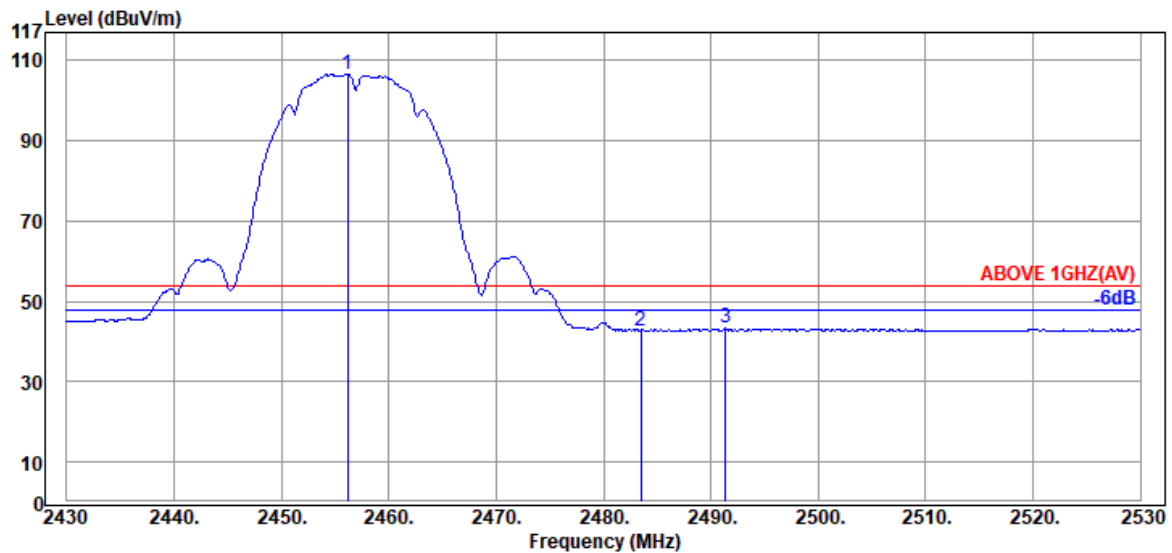


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.20	32.25	6.65	67.77	106.67	---	---	Average
	2483.50	32.28	6.67	3.83	42.78	54.00	11.22	Average
	2491.40	32.30	6.69	4.24	43.23	54.00	10.77	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

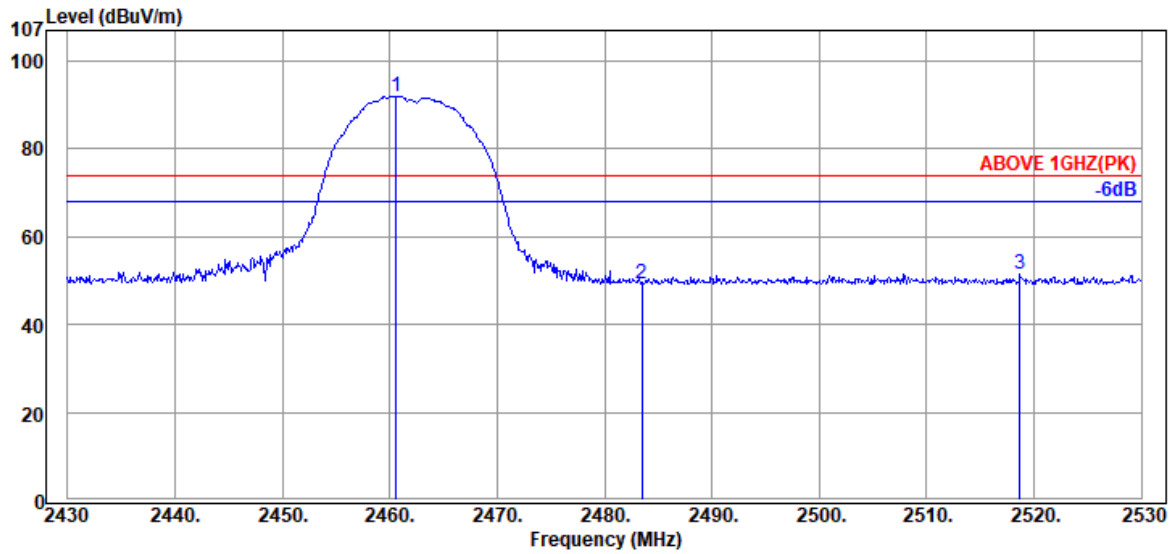

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.60	32.25	6.65	53.18	92.08	---	---	Peak
	2483.50	32.28	6.67	10.39	49.34	74.00	24.66	Peak
	2518.70	32.32	6.72	12.60	51.64	74.00	22.36	Peak

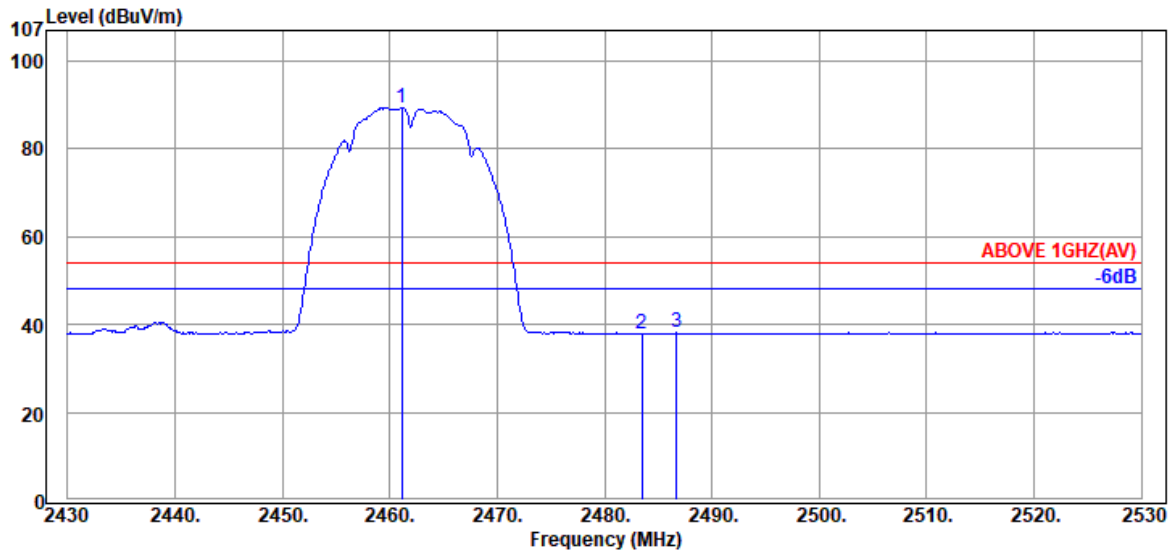


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.10	32.25	6.65	50.53	89.43	---	---	Average
	2483.50	32.28	6.67	-1.14	37.81	54.00	16.19	Average
	2486.70	32.28	6.67	-0.83	38.12	54.00	15.88	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

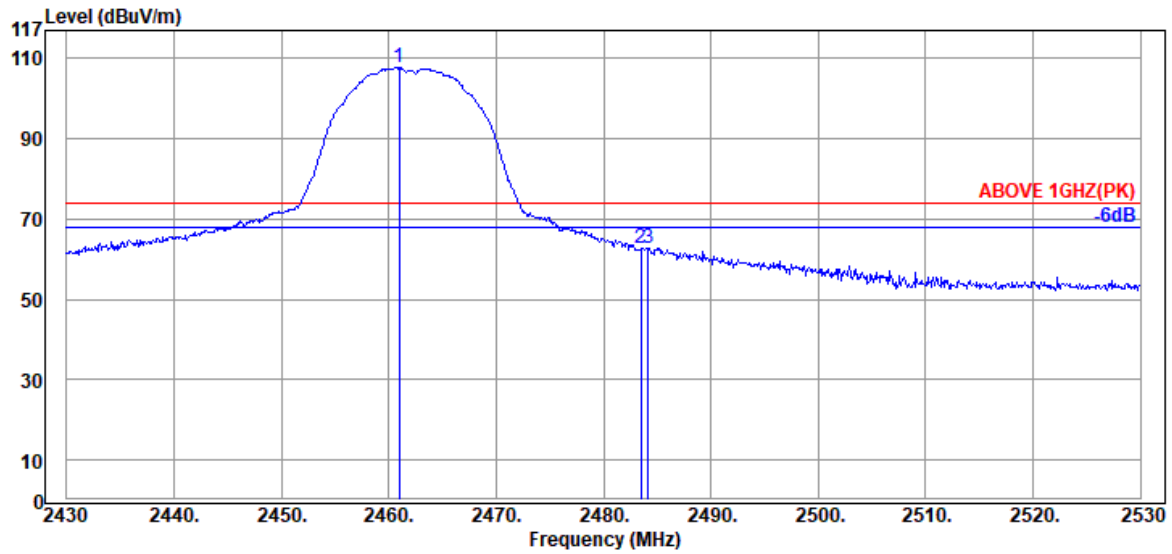

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.00	32.25	6.65	68.69	107.59	---	---	Peak
	2483.50	32.28	6.67	23.93	62.88	74.00	11.12	Peak
	2484.20	32.28	6.67	23.89	62.84	74.00	11.16	Peak

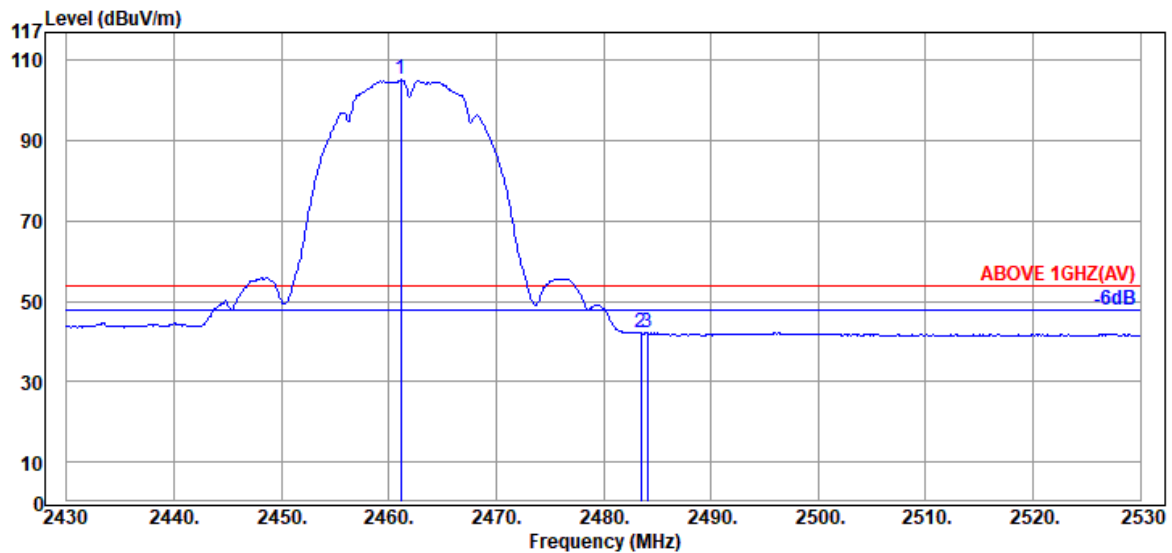


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.10	32.25	6.65	66.24	105.14	---	---	Average
	2483.50	32.28	6.67	3.34	42.29	54.00	11.71	Average
	2484.10	32.28	6.67	3.20	42.15	54.00	11.85	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

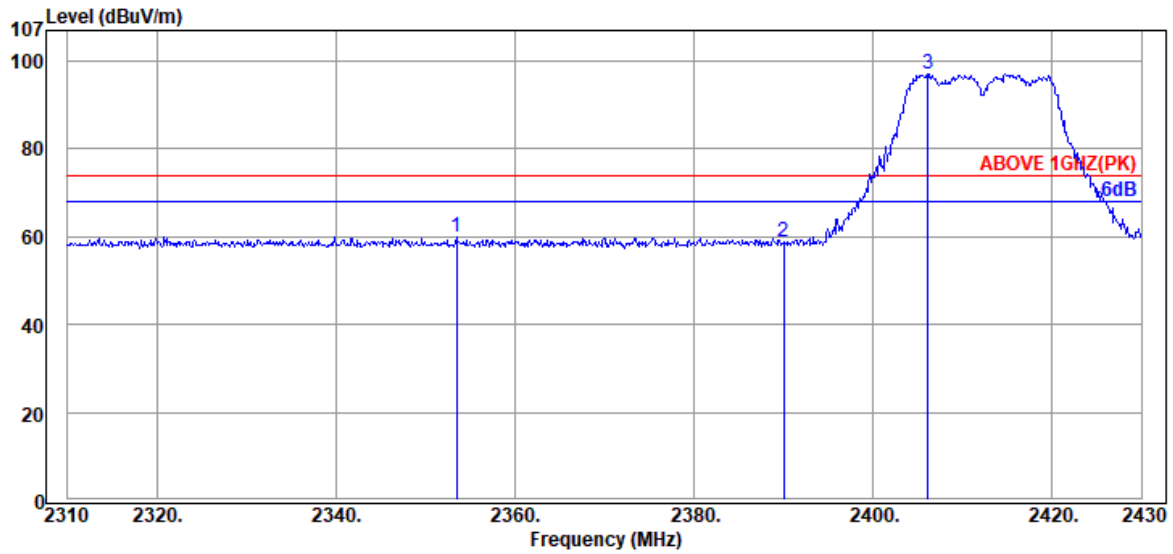

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2353.44	32.11	6.53	21.20	59.84	74.00	14.16	Peak
2390.04	32.16	6.57	20.15	58.88	74.00	15.12	Peak
@ 2406.12	32.18	6.59	58.38	97.15	---	---	Peak

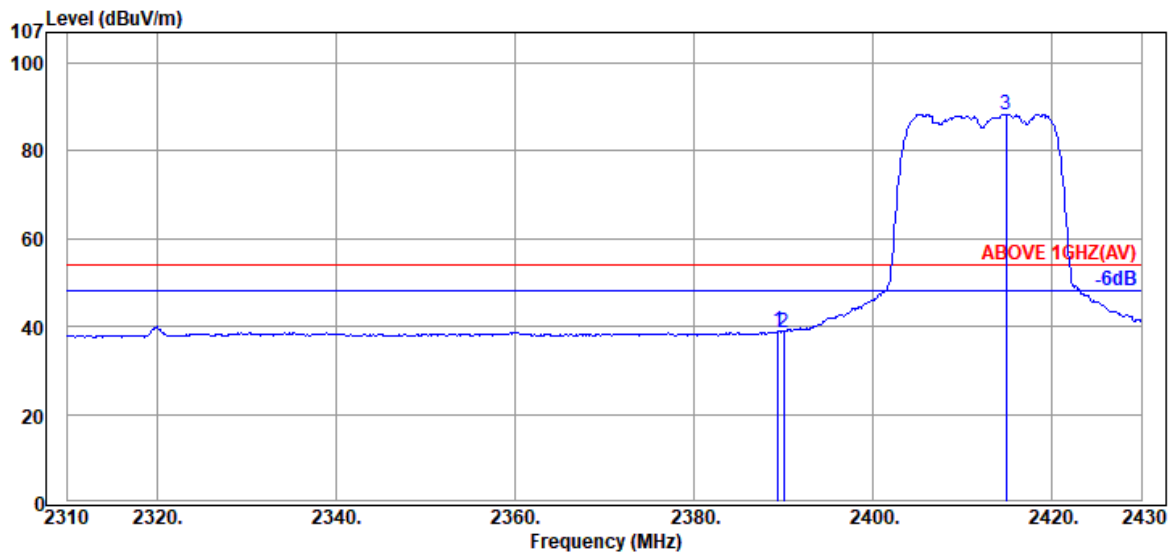


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.44	32.16	6.57	0.14	38.87	54.00	15.13	Average
2390.04	32.16	6.57	0.02	38.75	54.00	15.25	Average
@ 2414.88	32.18	6.59	49.65	88.42	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

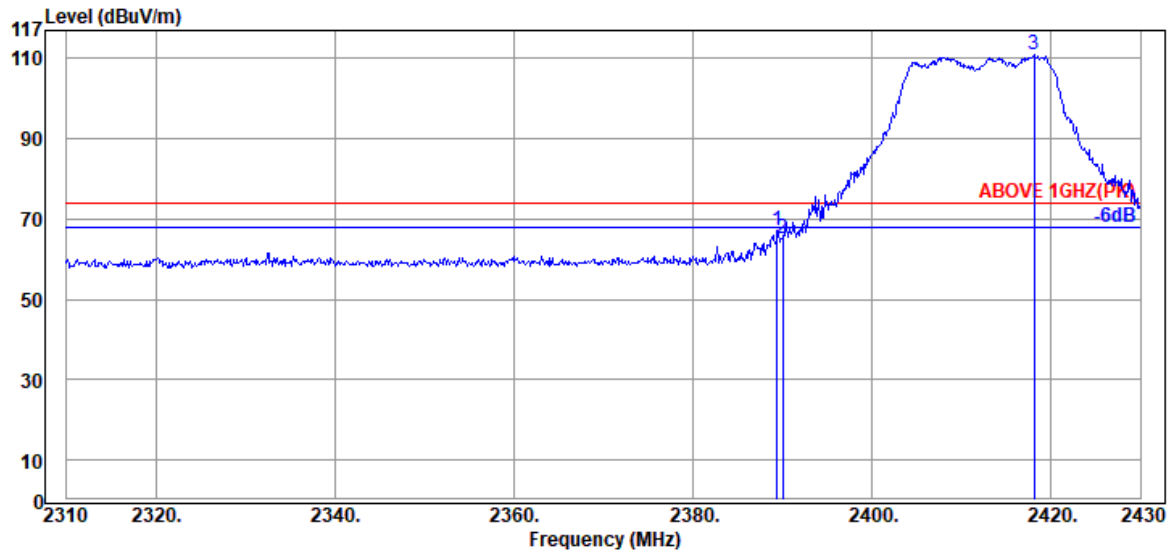

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.44	32.16	6.57	28.47	67.20	74.00	6.80	Peak
2390.04	32.16	6.57	26.28	65.01	74.00	8.99	Peak
@ 2418.12	32.18	6.59	72.21	110.98	---	---	Peak

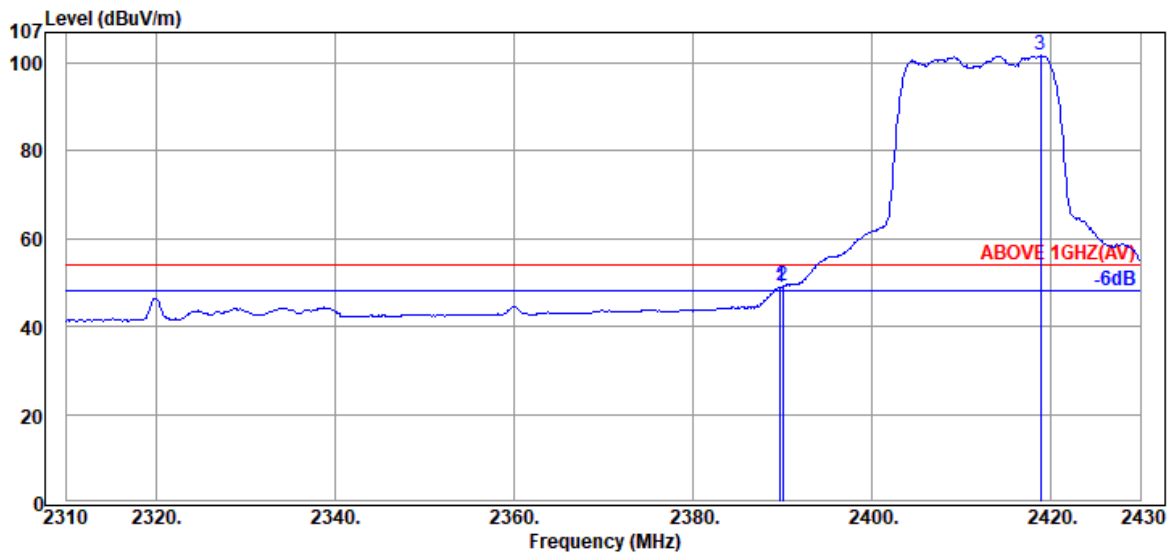


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.80	32.16	6.57	10.27	49.00	54.00	5.00	Average
2390.04	32.16	6.57	10.38	49.11	54.00	4.89	Average
@ 2418.84	32.18	6.59	62.90	101.67	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

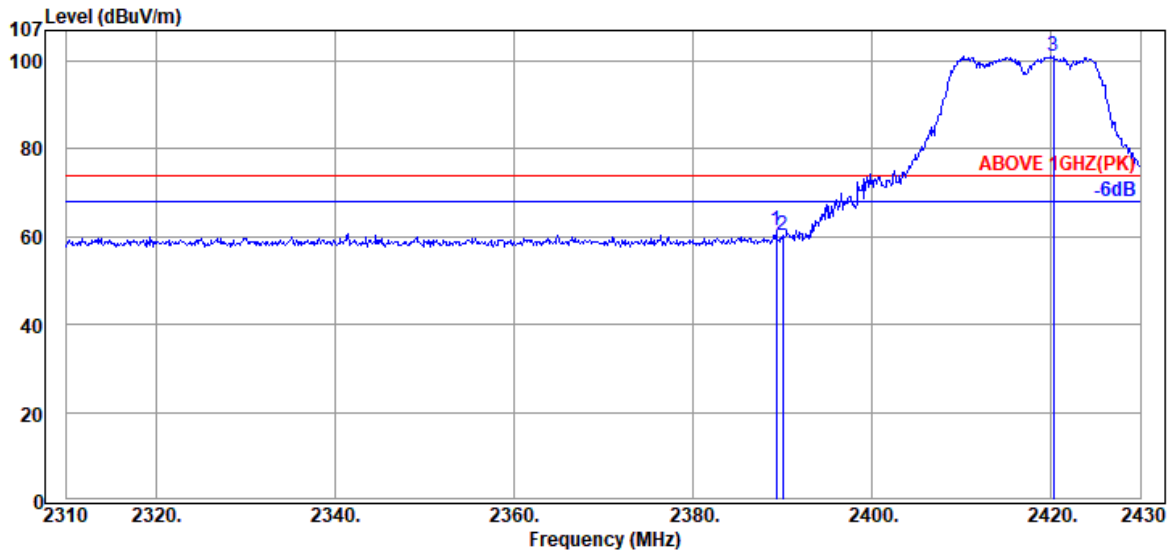

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	32.16	6.57	22.59	61.32	74.00	12.68	Peak
2390.04	32.16	6.57	21.75	60.48	74.00	13.52	Peak
@ 2420.28	32.20	6.61	62.37	101.18	---	---	Peak

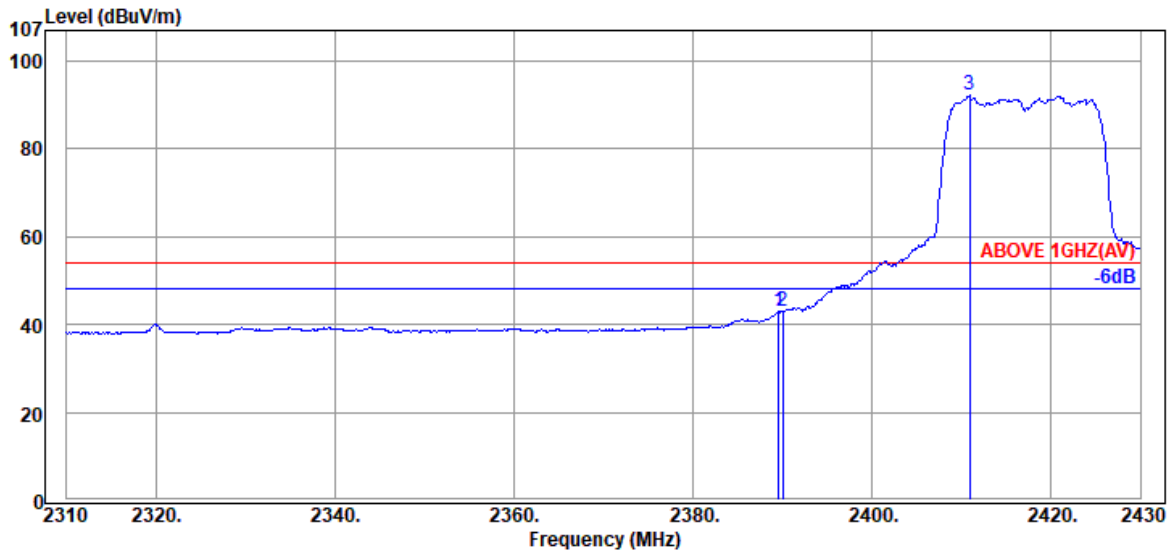


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	32.16	6.57	4.31	43.04	54.00	10.96	Average
2390.04	32.16	6.57	4.17	42.90	54.00	11.10	Average
@ 2410.92	32.18	6.59	53.38	92.15	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

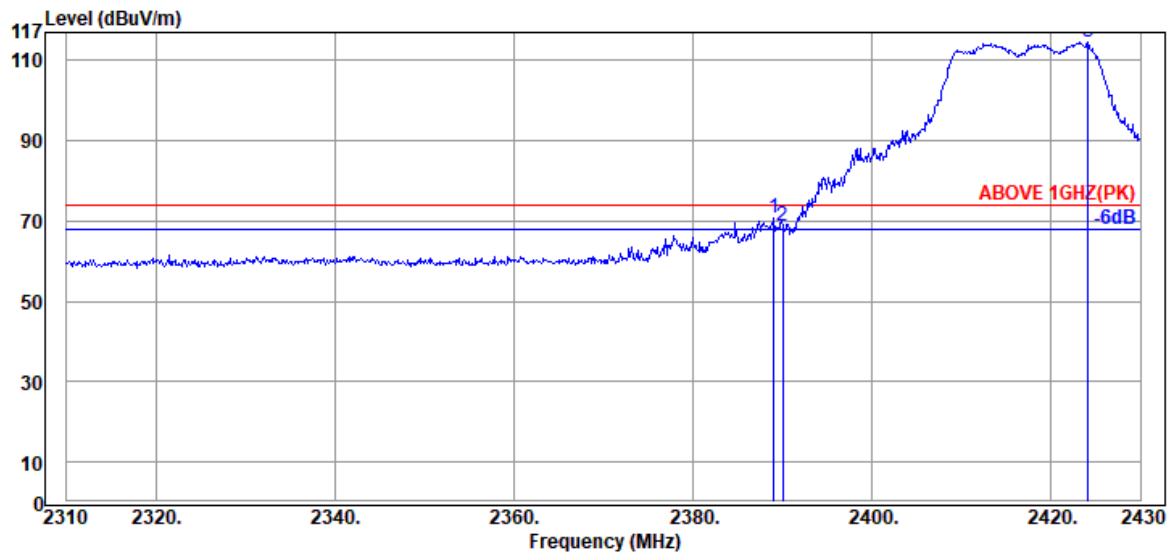

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.08	32.16	6.57	31.88	70.61	74.00	3.39	Peak
2390.04	32.16	6.57	30.08	68.81	74.00	5.19	Peak
@ 2424.12	32.20	6.61	75.92	114.73	---	---	Peak

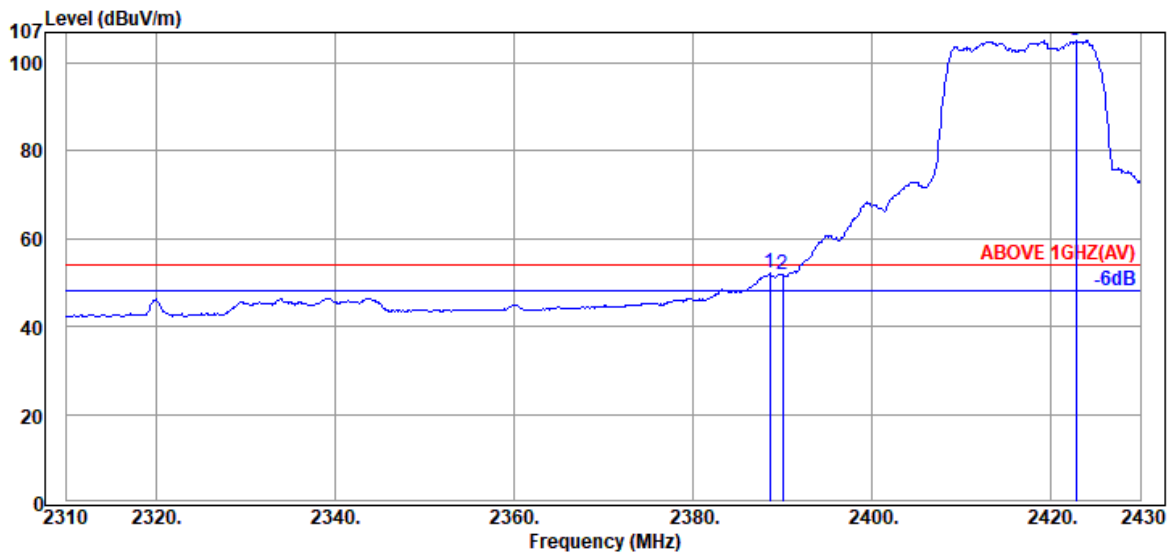


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.60	32.16	6.57	13.32	52.05	54.00	1.95	Average
2390.04	32.16	6.57	13.07	51.80	54.00	2.20	Average
@ 2422.80	32.20	6.61	66.29	105.10	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

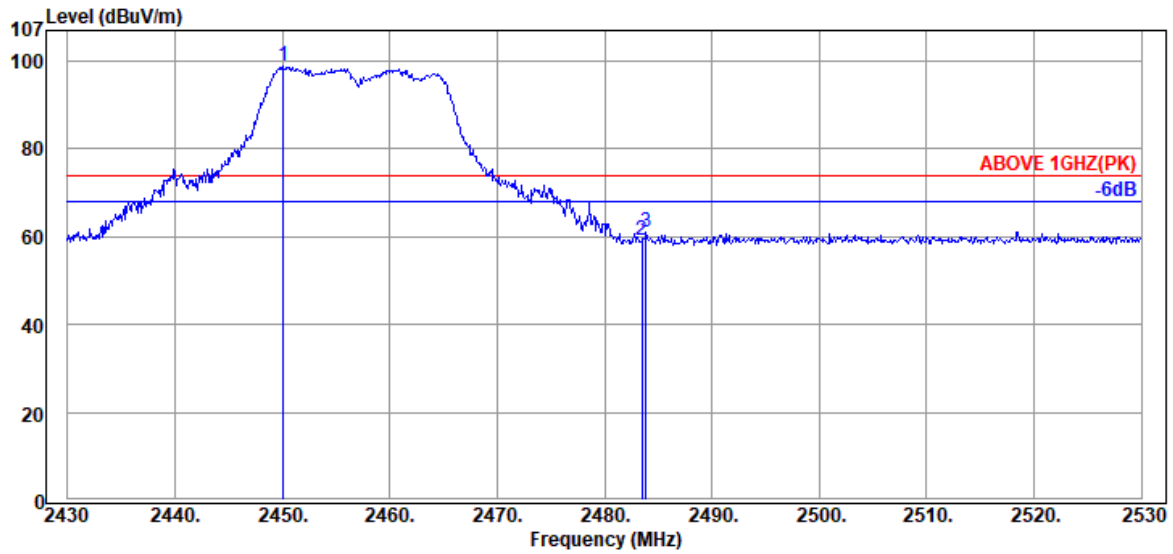

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2450.10	32.23	6.63	60.11	98.97	---	---	Peak
	2483.50	32.28	6.67	20.39	59.34	74.00	14.66	Peak
	2483.90	32.28	6.67	22.19	61.14	74.00	12.86	Peak

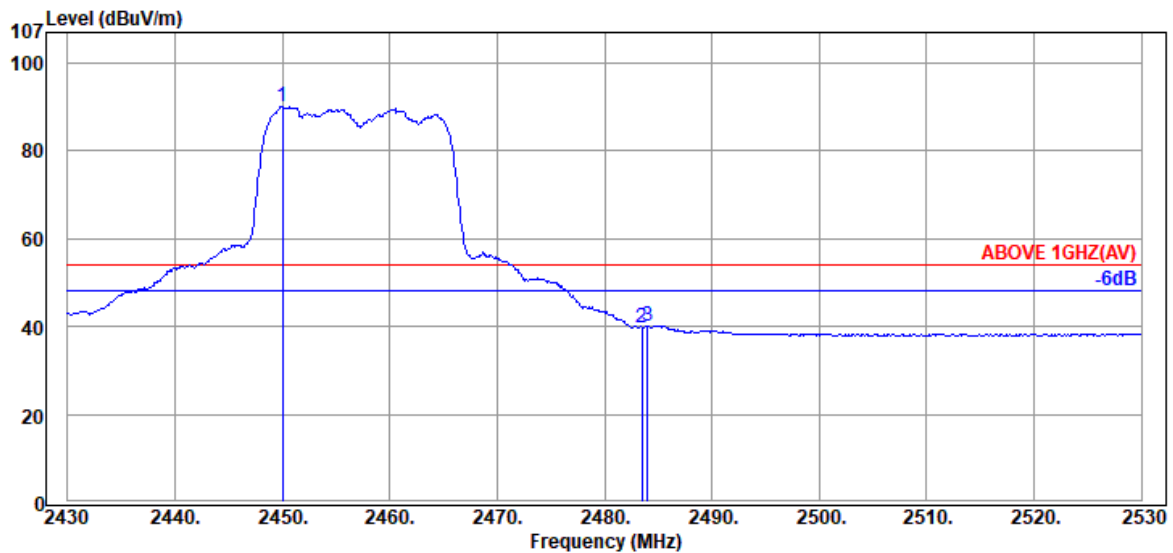


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2450.00	32.23	6.63	51.22	90.08	---	---	Average
	2483.50	32.28	6.67	0.93	39.88	54.00	14.12	Average
	2484.00	32.28	6.67	1.23	40.18	54.00	13.82	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

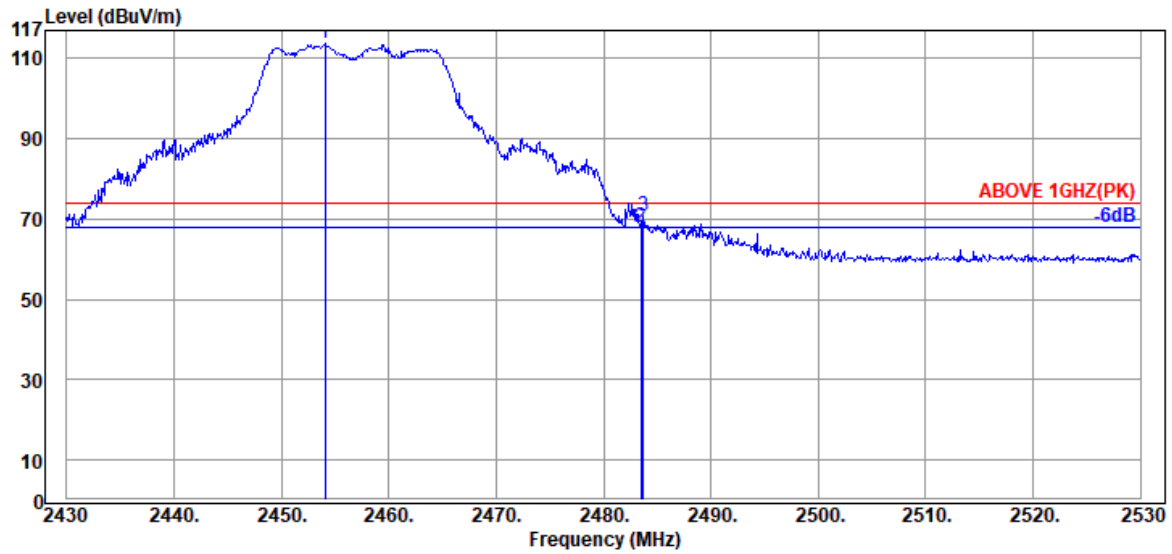

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2454.10	32.25	6.65	74.69	113.59	---	---	Peak
	2483.50	32.28	6.67	29.06	68.01	74.00	5.99	Peak
	2483.70	32.28	6.67	31.79	70.74	74.00	3.26	Peak

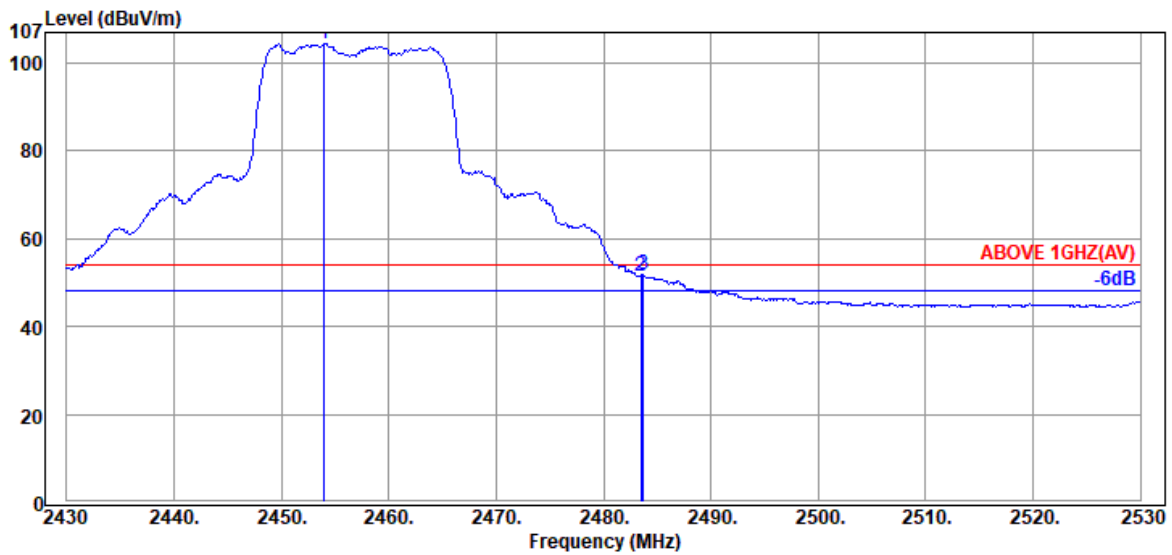


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2454.00	32.25	6.65	65.51	104.41	---	---	Average
	2483.50	32.28	6.67	12.70	51.65	54.00	2.35	Average
	2483.70	32.28	6.67	12.86	51.81	54.00	2.19	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

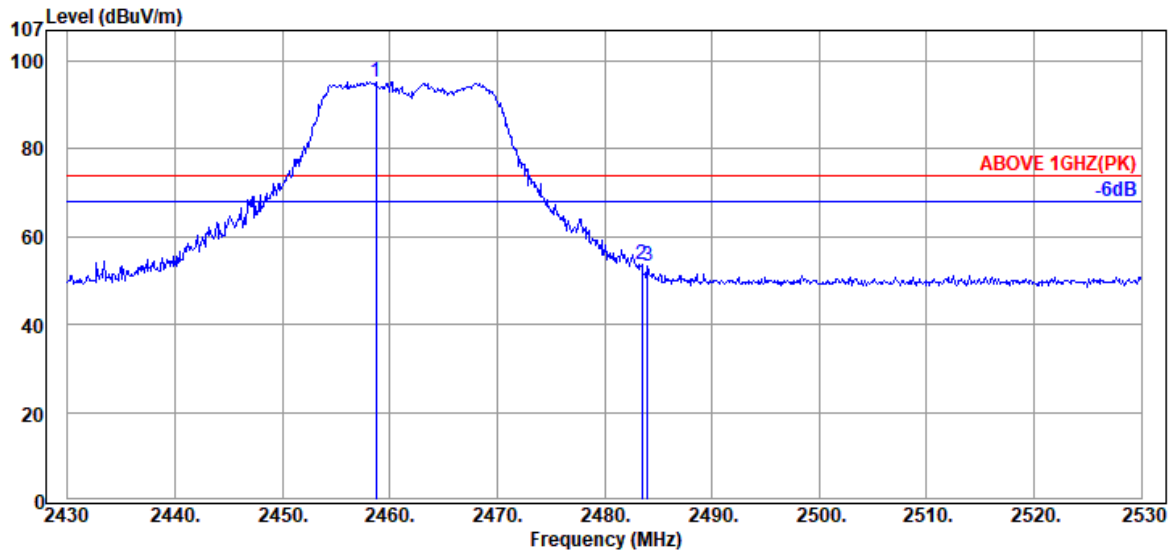

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.70	32.25	6.65	56.43	95.33	---	---	Peak
	2483.50	32.28	6.67	14.66	53.61	74.00	20.39	Peak
	2484.00	32.28	6.67	14.24	53.19	74.00	20.81	Peak

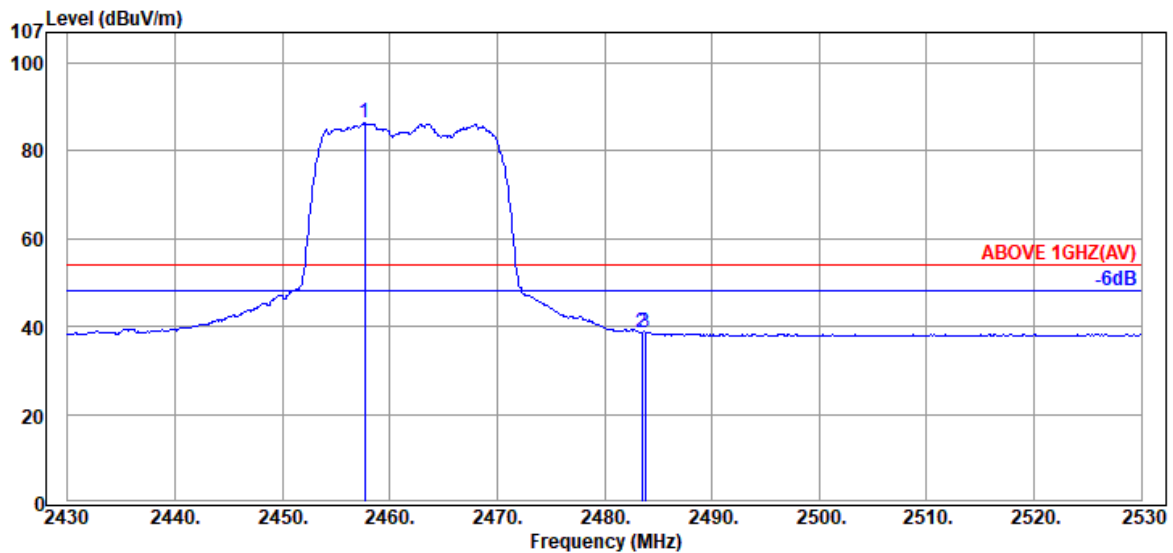


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2457.70	32.25	6.65	47.46	86.36	---	---	Average
	2483.50	32.28	6.67	-0.27	38.68	54.00	15.32	Average
	2483.80	32.28	6.67	-0.27	38.68	54.00	15.32	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

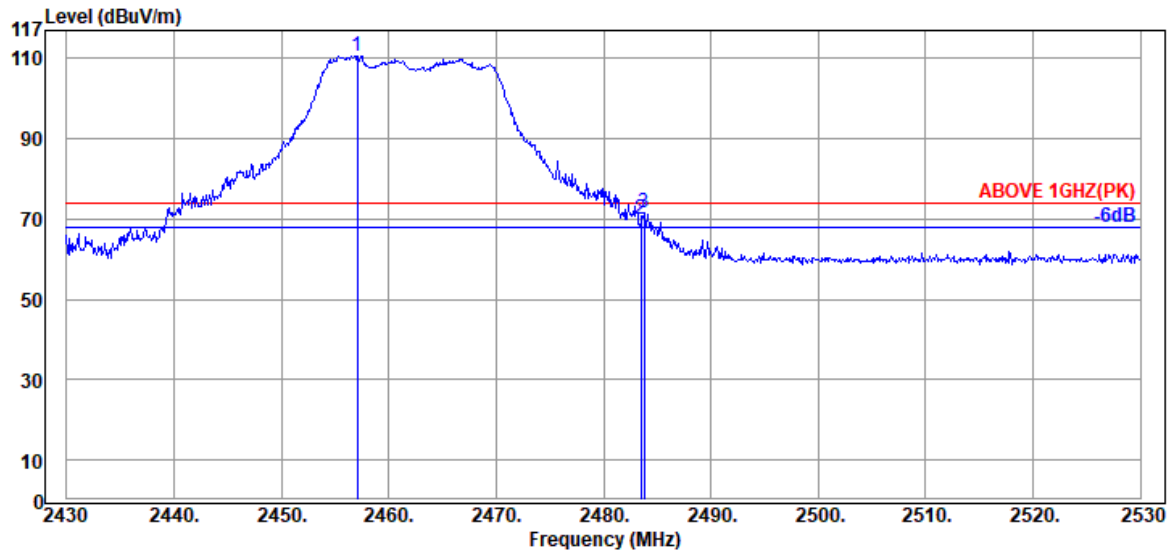

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2457.10	32.25	6.65	71.79	110.69	---	---	Peak
	2483.50	32.28	6.67	30.99	69.94	74.00	4.06	Peak
	2483.80	32.28	6.67	32.46	71.41	74.00	2.59	Peak

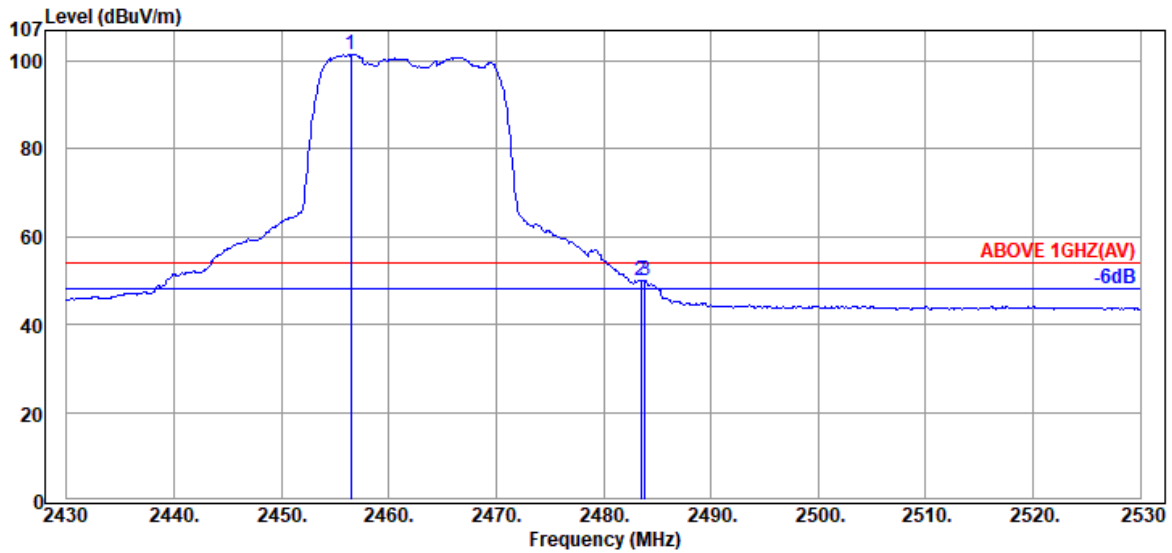


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2456.50	32.25	6.65	62.70	101.60	---	---	Average
	2483.50	32.28	6.67	11.20	50.15	54.00	3.85	Average
	2483.90	32.28	6.67	11.13	50.08	54.00	3.92	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

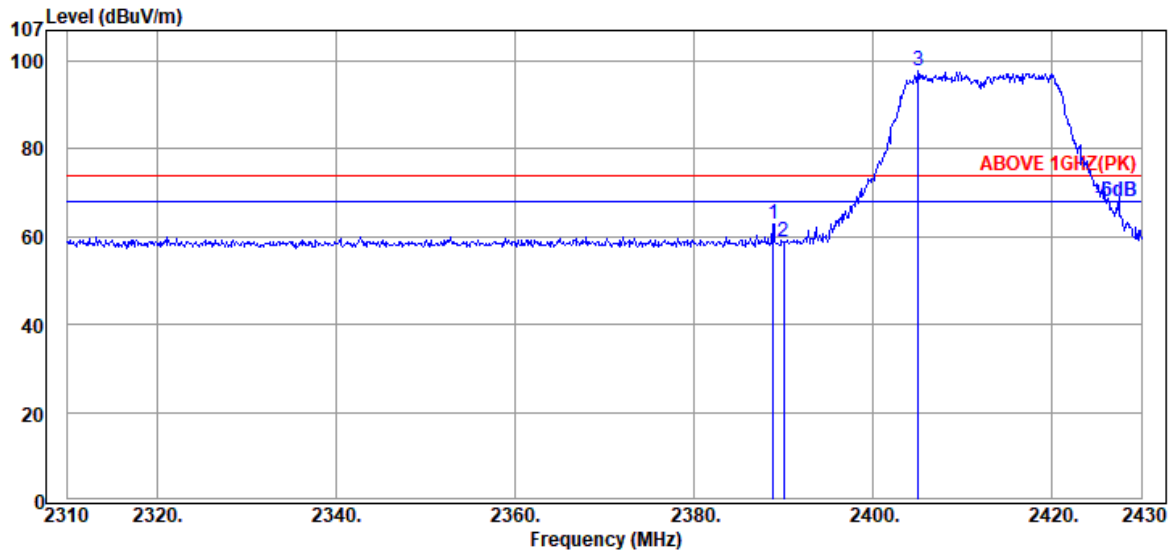

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.84	32.16	6.57	24.15	62.88	74.00	11.12	Peak
2390.04	32.16	6.57	20.10	58.83	74.00	15.17	Peak
@ 2405.04	32.18	6.59	58.85	97.62	---	---	Peak

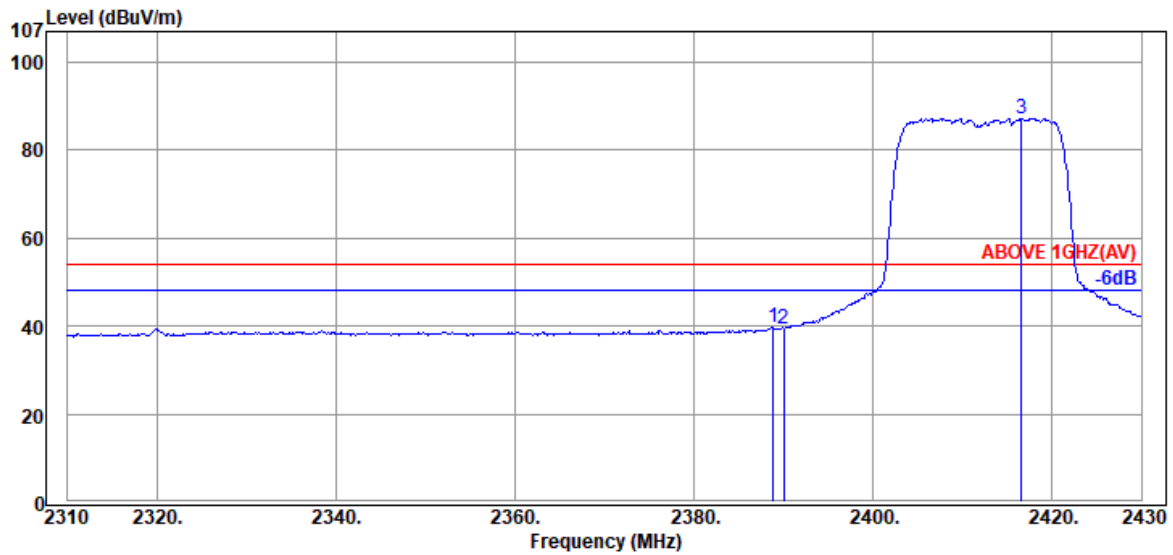


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.84	32.16	6.57	1.02	39.75	54.00	14.25	Average
2390.04	32.16	6.57	0.75	39.48	54.00	14.52	Average
@ 2416.56	32.18	6.59	48.47	87.24	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

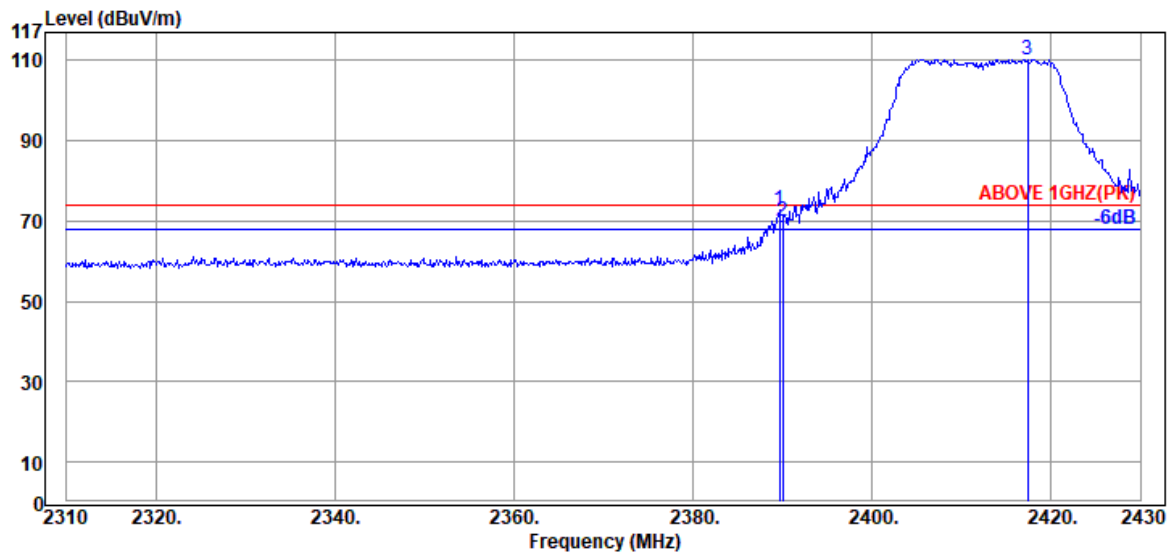

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	32.16	6.57	34.00	72.73	74.00	1.27	Peak
2390.04	32.16	6.57	31.28	70.01	74.00	3.99	Peak
@ 2417.40	32.18	6.59	71.54	110.31	---	---	Peak

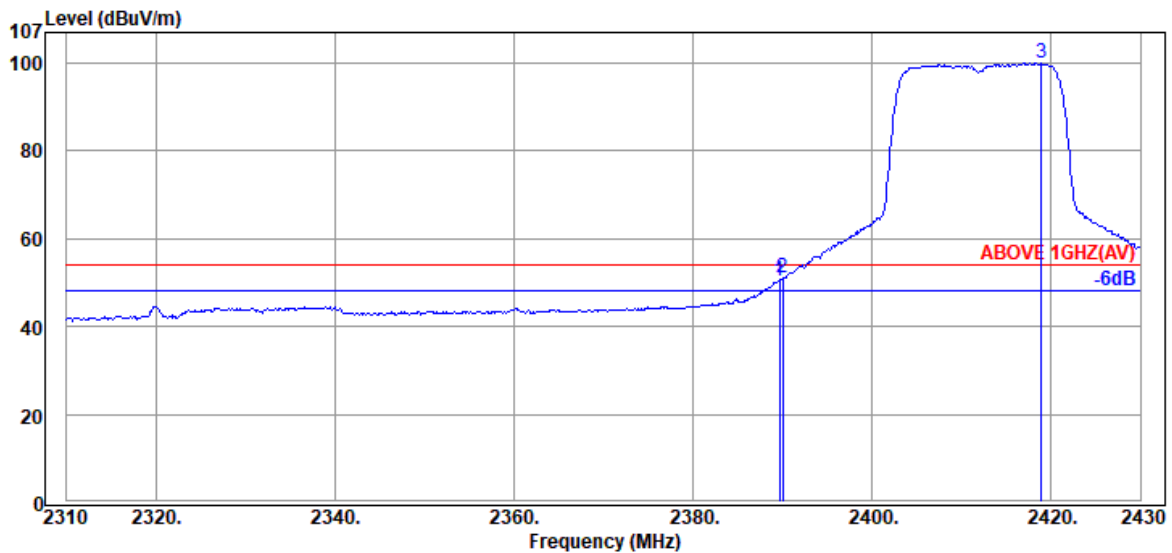


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	32.16	6.57	11.80	50.53	54.00	3.47	Average
2390.04	32.16	6.57	12.34	51.07	54.00	2.93	Average
@ 2418.96	32.18	6.59	61.29	100.06	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

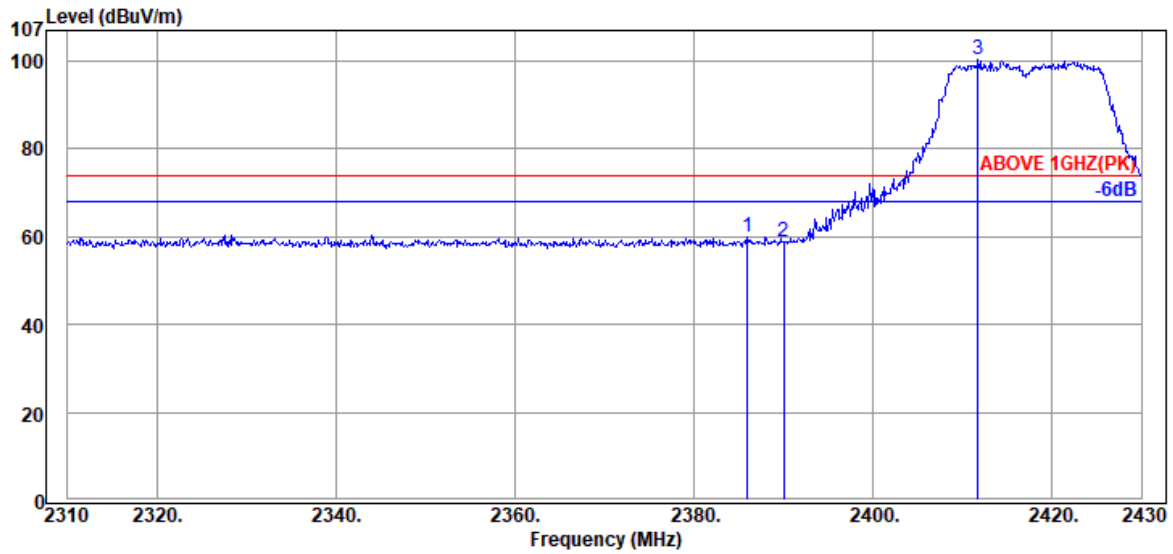

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.96	32.16	6.57	21.06	59.79	74.00	14.21	Peak
2390.04	32.16	6.57	20.12	58.85	74.00	15.15	Peak
@ 2411.76	32.18	6.59	61.54	100.31	---	---	Peak

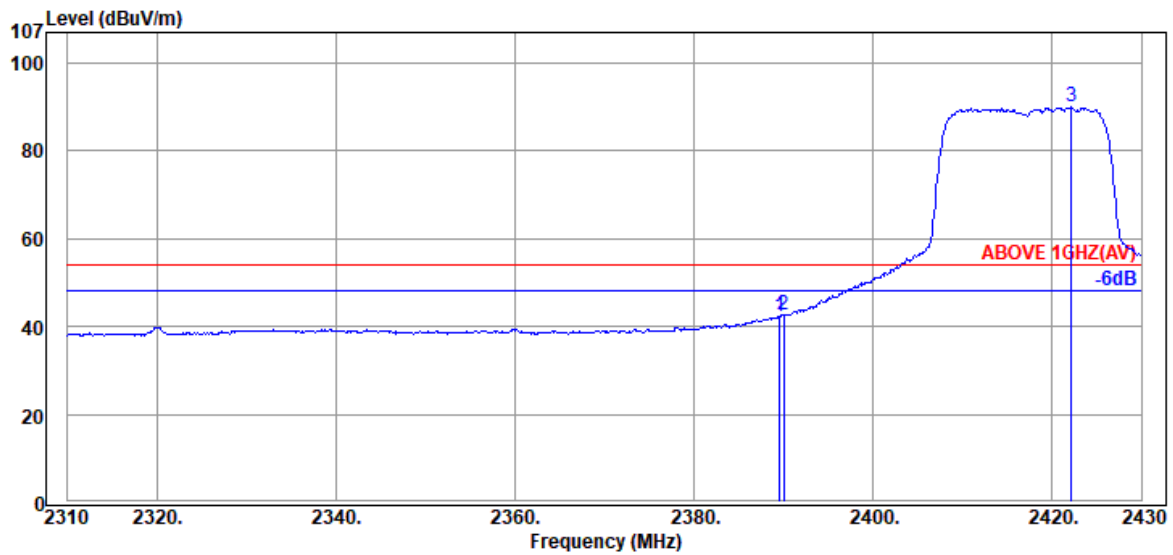


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	32.16	6.57	3.72	42.45	54.00	11.55	Average
2390.04	32.16	6.57	3.80	42.53	54.00	11.47	Average
@ 2422.20	32.20	6.61	51.15	89.96	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

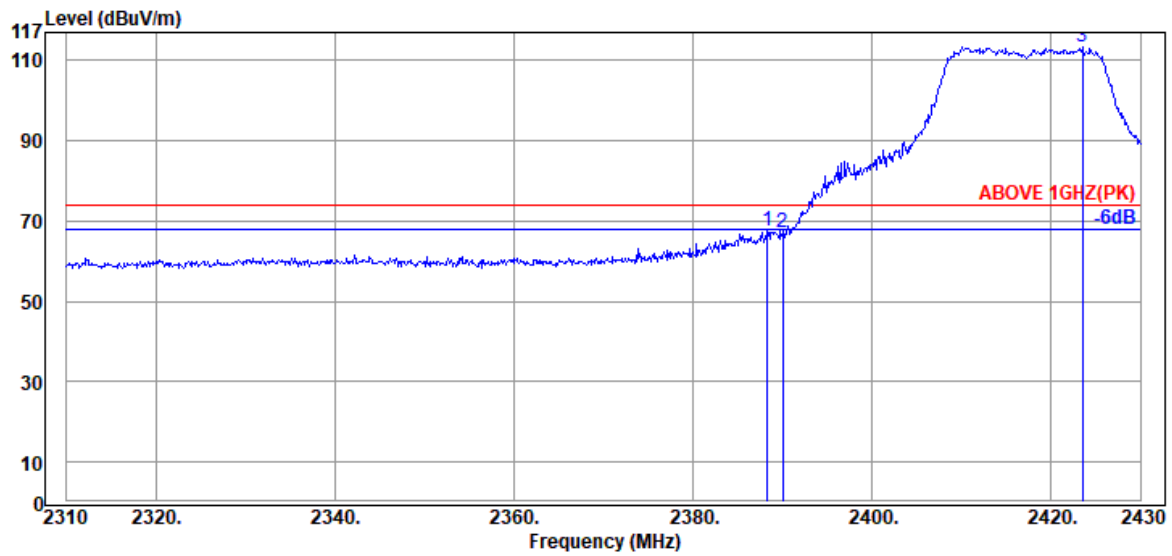

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.36	32.16	6.57	28.84	67.57	74.00	6.43	Peak
2390.04	32.16	6.57	28.36	67.09	74.00	6.91	Peak
@ 2423.52	32.20	6.61	74.45	113.26	---	---	Peak

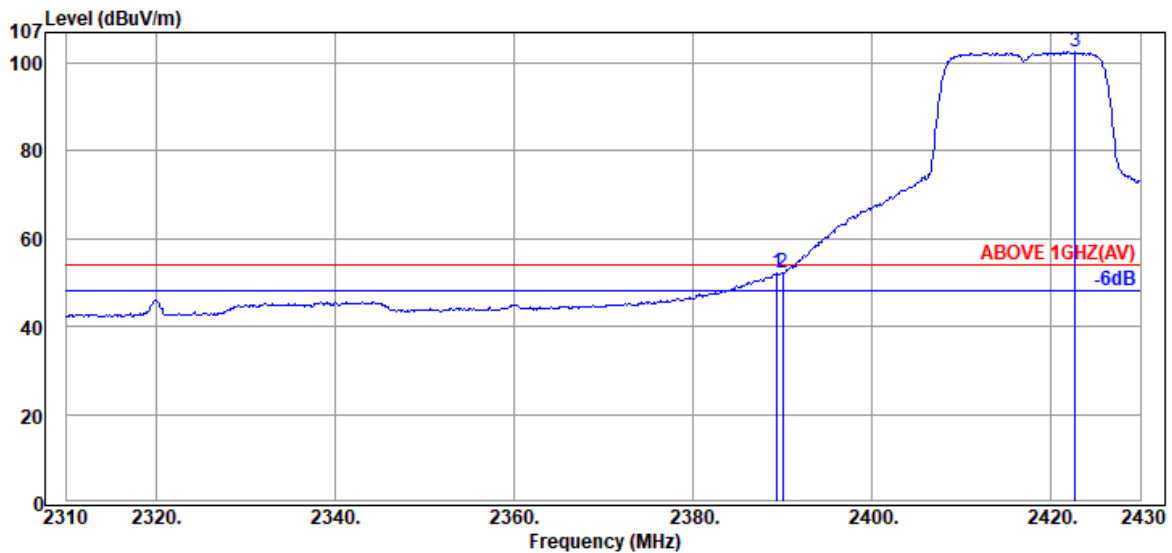


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.44	32.16	6.57	13.46	52.19	54.00	1.81	Average
2390.04	32.16	6.57	13.54	52.27	54.00	1.73	Average
@ 2422.68	32.20	6.61	63.68	102.49	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

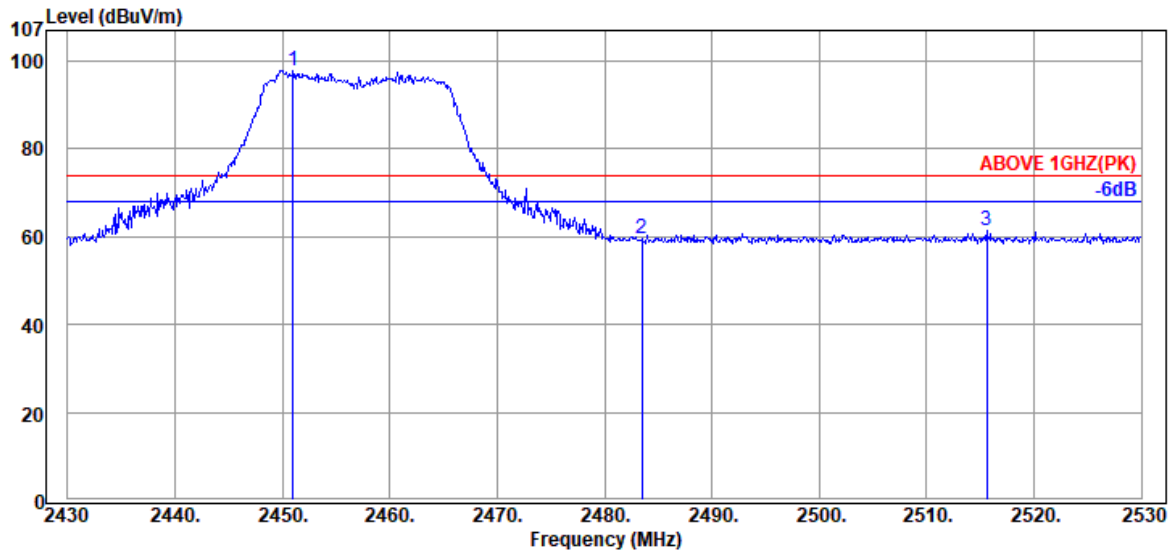

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2451.00	32.23	6.63	59.04	97.90	---	---	Peak
	2483.50	32.28	6.67	20.65	59.60	74.00	14.40	Peak
	2515.60	32.32	6.72	22.49	61.53	74.00	12.47	Peak

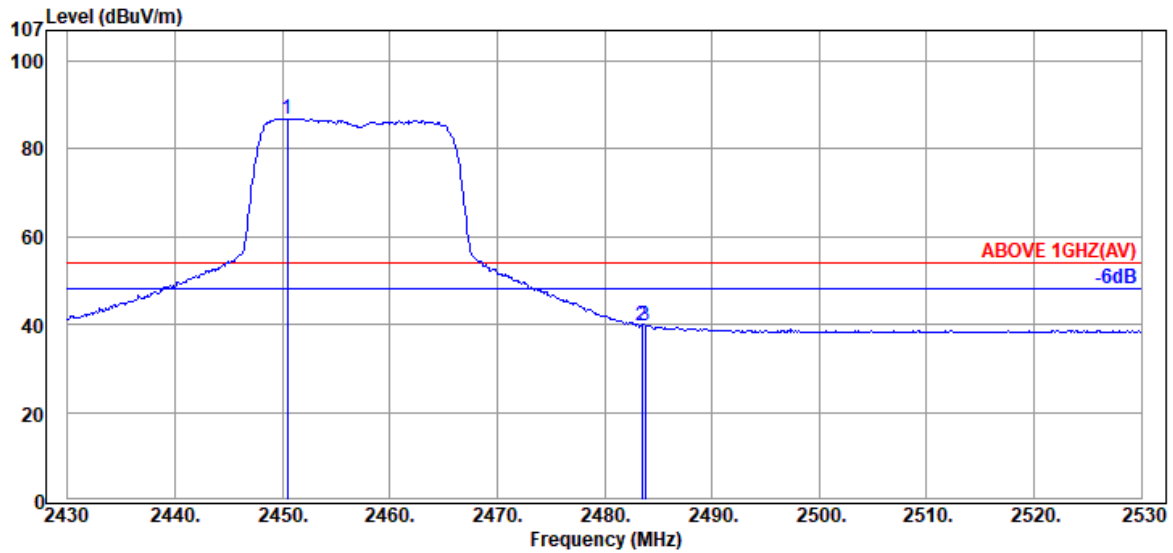


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2450.50	32.23	6.63	48.07	86.93	---	---	Average
	2483.50	32.28	6.67	0.83	39.78	54.00	14.22	Average
	2483.80	32.28	6.67	0.85	39.80	54.00	14.20	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

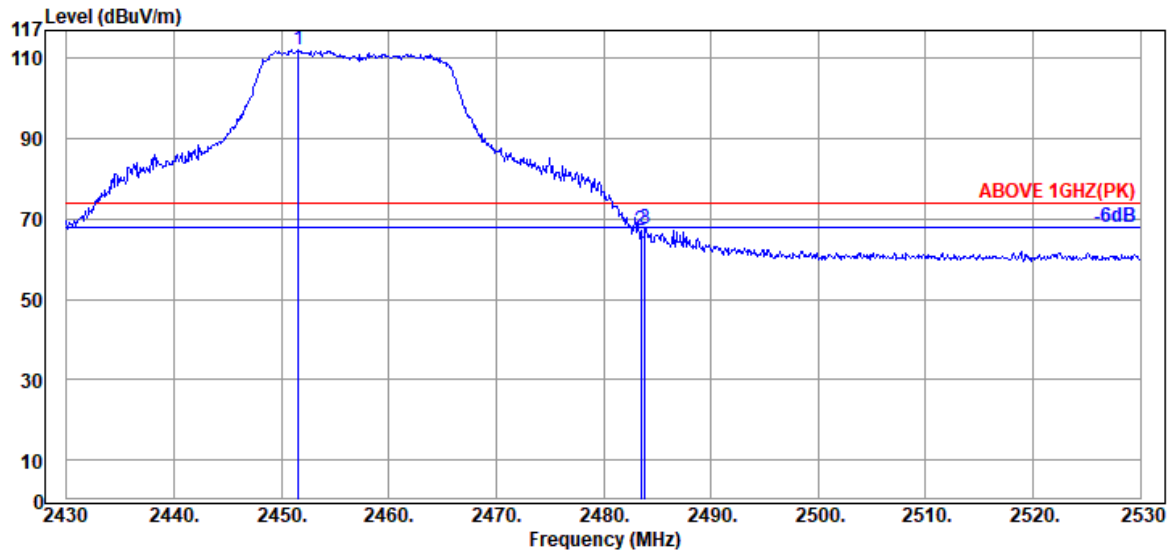

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2451.60	32.23	6.63	73.36	112.22	---	---	Peak
	2483.50	32.28	6.67	28.01	66.96	74.00	7.04	Peak
	2483.90	32.28	6.67	28.57	67.52	74.00	6.48	Peak

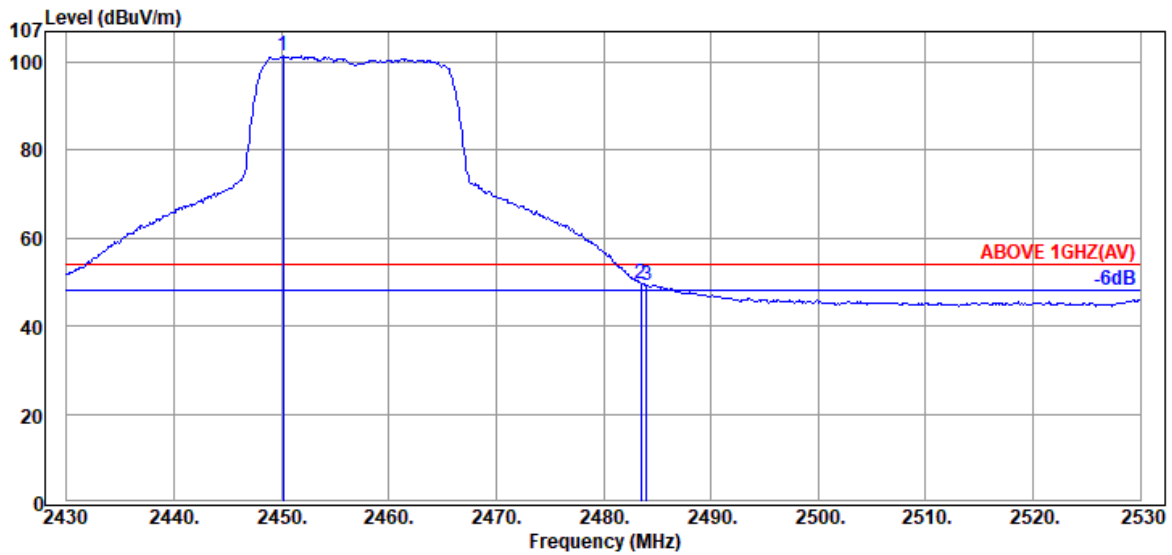


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2450.20	32.23	6.63	62.49	101.35	---	---	Average
	2483.50	32.28	6.67	10.77	49.72	54.00	4.28	Average
	2484.00	32.28	6.67	10.49	49.44	54.00	4.56	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

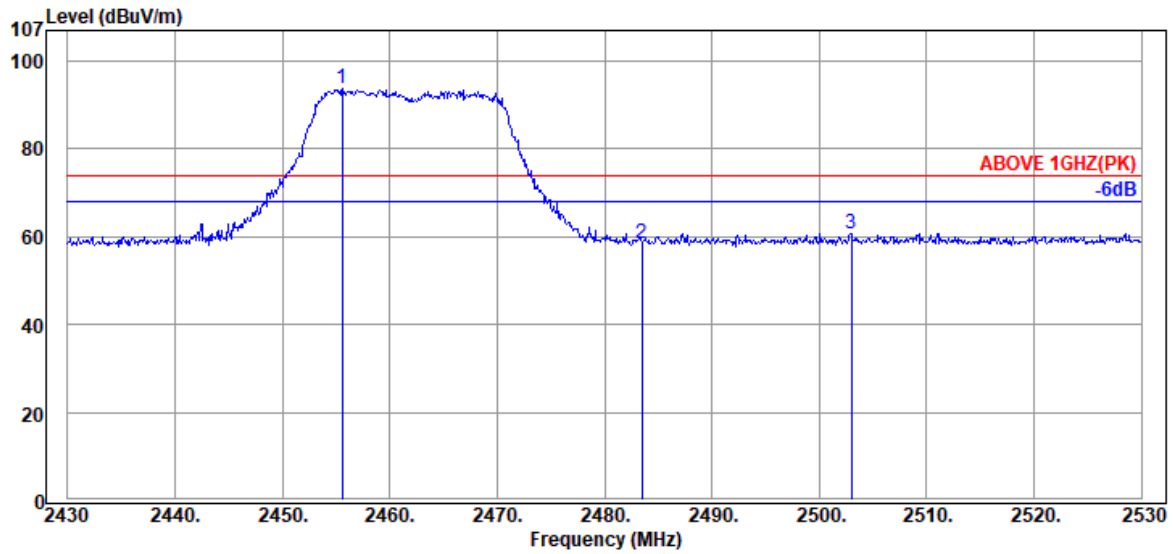

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.60	32.25	6.65	54.76	93.66	---	---	Peak
	2483.50	32.28	6.67	19.59	58.54	74.00	15.46	Peak
	2503.00	32.30	6.69	21.73	60.72	74.00	13.28	Peak

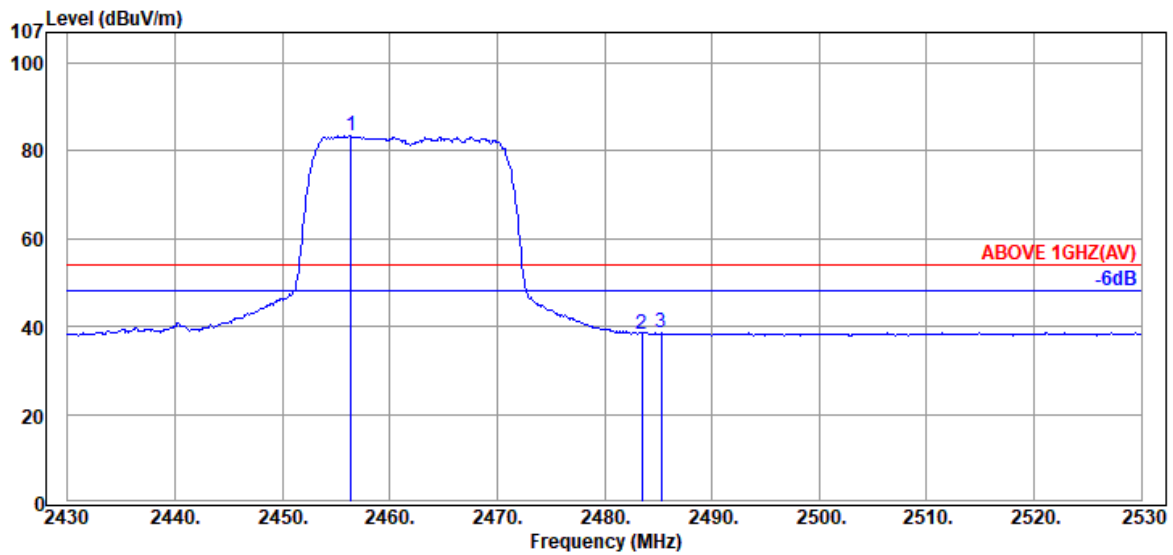


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.40	32.25	6.65	44.71	83.61	---	---	Average
	2483.50	32.28	6.67	-0.57	38.38	54.00	15.62	Average
	2485.30	32.28	6.67	-0.41	38.54	54.00	15.46	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

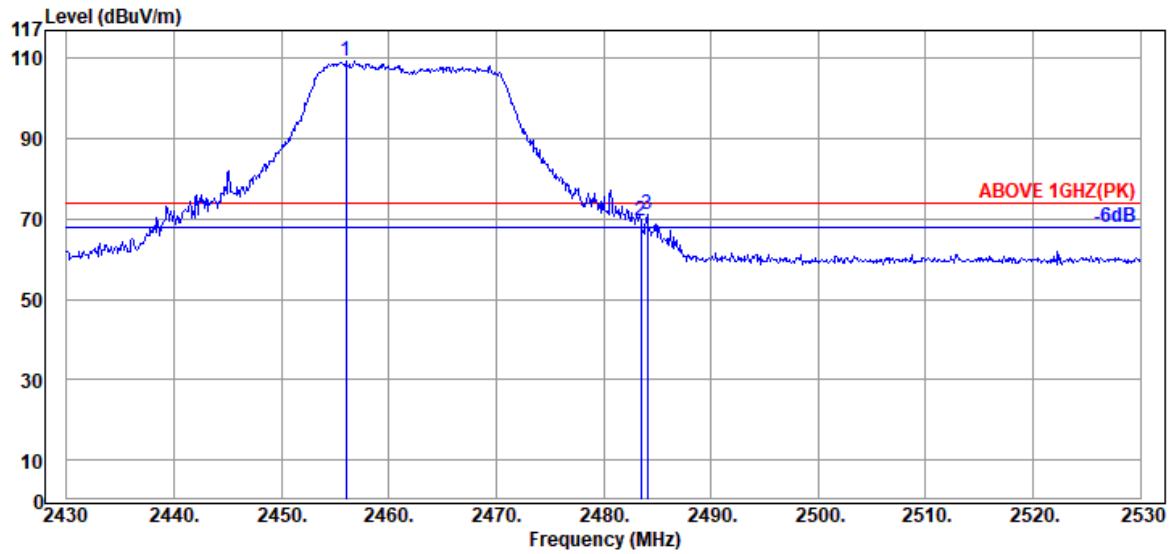

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.00	32.25	6.65	70.41	109.31	---	---	Peak
	2483.50	32.28	6.67	30.60	69.55	74.00	4.45	Peak
	2484.10	32.28	6.67	32.33	71.28	74.00	2.72	Peak

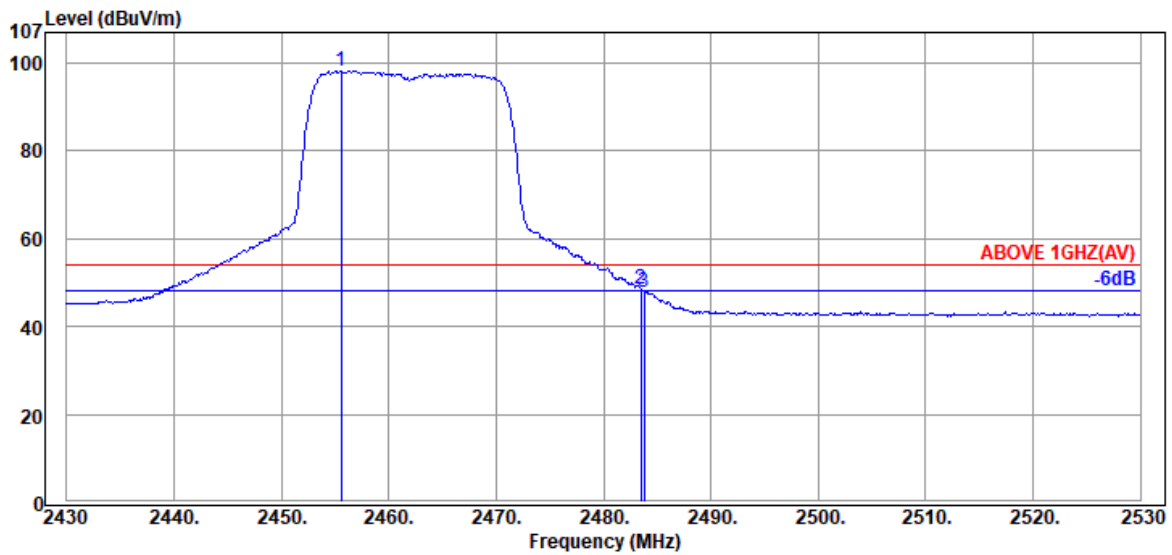


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.60	32.25	6.65	59.40	98.30	---	---	Average
	2483.50	32.28	6.67	9.57	48.52	54.00	5.48	Average
	2483.80	32.28	6.67	8.92	47.87	54.00	6.13	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

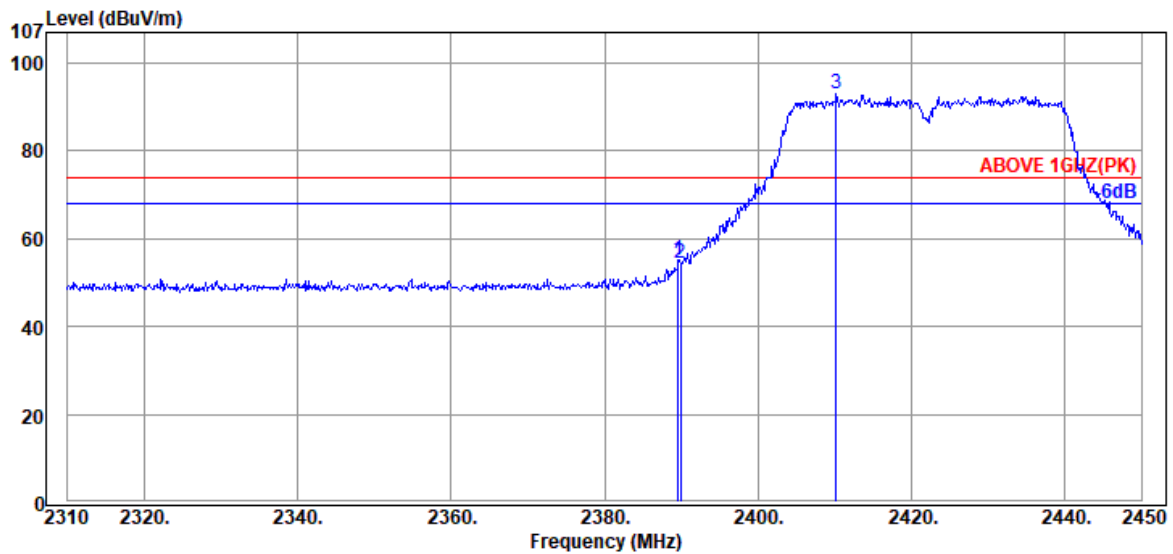

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.66	32.16	6.57	16.60	55.33	74.00	18.67	Peak
2389.94	32.16	6.57	15.71	54.44	74.00	19.56	Peak
@ 2410.24	32.18	6.59	54.20	92.97	---	---	Peak

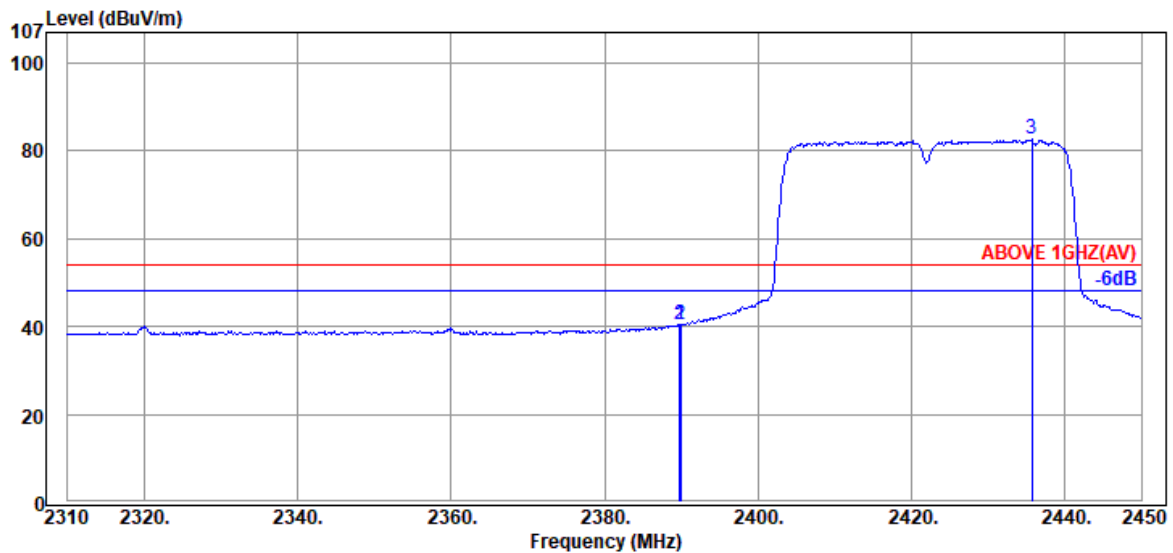


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.80	32.16	6.57	1.71	40.44	54.00	13.56	Average
2389.94	32.16	6.57	1.57	40.30	54.00	13.70	Average
@ 2435.72	32.20	6.61	43.79	82.60	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

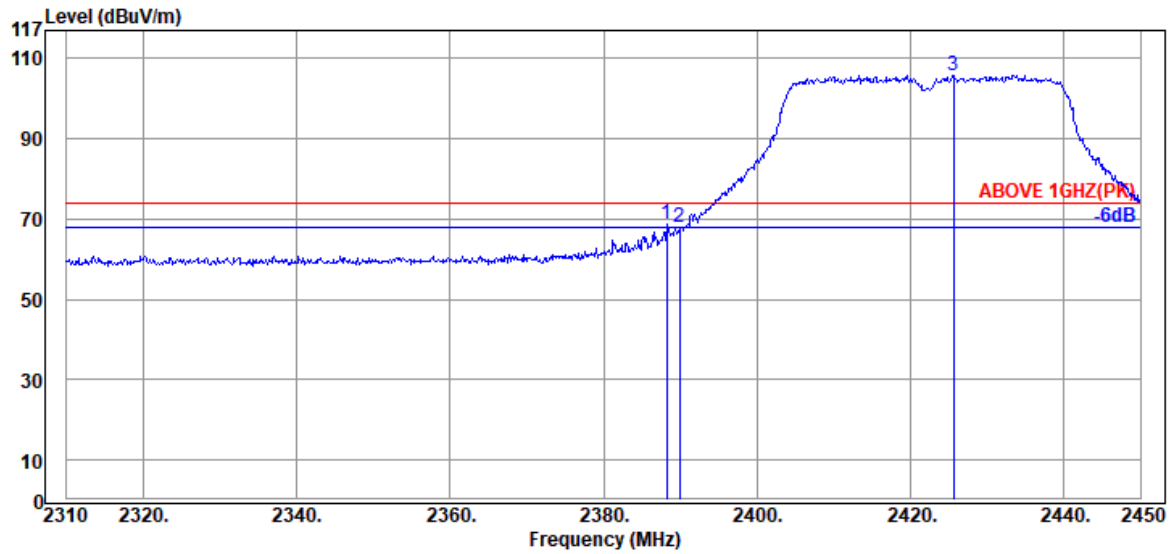

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.26	32.16	6.57	29.94	68.67	74.00	5.33	Peak
2389.94	32.16	6.57	29.05	67.78	74.00	6.22	Peak
@ 2425.64	32.20	6.61	67.04	105.85	---	---	Peak

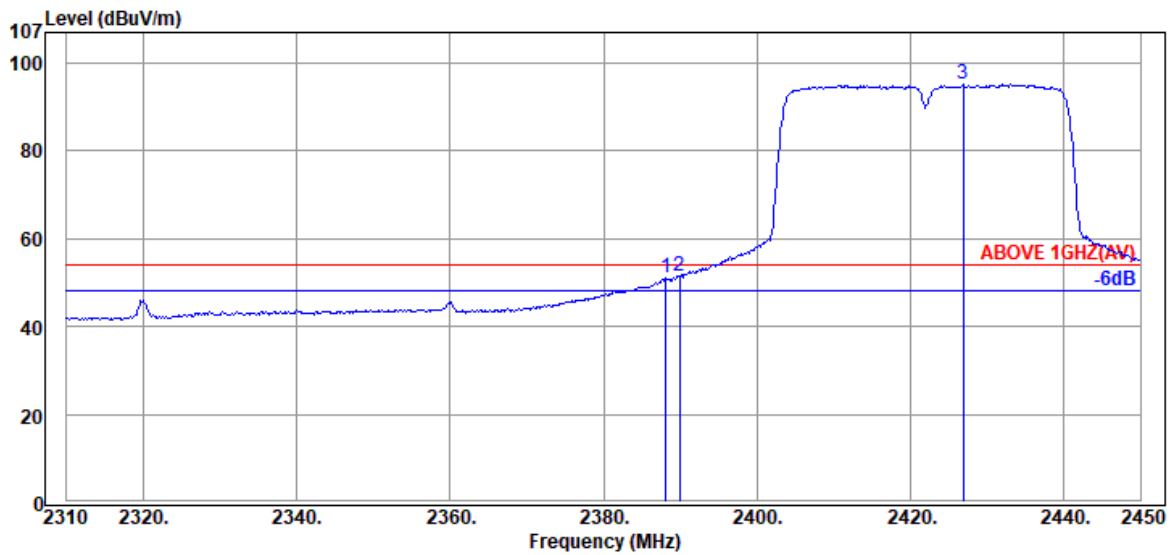


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.12	32.16	6.57	12.47	51.20	54.00	2.80	Average
2389.94	32.16	6.57	12.65	51.38	54.00	2.62	Average
@ 2426.90	32.20	6.61	56.42	95.23	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

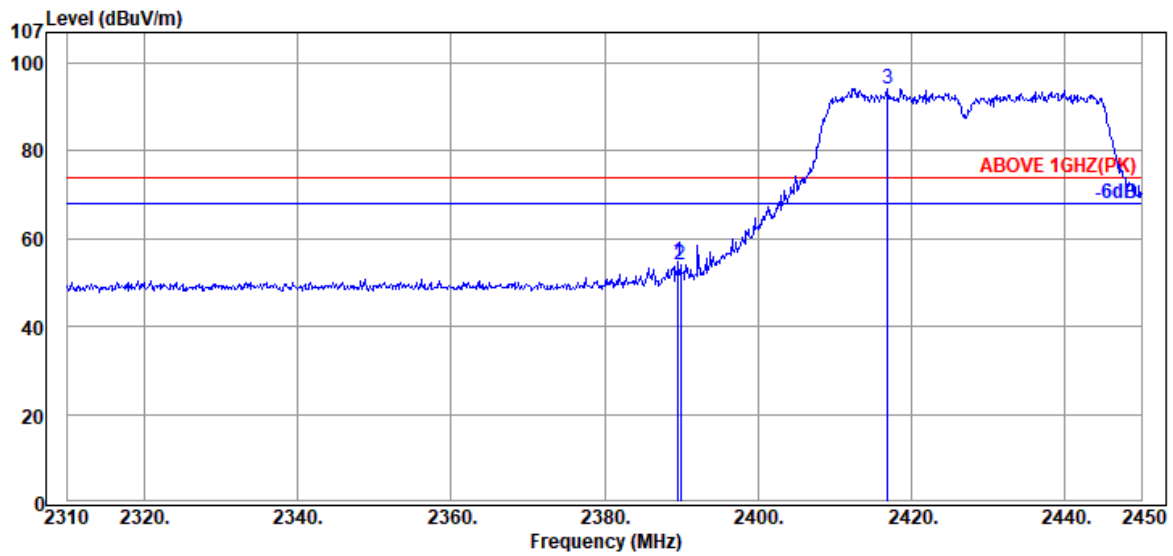

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.66	32.16	6.57	16.03	54.76	74.00	19.24	Peak
2389.94	32.16	6.57	15.40	54.13	74.00	19.87	Peak
@ 2416.96	32.18	6.59	55.51	94.28	---	---	Peak

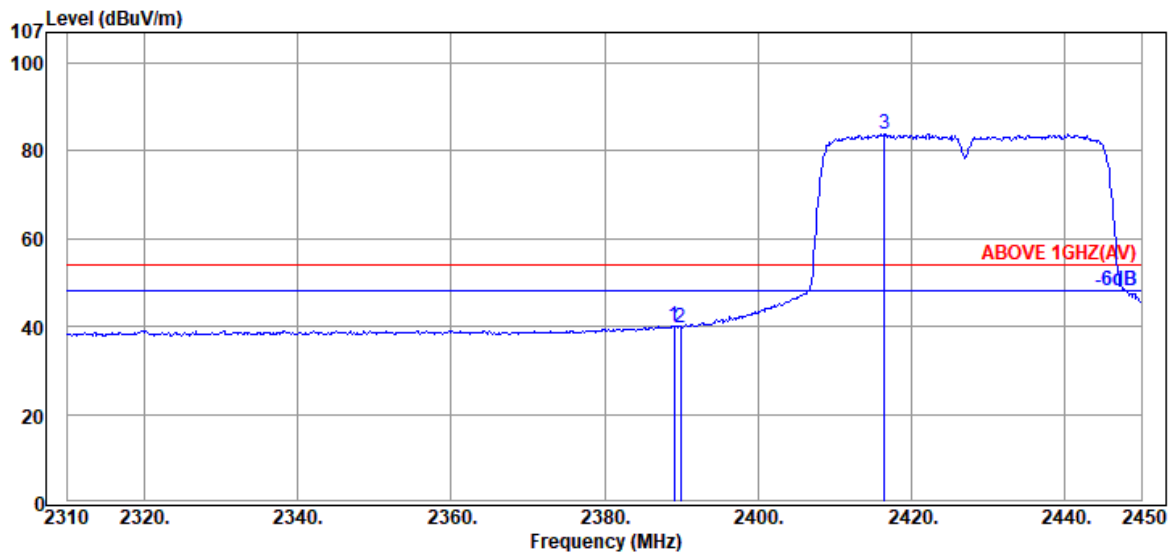


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.10	32.16	6.57	1.45	40.18	54.00	13.82	Average
2389.94	32.16	6.57	1.06	39.79	54.00	14.21	Average
@ 2416.54	32.18	6.59	45.04	83.81	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

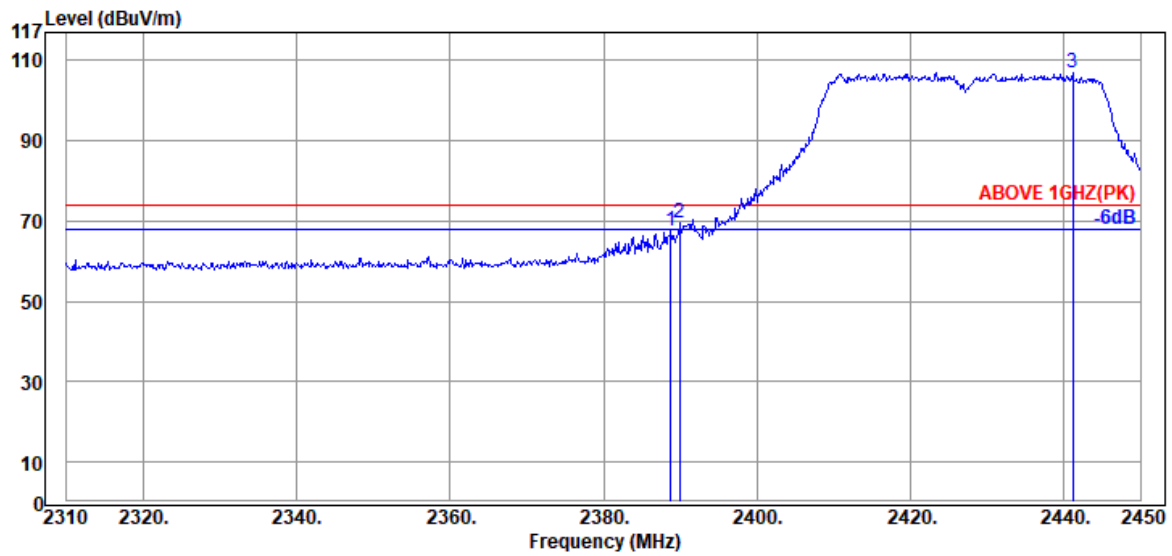

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.82	32.16	6.57	28.75	67.48	74.00	6.52	Peak
2389.94	32.16	6.57	30.65	69.38	74.00	4.62	Peak
@ 2441.18	32.23	6.63	68.06	106.92	---	---	Peak

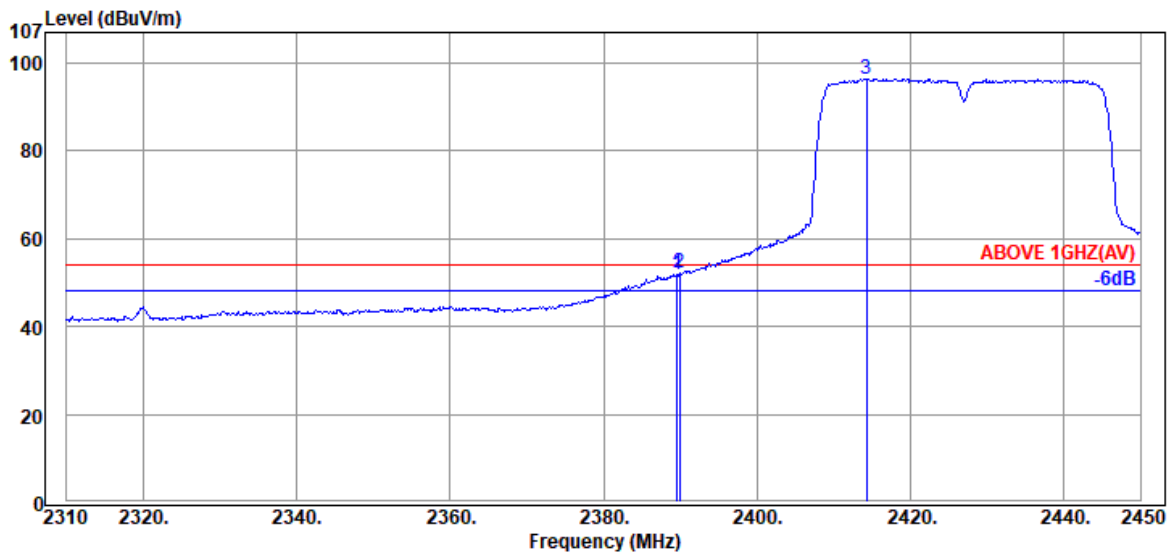


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.66	32.16	6.57	13.24	51.97	54.00	2.03	Average
2389.94	32.16	6.57	13.35	52.08	54.00	1.92	Average
@ 2414.30	32.18	6.59	57.67	96.44	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

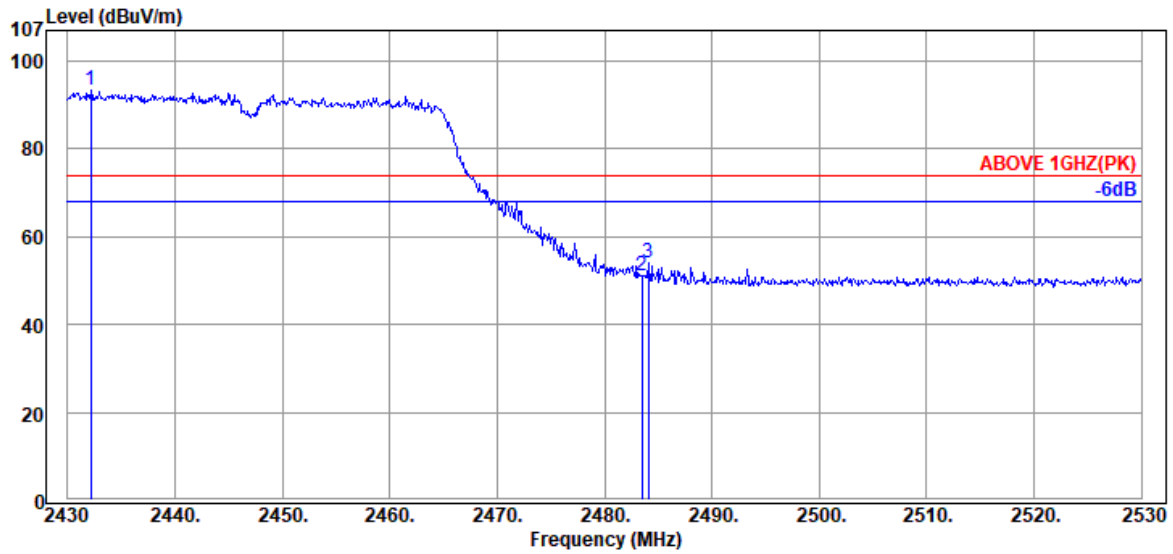

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2432.20	32.20	6.61	54.41	93.22	---	---	Peak
	2483.50	32.28	6.67	12.29	51.24	74.00	22.76	Peak
	2484.10	32.28	6.67	15.13	54.08	74.00	19.92	Peak

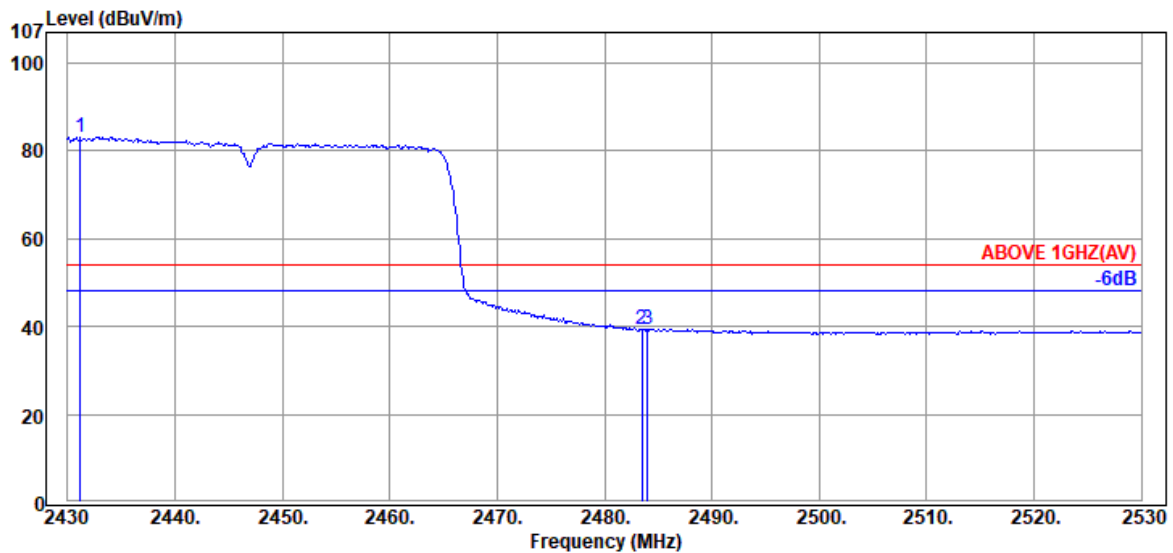


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2431.20	32.20	6.61	44.29	83.10	---	---	Average
	2483.50	32.28	6.67	0.40	39.35	54.00	14.65	Average
	2484.00	32.28	6.67	0.48	39.43	54.00	14.57	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

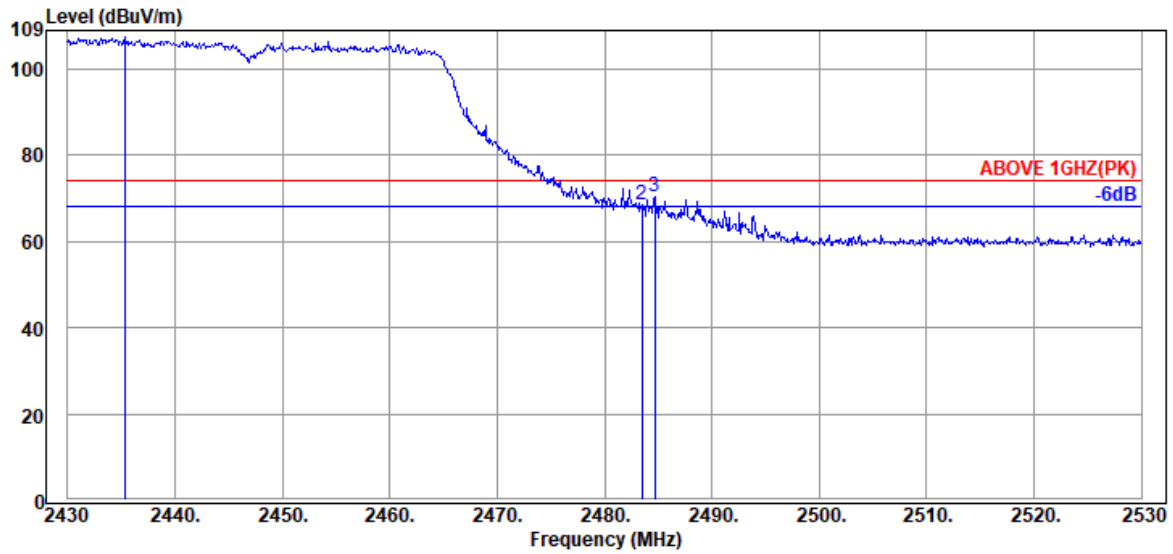

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2435.30	32.20	6.61	68.64	107.45	---	---	Peak
	2483.50	32.28	6.67	29.74	68.69	74.00	5.31	Peak
	2484.70	32.28	6.67	31.37	70.32	74.00	3.68	Peak

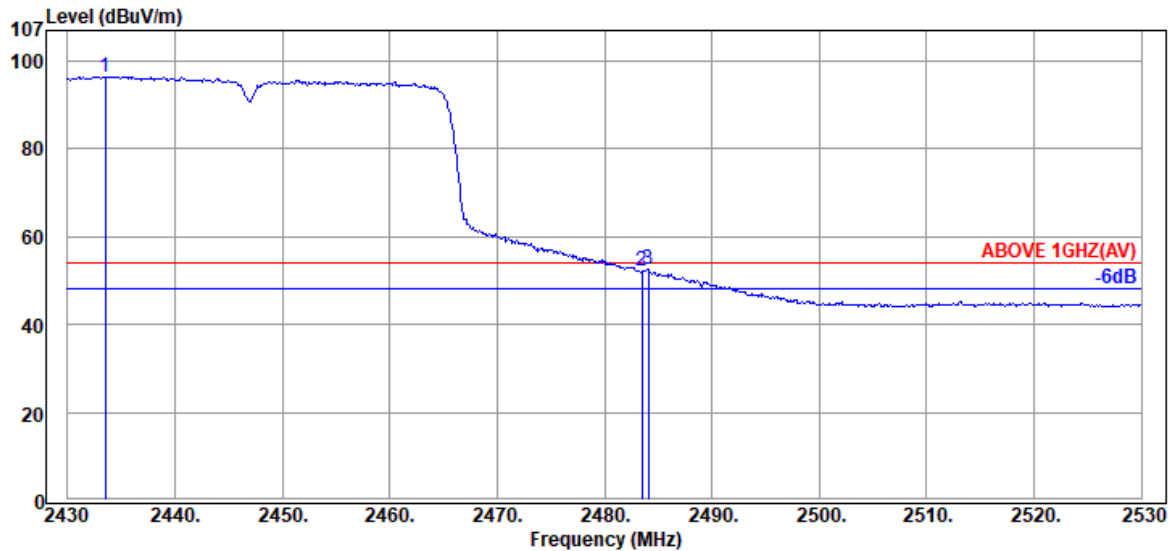


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2433.50	32.20	6.61	57.69	96.50	---	---	Average
	2483.50	32.28	6.67	13.28	52.23	54.00	1.77	Average
	2484.10	32.28	6.67	13.53	52.48	54.00	1.52	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

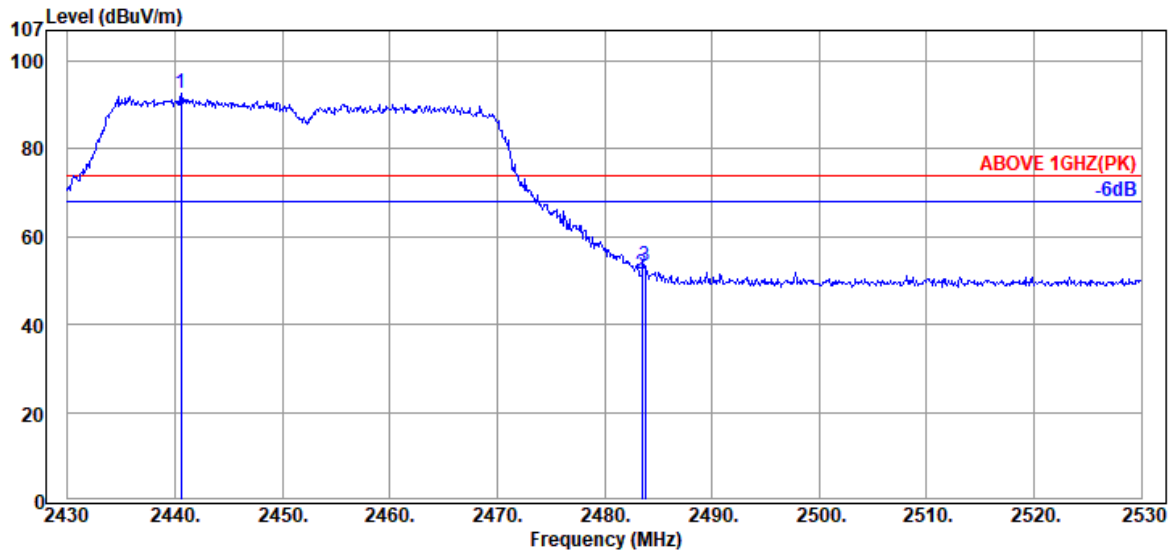

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2440.60	32.23	6.63	53.83	92.69	---	---	Peak
	2483.50	32.28	6.67	12.52	51.47	74.00	22.53	Peak
	2483.80	32.28	6.67	14.52	53.47	74.00	20.53	Peak

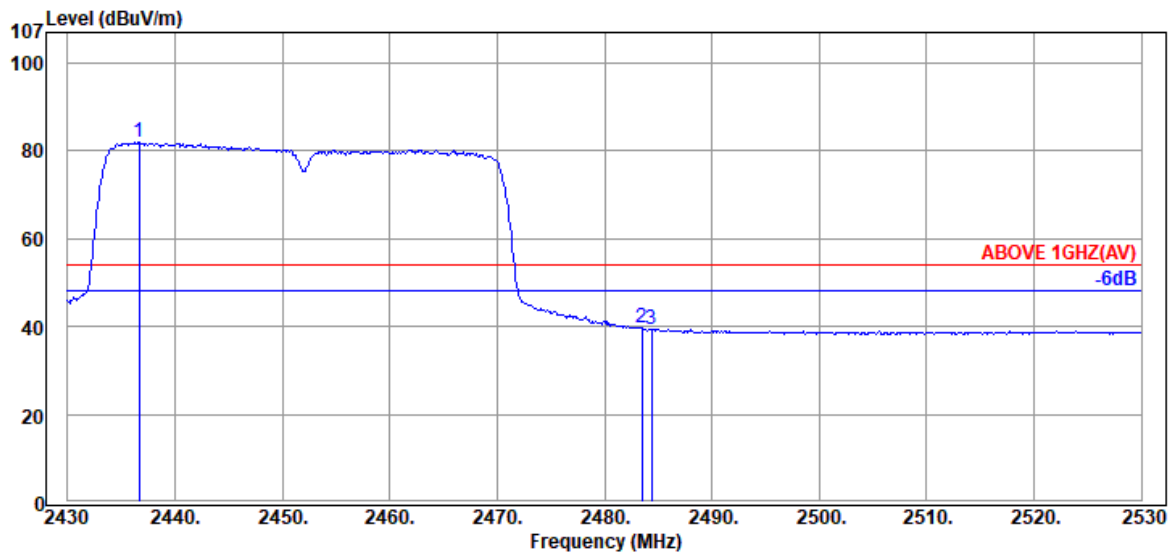


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2436.70	32.23	6.63	43.32	82.18	---	---	Average
	2483.50	32.28	6.67	0.65	39.60	54.00	14.40	Average
	2484.40	32.28	6.67	0.47	39.42	54.00	14.58	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

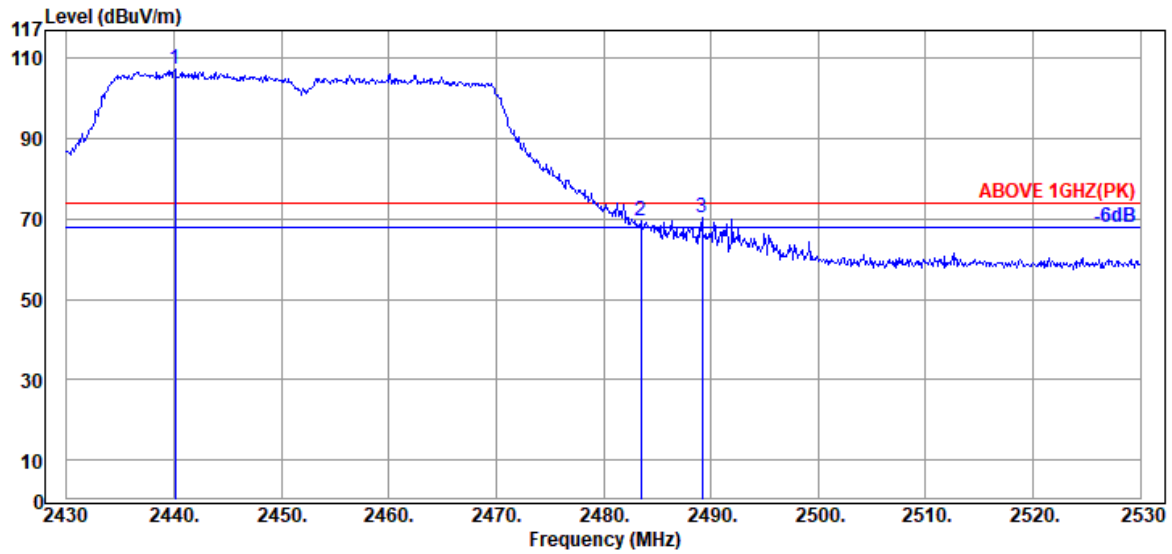

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2440.10	32.23	6.63	68.43	107.29	---	---	Peak
	2483.50	32.28	6.67	30.47	69.42	74.00	4.58	Peak
	2489.20	32.30	6.69	31.37	70.36	74.00	3.64	Peak

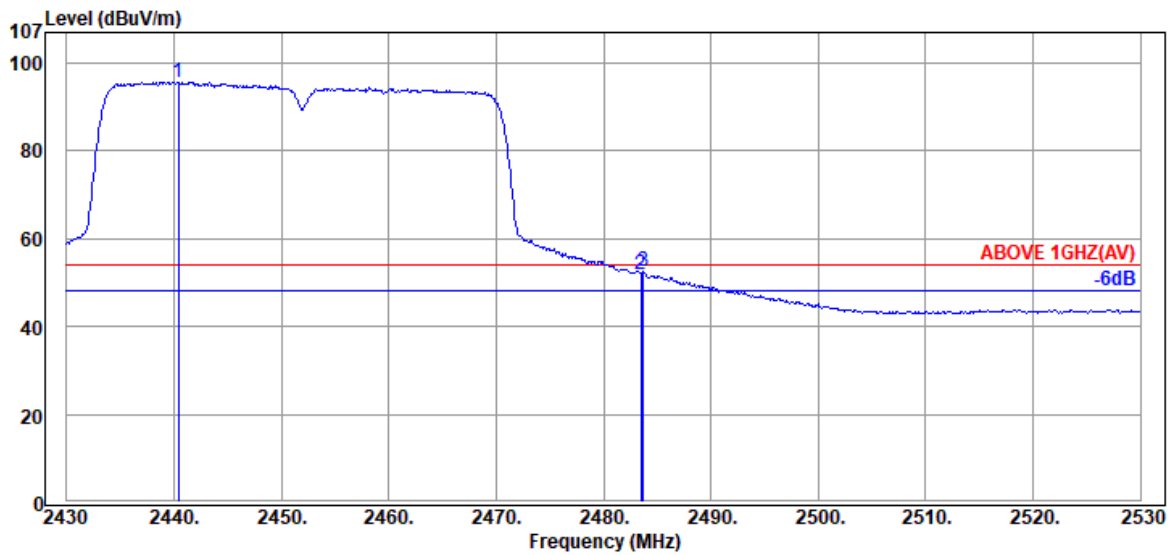


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2440.40	32.23	6.63	56.92	95.78	---	---	Average
	2483.50	32.28	6.67	13.02	51.97	54.00	2.03	Average
	2483.70	32.28	6.67	13.59	52.54	54.00	1.46	Average

備註：“@”為主波，在此章節是不予以判定。


● No. 15 Omni Antenna (M/N ANT795-6MT)

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

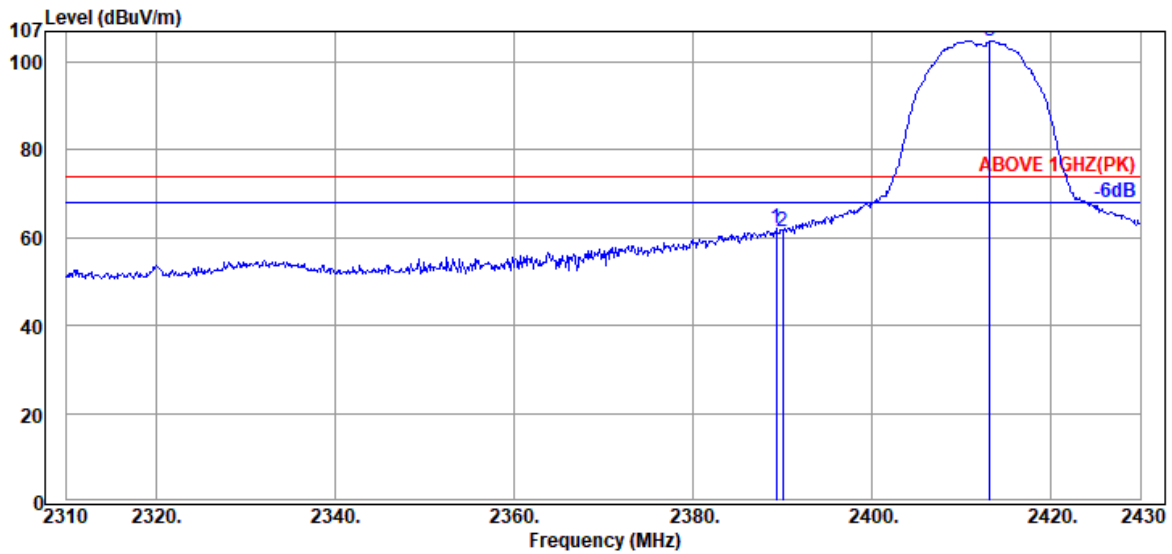

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	32.16	6.57	23.40	62.13	74.00	11.87	Peak
2390.04	32.16	6.57	22.73	61.46	74.00	12.54	Peak
@ 2413.20	32.18	6.59	66.02	104.79	---	---	Peak

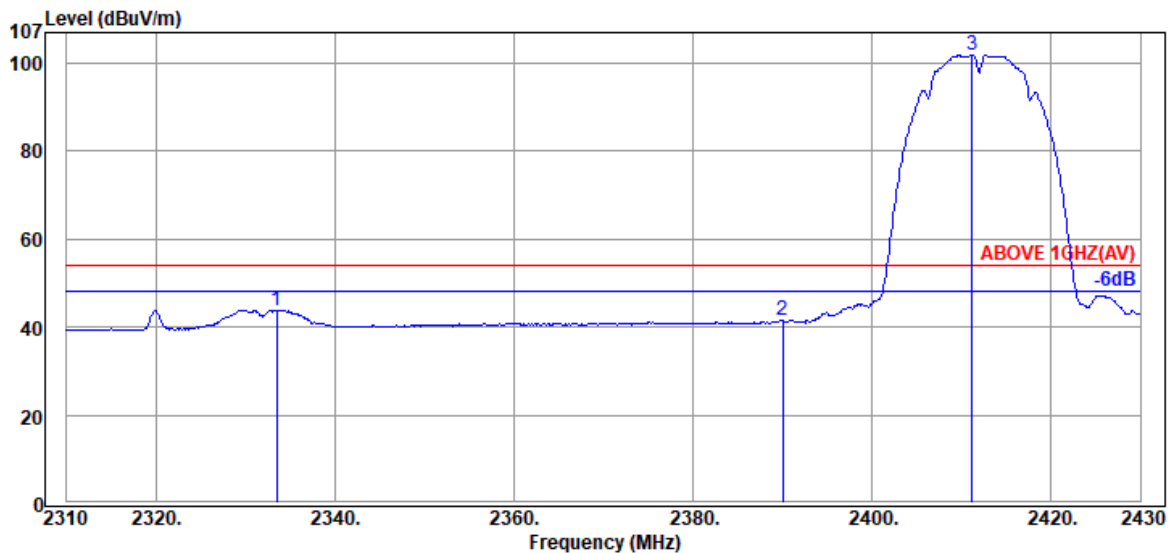


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2333.52	32.06	6.49	5.36	43.91	54.00	10.09	Average
2390.04	32.16	6.57	2.67	41.40	54.00	12.60	Average
@ 2411.16	32.18	6.59	63.24	102.01	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

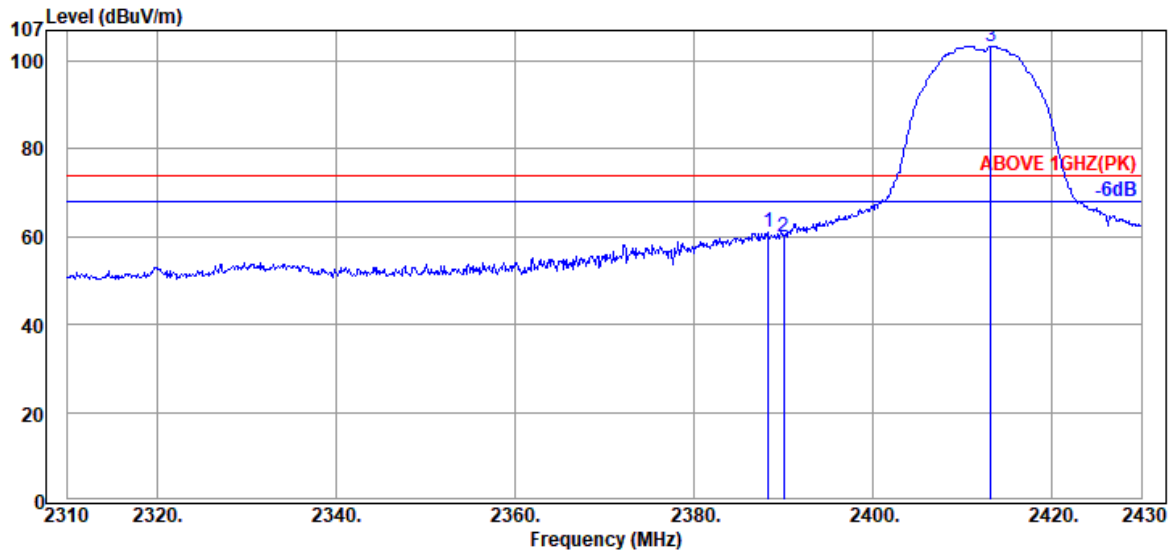

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.36	32.16	6.57	22.36	61.09	74.00	12.91	Peak
2390.04	32.16	6.57	21.35	60.08	74.00	13.92	Peak
@ 2413.20	32.18	6.59	64.64	103.41	---	---	Peak

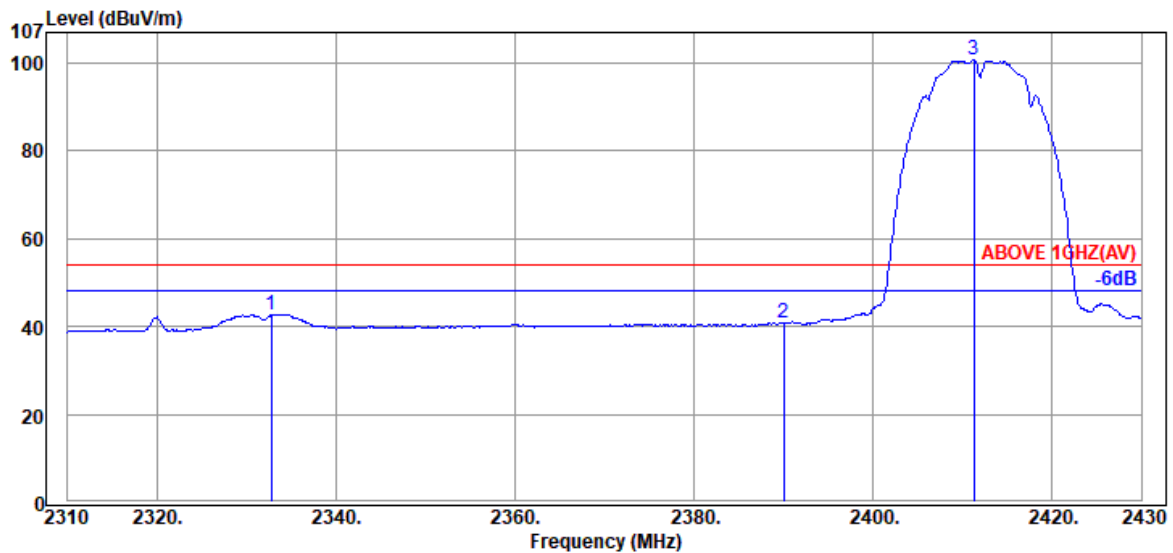


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2332.80	32.06	6.49	4.28	42.83	54.00	11.17	Average
2390.04	32.16	6.57	2.04	40.77	54.00	13.23	Average
@ 2411.28	32.18	6.59	61.94	100.71	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

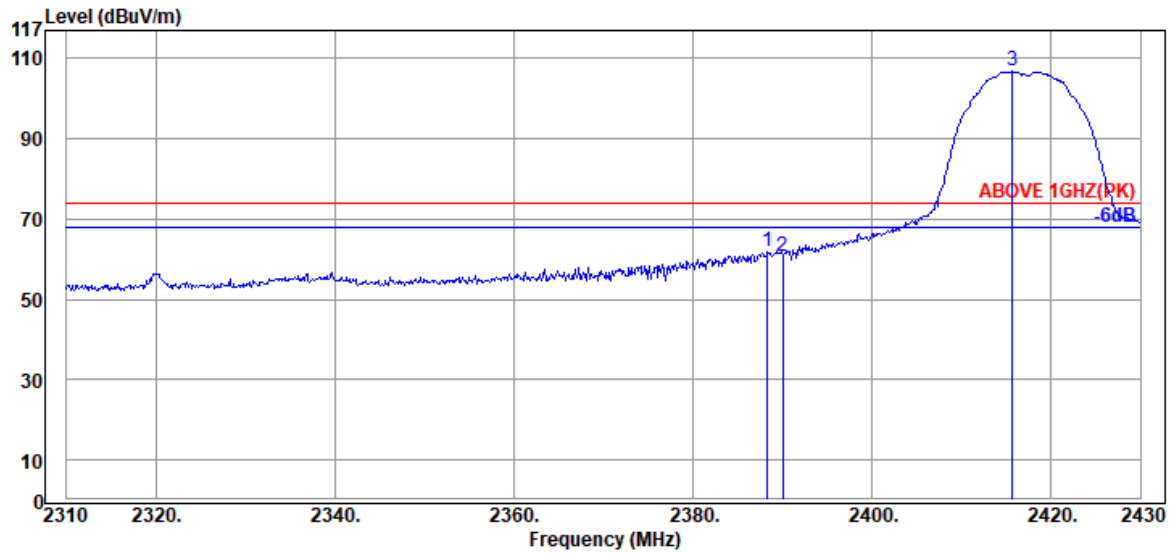

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.36	32.16	6.57	23.29	62.02	74.00	11.98	Peak
2390.04	32.16	6.57	21.86	60.59	74.00	13.41	Peak
@ 2415.72	32.18	6.59	67.99	106.76	---	---	Peak

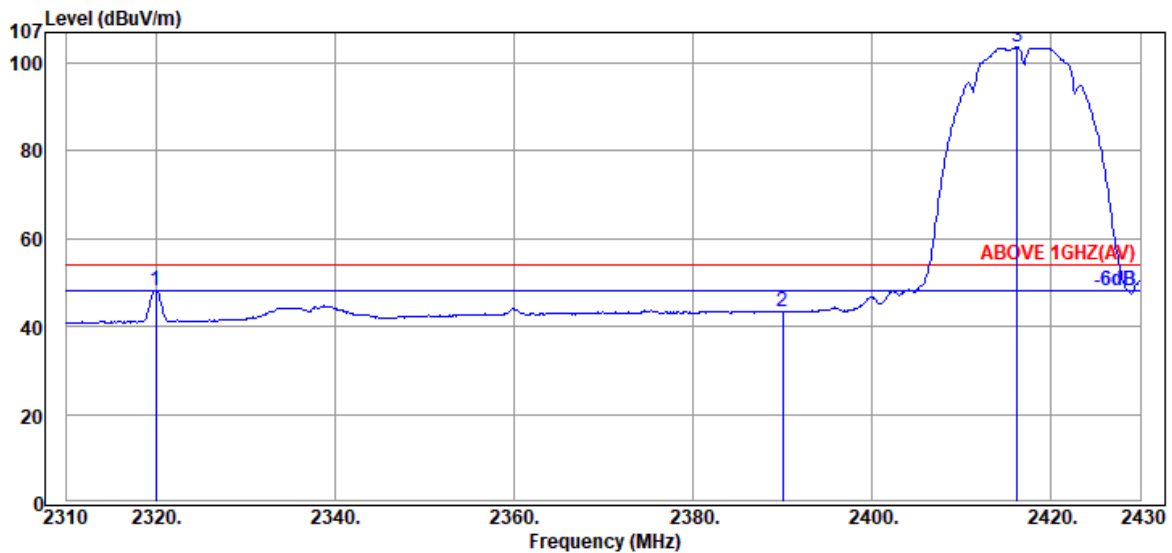


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2319.96	32.06	6.49	9.80	48.35	54.00	5.65	Average
2390.04	32.16	6.57	4.64	43.37	54.00	10.63	Average
@ 2416.20	32.18	6.59	64.86	103.63	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

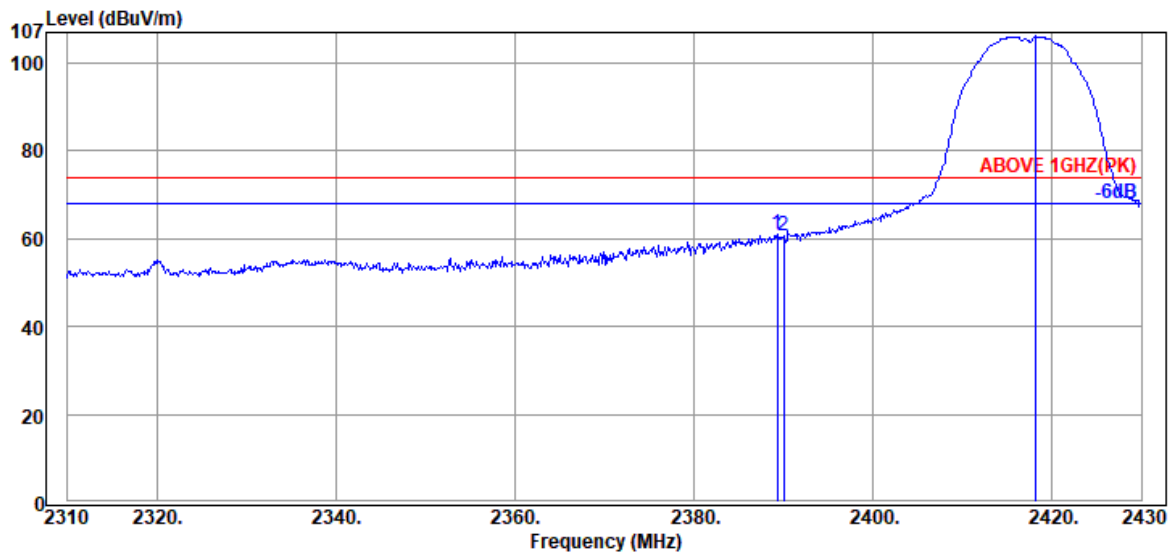

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	32.16	6.57	22.22	60.95	74.00	13.05	Peak
2390.04	32.16	6.57	22.01	60.74	74.00	13.26	Peak
@ 2418.24	32.18	6.59	67.33	106.10	---	---	Peak

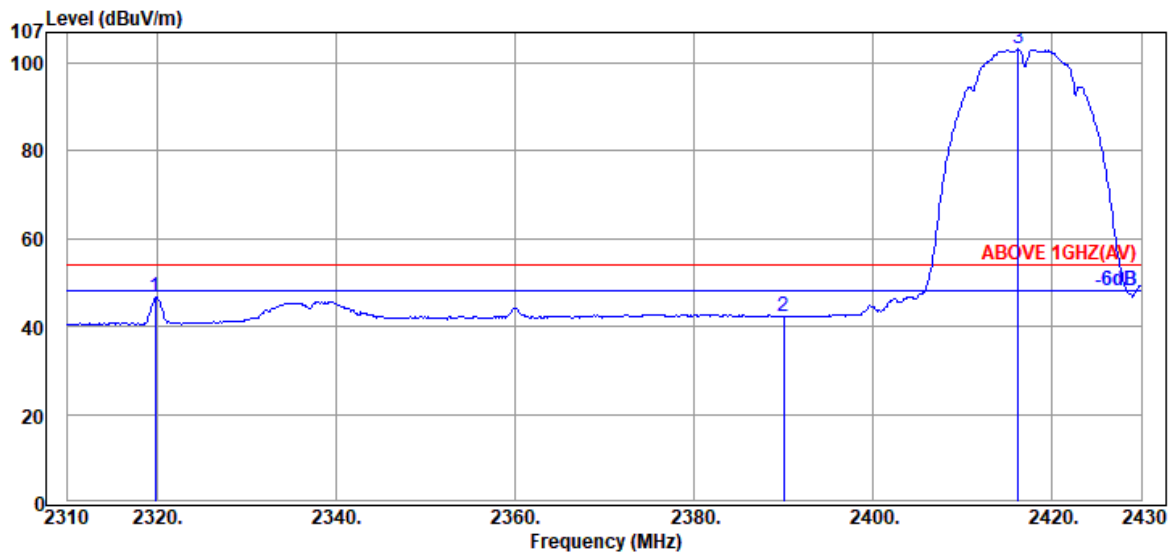


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2319.84	32.06	6.49	8.01	46.56	54.00	7.44	Average
2390.04	32.16	6.57	3.69	42.42	54.00	11.58	Average
@ 2416.20	32.18	6.59	64.38	103.15	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

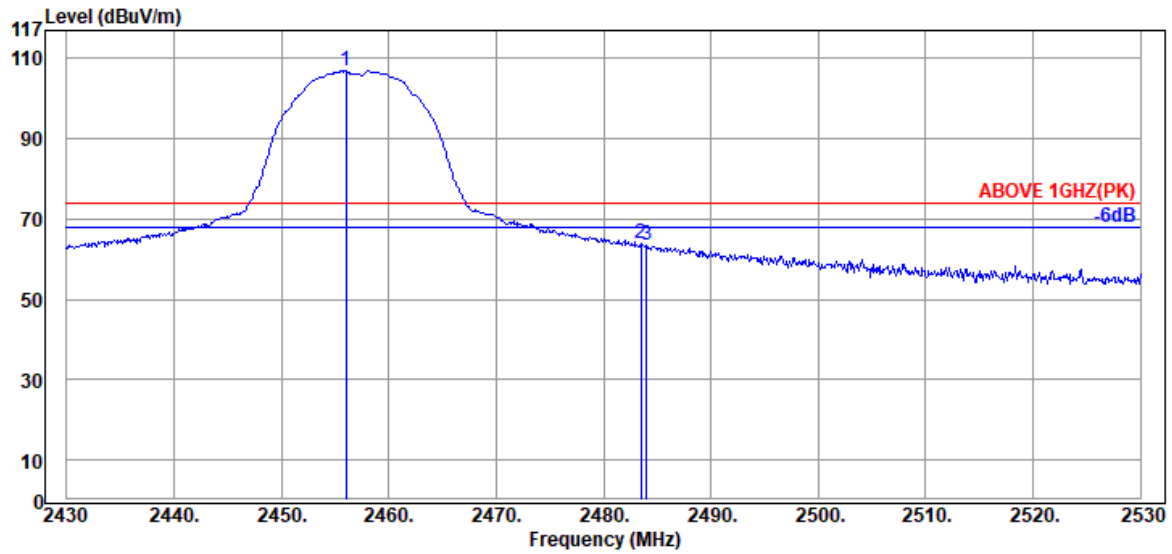

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.00	32.25	6.65	67.91	106.81	---	---	Peak
	2483.50	32.28	6.67	24.83	63.78	74.00	10.22	Peak
	2484.00	32.28	6.67	24.38	63.33	74.00	10.67	Peak

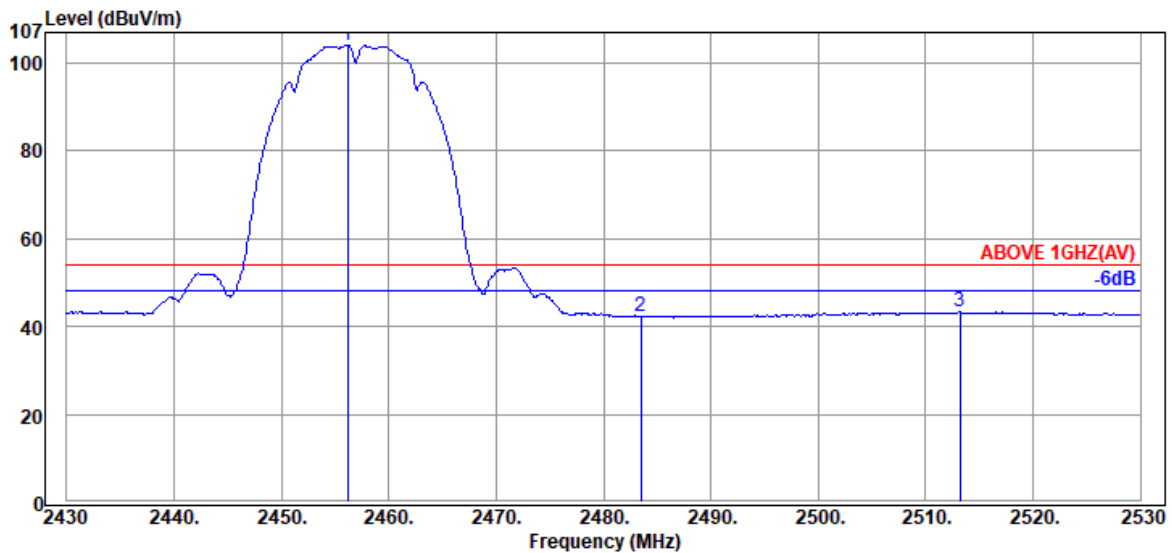


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.20	32.25	6.65	65.24	104.14	---	---	Average
	2483.50	32.28	6.67	3.38	42.33	54.00	11.67	Average
	2513.20	32.32	6.72	4.30	43.34	54.00	10.66	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

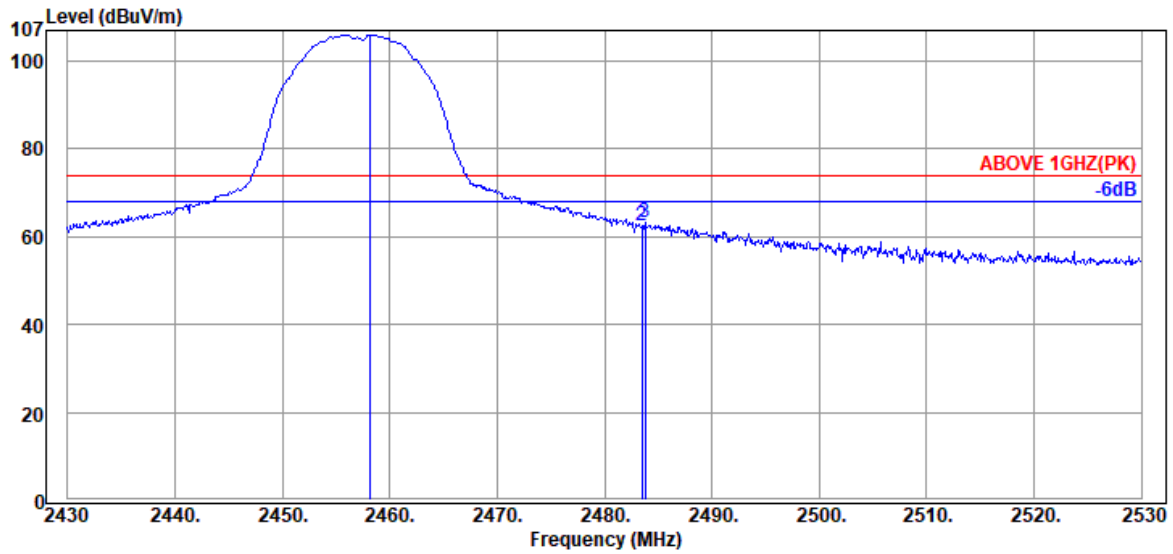

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.10	32.25	6.65	67.07	105.97	---	---	Peak
	2483.50	32.28	6.67	23.57	62.52	74.00	11.48	Peak
	2483.80	32.28	6.67	24.13	63.08	74.00	10.92	Peak

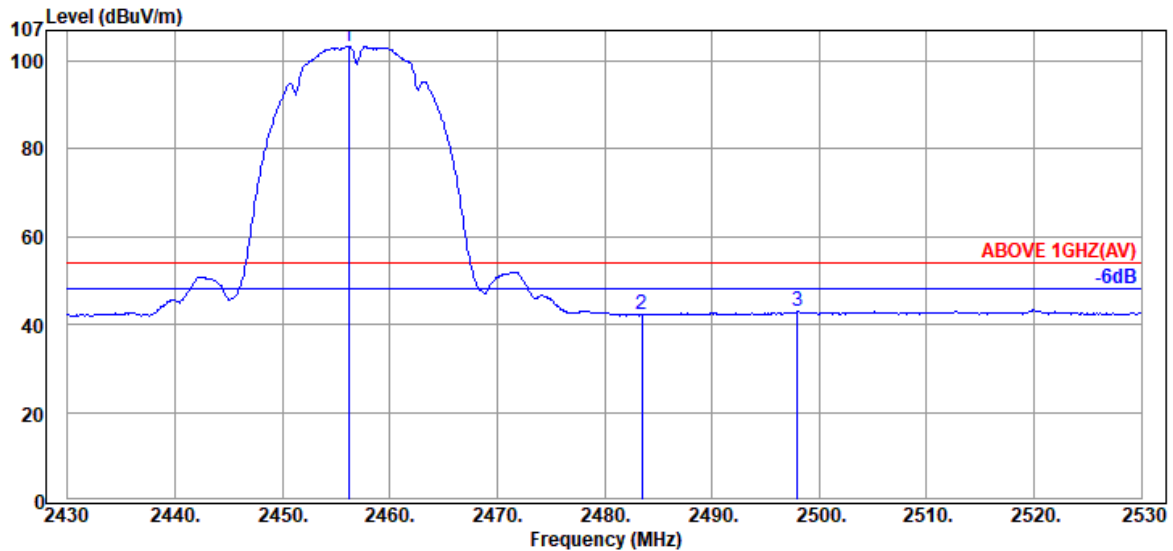


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.20	32.25	6.65	64.55	103.45	---	---	Average
	2483.50	32.28	6.67	3.20	42.15	54.00	11.85	Average
	2498.00	32.30	6.69	3.94	42.93	54.00	11.07	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

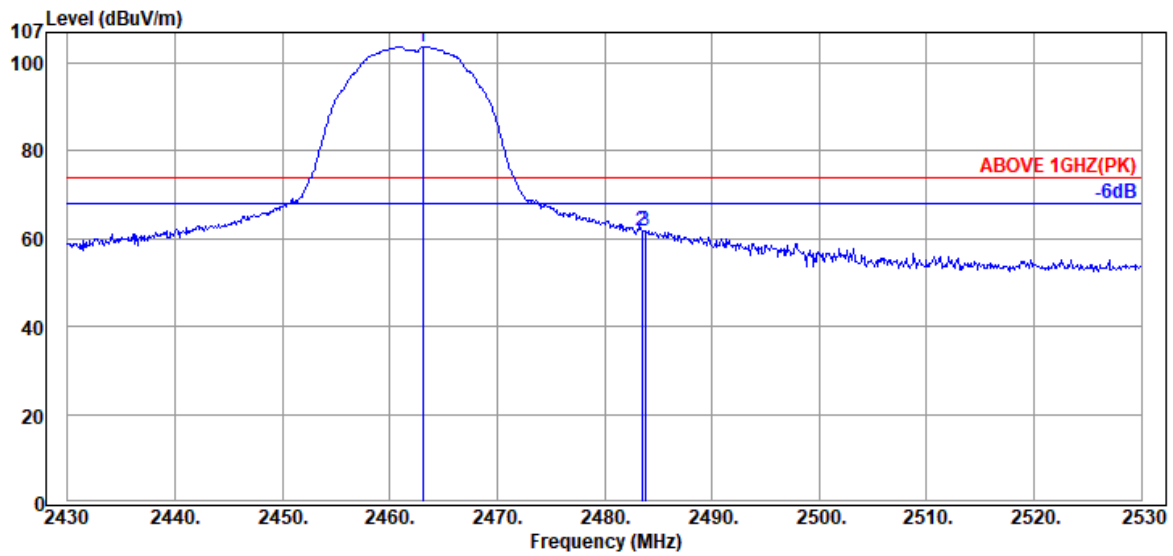

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.10	32.25	6.65	64.84	103.74	---	---	Peak
	2483.50	32.28	6.67	22.86	61.81	74.00	12.19	Peak
	2483.80	32.28	6.67	22.95	61.90	74.00	12.10	Peak

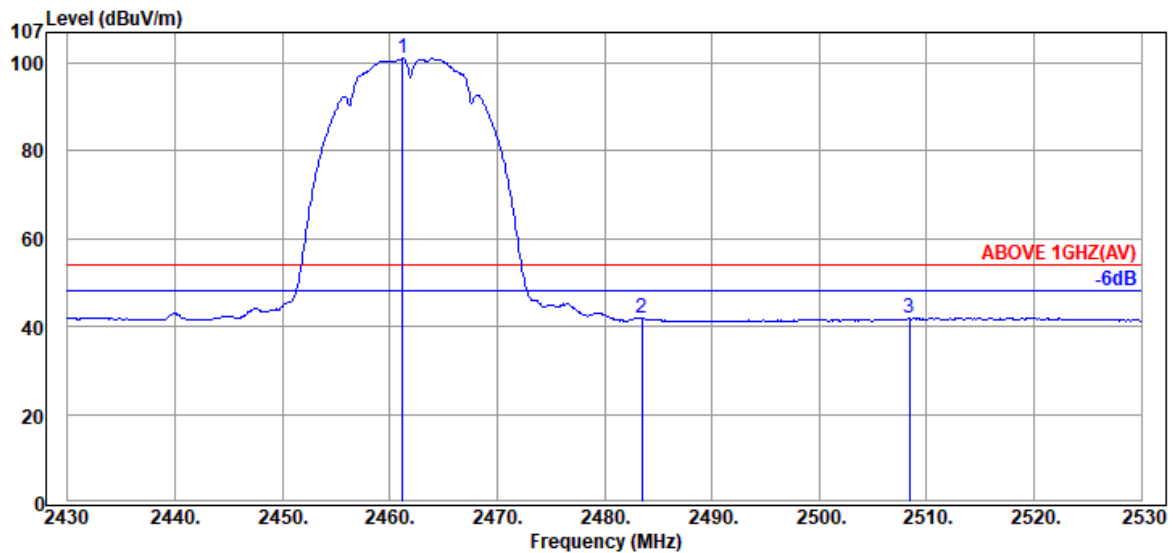


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.20	32.25	6.65	62.12	101.02	---	---	Average
	2483.50	32.28	6.67	2.80	41.75	54.00	12.25	Average
	2508.40	32.32	6.72	2.97	42.01	54.00	11.99	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

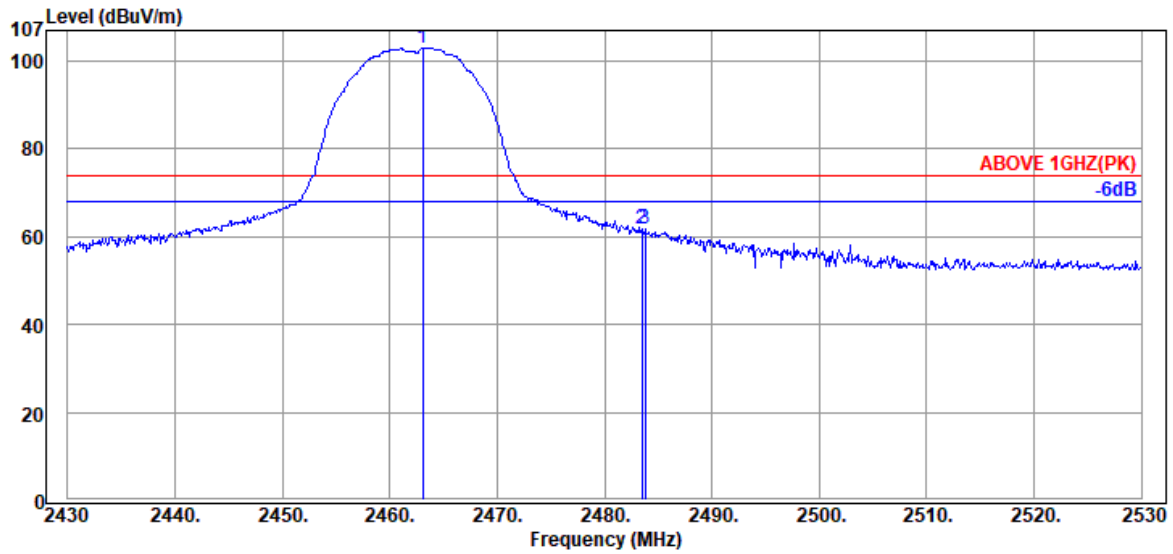

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.10	32.25	6.65	64.16	103.06	---	---	Peak
	2483.50	32.28	6.67	22.85	61.80	74.00	12.20	Peak
	2483.80	32.28	6.67	22.73	61.68	74.00	12.32	Peak

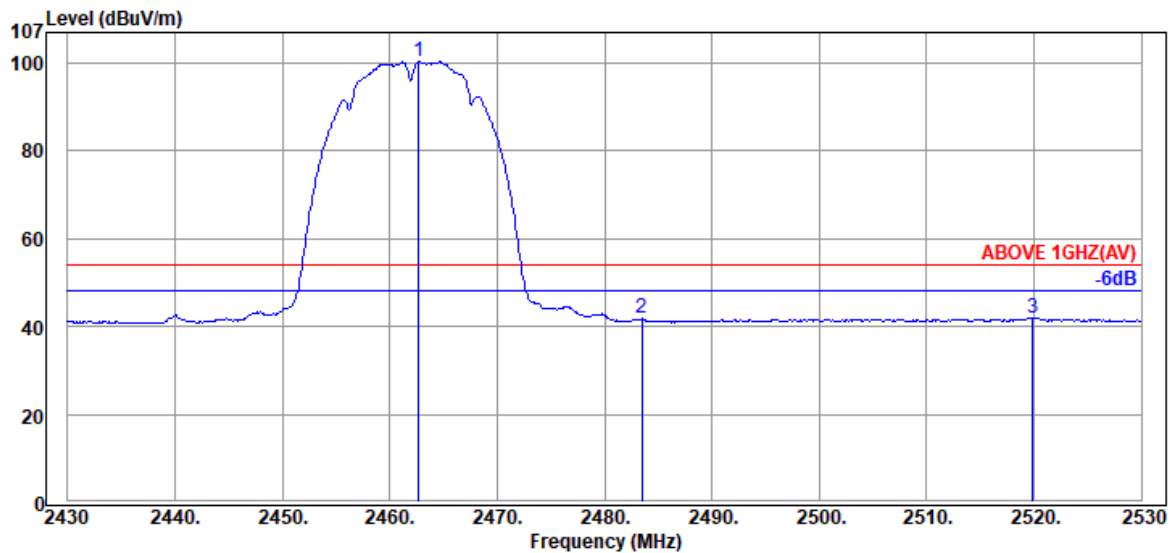


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.70	32.25	6.65	61.32	100.22	---	---	Average
	2483.50	32.28	6.67	2.80	41.75	54.00	12.25	Average
	2519.90	32.32	6.72	3.00	42.04	54.00	11.96	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

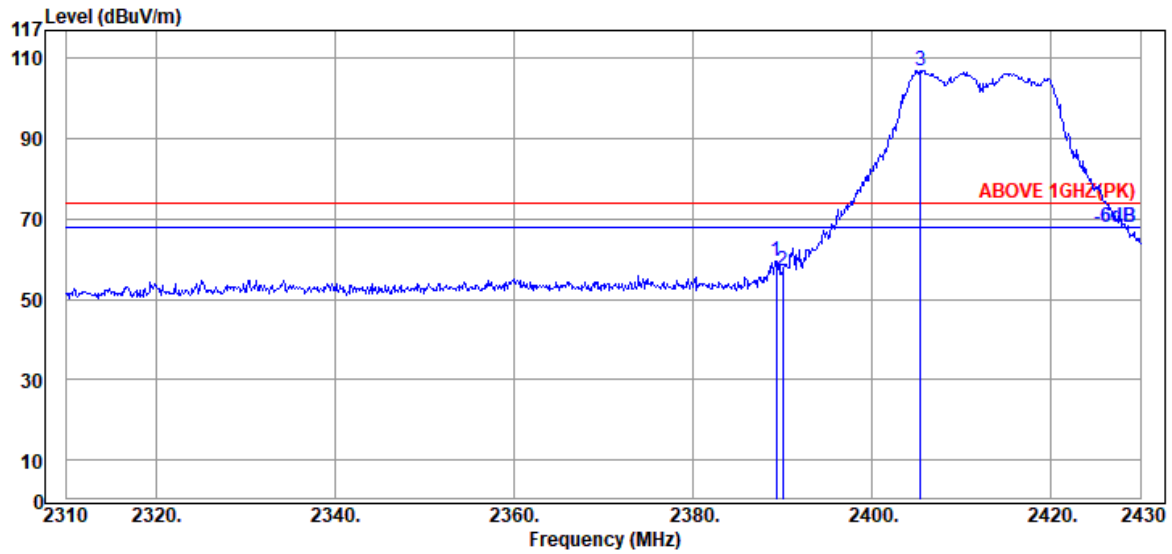

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	32.16	6.57	20.95	59.68	74.00	14.32	Peak
2390.04	32.16	6.57	18.47	57.20	74.00	16.80	Peak
@ 2405.40	32.18	6.59	68.22	106.99	---	---	Peak

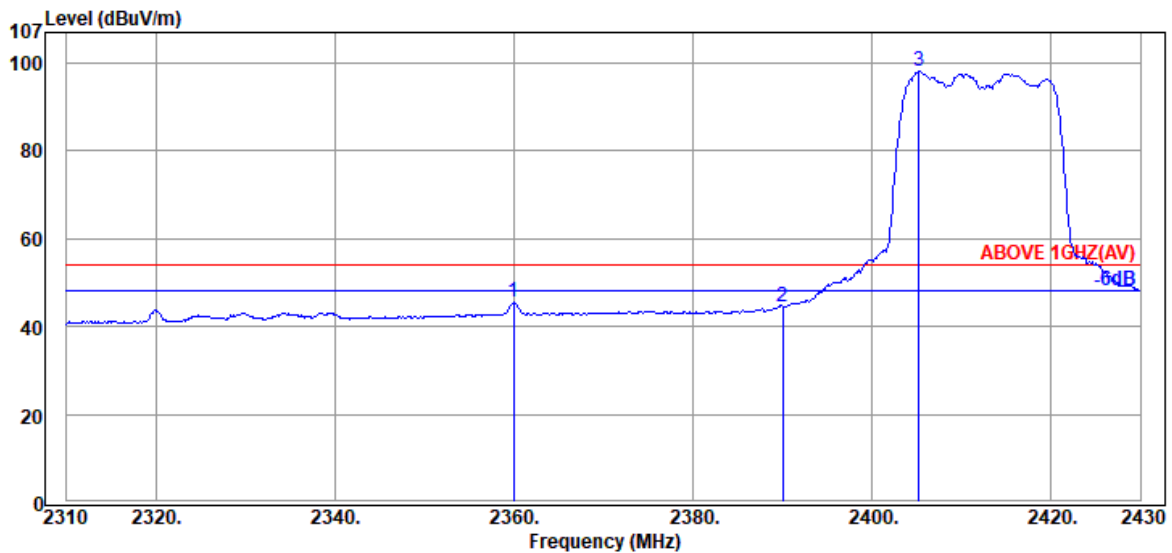


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2359.92	32.11	6.53	6.84	45.48	54.00	8.52	Average
2390.04	32.16	6.57	5.60	44.33	54.00	9.67	Average
@ 2405.28	32.18	6.59	59.33	98.10	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

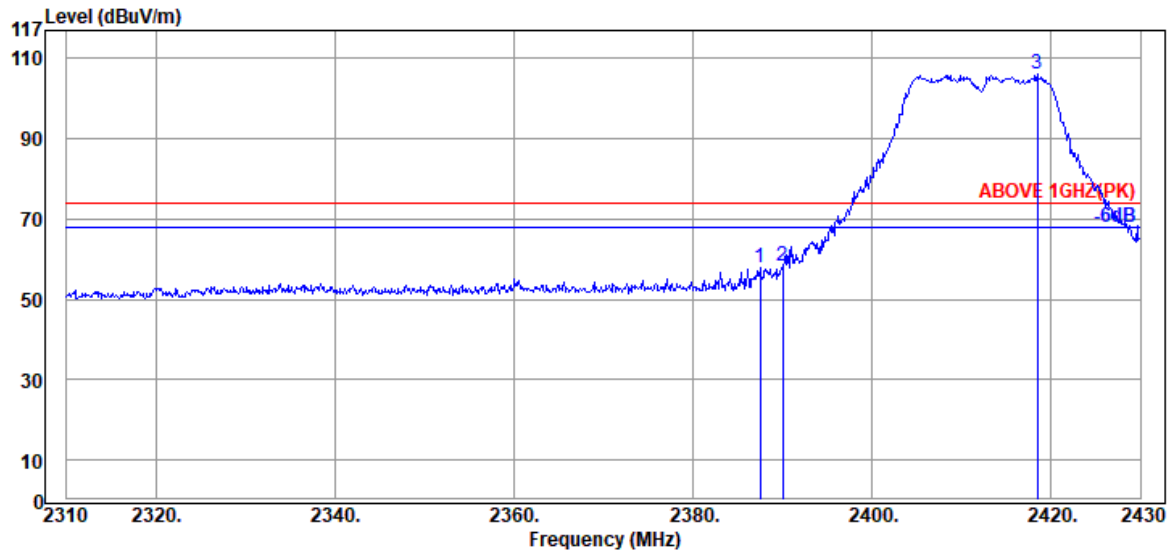

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.52	32.16	6.57	19.03	57.76	74.00	16.24	Peak
2390.04	32.16	6.57	19.49	58.22	74.00	15.78	Peak
@ 2418.48	32.18	6.59	67.22	105.99	---	---	Peak

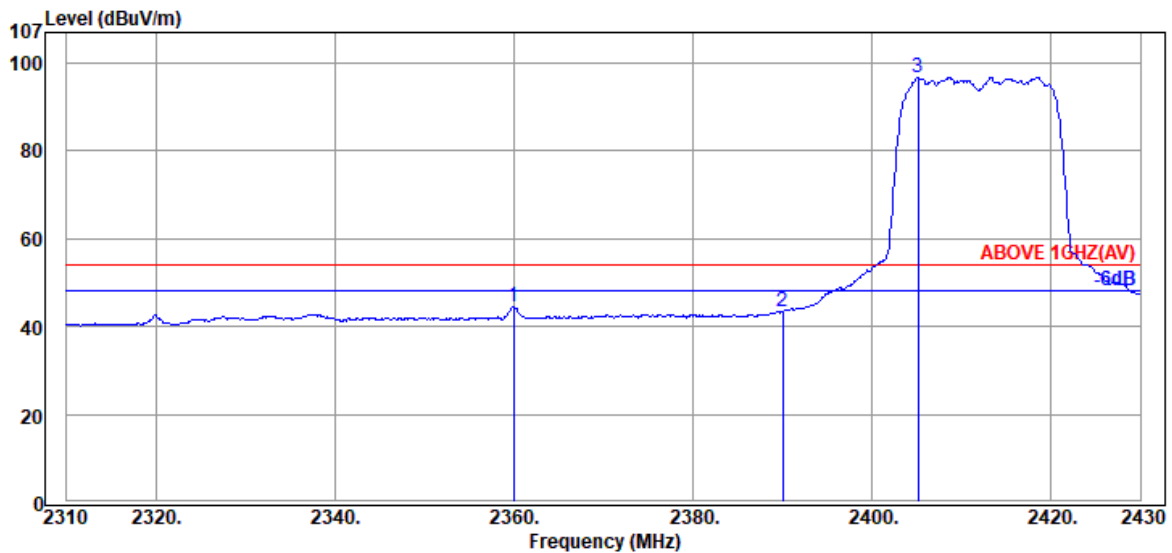


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2359.92	32.11	6.53	5.85	44.49	54.00	9.51	Average
2390.04	32.16	6.57	4.77	43.50	54.00	10.50	Average
@ 2405.16	32.18	6.59	58.01	96.78	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

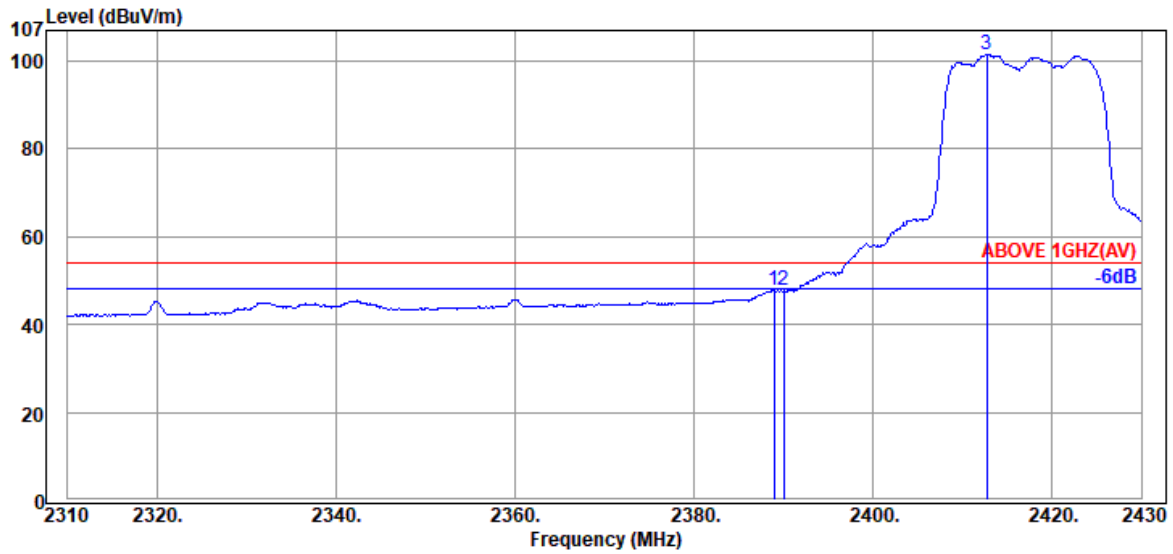

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.40	32.16	6.57	27.14	65.87	74.00	8.13	Peak
2390.04	32.16	6.57	23.80	62.53	74.00	11.47	Peak
@ 2412.84	32.18	6.59	71.91	110.68	---	---	Peak

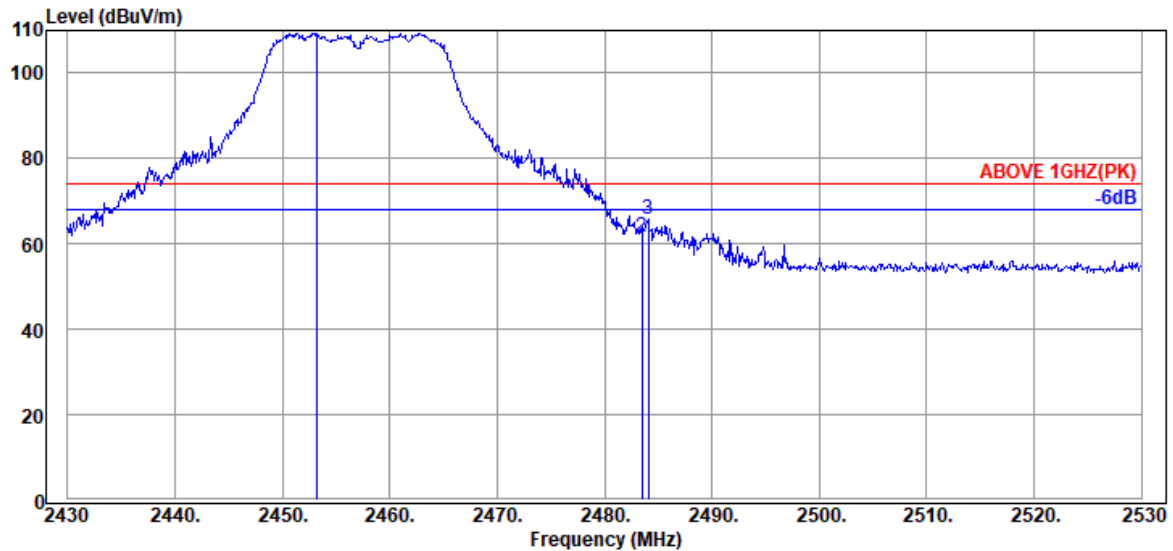


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.96	32.16	6.57	9.21	47.94	54.00	6.06	Average
2390.04	32.16	6.57	8.94	47.67	54.00	6.33	Average
@ 2412.72	32.18	6.59	62.82	101.59	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

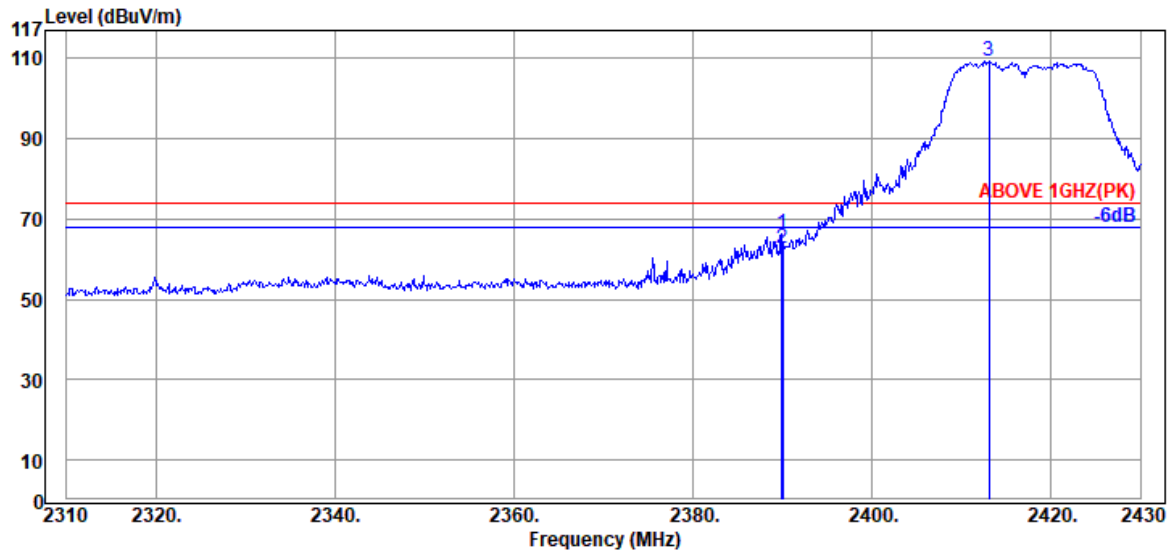

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.92	32.16	6.57	27.72	66.45	74.00	7.55	Peak
2390.04	32.16	6.57	24.17	62.90	74.00	11.10	Peak
@ 2413.08	32.18	6.59	70.44	109.21	---	---	Peak

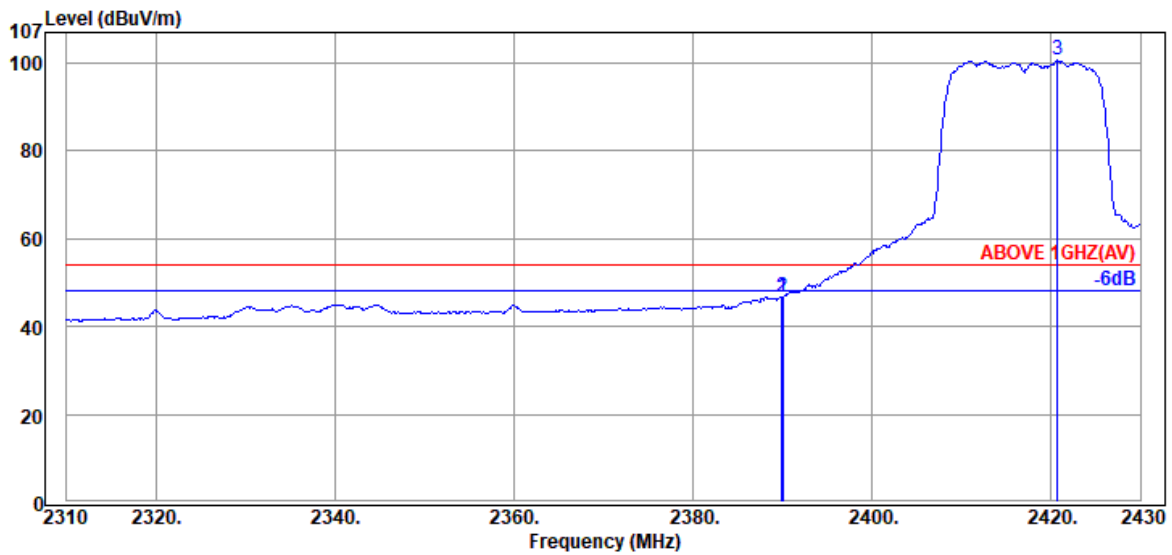


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.92	32.16	6.57	8.00	46.73	54.00	7.27	Average
2390.04	32.16	6.57	8.09	46.82	54.00	7.18	Average
@ 2420.76	32.20	6.61	61.86	100.67	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

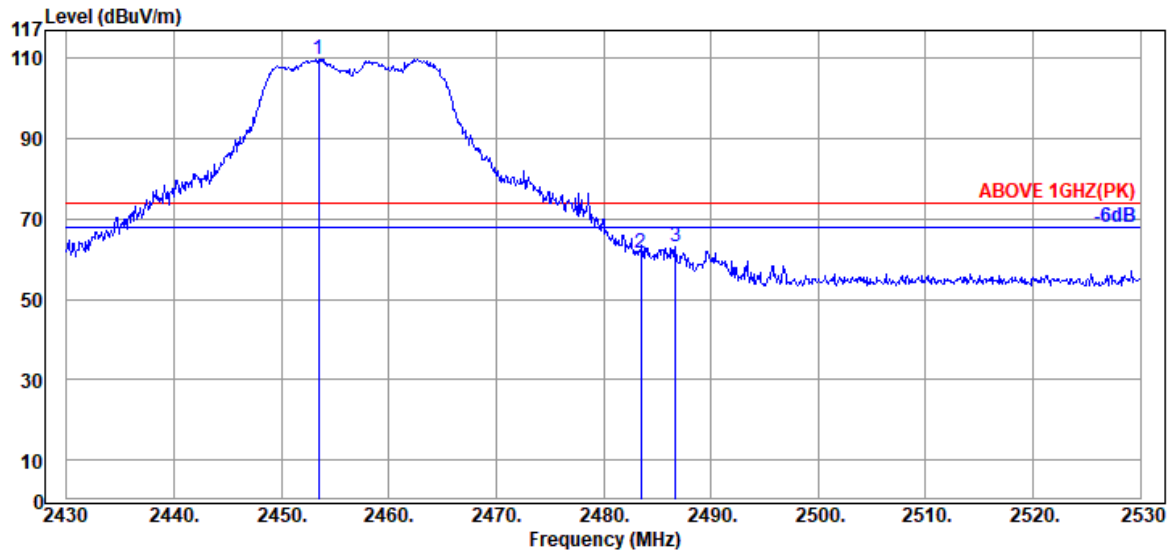

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2453.50	32.25	6.65	70.90	109.80	---	---	Peak
	2483.50	32.28	6.67	22.56	61.51	74.00	12.49	Peak
	2486.70	32.28	6.67	24.35	63.30	74.00	10.70	Peak

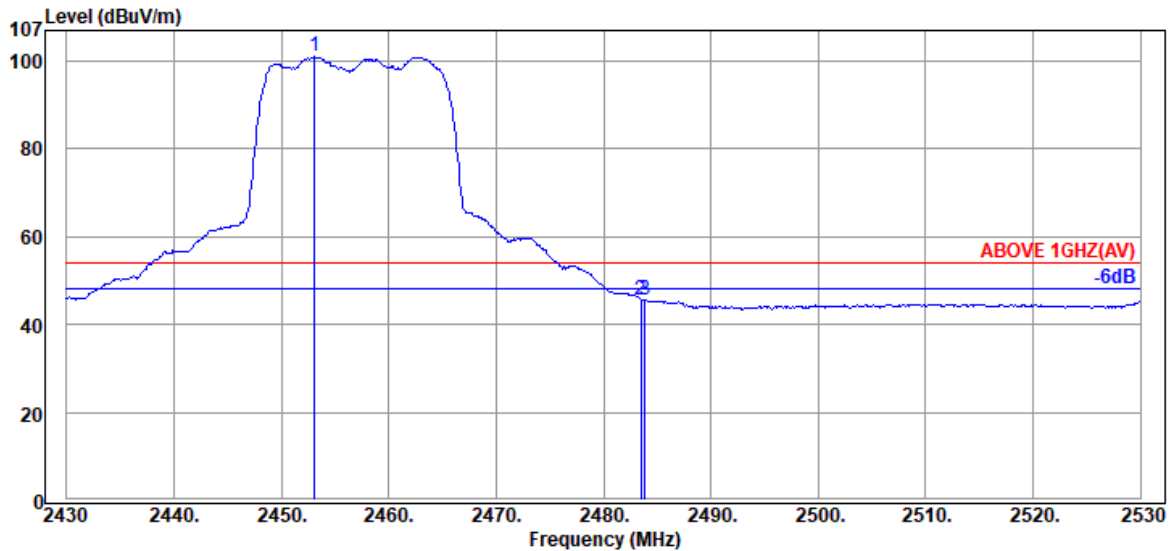


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2453.10	32.23	6.63	62.09	100.95	---	---	Average
	2483.50	32.28	6.67	6.69	45.64	54.00	8.36	Average
	2483.90	32.28	6.67	6.61	45.56	54.00	8.44	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

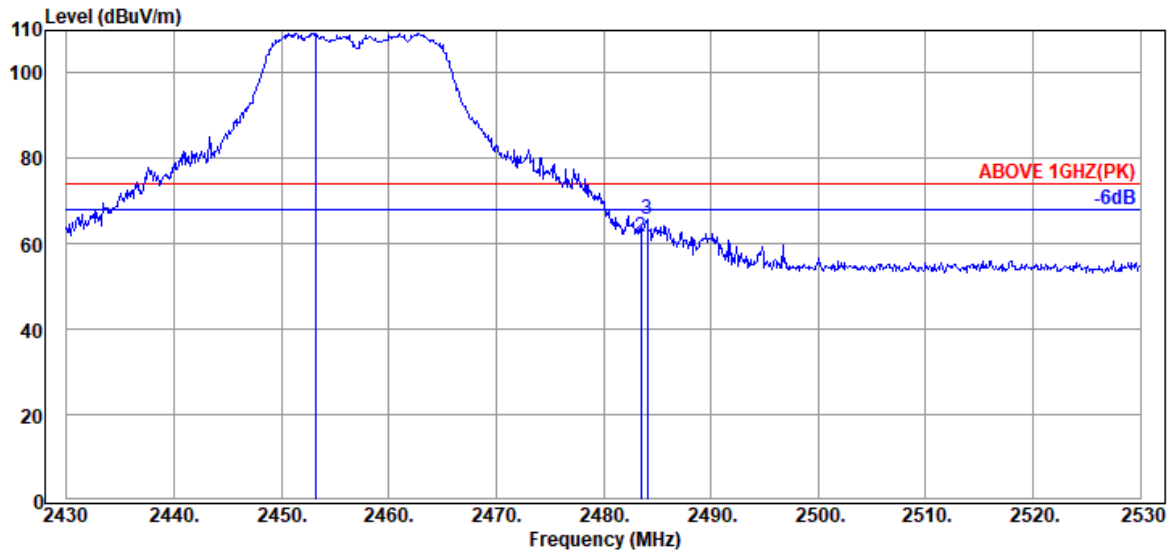

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2453.20	32.23	6.63	70.47	109.33	---	---	Peak
	2483.50	32.28	6.67	22.84	61.79	74.00	12.21	Peak
	2484.10	32.28	6.67	26.82	65.77	74.00	8.23	Peak

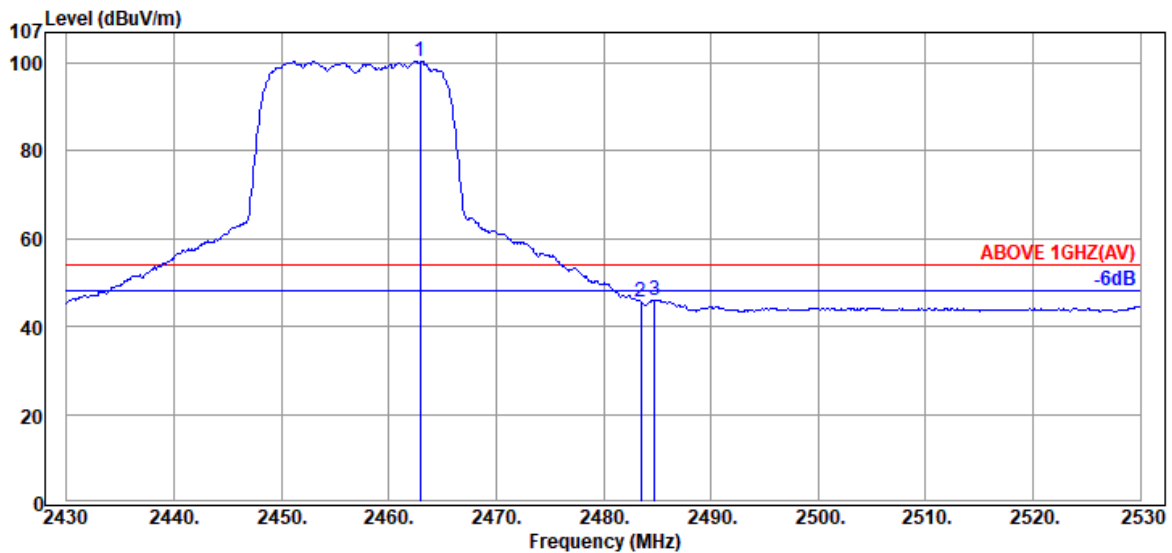


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.90	32.25	6.65	61.49	100.39	---	---	Average
	2483.50	32.28	6.67	6.69	45.64	54.00	8.36	Average
	2484.80	32.28	6.67	7.14	46.09	54.00	7.91	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

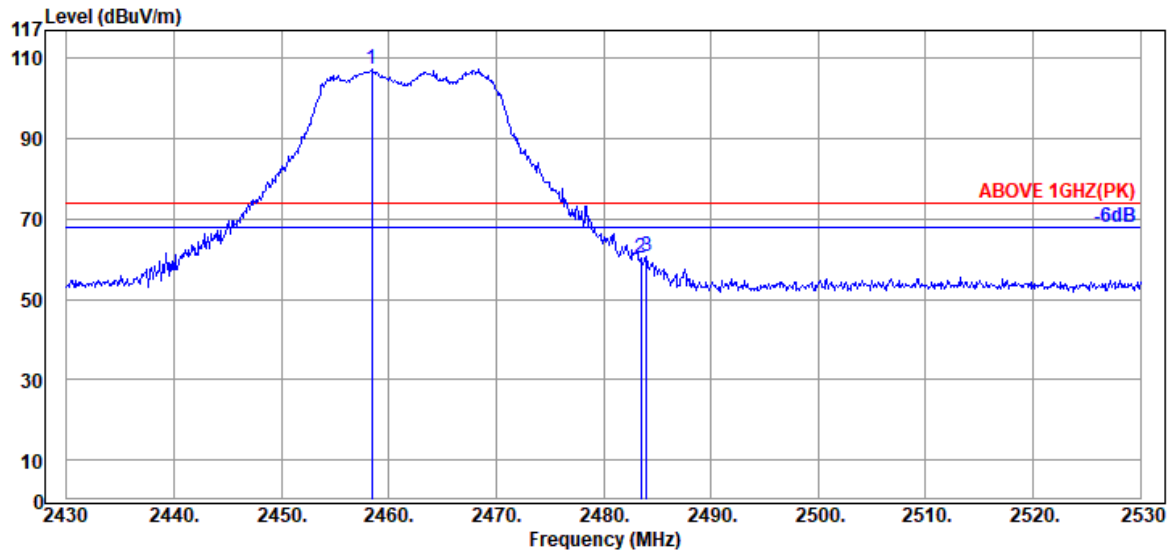

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.40	32.25	6.65	68.45	107.35	---	---	Peak
	2483.50	32.28	6.67	21.42	60.37	74.00	13.63	Peak
	2484.00	32.28	6.67	21.63	60.58	74.00	13.42	Peak

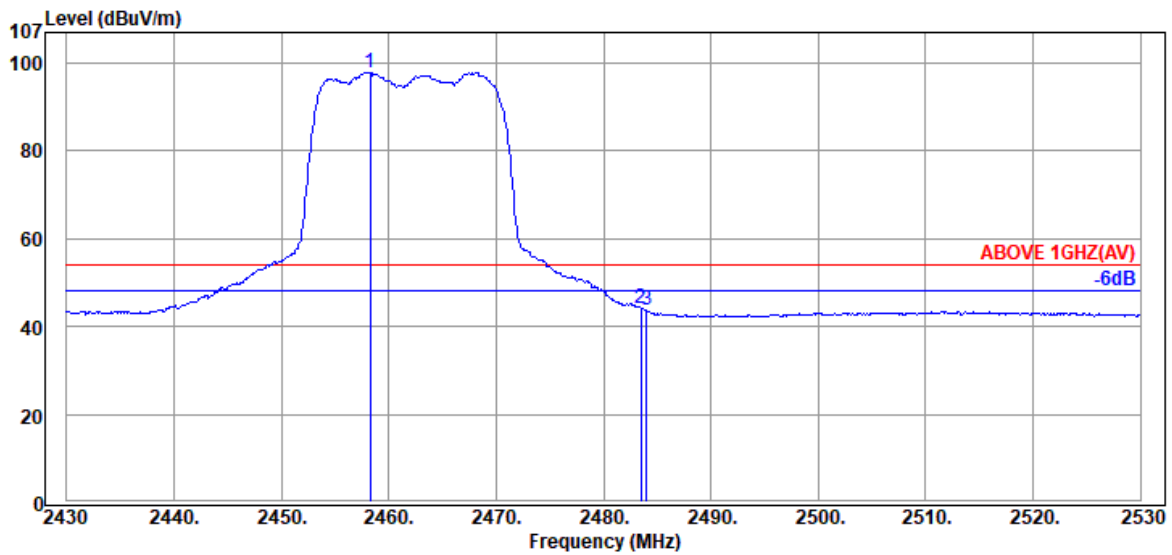


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.30	32.25	6.65	58.99	97.89	---	---	Average
	2483.50	32.28	6.67	5.27	44.22	54.00	9.78	Average
	2484.00	32.28	6.67	4.72	43.67	54.00	10.33	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

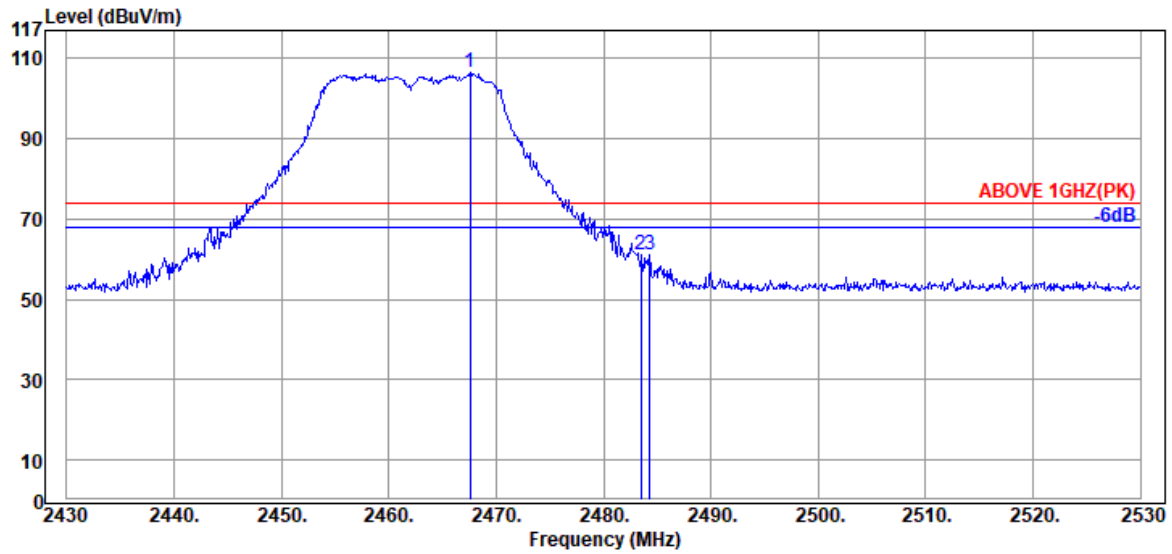

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2467.60	32.25	6.65	67.51	106.41	---	---	Peak
	2483.50	32.28	6.67	22.02	60.97	74.00	13.03	Peak
	2484.30	32.28	6.67	22.02	60.97	74.00	13.03	Peak

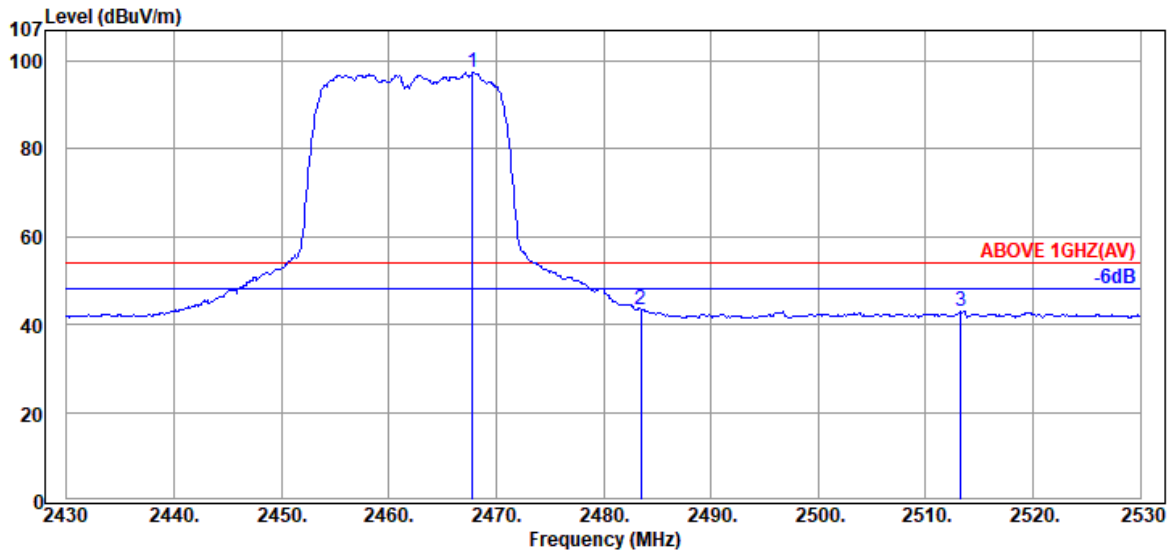


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2467.80	32.25	6.65	58.49	97.39	---	---	Average
	2483.50	32.28	6.67	4.46	43.41	54.00	10.59	Average
	2513.30	32.32	6.72	3.84	42.88	54.00	11.12	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

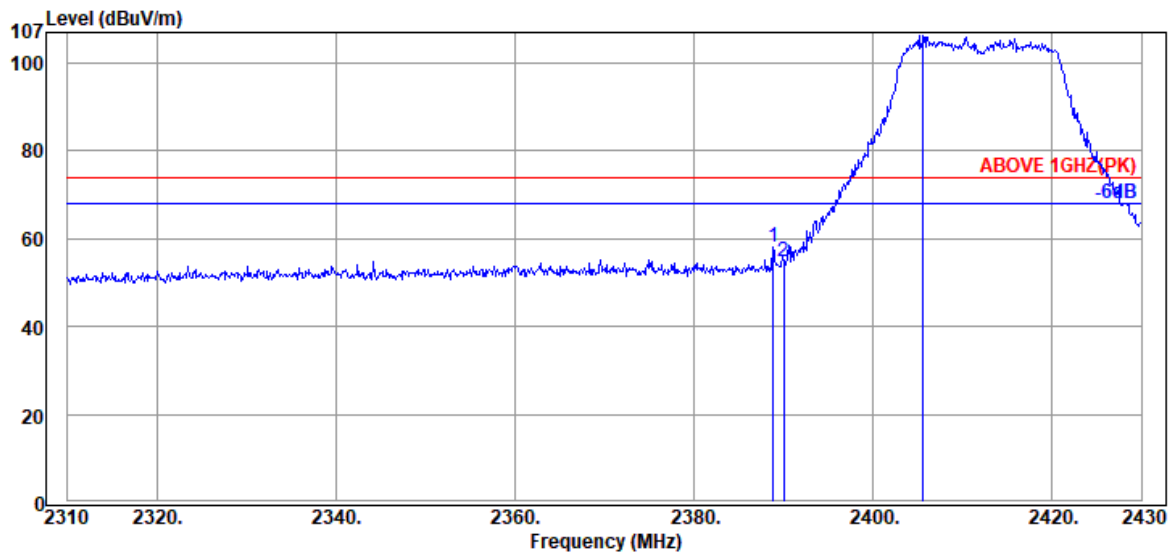

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.84	32.16	6.57	19.44	58.17	74.00	15.83	Peak
2390.04	32.16	6.57	16.21	54.94	74.00	19.06	Peak
@ 2405.64	32.18	6.59	67.53	106.30	---	---	Peak

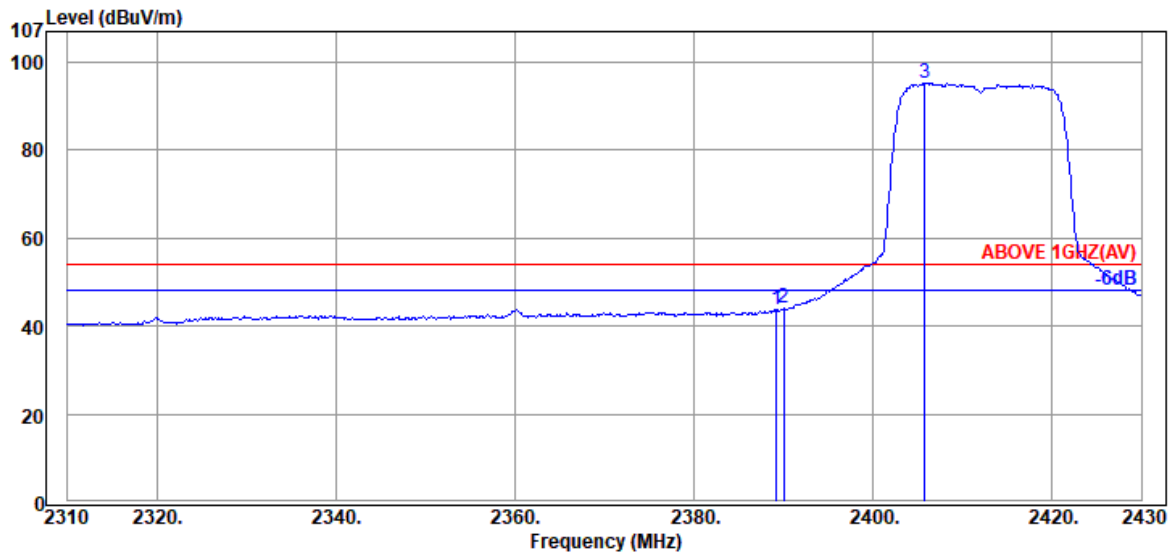


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.20	32.16	6.57	5.17	43.90	54.00	10.10	Average
2390.04	32.16	6.57	5.29	44.02	54.00	9.98	Average
@ 2405.76	32.18	6.59	56.43	95.20	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

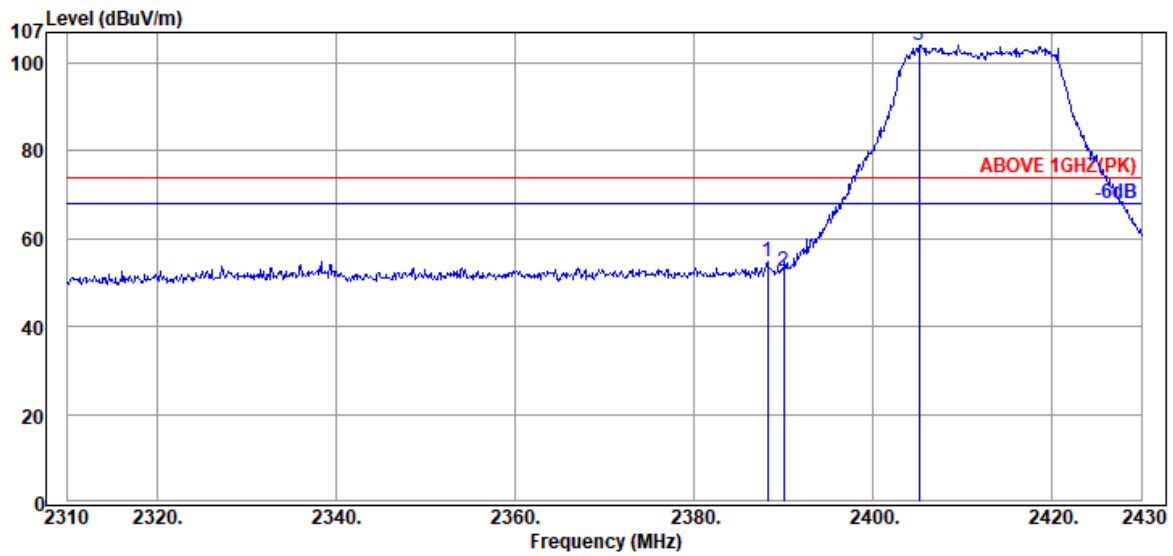

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.24	32.16	6.57	16.07	54.80	74.00	19.20	Peak
2390.04	32.16	6.57	13.83	52.56	74.00	21.44	Peak
@ 2405.16	32.18	6.59	65.39	104.16	---	---	Peak

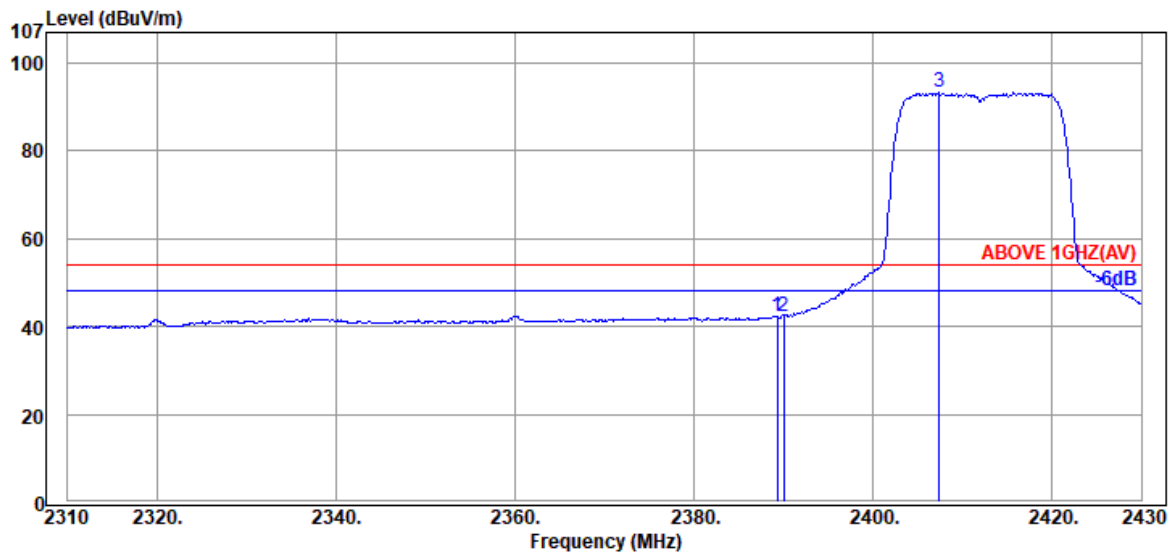


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	32.16	6.57	3.59	42.32	54.00	11.68	Average
2390.04	32.16	6.57	3.72	42.45	54.00	11.55	Average
@ 2407.44	32.18	6.59	54.49	93.26	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

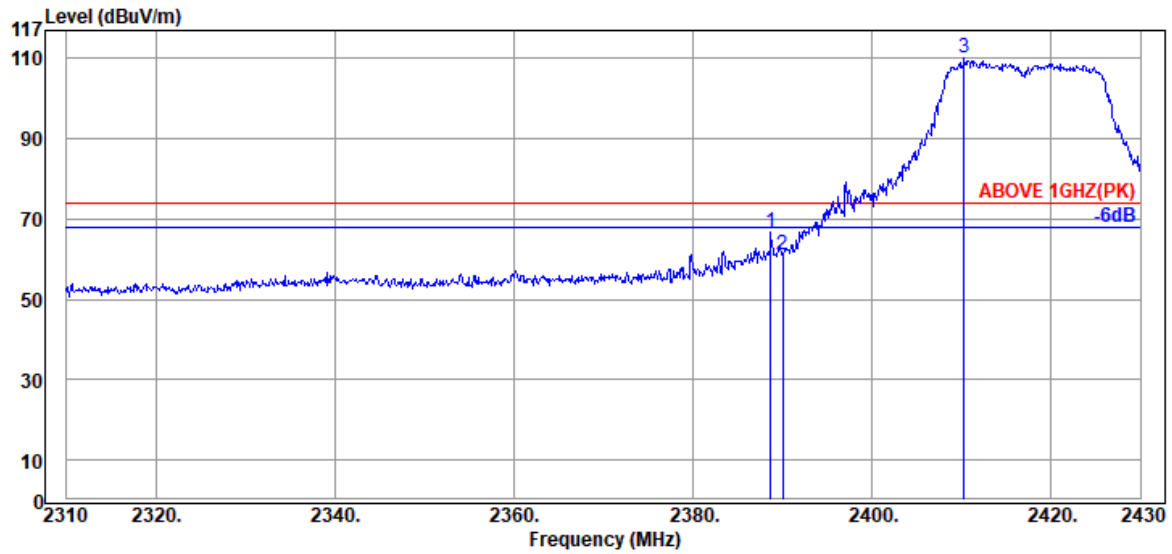

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.72	32.16	6.57	28.05	66.78	74.00	7.22	Peak
2390.04	32.16	6.57	22.58	61.31	74.00	12.69	Peak
@ 2410.32	32.18	6.59	71.32	110.09	---	---	Peak

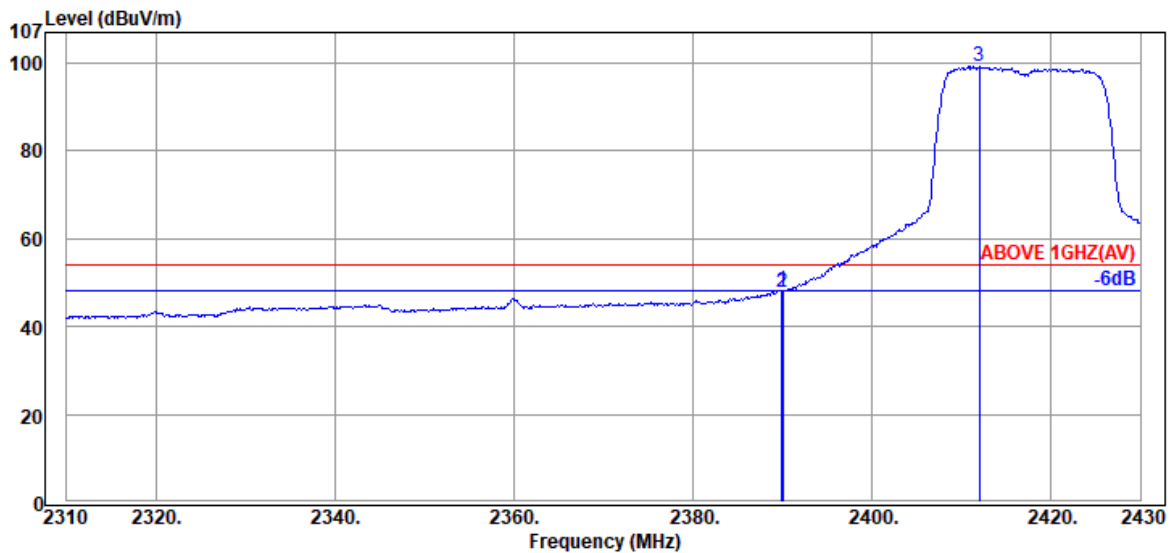


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.92	32.16	6.57	9.50	48.23	54.00	5.77	Average
2390.04	32.16	6.57	9.18	47.91	54.00	6.09	Average
@ 2412.00	32.18	6.59	60.50	99.27	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

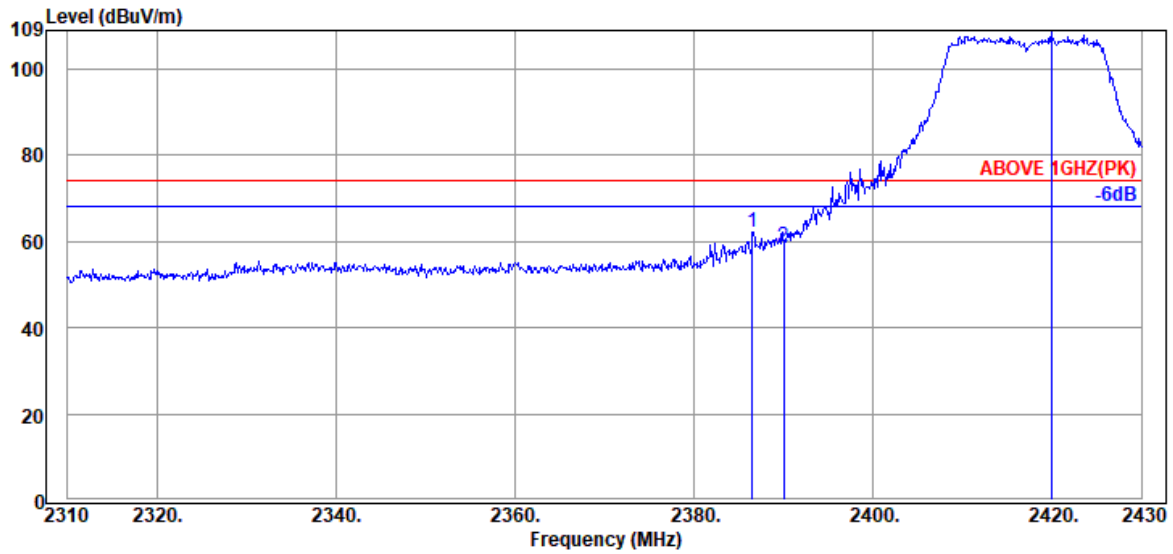

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.56	32.16	6.57	23.36	62.09	74.00	11.91	Peak
2390.04	32.16	6.57	20.00	58.73	74.00	15.27	Peak
@ 2419.92	32.20	6.61	69.66	108.47	---	---	Peak

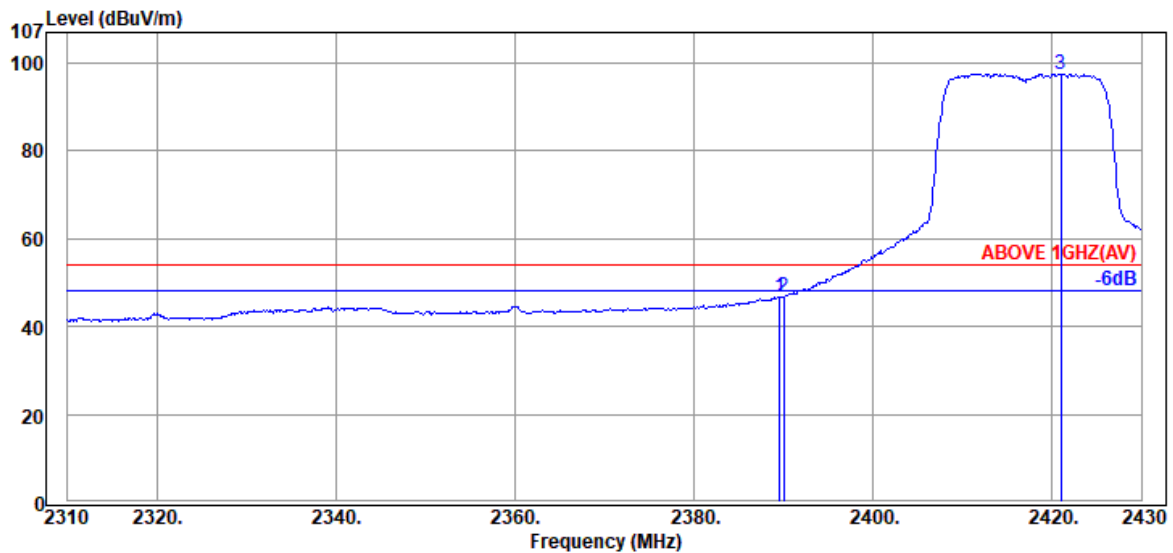


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.56	32.16	6.57	7.88	46.61	54.00	7.39	Average
2390.04	32.16	6.57	8.02	46.75	54.00	7.25	Average
@ 2421.00	32.20	6.61	58.79	97.60	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

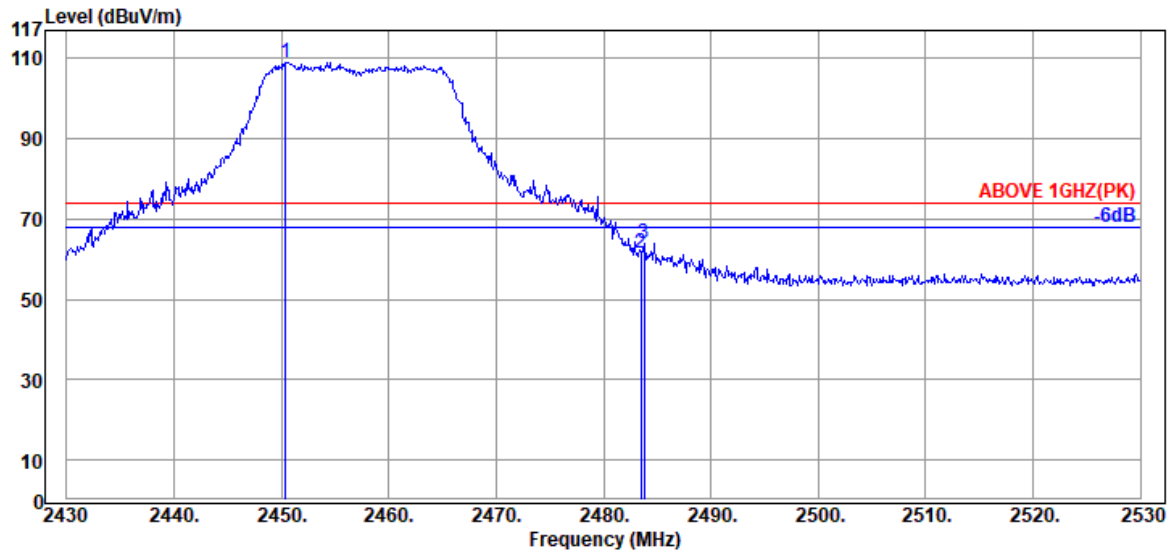

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2450.40	32.23	6.63	70.22	109.08	---	---	Peak
	2483.50	32.28	6.67	22.64	61.59	74.00	12.41	Peak
	2483.80	32.28	6.67	24.80	63.75	74.00	10.25	Peak

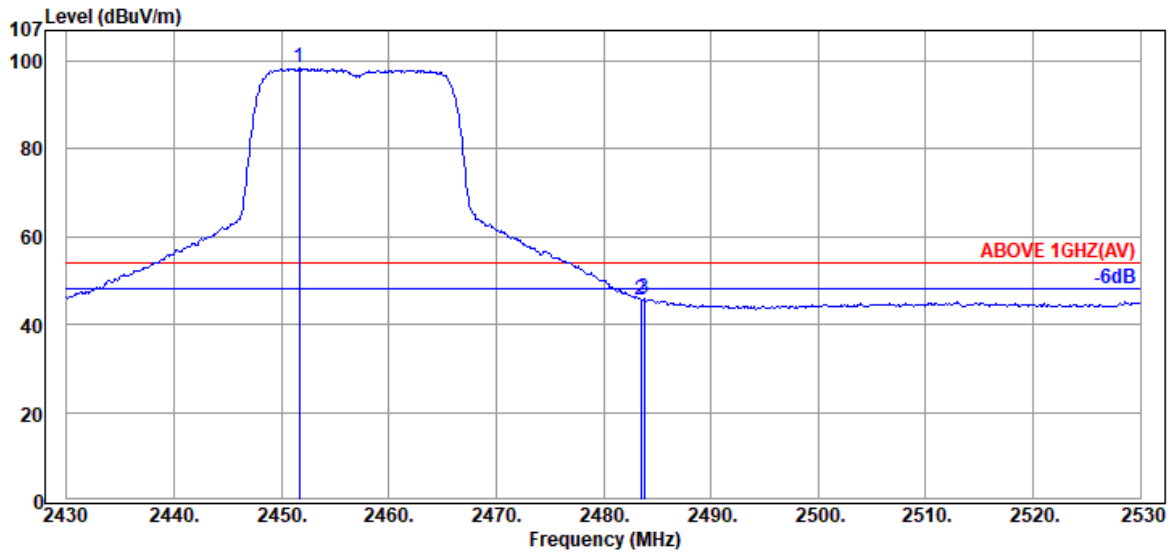


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2451.70	32.23	6.63	59.51	98.37	---	---	Average
	2483.50	32.28	6.67	6.54	45.49	54.00	8.51	Average
	2483.80	32.28	6.67	6.89	45.84	54.00	8.16	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

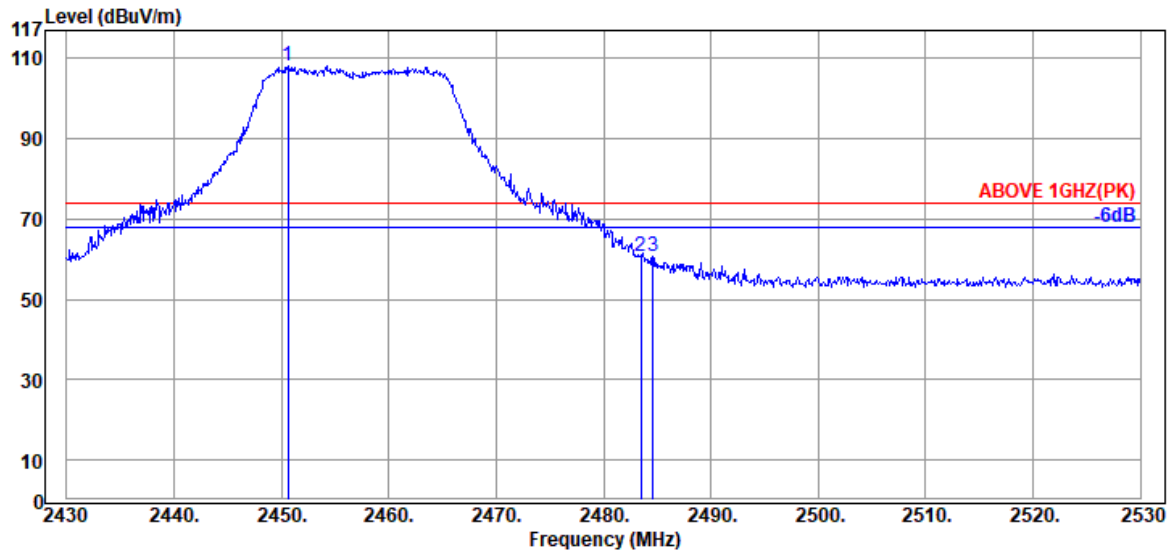

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2450.60	32.23	6.63	69.42	108.28	---	---	Peak
	2483.50	32.28	6.67	21.69	60.64	74.00	13.36	Peak
	2484.60	32.28	6.67	21.61	60.56	74.00	13.44	Peak

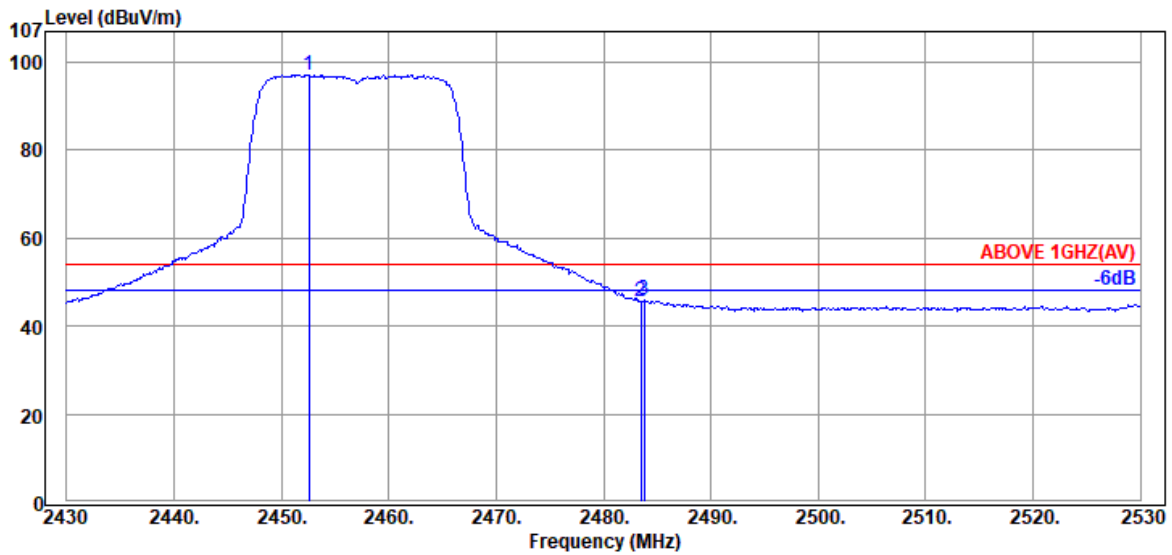


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2452.60	32.23	6.63	58.36	97.22	---	---	Average
	2483.50	32.28	6.67	6.67	45.62	54.00	8.38	Average
	2483.80	32.28	6.67	6.89	45.84	54.00	8.16	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

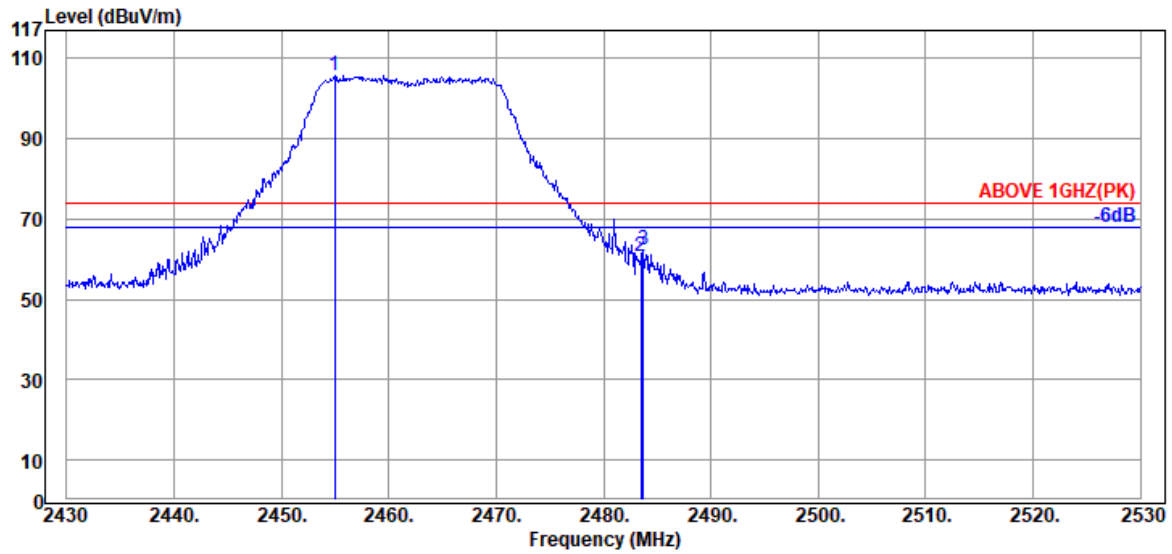

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.00	32.25	6.65	66.91	105.81	---	---	Peak
	2483.50	32.28	6.67	21.74	60.69	74.00	13.31	Peak
	2483.70	32.28	6.67	23.29	62.24	74.00	11.76	Peak

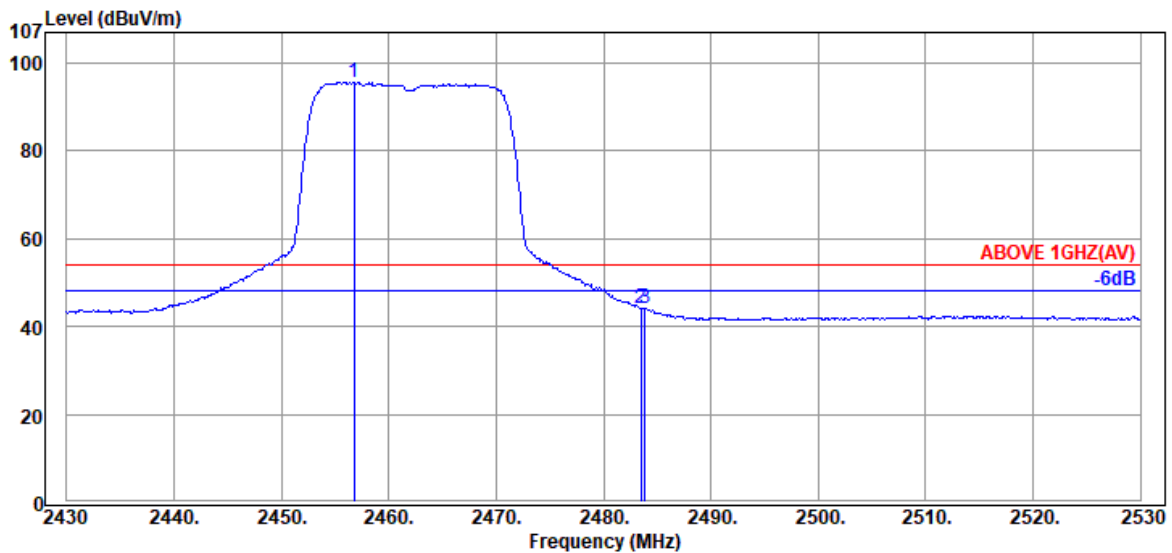


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.80	32.25	6.65	56.71	95.61	---	---	Average
	2483.50	32.28	6.67	5.20	44.15	54.00	9.85	Average
	2483.90	32.28	6.67	5.25	44.20	54.00	9.80	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

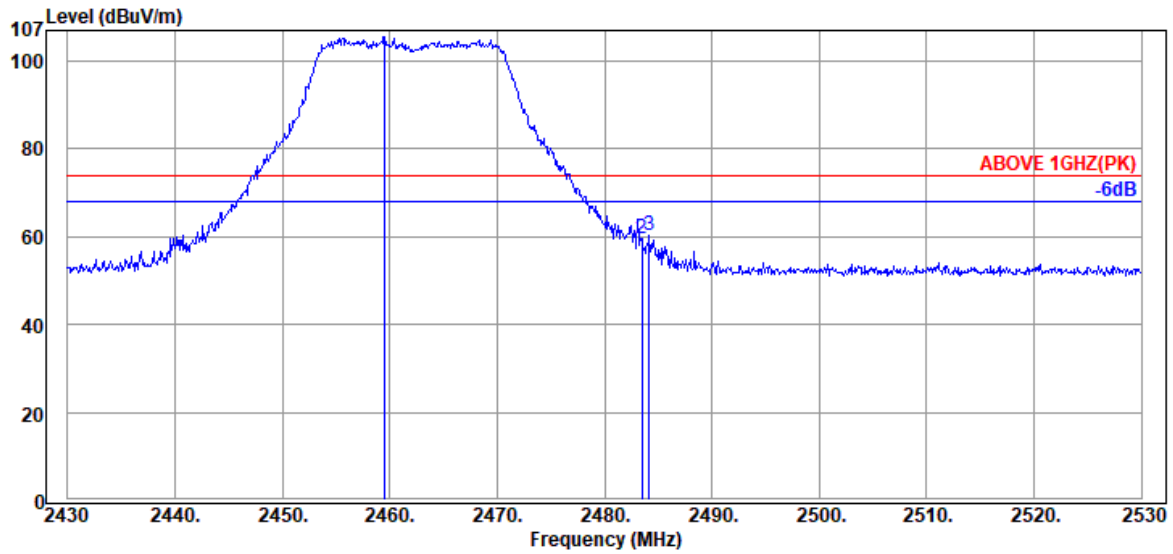

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.50	32.25	6.65	66.59	105.49	---	---	Peak
	2483.50	32.28	6.67	20.65	59.60	74.00	14.40	Peak
	2484.20	32.28	6.67	21.37	60.32	74.00	13.68	Peak

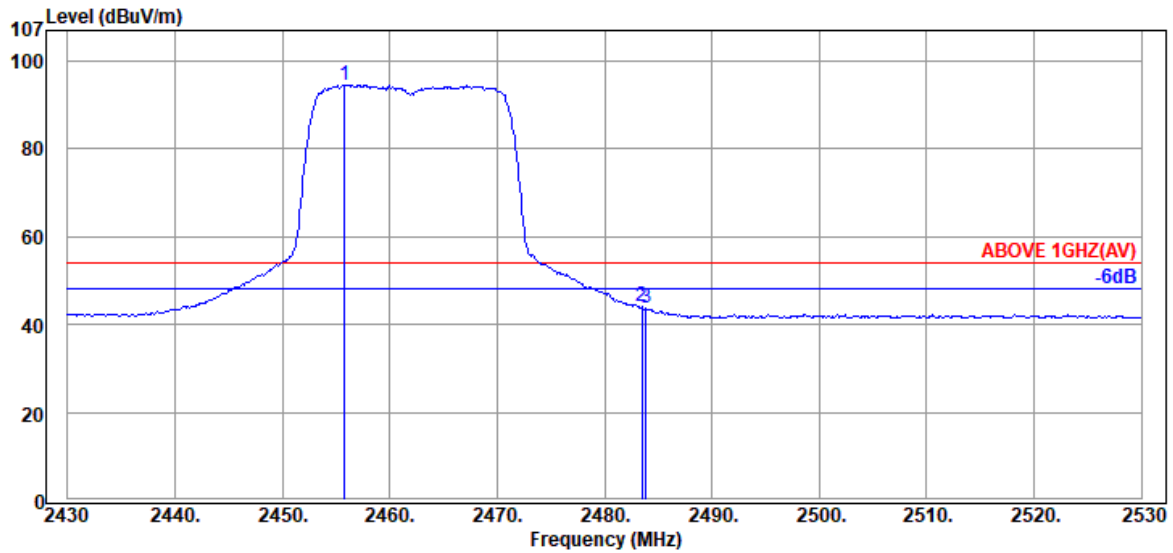


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2455.80	32.25	6.65	55.71	94.61	---	---	Average
	2483.50	32.28	6.67	5.01	43.96	54.00	10.04	Average
	2483.90	32.28	6.67	4.67	43.62	54.00	10.38	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

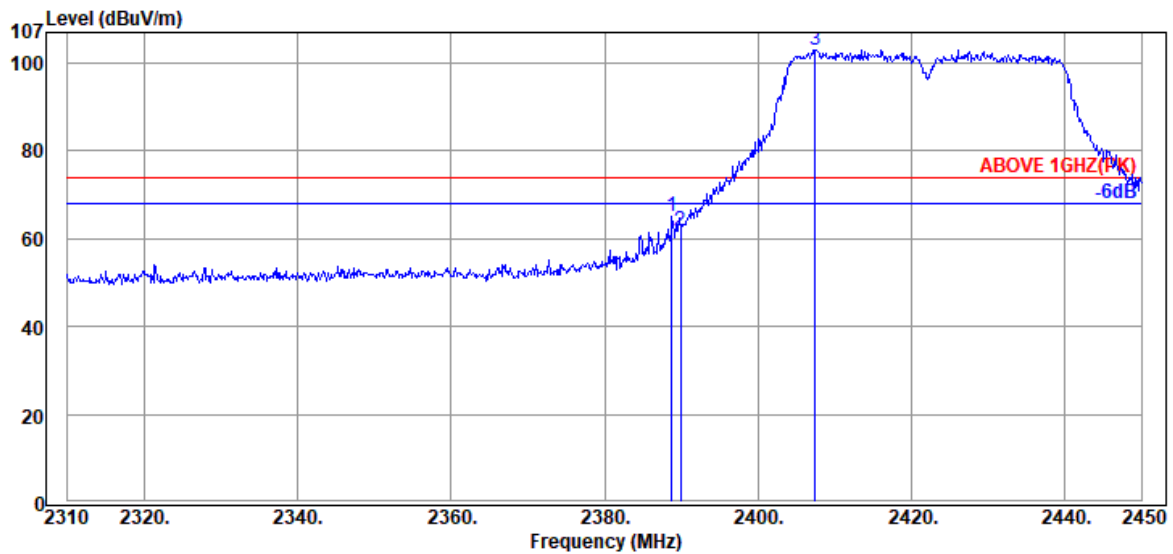

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.82	32.16	6.57	26.25	64.98	74.00	9.02	Peak
2389.94	32.16	6.57	23.03	61.76	74.00	12.24	Peak
@ 2407.44	32.18	6.59	64.24	103.01	---	---	Peak

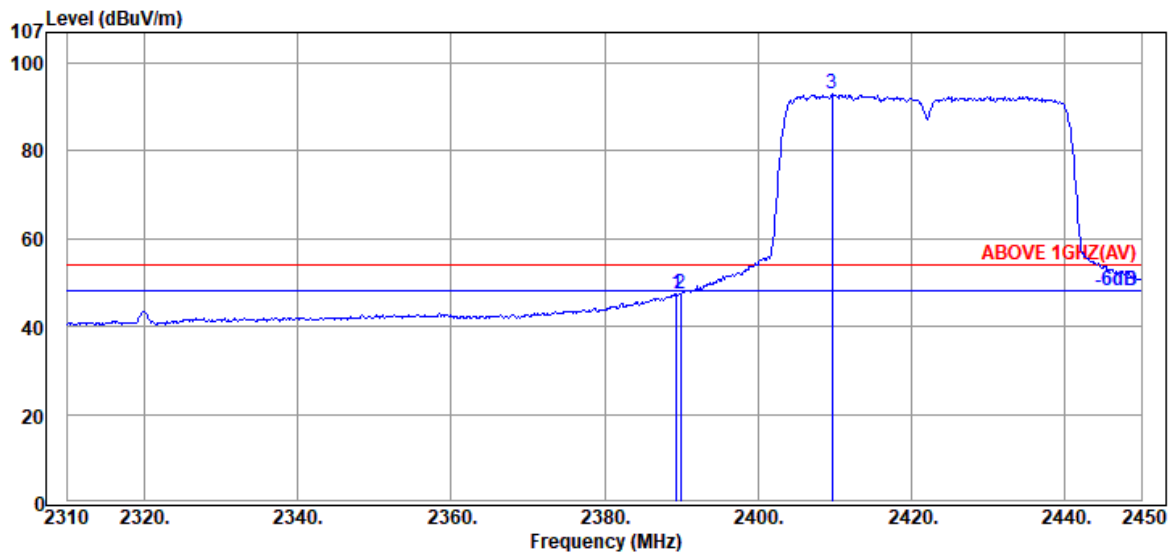


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.38	32.16	6.57	8.79	47.52	54.00	6.48	Average
2389.94	32.16	6.57	8.68	47.41	54.00	6.59	Average
@ 2409.68	32.18	6.59	54.23	93.00	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

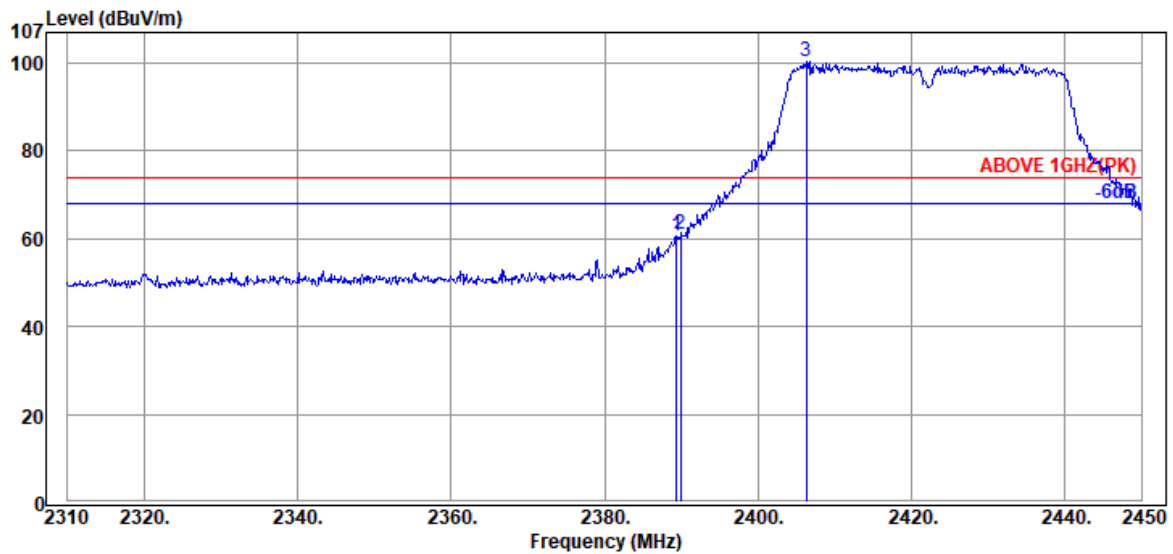

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.38	32.16	6.57	22.04	60.77	74.00	13.23	Peak
2389.94	32.16	6.57	22.35	61.08	74.00	12.92	Peak
@ 2406.32	32.18	6.59	61.54	100.31	---	---	Peak

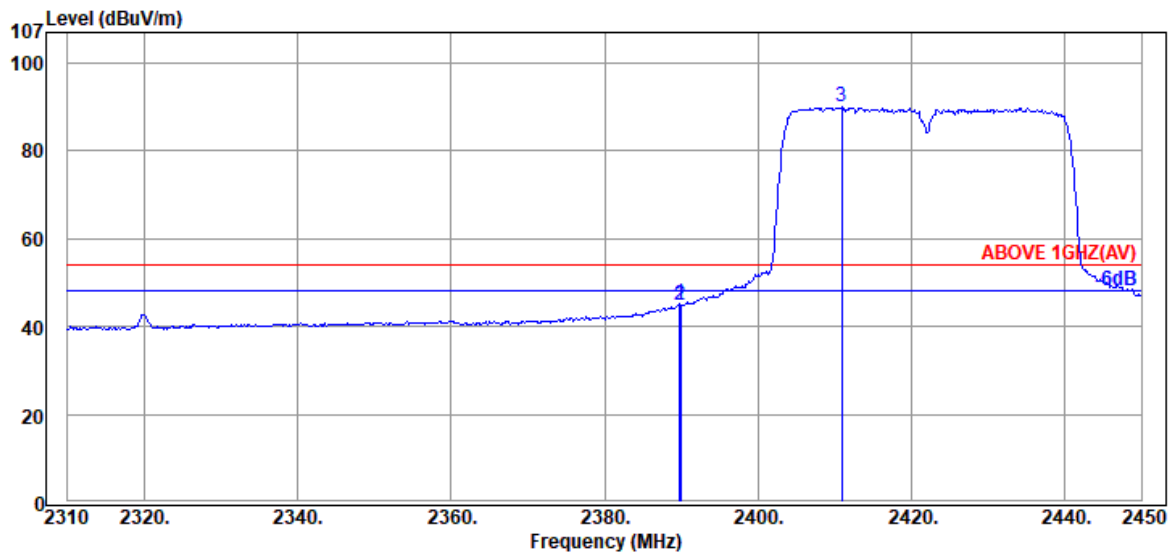


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.80	32.16	6.57	6.38	45.11	54.00	8.89	Average
2389.94	32.16	6.57	6.28	45.01	54.00	8.99	Average
@ 2410.94	32.18	6.59	51.25	90.02	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

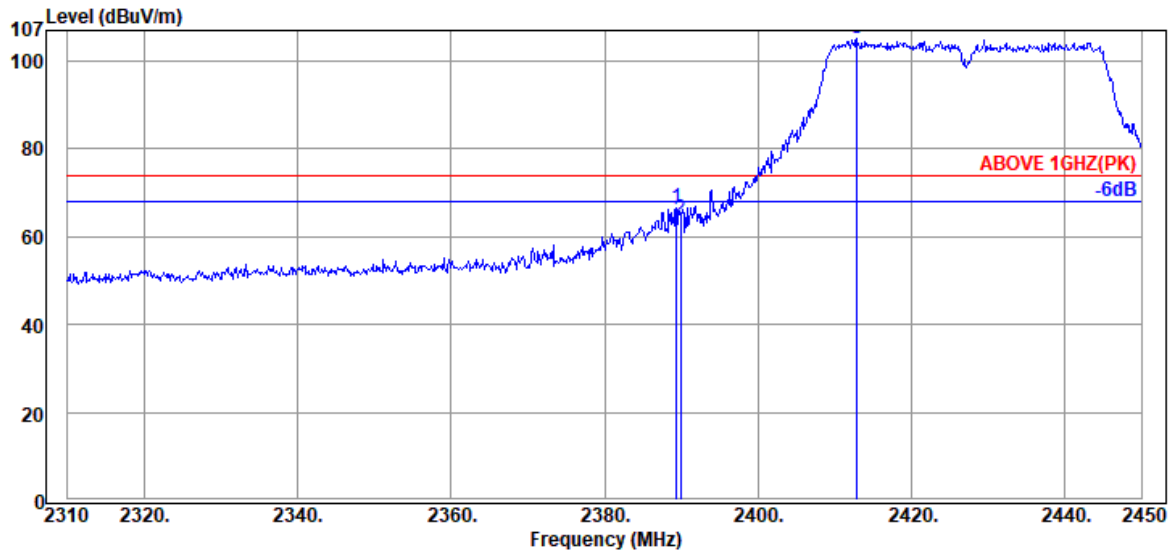

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.38	32.16	6.57	27.82	66.55	74.00	7.45	Peak
2389.94	32.16	6.57	25.28	64.01	74.00	9.99	Peak
@ 2412.90	32.18	6.59	66.57	105.34	---	---	Peak

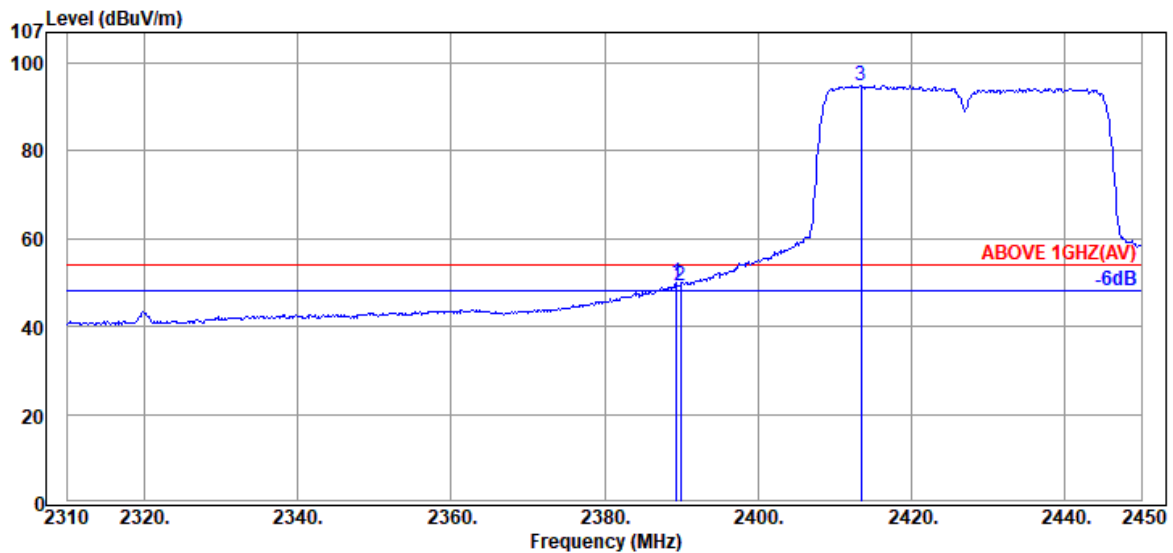


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.38	32.16	6.57	11.21	49.94	54.00	4.06	Average
2389.94	32.16	6.57	10.38	49.11	54.00	4.89	Average
@ 2413.46	32.18	6.59	55.99	94.76	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

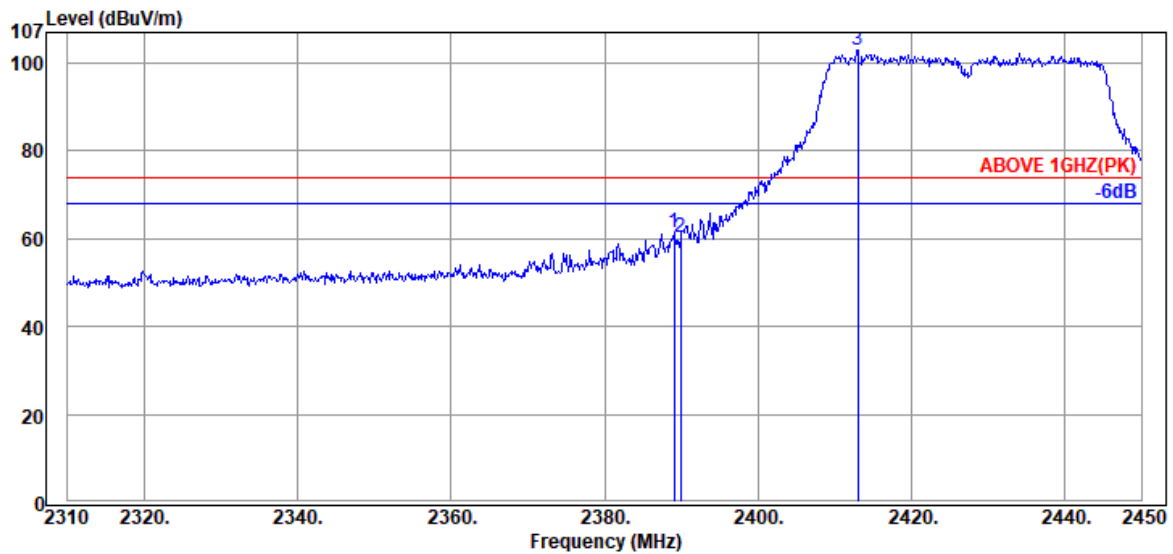

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.10	32.16	6.57	22.60	61.33	74.00	12.67	Peak
2389.94	32.16	6.57	21.65	60.38	74.00	13.62	Peak
@ 2413.04	32.18	6.59	64.05	102.82	---	---	Peak

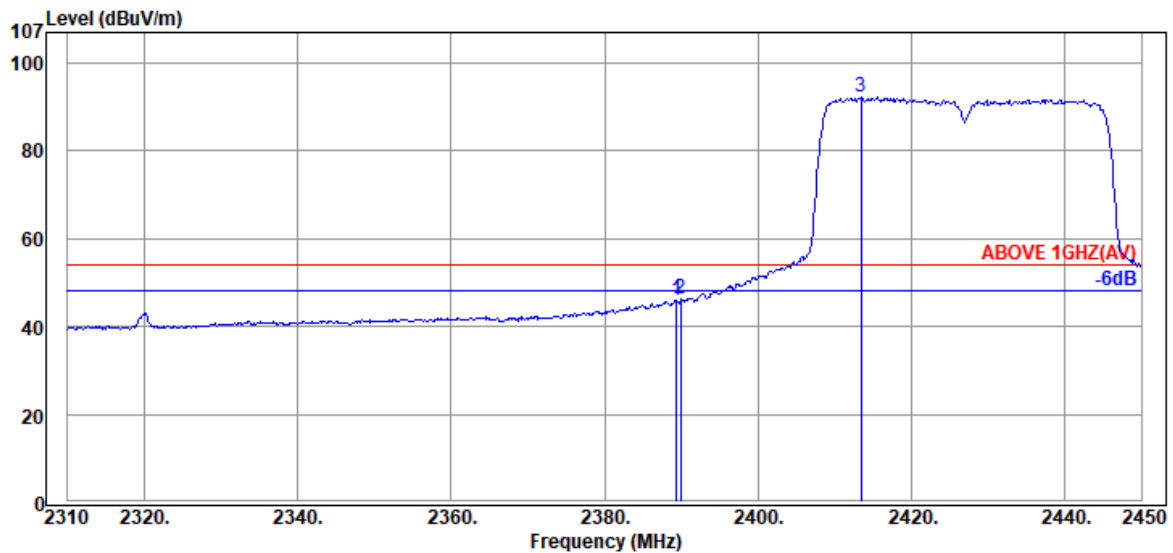


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.38	32.16	6.57	7.35	46.08	54.00	7.92	Average
2389.94	32.16	6.57	7.49	46.22	54.00	7.78	Average
@ 2413.46	32.18	6.59	53.51	92.28	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

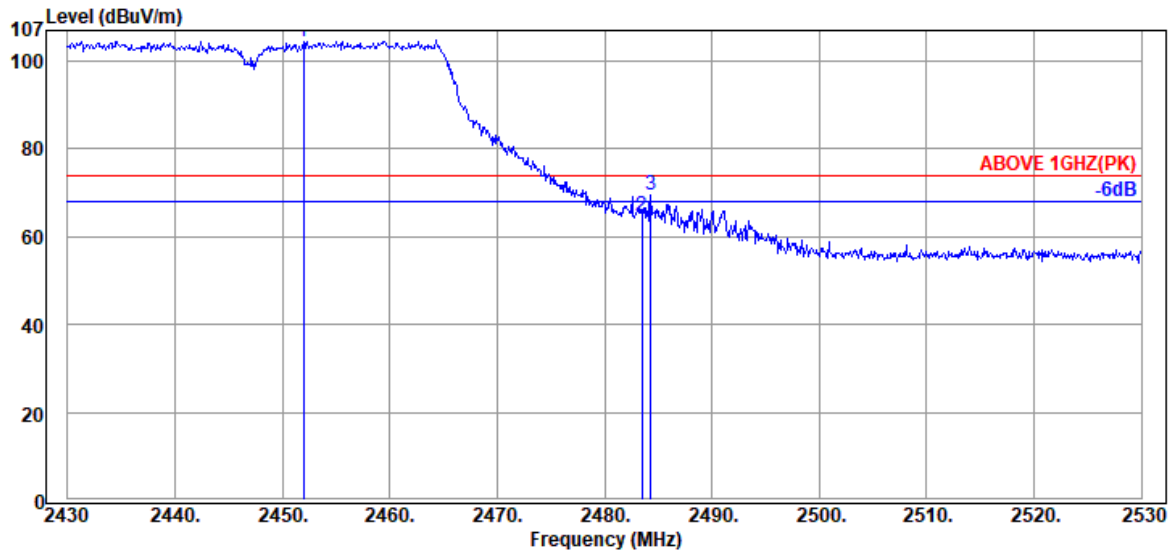

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2452.00	32.23	6.63	65.73	104.59	---	---	Peak
	2483.50	32.28	6.67	25.61	64.56	74.00	9.44	Peak
	2484.30	32.28	6.67	30.69	69.64	74.00	4.36	Peak

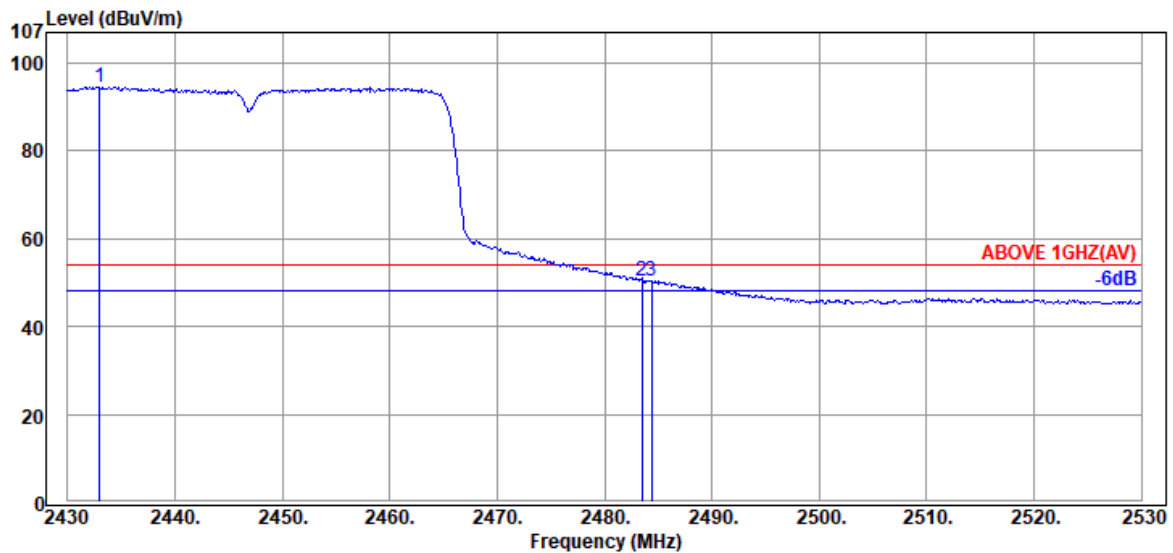


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2433.00	32.20	6.61	55.79	94.60	---	---	Average
	2483.50	32.28	6.67	11.60	50.55	54.00	3.45	Average
	2484.40	32.28	6.67	11.53	50.48	54.00	3.52	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

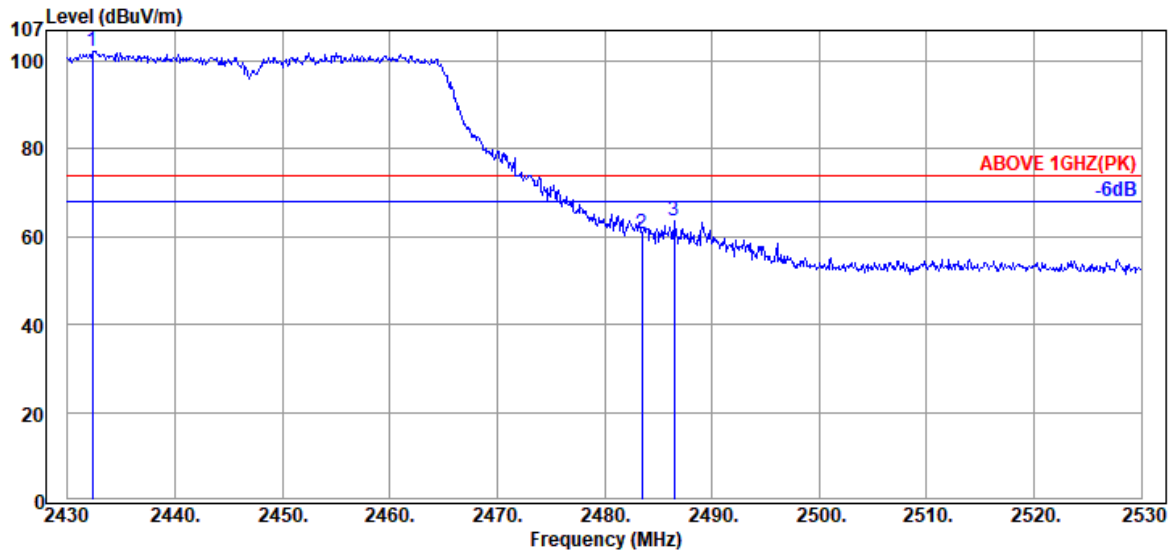

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2432.30	32.20	6.61	63.39	102.20	---	---	Peak
	2483.50	32.28	6.67	21.74	60.69	74.00	13.31	Peak
	2486.50	32.28	6.67	24.61	63.56	74.00	10.44	Peak

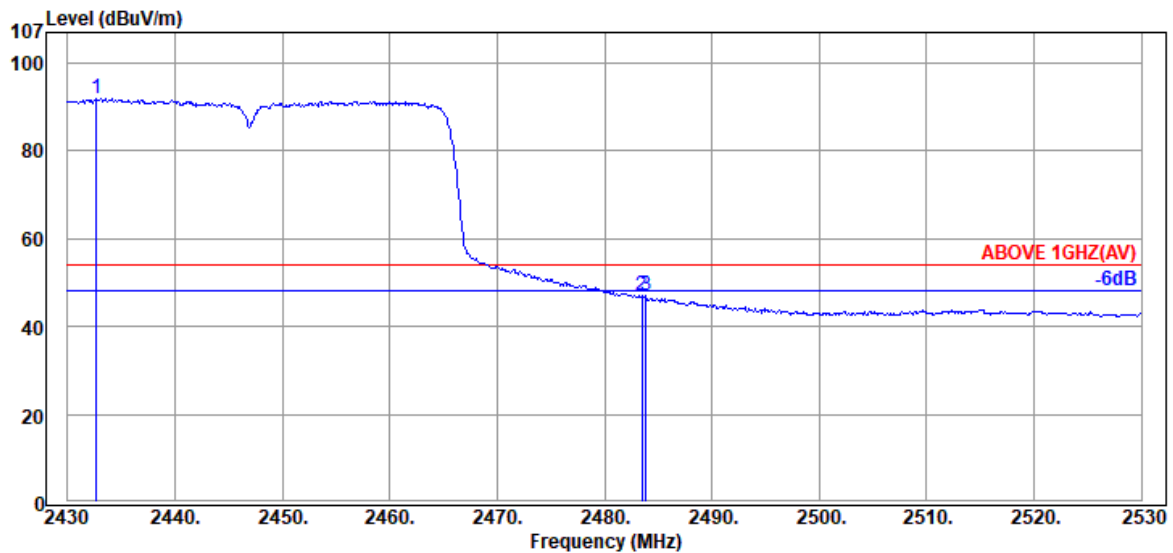


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2432.70	32.20	6.61	53.14	91.95	---	---	Average
	2483.50	32.28	6.67	8.02	46.97	54.00	7.03	Average
	2483.90	32.28	6.67	8.17	47.12	54.00	6.88	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

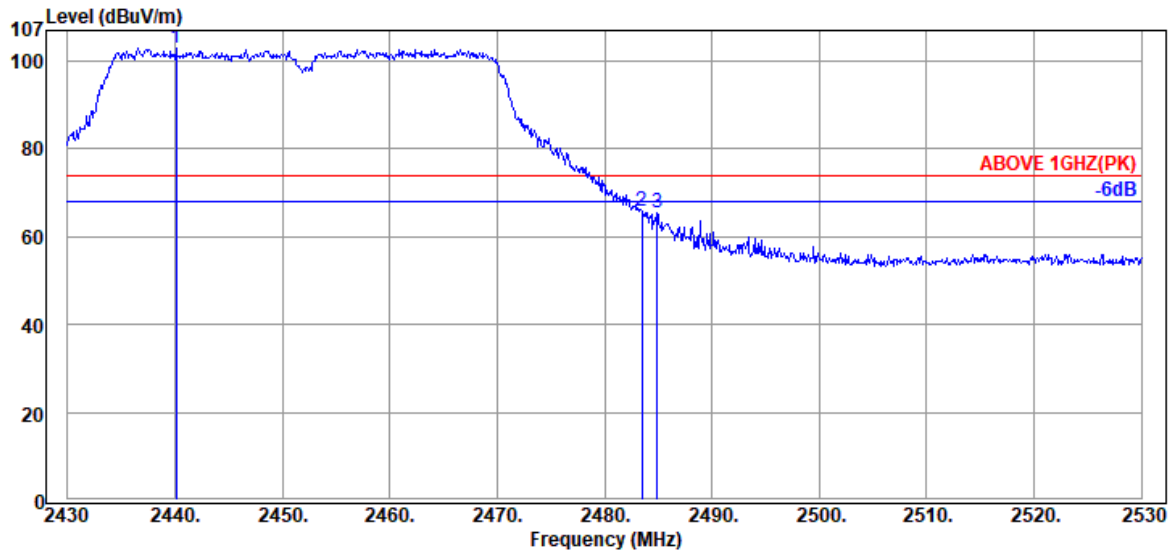

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2440.10	32.23	6.63	64.11	102.97	---	---	Peak
	2483.50	32.28	6.67	26.91	65.86	74.00	8.14	Peak
	2484.90	32.28	6.67	26.55	65.50	74.00	8.50	Peak

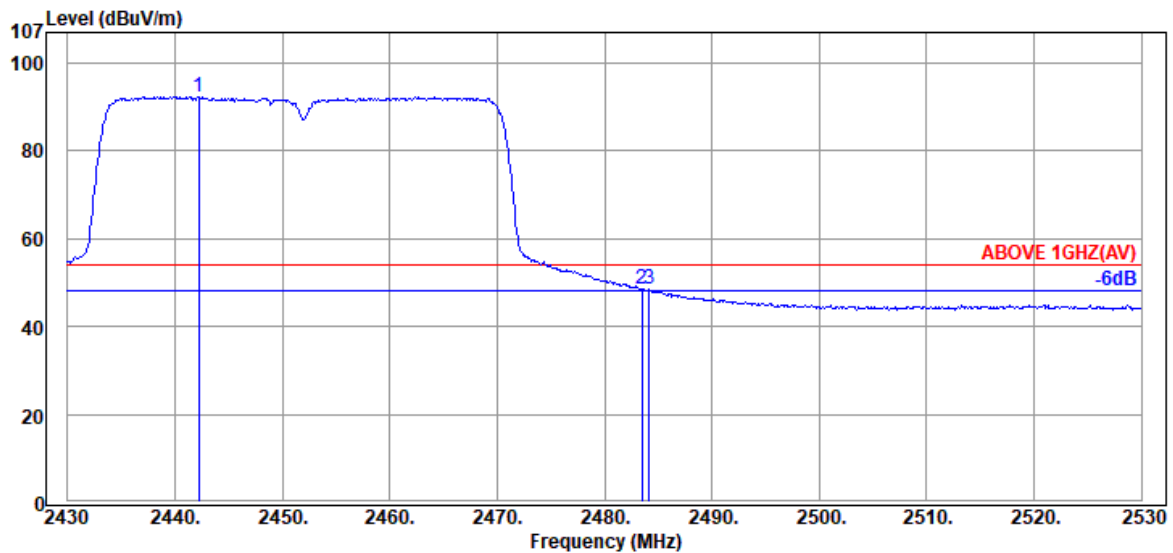


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2442.20	32.23	6.63	53.49	92.35	---	---	Average
	2483.50	32.28	6.67	9.47	48.42	54.00	5.58	Average
	2484.20	32.28	6.67	9.45	48.40	54.00	5.60	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

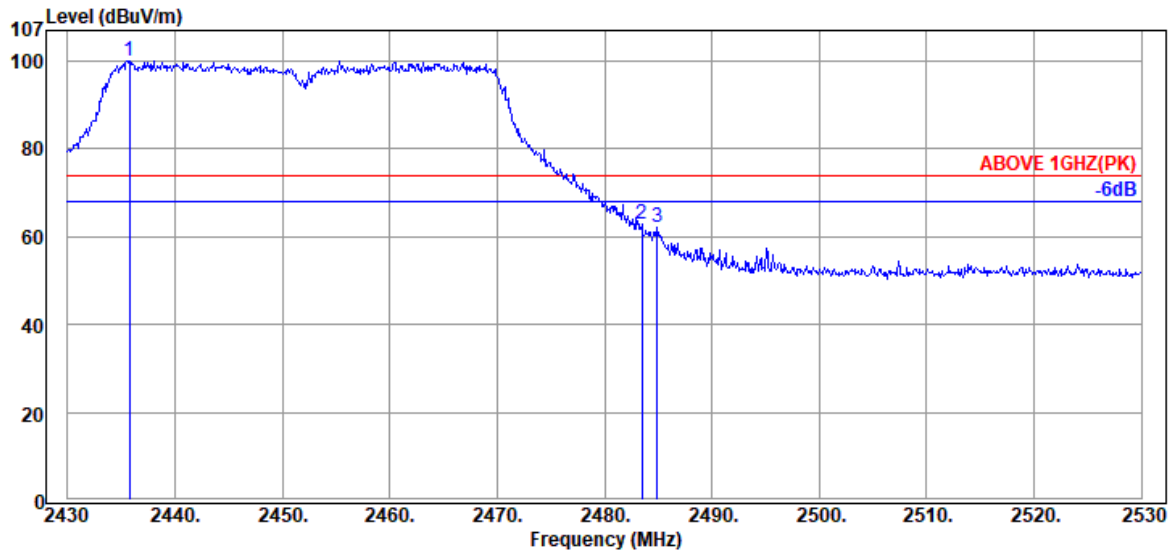

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2435.80	32.20	6.61	61.37	100.18	---	---	Peak
	2483.50	32.28	6.67	24.01	62.96	74.00	11.04	Peak
	2484.90	32.28	6.67	23.04	61.99	74.00	12.01	Peak

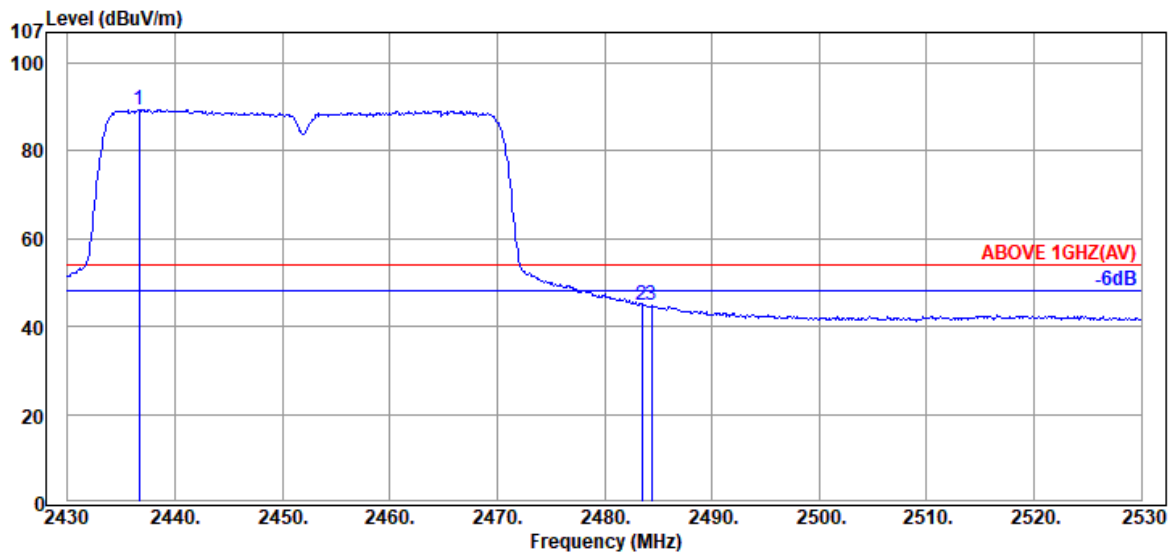

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2436.70	32.23	6.63	50.63	89.49	---	---	Average
	2483.50	32.28	6.67	6.08	45.03	54.00	8.97	Average
	2484.40	32.28	6.67	6.00	44.95	54.00	9.05	Average

備註：“@”為主波，在此章節是不予以判定。


2. 發射頻寬之量測


測試日期	2018/01/03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)		

2.1. 發射頻寬

模式	測試頻率 (MHz)	6dB 頻寬 (MHz)	限制值 (kHz)
802.11b	2412	10.14	>500
	2437	10.14	
	2462	10.14	
802.11g	2412	16.39	
	2437	16.34	
	2462	16.39	
802.11n-HT20	2412	17.40	
	2437	17.35	
	2462	17.38	
802.11n-HT40	2422	35.19	
	2437	35.09	
	2452	35.76	

2.2. 發射頻寬之量測圖

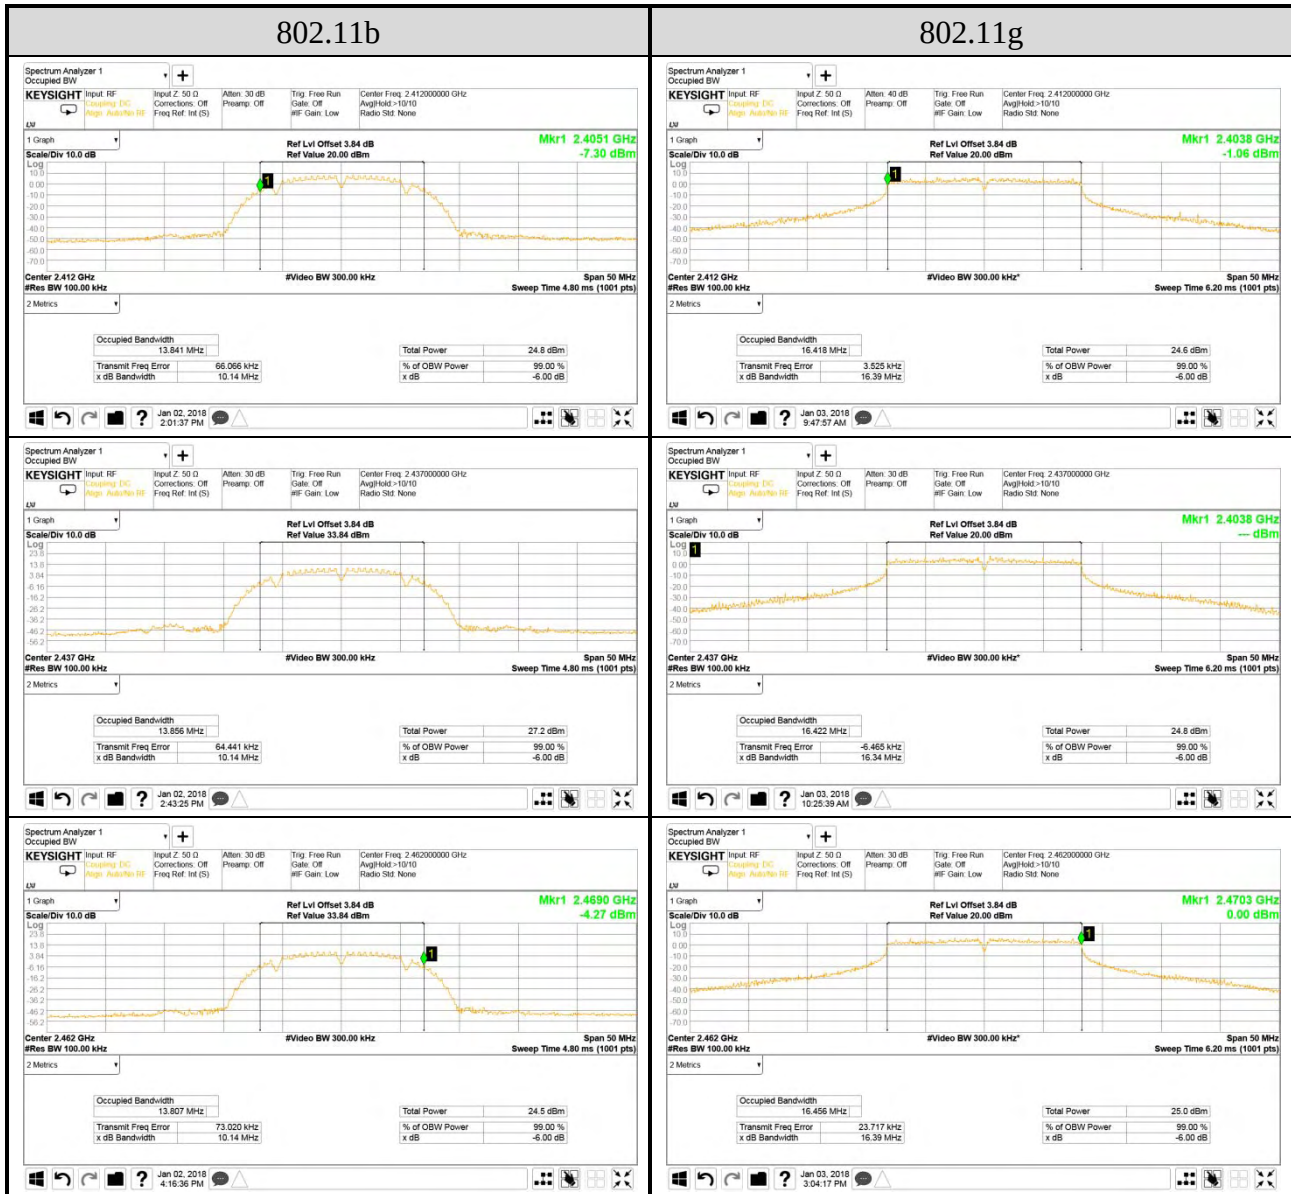

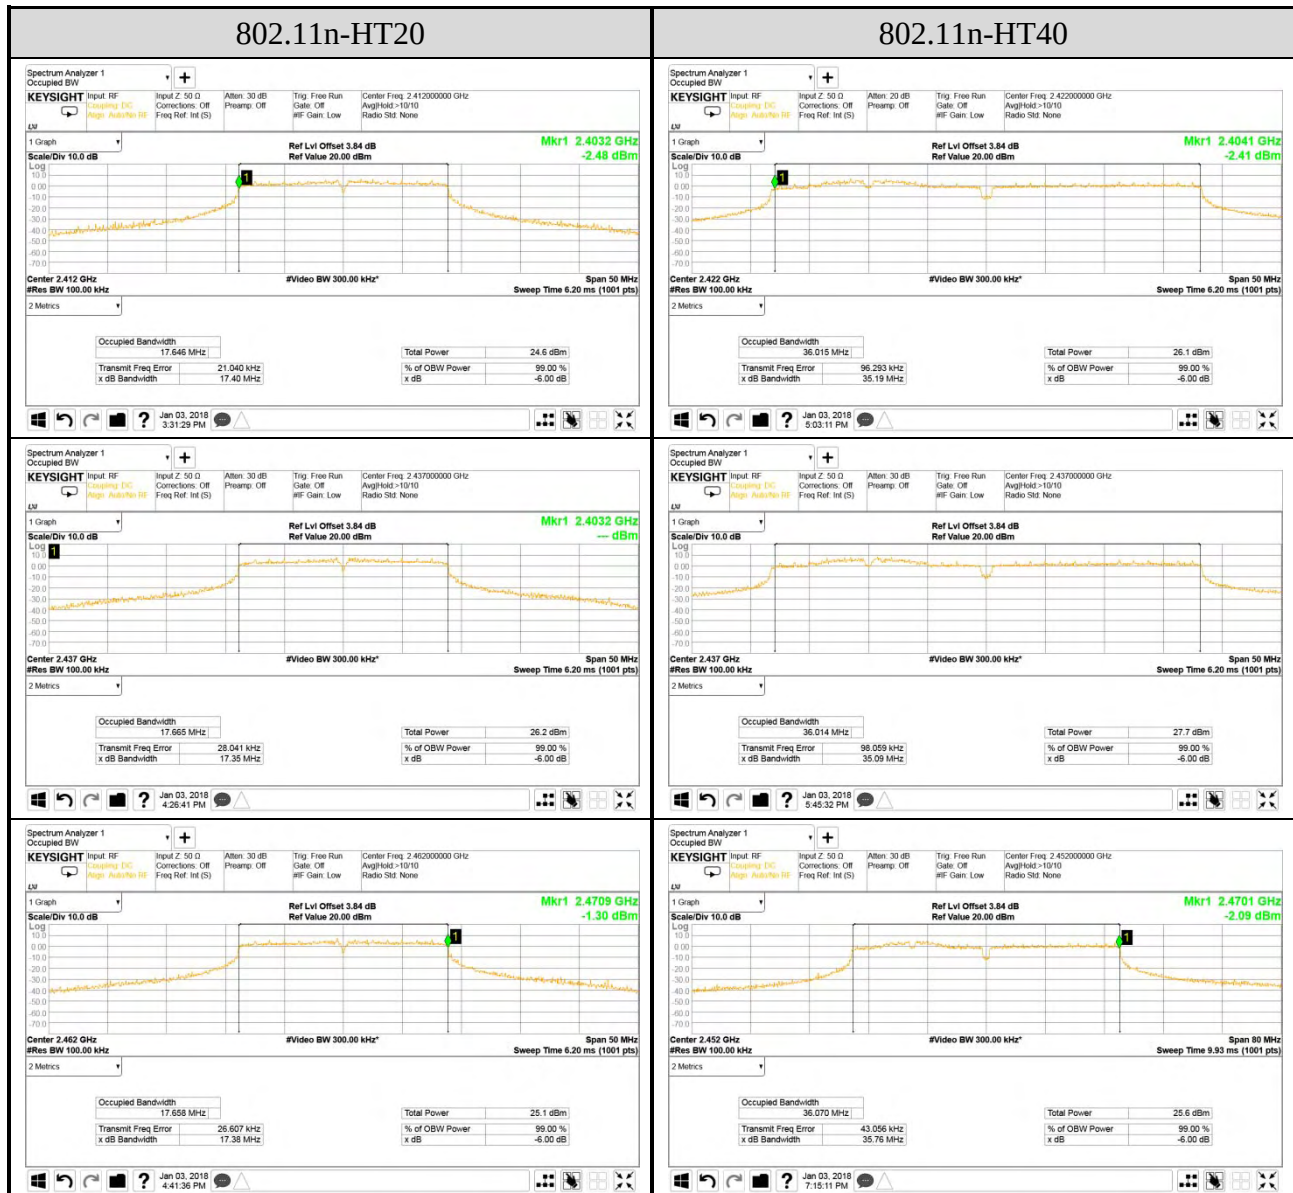

3. 峰值輸出功率之量測

測試日期	2018/02/09	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)		

3.1. 峰值輸出功率

● No. 1 Omni Antenna (M/N ANT792-6MN)

模式	測試頻率	Peak輸出功率(dBm)		Total Peak輸出功率	限制值 (dBm)
	(MHz)	Chain 0	Chain 1	(dBm)	
802.11b	2412	10.40	8.90	12.72	29 ^{Note}
	2417	13.09	12.10	15.63	
	2437	13.31	12.57	15.97	
	2457	13.29	12.71	16.02	
	2462	10.44	8.97	12.78	
802.11g	2412	18.56	17.95	21.28	
	2417	21.67	20.35	24.07	
	2437	21.27	20.39	23.86	
	2457	21.12	20.51	23.84	
	2462	18.45	17.74	21.12	
802.11n- HT20	2412	18.22	17.96	21.10	
	2417	20.13	20.01	23.08	
	2437	21.77	20.13	24.04	
	2457	20.82	19.95	23.42	
	2462	18.11	18.13	21.13	
802.11n- HT40	2422	18.21	16.01	20.26	
	2427	21.02	19.01	23.14	
	2437	21.07	19.20	23.25	
	2447	21.11	19.03	23.20	
	2452	18.04	16.05	20.17	

Note: Directional Gain = $6+10\log(2)=9.01\text{dBi}$; 限制值(dBm)= $30-(9.01-6)/3=29$

● No. 3 Sector Antenna (M/N ANT795-6DC)

模式	測試頻率	Peak輸出功率(dBm)		Total Peak輸出功率 (dBm)	限制值 (dBm)
	(MHz)	Chain 0	Chain 1		
802.11b	2412	4.78	3.54	7.21	28 ^{Note}
	2417	8.49	6.59	10.65	
	2437	7.76	6.26	10.08	
	2457	7.52	6.76	10.17	
	2462	4.83	3.76	7.34	
802.11g	2412	13.25	11.95	15.66	
	2417	15.52	14.02	17.84	
	2437	15.53	14.23	17.94	
	2457	15.57	14.87	18.24	
	2462	12.54	12.21	15.39	
802.11n- HT20	2412	12.18	10.12	14.28	
	2417	15.02	14.04	17.57	
	2437	15.21	13.55	17.47	
	2457	15.01	14.05	17.57	
	2462	11.27	11.13	14.21	
802.11n- HT40	2422	12.08	11.32	14.73	
	2427	15.07	12.17	16.87	
	2437	15.12	12.21	16.91	
	2447	15.37	12.07	17.04	
	2452	12.13	10.72	14.49	

Note: Directional Gain = $9+10\log(2)=12.01\text{dBi}$; 限制值(dBm)= $30-(12.01-6)/3=28$

● No. 5 Omni Antenna (M/N ANT795-6MN)

模式	測試頻率	Peak輸出功率(dBm)		Total Peak輸出功率 (dBm)	限制值 (dBm)
	(MHz)	Chain 0	Chain 1		
802.11b	2412	10.4	8.9	12.72	29 ^{Note}
	2417	13.09	12.1	15.63	
	2437	13.31	12.57	15.97	
	2457	13.29	12.71	16.02	
	2462	10.44	8.97	12.78	
802.11g	2412	18.56	17.95	21.28	
	2417	21.67	20.35	24.07	
	2437	21.27	20.39	23.86	
	2457	21.12	20.51	23.84	
	2462	18.45	17.74	21.12	
802.11n- HT20	2412	18.22	17.96	21.10	
	2417	20.13	20.01	23.08	
	2437	21.77	20.13	24.04	
	2457	20.82	19.95	23.42	
	2462	18.11	18.13	21.13	
802.11n- HT40	2422	18.21	16.01	20.26	
	2427	21.02	19.01	23.14	
	2437	21.07	19.2	23.25	
	2447	21.11	19.03	23.20	
	2452	18.04	16.05	20.17	

Note: Directional Gain = $6+10\log(2)=9.01\text{dBi}$; 限制值(dBm)= $30-(9.01-6)/3=29$

● No. 6 Omni Antenna (M/N ANT795-6MP)

模式	測試頻率	Peak輸出功率(dBm)		Total Peak輸出功率 (dBm)	限制值 (dBm)
	(MHz)	Chain 0	Chain 1		
802.11b	2412	12.45	11.27	14.91	29.33 ^{Note}
	2417	15.14	14.51	17.85	
	2437	15.21	14.55	17.90	
	2457	14.89	15.01	17.96	
	2462	11.57	11.93	14.76	
802.11g	2412	21.08	20.05	23.61	
	2417	22.96	22.15	25.58	
	2437	22.86	21.78	25.36	
	2457	22.07	22.11	25.10	
	2462	20.46	20.25	23.37	
802.11n- HT20	2412	19.71	19.14	22.44	
	2417	22.03	21.47	24.77	
	2437	21.93	21.64	24.80	
	2457	21.63	21.02	24.35	
	2462	18.82	19.02	21.93	
802.11n- HT40	2422	20.17	19.01	22.64	
	2427	22.18	21.02	24.65	
	2437	22.43	21.316	24.92	
	2447	22.67	21.06	24.95	
	2452	20.03	18.06	22.17	

Note: Directional Gain = $5+10\log(2)=8.01\text{dBi}$; 限制值(dBm)= $30-(8.01-6)/3=29.33$

● No. 7 Omni Antenna (M/N ANT896-6MM)

模式	測試頻率(MHz)	Peak輸出功率(dBm)	限制值(dBm)
802.11b	2412	10.4	30
	2417	13.09	
	2437	13.31	
	2457	13.29	
	2462	10.44	
802.11g	2412	18.56	
	2417	21.67	
	2437	21.27	
	2457	21.12	
	2462	18.45	
802.11n-HT20	2412	18.22	
	2417	20.13	
	2437	21.77	
	2457	20.82	
	2462	18.11	
802.11n-HT40	2422	18.21	
	2427	21.02	
	2437	21.07	
	2447	21.11	
	2452	18.04	

● No. 8 Omni Antenna (M/N ANT795-4MX)

模式	測試頻率	Peak輸出功率(dBm)		Total Peak輸出功率 (dBm)	限制值 (dBm)
	(MHz)	Chain 0	Chain 1		
802.11b	2412	17.01	15.42	19.30	30
	2417	16.67	15.16	18.99	
	2437	16.98	15.51	19.32	
	2457	16.21	15.2	18.74	
	2462	15.25	14.44	17.87	
802.11g	2412	22.44	22.31	25.39	
	2417	22.83	22.15	25.51	
	2437	23.37	22.83	26.12	
	2457	23.21	22.94	26.09	
	2462	20.46	20.25	23.37	
802.11n- HT20	2412	21.14	20.26	23.73	
	2417	22.03	21.1	24.60	
	2437	23.62	21.06	25.54	
	2457	22.04	21.96	25.01	
	2462	18.96	19.05	22.02	
802.11n- HT40	2422	20.39	19.42	22.94	
	2427	20.49	19.57	23.06	
	2437	20.36	19.86	23.13	
	2447	20.57	19.18	22.94	
	2452	19.41	18.97	22.21	

● No. 9 Omni Antenna (M/N ANT795-4MC)

模式	測試頻率	Peak輸出功率(dBm)		Total Peak輸出功率 (dBm)	限制值 (dBm)
	(MHz)	Chain 0	Chain 1		
802.11b	2412	16.48	15.49	19.02	30
	2417	16.67	15.16	18.99	
	2437	16.77	15.27	19.09	
	2457	16.21	15.2	18.74	
	2462	15.25	14.44	17.87	
802.11g	2412	21.79	21.49	24.65	
	2417	22.83	22.15	25.51	
	2437	23.37	22.83	26.12	
	2457	23.35	22.74	26.07	
	2462	22.37	22.72	25.56	
802.11n- HT20	2412	22.61	22.4	25.52	
	2417	23.01	22.27	25.67	
	2437	23.38	22.56	26.00	
	2457	23.25	22.61	25.95	
	2462	21.71	22.19	24.97	
802.11n- HT40	2422	21.02	20.14	23.61	
	2427	21.78	20.25	24.09	
	2437	22.19	20.58	24.47	
	2447	22.15	20.48	24.41	
	2452	21.41	20.16	23.84	

● No. 10 Omni Antenna (M/N ANT795-4MD)

模式	測試頻率	Peak輸出功率(dBm)		Total Peak輸出功率 (dBm)	限制值 (dBm)
	(MHz)	Chain 0	Chain 1		
802.11b	2412	17.04	15.18	19.22	30
	2417	16.69	15.63	19.20	
	2437	16.72	15.69	19.25	
	2457	16.21	15.2	18.74	
	2462	15.92	16.34	19.15	
802.11g	2412	22.44	22.31	25.39	
	2417	23.41	23.29	26.36	
	2437	23.45	23.21	26.34	
	2457	23.34	23.72	26.54	
	2462	22.37	22.72	25.56	
802.11n- HT20	2412	22.61	22.4	25.52	
	2417	23.83	23.45	26.65	
	2437	23.62	23.08	26.37	
	2457	23.52	23.81	26.68	
	2462	21.71	22.19	24.97	
802.11n- HT40	2422	22.01	20.26	24.23	
	2427	21.78	20.25	24.09	
	2437	22.24	20.47	24.45	
	2447	20.28	20.36	23.33	
	2452	21.51	19.87	23.78	

● No. 11 Omni Antenna (M/N ANT492-4DN)

模式	測試頻率(MHz)	Peak輸出功率(dBm)	限制值(dBm)
802.11b	2412	14.44	30
	2417	18.01	
	2437	18.84	
	2457	17.25	
	2462	13.76	
802.11g	2412	21.79	
	2417	23.09	
	2437	23.29	
	2457	23.19	
	2462	21.32	
802.11n-HT20	2412	21.02	
	2417	22.97	
	2437	23.02	
	2457	23.08	
	2462	21.02	
802.11n-HT40	2422	21.52	
	2427	21.78	
	2437	22.32	
	2447	22.22	
	2452	21.04	

● No. 13 Omni Antenna (M/N ANT795-4MB)

模式	測試頻率	Peak輸出功率(dBm)		Total Peak輸出功率 (dBm)	限制值 (dBm)
	(MHz)	Chain 0	Chain 1		
802.11b	2412	16.48	15.31	18.94	30
	2417	16.67	15.16	18.99	
	2437	16.71	15.04	18.97	
	2457	16.46	15.52	19.03	
	2462	15.25	14.44	17.87	
802.11g	2412	22.81	22.33	25.59	
	2417	22.83	22.15	25.51	
	2437	23.37	22.85	26.13	
	2457	23.57	23.01	26.31	
	2462	22.83	22.67	25.76	
802.11n- HT20	2412	23.16	22.74	25.97	
	2417	23.83	23.45	26.65	
	2437	23.62	23.08	26.37	
	2457	23.52	23.81	26.68	
	2462	22.02	21.84	24.94	
802.11n- HT40	2422	22.43	21.94	25.20	
	2427	22.84	22.17	25.53	
	2437	23.87	23.13	26.53	
	2447	22.42	20.64	24.63	
	2452	22.23	20.95	24.65	

● No. 14 Omni Antenna (M/N ANT795-4MA)

模式	測試頻率	Peak輸出功率(dBm)		Total Peak輸出功率 (dBm)	限制值 (dBm)
	(MHz)	Chain 0	Chain 1		
802.11b	2412	16.59	15.24	18.98	30
	2417	16.69	15.06	18.96	
	2437	16.47	15.06	18.83	
	2457	16.64	15.28	19.02	
	2462	15.92	15.25	18.61	
802.11g	2412	22.09	21.14	24.65	
	2417	23.41	23.29	26.36	
	2437	23.45	23.21	26.34	
	2457	23.34	23.72	26.54	
	2462	22.37	22.72	25.56	
802.11n- HT20	2412	22.61	22.4	25.52	
	2417	23.01	22.27	25.67	
	2437	23.38	22.56	26.00	
	2457	23.42	22.76	26.11	
	2462	21.71	22.19	24.97	
802.11n- HT40	2422	21.02	20.14	23.61	
	2427	21.78	20.25	24.09	
	2437	22.23	20.52	24.47	
	2447	22.16	20.42	24.39	
	2452	21.41	20.16	23.84	

● No. 15 Omni Antenna (M/N ANT795-6MT)

模式	測試頻率	Peak輸出功率(dBm)		Total Peak輸出功率 (dBm)	限制值 (dBm)
	(MHz)	Chain 0	Chain 1		
802.11b	2412	14.44	13.99	17.23	29.66 ^{Note}
	2417	16.69	15.06	18.96	
	2437	16.77	15.27	19.09	
	2457	16.21	15.26	18.77	
	2462	13.76	14.13	16.96	
802.11g	2412	21.79	21.49	24.65	
	2417	23.09	23.33	26.22	
	2437	23.29	23.25	26.28	
	2457	23.19	21.13	25.29	
	2462	21.32	21.95	24.66	
802.11n- HT20	2412	21.02	20.61	23.83	
	2417	22.97	22.87	25.93	
	2437	23.02	22.91	25.98	
	2457	23.08	23.01	26.06	
	2462	21.02	21.61	24.34	
802.11n- HT40	2422	21.52	20.05	23.86	
	2427	21.78	20.25	24.09	
	2437	22.02	20.22	24.22	
	2447	22.42	20.64	24.63	
	2452	21.04	20.36	23.72	

Note: Directional Gain= $4+10\log(2)=7.01\text{dBi}$; 限制值(dBm)= $30-(7.01-6)/3=29.66$

3.2. 平均輸出功率(參考用)

● No. 1 Omni Antenna (M/N ANT792-6MN)

模式	測試頻率	Duty Cycle (X)	Average輸出功率(dBm)		10log (1/X)	Total Average輸出功率 (dBm)
	(MHz)		Chain 0	Chain 1		
802.11b	2412	0.99	8.17	6.75	0.04	10.57
	2417		10.91	9.90		13.49
	2437		11.14	10.33		13.81
	2457		11.11	10.46		13.85
	2462		8.20	6.75		10.59
802.11g	2412	0.94	7.98	7.37	0.27	10.96
	2417		11.44	10.95		14.48
	2437		10.94	10.06		13.80
	2457		10.95	10.04		13.80
	2462		7.96	7.20		10.88
802.11n- HT20	2412	0.77	7.54	7.07	1.14	11.46
	2417		9.81	9.02		13.58
	2437		10.32	9.67		14.15
	2457		10.22	9.63		14.08
	2462		7.12	7.16		11.29
802.11n- HT40	2422	0.65	6.94	5.01	1.87	10.96
	2427		9.64	8.06		13.80
	2437		9.71	8.14		13.88
	2447		9.65	8.12		13.83
	2452		6.64	5.13		10.83

註：當 Duty cycle<98%，最大輸出功率必需要加上 duty cycle factor $10\log(1/x)$ 。(x=duty cycle)

● No. 3 Sector Antenna (M/N ANT795-6DC)

模式	測試頻率	Duty Cycle (X)	Average輸出功率(dBm)		10log (1/X)	Total Average輸出功率 (dBm)
	(MHz)		Chain 0	Chain 1		
802.11b	2412	0.99	2.4	1.57	0.04	5.06
	2417		6.12	3.74		8.14
	2437		5.42	3.92		7.79
	2457		5.32	4.43		7.95
	2462		2.62	1.46		5.13
802.11g	2412	0.94	2.94	0.93	0.27	5.33
	2417		4.98	3.54		7.60
	2437		5.07	3.47		7.62
	2457		4.84	4.15		7.79
	2462		2.11	1.56		5.12
802.11n- HT20	2412	0.77	1.57	0.07	1.14	5.03
	2417		4.37	3.02		7.89
	2437		4.56	3.04		8.01
	2457		4.18	3.09		7.81
	2462		0.72	0.65		4.83
802.11n- HT40	2422	0.65	1.47	0.24	1.87	5.78
	2427		4.03	1.31		7.76
	2437		3.81	1.21		7.58
	2447		3.87	1.31		7.66
	2452		1.1	-0.78		5.14

註：當 Duty cycle<98%，最大輸出功率必需要加上 duty cycle factor 10log(1/x)。(x=duty cycle)

● No. 5 Omni Antenna (M/N ANT795-6MN)

模式	測試頻率	Duty Cycle (X)	Average輸出功率(dBm)		10log (1/X)	Total Average輸出功率 (dBm)
	(MHz)		Chain 0	Chain 1		
802.11b	2412	0.99	8.17	6.75	0.04	10.57
	2417		10.91	9.90		13.49
	2437		11.14	10.33		13.81
	2457		11.11	10.46		13.85
	2462		8.20	6.75		10.59
802.11g	2412	0.94	7.98	7.37	0.27	10.96
	2417		11.44	10.95		14.48
	2437		10.94	10.06		13.80
	2457		10.95	10.04		13.80
	2462		7.96	7.20		10.88
802.11n- HT20	2412	0.77	7.54	7.07	1.14	11.46
	2417		9.81	9.02		13.58
	2437		10.32	9.67		14.15
	2457		10.22	9.63		14.08
	2462		7.12	7.16		11.29
802.11n- HT40	2422	0.65	6.94	5.01	1.87	10.96
	2427		9.64	8.06		13.80
	2437		9.71	8.14		13.88
	2447		9.65	8.12		13.83
	2452		6.64	5.13		10.83

註：當 Duty cycle<98%，最大輸出功率必需要加上 duty cycle factor 10log(1/x)。(x=duty cycle)

● No. 6 Omni Antenna (M/N ANT795-6MP)

模式	測試頻率	Duty Cycle (X)	Average輸出功率(dBm)		10log (1/X)	Total Average輸出功率 (dBm)
	(MHz)		Chain 0	Chain 1		
802.11b	2412	0.99	10.05	9.02	0.04	12.62
	2417		12.78	12.23		15.57
	2437		12.84	12.26		15.61
	2457		12.52	12.65		15.64
	2462		9.25	9.67		12.52
802.11g	2412	0.94	10.45	9.51	0.27	13.28
	2417		13.13	11.96		15.86
	2437		12.88	11.52		15.53
	2457		12.22	12.48		15.63
	2462		9.95	9.71		13.11
802.11n- HT20	2412	0.77	8.75	8.23	1.14	12.64
	2417		11.94	11.14		15.70
	2437		11.57	11.23		15.55
	2457		11.36	11.16		15.41
	2462		8.25	8.45		12.50
802.11n- HT40	2422	0.65	8.74	7.57	1.87	13.08
	2427		11.81	10.13		15.93
	2437		11.97	10.23		16.07
	2447		12.03	9.74		15.92
	2452		8.74	7.52		13.05

註：當 Duty cycle<98%，最大輸出功率必需要加上 duty cycle factor 10log(1/x)。(x=duty cycle)

● No. 7 Omni Antenna (M/N ANT896-6MM)

模式	測試頻率 (MHz)	Duty Cycle (X)	Average輸出功率 (dBm)	10log (1/X)	Total Average輸出功率 (dBm)
802.11b	2412	0.99	8.17	0.04	8.21
	2417		10.91		10.95
	2437		11.14		11.18
	2457		11.11		11.15
	2462		8.2		8.24
802.11g	2412	0.94	7.98	0.27	8.25
	2417		11.44		11.71
	2437		10.94		11.21
	2457		10.95		11.22
	2462		7.96		8.23
802.11n- HT20	2412	0.77	7.54	1.14	8.68
	2417		9.81		10.95
	2437		10.32		11.46
	2457		10.22		11.36
	2462		7.12		8.26
802.11n- HT40	2422	0.65	6.94	1.87	8.81
	2427		9.64		11.51
	2437		9.71		11.58
	2447		9.65		11.52
	2452		6.64		8.51

註：當 Duty cycle<98%，最大輸出功率 必需要加上 duty cycle factor 10log(1/x)。 (x=duty cycle)

● No. 8 Omni Antenna (M/N ANT795-4MX)

模式	測試頻率	Duty Cycle (X)	Average輸出功率(dBm)		10log (1/X)	Total Average輸出功率 (dBm)
	(MHz)		Chain 0	Chain 1		
802.11b	2412	0.99	14.11	13.39	0.04	16.82
	2417		14.38	12.83		16.73
	2437		14.42	13.04		16.84
	2457		13.86	12.83		16.43
	2462		12.87	12.07		15.54
802.11g	2412	0.94	13.7	13.22	0.27	16.75
	2417		14.51	13.56		17.34
	2437		14.85	14.13		17.78
	2457		14.9	13.96		17.73
	2462		9.95	9.97		13.24
802.11n- HT20	2412	0.77	10.45	9.67	1.14	14.22
	2417		12.14	11.15		15.82
	2437		11.94	11.11		15.69
	2457		12.34	11.97		16.30
	2462		7.64	8.23		12.09
802.11n- HT40	2422	0.65	9.73	8.75	1.87	14.15
	2427		9.57	8.98		14.17
	2437		9.57	9.06		14.20
	2447		9.01	7.67		13.27
	2452		8.17	7.62		12.78

註：當 Duty cycle<98%，最大輸出功率必需要加上 duty cycle factor 10log(1/x)。(x=duty cycle)

● No. 9 Omni Antenna (M/N ANT795-4MC)

模式	測試頻率	Duty Cycle (X)	Average輸出功率(dBm)		10log (1/X)	Total Average輸出功率 (dBm)
	(MHz)		Chain 0	Chain 1		
802.11b	2412	0.99	14.06	13.28	0.04	16.74
	2417		14.38	12.83		16.73
	2437		14.42	12.94		16.80
	2457		13.86	12.83		16.43
	2462		12.87	12.07		15.54
802.11g	2412	0.94	11.91	11.26	0.27	14.88
	2417		14.51	13.56		17.34
	2437		14.85	13.82		17.64
	2457		14.74	13.86		17.60
	2462		13.3	13.68		16.77
802.11n- HT20	2412	0.77	13.66	12.78	1.14	17.39
	2417		14.25	13.17		17.89
	2437		14.65	13.47		18.25
	2457		14.54	13.52		18.21
	2462		11.75	12.58		16.33
802.11n- HT40	2422	0.65	10.84	9.56	1.87	15.13
	2427		11.09	9.12		15.10
	2437		11.27	9.02		15.17
	2447		11.36	8.74		15.13
	2452		10.31	9.37		14.75

註：當 Duty cycle<98%，最大輸出功率必需要加上 duty cycle factor 10log(1/x)。(x=duty cycle)

● No. 10 Omni Antenna (M/N ANT795-4MD)

模式	測試頻率	Duty Cycle (X)	Average輸出功率(dBm)		10log (1/X)	Total Average輸出功率 (dBm)
	(MHz)		Chain 0	Chain 1		
802.11b	2412	0.99	13.98	13.45	0.04	16.78
	2417		14.38	12.83		16.73
	2437		14.46	12.98		16.84
	2457		13.86	12.83		16.43
	2462		13.44	13.94		16.75
802.11g	2412	0.94	13.7	13.22	0.27	16.75
	2417		16.17	16.15		19.44
	2437		16.22	16.11		19.44
	2457		15.84	16.01		19.20
	2462		13.3	13.68		16.77
802.11n- HT20	2412	0.77	13.66	12.78	1.14	17.39
	2417		16.24	15.96		20.25
	2437		16.1	15.74		20.07
	2457		15.75	15.8		19.92
	2462		11.75	12.58		16.33
802.11n- HT40	2422	0.65	10.7	8.75	1.87	14.71
	2427		11.09	9.12		15.10
	2437		11.38	9.24		15.32
	2447		11.36	8.84		15.16
	2452		10.64	8.36		14.53

註：當 Duty cycle<98%，最大輸出功率必需要加上 duty cycle factor $10\log(1/x)$ 。(x=duty cycle)

● No. 11 Omni Antenna (M/N ANT792-4DN)

模式	測試頻率 (MHz)	Duty Cycle (X)	Average輸出功率 (dBm)	10log (1/X)	Total Average輸出功率 (dBm)
802.11b	2412	0.99	12.11	0.04	12.15
	2417		15.17		15.21
	2437		15.91		15.95
	2457		15.21		15.25
	2462		11.26		11.30
802.11g	2412	0.94	11.91	0.27	12.18
	2417		14.54		14.81
	2437		14.62		14.89
	2457		14.74		15.01
	2462		11.24		11.51
802.11n- HT20	2412	0.77	10.97	1.14	12.11
	2417		14.15		15.29
	2437		14.4		15.54
	2457		14.23		15.37
	2462		10.78		11.92
802.11n- HT40	2422	0.65	11.17	1.87	13.04
	2427		11.09		12.96
	2437		11.45		13.32
	2447		11.36		13.23
	2452		10.46		12.33

註：當 Duty cycle<98%，最大輸出功率 必需要加上 duty cycle factor $10\log(1/x)$ 。(x=duty cycle)

● No. 13 Omni Antenna (M/N ANT795-4MB)

模式	測試頻率	Duty Cycle (X)	Average輸出功率(dBm)		10log (1/X)	Total Average輸出功率 (dBm)
	(MHz)		Chain 0	Chain 1		
802.11b	2412	0.99	13.87	13.26	0.04	16.63
	2417		14.28	12.75		16.64
	2437		14.02	12.84		16.52
	2457		14.01	13.16		16.66
	2462		12.87	12.07		15.54
802.11g	2412	0.94	13.92	13.46	0.27	16.98
	2417		14.51	13.56		17.34
	2437		14.85	13.82		17.64
	2457		14.96	14.11		17.83
	2462		13.76	13.55		16.94
802.11n- HT20	2412	0.77	16.68	14.1	1.14	19.72
	2417		16.04	15.42		19.89
	2437		16.01	15.52		19.92
	2457		15.89	15.8		19.99
	2462		11.91	11.94		16.07
802.11n- HT40	2422	0.65	12.96	11.24	1.87	17.07
	2427		13.58	11.93		17.71
	2437		16.51	14.64		20.56
	2447		11.59	9.47		15.54
	2452		12.74	10.39		16.60

註：當 Duty cycle<98%，最大輸出功率必需要加上 duty cycle factor 10log(1/x)。(x=duty cycle)

● No. 14 Omni Antenna (M/N ANT795-4MA)

模式	測試頻率	Duty Cycle (X)	Average輸出功率(dBm)		10log (1/X)	Total Average輸出功率 (dBm)
	(MHz)		Chain 0	Chain 1		
802.11b	2412	0.99	14.11	13.56	0.04	16.90
	2417		16.83	15.83		19.41
	2437		16.7	15.73		19.30
	2457		16.61	16.21		19.47
	2462		13.62	14.07		16.90
802.11g	2412	0.94	13.7	13.22	0.27	16.75
	2417		16.17	16.15		19.44
	2437		16.22	16.11		19.44
	2457		15.84	16.01		19.20
	2462		13.3	13.68		16.77
802.11n- HT20	2412	0.77	13.66	12.78	1.14	17.39
	2417		16.24	15.96		20.25
	2437		16.1	15.74		20.07
	2457		15.75	15.8		19.92
	2462		11.75	12.58		16.33
802.11n- HT40	2422	0.65	12.96	11.24	1.87	17.07
	2427		15.18	15.16		20.05
	2437		15.92	14.33		20.08
	2447		15.48	13.71		19.57
	2452		12.74	10.39		16.60

註：當 Duty cycle<98%，最大輸出功率必需要加上 duty cycle factor $10\log(1/x)$ 。(x=duty cycle)



● No. 15 Omni Antenna (M/N ANT795-6MT)



模式	測試頻率	Duty Cycle (X)	Average輸出功率(dBm)		10log (1/X)	Total Average輸出功率 (dBm)
	(MHz)		Chain 0	Chain 1		
802.11b	2412	0.99	12.11	11.67	0.04	14.95
	2417		14.38	12.83		16.73
	2437		14.42	12.94		16.80
	2457		13.86	12.83		16.43
	2462		11.26	11.72		14.55
802.11g	2412	0.94	11.91	11.26	0.27	14.88
	2417		14.54	14.31		17.71
	2437		14.62	14.45		17.81
	2457		14.74	14.66		17.98
	2462		11.24	12.04		14.94
802.11n- HT20	2412	0.77	10.97	10.12	1.14	14.71
	2417		14.15	14.09		18.27
	2437		14.4	13.91		18.31
	2457		14.23	14.03		18.28
	2462		10.78	11.59		15.35
802.11n- HT40	2422	0.65	11.17	9.41	1.87	15.26
	2427		11.09	9.12		15.10
	2437		11.27	9.02		15.17
	2447		11.59	8.94		15.35
	2452		10.46	9.26		14.78

註：當 Duty cycle<98%，最大輸出功率必需要加上 duty cycle factor 10log(1/x)。(x=duty cycle)

4. 帶邊緣之 RF 傳導發射之量測

測試日期	2018/01/02 ~ 03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)		

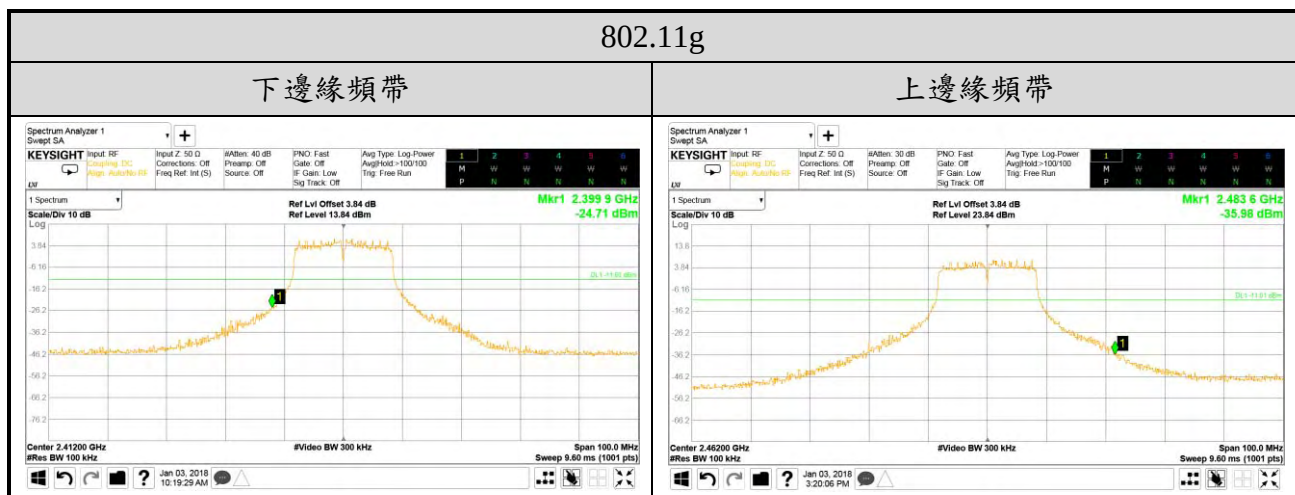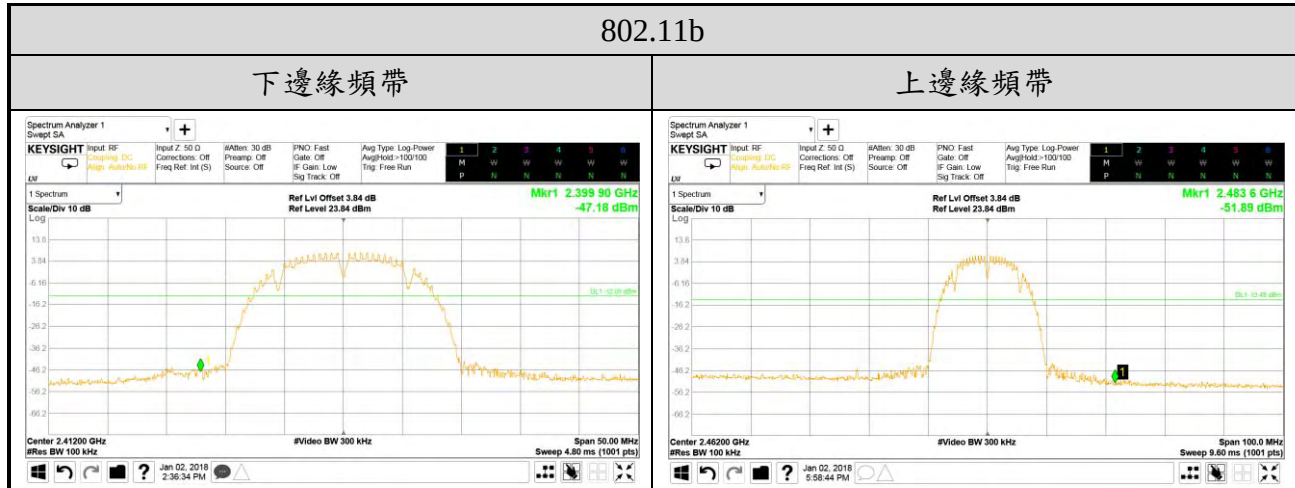

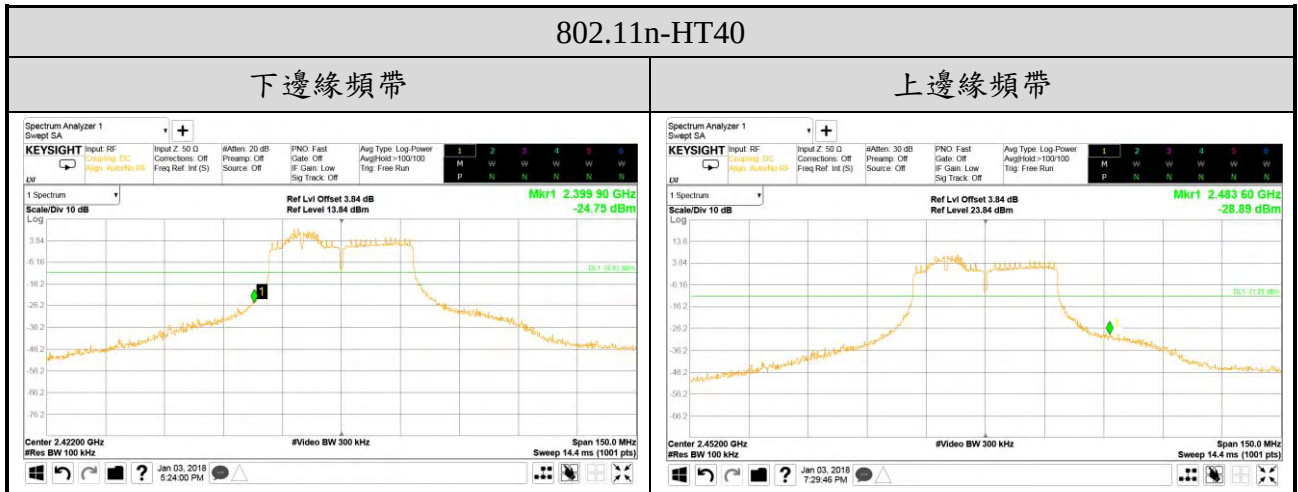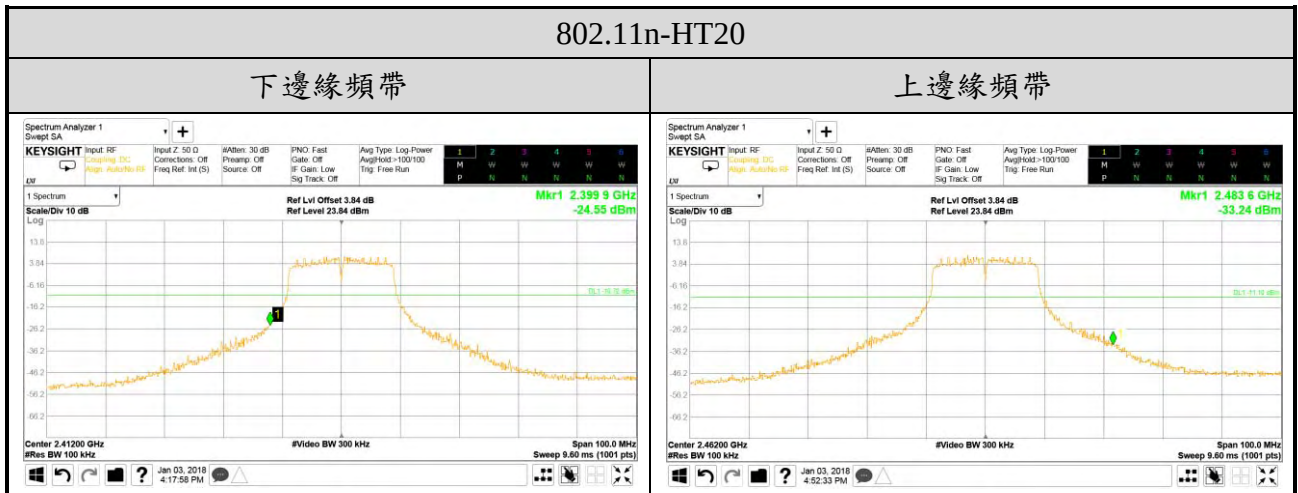

5. 混附發射之 RF 傳導發射之量測


測試日期	2018/01/02	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11b
		測試頻率	2412MHz



測試日期	2018/01/02	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11b
		測試頻率	2437MHz




測試日期	2018/01/02	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11b
		測試頻率	2462MHz

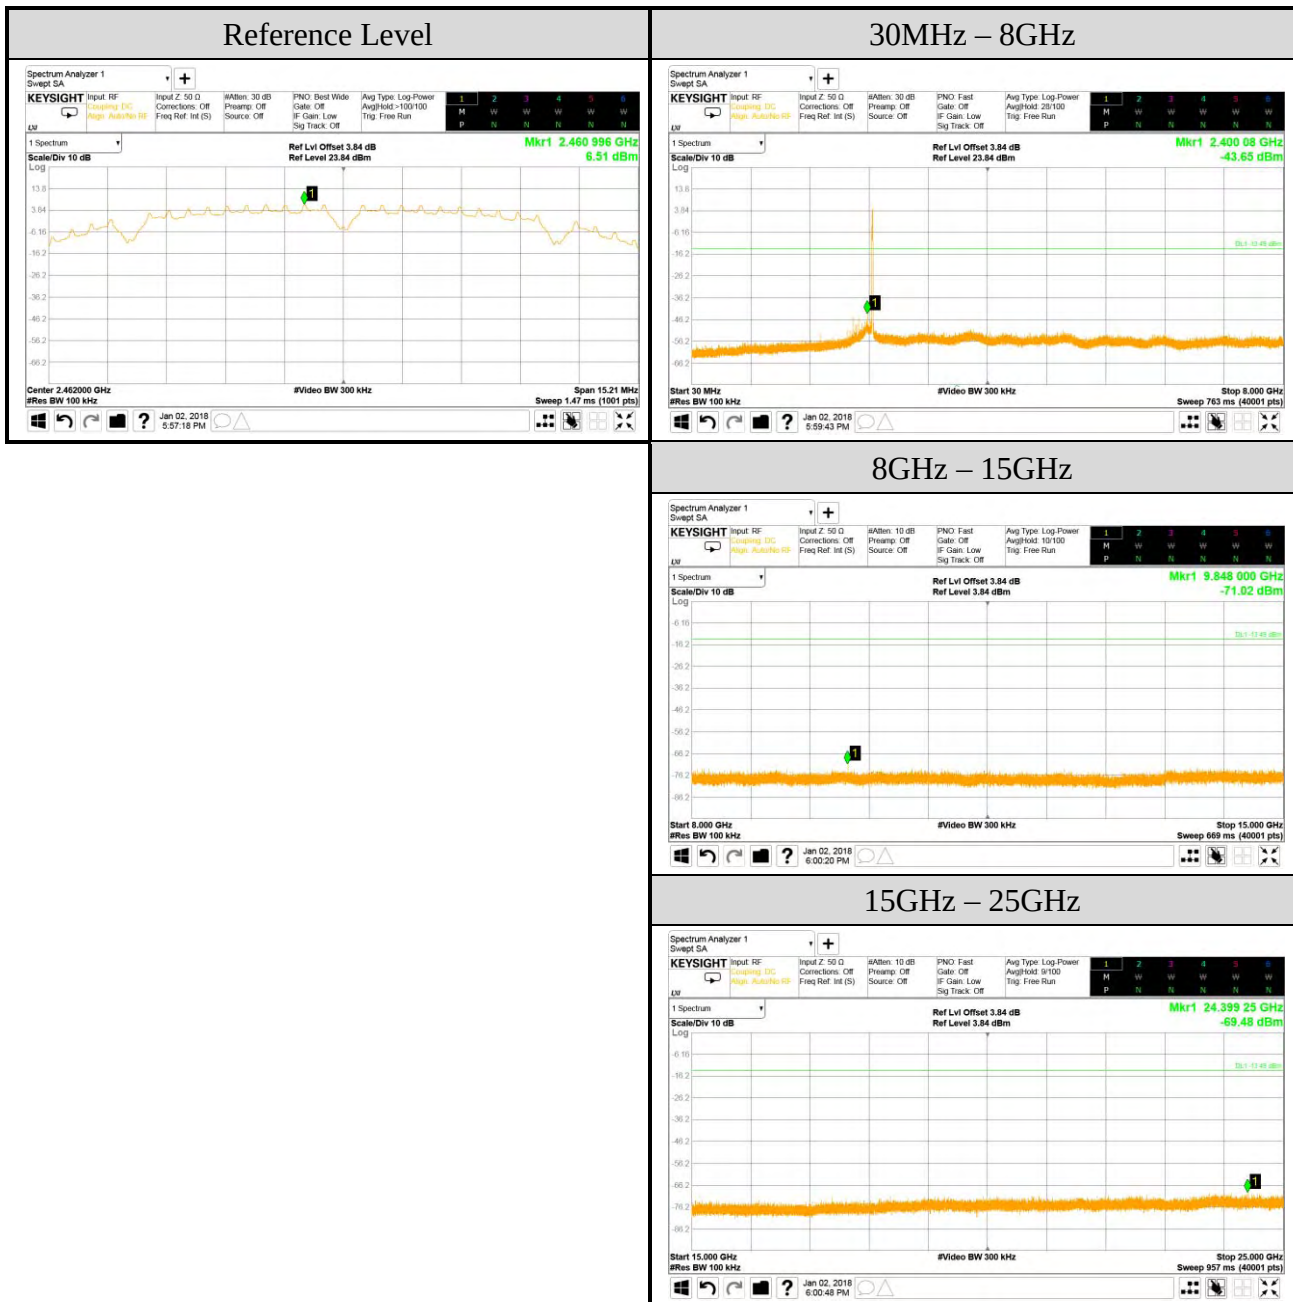


測試日期	2018/01/03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11g
		測試頻率	2412MHz




測試日期	2018/01/03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11g
		測試頻率	2437MHz

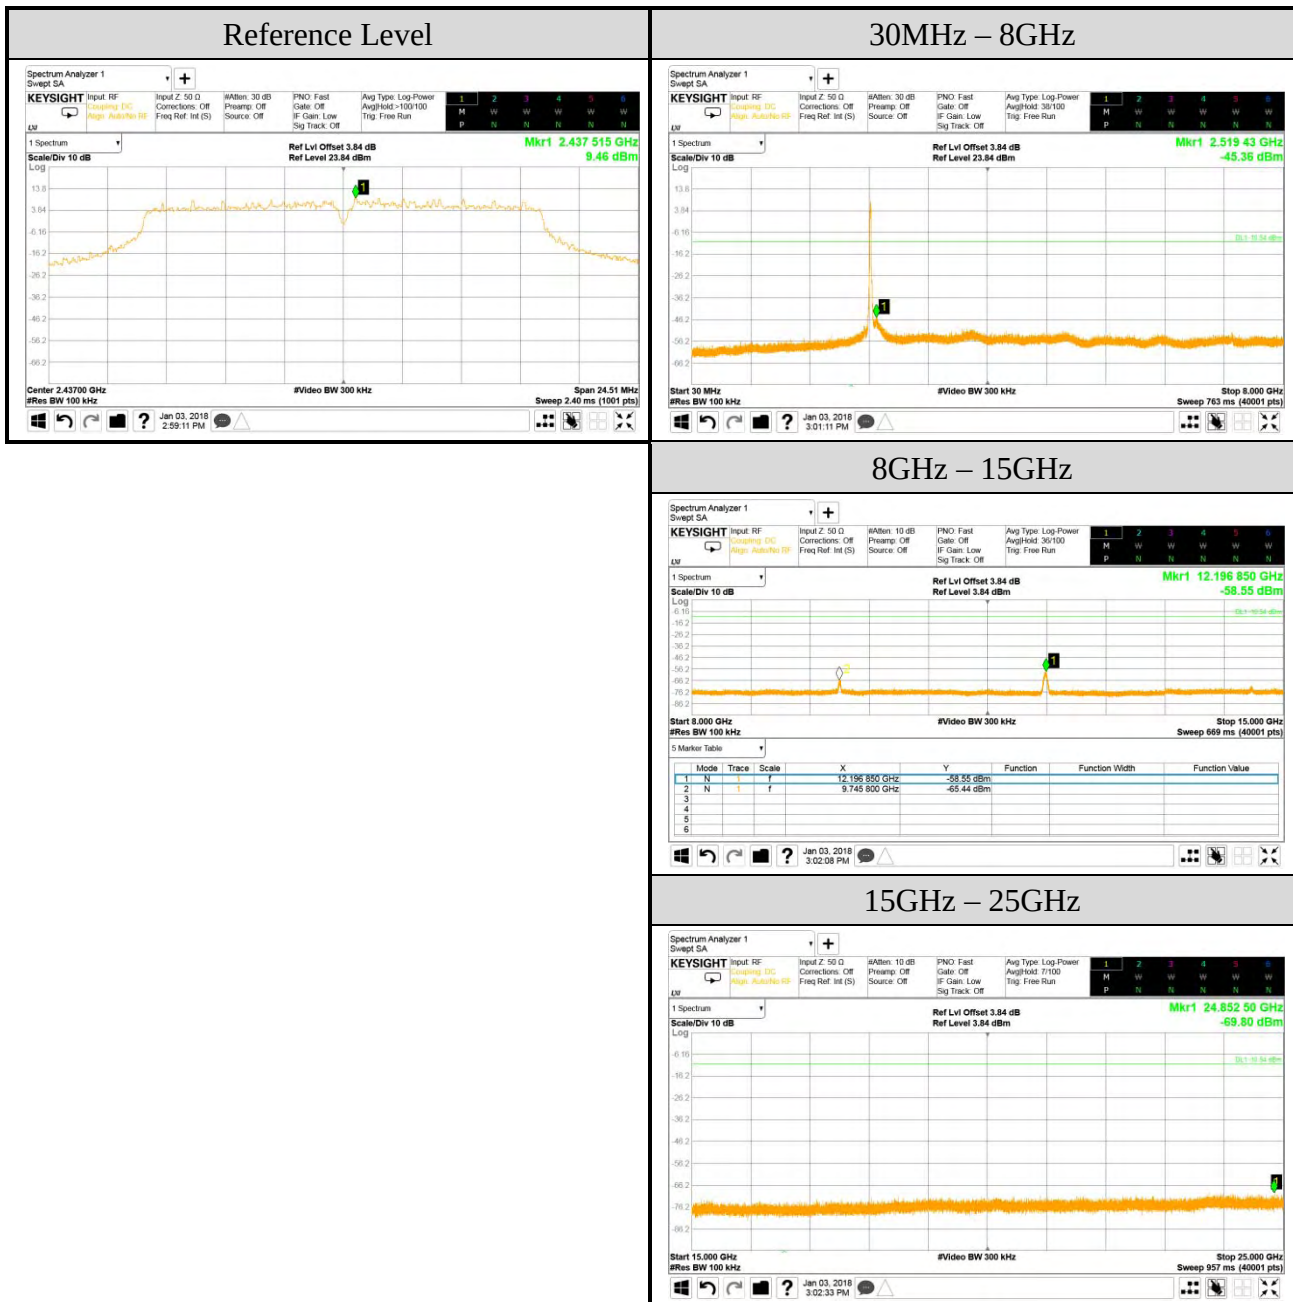


測試日期	2018/01/03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11g
		測試頻率	2462MHz

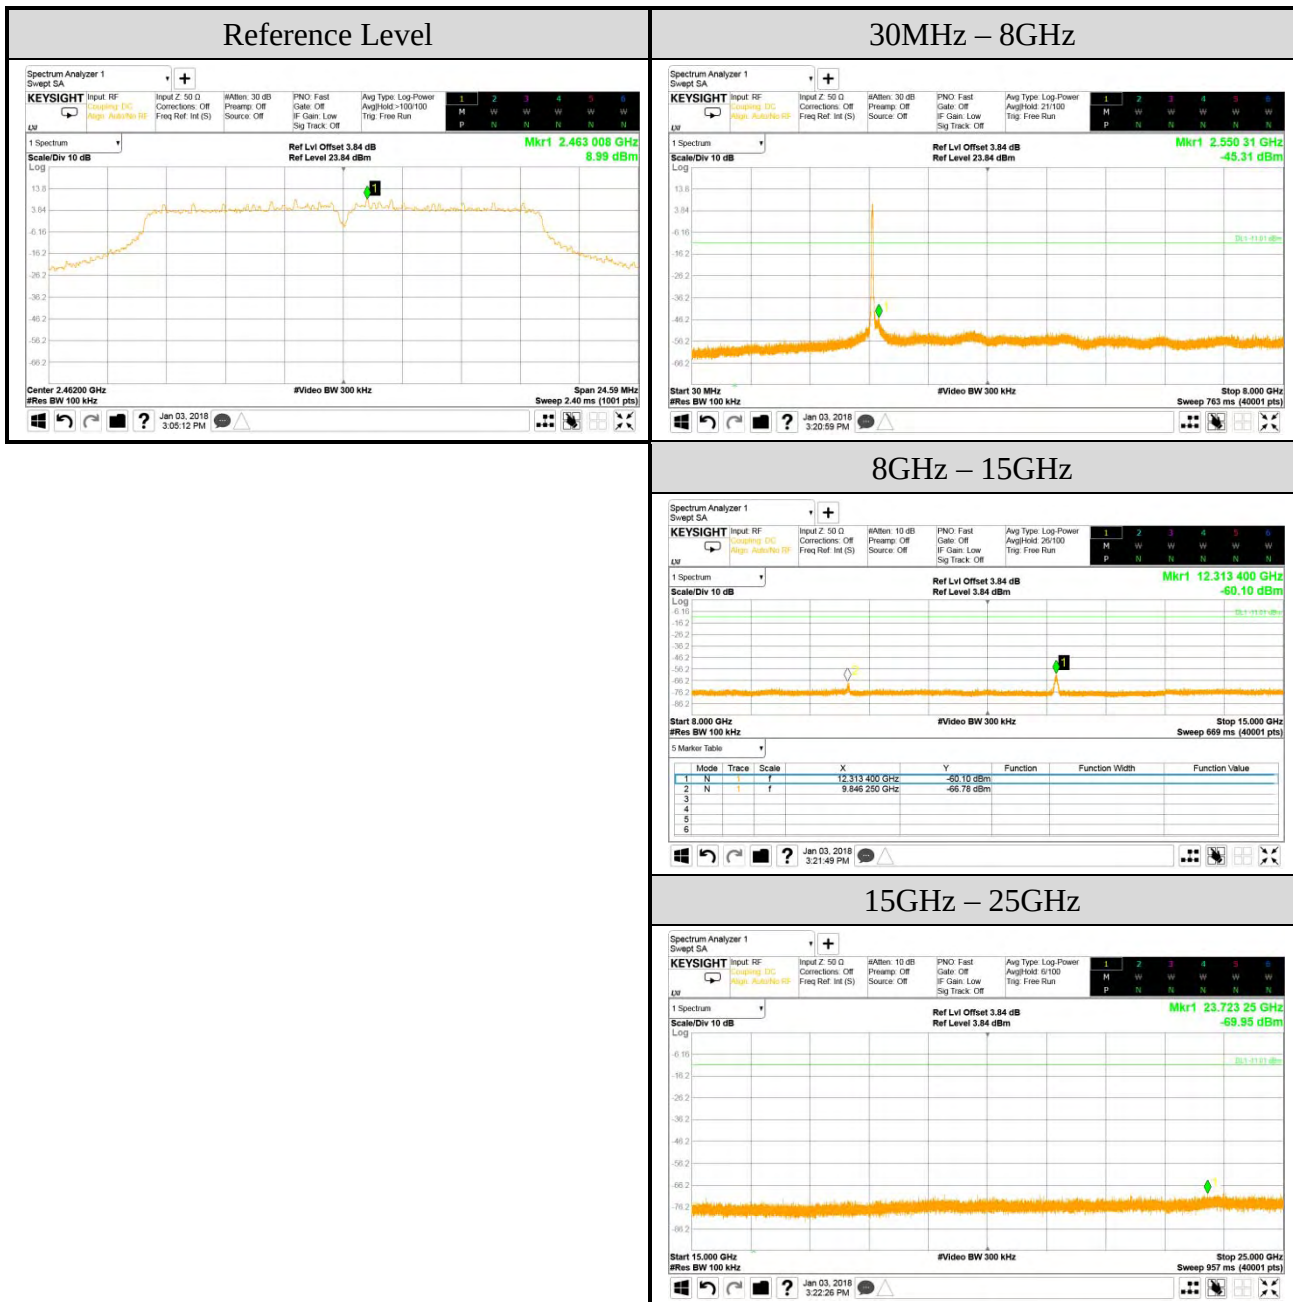


測試日期	2018/01/03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11n-HT20
		測試頻率	2412MHz

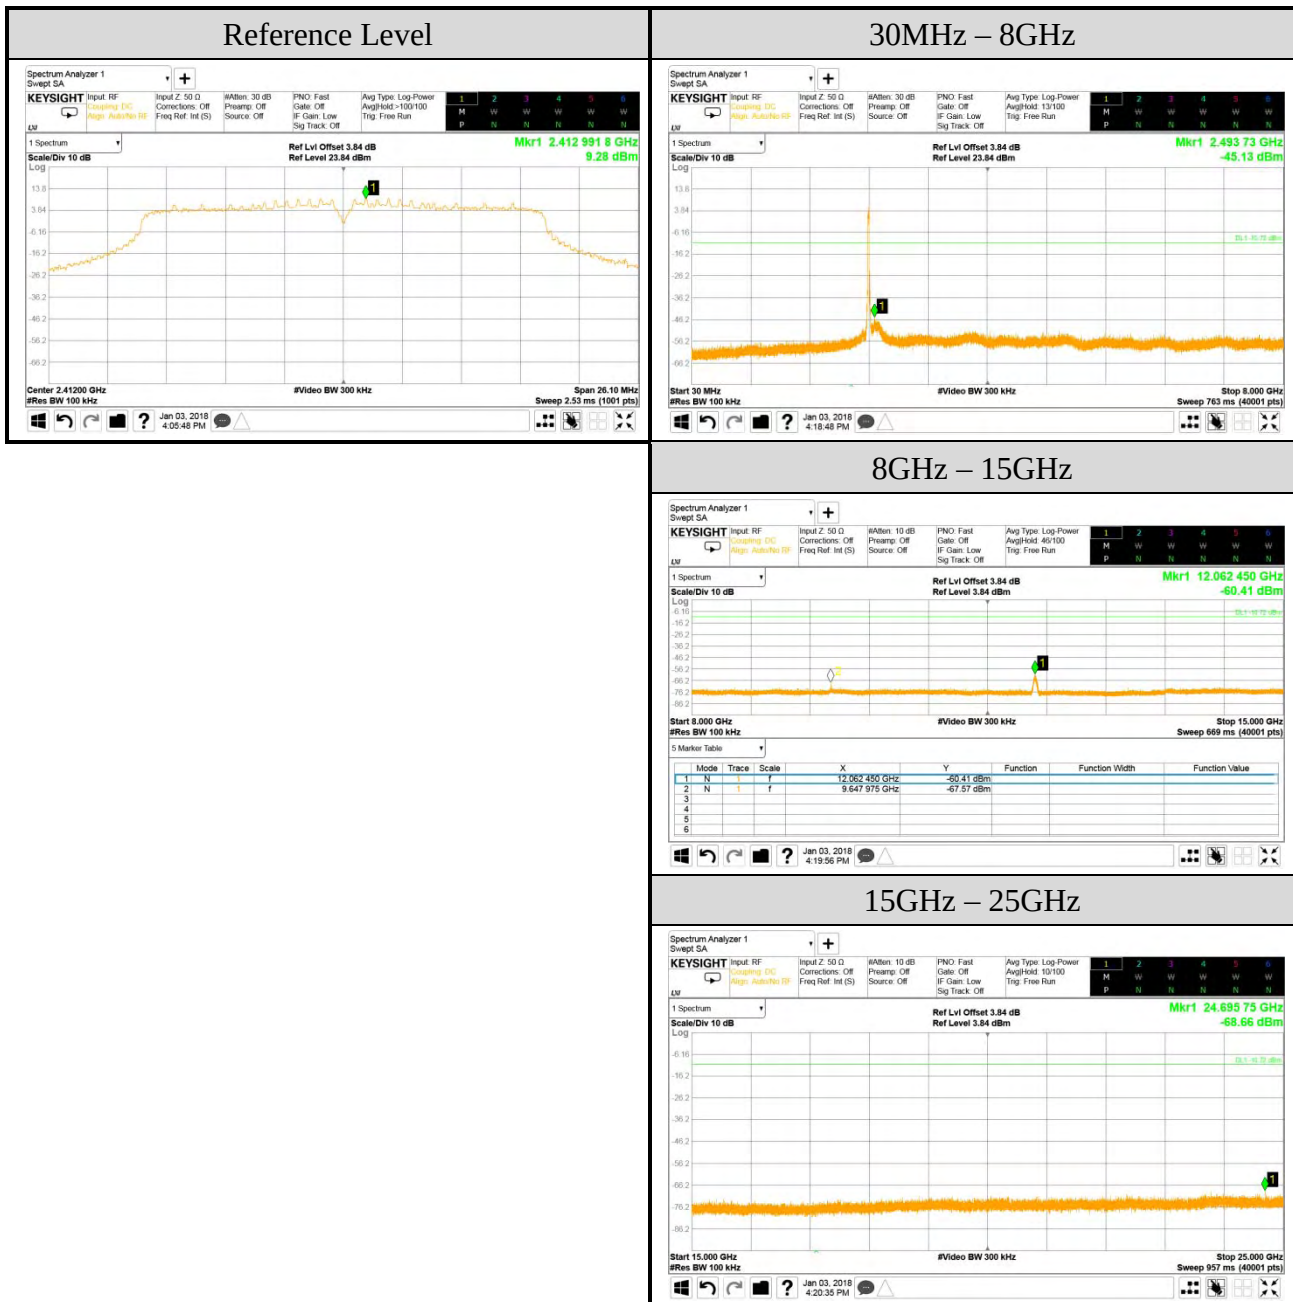


測試日期	2018/01/03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11n-HT20
		測試頻率	2437MHz

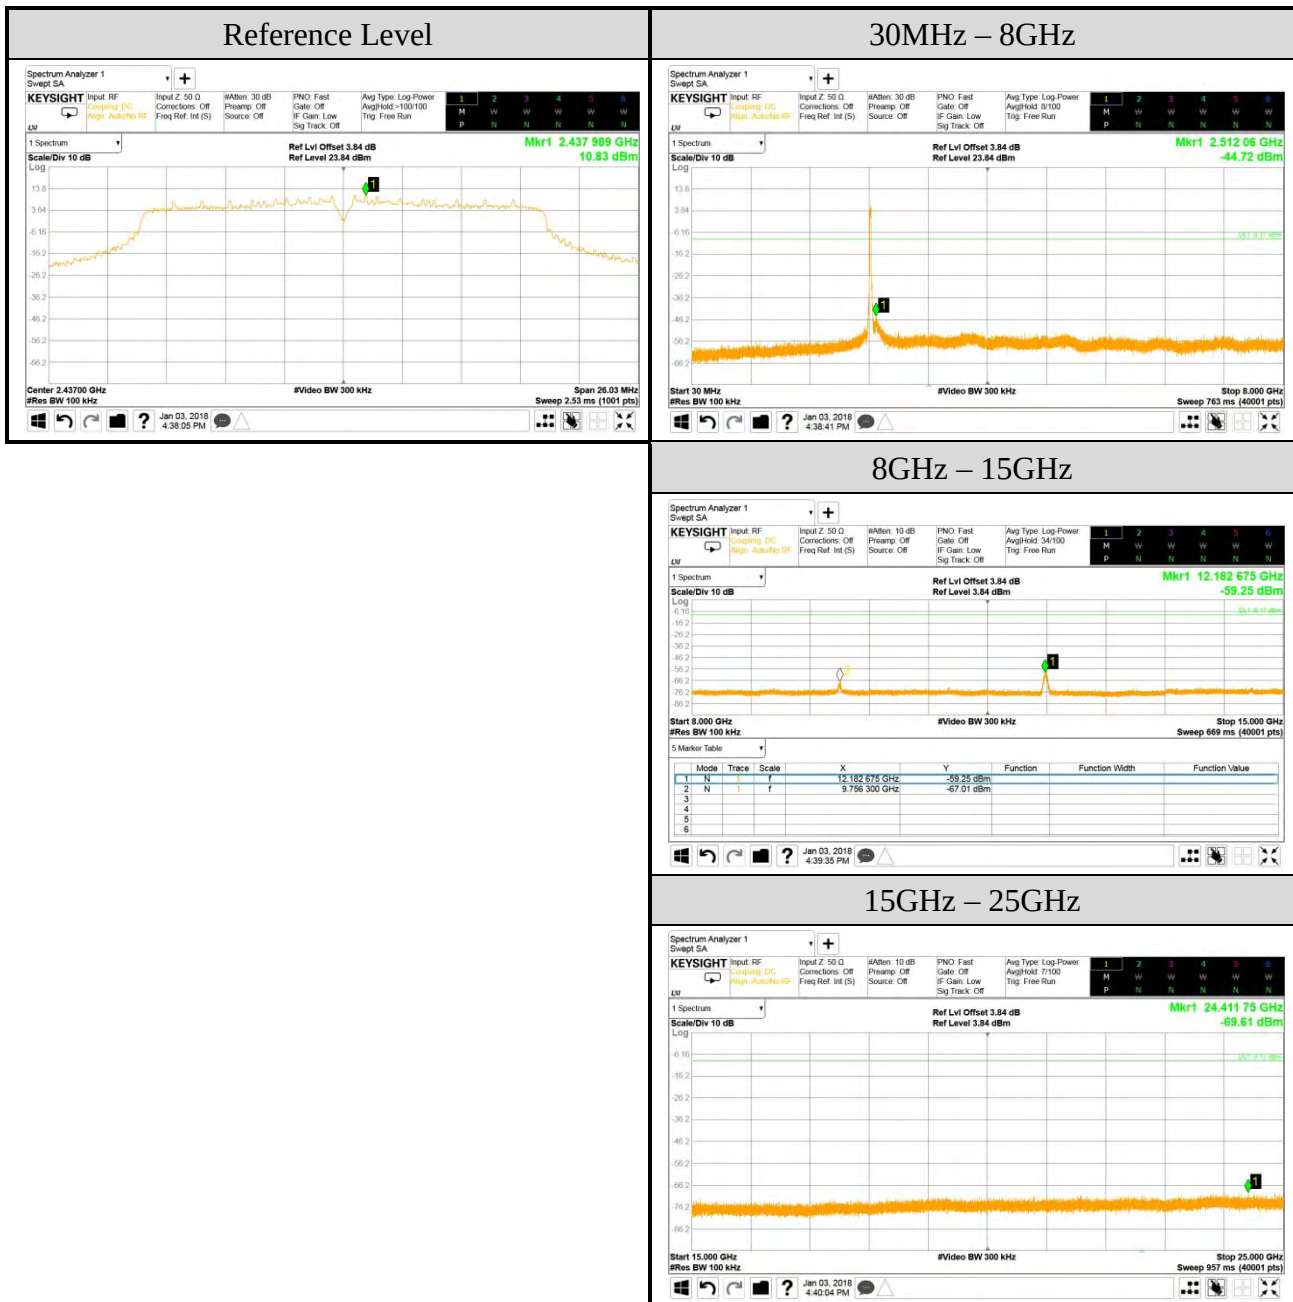


測試日期	2018/01/03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11n-HT20
		測試頻率	2462MHz

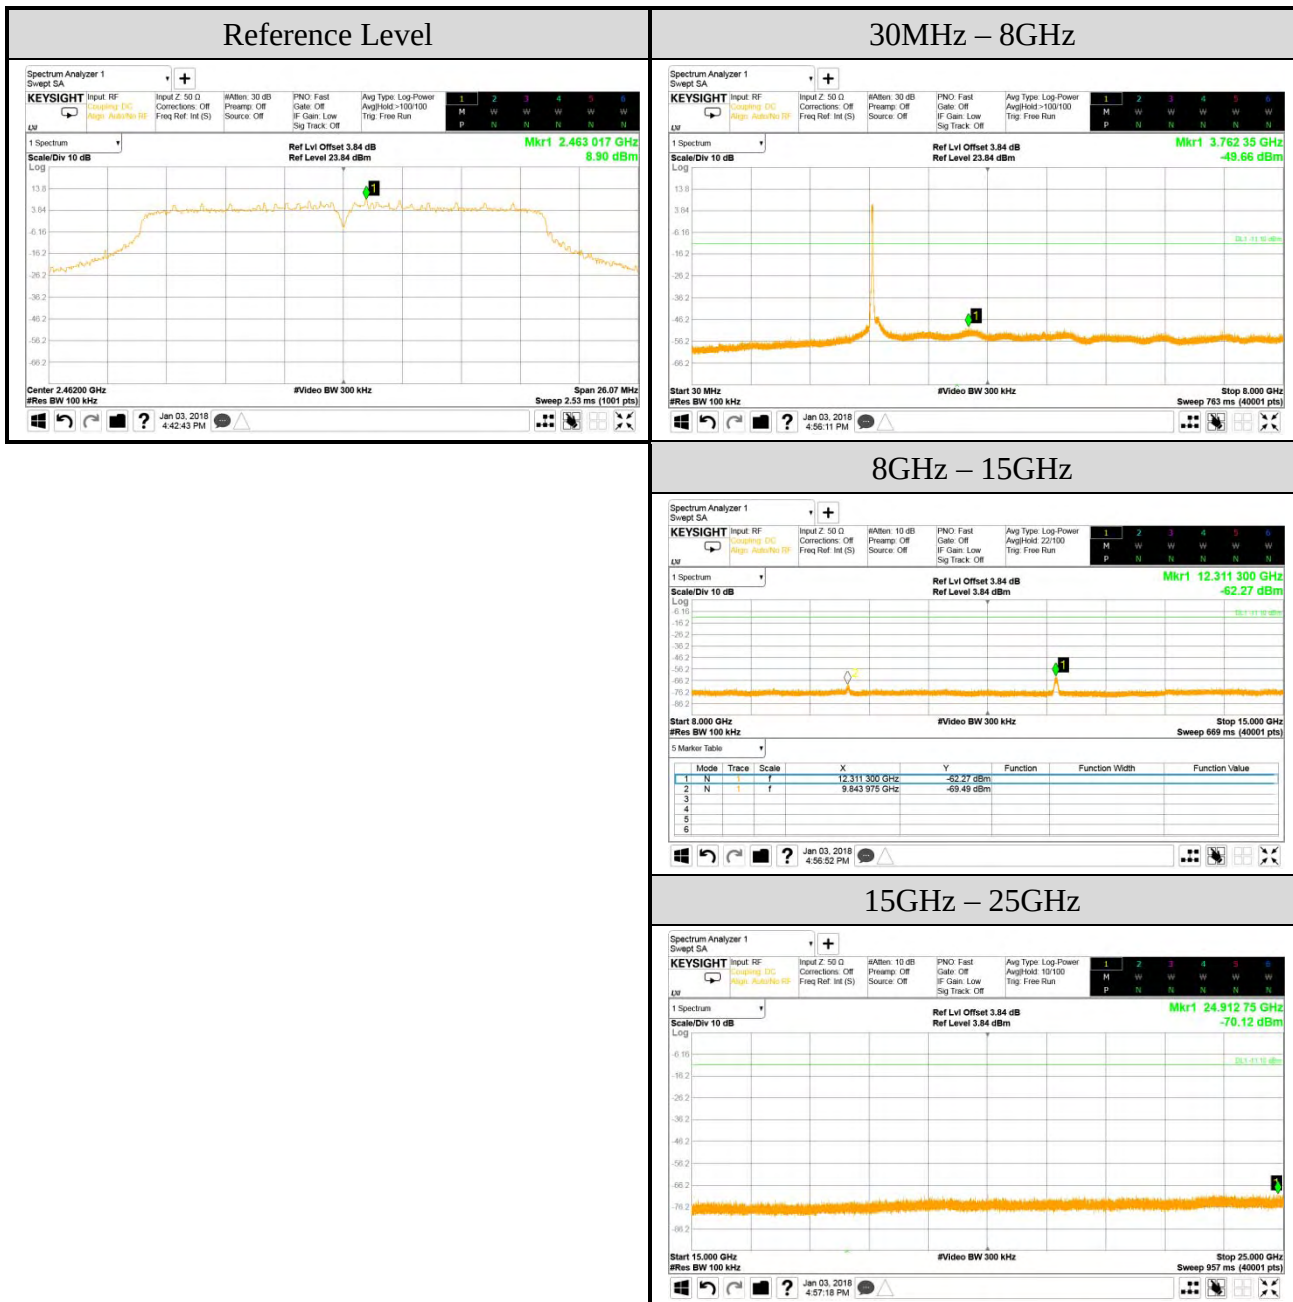


測試日期	2018/01/03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11n-HT40
		測試頻率	2422MHz

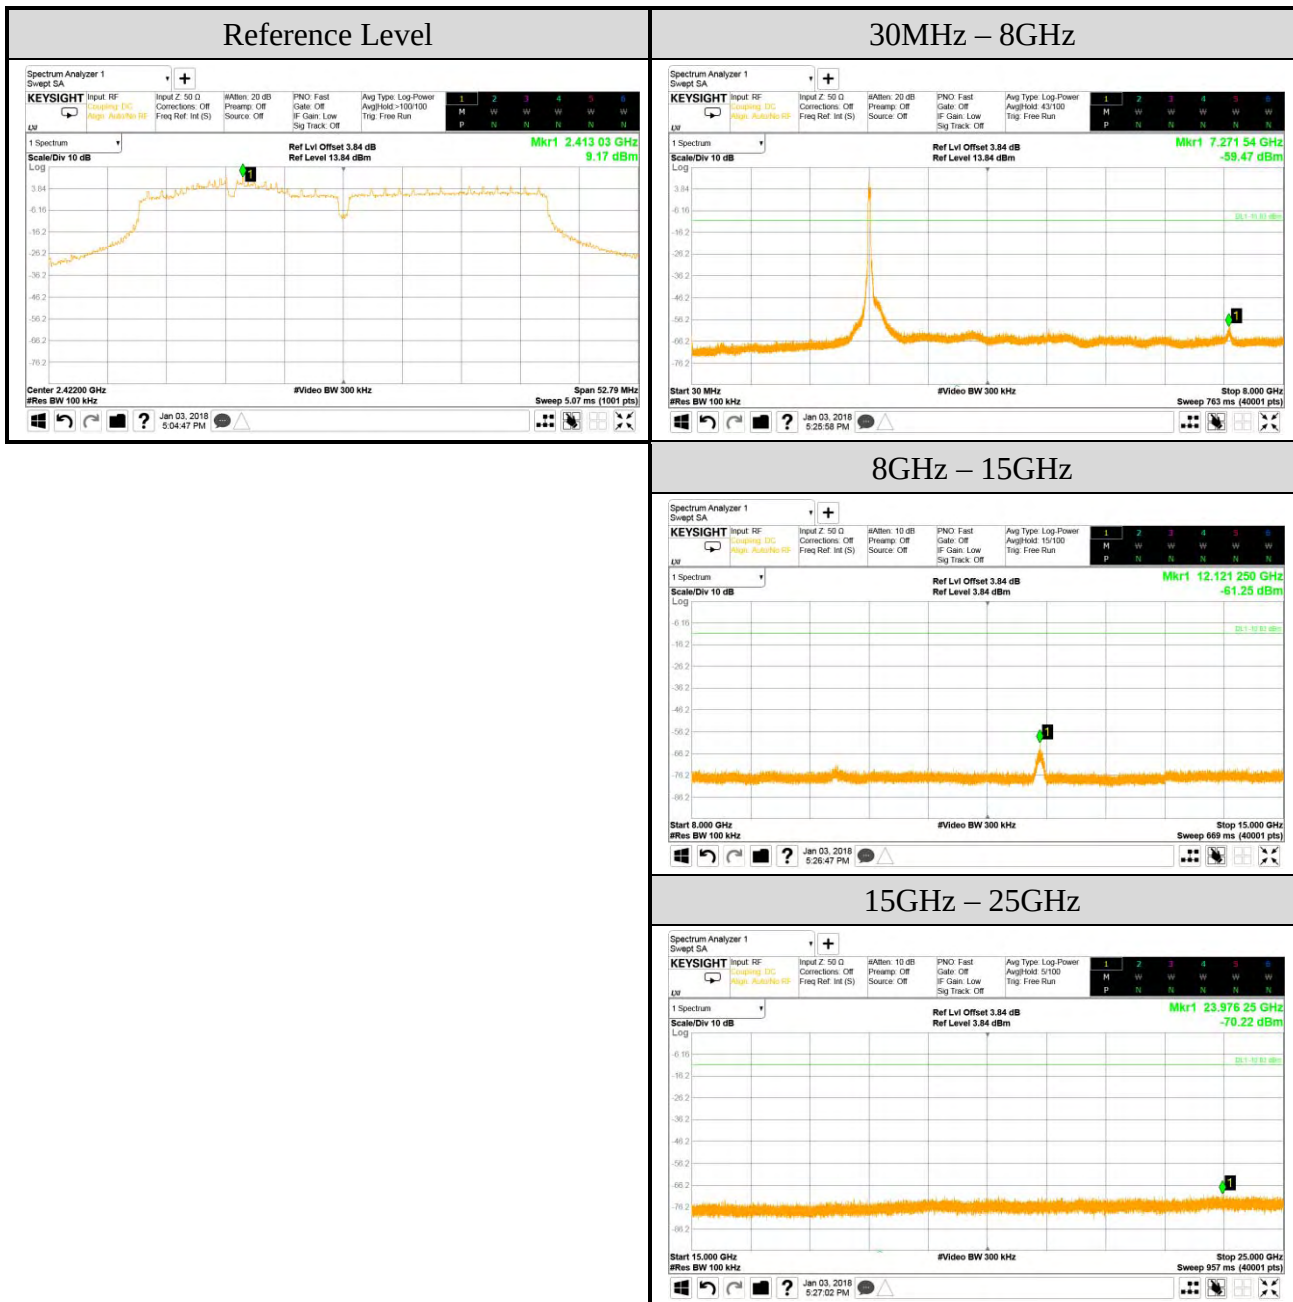

測試日期	2018/01/03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11n-HT40
		測試頻率	2437MHz

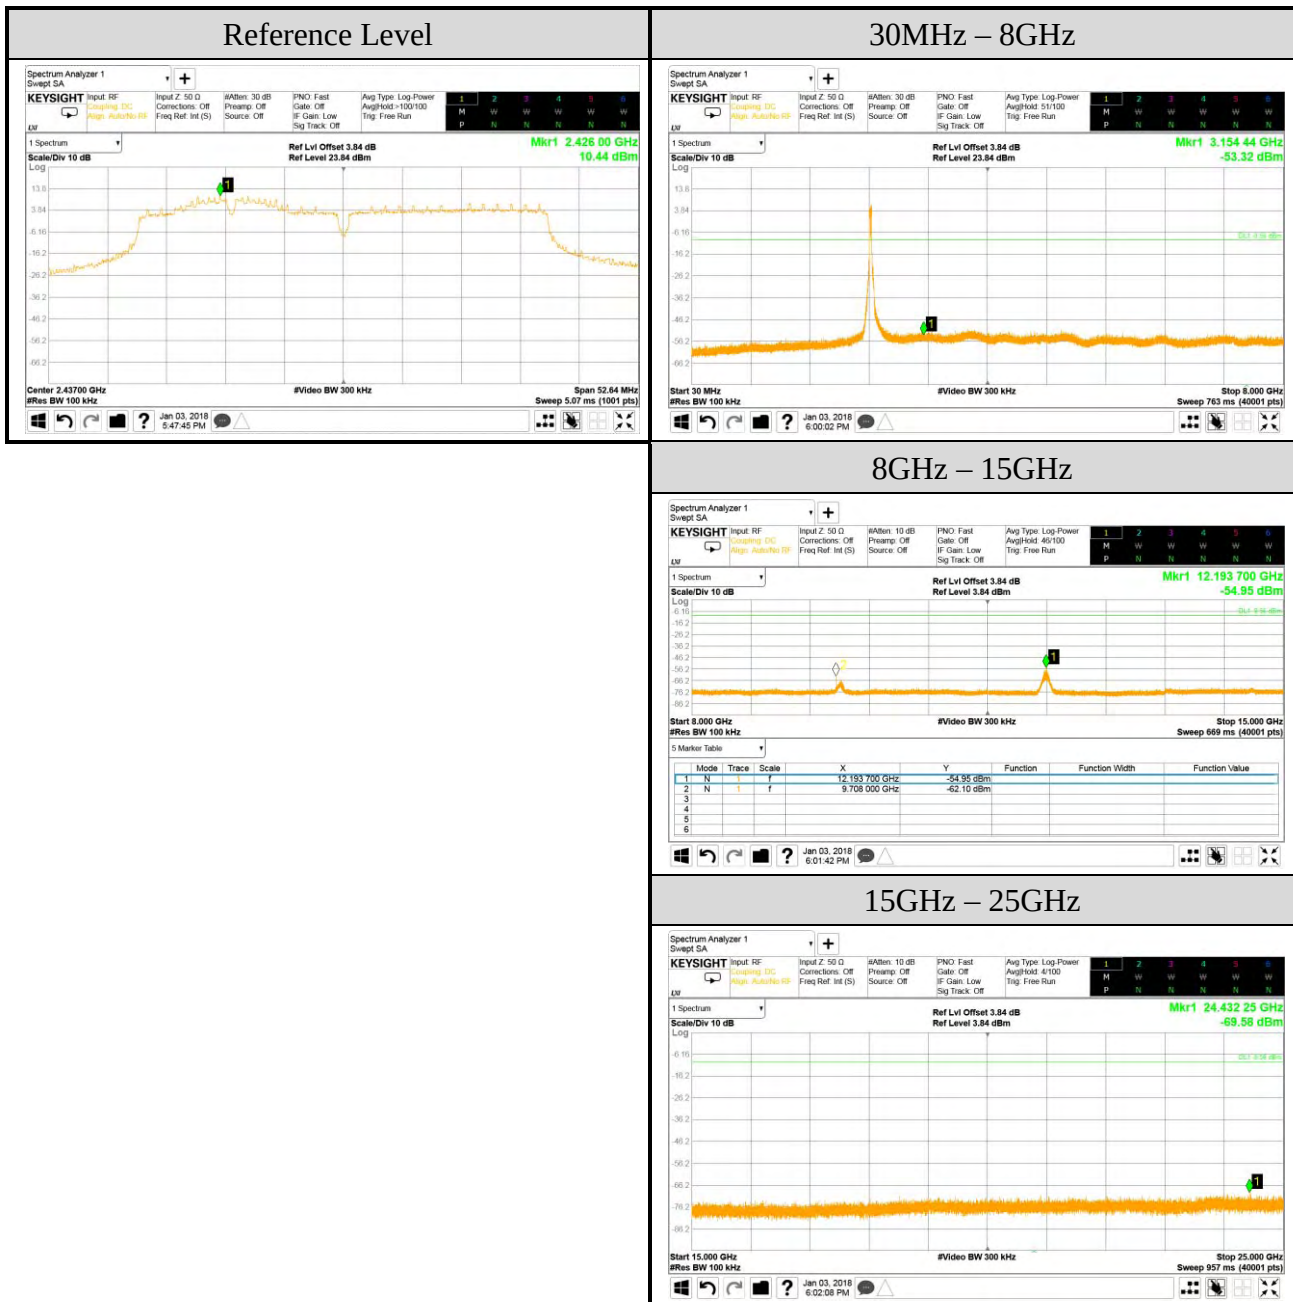

測試日期	2018/01/03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)	模式	802.11n-HT40
		測試頻率	2452MHz

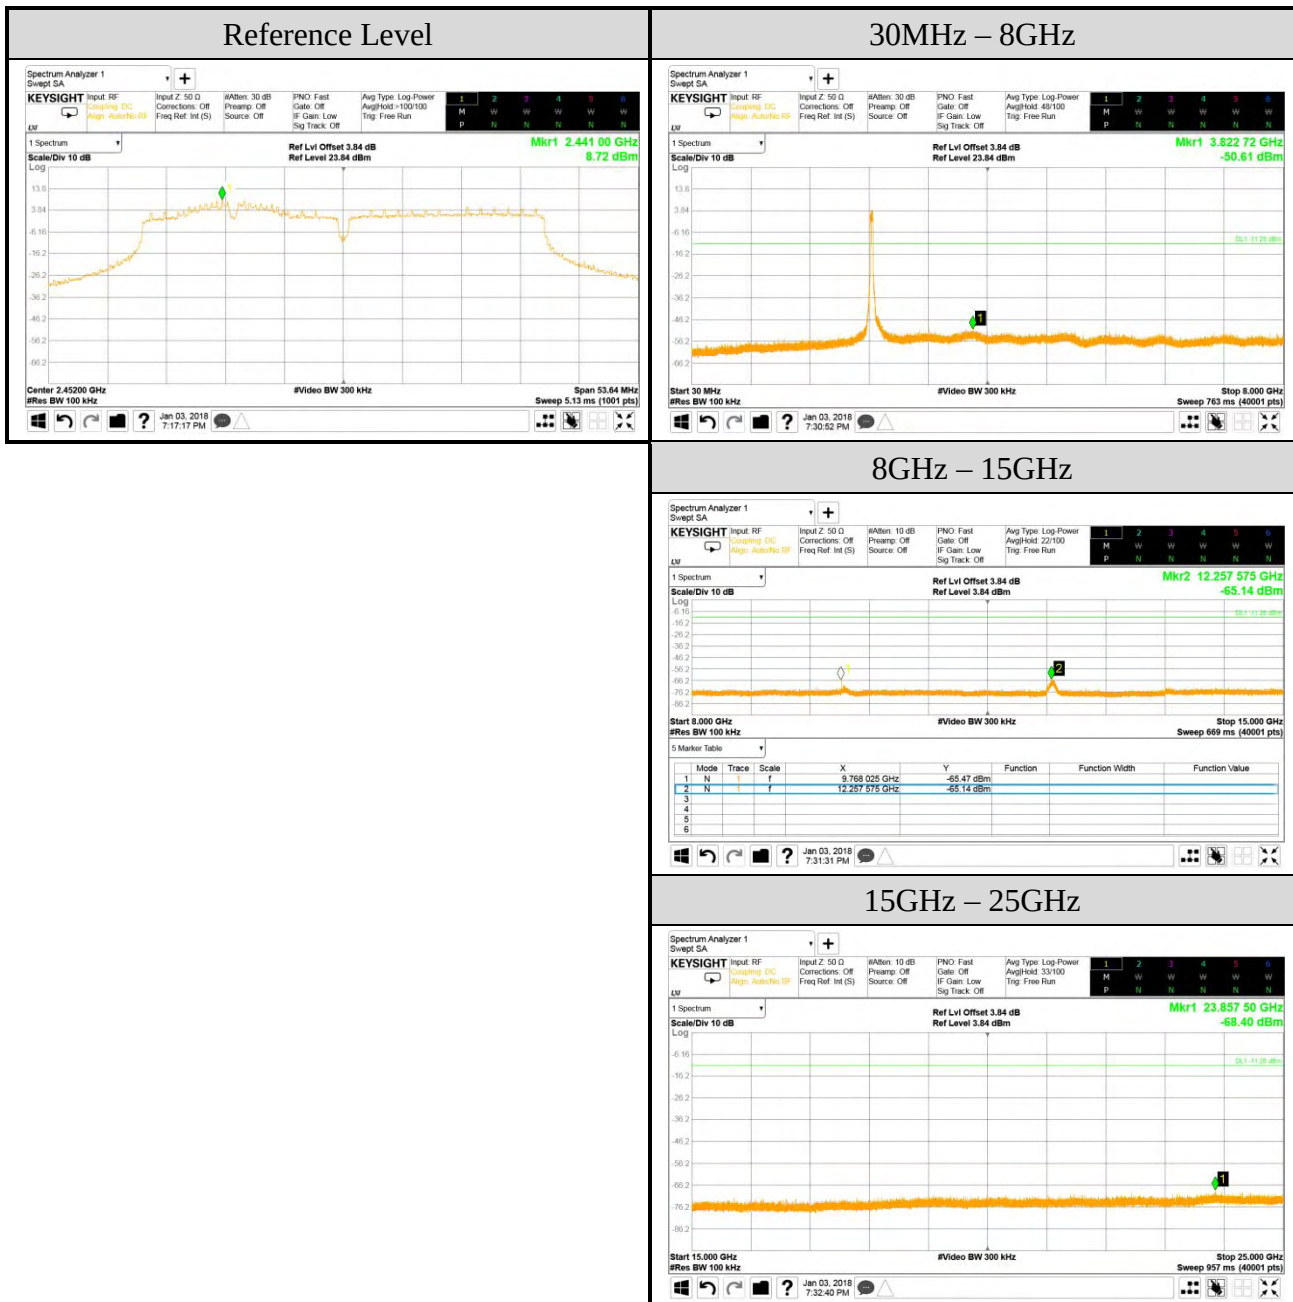


6. 功率密度之量測


測試日期	2018/01/02 ~ 03	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)		

6.1. 功率密度

模式	測試頻率 (MHz)	功率密度 (dBm)	限制值 (dBm)
802.11b	2412	7.45	8
	2437	7.70	
	2462	6.51	
802.11g	2412	2.72	
	2437	0.27	
	2462	-0.28	
802.11n-HT20	2412	-5.41	
	2437	-4.45	
	2462	-6.48	
802.11n-HT20	2422	-5.26	
	2437	-3.92	
	2452	-5.10	

6.2. 功率密度之量測圖

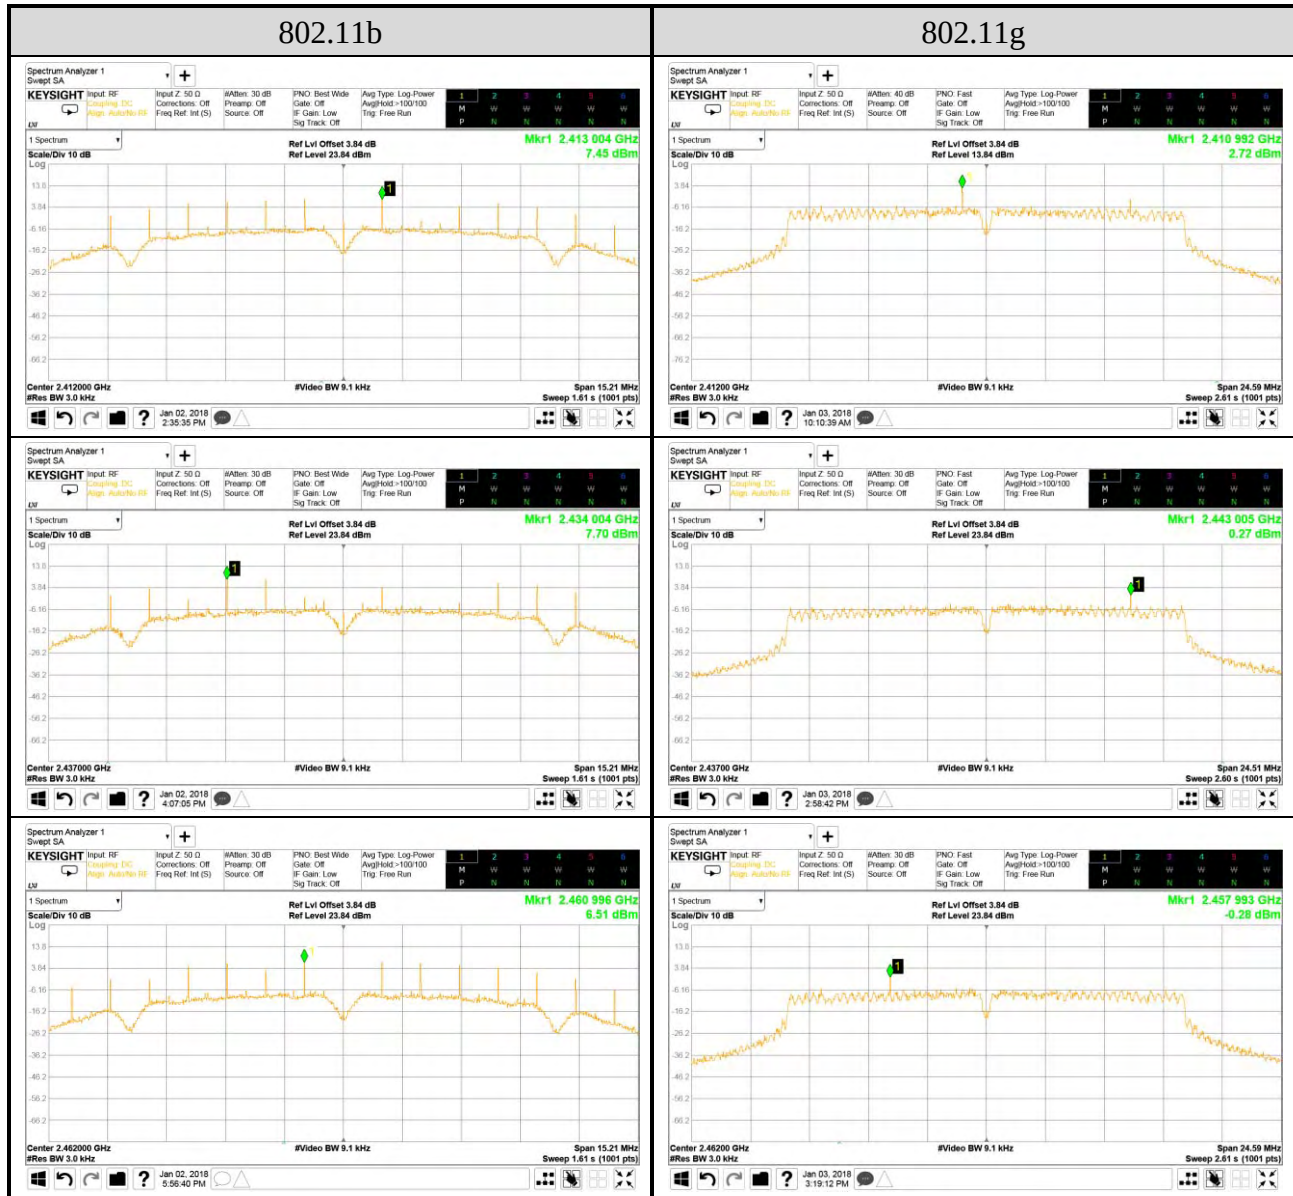

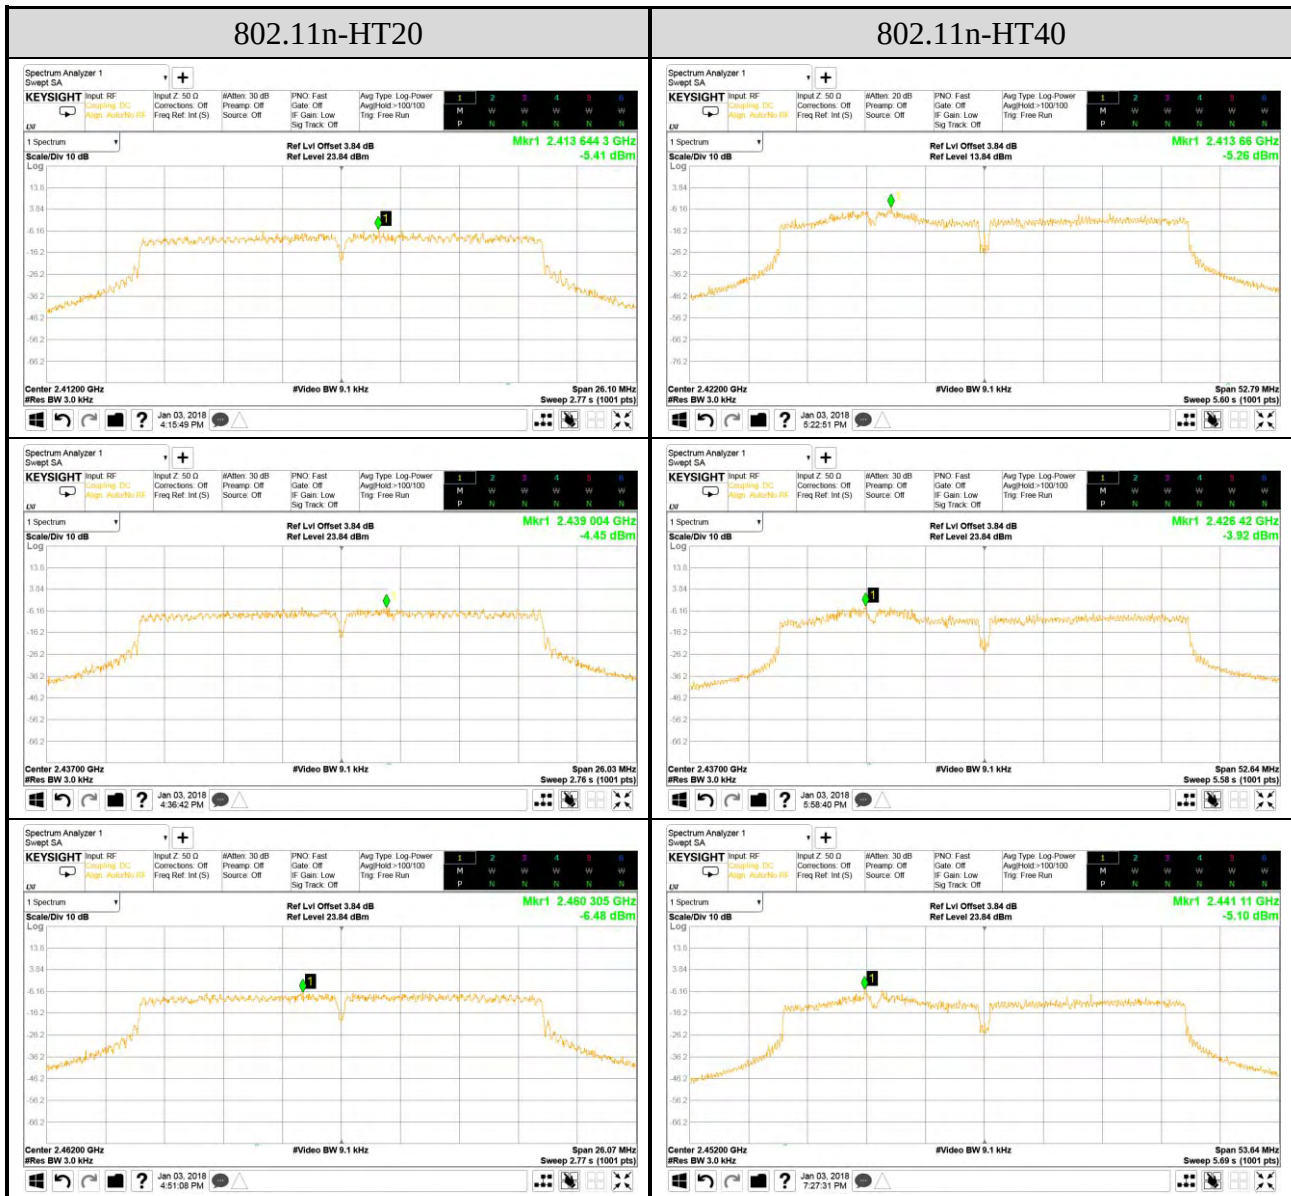

7. 電波暴露量之量測

測試日期	2018/02/09	環境溫/濕度	24°C/52%
測試電壓	DC 24V (透過 DC 電源供應器供電)		

距離人體(r):	20	cm	
最大發射功率(P):	26.68	dBm	= 465.586 mW
最大天線增益(G):	3	dB	= 1.995 Numerical
MPE (S) = (P*G) / (4* π *r ²) = 0.1848 mW/cm ²			
註：1. 最大發射功率系指2.4GHz各模式/頻道中最大之發射功率功率。			
2. 電磁波曝露量MPE標準值1mW/cm ² ，送測產品實測值為：0.1848 mW/cm ²			