


802.11n-HT40 Power Spectral Density - Ant 2 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 134 (5670MHz)




Channel 142 (5710MHz)

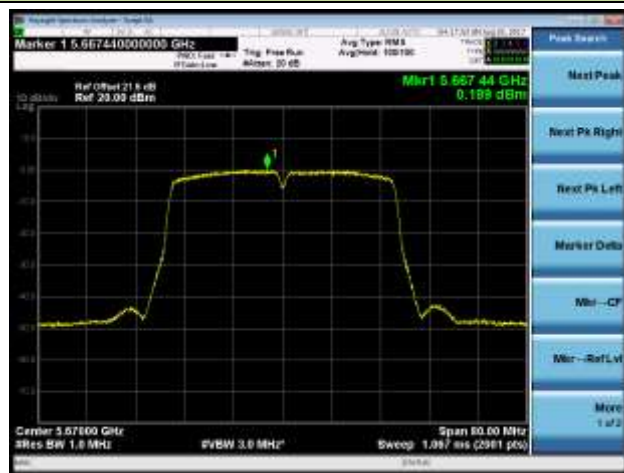

Channel 151 (5755MHz)




Channel 159 (5795MHz)

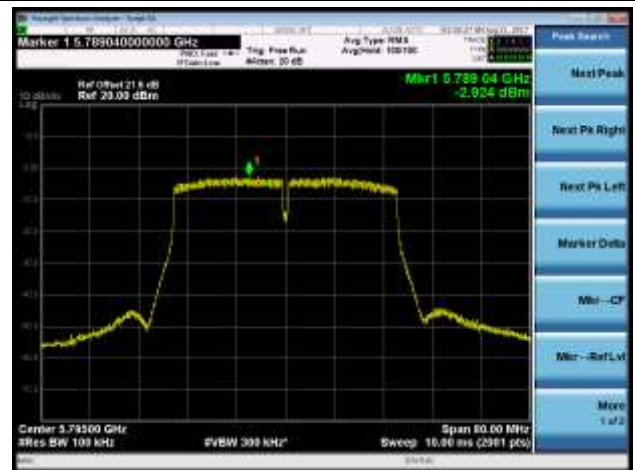

802.11ac-VHT20 Power Spectral Density - Ant 2 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)


Channel 36 (5180MHz)

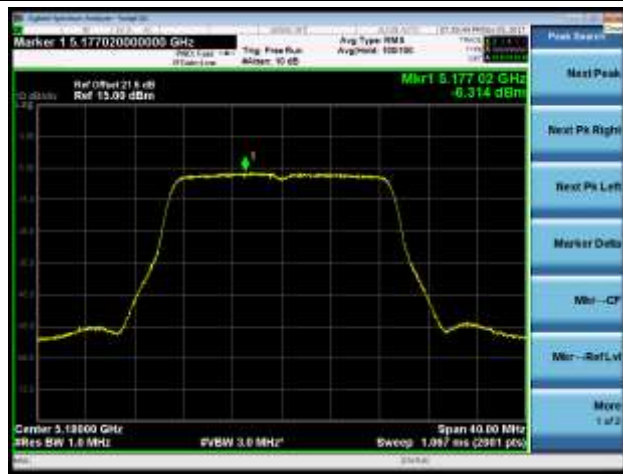


Channel 44 (5220MHz)




Channel 48 (5240MHz)

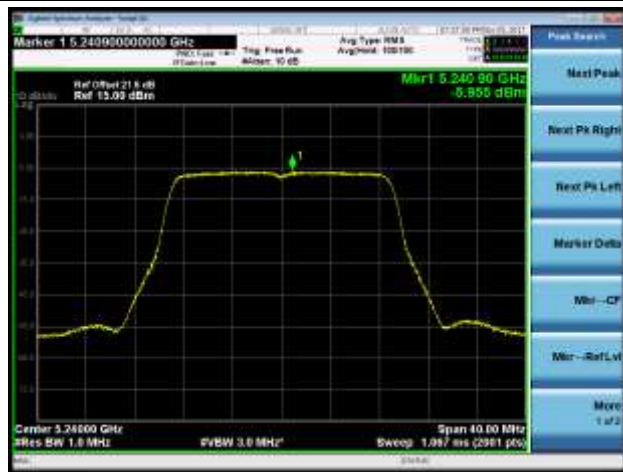


Channel 52 (5260MHz)

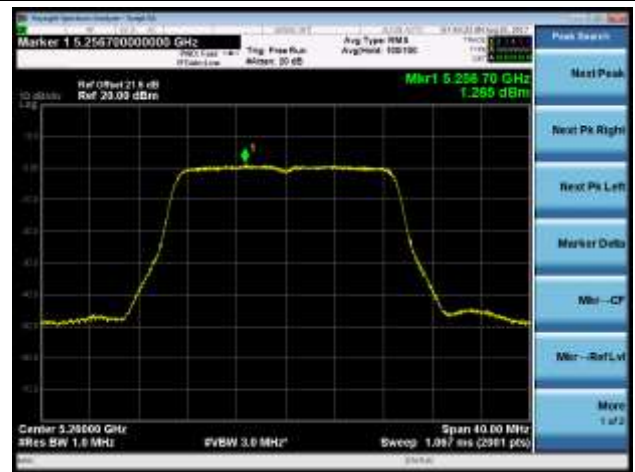

Channel 60 (5300MHz)

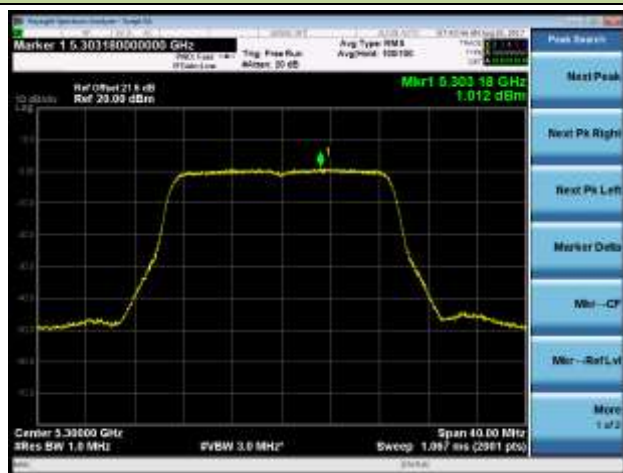


Channel 64 (5320MHz)

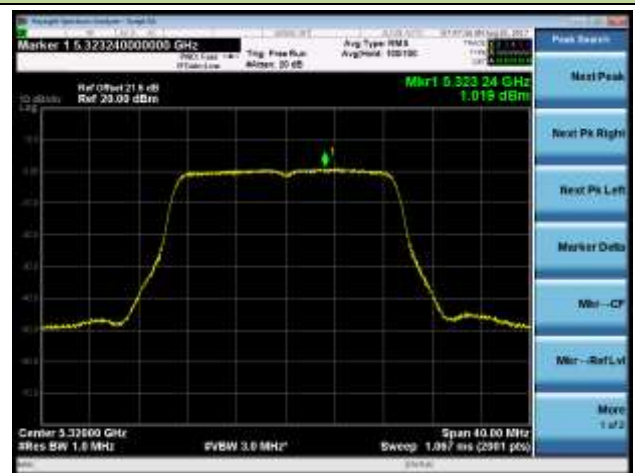

802.11ac-VHT20 Power Spectral Density - Ant 2 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)


Channel 100 (5500MHz)

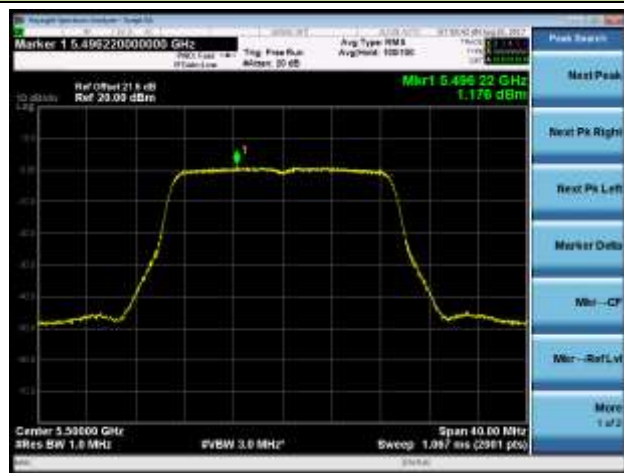


Channel 120 (5600MHz)




Channel 140 (5700MHz)

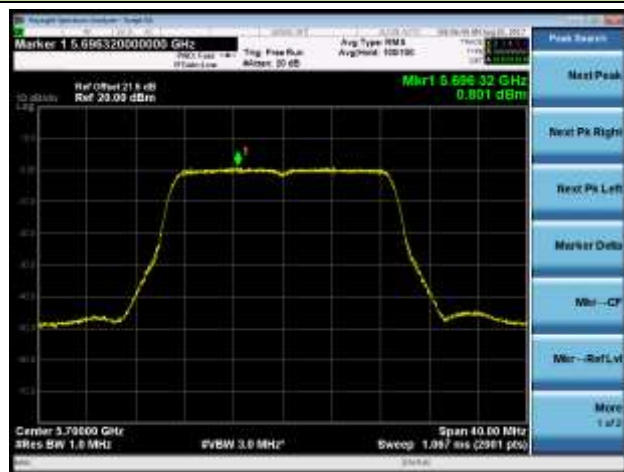


Channel 144 (5720MHz)

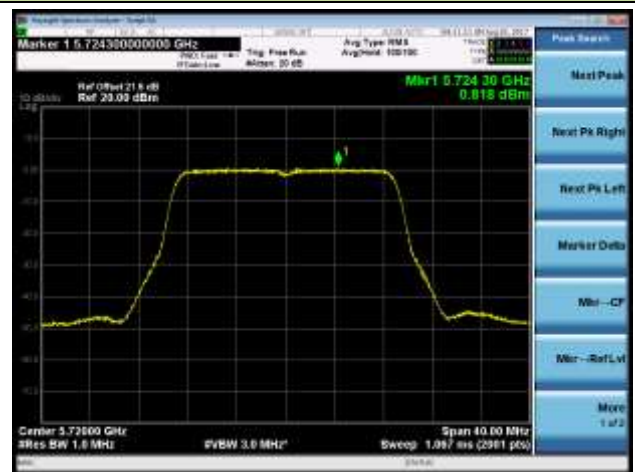

Channel 149 (5745MHz)

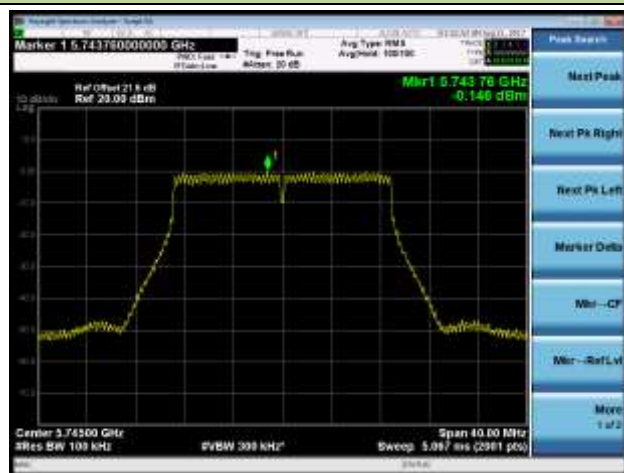


Channel 157 (5785MHz)

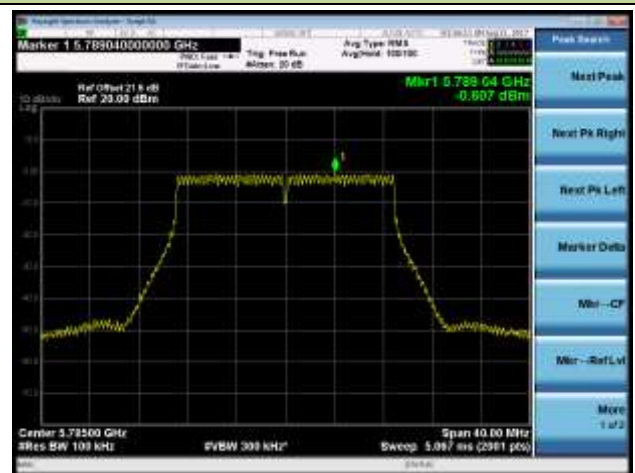


802.11ac-VHT20 Power Spectral Density - Ant 2 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 165 (5825MHz)

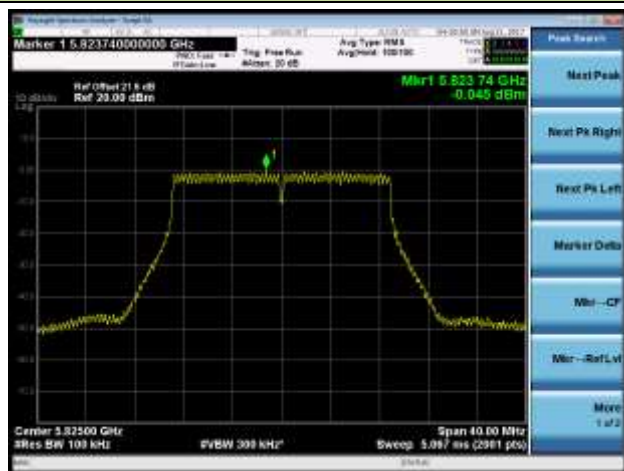

802.11ac-VHT40 Power Spectral Density - Ant 2 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)


Channel 38 (5190MHz)

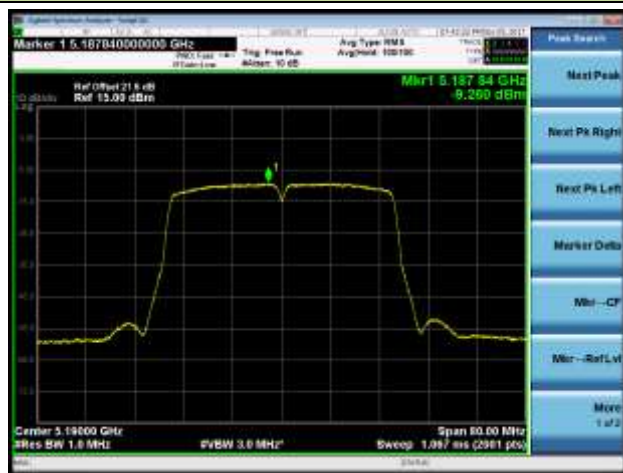

Channel 46 (5230MHz)




Channel 54 (5270MHz)

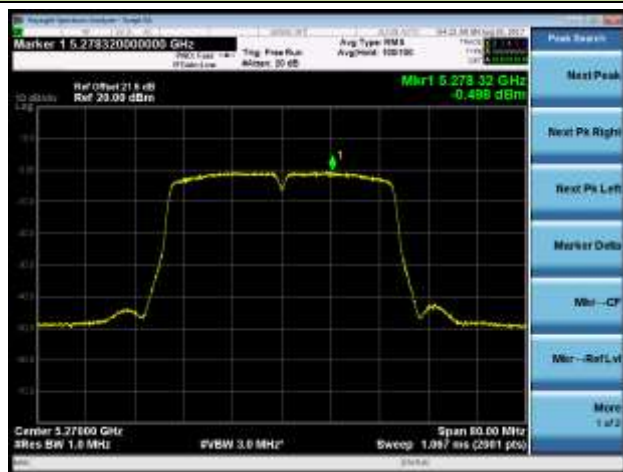

Channel 62 (5310MHz)



Channel 102 (5510MHz)

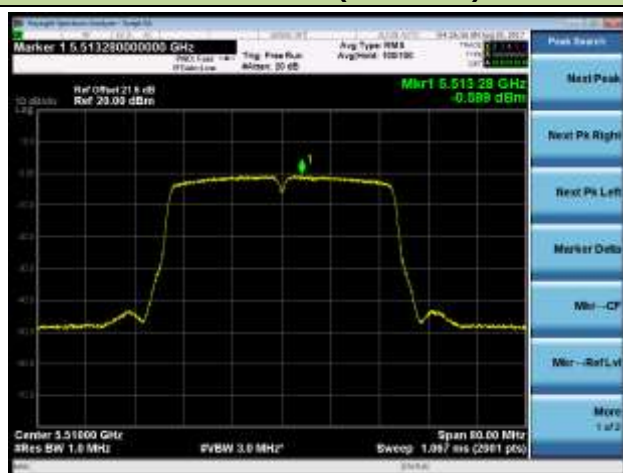

Channel 118 (5590MHz)



802.11ac-VHT40 Power Spectral Density - Ant 2 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 134 (5670MHz)




Channel 142 (5710MHz)



Channel 151 (5755MHz)




Channel 159 (5795MHz)

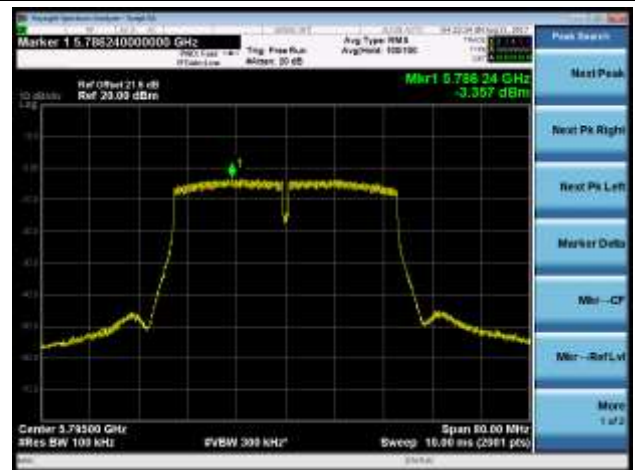


802.11ac-VHT80 Power Spectral Density - Ant 2 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)


Channel 42 (5210MHz)

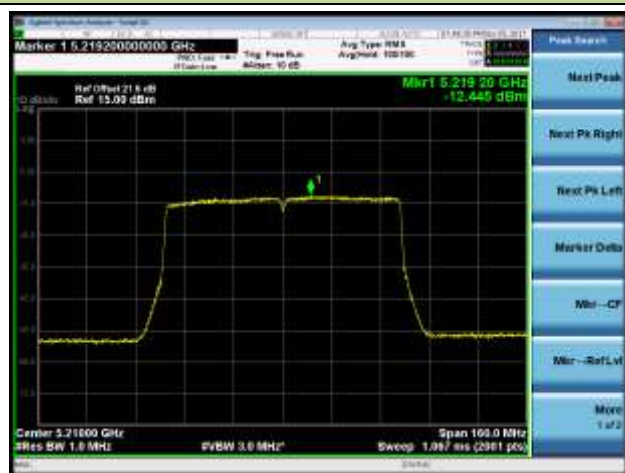


Channel 58 (5290MHz)

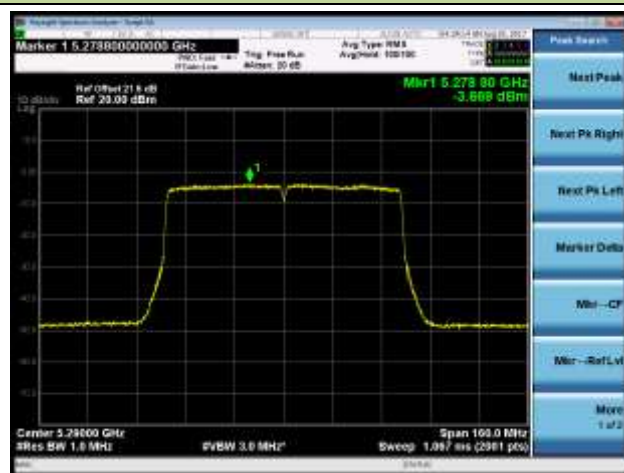

Channel 106 (5530MHz)

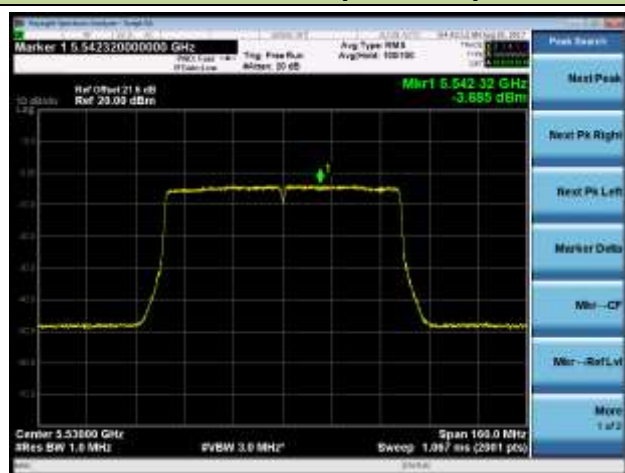


Channel 122 (5610MHz)

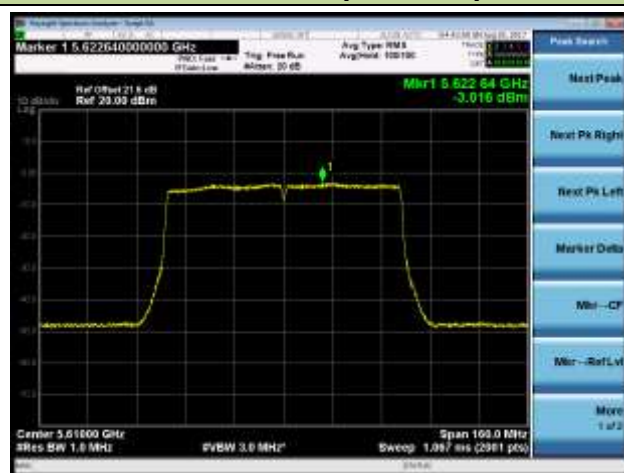

Channel 138 (5690MHz)




Channel 155 (5775MHz)

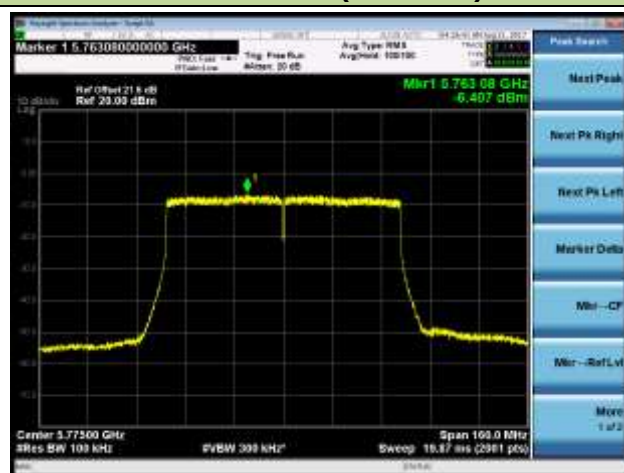


802.11ac-VHT80+80 Power Spectral Density - Ant 2 / Ant 2 + 3 (Ant 0 + 1 + 2 + 3) (Beam-Forming Mode)

Channel 42 (5210MHz)

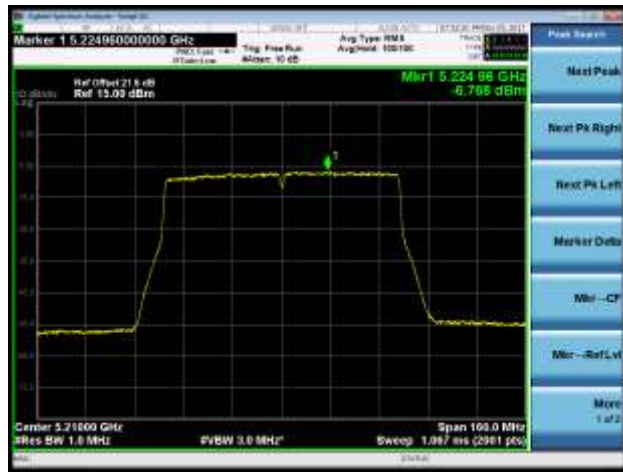


Channel 58 (5290MHz)

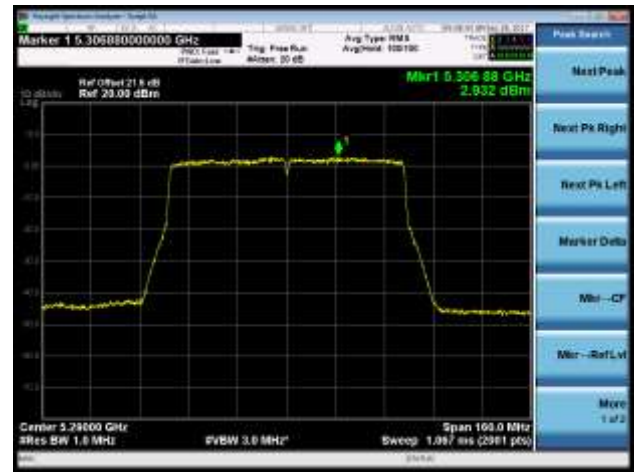


Channel 106 (5530MHz)




Channel 122 (5610MHz)

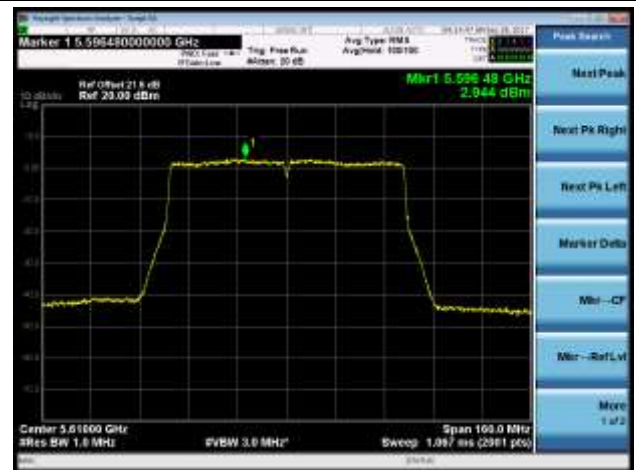

Channel 138 (5690MHz)

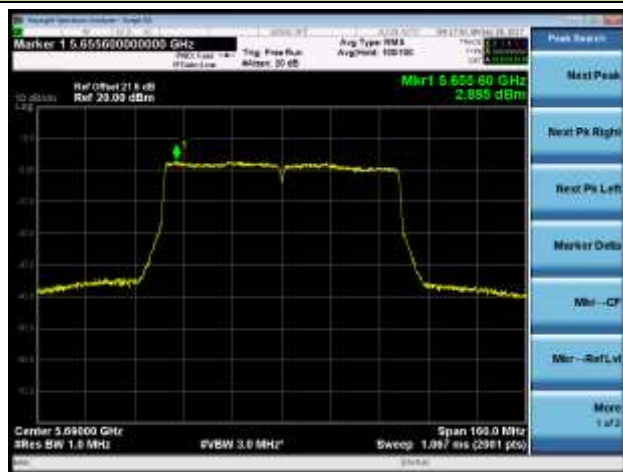

Channel 155 (5775MHz)

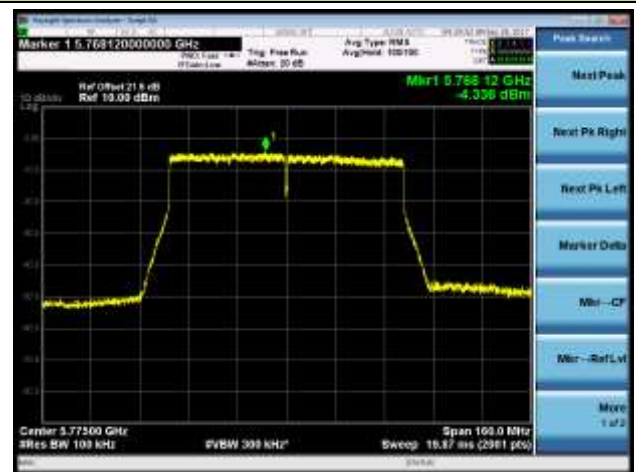


802.11n-HT20 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 36 (5180MHz)




Channel 44 (5220MHz)

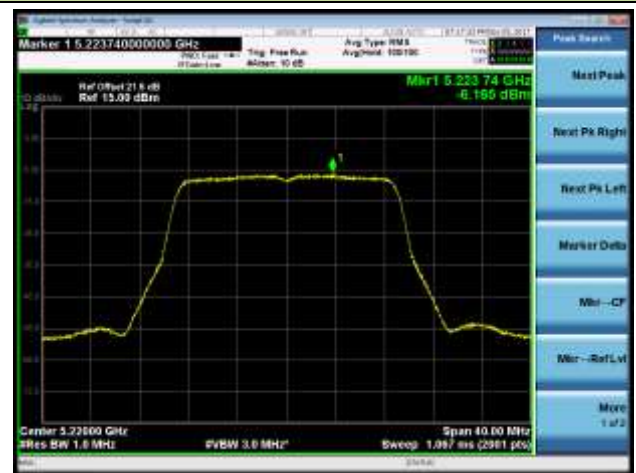


Channel 48 (5240MHz)




Channel 52 (5260MHz)

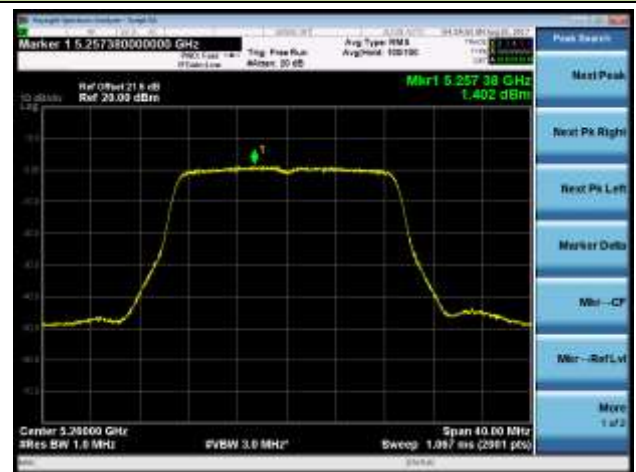

Channel 60 (5300MHz)

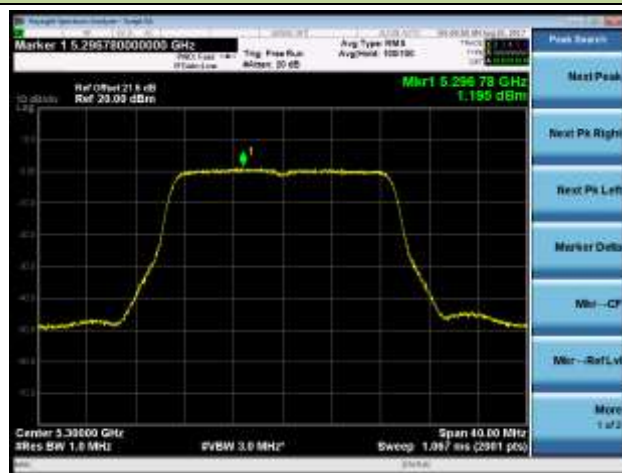


Channel 64 (5320MHz)

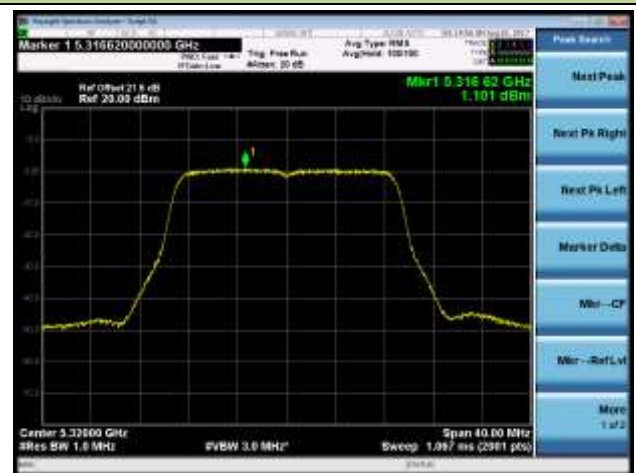

802.11n-HT20 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)


Channel 100 (5500MHz)

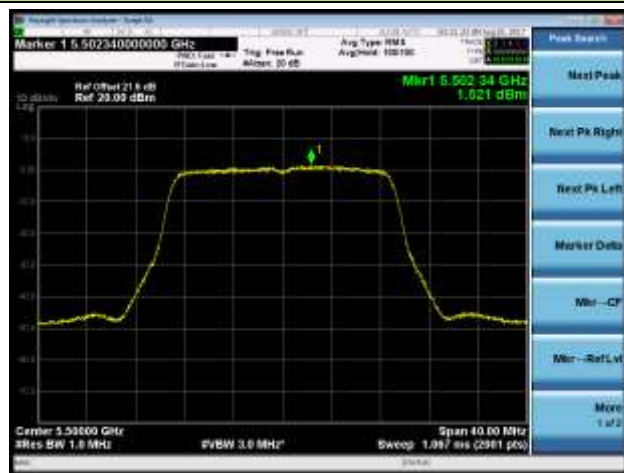


Channel 120 (5600MHz)




Channel 140 (5700MHz)

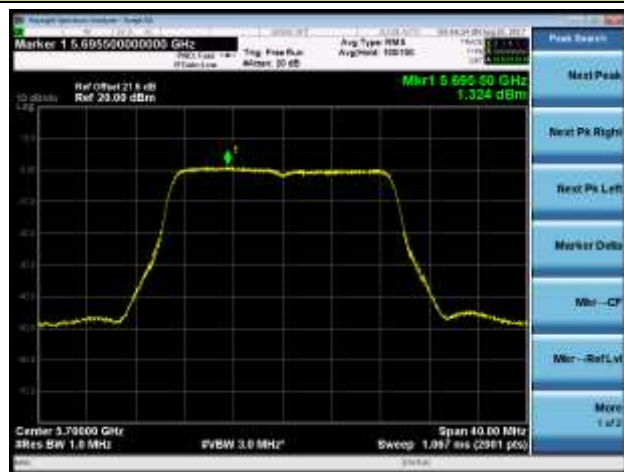


Channel 144 (5720MHz)

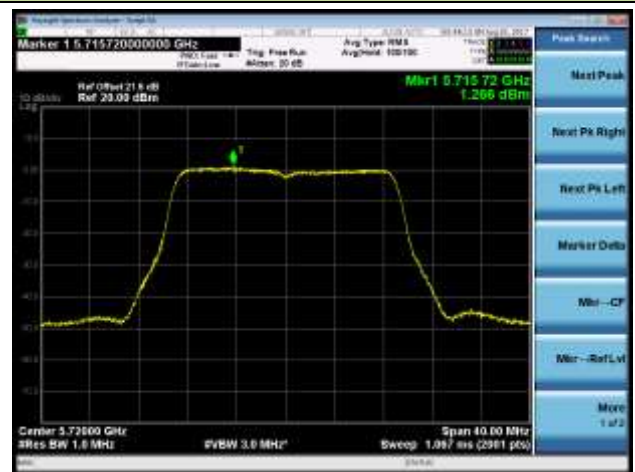

Channel 149 (5745MHz)

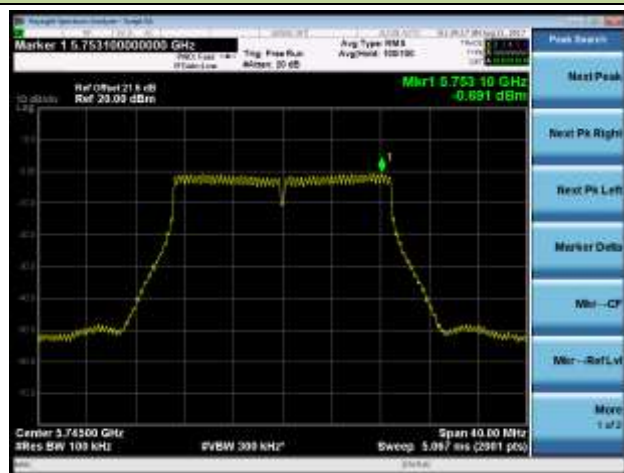


Channel 157 (5785MHz)

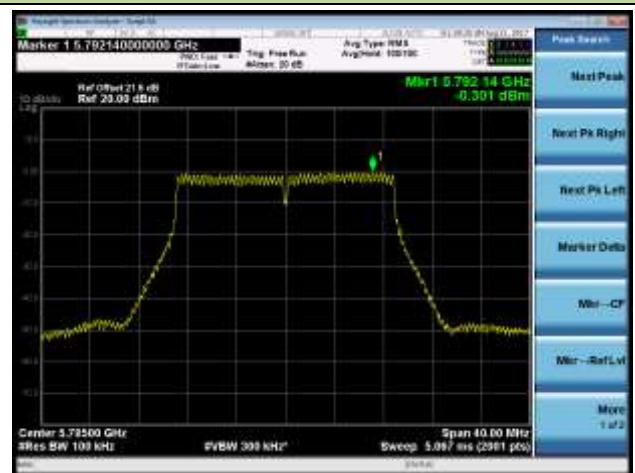


802.11n-HT20 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 165 (5825MHz)

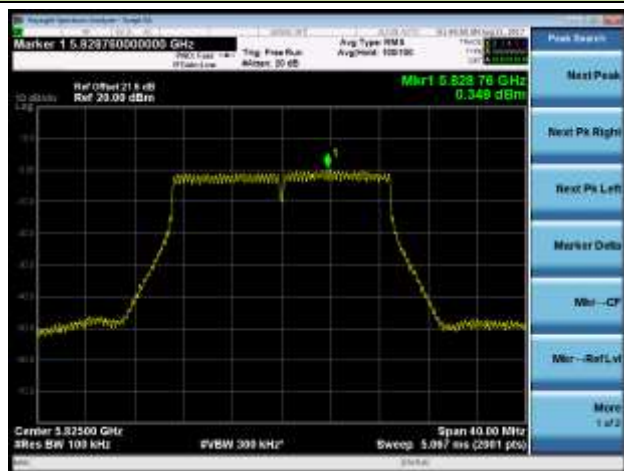


802.11n-HT40 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)


Channel 38 (5190MHz)

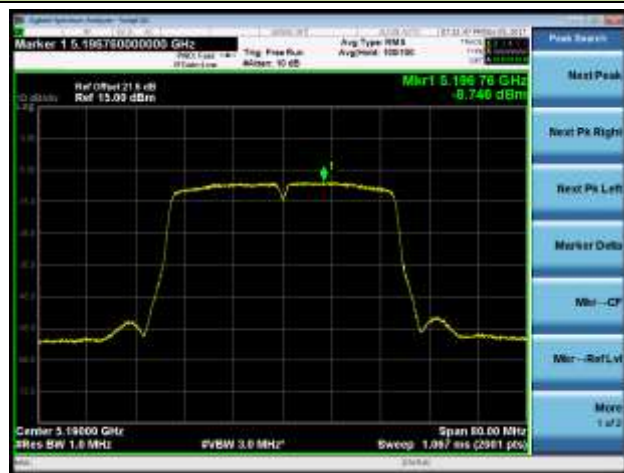


Channel 46 (5230MHz)

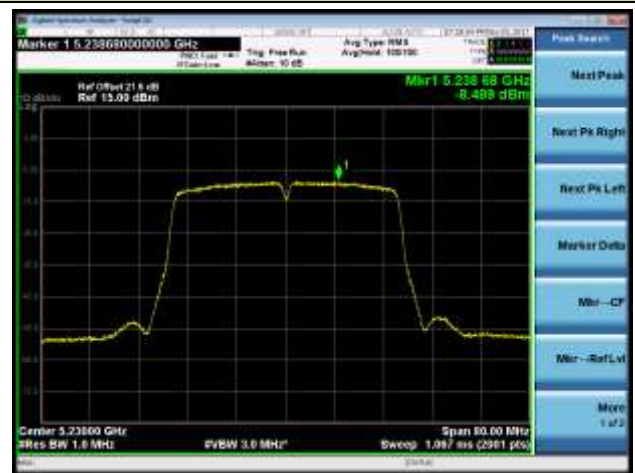

Channel 54 (5270MHz)

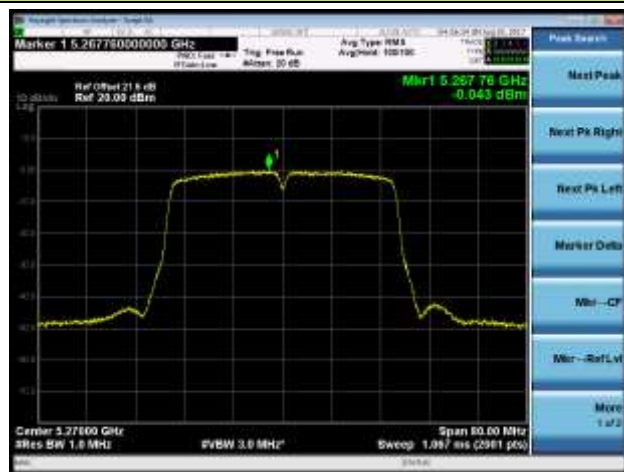


Channel 62 (5310MHz)

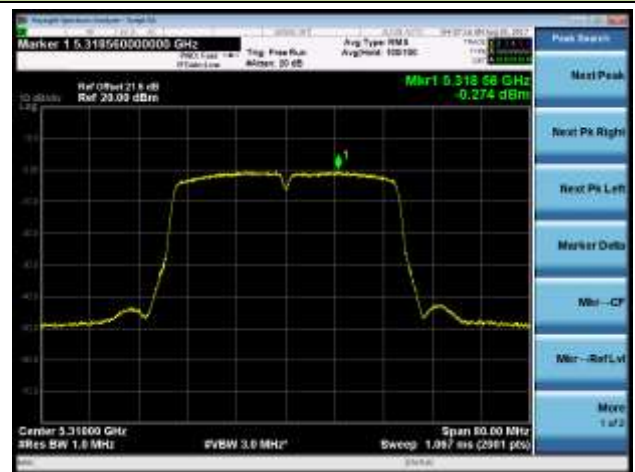

Channel 102 (5510MHz)



Channel 118 (5590MHz)

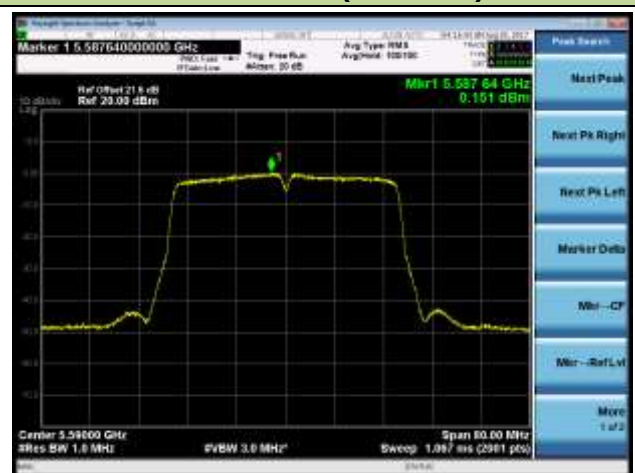

802.11n-HT40 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 134 (5670MHz)




Channel 142 (5710MHz)



Channel 151 (5755MHz)




Channel 159 (5795MHz)

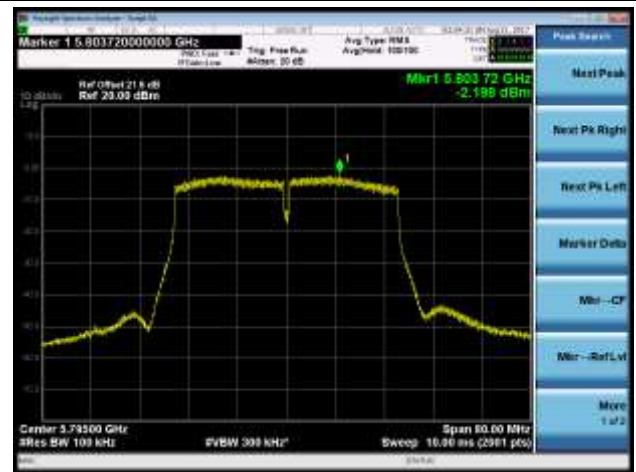


802.11ac-VHT20 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)


Channel 36 (5180MHz)

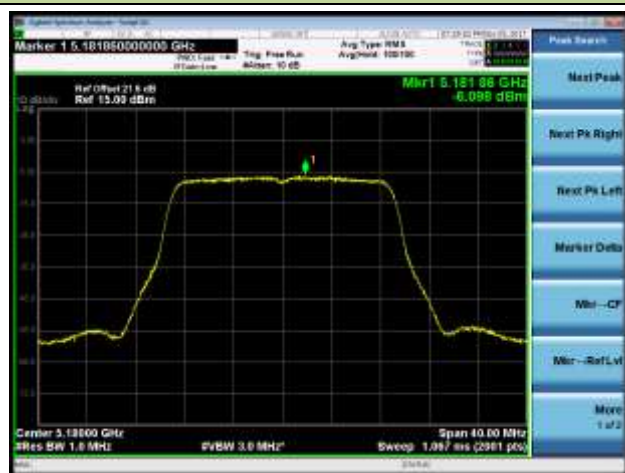


Channel 44 (5220MHz)

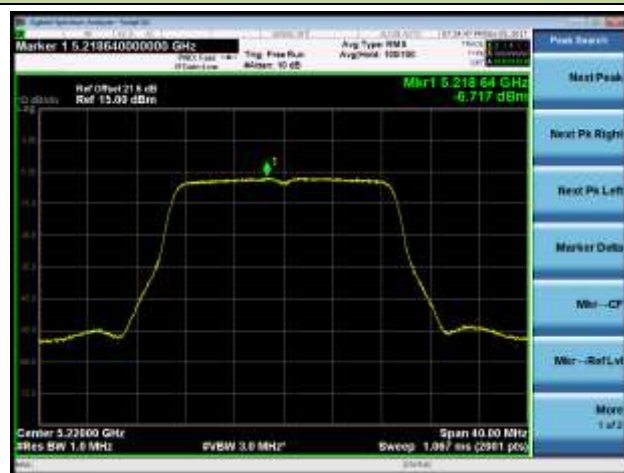


Channel 48 (5240MHz)

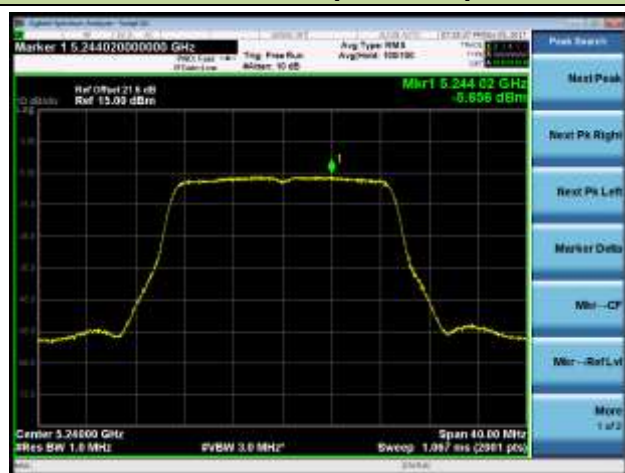


Channel 52 (5260MHz)

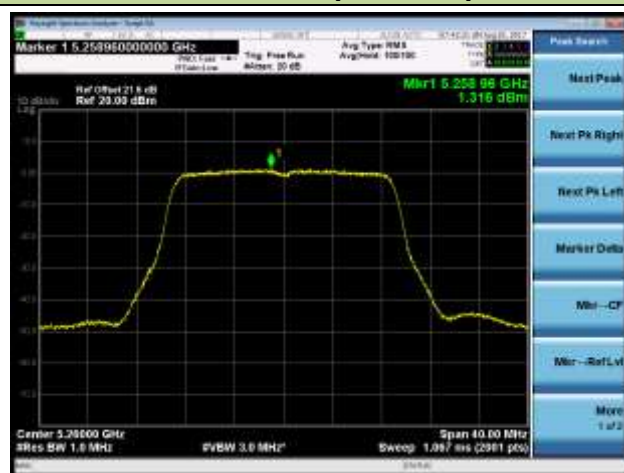

Channel 60 (5300MHz)

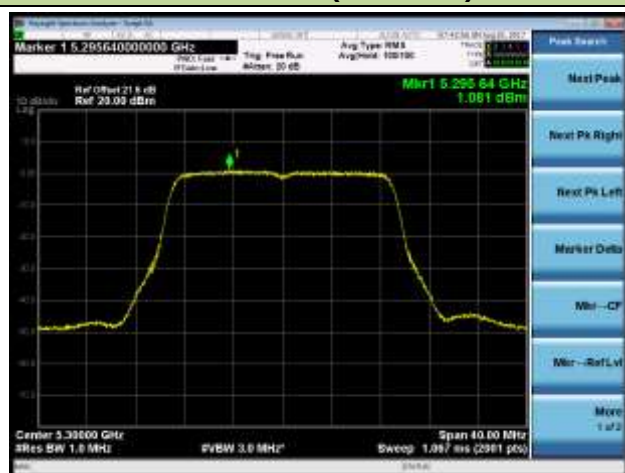


Channel 64 (5320MHz)

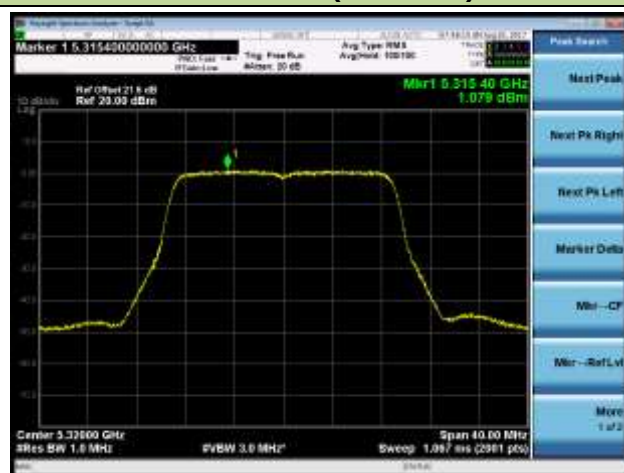


802.11ac-VHT20 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)


Channel 100 (5500MHz)

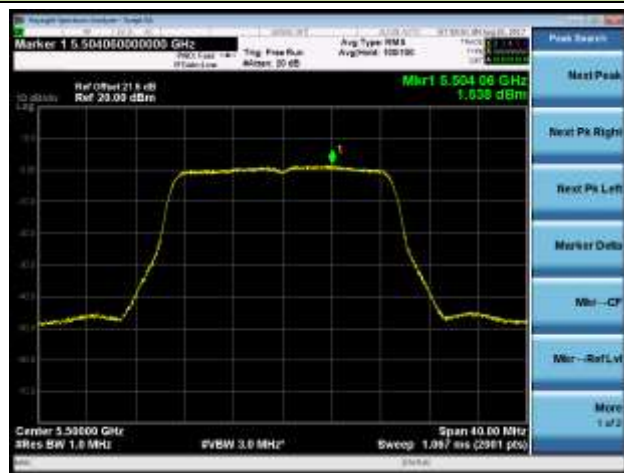


Channel 120 (5600MHz)

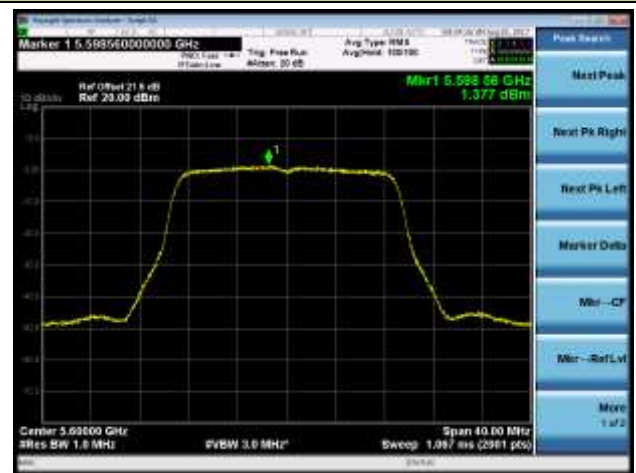


Channel 140 (5700MHz)

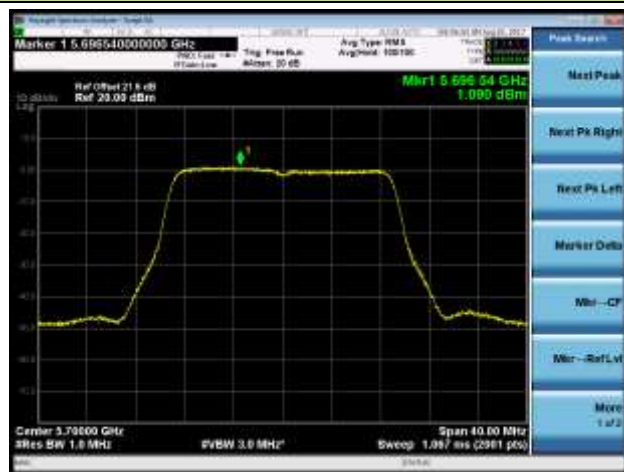


Channel 144 (5720MHz)

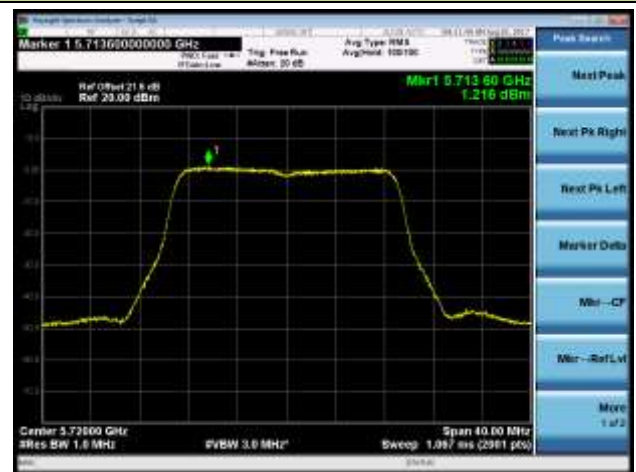

Channel 149 (5745MHz)

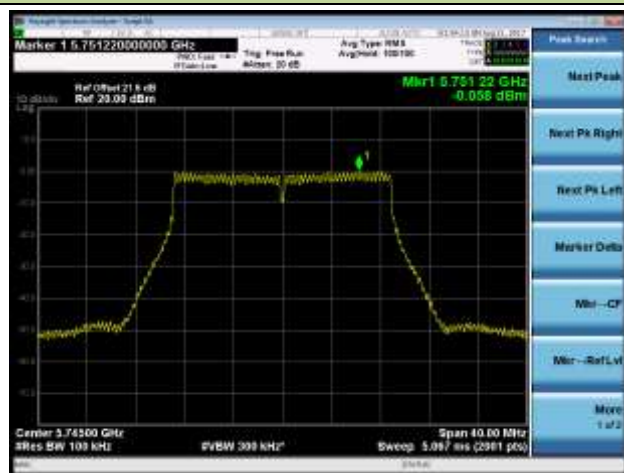


Channel 157 (5785MHz)

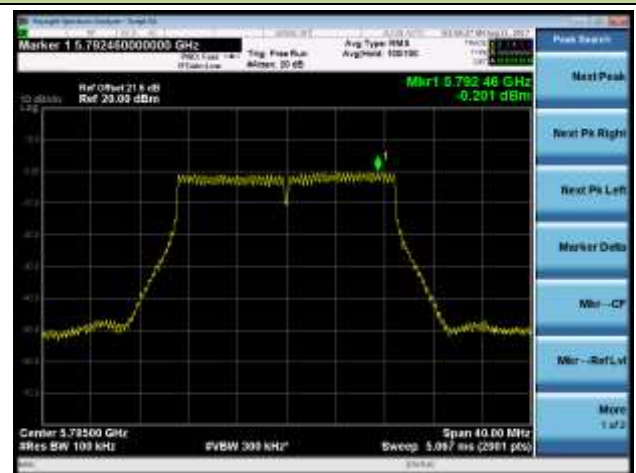

802.11ac-VHT20 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 165 (5825MHz)

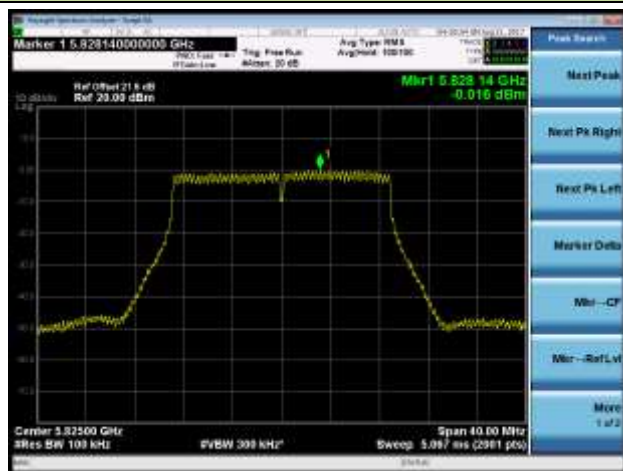

802.11ac-VHT40 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 38 (5190MHz)



Channel 46 (5230MHz)



Channel 54 (5270MHz)




Channel 62 (5310MHz)



Channel 102 (5510MHz)



Channel 118 (5590MHz)

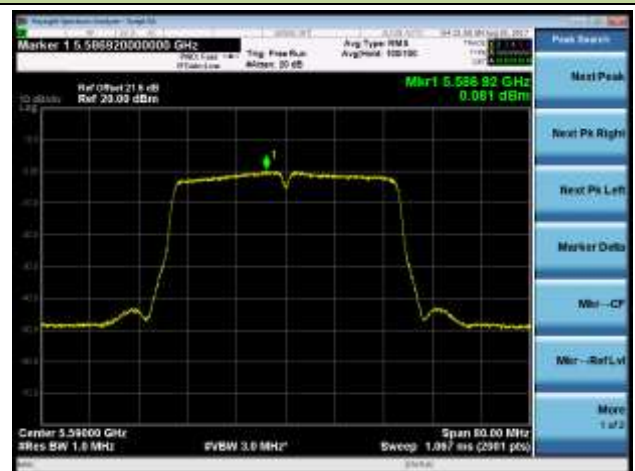

802.11ac-VHT40 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 134 (5670MHz)



Channel 142 (5710MHz)



Channel 151 (5755MHz)




Channel 159 (5795MHz)



802.11ac-VHT80 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 42 (5210MHz)

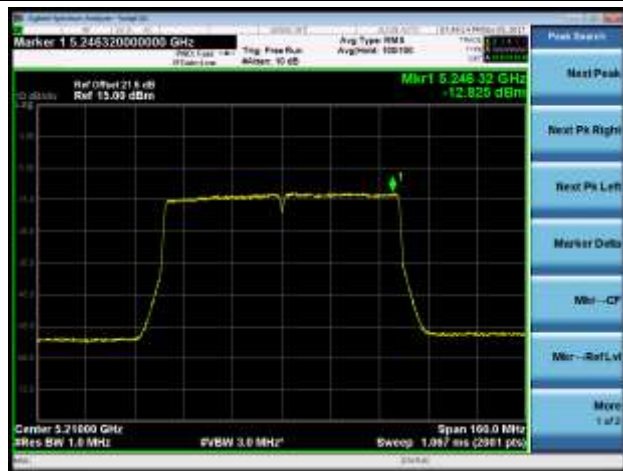


Channel 58 (5290MHz)



Channel 106 (5530MHz)



Channel 122 (5610MHz)

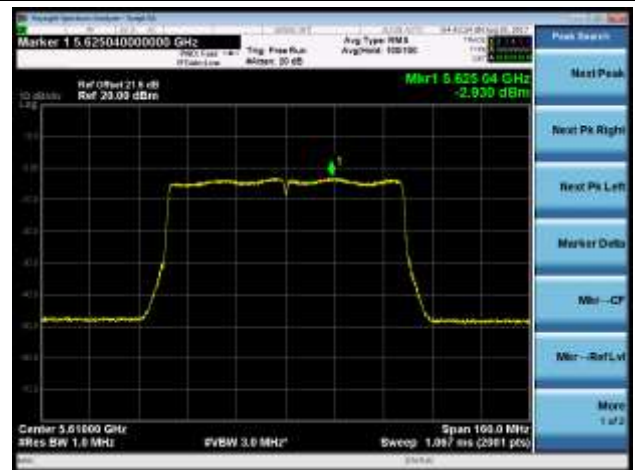

Channel 138 (5690MHz)




Channel 155 (5775MHz)




802.11ac-VHT80+80 Power Spectral Density - Ant 3 / Ant 2 + 3 (Ant 0 + 1 + 2 + 3) (Beam-Forming Mode)


Channel 42 (5210MHz)

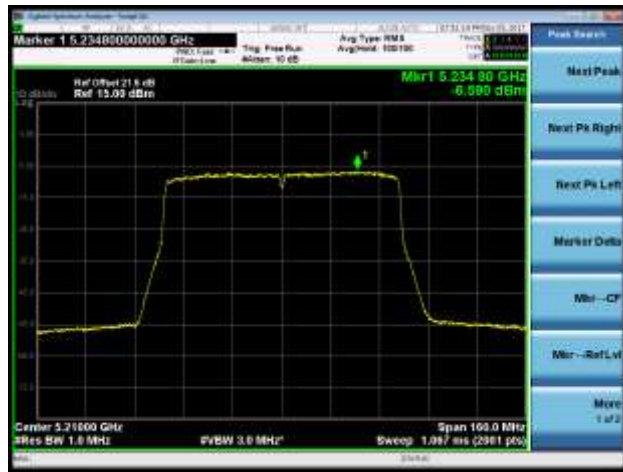


Channel 58 (5290MHz)

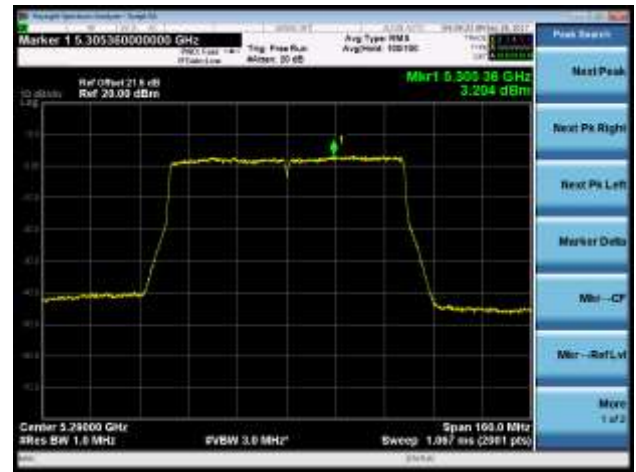


Channel 106 (5530MHz)

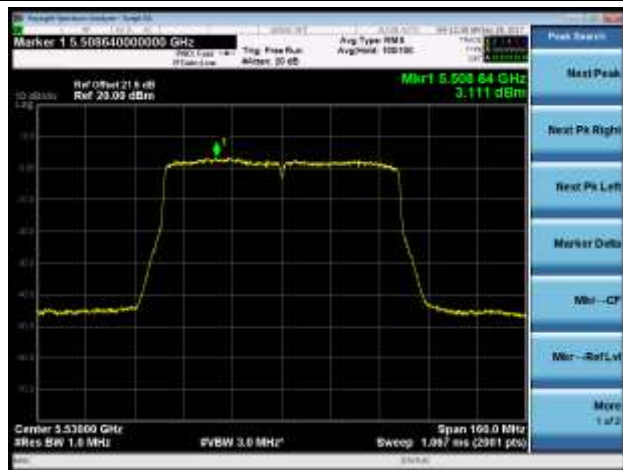

Channel 122 (5610MHz)

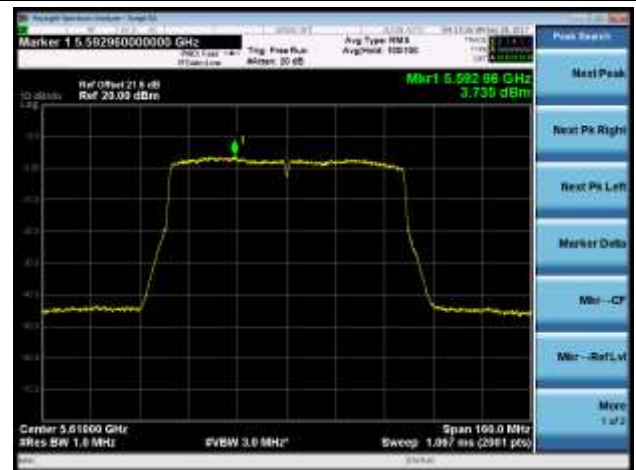

Channel 138 (5690MHz)

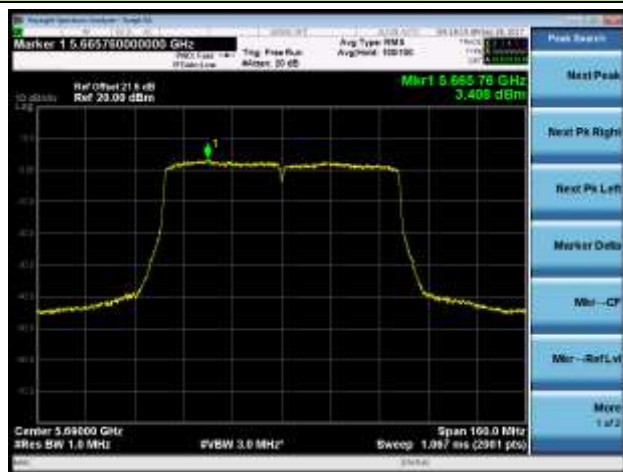


Channel 155 (5775MHz)



7. 操作頻帶外的峰值發射測試結果

Site: AC1	Time: 2017/08/16 - 18:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

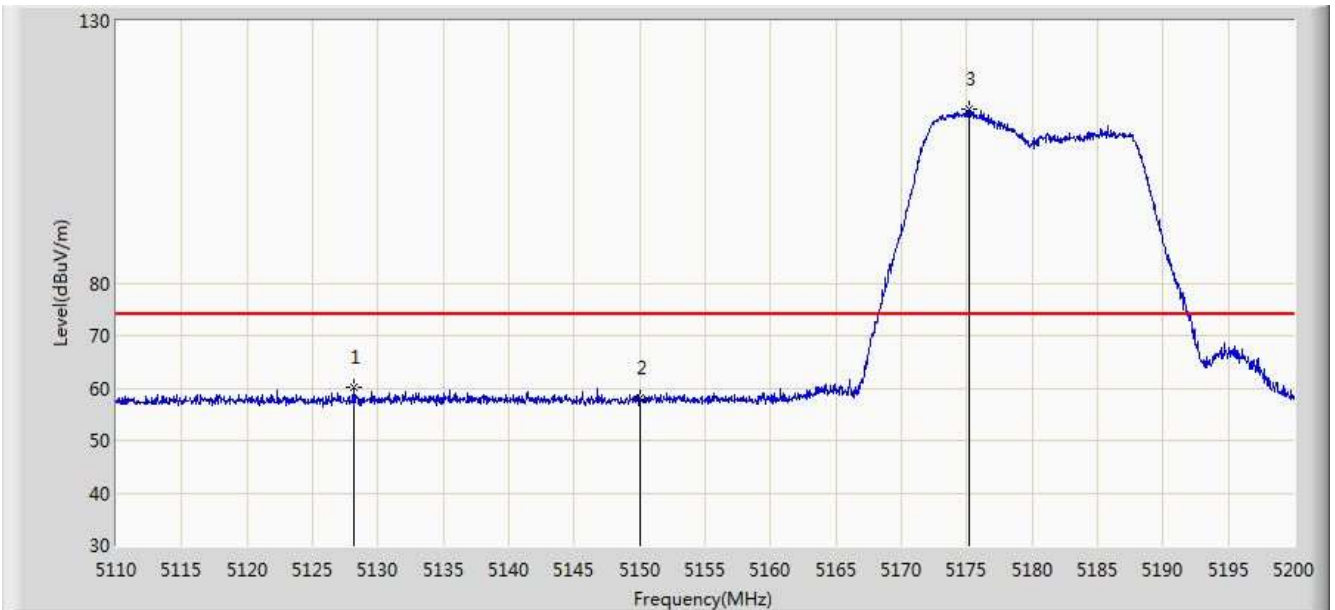


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5128.135	60.051	55.876	-13.949	74.000	4.174	PK
2			5150.000	58.060	53.891	-15.940	74.000	4.170	PK
3		*	5175.160	113.084	108.998	N/A	N/A	4.086	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 18:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

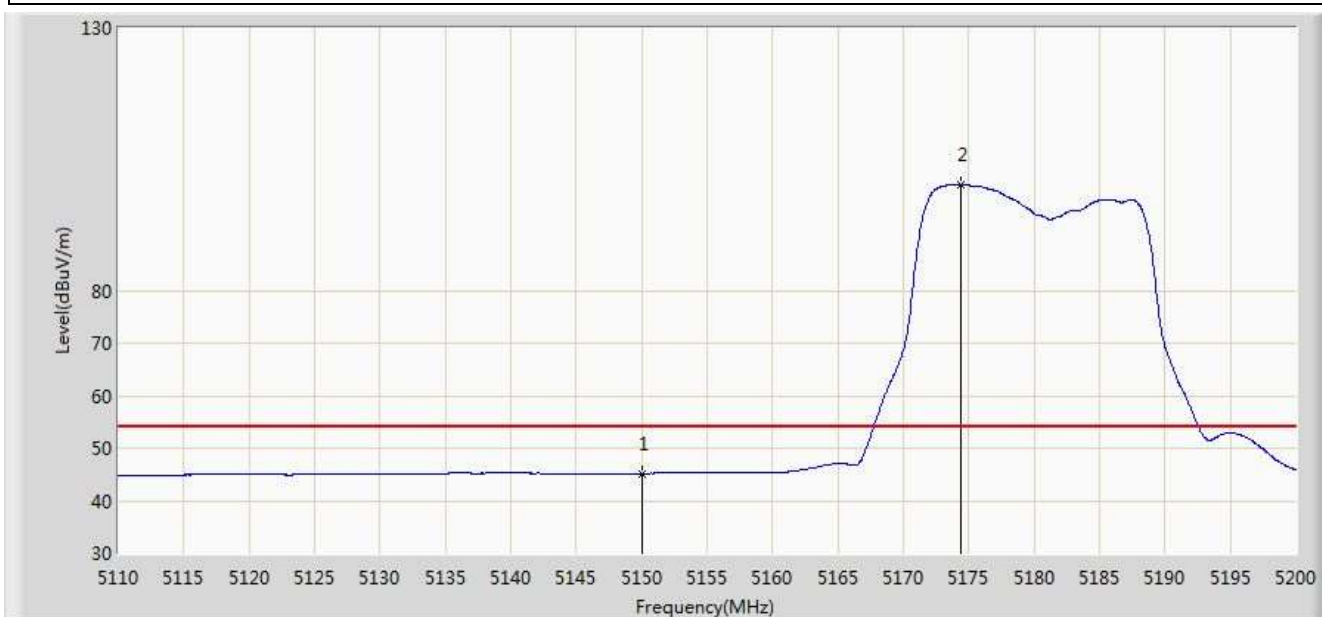


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.153	40.984	-8.847	54.000	4.170	AV
2		*	5174.350	100.216	96.127	N/A	N/A	4.088	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 18:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

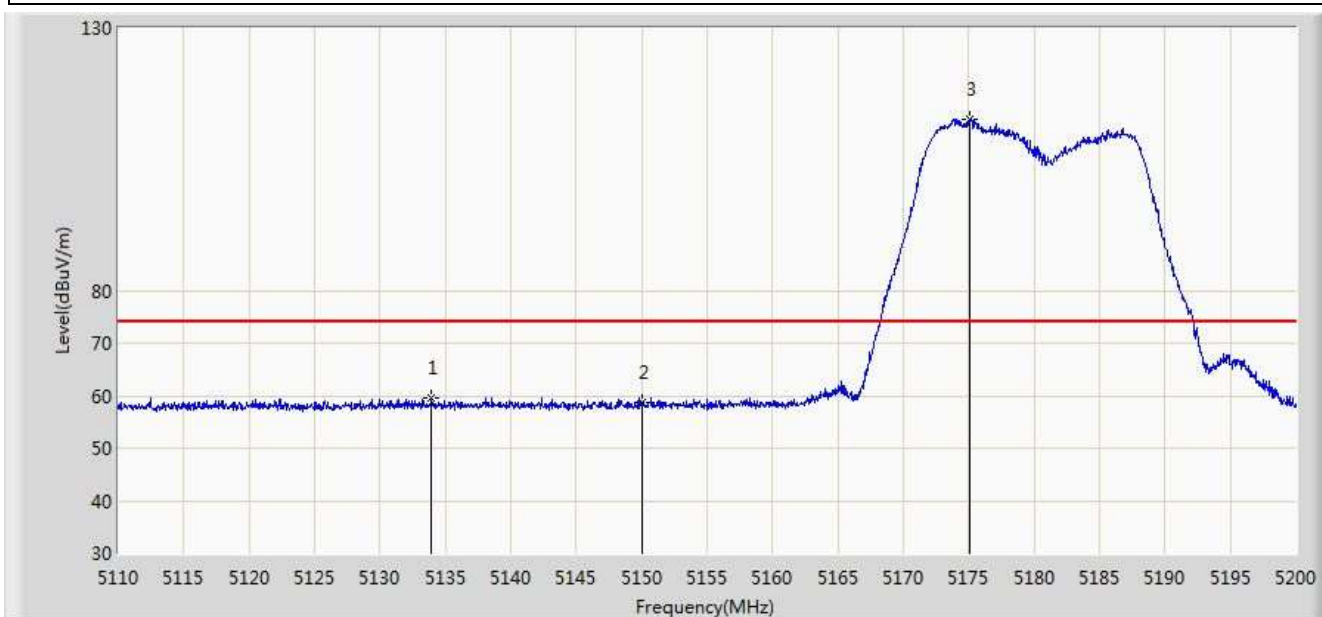


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.940	59.620	55.445	-14.380	74.000	4.175	PK
2			5150.000	58.558	54.389	-15.442	74.000	4.170	PK
3		*	5175.115	112.530	108.444	N/A	N/A	4.086	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 18:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

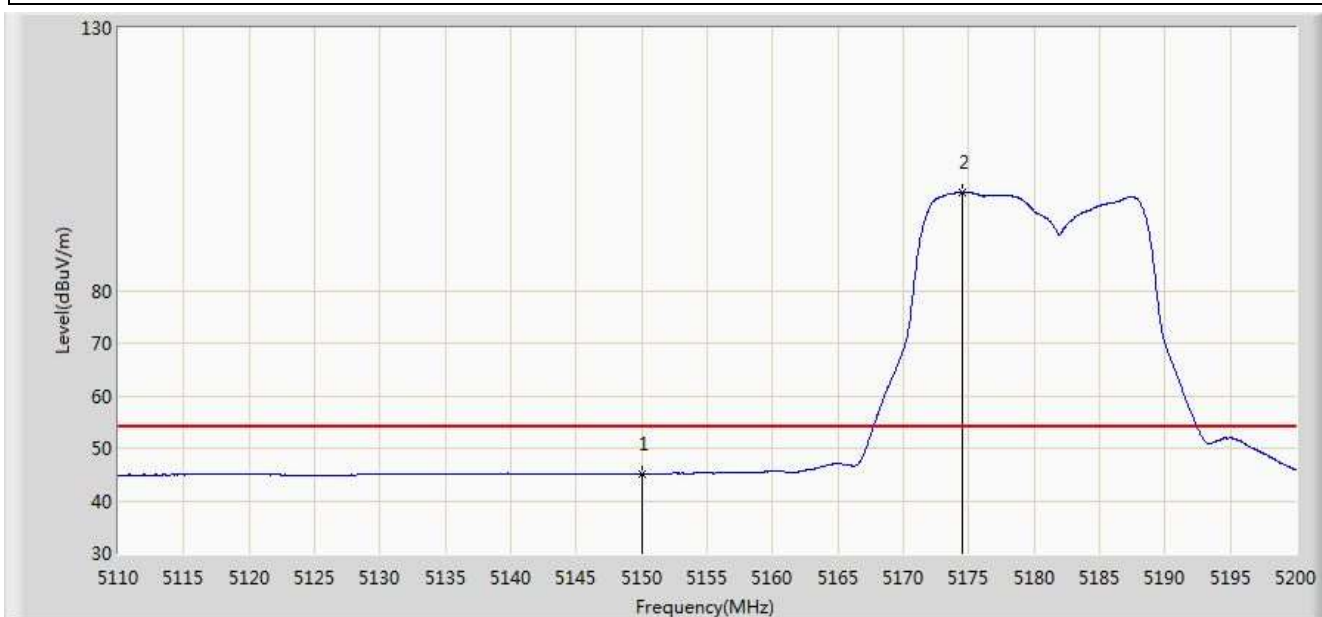


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.083	40.914	-8.917	54.000	4.170	AV
2		*	5174.485	98.642	94.554	N/A	N/A	4.089	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

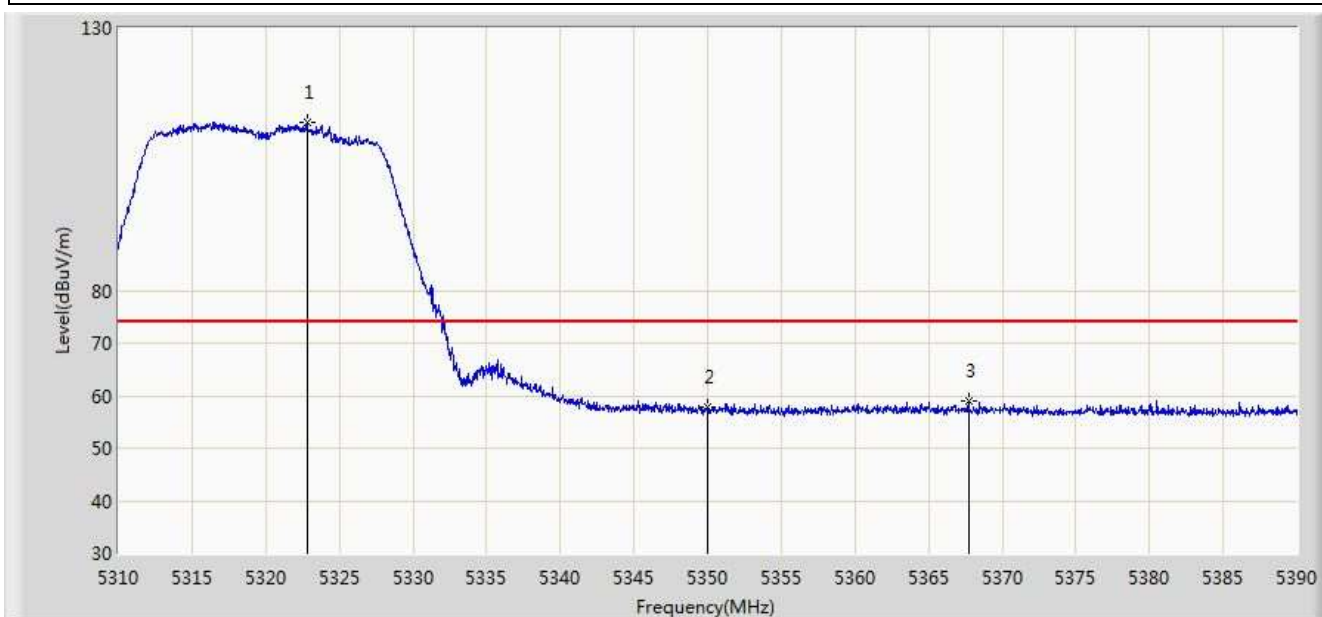


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.800	112.089	108.235	N/A	N/A	3.854	PK
2			5350.000	57.741	53.836	-16.259	74.000	3.904	PK
3			5367.720	58.883	54.946	-15.117	74.000	3.937	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

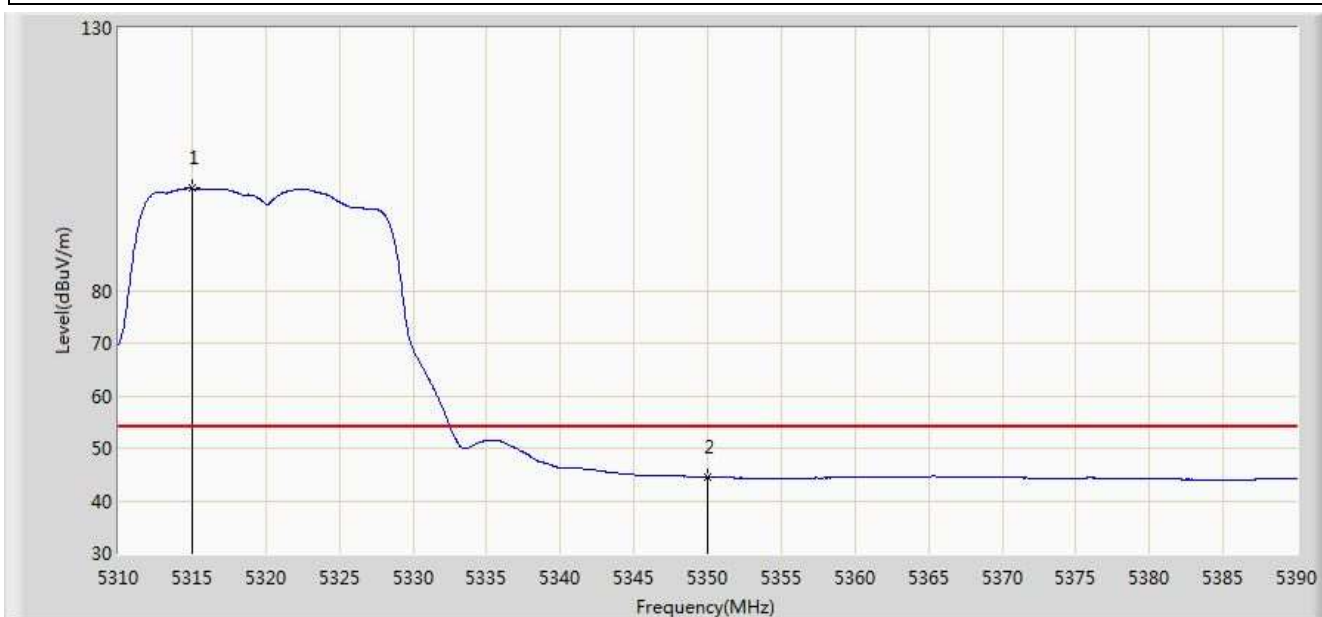


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.040	99.432	95.593	N/A	N/A	3.839	AV
2			5350.000	44.504	40.599	-9.496	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

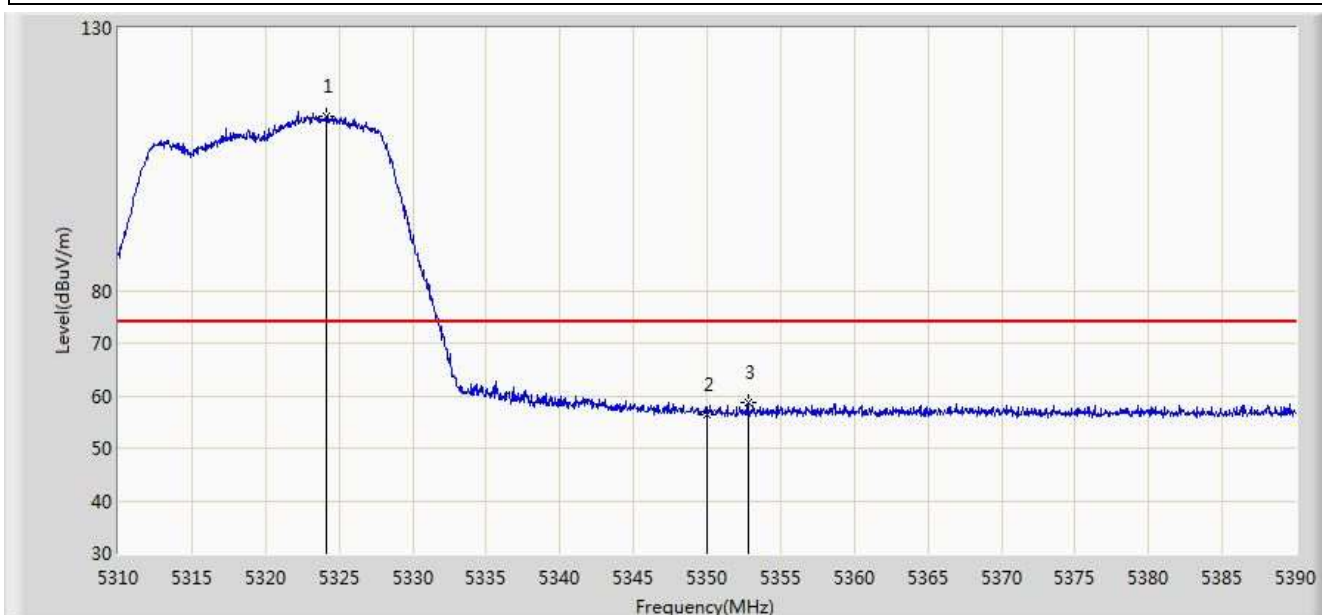


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.160	113.319	109.463	N/A	N/A	3.857	PK
2			5350.000	56.293	52.388	-17.707	74.000	3.904	PK
3			5352.800	58.673	54.763	-15.327	74.000	3.910	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

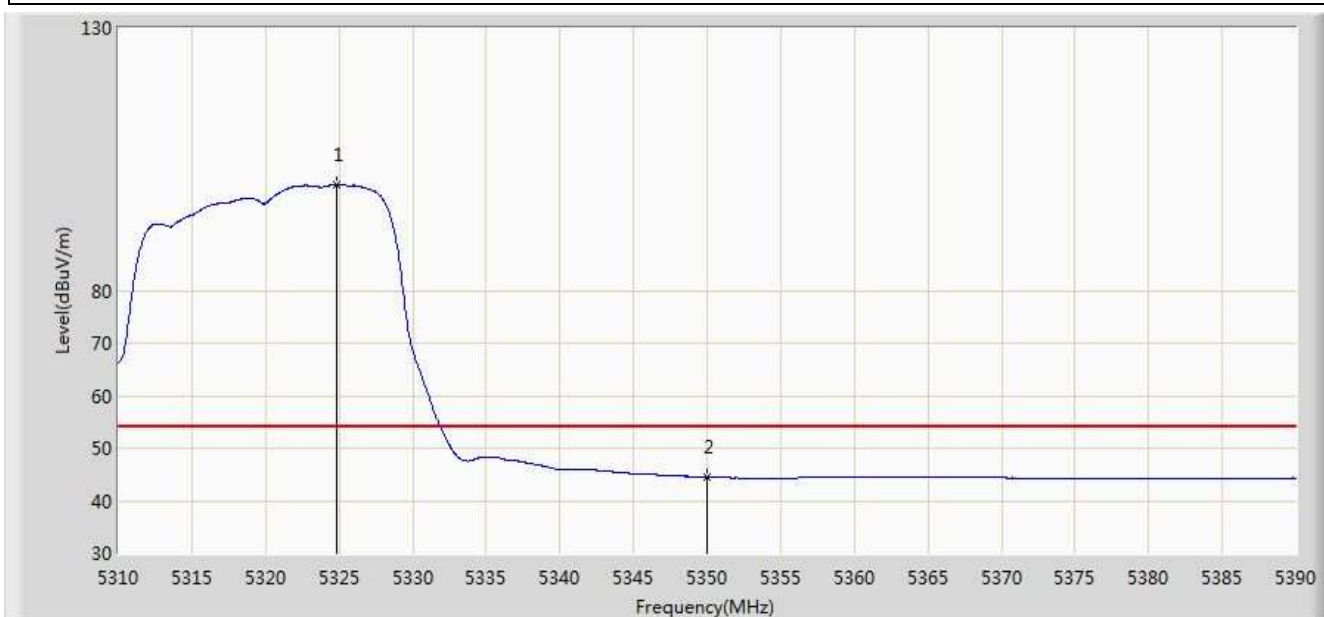


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.880	100.116	96.258	N/A	N/A	3.858	AV
2			5350.000	44.490	40.585	-9.510	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

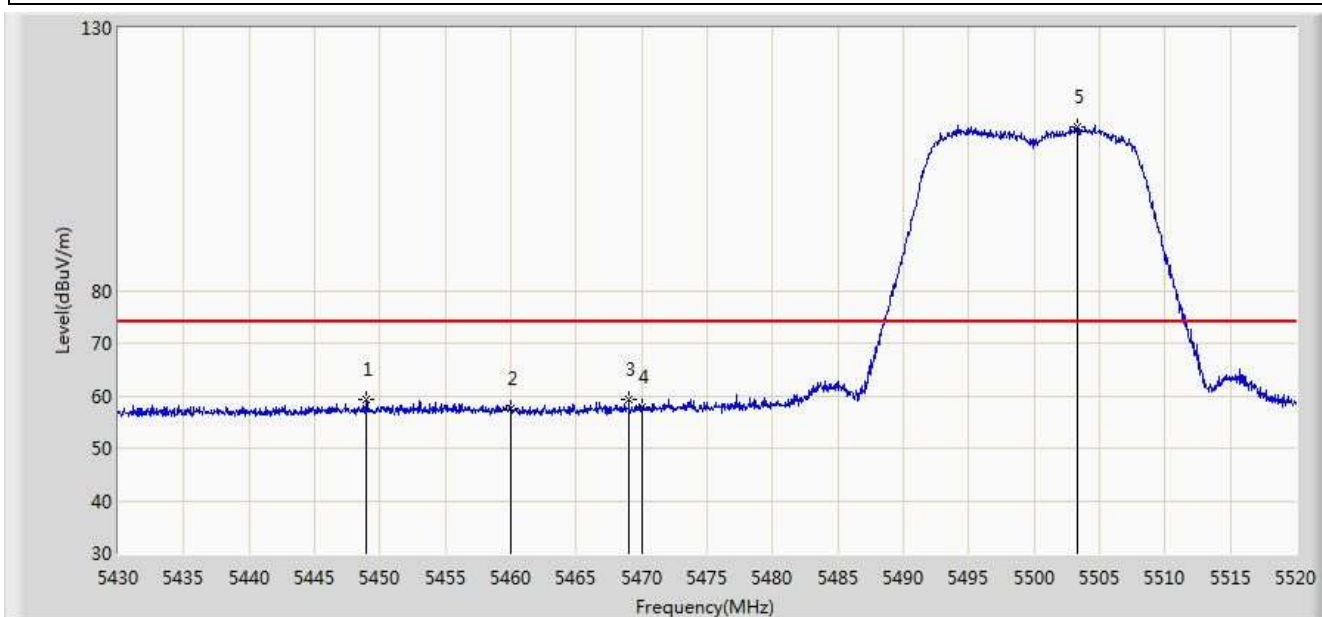


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.945	59.217	55.065	-14.783	74.000	4.152	PK
2			5460.000	57.572	53.392	-16.428	74.000	4.180	PK
3			5469.015	59.194	54.994	-14.806	74.000	4.201	PK
4			5470.000	57.783	53.581	-16.217	74.000	4.202	PK
5		*	5503.260	111.292	107.010	N/A	N/A	4.281	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

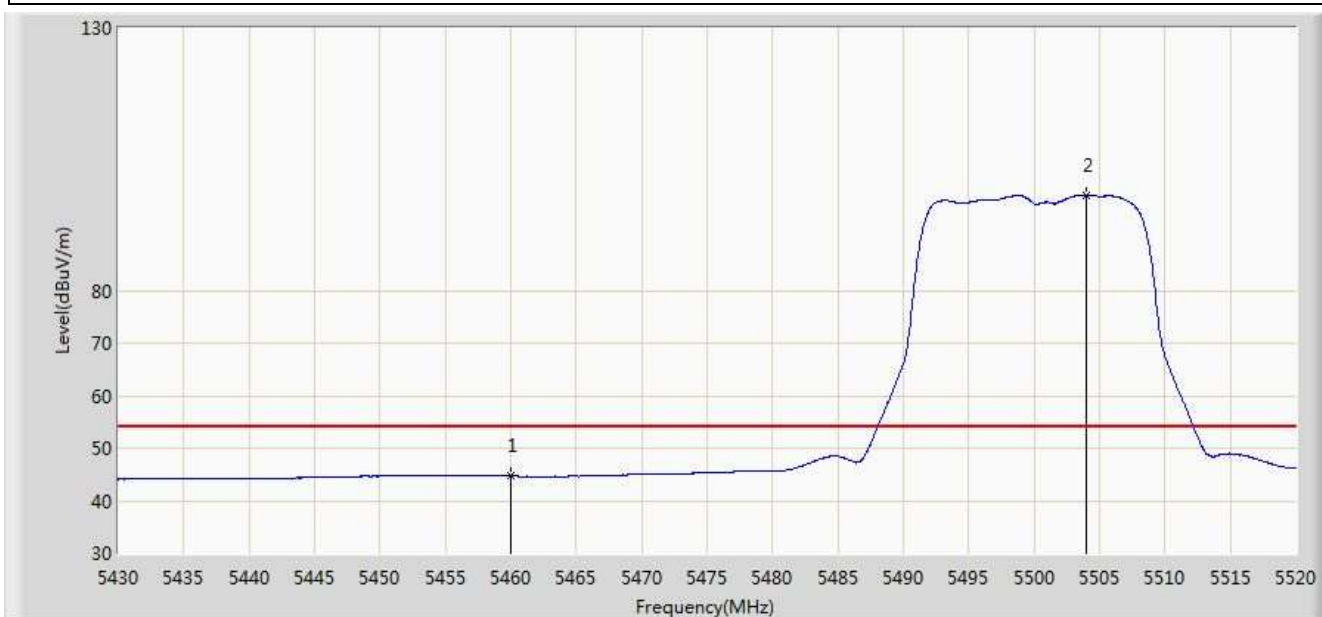


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.705	40.525	-9.295	54.000	4.180	AV
2		*	5503.980	98.223	93.939	N/A	N/A	4.284	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

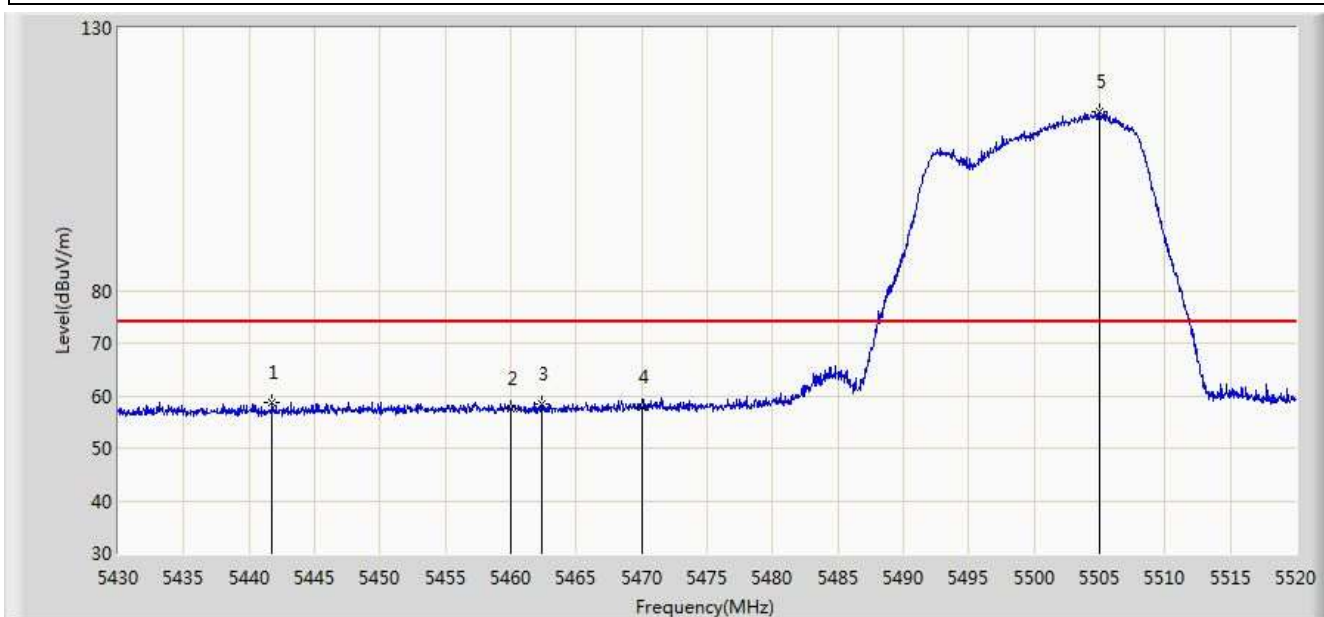


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5441.745	58.812	54.682	-15.188	74.000	4.130	PK
2			5460.000	57.490	53.310	-16.510	74.000	4.180	PK
3			5462.400	58.493	54.308	-15.507	74.000	4.185	PK
4			5470.000	57.944	53.742	-16.056	74.000	4.202	PK
5		*	5505.015	114.000	109.713	N/A	N/A	4.287	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

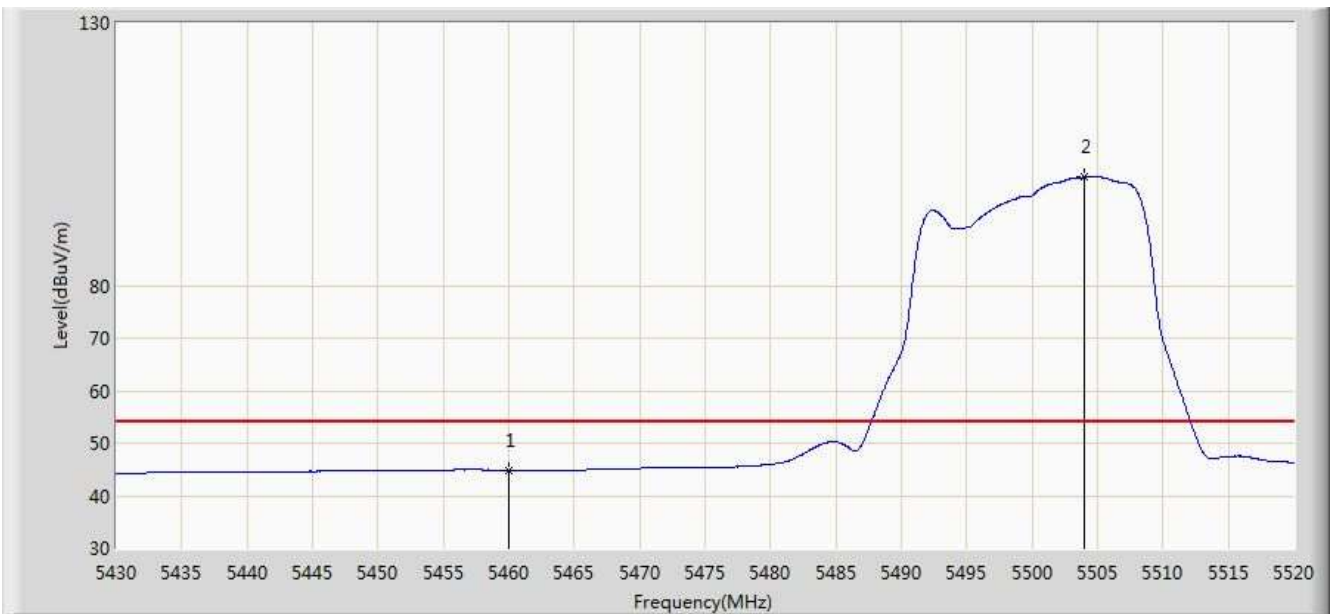


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.808	40.628	-9.192	54.000	4.180	AV
2		*	5504.025	100.670	96.386	N/A	N/A	4.284	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

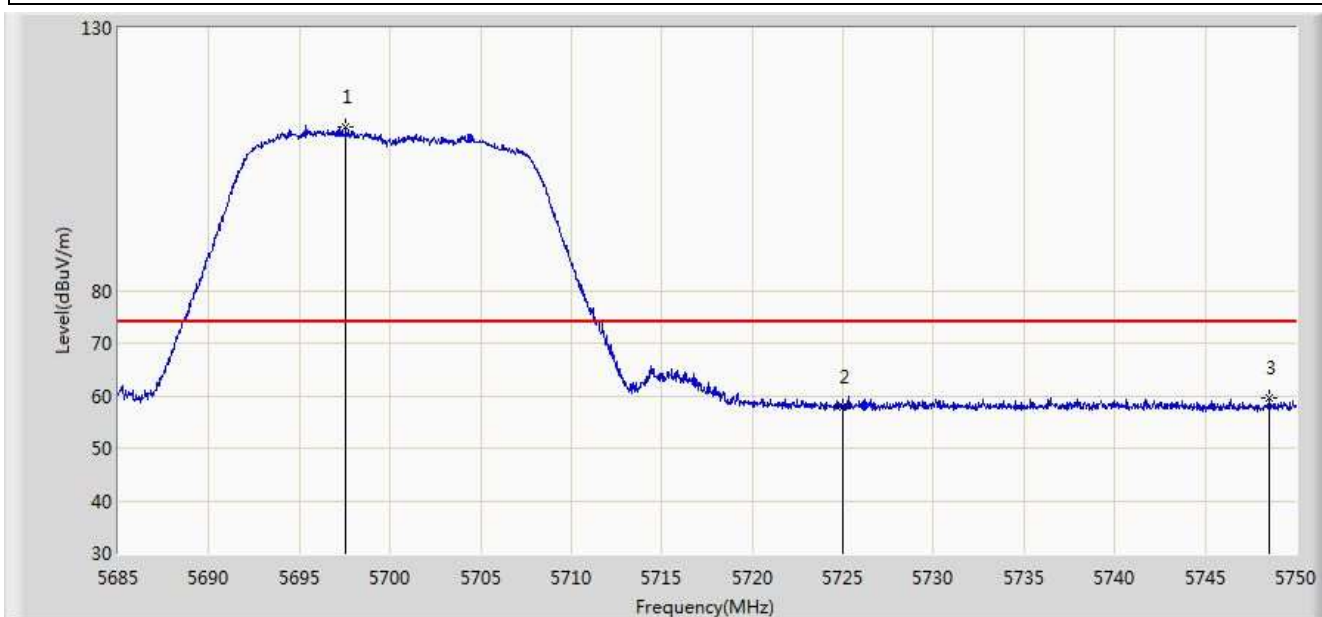


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.578	111.250	106.385	N/A	N/A	4.865	PK
2			5725.000	57.829	52.800	-16.171	74.000	5.029	PK
3			5748.570	59.710	54.535	-14.290	74.000	5.175	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

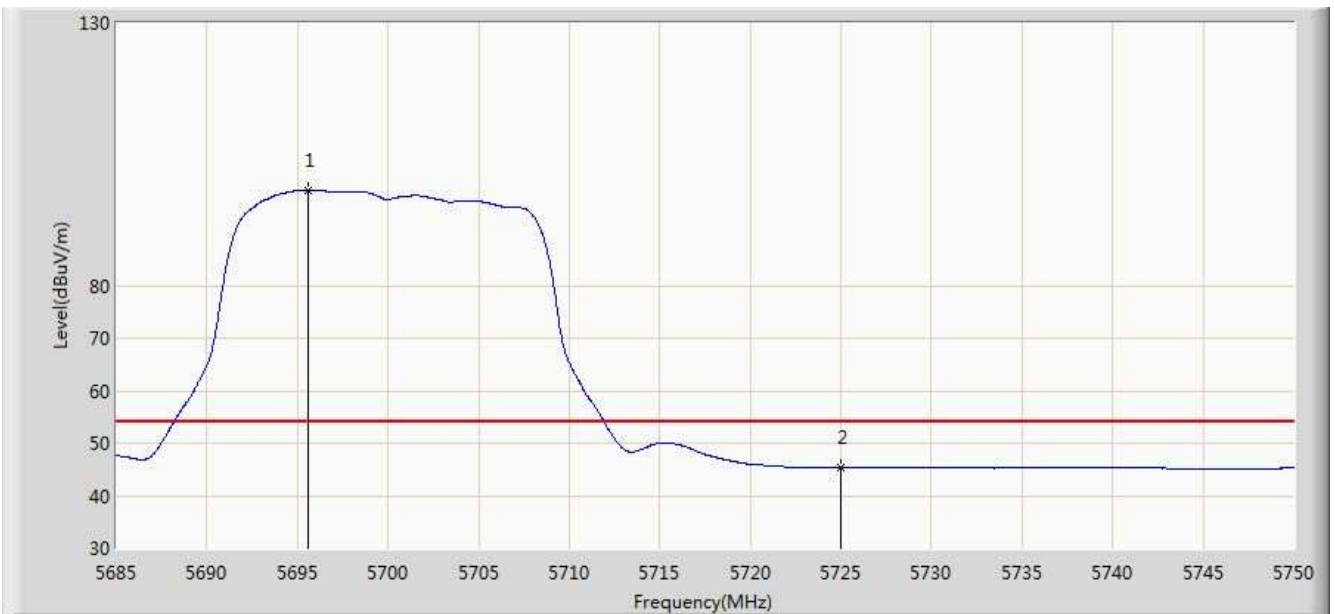


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.595	98.178	93.323	N/A	N/A	4.855	AV
2			5725.000	45.337	40.308	-8.663	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

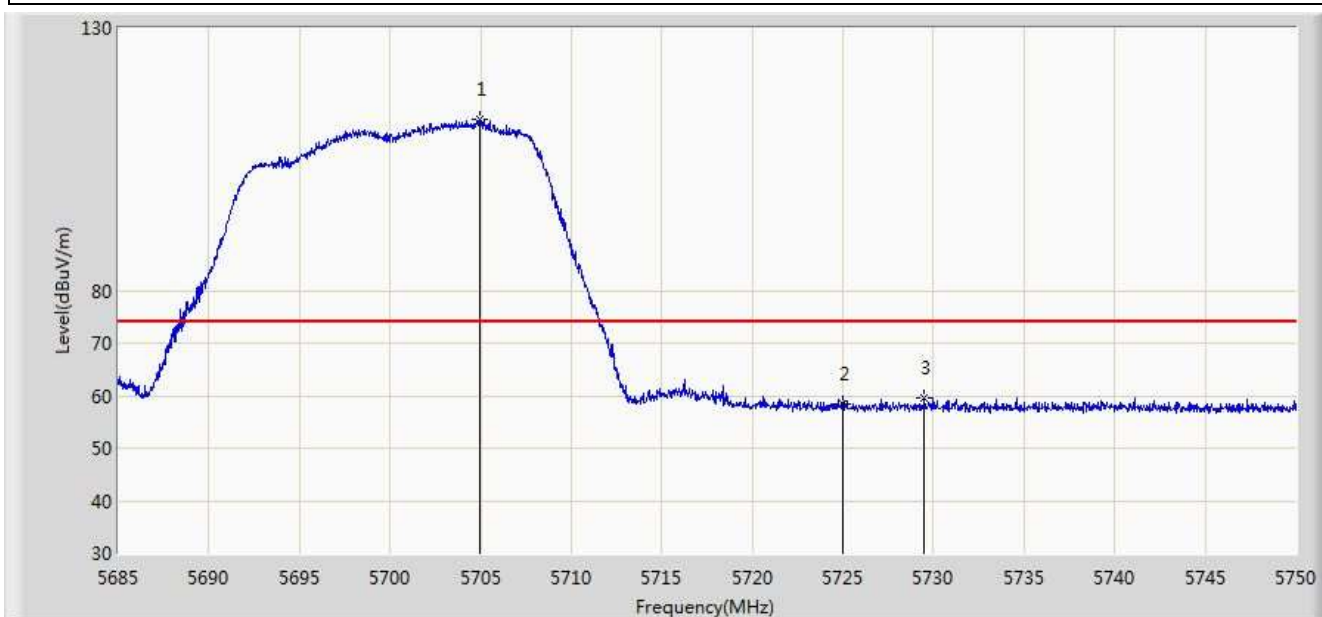


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.987	112.530	107.625	N/A	N/A	4.905	PK
2			5725.000	58.346	53.317	-15.654	74.000	5.029	PK
3			5729.493	59.501	54.443	-14.499	74.000	5.058	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

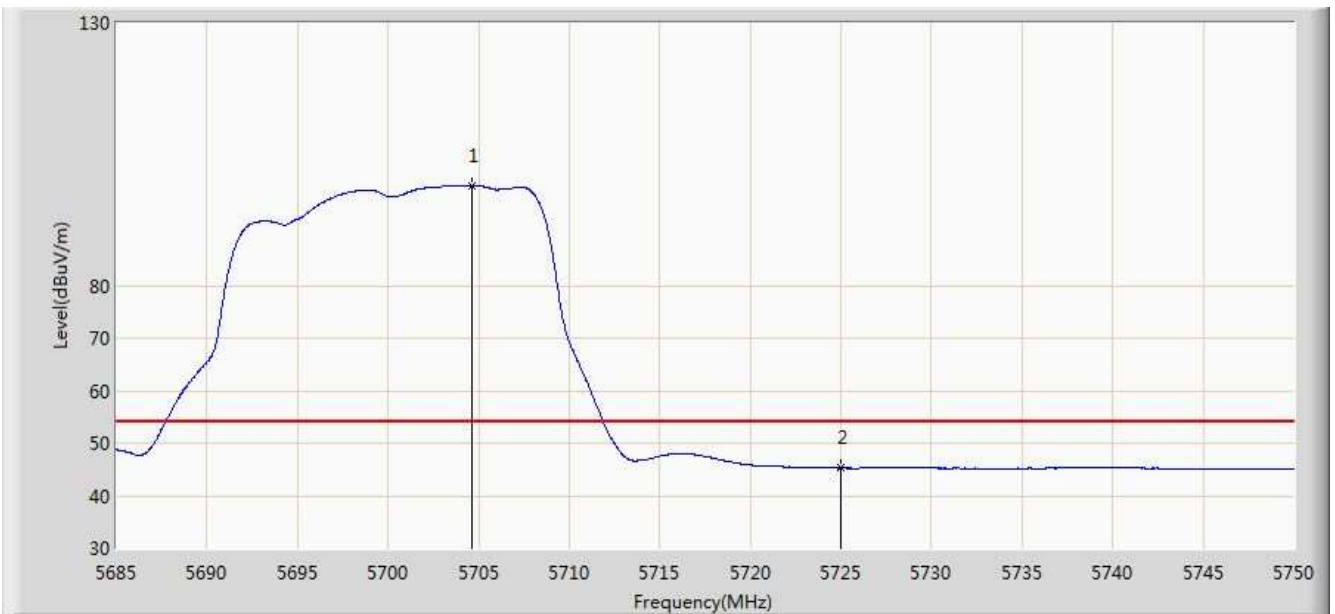


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.630	99.104	94.201	N/A	N/A	4.903	AV
2			5725.000	45.252	40.223	-8.748	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 16:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

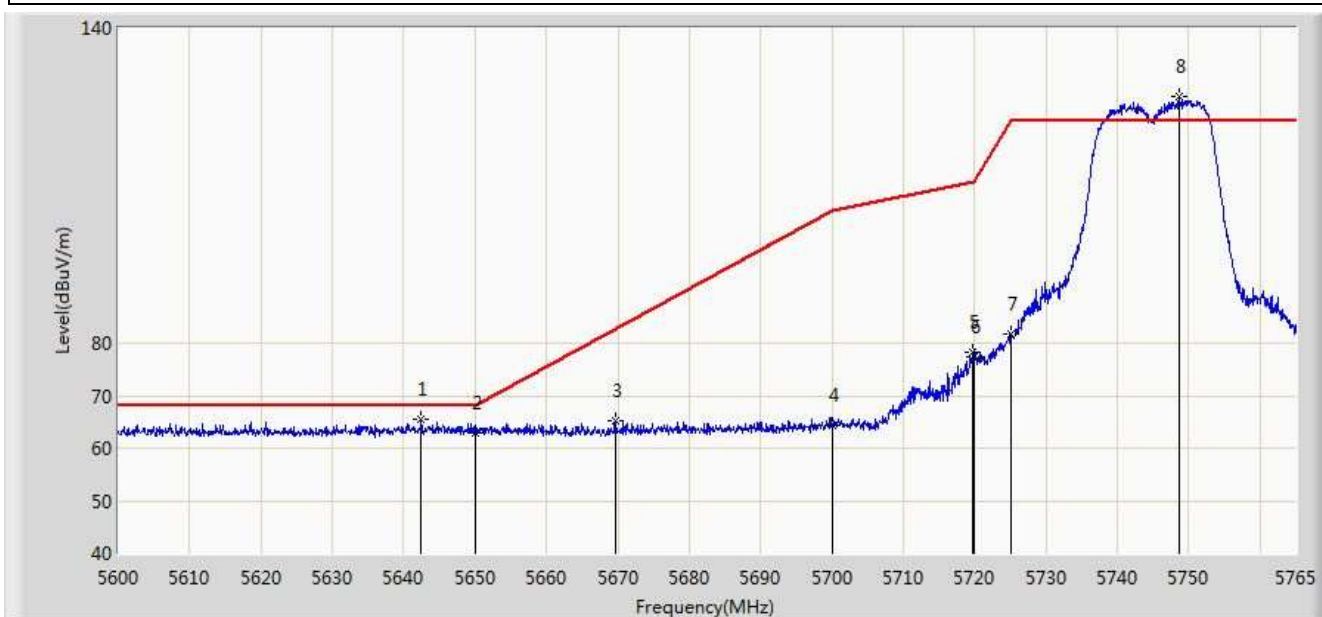


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5642.487	65.576	60.930	-2.624	68.200	4.646	PK
2			5650.000	62.797	58.126	-5.403	68.200	4.671	PK
3			5669.630	65.317	60.571	-17.449	82.765	4.745	PK
4			5700.000	64.333	59.455	-40.867	105.200	4.878	PK
5			5719.790	78.161	73.165	-32.581	110.741	4.995	PK
6			5720.000	77.456	72.459	-33.344	110.800	4.997	PK
7			5725.000	81.724	76.695	-40.476	122.200	5.029	PK
8		*	5748.583	126.914	121.739	N/A	N/A	5.175	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 16:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

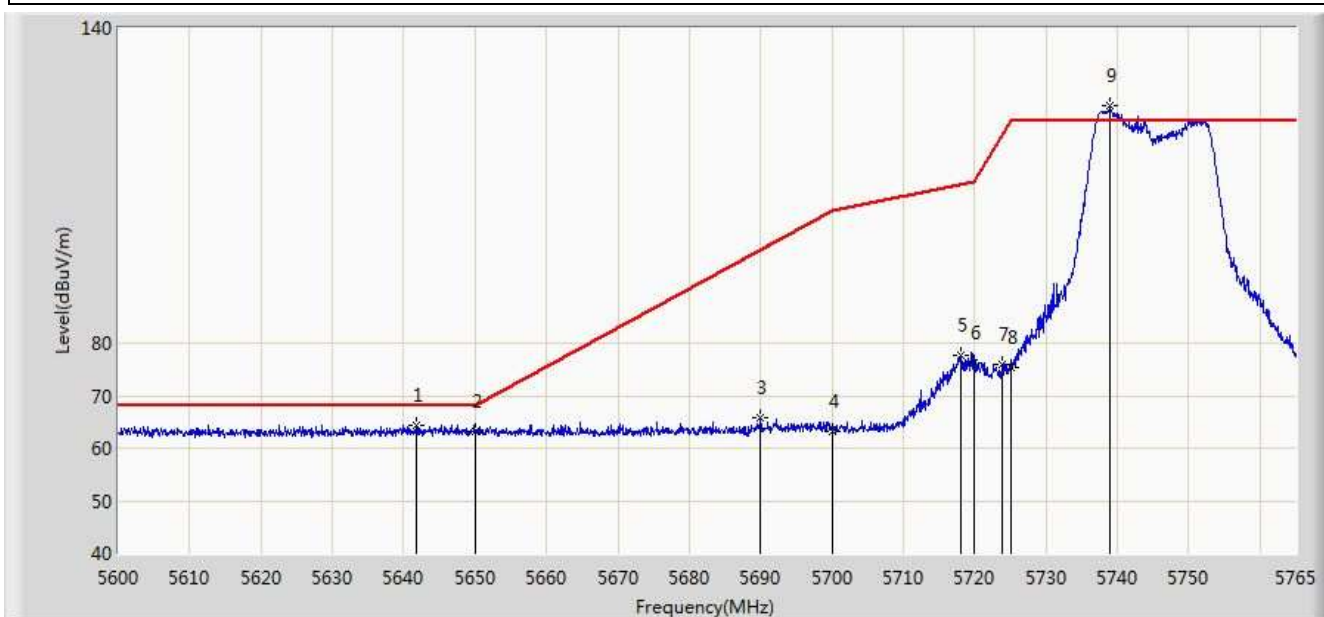


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.828	64.361	59.717	-3.839	68.200	4.644	PK
2			5650.000	63.055	58.384	-5.145	68.200	4.671	PK
3			5690.007	65.845	61.017	-31.987	97.831	4.828	PK
4			5700.000	63.264	58.386	-41.936	105.200	4.878	PK
5			5717.975	77.632	72.648	-32.602	110.234	4.984	PK
6			5720.000	76.105	71.108	-34.695	110.800	4.997	PK
7			5723.750	76.003	70.982	-43.348	119.351	5.021	PK
8			5725.000	75.408	70.379	-46.792	122.200	5.029	PK
9		*	5739.013	125.268	120.150	N/A	N/A	5.119	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 16:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

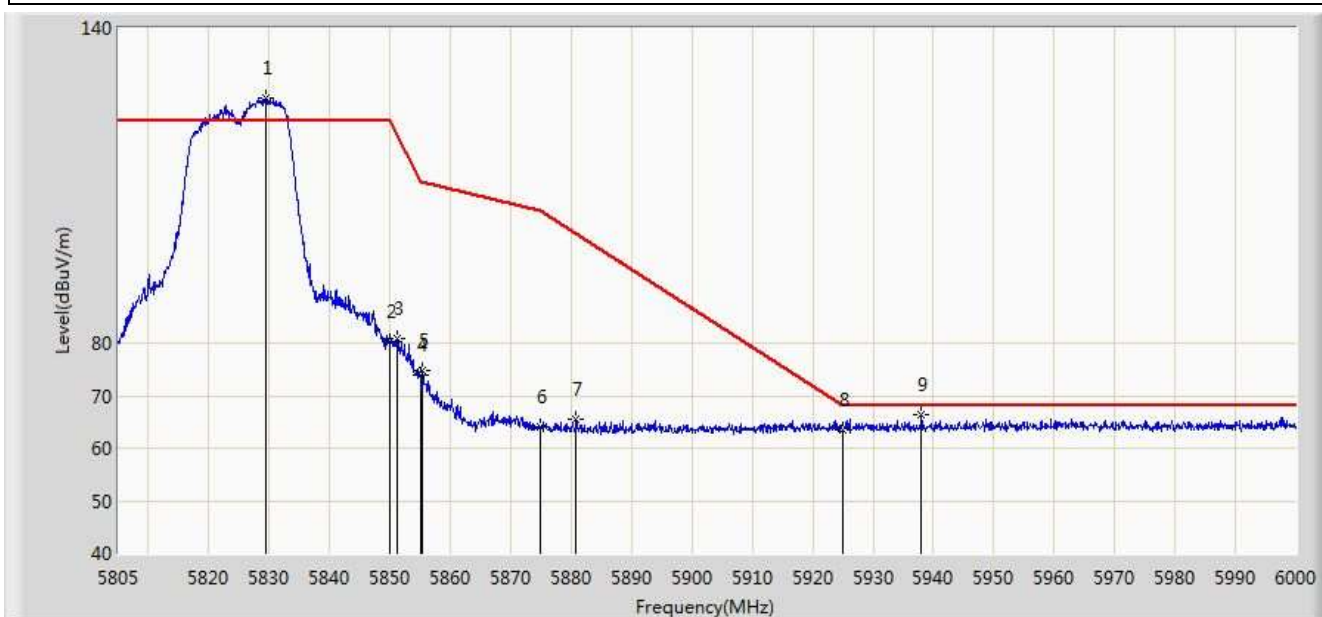


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5829.473	126.687	121.073	N/A	N/A	5.614	PK
2			5850.000	80.214	74.488	-41.986	122.200	5.726	PK
3			5851.215	80.748	75.017	-38.681	119.429	5.731	PK
4			5855.000	73.820	68.074	-36.980	110.800	5.746	PK
5			5855.408	74.655	68.907	-36.031	110.686	5.749	PK
6			5875.000	64.059	58.239	-41.141	105.200	5.820	PK
7			5880.757	65.375	59.535	-35.549	100.924	5.840	PK
8			5925.000	63.448	57.482	-4.752	68.200	5.967	PK
9			5937.990	66.377	60.378	-1.823	68.200	5.998	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 16:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

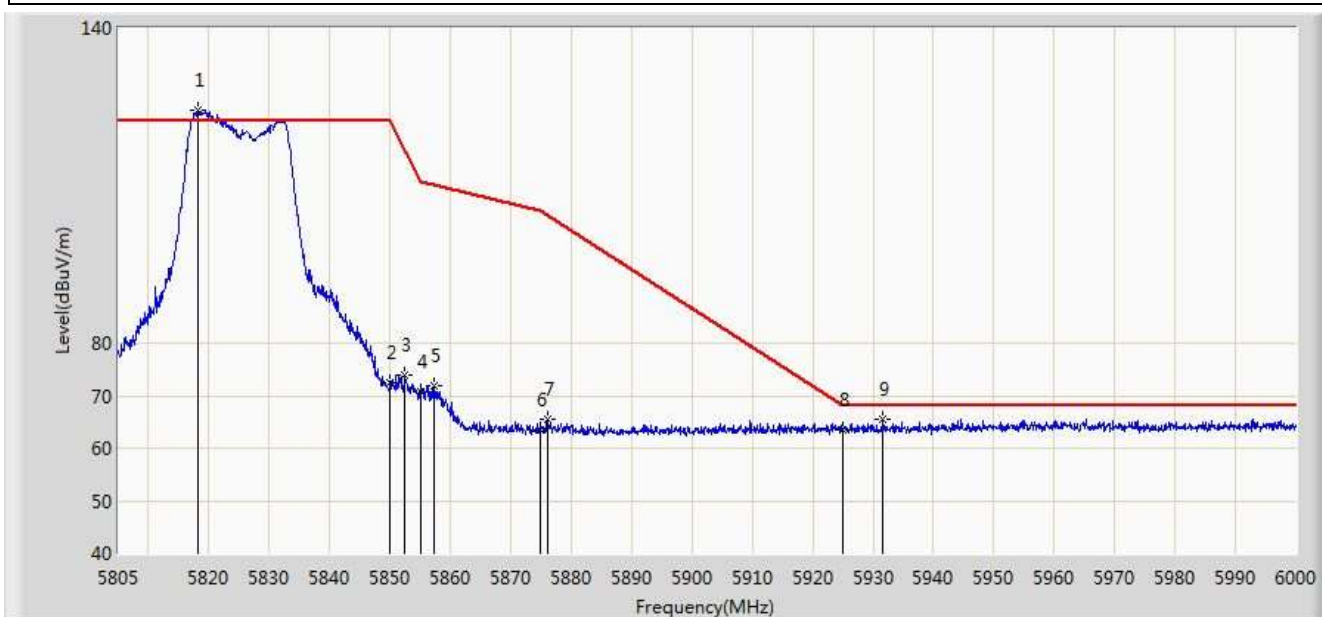


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.163	124.348	118.800	N/A	N/A	5.547	PK
2			5850.000	72.397	66.671	-49.803	122.200	5.726	PK
3			5852.482	73.995	68.259	-42.545	116.540	5.736	PK
4			5855.000	70.749	65.003	-40.051	110.800	5.746	PK
5			5857.357	71.972	66.216	-38.167	110.139	5.756	PK
6			5875.000	63.347	57.527	-41.853	105.200	5.820	PK
7			5876.078	65.556	59.732	-38.843	104.399	5.824	PK
8			5925.000	63.615	57.649	-4.585	68.200	5.967	PK
9			5931.652	65.434	59.451	-2.766	68.200	5.983	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 18:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

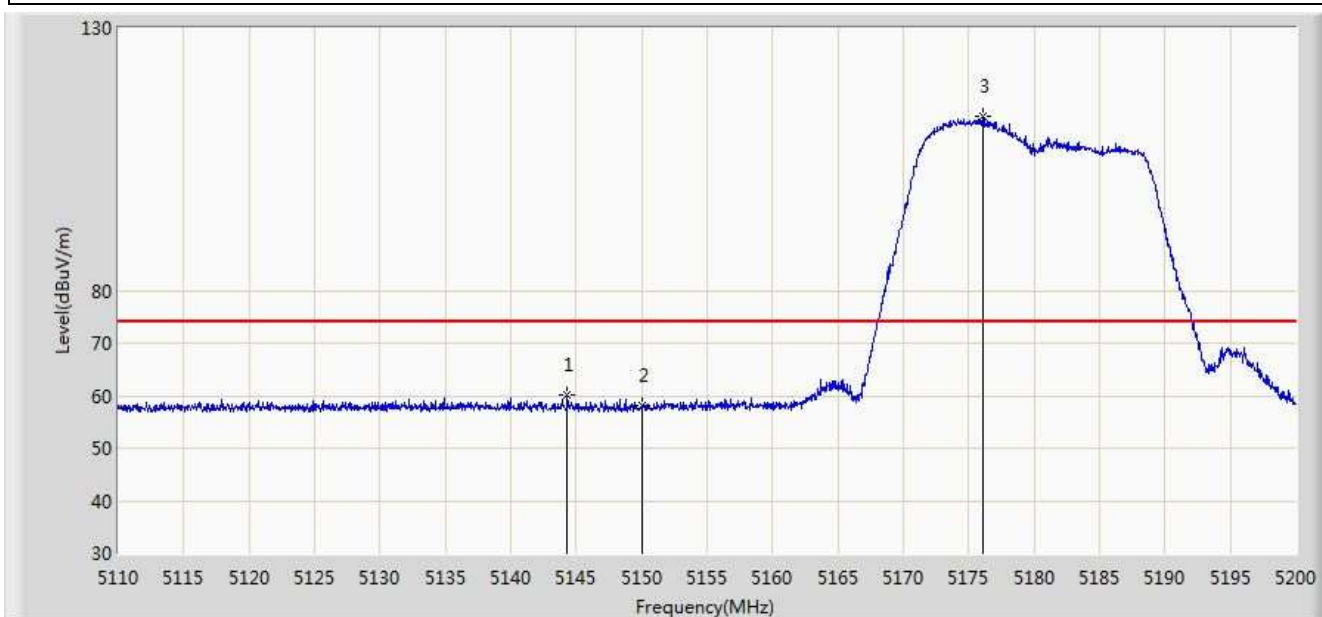


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.335	60.103	55.927	-13.897	74.000	4.176	PK
2			5150.000	58.040	53.871	-15.960	74.000	4.170	PK
3		*	5176.060	113.267	109.184	N/A	N/A	4.083	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 19:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

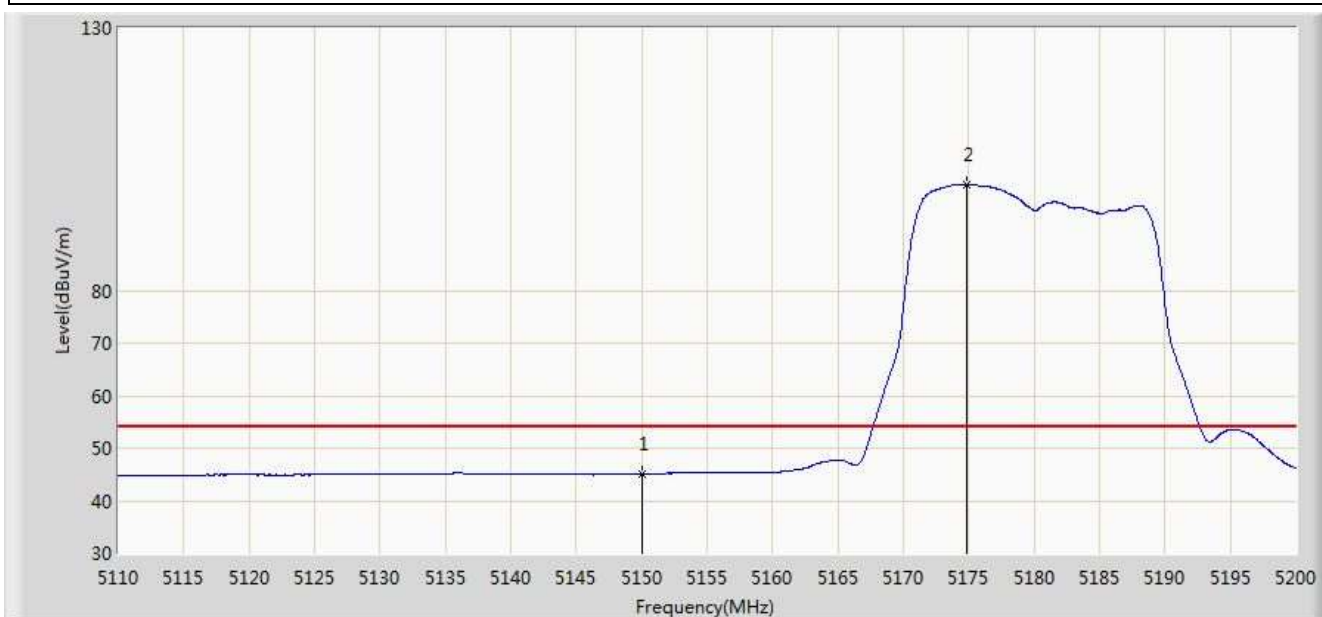


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.045	40.876	-8.955	54.000	4.170	AV
2		*	5174.890	100.192	96.105	N/A	N/A	4.087	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 19:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

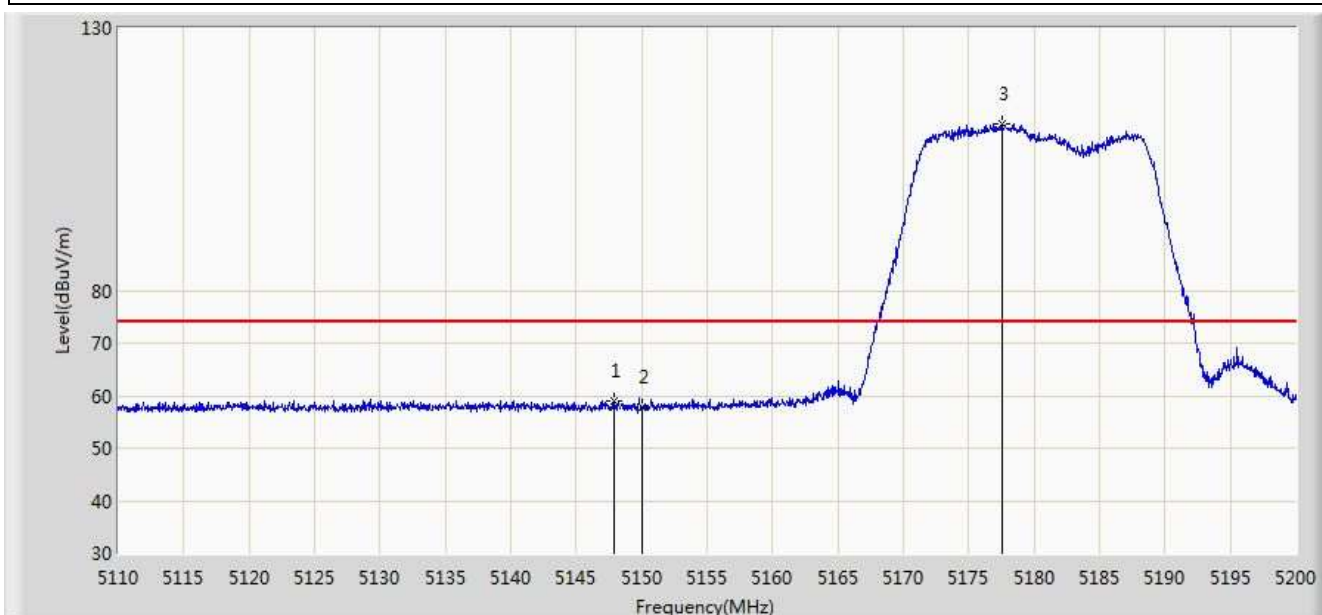


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.845	59.063	54.887	-14.937	74.000	4.176	PK
2			5150.000	57.793	53.624	-16.207	74.000	4.170	PK
3		*	5177.545	111.727	107.649	N/A	N/A	4.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 19:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

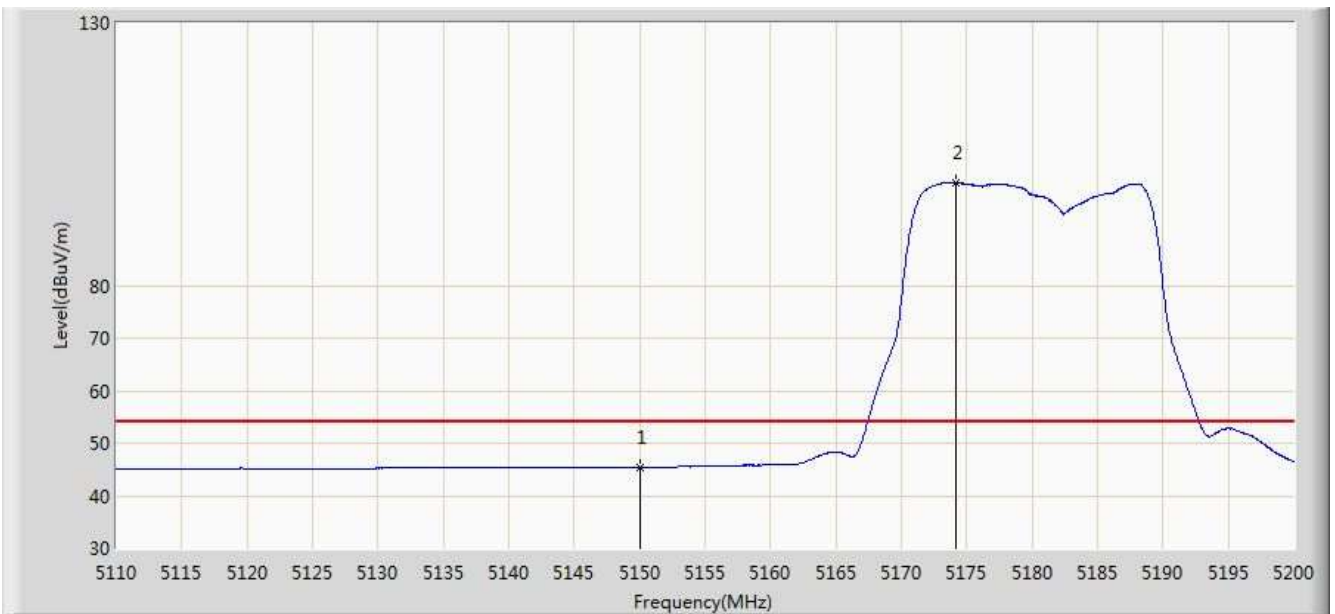


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.350	41.181	-8.650	54.000	4.170	AV
2		*	5174.215	99.531	95.442	N/A	N/A	4.090	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

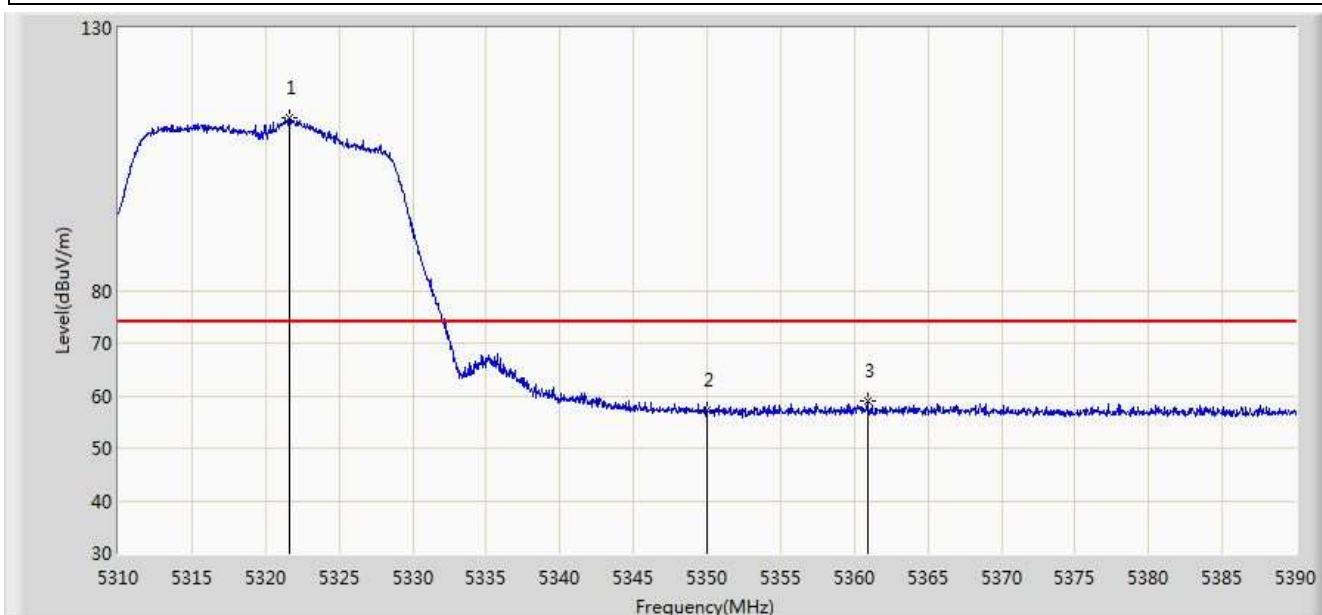


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.600	112.869	109.017	N/A	N/A	3.852	PK
2			5350.000	57.142	53.237	-16.858	74.000	3.904	PK
3			5360.880	58.986	55.062	-15.014	74.000	3.924	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

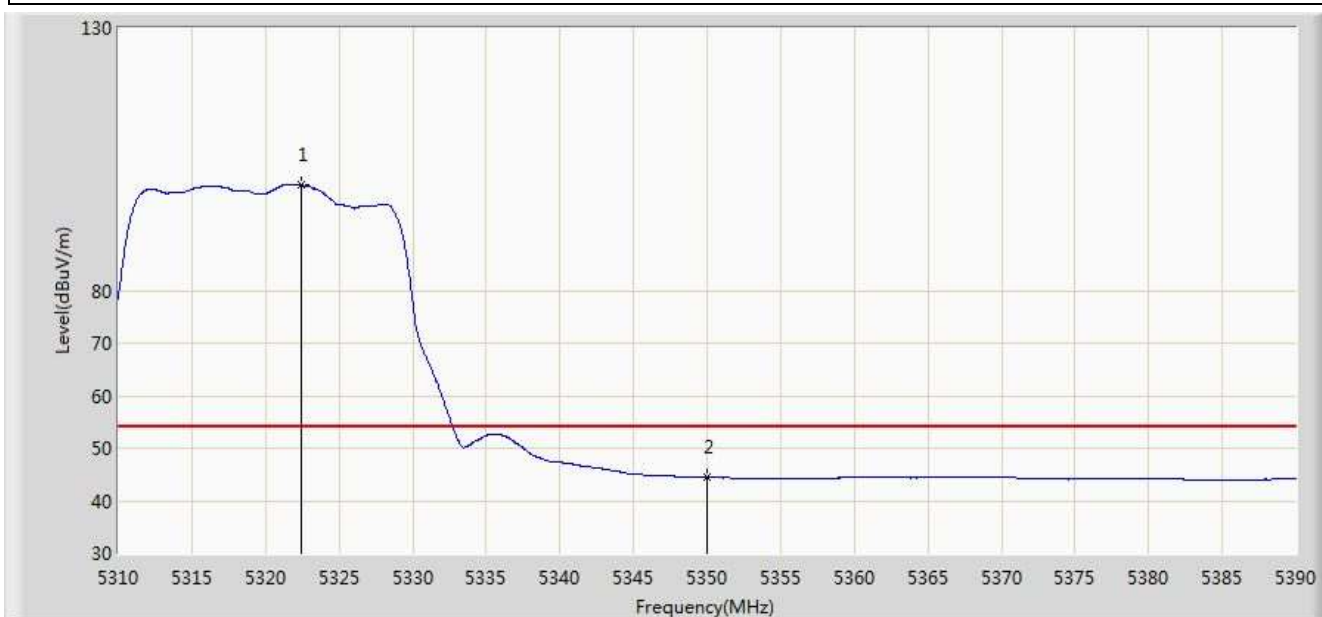


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.400	100.062	96.209	N/A	N/A	3.853	AV
2			5350.000	44.476	40.571	-9.524	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

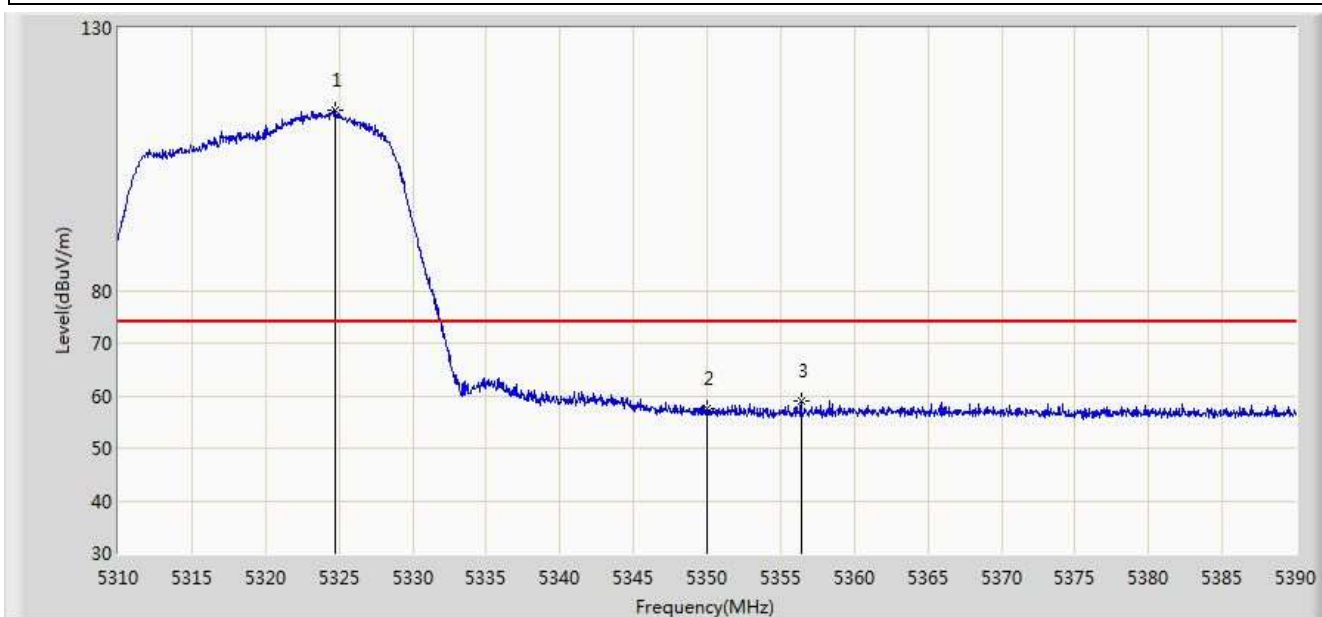


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.760	114.433	110.575	N/A	N/A	3.857	PK
2			5350.000	57.549	53.644	-16.451	74.000	3.904	PK
3			5356.400	58.986	55.070	-15.014	74.000	3.917	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

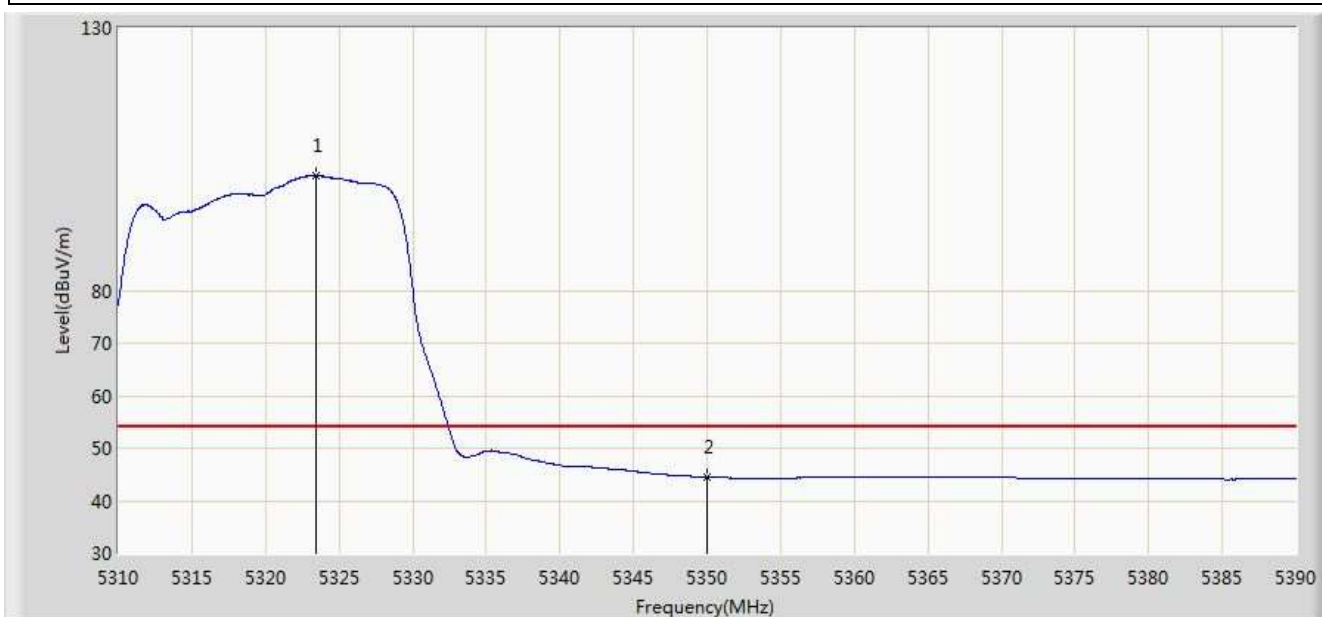


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.400	101.917	98.062	N/A	N/A	3.855	AV
2			5350.000	44.495	40.590	-9.505	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

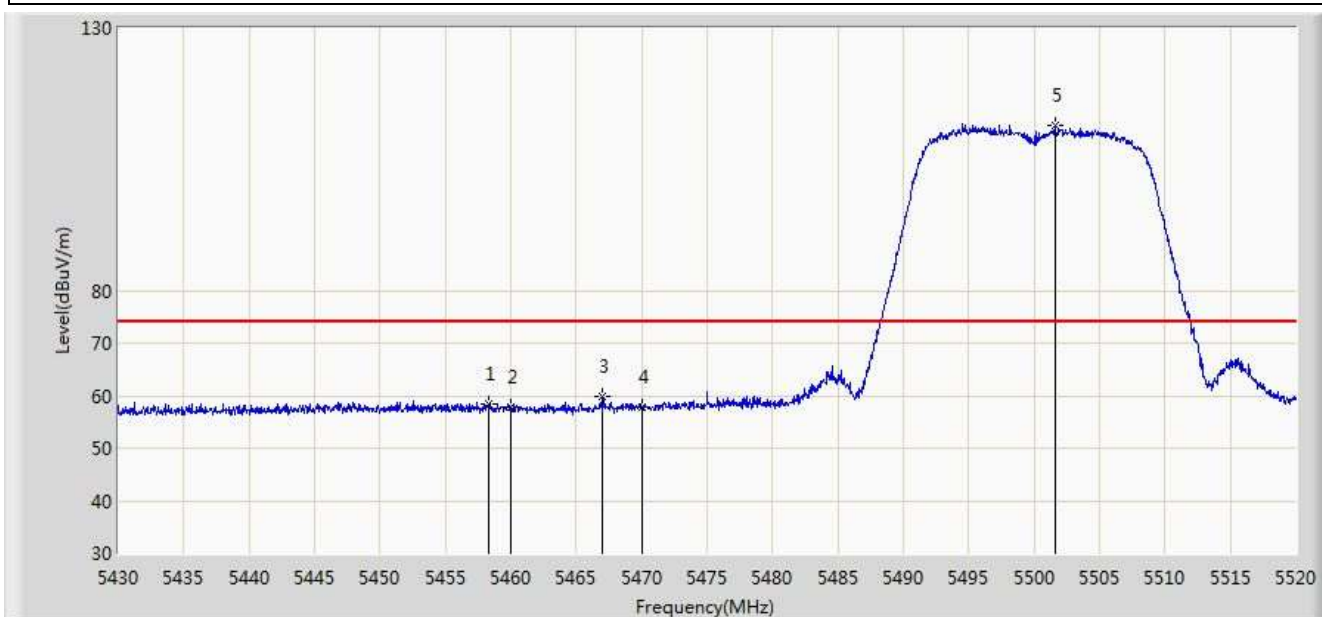


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.350	58.508	54.331	-15.492	74.000	4.177	PK
2			5460.000	57.792	53.612	-16.208	74.000	4.180	PK
3			5467.035	59.723	55.527	-14.277	74.000	4.196	PK
4			5470.000	57.832	53.630	-16.168	74.000	4.202	PK
5		*	5501.595	111.389	107.112	N/A	N/A	4.277	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 19:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

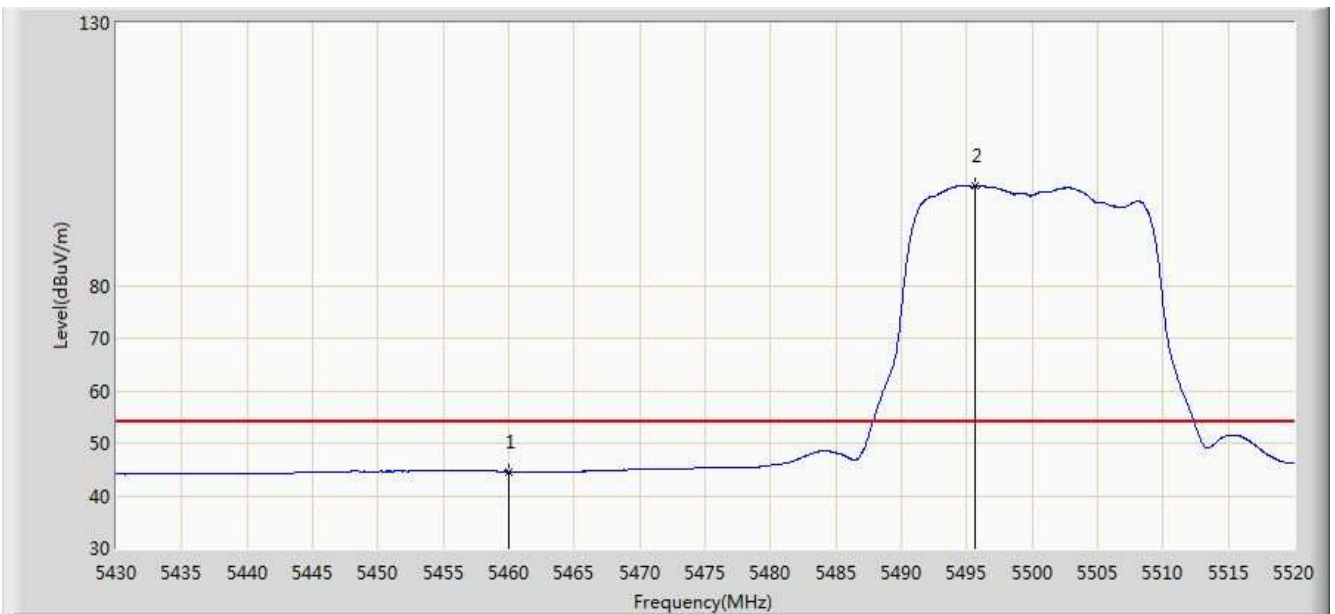


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.587	40.407	-9.413	54.000	4.180	AV
2		*	5495.610	98.889	94.628	N/A	N/A	4.261	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

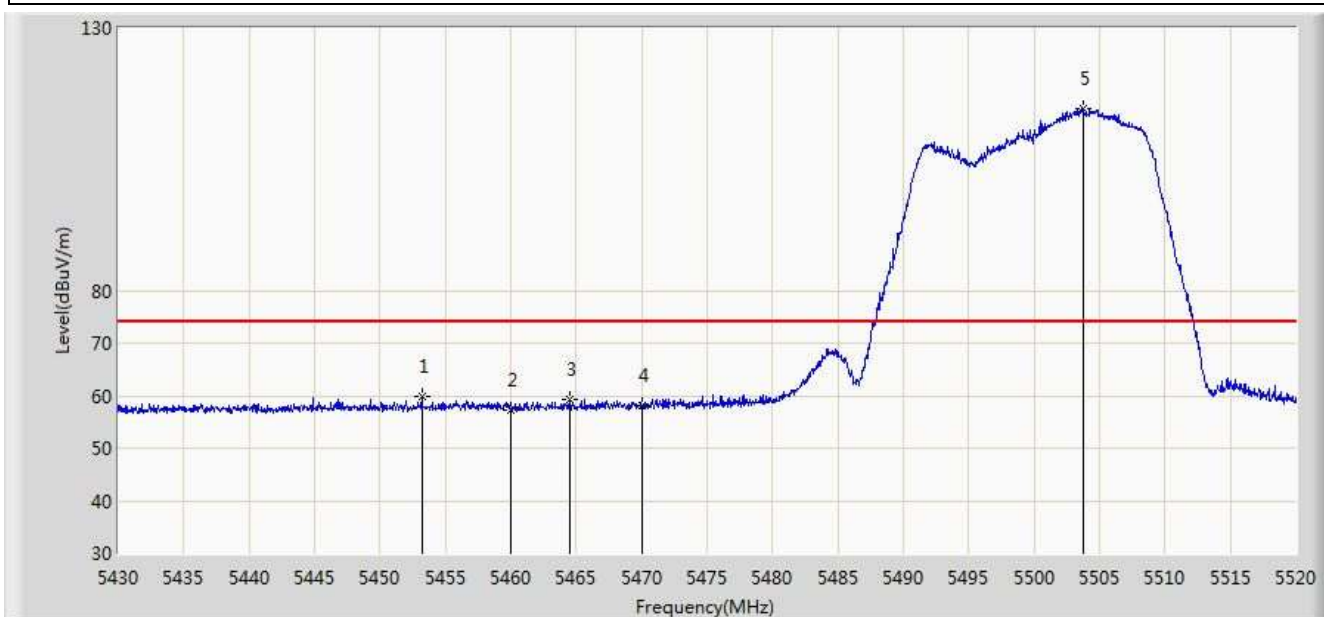


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.220	59.919	55.754	-14.081	74.000	4.164	PK
2			5460.000	57.316	53.136	-16.684	74.000	4.180	PK
3			5464.515	59.170	54.980	-14.830	74.000	4.191	PK
4			5470.000	57.978	53.776	-16.022	74.000	4.202	PK
5		*	5503.755	114.696	110.413	N/A	N/A	4.283	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

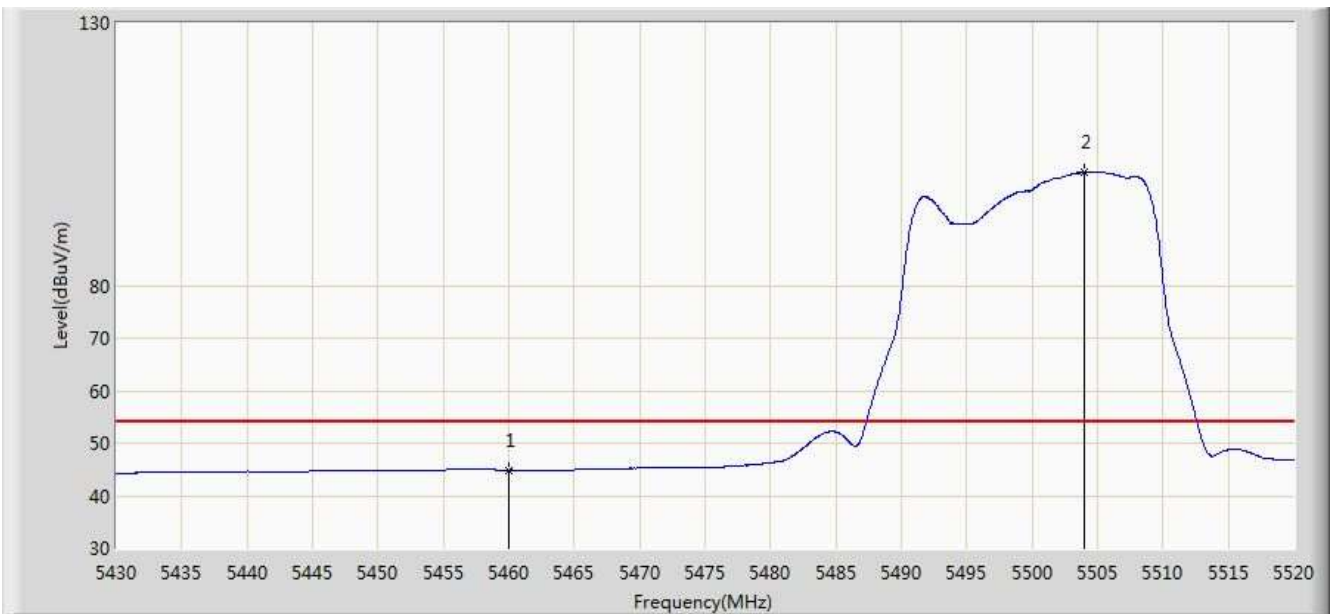


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.910	40.730	-9.090	54.000	4.180	AV
2		*	5504.025	101.585	97.301	N/A	N/A	4.284	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

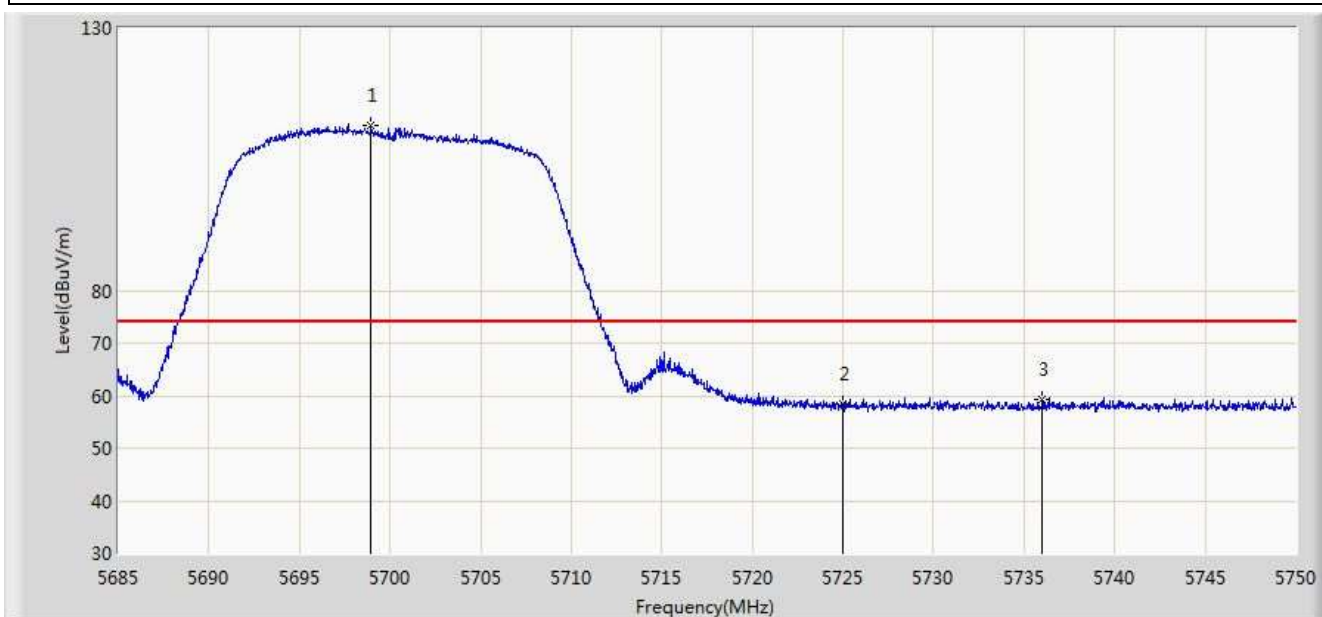


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.942	111.576	106.703	N/A	N/A	4.872	PK
2			5725.000	58.318	53.289	-15.682	74.000	5.029	PK
3			5735.993	59.360	54.261	-14.640	74.000	5.099	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

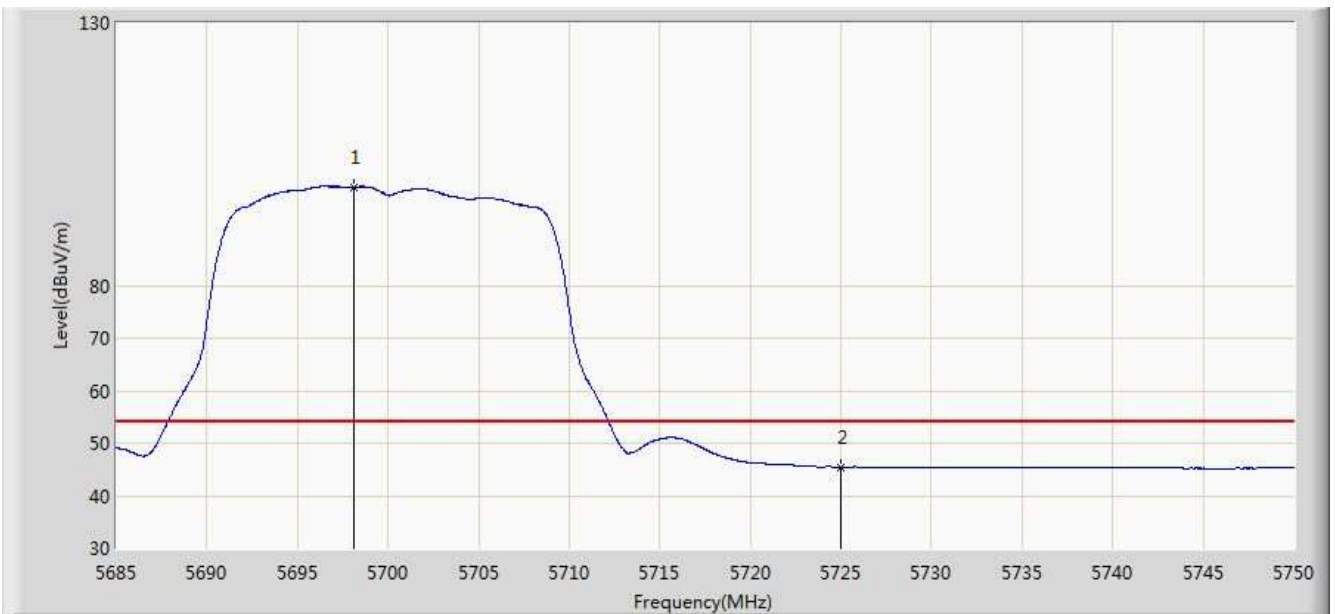


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.130	98.791	93.923	N/A	N/A	4.868	AV
2			5725.000	45.476	40.447	-8.524	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

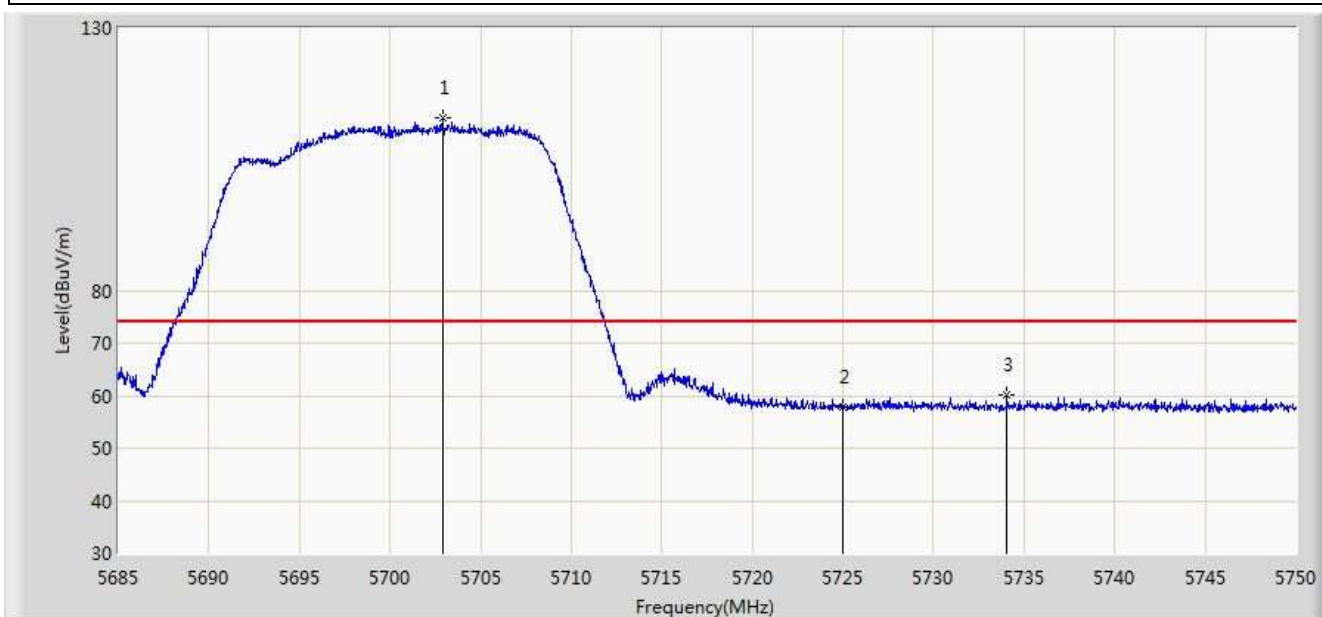


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.908	112.992	108.098	N/A	N/A	4.893	PK
2			5725.000	57.734	52.705	-16.266	74.000	5.029	PK
3			5734.075	60.094	55.007	-13.906	74.000	5.086	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

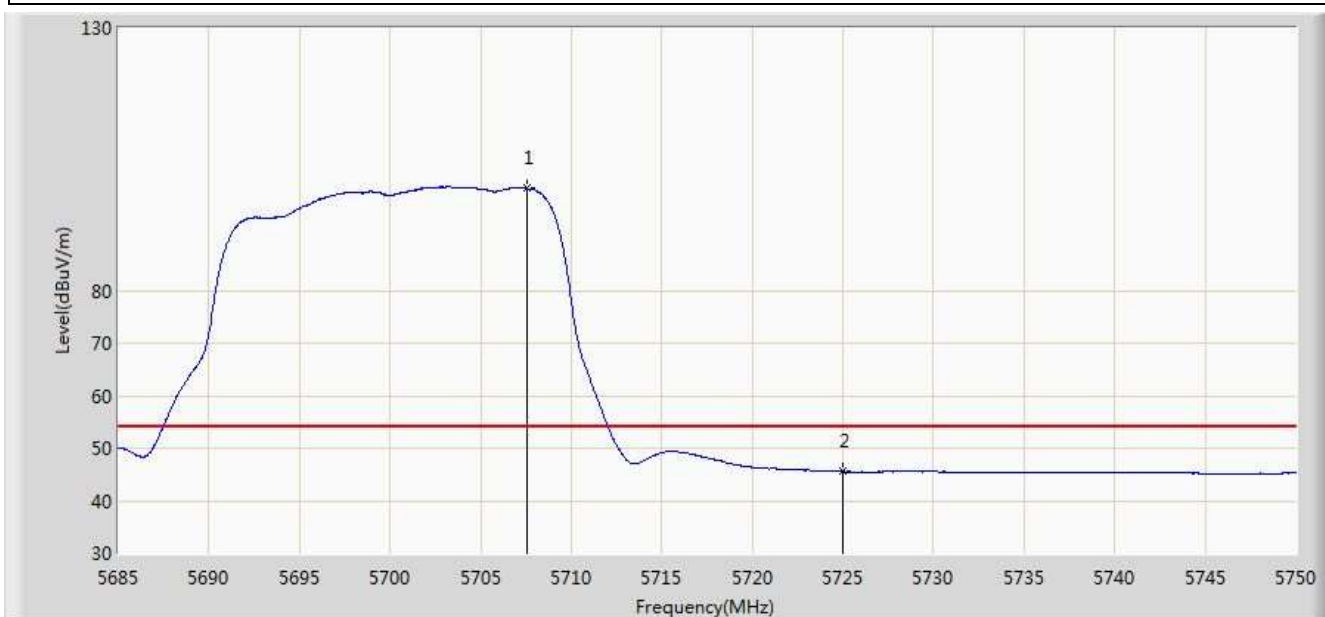


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5707.555	99.422	94.504	N/A	N/A	4.918	AV
2			5725.000	45.518	40.489	-8.482	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 17:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

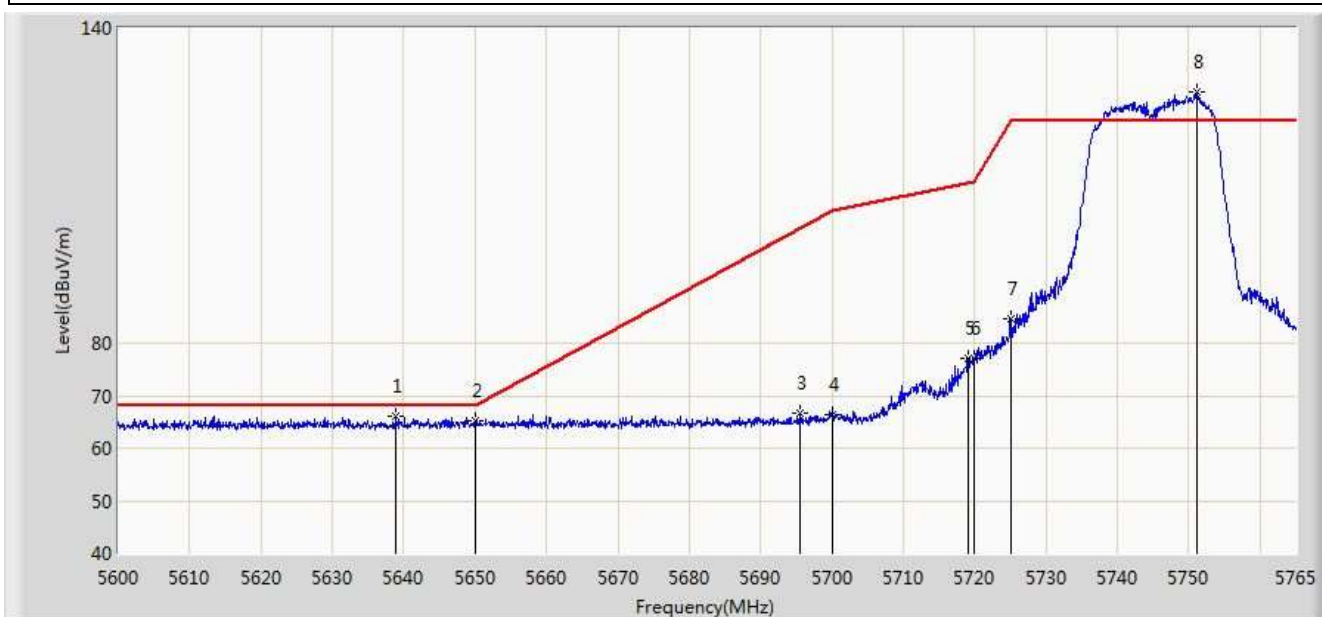


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5638.857	65.986	61.351	-2.214	68.200	4.635	PK
2			5650.000	65.088	60.417	-3.112	68.200	4.671	PK
3			5695.453	66.557	61.703	-35.292	101.849	4.854	PK
4			5700.000	66.491	61.613	-38.709	105.200	4.878	PK
5			5719.047	77.030	72.039	-33.504	110.534	4.990	PK
6			5720.000	77.004	72.007	-33.796	110.800	4.997	PK
7			5725.000	84.583	79.554	-37.617	122.200	5.029	PK
8		*	5751.223	127.825	122.635	N/A	N/A	5.191	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 18:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

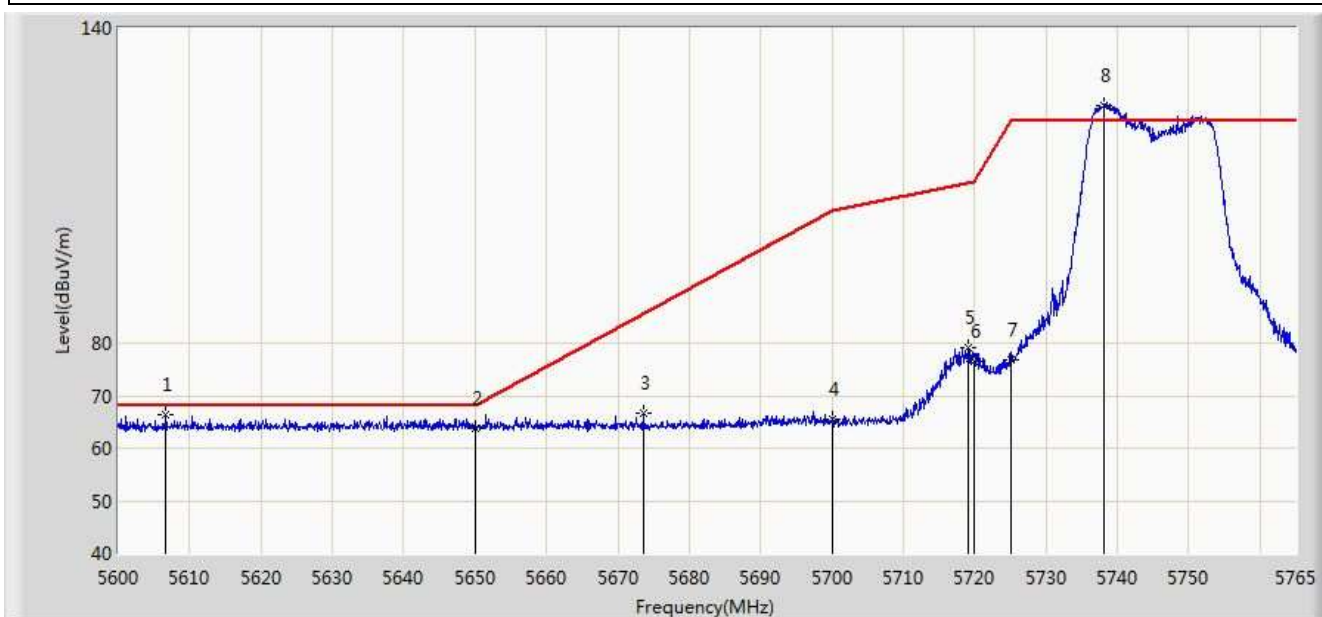


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5606.600	66.389	61.847	-1.811	68.200	4.542	PK
2			5650.000	63.911	59.240	-4.289	68.200	4.671	PK
3			5673.590	66.657	61.896	-19.040	85.697	4.762	PK
4			5700.000	65.425	60.547	-39.775	105.200	4.878	PK
5			5719.130	79.116	74.125	-31.441	110.557	4.992	PK
6			5720.000	76.451	71.454	-34.349	110.800	4.997	PK
7			5725.000	76.692	71.663	-45.508	122.200	5.029	PK
8		*	5738.187	125.311	120.198	N/A	N/A	5.113	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 18:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

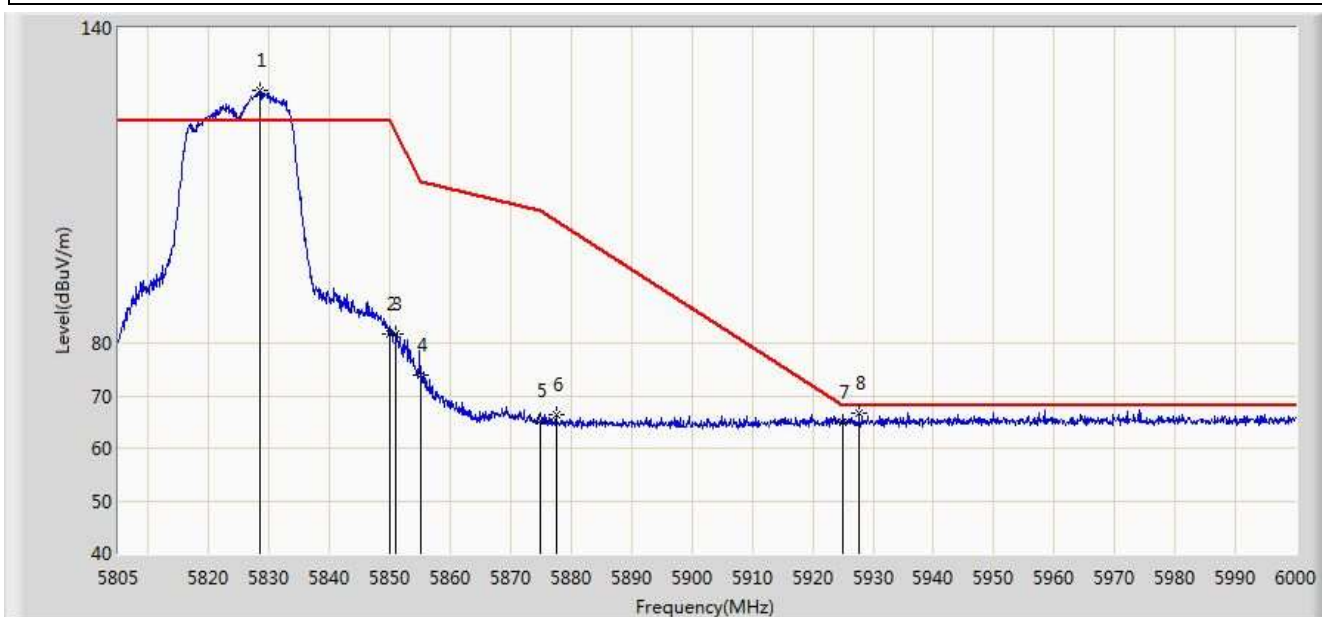


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.498	128.165	122.557	N/A	N/A	5.609	PK
2			5850.000	81.706	75.980	-40.494	122.200	5.726	PK
3			5851.020	81.866	76.136	-38.008	119.874	5.730	PK
4			5855.000	74.046	68.300	-36.754	110.800	5.746	PK
5			5875.000	65.084	59.264	-40.116	105.200	5.820	PK
6			5877.540	66.456	60.627	-36.857	103.313	5.829	PK
7			5925.000	64.821	58.855	-3.379	68.200	5.967	PK
8			5927.655	66.665	60.692	-1.535	68.200	5.974	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 18:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

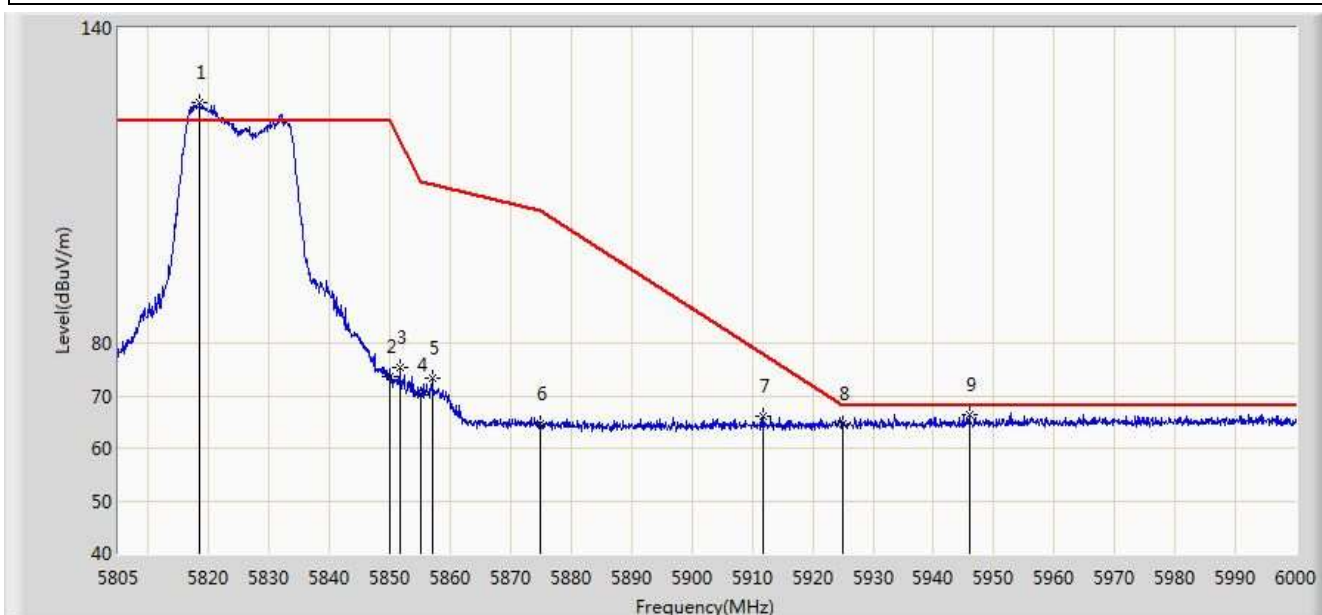


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.553	125.847	120.297	N/A	N/A	5.551	PK
2			5850.000	73.672	67.946	-48.528	122.200	5.726	PK
3			5851.605	75.313	69.581	-43.226	118.540	5.732	PK
4			5855.000	70.275	64.529	-40.525	110.800	5.746	PK
5			5856.967	73.427	67.673	-36.821	110.248	5.754	PK
6			5875.000	64.763	58.943	-40.437	105.200	5.820	PK
7			5911.860	66.073	60.139	-11.820	77.893	5.935	PK
8			5925.000	64.758	58.792	-3.442	68.200	5.967	PK
9			5945.888	66.516	60.498	-1.684	68.200	6.018	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 19:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

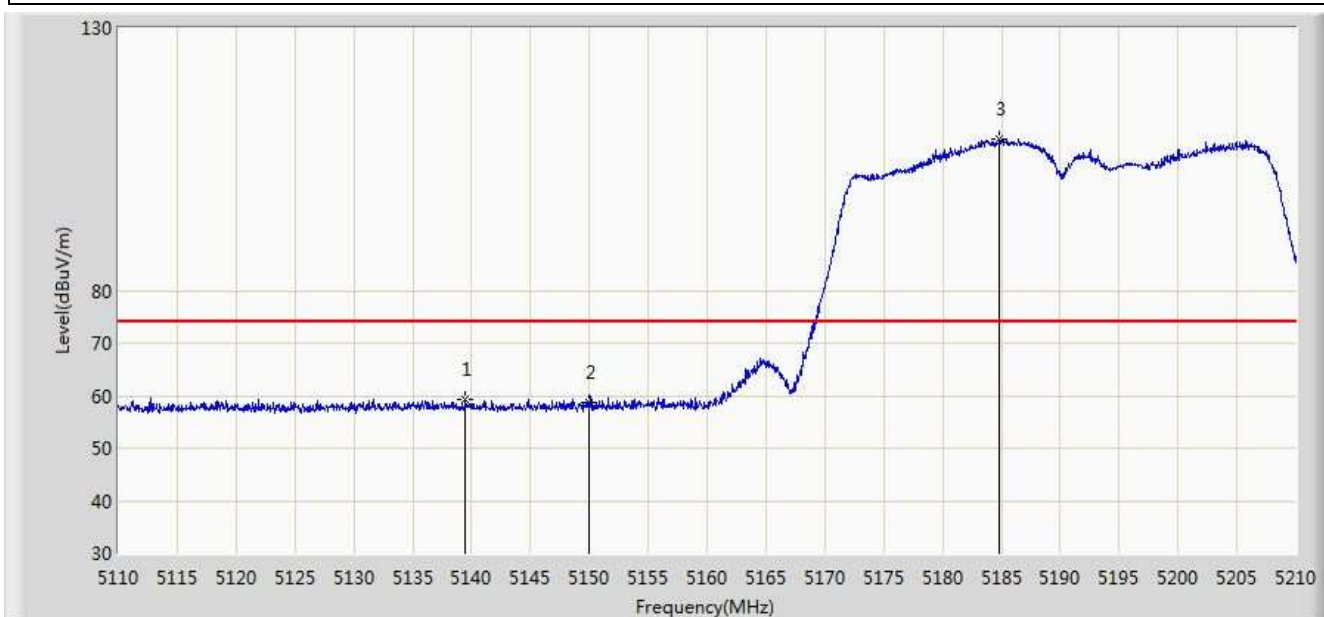


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.500	59.414	55.239	-14.586	74.000	4.176	PK
2			5150.000	58.673	54.504	-15.327	74.000	4.170	PK
3		*	5184.800	108.879	104.827	N/A	N/A	4.052	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 19:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

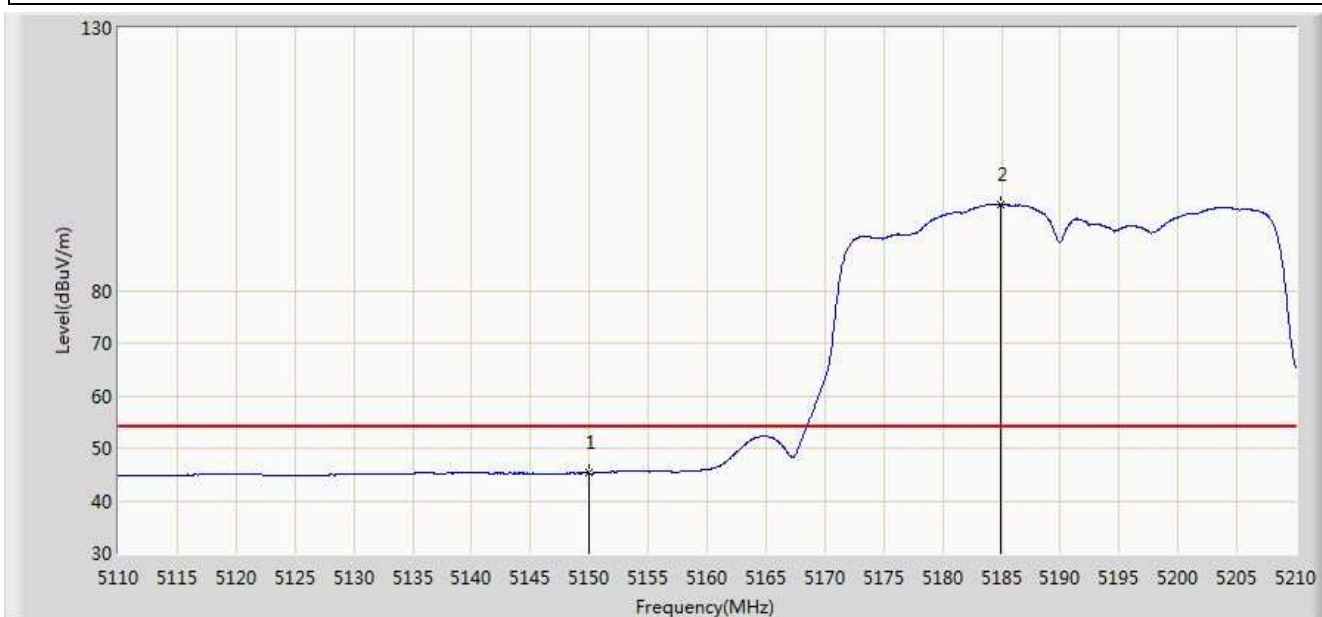


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.234	41.065	-8.766	54.000	4.170	AV
2		*	5184.900	96.388	92.336	N/A	N/A	4.052	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 19:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

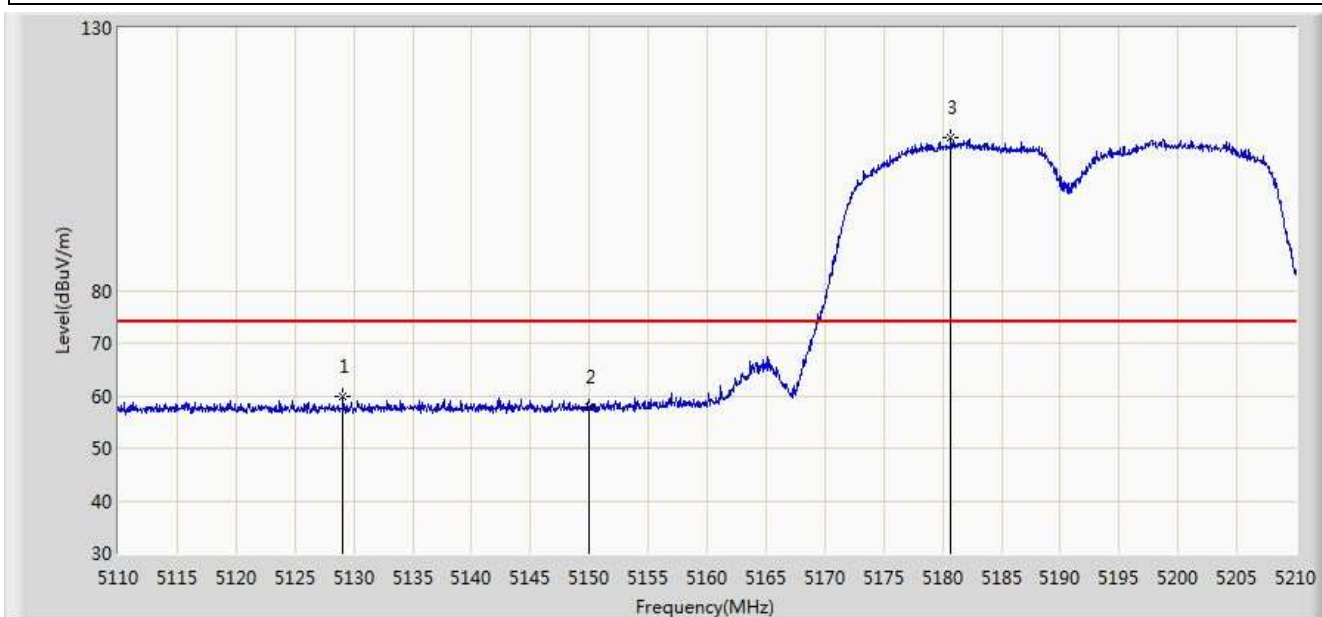


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.100	59.868	55.693	-14.132	74.000	4.175	PK
2			5150.000	57.852	53.683	-16.148	74.000	4.170	PK
3		*	5180.700	109.204	105.138	N/A	N/A	4.066	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 19:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

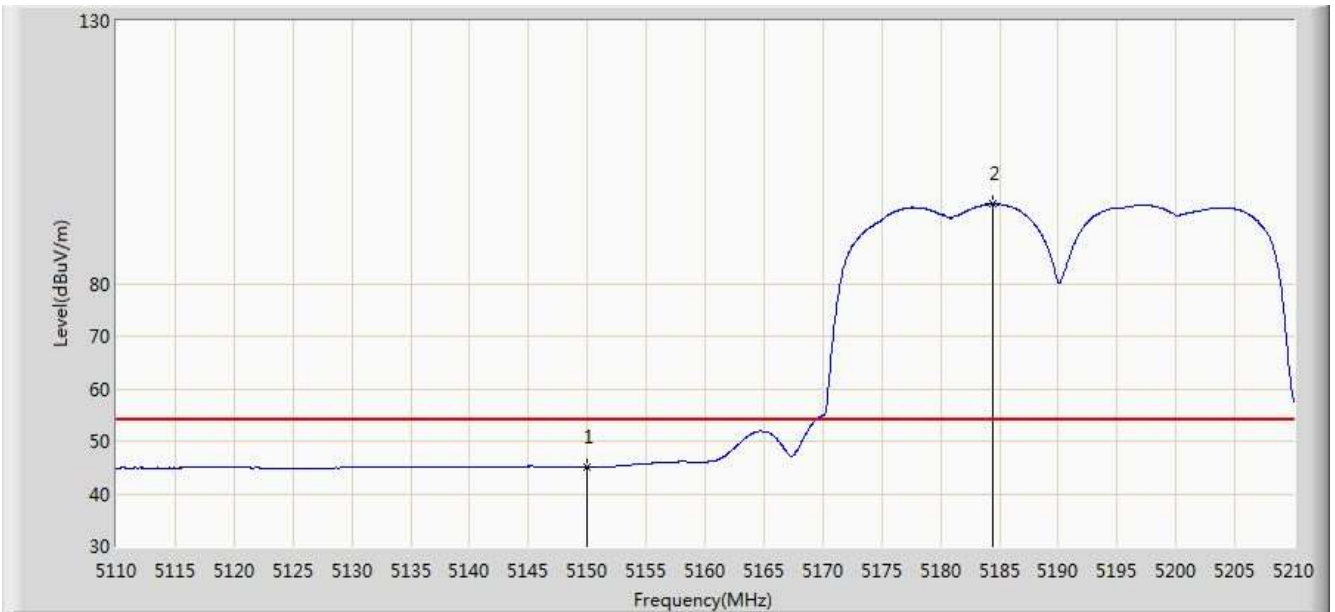


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.080	40.911	-8.920	54.000	4.170	AV
2		*	5184.450	95.151	91.098	N/A	N/A	4.053	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

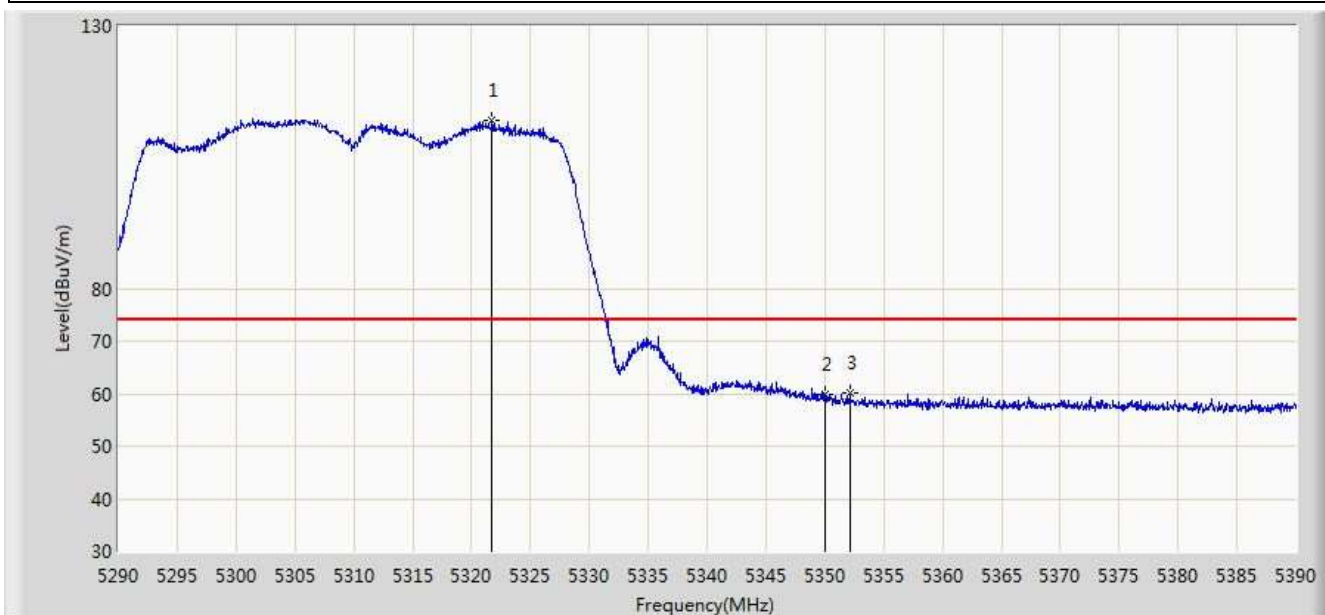


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.700	111.979	108.127	N/A	N/A	3.852	PK
2			5350.000	59.811	55.906	-14.189	74.000	3.904	PK
3			5352.150	60.110	56.201	-13.890	74.000	3.908	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

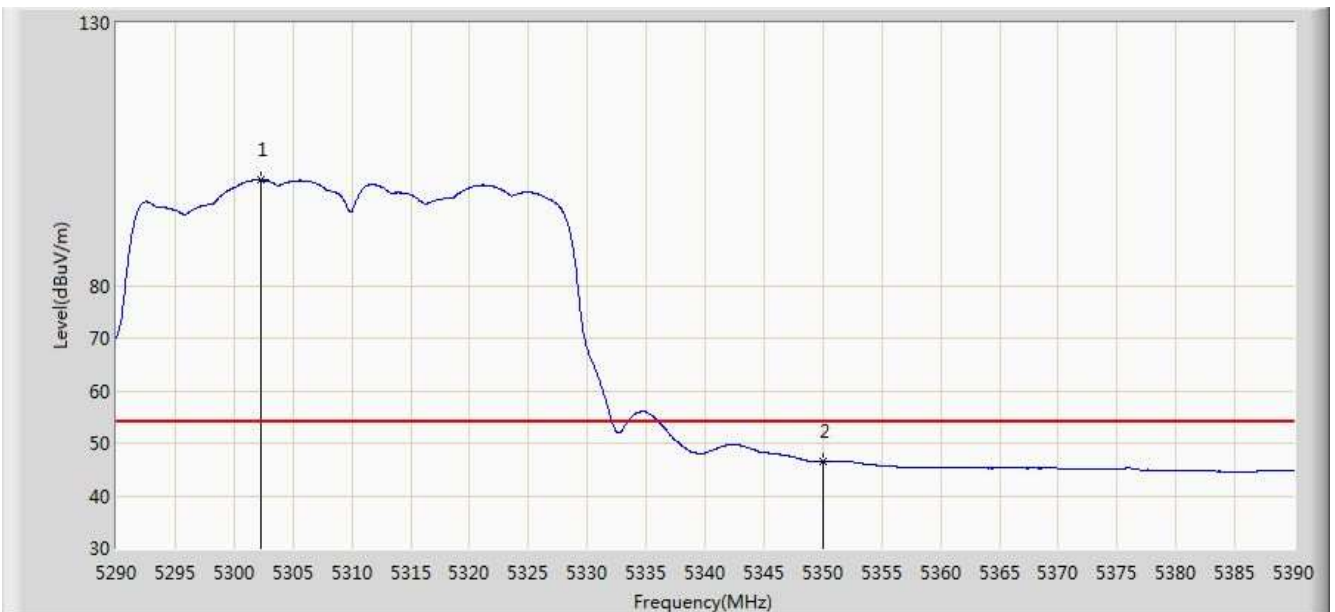


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.250	100.065	96.250	N/A	N/A	3.815	AV
2			5350.000	46.509	42.604	-7.491	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

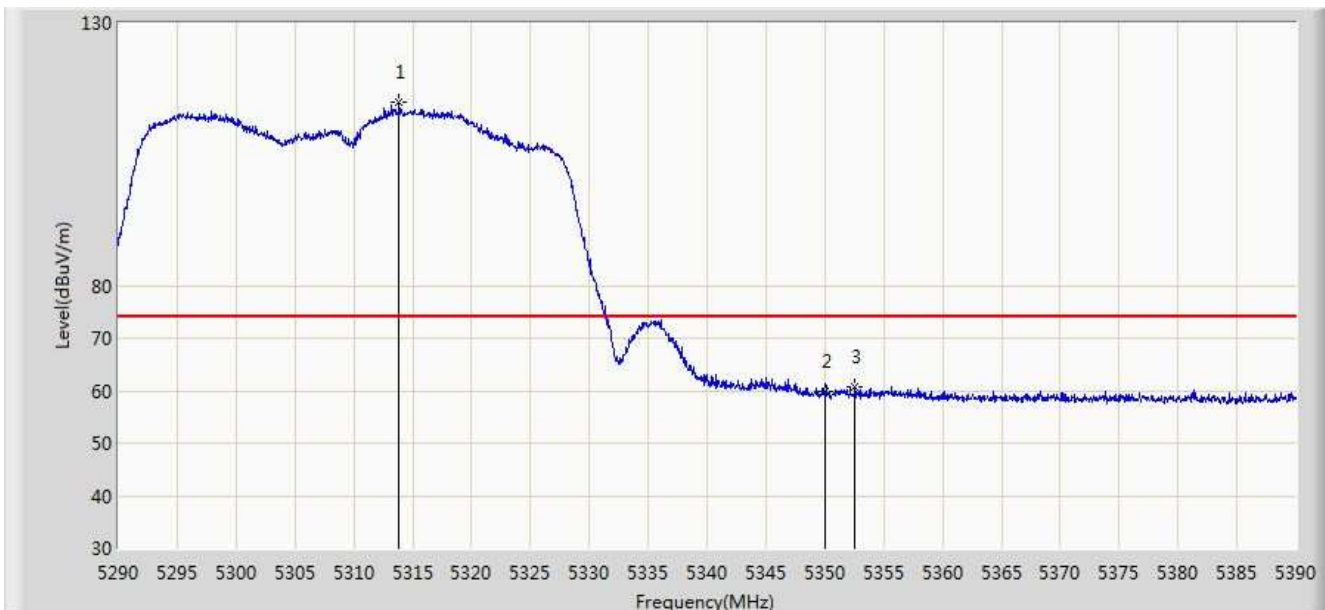


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.850	114.815	110.978	N/A	N/A	3.837	PK
2			5350.000	59.731	55.826	-14.269	74.000	3.904	PK
3			5352.550	60.768	56.859	-13.232	74.000	3.909	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

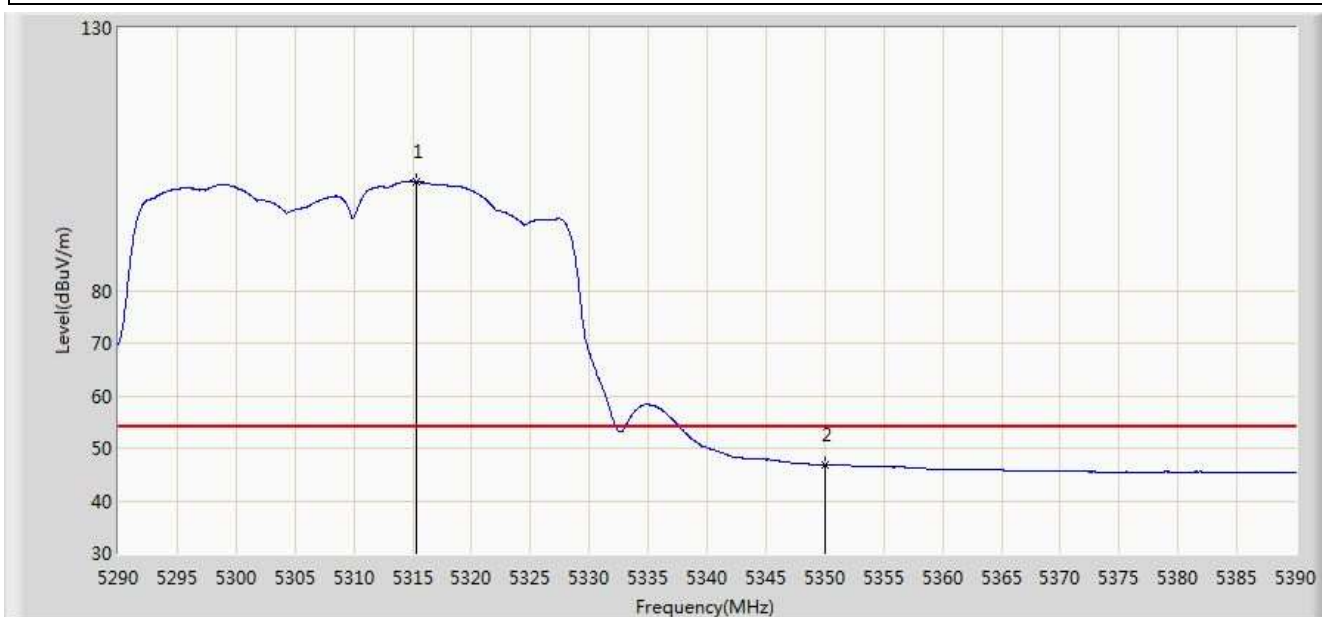


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.300	100.744	96.904	N/A	N/A	3.840	AV
2			5350.000	46.778	42.873	-7.222	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

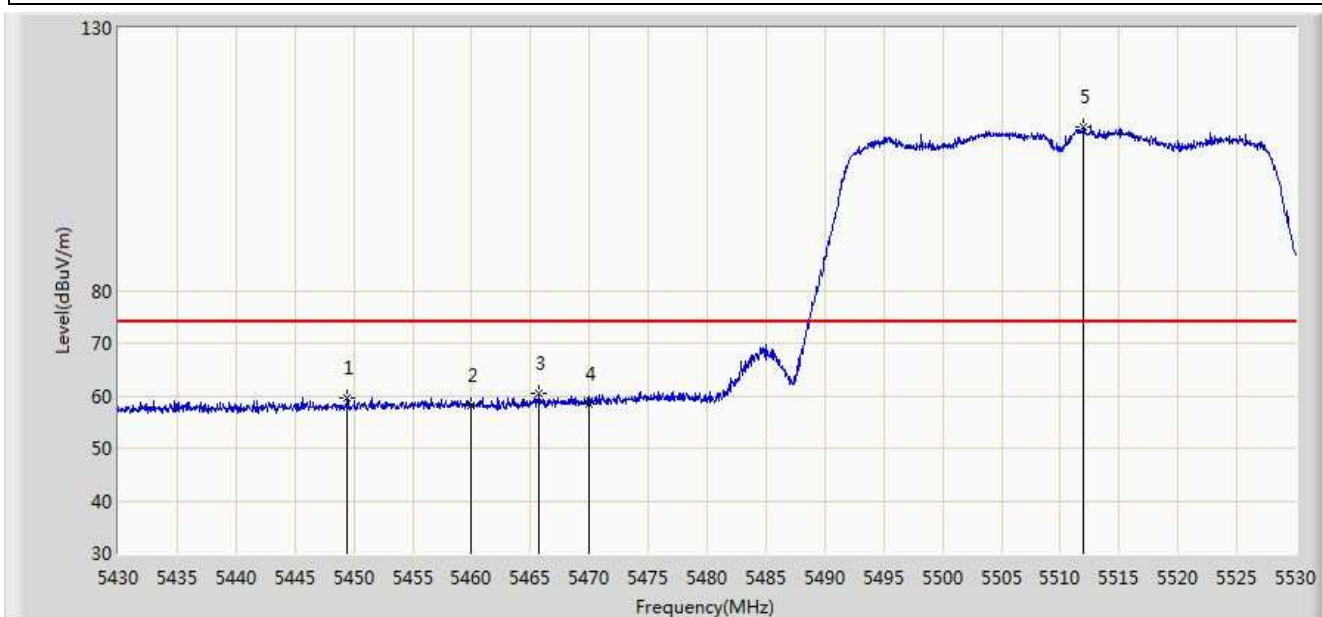

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.450	59.666	55.513	-14.334	74.000	4.153	PK
2			5460.000	58.052	53.872	-15.948	74.000	4.180	PK
3			5465.750	60.345	56.152	-13.655	74.000	4.193	PK
4			5470.000	58.327	54.125	-15.673	74.000	4.202	PK
5		*	5512.000	111.263	106.956	N/A	N/A	4.307	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.629	41.449	-8.371	54.000	4.180	AV
2		*	5504.800	98.493	94.207	N/A	N/A	4.286	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

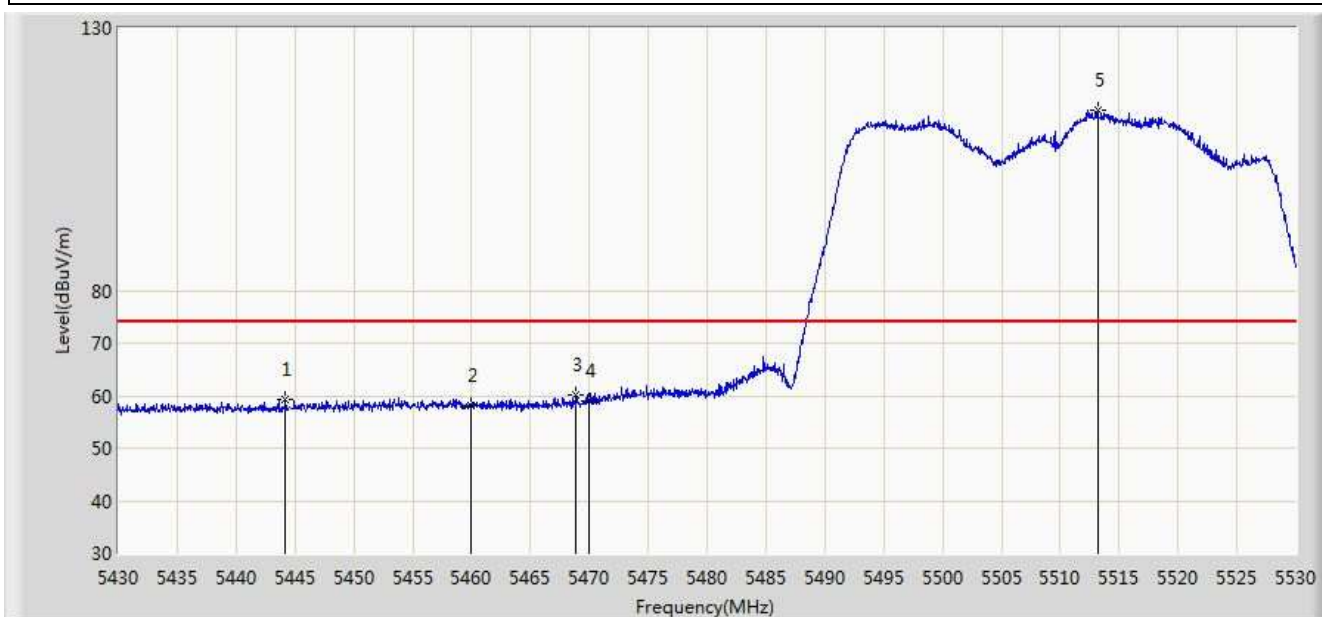


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5444.200	59.266	55.129	-14.734	74.000	4.137	PK
2			5460.000	58.030	53.850	-15.970	74.000	4.180	PK
3			5468.850	60.253	56.053	-13.747	74.000	4.200	PK
4			5470.000	58.934	54.732	-15.066	74.000	4.202	PK
5		*	5513.150	114.443	110.133	N/A	N/A	4.310	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

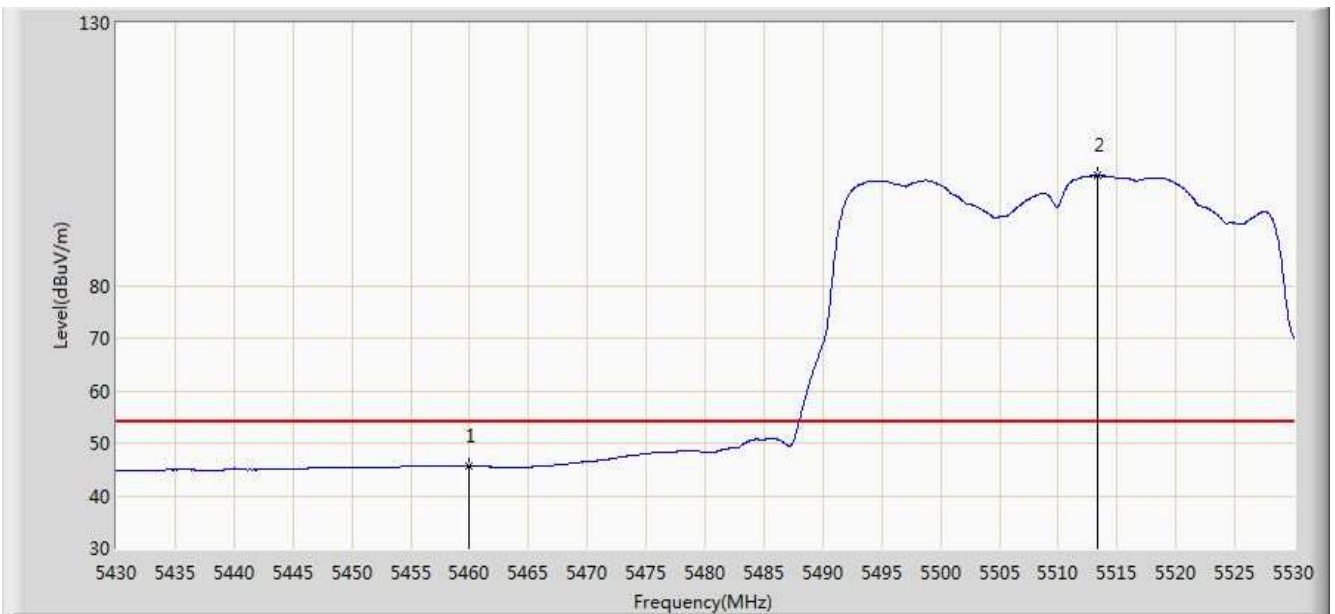


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.702	41.522	-8.298	54.000	4.180	AV
2		*	5513.300	100.880	96.569	N/A	N/A	4.310	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

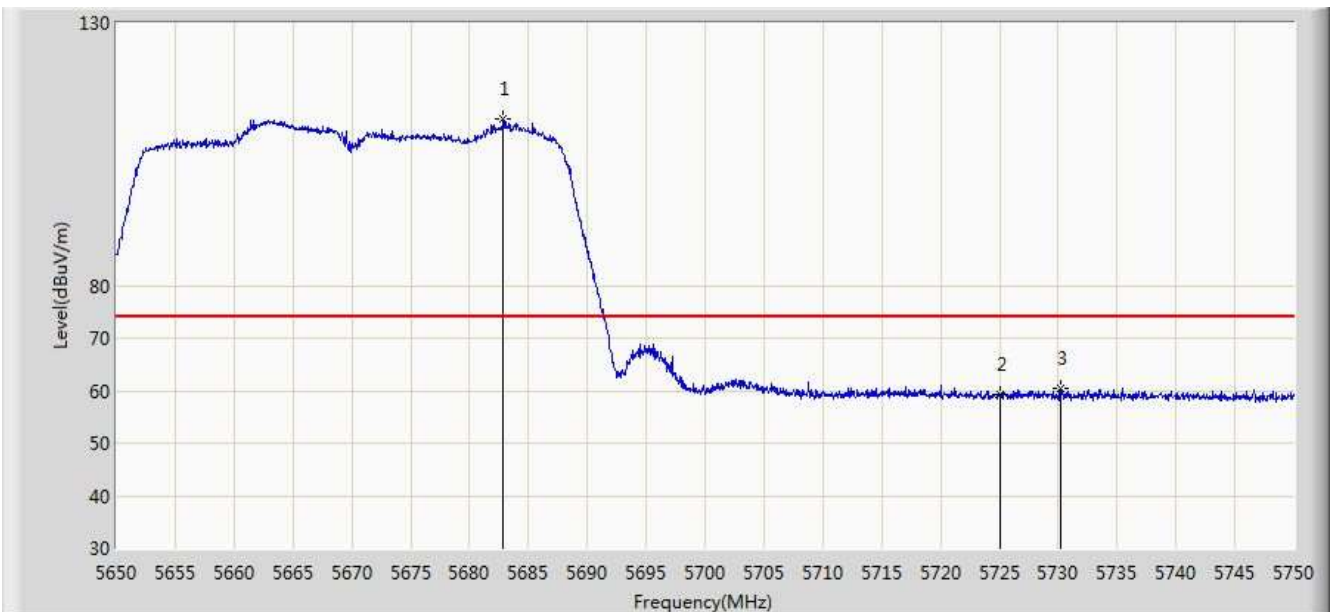


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5682.850	111.655	106.856	N/A	N/A	4.799	PK
2			5725.000	59.176	54.147	-14.824	74.000	5.029	PK
3			5730.150	60.458	55.396	-13.542	74.000	5.062	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

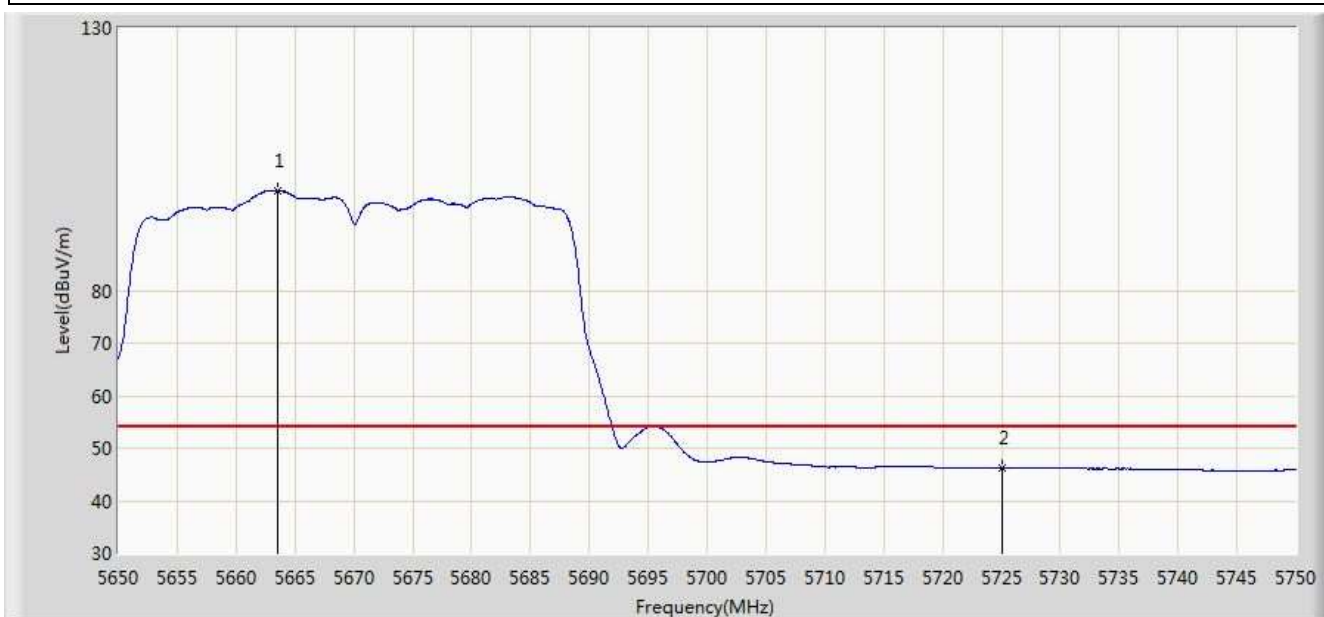


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5663.500	99.015	94.294	N/A	N/A	4.722	AV
2			5725.000	46.133	41.104	-7.867	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

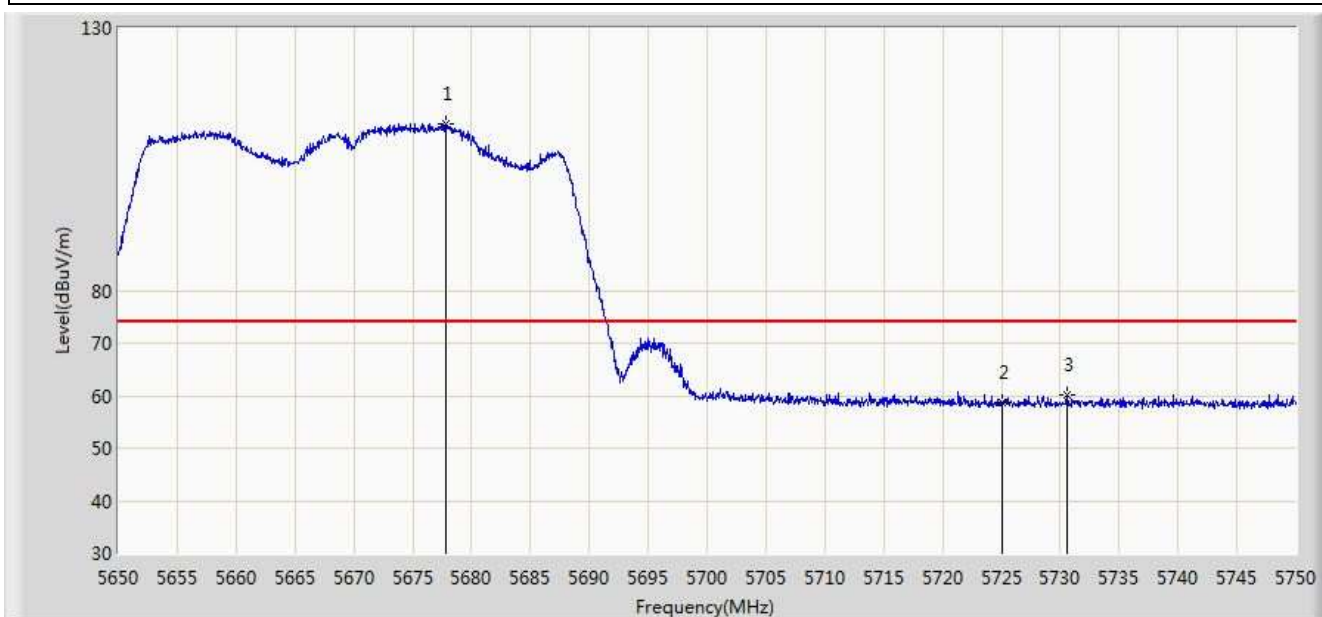


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5677.800	111.595	106.817	N/A	N/A	4.777	PK
2			5725.000	58.719	53.690	-15.281	74.000	5.029	PK
3			5730.550	60.011	54.947	-13.989	74.000	5.064	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 20:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

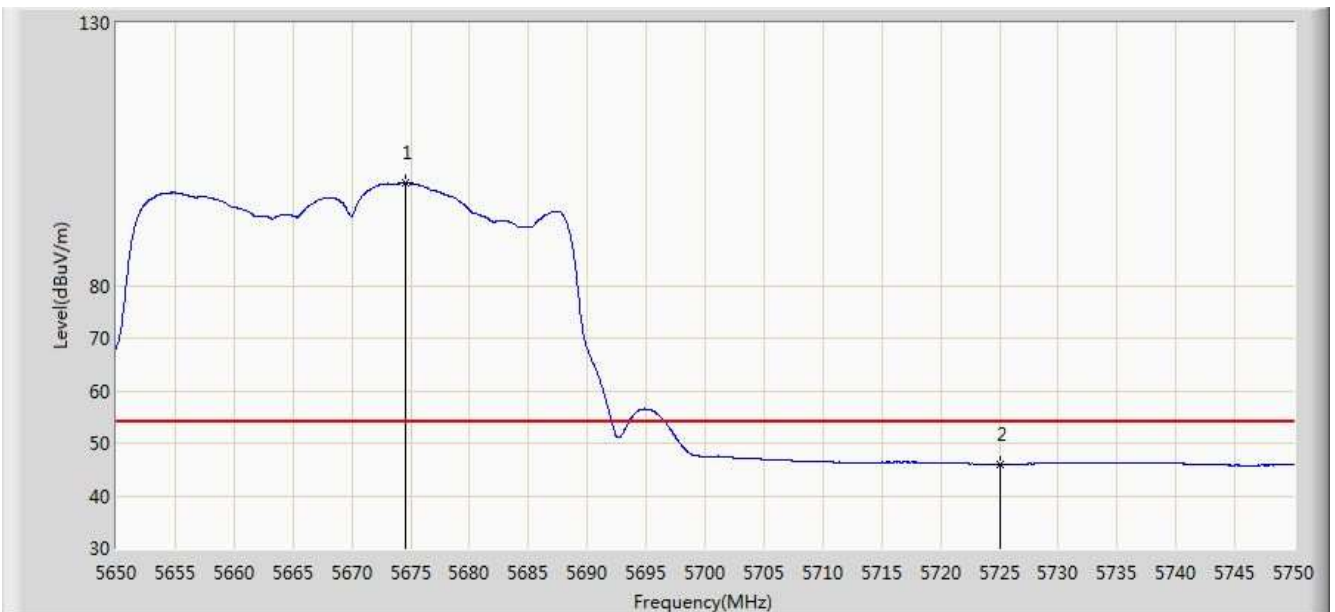


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5674.500	99.443	94.678	N/A	N/A	4.765	AV
2			5725.000	45.979	40.950	-8.021	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 19:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

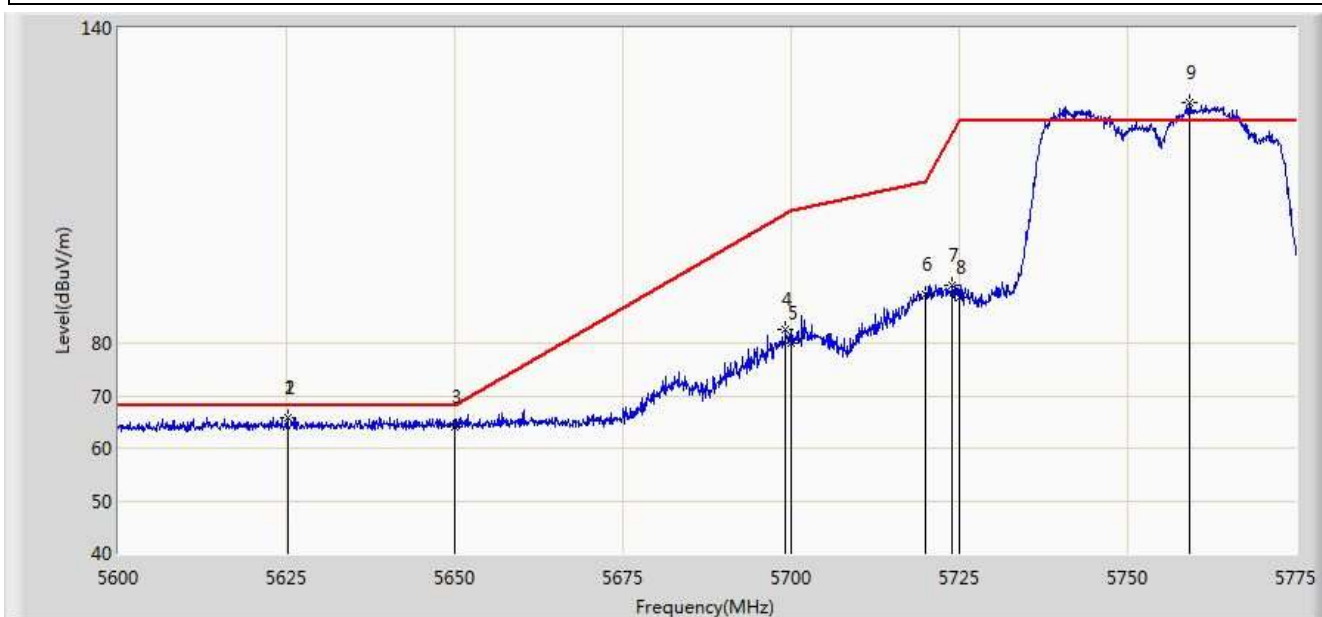


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5625.200	65.867	61.272	-2.333	68.200	4.595	PK
2			5625.200	65.867	61.272	-2.333	68.200	4.595	PK
3			5650.000	64.142	59.471	-4.058	68.200	4.671	PK
4			5699.138	82.514	77.640	-22.051	104.565	4.874	PK
5			5700.000	79.912	75.034	-25.288	105.200	4.878	PK
6			5720.000	89.297	84.300	-21.503	110.800	4.997	PK
7			5723.900	91.138	86.116	-28.555	119.693	5.022	PK
8			5725.000	88.750	83.721	-33.450	122.200	5.029	PK
9		*	5759.250	125.902	120.666	N/A	N/A	5.236	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 20:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

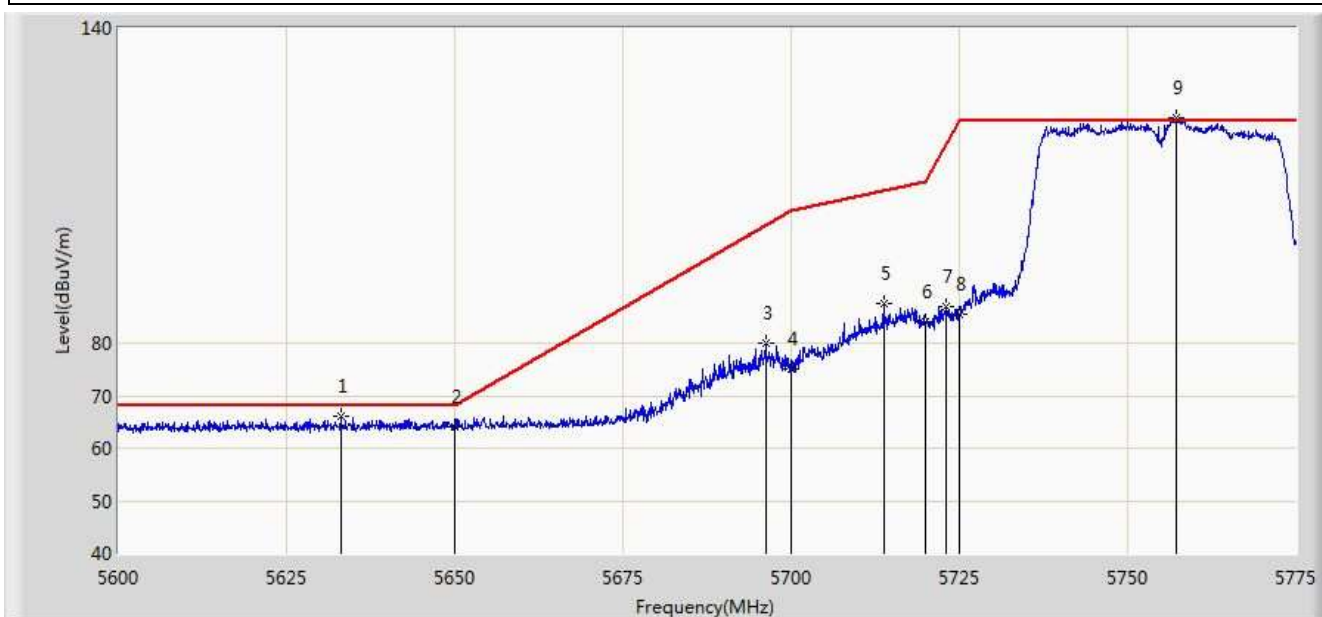


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5633.075	65.982	61.364	-2.218	68.200	4.618	PK
2			5650.000	64.121	59.450	-4.079	68.200	4.671	PK
3			5696.163	79.993	75.135	-22.379	102.372	4.859	PK
4			5700.000	75.155	70.277	-30.045	105.200	4.878	PK
5			5713.750	87.410	82.453	-21.642	109.052	4.956	PK
6			5720.000	84.163	79.166	-26.637	110.800	4.997	PK
7			5723.112	86.848	81.831	-31.049	117.897	5.017	PK
8			5725.000	85.515	80.486	-36.685	122.200	5.029	PK
9		*	5757.150	122.815	117.591	N/A	N/A	5.224	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 20:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

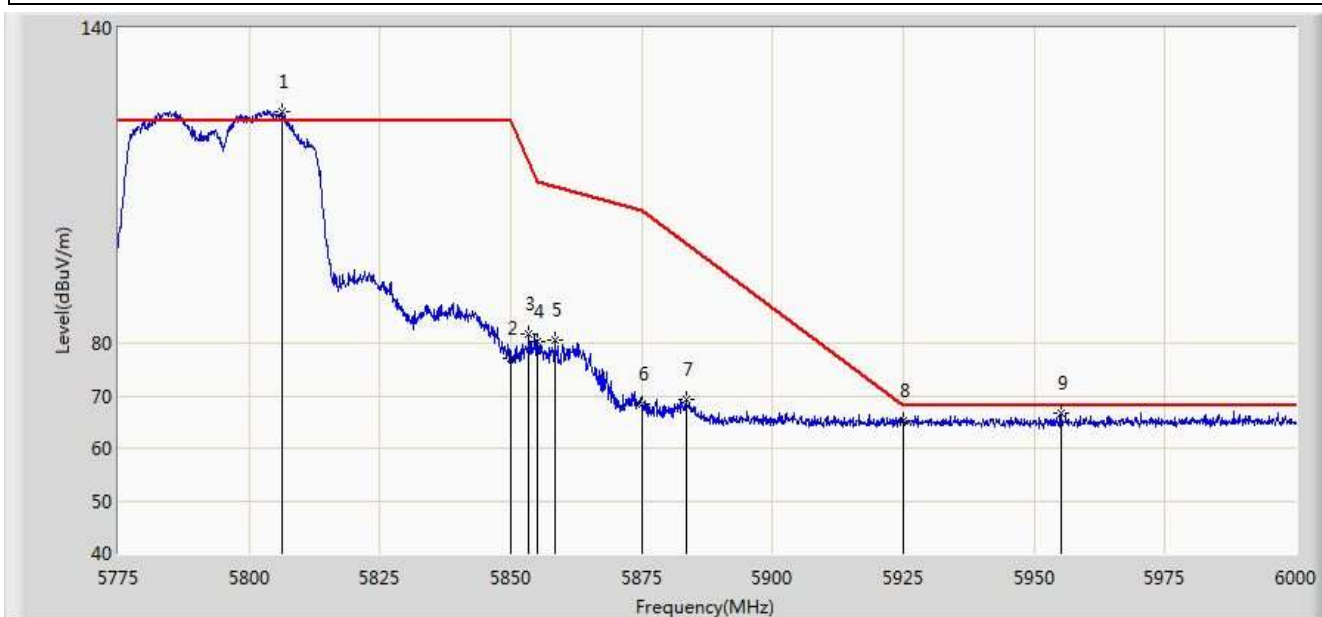


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5806.388	124.026	118.545	N/A	N/A	5.481	PK
2			5850.000	76.959	71.233	-45.241	122.200	5.726	PK
3			5853.413	81.721	75.981	-32.697	114.417	5.739	PK
4			5855.000	80.225	74.479	-30.575	110.800	5.746	PK
5			5858.362	80.681	74.921	-29.176	109.857	5.760	PK
6			5875.000	68.343	62.523	-36.857	105.200	5.820	PK
7			5883.450	69.366	63.517	-29.559	98.925	5.849	PK
8			5925.000	65.251	59.285	-2.949	68.200	5.967	PK
9			5955.112	66.597	60.562	-1.603	68.200	6.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 20:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

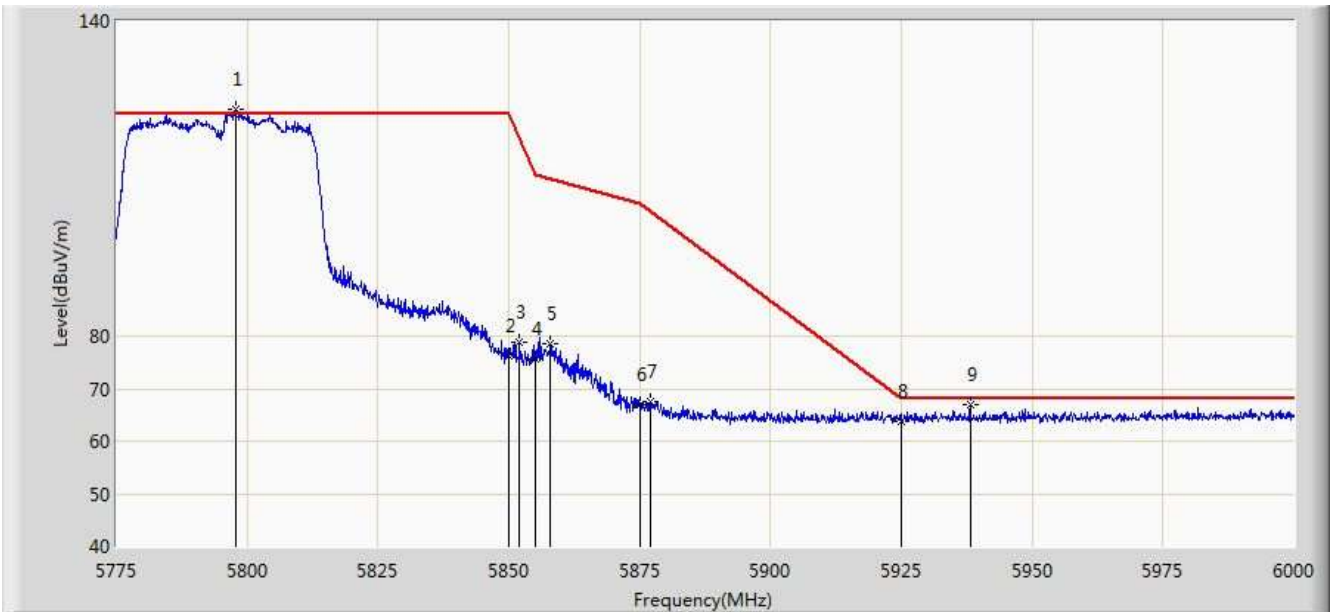


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5797.725	123.270	117.838	N/A	N/A	5.432	PK
2			5850.000	76.279	70.553	-45.921	122.200	5.726	PK
3			5852.062	78.924	73.190	-38.573	117.497	5.734	PK
4			5855.000	75.776	70.030	-35.024	110.800	5.746	PK
5			5858.025	78.441	72.682	-31.511	109.952	5.759	PK
6			5875.000	66.966	61.146	-38.234	105.200	5.820	PK
7			5877.038	67.648	61.821	-36.038	103.686	5.827	PK
8			5925.000	63.812	57.846	-4.388	68.200	5.967	PK
9			5938.125	66.836	60.837	-1.364	68.200	5.998	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 20:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

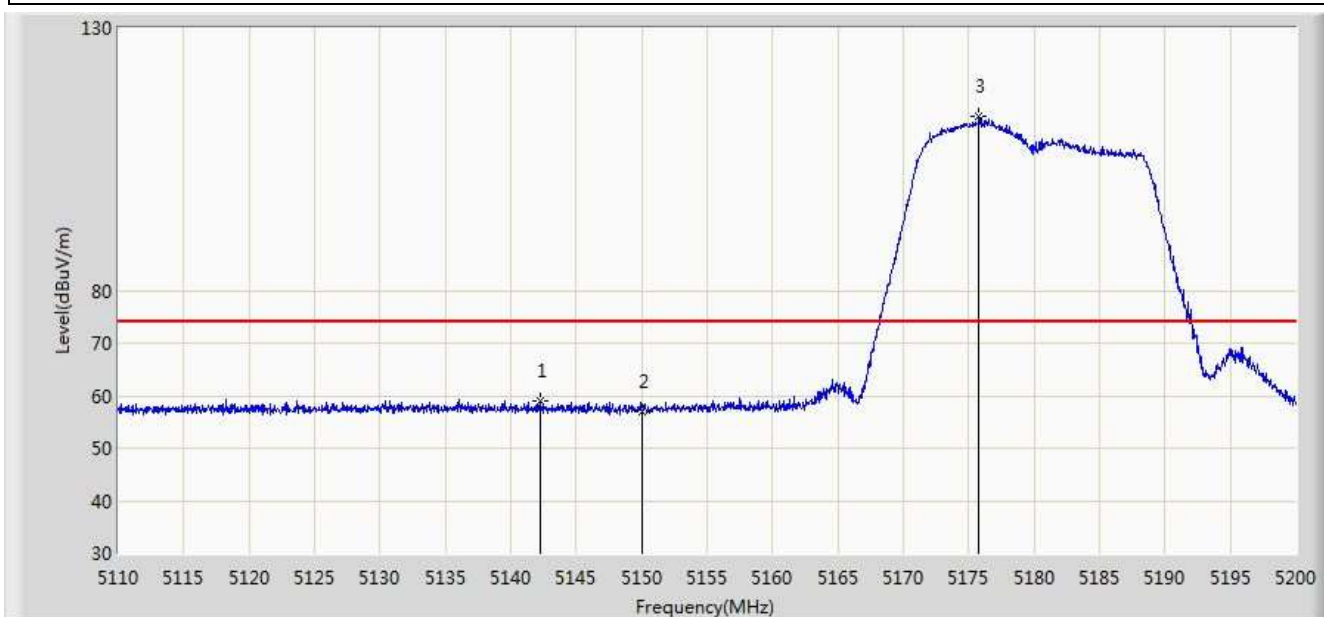


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.220	59.121	54.945	-14.879	74.000	4.175	PK
2			5150.000	56.988	52.819	-17.012	74.000	4.170	PK
3		*	5175.790	113.192	109.108	N/A	N/A	4.084	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 20:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

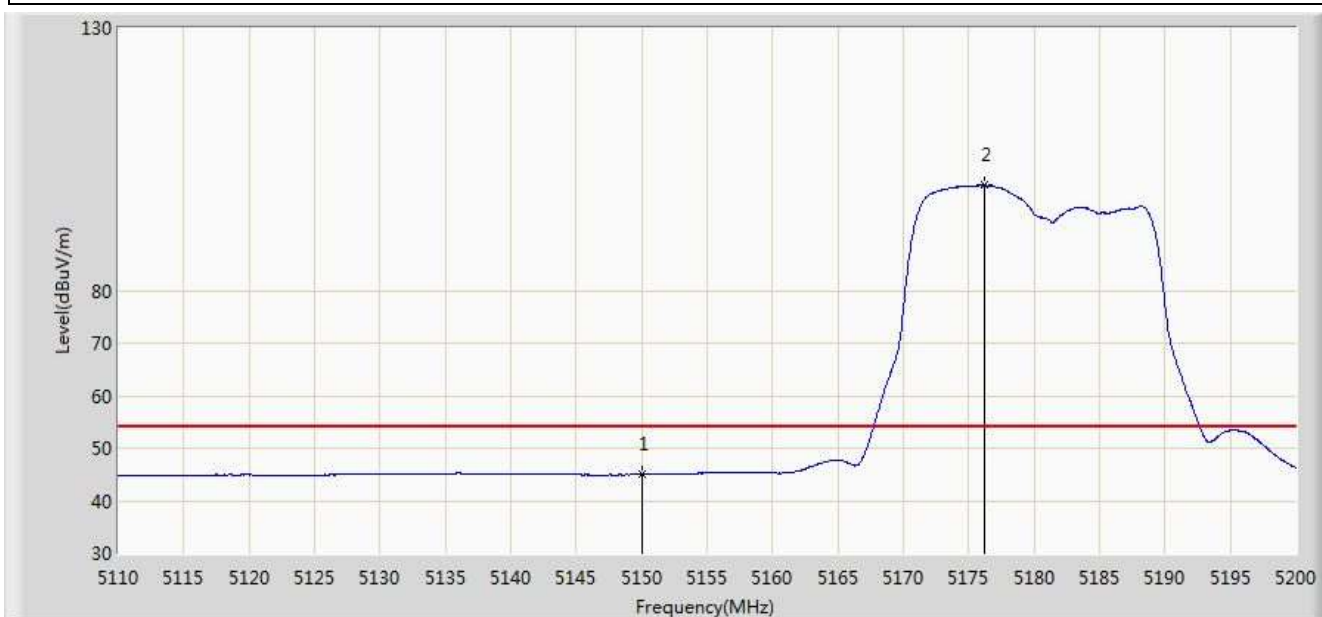


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.992	40.823	-9.008	54.000	4.170	AV
2		*	5176.240	100.032	95.950	N/A	N/A	4.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 20:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

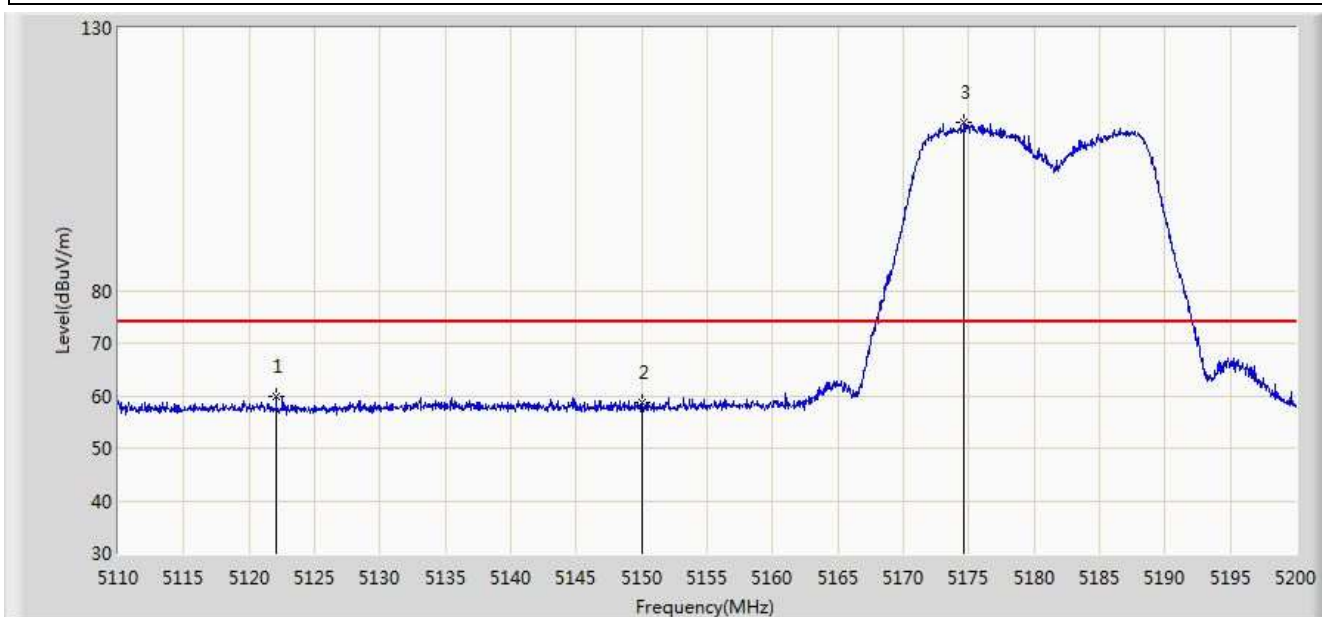


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5122.060	59.737	55.562	-14.263	74.000	4.174	PK
2			5150.000	58.653	54.484	-15.347	74.000	4.170	PK
3		*	5174.665	112.042	107.954	N/A	N/A	4.088	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 20:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

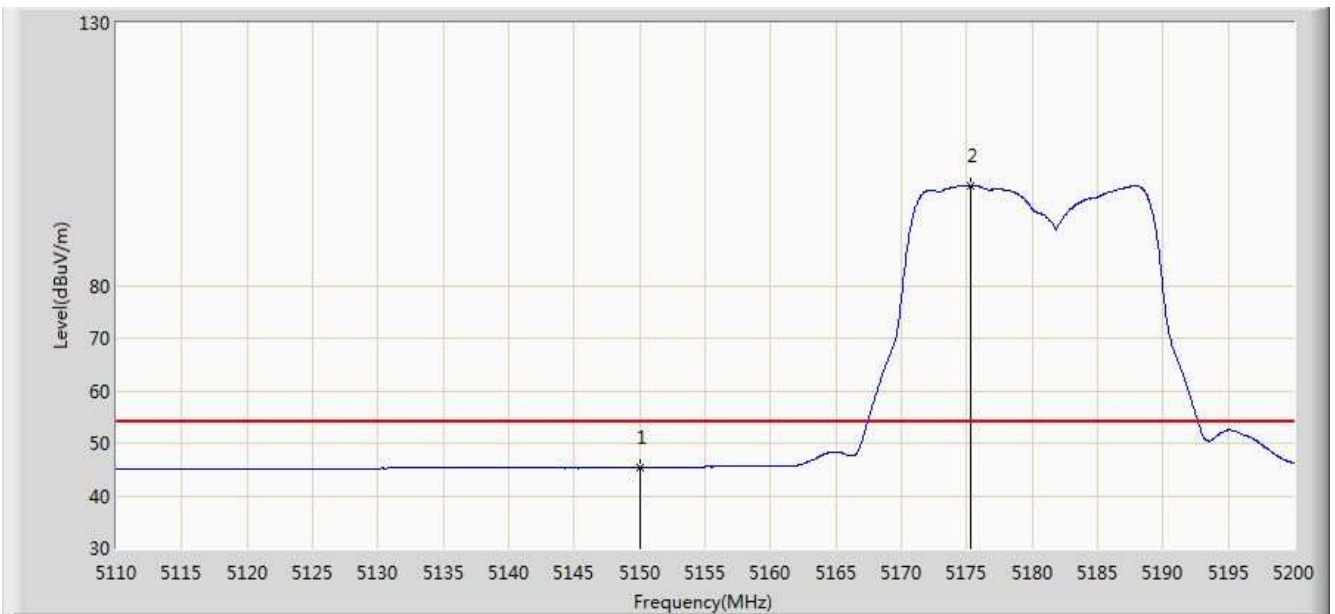


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.269	41.100	-8.731	54.000	4.170	AV
2		*	5175.340	98.938	94.853	N/A	N/A	4.085	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

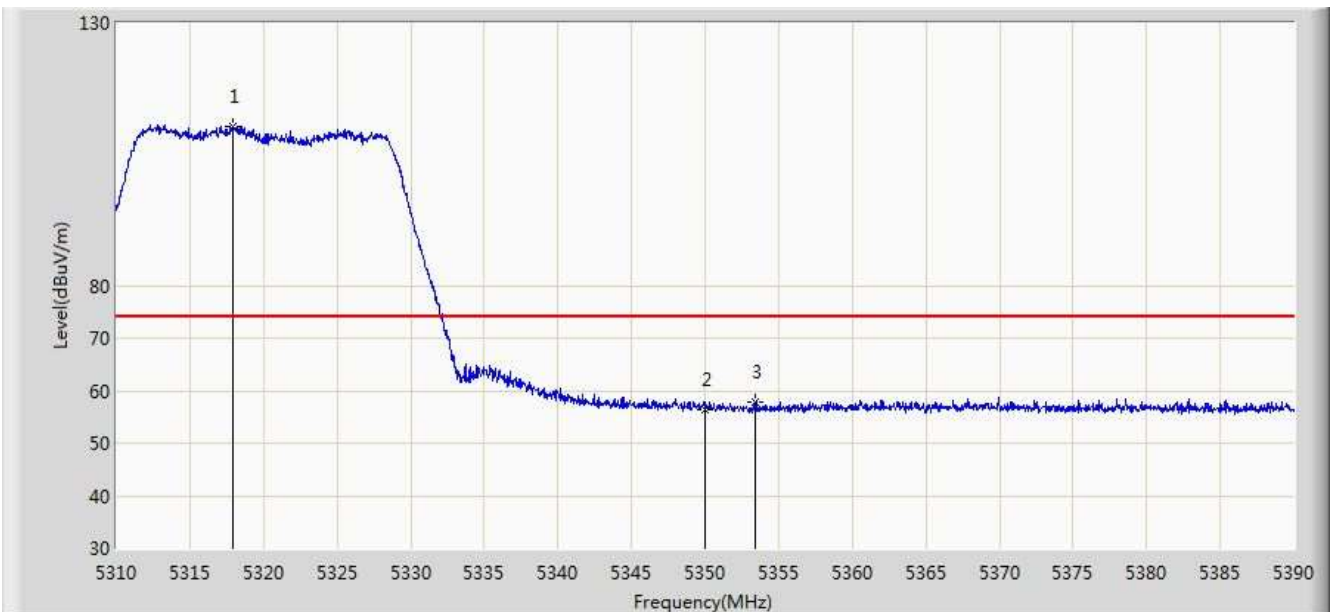


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.960	110.409	106.564	N/A	N/A	3.845	PK
2			5350.000	56.292	52.387	-17.708	74.000	3.904	PK
3			5353.400	57.855	53.944	-16.145	74.000	3.910	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

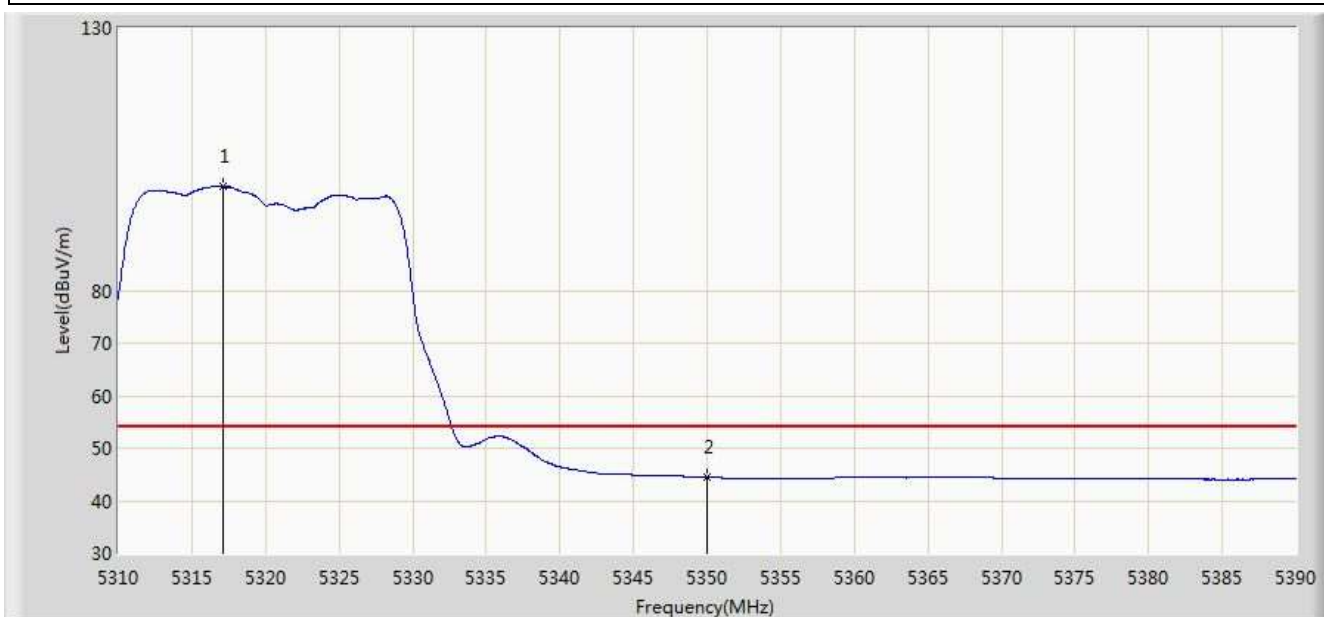

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.160	99.744	95.901	N/A	N/A	3.843	AV
2			5350.000	44.468	40.563	-9.532	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.640	113.793	109.936	N/A	N/A	3.857	PK
2			5350.000	57.640	53.735	-16.360	74.000	3.904	PK
3			5362.800	58.890	54.962	-15.110	74.000	3.928	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

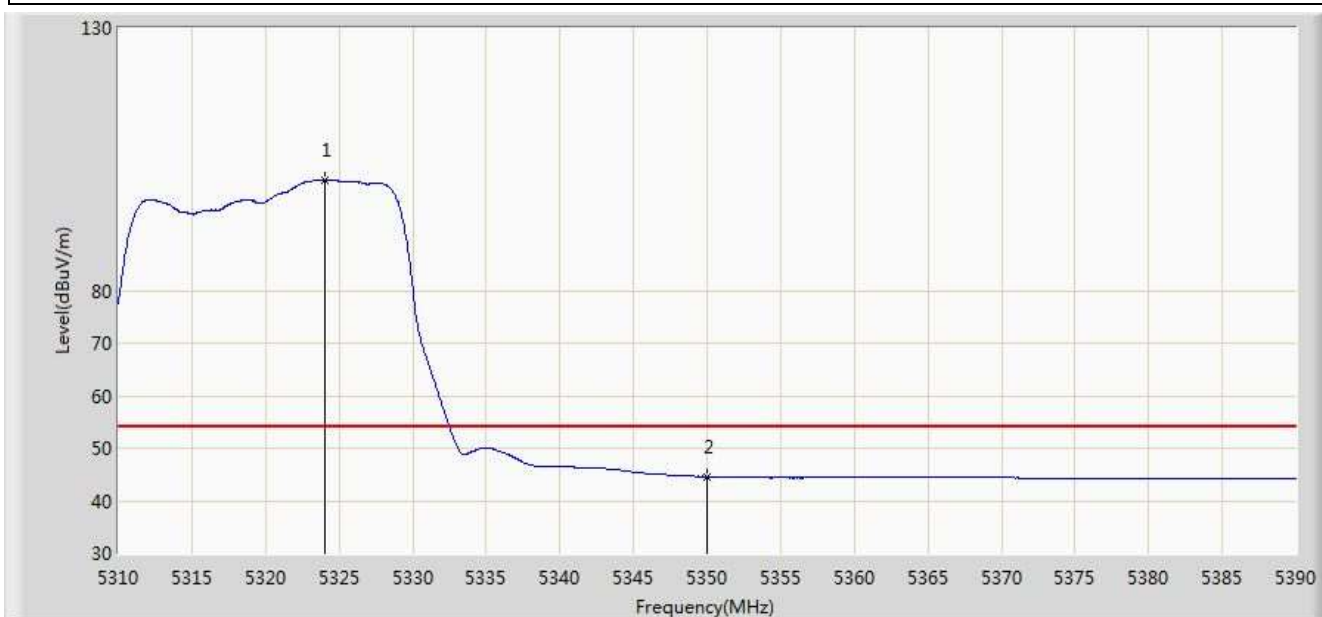


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.000	101.084	97.228	N/A	N/A	3.856	AV
2			5350.000	44.552	40.647	-9.448	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

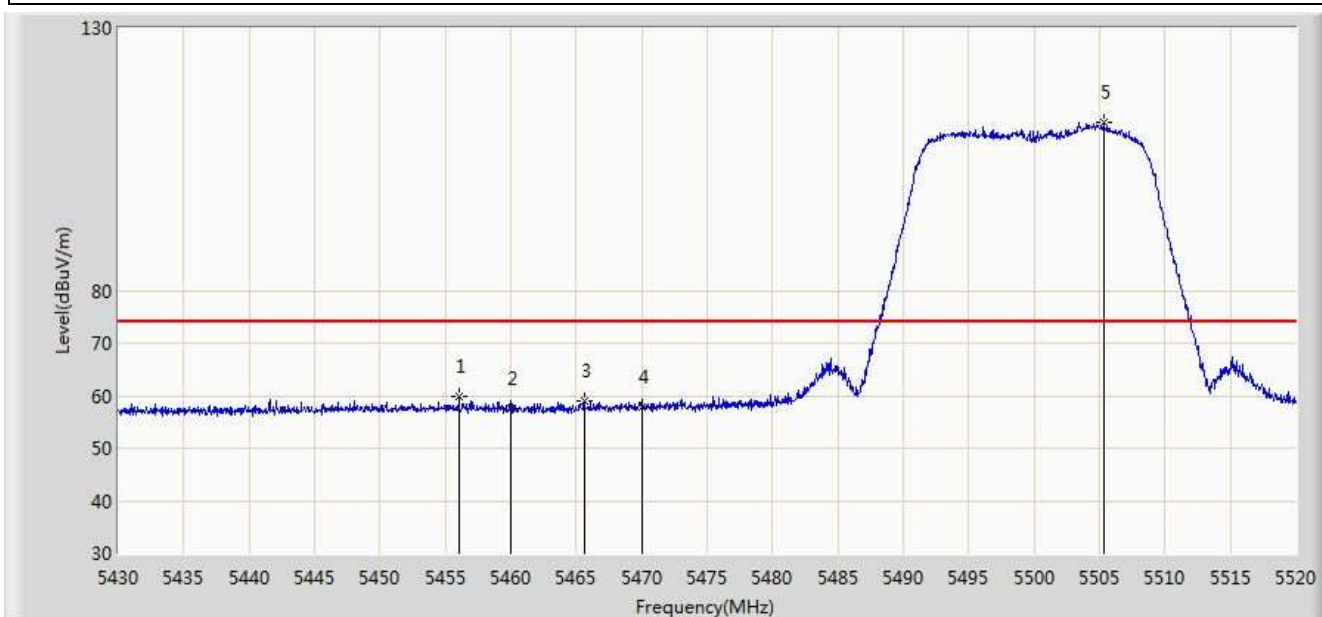


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.055	59.733	55.561	-14.267	74.000	4.172	PK
2			5460.000	57.645	53.465	-16.355	74.000	4.180	PK
3			5465.595	58.939	54.747	-15.061	74.000	4.193	PK
4			5470.000	57.788	53.586	-16.212	74.000	4.202	PK
5		*	5505.285	111.896	107.609	N/A	N/A	4.287	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

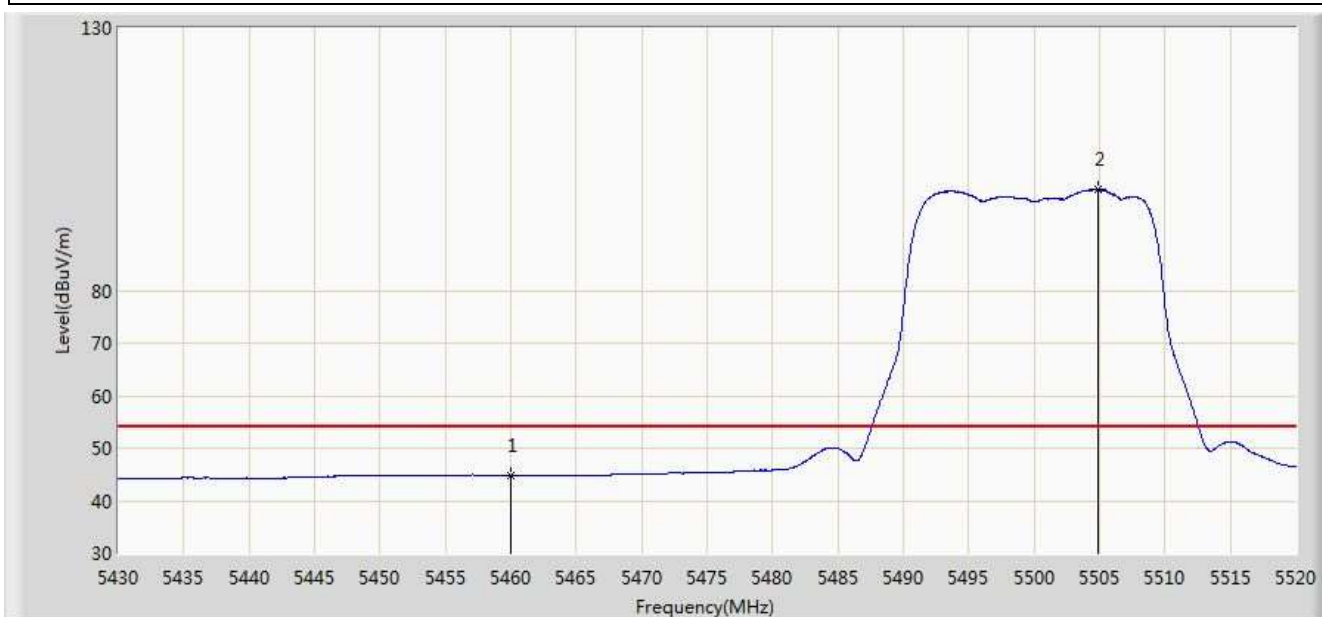


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.813	40.633	-9.187	54.000	4.180	AV
2		*	5504.835	99.170	94.884	N/A	N/A	4.286	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

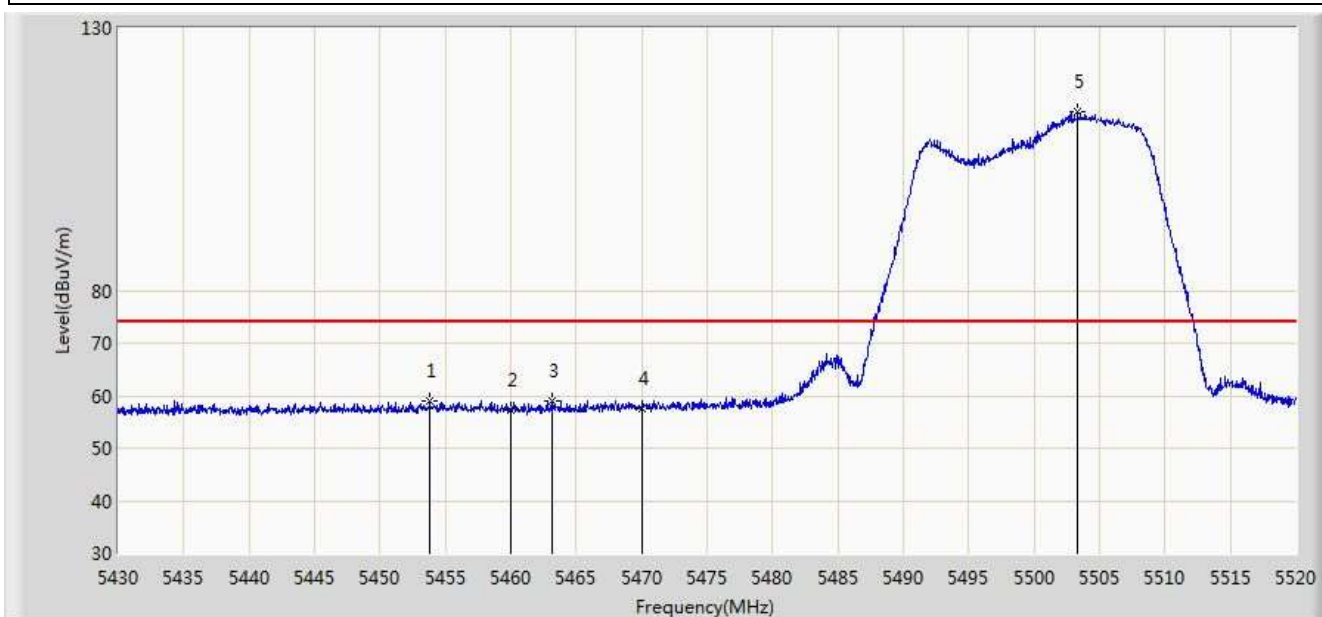


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.805	58.882	54.715	-15.118	74.000	4.168	PK
2			5460.000	57.239	53.059	-16.761	74.000	4.180	PK
3			5463.165	59.059	54.872	-14.941	74.000	4.187	PK
4			5470.000	57.522	53.320	-16.478	74.000	4.202	PK
5		*	5503.305	113.922	109.640	N/A	N/A	4.281	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

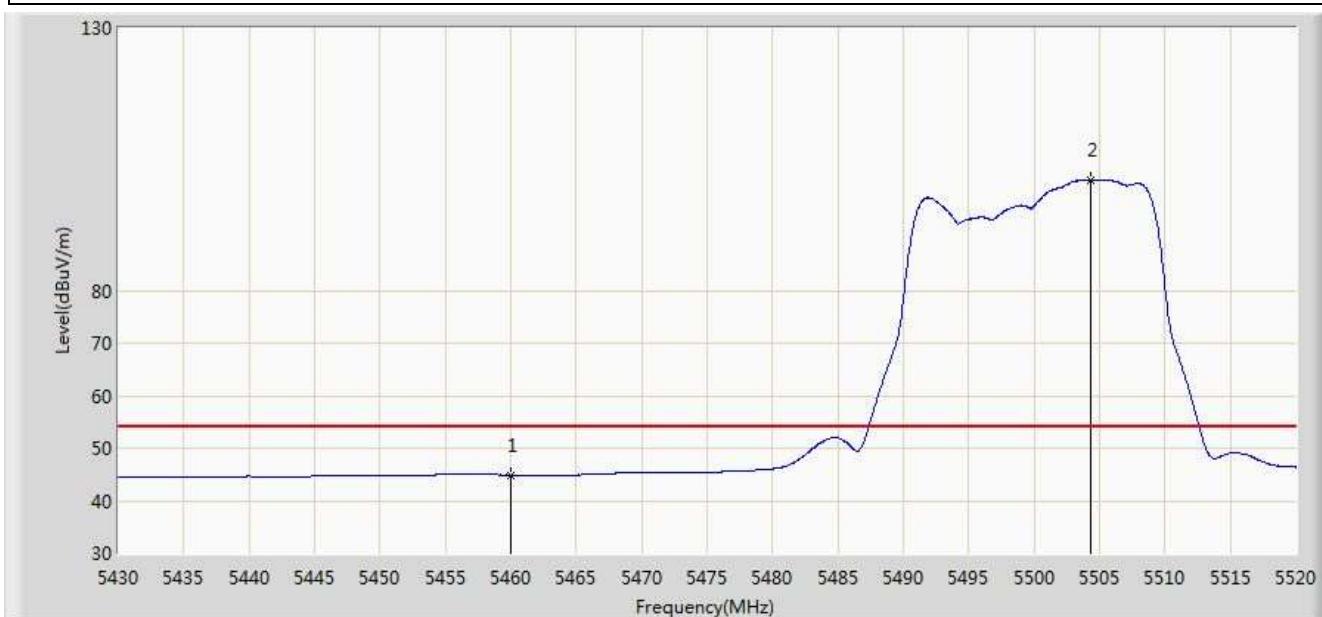


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.888	40.708	-9.112	54.000	4.180	AV
2		*	5504.295	101.088	96.803	N/A	N/A	4.284	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

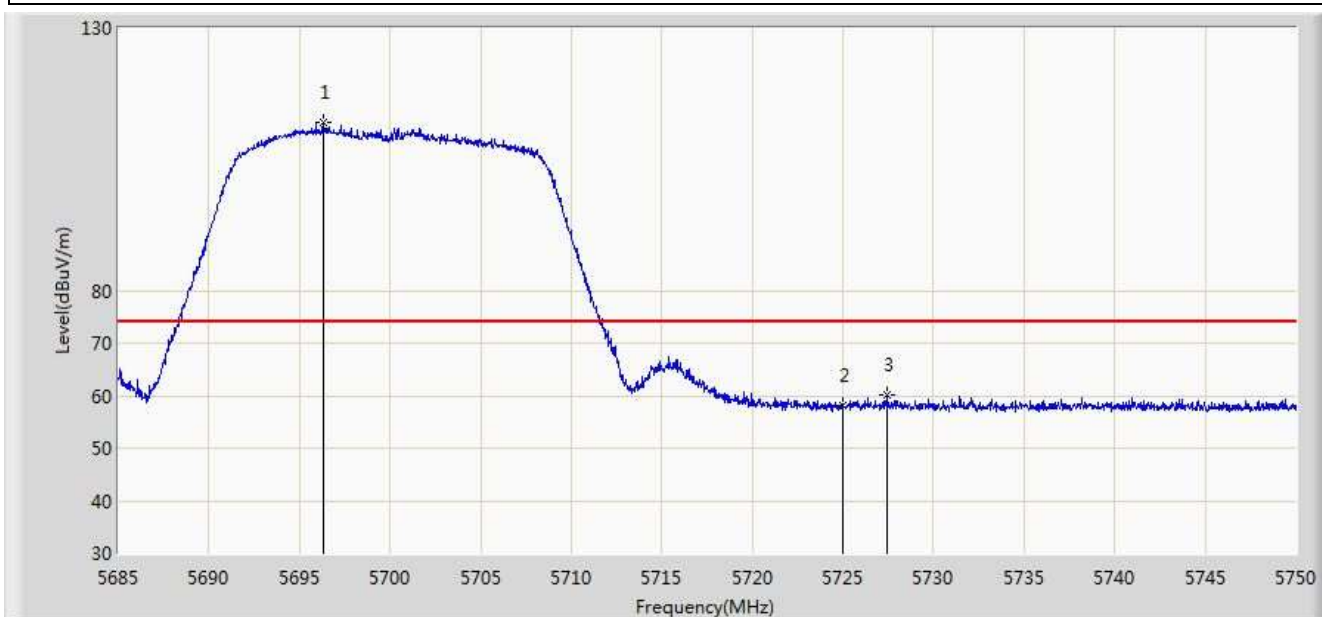


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.342	111.926	107.067	N/A	N/A	4.859	PK
2			5725.000	58.107	53.078	-15.893	74.000	5.029	PK
3			5727.478	60.011	54.966	-13.989	74.000	5.045	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

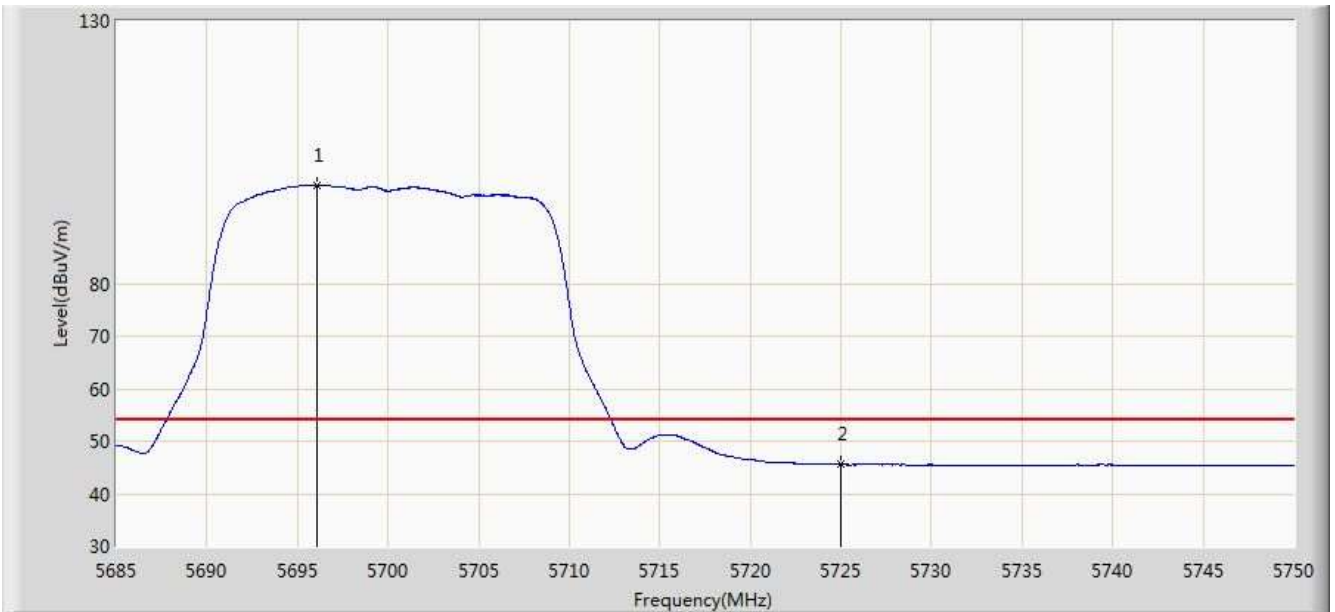


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.083	98.811	93.954	N/A	N/A	4.857	AV
2			5725.000	45.531	40.502	-8.469	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

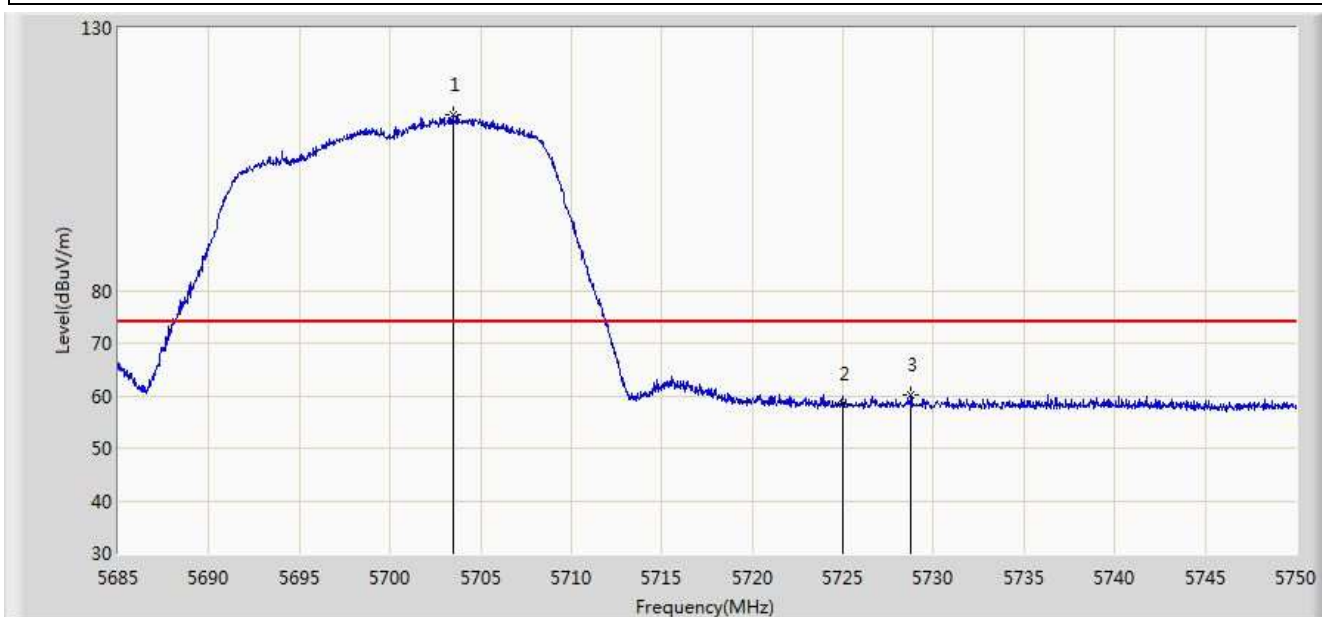


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.460	113.621	108.724	N/A	N/A	4.897	PK
2			5725.000	58.534	53.505	-15.466	74.000	5.029	PK
3			5728.777	60.269	55.216	-13.731	74.000	5.053	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

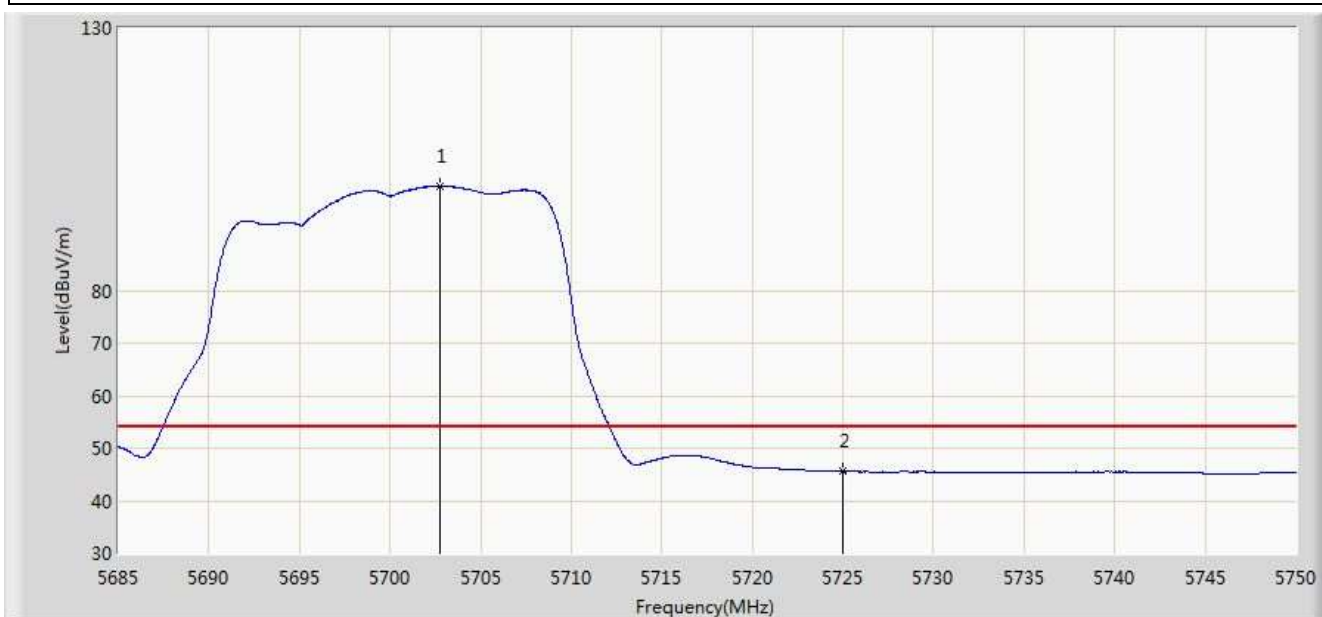


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.745	99.918	95.025	N/A	N/A	4.893	AV
2			5725.000	45.539	40.510	-8.461	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 20:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

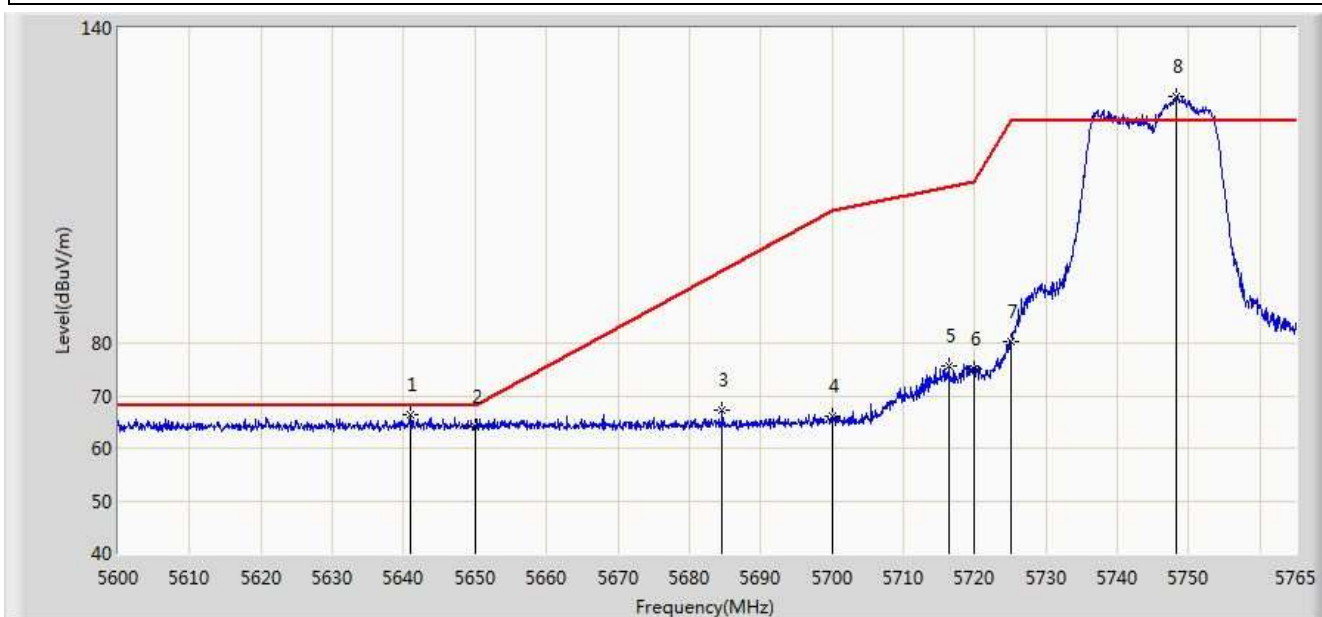


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.002	66.351	61.710	-1.849	68.200	4.641	PK
2			5650.000	64.041	59.370	-4.159	68.200	4.671	PK
3			5684.645	67.247	62.441	-26.625	93.872	4.805	PK
4			5700.000	66.013	61.135	-39.187	105.200	4.878	PK
5			5716.325	75.651	70.678	-34.121	109.772	4.974	PK
6			5720.000	74.933	69.936	-35.867	110.800	4.997	PK
7			5725.000	80.304	75.275	-41.896	122.200	5.029	PK
8		*	5748.170	126.967	121.794	N/A	N/A	5.173	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 21:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

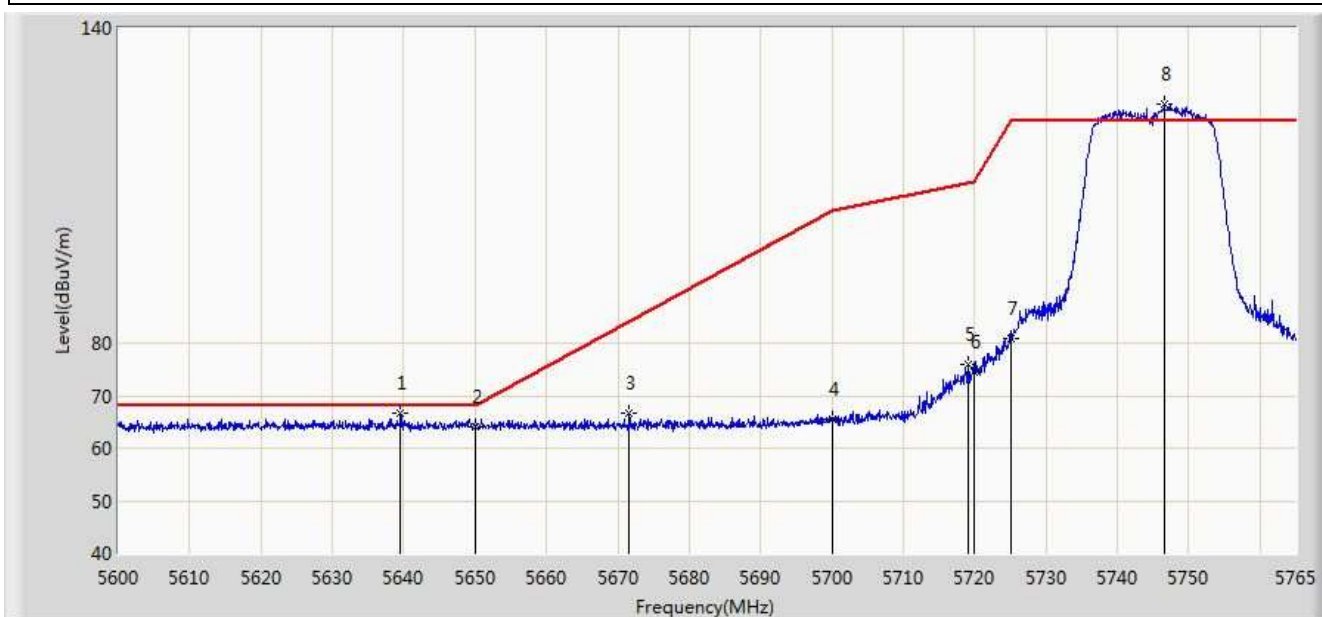

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5639.518	66.674	62.037	-1.526	68.200	4.637	PK
2			5650.000	63.969	59.298	-4.231	68.200	4.671	PK
3			5671.610	66.579	61.825	-17.653	84.231	4.754	PK
4			5700.000	65.613	60.735	-39.587	105.200	4.878	PK
5			5719.047	75.816	70.825	-34.718	110.534	4.990	PK
6			5720.000	74.374	69.377	-36.426	110.800	4.997	PK
7			5725.000	80.920	75.891	-41.280	122.200	5.029	PK
8		*	5746.603	125.557	120.393	N/A	N/A	5.165	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 21:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5829.765	126.449	120.833	N/A	N/A	5.616	PK
2			5850.000	79.833	74.107	-42.367	122.200	5.726	PK
3			5855.000	74.216	68.470	-36.584	110.800	5.746	PK
4			5875.000	65.015	59.195	-40.185	105.200	5.820	PK
5			5893.237	66.013	60.131	-25.655	91.668	5.882	PK
6			5925.000	64.488	58.522	-3.712	68.200	5.967	PK
7			5935.163	66.421	60.429	-1.779	68.200	5.992	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 21:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5829.570	125.132	119.517	N/A	N/A	5.614	PK
2			5850.000	77.747	72.021	-44.453	122.200	5.726	PK
3			5855.000	69.911	64.165	-40.889	110.800	5.746	PK
4			5855.993	70.440	64.690	-40.081	110.522	5.751	PK
5			5875.000	64.006	58.186	-41.194	105.200	5.820	PK
6			5897.917	65.955	60.058	-22.247	88.202	5.898	PK
7			5925.000	64.292	58.326	-3.908	68.200	5.967	PK
8			5957.197	66.885	60.846	-1.315	68.200	6.039	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 21:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

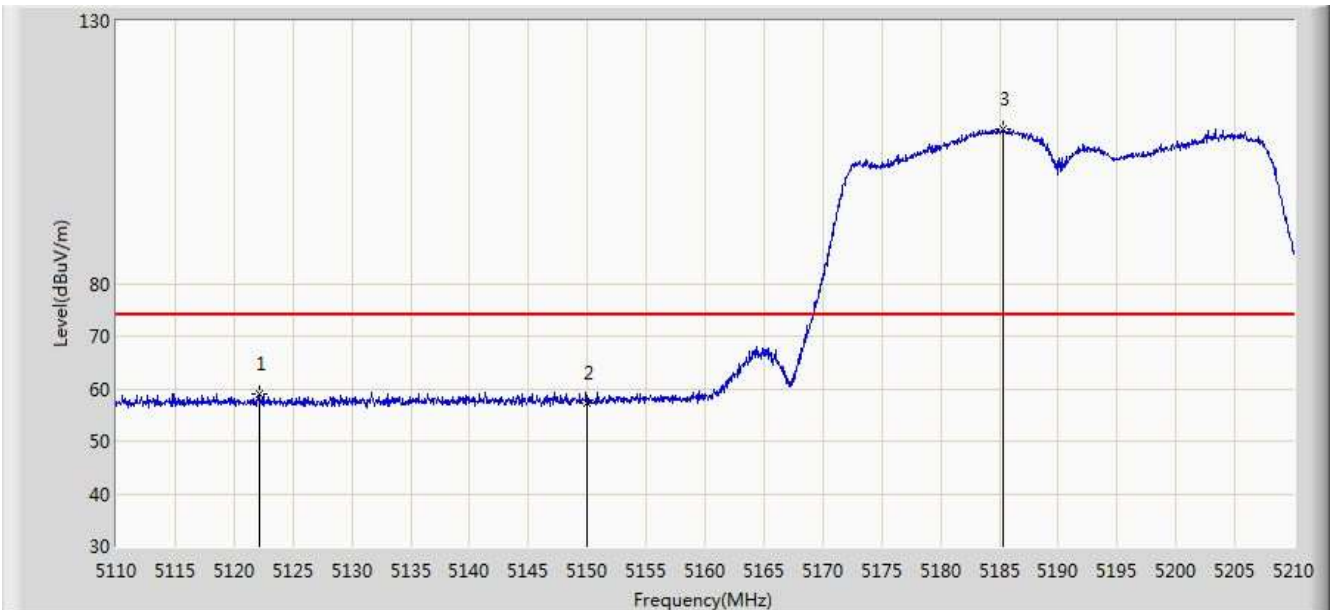


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5122.100	59.114	54.939	-14.886	74.000	4.174	PK
2			5150.000	57.363	53.194	-16.637	74.000	4.170	PK
3		*	5185.300	109.458	105.408	N/A	N/A	4.050	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 21:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

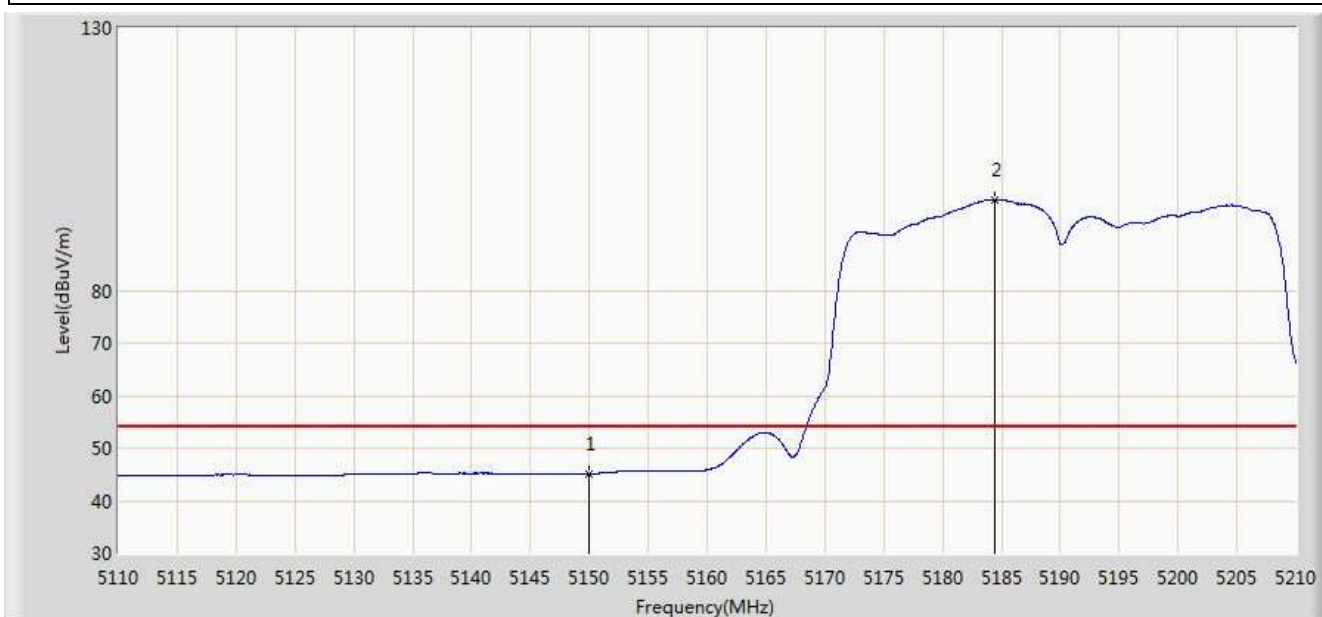


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.155	40.986	-8.845	54.000	4.170	AV
2		*	5184.450	97.315	93.262	N/A	N/A	4.053	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 21:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

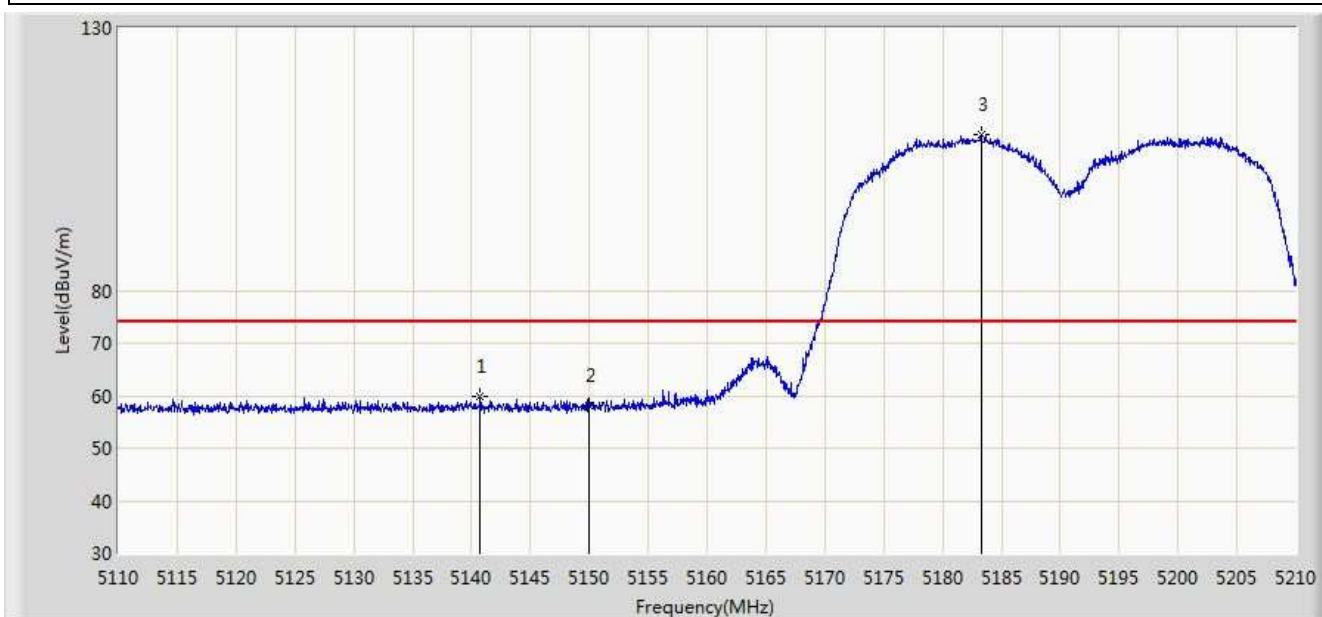


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.700	59.962	55.787	-14.038	74.000	4.176	PK
2			5150.000	58.198	54.029	-15.802	74.000	4.170	PK
3		*	5183.300	109.824	105.767	N/A	N/A	4.057	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/16 - 21:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

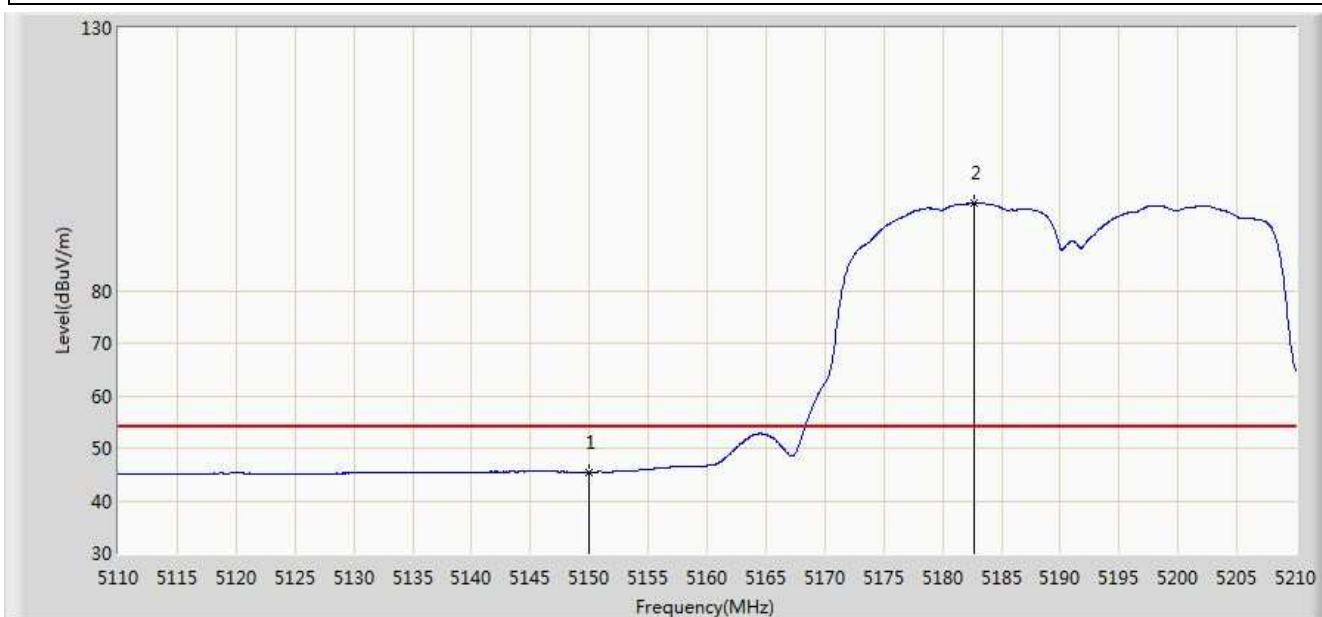


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.462	41.293	-8.538	54.000	4.170	AV
2		*	5182.650	96.625	92.566	N/A	N/A	4.060	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

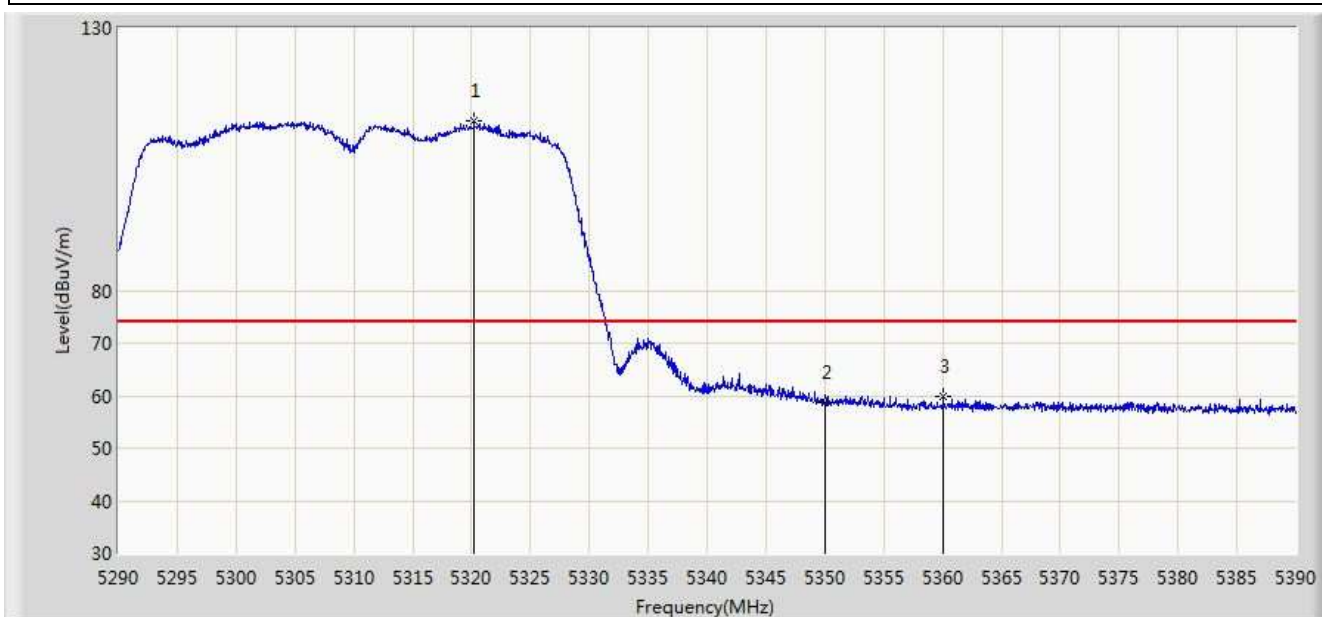


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.200	112.444	108.595	N/A	N/A	3.849	PK
2			5350.000	58.786	54.881	-15.214	74.000	3.904	PK
3			5360.050	59.811	55.888	-14.189	74.000	3.923	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

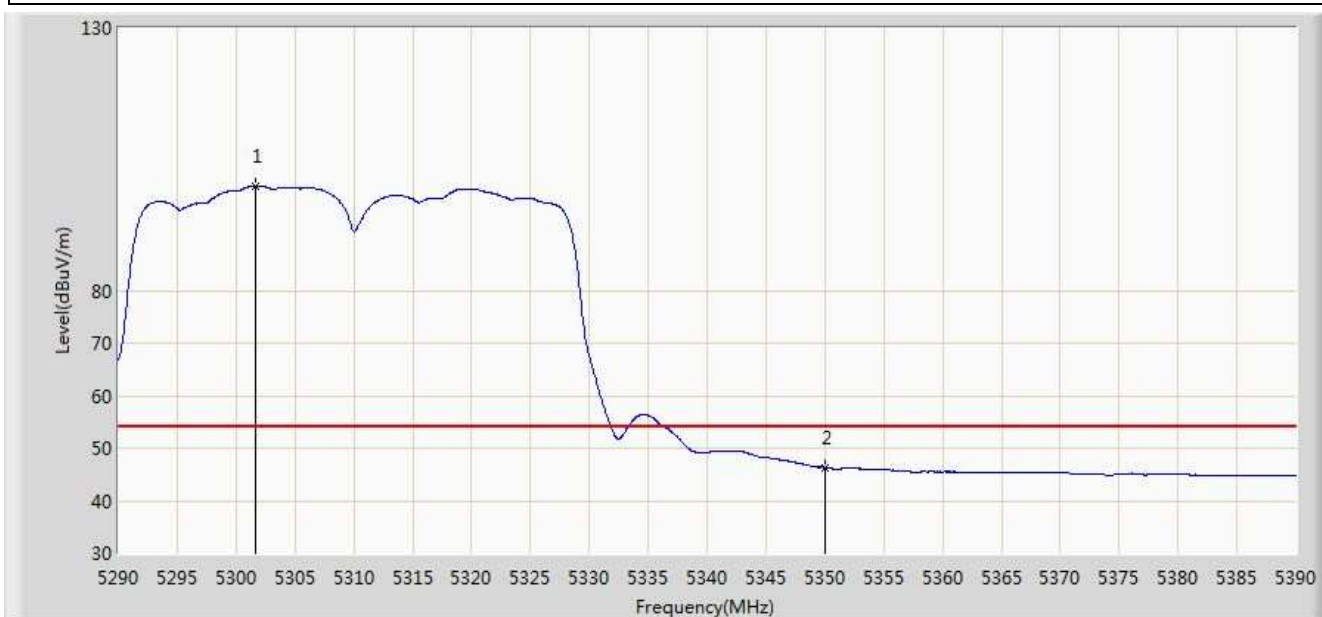


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5301.600	99.975	96.161	N/A	N/A	3.814	AV
2			5350.000	46.325	42.420	-7.675	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

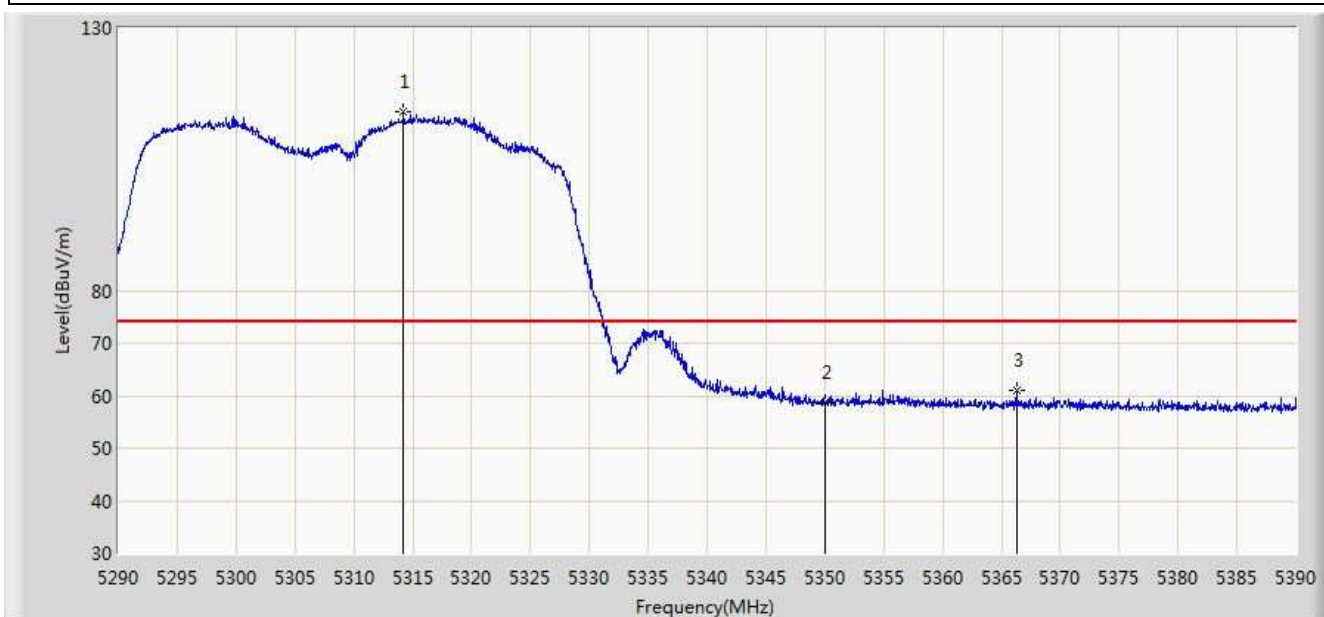


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.200	114.056	110.218	N/A	N/A	3.838	PK
2			5350.000	58.665	54.760	-15.335	74.000	3.904	PK
3			5366.300	60.902	56.968	-13.098	74.000	3.934	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

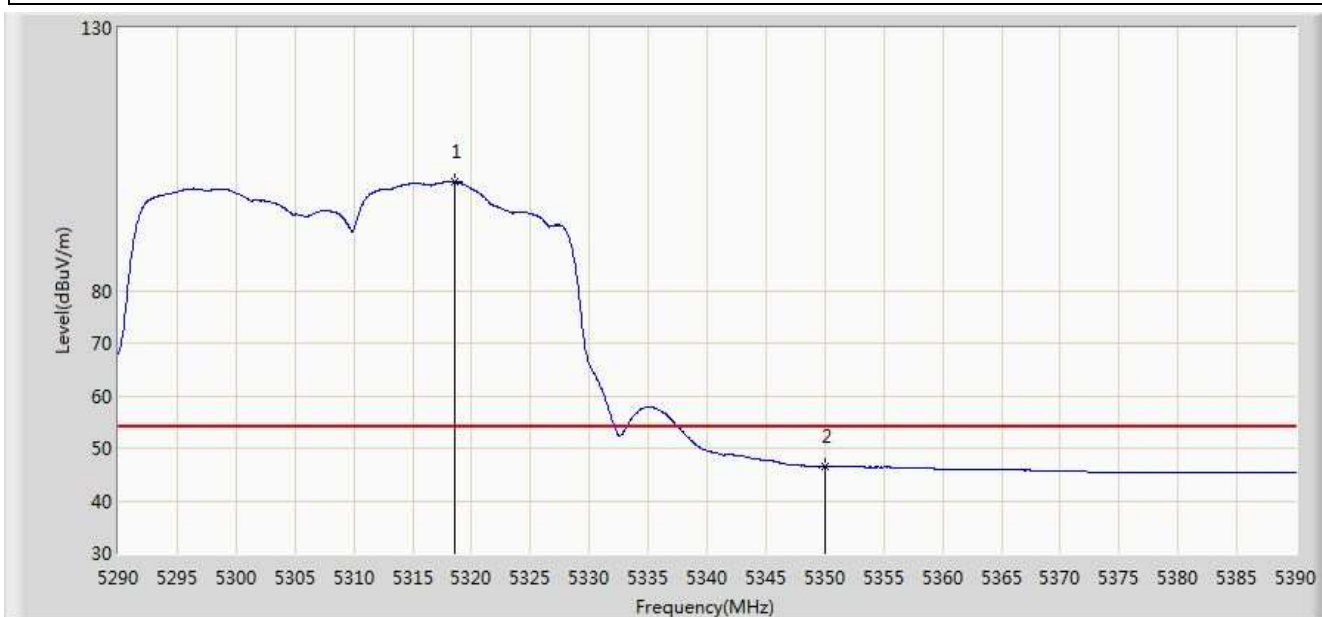


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.550	100.676	96.830	N/A	N/A	3.846	AV
2			5350.000	46.441	42.536	-7.559	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

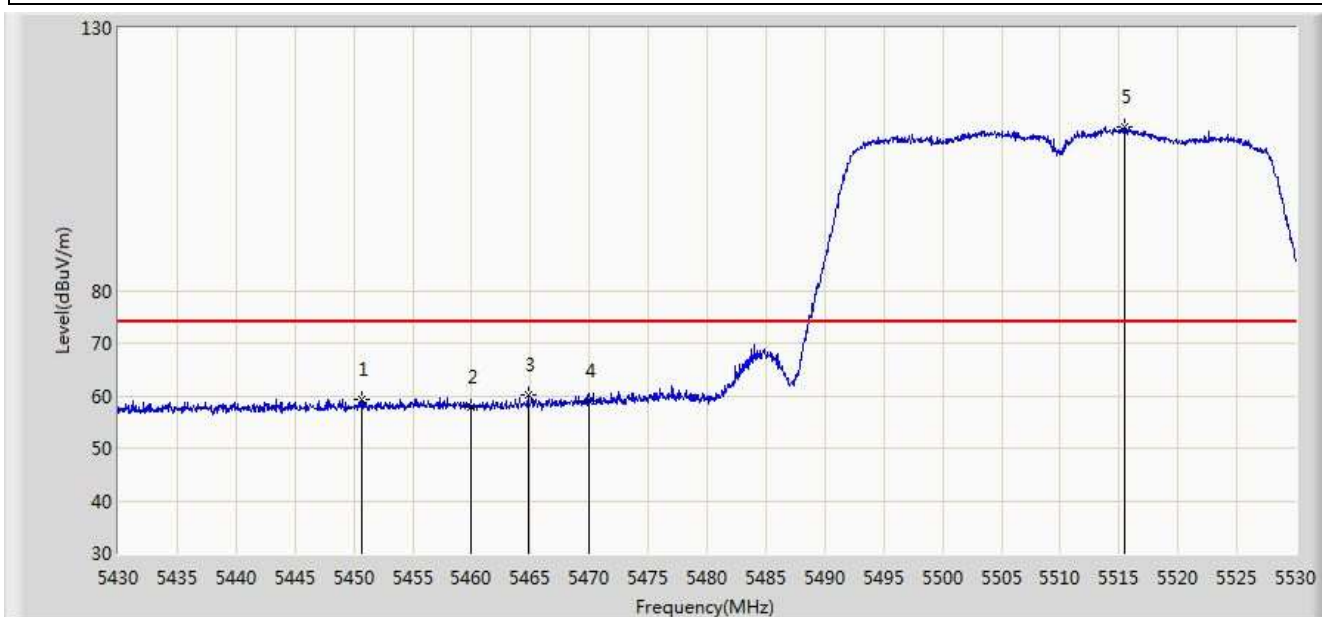


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.700	59.216	55.059	-14.784	74.000	4.157	PK
2			5460.000	57.705	53.525	-16.295	74.000	4.180	PK
3			5464.800	60.081	55.890	-13.919	74.000	4.191	PK
4			5470.000	59.016	54.814	-14.984	74.000	4.202	PK
5		*	5515.500	111.215	106.898	N/A	N/A	4.318	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

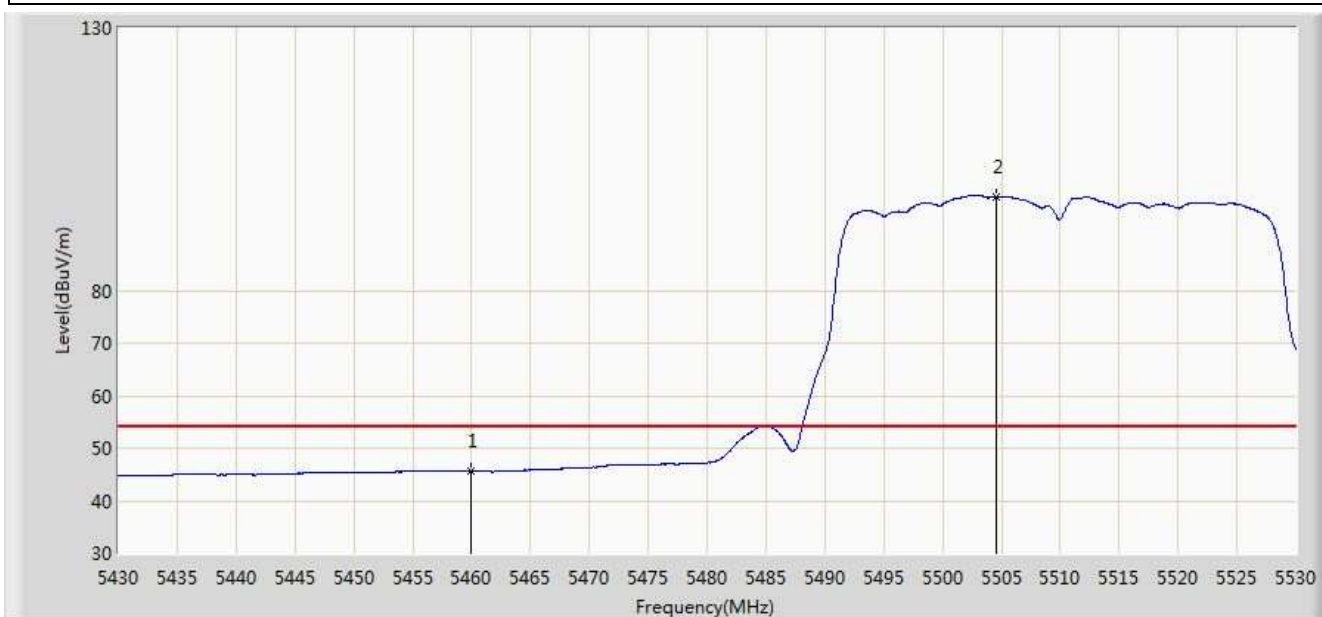


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.578	41.398	-8.422	54.000	4.180	AV
2		*	5504.600	97.927	93.642	N/A	N/A	4.286	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

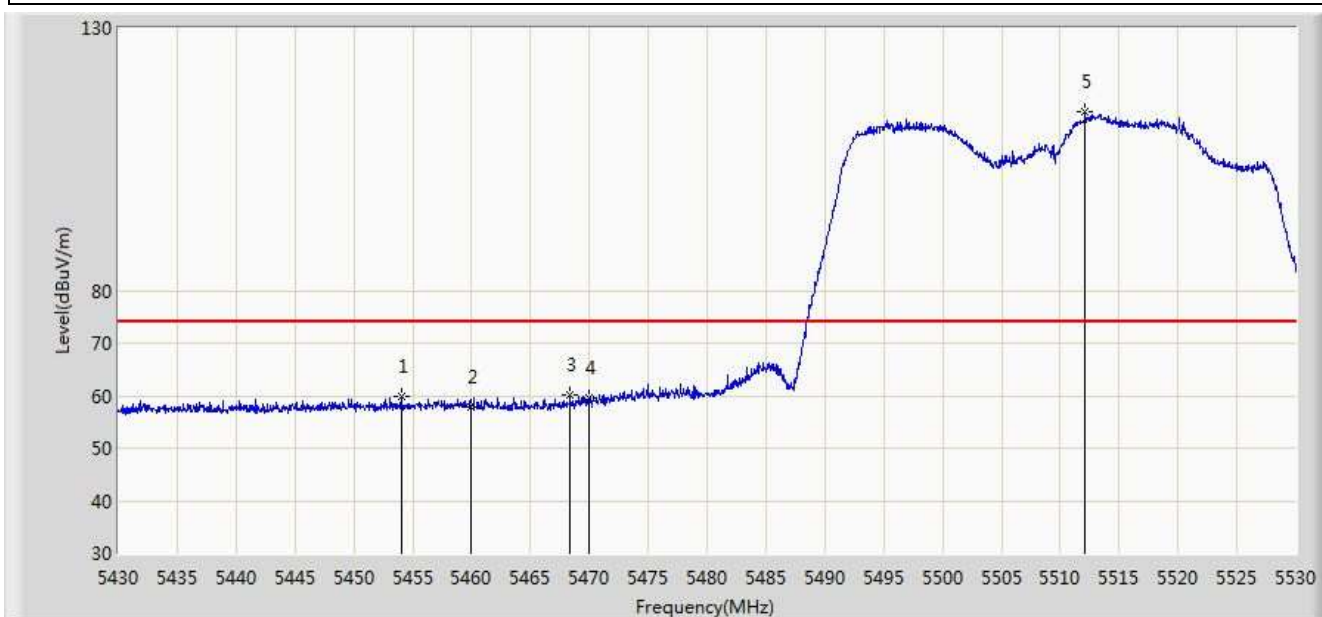


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.000	59.913	55.745	-14.087	74.000	4.168	PK
2			5460.000	57.855	53.675	-16.145	74.000	4.180	PK
3			5468.350	60.154	55.955	-13.846	74.000	4.198	PK
4			5470.000	59.616	55.414	-14.384	74.000	4.202	PK
5		*	5512.100	113.947	109.640	N/A	N/A	4.307	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

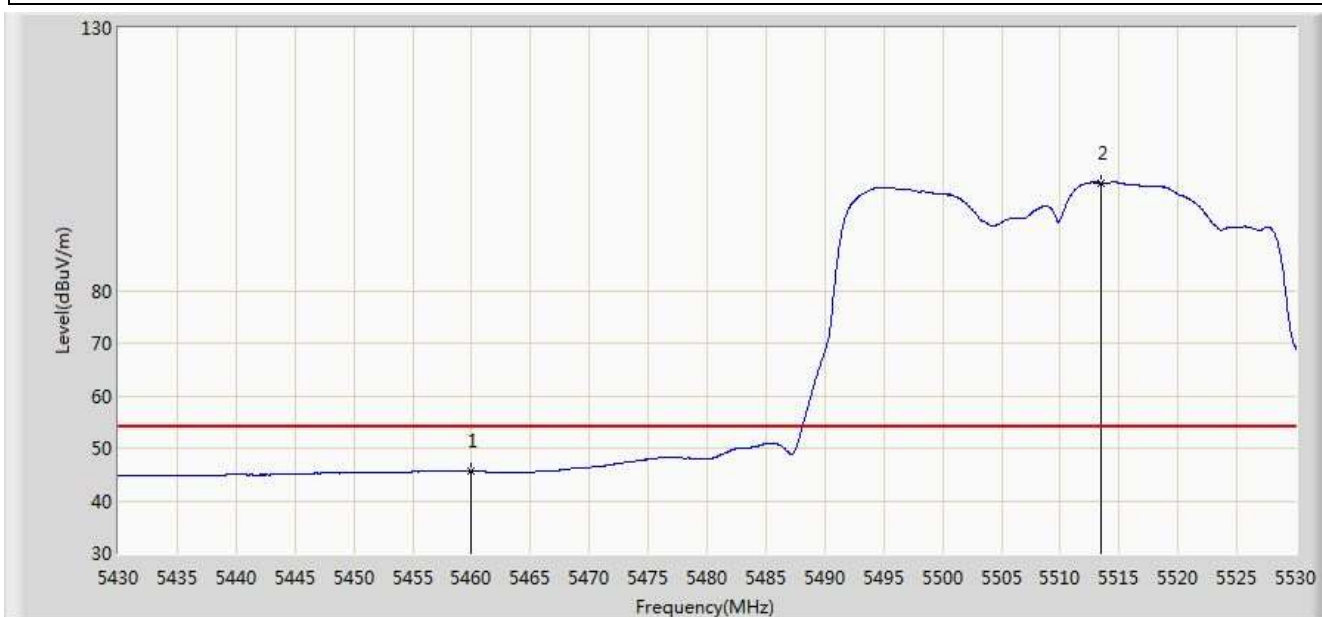


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.576	41.396	-8.424	54.000	4.180	AV
2		*	5513.450	100.501	96.190	N/A	N/A	4.311	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

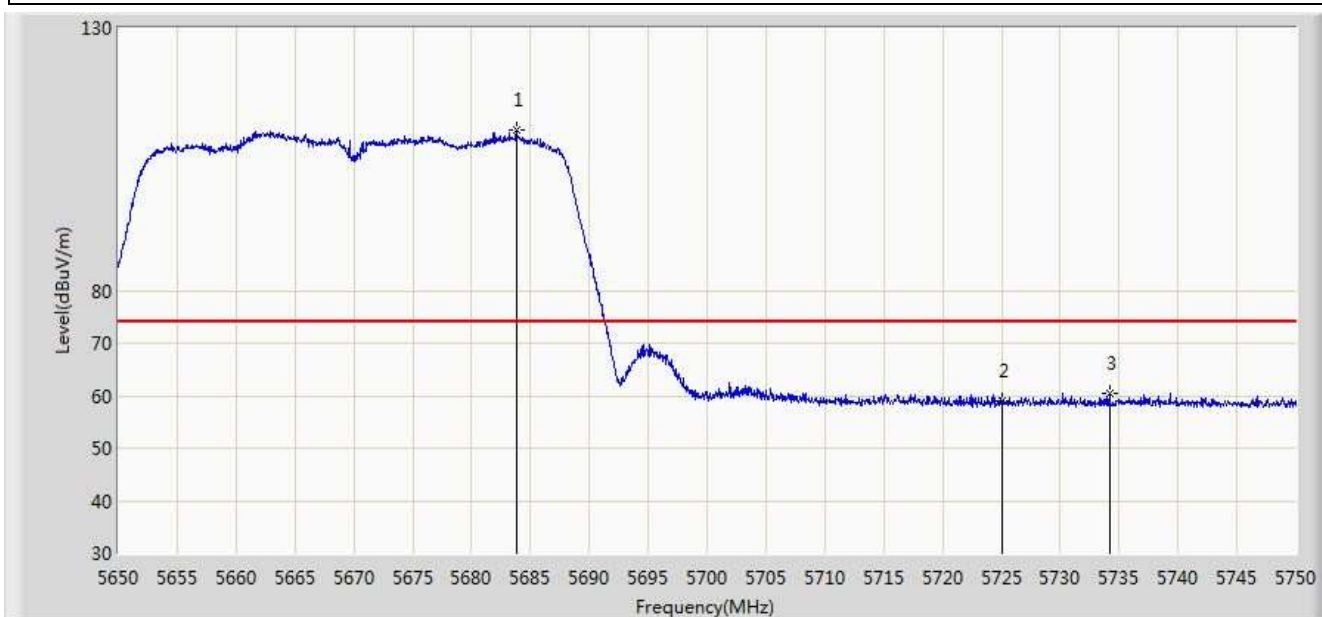


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5683.800	110.517	105.714	N/A	N/A	4.802	PK
2			5725.000	58.916	53.887	-15.084	74.000	5.029	PK
3			5734.150	60.326	55.239	-13.674	74.000	5.087	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

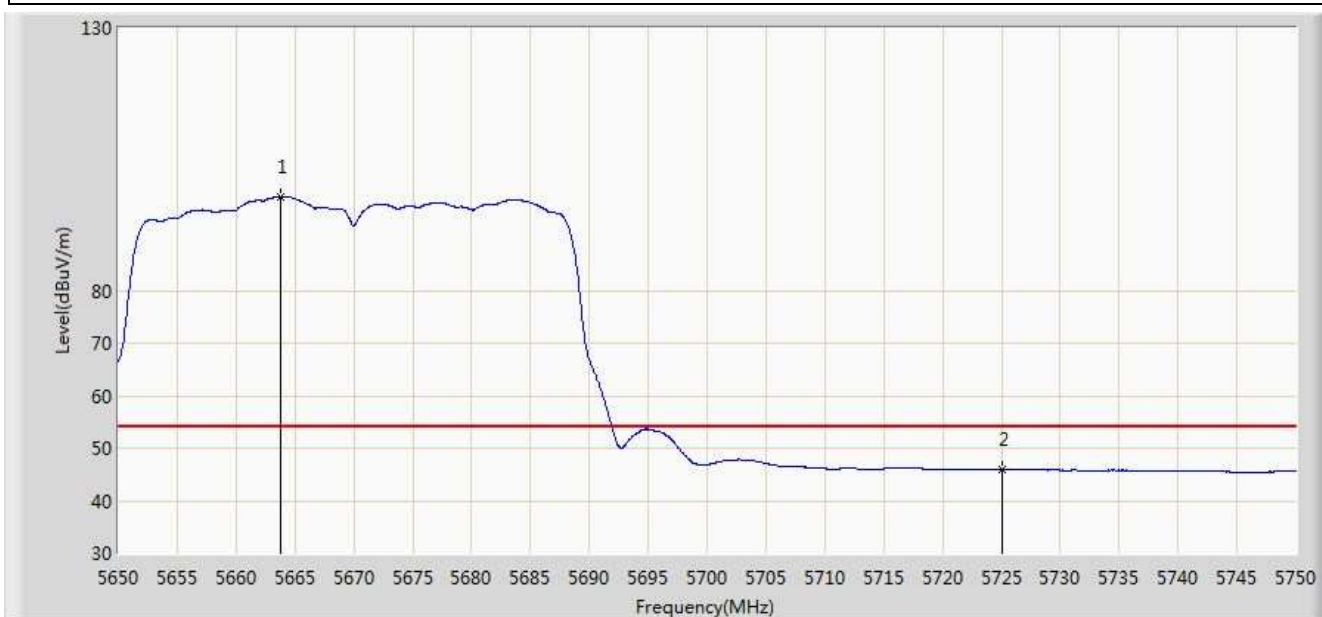


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5663.750	97.857	93.135	N/A	N/A	4.722	AV
2			5725.000	45.848	40.819	-8.152	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

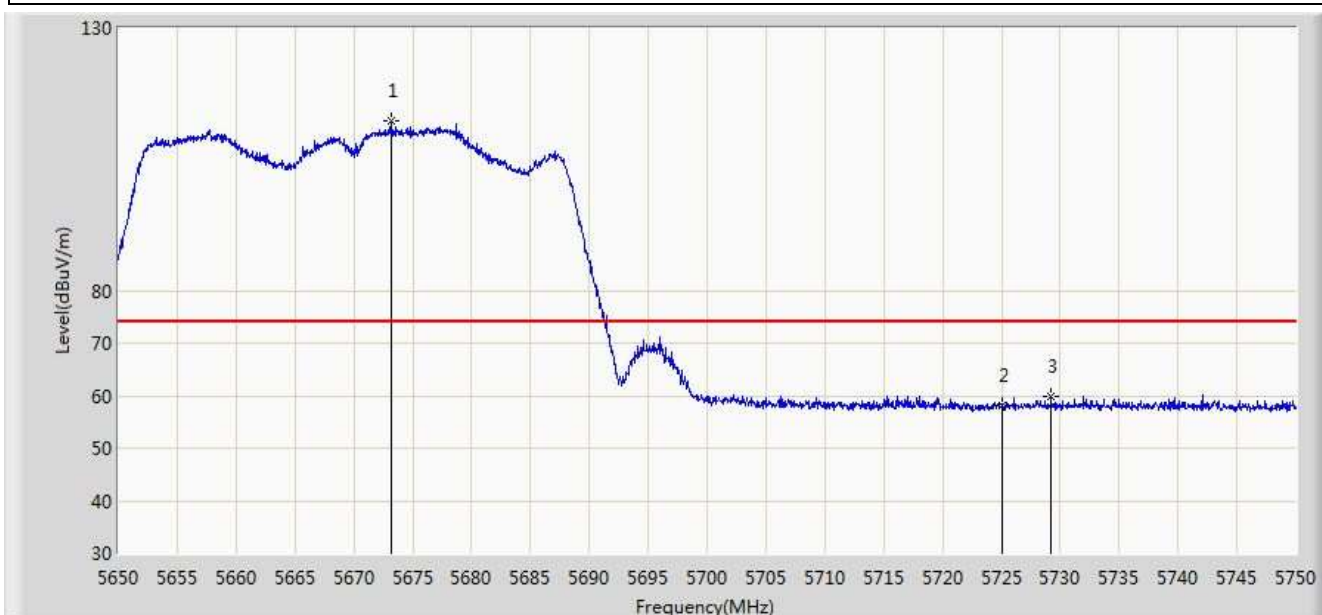


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.200	112.202	107.442	N/A	N/A	4.760	PK
2			5725.000	58.260	53.231	-15.740	74.000	5.029	PK
3			5729.200	59.833	54.777	-14.167	74.000	5.055	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 21:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

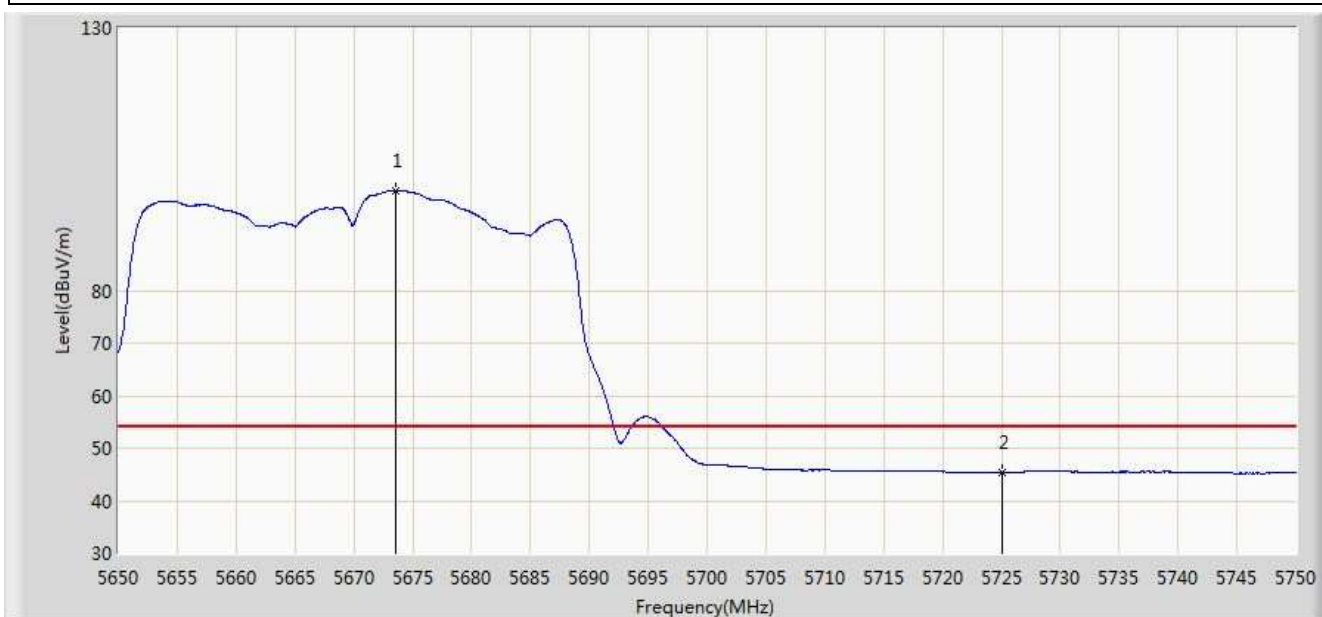


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.600	98.948	94.186	N/A	N/A	4.762	AV
2			5725.000	45.391	40.362	-8.609	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 22:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

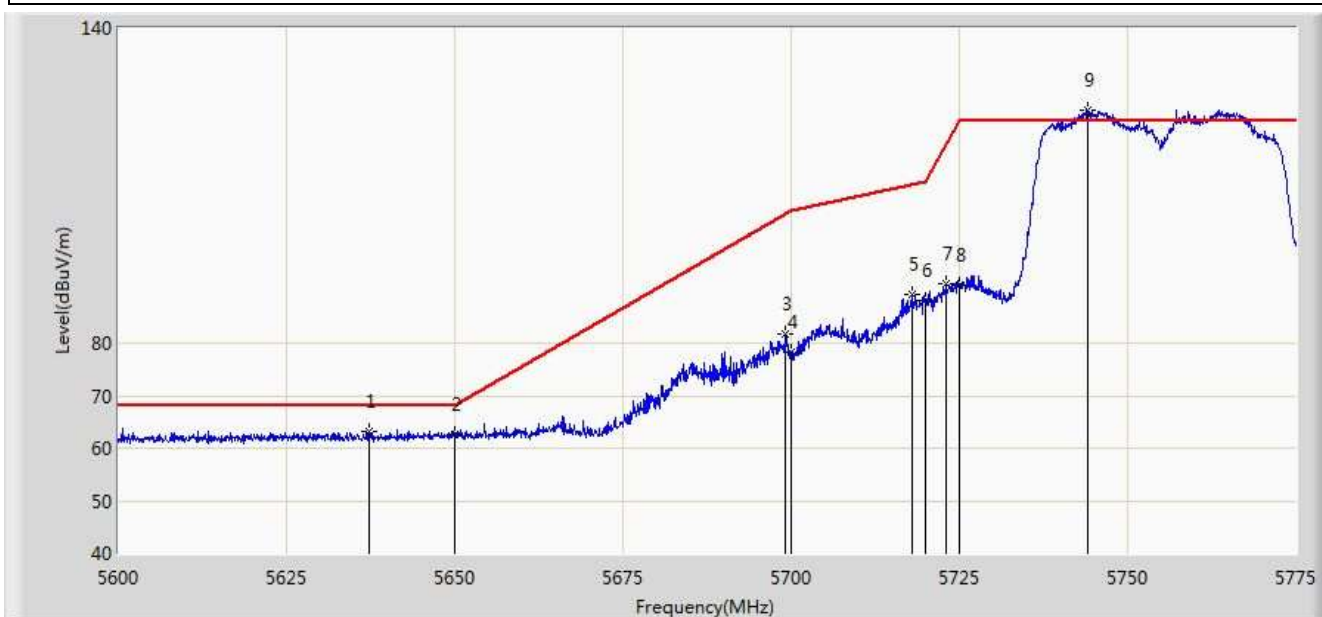


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5637.362	63.293	58.663	-4.907	68.200	4.630	PK
2			5650.000	62.491	57.820	-5.709	68.200	4.671	PK
3			5699.138	81.654	76.780	-22.911	104.565	4.874	PK
4			5700.000	78.369	73.491	-26.831	105.200	4.878	PK
5			5717.950	89.347	84.363	-20.880	110.227	4.984	PK
6			5720.000	88.066	83.069	-22.734	110.800	4.997	PK
7			5722.937	91.170	86.154	-26.328	117.498	5.015	PK
8			5725.000	91.048	86.019	-31.152	122.200	5.029	PK
9		*	5744.025	124.490	119.341	N/A	N/A	5.149	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 22:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

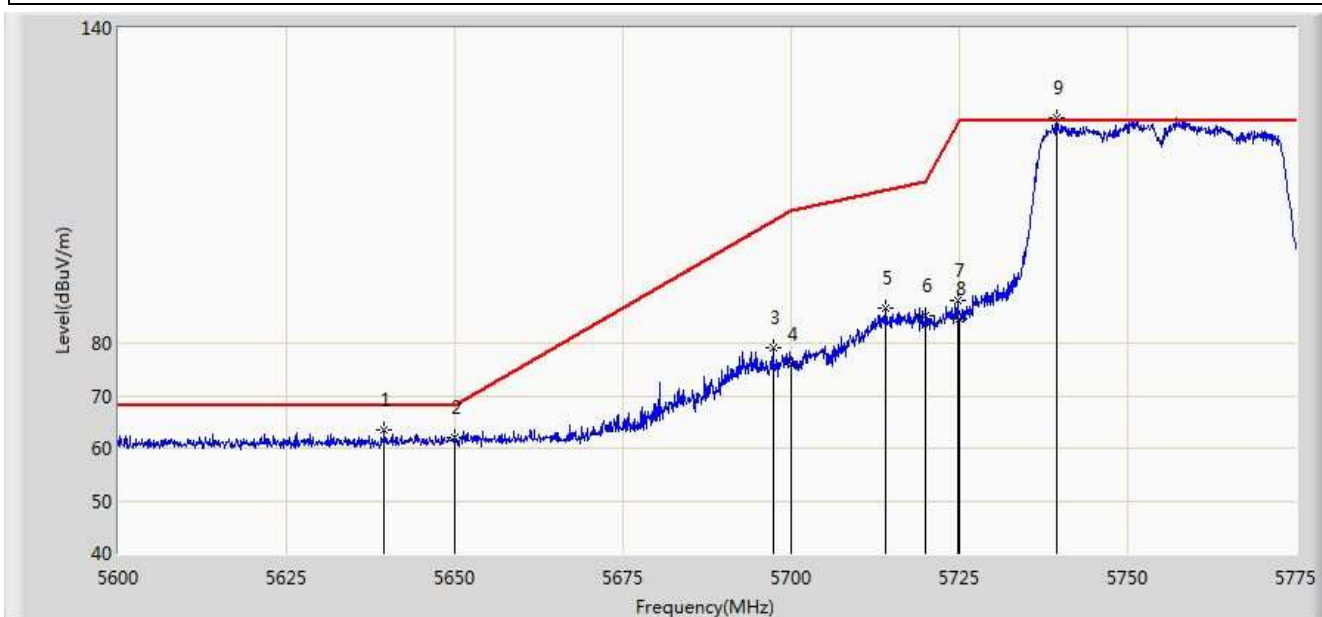


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5639.550	63.615	58.978	-4.585	68.200	4.637	PK
2			5650.000	61.935	57.264	-6.265	68.200	4.671	PK
3			5697.300	79.129	74.265	-24.081	103.210	4.865	PK
4			5700.000	75.942	71.064	-29.258	105.200	4.878	PK
5			5714.100	86.578	81.619	-22.572	109.150	4.960	PK
6			5720.000	85.278	80.281	-25.522	110.800	4.997	PK
7			5724.687	88.202	83.175	-33.285	121.487	5.027	PK
8			5725.000	84.507	79.478	-37.693	122.200	5.029	PK
9		*	5739.388	122.926	117.805	N/A	N/A	5.120	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 22:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

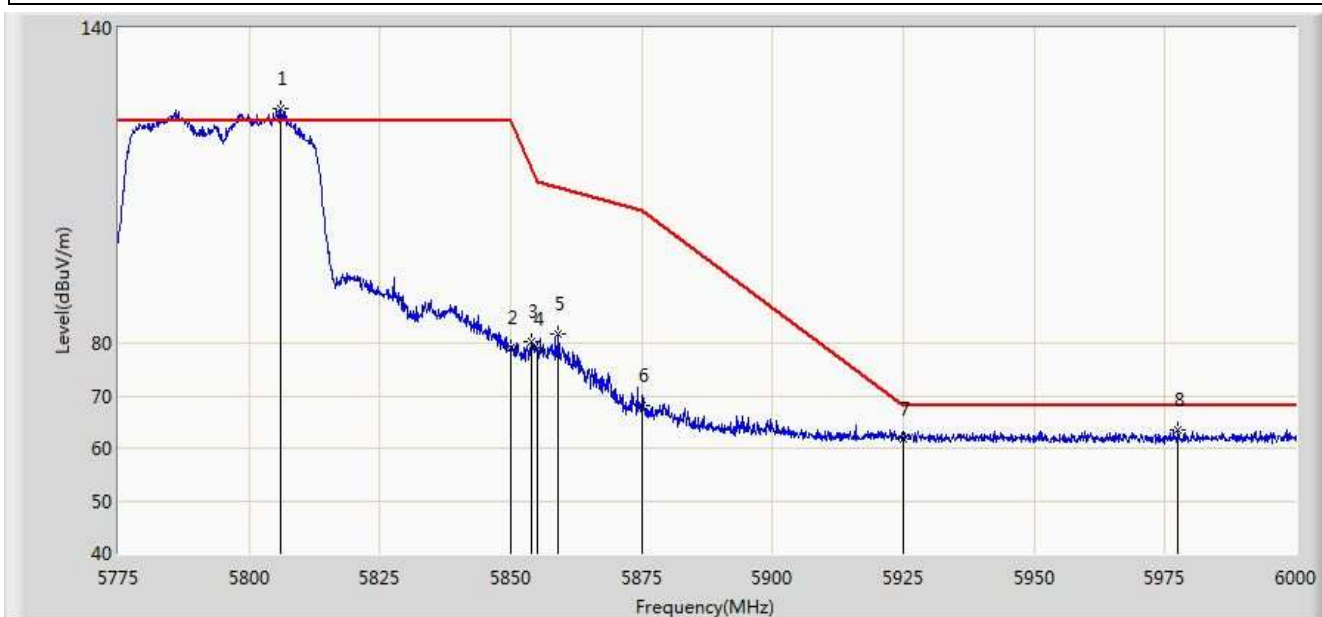


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5806.050	124.524	119.045	N/A	N/A	5.478	PK
2			5850.000	79.158	73.432	-43.042	122.200	5.726	PK
3			5854.087	80.215	74.473	-32.665	112.881	5.743	PK
4			5855.000	78.918	73.172	-31.882	110.800	5.746	PK
5			5859.150	81.805	76.042	-27.831	109.636	5.764	PK
6			5875.000	68.084	62.264	-37.116	105.200	5.820	PK
7			5925.000	61.795	55.829	-6.405	68.200	5.967	PK
8			5977.500	63.552	57.479	-4.648	68.200	6.073	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/14 - 22:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: POE (DC 55V)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

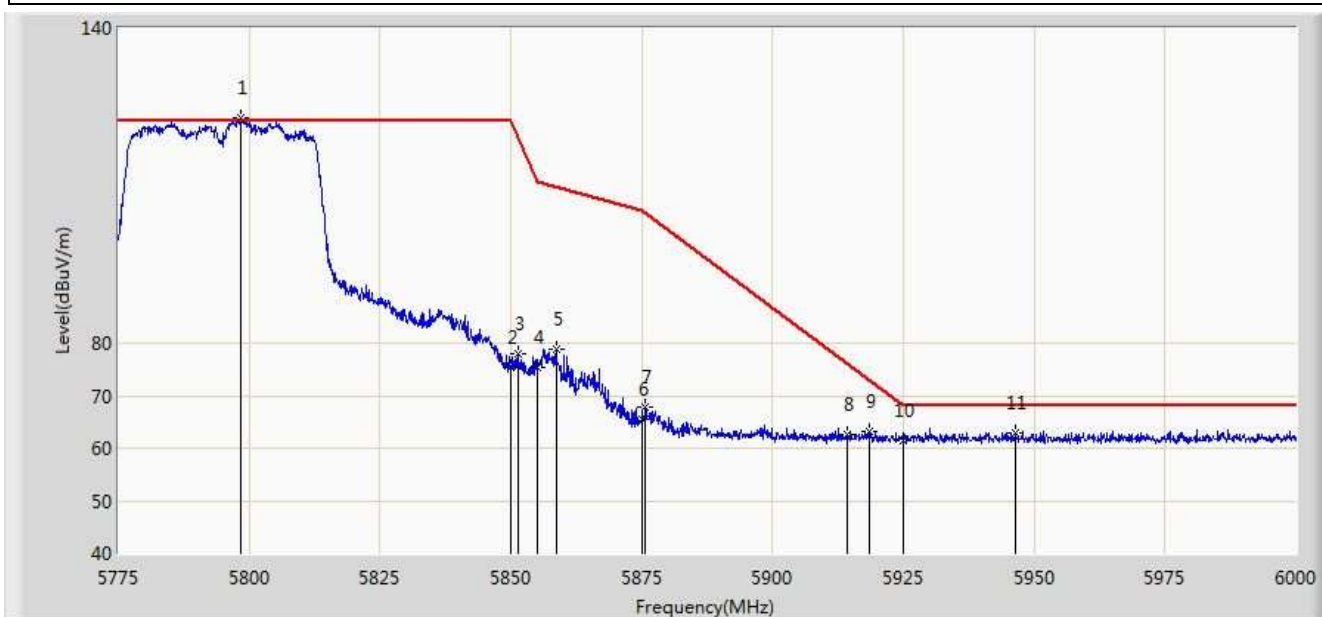

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5798.400	123.008	117.572	N/A	N/A	5.436	PK
2			5850.000	75.466	69.740	-46.734	122.200	5.726	PK
3			5851.275	77.996	72.265	-41.296	119.292	5.731	PK
4			5855.000	75.239	69.493	-35.561	110.800	5.746	PK
5			5858.700	78.742	72.980	-31.021	109.763	5.761	PK
6			5875.000	65.530	59.710	-39.670	105.200	5.820	PK
7			5875.687	67.736	61.914	-36.953	104.689	5.822	PK
8			5914.163	62.570	56.630	-13.623	76.193	5.939	PK
9			5918.437	63.148	57.198	-9.890	73.039	5.950	PK
10			5925.000	61.345	55.379	-6.855	68.200	5.967	PK
11			5946.450	62.975	56.956	-5.225	68.200	6.019	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)