

TEST REPORT

Specific Wireless Devices

for

Products Name: STRATACACHE PLAYER

Model No.: Refer to section 2.2

Report No.: SST2606E092

Issued Date: 2026-6-8

Issued for

Stratacache Asia-Pacific Pte. Ltd.

133 Cecil Street #04-02 Keck Seng Tower Singapore 069535

Issued by

Dongguan Qiyang Testing Technology Co., Ltd.

Room 101-1, Building 1, No.19, Tianxin Butterfly 1st Road, Huangjiang, Dongguan, Guangdong, China



General disclaimer:

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing Dongguan Qiyang Testing Technology Co., Ltd. The authenticity of this test report and its contents can be verified by contacting the Dongguan Qiyang Testing Technology Co., Ltd., responsible for this test report.

Table of Contents

1. BASIC INTRODUCTION	3
2. GENERAL DESCRIPTION.....	4
2.1. EUT DESCRIPTION.....	4
2.2. SERIAL MODEL(S) AND MODEL DIFFERENCE	4
2.3. AUXILIARY EQUIPMENT.....	4
2.4. DESCRIPTION OF TEST MODES AND CONDITION.....	5
2.5. TEST ENVIRONMENTAL CONDITIONS.....	5
2.6. STATEMENT OF MEASUREMENT UNCERTAINTY	5
2.7. REPORT MODIFICATION RECORD.....	6
2.8. TEST FACILITY.....	6
2.9. ADDITIONAL INSTRUCTION	6
2.10. OTHER INFORMATION.....	6
3. VERDICT SUMMARY SECTION	7
4. LIST OF TEST EQUIPMENT	8
5. TECHNICAL REQUIREMENT AND MEASUREMENT DATA.....	9
5.1. CABINET	9
5.2. ANTENNA POWER.....	10
5.3. FREQUENCY TOLERANCE.....	11
5.4. OCCUPIED BANDWIDTH.....	12
5.5. SPURIOUS EMISSION INTENSITY	13
5.6. SECOND RADIATED EMISSION	14
5.7. BURST LENGTH	15
5.8. ADJACENT CHANNEL LEAKAGE POWER	16
5.9. INTERFERENCE PREVENTION FUNCTION.....	17
5.10. CARRIER SENSE CAPABILITY.....	18
6. TEST SETUP PHOTO.....	18
7. PHOTO OF THE EUT.....	20
8. TEST RESULT	21

1. Basic Introduction

Applicant's name :	Stratacache Asia-Pacific Pte. Ltd.	
Address	133 Cecil Street #04-02 Keck Seng Tower Singapore 069535	
Manufacturer's name	Stratacache Asia-Pacific Pte. Ltd.	
Address	133 Cecil Street #04-02 Keck Seng Tower Singapore 069535	
Factory's name	Stratacache Asia-Pacific Pte. Ltd.	
Address	133 Cecil Street #04-02 Keck Seng Tower Singapore 069535	
Products Name :	STRATACACHE PLAYER	
Model No. :	Refer to section 2.2	
Trade Mark	STRATACACHE	
Rating(s)	Adapter Model: HKA06012050-0A7 Input: 100-240V, 50/60Hz Output: DC 12.0V 5A	
Date of sample receipt :	2026-5-14	
Date of Test :	2026-5-14~2026-6-5	
Standard(s)	Article 2 paragraph 1 item(19)-3 MIC Notice No.88 Annex 1 MIC Notice No.88 Annex 45	
Tested by (+signature) :	Connor Ma	
Check by (+signature) :	Davis Zhou	
Approved by (+signature) :	Tiger Chen	



2. General description

2.1. EUT description

Products Name	STRATACACHE PLAYER	
Model No.	Refer to section 2.2	
Rating(s)	Adapter Model: HKA06012050-0A7 Input: 100-240V, 50/60Hz Output: DC 12.0V 5A	
Software version	V1.0	
Hardware version	FP530V10	
Operation frequency	5180-5320MHz, 5500~5700MHz	
Modulation technology	802.11a/n/ac/ax	
Supported Bandwidth	20M, 40M, 80M	
DFS Function	Slave without radar detection	
TPC Function	No	
Antenna type	External antenna	
Antenna Gain	3.03 dBi	
Cable	Name	Description
	AC line	☐ Shielded ☒ Unshielded ☒ Detachable ☐ Un-detachable ☐ No applicable ☒ Length:0.8m

Note: 802.11ax not support partial RU mode, all test configurations are solely applicable to Full RU.

2.2. Serial model(s) and model difference

Main model(s)	SMP-Q-wIV-AP
Serial model(s)	SMP-R-el-AP, SMP-S-el-AP, SMP-SP-all-AP, SMP-L-el-AP, SMP-DX-all-AP, SMP-QX-wIV-AP, SMP-H-FVI-AP, SMP HX-vI-AP
Model difference	All models were in same PCB design and internal structure. The only difference is model name.

2.3. Auxiliary equipment

Support equipment list			
Description	Manufacturer	Model No.	Serial No.
Support cable list			
Description	Specified length(m)	Shielded	Unshielded
		☐	☐

2.4. Description of test modes and condition

Mode 1	Continuously transmit		
Mode 2	Receiver status		
Mode 3	Normal operation		
Temperature(°C):	24.2		
Humidity (%):	46		
Atmospheric pressure:	100.9kPa		
Power Supply			
Voltage Fluctuations Test	Normal voltage	Low voltage (-10%)	High voltage (+10%)
Input to EUT (DC,V)	12	10.8	13.2
To RF Module (DC, V)	3.3	3.3	3.3
Voltage Variation (%)	-	0	0

Note1: $\text{Voltage Variation}(\%) = (\text{Output high or Low Voltage} - \text{Output Normal Voltage}) / \text{Output Normal Voltage} * 100$.

Note2: After checking the fluctuation of input voltage to the circuit of the radio part (excluding the power supply) of the equipment to be tested, the fluctuation less than +/-1% when input voltage from an external supply into the equipment fluctuates +/-10%, therefore, the test is carried out only at the normal voltage.

2.5. Test environmental conditions

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.

The climatic conditions during the tests were within the following limits:

Ambient temperature	Relative humidity	Atmospheric pressure
15 °C ~ 35 °C	30 % ~ 60 %	86 kPa ~ 106 kPa

If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.

2.6. Statement of Measurement Uncertainty

Test Item	Uncertainty
Uncertainty for Conducted emissions	3.31 dB
Uncertainty for Radiated emission (30 MHz to 1 GHz)	4.53 dB

Uncertainty for Radiated emission (above 1 GHz)	4.80 dB
RF power, conducted	1.08 dB
Power Spectral Density, Conducted	1.46 dB
Spurious Emissions, Conducted	2.94 dB
Occupied bandwidth	57.74 kHz
Dwell Time	2%
Frequency	3%
Measurement Uncertainty Decision Rule Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3 and 4.3.4.	

2.7. Report modification record

Report No.	Issue Date	Description
SST2606E092	2026-6-8	Original Report

2.8. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:	
CNAS	Registration No.: L17883
Location	Dongguan Qiyang Testing Technology Co., Ltd. Room 101-1, Building 1, No.19, Tianxin Butterfly 1st Road, Huangjiang, Dongguan, Guangdong, China

2.9. Additional Instruction

Test Software	DRTU
Power level setup	Default

2.10. Other information

The laboratory responsible for all the information provided in the report, except those information provided by the applicant.

The applicant shall fully responsible for the information they provided.

The report would be invalid without a stamp of test laboratory and the signatures of compiler and approver.

The laboratory has not been responsible for the sampling stage; the test report merely corresponds to the test sample received.

Any objection to the test report shall submitted to the test laboratory within 15 days from the date of receipt of the report.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

3. Verdict summary section

Requirement – Test case	Result
RF shielding method	Pass
Tolerance of Frequency	Pass
Antenna Power and EIRP	Pass
Occupied bandwidth	Pass
Adjacent Channel Power Tolerance	Pass
Burst Length Measurement	Pass
Spurious Emissions Intensity	Pass
Secondary radiated emissions	Pass
Interference Prevention Function	Pass
carrier sense function	Pass
DFS	n/a, client without radar detection device, it completely obey the master device's command
Number of carrier	Pass (This device has more than 1 subcarrier in 1MHz, compliances with the requirement.)

Test case verdicts	
- Test case does not apply to the test object	N/A
- Test object does meet the requirement.....	P (Pass)
- Test object does not meet the requirement.....	F (Fail)

4. List of Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
RF conducted					
Spectrum Analyzer	keysight	N9020A	MY51280659	2026/04/09	2027/04/09
Signal Generator	Agilent	N5181A	MY48180054	2026/04/09	2027/04/09
Signal Generator	keysight	N5172B	MY57281610	2026/04/09	2027/04/09
Spectrum Analyzer	R&S	FSV40-N	101791	2026/04/09	2027/04/09
Wideband Radio Communication Tester	R&S	CMW500	123123	2026/04/09	2027/04/09
RF Switch Box	TST PASS	TST V2	/	2026/04/09	2027/04/09
Thermohygrometer	KTJ	TA218A	879032	2026/04/09	2027/04/09
DC power supply	Lodestar	LPS6010D	LP2303371	/	/
Temperature and humidity chamber	Guangdong fenghe	FH-TH-1000	FH24032017	2026/03/10	2027/03/10
Test Software	TST PASS	TST PASS	V2.0	/	/

Calibration Information (Article 24-2, Paragraph 4 of the Radio Act)

	a. Calibration conducted by the National Institute of Information and Communications Technology (NICT) or a designated calibration agency under Article 102-18-1 of the Radio Act
	b. Calibration conducted based on the regulations of Articles 135 or 144 of the measurement Act
✓	c. Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 of the Radio Act
	d. Calibration, etc. conducted by using measuring instruments and other facilities listed at the bottom of appended table 3 of the Radio Act, which is to have been calibrated as described in (a)through (c) above

5. Technical Requirement and Measurement Data

5.1. Cabinet

Requirement:

The high-frequency section and modulation section (except for the antenna system) shall not be capable of being opened easily

Shielding method:

Refer to SST2606E089

5.2. Antenna Power

Limit


Antenna Power: Tolerance: -80% ~ 20%(W52, W53); -50% ~ 50%(W56)

DSSS, etc.	OFDM		
DSSS: 10mW/MHz	20M system	40M system	80M system
etc.: 10mW	10mW/MHz	5mW/MHz	2.5mW/MHz

EIRP:

	20M system	40M system	80M system
W52	10mW/MHz	5mW/MHz	2.5mW/MHz
W53	10mW/MHz: with TPC	5mW/MHz: with TPC	2.5mW/MHz: with TPC
	5mW/MHz: without TPC	2.5mW/MHz: without TPC	1.25mW/MHz: with TPC
W56	50mW/MHz: with TPC	25mW/MHz: with TPC	12.5mW/MHz: with TPC
	25mW/MHz: without TPC	12.5mW/MHz: without TPC	6.25mW/MHz: with TPC

Block diagram of Test Setup

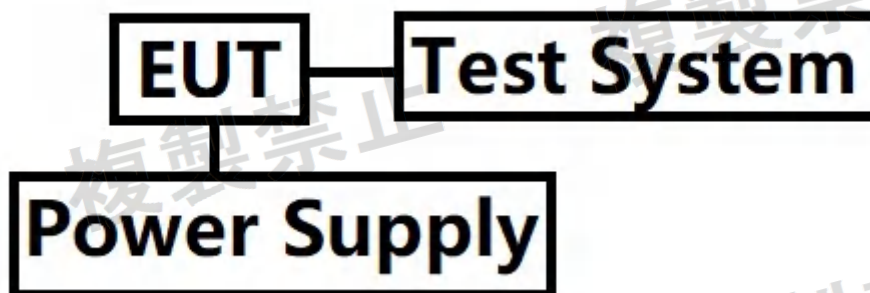

Test Setup

Test Frequency: centre Frequency
 Span: Max allowed to capture the trace
 RBW: 1MHz
 VBW: 3MHz
 Sweep Time: Auto
 Detector: Peak
 Trace: Max hold.
 Mark the highest peak value, then centre the frequency
 Span: 0Hz
 RBW: 1MHz
 VBW: 1MHz
 Sweep: Single
 Detector: RMS
 Measure the burst power.
 EIRP = conducted power + antenna gain


Verdict

Pass

5.2.1. Test Result

Refer to section 8 for details


5.3. Frequency Tolerance

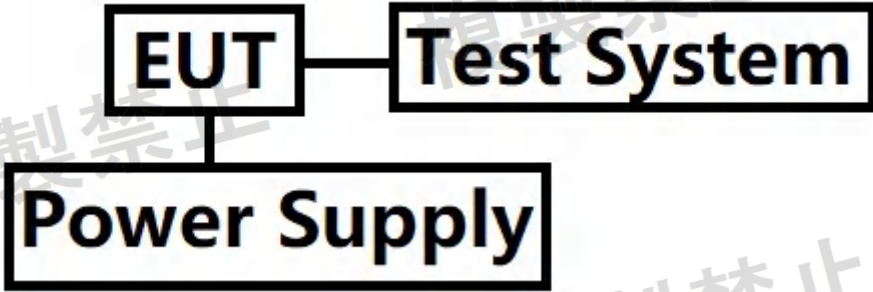Limit
$\pm 20 \times 10^{-6}$
Block diagram of Test Setup
 <pre> graph LR PS[Power Supply] --- EUT[EUT] EUT --- TS[Test System] </pre>
Test Setup
Test Frequency: centre Frequency Span: 1MHz RBW: 10kHz VBW: =RBW Sweep Time: Auto Detector: Peak Trace: Max hold While the trace is stabilized, mark the highest transmit frequency
Verdict
Pass

5.3.1. Test Result

Refer to section 8 for details

5.4. Occupied Bandwidth

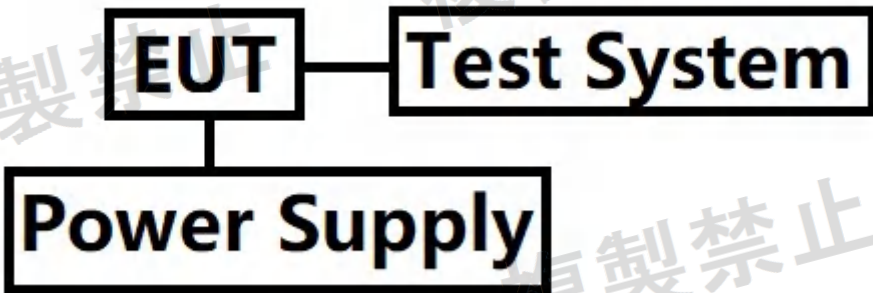Limit
For 20MHz system: $\leq 20\text{MHz}$; For 40MHz system: $\leq 40\text{MHz}$; For 80MHz system: $\leq 80\text{MHz}$;
Block diagram of Test Setup
 <pre> graph TD PS[Power Supply] --- EUT[EUT] EUT --- TS[Test System] </pre>
Test Setup
Test Frequency: centre Frequency Span: Max allowed to capture hole trace RBW: 300kHz VBW: =RBW Sweep Time: Auto Detector: Peak Trace: Max hold While the trace is stabilized, Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded. Mark lowest frequency FL of the 99% bandwidth and the highest Frequency FH of 99% bandwidth.
Verdict
Pass

5.4.1. Test Result

Refer to section 8 for details


5.5. Spurious Emission Intensity

Limit			
W52			
20MHz system		40MHz system	80MHz system
OBW : 18MHz or less	OBW : 18 - 20 MHz		
5,142 MHz or less : 2.5 μ W/MHz	5,142 MHz or less : 2.5 μ W/MHz	5,141.6 MHz or less : 2.5 μ W/MHz	5,123.2 MHz or less : 2.5 μ W/MHz
5,142 - 5,150 MHz : 15 μ W/MHz	5,142 - 5,150 MHz : 15 μ W/MHz	5,141.6 - 5,150 MHz : 15 μ W/MHz	5,123.2 - 5,150 MHz : 15 μ W/MHz
5,250 - 5,251 MHz : $10^{1-(9/50)(f-513)}$ mW/MHz	5,250 - 5,250.2 MHz : $10^{1-(9/50)(f-513)}$ mW/MHz	5,250 - 5,251 MHz : $10^{-(f-520)+\log(1/2)}$ mW/MHz	5,250 - 5,251 MHz : $10^{-(f-40)+\log(1/4)}$ mW/MHz
5,251 - 5,250 MHz : $10^{-1-(9/50)(f-513)}$ mW/MHz	5,251 - 5,250 MHz : $10^{-1-(9/50)(f-513)}$ mW/MHz	5,251 - 5,270 MHz : $10^{-(9/100)(f-513)-1+\log(1/2)}$ mW/MHz	5,251 - 5,250 MHz : $10^{-(9/100)(f-413)-1+\log(1/4)}$ mW/MHz
5,250 - 5,255.7 MHz : $10^{-1.8-(9/50)(f-520)}$ mW/MHz	5,250 - 5,255.7 MHz : $10^{-1.8-(9/50)(f-520)}$ mW/MHz	5,270 - 5,278.4 MHz : $10^{-(3/50)(f-40)-1.8+\log(1/2)}$ mW/MHz	5,250 - 5,255.7 MHz : $10^{-(3/100)(f-40)-1.8+\log(1/4)}$ mW/MHz
5,255.7 MHz or more : 2.5 μ W/MHz	5,255.7 MHz or more : 2.5 μ W/MHz	5,278.4 MHz or more : 2.5 μ W/MHz	5,255.7 MHz or more : 2.5 μ W/MHz
f = MHz, Difference from 5240 (MHz)	f = MHz, Difference from 5240 (MHz)	f = MHz, Difference from 5230 (MHz)	f = MHz, Difference from 5210 (MHz)
W53			
20MHz system		40MHz system	80MHz system
OBW : 18MHz or less	OBW : 18 - 20 MHz		
5,233.3 MHz or less : 2.5 μ W/MHz	5,233.3 MHz or less : 2.5 μ W/MHz	5,221.6 MHz or less : 2.5 μ W/MHz	5,203.3 MHz or less : 2.5 μ W/MHz
5,233.3 - 5,240 MHz : $10^{-1.8-(9/50)(f-20)}$ mW/MHz	5,233.3 - 5,240 MHz : $10^{-1.8-(9/50)(f-20)}$ mW/MHz	5,221.6 - 5,230 MHz : $10^{-(3/50)(f-40)-1.8+\log(1/2)}$ mW/MHz	5,203.3 - 5,210 MHz : $10^{-(3/100)(f-40)-1.8+\log(1/4)}$ mW/MHz
5,240 - 5,249 MHz : $10^{-1-(9/50)(f-513)}$ mW/MHz	5,240 - 5,249 MHz : $10^{-1-(9/50)(f-513)}$ mW/MHz	5,230 - 5,249 MHz : $10^{-(9/100)(f-513)-1+\log(1/4)}$ mW/MHz	5,210 - 5,249 MHz : $10^{-(9/100)(f-413)-1+\log(1/4)}$ mW/MHz
5,249 - 5,250 MHz : $10^{1-(f-9)}$ mW/MHz	5,249 - 5,249.8 MHz : $10^{1-(f-9)}$ mW/MHz	5,249 - 5,250 MHz : $10^{-(f-20)+\log(1/2)}$ mW/MHz	5,249 - 5,250 MHz : $10^{-(f-40)+\log(1/4)}$ mW/MHz
5,350 MHz or more : 2.5 μ W/MHz	5,249.8 - 5,250 MHz : $10^{1-(9/50)(f-9.75)}$ mW/MHz	5,350 - 5,358.4 MHz : 15 μ W/MHz	5,350 - 5,370.8 MHz : 15 μ W/MHz
f = MHz, Difference from 5250 (MHz)	f = MHz, Difference from 5250 (MHz)	f = MHz, Difference from 5270 (MHz)	f = MHz, Difference from 5290 (MHz)
Block diagram of Test Setup			
<pre> graph TD PS[Power Supply] --- EUT[EUT] EUT --- TS[Test System] </pre>			
Test Setup			
Analyser frequency set to the wanted transmitting frequency Frequency Range: 30MHz ~ 26GHz RBW: 100 kHz<1GHz; 1MHz>1GHz VBW:=RBW Sweep time: Auto Detector: Peak Trace: Max Hold Allow the trace to stabilize. Use mark-peak function to mark the highest emission level.			
Verdict			
Pass			

5.5.1. Test Result

Refer to section 8 for details


5.6. Second Radiated Emission

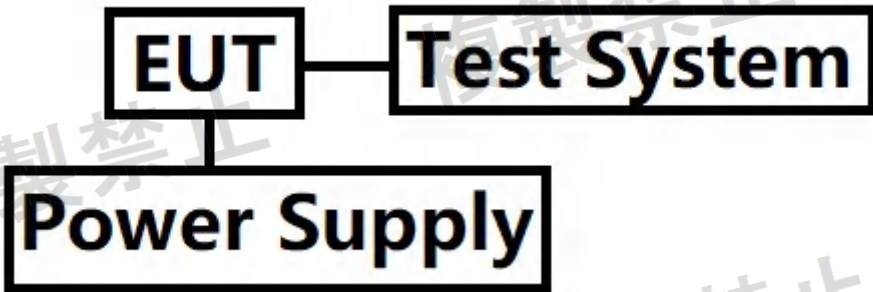Limit
4nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher
Block diagram of Test Setup
 <pre> graph TD PS[Power Supply] --- EUT[EUT] EUT --- TS[Test System] </pre>
Test Setup
Analyser frequency set to the wanted transmitting frequency Frequency Range: 30MHz ~ 26GHz RBW: 100 kHz < 1GHz; 1MHz > 1GHz VBW: =RBW Sweep time: Auto Detector: Peak Trace: Max Hold Allow the trace to stabilize. Use mark-peak function to mark the highest emission level.
Verdict
Pass

5.6.1. Test Result

Refer to section 8 for details

5.7. Burst Length

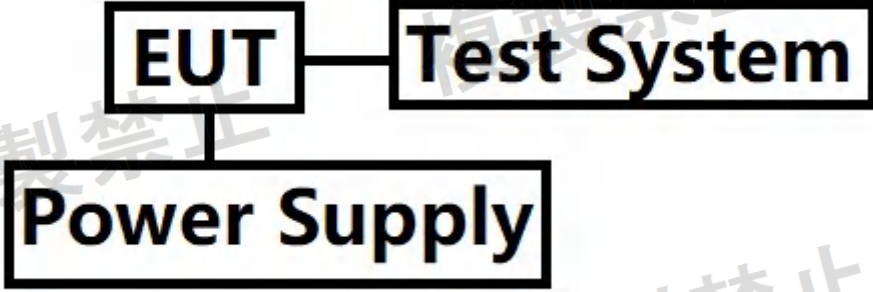Limit
≤8ms
Block diagram of Test Setup
 <pre> graph LR PS[Power Supply] --> EUT[EUT] EUT --- TS[Test System] </pre>
Test Setup
Analyser frequency set to the wanted transmitting frequency Test Frequency: Centre Frequency RBW: 8MHz VBW: =RBW Span: 0MHz Sweep time: Auto Detector: Peak Trace: Clear Sweep: Single
Verdict
Pass

5.7.1. Test Result

Refer to section 8 for details

5.8. Adjacent Channel Leakage Power

Limit

For OFDM, $OBW \leq 20\text{MHz}$

$\geq -25\text{dBc}$, $f_c \pm 20\text{MHz} \pm 10\text{MHz}$

$\geq -40\text{dBc}$, $f_c \pm 40\text{MHz} \pm 10\text{MHz}$

For OFDM, $20 \leq OBW \leq 40\text{MHz}$


$\geq -25\text{dBc}$, $f_c \pm 40\text{MHz} \pm 20\text{MHz}$

$\geq -40\text{dBc}$, $f_c \pm 80\text{MHz} \pm 20\text{MHz}$

For OFDM, $40 \leq OBW \leq 80\text{MHz}$

$\geq -25\text{dBc}$, $f_c \pm 80\text{MHz} \pm 40\text{MHz}$

Block diagram of Test Setup

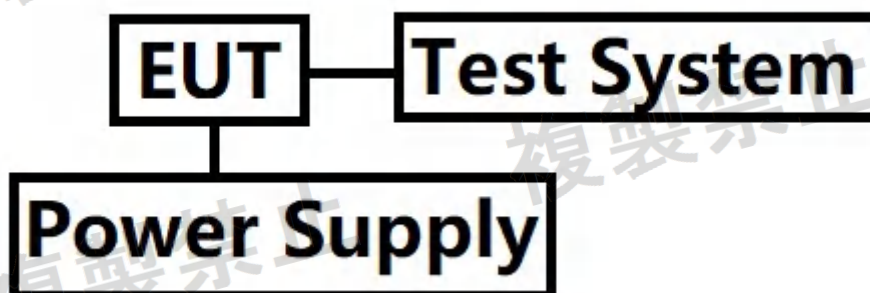

Test Setup

Analyser frequency set to the wanted transmitting frequency

Test Frequency: Centre Frequency

Span: Wide enough to capture whole trace

RBW: 300 kHz

VBW: =RBW

Sweep time: Auto

Detector: Peak

Trace: Max Hold

Allow the trace to stabilize.

Verdict

Pass

5.8.1. Test Result

Refer to section 8 for details

5.9. Interference Prevention Function

Limit		
a. Identification code transmission/reception: Radio equipment used mainly on the same premises and automatically transmits or receives identification code b. Frequency switching and other functions: Users shall be able to choose operating frequencies and halt emission.		
Block diagram of Test Setup		
	Radio equipment	Dummy load Attenuator
Verdict		
Pass		

5.9.1. Test Result

WLAN MAC Address: 20:BD:1D:2A:C7:3B

5.10. Carrier Sense Capability


Limit

Stop transmission for interference signal level above 100mV/m (or level at $22.79 + Gr - 20 \cdot \log(f)$ [dBm])

f: indicated frequency in MHz

Gr: indicated the antenna gain in dBi

Block diagram of Test Setup

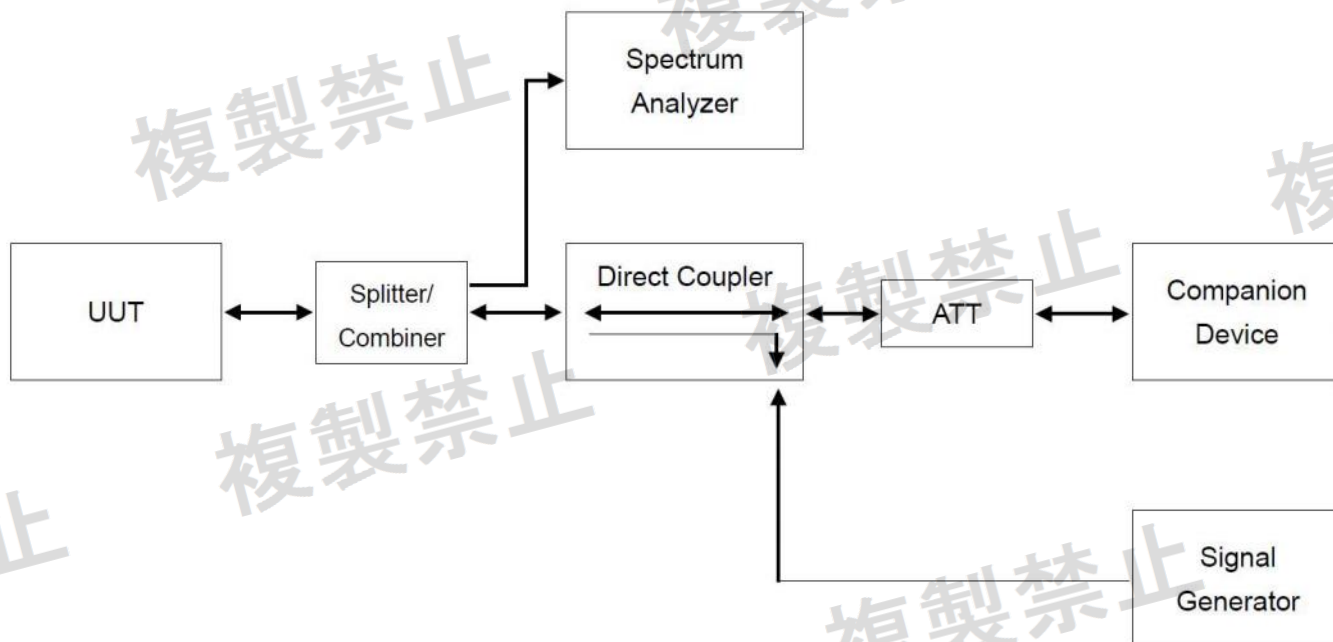

Test Procedures

1. SG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SG. Then turn off the RF signal of SG.
2. EUT have transmitted the maximum modulation signal and fixed channelize.
3. Set the Spectrum per the above form.
4. SG RF signal on, and adjust the signal level until the EUT stop transmission at the tested frequency. Record the signal level.
5. EUT shall be stop the transmission and SG RF signal off. Then EUT will be continuously transmitted signal.

Verdict

Pass, only worst case report.

5.10.1. Test Result

Type	Test Frequency(MHz)	Result
802.11ax(HT80)	5210	Acceptance

6. Test setup photo

Refer to appendix I for details

7. Photo of the EUT

Refer to appendix II for details


8. Test Result

1. Frequency Error


1.1 Test Result

Ant1							
ENV	Mode	TX Type	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (ppm)		Verdict
					Result	Limit	
NTNV	Carrier Wave	SISO	5180	5179.965	-6.76	-20 to 20	Pass
			5200	5200.015	2.88	-20 to 20	Pass
			5240	5239.988	-2.29	-20 to 20	Pass
			5260	5259.988	-2.28	-20 to 20	Pass
			5300	5299.966	-6.42	-20 to 20	Pass
			5320	5319.965	-6.58	-20 to 20	Pass
			5500	5499.988	-2.18	-20 to 20	Pass
			5600	5600.105	18.75	-20 to 20	Pass
			5700	5699.978	-3.86	-20 to 20	Pass
			5190	5190.015	2.89	-20 to 20	Pass
			5230	5229.966	-6.50	-20 to 20	Pass
			5270	5269.986	-2.66	-20 to 20	Pass
			5310	5309.959	-7.72	-20 to 20	Pass
			5510	5510.035	6.35	-20 to 20	Pass
			5590	5590.034	6.08	-20 to 20	Pass
			5670	5670.098	17.28	-20 to 20	Pass
			5210	5209.938	-11.90	-20 to 20	Pass
			5290	5289.955	-8.51	-20 to 20	Pass
			5530	5529.987	-2.35	-20 to 20	Pass
			5610	5609.968	-5.70	-20 to 20	Pass


1.2 Test Graph

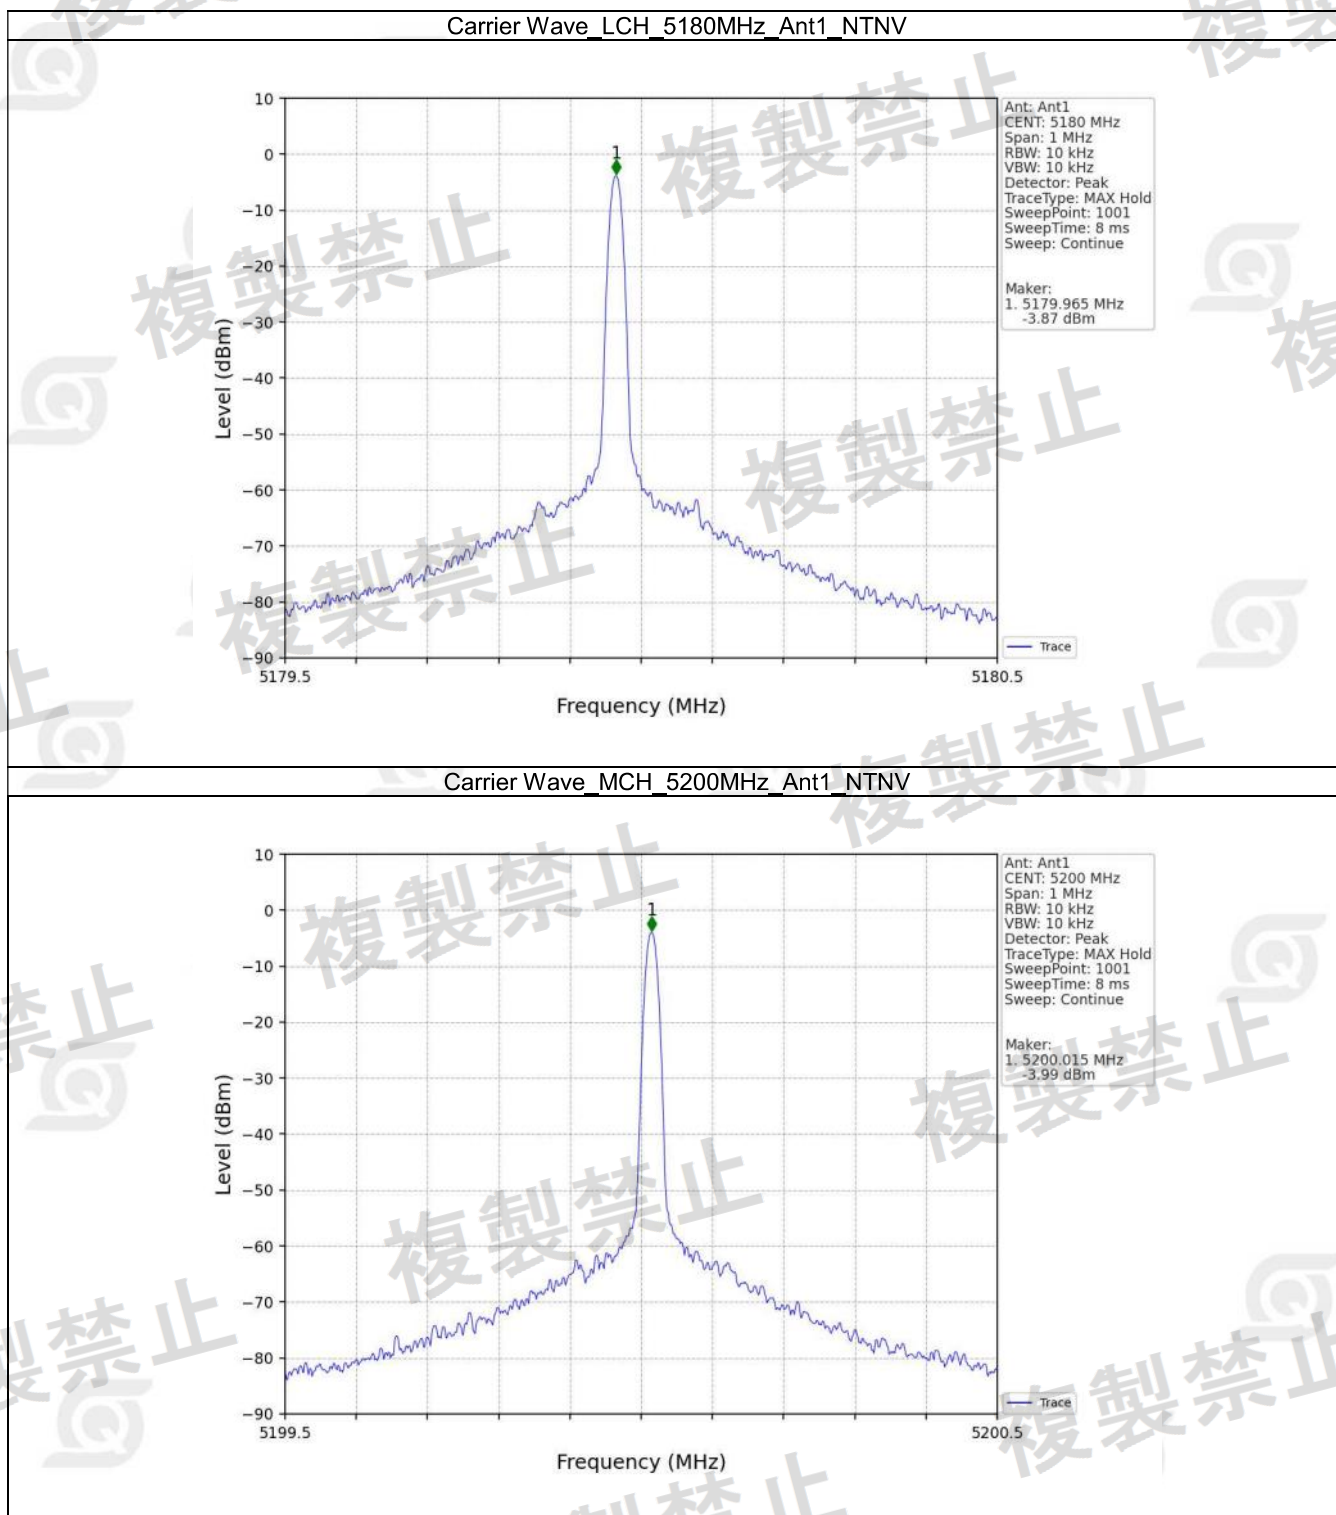


Carrier Wave HCH 5240MHz Ant1 NTV

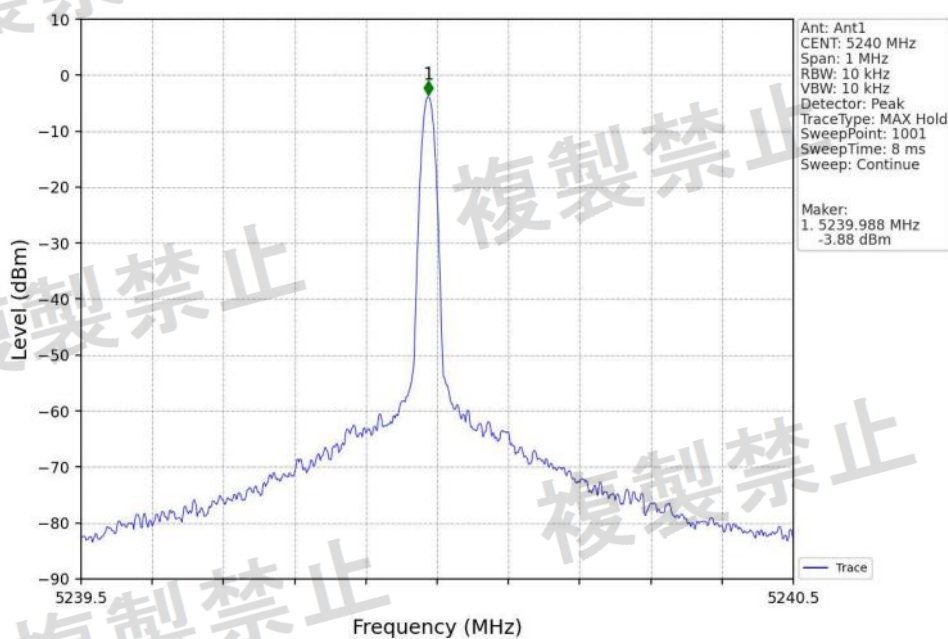


Carrier Wave LCH 5260MHz Ant1 NTV

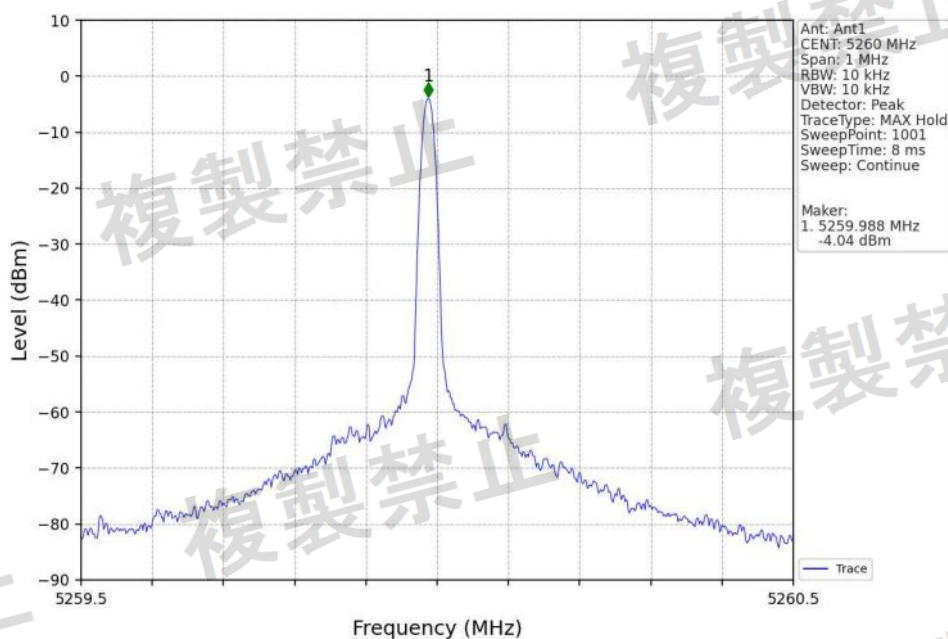


Carrier Wave MCH_5300MHz_Ant1_NTNV

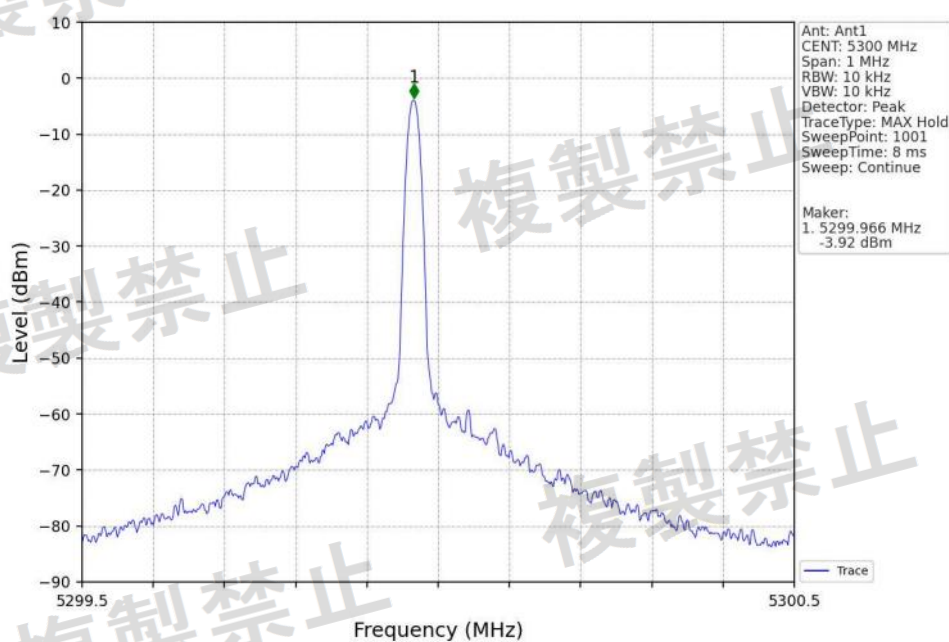


Carrier Wave HCH_5320MHz_Ant1_NTNV

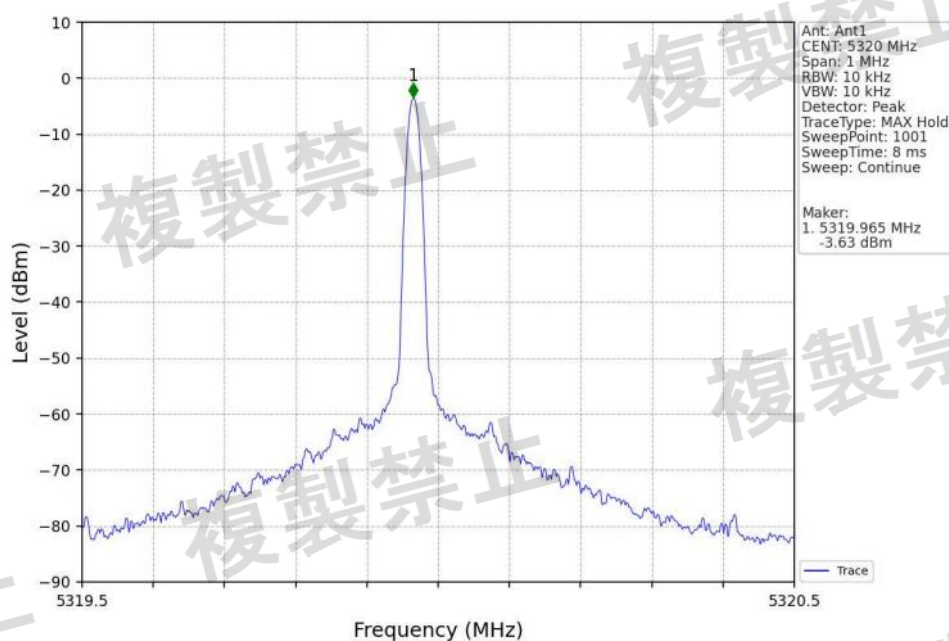


Carrier Wave LCH 5500MHz Ant1 NTN

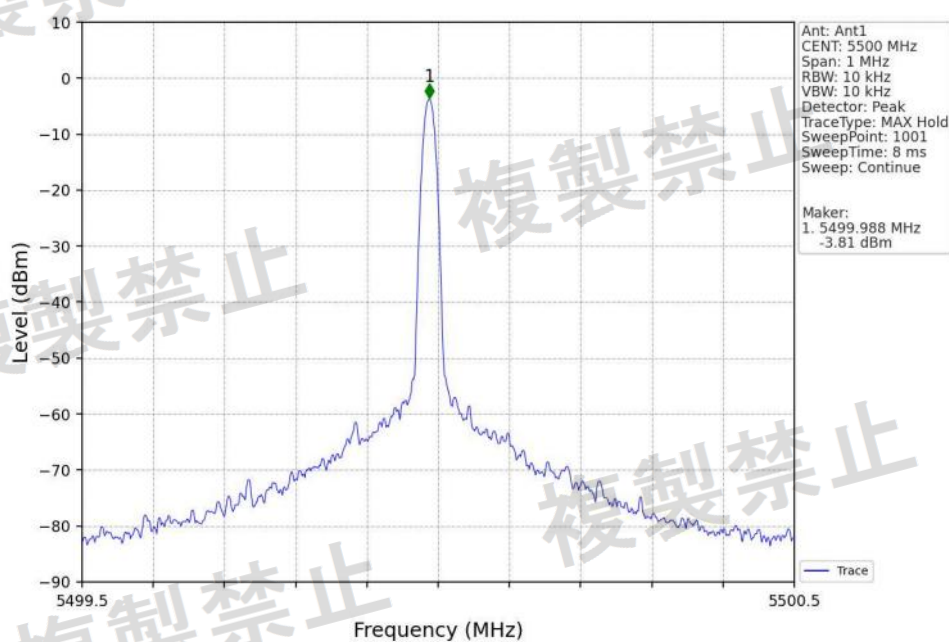


Carrier Wave MCH 5600MHz Ant1 NTN

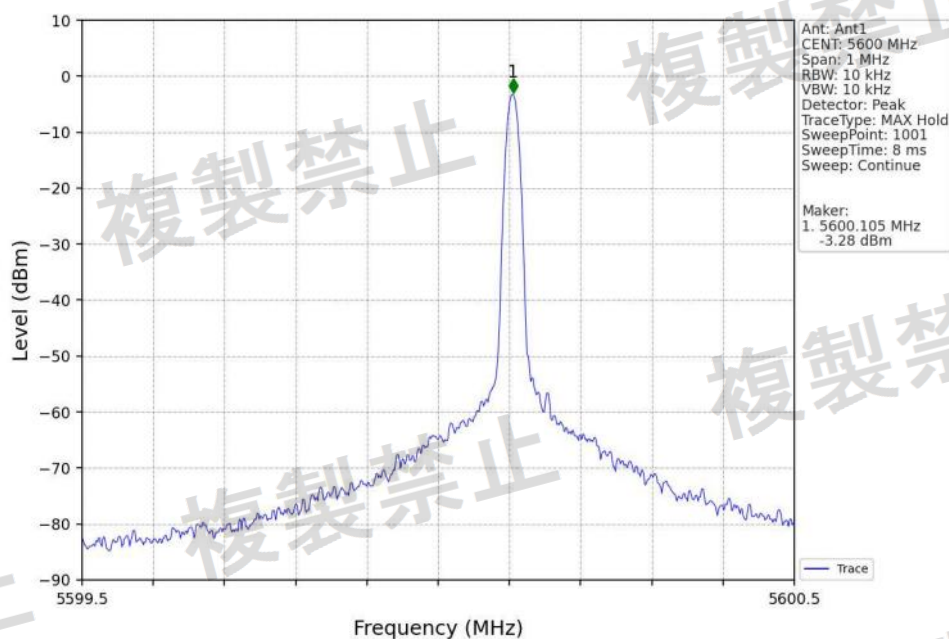


Carrier Wave HCH 5700MHz Ant1 NTV

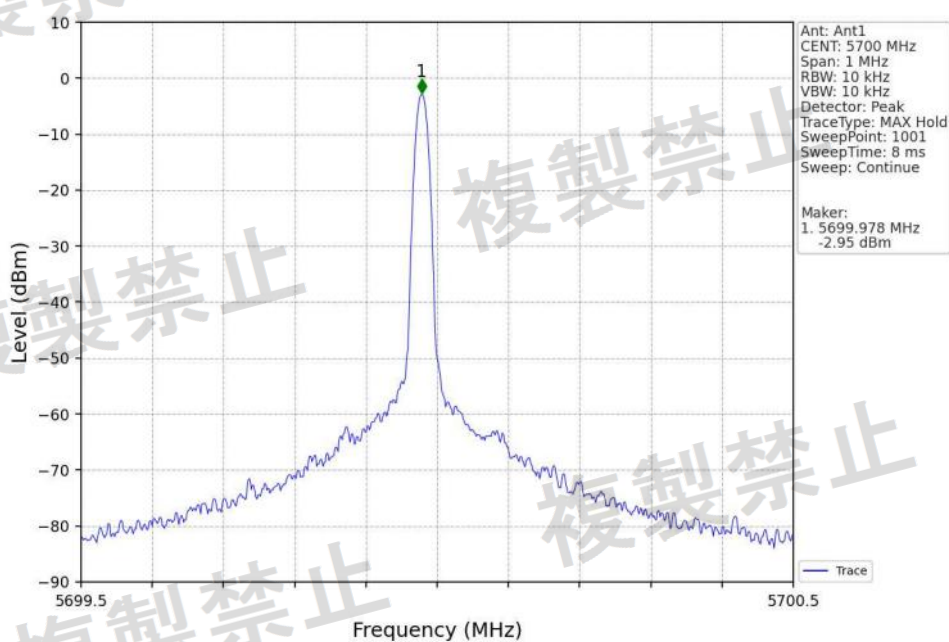


Carrier Wave LCH 5190MHz Ant1 NTV

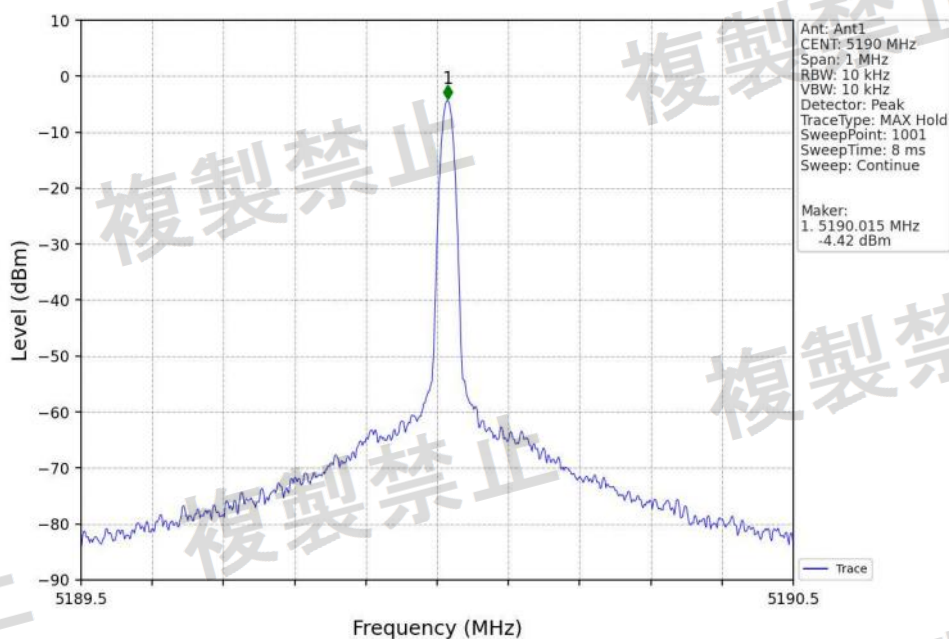


Carrier Wave HCH 5230MHz Ant1 NTV

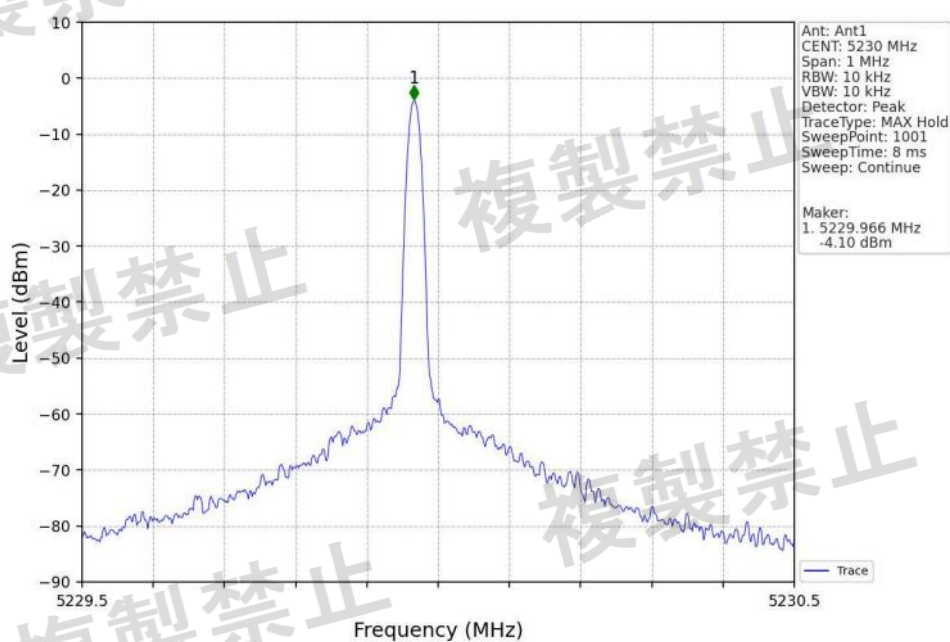


Carrier Wave LCH 5270MHz Ant1 NTV

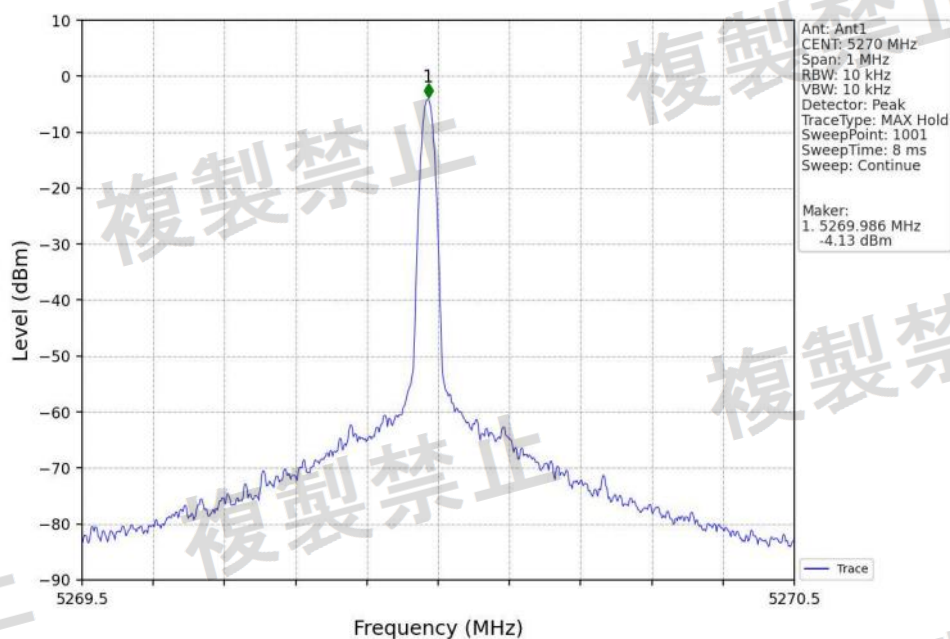


Carrier Wave HCH 5310MHz Ant1 NTV

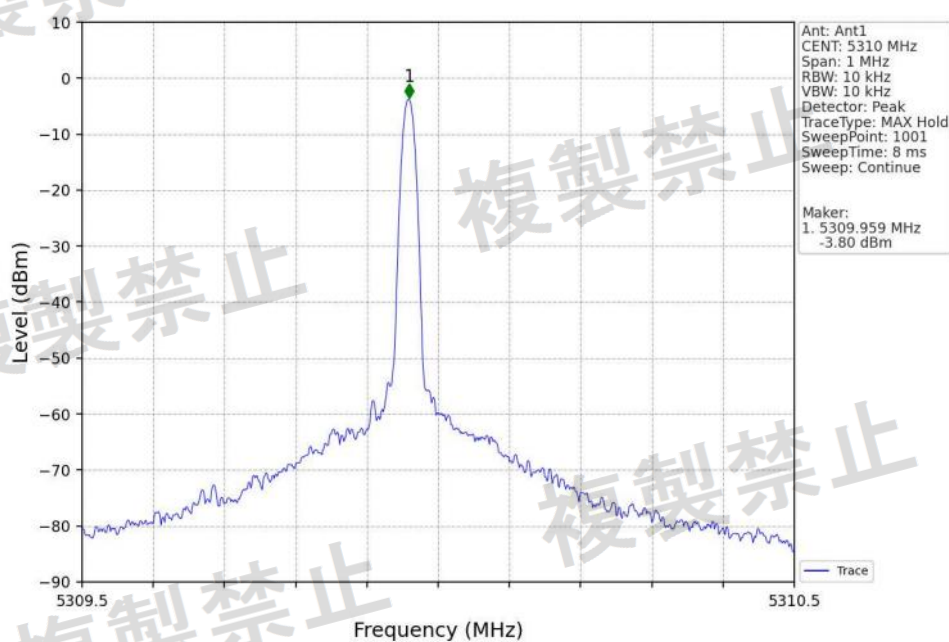


Carrier Wave LCH 5510MHz Ant1 NTV

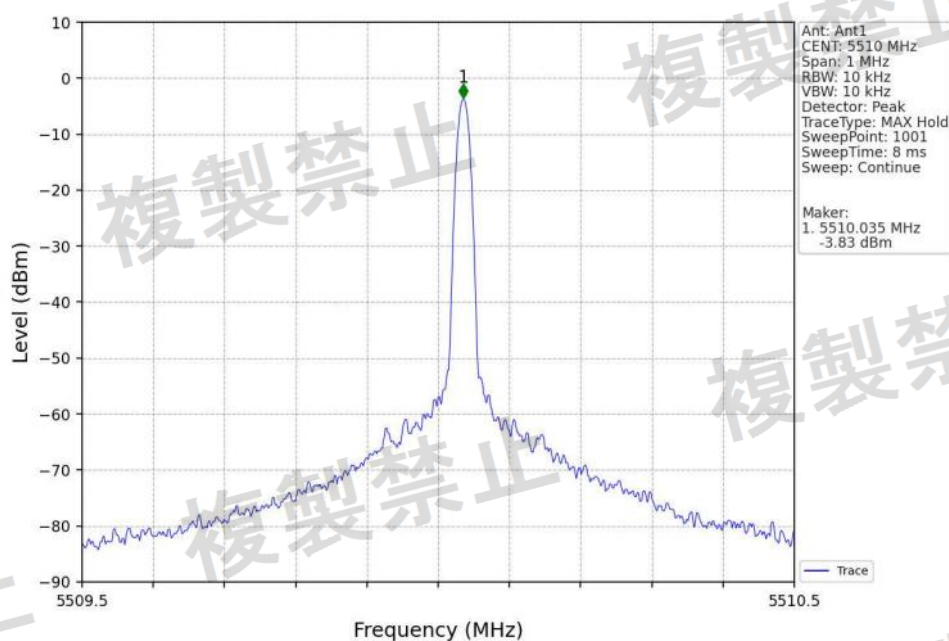


Carrier Wave MCH_5590MHz_Ant1_NTNV

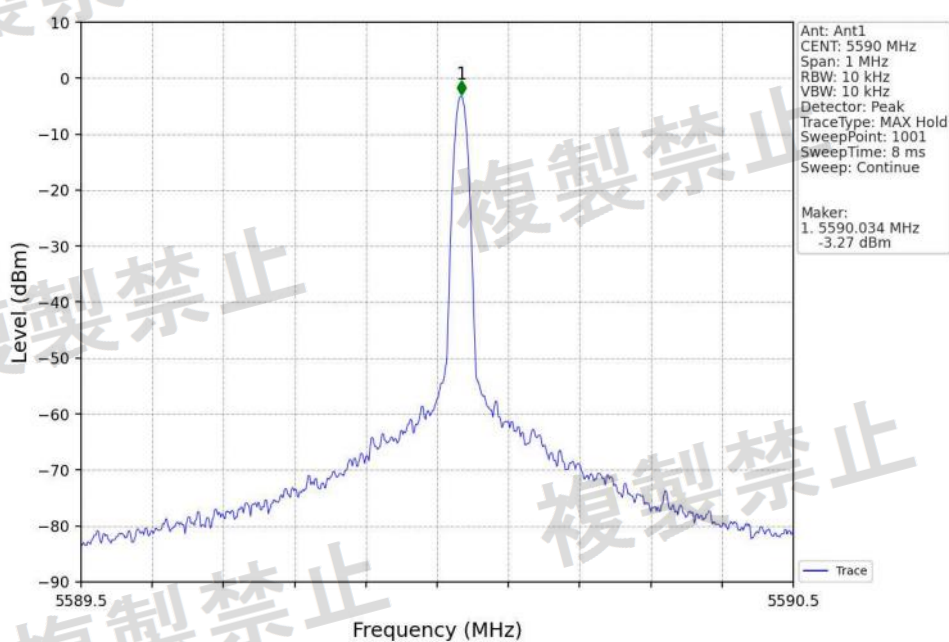


Carrier Wave HCH_5670MHz_Ant1_NTNV

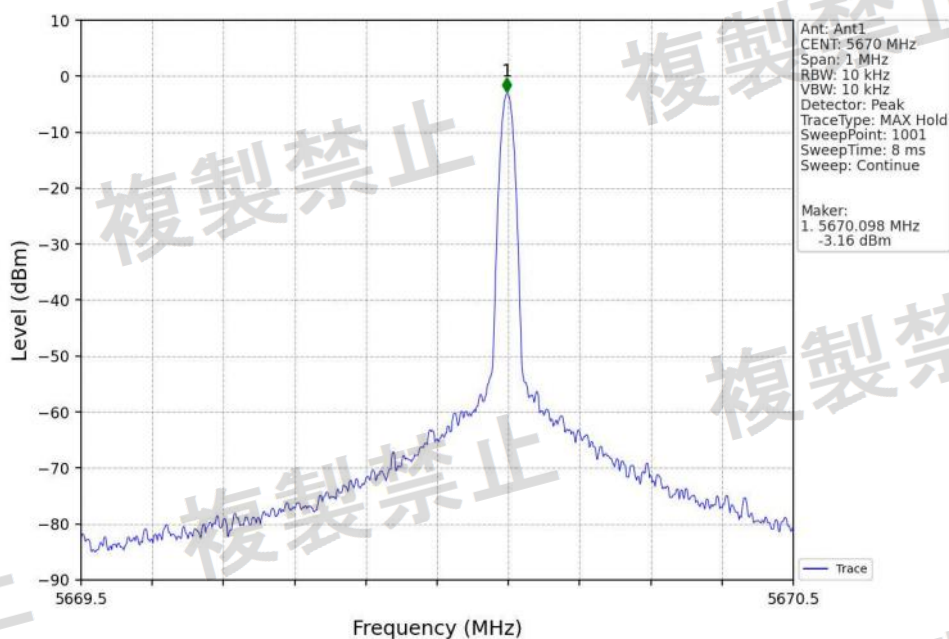


Carrier Wave_MCH_5210MHz_Ant1_NTNV

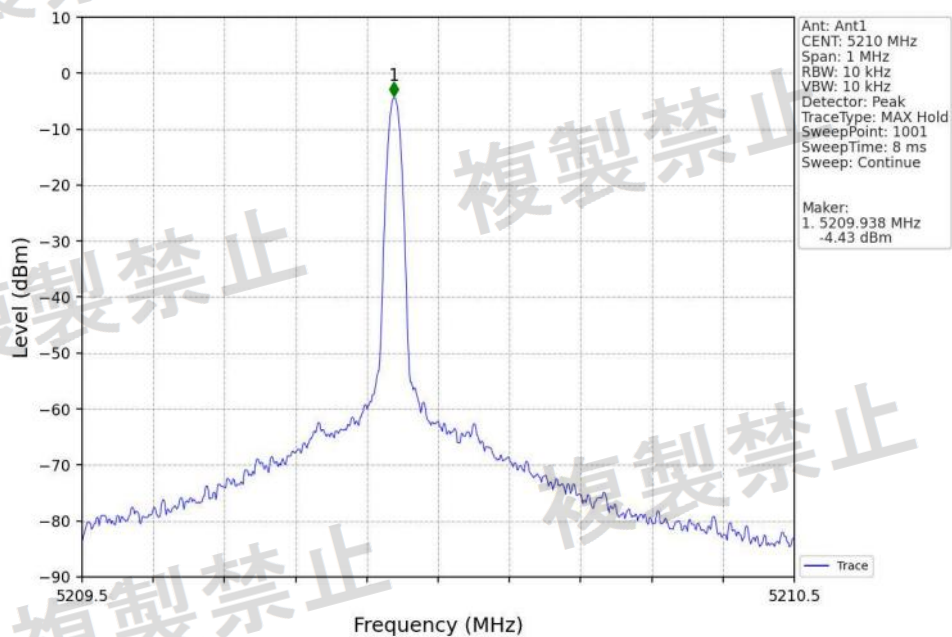


Carrier Wave_MCH_5290MHz_Ant1_NTNV

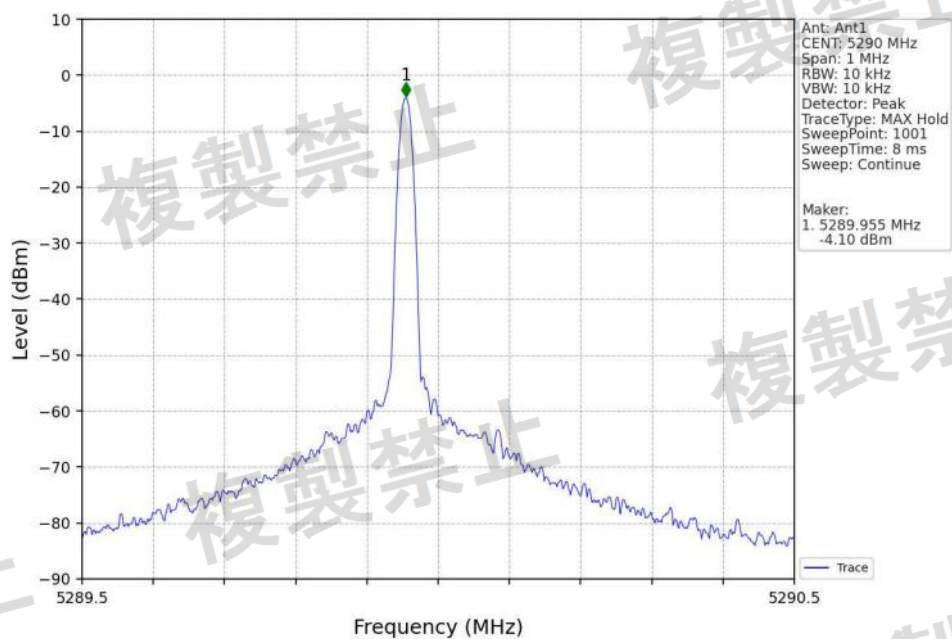

Carrier Wave LCH 5530MHz Ant1 NTN

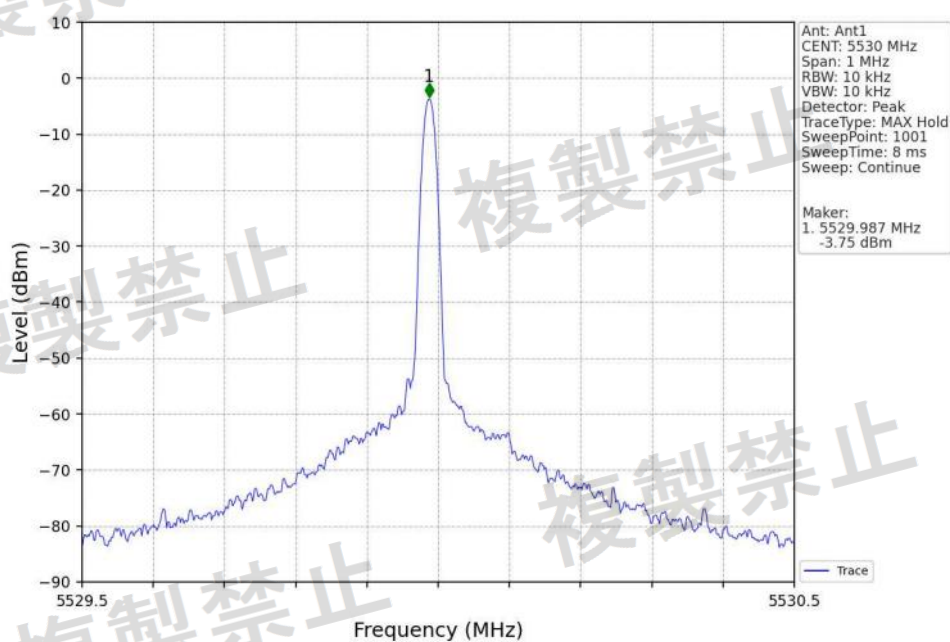

Carrier Wave HCH 5610MHz Ant1 NTN

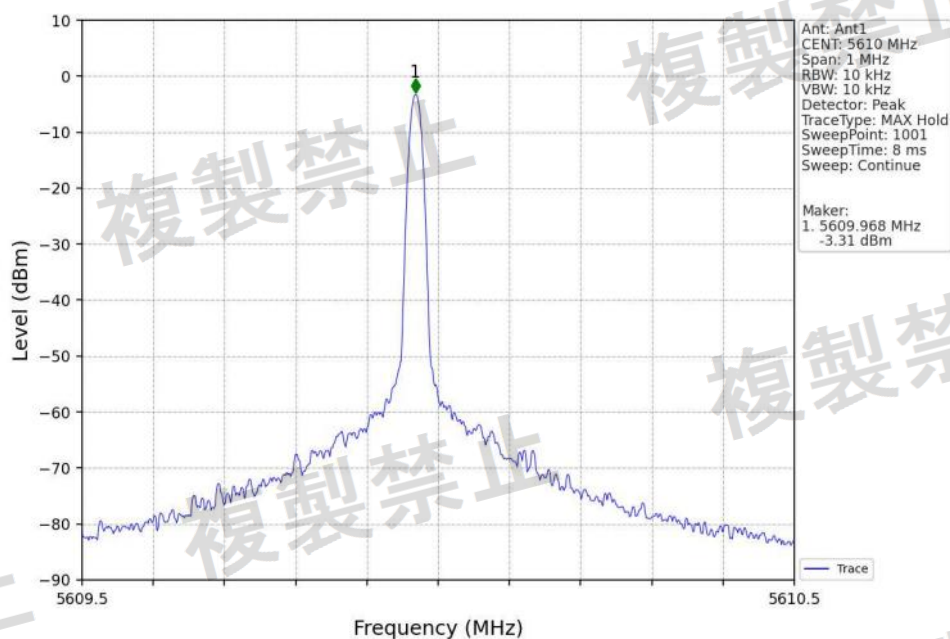


2. Occupied Bandwidth


2.1 Test Result


ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	99% Occupied Bandwidth (MHz)		Verdict
						ANT1	Limit	
NTNV	802.11a	SISO	5180	/	/	16.510	<=20	Pass
			5200	/	/	16.500	<=20	Pass
			5240	/	/	16.504	<=20	Pass
			5260	/	/	16.487	<=20	Pass
			5300	/	/	16.457	<=20	Pass
			5320	/	/	16.477	<=20	Pass
			5500	/	/	16.558	<=20	Pass
			5600	/	/	16.549	<=20	Pass
			5700	/	/	16.564	<=20	Pass
	802.11n (HT20)	SISO	5180	/	/	17.669	<=20	Pass
			5200	/	/	17.714	<=20	Pass
			5240	/	/	17.698	<=20	Pass
			5260	/	/	17.726	<=20	Pass
			5300	/	/	17.686	<=20	Pass
			5320	/	/	17.671	<=20	Pass
			5500	/	/	17.764	<=20	Pass
			5600	/	/	17.773	<=20	Pass
			5700	/	/	17.776	<=20	Pass
	802.11n (HT40)	SISO	5190	/	/	36.264	<=40	Pass
			5230	/	/	36.301	<=40	Pass
			5270	/	/	36.255	<=40	Pass
			5310	/	/	36.158	<=40	Pass
			5510	/	/	36.400	<=40	Pass
			5590	/	/	36.397	<=40	Pass
	802.11ac (VHT20)	SISO	5670	/	/	36.344	<=40	Pass
			5180	/	/	17.695	<=20	Pass
			5200	/	/	17.713	<=20	Pass
			5240	/	/	17.742	<=20	Pass
			5260	/	/	17.721	<=20	Pass
			5300	/	/	17.702	<=20	Pass
			5320	/	/	17.726	<=20	Pass
			5500	/	/	17.760	<=20	Pass
	802.11ac (VHT40)	SISO	5600	/	/	17.763	<=20	Pass
			5700	/	/	17.763	<=20	Pass
			5190	/	/	36.162	<=40	Pass
			5230	/	/	36.162	<=40	Pass
			5270	/	/	36.180	<=40	Pass
			5310	/	/	36.208	<=40	Pass
			5510	/	/	36.268	<=40	Pass
			5590	/	/	36.357	<=40	Pass
	802.11ac (VHT80)	SISO	5670	/	/	36.356	<=40	Pass
			5210	/	/	75.434	<=80	Pass
			5290	/	/	75.730	<=80	Pass
			5530	/	/	75.816	<=80	Pass
	802.11ax (HEW20)	SISO	5610	/	/	75.885	<=80	Pass
			5180	FU	/	18.975	<=20	Pass
			5200	FU	/	18.966	<=20	Pass
			5240	FU	/	18.997	<=20	Pass
			5260	FU	/	19.010	<=20	Pass
			5300	FU	/	19.015	<=20	Pass
			5320	FU	/	18.969	<=20	Pass
			5500	FU	/	19.053	<=20	Pass
	802.11ax	SISO	5600	FU	/	19.033	<=20	Pass
			5700	FU	/	19.069	<=20	Pass
			5190	FU	/	37.769	<=40	Pass


	(HEW40)		5230	FU	/	37.919	<=40	Pass
			5270	FU	/	37.966	<=40	Pass
			5310	FU	/	37.774	<=40	Pass
			5510	FU	/	37.839	<=40	Pass
			5590	FU	/	37.981	<=40	Pass
			5670	FU	/	37.926	<=40	Pass
	802.11ax (HEW80)	SISO	5210	FU	/	77.407	<=80	Pass
			5290	FU	/	77.182	<=80	Pass
			5530	FU	/	77.534	<=80	Pass
			5610	FU	/	77.531	<=80	Pass


2.2 Test Graph

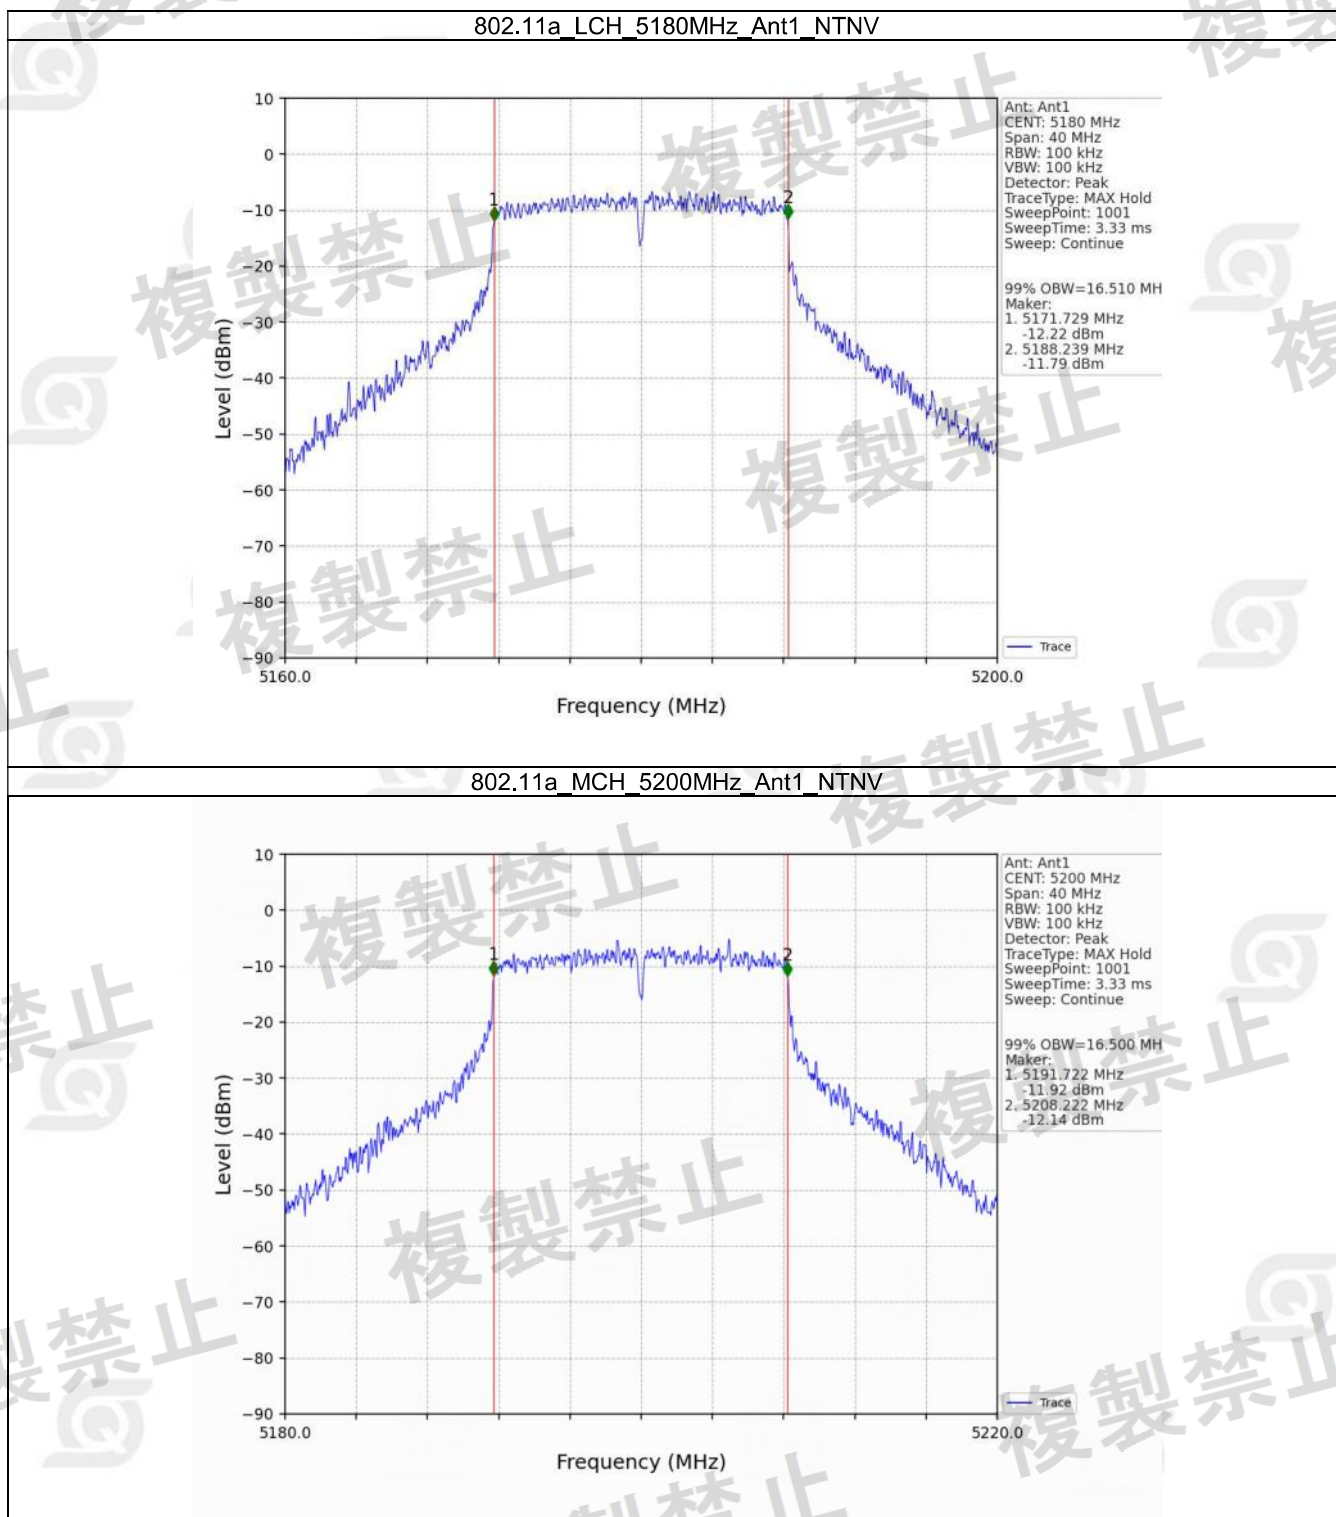

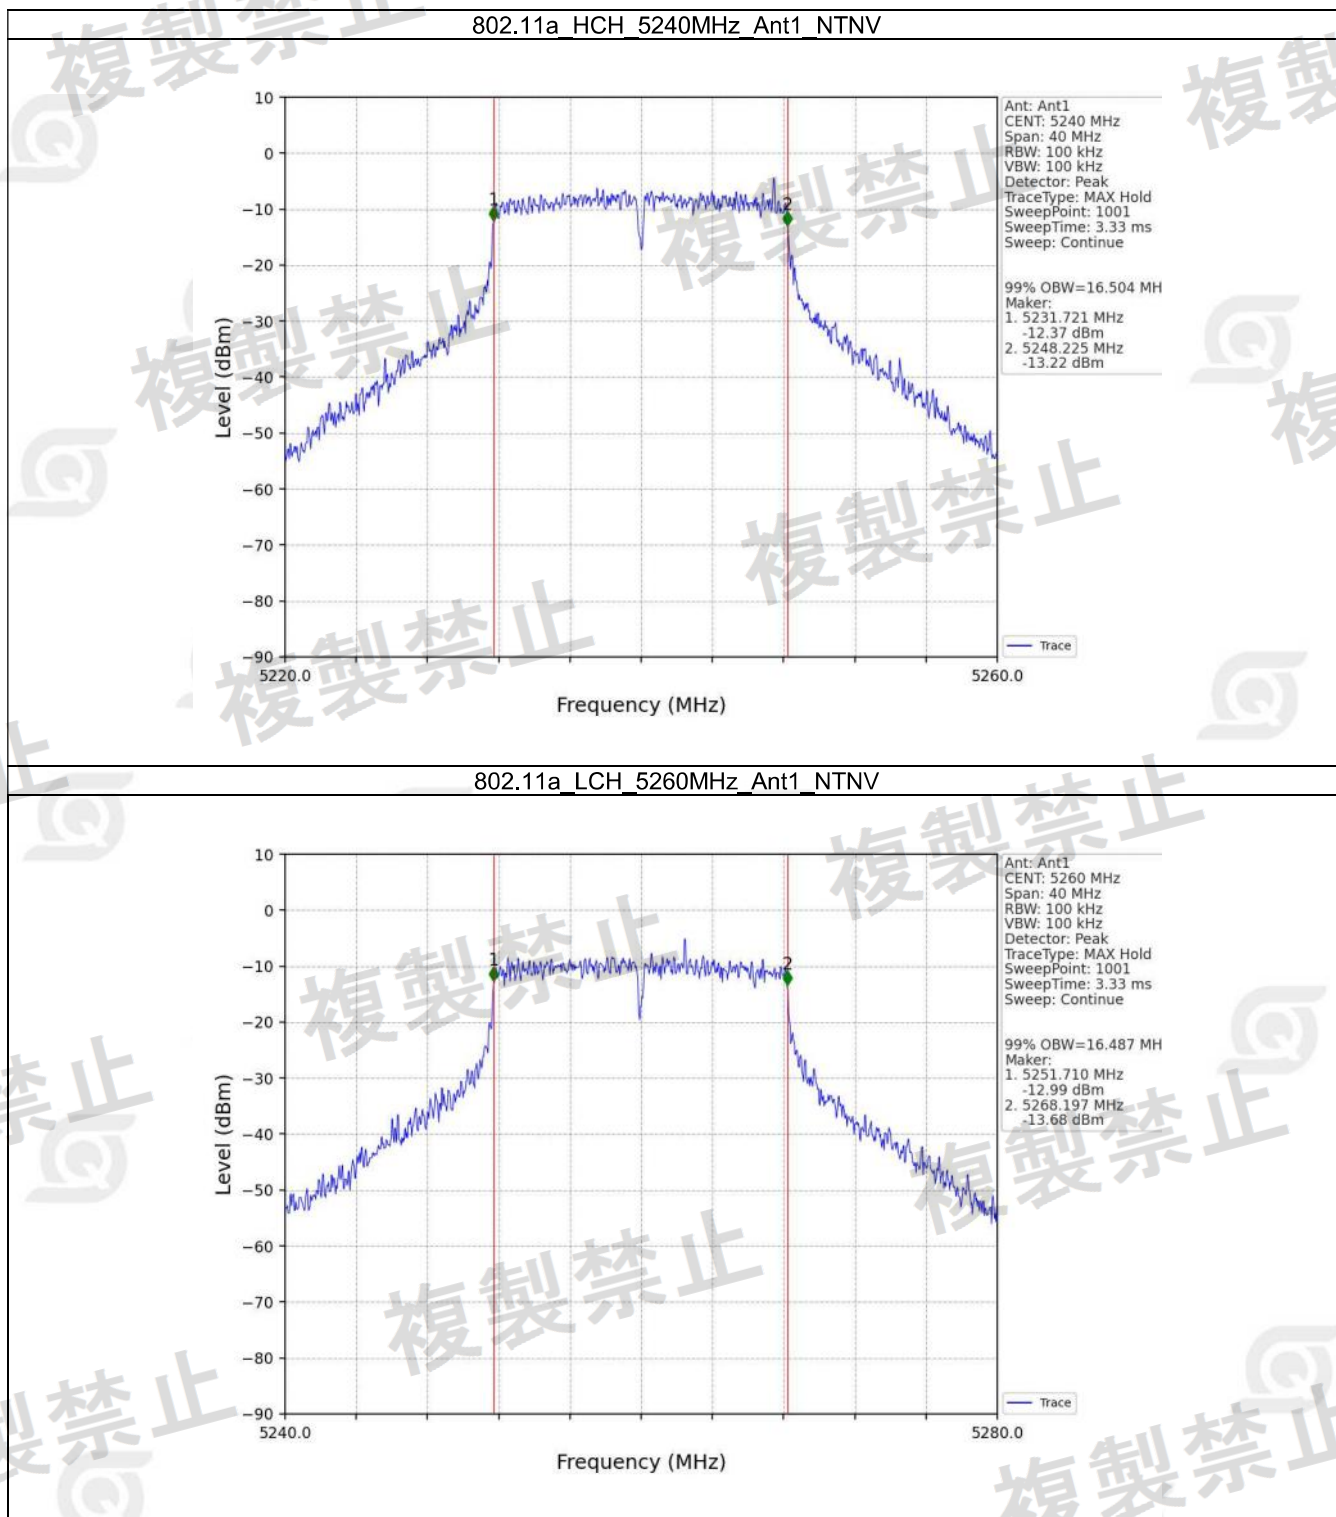


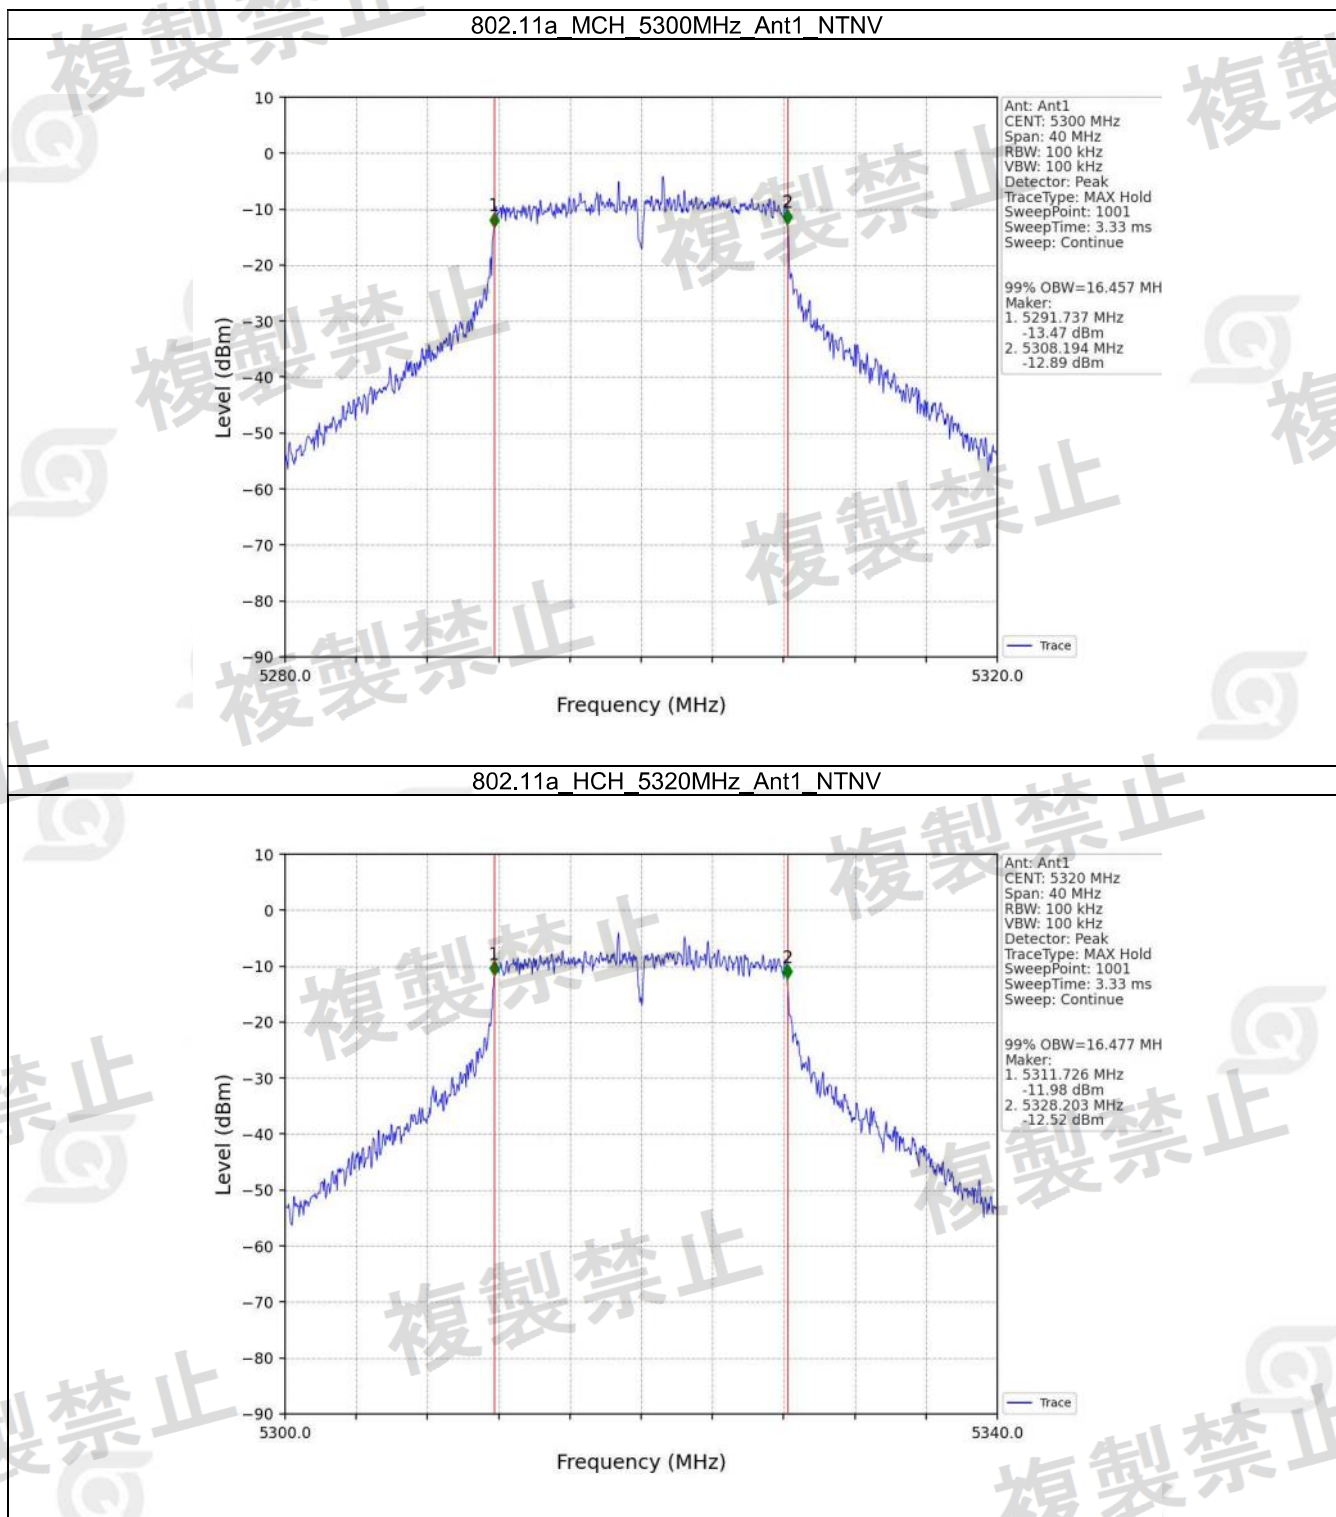

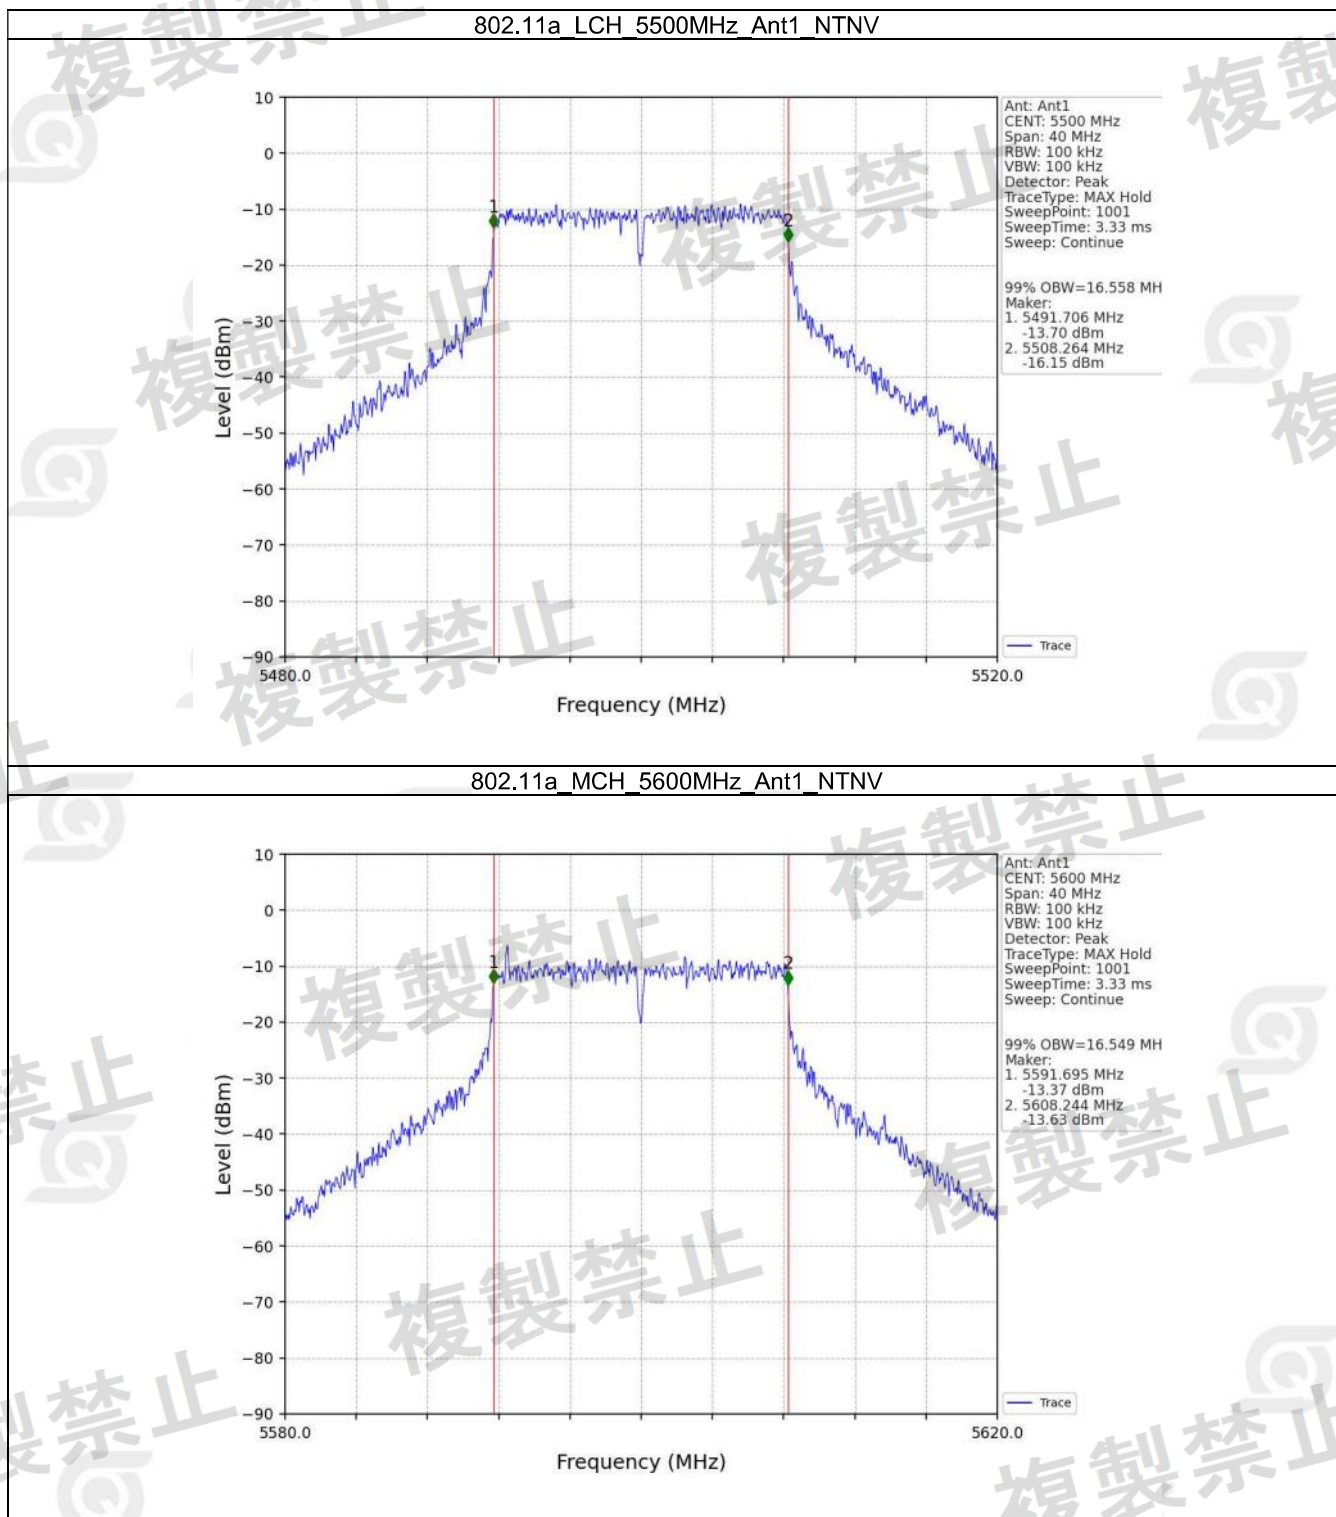


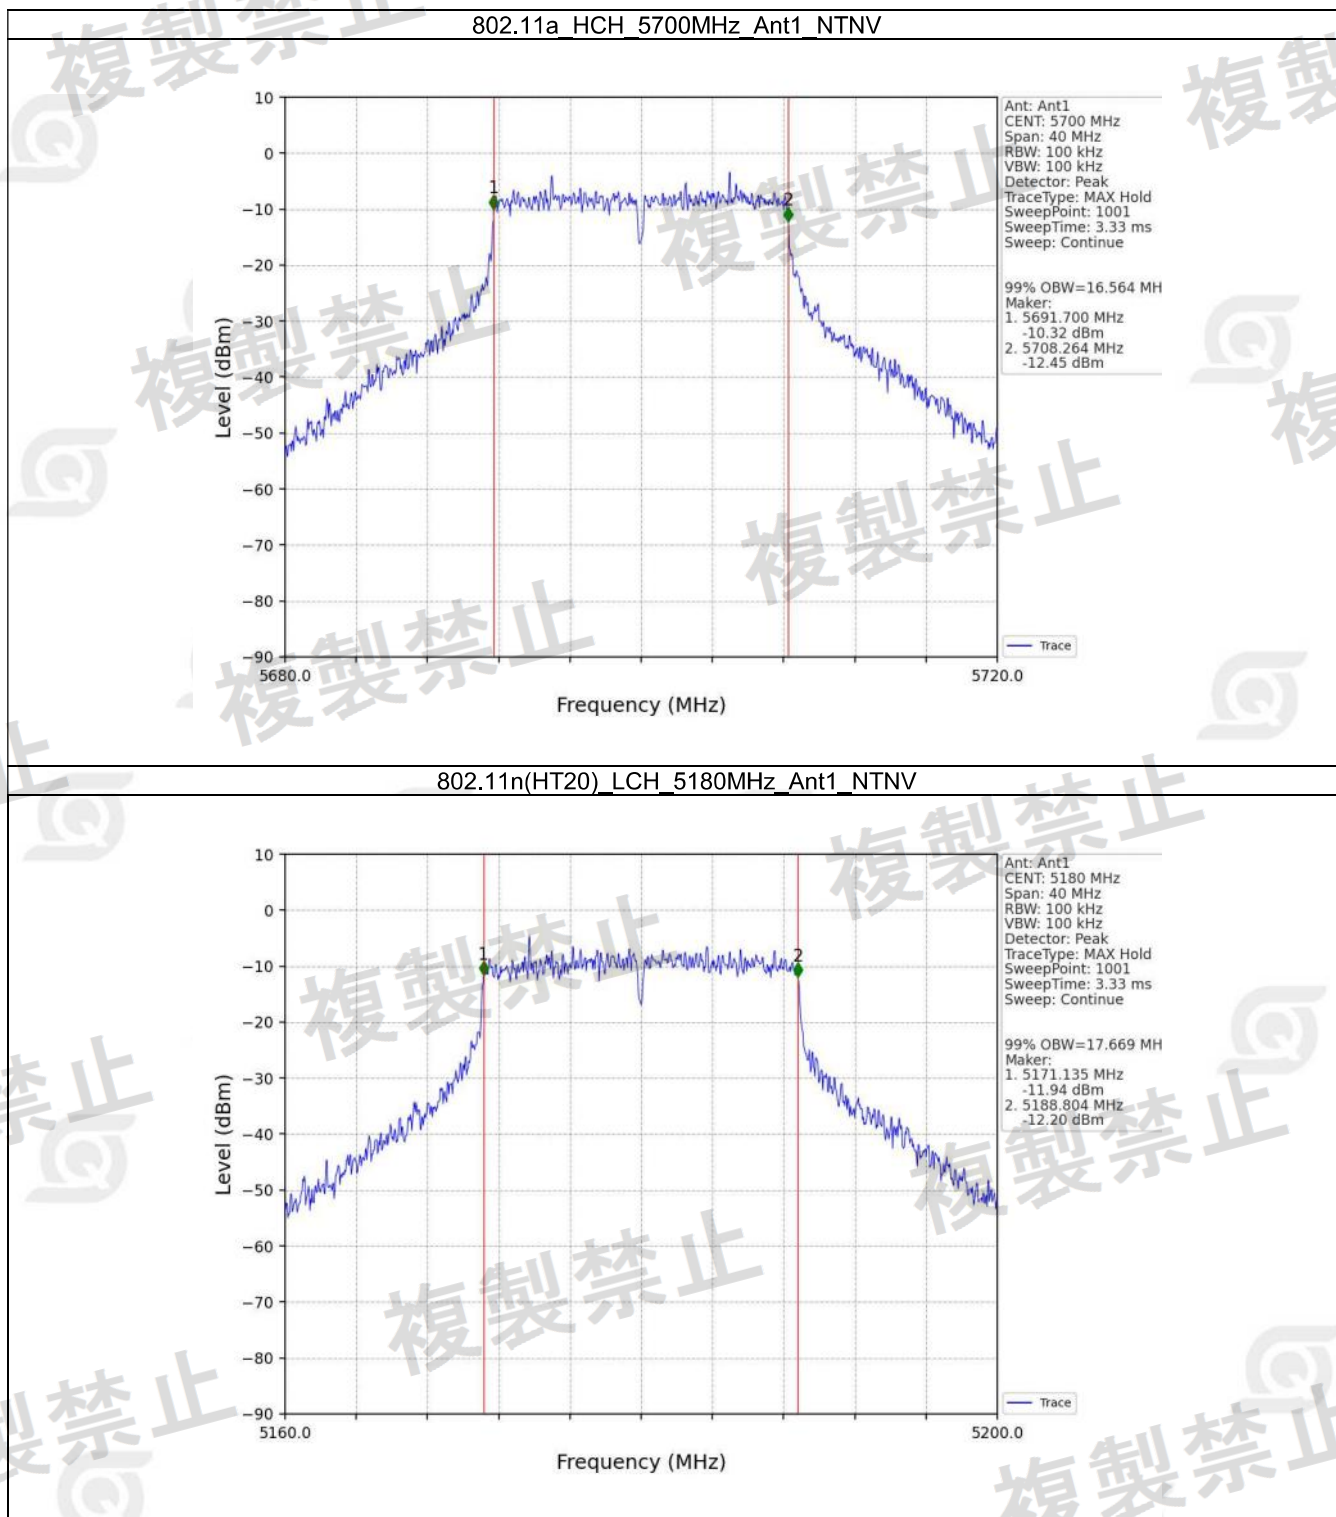



802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

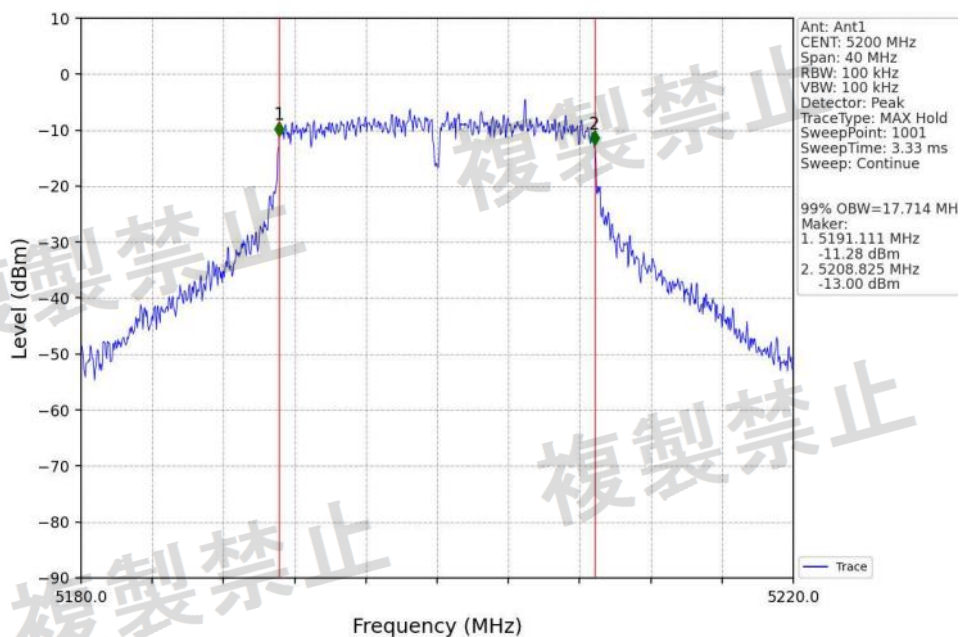



802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

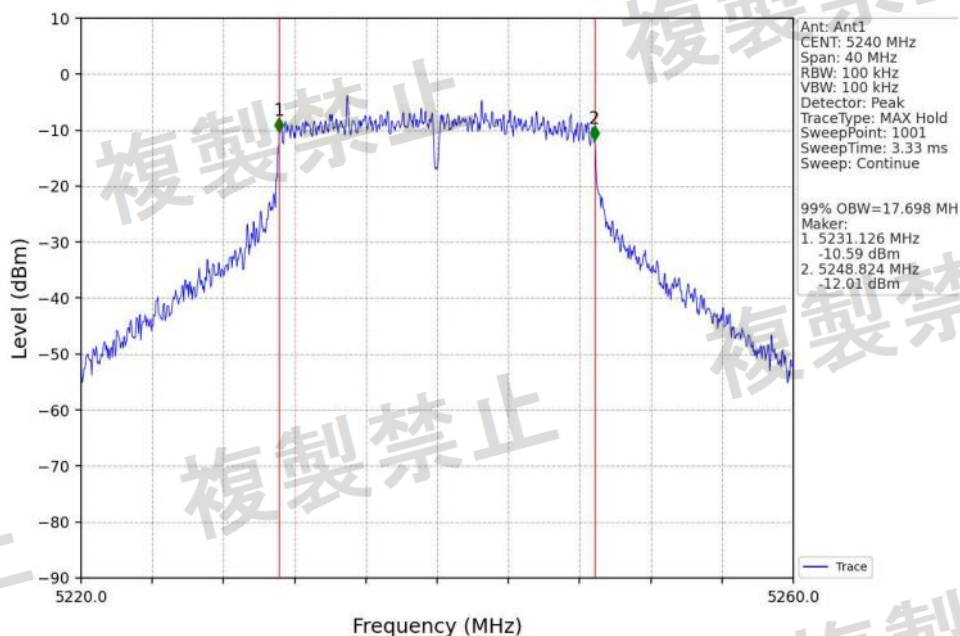


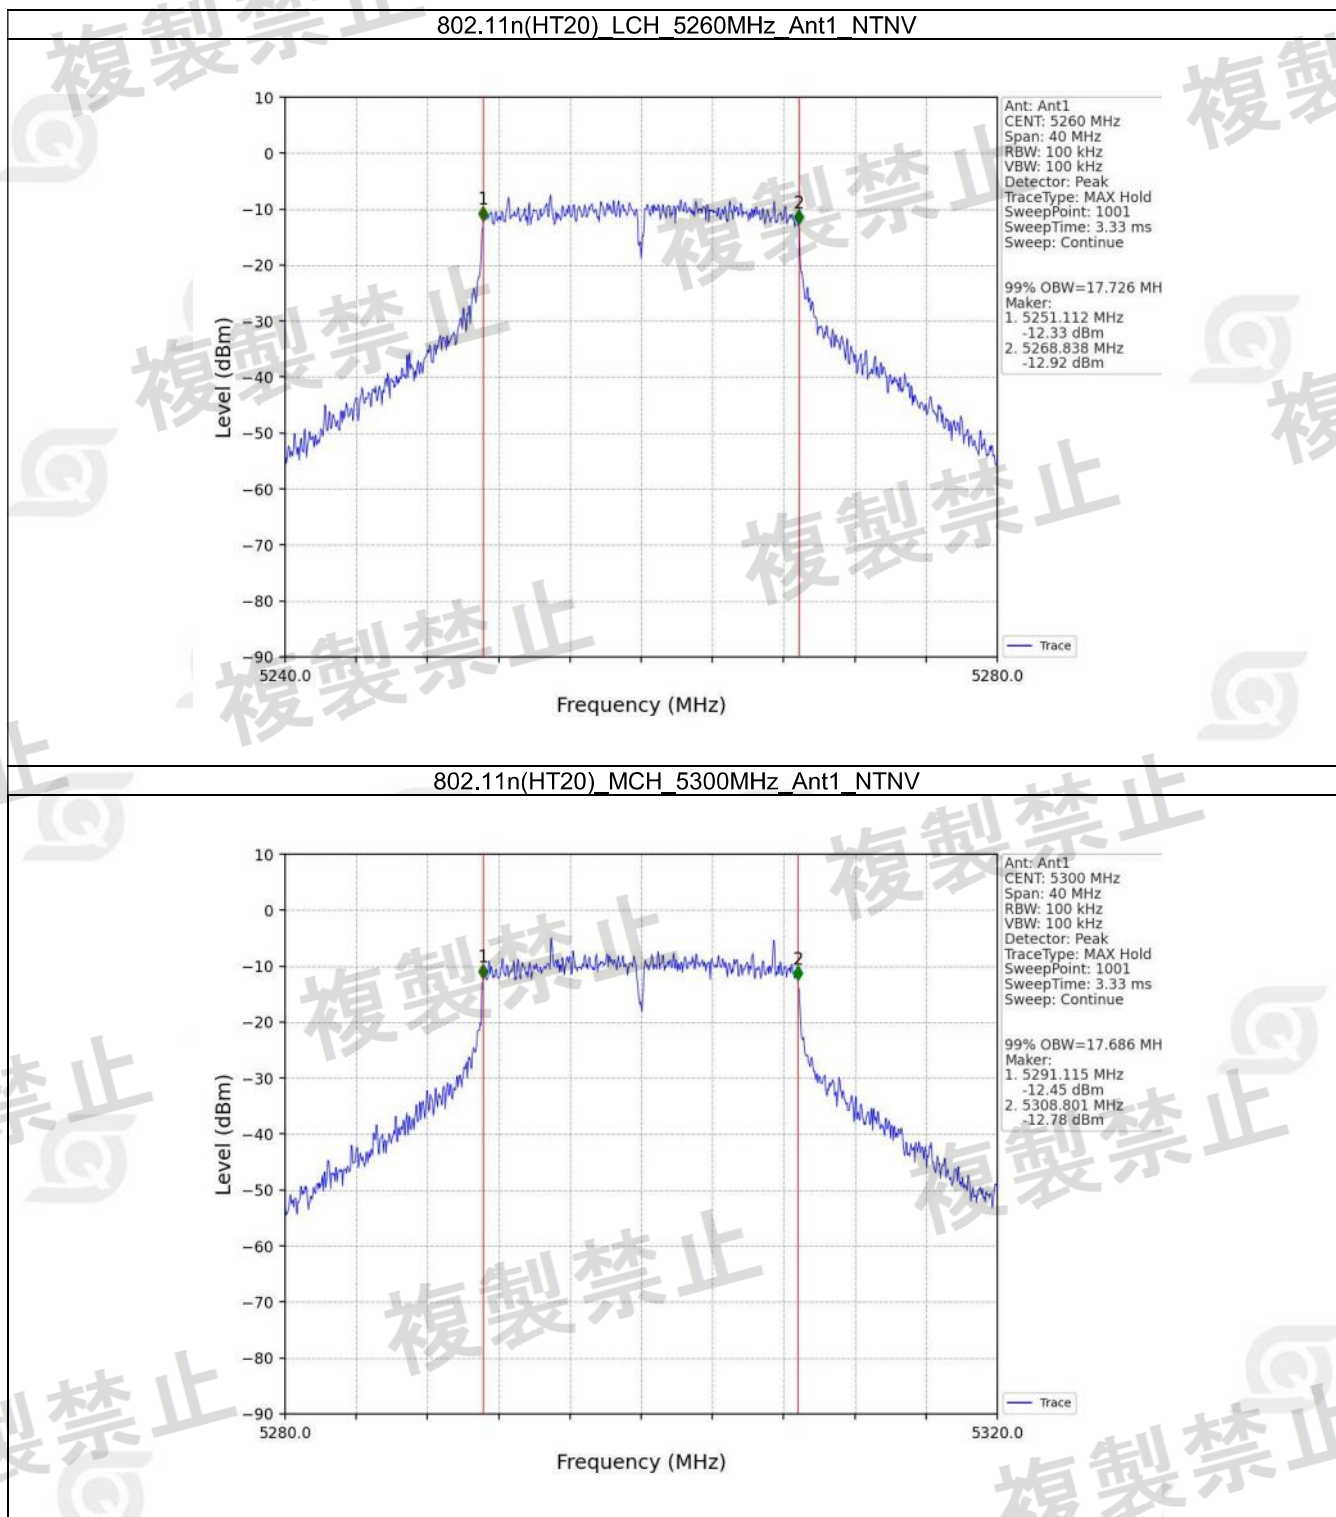


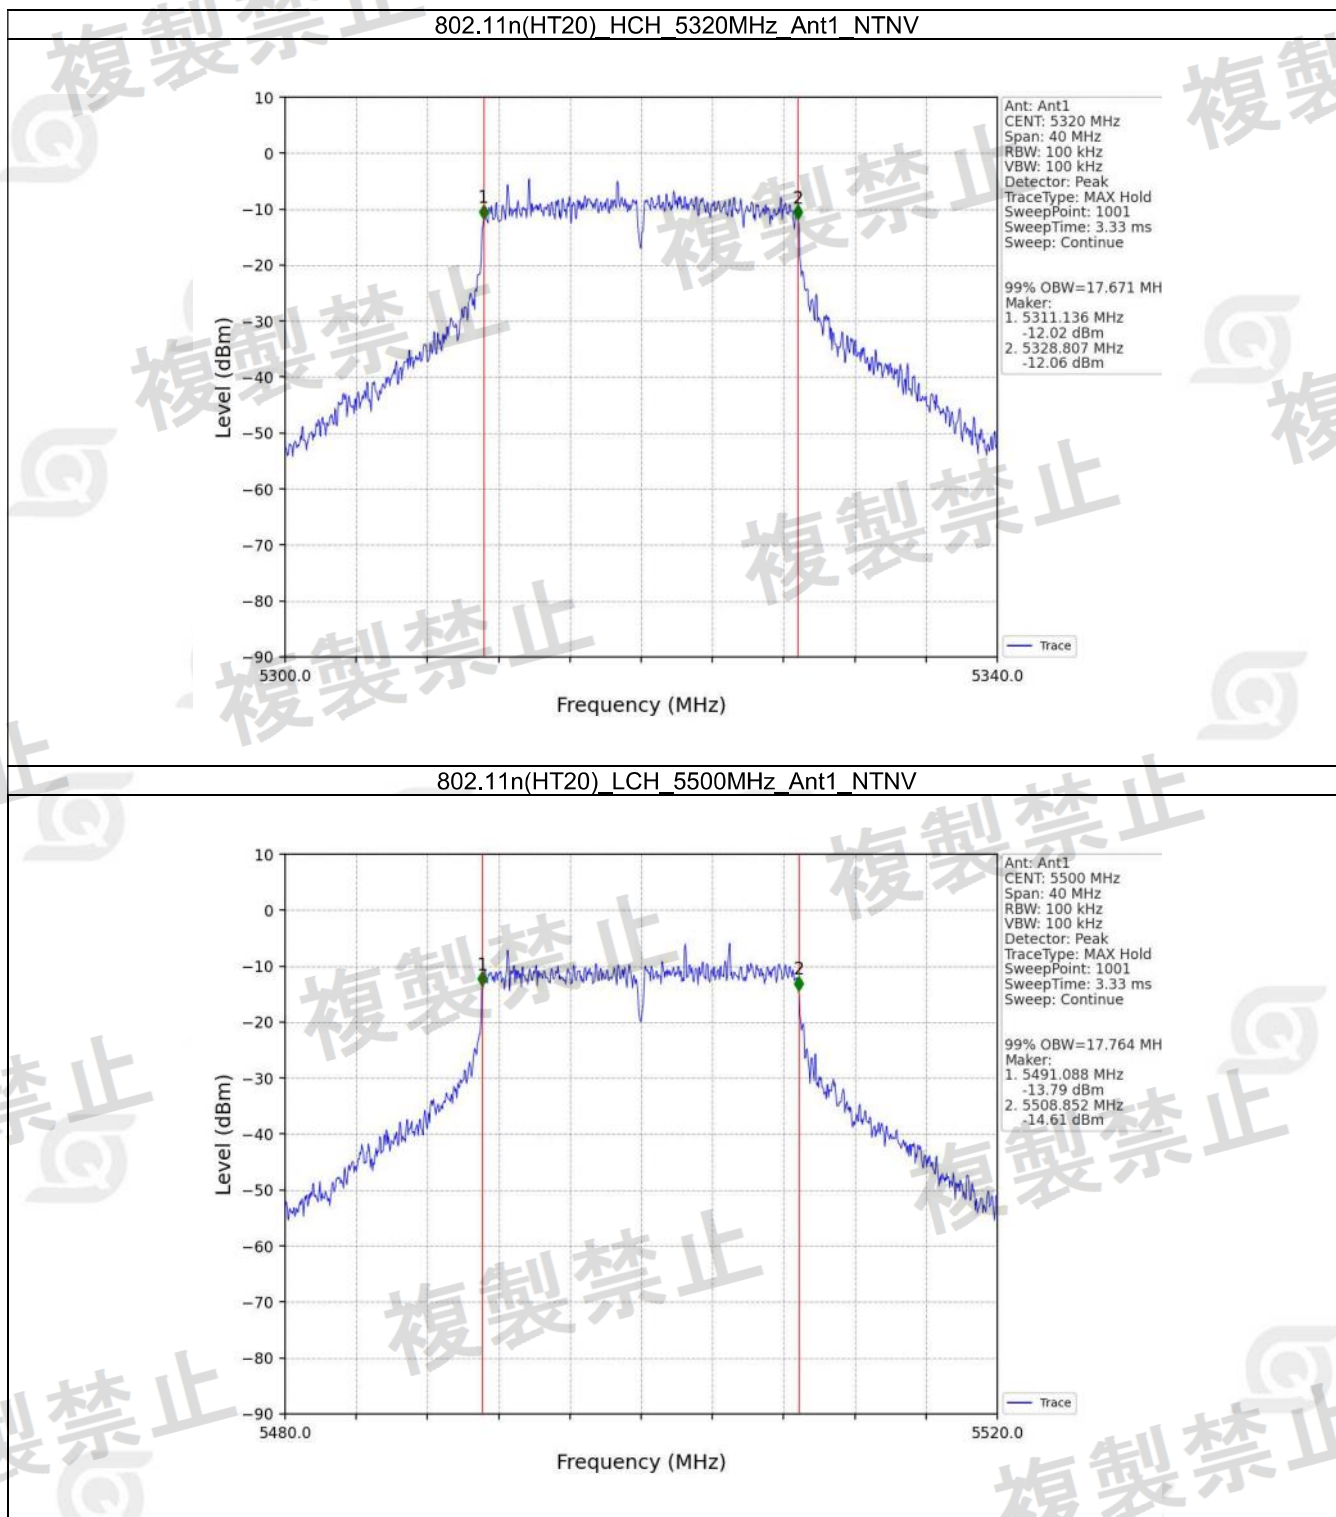

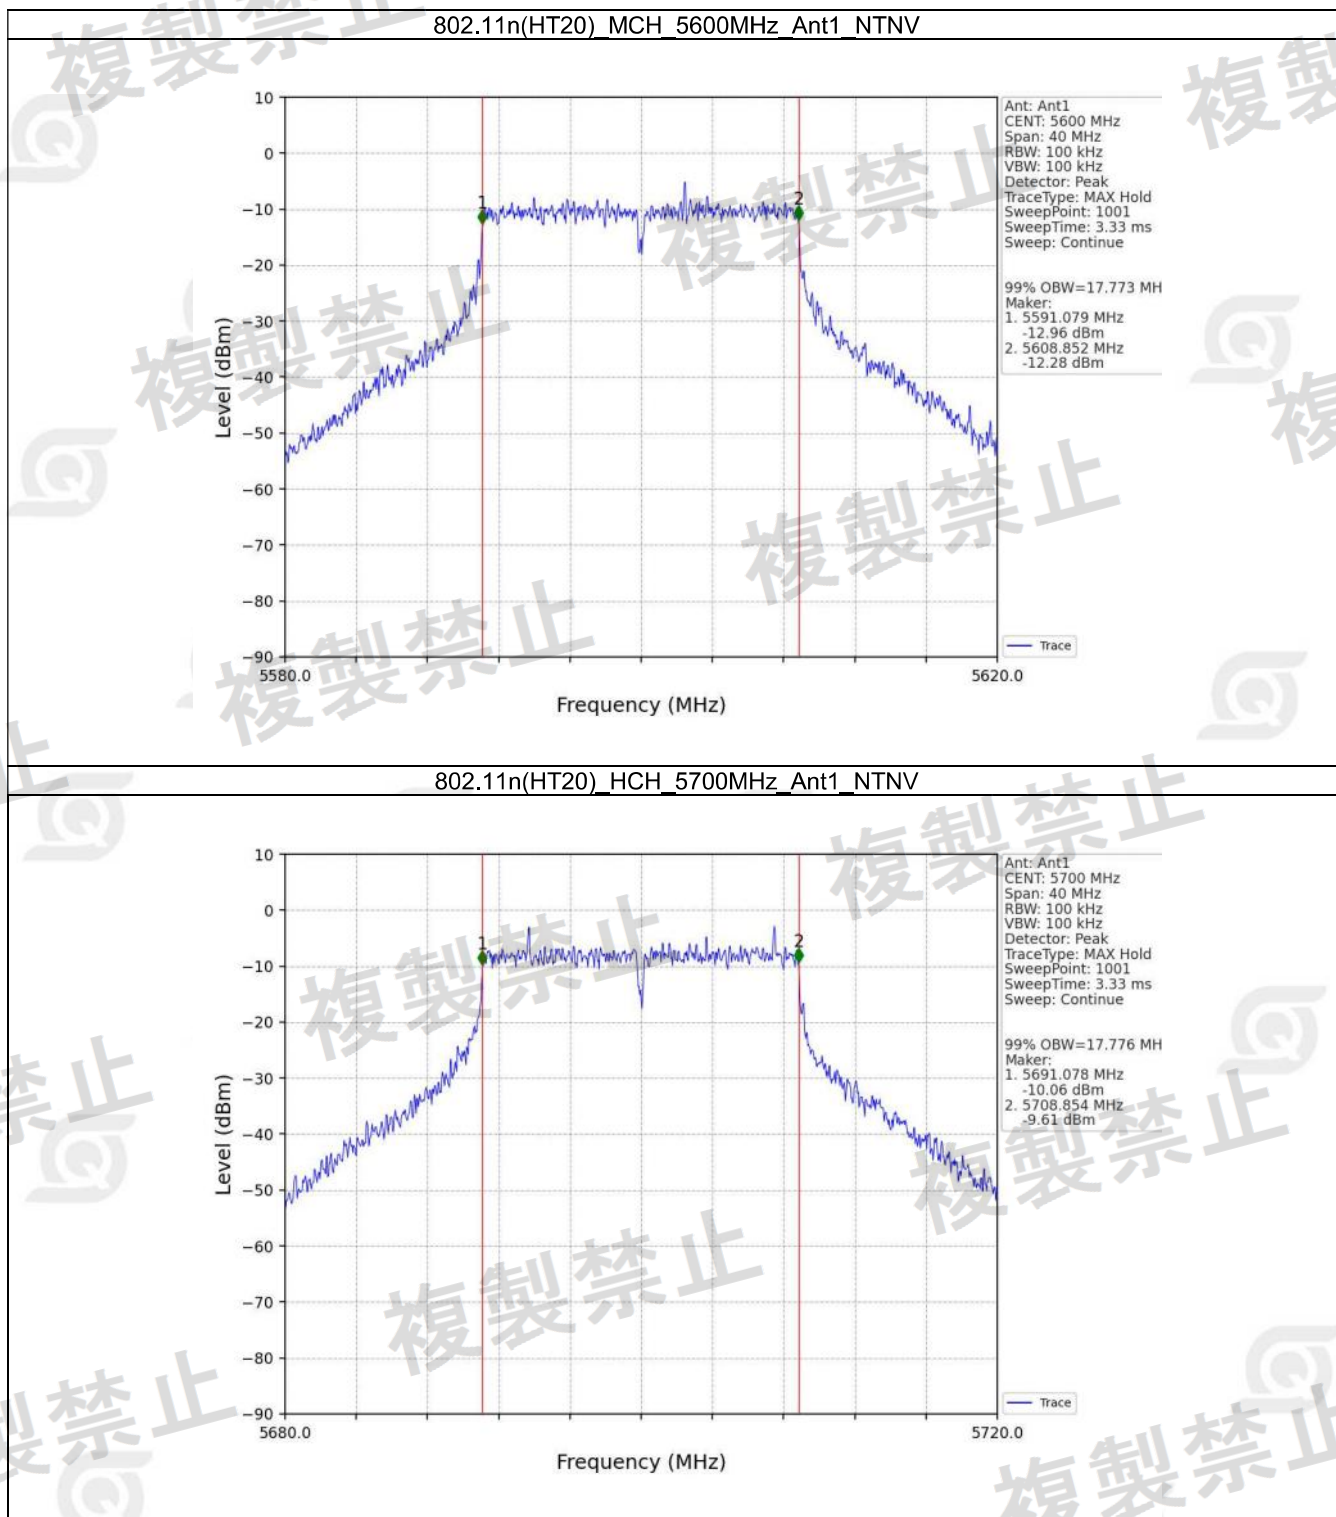


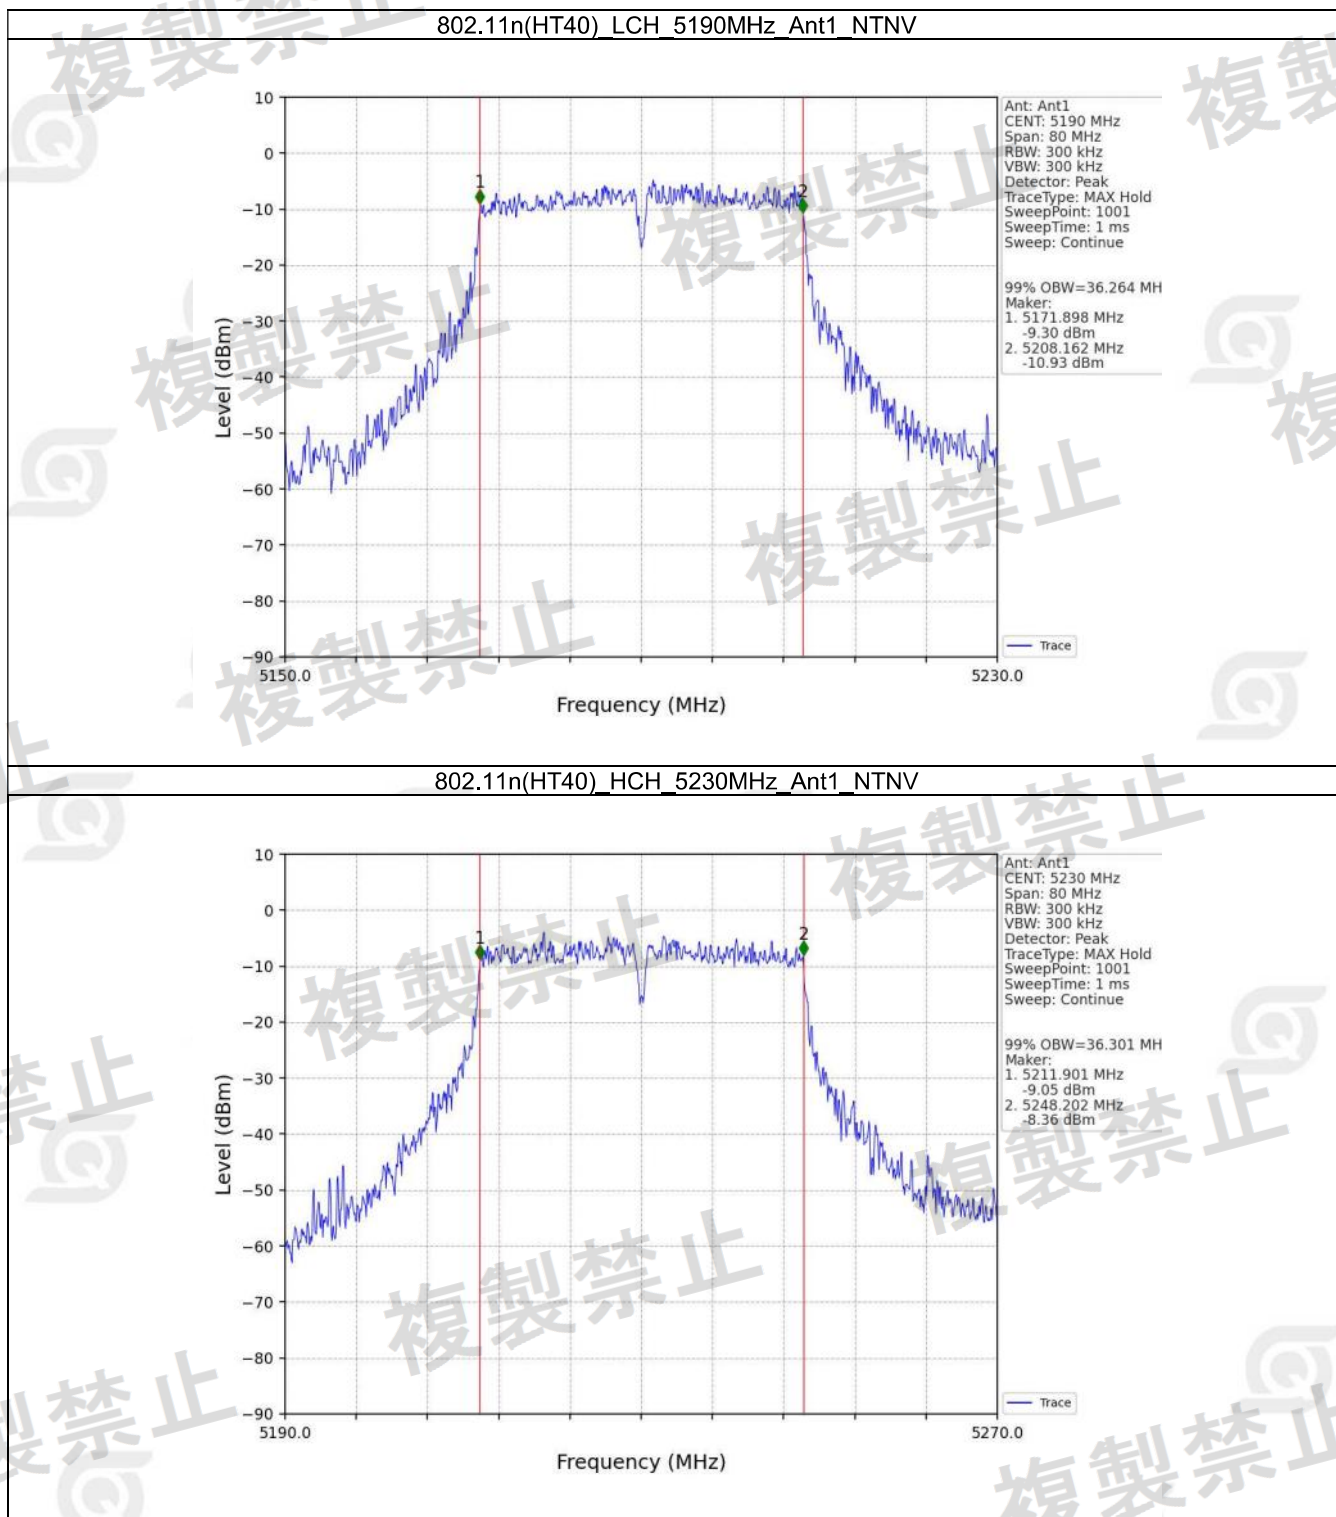

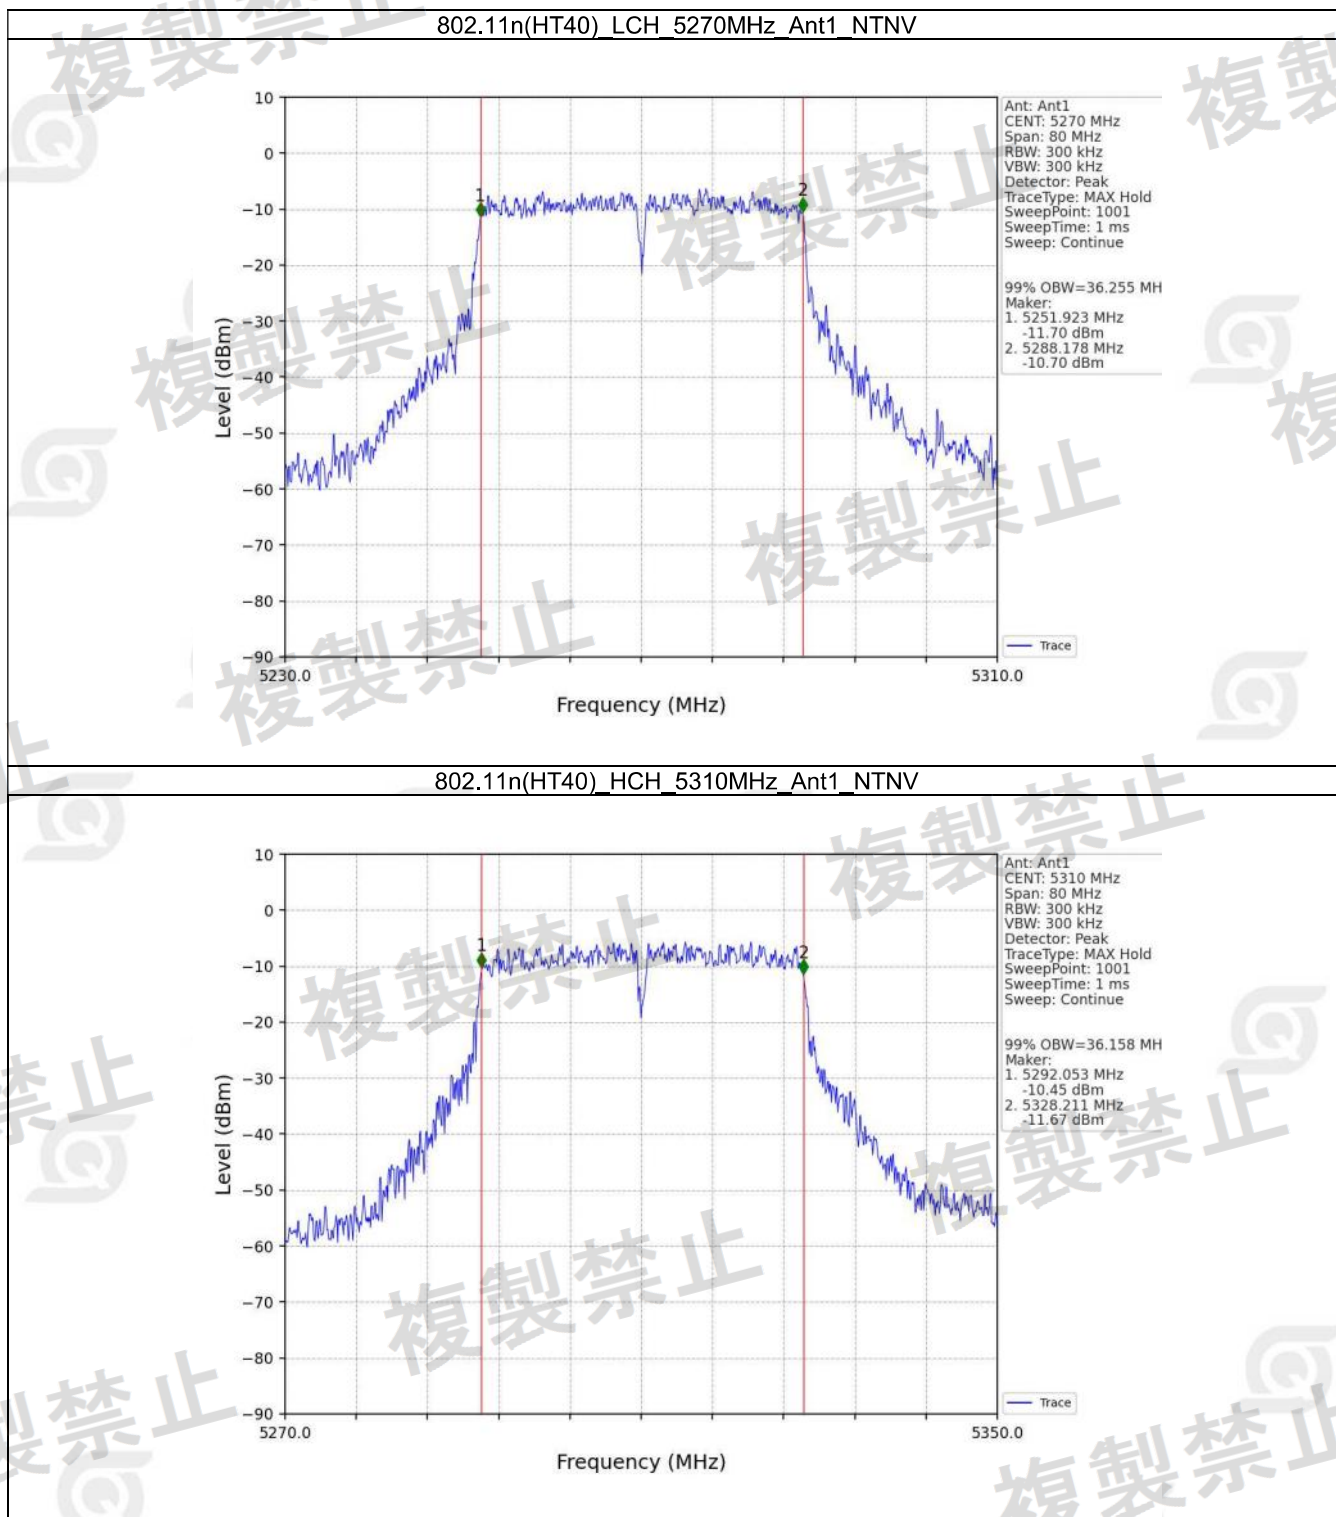


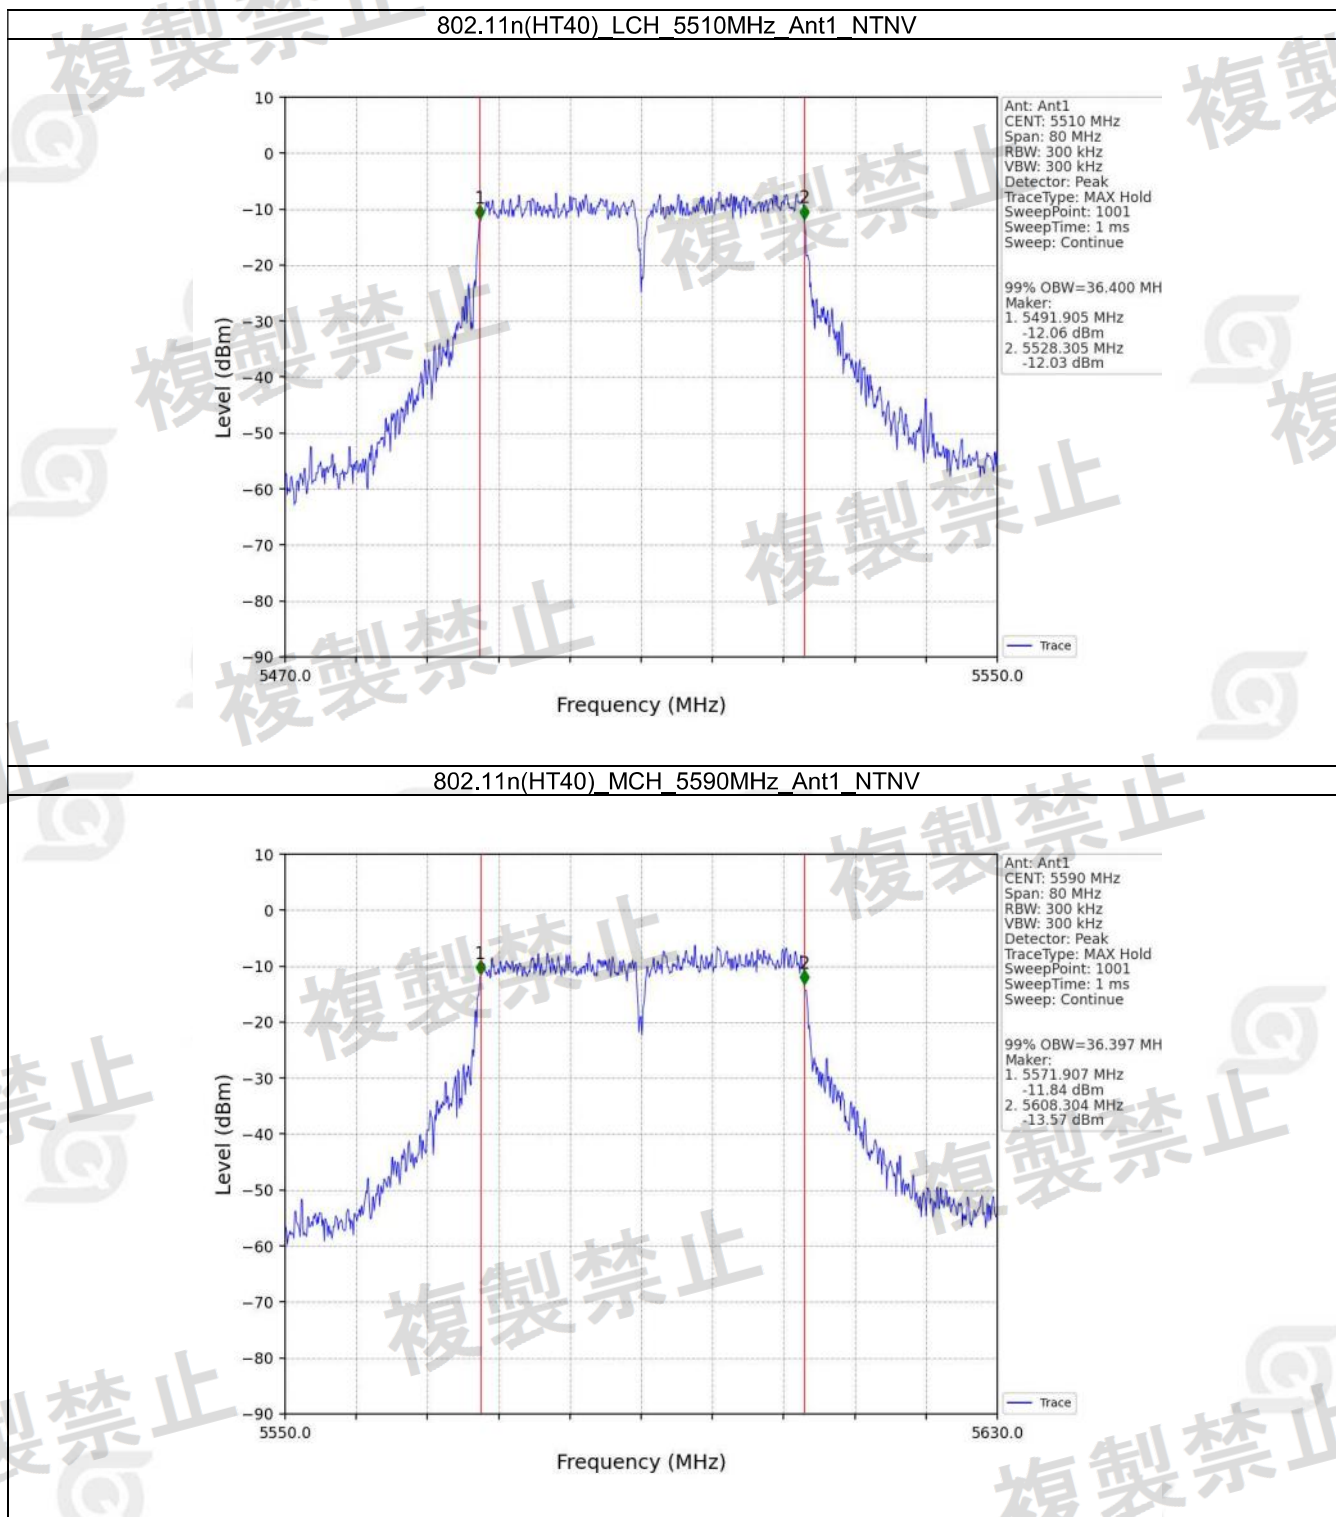



802.11n(HT40)_HCH_5670MHz_Ant1_NTNV

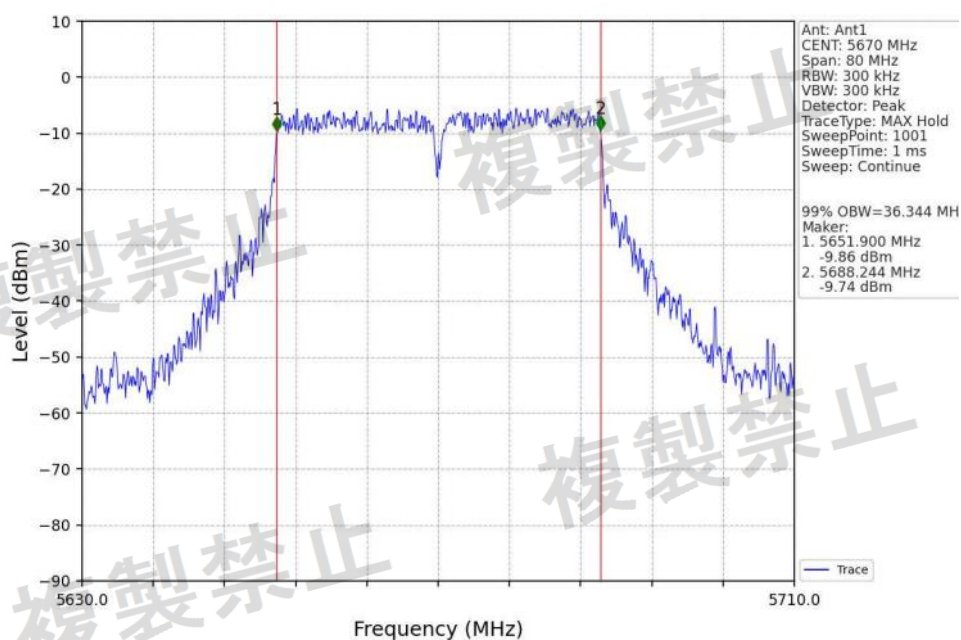



802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

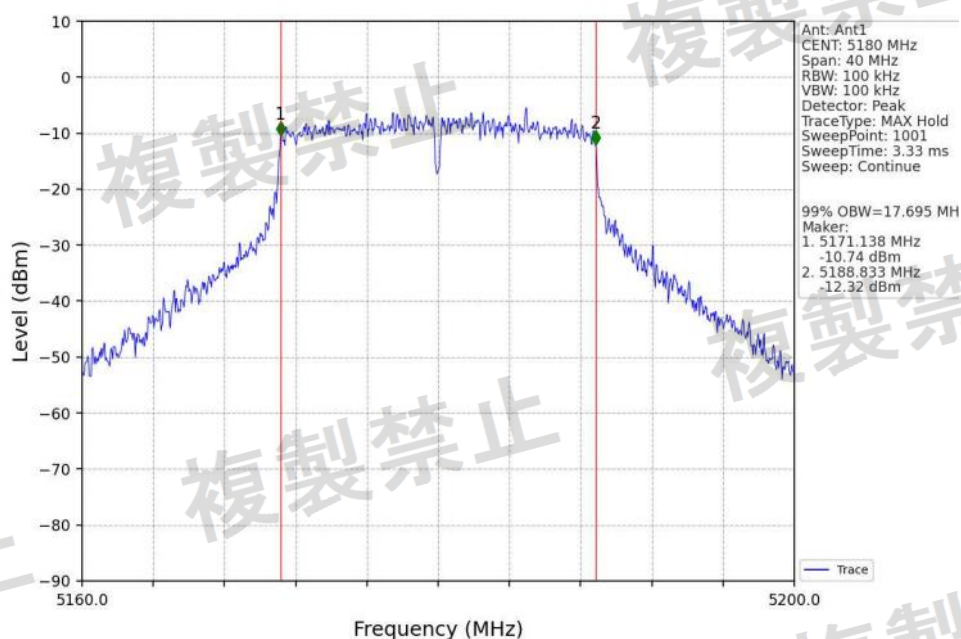


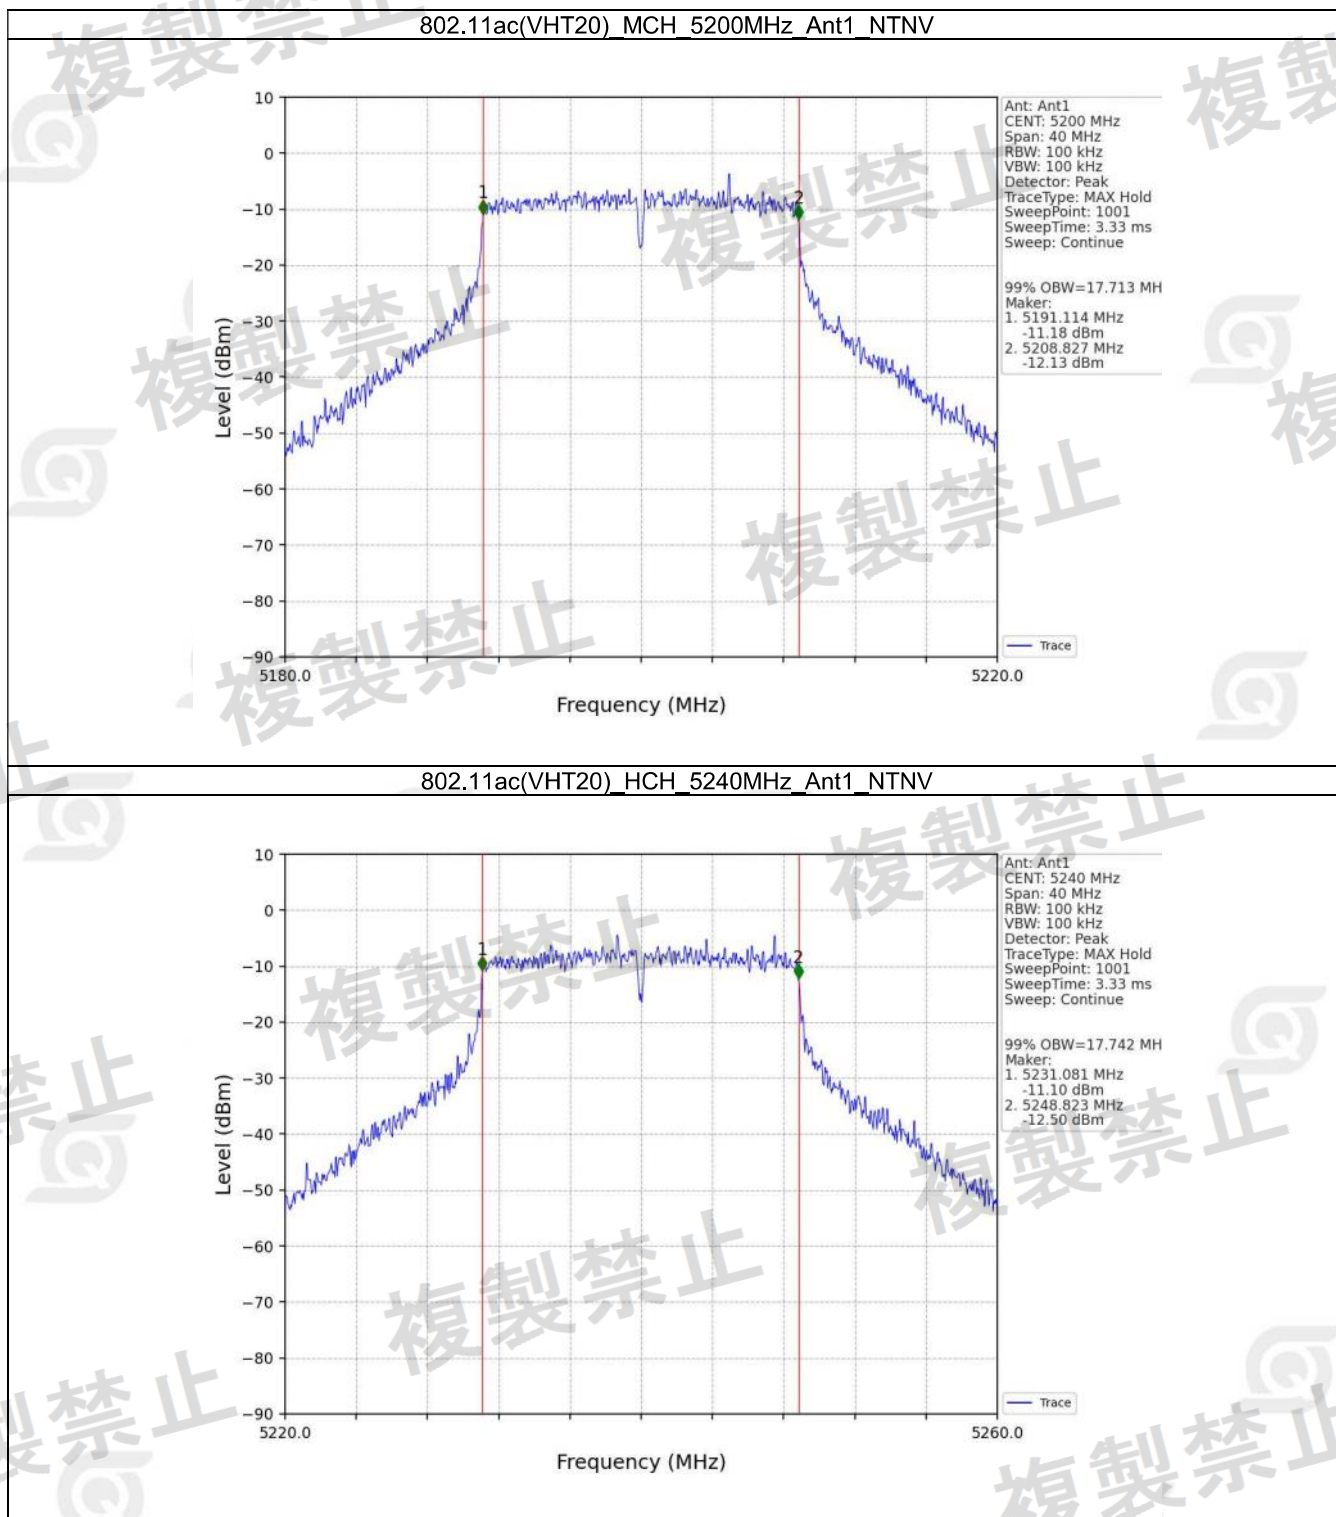


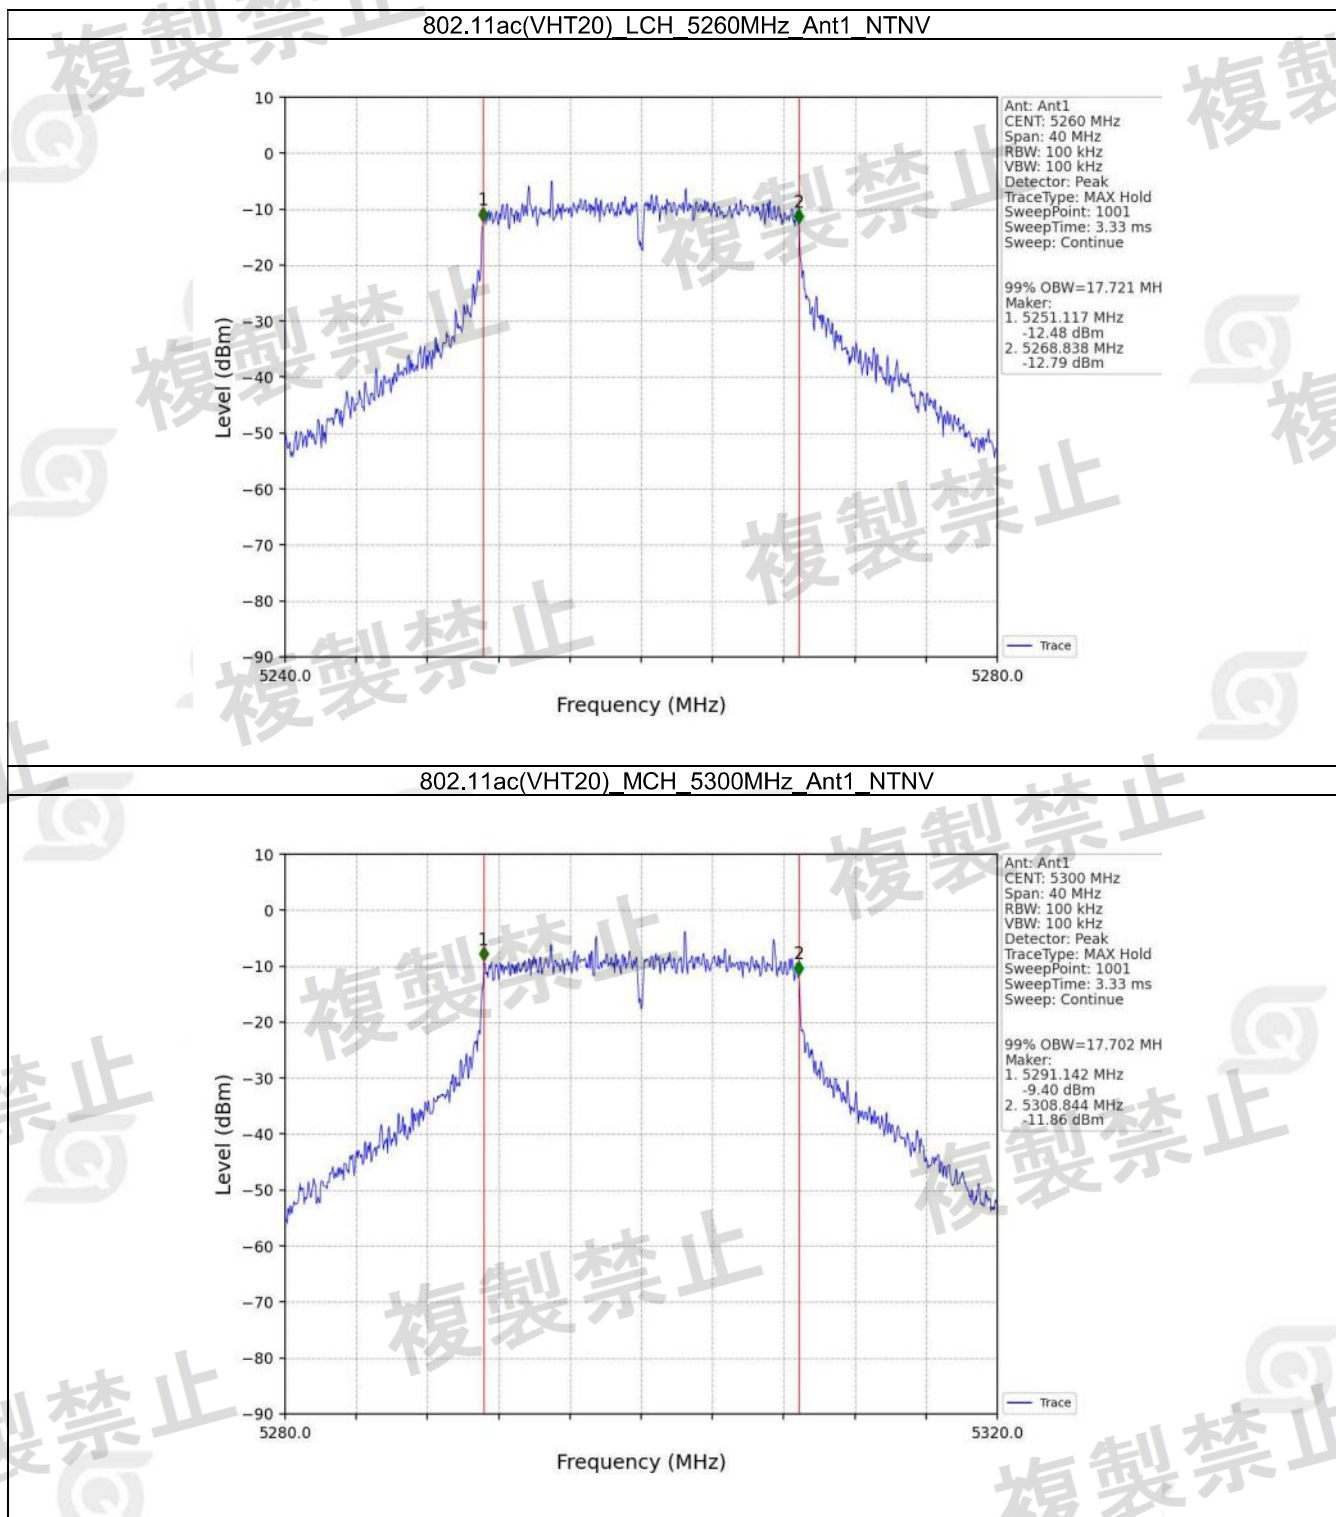

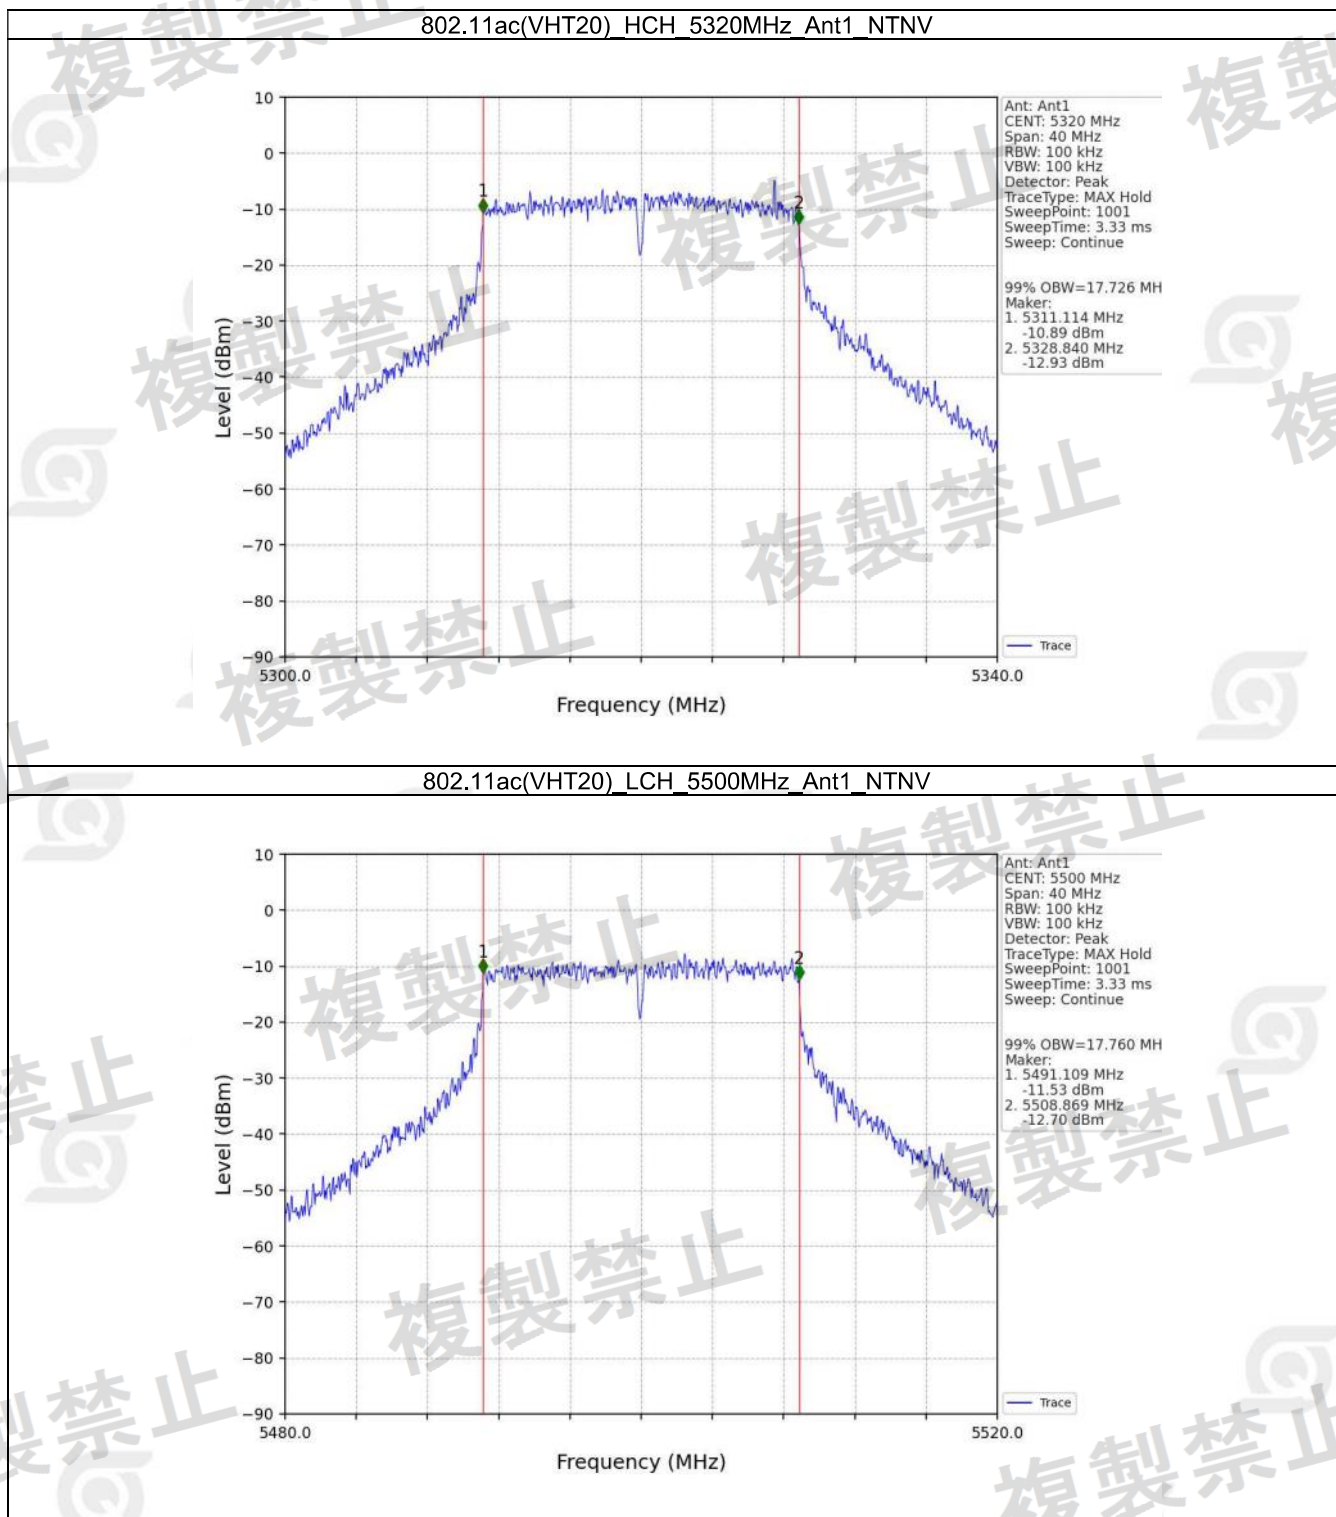


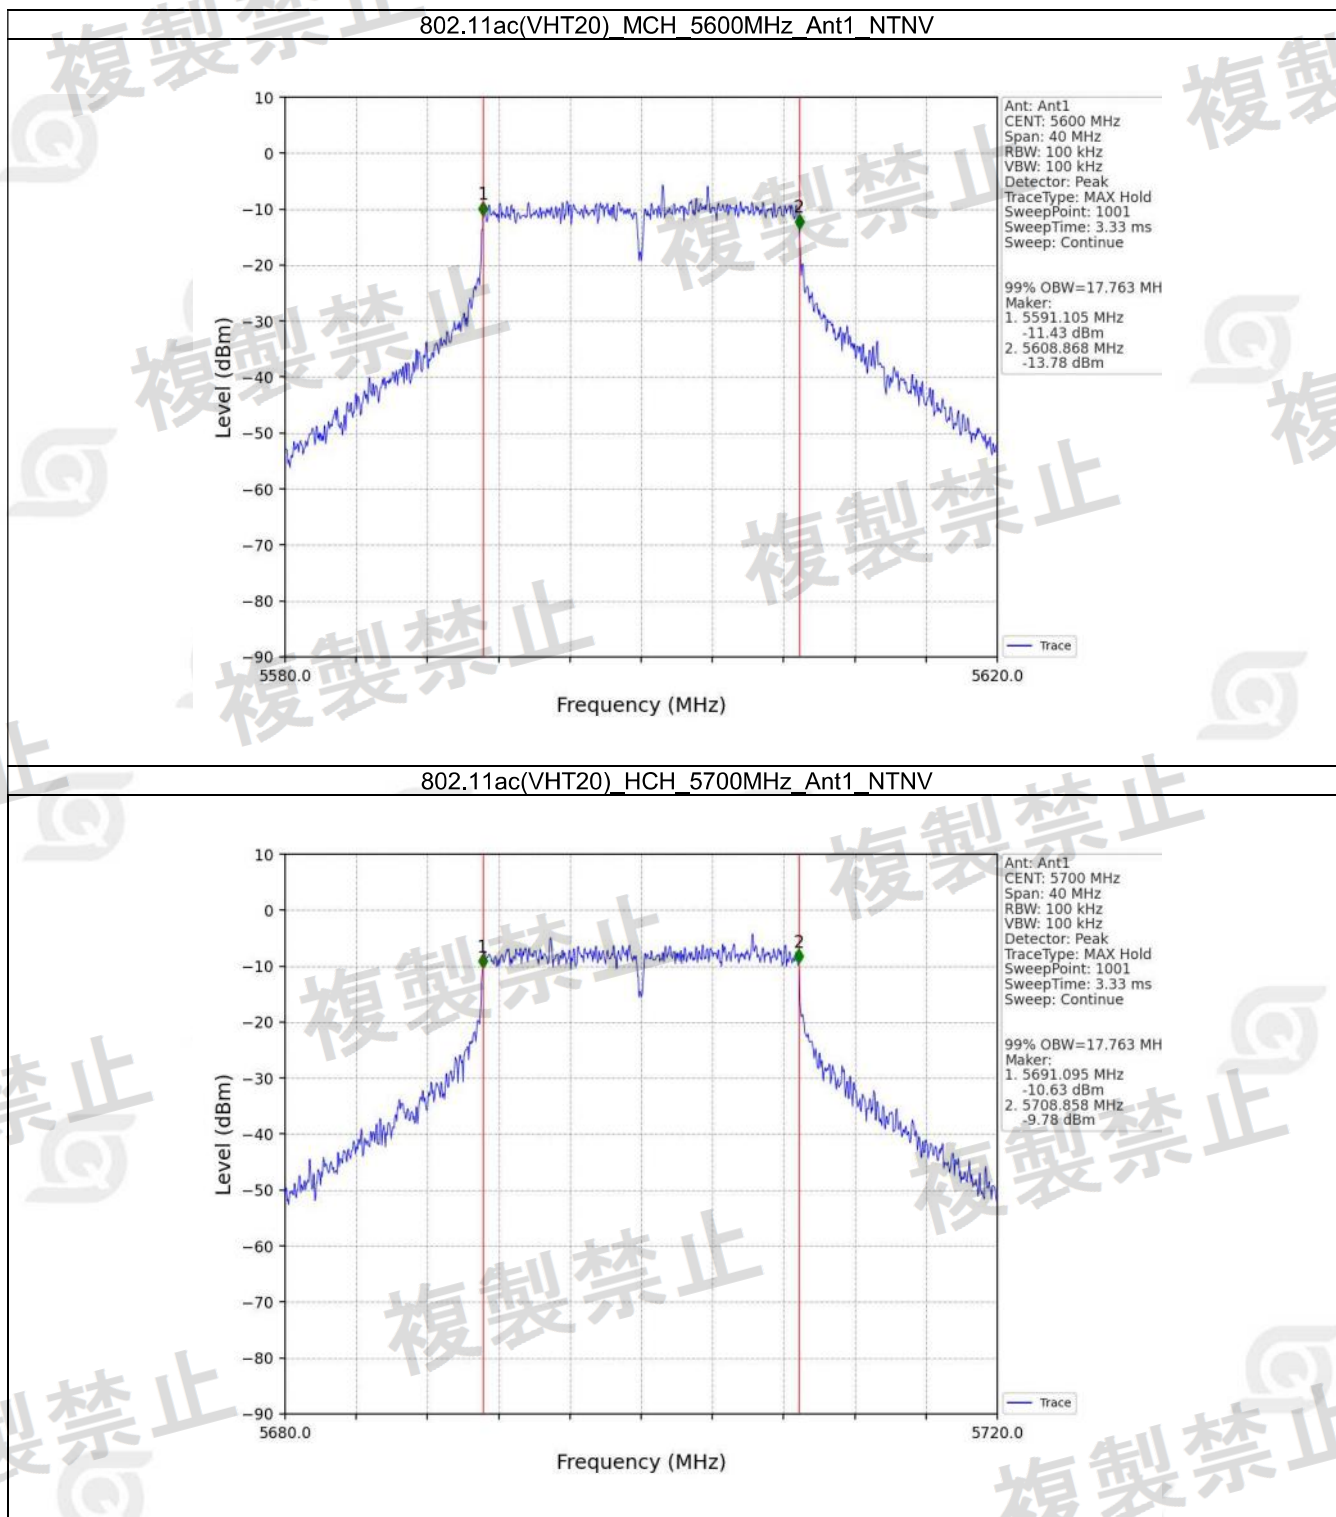

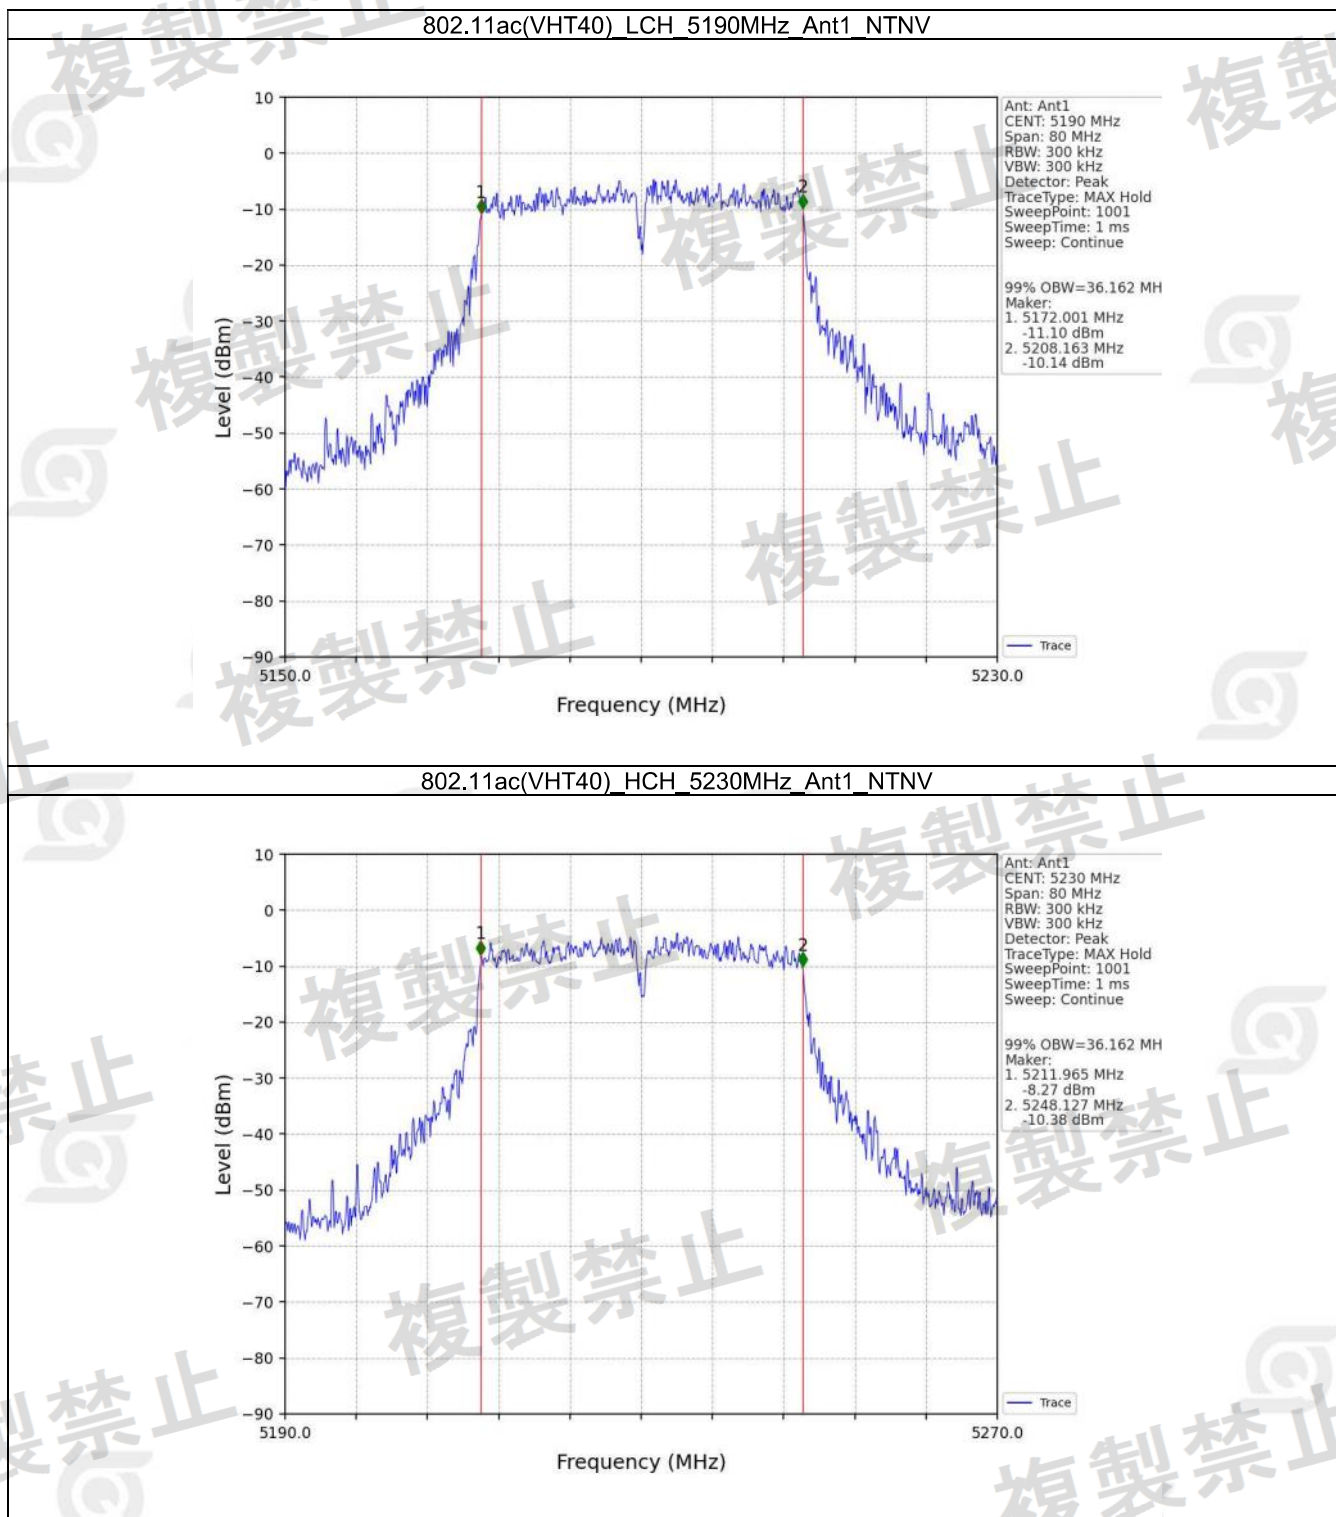

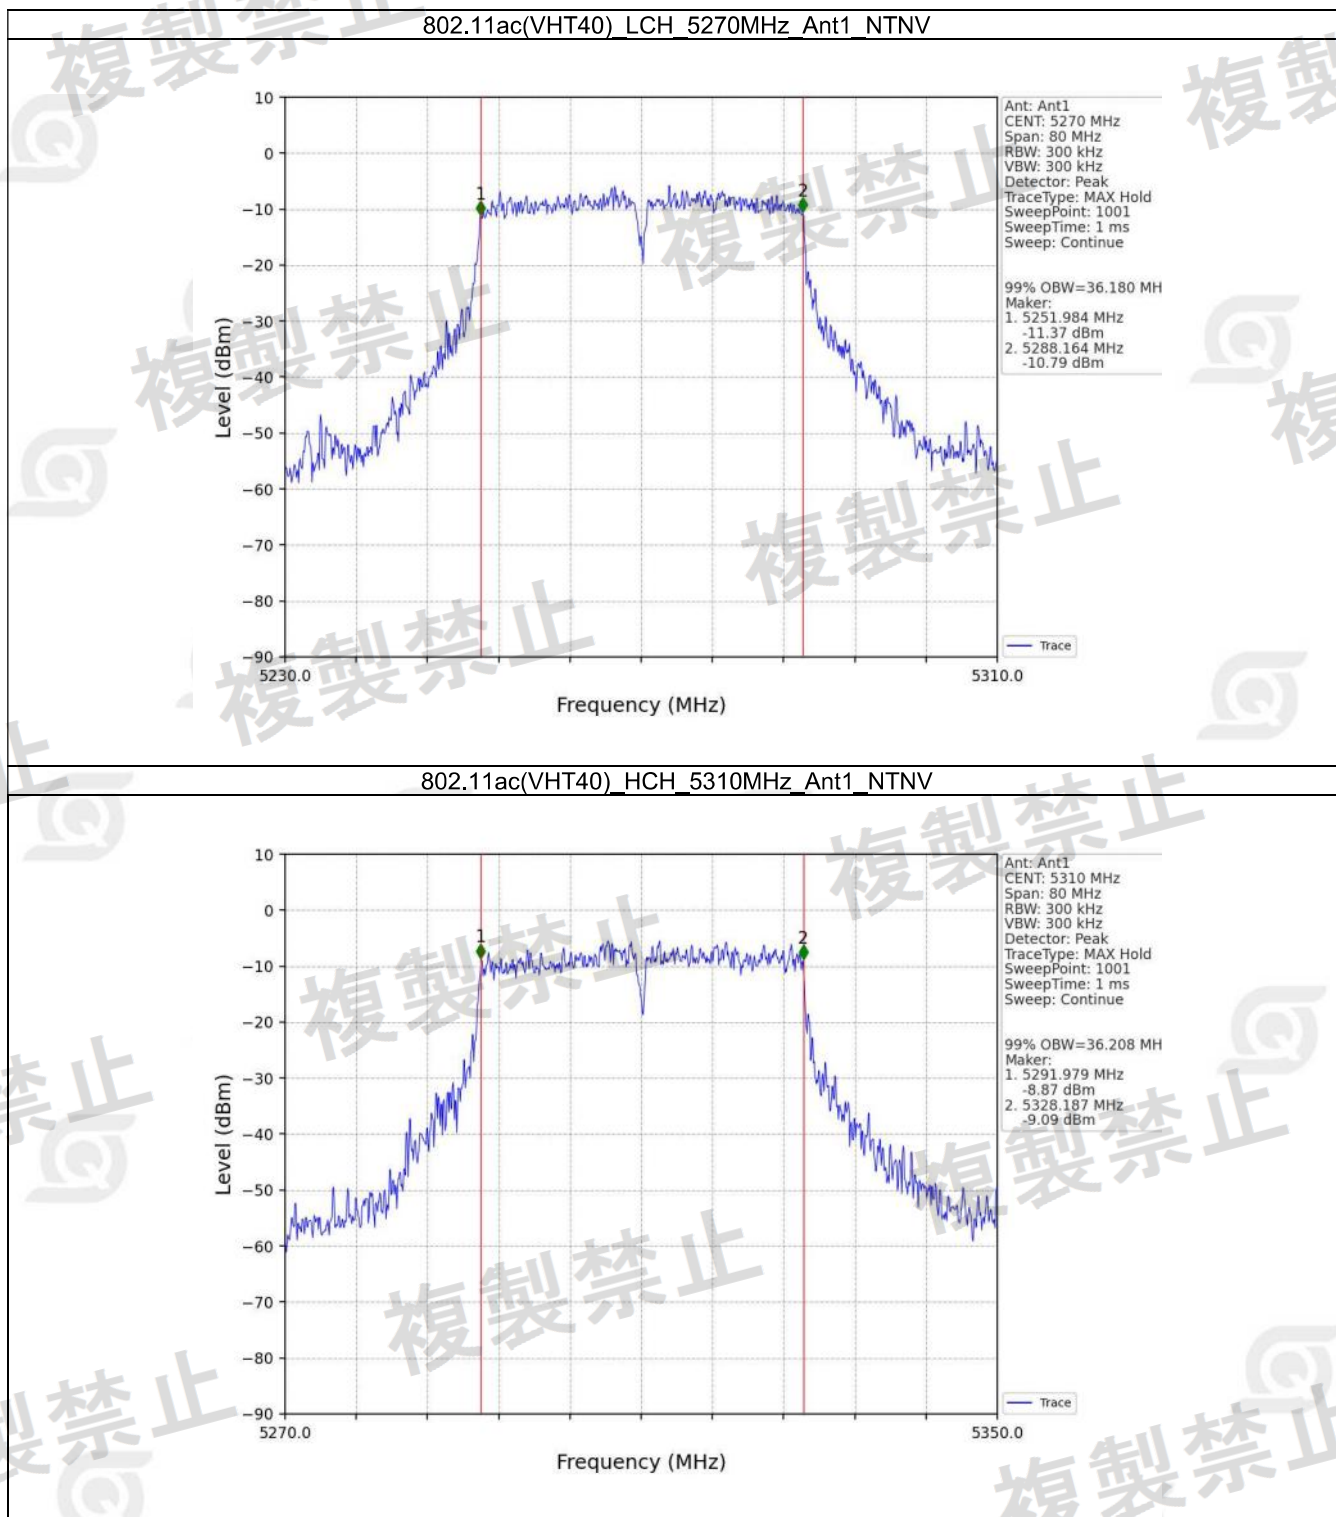

802.11ac(VHT40)_LCH_5510MHz_Ant1_NTNV

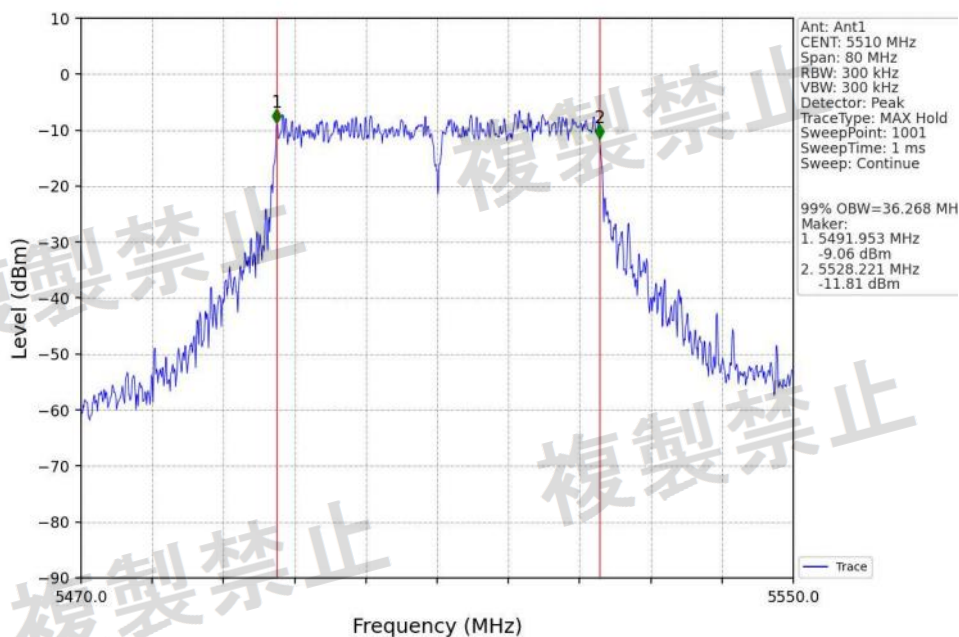

802.11ac(VHT40)_MCH_5590MHz_Ant1_NTNV

