

NCC

低功率射頻電機型式試驗報告

產品名稱 : ACCESS POINT
型號 : APINP303
廠牌 :  
申請者 : 慧與科技股份有限公司
申請者地址 : 臺北市南港區經貿二路 66 號 10 樓之 1
測試標準 : LP0002 (107 年版)
參考法規 : ANSI C63.10-2013
測試結果 : 符合
測試日期 : 2018.09.07 ~ 2018.09.23
發行日期 : 2018.11.04

測試工程師 : 
(柯文凱)
報告審核人 : 
(陳柏均)
報告簽屬人 : 
(柯承志)



修訂紀錄

報告編號	版本	描述	發行日期
1810TW0101-T1	1.0	Original Report	2018-11-04

CONTENTS

Description	Page
1. 一般資訊	5
2. 產品資訊	6
2.1. 待測物裝置資料	6
2.2. 通道清單	7
2.3. 測試模式	7
2.4. 測試系統組合圖	8
2.5. 測試周邊	8
2.6. 待測裝置測試時之典型操作程式	8
3. 量測不確定度	9
4. 測試設備明細	10
5. 測試結果	11
5.1. 電源端點干擾測試	12
5.1.1. 適用標準	12
5.1.2. 量測方法	12
5.1.3. 測試架構圖	12
5.1.4. 電源端點測試結果	13
5.2. 峰值傳導輸出功率	15
5.2.1. 適用標準	15
5.2.2. 量測方法	15
5.2.3. 測試架構圖	15
5.2.4. 峰值傳導輸出功率測試結果	16
5.3. 天線之要求	17
5.3.1. 適用標準	17
5.3.2. 天線樣式	17
5.4. 輻射干擾測試	18
5.4.1. 適用標準	18
5.4.2. 量測方法	18
5.4.3. 測試架構圖	19
5.4.4. 輻射干擾測試結果	21
5.5. 混附發射之 RF 傳導發射	26
5.5.1. 適用標準	26
5.5.2. 量測方法	26
5.5.3. 測試架構圖	26
5.5.4. 混附發射之 RF 傳導發射測試結果	27

5.6.	開放頻帶邊緣之不必要幅射要求.....	29
5.6.1.	適用標準	29
5.6.2.	量測方法	29
5.6.3.	測試架構圖.....	30
5.6.4.	測試結果	31
5.7.	佔用頻道寬度.....	39
5.7.1.	適用標準	39
5.7.2.	量測方法	39
5.7.3.	測試架構圖.....	39
5.7.4.	佔用頻帶寬度測試結果.....	40
5.8.	發射電功率密度	41
5.8.1.	適用標準	41
5.8.2.	量測方法	41
5.8.3.	測試架構圖.....	41
5.8.4.	功率密度量測結果	42

1. 一般資訊

申請者	慧興科技股份有限公司
申請者地址	臺北市南港區經貿二路 66 號 10 樓之 1
製造商	Hewlett Packard Enterprise Company
製造商地址	6280 America Center Drive, San Jose, CA 95002
認證實驗室	台灣曼瑞檢測科技有限公司
實驗室地址	33377 台灣桃園市龜山區復興二路 38 號
測試設備序列號	傳導樣品序列號: CNGHKGX006 輻射樣品序列號: CNGHKGX006
實驗室資訊	1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film. 2. MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada. 3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.

2. 產品資訊

2.1. 待測物裝置資料

產品名稱	ACCESS POINT
產品型號	APINP303
天線樣式	Refer to the table "Antenna List"
天線規格	Refer to the table "Antenna List"
待測物額定電壓	POE input or AC adapter input
調變模式	FHSS
傳輸速率	1Mbps(GFSK)
配件	
電源供應器	Part No.: SDI40-48-U-P7R-C2 Model No.: ATS048T-A480 Input Power: 100 - 240V ~ 50/60Hz, 1.2A Output Power: 48VDC/1A

Note: The applicant provide one POE adapter (Manufacturer: MICROSEMI) for approval testing, it is not for sale.


2. 2. 通道清單

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

2. 3. 測試模式

Mode 1: 發射器 BLE

2.4. 測試系統組合圖

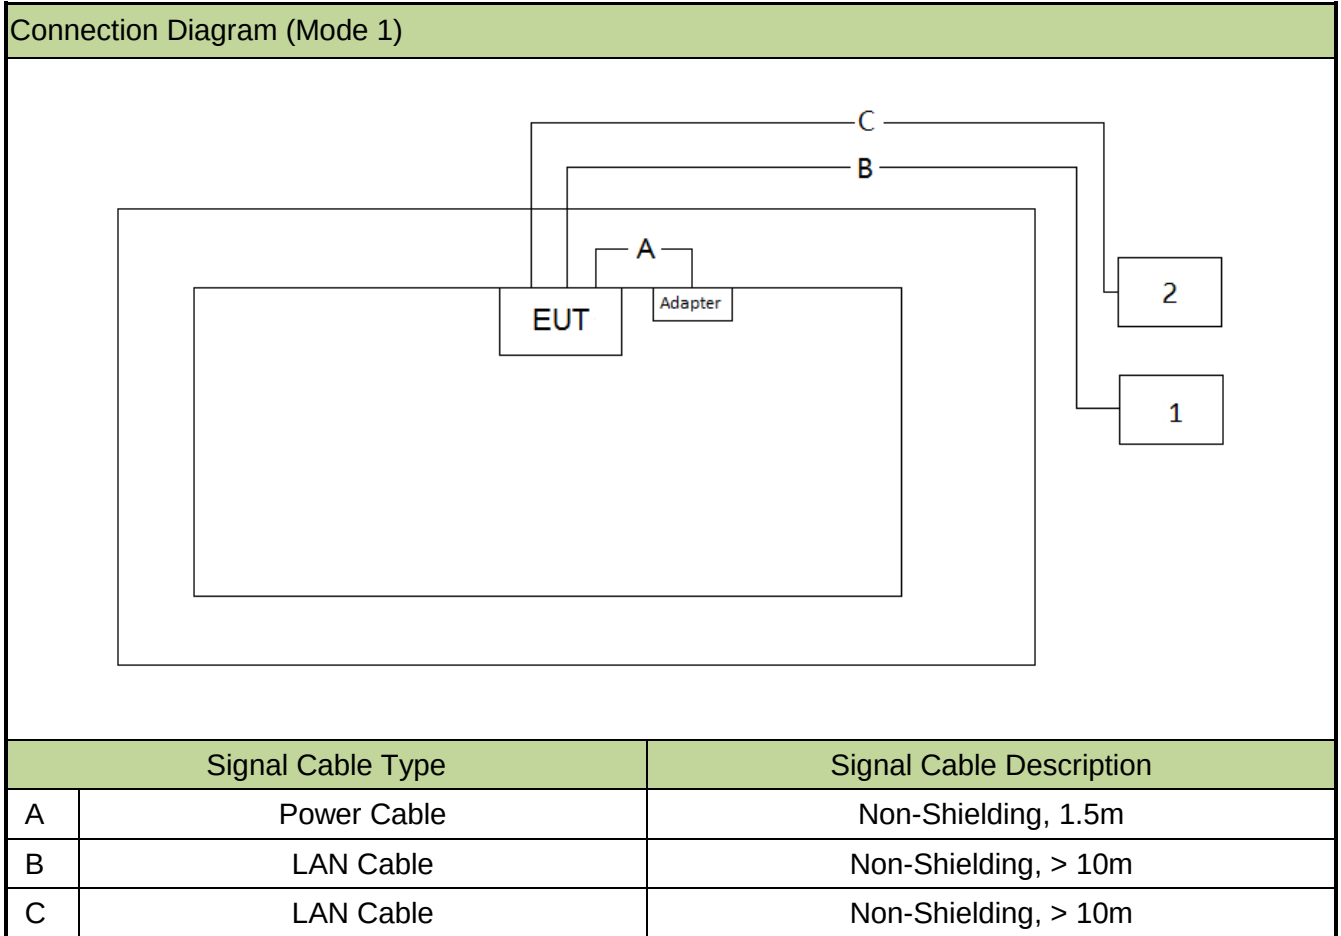

2.5. 測試周邊

Item	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Lenovo	E430c	N/A	Non-Shielded, 1.8m
2	Notebook	Lenovo	X230i	N/A	Non-Shielded, 1.8m

2.6. 待測裝置測試時之典型操作程式

1.	Setup the EUT and simulators as shown on 2.4
2.	Turn on the power of all equipment.
3.	Execute "Telnet" program, and gave the test order provided by applicant.
4.	Configure the test channel and the data rate.
5.	Start test.

3. 量測不確定度

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
Spurious Emissions, Conducted - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.78dB
Output Power - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.13dB
Power Spectrum Density - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.15dB
Occupied Bandwidth - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.28%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4. 測試設備明細

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2019/3/20
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2019/3/20
8-Wire ISN (T8)	R&S	ENY81	MRTTWA00018	1 year	2019/4/24
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2019/5/14
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2019/06/07

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2019/4/24
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2019/5/22
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2019/4/24
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2019/4/23
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2019/4/23
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2019/4/23
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2019/3/19
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/7/30
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2019/5/18
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2019/5/21

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/7/30
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2019/4/24
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2019/5/21

Software	Version	Function
e3	9.160520a	EMI Test Software

5. 測試結果

產品名稱 ACCESS POINT
型號 APINP303

章節	量測項目	限制值	測試結果	測試數據
2.3	電源傳導	低功率射頻電機技術規範 2.3 節	符合	第 5.1 章節
3.10.1.2	峰值傳導輸出功率	$\leq 30.00\text{dBm}$	符合	第 5.2 章節
3.10.1.3	天線之要求	低功率射頻電機技術規範 3.10.1.3 節	符合	第 5.3 章節
3.10.1.5	帶外發射限制	$\leq 20\text{dBc(Peak)}$	符合	第 5.4 章節
2.7	輻射電場強度	低功率射頻電機技術規範 2.8 節	符合	第 5.5 章節
2.7	頻帶邊緣	$\leq 74\text{dBuV/m(Peak)}$ $\leq 54\text{dBuV/m(Average)}$	符合	第 5.6 章節
3.10.1.6(2)(A)	佔用頻寬	$\geq 500\text{kHz}$	符合	第 5.7 章節
3.10.1.6(2)(B)	功率頻譜密度	$\leq 8\text{dBm}$	符合	第 5.8 章節

5.1. 電源端點干擾測試

5.1.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 2.3 節，以市電為電源之低功率射頻電機，其傳導回電源線上頻率自 150kHz 至 30MHz 之射頻電壓(在電源端子每一電源線對接地點)應小於或等於下表所列之限值。測量時應經過 50 微亨利(μH)及 50 歐姆(Ω)之電源線阻抗模擬網路(LISN)。頻率重疊處，以較低限值為準。

Frequency 頻率範圍 MHz	傳導限制值(dBuV)	
	準尖峰值	平均值
0.15 - 0.50	66-56 ^(註)	56-46 ^(註)
0.50 - 5.0	56	46
5.0 - 30	60	50


註:隨頻率之對數遞減

5.1.2. 量測方法

待測物置於高 80 公分之非導體桌面（落地型產品置於地上），將待測物之電源線接至電源阻抗網路器(LISN)，同時保持待測物至 LISN 距 80 公分，並將電源線多餘部份以 30 至 40 公分之八字形捆綁於電源線中央並離地 40cm，於在正常工作狀態下，執行待測物之火線(Line)及地線(neutral)各一次量測。電源端點場強之測量範圍由 0.15MHz –30MHz，所量測之讀值皆為準尖峰值(Quasi-Peak Value)及平均值(Average Value)。場強接收機之解析頻寬為 9kHz。


備 註: 經初測驗證過，電源端點干擾測試對測試頻道數並無差異，因此檢附其中一個測試頻道之測試數。

5.1.3. 測試架構圖

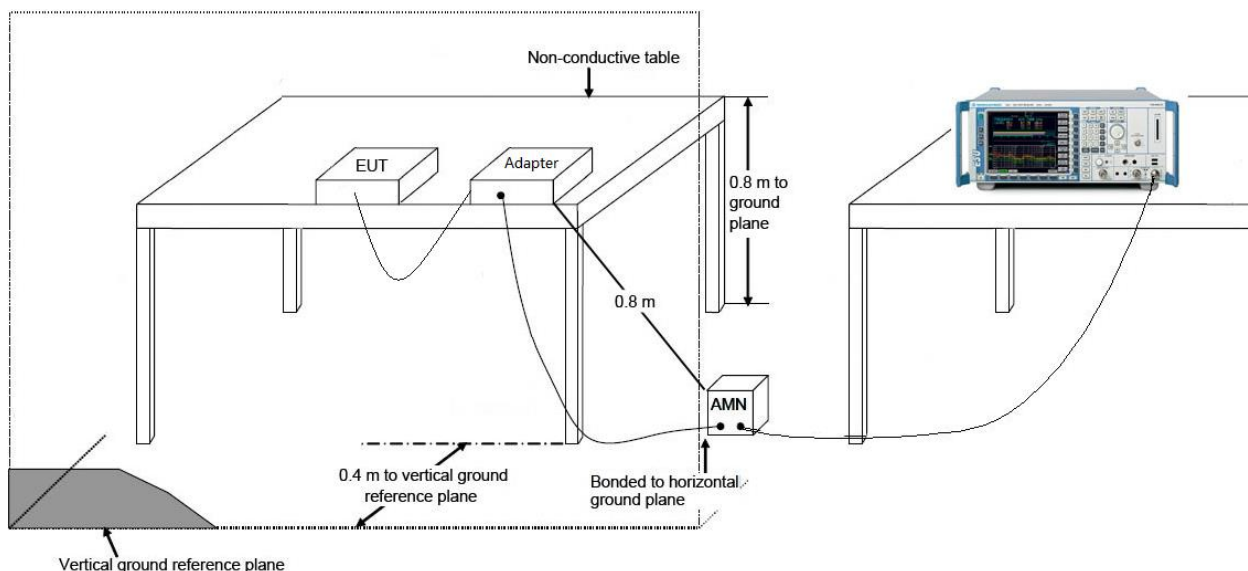

5.1.4. 電源端點測試結果

Site: SR2	Time: 2018/09/23 - 12:03
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kevin Ker
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: ACCESS POINT	Power: AC 110V/60Hz
Worst Case Mode: Transmit by BLE at channel 2480MHz	

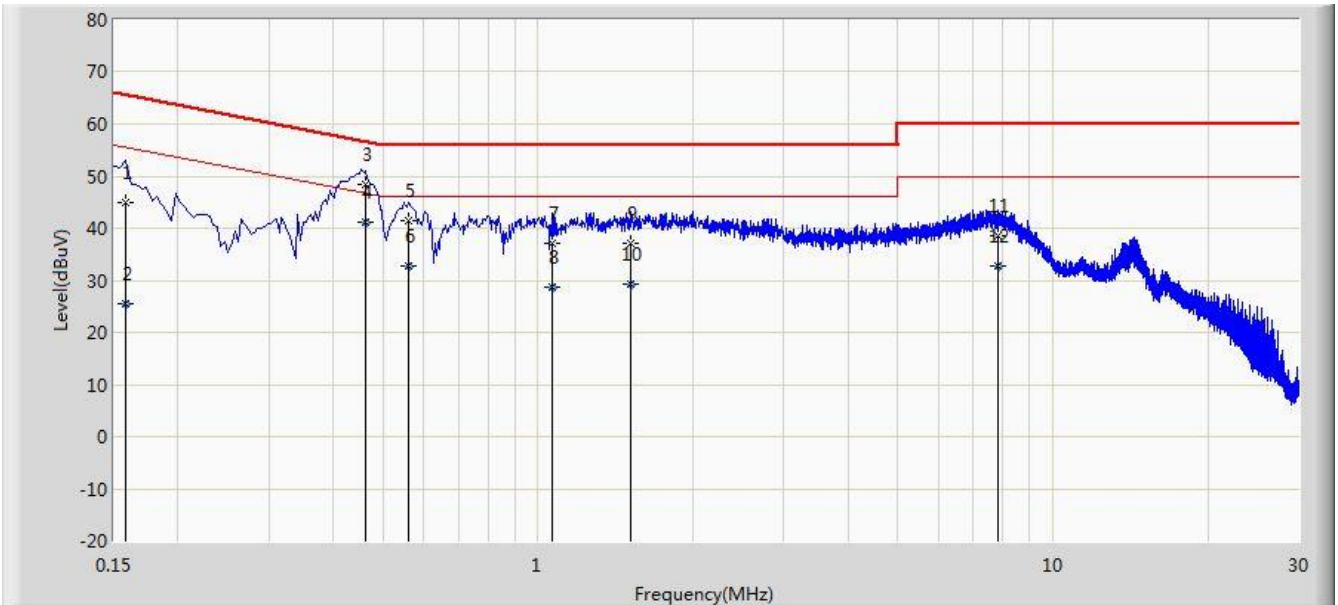


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.158	44.959	34.648	-20.610	65.568	10.311	QP
2			0.158	25.417	15.106	-30.151	55.568	10.311	AV
3			0.462	48.542	38.406	-8.115	56.657	10.136	QP
4		*	0.462	41.218	31.082	-5.439	46.657	10.136	AV
5			0.562	41.366	31.232	-14.634	56.000	10.135	QP
6			0.562	32.691	22.556	-13.309	46.000	10.135	AV
7			1.066	37.223	27.318	-18.777	56.000	9.906	QP
8			1.066	28.681	18.775	-17.319	46.000	9.906	AV
9			1.514	37.169	27.281	-18.831	56.000	9.888	QP
10			1.514	29.310	19.422	-16.690	46.000	9.888	AV
11			7.798	38.548	28.371	-21.452	60.000	10.176	QP
12			7.798	32.679	22.503	-17.321	50.000	10.176	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2018/09/23 - 12:08
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kevin Ker
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: ACCESS POINT	Power: AC 110V/60Hz
Worst Case Mode: Transmit by BLE at channel 2480MHz	

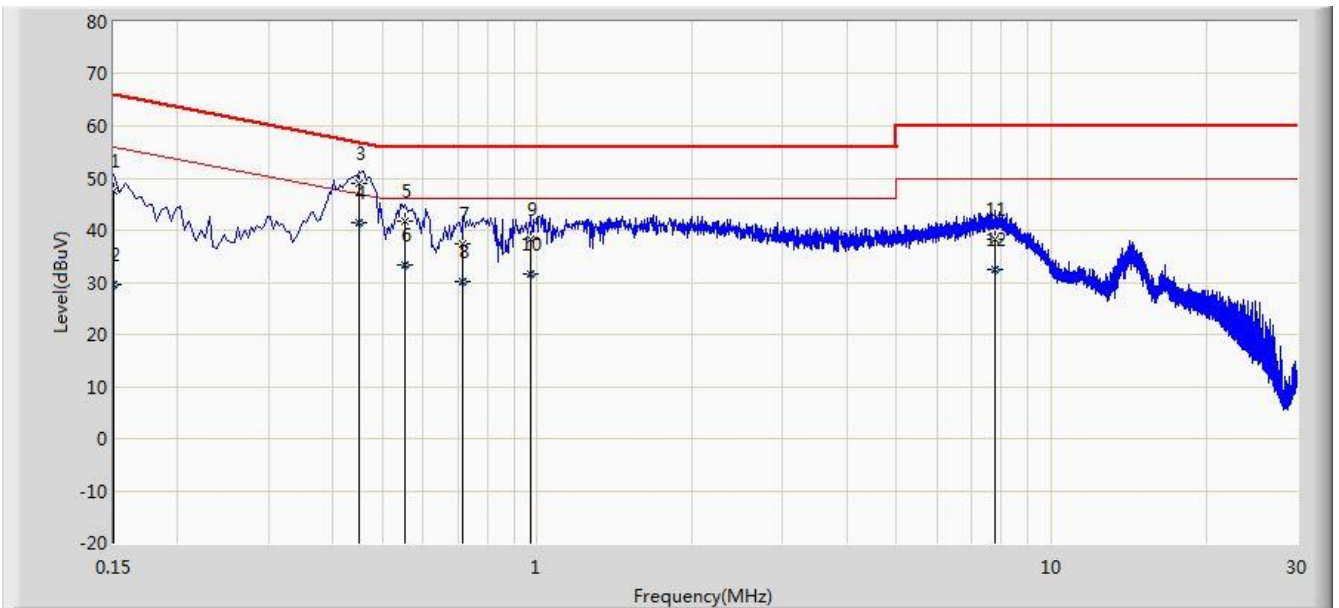

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	47.575	36.433	-18.425	66.000	11.142	QP
2			0.150	29.495	18.353	-26.505	56.000	11.142	AV
3			0.450	48.971	38.821	-7.904	56.875	10.150	QP
4		*	0.450	41.564	31.414	-5.311	46.875	10.150	AV
5			0.554	41.658	31.501	-14.342	56.000	10.157	QP
6			0.554	33.351	23.195	-12.649	46.000	10.157	AV
7			0.718	37.461	27.397	-18.539	56.000	10.065	QP
8			0.718	30.285	20.220	-15.715	46.000	10.065	AV
9			0.974	38.131	28.208	-17.869	56.000	9.923	QP
10			0.974	31.576	21.653	-14.424	46.000	9.923	AV
11			7.782	38.330	28.140	-21.670	60.000	10.190	QP
12			7.782	32.428	22.239	-17.572	50.000	10.190	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

5.2. 峰值傳導輸出功率

5.2.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.2(1)(C)節，操作於 2400-2483.5 MHz 之數位調變的發射器材：1 瓦(W)(含)以下。

依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.3 節，天線增益限制如下：

(1) 操作於 2400 MHz～2483.5 MHz 頻段：

(A) 進行固定式點對點操作時，其發射天線之方向性增益超過6 dBi，每超過3 dBi，最大傳導輸出功率限制值應降低1 dB。

(B) 除第(A)節外，如其發射天線之方向性增益超過6dBi，應依所超過之dB數等量降低最大傳導輸出功率。

(C) 天線以多向波束發射方式(含同時發射或循序發射)將訊號導向多個接收機或接收機群組時，應符合下列規定：

(a) 非同時發射多向波束者，所有載波或頻道傳輸至所有天線陣列或陣列群之總和傳導輸出功率應符合 3.10.1.2 之功率限制值。如天線/天線陣列群之方向性增益超過 6 dBi，每超過 3 dBi，總和傳導輸出功率限制值應降低 1 dB。方向性增益值應計算如下：

(i) 方向性增益值= $10\log(\text{天線陣列之單元數目}) + \text{各單元中最高之方向性增益值}$ 。

(ii) 天線陣列間之遮蔽效應或波束干涉損失能充分佐證時，方向性增益得低於(i)計算數值。


同時發射多向波束於相同或不同頻道者，其每一波束功率應符合(a)之功率限制值。如發射波束有重疊現象，功率應降低，以確保總和傳導輸出功率符合(a)之限制值。同時發射的所有波束總和傳導輸出功率不大於(a) 總和傳導輸出功率限制值加 8 dB。方向性增益值計算同(a)。

(c) 發射機之天線具備單向波束功能者，應符合(1)(A)及(3)後段之規定。

5.2.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端，設定頻譜分析儀之解析度頻寬大於 6dB 發射頻寬或使用峰值功率表。

5.2.3. 測試架構圖

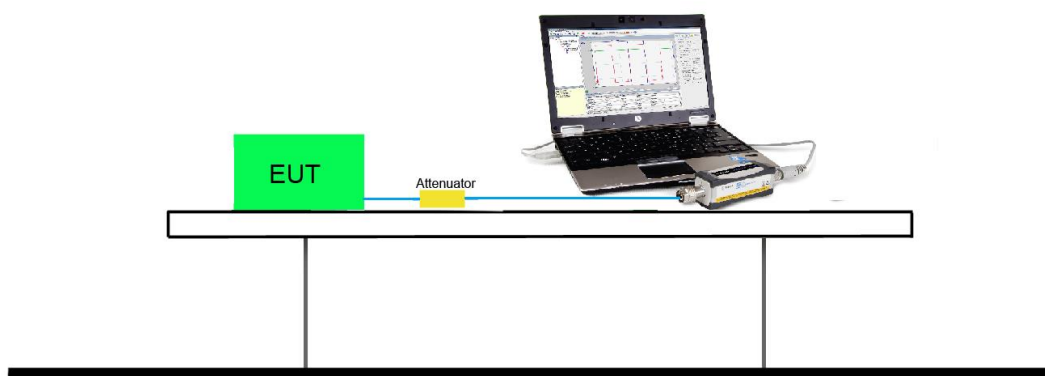

5.2.4. 峰值傳導輸出功率測試結果

Product	ACCESS POINT	Temperature	23°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	SR2	Test Date	2018/09/07
Test Item	Output Power		

Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	8.03	≤ 30.0	Pass
BLE	1	19	2440	7.99	≤ 30.0	Pass
BLE	1	39	2480	8.00	≤ 30.0	Pass

Note: E.I.R.P (dBm) = Peak Power (dBm) + Antenna Gain (dBi) = 8.03 dBm + 4.5 dBi = 12.53 dBm.

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	7.95	≤ 30.0	Pass
BLE	1	19	2440	7.91	≤ 30.0	Pass
BLE	1	39	2480	7.92	≤ 30.0	Pass

Note: E.I.R.P (dBm) = Average Power (dBm) + Antenna Gain (dBi) = 7.95 dBm + 4.5 dBi = 12.45 dBm.

5.3. 天線之要求

5.3.1. 適用標準

低功率射頻電機之發射機或收發信機所使用之天線，應為全固定、半固定式或以獨特之耦合(unique coupling)方式連接機體。製造者可設計供使用者因損壞而替換之天線，但不得設計或使用原認證以外之天線或可供引接各類電纜之標準天線插座或電氣連接頭，如：BNC、F type、N type、M type、UG type、RCA、SMA、SMB...等及其他各類工業或通訊標準接頭。

5.3.2. 天線樣式

Antenna Type	Frequency Band (GHz)	TX Paths	Max Peak Gain (dBi)	Beam-Forming Directional Gain (dBi)	CDD Directional Gain (dBi)	
					For Power	For PSD
Wi-Fi Internal Antenna						
PCB	2.4	2	2.1	3.01	2.1	5.11
	5	2	5.9	3.01	5.9	8.91
Bluetooth/ZigBee Internal Antenna						
PCB	2.4	1	4.5	--		

Note:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.
If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.
 - For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB = 3.01;
 - For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac, not include 802.11a/b/g.

5.4. 輻射干擾測試

5.4.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.5 節，使用頻帶範圍外之任意 100 千赫 (kHz) 內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz) 內的射頻功率，衰減值限制如下：

(1) 輸出功率以低功率射頻電機技術規範附件二之峰值輸出功率方式量測者，至少須衰減 20 dB，可使用射頻傳導或輻射方式測量。

(2) 輸出功率以低功率射頻電機技術規範 3.10.1(2)(2.3) 之最大傳導輸出功率量測方式者，至少須衰減 30 dB。

此外，落於第 2.7 節禁用頻段之輻射發射，應符合第 2.8 節之規定。

依據國家通訊傳播委員會低功率射頻電機技術規範之第 2.8 節，低功率射頻電機，除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。各頻段重疊處，以較嚴格之限制值為準。

頻 率(兆 赫)	電場強度(微伏/公尺)	測距(公尺)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3


上表規定之電場強度，頻率在 9-90kHz 千赫(kHz)、110-490 千赫(kHz)以及 1000 兆赫(MHz)以上之發射，其量測以平均值檢波器為基準，且須符合第 5.14 節之規定；其他頻率之發射，應以 CISPR 準峰值(quasi-peak) 檢波器測量；非以上表所指定之距離測量時須符合第 5.5 節之規定，而輻射發射之量測頻率範圍須符合第 5.12 節之規定。

5.4.2. 量測方法


低頻待測物置於高 80 公分之非導體桌面（落地型產品置於地上），高頻待測物置於高 150 公分之非導體桌面，受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。

5.4.3. 測試架構圖


9kHz ~ 30MHz Test Setup:

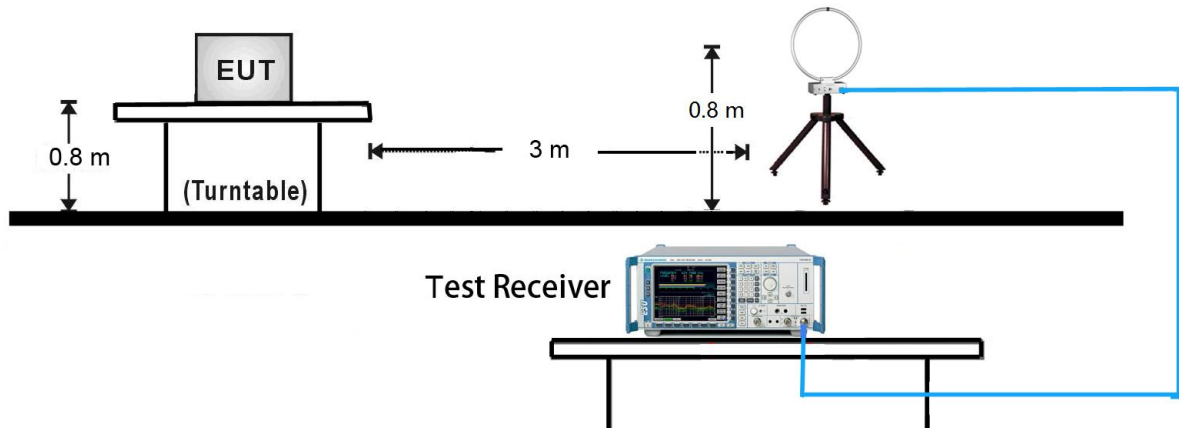


30MHz ~ 1GHz Test Setup:

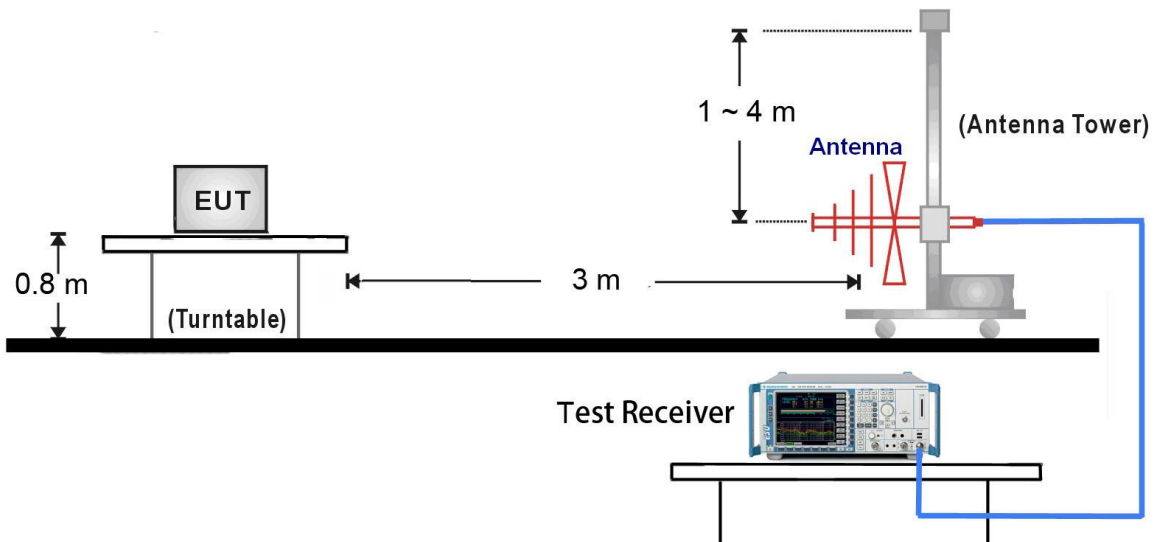

1GHz ~ 18GHz Test Setup:

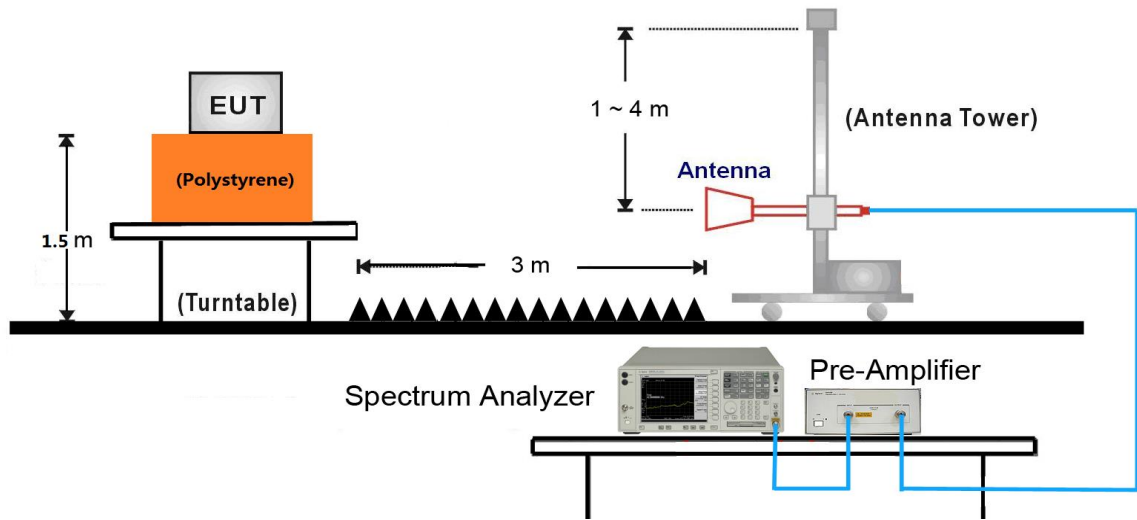

18GHz ~25GHz Test Setup:

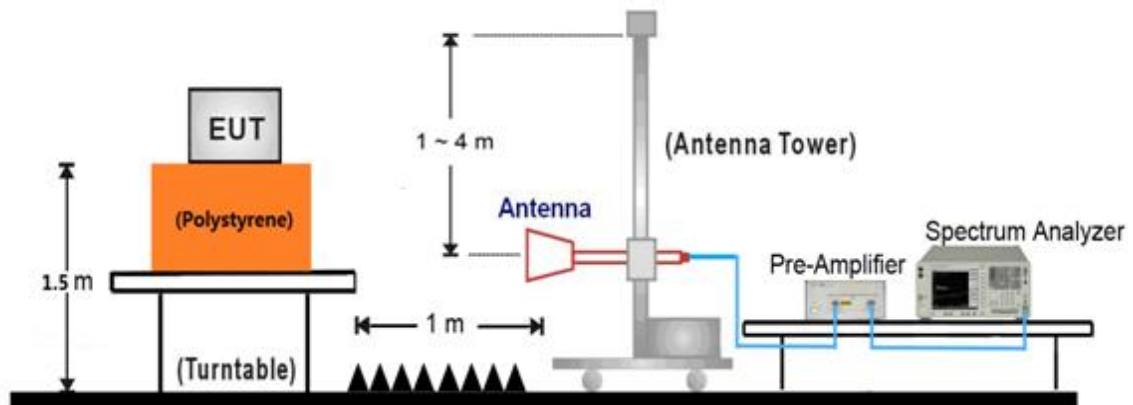

5.4.4. 輻射干擾測試結果

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/17
Test Mode:	BLE	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4085.5	37.3	3.5	40.8	74.0	-33.2	Peak	Horizontal
	4808.0	39.4	5.9	45.3	74.0	-28.7	Peak	Horizontal
*	5785.5	37.4	7.5	44.9	82.0	-37.1	Peak	Horizontal
*	7086.0	36.3	11.9	48.2	82.0	-33.8	Peak	Horizontal
	4128.0	37.6	3.8	41.4	74.0	-32.6	Peak	Vertical
	5029.0	37.6	6.4	44.0	74.0	-30.0	Peak	Vertical
*	6635.5	36.3	10.1	46.4	82.0	-35.6	Peak	Vertical
*	10180.0	34.3	17.1	51.4	82.0	-30.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (102.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/17
Test Mode:	BLE	Test Channel:	19
Remark:	1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4264.0	37.6	4.2	41.8	74.0	-32.2	Peak	Horizontal
	4833.5	36.8	5.9	42.7	74.0	-31.3	Peak	Horizontal
*	6567.5	35.8	10.2	46.0	81.9	-35.9	Peak	Horizontal
*	10452.0	35.4	17.2	52.6	81.9	-29.3	Peak	Horizontal
	4077.0	37.5	3.5	41.0	74.0	-33.0	Peak	Vertical
	5020.5	36.0	6.4	42.4	74.0	-31.6	Peak	Vertical
*	6049.0	35.8	7.9	43.7	81.9	-38.2	Peak	Vertical
*	7188.0	35.6	12.5	48.1	81.9	-33.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (101.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	AC1	Test Date	2018/09/17
Test Mode:	BLE	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4017.5	38.4	3.4	41.8	74.0	-32.2	Peak	Horizontal
	5054.5	37.2	6.5	43.7	74.0	-30.3	Peak	Horizontal
*	5998.0	36.1	8.0	44.1	81.5	-37.4	Peak	Horizontal
*	7188.0	34.7	12.5	47.2	81.5	-34.3	Peak	Horizontal
	4068.5	37.7	3.5	41.2	74.0	-32.8	Peak	Vertical
	5054.5	37.5	6.5	44.0	74.0	-30.0	Peak	Vertical
*	6584.5	35.9	10.2	46.1	81.5	-35.4	Peak	Vertical
*	9874.0	34.0	16.8	50.8	81.5	-30.7	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (101.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC1	Time: 2018/09/17 - 22:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 110V/60Hz
Worse Case Mode: Transmit by BLE at channel 2480MHz	

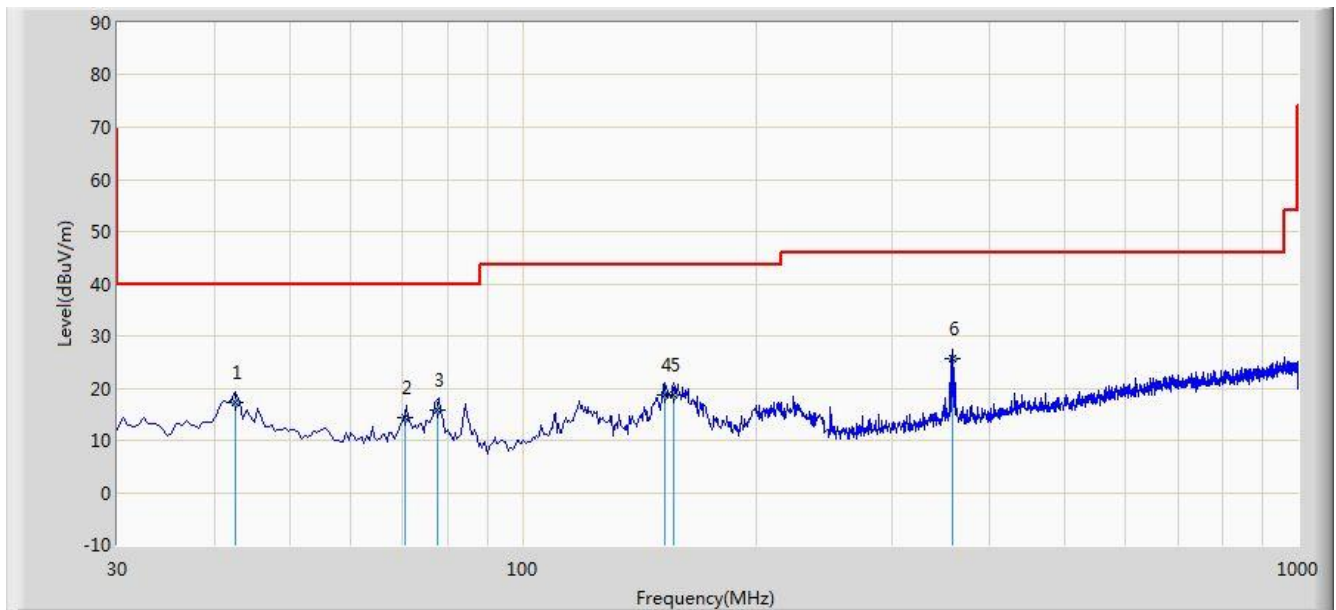


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			42.640	17.311	2.860	-22.689	40.000	14.451	QP
2			70.650	14.482	2.980	-25.518	40.000	11.502	QP
3			77.530	15.738	5.260	-24.262	40.000	10.478	QP
4			152.480	18.759	3.470	-24.741	43.500	15.289	QP
5			156.640	18.556	3.260	-24.944	43.500	15.296	QP
6		*	358.620	25.580	9.840	-20.420	46.000	15.740	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2018/09/17 - 22:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 110V/60Hz
Worse Case Mode: Transmit by BLE at channel 2480MHz	

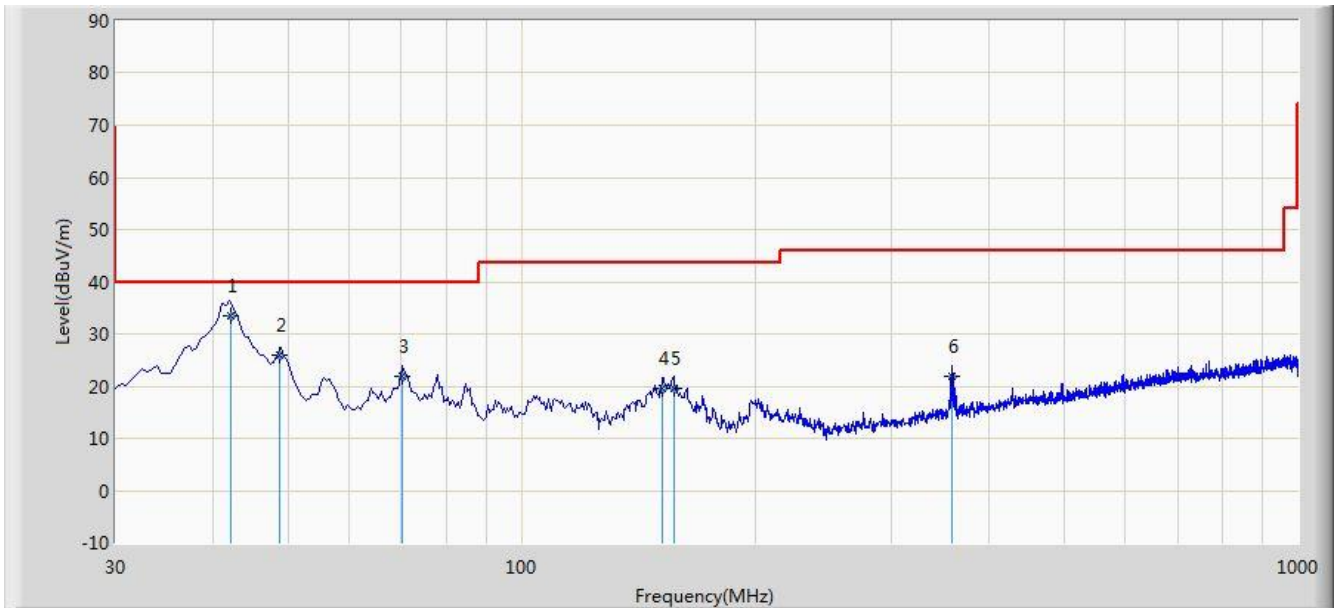

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	42.150	33.448	18.960	-6.552	40.000	14.488	QP
2			48.870	26.070	11.860	-13.930	40.000	14.210	QP
3			70.210	21.811	10.240	-18.189	40.000	11.571	QP
4			151.640	19.606	4.320	-23.894	43.500	15.286	QP
5			157.030	19.556	4.260	-23.944	43.500	15.296	QP
6			358.840	21.995	6.250	-24.005	46.000	15.745	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

5.5. 混附發射之 RF 傳導發射

5.5.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.5 節，使用頻帶範圍外之任意 100 千赫 (kHz) 內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz) 內的射頻功率，至少須衰減 20 dB，以射頻傳導或輻射方式測量。如發射機以本節 3.10.1(2)(2.3) 之峰值傳導輸出功率量測方式者，至少須衰減 30 dB。此外，落於第 2.7 節禁用頻段之輻射發射，應符合第 2.8 節之規定。


5.5.2. 量測方法

依據國家通訊傳播委員會低功率射頻電機技術規範之附件三，頻率跳頻展頻系統檢測之參考程式七 混附發射之 RF 傳導發射：

(一) 頻譜分析儀設定如下：

1. 頻率掃描範圍足以檢測頻帶內的發射波峰位準以及由受測物產生之最低頻率到第 10 次諧波的所有混附發射，通常需要分幾段以涵蓋全部頻率範圍。
2. 解析頻寬為 100kHz，視訊頻寬不小於解析頻寬。
3. 掃描時間為自動，檢波功能為峰值，訊號軌跡為最大保留(Max Hold)。
4. 將標記設定於任何欲紀錄之波峰上，所顯示之位準值必須符合指定之限制值。


5.5.3. 測試架構圖

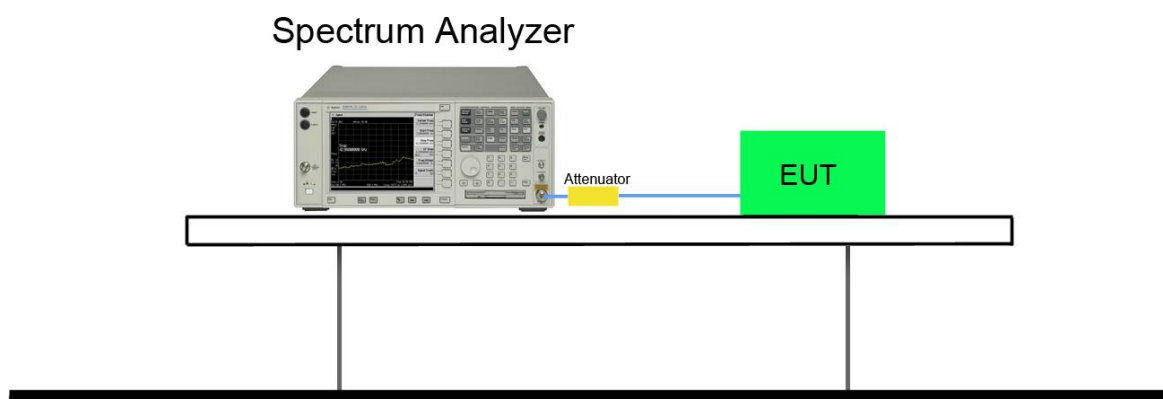

5.5.4. 混附發射之 RF 傳導發射測試結果

Product	ACCESS POINT	Temperature	23°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	SR2	Test Date	2018/09/07
Test Item	Conducted Band Edge and Out-of-Band Emissions		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
BLE	1	00	2402	20dBc	Pass
BLE	1	19	2440	20dBc	Pass
BLE	1	39	2480	20dBc	Pass

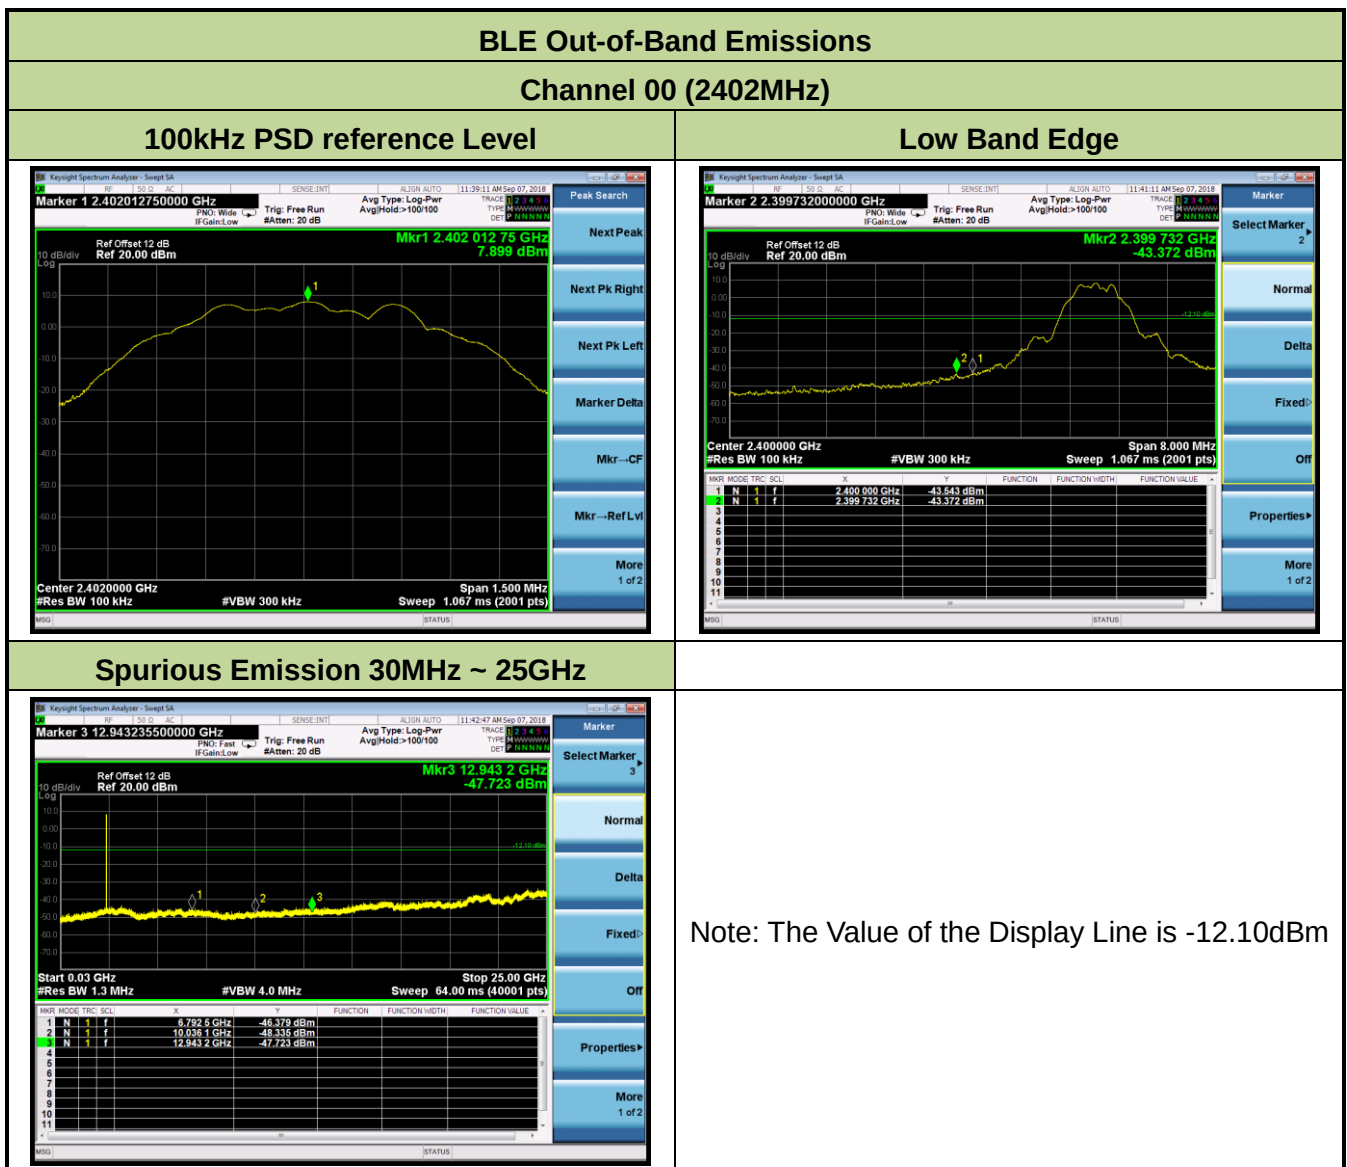

Channel 19 (2440MHz)

100kHz PSD reference Level




Spurious Emission 30MHz ~ 25GHz




Note: The Value of the Display Line is -12.12dBm

Channel 39 (2480MHz)


100kHz PSD reference Level

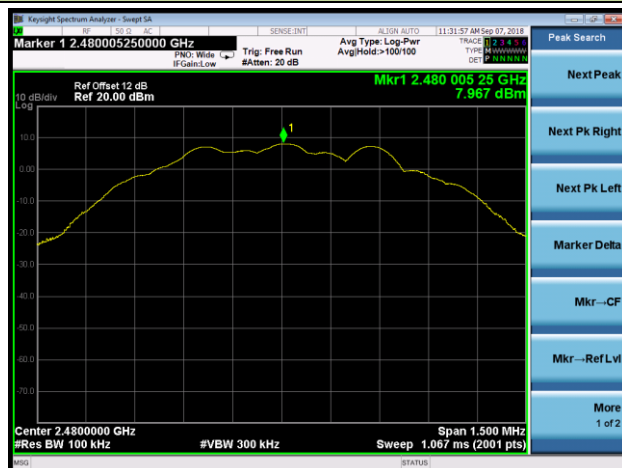

High Band Edge

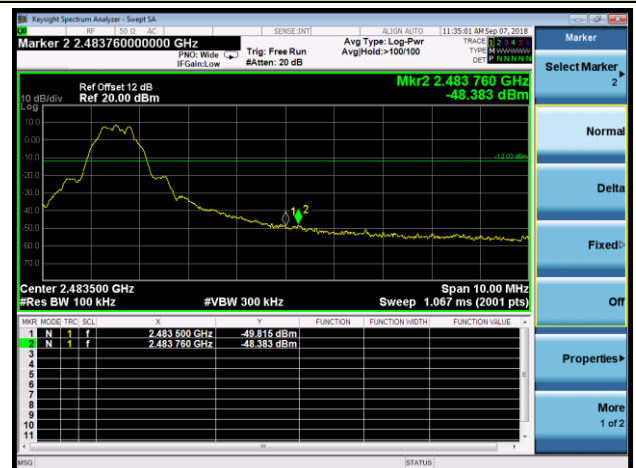

Spurious Emission 30MHz ~ 25GHz

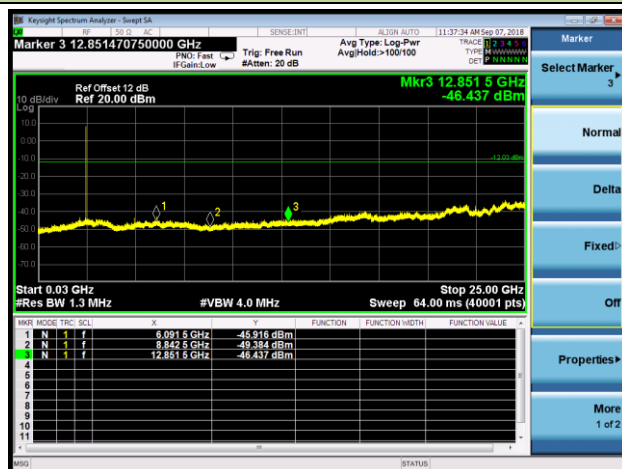

Note: The Value of the Display Line is -12.03dBm

5.6. 開放頻帶邊緣之不必要幅射要求

5.6.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.5 節，使用頻帶範圍外之任意 100 千赫 (kHz) 內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz) 內的射頻功率，衰減值限制如下：

(1) 輸出功率以低功率射頻電機技術規範附件二之峰值輸出功率方式量測者，至少須衰減 20 dB，可使用射頻傳導或輻射方式測量。

(2) 輸出功率以低功率射頻電機技術規範 3.10.1(2)(2.3) 之最大傳導輸出功率量測方式者，至少須衰減 30 dB。

此外，落於第 2.7 節禁用頻段之輻射發射，應符合第 2.8 節之規定(限制要求如下)：

發射依據國家通訊傳播委員會低功率射頻電機技術規範之第 2.8 節，低功率射頻電機，除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。各頻段重疊處，以較嚴格之限制值為準。


頻 率(兆赫)	電場強度(微伏/公尺)	測距(公尺)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

上表規定之電場強度，頻率在 9-90kHz 千赫(kHz)、110-490 千赫(kHz)以及 1000 兆赫(MHz)以上之發射，其量測以平均值檢波器為基準，且須符合第 5.14 節之規定；其他頻率之發射，應以 CISPR 準峰值(quasi-peak) 檢波器測量；非以上表所指定之距離測量時須符合第 5.5 節之規定，而輻射發射之量測頻率範圍須符合第 5.12 節之規定。

5.6.2. 量測方法

待測物置於高 80 公分之非導體桌面（落地型產品置於地上），受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。


5.6.3. 測試架構圖

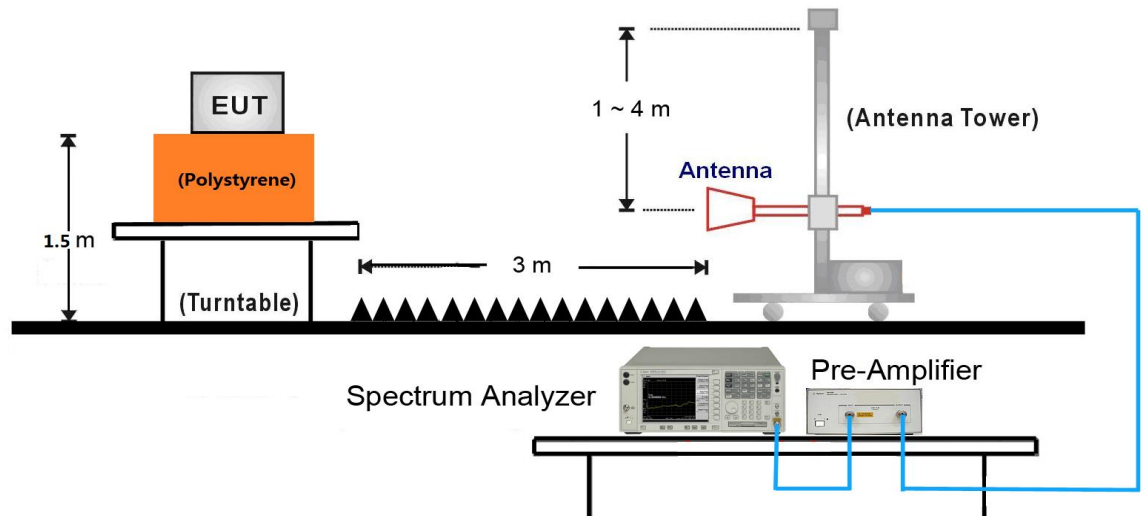

備註: 使用頻率範圍外之任意 100 千赫雜訊，使用輻射方式測量，6 dB 頻寬使用 1MHz 遠大於 100kHz 仍可 PASS，檢附其測試數據。

5.6.4. 測試結果

Site: AC1	Time: 2018/09/17 - 23:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 110V/60Hz
Test Mode: Transmit by BLE at channel 2402MHz	

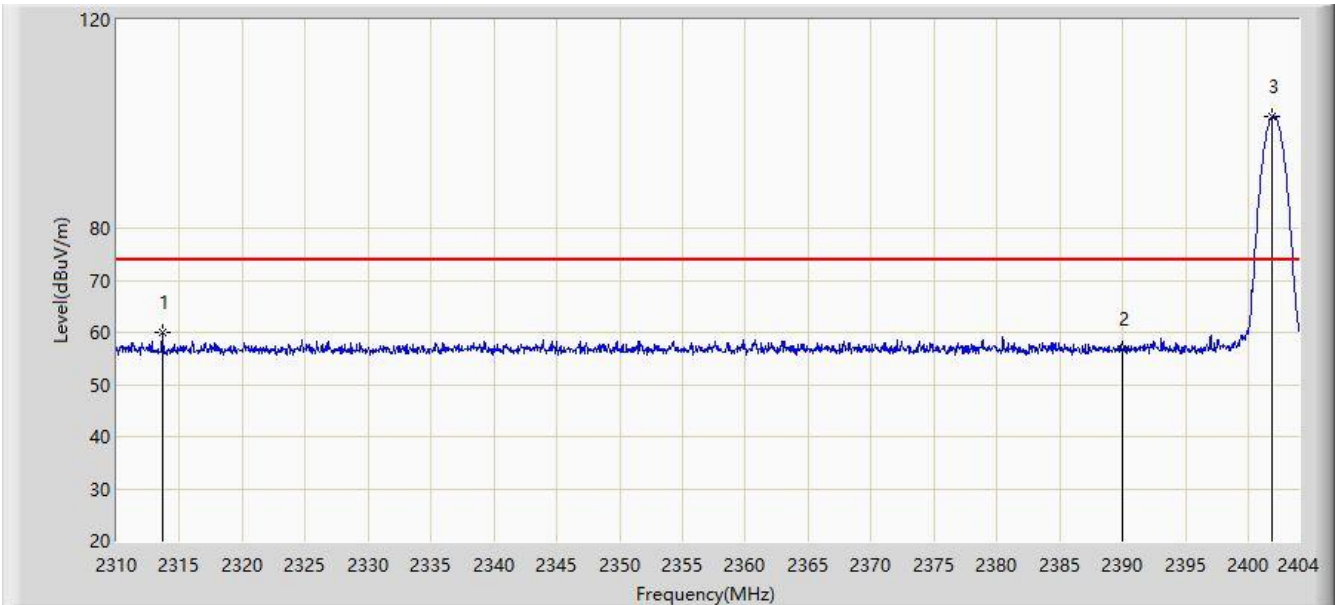


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2313.619	59.914	27.375	-14.086	74.000	32.540	PK
2			2390.000	56.840	24.513	-17.160	74.000	32.327	PK
3		*	2401.885	101.359	69.054	N/A	N/A	32.305	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/09/17 - 23:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 110V/60Hz
Test Mode: Transmit by BLE at channel 2402MHz	

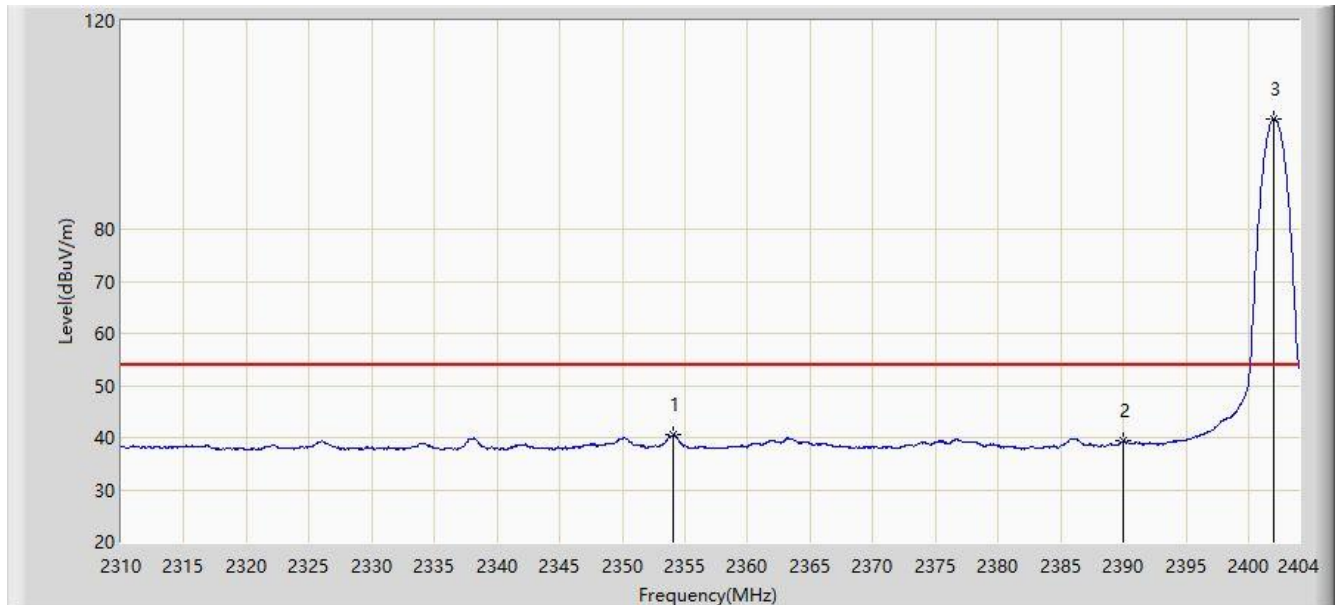


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2354.086	40.510	8.121	-13.490	54.000	32.389	AV
2			2390.000	39.290	6.963	-14.710	54.000	32.327	AV
3		*	2402.026	101.185	68.881	N/A	N/A	32.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/09/17 - 23:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 110V/60Hz
Test Mode: Transmit by BLE at channel 2402MHz	

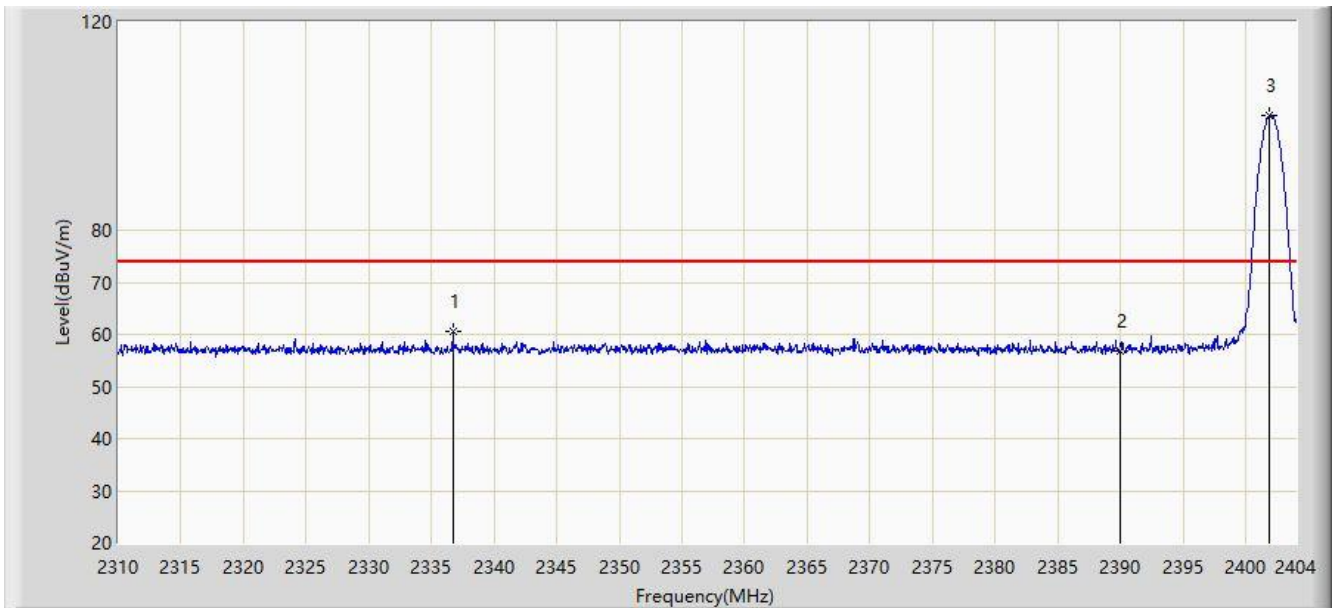


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2336.696	60.556	28.111	-13.444	74.000	32.445	PK
2			2390.000	56.842	24.515	-17.158	74.000	32.327	PK
3		*	2401.885	101.985	69.680	N/A	N/A	32.305	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/09/17 - 23:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 110V/60Hz
Test Mode: Transmit by BLE at channel 2402MHz	

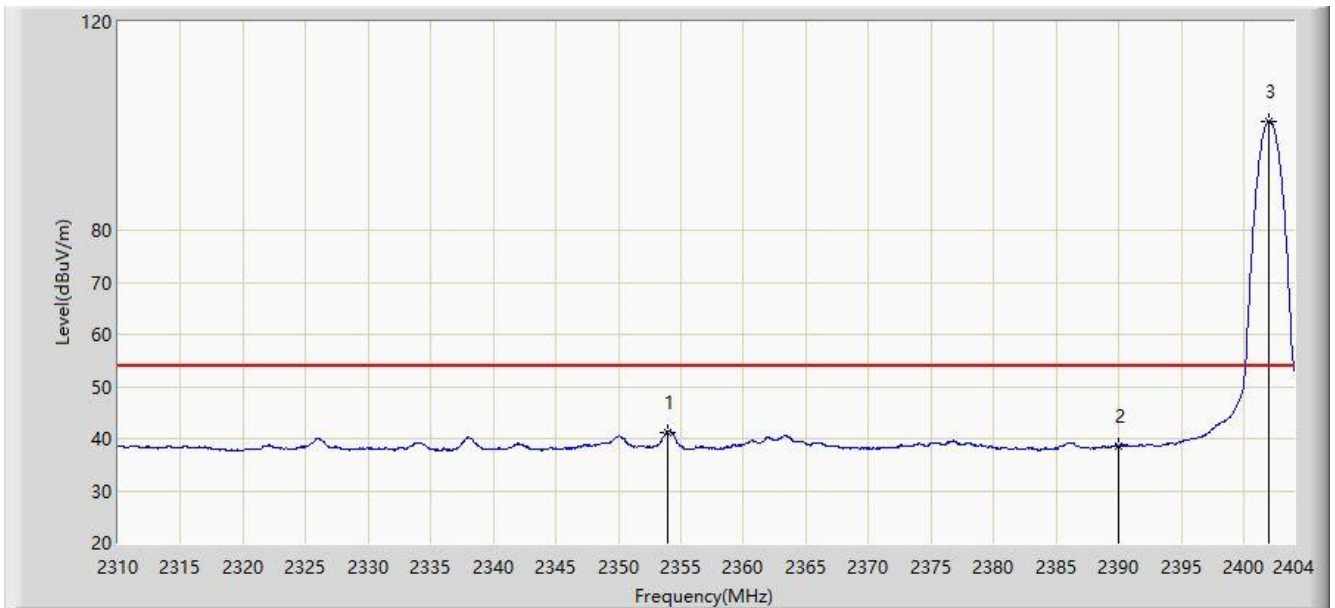


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2353.945	41.295	8.905	-12.705	54.000	32.389	AV
2			2390.000	38.646	6.319	-15.354	54.000	32.327	AV
3		*	2401.979	100.944	68.640	N/A	N/A	32.305	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/09/17 - 23:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 110V/60Hz
Test Mode: Transmit by BLE at channel 2480MHz	

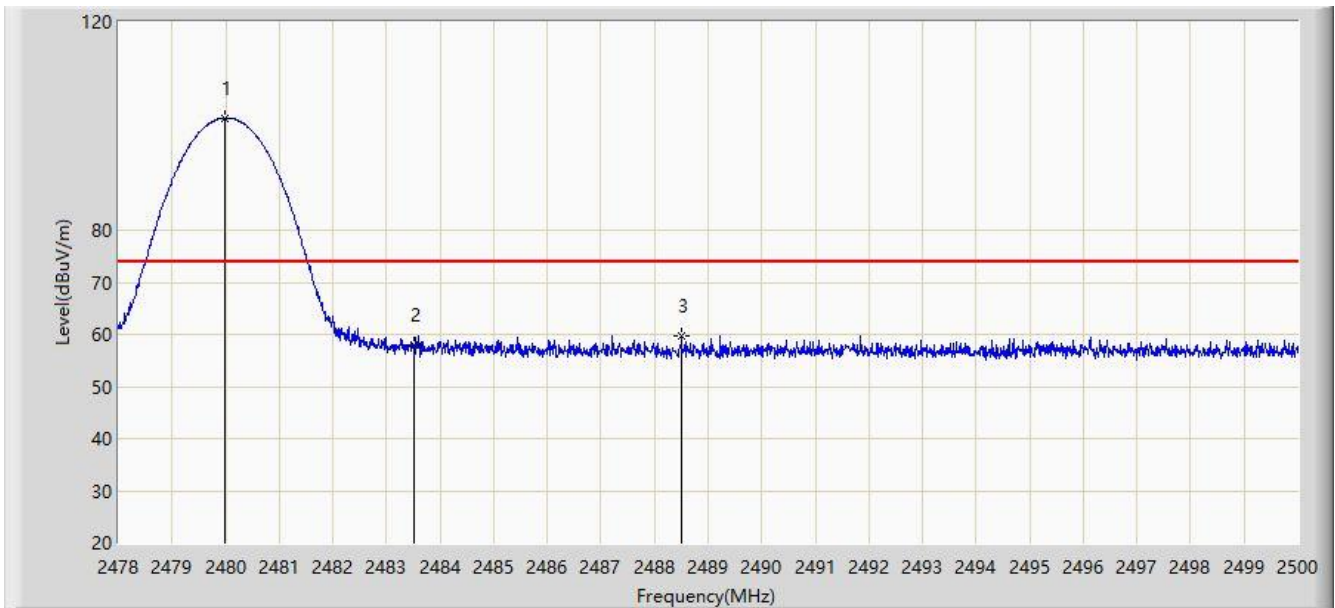


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.980	101.528	69.203	N/A	N/A	32.325	PK
2			2483.500	58.056	25.717	-15.944	74.000	32.340	PK
3			2488.505	59.613	27.254	-14.387	74.000	32.359	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/09/17 - 23:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 110V/60Hz
Test Mode: Transmit by BLE at channel 2480MHz	

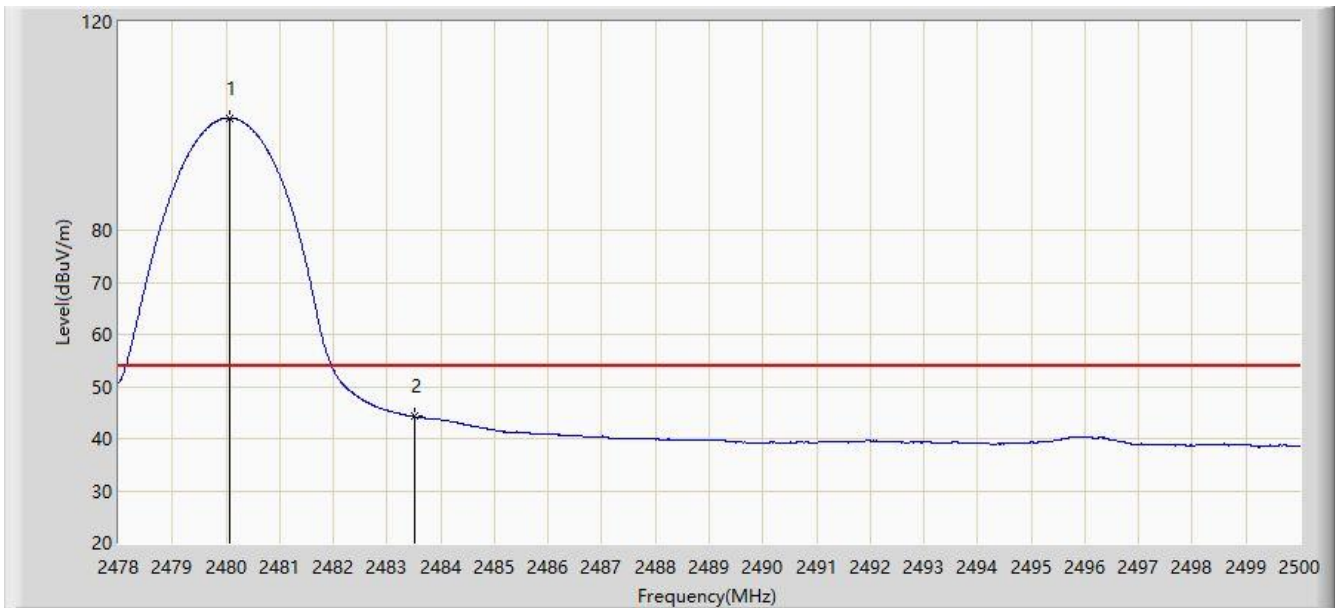


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.068	101.541	69.215	N/A	N/A	32.325	AV
2			2483.500	44.214	11.875	-9.786	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/09/17 - 23:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 110V/60Hz
Test Mode: Transmit by BLE at channel 2480MHz	

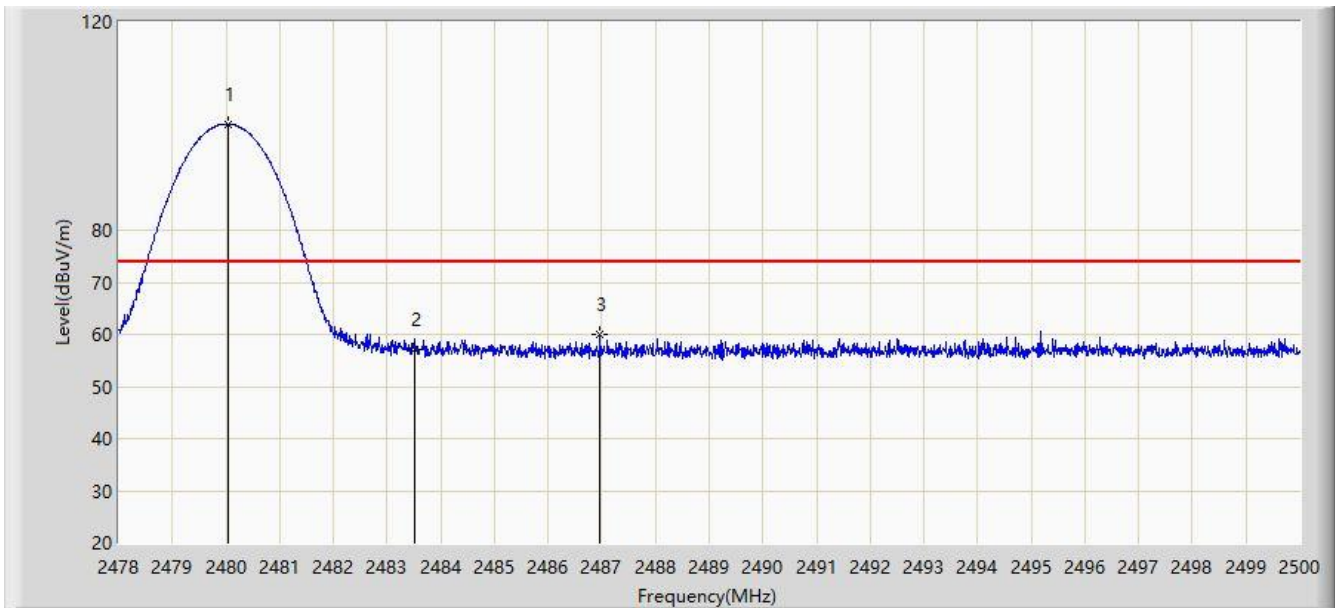


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.035	100.407	68.081	N/A	N/A	32.325	PK
2			2483.500	57.167	24.828	-16.833	74.000	32.340	PK
3			2486.965	59.860	27.507	-14.140	74.000	32.353	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/09/17 - 23:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 110V/60Hz
Test Mode: Transmit by BLE at channel 2480MHz	

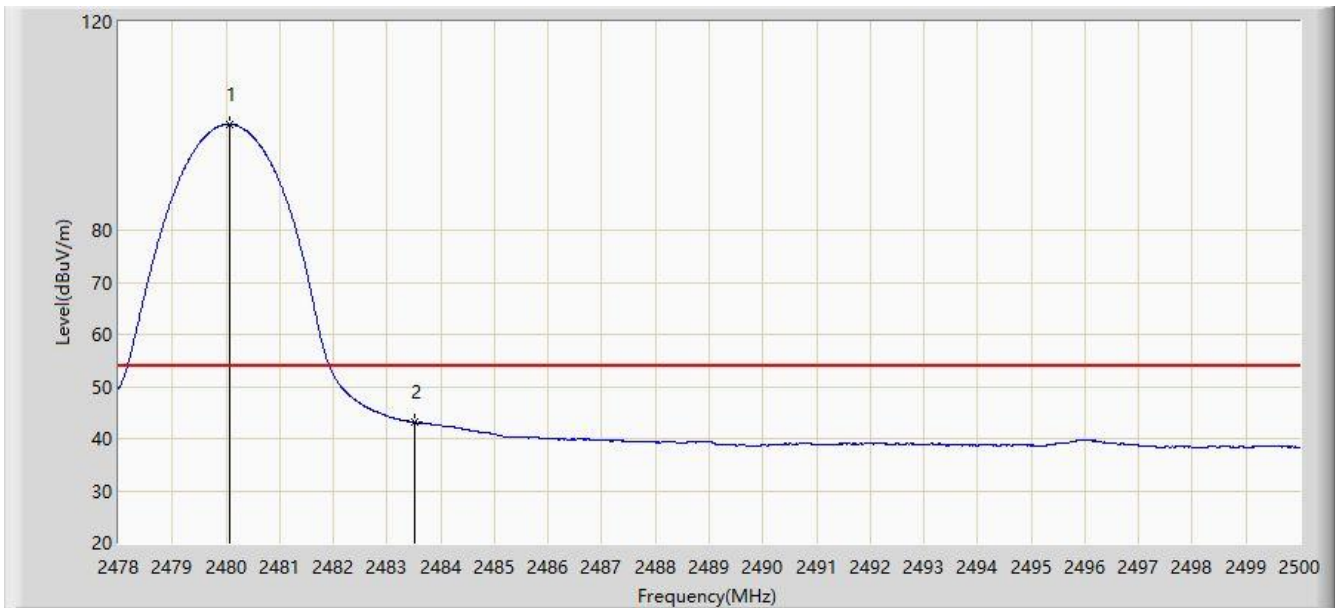

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.068	100.311	67.985	N/A	N/A	32.325	AV
2			2483.500	43.067	10.728	-10.933	54.000	32.340	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

5.7. 佔用頻道寬度

5.7.1. 適用標準


依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.6(2)(A)節之要求，6dB 頻寬至少應有 500kHz。

5.7.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端，設定頻譜分析儀之解析度頻寬為 100kHz，視訊頻寬不小於解析度頻寬，頻率掃描範圍(SPAN)遠大於解析度頻寬。

待測物應在正常發射狀態下量測。


5.7.3. 測試架構圖

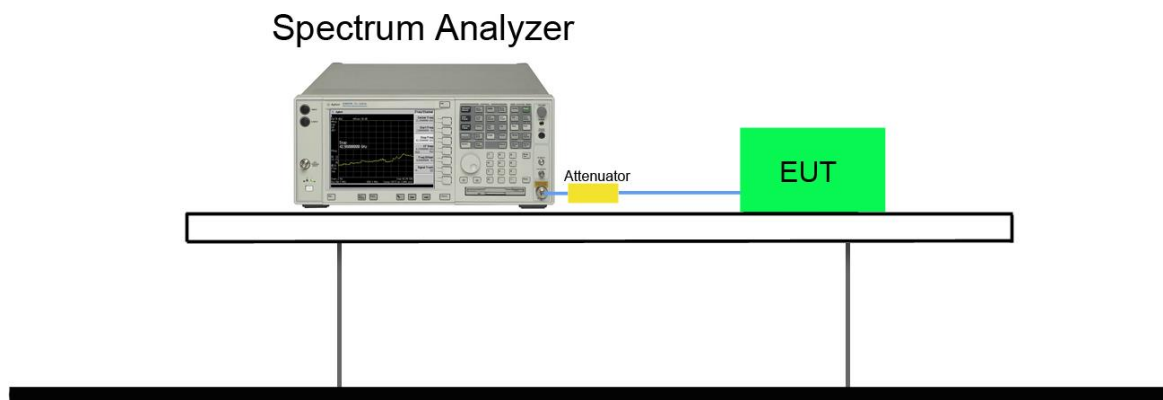

5.7.4. 佔用頻帶寬度測試結果

Product	ACCESS POINT	Temperature	23°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	SR2	Test Date	2018/09/07
Test Item	6dB Bandwidth		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
BLE	1	00	2402	0.694	≥ 0.5	Pass
BLE	1	19	2440	0.692	≥ 0.5	Pass
BLE	1	39	2480	0.690	≥ 0.5	Pass

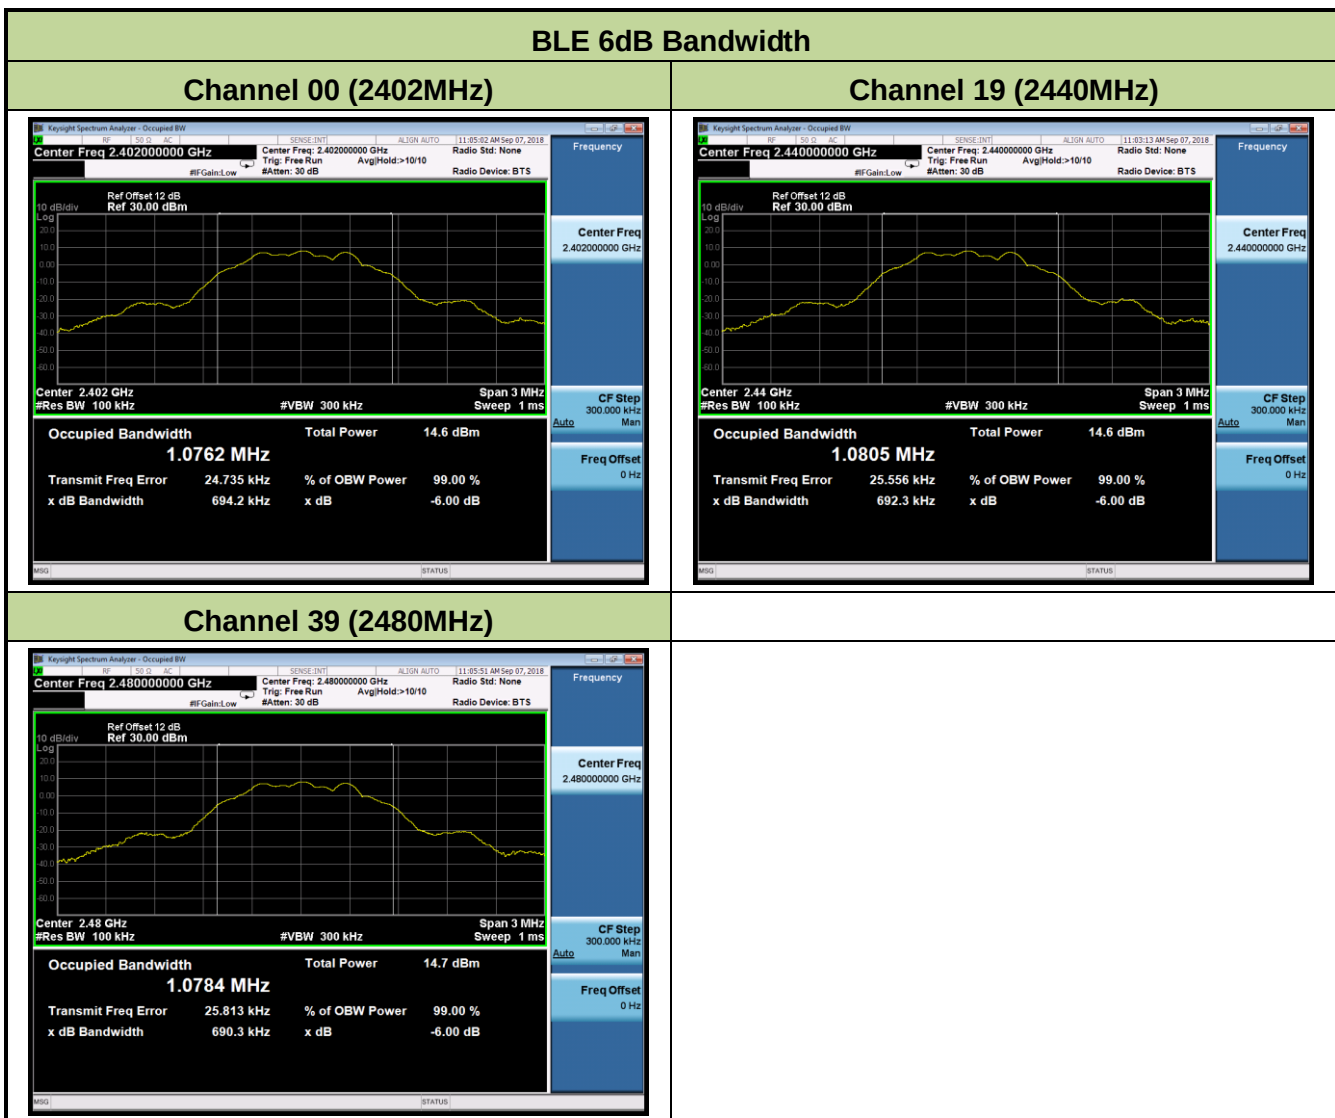

5.8. 發射電功率密度

5.8.1. 適用標準


依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.6(2)(B)節，在使用頻率範圍之任意 3 千赫(kHz)頻寬內，由發射機傳導至天線之峰值發射電功率密度在任意期間內，皆不得大於 8dBm。

5.8.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端。找出發射峰值並擴展於通帶內，設定頻譜分析儀之解析度頻寬為 3kHz，視訊頻寬大於解析度頻寬，掃瞄時間為頻率掃瞄範圍除以 3kHz。
(SWEEP TIME = SPAN/3kHz)。

待測物應在正常發射狀態下量測。


5.8.3. 測試架構圖

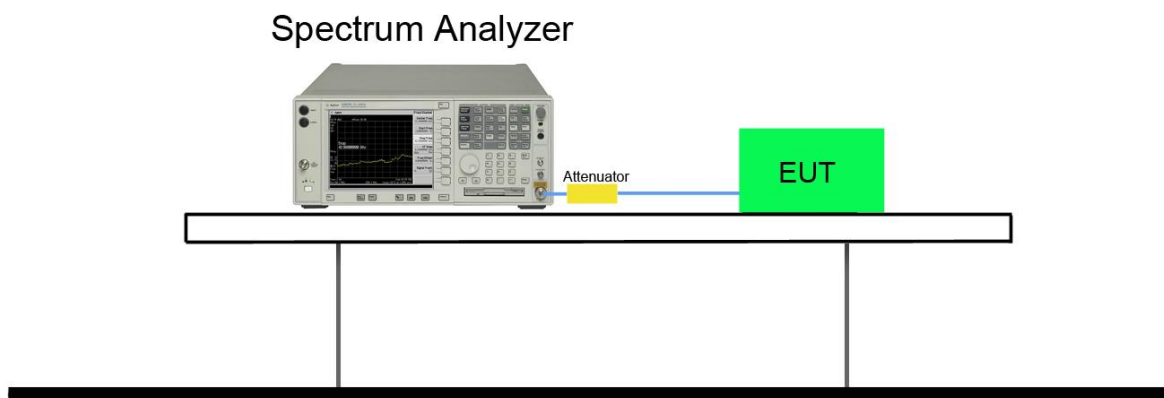

5.8.4. 功率密度量測結果

Product	ACCESS POINT	Temperature	23°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	SR2	Test Date	2018/09/07
Test Item	Power Spectral Density		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD Result (dBm/3kHz)	PSD Limit (dBm/3kHz)	Result
BLE	1	00	2402	-9.69	≤ 8.0	Pass
BLE	1	19	2440	-9.72	≤ 8.0	Pass
BLE	1	39	2480	-9.61	≤ 8.0	Pass

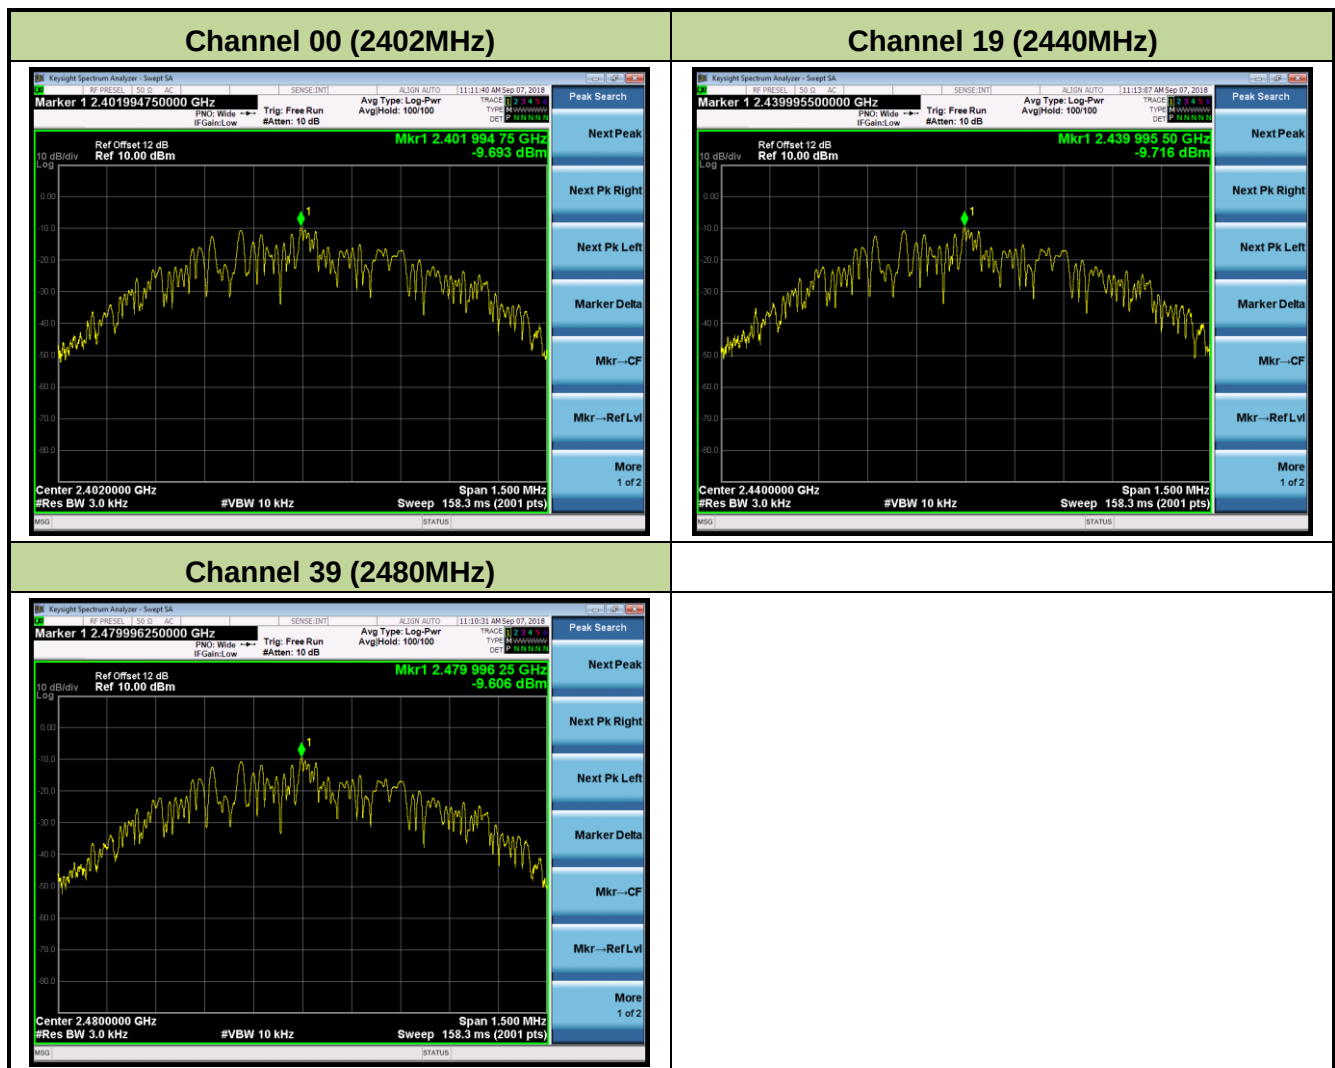

End