


Site: AC1	Time: 2020/04/24 - 14:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5260MHz with OAW-AP1362 (CDD Mode)	

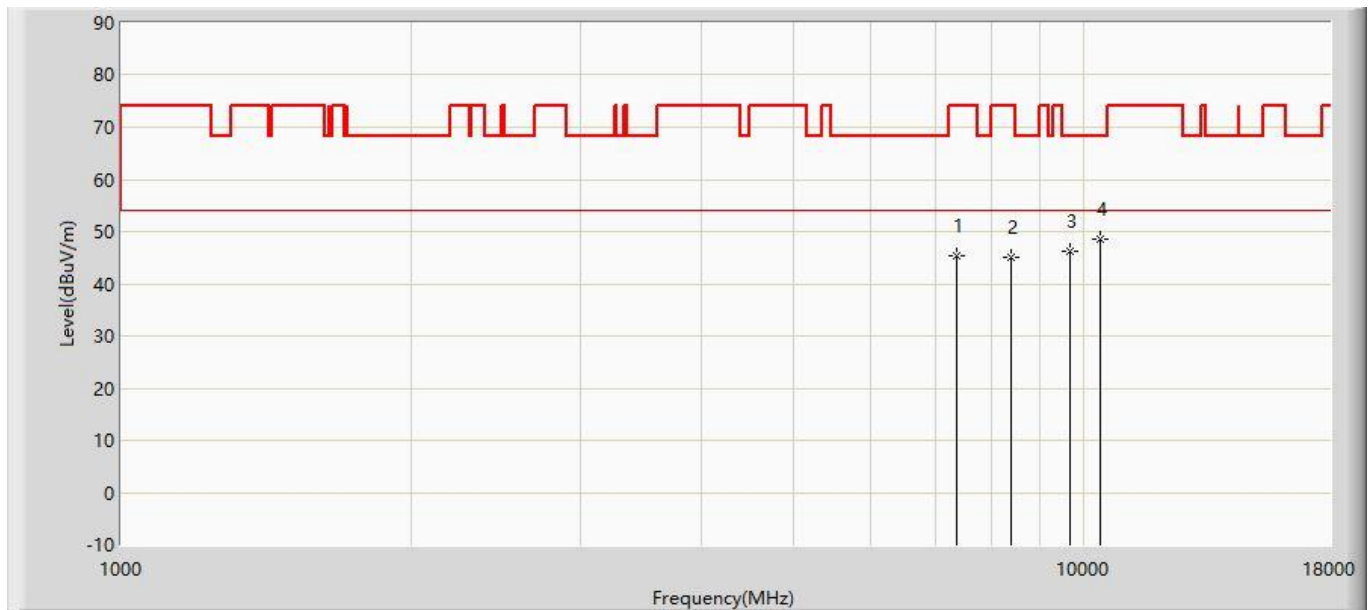


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7375.000	45.406	33.970	-28.594	74.000	11.436	PK
2			8395.000	45.198	32.790	-28.802	74.000	12.408	PK
3			9670.000	46.368	32.190	-21.832	68.200	14.178	PK
4		*	10392.500	48.591	32.068	-19.609	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5300MHz with OAW-AP1362 (CDD Mode)	

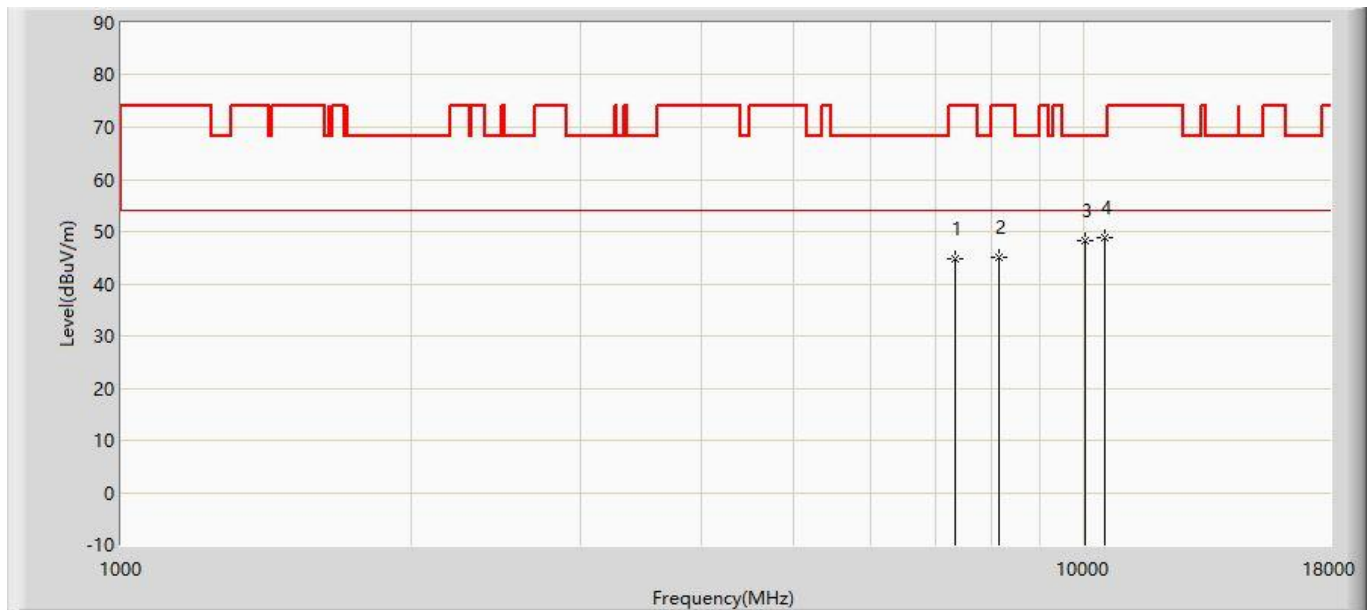


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7358.000	44.827	33.428	-29.173	74.000	11.399	PK
2			8165.500	45.203	32.899	-28.797	74.000	12.304	PK
3			10018.500	48.320	33.001	-19.880	68.200	15.318	PK
4		*	10494.500	48.915	32.066	-19.285	68.200	16.849	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5300MHz with OAW-AP1362 (CDD Mode)	

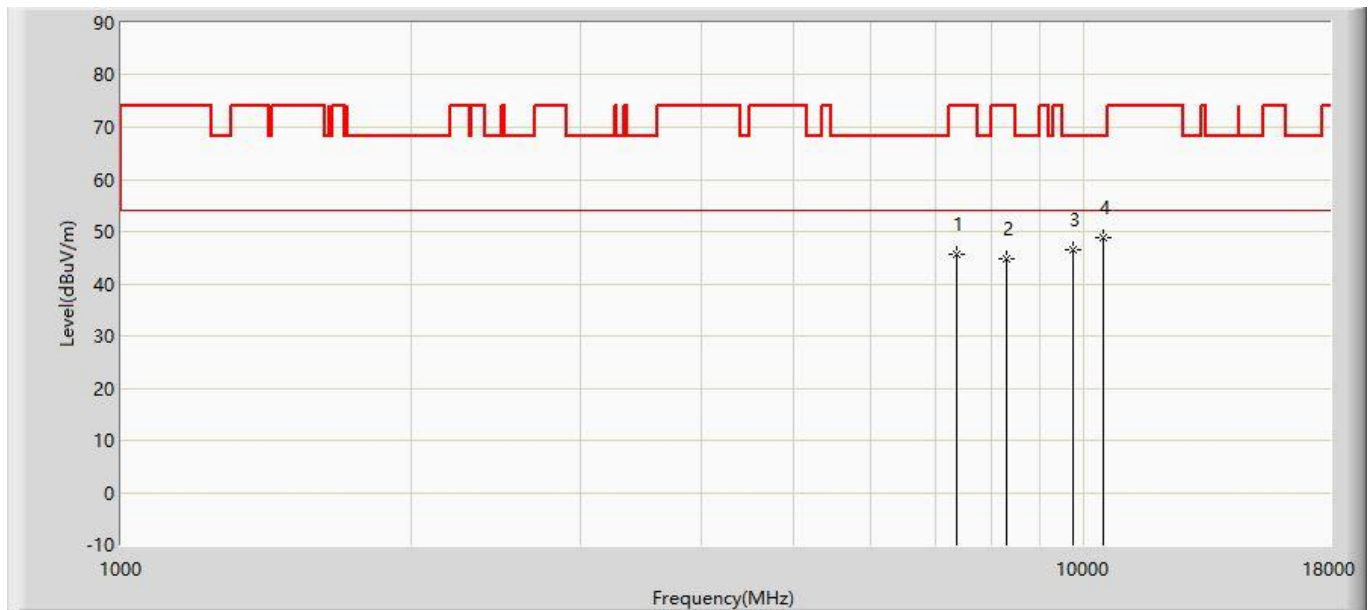


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7375.000	45.722	34.286	-28.278	74.000	11.436	PK
2			8293.000	44.646	32.284	-29.354	74.000	12.362	PK
3			9729.500	46.608	32.235	-21.592	68.200	14.373	PK
4		*	10469.000	48.811	32.041	-19.389	68.200	16.770	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz with OAW-AP1362 (CDD Mode)	

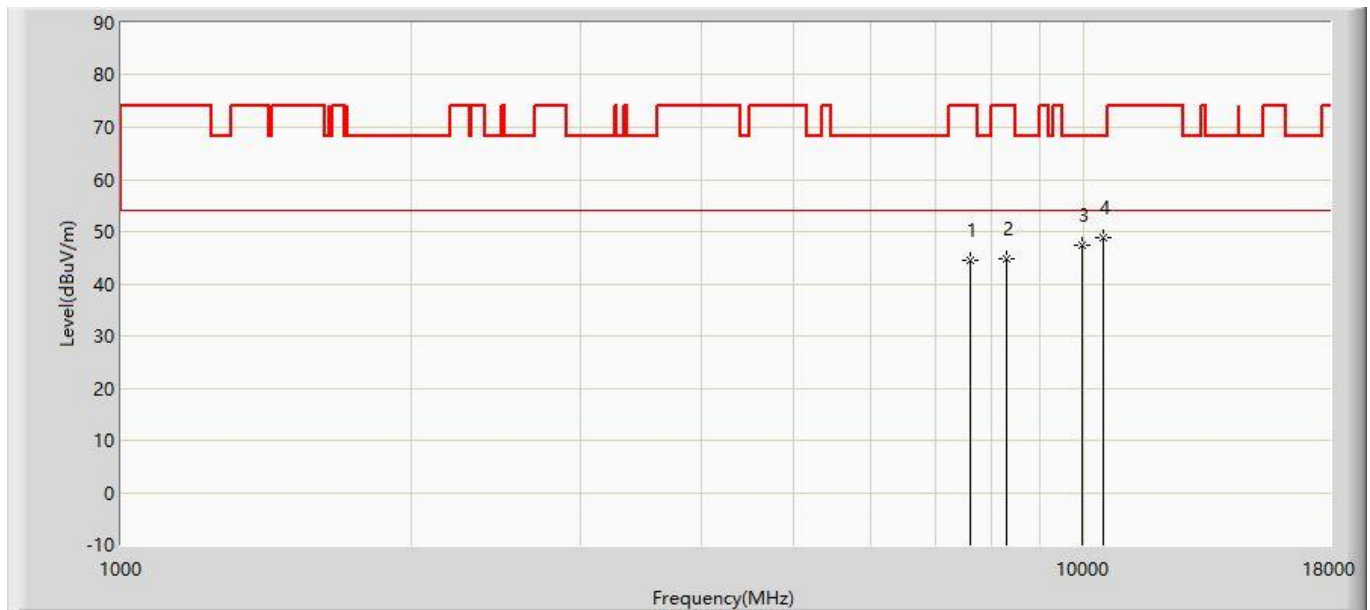


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7630.000	44.389	32.540	-29.611	74.000	11.849	PK
2			8293.000	44.646	32.284	-29.354	74.000	12.362	PK
3			9950.500	47.325	32.228	-20.875	68.200	15.097	PK
4		*	10469.000	48.811	32.041	-19.389	68.200	16.770	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz with OAW-AP1362 (CDD Mode)	

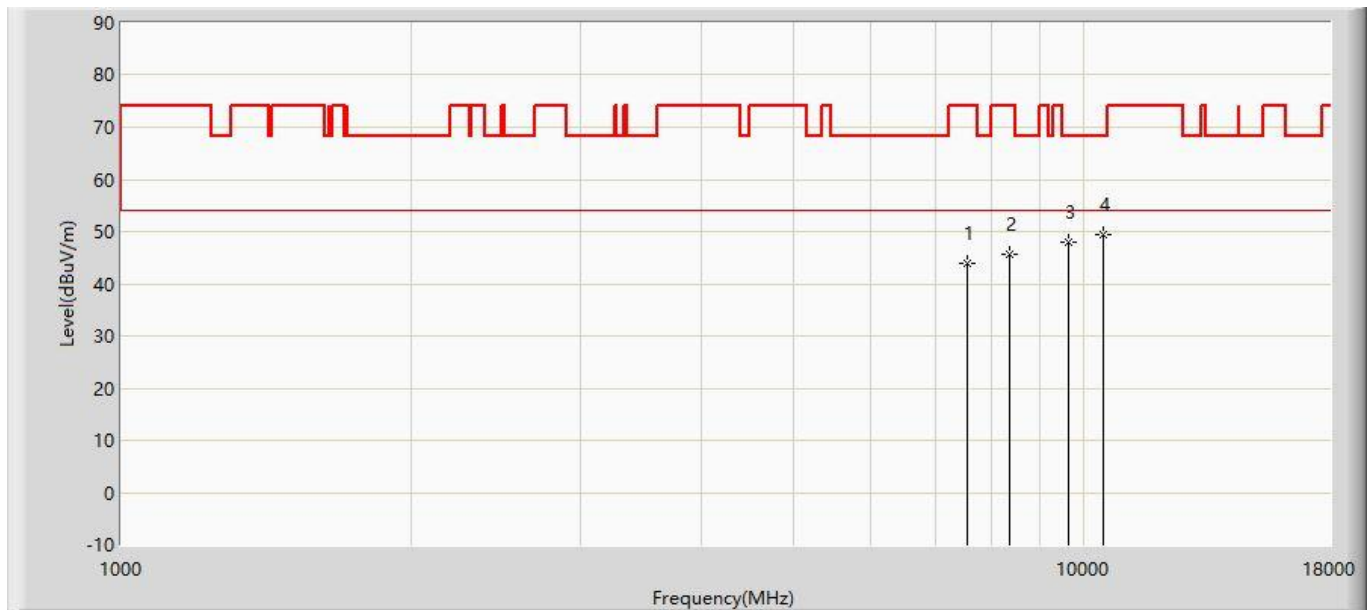


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7553.500	43.994	32.223	-30.006	74.000	11.771	PK
2			8378.000	45.538	33.137	-28.462	74.000	12.401	PK
3			9636.000	47.980	33.914	-20.220	68.200	14.066	PK
4		*	10486.000	49.278	32.453	-18.922	68.200	16.825	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz with OAW-AP1362 (CDD Mode)	

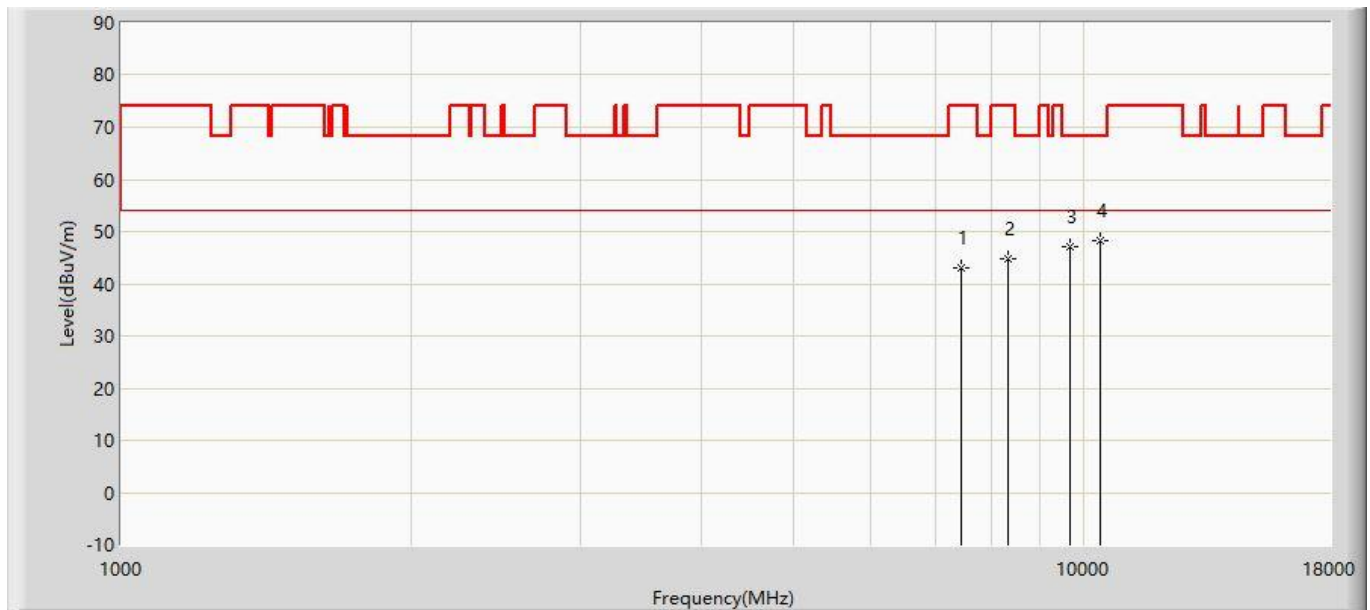


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7460.000	43.170	31.544	-30.830	74.000	11.626	PK
2			8327.000	44.757	32.380	-29.243	74.000	12.377	PK
3			9678.500	47.033	32.828	-21.167	68.200	14.205	PK
4		*	10384.000	48.258	31.762	-19.942	68.200	16.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz with OAW-AP1362 (CDD Mode)	

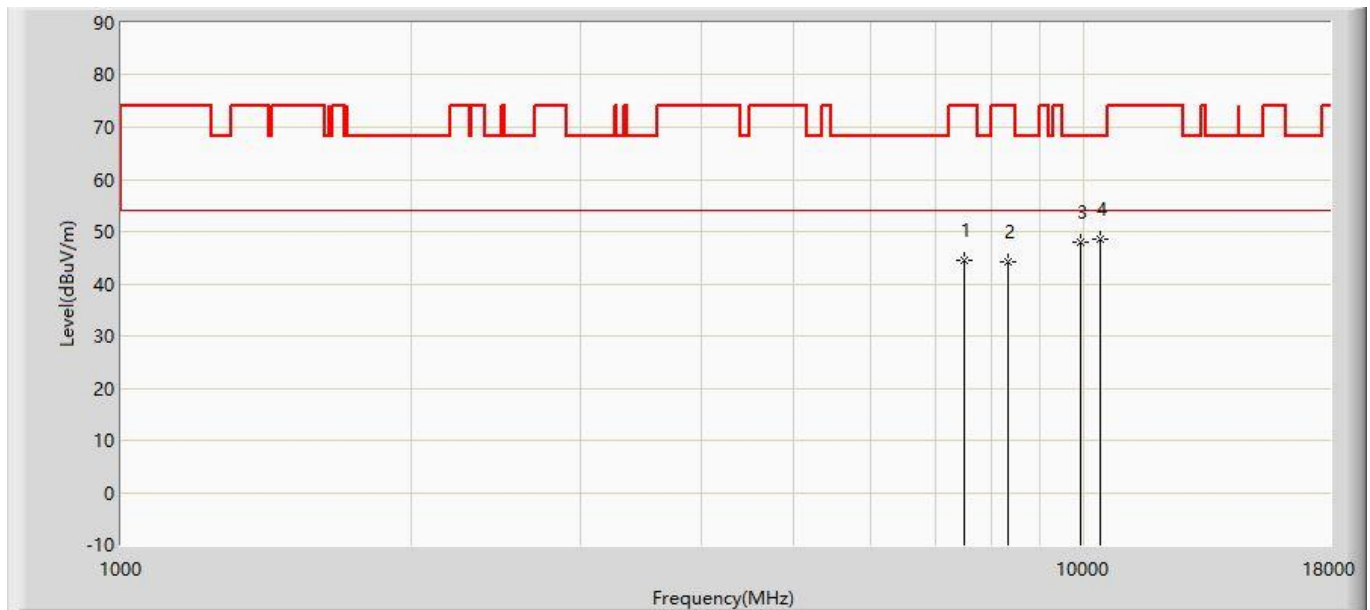


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7519.500	44.359	32.624	-29.641	74.000	11.734	PK
2			8335.500	44.252	31.871	-29.748	74.000	12.381	PK
3			9925.000	47.980	32.966	-20.220	68.200	15.014	PK
4		*	10392.500	48.547	32.024	-19.653	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5600MHz with OAW-AP1362 (CDD Mode)	

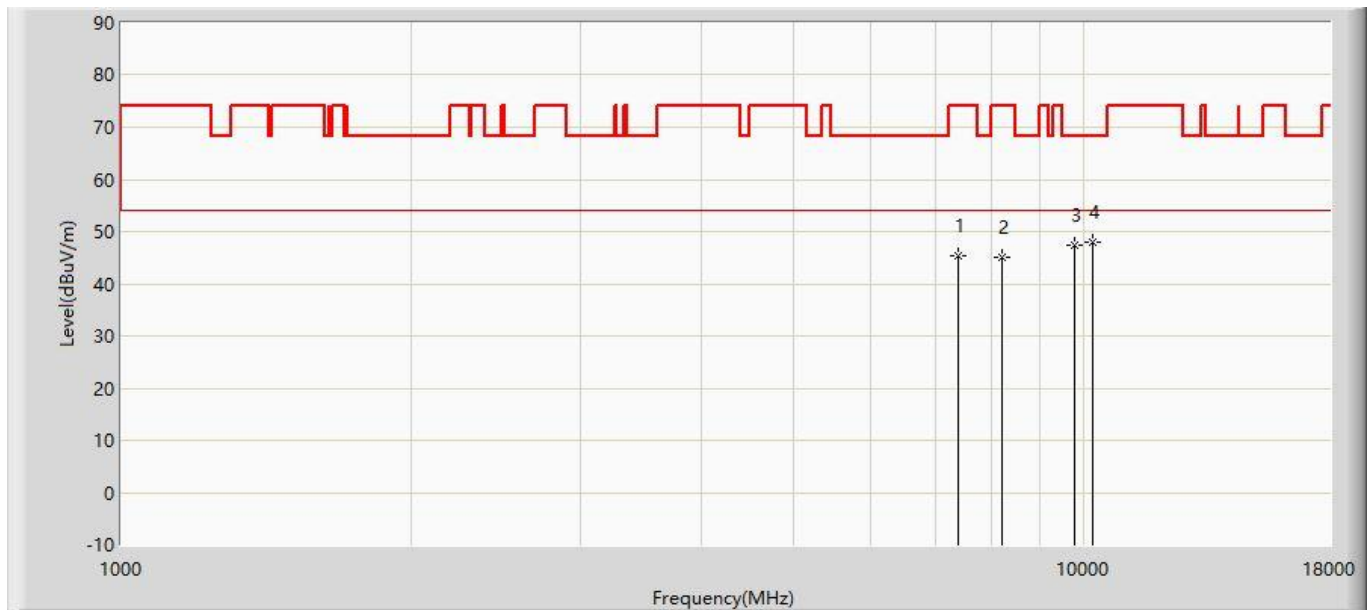


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7392.000	45.484	34.011	-28.516	74.000	11.473	PK
2			8225.000	45.197	32.865	-28.803	74.000	12.332	PK
3			9772.000	47.276	32.764	-20.924	68.200	14.512	PK
4		*	10197.000	48.035	32.141	-20.165	68.200	15.894	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5600MHz with OAW-AP1362 (CDD Mode)	

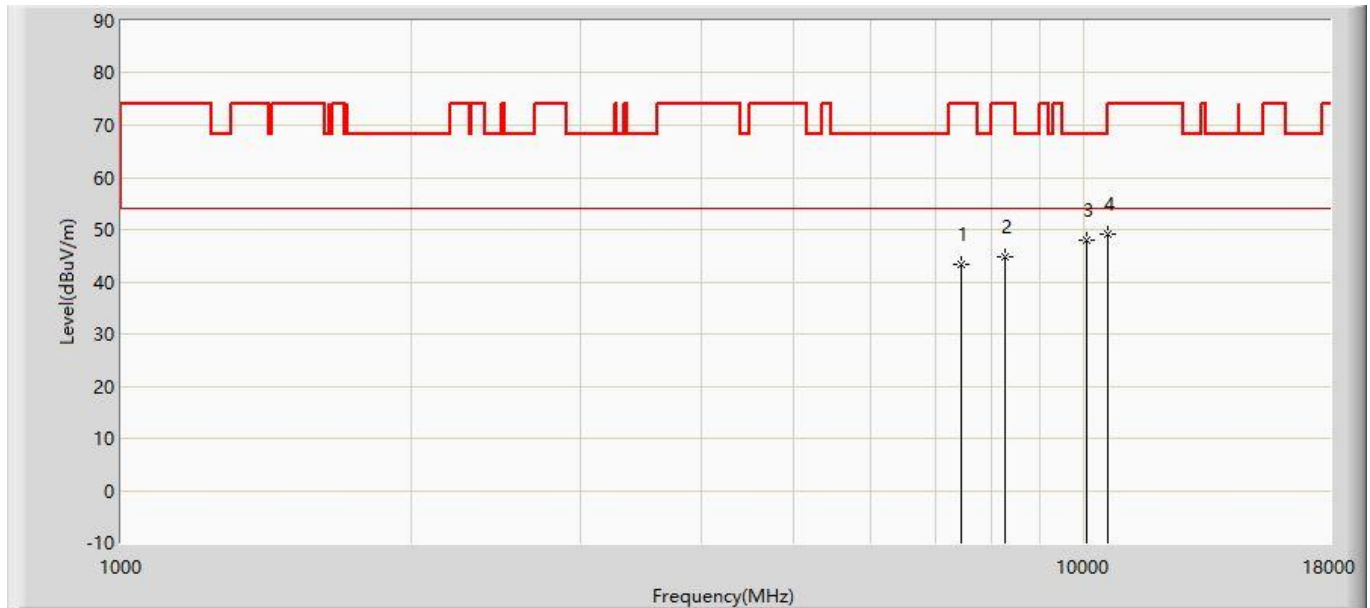


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7451.500	43.224	31.617	-30.776	74.000	11.607	PK
2			8267.500	44.895	32.545	-29.105	74.000	12.350	PK
3			10052.500	47.842	32.413	-20.358	68.200	15.428	PK
4		*	10571.000	49.022	32.051	-19.178	68.200	16.971	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz with OAW-AP1362 (CDD Mode)	

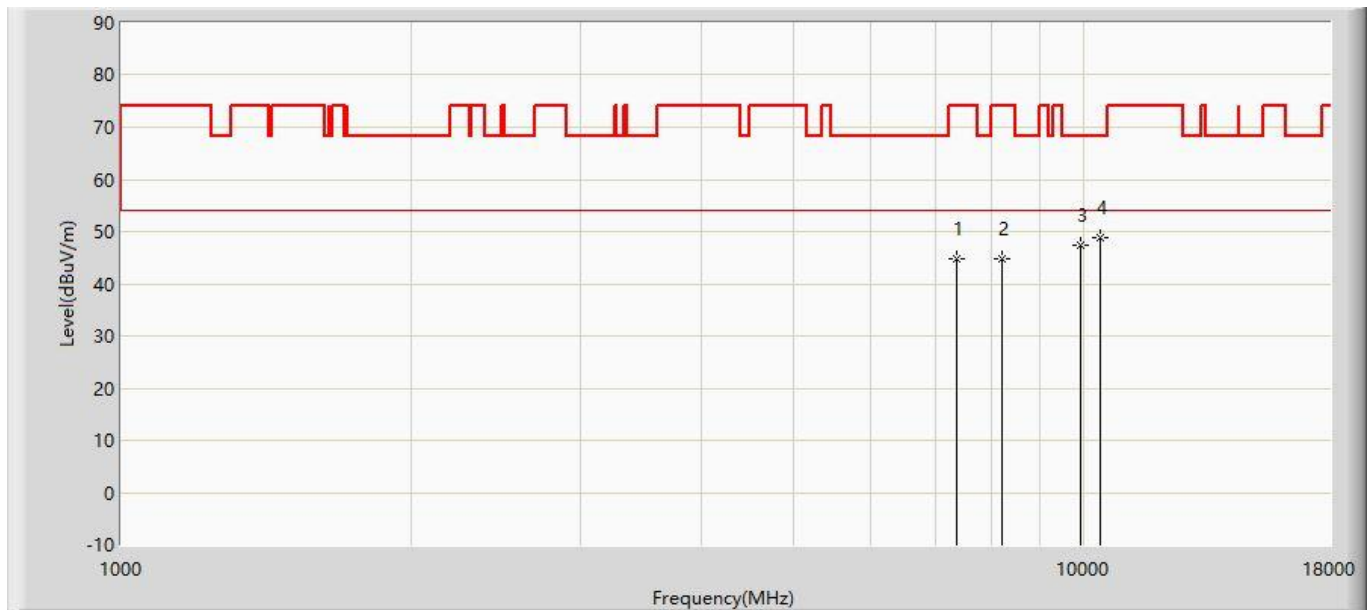


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7366.500	44.837	33.420	-29.163	74.000	11.418	PK
2			8216.500	44.701	32.373	-29.299	74.000	12.328	PK
3			9933.500	47.463	32.422	-20.737	68.200	15.041	PK
4		*	10392.500	48.914	32.391	-19.286	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz with OAW-AP1362 (CDD Mode)	

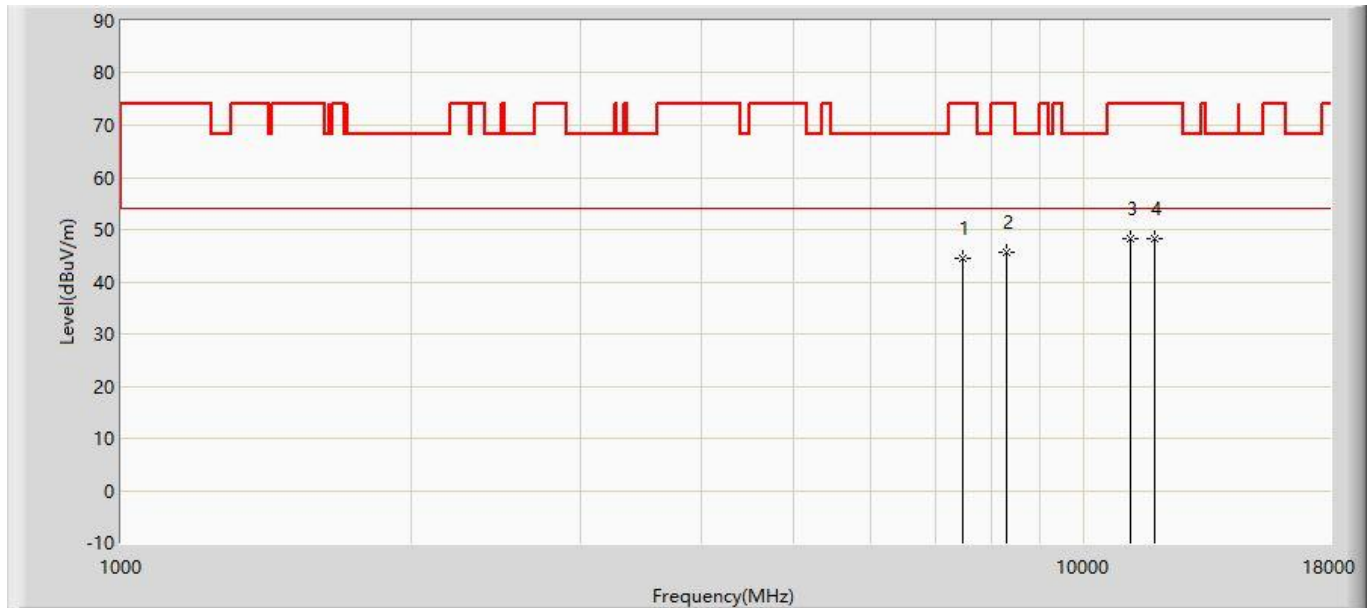


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	44.426	32.782	-29.574	74.000	11.644	PK
2			8301.500	45.601	33.235	-28.399	74.000	12.366	PK
3		*	11183.000	48.364	30.612	-25.636	74.000	17.752	PK
4			11820.500	48.328	30.426	-25.672	74.000	17.903	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5720MHz with OAW-AP1362 (CDD Mode)	

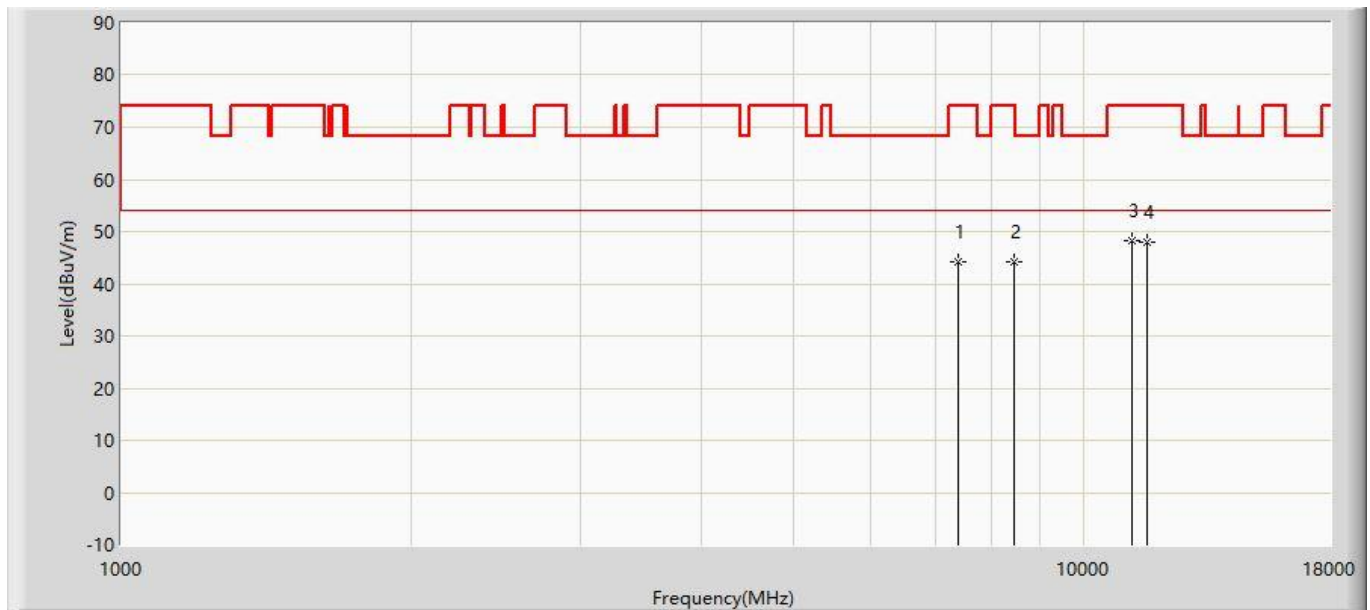


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	44.318	32.825	-29.682	74.000	11.493	PK
2			8446.000	44.241	31.810	-29.759	74.000	12.431	PK
3		*	11200.000	48.315	30.547	-25.685	74.000	17.768	PK
4			11642.000	48.020	30.035	-25.980	74.000	17.985	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5720MHz with OAW-AP1362 (CDD Mode)	

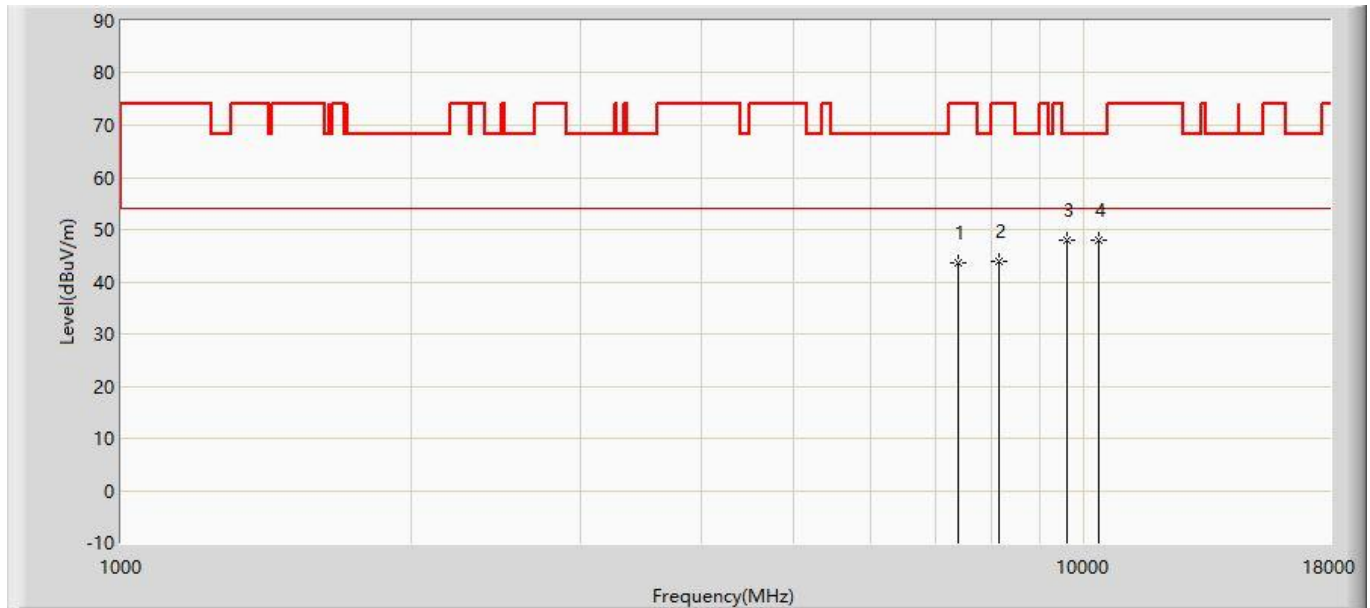


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	43.602	32.109	-30.398	74.000	11.493	PK
2			8148.500	44.026	31.729	-29.974	74.000	12.297	PK
3		*	9610.500	48.070	34.088	-20.130	68.200	13.982	PK
4			10358.500	47.963	31.549	-20.237	68.200	16.414	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz with OAW-AP1362 (CDD Mode)	

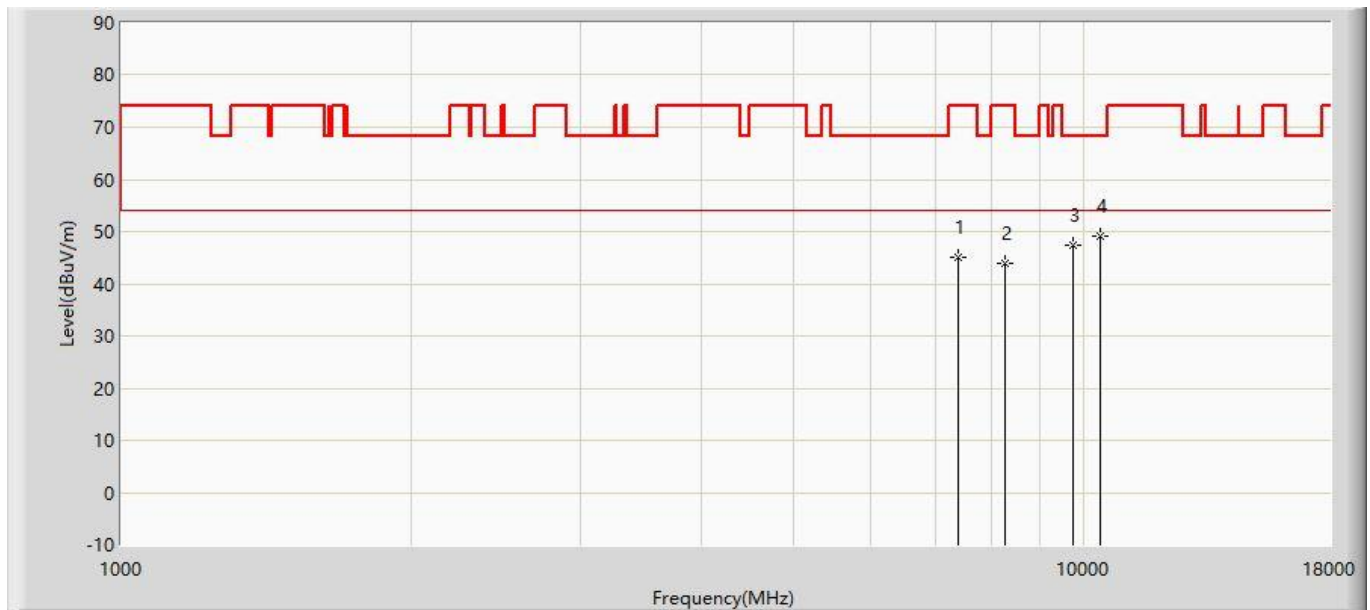


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	45.198	33.705	-28.802	74.000	11.493	PK
2			8276.000	43.833	31.479	-30.167	74.000	12.354	PK
3			9755.000	47.370	32.914	-20.830	68.200	14.456	PK
4		*	10392.500	49.224	32.701	-18.976	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz with OAW-AP1362 (CDD Mode)	

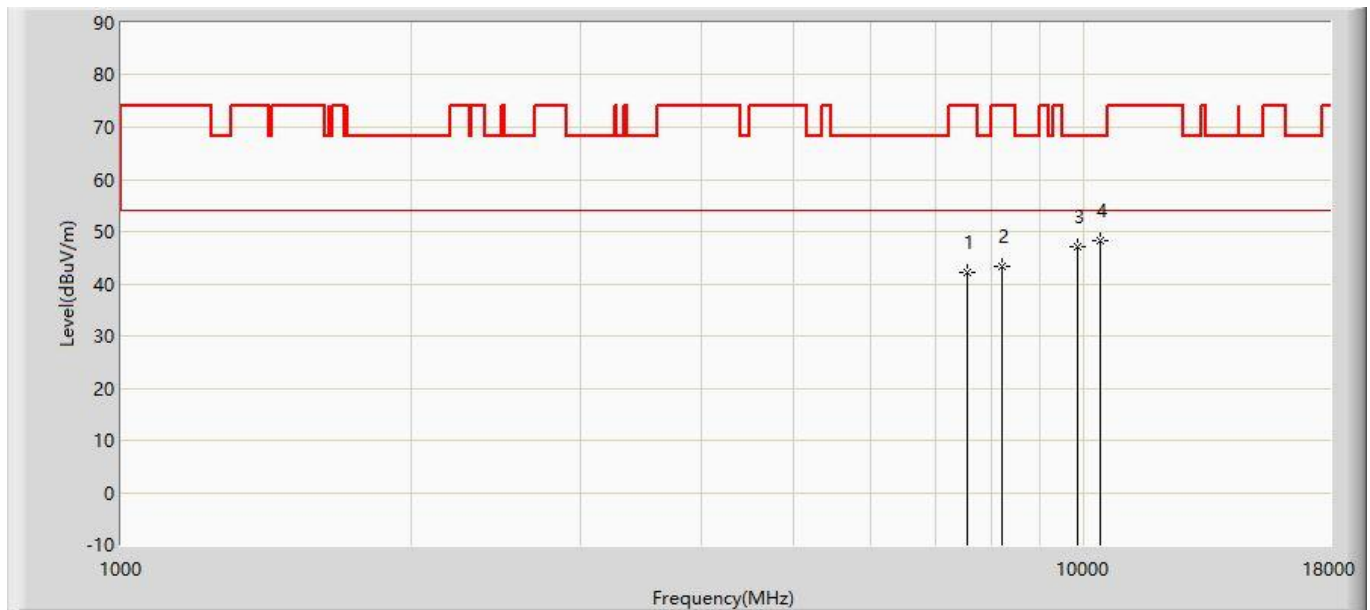


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7570.500	42.304	30.516	-31.696	74.000	11.789	PK
2			8208.000	43.295	30.971	-30.705	74.000	12.324	PK
3			9848.500	47.041	32.278	-21.159	68.200	14.763	PK
4		*	10392.500	48.360	31.837	-19.840	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5785MHz with OAW-AP1362 (CDD Mode)	

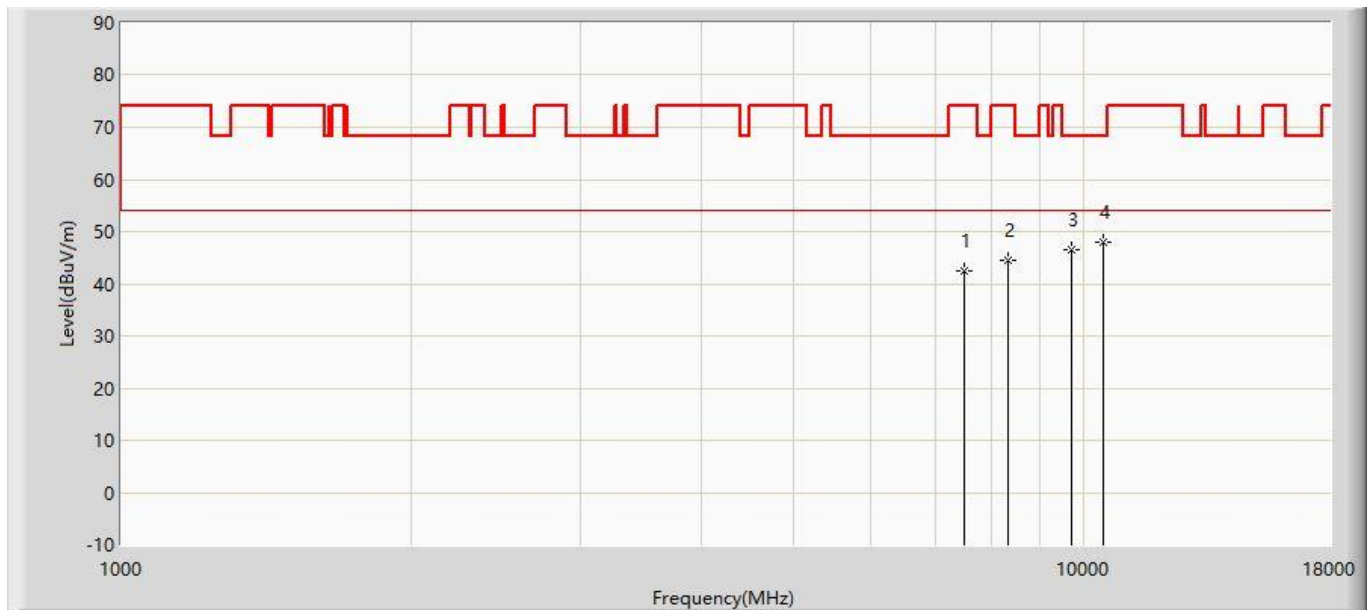


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	42.344	30.630	-31.656	74.000	11.714	PK
2			8344.000	44.539	32.155	-29.461	74.000	12.384	PK
3			9712.500	46.452	32.135	-21.748	68.200	14.316	PK
4		*	10486.000	48.111	31.286	-20.089	68.200	16.825	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5785MHz with OAW-AP1362 (CDD Mode)	

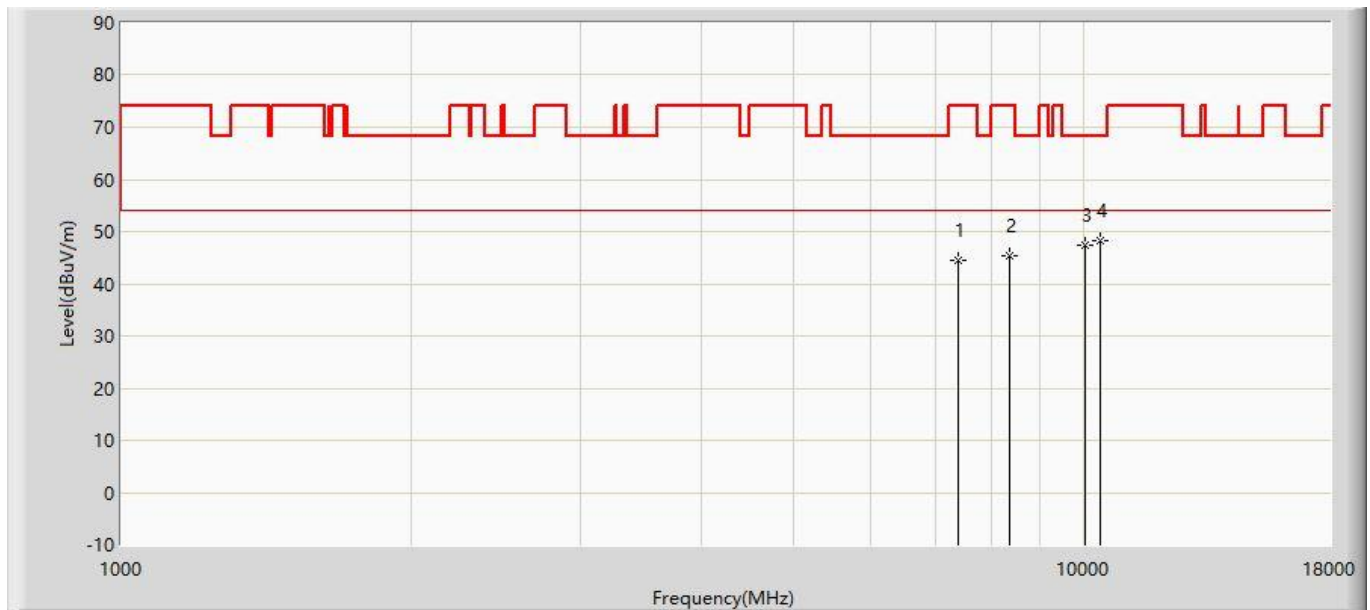


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	44.505	33.012	-29.495	74.000	11.493	PK
2			8378.000	45.370	32.969	-28.630	74.000	12.401	PK
3			10010.000	47.381	32.089	-20.819	68.200	15.292	PK
4		*	10409.500	48.394	31.815	-19.806	68.200	16.579	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz with OAW-AP1362 (CDD Mode)	

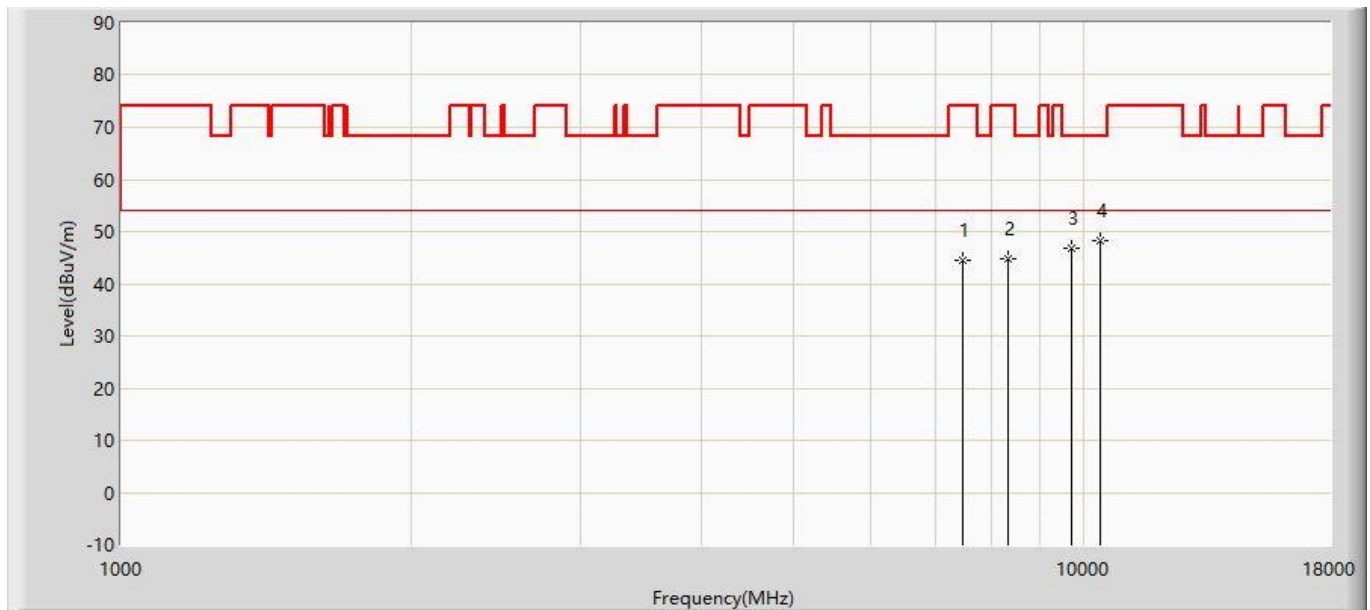

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	44.570	32.926	-29.430	74.000	11.644	PK
2			8335.500	44.646	32.265	-29.354	74.000	12.381	PK
3			9695.500	46.739	32.478	-21.461	68.200	14.261	PK
4		*	10392.500	48.280	31.757	-19.920	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7613.000	44.066	32.235	-29.934	74.000	11.831	PK
2			8318.500	45.087	32.714	-28.913	74.000	12.373	PK
3			9840.000	47.018	32.283	-21.182	68.200	14.735	PK
4		*	10401.000	47.947	31.396	-20.253	68.200	16.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz with OAW-AP1362 (CDD Mode)	

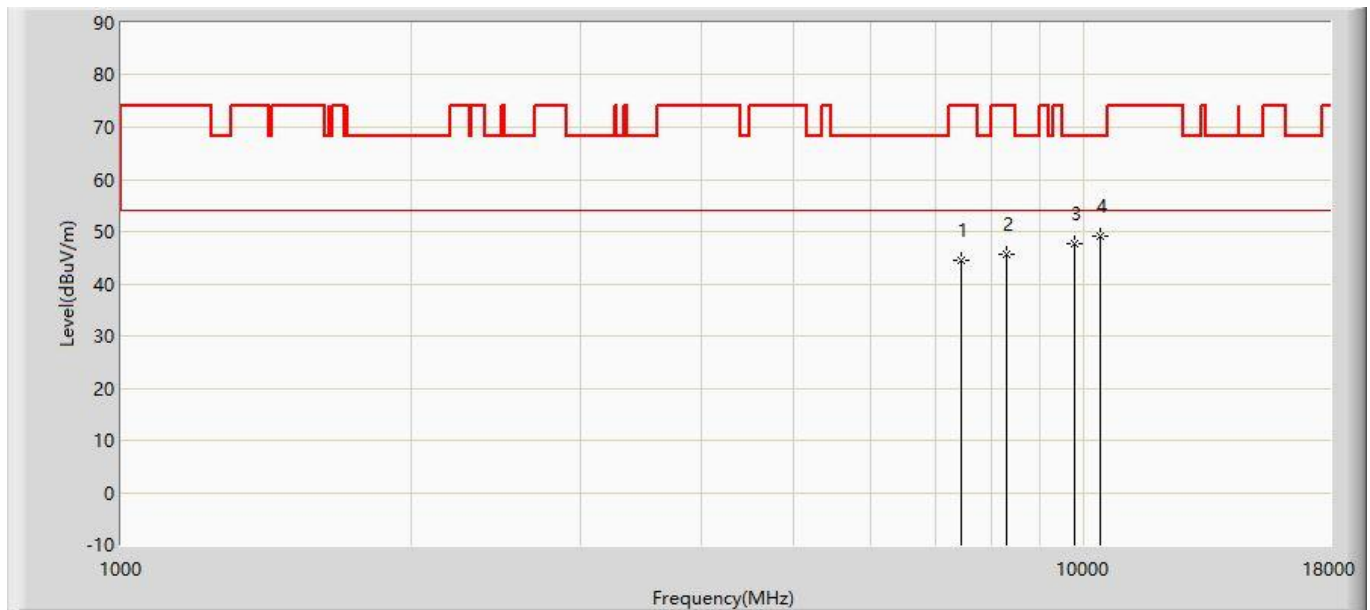


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7443.000	44.509	32.921	-29.491	74.000	11.588	PK
2			8301.500	45.584	33.218	-28.416	74.000	12.366	PK
3			9772.000	47.665	33.153	-20.535	68.200	14.512	PK
4		*	10384.000	49.134	32.638	-19.066	68.200	16.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz with OAW-AP1362 (CDD Mode)	

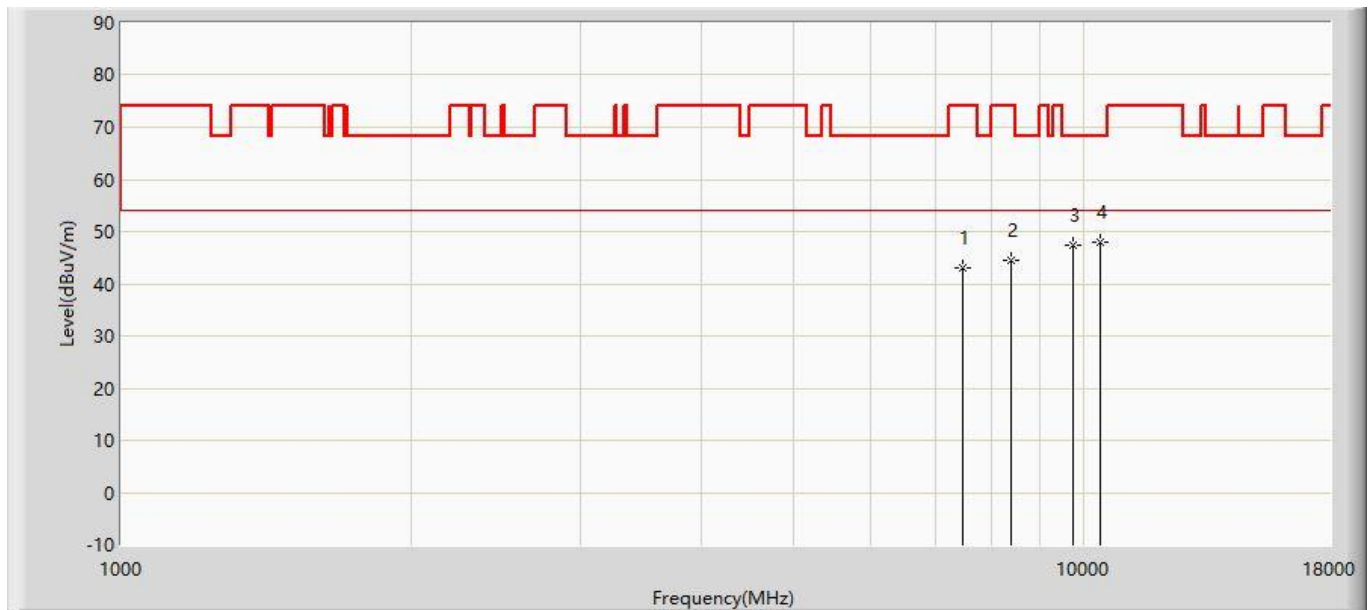


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	42.945	31.282	-31.055	74.000	11.663	PK
2			8395.000	44.379	31.971	-29.621	74.000	12.408	PK
3			9738.000	47.406	33.005	-20.794	68.200	14.401	PK
4		*	10384.000	47.950	31.454	-20.250	68.200	16.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5230MHz with OAW-AP1362 (CDD Mode)	

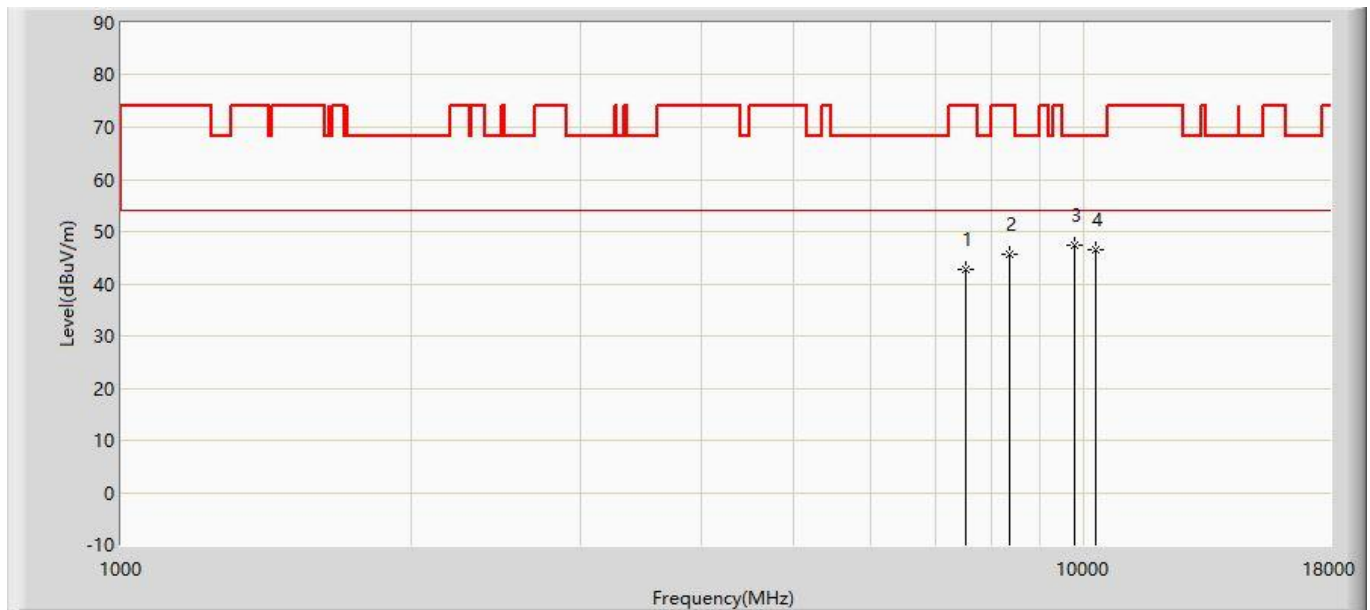


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	42.850	31.098	-31.150	74.000	11.752	PK
2			8378.000	45.543	33.142	-28.457	74.000	12.401	PK
3		*	9780.500	47.399	32.859	-20.801	68.200	14.540	PK
4			10290.500	46.484	30.289	-21.716	68.200	16.194	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5230MHz with OAW-AP1362 (CDD Mode)	

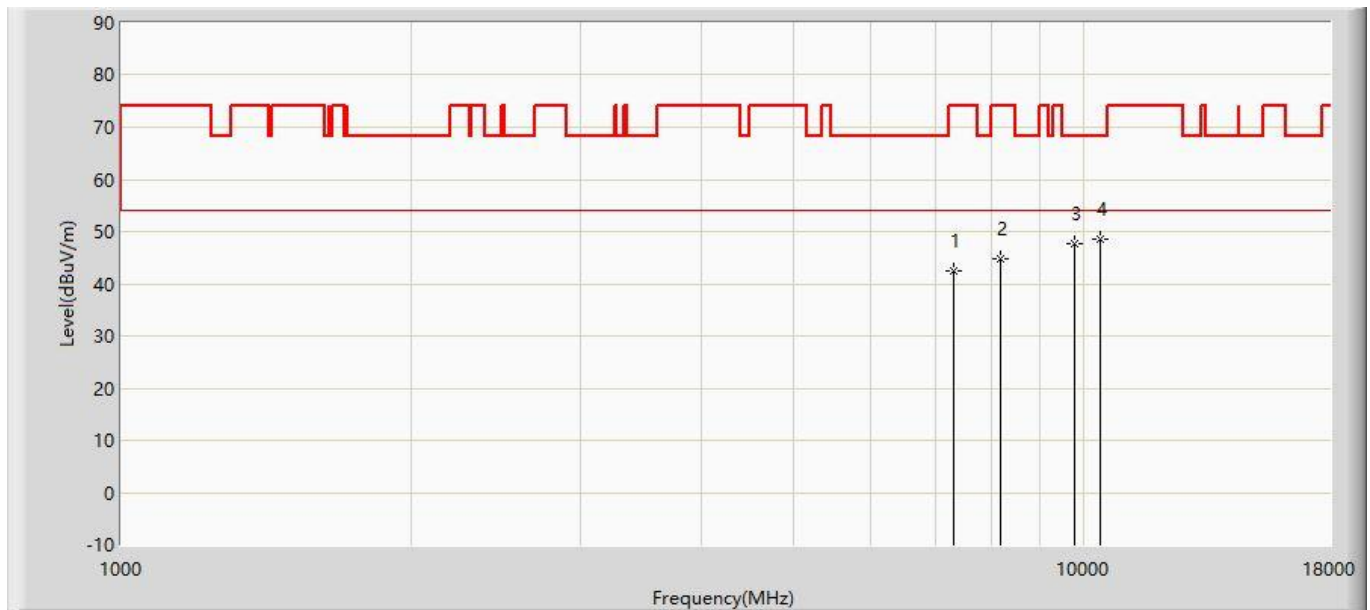


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7324.000	42.350	31.027	-31.650	74.000	11.323	PK
2			8191.000	44.754	32.438	-29.246	74.000	12.316	PK
3			9772.000	47.640	33.128	-20.560	68.200	14.512	PK
4		*	10384.000	48.436	31.940	-19.764	68.200	16.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5270MHz with OAW-AP1362 (CDD Mode)	

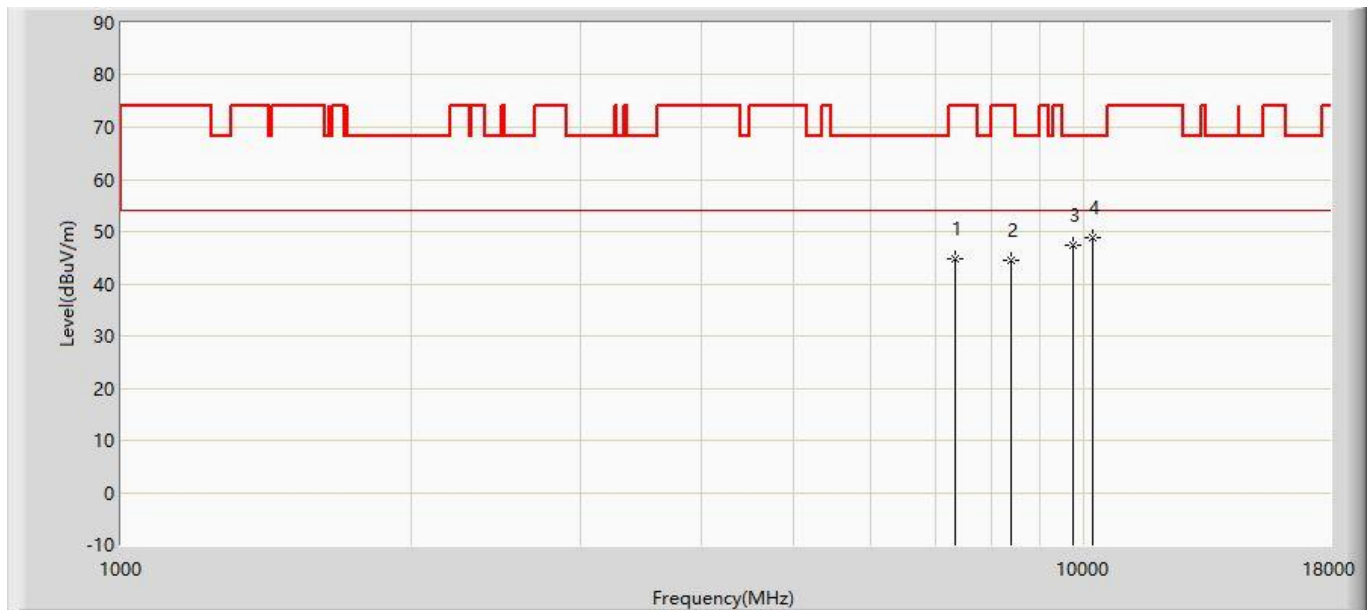


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7358.000	44.891	33.492	-29.109	74.000	11.399	PK
2			8386.500	44.586	32.182	-29.414	74.000	12.404	PK
3			9746.500	47.358	32.929	-20.842	68.200	14.428	PK
4		*	10214.000	48.776	32.827	-19.424	68.200	15.949	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5270MHz with OAW-AP1362 (CDD Mode)	

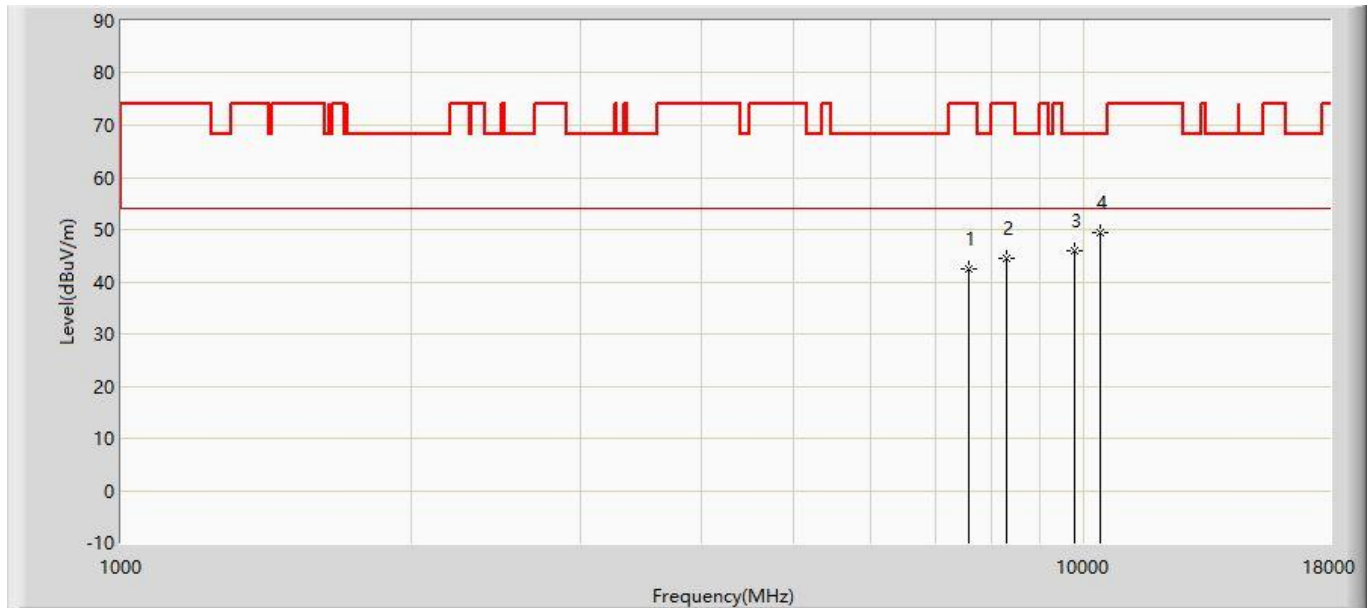


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7579.000	42.359	30.562	-31.641	74.000	11.797	PK
2			8318.500	44.587	32.214	-29.413	74.000	12.373	PK
3			9772.000	45.948	31.436	-22.252	68.200	14.512	PK
4		*	10392.500	49.380	32.857	-18.820	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz with OAW-AP1362 (CDD Mode)	

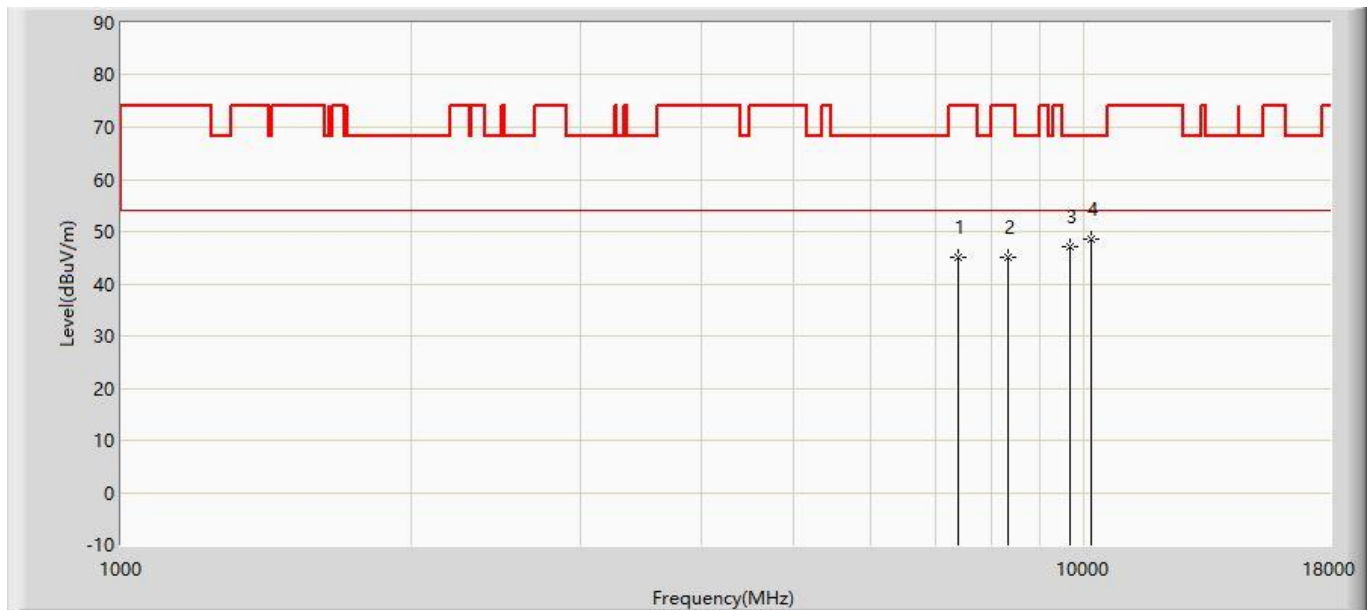


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7392.000	44.961	33.488	-29.039	74.000	11.473	PK
2			8335.500	45.088	32.707	-28.912	74.000	12.381	PK
3			9661.500	47.020	32.870	-21.180	68.200	14.151	PK
4		*	10188.500	48.517	32.650	-19.683	68.200	15.868	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz with OAW-AP1362 (CDD Mode)	

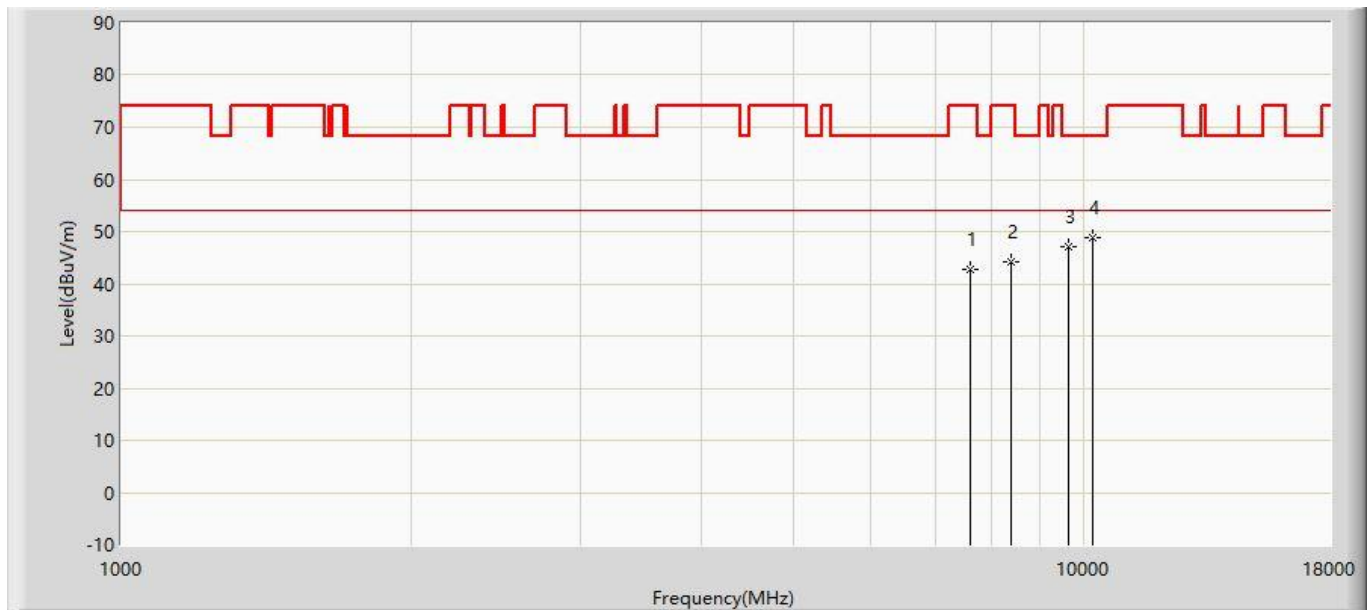


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	42.723	30.900	-31.277	74.000	11.822	PK
2			8386.500	44.206	31.802	-29.794	74.000	12.404	PK
3			9636.000	46.983	32.917	-21.217	68.200	14.066	PK
4		*	10214.000	48.739	32.790	-19.461	68.200	15.949	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz with OAW-AP1362 (CDD Mode)	

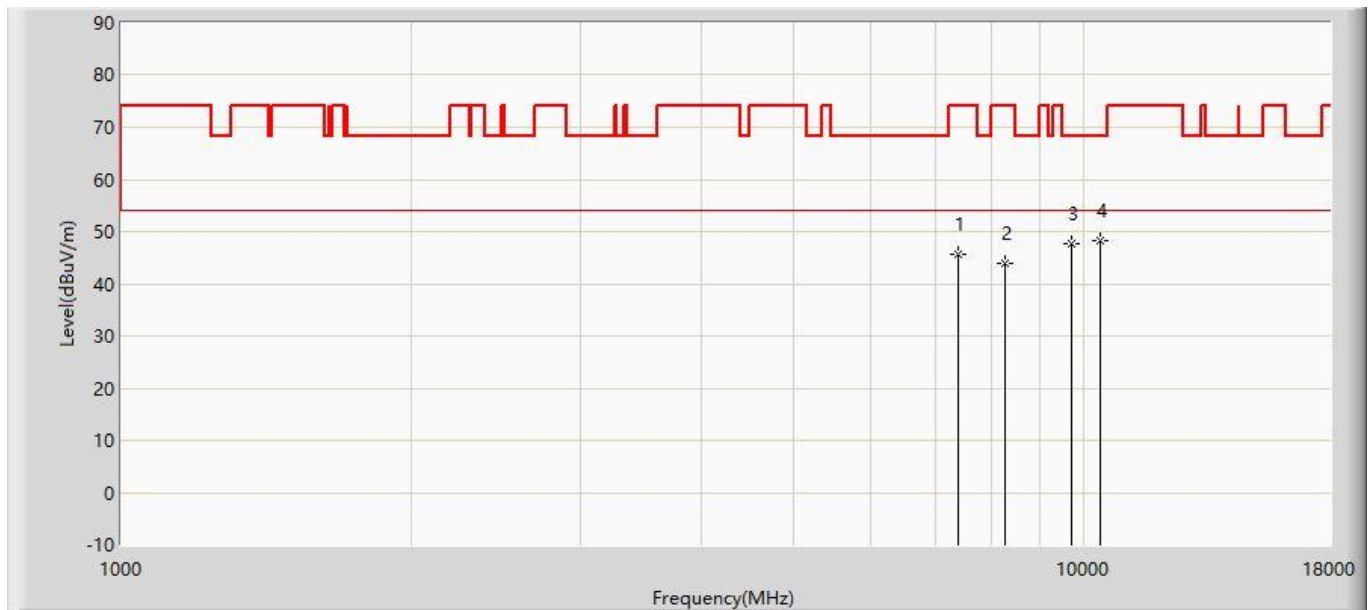


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	45.719	34.226	-28.281	74.000	11.493	PK
2			8267.500	44.048	31.698	-29.952	74.000	12.350	PK
3			9712.500	47.743	33.426	-20.457	68.200	14.316	PK
4		*	10401.000	48.404	31.853	-19.796	68.200	16.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz with OAW-AP1362 (CDD Mode)	

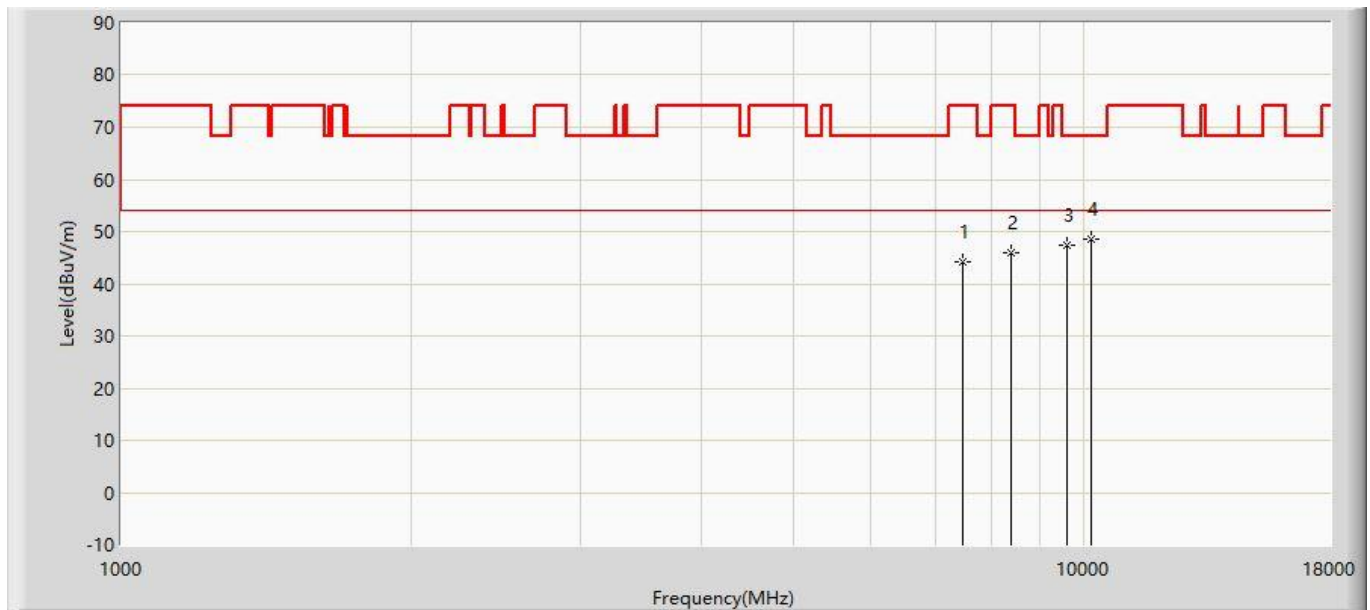


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	44.299	32.636	-29.701	74.000	11.663	PK
2			8386.500	45.924	33.520	-28.076	74.000	12.404	PK
3			9593.500	47.313	33.387	-20.887	68.200	13.926	PK
4		*	10180.000	48.675	32.835	-19.525	68.200	15.840	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5590MHz with OAW-AP1362 (CDD Mode)	

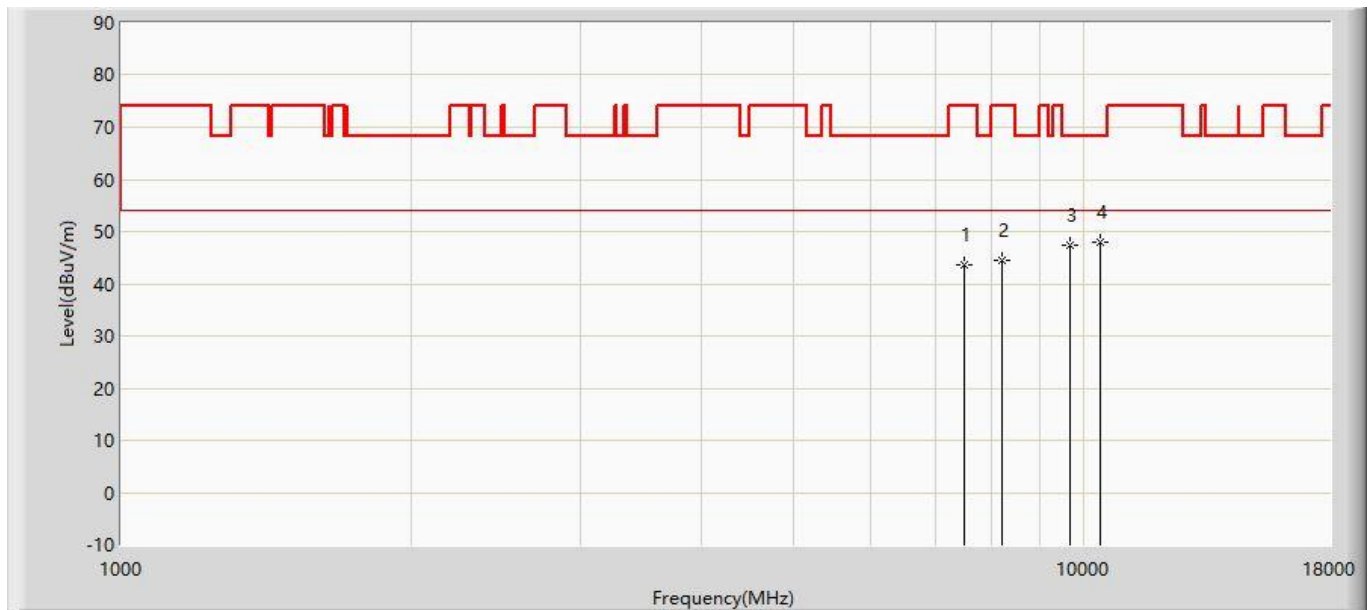


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7519.500	43.715	31.980	-30.285	74.000	11.734	PK
2			8225.000	44.557	32.225	-29.443	74.000	12.332	PK
3			9661.500	47.511	33.361	-20.689	68.200	14.151	PK
4		*	10409.500	47.996	31.417	-20.204	68.200	16.579	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5590MHz with OAW-AP1362 (CDD Mode)	

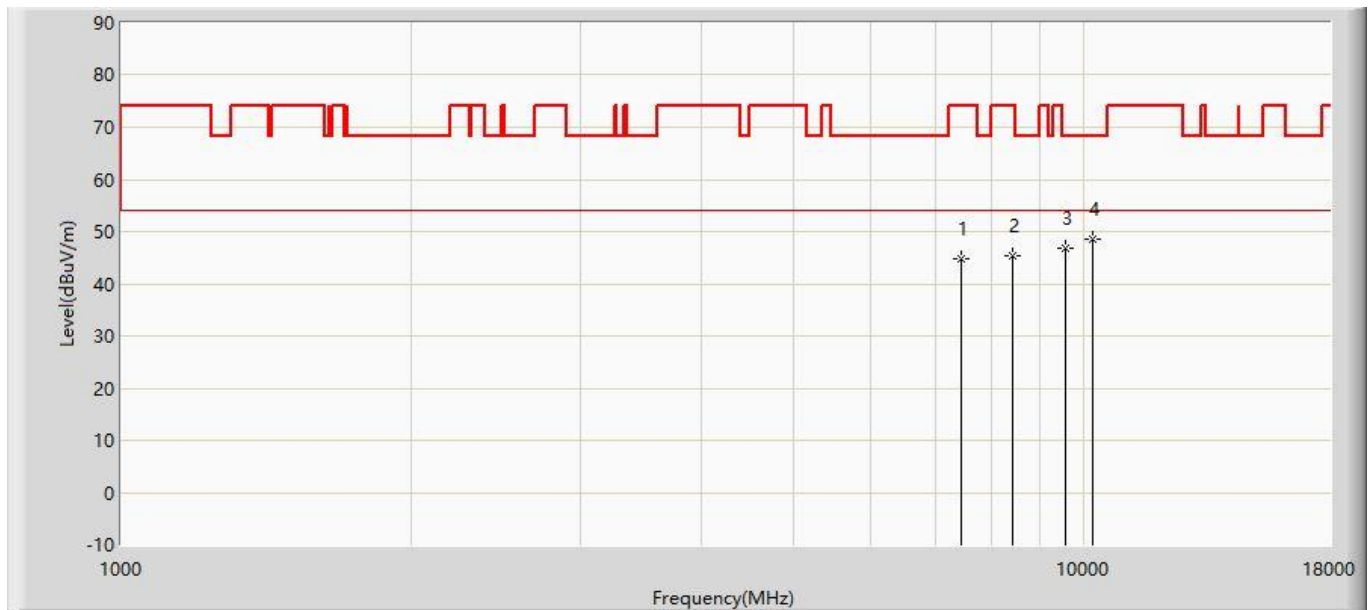


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7460.000	44.910	33.284	-29.090	74.000	11.626	PK
2			8420.500	45.221	32.802	-28.779	74.000	12.419	PK
3			9576.500	46.866	32.995	-21.334	68.200	13.871	PK
4		*	10214.000	48.636	32.687	-19.564	68.200	15.949	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz with OAW-AP1362 (CDD Mode)	

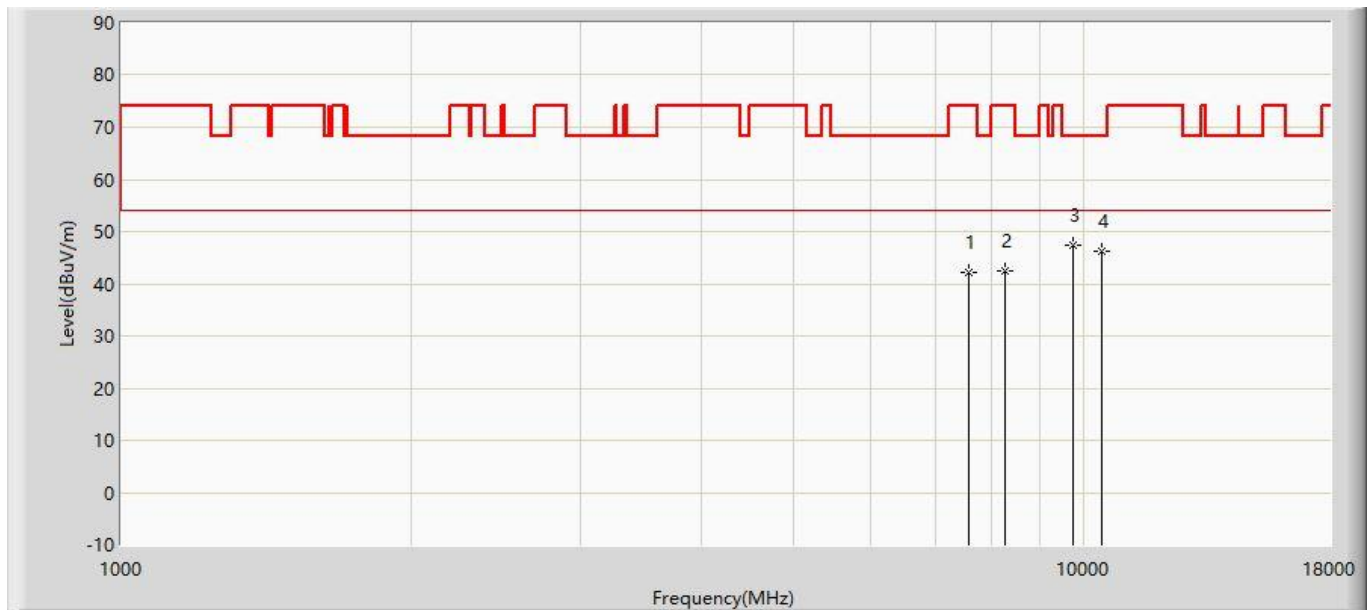


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7587.500	42.078	30.273	-31.922	74.000	11.806	PK
2			8276.000	42.553	30.199	-31.447	74.000	12.354	PK
3		*	9738.000	47.351	32.950	-20.849	68.200	14.401	PK
4			10443.500	46.369	29.681	-21.831	68.200	16.688	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz with OAW-AP1362 (CDD Mode)	

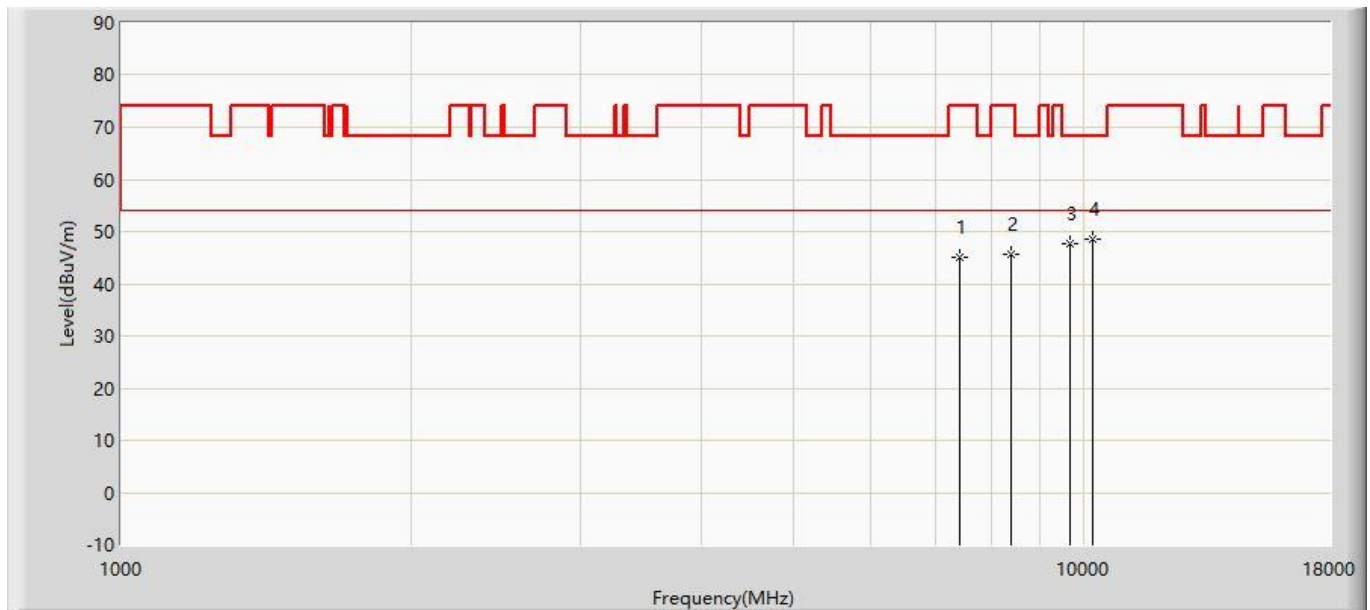


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	45.045	33.476	-28.955	74.000	11.569	PK
2			8395.000	45.781	33.373	-28.219	74.000	12.408	PK
3			9661.500	47.644	33.494	-20.556	68.200	14.151	PK
4		*	10214.000	48.655	32.706	-19.545	68.200	15.949	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5710MHz with OAW-AP1362 (CDD Mode)	

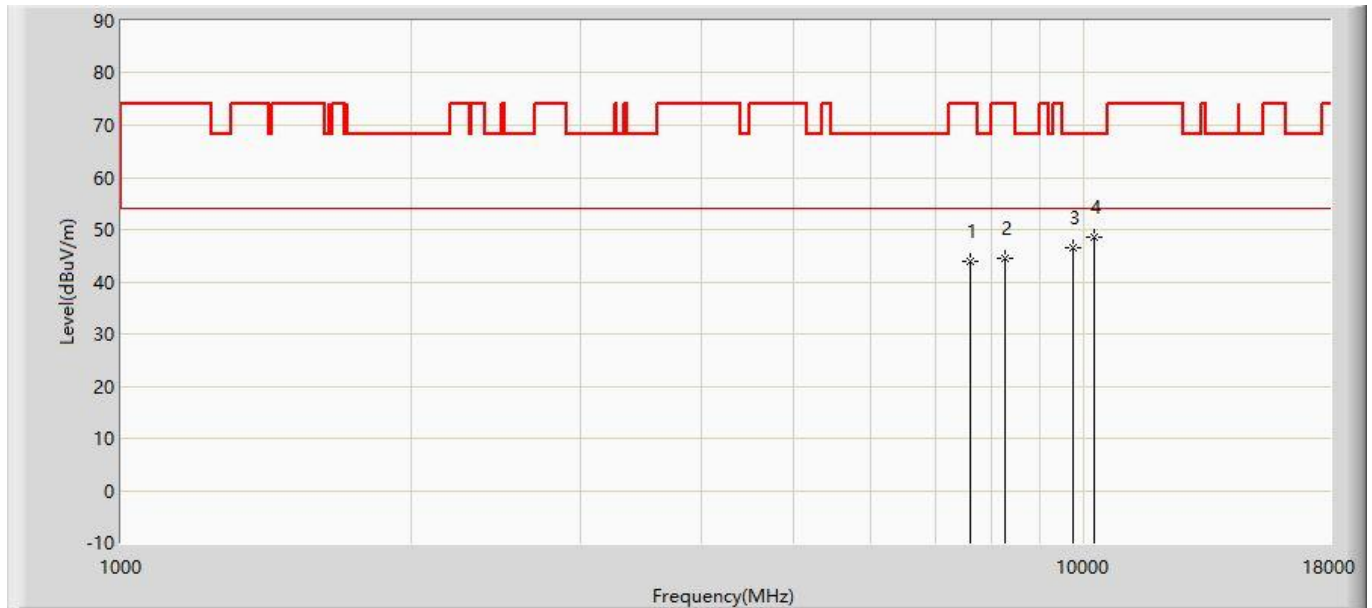


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7621.500	43.787	31.947	-30.213	74.000	11.840	PK
2			8267.500	44.465	32.115	-29.535	74.000	12.350	PK
3			9738.000	46.462	32.061	-21.738	68.200	14.401	PK
4		*	10248.000	48.465	32.406	-19.735	68.200	16.059	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5710MHz with OAW-AP1362 (CDD Mode)	

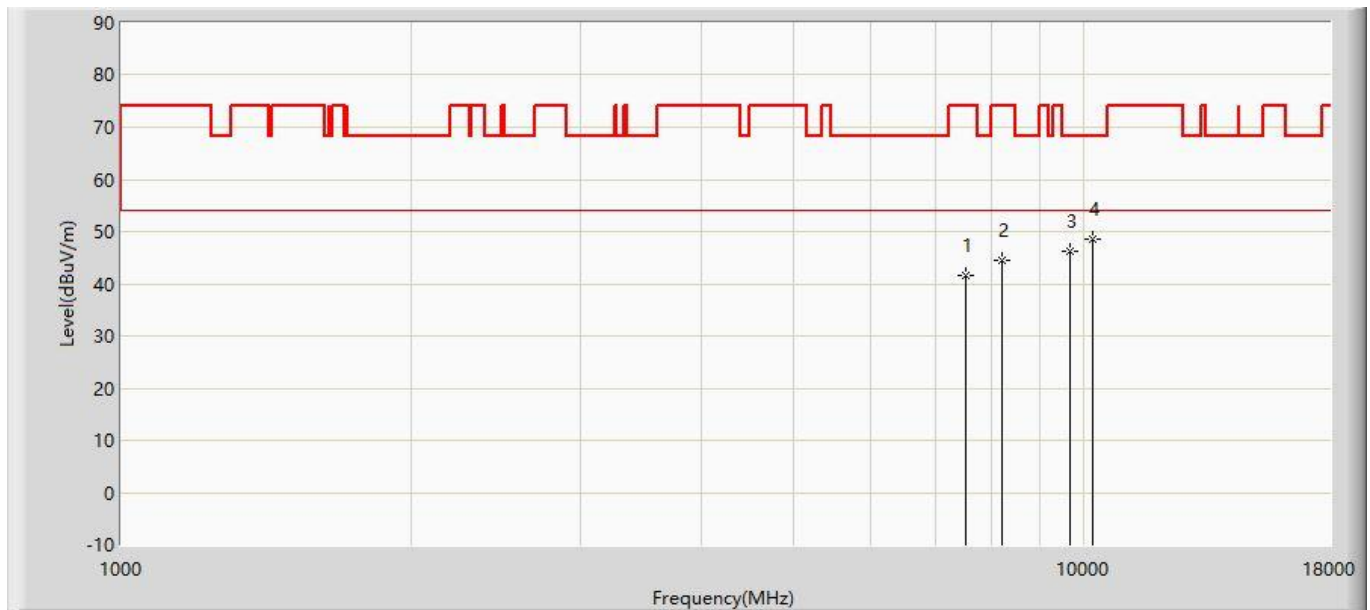

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7528.000	41.462	29.719	-32.538	74.000	11.743	PK
2			8225.000	44.358	32.026	-29.642	74.000	12.332	PK
3			9678.500	46.268	32.063	-21.932	68.200	14.205	PK
4		*	10214.000	48.665	32.716	-19.535	68.200	15.949	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7621.500	43.284	31.444	-30.716	74.000	11.840	PK
2			8344.000	44.607	32.223	-29.393	74.000	12.384	PK
3			9593.500	46.574	32.648	-21.626	68.200	13.926	PK
4		*	10205.500	48.277	32.355	-19.923	68.200	15.922	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz with OAW-AP1362 (CDD Mode)	

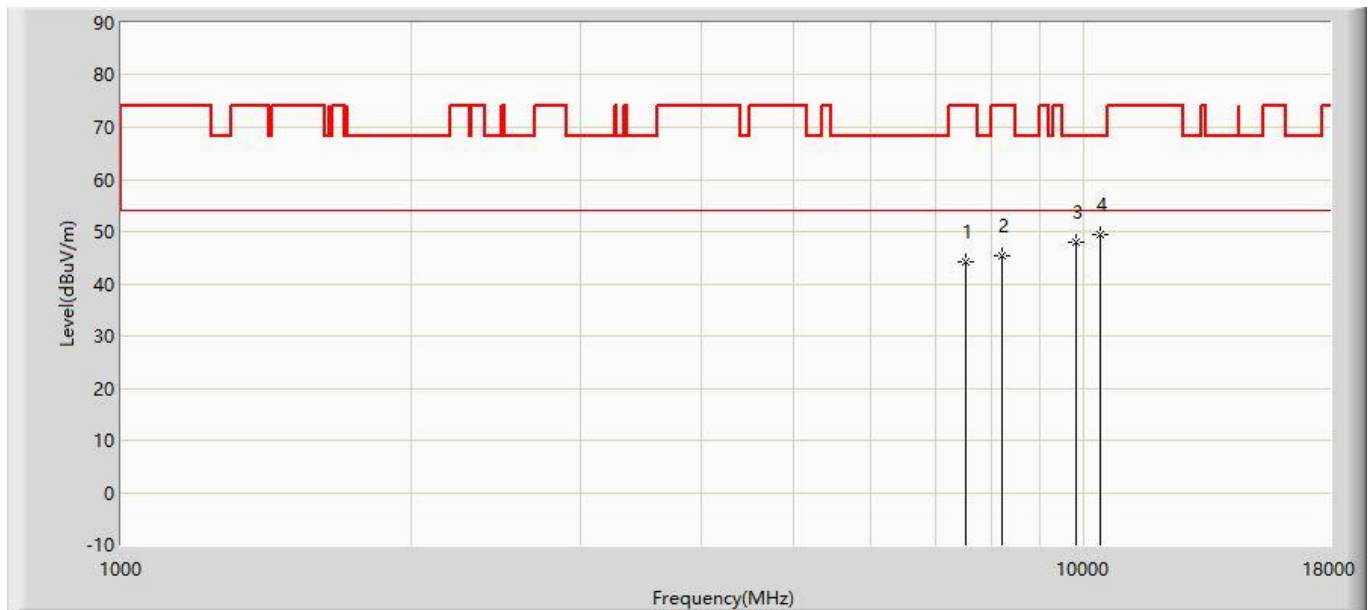


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	44.180	32.428	-29.820	74.000	11.752	PK
2			8216.500	45.311	32.983	-28.689	74.000	12.328	PK
3			9814.500	47.936	33.284	-20.264	68.200	14.652	PK
4		*	10384.000	49.276	32.780	-18.924	68.200	16.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz with OAW-AP1362 (CDD Mode)	

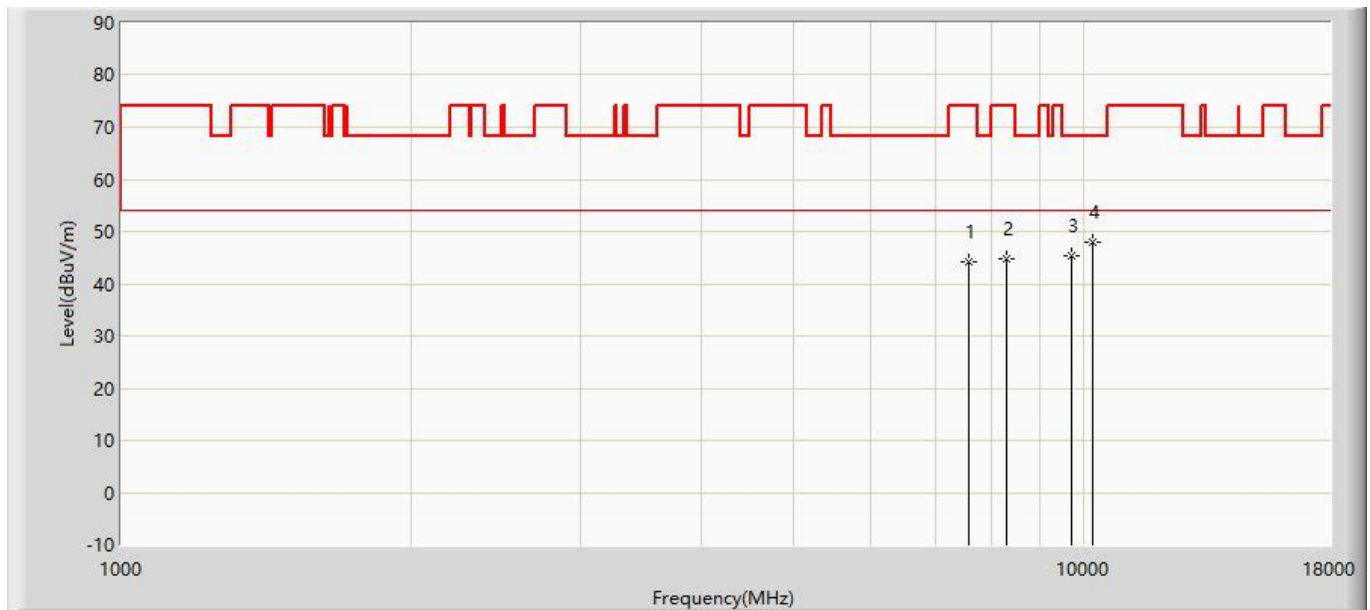


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7596.000	44.092	32.278	-29.908	74.000	11.814	PK
2			8310.000	44.796	32.427	-29.204	74.000	12.369	PK
3			9721.000	45.303	30.958	-22.897	68.200	14.345	PK
4		*	10214.000	48.049	32.100	-20.151	68.200	15.949	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz with OAW-AP1362 (CDD Mode)	

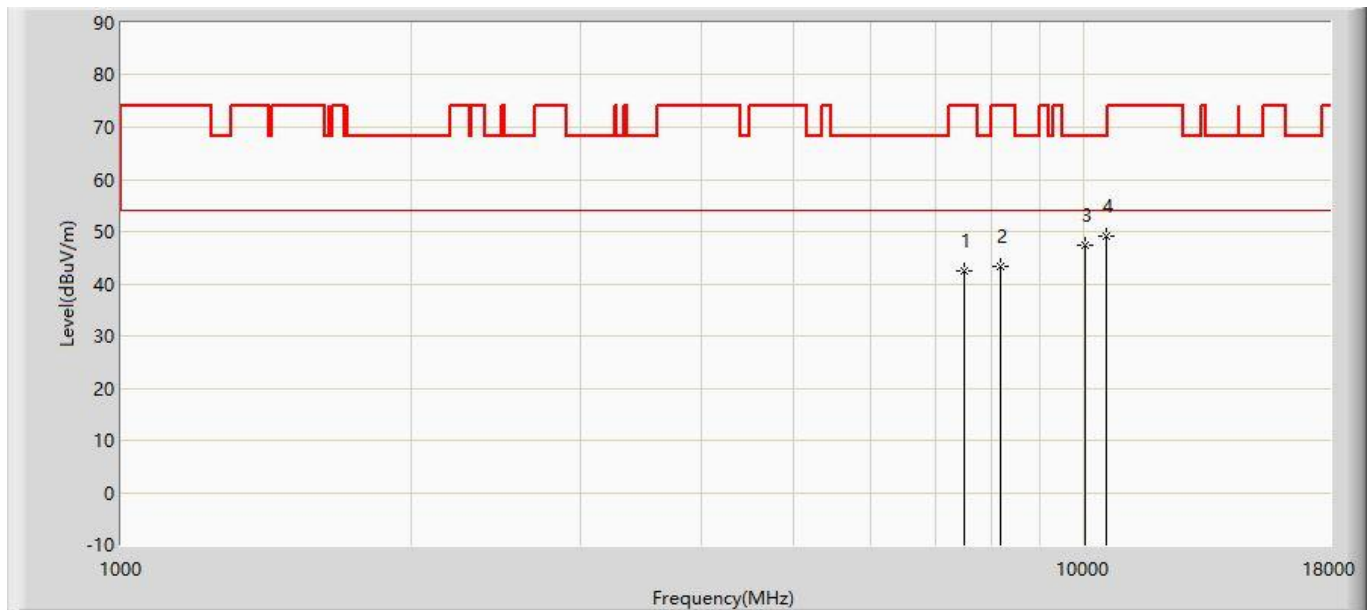


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	42.571	30.857	-31.429	74.000	11.714	PK
2			8199.500	43.458	31.138	-30.542	74.000	12.320	PK
3			10035.500	47.468	32.094	-20.732	68.200	15.374	PK
4		*	10562.500	49.096	32.137	-19.104	68.200	16.959	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz with OAW-AP1362 (CDD Mode)	

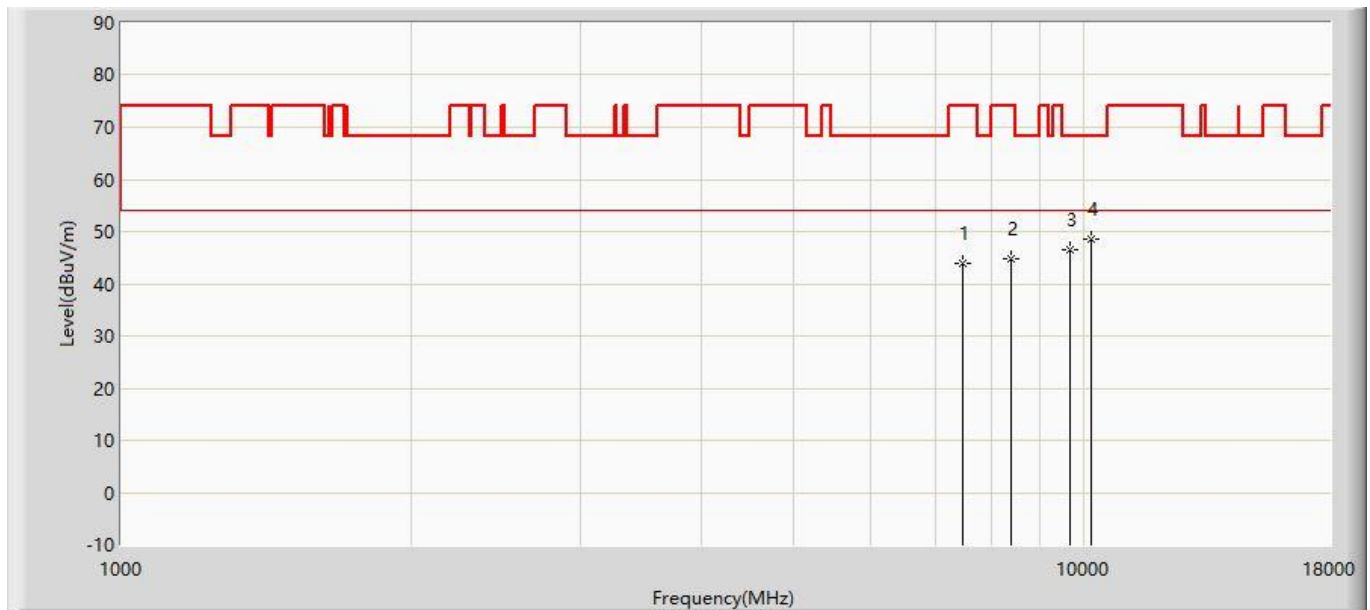

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	43.789	32.126	-30.211	74.000	11.663	PK
2			8386.500	44.857	32.453	-29.143	74.000	12.404	PK
3			9661.500	46.501	32.351	-21.699	68.200	14.151	PK
4		*	10180.000	48.420	32.580	-19.780	68.200	15.840	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7613.000	43.209	31.378	-30.791	74.000	11.831	PK
2			8208.000	44.652	32.328	-29.348	74.000	12.324	PK
3			9780.500	46.532	31.992	-21.668	68.200	14.540	PK
4		*	10205.500	48.470	32.548	-19.730	68.200	15.922	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5220MHz with OAW-AP1362 (CDD Mode)	

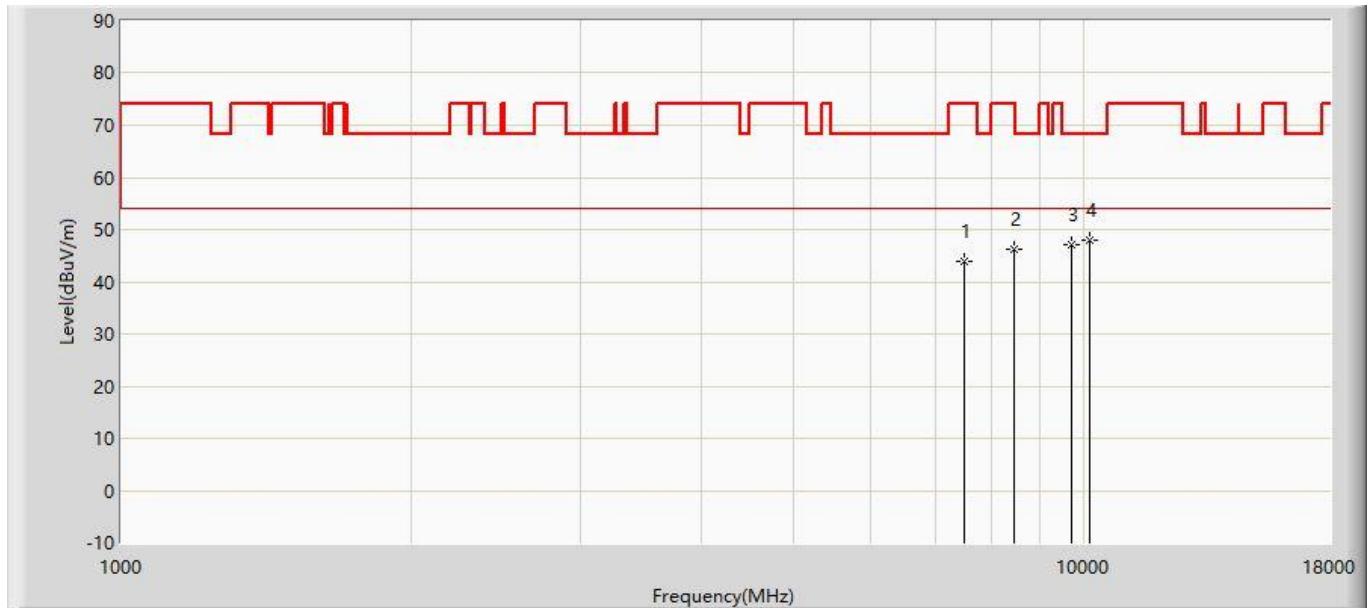


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7519.500	44.010	32.275	-29.990	74.000	11.734	PK
2			8463.000	46.155	33.717	-27.845	74.000	12.438	PK
3			9712.500	47.089	32.772	-21.111	68.200	14.316	PK
4		*	10146.000	47.934	32.204	-20.266	68.200	15.730	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5220MHz with OAW-AP1362 (CDD Mode)	

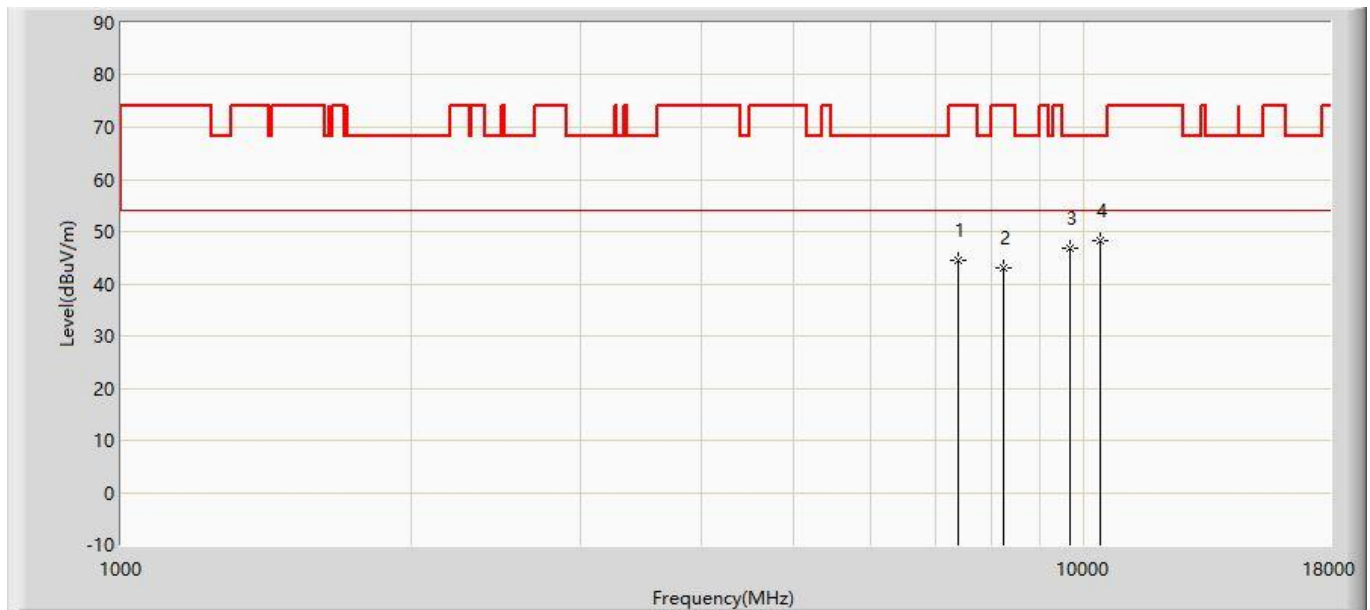

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7409.000	44.454	32.942	-29.546	74.000	11.512	PK
2			8242.000	42.920	30.581	-31.080	74.000	12.339	PK
3			9678.500	46.831	32.626	-21.369	68.200	14.205	PK
4		*	10375.500	48.299	31.830	-19.901	68.200	16.470	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5240MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	43.179	31.356	-30.821	74.000	11.822	PK
2			8352.500	44.608	32.220	-29.392	74.000	12.388	PK
3			9814.500	45.844	31.192	-22.356	68.200	14.652	PK
4		*	10367.000	47.309	30.868	-20.891	68.200	16.441	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5240MHz with OAW-AP1362 (CDD Mode)	

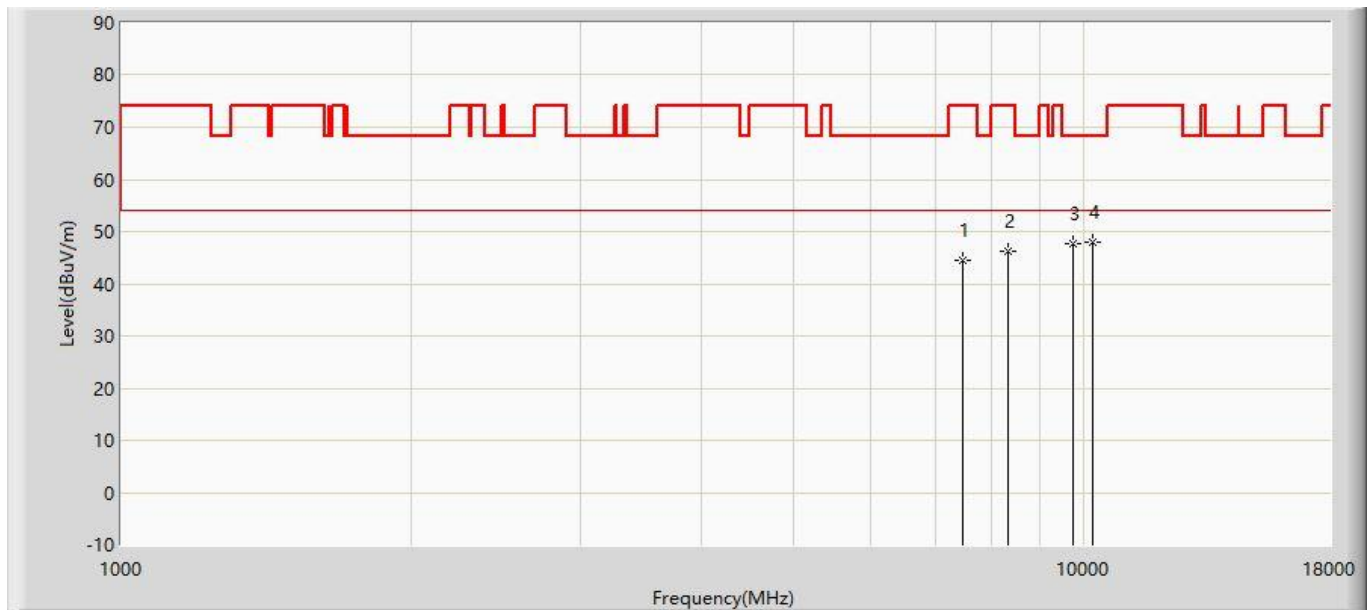


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7485.500	44.429	32.747	-29.571	74.000	11.683	PK
2			8344.000	46.312	33.928	-27.688	74.000	12.384	PK
3			9729.500	47.605	33.232	-20.595	68.200	14.373	PK
4		*	10214.000	47.980	32.031	-20.220	68.200	15.949	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5260MHz with OAW-AP1362 (CDD Mode)	

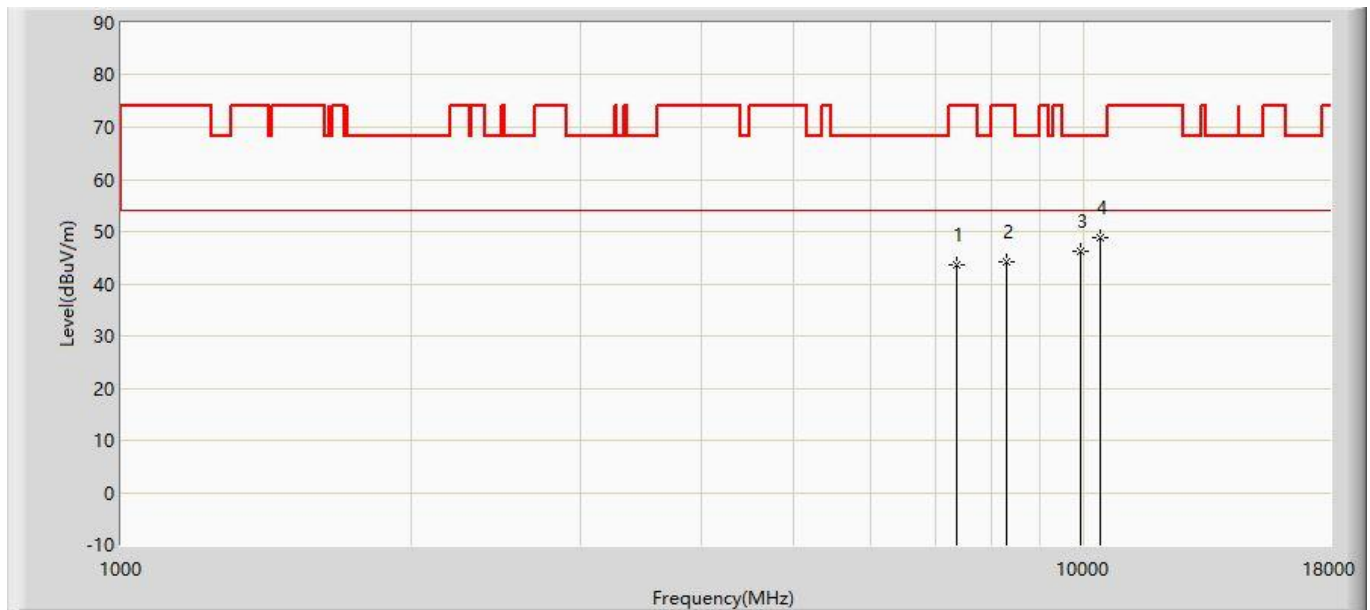

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7366.500	43.724	32.307	-30.276	74.000	11.418	PK
2			8301.500	44.210	31.844	-29.790	74.000	12.366	PK
3			9925.000	46.340	31.326	-21.860	68.200	15.014	PK
4		*	10401.000	48.859	32.308	-19.341	68.200	16.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5260MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7638.500	44.141	32.283	-29.859	74.000	11.859	PK
2			8276.000	43.734	31.380	-30.266	74.000	12.354	PK
3			9704.000	47.023	32.734	-21.177	68.200	14.289	PK
4		*	10401.000	48.859	32.308	-19.341	68.200	16.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5300MHz with OAW-AP1362 (CDD Mode)	

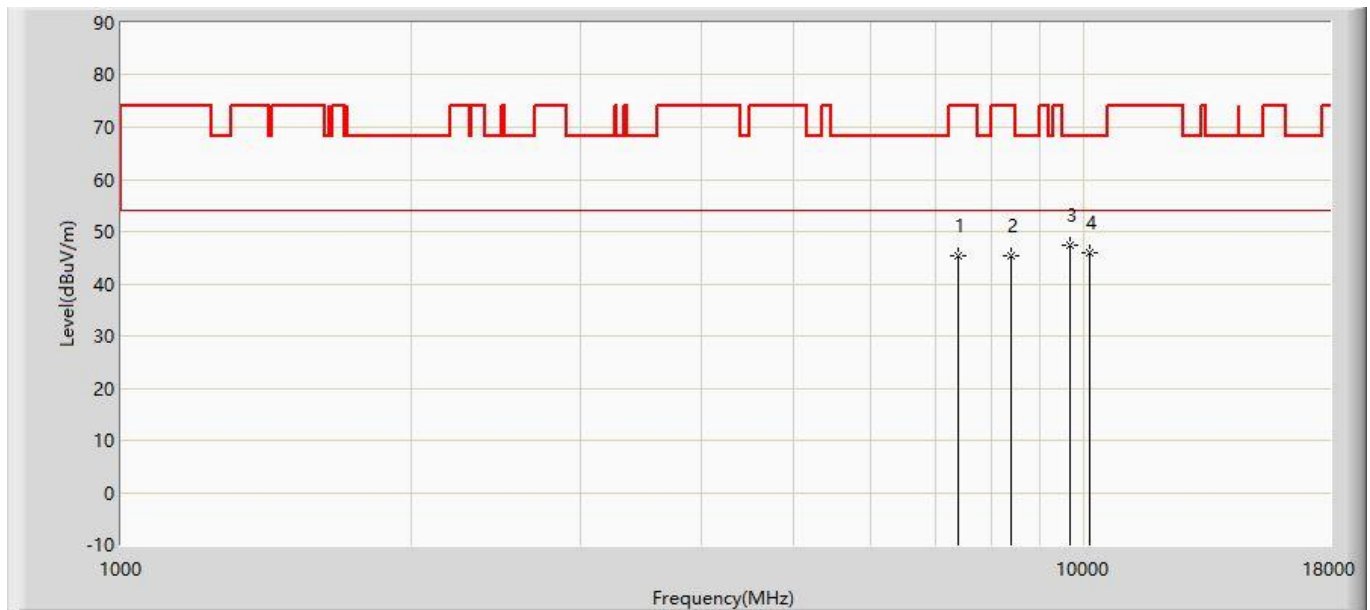


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	45.261	33.768	-28.739	74.000	11.493	PK
2			8386.500	45.432	33.028	-28.568	74.000	12.404	PK
3		*	9653.000	47.375	33.253	-20.825	68.200	14.122	PK
4			10120.500	45.972	30.324	-22.228	68.200	15.648	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5300MHz with OAW-AP1362 (CDD Mode)	

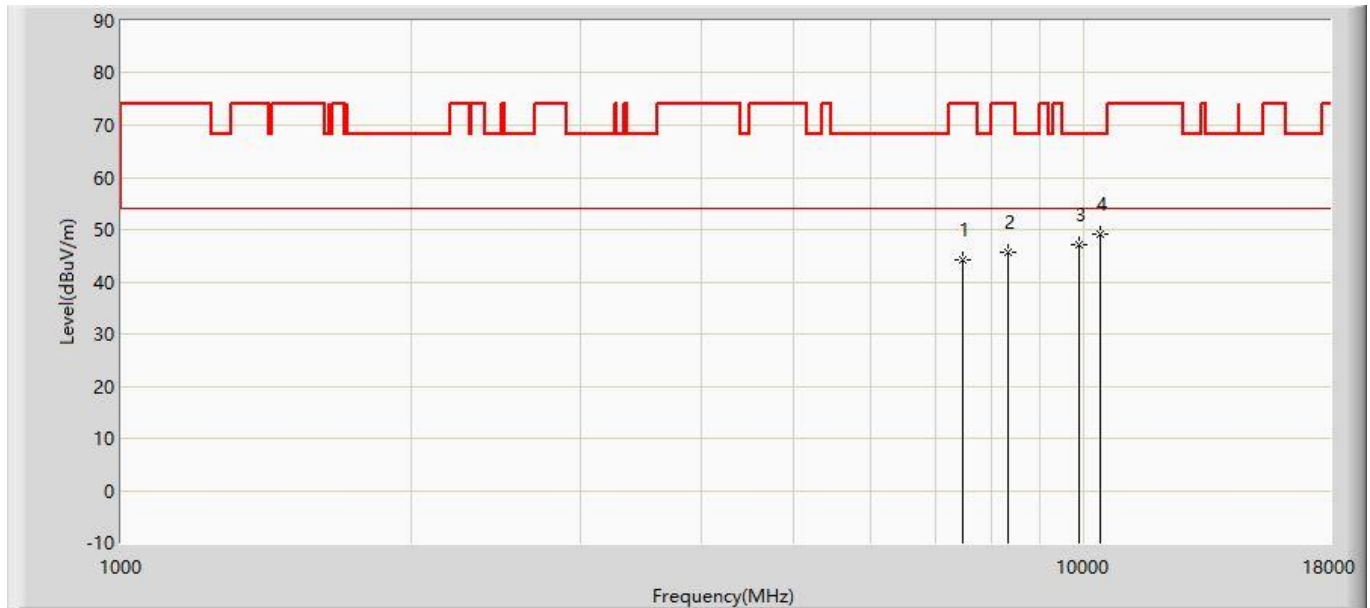


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7494.000	44.113	32.411	-29.887	74.000	11.702	PK
2			8344.000	45.599	33.215	-28.401	74.000	12.384	PK
3			9865.500	46.960	32.141	-21.240	68.200	14.819	PK
4		*	10401.000	49.227	32.676	-18.973	68.200	16.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz with OAW-AP1362 (CDD Mode)	

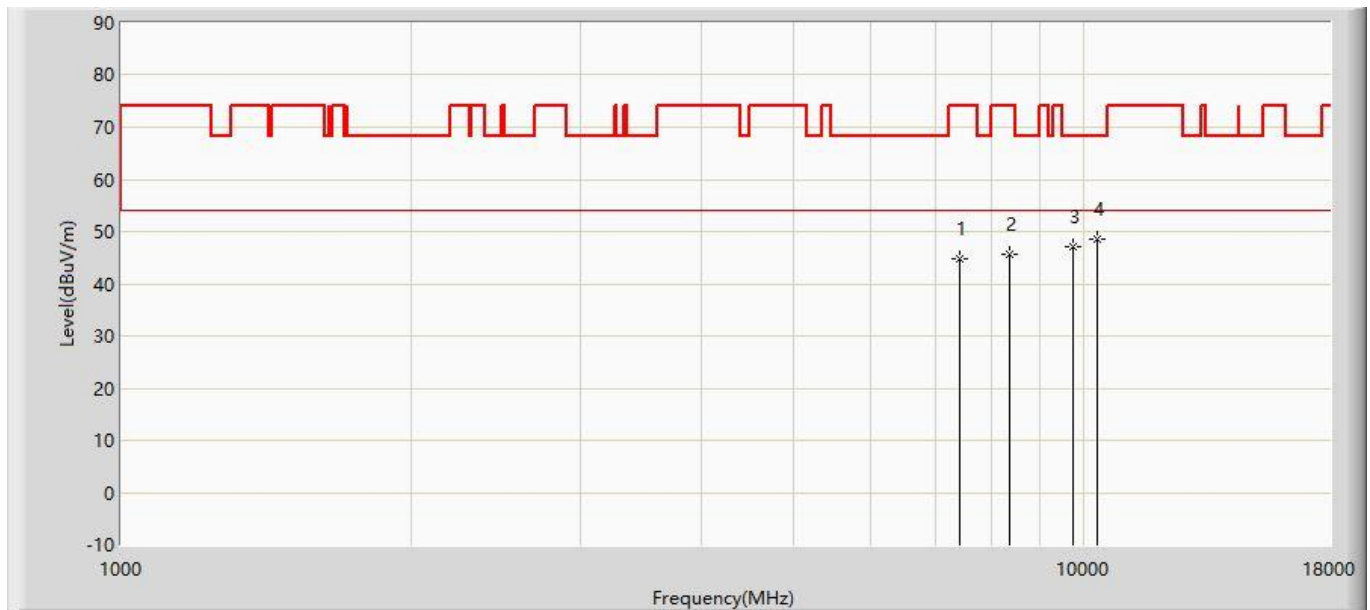


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	44.702	33.133	-29.298	74.000	11.569	PK
2			8378.000	45.695	33.294	-28.305	74.000	12.401	PK
3			9755.000	47.034	32.578	-21.166	68.200	14.456	PK
4		*	10333.000	48.574	32.241	-19.626	68.200	16.333	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz with OAW-AP1362 (CDD Mode)	

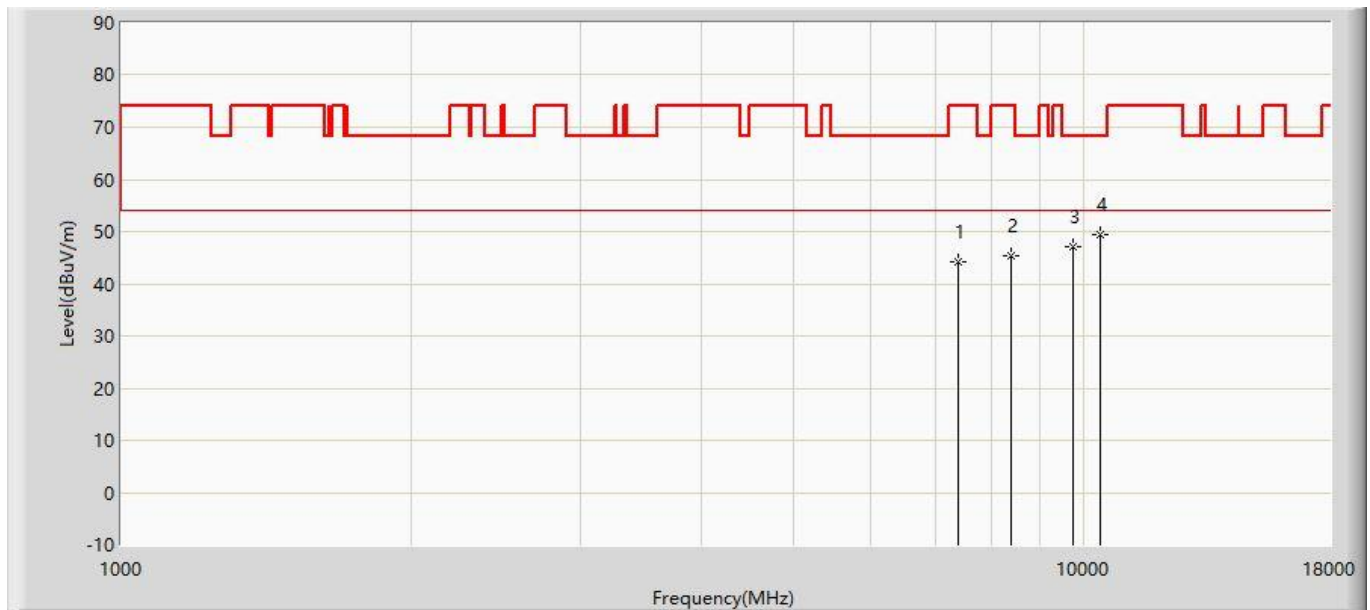


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	44.293	32.800	-29.707	74.000	11.493	PK
2			8386.500	45.299	32.895	-28.701	74.000	12.404	PK
3			9746.500	47.113	32.684	-21.087	68.200	14.428	PK
4		*	10392.500	49.417	32.894	-18.783	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz with OAW-AP1362 (CDD Mode)	

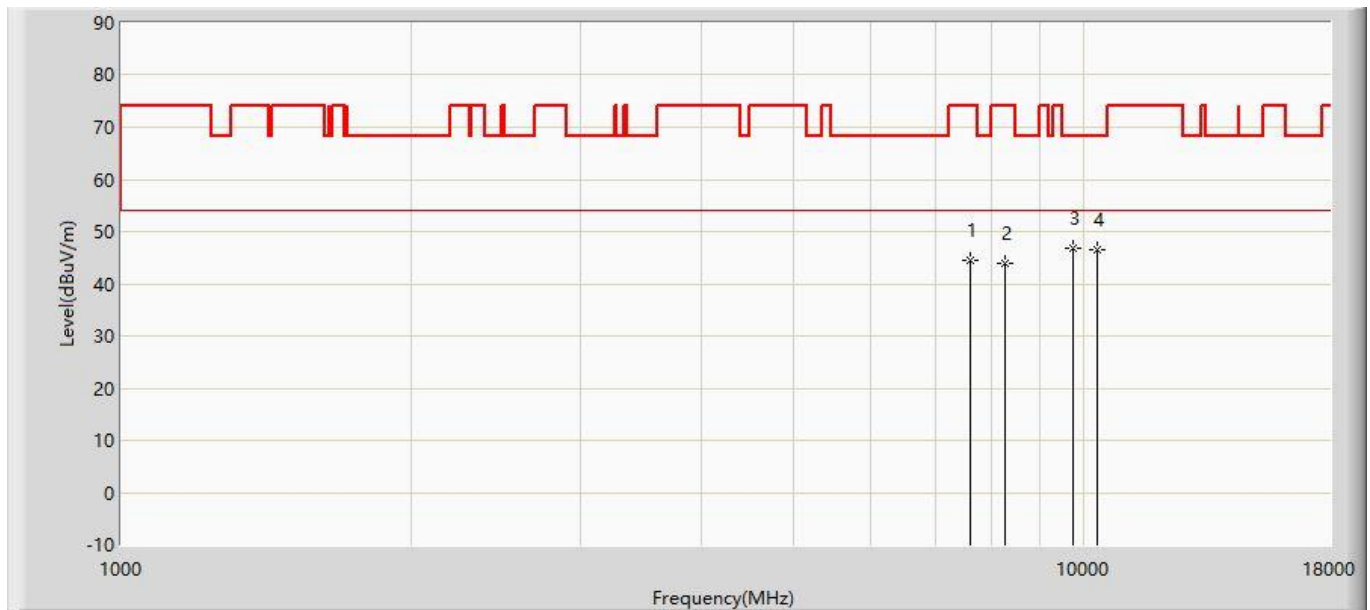

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7613.000	44.510	32.679	-29.490	74.000	11.831	PK
2			8276.000	43.777	31.423	-30.223	74.000	12.354	PK
3		*	9746.500	46.955	32.526	-21.245	68.200	14.428	PK
4			10307.500	46.417	30.166	-21.783	68.200	16.251	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7689.500	43.540	31.631	-30.460	74.000	11.910	PK
2			8301.500	45.247	32.881	-28.753	74.000	12.366	PK
3			9695.500	48.046	33.785	-20.154	68.200	14.261	PK
4		*	10401.000	49.539	32.988	-18.661	68.200	16.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5600MHz with OAW-AP1362 (CDD Mode)	

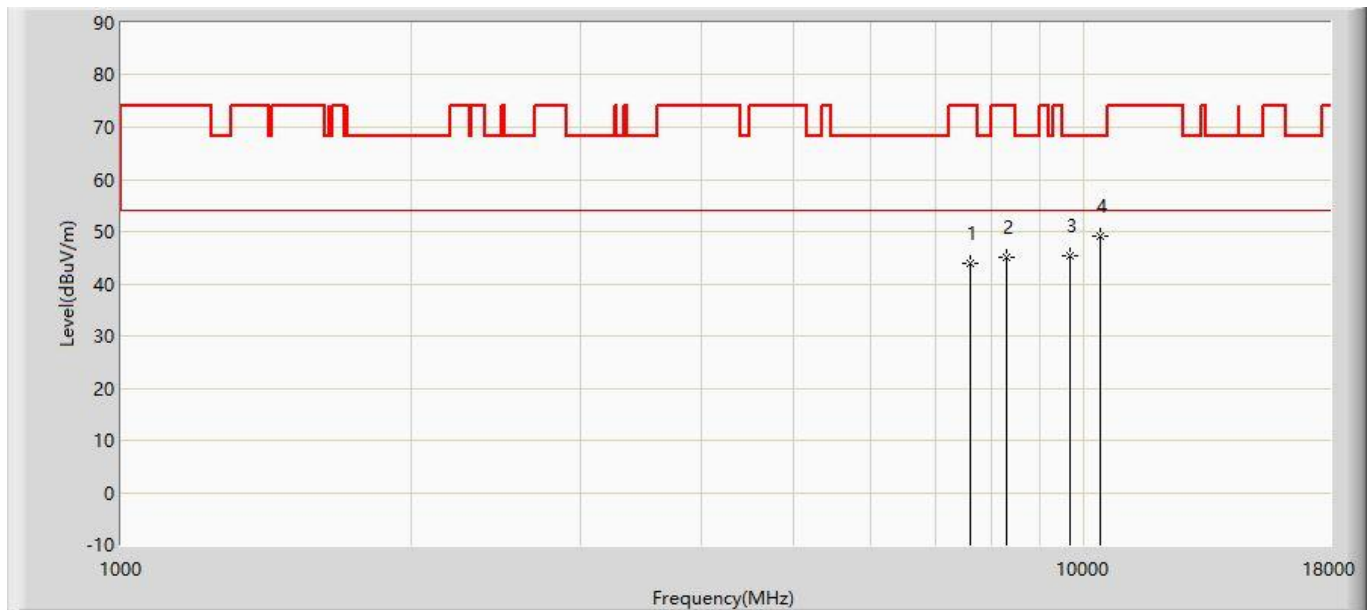


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	43.909	32.086	-30.091	74.000	11.822	PK
2			8310.000	44.955	32.586	-29.045	74.000	12.369	PK
3			9678.500	45.246	31.041	-22.954	68.200	14.205	PK
4		*	10384.000	49.126	32.630	-19.074	68.200	16.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5600MHz with OAW-AP1362 (CDD Mode)	

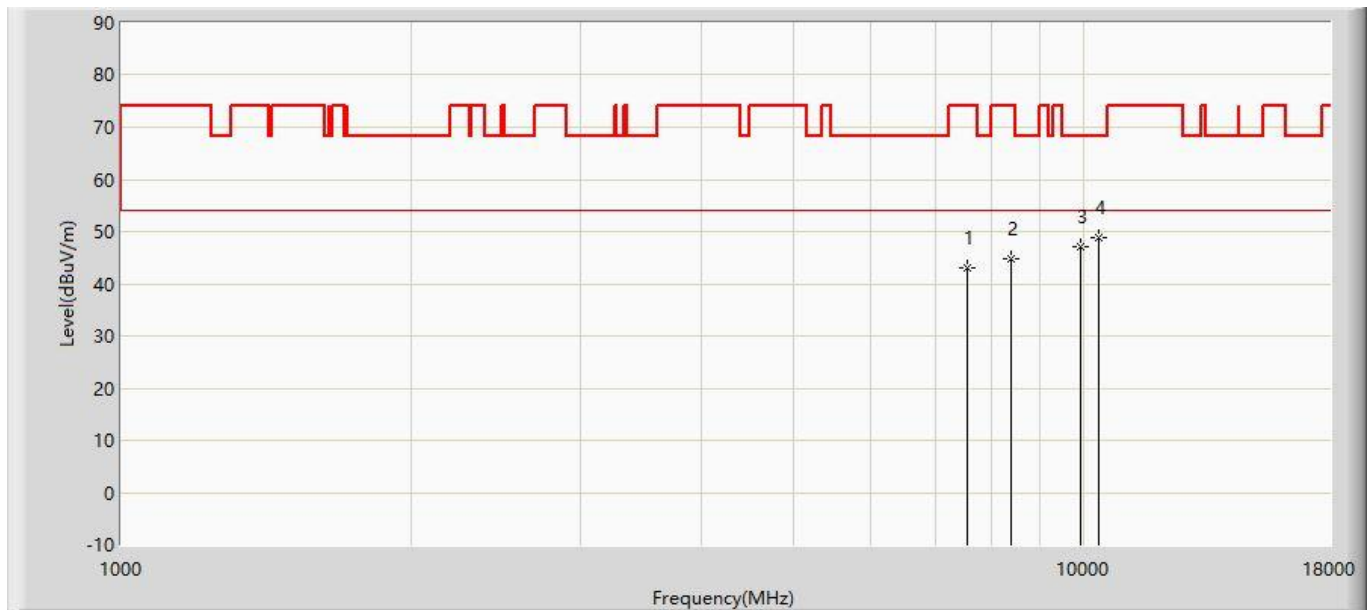


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7570.500	43.120	31.332	-30.880	74.000	11.789	PK
2			8412.000	44.864	32.448	-29.136	74.000	12.416	PK
3			9899.500	47.025	32.094	-21.175	68.200	14.931	PK
4		*	10367.000	48.731	32.290	-19.469	68.200	16.441	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz with OAW-AP1362 (CDD Mode)	

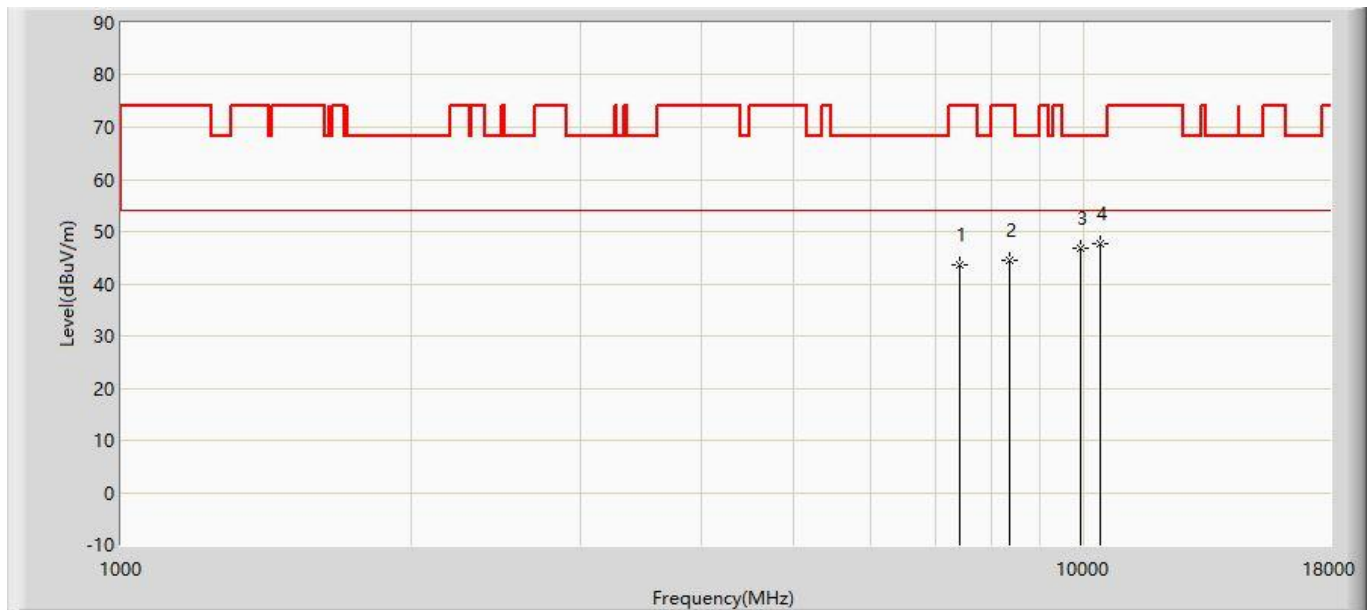


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	43.666	32.097	-30.334	74.000	11.569	PK
2			8378.000	44.584	32.183	-29.416	74.000	12.401	PK
3			9899.500	46.753	31.822	-21.447	68.200	14.931	PK
4		*	10392.500	47.795	31.272	-20.405	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz with OAW-AP1362 (CDD Mode)	

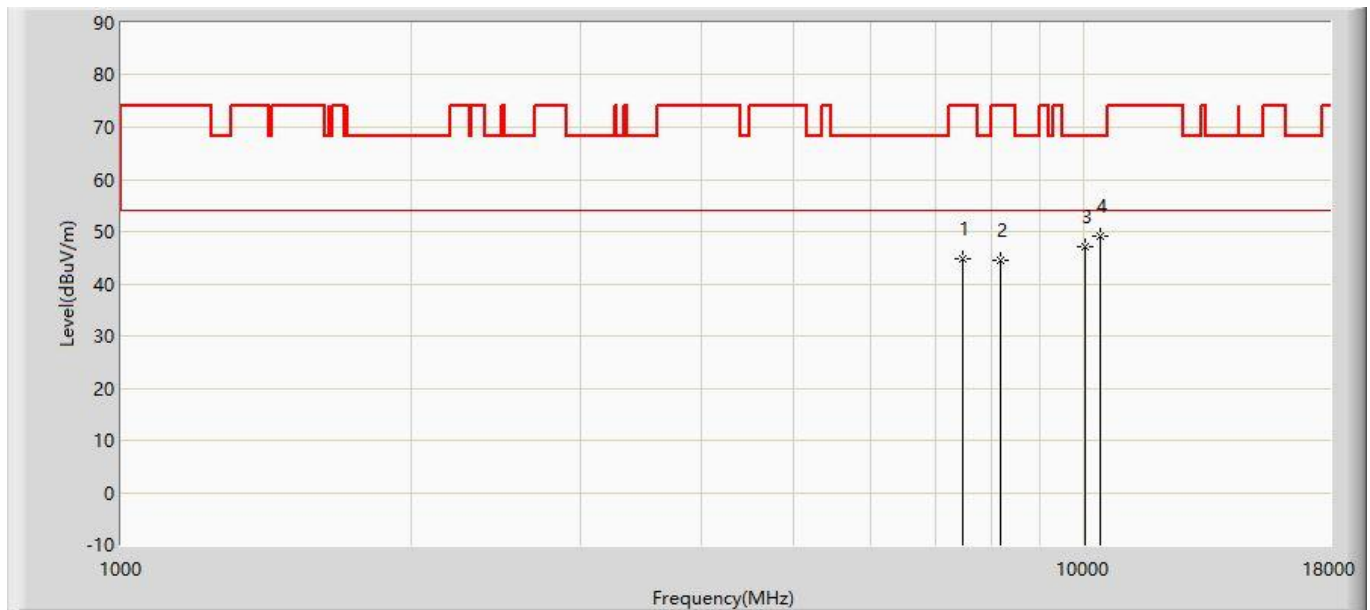


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7485.500	44.887	33.205	-29.113	74.000	11.683	PK
2			8182.500	44.385	32.073	-29.615	74.000	12.312	PK
3			10027.000	47.161	31.814	-21.039	68.200	15.347	PK
4		*	10392.500	49.001	32.478	-19.199	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5720MHz with OAW-AP1362 (CDD Mode)	

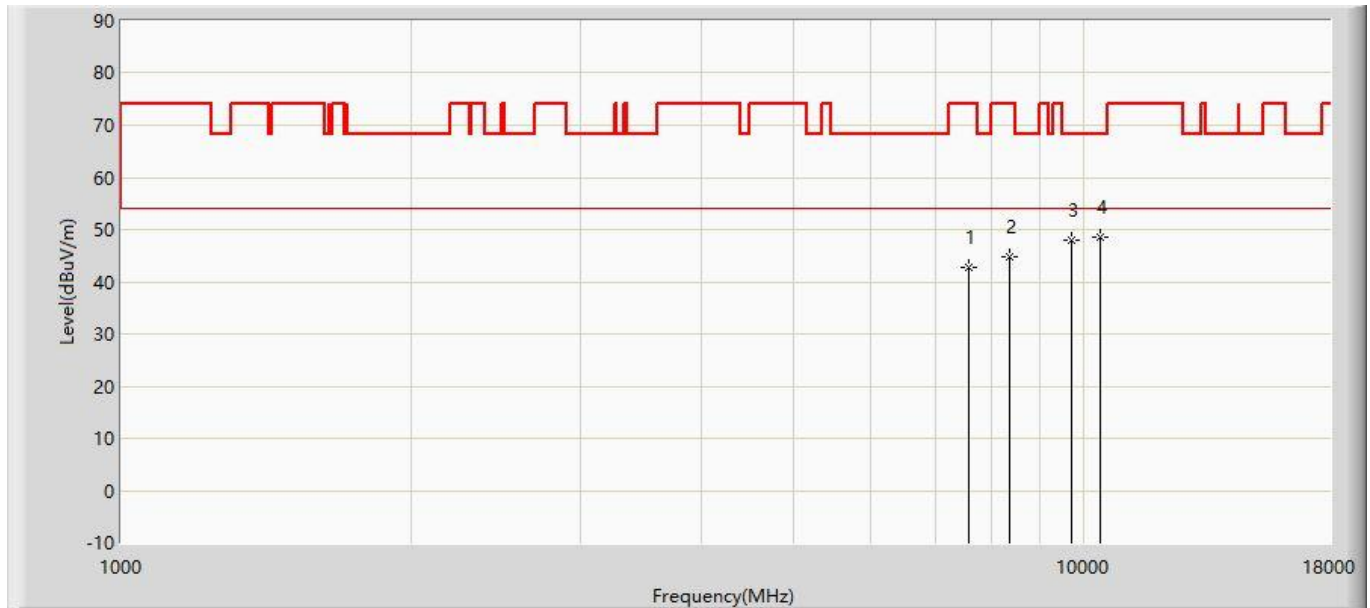


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7579.000	42.627	30.830	-31.373	74.000	11.797	PK
2			8369.500	44.894	32.497	-29.106	74.000	12.397	PK
3			9695.500	48.086	33.825	-20.114	68.200	14.261	PK
4		*	10384.000	48.598	32.102	-19.602	68.200	16.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5720MHz with OAW-AP1362 (CDD Mode)	

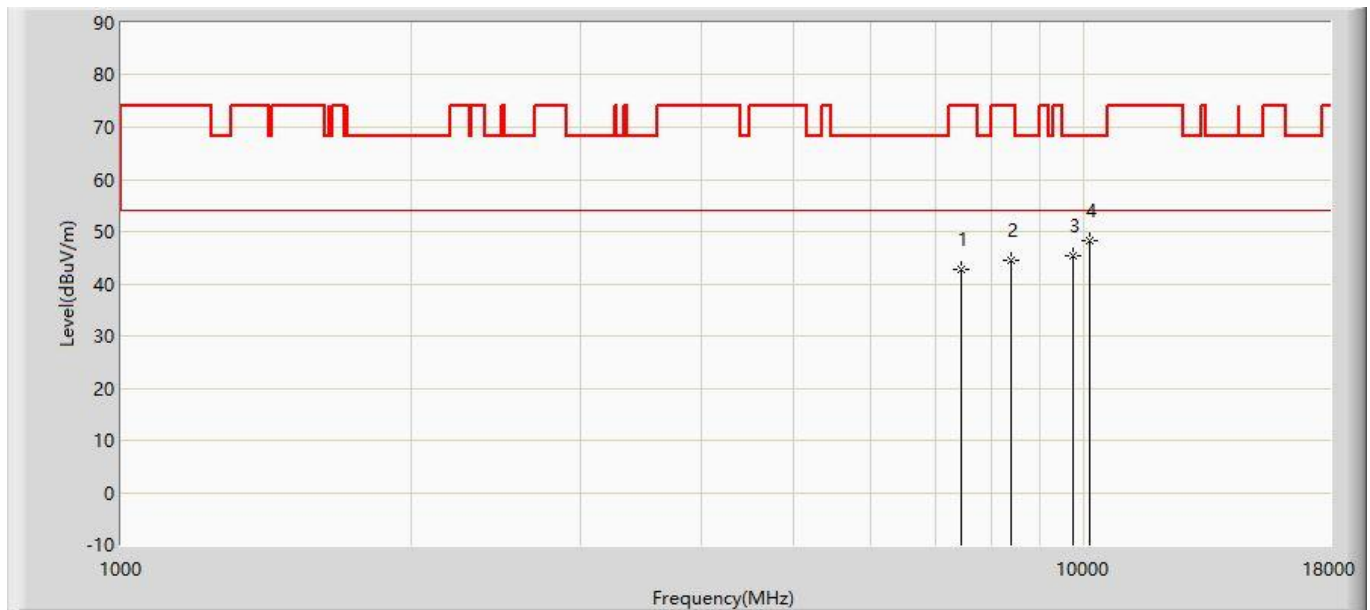

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7451.500	42.757	31.150	-31.243	74.000	11.607	PK
2			8386.500	44.483	32.079	-29.517	74.000	12.404	PK
3			9738.000	45.261	30.860	-22.939	68.200	14.401	PK
4		*	10129.000	48.321	32.646	-19.879	68.200	15.675	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	45.007	33.184	-28.993	74.000	11.822	PK
2			8369.500	45.557	33.160	-28.443	74.000	12.397	PK
3			9661.500	46.986	32.836	-21.214	68.200	14.151	PK
4		*	10392.500	48.696	32.173	-19.504	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz with OAW-AP1362 (CDD Mode)	

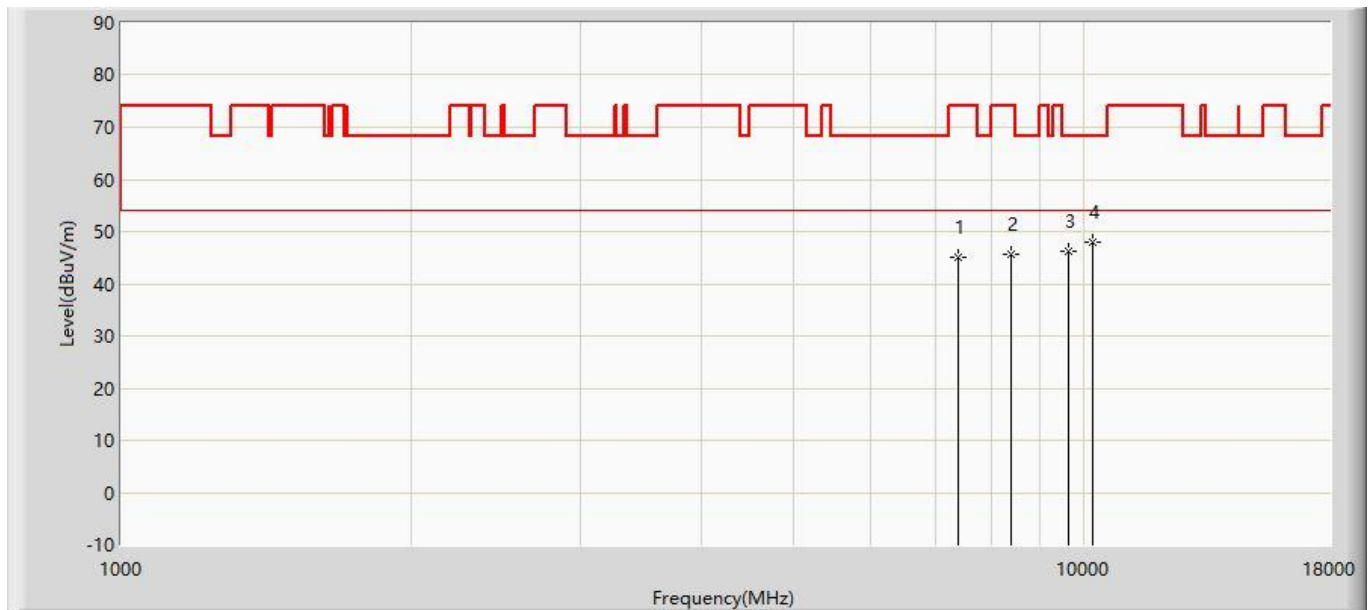


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7409.000	45.161	33.649	-28.839	74.000	11.512	PK
2			8395.000	45.617	33.209	-28.383	74.000	12.408	PK
3			9636.000	46.245	32.179	-21.955	68.200	14.066	PK
4		*	10214.000	47.984	32.035	-20.216	68.200	15.949	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5785MHz with OAW-AP1362 (CDD Mode)	

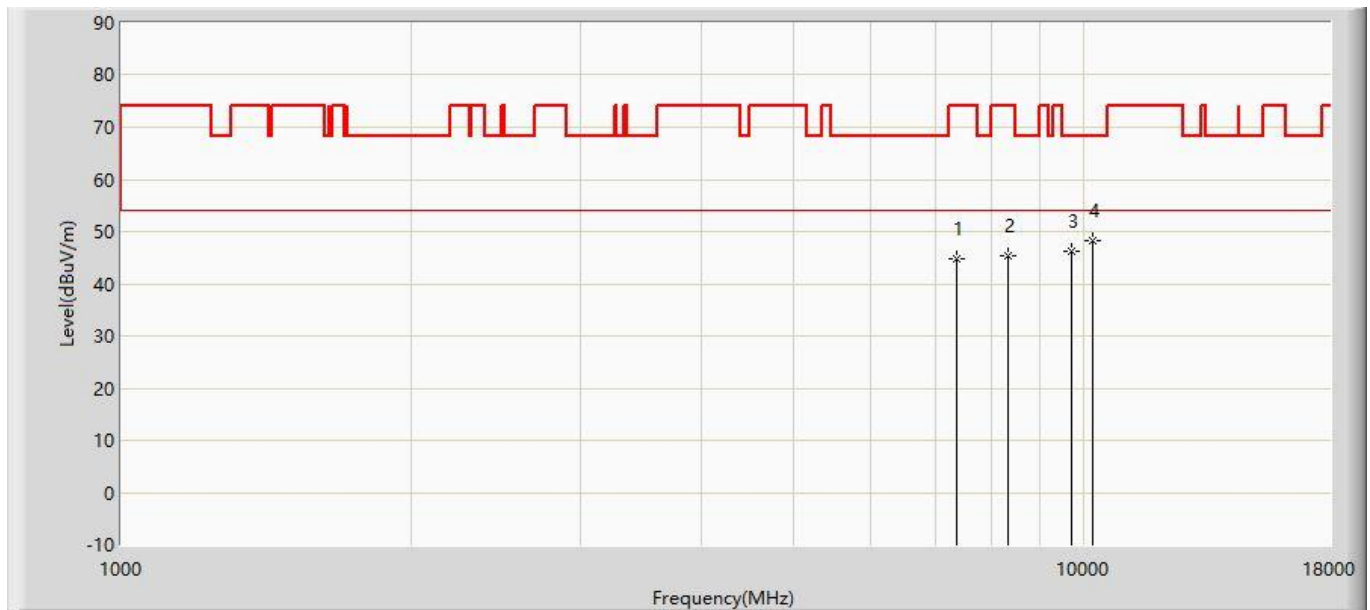


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7383.500	44.786	33.332	-29.214	74.000	11.455	PK
2			8327.000	45.226	32.849	-28.774	74.000	12.377	PK
3			9695.500	46.232	31.971	-21.968	68.200	14.261	PK
4		*	10205.500	48.143	32.221	-20.057	68.200	15.922	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5785MHz with OAW-AP1362 (CDD Mode)	

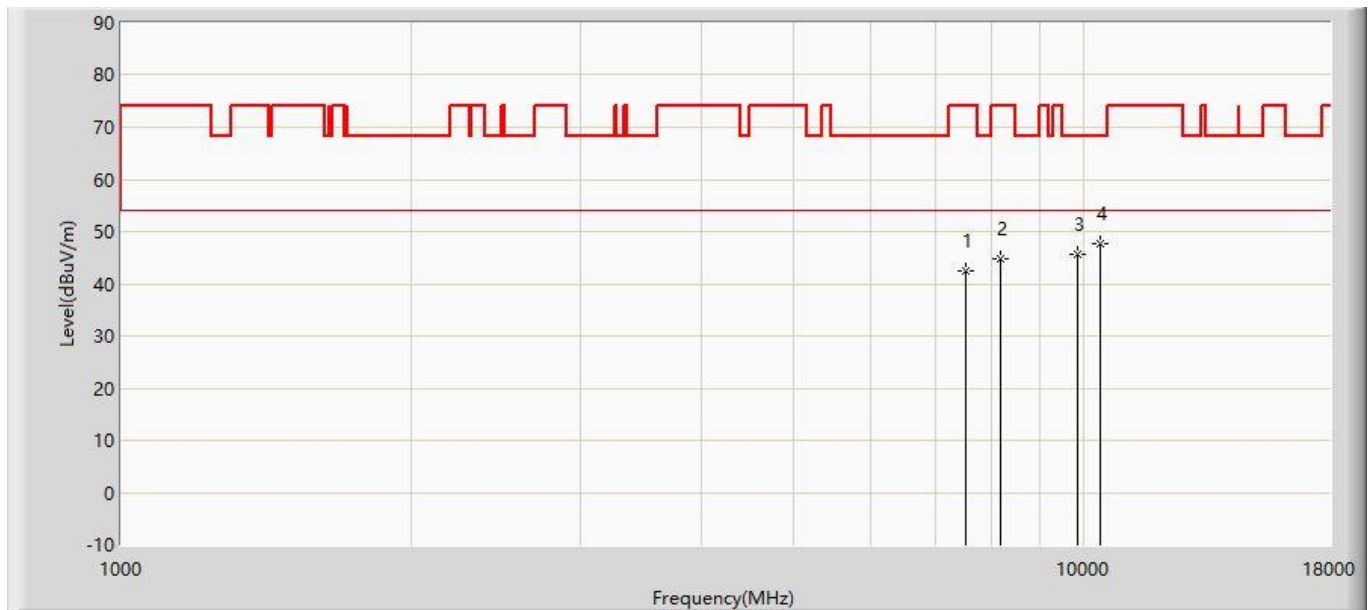


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	42.455	30.703	-31.545	74.000	11.752	PK
2			8182.500	44.795	32.483	-29.205	74.000	12.312	PK
3			9831.500	45.756	31.049	-22.444	68.200	14.707	PK
4		*	10384.000	47.711	31.215	-20.489	68.200	16.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz with OAW-AP1362 (CDD Mode)	

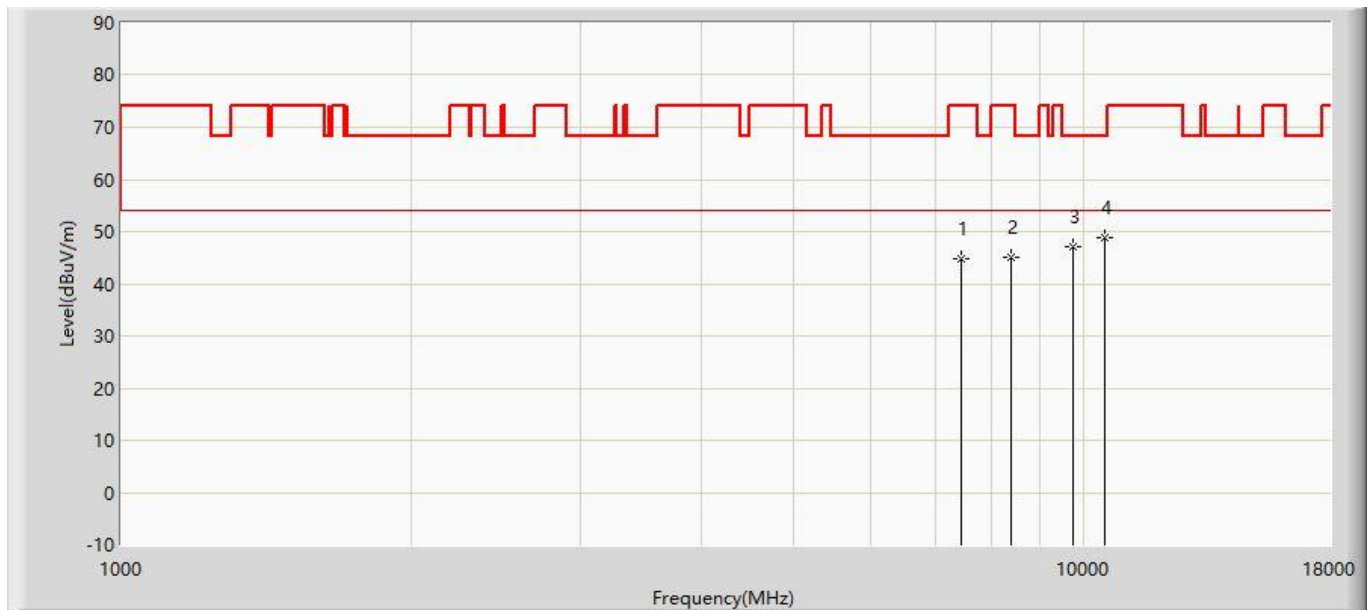


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7460.000	44.668	33.042	-29.332	74.000	11.626	PK
2			8395.000	45.140	32.732	-28.860	74.000	12.408	PK
3			9738.000	47.009	32.608	-21.191	68.200	14.401	PK
4		*	10494.500	48.809	31.960	-19.391	68.200	16.849	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz with OAW-AP1362 (CDD Mode)	

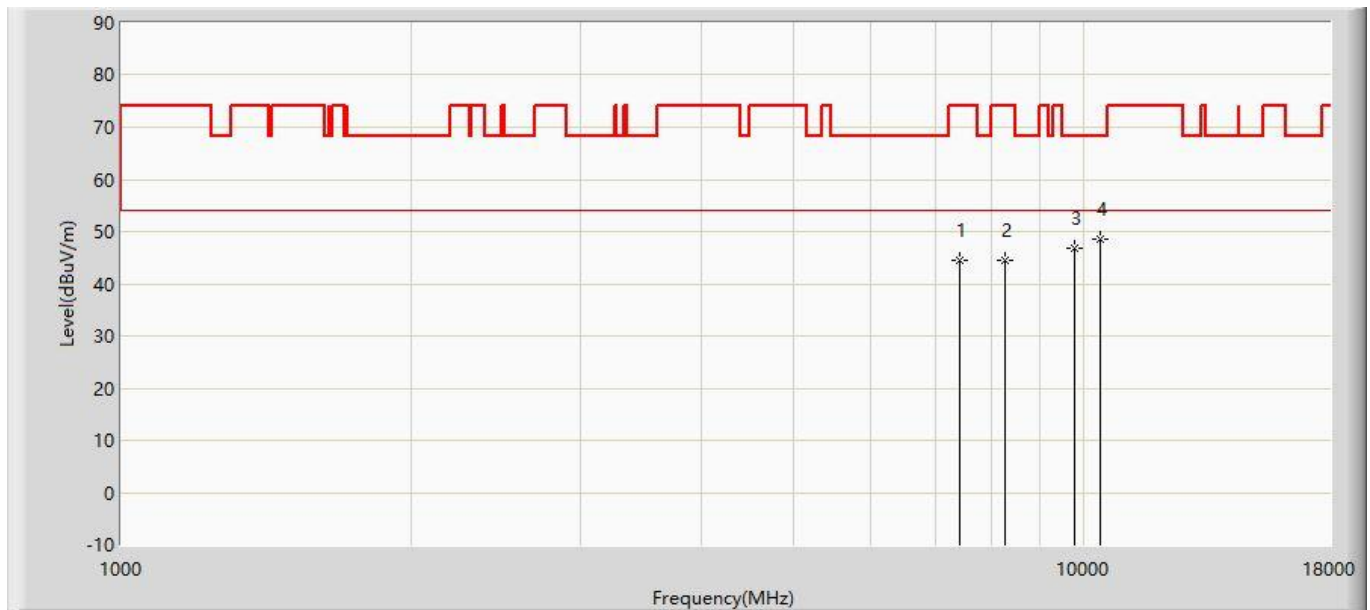


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7417.500	44.448	32.917	-29.552	74.000	11.530	PK
2			8284.500	44.419	32.061	-29.581	74.000	12.358	PK
3			9772.000	46.867	32.355	-21.333	68.200	14.512	PK
4		*	10375.500	48.614	32.145	-19.586	68.200	16.470	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz with OAW-AP1362 (CDD Mode)	

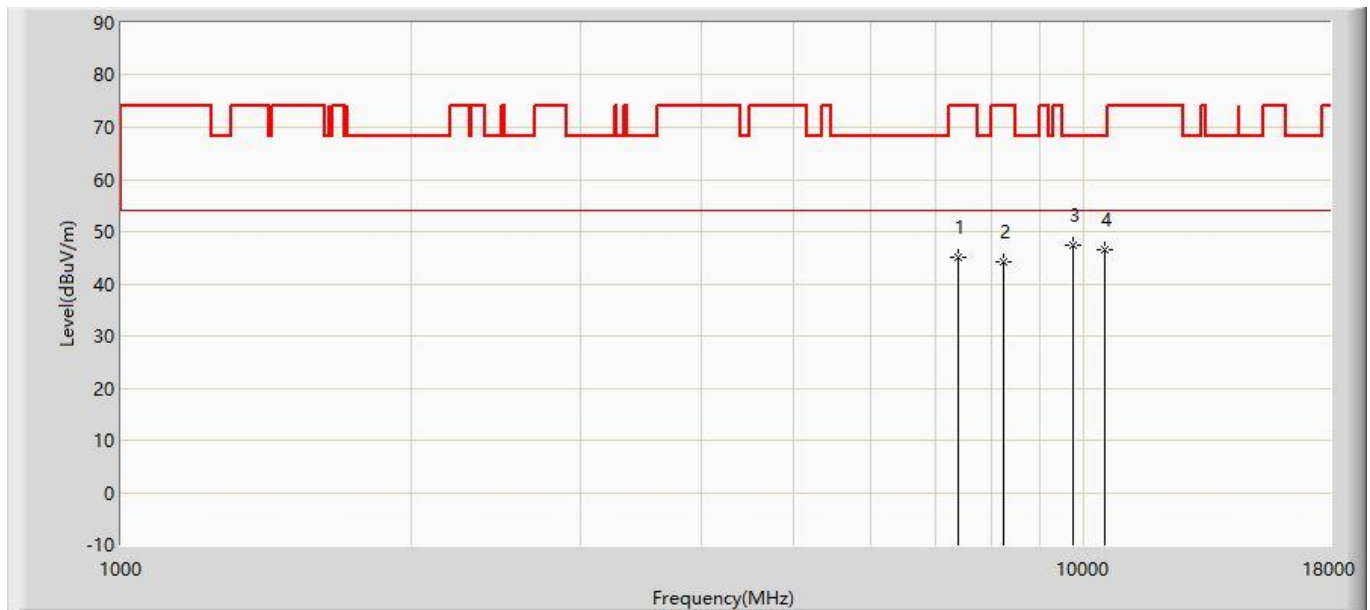


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	45.188	33.695	-28.812	74.000	11.493	PK
2			8233.500	44.268	31.933	-29.732	74.000	12.335	PK
3		*	9738.000	47.388	32.987	-20.812	68.200	14.401	PK
4			10494.500	46.458	29.609	-21.742	68.200	16.849	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz with OAW-AP1362 (CDD Mode)	

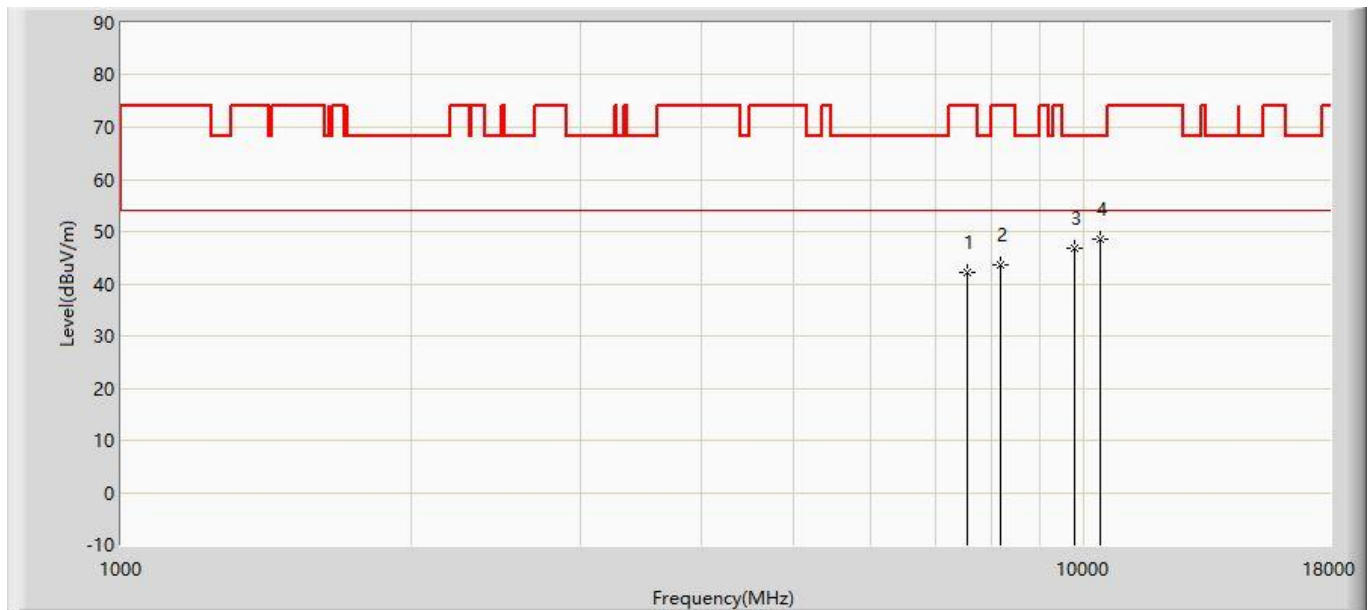

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7562.000	42.145	30.365	-31.855	74.000	11.780	PK
2			8199.500	43.676	31.356	-30.324	74.000	12.320	PK
3			9763.500	46.950	32.466	-21.250	68.200	14.485	PK
4		*	10392.500	48.575	32.052	-19.625	68.200	16.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5230MHz with OAW-AP1362 (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7613.000	45.172	33.341	-28.828	74.000	11.831	PK
2			8225.000	44.333	32.001	-29.667	74.000	12.332	PK
3			9661.500	47.355	33.205	-20.845	68.200	14.151	PK
4		*	10146.000	48.300	32.570	-19.900	68.200	15.730	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5230MHz with OAW-AP1362 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	44.952	33.129	-29.048	74.000	11.822	PK
2			8310.000	44.357	31.988	-29.643	74.000	12.369	PK
3			10154.500	48.016	32.258	-20.184	68.200	15.759	PK
4		*	10392.500	49.584	33.061	-18.616	68.200	16.524	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5270MHz with OAW-AP1362 (CDD Mode)	

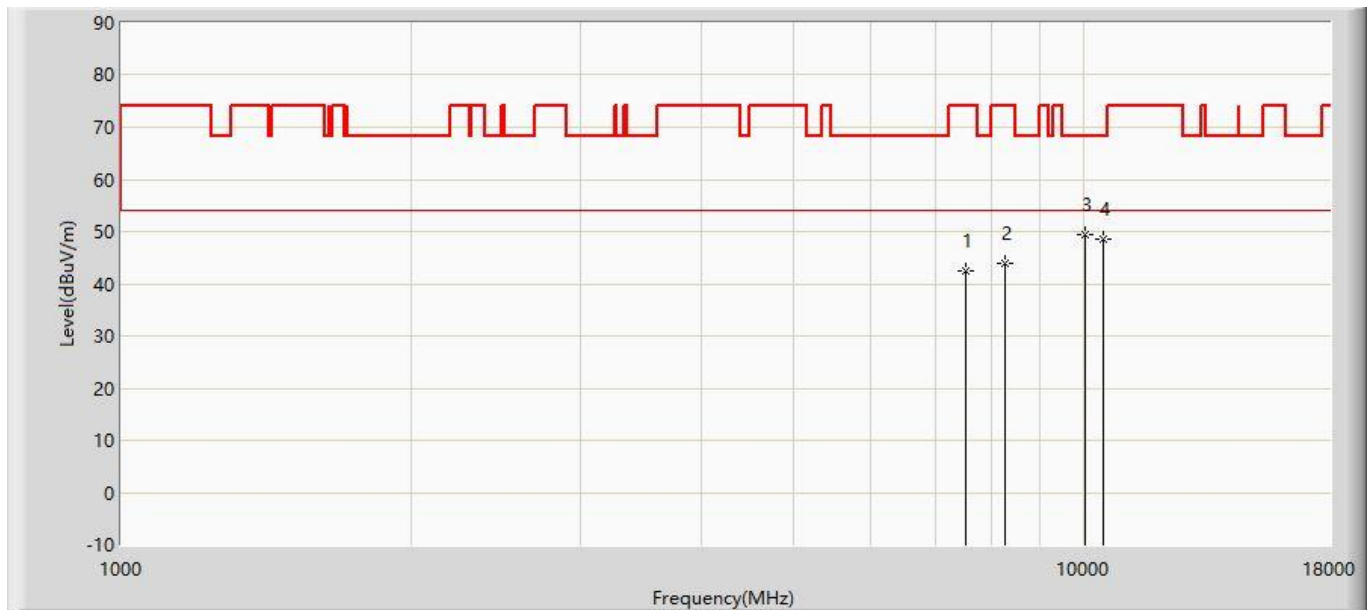


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	42.463	30.711	-31.537	74.000	11.752	PK
2			8276.000	43.801	31.447	-30.199	74.000	12.354	PK
3		*	10010.000	49.356	34.064	-18.844	68.200	15.292	PK
4			10486.000	48.626	31.801	-19.574	68.200	16.825	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 15:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at channel 5270MHz with OAW-AP1362 (CDD Mode)	

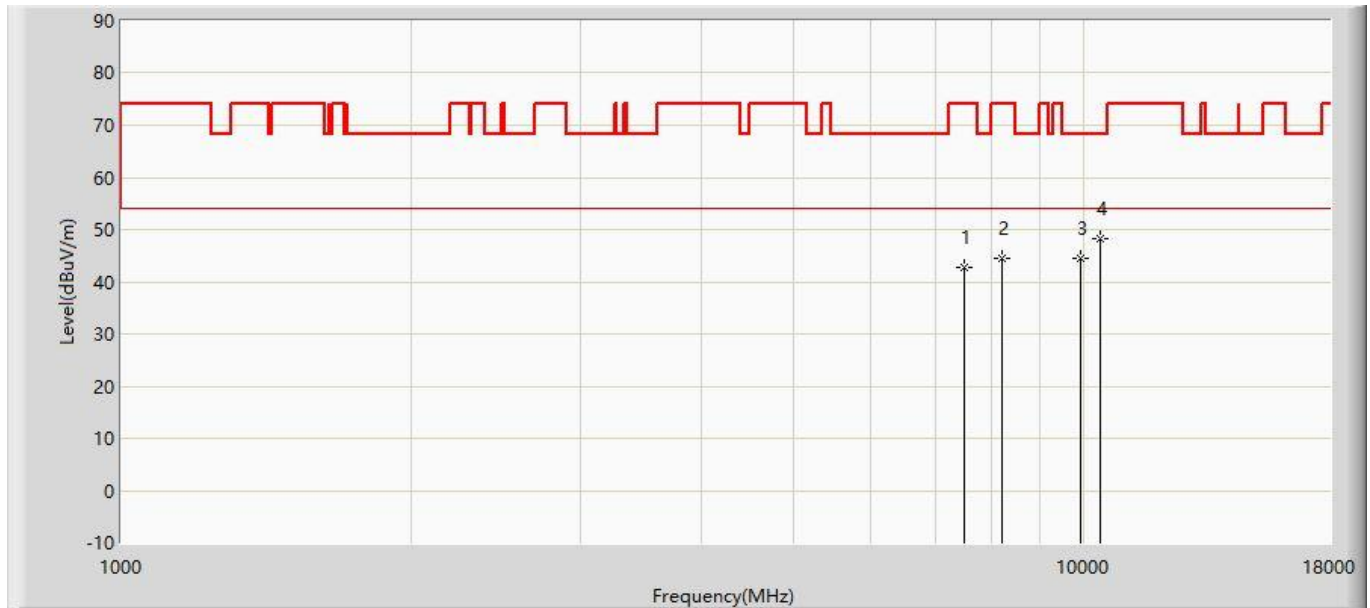

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	42.807	31.093	-31.193	74.000	11.714	PK
2			8216.500	44.392	32.064	-29.608	74.000	12.328	PK
3			9899.500	44.626	29.695	-23.574	68.200	14.931	PK
4		*	10384.000	48.143	31.647	-20.057	68.200	16.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).