


TX (IEEE 802.11ax (HEW20) Mode) _5540MHz

Radar signal 0

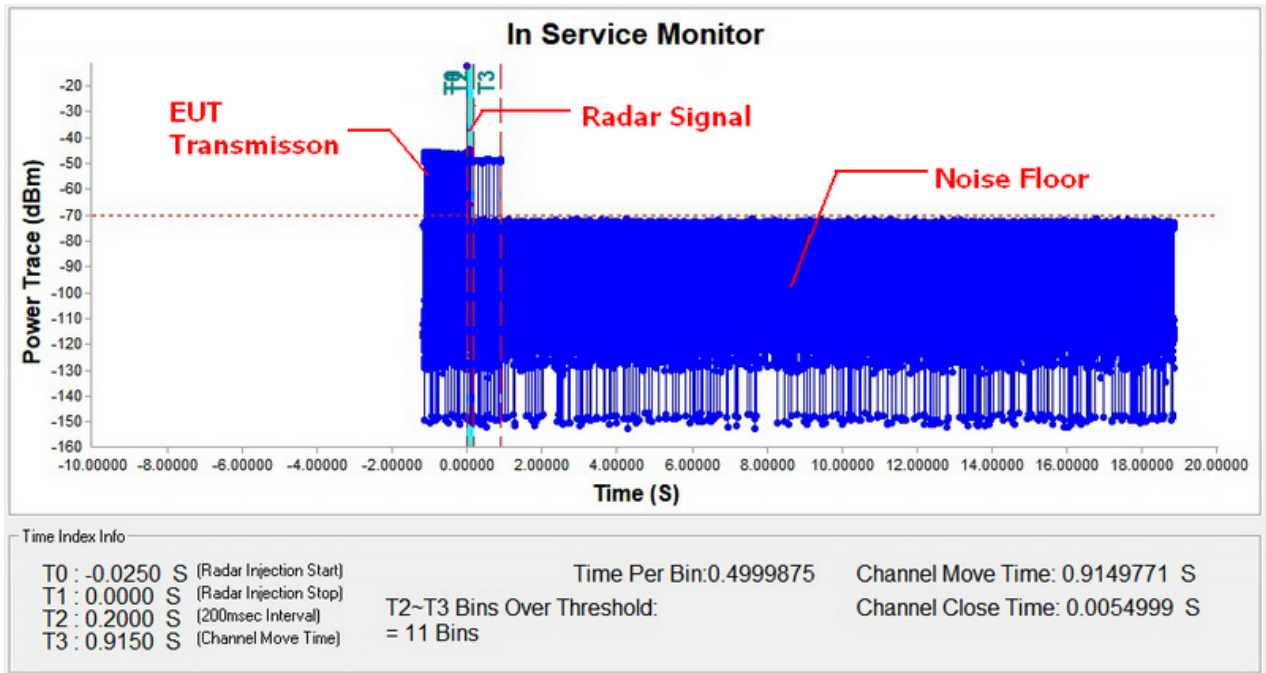


Note: T0 denotes the Radar Injection Start.

T1 denotes the start of Channel Move Time upon the end of the last Radar burst.

T2 denotes the data transmission time of 200ms from T1.


T3 denotes the end of Channel Move Time.

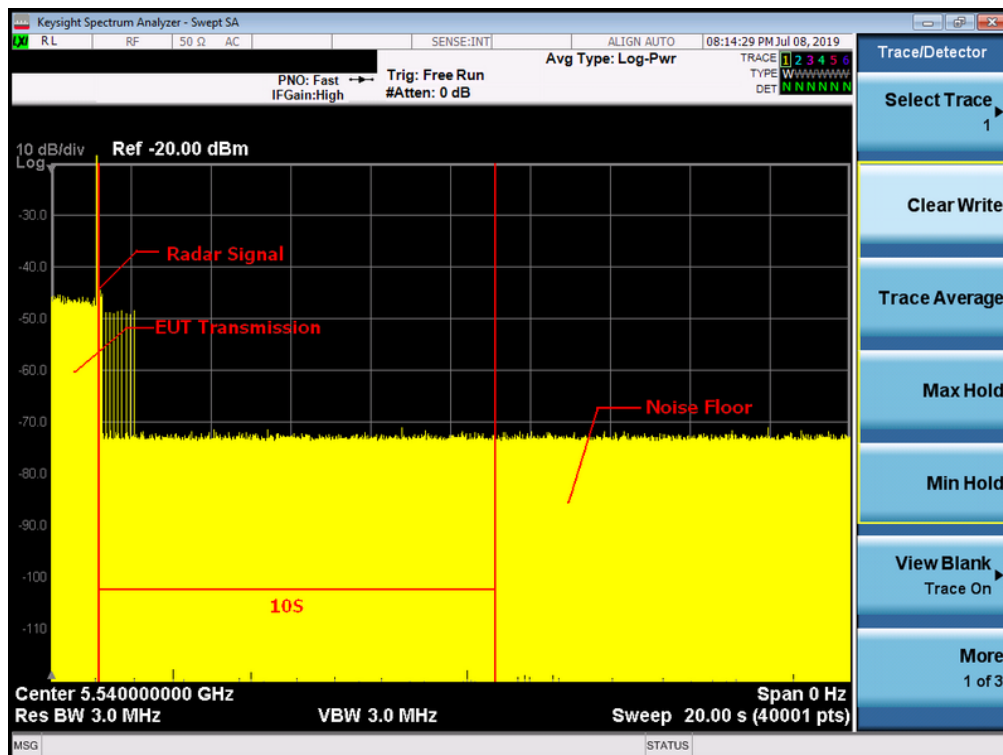

Note: An expanded plot for the device vacates the channel in the required 500ms

TX (IEEE 802.11ax (HEW40) Mode) _5550MHz

Radar signal 0

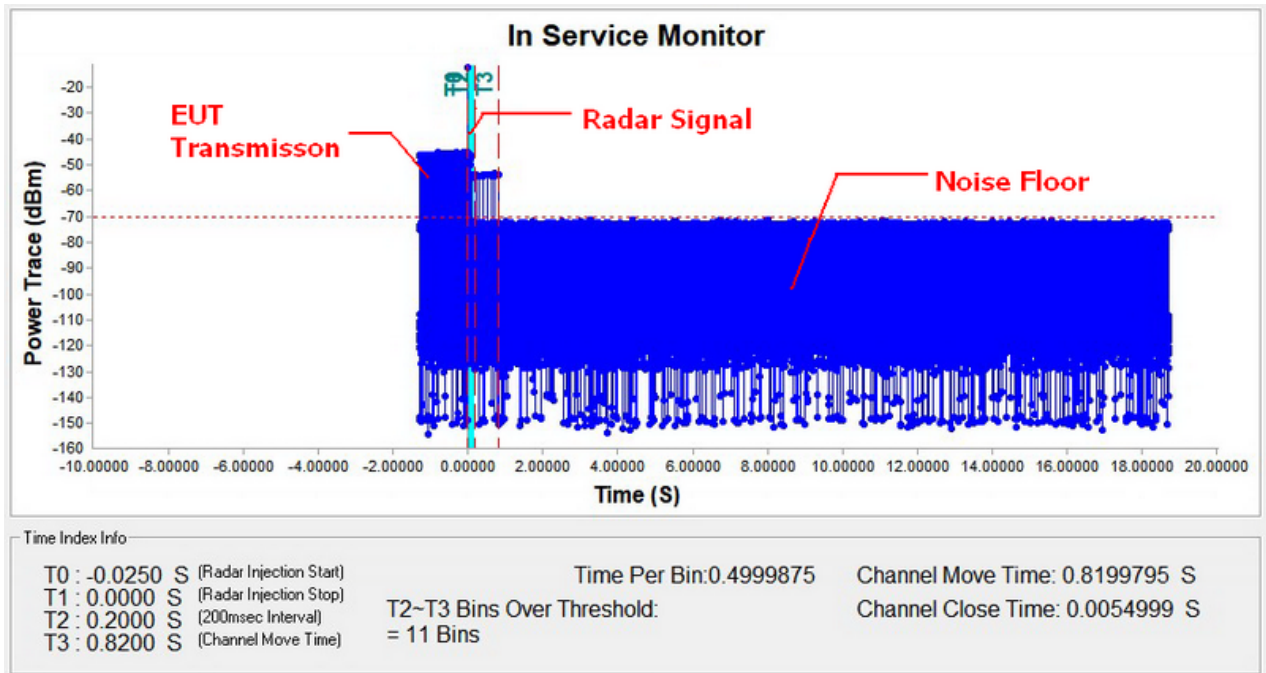


Note: T0 denotes the Radar Injection Start.

T1 denotes the start of Channel Move Time upon the end of the last Radar burst.

T2 denotes the data transmission time of 200ms from T1.


T3 denotes the end of Channel Move Time.

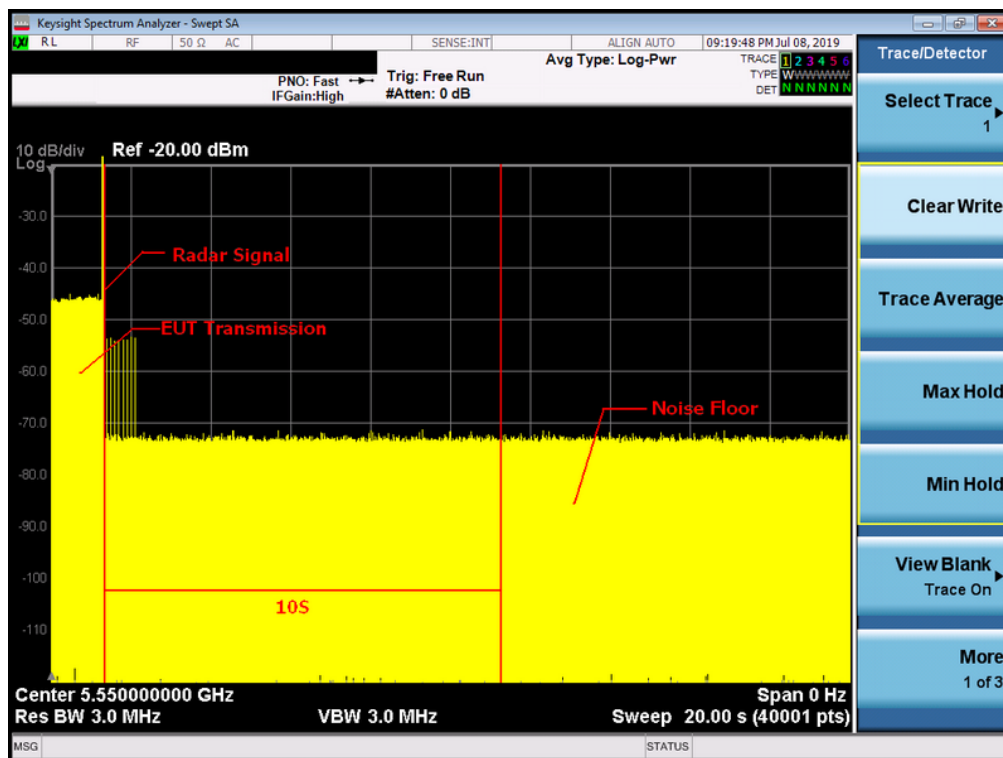

Note: An expanded plot for the device vacates the channel in the required 500ms

TX (IEEE 802.11ax (HEW80) Mode) _5530MHz

Radar signal 0

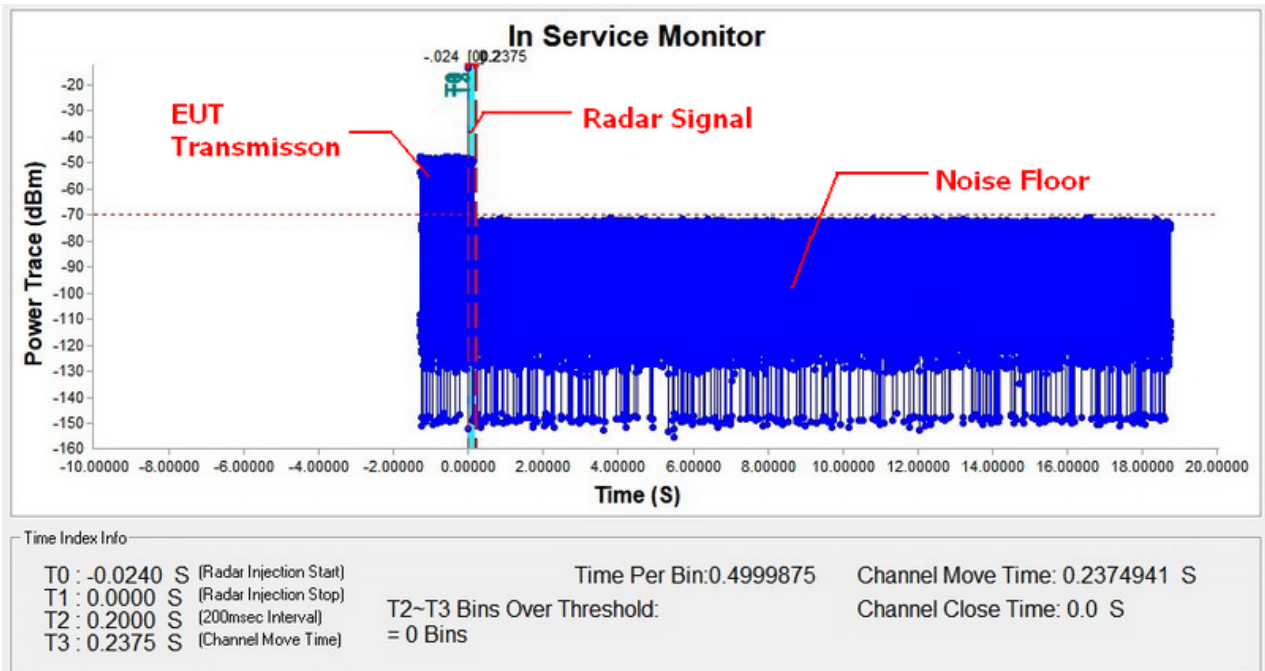


Note: T0 denotes the Radar Injection Start.

T1 denotes the start of Channel Move Time upon the end of the last Radar burst.

T2 denotes the data transmission time of 200ms from T1.


T3 denotes the end of Channel Move Time.

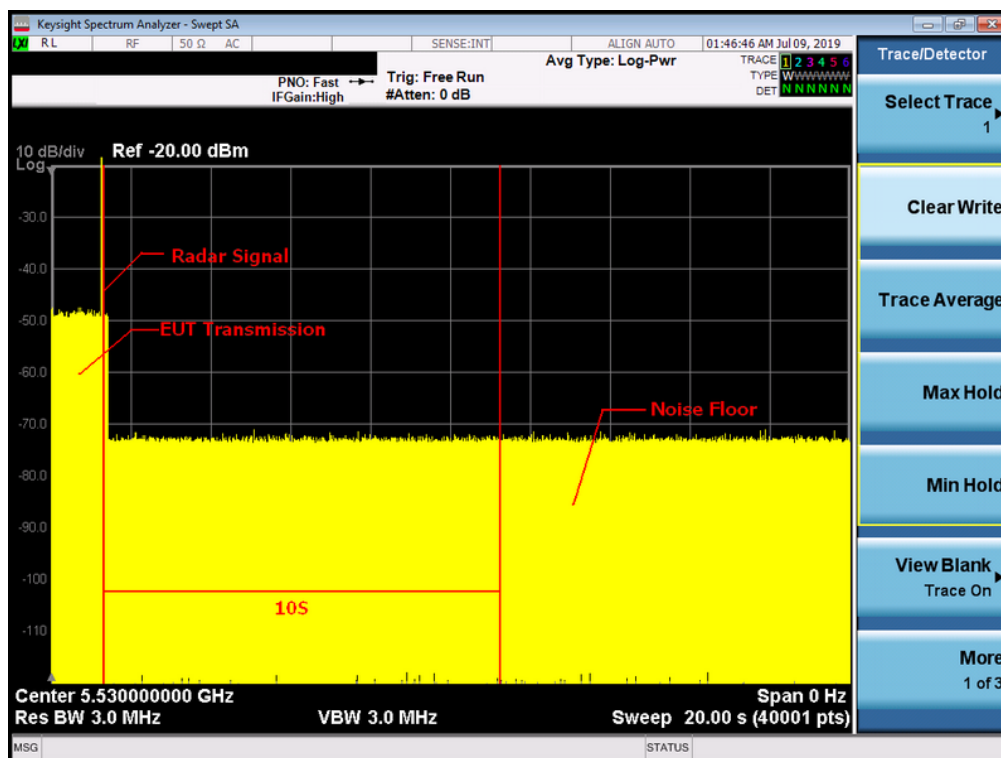

Note: An expanded plot for the device vacates the channel in the required 500ms

TX (IEEE 802.11ax (HEW160) Mode) _5250MHz

Radar signal 0

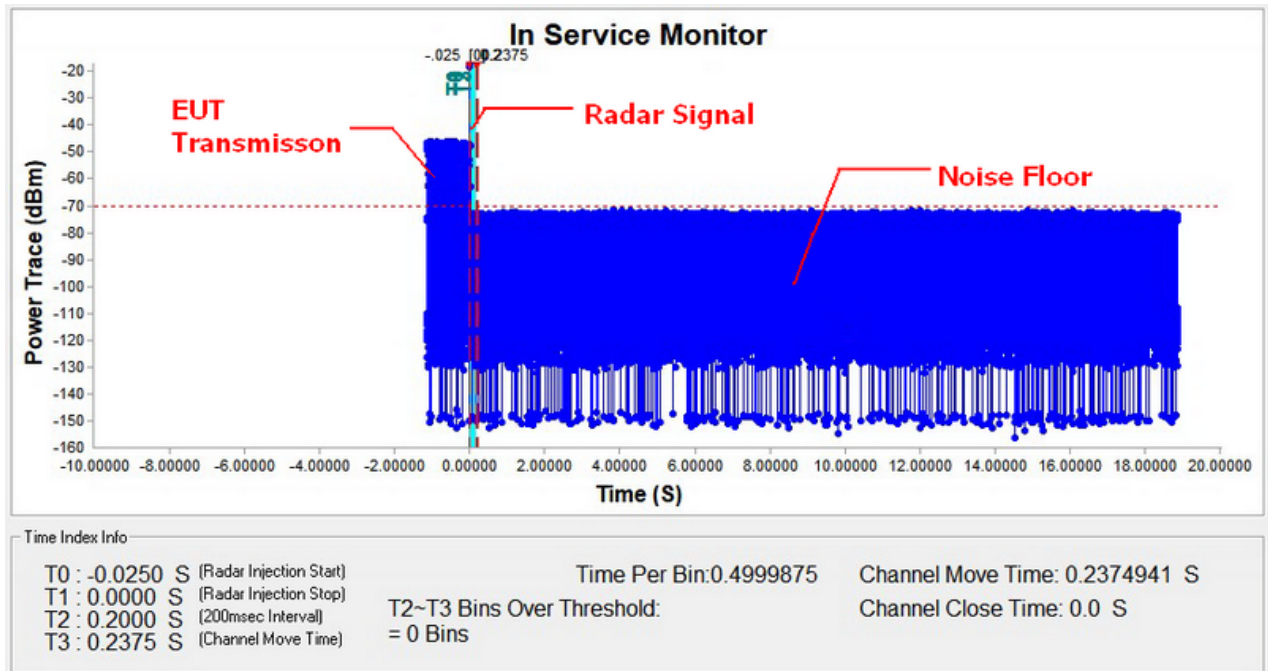


Note: T0 denotes the Radar Injection Start.

T1 denotes the start of Channel Move Time upon the end of the last Radar burst.

T2 denotes the data transmission time of 200ms from T1.


T3 denotes the end of Channel Move Time.

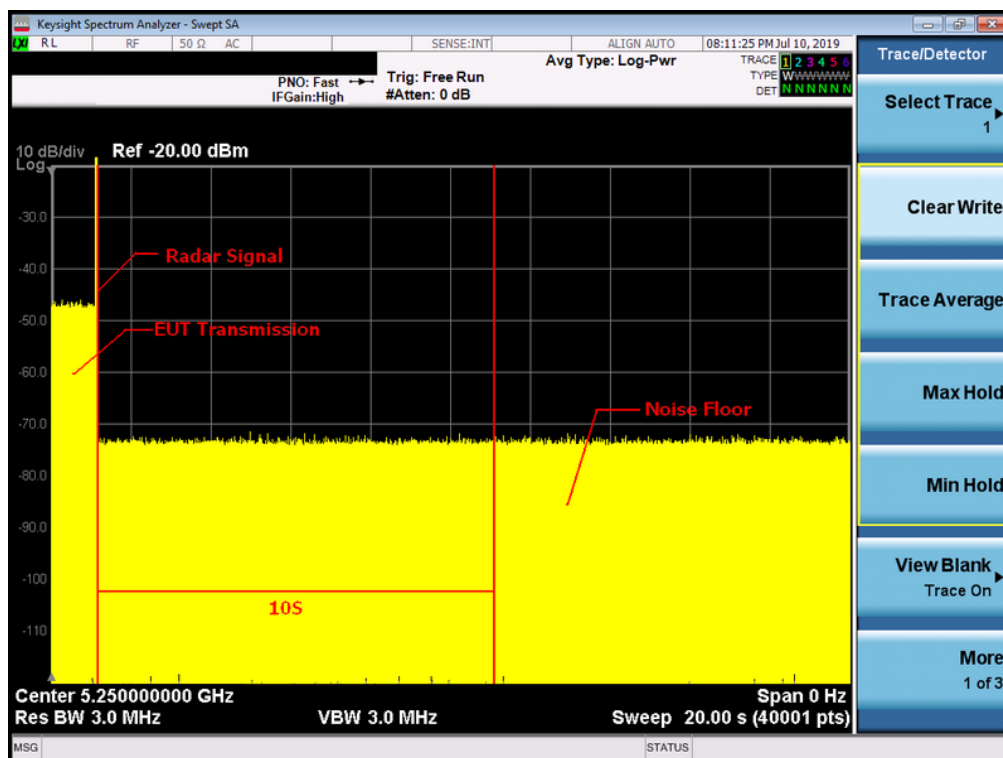

Note: An expanded plot for the device vacates the channel in the required 500ms

TX (IEEE 802.11ax (HEW160) Mode) _5570MHz

Radar signal 0

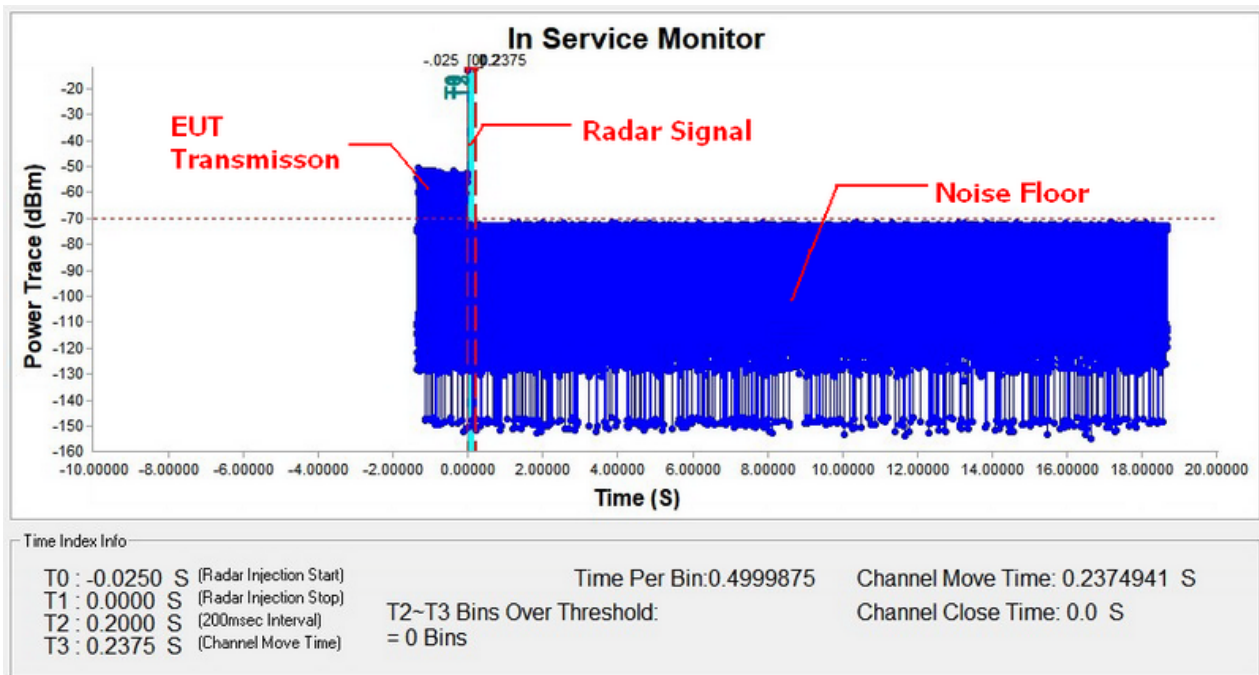


Note: T0 denotes the Radar Injection Start.

T1 denotes the start of Channel Move Time upon the end of the last Radar burst.

T2 denotes the data transmission time of 200ms from T1.

T3 denotes the end of Channel Move Time.

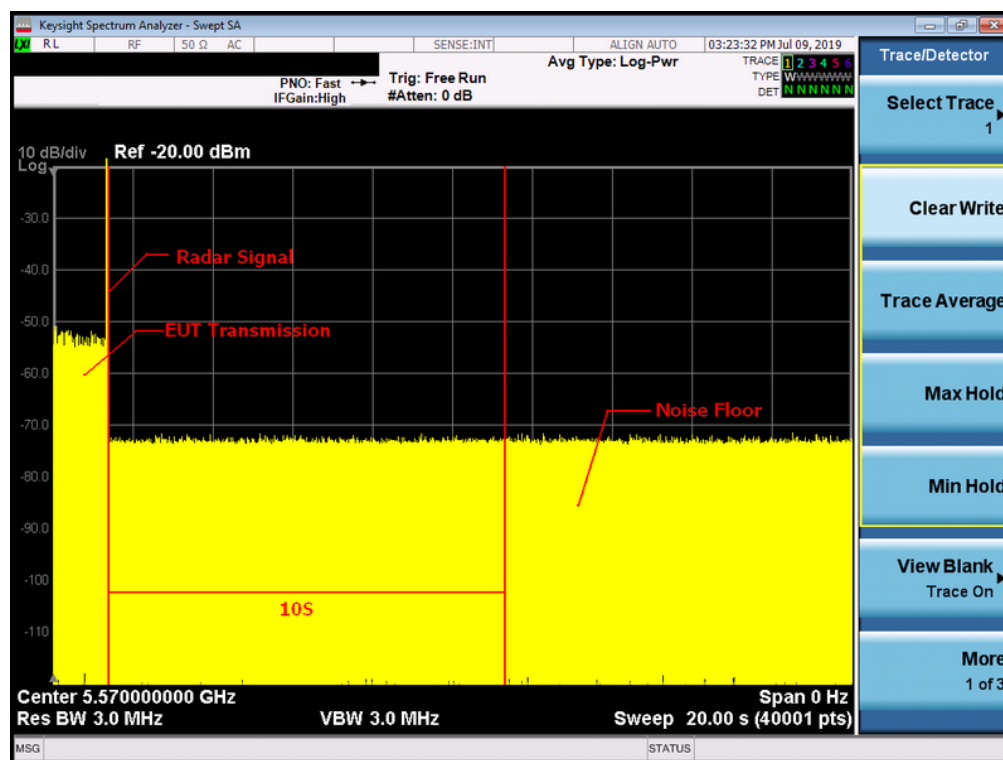

Note: An expanded plot for the device vacates the channel in the required 500ms

IEEE 802.11ax (HEW20) Mode_5540MHz		
Item	Measured Value(s)	Limit(s)
Channel Move Time	0.9149771	10
Channel Close Time	0.0054999	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period

IEEE 802.11ax (HEW40) Mode_5550MHz		
Item	Measured Value(s)	Limit(s)
Channel Move Time	0.8199795	10
Channel Close Time	0.0054999	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period

IEEE 802.11ax (HEW80) Mode_5530MHz		
Item	Measured Value(s)	Limit(s)
Channel Move Time	0.2374941	10
Channel Close Time	0.0	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period


IEEE 802.11ax (HEW160) Mode_5250MHz		
Item	Measured Value(s)	Limit(s)
Channel Move Time	0.2374941	10
Channel Close Time	0.0	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period

IEEE 802.11ax (HEW160) Mode_5570MHz		
Item	Measured Value(s)	Limit(s)
Channel Move Time	0.2374941	10
Channel Close Time	0.0	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period


6.5 NON-OCCUPANCY PERIOD

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.


TX (IEEE 802.11a Mode) 5540MHz_Non-Occupancy period

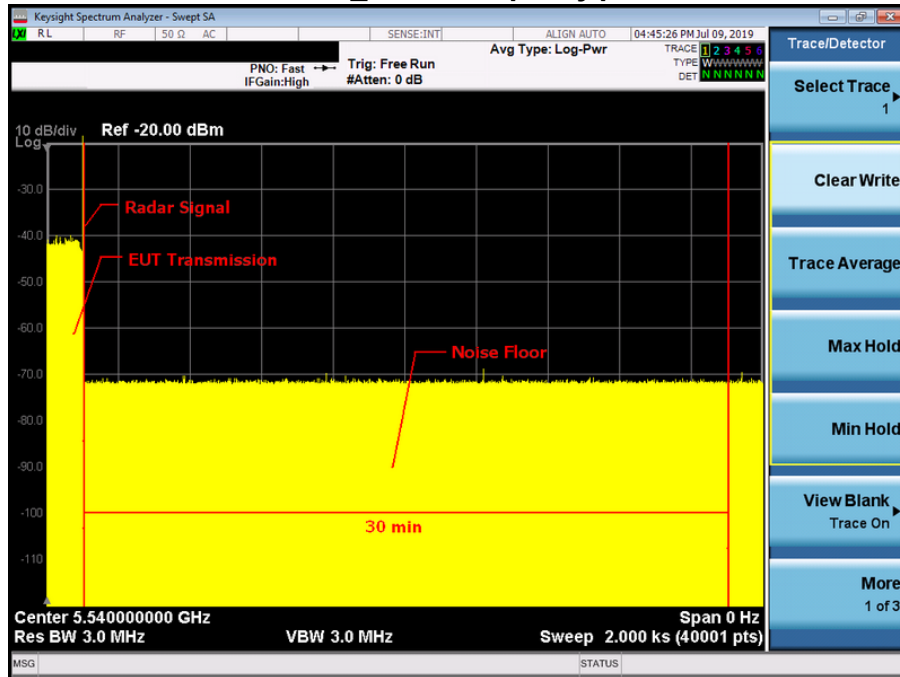


TX (IEEE 802.11n (HT40) Mode) 5550MHz_Non-Occupancy period

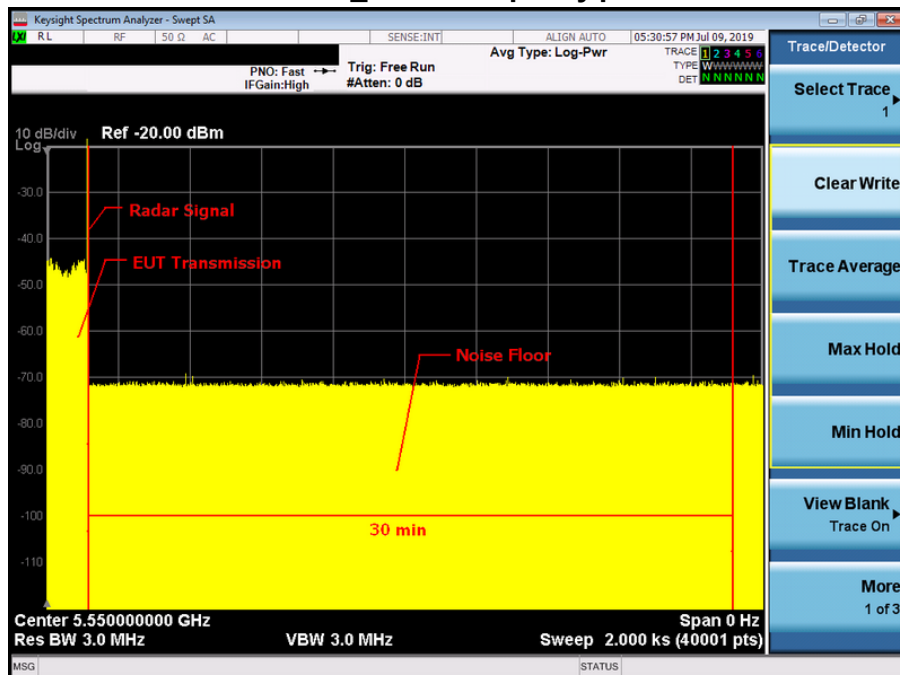


**TX (IEEE 802.11ac (VHT80) Mode)
5530MHz_Non-Occupancy period**

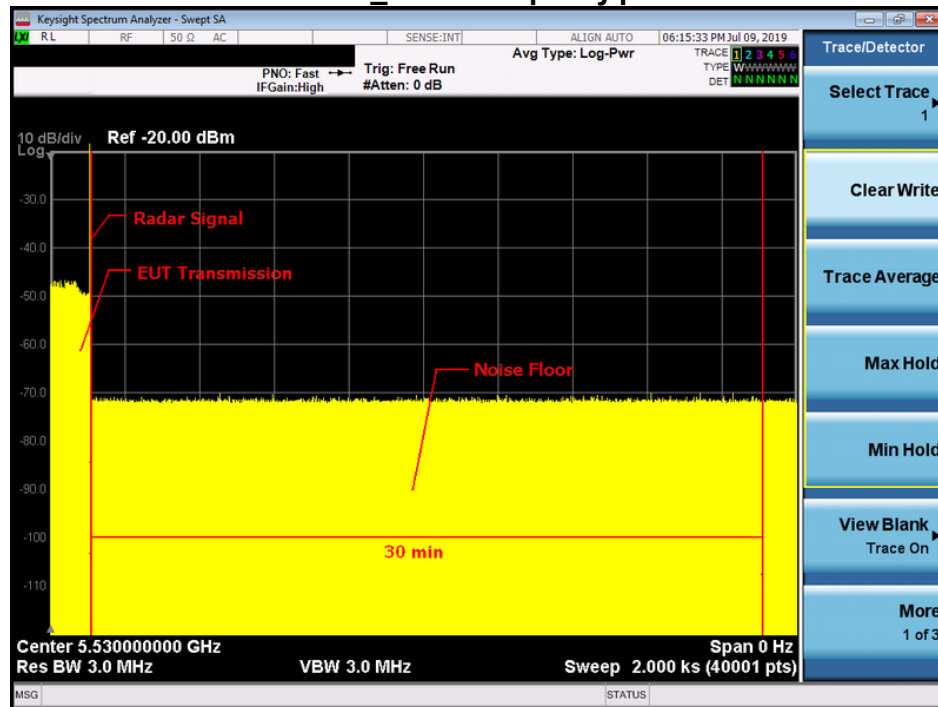


**TX (IEEE 802.11ac (VHT160) Mode)
5250MHz_Non-Occupancy perrod**

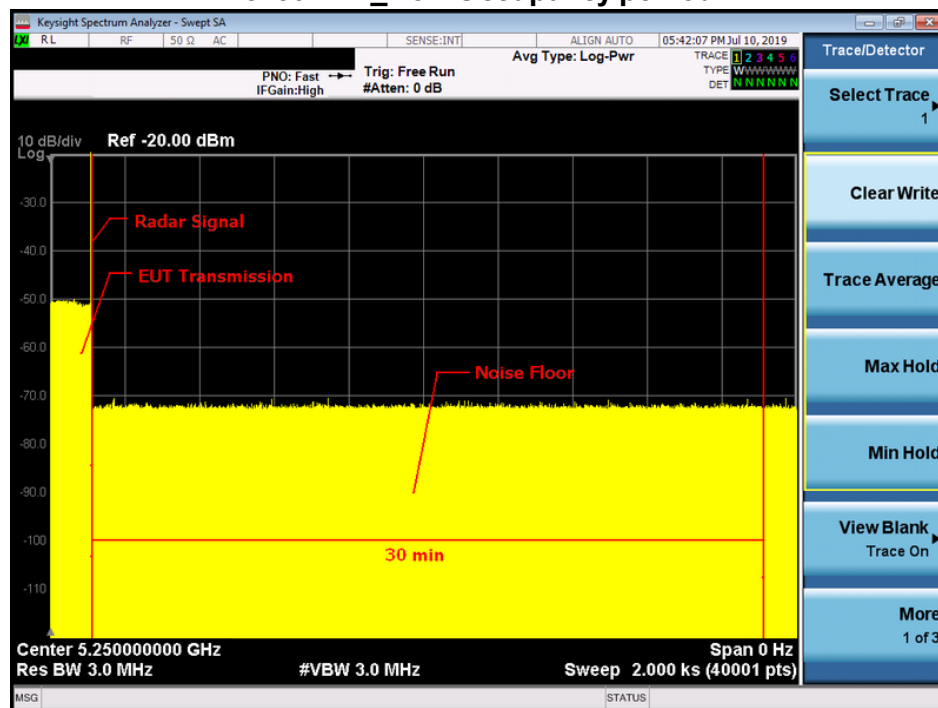


TX (IEEE 802.11ac (VHT160) Mode) 5570MHz_Non-Occupancy perrod

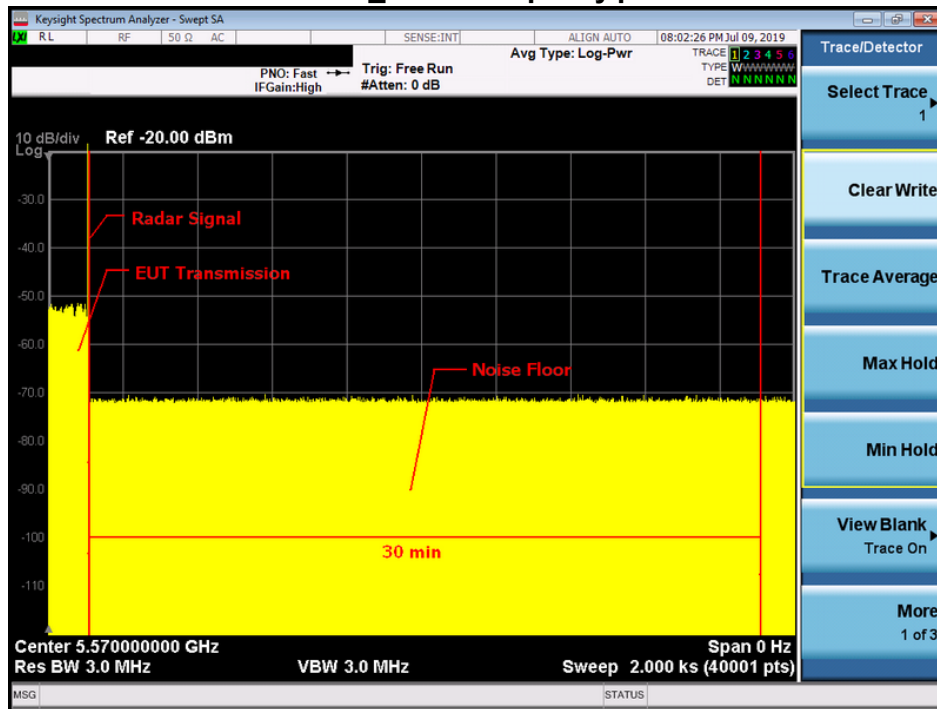


TX (IEEE 802.11ax (HEW20) Mode) 5540MHz_Non-Occupancy period

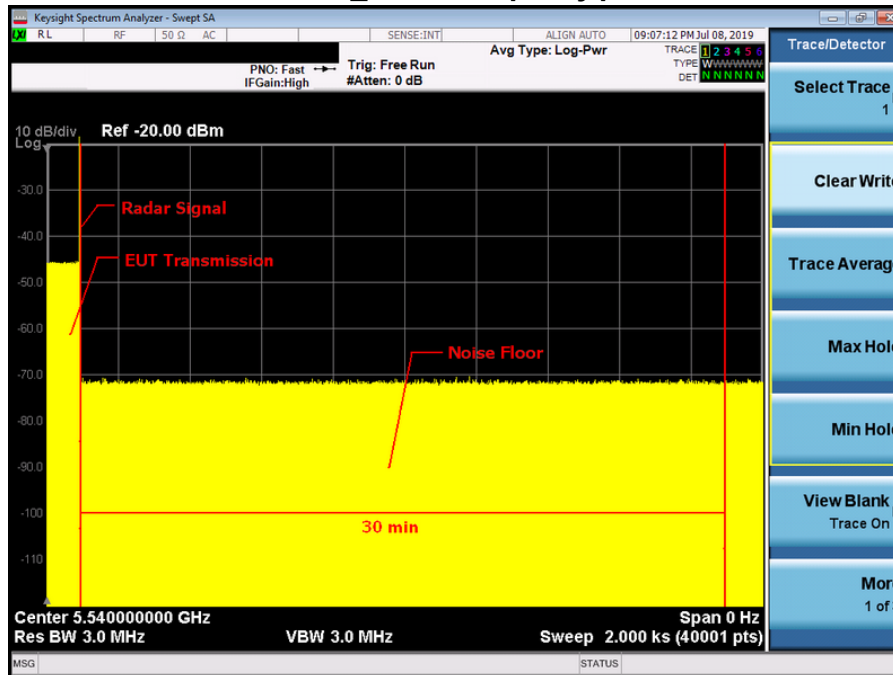


TX (IEEE 802.11ax (HEW40) Mode) 5550MHz_Non-Occupancy period

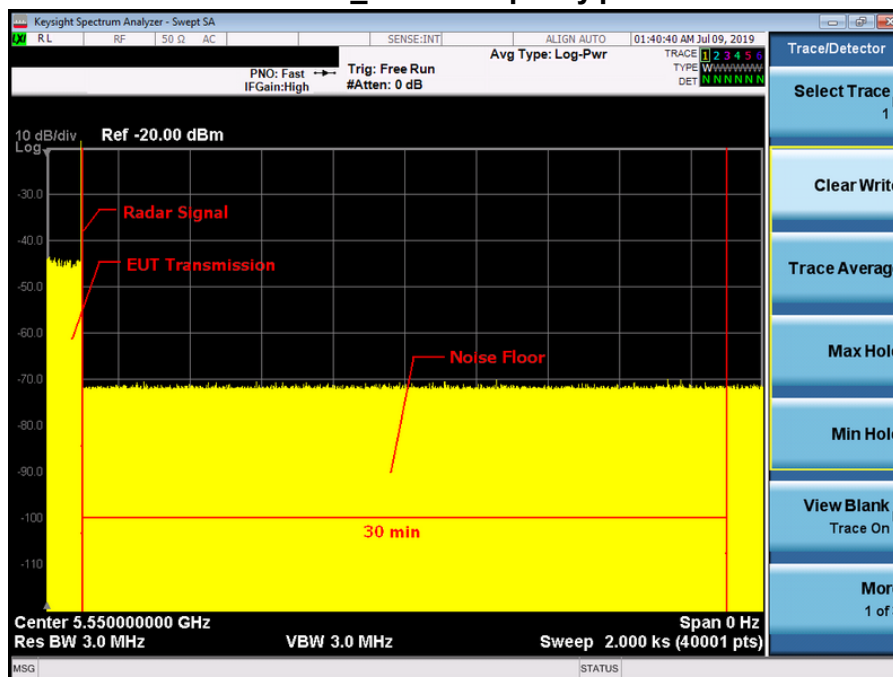

TX (IEEE 802.11ax (HEW80) Mode) 5530MHz_Non-Occupancy period

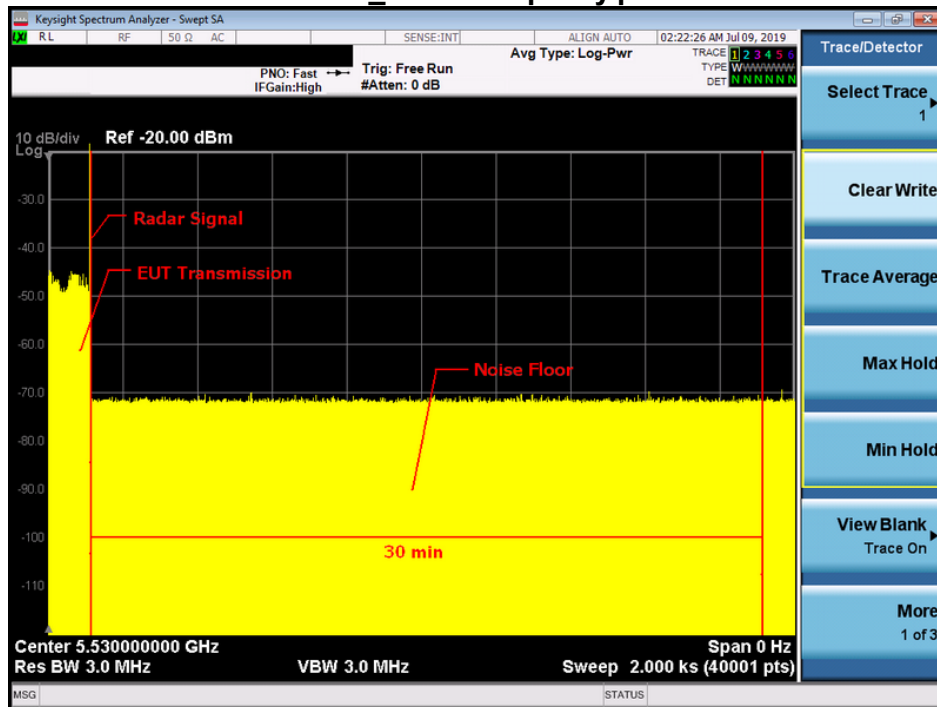

TX (IEEE 802.11ax (HEW160) Mode) 5250MHz_Non-Occupancy period

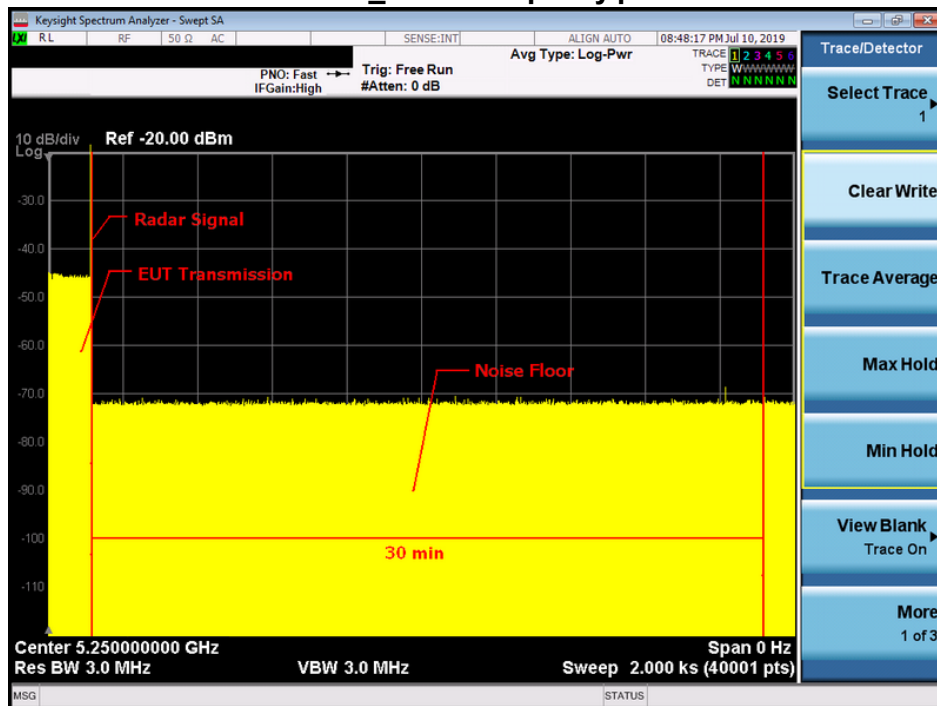

TX (IEEE 802.11ax (HEW160) Mode) 5570MHz_Non-Occupancy period

